



505 ELKTON DRIVE COLORADO SPRINGS, CO 80907 PHONE (719) 531-5599 FAX (719) 531-5238

WASTEWATER STUDY ROLLIN RIDGE ESTATES HODGEN ROAD AND HIGHWAY 83 – SOUTHWEST CORNER EL PASO COUNTY, COLORADO

Prepared for

Carl Turse 17572 Colonial Park Drive Monument, Colorado 80132

> November 12, 2019 Revised February 19, 2020

Respectfully Submitted,

ENTECH ENGINEERING, INC.

Logan L. Langford, P.G. Geologist

LLL/nc

Encl.

Entech Job No. 170837 AAprojects/2017/170837 countysoil/geo/ww Reviewed by:




TABLE OF CONTENTS

1.0	SUMMARY	7
1.0	SUMMARY	2
2.0	GENERAL SITE CONDITIONS AND PROJECT DESCRIPTION	4
3.0	SCOPE OF THE REPORT	4
4.0	FIELD INVESTIGATION	£
5.0	SOIL, GEOLOGY AND ENGINEERING GEOLOGY	e
5.1	General Geology	6
5.2	Soil Conservation Survey	6
	Site Stratigraphy	
5.4	Soil Conditions	8
5.5	Groundwater	9
6.0	ON-SITE WASTEWATER TREATMENT	9
7.0	CLOSURE	. 12
BIBL	LIOGRAPHY	. 13

TABLES

Table 1: Summary of Laboratory Test Results

Table 2: Summary of Percolation Test Results and Tactile Test Pits

FIGURES

Figure 1: Vicinity Map Figure 2: USGS Map

Figure 3: Development Plan/Test Boring Location Map

Figure 4: Soil Survey Map

Figure 5: Monument Quadrangle Geology Map Figure 6: Geology Map/Engineering Geology

Figure 7: Floodplain Map

Figure 8: Septic Suitablity Map - Residential Lots

APPENDIX A: Site Photographs

APPENDIX B: Profile Hole Logs and Test Pit Logs

APPENDIX C: Laboratory Test Results APPENDIX D: Soil Survey Descriptions APPENDIX E: Percolation Test Results

APPENDIX F: El Paso County Health Department Septic Records

Entech Engineering, Inc.

1.0 SUMMARY

Project Location

The project lies in a portion of the NE¼ of the NW¼ and the NW¼ of the NE¼ of Section 27,

Township 11 South, Range 66 West of the 6th Principal Meridian in El Paso County, Colorado.

The site is located approximately 4½ miles southeast of Monument, Colorado.

Project Description

Total acreage involved in the project is approximately 57 acres. The proposed site development

consists of sixteen single-family rural residential lots and future commercial lots in Tract B. The

development will utilize individual wells and on-site wastewater treatment systems.

Scope of Report

This report presents the results of wastewater study for individual and commercial on-site

wastewater treatment systems.

Land Use and Engineering Geology

This site was found to be suitable for the proposed development. Areas were encountered

where the geologic conditions will impose some constraints on development and land use.

These include areas of artificial fill, expansive soils, and seasonal shallow groundwater areas.

Based on the proposed development plan, it appears that these areas will have some impact on

the development. These conditions will be discussed in greater detail in the report.

In general, it is our opinion that the development can be achieved if the observed geologic

conditions on site are either avoided or properly mitigated. All recommendations are subject to

the limitations discussed in the report.

Wastewater Study Rollin Ridge Estates Hodgen Road and Highway 83 El Paso County, Colorado Job No. 170837

2.0 GENERAL SITE CONDITIONS AND PROJECT DESCRIPTION

The site is located in a portion of the NE¼ of the NW¼ and the NW¼ of the NE¼ of Section 27, Township 11 South, Range 66 West of the 6th Principal Meridian in El Paso County, Colorado. The site is located approximately 4½ miles northeast of Monument, Colorado, southwest of Hodgen Road and Highway 83. The location of the site is as shown on the Vicinity Map, Figure 1.

The topography of the site consists of rolling hills that vary from gradually to moderately sloping generally to the northwest and northeast, with steep slopes along the man-made dam in the northeastern portion of the site. The drainages on site flow in northerly direction through the eastern portion of the site. Water was not observed in the pond or drainages at the time of this investigation. The site boundaries are indicated on the USGS Map, Figure 2. Previous land uses have included grazing and pasture land. The site contains primarily field grasses and weeds with areas of ponderosa pines in the southwestern and western portion of the site. An existing house is located on Lot 8 which will remain. Several pole barns are located around the area of the house and will be removed. An existing septic system and water well are located at the house. El Paso County Health Department records for the septic are included in Appendix F. Site photographs, taken June 27 and July 10, 2017, are included in Appendix A.

Total acreage involved in the proposed development is approximately 57 acres. Sixteen single-family rural residential lots are proposed and future commercial lots in Tract B. The proposed lots are approximately 2.5 to 2.8 acres each. The area will be serviced by individual wells and on-site wastewater treatment systems. The proposed Development Plan/Test Boring Location Map is presented in Figure 3.

3.0 SCOPE OF THE REPORT

The scope of the report will include the following:

• The site will be evaluated for individual on-site wastewater treatment systems in accordance with El Paso Land Development Code.

4.0 FIELD INVESTIGATION

Our field investigation consisted of the preparation of a geologic map of any bedrock features and significant surficial deposits. The Natural Resource Conservation Service (NRCS), previously the Soil Conservation Service (SCS) survey was also reviewed to evaluate the site. The position of mappable units within the subject property are shown on the Geologic Map. Our mapping procedures involved both field reconnaissance and measurements and air photo reconnaissance and interpretation. The same mapping procedures have also been utilized to produce the Geology/Engineering Geology Map which identified pertinent geologic conditions affecting development. The field mapping was performed by personnel of Entech Engineering, Inc. on July 10, 2017.

Two (2) percolation tests, and fourteen (14) test pits were performed on the site to determine general suitability of the site for the use of on-site wastewater treatment systems. Ten test pits were excavated in the future commercial lots for OWTS evaluations. The locations of the percolation tests, test borings, and test pits are indicated on the Development Plan/Test Boring Location Map, Figure 3. The Profile Hole and Test Pit Logs are presented in Appendix B. Results of this testing will be discussed later in this report.

Laboratory testing was also performed on some of the soils to classify and determine the soils engineering characteristics. Laboratory tests included grain-size analysis, ASTM D-422, and Atterberg Limits, ASTM D-4318. Results of the laboratory testing are included in Appendix C. A Summary of Laboratory Test Results is presented in Table 1.

5.0 SOIL, GEOLOGY AND ENGINEERING GEOLOGY

5.1 General Geology

Physiographically, the site lies in the western portion of the Great Plains Physiographic Province along the Palmer Divide. Approximately 8 miles to the west is a major structural feature known as the Rampart Range Fault. This fault marks the boundary between the Great Plains Physiographic Province and the Southern Rocky Mountain Province. The site exists within the southeastern edge of a large structural feature known as the Denver Basin. Bedrock in the area tends to be very gently dipping in a northeasterly direction (Reference 1). The rocks in the area of the site are sedimentary in nature and typically Tertiary to Upper Cretaceous in age. The bedrock underlying the site consists of the Dawson Arkose Formation. Overlying this formation are unconsolidated deposits of residual soils, man-made, and alluvial soils of the Quaternary Age. The residual soils are produced by the in-situ action of weathering of the bedrock on site. The alluvial soils were deposited by water in the major drainages on site and as stream terraces on some of the ridge lines. Man-made soils exist as earthen dams and erosion berms. The site's stratigraphy will be discussed in more detail in Section 5.3.

5.2 Soil Conservation Survey

The Natural Resource Conservation Service (Reference 2), previously the Soil Conservation Service (Reference 3) has mapped four soil types on the site (Figure 4). In general, they vary from gravelly loamy sand to sandy loam. The soils are described as follows:

<u>Type</u>	<u>Description</u>
21	Cruckton Sandy Loam, 1-9% slopes
28	Ellicott Loamy Coarse Sand, 0-5% slopes
41	Kettle Gravelly Loamy Sands, 8-40% slopes
68	Peyton-Pring Complex, 3-8% slopes

Complete descriptions of each soil type are presented in Appendix D. The soils have generally been described to typically have moderate to moderately rapid permeabilities. Roads may need to be designed to minimize frost-heave potential. Possible hazards with soil erosion are present on the site. The erosion potential can be controlled with vegetation. The majority of the soils have been described to have slight to moderate erosion hazards.

5.3 Site Stratigraphy

The Monument Quadrangle Geology Map showing the site is presented in Figure 5 (Reference 4). The Geology Map prepared for the site is presented in Figure 6. Four mappable units were identified on this site which are described as follows:

- **Recent Alluvium of Holocene Age:** These are recent deposits that have been deposited along the drainage that exist on-site. These materials typically consist of silty to clayey sands and sandy clays. Some of these alluviums contain highly organic soils.
- Qaf Recent Artificial Fill of Holocene Age: These are man-made fill deposits associated with erosion berms and earthen dams on-site.
- QTa Alluvium of Palmer Divide of Pleistocene Age: These materials consist of waterdeposited stream terrace deposits. They typically consist of silty to clayey sands with gravelly lenses and may contain areas of pebble and cobble lenses.
- Tkd Dawson Formation of Tertiary to Cretaceous Age: The Dawson formation typically consists of arkosic sandstone with interbedded fine-grained sandstone, siltstone and claystone. Overlying this formation is a variable layer of residual soil. The residual soils were derived from the in-situ weathering of the bedrock materials on-site. These soils consisted of silty to clayey sands, sandy clays and sandy silts.

The soils listed above were mapped from site-specific mapping, the *Geologic Map of the Monument Quadrangle* distributed by the Colorado Geological Survey in 2003 (Reference 4), the *Geologic Map of the Colorado Springs-Castle Rock Area*, distributed by the US Geological Survey in 1979 (Reference 5), and the *Geologic Map of the Denver 1^o x 2^o Quadrangle*, distributed by the US Geological Survey in 1981 (Reference 6). The Test Pits and Profile Holes were also used in evaluating the site and are included in Appendix B. The Geology Map prepared for the site is presented in Figure 6.

5.4 Soil Conditions

The soils encountered in the Profile Holes can be grouped into three general soil and rock types. The profile hole soils were classified using the Unified Soil Classification System (USCS). The soils encountered in the Test Pits can be grouped into three general soil types. The test pit soils were classified using the USDA Textural Soil Classification.

<u>Soil Type 1</u> is a very sandy to sandy clay and silty clay loam (CL, ML). This material was encountered in both of the profile holes and in six of the test pits. The clay and silt soils were encountered at the existing surface and extended to depths ranging from 3 to 10 feet bgs. These soils were encountered at soft to firm states and at dry to moist conditions. Samples tested had 55 to 73 percent passing the No. 200 Sieve. FHA Swell Testing on a sample of sandy clay resulted in an expansion pressure of 430 psf, which is in the low expansion range.

<u>Soil Type 2</u> is a clayey sand, sandy loam, and slightly silty to silty sand (SC, SM-SW). This material was encountered in Profile Hole No. 1 and in eight of the test pits. The sands were encountered at depths ranging from the existing surface grade to 3 feet and extended to depths ranging from 5 to 12 feet. The sands were encountered at medium dense to states and dry to moist conditions. Samples tested had 6 to 40 percent passing the No. 200 sieve. FHA Swell Testing on a sample of clayey sand resulted in an expansion pressure of 556 psf, which is in the low expansion range.

<u>Soil Type 3</u> is a slightly silty to silty sandstone and clayey sandstone (SM-SW, SM, SC). This material was encountered in Profile Hole No. 2 and in eleven of the test pits. The sandstone was encountered at depths ranging from the 1 to 12 feet and extended to the termination of the profile hole (20 feet) and test pits (8 to 9 feet). The sandstone was encountered at dense to very dense states and moist conditions. Samples tested had 9 to 25 percent passing the No. 200 sieve. The sandstones are typically non-expansive, however; expansive clayey sandstone and claystone are common in the area.

The Test Boring Logs and the Profile Hole Logs are presented in Appendix B. Laboratory Test Results are presented in Appendix C. A Summary of Laboratory Test Results is presented in Table 1.

5.5 Groundwater

Groundwater was not encountered in the profile holes which were drilled to 10 to 20 feet. Signs of seasonally occurring groundwater was observed in ten of the test pits at depths ranging from 5 to 8 feet. Areas of seasonal shallow groundwater and ponded water have been mapped in low-lying areas and in the drainage on-site. These areas are discussed in the following section. Fluctuation in groundwater conditions may occur due to variations in rainfall and other factors not readily apparent at this time.

It should be noted that in the sandy materials on site, some groundwater conditions might be encountered due to the variability in the soil profile. Isolated sand and gravel layers within the soils, sometimes only a few feet in thickness and width, can carry water in the subsurface. Groundwater may also flow on top of the underlying bedrock. Builders and planners should be cognizant of the potential for the occurrence of such subsurface water features during construction on-site and deal with each individual problem as necessary at the time of construction.

6.0 ON-SITE WASTEWATER TREATMENT

The site was evaluated for individual and commercial on-site wastewater treatment systems in accordance with El Paso Land Development Code. Two (2) percolation tests and fourteen (14) test pits were performed on the property. Percolation tests and test pits were located in potential locations of future systems. Four (4) of the test pits were excavated on the residential lots, and ten (10) of the test pits were excavated on the future commercial lots. The approximate locations of the percolation tests are indicated on Figure 3, on the Geology/Engineering Geology Map, Figure 6, and on the Septic Suitability Maps, Figures 9 and 10. A table showing the results of the percolation tests is presented in Table 2. The specific percolation test results are presented in Appendix E of this report.

The Natural Resource Conservation Service (Reference 2), previously the Soil Conservation Service (Reference 3) has been mapped with four soil descriptions. The Soil Survey Map (Reference 2) is presented in Figure 4, and the Soil Survey Descriptions are presented in Appendix D. The soils are described as having moderate to moderately rapid percolation rates.

Entech Engineering, Inc.

The percolation rates were 67 and 76 minutes per inch. Neither of the percolation rates are suitable for conventional on-site wastewater treatment systems. Both of the percolation rates are slower than 60 minutes per inch which will require designed systems. Shallow bedrock was also encountered in ten of the test pits, which will require designed systems. Additional investigation may identify areas where suitable for conventional systems could be used.

Standard penetration testing, ASTM D-1586, was performed in each profile hole to evaluate the density of the soil and the presence of bedrock. Bedrock was encountered in Profile Hole No. 2 at 12 feet. Absorption fields must be maintained a minimum of 4 feet above groundwater bedrock, or confining layer. Groundwater was not encountered in the profile holes which were drilled to depths of 10 to 20 feet. Shallow bedrock was encountered in ten (10) of the test pits at depths ranging from 1.5 to 6 feet. Should groundwater or bedrock be encountered within 6 feet of the surface, designed systems will be required.

Soils encountered in the tactile test pits consisted of loamy sand, silty clay loam and sandy clay, with underlying weathered silty to slightly silty sandstone and clayey sandstone. The limiting layers encountered in the test pits are the sandy loam, silty clay loam, sandy clay, and weathered sandstone, which corresponds to an LTAR values of 0.35 to 0.15 gallons per day per square foot. The bedrock was encountered at approximately 5 feet in Test Pit No. 3. The conditions encountered in the Test Pit No. 3 will require a designed system.

Commercial Lots

Test pits (TP-5 to TP-14) were excavated in potential areas of absorptions fields and alternate locations on the commercial lots. Two of the proposed fields are located in the existing pond and drainage area in the western portion of Lot 19. Additional testing for these field will be required after site grading is completed. The other test locations should be evaluated after grading is completed to determine if test results from our investigation remain valid.

Areas of seasonal shallow groundwater and potentially seasonal shallow groundwater were encountered on site. A pond and earthen dam are located in the northeastern portion of the site. Water was not observed in the pond or drainages on-site. Due to the size of the lots and the proposed development, these areas can be avoided by construction on the residential lots. Structures should not block drainages. Septic fields should not be located in these areas due to the potential for periodic high groundwater conditions.

In summary, it is our opinion the site is suitable for individual and commercial on-site wastewater treatment systems (OWTS) and that contamination of surface and subsurface water resources should not occur provided the OWTS sites are evaluated and installed according to El Paso County and State Guidelines and properly maintained. Based on the testing performed as part of this investigation designed systems will be required for the majority of the lots. Septic Suitability Maps are presented in Figures 9 and 10. Individual soil testing is required on each lot prior to construction. Absorption fields must be located a minimum of 100 feet from any well, including those on adjacent properties. Absorption fields must also be located a minimum of 50 feet from any drainages, floodplains or ponded areas and 25 feet from dry gulches.

Areas of seasonal shallow groundwater and potentially seasonal shallow groundwater were encountered on site. A pond and earthen dam are located in the northeastern portion of the site. Water was not observed in the pond or drainages on-site. Due to the size of the lots and the proposed development, these areas can be avoided by construction on the residential lots. Structures should not block drainages. Septic fields should not be located in these areas due to the potential for periodic high groundwater conditions.

7.0 CLOSURE

It is our opinion that the existing geologic engineering and geologic conditions will impose some minor constraints on development and construction of the site. The majority of these conditions can be avoided by construction. Others can be mitigated through proper engineering design and construction practices. The proposed development and use are consistent with anticipated geologic and engineering geologic conditions.

It should be pointed out that because of the nature of data obtained by random sampling of such variable and non-homogeneous materials as soil and rock, it is important that we be informed of any differences observed between surface and subsurface conditions encountered in construction and those assumed in the body of this report. Individual investigations for building sites and septic systems will be required prior to construction. Construction and design personnel should be made familiar with the contents of this report. Reporting such discrepancies to Entech Engineering, Inc. soon after they are discovered would be greatly appreciated and could possibly help avoid construction and development problems.

This report has been prepared for Carl Turse, for application to the proposed project in accordance with generally accepted geologic soil and engineering practices. No other warranty expressed or implied is made.

We trust that this report has provided you with all the information that you required. Should you require additional information, please do not hesitate to contact Entech Engineering, Inc.

BIBLIOGRAPHY

- Bryant, Bruce; McGrew, Laura W, and Wobus, Reinhard A. 1981. Geologic Structure Map of the Denver 1° x 2° Quadrangle, North-Central Colorado. Sheet 2. U.S. Geologic Survey. Map I-1163.
- 2. Natural Resource Conservation *Service*, September 23, 2016. *Web Soil Survey*. United States Department Agriculture, http://websoilsurvey.sc.egov.usda.gov/App/HomePage.htm.
- 3. United States Department of Agriculture Soil Conservation Service. June 1981. Soil Survey of El Paso County Area, Colorado.
- 4. Thorson, Jon P. and Madole, Richard F., 2003. *Geologic Map of the Monument Quadrangle, El Paso County, Colorado*. Colorado Geological Survey. Open-File Report 02-40.
- 5. Trimble, Donald E. and Machette, Michael N. 1979. Geologic Map of the Colorado Springs-Castle Rock Area, Front Range Urban Corridor, Colorado. USGS, Map I-857-F.
- 6. Bryant, Bruce; McGrew, Laura W. and Wobus, Reinhard A. 1981. *Geologic Map of the Denver 1º x 2º Quadrangle, North-Central Colorado*. U.S. Geologic Survey. Map 1-1163.
- 7. Federal Emergency Management Agency. December 7, 2018. Flood Insurance Rate Maps for the City of Colorado Springs, Colorado. Map Number 08041CO285G.
- 8. El Paso County Planning Development. December 1995. El Paso County Aggregate Resource Evaluation Maps.
- 9. Schwochow, S.D.; Shroba, R.R. and Wicklein, P.C. 1974. Atlas of Sand, Gravel, and Quarry Aggregate Resources, Colorado Front Range Counties. Colorado Geological Survey. Special Publication 5-B.
- 10. Keller, John W.; TerBest, Harry and Garrison, Rachel E. 2003. Evaluation of Mineral and Mineral Fuel Potential of El Paso County State Mineral Lands Administered by the Colorado State Land Board. Colorado Geological Survey. Open-File Report 03-07.



TABLE 1

SUMMARY OF LABORATORY TEST RESULTS

CLIENT CARL TURSE

ROLLIN RIDGE ESTATES	170837	
PROJECT	JOB NO.	

			_			_													
SOIL DESCRIPTION	CLAY, VERY SANDY	CLAY, SANDY	SILTY CLAY LOAM	SILTY CLAY LOAM	SILTY CLAY LOAM	CLAY, VERY SANDY	CLAY, VERY SANDY	CLAY, SANDY	SAND, CLAYEY	SANDY LOAM	SAND, SLIGHTLY SILTY	SAND, VERY CLAYEY	SAND, SILTY	SANDSTONE, SLIGHTLY SILTY	SANDSTONE, CLAYEY	SANDSTONE, SLIGHTLY SILTY	SANDSTONE, SILTY	SANDSTONE, SILTY	SANDSTONE, SILTY
UNIFIED	כר	บ	ML	ML	ML	CI	CF	ರ	SC	SC	SM-SW	SC	SM	SM-SW	SC	SM-SW	SM	SM	SM
SWELL/ CONSOL (%)																			
FHA SWELL (PSF)		430							556										
SULFATE (WT %)																			
PLASTIC INDEX (%)																			
LIQUID LIMIT (%)																			
PASSING NO. 200 SIEVE (%)	55.0	71.7	56.0	62.2	63.2	58.2	54.5	64.5	34.6	38.9	6.0	41.7	26.4	11.9	13.9	8.8	14.3	12.2	25.4
DRY DENSITY (PCF)																			
WATER (%)											_								
DEPTH (FT)	2-3	2-3	2-6	2-3	2-3	2-3	8-9	3-4	5	5-6	6-8	3-8	4-6	15	5-6	6-8	6-8	5-6	1.5-8
TEST BORING NO.	1	TP-1	TP-1	TP-2	TP-3	TP-5	TP-10	TP-14	2	TP-4	TP-5	TP-6	TP-11	2	TP-3	TP-7	TP-8	TP-12	TP-13
SOIL	1	1	1	1	1	1	1	1	2	2	2	2	2	3	3	9	3	3	3

Table 2: Summary of Percolation Test and Tactile Test Pit Results


Percolation	Percolation	Depth	Depth to
Test	Rate	to	Groundwater (ft.)
No.	(min/in)	Bedrock (ft.)	
1	67*	N/A	N/A
2	76*	12	N/A

Test	USDA Soil	LTAR	Depth	Depth to		
Pit	Туре	Value	to Seasonally			
No.	Я		Bedrock (ft.)	Occurring		
				Groundwater (ft.)		
1	3	0.35	N/A	N/A		
2	3	0.35	N/A	N/A		
3	4A*	0.15	5**	N/A		
4	2A	0.50	N/A	N/A		
5	3A*	0.30	6**	6		
6	3A*	0.30	8**	8		
7	3A*	0.30	5**	6.5		
8	4*	0.20	6**	6		
9	4A*	0.15	6**	6		
10	4A*	0.15	6**	6		
11	3A*	0.30	5**	5		
12	3A*	0.30	5**	5		
13	3A*	0.30	1**	N/A		
14	3A*	0.30	5**	5		
0 131	***					

^{*-} Conditions that will require an engineered OWTS

**- Sandstone highly weathered to formational (Dawson Formation)




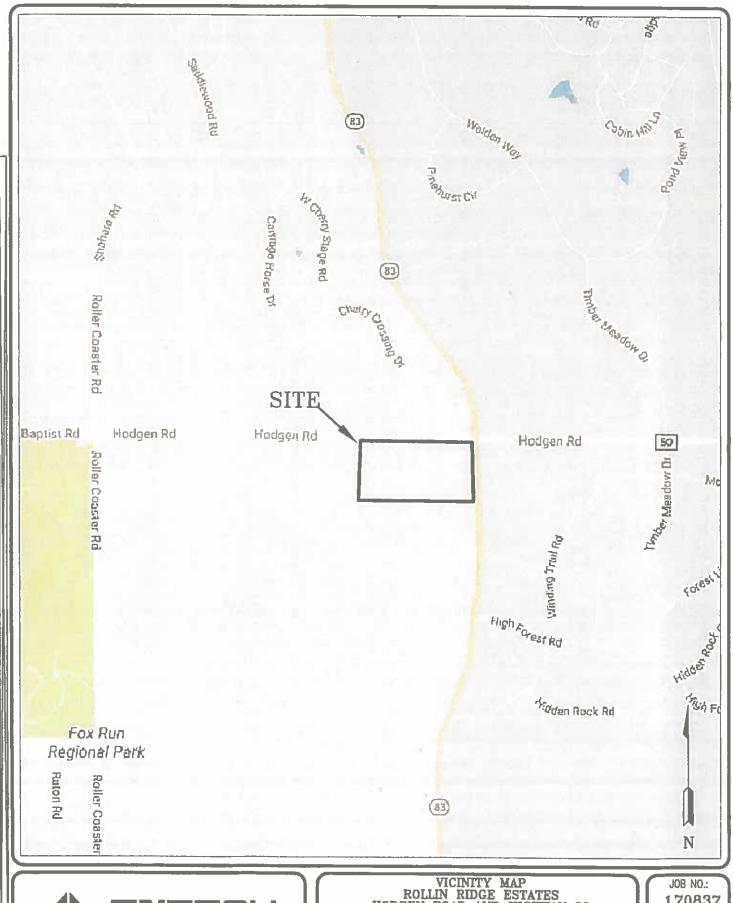



VICINITY MAP
ROLLIN RIDGE ESTATES
HODGEN ROAD AND HIGHWAY 83
EL PASO COUNTY, CO.
FOR: CARL TURSE DATE:

DRAWN: LLL DATE: 7/19/17 CHECKED: 170837 FIG NO.: 1

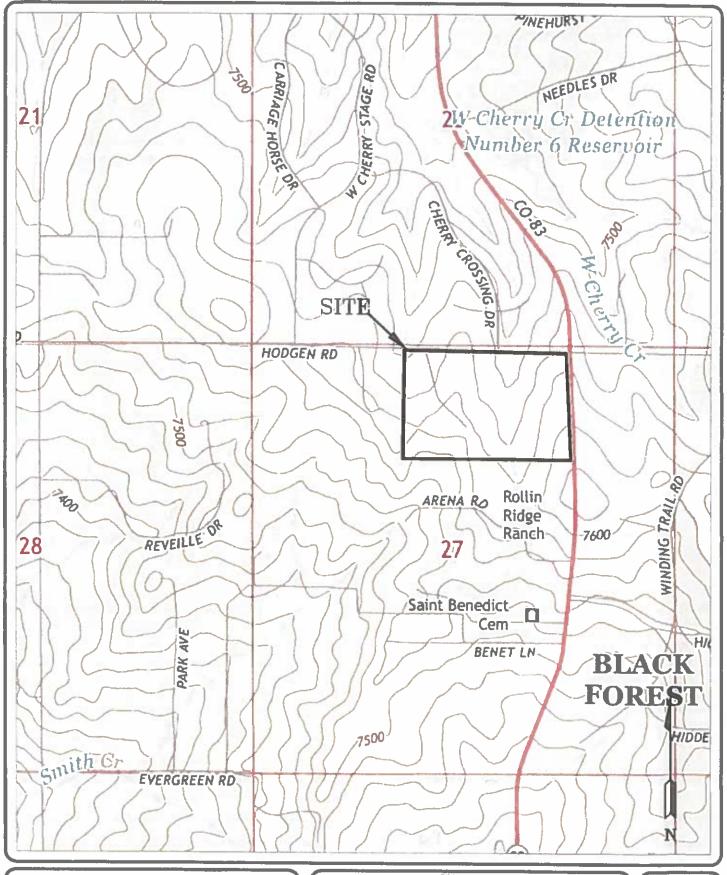




USGS MAP
ROLLIN RIDGE ESTATES
HODGEN ROAD AND HIGHWAY 83
EL PASO COUNTY, CO.
FOR: CARL TURSE

DRAWN: DATE: CHECKED: DATE:

JOB NO.: 170837 FIG NO.:

2

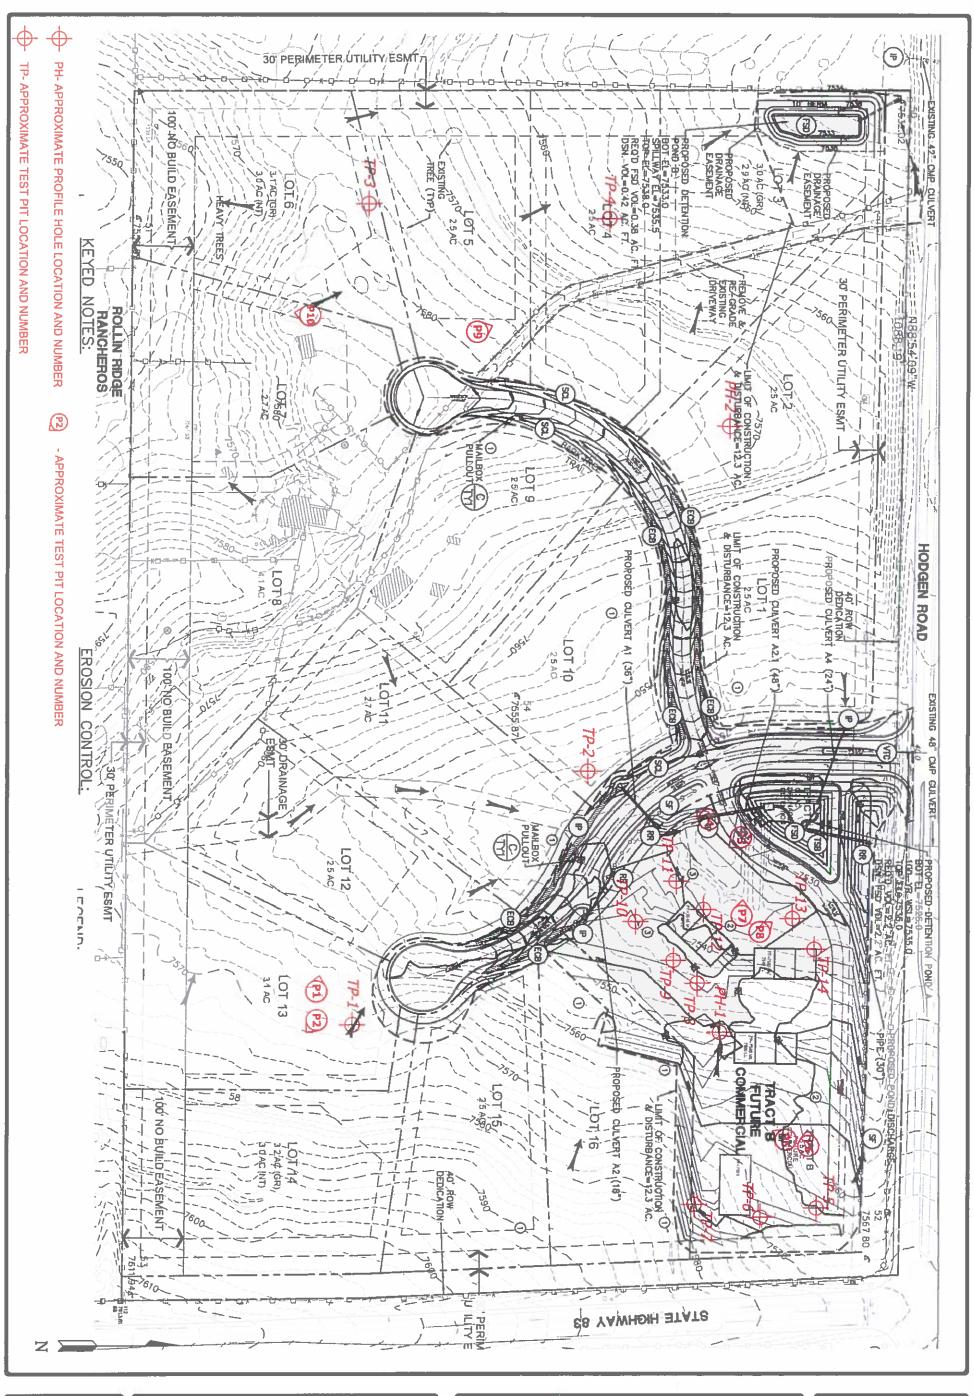


AS SHOWN
AS

DEVELOPMENT PLAN/TEST BORING AND
TEST PIT LOCATION MAP
ROLLIN RIDGE ESTATES
HODGEN ROAD AND HIGHWAY 83
EL PASO COUNTY, CO.
FOR: CARL TURSE





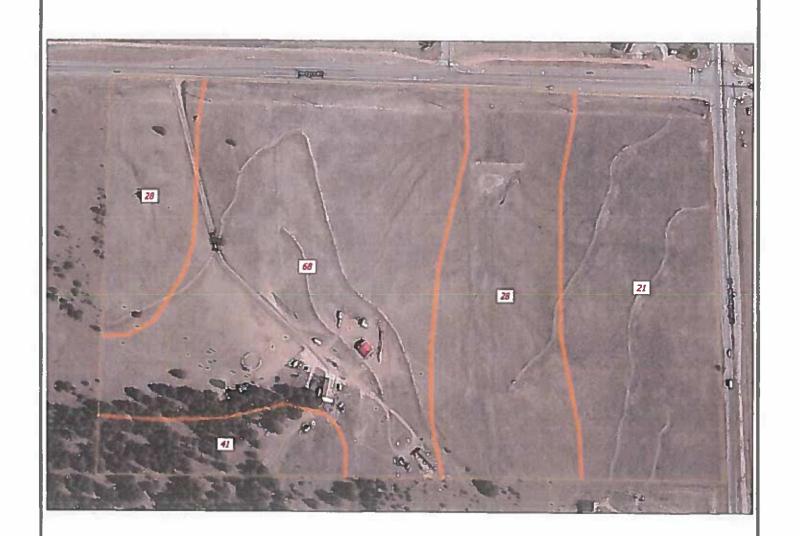






SCS MAP
ROLLIN RIDGE ESTATES
HODGEN ROAD AND HIGHWAY 83
EL PASO COUNTY, CO.
FOR: CARL TURSE

DRAWN: DATE: CHECKED: DATE:

JOB NO.: 170837

FIG NO.:

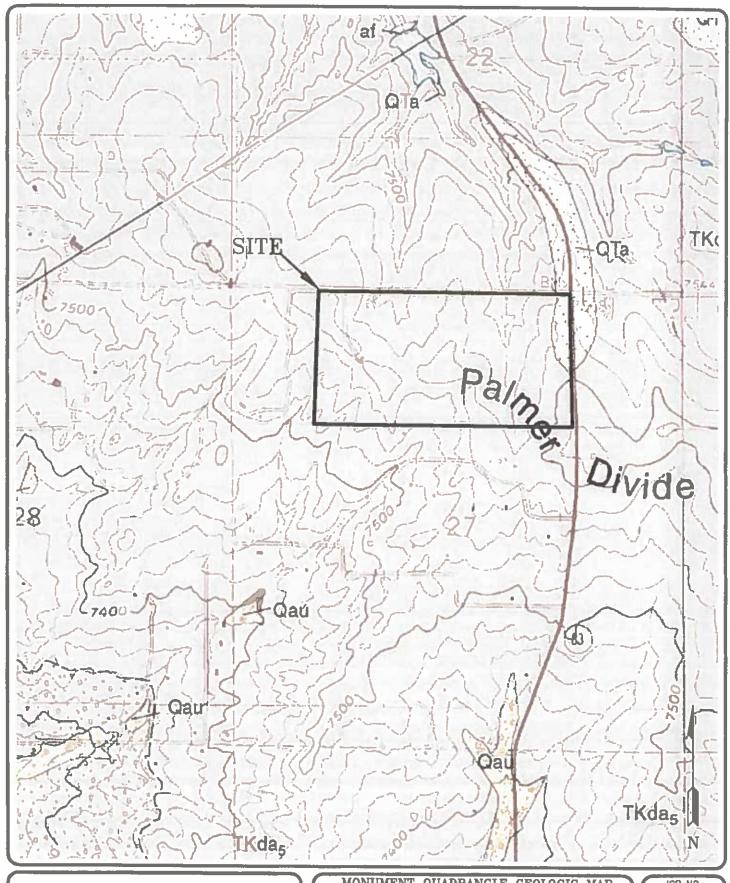




MONUMENT QUADRANGLE GEOLOGIC MAP ROLLIN RIDGE ESTATES HODGEN ROAD AND HIGHWAY B3 EL PASO COUNTY, CO. FOR: CARL TURSE

DRAWN: DATE: CHECKED: DATE:
LLL 7/19/17

JOB NO.: 170837 FIG NO.:

5

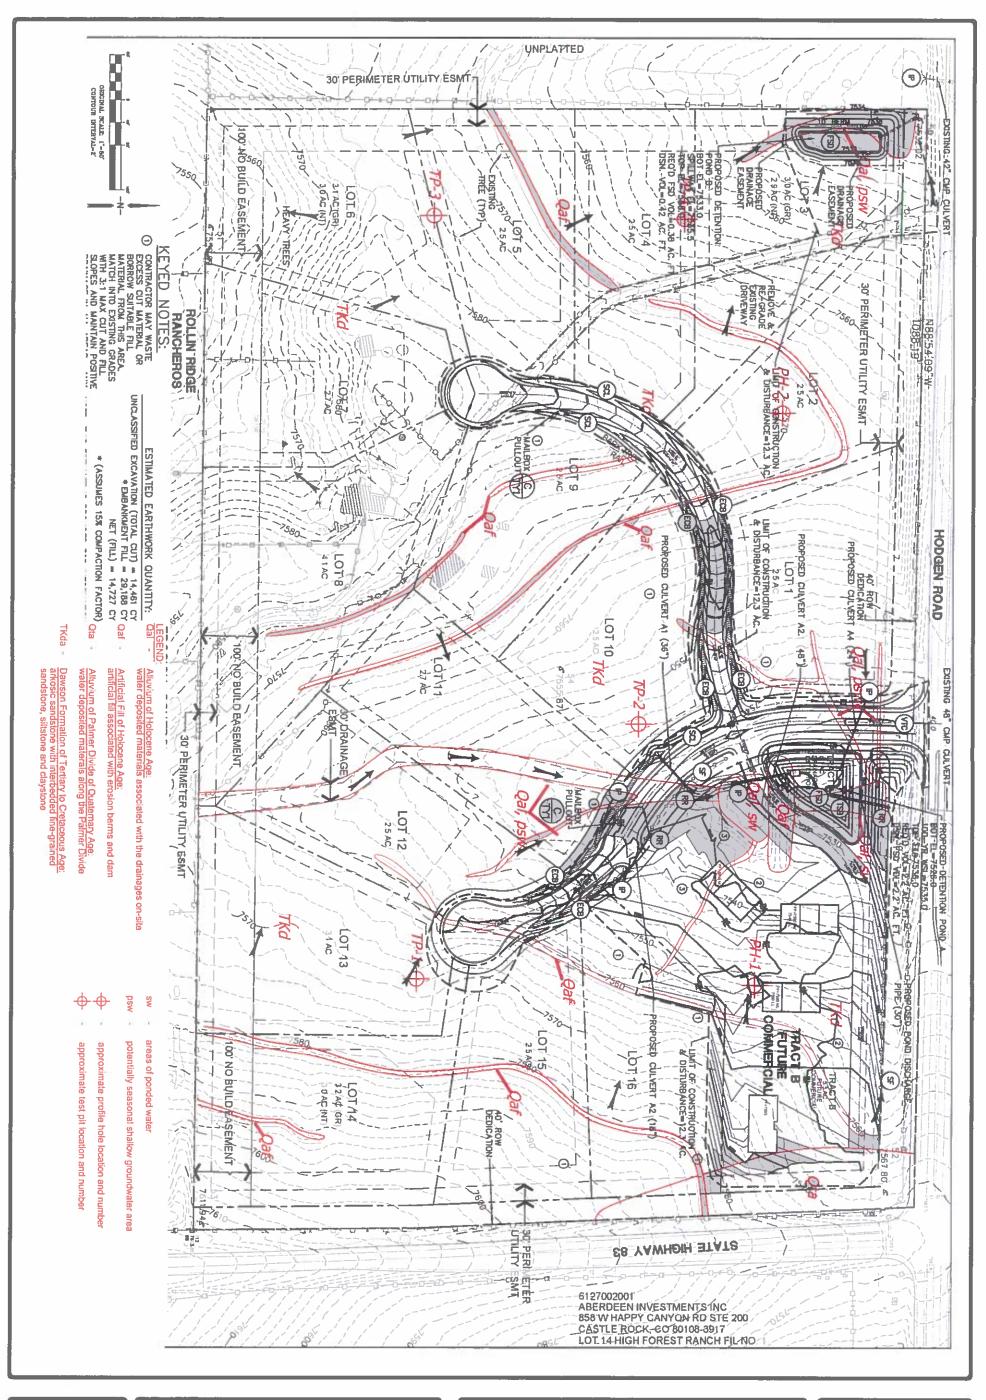



GEOLOGY/ENGINEERING GEOLOGY MAP ROLLIN RIDGE ESTATES HODGEN ROAD AND HIGHWAY 83 EL PASO COUNTY, CO. FOR: CARL TURSE





LEGEND

SPECIAL FLOOD HAZARD AREAS SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD

The 1% annual chance floud (100-year flood), also known as the base flood, is the floud that has a 1% chance of being equaled or exceeded in any given year. The Special Flood Hazard Area is the area subject or flooding by the 1% annual chance flood. Areas of Special Flore Hazard Include Zones A, AE, AH, AO, AE, AND, Carl VE. The Rain Floret Devalve, is the wider-surface elevation of the 1% annual chance flored.

A BNOZ

No Base Floral Elevations determined,

Base Flood Devations determined.

ZONE AE

Flood depths of 3 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities Special Flood Hazard Area formerly protected from the 1% annual chance flood by a flood control system that was subsequently decentified. Zone Alt indicates that the former flood control system is being reasoned to provide protection from the 1% annual chance or one time flows. Flood depths of 1 to 3 feet (usually areas of powding); Base Flood Elevations determined.

ZONE AR

ZONE AO ZONE AH

Area to be protected from 1% annual chance flood by a Federal fload protection system under construction; no Sixer Flood Bevations determined Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.

The floodway is the channel of a stream plus any adjacent floodplain areas that must be upx free of encouchment so that the 1% annual chance flood can be carried without ubstantial increases in flood heights. FLOODWAY AREAS IN ZONE AS Contal finns sone with whichy hazard twave actions; Race Hood Elevations determined.

OTHER FLOOD AREAS

X BNOZ

Areas of 0.2% annual chance flood; arros of 1% annual chance lional with average depths of less than 1 innt or with dosinage areas less than 1 square mile; and weap protected by levees from 1% annual chance

COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS Areas in which flood hazards are undetermined, but possible. Areas determined to be nutrible the 0.2% aroual chance Bendplain

X BNOX

ZONE D

and OPAs are normally located within in educant to Episoid Ricold Hazerd Areas 0.2% annual chance fluodplain boundary 1% annual chance flexiblish boundary

Zone D boundary

OTHERWISE PROTECTED AREAS (OPAs)

Base Flood Elevation value where uniform within asmost clevation in feet* Boundary dividing Special Flood Hazard Area Zones and boundary dividing Special Flood Hazard Areas of dillerent Base Flood Elevations, flood depths or flood velocities CBRS and OPA boundary Rase Flood Elevation line and value; elevation in feets

-513-

Referenced to the regional Geodesic Vestical Datum of 1929 Ø

(E) -----(E) -CF-22-21 *. CF-22-75-

Geographic coordinates referenced to the North American Datum of 1983 (NAD 83), Western Hermsphere 1000-meter Universal Transverse Atercator grid tick values, zone 4 Bench mark (see explanation in Notes to Usen section of this FIRM panel) 5000-foot gid tick values: / lawali State Mane contdinate system, zono 3 (FIPSTONE 5103), Transverso Mercatty projection

630000 FT 4276mmu

MAP REPOSITORY

Refer to listing of Map Repositories on Map Index

Coastal Male marker

FLOOD INSURANCE HATE MAP
Nowember 20, 2000

EFFECTIVE DATEISIOF REVISIONS) TO THE PANEL
September 30, 2014 – to change Special Flood Hazard Area, to update map format, in
reflect revised shareline and to incorporate previously issued Letters of Map Revision.

- i - 104 770 39 068 Degree




FLOODPLAIN MAP ROLLIN RIDGE ESTATES HODGEN ROAD AND HIGHWAY 83 EL PASO COUNTY, CO. FOR: CARL TURSE



505 ELKTON DRIVE COLORADO SPRINGS, CO. 80907 (719) 531-5599

 	_			
				ľ
	Ι.			l
				ŀ
				L
-		-		

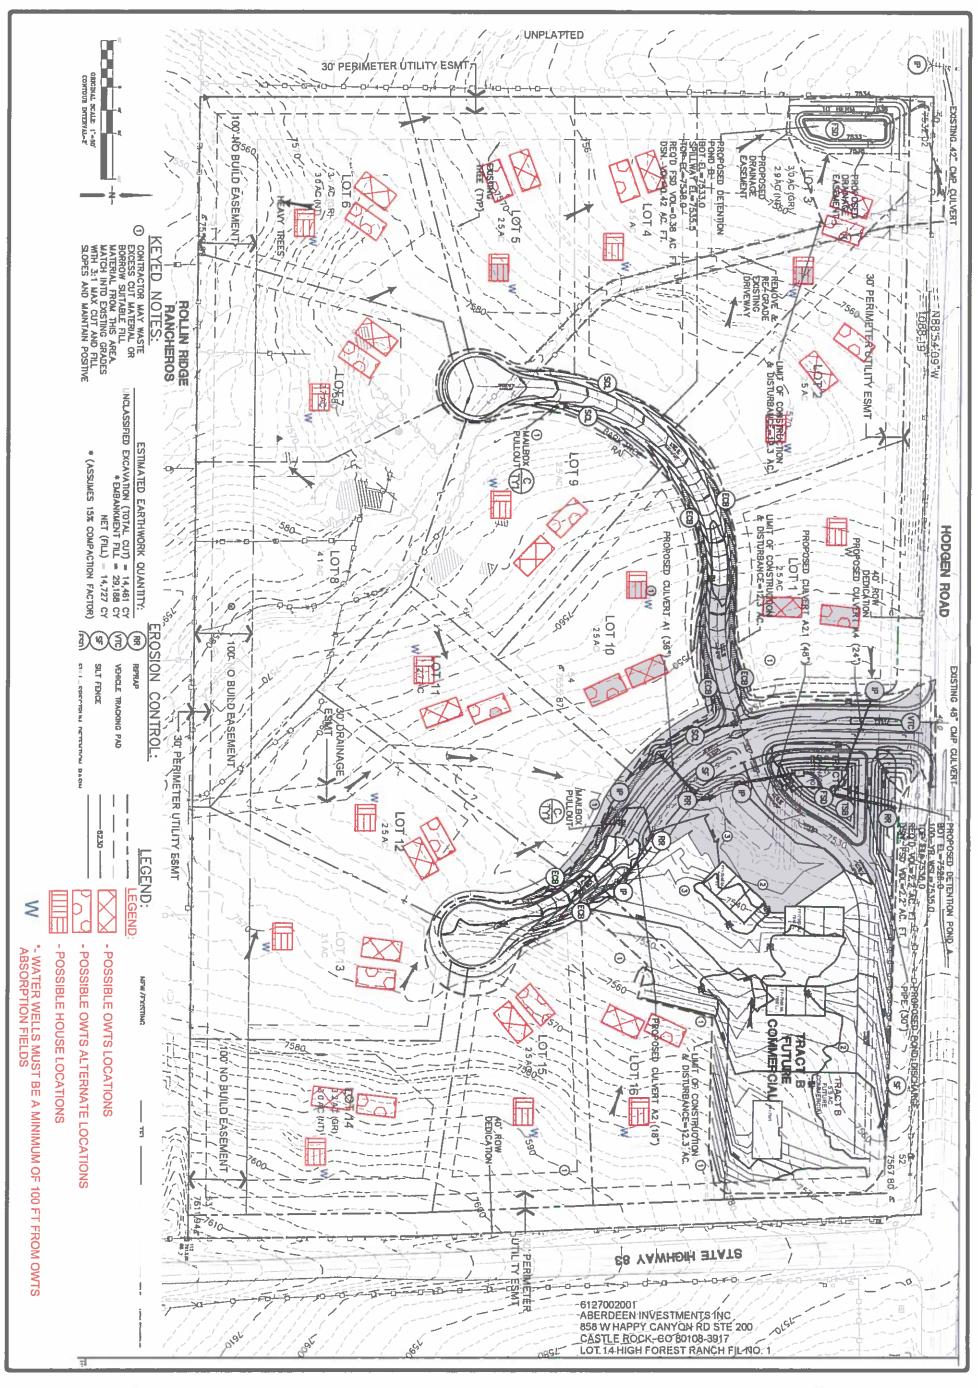




SEPTIC SUITABILITY MAP ROLLIN RIDGE ESTATES HODGEN ROAD AND HIGHWAY 83 EL PASO COUNTY, CO. FOR: CARL TURSE





APPENDIX A: Site Photographs





Looking west from the southeastern portion of the site.

June 27, 2017






Looking southeast from Test Pit No. 1 in the southeastern portion of the site.

June 27, 2017





Looking southeast from the pond in the northeastern portion of the site.


June 27, 2017





Looking southwest from the northern portion of the site.

June 27, 2017

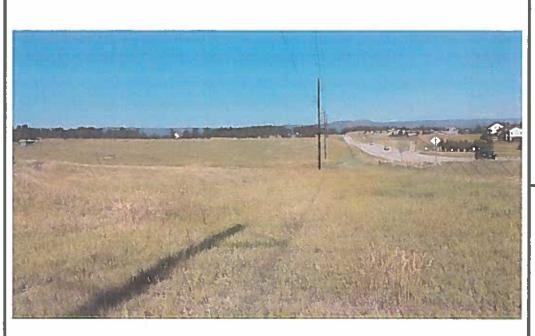



Looking west from the northeast corner of the site.

July 10, 2017






Looking southwest from the northeast corner of the site.

July 10, 2017

Job No. 170837

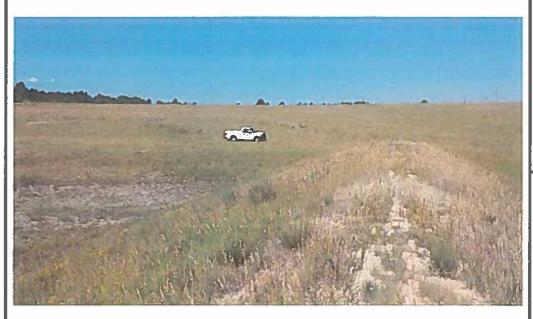




Looking west along the dam located in the northeastern portion of the site.

July 10, 2017





Looking northwest from the northeastern portion of the site.

July 10, 2017






Looking northwest from the western portion of the site.

July 10, 2017





Looking south from the southwestern portion of the site.

July 10, 2017

APPENDIX B: Test Boring Logs from the Profile Holes and Test Pit Logs

PROFILE HOLE NO. PROFILE HOLE NO. DATE DRILLED 7/10/2017 DATE DRILLED 7/10/2017 Job# 170837 **CLIENT** CARL TURSE LOCATION **ROLLIN RIDGE ESTATES** REMARKS REMARKS Watercontent % Blows per foot foot Watercontent Blows per Depth (ft) Soil Type Samples Soil Type Samples Symbol Symbol Depth (DRY TO 10', 7/10/17 DRY TO 9.5', 7/11/17 CAVED TO 10', 7/11/17, DRY CLAY, SANDY, TAN, FIRM, CLAY, SANDY, TAN, SOFT, MOIST MOIST 10 6.0 1 5 5.0 1 SAND, CLAYEY, FINE TO 12 4.7 COARSE GRAINED, TAN, DENSE, 30 2.9 2 MOIST 10 15 10.6 1 10 47 8.1 2 SANDSTONE, SLIGHTLY SILTY, FINE TO COARSE GRAINED, TAN, 15 VERY DENSE TO DENSE. 15 50 6.8 3 MOIST 20 20 32* 12.8 3 - WEATHERED ZONE



	PROF	ILE HOLE LOG		
DRAWN:	DATE.	CHECKED:	DATE: 7/19/17	

JOB NO.:
170837
FIG NO.:

B-1

TEST PIT NO. TEST PIT NO. 2 DATE EXCAVATED 6/27/2017 DATE EXCAVATED 6/27/2017 Job# 170837 CLIENT **CARL TURSE** LOCATION **ROLLIN RIDGE ESTATES** REMARKS REMARKS Soil Structure Shape Soil Structure Grade Soil Structure Shape Soil Structure Grade ω USDA Soil Type യ USDA Soil Type Depth (ft) Depth (ft) Samples Samples Symbol Symbol topsoil, silty clay loam, brown m topsoil, silty clay loam, brown gr gr m silty clay loam, brown gr m silty clay loam, light brown 3 gг m 2 2 3 sandy loam, fine to medium 2 gr m grained, tan 5 6 8 8 9 9

Soil Structure Shape

granular - gr platy - pl blocky - bl prismatic - pr single grain - sg massive - ma



	TEST P	IT LOG	
DRAWN:	DATE:	CHECKED:	DATE: 7/19/17

JOB NO: 170837
FIG NO: 3-2

TEST PIT NO. TEST PIT NO. 3 DATE EXCAVATED 6/27/2017 DATE EXCAVATED 6/27/2017 Job# 170837 CLIENT **CARL TURSE** LOCATION **ROLLIN RIDGE ESTATES** REMARKS REMARKS Soil Structure Shape Soil Structure Grade Soil Structure Shape Soil Structure Grade **USDA Soil Type** N USDA Soil Type Depth (ft) Depth (ft) Samples Samples Symbol Symbol topsoil, silty clay loam, brown m topsoil, sandy loam. Brown gr gr silty clay loam, orange-brown gr m sandy loam, fine to medium 2 gr m 2 grained, orange-brown 2 3 3 sandy loam, fine to medium W 2A gr weathered clayey sandstone, 5 ma 4A grained, orange-brown fine to coarse grained, tan 6 8 9 9

Soil Structure Shape

granular - gr platy - pl blocky - bl prismatic - pr single grain - sg

massive - ma



	TEST PI	T LOG	
DRAWN:	DATE:	CHECKED:	-DATE: 7/19/17

170837 FIG NO: TEST PIT NO. 5
DATE EXCAVATED 9/18/2017
Job # 170837

TEST PIT NO. 6
DATE EXCAVATED 9/18/2017
CLIENT CARL TURSE

						LOCATION ROLLIN	RIDGE	EST	ATE	ES		
REMARKS	Depth (ft)	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type	REMARKS	Depth (ft)	Symbol	ples	Soil Structure Shape	Soil Structure Grade	N USDA Soil Type
topsoil, sandy loam, brown	ذٰلہ ا	4	gr	m	2	topsoil, sandy loam, brown	1 -	4		gr	W	2A
sandy loam, fine to coarse grained, light brown weathered silty sandstone, fine to coarse grained, tan *signs of seasonally occurring	3 4 5 6 7		gr	m	2 3A	sandy loam, fine to coarse grained, light brown	3 - 4 - 5 - 6 - 7 -			gr	w	2A
groundwater at 6'	9 1					weathered silty sandstone, fine to coarse grained, buff *signs of seasonally occurring groundwater at 8'	9 -	·/·	ŗ	ma		ЗА

Soil Structure Shape

granular - gr platy - pl blocky - bl prismatic - pr single grain - sg massive - ma Soil Structure Grade

weak - w moderate - m strong - s loose - I



	TEST	PIT LOG	
DRAWN:	DATE:	CHECKED:	DATE: 10/24/17

170837 FIG NO: TEST PIT NO. 7
DATE EXCAVATED 9/18/2017
Job # 170837

TEST PIT NO. 8
DATE EXCAVATED 9/18/2017
CLIENT CARL TURSE

		LOCATION ROLLIN RIDGE ESTATES											
REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type	REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type
topsoil, sandy loam, brown		4		gr	m	2	topsoil, sandy clay, brown		3		gr	m	4
sandy loam, fine to coarse grained, light brown	2 3			gr	m	2	sandy clay, brown	2 - 3 -			gr	m	4
weathered silty sandstone, fine to coarse grained, tan *signs of seasonally occurring groundwater at 6.5'	5 6 7 8 9 10 10 10 10 10 10 10 10 10 10 10 10 10			ma		ЗА	weathered silty sandstone, fine to coarse grained, tan *signs of seasonally occurring groundwater at 6'	4 _ 5 _ 6 _ 7 _ 8 _ 9 _ 10			ma		за

Soil Structure Shape

granular - gr platy - pl blocky - bl prismatic - pr single grain - sg massive - ma Soil Structure Grade

weak - w moderate - m strong - s loose - I

()	ENTECH ENGINEERING, INC.
	505 ELKTON DRIVE COLORADO SPRINGS, COLORADO 80907

TEST PIT LOG							
DRAWN:	DATE:	CHECKED:	DATE: /0/2 4//7				

JOB NO: 170837

TEST PIT NO. 9
DATE EXCAVATED 9/18/2017
Job # 170837

TEST PIT NO. 10
DATE EXCAVATED 9/18/2017
CLIENT CARL TURSE

							LOCATION ROLLIN I	RIDGE	EES1	AT	ES		
REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type	REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type
topsoil, sandy clay loam,	.			gr	m	3	topsoil, sandy clay loam,	_	W)		gr	m	3
brown sandy clay loam, light brown	1 -	1.5		gr	m	3	brown sandy clay loam, brown	1 -			a.		
weathered very clayey sandstone, tan *signs of seasonally occurring groundwater at 6'	3 4 5 6 7 8 9			ma			weathered very clayey sandstone, tan 'signs of seasonally occurring groundwater at 6'	2 - 3 - 4 - 5 - 6 - 7 - 8 - 9			gr ma	m	4A
	10	-						10					

Soil Structure Shape granular - gr platy - pl blocky - bl

prismatic - pr single grain - sg massive - ma Soil Structure Grade

weak - w moderate - m strong - s loose - I



TEST PIT LOG								
DRAWN:	DATE:	CHECKED:	DATE: /0/24//7					

JOB NO.: /70837 FIG NO.: B-6 TEST PIT NO. 11 DATE EXCAVATED 9/18/2017 Job # 170837 TEST PIT NO. 12
DATE EXCAVATED 9/18/2017
CLIENT CARL TURSE

		LOCATION ROLLIN RIDGE ESTATES										
REMARKS	Depth (ft) Svmbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type	REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	N USDA Soil Type
topsoil, sandy loam, brown]	gr	m	2	topsoil, sandy loam, brown	_	4.		gr	m	2
sandy loam, fine to coarse grained, light brown	2		gr	m	2	sandy loam, fine to coarse grained, light brown	2 -			gr	m	2
weathered silty sandstone, fine to coarse grained, tan *signs of seasonally occurring groundwater at 5'	3 4 5 6 7 8	\ - 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \	ma		3A	weathered silty sandstone, fine to coarse grained, tan *signs of seasonally occurring groundwater at 5'	3 - 4 - 5 - 6 - 7 - 8 - 9 - 10			ma		ЗА

Soil Structure Shape granular - gr platy - pl blocky - bl prismatic - pr single grain - sg massive - ma

Soil Structure Grade

weak - w moderate - m strong - s loose - I



TEST PIT LOG								
DRAWN	DATE:	CHECKED:	DATE: /0/24/17					

TEST PIT NO. 13
DATE EXCAVATED 9/18/2017
Job # 170837

TEST PIT NO. 14
DATE EXCAVATED 9/18/2017
CLIENT CARL TURSE

		LOCATION ROLLIN RIDGE ESTATES											
REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type	REMARKS	Depth (ft)	Symbol	Samples	Soil Structure Shape	Soil Structure Grade	USDA Soil Type
topsoil, sandy loam, brown	1 -	4		gr	W	2A	topsoil, sandy clay, brown		4		gr	m	4
weathered to formational silty sandstone, fine to coarse grained, tan	1 2 3 4 5 6 7 8 9			ma		за	sandy clay, brown weathered to formational silty sandstone, fine to coarse grained, tan *signs of seasonally occurring groundwater at 5'	1 2 3 4 1 3 6 7 8 9			gr	m	3A
	10							10					

Soil Structure Shape

granular - gr platy - pl blocky - bl prismatic - pr single grain - sg massive - ma Soil Structure Grade


weak - w moderate - m strong - s loose - I



TEST PIT LOG								
DRAWN:	DATE:	CHECKED:	DATE: 10/14/17	_				

APPENDIX C: Laboratory Test Results

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE
SOIL TYPE #	1	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	1	JOB NO.	170837
DEPTH (FT)	2-3	TEST BY	BL

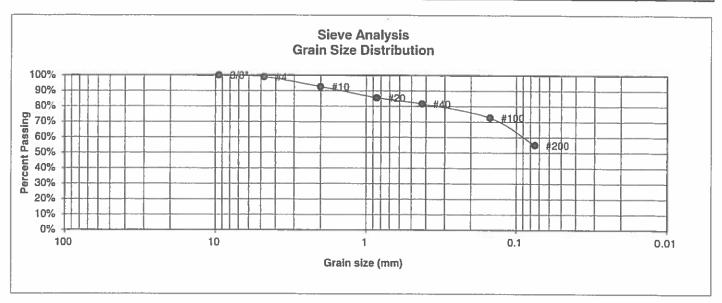


U.S.	Percent	Atterberg
Sieve #	<u>Finer</u>	<u>Limits</u>
3"		Plastic Limit
1 1/2"		Liquid Limit
3/4"		Plastic Index
1/2"		
3/8"	100.0%	
4	98.9%	Swell
10	92.7%	Moisture at start
20	85.5%	Moisture at finish
40	81.6%	Moisture increase
100	72.7%	Initial dry density (pcf)
200	55.0%	Swell (psf)



	LABORATORY TEST RESULTS								
DRAWN:	DATE:	CHECKED:	DATE:						
		1 66	10/25/17						

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE
SOIL TYPE #	1	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-1	JOB NO.	170837
DEPTH (FT)	2-3	TEST BY	BL

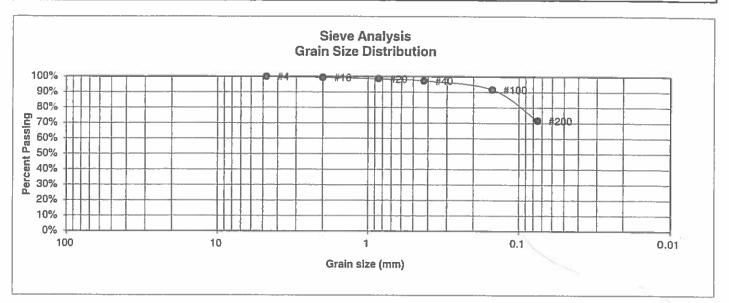


U.S.	Percent	Atterberg
Sieve #	<u>Finer</u>	<u>Limits</u>
3"		Plastic Limit
1 1/2"		Liquid Limit
3/4"		Plastic Index
1/2"		
3/8"		
4	100.0%	<u>Swell</u>
10	99.4%	Moisture at start 8.4%
20	98.6%	Moisture at finish 20.9%
40	97.3%	Moisture increase 12.6%
100	91.7%	Initial dry density (pcf) 99
200	71.7%	Swell (psf) 430

4	ENTECH ENGINEERING, INC.
30	505 ELKTON DRIVE
	COLORADO SPRINGS, COLORADO 80907

	LABOF RESUL	RATORY TEST .TS	
DRAWN:	DATE:	CHECKED:	DATE:

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE
SOIL TYPE #	I	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-1	JOB NO.	170837
DEPTH (FT)	5-6	TEST BY	BL

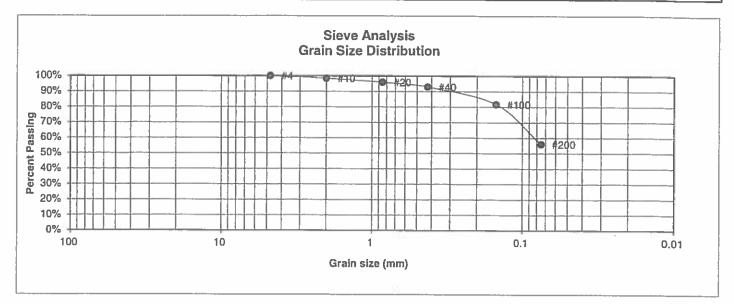


U.S.	Percent	Atterberg
Sieve #	<u>Finer</u>	<u>Limits</u>
3"		Plastic Limit
1 1/2"		Liquid Limit
3/4"		Plastic Index
1/2"		
3/8"		
4	100.0%	<u>Swell</u>
10	98.5%	Moisture at start
20	95.9%	Moisture at finish
40	93.0%	Moisture increase
100	81.8%	Initial dry density (pcf)
200	56.0%	Swell (psf)



	LABOR RESUL	ATORY TEST TS	,
DRAWN:	DATE	CHECKED:	DATE:
		1 / / / /	10/15/17

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE
SOIL TYPE #	1	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-2	JOB NO.	170837
DEPTH (FT)	2-3	TEST BY	BL

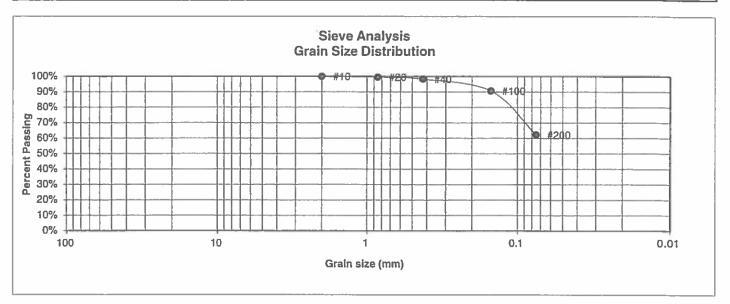


U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2" 3/8"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
4		<u>Swell</u>
10	100.0%	Moisture at start
20	99.6%	Moisture at finish
40	98.3%	Moisture increase
100 200	90.7% 62.2%	Initial dry density (pcf) Swell (psf)



LABORATORY TEST RESULTS			
DRAWN:	DATE	CHECKED:	DATE:
			10/25/17

FIGNO.

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE	ı
SOIL TYPE #	1	PROJECT	ROLLIN RIDGE ESTATES	ı
TEST BORING #	TP-3	JOB NO.	170837	
DEPTH (FT)	2-3	TEST BY	BL	

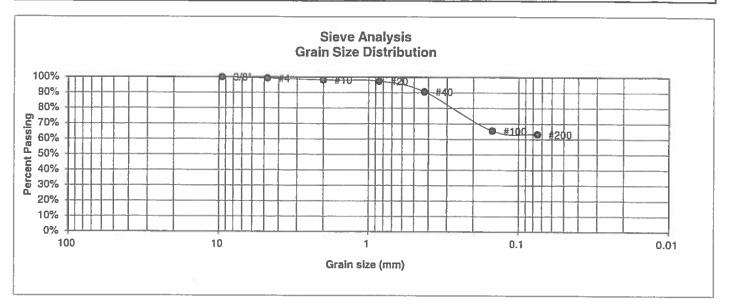

U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
3/8"	100.0%	
4	99.3%	Swell
10	98.3%	Moisture at start
20	97.4%	Moisture at finish
40	90.6%	Moisture increase
100	65.4%	Initial dry density (pcf)
200	63.2%	Swell (psf)




LABORATORY TEST RESULTS			
DRAWN:	DATE:	CHECKED:	DATE:

JOB NO.: 170837 FIG NO.:

L-5

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE
SOIL TYPE #	1	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-5	JOB NO.	170837
DEPTH (FT)	2-3	TEST BY	BL

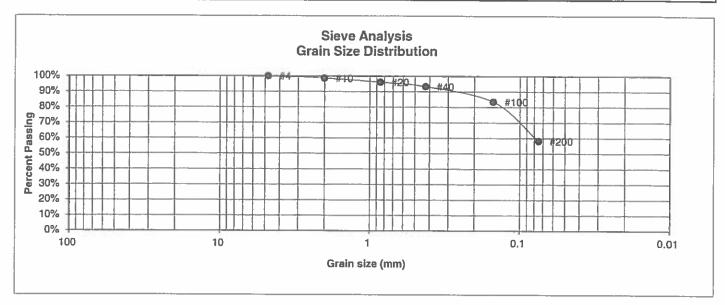


U.S. Sieve # 3" 1 1/2" 3/4" 1/2" 3/8"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
4	100.0%	<u>Swell</u>
10	98.7%	Moisture at start
20	96.1%	Moisture at finish
40	93.3%	Moisture increase
100 200	83.6% 58.2%	Initial dry density (pcf) Swell (psf)



	LABOR RESUL	ATORY TEST	
DRAWN:	DATE	CHECKED:	DATE: /0/25//7

JOB NO.: 170837 FIG NO.:

UNIFIED CLASSIFICATION	CL	CLIENT	CARL TURSE
SOIL TYPE #	1	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-10	JOB NO.	170837
DEPTH (FT)	6-8	TEST BY	BL

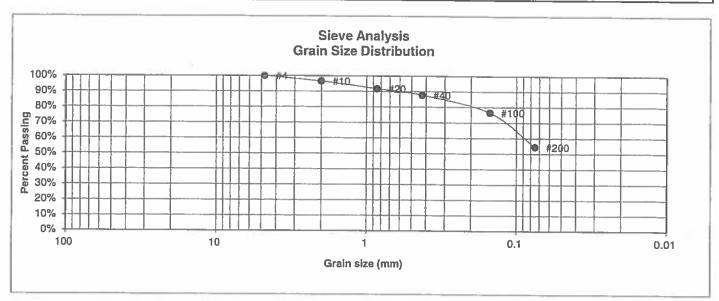

U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2" 3/8"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
4	100.0%	<u>Swell</u>
10	96.5%	Moisture at start
20	91.7%	Moisture at finish
40	87.7%	Moisture increase
100	76.5%	Initial dry density (pcf)
200	54.5%	Swell (psf)

DRAWN:




RESULTS	ORY TEST	
DATE:	CHECKED:	DATE:

JOB NO.: 170837

FIG NO.:

1-7

UNIFIED CLASSIFICATION CL CLIENT CARL TURSE SOIL TYPE # 1 **PROJECT ROLLIN RIDGE ESTATES TEST BORING #** TP-14 JOB NO. 170837 DEPTH (FT) 3-4 **TEST BY** BL

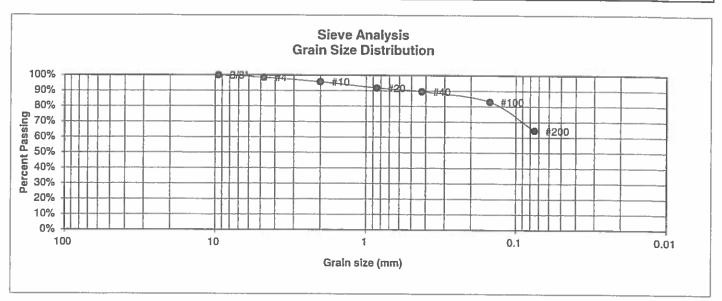


U.S. Sieve #	Percent <u>Finer</u>	Atterberg Limits
3" 1 1/2"		Plastic Limit
3/4"		Liquid Limit Plastic Index
1/2"		
3/8"	100.0%	
4	98.5%	<u>Swell</u>
10	95.7%	Moisture at start
20	91.8%	Moisture at finish
40	89.6%	Moisture increase
100	83.0%	Initial dry density (pcf)
200	64.5%	Swell (psf)



	LABOF RESUL	ATORY TEST	•
DRAWN:	DATE	CHECKED:	DATE:

JOB NO.: 170837

UNIFIED CLASSIFICATION	SC	CLIENT	CARL TURSE
SOIL TYPE #	2	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	2	JOB NO.	170837
DEPTH (FT)	5	TEST BY	BL

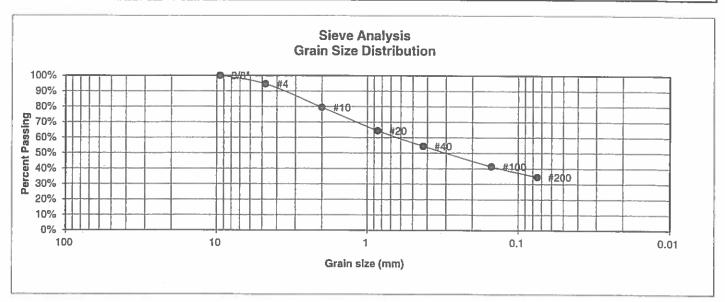


U.S.	Percent	Atterberg	
Sieve #	<u>Finer</u>	<u>Limits</u>	
3"		Plastic Limit	
1 1/2"		Liquid Limit	
3/4"		Plastic Index	
1/2"			
3/8"	100.0%		
4	94.7%	Swell	
10	79.5%	Moisture at start	4.2%
20	64.4%	Moisture at finish	9.5%
40	54.5%	Moisture increase	5.3%
100	41.4%	Initial dry density (pcf)	211
200	34.6%	Swell (psf)	556



		LABORATORY TEST RESULTS		
DRAWN:	DATE:	CHECKED:	DATE:	
		LLL	10/25/17	

UNIFIED CLASSIFICATION	SC	CLIENT	CARL TURSE
SOIL TYPE #	2	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-4	JOB NO.	170837
DEPTH (FT)	5-6	TEST BY	BL

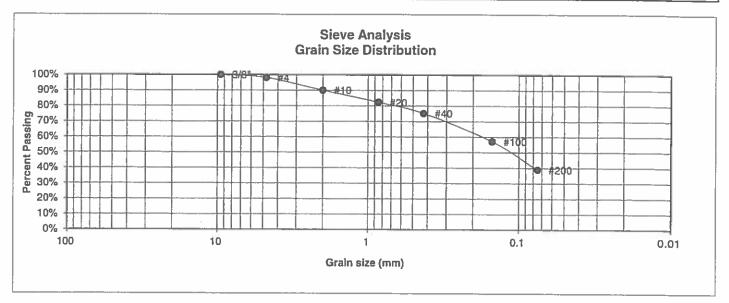


U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2" 3/8"	Percent <u>Finer</u> 100.0%	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
4 10	98.2% 90.1%	<u>Swell</u> Moisture at start
20 40	82.3% 75.2%	Moisture at start Moisture at finish Moisture increase
100 200	57.1% 38.9%	Initial dry density (pcf) Swell (psf)



LABORATORY TEST RESULTS			
DRAWN:	DATE:	CHECKED:	DATE: /0/25//7

JOB NO:: 170837

UNIFIED CLASSIFICATION	SM-SW	CLIENT	CARL TURSE
SOIL TYPE #	2	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-5	JOB NO.	170837
DEPTH (FT)	6-8	TEST BY	BL

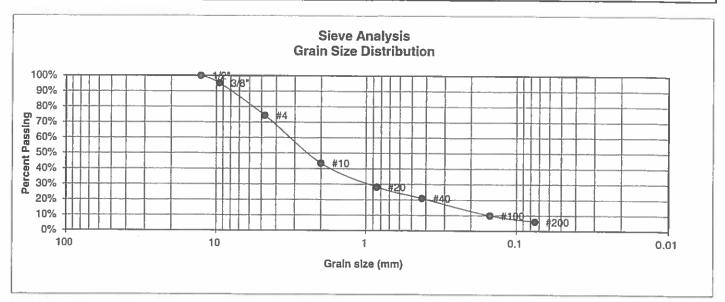


40 20.9% Moisture increase	U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2" 3/8"	Percent Finer 100.0% 95.2%	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
40 20.9% Moisture increase 100 10.0% Initial dry density			
initial dry definity			Moisture at finish Moisture increase
			Initial dry density (pcf) Swell (psf)



	LABOR RESUL	ATORY TEST TS	
DRAWN:	DATE:	CHECKED:	DATE: 10/25//2

JOB NO	
170837	

UNIFIED CLASSIFICATION	SC	CLIENT	CARL TURSE
SOIL TYPE #	2	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-6	JOB NO.	170837
DEPTH (FT)	3-8	TEST BY	BL

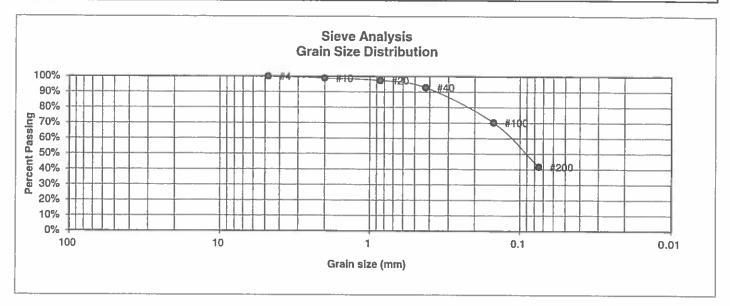


U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2" 3/8"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
4	100.0%	Swell
10	98.9%	Moisture at start
20	97.4%	Moisture at finish
40	92.8%	Moisture increase
100 200	70.3% 41.7%	Initial dry density (pcf) Swell (psf)



	LABORATOR RESULTS	ORY TEST	
DRAWN:	DATE	CHECKED:	DATE: /0/25//7

FIGNO:

UNIFIED CLASSIFICATION	SM	CLIENT	CARL TURSE
SOIL TYPE #	2	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-11	JOB NO.	170837
DEPTH (FT)	4-6	TEST BY	BL

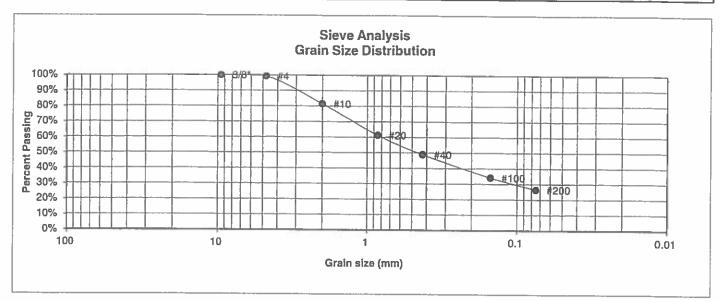


U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
3/8" 4 10	100.0% 99.2% 81.5%	<u>Swell</u> Moisture at start
20 40 100 200	61.3% 48.8% 34.2% 26.4%	Moisture at finish Moisture increase Initial dry density (pcf) Swell (psf)



LABORATORY TEST RESULTS			
DRAWN:	DATE:	CHECKED: ムムム	DATE: /0/25//7

UNIFIED CLASSIFICATION	SM	CLIENT	CARL TURSE
SOIL TYPE #	3	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	2	JOB NO.	170837
DEPTH (FT)	15	TEST BY	BL

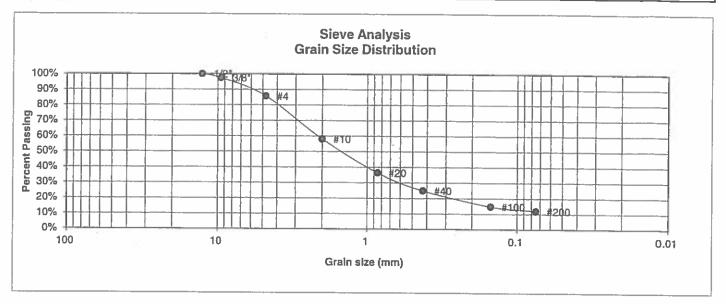


U.S. <u>Sieve #</u> 3" 1 1/2" 3/4" 1/2" 3/8"	Percent <u>Finer</u> 100.0% 97.4%	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
4	85.8%	<u>Swell</u>
10	58.1%	Moisture at start
20	36.4%	Moisture at finish
40	24.9%	Moisture increase
100	14.8%	Initial dry density (pcf)
200	11.9%	Swell (psf)



	LABORATORY TEST RESULTS		
DRAWN;	DATE:	CHECKED:	DATE 19/25/17

UNIFIED CLASSIFICATION	SM	CLIENT	CARL TURSE
SOIL TYPE #	3	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-3	JOB NO.	170837
DEPTH (FT)	5-6	TEST BY	BL

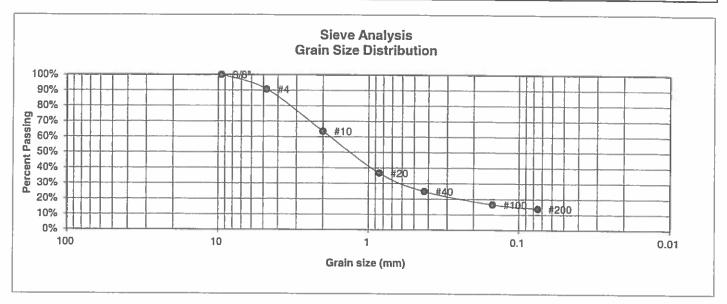

U.S.	Percent	Atterberg
Sieve #	<u>Finer</u>	<u>Limits</u>
3"		Plastic Limit
1 1/2"		Liquid Limit
3/4"		Plastic Index
1/2"		
3/8"	100.0%	
4	90.7%	<u>Swell</u>
10	63.6%	Moisture at start
20	36.7%	Moisture at finish
40	24.9%	Moisture increase
100	16.6%	Initial dry density (pcf)
200	13.9%	Swell (psf)


DRAWN;



LABORATORY TEST RESULTS		
DATE:	CHECKED:	DATE: 10/25/17

JOB NO.: 170837

UNIFIED CLASSIFICATION	SM-SW	CLIENT	CARL TURSE
SOIL TYPE #	3	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-7	JOB NO.	170837
DEPTH (FT)	6-8	TEST BY	BL

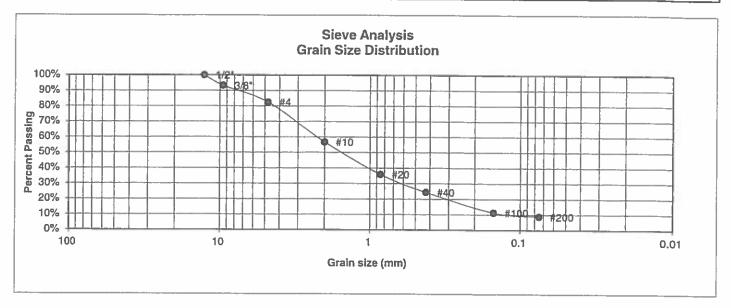


U.S. Sieve # 3" 1 1/2" 3/4"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
1/2" 3/8"	100.0%	
4	93.2% 82.5%	Swell
10 20	56.8% 35.9%	Moisture at start
40	24.3%	Moisture at finish Moisture increase
100 200	11.3% 8.8%	Initial dry density (pcf) Swell (psf)



	LABOR RESUL	ATORY TEST TS	•
DRAWN;	DATE:	CHECKED	DATE: /0 /25/57

FIGNO:

UNIFIED CLASSIFICATION	SM	CLIENT	CARL TURSE
SOIL TYPE #	3	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-8	JOB NO.	170837
DEPTH (FT)	6-8	TEST BY	BL

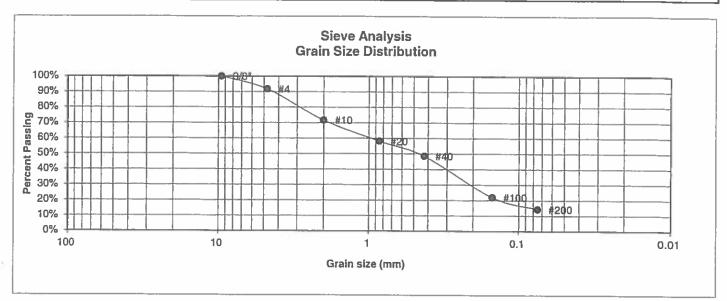


U.S. <u>Sieve #</u> 3" 1 1/2" 3/4"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit Liquid Limit Plastic Index
1/2" 3/8" 4 10	100.0% 91.7% 71.7%	<u>Swell</u> Moisture at start
20 40 100 200	58.1% 48.5% 22.0% 14.3%	Moisture at finish Moisture increase Initial dry density (pcf) Swell (psf)



	RESUL	RATORY TEST TS	
DRAWN:	DATE:	CHECKED:	DATE: /5/25/77

UNIFIED CLASSIFICATION	SM	CLIENT	CARL TURSE
SOIL TYPE #	3	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-12	JOB NO.	170837
DEPTH (FT)	5-6	TEST BY	BL

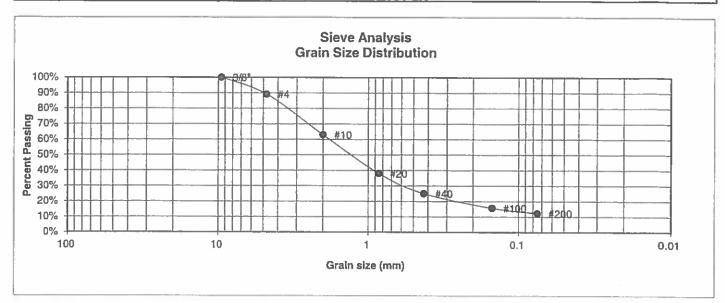


U.S. <u>Sieve #</u> 3"	Percent <u>Finer</u>	Atterberg <u>Limits</u> Plastic Limit
1 1/2" 3/4"		Liquid Limit Plastic Index
1/2"		i idalio ilidex
3/8"	100.0%	
4	89.2%	Swell
10	62.9%	Moisture at start
20	38.0%	Moisture at finish
40	25.0%	Moisture increase
100	15.7%	Initial dry density (pcf)
200	12.2%	Swell (psf)



	LABOR RESUL	ATORY TEST TS	
DRAWN:	DATE	CHECKED: 44	DATE 10/25//7

UNIFIED CLASSIFICATION	SM	CLIENT	CARL TURSE
SOIL TYPE #	3	PROJECT	ROLLIN RIDGE ESTATES
TEST BORING #	TP-13	JOB NO.	170837
DEPTH (FT)	1.5-8	TEST BY	BL

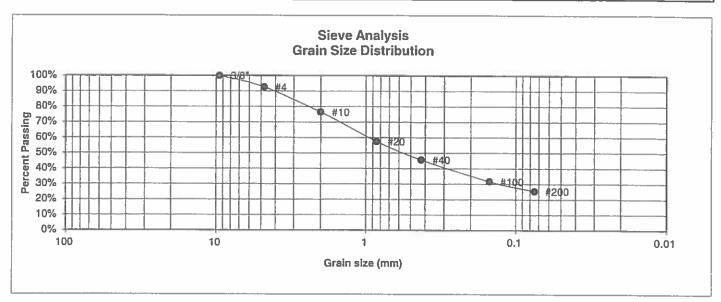

U.S.	Percent	Atterberg
Sieve #	<u>Finer</u>	<u>Limits</u>
3"		Plastic Limit
1 1/2"		Liquid Limit
3/4"		Plastic Index
1/2"		
3/8"	100.0%	
4	92.6%	<u>Swell</u>
10	76.5%	Moisture at start
20	57.5%	Moisture at finish
40	45.6%	Moisture increase
100	31.7%	Initial dry density (pcf)
200	25.4%	Swell (psf)

DRAWN:



LABORATO RESULTS		
DATE:	CHECKED:	DATE: 10/25//7

JOB NO.: 170837

APPENDIX D: Soil Survey Descriptions

El Paso County Area, Colorado

21—Cruckton sandy loam, 1 to 9 percent slopes

Map Unit Setting

National map unit symbol: 367s Elevation: 7,200 to 7,600 feet

Mean annual precipitation: 16 to 18 inches Mean annual air temperature: 42 to 46 degrees F

Frost-free period: 110 to 120 days

Farmland classification: Not prime farmland

Map Unit Composition

Cruckton and similar soils: 85 percent

Estimates are based on observations, descriptions, and transects of

the mapunit.

Description of Cruckton

Setting

Landform: Flats, hills

Landform position (three-dimensional): Side slope, talf

Down-slope shape: Linear Across-slope shape: Linear

Parent material: Alluvium derived from arkose

Typical profile

A - 0 to 11 inches: sandy loam
Bt - 11 to 28 inches: sandy loam
C - 28 to 60 inches: loamy coarse sand

Properties and qualities

Slope: 1 to 9 percent

Depth to restrictive feature: More than 80 inches

Natural drainage class: Well drained

Runoff class: Medium

Capacity of the most limiting layer to transmit water (Ksat):

Moderately high to high (0.60 to 2.00 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Available water storage in profile: Low (about 5.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 4e

Hydrologic Soil Group: B

Ecological site: Sandy Divide (R049BY216CO)

Hydric soil rating: No

Minor Components

Other soils

Percent of map unit: Hydric soil rating: No

Data Source Information

Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 14, Sep 23, 2016

El Paso County Area, Colorado

28—Ellicott loamy coarse sand, 0 to 5 percent slopes

Map Unit Setting

National map unit symbol: 3680 Elevation: 5,500 to 6,500 feet

Mean annual precipitation: 13 to 15 inches
Mean annual air temperature: 47 to 50 degrees F

Frost-free period: 125 to 145 days

Farmland classification: Not prime farmland

Map Unit Composition

Ellicott and similar soils: 85 percent

Estimates are based on observations, descriptions, and transects of

the mapunit.

Description of Ellicott

Setting

Landform: Flood plains, stream terraces
Landform position (three-dimensional): Tread

Down-slope shape: Linear Across-slope shape: Linear Parent material: Sandy alluvium

Typical profile

A - 0 to 4 inches: loamy coarse sand

C - 4 to 60 inches: stratified coarse sand to sandy loam

Properties and qualities

Slope: 0 to 5 percent

Depth to restrictive feature: More than 80 inches Natural drainage class: Somewhat excessively drained

Runoff class: Very low

Capacity of the most limiting layer to transmit water (Ksat): High to

very high (5.95 to 19.98 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: Frequent Frequency of ponding: None

Available water storage in profile: Low (about 4.1 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7w

Hydrologic Soil Group: A

Ecological site: Sandy Bottomland LRU's A & B (R069XY031CO)

Other vegetative classification: SANDY BOTTOMLAND

(069AY031CO)
Hydric soil rating: No

Minor Components

Fluvaquentic hapiaquoil

Percent of map unit: Landform: Swales Hydric soil rating: Yes

Other soils

Percent of map unit: Hydric soil rating: No

Pieasant

Percent of map unit: Landform: Depressions Hydric soil rating: Yes

Data Source Information

Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 14, Sep 23, 2016

El Paso County Area, Colorado

41—Kettle gravelly loamy sand, 8 to 40 percent slopes

Map Unit Setting

National map unit symbol: 368h Elevation: 7,000 to 7,700 feet

Farmland classification: Not prime farmland

Map Unit Composition

Kettle and similar soils: 85 percent

Estimates are based on observations, descriptions, and transects of

the mapunit.

Description of Kettle

Setting

Landform: Hills

Landform position (three-dimensional): Side slope

Down-slope shape: Linear Across-slope shape: Linear

Parent material: Sandy alluvium derived from arkose

Typical profile

E - 0 to 16 inches: gravelly loamy sand Bt - 16 to 40 inches: gravelly sandy loam

C - 40 to 60 inches: extremely gravelly loamy sand

Properties and qualities

Slope: 8 to 40 percent

Depth to restrictive feature: More than 80 inches Natural drainage class: Somewhat excessively drained

Runoff class: Medium

Capacity of the most limiting layer to transmit water (Ksat): High

(2.00 to 6.00 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Available water storage in profile: Low (about 3.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7e

Hydrologic Soil Group: B Hydric soil rating: No

Minor Components

Other soils

Percent of map unit: Hydric soil rating: No

Pleasant

Percent of map unit: Landform: Depressions Hydric soil rating: Yes

Data Source Information

Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 14, Sep 23, 2016

El Paso County Area, Colorado

68—Peyton-Pring complex, 3 to 8 percent slopes

Map Unit Setting

National map unit symbol: 369f Elevation: 6,800 to 7,600 feet

Farmland classification: Not prime farmland

Map Unit Composition

Peyton and similar soils: 40 percent Pring and similar soils: 30 percent

Estimates are based on observations, descriptions, and transects of

the mapunit.

Description of Peyton

Setting

Landform: Hills

Landform position (three-dimensional): Side slope

Down-slope shape: Linear Across-slope shape: Linear

Parent material: Arkosic alluvium derived from sedimentary rock and/or arkosic residuum weathered from sedimentary rock

Typical profile

A - 0 to 12 inches: sandy loam

Bt - 12 to 25 inches: sandy clay loam

BC - 25 to 35 inches: sandy loam

C - 35 to 60 inches: sandy loam

Properties and qualities

Slope: 3 to 5 percent

Depth to restrictive feature: More than 80 inches

Natural drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat):

Moderately high (0.20 to 0.60 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Available water storage in profile: Moderate (about 7.3 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 4c

Hydrologic Soil Group: B

Ecological site: Sandy Divide (R049BY216CO)

Hydric soil rating: No

Description of Pring

Setting

Landform: Hills

Landform position (three-dimensional): Side slope

Down-slope shape: Linear Across-slope shape: Linear

Parent material: Arkosic alluvium derived from sedimentary rock

Typical profile

A - 0 to 14 inches: coarse sandy loam
C - 14 to 60 inches: gravelly sandy loam

Properties and qualities

Slope: 3 to 8 percent

Depth to restrictive feature: More than 80 inches

Natural drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): High

(2.00 to 6.00 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Available water storage in profile: Low (about 6.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: B

Ecological site: Loamy Park (R048AY222CO)

Hydric soil rating: No

Minor Components

Other soils

Percent of map unit: Hydric soil rating: No

Pleasant

Percent of map unit: Landform: Depressions Hydric soil rating: Yes

Data Source Information

Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 14, Sep 23, 2016

APPENDIX E: Percolation Test Results

Client:

Carl Turse

Test Location:

Rollin Ridge Estates

Job Number: 170837

PERCOLATION HOLES

Date Holes Prepared:

7/10/2017

Date Hole Completed: 7/11/2017

PH-1

Hole No. 1 Depth:

34"

Hole No. 2

Denth: 36"

Hole No. 3

Depth: 33"

			- op a	50		Deput.	JJ	
		Water			Water	•		Water
	. Time	Level		Time	Level		Time	Level
<u>Trial</u>	<u>(min.)</u>	Change (in.)	<u>Trial</u>	<u>(min.)</u>	Change (in.)	<u>Trial</u>	(min.)	Change (in.)
1	10	1/8	1	10	1/8	1	10	1/4
2	10	1/4	2	10	1/8	2	10	1/4
3	10	1/8	3	10	1/8	3	10	1/4

Average Perc Rate (min./in.)

67

Perc Rate (min./in.): 80 Perc Rate (min./in.): 80 Perc Rate (min./in.): 40

PROFILE HOLE

Date Profile Hole Completed: 7/10/2017

Depth 0-10'

Visual Classification

Clay, sandy, tan

Remarks

No Bedrock No Groundwater

10 Blows / ft. @ 2' 12 Blows / ft. @ 4'

15 Blows / ft. @ 9'

LTAR = 0.30 gallons per square foot per day.

Remarks:

Observer: Stu Wood

By:

PERCOLATION TEST RESULTS

DRAWN

DATE:

CHECKED:

DATE: 7 /19/17

170837 FIG NO:

JOB NO.:

E-1

Client:

Carl Turse

Test Location:

Rollin Ridge Estates

Job Number:

170837

PERCOLATION HOLES

Date Holes Prepared:

7/10/2017

Date Hole Completed:

7/11/2017

PH-2

Hole No. 1

46"

Hole No. 2

Hole No. 3

				_		*******	i wil	
Depth:	46"		Depth:	42"		Depth:	40"	
		Water			Water	•		Water
	Time	Level		Time	Level		Time	Level
<u>Trial</u>	<u>(min.)</u>	Change (in.)	<u>Trial</u>	<u>(min.)</u>	Change (in.)	<u>Trial</u>	(min.)	Change (in.)
1	10	1/16	1	10	3/4	1	10	1/2
2	10	1/8	2	10	1/2	2	10	3/8
3	10	1/16	3	10	1/4	3	10	3/8

Average Perc Rate (min./in.)

76

PROFILE HOLE

Date Profile Hole Completed:

Perc Rate (min./in.): 40 Perc Rate (min./in.): 27

7/10/2017

Depth

Visual Classification

0-31

Clay, sandy, tan

3-12' 12-20' Sand, clayey, fine to coarse grained, tan

Sandstone, slightly silty, fine to coarse grained, tan

Sandstone Bedrock at 12' No Groundwater

Remarks

Blows / ft. @ 2' Blows / ft. @ 4' Blows / ft. @ 9'

LTAR = 0.20 gallons per square foot per day.

Perc Rate (min./in.): 160

Remarks:

Observer: Stu Wood

By:



PERCOLATION TEST RESULTS

DRAWN DATE CHECKED: DATE: 7/19/17 JOB NO.: 170837 FIG NO E - Z

APPENDIX F: El Paso County Health Department Septic Records

of

EL PASO COUNTY DEPARTMENT OF HEALTH AND ENVIRONMENT Permit # 0N0007076 INDIVIDUAL SEWAGE DISPOSAL SYSTEM INSPECTION FORM Date April 17, 2006 APPROVED: Yes No Environmental Health Specialist: (3285 Hodgen Road Owner Cooper Legal Description _ - See A Hacked-Residence # Bedrooms 3 Commercial System Installer (Onwa to Earth 2006) (Res Orthing 1993) SEPTIC TANK: Commercial Noncommercial Construction Material Concrete Capacity Gallon 1, 250 Gallans **DISPOSAL FIELD:** Trench: Depth (Range) _ ____ Width ___ ____ Rings (Pit 1) ____ #2 ____ Total Sq. Ft. _____ 3 6 + 3 6 = Size (L x W) #1 ROCKLESS SYSTEMS: Slandard Chamber: Type Folk | #Chambers 72 Sq. Ft./Chamber 15.5 Bed | Trench | High Profile Units: Type Chamber | #Chambers | Sq. Ft./Chamber | Bed | Trench | Reduction Allowed | #70 % Sq. Ft. Required | #77 | Depth (Range) | 12" > 36" Sq. Ft. Installed Equivalent Sq. Ft. Installed with Reduction 930 FTL = 1860 FTL Engineering Firm Approval letter provided? Y N Well installed at time of septic system inspection? N Public Water? *Approval will be revoked if in the future the well is found to be within 50 feet of the septic tank and/or 100 feet of the disposal field. NOTES: WS11 22"0-9 توطع ١٠ 10 56-00 2 2 2640 hense П 27-amp Addition To director 14-200 Green House Area / Garden Low Fristin Director 26-0m Existing Lunch pred VAIRE 20 4-93 12' Addition 4011

4-2006

16. Ump

N

EL PASO COUNTY

DEPARTMENT OF HEALTH AND ENVIRONMENT

301 S Union Blvd, Colorado Springs, Colorado 719-575-8636

INDIVIDUAL SEWAGE DISPOSAL SYSTEM PERMIT

OWNER NAME:

KAY T COOPER

PERMIT NUMBER: ON0007076

ADDRESS:

3285 HODGEN ROAD

DATE PERMITTED:

3/30/2006

CITY,STATE,ZIP: INSTALLED BY:

COLORADO SPRINGS

CO

PHONE NUMBER:

7194953152

This permit is issued in accordance with 25-10-107 Colorado Revised Statues. PERMIT EXPIRES upon completion-installation of sewage-disposal system or at the end of twelve (12) months from date of issue- whichever occurs first-(unless work is in progress). If both a building and an ISDS permit are issued for the same property and construction has not commenced prior to the expiration date of the building permit, the ISDS permit shall expire at the same time as the building permit. This permit is revokable if all stated requirements are not met.

80921

Sewage disposal system to be installed by an El Paso County Licensed System Contractor or the property owner.

THIS PERMIT DOES NOT DENOTE APPROVAL OF ZONING AND ACREAGE REQUIREMENTS.

Rosemany C. Bakes - Martin

DIRECTOR, EL PASO COUNTY DEPARTMENT OF HEALTH AND ENVIRONMENT

PERMIT EXPIRATION DATE:

Expires twelve months from date of issue

Jenet Christenson 578-3141

ENVIRONMENTALIST / PHONE NUMBER*

* NOTE: FOR INSPECTIONS CALL 575-8699 BEFORE 8:30 A.M. OF THE DAY TO BE INSPECTED.

(WEEKENDS & HOLIDAYS EXCLUDED)

LEAVE THE ENTIRE SEWAGE DISPOSAL SYSTEM UNCOVERED FOR FINAL INSPECTION.

WATER SOURCE:

WELL.

MINIMUM SEPTIC TANK SIZE: EXISTING 1250 GALLONS

MINIMUM ABSORPTION AREA REQUIRED

N/4 __ SQ FT

PLANNING DEPARTMENT



ENUMERATION



FLOOD PLAIN



WASTEWATER



COMMENTS:

OWNER MAY ADD DESIRED SQUARE FOOTAGE DIRECTLY TO THE EXISTING LEACH FIELD.

DEPTH OF SYSTEM SHALL NOT EXCEED 4 FEET BELOW NATIVE GROUND SURFACE DUE TO BEDROCK AT 8 FEET. (SOIL PERCOLATION TEST OF FEB 1993).

IF A DIVERTER VALVE IS INSTALLED - A MINIMUM OF 917 SQUARE FEET ABSORPTION AREA MUST BE INSTALLED. IF OWNER DESIRES TO BRING EXISTING ABSORPTION AREA SQUARE FOOTAGE TO CURRENT REGULATION SIZE, AN ADDITIONAL 317 SQUARE FEET PLUS CURRENT 600 SQUARE FEET = 917 SQUARE FEET.

The Health Office shall assume no responsibility in case of failure or inadequacy of a sewage-disposal system, beyond consulting in good faith with the property owner or representative. Free access to the property shall be authorized at reasonable time for the purpose of making such inspections as are necessary to determine compliance with requirements of this law.

VIV.	FOR ADMINISTRATIVE USE ONLY	
Permit Ready: 3 3 Called	Mailed	
Final inspection Required: DV: A. V.	e Drum Death Date Called In: 4/17/0	1 1/12/
rma mspecifon requested: B1	Date Called In: 7/17/8	6 6:44
Phone #	Septic Site will be ready:	10u

EL PASO COUNTY DEPARTMENT OF HEALTH & ENVIRONMENT.

301 South Union Boulevard • Colorado Springs, CO • 80910-3123 • (719) 575-8635 • Fax: (719) 578-3188

*ALL PAYMENTS ARE DUE AT TIME OF SUBMITTAL IN CASH OR CHECK

APPLICATION FOR AN ON-SITE WASTEWATER TREATMENT SYSTEM PERMIT
UNEW CONSTRUCTION UMINOR REPAIR UMAJOR REPAIR/ADD 495-315
Owner Kay T Cooper Mi Chael D Stowell Daytime Phone 719-34. Address of Property 3285 Hodgen Road City & Zip C/5 Co F0921
Address of Property 3285 Hudgen Road City & Zip C/5 Co FU921
Legal Description EZ NEY NWY EX N 30 FT JEC 27-11-66
Owner's MAILING Address Shall City, State & Zip
Lot Size 2162 Tax Schedule # 6/270-00-055
Type of Building: DFrame DModular DMobile DCommercial DManufactured DOther
Water Supply: Well or Spring Cistern Public Inside City Limits: No Yes-City
MAIL PERMIT OR PICK UP PERMIT THERE IS AN ADDITIONAL RESIDENCE ON THIS PROPERTY
MAXIMUM POTENTIAL NUMBER OF BEDROOMS3
Percolation Test Attached Y Basement Y N Garbage Disposal Y N Clothes Washer Y N
I have supplied a plot plan as described on the back of this form. I acknowledge the completeness of the application is conditional upon such further mandatory and additional tests and reports as may be required by the Department to be made and furnished by an applicant for purposes of evaluating the application, and issuance of the permit is subject to such terms and conditions as deemed necessary to ensure compliance with rules and regulations adopted pursuant to C.R.S. 25-10-107 et. seq. I hereby certify all represented to be true and correct to the best of my knowledge and belief, and are designed to be relied on by the El Paso County Department of Health and Environment in evaluating the same for purposes of issuing the permit applied for herein. I further understand any falsification or misrepresentation may result in the denial of the application or revocation of any permit granted based upon said application and in legal action for perjury as provided by law.
OWNER'S SIGNATURE See all (Led Replication) Date 3/29/0 L You will be notified by telephone when your permit is ready for pick up. Please allow a minimum of 10 days for new septics.
DEPARTMENT OF HEALTH USE ONLY
Existing 1250 Minimum Tank Capacity Minimum Absorption Area Date of Site Inspection
REMARKS Quenes may add desired Square todage directly to the existing leach field. Depth of system shall not exceed 4ft belowd pative ground Surface due to bedrack at 8ft (Sil percolation test of Feb. 1993). "If a director value is installed — a minimum of 917 ft 2 absorption area must be installed. If awarer des ires to bring existing absorption area square footage to current regulation size, an additional 317 ft 2 + current 600 ft 2 = 917 ft 2.
EHS INSPECTOR Jant Counter DATE 03-30-00 APPROVED DENIED
FEES AS OF 02/22/2006: NEW CONSTRUCTION \$350,00 + Planning Department Surcharge of \$118.00. 16468.00 MAJOR REPAIR/ADDITION \$430.00 MINOR REPAIR/ADDITION \$179.00 DATE TO PLANNING / WASTEWATER: DATE TO FLOODPLAIN/ENUMERATIONS
PLEASE COMPLETE THE BACK OF THIS FORM

1) We require an original of your <u>PERCOLATION (PERC) TEST</u> with an original professional engineer's (PE) stamp and signature as well as a plot of the percolation test hole locations with measurements from a fixed reference point.	
2) PROPERTY ADDRESS OR LOT NUMBER MUST BE POSTED AND CLEARLY VISIBLE FROM ROAD. PERC HOLES MUST BE CLEARLY MARKED OR AN ADDITIONAL CHARGE FOR A RETURN TRIP TO THE SITE MAY BE ASSESSED.	
3) A PLOT PLAN must be drawn (not to scale) on an 8 ½ x 11 sheet of paper. The plot plan must include: 1) a north bearing 4) all buildings (proposed or existing). 7) driveway (proposed or existing and name of adjoining street)	
4) Initial any of the following features that apply to your property and INCLUDE them on your PLOT PLAN. Well(s) Adjacent property well(s) Subsoil drain Water line	
5) Initial any of the following that are within 100 feet of your proposed septic system and INCLUDE PROPERTY PLOT PLAN. Spring(s)Lake(s)Pond(s)Stream(s)Dry Gulch(es)Natural drainage course(s)	
GIVE COMPLETE DIRECTIONS TO THE PROPERTY FROM A MAIN HIGHWAY Hwy 83 North West on Hodgen about 4 mile drive way on Le FT side. * Please CM1 before 80 ing out * Cell-210-1971 2 4009 set private - Everytire 8 = miles 29 page 11 be 10 page 11 be 10	
Perc Rute 18 min / Inch bedrock@ 84th	