CONSTRUCTION PLANS

SKYLINE AT LORSON RANCH FILING NO. 1

STORM SEWER CONSTRUCTION PLANS including STREETS (FOR INFORMATION ONLY)





PREPARED FOR: LORSON, LLC N. WAHSATCH AVE., SUITE 301 COLORADO SPRINGS, CO 80903 719-635-3200 CONTACT: JEFF MARK

PREPARED BY: **CORE ENGINEERING GROUP**

BURNSVILLE, MN 55306 719-570-1100 CONTACT: RICHARD L. SCHINDLER P.E.

21-002

LEGEND

——— – SUBDIVISION BOUNDARY ——— — EXISTING AND PROPOSED RIGHT OF WAY EXISTING AND PROPOSED LOT LINES — — — EXISTING AND PROPOSED EASEMENTS —— – —— STREET CENTERLINE PROPOSED CURB AND GUTTER — EX-W — EXISTING WATERMAIN PROPOSED WATERMAIN EXISTING SANITARY SEWER PROPOSED SANITARY SEWER **EXISTING 24" SANITARY SEWER EXISTING GASMAIN** EXISTING UNDERGROUND ELECTRIC EXISTING OVERHEAD ELECTRIC EXISTING CABLE TV EXISTING PHONE OR FIBER OPTIC EXISTING STORM DRAIN PROPOSED STORM SEWER EXISTING MANHOLES PROPOSED SANITARY AND STORM MANHOLES

Know what's below. Call before you dig.

CALL 2-BUSINESS DAYS IN ADVANCE BEFORE YOU DIG, GRADE OR EXCAVATE FOR THE MARKING OF UNDERGROUND MEMBER UTILITIES

SHEET INDEX					
SHEET NO.	SHEET DESCRIPTION				
C1.1	COVER SHEET				
C1.2	NOTES				
C1.3	TYPICAL SECTIONS				
C2.1	STREET HORIZONTAL CONTROL				
C5.1-C5.2	SIGNING/STRIPING PLANS (FOR INFORMATION ONLY)				
C6.1-C6.6	STREET PLAN AND PROFILES (FOR INFORMATION ONLY)				
C7.1-C7.2	PLAN AND PROFILE — STORM LATERALS & FOREBAY				
C9.1	POND C4 FULL SPECTRUM OUTLET STRUCTURE				
C10.1-C10.3	DETAILS				

DEVELOPER'S STATEMENT

THE UNDERSIGNED OWNER/DEVELOPER HAS READ AND WILL COMPLY WITH ALL THE REQUIREMENTS SPECIFIED IN THESE CONSTRUCTION PLANS AND THE ACCOMPANYING DRAINAGE REPORT.

BUSINESS NAME .	LORSON, LLC	
BY		DATE
TITLE		
ADDRESS	212 N. WAHSATCH AVE. SUITE 301	
	COLORADO SPRINGS, CO 80903	

CONSTRUCTION APPROVAL COUNTY PLAN REVIEW IS PROVIDED ONLY FOR GENERAL CONFORMANCE WITH COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE FOR THE ACCURACY AND ADEQUACY OF THE DESIGN, DIMENSIONS, AND/OR ELEVATIONS WHICH SHALL BE CONFIRMED AT THE JOB SITE. THE COUNTY THROUGH THE APPROVAL OF THIS DOCUMENT ASSUMES NO RESPONSIBILITY FOR COMPLETENESS AND/OR ACCURACY OF THIS DOCUMENT.

FILED IN ACCORDANCE WITH THE REQUIREMENTS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE, DRAINAGE CRITERIA MANUALS VOLUME 1 AND 2, AND ENGINEERING CRITERIA MANUAL AS AMENDED. IN ACCORDANCE WITH ECM SECTION 1.12, THESE CONSTRUCTION DOCUMENTS WILL BE VALID FOR CONSTRUCTION FOR A PERIOD OF 2 YEARS FROM THE DATE SIGNED BY THE EL PASO COUNTY ENGINEER. IF CONSTRUCTION HAS NOT STARTED WITHIN THOSE TWO YEARS THE PLANS WILL NEED TO BE RESUBMITTED FOR APPROVAL, INCLUDING PAYMENT OF REVIEW FEES AT THE PLANNING AND COMMUNITY DEVELOPMENT DIRECTOR'S DISCRETION

DATE

JENNIFER IRVINE, COUNTY ENGINEER/ECM ADMINISTRATOR CONDITIONS: FOR STORM SEWER ONLY

ENGINEER'S APPROVAL

THESE DETAILED PLANS AND SPECIFICATIONS WERE PREPARED UNDER MY DIRECTION AND SUPERVISION. SAID PLANS AND SPECIFICATIONS HAVE BEEN PREPARED ACCORDING TO THE CRITERIA ESTABLISHED BY THE COUNTY FOR DETAILED ROADWAY, DRAINAGE, GRADING AND EROSION CONTROL PLANS AND SPECIFICATIONS, AND SAID PLANS AND SPECIFICATIONS ARE IN CONFORMITY WITH APPLICABLE MASTER DRAINAGE PLANS AND MASTER TRANSPORTATION PLANS. SAID PLANS AND SPECIFICATIONS MEET THE PURPOSES FOR WHICH THE PARTICULAR ROADWAY AND DRAINAGE FACILITIES ARE DESIGNED AND ARE CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I ACCEPT RESPONSIBILITY FOR ANY LIABILITY CAUSED BY ANY NEGLIGENT ACTS, ERRORS OR OMISSIONS ON MY PART IN PREPARATION OF THESE DETAILED PLANS AND SPECIFICATIONS.

RICHARD L. SCHINDLER, P.E. # 33997 FOR AND ON BEHALF OF CORE ENGINEERING GROUP

SEWER ORM OR O

DESIGNED: RLS CHECKED: RLS

NOV 30, 2020

PROJECT NO.

100.063 SHEET NUMBER C0.1 TOTAL SHEETS: 18

BASIS OF BEARING

FIMS MONUMENT F204 LOCATED AT THE NORTHWEST CORNER OF FONTAINE BLVD AND COTTONWOOD GROVE DR. ELEVATION 5724.072 (N.G.V.D. 29)

BEARINGS ARE BASED ON THE SOUTH LINE OF THE NORTH HALF OF SECTION 23, TOWNSHIP 15 SOUTH, RANGE 65 WEST OF THE 6TH PRINCIPAL MERIDIAN AS BEING SOUTH 8941'52" WEST. THE EAST QUARTER CORNER OF

SAID SECTION 23 IS A FOUND 3-1/2" ALUMINUM CAP MONUMENT AND THE WEST QUARTER CORNER OF SAID

COMCAST

P.O. BOX 173838

DENVER, CO 80217

970-641-4774

BLACK HILLS ENERGY

7060 ALLEGRE ST.

FOUNTAIN, CO 80817

719-393-6639

MOUNTAIN VIEW ELECTRIC

11140 E. WOODMEN RD.

COLORADO SPRINGS, CO 80831

EL PASO COUNTY

DEVELOPMENT

2880 INTERNATIONAL CIRCLE

COLORADO SPRINGS, CO 80910

719-520-6300

PLANNING AND COMMUNITY

719-495-2283

TRAFFIC CONTROL NOTE

WATER / SANITARY WIDEFIELD WATER AND SANITATION

DISTRICT

8495 FONTAINE BLVD.

COLORADO SPRINGS, CO 80925

719-390-7111

TELEPHONE

CENTURYLINK

7925 INDUSTRY ROAD

COLORADO SPRINGS, CO 80939

719-278-4651

THE CONTRACTOR SHALL PROVIDE ALL TRAFFIC CONTROL DEVICES AND MONITORING NECESSARY TO SAFELY COMPLETE THE WORK SHOWN IN THESE CONSTRUCTION DOCUMENTS IN CONFORMANCE WITH M.U.T.C.D. GUIDELINES. THE CONTRACTOR SHALL COMPLETE ALL NECESSARY WORK FOR PLAN REVIEW, PERMITS AND PROCESSING. TRAFFIC CONTROL WILL NOT BE PAID SEPARATELY BUT IS INCLUDED IN THE COST OF THE PROJECT.

SECTION 23 IS A FOUND 2-1/2" ALUMINUM CAP MONUMENT

CURB AND GUTTER C/L CENTERLINE CTY COUNTY ΕX EXISTING FLOW LINE OPT. OPTIONAL PCR PROP PROPOSED RT/LT RIGHT/LEFT REM REMOVE STA STATION

SECURITY FIRE PROTECTION

DISTRICT

400 SECURITY BOULEVARD

SECURITY, CO 80911

719-392-7121

POINT OF CURVATURE

TOP BACK OF CURB

EXISTING UTILITY POLE PROPOSED STORM SEWER INLET PUDSP-20-00X EGP 20-00X

EXISTING AND PROPOSED WATERMAIN VALVES

EXISTING AND PROPOSED FIRE HYDRANT

CONSTRUCTION NOTES

- 1. ALL WORK SHALL COMPLY WITH THE CODES AND POLICIES FOR EL PASO COUNTY.
- 2. EXISTING TOPOGRAPHIC INFORMATION SHOWN ON THIS GRADING PLAN WAS OBTAINED FROM DREXEL, BARRELL & CO., JULY, 2005. SUPPLEMENTAL SURVEY DATA WAS OBTAINED FOR MARKSHEFFEL ROAD FROM M&S CIVIL GROUP IN NOVEMBER, 2016. THE CONTRACTOR SHALL BE RESPONSIBLE TO EXAMINE THE SITE AND BE FAMILIAR WITH THE EXISTING CONDITIONS.
- 3. DEPTH OF MOISTURE—DENSITY CONTROL FOR THIS PROJECT SHALL BE AS FOLLOWS: BASE OF ALL CUTS AND FILLS 12 INCHES, FULL DEPTH OF ALL EMBANKMENTS
- 4. THE CONTRACTOR IS RESPONSIBLE FOR THE RE-ESTABLISHMENT OF ALL SURVEY MONUMENTS DISTURBED WITHIN THE PROJECT LIMITS.
- 5. THE CONTRACTOR SHALL PROTECT ALL WORK AREAS AND FACILITIES FROM FLOODING AT ALL TIMES. AREAS AND FACILITIES SUBJECTED TO FLOODING, REGARDLESS OF THE SOURCE OF WATER, SHALL BE PROMPTLY DEWATERED AND RESTORED.
- 6. PRIOR TO PAVING OPERATIONS, THE ENTIRE SUBGRADE SHALL BE PROOF-ROLLED WITH A LOADED 988 FRONT-END LOADER OR SIMILAR HEAVY RUBBER TIRED VEHICLE (GVW OF 50,000 POUNDS WITH 18 KIP PER AXLE AT TIRE PRESSURES OF 90 PSI) TO DETECT ANY SOFT OR LOOSE AREAS. IN AREAS WHERE SOFT OR LOOSE SOILS, PUMPING OR EXCESSIVE MOVEMENT IS OBSERVED, THE EXPOSED MATERIALS SHALL BE OVER-EXCAVATED TO A MINIMUM DEPTH OF TWO FEET BELOW PROPOSED FINAL GRADE OR TO A DEPTH AT WHICH SOILS ARE STABLE. AFTER THIS HAS BEEN COMPLETED, THE EXPOSED MATERIALS SHALL BE SCARIFIED TO A DEPTH OF 12 INCHES AND MOISTURE CONDITIONED. THE SUBGRADE SHALL THEN BE UNIFORMLY COMPACTED TO A MINIMUM OF 95% OF STANDARD PROCTOR DENSITY (ASTMM D-698) AT 0 TO +4.0% OF OPTIMUM MOISTURE CONTENT FOR A-6 AND A-7-6 SOILS ENCOUNTERED. OTHER SUBGRADE TYPES SHALL BE UNIFORMLY COMPACTED TO A MINIMUM OF 95% OF MODIFIED PROCTOR DENSITY (ASTM D-1557) AT PLUS OR MINUS 2.0% OF OPTIMUM MOISTURE CONTENT. AREAS WHERE STABLE NATURAL SOILS ARE ENCOUNTERED AT PROPOSED SUBGRADE ELEVATION SHALL ALSO BE SCARIFIED (18 INCHES FOR A-7-6 SOILS BELOW FULL-DEPTH ASPHALT CONCRETE) AND COMPACTED AS OUTLINED ABOVE PRIOR TO PAVING OPERATIONS. SUBGRADE FILL SHALL BE PLACED IN SIX-INCH LIFTS AND UNIFORMLY COMPACTED, MEETING THE REQUIREMENTS AS PREVIOUSLY DESCRIBED.
- 7. SUBGRADE MATERIALS DEEMED UNSUITABLE BY THE ENGINEER SHALL BE EXCAVATED, DISPOSED OF AND REPLACED WITH APPROVED MATERIALS.
- 8. FILL SHALL BE PLACED IN 8-INCH MAXIMUM LOOSE LIFTS AND SHALL BE COMPACTED PRIOR TO SUCCESSIVE LIFTS.
- 9. THE CONTRACTOR IS RESPONSIBLE FOR PREVENTING AND CONTROLLING EROSION DURING CONSTRUCTION ACTIVITIES AT ALL TIMES DURING GRADING AND CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE THE FOLLOWING EROSION AND SEDIMENT CONTROL MEASURES:
 - HAY BALE BARRIERS WHERE NEEDED AND/OR AS DIRECTED BY THE ENGINEER.
 - SILT FENCE WHERE NEEDED AND/OR AS DIRECTED BY THE ENGINEER.
 - TEMPORARY SEDIMENTATION BASINS WHERE NEEDED AND/OR AS DIRECTED BY THE ENGINEER.
 - MULCHING AND SEEDING OF EXCESSIVE SLOPED AREAS AS NEEDED OR AS DIRECTED BY THE ENGINEER.
 - TEMPORARY VEHICLE TRACKING CONTROL AS NEEDED AND/OR DIRECTED BY THE ENGINEER.
 - CONCRETE WASH AREAS.
 - INLET PROTECTION.

THESE AND ALL EROSION CONTROL BEST MANAGEMENT PRACTICES AS SHOWN IN THE GRADING AND EROSION CONTROL PLANS SHALL BE STRICTLY ADHERED TO.

10. FINISHED CONTOURS/SPOT ELEVATIONS SHOWN HEREON REPRESENT FINISHED GRADES. ALL PAVEMENT SUBGRADES ARE BASED ON THE COMPOSITE ASPHALT PAVEMENT RECOMMENDATIONS MADE IN THE "GEOTECHNICAL STUDY" FOR LORSON RANCH.

EL PASO COUNTY STANDARD CONSTRUCTION NOTES:

- 1. ALL DRAINAGE AND ROADWAY CONSTRUCTION SHALL MEET THE STANDARDS AND SPECIFICATIONS OF THE CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2, AND THE EL PASO COUNTY ENGINEERING CRITERIA MANUAL.
- 2. CONTRACTOR SHALL BE RESPONSIBLE FOR THE NOTIFICATION AND FIELD NOTIFICATION OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THE PLANS OR NOT, BEFORE BEGINNING CONSTRUCTION. LOCATION OF EXISTING UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. CALL 811 TO CONTACT THE UTILITY NOTIFICATION CENTER OF COLORADO (UNCC).
- 3. CONTRACTOR SHALL KEEP A COPY OF THESE APPROVED PLANS, THE GRADING AND EROSION CONTROL PLAN, THE STORMWATER MANAGEMENT PLAN (SWMP), THE SOILS AND GEOTECHNICAL REPORT, AND THE APPROPRIATE DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS AT THE JOB SITE AT ALL TIMES, INCLUDING THE FOLLOWING:
 - a. EL PASO COUNTY ENGINEERING CRITERIA MANUAL (ECM)
 - b. CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2 c. COLORADO DEPARTMENT OF TRANSPORTATION (CDOT) STANDARD SPECIFICATIONS FOR ROAD AND
- BRIDGE CONSTRUCTION
 d. CDOT M & S STANDARDS
- 4. NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS FROM REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING. ANY MODIFICATIONS NECESSARY TO MEET CRITERIA AFTER—THE—FACT WILL BE ENTIRELY THE DEVELOPER'S RESPONSIBILITY TO RECTIFY.
- 5. IT IS THE DESIGN ENGINEER'S RESPONSIBILITY TO ACCURATELY SHOW EXISTING CONDITIONS, BOTH ONSITE AND OFFSITE, ON THE CONSTRUCTION PLANS. ANY MODIFICATIONS NECESSARY DUE TO CONFLICTS, OMISSIONS, OR CHANGED CONDITIONS WILL BE ENTIRELY THE DEVELOPER'S RESPONSIBILITY TO RECTIFY.
- 6. CONTRACTOR SHALL SCHEDULE A PRE-CONSTRUCTION MEETING WITH PLANNING AND COMMUNITY DEVELOPMENT (PCD) INSPECTIONS, PRIOR TO STARTING CONSTRUCTION.
- 7. IT IS THE CONTRACTOR'S RESPONSIBILITY TO UNDERSTAND THE REQUIREMENTS OF ALL JURISDICTIONAL AGENCIES AND TO OBTAIN ALL REQUIRED PERMITS, INCLUDING BUT NOT LIMITED TO EL PASO COUNTY EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP), REGIONAL BUILDING FLOODPLAIN DEVELOPMENT PERMIT, U.S. ARMY CORPS OF ENGINEERS—ISSUED 401 AND/OR 404 PERMITS, AND COUNTY AND STATE FUGITIVE DUST PERMITS.
- B. CONTRACTOR SHALL NOT DEVIATE FROM THE PLANS WITHOUT FIRST OBTAINING WRITTEN APPROVAL FROM THE DESIGN ENGINEER IMMEDIATELY UPON DISCOVERY OF ANY ERRORS OR INCONSISTENCIES.
- 9. ALL STORM DRAIN PIPE SHALL BE CLASS III RCP UNLESS OTHERWISE NOTED AND APPROVED BY PCD.
- 10. CONTRACTOR SHALL COORDINATE GEOTECHNICAL TESTING PER ECM STANDARDS. PAVEMENT DESIGN SHALL BE APPROVED BY EL PASO COUNTY PCD PRIOR TO PLACEMENT OF CURB AND GUTTER AND PAVEMENT.
- 11. ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE AT APPROVED CONSTRUCTION ACCESS POINTS.
- 12. SIGHT VISIBILITY TRIANGLES AS IDENTIFIED IN THE PLANS SHALL BE PROVIDED AT ALL INTERSECTIONS.

 OBSTRUCTIONS GREATER THAN 18 INCHES ABOVE FLOWLINE ARE NOT ALLOWED WITHIN SIGHT TRIANGLES.
- 13. SIGNING AND STRIPING SHALL COMPLY WITH EL PASO COUNTY PUBLIC WORKS DEPARTMENT AND MUTCD CRITERIA.
- 14. CONTRACTOR SHALL OBTAIN ANY PERMITS REQUIRED BY EL PASO COUNTY PUBLIC WORKS DEPARTMENT, INCLUDING WORK WITHIN THE RIGHT-OF-WAY AND SPECIAL TRANSPORT PERMITS.
- 15. THE LIMITS OF CONSTRUCTION SHALL REMAIN WITHIN THE PROPERTY LINE UNLESS OTHERWISE NOTED. THE OWNER/DEVELOPER SHALL OBTAIN WRITTEN PERMISSION AND EASEMENTS, WHERE REQUIRED, FROM ADJOINING PROPERTY OWNER(S) PRIOR TO ANY OFF—SITE DISTURBANCE, GRADING, OR CONSTRUCTION.

STORM SEWER NOTES:

1. CONTRACTOR SHALL USE "TYLOX SUPER SEAL" OR APPROVED EQUL JOINT GASKET FOR ALL RCP STORM SEWER JOINTS


CREEKSIDE SOUTH AT LORSON RAN STREET / STORM SEWER NOTES

DATE: NOV 30, 2020

100.063
SHEET NUMBER
C1.2

PROJECT NO.

TOTAL SHEETS: 18

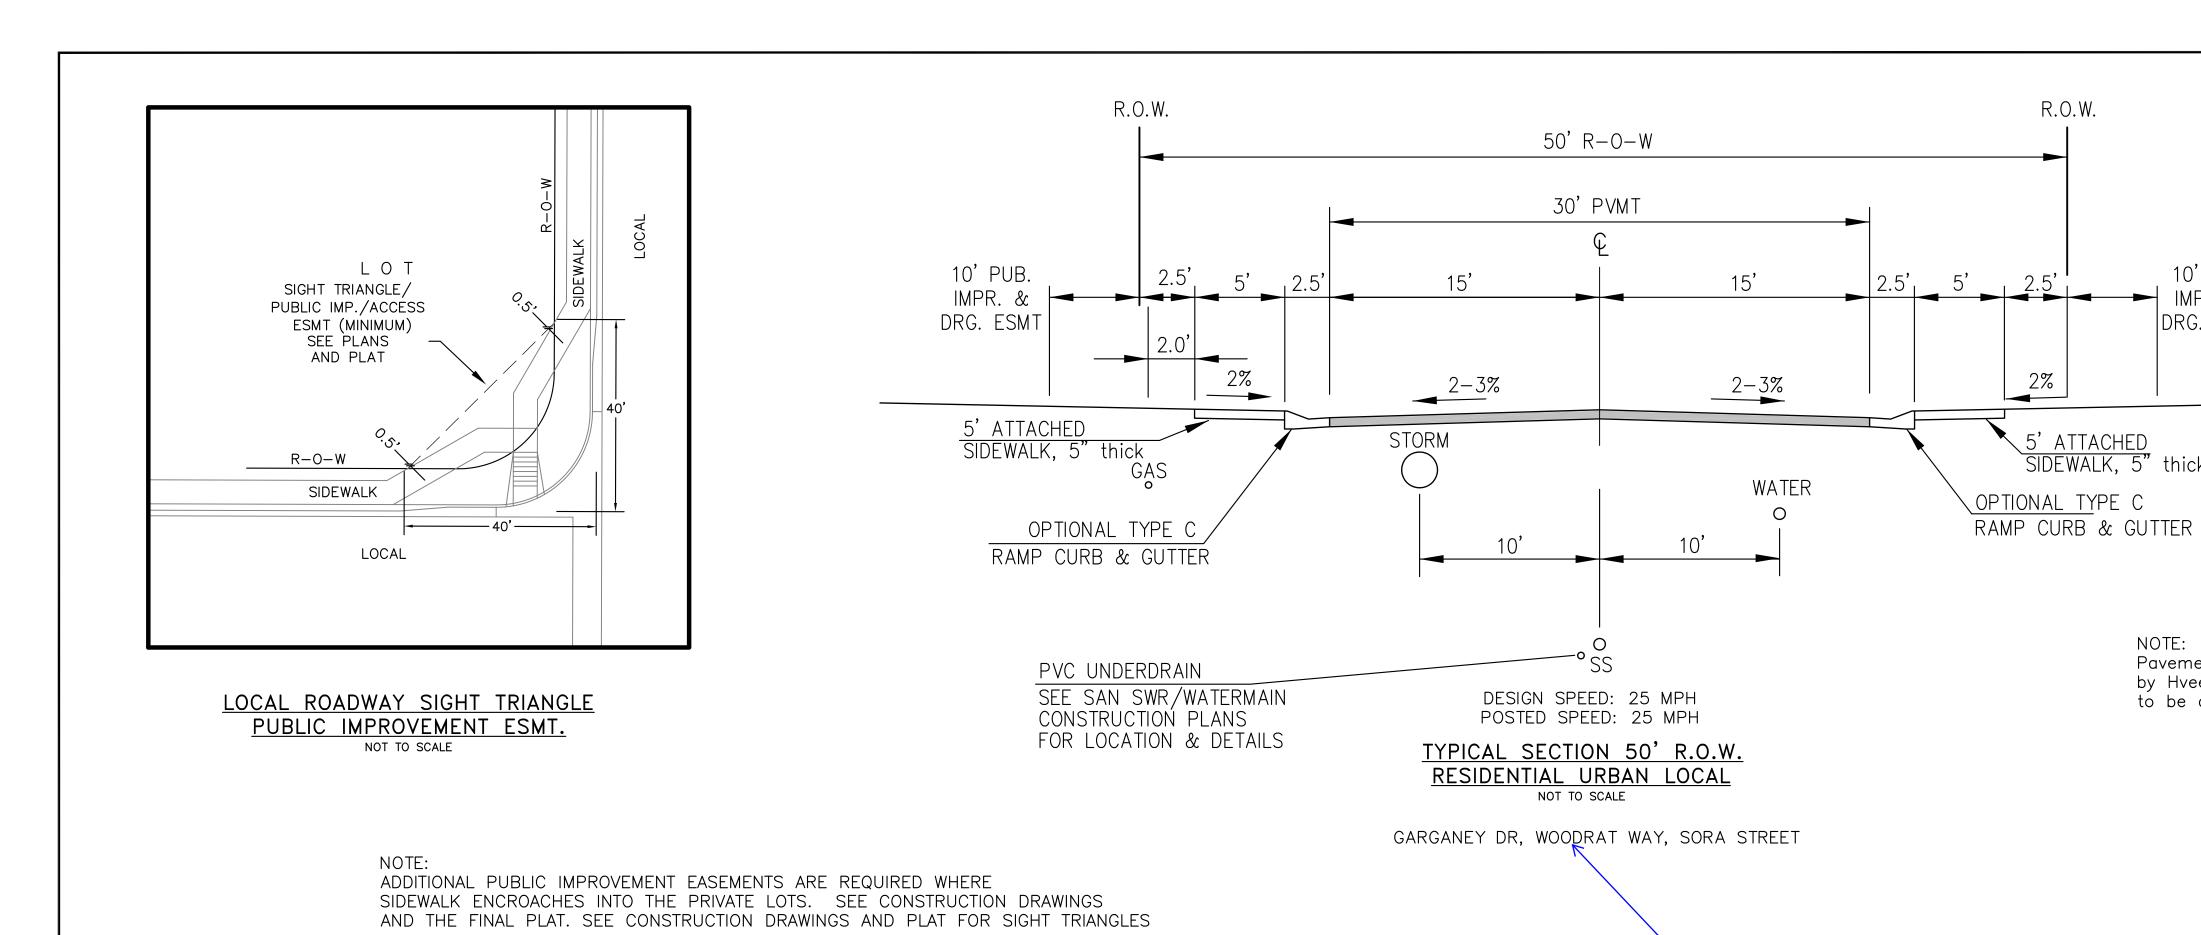

Pavement section to be determined

by Hveem analysis and design. Design to be approved by PCD Engineering

R.O.W. R.O.W. VARIES - 60' (MIN) 36' PVMT TRACT 18' TO 30' 18' 2% 2% TO 3% 1.5<u>% TO 2</u>% 5' DETACHED 5' DETACHED SIDEWALK SIDEWALK (4" THICK) SIDEWALK ÌS ATTACHED 4" THICK AT TURN LANE TYPE A CURB & GUTTER TYPE A TYPICAL SECTION 60' R.O.W. CURB & GUTTER RESIDENTIAL URBAN COLLECTOR
NOT TO SCALE DESIGN SPEED: 40 MPH POSTED SPEED: 35 MPH GRAYLING DRIVE

R.O.W.

2%

verify if this is

renamed

5' ATTACHED SIDEWALK, 5" thick

10' PUB.

DRG. ESMT

Pavement section to be determined

by Hveem analysis and design. Design to be approved by El Paso County PCD Engineering


GROUP DRAWN: RLS
DESIGNED: RLS
CHECKED: RLS

> SECTIONS **TYPICAL**

> > NOV 30, 2020

PROJECT NO. 100.063 SHEET NUMBER

C1.3 TOTAL SHEETS: 18

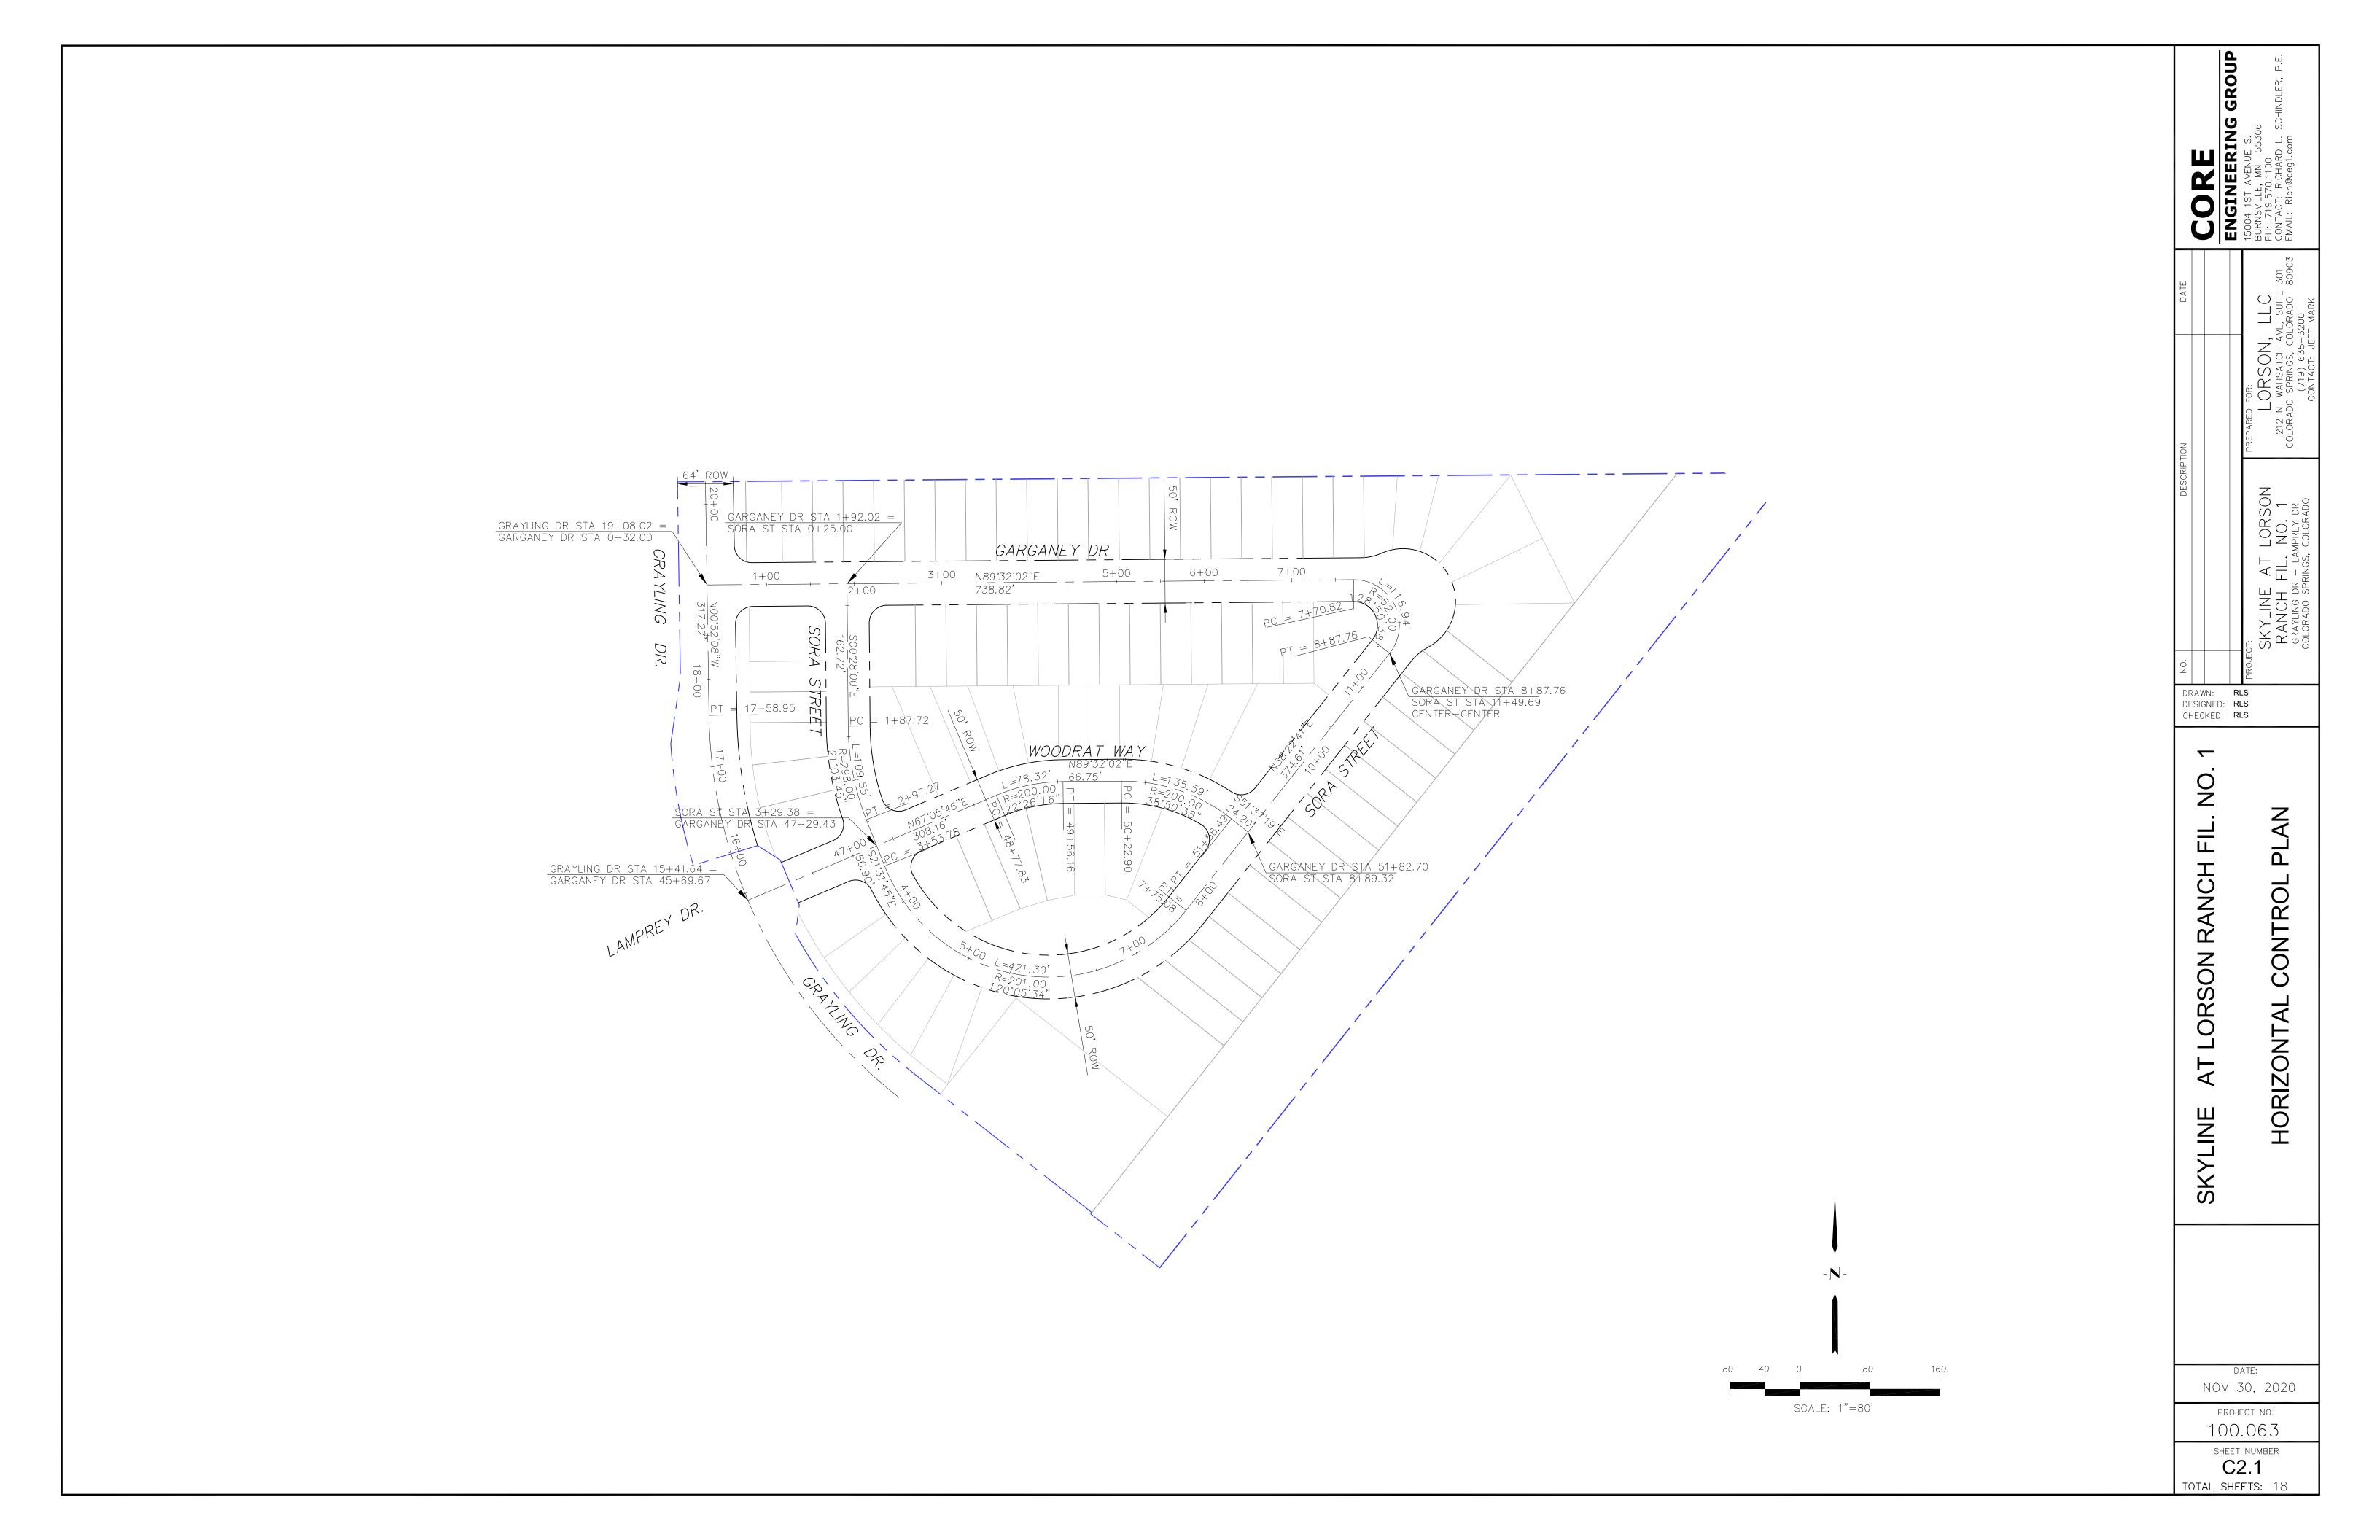



Signing and Striping Notes:

- 1. All signs and pavement markings shall be in compliance with the current Manual on Uniform Traffic Control Devices (MUTCD).
- 2. Removal of existing pavement markings shall be accomplished by a method that does not materially damage the pavement. The pavement markings shall be removed to the extent that they will not be visible under day or night conditions. At no time will it be acceptable to paint over existing pavement markings.
- 3. Any deviation from the striping and signing plan shall be approved by El Paso County Planning and Community Development. All signs shown on the signing and striping plan shall be new signs. Existing signs may remain or be reused if they meet current El Paso County Public Works Department and MUTCD standards.
- 4. Street name and regulatory stop signs shall be on the same post at intersections.
- 5. All removed signs shall be disposed of in a proper manner by the contractor.
- 6. All street name signs shall have 'D' series letters, with local roadway signs being 4' upper—lower case lettering on 8' blank and non—local roadway signs being 6' lettering, upper—lower case on 12" blank, with a white border that is not recessed. Multi—lane roadways with speed limits of 40 mph or higher shall have 8" upper—lower case lettering on 18" blank with a white border that is not recessed. The width of the non-recessed white borders shall match page 255 of the 2012 MUTCD "Standard Highway Signs"
- 7. All traffic signs shall have a minimum High Intensity Prismatic grade sheeting.
 8. All local residential street signs shall be mounted on a 1.75" x 1.75" square tube sign post and stub post base. For other applications, refer to the CDOT Standard S—614—8 regarding use of the P2 tubular steel post slipbase design.
- 9. All signs shall be single sheet aluminum with 0.100" minimum thickness. 10. All limit lines/stop lines, crosswalk lines, pavement legends, and arrows shall be a minimum 125 mil thickness preformed thermoplastic pavement markings with tapered
- leading edges per CDOT Standard S-627-1. Word and symbol markings shall be the narrow type. Stop bars shall be 24" in width. Crosswalks lines shall be 12" wide and 8'
- 11. All longitudinal lines shall be a minimum 15mil thickness epoxy paint. All non-local residential roadways shall include both right and left edge line striping and any additional striping as required by CDOT S-627-1.
- 12. The contractor shall notify El Paso County Planning and Community Development (719) 520—6819 prior to and upon completion of signing and striping.
- 13. The contractor shall obtain a work in the right of way permit from the El Paso County Public Works Department prior to any signage or striping work within an existing El Paso County roadway.


Notes:

- 1. Contractor must submit shop drawings to the engineer and to the county for approval prior to ordering signs
- 2. Sign locations shall be in accordance with MUTCD standards and with CDOT S-614-1 details.

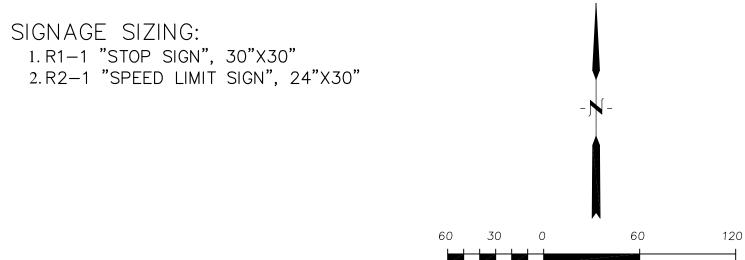


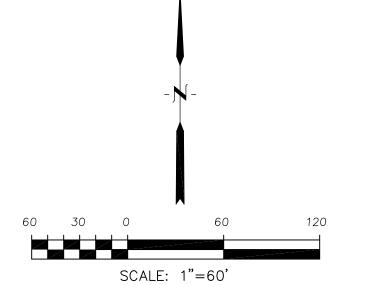



ENGINEERING (15004 1ST AVENUE S. BURNSVILLE, MN 55306 PH: 719.570.1100 CONTACT: RICHARD L. SCHIIEMAIL: Rich@ceg1.com

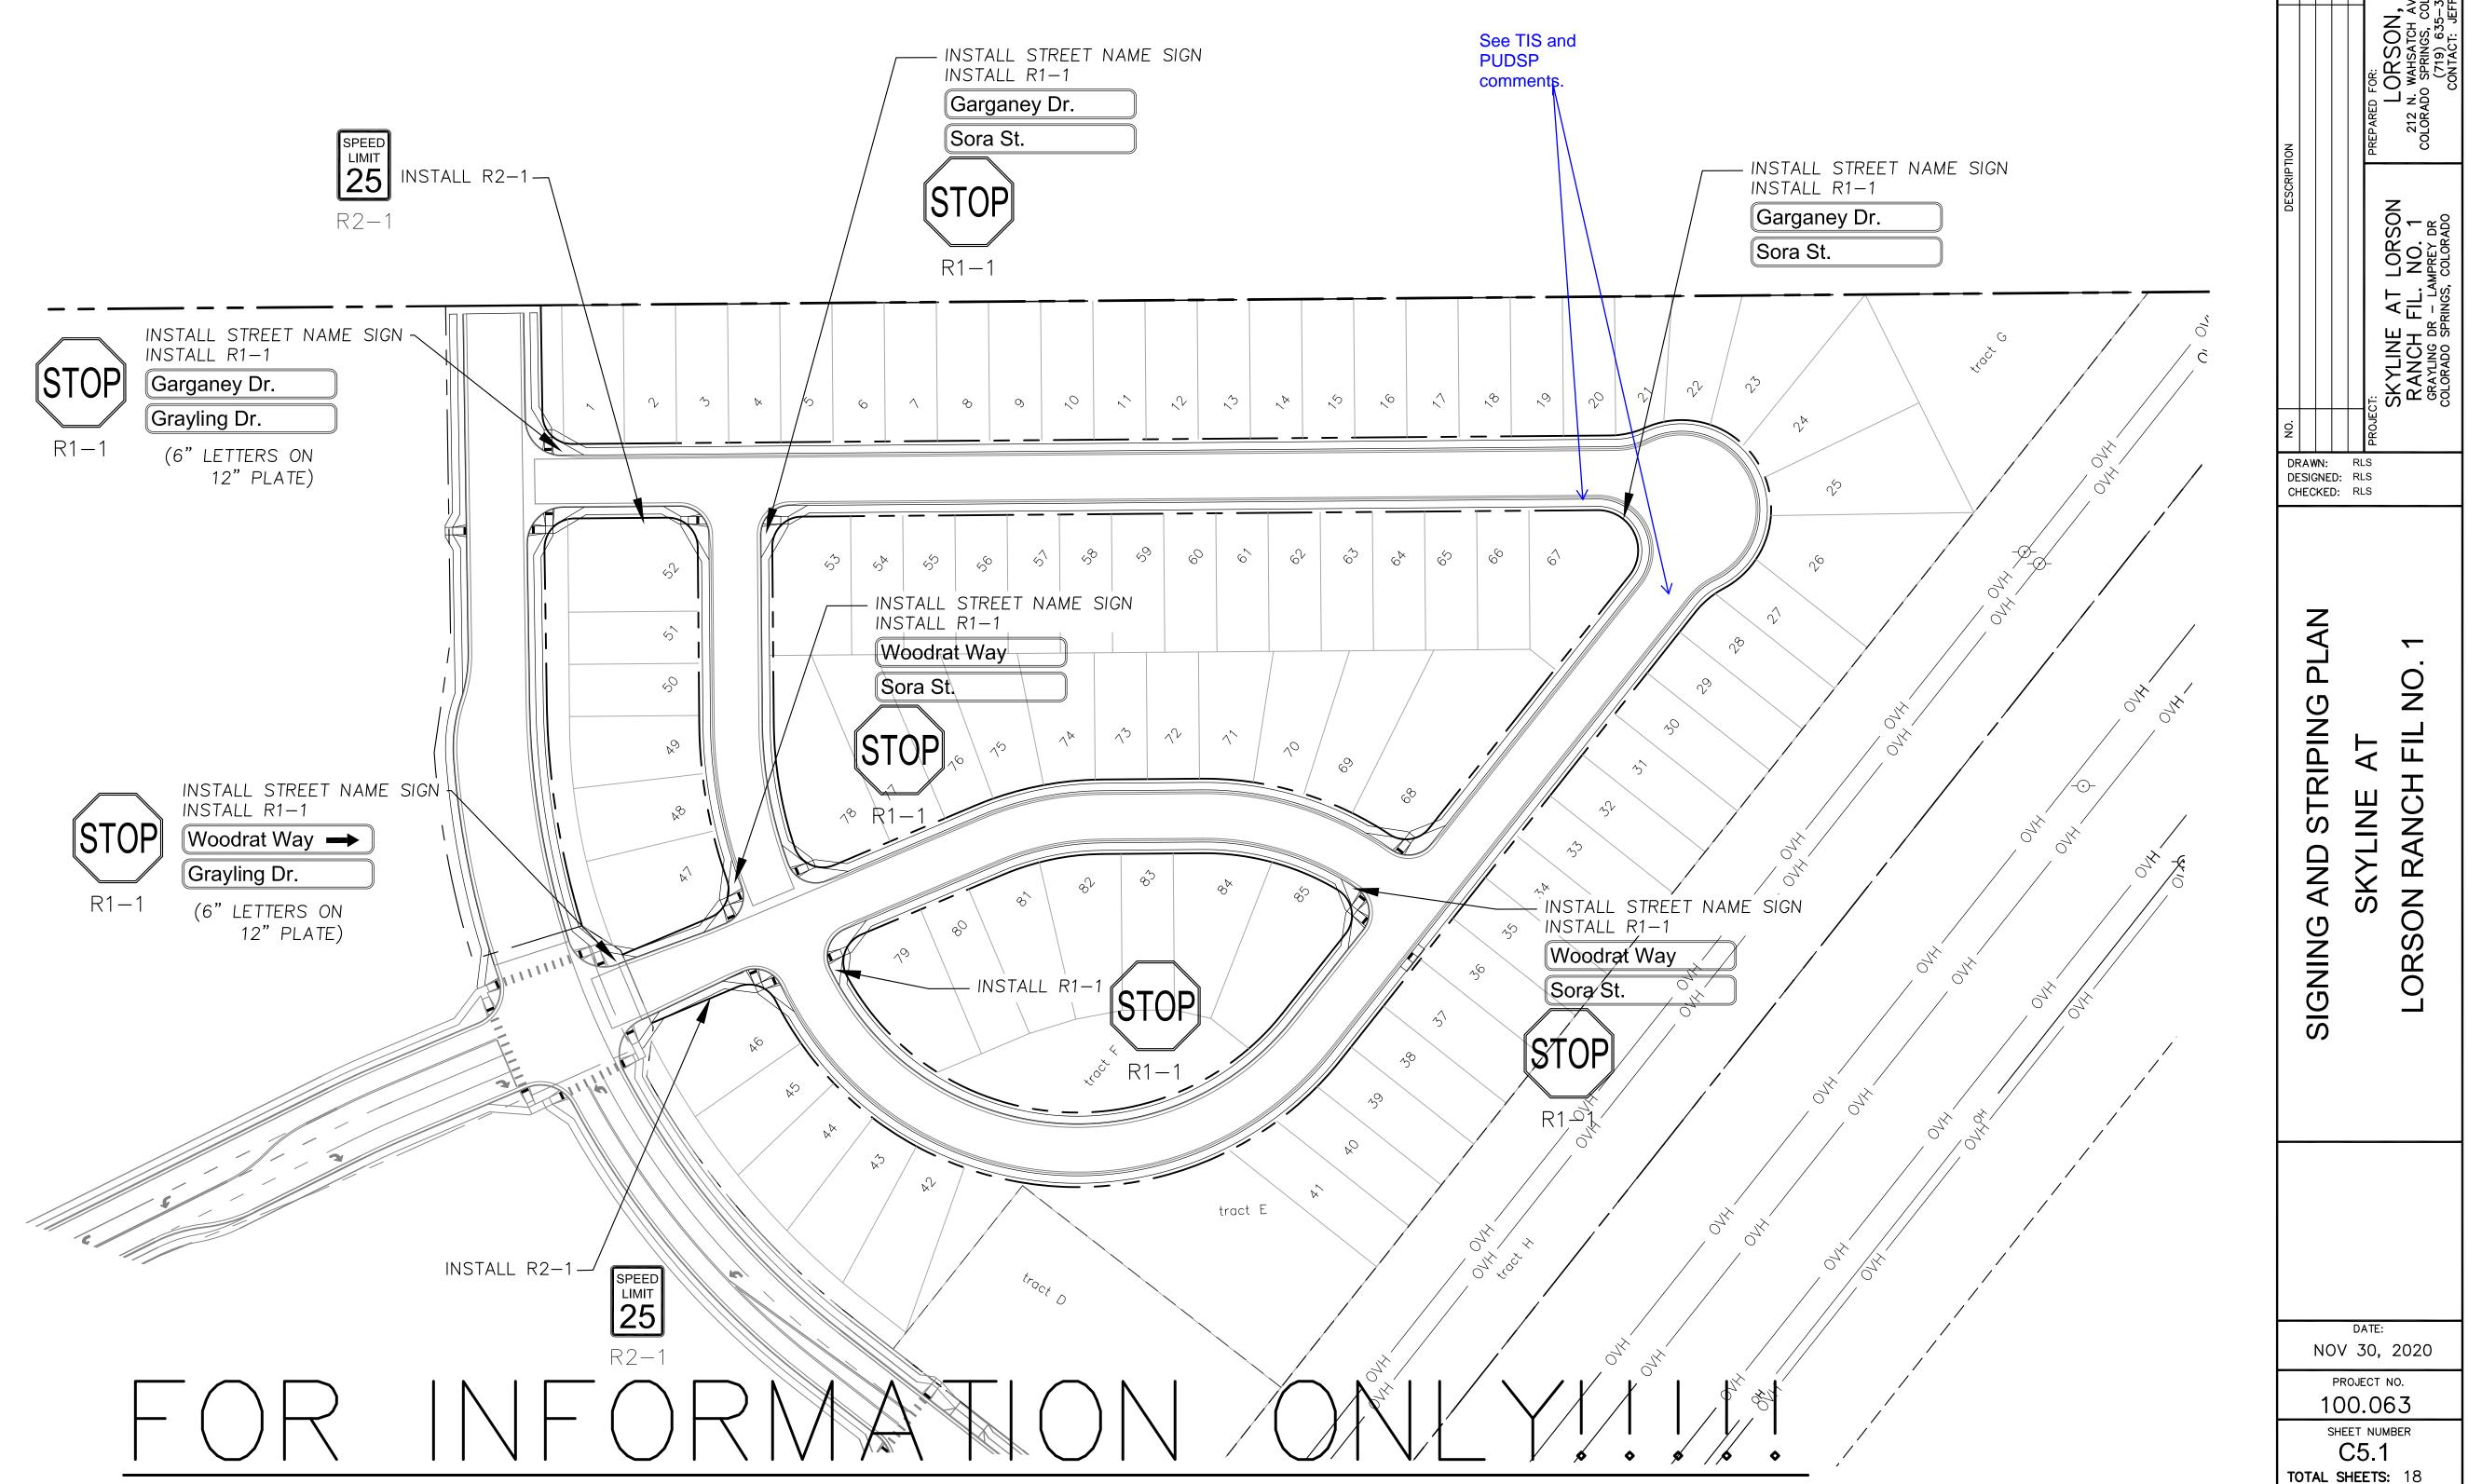



GROUP - END CONSTRUCTION INSTALL 2-CDOT TYPE 3F BARRICADES ON SKIDS WITH R11-2 "ROAD CLOSED" SIGN, 48"X30" DR AYLING **√**> $\langle \rangle$ \triangleright 0) 90 GARGANEY DR WHITE CROSSWALK LINES -12" WIDE, 6' LONG, 6' O.C. STA 18+72.00 — ND 4" DOUBLE YELLOW (6.0'RT/LT) STA 18+28.16, 6.00'LT STREE END 4" DASHED LINE ANGLE POINT 4" DOUBLE YELLOW INSTALL R3-7R ~ Only limited SIGN (30"X30") striping is needed, if any. Maybe just double-yellow. STA 17+89, 18.00'LT -DRAWN: RLS DESIGNED: RLS END 4" DASHED LINE CHECKED: RLS See TIS. STA 16+97.73 — BEGIN 4" DOUBLE YELLOW (6.0'RT) STA 16+76.81, 6.00'LT & 18.00'LT — END 6" SOLID WHITE LANE LINES DR BEGIN 4" DASHED WHITE LINE (3' PAINT, 9' SKIP) STRIPING PLAN SIGN (54"X30") (WHITE, 3 EACH) THERMOPLASTIC ARROW -(WHITE, 3 EACH) END 4" DOUBLE YELLOW LINE BEGIN 6" WHITE LANE LINE (6.0'LT, 18.0'LT) BEGIN 4" DOUBLE YELLOW (6.0'RT) - STA 46+10.30 (4.40'LT, 5.00'RT) BEGIN 4" DOUBLE YELLOW LINE **ං**ජ THERMOPLASTIC ARROW -(WHITE, 2 EACH) GRAYLING SIGNING -WHITE STOP BAR 12" WIDE, 23' LONG THERMOPLASTIC ARROW - (WHITE, 2 EACH) $C_{\mathcal{A}}$ EXISTING — STOP SIGN LAMPREY DRIVE \Box INSTALL R3-8H —/ SIGN (54"X30") DATE: NOV 30, 2020 12' THRU -12'-MEDIAN PROJECT NO. 100.063 SHEET NUMBER SCALE: 1"=50' C5.2 TOTAL SHEETS: 18 CTA 77 . 40 47

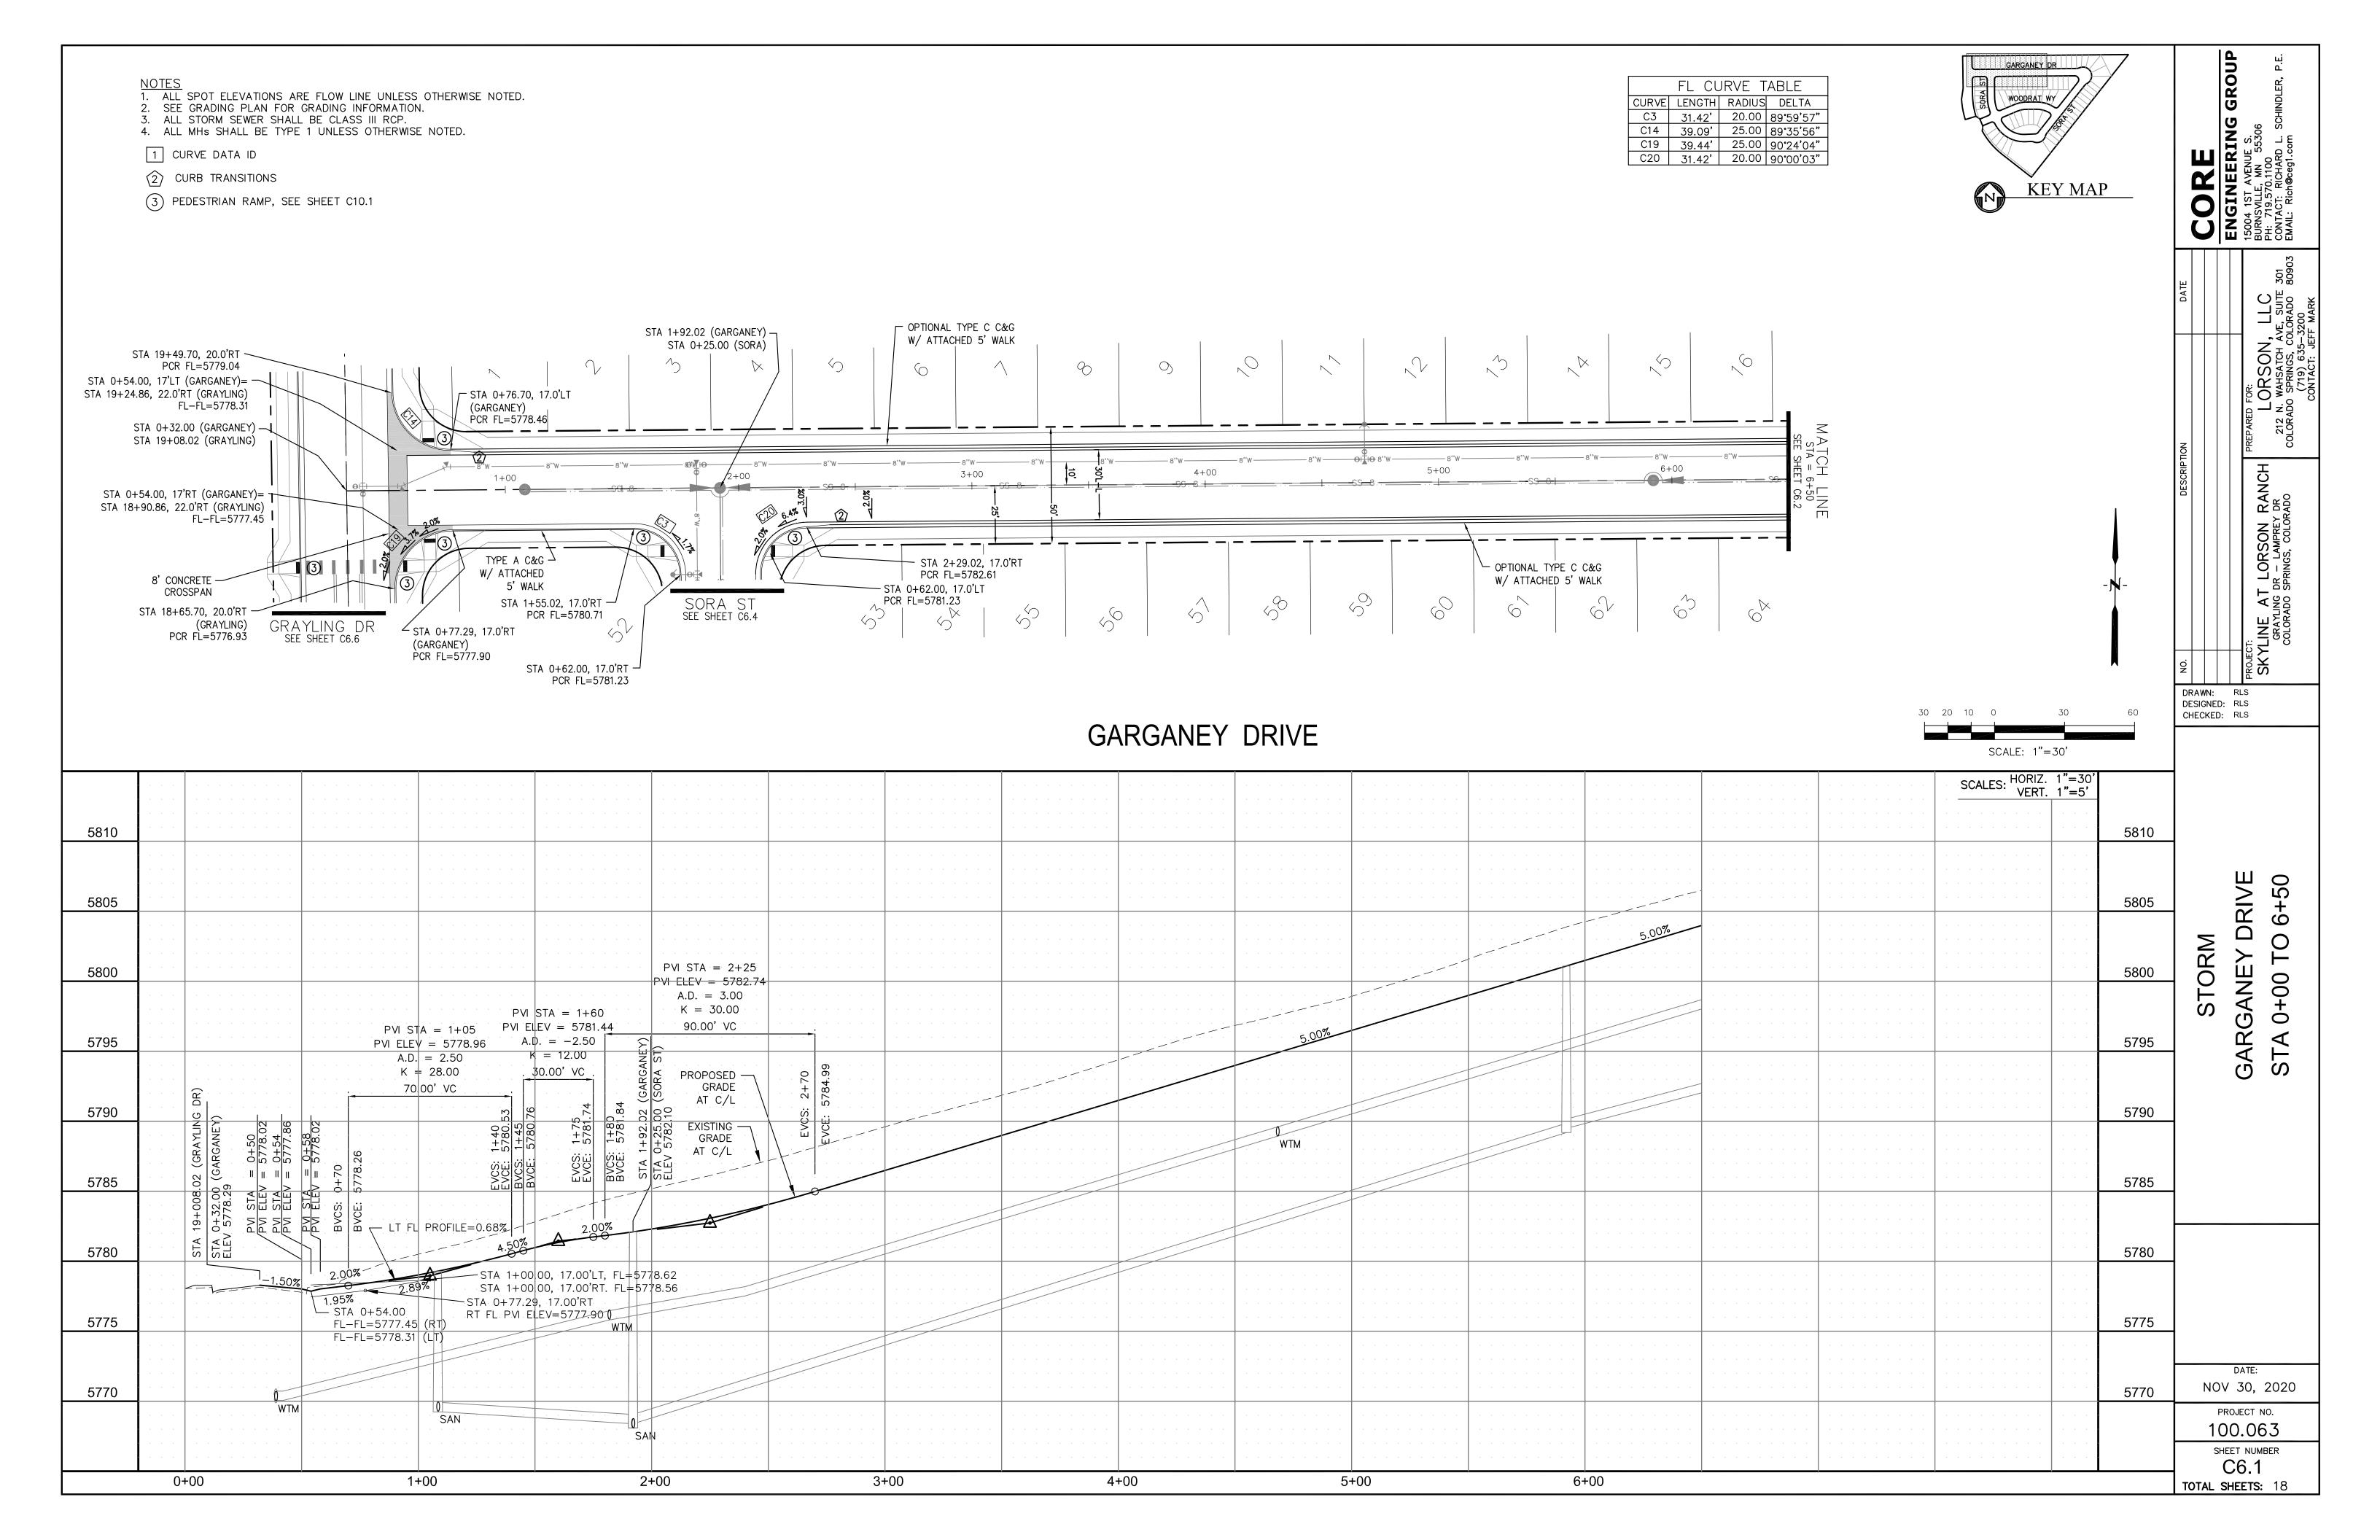


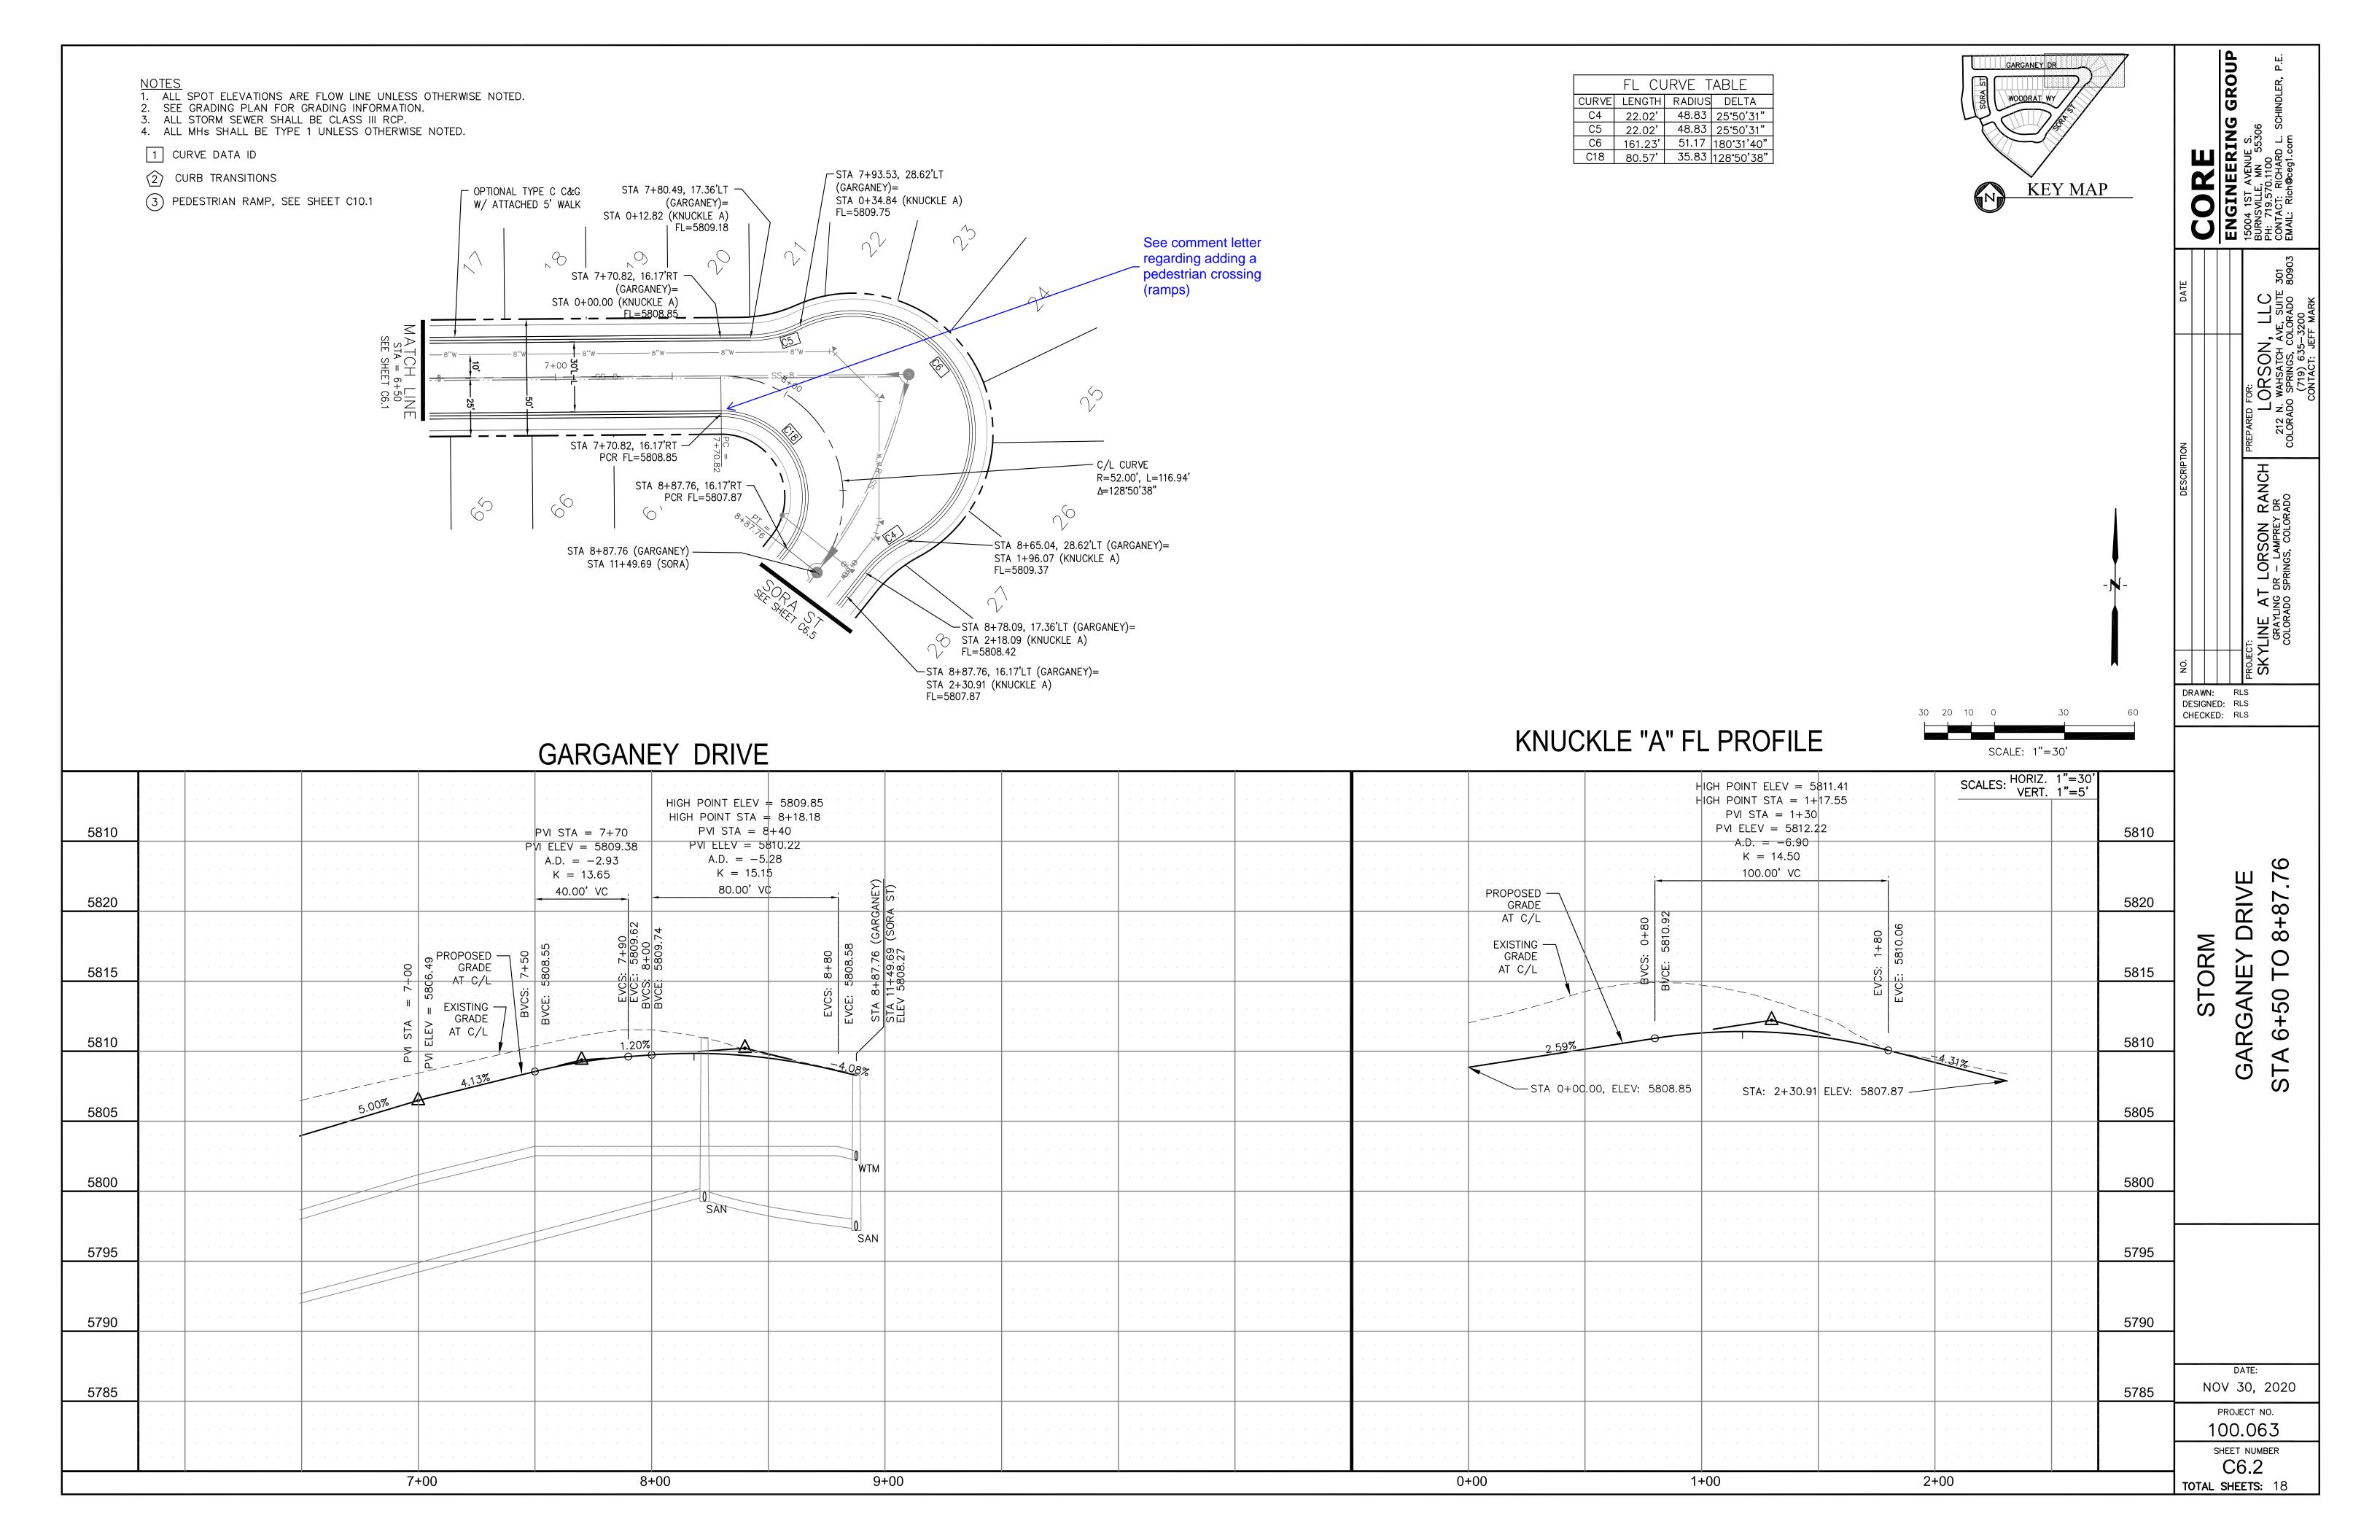


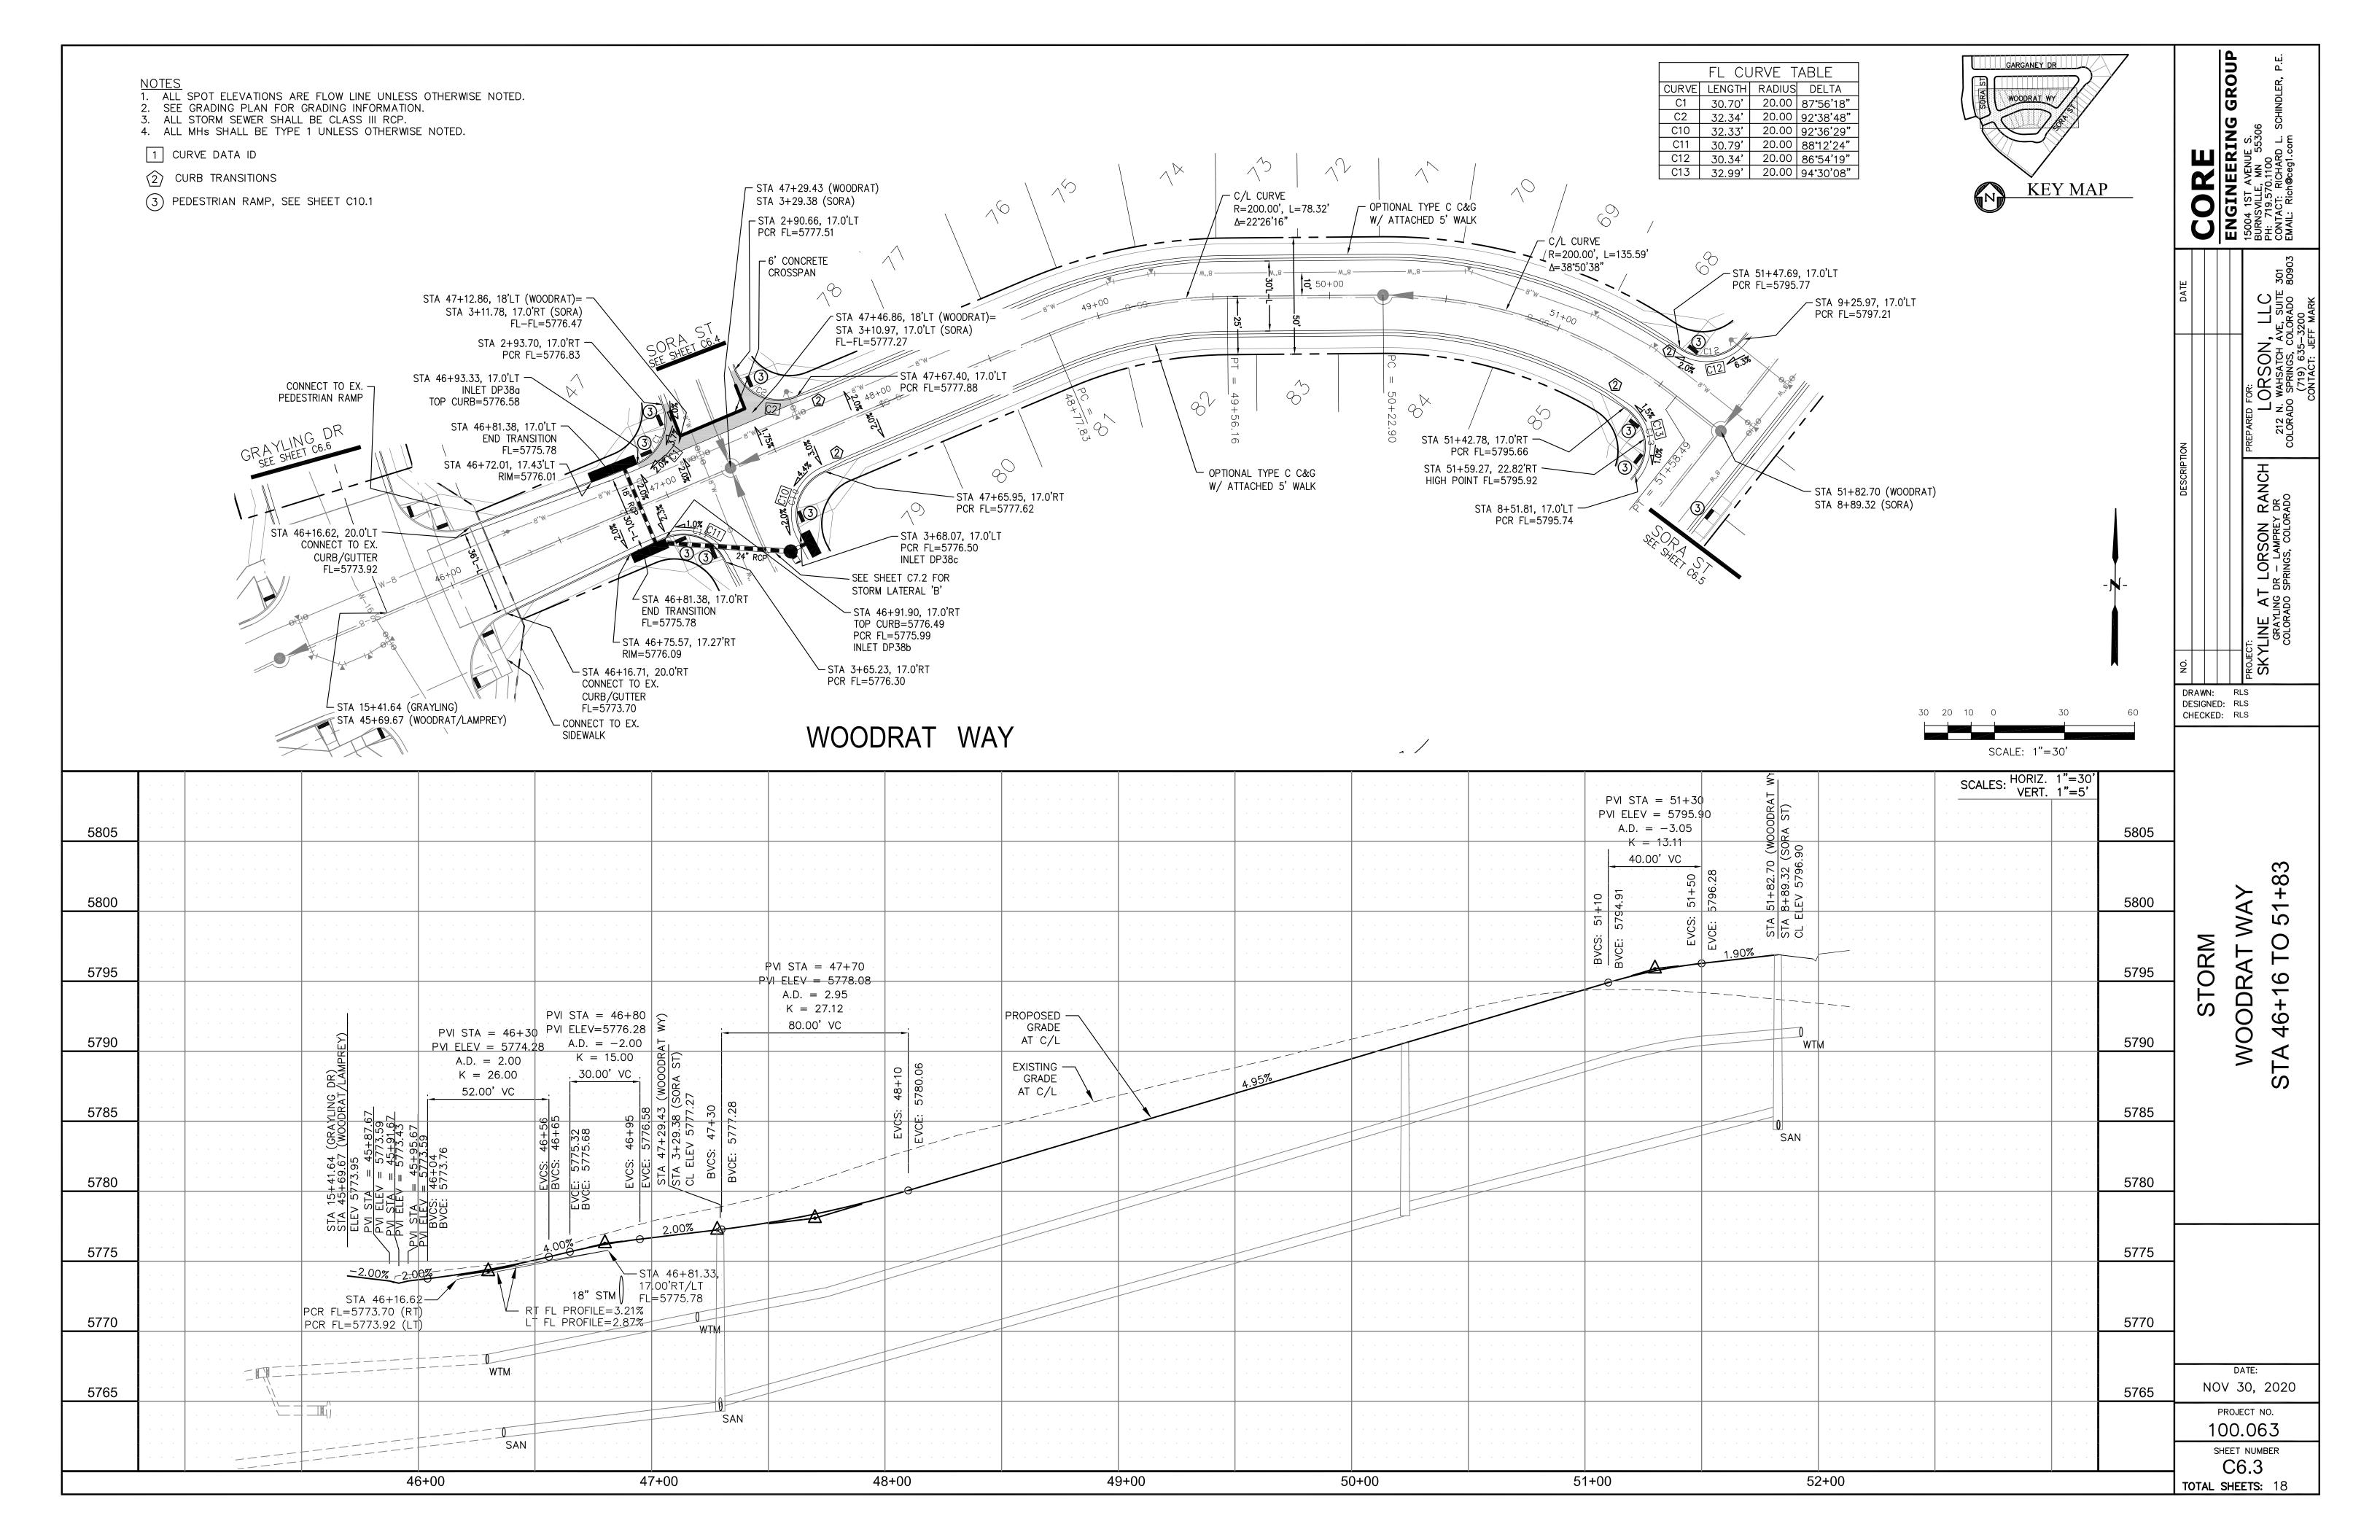


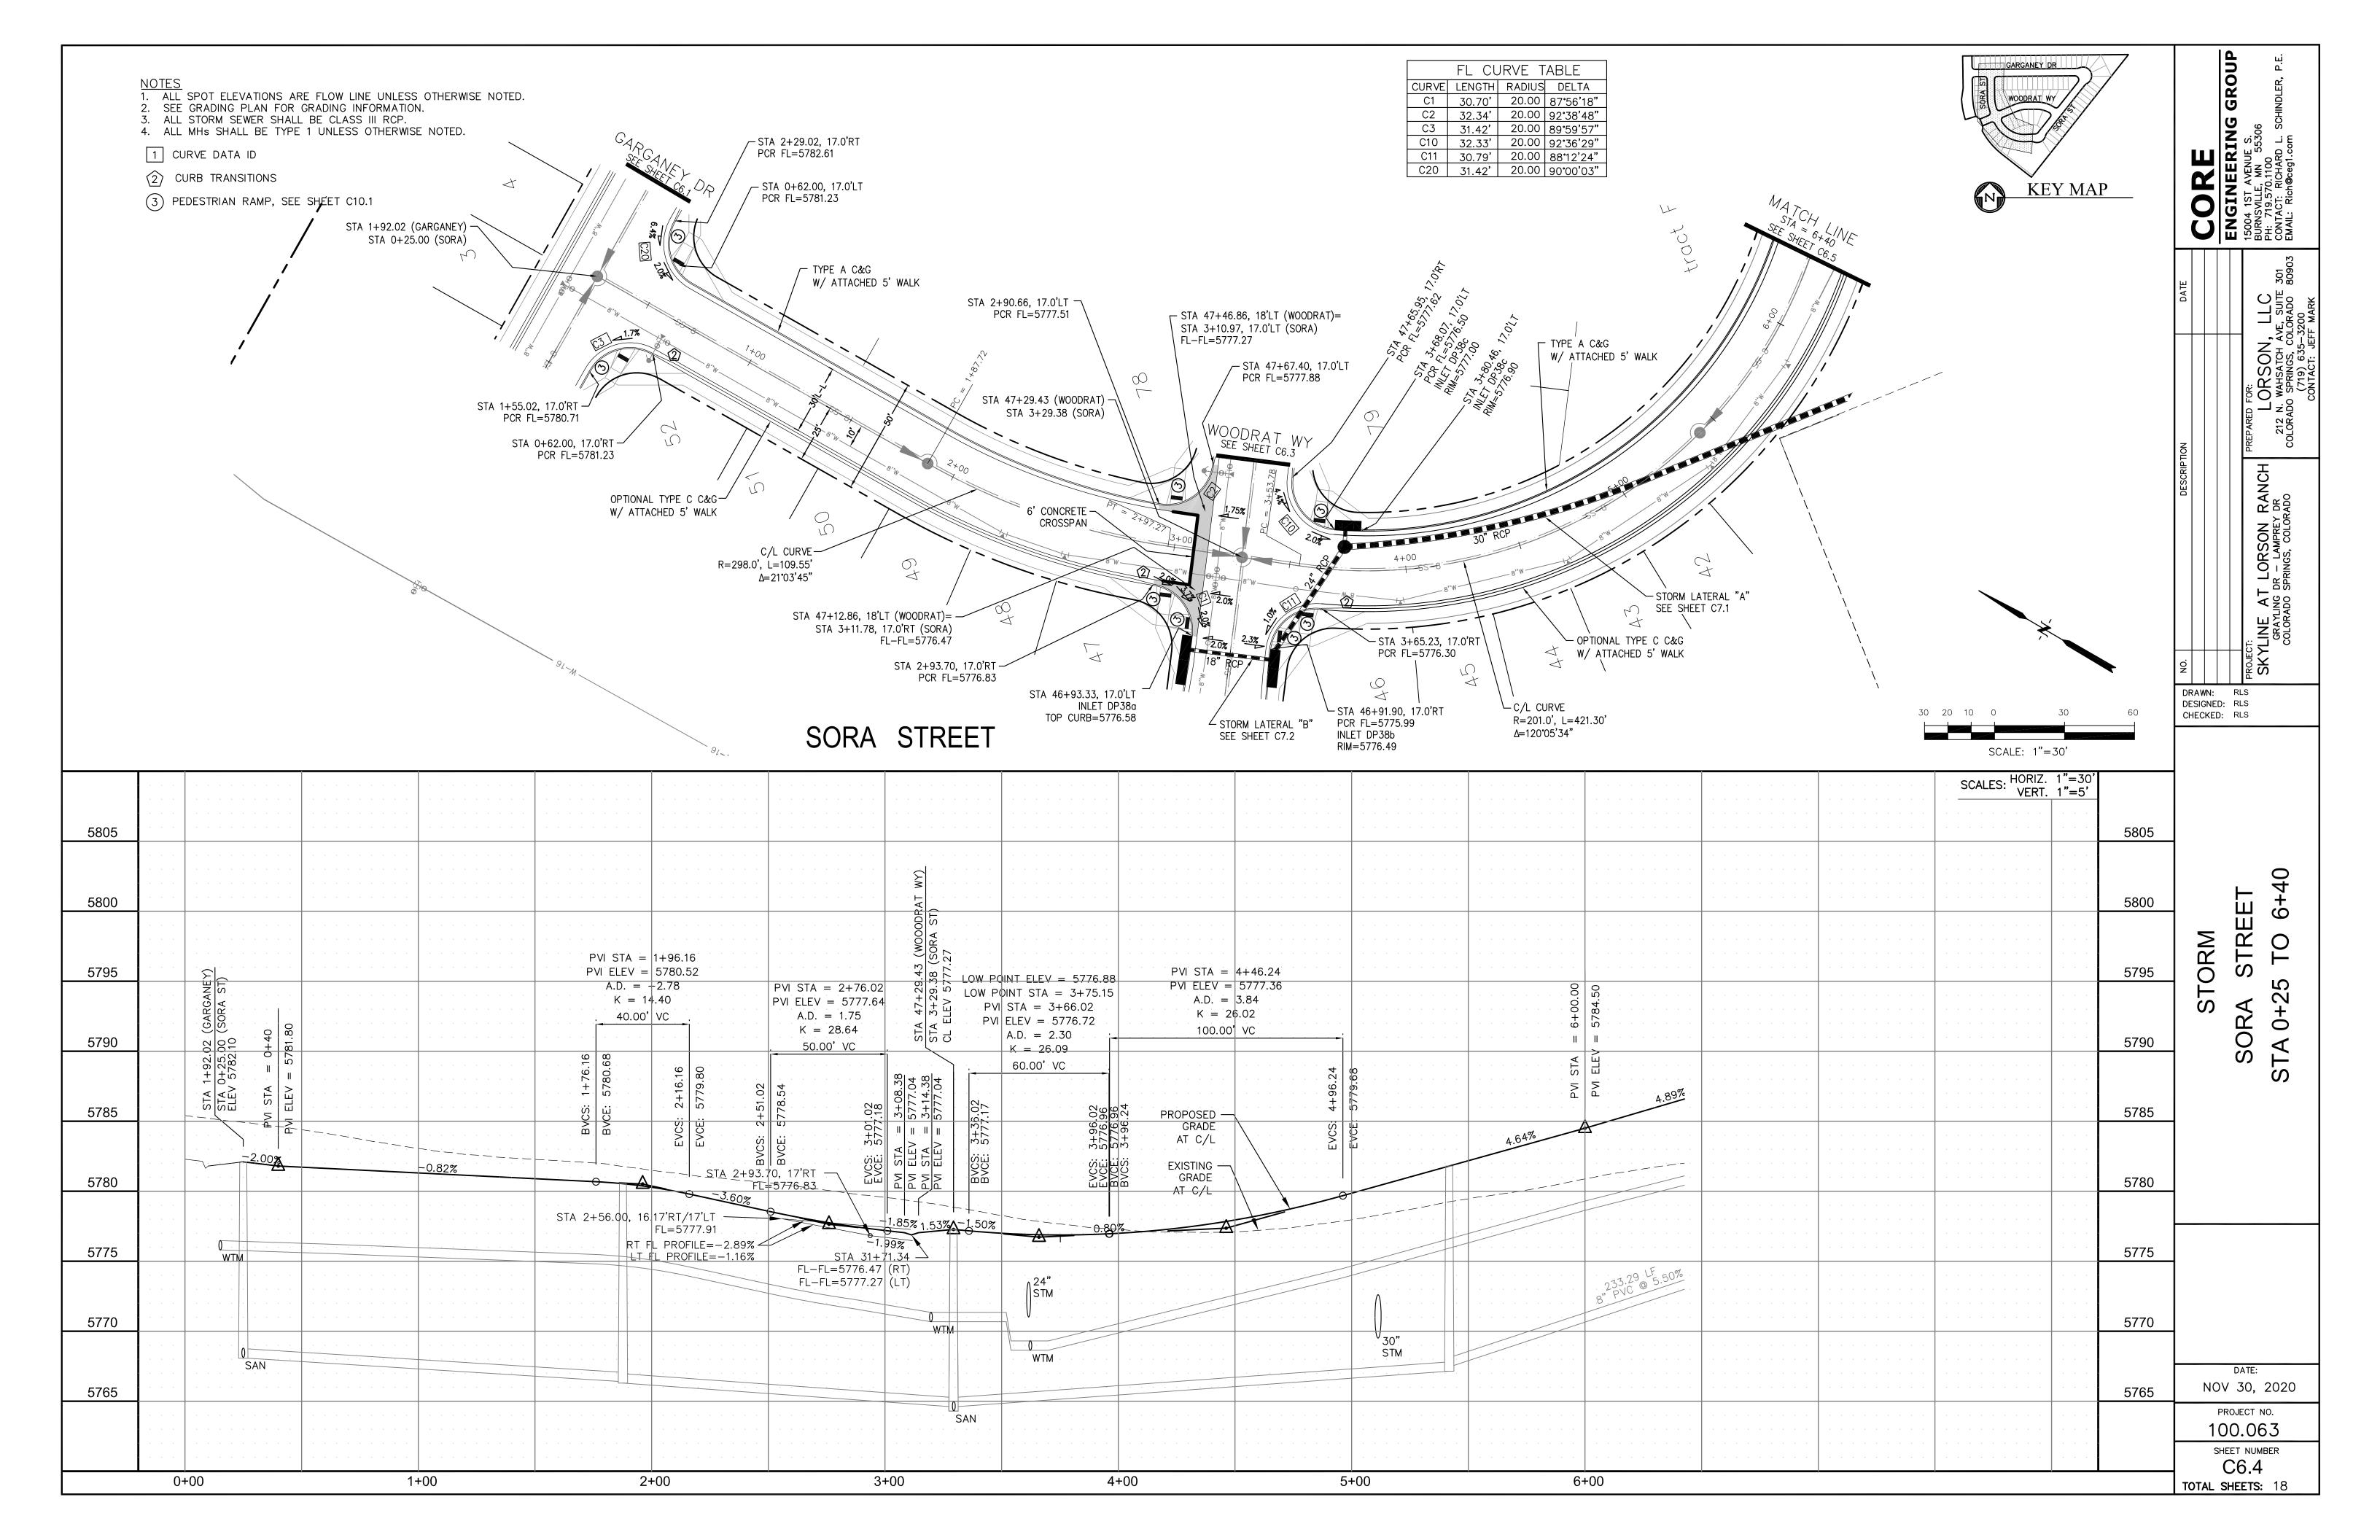


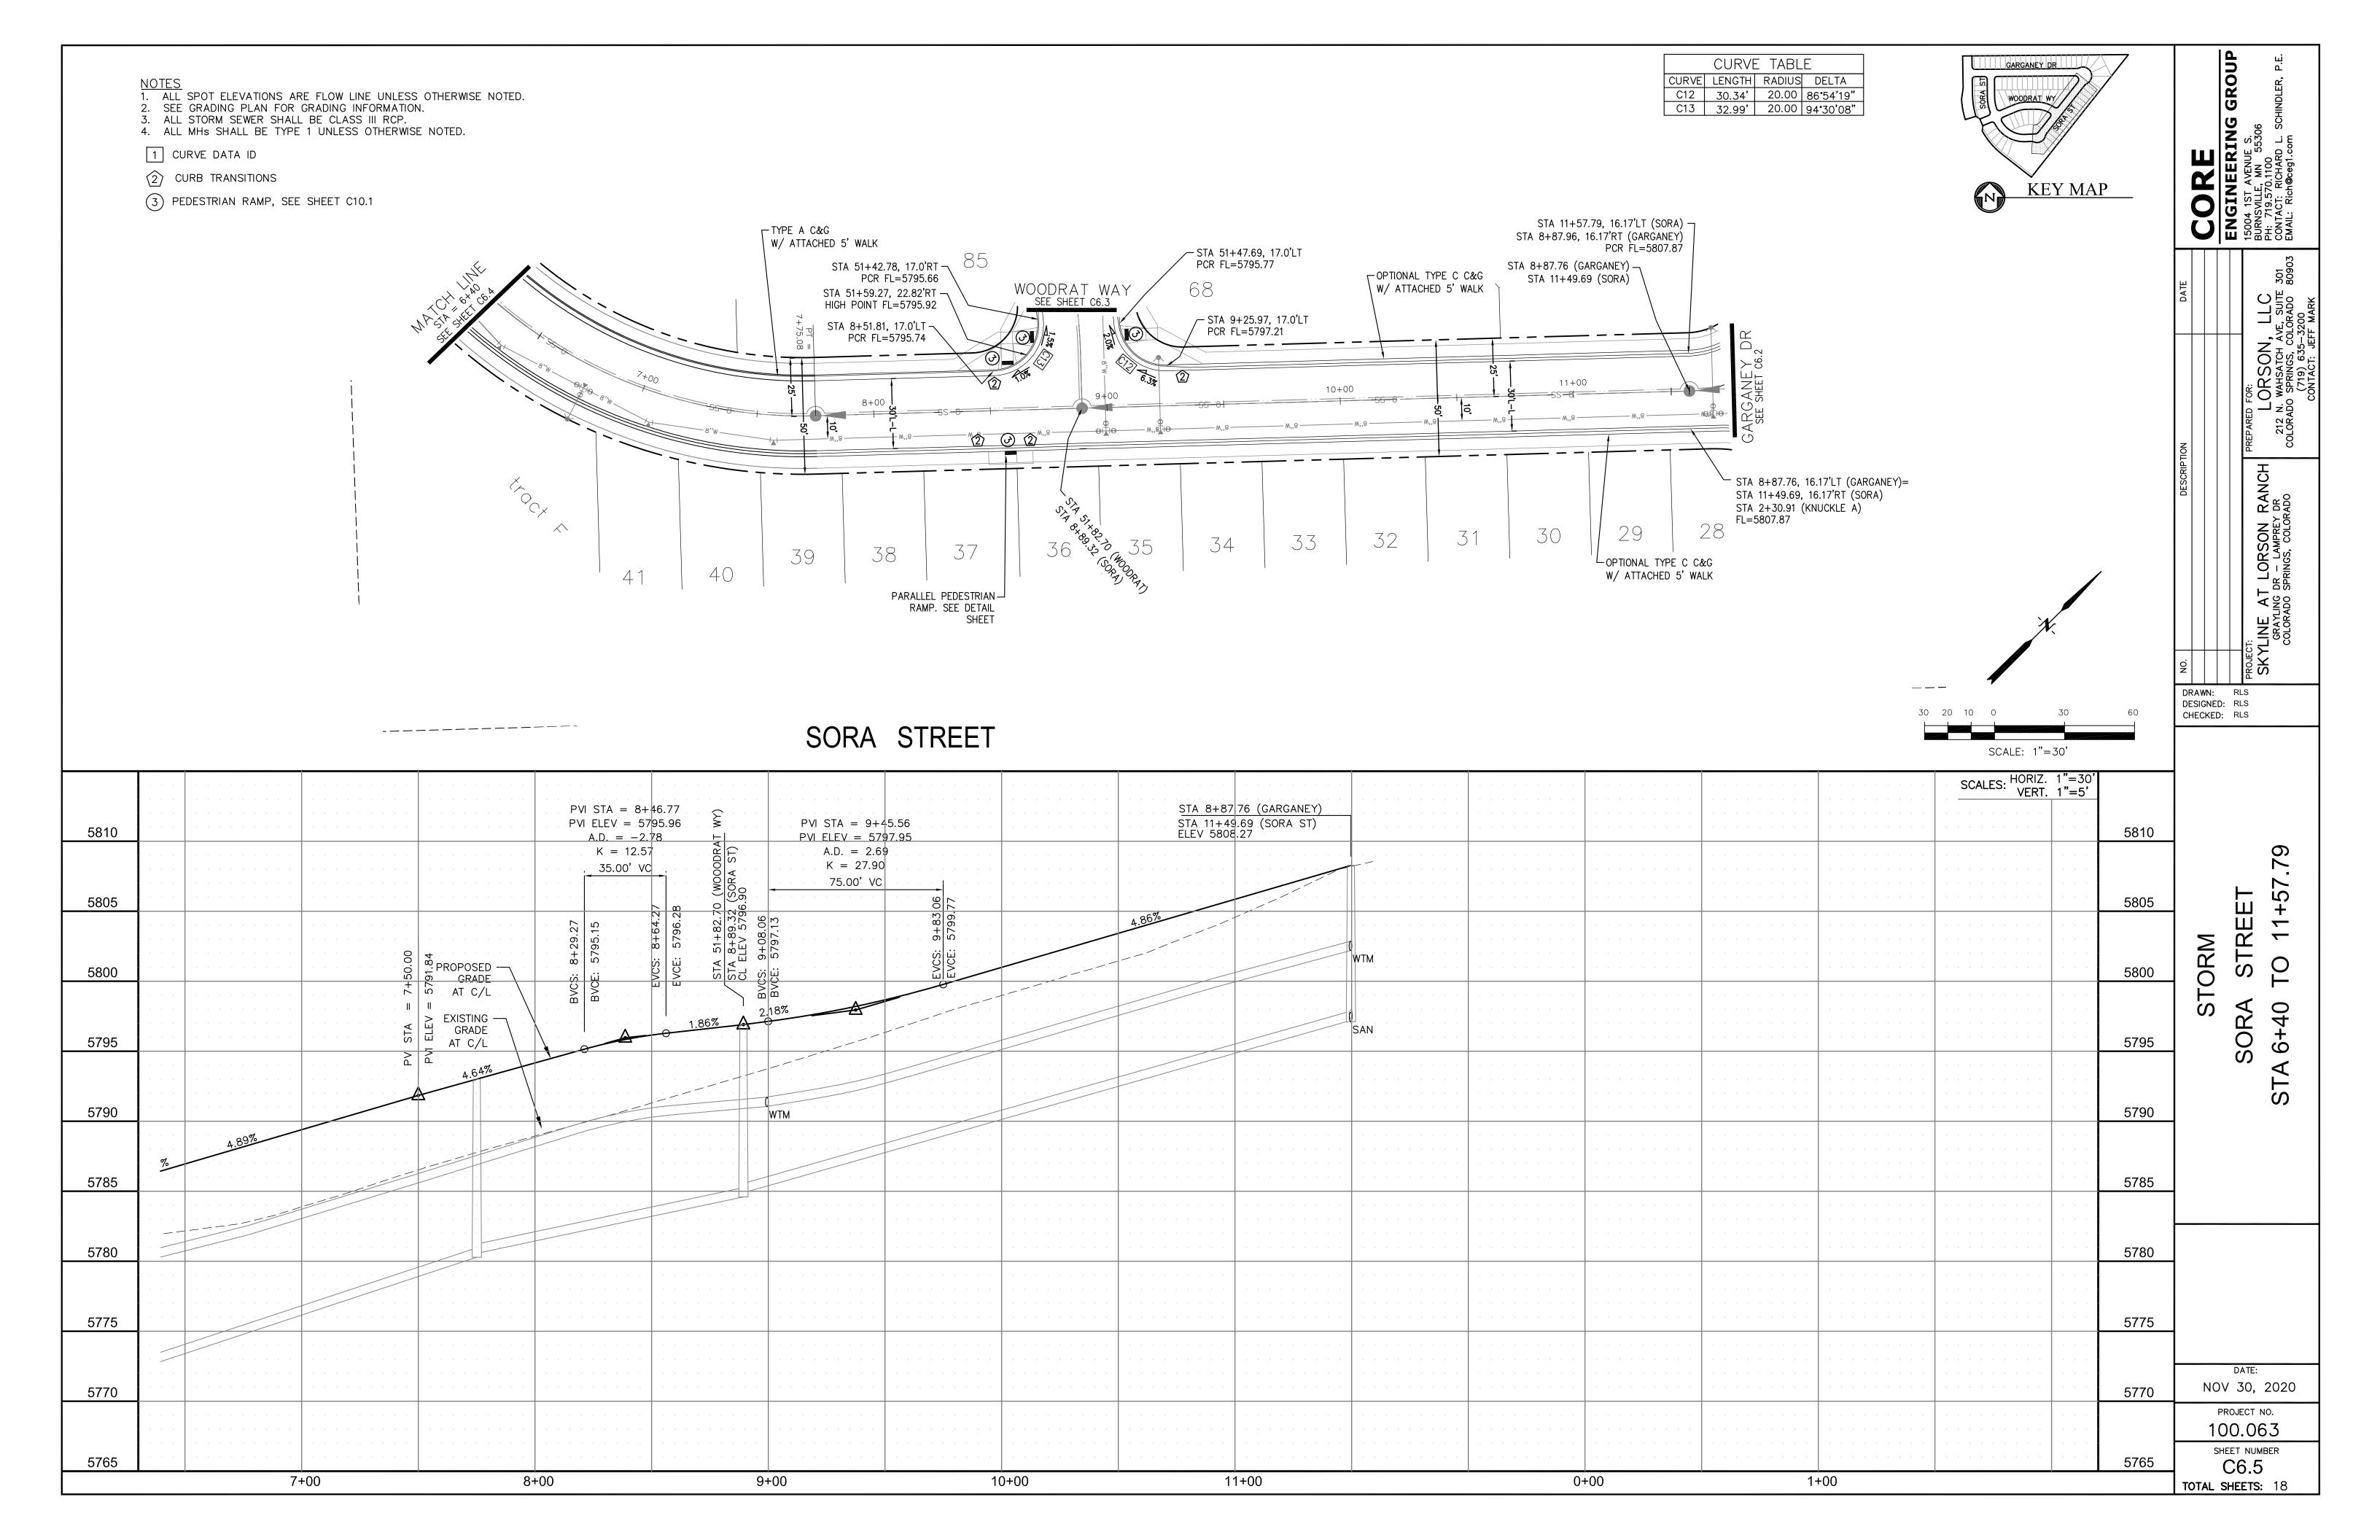


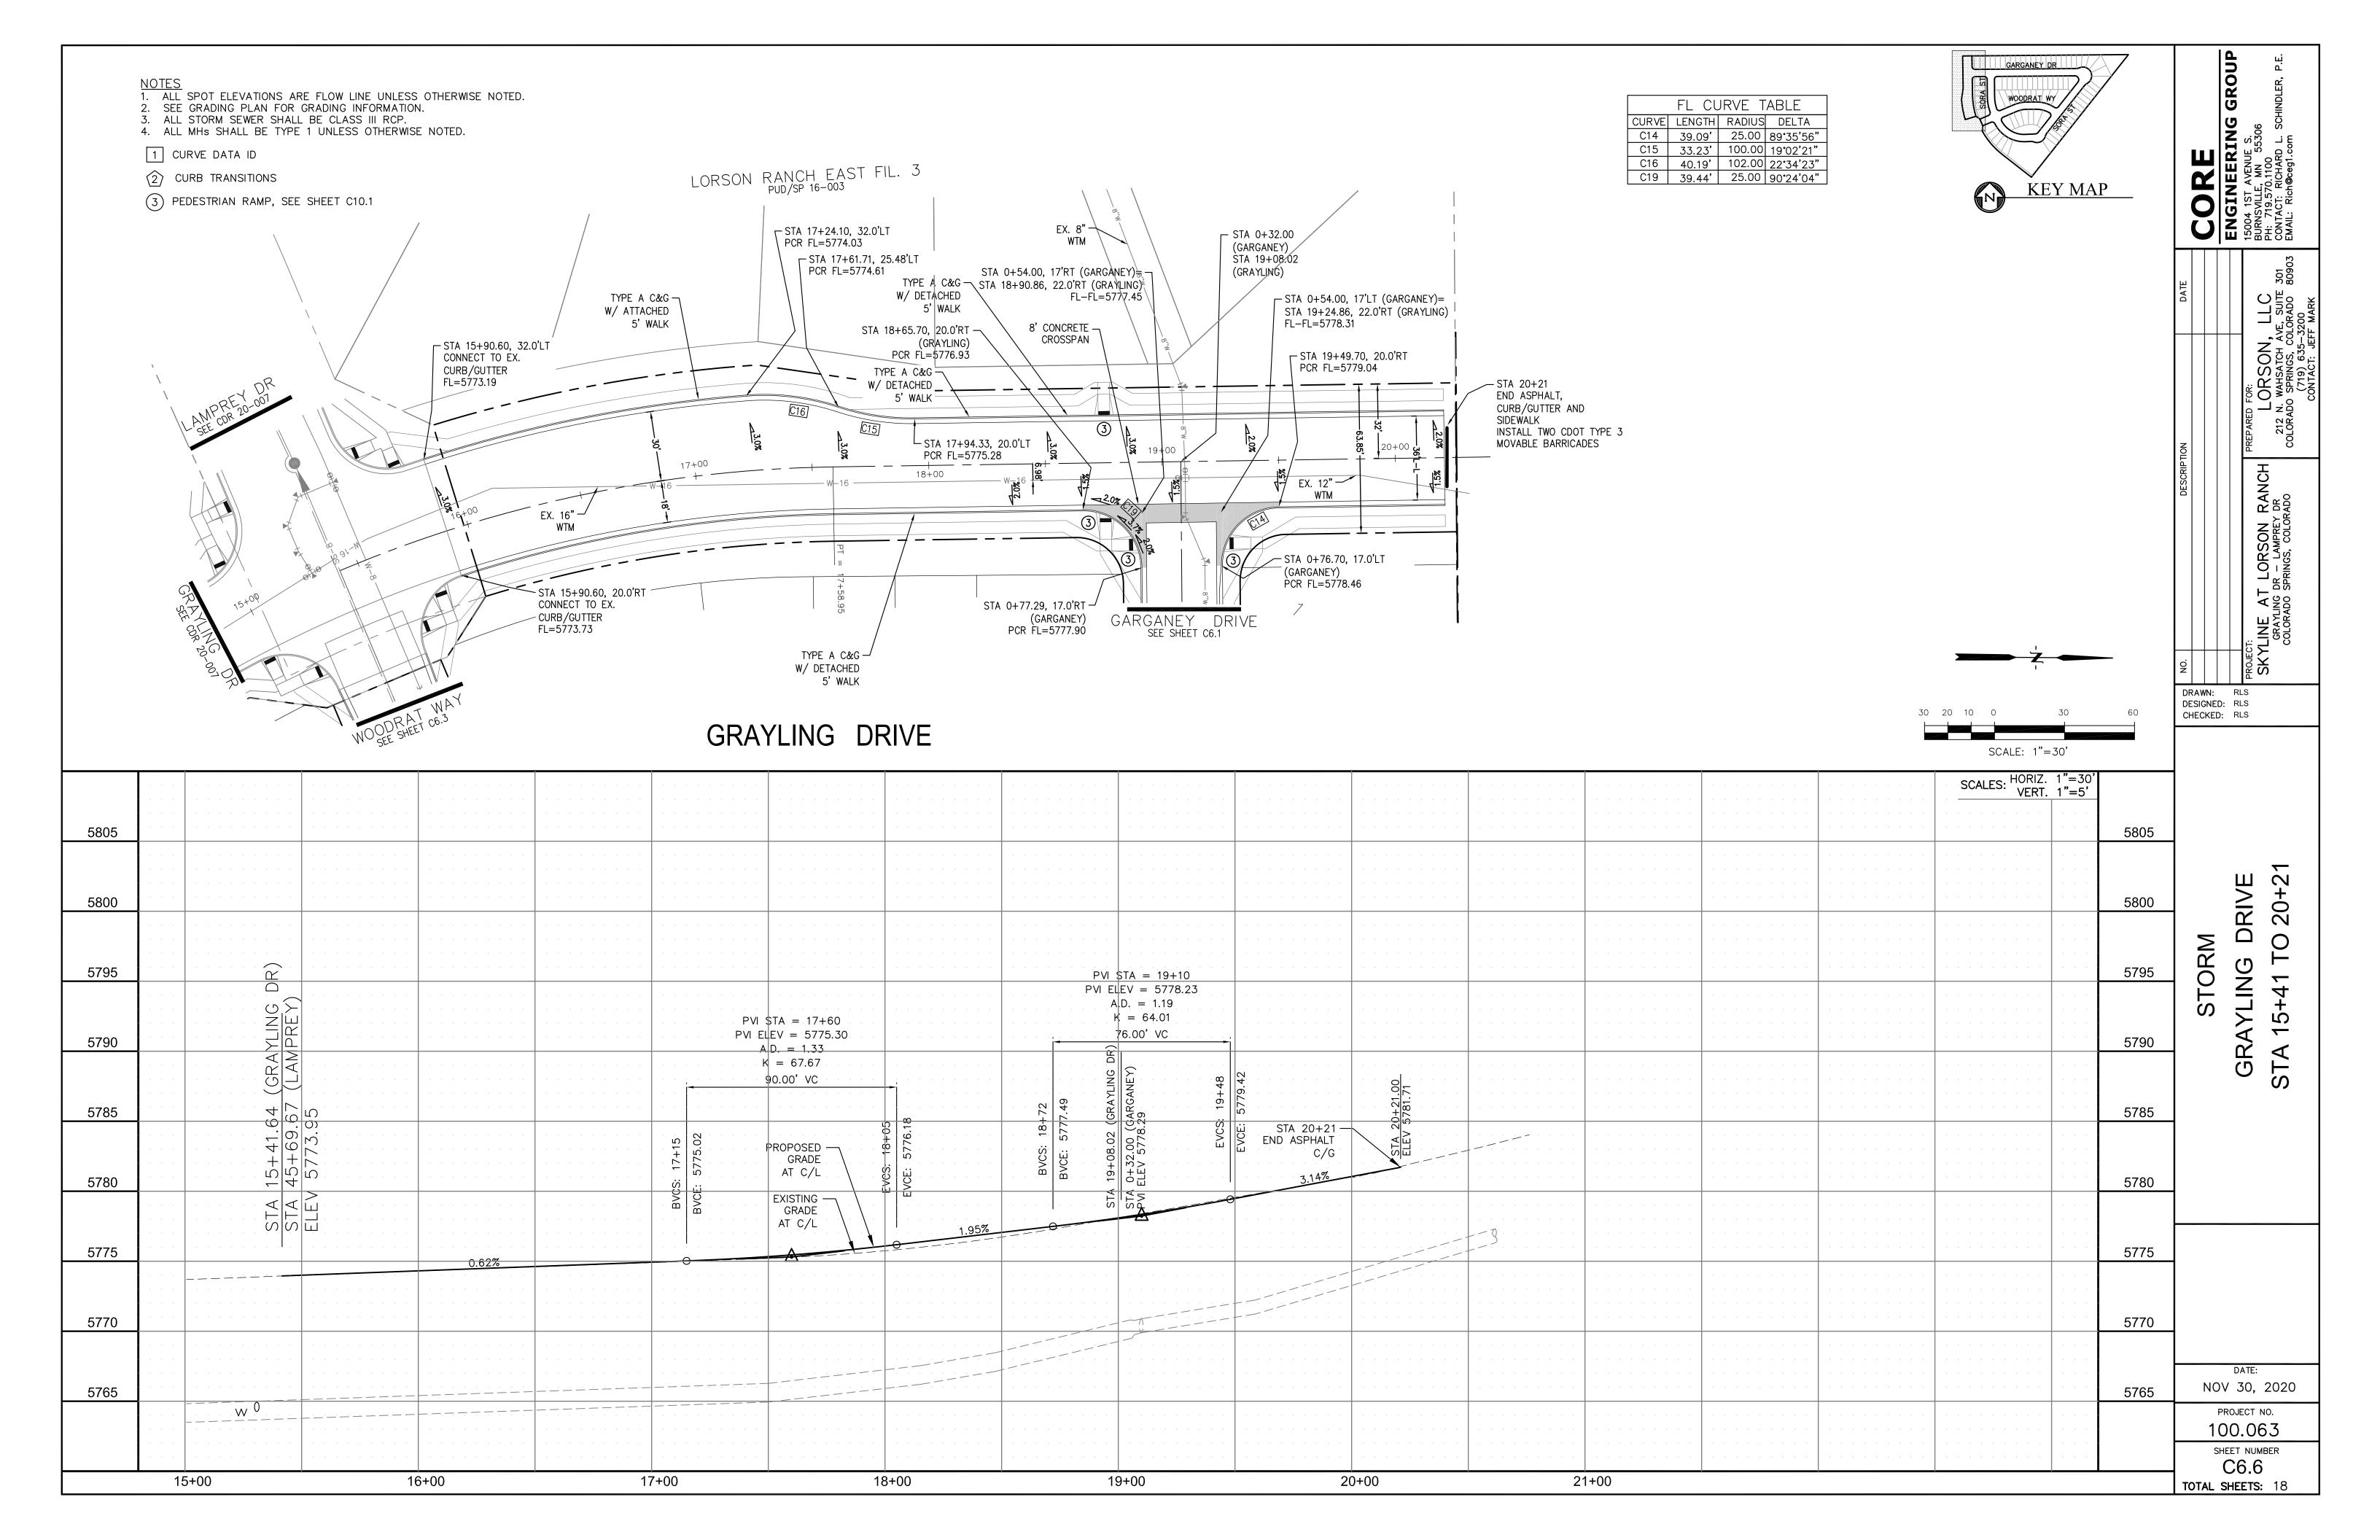


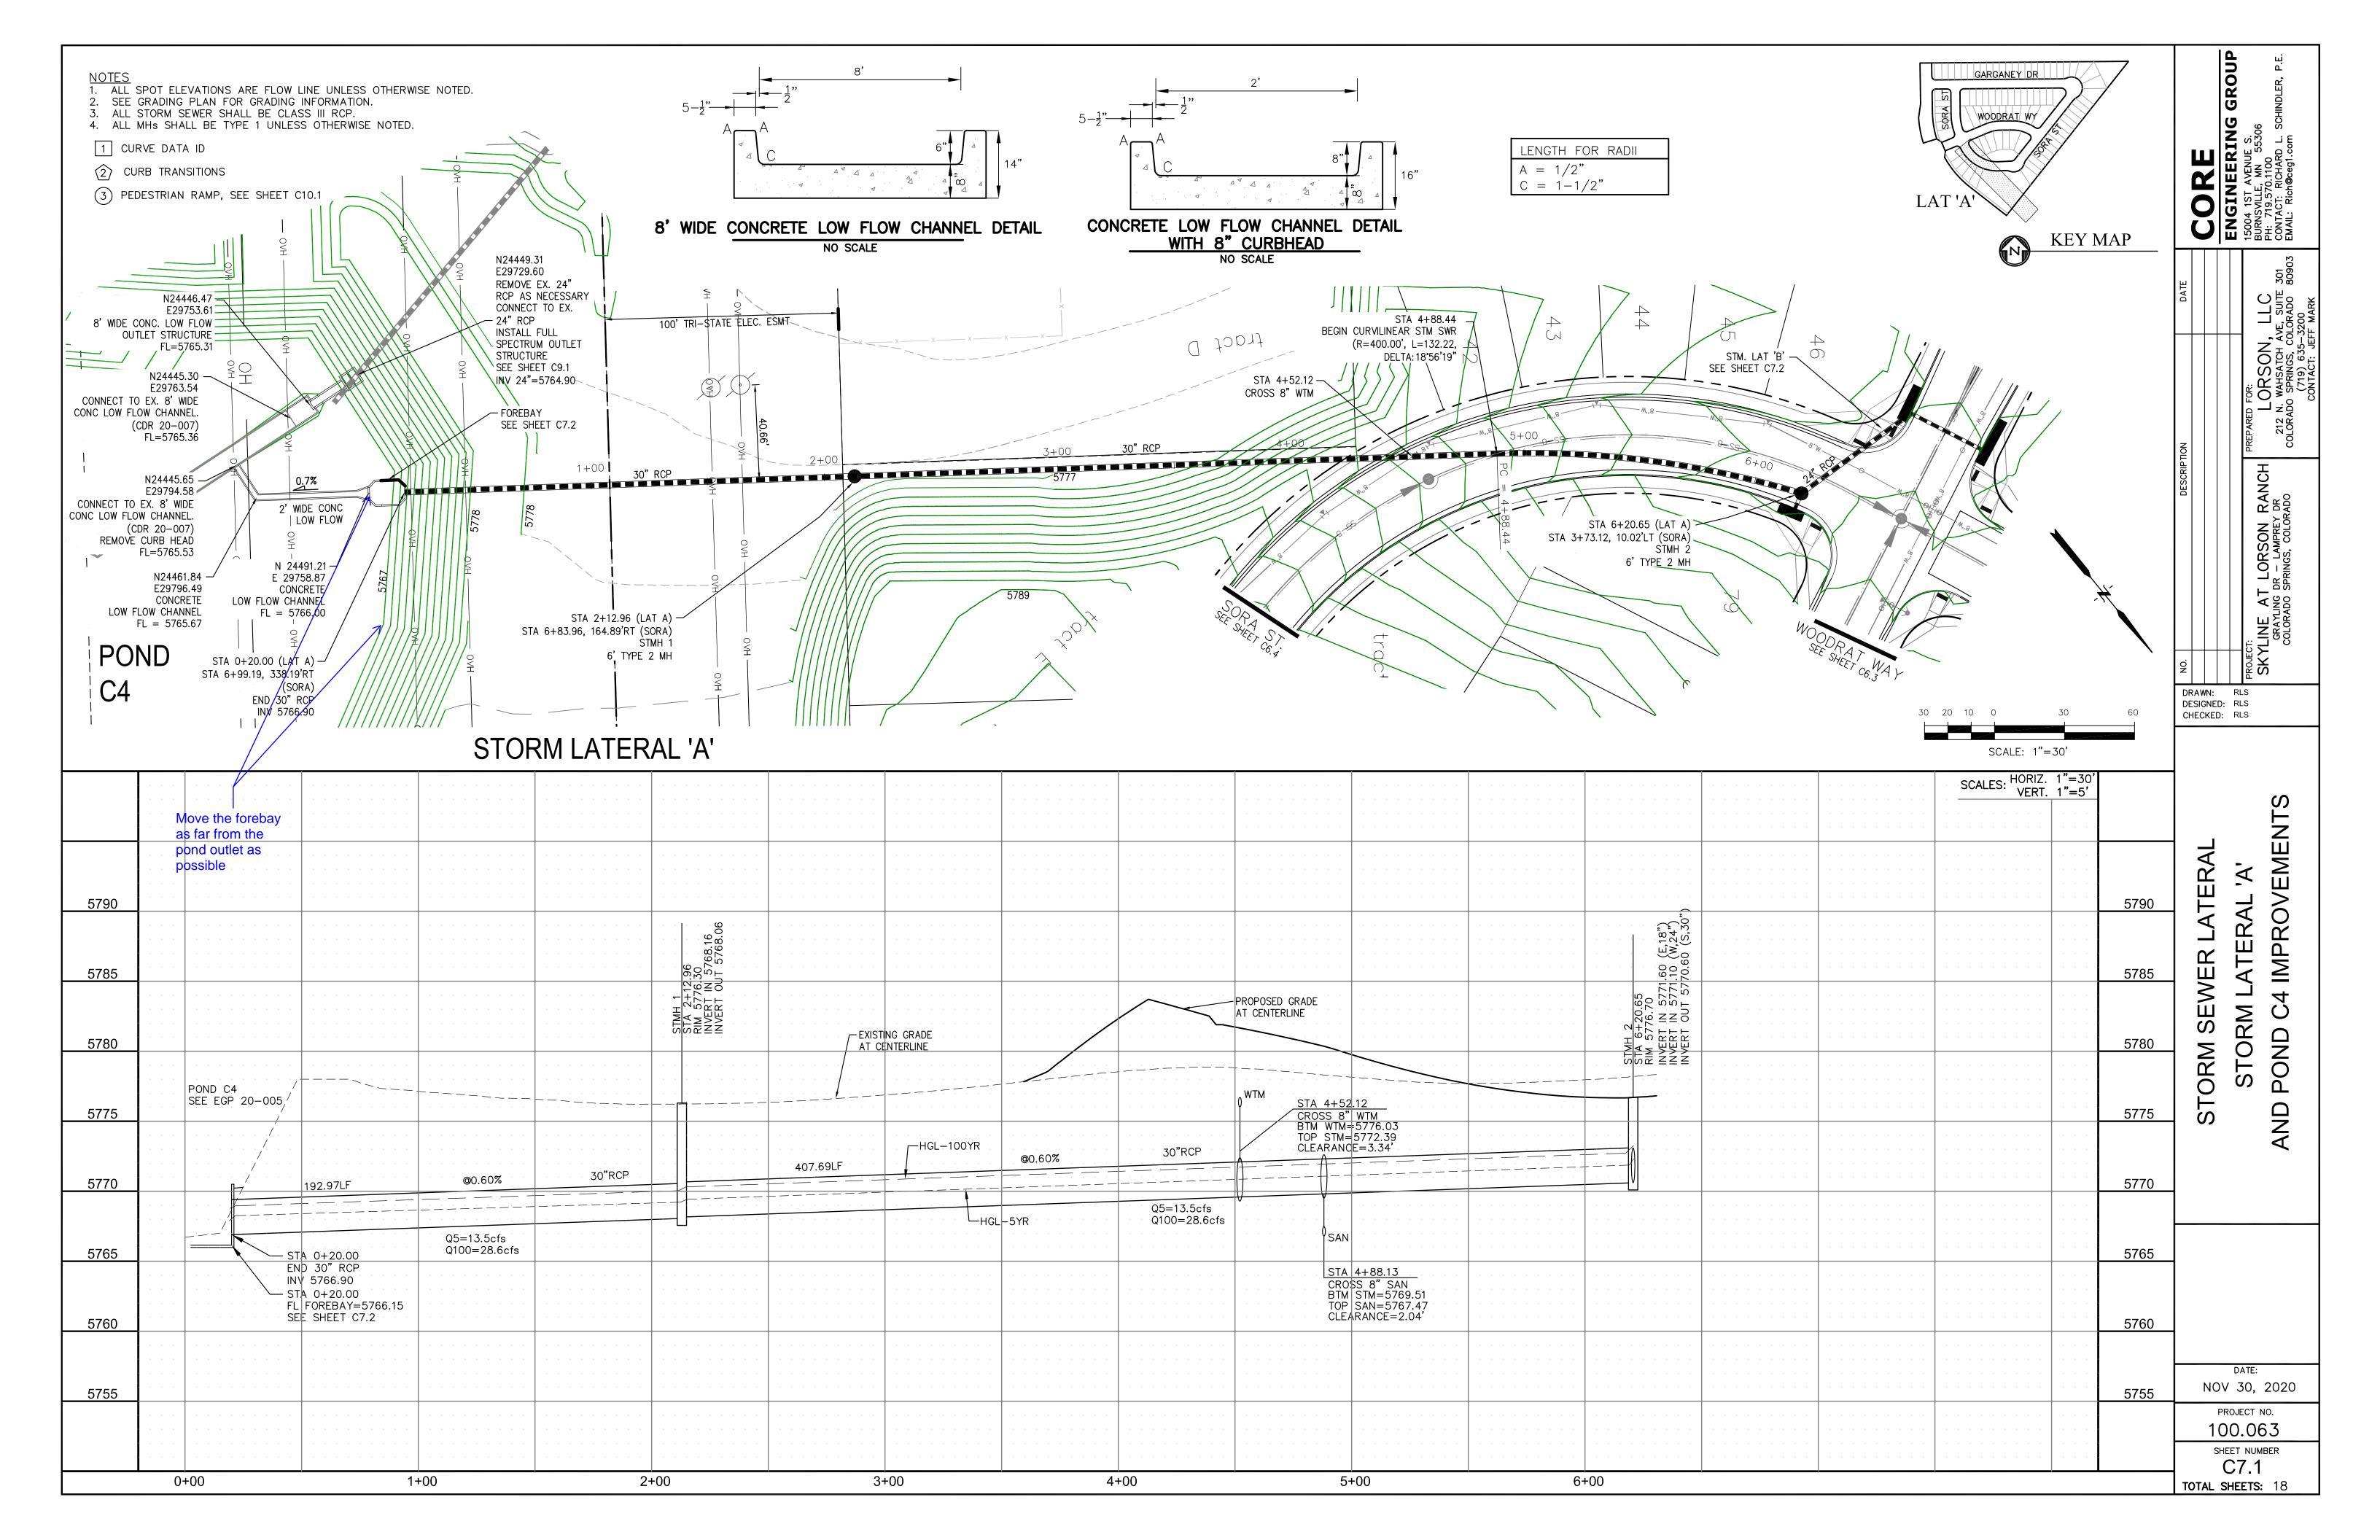


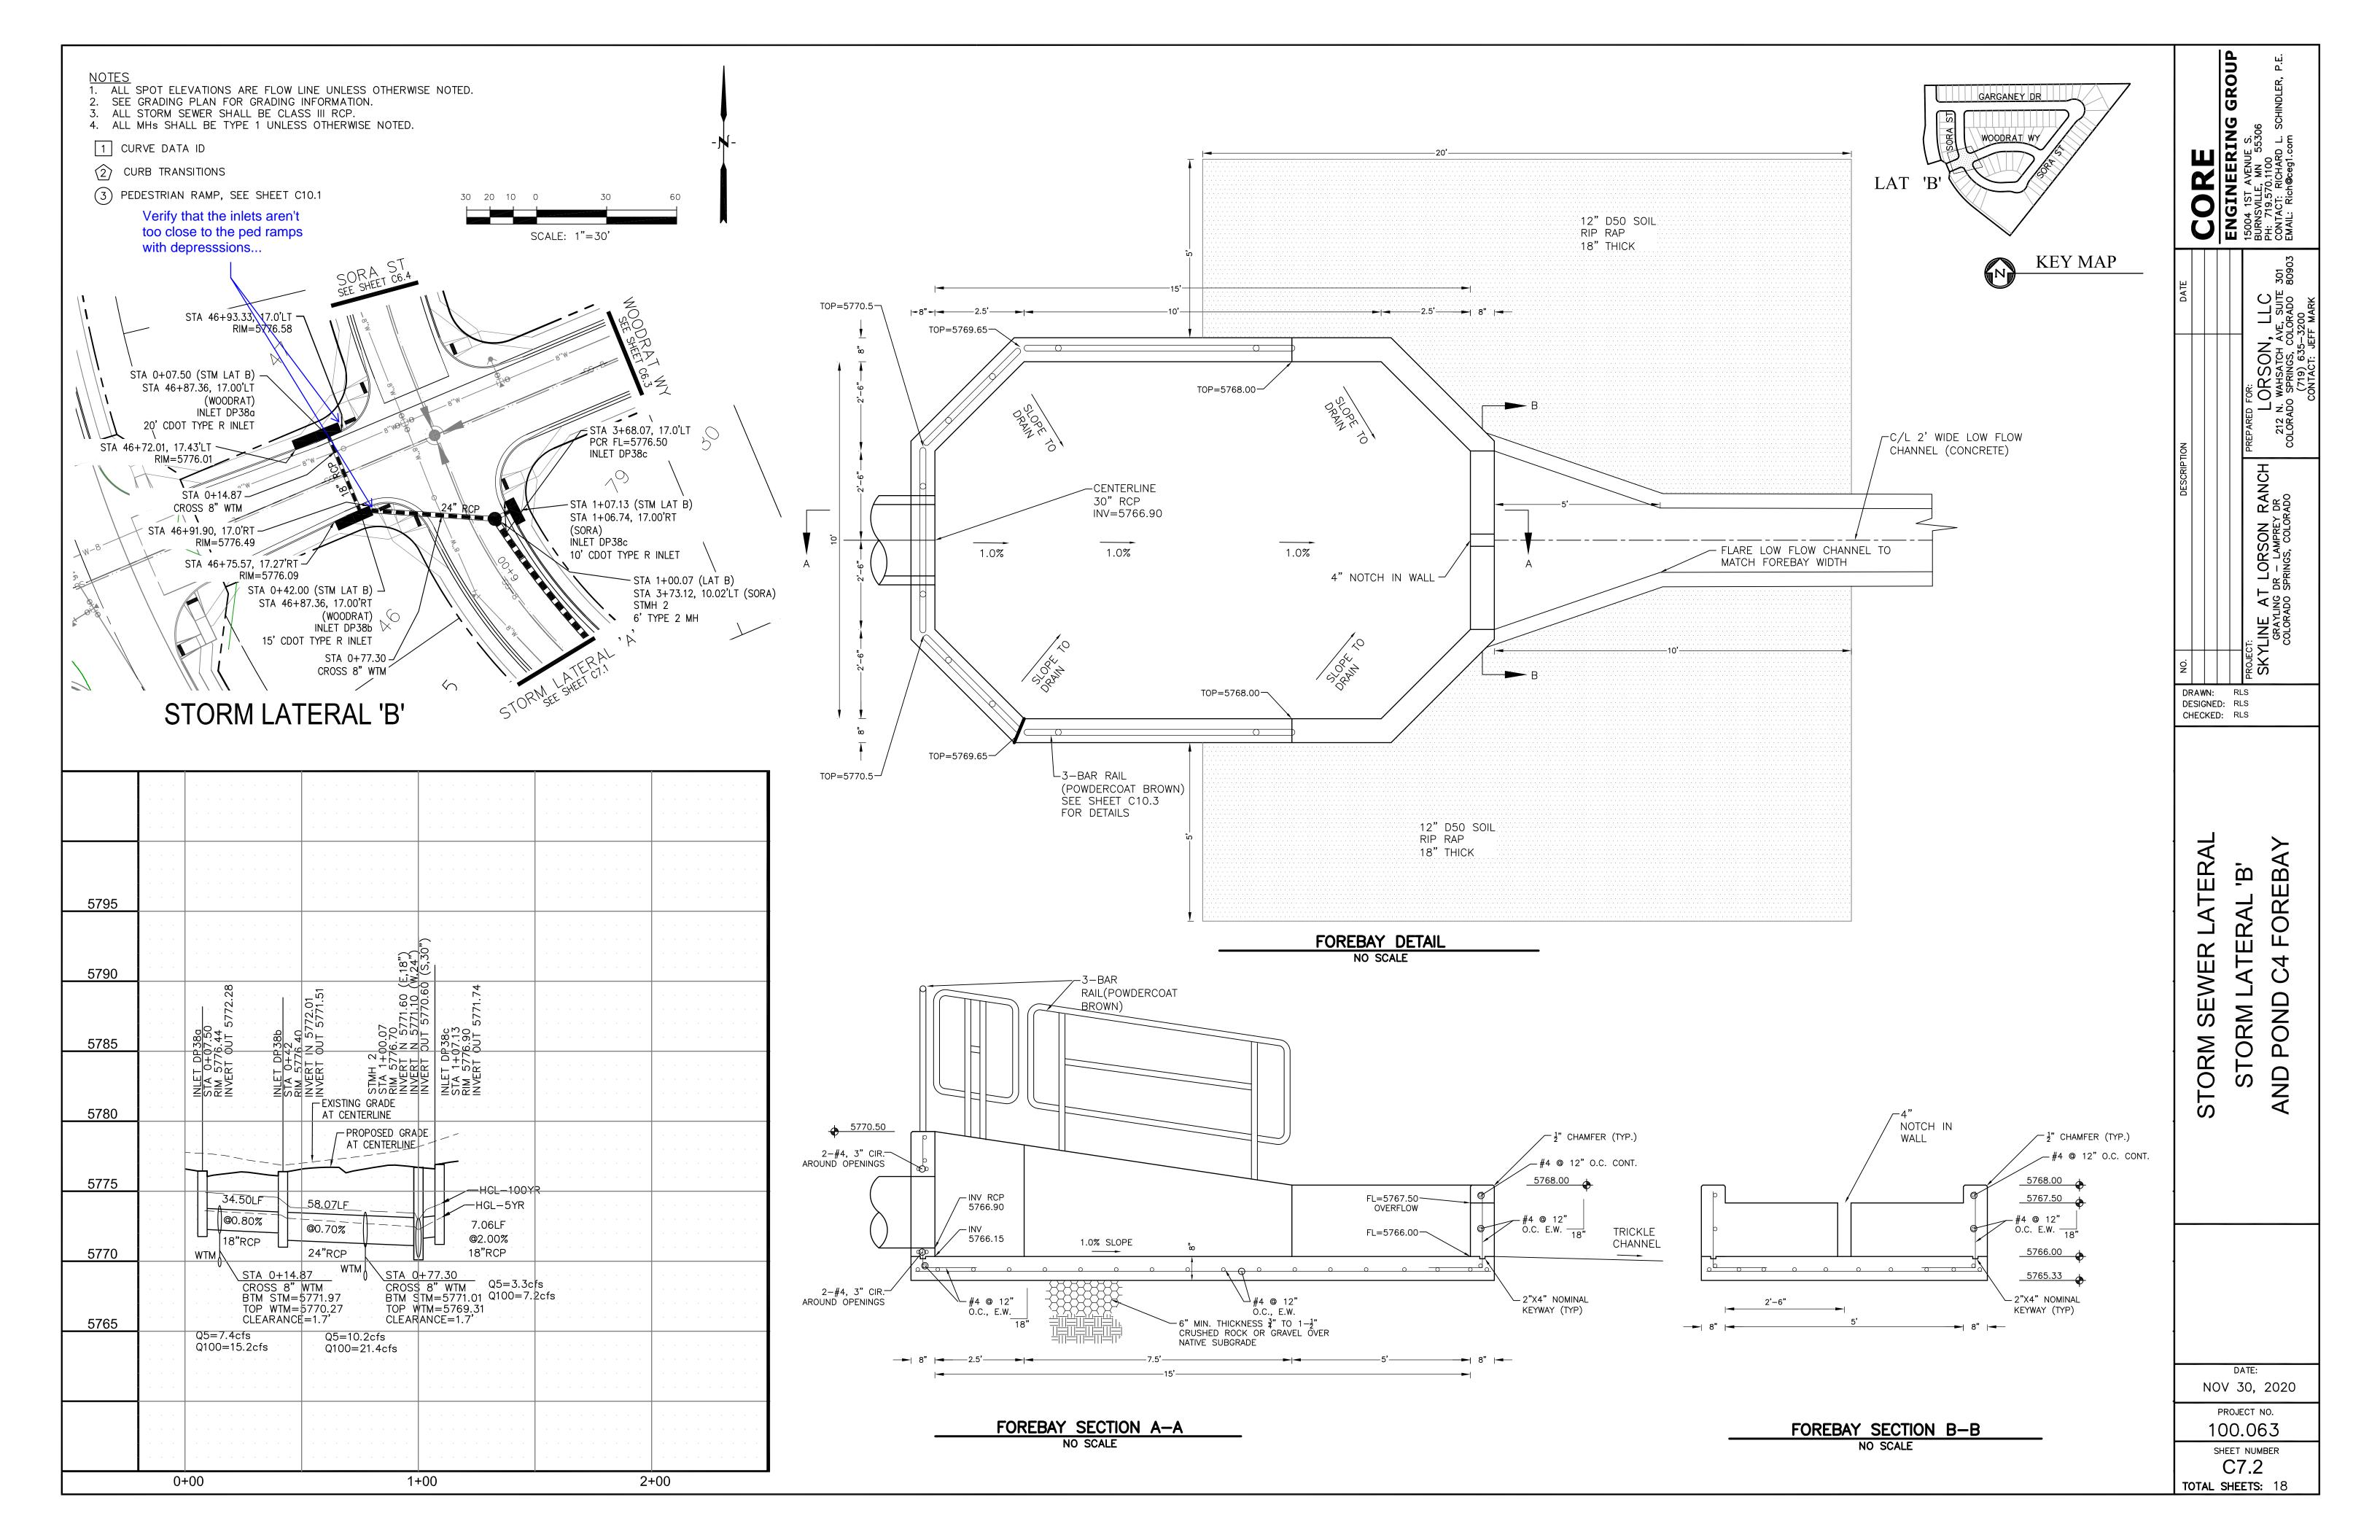

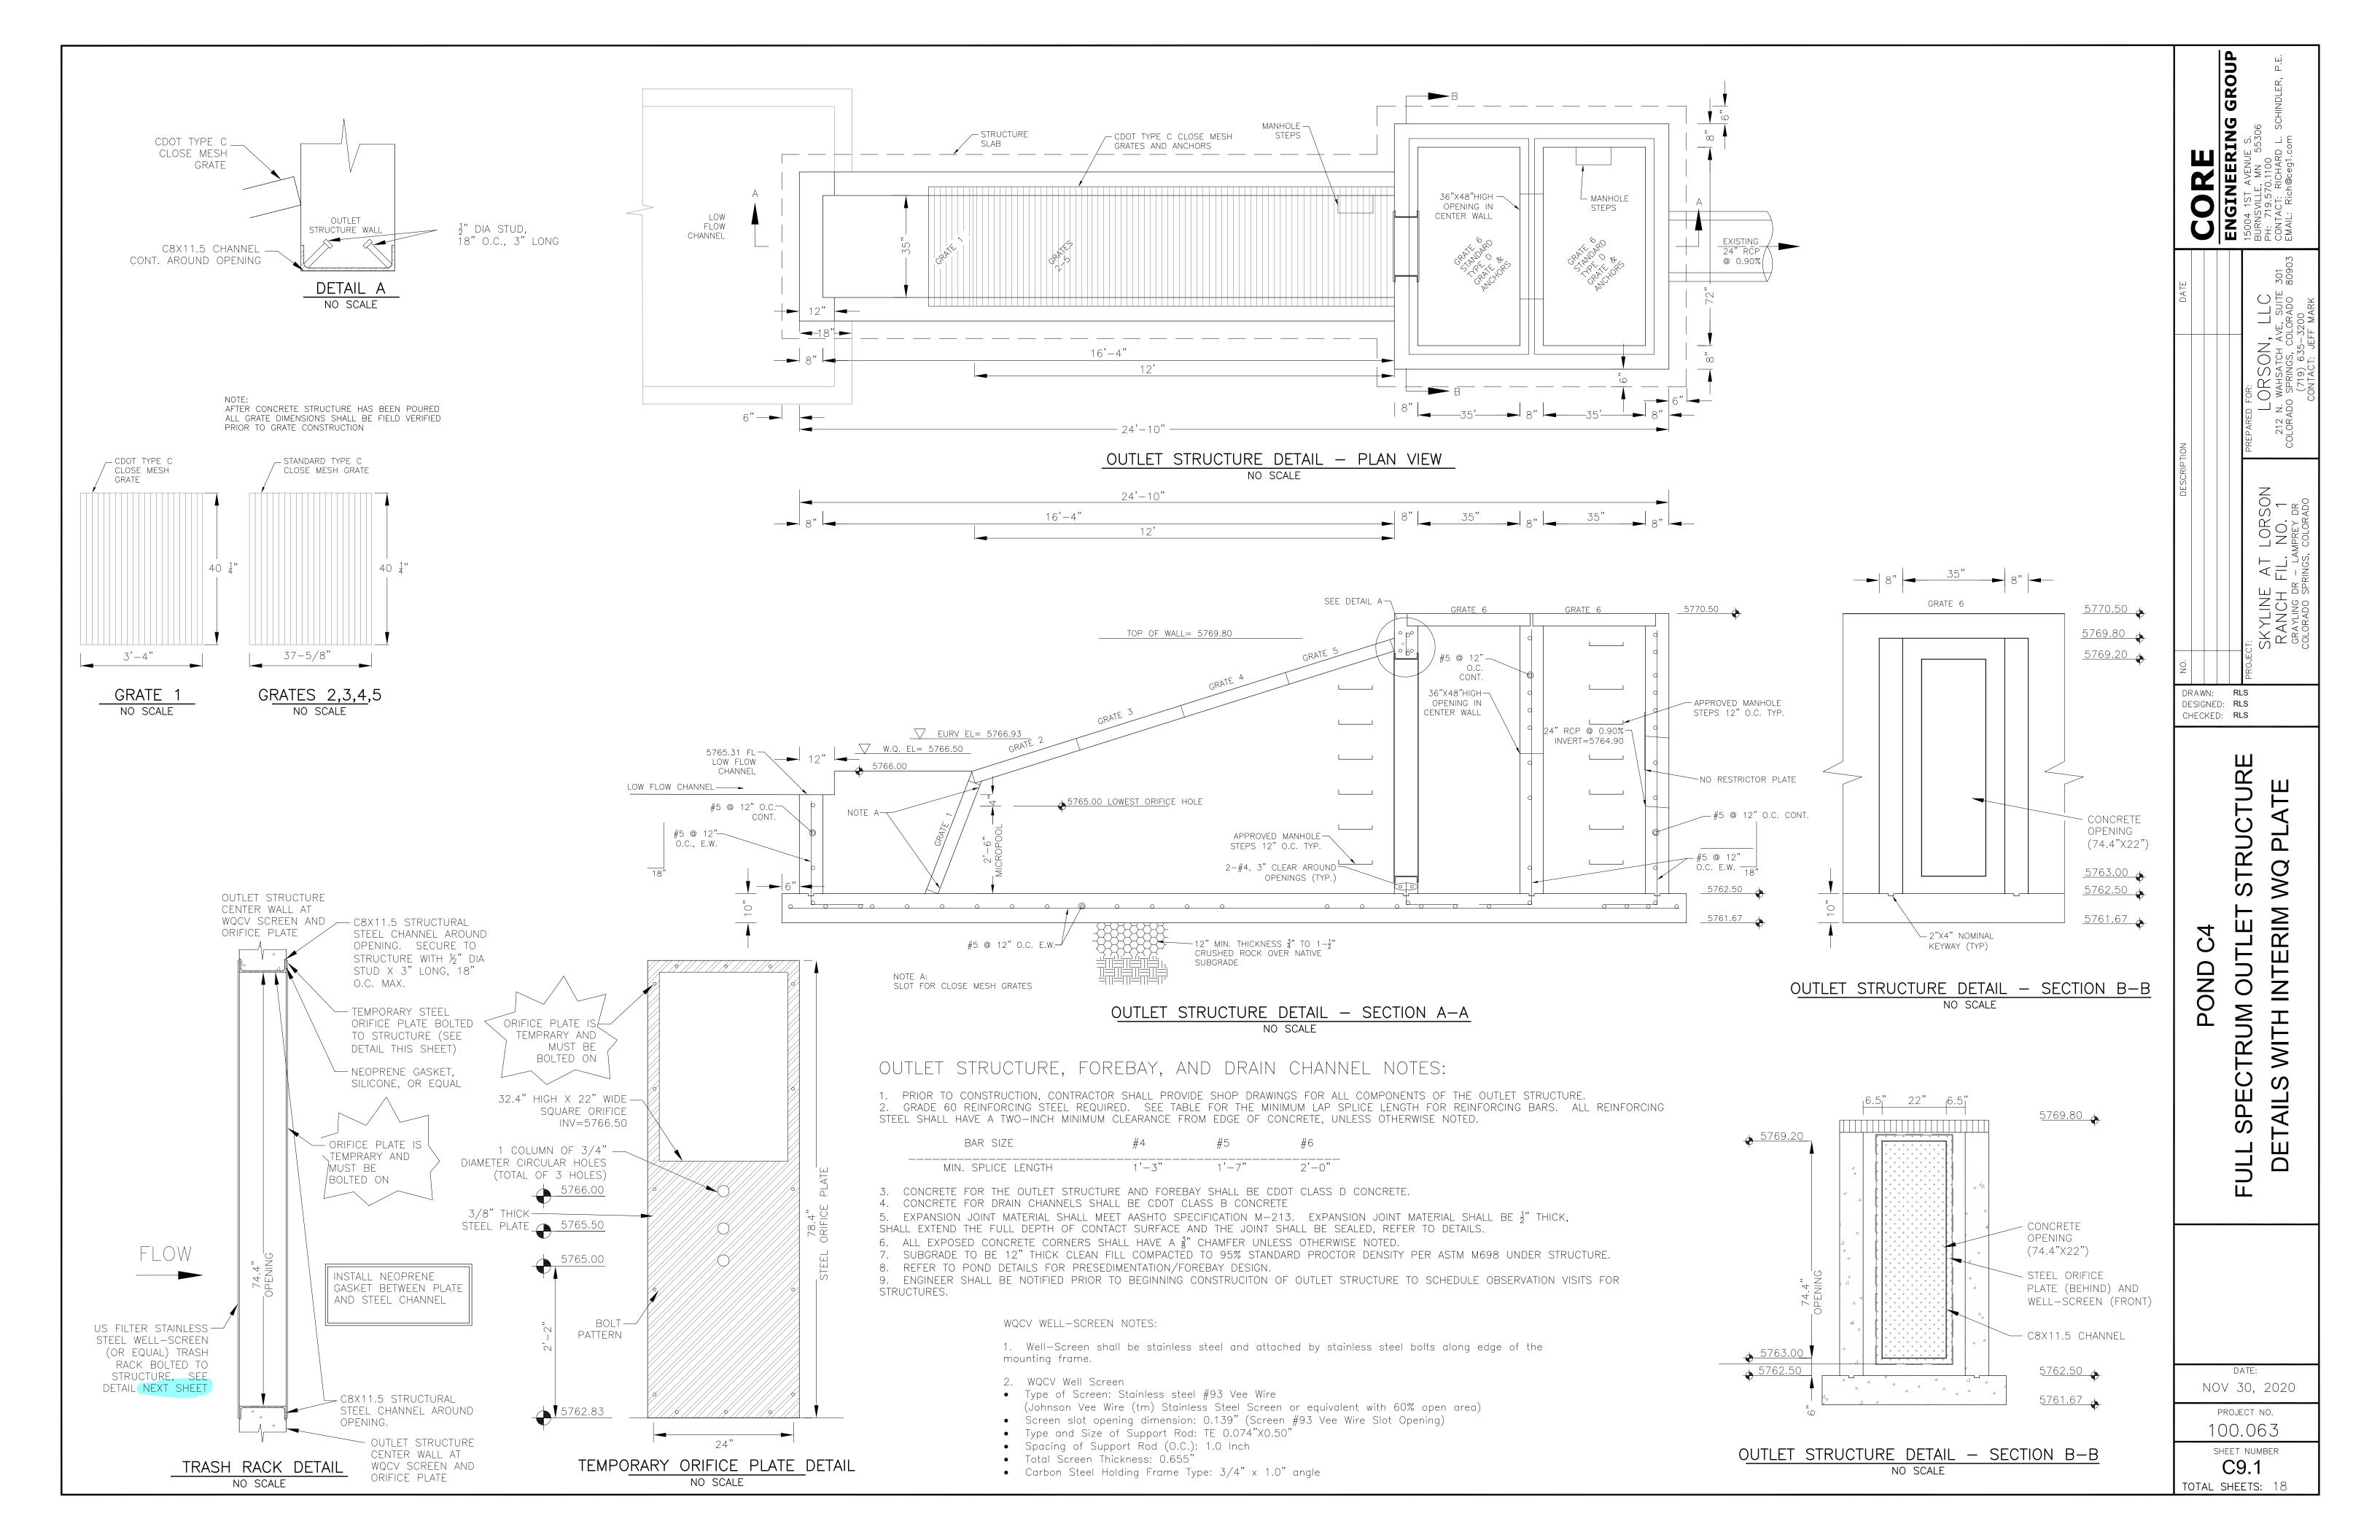


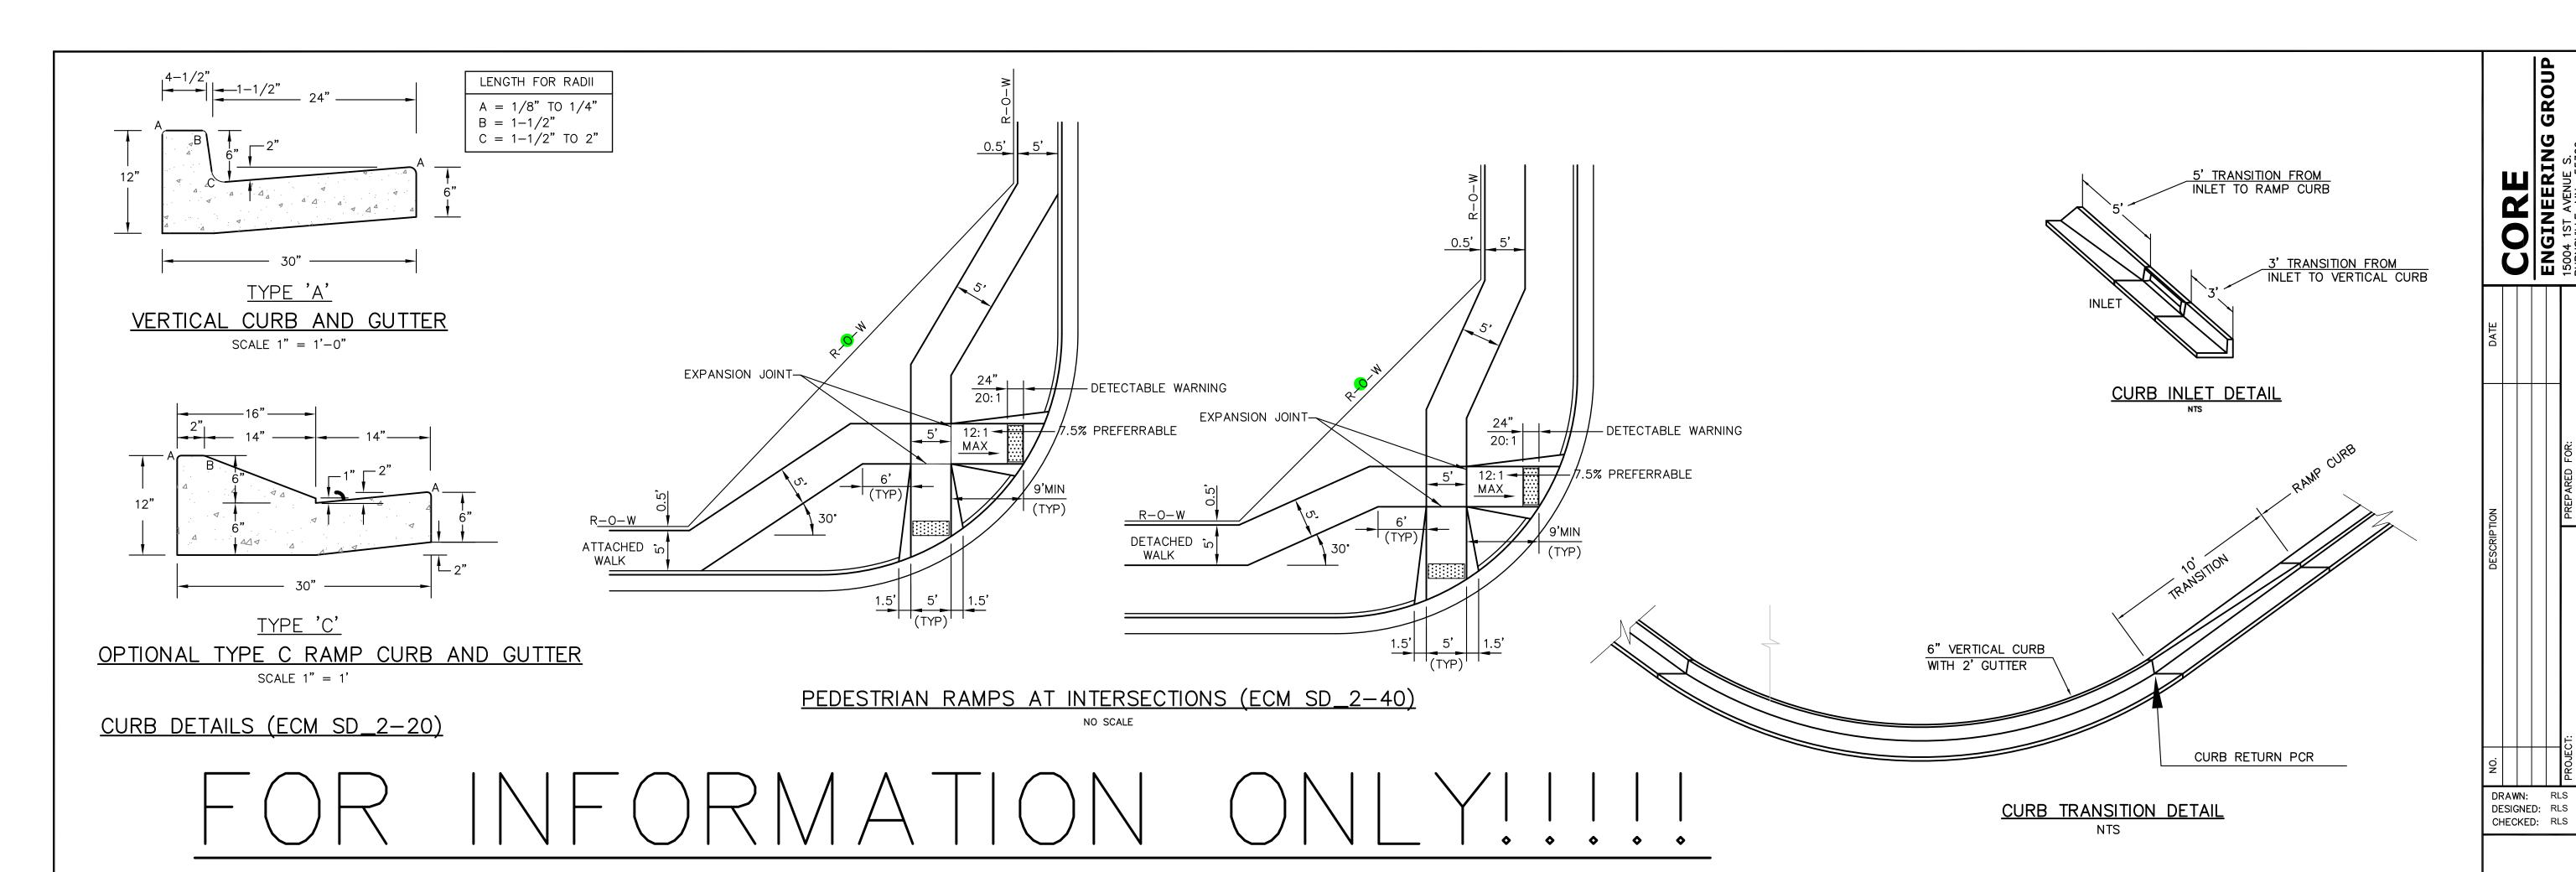


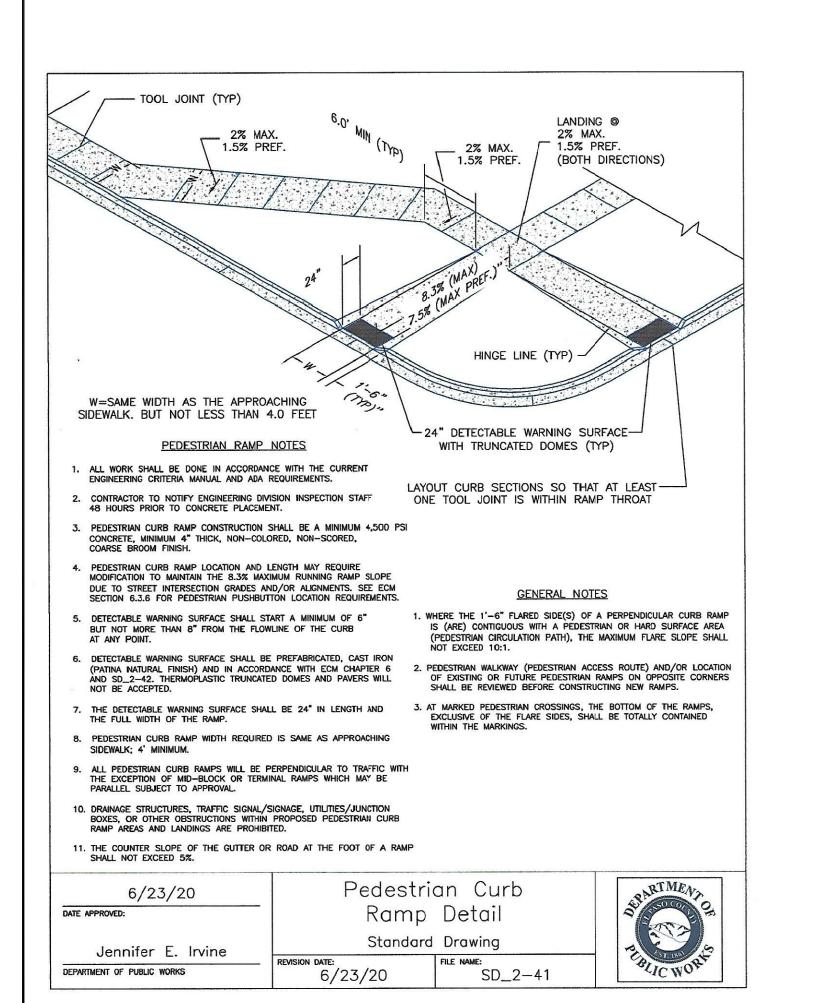


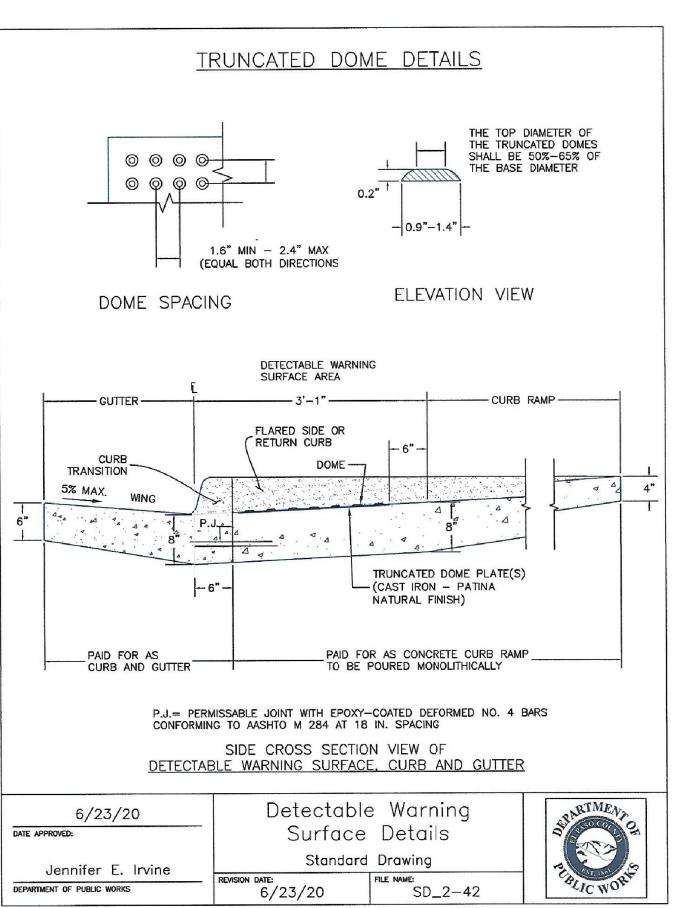





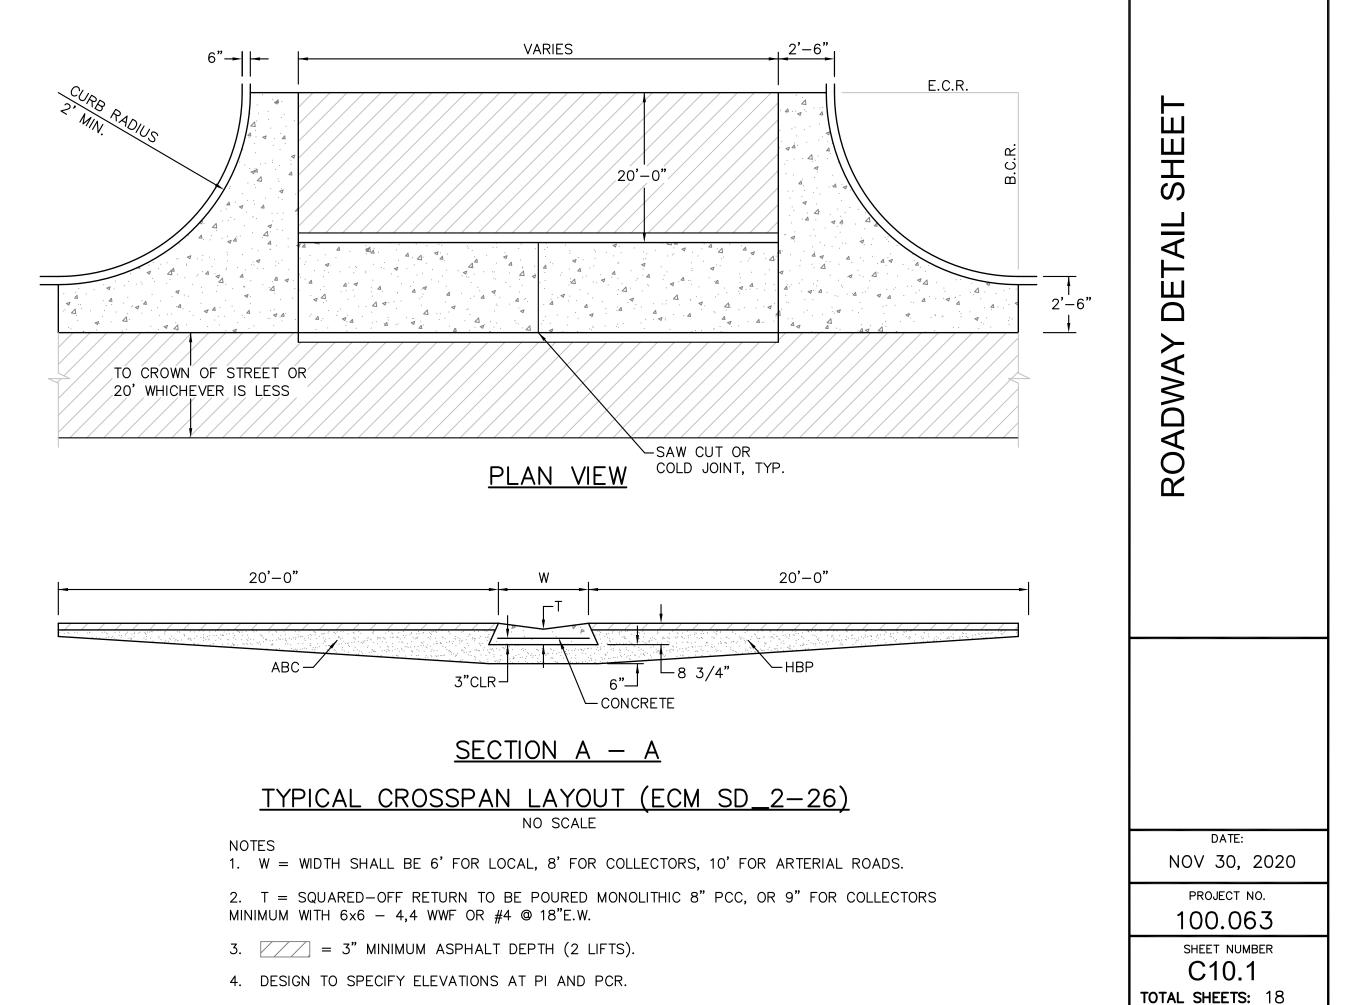


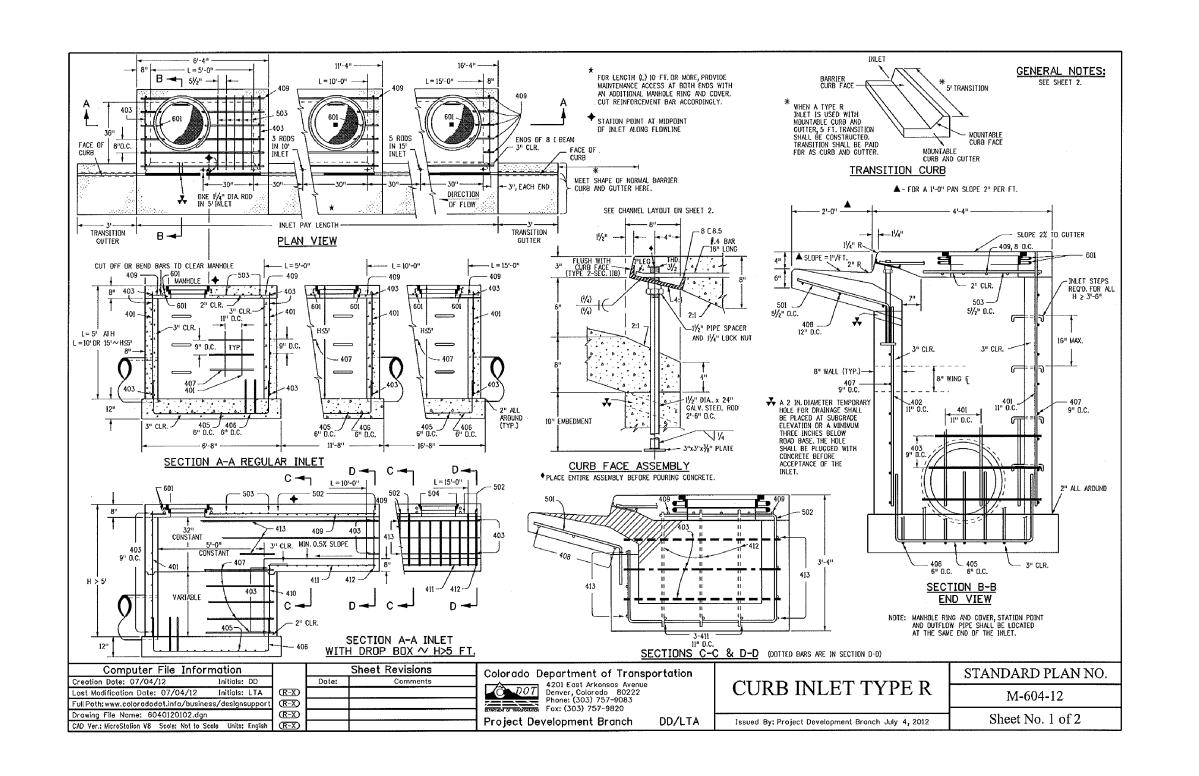

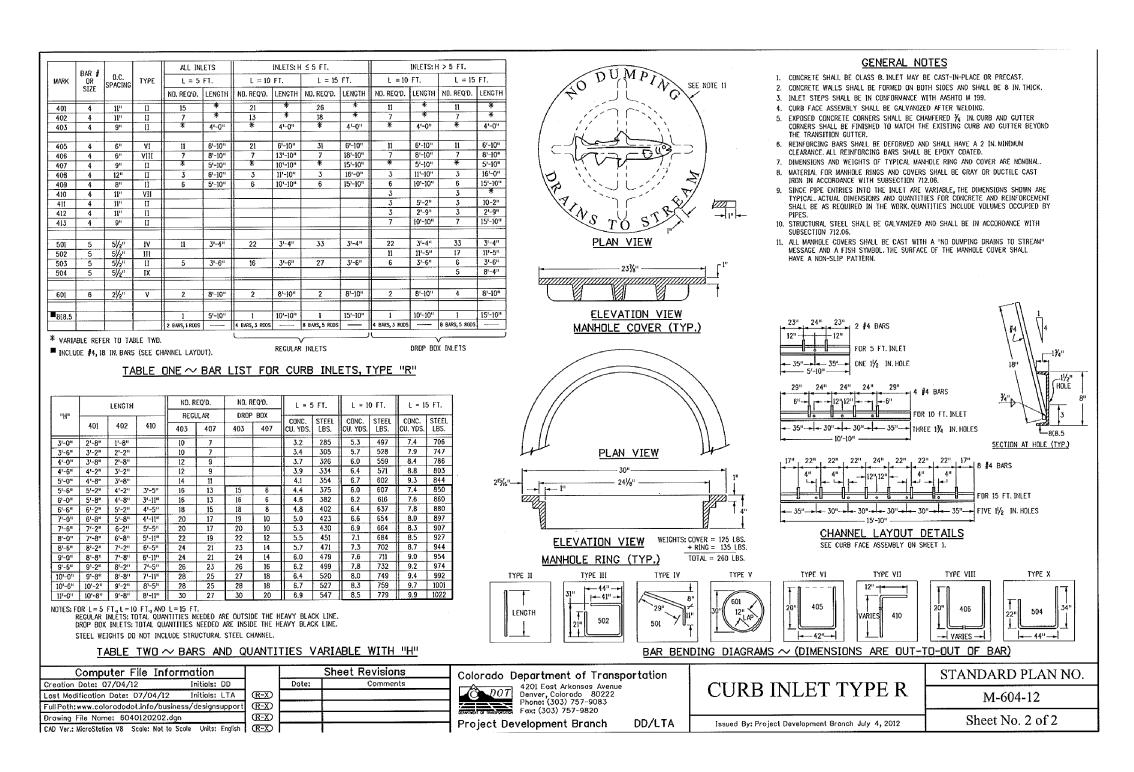

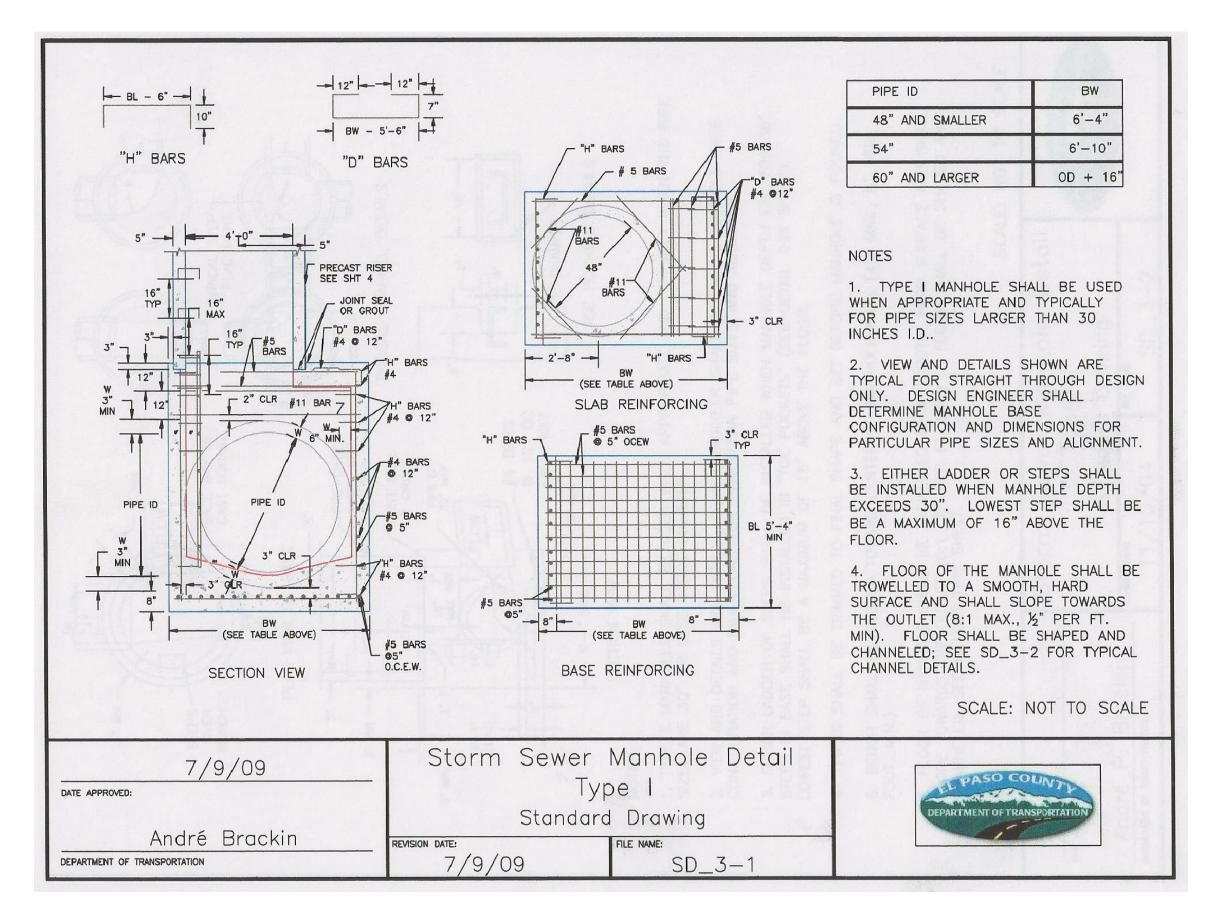

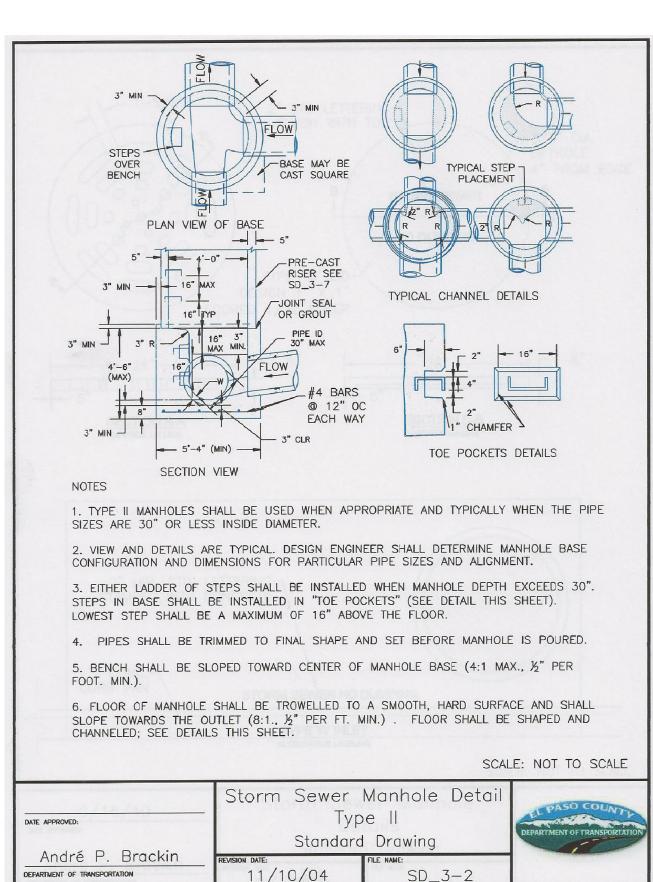

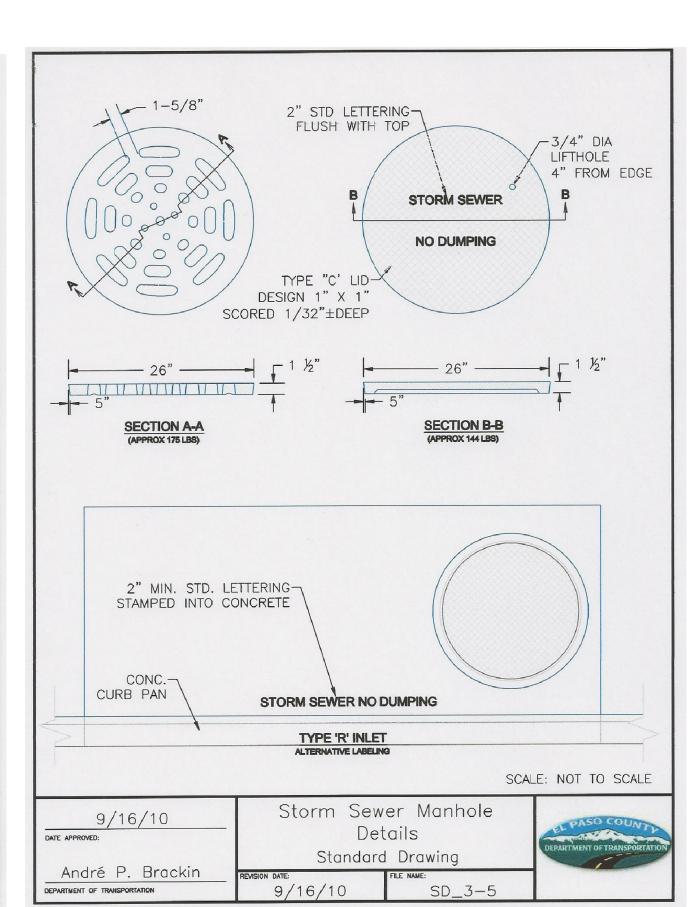


		ДОС	12)		ENGINEERING GROOP	15004 1ST AVENUE S.	BURNSVILLE, MN 55306 PH: 719.570.1100	CONTACT: RICHARD L. SCHINDLER, P.E.	EMAIL: Rich@ceg1.com	
	DATE						CLC	WE, SUITE 301	JLORADO 80903	:3200 FF MARK
	DESCRIPTION					PREPARED FOR:	LORSON, LLC	212 N. WAHSATCH AVE, SUITE 301	COLORADO SPRINGS, CO	(719) 635-3200 CONTACT: JEFF MARK
						CT:	SKYLINE AT LORSON	RANCH FIL. NO. 1	GRAYLING DR - LAMPREY DR	COLORADO SPRINGS, COLORADO
	NO.					PROJECT:				
	DRAWN: RLS DESIGNED: RLS CHECKED: RLS									


SKYLINE AT
LORSON RANCH FIL. N
STORM SEWER DETA

DATE:
NOV 30, 2020
PROJECT NO.
100.063

SHEET NUMBER

C10.2
TOTAL SHEETS: 18

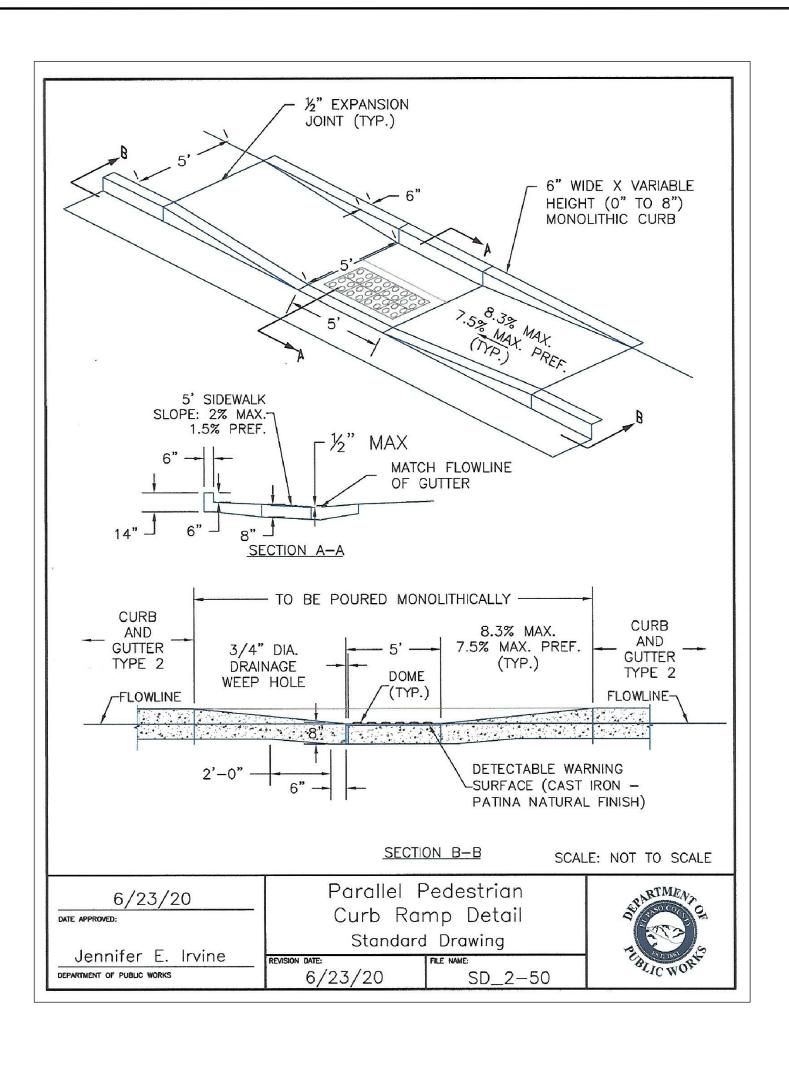

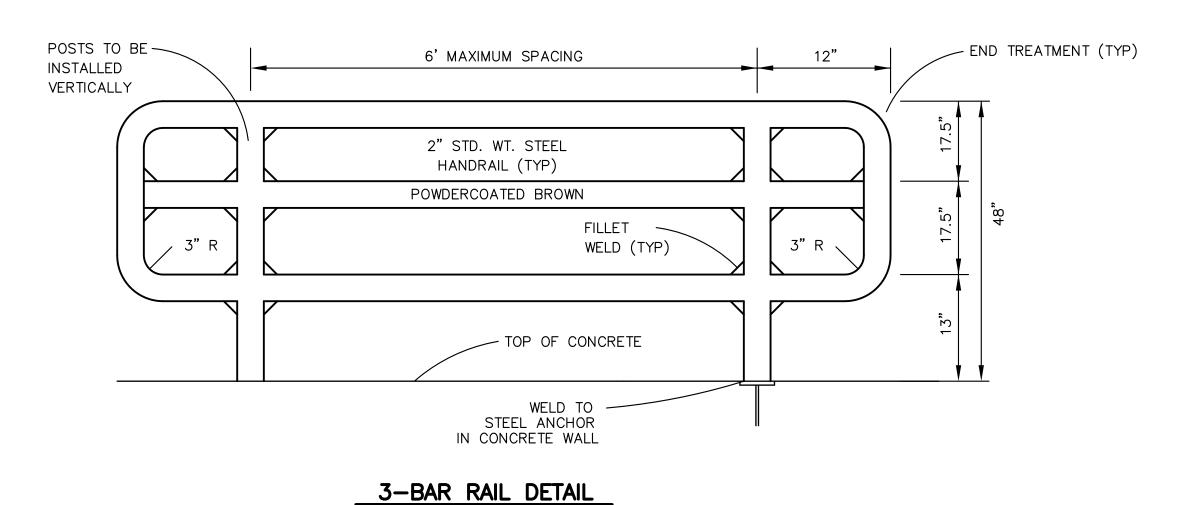

NO SCALE

LORSON RANCH FIL

DRAWN: RLS
DESIGNED: RLS
CHECKED: RLS

SKYLINE AT

NOV 30, 2020 PROJECT NO.

100.063 SHEET NUMBER
C10.3
TOTAL SHEETS: 18