



EL PASO COUNTY PLANNING & COMMUNITY DEVELOPMENT
SIGN APPLICATION

SC18024

DATE: _____

Business

Name: JUST FOR GRINS
Address: 11874 STAOLETON DRIVE
PEYTON, CO 80831

Zone: CR
Legal Description: LOT 3 THE SHOPS FIL NO 1
AT MERIDIAN RANCH

Type of Sign

Illuminated: X
Non-Illuminated: _____
Valuation: \$2700.00

Storefront Length &/or
Width: WEST 72' I.f., EAST 72' I.f.
NORTH 61' I.f., TOTAL 205' I.f.
Proposed Sign Sq. Ft. 115' sq. ft.

Existing Sign Sq. Ft. 0

Total Sign Sq. Ft. 115' sq. ft.

Contractor Information

Name: C & S SIGN CONTRACTORS

Address: 2022 OLYMPIC DRIVE
CO. SPGS., CO 80910


Phone: 719-660-3739

Type of License: D5A

Contractor ID# 21170

Vicinity Map

Tax Schedule # 4230319053
Please show major intersections.

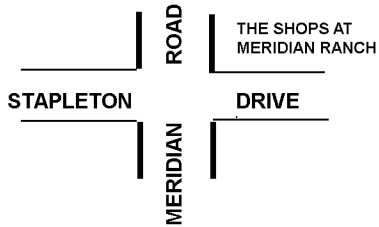

Sign Plan

(Please indicate dimensions and sign copy)
(SEE ATTACHED SIGN DESIGN AND SPEC SHEET)

Elevation Drawing

Indicate storefront length & placement of
sign.
(SEE ATTACHED SIGN DESIGN AND SPEC PAGE)




For Planning & Community Development Use Only

Approved Date: _____
Denied Date: _____
Comments: _____

Resubmittal? Yes No
1.5 square feet allowed per linear
foot of building wall.

Fee of \$262.00 must accompany this Application. Additional signs at time of first Application are \$125.00. Make checks payable to El Paso County.

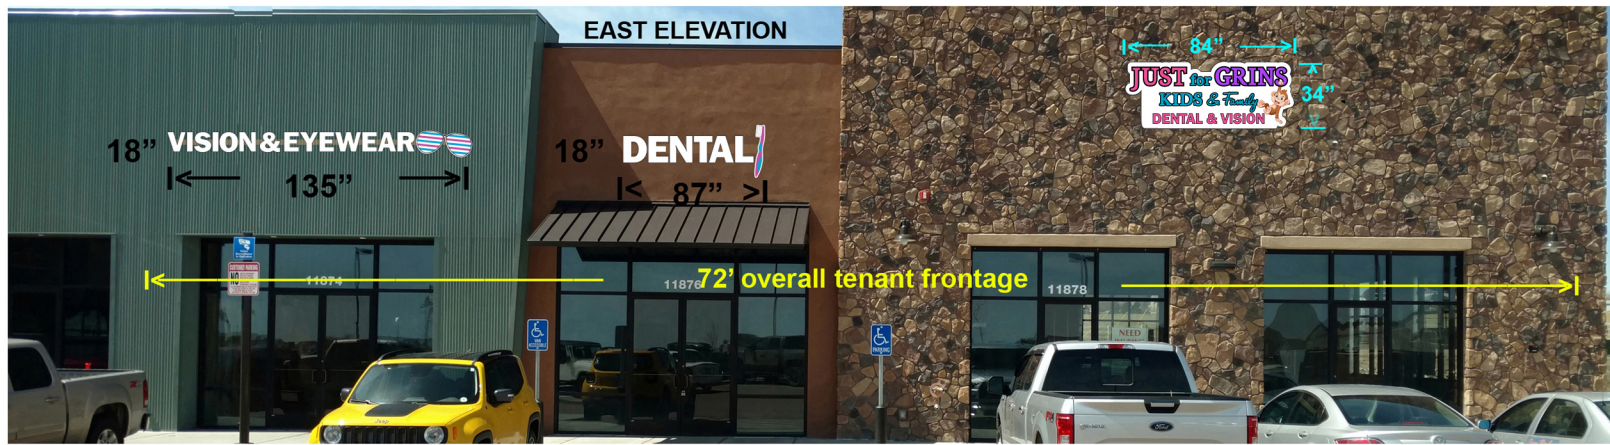

RACEWAY MOUNTED FRONT LIT STANDARD CHANNEL LETTER SET

Channel Letter Specifications:

Front lit, raceway mounted, aluminum fabricated, standard channel letter set having 5" black returns and 1" black trim caps, internal LED illumination, with white acrylic faces illuminated by white LED modules (see illumination specifications). Letters to be flush mounted to aluminum raceway, and raceway to be flush mounted to fascia as shown using adequate fastening anchors. Copy as shown.

Illumination Specifications:

White LED modules, low voltage power supply, low voltage insulated wiring, UL listed and approved, service/disconnect switch on raceway.

Electrical Specifications:

20A dedicated sign circuit


Raceway Specifications: (raceway not shown in image)

Aluminum fabricated raceway approximately 4"D X 7"H X (length as necessary) having a 1" mounting bar across top and back. Raceway to be painted to color match building fascia using Sherwin Williams color match system.

Logo Item Specifications:

Contoured logo cabinet having 3/16" white acrylic face, 5" black returns, 1" trim cap, with digital print face.

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN.

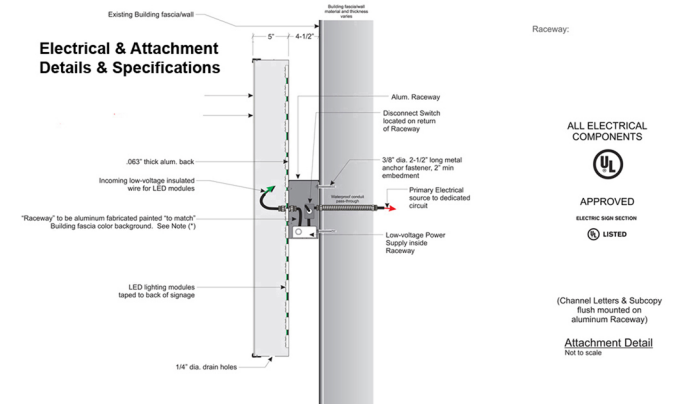

El Nissi Corporation
P.O. Box 63795
Colorado Springs, CO 80962
(719)492-5807

Customer: **JUST FOR GRINS**
Address: **11874 Stapleton Drive
Peyton, CO 80831**
Contact: **TIM MONTANO
(720)951-8322**

Sign Consultant:
Emil Rock, (719)492-5807
Approved by:

Designed by:

KR

Article 600 of the National Electric Code (NEC)

This statement "MUST" go on every technical drawing that has a sign installed in any jurisdiction in the United States

(Note: the "UL" label or logo, is the Underwriters Laboratory icon and must be placed on every electrical sign attachment or installation detail drawing. UL is only one of several certifying agencies in the U.S.)

ALL ELECTRICAL COMPONENTS
UL
APPROVED
ELECTRIC SIGN SECTION
LISTED