# FINAL DRAINAGE REPORT FOR LOT 1 POWERS POINTE FILING NO 1 5835 OMAHA BOULEVARD COLORADO SPRINGS, COLORADO

### **JULY 2020**

## Prepared For:

## A STORAGE PLACE - COLORADO SPRINGS LLC 5835 OMAHA BOULEVARD COLORADO SPRINGS, CO 80915 (719) 694-0246

Prepared By:

TERRA NOVA ENGINEERING, INC.

721 S. 23<sup>RD</sup> STREET Colorado Springs, CO 80904 (719) 635-6422

Job No. 1745.00 County File No. PPR1929

# FINAL DRAINAGE REPORT FOR LOT 1 POWERS POINTE FILING NO 1 5835 OMAHA BOULEVARD COLORADO SPRINGS, COLORADO

### TABLE OF CONTENTS

Engineer's StatementPage	: 3
PurposePage	: 4
General Description	: 4
Historic Drainage ConditionsPage	: 4
Developed Drainage Conditions	: 5
Hydrologic And Hydraulic CalculationsPage	6
Floodplain Statement	6
Water Quality and DetentionPage	; 6
Erosion ControlPage	: 7
Construction Cost OpinionPage	: 7
Drainage Fees	: 7
Maintenance Page	: 7
SummaryPage	: 7
Bibliography	8

### **REQUIRED MAPS AND DRAWINGS**

VICINITY MAP
S.C.S. SOILS MAP
FEMA FIRM MAP
HYDROLOGIC AND HYDRAULIC CALCULATIONS
HISTORIC FLOW EXHIBIT
DRAINAGE MAPS

### CERTIFICATION STATEMENT:

## **Engineers Statement**

This attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the master plan of the drainage basin. I accept responsibility for any bability caused by any negligent acts, errors or omissions on my part in preparing this report.

L Ducett, P.E. 32339

Seal

### **Developers Statements**

I, <u>A STORAGE PLACE - COLORADO SPRINGS LLC</u>, the developer have read and will comply with all of the requirements specified in this drainage report and plan.

A STORAGE PLACE - COLORADO SPRINGS LLC
Business Name

Title:

Address:

El Paso County Approval:

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 & 2, El Paso County Engineering Criteria Manual and Land Development Code as amended.

Jennifer Ervine, P.E.

County Engineer / ECM Administrator

Conditions:

APPROVED Engineering Department

10/08/2020 7:12:22 AM dsdnijkamp

EPC Planning & Community Development Department

# FINAL DRAINAGE REPORT FOR LOT 1 POWERS POINTE FILING NO 1 5835 OMAHA BOULEVARD COLORADO SPRINGS, COLORADO

### **PURPOSE**

The purpose of this Final Drainage Report is to compare the existing drainage patterns and runoff quantities with those resulting from the proposed improvements to the A Storage Place property and to determine the impact of the site development on downstream and adjacent properties. This site has previously been studied in:

Preliminary/Final Drainage Report for Powers Pointe, Filing No. 1, Nolte and Associates (1996)

### **GENERAL DESCRIPTION**

This Final Drainage Report is an analysis of approximately 5.15 acres for the site located at 5835 Omaha Boulevard, previously platted as Lot 1 Powers Pointe Filing No 1. The property is currently used as a residential and commercial self-storage facility and the proposed improvements are in conformance with its existing use.

The property is located in the northwest quarter of Section 7, Township 14 South, Range 65 West of the 6<sup>th</sup> Principal Meridian in the El Paso County, Colorado, near the intersection of Omaha and N Powers Boulevards. More specifically, the site is bounded on the north by Omaha Boulevard, on the south by vacant unplatted land, to the east by All Foster Lumber Sub and Lots 4-5 Blk 2 O K Sub, to the west by Lots 1-2 Powers Pointe Filing No 2, Powers Pointe Filing No 3, Lot 1 Powers Pointe Filing No 4, and Lots 1-3 Powers Pointe Filing No 5.

The site lies within the Sand Creek Drainage Basin and is subject to the Sand Creek DBPS. For the reach of Sand Creek to which this site contributes, no regional detention facilities were proposed since the substantially developed nature of the area did not provide any suitable locations.

The soil consists exclusively of Blendon Sandy Loam (10), designated as belonging to Hydrologic Soil Group B. The study area is primarily metal buildings with asphalt and concrete lot areas. The existing topography has a consistent 2% slope from the north to the south.

### HISTORIC DRAINAGE CONDITIONS

This site was previously analyzed in the *Preliminary/Final Drainage Report for Powers Pointe, Filing No. 1, Nolte and Associates (1996).* 

The 5.15 acre site is 1191 feet long by 189 feet wide with the long axis oriented north-south. The northern three-quarters of the site has three rows of storage buildings with concrete driving lanes on all sides. On the southern quarter sits a single row of storage buildings with asphalt lots on either

side for the outdoor storage of vehicles. The property is accessed from the north via Omaha Boulevard. Ainsworth Street, which runs along the north and west side of the property has curb and gutter which prevents offsite runoff from entering the site from those directions, while on the east side the grading is such that the property line forms the drainage boundary on that side; therefore, no offsite runoff affects this property. However, a portion of the commercial properties west of Ainsworth Street is part of the offsite basin analyzed.

The runoff generated onsite is mostly directed southward between the rows of storage buildings via swales and flows onto the undeveloped area at the south end of the property, sheet flowing south and west into the public drainage way along Powers Boulevard and eventually into Sand Creek. There is also a section on the west side of the property that drains westward to the adjacent street. The property is composed of three drainage basins.

Basin EX-A contributes to Design Point X-1 and has an area of 1.64 acres consisting of roofs, concrete, and gravel, generating runoff amounts of Q5= 5.8 cfs and Q100= 10.9 cfs.

Basin EX-B contributes to Design Point X-2 and has an area of 2.75 acres consisting of roofs, concrete, and gravel, generating runoff amounts of Q5=9.0 cfs and Q100=17.2 cfs.

Basin EX-C contributes to Design Point X-4 and has an area of 0.75 acres consisting of roofs, concrete, and gravel, generating runoff amounts of Q5=3.3 cfs and Q100=6.4 cfs.

The Preliminary/Final Drainage Report for Powers Pointe, Filing No. 1, Nolte and Associates (1996) indicates that flow from Basin OS-1 was intended to be conveyed from the south end of Ainsworth Street westward to the public drainage way along Powers Boulevard via a curb and gutter channel. Field observations indicate that the curb and gutter channel was never constructed, thus the runoff from Basin OS-1 flows onto the undeveloped property at the south end of Ainsworth Street.

Basin OS-1 contributes to Design Point X-3 and has an area of 1.90 acres consisting of asphalt pavement and commercial areas, generating runoff amounts of Q5= 6.9 cfs and Q100= 13.0 cfs.

### **DEVELOPED DRAINAGE CONDITIONS**

The proposed changes include the construction of two additional storage buildings on the asphalt area at the southern end of the site along with the replacement of some of the existing adjacent asphalt and gravel with concrete. The combined area of disturbance is 0.98 acre. The imperviousness of the site remains essentially the same, with a slight increase due to less gravel area and greater roof/pavement area. The previously approved drainage report used land use coefficient (C) values of 0.80 or 0.90 for the developed portions of the site, which roughly corresponds to percent imperviousness of 95%-100%. The percent impervious for the proposed condition is approximately 98%.

The drainage patterns for the site will remain largely the same, with runoff continuing to flow into swales onsite and then flowing south and offsite onto the undeveloped area at the south end of the property. The proposed development will add an additional section of concrete swale, and riprap areas at the outfall of the onsite swales. The existing flow leaving the site to the south is Q5=14.8

cfs and Q100= 28.1 cfs, and the proposed flow leaving the site to the south is Q5= 16.1 cfs and Q100= 30.1 cfs. Per the previously approved drainage report for the site (Preliminary/Final Drainage Report for Powers Pointe, Filing No. 1, Nolte and Associates (1996)), the flow leaving the site was Q5= 17.8 cfs and Q100= 30.7 cfs (summation of Basins 1 2, 3, 5, and 6 flows).

The flow values in the previously approved drainage report and this report are different for the same areas due to different land use coefficients being used in the two report. The existing conditions in this report do not match the proposed conditions in the old report (some values are higher, while other are lower).

Basin PR-A contributes to Design Point 1 and has an area of 1.55 acres consisting of roof/pavement and gravel, generating runoff amounts of Q5= 5.9 cfs and Q100= 11.0 cfs.

Basin PR-B contributes to Design Point 2 and has an area of 1.62 acres consisting of roof/pavement and gravel, generating runoff amounts of Q5= 6.1 cfs and Q100= 11.4 cfs.

Basin PR-C contributes to Design Point 3 and has an area of 1.14 acres consisting of roof/pavement and gravel, generating runoff amounts of Q5= 4.1 cfs and Q100= 7.7 cfs.

Basin PR-D contributes to Design Point 4 and has an area of 0.09 acres consisting of roof/pavement and gravel, generating runoff amounts of Q5= 0.3 cfs and Q100= 0.7 cfs.

Basin OS-1 contributes to Design Point X-3 and has an area of 1.90 acres consisting of asphalt pavement and commercial areas, generating runoff amounts of Q5= 6.9 cfs and Q100= 13.0 cfs.

Basin EX-C contributes to Design Point X-4 and has an area of 0.75 acres consisting of roofs, concrete, and gravel, generating runoff amounts of Q5=3.3 cfs and Q100=6.4 cfs.

Please see detailed Hydrologic and Hydraulic calculations in the appendix.

### HYDROLOGIC AND HYDRAULIC CALCULATIONS

Hydrologic and Hydraulic calculations were performed using the El Paso County Storm Drainage Design Criteria Manual Volumes 1 & 2 latest editions. The Rational Method was used to estimate storm water runoff.

### FLOODPLAIN STATEMENT

No portion of this site is within a designated F.E.M.A. floodplain, as determined by Flood Insurance Rate Maps Nos. 08041C0751 G & 08041C0752 G dated December 7, 2018.

### WATER QUALITY AND DETENTION

This site is not part of a larger common plan of development and the combined area of ground disturbance associated with these improvements is less than an acre; therefore, water quality is not required.

The main criteria for detention requirements is that the manner or quantity of runoff does not increase or impact downstream properties. The proposed flow leaving the site to the south is Q5= 16.1 cfs and Q100= 30.1 cfs. Per the previously approved drainage report, the flow leaving the site was Q5= 17.8 cfs and Q100= 30.7 cfs. The proposed use and flow paths on the site are remaining similar to current conditions, so the manner of the runoff isn't changing. The proposed flows leaving the site to the south are less than those in the previously approved report, so the quantity of runoff isn't increasing from what has previously been approved. Based on this, detention is not required.

### **EROSION CONTROL**

An erosion control plan has been submitted along with this report.

### **CONSTRUCTION COST OPINION**

### **Public Non Reimbursable**

NOT APPLICABLE

### **Private Non Reimbursable**

Item	Quantity	Unit	<b>Unit Price</b>	Cost
Riprap (Type L)	27	Cu Yd	\$200	\$5,400
			Subtotal	\$5,400
Engineering Contingency	10%	Lump Sum		\$540
			Total	\$5,940

### **DRAINAGE FEES**

This site is not being platted. Drainage or bridge fees do not apply.

#### **MAINTENANCE**

The proposed erosion control measures will be repaired and maintained by the property owner or owner's representative as required.

### **SUMMARY**

Runoff from the A Storage Place development will not adversely affect the surrounding and downstream properties. Water quality measures are not required as the proposed improvements will disturb less than 1 acre and the site is not part of a larger common plan of development. The proposed expansion does not increase the manner or quantity of runoff above what was in the previously approved report; therefore, detention measures are not required for this project. No storm drainage modifications are necessary as a result of the A Storage Place development.

PREPARED BY: **TERRA NOVA ENGINEERING, INC.** 

L Ducett P.E. President Terra Nova Engineering, Inc.

### **BIBLIOGRAPHY**

Preliminary/Final Drainage Report for Powers Pointe, Filing No. 1, Nolte and Associates (1996)


El Paso County Drainage Criteria Manual-Volumes 1 & 2, latest edition

SCS Soils Map for El Paso County


Federal Emergency Management Agency (FEMA) flood maps

Sand Creek Drainage Basin Planning Study



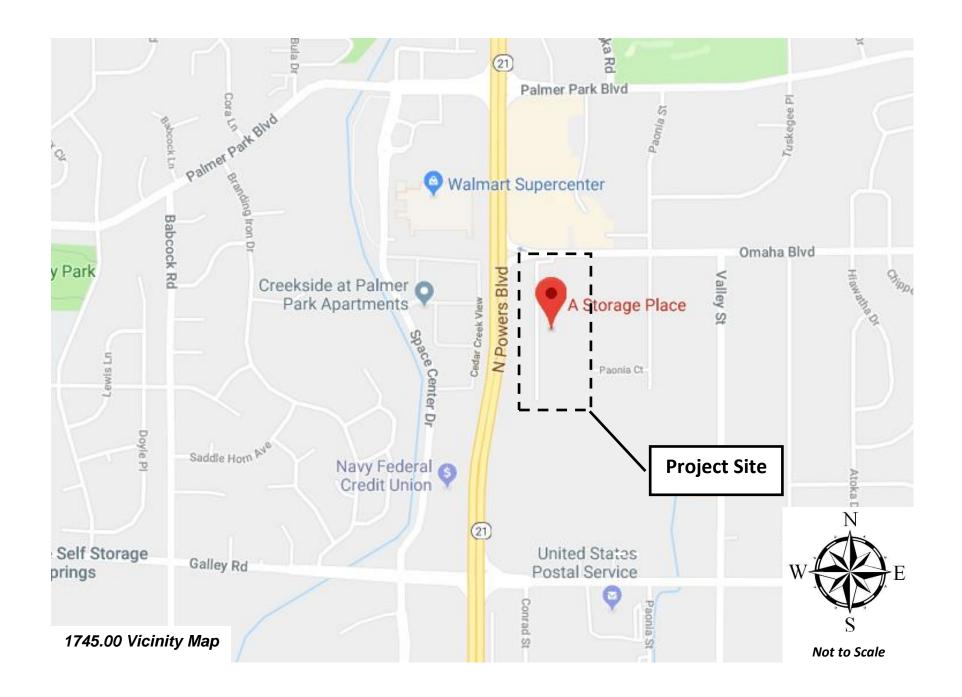





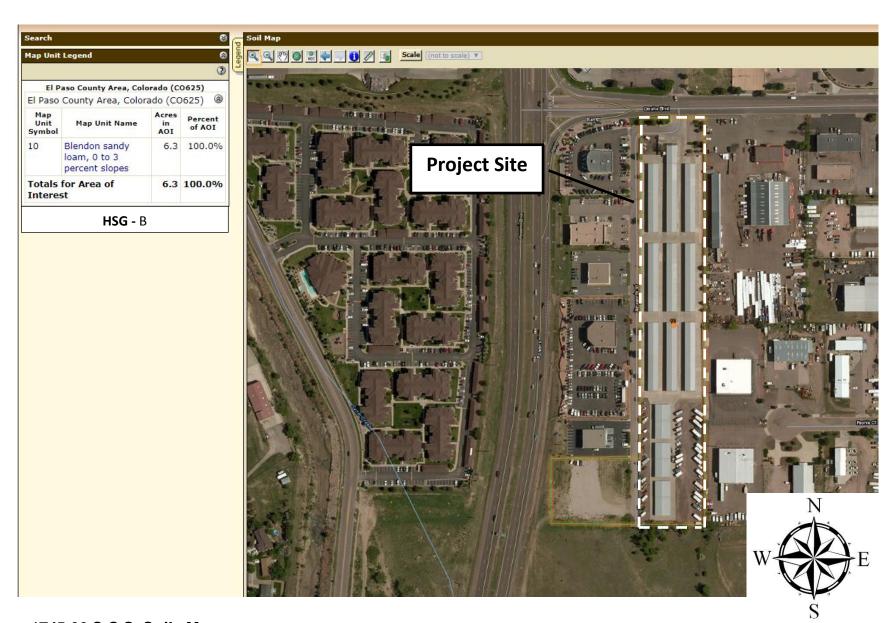

1745.00 S.C.S. Soils Map



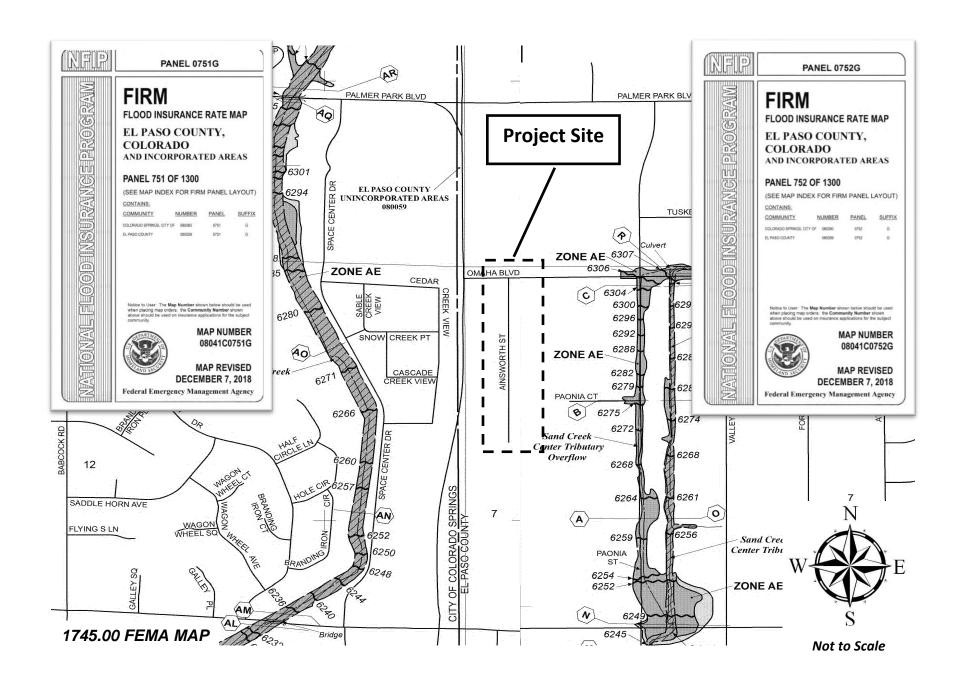



# 1745.00 A Storage Place, Colorado Springs (Area Runoff Coefficient Summary)

### **EXISTING CONDITIONS**

		PAVI	EMENT/R	OOF		GRAVEL	WEIGHTED		
BASIN	TOTAL AREA (Acres)	AREA (Acres)	C <sub>5</sub>	C <sub>100</sub>	AREA (Acres)	C <sub>5</sub>	C <sub>100</sub>	C <sub>5</sub>	C <sub>100</sub>
EX-A	1.64	1.35	0.90	0.96	0.29	0.59	0.70	0.85	0.91
EX-B	2.75	1.84	0.90	0.96	0.91	0.59	0.70	0.80	0.87
EX-C	0.75	0.68	0.90	0.96	0.07	0.59	0.70	0.87	0.94
		ì	Paved Street	t	Con	mmercial A	rea		
OS-1	1.90	0.81	0.90	0.96	1.09	0.81	0.88	0.85	0.91

### **DEVELOPED CONDITIONS**

		PAVI	EMENT/R	OOF		GRAVEL		WEIG	HTED
BASIN	TOTAL AREA (Acres)	AREA (Acres)	$C_5$	C <sub>100</sub>	AREA (Acres)	C <sub>5</sub>	C <sub>100</sub>	C <sub>5</sub>	C <sub>100</sub>
DD A	' '	` /	0.00	0.06	` '	0.50	0.70	0.00	0.05
PR-A	1.55	1.50	0.90	0.96	0.05	0.59	0.70	0.89	0.95
PR-B	1.62	1.55	0.90	0.96	0.07	0.59	0.70	0.89	0.95
PR-C	1.14	0.99	0.90	0.96	0.15	0.59	0.70	0.86	0.93
PR-D	0.09	0.05	0.90	0.96	0.04	0.59	0.70	0.76	0.84
			Paved Street	t	Con	mmercial A	rea		
OS-1	1.90	0.81	0.90	0.96	1.09	0.81	0.88	0.85	0.91
EX-C	0.75	0.68	0.90	0.96	0.07	0.59	0.70	0.87	0.94

Calculated by: DLF
Date: 3/2/2020
Checked by:

# 1745.00 A Storage Place, Colorado Springs AREA DRAINAGE SUMMARY

### **EXISTING CONDITIONS**

		WEIG	HTED		OVER	LAND		STRE	ET / CH	ANNEL F	LOW	$T_t$	INTE	VSITY	TOTAL 1	FLOWS
BASIN	AREA TOTAL	C <sub>5</sub>	C <sub>100</sub>	$C_5$	Length	Height	T <sub>C</sub>	Length	Slope	Velocity	T <sub>t</sub>	TOTAL	<b>I</b> <sub>5</sub>	I <sub>100</sub>	$Q_5$	Q <sub>100</sub>
	(Acres)	* For Calcs See	Runoff Summary		(ft)	(ft)	(min)	(ft)	(%)	(fps)	(min)	(min)	(in/hr)	(in/hr)	(c.f.s.)	(c.f.s.)
EX-A	1.64	0.85	0.91	0.85	64	5.0	1.9	1190	1.8%	2.7	7.3	9.3	4.2	7.3	5.8	10.9
EX-B	2.75	0.80	0.87	0.80	75	4.0	2.8	1124	1.8%	2.7	6.9	9.8	4.1	7.1	9.0	17.2
EX-C	0.75	0.87	0.94	0.87	75	4.0	2.1	200	1.8%	2.7	1.2	5.0	5.0	9.1	3.3	6.4
OS-1	1.90	0.85	0.91	0.85	12	0.2	1.3	1155	1.7%	2.6	7.4	8.7	4.3	7.5	6.9	13.0

### **DEVELOPED CONDITIONS**

		WEIG	HTED		OVER	LAND		STRE	ET / CH	ANNEL F	LOW	$T_t$	INTEN	VSITY	TOTAL I	FLOWS
BASIN	AREA TOTAL	$C_5$	C <sub>100</sub>	C <sub>5</sub>	Length	Height	$T_{C}$	Length	Slope	Velocity	$T_t$	TOTAL	$I_5$	I <sub>100</sub>	$Q_5$	$Q_{100}$
	(Acres)	* For Calcs See	Runoff Summary		(ft)	(ft)	(min)	(ft)	(%)	(fps)	(min)	(min)	(in/hr)	(in/hr)	(c.f.s.)	(c.f.s.)
PR-A	1.55	0.89	0.95	0.89	64	5.0	1.6	1170	1.8%	2.7	7.2	8.8	4.2	7.4	5.9	11.0
PR-B	1.62	0.89	0.95	0.89	75	4.0	2.0	1124	1.8%	2.7	6.9	8.9	4.2	7.4	6.1	11.4
PR-C	1.14	0.86	0.93	0.86	75	4.0	2.2	1124	1.8%	2.7	6.9	9.2	4.2	7.3	4.1	7.7
PR-D	0.09	0.76	0.84	0.76	15	3.0	0.9	0	0.0%	0.0	0.0	5.0	5.0	9.1	0.3	0.7
OS-1	1.90	0.85	0.91	0.85	12	0.2	1.3	1155	1.7%	2.6	7.4	8.7	4.3	7.5	6.9	13.0
EX-C	0.75	0.87	0.94	0.87	75	4.0	2.1	200	1.8%	2.7	1.2	5.0	5.0	9.1	3.3	6.4

Calculated by:	DLF
Date:	3/2/2020
Checked by:	

# 1745.00 A STORAGE PLACE Surface Routing


	EXISTING CONDITIONS									
	Maximum Intensity Flow									
Design Point(s)	Contributing Basins	Area (Acres)	Equivalent CA 5	Equivalent CA <sub>100</sub>		$I_5$	$I_{100}$	<b>Q</b> <sub>5</sub>	Q 100	
X-1	EX-A	1.64	1.39	1.50	9.3	4.2	7.3	5.8	10.9	
X-2	EX-B	2.75	2.19	2.40	9.8	4.1	7.1	9.0	17.2	
X-3	OS-1	1.90	1.61	1.74	8.7	4.3	7.5	6.9	13.0	
X-4	EX-C	0.75	0.65	0.70	5.0	5.0	9.1	3.3	6.4	


	PROPOSED CONDITIONS										
					Manianana	Inte	nsity	Flow			
Design Point(s)	Contributing Basins	Area (Acres)	Equivalent CA 5	Equivalent CA <sub>100</sub>	Maximum T <sub>C</sub>	$I_5$	$I_{100}$	<b>Q</b> <sub>5</sub>	Q 100		
1	PR-A	1.55	1.38	1.48	8.8	4.2	7.4	5.9	11.0		
2	PR-B	1.62	1.44	1.54	8.9	4.2	7.4	6.1	11.4		
3	PR-C	1.14	0.98	1.06	9.2	4.2	7.3	4.1	7.7		
4	PR-D	0.09	0.07	0.08	5.0	5.0	9.1	0.3	0.7		
X-3	EX-C,PR-D,OS-1	2.74						10.5	20.0		
X-4	EX-C	0.75	0.65	0.70	5.0	5.0	9.1	3.3	6.4		
									·		


Calculated by: DLF
Date: 7/28/2020
Checked by:


1745.00 A Storage Place Summary of Proposed Aisle Flow Capacities Dane Frank 03/04/20


	Required	Min Capacity	Min Capacity in Rise		
Aisle in	Capacity	from Valley	from Concrete to	<b>Combined Min</b>	
Basin	(cfs)	Section (cfs)	Finish Floor (cfs)	Capacity (cfs)	Notes
PR-A	11.0	2.2	35.6	37.8	
PR-B	11.4	0.0	30.6	30.6	No valley section capacity due to grading of existing concrete.
PR-C	7.7	11.6	31.9	43.5	

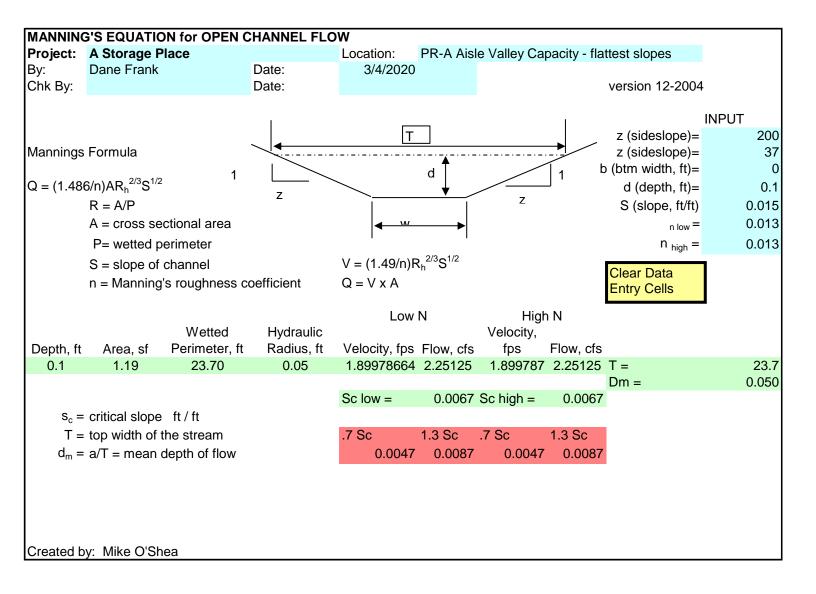


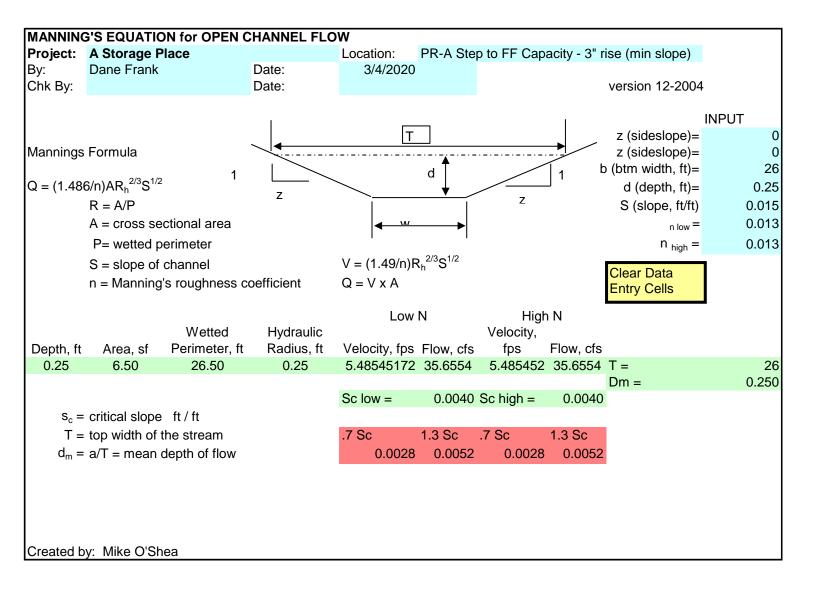

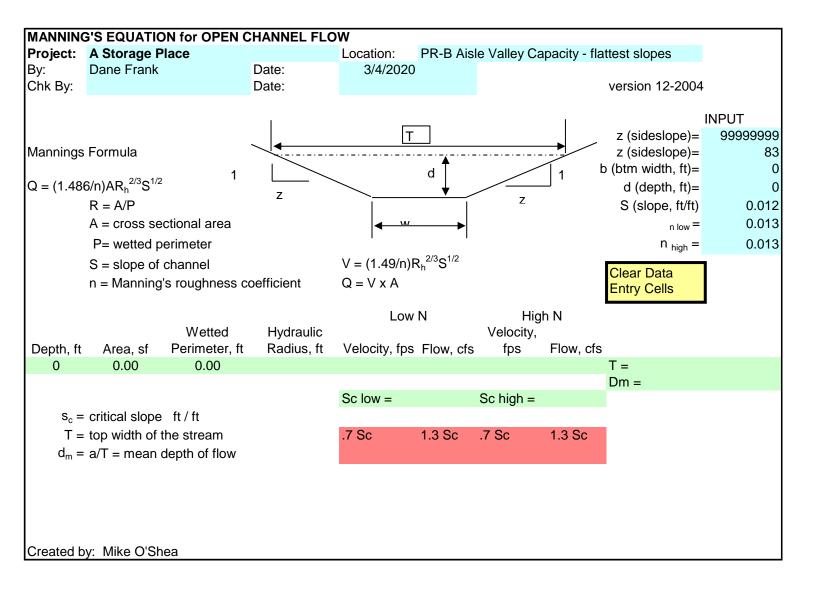

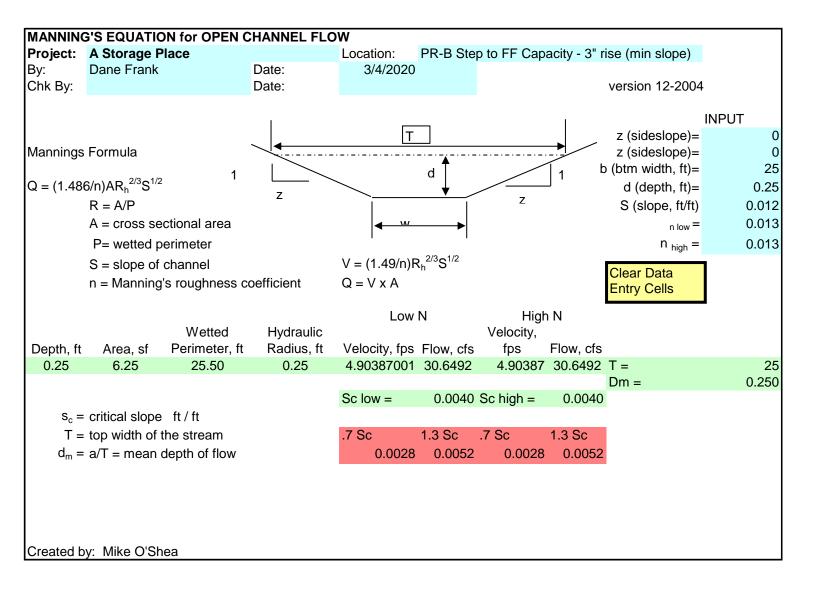

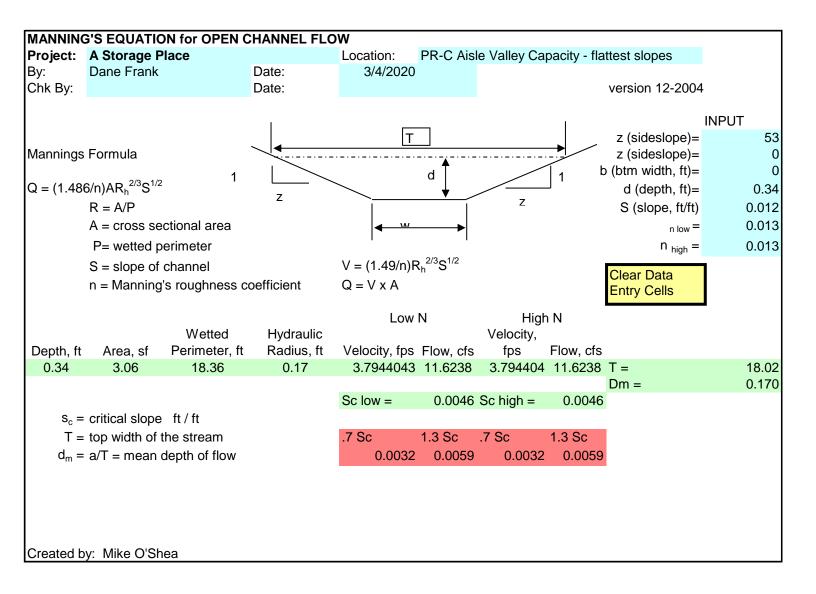

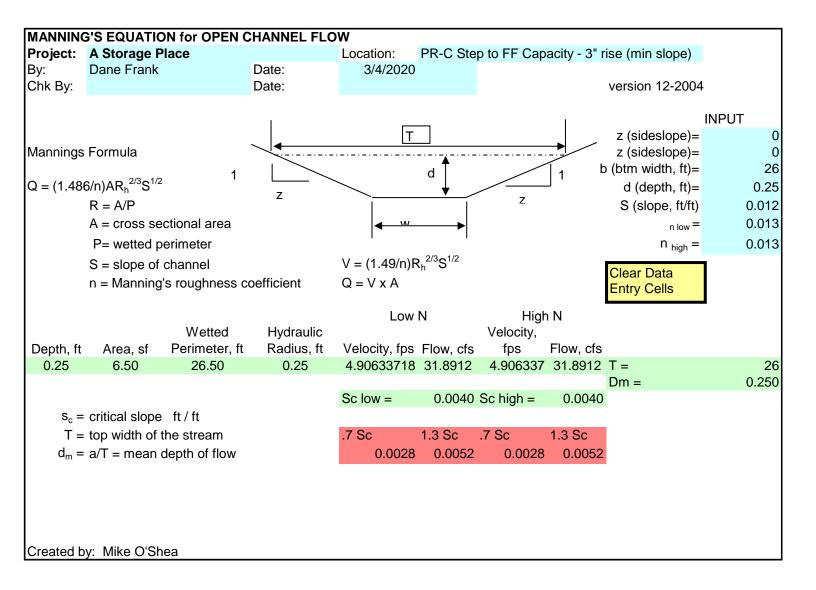

1745.00 A Storage Place Riprap Sizing Calculations Dane Frank 06/23/20

$$d_{50} \ge \left[ \frac{VS^{0.17}}{4.5(G_s - 1)^{0.66}} \right]^2$$

d50 = mean rock size (ft)

V = mean channel velocity (ft/s)

S = longitudinal channel slope (ft/ft)

Gs = specific gravity of stone (min = 2.50, typically 2.5 to 2.7)

V and S values are referenced from Manning Equation spreadsheets

<u>Location</u>	<u>V</u>	<u>s</u>	<u>Gs</u>	<u>d50 (ft)</u>	<u>d50 (in)</u>
Design Point 1 Riprap	1.900	0.015	2.5	0.025	0.300
Design Point 2 Riprap	4.904	0.012	2.5	0.155	1.855
Design Point 3 Riprap	3.794	0.012	2.5	0.093	1.111



#### **CALCULATIONS**

### POWERS POINTE - PRELIM. / FINAL DRAINAGE REPORT

May, 1996

### Historic Flow Exhibit

Terra Nova Engineering notes are in blue

- Dane Frank, Terra Nova, 2020/06/25

### LAND USE COEFFICIENTS

BASIN	C(5)	C(100)	
1	0.90	0.90	
2	0.90	0.90	
3	0.90	0.90	
4	0.90	0.90	
5	0.80	0.80	C(5)/(100) = ((0.40)(0.60) + (0.52)(0.90))/0.92 = 0.77  Say  0.80
6	0.90	0.80	•
7	0.90	0.90	
OS-1	0.90	0.90	
OS-2/3	0.70	0.70	C(5)/(100) = ((1.3)(0.30) + (2.4)(0.90))/3.7 = 0.69  Say  0.70

### **BASIN CALCULATIONS**

#### **BASIN 1**

Tc w/in Landscaped Area =  $1.87(1.1-0.60)(95)^0.5(5.0)^-0.33 = 5.4$  min.

Tc south within concrete swale (700' @ V=5 f.p.s.) = 700/(5)(60) = 2.3 min.

Tc total = 5.4 + 2.3 = 7.7 min. Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(0.68+0.30) = 3.6 c.f.s.

Q(100) = (0.90)(7.0)(0.68+0.30) = 6.2 c.f.s.

#### **BASIN 2**

Tc) Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(0.86) = 3.1 c.f.s.

Q(100) = (0.90)(7.0)(0.86) = 5.4 c.f.s.

These basin calculations appear to include calculations for both individual basins and design points with flow from multiple basins.

### **BASIN 3**

Tc) Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(0.84) = 3.1 c.f.s.

Q(100) = (0.90)(7.0)(0.84) = 5.4 c.f.s.

#### **BASIN 4**

Tc w/in Lscape setback next to Omaha =  $1.87(1.1-.25)(2)^{(-0.33)(40)^{(.5)}} = 5.9$  min.

Tc from Lscape to access road (100' @ V=5 f.p.s.) = 100/(5\*60) = 0.3 min.

Tc within access road south to PL (520' @ V=5 f.p.s.) = 520/(5\*60) = 1.7 min.

Tc total = 5.9 + 0.3 + 1.7 = 7.9 min. (use 10 minute Tc)

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(3.70) = 13.5 c.f.s.

Q(100) = (0.90)(7.0)(3.70) = 23.3 c.f.s.

### **BASIN OS-2**

Tc w/in Omaha Curbline (S=1%)=1,400'/(3.5)(60)=6.7 min.

Tc w/in ditch with S = 2%, Sideslopes of 5:1, n = 0.035, Q = 6 c.f.s., V = 4 f.p.s.

Tc = (470')/(4)(60) = 2.0 min.

Tc total = 6.7 + 2.0 = 8.7 min. Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.70)(4.05)(2.2) = 6.2 c.f.s.

Q(100) = (0.70)(7.0)(2.2) = 10.8 c.f.s.

### **CALCULATIONS**

#### POWER POINTE PRELIM. / FINAL DRAINAGE REPORT

May, 1996

## BASIN 4 & OS2 (Flow w/in Powers Ditch) — This is a design point with flow from multiple basins.

Tc) Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(3.70) + (0.70)(4.05)(2.2) = 19.7 c.f.s.

Q(100) = (0.90)(7.0)(3.70) + (0.70)(7.0)(2.2) = 34.1 c.f.s.

(see Open Channel Calculations - attached)

#### **BASIN 5**

Tc across compacted earth =  $1.87(1.1-0.60)(400)^0.5(3.0)^-0.33 = 13.0$  min.

Tc total = 10.0 + 13.0 = 23.0 min. (10 min. from Basin no. 1)

I(5) = 2.75 in./hr. I(100) = 4.75 in./hr.

SUM (CA)5 = (0.90)(0.98) + (0.80)(0.92) = 2.39

SUM (CA)100 = (0.90)(0.98) + (0.80)(0.92) = 2.39

Q(5) = SUM (CA) \* I(5) = 2.39(2.75) = 6.6 c.f.s.

Q(100) = SUM(CA) \*I(100) = 2.39(4.75) = 11.4 c.f.s.

#### **BASIN 6**

Tc) Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(0.37) = 1.4 c.f.s.

Q(100) = (0.90)(7.0)(0.37) = 2.3 c.f.s.

#### **BASIN 7**

Tc) Use 10 minute minimum.

I(5) = 4.05 in./hr. I(100) = 7.0 in./hr.

Q(5) = (0.90)(4.05)(2.80) = 10.2 c.f.s.

Q(100) = (0.90)(7.0)(2.80) = 17.6 c.f.s.

## BASINS 7, 4, OS-2,3 — This is a design point with flow from multiple basins.

CA(5)/(100) = (0.90)(3.7 + 2.8) + (0.70)(2.2 + 1.5) = 8.16

Tc at southerly end of ditch next to proposed subdivision....

Tc = 10 min. + (580')/(4)(60) = 12.4 min.

I(5) = 3.8 in./hr. I(100) = 6.3 in./hr.

Q(5) = (8.16)(3.8) = 31.0 c.f.s.

Q(100) = (8.16)(6.3) = 51.4 c.f.s.

## For road side ditch capacity calculations see Trapezoidal Channel


Analysis and Design Worksheets, attached.

### Flow Leaving the Site Across the South Property Line

The drainage map shows Basins 1, 2, 3, 5, and 6 all drain south with runoff from these basins leaving the site at the south property line. The combined runoff from these basins is:

Q5 = 3.6 + 3.1 + 3.1 + 6.6 + 1.4 = 17.8 cfs

Q100 = 6.2 + 5.4 + 5.4 + 11.4 + 2.3 = 30.7 cfs

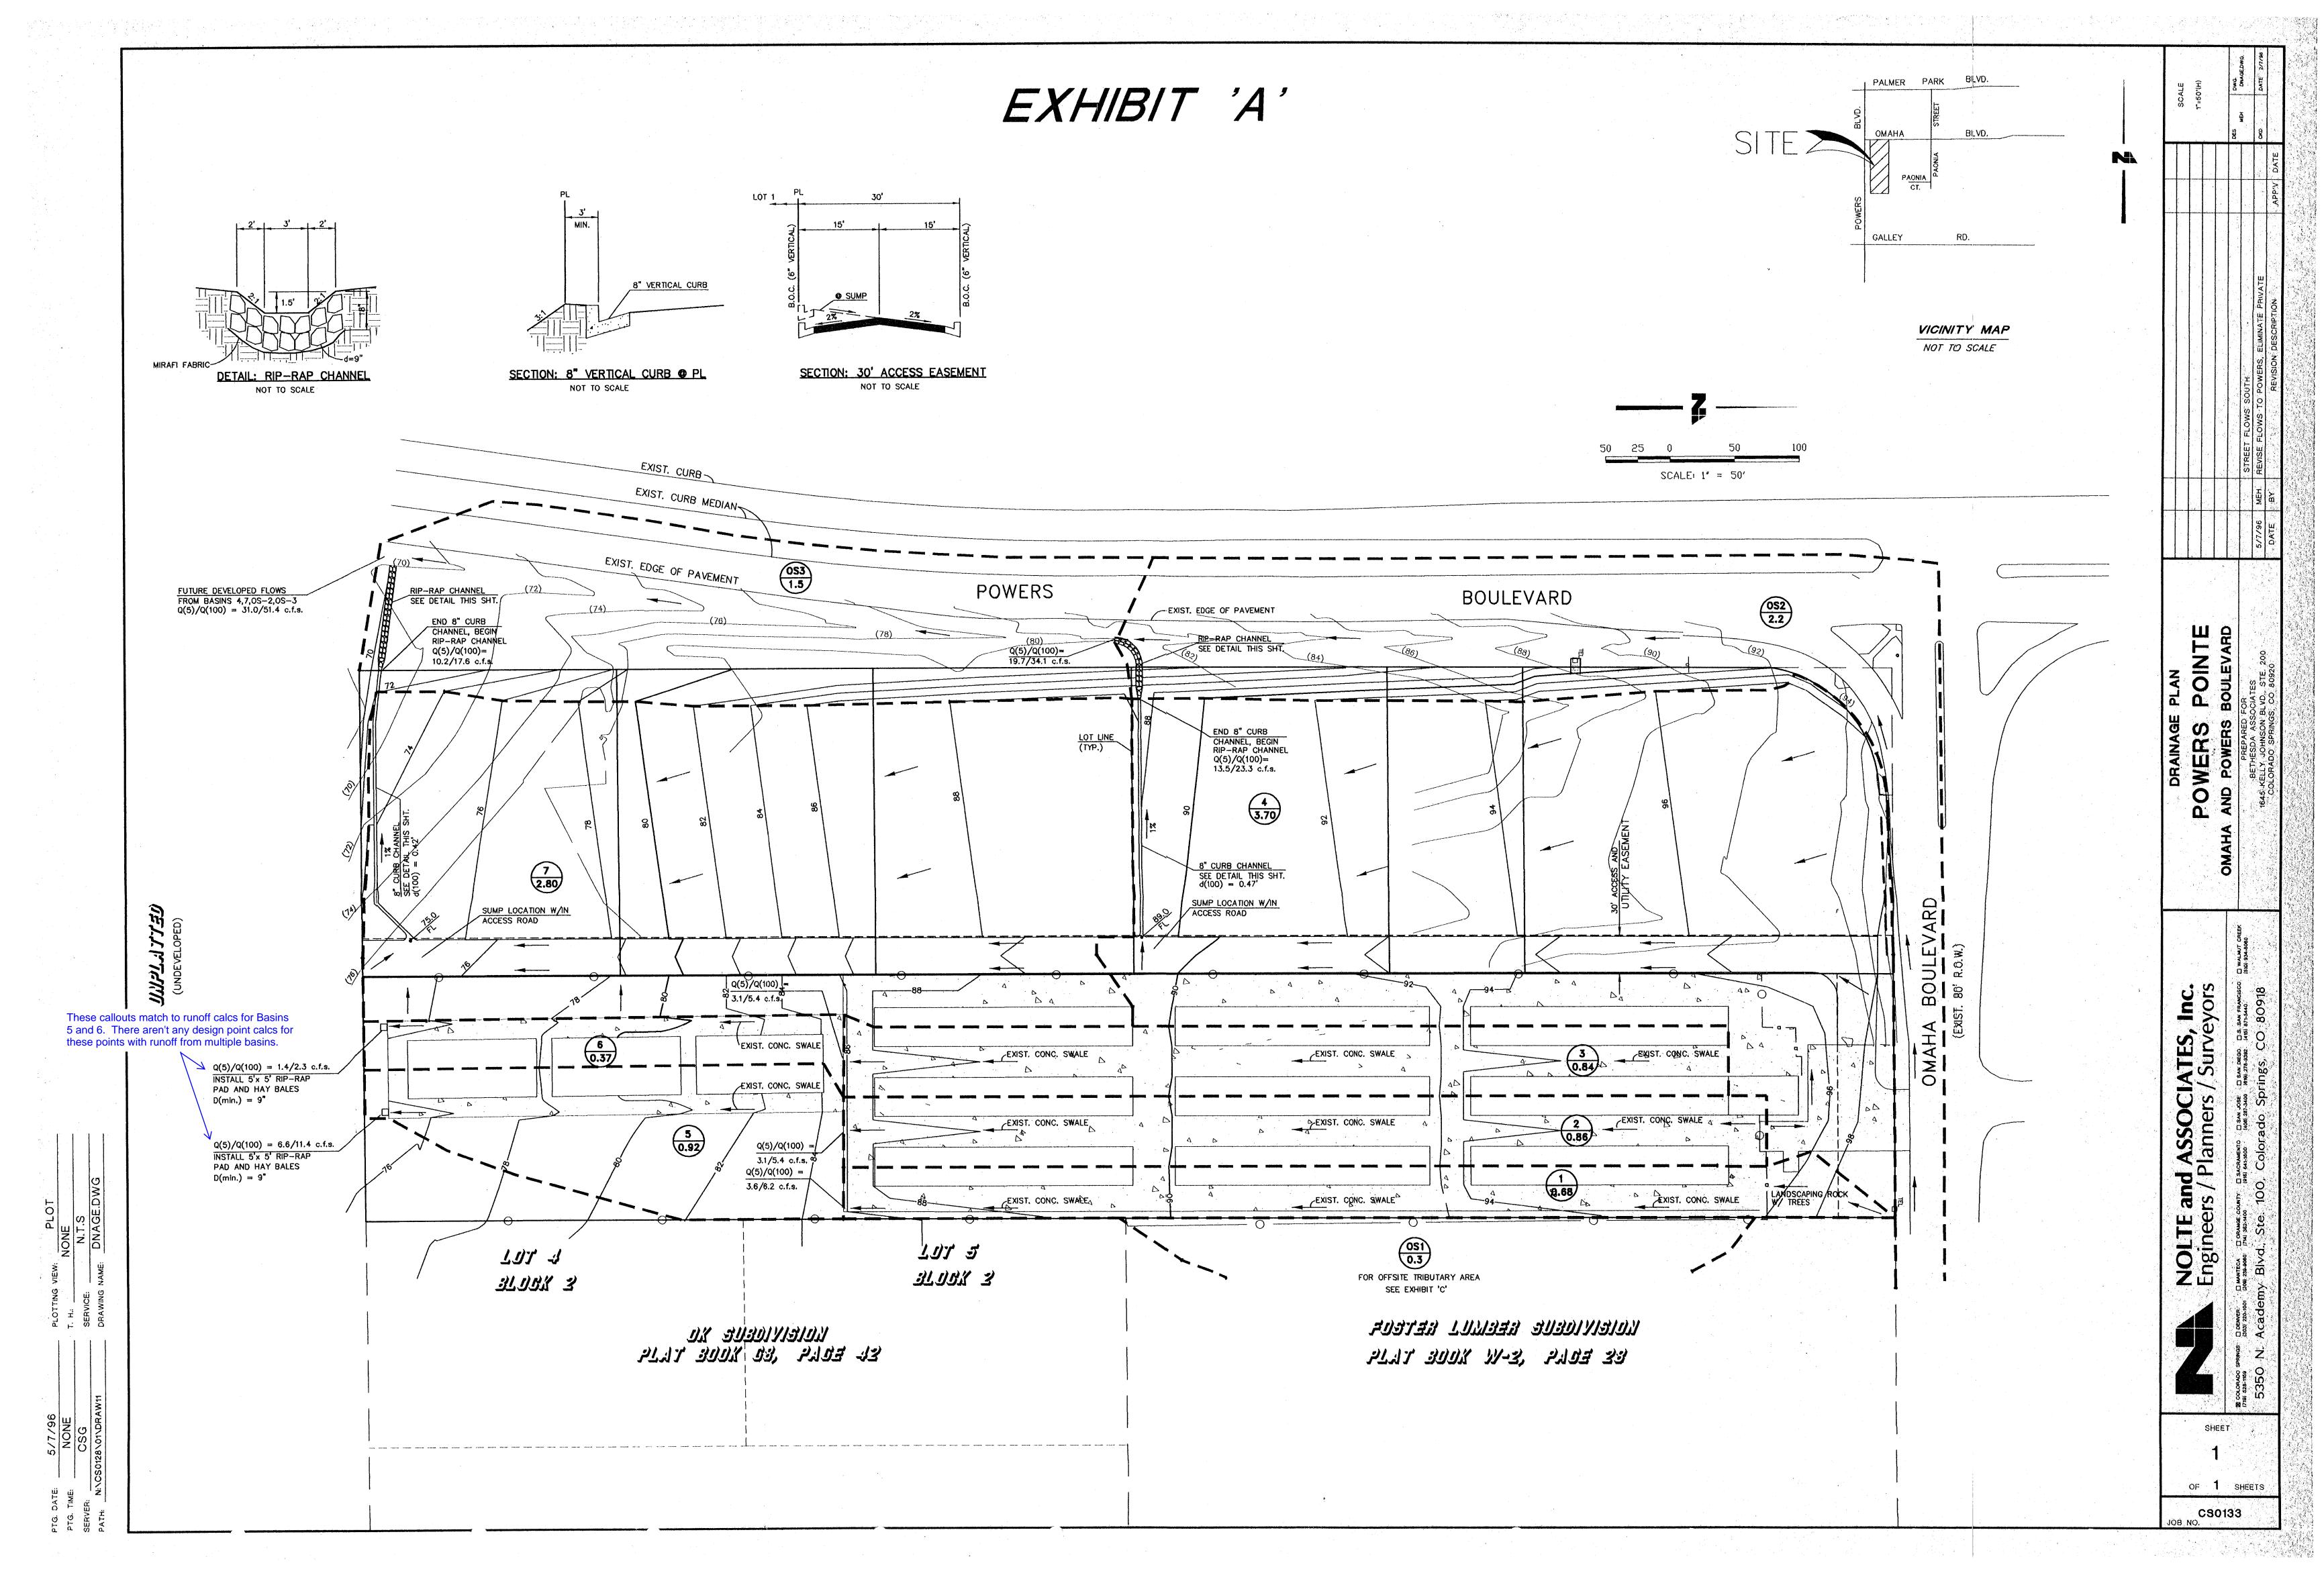



DRNG.dwg,


GRADING LEGEND


721 S. 23RD ST. COLORADO SPRINGS, CO. 80904

OFFICE: 719-635-6422 FAX: 719-635-6426 www.tnesinc.com

DRAINAGE LEGEND







2020/06/25

**EXISTING** DRAINAGE

DRAINAGE LEGEND

COLORADO SPRINGS, CO. 80904 OFFICE: 719-635-6422

721 S. 23RD ST.

FAX: 719-635-6426 www.tnesinc.com

\_\_\_\_ BASIN DESIGNATION \_\_\_ AREA IN BASIN (AC)

Scale: 1 inch = 40 feet

GRADING LEGEND

EXISTING CONTOURS - MINOR

Design Develop Consultants @

2020/07/28 CHECKED DRAWN BY

**PROPOSED** DRAINAGE