

TRAFFIC IMPACT STUDY

For

**Cathedral Rock Commons
El Paso County, Colorado
PCD File No. P-21-001**

January 2022
Revised:
April 2022

Prepared for:

YOW Architects
115 S. Weber Street, Suite 200
Colorado Springs, Colorado 80903

Prepared by:



8703 Yates Drive, Suite 210
Westminster, Colorado 80031
(303) 458-9798

6 South Tejon Street, Suite 515
Colorado Springs, Colorado 80903
(719) 203-6639

Project Engineer:
Brandon Wilson, EIT

Engineer in Responsible Charge:
Fred Lantz, PE



21-051432

Traffic Engineer's Statement

The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.



Fred Lantz, P.E. #23410

April 22, 2022

Date

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

Brad Nichols, Planner
YOW Architects
115 S. Weber Street, Suite 200
Colorado Springs, CO 80903

Date

Table of Contents	Page
I. Introduction	1
Project Overview.....	1
Study Area Boundaries	1
Site Description.....	1
Existing and Committed Surface Transportation Network.....	5
II. Existing Traffic Conditions	6
Existing Traffic Analysis Results	8
III. Future Traffic Conditions Without Proposed Development.....	9
Background Traffic Analysis Results – Year 2023	12
Background Traffic Analysis Results – Year 2040	13
IV. Proposed Project Traffic	14
Trip Generation.....	14
Adjustments to Trip Generation Rates	15
Trip Distribution.....	16
Trip Assignment.....	16
V. Future Traffic Conditions With Proposed Developments.....	18
VI. Project Impacts	21
Peak Hour Intersection Levels of Service	21
Total Traffic Analysis Results Upon Development Build-Out	22
Potential Public Improvements.....	23
Queue Length Analysis.....	24
Auxiliary Lane Analysis	24
VII. Conclusion	25

List of Figures	Page
Figure 1 – Location.....	3
Figure 2 – Site Plan.....	4
Figure 3 – Existing Traffic Volumes	7
Figure 4 – Background Traffic Volumes – Year 2023	10
Figure 5 – Background Traffic Volumes – Year 2040	11
Figure 6 – Distribution and Site Generated Assignment.....	17
Figure 7 – Total Traffic Volumes – Year 2023	19
Figure 8 – Total Traffic Volumes – Year 2040	20

List of Tables	Page
Table 1 – Intersection Capacity Analysis Summary – Existing Traffic	8
Table 2 – Intersection Capacity Analysis Summary – Background Traffic – Year 2023	12
Table 3 – Intersection Capacity Analysis Summary – Background Traffic – Year 2040	13
Table 4 – Trip Generation Rates	14
Table 5 – Trip Generation Summary	15
Table 6 – Trip Generation Summary with Reductions	16
Table 7 – Intersection Capacity Analysis Summary – Total Traffic – Year 2023	21
Table 8 – Intersection Capacity Analysis Summary – Total Traffic – Year 2040	22
Table 9 – Potential Public Improvements	23

Appendices

APPENDIX A	TRAFFIC COUNT DATA
APPENDIX B	INTERNAL CAPTURE WORKSHEETS
APPENDIX C	LEVEL OF SERVICE DEFINITIONS
APPENDIX D	CAPACITY WORKSHEETS

I. Introduction

Project Overview

This traffic impact study is provided as a planning document and addresses the capacity, geometric, and control requirements associated with the development entitled Cathedral Rock Commons.

This traffic impact study has been revised to address County review comments made to the previous Cathedral Rock Commons Traffic Impact Study, dated January 2022, regarding inclusion of the North Gate Boulevard with Struthers Road intersection and updates to assumed site-generated distribution patterns.

This proposed mixed-use development consists of multifamily residential, institutional, and retail land uses. The development is located near the east corner of Struthers Road and Spanish Bit Drive in El Paso County, Colorado.

Study Area Boundaries

The study area to be examined in this analysis was coordinated with County Staff and encompasses Struthers Road north to W Baptist Road and south to North Gate Boulevard, and Spanish Bit Drive from Struthers Road east to proposed site accesses.

Figure 1 illustrates location of the site and study intersections.

Unresolved. Please remove all statements that say "coordinated with County Staff", per review 1.

Site Description


Land for the development is currently vacant and zoned as CC (Commercial Community) and R-4 (an obsolete zoning district previously allowing medium density residential). The proposed development will rezone the obsolete R-4 district area to RM-30 (Residential Multi-Dwelling), allowing for a variety of multifamily residential, personal care, and institutional land uses. The area is surrounded by a mix of open space, retail, and residential land uses.

South of Spanish Bit Drive, the proposed development is understood to entail the new construction of 120 multifamily residential dwelling units and an approximately 10,000 square foot day care center. The proposed retail development north of Spanish Bit Drive is conceptual and no specific land uses have been determined. However, for purposes of this analysis, development north of Spanish Bit Drive is assumed to entail a maximum of approximately 29,000 square feet of shopping center.

Proposed access to the development is provided at the following locations: one full-movement access approximately 270 feet east of Struthers Road serving the southern area of development (referred to as Access A), one four-legged intersection on Spanish Bit Drive at the existing Big R Stores site access (referred to as Access B), and one full-movement intersection on Spanish Bit Drive approximately 340 feet east of the existing Big R Stores site access (referred to as Access C).

It is anticipated that development construction would be phased. Phase One is understood to consist of the multifamily and day care center land uses south of Spanish Bit Drive, and Phase Two will consist of the proposed retail land uses north of Spanish Bit Drive. For purposes of this analysis, it is assumed that overall development build-out would be completed by end of Year 2023.

A rezone map, as prepared by YOW Architects, is shown on Figure 2. This plan is provided for illustrative purposes only.

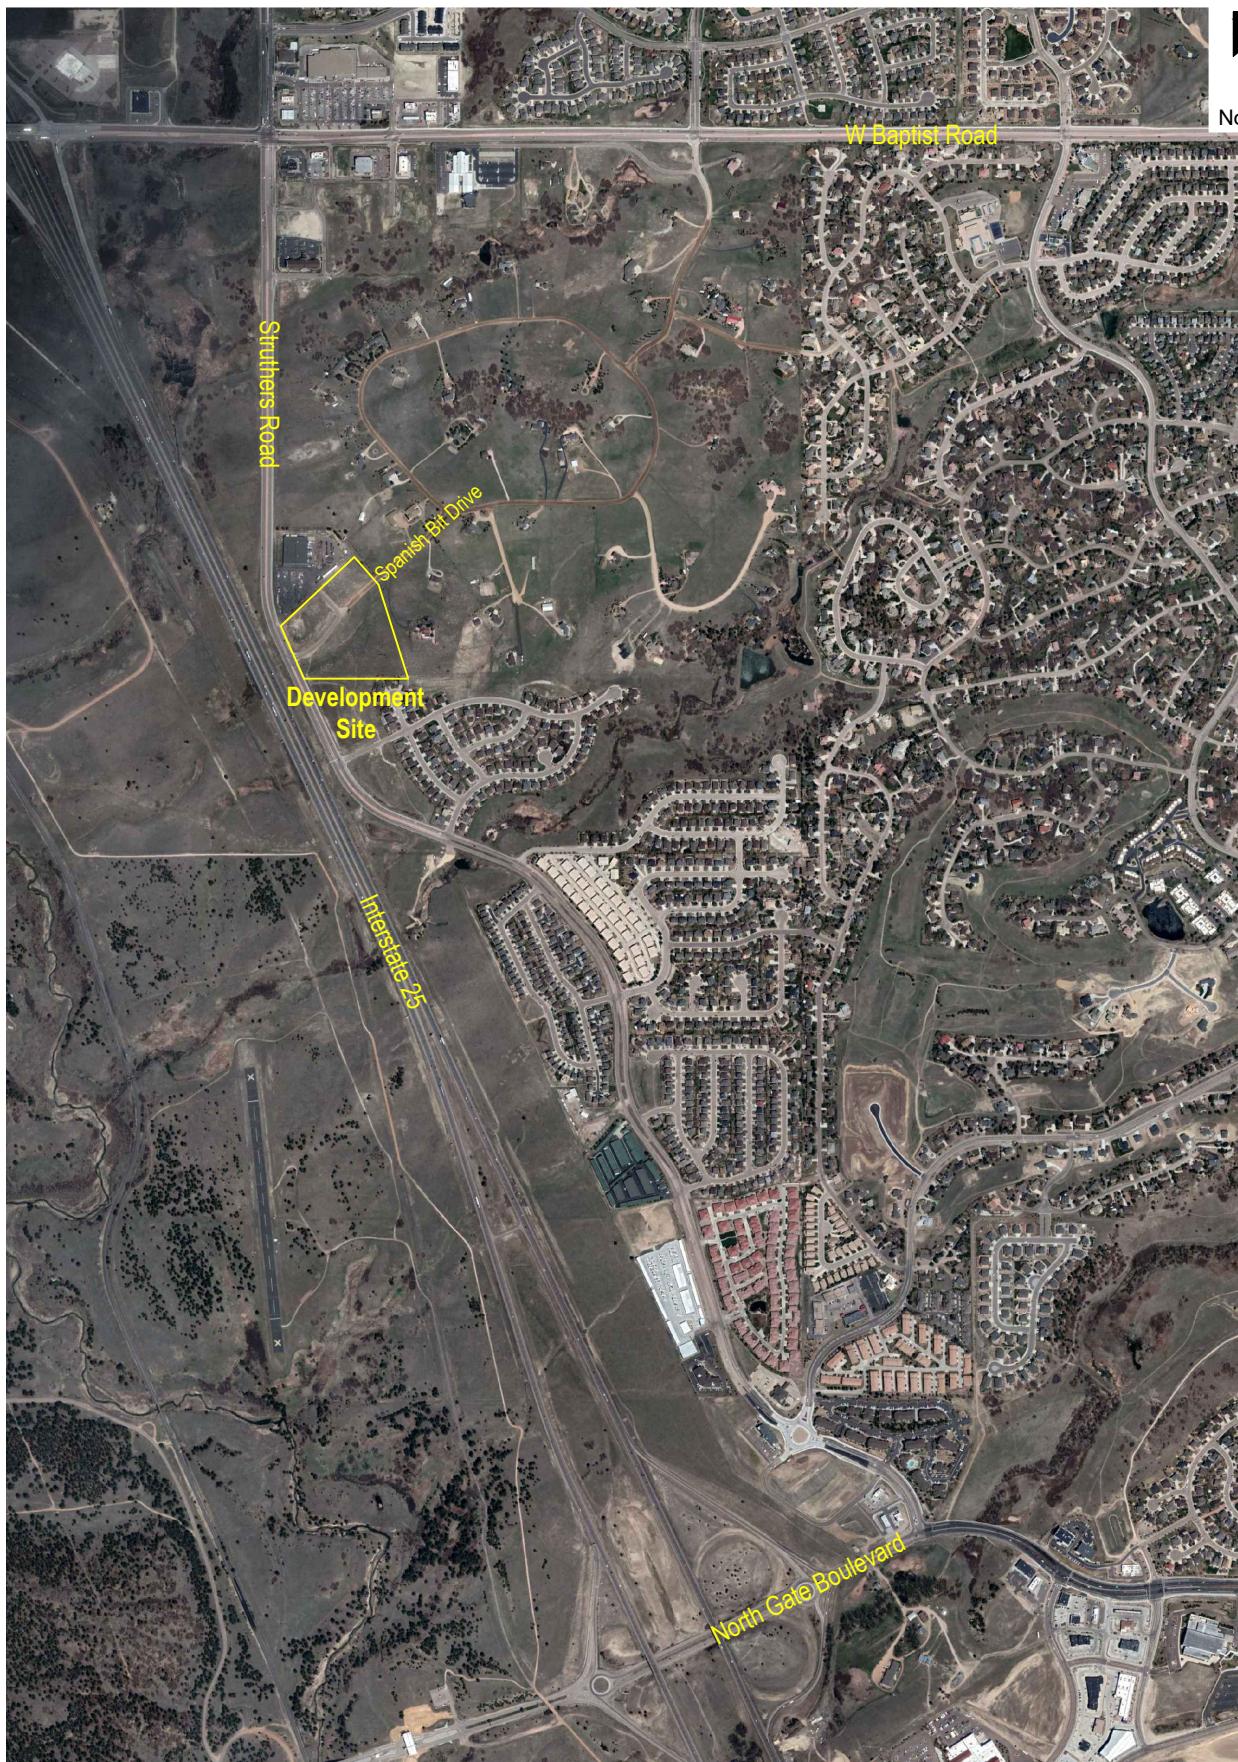

CATHEDRAL ROCK COMMONS

Traffic Impact Study

SM ROCHA, LLC

Traffic and Transportation Consultants


Figure 1
SITE LOCATION

April 2022

Page 3



Not to Scale

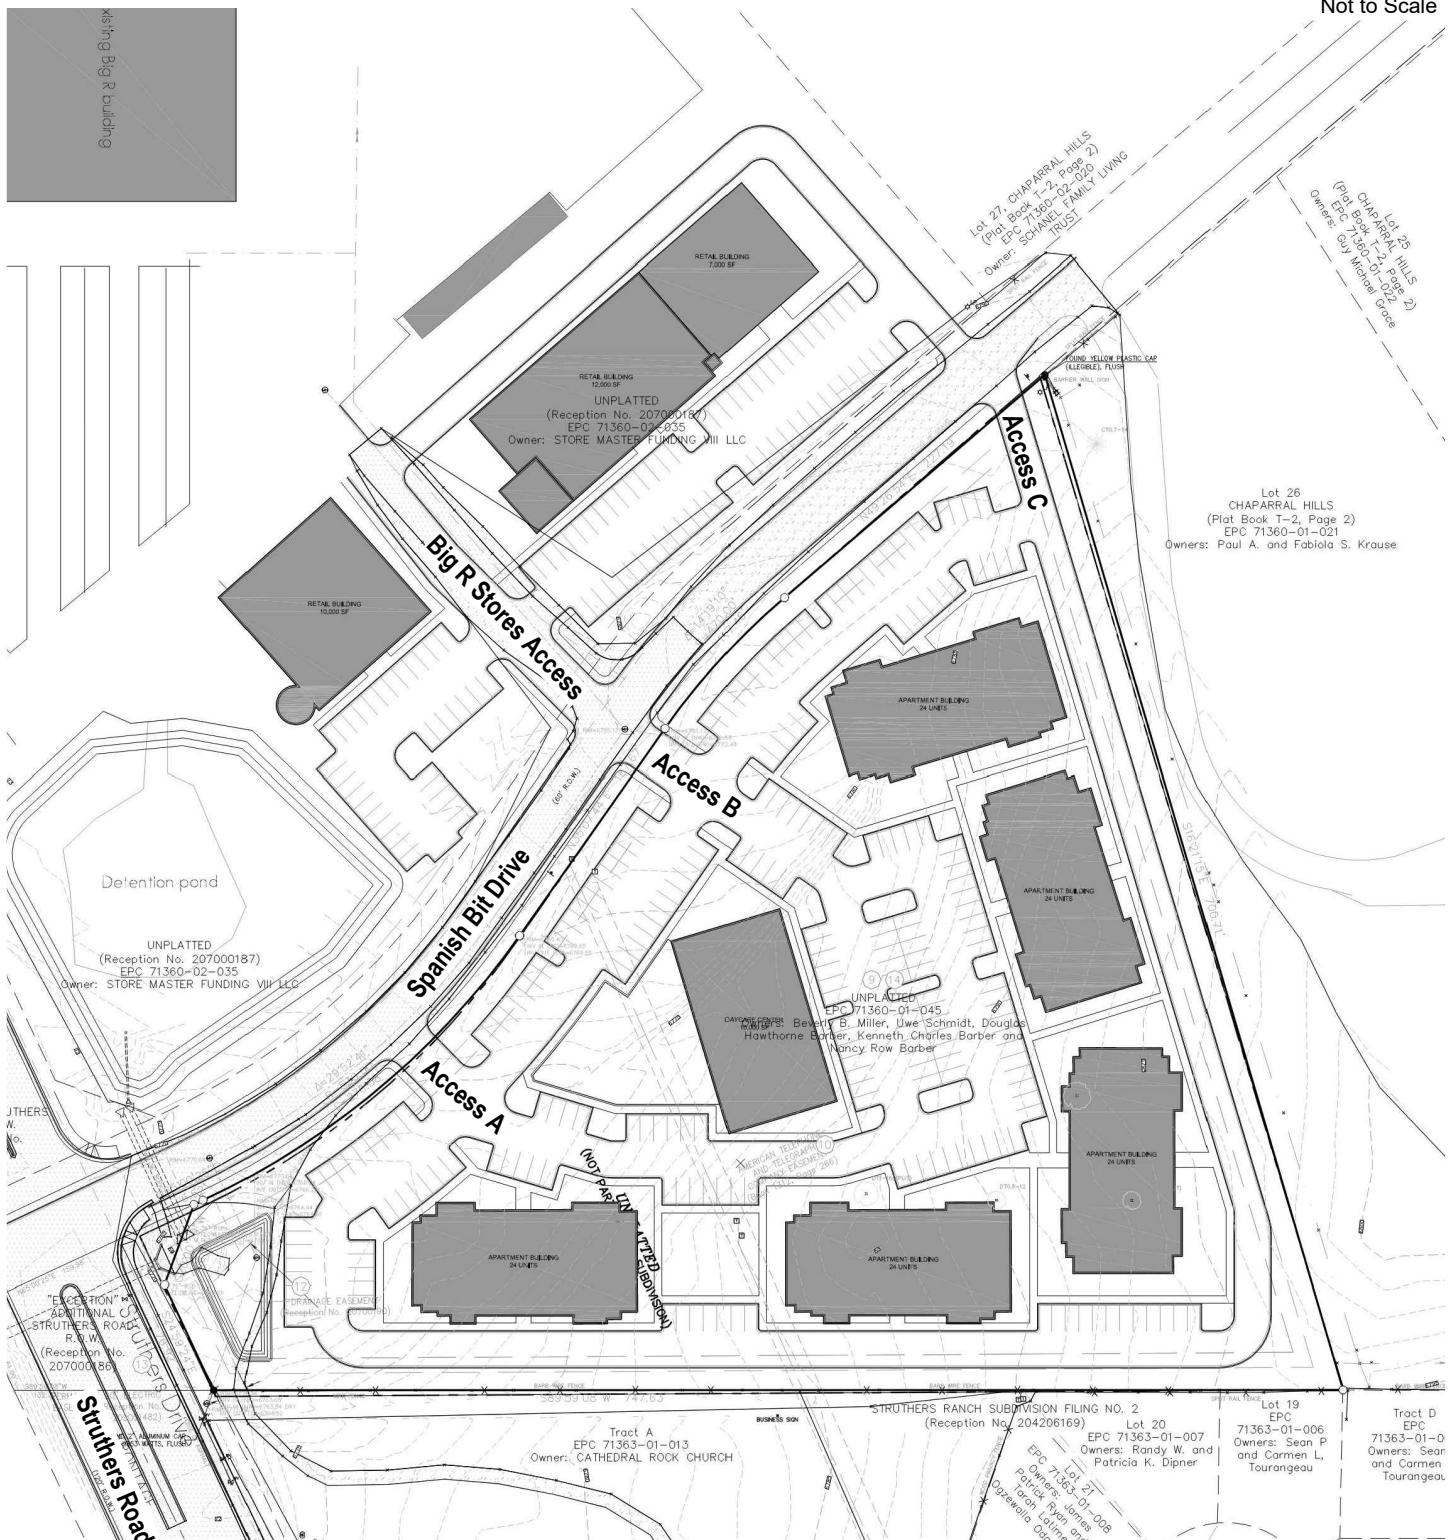

CATHEDRAL ROCK COMMONS

Traffic Impact Study



SM ROCHA, LLC

Traffic and Transportation Consultants

Figure 2
SITE PLAN

April 2022

Page 4

Existing and Committed Surface Transportation Network

Within the study area, Struthers Road is the primary roadway that will accommodate traffic to and from the proposed development. Secondary roadways include W Baptist Road and Spanish Bit Drive. A brief description of each roadway is provided below:

Struthers Road is a north-south minor arterial roadway having four through lanes (two lanes in each direction) with a combination of shared and exclusive turn lanes at the intersections within the study area. Struthers Road provides a posted speed limit of 45 MPH. Struthers Road ends at W Baptist Road and continues north as Jackson Creek Parkway.

W Baptist Road is an east-west principal arterial roadway having four to six through lanes (two to three lanes in each direction) with exclusive turn lanes at the intersection within the study area. W Baptist Road provides a posted speed limit of 45 MPH.

Spanish Bit Drive is an east-west rural local roadway having two through lanes (one lane in each direction) with a shared turn lanes at the intersections within the study area. Spanish Bit Drive is a paved roadway at its intersection with Struthers Road but becomes a gravel roadway east of the Big R Stores access drive. Spanish Bit Drive provides a posted speed limit of 25 MPH.

North Gate Boulevard is an east-west principal arterial roadway having four through lanes (two lanes in each direction) with exclusive turn lanes at the intersection within the study area. North Gate Boulevard provides a posted speed limit of 40 MPH.

The study intersection of W Baptist Road with Struthers Road is signalized. All other study intersections operate under a stop-controlled condition. A stop-controlled intersection is defined as a roadway intersection where vehicle rights-of-way are controlled by one or more “STOP” signs.

Pursuant to the El Paso County 2016 Major Transportation Corridors Plan Update (MTCP)¹, no regional or specific improvements for the roadways described above are known to be planned or committed at this time.

¹ El Paso County 2016 Major Transportation Corridors Plan Update, Felsburg Holt & Ullevig, December 2016.

II. Existing Traffic Conditions

Morning (AM) and afternoon (PM) peak hour traffic counts were collected at the Struthers Road intersections with W Baptist Road and Spanish Bit Drive, as well as the intersection of Spanish Bit Drive with the existing site access for Big R Stores. Average daily (24-hour) traffic volumes were collected on Struthers Road. These counts are shown on Figure 3.

At the direction of County Staff, peak hour traffic counts shown for the North Gate Boulevard and Struthers Road intersection were obtained from the Academy Gateway Updated Traffic Impact Analysis². These referenced counts were then grown to Year 2021 at a conservative annual growth of two percent.

It is noted that a significant number of U-turn vehicles are present at the intersection W Baptist Road with Struthers Road. These are shown separately in Figure 3; however, it is understood that these U-turns utilize the existing westbound left-turn lane.

Traffic count data is included for reference in Appendix A.

In coordination with County Staff, existing signal timing parameters for the Struthers Road intersections with W Baptist Road and North Gate Boulevard were assumed based on the existing signal head configuration, allowable movements, and pursuant to typical timing data described within the County's Engineering Criteria Manual (ECM)³. Timings were used throughout this study to the best extent possible in order to remain consistent with typical County signal coordination plans.

² Academy Gateway: Updated Traffic Impact Analysis, LSC Transportation Consultants, Inc., July 2015.

³ El Paso County Engineering Criteria Manual, El Paso County, October 2020.

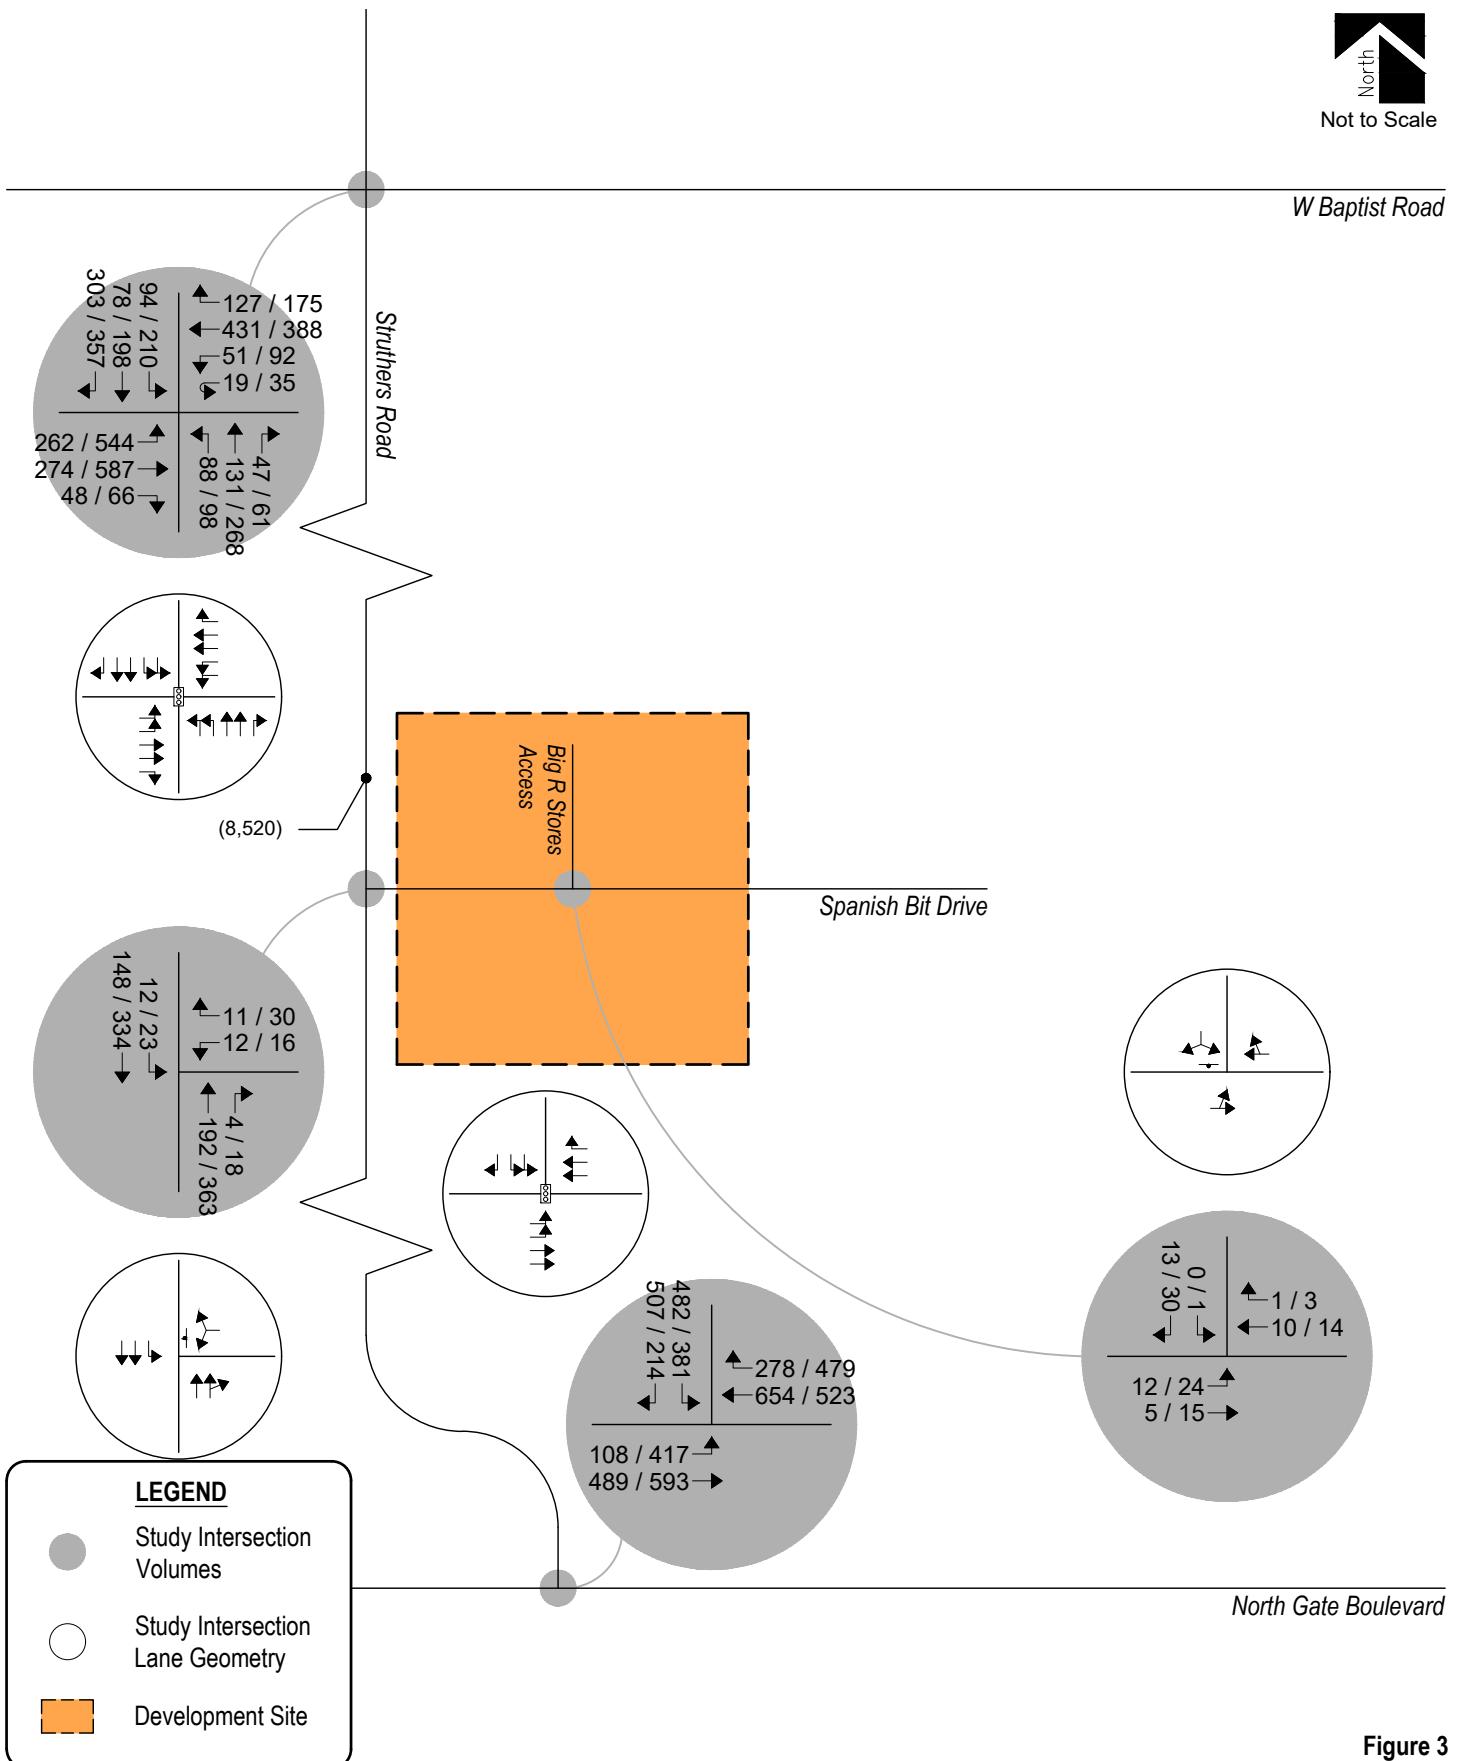


Figure 3
EXISTING TRAFFIC
 Volumes & Intersection Geometry
 AM / PM Peak Hour
 (ADT) : Average Daily Traffic



CATHEDRAL ROCK COMMONS

Traffic Impact Study

SM ROCHA, LLC

Traffic and Transportation Consultants

The Signalized and Unsignalized Intersection Analysis techniques, as published in the Highway Capacity Manual (HCM) by the Transportation Research Board and as incorporated into the SYNCHRO computer program, were used to analyze the study intersections for existing traffic conditions. These nationally accepted techniques allow for the determination of intersection level of service (LOS) based on the congestion and delay of each traffic movement.

Level of service is a method of measurement used by transportation professionals to quantify a driver's perception of travel conditions that include travel time, number of stops, and total amount of stopped delay experienced on a roadway network. The HCM categorizes level of service into a range from "A" which indicates little, if any, vehicle delay, to "F" which indicates a level of operation considered unacceptable to most drivers. These levels of service grades with brief descriptions of the operating condition, for unsignalized and signalized intersections, are included for reference in Appendix C and have been used throughout this study.

The level of service analyses results for existing conditions are summarized in Table 1.

Intersection capacity worksheets developed for this study are provided in Appendix D.

Table 1 – Intersection Capacity Analysis Summary – Existing Traffic

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
W Baptist Road / Struthers Road (Signalized)	C (23.8)	C (31.5)
North Gate Boulevard / Struthers Road (Signalized)	B (16.0)	B (12.1)
Spanish Bit Drive / Struthers Road (Stop-Controlled) Westbound Left and Right Southbound Left	A A	B A
Spanish Bit Drive / Big R Stores Access (Stop-Controlled) Eastbound Left and Through Southbound Left and Right	A A	A A

Key: Signalized Intersection: Level of Service (Control Delay in sec/veh)

Stop-Controlled Intersection: Level of Service

Existing Traffic Analysis Results

Under existing conditions, operational analysis shows that the signalized intersections of Struthers Road with W Baptist Road and North Gate Boulevard have overall operations at or better than LOS C during both the morning and afternoon peak traffic hours.

The stop-controlled intersections of Spanish Bit Drive with Struthers Road and the Big R Stores access drive have turning movement operations at LOS A during the morning peak traffic hour and LOS B or better during the afternoon peak traffic hour.

III. Future Traffic Conditions Without Proposed Development

Background traffic is the traffic projected to be on area roadways without consideration of the proposed development. Background traffic includes traffic generated by development of vacant parcels in the area.

To account for projected increases in background traffic for Years 2023 and 2040, a compounded annual growth rate was determined using population growth estimates provided by the Pikes Peak Area Council of Governments' (PPACG) 2045 Long Range Transportation Plan⁴, which anticipates a 20-year growth rate between one and two percent. Therefore, in order to provide for a conservative analysis, a growth rate of two percent was applied to existing traffic volumes. This annual growth rate is also consistent with assumptions used within traffic studies prepared for adjacent future developments, and is considered consistent with regional growth projections and the level of in-fill development expected within the area.

To account for projected traffic from adjacent developments not yet built, trip generations from the following traffic studies, provided by the County's Electronic Development Application Review Program (EDARP), were added to background traffic volumes:

- Struthers Ranch Subdivision Filing No. 5⁵
- Falcon Commerce Center⁶
- Monument Ridge Lots 7 & 8⁷

It is important to note that trip generations from the future Monument Ridge Apartments development and other vacant lots within Monument Ridge, as shown within the Monument Ridge Lots 7 & 8 Transportation Memorandum, were also included in background traffic volumes.

Pursuant to the non-committed area roadway improvements discussed in Section I, Year 2023 and Year 2040 background traffic conditions assume no roadway improvements to accommodate regional transportation demands. Year 2023 and Year 2040 also assumes existing signal timing parameters for W Baptist Road and Struthers Road with optimized intersection splits due to the isolated, uncoordinated condition of the signal control.

Projected background traffic volumes and intersection geometry for Years 2023 and 2040 are shown on Figure 4 and Figure 5, respectively.

⁴ Moving Forward 2045: Pikes Peak Area Regional Transportation Plan, PPACG, January 2020.

⁵ Struthers Ranch Subdivision Filing No. 5: Traffic Impact Study, LSC Transportation Consultants, Inc., May 14, 2021.

⁶ Falcon Commerce Center: Traffic Impact Study, SM ROCHA, LLC, August 2020.

⁷ Monument Ridge Lots 7 & 8: Transportation Memorandum, LSC Transportation Consultants, Inc., December 20, 2019.

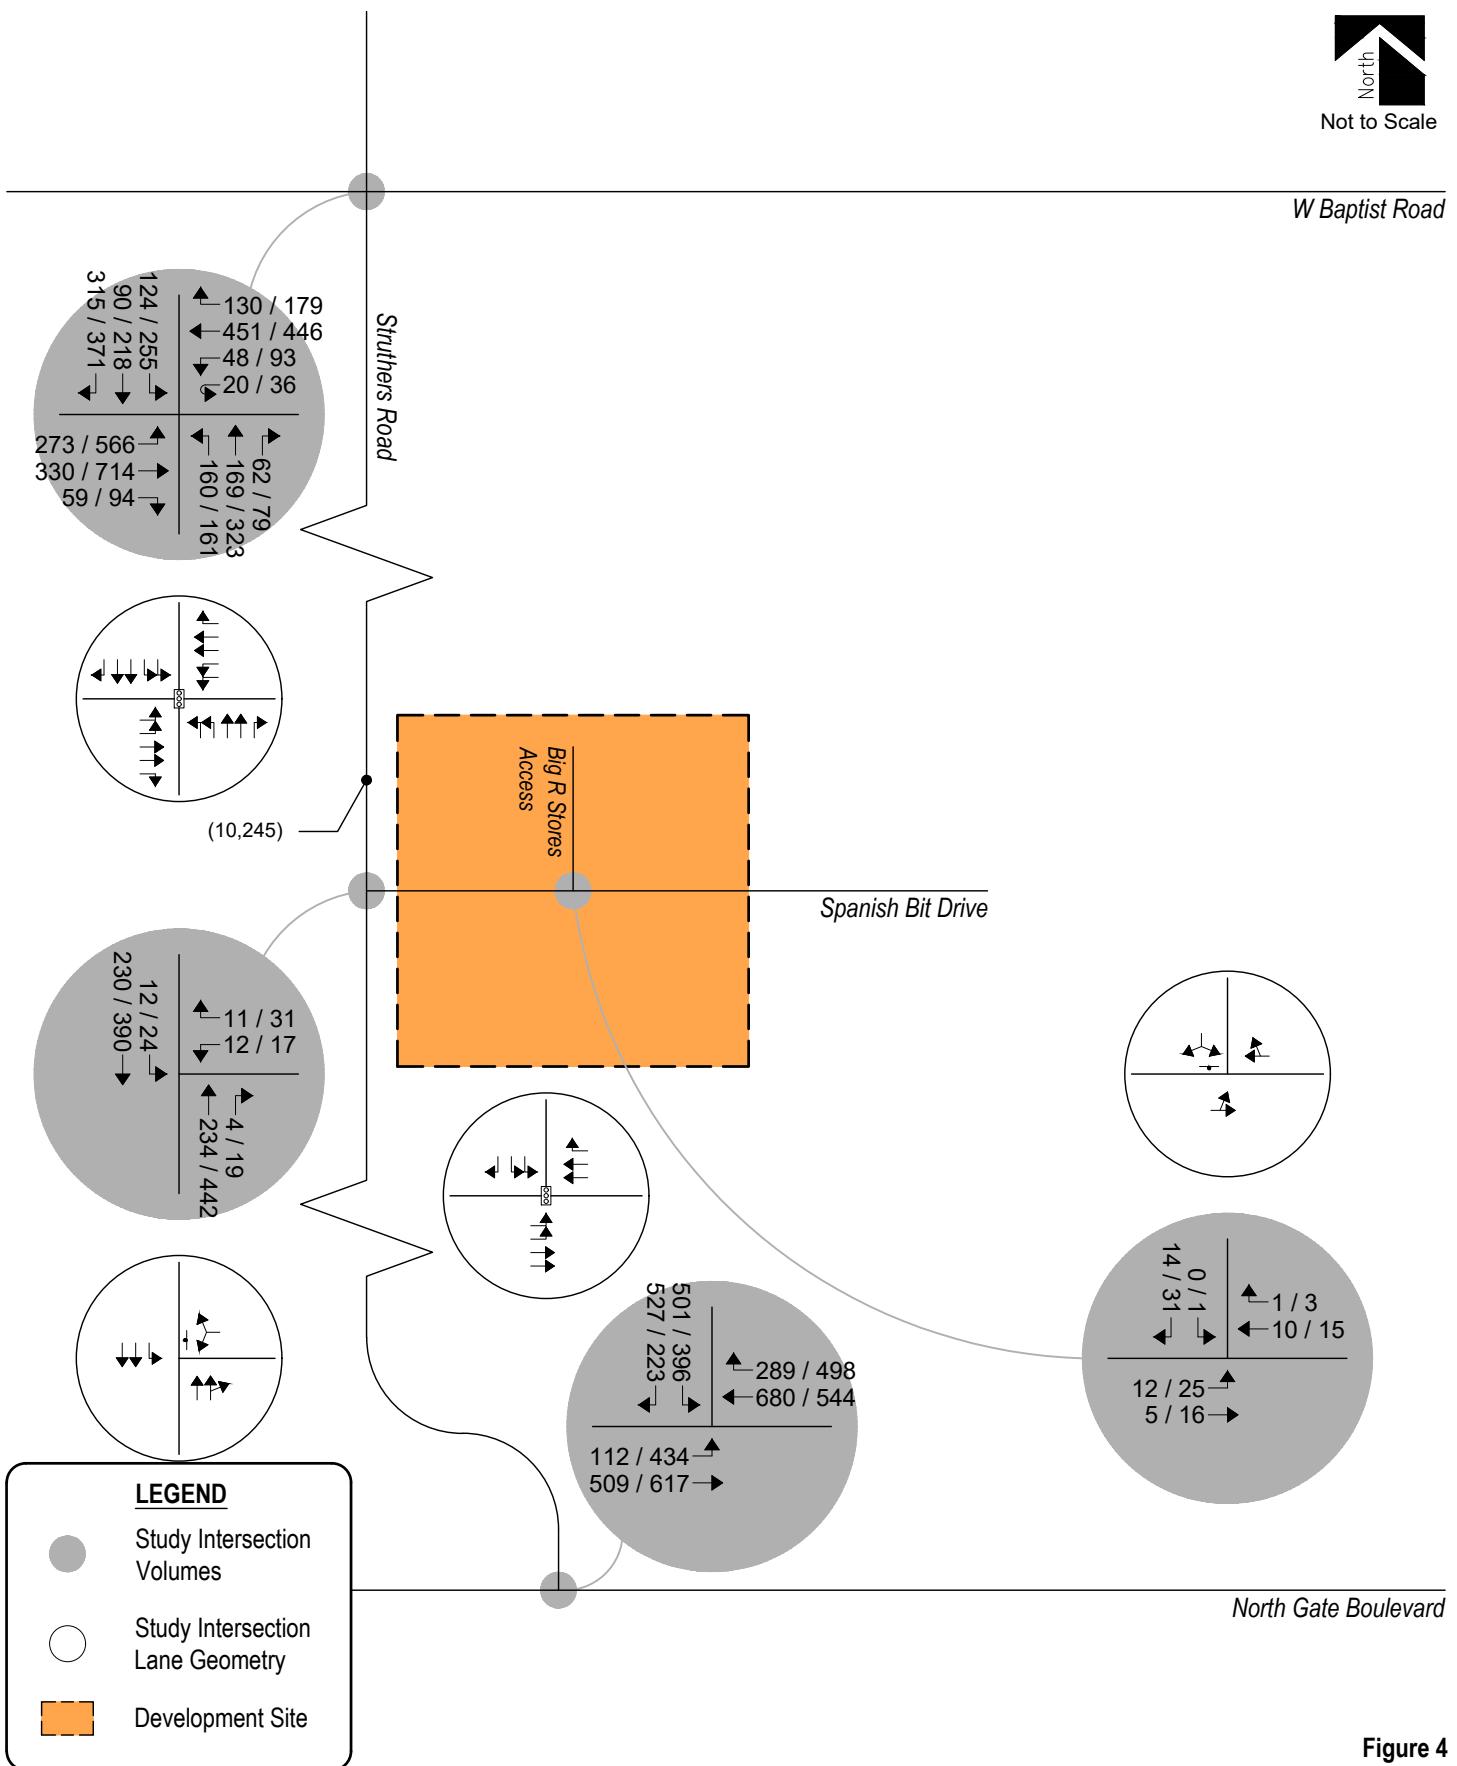


Figure 4
BACKGROUND TRAFFIC - YEAR 2023
 Volumes & Intersection Geometry
 AM / PM Peak Hour
 (ADT) : Average Daily Traffic

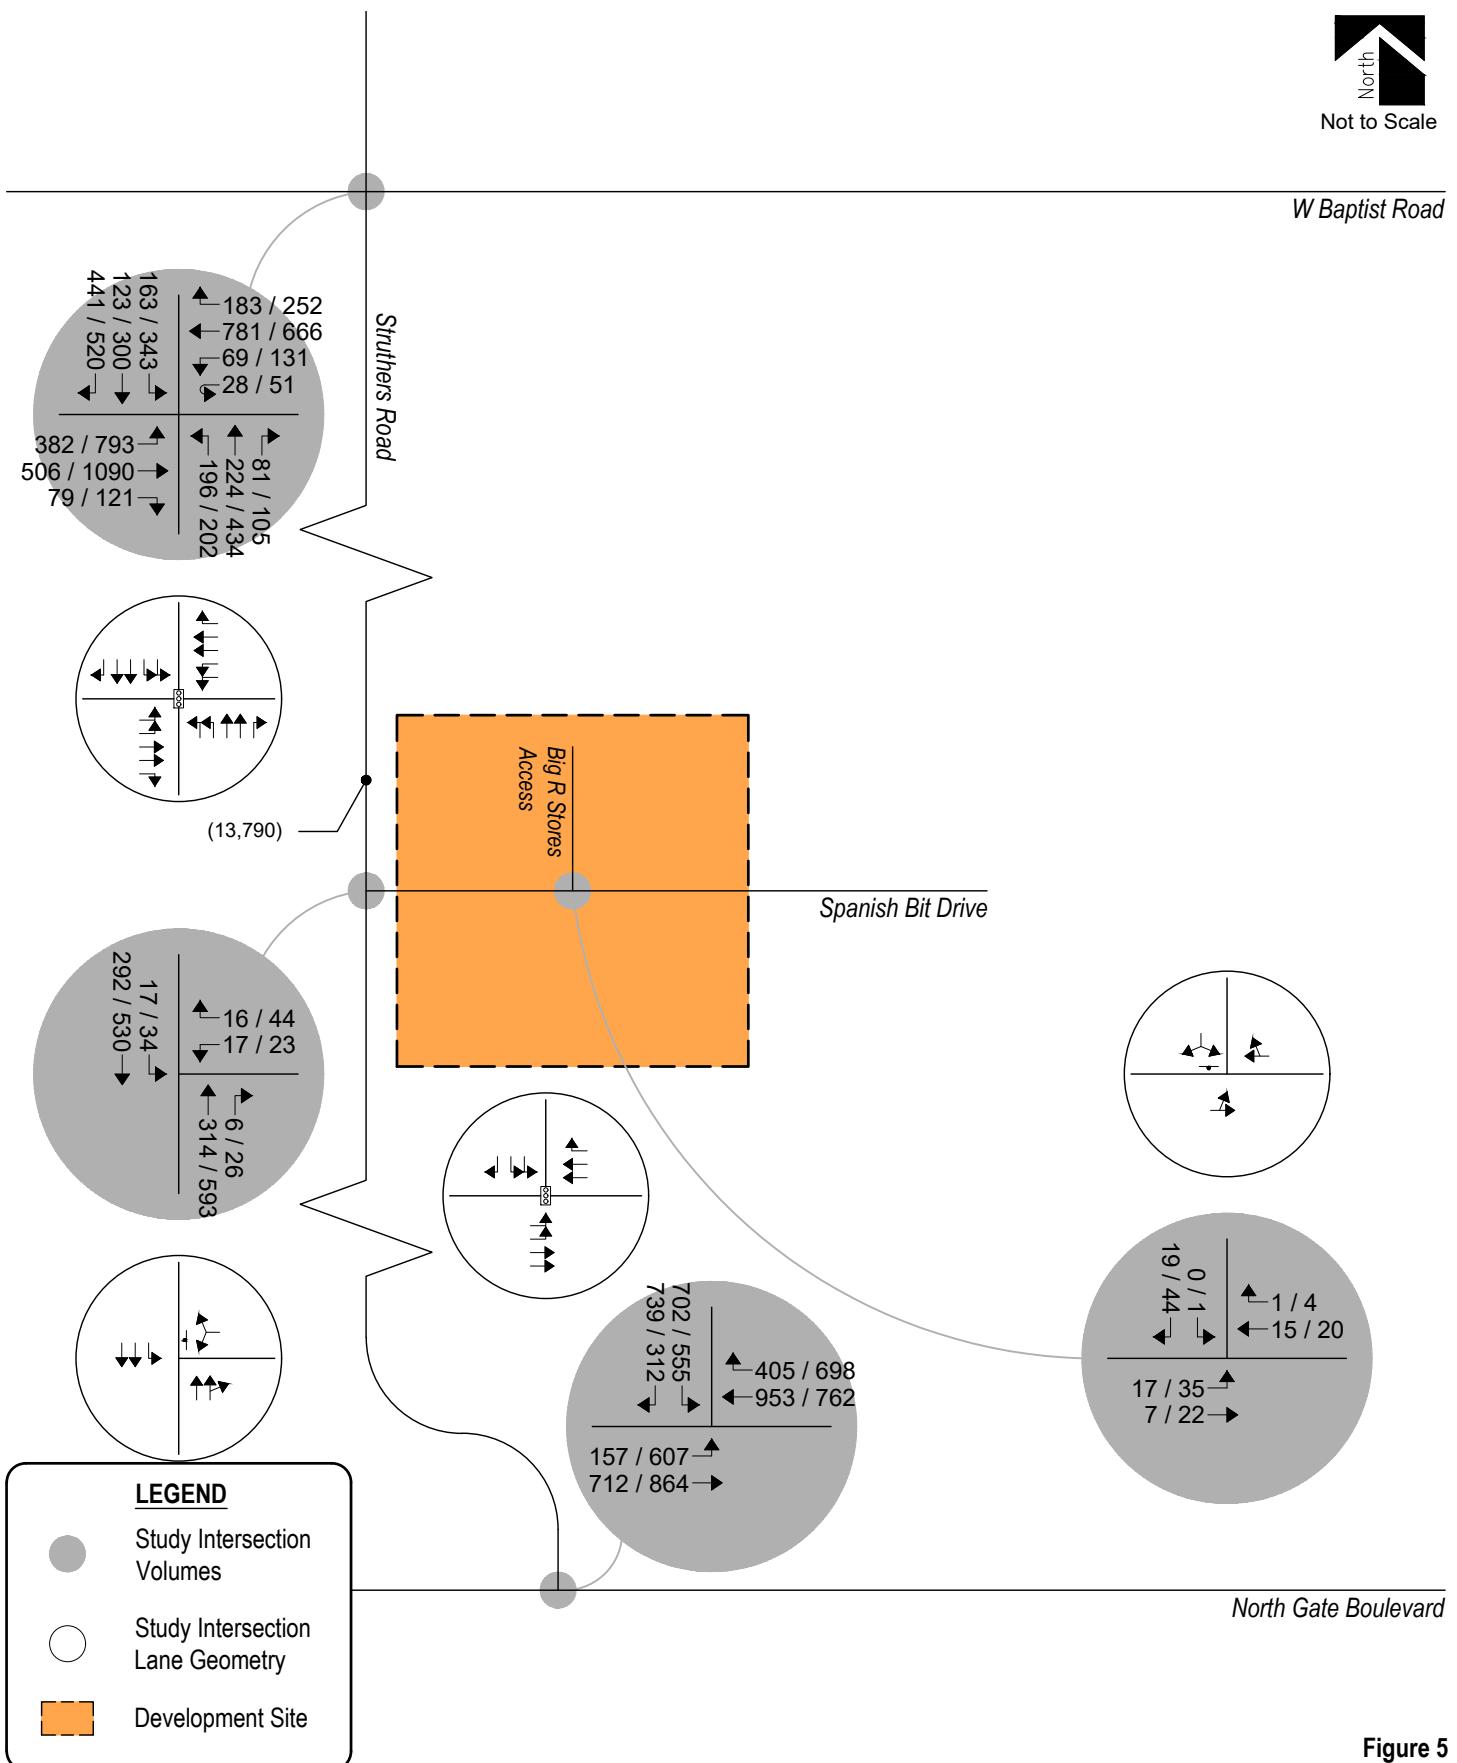


Figure 5
BACKGROUND TRAFFIC - YEAR 2040
 Volumes & Intersection Geometry
 AM / PM Peak Hour
 (ADT) : Average Daily Traffic



As with existing traffic conditions, the operations of study intersections were analyzed under background conditions, without the proposed development, using the SYNCHRO computer program.

Background traffic level of service analysis results for Year 2023 are listed in Table 2. Year 2040 operational results are summarized in Table 3.

Definitions of levels of service are given in Appendix C. Intersection capacity worksheets are provided in Appendix D.

Table 2 – Intersection Capacity Analysis Summary – Background Traffic – Year 2023

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
W Baptist Road / Struthers Road (Signalized)	C (25.9)	C (34.3)
North Gate Boulevard / Struthers Road (Signalized)	B (16.7)	B (12.2)
Spanish Bit Drive / Struthers Road (Stop-Controlled) Westbound Left and Right Southbound Left	B A	B A
Spanish Bit Drive / Big R Stores Access (Stop-Controlled) Eastbound Left and Through Southbound Left and Right	A A	A A

Key: Signalized Intersection: Level of Service (Control Delay in sec/veh)
Stop-Controlled Intersection: Level of Service

Background Traffic Analysis Results – Year 2023

Year 2023 background traffic analysis indicates that the signalized intersection of W Baptist Road with Struthers Road experiences overall operations at LOS C during both the morning and afternoon peak traffic hours.

The signalized intersection of North Gate Boulevard and with Struthers Road shows overall operations at LOS B during either peak traffic hour.

The stop-controlled intersection of Spanish Bit Drive with Struthers Road has turn movement operations at or better than LOS B during both the morning and afternoon peak traffic hours.

The stop-controlled intersection of Spanish Bit Drive with the Big R Stores access drive has turn movement operations at LOS A during both the morning and afternoon peak traffic hours.

Table 3 – Intersection Capacity Analysis Summary – Background Traffic – Year 2040

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
W Baptist Road / Struthers Road (Signalized)	D (37.4)	D (44.3)
North Gate Boulevard / Struthers Road (Signalized)	D (39.8)	B (17.6)
Spanish Bit Drive / Struthers Road (Stop-Controlled) Westbound Left and Right Southbound Left	B A	C A
Spanish Bit Drive / Big R Stores Access (Stop-Controlled) Eastbound Left and Through Southbound Left and Right	A A	A A

Key: Signalized Intersection: Level of Service (Control Delay in sec/veh)
 Stop-Controlled Intersection: Level of Service

Background Traffic Analysis Results – Year 2040

By Year 2040 and without the proposed development, the signalized intersection of W Baptist Road with Struthers Road anticipates overall operations at LOS D during both the morning and afternoon peak traffic hours.

The signalized intersection of North Gate Boulevard with Struthers Road expects overall intersection operations at LOS D during the morning peak traffic hour and LOS B during the afternoon peak traffic hour.

The stop-controlled intersection of Spanish Bit Drive with Struthers Road experiences turn movement operations at or better than LOS B during the morning peak traffic hour and LOS C or better during the afternoon peak traffic hour.

The stop-controlled intersection of Spanish Bit Drive with the Big R Stores access drive projects turn movement operations at LOS A during both the morning and afternoon peak traffic hours.

IV. Proposed Project Traffic

Trip Generation

Standard traffic generation characteristics compiled by the Institute of Transportation Engineers (ITE) in their report entitled Trip Generation Manual, 10th Edition, were applied to the proposed land use in order to estimate average daily traffic (ADT), AM Peak Hour, and PM Peak Hour vehicle trips. A vehicle trip is defined as a one-way vehicle movement from a point of origin to a point of destination.

The ITE land use codes 565 (Day Care Center) and 820 (Shopping Center) were used for estimating trip generation of commercial and retail portions of development because of their conservative trip generation rates and best fit to the proposed land use descriptions. For the proposed multifamily residential portion of development, it is understood that the multifamily residential buildings will be approximately three to four stories. As such ITE land use code 221 (Multifamily Housing (Mid-Rise)) was used for estimating trip generation due to its best fit to the proposed land use description.

It is understood that the proposed retail development north of Spanish Bit Drive is conceptual and no specific land uses have been defined. Therefore, as actual land uses, densities, or site plans within the retail portion of Cathedral Rock Commons become defined over time, it is expected that traffic generation characteristics considered within this study may need to be updated by more specific traffic analyses or studies to help assess if transportation improvements are needed to mitigate potential traffic impacts.

Trip generation rates used in this study are presented in Table 4.

Table 4 – Trip Generation Rates

ITE CODE	LAND USE	UNIT	TRIP GENERATION RATES						
			24 HOUR	AM PEAK HOUR			PM PEAK HOUR		
				ENTER	EXIT	TOTAL	ENTER	EXIT	TOTAL
221	Multifamily Housing (Mid-Rise)	DU	5.44	0.09	0.27	0.36	0.27	0.17	0.44
565	Day Care Center	KSF	47.62	5.83	5.17	11.00	5.23	5.89	11.12
820	Shopping Center	KSF	37.75	0.58	0.36	0.94	1.83	1.98	3.81

Key : DU = Dwelling Units. KSF = Thousand Square Feet Gross Floor Area.

Note: All data and calculations above are subject to being rounded to nearest value.

Table 5 illustrates projected ADT, AM Peak Hour, and PM Peak Hour traffic volumes likely generated by the proposed development upon build-out.

Table 5 – Trip Generation Summary

ITE CODE	LAND USE	SIZE	TOTAL TRIPS GENERATED								
			24 HOUR	AM PEAK HOUR			PM PEAK HOUR				
				ENTER	EXIT	TOTAL	ENTER	EXIT	TOTAL		
221	Multifamily Housing (Mid-Rise)	120 DU	653	11	32	43	32	21	53		
565	Day Care Center	10.0 KSF	476	58	52	110	52	59	111		
820	Shopping Center	29.0 KSF	1,095	17	10	27	53	57	110		
<i>Total:</i>			2,224	86	94	180	138	137	274		

Note: All data and calculations above are subject to being rounded to nearest value.

Upon build-out, Table 5 illustrates that the proposed development has the potential to generate approximately 2,224 daily trips with 180 of those occurring during the morning peak hour and 274 during the afternoon peak hour.

Adjustments to Trip Generation Rates

It is considered likely that a mixed-use development of this type will attract trips from within area land uses. Utilizing research obtained by the National Cooperative Highway Research Program (NCHRP), ITE created an estimation tool⁸ for determining internal capture for mixed-use developments. Using NCHRP Report 684 methodology, it is determined that the proposed land uses have various internal capture percentages ranging from 0 to 35 percent. Applying vehicle occupancy estimates from ITE's Trip Generation Handbook, 3rd Edition, it is determined that overall averages of approximately 0% of total AM peak hour trips and approximately 15% of total PM peak hour trips will be captured internally.

It is important to note that ITE's institutional land uses, such as Day Care Center, are not subject to internal capture computations within the estimation tool. This is due to the nature of such businesses which generally operate as destinations for a specific demographic serving a wide area. Considering the relatively low traffic volumes generated by the residential and retail land uses, it is likely that only a small portion of trips to the Day Care Center, if any, will originate within the development area. As such, no internal capture during the morning peak traffic hour is to be expected.

ITE's internal capture spreadsheets are provided for reference in Appendix B.

Table 6 illustrates projected ADT, AM Peak Hour, and PM Peak Hour traffic volumes likely generated by the proposed development upon build-out with reductions applied due to internal capture.

⁸ [NCHRP Report 684: Enhancing Internal Trip Capture Estimation for Mixed-Use Developments](#), National Cooperative Highway Research Program, October 2010.

Table 6 – Trip Generation Summary with Reductions

ITE CODE	LAND USE	SIZE	TOTAL TRIPS GENERATED							
			24 HOUR	AM PEAK HOUR			PM PEAK HOUR			TOTAL
				ENTER	EXIT	TOTAL	ENTER	EXIT		
221	Multifamily Housing (Mid-Rise)	120 DU	653	11	32	43	32	21	53	
		<i>Internal Capture:</i>	14%	0%	0%	0%	35%	20%	28%	
			563	11	32	43	21	16	38	
565	Day Care Center	10.0 KSF	476	58	52	110	52	59	111	
		<i>Internal Capture:</i>	0%	0%	0%	0%	0%	0%	0%	
			476	58	52	110	52	59	111	
820	Shopping Center	29.0 KSF	1,095	17	10	27	53	57	110	
		<i>Internal Capture:</i>	9%	0%	0%	0%	9%	25%	17%	
			1,002	17	10	27	48	43	92	
		<i>Total:</i>	2,041	86	94	180	121	119	241	

Note: All data and calculations above are subject to being rounded to nearest value.

Upon build-out and with consideration for internal capture trip reductions, Table 6 illustrates that the proposed development has the potential to generate approximately 2,041 daily trips with 180 of those occurring during the morning peak hour and 241 during the afternoon peak hour.

Trip Distribution

The overall directional distribution of site-generated traffic was coordinated with County Staff and determined based on the location of development site within the County, proposed and existing area land uses, allowed turning movements, available roadway network, and in reference to distribution patterns of existing traffic count data.

Overall trip distribution patterns for the development are shown on Figure 6.

Trip Assignment

Traffic assignment is how generated and distributed vehicle trips are expected to be loaded onto the available roadway network.

Due to the design of the development area as shown in Figure 2, positioning retail north of Spanish Bit Drive and residential south of Spanish Bit Drive, site-generated trips lost due to internal capture are assumed to represent the through volumes traveling north-south across Spanish Bit Drive. Inclusion of these traffic volumes is understood to provide for a conservative analysis.

Applying trip distribution patterns to site-generated traffic provides the overall site-generated trip assignments shown on Figure 6.



Not to Scale

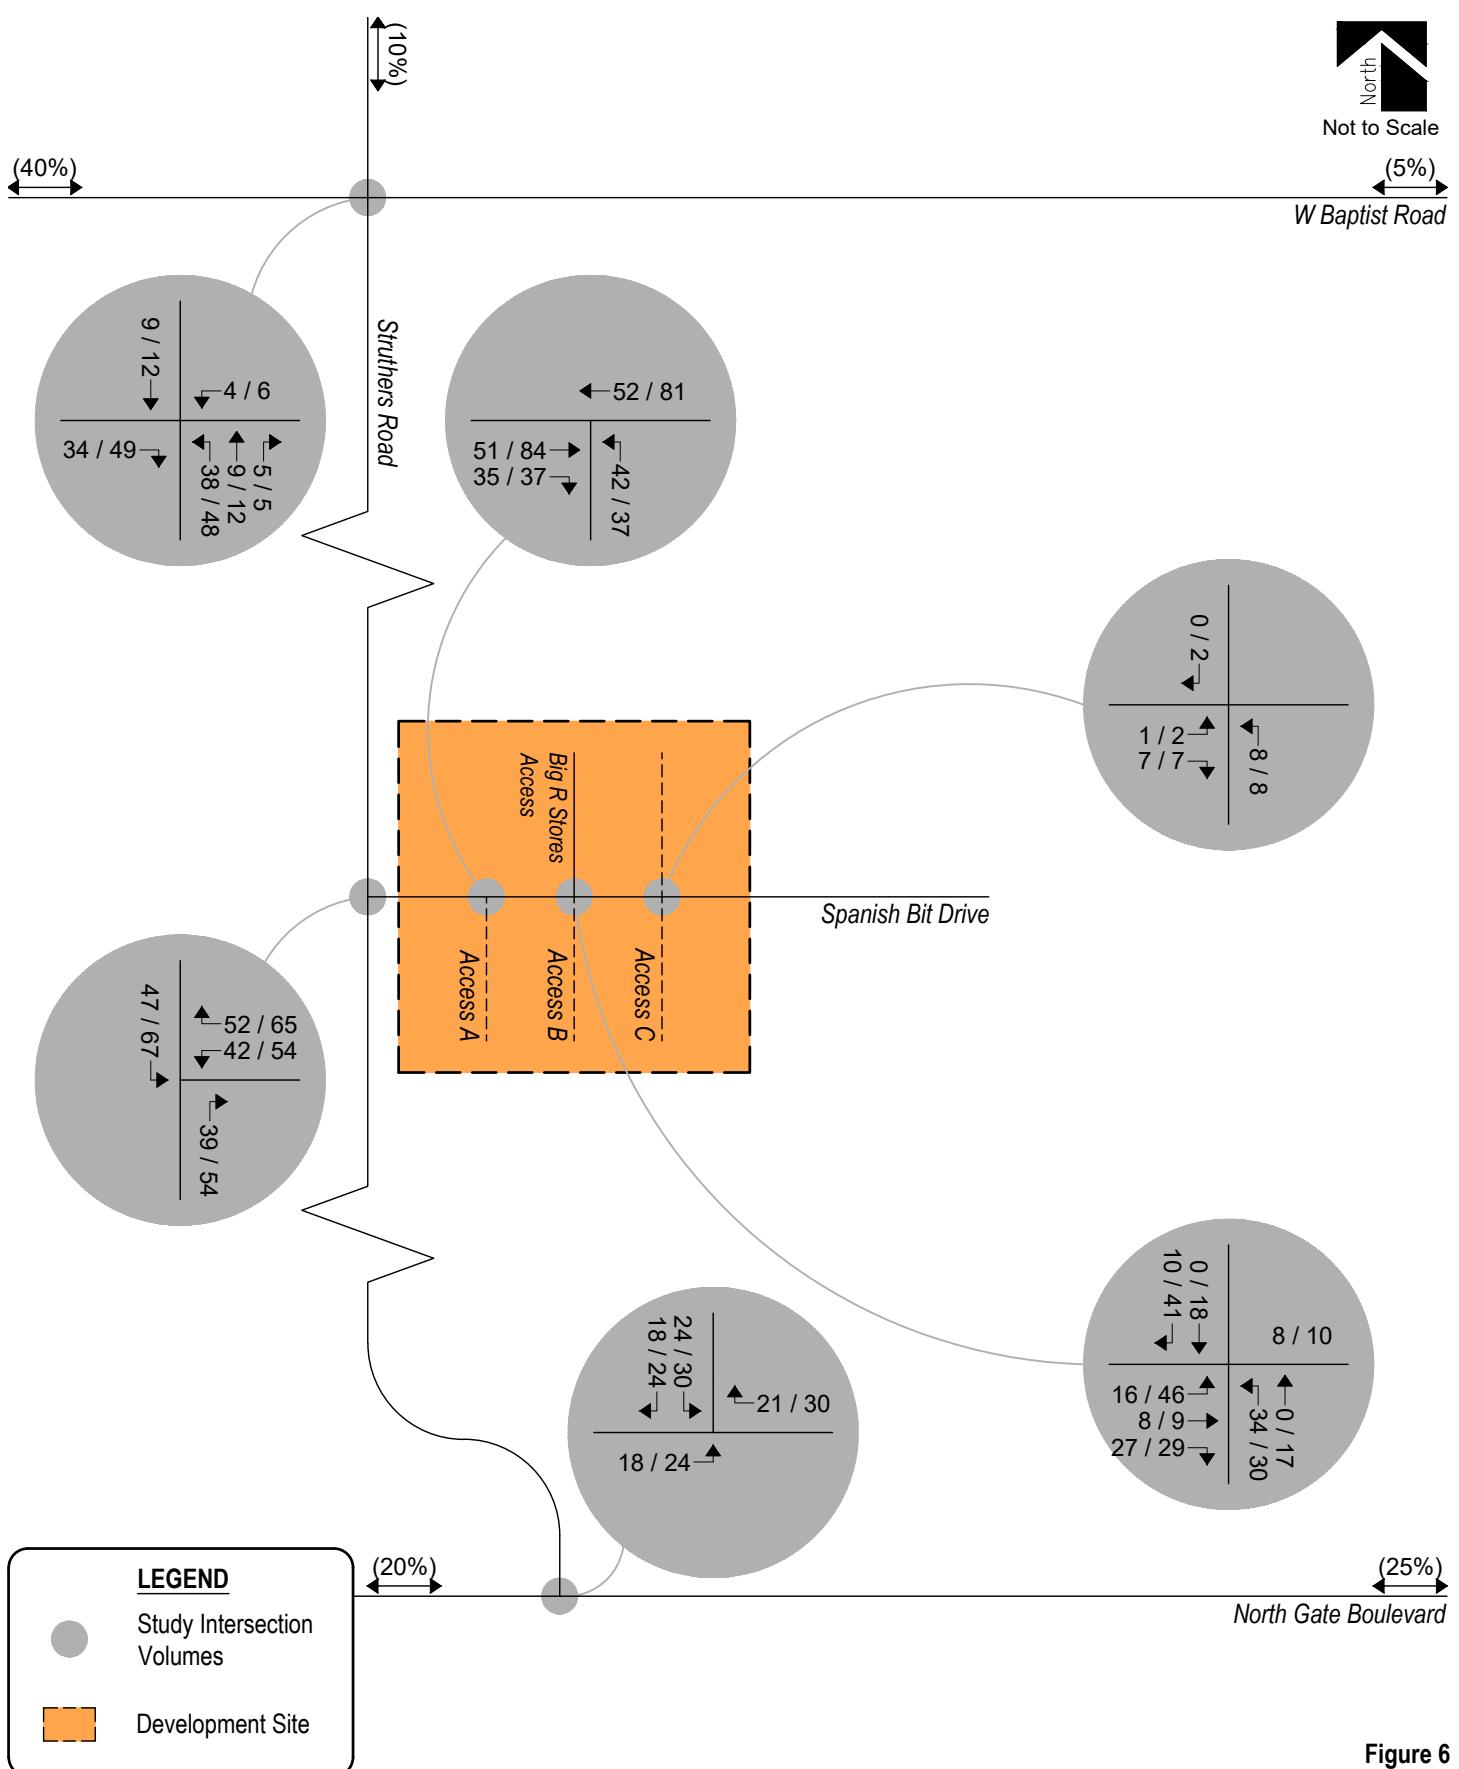


Figure 6
SITE DEVELOPMENT DISTRIBUTION (%) : Overall
SITE-GENERATED AM / PM Peak Hour



CATHEDRAL ROCK COMMONS

Traffic Impact Study

SM ROCHA, LLC

Traffic and Transportation Consultants

April 2022

Page 17

V. Future Traffic Conditions With Proposed Developments

Site-generated traffic was added to background traffic projections for Years 2023 and 2040 to develop total traffic projections. For analysis purposes, it was assumed that development construction would be completed by end of Year 2023.

Pursuant to area roadway improvement discussions provided in Section III, Year 2023 and Year 2040 total traffic conditions assume no roadway improvements to accommodate regional transportation demands. Roadway improvements associated with site development are expected to be limited to site access and frontage as required by the governing agency.

Projected Year 2023 total traffic volumes and intersection geometry are shown in Figure 7.

Figure 8 shows projected total traffic volumes and intersection geometry for Year 2040.

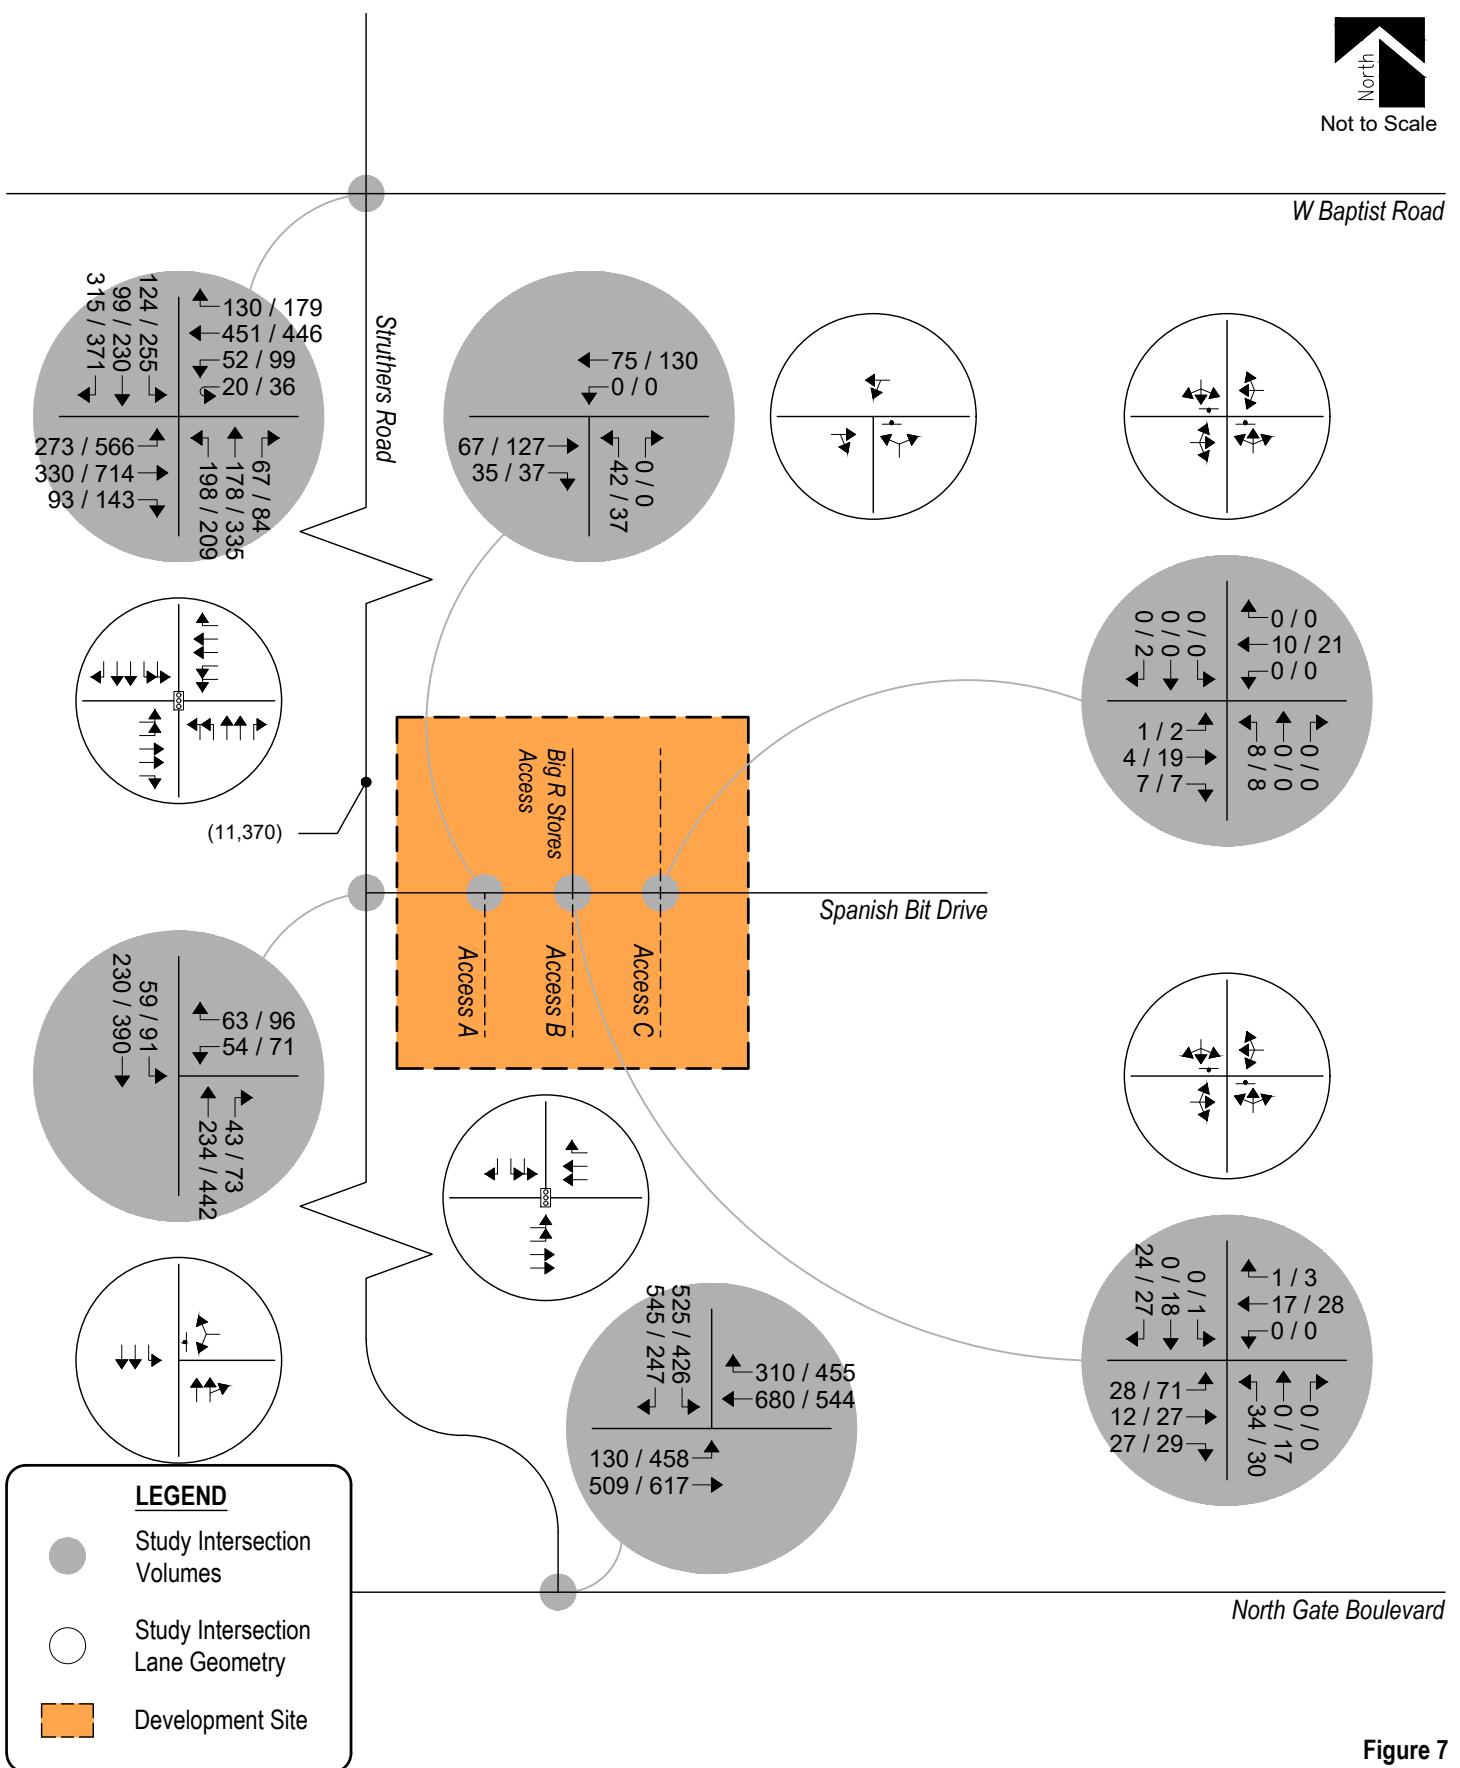


Figure 7
TOTAL TRAFFIC - YEAR 2023
 Volumes & Intersection Geometry
 AM / PM Peak Hour
 (ADT) : Average Daily Traffic

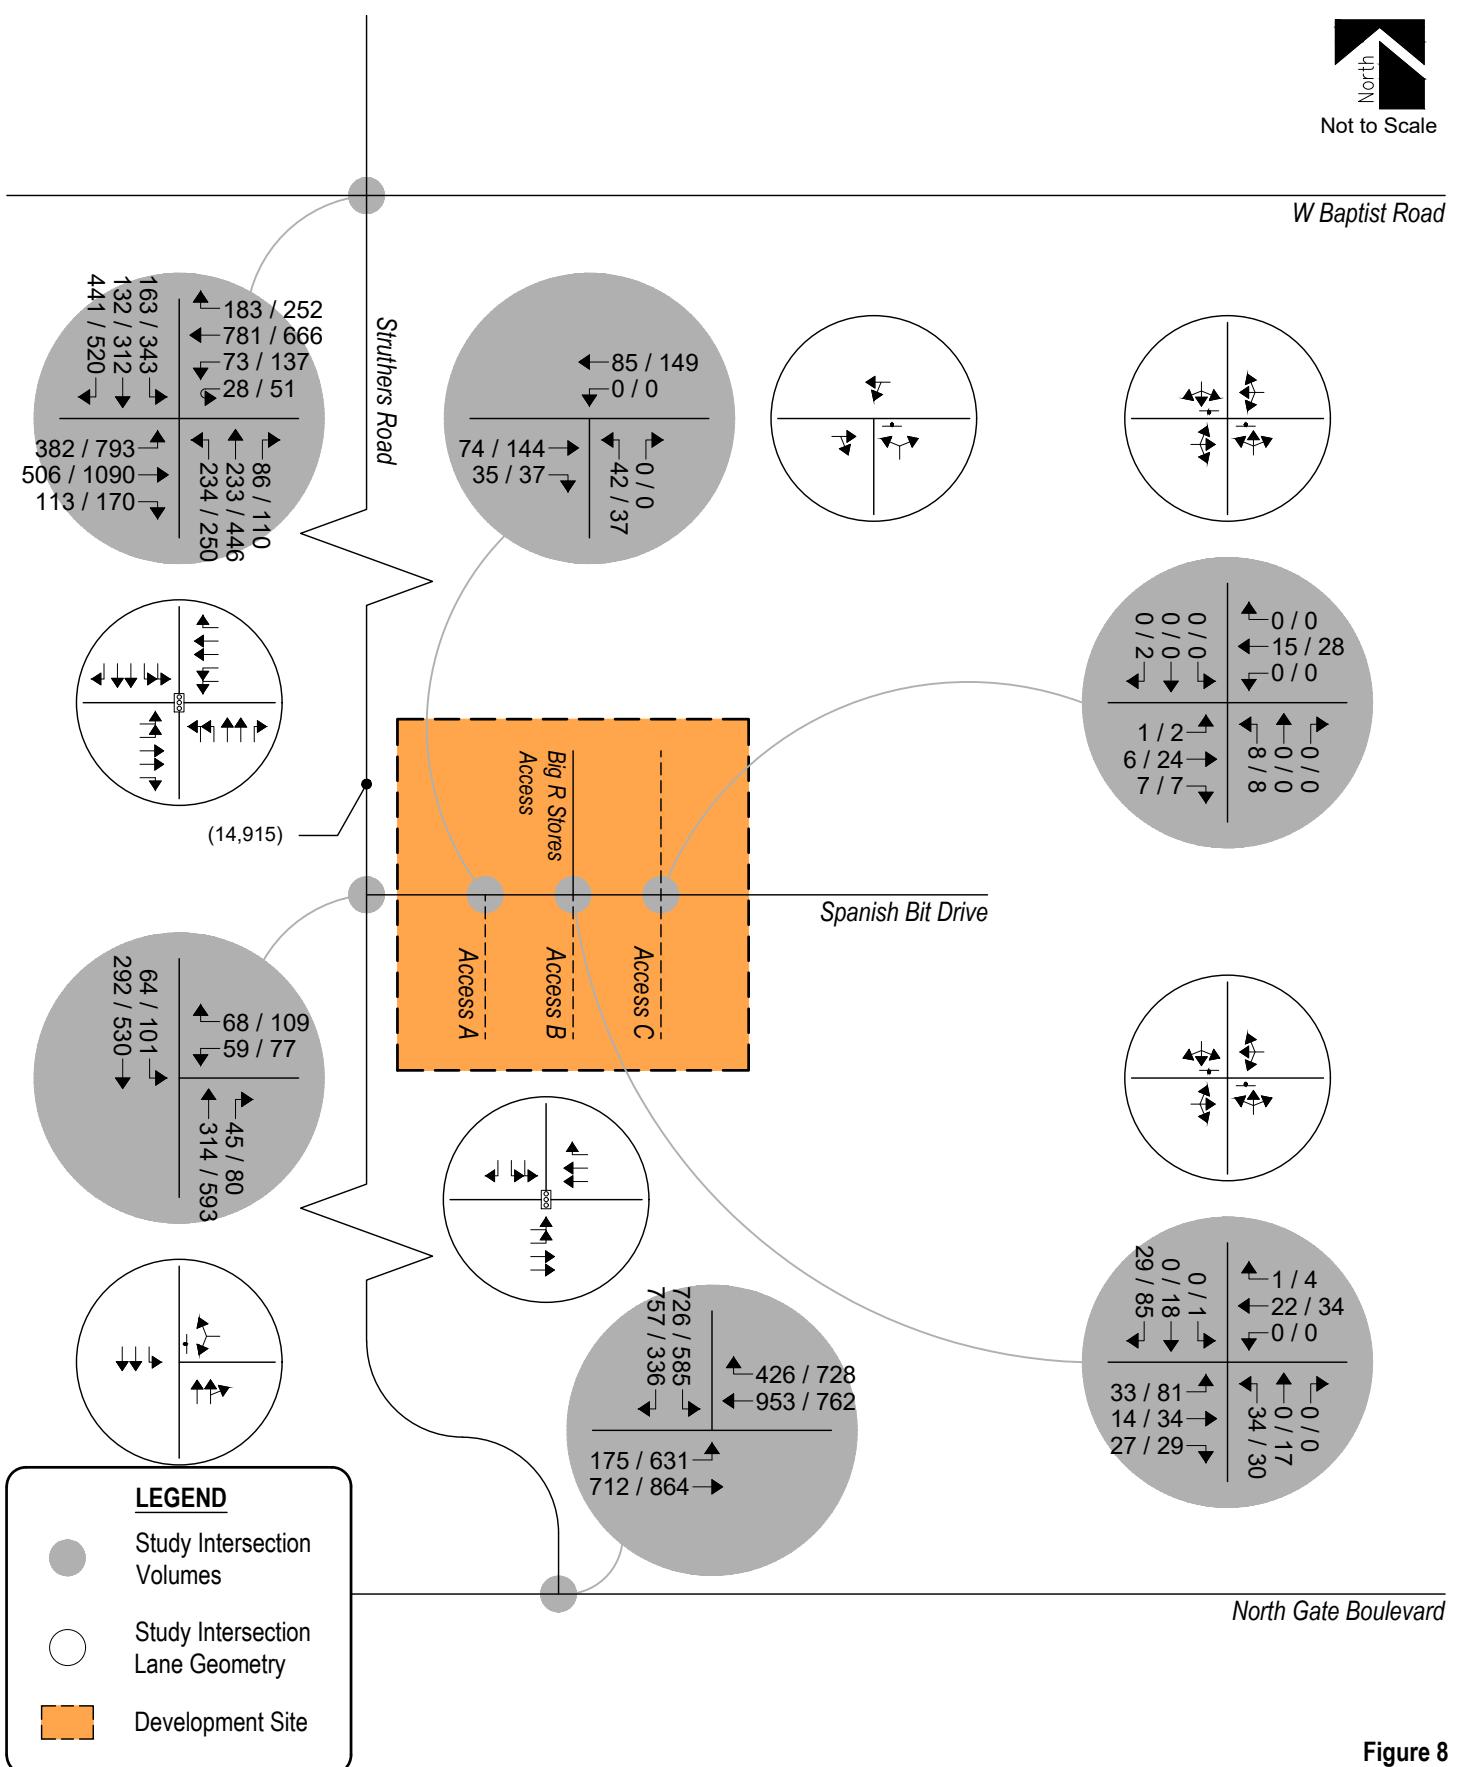


Figure 8
TOTAL TRAFFIC - YEAR 2040
 Volumes & Intersection Geometry
 AM / PM Peak Hour
 (ADT) : Average Daily Traffic



CATHEDRAL ROCK COMMONS

Traffic Impact Study

SM ROCHA, LLC

Traffic and Transportation Consultants

VI. Project Impacts

The analyses and procedures described in this study were performed in accordance with the Highway Capacity Manual (HCM) and are based upon the worst-case conditions that occur during a typical weekday upon build-out of site development and analyzed land uses. Therefore, study intersections are likely to operate with traffic conditions better than those described within this study, which represent the peak hours of weekday operations only.

Peak Hour Intersection Levels of Service

As with background traffic, the operations of the study intersections were analyzed under projected total traffic conditions using the SYNCHRO computer program. Total traffic level of service analysis results for Years 2023 and 2040 are summarized in Table 7 and Table 8, respectively.

Definitions of levels of service are given in Appendix C. Intersection capacity worksheets are provided in Appendix D.

Table 7 – Intersection Capacity Analysis Summary – Total Traffic – Year 2023

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
W Baptist Road / Struthers Road (Signalized)	C (26.3)	C (34.8)
North Gate Boulevard / Struthers Road (Signalized)	B (16.9)	B (12.5)
Spanish Bit Drive / Struthers Road (Stop-Controlled) Westbound Left and Right Southbound Left	B A	C A
Spanish Bit Drive / Access A (Stop-Controlled) Westbound Left and Through Northbound Left and Right	A A	B A
Spanish Bit Drive / Access B (Stop-Controlled) Eastbound Left, Through and Right Westbound Left, Through and Right Northbound Left, Through and Right Southbound Left, Through and Right	A A A A	A A B A
Spanish Bit Drive / Access C (Stop-Controlled) Eastbound Left, Through and Right Westbound Left, Through and Right Northbound Left, Through and Right Southbound Left, Through and Right	A A A A	A A A A

Key: Signalized Intersection: Level of Service (Control Delay in sec/veh)
Stop-Controlled Intersection: Level of Service

Table 8 – Intersection Capacity Analysis Summary – Total Traffic – Year 2040

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
W Baptist Road / Struthers Road (Signalized)	D (38.1)	D (46.2)
North Gate Boulevard / Struthers Road (Signalized)	D (48.4)	B (18.9)
Spanish Bit Drive / Struthers Road (Stop-Controlled) Westbound Left and Right Southbound Left	B A	E A
Spanish Bit Drive / Access A (Stop-Controlled) Westbound Left and Through Northbound Left and Right	A A	B A
Spanish Bit Drive / Access B (Stop-Controlled) Eastbound Left, Through and Right Westbound Left, Through and Right Northbound Left, Through and Right Southbound Left, Through and Right	A A A A	A A B A
Spanish Bit Drive / Access C (Stop-Controlled) Eastbound Left, Through and Right Westbound Left, Through and Right Northbound Left, Through and Right Southbound Left, Through and Right	A A A A	A A A A

Key: Signalized Intersection: Level of Service (Control Delay in sec/veh)

Stop-Controlled Intersection: Level of Service

Total Traffic Analysis Results Upon Development Build-Out

Table 8 illustrates how, by Year 2040 and upon development build-out, the signalized intersection of W Baptist Road with Struthers Road shows an overall LOS D operation during both the morning and afternoon peak traffic hours. Compared to the background traffic analysis, the traffic generated by the proposed development is not expected to significantly change the operations of the study intersection.

The signalized intersection of North Gate Boulevard with Struthers Road continues to experience overall operations at LOS D during the morning peak traffic hour and LOS B during the afternoon peak traffic hour.

The stop-controlled intersection of Spanish Bit Drive with Struthers Road is projected to have turning movement operations at or better than LOS B during both peak traffic hours. Exceptions would include the westbound turning movement which operates at LOS E during the afternoon peak traffic hour. The LOS E operation is attributed to the through traffic volume along Struthers Road and the stop-controlled nature of the intersection.

The stop-controlled intersection of Spanish Bit Drive with Access B is expected to have turning movement operations at LOS A during the morning peak traffic hour and LOS B or better during the afternoon peak traffic hour.

The stop-controlled intersection of Spanish Bit Drive with Access A is shown to have turning movement operations at LOS A during the morning peak traffic hour and LOS B or better during the afternoon peak traffic hour.

The stop-controlled intersection of Spanish Bit Drive with Access C is anticipated to have turning movement operations at LOS A during both the morning and afternoon peak traffic hours.

It is to be noted that it is not uncommon for unsignalized movements to or from an arterial roadway, in urban areas, to operate with noticeable delays during peak traffic hours. It is, however, likely that turn movements will operate better than the results obtained with this HCM Two-Way Stop-Control (TWSC) level of service analysis would indicate, as the HCM analysis may not accurately account for the effect of vehicle platooning and gaps caused by upstream signals. Upstream signal controls along Struthers Road will tend to create additional gaps in the traffic stream for turning movements at Spanish Bit Drive and will most likely provide mitigation to the LOS E operation projected during the AM peak traffic hour.

Potential Public Improvements

The existing Development Agreement for the adjacent Big R Stores defines off-site improvements and cost participation for potential Struthers Road and Spanish Bit Drive improvements. These off-site public improvements include the construction for or modification of auxiliary lanes along Struthers Road (referred to as Struthers Off-Site Improvements) and the paving of Spanish Bit Drive from the Big R Stores east property line to proposed development's east property line.

In conjunction with improvements discussed within the County's PCD – Engineering Meeting Notes dated November 17, 2020, Table 9 illustrates potential public improvements associated with the proposed Cathedral Rock Commons development.

Table 9 – Potential Public Improvements

PUBLIC IMPROVEMENT	TYPE	TIMING
Construct northbound right turn lane on Struthers Road at Spanish Bit Drive	Auxiliary Lane	When Warranted
Lengthen southbound left turn lane on Struthers Road at Spanish Bit Drive	Auxiliary Lane	When 95th Percentile Queuing Exceeds Existing Lane Length
Pave Spanish Bit Drive east to eastern edge of property line	Roadway Segment	With Development North of Spanish Bit Drive

As defined within the existing Development Agreement, these off-site public improvements should be paid for through a cost sharing agreement or participate in a cost recovery with other adjacent developments or owners benefitting from the Struthers Off-site Improvements.

Queue Length Analysis

Queue lengths for existing and proposed study intersections were analyzed using Year 2040 total traffic conditions. The analysis yields estimate of 95th percentile queue lengths, which have only a five percent probability of being exceeded during the analysis time period. Queue lengths were modeled and are included with the SYNCHRO worksheets in Appendix D.

No significant queues at the existing intersections and proposed site accesses were indicated. The greatest on-site queue length occurs during the afternoon peak hour at the intersection of Struthers Road with Spanish Bit Drive. The queue length is approximately five to six vehicles for the westbound left and right turn movement.

Auxiliary Lane Analysis

Auxiliary lanes for site development accesses were based

Unresolved. Please explain how this meets ECM criteria. What are the allowed amounts and how does this comply with the criteria? Per ECM appendix B.8, ECM criteria should be analyzed and determine whether it will be met.

Considering development build-out, an evaluation of auxiliary lane requirements, pursuant to Section 2.3.7 of the County's ECM, reveals that a right turn deceleration lane along Struthers Road at Spanish Bit Drive may be required since the northbound right turn ingress volume is shown to exceed the 50 vehicles per hour threshold.

An evaluation of auxiliary lane requirements for the existing southbound left turn lane along Struthers Road indicates that the exclusive turn lane requirements meet County minimum requirements and that no changes are recommended.

Unresolved. Please identify what the required lengths for each section are per the ECM, and include what is out in the field. How does the existing configuration meet the criteria? Per ECM appendix B.8, ECM criteria should be analyzed and determine whether it will be met.

in the immediate area.

- List ECM criteria for stacking, storage, and taper for every affected auxiliary lane and access and state whether this access can be met. If it cannot be met, state the required modifications so that it can be met.

VII. Conclusion

This traffic impact study addressed the capacity, geometric, and control requirements associated with the development entitled Cathedral Rock Commons. This proposed mixed-use development consists of multifamily residential, institutional, and retail land uses. The development is located near the east corner of Struthers Road and Spanish Bit Drive in El Paso County, Colorado.

The study area examined in this analysis was coordinated with County Staff and encompassed Struthers Road north to W Baptist Road and south to North Gate Boulevard, and Spanish Bit Drive from Struthers Road east to proposed site accesses.

Analysis was conducted for critical AM Peak Hour and PM Peak Hour traffic operations for existing traffic conditions, Year 2023 and Year 2040 background traffic conditions, and Year 2023 and Year 2040 total traffic conditions.

Analysis of existing traffic conditions indicates that the signalized intersections along Struthers Road have overall operations at or better than LOS C during both the morning and afternoon peak traffic hours. All stop-controlled intersections have turn movement operations at LOS A during the morning peak traffic hour and LOS B or better during the afternoon peak traffic hour.

Without the proposed development, Year 2023 background operational analysis shows that the signalized intersections within the study area experience overall operations at or better than LOS C during both the morning and afternoon peak traffic hours. All stop-controlled intersections expect turn movement operations at or better than LOS B during either peak traffic hour.

By Year 2040 and without the proposed development, the signalized intersections within the study area anticipate overall operations at or better than LOS D during both the morning and afternoon peak traffic hours. All stop-controlled intersections anticipate turn movement operations at or better than LOS B during the morning peak traffic hour and LOS C or better during the afternoon peak traffic hour.

Analysis of future traffic conditions indicates that the addition of site-generated traffic is expected to create no negative impact to traffic operations for the existing and surrounding roadway system. With all conservative assumptions defined in this analysis, the study intersections are projected to operate at future levels of service comparable to Year 2040 background traffic conditions. Proposed site accesses have long-term operations at LOS B or better during peak traffic periods and upon build-out.

This site is subject to the El Paso County Road Impact Fee Program (Resolution 19-471), as amended. An option for payment will be selected at the final land use approval stage.

Unresolved. Please revise report contents to include a sight distance exhibit showing sight distance lines along Struthers Rd. Some opposition has expressed concerns about potential lack of sight distance for vehicles turning onto Struthers Rd. If curious where to find opposition letters please find them on the project page in EDARP. See ECM appendix B for criteria regarding sight distance for access points.

APPENDIX A

Traffic Count Data


Location: 1 STRUTHERS RD & BAPTIST RD AM

Date: Thursday, July 29, 2021


Peak Hour: 08:00 AM - 09:00 AM

Peak 15-Minutes: 08:15 AM - 08:30 AM

Peak Hour - All Vehicles

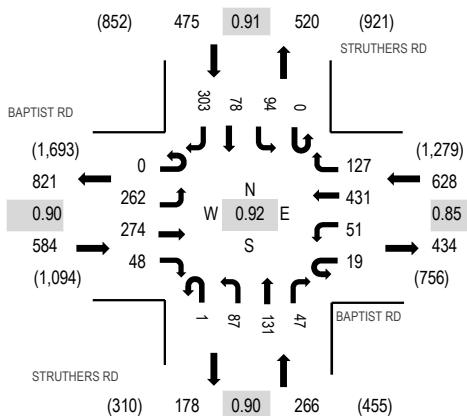

Peak Hour - Pedestrians/Bicycles on Crosswalk

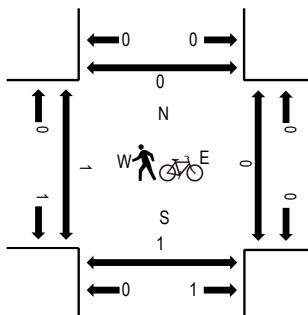

Note: Total study counts contained in parentheses.

Traffic Counts

Interval Start Time	BAPTIST RD				BAPTIST RD				STRUTHERS RD				STRUTHERS RD				Rolling Hour	Pedestrian Crossings				
	Eastbound		Westbound		Northbound		Southbound		Total		West	East	South		North							
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right						
7:00 AM	0	61	39	4	2	9	95	12	1	24	12	5	0	9	16	64	353	1,727	0	0	0	0
7:15 AM	0	50	72	5	2	9	151	13	1	16	15	10	0	10	8	68	430	1,794	0	0	0	0
7:30 AM	0	66	55	6	3	12	159	21	0	20	21	8	0	10	21	64	466	1,896	0	0	1	0
7:45 AM	0	75	69	8	0	15	120	28	0	21	27	8	0	20	17	70	478	1,939	1	0	0	1
8:00 AM	0	57	61	10	5	8	87	26	0	24	25	12	0	17	12	76	420	1,953	0	0	0	0
8:15 AM	0	60	76	14	2	13	126	37	0	37	30	7	0	23	18	89	532	1	0	1	0	
8:30 AM	0	73	62	8	7	12	120	31	0	11	41	17	0	29	20	78	509	0	0	0	0	
8:45 AM	0	72	75	16	5	18	98	33	1	15	35	11	0	25	28	60	492	0	0	0	0	
Count Total	0	514	509	71	26	96	956	201	3	168	206	78	0	143	140	569	3,680	2	0	2	1	
Peak Hour	0	262	274	48	19	51	431	127	1	87	131	47	0	94	78	303	1,953	1	0	1	0	


Location: 1 STRUTHERS RD & BAPTIST RD PM

Date: Thursday, July 29, 2021


Peak Hour: 04:45 PM - 05:45 PM

Peak 15-Minutes: 05:30 PM - 05:45 PM

Peak Hour - All Vehicles

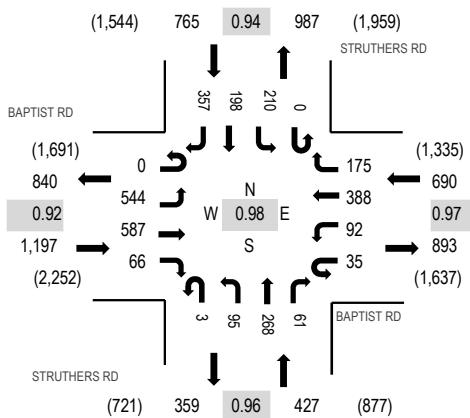

Peak Hour - Pedestrians/Bicycles on Crosswalk

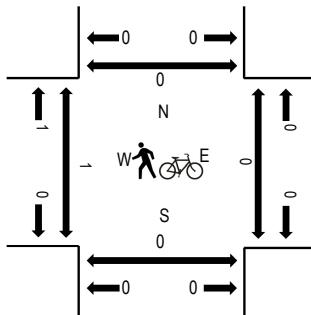

Note: Total study counts contained in parentheses.

Traffic Counts

Interval Start Time	BAPTIST RD Eastbound				BAPTIST RD Westbound				STRUTHERS RD Northbound				STRUTHERS RD Southbound				Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	Total	West	East	South	North	
4:00 PM	0	134	112	16	7	20	94	47	0	26	72	14	0	41	54	112	749	3,004	0	0	0	1
4:15 PM	0	132	118	17	4	17	79	40	1	19	78	19	0	52	49	91	716	3,004	0	0	0	0
4:30 PM	0	155	116	28	13	21	110	35	0	23	73	20	0	47	51	92	784	3,075	0	0	0	0
4:45 PM	0	143	144	12	12	25	87	43	0	27	57	19	0	48	52	86	755	3,079	0	0	0	0
5:00 PM	0	115	126	17	5	22	105	41	1	27	67	16	0	58	50	99	749	3,004	0	0	0	0
5:15 PM	0	149	159	19	9	23	96	48	0	23	68	13	0	53	47	80	787	0	0	0	0	
5:30 PM	0	137	158	18	9	22	100	43	2	18	76	13	0	51	49	92	788	1	0	0	0	
5:45 PM	1	105	108	13	10	26	89	33	1	25	68	11	0	52	48	90	680	0	0	0	0	
Count Total	1	1,070	1,041	140	69	176	760	330	5	188	559	125	0	402	400	742	6,008	1	0	0	1	
Peak Hour	0	544	587	66	35	92	388	175	3	95	268	61	0	210	198	357	3,079	1	0	0	0	


Location: 2 STRUTHERS RD & SPANISH BIT DR AM

Date: Thursday, July 29, 2021


Peak Hour: 08:00 AM - 09:00 AM

Peak 15-Minutes: 08:45 AM - 09:00 AM

Peak Hour - All Vehicles

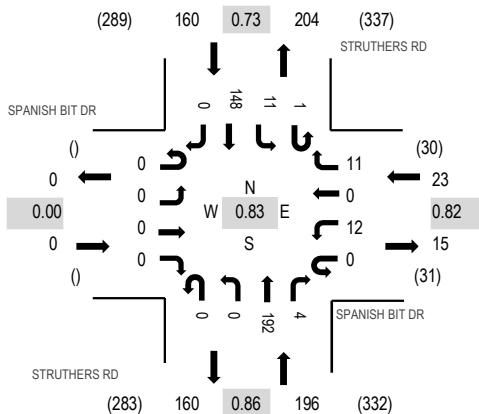

Peak Hour - Pedestrians/Bicycles on Crosswalk

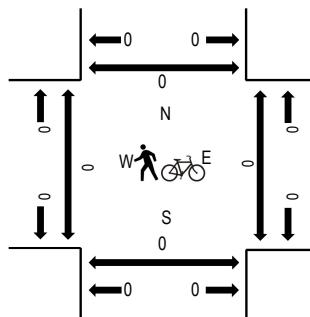

Note: Total study counts contained in parentheses.

Traffic Counts

Interval Start Time	SPANISH BIT DR Eastbound				SPANISH BIT DR Westbound				STRUTHERS RD Northbound				STRUTHERS RD Southbound				Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	Total	West	East	South	North	
7:00 AM	0	0	0	0	0	1	0	0	1	0	19	2	1	0	20	0	44	272	0	0	0	0
7:15 AM	0	0	0	0	0	1	0	1	0	0	31	1	1	1	29	0	65	295	0	0	0	0
7:30 AM	0	0	0	0	0	1	0	2	0	0	31	4	0	1	25	0	64	326	0	1	0	0
7:45 AM	0	0	0	0	0	0	0	1	0	0	46	1	0	6	45	0	99	364	0	1	0	0
8:00 AM	0	0	0	0	0	1	0	2	0	0	35	1	0	2	26	0	67	379	0	0	0	0
8:15 AM	0	0	0	0	0	4	0	3	0	0	49	1	0	5	34	0	96	0	0	0	0	0
8:30 AM	0	0	0	0	0	5	0	2	0	0	56	1	0	4	34	0	102	0	0	0	0	0
8:45 AM	0	0	0	0	0	2	0	4	0	0	52	1	1	0	54	0	114	0	0	0	0	0
Count Total	0	0	0	0	0	15	0	15	1	0	319	12	3	19	267	0	651	0	2	0	0	0
Peak Hour	0	0	0	0	0	12	0	11	0	0	192	4	1	11	148	0	379	0	0	0	0	0


Location: 2 STRUTHERS RD & SPANISH BIT DR PM

Date: Thursday, July 29, 2021


Peak Hour: 04:00 PM - 05:00 PM

Peak 15-Minutes: 04:15 PM - 04:30 PM

Peak Hour - All Vehicles

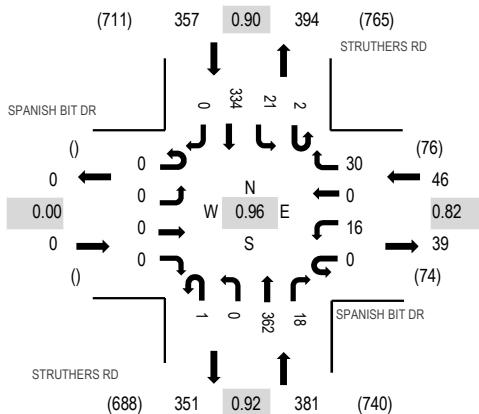

Peak Hour - Pedestrians/Bicycles on Crosswalk

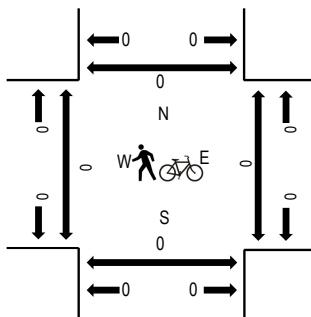

Note: Total study counts contained in parentheses.

Traffic Counts

Interval Start Time	SPANISH BIT DR Eastbound				SPANISH BIT DR Westbound				STRUTHERS RD Northbound				STRUTHERS RD Southbound				Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	Total	West	East	South	North	
4:00 PM	0	0	0	0	0	4	0	8	1	0	91	3	0	4	79	0	190	784	0	0	0	0
4:15 PM	0	0	0	0	0	5	0	8	0	0	96	8	0	6	81	0	204	763	0	0	0	0
4:30 PM	0	0	0	0	0	5	0	9	0	0	91	3	1	4	79	0	192	756	0	0	0	0
4:45 PM	0	0	0	0	0	2	0	5	0	0	84	4	1	7	95	0	198	749	0	0	0	0
5:00 PM	0	0	0	0	0	0	0	6	0	0	79	0	0	3	81	0	169	743	0	0	0	0
5:15 PM	0	0	0	0	0	4	0	5	0	0	93	2	0	10	83	0	197	0	0	0	0	0
5:30 PM	0	0	0	0	0	3	0	4	0	0	84	4	0	5	85	0	185	0	0	0	0	0
5:45 PM	0	0	0	0	0	1	0	7	0	0	93	4	0	7	80	0	192	0	0	0	0	0
Count Total	0	0	0	0	0	24	0	52	1	0	711	28	2	46	663	0	1,527	0	0	0	0	0
Peak Hour	0	0	0	0	0	16	0	30	1	0	362	18	2	21	334	0	784	0	0	0	0	0


Location: 3 BIG R ACCESS & SPANISH BIT DR AM

Date: Thursday, July 29, 2021


Peak Hour: 08:00 AM - 09:00 AM

Peak 15-Minutes: 08:15 AM - 08:30 AM

Peak Hour - All Vehicles

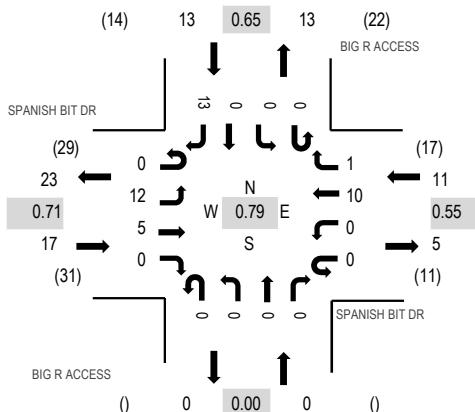

Peak Hour - Pedestrians/Bicycles on Crosswalk

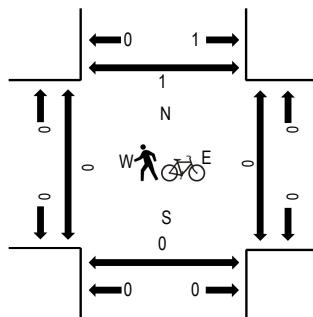

Note: Total study counts contained in parentheses.

Traffic Counts

Interval Start Time	SPANISH BIT DR				SPANISH BIT DR				BIG R ACCESS				BIG R ACCESS				Pedestrian Crossings						
	Eastbound				Westbound				Northbound				Southbound					Rolling Hour	West	East	South	North	
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	Total						
7:00 AM	0	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	2	21	0	0	0	1	
7:15 AM	0	1	0	0	0	0	1	0	0	0	0	0	0	0	0	0	2	26	0	0	0	1	
7:30 AM	0	4	3	0	0	0	3	0	0	0	0	0	0	0	0	0	10	37	0	0	0	0	
7:45 AM	0	4	1	0	0	0	1	0	0	0	0	0	0	0	1	0	0	7	37	0	0	0	1
8:00 AM	0	3	0	0	0	0	1	0	0	0	0	0	0	0	0	0	3	7	41	0	0	0	0
8:15 AM	0	3	2	0	0	0	5	0	0	0	0	0	0	0	0	0	3	13	0	0	0	0	
8:30 AM	0	4	1	0	0	0	2	1	0	0	0	0	0	0	0	0	2	10	0	0	0	0	
8:45 AM	0	2	2	0	0	0	2	0	0	0	0	0	0	0	0	0	5	11	0	0	0	1	
Count Total	0	21	10	0	0	0	16	1	0	0	0	0	0	0	1	0	13	62	0	0	0	4	
Peak Hour	0	12	5	0	0	0	10	1	0	0	0	0	0	0	0	0	13	41	0	0	0	1	


Location: 3 BIG R ACCESS & SPANISH BIT DR PM

Date: Thursday, July 29, 2021


Peak Hour: 04:00 PM - 05:00 PM

Peak 15-Minutes: 04:15 PM - 04:30 PM

Peak Hour - All Vehicles

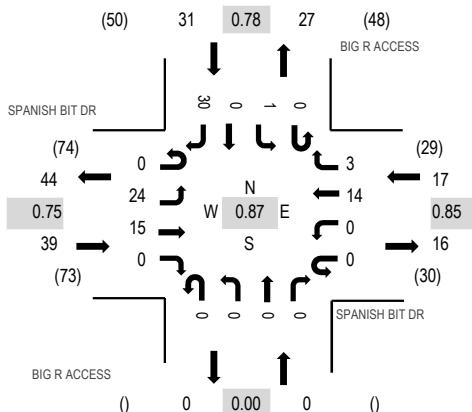

Peak Hour - Pedestrians/Bicycles on Crosswalk

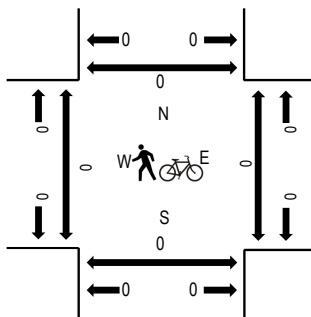

Note: Total study counts contained in parentheses.

Traffic Counts

Interval Start Time	SPANISH BIT DR Eastbound				SPANISH BIT DR Westbound				BIG R ACCESS Northbound				BIG R ACCESS Southbound				Rolling Hour	Pedestrian Crossings					
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	Total	West	East	South	North		
4:00 PM	0	4	4	0	0	0	4	1	0	0	0	0	0	0	0	0	10	23	87	0	0	0	0
4:15 PM	0	8	5	0	0	0	4	0	0	0	0	0	0	0	0	0	8	25	76	0	0	0	0
4:30 PM	0	6	1	0	0	0	4	1	0	0	0	0	0	0	0	0	8	20	70	0	0	0	0
4:45 PM	0	6	5	0	0	0	2	1	0	0	0	0	0	0	1	0	4	19	64	0	0	0	0
5:00 PM	0	2	2	0	0	0	4	0	0	0	0	0	0	0	0	0	4	12	65	0	0	0	0
5:15 PM	0	7	5	0	0	0	4	0	0	0	0	0	0	0	0	0	3	19	0	0	0	0	0
5:30 PM	0	4	2	0	0	0	1	0	0	0	0	0	0	0	0	0	7	14	0	0	0	0	0
5:45 PM	0	7	5	0	0	0	2	1	0	0	0	0	0	0	0	0	5	20	0	0	0	0	0
Count Total	0	44	29	0	0	0	25	4	0	0	0	0	0	0	1	0	49	152	0	0	0	0	0
Peak Hour	0	24	15	0	0	0	14	3	0	0	0	0	0	0	1	0	30	87	0	0	0	0	0

All Traffic Data Services
www.alltrafficdata.net

Page 1

Date Start: 29-Jul-21

Site Code: 4

Station ID: 4

STRUTHERS RD N.O. SPANISH BIT DR

Start Time	29-Jul-21 Thu	NB	SB	Total
12:00 AM				22
01:00	4	5		9
02:00	5	1		6
03:00	5	3		8
04:00	22	8		30
05:00	33	9		42
06:00	77	47		124
07:00	135	127		262
08:00	195	159		354
09:00	257	221		478
10:00	301	270		571
11:00	321	338		659
12:00 PM	347	355		702
01:00	350	358		708
02:00	307	332		639
03:00	377	333		710
04:00	396	358		754
05:00	371	354		725
06:00	282	297		579
07:00	208	241		449
08:00	168	186		354
09:00	95	117		212
10:00	34	52		86
11:00	18	19		37
Total Percent	4319	4201		8520
AM Peak Vol.	-	11:00	-	-
PM Peak Vol.	-	321	338	-
Grand Total Percent	50.7%	49.3%		
ADT	ADT 8,520	AADT 8,520		

APPENDIX B

Internal Capture Worksheets

NCHRP 684 Internal Trip Capture Estimation Tool					
Project Name:	Cathedral Rock Commons		Organization:	SM ROCHA, LLC	
Project Location:	NEC Stuthers Road & Spanish Bit Drive		Performed By:	Brandon Wilson	
Scenario Description:			Date:	1/7/2022	
Analysis Year:	Development Built-Out		Checked By:		
Analysis Period:	AM Street Peak Hour		Date:		

Table 1-A: Base Vehicle-Trip Generation Estimates (Single-Use Site Estimate)						
Land Use	Development Data (For Information Only)			Estimated Vehicle-Trips ³		
	ITE LUCs ¹	Quantity	Units	Total	Entering	Exiting
Office				0		
Retail	820	29	KSF	27	17	10
Restaurant				0		
Cinema/Entertainment				0		
Residential	221	120	DU	43	11	32
Hotel				0		
All Other Land Uses ²	565	10	KSF	110	58	52
				180	86	94

Table 2-A: Mode Split and Vehicle Occupancy Estimates						
Land Use	Entering Trips			Exiting Trips		
	Veh. Occ. ⁴	% Transit	% Non-Motorized	Veh. Occ. ⁴	% Transit	% Non-Motorized
Office						
Retail	1.17	0%	0%	1.16	0%	0%
Restaurant						
Cinema/Entertainment						
Residential	1.13	0%	4%	1.09	0%	2%
Hotel						
All Other Land Uses ²	1.00	0%	0%	1.00	0%	0%

Table 3-A: Average Land Use Interchange Distances (Feet Walking Distance)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office						
Retail						
Restaurant						
Cinema/Entertainment						
Residential						
Hotel						

Table 4-A: Internal Person-Trip Origin-Destination Matrix*						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	0		0	0	0	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	0	0	0	0		0
Hotel	0	0	0	0	0	

Table 5-A: Computations Summary				Table 6-A: Internal Trip Capture Percentages by Land Use		
	Total	Entering	Exiting	Land Use	Entering Trips	Exiting Trips
All Person-Trips	189	90	99	Office	N/A	N/A
Internal Capture Percentage	0%	0%	0%	Retail	0%	0%
External Vehicle-Trips ⁵	179	86	93	Restaurant	N/A	N/A
External Transit-Trips ⁶	0	0	0	Cinema/Entertainment	N/A	N/A
External Non-Motorized Trips ⁶	1	0	1	Residential	0%	0%
				Hotel	N/A	N/A

¹Land Use Codes (LUCs) from *Trip Generation Manual*, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator.

³Enter trips assuming no transit or non-motorized trips (as assumed in ITE *Trip Generation Manual*).

⁴Enter vehicle occupancy assumed in Table 1-A vehicle trips. If vehicle occupancy changes for proposed mixed-use project, manual adjustments must be made to Tables 5-A, 9-A (O and D). Enter transit, non-motorized percentages that will result with proposed mixed-use project complete.

⁵Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A.

⁶Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Project Name:	Cathedral Rock Commons
Analysis Period:	AM Street Peak Hour

Table 7-A: Conversion of Vehicle-Trip Ends to Person-Trip Ends

Land Use	Table 7-A (D): Entering Trips			Table 7-A (O): Exiting Trips		
	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.17	17	20	1.16	10	12
Restaurant	1.00	0	0	1.00	0	0
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1.13	11	12	1.09	32	35
Hotel	1.00	0	0	1.00	0	0

Table 8-A (O): Internal Person-Trip Origin-Destination Matrix (Computed at Origin)

Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	3		2	0	2	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	1	0	7	0		0
Hotel	0	0	0	0	0	

Table 8-A (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination)

Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		6	0	0	0	0
Retail	0		0	0	0	0
Restaurant	0	2		0	1	0
Cinema/Entertainment	0	0	0		0	0
Residential	0	3	0	0		0
Hotel	0	1	0	0	0	

Table 9-A (D): Internal and External Trips Summary (Entering Trips)

Destination Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	0	20	20	17	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	0	12	12	11	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	58	58	58	0	0

Table 9-A (O): Internal and External Trips Summary (Exiting Trips)

Origin Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	0	12	12	10	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	0	35	35	31	0	1
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	52	52	52	0	0

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A

²Person-Trips

³Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator

*Indicates computation that has been rounded to the nearest whole number.

NCHRP 684 Internal Trip Capture Estimation Tool					
Project Name:	Cathedral Rock Commons		Organization:	SM ROCHA, LLC	
Project Location:	NEC Stuthers Road & Spanish Bit Drive		Performed By:	Brandon Wilson	
Scenario Description:			Date:	1/7/2022	
Analysis Year:	Development Built-Out		Checked By:		
Analysis Period:	PM Street Peak Hour		Date:		

Table 1-P: Base Vehicle-Trip Generation Estimates (Single-Use Site Estimate)

Land Use	Development Data (For Information Only)			Estimated Vehicle-Trips ³		
	ITE LUCs ¹	Quantity	Units	Total	Entering	Exiting
Office				0		
Retail	820	29	KSF	110	53	57
Restaurant				0		
Cinema/Entertainment				0		
Residential	221	120	DU	53	32	21
Hotel				0		
All Other Land Uses ²	565	10	KSF	111	52	59
				274	137	137

Table 2-P: Mode Split and Vehicle Occupancy Estimates

Land Use	Entering Trips			Exiting Trips		
	Veh. Occ. ⁴	% Transit	% Non-Motorized	Veh. Occ. ⁴	% Transit	% Non-Motorized
Office						
Retail	1.21	0%	0%	1.18	0%	0%
Restaurant						
Cinema/Entertainment						
Residential	1.15	0%	3%	1.21	0%	4%
Hotel						
All Other Land Uses ²	1.00	0%	0%	1.00	0%	0%

Table 3-P: Average Land Use Interchange Distances (Feet Walking Distance)

Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office						
Retail						
Restaurant						
Cinema/Entertainment						
Residential						
Hotel						

Table 4-P: Internal Person-Trip Origin-Destination Matrix*

Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	0		0	0	17	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	0	6	0	0		0
Hotel	0	0	0	0	0	

Table 5-P: Computations Summary

	Total	Entering	Exiting
All Person-Trips	304	153	151
Internal Capture Percentage	15%	15%	15%
External Vehicle-Trips ⁵	233	117	116
External Transit-Trips ⁶	0	0	0
External Non-Motorized Trips ⁶	2	1	1

Table 6-P: Internal Trip Capture Percentages by Land Use

Land Use	Entering Trips	Exiting Trips
Office	N/A	N/A
Retail	9%	25%
Restaurant	N/A	N/A
Cinema/Entertainment	N/A	N/A
Residential	46%	24%
Hotel	N/A	N/A

¹Land Use Codes (LUCs) from *Trip Generation Manual*, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator.

³Enter trips assuming no transit or non-motorized trips (as assumed in ITE *Trip Generation Manual*).

⁴Enter vehicle occupancy assumed in Table 1-P vehicle trips. If vehicle occupancy changes for proposed mixed-use project, manual adjustments must be

⁵Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P.

⁶Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Project Name:	Cathedral Rock Commons
Analysis Period:	PM Street Peak Hour

Table 7-P: Conversion of Vehicle-Trip Ends to Person-Trip Ends

Land Use	Table 7-P (D): Entering Trips			Table 7-P (O): Exiting Trips		
	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.21	53	64	1.18	57	67
Restaurant	1.00	0	0	1.00	0	0
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1.15	32	37	1.21	21	25
Hotel	1.00	0	0	1.00	0	0

Table 8-P (O): Internal Person-Trip Origin-Destination Matrix (Computed at Origin)

Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	1		19	3	17	3
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	1	11	5	0		1
Hotel	0	0	0	0	0	

Table 8-P (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination)

Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		5	0	0	1	0
Retail	0		0	0	17	0
Restaurant	0	32		0	6	0
Cinema/Entertainment	0	3	0		1	0
Residential	0	6	0	0		0
Hotel	0	1	0	0	0	

Table 9-P (D): Internal and External Trips Summary (Entering Trips)

Destination Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	6	58	64	48	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	17	20	37	17	0	1
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	52	52	52	0	0

Table 9-P (O): Internal and External Trips Summary (Exiting Trips)

Origin Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	17	50	67	42	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	6	19	25	15	0	1
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	59	59	59	0	0

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P

²Person-Trips

³Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator

*Indicates computation that has been rounded to the nearest whole number.

APPENDIX C

Level of Service Definitions

The following information can be found in the [Highway Capacity Manual](#), Transportation Research Board, 2016:
Chapter 19 – Signalized Intersections and Chapter 20 – Two-Way Stop Controlled Intersections.

Automobile Level of Service (LOS) for Signalized Intersections

Levels of service are defined to represent reasonable ranges in control delay.

LOS A

Describes operations with a control delay of 10 s/veh or less and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is low and either progression is exceptionally favorable or the cycle length is very short. If it is due to favorable progression, most vehicles arrive during the green indication and travel through the intersection without stopping.

LOS B

Describes operations with control delay between 10 and 20 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is low and either progression is highly favorable or the cycle length is short. More vehicles stop than with LOS A.

LOS C

Describes operations with control delay between 20 and 35 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when progression is favorable or the cycle length is moderate. Individual *cycle failures* (i.e., one or more queued vehicles are not able to depart as a result of insufficient capacity during the cycle) may begin to appear at this level. The number of vehicles stopping is significant, although many vehicles still pass through the intersection without stopping.

LOS D

Describes operations with control delay between 35 and 55 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is high and either progression is ineffective or the cycle length is long. Many vehicles stop and individual cycle failures are noticeable.

LOS E

Describes operations with control delay between 55 and 80 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is high, progression is unfavorable, and the cycle length is long. Individual cycle failures are frequent.

LOS F

Describes operations with control delay exceeding 80 s/veh or a volume-to-capacity ratio greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is very high, progression is very poor, and the cycle length is long. Most cycles fail to clear the queue.

Level of Service (LOS) for Unsignalized TWSC Intersections

Level of Service ($v/c \leq 1.0$)	Average Control Delay (s/veh)
A	0 - 10
B	> 10 - 15
C	> 15 - 25
D	> 25 - 35
E	> 35 - 50
F	> 50

APPENDIX D

Capacity Worksheets

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Existing Traffic Volumes

AM Peak Hour

	↑	→	↓	↖	↗	↙	↖	↗	↙	↑	→	↓	↖	↗	↙	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT				
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑				
Traffic Volume (vph)	262	274	48	19	51	431	127	88	131	47	94	78				
Future Volume (vph)	262	274	48	19	51	431	127	88	131	47	94	78				
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539				
Flt Permitted	0.950				0.950				0.950			0.950				
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539				
Satd. Flow (RTOR)			127					177				182				
Lane Group Flow (vph)	285	298	52	0	76	468	138	96	142	51	102	85				
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA				
Protected Phases	7	4		3	3	8		5	2		1	6				
Permitted Phases			4				8			2						
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6				
Switch Phase																
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0				
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0				
Total Split (s)	26.0	48.0	48.0	14.0	14.0	36.0	36.0	15.0	43.0	43.0	15.0	43.0				
Total Split (%)	21.7%	40.0%	40.0%	11.7%	11.7%	30.0%	30.0%	12.5%	35.8%	35.8%	12.5%	35.8%				
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0				
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0				
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0				
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag				
Lead-Lag Optimize?	Yes															
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None				
Act Effct Green (s)	12.6	43.2	43.2		7.3	34.9	34.9	7.8	9.6	9.6	7.9	9.7				
Actuated g/C Ratio	0.15	0.50	0.50		0.08	0.41	0.41	0.09	0.11	0.11	0.09	0.11				
v/c Ratio	0.57	0.17	0.06		0.26	0.33	0.18	0.31	0.36	0.15	0.32	0.21				
Control Delay	40.5	14.7	0.1		42.4	20.1	2.3	42.3	39.8	0.9	42.3	38.2				
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Total Delay	40.5	14.7	0.1		42.4	20.1	2.3	42.3	39.8	0.9	42.3	38.2				
LOS	D	B	A		D	C	A	D	D	A	D	D				
Approach Delay		25.1				19.0			33.8			23.1				
Approach LOS		C				B			C			C				
Queue Length 50th (ft)	78	50	0		21	92	0	26	40	0	28	23				
Queue Length 95th (ft)	125	88	0		45	158	22	54	71	0	57	46				
Internal Link Dist (ft)		668				783			3774			650				
Turn Bay Length (ft)	430		190		265		535	430		280	140					
Base Capacity (vph)	838	1778	858		347	1435	747	388	1560	799	388	1560				
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0				
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0				
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0				
Reduced v/c Ratio	0.34	0.17	0.06		0.22	0.33	0.18	0.25	0.09	0.06	0.26	0.05				

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 85.9

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.70

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Existing Traffic Volumes

AM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	303
Future Volume (vph)	303
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	329
Lane Group Flow (vph)	329
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	43.0
Total Split (%)	35.8%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	9.7
Actuated g/C Ratio	0.11
v/c Ratio	0.70
Control Delay	13.3
Queue Delay	0.0
Total Delay	13.3
LOS	B
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	0
Queue Length 95th (ft)	79
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	881
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.37
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Existing Traffic Volumes

AM Peak Hour

Intersection Signal Delay: 23.8


Intersection LOS: C

Intersection Capacity Utilization 49.8%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

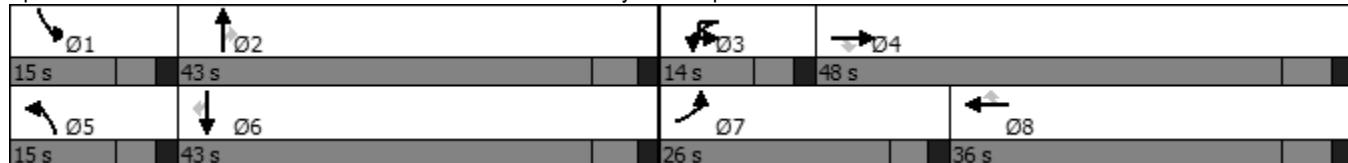

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Existing Traffic Volumes
AM Peak Hour

Intersection						
Int Delay, s/veh	0.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		↑↑		↑	↑↑
Traffic Vol, veh/h	12	11	192	4	12	148
Future Vol, veh/h	12	11	192	4	12	148
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	13	12	209	4	13	161

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	318	107	0	0	213
Stage 1	211	-	-	-	-
Stage 2	107	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	650	926	-	-	1355
Stage 1	804	-	-	-	-
Stage 2	906	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	644	926	-	-	1355
Mov Cap-2 Maneuver	644	-	-	-	-
Stage 1	804	-	-	-	-
Stage 2	897	-	-	-	-

Approach	WB	NB	SB		
HCM Control Delay, s	9.9	0	0.6		
HCM LOS	A				

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	754	1355	-
HCM Lane V/C Ratio	-	-	0.033	0.01	-
HCM Control Delay (s)	-	-	9.9	7.7	-
HCM Lane LOS	-	-	A	A	-
HCM 95th %tile Q(veh)	-	-	0.1	0	-

HCM 6th TWSC
4: Spanish Bit Drive & Big R Stores Access

Existing Traffic Volumes
AM Peak Hour

Intersection

Int Delay, s/veh 4.8

Movement	SEL	SER	NEL	NET	SWT	SWR
Lane Configurations	W		↑	↑		
Traffic Vol, veh/h	0	13	12	5	10	1
Future Vol, veh/h	0	13	12	5	10	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	14	13	5	11	1


Major/Minor	Minor2	Major1	Major2			
Conflicting Flow All	43	12	12	0	-	0
Stage 1	12	-	-	-	-	-
Stage 2	31	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	968	1069	1607	-	-	-
Stage 1	1011	-	-	-	-	-
Stage 2	992	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	960	1069	1607	-	-	-
Mov Cap-2 Maneuver	960	-	-	-	-	-
Stage 1	1003	-	-	-	-	-
Stage 2	992	-	-	-	-	-

Approach	SE	NE	SW
HCM Control Delay, s	8.4	5.1	0
HCM LOS	A		

Minor Lane/Major Mvmt	NEL	NET	SELn1	SWT	SWR
Capacity (veh/h)	1607	-	1069	-	-
HCM Lane V/C Ratio	0.008	-	0.013	-	-
HCM Control Delay (s)	7.3	0	8.4	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0	-	0	-	-

Timings
14: North Gate Boulevard & Struthers Road

Existing Traffic Volumes
AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	108	489	654	278	482	507
Future Volume (vph)	108	489	654	278	482	507
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.189				0.950	
Satd. Flow (perm)	683	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				302		279
Lane Group Flow (vph)	117	532	711	302	524	551
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	11.0	33.6	22.6	22.6	26.4	26.4
Total Split (%)	18.3%	56.0%	37.7%	37.7%	44.0%	44.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	23.4	23.4	15.1	15.1	20.7	20.7
Actuated g/C Ratio	0.41	0.41	0.27	0.27	0.37	0.37
v/c Ratio	0.22	0.36	0.75	0.47	0.41	0.73
Control Delay	10.1	11.6	25.0	5.3	15.9	15.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.1	11.6	25.0	5.3	15.9	15.7
LOS	B	B	C	A	B	B
Approach Delay		11.3	19.1		15.8	
Approach LOS		B	B		B	
Queue Length 50th (ft)	11	60	121	0	74	80
Queue Length 95th (ft)	23	91	176	49	112	#239
Internal Link Dist (ft)		412	442		446	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	531	1761	1059	685	1263	758
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.22	0.30	0.67	0.44	0.41	0.73

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 56.4

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.75

Timings

14: North Gate Boulevard & Struthers Road

Existing Traffic Volumes

AM Peak Hour

Intersection Signal Delay: 16.0

Intersection LOS: B

Intersection Capacity Utilization 59.5%


ICU Level of Service B

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 14: North Gate Boulevard & Struthers Road

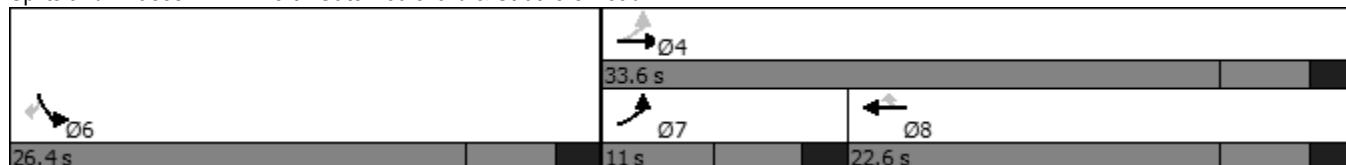

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Existing Traffic Volumes

PM Peak Hour

	↑ ↗	→	↗ ↓	↖	↙ ←	↖ ↙	↖ ↘	↑ ↗	↗ ↓	↖	↖ ↙	↖ ↘	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	
Traffic Volume (vph)	544	587	66	35	92	388	175	98	268	61	210	198	
Future Volume (vph)	544	587	66	35	92	388	175	98	268	61	210	198	
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539	
Flt Permitted	0.950				0.950			0.950			0.950		
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539	
Satd. Flow (RTOR)				177				227			232		
Lane Group Flow (vph)	591	638	72	0	138	422	190	107	291	66	228	215	
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA	
Protected Phases	7	4			3	3	8		5	2		1	6
Permitted Phases				4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6	
Switch Phase													
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0	
Total Split (s)	37.0	51.0	51.0	16.0	16.0	30.0	30.0	14.0	33.0	33.0	20.0	39.0	
Total Split (%)	30.8%	42.5%	42.5%	13.3%	13.3%	25.0%	25.0%	11.7%	27.5%	27.5%	16.7%	32.5%	
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0	
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	
Lead-Lag Optimize?	Yes												
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None	
Act Effct Green (s)	22.8	44.7	44.7		9.1	31.0	31.0	7.9	13.8	13.8	11.9	17.8	
Actuated g/C Ratio	0.22	0.43	0.43		0.09	0.30	0.30	0.08	0.13	0.13	0.12	0.17	
v/c Ratio	0.78	0.42	0.09		0.46	0.40	0.30	0.41	0.62	0.16	0.58	0.35	
Control Delay	45.6	22.1	0.2		50.7	31.9	3.7	51.6	48.5	0.8	49.9	39.2	
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	45.6	22.1	0.2		50.7	31.9	3.7	51.6	48.5	0.8	49.9	39.2	
LOS	D	C	A		D	C	A	D	D	A	D	D	
Approach Delay		31.6				28.2			42.4			28.3	
Approach LOS		C				C			D			C	
Queue Length 50th (ft)	190	150	0		45	116	0	35	96	0	74	66	
Queue Length 95th (ft)	252	224	0		80	191	35	67	145	0	119	103	
Internal Link Dist (ft)		668				783			3774			650	
Turn Bay Length (ft)	430		190		265			535	430		280	140	
Base Capacity (vph)	1053	1534	786		351	1065	635	284	931	587	484	1138	
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0	
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0	
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0	
Reduced v/c Ratio	0.56	0.42	0.09		0.39	0.40	0.30	0.38	0.31	0.11	0.47	0.19	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 103

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.78

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Existing Traffic Volumes

PM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	357
Future Volume (vph)	357
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	388
Lane Group Flow (vph)	388
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	39.0
Total Split (%)	32.5%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	17.8
Actuated g/C Ratio	0.17
v/c Ratio	0.65
Control Delay	9.6
Queue Delay	0.0
Total Delay	9.6
LOS	A
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	0
Queue Length 95th (ft)	83
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	772
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.50
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Existing Traffic Volumes

PM Peak Hour

Intersection Signal Delay: 31.5


Intersection LOS: C

Intersection Capacity Utilization 59.2%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

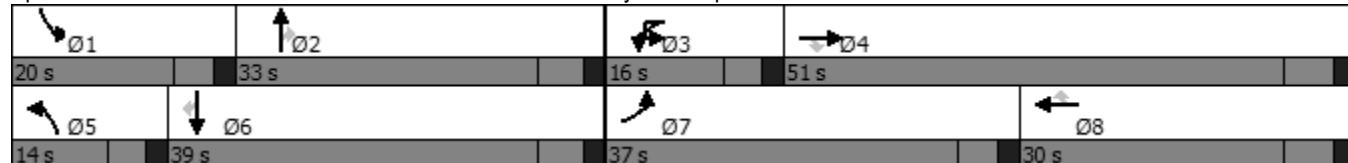

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Existing Traffic Volumes
PM Peak Hour

Intersection						
Int Delay, s/veh	0.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		↑↑		↑	↑↑
Traffic Vol, veh/h	16	30	363	18	23	334
Future Vol, veh/h	16	30	363	18	23	334
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	17	33	395	20	25	363

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	637	208	0	0	415
Stage 1	405	-	-	-	-
Stage 2	232	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	410	798	-	-	1140
Stage 1	642	-	-	-	-
Stage 2	785	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	401	798	-	-	1140
Mov Cap-2 Maneuver	401	-	-	-	-
Stage 1	642	-	-	-	-
Stage 2	768	-	-	-	-

Approach	WB	NB	SB	
HCM Control Delay, s	11.6	0	0.5	
HCM LOS	B			

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	594	1140	-
HCM Lane V/C Ratio	-	-	0.084	0.022	-
HCM Control Delay (s)	-	-	11.6	8.2	-
HCM Lane LOS	-	-	B	A	-
HCM 95th %tile Q(veh)	-	-	0.3	0.1	-

Intersection

Int Delay, s/veh 5

Movement	SEL	SER	NEL	NET	SWT	SWR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	1	30	24	15	14	3
Future Vol, veh/h	1	30	24	15	14	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1	33	26	16	15	3

Major/Minor	Minor2	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	85	17	18	0	-	0
Stage 1	17	-	-	-	-	-
Stage 2	68	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	916	1062	1599	-	-	-
Stage 1	1006	-	-	-	-	-
Stage 2	955	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	901	1062	1599	-	-	-
Mov Cap-2 Maneuver	901	-	-	-	-	-
Stage 1	990	-	-	-	-	-
Stage 2	955	-	-	-	-	-


Approach	SE	NE	SW
----------	----	----	----

HCM Control Delay, s	8.5	4.5	0
HCM LOS	A		

Minor Lane/Major Mvmt	NEL	NET	SELn1	SWT	SWR
Capacity (veh/h)	1599	-	1056	-	-
HCM Lane V/C Ratio	0.016	-	0.032	-	-
HCM Control Delay (s)	7.3	0	8.5	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0.1	-	0.1	-	-

Timings
14: North Gate Boulevard & Struthers Road

Existing Traffic Volumes
PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	417	593	523	479	381	214
Future Volume (vph)	417	593	523	479	381	214
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.269				0.950	
Satd. Flow (perm)	972	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				521		233
Lane Group Flow (vph)	453	645	568	521	414	233
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	14.0	39.0	25.0	25.0	21.0	21.0
Total Split (%)	23.3%	65.0%	41.7%	41.7%	35.0%	35.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	29.2	29.2	15.1	15.1	15.1	15.1
Actuated g/C Ratio	0.52	0.52	0.27	0.27	0.27	0.27
v/c Ratio	0.53	0.35	0.60	0.65	0.45	0.39
Control Delay	9.8	8.5	20.6	6.1	19.8	5.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	9.8	8.5	20.6	6.1	19.8	5.4
LOS	A	A	C	A	B	A
Approach Delay		9.0	13.7		14.6	
Approach LOS		A	B		B	
Queue Length 50th (ft)	39	60	86	0	60	0
Queue Length 95th (ft)	60	88	128	59	102	45
Internal Link Dist (ft)		431	448		420	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	854	2083	1199	881	918	594
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.53	0.31	0.47	0.59	0.45	0.39

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 56.3

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.65

Timings

14: North Gate Boulevard & Struthers Road

Existing Traffic Volumes

PM Peak Hour

Intersection Signal Delay: 12.1


Intersection LOS: B

Intersection Capacity Utilization 52.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 14: North Gate Boulevard & Struthers Road

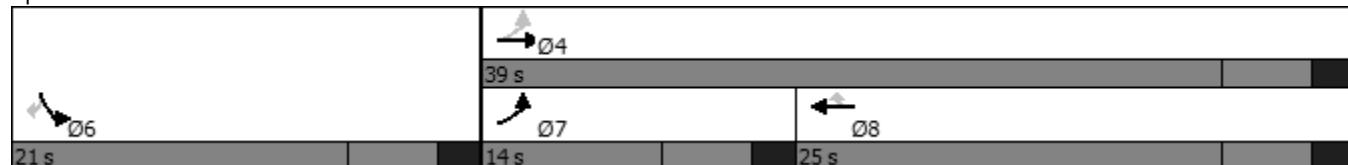

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2023 - AM Peak Hour

	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Group Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	273	330	59	20	48	451	130	160	169	62	124	90
Future Volume (vph)	273	330	59	20	48	451	130	160	169	62	124	90
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950			0.950			0.950	
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			127				177			182		
Lane Group Flow (vph)	297	359	64	0	74	490	141	174	184	67	135	98
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	26.0	48.0	48.0	13.0	13.0	35.0	35.0	19.0	42.0	42.0	17.0	40.0
Total Split (%)	21.7%	40.0%	40.0%	10.8%	10.8%	29.2%	29.2%	15.8%	35.0%	35.0%	14.2%	33.3%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	13.0	42.3	42.3		7.0	33.6	33.6	9.9	10.8	10.8	8.9	9.8
Actuated g/C Ratio	0.14	0.47	0.47		0.08	0.37	0.37	0.11	0.12	0.12	0.10	0.11
v/c Ratio	0.60	0.22	0.08		0.28	0.37	0.20	0.46	0.43	0.19	0.40	0.26
Control Delay	42.4	16.2	0.2		44.5	22.8	2.7	42.9	40.8	1.2	43.2	39.5
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	42.4	16.2	0.2		44.5	22.8	2.7	42.9	40.8	1.2	43.2	39.5
LOS	D	B	A		D	C	A	D	D	A	D	D
Approach Delay		25.6				21.1			35.4			25.1
Approach LOS		C				C			D			C
Queue Length 50th (ft)	84	64	0		21	103	0	49	53	0	38	27
Queue Length 95th (ft)	133	112	0		46	180	25	87	88	0	72	53
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280	140	
Base Capacity (vph)	789	1663	811		288	1321	702	520	1428	747	442	1349
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.38	0.22	0.08		0.26	0.37	0.20	0.33	0.13	0.09	0.31	0.07

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 90

Natural Cycle: 55

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.72

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2023 - AM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	315
Future Volume (vph)	315
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	342
Lane Group Flow (vph)	342
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	40.0
Total Split (%)	33.3%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	9.8
Actuated g/C Ratio	0.11
v/c Ratio	0.72
Control Delay	13.8
Queue Delay	0.0
Total Delay	13.8
LOS	B
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	0
Queue Length 95th (ft)	81
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	815
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.42
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2023 - AM Peak Hour

Intersection Signal Delay: 25.9


Intersection LOS: C

Intersection Capacity Utilization 51.5%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

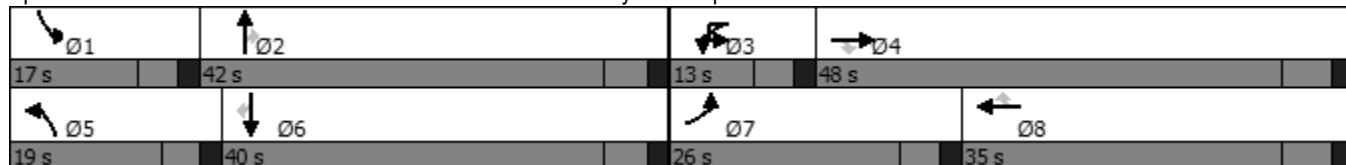

Intersection						
Int Delay, s/veh	0.7					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	12	11	234	4	12	230
Future Vol, veh/h	12	11	234	4	12	230
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	13	12	254	4	13	250
Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	407	129	0	0	258	0
Stage 1	256	-	-	-	-	-
Stage 2	151	-	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14	-
Critical Hdwy Stg 1	5.84	-	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22	-
Pot Cap-1 Maneuver	572	897	-	-	1304	-
Stage 1	763	-	-	-	-	-
Stage 2	861	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	566	897	-	-	1304	-
Mov Cap-2 Maneuver	566	-	-	-	-	-
Stage 1	763	-	-	-	-	-
Stage 2	852	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	10.4	0	0.4			
HCM LOS	B					
Minor Lane/Major Mvmt	NBT	NBR	WBL	Ln1	SBL	SBT
Capacity (veh/h)	-	-	687	1304	-	-
HCM Lane V/C Ratio	-	-	0.036	0.01	-	-
HCM Control Delay (s)	-	-	10.4	7.8	-	-
HCM Lane LOS	-	-	B	A	-	-
HCM 95th %tile Q(veh)	-	-	0.1	0	-	-

HCM 6th TWSC
4: Spanish Bit Drive & Big R Stores Access

Background Traffic Volumes
Year 2023 - AM Peak Hour

Intersection

Int Delay, s/veh 4.9

Movement	SEL	SER	NEL	NET	SWT	SWR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	0	14	12	5	10	1
Future Vol, veh/h	0	14	12	5	10	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	15	13	5	11	1

Major/Minor	Minor2	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	43	12	12	0	-	0
Stage 1	12	-	-	-	-	-
Stage 2	31	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	968	1069	1607	-	-	-
Stage 1	1011	-	-	-	-	-
Stage 2	992	-	-	-	-	-
Platoon blocked, %		-	-	-	-	-
Mov Cap-1 Maneuver	960	1069	1607	-	-	-
Mov Cap-2 Maneuver	960	-	-	-	-	-
Stage 1	1003	-	-	-	-	-
Stage 2	992	-	-	-	-	-


Approach	SE	NE	SW
----------	----	----	----

HCM Control Delay, s	8.4	5.1	0
HCM LOS	A		

Minor Lane/Major Mvmt	NEL	NET	SELn1	SWT	SWR
Capacity (veh/h)	1607	-	1069	-	-
HCM Lane V/C Ratio	0.008	-	0.014	-	-
HCM Control Delay (s)	7.3	0	8.4	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0	-	0	-	-

Timings
14: North Gate Boulevard & Struthers Road

Background Traffic Volumes
Year 2023 - AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	112	509	680	289	501	527
Future Volume (vph)	112	509	680	289	501	527
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.187				0.950	
Satd. Flow (perm)	676	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				314		275
Lane Group Flow (vph)	122	553	739	314	545	573
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	11.0	33.6	22.6	22.6	26.4	26.4
Total Split (%)	18.3%	56.0%	37.7%	37.7%	44.0%	44.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	23.7	23.7	15.4	15.4	20.7	20.7
Actuated g/C Ratio	0.42	0.42	0.27	0.27	0.37	0.37
v/c Ratio	0.23	0.37	0.77	0.48	0.43	0.76
Control Delay	10.2	11.7	25.9	5.3	16.1	17.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.2	11.7	25.9	5.3	16.1	17.7
LOS	B	B	C	A	B	B
Approach Delay		11.4	19.8		16.9	
Approach LOS		B	B		B	
Queue Length 50th (ft)	11	63	127	0	77	91
Queue Length 95th (ft)	24	94	184	50	117	#261
Internal Link Dist (ft)		433	427		429	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	530	1753	1055	692	1257	754
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.23	0.32	0.70	0.45	0.43	0.76

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 56.6

Natural Cycle: 55

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.77

Timings

14: North Gate Boulevard & Struthers Road

Background Traffic Volumes

Year 2023 - AM Peak Hour

Intersection Signal Delay: 16.7

Intersection LOS: B

Intersection Capacity Utilization 61.4%


ICU Level of Service B

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 14: North Gate Boulevard & Struthers Road

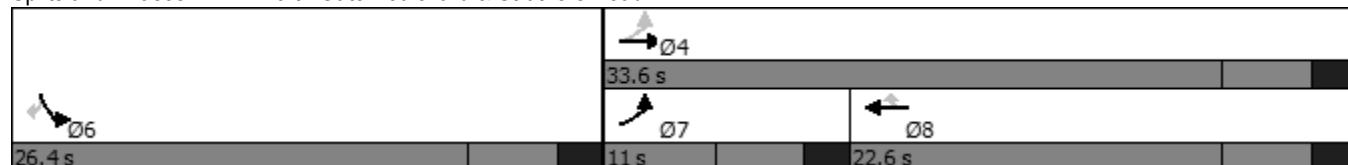

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2023 - PM Peak Hour

	↑	→	↓	↖	↗	↙	↖	↗	↑	↖	↗	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	566	714	94	36	93	446	179	161	323	79	255	218
Future Volume (vph)	566	714	94	36	93	446	179	161	323	79	255	218
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950			0.950			0.950	
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			127				195			182		
Lane Group Flow (vph)	615	776	102	0	140	485	195	175	351	86	277	237
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	37.0	52.9	52.9	15.1	15.1	31.0	31.0	17.0	30.7	30.7	21.3	35.0
Total Split (%)	30.8%	44.1%	44.1%	12.6%	12.6%	25.8%	25.8%	14.2%	25.6%	25.6%	17.8%	29.2%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	24.4	46.6	46.6		8.9	31.0	31.0	10.2	16.0	16.0	13.5	19.3
Actuated g/C Ratio	0.22	0.43	0.43		0.08	0.29	0.29	0.09	0.15	0.15	0.12	0.18
v/c Ratio	0.80	0.51	0.14		0.50	0.48	0.33	0.54	0.67	0.22	0.65	0.38
Control Delay	48.1	25.0	2.6		55.3	36.1	6.9	54.4	50.9	1.3	53.4	41.1
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	48.1	25.0	2.6		55.3	36.1	6.9	54.4	50.9	1.3	53.4	41.1
LOS	D	C	A		E	D	A	D	D	A	D	D
Approach Delay		33.0				32.5			45.0			30.9
Approach LOS		C				C			D			C
Queue Length 50th (ft)	212	207	0		48	148	0	61	124	0	96	78
Queue Length 95th (ft)	274	293	22		86	234	61	102	177	0	146	116
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280	140	
Base Capacity (vph)	1000	1518	751		304	1012	592	365	808	502	501	949
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.61	0.51	0.14		0.46	0.48	0.33	0.48	0.43	0.17	0.55	0.25

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 108.5

Natural Cycle: 65

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.80

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2023 - PM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	371
Future Volume (vph)	371
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	403
Lane Group Flow (vph)	403
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	35.0
Total Split (%)	29.2%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	19.3
Actuated g/C Ratio	0.18
v/c Ratio	0.66
Control Delay	9.5
Queue Delay	0.0
Total Delay	9.5
LOS	A
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	0
Queue Length 95th (ft)	85
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	719
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.56
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2023 - PM Peak Hour

Intersection Signal Delay: 34.3


Intersection LOS: C

Intersection Capacity Utilization 64.3%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

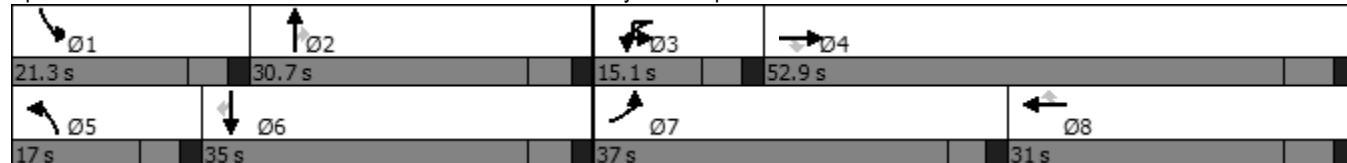

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Background Traffic Volumes
Year 2023 - PM Peak Hour

Intersection						
Int Delay, s/veh	0.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		↑↓		↑	↑↓
Traffic Vol, veh/h	17	31	442	19	24	390
Future Vol, veh/h	17	31	442	19	24	390
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	18	34	480	21	26	424
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	755	251	0	0	501	0
Stage 1	491	-	-	-	-	-
Stage 2	264	-	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14	-
Critical Hdwy Stg 1	5.84	-	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22	-
Pot Cap-1 Maneuver	345	749	-	-	1059	-
Stage 1	581	-	-	-	-	-
Stage 2	756	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	336	749	-	-	1059	-
Mov Cap-2 Maneuver	336	-	-	-	-	-
Stage 1	581	-	-	-	-	-
Stage 2	737	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	12.7	0		0.5		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT	
Capacity (veh/h)	-	-	522	1059	-	
HCM Lane V/C Ratio	-	-	0.1	0.025	-	
HCM Control Delay (s)	-	-	12.7	8.5	-	
HCM Lane LOS	-	-	B	A	-	
HCM 95th %tile Q(veh)	-	-	0.3	0.1	-	

HCM 6th TWSC
4: Spanish Bit Drive & Big R Stores Access

Background Traffic Volumes
Year 2023 - PM Peak Hour

Intersection

Int Delay, s/veh 5

Movement	SEL	SER	NEL	NET	SWT	SWR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	1	31	25	16	15	3
Future Vol, veh/h	1	31	25	16	15	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1	34	27	17	16	3

Major/Minor	Minor2	Major1	Major2
-------------	--------	--------	--------

Conflicting Flow All	89	18	19	0	-	0
Stage 1	18	-	-	-	-	-
Stage 2	71	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	912	1061	1597	-	-	-
Stage 1	1005	-	-	-	-	-
Stage 2	952	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	896	1061	1597	-	-	-
Mov Cap-2 Maneuver	896	-	-	-	-	-
Stage 1	988	-	-	-	-	-
Stage 2	952	-	-	-	-	-


Approach	SE	NE	SW
----------	----	----	----

HCM Control Delay, s	8.5	4.4	0
HCM LOS	A		

Minor Lane/Major Mvmt	NEL	NET	SELn1	SWT	SWR
Capacity (veh/h)	1597	-	1055	-	-
HCM Lane V/C Ratio	0.017	-	0.033	-	-
HCM Control Delay (s)	7.3	0	8.5	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0.1	-	0.1	-	-

Timings
14: North Gate Boulevard & Struthers Road

Background Traffic Volumes
Year 2023 - PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	434	617	544	498	396	223
Future Volume (vph)	434	617	544	498	396	223
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.259				0.950	
Satd. Flow (perm)	936	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				541		242
Lane Group Flow (vph)	472	671	591	541	430	242
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	14.0	39.0	25.0	25.0	21.0	21.0
Total Split (%)	23.3%	65.0%	41.7%	41.7%	35.0%	35.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	Max	None	None	None	Max	Max
Act Effct Green (s)	29.7	29.7	15.6	15.6	15.1	15.1
Actuated g/C Ratio	0.52	0.52	0.27	0.27	0.27	0.27
v/c Ratio	0.56	0.36	0.61	0.65	0.47	0.41
Control Delay	10.1	8.5	20.6	6.1	20.3	5.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.1	8.5	20.6	6.1	20.3	5.4
LOS	B	A	C	A	C	A
Approach Delay		9.2	13.7		14.9	
Approach LOS		A	B		B	
Queue Length 50th (ft)	41	63	91	0	63	0
Queue Length 95th (ft)	62	93	134	60	106	46
Internal Link Dist (ft)		444	431		425	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	842	2063	1188	890	910	597
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.56	0.33	0.50	0.61	0.47	0.41
Intersection Summary						
Cycle Length: 60						
Actuated Cycle Length: 56.8						
Natural Cycle: 50						
Control Type: Actuated-Uncoordinated						
Maximum v/c Ratio: 0.65						

Timings

14: North Gate Boulevard & Struthers Road

Background Traffic Volumes

Year 2023 - PM Peak Hour

Intersection Signal Delay: 12.2


Intersection LOS: B

Intersection Capacity Utilization 53.7%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 14: North Gate Boulevard & Struthers Road

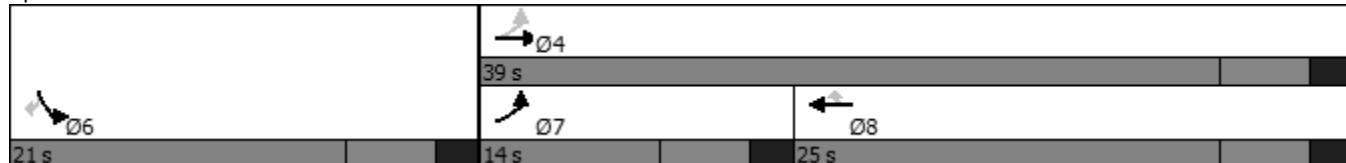

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2040 - AM Peak Hour

	↑	→	↓	↖	↗	↙	↖	↗	↑	↖	↗	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	382	506	79	28	69	781	183	196	224	81	163	123
Future Volume (vph)	382	506	79	28	69	781	183	196	224	81	163	123
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950			0.950			0.950	
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			127				199			182		
Lane Group Flow (vph)	415	550	86	0	105	849	199	213	243	88	177	134
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	24.0	51.5	51.5	13.5	13.5	41.0	41.0	16.0	38.3	38.3	16.7	39.0
Total Split (%)	20.0%	42.9%	42.9%	11.3%	11.3%	34.2%	34.2%	13.3%	31.9%	31.9%	13.9%	32.5%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	16.8	45.4	45.4		7.6	36.2	36.2	10.1	22.2	22.2	10.1	22.2
Actuated g/C Ratio	0.15	0.42	0.42		0.07	0.33	0.33	0.09	0.20	0.20	0.09	0.20
v/c Ratio	0.78	0.37	0.12		0.44	0.72	0.30	0.67	0.34	0.19	0.56	0.19
Control Delay	56.7	24.4	1.7		57.0	38.3	5.8	60.5	37.7	0.9	56.1	35.4
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	56.7	24.4	1.7		57.0	38.3	5.8	60.5	37.7	0.9	56.1	35.4
LOS	E	C	A		E	D	A	E	D	A	E	D
Approach Delay		35.3				34.4			40.7			42.5
Approach LOS		D				C			D			D
Queue Length 50th (ft)	144	140	0		37	284	0	76	77	0	62	41
Queue Length 95th (ft)	#227	214	13		70	405	55	#132	114	0	106	67
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280	140	
Base Capacity (vph)	587	1474	733		254	1175	658	333	1058	601	355	1080
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.71	0.37	0.12		0.41	0.72	0.30	0.64	0.23	0.15	0.50	0.12

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 109

Natural Cycle: 80

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.90

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2040 - AM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	441
Future Volume (vph)	441
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	264
Lane Group Flow (vph)	479
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	39.0
Total Split (%)	32.5%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	22.2
Actuated g/C Ratio	0.20
v/c Ratio	0.90
Control Delay	39.5
Queue Delay	0.0
Total Delay	39.5
LOS	D
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	158
Queue Length 95th (ft)	296
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	666
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.72
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2040 - AM Peak Hour

Intersection Signal Delay: 37.4

Intersection LOS: D

Intersection Capacity Utilization 69.5%


ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

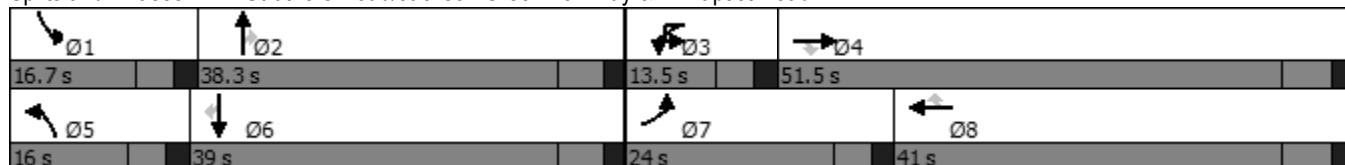

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Background Traffic Volumes
Year 2040 - AM Peak Hour

Intersection

Int Delay, s/veh 0.8

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		↑↓		W	↑↑
Traffic Vol, veh/h	17	16	314	6	17	292
Future Vol, veh/h	17	16	314	6	17	292
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	18	17	341	7	18	317

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	540	174	0	0	348
Stage 1	345	-	-	-	-
Stage 2	195	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	472	839	-	-	1208
Stage 1	688	-	-	-	-
Stage 2	819	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	465	839	-	-	1208
Mov Cap-2 Maneuver	465	-	-	-	-
Stage 1	688	-	-	-	-
Stage 2	807	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	11.5	0	0.4
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	593	1208	-
HCM Lane V/C Ratio	-	-	0.06	0.015	-
HCM Control Delay (s)	-	-	11.5	8	-
HCM Lane LOS	-	-	B	A	-
HCM 95th %tile Q(veh)	-	-	0.2	0	-

HCM 6th TWSC
4: Spanish Bit Drive & Big R Stores Access

Background Traffic Volumes
Year 2040 - AM Peak Hour

Intersection

Int Delay, s/veh 4.9

Movement	SEL	SER	NEL	NET	SWT	SWR
Lane Configurations	W			↑	↑	
Traffic Vol, veh/h	0	19	17	7	15	1
Future Vol, veh/h	0	19	17	7	15	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	21	18	8	16	1


Major/Minor	Minor2	Major1	Major2			
Conflicting Flow All	61	17	17	0	-	0
Stage 1	17	-	-	-	-	-
Stage 2	44	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	945	1062	1600	-	-	-
Stage 1	1006	-	-	-	-	-
Stage 2	978	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	935	1062	1600	-	-	-
Mov Cap-2 Maneuver	935	-	-	-	-	-
Stage 1	995	-	-	-	-	-
Stage 2	978	-	-	-	-	-

Approach	SE	NE	SW
HCM Control Delay, s	8.5	5.2	0
HCM LOS	A		

Minor Lane/Major Mvmt	NEL	NET	SELn1	SWT	SWR
Capacity (veh/h)	1600	-	1062	-	-
HCM Lane V/C Ratio	0.012	-	0.019	-	-
HCM Control Delay (s)	7.3	0	8.5	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0	-	0.1	-	-

Timings
14: North Gate Boulevard & Struthers Road

Background Traffic Volumes
Year 2040 - AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	157	712	953	405	702	739
Future Volume (vph)	157	712	953	405	702	739
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.181				0.950	
Satd. Flow (perm)	654	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				396		264
Lane Group Flow (vph)	171	774	1036	440	763	803
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	11.0	33.0	22.0	22.0	27.0	27.0
Total Split (%)	18.3%	55.0%	36.7%	36.7%	45.0%	45.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	24.6	24.6	16.1	16.1	21.1	21.1
Actuated g/C Ratio	0.43	0.43	0.28	0.28	0.37	0.37
v/c Ratio	0.33	0.51	1.05	0.61	0.61	1.08
Control Delay	11.4	13.4	68.1	7.5	18.2	73.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.4	13.4	68.1	7.5	18.2	73.0
LOS	B	B	E	A	B	E
Approach Delay		13.0	50.0		46.3	
Approach LOS		B	D		D	
Queue Length 50th (ft)	17	97	~231	12	115	~273
Queue Length 95th (ft)	32	140	#339	78	168	#471
Internal Link Dist (ft)		416	439		427	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	519	1664	985	726	1255	746
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.33	0.47	1.05	0.61	0.61	1.08

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 57.8

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 1.08

Timings

14: North Gate Boulevard & Struthers Road

Background Traffic Volumes

Year 2040 - AM Peak Hour

Intersection Signal Delay: 39.8

Intersection LOS: D

Intersection Capacity Utilization 82.1%

ICU Level of Service E

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 14: North Gate Boulevard & Struthers Road

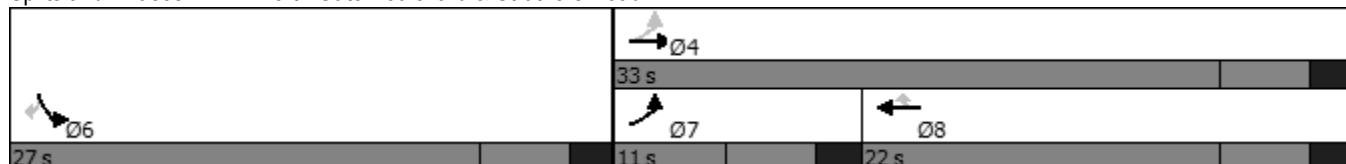

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2040 - PM Peak Hour

	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Group Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	793	1090	121	51	131	666	252	202	434	105	343	300
Future Volume (vph)	793	1090	121	51	131	666	252	202	434	105	343	300
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950			0.950			0.950	
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			177				227			232		
Lane Group Flow (vph)	862	1185	132	0	197	724	274	220	472	114	373	326
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	39.0	58.0	58.0	15.0	15.0	34.0	34.0	15.0	26.0	26.0	21.0	32.0
Total Split (%)	32.5%	48.3%	48.3%	12.5%	12.5%	28.3%	28.3%	12.5%	21.7%	21.7%	17.5%	26.7%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	32.3	51.5	51.5		9.4	28.6	28.6	9.5	19.0	19.0	15.1	24.6
Actuated g/C Ratio	0.27	0.43	0.43		0.08	0.24	0.24	0.08	0.16	0.16	0.13	0.21
v/c Ratio	0.92	0.77	0.17		0.73	0.85	0.50	0.80	0.84	0.25	0.85	0.44
Control Delay	57.7	32.9	1.6		69.8	54.2	11.9	75.5	62.2	1.4	69.6	43.0
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	57.7	32.9	1.6		69.8	54.2	11.9	75.5	62.2	1.4	69.6	43.0
LOS	E	C	A		E	D	B	E	E	A	E	D
Approach Delay		40.8				47.1			57.2			39.3
Approach LOS		D				D			E			D
Queue Length 50th (ft)	331	406	0		78	287	29	88	186	0	147	115
Queue Length 95th (ft)	#444	496	16		#128	#393	109	#152	#259	0	#224	161
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280		140
Base Capacity (vph)	971	1539	788		275	853	553	275	597	460	449	776
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.89	0.77	0.17		0.72	0.85	0.50	0.80	0.79	0.25	0.83	0.42

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 118.5

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.92

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2040 - PM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	520
Future Volume (vph)	520
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	480
Lane Group Flow (vph)	565
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	32.0
Total Split (%)	26.7%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	24.6
Actuated g/C Ratio	0.21
v/c Ratio	0.80
Control Delay	17.1
Queue Delay	0.0
Total Delay	17.1
LOS	B
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	55
Queue Length 95th (ft)	207
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	721
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.78
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Background Traffic Volumes

Year 2040 - PM Peak Hour

Intersection Signal Delay: 44.3

Intersection LOS: D

Intersection Capacity Utilization 82.4%


ICU Level of Service E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

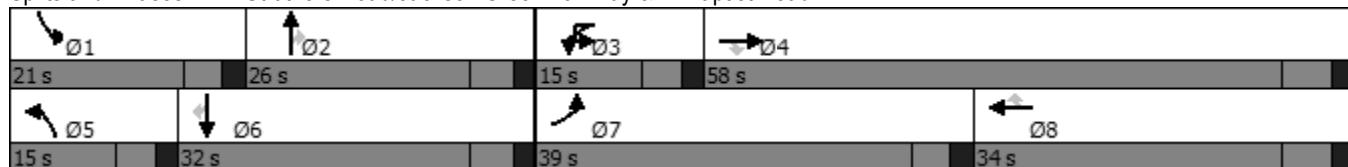

Intersection

Int Delay, s/veh 1.1

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔	↑↓	↔	↑↓		
Traffic Vol, veh/h	23	44	593	26	34	530
Future Vol, veh/h	23	44	593	26	34	530
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	25	48	645	28	37	576

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1021	337	0	0	673
Stage 1	659	-	-	-	-
Stage 2	362	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	232	659	-	-	914
Stage 1	476	-	-	-	-
Stage 2	675	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	223	659	-	-	914
Mov Cap-2 Maneuver	223	-	-	-	-
Stage 1	476	-	-	-	-
Stage 2	648	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	16.2	0	0.5
HCM LOS	C		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	394	914	-
HCM Lane V/C Ratio	-	-	0.185	0.04	-
HCM Control Delay (s)	-	-	16.2	9.1	-
HCM Lane LOS	-	-	C	A	-
HCM 95th %tile Q(veh)	-	-	0.7	0.1	-

HCM 6th TWSC
4: Spanish Bit Drive & Big R Stores Access

Background Traffic Volumes
Year 2040 - PM Peak Hour

Intersection

Int Delay, s/veh 5.1

Movement	SEL	SER	NEL	NET	SWT	SWR
Lane Configurations	W		↑	↑		
Traffic Vol, veh/h	1	44	35	22	20	4
Future Vol, veh/h	1	44	35	22	20	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1	48	38	24	22	4


Major/Minor	Minor2	Major1	Major2			
Conflicting Flow All	124	24	26	0	-	0
Stage 1	24	-	-	-	-	-
Stage 2	100	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	871	1052	1588	-	-	-
Stage 1	999	-	-	-	-	-
Stage 2	924	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	850	1052	1588	-	-	-
Mov Cap-2 Maneuver	850	-	-	-	-	-
Stage 1	975	-	-	-	-	-
Stage 2	924	-	-	-	-	-

Approach	SE	NE	SW
HCM Control Delay, s	8.6	4.5	0
HCM LOS	A		

Minor Lane/Major Mvmt	NEL	NET	SELn1	SWT	SWR
Capacity (veh/h)	1588	-	1046	-	-
HCM Lane V/C Ratio	0.024	-	0.047	-	-
HCM Control Delay (s)	7.3	0	8.6	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0.1	-	0.1	-	-

Timings
14: North Gate Boulevard & Struthers Road

Background Traffic Volumes
Year 2040 - PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	607	864	762	698	555	312
Future Volume (vph)	607	864	762	698	555	312
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.169				0.950	
Satd. Flow (perm)	611	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				689		339
Lane Group Flow (vph)	660	939	828	759	603	339
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	15.0	39.0	24.0	24.0	21.0	21.0
Total Split (%)	25.0%	65.0%	40.0%	40.0%	35.0%	35.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	32.6	32.6	17.6	17.6	15.0	15.0
Actuated g/C Ratio	0.55	0.55	0.30	0.30	0.25	0.25
v/c Ratio	0.87	0.49	0.79	0.80	0.70	0.52
Control Delay	24.9	9.4	26.3	10.8	25.4	5.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	24.9	9.4	26.3	10.8	25.4	5.9
LOS	C	A	C	B	C	A
Approach Delay		15.8	18.9		18.4	
Approach LOS		B	B		B	
Queue Length 50th (ft)	66	98	142	18	102	0
Queue Length 95th (ft)	#153	138	#207	#205	151	54
Internal Link Dist (ft)		426	416		421	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	760	1961	1069	959	864	652
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.87	0.48	0.77	0.79	0.70	0.52

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 59.6

Natural Cycle: 55

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.87

Timings

14: North Gate Boulevard & Struthers Road

Background Traffic Volumes

Year 2040 - PM Peak Hour

Intersection Signal Delay: 17.6

Intersection LOS: B

Intersection Capacity Utilization 70.5%


ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 14: North Gate Boulevard & Struthers Road

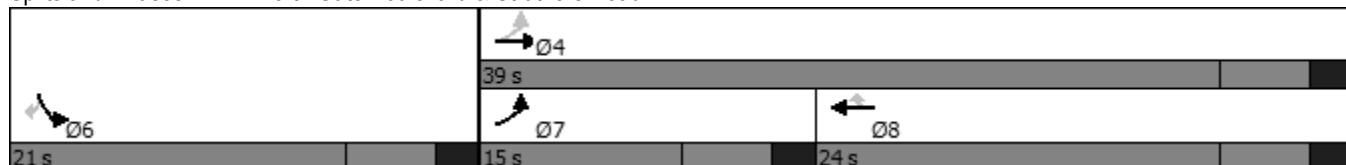

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2023 - AM Peak Hour

	↑	→	↓	↖	↗	↙	↖	↗	↑	↖	↗	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	273	330	93	20	52	451	130	198	178	67	124	99
Future Volume (vph)	273	330	93	20	52	451	130	198	178	67	124	99
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950				0.950			0.950
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			127				177			182		
Lane Group Flow (vph)	297	359	101	0	79	490	141	215	193	73	135	108
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	26.0	48.0	48.0	13.0	13.0	35.0	35.0	19.0	42.0	42.0	17.0	40.0
Total Split (%)	21.7%	40.0%	40.0%	10.8%	10.8%	29.2%	29.2%	15.8%	35.0%	35.0%	14.2%	33.3%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	13.0	42.3	42.3		7.0	33.6	33.6	10.8	11.1	11.1	8.9	9.3
Actuated g/C Ratio	0.14	0.47	0.47		0.08	0.37	0.37	0.12	0.12	0.12	0.10	0.10
v/c Ratio	0.60	0.22	0.12		0.30	0.37	0.20	0.52	0.44	0.21	0.40	0.30
Control Delay	42.5	16.4	2.4		45.0	23.0	2.7	43.5	40.8	1.3	43.4	40.7
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	42.5	16.4	2.4		45.0	23.0	2.7	43.5	40.8	1.3	43.4	40.7
LOS	D	B	A		D	C	A	D	D	A	D	D
Approach Delay		24.8				21.4			36.0			26.0
Approach LOS		C				C			D			C
Queue Length 50th (ft)	84	64	0		22	103	0	61	56	0	38	31
Queue Length 95th (ft)	134	112	20		48	181	25	104	92	0	72	58
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280	140	
Base Capacity (vph)	785	1656	808		287	1315	699	517	1422	745	440	1343
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.38	0.22	0.13		0.28	0.37	0.20	0.42	0.14	0.10	0.31	0.08

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 90.4

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.73

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2023 - AM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	315
Future Volume (vph)	315
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	342
Lane Group Flow (vph)	342
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	40.0
Total Split (%)	33.3%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	9.3
Actuated g/C Ratio	0.10
v/c Ratio	0.73
Control Delay	14.5
Queue Delay	0.0
Total Delay	14.5
LOS	B
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	0
Queue Length 95th (ft)	82
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	813
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.42
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2023 - AM Peak Hour

Intersection Signal Delay: 26.3


Intersection LOS: C

Intersection Capacity Utilization 52.6%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

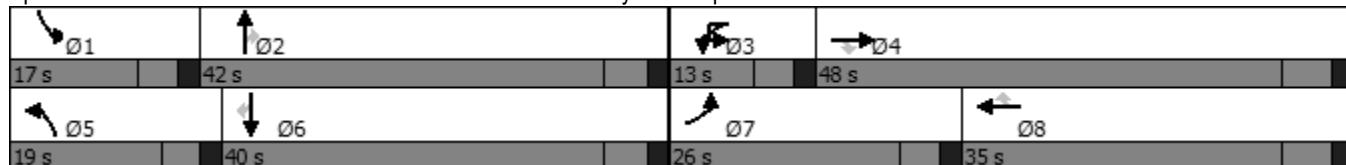

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Total Traffic Volumes
Year 2023 - AM Peak Hour

Intersection

Int Delay, s/veh 2.8

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W	↑↓	W	↑↓		
Traffic Vol, veh/h	54	63	234	43	59	230
Future Vol, veh/h	54	63	234	43	59	230
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	59	68	254	47	64	250

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	531	151	0	0	301
Stage 1	278	-	-	-	-
Stage 2	253	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	478	868	-	-	1257
Stage 1	744	-	-	-	-
Stage 2	766	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	454	868	-	-	1257
Mov Cap-2 Maneuver	454	-	-	-	-
Stage 1	744	-	-	-	-
Stage 2	727	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	12.4	0	1.6
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	611	1257	-
HCM Lane V/C Ratio	-	-	0.208	0.051	-
HCM Control Delay (s)	-	-	12.4	8	-
HCM Lane LOS	-	-	B	A	-
HCM 95th %tile Q(veh)	-	-	0.8	0.2	-

HCM 6th TWSC
3: Spanish Bit Drive & Access A

Total Traffic Volumes
Year 2023 - AM Peak Hour

Intersection

Int Delay, s/veh 1.9

Movement	WBL	WBR	NET	NER	SWL	SWT
Lane Configurations	↔	↑		↔		
Traffic Vol, veh/h	42	0	67	35	0	75
Future Vol, veh/h	42	0	67	35	0	75
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	46	0	73	38	0	82

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	174	92	0	0	111
Stage 1	92	-	-	-	-
Stage 2	82	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	816	965	-	-	1479
Stage 1	932	-	-	-	-
Stage 2	941	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	816	965	-	-	1479
Mov Cap-2 Maneuver	816	-	-	-	-
Stage 1	932	-	-	-	-
Stage 2	941	-	-	-	-

Approach	WB	NE	SW
HCM Control Delay, s	9.7	0	0
HCM LOS	A		

Minor Lane/Major Mvmt	NET	NER	WBLn1	SWL	SWT
Capacity (veh/h)	-	-	816	1479	-
HCM Lane V/C Ratio	-	-	0.056	-	-
HCM Control Delay (s)	-	-	9.7	0	-
HCM Lane LOS	-	-	A	A	-
HCM 95th %tile Q(veh)	-	-	0.2	0	-

HCM 6th TWSC
4: Spanish Bit Drive & Access B/Big R Stores Access

Total Traffic Volumes
Year 2023 - AM Peak Hour

Intersection

Int Delay, s/veh 5.1

Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	0	24	34	0	0	28	12	27	0	17	1
Future Vol, veh/h	0	0	24	34	0	0	28	12	27	0	17	1
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	26	37	0	0	30	13	29	0	18	1

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	107	121	19	120	107	28	19	0	0	42	0	0
Stage 1	19	19	-	88	88	-	-	-	-	-	-	-
Stage 2	88	102	-	32	19	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	872	769	1059	855	783	1047	1597	-	-	1567	-	-
Stage 1	1000	880	-	920	822	-	-	-	-	-	-	-
Stage 2	920	811	-	984	880	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	860	754	1059	822	768	1047	1597	-	-	1567	-	-
Mov Cap-2 Maneuver	860	754	-	822	768	-	-	-	-	-	-	-
Stage 1	981	880	-	903	806	-	-	-	-	-	-	-
Stage 2	903	796	-	960	880	-	-	-	-	-	-	-

Approach	SE	NW			NE			SW			
HCM Control Delay, s	8.5	9.6			3			0			
HCM LOS	A	A			A			A			
<hr/>											
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR		
Capacity (veh/h)	1597	-	-	822	1059	1567	-	-			
HCM Lane V/C Ratio	0.019	-	-	0.045	0.025	-	-	-			
HCM Control Delay (s)	7.3	0	-	9.6	8.5	0	-	-			
HCM Lane LOS	A	A	-	A	A	A	-	-			
HCM 95th %tile Q(veh)	0.1	-	-	0.1	0.1	0	-	-			

HCM 6th TWSC
5: Spanish Bit Drive & Access C

Total Traffic Volumes
Year 2023 - AM Peak Hour

Intersection

Int Delay, s/veh 2.6


Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	0	0	8	0	0	1	4	7	0	10	0
Future Vol, veh/h	0	0	0	8	0	0	1	4	7	0	10	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	9	0	0	1	4	8	0	11	0

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	21	25	11	21	21	8	11	0	0	12	0	0
Stage 1	11	11	-	10	10	-	-	-	-	-	-	-
Stage 2	10	14	-	11	11	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	992	868	1070	992	873	1074	1608	-	-	1607	-	-
Stage 1	1010	886	-	1011	887	-	-	-	-	-	-	-
Stage 2	1011	884	-	1010	886	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	991	867	1070	991	872	1074	1608	-	-	1607	-	-
Mov Cap-2 Maneuver	991	867	-	991	872	-	-	-	-	-	-	-
Stage 1	1009	886	-	1010	886	-	-	-	-	-	-	-
Stage 2	1010	883	-	1010	886	-	-	-	-	-	-	-

Approach	SE	NW			NE			SW		
HCM Control Delay, s	0	8.7			0.6			0		
HCM LOS	A	A			A			A		
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR	
Capacity (veh/h)	1608	-	-	991	-	1607	-	-	-	
HCM Lane V/C Ratio	0.001	-	-	0.009	-	-	-	-	-	
HCM Control Delay (s)	7.2	0	-	8.7	0	0	-	-	-	
HCM Lane LOS	A	A	-	A	A	A	-	-	-	
HCM 95th %tile Q(veh)	0	-	-	0	-	0	-	-	-	

Timings
18: North Gate Boulevard & Struthers Road

Total Traffic Volumes
Year 2023 - AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	130	509	680	310	525	545
Future Volume (vph)	130	509	680	310	525	545
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.187				0.950	
Satd. Flow (perm)	676	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				337		275
Lane Group Flow (vph)	141	553	739	337	571	592
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	11.0	33.6	22.6	22.6	26.4	26.4
Total Split (%)	18.3%	56.0%	37.7%	37.7%	44.0%	44.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	23.7	23.7	15.4	15.4	20.7	20.7
Actuated g/C Ratio	0.42	0.42	0.27	0.27	0.37	0.37
v/c Ratio	0.27	0.37	0.77	0.50	0.45	0.79
Control Delay	10.5	11.7	25.9	5.4	16.3	19.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.5	11.7	25.9	5.4	16.3	19.3
LOS	B	B	C	A	B	B
Approach Delay		11.4	19.5		17.8	
Approach LOS		B	B		B	
Queue Length 50th (ft)	13	63	127	0	82	100
Queue Length 95th (ft)	26	94	184	52	122	#279
Internal Link Dist (ft)		445	433		427	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	530	1753	1055	708	1257	754
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.27	0.32	0.70	0.48	0.45	0.79

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 56.6

Natural Cycle: 55

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.79

Timings

18: North Gate Boulevard & Struthers Road

Total Traffic Volumes

Year 2023 - AM Peak Hour

Intersection Signal Delay: 16.9

Intersection LOS: B

Intersection Capacity Utilization 62.5%


ICU Level of Service B

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 18: North Gate Boulevard & Struthers Road

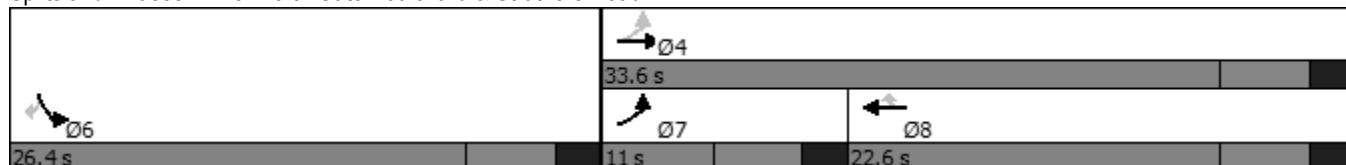

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2023 - PM Peak Hour

	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Group Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	566	714	143	36	99	446	179	209	335	84	255	230
Future Volume (vph)	566	714	143	36	99	446	179	209	335	84	255	230
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950			0.950			0.950	
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			155				195			182		
Lane Group Flow (vph)	615	776	155	0	147	485	195	227	364	91	277	250
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	37.0	52.9	52.9	15.1	15.1	31.0	31.0	17.0	30.7	30.7	21.3	35.0
Total Split (%)	30.8%	44.1%	44.1%	12.6%	12.6%	25.8%	25.8%	14.2%	25.6%	25.6%	17.8%	29.2%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	24.5	46.6	46.6		8.9	31.0	31.0	10.9	16.4	16.4	13.5	19.0
Actuated g/C Ratio	0.22	0.43	0.43		0.08	0.28	0.28	0.10	0.15	0.15	0.12	0.17
v/c Ratio	0.80	0.51	0.20		0.52	0.48	0.33	0.66	0.68	0.23	0.65	0.40
Control Delay	48.5	25.3	4.2		56.2	36.5	6.9	58.3	51.1	1.4	53.8	41.8
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	48.5	25.3	4.2		56.2	36.5	6.9	58.3	51.1	1.4	53.8	41.8
LOS	D	C	A		E	D	A	E	D	A	D	D
Approach Delay		32.4				33.0			46.8			31.4
Approach LOS		C				C			D			C
Queue Length 50th (ft)	212	209	0		52	149	0	80	130	0	96	83
Queue Length 95th (ft)	275	295	41		90	235	61	129	183	0	147	122
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280	140	
Base Capacity (vph)	995	1511	764		303	1007	590	363	804	500	499	944
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.62	0.51	0.20		0.49	0.48	0.33	0.63	0.45	0.18	0.56	0.26

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 109

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.80

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2023 - PM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	371
Future Volume (vph)	371
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	403
Lane Group Flow (vph)	403
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	35.0
Total Split (%)	29.2%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	19.0
Actuated g/C Ratio	0.17
v/c Ratio	0.66
Control Delay	9.6
Queue Delay	0.0
Total Delay	9.6
LOS	A
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	0
Queue Length 95th (ft)	84
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	717
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.56
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2023 - PM Peak Hour

Intersection Signal Delay: 34.8


Intersection LOS: C

Intersection Capacity Utilization 64.6%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

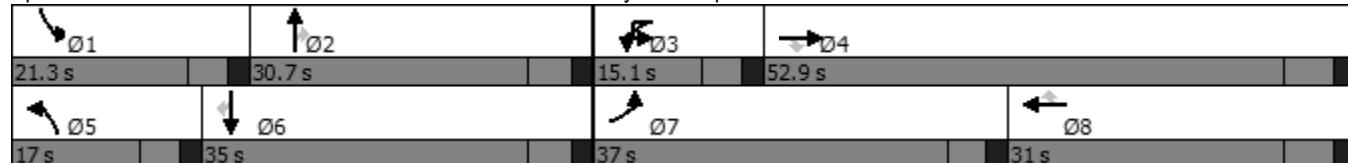

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Total Traffic Volumes
Year 2023 - PM Peak Hour

Intersection						
Int Delay, s/veh	3.9					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W	W	↑↑	↑↑	W	↑↑
Traffic Vol, veh/h	71	96	442	73	91	390
Future Vol, veh/h	71	96	442	73	91	390
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	77	104	480	79	99	424
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	930	280	0	0	559	0
Stage 1	520	-	-	-	-	-
Stage 2	410	-	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14	-
Critical Hdwy Stg 1	5.84	-	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22	-
Pot Cap-1 Maneuver	266	717	-	-	1008	-
Stage 1	561	-	-	-	-	-
Stage 2	638	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	240	717	-	-	1008	-
Mov Cap-2 Maneuver	240	-	-	-	-	-
Stage 1	561	-	-	-	-	-
Stage 2	575	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	22.1	0		1.7		
HCM LOS	C					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT	
Capacity (veh/h)	-	-	389	1008	-	
HCM Lane V/C Ratio	-	-	0.467	0.098	-	
HCM Control Delay (s)	-	-	22.1	9	-	
HCM Lane LOS	-	-	C	A	-	
HCM 95th %tile Q(veh)	-	-	2.4	0.3	-	

HCM 6th TWSC
3: Spanish Bit Drive & Access A

Total Traffic Volumes
Year 2023 - PM Peak Hour

Intersection

Int Delay, s/veh 1.2

Movement	NWL	NWR	NET	NER	SWL	SWT
Lane Configurations	↔	↑		↔		
Traffic Vol, veh/h	37	0	127	37	0	130
Future Vol, veh/h	37	0	127	37	0	130
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	40	0	138	40	0	141

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	299	158	0	0	178
Stage 1	158	-	-	-	-
Stage 2	141	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	692	887	-	-	1398
Stage 1	871	-	-	-	-
Stage 2	886	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	692	887	-	-	1398
Mov Cap-2 Maneuver	692	-	-	-	-
Stage 1	871	-	-	-	-
Stage 2	886	-	-	-	-

Approach	NW	NE	SW
HCM Control Delay, s	10.5	0	0
HCM LOS	B		

Minor Lane/Major Mvmt	NET	NERNWLn1	SWL	SWT
Capacity (veh/h)	-	-	692	1398
HCM Lane V/C Ratio	-	-	0.058	-
HCM Control Delay (s)	-	-	10.5	0
HCM Lane LOS	-	-	B	A
HCM 95th %tile Q(veh)	-	-	0.2	0

HCM 6th TWSC
4: Spanish Bit Drive & Access B/Big R Stores Access

Total Traffic Volumes
Year 2023 - PM Peak Hour

Intersection

Int Delay, s/veh 5.9

Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Lane Configurations

Traffic Vol, veh/h	1	18	27	30	17	0	71	27	29	0	28	3
--------------------	---	----	----	----	----	---	----	----	----	---	----	---

Future Vol, veh/h	1	18	27	30	17	0	71	27	29	0	28	3
-------------------	---	----	----	----	----	---	----	----	----	---	----	---

Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
------------------------	---	---	---	---	---	---	---	---	---	---	---	---

Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
--------------	------	------	------	------	------	------	------	------	------	------	------	------

RT Channelized	-	-	None									
----------------	---	---	------	---	---	------	---	---	------	---	---	------

Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
----------------	---	---	---	---	---	---	---	---	---	---	---	---

Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
--------------------------	---	---	---	---	---	---	---	---	---	---	---	---

Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
----------	---	---	---	---	---	---	---	---	---	---	---	---

Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
------------------	----	----	----	----	----	----	----	----	----	----	----	----

Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
-------------------	---	---	---	---	---	---	---	---	---	---	---	---

Mvmt Flow	1	20	29	33	18	0	77	29	32	0	30	3
-----------	---	----	----	----	----	---	----	----	----	---	----	---

Major/Minor	Minor2	Minor1			Major1			Major2		
-------------	--------	--------	--	--	--------	--	--	--------	--	--

Conflicting Flow All	240	247	32	255	232	45	33	0	0	61	0	0
----------------------	-----	-----	----	-----	-----	----	----	---	---	----	---	---

Stage 1	32	32	-	199	199	-	-	-	-	-	-	-
---------	----	----	---	-----	-----	---	---	---	---	---	---	---

Stage 2	208	215	-	56	33	-	-	-	-	-	-	-
---------	-----	-----	---	----	----	---	---	---	---	---	---	---

Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
---------------	------	------	------	------	------	------	------	---	---	------	---	---

Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
---------------------	------	------	---	------	------	---	---	---	---	---	---	---

Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
---------------------	------	------	---	------	------	---	---	---	---	---	---	---

Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
----------------	-------	-------	-------	-------	-------	-------	-------	---	---	-------	---	---

Pot Cap-1 Maneuver	714	655	1042	698	668	1025	1579	-	-	1542	-	-
--------------------	-----	-----	------	-----	-----	------	------	---	---	------	---	---

Stage 1	984	868	-	803	736	-	-	-	-	-	-	-
---------	-----	-----	---	-----	-----	---	---	---	---	---	---	---

Stage 2	794	725	-	956	868	-	-	-	-	-	-	-
---------	-----	-----	---	-----	-----	---	---	---	---	---	---	---

Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
--------------------	---	---	---	---	---	---	---	---	---	---	---	---

Mov Cap-1 Maneuver	671	622	1042	637	634	1025	1579	-	-	1542	-	-
--------------------	-----	-----	------	-----	-----	------	------	---	---	------	---	---

Mov Cap-2 Maneuver	671	622	-	637	634	-	-	-	-	-	-	-
--------------------	-----	-----	---	-----	-----	---	---	---	---	---	---	---

Stage 1	934	868	-	762	698	-	-	-	-	-	-	-
---------	-----	-----	---	-----	-----	---	---	---	---	---	---	---

Stage 2	734	688	-	908	868	-	-	-	-	-	-	-
---------	-----	-----	---	-----	-----	---	---	---	---	---	---	---

Approach	SE	NW			NE			SW		
----------	----	----	--	--	----	--	--	----	--	--

HCM Control Delay, s	9.7	11.2			4.1			0		
----------------------	-----	------	--	--	-----	--	--	---	--	--

HCM LOS	A	B								
---------	---	---	--	--	--	--	--	--	--	--

Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR
-----------------------	-----	-----	-----	-----	---------	-----	-----	-----	-----

Capacity (veh/h)	1579	-	-	636	816	1542	-	-	-
------------------	------	---	---	-----	-----	------	---	---	---

HCM Lane V/C Ratio	0.049	-	-	0.08	0.061	-	-	-	-
--------------------	-------	---	---	------	-------	---	---	---	---

HCM Control Delay (s)	7.4	0	-	11.2	9.7	0	-	-	-
-----------------------	-----	---	---	------	-----	---	---	---	---

HCM Lane LOS	A	A	-	B	A	A	-	-	-
--------------	---	---	---	---	---	---	---	---	---

HCM 95th %tile Q(veh)	0.2	-	-	0.3	0.2	0	-	-	-
-----------------------	-----	---	---	-----	-----	---	---	---	---

HCM 6th TWSC
5: Spanish Bit Drive & Access C

Total Traffic Volumes
Year 2023 - PM Peak Hour

Intersection

Int Delay, s/veh 1.7


Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	0	2	8	0	0	2	19	7	0	21	0
Future Vol, veh/h	0	0	2	8	0	0	2	19	7	0	21	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	2	9	0	0	2	21	8	0	23	0

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	52	56	23	53	52	25	23	0	0	29	0	0
Stage 1	23	23	-	29	29	-	-	-	-	-	-	-
Stage 2	29	33	-	24	23	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	947	835	1054	946	839	1051	1592	-	-	1584	-	-
Stage 1	995	876	-	988	871	-	-	-	-	-	-	-
Stage 2	988	868	-	994	876	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	946	834	1054	943	838	1051	1592	-	-	1584	-	-
Mov Cap-2 Maneuver	946	834	-	943	838	-	-	-	-	-	-	-
Stage 1	994	876	-	987	870	-	-	-	-	-	-	-
Stage 2	987	867	-	992	876	-	-	-	-	-	-	-

Approach	SE	NW			NE			SW			
HCM Control Delay, s	8.4	8.9			0.5			0			
HCM LOS	A	A			A			A			
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR		
Capacity (veh/h)	1592	-	-	943	1054	1584	-	-			
HCM Lane V/C Ratio	0.001	-	-	0.009	0.002	-	-	-			
HCM Control Delay (s)	7.3	0	-	8.9	8.4	0	-	-			
HCM Lane LOS	A	A	-	A	A	A	-	-			
HCM 95th %tile Q(veh)	0	-	-	0	0	0	-	-			

Timings
18: North Gate Boulevard & Struthers Road

Total Traffic Volumes
Year 2023 - PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	458	617	544	455	426	247
Future Volume (vph)	458	617	544	455	426	247
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.258				0.950	
Satd. Flow (perm)	932	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				495		268
Lane Group Flow (vph)	498	671	591	495	463	268
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	14.0	39.0	25.0	25.0	21.0	21.0
Total Split (%)	23.3%	65.0%	41.7%	41.7%	35.0%	35.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	29.5	29.5	15.4	15.4	15.1	15.1
Actuated g/C Ratio	0.52	0.52	0.27	0.27	0.27	0.27
v/c Ratio	0.59	0.36	0.61	0.63	0.51	0.43
Control Delay	10.6	8.5	20.8	5.9	20.6	5.5
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.6	8.5	20.8	5.9	20.6	5.5
LOS	B	A	C	A	C	A
Approach Delay		9.4	14.0		15.1	
Approach LOS		A	B		B	
Queue Length 50th (ft)	43	63	91	0	69	0
Queue Length 95th (ft)	66	93	134	57	114	49
Internal Link Dist (ft)		404	435		421	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	840	2071	1192	861	913	617
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.59	0.32	0.50	0.57	0.51	0.43

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 56.6

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.63

Timings

18: North Gate Boulevard & Struthers Road

Total Traffic Volumes

Year 2023 - PM Peak Hour

Intersection Signal Delay: 12.5


Intersection LOS: B

Intersection Capacity Utilization 55.3%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 18: North Gate Boulevard & Struthers Road

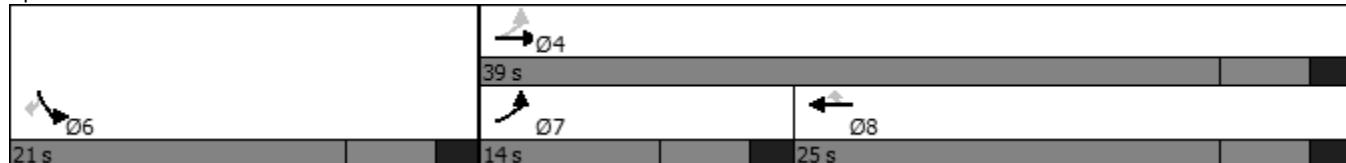

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2040 - AM Peak Hour

	↑	→	↓	↖	↗	↙	↖	↗	↑	↖	↗	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑
Traffic Volume (vph)	382	506	113	28	73	781	183	234	233	86	163	132
Future Volume (vph)	382	506	113	28	73	781	183	234	233	86	163	132
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Flt Permitted	0.950				0.950			0.950			0.950	
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539
Satd. Flow (RTOR)			127				199			182		
Lane Group Flow (vph)	415	550	123	0	109	849	199	254	253	93	177	143
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA
Protected Phases	7	4		3	3	8		5	2		1	6
Permitted Phases			4				8			2		
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0
Total Split (s)	24.0	51.5	51.5	13.5	13.5	41.0	41.0	16.0	38.3	38.3	16.7	39.0
Total Split (%)	20.0%	42.9%	42.9%	11.3%	11.3%	34.2%	34.2%	13.3%	31.9%	31.9%	13.9%	32.5%
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag
Lead-Lag Optimize?	Yes											
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None
Act Effct Green (s)	16.8	45.3	45.3		7.6	36.1	36.1	10.5	22.9	22.9	10.1	22.5
Actuated g/C Ratio	0.15	0.41	0.41		0.07	0.33	0.33	0.10	0.21	0.21	0.09	0.21
v/c Ratio	0.79	0.38	0.17		0.46	0.73	0.30	0.78	0.34	0.20	0.56	0.20
Control Delay	57.2	24.7	4.6		57.6	38.7	5.8	66.8	37.7	0.9	56.4	35.6
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	57.2	24.7	4.6		57.6	38.7	5.8	66.8	37.7	0.9	56.4	35.6
LOS	E	C	A		E	D	A	E	D	A	E	D
Approach Delay		34.8				34.8			44.3			42.8
Approach LOS		C				C			D			D
Queue Length 50th (ft)	145	141	0		38	285	0	92	81	0	62	44
Queue Length 95th (ft)	#227	214	37		73	405	55	#172	118	0	106	71
Internal Link Dist (ft)		668				783			3774			650
Turn Bay Length (ft)	430		190		265		535	430		280	140	
Base Capacity (vph)	583	1463	728		252	1166	655	331	1050	597	353	1073
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.71	0.38	0.17		0.43	0.73	0.30	0.77	0.24	0.16	0.50	0.13

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 109.6

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.90

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2040 - AM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	441
Future Volume (vph)	441
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	260
Lane Group Flow (vph)	479
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	39.0
Total Split (%)	32.5%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	22.5
Actuated g/C Ratio	0.21
v/c Ratio	0.90
Control Delay	40.0
Queue Delay	0.0
Total Delay	40.0
LOS	D
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	161
Queue Length 95th (ft)	300
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	661
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.72
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2040 - AM Peak Hour

Intersection Signal Delay: 38.1

Intersection LOS: D

Intersection Capacity Utilization 70.6%


ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

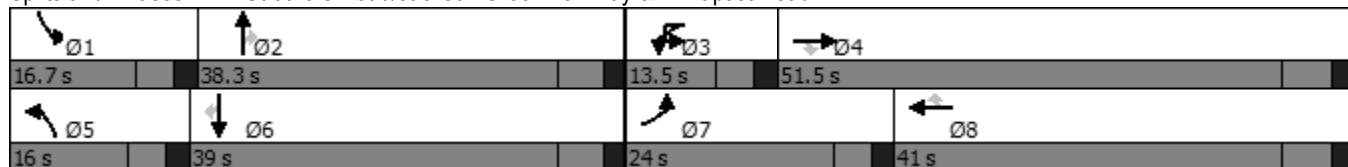

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Total Traffic Volumes
Year 2040 - AM Peak Hour

Intersection

Int Delay, s/veh 2.8

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W	↑↓	W	↑↓		
Traffic Vol, veh/h	59	68	314	45	64	292
Future Vol, veh/h	59	68	314	45	64	292
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	64	74	341	49	70	317

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	665	195	0	0	390
Stage 1	366	-	-	-	-
Stage 2	299	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	393	814	-	-	1165
Stage 1	672	-	-	-	-
Stage 2	726	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	369	814	-	-	1165
Mov Cap-2 Maneuver	369	-	-	-	-
Stage 1	672	-	-	-	-
Stage 2	682	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	14.4	0	1.5
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	522	1165	-
HCM Lane V/C Ratio	-	-	0.264	0.06	-
HCM Control Delay (s)	-	-	14.4	8.3	-
HCM Lane LOS	-	-	B	A	-
HCM 95th %tile Q(veh)	-	-	1.1	0.2	-

HCM 6th TWSC
3: Spanish Bit Drive & Access A

Total Traffic Volumes
Year 2040 - AM Peak Hour

Intersection

Int Delay, s/veh 1.7

Movement	NWL	NWR	NET	NER	SWL	SWT
Lane Configurations	W	W	W	W	W	W
Traffic Vol, veh/h	42	0	74	35	0	85
Future Vol, veh/h	42	0	74	35	0	85
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	46	0	80	38	0	92

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	191	99	0	0	118
Stage 1	99	-	-	-	-
Stage 2	92	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	798	957	-	-	1470
Stage 1	925	-	-	-	-
Stage 2	932	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	798	957	-	-	1470
Mov Cap-2 Maneuver	798	-	-	-	-
Stage 1	925	-	-	-	-
Stage 2	932	-	-	-	-

Approach	NW	NE	SW
HCM Control Delay, s	9.8	0	0
HCM LOS	A		

Minor Lane/Major Mvmt	NET	NER	NWL	Ln1	SWL	SWT
Capacity (veh/h)	-	-	798	1470	-	-
HCM Lane V/C Ratio	-	-	0.057	-	-	-
HCM Control Delay (s)	-	-	9.8	0	-	-
HCM Lane LOS	-	-	A	A	-	-
HCM 95th %tile Q(veh)	-	-	0.2	0	-	-

HCM 6th TWSC
4: Spanish Bit Drive & Access B/Big R Stores Access

Total Traffic Volumes
Year 2040 - AM Peak Hour

Intersection

Int Delay, s/veh 5.1

Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	0	29	34	0	0	33	14	27	0	22	1
Future Vol, veh/h	0	0	29	34	0	0	33	14	27	0	22	1
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	32	37	0	0	36	15	29	0	24	1

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	127	141	25	143	127	30	25	0	0	44	0	0
Stage 1	25	25	-	102	102	-	-	-	-	-	-	-
Stage 2	102	116	-	41	25	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	846	750	1051	826	764	1044	1589	-	-	1564	-	-
Stage 1	993	874	-	904	811	-	-	-	-	-	-	-
Stage 2	904	800	-	974	874	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	831	733	1051	787	746	1044	1589	-	-	1564	-	-
Mov Cap-2 Maneuver	831	733	-	787	746	-	-	-	-	-	-	-
Stage 1	970	874	-	883	792	-	-	-	-	-	-	-
Stage 2	883	782	-	945	874	-	-	-	-	-	-	-

Approach	SE	NW			NE			SW			
HCM Control Delay, s	8.5	9.8			3.3			0			
HCM LOS	A	A			A			A			
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR		
Capacity (veh/h)	1589	-	-	787	1051	1564	-	-			
HCM Lane V/C Ratio	0.023	-	-	0.047	0.03	-	-	-			
HCM Control Delay (s)	7.3	0	-	9.8	8.5	0	-	-			
HCM Lane LOS	A	A	-	A	A	A	-	-			
HCM 95th %tile Q(veh)	0.1	-	-	0.1	0.1	0	-	-			

HCM 6th TWSC
5: Spanish Bit Drive & Access C

Total Traffic Volumes
Year 2040 - AM Peak Hour

Intersection

Int Delay, s/veh 2.1


Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	0	0	8	0	0	1	6	7	0	15	0
Future Vol, veh/h	0	0	0	8	0	0	1	6	7	0	15	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	9	0	0	1	7	8	0	16	0

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	29	33	16	29	29	11	16	0	0	15	0	0
Stage 1	16	16	-	13	13	-	-	-	-	-	-	-
Stage 2	13	17	-	16	16	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	980	860	1063	980	864	1070	1602	-	-	1603	-	-
Stage 1	1004	882	-	1007	885	-	-	-	-	-	-	-
Stage 2	1007	881	-	1004	882	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	979	859	1063	979	863	1070	1602	-	-	1603	-	-
Mov Cap-2 Maneuver	979	859	-	979	863	-	-	-	-	-	-	-
Stage 1	1003	882	-	1006	884	-	-	-	-	-	-	-
Stage 2	1006	880	-	1004	882	-	-	-	-	-	-	-

Approach	SE	NW			NE			SW			
HCM Control Delay, s	0	8.7			0.5			0			
HCM LOS	A	A			A			A			
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR		
Capacity (veh/h)	1602	-	-	979	-	1603	-	-	-		
HCM Lane V/C Ratio	0.001	-	-	0.009	-	-	-	-	-		
HCM Control Delay (s)	7.2	0	-	8.7	0	0	-	-	-		
HCM Lane LOS	A	A	-	A	A	A	-	-	-		
HCM 95th %tile Q(veh)	0	-	-	0	-	0	-	-	-		

Timings
18: North Gate Boulevard & Struthers Road

Total Traffic Volumes
Year 2040 - AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	175	712	953	426	726	757
Future Volume (vph)	175	712	953	426	726	757
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.182				0.950	
Satd. Flow (perm)	658	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				417		264
Lane Group Flow (vph)	190	774	1036	463	789	823
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	11.0	33.0	22.0	22.0	27.0	27.0
Total Split (%)	18.3%	55.0%	36.7%	36.7%	45.0%	45.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	27.0	27.0	16.0	16.0	21.0	21.0
Actuated g/C Ratio	0.45	0.45	0.27	0.27	0.35	0.35
v/c Ratio	0.36	0.49	1.10	0.64	0.66	1.14
Control Delay	11.7	12.9	84.7	8.0	19.6	94.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.7	12.9	84.7	8.0	19.6	94.7
LOS	B	B	F	A	B	F
Approach Delay		12.7	61.0		58.0	
Approach LOS		B	E		E	
Queue Length 50th (ft)	19	97	~231	13	121	~289
Queue Length 95th (ft)	35	140	#339	82	174	#489
Internal Link Dist (ft)		431	421		424	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	527	1592	943	727	1201	725
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.36	0.49	1.10	0.64	0.66	1.14

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 60

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 1.14

Timings

18: North Gate Boulevard & Struthers Road

Total Traffic Volumes

Year 2040 - AM Peak Hour

Intersection Signal Delay: 48.4

Intersection LOS: D

Intersection Capacity Utilization 83.2%

ICU Level of Service E

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 18: North Gate Boulevard & Struthers Road

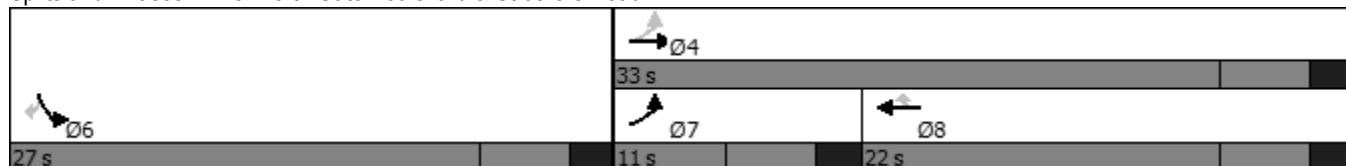

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2040 - PM Peak Hour

	↑	→	↓	↖	↗	↙	↖	↗	↙	↑	→	↓	↖	↗	↙	↓
Lane Group	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT				
Lane Configurations	↑↑	↑↑	↑↑		↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑	↑↑				
Traffic Volume (vph)	793	1090	170	51	137	666	252	250	446	110	343	312				
Future Volume (vph)	793	1090	170	51	137	666	252	250	446	110	343	312				
Satd. Flow (prot)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539				
Flt Permitted	0.950				0.950				0.950			0.950				
Satd. Flow (perm)	3433	3539	1583	0	3433	3539	1583	3433	3539	1583	3433	3539				
Satd. Flow (RTOR)			177					227				232				
Lane Group Flow (vph)	862	1185	185	0	204	724	274	272	485	120	373	339				
Turn Type	Prot	NA	Perm	Prot	Prot	NA	Perm	Prot	NA	Perm	Prot	NA				
Protected Phases	7	4			3	3	8		5	2		1	6			
Permitted Phases			4				8			2						
Detector Phase	7	4	4	3	3	8	8	5	2	2	1	6				
Switch Phase																
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0				
Minimum Split (s)	10.5	11.5	11.5	10.5	10.5	11.5	11.5	10.5	11.0	11.0	10.5	11.0				
Total Split (s)	39.0	58.0	58.0	15.0	15.0	34.0	34.0	15.0	26.0	26.0	21.0	32.0				
Total Split (%)	32.5%	48.3%	48.3%	12.5%	12.5%	28.3%	28.3%	12.5%	21.7%	21.7%	17.5%	26.7%				
Yellow Time (s)	3.5	4.5	4.5	3.5	3.5	4.5	4.5	3.5	4.0	4.0	3.5	4.0				
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0				
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Total Lost Time (s)	5.5	6.5	6.5		5.5	6.5	6.5	5.5	6.0	6.0	5.5	6.0				
Lead/Lag	Lead	Lag	Lag	Lead	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag				
Lead-Lag Optimize?	Yes															
Recall Mode	None	Max	Max	None	None	Max	Max	None	None	None	None	None				
Act Effct Green (s)	32.4	51.5	51.5		9.4	28.6	28.6	9.5	19.2	19.2	15.2	24.8				
Actuated g/C Ratio	0.27	0.43	0.43		0.08	0.24	0.24	0.08	0.16	0.16	0.13	0.21				
v/c Ratio	0.92	0.77	0.24		0.75	0.85	0.50	0.99	0.85	0.27	0.85	0.46				
Control Delay	58.0	33.1	4.3		71.5	54.5	11.9	107.6	63.3	1.4	69.8	43.3				
Queue Delay	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
Total Delay	58.0	33.1	4.3		71.5	54.5	11.9	107.6	63.3	1.4	69.8	43.3				
LOS	E	C	A		E	D	B	F	E	A	E	D				
Approach Delay		40.3				47.7			68.6			39.6				
Approach LOS		D				D			E			D				
Queue Length 50th (ft)	331	406	3		80	287	29	~110	193	0	147	120				
Queue Length 95th (ft)	#444	496	46		#136	#393	109	#202	#271	0	#224	167				
Internal Link Dist (ft)		668				783			3774			650				
Turn Bay Length (ft)	430		190		265		535	430		280		140				
Base Capacity (vph)	968	1534	786		274	851	553	274	595	459	448	774				
Starvation Cap Reductn	0	0	0		0	0	0	0	0	0	0	0				
Spillback Cap Reductn	0	0	0		0	0	0	0	0	0	0	0				
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0				
Reduced v/c Ratio	0.89	0.77	0.24		0.74	0.85	0.50	0.99	0.82	0.26	0.83	0.44				

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 118.8

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.99

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2040 - PM Peak Hour

Lane Group	SBR
Lane Configurations	1
Traffic Volume (vph)	520
Future Volume (vph)	520
Satd. Flow (prot)	1583
Flt Permitted	
Satd. Flow (perm)	1583
Satd. Flow (RTOR)	477
Lane Group Flow (vph)	565
Turn Type	Perm
Protected Phases	
Permitted Phases	6
Detector Phase	6
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	11.0
Total Split (s)	32.0
Total Split (%)	26.7%
Yellow Time (s)	4.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	0.0
Total Lost Time (s)	6.0
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Recall Mode	None
Act Effct Green (s)	24.8
Actuated g/C Ratio	0.21
v/c Ratio	0.80
Control Delay	17.3
Queue Delay	0.0
Total Delay	17.3
LOS	B
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	57
Queue Length 95th (ft)	210
Internal Link Dist (ft)	
Turn Bay Length (ft)	160
Base Capacity (vph)	719
Starvation Cap Reductn	0
Spillback Cap Reductn	0
Storage Cap Reductn	0
Reduced v/c Ratio	0.79
Intersection Summary	

Timings

1: Struthers Road/Jackson Creek Parkway & W Baptist Road

Total Traffic Volumes

Year 2040 - PM Peak Hour

Intersection Signal Delay: 46.2

Intersection LOS: D

Intersection Capacity Utilization 82.7%

ICU Level of Service E

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: Struthers Road/Jackson Creek Parkway & W Baptist Road

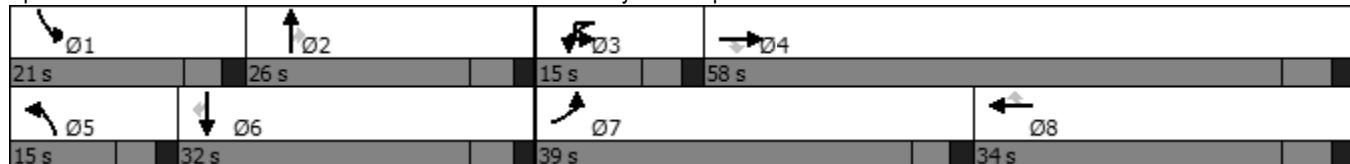

HCM 6th TWSC
2: Struthers Road & Spanish Bit Drive

Total Traffic Volumes
Year 2040 - PM Peak Hour

Intersection

Int Delay, s/veh 6.4

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		↑↓		W	↑↑
Traffic Vol, veh/h	77	109	593	80	101	530
Future Vol, veh/h	77	109	593	80	101	530
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	84	118	645	87	110	576

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1197	366	0	0	732
Stage 1	689	-	-	-	-
Stage 2	508	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14
Critical Hdwy Stg 1	5.84	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22
Pot Cap-1 Maneuver	179	631	-	-	868
Stage 1	460	-	-	-	-
Stage 2	569	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	156	631	-	-	868
Mov Cap-2 Maneuver	156	-	-	-	-
Stage 1	460	-	-	-	-
Stage 2	497	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	45.6	0	1.6
HCM LOS	E		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT
Capacity (veh/h)	-	-	279	868	-
HCM Lane V/C Ratio	-	-	0.725	0.126	-
HCM Control Delay (s)	-	-	45.6	9.7	-
HCM Lane LOS	-	-	E	A	-
HCM 95th %tile Q(veh)	-	-	5.1	0.4	-

HCM 6th TWSC
3: Spanish Bit Drive & Access A

Total Traffic Volumes
Year 2040 - PM Peak Hour

Intersection

Int Delay, s/veh 1.1

Movement	NWL	NWR	NET	NER	SWL	SWT
Lane Configurations	↔	↑		↔		
Traffic Vol, veh/h	37	0	144	37	0	149
Future Vol, veh/h	37	0	144	37	0	149
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	40	0	157	40	0	162

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	339	177	0	0	197
Stage 1	177	-	-	-	-
Stage 2	162	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	657	866	-	-	1376
Stage 1	854	-	-	-	-
Stage 2	867	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	657	866	-	-	1376
Mov Cap-2 Maneuver	657	-	-	-	-
Stage 1	854	-	-	-	-
Stage 2	867	-	-	-	-

Approach	NW	NE	SW
HCM Control Delay, s	10.8	0	0
HCM LOS	B		

Minor Lane/Major Mvmt	NET	NER	NWL	Ln1	SWL	SWT
Capacity (veh/h)	-	-	657	1376	-	-
HCM Lane V/C Ratio	-	-	0.061	-	-	-
HCM Control Delay (s)	-	-	10.8	0	-	-
HCM Lane LOS	-	-	B	A	-	-
HCM 95th %tile Q(veh)	-	-	0.2	0	-	-

HCM 6th TWSC
4: Spanish Bit Drive & Access B/Big R Stores Access

Total Traffic Volumes
Year 2040 - PM Peak Hour

Intersection

Int Delay, s/veh 6.5

Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	1	18	85	30	17	0	81	34	29	0	34	4
Future Vol, veh/h	1	18	85	30	17	0	81	34	29	0	34	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	1	20	92	33	18	0	88	37	32	0	37	4

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	277	284	39	324	270	53	41	0	0	69	0	0
Stage 1	39	39	-	229	229	-	-	-	-	-	-	-
Stage 2	238	245	-	95	41	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	675	625	1033	629	636	1014	1568	-	-	1532	-	-
Stage 1	976	862	-	774	715	-	-	-	-	-	-	-
Stage 2	765	703	-	912	861	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	630	588	1033	533	598	1014	1568	-	-	1532	-	-
Mov Cap-2 Maneuver	630	588	-	533	598	-	-	-	-	-	-	-
Stage 1	918	862	-	728	673	-	-	-	-	-	-	-
Stage 2	700	662	-	812	861	-	-	-	-	-	-	-

Approach	SE	NW			NE			SW			
HCM Control Delay, s	9.5	12.1			4.2			0			
HCM LOS	A	B									
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SEL	Ln1	SWL	SWT	SWR		
Capacity (veh/h)	1568	-	-	555	908	1532	-	-			
HCM Lane V/C Ratio	0.056	-	-	0.092	0.124	-	-	-			
HCM Control Delay (s)	7.4	0	-	12.1	9.5	0	-	-			
HCM Lane LOS	A	A	-	B	A	A	-	-			
HCM 95th %tile Q(veh)	0.2	-	-	0.3	0.4	0	-	-			

HCM 6th TWSC
5: Spanish Bit Drive & Access C

Total Traffic Volumes
Year 2040 - PM Peak Hour

Intersection

Int Delay, s/veh 1.4


Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	0	2	8	0	0	2	24	7	0	28	0
Future Vol, veh/h	0	0	2	8	0	0	2	24	7	0	28	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	2	9	0	0	2	26	8	0	30	0

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	64	68	30	65	64	30	30	0	0	34	0	0
Stage 1	30	30	-	34	34	-	-	-	-	-	-	-
Stage 2	34	38	-	31	30	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	930	823	1044	929	827	1044	1583	-	-	1578	-	-
Stage 1	987	870	-	982	867	-	-	-	-	-	-	-
Stage 2	982	863	-	986	870	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	929	822	1044	926	826	1044	1583	-	-	1578	-	-
Mov Cap-2 Maneuver	929	822	-	926	826	-	-	-	-	-	-	-
Stage 1	986	870	-	981	866	-	-	-	-	-	-	-
Stage 2	981	862	-	984	870	-	-	-	-	-	-	-

Approach	SE	NW			NE		SW	
HCM Control Delay, s	8.5		8.9		0.4		0	
HCM LOS	A		A		A		A	
<hr/>								
Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1 SELn1	SWL	SWT	SWR
Capacity (veh/h)	1583	-	-	926	1044	1578	-	-
HCM Lane V/C Ratio	0.001	-	-	0.009	0.002	-	-	-
HCM Control Delay (s)	7.3	0	-	8.9	8.5	0	-	-
HCM Lane LOS	A	A	-	A	A	A	-	-
HCM 95th %tile Q(veh)	0	-	-	0	0	0	-	-

Timings
18: North Gate Boulevard & Struthers Road

Total Traffic Volumes
Year 2040 - PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑↑	↑↑	↑↑	↑	↑↑	↑
Traffic Volume (vph)	631	864	762	728	585	336
Future Volume (vph)	631	864	762	728	585	336
Satd. Flow (prot)	3433	3539	3539	1583	3433	1583
Flt Permitted	0.169				0.950	
Satd. Flow (perm)	611	3539	3539	1583	3433	1583
Satd. Flow (RTOR)				688		365
Lane Group Flow (vph)	686	939	828	791	636	365
Turn Type	pm+pt	NA	NA	Perm	Prot	Perm
Protected Phases	7	4	8		6	
Permitted Phases	4			8		6
Detector Phase	7	4	8	8	6	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	11.0	11.0	11.0	11.0	11.0
Total Split (s)	15.0	39.0	24.0	24.0	21.0	21.0
Total Split (%)	25.0%	65.0%	40.0%	40.0%	35.0%	35.0%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	None	None	None	Max	Max
Act Effct Green (s)	32.6	32.6	17.6	17.6	15.0	15.0
Actuated g/C Ratio	0.55	0.55	0.30	0.30	0.25	0.25
v/c Ratio	0.90	0.49	0.79	0.83	0.74	0.54
Control Delay	29.1	9.4	26.3	13.1	26.8	6.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	29.1	9.4	26.3	13.1	26.8	6.0
LOS	C	A	C	B	C	A
Approach Delay		17.7	19.8		19.2	
Approach LOS		B	B		B	
Queue Length 50th (ft)	72	98	142	28	108	0
Queue Length 95th (ft)	#165	138	#207	#234	#161	56
Internal Link Dist (ft)		433	445		427	
Turn Bay Length (ft)	180			125	265	
Base Capacity (vph)	760	1961	1069	958	864	671
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.90	0.48	0.77	0.83	0.74	0.54

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 59.6

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.90

Timings

18: North Gate Boulevard & Struthers Road

Total Traffic Volumes

Year 2040 - PM Peak Hour

Intersection Signal Delay: 18.9

Intersection LOS: B

Intersection Capacity Utilization 73.1%

ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 18: North Gate Boulevard & Struthers Road

