



NON-JURISDICTIONAL WATER IMPOUNDMENT STRUCTURE¹

This notice is required per Section 37-87-125, C.R.S. (1998) and must be submitted to the Division Engineer's Office a minimum of 45 days prior to construction.

OWNER INFORMATION

Name: Atticus Land LLC Telephone/E-Mail: (206)419-4533 / decotoj@gmail.com
Address: 0 Walker Road Colorado Springs Colorado 80908
Street / P.O. Box/ Rural Route City State Zip Code
Responsible Person: Ryan Burns Telephone/E-Mail: (203)577-8656 / rburns@allterraineng.com
Address: 1004 W Van Buren St Colorado Springs Colorado
Street / P.O. Box/ Rural Route City State Zip Code
Contractor: TBD Telephone/E-Mail: () TBD / TBD

STRUCTURE INFORMATION

Name of Dam: Iron Ridge Filing No. 2 - Pond 2 Water Division: N/A Water District: N/A

Location: (Provide Section, Township, Range, **and** GPS Point taken at crest of dam above streamline/outlet)

- Section: 13, Township: 11, Range: South, 66 P.M.

- Northing 39° 5'20.98"N meters, Easting 104°43'19.55"W meters (Datum should be UTM, NAD 83)

Dam Dimensions:

- Vertical Height²: 4.0 ft., Length: 150 ft., Crest Width: 10 ft., Slopes: U/S: 25%(H:1V), D/S 4:1 (H:1V)

Reservoir:

- Surface Area¹: 0.2 acres, Capacity¹: 0.6 acre-feet, Drainage Area*: 10 acres

*(If drainage area is unknown leave blank and a spillway size will be assigned):

Emergency Spillway: (See Table 1, Spillway Sizing Guidelines)

- Bottom Width: 16 ft., Side Slopes: 4:1 H:1V, Freeboard³: 1.1 ft

Outlet Conduit Type: RCP or CMP, Size: 24 inches, Location: NW

Stream Name or Water Source⁴: n/a Proposed Water Use: n/a

Water Court Case or WDID : n/a
(Water District Identification Number)

9/10/2026

Signature of Owner

Date

Office Use Only

DIVISION ENGINEER'S REQUIREMENTS:

Dam I.D.

Signature of Division Engineer

Date

¹ A "Non-Jurisdictional Structure" is a dam creating a reservoir with a capacity of 100 acre-feet or less and a surface area of 20 acres or less and a vertical height (footnote 2) of 10 feet or less. Non-jurisdictional size dams are regulated and subject to the authority of the State Engineer consistent with sections 37-87-102 and 37-87-105 C.R.S.

² "Vertical Height" is measured from the elevation of the lowest point of the natural surface of the ground or the invert of the outlet conduit (whichever is lower) where that point occurs along the longitudinal centerline of the dam up to the crest of the emergency spillway of the dam.

³ "Freeboard" is the vertical distance from the bottom of spillway to the crest of the dam. Minimum Freeboard is 3 feet.

⁴ If construction in reservoir intercepts groundwater, a well permit is required. (Well permit applications can be found at dwr.colorado.gov)




Table 1 DAM SAFETY BRANCH Spillway Sizing Guidelines for Non-Jurisdictional Dams

Drainage Area (Acres)	Minimum Recommended Bottom Width ¹ (Feet) Low Intensity Rainfall Zone	Minimum Recommended Bottom Width ¹ (Feet) High Intensity Rainfall Zone
175	8	8
225	8	10
275	8	12
325	8	15
375	10	17
425	11	19
475	12	21
525	13	24
575	15	26
625	16	28
675	17	30
725	19	33
775	20	35
825	21	37
875	22	39
925	24	42
975	25	44
1025	26	46
1075	28	48
1125	29	51
1175	30	53
1225	31	55
1275	33	57
1325	34	59
1375	35	62
1425	37	64
1475	38	66

¹Minimum recommended bottom width for drainage areas less than 175 acres is 8 feet



Spillway Section

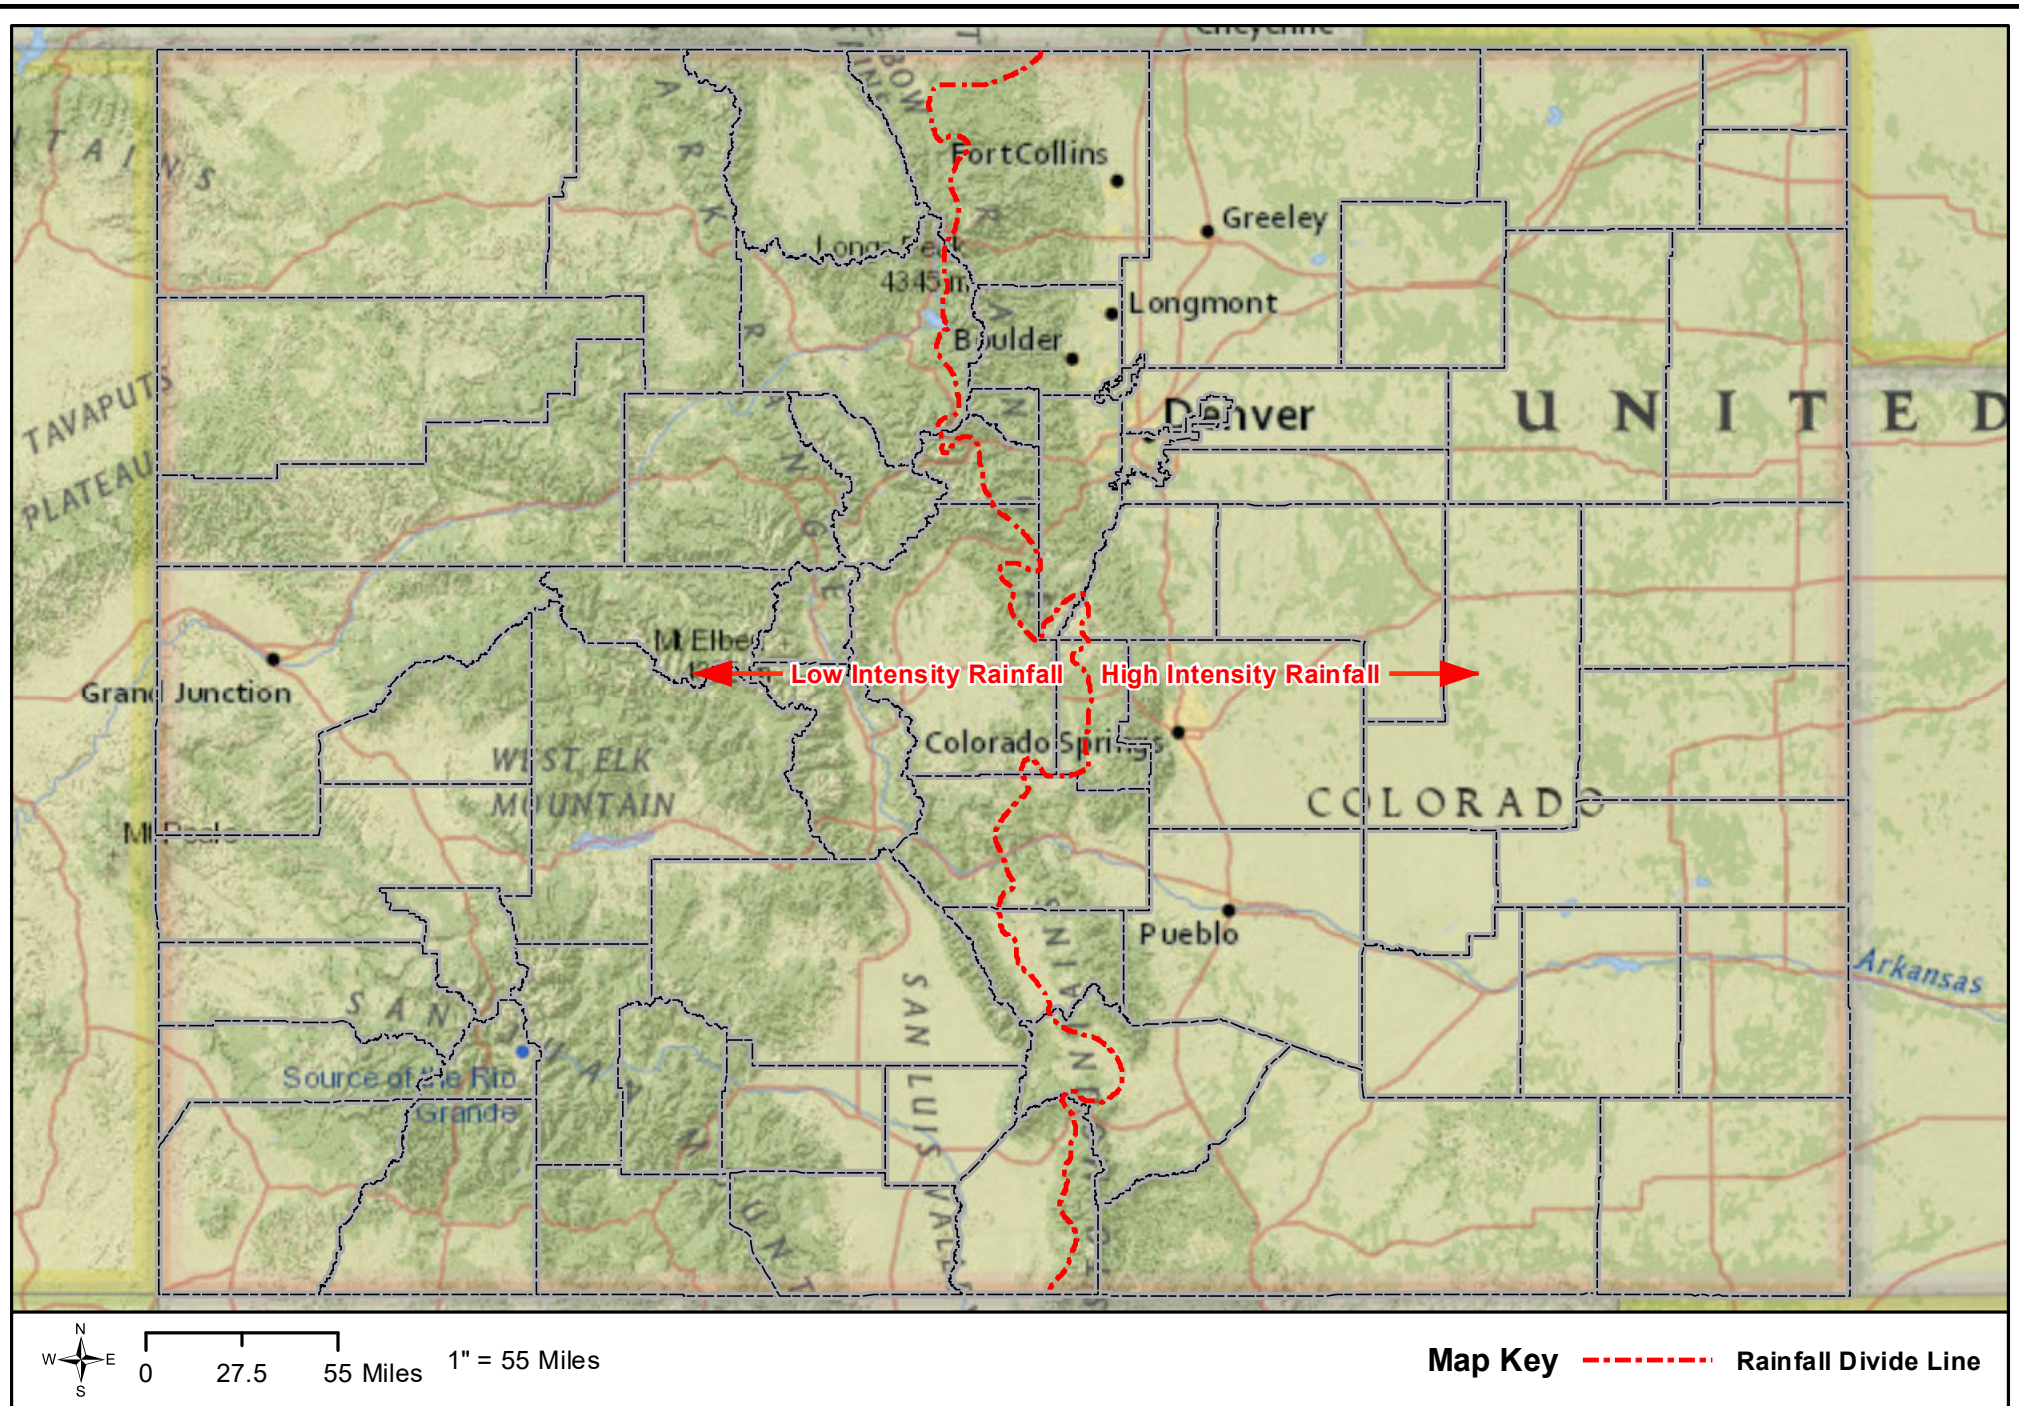


COLORADO
Division of Water Resources
Department of Natural Resources

Rainfall Intensity Zones for Non-Jurisdictional Dam Spillway Sizing




DAM SAFETY BRANCH Specifications for Construction of Non-Jurisdictional Dams

- Site Selection:
 - Foundation soils should be firm to provide adequate support for the embankment and should have low permeability to allow for water retention. Site selection should consider potential downstream property damage in the event of a dam failure. Construction of dams in boggy areas, areas with non-uniform fractured rock, or sands/gravels is not recommended and an engineer should be hired to evaluate the site conditions. Any part of the reservoir basin excavated below grade cannot expose groundwater.
- Embankment Design:
 - Backfill material to be used for construction of the cutoff trench and embankment should be a suitable clay material and contain no material larger than 6 inches in diameter.
 - The upstream slope should be constructed with a slope no steeper than 3:1, and the downstream slope should be no steeper than 2:1 (see cross section below). The dam crest should have a minimum width of 10 feet and the surface should be graded with positive drainage toward the reservoir basin.
 - It is recommended that rock rip rap or other suitable material be placed on the upstream slope of the embankment to protect it from wave action. A suitable gravel or geosynthetic material should be placed under the rip rap to prevent fine material from washing out from behind the larger rock.
 - The embankment should be fenced to restrict livestock from accessing the dam since they damage the protective vegetation and increase erosion.
- Embankment Construction
 - The topsoil and all organic material should be removed from the foundation of the proposed dam site. Organic soil should only be reused for placement on the completed embankment to promote the re-growth of vegetation.
 - A cutoff trench should be excavated under the full length of the centerline of the dam with sloping sides (1:1 min.), a minimum bottom width of 3 feet and a depth of 3 feet.
 - The foundation of the dam should be scarified/ripped to a depth of 6-inches to provide proper contact between the native foundation and embankment. This surface should then be moisture treated before placement of fill.
 - Fill material should be placed in layers not exceeding 12 inches in thickness prior to compaction. Suitable backfill material should have enough clay and moisture content to roll a small ball by hand. If this cannot be done, the soil is likely too dry or does not have adequate clay content.
 - Each lift should be thoroughly compacted using a sheeps foot compactor. Care should be taken not to allow the top layers of the soil to dry out between placement of lifts.
 - Fill should be placed in uniform lifts that cover the entire embankment length and width.
- Outlet
 - Unless a waiver is granted in writing by the Division Engineer, all non-jurisdictional dams require an outlet conduit positioned at the natural low point of the reservoir basin. A minimum diameter of 12 inches is recommended and should be controlled at the upstream end by a valve and trash rack.
- Emergency Spillway
 - The spillway should have sufficient width to provide capacity to route the runoff from the drainage basin above the dam during rainfall/runoff events.
 - The emergency spillway should be located on natural ground far enough away to prevent erosion of the dam embankment. A spillway over the dam embankment is not acceptable.
 - A minimum of 3 feet of freeboard is required from the bottom of the emergency spillway to the top of the dam.
 - To determine the minimum spillway width, see the attached table for your area and drainage basin size.
- Example Plan View and Cross Section

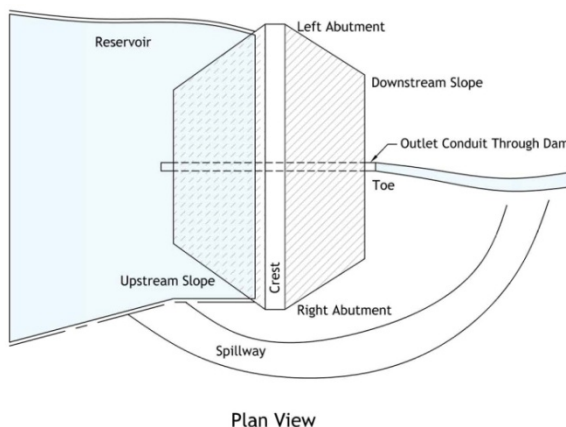


Plan View

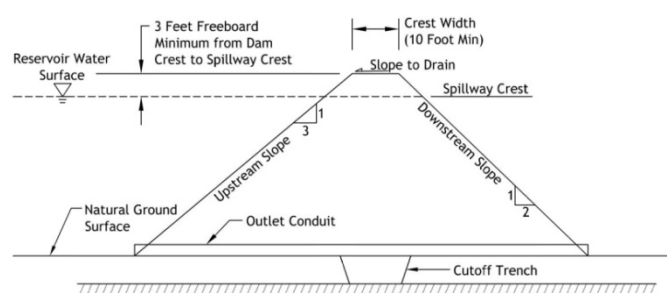

Cross Section Through Dam at Outlet

MHFD-Detention, Version 4.06 (July 2022)

Basin ID: POND 2


Example Zone Configuration (Retention Pond)

Initial Surcharge Area (A_{ISV})	=	user	ft ²
Surcharge Volume Length (L_{ISV})	=	user	ft
Surcharge Volume Width (W_{ISV})	=	user	ft
Depth of Basin Floor (H_{FLOOR})	=	user	ft
Length of Basin Floor (L_{FLOOR})	=	user	ft
Width of Basin Floor (W_{FLOOR})	=	user	ft
Area of Basin Floor (A_{FLOOR})	=	user	ft ²
Volume of Basin Floor (V_{FLOOR})	=	user	ft ³
Depth of Main Basin (H_{MAIN})	=	user	ft
Length of Main Basin (L_{MAIN})	=	user	ft
Width of Main Basin (W_{MAIN})	=	user	ft
Area of Main Basin (A_{MAIN})	=	user	ft ²
Volume of Main Basin (V_{MAIN})	=	user	ft ³
Calculated Total Basin Volume (V_{TOTAL})	=	user	acre-feet

9/3/2026, 2:37 PM

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.06 (July 2022)

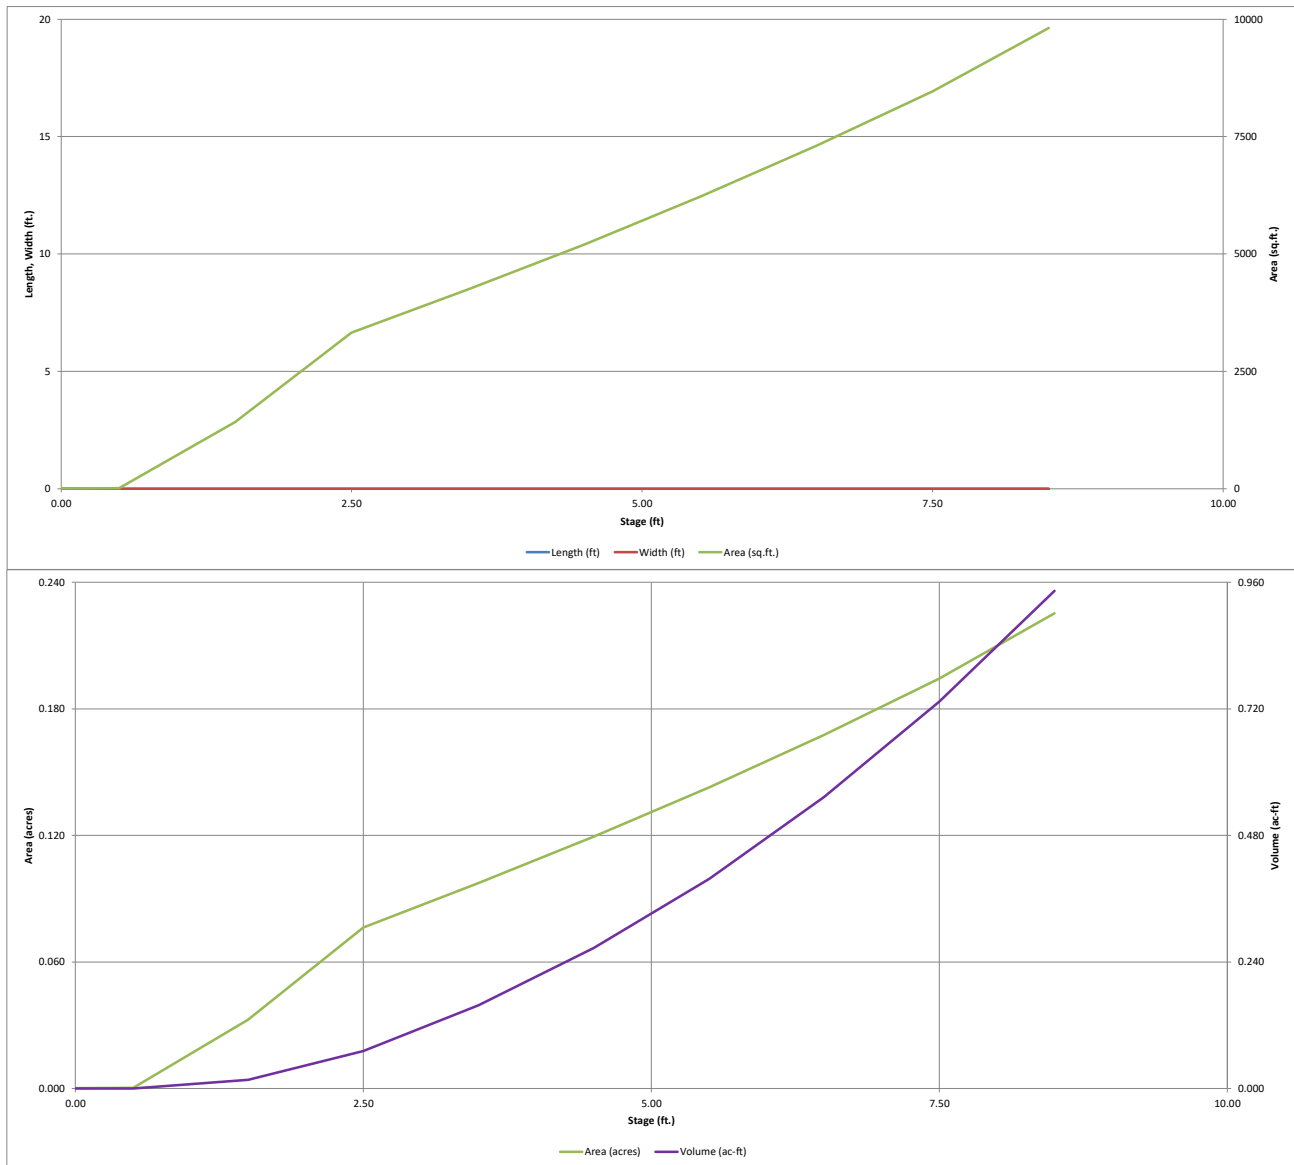


DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.06 (July 2022)

Project: **IRON RIDGE SUBDIVISION**

Basin ID: **POND 2**



Example Zone Configuration (Retention Pond)

	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	2.64	0.082	Orifice Plate
Zone 2 (EURV)	3.52	0.078	Circular Orifice
Zone 3 (100-year)	5.86	0.291	Weir&Pipe (Restrict)
Total (all zones)		0.451	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth = ft (distance below the filtration media surface)
Underdrain Orifice Diameter = inches

Calculated Parameters for Underdrain

Underdrain Orifice Area = ft²
Underdrain Orifice Centroid = feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Centroid of Lowest Orifice = ft (relative to basin bottom at Stage = 0 ft)
Depth at top of Zone using Orifice Plate = ft (relative to basin bottom at Stage = 0 ft)
Orifice Plate: Orifice Vertical Spacing = inches
Orifice Plate: Orifice Area per Row = sq. inches

Calculated Parameters for Plate

WQ Orifice Area per Row = ft²
Elliptical Half-Width = feet
Elliptical Slot Centroid = feet
Elliptical Slot Area = ft²

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	1.75						
Orifice Area (sq. inches)	0.44	0.44						

	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

Invert of Vertical Orifice = ft (relative to basin bottom at Stage = 0 ft)
Depth at top of Zone using Vertical Orifice = ft (relative to basin bottom at Stage = 0 ft)
Vertical Orifice Diameter = inches

Calculated Parameters for Vertical Orifice

Vertical Orifice Area = ft²
Vertical Orifice Centroid = feet

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir and No Outlet Pipe)

Calculated Parameters for Overflow Weir

	Zone 3 Weir	Not Selected		Zone 3 Weir	Not Selected	
Overflow Weir Front Edge Height, H _o =	3.75	N/A	ft (relative to basin bottom at Stage = 0 ft)	3.75	N/A	feet
Overflow Weir Front Edge Length =	3.00	N/A	feet	3.00	N/A	feet
Overflow Weir Grate Slope =	0.00	N/A	H:V		N/A	
Horiz. Length of Weir Sides =	3.00	N/A	feet		N/A	
Overflow Grate Type =	Type C Grate	N/A			N/A	
Debris Clogging % =	50%	N/A	%		N/A	

Height of Grate Upper Edge, H _t =	3.75	N/A	feet
Overflow Weir Slope Length =	3.00	N/A	feet
Grate Open Area / 100-yr Orifice Area =	5.09	N/A	
Overflow Grate Open Area w/o Debris =	6.26	N/A	ft ²
Overflow Grate Open Area w/ Debris =	3.13	N/A	ft ²

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

	Zone 3 Restrictor	Not Selected		Zone 3 Restrictor	Not Selected	
Depth to Invert of Outlet Pipe =	1.50	N/A	ft (distance below basin bottom at Stage = 0 ft)	1.23	N/A	ft ²
Outlet Pipe Diameter =	24.00	N/A	inches	0.48	N/A	feet
Restrictor Plate Height Above Pipe Invert =	9.95	N/A	inches	1.40	N/A	radians

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Calculated Parameters for Spillway

Spillway Invert Stage =	6.75	ft (relative to basin bottom at Stage = 0 ft)	Spillway Design Flow Depth =	0.62	feet
Spillway Crest Length =	10.00	feet	Stage at Top of Freeboard =	8.37	feet
Spillway End Slopes =	4.00	H:V	Basin Area at Top of Freeboard =	0.22	acres
Freeboard above Max Water Surface =	1.00	feet	Basin Volume at Top of Freeboard =	0.91	acre-ft


Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
Design Storm Return Period =	N/A	N/A	0.92	1.20	1.44	1.82	2.13	2.47	3.36
One-Hour Rainfall Depth (in) =	0.082	0.160	0.086	0.169	0.293	0.632	0.858	1.170	1.867
CUHP Runoff Volume (acre-ft) =	N/A	N/A	0.086	0.169	0.293	0.632	0.858	1.170	1.867
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	0.1	1.1	3.2	8.7	12.0	16.1	25.5
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A							
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A	N/A							
Predevelopment Unit Peak Flow, q (cfs/acre) =	N/A	N/A	0.02	0.12	0.33	0.91	1.26	1.69	2.67
Peak Inflow Q (cfs) =	N/A	N/A	1.4	2.8	4.9	10.5	13.8	18.0	27.8
Peak Outflow Q (cfs) =	0.0	0.1	0.0	0.1	1.7	8.2	12.0	14.4	16.7
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A	0.0	0.5	0.9	1.0	0.9	0.7
Structure Controlling Flow =	Plate	Vertical Orifice 1	Plate	Vertical Orifice 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Spillway
Max Velocity through Grate 1 (fps) =	N/A	N/A	N/A	N/A	0.3	1.3	1.9	2.3	2.6
Max Velocity through Grate 2 (fps) =	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours) =	38	58	40	60	63	56	52	47	39
Time to Drain 99% of Inflow Volume (hours) =	40	60	42	63	67	65	63	61	56
Maximum Ponding Depth (ft) =	2.64	3.53	2.60	3.53	3.94	4.31	4.48	4.87	6.78
Area at Maximum Ponding Depth (acres) =	0.08	0.10	0.08	0.10	0.11	0.12	0.12	0.13	0.17
Maximum Volume Stored (acre-ft) =	0.082	0.161	0.079	0.161	0.203	0.244	0.263	0.311	0.599

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-*Detention*, Version 4.06 (July 2022)

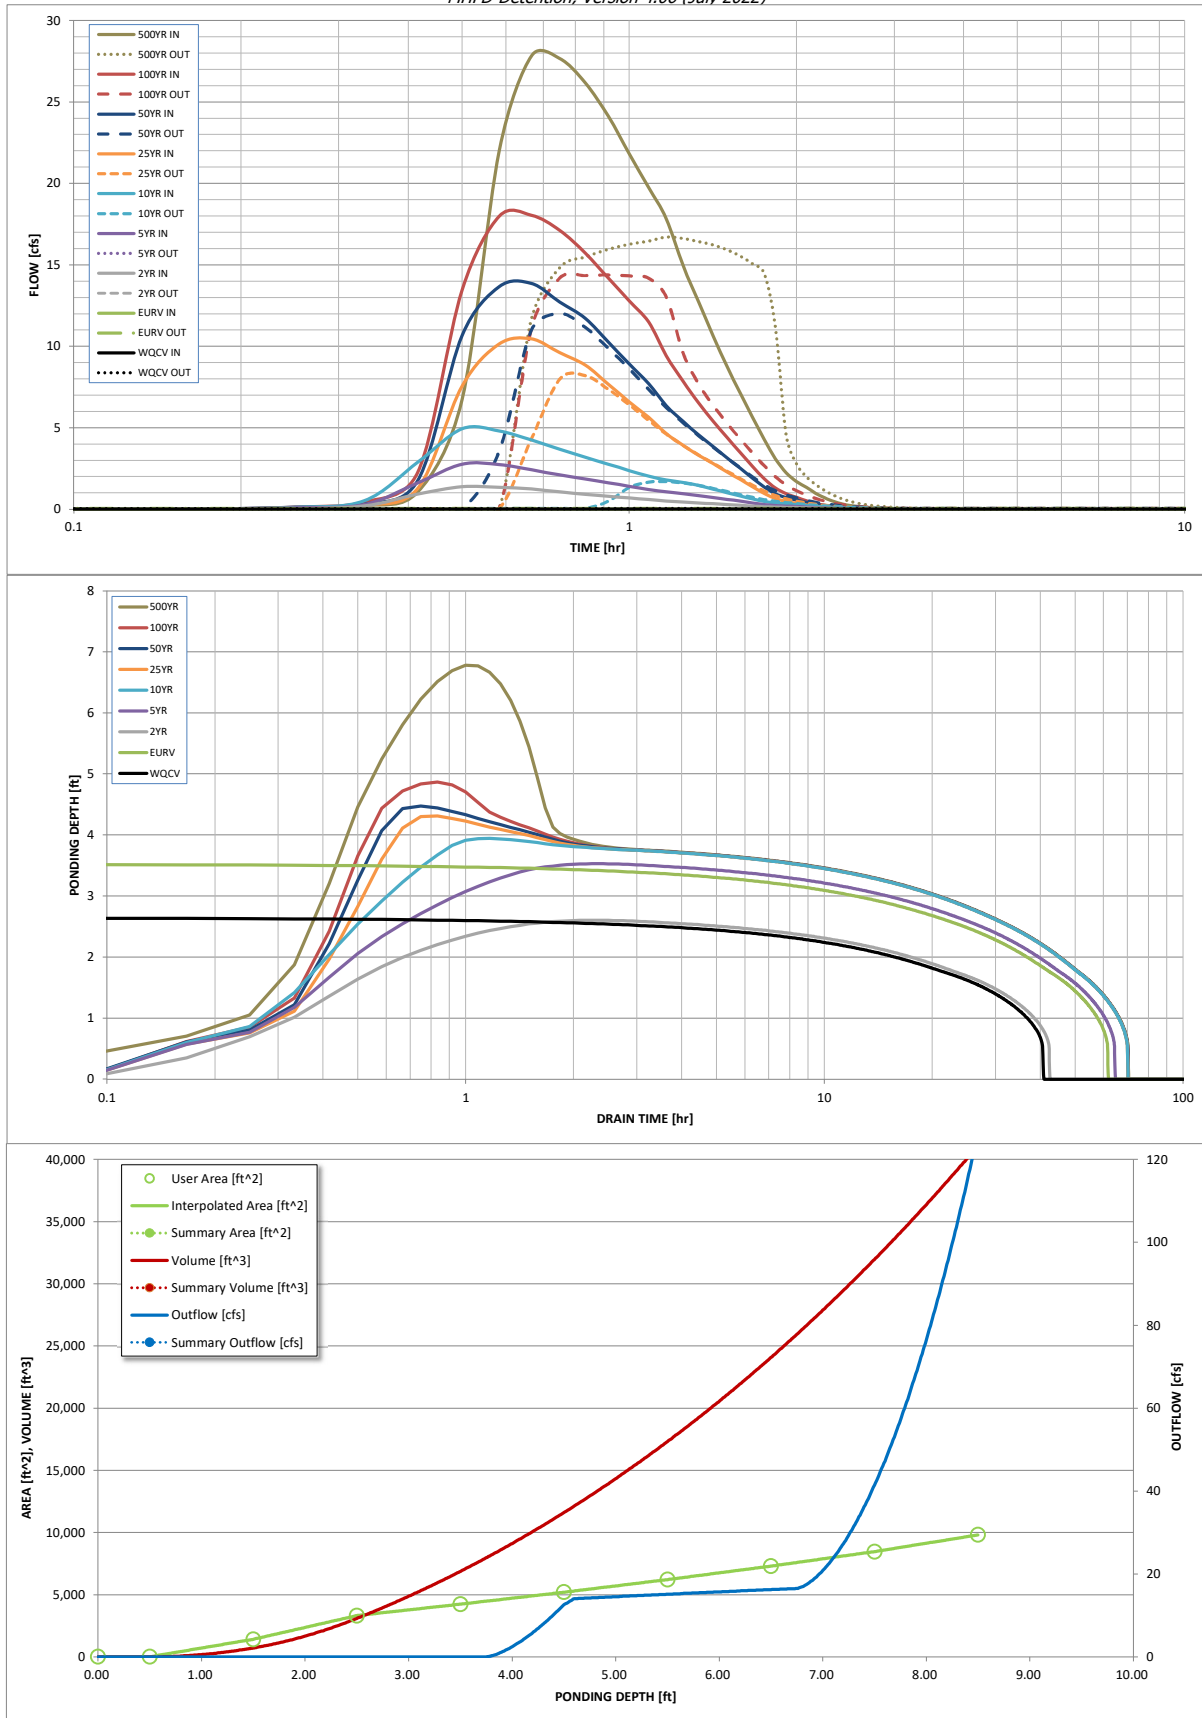

S-A-V-D Chart Axis Override	X-axis	Left Y-Axis	Right Y-Axis
minimum bound			
maximum bound			

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: _____

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

Time Interval	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04
	0:15:00	0.00	0.00	0.04	0.08	0.11	0.09	0.12	0.13	0.21
	0:20:00	0.00	0.00	0.20	0.28	0.51	0.24	0.30	0.44	1.08
	0:25:00	0.00	0.00	0.93	1.62	2.89	1.28	1.78	2.28	6.72
	0:30:00	0.00	0.00	1.38	2.76	4.93	7.55	10.66	13.45	21.99
	0:35:00	0.00	0.00	1.34	2.74	4.80	10.14	13.66	17.99	27.83
	0:40:00	0.00	0.00	1.24	2.42	4.24	10.46	13.85	18.05	27.67
	0:45:00	0.00	0.00	1.06	2.11	3.69	9.61	12.72	17.11	26.17
	0:50:00	0.00	0.00	0.92	1.86	3.18	8.85	11.72	15.73	24.12
	0:55:00	0.00	0.00	0.80	1.63	2.77	7.67	10.26	14.18	21.84
	1:00:00	0.00	0.00	0.69	1.41	2.37	6.60	8.92	12.80	19.75
	1:05:00	0.00	0.00	0.59	1.21	2.03	5.64	7.70	11.49	17.83
	1:10:00	0.00	0.00	0.51	1.07	1.80	4.64	6.35	9.42	14.95
	1:15:00	0.00	0.00	0.44	0.96	1.65	3.93	5.40	7.85	12.75
	1:20:00	0.00	0.00	0.39	0.83	1.46	3.32	4.56	6.53	10.61
	1:25:00	0.00	0.00	0.34	0.71	1.23	2.80	3.84	5.40	8.76
	1:30:00	0.00	0.00	0.29	0.61	1.02	2.29	3.15	4.41	7.15
	1:35:00	0.00	0.00	0.24	0.50	0.82	1.83	2.52	3.49	5.66
	1:40:00	0.00	0.00	0.19	0.39	0.63	1.39	1.92	2.64	4.29
	1:45:00	0.00	0.00	0.16	0.29	0.47	0.98	1.37	1.87	3.09
	1:50:00	0.00	0.00	0.14	0.23	0.38	0.66	0.95	1.30	2.23
	1:55:00	0.00	0.00	0.12	0.20	0.33	0.47	0.71	0.95	1.70
	2:00:00	0.00	0.00	0.10	0.17	0.28	0.36	0.57	0.73	1.35
	2:05:00	0.00	0.00	0.08	0.14	0.22	0.26	0.42	0.51	0.98
	2:10:00	0.00	0.00	0.06	0.10	0.17	0.19	0.30	0.35	0.69
	2:15:00	0.00	0.00	0.05	0.08	0.13	0.14	0.22	0.24	0.48
	2:20:00	0.00	0.00	0.04	0.06	0.10	0.10	0.16	0.15	0.32
	2:25:00	0.00	0.00	0.03	0.05	0.07	0.07	0.12	0.11	0.22
	2:30:00	0.00	0.00	0.02	0.03	0.05	0.05	0.09	0.08	0.16
	2:35:00	0.00	0.00	0.02	0.03	0.04	0.04	0.06	0.06	0.12
	2:40:00	0.00	0.00	0.01	0.02	0.03	0.03	0.05	0.05	0.09
	2:45:00	0.00	0.00	0.01	0.01	0.02	0.02	0.04	0.04	0.07
	2:50:00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.05
	2:55:00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.04
	3:00:00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02
	3:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
	3:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
	3:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.06 (July 2022)

Summary Stage-Area-Volume-Discharge Relationships

The user can create a summary S-A-V-D by entering the desired stage increments and the remainder of the table will populate automatically.

The user should graphically compare the summary S-A-V-D table to the full S-A-V-D table in the chart to confirm it captures all key transition points.

[illegible]