




LSC TRANSPORTATION CONSULTANTS, INC.
102 S. Tejon Street, Suite 1100
Colorado Springs, CO 80903
(719) 633-2868
FAX (719) 633-5430
E-mail: lsc@lsctrans.com
Website: <http://www.lsctrans.com>

Monument Academy South Residential Rezone
Updated Traffic Impact Study
EPC PCD File No.:
(LSC #S254260)
September 4, 2026

Traffic Engineer's Statement

This traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.

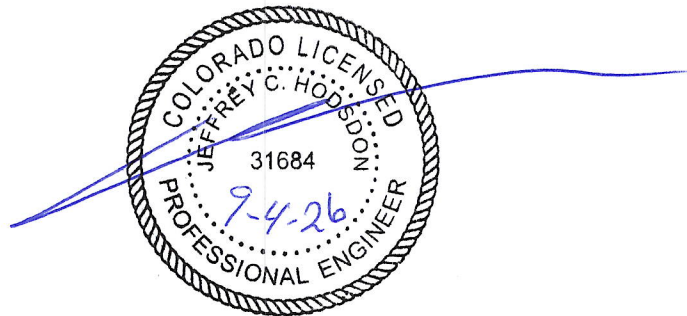

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

Date

Monument Academy South Residential Rezone Traffic Impact Study

Prepared for:
Matt and Bill Dunston
1230 Scarsbrook Court
Monument, CO 80132-8487

SEPTEMBER 4, 2026

LSC Transportation Consultants, Inc.
Prepared by: Jeffrey C. Hodsdon, P.E.

LSC #S254260

EPC PCD File No.:



CONTENTS

REPORT CONTENTS	1
PRIOR TRAFFIC REPORTS.....	2
LAND USE AND ACCESS.....	2
Tract A.....	2
Tract B	4
Previous Land Use Assumptions	4
ROADWAY AND TRAFFIC CONDITIONS AND MTCP CLASSIFICATION	4
Study Area Roadway System	4
Existing Traffic Volumes	5
Existing Level of Service	6
Existing Vehicle Queuing Observations	6
Crash History Data	6
State Highway 83/Highway 105/Walker Road	6
Jane Lundeen Drive/Walker Road	6
Jane Lundeen Drive/Pinehurst Circle.....	7
State Highway 83/Pinehurst Circle	7
Existing Pedestrian and Bicycle Facilities.....	7
2026 Short Term Baseline Traffic Volumes.....	7
SIGHT DISTANCE ANALYSIS	7
TRIP GENERATION.....	8
Tract A.....	8
Tract B	8
TRIP DISTRIBUTION AND ASSIGNMENT	9
Trip Directional Distribution	9
Site-Generated Traffic.....	9
Tract A	9
Tract B	9
2026 Short-Term Total Traffic Volumes.....	9
2045 Background Traffic Volumes.....	10
2045 Total Traffic Volumes	10
LEVEL OF SERVICE ANALYSIS	10
Intersection Level of Service	10

State Highway 83/Highway 105/Walker Road	11
Short Term	11
Long Term	12
Roundabout (Alternative LOS)	12
Jane Lundeen Drive/Walker Road	12
Short Term	12
Long Term	12
Jane Lundeen Drive/Pinehurst Circle	13
Tract A Site Access to Jane Lundeen Drive	13
North Site Access (RIRO)	13
Middle Site Access (Full-Movement)	13
South Site Access (to Jane Lundeen Drive) (Full-Movement)	13
Tract B Site Access to Pinehurst Circle	14
West Site Access (at the Pinehurst Roundabout)	14
East Site Access (Full-Movement)	14
Intersection LOS Mitigation Alternatives	14
State Highway 83/Highway 105/Walker Road	14
Jane Lundeen Drive/Proposed Tract A Middle Site Access	15
Other Alternatives	17
VEHICLE QUEUEING ANALYSIS	17
Existing Conditions	18
Short Term – Existing Laneage with Existing Signal Timings	18
Long Term – Recommended Laneage (with Modified Signal Timings)	19
Westbound Approach	19
Eastbound Approach	19
STREET CLASSIFICATIONS	19
Walker Road	19
Jane Lundeen Drive	20
Tract A (Preliminary)	20
Tract B	20
ROADWAY IMPROVEMENTS	20
MTCP-Identified Roadway Improvements	20
Highway 105 (Project # 508)	20

Walker Road (Project # 154)	20
ECM Requirements for Auxiliary Turn Lanes	21
Left-Turn Deceleration Lanes.....	21
Right-Turn Deceleration Lane	21
Right-Turn Acceleration Lanes	21
Auxiliary-Turn-Lane Needs Evaluation and Recommendations	21
Tract A – North Site Access (RIRO).....	21
Tract A – Middle Site Access (Full-Movement).....	22
Tract A – South Site Access (Full-Movement).....	22
Tract A – Southwest Site Access (Left-In Only)	22
Tract B – West Site Access (Roundabout).....	22
Tract B – East Site Access (Full-Movement).....	22
State Highway 83/Highway 105/Walker Road	23
TRACT A AND B ROADWAY CLASSIFICATIONS	24
COUNTY ROAD IMPROVEMENT FEE PROGRAM	24
Transportation Impact Fees	24
MULTI-MODAL TRANSPORTATION AND TDM OPPORTUNITIES.....	24
DEVIATIONS	24
FINDINGS AND CONCLUSIONS	24
Enclosures:	25
Table 3	25
Figure 1 - Figure 13.....	25
Traffic Count Reports	25
Synchro LOS Reports	25
Sidra LOS Reports	25
Queue Reports.....	25



LSC TRANSPORTATION CONSULTANTS, INC.
102 S. Tejon Street, Suite 1100
Colorado Springs, CO 80903
(719) 633-2868
FAX (719) 633-5430
E-mail: lsc@lsctrans.com
Website: <http://www.lsctrans.com>

September 4, 2026

Matt and Bill Dunston
1230 Scarsbrook Ct
Monument, CO 80132-8487

RE: Monument Academy South
Residential Rezone
Updated Traffic Impact Study
El Paso County, CO
EPC PCD File No.:
LSC #S254260

Dear Messrs. Dunston,

LSC Transportation Consultants, Inc. has prepared this Traffic Impact Study to accompany the rezoning applications for two parcels of land (35 total acres) located southeast of the intersection of State Highway (SH) 83/Walker Road. in unincorporated El Paso County, Colorado. The site location is shown in Figure 1. The properties are proposed for rezoning for residential development. These parcels are located just west and south of the Monument Academy Charter School (East Campus).

Access would be to Pinehurst Circle and Jane Lundeen Drive. No direct access is proposed to SH 83 or Walker Road.

This report has been prepared for submittal to El Paso County and CDOT.

REPORT CONTENTS

The preparation of this report included the following:

- An inventory of existing roadway and traffic conditions on major thoroughfares adjacent to the site, including surface conditions, functional classification, widths, pavement markings, traffic-control signs, posted speed limits, intersection and access spacing, roadway and intersection alignments, roadway grades, and auxiliary turn lanes;
- Weekday peak-hour turning-movement traffic counts (AM, school-PM, and PM) at the following “study-area” intersections:
 - State Highway 83/Highway 105/Walker Road
 - State Highway 83/Pinehurst Circle
 - Walker Road/Jane Lundeen Drive
 - Jane Lundeen Drive/Pinehurst Circle
 - Pinehurst Circle/Monument Academy site access

- Estimated average daily traffic (ADT) volumes on the study-area roadway segments;
- Projections of short-term baseline (2026) and 20-year background traffic volumes on the study-area roadways adjacent to the site;
- The proposed site land use and access plan;
- Estimates of average weekday and weekday peak-hour trip generation for the proposed development and the estimated directional distribution of site-generated vehicle trips on roadways and intersections adjacent to and in the vicinity of the site;
- Projected site-generated and resulting total peak-hour intersection traffic volumes at the study-area intersections;
- Intersection level of service (LOS) analysis at the study-area intersections; generalized daily traffic-volume “level of service” (or comparison to El Paso County’s *Engineering Criteria Manual* design ADT by classification) on the study-area streets;
- Findings regarding any potential roadway improvements, including evaluation of short-term and long-term projected intersection volumes to determine potential requirements for any new auxiliary right-/left-turn lanes at the proposed site-access points and/or study-area intersections, based on the criteria in El Paso County’s *Engineering Criteria Manual* (ECM) and CDOT’s *State Highway Access Code*.

PRIOR TRAFFIC REPORTS

The following previous traffic reports have been utilized/referenced when preparing this report.

- Walden Preserve Filing No. 5 ([SF2211](#))
- Monument Academy Charter School ([PPR199](#))
- Monument Academy Minor Subdivision

LAND USE AND ACCESS

The proposed rezone to multiple residential zone districts includes two parcels of land – Tracts A and B MA SUB. (Monument Academy Subdivision) plus two smaller parcels east of Tract B and the school.

Tract A

As shown in Figure 1, the 15.35-acre site is located west of Jane Lundeen Drive, south of Walker Road, and east of State Highway 83 (El Paso County parcel ID [6115011001](#)).

Table 1 below shows the proposed zoning and land uses by ITE land use category for the north and south parts of Tract A and Tract B:

Table 1: Proposed Zoning and Land Uses

ITE Land Uses			
Code	Description	Value	Units ¹
<u>Tract A - North Portion- - Proposed Zoning: RM-12</u>			
215	Single-Family (Attached) Housing	55	DU
220	Multi-Family Housing (Low-Rise)	30	DU
	Total	85	DU
<u>Tract A - South Portion - - Proposed Zoning: RS-5000</u>			
210	Single-Family (Detached) Housing	23	DU
215	Single-Family (Attached) Housing	23	DU
	Total	46	DU
<u>Tract B - Proposed Zoning: PUD</u>			
210	Single-Family (Detached) Housing	29	DU
¹ DU = dwelling units			
August 12, 2026			

Tract A access is proposed to Jane Lundeen Drive at three locations and one access to Pinehurst Circle is also proposed as shown in Figure 2. The north access is proposed as a right-in/right-out (RIRO), while the middle and south access points to Jane Lundeen are proposed to be full-movement.

Three Tract A accesses to Jane Lundeen Drive are proposed:

- Full-movement – located approximately 330 feet south of proposed north RIRO access
- Full-movement – located approximately 317 feet north of Pinehurst/Jane Lundeen (The spacing of this access point to Jane Lundeen will be subject to approval of a deviation. This deviation will be applied for later - at the subdivision stage of development rather than with this rezone application).
- Right-in/right-out (RIRO) access point to Jane Lundeen – proposed for a location approximately 504 feet south of Walker /Jane Lundeen (This will be subject to approval of a deviations. This deviation will be applied for later - at the subdivision stage of development rather than with this rezone application).

One access point is proposed to Pinehurst Circle located approximately 252 feet west of Jane Lundeen Drive. This access would be a left-in-only for eastbound traffic turning into the site from the adjacent one-way section of Pinehurst Circle. This access will also be subject to approval of a deviation, which will also be applied for later - at the subdivision stage of development rather than with this rezone application.

While no specific plans have been prepared at this rezone stage, this report assumes these access points would be subdivision **public street** connections.

Tract B

As shown in Figure 1, the 19.9-acre Tract B parcel is located south of Pinehurst Circle and east of State Highway 83 (El Paso County parcel ID [6115010031](#)). Approximately 29 single-family dwelling units are anticipated for the Tract B site.

Primary access for Tract B is proposed to Pinehurst Circle as a new south leg of the Jane Lundeen Drive roundabout. A secondary access to Pinehurst Circle is also planned. This access would be located southeast of the Monument Academy southeast access. The specific location of this access and necessary analysis at the PUD-level will be addressed in a TIS Supplement (to this report) for Tract B PUD Zoning, which will be submitted shortly once a few design-level details at the Tract B access points are completed. . These new connections are proposed to be full-movement intersections. The Tract B access plan is shown in Figure 2.

Previous Land Use Assumptions

Previously, land-use assumptions for Tracts A and B with the original Monument Academy TIS were based on rezoning shown in the Black Forest Master Plan at the time the school TIS was prepared (2018):

- The Monument Academy TIS assumed Tracts A and B would be developed with a more intense mix of retail and office uses. Appendix Table 1 from the MA TIS is attached, for reference.
- Prior traffic reports included long term background traffic that may be generated by future development of land northeast of Walker Road/SH 83. A mix of future residential and commercial uses were assumed. These same estimated background trips have been assumed in this report.

ROADWAY AND TRAFFIC CONDITIONS AND MTCP CLASSIFICATION

Study Area Roadway System

Figure 1 shows the roads adjacent to and in the vicinity of the site. Adjacent roads serving the site are identified below, followed by a brief description of each:

State Highway 83 (SH 83) runs north-to-south from Interquest Parkway to downtown Denver and is classified as a two-lane “R-A – Regional Highway.” Adjacent to the site, the posted speed limit on SH 83 is 60 miles per hour (mph) south of Highway 105/Walker Road and 65 mph north of this intersection. Auxiliary left-turn deceleration lanes, right-turn deceleration lanes, and right-turn acceleration lanes exist on both the northbound and southbound approaches at its intersection with Highway 105/Walker Road. SH 83 is owned and maintained by CDOT.

Highway 105 is classified by El Paso County as a two-lane, Rural Principal Arterial that extends east-to-west from Jackson Creek Parkway to SH 83. The posted speed limit on Highway 105

adjacent to the site is 50 mph. Auxiliary turn lanes currently exist at its signalized intersection with SH 83. East of Highway 105, Highway 105 is renamed Walker Road. Highway 105 is owned and maintained by El Paso County.

Walker Road is classified by El Paso County as a two-lane, Rural Major Collector (2045 *Major Transportation Corridors Plan (MTCP) Roadway Plan*) that extends east from SH 83 to Meridian Road. Generally, the Walker Road posted speed limit is 45 mph east of State Highway 83. The posted speed limit on Walker Road is 35 mph in the westbound direction beginning about 600 feet east of Jane Lundeen Drives. No posted speed limit signs were observed in the eastbound direction east of State Highway 83. Walker Road is owned and maintained by El Paso County.

Jane Lundeen Drive extends north-to-south for 0.3 miles from Walker Road to Pinehurst Circle. The roadway has been constructed with an urban, non-residential collector cross section. Auxiliary turn lanes currently exist on the northbound approach at its roundabout intersection with Walker Road. No auxiliary turn lanes currently exist on the southbound approach at its roundabout intersection with Pinehurst Circle. A new northbound leg to the current roundabout T-intersection of Jane Lundeen Drive/Pinehurst Circle will be constructed as part of this development, which would create a four-leg roundabout intersection. The posted speed limit on Jane Lundeen Drive is 30 mph, and curb-and-gutter is present. Ownership of Jane Lundeen Drive has not been accepted by El Paso County at the time of this application.

Pinehurst Circle is a primarily a rural, two-lane paved Rural Local roadway extending generally east-to-west for 1.8 miles from SH 83 to Walden Way. The posted speed limit on Pinehurst Circle is 30 mph. The section of Pinehurst Circle between SH 83 and the roundabout at Jane Lundeen Drive is one way eastbound. Pinehurst Circle is owned and maintained by El Paso County.

Please refer to Figure 3 for existing intersection laneage, traffic control, peak-hour volumes, and average daily traffic volumes.

Existing Traffic Volumes

Vehicular intersection turning-movement counts were conducted at the following intersections. Counts were conducted during the following periods - the morning peak, mid-afternoon “school” peak, and late-afternoon peak traffic periods. Figure 3 shows peak-hour volumes based on the turning-movement volume data (raw-count data sheets are attached), as well as estimated weekday (AWT) traffic volumes:

- State Highway 83/Highway 105/Walker Road
 - Tuesday, May 13, 2025 from 6:30 a.m. – 8:30 a.m.
 - Tuesday, May 13, 2025 from 3:00 p.m. – 6:00 p.m.
- Jane Lundeen Drive/Walker Road
 - Wednesday, October 15, 2025 from 6:30 a.m. – 8:30 a.m.
 - Wednesday, October 15, 2025 from 3:00 p.m. – 6:00 p.m.

- Jane Lundeen Drive/Pinehurst Circle
 - Wednesday, October 15, 2025 from 6:30 a.m. – 8:30 a.m.
 - Wednesday, October 15, 2025 from 3:00 p.m. – 6:00 p.m.
- State Highway 83/Pinehurst Circle
 - Tuesday, May 13, 2025 from 6:30 a.m. – 8:30 a.m.
 - Tuesday, May 13, 2025 from 3:00 p.m. – 6:00 p.m.

Existing Level of Service

Existing intersection level of service is summarized on Figure 3. Please refer to the level of service section for LOS definitions, methodology, and complete details.

Existing Vehicle Queuing Observations

During May 2025 data collection (morning peak hour), queues on the westbound approach at Walker/SH 83 were observed backing into the Jane Lundeen/Walker Roundabout during a 15—20-minute period of time starting at 7:35 am. Queues were observed backing into the outermost circulating lane, but not the inner circulating lane) around the north side of the circle. Also, for about 8—10 minutes, queues extended back onto the Jane Lundeen northbound approach. While some non-school motorists likely incur associated delay, the effect of queue spillback did not appear to be particularly problematic, as northbound motorists appeared to wait to enter the roundabout to avoid blockage of eastbound through traffic. Based on traffic crash/accident information LSC was able to obtain, no crashes have been reported at the intersection of Jane Lundeen Drive/Walker Road during the past three years.

Crash History Data

Three years of reported crash data (2022-2025) were obtained and reviewed by LSC at the study-area intersections.

State Highway 83/Highway 105/Walker Road

Seven crashes were reported at this intersection from 2022-2025. Two of the crashes involved injuries, while none resulted in a fatality. No correctable crash patterns were identified in the crashes recorded.

Jane Lundeen Drive/Walker Road

No crashes were reported at the intersection of Jane Lundeen Drive/Walker Road during the past three years.

Jane Lundeen Drive/Pinehurst Circle

No crashes were reported at the intersection of Jane Lundeen Drive/Pinehurst Circle during the past three years.

State Highway 83/Pinehurst Circle

No crashes were reported at the intersection of State Highway 83/Pinehurst Circle during the past three years.

Existing Pedestrian and Bicycle Facilities

Currently, sidewalks exist on the east side of Jane Lundeen Drive between the roundabouts at Walker Road and Pinehurst Circle. That sidewalk then continues along the north side of Pinehurst Circle for about 500 feet between the roundabout and the Monument Academy school access. **Sidewalk is required on the west side of Jane Lundeen Drive, per approved CDR201.**

Bicycle facilities do not currently exist on the study-area roadways.

2026 Short Term Baseline Traffic Volumes

Figure 4 shows the estimated 2026 short-term baseline turning movements at the study-area intersections:

- State Highway 83/Highway 105/Walker Road
- State Highway 83/Pinehurst Circle
- Jane Lundeen Drive/Walker Road
- Jane Lundeen Drive/Pinehurst Circle

These volumes represent existing traffic volumes from Figure 3 plus projected future trips from currently undeveloped, platted lots in Walden Preserve Filing No. 5. As of November 2025, there were 45 residential lots that were under construction or vacant in this adjacent subdivision east of Tract B. ITE Land Use Code “210 – Single-Family (Detached) Housing” was used to estimate projected future traffic from these 45 single-family dwelling units, which were then added to existing traffic counts to establish short-term baseline traffic volumes.

Baseline volumes also reflect minor adjustments to the count data presented in Figure 3.

SIGHT DISTANCE ANALYSIS

Sight distance for Tract A access points will be evaluated with the future applications for SDP and final plat. Sight distance for the Tract B access points will be addressed in a TIS Supplement (to this report) for Tract B PUD Zoning, which will be submitted with the Tract B PUD submittal.

TRIP GENERATION

Estimates of the vehicle trips projected to be generated by the proposed Tract A and Tract B residential rezones and planned subdivisions/development (following rezoning application approval) have been made using the nationally published trip-generation rates from *Trip Generation, 12th Edition, 2025* by the Institute of Transportation Engineers (ITE).

Table 2 below presents a **summary** of the estimated Tract A and B site trip generation. A detailed trip-generation estimate, including ITE rates for the proposed land uses, is presented in Table 3 (attached).

Table 2: Estimated Site Vehicle-Trip Generation Summary

Tract A (131 Dwelling Units)			
Analysis Period	In	Out	Total
Morning Peak Hour	21	62	83
School Afternoon Peak Hour	34	29	63
Afternoon Peak Hour	29	47	76
Daily/24-Hour	470	279	940
Tract B (29 Dwelling Units)			
Analysis Period	In	Out	Total
Morning Peak Hour	6	15	21
School Afternoon Peak Hour	14	9	23
Afternoon Peak Hour	17	10	27
Daily/24-Hour	146	146	293

Tract A

Approximately 131 residential dwelling units are envisioned for Tract A. Table 2 above shows this estimated site vehicle-trip generation for Tract A is as follows:

- 24-hour daily – 940 total vehicle trips, with about half entering and half exiting the site
- AM peak hour – 21 entering trips and 62 exiting trips
- School-PM peak hour – 34 entering trips and 29 exiting trips
- PM peak hour – 47 entering trips and 32 exiting trips

Tract B

Approximately 29 single-family detached dwelling units are proposed for Tract B. Estimated site vehicle-trip generation for Tract B is as follows:

- 24-hour daily – 293 total vehicle trips, with about half entering and half exiting the site
- AM peak hour – 6 entering trips and 15 exiting trips
- School-PM peak hour – 14 entering trips and 9 exiting trips
- PM peak hour – 17 entering trips and 10 exiting trips

TRIP DISTRIBUTION AND ASSIGNMENT

Trip Directional Distribution

The directional-distribution estimate of site-generated vehicle trips to the study-area roads and intersections is a necessary component in determining the site's traffic impacts. Figure 5 shows the percentages of the site-generated vehicle trips projected to be oriented to and from the site's major approaches. Estimates have been based on the following factors: the area traffic impact studies, the traffic-count data, the proposed land use, the area roadway system serving the site, and the site's geographic location relative to the Monument and El Paso County/Colorado Springs areas.

Site-Generated Traffic

Site-generated traffic volumes have been estimated at the following study-area intersections:

- State Highway 83/Highway 105/Walker Road
- State Highway 83/Pinehurst Circle
- Jane Lundeen Drive/Walker Road
- Jane Lundeen Drive/Pinehurst Circle

These site-generated volumes have been calculated by applying directional-distribution percentages estimated by LSC (from Figure 5) to the trip-generation estimates (from Table 3).

Tract A

Figure 6 shows the projected site-generated traffic volumes for the average weekday and weekday morning and afternoon peak hours for Tract A only.

Tract B

Figure 7 shows the projected site-generated traffic volumes for the average weekday and weekday morning and afternoon peak hours for Tract B only.

2026 Short-Term Total Traffic Volumes

Figure 8 shows the sum of short-term baseline traffic volumes (from Figure 4), site-generated volumes from Tract A (shown in Figure 6), and site-generated volumes from Tract B (shown in Figure 7). These volumes represent the projected short-term total traffic following development of the site.

2045 Background Traffic Volumes

Long-term background traffic volumes are estimates by LSC. Estimated site-generated traffic for the Tract A and Tract B residential developments is **not** included in 2045 background traffic volumes.

The following 20-year growth factors were applied to through volumes on SH 83, per data published on CDOT's Online Transportation Information System (OTIS):

- 1.37 – south of Highway 105/Walker Road
- 1.42 – south of Highway 105/Walker Road

Several currently-vacant parcels in the vicinity of the site were also considered when estimating additional long-term background traffic:

- North leg of Jane Lundeen/Walker roundabout – 150 single-family dwelling units and 30,000 square feet of retail space
- Walker Road, east of Jane Lundeen – 1.50 growth factor for potential residential growth east of the roundabout
- North and south of Highway 105, west of SH 83 – several vacant lots that are zoned RR-5
- Northeast corner of Jane Lundeen/Pinehurst roundabout – trips shown in the Monument Academy TIS (originally anticipated to be a YMCA fitness center)
- Estimated trips using the Monument Academy north access to Jane Lundeen Drive.

Please refer to Figure 9 for estimated long-term background volumes at the study-area intersections.

2045 Total Traffic Volumes

Figure 10 shows the sum of 2045 background traffic volumes (from Figure 9) plus site-generated traffic volumes (from Figure 6 and Figure 7).

LEVEL OF SERVICE ANALYSIS

Intersection Level of Service

Level of service (LOS) is a quantitative measure of the level of congestion or delay at an intersection and is indicated on a scale from "A" to "F." LOS A is indicative of little congestion or delay. LOS F indicates a high level of congestion or delay. Table 4 shows the level of service delay ranges for signalized and unsignalized intersections.

Table 4: Intersection Levels of Service Delay Ranges

Level of Service	Signalized Intersections	Unsignalized Intersections
	Average Control Delay (seconds per vehicle)	Average Control Delay (seconds per vehicle) ⁽¹⁾
A	10.0 sec or less	10.0 sec or less
B	10.1-20.0 sec	10.1-15.0 sec
C	20.1-35.0 sec	15.1-25.0 sec
D	35.1-55.0 sec	25.1-35.0 sec
E	55.1-80.0 sec	35.1-50.0 sec
F	80.1 sec or more	50.1 sec or more
(1) For unsignalized intersections, if v/c ratio is greater than 1.0 the level of service is LOS F, regardless of the projected average control delay per vehicle.		

LOS values have been included in each figure for each turning movement/approach during the weekday morning and afternoon peak hours for the proposed site-access intersections and off-site intersections in the study area:

- Figure 3: Existing Traffic, Lane Geometry, Traffic Control, and LOS
- Figure 4: 2026 Short-Term Baseline Traffic, Lane Geometry, Traffic Control, and LOS
- Figure 8: 2026 Short-Term Baseline + Site Traffic, Lane Geometry, Traffic Control, and LOS
- Figure 9: 2045 Background Traffic, Lane Geometry, Traffic Control, and LOS
- Figure 10: 2045 Background + Site Traffic, Lane Geometry, Traffic Control, and LOS

LOS calculations for long-term scenarios were based upon the recommended lane geometries and traffic controls outlined in the figures above.

State Highway 83/Highway 105/Walker Road

Short Term

If **no** modifications are made to existing signal timings or lane geometries during the short-term scenarios, the following turning movements currently operate at and are projected to remain at LOS E or worse, with or without the addition of site-generated traffic:

- Westbound-through/right – LOS F during AM peak hour

All other movements at this intersection currently operate at and are projected to remain at LOS D or better during all short-term peak hours with the addition of site-generated traffic (without any signal-timing or lane-geometry modifications).

Note: If a second westbound-through lane were to be constructed, all individual turning movements would operate at LOS D or better during the short-term AM and PM peak hours. With minor signal-timing modifications (3 seconds of green time shifted from the northbound-through/southbound-

through phases on SH 83 to the eastbound-through/westbound-through phases on Walker/Highway 105), all individual turning movements would operate at LOS D or better during the short-term school PM peak hour with the addition of site-generated traffic.

With the addition of a second westbound through approach lane, the westbound departure leg would need to be expanded to provide two receiving lanes. Depending on the design (to be determined later), the eastbound approach laneage, and possibly the westbound left-turn lane and east-leg departure lane may need adjustment/realignment.

Long Term

Based on existing signal timings and lane geometries, the signalized intersection of SH 83/Highway 105/Walker Road is projected to operate at LOS E overall during the 2045 AM peak hour without the addition of site-generated traffic. Overall, this intersection would operate at LOS E during all three long-term total peak hours, assuming no modifications to existing signal timings or lane geometries.

As shown in Figure 10, all individual turning movements at this intersection are projected to operate at LOS D or better during all long-term peak hours with 1 westbound-through lane, 1 westbound-through/right lane, 1 westbound-left lane, 2 eastbound-through lanes (plus eastbound turn lanes), and minor signal timing modifications.

Roundabout (Alternative LOS)

If the intersection of SH 83/Highway 105/Walker Road were to be converted to a roundabout during the long term, all individual turning movements would operate at LOS D or better, with or without the addition of site-generated traffic. Please refer to the proposed roundabout laneage shown on Figure 9 and Figure 10 for more details.

Jane Lundeen Drive/Walker Road

Short Term

All movements at this intersection currently operate at and are projected to remain at LOS A during all short-term peak hours, with the addition of site-generated traffic.

Long Term

All movements at this intersection are projected to operate at LOS A for all long-term peak hours with the addition of site-generated traffic.

Jane Lundeen Drive/Pinehurst Circle

All movements at this intersection are projected to operate at LOS A during all long-term peak hours with the addition of site-generated traffic. Although queues extend back on Pinehurst Circle from the school access to the roundabout at Jane Lundeen Drive, these queues are brief (limited to only 5-10 minutes during school pick-up procedures during the school-PM peak period).

Tract A Site Access to Jane Lundeen Drive

North Site Access (RIRO)

All movements at the proposed north RIRO access to Tract A are projected to operate at LOS A during all short-term and long-term peak hours with the addition of site-generated traffic.

Middle Site Access (Full-Movement)

All movements at the proposed middle full-movement site access to Tract A are projected to operate at LOS D or better during all short-term peak hours.

During the long term, the eastbound single-lane approach is projected to operate at LOS F based on the long-term AM peak and school-PM peak analysis scenarios. All other individual turning movements/single-lane approaches are projected to operate at LOS C or better during all peak hours.

Despite this LOS F individual movement level of service, analysis results show a v/c ratio to be below 1.00 for all turning movements/approaches during all long-term buildout traffic scenarios.

Delay for the side street is projected to be in the F range during the busiest 15 minutes during Monument Academy parent drop-off and pick up. Motorists exiting the residential development will likely learn to avoid departing during these “sharp” school peak times. Drivers departing during these periods would have a good “indirect” left turn option by turning right onto Jane Lundeen drive south, complete a U-turn in the roundabout.

In response to County staff initial review comments, a “Intersection LOS Mitigation Alternatives” section has been added to this report to present alternatives for which LOS would be D or better for the site access intersections on Jane Lundeen Drive.

South Site Access (to Jane Lundeen Drive) (Full-Movement)

All movements at the proposed south full-movement site access to Tract A are projected to operate at LOS C or better during all short-term and long-term peak hours.

Tract B Site Access to Pinehurst Circle

West Site Access (at the Pinehurst Roundabout)

Currently, the intersection of Jane Lundeen Drive/Pinehurst Circle is a 3-leg roundabout. A new south leg (northbound approach) will be constructed with Tract B development.

All movements at this intersection are projected to operate at LOS A during all long-term peak hours with the addition of site-generated traffic. Although queues extend back on Pinehurst Circle from the school access to the roundabout at Jane Lundeen Drive, these queues are brief (limited to only 5-10 minutes during school pick-up procedures during the school-PM peak period).

East Site Access (Full-Movement)

Assuming a secondary access for Tract B will be constructed, all movements at the following proposed east Tract B site access are projected to operate at LOS A during all peak hours.

Intersection LOS Mitigation Alternatives

State Highway 83/Highway 105/Walker Road

Short-Term

As shown in Figure 8, if a second westbound-through lane were to be constructed, all individual turning movements would operate at LOS D or better during the short-term AM and PM peak hours. With minor signal-timing modifications (3 seconds of green time shifted from the northbound through/southbound-through phases on SH 83 to the eastbound through/westbound-through phases on Walker/Highway 105), all individual turning movements would operate at LOS D or better during the short-term school PM peak hour with the addition of site-generated traffic.

With the addition of a second westbound through approach lane, the westbound departure leg would need to be expanded to provide two receiving lanes. Depending on the design (to be determined later), the eastbound approach laneage, and possibly the westbound left-turn lane and east-leg departure lane may need adjustment/realignment.

Long-Term

As shown in Figure 10, all individual turning movements at this intersection are projected to operate at LOS D or better during all long-term peak hours with 1 westbound-through lane, 1 westbound-through/right lane, 1 westbound-left lane, 2 eastbound-through lanes, and minor signal timing modifications.

Jane Lundeen Drive/Proposed Tract A Middle Site Access

In response to County staff initial review comments, LSC has completed supplemental analysis of alternatives that would result in LOS to D or better at this access intersection.

The following options are shown to achieve this result:

- 1) Force an eastbound (exiting) right turn out of Tract A during school peak times, using traffic regulatory signage. The concept involves an “indirect left turn,” whereby exiting residents, after turning right instead of left onto Jane Lundeen, would drive south to the Pinehurst Roundabout and make a U turn to reverse direction and head north and proceed up to the Walker roundabout.
- 2) Reconstruct this intersection as a modern roundabout (if feasible).

These two options have been analyzed to determine if level of service could be improved at the middle site-access intersection on Jane Lundeen. See Table 5 which shows the specific alternatives analyzed.

The alternatives A, B, and C have been first analyzed assuming future approval of a deviation request for the north access (right-in/right-out) (which will be applied for later - at the subdivision stage of development rather than with this rezone application) Alternatives D, E, and F assume County-denial of a future deviation request for the north access (right-in/right-out).

Eastbound-left turns were assumed prohibited, in several alternatives, during both AM and school PM peak times using signage. Alternatives C and F present analysis of a roundabout at the middle site access.

Table 5: Summary of Alternative Intersections Configurations on Jane Lundeen Drive

Figure	Alternative	North Access	Middle Access	South Access
11	A	RIRO	TWSC, no EBL *	TWSC
11	B	RIRO	TWSC, no EBL *	TWSC, no EBL *
11	C	RIRO	Roundabout	TWSC, no EBL *
12	D	Delete	TWSC, no EBL *	TWSC
12	E	Delete	TWSC, no EBL *	TWSC, no EBL *
12	F	Delete	Roundabout	TWSC, no EBL *
* No EBL turns allowed during school peak times (using signage)				

Alternatives Assuming a Right-in/Right-out North Access

➤ Alternative A

Without any turn restrictions during school peak times, the eastbound approach at the south access would operate at LOS F during AM peak hour. All other turning movements and single-lane approaches at the study-area intersections along Jane Lundeen Drive would operate at LOS C or better using the laneage configurations described in alternative A. See Figure 11 for more details. As the LOS E is shown at the south access in this alternative, an Alternative B has been included to address this LOS below D.

➤ Alternative B

This alternative assumes eastbound-left turns would be restricted during school peak times at **both** the middle and south accesses. All turning movements and single-lane approaches at all study-area intersections along Jane Lundeen Drive would operate at LOS C or better using the laneage configurations described in alternative B. See Figure 11 for more details.

➤ Alternative C

This alternative presents analysis assuming a modern roundabout instead of TWSC at the **middle** site access. Note: this alternative also assumes eastbound-left turns restricted during school peak times at the **south** accesses. All turning movements and single-lane approaches at all study-area intersections along Jane Lundeen Drive would operate at LOS C or better using the laneage configurations described in alternative B. See Figure 11 for more details.

Alternatives Assuming No North Access

Alternatives in this scenario assume the absence of the north (RIRO) access, presumably due to subsequent denial of a required deviation that will be requested later. This scenario reflects a shift of most trips otherwise assigned to the north RIRO access in the preferred scenario (**with** this access) to the middle access.

➤ Alternative D

All turning movements and single-lane approaches at the study-area intersections along Jane Lundeen Drive would operate at LOS C or better using the laneage configurations described in alternative D, except the eastbound approach at the south access (analysis shows LOS E during AM peak hour). See Figure 12 for more details. As LOS E is shown at the south access in this alternative, an Alternative E has been included to address this LOS-below-D condition.

➤ Alternative E

For this alternative, eastbound-left turns were assumed restricted during school peak times at both the middle and south accesses. All turning movements and single-lane approaches at all study-area intersections along Jane Lundeen Drive would operate at LOS C or better using the laneage configurations described in alternative E. See Figure 12 for more details.

➤ Alternative F

This alternative assumes a modern roundabout instead of TWSC at the middle site access. Note: this alternative also assumes eastbound-left turns restricted during school peak times at the **south** accesses. All turning movements and single-lane approaches at all study-area intersections along Jane Lundeen Drive would operate at LOS C or better using the laneage configurations described in alternative F. See Figure 12 for more details.

Other Alternatives

As the projected levels of service are primarily due to the sharp peak periods of the adjacent school traffic, potential measures that could be taken by the school to reduce Tract A access delay and potentially result in better LOS without the need to implement the above-described alternatives include:

- Further staggering of school start and end times
- Metering of the parent drop-off/pick-up traffic at the egress point from the school parking lot/pick-up/drop-off loop to create frequent gaps in the traffic stream on northbound Jane Lundeen Drive

Potentially, coordinating these gaps with the traffic signal phases at SH 83 (which somewhat affects the **entering** school traffic stream on **southbound** Jane Lundeen Drive) could improve the effectiveness of this strategy.

VEHICLE QUEUEING ANALYSIS

A SimTraffic queueing analysis was performed to estimate the maximum and 95th-percentile queues at the intersection of **SH 83/Highway 105/Walker Road** during the morning, school-PM, and afternoon peak hours.

“Upstream block time” represents the percent of time during the peak hour in which the entry point for a turn lane upstream of the subject intersection is blocked by a queue in the adjacent through lane. “Storage block time” is the proportion of time in which the turn lane’s queue exceeds the available storage length and left-turning vehicles overspill the turn lane in the model and into the adjacent through lane.

“Maximum queue” represents the maximum queue length observed for each individual lane during the 15-minute analysis period. SimTraffic records the maximum back of queue observed

for every two-minute period. In SimTraffic, a vehicle is considered queued whenever it is behind another vehicle traveling at less than 10 feet/second (approximately 7 mph) or at a stop bar. The maximum observed queue may not occur during the same interval in which the highest upstream block time (percent) or storage block time (percent) occurs. SimTraffic reports have reported the highest value for each metric for each turn lane/approach, regardless of whether or not they occur in the same 15-minute interval.

Reported queue length for auxiliary turn lanes in SimTraffic is generally limited by the turn-lane length. SimTraffic simply reports the maximum observed queue length during simulations. The reported 95th-percentile queue is also part of the results.

Analysis has been run to estimate the queue length that the westbound approach at SH 83/Highway 105/Walker Road will extend back through the roundabout at Jane Lundeen Drive. There are about 580 feet between the stop line on the westbound approach on Walker Road and the west circulating lane within the Walker/Jane Lundeen roundabout. Queues less than 580 feet would not extend back into the roundabout.

Existing Conditions

As discussed above in the “Existing Conditions” section, queue backups on the westbound approach at Walker/SH 83 were observed during May 2025 data collection (morning peak hour). Queues were observed backing into the outermost circulating lane, but not the inner circulating lane around the north side of the circle which resulted in an “upstream” queue on the Jane Lundeen northbound approach in the outside (No. 2) entry/approach lane. The queues did not appear to block the eastbound departure lane on the east leg as most drivers on the northbound approach paused at the yield line to avoid blocking eastbound “straight-through” traffic.

Short Term – Existing Laneage with Existing Signal Timings

Results from the SimTraffic simulations indicate that all queues on the eastbound and westbound approaches at the signalized intersection of SH 83/Highway 105/Walker Road would be accommodated during most short-term peak periods with the addition of site-generated traffic. Minor upstream block times or storage block times were reported for the westbound approach during the short-term AM peak hour, with 95th-percentile queues exceeding available stacking for the existing westbound-left and westbound-through/right-turn lanes. Queues in this approach would block vehicles from entering the westbound-left and westbound-through/right-turn lanes approximately 13 and 17 percent of the time during the busiest 15-minute interval of the school AM peak hour, respectively. Otherwise, storage block time would be minimal (0-2 percent storage block times during the remainder of the school PM peak hour). Constructing a second westbound-through lane would be required to alleviate queue spillback during the short term.

Long Term – Recommended Laneage (with Modified Signal Timings)

The following queuing analysis results assume the following modifications would be made to the existing laneage on Walker Road and Highway 105 approaching SH 83, assuming minor signal-timing modifications would be implemented:

- 1 westbound-left turn lane (current condition)
- 2 westbound-through turn lanes
- 2 eastbound-through turn lanes

Westbound Approach

Results from the SimTraffic simulations indicate that westbound queue spillback extending back on Walker Road between SH 83 and the roundabout at Jane Lundeen Drive would be mitigated during all peak hours with the recommended intersection approach-lane modifications shown in Figure 10. No upstream block times or storage block times were reported for the westbound approach during the long term.

Eastbound Approach

Results from the SimTraffic simulations indicate that westbound queues extending back on Highway 105 east of SH 83 would be mitigated during all peak hours with the recommended turn-lane and minor signal timing modifications shown in Figure 10.

STREET CLASSIFICATIONS

Road classifications for major roadways are shown on the 2045 Roadway Plan in the County *MTCP*. Also, *ECM* Tables 2-4 through 2-7 list design average daily traffic (ADT) thresholds for roadway functional classifications. Determination of functional classification is based on several factors.

Please refer to Figure 13 for a summary of proposed roadway classifications for roadways in the study area with the addition of site-generated traffic.

Walker Road

The long-term projected ADT on Walker Road between SH 83 and Jane Lundeen Drive is 9,898 vpd. Figure 22 of El Paso County's *Major Transportation Corridors Plan (MTCP)* shows Walker Road as a **Rural Major Collector**. However, in the vicinity of the Jane Lundeen roundabout and between the SH 83 and Jane Lundeen intersection, Walker should be treated as "Urban" because the roadway is built with curb and gutter. If this segment of Walker is considered an "Urban Non-Residential Collector" through this section, the projected volumes will not exceed the associated 20,000 VPD max ADT.

Jane Lundeen Drive

The long-term projected ADT on Jane Lundeen Drive south of the roundabout at Walker Road is 3,159 vpd. As such, the projected buildout/20-year volume on Jane Lundeen Drive will not exceed the design ADT of 20,000 vpd for an Urban Non-Residential Collector.

Tract A (Preliminary)

Based on projected ADTs shown on Figure 10, and other considerations, the proposed entry/access roads for Tract A would likely be classified as follows:

- Tract A north site access drive – private access drive or possibly Urban Local
- Tract A middle site access street/drive– Urban Local, potentially a private street.
- Tract A south site access street/drive – Urban Local, potentially a private street.

Tract B

The proposed subdivision roads within Tract B will likely be classified as “Urban Local or Local (Low Volume).”

ROADWAY IMPROVEMENTS

MTCP-Identified Roadway Improvements

State whether the MTCP or other approved corridor study calls for the construction of improvements in the immediate area.

The following roadway improvement projects within the immediate area/study area have been identified as being needed by the year 2045 per Figure 27 of El Paso County’s 2024 MTCP. A copy of the 2045 MTCP is [here](#).

Highway 105 (Project # 508)

The segment of Highway 105 from Martingale Road to SH 83 is planned to be improved to a 2-lane Rural Principal Arterial by 2045. Previous LSC studies have shown four intersection-approach through lanes at the SH 83 intersection during long-term analysis. In order to achieve acceptable LOS at the SH 83/Highway 105/Walker Road intersection, the eastbound and westbound approaches would need 2 through lanes during the long term. The westbound departure leg would need two receiving lanes.

Walker Road (Project # 154)

The segment of Walker Road from SH 83 to Stepler Road is shown as a 2-lane Rural Major Collector on the 2045 Roadway Plan. In order to achieve acceptable LOS at the SH 83/Highway

105/Walker Road intersection, Highway 105 would need 2 through lanes per direction during the long term. Note: As Walker Road has already been upgraded in the vicinity of the Jane Lundeen roundabout and between the SH 83 and Jane Lundeen intersection, Walker should be treated as “Urban” because the roadway is built with curb and gutter. In order to achieve acceptable LOS at the SH 83/Highway 105/Walker Road intersection, the eastbound and westbound approaches would need 2 through lanes during the long term. The westbound departure leg would need to be expanded to provide two receiving lanes.

ECM Requirements for Auxiliary Turn Lanes

Appendix B.8 List ECM criteria for stacking, storage, and taper for every affected auxiliary lane and access and state whether this access can be met. If it cannot be met, state the required modifications so that it can be met.

Left-Turn Deceleration Lanes

According to the El Paso County *Engineering Criteria Manual (ECM)*, exclusive left-turn lanes shall be provided for any access on “Minor Arterials and lower classifications” with a projected peak-hour ingress turning volume of 25 vehicles per hour (vph) or greater.

Right-Turn Deceleration Lane

Per Section 2.3.7.D.1 of the *ECM* for Minor Arterials and lower classifications, exclusive right-turn lanes shall be provided for any access with a projected peak-hour ingress turning volume of 50 vehicles per hour (vph) or greater.

Right-Turn Acceleration Lanes

Right-turn acceleration lanes are generally not required on Minor Arterials and lower classifications roadways, per Section 2.3.7.D.2 of the *ECM*.

Auxiliary-Turn-Lane Needs Evaluation and Recommendations

Tract A – North Site Access (RIRO)

Left turns would not be permitted into or out of the site, as the proposed north site access on Jane Lundeen Drive would be restricted to right-in/right-out movement.

The projected southbound-right turn volume at this intersection is not projected to exceed the 50-vph minimum right-turn volume thresholds prescribing a turn lane outlined in the *ECM* upon site buildout. As such, a southbound-right deceleration lane would **not** be required on Jane Lundeen Drive approaching this proposed site access.

Tract A – Middle Site Access (Full-Movement)

Fewer than 25 vehicles are projected to turn northbound-left from Jane Lundeen Drive onto the middle site access. As such, a northbound-left deceleration lane would **not** be required.

Fewer than 50 vehicles are projected to turn southbound-right from Jane Lundeen Drive onto the middle site access. As such, a southbound-right deceleration lane would **not** be required.

Tract A – South Site Access (Full-Movement)

Fewer than 25 vehicles are projected to turn northbound-left from Jane Lundeen Drive onto the south site access. As such, a northbound-left deceleration lane would **not** be required.

Fewer than 50 vehicles are projected to turn southbound-right from Jane Lundeen onto the south site access. As such, a southbound-right deceleration lane would **not** be required.

Tract A – Southwest Site Access (Left-In Only)

Greater than 25 vehicles are projected to turn northbound-left from Jane Lundeen Drive onto the south site access. As such, the *ECM* prescribes a 325-foot eastbound-left deceleration lane would be required (based on criteria for a 35-mph design speed):

- 135 feet of full-width lane
- 140-foot approach taper
- 50 feet of storage length

Please refer to the deviation request included with this submittal, which addresses the **potential** request to waive this turn-lane requirement at the site-development or platting stage based on unique site-specific conditions.

Right turns would not be permitted into or out of the site, as the proposed southwest site access on Pinehurst Circle would be restricted to left-in movement only.

Tract B – West Site Access (Roundabout)

Currently, the intersection of Jane Lundeen Drive/Pinehurst Circle is a 3-leg roundabout. A new south leg (northbound approach) will be constructed with Tract B development. All approaches would be single-lane approaches once the fourth leg is added to this intersection.

Tract B – East Site Access (Full-Movement)

Fewer than 25 vehicles are projected to turn westbound-left from Pinehurst Circle onto the east site access. As such, a westbound-left deceleration lane would **not** be required.

Fewer than 50 vehicles are projected to turn eastbound-right from Pinehurst Circle onto the east site access. As such, an eastbound-right deceleration lane would **not** be required.

The specific location of this access is anticipated to be 150 feet southeast of the school access. Necessary analysis of this access location and associated PUD/design level details are in-progress. Once completed, these details will be addressed in a TIS Supplement to follow this report.

State Highway 83/Highway 105/Walker Road

The only laneage modifications or signal-timing adjustments that would be required during the short term to ensure that short-term LOS and queues would both be acceptable is constructing a second westbound-through turn lane. The westbound departure leg would need two receiving lanes. Constructing a second westbound-through lane would be required to mitigate the existing and projected short-term side-street levels of service and alleviate queue spillback into the roundabout during the short term. While these are **existing deficiencies** (primarily the effect of to peak school traffic volumes), this development or potentially other nearby developments if occurring ahead of these developments, would likely be responsible for constructing these improvements (or depending on the relative impact of individual development projects, possibly escrowing funds as fair share participation toward later completion of them). This will likely be determined with the CDOT access permit process (which would occur at the subdivision stage or site-development phase of the EPC process)

Note: While the applicant cannot control or dictate school schedules or operations, it is notable that staggering of school start times to spread out school-peak-period traffic demand could potentially have a significant effect and improve level of service/reduce queuing.

If the intersection of SH 83/Highway 105/Walker Road were to remain signalized during the long term, the following laneage modifications would be required in order for LOS to operate at an acceptable level and for queues to be mitigated (based on existing signal timings):

- Construct a second westbound-through turn lane
- Construct a second eastbound-through turn lane
- The eastbound and westbound departure legs would need two receiving lanes. On the east leg, the widening to two through lanes would only be needed between the intersection and the point at which there are already two lanes on the approach to the Walker/Jane Lundeen roundabout.

The level of service section included evaluation of this intersection as a modern roundabout. The above findings and recommendations for auxiliary turn lanes would change for a roundabout.

This project may be subject to “cost recovery” for future improvements at this intersection if constructed by other developments **and/or** CDOT may require pro-rata share participation in future improvements (potentially in the form of an escrow). Also, there is the potential that intersection improvements, although within CDOT ROW, may be added to the list of “eligible

improvements” under the EPC Roadway Improvement Fee Program. These improvements may include new or improved auxiliary turn lanes, traffic-control upgrades/change (roundabout), etc. This could be addressed at the Preliminary Plan/Platting stage.

TRACT A AND B ROADWAY CLASSIFICATIONS

Tract A streets will also likely be Urban Local or Local (Low Volume). This can be confirmed at the Preliminary Plan/Platting stage. The classification the Tract B internal roadways will be Urban Local or Local (Low Volume).

COUNTY ROAD IMPROVEMENT FEE PROGRAM

Transportation Impact Fees

This development would be required to participate in the Roadway Improvement Fee Program. Estimates of fees would be included at the plat stage.

MULTI-MODAL TRANSPORTATION AND TDM OPPORTUNITIES

No multi-modal transportation improvement projects have been identified as being needed by the year 2045 per Figure 27 of El Paso County’s 2024 *MTCP*.

DEVIATIONS

The proposed north right-in/right out access point to Jane Lundeen and the south left-in-only access to Tract A from Pinehurst Circle will be subject to approval of deviations. Also, the spacing of the proposed south full-movement shown approximately 317 feet north of Pinehurst/Jane Lundeen intersection will also be subject to approval of a deviation.

These deviations will be applied for later - at the subdivision stage of development rather than with this rezone application.

FINDINGS AND CONCLUSIONS

- Tract A is projected to generate about:
 - Average weekday – 940 new driveway vehicle-trips (half entering, half exiting)
 - AM peak hour – 21 entering vehicles and 62 exiting vehicles
 - School-PM peak hour – 34 entering vehicles and 29 exiting vehicles
 - PM peak hour – 47 entering vehicles and 32 exiting vehicles
- Tract B is projected to generate about:
 - Average weekday – 293 new driveway vehicle-trips (half entering, half exiting)
 - AM peak hour – 6 entering vehicles and 15 exiting vehicles
 - School-PM peak hour – 14 entering vehicles and 9 exiting vehicles
 - PM peak hour – 17 entering vehicles and 10 exiting vehicles

- Please refer to the “Level of Service” section above for analysis of existing conditions, and short- and long-term projected conditions. The levels of service analysis for Walker Road/SH 83/Highway 105 includes results based on current laneage/traffic control and with recommended lane improvements.
- Please refer to the “Queuing Analysis” section above for more details.
- No auxiliary turn lanes would be required at any of the proposed site access intersections, with the possible exception of the Tract A Left-In only access. Please refer to the “Auxiliary Turn-Lane Analysis” section for evaluation details.
- Upgrades with additional east/west (side street) laneage are projected to be needed to improve levels of service and address queuing during the school peak parent drop off and pick up times. An alternative could include replacing the signalized intersection with a modern roundabout. Also note: although the applicant cannot control or dictate school schedules or operations, it is notable that staggering of school start times to spread out school-peak-period traffic demand could potentially have a significant effect and improve level of service/reduce queuing.

* * * * *

Please contact me if you have any questions regarding this report.

Sincerely,

LSC TRANSPORTATION CONSULTANTS, INC.

By Jeffrey C. Hodsdon, P.E.
Principal

JCH/JAB:jas

Enclosures: Table 3
Figure 1 - Figure 13
Traffic Count Reports
Synchro LOS Reports
Sidra LOS Reports
Queue Reports

Table 3


Table 3: Detailed Trip Generation Estimate


ITE Land Uses				Trip Generation Rates ²								Total Trips Generated							
				Average Weekday	A.M. Peak Hour		School P.M. Peak Hour		P.M. Peak Hour		Average Weekday ³	A.M. Peak Hour ⁴		School P.M. Peak Hour		P.M. Peak Hour ⁴			
					In	Out	In	Out	In	Out		In	Out	In	Out	In	Out		
Code	Description	Value	Units ¹																
Tract A - North Portion- - Proposed Zoning: RM-12																			
215	Single-Family (Attached) Housing	55	DU	6.55	0.17	0.50	0.20	0.21	0.30	0.22	360	9	28	11	12	16	12		
220	Multi-Family Housing (Low-Rise)	30	DU	6.55	0.11	0.34	0.23	0.19	0.33	0.20	196	3	10	7	6	10	6		
Total		85	DU							Total	557	12	38	18	17	26	18		
Tract A - South Portion - - Proposed Zoning: RS-5000																			
210	Single-Family (Detached) Housing	23	DU	10.11	0.19	0.52	0.48	0.30	0.58	0.36	233	4	12	11	7	13	8		
215	Single-Family (Attached) Housing	23	DU	6.55	0.17	0.50	0.20	0.21	0.30	0.22	151	4	12	5	5	7	5		
Total		46	DU							Total	383	8	24	16	12	20	13		
Tract B - Proposed Zoning: PUD																			
210	Single-Family (Detached) Housing	29	DU	10.11	0.19	0.52	0.48	0.30	0.58	0.36	293	6	15	14	9	17	10		
¹ DU = dwelling units																			
August 12, 2026																			

Figures 1-13



1" = 1,000'
scale

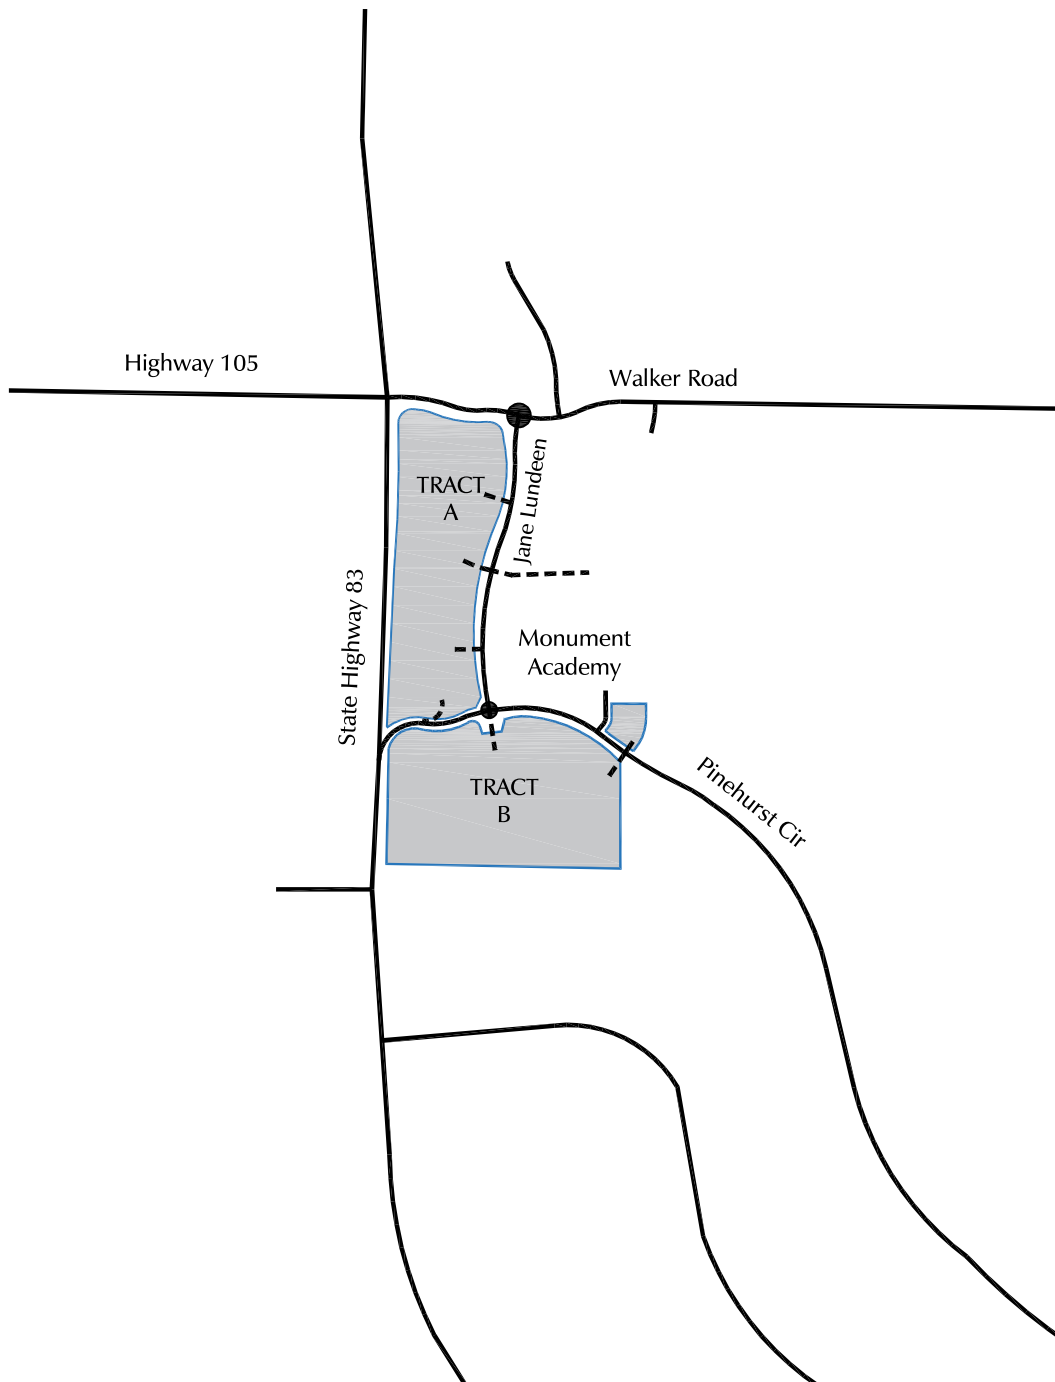

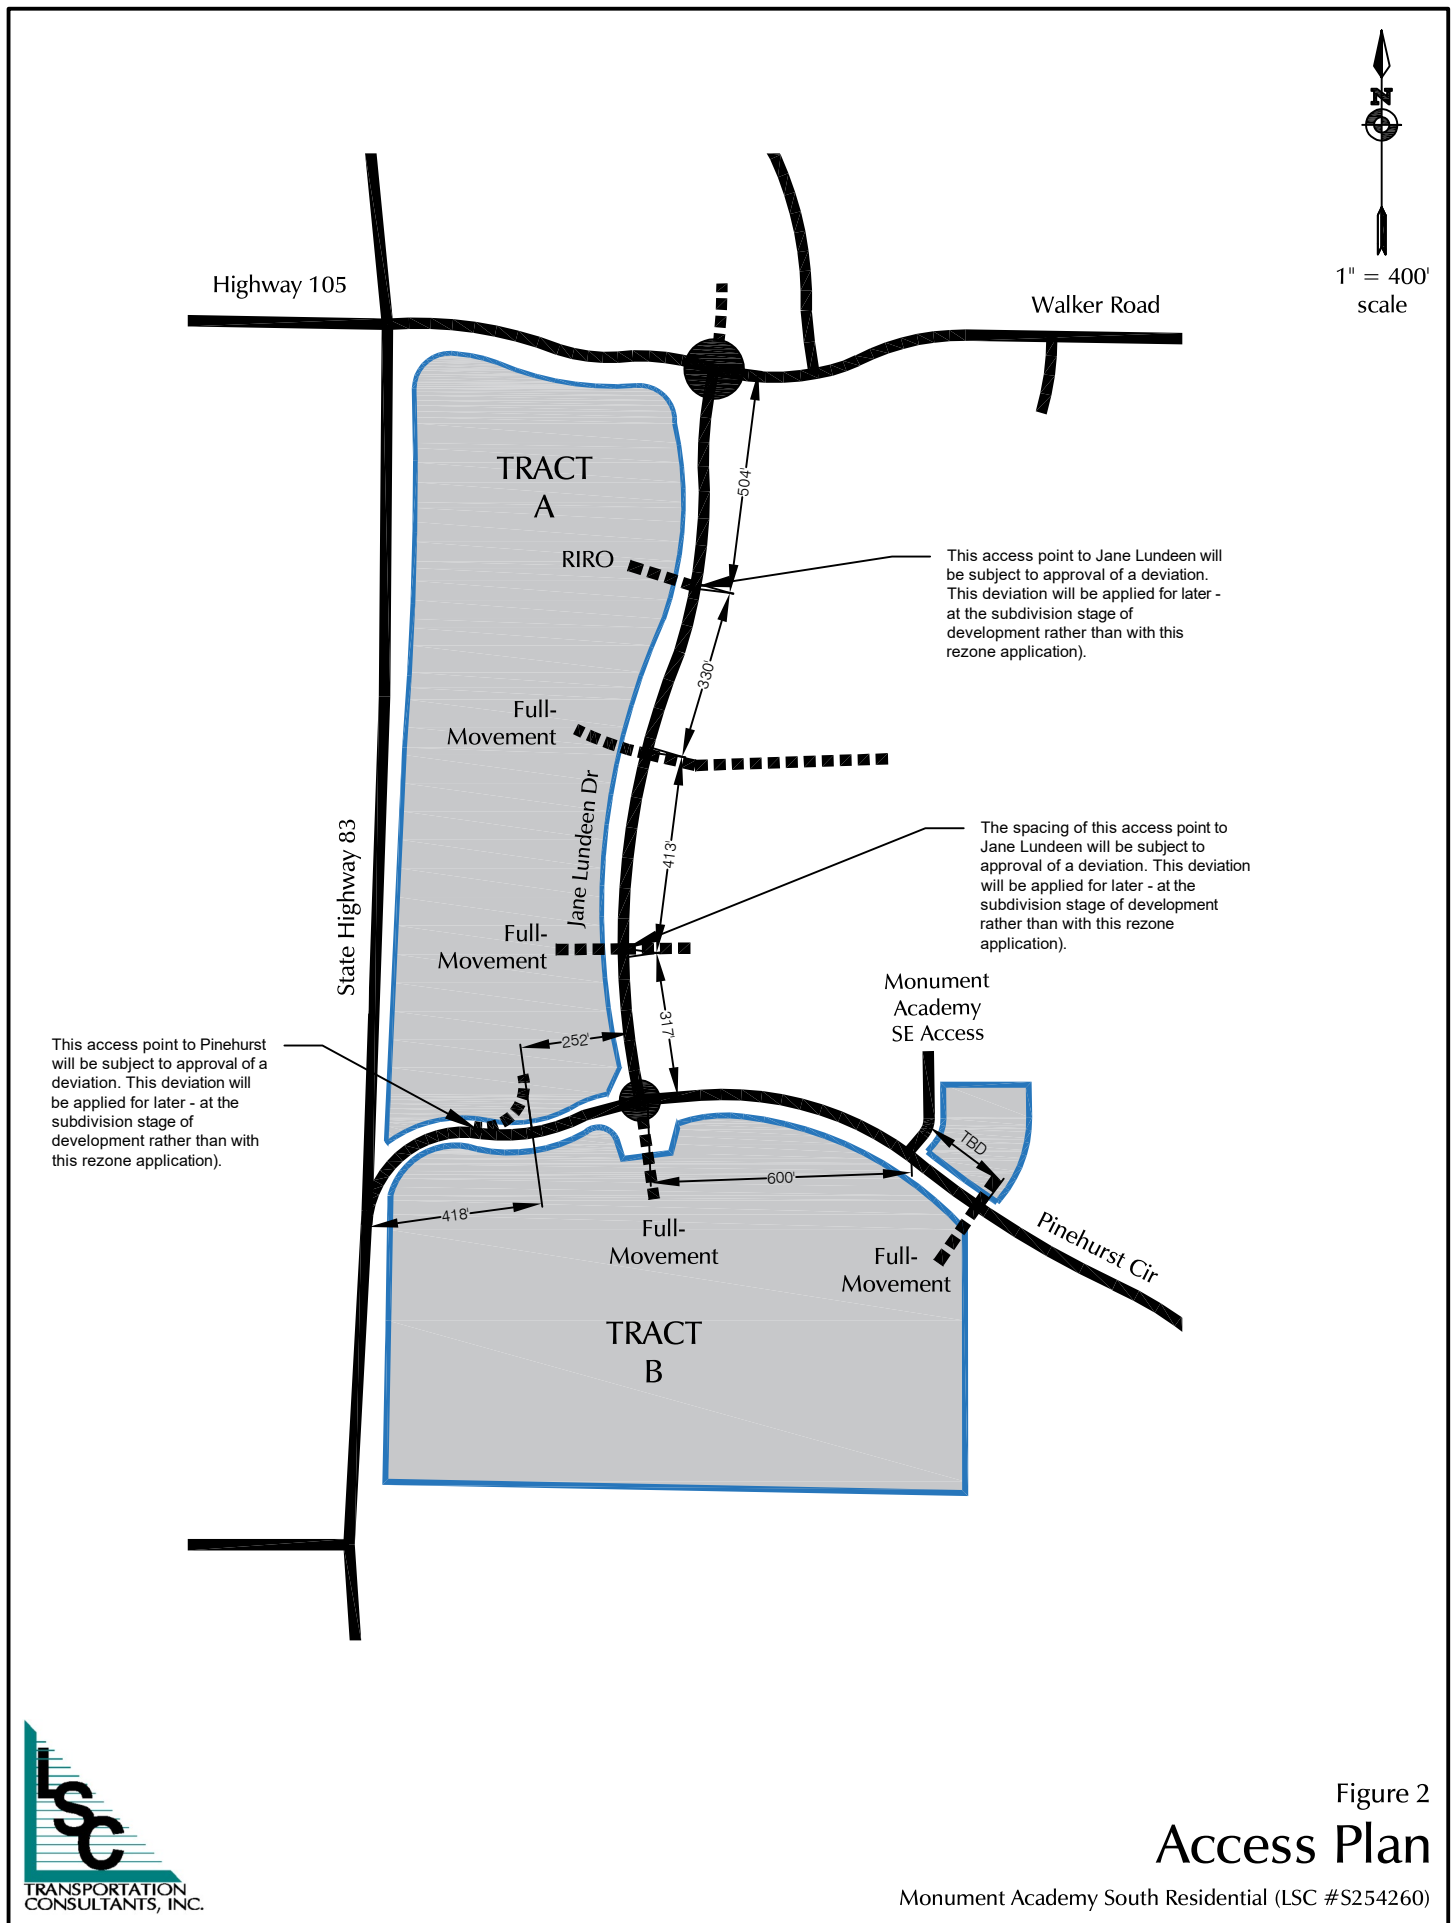


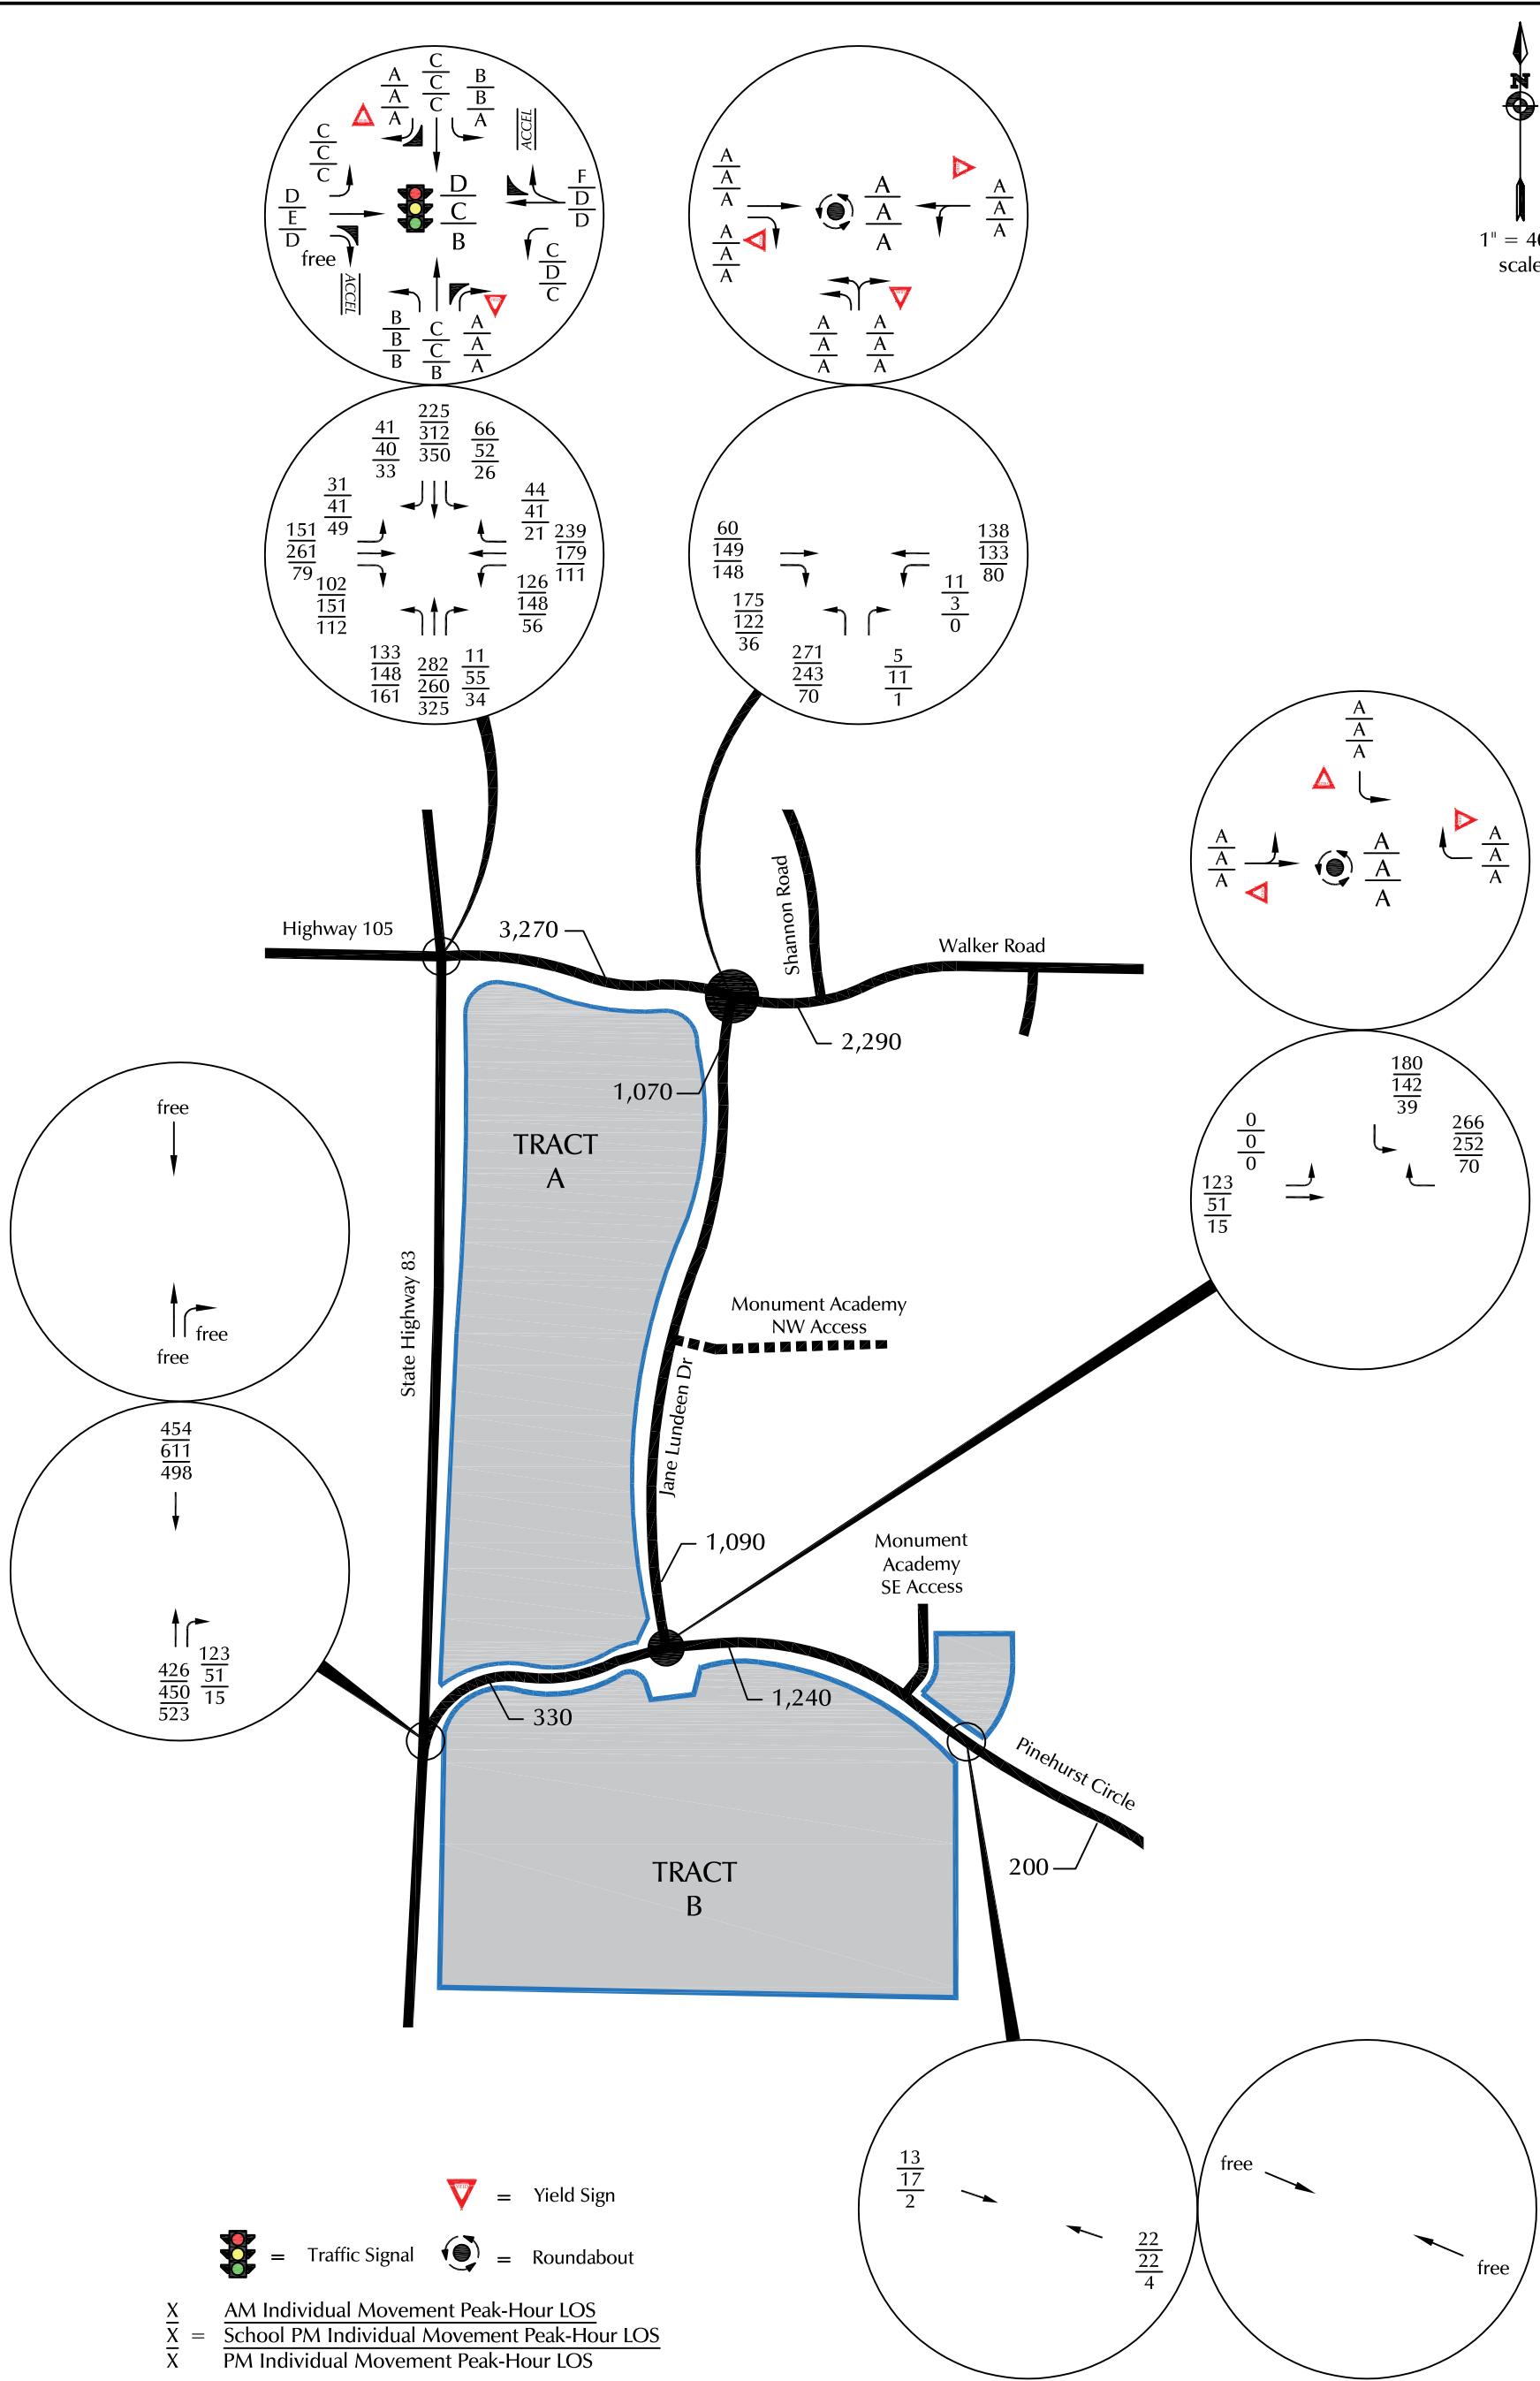


Figure 3

2025 Existing Traffic, Lane Geometry, Traffic Control, and LOS

Monument Academy South Residential (LSC #S254260)



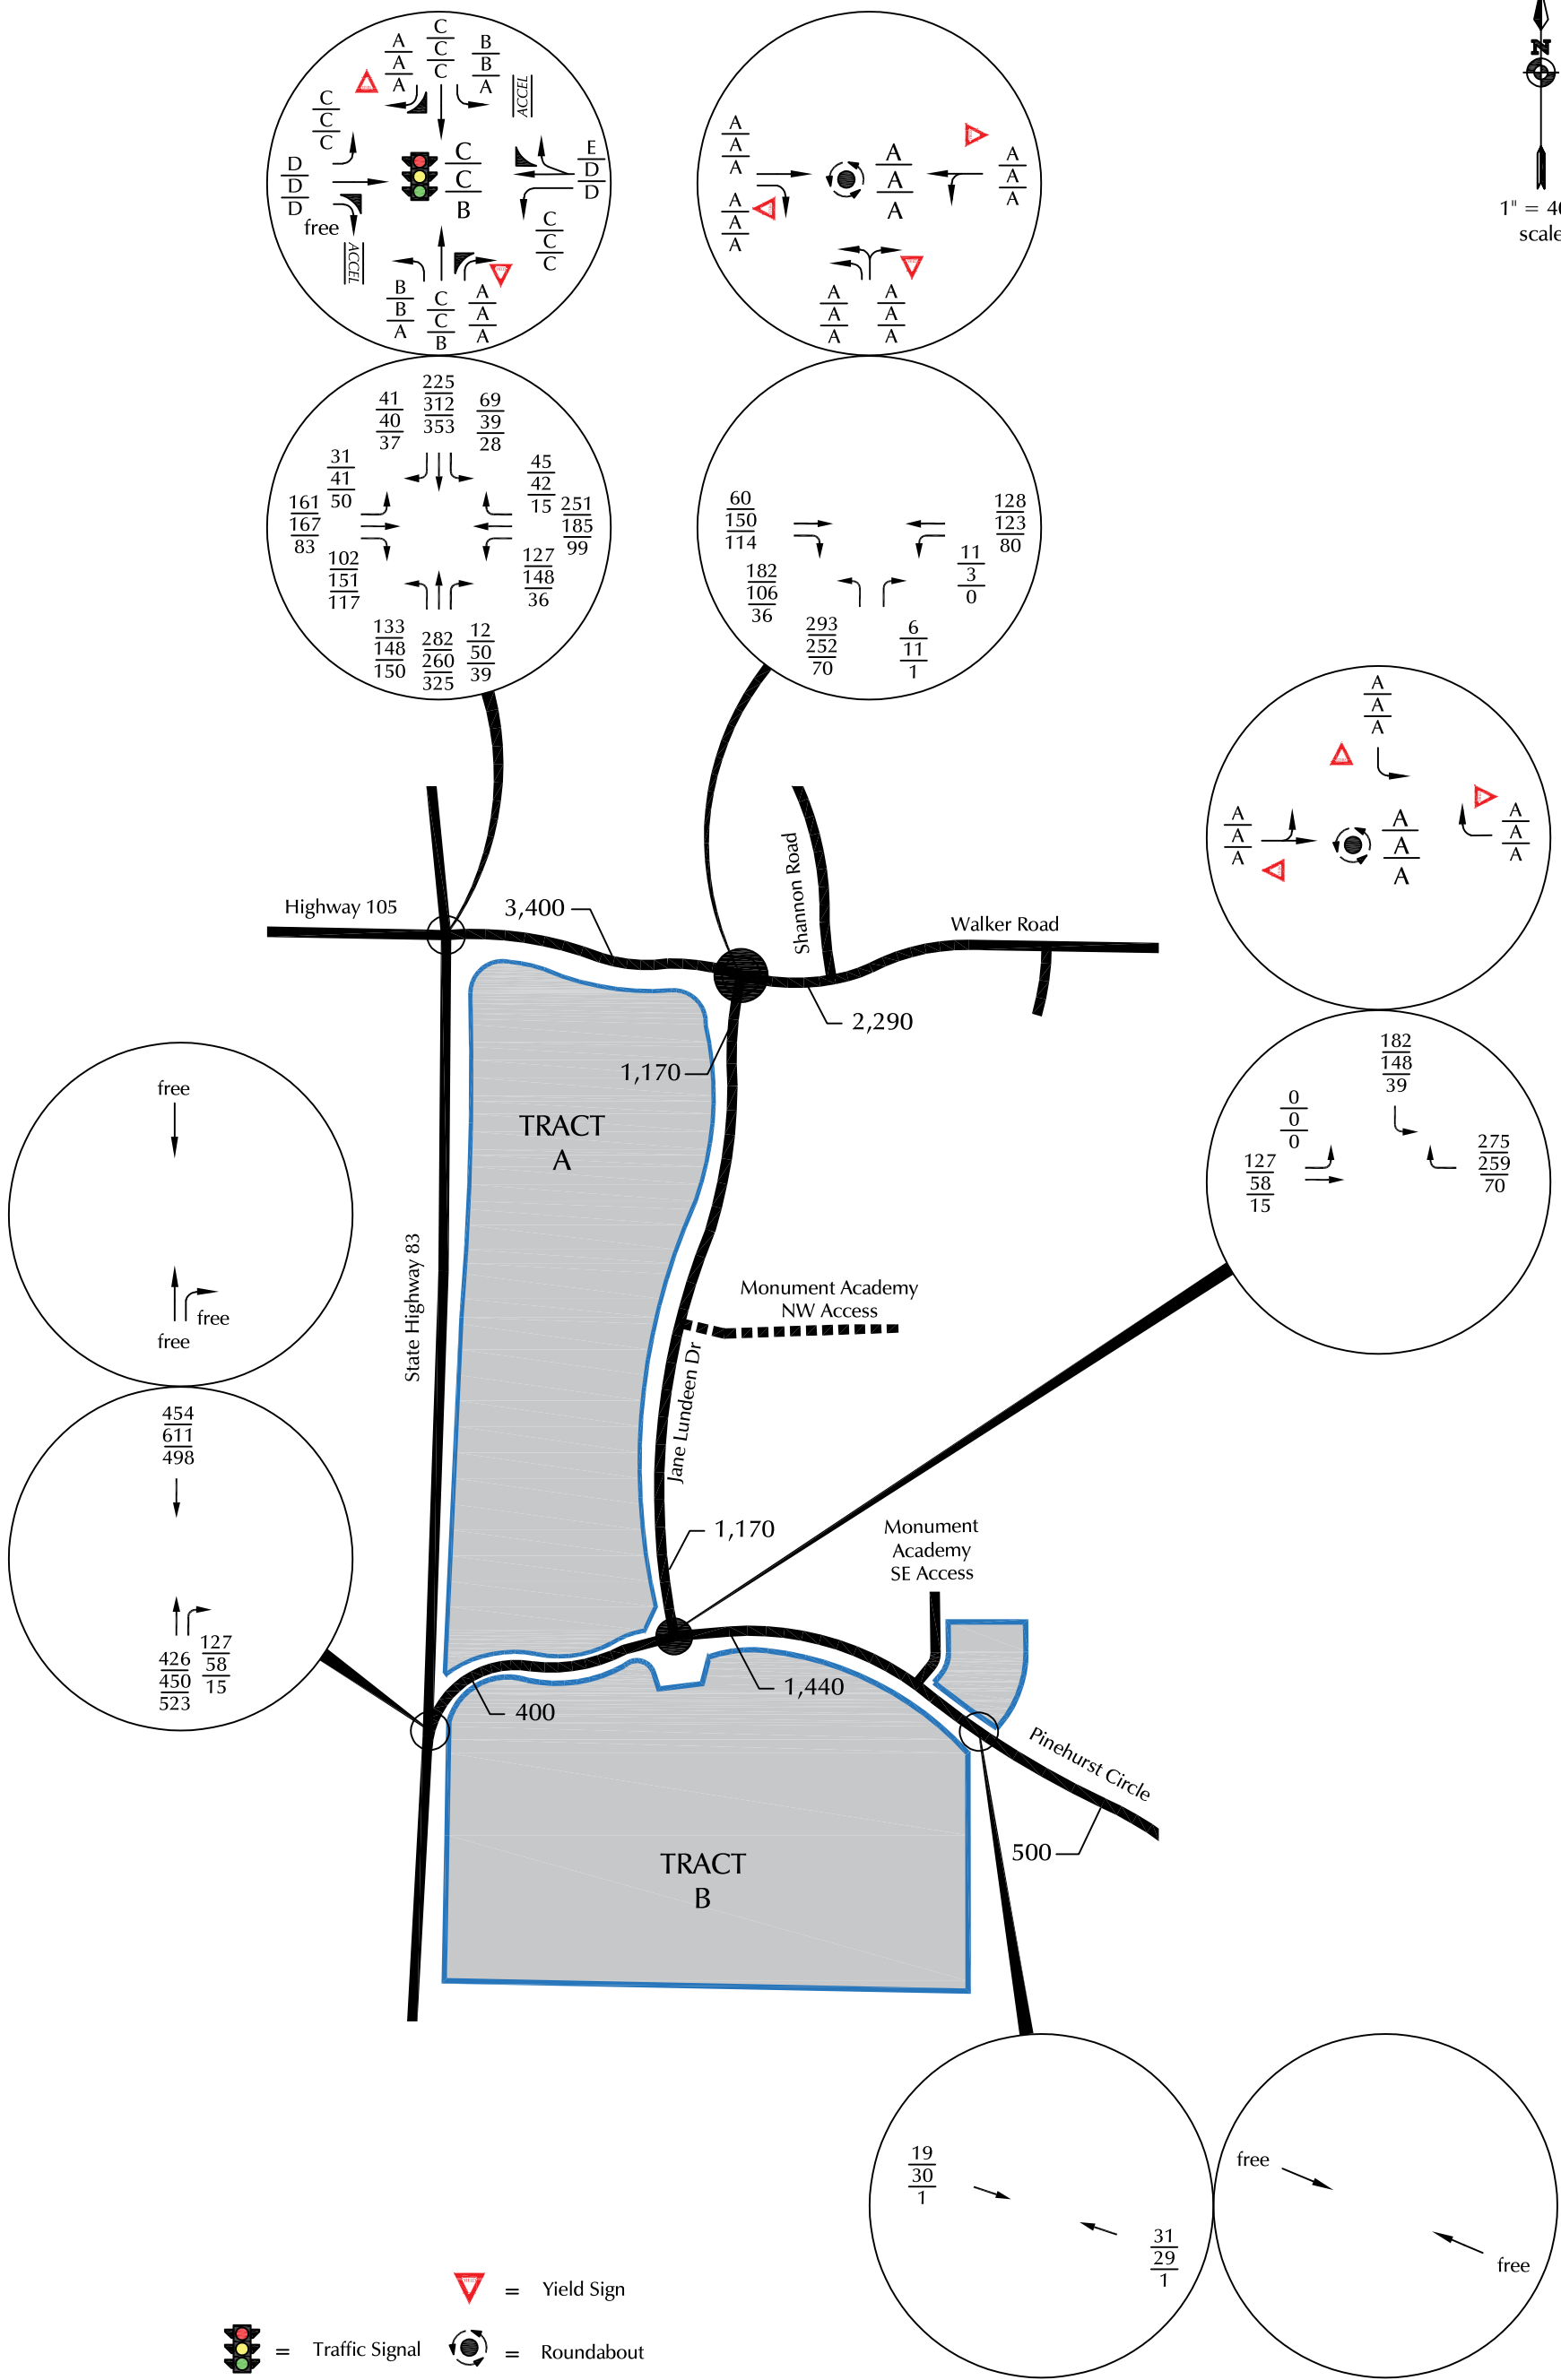

= Traffic Signal = Roundabout

= Yield Sign

$\frac{X}{X} = \frac{\text{AM Individual Movement Peak-Hour LOS}}{\text{School PM Individual Movement Peak-Hour LOS}}$


$\frac{X}{X} = \frac{\text{AM Weekday Peak-Hour Traffic (Vehicles/Hour)}}{\text{School PM Weekday Peak-Hour Traffic (Vehicles/Hour)}}$

$\frac{X}{X} = \frac{\text{PM Weekday Peak-Hour Traffic (Vehicles/Hour)}}{\text{PM Weekday Peak-Hour Traffic (Vehicles/Hour)}}$

X,XXX = Average Daily Traffic (Vehicles/Day)



Figure 4
2026 Baseline Traffic, Lane Geometry,
Traffic Control, and LOS
Monument Academy South Residential (LSC #S254260)

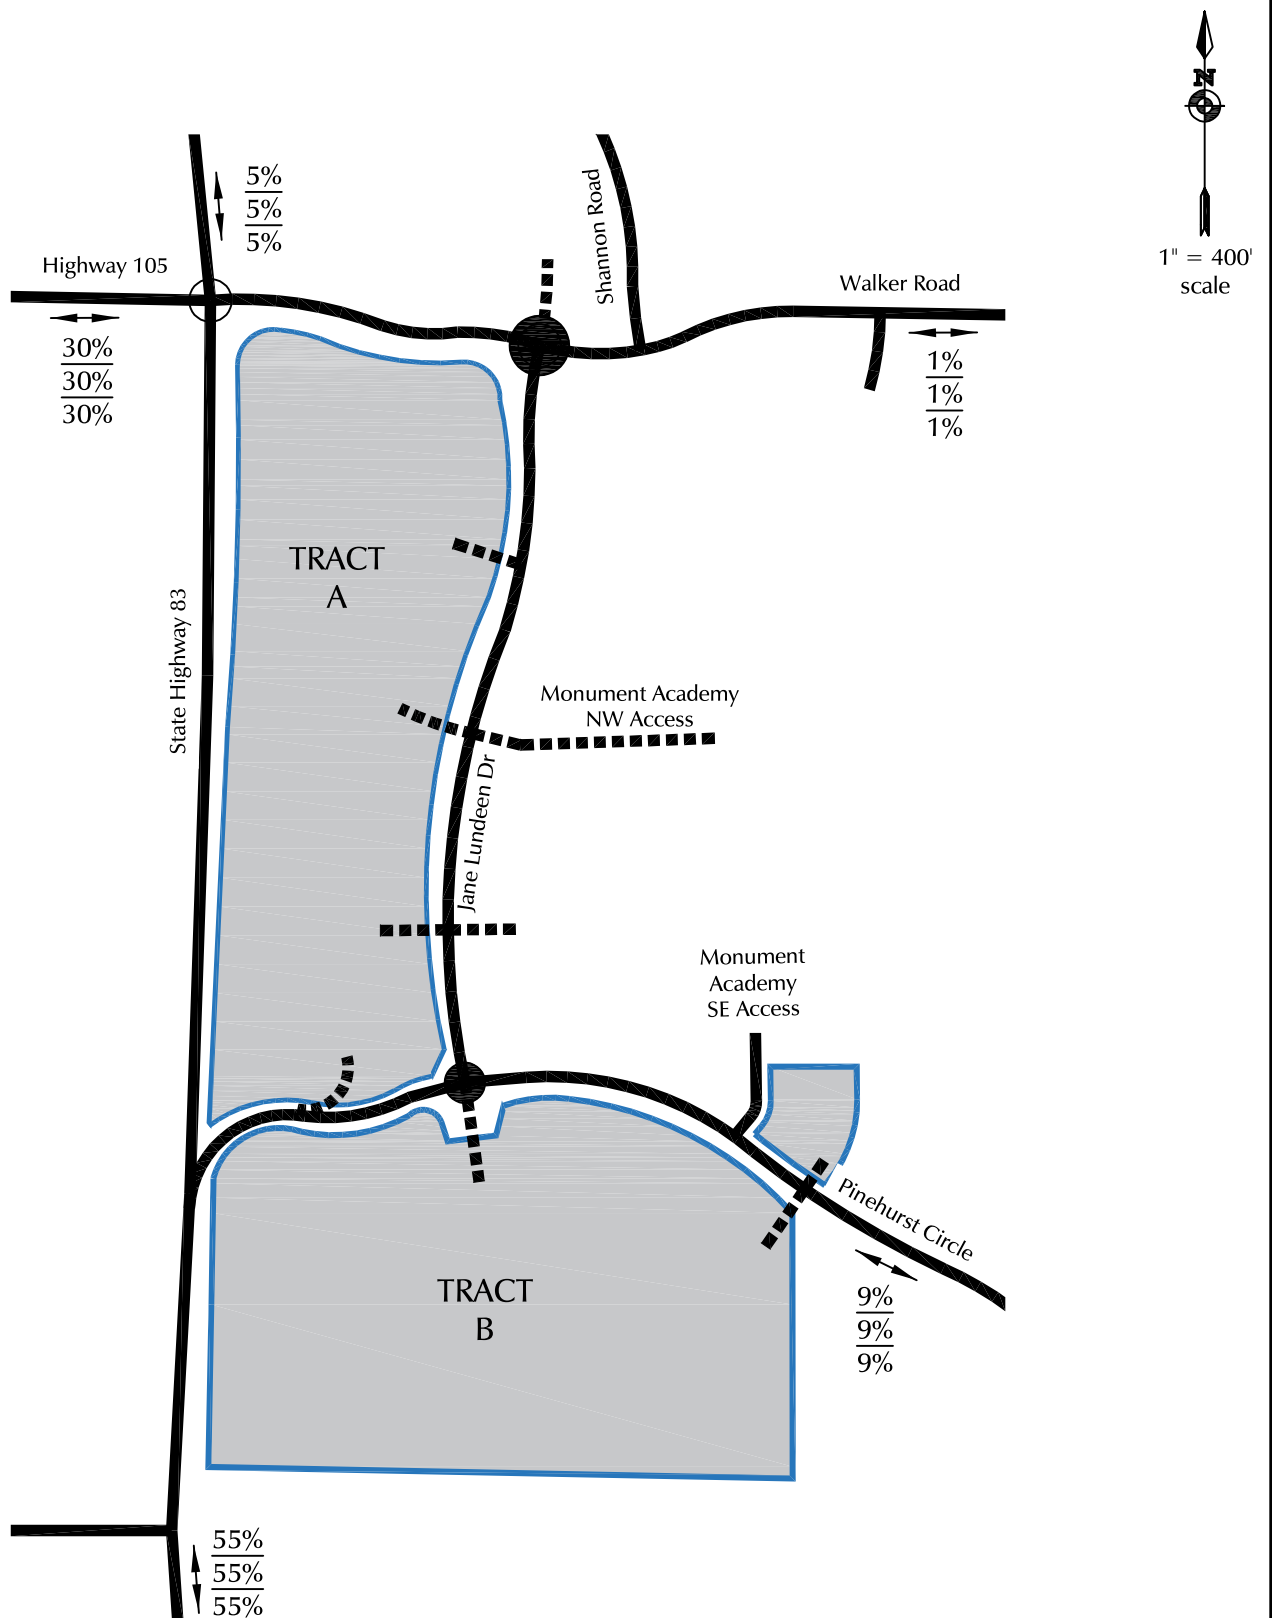



Estimated Direction Distribution of Site-Generated Vehicle Trips:


$$\frac{XX\%}{XX\%} = \frac{\text{A.M. Peak Hour \% of Site-Generated Trips}}{\text{School P.M. Peak Hour \% of Site-Generated Trips}}$$


$$\frac{XX\%}{XX\%} = \frac{\text{P.M. Peak Hour \% of Site-Generated Trips}}{\text{P.M. Peak Hour \% of Site-Generated Trips}}$$


Figure 5
**Directional
Distribution**

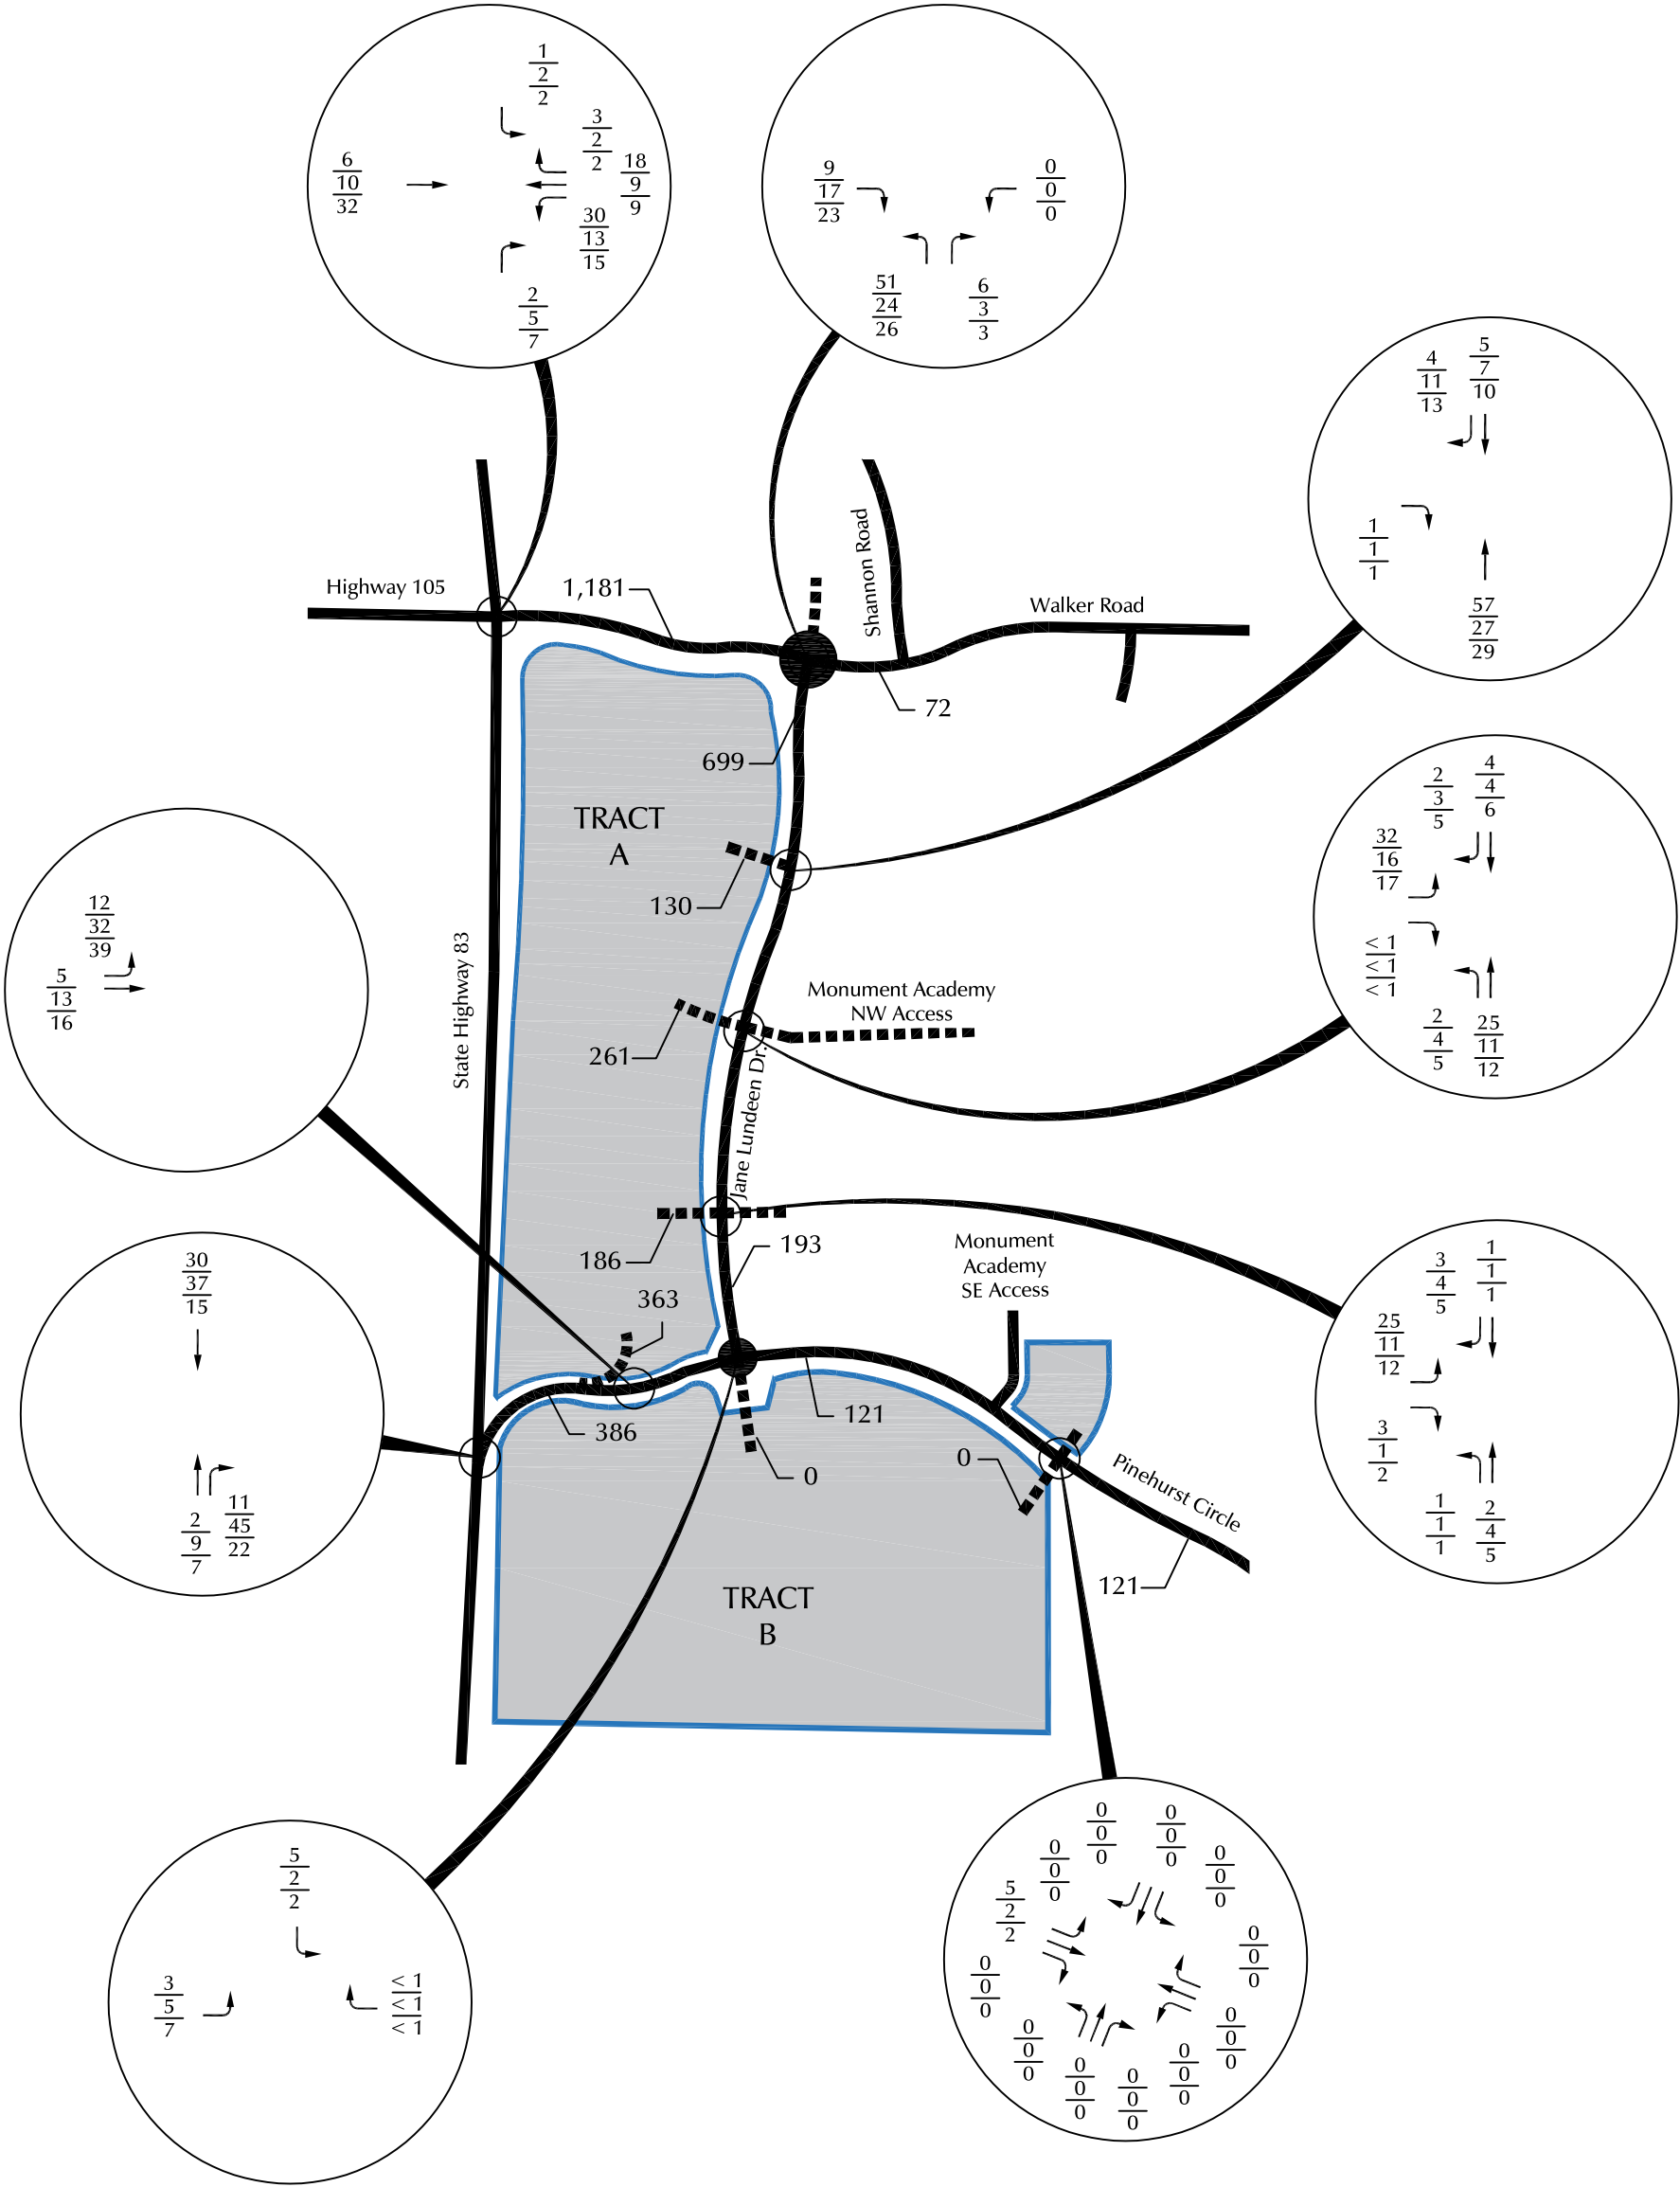

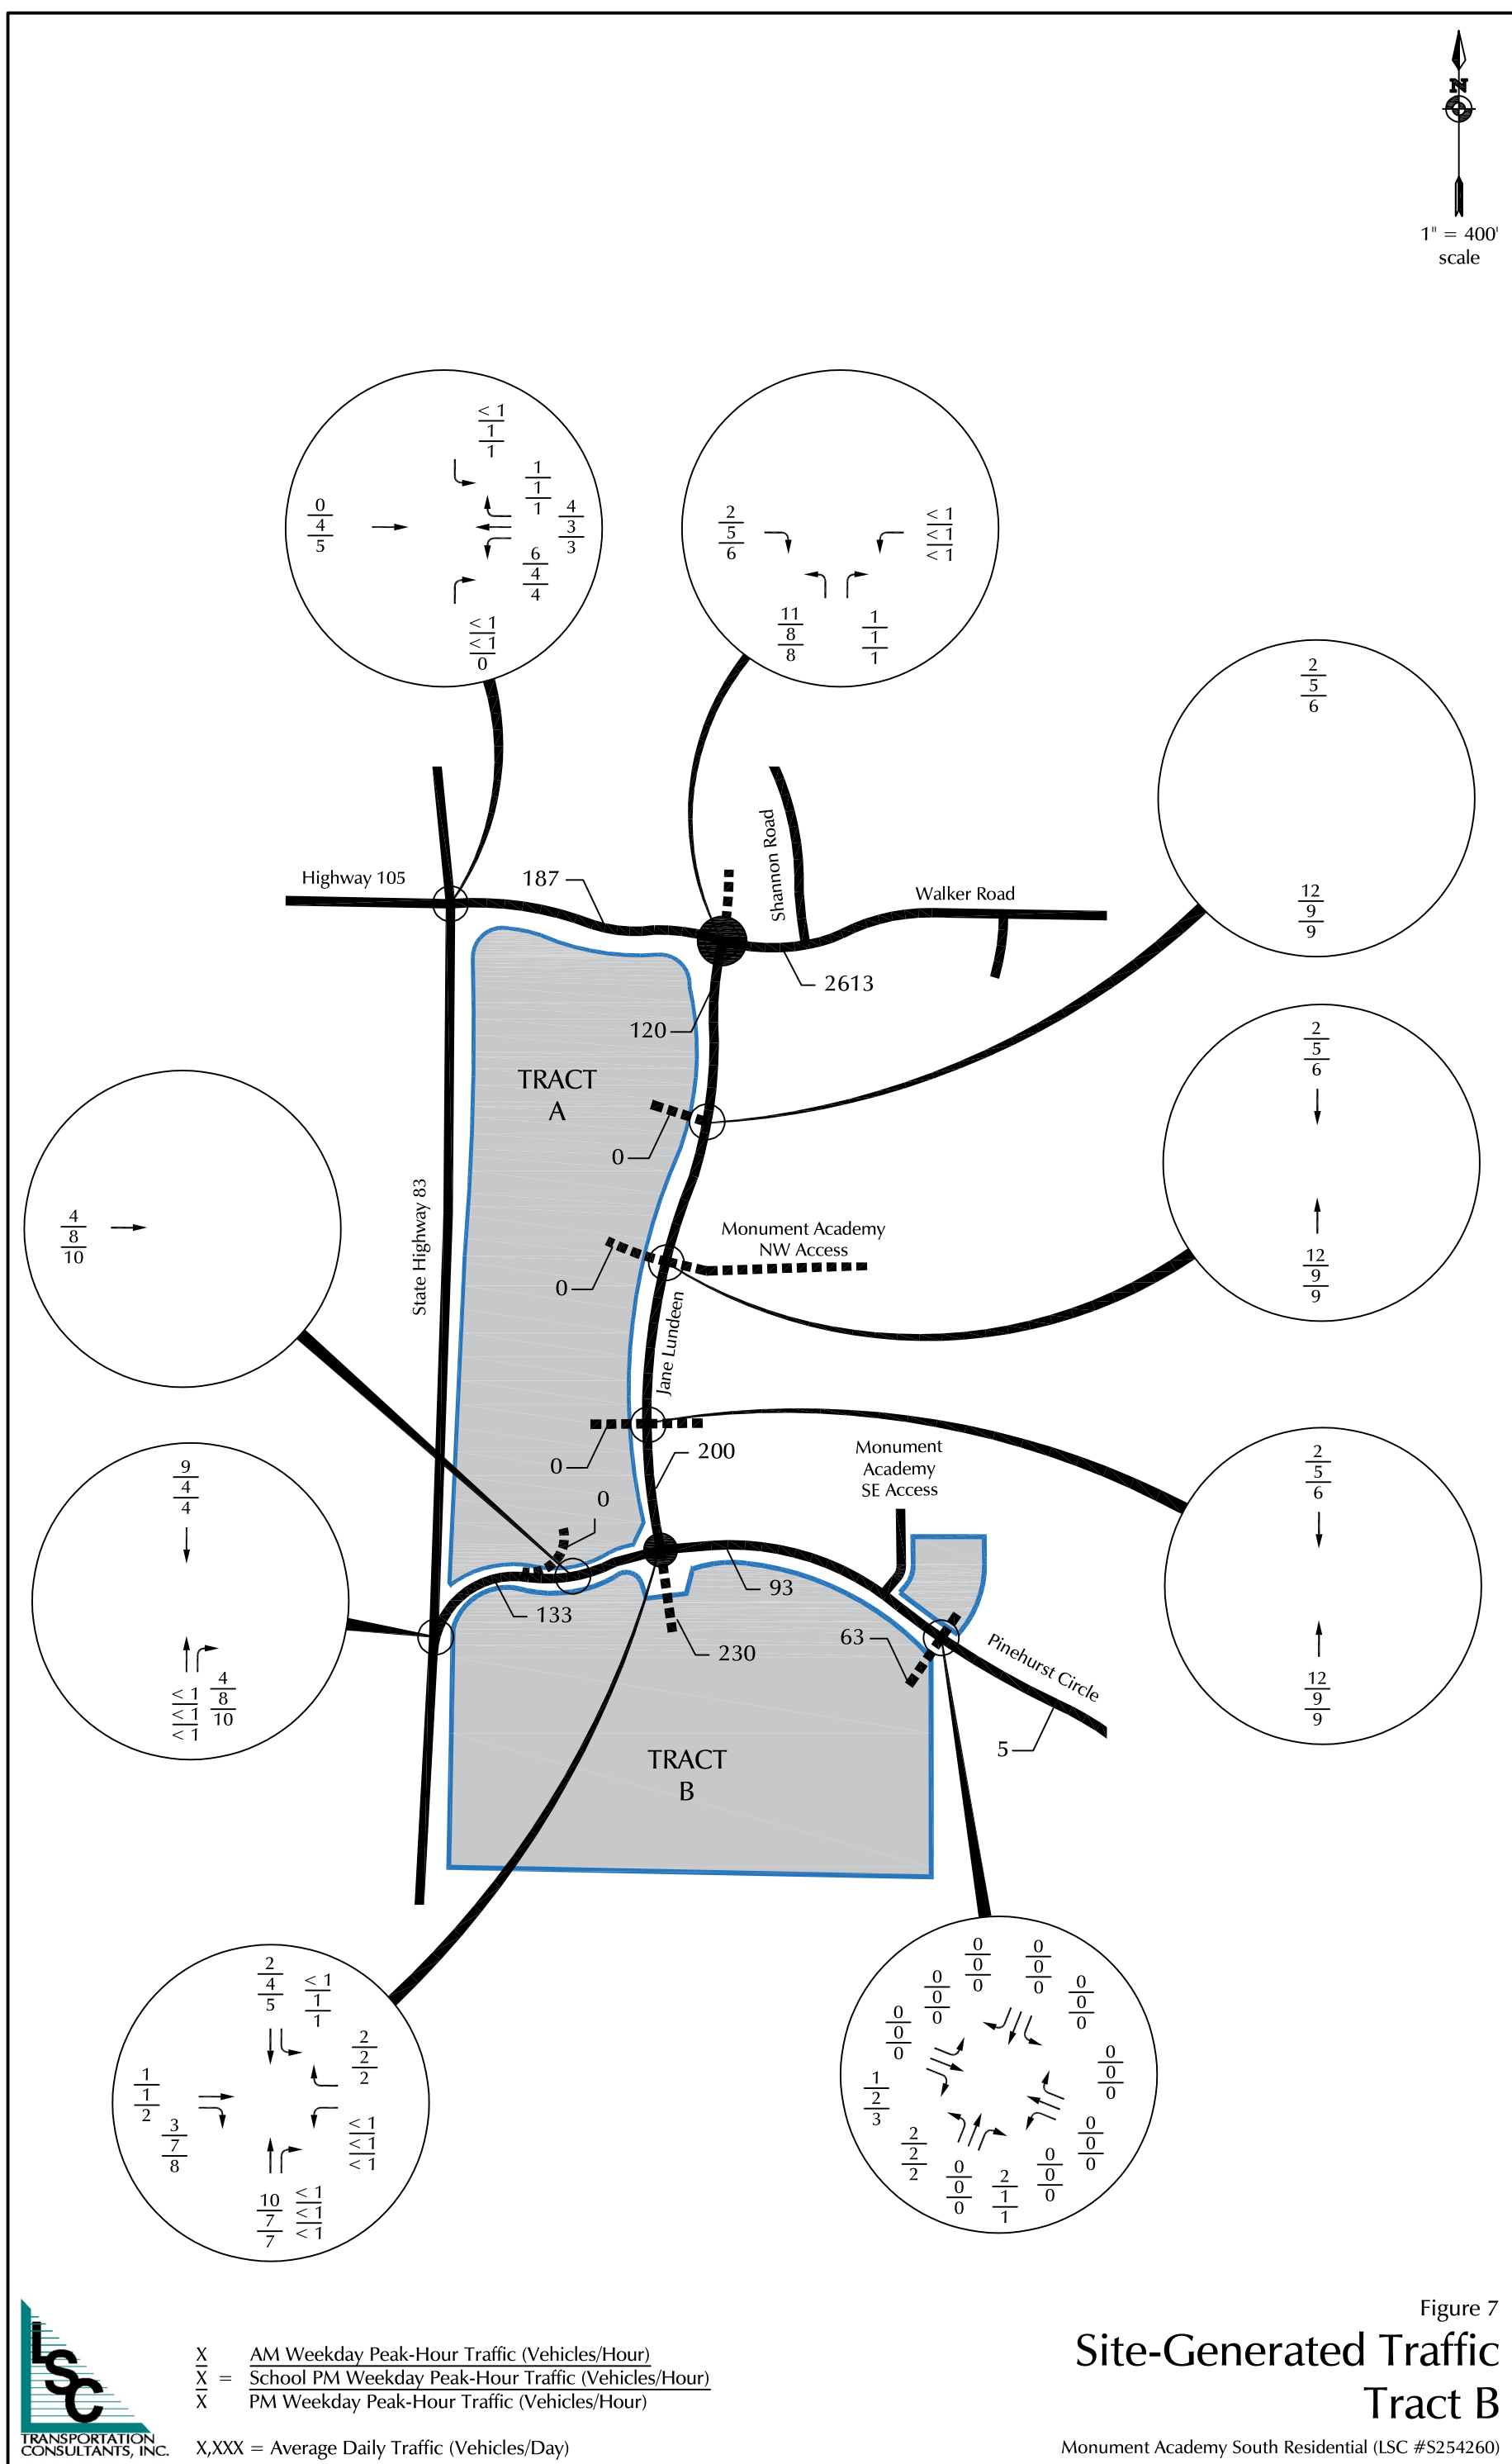




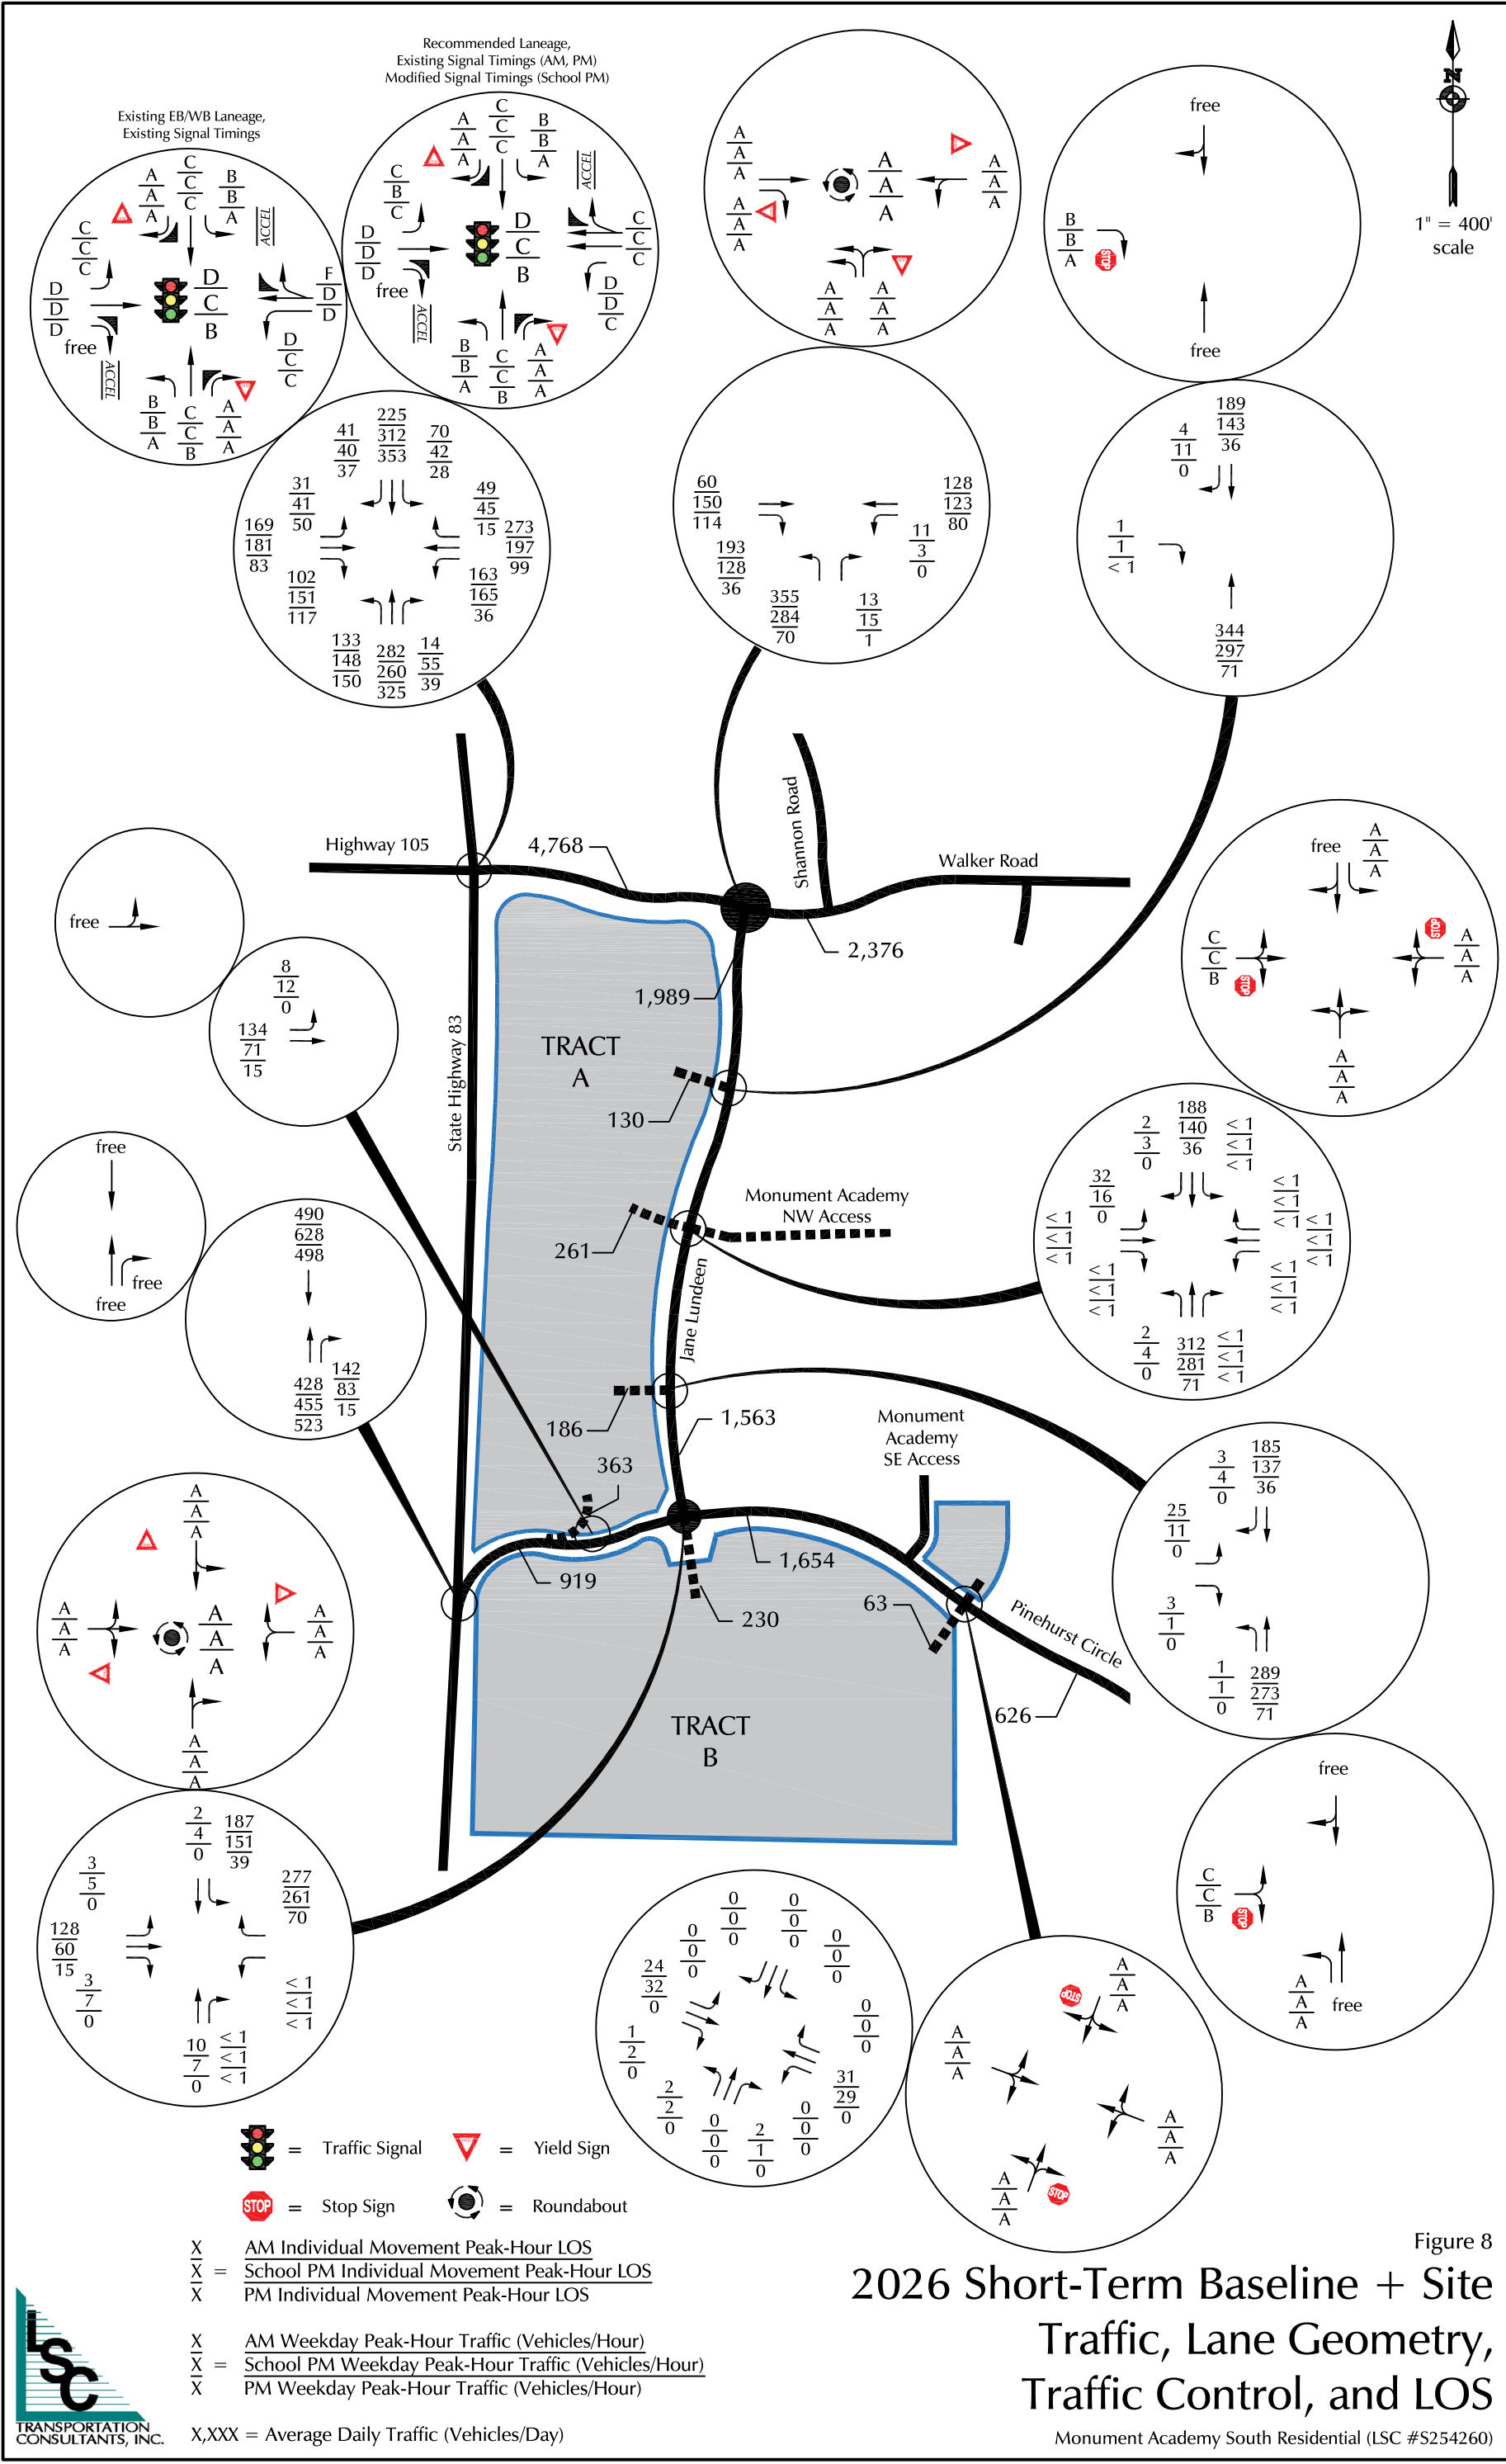


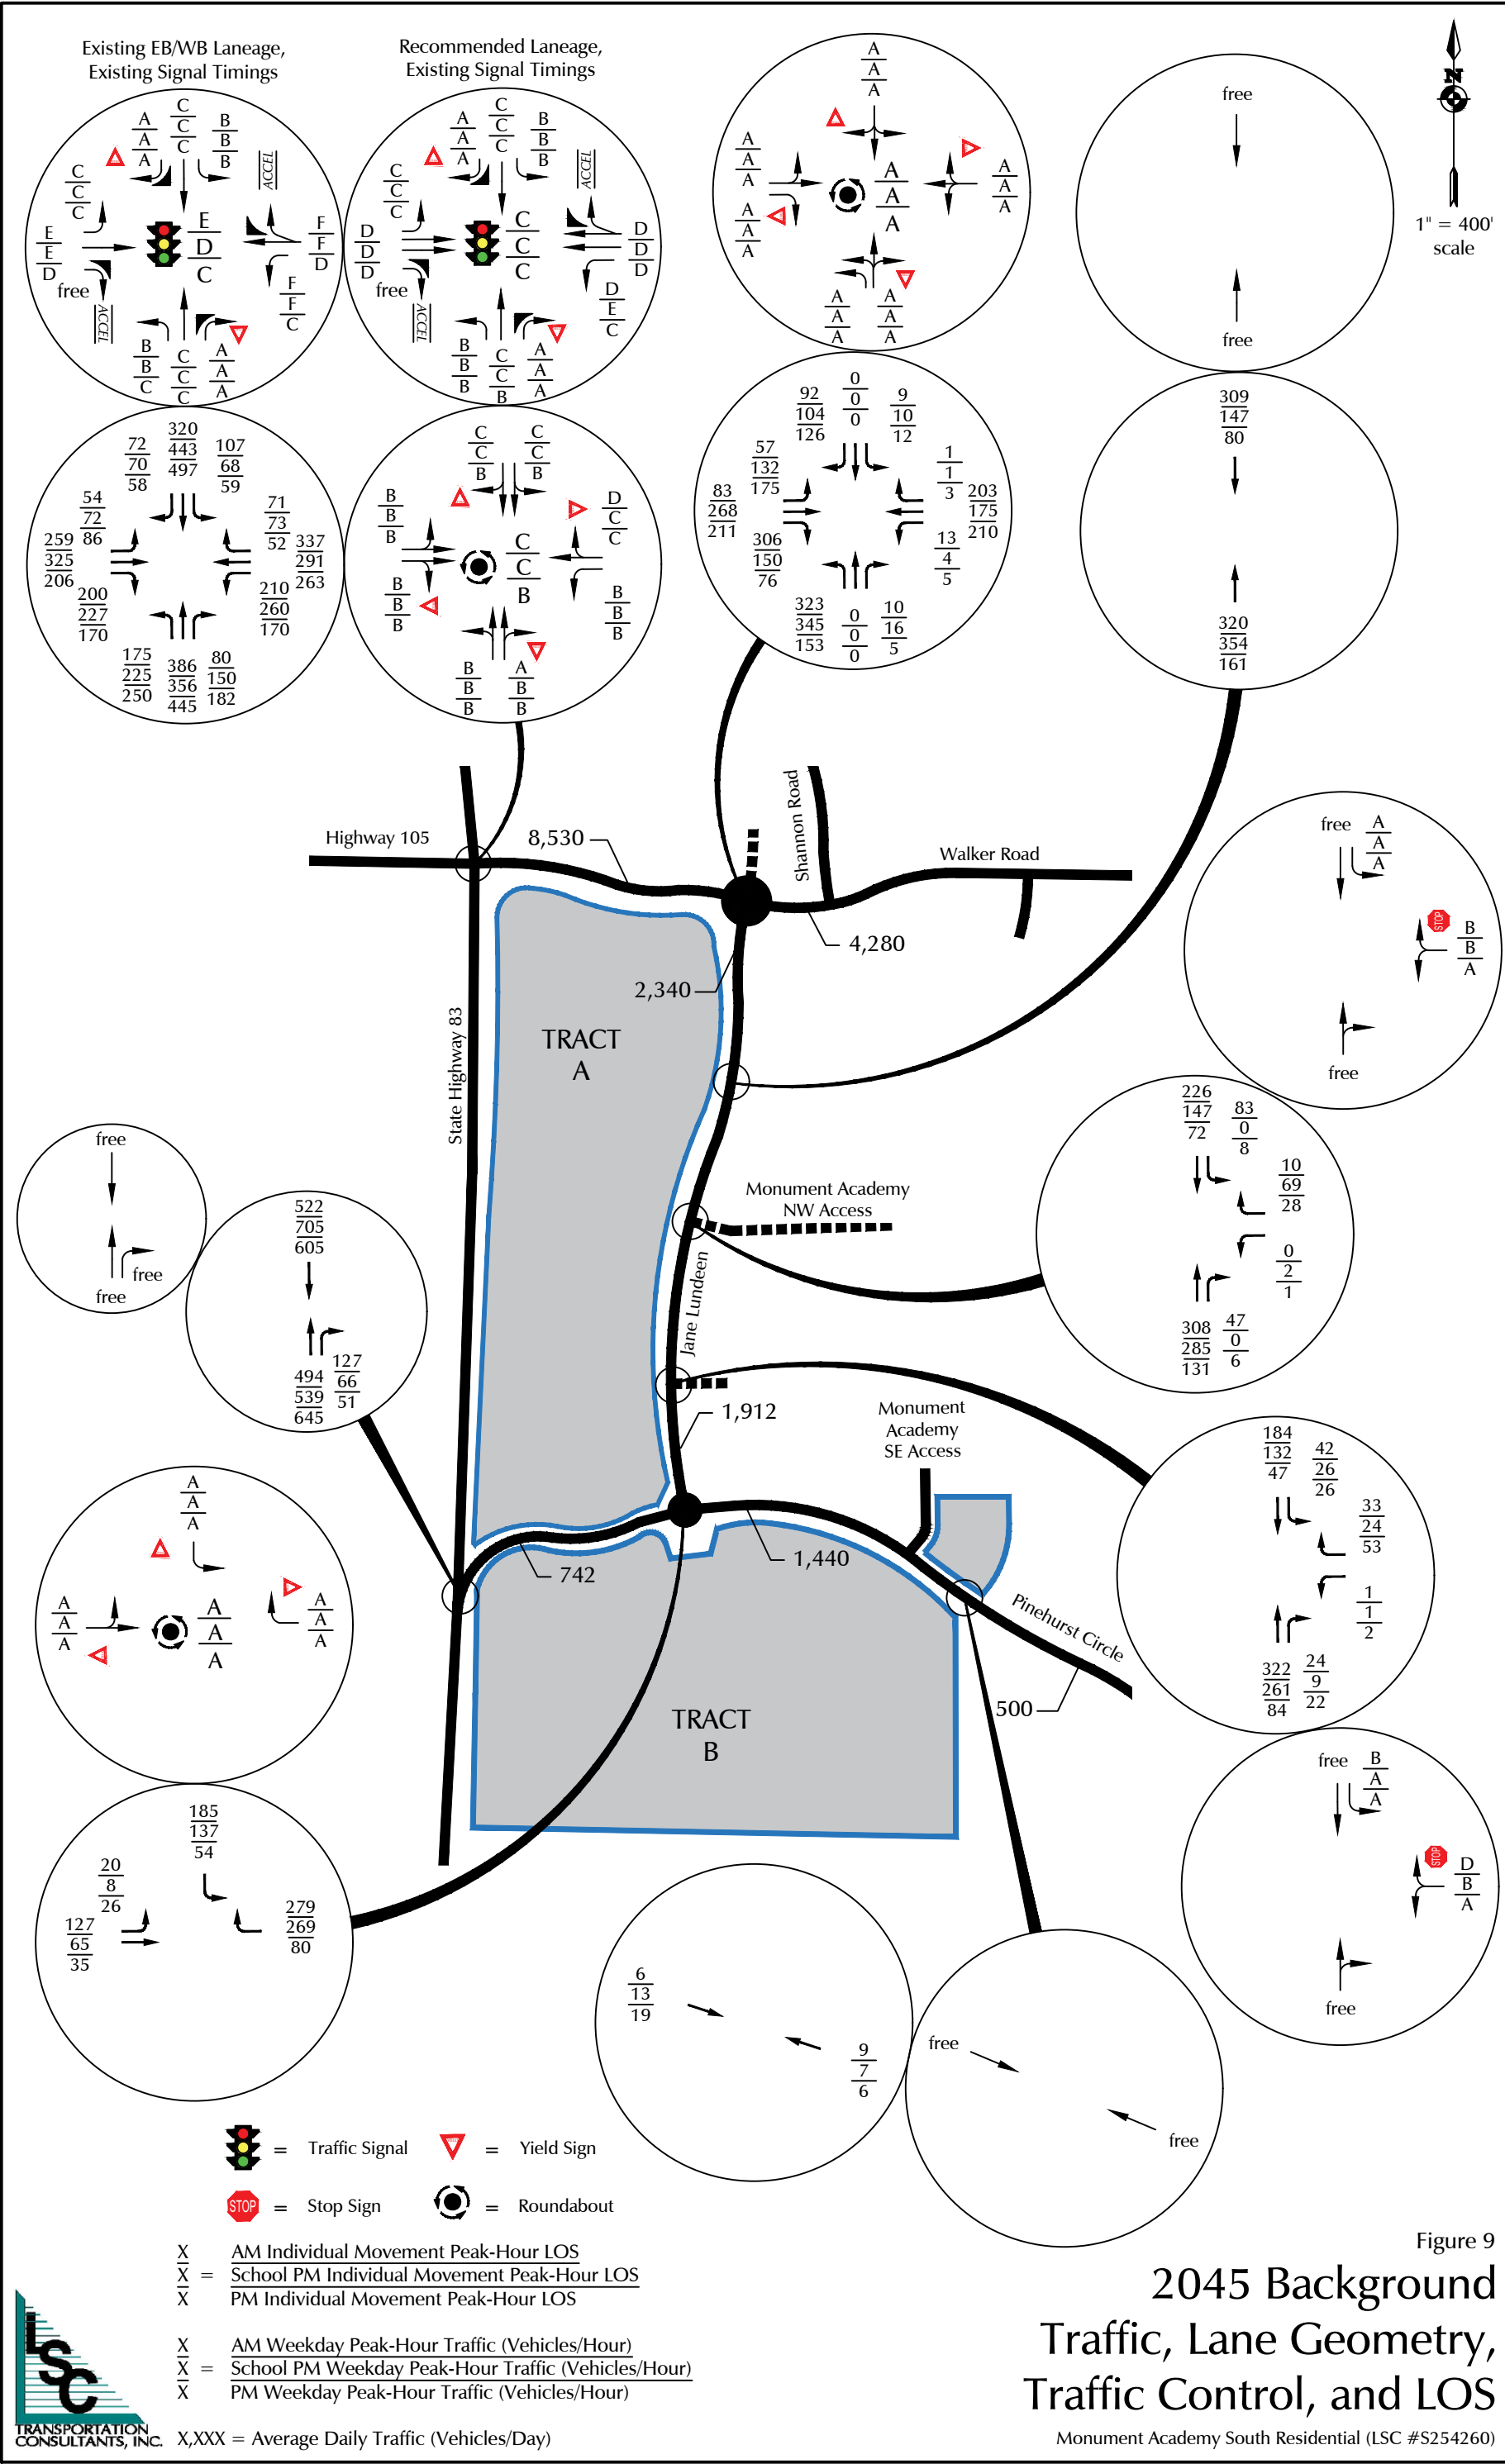

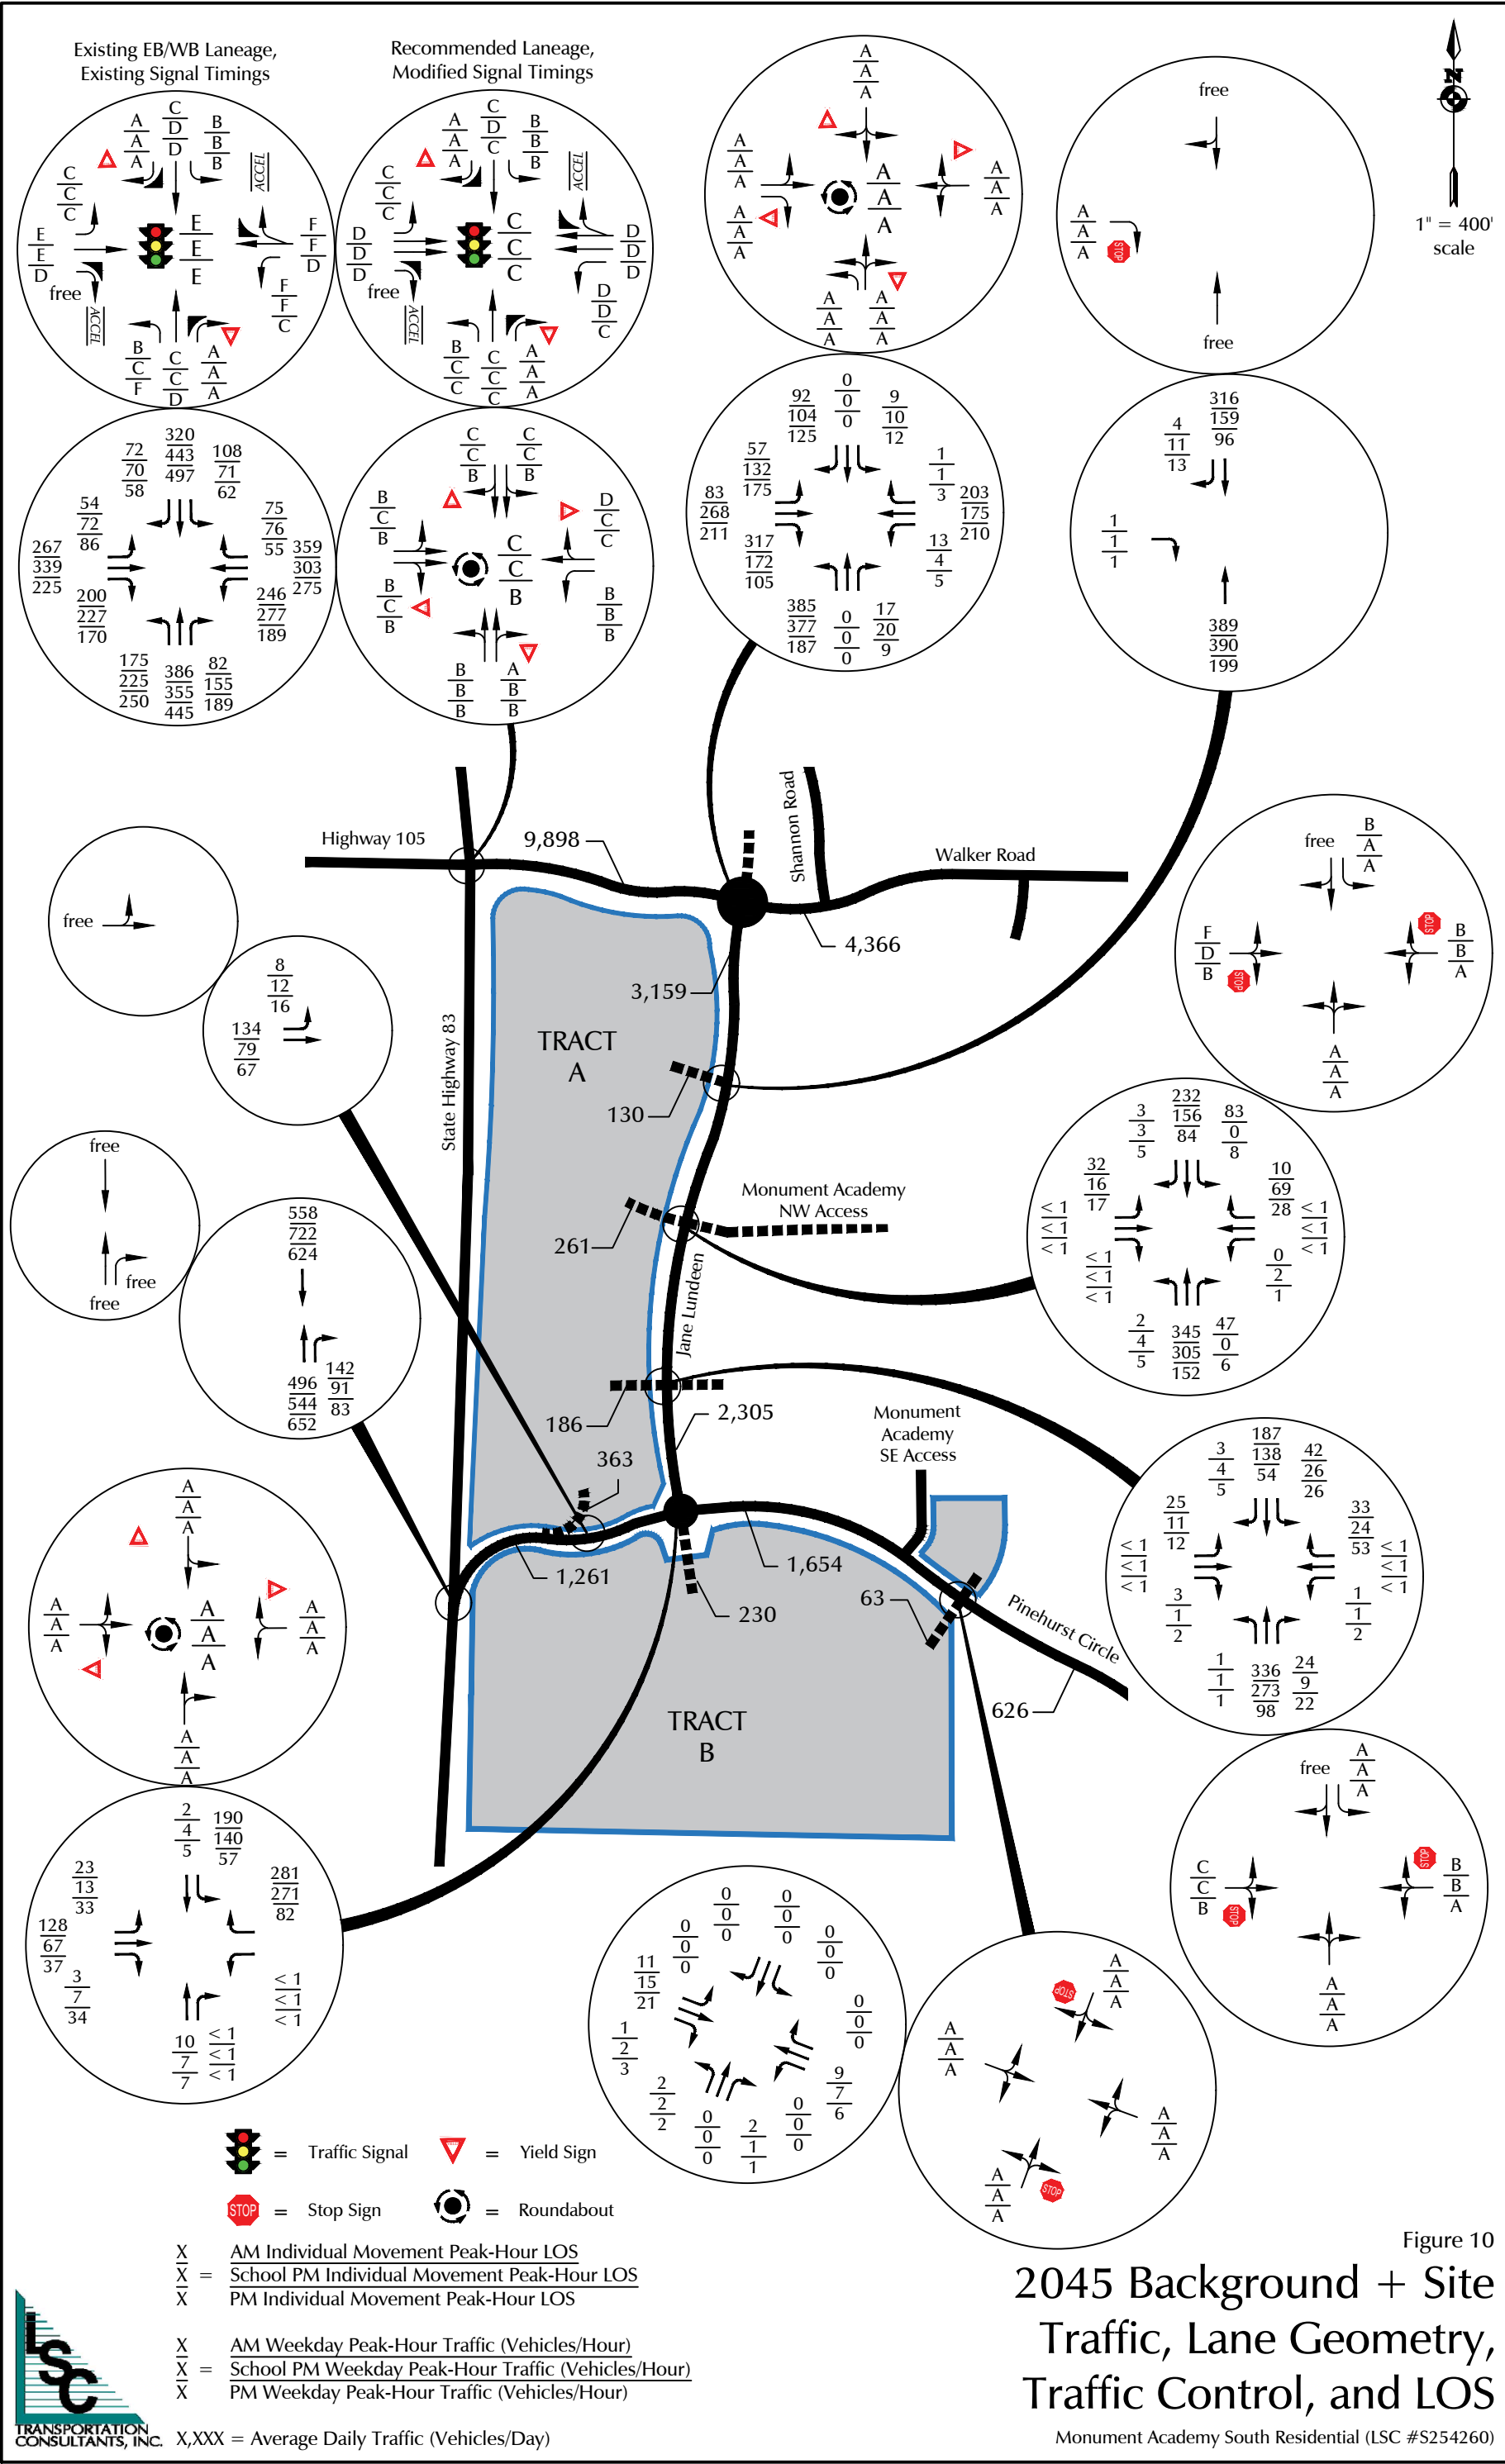

Option	North Access	Middle Access	South Access
A	R/O	TWSC, EBL prohibition*	TWSC, no restrictions
B	R/O	TWSC, EBL prohibition*	TWSC, EBL prohibition*
C	R/O	Roundabout	TWSC, EBL prohibition*

* No EBL during school peak times, using signage

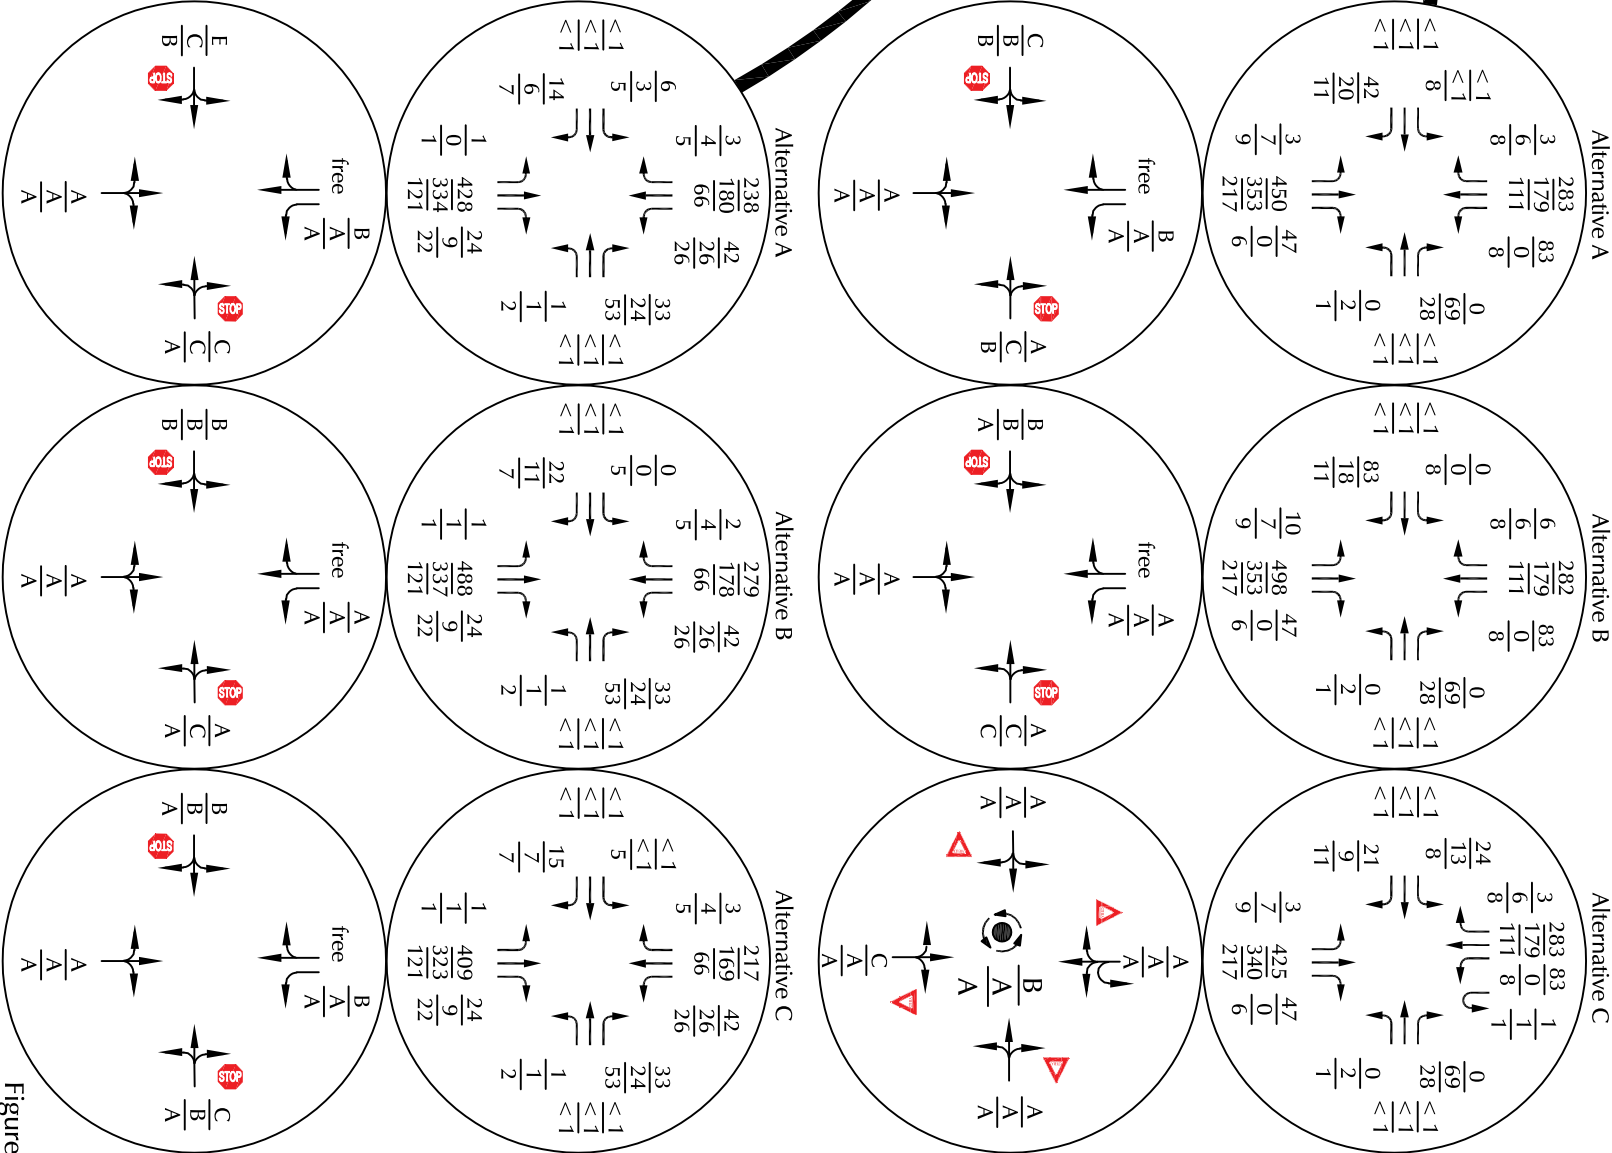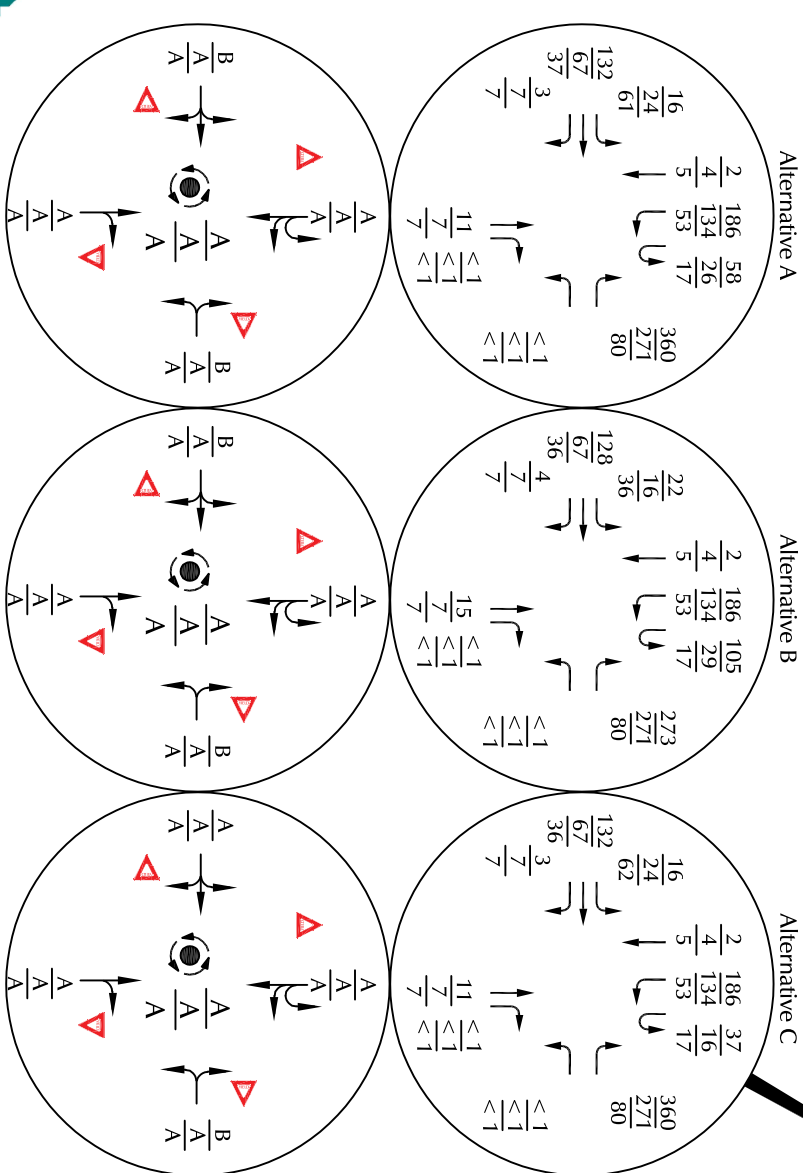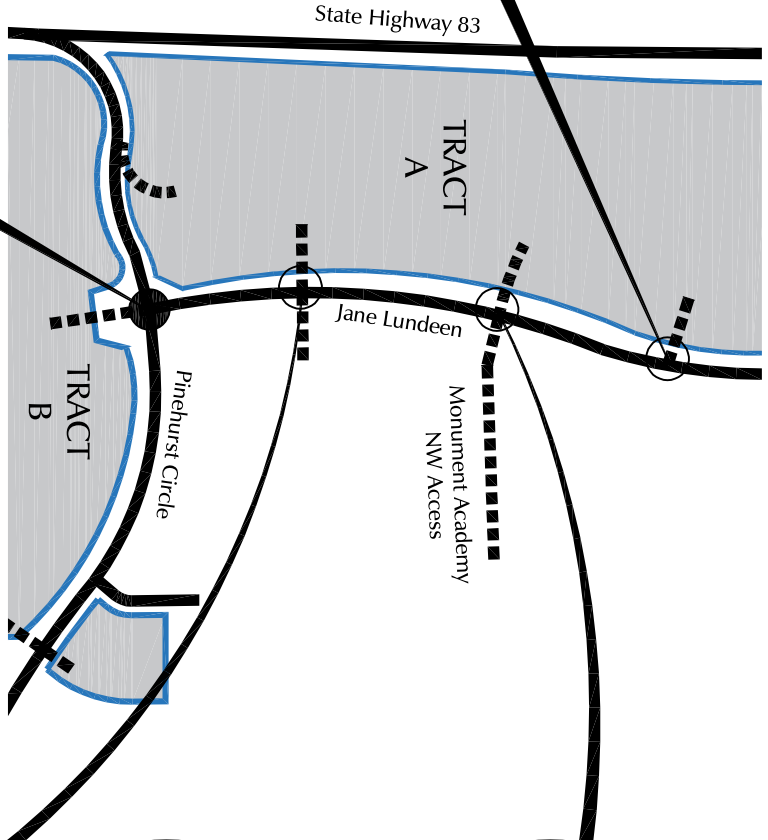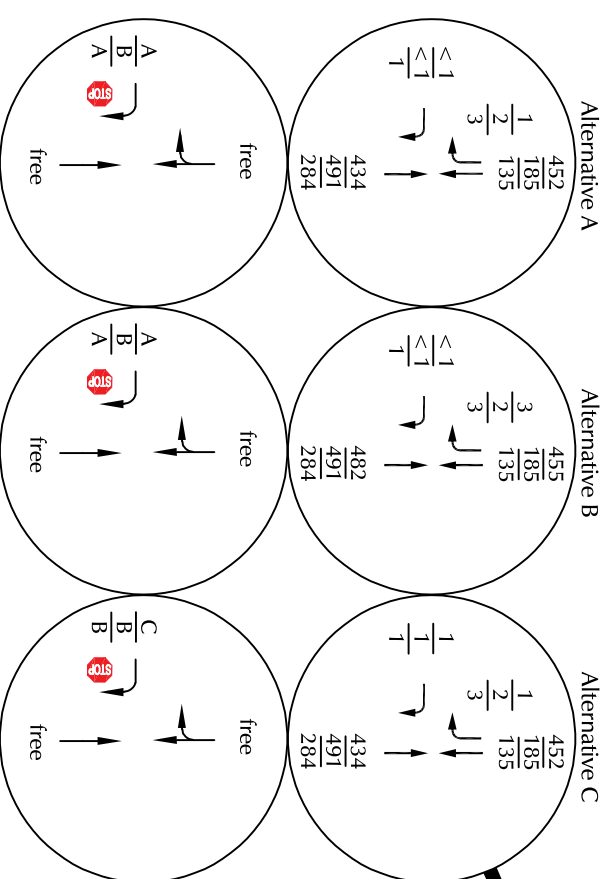



TRANSPORTATION

CONSULTANTS, INC.

X,XXX = Average Daily Traffic (Vehicles/Day)

X

AM Weekday Peak-Hour Traffic (Vehicles/Hour)

X

School PM Weekday Peak-Hour Traffic (Vehicles/Hour)

X

PM Weekday Peak-Hour Traffic (Vehicles/Hour)

X

AM Individual Movement Peak-Hour LOS

X

School PM Individual Movement Peak-Hour LOS

X

PM Individual Movement Peak-Hour LOS


 = Yield Sign


 = Roundabout


 = Traffic Signal


 = Stop Sign





2045 Background + Site Traffic, Lane Geometry, Traffic Control, and LOS (with Right-In/Right-Out)

Monument Academy South Residential (ISC #S254260)

Figure 11

Option	North Access	Middle Access	South Access
D	Removed	TWSC, EBL prohibition*	TWSC, no restrictions
E	Removed	TWSC, EBL prohibition*	TWSC, EBL prohibition*
F	Removed	Roundabout	TWSC, EBL prohibition*

* No EBL during school peak times, using signage

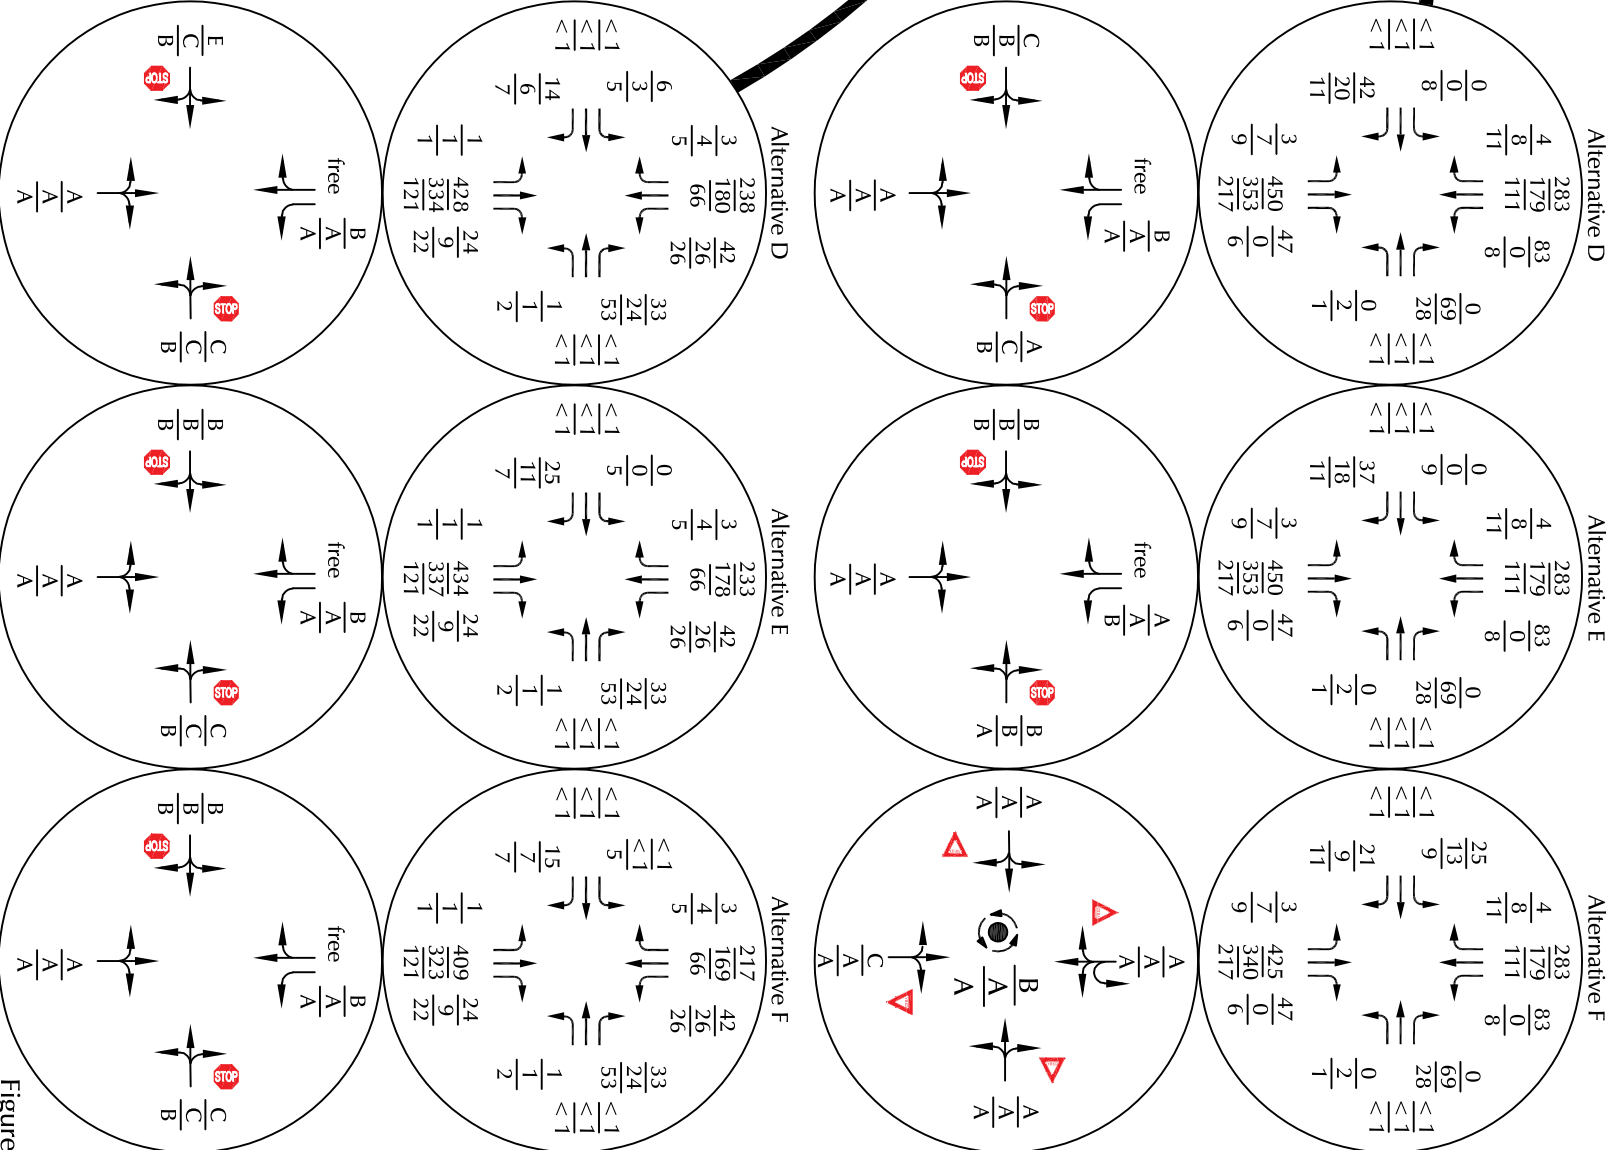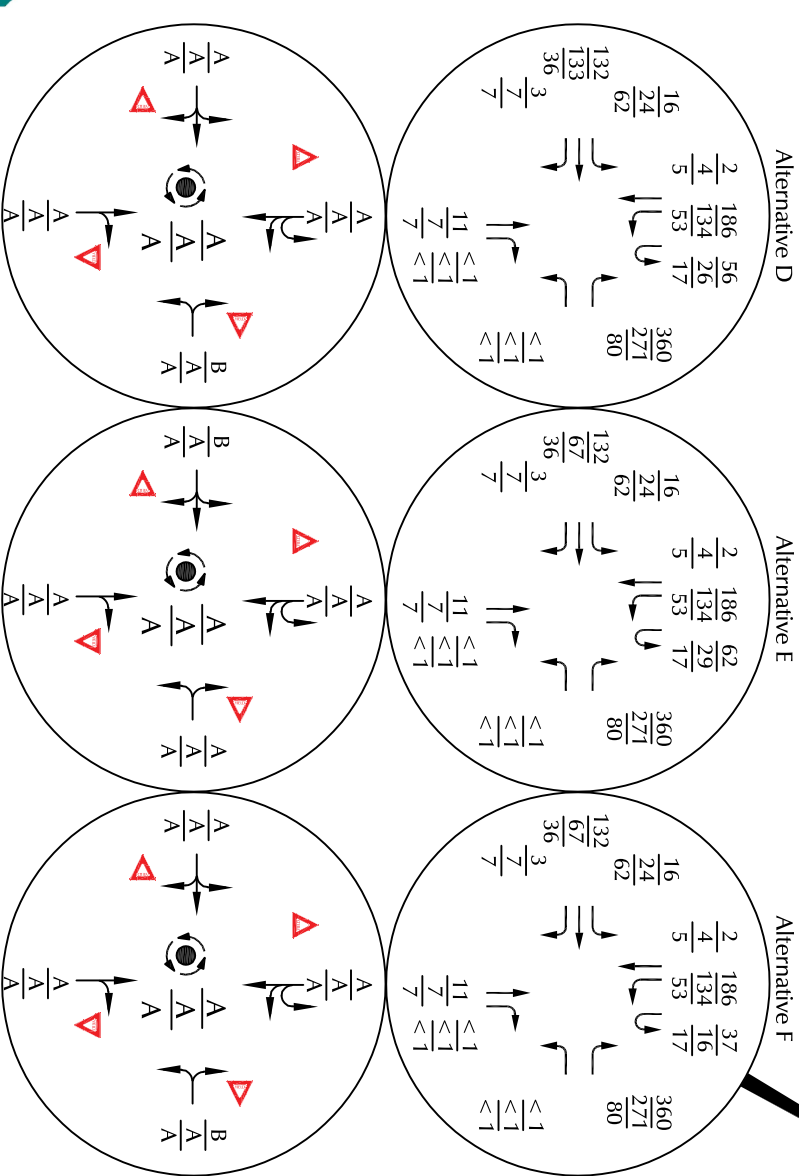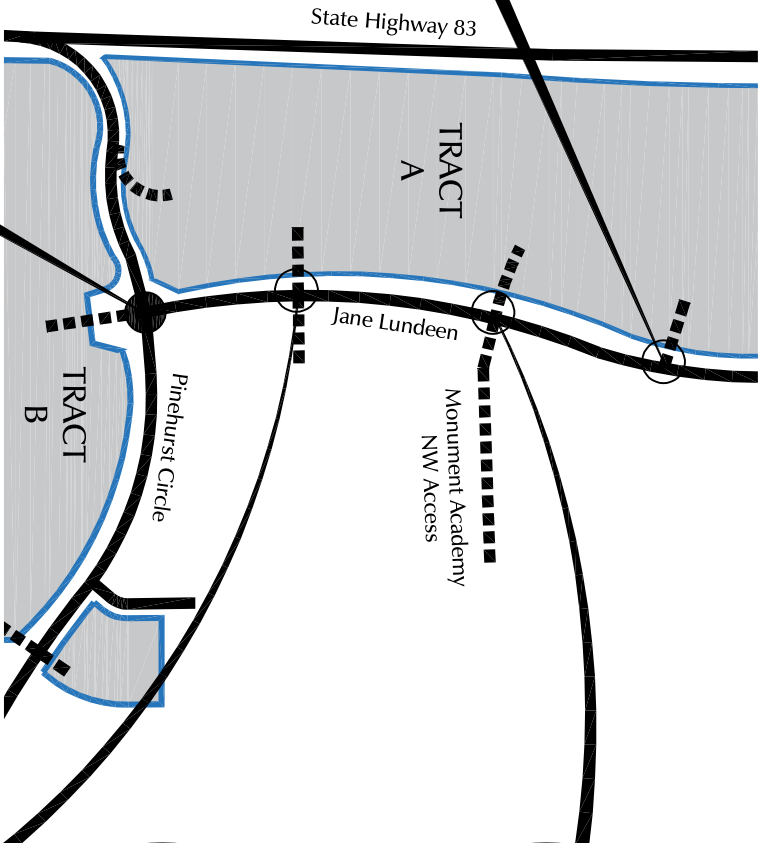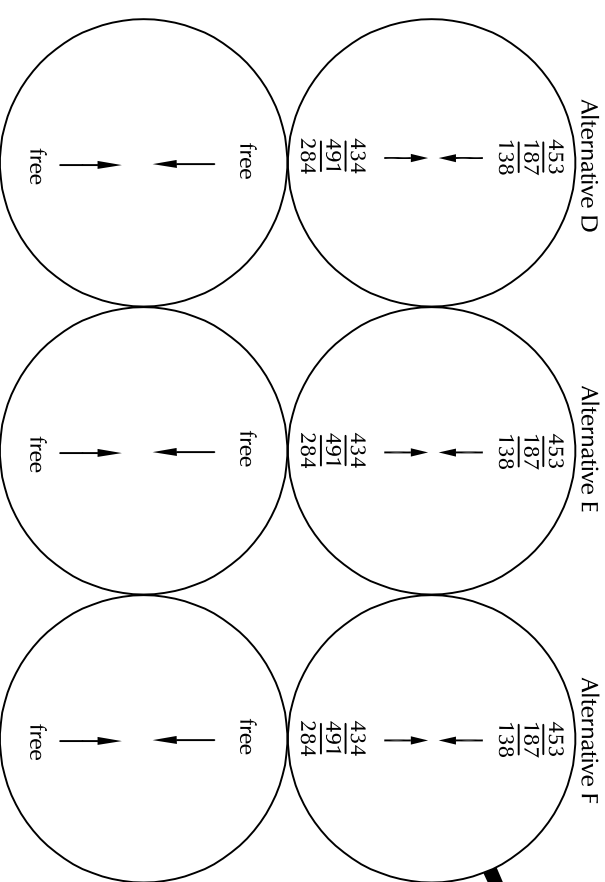



TRANSPORTATION

CONSULTANTS, INC.

X,XXX = Average Daily Traffic (Vehicles/Day)

X

X

X

AM Weekday Peak-Hour Traffic (Vehicles/Hour)

School PM Weekday Peak-Hour Traffic (Vehicles/Hour)

PM Weekday Peak-Hour Traffic (Vehicles/Hour)

X

X

X

AM Individual Movement Peak-Hour LOS

School PM Individual Movement Peak-Hour LOS

PM Individual Movement Peak-Hour LOS

= Yield Sign

= Roundabout

= Traffic Signal

= Stop Sign


2045 Background + Site Traffic, Lane Geometry, Traffic Control, and LOS (No Right-In/Right-Out)

Monument Academy South Residential (ISC #S254260)

Figure 12



1" = 1,000'
scale

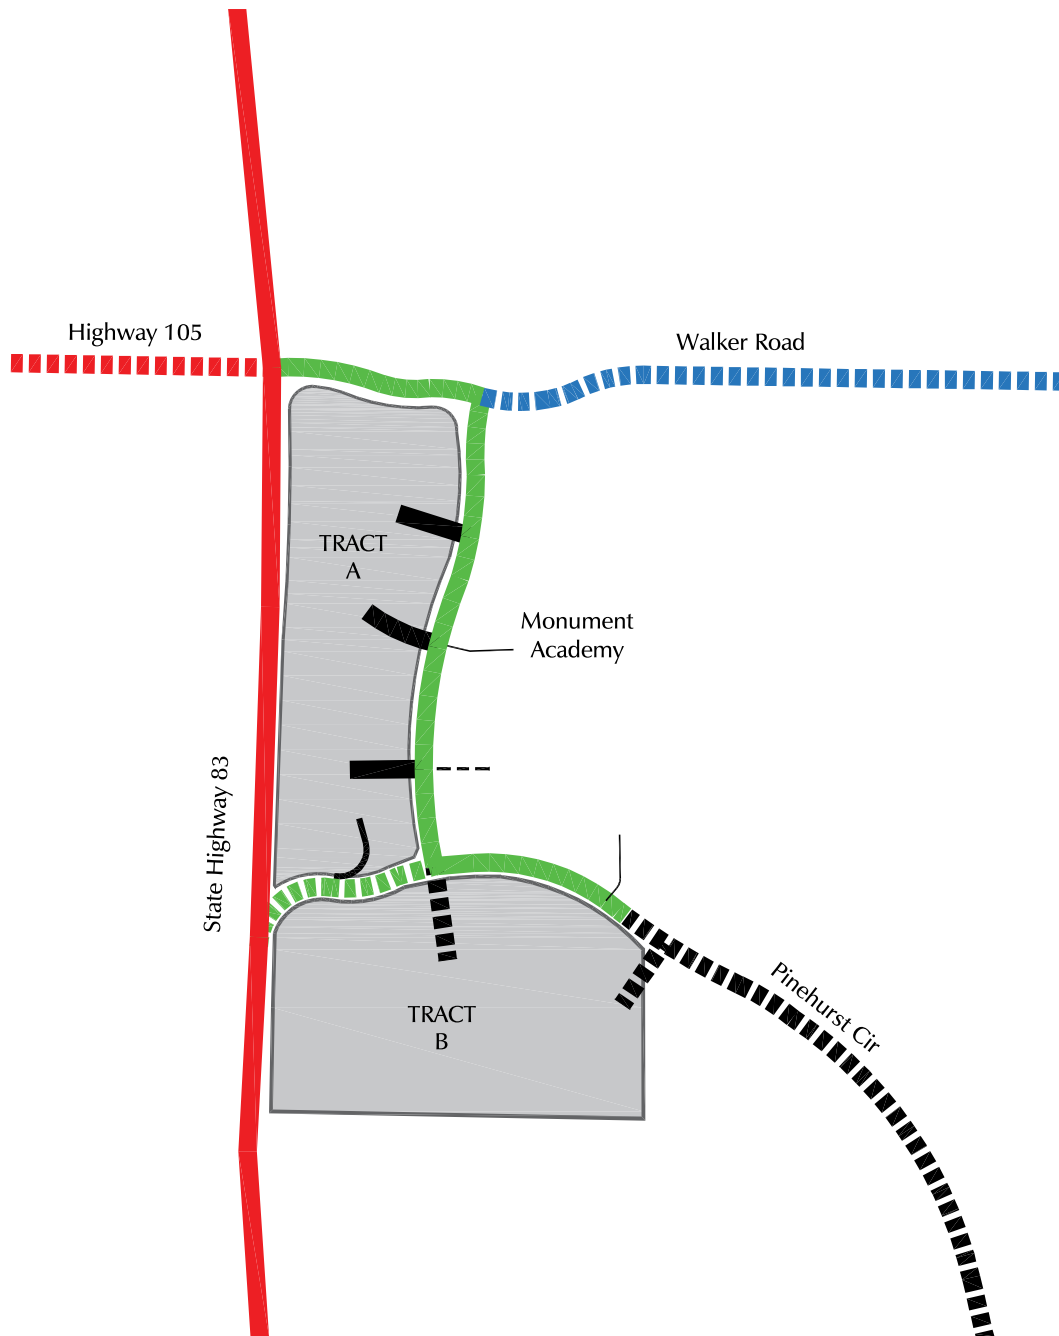

- Regional Highway (CDOT R-A)
- - - Principal Arterial (Rural, 3 Lanes)
- - - Major Collector (Rural)
- Non-Residential Collector (Urban)
- - - Non-Residential Collector (Urban, One-Way/Modified)
- Local (Urban)
- - - Local (Rural)

Figure 13
**Roadway
Classifications
(Existing and
Recommended Site)**

Monument Academy South Residential (LSC #S254260)

Traffic Counts

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Hwy 83 - Walker Rd AM 5-13-25

Site Code : 00000000

Start Date : 5/13/2025

Page No : 1

Groups Printed- Unshifted

	Hwy 83 Southbound					Walker Rd Westbound					Hwy 83 Northbound					Hwy 105 Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
06:30	0	12	0	0	12	0	2	2	0	4	0	32	5	0	37	3	1	0	0	4	57
06:35	0	11	0	0	11	2	2	0	0	4	0	29	10	0	39	3	0	0	0	3	57
06:40	1	15	1	0	17	0	1	2	0	3	0	31	16	0	47	4	0	3	0	7	74
06:45	1	9	0	0	10	2	8	1	0	11	0	18	11	0	29	13	0	2	0	15	65
06:50	2	18	1	0	21	1	5	5	0	11	1	27	16	0	44	8	3	1	0	12	88
06:55	2	16	0	0	18	1	5	2	0	8	0	24	11	0	35	12	0	1	0	13	74
Total	6	81	2	0	89	6	23	12	0	41	1	161	69	0	231	43	4	7	0	54	415
07:00	4	24	2	0	30	2	2	1	0	5	0	26	14	0	40	10	3	0	0	13	88
07:05	5	15	0	0	20	1	5	4	0	10	1	25	7	0	33	6	3	3	0	12	75
07:10	5	13	1	0	19	3	4	6	0	13	0	25	6	0	31	9	3	1	0	13	76
07:15	3	21	2	0	26	1	12	5	0	18	0	21	9	0	30	6	11	2	0	19	93
07:20	4	20	5	0	29	0	20	6	0	26	0	18	4	0	22	8	14	1	0	23	100
07:25	3	23	11	0	37	4	13	7	0	24	1	31	15	0	47	8	23	0	0	31	139
07:30	4	17	18	0	39	6	38	13	0	57	2	15	10	0	27	8	39	5	0	52	175
07:35	5	15	14	0	34	9	33	12	0	54	0	28	9	0	37	6	30	5	0	41	166
07:40	4	27	5	0	36	4	28	20	0	52	4	20	14	0	38	10	11	4	0	25	151
07:45	2	20	3	0	25	8	42	21	0	71	0	28	12	0	40	6	7	2	0	15	151
07:50	1	16	5	0	22	9	28	26	0	63	0	24	15	0	39	13	3	3	0	19	143
07:55	2	20	1	0	23	0	15	4	0	19	1	24	15	0	40	6	1	4	0	11	93
Total	42	231	67	0	340	47	240	125	0	412	9	285	130	0	424	96	148	30	0	274	1450
08:00	3	18	1	0	22	0	6	3	0	9	2	23	17	0	42	16	6	1	0	23	96
08:05	2	8	0	0	10	3	6	1	0	10	1	16	7	0	24	12	6	0	0	18	62
08:10	4	10	0	0	14	0	2	0	0	2	1	26	11	0	38	17	4	1	0	22	76
08:15	2	14	3	0	19	0	3	2	0	5	3	38	8	0	49	9	5	5	0	19	92
08:20	4	22	0	0	26	0	4	3	0	7	4	22	7	0	33	12	6	1	0	19	85
08:25	1	17	0	0	18	0	3	2	0	5	6	9	11	0	26	5	8	0	0	13	62
Grand Total	64	401	73	0	538	56	287	148	0	491	27	580	260	0	867	210	187	45	0	442	2338
Apprch %	11.9	74.5	13.6	0		11.4	58.5	30.1	0		3.1	66.9	30	0		47.5	42.3	10.2	0		
Total %	2.7	17.2	3.1	0	23	2.4	12.3	6.3	0	21	1.2	24.8	11.1	0	37.1	9	8	1.9	0	18.9	

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Hwy 83 - Walker Rd AM 5-13-25

Site Code : 00000000

Start Date : 5/13/2025

Page No : 2

	Hwy 83 Southbound					Walker Rd Westbound					Hwy 83 Northbound					Hwy 105 Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 06:30 to 08:25 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:05																					
07:05	5	15	0	0	20	1	5	4	0	10	1	25	7	0	33	6	3	3	0	12	75
07:10	5	13	1	0	19	3	4	6	0	13	0	25	6	0	31	9	3	1	0	13	76
07:15	3	21	2	0	26	1	12	5	0	18	0	21	9	0	30	6	11	2	0	19	93
07:20	4	20	5	0	29	0	20	6	0	26	0	18	4	0	22	8	14	1	0	23	100
07:25	3	23	11	0	37	4	13	7	0	24	1	31	15	0	47	8	23	0	0	31	139
07:30	4	17	18	0	39	6	38	13	0	57	2	15	10	0	27	8	39	5	0	52	175
07:35	5	15	14	0	34	9	33	12	0	54	0	28	9	0	37	6	30	5	0	41	166
07:40	4	27	5	0	36	4	28	20	0	52	4	20	14	0	38	10	11	4	0	25	151
07:45	2	20	3	0	25	8	42	21	0	71	0	28	12	0	40	6	7	2	0	15	151
07:50	1	16	5	0	22	9	28	26	0	63	0	24	15	0	39	13	3	3	0	19	143
07:55	2	20	1	0	23	0	15	4	0	19	1	24	15	0	40	6	1	4	0	11	93
08:00	3	18	1	0	22	0	6	3	0	9	2	23	17	0	42	16	6	1	0	23	96
Total Volume	41	225	66	0	332	45	244	127	0	416	11	282	133	0	426	102	151	31	0	284	1458
% App. Total	12.3	67.8	19.9	0		10.8	58.7	30.5	0		2.6	66.2	31.2	0		35.9	53.2	10.9	0		
PHF	.683	.694	.306	.000	.709	.417	.484	.407	.000	.488	.229	.758	.652	.000	.755	.531	.323	.517	.000	.455	.694

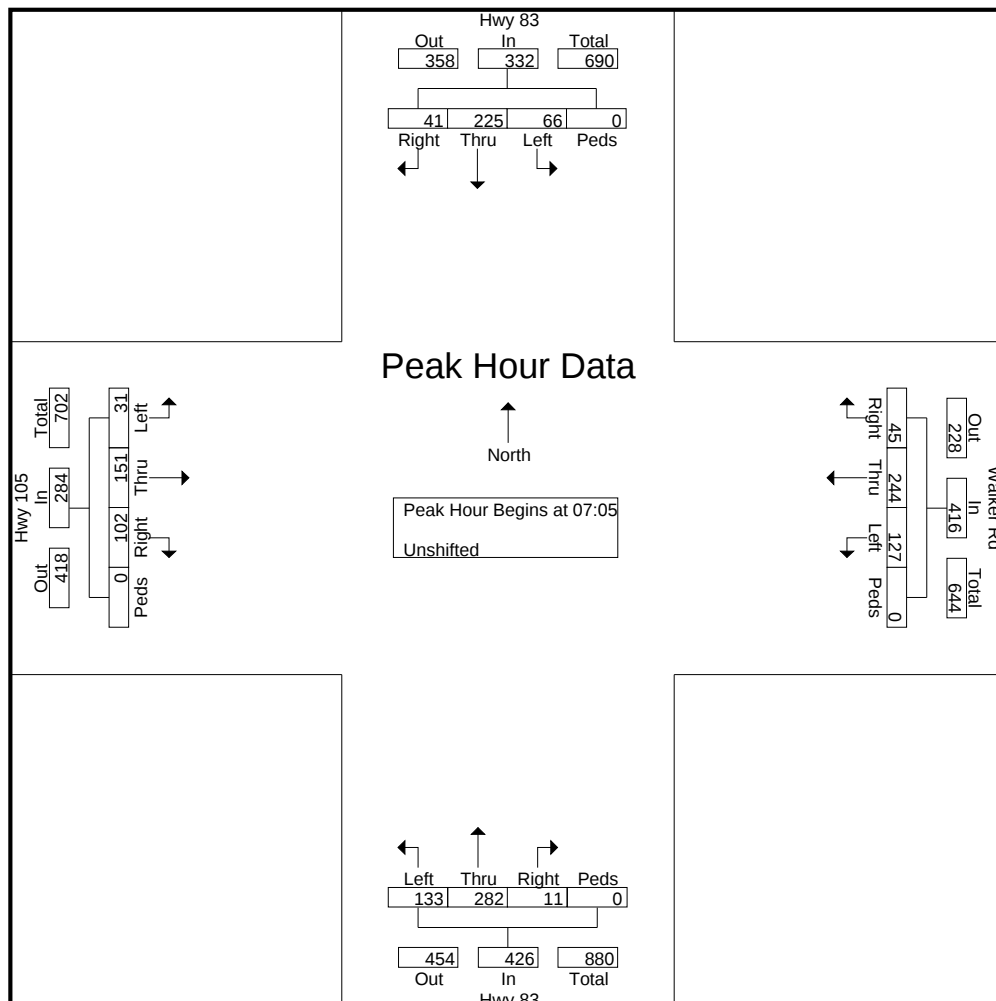

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Hwy 83 - Walker Rd AM 5-13-25

Site Code : 00000000

Start Date : 5/13/2025


Page No : 3

	Hwy 83 Southbound					Walker Rd Westbound					Hwy 83 Northbound					Hwy 105 Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total

Peak Hour Analysis From 06:30 to 08:25 - Peak 1 of 1

Peak Hour for Each Approach Begins at:

	07:00					07:05					07:25					07:15				
+0 mins.	4	24	2	0	30	1	5	4	0	10	1	31	15	0	47	6	11	2	0	19
+5 mins.	5	15	0	0	20	3	4	6	0	13	2	15	10	0	27	8	14	1	0	23
+10 mins.	5	13	1	0	19	1	12	5	0	18	0	28	9	0	37	8	23	0	0	31
+15 mins.	3	21	2	0	26	0	20	6	0	26	4	20	14	0	38	8	39	5	0	52
+20 mins.	4	20	5	0	29	4	13	7	0	24	0	28	12	0	40	6	30	5	0	41
+25 mins.	3	23	11	0	37	6	38	13	0	57	0	24	15	0	39	10	11	4	0	25
+30 mins.	4	17	18	0	39	9	33	12	0	54	1	24	15	0	40	6	7	2	0	15
+35 mins.	5	15	14	0	34	4	28	20	0	52	2	23	17	0	42	13	3	3	0	19
+40 mins.	4	27	5	0	36	8	42	21	0	71	1	16	7	0	24	6	1	4	0	11
+45 mins.	2	20	3	0	25	9	28	26	0	63	1	26	11	0	38	16	6	1	0	23
+50 mins.	1	16	5	0	22	0	15	4	0	19	3	38	8	0	49	12	6	0	0	18
+55 mins.	2	20	1	0	23	0	6	3	0	9	4	22	7	0	33	17	4	1	0	22
Total Volume	42	231	67	0	340	45	244	127	0	416	19	295	140	0	454	116	155	28	0	299
% App. Total	12.4	67.9	19.7	0		10.8	58.7	30.5	0		4.2	65	30.8	0		38.8	51.8	9.4	0	
PHF	.700	.713	.310	.000	.726	.417	.484	.407	.000	.488	.396	.647	.686	.000	.772	.569	.331	.467	.000	.479

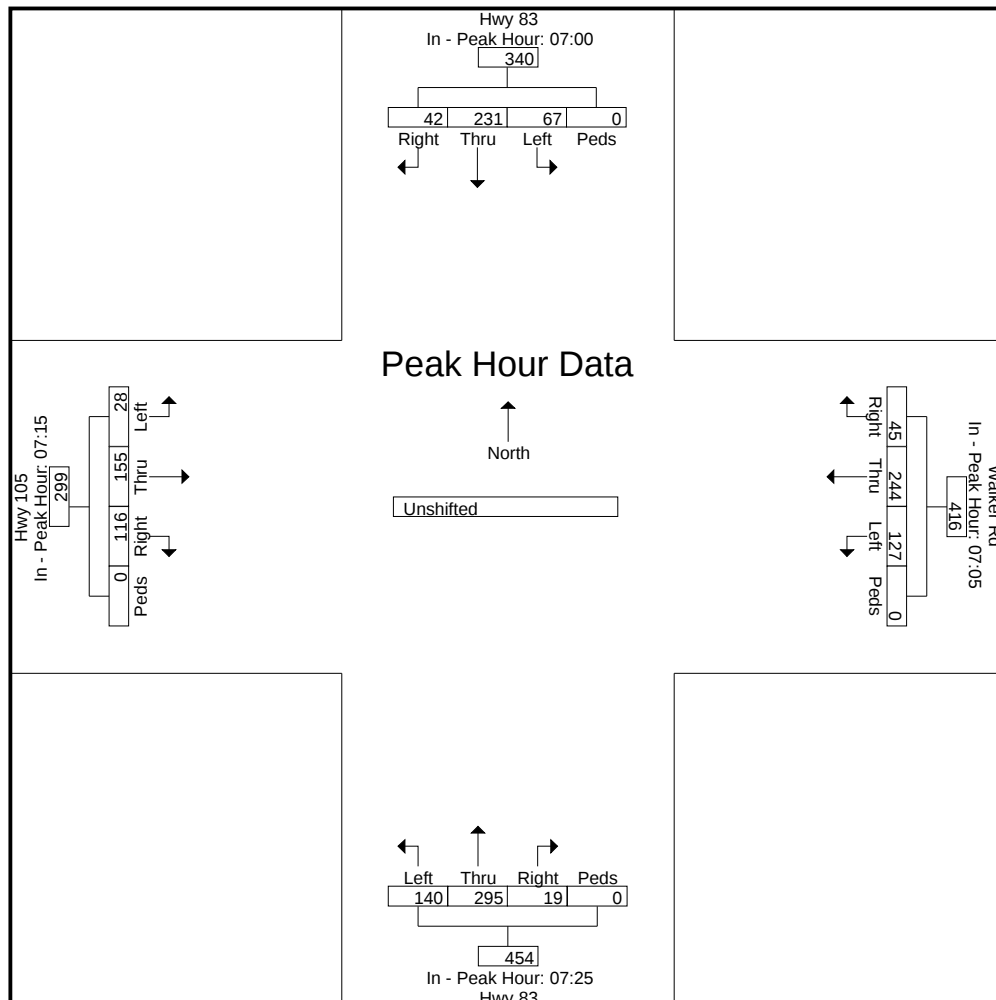

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Hwy 83 - Walker Rd PM 5-13-25

Site Code : 00000000

Start Date : 5/13/2025

Page No : 1

Groups Printed- Unshifted

	Hwy 83 Southbound					Walker Rd Westbound					Hwy 83 Northbound					Hwy 105 Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
15:00	3	25	1	0	29	1	7	3	0	11	0	23	12	0	35	8	15	1	0	24	99
15:05	4	14	2	0	20	0	7	1	0	8	1	19	8	0	28	14	10	4	0	28	84
15:10	2	18	3	0	23	0	5	6	0	11	4	19	12	0	35	7	19	4	0	30	99
15:15	5	19	6	0	30	2	5	4	0	11	2	14	16	0	32	8	13	6	0	27	100
15:20	3	29	5	0	37	1	1	1	0	3	8	23	9	0	40	14	11	2	0	27	107
15:25	2	19	1	0	22	1	5	2	0	8	2	21	14	0	37	10	15	9	0	34	101
15:30	1	24	4	0	29	1	6	6	0	13	5	14	17	0	36	13	15	1	0	29	107
15:35	5	27	5	0	37	7	21	18	0	46	10	23	6	0	39	13	20	3	0	36	158
15:40	2	26	7	0	35	0	39	13	0	52	5	26	11	0	42	12	7	1	0	20	149
15:45	4	20	3	0	27	6	29	24	0	59	3	17	7	0	27	12	8	6	0	26	139
15:50	3	38	4	0	45	8	27	24	0	59	3	22	16	0	41	13	17	2	0	32	177
15:55	5	23	3	0	31	7	18	9	0	34	0	10	12	0	22	13	6	1	0	20	107
Total	39	282	44	0	365	34	170	111	0	315	43	231	140	0	414	137	156	40	0	333	1427
16:00	5	17	0	0	22	3	13	15	0	31	7	28	17	0	52	18	6	6	0	30	135
16:05	3	28	1	0	32	5	6	17	0	28	1	15	8	0	24	10	6	3	0	19	103
16:10	4	37	1	0	42	1	4	6	0	11	2	29	11	0	42	19	5	2	0	26	121
16:15	0	19	2	0	21	2	7	6	0	15	1	27	19	0	47	8	4	5	0	17	100
16:20	6	34	0	0	40	0	4	8	0	12	3	28	10	0	41	10	7	2	0	19	112
16:25	2	9	1	0	12	2	1	6	0	9	3	29	16	0	48	13	4	5	0	22	91
16:30	0	24	1	0	25	1	8	1	0	10	4	28	10	0	42	15	5	2	0	22	99
16:35	5	22	2	0	29	2	4	5	0	11	3	18	12	0	33	14	3	3	0	20	93
16:40	3	31	2	0	36	1	12	2	0	15	2	27	8	0	37	9	3	2	0	14	102
16:45	7	22	1	0	30	1	8	7	0	16	2	15	8	0	25	15	5	7	0	27	98
16:50	1	28	1	0	30	0	3	1	0	4	6	19	18	0	43	8	9	3	0	20	97
16:55	2	36	2	0	40	2	5	2	0	9	0	26	10	0	36	9	13	1	0	23	108
Total	38	307	14	0	359	20	75	76	0	171	34	289	147	0	470	148	70	41	0	259	1259
17:00	1	30	0	0	31	1	8	2	0	11	5	23	11	0	39	4	4	4	0	12	93
17:05	2	41	8	0	51	1	3	3	0	7	5	38	13	0	56	7	13	5	0	25	139
17:10	3	29	6	0	38	0	9	2	0	11	2	16	12	0	30	9	10	2	0	21	100
17:15	5	29	2	0	36	0	5	1	0	6	4	23	16	0	43	9	9	4	0	22	107
17:20	1	27	1	0	29	0	5	3	0	8	4	26	12	0	42	13	11	7	0	31	110
17:25	6	30	5	0	41	2	5	2	0	9	1	26	12	0	39	9	5	7	0	21	110
17:30	5	14	1	0	20	1	4	3	0	8	5	49	15	0	69	14	7	4	0	25	122
17:35	1	36	2	0	39	2	3	5	0	10	3	36	15	0	54	11	3	4	0	18	121
17:40	3	16	2	0	21	1	2	4	0	7	1	14	11	0	26	9	8	5	0	22	76
17:45	3	34	2	0	39	1	3	8	0	12	1	29	16	0	46	10	4	3	0	17	114
17:50	3	30	1	0	34	0	1	2	0	3	3	15	16	0	34	15	2	3	0	20	91
17:55	3	29	4	0	36	2	3	3	1	9	4	20	10	0	34	8	8	4	0	20	99
Total	36	345	34	0	415	11	51	38	1	101	38	315	159	0	512	118	84	52	0	254	1282
Grand Total	113	934	92	0	1139	65	296	225	1	587	115	835	446	0	1396	403	310	133	0	846	3968
Apprch %	9.9	82	8.1	0		11.1	50.4	38.3	0.2		8.2	59.8	31.9	0		47.6	36.6	15.7	0		
Total %	2.8	23.5	2.3	0	28.7	1.6	7.5	5.7	0	14.8	2.9	21	11.2	0	35.2	10.2	7.8	3.4	0	21.3	

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Hwy 83 - Walker Rd PM 5-13-25

Site Code : 00000000

Start Date : 5/13/2025

Page No : 2

	Hwy 83 Southbound					Walker Rd Westbound					Hwy 83 Northbound					Hwy 105 Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 15:00 to 17:55 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 15:25																					
15:25	2	19	1	0	22	1	5	2	0	8	2	21	14	0	37	10	15	9	0	34	101
15:30	1	24	4	0	29	1	6	6	0	13	5	14	17	0	36	13	15	1	0	29	107
15:35	5	27	5	0	37	7	21	18	0	46	10	23	6	0	39	13	20	3	0	36	158
15:40	2	26	7	0	35	0	39	13	0	52	5	26	11	0	42	12	7	1	0	20	149
15:45	4	20	3	0	27	6	29	24	0	59	3	17	7	0	27	12	8	6	0	26	139
15:50	3	38	4	0	45	8	27	24	0	59	3	22	16	0	41	13	17	2	0	32	177
15:55	5	23	3	0	31	7	18	9	0	34	0	10	12	0	22	13	6	1	0	20	107
16:00	5	17	0	0	22	3	13	15	0	31	7	28	17	0	52	18	6	6	0	30	135
16:05	3	28	1	0	32	5	6	17	0	28	1	15	8	0	24	10	6	3	0	19	103
16:10	4	37	1	0	42	1	4	6	0	11	2	29	11	0	42	19	5	2	0	26	121
16:15	0	19	2	0	21	2	7	6	0	15	1	27	19	0	47	8	4	5	0	17	100
16:20	6	34	0	0	40	0	4	8	0	12	3	28	10	0	41	10	7	2	0	19	112
Total Volume	40	312	31	0	383	41	179	148	0	368	42	260	148	0	450	151	116	41	0	308	1509
% App. Total	10.4	81.5	8.1	0		11.1	48.6	40.2	0		9.3	57.8	32.9	0		49	37.7	13.3	0		
PHF	.556	.684	.369	.000	.709	.427	.382	.514	.000	.520	.350	.747	.649	.000	.721	.662	.483	.380	.000	.713	.710

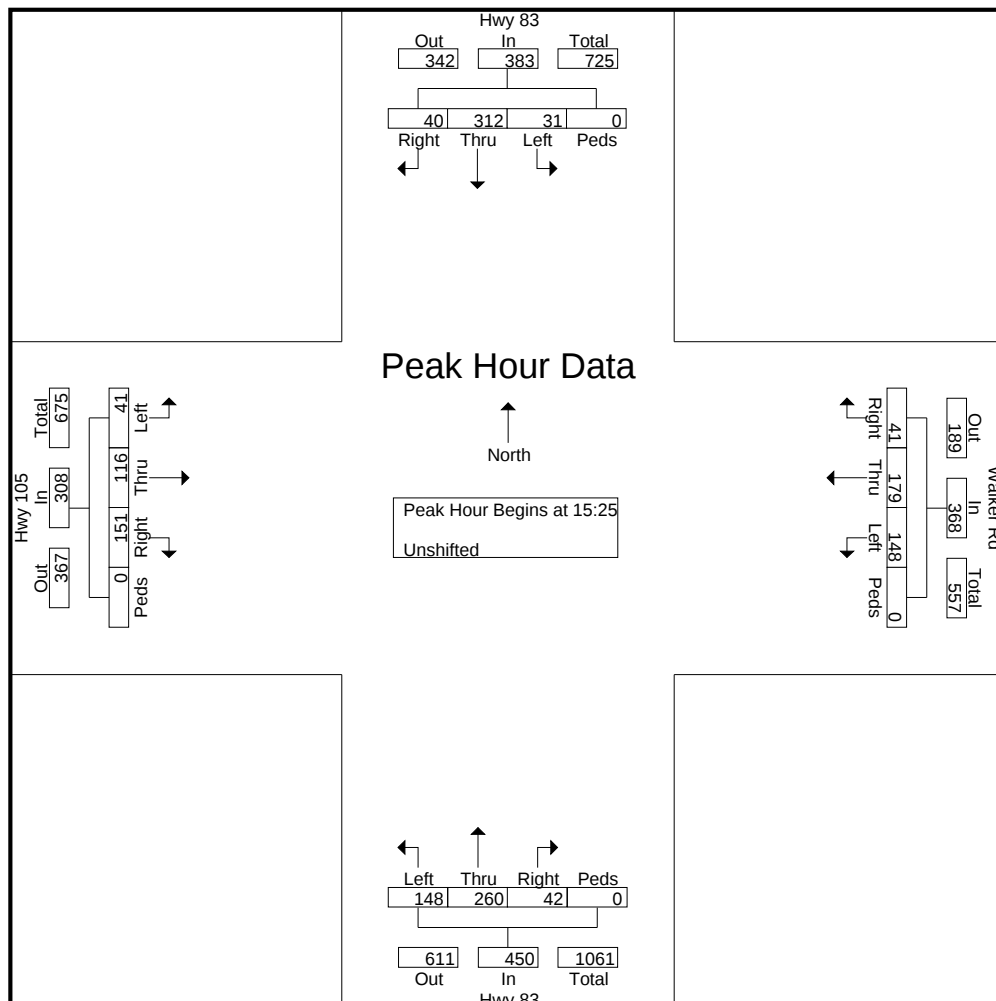

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Hwy 83 - Walker Rd PM 5-13-25

Site Code : 00000000

Start Date : 5/13/2025


Page No : 3

	Hwy 83 Southbound					Walker Rd Westbound					Hwy 83 Northbound					Hwy 105 Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total

Peak Hour Analysis From 15:00 to 17:55 - Peak 1 of 1

Peak Hour for Each Approach Begins at:

	16:40					15:30					16:50					15:05				
+0 mins.	3	31	2	0	36	1	6	6	0	13	6	19	18	0	43	14	10	4	0	28
+5 mins.	7	22	1	0	30	7	21	18	0	46	0	26	10	0	36	7	19	4	0	30
+10 mins.	1	28	1	0	30	0	39	13	0	52	5	23	11	0	39	8	13	6	0	27
+15 mins.	2	36	2	0	40	6	29	24	0	59	5	38	13	0	56	14	11	2	0	27
+20 mins.	1	30	0	0	31	8	27	24	0	59	2	16	12	0	30	10	15	9	0	34
+25 mins.	2	41	8	0	51	7	18	9	0	34	4	23	16	0	43	13	15	1	0	29
+30 mins.	3	29	6	0	38	3	13	15	0	31	4	26	12	0	42	13	20	3	0	36
+35 mins.	5	29	2	0	36	5	6	17	0	28	1	26	12	0	39	12	7	1	0	20
+40 mins.	1	27	1	0	29	1	4	6	0	11	5	49	15	0	69	12	8	6	0	26
+45 mins.	6	30	5	0	41	2	7	6	0	15	3	36	15	0	54	13	17	2	0	32
+50 mins.	5	14	1	0	20	0	4	8	0	12	1	14	11	0	26	13	6	1	0	20
+55 mins.	1	36	2	0	39	2	1	6	0	9	1	29	16	0	46	18	6	6	0	30
Total Volume	37	353	31	0	421	42	175	152	0	369	37	325	161	0	523	147	147	45	0	339
% App. Total	8.8	83.8	7.4	0		11.4	47.4	41.2	0		7.1	62.1	30.8	0		43.4	43.4	13.3	0	
PHF	.440	.717	.323	.000	.688	.438	.374	.528	.000	.521	.514	.553	.745	.000	.632	.681	.613	.417	.000	.785

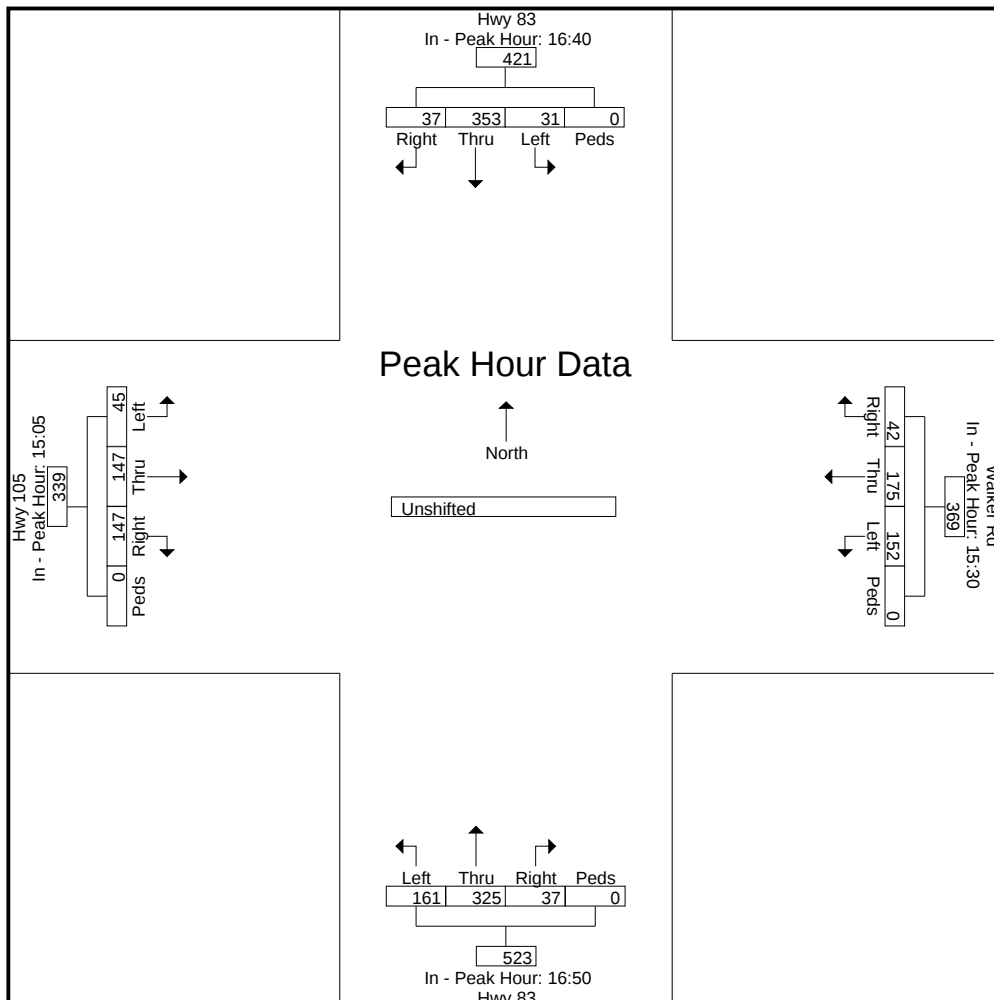

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Jane Lundeen Dr - Pinehurst Cir AM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 1

Groups Printed- Unshifted


	Jane Lundeen Dr Southbound					Pinehurst Cir Westbound					Northbound					Pinehurst Cir Eastbound						
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total	
06:30	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1
06:35	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	3	0	0	0	3	4
*** BREAK ***																						
06:45	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	2	0	0	0	2	3
06:50	0	0	3	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
06:55	0	0	3	0	3	1	0	0	0	1	0	0	0	0	0	0	2	0	0	0	2	6
Total	0	0	7	0	7	2	0	0	0	2	0	0	0	0	0	0	8	0	0	0	8	17
07:00	0	0	2	0	2	1	0	0	0	1	0	0	0	0	0	0	1	0	0	0	1	4
07:05	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	5	0	0	0	5	8
07:10	0	0	10	0	10	5	0	0	0	5	0	0	0	0	0	0	4	0	0	0	4	19
07:15	0	0	11	0	11	5	0	0	0	5	0	0	0	0	0	0	4	0	0	0	4	20
07:20	0	0	14	0	14	14	0	0	0	14	0	0	0	0	0	0	14	0	0	0	14	42
07:25	0	0	27	0	27	27	0	0	0	27	0	0	0	0	0	0	11	0	0	0	11	65
07:30	0	0	38	1	39	43	0	0	0	43	0	0	0	0	0	0	30	0	0	0	30	112
07:35	0	0	34	0	34	52	0	0	0	52	0	0	0	0	0	0	24	0	0	0	24	110
07:40	0	0	23	0	23	53	0	0	0	53	0	0	0	0	0	0	20	0	0	0	20	96
07:45	0	0	12	0	12	49	0	0	0	49	0	0	0	0	0	0	7	0	0	0	7	68
07:50	0	0	5	0	5	14	0	0	0	14	0	0	0	0	0	0	1	0	0	0	1	20
07:55	0	0	0	0	0	2	0	0	0	2	0	0	0	0	0	0	1	0	0	0	1	3
Total	0	0	177	1	178	267	0	0	0	267	0	0	0	0	0	0	122	0	0	0	122	567
08:00	0	0	0	0	0	2	0	0	0	2	0	0	0	0	0	0	1	0	0	0	1	3
08:05	0	0	2	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
08:10	0	0	2	0	2	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	3
08:15	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	1	0	0	0	1	4
08:20	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	1	0	0	0	1	2
08:25	0	0	1	0	1	1	0	0	0	1	0	0	0	0	0	0	1	0	0	0	1	3
Grand Total	0	0	190	1	191	276	0	0	0	276	0	0	0	0	0	0	134	0	0	0	134	601
Apprch %	0	0	99.5	0.5		100	0	0	0		0	0	0	0		0	100	0	0			
Total %	0	0	31.6	0.2	31.8	45.9	0	0	0	45.9	0	0	0	0	0	0	22.3	0	0	0	22.3	

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Jane Lundeen Dr - Pinehurst Cir AM 10-15-25 Site
Code : S214070
Start Date : 10/15/2025
Page No : 2

	Jane Lundeen Dr Southbound					Pinehurst Cir Westbound					Northbound					Pinehurst Cir Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 06:30 to 08:25 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 06:55																					
06:55	0	0	3	0	3	1	0	0	0	1	0	0	0	0	0	0	2	0	0	2	6
07:00	0	0	2	0	2	1	0	0	0	1	0	0	0	0	0	0	1	0	0	1	4
07:05	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	5	0	0	5	8
07:10	0	0	10	0	10	5	0	0	0	5	0	0	0	0	0	0	4	0	0	4	19
07:15	0	0	11	0	11	5	0	0	0	5	0	0	0	0	0	0	4	0	0	4	20
07:20	0	0	14	0	14	14	0	0	0	14	0	0	0	0	0	0	14	0	0	14	42
07:25	0	0	27	0	27	27	0	0	0	27	0	0	0	0	0	0	11	0	0	11	65
07:30	0	0	38	1	39	43	0	0	0	43	0	0	0	0	0	0	30	0	0	30	112
07:35	0	0	34	0	34	52	0	0	0	52	0	0	0	0	0	0	24	0	0	24	110
07:40	0	0	23	0	23	53	0	0	0	53	0	0	0	0	0	0	20	0	0	20	96
07:45	0	0	12	0	12	49	0	0	0	49	0	0	0	0	0	0	7	0	0	7	68
07:50	0	0	5	0	5	14	0	0	0	14	0	0	0	0	0	0	1	0	0	1	20
Total Volume	0	0	180	1	181	266	0	0	0	266	0	0	0	0	0	0	123	0	0	123	570
% App. Total	0	0	99.4	0.6		100	0	0	0		0	0	0	0		0	100	0	0		
PHF	.000	.000	.395	.083	.387	.418	.000	.000	.000	.418	.000	.000	.000	.000	.000	.000	.342	.000	.000	.342	.424

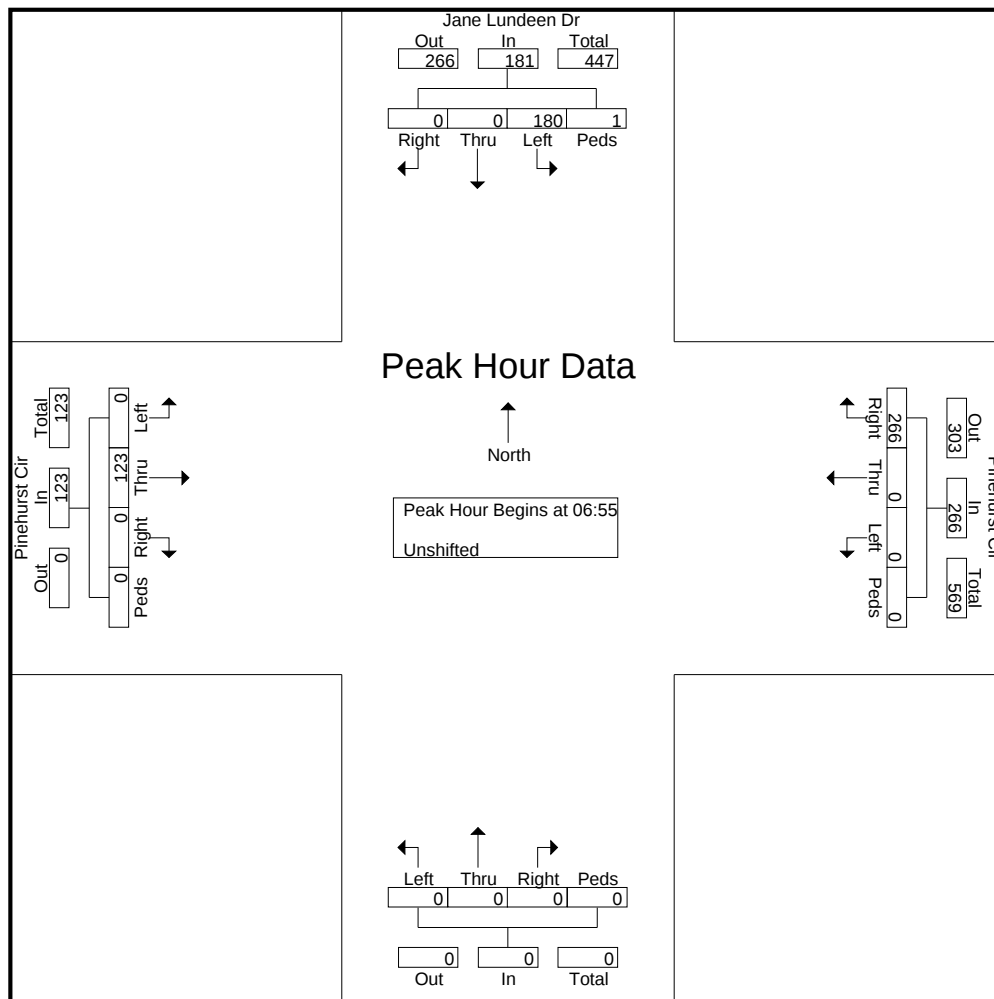

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Jane Lundeen Dr - Pinehurst Cir AM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 3

	Jane Lundeen Dr Southbound					Pinehurst Cir Westbound					Northbound					Pinehurst Cir Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 06:30 to 08:25 - Peak 1 of 1																					
Peak Hour for Each Approach Begins at:																					
	06:55					07:05					06:30					06:55					
+0 mins.	0	0	3	0	3	2	0	0	0	2	0	0	0	0	0	0	2	0	0	0	2
+5 mins.	0	0	2	0	2	5	0	0	0	5	0	0	0	0	0	0	1	0	0	0	1
+10 mins.	0	0	1	0	1	5	0	0	0	5	0	0	0	0	0	0	5	0	0	0	5
+15 mins.	0	0	10	0	10	14	0	0	0	14	0	0	0	0	0	0	4	0	0	0	4
+20 mins.	0	0	11	0	11	27	0	0	0	27	0	0	0	0	0	0	4	0	0	0	4
+25 mins.	0	0	14	0	14	43	0	0	0	43	0	0	0	0	0	0	14	0	0	0	14
+30 mins.	0	0	27	0	27	52	0	0	0	52	0	0	0	0	0	0	11	0	0	0	11
+35 mins.	0	0	38	1	39	53	0	0	0	53	0	0	0	0	0	0	30	0	0	0	30
+40 mins.	0	0	34	0	34	49	0	0	0	49	0	0	0	0	0	0	24	0	0	0	24
+45 mins.	0	0	23	0	23	14	0	0	0	14	0	0	0	0	0	0	20	0	0	0	20
+50 mins.	0	0	12	0	12	2	0	0	0	2	0	0	0	0	0	0	7	0	0	0	7
+55 mins.	0	0	5	0	5	2	0	0	0	2	0	0	0	0	0	0	1	0	0	0	1
Total Volume	0	0	180	1	181	268	0	0	0	268	0	0	0	0	0	0	123	0	0	0	123
% App. Total	0	0	99.4	0.6		100	0	0	0		0	0	0	0		0	100	0	0		
PHF	.000	.000	.395	.083	.387	.421	.000	.000	.000	.421	.000	.000	.000	.000	.000	.000	.342	.000	.000	.342	

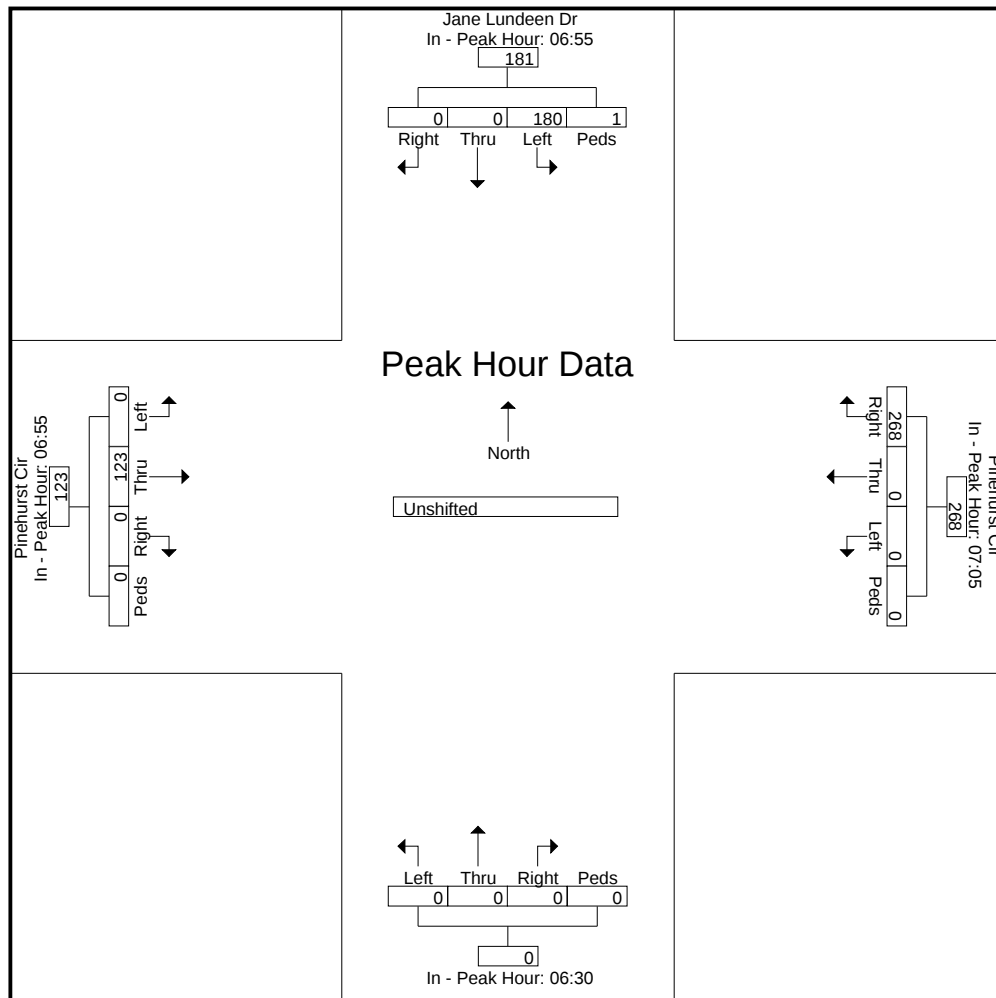

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Jane Lundeen Dr - Pinehurst Cir PM 10-15-25 Site

Code : S214070

Start Date : 10/14/2025

Page No : 1

Groups Printed- Unshifted

	Jane Lundeen Dr Southbound					Pinehurst Cir Westbound					Northbound					Pinehurst Cir Eastbound						
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total	
15:00	0	0	5	0	5	1	0	0	0	1	0	0	0	0	0	0	2	0	0	0	2	8
15:05	0	0	7	0	7	0	0	0	0	0	0	0	0	0	0	0	5	0	0	0	5	12
15:10	0	0	18	0	18	0	0	0	0	0	0	0	0	0	0	0	8	0	0	0	8	26
15:15	0	0	11	0	11	3	0	0	0	3	0	0	0	0	0	0	10	0	0	0	10	24
15:20	0	0	12	0	12	2	0	0	0	2	0	0	0	0	0	0	8	0	0	0	8	22
15:25	0	0	24	0	24	2	0	0	0	2	0	0	0	0	0	0	5	0	0	0	5	31
15:30	0	0	10	0	10	31	0	0	0	31	0	0	0	0	0	0	5	0	0	0	5	46
15:35	0	0	18	0	18	54	0	0	0	54	0	0	0	0	0	0	1	0	0	0	1	73
15:40	0	0	16	0	16	70	0	0	0	70	0	0	0	0	0	0	5	0	0	0	5	91
15:45	0	0	16	0	16	42	0	0	0	42	0	0	0	0	0	0	4	0	0	0	4	62
15:50	0	0	6	0	6	30	0	0	0	30	0	0	0	0	0	0	1	0	0	0	1	37
15:55	0	0	5	0	5	4	0	0	0	4	0	0	0	0	0	0	0	0	0	0	0	9
Total	0	0	148	0	148	239	0	0	0	239	0	0	0	0	0	0	54	0	0	0	54	441
16:00	0	0	2	0	2	8	0	0	0	8	0	0	0	0	0	0	0	0	0	0	0	10
16:05	0	0	4	0	4	6	0	0	0	6	0	0	0	0	0	0	4	0	0	0	4	14
16:10	0	0	2	0	2	5	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	7
16:15	0	0	1	0	1	3	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	4
16:20	0	0	0	0	0	3	0	0	0	3	0	0	0	0	0	0	1	0	0	0	1	4
16:25	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	3
16:30	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	1	0	0	0	1	4
16:35	0	0	2	0	2	4	0	0	0	4	0	0	0	0	0	0	0	0	0	0	0	6
16:40	0	0	1	0	1	1	0	0	0	1	0	0	0	0	0	0	1	0	0	0	1	3
*** BREAK ***																						
16:50	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	3
16:55	0	0	2	0	2	2	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	4
Total	0	0	17	0	17	38	0	0	0	38	0	0	0	0	0	0	7	0	0	0	7	62
17:00	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	1
17:05	0	0	3	0	3	4	0	0	0	4	0	0	0	0	0	0	3	0	0	0	3	10
17:10	0	0	8	0	8	5	0	0	0	5	0	0	0	0	0	0	2	0	0	0	2	15
17:15	0	0	7	0	7	15	0	0	0	15	0	0	0	0	0	0	3	0	0	0	3	25
17:20	0	0	4	0	4	9	0	0	0	9	0	0	0	0	0	0	3	0	0	0	3	16
17:25	0	0	8	0	8	2	0	0	0	2	0	0	0	0	0	0	2	0	0	0	2	12
17:30	0	0	4	0	4	3	0	0	0	3	0	0	0	0	0	0	1	0	0	0	1	8
17:35	0	0	2	0	2	13	0	0	0	13	0	0	0	0	0	0	1	0	0	0	1	16
17:40	0	0	0	0	0	14	0	0	0	14	0	0	0	0	0	0	0	0	0	0	0	14
17:45	0	0	0	0	0	2	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	2
*** BREAK ***																						
Total	0	0	36	0	36	68	0	0	0	68	0	0	0	0	0	0	15	0	0	0	15	119
Grand Total	0	0	201	0	201	345	0	0	0	345	0	0	0	0	0	0	76	0	0	0	76	622
Apprch %	0	0	100	0		100	0	0	0		0	0	0	0		0	100	0	0			
Total %	0	0	32.3	0	32.3	55.5	0	0	0	55.5	0	0	0	0	0	0	12.2	0	0	0	12.2	

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304

Colorado Springs, CO 80909

719-633-2868


File Name : Jane Lundeen Dr - Pinehurst Cir PM 10-15-25 Site

Code : S214070

Start Date : 10/14/2025

Page No : 2

	Jane Lundeen Dr Southbound					Pinehurst Cir Westbound					Northbound					Pinehurst Cir Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 15:00 to 17:55 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 15:10																					
15:10	0	0	18	0	18	0	0	0	0	0	0	0	0	0	0	0	8	0	0	8	26
15:15	0	0	11	0	11	3	0	0	0	3	0	0	0	0	0	0	10	0	0	10	24
15:20	0	0	12	0	12	2	0	0	0	2	0	0	0	0	0	0	8	0	0	8	22
15:25	0	0	24	0	24	2	0	0	0	2	0	0	0	0	0	0	5	0	0	5	31
15:30	0	0	10	0	10	31	0	0	0	31	0	0	0	0	0	0	5	0	0	5	46
15:35	0	0	18	0	18	54	0	0	0	54	0	0	0	0	0	0	1	0	0	1	73
15:40	0	0	16	0	16	70	0	0	0	70	0	0	0	0	0	0	5	0	0	5	91
15:45	0	0	16	0	16	42	0	0	0	42	0	0	0	0	0	0	4	0	0	4	62
15:50	0	0	6	0	6	30	0	0	0	30	0	0	0	0	0	0	1	0	0	1	37
15:55	0	0	5	0	5	4	0	0	0	4	0	0	0	0	0	0	0	0	0	0	9
16:00	0	0	2	0	2	8	0	0	0	8	0	0	0	0	0	0	0	0	0	0	10
16:05	0	0	4	0	4	6	0	0	0	6	0	0	0	0	0	0	4	0	0	4	14
Total Volume	0	0	142	0	142	252	0	0	0	252	0	0	0	0	0	0	51	0	0	51	445
% App. Total	0	0	100	0		100	0	0	0		0	0	0	0		0	100	0	0		
PHF	.000	.000	.493	.000	.493	.300	.000	.000	.000	.300	.000	.000	.000	.000	.000	.000	.425	.000	.000	.425	.408

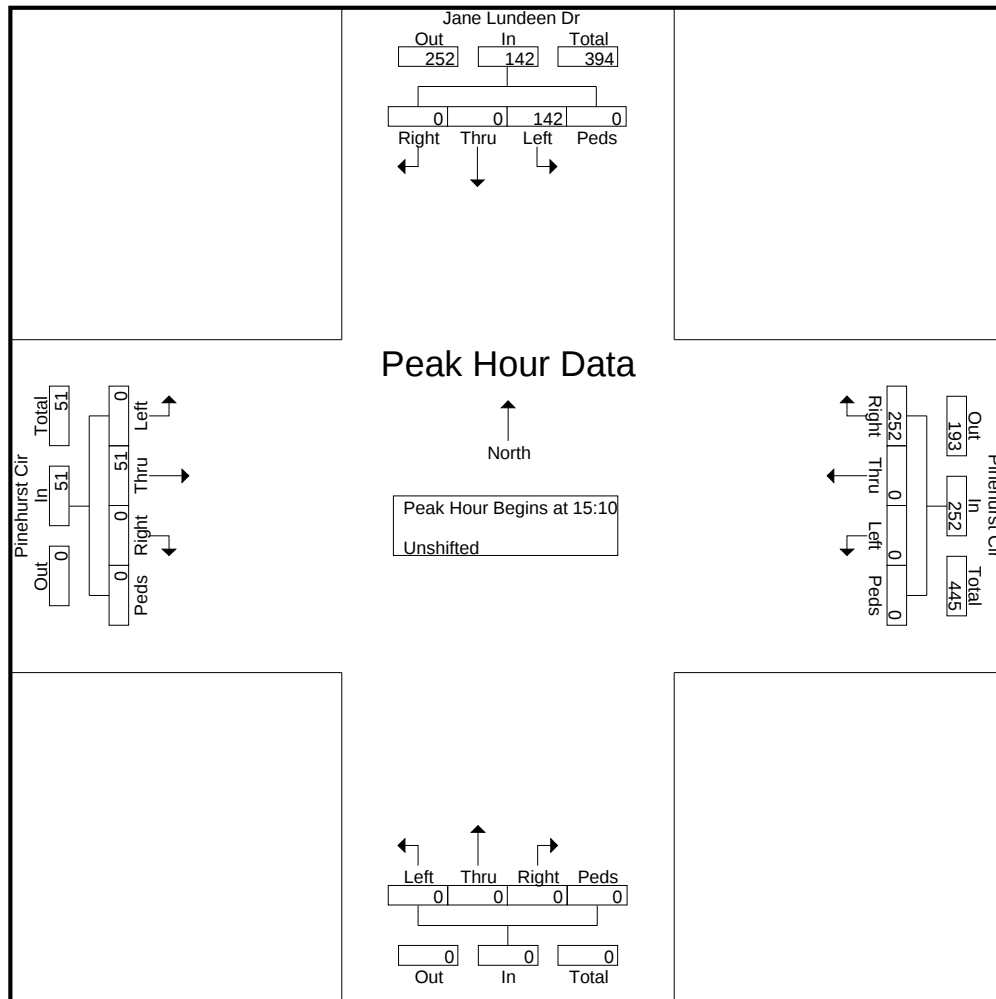

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Jane Lundeen Dr - Pinehurst Cir PM 10-15-25 Site
Code : S214070
Start Date : 10/14/2025
Page No : 3

	Jane Lundeen Dr Southbound					Pinehurst Cir Westbound					Northbound					Pinehurst Cir Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total

Peak Hour Analysis From 15:00 to 17:55 - Peak 1 of 1

Peak Hour for Each Approach Begins at:

	15:00					15:25					15:00					15:00				
+0 mins.	0	0	5	0	5	2	0	0	0	2	0	0	0	0	0	0	2	0	0	2
+5 mins.	0	0	7	0	7	31	0	0	0	31	0	0	0	0	0	0	5	0	0	5
+10 mins.	0	0	18	0	18	54	0	0	0	54	0	0	0	0	0	0	8	0	0	8
+15 mins.	0	0	11	0	11	70	0	0	0	70	0	0	0	0	0	0	10	0	0	10
+20 mins.	0	0	12	0	12	42	0	0	0	42	0	0	0	0	0	0	8	0	0	8
+25 mins.	0	0	24	0	24	30	0	0	0	30	0	0	0	0	0	0	5	0	0	5
+30 mins.	0	0	10	0	10	4	0	0	0	4	0	0	0	0	0	0	5	0	0	5
+35 mins.	0	0	18	0	18	8	0	0	0	8	0	0	0	0	0	0	1	0	0	1
+40 mins.	0	0	16	0	16	6	0	0	0	6	0	0	0	0	0	0	5	0	0	5
+45 mins.	0	0	16	0	16	5	0	0	0	5	0	0	0	0	0	0	4	0	0	4
+50 mins.	0	0	6	0	6	3	0	0	0	3	0	0	0	0	0	0	1	0	0	1
+55 mins.	0	0	5	0	5	3	0	0	0	3	0	0	0	0	0	0	0	0	0	0
Total Volume	0	0	148	0	148	258	0	0	0	258	0	0	0	0	0	0	54	0	0	54
% App. Total	0	0	100	0		100	0	0	0		0	0	0	0		0	100	0	0	
PHF	.000	.000	.514	.000	.514	.307	.000	.000	.000	.307	.000	.000	.000	.000	.000	.000	.450	.000	.000	.450

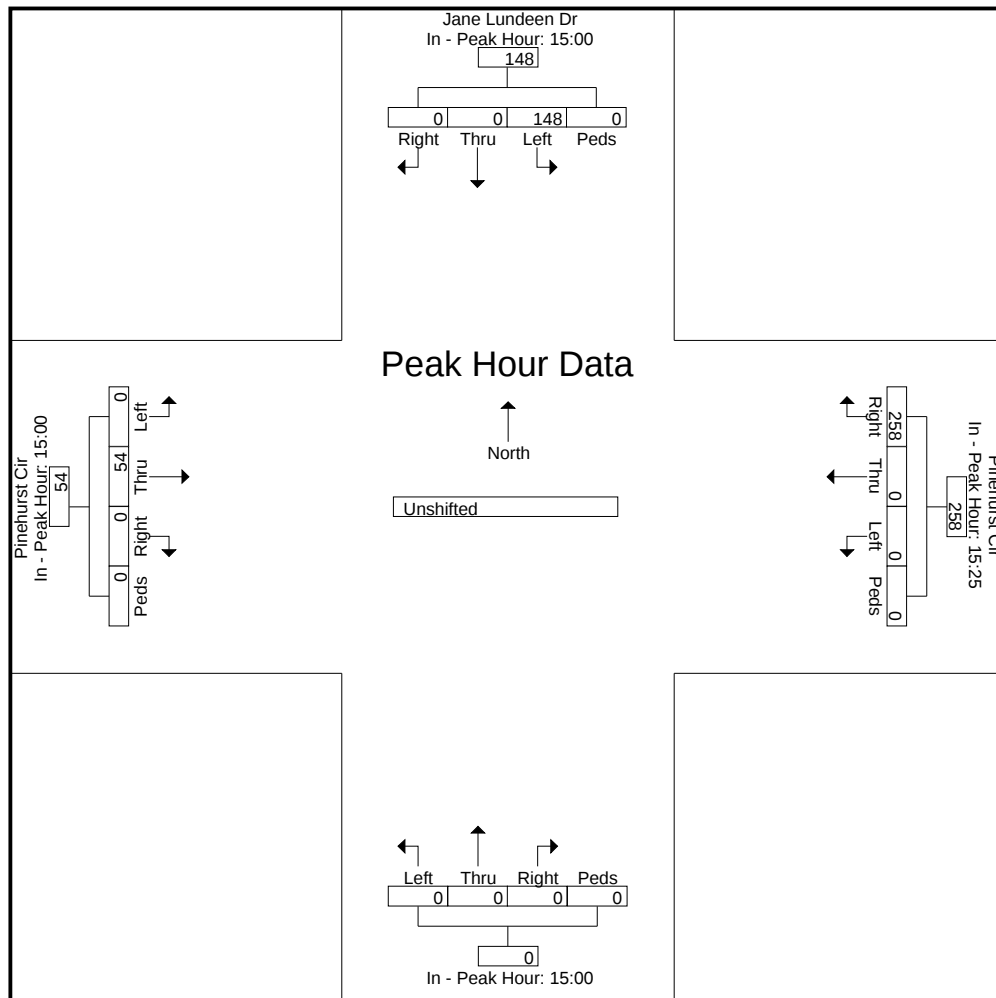

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Jane Lundeen Dr - Walker Rd AM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 1

Groups Printed- Unshifted

	Southbound					Walker Rd Westbound					Jane Lundeen Dr Northbound					Walker Rd Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
06:30	0	0	0	0	0	0	14	0	0	14	0	0	1	0	1	0	2	0	0	2	17
06:45	0	0	0	0	0	0	28	2	0	30	0	0	0	0	0	5	7	0	0	12	42
Total	0	0	0	0	0	0	42	2	0	44	0	0	1	0	1	5	9	0	0	14	59
07:00	0	0	0	0	0	0	31	0	0	31	0	0	6	0	6	9	6	0	0	15	52
07:15	0	0	0	0	0	5	34	1	0	40	1	0	38	0	39	53	11	0	0	64	143
07:30	0	0	0	0	0	0	14	4	0	18	3	0	149	0	152	99	17	0	5	121	291
07:45	0	0	0	0	0	0	27	1	0	28	1	0	78	0	79	14	26	0	0	40	147
Total	0	0	0	0	0	5	106	6	0	117	5	0	271	0	276	175	60	0	5	240	633
08:00	0	0	0	0	0	0	27	1	0	28	0	0	3	0	3	3	17	0	0	20	51
08:15	0	0	0	0	0	0	16	0	0	16	1	0	4	0	5	2	16	0	0	18	39
Grand Total	0	0	0	0	0	5	191	9	0	205	6	0	279	0	285	185	102	0	5	292	782
Apprch %	0	0	0	0		2.4	93.2	4.4	0		2.1	0	97.9	0		63.4	34.9	0	1.7		
Total %	0	0	0	0	0	0.6	24.4	1.2	0	26.2	0.8	0	35.7	0	36.4	23.7	13	0	0.6	37.3	

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Jane Lundeen Dr - Walker Rd AM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 2

	Southbound					Walker Rd Westbound					Jane Lundeen Dr Northbound					Walker Rd Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 06:30 to 08:15 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:00																					
07:00	0	0	0	0	0	0	31	0	0	31	0	0	6	0	6	9	6	0	0	15	52
07:15	0	0	0	0	0	5	34	1	0	40	1	0	38	0	39	53	11	0	0	64	143
07:30	0	0	0	0	0	0	14	4	0	18	3	0	149	0	152	99	17	0	5	121	291
07:45	0	0	0	0	0	0	27	1	0	28	1	0	78	0	79	14	26	0	0	40	147
Total Volume	0	0	0	0	0	5	106	6	0	117	5	0	271	0	276	175	60	0	5	240	633
% App. Total	0	0	0	0		4.3	90.6	5.1	0		1.8	0	98.2	0		72.9	25	0	2.1		
PHF	.000	.000	.000	.000	.000	.250	.779	.375	.000	.731	.417	.000	.455	.000	.454	.442	.577	.000	.250	.496	.544

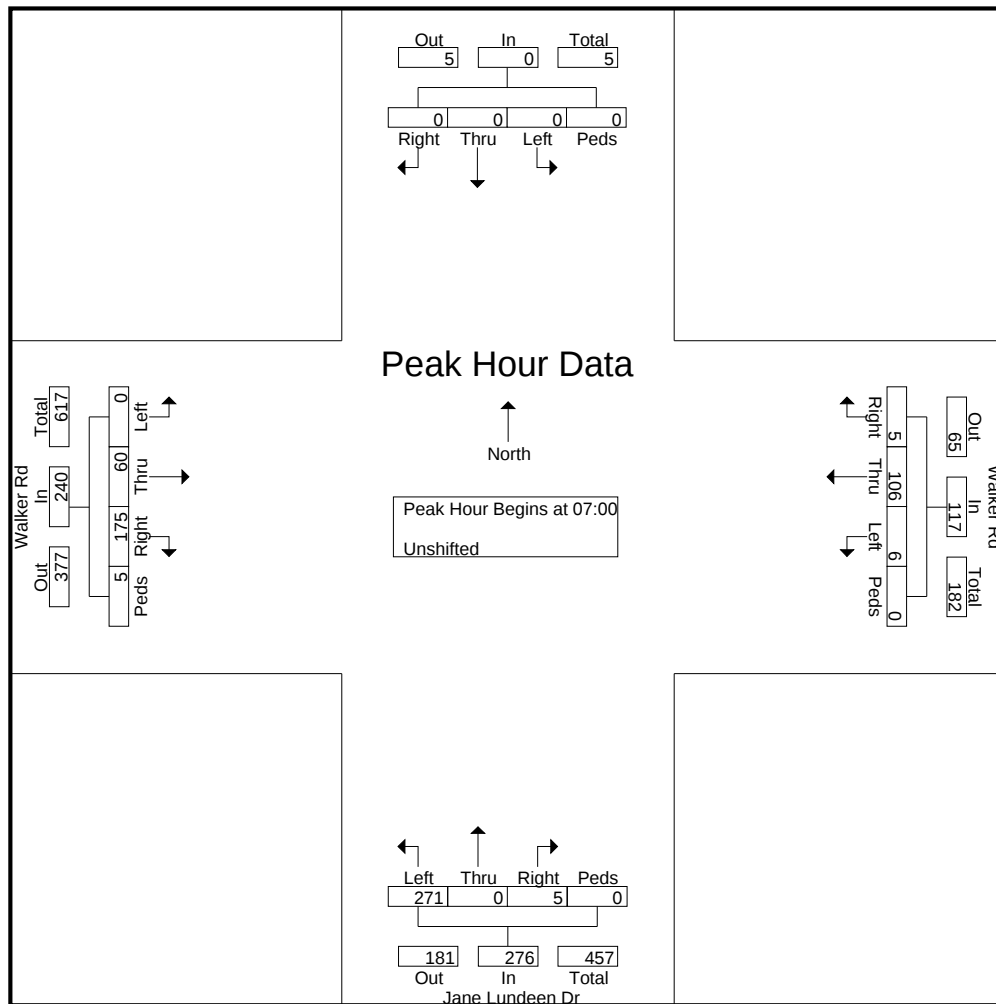

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Jane Lundeen Dr - Walker Rd AM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 3

	Southbound					Walker Rd Westbound					Jane Lundeen Dr Northbound					Walker Rd Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 06:30 to 08:15 - Peak 1 of 1																					
Peak Hour for Each Approach Begins at:																					
	06:30					06:45					07:00					07:15					
+0 mins.	0	0	0	0	0	0	28	2	0	30	0	0	6	0	6	53	11	0	0	64	
+15 mins.	0	0	0	0	0	0	31	0	0	31	1	0	38	0	39	99	17	0	5	121	
+30 mins.	0	0	0	0	0	5	34	1	0	40	3	0	149	0	152	14	26	0	0	40	
+45 mins.	0	0	0	0	0	0	14	4	0	18	1	0	78	0	79	3	17	0	0	20	
Total Volume	0	0	0	0	0	5	107	7	0	119	5	0	271	0	276	169	71	0	5	245	
% App. Total	0	0	0	0		4.2	89.9	5.9	0		1.8	0	98.2	0		69	29	0	2		
PHF	.000	.000	.000	.000	.000	.250	.787	.438	.000	.744	.417	.000	.455	.000	.454	.427	.683	.000	.250	.506	

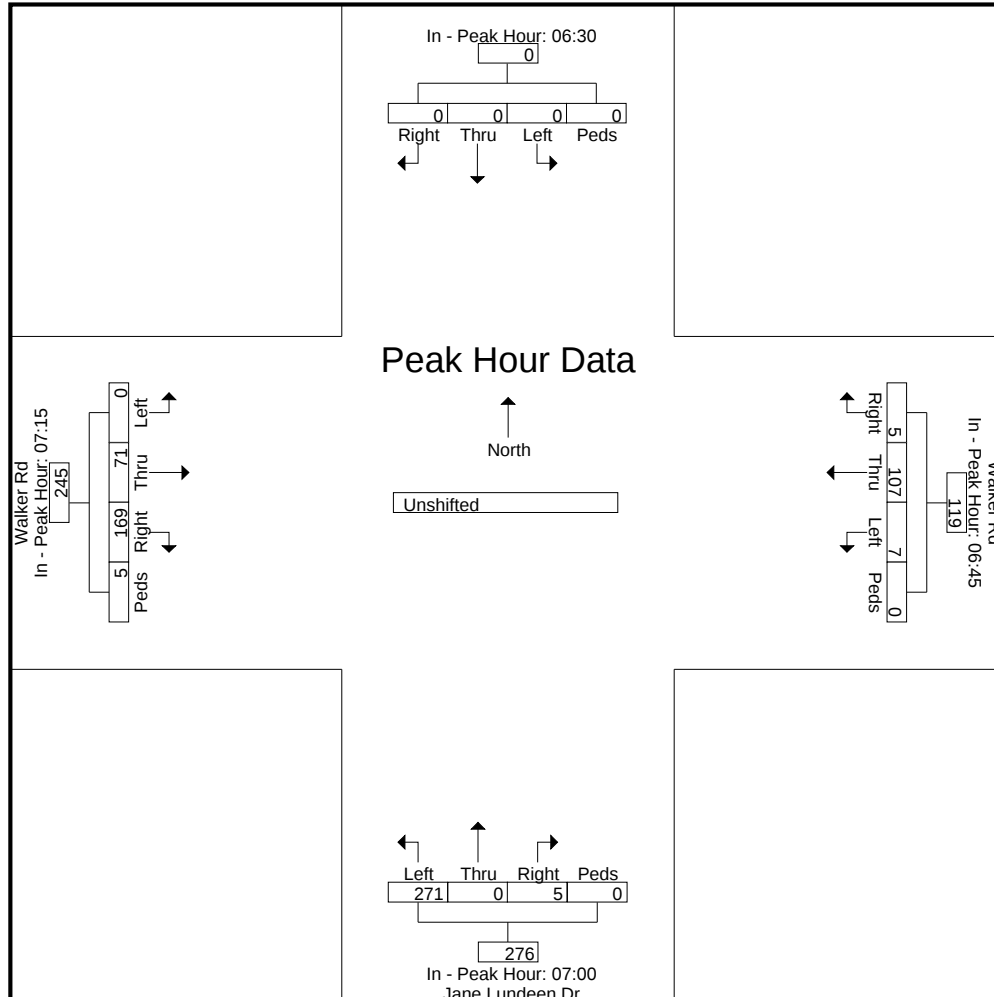

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868

File Name : Jane Lundeen Dr - Walker Rd PM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 1

Groups Printed- Unshifted

	Southbound					Walker Rd Westbound					Jane Lundeen Dr Northbound					Walker Rd Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
15:00	0	0	0	0	0	0	17	2	0	19	0	0	1	0	1	22	17	0	0	39	59
15:15	0	0	0	0	0	0	22	3	0	25	1	0	5	0	6	41	38	0	0	79	110
15:30	0	0	0	0	0	0	18	0	0	18	7	0	128	0	135	58	34	0	5	97	250
15:45	0	0	0	0	0	0	18	0	0	18	2	0	90	0	92	26	50	0	0	76	186
Total	0	0	0	0	0	0	75	5	0	80	10	0	224	0	234	147	139	0	5	291	605
16:00	0	0	0	0	0	0	48	1	0	49	1	0	18	0	19	11	38	0	0	49	117
16:15	0	0	0	0	0	0	29	0	0	29	1	0	7	0	8	2	27	0	1	30	67
16:30	0	0	0	0	0	0	26	1	1	28	0	0	8	0	8	2	22	0	0	24	60
16:45	0	0	0	0	0	0	13	0	0	13	0	0	5	0	5	2	31	0	0	33	51
Total	0	0	0	0	0	0	116	2	1	119	2	0	38	0	40	17	118	0	1	136	295
17:00	0	0	0	0	0	0	29	0	0	29	1	0	6	0	7	10	20	0	0	30	66
17:15	0	0	0	0	0	0	23	0	0	23	0	0	29	0	29	19	24	0	0	43	95
17:30	0	0	0	0	0	0	15	0	0	15	0	0	30	0	30	5	13	0	0	18	63
17:45	0	0	0	0	0	0	16	0	0	16	0	0	3	0	3	0	27	0	0	27	46
Total	0	0	0	0	0	0	83	0	0	83	1	0	68	0	69	34	84	0	0	118	270
Grand Total	0	0	0	0	0	0	274	7	1	282	13	0	330	0	343	198	341	0	6	545	1170
Apprch %	0	0	0	0	0	0	97.2	2.5	0.4		3.8	0	96.2	0		36.3	62.6	0	1.1		
Total %	0	0	0	0	0	0	23.4	0.6	0.1	24.1	1.1	0	28.2	0	29.3	16.9	29.1	0	0.5	46.6	

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Jane Lundeen Dr - Walker Rd PM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 2

	Southbound					Walker Rd Westbound					Jane Lundeen Dr Northbound					Walker Rd Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 15:00 to 17:45 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 15:15																					
15:15	0	0	0	0	0	0	22	3	0	25	1	0	5	0	6	41	38	0	0	79	110
15:30	0	0	0	0	0	0	18	0	0	18	7	0	128	0	135	58	34	0	5	97	250
15:45	0	0	0	0	0	0	18	0	0	18	2	0	90	0	92	26	50	0	0	76	186
16:00	0	0	0	0	0	0	48	1	0	49	1	0	18	0	19	11	38	0	0	49	117
Total Volume	0	0	0	0	0	0	106	4	0	110	11	0	241	0	252	136	160	0	5	301	663
% App. Total	0	0	0	0	0	0	96.4	3.6	0		4.4	0	95.6	0		45.2	53.2	0	1.7		
PHF	.000	.000	.000	.000	.000	.000	.552	.333	.000	.561	.393	.000	.471	.000	.467	.586	.800	.000	.250	.776	.663

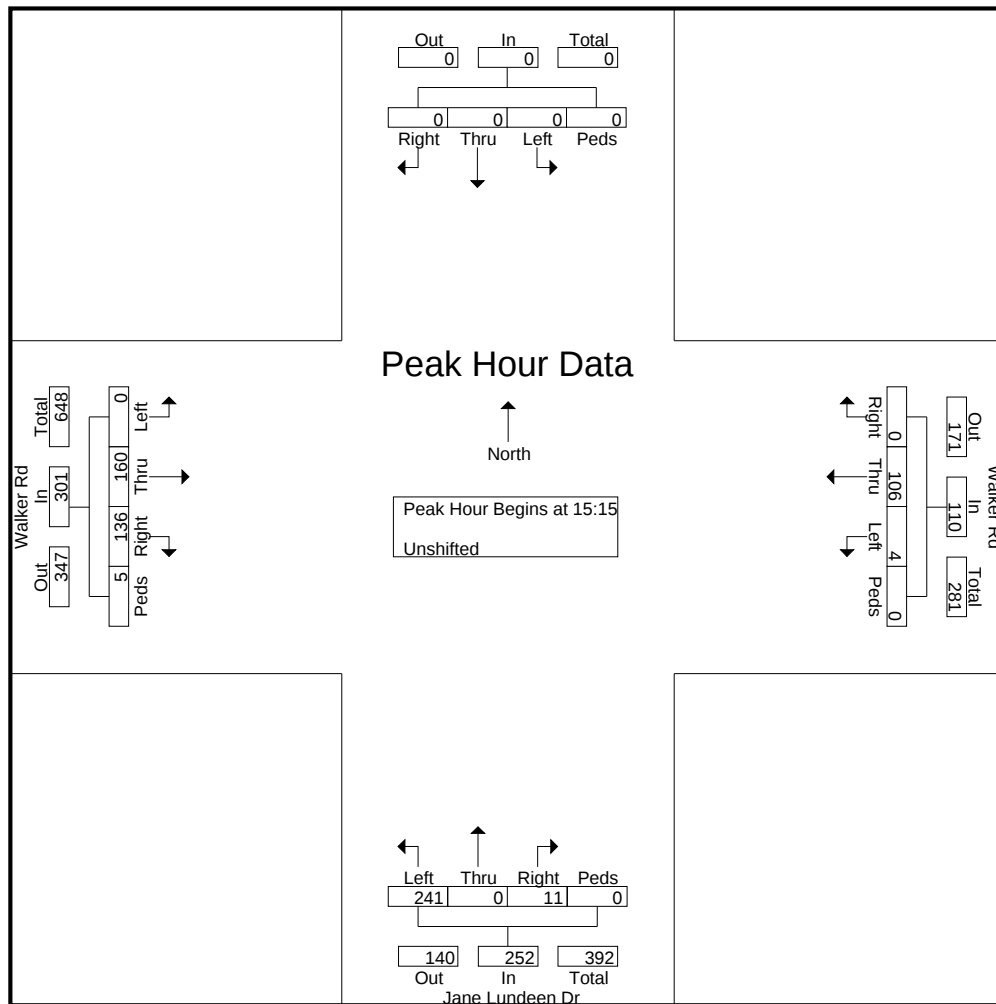

LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304
Colorado Springs, CO 80909
719-633-2868


File Name : Jane Lundeen Dr - Walker Rd PM 10-15-25 Site

Code : S214070

Start Date : 10/15/2025

Page No : 3

	Southbound					Walker Rd Westbound					Jane Lundeen Dr Northbound					Walker Rd Eastbound					
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 15:00 to 17:45 - Peak 1 of 1																					
Peak Hour for Each Approach Begins at:																					
	15:00					15:45					15:30					15:15					
+0 mins.	0	0	0	0	0	0	18	0	0	18	7	0	128	0	135	41	38	0	0	79	
+15 mins.	0	0	0	0	0	0	48	1	0	49	2	0	90	0	92	58	34	0	5	97	
+30 mins.	0	0	0	0	0	0	29	0	0	29	1	0	18	0	19	26	50	0	0	76	
+45 mins.	0	0	0	0	0	0	26	1	1	28	1	0	7	0	8	11	38	0	0	49	
Total Volume	0	0	0	0	0	0	121	2	1	124	11	0	243	0	254	136	160	0	5	301	
% App. Total	0	0	0	0		0	97.6	1.6	0.8		4.3	0	95.7	0		45.2	53.2	0	1.7		
PHF	.000	.000	.000	.000	.000	.000	.630	.500	.250	.633	.393	.000	.475	.000	.470	.586	.800	.000	.250	.776	

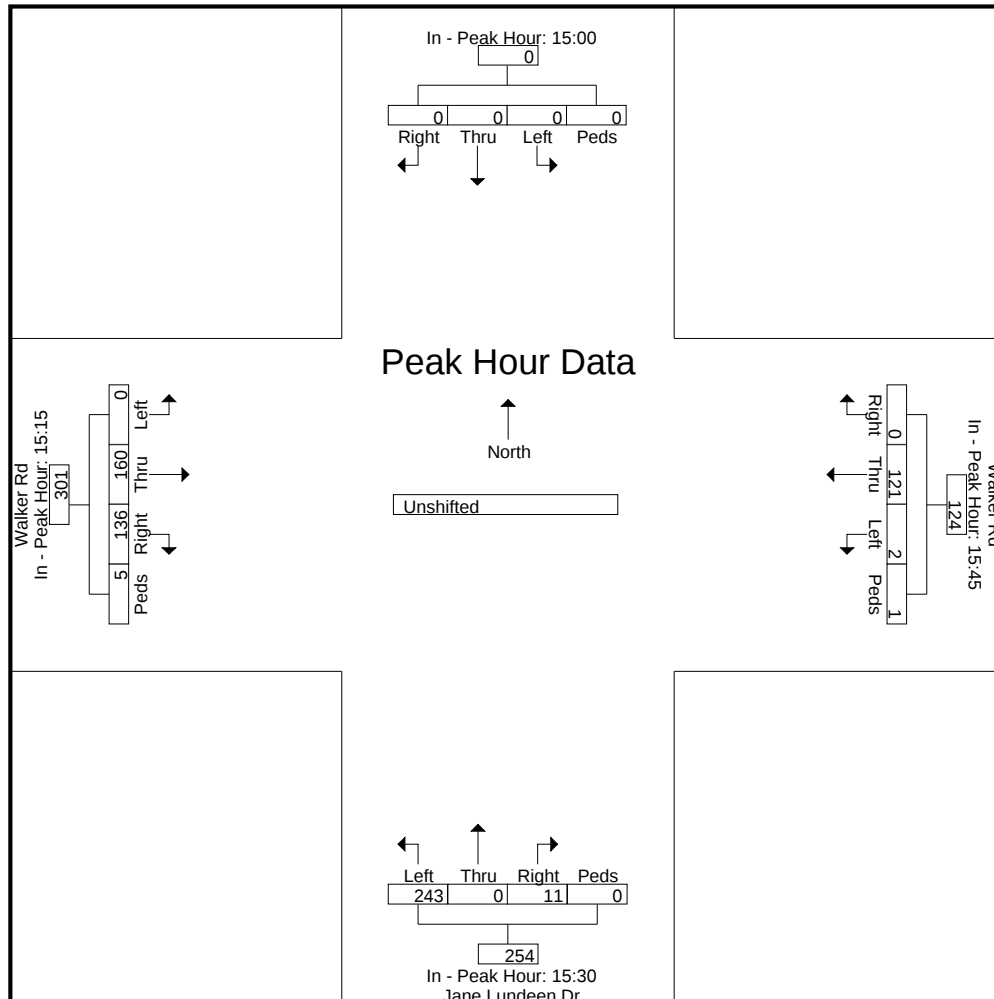

Synchro Level of Service Reports



Synchro Reports

State Highway 83 + Highway 105/Walker Road

Existing Laneage

Existing Signal Timings

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2025 Existing
2025 Existing School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	41	261	151	148	179	41	148	260	55	52	312	40
Future Volume (vph)	41	261	151	148	179	41	148	260	55	52	312	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.981				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1827	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.320			0.243			0.427			0.575		
Satd. Flow (perm)	596	1863	1583	453	1827	0	795	1863	1583	1071	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		6				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	1.00	0.83	1.00	0.67	0.50	0.79	1.00	0.98	0.58	0.52	1.00	0.93
Adj. Flow (vph)	41	314	151	221	358	52	148	265	95	100	312	43
Shared Lane Traffic (%)												
Lane Group Flow (vph)	41	314	151	221	410	0	148	265	95	100	312	43
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2025 Existing
2025 Existing School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	22.5		10.0	22.5		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	29.3	21.2	102.0	38.3	30.4		50.5	40.1	40.1	46.7	36.2	36.2
Actuated g/C Ratio	0.29	0.21	1.00	0.38	0.30		0.50	0.39	0.39	0.46	0.35	0.35
v/c Ratio	0.16	0.81	0.10	0.69	0.75		0.30	0.36	0.14	0.18	0.47	0.07
Control Delay	21.9	55.5	0.1	35.4	43.3		15.6	26.4	2.3	14.6	29.9	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	21.9	55.5	0.1	35.4	43.3		15.6	26.4	2.3	14.6	29.9	0.2
LOS	C	E	A	D	D		B	C	A	B	C	A
Approach Delay		36.3			40.5			18.7			23.7	
Approach LOS		D			D			B			C	
Queue Length 50th (ft)	17	197	0	101	254		50	129	0	33	161	0
Queue Length 95th (ft)	40	272	0	116	181		91	218	0	36	261	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	339	477	1583	325	549		516	733	701	610	661	645
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.12	0.66	0.10	0.68	0.75		0.29	0.36	0.14	0.16	0.47	0.07

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 102

Natural Cycle: 80

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.81

Intersection Signal Delay: 30.6


Intersection LOS: C

Intersection Capacity Utilization 74.3%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd

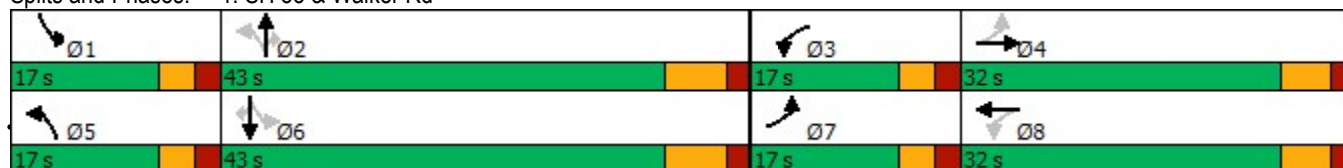

Lanes, Volumes, Timings

JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2025 Existing
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	61	151	102	126	239	44	133	282	11	66	225	41
Future Volume (vph)	61	151	102	126	239	44	133	282	11	66	225	41
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.977				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1820	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.180			0.364			0.509			0.530		
Satd. Flow (perm)	335	1863	1583	678	1820	0	948	1863	1583	987	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		8				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.70	0.63	1.00	0.60	0.54	0.54	0.95	0.93	0.69	0.75	0.91	0.93
Adj. Flow (vph)	87	240	102	210	443	81	140	303	16	88	247	44
Shared Lane Traffic (%)												
Lane Group Flow (vph)	87	240	102	210	524	0	140	303	16	88	247	44
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2025 Existing
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	22.5		10.0	22.5		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	30.9	21.1	101.5	36.4	26.2		50.4	40.3	40.3	46.4	36.2	36.2
Actuated g/C Ratio	0.30	0.21	1.00	0.36	0.26		0.50	0.40	0.40	0.46	0.36	0.36
v/c Ratio	0.38	0.62	0.06	0.58	1.10		0.26	0.41	0.02	0.17	0.37	0.07
Control Delay	25.8	44.4	0.1	29.3	109.7		15.0	26.8	0.1	14.6	27.8	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.8	44.4	0.1	29.3	109.7		15.0	26.8	0.1	14.6	27.8	0.2
LOS	C	D	A	C	F		B	C	A	B	C	A
Approach Delay		30.1			86.7			22.3			21.5	
Approach LOS		C			F			C			C	
Queue Length 50th (ft)	36	143	0	94	~405		48	151	0	29	123	0
Queue Length 95th (ft)	54	150	0	97	267		86	247	0	48	204	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	283	479	1583	373	475		579	740	707	582	664	648
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.31	0.50	0.06	0.56	1.10		0.24	0.41	0.02	0.15	0.37	0.07

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 101.5

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 1.10

Intersection Signal Delay: 47.4

Intersection LOS: D

Intersection Capacity Utilization 71.0%

ICU Level of Service C

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

 Ø1	 Ø2	 Ø3	 Ø4
17 s	43 s	17 s	32 s
 Ø5	 Ø6	 Ø7	 Ø8
17 s	43 s	17 s	32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2025 Existing
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	49	79	112	56	111	21	161	325	34	26	350	33
Future Volume (vph)	49	79	112	56	111	21	161	325	34	26	350	33
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.972				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1811	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.602			0.695			0.405			0.511		
Satd. Flow (perm)	1121	1863	1583	1295	1811	0	754	1863	1583	952	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		10				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.80	0.92	0.85	0.85	0.92	0.75	0.85	0.75	0.92	0.92	0.95	0.75
Adj. Flow (vph)	61	86	132	66	121	28	189	433	37	28	368	44
Shared Lane Traffic (%)												
Lane Group Flow (vph)	61	86	132	66	149	0	189	433	37	28	368	44
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2025 Existing
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	22.5		10.0	22.5		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	19.5	12.1	87.7	19.6	12.1		54.1	47.8	47.8	44.8	36.6	36.6
Actuated g/C Ratio	0.22	0.14	1.00	0.22	0.14		0.62	0.55	0.55	0.51	0.42	0.42
v/c Ratio	0.20	0.34	0.08	0.20	0.58		0.32	0.43	0.04	0.05	0.47	0.06
Control Delay	24.9	39.5	0.1	24.9	43.6		10.5	17.1	0.1	9.6	23.6	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	24.9	39.5	0.1	24.9	43.6		10.5	17.1	0.1	9.6	23.6	0.2
LOS	C	D	A	C	D		B	B	A	A	C	A
Approach Delay		17.7			37.9			14.2			20.3	
Approach LOS		B			D			B			C	
Queue Length 50th (ft)	26	46	0	28	76		44	126	0	6	156	0
Queue Length 95th (ft)	48	92	0	55	141		87	234	0	20	272	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	386	561	1583	408	552		606	1016	922	665	777	736
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.16	0.15	0.08	0.16	0.27		0.31	0.43	0.04	0.04	0.47	0.06

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 87.7

Natural Cycle: 80

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.58

Intersection Signal Delay: 19.7

Intersection LOS: B

Intersection Capacity Utilization 64.4%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd



Lanes, Volumes, Timings

JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	41	167	151	148	185	42	148	260	50	39	312	40
Future Volume (vph)	41	167	151	148	185	42	148	260	50	39	312	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.972				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1811	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.225			0.300			0.383			0.585		
Satd. Flow (perm)	419	1863	1583	559	1811	0	713	1863	1583	1090	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		10				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.70	0.63	1.00	0.60	0.54	0.54	0.95	0.93	0.69	0.75	0.91	0.93
Adj. Flow (vph)	59	265	151	247	343	78	156	280	72	52	343	43
Shared Lane Traffic (%)												
Lane Group Flow (vph)	59	265	151	247	421	0	156	280	72	52	343	43
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	22.5		10.0	22.5		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	29.1	20.5	101.6	37.2	26.9		52.2	41.7	41.7	45.2	36.2	36.2
Actuated g/C Ratio	0.29	0.20	1.00	0.37	0.26		0.51	0.41	0.41	0.44	0.36	0.36
v/c Ratio	0.27	0.71	0.10	0.72	0.87		0.33	0.37	0.10	0.10	0.52	0.07
Control Delay	23.9	48.9	0.1	36.8	55.5		15.5	24.8	0.6	13.9	30.6	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	23.9	48.9	0.1	36.8	55.5		15.5	24.8	0.6	13.9	30.6	0.2
LOS	C	D	A	D	E		B	C	A	B	C	A
Approach Delay		30.3			48.6			18.5			25.6	
Approach LOS		C			D			B			C	
Queue Length 50th (ft)	24	162	0	115	265		52	132	0	16	179	0
Queue Length 95th (ft)	40	165	0	113	205		96	222	0	32	289	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	298	479	1583	348	486		496	764	726	620	663	647
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.20	0.55	0.10	0.71	0.87		0.31	0.37	0.10	0.08	0.52	0.07

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 101.6

Natural Cycle: 80

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.87

Intersection Signal Delay: 32.3


Intersection LOS: C

Intersection Capacity Utilization 69.4%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd

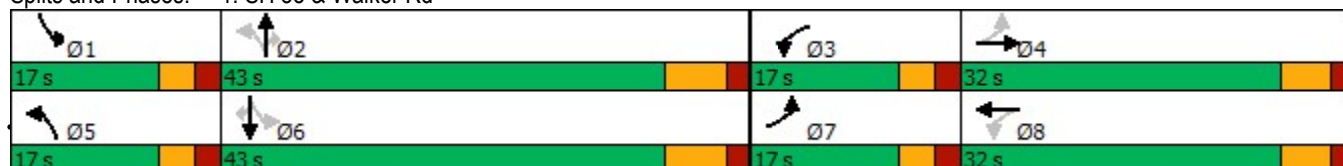

Lanes, Volumes, Timings

JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	41	167	151	148	185	42	148	260	50	39	312	40
Future Volume (vph)	41	167	151	148	185	42	148	260	50	39	312	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.981				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1827	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.255			0.395			0.432			0.596		
Satd. Flow (perm)	475	1863	1583	736	1827	0	805	1863	1583	1110	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		6				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	1.00	0.83	1.00	0.67	0.50	0.79	1.00	0.98	0.58	0.52	1.00	0.93
Adj. Flow (vph)	41	201	151	221	370	53	148	265	86	75	312	43
Shared Lane Traffic (%)												
Lane Group Flow (vph)	41	201	151	221	423	0	148	265	86	75	312	43
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	22.5		10.0	22.5		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	25.5	17.4	98.1	34.4	26.7		51.1	40.9	40.9	45.8	36.2	36.2
Actuated g/C Ratio	0.26	0.18	1.00	0.35	0.27		0.52	0.42	0.42	0.47	0.37	0.37
v/c Ratio	0.19	0.61	0.10	0.58	0.85		0.29	0.34	0.12	0.13	0.45	0.06
Control Delay	23.1	45.5	0.1	30.0	52.0		14.0	23.7	1.6	13.1	27.7	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	23.1	45.5	0.1	30.0	52.0		14.0	23.7	1.6	13.1	27.7	0.2
LOS	C	D	A	C	D		B	C	A	B	C	A
Approach Delay		25.7			44.4			17.0			22.4	
Approach LOS		C			D			B			C	
Queue Length 50th (ft)	17	118	0	100	265		48	124	0	23	157	0
Queue Length 95th (ft)	40	176	0	116	188		86	204	0	27	250	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	307	497	1583	385	508		546	776	735	650	688	666
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.13	0.40	0.10	0.57	0.83		0.27	0.34	0.12	0.12	0.45	0.06

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 98.1

Natural Cycle: 80

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.85

Intersection Signal Delay: 28.9


Intersection LOS: C

Intersection Capacity Utilization 69.4%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd

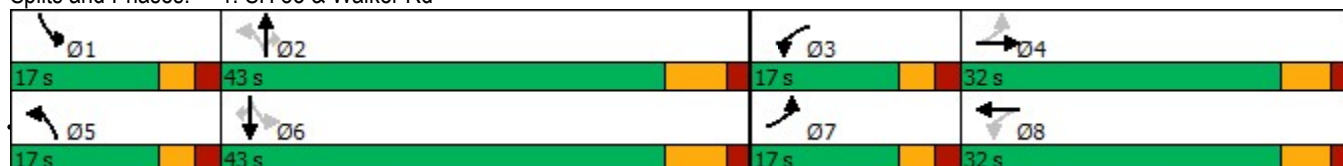

Lanes, Volumes, Timings

JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	50	83	117	36	99	15	150	325	39	28	353	37
Future Volume (vph)	50	83	117	36	99	15	150	325	39	28	353	37
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.977				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1820	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.576			0.699			0.399			0.495		
Satd. Flow (perm)	1073	1863	1583	1302	1820	0	743	1863	1583	922	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		8				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.80	0.92	0.85	0.85	0.92	0.75	0.85	0.75	0.92	0.92	0.95	0.75
Adj. Flow (vph)	63	90	138	42	108	20	176	433	42	30	372	49
Shared Lane Traffic (%)												
Lane Group Flow (vph)	63	90	138	42	128	0	176	433	42	30	372	49
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1	1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100	20	20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	22.5		10.0	22.5		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	20.4	14.3	86.2	17.8	11.1		53.3	45.1	45.1	44.9	36.6	36.6
Actuated g/C Ratio	0.24	0.17	1.00	0.21	0.13		0.62	0.52	0.52	0.52	0.42	0.42
v/c Ratio	0.20	0.29	0.09	0.14	0.53		0.31	0.45	0.05	0.06	0.47	0.07
Control Delay	24.9	36.3	0.1	24.2	42.7		10.0	18.2	0.1	9.2	22.7	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	24.9	36.3	0.1	24.2	42.7		10.0	18.2	0.1	9.2	22.7	0.2
LOS	C	D	A	C	D		A	B	A	A	C	A
Approach Delay		16.7			38.1			14.8			19.3	
Approach LOS		B			D			B			B	
Queue Length 50th (ft)	26	46	0	17	63		40	165	0	6	148	0
Queue Length 95th (ft)	50	94	0	39	124		78	228	0	20	270	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	385	571	1583	403	563		606	973	889	663	790	746
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.16	0.16	0.09	0.10	0.23		0.29	0.45	0.05	0.05	0.47	0.07

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 86.2

Natural Cycle: 80

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.53

Intersection Signal Delay: 19.0


Intersection LOS: B

Intersection Capacity Utilization 57.7%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd

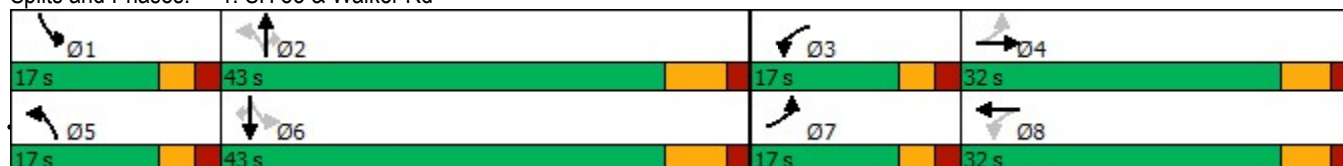

Lanes, Volumes, Timings

JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline + Site
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	31	169	102	163	273	49	133	282	14	70	225	41
Future Volume (vph)	31	169	102	163	273	49	133	282	14	70	225	41
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.977				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1787	1881	1599	1787	1838	0	1787	1881	1599	1787	1881	1599
Flt Permitted	0.189			0.303			0.512			0.531		
Satd. Flow (perm)	356	1881	1599	570	1838	0	963	1881	1599	999	1881	1599
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		8				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.70	0.65	1.00	0.71	0.59	0.59	0.95	0.93	0.75	0.76	0.91	0.93
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%
Adj. Flow (vph)	44	260	102	230	463	83	140	303	19	92	247	44
Shared Lane Traffic (%)												
Lane Group Flow (vph)	44	260	102	230	546	0	140	303	19	92	247	44
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline + Site
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		Free	8			2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	1.0		1.0	1.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	7.0		6.0	7.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	27.2	18.1	99.6	34.6	27.3		50.1	40.1	40.1	46.4	36.2	36.2
Actuated g/C Ratio	0.27	0.18	1.00	0.35	0.27		0.50	0.40	0.40	0.47	0.36	0.36
v/c Ratio	0.22	0.76	0.06	0.70	1.07		0.25	0.40	0.03	0.17	0.36	0.07
Control Delay	23.3	53.9	0.1	36.9	97.1		14.3	25.9	0.1	13.9	26.7	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	23.3	53.9	0.1	36.9	97.1		14.3	25.9	0.1	13.9	26.7	0.2
LOS	C	D	A	D	F		B	C	A	B	C	A
Approach Delay		37.0			79.3			21.3			20.6	
Approach LOS		D			E			C			C	
Queue Length 50th (ft)	18	159	0	106	~430		45	146	0	29	118	0
Queue Length 95th (ft)	32	169	0	130	307		87	248	0	50	204	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	288	474	1599	333	509		597	757	721	600	684	664
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.15	0.55	0.06	0.69	1.07		0.23	0.40	0.03	0.15	0.36	0.07

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 99.6

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.07

Intersection Signal Delay: 46.5

Intersection LOS: D

Intersection Capacity Utilization 73.9%

ICU Level of Service D

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline + Site
AM

Splits and Phases: 1: SH 83 & Walker Rd

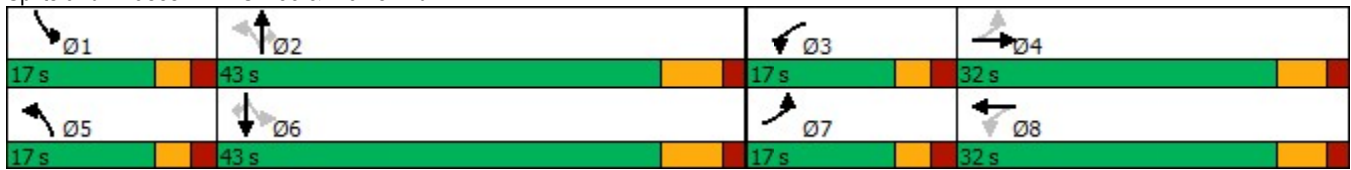

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline + Site
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	41	181	151	165	197	45	148	260	55	42	312	40
Future Volume (vph)	41	181	151	165	197	45	148	260	55	42	312	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.980				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1825	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.279			0.372			0.431			0.596		
Satd. Flow (perm)	520	1863	1583	693	1825	0	803	1863	1583	1110	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		7				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	1.00	0.84	1.00	0.73	0.55	0.80	1.00	0.98	0.63	0.55	1.00	0.91
Adj. Flow (vph)	41	215	151	226	358	56	148	265	87	76	312	44
Shared Lane Traffic (%)												
Lane Group Flow (vph)	41	215	151	226	414	0	148	265	87	76	312	44
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

ST Baseline + Site
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	25.8	17.7	98.4	34.8	27.0		51.0	40.8	40.8	45.8	36.2	36.2
Actuated g/C Ratio	0.26	0.18	1.00	0.35	0.27		0.52	0.41	0.41	0.47	0.37	0.37
v/c Ratio	0.18	0.64	0.10	0.61	0.82		0.29	0.34	0.12	0.13	0.46	0.07
Control Delay	22.8	46.7	0.1	31.0	49.4		14.1	23.9	1.7	13.2	27.9	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	22.8	46.7	0.1	31.0	49.4		14.1	23.9	1.7	13.2	27.9	0.2
LOS	C	D	A	C	D		B	C	A	B	C	A
Approach Delay		27.0			42.9			17.1			22.5	
Approach LOS		C			D			B			C	
Queue Length 50th (ft)	17	127	0	103	257		48	124	0	24	157	0
Queue Length 95th (ft)	40	190	0	131	206		87	206	0	29	252	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	316	495	1583	377	510		543	772	732	648	685	664
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.13	0.43	0.10	0.60	0.81		0.27	0.34	0.12	0.12	0.46	0.07

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 98.4

Natural Cycle: 80

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.82

Intersection Signal Delay: 28.7

Intersection LOS: C

Intersection Capacity Utilization 71.0%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd



Lanes, Volumes, Timings

JAB

Lanes, Volumes, Timings
3: Jane Lundeen Dr & North Access

ST Baseline + Site
PM

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	0	0	0	71	36	0
Future Volume (vph)	0	0	0	71	36	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt						
Flt Protected						
Satd. Flow (prot)	0	1863	0	1863	1863	0
Flt Permitted						
Satd. Flow (perm)	0	1863	0	1863	1863	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	198			385	453	
Travel Time (s)	4.5			8.8	10.3	
Peak Hour Factor	0.78	0.78	0.87	0.60	0.47	0.83
Adj. Flow (vph)	0	0	0	118	77	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	118	77	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			12	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	60	60	60			60
Sign Control	Stop			Free	Free	
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilization 7.1%				ICU Level of Service A		
Analysis Period (min) 15						

Lanes, Volumes, Timings
4: Jane Lundeen Dr & Middle Access

ST Baseline + Site
PM

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	34	0	8	117	65	13
Future Volume (vph)	34	0	8	117	65	13
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0	0	0			0
Storage Lanes	1	0	0			0
Taper Length (ft)	25		25			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.986	
Flt Protected	0.950			0.998		
Satd. Flow (prot)	1770	0	0	1859	1837	0
Flt Permitted	0.950			0.998		
Satd. Flow (perm)	1770	0	0	1859	1837	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	265			406	385	
Travel Time (s)	6.0			9.2	8.8	
Peak Hour Factor	0.78	0.78	0.83	0.60	0.47	0.83
Adj. Flow (vph)	44	0	10	195	138	16
Shared Lane Traffic (%)						
Lane Group Flow (vph)	44	0	0	205	154	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			12	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	60	60	60			60
Sign Control	Stop			Free	Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	22.7%			ICU Level of Service A		
Analysis Period (min)	15					

Lanes, Volumes, Timings
5: Jane Lundeen Dr & South Access

ST Baseline + Site
PM

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	31	0	4	95	49	16
Future Volume (vph)	31	0	4	95	49	16
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0	0	155			0
Storage Lanes	1	0	1			0
Taper Length (ft)	25		160			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.979	
Flt Protected	0.950		0.950			
Satd. Flow (prot)	1770	0	1770	1863	1824	0
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	1770	0	1770	1863	1824	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	211			329	406	
Travel Time (s)	4.8			7.5	9.2	
Peak Hour Factor	0.78	0.78	0.83	0.60	0.47	0.83
Adj. Flow (vph)	40	0	5	158	104	19
Shared Lane Traffic (%)						
Lane Group Flow (vph)	40	0	5	158	123	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			12	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	60	60	60			60
Sign Control	Stop			Free	Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	15.0%			ICU Level of Service A		
Analysis Period (min)	15					

Lanes, Volumes, Timings
7: SE Access & Pinehurst

ST Baseline + Site
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (vph)	0	2	0	0	4	0	0	0	0	0	0	0
Future Volume (vph)	0	2	0	0	4	0	0	0	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt												
Flt Protected												
Satd. Flow (prot)	0	1863	0	0	1863	0	0	1863	0	0	1863	0
Flt Permitted												
Satd. Flow (perm)	0	1863	0	0	1863	0	0	1863	0	0	1863	0
Link Speed (mph)		25			25			25			30	
Link Distance (ft)		137			392			288			277	
Travel Time (s)		3.7			10.7			7.9			6.3	
Peak Hour Factor	0.92	0.78	0.78	0.78	0.78	0.92	0.78	0.92	0.78	0.92	0.92	0.92
Adj. Flow (vph)	0	3	0	0	5	0	0	0	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	3	0	0	5	0	0	0	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization 6.7%	ICU Level of Service A											
Analysis Period (min) 15												

Lanes, Volumes, Timings
9: Pinehurst & Left-In

ST Baseline + Site
PM

						
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (vph)	0	0	0	0	0	0
Future Volume (vph)	0	0	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Fr t						
Flt Protected						
Satd. Flow (prot)	0	1863	0	0	0	0
Flt Permitted						
Satd. Flow (perm)	0	1863	0	0	0	0
Link Speed (mph)		30	30		30	
Link Distance (ft)		430	274		178	
Travel Time (s)		9.8	6.2		4.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	0	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		0	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	60			60	60	60
Sign Control		Stop	Stop		Stop	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization 0.0%	ICU Level of Service A					
Analysis Period (min) 15						

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	54	259	200	210	337	71	175	386	80	107	320	72
Future Volume (vph)	54	259	200	210	337	71	175	386	80	107	320	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		255	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt			0.850		0.974				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1787	1881	1599	1787	1832	0	1787	3574	1599	1787	3574	1599
Flt Permitted	0.165			0.199			0.509			0.491		
Satd. Flow (perm)	310	1881	1599	374	1832	0	958	3574	1599	924	3574	1599
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		9				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.79	0.74	1.00	0.71	0.63	0.63	0.95	0.93	0.89	0.81	0.91	0.93
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%
Adj. Flow (vph)	68	350	200	296	535	113	184	415	90	132	352	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	68	350	200	296	648	0	184	415	90	132	352	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		Free	8			2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	1.0		1.0	1.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	7.0		6.0	7.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	32.1	22.2	105.0	38.2	28.6		49.9	37.3	37.3	47.6	36.1	36.1
Actuated g/C Ratio	0.31	0.21	1.00	0.36	0.27		0.48	0.36	0.36	0.45	0.34	0.34
v/c Ratio	0.33	0.88	0.13	1.04	1.29		0.34	0.33	0.14	0.27	0.29	0.12
Control Delay	25.1	64.4	0.2	93.7	176.2		16.5	26.5	2.1	15.8	26.7	1.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.1	64.4	0.2	93.7	176.2		16.5	26.5	2.1	15.8	26.7	1.2
LOS	C	E	A	F	F		B	C	A	B	C	A
Approach Delay		39.3			150.3			20.6			20.6	
Approach LOS		D			F			C			C	
Queue Length 50th (ft)	29	232	0	~158	~584		68	111	0	47	95	0
Queue Length 95th (ft)	50	267	0	#203	#485		111	157	14	73	134	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	276	448	1599	284	504		562	1268	651	539	1228	635
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.78	0.13	1.04	1.29		0.33	0.33	0.14	0.24	0.29	0.12

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 105

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.29

Intersection Signal Delay: 68.3

Intersection LOS: E

Intersection Capacity Utilization 80.9%

ICU Level of Service D

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

 Ø1 17 s	 Ø2 43 s	 Ø3 17 s	 Ø4 32 s
 Ø5 17 s	 Ø6 43 s	 Ø7 17 s	 Ø8 32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	72	325	227	260	291	73	225	356	150	68	443	70
Future Volume (vph)	72	325	227	260	291	73	225	356	150	68	443	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		255	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt			0.850		0.976				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1818	0	1770	3539	1583	1770	3539	1583
Flt Permitted	0.159			0.164			0.401			0.535		
Satd. Flow (perm)	296	1863	1583	305	1818	0	747	3539	1583	997	3539	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			227		8				190			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.97	0.87	1.00	0.77	0.65	0.84	1.00	0.98	0.79	0.68	1.00	0.91
Adj. Flow (vph)	74	374	227	338	448	87	225	363	190	100	443	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	74	374	227	338	535	0	225	363	190	100	443	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	33.4	24.1	106.7	40.6	30.2		52.7	41.3	41.3	46.7	36.1	36.1
Actuated g/C Ratio	0.31	0.23	1.00	0.38	0.28		0.49	0.39	0.39	0.44	0.34	0.34
v/c Ratio	0.36	0.89	0.14	1.21	1.03		0.47	0.27	0.26	0.20	0.37	0.12
Control Delay	25.8	64.2	0.2	147.3	86.7		18.7	24.6	4.7	15.4	28.3	1.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.8	64.2	0.2	147.3	86.7		18.7	24.6	4.7	15.4	28.3	1.2
LOS	C	E	A	F	F		B	C	A	B	C	A
Approach Delay		38.5			110.2			18.0			22.9	
Approach LOS		D			F			B			C	
Queue Length 50th (ft)	32	250	0	~225	~411		86	94	0	35	124	0
Queue Length 95th (ft)	62	#383	0	#319	#377		135	137	30	48	168	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	269	454	1583	280	519		484	1369	729	555	1195	620
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.28	0.82	0.14	1.21	1.03		0.46	0.27	0.26	0.18	0.37	0.12

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 106.7

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.21

Intersection Signal Delay: 51.0

Intersection LOS: D

Intersection Capacity Utilization 88.1%

ICU Level of Service E

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.


95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
School PM

Splits and Phases: 1: SH 83 & Walker Rd

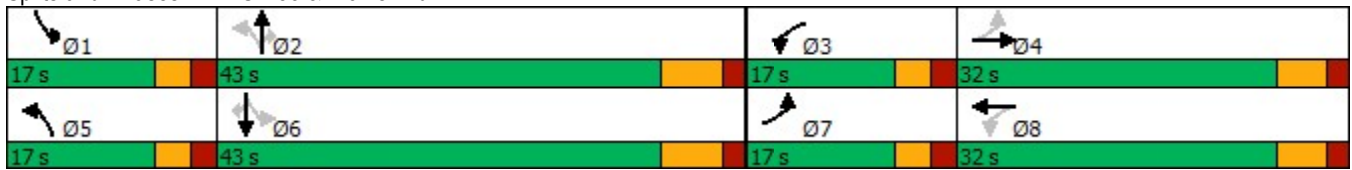

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	86	206	170	170	263	52	250	445	182	59	497	58
Future Volume (vph)	86	206	170	170	263	52	250	445	182	59	497	58
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		255	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt			0.850		0.974				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1814	0	1770	3539	1583	1770	3539	1583
Flt Permitted	0.298			0.393			0.348			0.426		
Satd. Flow (perm)	555	1863	1583	732	1814	0	648	3539	1583	794	3539	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		9				198			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.85	0.92	0.85	0.90	0.92	0.85	0.85	0.75	0.92	0.92	0.95	0.82
Adj. Flow (vph)	101	224	200	189	286	61	294	593	198	64	523	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	101	224	200	189	347	0	294	593	198	64	523	71
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	30.8	20.4	102.8	35.0	24.8		54.4	43.1	43.1	45.6	36.2	36.2
Actuated g/C Ratio	0.30	0.20	1.00	0.34	0.24		0.53	0.42	0.42	0.44	0.35	0.35
v/c Ratio	0.36	0.61	0.13	0.52	0.78		0.62	0.40	0.25	0.15	0.42	0.11
Control Delay	25.3	44.8	0.2	28.3	50.3		21.6	24.1	4.4	14.5	27.7	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.3	44.8	0.2	28.3	50.3		21.6	24.1	4.4	14.5	27.7	0.6
LOS	C	D	A	C	D		C	C	A	B	C	A
Approach Delay		24.0			42.6			19.8			23.5	
Approach LOS		C			D			B			C	
Queue Length 50th (ft)	44	136	0	87	217		111	155	0	21	144	0
Queue Length 95th (ft)	76	214	0	140	#362		166	175	48	45	200	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	323	473	1583	371	467		474	1484	779	502	1245	641
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.31	0.47	0.13	0.51	0.74		0.62	0.40	0.25	0.13	0.42	0.11

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 102.8

Natural Cycle: 80

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.78

Intersection Signal Delay: 25.8

Intersection LOS: C

Intersection Capacity Utilization 79.8%

ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

 Ø1	 Ø2	 Ø3	 Ø4
17 s	43 s	17 s	32 s
 Ø5	 Ø6	 Ø7	 Ø8
17 s	43 s	17 s	32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	54	267	200	246	359	75	175	386	82	108	320	72
Future Volume (vph)	54	267	200	246	359	75	175	386	82	108	320	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.974				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1787	1881	1599	1787	1832	0	1787	1881	1599	1787	1881	1599
Flt Permitted	0.163			0.192			0.384			0.340		
Satd. Flow (perm)	307	1881	1599	361	1832	0	722	1881	1599	640	1881	1599
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		9				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.79	0.75	1.00	0.77	0.66	0.66	0.95	0.93	0.89	0.81	0.91	0.93
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%
Adj. Flow (vph)	68	356	200	319	544	114	184	415	92	133	352	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	68	356	200	319	658	0	184	415	92	133	352	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	L NA	Left	Right	L NA	Left	Right	L NA	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		Free	8			2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	1.0		1.0	1.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	7.0		6.0	7.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effct Green (s)	32.4	22.4	105.2	38.4	28.8		49.9	37.2	37.2	47.6	36.1	36.1
Actuated g/C Ratio	0.31	0.21	1.00	0.37	0.27		0.47	0.35	0.35	0.45	0.34	0.34
v/c Ratio	0.33	0.89	0.13	1.14	1.30		0.41	0.62	0.14	0.34	0.55	0.12
Control Delay	25.1	65.6	0.2	123.7	181.4		17.6	34.2	2.3	16.9	32.7	1.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.1	65.6	0.2	123.7	181.4		17.6	34.2	2.3	16.9	32.7	1.2
LOS	C	E	A	F	F		B	C	A	B	C	A
Approach Delay		40.2			162.6			25.5			24.6	
Approach LOS		D			F			C			C	
Queue Length 50th (ft)	29	238	0	~186	~598		68	240	0	48	201	0
Queue Length 95th (ft)	50	276	0	#285	#537		111	359	16	73	297	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	275	447	1599	280	507		472	665	649	435	645	633
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.80	0.13	1.14	1.30		0.39	0.62	0.14	0.31	0.55	0.12

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 105.2

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.30

Intersection Signal Delay: 75.5

Intersection LOS: E

Intersection Capacity Utilization 83.2%

ICU Level of Service E

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

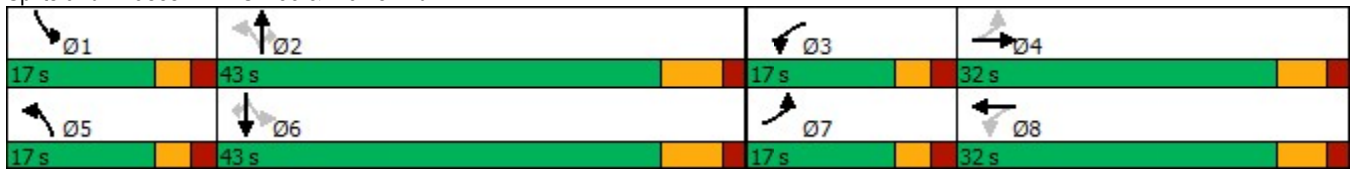

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	72	339	227	277	303	76	225	356	155	71	443	70
Future Volume (vph)	72	339	227	277	303	76	225	356	155	71	443	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.975				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1816	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.155			0.155			0.255			0.424		
Satd. Flow (perm)	289	1863	1583	289	1816	0	475	1863	1583	790	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			227		9				194			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.97	0.87	1.00	0.79	0.67	0.84	1.00	0.98	0.80	0.69	1.00	0.91
Adj. Flow (vph)	74	390	227	351	452	90	225	363	194	103	443	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	74	390	227	351	542	0	225	363	194	103	443	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	L NA	Left	Right	L NA	Left	Right	L NA	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	34.1	24.8	107.2	41.3	30.8		52.0	38.6	38.6	46.8	36.0	36.0
Actuated g/C Ratio	0.32	0.23	1.00	0.39	0.29		0.49	0.36	0.36	0.44	0.34	0.34
v/c Ratio	0.36	0.91	0.14	1.27	1.03		0.61	0.54	0.28	0.24	0.71	0.12
Control Delay	25.8	66.3	0.2	172.2	85.3		23.1	31.7	4.8	16.0	38.9	1.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.8	66.3	0.2	172.2	85.3		23.1	31.7	4.8	16.0	38.9	1.2
LOS	C	E	A	F	F		C	C	A	B	D	A
Approach Delay		40.2			119.5			22.6			30.4	
Approach LOS		D			F			C			C	
Queue Length 50th (ft)	32	264	0	~251	~421		86	200	0	36	271	0
Queue Length 95th (ft)	62	#408	0	#360	#408		135	307	32	50	390	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	267	452	1583	277	528		377	670	694	478	626	618
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.28	0.86	0.14	1.27	1.03		0.60	0.54	0.28	0.22	0.71	0.12

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 107.2

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.27

Intersection Signal Delay: 57.2

Intersection LOS: E

Intersection Capacity Utilization 89.8%

ICU Level of Service E

Analysis Period (min) 15


~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

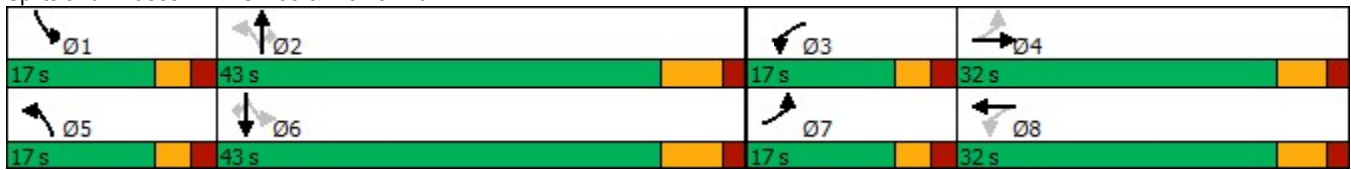

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	86	225	170	189	275	55	250	445	189	62	497	58
Future Volume (vph)	86	225	170	189	275	55	250	445	189	62	497	58
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75			25			220			300		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.973				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	1863	1583	1770	1812	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.278			0.350			0.181			0.229		
Satd. Flow (perm)	518	1863	1583	652	1812	0	337	1863	1583	427	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		9				205			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.85	0.92	0.85	0.90	0.92	0.85	0.50	0.75	0.92	0.92	0.95	0.82
Adj. Flow (vph)	101	245	200	210	299	65	500	593	205	67	523	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	101	245	200	210	364	0	500	593	205	67	523	71
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	L NA	Left	Right	L NA	Left	Right	L NA	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40	40	40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	31.2	20.8	103.6	35.9	25.5		54.4	43.1	43.1	45.6	36.1	36.1
Actuated g/C Ratio	0.30	0.20	1.00	0.35	0.25		0.53	0.42	0.42	0.44	0.35	0.35
v/c Ratio	0.38	0.66	0.13	0.60	0.81		1.46	0.77	0.26	0.24	0.81	0.11
Control Delay	25.6	46.7	0.2	31.0	51.8		242.0	36.8	4.3	15.9	42.8	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	25.6	46.7	0.2	31.0	51.8		242.0	36.8	4.3	15.9	42.8	0.6
LOS	C	D	A	C	D		F	D	A	B	D	A
Approach Delay		25.7			44.2			110.7			35.6	
Approach LOS		C			D			F			D	
Queue Length 50th (ft)	44	151	0	98	230		~381	364	0	22	327	0
Queue Length 95th (ft)	76	234	0	155	#391		#193	414	48	47	#521	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	315	469	1583	355	464		343	775	778	363	649	636
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.32	0.52	0.13	0.59	0.78		1.46	0.77	0.26	0.18	0.81	0.11

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 103.6

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.46

Intersection Signal Delay: 67.1

Intersection LOS: E

Intersection Capacity Utilization 81.8%

ICU Level of Service D

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

 Ø1 17 s	 Ø2 43 s	 Ø3 17 s	 Ø4 32 s
 Ø5 17 s	 Ø6 43 s	 Ø7 17 s	 Ø8 32 s

Synchro Reports

LOS (signal) -- existing laneage + existing timings

Synchro Reports

State Highway 83 + Highway 105/Walker Road

2045 Background

Recommended Laneage

Existing Signal Timings

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	54	259	200	210	337	71	175	386	80	107	320	72
Future Volume (vph)	54	259	200	210	337	71	175	386	80	107	320	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		255	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75		175	25		160	220		300	300		300
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.974				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1787	3574	1599	1787	3481	0	1787	1881	1599	1787	1881	1599
Flt Permitted	0.284			0.369			0.402			0.362		
Satd. Flow (perm)	534	3574	1599	694	3481	0	756	1881	1599	681	1881	1599
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		21				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.79	0.74	1.00	0.71	0.63	0.63	0.95	0.93	0.89	0.81	0.91	0.93
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%
Adj. Flow (vph)	68	350	200	296	535	113	184	415	90	132	352	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	68	350	200	296	648	0	184	415	90	132	352	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40		40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	

2045 Background AM
Lanes, Volumes, Timings

Synchro 11 Report
JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		Free	8			2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	1.0		1.0	1.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	7.0		6.0	7.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	27.8	17.6	100.3	33.4	23.9		49.7	37.3	37.3	47.4	36.2	36.2
Actuated g/C Ratio	0.28	0.18	1.00	0.33	0.24		0.50	0.37	0.37	0.47	0.36	0.36
v/c Ratio	0.27	0.56	0.13	0.84	0.77		0.38	0.59	0.13	0.31	0.52	0.12
Control Delay (s/veh)	24.0	41.2	0.2	49.4	42.5		15.7	31.1	2.1	15.1	30.0	1.1
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	24.0	41.2	0.2	49.4	42.5		15.7	31.1	2.1	15.1	30.0	1.1
LOS	C	D	A	D	D		B	C	A	B	C	A
Approach Delay (s/veh)		26.0			44.7			23.2			22.5	
Approach LOS		C			D			C			C	
Queue Length 50th (ft)	29	110	0	147	207		60	217	0	42	182	0
Queue Length 95th (ft)	51	126	0	168	182		110	357	14	72	295	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	319	895	1599	351	900		510	700	676	474	678	660
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.21	0.39	0.13	0.84	0.72		0.36	0.59	0.13	0.28	0.52	0.12

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 100.3

Natural Cycle: 75

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.84

Intersection Signal Delay (s/veh): 30.9

Intersection LOS: C

Intersection Capacity Utilization 74.3%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: SH 83 & Walker Rd

#1  Ø1	#1  Ø2	#1  Ø3	#1  Ø4
17 s	43 s	17 s	32 s
#1  Ø5	#1  Ø6	#1  Ø7	#1  Ø8
17 s	43 s	17 s	32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	72	325	227	260	291	73	225	356	150	68	443	70
Future Volume (vph)	72	325	227	260	291	73	225	356	150	68	443	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		255	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75		175	25		160	220		300	300		300
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.976				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	3539	1583	1770	3454	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.362			0.320			0.285			0.485		
Satd. Flow (perm)	674	3539	1583	596	3454	0	531	1863	1583	903	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			227		19				190			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.97	0.87	1.00	0.77	0.65	0.84	1.00	0.98	0.79	0.68	1.00	0.91
Adj. Flow (vph)	74	374	227	338	448	87	225	363	190	100	443	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	74	374	227	338	535	0	225	363	190	100	443	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40		40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

2045 Background School PM
Lanes, Volumes, Timings

Synchro 11 Report
JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effct Green (s)	26.5	17.1	99.5	33.6	23.1		52.5	41.4	41.4	46.4	36.1	36.1
Actuated g/C Ratio	0.27	0.17	1.00	0.34	0.23		0.53	0.42	0.42	0.47	0.36	0.36
v/c Ratio	0.27	0.62	0.14	0.99	0.65		0.54	0.47	0.25	0.20	0.66	0.12
Control Delay (s/veh)	24.4	42.6	0.2	75.4	38.7		17.9	26.1	4.5	13.4	33.2	1.1
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	24.4	42.6	0.2	75.4	38.7		17.9	26.1	4.5	13.4	33.2	1.1
LOS	C	D	A	E	D		B	C	A	B	C	A
Approach Delay (s/veh)		26.3			52.9			18.4			26.0	
Approach LOS		C			D			B			C	
Queue Length 50th (ft)	32	119	0	174	165		69	170	0	29	235	0
Queue Length 95th (ft)	63	160	0	#214	154		136	308	31	48	393	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	336	928	1583	343	937		432	774	769	560	676	657
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.22	0.40	0.14	0.99	0.57		0.52	0.47	0.25	0.18	0.66	0.12
Intersection Summary												
Area Type: Other												
Cycle Length: 109												
Actuated Cycle Length: 99.5												
Natural Cycle: 80												
Control Type: Semi Act-Uncoord												
Maximum v/c Ratio: 0.99												
Intersection Signal Delay (s/veh): 32.1 Intersection LOS: C												
Intersection Capacity Utilization 80.0% ICU Level of Service D												
Analysis Period (min) 15												
# 95th percentile volume exceeds capacity, queue may be longer.												
Queue shown is maximum after two cycles.												

Splits and Phases: 1: SH 83 & Walker Rd

#1 Ø1	#1 Ø2	#1 Ø3	#1 Ø4
17 s	43 s	17 s	32 s
#1 Ø5	#1 Ø6	#1 Ø7	#1 Ø8
17 s	43 s	17 s	32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	86	206	170	170	263	52	250	445	182	59	497	58
Future Volume (vph)	86	206	170	170	263	52	250	445	182	59	497	58
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		255	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75		175	25		160	220		300	300		300
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.974				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	3539	1583	1770	3447	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.544			0.492			0.220			0.285		
Satd. Flow (perm)	1013	3539	1583	916	3447	0	410	1863	1583	531	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		22				198			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.85	0.92	0.85	0.90	0.92	0.85	0.85	0.75	0.92	0.92	0.95	0.82
Adj. Flow (vph)	101	224	200	189	286	61	294	593	198	64	523	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	101	224	200	189	347	0	294	593	198	64	523	71
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40		40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

2045 Background PM
Lanes, Volumes, Timings

Synchro 11 Report
JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
PM

																		
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR						
Detector Phase	7	4		3	8		5	2	2	1	6	6						
Switch Phase																		
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0						
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0						
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0						
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%						
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0						
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0						
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0						
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0						
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0						
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?																		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0						
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max						
Act Effct Green (s)	22.8	12.5	94.9	27.2	16.9		54.6	43.3	43.3	45.1	36.1	36.1						
Actuated g/C Ratio	0.24	0.13	1.00	0.29	0.18		0.58	0.46	0.46	0.48	0.38	0.38						
v/c Ratio	0.32	0.48	0.13	0.52	0.55		0.72	0.70	0.24	0.19	0.74	0.10						
Control Delay (s/veh)	26.3	41.6	0.2	30.4	38.0		23.2	28.6	3.8	11.7	34.0	0.6						
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0						
Total Delay (s/veh)	26.3	41.6	0.2	30.4	38.0		23.2	28.6	3.8	11.7	34.0	0.6						
LOS	C	D	A	C	D		C	C	A	B	C	A						
Approach Delay (s/veh)		22.9			35.3			22.6			28.2							
Approach LOS		C			D			C			C							
Queue Length 50th (ft)	45	68	0	88	99		83	291	0	16	270	0						
Queue Length 95th (ft)	78	105	0	145	150		#165	375	45	40	#458	0						
Internal Link Dist (ft)		654			612			747			512							
Turn Bay Length (ft)	265		330				455		400	435		435						
Base Capacity (vph)	368	971	1583	372	962		408	850	830	437	708	682						
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0						
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0						
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0						
Reduced v/c Ratio	0.27	0.23	0.13	0.51	0.36		0.72	0.70	0.24	0.15	0.74	0.10						
Intersection Summary																		
Area Type:	Other																	
Cycle Length:	109																	
Actuated Cycle Length:	94.9																	
Natural Cycle:	70																	
Control Type:	Semi Act-Uncoord																	
Maximum v/c Ratio:	0.74																	
Intersection Signal Delay (s/veh):	26.4						Intersection LOS: C											
Intersection Capacity Utilization	74.3%						ICU Level of Service D											
Analysis Period (min)	15																	
# 95th percentile volume exceeds capacity, queue may be longer.																		
Queue shown is maximum after two cycles.																		

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background
PM

Splits and Phases: 1: SH 83 & Walker Rd

#1 Ø1	#1 Ø2	#1 Ø3	#1 Ø4
17 s	43 s	17 s	32 s
#1 Ø5	#1 Ø6	#1 Ø7	#1 Ø8
17 s	43 s	17 s	32 s

Synchro Reports

State Highway 83 + Highway 105/Walker Road

2045 Background + Site

Recommended Laneage

Modified Signal Timings

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	54	267	200	246	359	75	175	386	82	108	320	72
Future Volume (vph)	54	267	200	246	359	75	175	386	82	108	320	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75		175	25		0	220		300	300		300
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.974				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1787	3574	1599	1787	3481	0	1787	1881	1599	1787	1881	1599
Flt Permitted	0.292			0.345			0.401			0.357		
Satd. Flow (perm)	549	3574	1599	649	3481	0	754	1881	1599	672	1881	1599
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		21				130			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.79	0.75	1.00	0.77	0.66	0.66	0.95	0.93	0.89	0.81	0.91	0.93
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%
Adj. Flow (vph)	68	356	200	319	544	114	184	415	92	133	352	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	68	356	200	319	658	0	184	415	92	133	352	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	L NA	Left	Right	L NA	Left	Right	L NA	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40		40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	

2045 Background + Site AM
Lanes, Volumes, Timings

Synchro 11 Report
JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
AM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4		Free	8			2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	31.0		18.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	28.4%		16.5%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	25.0		13.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	1.0		1.0	1.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	7.0		6.0	7.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effect Green (s)	27.3	17.2	100.9	34.9	24.5		49.7	37.3	37.3	47.4	36.1	36.1
Actuated g/C Ratio	0.27	0.17	1.00	0.35	0.24		0.49	0.37	0.37	0.47	0.36	0.36
v/c Ratio	0.27	0.59	0.13	0.89	0.77		0.38	0.60	0.14	0.32	0.52	0.12
Control Delay (s/veh)	24.1	42.5	0.2	54.7	42.3		15.8	31.5	2.2	15.3	30.3	1.1
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	24.1	42.5	0.2	54.7	42.3		15.8	31.5	2.2	15.3	30.3	1.1
LOS	C	D	A	D	D		B	C	A	B	C	A
Approach Delay (s/veh)		27.0			46.4			23.4			22.7	
Approach LOS		C			D			C			C	
Queue Length 50th (ft)	29	114	0	162	212		62	223	0	44	187	0
Queue Length 95th (ft)	51	131	0	#219	195		110	357	16	73	294	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	317	853	1599	360	903		506	695	672	467	673	656
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.21	0.42	0.13	0.89	0.73		0.36	0.60	0.14	0.28	0.52	0.12

Intersection Summary

Area Type: Other

Cycle Length: 109

Actuated Cycle Length: 100.9

Natural Cycle: 80

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.89

Intersection Signal Delay (s/veh): 31.9

Intersection LOS: C

Intersection Capacity Utilization 76.5%

ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: SH 83 & Walker Rd

#1 Ø1	#1 Ø2	#1 Ø3	#1 Ø4
17 s	43 s	18 s	31 s
#1 Ø5	#1 Ø6	#1 Ø7	#1 Ø8
17 s	43 s	17 s	32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	72	339	227	277	303	76	225	355	155	71	443	70
Future Volume (vph)	72	339	227	277	303	76	225	355	155	71	443	70
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75		175	25		0	220		300	300		300
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.975				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	3539	1583	1770	3451	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.450			0.289			0.232			0.443		
Satd. Flow (perm)	838	3539	1583	538	3451	0	432	1863	1583	825	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			227		20				194			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.97	0.87	1.00	0.79	0.67	0.84	1.00	0.98	0.80	0.69	0.92	0.91
Adj. Flow (vph)	74	390	227	351	452	90	225	362	194	103	482	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	74	390	227	351	542	0	225	362	194	103	482	77
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	L NA	Left	Right	L NA	Left	Right	L NA	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40		40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
School PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	28.0		21.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	25.7%		19.3%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	22.0		16.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effct Green (s)	25.7	16.5	102.7	38.4	26.5		51.9	38.7	38.7	46.6	36.1	36.1
Actuated g/C Ratio	0.25	0.16	1.00	0.37	0.26		0.51	0.38	0.38	0.45	0.35	0.35
v/c Ratio	0.26	0.69	0.14	0.90	0.60		0.62	0.52	0.27	0.23	0.74	0.12
Control Delay (s/veh)	24.1	47.4	0.2	53.1	36.5		21.9	29.1	4.7	14.5	38.1	1.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	24.1	47.4	0.2	53.1	36.5		21.9	29.1	4.7	14.5	38.1	1.2
LOS	C	D	A	D	D		C	C	A	B	D	A
Approach Delay (s/veh)		29.4			43.0			21.0			30.1	
Approach LOS		C			D			C			C	
Queue Length 50th (ft)	32	132	0	182	167		77	184	0	33	282	0
Queue Length 95th (ft)	63	175	0	#247	162		136	307	33	50	#439	7
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	350	759	1583	393	939		377	702	717	513	654	640
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.21	0.51	0.14	0.89	0.58		0.60	0.52	0.27	0.20	0.74	0.12
Intersection Summary												
Area Type:	Other											
Cycle Length: 109												
Actuated Cycle Length: 102.7												
Natural Cycle: 80												
Control Type: Semi Act-Uncoord												
Maximum v/c Ratio: 0.90												
Intersection Signal Delay (s/veh): 31.4						Intersection LOS: C						
Intersection Capacity Utilization 81.3%						ICU Level of Service D						
Analysis Period (min) 15												
# 95th percentile volume exceeds capacity, queue may be longer.												
Queue shown is maximum after two cycles.												

Splits and Phases: 1: SH 83 & Walker Rd

#1 Ø1 17 s	#1 Ø2 43 s	#1 Ø3 21 s	#1 Ø4 28 s
#1 Ø5 17 s	#1 Ø6 43 s	#1 Ø7 17 s	#1 Ø8 32 s

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	86	225	170	189	275	55	250	445	189	62	497	58
Future Volume (vph)	86	225	170	189	275	55	250	445	189	62	497	58
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	265		330	0		0	455		400	435		435
Storage Lanes	1		1	1		0	1		1	1		1
Taper Length (ft)	75		175	25		0	220		300	300		300
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.973				0.850			0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1770	3539	1583	1770	3444	0	1770	1863	1583	1770	1863	1583
Flt Permitted	0.535			0.462			0.215			0.278		
Satd. Flow (perm)	997	3539	1583	861	3444	0	400	1863	1583	518	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			200		22				205			130
Link Speed (mph)		45			35			60			60	
Link Distance (ft)		734			692			827			592	
Travel Time (s)		11.1			13.5			9.4			6.7	
Peak Hour Factor	0.85	0.92	0.85	0.90	0.92	0.85	0.92	0.75	0.92	0.92	0.95	0.82
Adj. Flow (vph)	101	245	200	210	299	65	272	593	205	67	523	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	101	245	200	210	364	0	272	593	205	67	523	71
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	L NA	Left	Right	L NA	Left	Right	L NA	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	0	1	1		1	2	1	1	2	1
Detector Template								Thru	Right		Thru	Right
Leading Detector (ft)	40	40	0	40	40		40	100	20	40	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	0
Detector 1 Size(ft)	40	40		40	40		40	6	20	40	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type								Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	pm+pt	NA	Free	pm+pt	NA		pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8			2		2	6		6

2045 Background + Site PM
Lanes, Volumes, Timings

Synchro 11 Report
JAB

Lanes, Volumes, Timings
1: SH 83 & Walker Rd

2045 Background + Site
PM

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	6.0		5.0	6.0		5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	10.0	12.0		10.0	12.0		10.0	37.0	37.0	10.0	37.0	37.0
Total Split (s)	17.0	32.0		17.0	32.0		17.0	43.0	43.0	17.0	43.0	43.0
Total Split (%)	15.6%	29.4%		15.6%	29.4%		15.6%	39.4%	39.4%	15.6%	39.4%	39.4%
Maximum Green (s)	12.0	26.0		12.0	26.0		12.0	36.0	36.0	12.0	36.0	36.0
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.0		5.0	6.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None		None	None		None	Max	Max	None	Max	Max
Act Effct Green (s)	23.4	13.1	95.7	28.2	17.7		54.6	43.2	43.2	45.2	36.1	36.1
Actuated g/C Ratio	0.24	0.14	1.00	0.29	0.18		0.57	0.45	0.45	0.47	0.38	0.38
v/c Ratio	0.32	0.51	0.13	0.58	0.56		0.68	0.71	0.25	0.20	0.75	0.10
Control Delay (s/veh)	26.1	41.9	0.2	32.1	38.0		21.4	29.3	3.8	12.1	34.7	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	26.1	41.9	0.2	32.1	38.0		21.4	29.3	3.8	12.1	34.7	0.6
LOS	C	D	A	C	D		C	C	A	B	C	A
Approach Delay (s/veh)		23.7			35.8			22.4			28.8	
Approach LOS		C			D			C			C	
Queue Length 50th (ft)	45	75	0	99	105		77	295	0	17	273	0
Queue Length 95th (ft)	78	113	0	160	157		#171	380	46	42	#478	0
Internal Link Dist (ft)		654			612			747			512	
Turn Bay Length (ft)	265		330				455		400	435		435
Base Capacity (vph)	368	963	1583	367	953		400	841	827	428	702	677
Starvation Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0	0	0	0	0
Reduced v/c Ratio	0.27	0.25	0.13	0.57	0.38		0.68	0.71	0.25	0.16	0.75	0.10
Intersection Summary												
Area Type: Other												
Cycle Length: 109												
Actuated Cycle Length: 95.7												
Natural Cycle: 70												
Control Type: Semi Act-Uncoord												
Maximum v/c Ratio: 0.75												
Intersection Signal Delay (s/veh): 26.8 Intersection LOS: C												
Intersection Capacity Utilization 75.9% ICU Level of Service D												
Analysis Period (min) 15												
# 95th percentile volume exceeds capacity, queue may be longer.												
Queue shown is maximum after two cycles.												

Splits and Phases: 1: SH 83 & Walker Rd

#1 Ø1	#1 Ø2	#1 Ø3	#1 Ø4
17 s	43 s	17 s	32 s
#1 Ø5	#1 Ø6	#1 Ø7	#1 Ø8
17 s	43 s	17 s	32 s

Synchro Reports

LOS (TWSC) -- all

HCM 6th TWSC
3: Jane Lundeen Dr & North Access

ST Baseline + Site
AM

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	344	189	4
Future Vol, veh/h	0	1	0	344	189	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	43	87
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	374	440	5
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	443	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	615	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	615	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	10.9	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 615		-	-		
HCM Lane V/C Ratio	- 0.002		-	-		
HCM Control Delay (s)	- 10.9		-	-		
HCM Lane LOS	- B		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
4: Jane Lundeen Dr & Middle Access

ST Baseline + Site
AM

Intersection						
Int Delay, s/veh	0.8					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	32	0	2	312	188	2
Future Vol, veh/h	32	0	2	312	188	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	83	83	92	45	43	87
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	39	0	2	693	437	2
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	1135	438	439	0	-	0
Stage 1	438	-	-	-	-	-
Stage 2	697	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	224	619	1121	-	-	-
Stage 1	651	-	-	-	-	-
Stage 2	494	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	223	619	1121	-	-	-
Mov Cap-2 Maneuver	223	-	-	-	-	-
Stage 1	649	-	-	-	-	-
Stage 2	494	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	24.5	0		0		
HCM LOS	C					
Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR	
Capacity (veh/h)	1121	-	223	-	-	
HCM Lane V/C Ratio	0.002	-	0.173	-	-	
HCM Control Delay (s)	8.2	0	24.5	-	-	
HCM Lane LOS	A	A	C	-	-	
HCM 95th %tile Q(veh)	0	-	0.6	-	-	

HCM 6th TWSC
5: Jane Lundeen Dr & South Access

ST Baseline + Site
AM

Intersection						
Int Delay, s/veh	0.7					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	25	3	1	289	185	3
Future Vol, veh/h	25	3	1	289	185	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	155	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	92	45	43	87
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	32	4	1	642	430	3
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	1076	432	433	0	-	0
Stage 1	432	-	-	-	-	-
Stage 2	644	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	243	624	1127	-	-	-
Stage 1	655	-	-	-	-	-
Stage 2	523	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	243	624	1127	-	-	-
Mov Cap-2 Maneuver	243	-	-	-	-	-
Stage 1	654	-	-	-	-	-
Stage 2	523	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	21.1	0		0		
HCM LOS	C					
Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR	
Capacity (veh/h)	1127	-	260	-	-	
HCM Lane V/C Ratio	0.001	-	0.138	-	-	
HCM Control Delay (s)	8.2	-	21.1	-	-	
HCM Lane LOS	A	-	C	-	-	
HCM 95th %tile Q(veh)	0	-	0.5	-	-	

Intersection												
Int Delay, s/veh	0.6											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	24	1	0	31	0	2	0	2	0	0	0
Future Vol, veh/h	0	24	1	0	31	0	2	0	2	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	78	78	78	78	92	78	92	78	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	31	1	0	40	0	3	0	3	0	0	0
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	40	0	0	32	0	0	72	72	32	73	72	40
Stage 1	-	-	-	-	-	-	32	32	-	40	40	-
Stage 2	-	-	-	-	-	-	40	40	-	33	32	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1570	-	-	1580	-	-	919	818	1042	918	818	1031
Stage 1	-	-	-	-	-	-	984	868	-	975	862	-
Stage 2	-	-	-	-	-	-	975	862	-	983	868	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1570	-	-	1580	-	-	919	818	1042	916	818	1031
Mov Cap-2 Maneuver	-	-	-	-	-	-	919	818	-	916	818	-
Stage 1	-	-	-	-	-	-	984	868	-	975	862	-
Stage 2	-	-	-	-	-	-	975	862	-	981	868	-
Approach	EB			WB			NE			SW		
HCM Control Delay, s	0			0			8.7			0		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NELn1	EBL	EBT	EBR	WBL	WBT	WBRSWLn1					
Capacity (veh/h)	977	1570	-	-	1580	-	-					
HCM Lane V/C Ratio	0.005	-	-	-	-	-	-					
HCM Control Delay (s)	8.7	0	-	-	0	-	0					
HCM Lane LOS	A	A	-	-	A	-	A					
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-					

HCM 6th TWSC
3: Jane Lundeen Dr & North Access

ST Baseline + Site
School PM

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	297	143	11
Future Vol, veh/h	0	1	0	297	143	11
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	78	47	42	78
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	632	340	14
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	347	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	696	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	696	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	10.2	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 696		-	-		
HCM Lane V/C Ratio	- 0.002		-	-		
HCM Control Delay (s)	- 10.2		-	-		
HCM Lane LOS	- B		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
4: Jane Lundeen Dr & Middle Access

ST Baseline + Site
School PM

Intersection						
Int Delay, s/veh	0.5					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	16	0	4	281	140	3
Future Vol, veh/h	16	0	4	281	140	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	78	47	42	78
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	21	0	5	598	333	4
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	943	335	337	0	-	0
Stage 1	335	-	-	-	-	-
Stage 2	608	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	291	707	1222	-	-	-
Stage 1	725	-	-	-	-	-
Stage 2	543	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	289	707	1222	-	-	-
Mov Cap-2 Maneuver	289	-	-	-	-	-
Stage 1	721	-	-	-	-	-
Stage 2	543	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	18.4	0.1		0		
HCM LOS	C					
Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR	
Capacity (veh/h)	1222	-	289	-	-	
HCM Lane V/C Ratio	0.004	-	0.071	-	-	
HCM Control Delay (s)	8	0	18.4	-	-	
HCM Lane LOS	A	A	C	-	-	
HCM 95th %tile Q(veh)	0	-	0.2	-	-	

HCM 6th TWSC
5: Jane Lundeen Dr & South Access

ST Baseline + Site
School PM

Intersection						
Int Delay, s/veh	0.3					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	11	1	1	273	137	4
Future Vol, veh/h	11	1	1	273	137	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	155	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	78	47	42	78
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	14	1	1	581	326	5

Major/Minor	Minor2	Major1	Major2
Conflicting Flow All	912	329	331
Stage 1	329	-	-
Stage 2	583	-	-
Critical Hdwy	6.42	6.22	4.12
Critical Hdwy Stg 1	5.42	-	-
Critical Hdwy Stg 2	5.42	-	-
Follow-up Hdwy	3.518	3.318	2.218
Pot Cap-1 Maneuver	304	712	1228
Stage 1	729	-	-
Stage 2	558	-	-
Platoon blocked, %			
Mov Cap-1 Maneuver	304	712	1228
Mov Cap-2 Maneuver	304	-	-
Stage 1	728	-	-
Stage 2	558	-	-

Approach	EB	NB	SB
HCM Control Delay, s	16.9	0	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1228	-	319	-	-
HCM Lane V/C Ratio	0.001	-	0.048	-	-
HCM Control Delay (s)	7.9	-	16.9	-	-
HCM Lane LOS	A	-	C	-	-
HCM 95th %tile Q(veh)	0	-	0.2	-	-

Intersection												
Int Delay, s/veh	0.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	32	2	0	29	0	2	0	1	0	0	0
Future Vol, veh/h	0	32	2	0	29	0	2	0	1	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	78	78	78	78	92	78	92	78	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	41	3	0	37	0	3	0	1	0	0	0
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	37	0	0	44	0	0	80	80	43	80	81	37
Stage 1	-	-	-	-	-	-	43	43	-	37	37	-
Stage 2	-	-	-	-	-	-	37	37	-	43	44	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1574	-	-	1564	-	-	908	810	1027	908	809	1035
Stage 1	-	-	-	-	-	-	971	859	-	978	864	-
Stage 2	-	-	-	-	-	-	978	864	-	971	858	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1574	-	-	1564	-	-	908	810	1027	907	809	1035
Mov Cap-2 Maneuver	-	-	-	-	-	-	908	810	-	907	809	-
Stage 1	-	-	-	-	-	-	971	859	-	978	864	-
Stage 2	-	-	-	-	-	-	978	864	-	970	858	-
Approach	EB			WB			NE			SW		
HCM Control Delay, s	0			0			8.8			0		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NELn1	EBL	EBT	EBR	WBL	WBT	WBRSWLn1					
Capacity (veh/h)	944	1574	-	-	1564	-	-	-				
HCM Lane V/C Ratio	0.004	-	-	-	-	-	-	-				
HCM Control Delay (s)	8.8	0	-	-	0	-	-	-	0			
HCM Lane LOS	A	A	-	-	A	-	-	-	A			
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	-				

HCM 6th TWSC
3: Jane Lundeen Dr & North Access

ST Baseline + Site
PM

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	0	0	71	36	0
Future Vol, veh/h	0	0	0	71	36	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	87	60	47	83
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	0	118	77	0
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	77	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	984	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	984	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	0	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	-		-	-		
HCM Lane V/C Ratio	-		-	-		
HCM Control Delay (s)	-		0	-		
HCM Lane LOS	-		A	-		
HCM 95th %tile Q(veh)	-		-	-		

HCM 6th TWSC
4: Jane Lundeen Dr & Middle Access

ST Baseline + Site
PM

Intersection						
Int Delay, s/veh	1.4					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	34	0	8	117	65	13
Future Vol, veh/h	34	0	8	117	65	13
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	83	60	47	83
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	44	0	10	195	138	16
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	361	146	154	0	-	0
Stage 1	146	-	-	-	-	-
Stage 2	215	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	638	901	1426	-	-	-
Stage 1	881	-	-	-	-	-
Stage 2	821	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	633	901	1426	-	-	-
Mov Cap-2 Maneuver	633	-	-	-	-	-
Stage 1	874	-	-	-	-	-
Stage 2	821	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	11.1	0.4		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR	
Capacity (veh/h)	1426	-	633	-	-	
HCM Lane V/C Ratio	0.007	-	0.069	-	-	
HCM Control Delay (s)	7.5	0	11.1	-	-	
HCM Lane LOS	A	A	B	-	-	
HCM 95th %tile Q(veh)	0	-	0.2	-	-	

HCM 6th TWSC
5: Jane Lundeen Dr & South Access

ST Baseline + Site
PM

Intersection						
Int Delay, s/veh	1.4					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	31	0	4	95	49	16
Future Vol, veh/h	31	0	4	95	49	16
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	155	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	83	60	47	83
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	40	0	5	158	104	19

Major/Minor	Minor2	Major1	Major2
Conflicting Flow All	282	114	123
Stage 1	114	-	-
Stage 2	168	-	-
Critical Hdwy	6.42	6.22	4.12
Critical Hdwy Stg 1	5.42	-	-
Critical Hdwy Stg 2	5.42	-	-
Follow-up Hdwy	3.518	3.318	2.218
Pot Cap-1 Maneuver	708	939	1464
Stage 1	911	-	-
Stage 2	862	-	-
Platoon blocked, %			
Mov Cap-1 Maneuver	706	939	1464
Mov Cap-2 Maneuver	706	-	-
Stage 1	908	-	-
Stage 2	862	-	-

Approach	EB	NB	SB
HCM Control Delay, s	10.4	0.2	0
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1464	-	706	-	-
HCM Lane V/C Ratio	0.003	-	0.056	-	-
HCM Control Delay (s)	7.5	-	10.4	-	-
HCM Lane LOS	A	-	B	-	-
HCM 95th %tile Q(veh)	0	-	0.2	-	-

Intersection												
Int Delay, s/veh	0											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	2	0	0	4	0	0	0	0	0	0	0
Future Vol, veh/h	0	2	0	0	4	0	0	0	0	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	78	78	78	78	92	78	92	78	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	3	0	0	5	0	0	0	0	0	0	0
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	5	0	0	3	0	0	8	8	3	8	8	5
Stage 1	-	-	-	-	-	-	3	3	-	5	5	-
Stage 2	-	-	-	-	-	-	5	5	-	3	3	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1616	-	-	1619	-	-	1011	887	1081	1011	887	1078
Stage 1	-	-	-	-	-	-	1020	893	-	1017	892	-
Stage 2	-	-	-	-	-	-	1017	892	-	1020	893	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1616	-	-	1619	-	-	1011	887	1081	1011	887	1078
Mov Cap-2 Maneuver	-	-	-	-	-	-	1011	887	-	1011	887	-
Stage 1	-	-	-	-	-	-	1020	893	-	1017	892	-
Stage 2	-	-	-	-	-	-	1017	892	-	1020	893	-
Approach	EB			WB			NE			SW		
HCM Control Delay, s	0			0			0			0		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NELn1	EBL	EBT	EBR	WBL	WBT	WBRSWLn1					
Capacity (veh/h)	-	1616	-	-	1619	-	-	-	-	-	-	-
HCM Lane V/C Ratio	-	-	-	-	-	-	-	-	-	-	-	-
HCM Control Delay (s)	0	0	-	-	0	-	-	-	0			
HCM Lane LOS	A	A	-	-	A	-	-	-	A			
HCM 95th %tile Q(veh)	-	0	-	-	0	-	-	-	-			

Intersection						
Int Delay, s/veh	0.7					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	0	10	308	47	83	226
Future Vol, veh/h	0	10	308	47	83	226
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	155	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	45	92	92	43
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	11	684	51	90	526
Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	1416	710	0	0	735	0
Stage 1	710	-	-	-	-	-
Stage 2	706	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	151	434	-	-	870	-
Stage 1	487	-	-	-	-	-
Stage 2	489	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	135	434	-	-	870	-
Mov Cap-2 Maneuver	135	-	-	-	-	-
Stage 1	487	-	-	-	-	-
Stage 2	439	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	13.5	0	1.4			
HCM LOS	B					
Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT		
Capacity (veh/h)	-	-	434	870	-	
HCM Lane V/C Ratio	-	-	0.025	0.104	-	
HCM Control Delay (s)	-	-	13.5	9.6	-	
HCM Lane LOS	-	-	B	A	-	
HCM 95th %tile Q(veh)	-	-	0.1	0.3	-	

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 Background
AM

Intersection

Int Delay, s/veh 1

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	1	33	322	24	42	184
Future Vol, veh/h	1	33	322	24	42	184
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	155	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	78	78	25	92	92	43
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1	42	1288	26	46	428

Major/Minor	Minor1	Major1	Major2
Conflicting Flow All	1821	1301	0
Stage 1	1301	-	-
Stage 2	520	-	-
Critical Hdwy	6.42	6.22	-
Critical Hdwy Stg 1	5.42	-	-
Critical Hdwy Stg 2	5.42	-	-
Follow-up Hdwy	3.518	3.318	-
Pot Cap-1 Maneuver	85	197	-
Stage 1	255	-	-
Stage 2	597	-	-
Platoon blocked, %		-	-
Mov Cap-1 Maneuver	78	197	-
Mov Cap-2 Maneuver	78	-	-
Stage 1	255	-	-
Stage 2	545	-	-

Approach	WB	NB	SB
HCM Control Delay, s	29.7	0	1.2
HCM LOS	D		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	189	526
HCM Lane V/C Ratio	-	-	0.231	0.087
HCM Control Delay (s)	-	-	29.7	12.5
HCM Lane LOS	-	-	D	B
HCM 95th %tile Q(veh)	-	-	0.9	0.3

Intersection						
Int Delay, s/veh	1.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	2	69	285	0	0	147
Future Vol, veh/h	2	69	285	0	0	147
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	155	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	47	92	83	42
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	83	606	0	0	350
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	956	606	0	0	606	0
Stage 1	606	-	-	-	-	-
Stage 2	350	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	286	497	-	-	972	-
Stage 1	545	-	-	-	-	-
Stage 2	713	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	286	497	-	-	972	-
Mov Cap-2 Maneuver	286	-	-	-	-	-
Stage 1	545	-	-	-	-	-
Stage 2	713	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	14	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT	NBRWBLn1		SBL	SBT	
Capacity (veh/h)	-	-	487	972	-	
HCM Lane V/C Ratio	-	-	0.176	-	-	
HCM Control Delay (s)	-	-	14	0	-	
HCM Lane LOS	-	-	B	A	-	
HCM 95th %tile Q(veh)	-	-	0.6	0	-	

Intersection						
Int Delay, s/veh	0.6					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	1	24	261	9	26	162
Future Vol, veh/h	1	24	261	9	26	162
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	155	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	78	78	47	92	87	42
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1	31	555	10	30	386

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	1006	560	0	0	565
Stage 1	560	-	-	-	-
Stage 2	446	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	267	528	-	-	1007
Stage 1	572	-	-	-	-
Stage 2	645	-	-	-	-
Platoon blocked, %			-	-	-
Mov Cap-1 Maneuver	259	528	-	-	1007
Mov Cap-2 Maneuver	259	-	-	-	-
Stage 1	572	-	-	-	-
Stage 2	626	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	12.6	0	0.6
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	507	1007
HCM Lane V/C Ratio	-	-	0.063	0.03
HCM Control Delay (s)	-	-	12.6	8.7
HCM Lane LOS	-	-	B	A
HCM 95th %tile Q(veh)	-	-	0.2	0.1

Intersection						
Int Delay, s/veh	1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	1	28	131	6	8	72
Future Vol, veh/h	1	28	131	6	8	72
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	155	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	78	78	60	83	83	47
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1	36	218	7	10	153
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	395	222	0	0	225	0
Stage 1	222	-	-	-	-	-
Stage 2	173	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	610	818	-	-	1344	-
Stage 1	815	-	-	-	-	-
Stage 2	857	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	606	818	-	-	1344	-
Mov Cap-2 Maneuver	606	-	-	-	-	-
Stage 1	815	-	-	-	-	-
Stage 2	851	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	9.7	0		0.5		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBRWBLn1		SBL	SBT	
Capacity (veh/h)	-	-	808	1344	-	
HCM Lane V/C Ratio	-	-	0.046	0.007	-	
HCM Control Delay (s)	-	-	9.7	7.7	-	
HCM Lane LOS	-	-	A	A	-	
HCM 95th %tile Q(veh)	-	-	0.1	0	-	

Intersection						
Int Delay, s/veh	2.4					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Vol, veh/h	2	53	84	22	26	47
Future Vol, veh/h	2	53	84	22	26	47
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	155	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	83	83	60	83	83	47
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	64	140	27	31	100
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	316	154	0	0	167	0
Stage 1	154	-	-	-	-	-
Stage 2	162	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	677	892	-	-	1411	-
Stage 1	874	-	-	-	-	-
Stage 2	867	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	662	892	-	-	1411	-
Mov Cap-2 Maneuver	662	-	-	-	-	-
Stage 1	874	-	-	-	-	-
Stage 2	848	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	9.4	0		1.8		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBRWBLn1		SBL	SBT	
Capacity (veh/h)	-	- 881		1411	-	
HCM Lane V/C Ratio	-	- 0.075		0.022	-	
HCM Control Delay (s)	-	- 9.4		7.6	-	
HCM Lane LOS	-	- A		A	-	
HCM 95th %tile Q(veh)	-	- 0.2		0.1	-	

Intersection												
Int Delay, s/veh	1.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	11	1	0	9	0	2	0	2	0	0	0
Future Vol, veh/h	0	11	1	0	9	0	2	0	2	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	78	78	78	78	78	78
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	14	1	0	12	0	3	0	3	0	0	0
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	12	0	0	15	0	0	27	27	15	28	27	12
Stage 1	-	-	-	-	-	-	15	15	-	12	12	-
Stage 2	-	-	-	-	-	-	12	12	-	16	15	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1607	-	-	1603	-	-	983	866	1065	981	866	1069
Stage 1	-	-	-	-	-	-	1005	883	-	1009	886	-
Stage 2	-	-	-	-	-	-	1009	886	-	1004	883	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1607	-	-	1603	-	-	983	866	1065	979	866	1069
Mov Cap-2 Maneuver	-	-	-	-	-	-	983	866	-	979	866	-
Stage 1	-	-	-	-	-	-	1005	883	-	1009	886	-
Stage 2	-	-	-	-	-	-	1009	886	-	1002	883	-
Approach	EB			WB			NE			SW		
HCM Control Delay, s	0			0			8.5			0		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NELn1	EBL	EBT	EBR	WBL	WBT	WBRSWLn1					
Capacity (veh/h)	1022	1607	-	-	1603	-	-					
HCM Lane V/C Ratio	0.005	-	-	-	-	-	-					
HCM Control Delay (s)	8.5	0	-	-	0	-	0					
HCM Lane LOS	A	A	-	-	A	-	A					
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-					

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	389	316	4
Future Vol, veh/h	0	1	0	389	316	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	45	43	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	864	735	4
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	737	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	418	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	418	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	13.6	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 418		-	-		
HCM Lane V/C Ratio	- 0.003		-	-		
HCM Control Delay (s)	- 13.6		-	-		
HCM Lane LOS	- B		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

Intersection												
Int Delay, s/veh	2.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔		↗	↘	
Traffic Vol, veh/h	32	0	0	0	0	10	2	345	47	83	232	2
Future Vol, veh/h	32	0	0	0	0	10	2	345	47	83	232	2
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	92	92	92	92	45	92	92	43	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	39	0	0	0	0	11	2	767	51	90	540	2

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1523	1543	541	1518	1519	793	542	0	0	818	0	0
Stage 1	721	721	-	797	797	-	-	-	-	-	-	-
Stage 2	802	822	-	721	722	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	97	115	541	98	119	389	1027	-	-	810	-	-
Stage 1	419	432	-	380	399	-	-	-	-	-	-	-
Stage 2	378	388	-	419	431	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	86	102	541	89	105	389	1027	-	-	810	-	-
Mov Cap-2 Maneuver	86	102	-	89	105	-	-	-	-	-	-	-
Stage 1	417	384	-	378	397	-	-	-	-	-	-	-
Stage 2	366	386	-	372	383	-	-	-	-	-	-	-

Approach	EB		WB		NB		SB	
HCM Control Delay, s	77.2		14.5		0		1.4	
HCM LOS	F		B					

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR
Capacity (veh/h)	1027	-	-	86	389	810	-
HCM Lane V/C Ratio	0.002	-	-	0.448	0.028	0.111	-
HCM Control Delay (s)	8.5	0	-	77.2	14.5	10	-
HCM Lane LOS	A	A	-	F	B	B	-
HCM 95th %tile Q(veh)	0	-	-	1.9	0.1	0.4	-

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 Background + Site
AM

Intersection												
Int Delay, s/veh	1.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↗	↘		↗	↘	
Traffic Vol, veh/h	25	0	3	1	0	33	1	336	24	42	187	3
Future Vol, veh/h	25	0	3	1	0	33	1	336	24	42	187	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	27	0	3	1	0	36	1	365	26	46	203	3

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	695	690	205	678	678	378	206	0	0	391	0	0
Stage 1	297	297	-	380	380	-	-	-	-	-	-	-
Stage 2	398	393	-	298	298	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	357	368	836	366	374	669	1365	-	-	1168	-	-
Stage 1	712	668	-	642	614	-	-	-	-	-	-	-
Stage 2	628	606	-	711	667	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	327	353	836	354	359	669	1365	-	-	1168	-	-
Mov Cap-2 Maneuver	327	353	-	354	359	-	-	-	-	-	-	-
Stage 1	711	642	-	641	613	-	-	-	-	-	-	-
Stage 2	594	605	-	680	641	-	-	-	-	-	-	-

Approach	EB		WB		NB		SB	
HCM Control Delay, s	16.3		10.9		0		1.5	
HCM LOS	C		B					

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR
Capacity (veh/h)	1365	-	-	350 652	1168	-	-
HCM Lane V/C Ratio	0.001	-	-	0.087 0.057	0.039	-	-
HCM Control Delay (s)	7.6	-	-	16.3 10.9	8.2	-	-
HCM Lane LOS	A	-	-	C B	A	-	-
HCM 95th %tile Q(veh)	0	-	-	0.3 0.2	0.1	-	-

Intersection												
Int Delay, s/veh	1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Vol, veh/h	0	15	2	0	7	0	2	0	1	0	0	0
Future Vol, veh/h	0	15	2	0	7	0	2	0	1	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	78	78	78	78	92	78	92	78	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	19	3	0	9	0	3	0	1	0	0	0
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	9	0	0	22	0	0	30	30	21	30	31	9
Stage 1	-	-	-	-	-	-	21	21	-	9	9	-
Stage 2	-	-	-	-	-	-	9	9	-	21	22	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1611	-	-	1593	-	-	979	863	1056	979	862	1073
Stage 1	-	-	-	-	-	-	998	878	-	1012	888	-
Stage 2	-	-	-	-	-	-	1012	888	-	998	877	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1611	-	-	1593	-	-	979	863	1056	978	862	1073
Mov Cap-2 Maneuver	-	-	-	-	-	-	979	863	-	978	862	-
Stage 1	-	-	-	-	-	-	998	878	-	1012	888	-
Stage 2	-	-	-	-	-	-	1012	888	-	997	877	-
Approach	EB		WB				NE		SW			
HCM Control Delay, s	0		0				8.6		0			
HCM LOS							A		A			
Minor Lane/Major Mvmt	NELn1	EBL	EBT	EBR	WBL	WBT	WBRSWLn1					
Capacity (veh/h)	1003	1611	-	-	1593	-	-					
HCM Lane V/C Ratio	0.004	-	-	-	-	-	-					
HCM Control Delay (s)	8.6	0	-	-	0	-	0					
HCM Lane LOS	A	A	-	-	A	-	A					
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-					

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	390	159	11
Future Vol, veh/h	0	1	0	390	159	11
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	47	42	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	830	379	12
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	385	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	663	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	663	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	10.4	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 663		-	-		
HCM Lane V/C Ratio	- 0.002		-	-		
HCM Control Delay (s)	- 10.4		-	-		
HCM Lane LOS	- B		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

Intersection												
Int Delay, s/veh	1.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↗	↖	
Traffic Vol, veh/h	16	0	0	2	0	69	4	305	0	0	156	3
Future Vol, veh/h	16	0	0	2	0	69	4	305	0	0	156	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	92	47	92	87	42	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	21	0	0	2	0	83	4	649	0	0	371	3
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1072	1030	373	1030	1031	649	374	0	0	649	0	0
Stage 1	373	373	-	657	657	-	-	-	-	-	-	-
Stage 2	699	657	-	373	374	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	198	233	673	212	233	470	1184	-	-	937	-	-
Stage 1	648	618	-	454	462	-	-	-	-	-	-	-
Stage 2	430	462	-	648	618	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	162	232	673	211	232	470	1184	-	-	937	-	-
Mov Cap-2 Maneuver	162	232	-	211	232	-	-	-	-	-	-	-
Stage 1	645	618	-	452	460	-	-	-	-	-	-	-
Stage 2	352	460	-	648	618	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	30.4		14.8		0.1		0					
HCM LOS	D		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR				
Capacity (veh/h)	1184	-	-	162	454	937	-	-				
HCM Lane V/C Ratio	0.004	-	-	0.127	0.188	-	-	-				
HCM Control Delay (s)	8.1	0	-	30.4	14.8	0	-	-				
HCM Lane LOS	A	A	-	D	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.4	0.7	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 Background + Site
School PM

Intersection												
Int Delay, s/veh	1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↕	↕		↕	↕	
Traffic Vol, veh/h	11	0	1	1	0	24	1	273	9	26	138	4
Future Vol, veh/h	11	0	1	1	0	24	1	273	9	26	138	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	14	0	1	1	0	31	1	581	10	30	329	5

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	996	985	332	980	982	586	334	0	0	591	0	0
Stage 1	392	392	-	588	588	-	-	-	-	-	-	-
Stage 2	604	593	-	392	394	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	223	248	710	229	249	510	1225	-	-	985	-	-
Stage 1	633	606	-	495	496	-	-	-	-	-	-	-
Stage 2	485	493	-	633	605	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	204	240	710	223	241	510	1225	-	-	985	-	-
Mov Cap-2 Maneuver	204	240	-	223	241	-	-	-	-	-	-	-
Stage 1	632	588	-	495	496	-	-	-	-	-	-	-
Stage 2	455	493	-	613	587	-	-	-	-	-	-	-

Approach	EB		WB		NB		SB	
HCM Control Delay, s	22.9		12.9		0		0.7	
HCM LOS	C		B					

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR
Capacity (veh/h)	1225	-	-	217 485	985	-	-
HCM Lane V/C Ratio	0.001	-	-	0.071 0.066	0.03	-	-
HCM Control Delay (s)	7.9	-	-	22.9 12.9	8.8	-	-
HCM Lane LOS	A	-	-	C B	A	-	-
HCM 95th %tile Q(veh)	0	-	-	0.2 0.2	0.1	-	-

Intersection												
Int Delay, s/veh	1.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	0	21	3	0	6	0	2	0	1	0	1	1
Future Vol, veh/h	0	21	3	0	6	0	2	0	1	0	1	1
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	78	78	78	78	92	78	92	78	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	27	4	0	8	0	3	0	1	0	1	1
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	8	0	0	31	0	0	38	37	29	38	39	8
Stage 1	-	-	-	-	-	-	29	29	-	8	8	-
Stage 2	-	-	-	-	-	-	9	8	-	30	31	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1612	-	-	1582	-	-	967	855	1046	967	853	1074
Stage 1	-	-	-	-	-	-	988	871	-	1013	889	-
Stage 2	-	-	-	-	-	-	1012	889	-	987	869	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1612	-	-	1582	-	-	965	855	1046	966	853	1074
Mov Cap-2 Maneuver	-	-	-	-	-	-	965	855	-	966	853	-
Stage 1	-	-	-	-	-	-	988	871	-	1013	889	-
Stage 2	-	-	-	-	-	-	1010	889	-	986	869	-
Approach	EB			WB			NE			SW		
HCM Control Delay, s	0			0			8.6			8.8		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NELn1	EBL	EBT	EBR	WBL	WBT	WBRSWLn1					
Capacity (veh/h)	991	1612	-	-	1582	-	-	-	951			
HCM Lane V/C Ratio	0.004	-	-	-	-	-	-	-	0.002			
HCM Control Delay (s)	8.6	0	-	-	0	-	-	-	8.8			
HCM Lane LOS	A	A	-	-	A	-	-	-	A			
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	-	0			

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	199	96	13
Future Vol, veh/h	0	1	0	199	96	13
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	78	78	78	60	47	83
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	332	204	16
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	212	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	828	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	828	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	9.4	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 828		-	-		
HCM Lane V/C Ratio	- 0.002		-	-		
HCM Control Delay (s)	- 9.4		-	-		
HCM Lane LOS	- A		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

Intersection												
Int Delay, s/veh	1.5											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	17	0	0	1	0	28	5	152	6	8	84	5
Future Vol, veh/h	17	0	0	1	0	28	5	152	6	8	84	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	60	87	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	22	0	0	1	0	36	6	253	7	10	179	6
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	489	474	182	471	474	257	185	0	0	260	0	0
Stage 1	202	202	-	269	269	-	-	-	-	-	-	-
Stage 2	287	272	-	202	205	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	489	489	861	503	489	782	1390	-	-	1304	-	-
Stage 1	800	734	-	737	687	-	-	-	-	-	-	-
Stage 2	720	685	-	800	732	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	462	483	861	498	483	782	1390	-	-	1304	-	-
Mov Cap-2 Maneuver	462	483	-	498	483	-	-	-	-	-	-	-
Stage 1	796	728	-	733	684	-	-	-	-	-	-	-
Stage 2	684	682	-	794	726	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	13.2		9.9		0.2		0.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1390	-	-	462	767	1304	-	-				
HCM Lane V/C Ratio	0.004	-	-	0.047	0.048	0.007	-	-				
HCM Control Delay (s)	7.6	0	-	13.2	9.9	7.8	-	-				
HCM Lane LOS	A	A	-	B	A	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.2	0	-	-				

Intersection												
Int Delay, s/veh	2.5											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	12	0	2	2	0	53	1	98	22	26	54	5
Future Vol, veh/h	12	0	2	2	0	53	1	98	22	26	54	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	15	0	3	2	0	64	1	163	27	31	115	6
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	391	372	118	361	362	177	121	0	0	190	0	0
Stage 1	180	180	-	179	179	-	-	-	-	-	-	-
Stage 2	211	192	-	182	183	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	568	558	934	595	565	866	1467	-	-	1384	-	-
Stage 1	822	750	-	823	751	-	-	-	-	-	-	-
Stage 2	791	742	-	820	748	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	517	545	934	583	552	866	1467	-	-	1384	-	-
Mov Cap-2 Maneuver	517	545	-	583	552	-	-	-	-	-	-	-
Stage 1	821	734	-	822	750	-	-	-	-	-	-	-
Stage 2	732	741	-	799	732	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11.7		9.6		0		1.6					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1467	-	-	552	851	1384	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.033	0.078	0.023	-	-				
HCM Control Delay (s)	7.5	-	-	11.7	9.6	7.7	-	-				
HCM Lane LOS	A	-	-	B	A	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Synchro Reports

Option A

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	434	452	1
Future Vol, veh/h	0	1	0	434	452	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	45	43	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	964	1051	1
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	1052	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	275	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	275	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	18.1	0		0		
HCM LOS	C					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 275		-	-		
HCM Lane V/C Ratio	- 0.004		-	-		
HCM Control Delay (s)	- 18.1		-	-		
HCM Lane LOS	- C		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
AM (Option A)

Intersection												
Int Delay, s/veh	0.9											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔		↗	↘	
Traffic Vol, veh/h	0	0	42	0	0	0	3	450	47	83	283	3
Future Vol, veh/h	0	0	42	0	0	0	3	450	47	83	283	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	78	78	78	92	45	92	92	43	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	51	0	0	0	3	1000	51	90	658	3

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1872	1897	660	1897	1873	1026	661	0	0	1051	0	0
Stage 1	840	840	-	1032	1032	-	-	-	-	-	-	-
Stage 2	1032	1057	-	865	841	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	55	69	463	53	72	285	927	-	-	662	-	-
Stage 1	360	381	-	281	310	-	-	-	-	-	-	-
Stage 2	281	302	-	348	380	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	49	59	463	42	62	285	927	-	-	662	-	-
Mov Cap-2 Maneuver	49	59	-	42	62	-	-	-	-	-	-	-
Stage 1	357	329	-	279	308	-	-	-	-	-	-	-
Stage 2	279	300	-	268	328	-	-	-	-	-	-	-

Approach	EB		WB		NB		SB	
HCM Control Delay, s	13.7		0		0		1.4	
HCM LOS	B		A					

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR
Capacity (veh/h)	927	-	-	463	-	662	-
HCM Lane V/C Ratio	0.004	-	-	0.109	-	0.136	-
HCM Control Delay (s)	8.9	0	-	13.7	0	11.3	-
HCM Lane LOS	A	A	-	B	A	B	-
HCM 95th %tile Q(veh)	0	-	-	0.4	-	0.5	-

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
AM (Option A)

Intersection												
Int Delay, s/veh	1.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↵	↵		↵	↵	
Traffic Vol, veh/h	6	0	14	1	0	33	1	428	24	42	238	3
Future Vol, veh/h	6	0	14	1	0	33	1	428	24	42	238	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	92	45	92	87	43	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	8	0	18	1	0	42	1	951	26	48	553	3
Major/Minor	Minor2		Minor1			Major1			Major2			
Conflicting Flow All	1638	1630	555	1626	1618	964	556	0	0	977	0	0
Stage 1	651	651	-	966	966	-	-	-	-	-	-	-
Stage 2	987	979	-	660	652	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	80	102	531	82	103	310	1015	-	-	706	-	-
Stage 1	457	465	-	306	333	-	-	-	-	-	-	-
Stage 2	298	328	-	452	464	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	65	95	531	75	96	310	1015	-	-	706	-	-
Mov Cap-2 Maneuver	65	95	-	75	96	-	-	-	-	-	-	-
Stage 1	457	433	-	306	333	-	-	-	-	-	-	-
Stage 2	257	328	-	407	432	-	-	-	-	-	-	-
Approach	EB		WB			NB			SB			
HCM Control Delay, s	30.1		20			0			0.8			
HCM LOS	D		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR				
Capacity (veh/h)	1015	-	-	169	284	706	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.152	0.153	0.068	-	-				
HCM Control Delay (s)	8.6	-	-	30.1	20	10.5	-	-				
HCM Lane LOS	A	-	-	D	C	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.5	0.5	0.2	-	-				

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	0	0	491	185	2
Future Vol, veh/h	0	0	0	491	185	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	47	42	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	0	1045	440	2
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	441	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	616	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	616	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	0	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	-		-	-		
HCM Lane V/C Ratio	-		-	-		
HCM Control Delay (s)	-		0	-		
HCM Lane LOS	-		A	-		
HCM 95th %tile Q(veh)	-		-	-		

Intersection												
Int Delay, s/veh	1.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↕	↕	
Traffic Vol, veh/h	0	0	20	2	0	69	7	353	0	0	179	6
Future Vol, veh/h	0	0	20	2	0	69	7	353	0	0	179	6
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	92	47	92	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	26	2	0	83	8	751	0	0	426	7
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1239	1197	430	1210	1200	751	433	0	0	751	0	0
Stage 1	430	430	-	767	767	-	-	-	-	-	-	-
Stage 2	809	767	-	443	433	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	152	186	625	159	185	411	1127	-	-	858	-	-
Stage 1	603	583	-	395	411	-	-	-	-	-	-	-
Stage 2	374	411	-	594	582	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	120	184	625	151	183	411	1127	-	-	858	-	-
Mov Cap-2 Maneuver	120	184	-	151	183	-	-	-	-	-	-	-
Stage 1	596	583	-	390	406	-	-	-	-	-	-	-
Stage 2	295	406	-	570	582	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11		16.7		0.1		0					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1127	-	-	625	392	858	-	-				
HCM Lane V/C Ratio	0.007	-	-	0.041	0.218	-	-	-				
HCM Control Delay (s)	8.2	0	-	11	16.7	0	-	-				
HCM Lane LOS	A	A	-	B	C	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.8	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
School PM (Option A)

Intersection												
Int Delay, s/veh	0.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	3	0	6	1	0	24	1	334	9	26	180	4
Future Vol, veh/h	3	0	6	1	0	24	1	334	9	26	180	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	0	8	1	0	31	1	711	10	30	429	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1226	1215	432	1214	1212	716	434	0	0	721	0	0
Stage 1	492	492	-	718	718	-	-	-	-	-	-	-
Stage 2	734	723	-	496	494	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	155	181	624	158	182	430	1126	-	-	881	-	-
Stage 1	558	548	-	420	433	-	-	-	-	-	-	-
Stage 2	412	431	-	556	546	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	140	175	624	152	176	430	1126	-	-	881	-	-
Mov Cap-2 Maneuver	140	175	-	152	176	-	-	-	-	-	-	-
Stage 1	557	529	-	420	433	-	-	-	-	-	-	-
Stage 2	382	431	-	530	527	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	17.9		14.8		0		0.6					
HCM LOS	C		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1126	-	-	290	401	881	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.04	0.08	0.034	-	-				
HCM Control Delay (s)	8.2	-	-	17.9	14.8	9.2	-	-				
HCM Lane LOS	A	-	-	C	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations		↗		↑	↘	
Traffic Vol, veh/h	0	1	0	294	135	3
Future Vol, veh/h	0	1	0	294	135	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	60	47	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	490	287	3
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	289	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	750	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	750	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	9.8	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 750		-	-		
HCM Lane V/C Ratio	- 0.001		-	-		
HCM Control Delay (s)	- 9.8		-	-		
HCM Lane LOS	- A		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
PM (Option A)

Intersection												
Int Delay, s/veh	1.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	8	0	11	1	0	28	9	217	6	8	111	8
Future Vol, veh/h	8	0	11	1	0	28	9	217	6	8	111	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	60	87	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	10	0	14	1	0	36	10	362	7	10	236	10
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	665	650	241	654	652	366	246	0	0	369	0	0
Stage 1	261	261	-	386	386	-	-	-	-	-	-	-
Stage 2	404	389	-	268	266	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	374	388	798	380	387	679	1320	-	-	1190	-	-
Stage 1	744	692	-	637	610	-	-	-	-	-	-	-
Stage 2	623	608	-	738	689	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	349	381	798	368	380	679	1320	-	-	1190	-	-
Mov Cap-2 Maneuver	349	381	-	368	380	-	-	-	-	-	-	-
Stage 1	737	686	-	631	604	-	-	-	-	-	-	-
Stage 2	584	602	-	719	683	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	12.3		10.8		0.2		0.3					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1320	-	-	518	660	1190	-	-				
HCM Lane V/C Ratio	0.008	-	-	0.047	0.056	0.008	-	-				
HCM Control Delay (s)	7.7	0	-	12.3	10.8	8.1	-	-				
HCM Lane LOS	A	A	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.2	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
PM (Option A)

Intersection												
Int Delay, s/veh	2.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	13	0	16	2	0	53	4	149	22	26	76	16
Future Vol, veh/h	13	0	16	2	0	53	4	149	22	26	76	16
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	17	0	21	2	0	64	5	248	27	31	162	19
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	538	519	172	516	515	262	181	0	0	275	0	0
Stage 1	234	234	-	272	272	-	-	-	-	-	-	-
Stage 2	304	285	-	244	243	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	454	461	872	470	464	777	1394	-	-	1288	-	-
Stage 1	769	711	-	734	685	-	-	-	-	-	-	-
Stage 2	705	676	-	760	705	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	408	448	872	449	451	777	1394	-	-	1288	-	-
Mov Cap-2 Maneuver	408	448	-	449	451	-	-	-	-	-	-	-
Stage 1	766	694	-	731	682	-	-	-	-	-	-	-
Stage 2	645	673	-	724	688	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11.7		10.2		0.1		1.2					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1394	-	-	578	757	1288	-	-				
HCM Lane V/C Ratio	0.003	-	-	0.064	0.088	0.024	-	-				
HCM Control Delay (s)	7.6	-	-	11.7	10.2	7.9	-	-				
HCM Lane LOS	A	-	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.2	0.3	0.1	-	-				

Synchro Reports

Option B

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	0	0	482	455	3
Future Vol, veh/h	0	0	0	482	455	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	45	43	83
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	0	1071	1058	4
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	- 1060	-	0	-	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	- 6.22	-	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	- 3.318	-	-	-	-	-
Pot Cap-1 Maneuver	0 272	0	-	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	- 272	-	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	0	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	-		-	-		
HCM Lane V/C Ratio	-		-	-		
HCM Control Delay (s)	-		0	-		
HCM Lane LOS	-		A	-		
HCM 95th %tile Q(veh)	-		-	-		

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
AM (Option B)

Intersection												
Int Delay, s/veh	1.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔		↗	↘	
Traffic Vol, veh/h	0	0	83	0	0	0	10	498	47	83	282	8
Future Vol, veh/h	0	0	83	0	0	0	10	498	47	83	282	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	78	78	78	92	45	92	92	43	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	100	0	0	0	11	1107	51	90	656	9
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1996	2021	661	2046	2000	1133	665	0	0	1158	0	0
Stage 1	841	841	-	1155	1155	-	-	-	-	-	-	-
Stage 2	1155	1180	-	891	845	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	45	58	462	41	60	247	924	-	-	603	-	-
Stage 1	359	380	-	240	271	-	-	-	-	-	-	-
Stage 2	240	264	-	337	379	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	39	48	462	28	49	247	924	-	-	603	-	-
Mov Cap-2 Maneuver	39	48	-	28	49	-	-	-	-	-	-	-
Stage 1	347	323	-	232	262	-	-	-	-	-	-	-
Stage 2	232	255	-	225	323	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	14.9		0		0.1		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	924	-	-	462	-	603	-	-	-	-	-	-
HCM Lane V/C Ratio	0.012	-	-	0.216	-	0.15	-	-	-	-	-	-
HCM Control Delay (s)	8.9	0	-	14.9	0	12	-	-	-	-	-	-
HCM Lane LOS	A	A	-	B	A	B	-	-	-	-	-	-
HCM 95th %tile Q(veh)	0	-	-	0.8	-	0.5	-	-	-	-	-	-

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
AM (Option B)

Intersection												
Int Delay, s/veh	1.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	22	1	0	33	6	488	24	42	279	2
Future Vol, veh/h	0	0	22	1	0	33	6	488	24	42	279	2
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	92	45	92	87	43	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	28	1	0	42	7	1084	26	48	649	2
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1878	1870	650	1871	1858	1097	651	0	0	1110	0	0
Stage 1	746	746	-	1111	1111	-	-	-	-	-	-	-
Stage 2	1132	1124	-	760	747	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	54	72	469	55	73	259	935	-	-	629	-	-
Stage 1	405	421	-	254	285	-	-	-	-	-	-	-
Stage 2	247	281	-	398	420	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	42	66	469	48	67	259	935	-	-	629	-	-
Mov Cap-2 Maneuver	42	66	-	48	67	-	-	-	-	-	-	-
Stage 1	402	389	-	252	283	-	-	-	-	-	-	-
Stage 2	205	279	-	346	388	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	13.2		24.4		0.1		0.8					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	935	-	-	469	229	629	-	-				
HCM Lane V/C Ratio	0.007	-	-	0.06	0.19	0.077	-	-				
HCM Control Delay (s)	8.9	-	-	13.2	24.4	11.2	-	-				
HCM Lane LOS	A	-	-	B	C	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.2	0.7	0.2	-	-				

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations		↗		↑	↘	
Traffic Vol, veh/h	0	0	0	491	185	2
Future Vol, veh/h	0	0	0	491	185	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	47	42	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	0	1045	440	2
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	441	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	616	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	616	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	0	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	-		-	-		
HCM Lane V/C Ratio	-		-	-		
HCM Control Delay (s)	-		0	-		
HCM Lane LOS	-		A	-		
HCM 95th %tile Q(veh)	-		-	-		

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
School PM (Option B)

Intersection												
Int Delay, s/veh	1.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↗	↘	
Traffic Vol, veh/h	0	0	18	2	0	69	7	353	0	0	179	6
Future Vol, veh/h	0	0	18	2	0	69	7	353	0	0	179	6
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	92	47	92	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	23	2	0	83	8	751	0	0	426	7
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1239	1197	430	1208	1200	751	433	0	0	751	0	0
Stage 1	430	430	-	767	767	-	-	-	-	-	-	-
Stage 2	809	767	-	441	433	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	152	186	625	160	185	411	1127	-	-	858	-	-
Stage 1	603	583	-	395	411	-	-	-	-	-	-	-
Stage 2	374	411	-	595	582	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	120	184	625	153	183	411	1127	-	-	858	-	-
Mov Cap-2 Maneuver	120	184	-	153	183	-	-	-	-	-	-	-
Stage 1	596	583	-	390	406	-	-	-	-	-	-	-
Stage 2	295	406	-	573	582	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11		16.7		0.1		0					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1127	-	-	625	392	858	-	-				
HCM Lane V/C Ratio	0.007	-	-	0.037	0.218	-	-	-				
HCM Control Delay (s)	8.2	0	-	11	16.7	0	-	-				
HCM Lane LOS	A	A	-	B	C	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.8	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
School PM (Option B)

Intersection												
Int Delay, s/veh	0.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	11	1	0	24	1	337	9	26	178	4
Future Vol, veh/h	0	0	11	1	0	24	1	337	9	26	178	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	14	1	0	31	1	717	10	30	424	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1227	1216	427	1218	1213	722	429	0	0	727	0	0
Stage 1	487	487	-	724	724	-	-	-	-	-	-	-
Stage 2	740	729	-	494	489	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	155	181	628	157	182	427	1130	-	-	876	-	-
Stage 1	562	550	-	417	430	-	-	-	-	-	-	-
Stage 2	409	428	-	557	549	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	140	175	628	149	176	427	1130	-	-	876	-	-
Mov Cap-2 Maneuver	140	175	-	149	176	-	-	-	-	-	-	-
Stage 1	561	531	-	417	430	-	-	-	-	-	-	-
Stage 2	379	428	-	526	530	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.9		14.9		0		0.6					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1130	-	-	628	397	876	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.022	0.081	0.034	-	-				
HCM Control Delay (s)	8.2	-	-	10.9	14.9	9.3	-	-				
HCM Lane LOS	A	-	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	284	135	3
Future Vol, veh/h	0	1	0	284	135	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	60	47	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	473	287	3
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	289	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	750	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	750	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	9.8	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 750		-	-		
HCM Lane V/C Ratio	- 0.001		-	-		
HCM Control Delay (s)	- 9.8		-	-		
HCM Lane LOS	- A		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
PM (Option B)

Intersection												
Int Delay, s/veh	1.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↕	↕	
Traffic Vol, veh/h	8	0	11	1	0	28	9	217	6	8	111	8
Future Vol, veh/h	8	0	11	1	0	28	9	217	6	8	111	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	60	87	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	10	0	14	1	0	36	10	362	7	10	236	10
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	665	650	241	654	652	366	246	0	0	369	0	0
Stage 1	261	261	-	386	386	-	-	-	-	-	-	-
Stage 2	404	389	-	268	266	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	374	388	798	380	387	679	1320	-	-	1190	-	-
Stage 1	744	692	-	637	610	-	-	-	-	-	-	-
Stage 2	623	608	-	738	689	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	349	381	798	368	380	679	1320	-	-	1190	-	-
Mov Cap-2 Maneuver	349	381	-	368	380	-	-	-	-	-	-	-
Stage 1	737	686	-	631	604	-	-	-	-	-	-	-
Stage 2	584	602	-	719	683	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	12.3		10.8		0.2		0.3					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1320	-	-	518	660	1190	-	-				
HCM Lane V/C Ratio	0.008	-	-	0.047	0.056	0.008	-	-				
HCM Control Delay (s)	7.7	0	-	12.3	10.8	8.1	-	-				
HCM Lane LOS	A	A	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.2	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
PM (Option B)

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Future Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	0	9	2	0	64	1	202	27	31	140	6
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	455	436	143	428	426	216	146	0	0	229	0	0
Stage 1	205	205	-	218	218	-	-	-	-	-	-	-
Stage 2	250	231	-	210	208	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	515	514	905	537	520	824	1436	-	-	1339	-	-
Stage 1	797	732	-	784	723	-	-	-	-	-	-	-
Stage 2	754	713	-	792	730	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	467	502	905	522	508	824	1436	-	-	1339	-	-
Mov Cap-2 Maneuver	467	502	-	522	508	-	-	-	-	-	-	-
Stage 1	796	715	-	783	722	-	-	-	-	-	-	-
Stage 2	695	712	-	766	713	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.7		9.9		0		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1436	-	-	651	807	1339	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.024	0.082	0.023	-	-				
HCM Control Delay (s)	7.5	-	-	10.7	9.9	7.8	-	-				
HCM Lane LOS	A	-	-	B	A	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Synchro Reports

Option C

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	434	452	1
Future Vol, veh/h	0	1	0	434	452	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	45	43	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	964	1051	1
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	1052	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	275	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	275	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	18.1	0		0		
HCM LOS	C					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 275		-	-		
HCM Lane V/C Ratio	- 0.004		-	-		
HCM Control Delay (s)	- 18.1		-	-		
HCM Lane LOS	- C		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
AM (Option C)

Intersection												
Int Delay, s/veh	1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	15	1	0	33	1	409	24	42	217	3
Future Vol, veh/h	0	0	15	1	0	33	1	409	24	42	217	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	92	45	92	87	43	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	19	1	0	42	1	909	26	48	505	3
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1548	1540	507	1536	1528	922	508	0	0	935	0	0
Stage 1	603	603	-	924	924	-	-	-	-	-	-	-
Stage 2	945	937	-	612	604	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	93	115	566	95	117	327	1057	-	-	732	-	-
Stage 1	486	488	-	323	348	-	-	-	-	-	-	-
Stage 2	314	343	-	480	488	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	77	107	566	87	109	327	1057	-	-	732	-	-
Mov Cap-2 Maneuver	77	107	-	87	109	-	-	-	-	-	-	-
Stage 1	486	456	-	323	348	-	-	-	-	-	-	-
Stage 2	273	343	-	433	456	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11.6		18.9		0		0.9					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1057	-	-	566	302	732	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.034	0.144	0.066	-	-				
HCM Control Delay (s)	8.4	-	-	11.6	18.9	10.3	-	-				
HCM Lane LOS	A	-	-	B	C	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.5	0.2	-	-				

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	0	1	0	491	185	2
Future Vol, veh/h	0	1	0	491	185	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	47	42	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	1045	440	2
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	441	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	616	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	616	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	10.9	0		0		
HCM LOS	B					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 616		-	-		
HCM Lane V/C Ratio	- 0.002		-	-		
HCM Control Delay (s)	- 10.9		-	-		
HCM Lane LOS	- B		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
School PM (Option C)

Intersection												
Int Delay, s/veh	0.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	7	1	0	24	1	323	9	26	169	4
Future Vol, veh/h	0	0	7	1	0	24	1	323	9	26	169	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	9	1	0	31	1	687	10	30	402	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1175	1164	405	1163	1161	692	407	0	0	697	0	0
Stage 1	465	465	-	694	694	-	-	-	-	-	-	-
Stage 2	710	699	-	469	467	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	168	194	646	172	195	444	1152	-	-	899	-	-
Stage 1	578	563	-	433	444	-	-	-	-	-	-	-
Stage 2	424	442	-	575	562	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	152	187	646	165	188	444	1152	-	-	899	-	-
Mov Cap-2 Maneuver	152	187	-	165	188	-	-	-	-	-	-	-
Stage 1	577	544	-	433	444	-	-	-	-	-	-	-
Stage 2	394	442	-	548	543	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.7		14.4		0		0.6					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1152	-	-	646	416	899	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.014	0.077	0.033	-	-				
HCM Control Delay (s)	8.1	-	-	10.7	14.4	9.1	-	-				
HCM Lane LOS	A	-	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0	0.2	0.1	-	-				

Intersection						
Int Delay, s/veh	0					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations		↗		↑	↘	
Traffic Vol, veh/h	0	1	0	284	135	3
Future Vol, veh/h	0	1	0	284	135	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	-	0	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	60	47	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	1	0	473	287	3
Major/Minor	Minor2	Major1		Major2		
Conflicting Flow All	-	289	-	0	-	0
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.22	-	-	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.318	-	-	-	-
Pot Cap-1 Maneuver	0	750	0	-	-	-
Stage 1	0	-	0	-	-	-
Stage 2	0	-	0	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	-	750	-	-	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	NB		SB		
HCM Control Delay, s	9.8	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT EBLn1		SBT	SBR		
Capacity (veh/h)	- 750		-	-		
HCM Lane V/C Ratio	- 0.001		-	-		
HCM Control Delay (s)	- 9.8		-	-		
HCM Lane LOS	- A		-	-		
HCM 95th %tile Q(veh)	- 0		-	-		

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
PM (Option C)

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↕	↕		↕	↕	
Traffic Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Future Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	0	9	2	0	64	1	202	27	31	140	6

Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	455	436	143	428	426	216	146	0	0	229	0	0
Stage 1	205	205	-	218	218	-	-	-	-	-	-	-
Stage 2	250	231	-	210	208	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	515	514	905	537	520	824	1436	-	-	1339	-	-
Stage 1	797	732	-	784	723	-	-	-	-	-	-	-
Stage 2	754	713	-	792	730	-	-	-	-	-	-	-
Platoon blocked, %								-	-	-	-	-
Mov Cap-1 Maneuver	467	502	905	522	508	824	1436	-	-	1339	-	-
Mov Cap-2 Maneuver	467	502	-	522	508	-	-	-	-	-	-	-
Stage 1	796	715	-	783	722	-	-	-	-	-	-	-
Stage 2	695	712	-	766	713	-	-	-	-	-	-	-

Approach	EB		WB		NB		SB	
HCM Control Delay, s	10.7		9.9		0		1.4	
HCM LOS	B		A					

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR
Capacity (veh/h)	1436	-	-	651 807	1339	-	-
HCM Lane V/C Ratio	0.001	-	-	0.024 0.082	0.023	-	-
HCM Control Delay (s)	7.5	-	-	10.7 9.9	7.8	-	-
HCM Lane LOS	A	-	-	B A	A	-	-
HCM 95th %tile Q(veh)	0	-	-	0.1 0.3	0.1	-	-

Synchro Reports

Option D

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
AM (Option D)

Intersection												
Int Delay, s/veh	0.9											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	42	0	0	0	3	450	47	83	283	4
Future Vol, veh/h	0	0	42	0	0	0	3	450	47	83	283	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	78	78	78	92	45	92	92	43	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	51	0	0	0	3	1000	51	90	658	4
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1872	1897	660	1898	1874	1026	662	0	0	1051	0	0
Stage 1	840	840	-	1032	1032	-	-	-	-	-	-	-
Stage 2	1032	1057	-	866	842	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	55	69	463	53	72	285	927	-	-	662	-	-
Stage 1	360	381	-	281	310	-	-	-	-	-	-	-
Stage 2	281	302	-	348	380	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	49	59	463	42	62	285	927	-	-	662	-	-
Mov Cap-2 Maneuver	49	59	-	42	62	-	-	-	-	-	-	-
Stage 1	357	329	-	279	308	-	-	-	-	-	-	-
Stage 2	279	300	-	268	328	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	13.7		0		0		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	927	-	-	463	-	662	-	-				
HCM Lane V/C Ratio	0.004	-	-	0.109	-	0.136	-	-				
HCM Control Delay (s)	8.9	0	-	13.7	0	11.3	-	-				
HCM Lane LOS	A	A	-	B	A	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.4	-	0.5	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
AM (Option D)

Intersection												
Int Delay, s/veh	1.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	6	0	14	1	0	33	1	428	24	42	238	3
Future Vol, veh/h	6	0	14	1	0	33	1	428	24	42	238	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	92	45	92	87	43	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	8	0	18	1	0	42	1	951	26	48	553	3
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1638	1630	555	1626	1618	964	556	0	0	977	0	0
Stage 1	651	651	-	966	966	-	-	-	-	-	-	-
Stage 2	987	979	-	660	652	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	80	102	531	82	103	310	1015	-	-	706	-	-
Stage 1	457	465	-	306	333	-	-	-	-	-	-	-
Stage 2	298	328	-	452	464	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	65	95	531	75	96	310	1015	-	-	706	-	-
Mov Cap-2 Maneuver	65	95	-	75	96	-	-	-	-	-	-	-
Stage 1	457	433	-	306	333	-	-	-	-	-	-	-
Stage 2	257	328	-	407	432	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	30.1		20		0		0.8					
HCM LOS	D		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1015	-	-	169	284	706	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.152	0.153	0.068	-	-				
HCM Control Delay (s)	8.6	-	-	30.1	20	10.5	-	-				
HCM Lane LOS	A	-	-	D	C	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.5	0.5	0.2	-	-				

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
School PM (Option D)

Intersection												
Int Delay, s/veh	1.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↕	↕	
Traffic Vol, veh/h	0	0	20	2	0	69	7	353	0	0	179	8
Future Vol, veh/h	0	0	20	2	0	69	7	353	0	0	179	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	92	47	92	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	26	2	0	83	8	751	0	0	426	9
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1240	1198	431	1211	1202	751	435	0	0	751	0	0
Stage 1	431	431	-	767	767	-	-	-	-	-	-	-
Stage 2	809	767	-	444	435	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	152	186	624	159	185	411	1125	-	-	858	-	-
Stage 1	603	583	-	395	411	-	-	-	-	-	-	-
Stage 2	374	411	-	593	580	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	120	184	624	151	183	411	1125	-	-	858	-	-
Mov Cap-2 Maneuver	120	184	-	151	183	-	-	-	-	-	-	-
Stage 1	596	583	-	390	406	-	-	-	-	-	-	-
Stage 2	295	406	-	569	580	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11		16.7		0.1		0					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR				
Capacity (veh/h)	1125	-	-	624	392	858	-	-				
HCM Lane V/C Ratio	0.007	-	-	0.041	0.218	-	-	-				
HCM Control Delay (s)	8.2	0	-	11	16.7	0	-	-				
HCM Lane LOS	A	A	-	B	C	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.8	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
School PM (Option D)

Intersection												
Int Delay, s/veh	0.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	3	0	6	1	0	24	1	334	9	26	180	4
Future Vol, veh/h	3	0	6	1	0	24	1	334	9	26	180	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	0	8	1	0	31	1	711	10	30	429	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1226	1215	432	1214	1212	716	434	0	0	721	0	0
Stage 1	492	492	-	718	718	-	-	-	-	-	-	-
Stage 2	734	723	-	496	494	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	155	181	624	158	182	430	1126	-	-	881	-	-
Stage 1	558	548	-	420	433	-	-	-	-	-	-	-
Stage 2	412	431	-	556	546	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	140	175	624	152	176	430	1126	-	-	881	-	-
Mov Cap-2 Maneuver	140	175	-	152	176	-	-	-	-	-	-	-
Stage 1	557	529	-	420	433	-	-	-	-	-	-	-
Stage 2	382	431	-	530	527	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	17.9		14.8		0		0.6					
HCM LOS	C		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1126	-	-	290	401	881	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.04	0.08	0.034	-	-				
HCM Control Delay (s)	8.2	-	-	17.9	14.8	9.2	-	-				
HCM Lane LOS	A	-	-	C	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
PM (Option D)

Intersection												
Int Delay, s/veh	1.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↗	↘	
Traffic Vol, veh/h	8	0	11	1	0	28	9	217	6	8	111	11
Future Vol, veh/h	8	0	11	1	0	28	9	217	6	8	111	11
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	60	87	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	10	0	14	1	0	36	10	362	7	10	236	13
Major/Minor	Minor2		Minor1			Major1			Major2			
Conflicting Flow All	667	652	243	656	655	366	249	0	0	369	0	0
Stage 1	263	263	-	386	386	-	-	-	-	-	-	-
Stage 2	404	389	-	270	269	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	372	387	796	379	386	679	1317	-	-	1190	-	-
Stage 1	742	691	-	637	610	-	-	-	-	-	-	-
Stage 2	623	608	-	736	687	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	347	380	796	367	379	679	1317	-	-	1190	-	-
Mov Cap-2 Maneuver	347	380	-	367	379	-	-	-	-	-	-	-
Stage 1	735	685	-	631	604	-	-	-	-	-	-	-
Stage 2	584	602	-	717	682	-	-	-	-	-	-	-
Approach	EB		WB			NB			SB			
HCM Control Delay, s	12.3		10.8			0.2			0.3			
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR				
Capacity (veh/h)	1317	-	-	515	660	1190	-	-				
HCM Lane V/C Ratio	0.008	-	-	0.047	0.056	0.008	-	-				
HCM Control Delay (s)	7.8	0	-	12.3	10.8	8.1	-	-				
HCM Lane LOS	A	A	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.2	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
PM (Option D)

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↕	↕		↕	↕	
Traffic Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Future Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	0	9	2	0	64	1	202	27	31	140	6
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	455	436	143	428	426	216	146	0	0	229	0	0
Stage 1	205	205	-	218	218	-	-	-	-	-	-	-
Stage 2	250	231	-	210	208	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	515	514	905	537	520	824	1436	-	-	1339	-	-
Stage 1	797	732	-	784	723	-	-	-	-	-	-	-
Stage 2	754	713	-	792	730	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	467	502	905	522	508	824	1436	-	-	1339	-	-
Mov Cap-2 Maneuver	467	502	-	522	508	-	-	-	-	-	-	-
Stage 1	796	715	-	783	722	-	-	-	-	-	-	-
Stage 2	695	712	-	766	713	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.7		9.9		0		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1436	-	-	651	807	1339	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.024	0.082	0.023	-	-				
HCM Control Delay (s)	7.5	-	-	10.7	9.9	7.8	-	-				
HCM Lane LOS	A	-	-	B	A	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Synchro Reports

Option E

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
AM (Option E)

Intersection												
Int Delay, s/veh	0.9											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	37	0	0	0	3	450	47	83	283	4
Future Vol, veh/h	0	0	37	0	0	0	3	450	47	83	283	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	78	78	78	92	45	92	92	43	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	45	0	0	0	3	1000	51	90	658	4
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1872	1897	660	1895	1874	1026	662	0	0	1051	0	0
Stage 1	840	840	-	1032	1032	-	-	-	-	-	-	-
Stage 2	1032	1057	-	863	842	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	55	69	463	53	72	285	927	-	-	662	-	-
Stage 1	360	381	-	281	310	-	-	-	-	-	-	-
Stage 2	281	302	-	349	380	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	49	59	463	43	62	285	927	-	-	662	-	-
Mov Cap-2 Maneuver	49	59	-	43	62	-	-	-	-	-	-	-
Stage 1	357	329	-	279	308	-	-	-	-	-	-	-
Stage 2	279	300	-	273	328	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	13.6		0		0		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	927	-	-	463	-	662	-	-				
HCM Lane V/C Ratio	0.004	-	-	0.096	-	0.136	-	-				
HCM Control Delay (s)	8.9	0	-	13.6	0	11.3	-	-				
HCM Lane LOS	A	A	-	B	A	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.3	-	0.5	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
AM (Option E)

Intersection												
Int Delay, s/veh	1.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	25	1	0	33	1	434	24	42	233	3
Future Vol, veh/h	0	0	25	1	0	33	1	434	24	42	233	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	92	45	92	87	43	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	32	1	0	42	1	964	26	48	542	3
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1640	1632	544	1635	1620	977	545	0	0	990	0	0
Stage 1	640	640	-	979	979	-	-	-	-	-	-	-
Stage 2	1000	992	-	656	641	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	80	101	539	81	103	304	1024	-	-	698	-	-
Stage 1	464	470	-	301	328	-	-	-	-	-	-	-
Stage 2	293	324	-	454	469	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	65	94	539	72	96	304	1024	-	-	698	-	-
Mov Cap-2 Maneuver	65	94	-	72	96	-	-	-	-	-	-	-
Stage 1	464	438	-	301	328	-	-	-	-	-	-	-
Stage 2	252	324	-	398	437	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	12.1		20.3		0		0.9					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1024	-	-	539	278	698	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.059	0.157	0.069	-	-				
HCM Control Delay (s)	8.5	-	-	12.1	20.3	10.5	-	-				
HCM Lane LOS	A	-	-	B	C	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.2	0.5	0.2	-	-				

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
School PM (Option E)

Intersection												
Int Delay, s/veh	1.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	18	2	0	69	7	353	0	0	179	8
Future Vol, veh/h	0	0	18	2	0	69	7	353	0	0	179	8
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	92	47	92	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	23	2	0	83	8	751	0	0	426	9
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1240	1198	431	1209	1202	751	435	0	0	751	0	0
Stage 1	431	431	-	767	767	-	-	-	-	-	-	-
Stage 2	809	767	-	442	435	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	152	186	624	160	185	411	1125	-	-	858	-	-
Stage 1	603	583	-	395	411	-	-	-	-	-	-	-
Stage 2	374	411	-	594	580	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	120	184	624	153	183	411	1125	-	-	858	-	-
Mov Cap-2 Maneuver	120	184	-	153	183	-	-	-	-	-	-	-
Stage 1	596	583	-	390	406	-	-	-	-	-	-	-
Stage 2	295	406	-	572	580	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11		16.7		0.1		0					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1125	-	-	624	392	858	-	-				
HCM Lane V/C Ratio	0.007	-	-	0.037	0.218	-	-	-				
HCM Control Delay (s)	8.2	0	-	11	16.7	0	-	-				
HCM Lane LOS	A	A	-	B	C	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.8	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
School PM (Option E)

Intersection												
Int Delay, s/veh	0.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	11	1	0	24	1	337	9	26	178	4
Future Vol, veh/h	0	0	11	1	0	24	1	337	9	26	178	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	14	1	0	31	1	717	10	30	424	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1227	1216	427	1218	1213	722	429	0	0	727	0	0
Stage 1	487	487	-	724	724	-	-	-	-	-	-	-
Stage 2	740	729	-	494	489	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	155	181	628	157	182	427	1130	-	-	876	-	-
Stage 1	562	550	-	417	430	-	-	-	-	-	-	-
Stage 2	409	428	-	557	549	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	140	175	628	149	176	427	1130	-	-	876	-	-
Mov Cap-2 Maneuver	140	175	-	149	176	-	-	-	-	-	-	-
Stage 1	561	531	-	417	430	-	-	-	-	-	-	-
Stage 2	379	428	-	526	530	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.9		14.9		0		0.6					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1130	-	-	628	397	876	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.022	0.081	0.034	-	-				
HCM Control Delay (s)	8.2	-	-	10.9	14.9	9.3	-	-				
HCM Lane LOS	A	-	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

HCM 6th TWSC
7: Jane Lundeen Dr & Middle Access

2045 BG + Site
PM (Option E)

Intersection												
Int Delay, s/veh	1.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔		↗	↘	
Traffic Vol, veh/h	9	0	11	1	0	28	9	217	6	8	111	11
Future Vol, veh/h	9	0	11	1	0	28	9	217	6	8	111	11
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	60	87	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	12	0	14	1	0	36	10	362	7	10	236	13
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	667	652	243	656	655	366	249	0	0	369	0	0
Stage 1	263	263	-	386	386	-	-	-	-	-	-	-
Stage 2	404	389	-	270	269	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	372	387	796	379	386	679	1317	-	-	1190	-	-
Stage 1	742	691	-	637	610	-	-	-	-	-	-	-
Stage 2	623	608	-	736	687	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	347	380	796	367	379	679	1317	-	-	1190	-	-
Mov Cap-2 Maneuver	347	380	-	367	379	-	-	-	-	-	-	-
Stage 1	735	685	-	631	604	-	-	-	-	-	-	-
Stage 2	584	602	-	717	682	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	12.5		10.8		0.2		0.3					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1317	-	-	503	660	1190	-	-				
HCM Lane V/C Ratio	0.008	-	-	0.051	0.056	0.008	-	-				
HCM Control Delay (s)	7.8	0	-	12.5	10.8	8.1	-	-				
HCM Lane LOS	A	A	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.2	0.2	0	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
PM (Option E)

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Future Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	0	9	2	0	64	1	202	27	31	140	6
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	455	436	143	428	426	216	146	0	0	229	0	0
Stage 1	205	205	-	218	218	-	-	-	-	-	-	-
Stage 2	250	231	-	210	208	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	515	514	905	537	520	824	1436	-	-	1339	-	-
Stage 1	797	732	-	784	723	-	-	-	-	-	-	-
Stage 2	754	713	-	792	730	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	467	502	905	522	508	824	1436	-	-	1339	-	-
Mov Cap-2 Maneuver	467	502	-	522	508	-	-	-	-	-	-	-
Stage 1	796	715	-	783	722	-	-	-	-	-	-	-
Stage 2	695	712	-	766	713	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.7		9.9		0		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1436	-	-	651	807	1339	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.024	0.082	0.023	-	-				
HCM Control Delay (s)	7.5	-	-	10.7	9.9	7.8	-	-				
HCM Lane LOS	A	-	-	B	A	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Synchro Reports

Option F

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
AM (Option F)

Intersection												
Int Delay, s/veh	1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↱	↰		↱	↰	
Traffic Vol, veh/h	0	0	15	1	0	33	1	409	24	42	217	3
Future Vol, veh/h	0	0	15	1	0	33	1	409	24	42	217	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	92	45	92	87	43	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	19	1	0	42	1	909	26	48	505	3
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1548	1540	507	1536	1528	922	508	0	0	935	0	0
Stage 1	603	603	-	924	924	-	-	-	-	-	-	-
Stage 2	945	937	-	612	604	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	93	115	566	95	117	327	1057	-	-	732	-	-
Stage 1	486	488	-	323	348	-	-	-	-	-	-	-
Stage 2	314	343	-	480	488	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	77	107	566	87	109	327	1057	-	-	732	-	-
Mov Cap-2 Maneuver	77	107	-	87	109	-	-	-	-	-	-	-
Stage 1	486	456	-	323	348	-	-	-	-	-	-	-
Stage 2	273	343	-	433	456	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	11.6		18.9		0		0.9					
HCM LOS	B		C									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1057	-	-	566	302	732	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.034	0.144	0.066	-	-				
HCM Control Delay (s)	8.4	-	-	11.6	18.9	10.3	-	-				
HCM Lane LOS	A	-	-	B	C	B	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.5	0.2	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
School PM (Option F)

Intersection												
Int Delay, s/veh	0.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	7	1	0	24	1	323	9	26	169	4
Future Vol, veh/h	0	0	7	1	0	24	1	323	9	26	169	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	78	78	78	87	47	87	87	42	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	9	1	0	31	1	687	10	30	402	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	1175	1164	405	1163	1161	692	407	0	0	697	0	0
Stage 1	465	465	-	694	694	-	-	-	-	-	-	-
Stage 2	710	699	-	469	467	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	168	194	646	172	195	444	1152	-	-	899	-	-
Stage 1	578	563	-	433	444	-	-	-	-	-	-	-
Stage 2	424	442	-	575	562	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	152	187	646	165	188	444	1152	-	-	899	-	-
Mov Cap-2 Maneuver	152	187	-	165	188	-	-	-	-	-	-	-
Stage 1	577	544	-	433	444	-	-	-	-	-	-	-
Stage 2	394	442	-	548	543	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.7		14.4		0		0.6					
HCM LOS	B		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR				
Capacity (veh/h)	1152	-	-	646	416	899	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.014	0.077	0.033	-	-				
HCM Control Delay (s)	8.1	-	-	10.7	14.4	9.1	-	-				
HCM Lane LOS	A	-	-	B	B	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0	0.2	0.1	-	-				

HCM 6th TWSC
8: Jane Lundeen Dr & South Access

2045 BG + Site
PM (Option F)

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Future Vol, veh/h	5	0	7	2	0	53	1	121	22	26	66	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	155	-	-	155	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	78	78	78	83	83	83	83	60	83	83	47	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	0	9	2	0	64	1	202	27	31	140	6
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	455	436	143	428	426	216	146	0	0	229	0	0
Stage 1	205	205	-	218	218	-	-	-	-	-	-	-
Stage 2	250	231	-	210	208	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	515	514	905	537	520	824	1436	-	-	1339	-	-
Stage 1	797	732	-	784	723	-	-	-	-	-	-	-
Stage 2	754	713	-	792	730	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	467	502	905	522	508	824	1436	-	-	1339	-	-
Mov Cap-2 Maneuver	467	502	-	522	508	-	-	-	-	-	-	-
Stage 1	796	715	-	783	722	-	-	-	-	-	-	-
Stage 2	695	712	-	766	713	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	10.7		9.9		0		1.4					
HCM LOS	B		A									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1WBLn1	SBL	SBT	SBR					
Capacity (veh/h)	1436	-	-	651	807	1339	-	-				
HCM Lane V/C Ratio	0.001	-	-	0.024	0.082	0.023	-	-				
HCM Control Delay (s)	7.5	-	-	10.7	9.9	7.8	-	-				
HCM Lane LOS	A	-	-	B	A	A	-	-				
HCM 95th %tile Q(veh)	0	-	-	0.1	0.3	0.1	-	-				

Sidra Level of Service Reports



Sidra Reports

Jane Lundeen + Walker

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2025 Existing AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

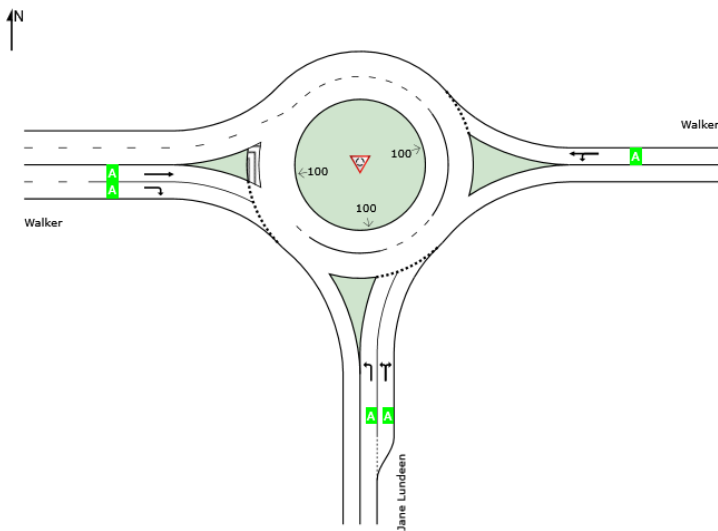

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [2025 Existing AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	146	3.0	146	3.0	1229	0.119	100	3.9	LOS A	0.5	12.2	Full	1600	0.0	0.0
Lane 2 ^d	154	3.0	154	3.0	1295	0.119	100	3.7	LOS A	0.5	11.9	Short	235	0.0	NA
Approach	300	3.0	300	3.0		0.119		3.8	LOS A	0.5	12.2				
East: Walker															
Lane 1 ^d	141	3.0	141	3.0	1052	0.134	100	4.6	LOS A	0.5	12.9	Full	1600	0.0	0.0
Approach	141	3.0	141	3.0		0.134		4.6	LOS A	0.5	12.9				
West: Walker															
Lane 1	69	3.0	69	3.0	1362	0.051	100	2.9	LOS A	0.2	5.1	Full	1600	0.0	0.0
Lane 2 ^d	201	3.0	201	3.0	1362	0.148	100	3.6	LOS A	0.6	16.5	Full	1600	0.0	0.0
Approach	270	3.0	270	3.0		0.148		3.4	LOS A	0.6	16.5				
All Vehicles	711	3.0	711	3.0		0.148		3.8	LOS A	0.6	16.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	146	-	146	3.0	1229	0.119	100	NA	NA
Lane 2	148	5	154	3.0	1295	0.119	100	0.0	1
Approach	295	5	300	3.0		0.119			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	13	128	141	3.0	1052	0.134	100	NA	NA
Approach	13	128	141	3.0		0.134			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	69	-	69	3.0	1362	0.051	100	NA	NA
Lane 2	-	201	201	3.0	1362	0.148	100	NA	NA
Approach	69	201	270	3.0		0.148			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	711	3.0		0.148					

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued	Residual Queued	Time for Residual	Duration of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2025 Existing School PM (Site Folder: General)]**


Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

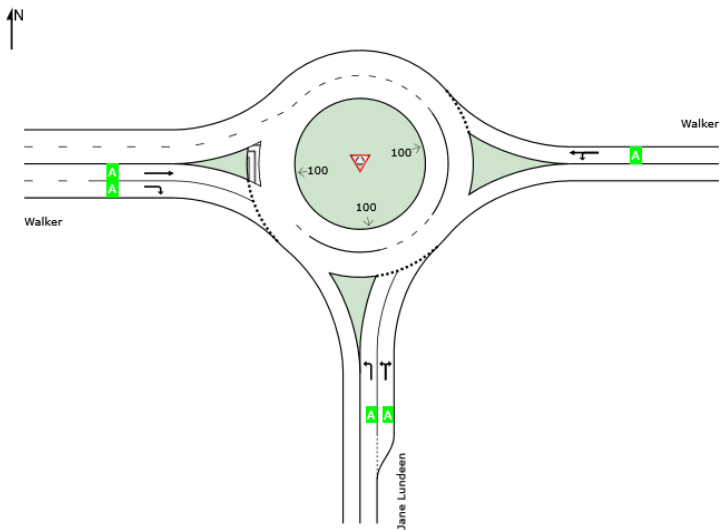

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Thursday, November 20, 2025 3:49:50 PM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\Walker + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2025 Existing School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	134	3.0	134	3.0	1122	0.119	100	4.2	LOS A	0.5	12.0	Full	1600	0.0	0.0
Lane 2 ^d	142	3.0	142	3.0	1189	0.119	100	4.0	LOS A	0.5	11.7	Short	235	0.0	NA
Approach	276	3.0	276	3.0		0.119		4.1	LOS A	0.5	12.0				
East: Walker															
Lane 1 ^d	143	3.0	143	3.0	1082	0.132	100	4.5	LOS A	0.5	12.8	Full	1600	0.0	0.0
Approach	143	3.0	143	3.0		0.132		4.5	LOS A	0.5	12.8				
West: Walker															
Lane 1 ^d	162	3.0	162	3.0	1375	0.118	100	3.3	LOS A	0.5	12.8	Full	1600	0.0	0.0
Lane 2	133	3.0	133	3.0	1375	0.096	100	3.1	LOS A	0.4	10.2	Full	1600	0.0	0.0
Approach	295	3.0	295	3.0		0.118		3.2	LOS A	0.5	12.8				
All Vehicles	714	3.0	714	3.0		0.132		3.8	LOS A	0.5	12.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.
From S To Exit:	W	E							
Lane 1	134	-	134	3.0	1122	0.119	100	NA	NA
Lane 2	130	12	142	3.0	1189	0.119	100	0.0	1
Approach	264	12	276	3.0		0.119			
East: Walker									
Mov.	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.
From E To Exit:	S	W							
Lane 1	4	140	143	3.0	1082	0.132	100	NA	NA
Approach	4	140	143	3.0		0.132			
West: Walker									
Mov.	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.
From W To Exit:	E	S							
Lane 1	162	-	162	3.0	1375	0.118	100	NA	NA
Lane 2	-	133	133	3.0	1375	0.096	100	NA	NA
Approach	162	133	295	3.0		0.118			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	714	3.0	0.132						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	Critical Gap pcu/h	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec	
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued	Residual Queued	Time for Residual	Duration of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2025 Existing PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

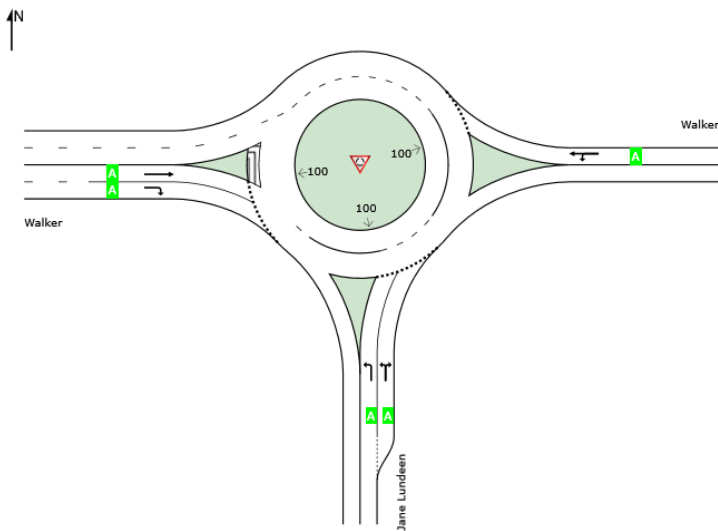

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [2025 Existing PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	42	3.0	42	3.0	1185	0.035	100	3.3	LOS A	0.1	3.3	Full	1600	0.0	0.0
Lane 2 ^d	44	3.0	44	3.0	1252	0.035	100	3.1	LOS A	0.1	3.2	Short	235	0.0	NA
Approach	86	3.0	86	3.0		0.035		3.2	LOS A	0.1	3.3				
East: Walker															
Lane 1 ^d	98	3.0	98	3.0	1277	0.076	100	3.4	LOS A	0.3	7.3	Full	1600	0.0	0.0
Approach	98	3.0	98	3.0		0.076		3.4	LOS A	0.3	7.3				
West: Walker															
Lane 1 ^d	106	3.0	106	3.0	1378	0.077	100	3.0	LOS A	0.3	8.0	Full	1600	0.0	0.0
Lane 2	43	3.0	43	3.0	1378	0.031	100	2.8	LOS A	0.1	3.1	Full	1600	0.0	0.0
Approach	149	3.0	149	3.0		0.077		2.9	LOS A	0.3	8.0				
All Vehicles	333	3.0	333	3.0		0.077		3.1	LOS A	0.3	8.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	42	-	42	3.0	1185	0.035	100	NA	NA
Lane 2	43	1	44	3.0	1252	0.035	100	0.0	1
Approach	84	1	86	3.0		0.035			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	1	96	98	3.0	1277	0.076	100	NA	NA
Approach	1	96	98	3.0		0.076			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	106	-	106	3.0	1378	0.077	100	NA	NA
Lane 2	-	43	43	3.0	1378	0.031	100	NA	NA
Approach	106	43	149	3.0		0.077			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	333	3.0	0.077						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued	Residual Queued	Time for Residual	Duration of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 Site: 101 [ST Baseline PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

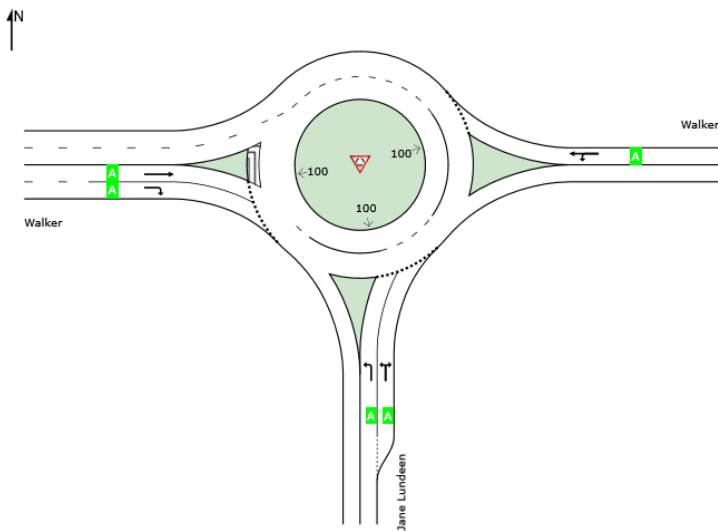

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [ST Baseline PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	42	3.0	42	3.0	1149	0.036	100	3.4	LOSA	0.1	3.4	Full	1600	0.0	0.0
Lane 2 ^d	44	3.0	44	3.0	1216	0.036	100	3.2	LOSA	0.1	3.3	Short	235	0.0	NA
Approach	86	3.0	86	3.0		0.036		3.3	LOSA	0.1	3.4				
East: Walker															
Lane 1 ^d	98	3.0	98	3.0	1277	0.076	100	3.4	LOSA	0.3	7.3	Full	1600	0.0	0.0
Approach	98	3.0	98	3.0		0.076		3.4	LOSA	0.3	7.3				
West: Walker															
Lane 1 ^d	137	3.0	137	3.0	1378	0.100	100	3.1	LOSA	0.4	10.6	Full	1600	0.0	0.0
Lane 2	43	3.0	43	3.0	1378	0.031	100	2.8	LOSA	0.1	3.1	Full	1600	0.0	0.0
Approach	181	3.0	181	3.0		0.100		3.0	LOSA	0.4	10.6				
All Vehicles	364	3.0	364	3.0		0.100		3.2	LOSA	0.4	10.6				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	42	-	42	3.0	1149	0.036	100	NA	NA
Lane 2	43	1	44	3.0	1216	0.036	100	0.0	1
Approach	84	1	86	3.0		0.036			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	1	96	98	3.0	1277	0.076	100	NA	NA
Approach	1	96	98	3.0		0.076			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	137	-	137	3.0	1378	0.100	100	NA	NA
Lane 2	-	43	43	3.0	1378	0.031	100	NA	NA
Approach	137	43	181	3.0		0.100			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	364	3.0		0.100					

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [ST Baseline School PM (Site Folder: General)]**

Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

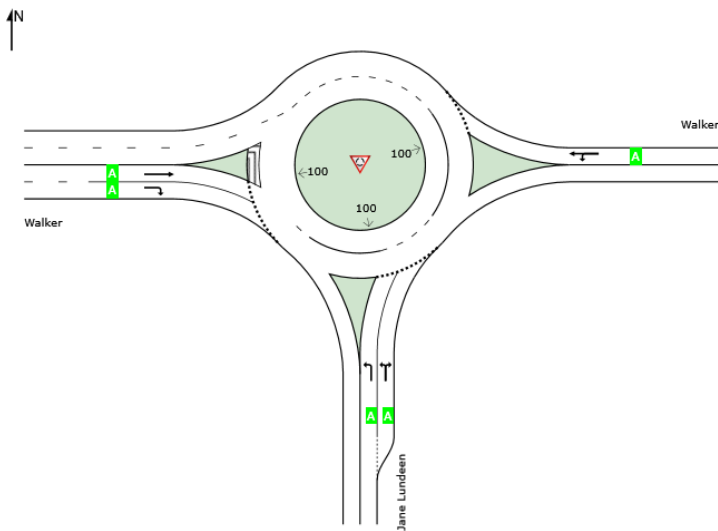

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [ST Baseline School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: Jane Lundeen															
Lane 1	139	3.0	139	3.0	1121	0.124	100	4.3	LOS A	0.5	12.5	Full	1600	0.0	0.0
Lane 2 ^d	147	3.0	147	3.0	1188	0.124	100	4.1	LOS A	0.5	12.2	Short	235	0.0	NA
Approach	286	3.0	286	3.0		0.124		4.2	LOS A	0.5	12.5				
East: Walker															
Lane 1 ^d	152	3.0	152	3.0	1073	0.142	100	4.6	LOS A	0.5	13.8	Full	1600	0.0	0.0
Approach	152	3.0	152	3.0		0.142		4.6	LOS A	0.5	13.8				
West: Walker															
Lane 1 ^d	163	3.0	163	3.0	1375	0.119	100	3.3	LOS A	0.5	12.9	Full	1600	0.0	0.0
Lane 2	115	3.0	115	3.0	1375	0.084	100	3.1	LOS A	0.3	8.8	Full	1600	0.0	0.0
Approach	278	3.0	278	3.0		0.119		3.2	LOS A	0.5	12.9				
All Vehicles	716	3.0	716	3.0		0.142		3.9	LOS A	0.5	13.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	139	-	139	3.0	1121	0.124	100	NA	NA
Lane 2	135	12	147	3.0	1188	0.124	100	0.0	1
Approach	274	12	286	3.0		0.124			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	4	148	152	3.0	1073	0.142	100	NA	NA
Approach	4	148	152	3.0		0.142			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	163	-	163	3.0	1375	0.119	100	NA	NA
Lane 2	-	115	115	3.0	1375	0.084	100	NA	NA
Approach	163	115	278	3.0		0.119			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	716	3.0		0.142					

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [ST Baseline AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

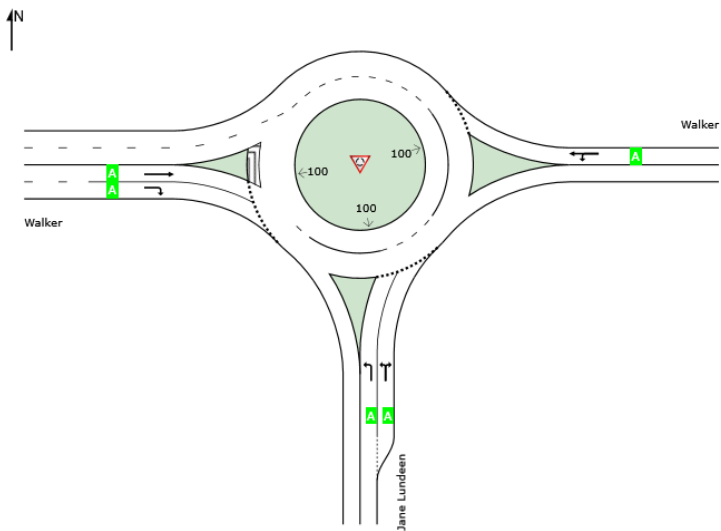

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [ST Baseline AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	158	3.0	158	3.0	1234	0.128	100	3.9	LOS A	0.5	13.4	Full	1600	0.0	0.0
Lane 2 ^d	167	3.0	167	3.0	1300	0.128	100	3.8	LOS A	0.5	13.0	Short	235	0.0	NA
Approach	325	3.0	325	3.0		0.128		3.8	LOS A	0.5	13.4				
East: Walker															
Lane 1 ^d	167	3.0	167	3.0	1029	0.163	100	5.0	LOS A	0.6	15.9	Full	1600	0.0	0.0
Approach	167	3.0	167	3.0		0.163		5.0	LOS A	0.6	15.9				
West: Walker															
Lane 1	65	3.0	65	3.0	1362	0.048	100	2.9	LOS A	0.2	4.8	Full	1600	0.0	0.0
Lane 2 ^d	198	3.0	198	3.0	1362	0.145	100	3.6	LOS A	0.6	16.2	Full	1600	0.0	0.0
Approach	263	3.0	263	3.0		0.145		3.4	LOS A	0.6	16.2				
All Vehicles	756	3.0	756	3.0		0.163		3.9	LOS A	0.6	16.2				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

South: Jane Lundeen

Mov. From S To Exit:	L2 W	R2 E	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.
Lane 1	158	-	158	3.0	1234	0.128	100	NA	NA
Lane 2	160	7	167	3.0	1300	0.128	100	0.0	1
Approach	318	7	325	3.0		0.128			

East: Walker

Mov. From E To Exit:	L2 S	T1 W	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.
Lane 1	13	154	167	3.0	1029	0.163	100	NA	NA
Approach	13	154	167	3.0		0.163			

West: Walker

Mov. From W To Exit:	T1 E	R2 S	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.
Lane 1	65	-	65	3.0	1362	0.048	100	NA	NA
Lane 2	-	198	198	3.0	1362	0.145	100	NA	NA
Approach	65	198	263	3.0		0.145			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	756	3.0	0.163

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis

Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
------------------------	-------------------------------	---------------------------------	--------------------------------------	------------------------	-----------------------------	-------------------------------	-------------------	---------------------	----------------------	-----------------------

There are no Exit Short Lanes for Merge Analysis at this Site.

Variable Demand Analysis

Initial Queued	Residual Queued	Time for Residual	Duration of
-------------------	--------------------	----------------------	----------------

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [ST Baseline + Site AM (Site Folder: General)]**

Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

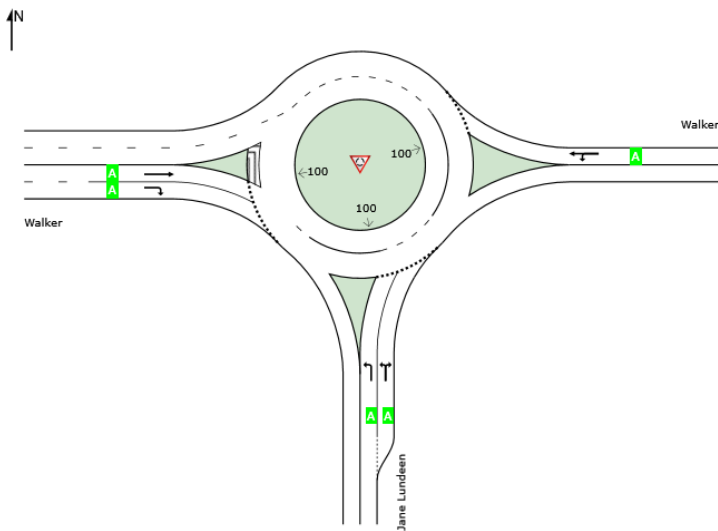

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [ST Baseline + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	195	3.0	195	3.0	1234	0.158	100	4.2	LOS A	0.7	17.0	Full	1600	0.0	0.0
Lane 2 ^d	205	3.0	205	3.0	1300	0.158	100	4.0	LOS A	0.6	16.5	Short	235	0.0	NA
Approach	400	3.0	400	3.0		0.158		4.1	LOS A	0.7	17.0				
East: Walker															
Lane 1 ^d	167	3.0	167	3.0	967	0.173	100	5.3	LOS A	0.7	16.8	Full	1600	0.0	0.0
Approach	167	3.0	167	3.0		0.173		5.3	LOS A	0.7	16.8				
West: Walker															
Lane 1	65	3.0	65	3.0	1362	0.048	100	2.9	LOS A	0.2	4.8	Full	1600	0.0	0.0
Lane 2 ^d	210	3.0	210	3.0	1362	0.154	100	3.6	LOS A	0.7	17.4	Full	1600	0.0	0.0
Approach	275	3.0	275	3.0		0.154		3.5	LOS A	0.7	17.4				
All Vehicles	842	3.0	842	3.0		0.173		4.1	LOS A	0.7	17.4				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	195	-	195	3.0	1234	0.158	100	NA	NA
Lane 2	191	14	205	3.0	1300	0.158	100	0.0	1
Approach	386	14	400	3.0		0.158			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	13	154	167	3.0	967	0.173	100	NA	NA
Approach	13	154	167	3.0		0.173			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	65	-	65	3.0	1362	0.048	100	NA	NA
Lane 2	-	210	210	3.0	1362	0.154	100	NA	NA
Approach	65	210	275	3.0		0.154			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	842	3.0		0.173					

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	Critical Gap pcu/h	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec	
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued	Residual Queued	Time for Residual	Duration of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [ST Baseline + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

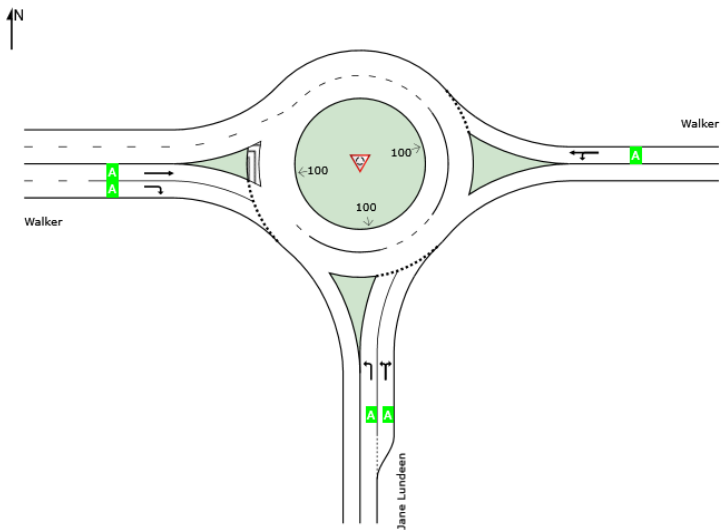

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 8:50:58 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 **Site: 101 [ST Baseline + Site School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: Jane Lundeen															
Lane 1	158	3.0	158	3.0	1121	0.141	100	4.4	LOS A	0.6	14.5	Full	1600	0.0	0.0
Lane 2 ^d	167	3.0	167	3.0	1188	0.141	100	4.2	LOS A	0.5	14.1	Short	235	0.0	NA
Approach	325	3.0	325	3.0		0.141		4.3	LOS A	0.6	14.5				
East: Walker															
Lane 1 ^d	152	3.0	152	3.0	1039	0.146	100	4.8	LOS A	0.6	14.2	Full	1600	0.0	0.0
Approach	152	3.0	152	3.0		0.146		4.8	LOS A	0.6	14.2				
West: Walker															
Lane 1 ^d	163	3.0	163	3.0	1375	0.119	100	3.3	LOS A	0.5	12.9	Full	1600	0.0	0.0
Lane 2	139	3.0	139	3.0	1375	0.101	100	3.2	LOS A	0.4	10.8	Full	1600	0.0	0.0
Approach	302	3.0	302	3.0		0.119		3.2	LOS A	0.5	12.9				
All Vehicles	779	3.0	779	3.0		0.146		4.0	LOS A	0.6	14.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	158	-	158	3.0	1121	0.141	100	NA	NA
Lane 2	151	16	167	3.0	1188	0.141	100	0.0	1
Approach	309	16	325	3.0		0.141			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	4	148	152	3.0	1039	0.146	100	NA	NA
Approach	4	148	152	3.0		0.146			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	163	-	163	3.0	1375	0.119	100	NA	NA
Lane 2	-	139	139	3.0	1375	0.101	100	NA	NA
Approach	163	139	302	3.0		0.119			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	779	3.0		0.146					

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					
		ft	%	veh/h	pcu/h	sec	veh/h	veh/h	v/c	sec	sec	
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [ST Baseline + Site PM (Site Folder: General)]**

Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	South	East	West	
LOS	A	A	A	A

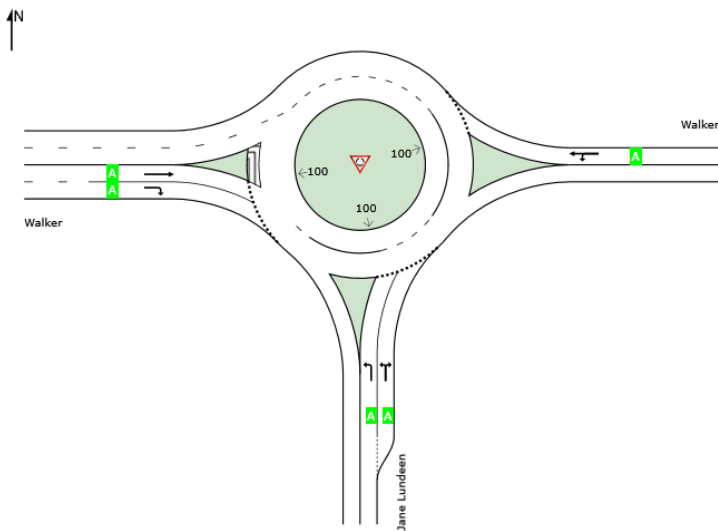

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [ST Baseline + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	42	3.0	42	3.0	1149	0.036	100	3.4	LOS A	0.1	3.4	Full	1600	0.0	0.0
Lane 2 ^d	44	3.0	44	3.0	1216	0.036	100	3.2	LOS A	0.1	3.3	Short	235	0.0	NA
Approach	86	3.0	86	3.0		0.036		3.3	LOS A	0.1	3.4				
East: Walker															
Lane 1 ^d	98	3.0	98	3.0	1277	0.076	100	3.4	LOS A	0.3	7.3	Full	1600	0.0	0.0
Approach	98	3.0	98	3.0		0.076		3.4	LOS A	0.3	7.3				
West: Walker															
Lane 1 ^d	137	3.0	137	3.0	1378	0.100	100	3.1	LOS A	0.4	10.6	Full	1600	0.0	0.0
Lane 2	43	3.0	43	3.0	1378	0.031	100	2.8	LOS A	0.1	3.1	Full	1600	0.0	0.0
Approach	181	3.0	181	3.0		0.100		3.0	LOS A	0.4	10.6				
All Vehicles	364	3.0	364	3.0		0.100		3.2	LOS A	0.4	10.6				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)									
South: Jane Lundeen									
Mov.	L2	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	E			veh/h	v/c	%	%	No.
Lane 1	42	-	42	3.0	1149	0.036	100	NA	NA
Lane 2	43	1	44	3.0	1216	0.036	100	0.0	1
Approach	84	1	86	3.0		0.036			
East: Walker									
Mov.	L2	T1	Total	%HV		Deg.	Lane	Prob.	Ov.
From E					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W			veh/h	v/c	%	%	No.
Lane 1	1	96	98	3.0	1277	0.076	100	NA	NA
Approach	1	96	98	3.0		0.076			
West: Walker									
Mov.	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W					Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S			veh/h	v/c	%	%	No.
Lane 1	137	-	137	3.0	1378	0.100	100	NA	NA
Lane 2	-	43	43	3.0	1378	0.031	100	NA	NA
Approach	137	43	181	3.0		0.100			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	364	3.0	0.100						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	Critical Gap pcu/h	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec	
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued	Residual Queued	Time for Residual	Duration of

	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

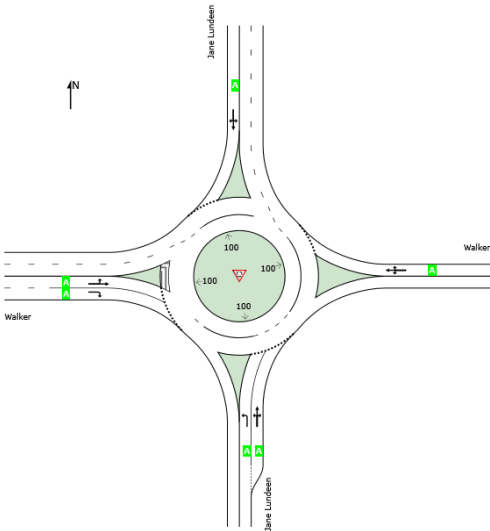

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 8:53:42 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 Site: 101 [2045 BG AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	176	3.0	176	3.0	1122	0.157	100	4.6	LOS A	0.6	16.4	Full	1600	0.0	0.0
Lane 2 ^d	187	3.0	187	3.0	1189	0.157	100	4.3	LOS A	0.6	16.0	Short	235	0.0	NA
Approach	363	3.0	363	3.0		0.157		4.4	LOS A	0.6	16.4				
East: Walker															
Lane 1 ^d	261	3.0	261	3.0	942	0.277	100	6.6	LOS A	1.1	29.1	Full	1600	0.0	0.0
Approach	261	3.0	261	3.0		0.277		6.6	LOS A	1.1	29.1				
North: Jane Lundeen															
Lane 1 ^d	210	3.0	210	3.0	784	0.268	100	7.6	LOS A	1.0	26.1	Full	1600	0.0	0.0
Approach	210	3.0	210	3.0		0.268		7.6	LOS A	1.0	26.1				
West: Walker															
Lane 1	152	3.0	152	3.0	1221	0.125	100	4.0	LOS A	0.5	13.2	Full	1600	0.0	0.0
Lane 2 ^d	333	3.0	333	3.0	1221	0.272	100	5.3	LOS A	1.3	33.8	Full	1600	0.0	0.0
Approach	485	3.0	485	3.0		0.272		4.9	LOS A	1.3	33.8				
All Vehicles	1319	3.0	1319	3.0		0.277		5.5	LOS A	1.3	33.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From S						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E				v/c	%	%	No.
Lane 1	176	-	-	176	3.0	1122	0.157	100	NA	NA
Lane 2	175	1	11	187	3.0	1189	0.157	100	0.0	1
Approach	351	1	11	363	3.0		0.157			
East: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From E						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N				v/c	%	%	No.
Lane 1	16	245	1	261	3.0	942	0.277	100	NA	NA
Approach	16	245	1	261	3.0		0.277			
North: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From N						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W				v/c	%	%	No.
Lane 1	10	100	100	210	3.0	784	0.268	100	NA	NA
Approach	10	100	100	210	3.0		0.268			
West: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From W						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S				v/c	%	%	No.
Lane 1	62	90	-	152	3.0	1221	0.125	100	NA	NA
Lane 2	-	-	333	333	3.0	1221	0.272	100	NA	NA
Approach	62	90	333	485	3.0		0.272			
Total										
All Vehicles										
	1319	3.0		0.277						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

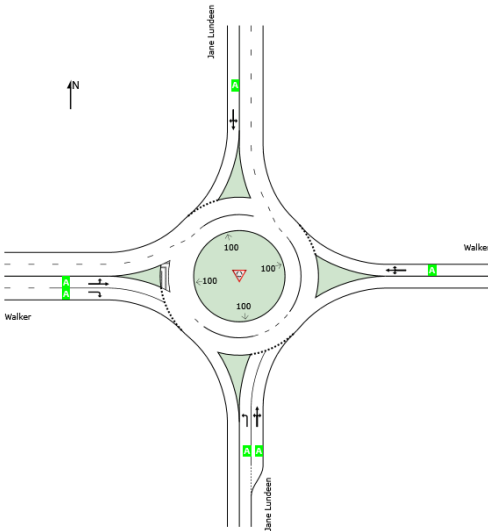

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 8:54:58 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 Site: 101 [2045 BG School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	189	3.0	189	3.0	847	0.223	100	6.6	LOS A	0.9	22.7	Full	1600	0.0	0.0
Lane 2 ^d	204	3.0	204	3.0	915	0.223	100	6.2	LOS A	0.9	22.2	Short	235	0.0	NA
Approach	393	3.0	393	3.0		0.223		6.3	LOS A	0.9	22.7				
East: Walker															
Lane 1 ^d	217	3.0	217	3.0	854	0.254	100	6.9	LOS A	1.0	25.2	Full	1600	0.0	0.0
Approach	217	3.0	217	3.0		0.254		6.9	LOS A	1.0	25.2				
North: Jane Lundeen															
Lane 1 ^d	125	3.0	125	3.0	799	0.156	100	6.1	LOS A	0.6	14.2	Full	1600	0.0	0.0
Approach	125	3.0	125	3.0		0.156		6.1	LOS A	0.6	14.2				
West: Walker															
Lane 1 ^d	435	3.0	435	3.0	1357	0.320	100	4.9	LOS A	1.7	44.7	Full	1600	0.0	0.0
Lane 2	163	3.0	163	3.0	1357	0.120	100	3.4	LOS A	0.5	13.0	Full	1600	0.0	0.0
Approach	598	3.0	598	3.0		0.320		4.5	LOS A	1.7	44.7				
All Vehicles	1333	3.0	1333	3.0		0.320		5.6	LOS A	1.7	44.7				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From S						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E				v/c	%	%	No.
Lane 1	189	-	-	189	3.0	847	0.223	100	NA	NA
Lane 2	186	1	17	204	3.0	915	0.223	100	0.0	1
Approach	375	1	17	393	3.0		0.223			
East: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From E						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N				v/c	%	%	No.
Lane 1	5	211	1	217	3.0	854	0.254	100	NA	NA
Approach	5	211	1	217	3.0		0.254			
North: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From N						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W				v/c	%	%	No.
Lane 1	11	1	113	125	3.0	799	0.156	100	NA	NA
Approach	11	1	113	125	3.0		0.156			
West: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From W						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S				v/c	%	%	No.
Lane 1	143	291	-	435	3.0	1357	0.320	100	NA	NA
Lane 2	-	-	163	163	3.0	1357	0.120	100	NA	NA
Approach	143	291	163	598	3.0		0.320			
Total %HV Deg.Satn (v/c)										
All Vehicles	1333	3.0		0.320						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

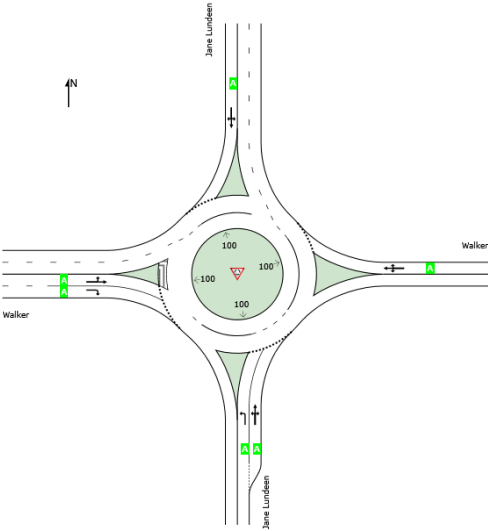

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 8:56:18 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 Site: 101 [2045 BG PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	92	3.0	92	3.0	838	0.110	100	5.4	LOS A	0.4	10.2	Full	1600	0.0	0.0
Lane 2 ^d	99	3.0	99	3.0	905	0.110	100	5.0	LOS A	0.4	10.0	Short	235	0.0	NA
Approach	191	3.0	191	3.0		0.110		5.2	LOS A	0.4	10.2				
East: Walker															
Lane 1 ^d	262	3.0	262	3.0	976	0.269	100	6.3	LOS A	1.1	28.4	Full	1600	0.0	0.0
Approach	262	3.0	262	3.0		0.269		6.3	LOS A	1.1	28.4				
North: Jane Lundeen															
Lane 1 ^d	151	3.0	151	3.0	917	0.165	100	5.5	LOS A	0.6	15.7	Full	1600	0.0	0.0
Approach	151	3.0	151	3.0		0.165		5.5	LOS A	0.6	15.7				
West: Walker															
Lane 1 ^d	444	3.0	444	3.0	1353	0.328	100	5.1	LOS A	1.8	46.3	Full	1600	0.0	0.0
Lane 2	92	3.0	92	3.0	1353	0.068	100	3.1	LOS A	0.3	6.9	Full	1600	0.0	0.0
Approach	536	3.0	536	3.0		0.328		4.8	LOS A	1.8	46.3				
All Vehicles	1141	3.0	1141	3.0		0.328		5.3	LOS A	1.8	46.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E			veh/h	v/c	%	%	No.
Lane 1	92	-	-	92	3.0	838	0.110	100	NA	NA
Lane 2	92	1	6	99	3.0	905	0.110	100	0.0	1
Approach	184	1	6	191	3.0		0.110			
East: Walker										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From E						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N			veh/h	v/c	%	%	No.
Lane 1	6	253	3	262	3.0	976	0.269	100	NA	NA
Approach	6	253	3	262	3.0		0.269			
North: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From N						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W			veh/h	v/c	%	%	No.
Lane 1	13	1	137	151	3.0	917	0.165	100	NA	NA
Approach	13	1	137	151	3.0		0.165			
West: Walker										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S			veh/h	v/c	%	%	No.
Lane 1	190	254	-	444	3.0	1353	0.328	100	NA	NA
Lane 2	-	-	92	92	3.0	1353	0.068	100	NA	NA
Approach	190	254	92	536	3.0		0.328			
	Total	%HV	Deg.Satn (v/c)							
All Vehicles	1141	3.0	0.328							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	veh/h	Opposing Flow Rate pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

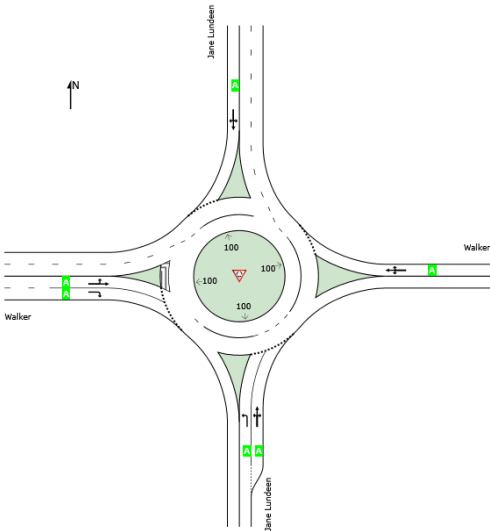

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:01:53 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: Jane Lundeen															
Lane 1	213	3.0	213	3.0	1122	0.190	100	4.9	LOS A	0.8	20.5	Full	1600	0.0	0.0
Lane 2 ^d	225	3.0	225	3.0	1189	0.190	100	4.6	LOS A	0.8	19.9	Short	235	0.0	NA
Approach	438	3.0	438	3.0		0.190		4.8	LOS A	0.8	20.5				
East: Walker															
Lane 1 ^d	261	3.0	261	3.0	885	0.295	100	7.2	LOS A	1.2	30.7	Full	1600	0.0	0.0
Approach	261	3.0	261	3.0		0.295		7.2	LOS A	1.2	30.7				
North: Jane Lundeen															
Lane 1 ^d	111	3.0	111	3.0	736	0.151	100	6.5	LOS A	0.5	13.4	Full	1600	0.0	0.0
Approach	111	3.0	111	3.0		0.151		6.5	LOS A	0.5	13.4				
West: Walker															
Lane 1	152	3.0	152	3.0	1345	0.113	100	3.5	LOS A	0.5	12.1	Full	1600	0.0	0.0
Lane 2 ^d	345	3.0	345	3.0	1345	0.256	100	4.6	LOS A	1.3	32.6	Full	1600	0.0	0.0
Approach	497	3.0	497	3.0		0.256		4.2	LOS A	1.3	32.6				
All Vehicles	1307	3.0	1307	3.0		0.295		5.2	LOS A	1.3	32.6				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From S						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E				v/c	%	%	No.
Lane 1	213	-	-	213	3.0	1122	0.190	100	NA	NA
Lane 2	206	1	18	225	3.0	1189	0.190	100	0.0	1
Approach	418	1	18	438	3.0		0.190			
East: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From E						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N				v/c	%	%	No.
Lane 1	16	245	1	261	3.0	885	0.295	100	NA	NA
Approach	16	245	1	261	3.0		0.295			
North: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From N						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W				v/c	%	%	No.
Lane 1	10	1	100	111	3.0	736	0.151	100	NA	NA
Approach	10	1	100	111	3.0		0.151			
West: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From W						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S				v/c	%	%	No.
Lane 1	62	90	-	152	3.0	1345	0.113	100	NA	NA
Lane 2	-	-	345	345	3.0	1345	0.256	100	NA	NA
Approach	62	90	345	497	3.0		0.256			
Total										
All Vehicles										
	1307	3.0		0.295						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

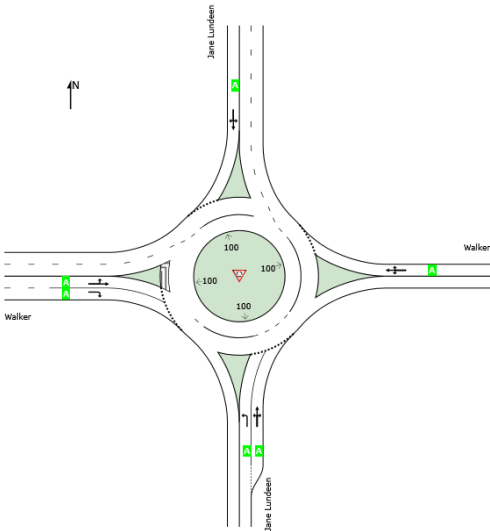

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:03:50 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	208	3.0	208	3.0	847	0.245	100	6.8	LOS A	1.0	25.4	Full	1600	0.0	0.0
Lane 2 ^d	225	3.0	225	3.0	915	0.245	100	6.4	LOS A	1.0	24.8	Short	235	0.0	NA
Approach	433	3.0	433	3.0		0.245		6.6	LOS A	1.0	25.4				
East: Walker															
Lane 1 ^d	217	3.0	217	3.0	827	0.262	100	7.2	LOS A	1.0	25.9	Full	1600	0.0	0.0
Approach	217	3.0	217	3.0		0.262		7.2	LOS A	1.0	25.9				
North: Jane Lundeen															
Lane 1 ^d	125	3.0	125	3.0	774	0.162	100	6.3	LOS A	0.6	14.6	Full	1600	0.0	0.0
Approach	125	3.0	125	3.0		0.162		6.3	LOS A	0.6	14.6				
West: Walker															
Lane 1 ^d	435	3.0	435	3.0	1357	0.320	100	4.9	LOS A	1.7	44.7	Full	1600	0.0	0.0
Lane 2	187	3.0	187	3.0	1357	0.138	100	3.6	LOS A	0.6	15.2	Full	1600	0.0	0.0
Approach	622	3.0	622	3.0		0.320		4.5	LOS A	1.7	44.7				
All Vehicles	1396	3.0	1396	3.0		0.320		5.7	LOS A	1.7	44.7				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From S						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E				v/c	%	%	No.
Lane 1	208	-	-	208	3.0	847	0.245	100	NA	NA
Lane 2	202	1	22	225	3.0	915	0.245	100	0.0	1
Approach	410	1	22	433	3.0		0.245			
East: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From E						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N				v/c	%	%	No.
Lane 1	5	211	1	217	3.0	827	0.262	100	NA	NA
Approach	5	211	1	217	3.0		0.262			
North: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From N						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W				v/c	%	%	No.
Lane 1	11	1	113	125	3.0	774	0.162	100	NA	NA
Approach	11	1	113	125	3.0		0.162			
West: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From W						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S				v/c	%	%	No.
Lane 1	143	291	-	435	3.0	1357	0.320	100	NA	NA
Lane 2	-	-	187	187	3.0	1357	0.138	100	NA	NA
Approach	143	291	187	622	3.0		0.320			
Total										
All Vehicles										
	1396	3.0		0.320						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	veh/h	Opposing Flow Rate pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

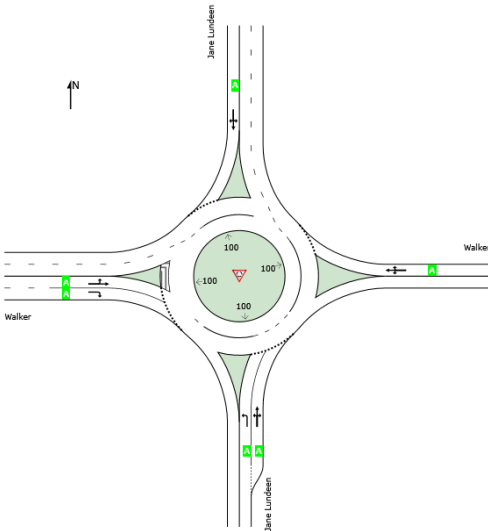

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:04:52 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Walker\Models\Jane Lundeen + Walker.sip9.sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1	114	3.0	114	3.0	838	0.136	100	5.6	LOS A	0.5	12.9	Full	1600	0.0	0.0
Lane 2 ^d	123	3.0	123	3.0	905	0.136	100	5.3	LOS A	0.5	12.6	Short	235	0.0	NA
Approach	237	3.0	237	3.0		0.136		5.4	LOS A	0.5	12.9				
East: Walker															
Lane 1 ^d	262	3.0	262	3.0	940	0.279	100	6.7	LOS A	1.1	29.3	Full	1600	0.0	0.0
Approach	262	3.0	262	3.0		0.279		6.7	LOS A	1.1	29.3				
North: Jane Lundeen															
Lane 1 ^d	150	3.0	150	3.0	883	0.170	100	5.7	LOS A	0.6	16.0	Full	1600	0.0	0.0
Approach	150	3.0	150	3.0		0.170		5.7	LOS A	0.6	16.0				
West: Walker															
Lane 1 ^d	444	3.0	444	3.0	1353	0.328	100	5.1	LOS A	1.8	46.3	Full	1600	0.0	0.0
Lane 2	127	3.0	127	3.0	1353	0.094	100	3.3	LOS A	0.4	9.8	Full	1600	0.0	0.0
Approach	571	3.0	571	3.0		0.328		4.7	LOS A	1.8	46.3				
All Vehicles	1220	3.0	1220	3.0		0.328		5.4	LOS A	1.8	46.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From S						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E				v/c	%	%	No.
Lane 1	114	-	-	114	3.0	838	0.136	100	NA	NA
Lane 2	111	1	11	123	3.0	905	0.136	100	0.0	1
Approach	225	1	11	237	3.0		0.136			
East: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From E						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N				v/c	%	%	No.
Lane 1	6	253	3	262	3.0	940	0.279	100	NA	NA
Approach	6	253	3	262	3.0		0.279			
North: Jane Lundeen										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From N						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W				v/c	%	%	No.
Lane 1	13	1	136	150	3.0	883	0.170	100	NA	NA
Approach	13	1	136	150	3.0		0.170			
West: Walker										
Mov.	L2	T1	R2	Total	%HV	Cap.	Deg.	Lane	Prob.	Ov.
From W						veh/h	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S				v/c	%	%	No.
Lane 1	190	254	-	444	3.0	1353	0.328	100	NA	NA
Lane 2	-	-	127	127	3.0	1353	0.094	100	NA	NA
Approach	190	254	127	571	3.0		0.328			
	Total	%HV	Deg.Satn (v/c)							
All Vehicles	1220	3.0	0.328							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	veh/h	Opposing Flow Rate pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Walker				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

Sidra Reports

Jane Lundeen + Pinehurst

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2025 Existing AM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

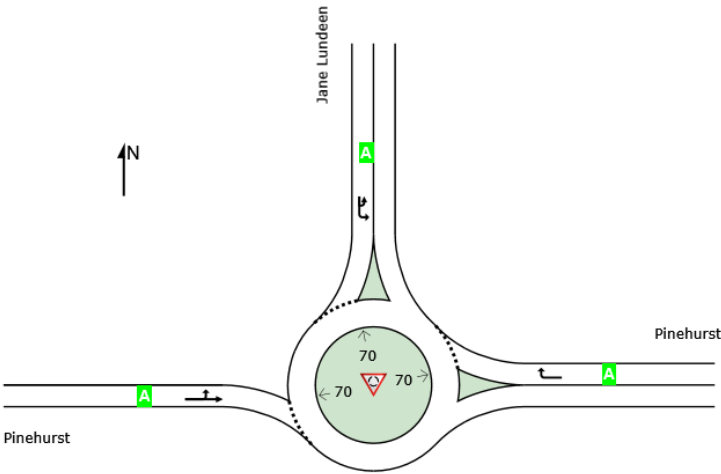

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:46:43 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2025 Existing AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	591	3.0	591	3.0	1338	0.442	100	5.2	LOS A	3.2	82.5	Full	800	0.0	0.0
Approach	591	3.0	591	3.0		0.442		5.2	LOS A	3.2	82.5				
North: Jane Lundeen															
Lane 1 ^d	384	3.0	384	3.0	1343	0.286	100	4.1	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	384	3.0	384	3.0		0.286		4.1	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	295	3.0	295	3.0	886	0.333	100	7.7	LOS A	1.6	41.7	Full	300	0.0	0.0
Approach	295	3.0	295	3.0		0.333		7.7	LOS A	1.6	41.7				
All Vehicles	1271	3.0	1271	3.0		0.442		5.4	LOS A	3.2	82.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	591	591	3.0		1338	0.442	100	NA	NA
Approach	591	591	3.0			0.442			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	383	384	3.0	1343	0.286	100	NA	NA
Approach	1	383	384	3.0		0.286			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	2	293	295	3.0	886	0.333	100	NA	NA
Approach	2	293	295	3.0		0.333			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	1271	3.0	0.442						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE SUMMARY

 Site: 101 [2025 Existing School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	536	3.0	536	3.0	1340	0.400	100	4.8	LOS A	2.7	69.7	Full	800	0.0	0.0
Approach	536	3.0	536	3.0		0.400		4.8	LOS A	2.7	69.7				
North: Jane Lundeen															
Lane 1 ^d	339	3.0	339	3.0	1343	0.253	100	3.9	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	339	3.0	339	3.0		0.253		3.9	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	123	3.0	123	3.0	930	0.132	100	5.1	LOS A	0.6	14.2	Full	300	0.0	0.0
Approach	123	3.0	123	3.0		0.132		5.1	LOS A	0.6	14.2				
All Vehicles	998	3.0	998	3.0		0.400		4.6	LOS A	2.7	69.7				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	536	536	3.0		1340	0.400	100	NA	NA
Approach	536	536	3.0			0.400			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	338	339	3.0	1343	0.253	100	NA	NA
Approach	1	338	339	3.0		0.253			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	121	123	3.0	930	0.132	100	NA	NA
Approach	1	121	123	3.0		0.132			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	998	3.0	0.400						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2025 Existing School PM (Site Folder: General)]**

Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

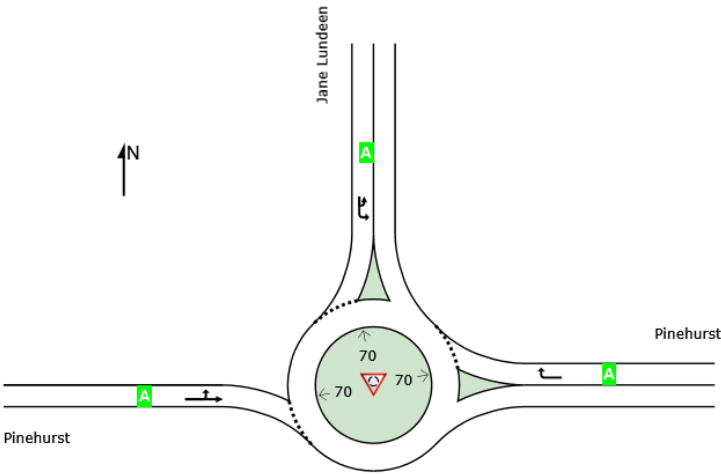

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2025 Existing PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

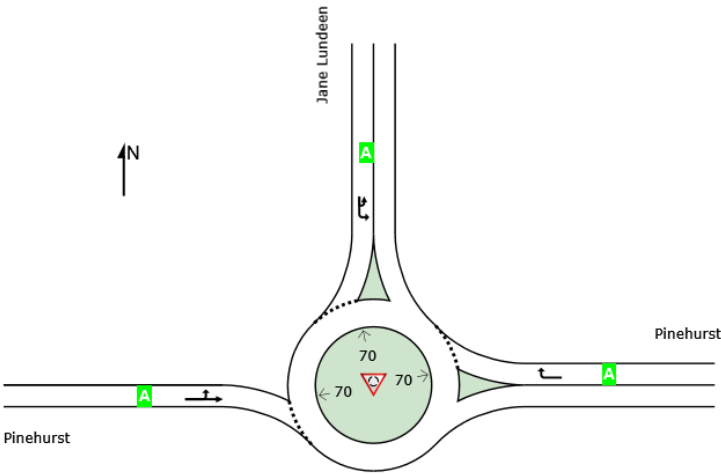

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:50:14 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 Site: 101 [2025 Existing PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	117	3.0	117	3.0	1340	0.087	100	3.1	LOS A	0.4	10.0	Full	800	0.0	0.0
Approach	117	3.0	117	3.0		0.087		3.1	LOS A	0.4	10.0				
North: Jane Lundeen															
Lane 1 ^d	84	3.0	84	3.0	1343	0.063	100	3.0	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	84	3.0	84	3.0		0.063		3.0	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	33	3.0	33	3.0	1226	0.027	100	3.1	LOS A	0.1	2.9	Full	300	0.0	0.0
Approach	33	3.0	33	3.0		0.027		3.1	LOS A	0.1	2.9				
All Vehicles	234	3.0	234	3.0		0.087		3.1	LOS A	0.4	10.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	117	117	3.0		1340	0.087	100	NA	NA
Approach	117	117	3.0			0.087			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	83	84	3.0	1343	0.063	100	NA	NA
Approach	1	83	84	3.0		0.063			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	32	33	3.0	1226	0.027	100	NA	NA
Approach	1	32	33	3.0		0.027			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	234	3.0	0.087						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2026 Baseline AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

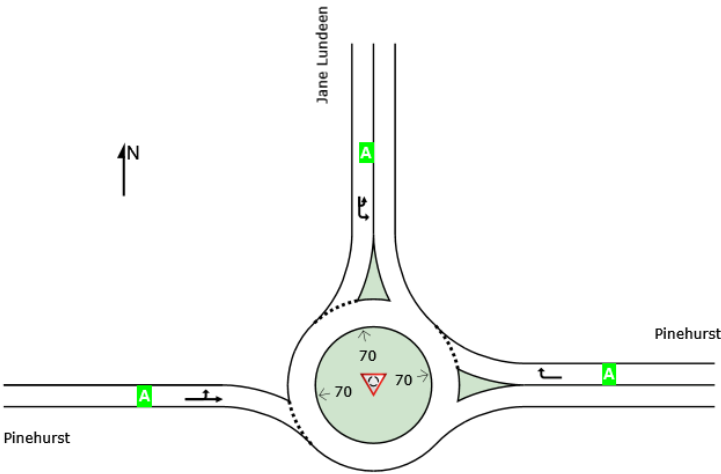

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2026 Baseline AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	611	3.0	611	3.0	1338	0.457	100	5.3	LOS A	3.4	87.6	Full	800	0.0	0.0
Approach	611	3.0	611	3.0		0.457		5.3	LOS A	3.4	87.6				
North: Jane Lundeen															
Lane 1 ^d	388	3.0	388	3.0	1343	0.289	100	4.1	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	388	3.0	388	3.0		0.289		4.1	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	305	3.0	305	3.0	882	0.346	100	7.9	LOS A	1.7	43.6	Full	300	0.0	0.0
Approach	305	3.0	305	3.0		0.346		7.9	LOS A	1.7	43.6				
All Vehicles	1304	3.0	1304	3.0		0.457		5.5	LOS A	3.4	87.6				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	611	611	3.0		1338	0.457	100	NA	NA
Approach	611	611	3.0			0.457			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	387	388	3.0	1343	0.289	100	NA	NA
Approach	1	387	388	3.0		0.289			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	2	302	305	3.0	882	0.346	100	NA	NA
Approach	2	302	305	3.0		0.346			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	1304	3.0	0.457						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2026 Baseline School PM (Site Folder: General)]**

Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

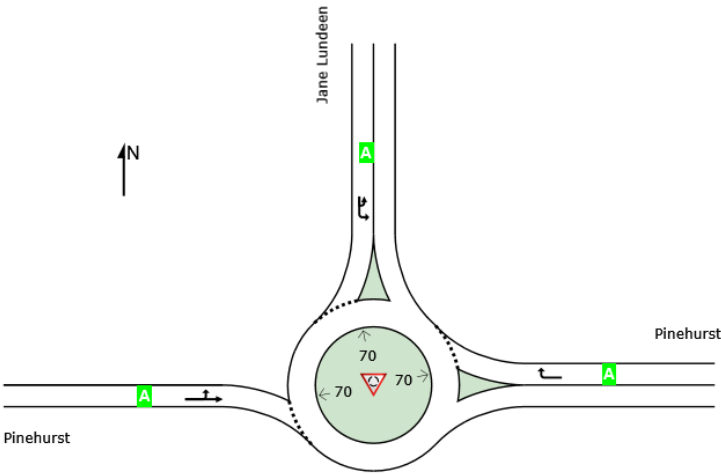

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2026 Baseline School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	551	3.0	551	3.0	1340	0.411	100	4.9	LOS A	2.8	72.9	Full	800	0.0	0.0
Approach	551	3.0	551	3.0		0.411		4.9	LOS A	2.8	72.9				
North: Jane Lundeen															
Lane 1 ^d	354	3.0	354	3.0	1343	0.263	100	4.0	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	354	3.0	354	3.0		0.263		4.0	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	139	3.0	139	3.0	916	0.152	100	5.4	LOS A	0.6	16.6	Full	300	0.0	0.0
Approach	139	3.0	139	3.0		0.152		5.4	LOS A	0.6	16.6				
All Vehicles	1044	3.0	1044	3.0		0.411		4.7	LOS A	2.8	72.9				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	551	551	3.0		1340	0.411	100	NA	NA
Approach	551	551	3.0			0.411			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	352	354	3.0	1343	0.263	100	NA	NA
Approach	1	352	354	3.0		0.263			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	138	139	3.0	916	0.152	100	NA	NA
Approach	1	138	139	3.0		0.152			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	1044	3.0	0.411						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE SUMMARY

 **Site: 101 [2026 Baseline PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	117	3.0	117	3.0	1340	0.087	100	3.1	LOS A	0.4	10.0	Full	800	0.0	0.0
Approach	117	3.0	117	3.0		0.087		3.1	LOS A	0.4	10.0				
North: Jane Lundeen															
Lane 1 ^d	84	3.0	84	3.0	1343	0.063	100	3.0	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	84	3.0	84	3.0		0.063		3.0	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	33	3.0	33	3.0	1226	0.027	100	3.1	LOS A	0.1	2.9	Full	300	0.0	0.0
Approach	33	3.0	33	3.0		0.027		3.1	LOS A	0.1	2.9				
All Vehicles	234	3.0	234	3.0		0.087		3.1	LOS A	0.4	10.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	117	117	3.0		1340	0.087	100	NA	NA
Approach	117	117	3.0			0.087			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	83	84	3.0	1343	0.063	100	NA	NA
Approach	1	83	84	3.0		0.063			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	32	33	3.0	1226	0.027	100	NA	NA
Approach	1	32	33	3.0		0.027			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	234	3.0	0.087						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2026 Baseline PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

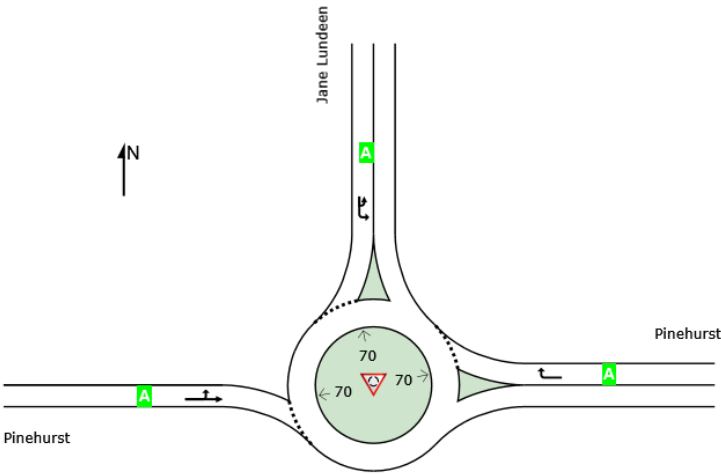

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:53:01 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2026 Baseline + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

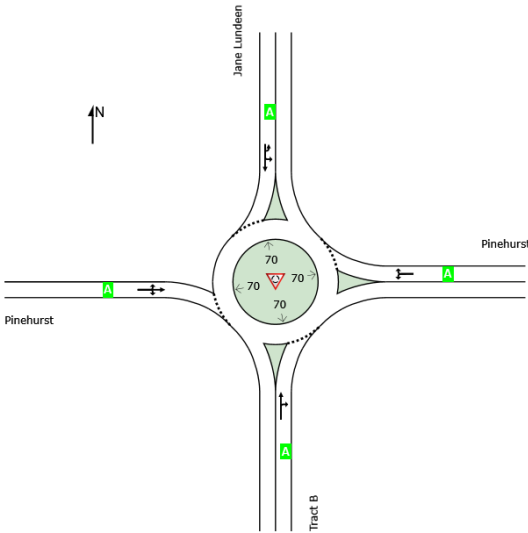

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2026 Baseline + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	14	3.0	14	3.0	621	0.023	100	6.0	LOS A	0.1	2.1	Full	300	0.0	0.0
Approach	14	3.0	14	3.0		0.023		6.0	LOS A	0.1	2.1				
East: Pinehurst															
Lane 1 ^d	617	3.0	617	3.0	1313	0.470	100	6.5	LOS A	3.5	90.5	Full	800	0.0	0.0
Approach	617	3.0	617	3.0		0.470		6.5	LOS A	3.5	90.5				
North: Jane Lundeen															
Lane 1 ^d	401	3.0	401	3.0	1341	0.299	100	4.2	LOS A	1.7	44.6	Full	600	0.0	0.0
Approach	401	3.0	401	3.0		0.299		4.2	LOS A	1.7	44.6				
West: Pinehurst															
Lane 1 ^d	316	3.0	316	3.0	868	0.363	100	8.2	LOS A	1.8	46.2	Full	300	0.0	0.0
Approach	316	3.0	316	3.0		0.363		8.2	LOS A	1.8	46.2				
All Vehicles	1348	3.0	1348	3.0		0.470		6.2	LOS A	3.5	90.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	13	1	14	3.0		621	0.023	100	NA	NA	
Approach	13	1	14	3.0			0.023				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	616	617	3.0		1313	0.470	100	NA	NA	
Approach	1	616	617	3.0			0.470				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	398	2	401	3.0	1341	0.299	100	NA	NA	
Approach	1	398	2	401	3.0		0.299				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	7	305	4	316	3.0	868	0.363	100	NA	NA	
Approach	7	305	4	316	3.0		0.363				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1348	3.0	0.470								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2026 Baseline + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

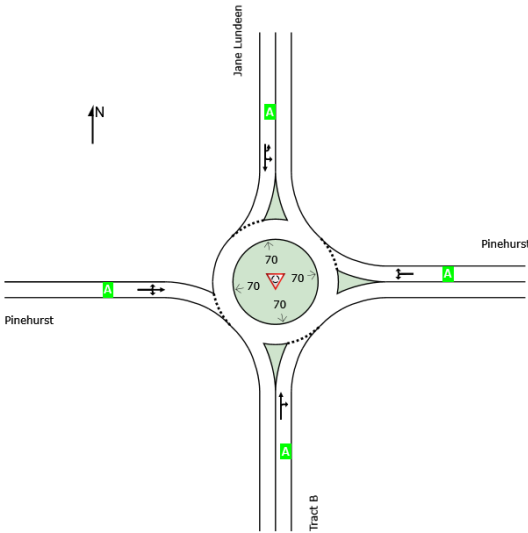

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:55:07 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2026 Baseline + Site School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	773	0.013	100	4.8	LOS A	0.0	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.013		4.8	LOS A	0.0	1.3				
East: Pinehurst															
Lane 1 ^d	556	3.0	556	3.0	1320	0.422	100	5.9	LOS A	2.9	75.1	Full	800	0.0	0.0
Approach	556	3.0	556	3.0		0.422		5.9	LOS A	2.9	75.1				
North: Jane Lundeen															
Lane 1 ^d	365	3.0	365	3.0	1341	0.272	100	4.1	LOS A	1.5	39.1	Full	600	0.0	0.0
Approach	365	3.0	365	3.0		0.272		4.1	LOS A	1.5	39.1				
West: Pinehurst															
Lane 1 ^d	157	3.0	157	3.0	903	0.174	100	5.7	LOS A	0.8	19.3	Full	300	0.0	0.0
Approach	157	3.0	157	3.0		0.174		5.7	LOS A	0.8	19.3				
All Vehicles	1089	3.0	1089	3.0		0.422		5.2	LOS A	2.9	75.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		773	0.013	100	NA	NA	
Approach	9	1	10	3.0			0.013				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	555	556	3.0		1320	0.422	100	NA	NA	
Approach	1	555	556	3.0			0.422				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	360	5	365	3.0	1341	0.272	100	NA	NA	
Approach	1	360	5	365	3.0		0.272				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	6	143	8	157	3.0	903	0.174	100	NA	NA	
Approach	6	143	8	157	3.0		0.174				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1089	3.0	0.422								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2026 Baseline + Site PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

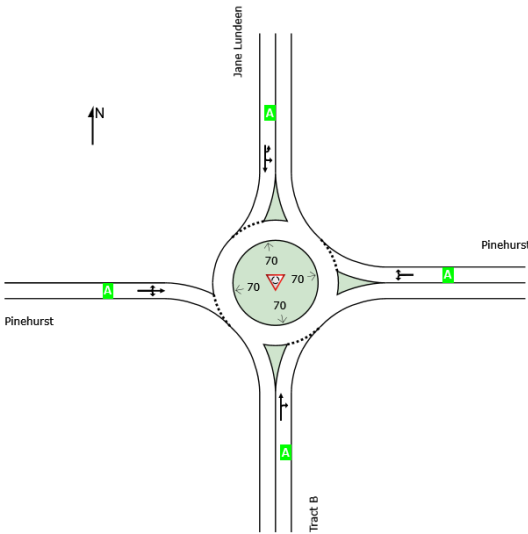

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:56:06 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2026 Baseline + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	3	3.0	3	3.0	1183	0.002	100	3.1	LOS A	0.0	0.2	Full	300	0.0	0.0
Approach	3	3.0	3	3.0		0.002		3.1	LOS A	0.0	0.2				
East: Pinehurst															
Lane 1 ^d	118	3.0	118	3.0	1338	0.088	100	3.2	LOS A	0.4	10.1	Full	800	0.0	0.0
Approach	118	3.0	118	3.0		0.088		3.2	LOS A	0.4	10.1				
North: Jane Lundeen															
Lane 1 ^d	85	3.0	85	3.0	1341	0.064	100	3.0	LOS A	0.3	7.1	Full	600	0.0	0.0
Approach	85	3.0	85	3.0		0.064		3.0	LOS A	0.3	7.1				
West: Pinehurst															
Lane 1 ^d	34	3.0	34	3.0	1223	0.028	100	3.2	LOS A	0.1	3.0	Full	300	0.0	0.0
Approach	34	3.0	34	3.0		0.028		3.2	LOS A	0.1	3.0				
All Vehicles	240	3.0	240	3.0		0.088		3.1	LOS A	0.4	10.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	1	1	3	3.0		1183	0.002	100	NA	NA	
Approach	1	1	3	3.0			0.002				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	117	118	3.0		1338	0.088	100	NA	NA	
Approach	1	117	118	3.0			0.088				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	1	83	1	85	3.0	1341	0.064	100	NA	NA	
Approach	1	83	1	85	3.0		0.064				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	1	32	1	34	3.0	1223	0.028	100	NA	NA	
Approach	1	32	1	34	3.0		0.028				
Total		%HV		Deg.Satn (v/c)							
All Vehicles	240	3.0		0.088							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

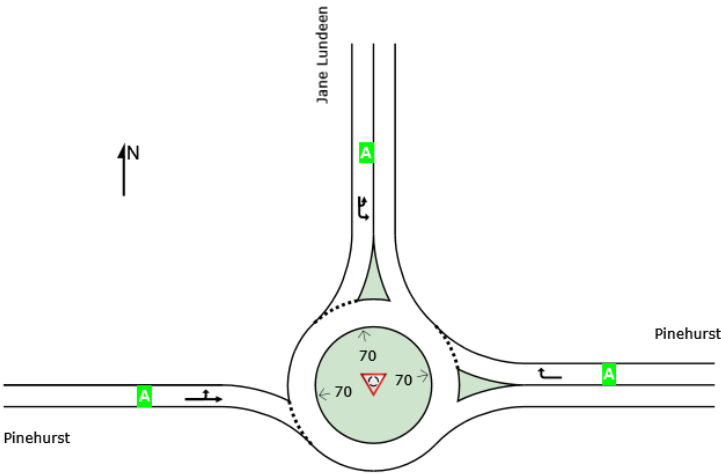

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:57:01 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2045 BG AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	620	3.0	620	3.0	1274	0.487	100	7.4	LOS A	3.7	93.8	Full	800	0.0	0.0
Approach	620	3.0	620	3.0		0.487		7.4	LOS A	3.7	93.8				
North: Jane Lundeen															
Lane 1 ^d	395	3.0	395	3.0	1343	0.294	100	4.2	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	395	3.0	395	3.0		0.294		4.2	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	350	3.0	350	3.0	876	0.400	100	8.7	LOS A	2.1	53.0	Full	300	0.0	0.0
Approach	350	3.0	350	3.0		0.400		8.7	LOS A	2.1	53.0				
All Vehicles	1365	3.0	1365	3.0		0.487		6.8	LOS A	3.7	93.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	620	620	3.0		1274	0.487	100	NA	NA
Approach	620	620	3.0			0.487			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	394	395	3.0	1343	0.294	100	NA	NA
Approach	1	394	395	3.0		0.294			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	48	302	350	3.0	876	0.400	100	NA	NA
Approach	48	302	350	3.0		0.400			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	1365	3.0	0.487						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2045 BG School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

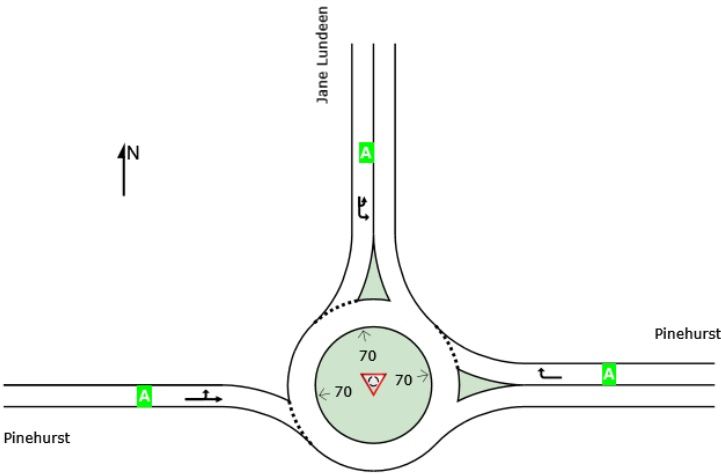

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2045 BG School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	572	3.0	572	3.0	1328	0.431	100	5.7	LOS A	3.1	78.4	Full	800	0.0	0.0
Approach	572	3.0	572	3.0		0.431		5.7	LOS A	3.1	78.4				
North: Jane Lundeen															
Lane 1 ^d	327	3.0	327	3.0	1343	0.244	100	3.9	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	327	3.0	327	3.0		0.244		3.9	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	164	3.0	164	3.0	942	0.174	100	5.5	LOS A	0.8	19.6	Full	300	0.0	0.0
Approach	164	3.0	164	3.0		0.174		5.5	LOS A	0.8	19.6				
All Vehicles	1064	3.0	1064	3.0		0.431		5.1	LOS A	3.1	78.4				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	572	572	3.0		1328	0.431	100	NA	NA
Approach	572	572	3.0			0.431			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	326	327	3.0	1343	0.244	100	NA	NA
Approach	1	326	327	3.0		0.244			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	10	155	164	3.0	942	0.174	100	NA	NA
Approach	10	155	164	3.0		0.174			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	1064	3.0	0.431						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches			Intersection
	East	North	West	
LOS	A	A	A	A

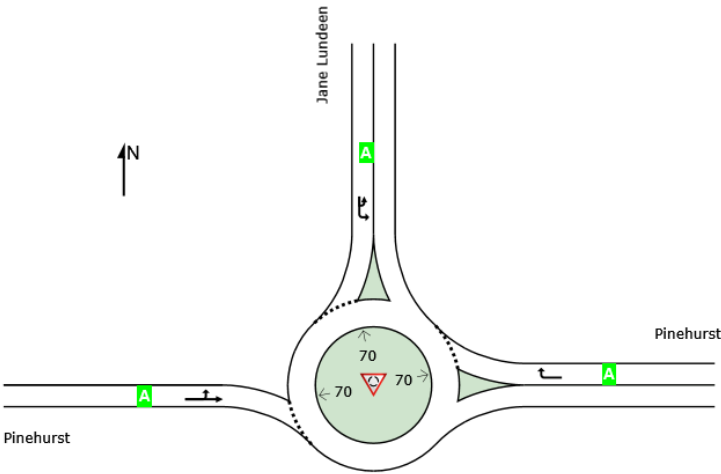

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:58:36 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2045 BG PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
East: Pinehurst															
Lane 1 ^d	133	3.0	133	3.0	1297	0.103	100	3.5	LOS A	0.5	11.9	Full	800	0.0	0.0
Approach	133	3.0	133	3.0		0.103		3.5	LOS A	0.5	11.9				
North: Jane Lundeen															
Lane 1 ^d	116	3.0	116	3.0	1343	0.086	100	3.1	LOS A	0.0	0.0	Full	600	0.0	0.0
Approach	116	3.0	116	3.0		0.086		3.1	LOS A	0.0	0.0				
West: Pinehurst															
Lane 1 ^d	106	3.0	106	3.0	1185	0.089	100	3.8	LOS A	0.4	9.9	Full	300	0.0	0.0
Approach	106	3.0	106	3.0		0.089		3.8	LOS A	0.4	9.9				
All Vehicles	355	3.0	355	3.0		0.103		3.5	LOS A	0.5	11.9				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

^d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)

East: Pinehurst									
Mov.	R2	Total	%HV						
From E					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N				veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	133	133	3.0		1297	0.103	100	NA	NA
Approach	133	133	3.0			0.103			
North: Jane Lundeen									
Mov.	U	L2	Total	%HV					
From N					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	1	115	116	3.0	1343	0.086	100	NA	NA
Approach	1	115	116	3.0		0.086			
West: Pinehurst									
Mov.	L2	T1	Total	%HV					
From W					Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E			veh/h	Satn	Util.	SL Ov.	Lane
						v/c	%	%	No.
Lane 1	31	74	106	3.0	1185	0.089	100	NA	NA
Approach	31	74	106	3.0		0.089			
	Total	%HV	Deg.Satn (v/c)						
All Vehicles	355	3.0	0.103						

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing		Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge
	Lane	Lane	Opng in	Flow Rate		Gap	Headway	Flow		Satn	Delay	Delay
	Number	Length	Lane					Rate				
		ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial	Residual	Time for	Duration
	Queued	Queued	Residual	of
	Demand	Demand	Demand	Oversatn
	veh	veh	to Clear	
			sec	sec
East: Pinehurst				

Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

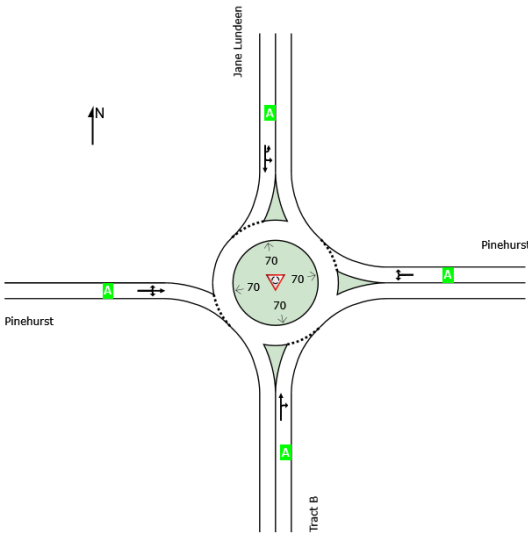

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:59:40 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	14	3.0	14	3.0	657	0.021	100	5.7	LOS A	0.1	2.0	Full	300	0.0	0.0
Approach	14	3.0	14	3.0		0.021		5.7	LOS A	0.1	2.0				
East: Pinehurst															
Lane 1 ^d	626	3.0	626	3.0	1247	0.502	100	7.9	LOS A	3.8	97.2	Full	800	0.0	0.0
Approach	626	3.0	626	3.0		0.502		7.9	LOS A	3.8	97.2				
North: Jane Lundeen															
Lane 1 ^d	304	3.0	304	3.0	1341	0.227	100	3.8	LOS A	1.2	30.6	Full	600	0.0	0.0
Approach	304	3.0	304	3.0		0.227		3.8	LOS A	1.2	30.6				
West: Pinehurst															
Lane 1 ^d	363	3.0	363	3.0	966	0.376	100	7.8	LOS A	2.0	51.1	Full	300	0.0	0.0
Approach	363	3.0	363	3.0		0.376		7.8	LOS A	2.0	51.1				
All Vehicles	1307	3.0	1307	3.0		0.502		6.9	LOS A	3.8	97.2				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	13	1	14	3.0		657	0.021	100	NA	NA	
Approach	13	1	14	3.0			0.021				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	624	626	3.0		1247	0.502	100	NA	NA	
Approach	1	624	626	3.0			0.502				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	298	5	304	3.0	1341	0.227	100	NA	NA	
Approach	1	298	5	304	3.0		0.227				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	55	305	4	363	3.0	966	0.376	100	NA	NA	
Approach	55	305	4	363	3.0		0.376				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1307	3.0	0.502								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	773	0.013	100	4.8	LOS A	0.0	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.013		4.8	LOS A	0.0	1.3				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1306	0.442	100	6.4	LOS A	3.2	80.8	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.442		6.4	LOS A	3.2	80.8				
North: Jane Lundeen															
Lane 1 ^d	339	3.0	339	3.0	1341	0.253	100	4.0	LOS A	1.4	35.4	Full	600	0.0	0.0
Approach	339	3.0	339	3.0		0.253		4.0	LOS A	1.4	35.4				
West: Pinehurst															
Lane 1 ^d	184	3.0	184	3.0	929	0.198	100	5.8	LOS A	0.9	22.5	Full	300	0.0	0.0
Approach	184	3.0	184	3.0		0.198		5.8	LOS A	0.9	22.5				
All Vehicles	1111	3.0	1111	3.0		0.442		5.5	LOS A	3.2	80.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	9	1	10	3.0		773	0.013	100	NA	NA	
Approach	9	1	10	3.0			0.013				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	577	578	3.0		1306	0.442	100	NA	NA	
Approach	1	577	578	3.0			0.442				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	1	333	5	339	3.0	1341	0.253	100	NA	NA	
Approach	1	333	5	339	3.0		0.253				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	16	160	8	184	3.0	929	0.198	100	NA	NA	
Approach	16	160	8	184	3.0		0.198				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1111	3.0	0.442								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

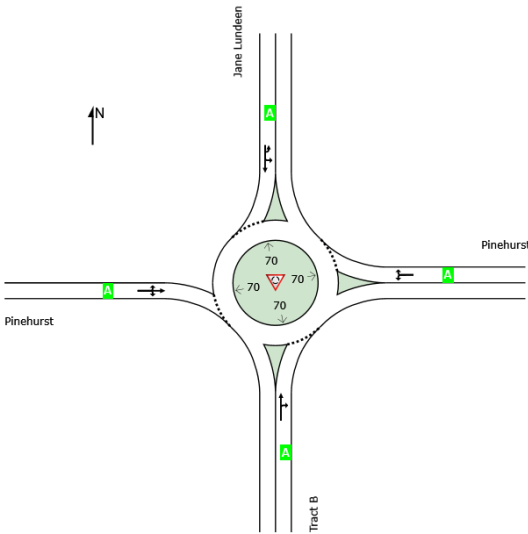

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 11:00:34 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

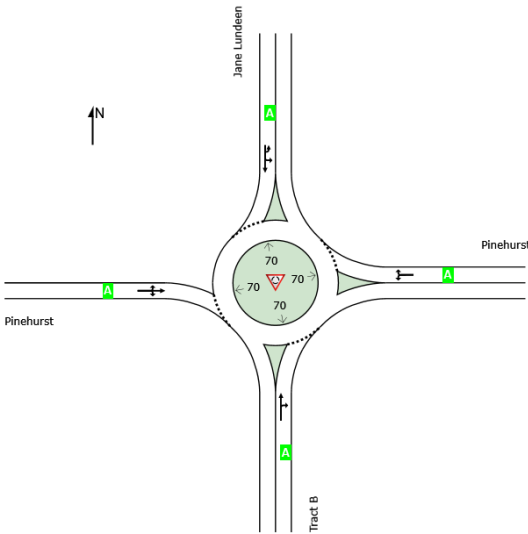

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 11:01:20 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen.sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	1035	0.010	100	3.6	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.6	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	138	3.0	138	3.0	1273	0.108	100	3.6	LOS A	0.5	12.5	Full	800	0.0	0.0
Approach	138	3.0	138	3.0		0.108		3.6	LOS A	0.5	12.5				
North: Jane Lundeen															
Lane 1 ^d	129	3.0	129	3.0	1341	0.096	100	3.2	LOS A	0.4	11.1	Full	600	0.0	0.0
Approach	129	3.0	129	3.0		0.096		3.2	LOS A	0.4	11.1				
West: Pinehurst															
Lane 1 ^d	159	3.0	159	3.0	1167	0.137	100	4.2	LOS A	0.6	15.8	Full	300	0.0	0.0
Approach	159	3.0	159	3.0		0.137		4.2	LOS A	0.6	15.8				
All Vehicles	436	3.0	436	3.0		0.137		3.7	LOS A	0.6	15.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	9	1	10	3.0		1035	0.010	100	NA	NA	
Approach	9	1	10	3.0			0.010				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	137	138	3.0		1273	0.108	100	NA	NA	
Approach	1	137	138	3.0			0.108				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	1	121	6	129	3.0	1341	0.096	100	NA	NA	
Approach	1	121	6	129	3.0		0.096				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	40	79	41	159	3.0	1167	0.137	100	NA	NA	
Approach	40	79	41	159	3.0		0.137				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	436	3.0	0.137								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

Sidra Reports

**Jane Lundeen + Pinehurst
(A,B,C,D,E,F)**

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	B	A	B	A

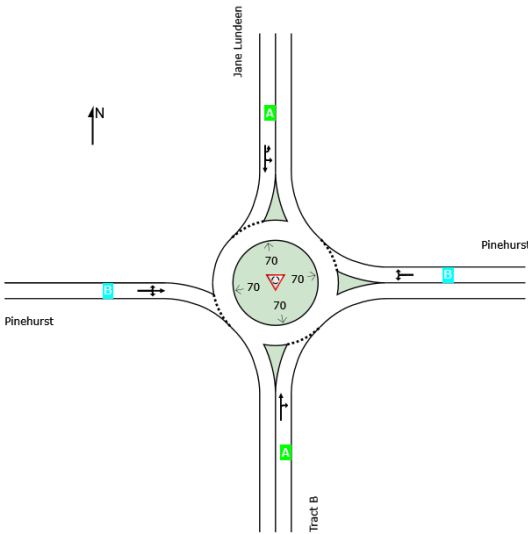

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:11:20 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (A).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	15	3.0	15	3.0	552	0.028	100	6.8	LOS A	0.1	2.5	Full	300	0.0	0.0
Approach	15	3.0	15	3.0		0.028		6.8	LOS A	0.1	2.5				
East: Pinehurst															
Lane 1 ^d	801	3.0	801	3.0	1177	0.681	100	12.1	LOS B	6.8	173.4	Full	800	0.0	0.0
Approach	801	3.0	801	3.0		0.681		12.1	LOS B	6.8	173.4				
North: Jane Lundeen															
Lane 1 ^d	468	3.0	468	3.0	1341	0.349	100	4.5	LOS A	2.2	56.0	Full	600	0.0	0.0
Approach	468	3.0	468	3.0		0.349		4.5	LOS A	2.2	56.0				
West: Pinehurst															
Lane 1 ^d	356	3.0	356	3.0	808	0.441	100	10.0	LOS B	2.7	68.1	Full	300	0.0	0.0
Approach	356	3.0	356	3.0		0.441		10.0	LOS B	2.7	68.1				
All Vehicles	1641	3.0	1641	3.0		0.681		9.4	LOS A	6.8	173.4				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	14	1	15	3.0		552	0.028	100	NA	NA	
Approach	14	1	15	3.0			0.028				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	800	801	3.0		1177	0.681	100	NA	NA	
Approach	1	800	801	3.0			0.681				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	70	396	2	468	3.0	1341	0.349	100	NA	NA	
Approach	70	396	2	468	3.0		0.349				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	38	314	4	356	3.0	808	0.441	100	NA	NA	
Approach	38	314	4	356	3.0		0.441				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1641	3.0	0.681								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

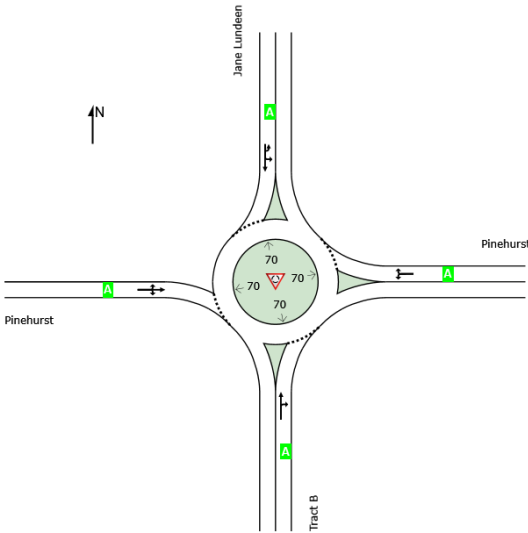

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	750	0.014	100	4.9	LOS A	0.1	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.014		4.9	LOS A	0.1	1.3				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1248	0.463	100	7.3	LOS A	3.3	84.0	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.463		7.3	LOS A	3.3	84.0				
North: Jane Lundeen															
Lane 1 ^d	354	3.0	354	3.0	1341	0.264	100	4.0	LOS A	1.5	37.4	Full	600	0.0	0.0
Approach	354	3.0	354	3.0		0.264		4.0	LOS A	1.5	37.4				
West: Pinehurst															
Lane 1 ^d	197	3.0	197	3.0	915	0.215	100	6.1	LOS A	1.0	24.7	Full	300	0.0	0.0
Approach	197	3.0	197	3.0		0.215		6.1	LOS A	1.0	24.7				
All Vehicles	1138	3.0	1138	3.0		0.463		6.1	LOS A	3.3	84.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		750	0.014	100	NA	NA	
Approach	9	1	10	3.0			0.014				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	577	578	3.0		1248	0.463	100	NA	NA	
Approach	1	577	578	3.0			0.463				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	30	319	5	354	3.0	1341	0.264	100	NA	NA	
Approach	30	319	5	354	3.0		0.264				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	29	160	8	197	3.0	915	0.215	100	NA	NA	
Approach	29	160	8	197	3.0		0.215				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1138	3.0	0.463								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

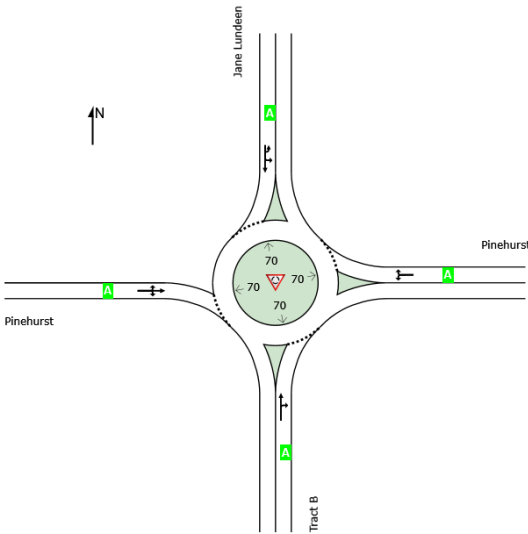

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:14:25 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (A).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	986	0.010	100	3.7	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.7	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	135	3.0	135	3.0	1202	0.112	100	3.9	LOS A	0.5	12.8	Full	800	0.0	0.0
Approach	135	3.0	135	3.0		0.112		3.9	LOS A	0.5	12.8				
North: Jane Lundeen															
Lane 1 ^d	139	3.0	139	3.0	1341	0.104	100	3.2	LOS A	0.5	12.1	Full	600	0.0	0.0
Approach	139	3.0	139	3.0		0.104		3.2	LOS A	0.5	12.1				
West: Pinehurst															
Lane 1 ^d	161	3.0	161	3.0	1154	0.139	100	4.3	LOS A	0.6	16.1	Full	300	0.0	0.0
Approach	161	3.0	161	3.0		0.139		4.3	LOS A	0.6	16.1				
All Vehicles	445	3.0	445	3.0		0.139		3.8	LOS A	0.6	16.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: Tract B										
Mov.	T1	R2	Total	%HV						
From S						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	9	1	10	3.0		986	0.010	100	NA	NA
Approach	9	1	10	3.0			0.010			
East: Pinehurst										
Mov.	L2	R2	Total	%HV						
From E						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	1	133	135	3.0		1202	0.112	100	NA	NA
Approach	1	133	135	3.0			0.112			
North: Jane Lundeen										
Mov.	U	L2	T1	Total	%HV					
From N						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	20	113	6	139	3.0	1341	0.104	100	NA	NA
Approach	20	113	6	139	3.0		0.104			
West: Pinehurst										
Mov.	L2	T1	R2	Total	%HV					
From W						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	73	79	8	161	3.0	1154	0.139	100	NA	NA
Approach	73	79	8	161	3.0		0.139			
	Total	%HV	Deg.Satn (v/c)							
All Vehicles	445	3.0	0.139							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	B	A	B	A

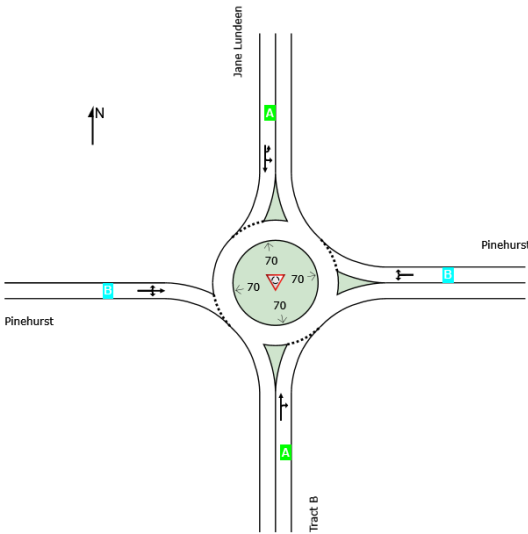

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:47:30 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (B).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	21	3.0	21	3.0	516	0.040	100	7.4	LOS A	0.1	3.5	Full	300	0.0	0.0
Approach	21	3.0	21	3.0		0.040		7.4	LOS A	0.1	3.5				
East: Pinehurst															
Lane 1 ^d	608	3.0	608	3.0	1084	0.561	100	10.1	LOS B	4.1	103.7	Full	800	0.0	0.0
Approach	608	3.0	608	3.0		0.561		10.1	LOS B	4.1	103.7				
North: Jane Lundeen															
Lane 1 ^d	525	3.0	525	3.0	1341	0.391	100	4.7	LOS A	2.6	67.1	Full	600	0.0	0.0
Approach	525	3.0	525	3.0		0.391		4.7	LOS A	2.6	67.1				
West: Pinehurst															
Lane 1 ^d	362	3.0	362	3.0	760	0.477	100	11.3	LOS B	3.1	78.9	Full	300	0.0	0.0
Approach	362	3.0	362	3.0		0.477		11.3	LOS B	3.1	78.9				
All Vehicles	1515	3.0	1515	3.0		0.561		8.5	LOS A	4.1	103.7				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	19	1	21	3.0		516	0.040	100	NA	NA	
Approach	19	1	21	3.0			0.040				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	607	608	3.0		1084	0.561	100	NA	NA	
Approach	1	607	608	3.0			0.561				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	127	396	2	525	3.0	1341	0.391	100	NA	NA	
Approach	127	396	2	525	3.0		0.391				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	52	305	5	362	3.0	760	0.477	100	NA	NA	
Approach	52	305	5	362	3.0		0.477				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1515	3.0	0.561								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	755	0.014	100	4.9	LOS A	0.1	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.014		4.9	LOS A	0.1	1.3				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1257	0.460	100	7.2	LOS A	3.3	83.5	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.460		7.2	LOS A	3.3	83.5				
North: Jane Lundeen															
Lane 1 ^d	357	3.0	357	3.0	1341	0.266	100	4.0	LOS A	1.5	37.9	Full	600	0.0	0.0
Approach	357	3.0	357	3.0		0.266		4.0	LOS A	1.5	37.9				
West: Pinehurst															
Lane 1 ^d	187	3.0	187	3.0	911	0.205	100	6.0	LOS A	0.9	23.4	Full	300	0.0	0.0
Approach	187	3.0	187	3.0		0.205		6.0	LOS A	0.9	23.4				
All Vehicles	1132	3.0	1132	3.0		0.460		6.0	LOS A	3.3	83.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		755	0.014	100	NA	NA	
Approach	9	1	10	3.0			0.014				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	577	578	3.0		1257	0.460	100	NA	NA	
Approach	1	577	578	3.0			0.460				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	33	319	5	357	3.0	1341	0.266	100	NA	NA	
Approach	33	319	5	357	3.0		0.266				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	19	160	8	187	3.0	911	0.205	100	NA	NA	
Approach	19	160	8	187	3.0		0.205				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1132	3.0	0.460								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

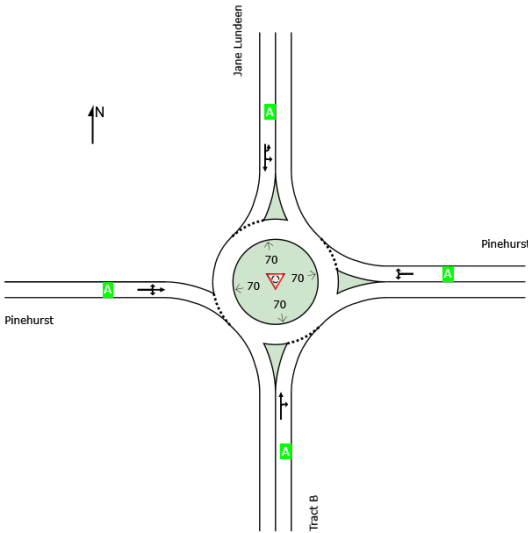

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:49:19 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (B).sip9

LANE LEVEL OF SERVICE


Lane Level of Service

 Site: 101 [2045 BG + Site PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

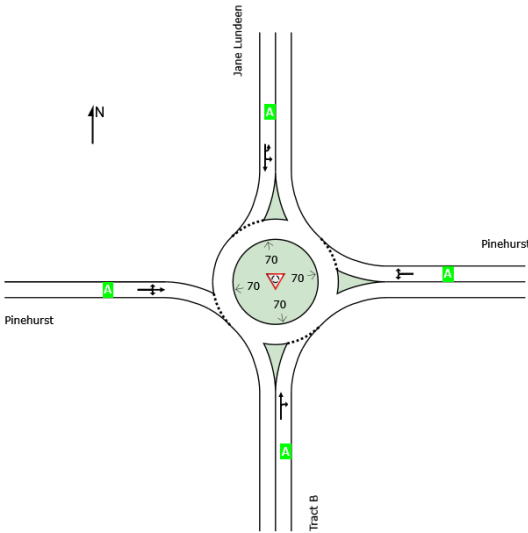

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	1021	0.010	100	3.6	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.6	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	135	3.0	135	3.0	1241	0.108	100	3.7	LOS A	0.5	12.4	Full	800	0.0	0.0
Approach	135	3.0	135	3.0		0.108		3.7	LOS A	0.5	12.4				
North: Jane Lundeen															
Lane 1 ^d	198	3.0	198	3.0	1341	0.148	100	3.4	LOS A	0.7	18.1	Full	600	0.0	0.0
Approach	198	3.0	198	3.0		0.148		3.4	LOS A	0.7	18.1				
West: Pinehurst															
Lane 1 ^d	128	3.0	128	3.0	1082	0.119	100	4.3	LOS A	0.5	13.2	Full	300	0.0	0.0
Approach	128	3.0	128	3.0		0.119		4.3	LOS A	0.5	13.2				
All Vehicles	472	3.0	472	3.0		0.148		3.8	LOS A	0.7	18.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	9	1	10	3.0		1021	0.010	100	NA	NA	
Approach	9	1	10	3.0			0.010				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	133	135	3.0		1241	0.108	100	NA	NA	
Approach	1	133	135	3.0			0.108				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	20	113	65	198	3.0	1341	0.148	100	NA	NA	
Approach	20	113	65	198	3.0		0.148				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	43	77	8	128	3.0	1082	0.119	100	NA	NA	
Approach	43	77	8	128	3.0		0.119				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	472	3.0	0.148								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	B	A	A	A

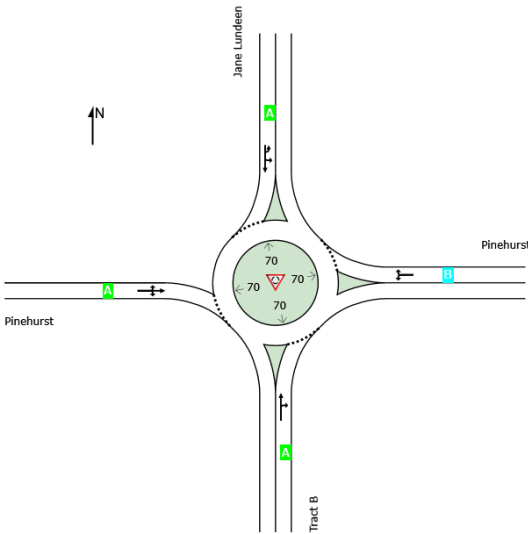

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:51:54 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (C).sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	15	3.0	15	3.0	568	0.027	100	6.6	LOS A	0.1	2.5	Full	300	0.0	0.0
Approach	15	3.0	15	3.0		0.027		6.6	LOS A	0.1	2.5				
East: Pinehurst															
Lane 1 ^d	801	3.0	801	3.0	1210	0.662	100	11.2	LOS B	6.6	169.3	Full	800	0.0	0.0
Approach	801	3.0	801	3.0		0.662		11.2	LOS B	6.6	169.3				
North: Jane Lundeen															
Lane 1 ^d	443	3.0	443	3.0	1341	0.330	100	4.4	LOS A	2.0	51.5	Full	600	0.0	0.0
Approach	443	3.0	443	3.0		0.330		4.4	LOS A	2.0	51.5				
West: Pinehurst															
Lane 1 ^d	356	3.0	356	3.0	830	0.429	100	9.6	LOS A	2.5	64.1	Full	300	0.0	0.0
Approach	356	3.0	356	3.0		0.429		9.6	LOS A	2.5	64.1				
All Vehicles	1615	3.0	1615	3.0		0.662		9.0	LOS A	6.6	169.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	14	1	15	3.0		568	0.027	100	NA	NA	
Approach	14	1	15	3.0			0.027				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	800	801	3.0		1210	0.662	100	NA	NA	
Approach	1	800	801	3.0			0.662				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	45	396	2	443	3.0	1341	0.330	100	NA	NA	
Approach	45	396	2	443	3.0		0.330				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	38	314	4	356	3.0	830	0.429	100	NA	NA	
Approach	38	314	4	356	3.0		0.429				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1615	3.0	0.662								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site School PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

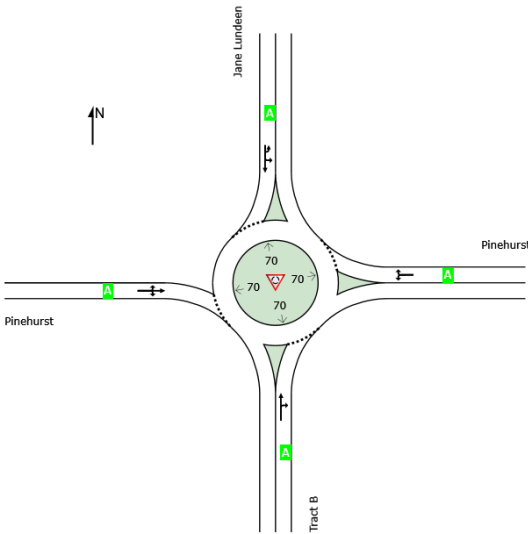

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:53:06 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (C).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	760	0.014	100	4.9	LOS A	0.1	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.014		4.9	LOS A	0.1	1.3				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1264	0.457	100	7.1	LOS A	3.2	83.1	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.457		7.1	LOS A	3.2	83.1				
North: Jane Lundeen															
Lane 1 ^d	342	3.0	342	3.0	1341	0.255	100	4.0	LOS A	1.4	35.8	Full	600	0.0	0.0
Approach	342	3.0	342	3.0		0.255		4.0	LOS A	1.4	35.8				
West: Pinehurst															
Lane 1 ^d	197	3.0	197	3.0	926	0.213	100	6.0	LOS A	1.0	24.4	Full	300	0.0	0.0
Approach	197	3.0	197	3.0		0.213		6.0	LOS A	1.0	24.4				
All Vehicles	1127	3.0	1127	3.0		0.457		5.9	LOS A	3.2	83.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		760	0.014	100	NA	NA	
Approach	9	1	10	3.0			0.014				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	577	578	3.0		1264	0.457	100	NA	NA	
Approach	1	577	578	3.0			0.457				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	18	319	5	342	3.0	1341	0.255	100	NA	NA	
Approach	18	319	5	342	3.0		0.255				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	29	160	8	197	3.0	926	0.213	100	NA	NA	
Approach	29	160	8	197	3.0		0.213				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1127	3.0	0.457								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

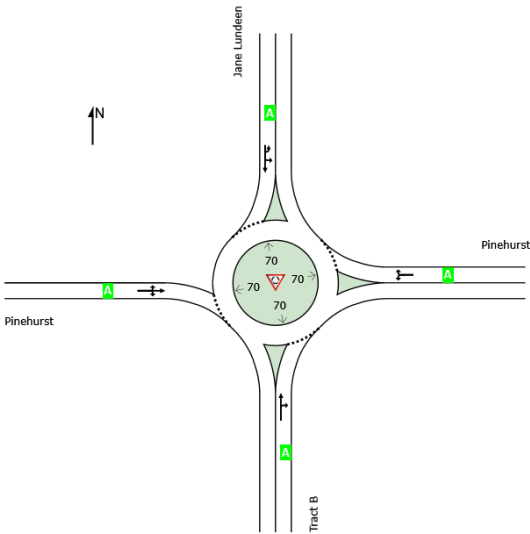

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:54:05 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (C).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] [veh/h %]		Arrival Flows [Total HV] [veh/h %]		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] [ft]		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	987	0.010	100	3.7	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.7	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	135	3.0	135	3.0	1200	0.112	100	3.9	LOS A	0.5	12.8	Full	800	0.0	0.0
Approach	135	3.0	135	3.0		0.112		3.9	LOS A	0.5	12.8				
North: Jane Lundeen															
Lane 1 ^d	139	3.0	139	3.0	1341	0.104	100	3.2	LOS A	0.5	12.1	Full	600	0.0	0.0
Approach	139	3.0	139	3.0		0.104		3.2	LOS A	0.5	12.1				
West: Pinehurst															
Lane 1 ^d	160	3.0	160	3.0	1154	0.138	100	4.3	LOS A	0.6	16.0	Full	300	0.0	0.0
Approach	160	3.0	160	3.0		0.138		4.3	LOS A	0.6	16.0				
All Vehicles	444	3.0	444	3.0		0.138		3.8	LOS A	0.6	16.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		987	0.010	100	NA	NA	
Approach	9	1	10	3.0			0.010				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	133	135	3.0		1200	0.112	100	NA	NA	
Approach	1	133	135	3.0			0.112				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	20	113	6	139	3.0	1341	0.104	100	NA	NA	
Approach	20	113	6	139	3.0		0.104				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	75	77	8	160	3.0	1154	0.138	100	NA	NA	
Approach	75	77	8	160	3.0		0.138				
	Total	%HV		Deg.Satn (v/c)							
All Vehicles	444	3.0		0.138							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	B	A	A	A

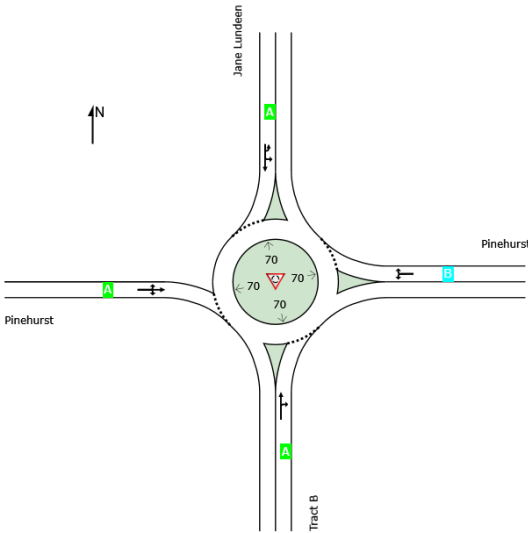

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:55:30 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (D).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	15	3.0	15	3.0	698	0.022	100	5.4	LOS A	0.1	2.1	Full	300	0.0	0.0
Approach	15	3.0	15	3.0		0.022		5.4	LOS A	0.1	2.1				
East: Pinehurst															
Lane 1 ^d	801	3.0	801	3.0	1180	0.679	100	12.0	LOS B	6.8	173.0	Full	800	0.0	0.0
Approach	801	3.0	801	3.0		0.679		12.0	LOS B	6.8	173.0				
North: Jane Lundeen															
Lane 1 ^d	253	3.0	253	3.0	1341	0.188	100	3.6	LOS A	0.9	24.3	Full	600	0.0	0.0
Approach	253	3.0	253	3.0		0.188		3.6	LOS A	0.9	24.3				
West: Pinehurst															
Lane 1 ^d	356	3.0	356	3.0	1020	0.349	100	7.1	LOS A	1.9	47.5	Full	300	0.0	0.0
Approach	356	3.0	356	3.0		0.349		7.1	LOS A	1.9	47.5				
All Vehicles	1425	3.0	1425	3.0		0.679		9.2	LOS A	6.8	173.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	14	1	15	3.0		698	0.022	100	NA	NA	
Approach	14	1	15	3.0			0.022				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	800	801	3.0		1180	0.679	100	NA	NA	
Approach	1	800	801	3.0			0.679				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	67	183	2	253	3.0	1341	0.188	100	NA	NA	
Approach	67	183	2	253	3.0		0.188				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	38	314	4	356	3.0	1020	0.349	100	NA	NA	
Approach	38	314	4	356	3.0		0.349				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1425	3.0	0.679								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2045 BG + Site School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

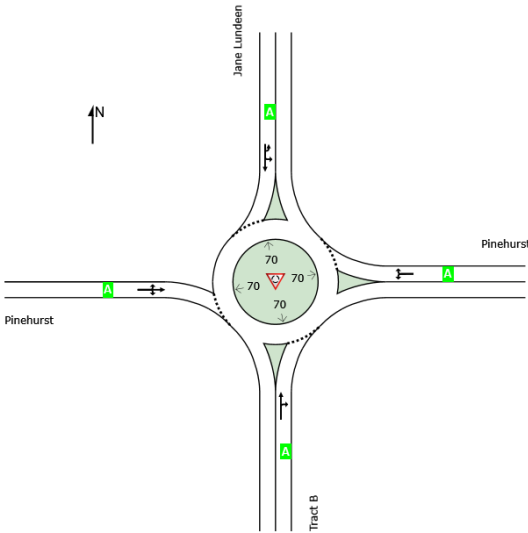

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	632	0.016	100	5.9	LOS A	0.1	1.5	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.016		5.9	LOS A	0.1	1.5				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1248	0.463	100	7.3	LOS A	3.3	84.0	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.463		7.3	LOS A	3.3	84.0				
North: Jane Lundeen															
Lane 1 ^d	354	3.0	354	3.0	1341	0.264	100	4.0	LOS A	1.5	37.4	Full	600	0.0	0.0
Approach	354	3.0	354	3.0		0.264		4.0	LOS A	1.5	37.4				
West: Pinehurst															
Lane 1 ^d	354	3.0	354	3.0	915	0.387	100	8.3	LOS A	2.0	51.6	Full	300	0.0	0.0
Approach	354	3.0	354	3.0		0.387		8.3	LOS A	2.0	51.6				
All Vehicles	1295	3.0	1295	3.0		0.463		6.7	LOS A	3.3	84.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		632	0.016	100	NA	NA	
Approach	9	1	10	3.0			0.016				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	577	578	3.0		1248	0.463	100	NA	NA	
Approach	1	577	578	3.0			0.463				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	30	319	5	354	3.0	1341	0.264	100	NA	NA	
Approach	30	319	5	354	3.0		0.264				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	29	317	8	354	3.0	915	0.387	100	NA	NA	
Approach	29	317	8	354	3.0		0.387				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1295	3.0	0.463								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

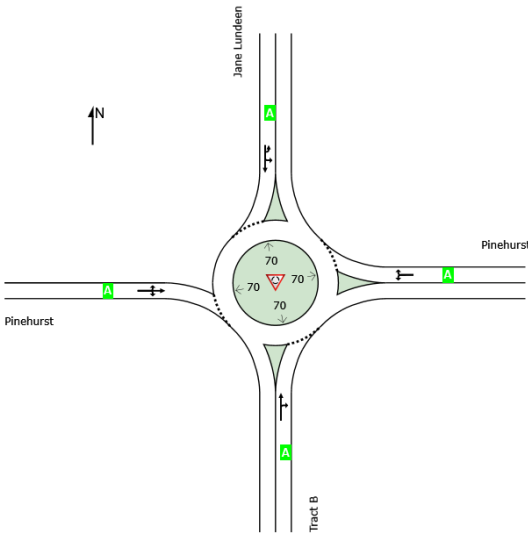

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:57:41 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (D).sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	987	0.010	100	3.7	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.7	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	135	3.0	135	3.0	1200	0.112	100	3.9	LOS A	0.5	12.8	Full	800	0.0	0.0
Approach	135	3.0	135	3.0		0.112		3.9	LOS A	0.5	12.8				
North: Jane Lundeen															
Lane 1 ^d	139	3.0	139	3.0	1341	0.104	100	3.2	LOS A	0.5	12.1	Full	600	0.0	0.0
Approach	139	3.0	139	3.0		0.104		3.2	LOS A	0.5	12.1				
West: Pinehurst															
Lane 1 ^d	160	3.0	160	3.0	1154	0.138	100	4.3	LOS A	0.6	16.0	Full	300	0.0	0.0
Approach	160	3.0	160	3.0		0.138		4.3	LOS A	0.6	16.0				
All Vehicles	444	3.0	444	3.0		0.138		3.8	LOS A	0.6	16.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		987	0.010	100	NA	NA	
Approach	9	1	10	3.0			0.010				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	133	135	3.0		1200	0.112	100	NA	NA	
Approach	1	133	135	3.0			0.112				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	20	113	6	139	3.0	1341	0.104	100	NA	NA	
Approach	20	113	6	139	3.0		0.104				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	75	77	8	160	3.0	1154	0.138	100	NA	NA	
Approach	75	77	8	160	3.0		0.138				
	Total	%HV		Deg.Satn (v/c)							
All Vehicles	444	3.0		0.138							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	B	A

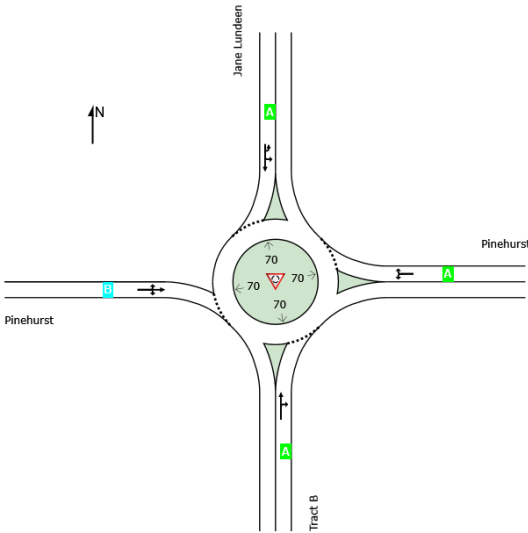

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 9:59:04 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (E).sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	15	3.0	15	3.0	549	0.028	100	6.9	LOS A	0.1	2.5	Full	300	0.0	0.0
Approach	15	3.0	15	3.0		0.028		6.9	LOS A	0.1	2.5				
East: Pinehurst															
Lane 1 ^d	603	3.0	603	3.0	1171	0.515	100	8.6	LOS A	3.7	95.9	Full	800	0.0	0.0
Approach	603	3.0	603	3.0		0.515		8.6	LOS A	3.7	95.9				
North: Jane Lundeen															
Lane 1 ^d	473	3.0	473	3.0	1341	0.352	100	4.5	LOS A	2.2	56.9	Full	600	0.0	0.0
Approach	473	3.0	473	3.0		0.352		4.5	LOS A	2.2	56.9				
West: Pinehurst															
Lane 1 ^d	356	3.0	356	3.0	804	0.443	100	10.1	LOS B	2.7	68.8	Full	300	0.0	0.0
Approach	356	3.0	356	3.0		0.443		10.1	LOS B	2.7	68.8				
All Vehicles	1448	3.0	1448	3.0		0.515		7.6	LOS A	3.7	95.9				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	14	1	15	3.0		549	0.028	100	NA	NA	
Approach	14	1	15	3.0			0.028				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	602	603	3.0		1171	0.515	100	NA	NA	
Approach	1	602	603	3.0			0.515				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	75	396	2	473	3.0	1341	0.352	100	NA	NA	
Approach	75	396	2	473	3.0		0.352				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	38	314	4	356	3.0	804	0.443	100	NA	NA	
Approach	38	314	4	356	3.0		0.443				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1448	3.0	0.515								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2045 BG + Site School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

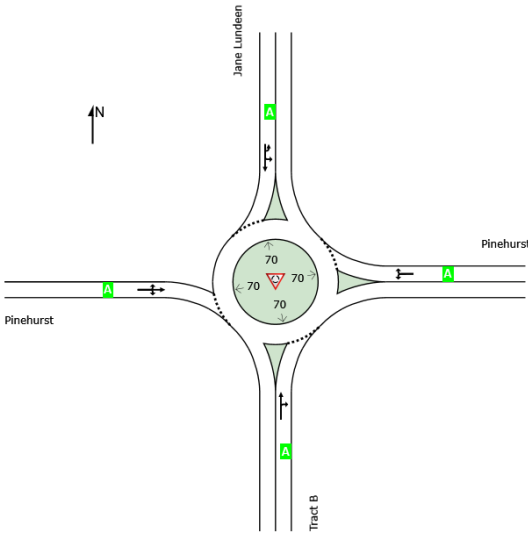

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	747	0.014	100	4.9	LOS A	0.1	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.014		4.9	LOS A	0.1	1.3				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1244	0.465	100	7.4	LOS A	3.3	84.3	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.465		7.4	LOS A	3.3	84.3				
North: Jane Lundeen															
Lane 1 ^d	357	3.0	357	3.0	1341	0.266	100	4.0	LOS A	1.5	37.9	Full	600	0.0	0.0
Approach	357	3.0	357	3.0		0.266		4.0	LOS A	1.5	37.9				
West: Pinehurst															
Lane 1 ^d	197	3.0	197	3.0	911	0.216	100	6.1	LOS A	1.0	24.8	Full	300	0.0	0.0
Approach	197	3.0	197	3.0		0.216		6.1	LOS A	1.0	24.8				
All Vehicles	1142	3.0	1142	3.0		0.465		6.1	LOS A	3.3	84.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		747	0.014	100	NA	NA	
Approach	9	1	10	3.0			0.014				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	577	578	3.0		1244	0.465	100	NA	NA	
Approach	1	577	578	3.0			0.465				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	33	319	5	357	3.0	1341	0.266	100	NA	NA	
Approach	33	319	5	357	3.0		0.266				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	29	160	8	197	3.0	911	0.216	100	NA	NA	
Approach	29	160	8	197	3.0		0.216				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1142	3.0	0.465								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

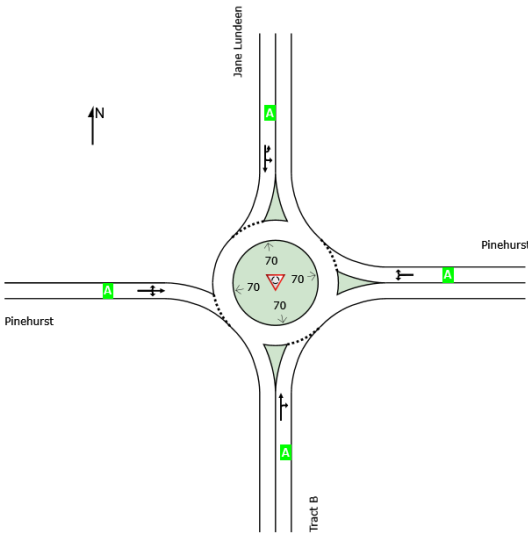

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:01:04 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (E).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	987	0.010	100	3.7	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.7	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	135	3.0	135	3.0	1200	0.112	100	3.9	LOS A	0.5	12.8	Full	800	0.0	0.0
Approach	135	3.0	135	3.0		0.112		3.9	LOS A	0.5	12.8				
North: Jane Lundeen															
Lane 1 ^d	139	3.0	139	3.0	1341	0.104	100	3.2	LOS A	0.5	12.1	Full	600	0.0	0.0
Approach	139	3.0	139	3.0		0.104		3.2	LOS A	0.5	12.1				
West: Pinehurst															
Lane 1 ^d	160	3.0	160	3.0	1154	0.138	100	4.3	LOS A	0.6	16.0	Full	300	0.0	0.0
Approach	160	3.0	160	3.0		0.138		4.3	LOS A	0.6	16.0				
All Vehicles	444	3.0	444	3.0		0.138		3.8	LOS A	0.6	16.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		987	0.010	100	NA	NA	
Approach	9	1	10	3.0			0.010				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	133	135	3.0		1200	0.112	100	NA	NA	
Approach	1	133	135	3.0			0.112				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	20	113	6	139	3.0	1341	0.104	100	NA	NA	
Approach	20	113	6	139	3.0		0.104				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	75	77	8	160	3.0	1154	0.138	100	NA	NA	
Approach	75	77	8	160	3.0		0.138				
	Total	%HV		Deg.Satn (v/c)							
All Vehicles	444	3.0		0.138							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	B	A	A	A

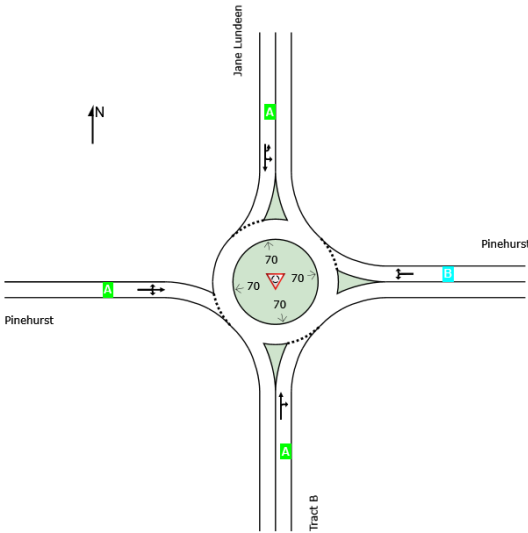

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2045 BG + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	15	3.0	15	3.0	568	0.027	100	6.6	LOS A	0.1	2.5	Full	300	0.0	0.0
Approach	15	3.0	15	3.0		0.027		6.6	LOS A	0.1	2.5				
East: Pinehurst															
Lane 1 ^d	801	3.0	801	3.0	1210	0.662	100	11.2	LOS B	6.6	169.3	Full	800	0.0	0.0
Approach	801	3.0	801	3.0		0.662		11.2	LOS B	6.6	169.3				
North: Jane Lundeen															
Lane 1 ^d	443	3.0	443	3.0	1341	0.330	100	4.4	LOS A	2.0	51.5	Full	600	0.0	0.0
Approach	443	3.0	443	3.0		0.330		4.4	LOS A	2.0	51.5				
West: Pinehurst															
Lane 1 ^d	356	3.0	356	3.0	830	0.429	100	9.6	LOS A	2.5	64.1	Full	300	0.0	0.0
Approach	356	3.0	356	3.0		0.429		9.6	LOS A	2.5	64.1				
All Vehicles	1615	3.0	1615	3.0		0.662		9.0	LOS A	6.6	169.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	14	1	15	3.0		568	0.027	100	NA	NA	
Approach	14	1	15	3.0			0.027				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	800	801	3.0		1210	0.662	100	NA	NA	
Approach	1	800	801	3.0			0.662				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	45	396	2	443	3.0	1341	0.330	100	NA	NA	
Approach	45	396	2	443	3.0		0.330				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	38	314	4	356	3.0	830	0.429	100	NA	NA	
Approach	38	314	4	356	3.0		0.429				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1615	3.0	0.662								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

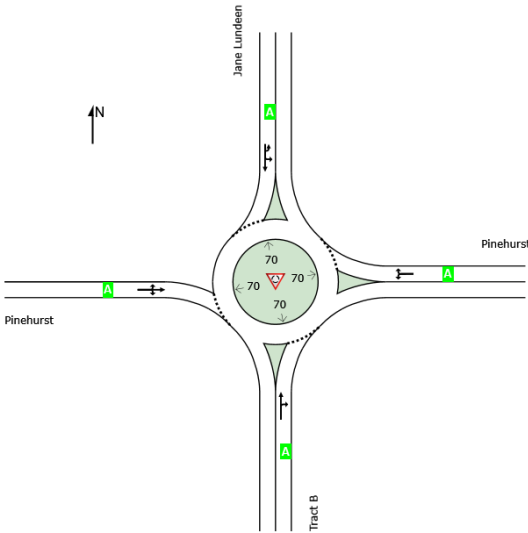

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:03:10 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (F).sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	760	0.014	100	4.9	LOS A	0.1	1.3	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.014		4.9	LOS A	0.1	1.3				
East: Pinehurst															
Lane 1 ^d	578	3.0	578	3.0	1264	0.457	100	7.1	LOS A	3.2	83.1	Full	800	0.0	0.0
Approach	578	3.0	578	3.0		0.457		7.1	LOS A	3.2	83.1				
North: Jane Lundeen															
Lane 1 ^d	342	3.0	342	3.0	1341	0.255	100	4.0	LOS A	1.4	35.8	Full	600	0.0	0.0
Approach	342	3.0	342	3.0		0.255		4.0	LOS A	1.4	35.8				
West: Pinehurst															
Lane 1 ^d	197	3.0	197	3.0	926	0.213	100	6.0	LOS A	1.0	24.4	Full	300	0.0	0.0
Approach	197	3.0	197	3.0		0.213		6.0	LOS A	1.0	24.4				
All Vehicles	1127	3.0	1127	3.0		0.457		5.9	LOS A	3.2	83.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV							
From S						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	9	1	10	3.0		760	0.014	100	NA	NA	
Approach	9	1	10	3.0			0.014				
East: Pinehurst											
Mov.	L2	R2	Total	%HV							
From E						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	S	N				veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	1	577	578	3.0		1264	0.457	100	NA	NA	
Approach	1	577	578	3.0			0.457				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV						
From N						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	18	319	5	342	3.0	1341	0.255	100	NA	NA	
Approach	18	319	5	342	3.0		0.255				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV						
From W						Cap.	Deg.	Lane	Prob.	Ov.	
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane	
							v/c	%	%	No.	
Lane 1	29	160	8	197	3.0	926	0.213	100	NA	NA	
Approach	29	160	8	197	3.0		0.213				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1127	3.0	0.457								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

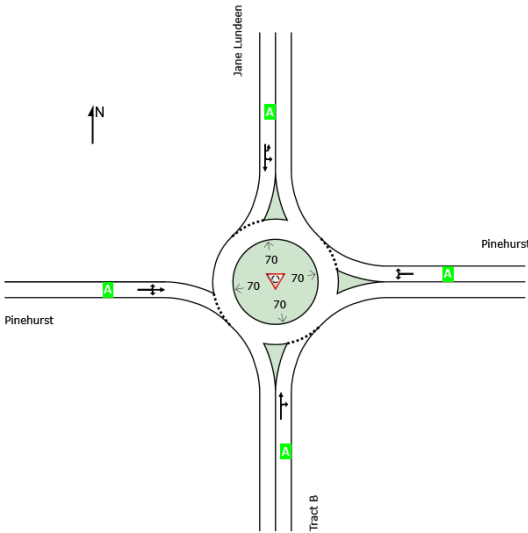

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:04:38 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Pinehurst\Models\Pinehurst + Jane Lundeen (F).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Tract B															
Lane 1 ^d	10	3.0	10	3.0	987	0.010	100	3.7	LOS A	0.0	1.0	Full	300	0.0	0.0
Approach	10	3.0	10	3.0		0.010		3.7	LOS A	0.0	1.0				
East: Pinehurst															
Lane 1 ^d	135	3.0	135	3.0	1200	0.112	100	3.9	LOS A	0.5	12.8	Full	800	0.0	0.0
Approach	135	3.0	135	3.0		0.112		3.9	LOS A	0.5	12.8				
North: Jane Lundeen															
Lane 1 ^d	139	3.0	139	3.0	1341	0.104	100	3.2	LOS A	0.5	12.1	Full	600	0.0	0.0
Approach	139	3.0	139	3.0		0.104		3.2	LOS A	0.5	12.1				
West: Pinehurst															
Lane 1 ^d	160	3.0	160	3.0	1154	0.138	100	4.3	LOS A	0.6	16.0	Full	300	0.0	0.0
Approach	160	3.0	160	3.0		0.138		4.3	LOS A	0.6	16.0				
All Vehicles	444	3.0	444	3.0		0.138		3.8	LOS A	0.6	16.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Tract B											
Mov.	T1	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From S To Exit:	N	E									
Lane 1	9	1	10	3.0		987	0.010	100	NA	NA	
Approach	9	1	10	3.0			0.010				
East: Pinehurst											
Mov.	L2	R2	Total	%HV		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From E To Exit:	S	N									
Lane 1	1	133	135	3.0		1200	0.112	100	NA	NA	
Approach	1	133	135	3.0			0.112				
North: Jane Lundeen											
Mov.	U	L2	T1	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From N To Exit:	N	E	S								
Lane 1	20	113	6	139	3.0	1341	0.104	100	NA	NA	
Approach	20	113	6	139	3.0		0.104				
West: Pinehurst											
Mov.	L2	T1	R2	Total	%HV	Cap. veh/h	Deg. Satn v/c	Lane Util. %	Prob. SL Ov. %	Ov. Lane No.	
From W To Exit:	N	E	S								
Lane 1	75	77	8	160	3.0	1154	0.138	100	NA	NA	
Approach	75	77	8	160	3.0		0.138				
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	444	3.0	0.138								

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length	Percent Opng in Lane	Opposing Flow Rate	Critical Gap	Follow-up Headway	Lane Flow Rate	Capacity	Deg. Satn	Min. Delay	Merge Delay	

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Tract B				
Lane 1	0.0	0.0	0.0	0.0
East: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Pinehurst				
Lane 1	0.0	0.0	0.0	0.0

Sidra Reports

Jane Lundeen + middle access (C, F)

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	C	A	A	A	B

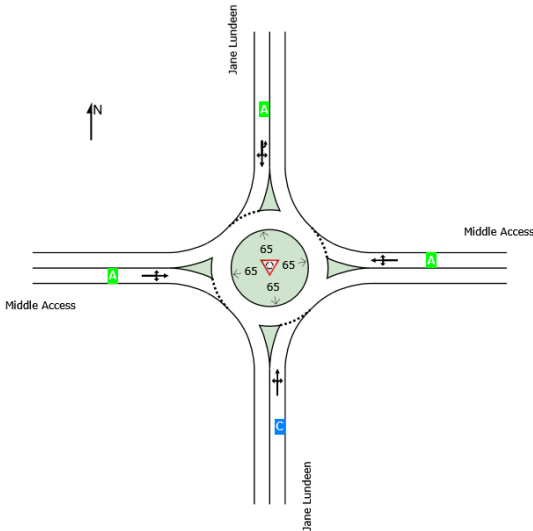

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:18:51 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Middle Access\Model\Jane Lundeen + Middle Access (C).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site AM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1 ^d	999	3.0	999	3.0	1178	0.848	100	19.4	LOS C	21.9	561.3	Full	700	0.0	0.0
Approach	999	3.0	999	3.0		0.848		19.4	LOS C	21.9	561.3				
East: Middle Access															
Lane 1 ^d	4	3.0	4	3.0	464	0.008	100	7.9	LOS A	0.0	0.7	Full	300	0.0	0.0
Approach	4	3.0	4	3.0		0.008		7.9	LOS A	0.0	0.7				
North: Jane Lundeen															
Lane 1 ^d	753	3.0	753	3.0	1335	0.564	100	6.2	LOS A	5.2	134.1	Full	800	0.0	0.0
Approach	753	3.0	753	3.0		0.564		6.2	LOS A	5.2	134.1				
West: Middle Access															
Lane 1 ^d	55	3.0	55	3.0	594	0.093	100	7.1	LOS A	0.3	8.8	Full	300	0.0	0.0
Approach	55	3.0	55	3.0		0.093		7.1	LOS A	0.3	8.8				
All Vehicles	1811	3.0	1811	3.0		0.848		13.5	LOS B	21.9	561.3				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Jane Lundeen											
Mov.	L2	T1	R2	Total	%HV						
From S							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	3	944	51	999	3.0		1178	0.848	100	NA	NA
Approach	3	944	51	999	3.0			0.848			
East: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From E							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	1	1	4	3.0		464	0.008	100	NA	NA
Approach	1	1	1	4	3.0			0.008			
North: Jane Lundeen											
Mov.	U	L2	T1	R2	Total	%HV					
From N							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	90	658	3	753	3.0	1335	0.564	100	NA	NA
Approach	1	90	658	3	753	3.0		0.564			
West: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From W							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	29	1	25	55	3.0		594	0.093	100	NA	NA
Approach	29	1	25	55	3.0			0.093			
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1811	3.0		0.848							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
East: Middle Access				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Middle Access				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2045 BG + Site School PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

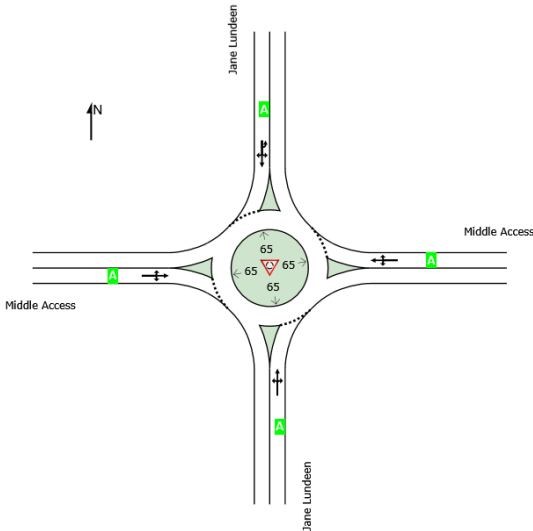

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: Jane Lundeen															
Lane 1 ^d	764	3.0	764	3.0	1314	0.582	100	7.7	LOS A	5.5	140.7	Full	700	0.0	0.0
Approach	764	3.0	764	3.0		0.582		7.7	LOS A	5.5	140.7				
East: Middle Access															
Lane 1 ^d	87	3.0	87	3.0	575	0.151	100	8.1	LOS A	0.6	14.5	Full	300	0.0	0.0
Approach	87	3.0	87	3.0		0.151		8.1	LOS A	0.6	14.5				
North: Jane Lundeen															
Lane 1 ^d	445	3.0	445	3.0	1327	0.336	100	5.0	LOS A	2.0	52.4	Full	800	0.0	0.0
Approach	445	3.0	445	3.0		0.336		5.0	LOS A	2.0	52.4				
West: Middle Access															
Lane 1 ^d	29	3.0	29	3.0	833	0.035	100	4.7	LOS A	0.1	3.5	Full	300	0.0	0.0
Approach	29	3.0	29	3.0		0.035		4.7	LOS A	0.1	3.5				
All Vehicles	1326	3.0	1326	3.0		0.582		6.7	LOS A	5.5	140.7				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Jane Lundeen											
Mov.	L2	T1	R2	Total	%HV						
From S							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	8	756	1	764	3.0		1314	0.582	100	NA	NA
Approach	8	756	1	764	3.0			0.582			
East: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From E							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	2	1	83	87	3.0		575	0.151	100	NA	NA
Approach	2	1	83	87	3.0			0.151			
North: Jane Lundeen											
Mov.	U	L2	T1	R2	Total	%HV					
From N							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	1	437	7	445	3.0	1327	0.336	100	NA	NA
Approach	1	1	437	7	445	3.0		0.336			
West: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From W							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	17	1	12	29	3.0		833	0.035	100	NA	NA
Approach	17	1	12	29	3.0			0.035			
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1326	3.0		0.582							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
East: Middle Access				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Middle Access				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

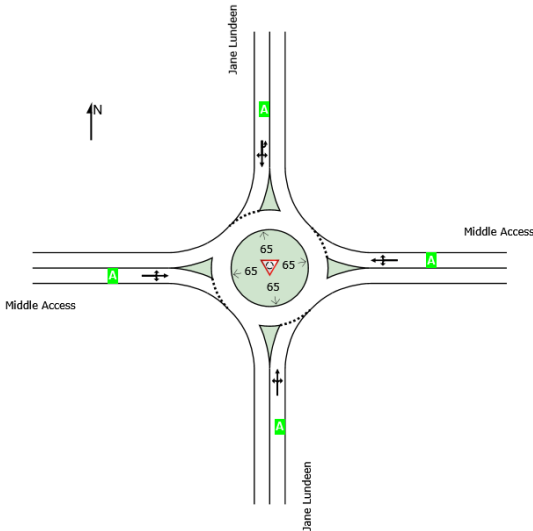

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1 ^d	379	3.0	379	3.0	1311	0.289	100	4.9	LOS A	1.6	41.9	Full	700	0.0	0.0
Approach	379	3.0	379	3.0		0.289		4.9	LOS A	1.6	41.9				
East: Middle Access															
Lane 1 ^d	38	3.0	38	3.0	887	0.043	100	4.5	LOS A	0.2	4.3	Full	300	0.0	0.0
Approach	38	3.0	38	3.0		0.043		4.5	LOS A	0.2	4.3				
North: Jane Lundeen															
Lane 1 ^d	257	3.0	257	3.0	1324	0.194	100	4.0	LOS A	1.0	25.0	Full	800	0.0	0.0
Approach	257	3.0	257	3.0		0.194		4.0	LOS A	1.0	25.0				
West: Middle Access															
Lane 1 ^d	26	3.0	26	3.0	1027	0.025	100	3.7	LOS A	0.1	2.5	Full	300	0.0	0.0
Approach	26	3.0	26	3.0		0.025		3.7	LOS A	0.1	2.5				
All Vehicles	700	3.0	700	3.0		0.289		4.5	LOS A	1.6	41.9				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Jane Lundeen											
Mov.	L2	T1	R2	Total	%HV						
From S							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	10	362	7	379	3.0		1311	0.289	100	NA	NA
Approach	10	362	7	379	3.0			0.289			
East: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From E							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	1	36	38	3.0		887	0.043	100	NA	NA
Approach	1	1	36	38	3.0			0.043			
North: Jane Lundeen											
Mov.	U	L2	T1	R2	Total	%HV					
From N							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	10	236	10	257	3.0	1324	0.194	100	NA	NA
Approach	1	10	236	10	257	3.0		0.194			
West: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From W							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	10	1	14	26	3.0		1027	0.025	100	NA	NA
Approach	10	1	14	26	3.0			0.025			
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	700	3.0		0.289							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
East: Middle Access				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Middle Access				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE


Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	C	A	A	A	B

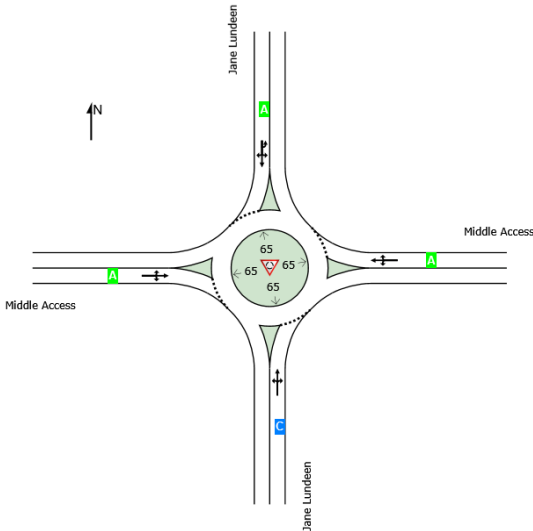

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:23:43 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Middle Access\Model\Jane Lundeen + Middle Access (F).sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1 ^d	999	3.0	999	3.0	1176	0.849	100	19.5	LOS C	22.4	573.8	Full	700	0.0	0.0
Approach	999	3.0	999	3.0		0.849		19.5	LOS C	22.4	573.8				
East: Middle Access															
Lane 1 ^d	4	3.0	4	3.0	463	0.008	100	7.9	LOS A	0.0	0.7	Full	300	0.0	0.0
Approach	4	3.0	4	3.0		0.008		7.9	LOS A	0.0	0.7				
North: Jane Lundeen															
Lane 1 ^d	754	3.0	754	3.0	1335	0.565	100	6.2	LOS A	5.3	134.5	Full	800	0.0	0.0
Approach	754	3.0	754	3.0		0.565		6.2	LOS A	5.3	134.5				
West: Middle Access															
Lane 1 ^d	57	3.0	57	3.0	594	0.095	100	7.2	LOS A	0.4	9.0	Full	300	0.0	0.0
Approach	57	3.0	57	3.0		0.095		7.2	LOS A	0.4	9.0				
All Vehicles	1813	3.0	1813	3.0		0.849		13.6	LOS B	22.4	573.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Jane Lundeen											
Mov.	L2	T1	R2	Total	%HV						
From S							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	3	944	51	999	3.0		1176	0.849	100	NA	NA
Approach	3	944	51	999	3.0			0.849			
East: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From E							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	1	1	4	3.0		463	0.008	100	NA	NA
Approach	1	1	1	4	3.0			0.008			
North: Jane Lundeen											
Mov.	U	L2	T1	R2	Total	%HV					
From N							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	90	658	4	754	3.0	1335	0.565	100	NA	NA
Approach	1	90	658	4	754	3.0		0.565			
West: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From W							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	30	1	25	57	3.0		594	0.095	100	NA	NA
Approach	30	1	25	57	3.0			0.095			
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1813	3.0		0.849							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
East: Middle Access				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Middle Access				
Lane 1	0.0	0.0	0.0	0.0

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1 ^d	764	3.0	764	3.0	1314	0.582	100	7.7	LOS A	5.5	140.7	Full	700	0.0	0.0
Approach	764	3.0	764	3.0		0.582		7.7	LOS A	5.5	140.7				
East: Middle Access															
Lane 1 ^d	87	3.0	87	3.0	575	0.151	100	8.1	LOS A	0.6	14.5	Full	300	0.0	0.0
Approach	87	3.0	87	3.0		0.151		8.1	LOS A	0.6	14.5				
North: Jane Lundeen															
Lane 1 ^d	447	3.0	447	3.0	1327	0.337	100	5.0	LOS A	2.1	52.8	Full	800	0.0	0.0
Approach	447	3.0	447	3.0		0.337		5.0	LOS A	2.1	52.8				
West: Middle Access															
Lane 1 ^d	29	3.0	29	3.0	833	0.035	100	4.7	LOS A	0.1	3.5	Full	300	0.0	0.0
Approach	29	3.0	29	3.0		0.035		4.7	LOS A	0.1	3.5				
All Vehicles	1328	3.0	1328	3.0		0.582		6.8	LOS A	5.5	140.7				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Jane Lundeen											
Mov.	L2	T1	R2	Total	%HV						
From S							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	8	756	1	764	3.0		1314	0.582	100	NA	NA
Approach	8	756	1	764	3.0			0.582			
East: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From E							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	2	1	83	87	3.0		575	0.151	100	NA	NA
Approach	2	1	83	87	3.0			0.151			
North: Jane Lundeen											
Mov.	U	L2	T1	R2	Total	%HV					
From N							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	1	437	9	447	3.0	1327	0.337	100	NA	NA
Approach	1	1	437	9	447	3.0		0.337			
West: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From W							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	17	1	12	29	3.0		833	0.035	100	NA	NA
Approach	17	1	12	29	3.0			0.035			
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	1328	3.0		0.582							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
East: Middle Access				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Middle Access				
Lane 1	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

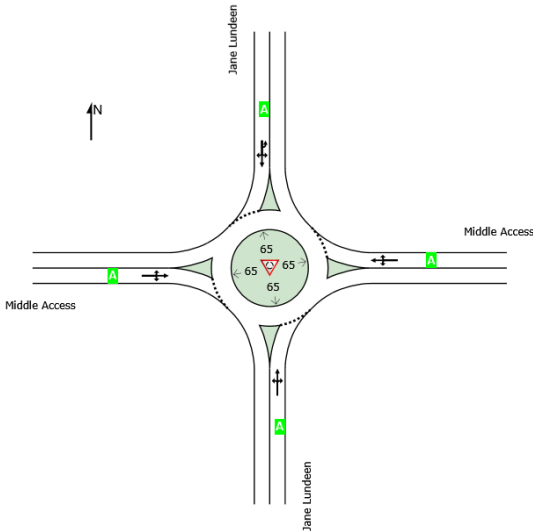

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:24:47 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Middle Access\Model\Jane Lundeen + Middle Access (F).sip9

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	A	A	A	A	A

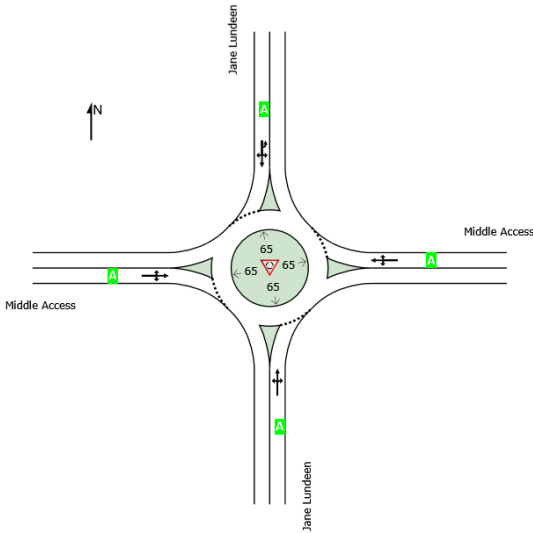

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:25:47 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\Jane Lundeen + Middle Access\Model\Jane Lundeen + Middle Access (F).sip9

LANE SUMMARY

 **Site: 101 [2045 BG + Site PM (Site Folder: General)]**

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: Jane Lundeen															
Lane 1 ^d	379	3.0	379	3.0	1309	0.289	100	4.9	LOS A	1.6	42.0	Full	700	0.0	0.0
Approach	379	3.0	379	3.0		0.289		4.9	LOS A	1.6	42.0				
East: Middle Access															
Lane 1 ^d	38	3.0	38	3.0	886	0.043	100	4.5	LOS A	0.2	4.3	Full	300	0.0	0.0
Approach	38	3.0	38	3.0		0.043		4.5	LOS A	0.2	4.3				
North: Jane Lundeen															
Lane 1 ^d	260	3.0	260	3.0	1324	0.196	100	4.0	LOS A	1.0	25.4	Full	800	0.0	0.0
Approach	260	3.0	260	3.0		0.196		4.0	LOS A	1.0	25.4				
West: Middle Access															
Lane 1 ^d	27	3.0	27	3.0	1027	0.026	100	3.7	LOS A	0.1	2.7	Full	300	0.0	0.0
Approach	27	3.0	27	3.0		0.026		3.7	LOS A	0.1	2.7				
All Vehicles	704	3.0	704	3.0		0.289		4.5	LOS A	1.6	42.0				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.
Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)											
South: Jane Lundeen											
Mov.	L2	T1	R2	Total	%HV						
From S							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	10	362	7	379	3.0		1309	0.289	100	NA	NA
Approach	10	362	7	379	3.0			0.289			
East: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From E							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	1	36	38	3.0		886	0.043	100	NA	NA
Approach	1	1	36	38	3.0			0.043			
North: Jane Lundeen											
Mov.	U	L2	T1	R2	Total	%HV					
From N							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	1	10	236	13	260	3.0	1324	0.196	100	NA	NA
Approach	1	10	236	13	260	3.0		0.196			
West: Middle Access											
Mov.	L2	T1	R2	Total	%HV						
From W							Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S				veh/h	Satn	Util.	SL Ov.	Lane
								v/c	%	%	No.
Lane 1	12	1	14	27	3.0		1027	0.026	100	NA	NA
Approach	12	1	14	27	3.0			0.026			
	Total	%HV	Deg.Satn (v/c)								
All Vehicles	704	3.0		0.289							

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit	Short	Percent	Opposing	Critical	Follow-up	Lane	Capacity	Deg.	Min.	Merge	
	Lane	Lane	Opng in	Flow Rate	Gap	Headway	Flow		Satn	Delay	Delay	
	Number	Length	Lane				Rate					

ft	%	veh/h	pcu/h	sec	sec	veh/h	veh/h	v/c	sec	sec
There are no Exit Short Lanes for Merge Analysis at this Site.										

Variable Demand Analysis				
	Initial Queued Demand	Residual Queued Demand	Time for Residual Demand to Clear	Duration of Oversatn
	veh	veh	sec	sec
South: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
East: Middle Access				
Lane 1	0.0	0.0	0.0	0.0
North: Jane Lundeen				
Lane 1	0.0	0.0	0.0	0.0
West: Middle Access				
Lane 1	0.0	0.0	0.0	0.0

Sidra Reports

SH 83 + Walker

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	B	D	C	B	C

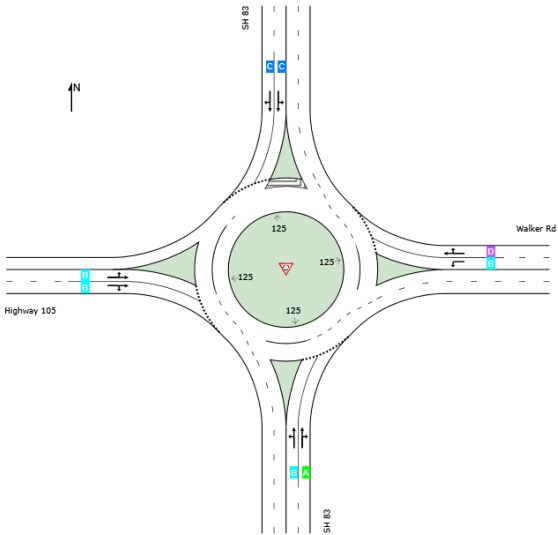

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:08:31 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\SH 83 + Walker\Models\SH 83 + Walker.sip9

LANE SUMMARY

 Site: 101 [2045 BG AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: SH 83															
Lane 1	330	3.0	330	3.0	764	0.433	100	10.3	LOS B	2.3	59.5	Full	1600	0.0	0.0
Lane 2 ^d	359	3.0	359	3.0	830	0.433	100	9.7	LOS A	2.3	58.9	Full	1600	0.0	0.0
Approach	689	3.0	689	3.0		0.433		10.0	LOS B	2.3	59.5				
East: Walker Rd															
Lane 1	296	3.0	296	3.0	679	0.435	100	11.4	LOS B	2.2	57.2	Full	570	0.0	0.0
Lane 2 ^d	648	3.0	648	3.0	744	0.871	100	31.7	LOS D	13.0	332.1	Full	1600	0.0	0.0
Approach	943	3.0	943	3.0		0.871		25.3	LOS D	13.0	332.1				
North: SH 83															
Lane 1	281	3.0	281	3.0	507	0.554	100	18.2	LOS C	2.8	72.1	Full	1600	0.0	0.0
Lane 2 ^d	281	3.0	281	3.0	507	0.554	100	18.2	LOS C	2.8	72.1	Full	1600	0.0	0.0
Approach	561	3.0	561	3.0		0.554		18.2	LOS C	2.8	72.1				
West: Highway 105															
Lane 1	294	3.0	294	3.0	608	0.484	100	13.7	LOS B	2.5	65.2	Full	1100	0.0	0.0
Lane 2 ^d	324	3.0	324	3.0	669	0.484	100	12.7	LOS B	2.6	65.4	Full	1100	0.0	0.0
Approach	618	3.0	618	3.0		0.484		13.1	LOS B	2.6	65.4				
All Vehicles	2812	3.0	2812	3.0		0.871		17.5	LOS C	13.0	332.1				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S	W	N	E			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	184	146	-	330	3.0	764	0.433	100	NA	NA
Lane 2	-	269	90	359	3.0	830	0.433	100	NA	NA
Approach	184	415	90	689	3.0		0.433			
East: Walker Rd										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From E	S	W	N			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	296	-	-	296	3.0	679	0.435	100	NA	NA
Lane 2	-	535	113	648	3.0	744	0.871	100	NA	NA
Approach	296	535	113	943	3.0		0.871			
North: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From N	E	S	W			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	132	148	-	281	3.0	507	0.554	100	NA	NA
Lane 2	-	203	77	281	3.0	507	0.554	100	NA	NA
Approach	132	352	77	561	3.0		0.554			
West: Highway 105										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W	N	E	S			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	68	226	-	294	3.0	608	0.484	100	NA	NA
Lane 2	-	124	200	324	3.0	669	0.484	100	NA	NA
Approach	68	350	200	618	3.0		0.484			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	2812	3.0	0.871

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker Rd				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
North: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
West: Highway 105				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE SUMMARY

 Site: 101 [2045 BG School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: SH 83															
Lane 1	373	3.0	373	3.0	766	0.487	100	11.4	LOS B	3.0	75.9	Full	1600	0.0	0.0
Lane 2 ^d	405	3.0	405	3.0	832	0.487	100	10.7	LOS B	3.0	75.7	Full	1600	0.0	0.0
Approach	778	3.0	778	3.0		0.487		11.1	LOS B	3.0	75.9				
East: Walker Rd															
Lane 1	338	3.0	338	3.0	683	0.494	100	12.7	LOS B	2.8	72.9	Full	570	0.0	0.0
Lane 2 ^d	535	3.0	535	3.0	747	0.715	100	19.2	LOS C	6.7	170.8	Full	1600	0.0	0.0
Approach	872	3.0	872	3.0		0.715		16.7	LOS C	6.7	170.8				
North: SH 83															
Lane 1	310	3.0	310	3.0	509	0.609	100	20.3	LOS C	3.4	86.5	Full	1600	0.0	0.0
Lane 2 ^d	310	3.0	310	3.0	509	0.609	100	20.3	LOS C	3.4	86.5	Full	1600	0.0	0.0
Approach	620	3.0	620	3.0		0.609		20.3	LOS C	3.4	86.5				
West: Highway 105															
Lane 1	320	3.0	320	3.0	549	0.583	100	18.1	LOS C	3.3	85.6	Full	1100	0.0	0.0
Lane 2 ^d	355	3.0	355	3.0	608	0.583	100	16.6	LOS C	3.4	86.7	Full	1100	0.0	0.0
Approach	675	3.0	675	3.0		0.583		17.3	LOS C	3.4	86.7				
All Vehicles	2945	3.0	2945	3.0		0.715		16.1	LOS C	6.7	170.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Sieglösch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	W	N	E			veh/h	v/c	%	%	No.
Lane 1	225	148	-	373	3.0	766	0.487	100	NA	NA
Lane 2	-	215	190	405	3.0	832	0.487	100	NA	NA
Approach	225	363	190	778	3.0		0.487			
East: Walker Rd										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From E						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	S	W	N			veh/h	v/c	%	%	No.
Lane 1	338	-	-	338	3.0	683	0.494	100	NA	NA
Lane 2	-	448	87	535	3.0	747	0.715	100	NA	NA
Approach	338	448	87	872	3.0		0.715			
North: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From N						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	E	S	W			veh/h	v/c	%	%	No.
Lane 1	100	210	-	310	3.0	509	0.609	100	NA	NA
Lane 2	-	233	77	310	3.0	509	0.609	100	NA	NA
Approach	100	443	77	620	3.0		0.609			
West: Highway 105										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W						Cap.	Satn	Util.	SL Ov.	Lane
To Exit:	N	E	S			veh/h	v/c	%	%	No.
Lane 1	74	246	-	320	3.0	549	0.583	100	NA	NA
Lane 2	-	128	227	355	3.0	608	0.583	100	NA	NA
Approach	74	374	227	675	3.0		0.583			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	2945	3.0	0.715

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker Rd				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
North: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
West: Highway 105				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG School PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	B	C	C	C	C

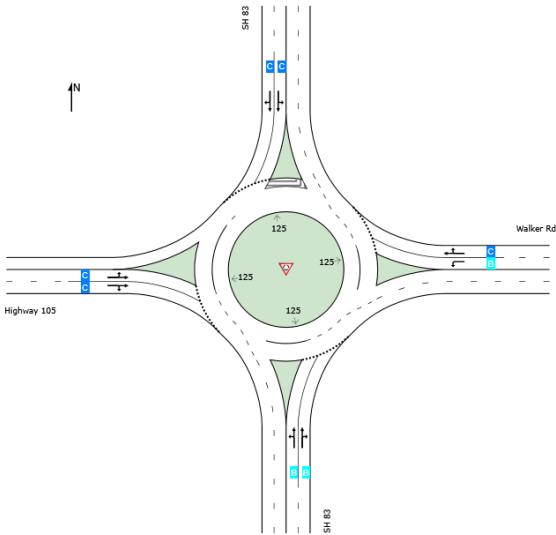

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:10:07 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\SH 83 + Walker\Models\SH 83 + Walker.sip9

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG PM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	B	C	B	B	B

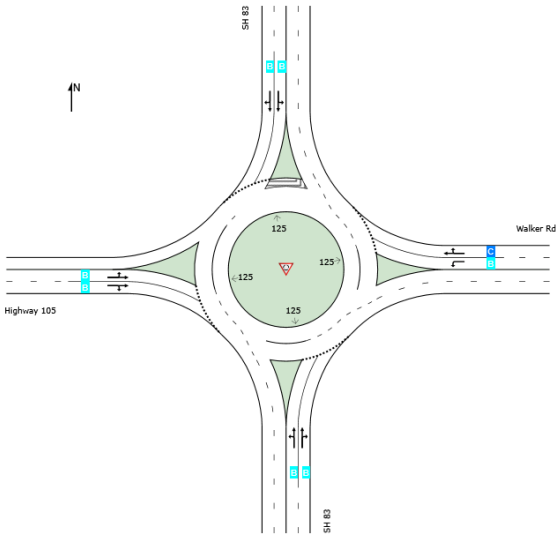

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:11:39 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\SH 83 + Walker\Models\SH 83 + Walker.sip9

LANE SUMMARY

 Site: 101 [2045 BG PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site
Site Category: (None)
Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: SH 83															
Lane 1	522	3.0	522	3.0	879	0.595	100	12.7	LOS B	5.3	135.3	Full	1600	0.0	0.0
Lane 2 ^d	563	3.0	563	3.0	946	0.595	100	12.0	LOS B	5.3	135.8	Full	1600	0.0	0.0
Approach	1085	3.0	1085	3.0		0.595		12.4	LOS B	5.3	135.8				
East: Walker Rd															
Lane 1	189	3.0	189	3.0	511	0.369	100	12.9	LOS B	1.5	38.5	Full	570	0.0	0.0
Lane 2 ^d	347	3.0	347	3.0	569	0.610	100	18.6	LOS C	3.5	89.1	Full	1600	0.0	0.0
Approach	536	3.0	536	3.0		0.610		16.6	LOS C	3.5	89.1				
North: SH 83															
Lane 1	329	3.0	329	3.0	648	0.508	100	13.6	LOS B	2.9	73.8	Full	1600	0.0	0.0
Lane 2 ^d	329	3.0	329	3.0	648	0.508	100	13.6	LOS B	2.9	73.8	Full	1600	0.0	0.0
Approach	658	3.0	658	3.0		0.508		13.6	LOS B	2.9	73.8				
West: Highway 105															
Lane 1	276	3.0	276	3.0	610	0.453	100	12.9	LOS B	2.3	58.0	Full	1100	0.0	0.0
Lane 2 ^d	304	3.0	304	3.0	672	0.453	100	11.9	LOS B	2.3	57.9	Full	1100	0.0	0.0
Approach	580	3.0	580	3.0		0.453		12.4	LOS B	2.3	58.0				
All Vehicles	2860	3.0	2860	3.0		0.610		13.4	LOS B	5.3	135.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).
Roundabout LOS Method: Same as Sign Control.
Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.
LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).
Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).
Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: SH 83										
Mov.	L2	T1	R2	Total	%HV					
From S						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	W	N	E			veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	294	228	-	522	3.0	879	0.595	100	NA	NA
Lane 2	-	365	198	563	3.0	946	0.595	100	NA	NA
Approach	294	593	198	1085	3.0		0.595			
East: Walker Rd										
Mov.	L2	T1	R2	Total	%HV					
From E						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	S	W	N			veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	189	-	-	189	3.0	511	0.369	100	NA	NA
Lane 2	-	286	61	347	3.0	569	0.610	100	NA	NA
Approach	189	286	61	536	3.0		0.610			
North: SH 83										
Mov.	L2	T1	R2	Total	%HV					
From N						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	E	S	W			veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	64	265	-	329	3.0	648	0.508	100	NA	NA
Lane 2	-	258	71	329	3.0	648	0.508	100	NA	NA
Approach	64	523	71	658	3.0		0.508			
West: Highway 105										
Mov.	L2	T1	R2	Total	%HV					
From W						Cap.	Deg.	Lane	Prob.	Ov.
To Exit:	N	E	S			veh/h	Satn	Util.	SL Ov.	Lane
							v/c	%	%	No.
Lane 1	64	213	-	276	3.0	610	0.453	100	NA	NA
Lane 2	-	69	235	304	3.0	672	0.453	100	NA	NA
Approach	64	282	235	580	3.0		0.453			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	2860	3.0	0.610

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker Rd				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
North: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
West: Highway 105				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site AM (Site Folder: General)]


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	B	D	C	B	C

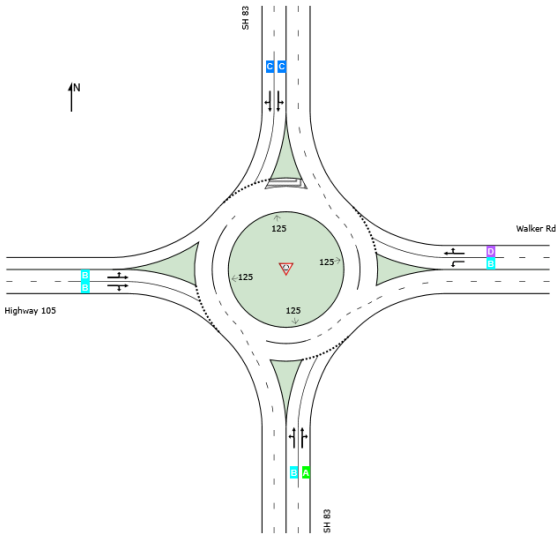

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:12:57 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\SH 83 + Walker\Models\SH 83 + Walker.sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site AM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft	Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %	
South: SH 83															
Lane 1	331	3.0	331	3.0	758	0.437	100	10.5	LOS B	2.4	60.6	Full	1600	0.0	0.0
Lane 2 ^d	360	3.0	360	3.0	824	0.437	100	9.8	LOS A	2.3	60.0	Full	1600	0.0	0.0
Approach	691	3.0	691	3.0		0.437		10.1	LOS B	2.4	60.6				
East: Walker Rd															
Lane 1	319	3.0	319	3.0	679	0.470	100	12.2	LOS B	2.6	66.0	Full	570	0.0	0.0
Lane 2 ^d	658	3.0	658	3.0	744	0.884	100	33.4	LOS D	13.9	354.6	Full	1600	0.0	0.0
Approach	977	3.0	977	3.0		0.884		26.4	LOS D	13.9	354.6				
North: SH 83															
Lane 1	281	3.0	281	3.0	490	0.574	100	19.5	LOS C	2.9	74.9	Full	1600	0.0	0.0
Lane 2 ^d	281	3.0	281	3.0	490	0.574	100	19.5	LOS C	2.9	74.9	Full	1600	0.0	0.0
Approach	562	3.0	562	3.0		0.574		19.5	LOS C	2.9	74.9				
West: Highway 105															
Lane 1	297	3.0	297	3.0	593	0.501	100	14.4	LOS B	2.7	68.2	Full	1100	0.0	0.0
Lane 2 ^d	328	3.0	328	3.0	654	0.501	100	13.3	LOS B	2.7	68.5	Full	1100	0.0	0.0
Approach	624	3.0	624	3.0		0.501		13.8	LOS B	2.7	68.5				
All Vehicles	2855	3.0	2855	3.0		0.884		18.4	LOS C	13.9	354.6				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
 Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
 Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
 HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
 Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S	W	N	E			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	184	147	-	331	3.0	758	0.437	100	NA	NA
Lane 2	-	268	92	360	3.0	824	0.437	100	NA	NA
Approach	184	415	92	691	3.0		0.437			
East: Walker Rd										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From E	S	W	N			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	319	-	-	319	3.0	679	0.470	100	NA	NA
Lane 2	-	544	114	658	3.0	744	0.884	100	NA	NA
Approach	319	544	114	977	3.0		0.884			
North: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From N	E	S	W			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	133	148	-	281	3.0	490	0.574	100	NA	NA
Lane 2	-	204	77	281	3.0	490	0.574	100	NA	NA
Approach	133	352	77	562	3.0		0.574			
West: Highway 105										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W	N	E	S			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	68	228	-	297	3.0	593	0.501	100	NA	NA
Lane 2	-	128	200	328	3.0	654	0.501	100	NA	NA
Approach	68	356	200	624	3.0		0.501			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	2855	3.0	0.884

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker Rd				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
North: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
West: Highway 105				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 **Site: 101 [2045 BG + Site School PM (Site Folder: General)]**


Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	B	C	C	C	C

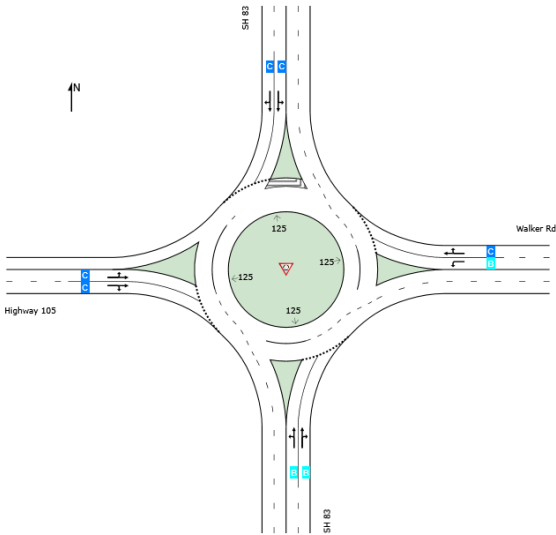

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:14:15 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\SH 83 + Walker\Models\SH 83 + Walker.sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site School PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: SH 83															
Lane 1	374	3.0	374	3.0	751	0.498	100	11.8	LOS B	3.1	78.5	Full	1600	0.0	0.0
Lane 2 ^d	407	3.0	407	3.0	817	0.498	100	11.1	LOS B	3.1	78.5	Full	1600	0.0	0.0
Approach	781	3.0	781	3.0		0.498		11.5	LOS B	3.1	78.5				
East: Walker Rd															
Lane 1	351	3.0	351	3.0	684	0.513	100	13.1	LOS B	3.1	78.3	Full	570	0.0	0.0
Lane 2 ^d	543	3.0	543	3.0	748	0.726	100	19.8	LOS C	6.9	177.8	Full	1600	0.0	0.0
Approach	893	3.0	893	3.0		0.726		17.2	LOS C	6.9	177.8				
North: SH 83															
Lane 1	311	3.0	311	3.0	500	0.623	100	21.2	LOS C	3.5	89.1	Full	1600	0.0	0.0
Lane 2 ^d	311	3.0	311	3.0	500	0.623	100	21.2	LOS C	3.5	89.1	Full	1600	0.0	0.0
Approach	623	3.0	623	3.0		0.623		21.2	LOS C	3.5	89.1				
West: Highway 105															
Lane 1	327	3.0	327	3.0	540	0.606	100	19.2	LOS C	3.6	91.2	Full	1100	0.0	0.0
Lane 2 ^d	363	3.0	363	3.0	599	0.606	100	17.7	LOS C	3.6	92.6	Full	1100	0.0	0.0
Approach	691	3.0	691	3.0		0.606		18.4	LOS C	3.6	92.6				
All Vehicles	2988	3.0	2988	3.0		0.726		16.8	LOS C	6.9	177.8				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S	W	N	E			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	225	149	-	374	3.0	751	0.498	100	NA	NA
Lane 2	-	213	194	407	3.0	817	0.498	100	NA	NA
Approach	225	362	194	781	3.0		0.498			
East: Walker Rd										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From E	S	W	N			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	351	-	-	351	3.0	684	0.513	100	NA	NA
Lane 2	-	452	90	543	3.0	748	0.726	100	NA	NA
Approach	351	452	90	893	3.0		0.726			
North: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From N	E	S	W			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	103	209	-	311	3.0	500	0.623	100	NA	NA
Lane 2	-	234	77	311	3.0	500	0.623	100	NA	NA
Approach	103	443	77	623	3.0		0.623			
West: Highway 105										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W	N	E	S			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	74	253	-	327	3.0	540	0.606	100	NA	NA
Lane 2	-	136	227	363	3.0	599	0.606	100	NA	NA
Approach	74	390	227	691	3.0		0.606			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	2988	3.0	0.726

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker Rd				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
North: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
West: Highway 105				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

LANE LEVEL OF SERVICE

Lane Level of Service

 Site: 101 [2045 BG + Site PM (Site Folder: General)]


Output produced by **SIDRA INTERSECTION** Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

	Approaches				Intersection
	South	East	North	West	
LOS	B	C	B	B	B

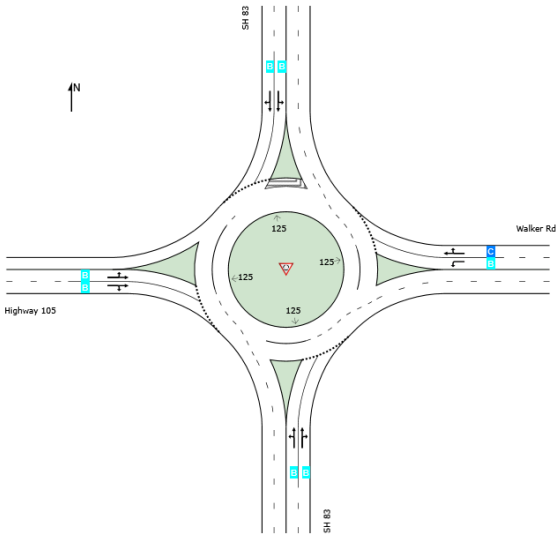

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).

SIDRA INTERSECTION 9.1 | Copyright © 2000-2024 Akcelik and Associates Pty Ltd | [sidrasolutions.com](https://www.sidrasolutions.com)

Organisation: LSC TRANSPORTATION CONSULTANTS, INC. | Licence: PLUS / 1PC | Processed: Friday, August 14, 2026 10:15:19 AM

Project: G:\Shared drives\CS - 2020-current\2025\S254260 - Mon Acad S Residential\Sidra\2026-08-August\SH 83 + Walker\Models\SH 83 + Walker.sip9

LANE SUMMARY

 Site: 101 [2045 BG + Site PM (Site Folder: General)]

Output produced by SIDRA INTERSECTION Version: 9.1.6.228

New Site

Site Category: (None)

Roundabout

Lane Use and Performance															
	Demand Flows [Total HV] veh/h %		Arrival Flows [Total HV] veh/h %		Cap. veh/h	Deg. Satn v/c	Lane Util. %	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh Dist] ft		Lane Config	Lane Length ft	Cap. Adj. %	Prob. Block. %
South: SH 83															
Lane 1	526	3.0	526	3.0	875	0.601	100	12.9	LOS B	5.4	138.8	Full	1600	0.0	0.0
Lane 2 ^d	567	3.0	567	3.0	943	0.601	100	12.2	LOS B	5.5	139.5	Full	1600	0.0	0.0
Approach	1093	3.0	1093	3.0		0.601		12.6	LOS B	5.5	139.5				
East: Walker Rd															
Lane 1	210	3.0	210	3.0	492	0.427	100	14.7	LOS B	1.8	47.0	Full	570	0.0	0.0
Lane 2 ^d	364	3.0	364	3.0	549	0.662	100	21.5	LOS C	4.0	102.6	Full	1600	0.0	0.0
Approach	574	3.0	574	3.0		0.662		19.0	LOS C	4.0	102.6				
North: SH 83															
Lane 1	331	3.0	331	3.0	626	0.528	100	14.5	LOS B	3.0	77.4	Full	1600	0.0	0.0
Lane 2 ^d	331	3.0	331	3.0	626	0.528	100	14.5	LOS B	3.0	77.4	Full	1600	0.0	0.0
Approach	661	3.0	661	3.0		0.528		14.5	LOS B	3.0	77.4				
West: Highway 105															
Lane 1	259	3.0	259	3.0	595	0.436	100	12.7	LOS B	2.1	53.6	Full	1100	0.0	0.0
Lane 2 ^d	286	3.0	286	3.0	656	0.436	100	11.8	LOS B	2.1	53.5	Full	1100	0.0	0.0
Approach	546	3.0	546	3.0		0.436		12.2	LOS B	2.1	53.6				
All Vehicles	2874	3.0	2874	3.0		0.662		14.2	LOS B	5.5	139.5				

Site Level of Service (LOS) Method: Delay & v/c (HCM 6). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Roundabout LOS Method: Same as Sign Control.

Lane LOS values are based on average delay and v/c ratio (degree of saturation) per lane.

LOS F will result if v/c > 1 irrespective of lane delay value (does not apply for approaches and intersection).

Intersection and Approach LOS values are based on average delay for all lanes (v/c not used as specified in HCM 6).

Roundabout Capacity Model: US HCM 6.

Delay Model: HCM Delay Formula (Stopline Delay: Geometric Delay is not included).
 Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.
 Gap-Acceptance Capacity Formula: Siegloch M1 implied by US HCM 6 Roundabout Capacity Model.
 HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.
 Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

d Dominant lane on roundabout approach

Approach Lane Flows (veh/h)										
South: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From S	W	N	E			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	294	232	-	526	3.0	875	0.601	100	NA	NA
Lane 2	-	361	205	567	3.0	943	0.601	100	NA	NA
Approach	294	593	205	1093	3.0		0.601			
East: Walker Rd										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From E	S	W	N			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	210	-	-	210	3.0	492	0.427	100	NA	NA
Lane 2	-	299	65	364	3.0	549	0.662	100	NA	NA
Approach	210	299	65	574	3.0		0.662			
North: SH 83										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From N	E	S	W			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	67	263	-	331	3.0	626	0.528	100	NA	NA
Lane 2	-	260	71	331	3.0	626	0.528	100	NA	NA
Approach	67	523	71	661	3.0		0.528			
West: Highway 105										
Mov.	L2	T1	R2	Total	%HV		Deg.	Lane	Prob.	Ov.
From W	N	E	S			Cap.	Satn	Util.	SL Ov.	Lane
To Exit:						veh/h	v/c	%	%	No.
Lane 1	101	158	-	259	3.0	595	0.436	100	NA	NA
Lane 2	-	86	200	286	3.0	656	0.436	100	NA	NA
Approach	101	245	200	546	3.0		0.436			

	Total	%HV	Deg.Satn (v/c)
All Vehicles	2874	3.0	0.662

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

Merge Analysis												
	Exit Lane Number	Short Lane Length ft	Percent Opng in Lane %	Opposing Flow Rate veh/h	pcu/h	Critical Gap sec	Follow-up Headway sec	Lane Flow Rate veh/h	Capacity veh/h	Deg. Satn v/c	Min. Delay sec	Merge Delay sec
There are no Exit Short Lanes for Merge Analysis at this Site.												

Variable Demand Analysis				
	Initial Queued Demand veh	Residual Queued Demand veh	Time for Residual Demand to Clear sec	Duration of Oversatn sec
South: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
East: Walker Rd				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
North: SH 83				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0
West: Highway 105				
Lane 1	0.0	0.0	0.0	0.0
Lane 2	0.0	0.0	0.0	0.0

SimTraffic Queuing Reports

State Highway 83 + Highway 105/Walker Short-Term Total + Long-Term Total

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	61	133	124	197	71	131	50	147
Average Queue (ft)	23	82	79	127	42	81	21	87
95th Queue (ft)	65	146	133	216	75	141	50	158
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	56	103	102	234	80	142	59	122
Average Queue (ft)	22	69	69	131	45	79	32	72
95th Queue (ft)	57	126	106	231	90	151	66	147
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	51	204	528	558	97	173	90	148
Average Queue (ft)	29	130	256	397	58	114	48	95
95th Queue (ft)	59	208	625	689	106	193	91	169
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)			13	17				
Queuing Penalty (veh)			64	87				
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	37	160	353	510	85	137	56	117
Average Queue (ft)	20	77	143	252	50	89	28	83
95th Queue (ft)	43	159	374	506	96	149	61	130
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)			2	2				
Queuing Penalty (veh)			4	3				
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	77	204	528	570	106	184	93	185
Average Queue (ft)	24	90	137	227	49	91	32	84
95th Queue (ft)	57	171	389	501	93	163	71	153
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)			4	5				
Queuing Penalty (veh)			17	23				
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	EB	EB	WB	WB	NB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	R	L	T
Maximum Queue (ft)	67	161	119	136	104	106	11	26	199
Average Queue (ft)	33	89	69	81	50	65	2	9	119
95th Queue (ft)	80	165	119	141	99	113	17	29	208
Link Distance (ft)		698	566	566		765			528
Upstream Blk Time (%)									
Queuing Penalty (veh)									
Storage Bay Dist (ft)	265				455		400	435	
Storage Blk Time (%)									
Queuing Penalty (veh)									

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	EB	EB	WB	WB	NB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	R	L	T
Maximum Queue (ft)	63	181	148	361	126	120	32	86	215
Average Queue (ft)	32	107	106	210	66	72	5	32	140
95th Queue (ft)	66	189	163	371	121	132	29	82	258
Link Distance (ft)		698	566	566		765			528
Upstream Blk Time (%)									
Queuing Penalty (veh)									
Storage Bay Dist (ft)	265				455		400	435	
Storage Blk Time (%)									
Queuing Penalty (veh)									

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	49	144	153	290	80	145	46	201
Average Queue (ft)	25	99	85	125	46	76	20	130
95th Queue (ft)	62	161	150	259	86	143	48	210
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	52	136	138	139	111	119	46	175
Average Queue (ft)	25	94	85	86	58	73	19	105
95th Queue (ft)	58	144	139	149	105	130	52	186
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	EB	EB	WB	WB	NB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	R	L	T
Maximum Queue (ft)	84	190	164	363	143	154	43	90	238
Average Queue (ft)	29	97	86	126	55	71	2	20	123
95th Queue (ft)	67	167	147	267	105	130	16	57	219
Link Distance (ft)		698	566	566		765			528
Upstream Blk Time (%)									
Queuing Penalty (veh)									
Storage Bay Dist (ft)	265				455		400	435	
Storage Blk Time (%)									
Queuing Penalty (veh)									

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	58	80	56	88	67	106	40	137
Average Queue (ft)	32	43	26	57	37	68	18	85
95th Queue (ft)	65	97	59	102	73	114	47	153
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	64	73	42	133	76	96	31	171
Average Queue (ft)	32	38	18	68	44	55	15	92
95th Queue (ft)	73	79	48	126	77	101	40	188
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	64	80	68	118	92	156	41	235
Average Queue (ft)	37	51	34	65	58	101	12	134
95th Queue (ft)	67	91	70	119	100	170	42	239
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	67	90	46	141	80	141	30	180
Average Queue (ft)	32	48	20	67	41	67	11	111
95th Queue (ft)	65	88	48	129	82	146	31	182
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	EB	EB	WB	WB	NB	NB	SB	SB
Directions Served	L	T	L	TR	L	T	L	T
Maximum Queue (ft)	77	105	69	158	102	170	58	235
Average Queue (ft)	33	45	25	64	45	73	14	105
95th Queue (ft)	68	90	58	120	85	141	40	198
Link Distance (ft)		698	566	566		765		528
Upstream Blk Time (%)								
Queuing Penalty (veh)								
Storage Bay Dist (ft)	265				455		435	
Storage Blk Time (%)								
Queuing Penalty (veh)								

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	SB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	L	T	T
Maximum Queue (ft)	80	122	129	171	140	147	111	106	100	55	146	101
Average Queue (ft)	42	73	81	114	90	98	68	62	49	32	89	49
95th Queue (ft)	87	133	135	178	146	153	116	100	96	57	154	115
Link Distance (ft)		684	684	554	554	554		753	753		514	514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			435		
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	SB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	L	T	T
Maximum Queue (ft)	70	120	113	184	114	134	95	98	98	77	146	93
Average Queue (ft)	38	81	63	110	76	81	56	68	52	43	89	41
95th Queue (ft)	71	132	116	183	122	139	97	106	100	81	151	99
Link Distance (ft)		684	684	554	554	554		753	753		514	514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			435		
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	76	168	210	279	222	237	125	128	119	48	101	144
Average Queue (ft)	38	83	143	182	145	168	81	89	82	7	61	89
95th Queue (ft)	75	171	224	325	226	251	132	142	131	39	102	145
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	SB
Directions Served	T
Maximum Queue (ft)	121
Average Queue (ft)	54
95th Queue (ft)	115
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	SB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	L	T	T
Maximum Queue (ft)	58	107	136	204	136	174	106	99	89	76	137	105
Average Queue (ft)	31	75	79	125	93	102	57	66	54	46	97	52
95th Queue (ft)	62	124	139	197	150	178	107	110	102	94	149	111
Link Distance (ft)		684	684	554	554	554		753	753		514	514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			435		
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	88	175	210	287	222	237	133	136	127	48	106	159
Average Queue (ft)	37	78	92	133	101	112	65	71	59	2	45	91
95th Queue (ft)	75	142	172	238	176	200	116	118	112	19	88	150
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265							455			400	435
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	SB
Directions Served	T
Maximum Queue (ft)	123
Average Queue (ft)	49
95th Queue (ft)	111
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	72	190	176	188	126	152	145	122	104	11	68	177
Average Queue (ft)	45	131	80	121	78	94	87	84	64	2	31	124
95th Queue (ft)	81	197	163	189	129	165	138	128	116	16	66	185
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	SB
Directions Served	T
Maximum Queue (ft)	140
Average Queue (ft)	81
95th Queue (ft)	149
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	77	155	134	271	166	196	166	135	105	43	70	204
Average Queue (ft)	39	115	82	169	108	131	109	88	68	8	37	140
95th Queue (ft)	78	171	149	292	173	199	172	137	115	39	77	210
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	SB
Directions Served	T
Maximum Queue (ft)	188
Average Queue (ft)	114
95th Queue (ft)	199
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	79	163	125	262	158	182	156	121	99	26	63	209
Average Queue (ft)	36	123	73	179	90	104	99	75	60	5	32	128
95th Queue (ft)	81	181	139	313	158	201	169	117	112	32	67	199
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455				400	435
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	SB
Directions Served	T
Maximum Queue (ft)	183
Average Queue (ft)	93
95th Queue (ft)	175
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	81	178	155	199	120	137	157	113	114	20	50	192
Average Queue (ft)	40	126	92	134	79	82	97	66	56	3	28	123
95th Queue (ft)	82	191	163	207	132	143	166	112	114	22	61	197
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	SB
Directions Served	T
Maximum Queue (ft)	144
Average Queue (ft)	87
95th Queue (ft)	158
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	95	199	183	296	177	203	175	148	128	58	76	232
Average Queue (ft)	40	124	81	151	89	103	98	78	62	4	32	129
95th Queue (ft)	81	186	155	262	152	184	163	126	115	28	68	199
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	SB
Directions Served	T
Maximum Queue (ft)	217
Average Queue (ft)	94
95th Queue (ft)	173
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #1

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	SB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	L	T	T
Maximum Queue (ft)	106	136	99	140	111	108	93	84	74	41	146	114
Average Queue (ft)	52	87	28	89	76	67	47	49	41	21	94	64
95th Queue (ft)	97	148	74	142	117	110	90	87	82	48	154	130
Link Distance (ft)		684	684	554	554	554		753	753		514	514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			435		
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	84	138	100	177	117	154	64	92	77	10	50	139
Average Queue (ft)	45	88	36	98	76	85	39	60	48	1	26	83
95th Queue (ft)	91	147	96	179	120	160	67	97	87	15	56	138
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #2

Movement	SB
Directions Served	T
Maximum Queue (ft)	94
Average Queue (ft)	40
95th Queue (ft)	94
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 1: SH 83 & Walker Rd, Interval #3

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	SB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	L	T	T
Maximum Queue (ft)	97	147	101	170	155	185	200	105	110	54	168	139
Average Queue (ft)	65	94	40	99	97	115	120	68	60	29	109	68
95th Queue (ft)	105	160	112	164	164	200	210	119	116	61	174	133
Link Distance (ft)		684	684	554	554	554		753	753		514	514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			435		
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, Interval #4

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	SB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	L	T	T
Maximum Queue (ft)	93	170	121	177	123	154	116	94	88	50	138	99
Average Queue (ft)	48	96	49	107	88	90	48	57	47	21	91	60
95th Queue (ft)	98	180	124	185	128	160	108	96	89	52	149	122
Link Distance (ft)		684	684	554	554	554		753	753		514	514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			435		
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	EB	EB	EB	WB	WB	WB	NB	NB	NB	NB	SB	SB
Directions Served	L	T	T	L	T	TR	L	T	T	R	L	T
Maximum Queue (ft)	118	177	162	208	163	198	209	115	117	10	72	168
Average Queue (ft)	53	91	38	98	84	89	64	59	49	0	24	94
95th Queue (ft)	100	160	104	169	136	165	144	101	95	7	55	156
Link Distance (ft)		684	684	554	554	554		753	753			514
Upstream Blk Time (%)												
Queuing Penalty (veh)												
Storage Bay Dist (ft)	265						455			400	435	
Storage Blk Time (%)												
Queuing Penalty (veh)												

Intersection: 1: SH 83 & Walker Rd, All Intervals

Movement	SB
Directions Served	T
Maximum Queue (ft)	150
Average Queue (ft)	58
95th Queue (ft)	122
Link Distance (ft)	514
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	