



**Planning and Community
Development Department**
2880 International Circle
Colorado Springs, Colorado 80910
Phone: 719.520.6300
Fax: 719.520.6695
Website www.elpasoco.com

DEVIATION REQUEST AND DECISION FORM

Updated: 6/26/2019

PROJECT INFORMATION

Project Name : Trails at Aspen Ridge Filing No. 2
Schedule No.(s) : 5500000412
Legal Description : Unplatted Land

APPLICANT INFORMATION

Company : COLA, LLC
Name : Tim Buschar
 Owner Consultant Contractor
Mailing Address : 555 Middle Creek Pkwy, Suite 380
Colorado Springs, CO 80921

Phone Number : (719) 382-9433
FAX Number :
Email Address :

ENGINEER INFORMATION

Company : Matrix Design Group
Name : Nicole Schanel Colorado P.E. Number : 52434
Mailing Address : 2435 Research Parkway, Suite 300
Colorado Springs, CO 80920

Phone Number : 719-575-0100
FAX Number :
Email Address : Nicole_schanel@matrixdesigngroup.com

OWNER, APPLICANT, AND ENGINEER DECLARATION

To the best of my knowledge, the information on this application and all additional or supplemental documentation is true, factual and complete. I am fully aware that any misrepresentation of any information on this application may be grounds for denial. I have familiarized myself with the rules, regulations and procedures with respect to preparing and filing this application. I also understand that an incorrect submittal will be cause to have the project removed from the agenda of the Planning Commission, Board of County Commissioners and/or Board of Adjustment or delay review until corrections are made, and that any approval of this application is based on the representations made in the application and may be revoked on any breach of representation or condition(s) of approval.

Tim Buschar

Signature of owner (or authorized representative)

4/15/20

Date

Engineer's Seal, Signature
And Date of Signature



DEVIATION REQUEST (Attach diagrams, figures, and other documentation to clarify request)

A deviation from the standards of or in **Section 2.3.4** of the Engineering Criteria Manual (ECM) is requested.

Identify the specific ECM standard which a deviation is requested:

Per Section 2.3.4.A.2 "Table 2-14 and Figure 2-20 show the required lengths of sag vertical curves for different algebraic differences in grade to provide required stopping sight distances for each design speed."
Per Table 2-14. Design Controls for Stopping Distance on Sag Vertical Curves, the minimum Rate of Vertical Curvature, K has a minimum design value of 26 for a design speed of 25 mph.

State the reason for the requested deviation:

A k-value lower than the standard is necessary in order to meet the cross-slope of the intersecting street as well as create a low point for drainage flows.

Explain the proposed alternative and compare to the ECM standards (May provide applicable regional or national standards used as basis):

Designing the vertical curves using the standard minimum k-value would result in much longer vertical curves and increased slopes for the longitudinal roads. Road design using a lower k-value allows for less steep roadways due to smaller vertical curve lengths. In addition, this design creates a true low point with sufficient depth capacity in order to capture the longitudinal roadway flows before they reach the intersecting street, keeping the road design consistent with the drainage patterns represented in the MDDP and Final Drainage report for the site.

LIMITS OF CONSIDERATION

(At least one of the conditions listed below must be met for this deviation request to be considered.)

- The ECM standard is inapplicable to the particular situation.
- Topography, right-of-way, or other geographical conditions or impediments impose an undue hardship and an equivalent alternative that can accomplish the same design objective is available and does not compromise public safety or accessibility.
- A change to a standard is required to address a specific design or construction problem, and if not modified, the standard will impose an undue hardship on the applicant with little or no material benefit to the public.

Provide justification:

Meeting the 2% cross slope of the through road in conjunction with the longitudinal slope of the stop condition road, the minimum K-value for a sag curve per the ECM would require a vertical curve distance greater than the site constraints allow in order to capture drainage in the low point.

A lower K value than the design minimum is allowable given the stop conditions present at the deviation intersections. The horizontal distance for these intersections designed does not negatively impact the driving conditions at the intersections.

CRITERIA FOR APPROVAL

Per ECM section 5.8.7 the request for a deviation may be considered if the request is **not based exclusively on financial considerations**. The deviation must not be detrimental to public safety or surrounding property. The applicant must include supporting information demonstrating compliance with **all of the following criteria**:

The deviation will achieve the intended result with a comparable or superior design and quality of improvement.

Per Section 5.8 of the ECM, "*Section 5.8 of the ECM establishes a mechanism whereby an engineering design standard can be modified when if strictly adhered to, would cause unnecessary hardship or unsafe design because of topographical or other conditions particular to the site, and that a departure may be made without destroying the intent of such provision*"

The design revision provides a superior design to the roadway and enables the storm drain to system to function as intended.

The deviation will not adversely affect safety or operations.

Due to the stop condition of the roads, drivers will already be slowing to a lower speed. Therefore, the required stopping sight distance is diminished.

The deviation will not adversely affect maintenance and its associated cost.

The roadways with the requested deviations will be built in conformance with all other roadway design criteria and will not affect maintenance nor costs.

The deviation will not adversely affect aesthetic appearance.

The reduction of vertical length will not have an affect on aesthetic appearance of the roadways.

The deviation meets the design intent and purpose of the ECM standards.

The intent and purpose of the k-value in a sag vertical curve is to ensure that the driver has adequate stop distance. Due to the stop condition of the roadways, drivers will already be decreasing speed allowing the lower k-value to provide the required stop distance.

The deviation meets the control measure requirements of Part I.E.3 and Part I.E.4 of the County's MS4 permit, as applicable.

The proposed deviation is in conformance with Part I.E.3 and Part I.E.4 of the County's MS4 permit.

REVIEW AND RECOMMENDATION:

Approved by the ECM Administrator

This request has been determined to have met the criteria for approval. A deviation from Section 2.3.4 of the ECM is hereby granted based on the justification provided.

┌



└

Denied by the ECM Administrator

This request has been determined not to have met criteria for approval. A deviation from Section _____ of the ECM is hereby denied.

┌

┌

└

└

ECM ADMINISTRATOR COMMENTS/CONDITIONS:

Approval of this deviation does not constitute approval of the configuration of the pedestrian ramps as shown on the exhibit.

1.1. PURPOSE

The purpose of this resource is to provide a form for documenting the findings and decision by the ECM Administrator concerning a deviation request. The form is used to document the review and decision concerning a requested deviation. The request and decision concerning each deviation from a specific section of the ECM shall be recorded on a separate form.

1.2. BACKGROUND

A deviation is a critical aspect of the review process and needs to be documented to ensure that the deviations granted are applied to a specific development application in conformance with the criteria for approval and that the action is documented as such requests can point to potential needed revisions to the ECM.

1.3. APPLICABLE STATUTES AND REGULATIONS

Section 5.8 of the ECM establishes a mechanism whereby an engineering design standard can be modified when if strictly adhered to, would cause unnecessary hardship or unsafe design because of topographical or other conditions particular to the site, and that a departure may be made without destroying the intent of such provision.

1.4. APPLICABILITY

All provisions of the ECM are subject to deviation by the ECM Administrator provided that one of the following conditions is met:

- The ECM standard is inapplicable to a particular situation.
- Topography, right-of-way, or other geographical conditions or impediments impose an undue hardship on the applicant, and an equivalent alternative that can accomplish the same design objective is available and does not compromise public safety or accessibility.
- A change to a standard is required to address a specific design or construction problem, and if not modified, the standard will impose an undue hardship on the applicant with little or no material benefit to the public.

1.5. TECHNICAL GUIDANCE



The review shall ensure all criteria for approval are adequately considered and that justification for the deviation is properly documented.

1.6. LIMITS OF APPROVAL



Whether a request for deviation is approved as proposed or with conditions, the approval is for project-specific use and shall not constitute a precedent or general deviation from these Standards.

1.7. REVIEW FEES

A Deviation Review Fee shall be paid in full at the time of submission of a request for deviation. The fee for Deviation Review shall be as determined by resolution of the BoCC.


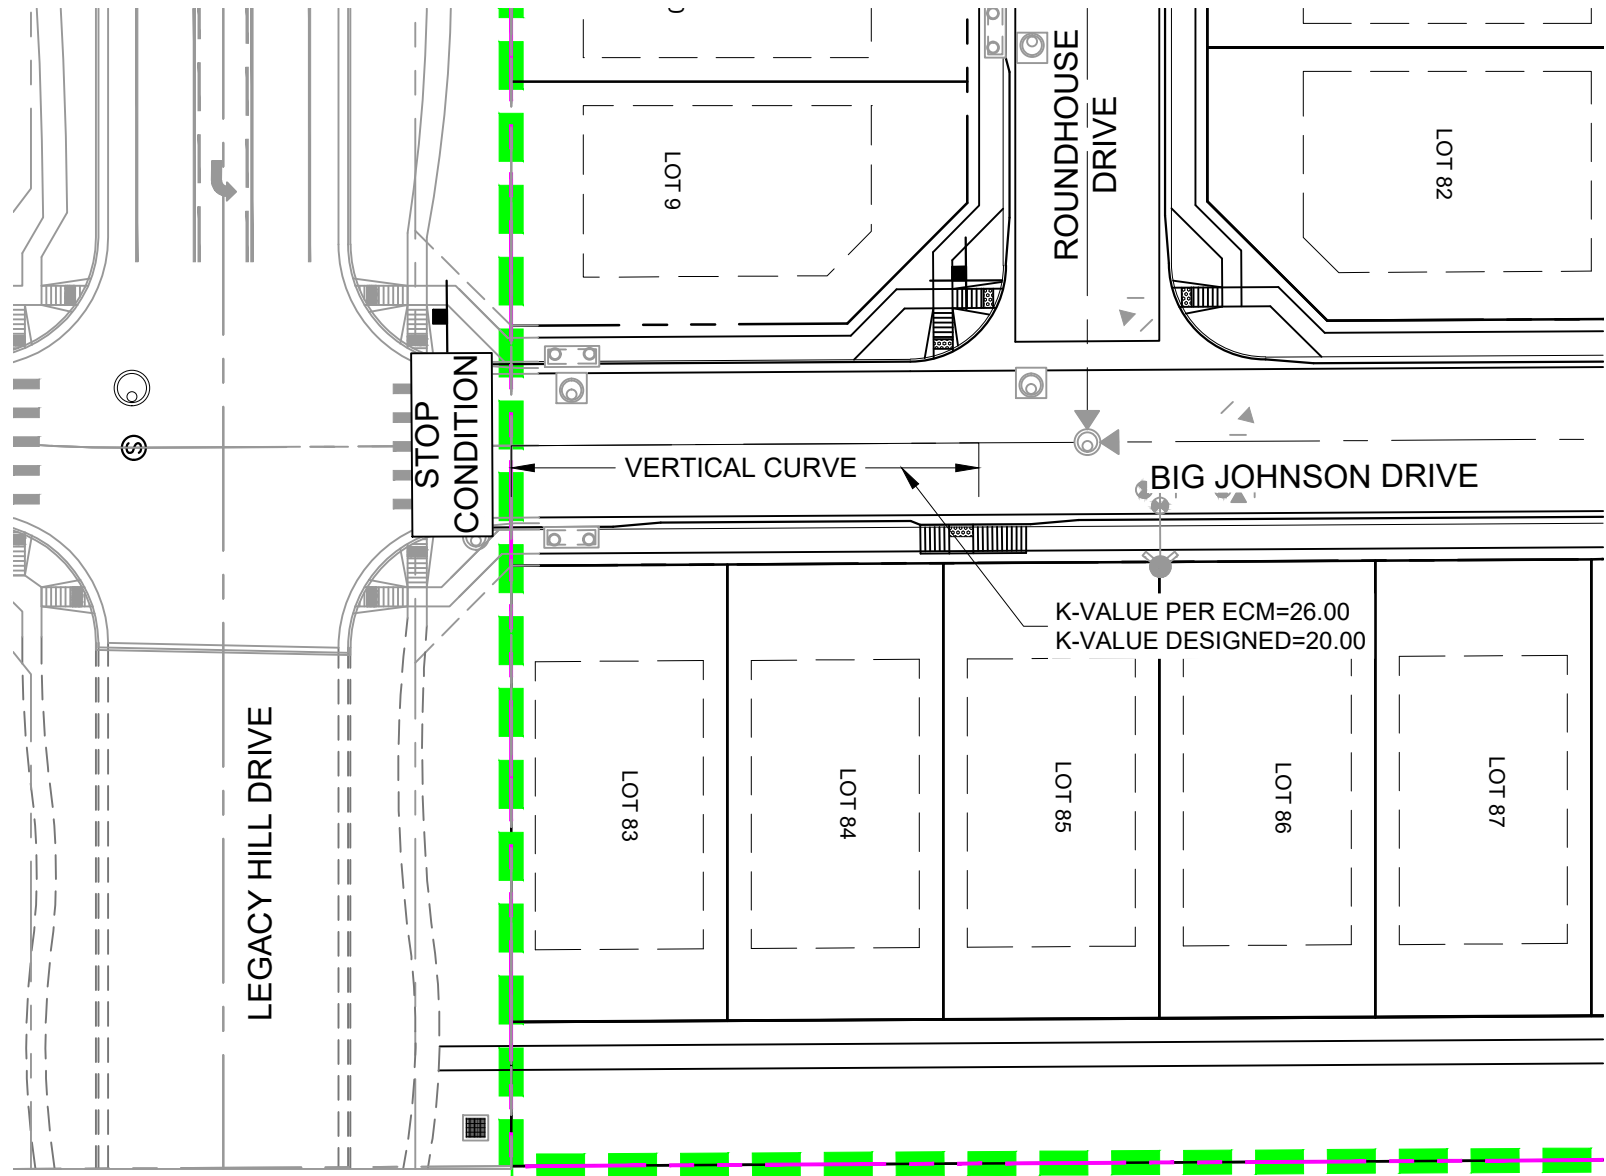


BIG JOHNSON DRIVE & LEGACY HILL DRIVE INTERSECTION
TRAILS AT ASPEN RIDGE FILING NO. 2 DEVIATION EXHIBIT
MARCH, 2020

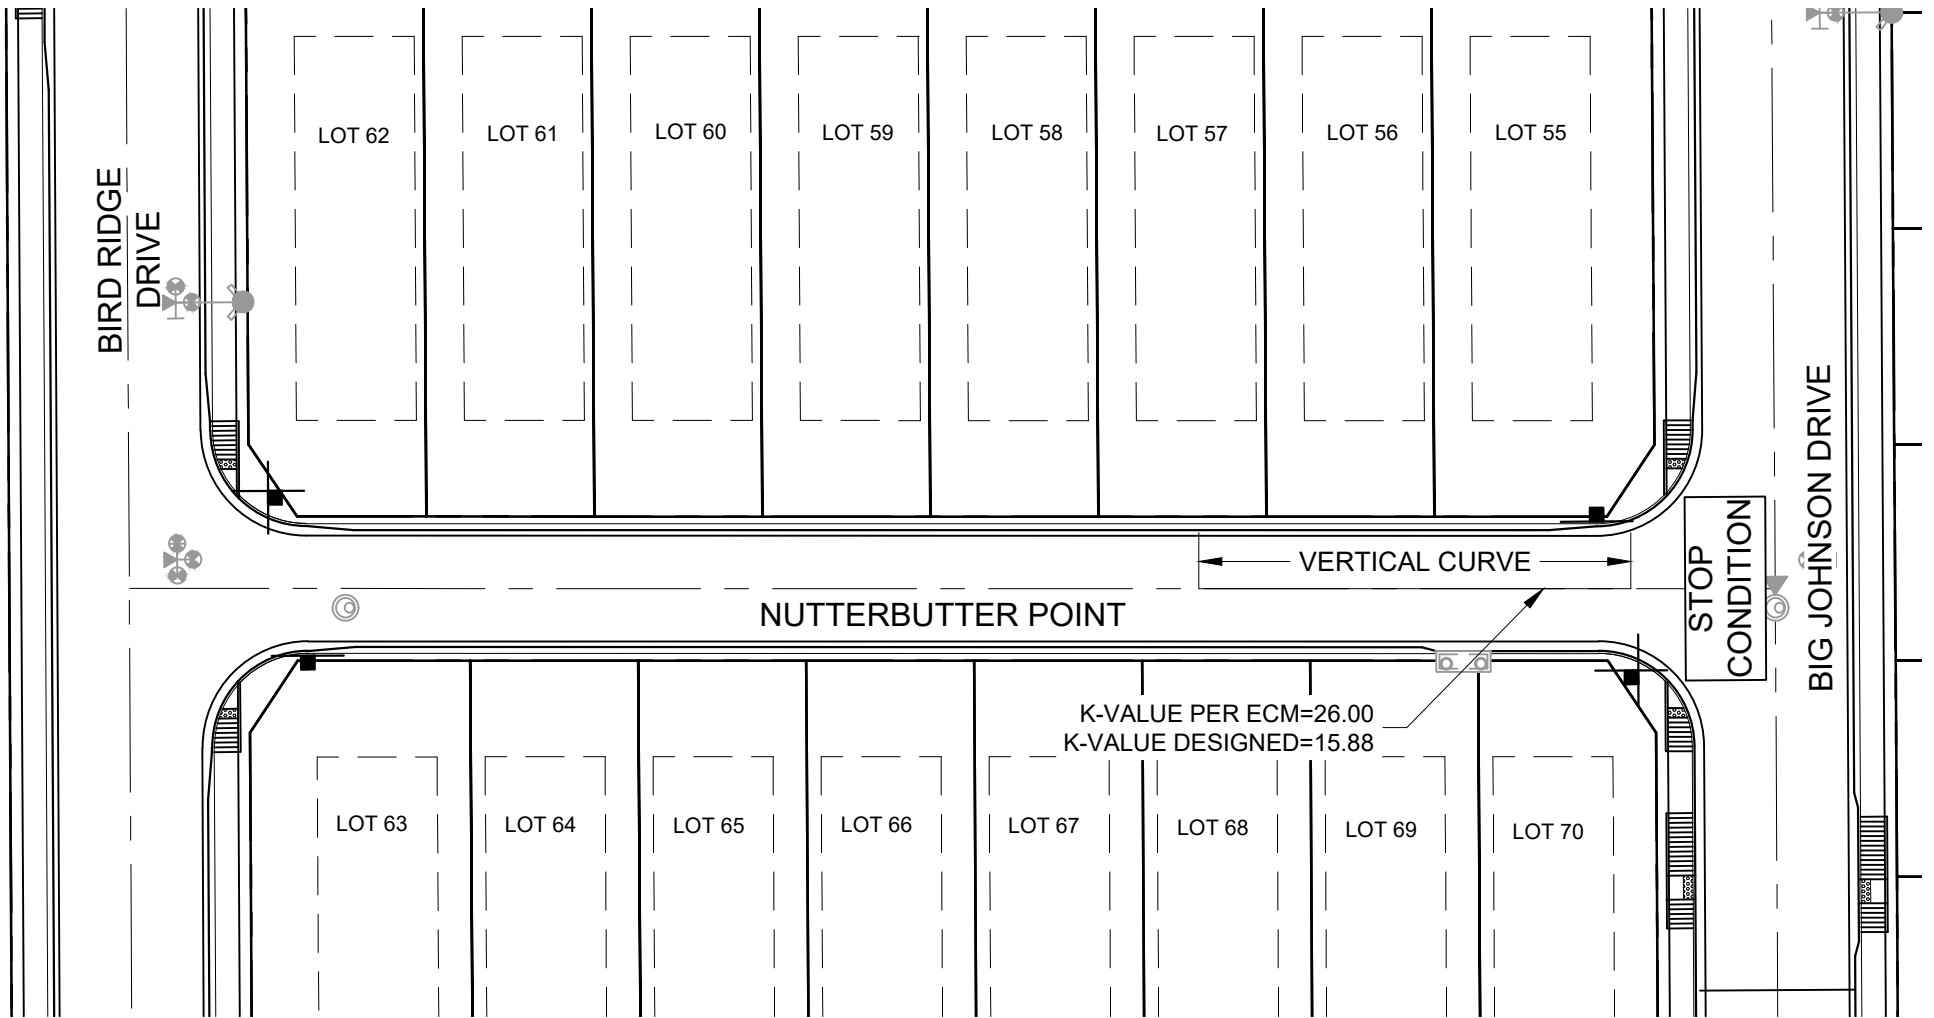



NUTTERBUTTER POINT & BIG JOHNSON DRIVE INTERSECTION
 TRAILS AT ASPEN RIDGE FILING NO. 2 DEVIATION EXHIBIT
 MARCH, 2020



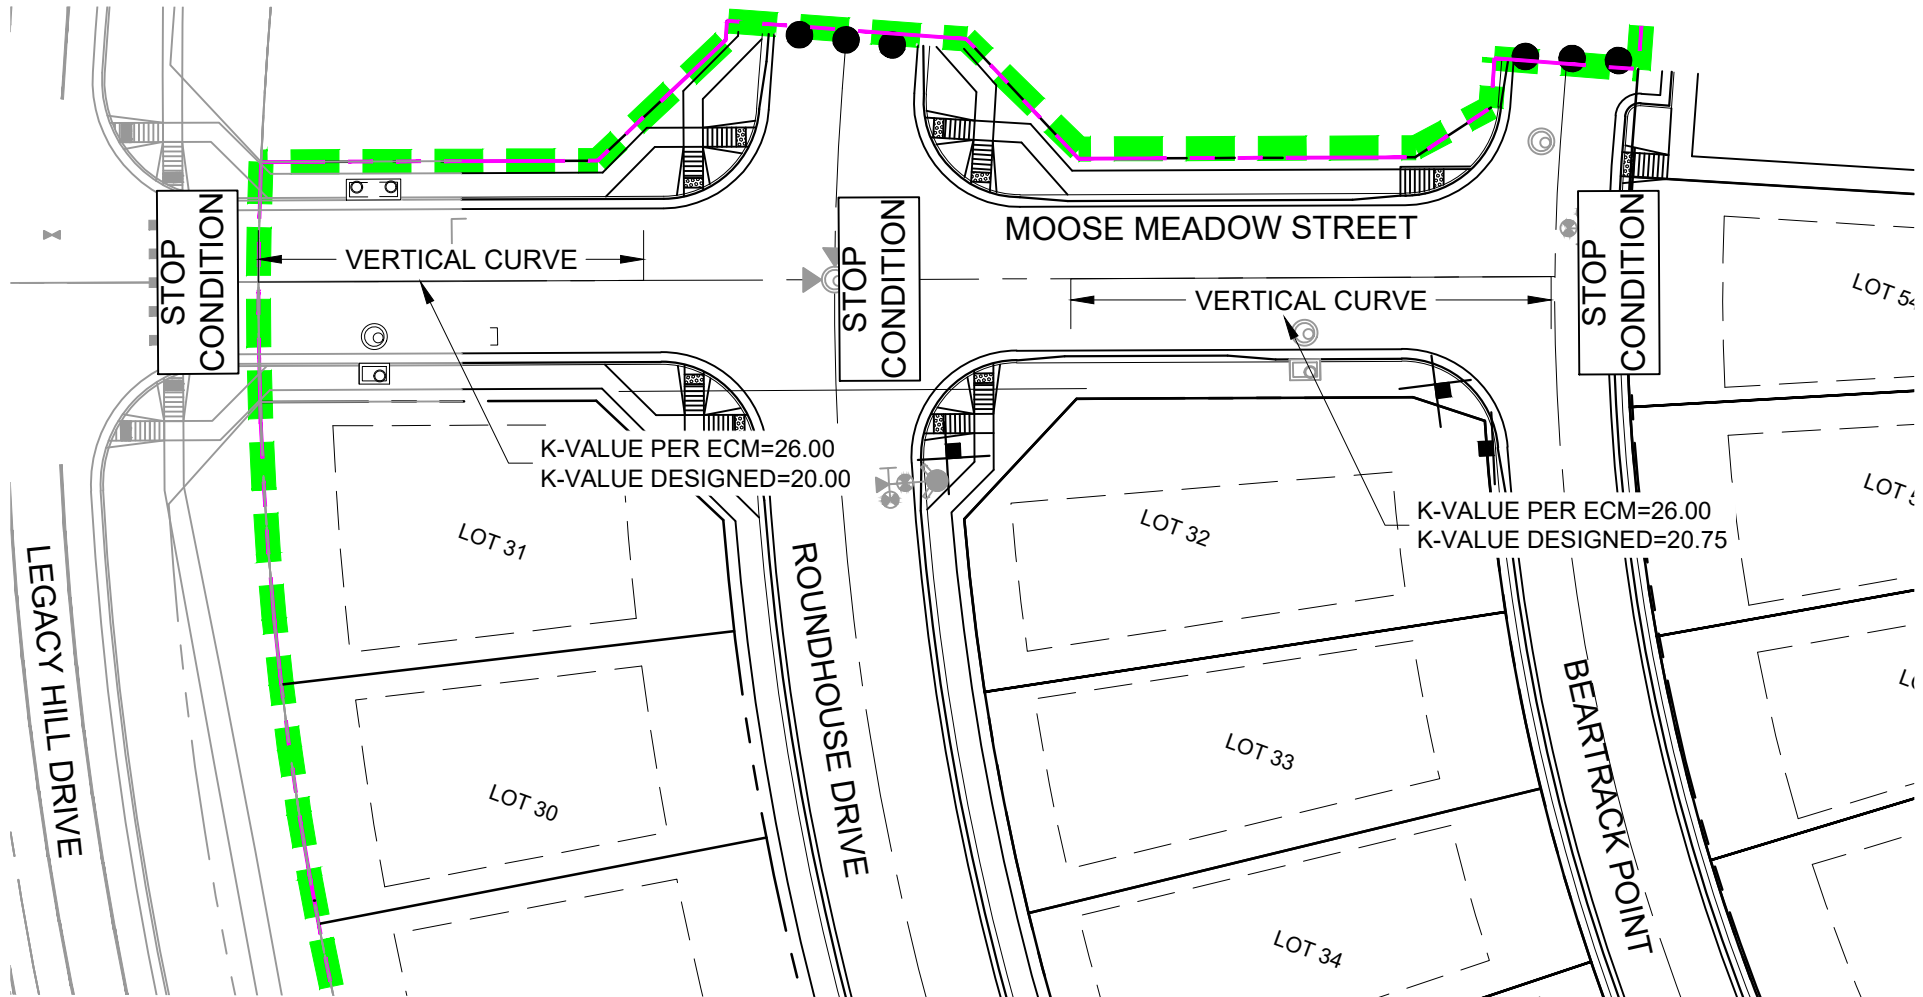

LEGACY HILL DRIVE & MOOSE MEADOW STREET AND
MOOSE MEADOW STREET & BEARTRACK POINT INTERSECTIONS
TRAILS AT ASPEN RIDGE FILING NO. 2 DEVIATION EXHIBIT
MARCH, 2020



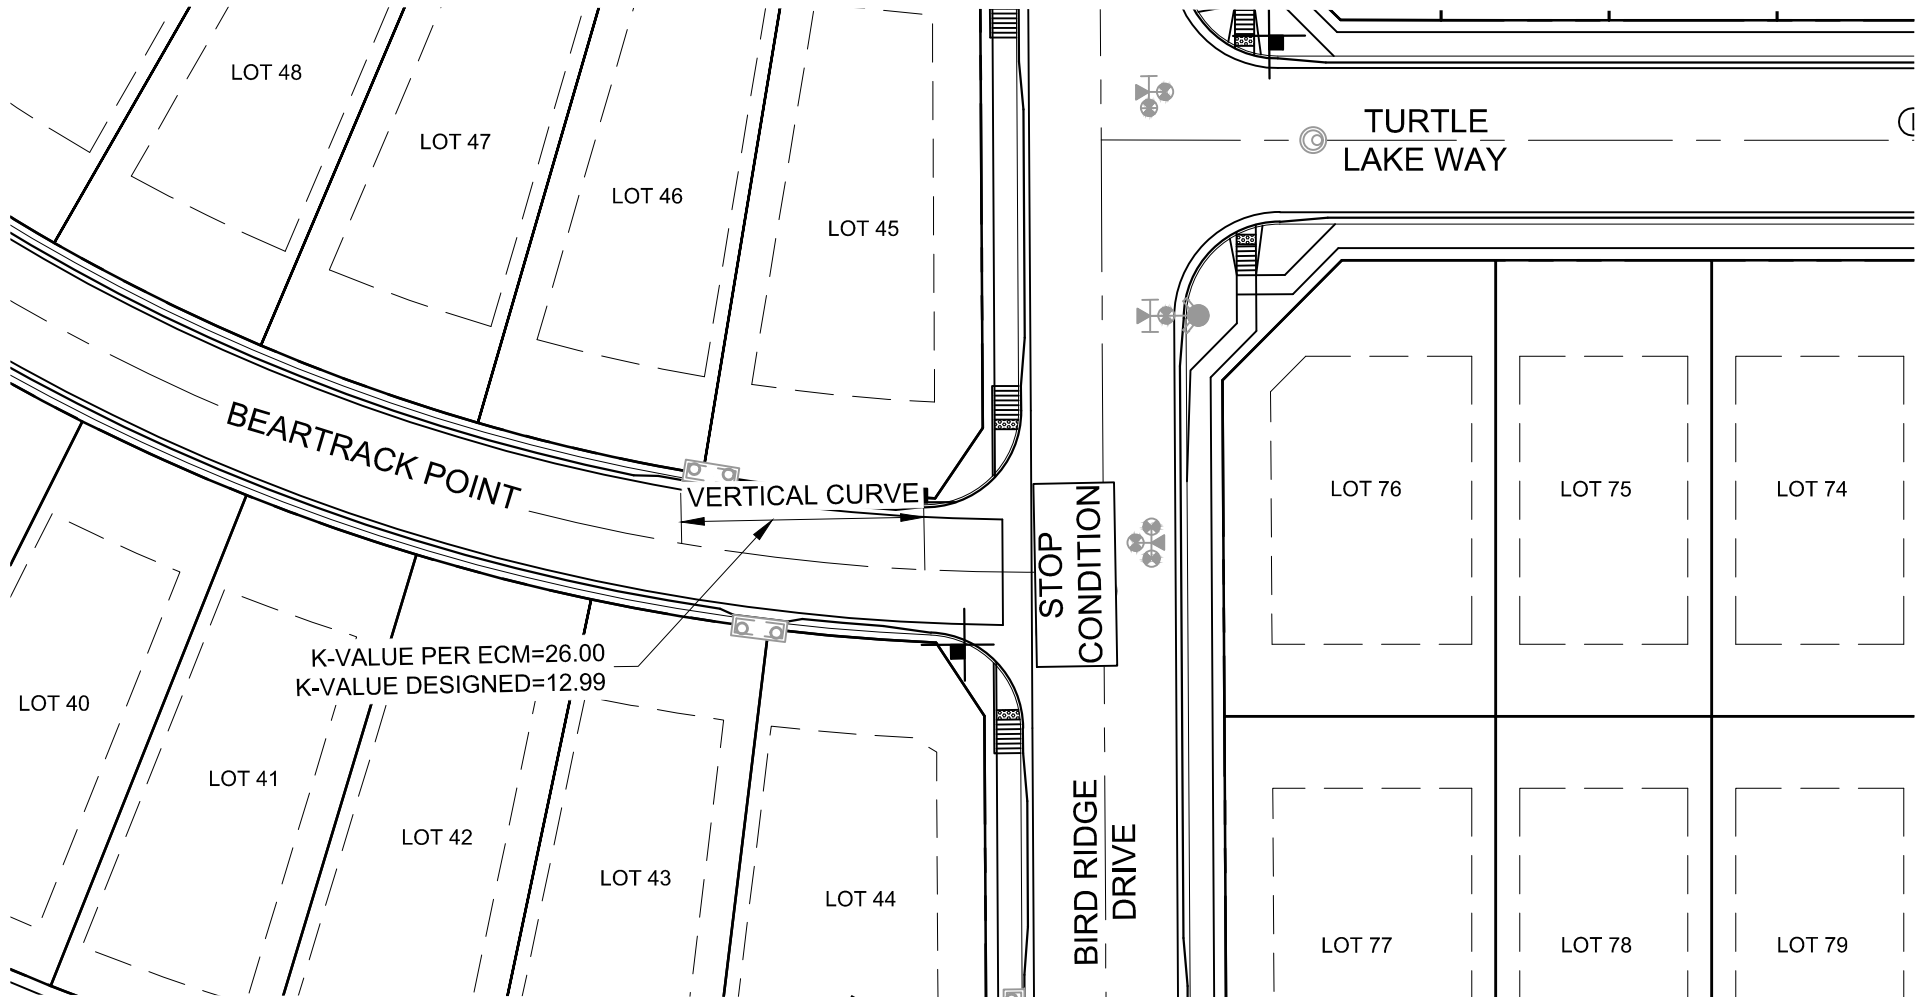

BEARTRACK POINT & BIRD RIDGE DRIVE INTERSECTION
TRAILS AT ASPEN RIDGE FILING NO. 2 DEVIATION EXHIBIT
MARCH, 2020

