



# MVE, INC.

ENGINEERS SURVEYORS

1903 kelaray street, suite 200  
colorado springs, co 80909  
719.635.5736

Preliminary  
Drainage Report is  
needed also



## Final Drainage Report

**Eagle Rising Filing  
No. 1**

**Project No. 61145**

**July 15, 2022**

PCD File No.

**PCD File # SF-22-25**

Cursory comments

# **Final Drainage Report**

**Preliminary Report for Eagle Rising and  
Final for**

**Eagle Rising Filing No. 1**

**Project No. 61145**

**July 15, 2022**

prepared for

**MyPad, Inc. and Casas Limited Partnership #4**  
5390 N. Academy Boulevard, Suite 300  
Colorado Springs, CO 80918

prepared by

**MVE, Inc.**  
1903 Lelaray Street, Suite 200  
Colorado Springs, CO 80909  
719.635.5736

Copyright © MVE, Inc., 2022

61148-EagleRising FDR.odt

# Statements and Acknowledgments

## Engineer's Statement

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the applicable master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.

\_\_\_\_\_  
Charles C. Crum, P.E.  
For and on Behalf of MVE, Inc.

Colorado No. 13348

\_\_\_\_\_  
Date

Stamp and signatures needed

## Developer's Statement

I, the owner/developer have read and will comply with all of the requirements specified in this drainage report and plan.

\_\_\_\_\_  
Stephen J. Jacobs  
MyPad, Inc. and Casas Limited Partnership #4  
5390 N. Academy Boulevard, Suite 300  
Colorado Springs, CO 80918

\_\_\_\_\_  
Date

## El Paso County

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 and 2, El Paso County Engineering Criteria Manual and Land Development Code as amended.

\_\_\_\_\_  
Joshua Palmer, P.E.,  
Interim County Engineer / ECM Administrator

\_\_\_\_\_  
Date

Conditions:  Delete "interim"

# Contents

Statements and Acknowledgments.....	iii
Contents.....	v
Final Drainage Report.....	1
<b>1 General Location and Description.....</b>	<b>1</b>
1.1 Location.....	1
1.2 Description of Property.....	1
<b>2 Drainage Basins and Sub-Basins.....</b>	<b>2</b>
2.1 Major Basin Descriptions.....	2
2.2 Other Drainage Reports.....	2
2.3 Sub-Basin Description.....	3
<b>3 Drainage Design Criteria.....</b>	<b>3</b>
3.1 Development Criteria Reference.....	3
3.2 Hydrologic Criteria.....	3
<b>4 Drainage Facility Design.....</b>	<b>3</b>
4.1 General Concept.....	3
4.2 Specific Details.....	3
4.3 Erosion Control.....	7
4.4 Water Quality Enhancement Best Management Practices.....	7
<b>5 Opinion of Probable Cost for Drainage Facilities.....</b>	<b>7</b>
<b>6 Drainage and Bridge Fees.....</b>	<b>8</b>
<b>7 Conclusion.....</b>	<b>8</b>



References.....	9
Appendices.....	11
<b>8 General Maps and Supporting Data.....</b>	<b>11</b>
<b>9 Hydrologic Calculations.....</b>	<b>12</b>
<b>10 Hydraulic Calculations.....</b>	<b>33</b>
<b>11 Report Maps.....</b>	<b>41</b>

# Final Drainage Report

The purpose of this Final Drainage Report is to identify drainage patterns and quantities within and affecting the proposed Eagle Rising development and Eagle Rising Filing No. 1 subdivision. The development project is a residential subdivision with eight (8) 2.5± acre lots, and two (2) tracts. The report will identify specific solutions to problems on-site and off-site resulting from the proposed project. The report and included maps present results of hydrologic and drainage facilities analyses. The report will discuss the recommended drainage improvements to the site and identify drainage requirements relative to the proposed project. This report has been prepared and submitted in accordance with the requirements of the El Paso County development approval process. An Appendix is included with this report with pertinent calculations and graphs used in the drainage analyses and design.

Correct per other comments

## 1 General Location and Description

### 1.1 Location

The proposed Eagle Rising Filing No. 1 site is the first phase of the Eagle Rising project and is located within the east one-half of Section 29, Township 12 South, Range 65 west of the 6th principal meridian in El Paso County, Colorado. Filing No. 1 will consist of 35.296± acres of the 70.8± acre Eagle Rising project site and is situated east of Black Forest Road north of Highland Park subdivision filing No. 2. The site contains two existing single-family residences and several auxiliary structures. The El Paso County Assessor's Schedule Numbers for the site are 5229000034 and 5229000035. The proposed site has never been platted. A Vicinity Map is included in the Appendix.

The south edge of the site is adjacent to an Highland Park subdivision filing No. 2 zoned RR-2.5 (Rural Residential (2.5 acres). Lots 9, 10 & 11 Eagle Wing Estates zoned RR-2.5 each containing a single family residence are located adjacent to the west side of the site. Also adjacent to the west side of the site is an unplatted parcel containing a single-family residence zoned RR-5. Lots 135, 136, 137, 141 & 142, Highland Park Filing No. 3, vacant lots zoned RR-2.5, are all adjacent to the east side of the site. Lot 1 Poco subdivision, containing a single-family residence zoned RR-5, is also adjacent to the east side of the site. Also adjacent to the east side of the site are lots 8 & 9 block 19 Park Forest Estates Filing No 2 zoned RR-5, containing a single-family residence. Lot 14 block 18, and lot 5 block 19, Park Forest Estates Filing No. 2, each containing a single-family residence and zoned RR-5, are adjacent to the north of the site. The site is located in El Paso County's Cottonwood Creek Drainage Basin.

### 1.2 Description of Property

The Eagle Rising Filing No. 1 site is 35.296± acres and is zoned RR-2.5 (Residential Rural (2.5 Acres)). The property is the location of two (2) single-family residences, several auxiliary structures with an existing unpaved driveway.

The site is covered with native grass and weeds in good condition, and coniferous trees. Cottonwood creek flows to the east through the eastern portion of the site. The existing site topography slopes toward Cottonwood Creek with grades that range from 1% to 12%. Cottonwood Creek flows north to south to the east of the Eagle Rising Filing No.1 site. All storm runoff flows east from said Filing No. 1 and into Cottonwood Creek. The site is located in the cottonwood creek major drain basin. The flows from in Cottonwood Creek are tributary to Monument Creek.

According to the National Resource Conservation Service, there are two (2) soil types in the Eagle Rising Filing No. 1 site. Kettle gravelly loamy sand (map unit 40) makes up a portion of the soil in

the center of the site where the existing structure is located. The soil is deep and somewhat excessively drained. Permeability is moderately rapid, surface runoff is slow, and the hazard of erosion is slight to moderate. Kettle gravelly loamy sand is classified as being part of Hydrologic Soil Group B.

The other soil type is Pring Coarse Sandy Loam (map unit 71) which makes up the rest of the site. The soil is deep and well drained. Permeability is moderately rapid, surface runoff is slow, and the hazard of erosion is slight to moderate. Pring Coarse Sandy Loam is classified as being part of Hydrologic Soil Group B.

A portion of the Soil Map and data tables from the National Cooperative Soil Survey and relevant Official Soil Series Descriptions (OSD) are included in the **Appendix**.<sup>1 2</sup>

Cottonwood creek, a major drainage way, runs through the eastern portion of the Eagle Rising site. The 100-year water surface elevation for the drainageway was determined by hydraulic analysis utilizing HEC-RAS as prepared by M&S Civil which is included and accepted in this report. No build areas are shown on the Preliminary Plan and Final Plat for Eagle Rising Filing No. 1 that include the 100-year inundated area determine in the hydraulic analyses as well as Construction/Disturbance Limits from the Wetland Determination Mapping for the project. Two existing ponds, which are to remain, are present in the drainageway.

The current Flood Insurance Study of the region includes Flood Insurance Rate Maps (FIRM), effective on December 7, 2018.<sup>3</sup> The proposed subdivision is included in the Community Panels Numbered 08041C0527 G and 08041C0535 G of the Flood Insurance Rate Maps for the El Paso County. A small area in the southeastern corner of the Eagle Rising Site is shown to be included in a 100-year flood hazard area as determined by FEMA. None of this 100-year flood hazard area is within the Eagle Rising Filing No. 1 boundary. A portion of the current FEMA Flood Insurance Rate Maps with the site delineated is included in the **Appendix**.

elevations should be noted on the drainage map.

## 2 Drainage Basins and Sub-Basins

### 2.1 Major Basin Descriptions

The Eagle Rising Filing No. 1 site is located in the Cottonwood Creek Drainage Basin (FOMO2200) of the Fountain Creek Major Drainage Basin. The Cottonwood Creek Drainage Basin Covers an area of approximately 19 square miles and drains to Monument Creek. The *Cottonwood Creek Drainage Basin Planning Study* provides development recommendations and requirements for drainage development in the Cottonwood Creek Drainage Basin (DBPS).<sup>4</sup> The Cottonwood Creek Drainage Basin encompasses a part of the northeast portion of the City of Colorado Springs and extends to the north and east. The drainage basin and Cottonwood Creek drain southwest into Monument Creek. The Eagle Rising Filing No. 1 site is located north of Cottonwood Creek as it flows offsite towards Monument Creek. The site is located in sub-basin WR 050, upstream of Design Point 040 of the Drainage Basin Planning Study. No improvements are recommended on or near the project site. The proposed Eagle Rising Filing No. 1 project is in conformance with the DBPS.

### 2.2 Other Drainage Reports

The "Eagle Rising Preliminary Drainage Report" by M&S Civil Consultants, Inc. dated July, 2013 was reviewed in preparation of this Preliminary / Final Drainage Report.<sup>5</sup> Said report is not approved and therefore was only used for informational purposes. Calculations in said report were reviewed and found to be in compliance with the Drainage Design Criteria used to for the preparation of this report. M.V.E., Inc. has prepared and updated Preliminary Drainage Report for Eagle Rising which is submitted with the Preliminary Plan application for the project.

1 WSS  
2 OSD  
3 FIRM  
4 DBPS  
5 2015 PDR

## 2.3 Sub-Basin Description

The existing drainage patterns of the Eagle Rising development project are described by various sub-basins making up 21 Design Points on the site. All existing sub-basin delineations and data are depicted on the attached **Existing Drainage Map**.

## 3 Drainage Design Criteria

### 3.1 Development Criteria Reference

This Final Drainage Report for Eagle Rising Filing No. 1 has been prepared according to the report guidelines presented in the latest edition of *El Paso County Drainage Criteria Manual (DCM)*<sup>6</sup>. The County has also adopted portions of the City of Colorado Springs Drainage Criteria Manual Volumes 1 and 2, especially concerning the calculation of rainfall runoff flow rates.<sup>7 8</sup> The hydrologic analysis is based on a collection of data from the DCM, the NRCS Web Soil Survey<sup>9</sup>, and existing topographic data by Land Resource Associates.

### 3.2 Hydrologic Criteria

For this Final Drainage Report, the Rational Method as described in the *Drainage Criteria Manual* has been used for all Storm Runoff calculations, as the development and all sub-basins are less than 130 acres in area. "Colorado Springs Rainfall Intensity Duration Frequency" curves, Figure 6-5 in the DCM, was used to obtain the design rainfall values; a copy is included in the **Appendix**. The "Overland (Initial) Flow Equation" (Eq. 6-8) in the DCM, and Manning's equation with estimated depths were used in time of concentration calculations. "Runoff Coefficients for Rational Method", Table 6-6 in the DCM, was utilized as a guide in estimating runoff coefficient and Percent Impervious values; a copy is included in the **Appendix**. Peak runoff discharges were calculated for each drainage sub-basin for both the 5-year storm event and the 100-year storm event with the Rational Method formula, (Eq. 6-5) in the DCM.<sup>10</sup>

## 4 Drainage Facility Design

### 4.1 General Concept

The intent of the drainage concept presented in this Final Drainage Report is to allow for the development of the first phase of Eagle Rising which is Eagle Rising Filing No. 1 consisting of eight (8) 2.5-acre lots, and two (2) tracts while maintaining the existing drainage patterns on the site. The site will be in compliance with the County's Stormwater Management regulations without the need for permanent water quality treatment facilities. Major and minor storm flows will continue to be safely conveyed through the site and downstream.

The existing and proposed drainage hydrologic conditions are described in more detail below. Input data and results for all calculations are included in the **Appendix**. Drainage maps for the hydrology are also included in the **Appendix**.

### 4.2 Specific Details

#### 4.2.1 Existing Hydrologic Conditions

The Eagle Rising Development is approximately 70 acres in size. The site primarily consists of grass land with slopes ranging from 4% to 12% and greater adjacent to Cottonwood Creek. The Cottonwood Creek main stem and several tributary branches are located within the site boundary. In addition, there are two on-line ponds along the main stem. These two man-made ponds along the channel reach which were believed to be constructed around the 50's. The purpose for their

6 DCM Section 4.3 and Section 4.4

7 CS DCM Vol 1

8 CS DCM Vol 2

9 WSS

10 DCM

construction is unknown due to lack of history but is speculated to be for livestock use. There is one residence with ancillary buildings present. Existing gravel roadways provide access. There is no evidence of severe erosion or degradation of existing channel. However, it has been mentioned by the previous owner that the existing ponds did overflow at the existing locations, into the downstream channel. Also, there is no evidence of large sediment transfer deposits in the channel way or in the existing ponds.

The existing upstream land is currently 80% developed into 2.5 acre lots or larger, as planned in the Cottonwood Creek DBPS. Therefore, the planned developed flows per the DBPS are closely matched to the current flows routed through the site. A brief description of each existing drainage basin including runoff rates, and drainage patterns for each basin is provided in this section of the report. A summary of peak developed runoff for the basins and designated design points are depicted on the Hydrologic Map - On-site Existing in the appendix. The off-site drainage area impacting Eagle Rising Development and more particularly on-site drainage areas have been divided into existing drainage basins described as follows:

Design Point E1 (DP E1) flows ( $Q_5=307\text{cfs}$ ,  $Q_{100}=547\text{cfs}$ ) are generated from off-site basins A1, A2, A3, A4, A5, A8, A9 & A13. These basins were delineated in the 1994 Cottonwood Creek DBPS. These basins are located at the top of the Cottonwood Creek watershed and consist of large lot subdivisions, open space, fields and pastures. DP E1 is located on the main stem of Cottonwood Creek at the site northern boundary as creek flow enters the Eagle Rising development.

Design Point E2 (DP E2) flows ( $Q_5=24\text{cfs}$ ,  $Q_{100}=57\text{cfs}$ ) are generated from off-site basin OS-B1A. This basin is a sub-basin of DBPS basin B1 and has been created to determine the flow at the entry point into the site along a tributary branch of the main stem. This basin consists of large lot subdivisions, open space, fields and pastures.

Design Point E3 (DP E3) flows ( $Q_5=42\text{cfs}$ ,  $Q_{100}=98\text{cfs}$ ) are generated from off-site basin OS-B1B. This basin is a sub-basin of DBPS basin B1 and has been created to determine the flow at the entry point into the site along a tributary branch of the main stem. This basin consists of large lot subdivisions, open space, fields and pastures.

Design Point E4 (DP E4) flows ( $Q_5=76\text{cfs}$ ,  $Q_{100}=136\text{cfs}$ ) are generated from off-site basins A6, A7 and A10. These basins were delineated in the 1994 Cottonwood Creek DBPS. These basins consist of large lot subdivisions, open space, fields and pastures. DP E4 is located along a tributary reach off the main stem of Cottonwood Creek as flow enters the Eagle Rising development

Design Point E5 (DP E5) flows ( $Q_5=408\text{cfs}$ ,  $Q_{100}=728\text{cfs}$ ) are generated from DP E1, DP E4 on-site basin EX-A and off-site basin A11. On-site basin EX-A consists of open space as well as a small portion of the creek itself. Off-site basin A11 consists of large lot subdivisions, open space, fields and pastures. These basins were delineated in the 1994 Cottonwood Creek DBPS. DPE5 is located on the main stem of Cottonwood Creek

Design Point E6 (DP E6) flows ( $Q_5=484\text{cfs}$ ,  $Q_{100}=884\text{cfs}$ ) are generated from DP E2, DP E3, DP E5, on-site basin EX-B and off-site basin A12. On-site basin EX-B consists of large lot (2.5ac +/-) existing development as well as a small portion of the creek itself. Off-site basin A12 consists of large lot subdivisions, open space, fields and pastures. This basin was delineated in the 1994 Cottonwood Creek. Design Point E7 (DP E7) flows ( $Q_5=1.7\text{cfs}$ ,  $Q_{100}=4.0\text{cfs}$ ) are generated from off-site basin OS-B1C. Off-site basin OS-B1C consists of large lot subdivisions, open space, fields and pastures.

Design Point E8 (DP E8) flows ( $Q_5=6\text{cfs}$ ,  $Q_{100}=14\text{cfs}$ ) are generated from off-site basin OS-B1D. Off-site basin OS-B1D consists of large lot subdivisions, open space, fields and pastures.

Design Point E9 (DP E9) flows ( $Q_5=485\text{cfs}$ ,  $Q_{100}=893\text{cfs}$ ) are generated from DP E6, D, DP E8, and on-site basin EX-C, EX-D, and off-site basin OS-B4A. Off-site basin OS-B4A is a sub-basin of DBPS basin B4 and has been created to determine the flow at the entry point into the site as sheet flow into the main stem. Off-site basin OS-B4A consists of large lot subdivisions, open space, fields and pastures. On-site basins EX-C and EX-D consist of large lot (~2.5ac +/-) existing development. There are two existing ancillary structures present within the basins.

Design Point E10 (DP E10) flows (Q5=10cfs, Q100=24cfs) are generated from off-site basin OS-B1E. Off-site basin OS-B1E consists of large lot subdivisions, open space, fields and pastures.

Design Point E11 (DP E11) flows (Q5=9cfs, Q100=21cfs) are generated from off-site basin OS-B3A. Off-site basin OS-B3A consists of large lot subdivisions, open space, fields and pastures.

Design Point E12 (DP E12) flows (Q5=499cfs, Q100=926cfs) are generated from DP E9, DP E1, DP E11, on-site basins EX-E, EX-F, and off-site basin OS-B4B. Off-site basin OS-B4B is a sub-basin of DBPS basin B4 and has been created to determine the flow at the entry point into the site as sheet flow into the main stem. Off-site basin OS-B4A consists of large lot subdivisions, open space, fields and pastures. On-site basins EX-E and EX-F consist of pasture.

Design Point E13 (DP E13) flows (Q5=2.1cfs, Q100=5.1cfs) are generated from off-site basin OS-B3B. Off-site basin OS-B3A consists of large lot subdivisions, open space, fields and pastures.

Design Point E14 (DP E14) flows (Q5=496cfs, Q100=925cfs) are generated from DP E12, DP E13, on-site basins EX-G and EX-H, and off-site basin OS-B4C. Off-site basin OS-B4C consists of large lot subdivisions, open space, fields and pastures. This basin is a sub-basin of DBPS basin B4 and has been created to determine the flow at the entry point into the site at the southern pond along the main stem as primarily sheet flow. DP14 is located on the main stem of Cottonwood Creek. On-site basins EX-G and EX-H consist of pasture.

Design Point E15 (DP E15) flows (Q5=6.5cfs, Q100=14.8cfs) are generated from off-site basin OS-B3C. This basin is a sub-basin of DBPS basin B3 and has been created to determine the flow at the entry point to the site. This calculated flow for information only since it does not mix with on-site flow. This basin consists of large lot subdivisions, open space, fields and pastures within the Eagle Wing subdivision.

Design Point E16 (DP E16) flows (Q5=4.9cfs, Q100=11.6cfs) are generated from off-site basin OS-B3C, and basin EX-H. DP E16 is a summation of the off-site basin and future onsite developed basin. DP E16 can be compared to DP16 in the next section for the total flows exiting the site.

Design Point E17 (DP E17) flows (Q5=64cfs, Q100=152cfs) are generated from off-site basins OS-B1A and OS-B1B (DP E2 & DP E3). The summations of these flows at DP E17 are combined in an existing small local depression area. The depression appears to be man-made, possibly for livestock watering. The current condition of the depression appears to hold some water at certain times of year but not continually. The downstream end of the depression area is a small bank to trap the water in the existing natural swale. The depression area is proposed to be left intact, non disturbed, and is within a no build area.

Design Point E18 (DP E18) flows (Q5=4.2cfs, Q100=10cfs) are generated from off-site basin OS-B1C (DP E7) and basin EX-C1. Basin EX-C1 was created by the construction of the existing Barn Building. The Barn construction has redirected the historic flows to the east and into the Cottonwood channel.

Design Point E19 (DP E19) flows (Q5=64cfs, Q100=151cfs) are generated from the summation of DP E18, basin EX-B, and DP E17. The summations of these historic flows enter the Cottonwood Creek channel and combine with flows from DP E5.

Design Point E20 (DP E20) flows (Q5=9.7cfs, Q100=23cfs) are generated from off-site basin OS-B1D (DP E8) and basin EX-D. Basin EX-D was created by the construction of the existing Barn Building and riding arena. This construction created a flat graded area and man-made pond. The pond overflow continues in the historic drainage swale to DP E20.

Design Point E21 (DP E21) flows (Q5=18cfs, Q100=43cfs) are generated from off-site basin OS-B1E (DP E10), OS-B3A (DP E11) and basin EX-F. Basin EX-F is an undisturbed historic drainage area. The summation of flows at DP E21 discharges into the existing south pond area and combine with flows from upstream DP E9.

The included Eagle Rising Hydrology Maps (Existing On-Site & Off-Site) depicts the existing topographic mapping, drainage basin delineations, drainage patterns, existing drives, drainage facilities, and runoff quantities with a data table including drainage areas and flow rates.

#### 4.2.2 Developed Hydrologic Conditions

Proposed drainage facilities for development of Eagle Rising Filing No. 1 are minimal. The proposed use of the land being 2.5 acre lots does not lead to the necessity of onsite drainage facilities, other than culverts to convey the existing flows under the proposed roadways and driveways. As mentioned above, the existing channel is currently witnessing close to the ultimate flows from the existing upstream developed property. The channel will be left in a natural condition for its aesthetic value, better water quality conditions, for both engineering and economic considerations. The 100 year storm water flow level has been established and used to provide the establishment of drainage no-build easements above said 100 year levels in the Eagle Rising Filing No. 1 areas that are impacted.

A summary of peak developed runoff for the basins and designated design points are depicted on the Hydrologic Map in the appendix. The site has been divided into twelve developed drainage basins described as follows:

Design Point 1 is composed of sub-basin D (0.68 acres) containing pasture and meadow. The sub-basin generates peak storm runoff discharges of  $Q_5 = 0.6$  cfs and  $Q_{100} = 2.0$  cfs (proposed flow) which drains overland to the southeast into Cotton Wood Creek.

Design Point 2 is composed of sub-basins A, OS-B1A, & OS-B1B (6.03 acres) containing structures, pasture and meadows. The combined sub-basins generates peak storm runoff discharges of  $Q_5 = 68.9$  cfs and  $Q_{100} = 169.7$  cfs (proposed flow) which drains overland to a natural channel and small existing pond at Design Point 2 to the southeast into Cotton Wood Creek.

Design Point 3 is composed of sub-basins A, B, C, OS-B1A, & OS-B1B (9.03 acres) containing structures, pasture and meadows. The combined sub-basins generates peak storm runoff discharges of  $Q_5 = 70.0$  cfs and  $Q_{100} = 176.0$  cfs (proposed flow) which drains overland to a natural channel exiting to the southeast into Cotton Wood Creek.

Design Point 4 is composed of sub-basin E (0.45 acres) containing pasture and meadow. The sub-basin generates peak storm runoff discharges of  $Q_5 = 0.2$  cfs and  $Q_{100} = 1.2$  cfs (proposed flow) which drains overland to the east and exiting the Filing into a natural channel draining southeasterly to Cotton Wood Creek.

Design Point 5 is composed of sub-basins F & OS-B1C (3.78 acres) containing pasture and meadow. The combined sub-basins generates peak storm runoff discharges of  $Q_5 = 4.7$  cfs and  $Q_{100} = 14.7$  cfs (proposed flow) which drains overland to the southeast into Cotton Wood Creek.

Design Point 6 is composed of sub-basin H (3.51 acres) containing structures, pasture and meadow. The sub-basin generates peak storm runoff discharges of  $Q_5 = 3.6$  cfs and  $Q_{100} = 10.5$  cfs (proposed flow) which drains overland to the southeast into Cotton Wood Creek.

Design Point 7 is composed of sub-basins G & OS-B1D (6.60 acres) containing structures, pasture and meadows. The combined sub-basins generates peak storm runoff discharges of  $Q_5 = 10.5$  cfs and  $Q_{100} = 31.3$  cfs (proposed flow) which drains overland through an existing pond to a natural channel exiting to the southeast into Cotton Wood Creek.

Design Point 8 is composed of sub-basins I, OS-B1E, & OS-B3A (5.77 acres) containing structures, pasture and meadows. The combined sub-basins generates peak storm runoff discharges of  $Q_5 = 23.4$  cfs and  $Q_{100} = 60.8$  cfs (proposed flow) which drains overland to the proposed roadway ditch & 36" culvert under said roadway and exiting to the southeast.

Design Point 9 is composed of sub-basins I, J, OS-B1E, & OS-B3A (9.01 acres) containing structures, pasture and meadows. The combined sub-basins generates peak storm runoff discharges of  $Q_5 = 25.2$  cfs and  $Q_{100} = 68.2$  cfs (proposed flow) which drains overland and via natural channel to Cotton Wood Creek.

Design Point 10 is composed of sub-basins K, & OS-B3B (2.22 acres) containing pasture and meadows. The combined sub-basins generate peak storm runoff discharges of  $Q_5 = 3.7$  cfs and  $Q_{100} = 11.2$  cfs (proposed flow) which drains through a proposed 24" culvert under an existing drive at Design point E13 exiting to a natural channel to the southeast and Cotton Wood Creek.



The included Eagle Rising Filing No. 1 Proposed Drainage Map depicts the existing topographic mapping, proposed Lots & Tracts, drainage basin delineations, drainage patterns, drainage facilities, and runoff quantities with a data table including drainage areas and flow rates.

**4.3 Erosion Control**

During future construction, best management practices (BMP's) for erosion control will be employed based on the previously referenced City of Colorado Springs Drainage Criteria Manual Volume 2 and the Erosion Control Plan for the site. During Construction, silt fencing, & sediment control logs will be in place to minimize erosion from the site. BMP's will be utilized as deemed necessary by the contractor, engineer, owner, or County inspector and are not limited to the measures described above.

**4.4 Water Quality Enhancement Best Management Practices**

Show on GEC plan and CDs

The El Paso County Engineering Criteria Manual (Appendix I, Section I.7.2 ) requires the consideration of a “Four Step Process for receiving water protection that focuses on reducing runoff volumes, treating the water quality capture volume (WQCV), stabilizing drainageways, and implementing long term source controls”. The Four Step Process is incorporated in this project and the elements are discussed below.

- 1) Runoff Reduction Practices are employed in this project. Impervious surfaces have been reduced as much as practically possible. There is only minimal concrete or other hard surfaces proposed. Minimized Directly Connected Impervious Areas (MDCIA) is employed on the project because runoff passes through a roadside ditch and an open space meadow area before leaving the site.
- 2) All drainage paths on the site are stabilized with appropriate landscape treatment. Rock check dams will be utilized in the ditch running along the roadway to reduce water velocities to promote stabilization. After the installation of the check dams the ditch will be seeded with native grasses. Ditch flow calculations and check dam spacing calculations are included in the Appendix. not found
- 3) The project contains no potentially hazardous uses. The site is exempted from the use of WQCV BMPs by ECM I.7.1 B.5 by virtue of the large lot rural residential nature of the site having percent Imperviousness of less than 10%. The runoff generated from the impervious areas of the gravel road will be treated for water quality by utilizing the runoff reduction standard. Stormwater runoff from the proposed roadway will be collected in the roadside ditches and will infiltrate into the ground, evaporate, or evapotranspire a quantity of water equal to at least 60% of what the calculated WQCV would be if all impervious area for the applicable development site discharged without infiltration. Runoff Reduction calculations are included in the appendix. needs an approved deviation request
- 4) The rural residential development is not anticipated to contain storage of potentially harmful substances or use of potentially harmful substances. No site specific or other source control BMPs are required.

**5 Opinion of Probable Cost for Drainage Facilities**

The costs of new drainage facilities anticipated for the Eagle Rising Filing No. 1 development are listed below.

**Opinion of Costs – On-Site Private Storm Water Facilities – Non Reimbursable**

- 152 LF of 24” RCP @ \$83/LF = \$12,616
- 4 EA 24” FES @ \$498/EA = \$ 1,992
- 30 CY of Type M Rip-Rap @ \$124/CY = \$ 3,720

Add brief discussion on 30inch RCP for between lot 4 & 5 for future emplacement. This is part of the drainage plan



Sub – Total	= \$18,328
10% Engineering Contingency	= \$ <u>1,833</u>
Grand Total	= <u>\$20,161</u>

Bridge fee is  
\$1156/IMP acre  
Admin error

## 6 Drainage and Bridge Fees

The site is located within the Cottonwood Creek Drainage Basin of Fountain Creek, El Paso Basin Number FOMO2200, which was last studied in 1994. Fees associated with this basin are Drainage Fees of \$21,134 per impervious acre and **Bridge Fees of \$1,080** per impervious acre. The percent Imperiousness of the 2.5-acre Rural Residential site is 11% in accordance with El Paso County Engineering Criteria Manual Appendix L Table 3-1. Also, reductions in the per acre Drainage Fee are allowed pursuant to El Paso County Resolution 99-383. A fee reduction in the amount of 25% for lots 2.5 acres or large is utilized for this project. The Eagle Rising Filing No. 1 site contains 35.296 acres. Drainage and Bridge Fees for the site are calculated below:

Eagle Rising Filing No. 1

### FEE CALCULATION (Cottonwood Creek 2022 Drainage and Bridge Fees)

Drainage Fee =	35.296 x \$21,134/Imp. Ac x 0.11 Imp.	=	\$82,054.02
Bridge Fee =	35.296 x \$1,156/Imp. Ac x 0.11 Imp.	=	<u>\$ 4,488.24</u>
	Subtotal	=	\$86,542.26
	25% Reduction of Drainage Fee	=	<del>(\$21,635.57)</del>
	<b>Grand Total Fees</b>	=	<b><u>\$ 64,906.69</u></b>

this only applies to  
the drainage fee,  
not bridge

## 7 Conclusion

This Final Drainage Report presents existing and proposed drainage conditions for the proposed Eagle Rising Filing No. 1 project. The development will have negligible and inconsequential effects on the existing site drainage and drainage conditions downstream. The site is exempted from the use of WQCV BMPs by ECM 1.7.1.B.5 by virtue of the large lot rural residential nature of the site having percent imperviousness of less than 10%. The entire site is consists of 2.5-acre single family residential lots which are excluded from Post Construction Stormwater Management requirements due to the low development density as 2.5-acre lots. **With negligible increase in stormwater flows from the site detention will not be necessary for the proposed development and will not be provided.** The proposed project will not, with respect to stormwater runoff, negatively impact the adjacent properties and downstream properties.

# References

*NRCS Web Soil Survey.* United States Department of Agriculture, Natural Resources Conservation Service ("<http://websoilsurvey.nrcs.usda.gov/app/WebSoilSurvey.aspx>", accessed March, 2018).

*NRCS Official Soil Series Descriptions.* United States Department of Agriculture, Natural Resources Conservation Service ("<http://soils.usda.gov/technical/classification/osd/index.html>", accessed March, 2018).

*Flood Insurance Rate Map.* Federal Emergency Management Agency, National Flood Insurance Program (Washington D.C.: FEMA, December 7, 2018).

*Cottonwood Creek Drainage Basin Planning Study.* Matrix Design Group (Colorado Springs: El Paso County, July, 2019).

*Eagle Rising Preliminary Drainage Report.* M&S Civil Consultants, Inc. (Colorado Springs, Colorado: , August, 2015 ).

*NCSS Web Soil Survey.* United States Department of Agriculture, Natural Resources Conservation Service ("<http://websoilsurvey.nrcs.usda.gov/app/WebSoilSurvey.aspx>", accessed May, 2017).

*Drainage Criteria Manual Volume 2, Stormwater Quality Policies, Procedures and Best Management Practices (BMPs).* City of Colorado Spring Engineering Division (Colorado Springs: , May 2014).

*City of Colorado Springs Drainage Criterial Manual, Volume 1.* City of Colorado Springs Engineering Division Staff, Matrix Desgin Group/Wright Water Engineers (Colorado Springs: , May 2014).

*City of Colorado Springs/El Paso County Drainage Criteria Manual.* City of Colorado Springs, Department of Public Works, Engineering Division; HDR Infrastructure, Inc.; El Paso County, Department of Public Works, Engineering Division (Colorado Springs: City of Colorado Springs, Revised November 1991).


*City of Colorado Springs Drainage Criteria Manual Volume 1.* City of Colorado Springs Engineering Division with Matrix Design Group and Wright Water Engineers (Colorado Springs, Colorado: , May 2014).

Add reference EPC Engineering Criteria Manual

# | Appendices

## **8 General Maps and Supporting Data**

- Vicinity Map
- Portions of Flood Insurance Rate Map
- Portion of Drainage Area Identification Study Map
- NRCS Soil Map and Tables
- SCS Soil Type Descriptions
- Hydrologic Soil Group Map and Tables

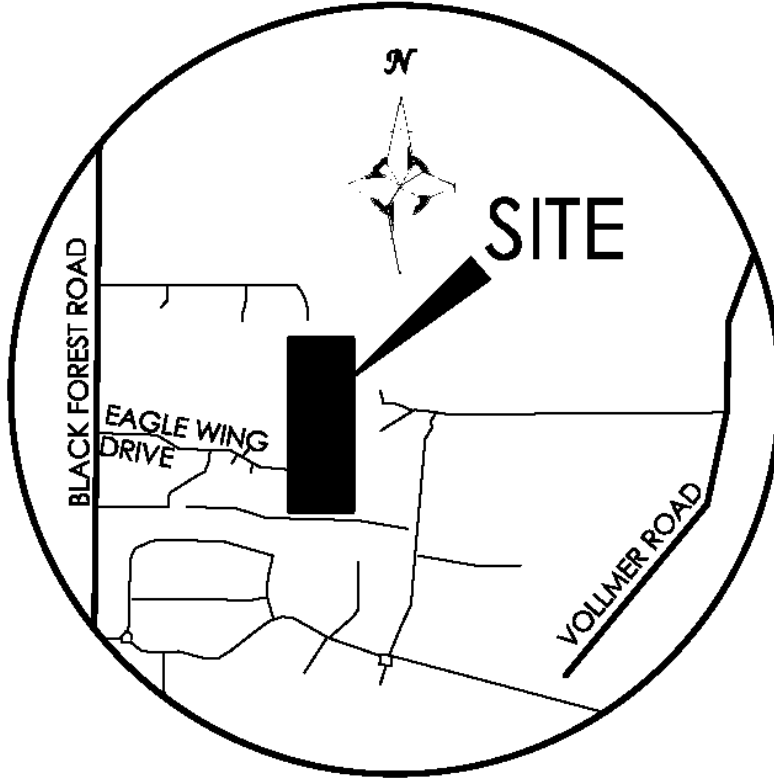


## VICINITY MAP

NOT TO SCALE

# National Flood Hazard Layer FIRMMette



104°41'41"W 38°58'59"N

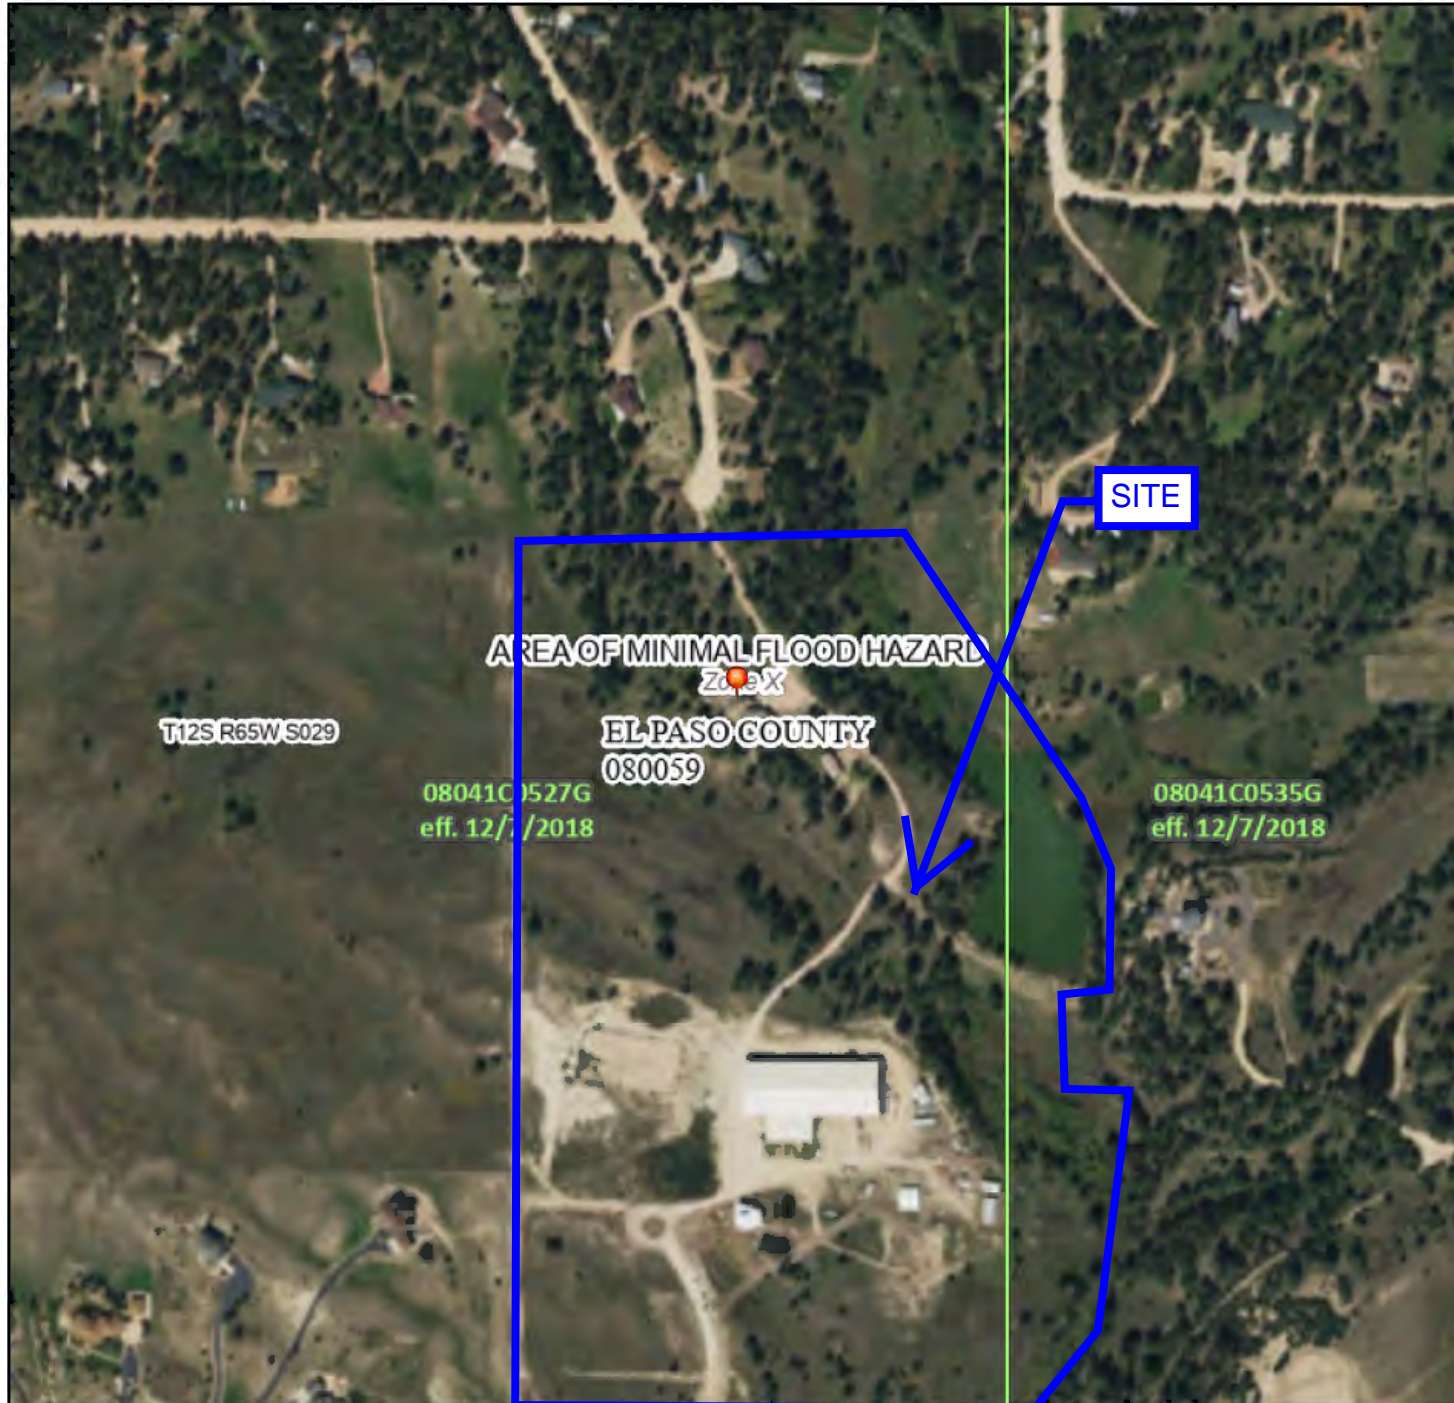

## Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS		Without Base Flood Elevation (BFE) <i>Zone A, V, A99</i>
		With BFE or Depth <i>Zone AE, AO, AH, VE, AR</i>
		Regulatory Floodway
OTHER AREAS OF FLOOD HAZARD		0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile <i>Zone X</i>
		Future Conditions 1% Annual Chance Flood Hazard <i>Zone X</i>
		Area with Reduced Flood Risk due to Levee. See Notes. <i>Zone X</i>
		Area with Flood Risk due to Levee <i>Zone D</i>
OTHER AREAS		NO SCREEN Area of Minimal Flood Hazard <i>Zone X</i>
		Effective LOMRs
GENERAL STRUCTURES		Area of Undetermined Flood Hazard <i>Zone D</i>
		Channel, Culvert, or Storm Sewer
		Levee, Dike, or Floodwall
OTHER FEATURES		20.2 Cross Sections with 1% Annual Chance
		17.5 Water Surface Elevation
		Coastal Transect
		Base Flood Elevation Line (BFE)
		Limit of Study
MAP PANELS		Jurisdiction Boundary
		Coastal Transect Baseline
		Profile Baseline
		Hydrographic Feature
		Digital Data Available
		No Digital Data Available
		Unmapped

The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on **11/15/2021 at 6:32 PM** and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.



# National Flood Hazard Layer FIRMette



104°41'41"W 38°58'36"N



## Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS	Without Base Flood Elevation (BFE) Zone A, V, A99	With BFE or Depth Zone AE, AO, AH, VE, AR	Regulatory Floodway

OTHER AREAS OF FLOOD HAZARD	0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X	Future Conditions 1% Annual Chance Flood Hazard Zone X	Area with Reduced Flood Risk due to Levee. See Notes. Zone X	Area with Flood Risk due to Levee Zone D

OTHER AREAS	NO SCREEN Area of Minimal Flood Hazard Zone X	Effective LOMRs	Area of Undetermined Flood Hazard Zone D

GENERAL STRUCTURES	Channel, Culvert, or Storm Sewer	Levee, Dike, or Floodwall

OTHER FEATURES	20.2 Cross Sections with 1% Annual Chance Water Surface Elevation	17.5 Coastal Transect	Base Flood Elevation Line (BFE)	Limit of Study	Jurisdiction Boundary	Coastal Transect Baseline	Profile Baseline	Hydrographic Feature

MAP PANELS	Digital Data Available	No Digital Data Available	Unmapped

The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.


This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 11/15/2021 at 6:36 PM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.


This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.



Hydrologic Soil Group—El Paso County Area, Colorado

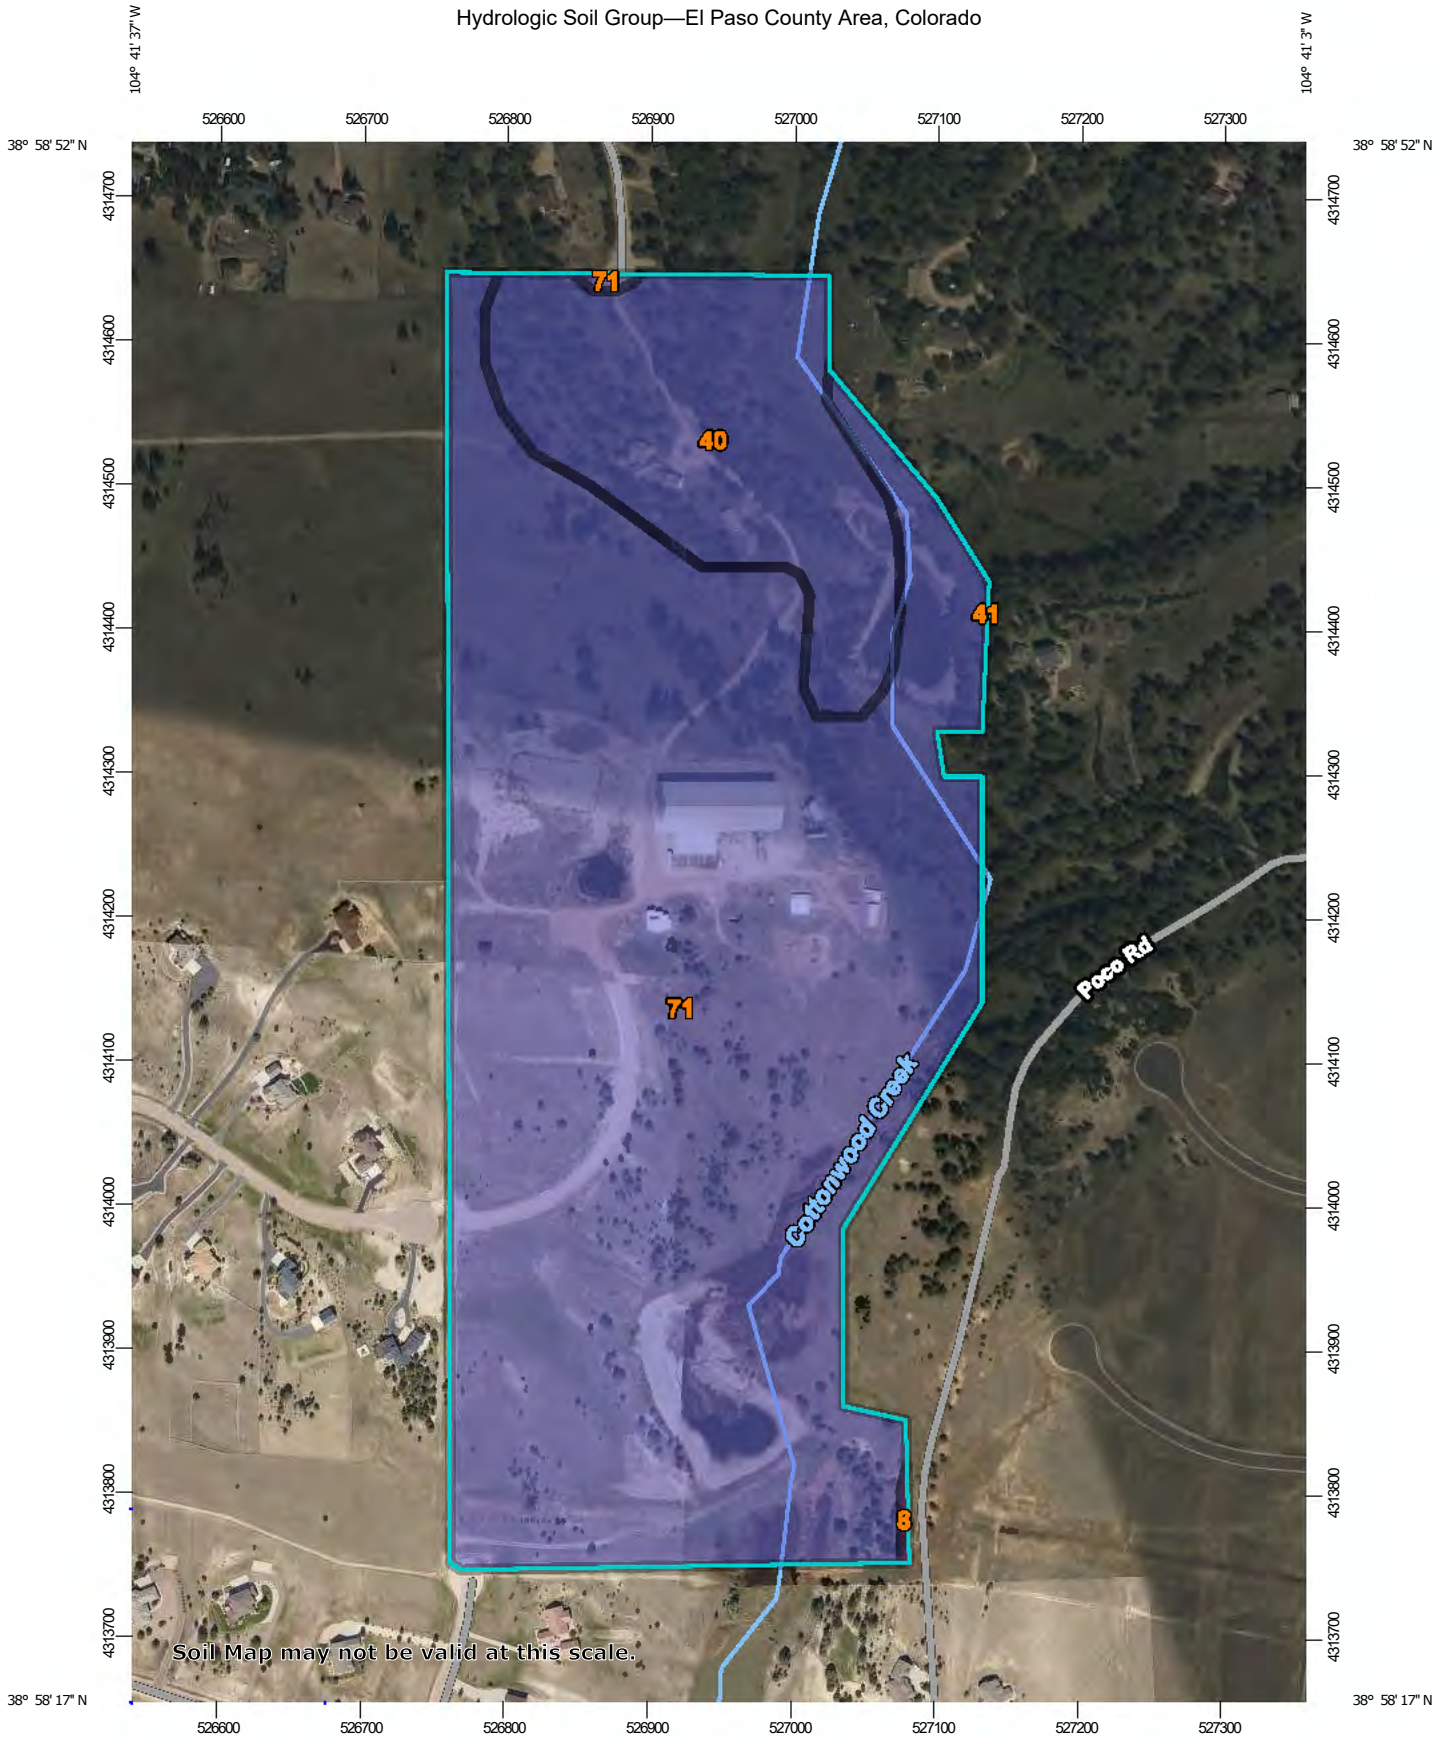


Soil Map may not be valid at this scale.



### MAP LEGEND

**Area of Interest (AOI)**









 Area of Interest (AOI)

**Soils**


**Soil Rating Polygons**





-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available

**Soil Rating Lines**

-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available

**Soil Rating Points**






-  A
-  A/D
-  B
-  B/D

-  C
-  C/D
-  D
-  Not rated or not available


**Water Features**

 Streams and Canals

**Transportation**

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

**Background**

 Aerial Photography

### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

**Warning:** Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL:  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado  
 Survey Area Data: Version 19, Aug 31, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Aug 19, 2018—May 26, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.



## Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
8	Blakeland loamy sand, 1 to 9 percent slopes	A	0.1	0.1%
40	Kettle gravelly loamy sand, 3 to 8 percent slopes	B	12.3	16.9%
41	Kettle gravelly loamy sand, 8 to 40 percent slopes	B	0.0	0.0%
71	Pring coarse sandy loam, 3 to 8 percent slopes	B	60.5	83.0%
<b>Totals for Area of Interest</b>			<b>72.9</b>	<b>100.0%</b>

## Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

## Rating Options

*Aggregation Method:* Dominant Condition

*Component Percent Cutoff:* None Specified

*Tie-break Rule:* Higher



United States  
Department of  
Agriculture

**NRCS**

Natural  
Resources  
Conservation  
Service

A product of the National  
Cooperative Soil Survey,  
a joint effort of the United  
States Department of  
Agriculture and other  
Federal agencies, State  
agencies including the  
Agricultural Experiment  
Stations, and local  
participants

# Custom Soil Resource Report for El Paso County Area, Colorado



# Preface

---

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist ([http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2\\_053951](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951)).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

# Contents

---

<b>Preface</b> .....	2
<b>How Soil Surveys Are Made</b> .....	5
<b>Soil Map</b> .....	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
El Paso County Area, Colorado.....	13
8—Blakeland loamy sand, 1 to 9 percent slopes.....	13
40—Kettle gravelly loamy sand, 3 to 8 percent slopes.....	14
41—Kettle gravelly loamy sand, 8 to 40 percent slopes.....	15
71—Pring coarse sandy loam, 3 to 8 percent slopes.....	16
<b>References</b> .....	18

# How Soil Surveys Are Made

---

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

## Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and



## Custom Soil Resource Report


identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

# Soil Map

---

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

# Custom Soil Resource Report Soil Map

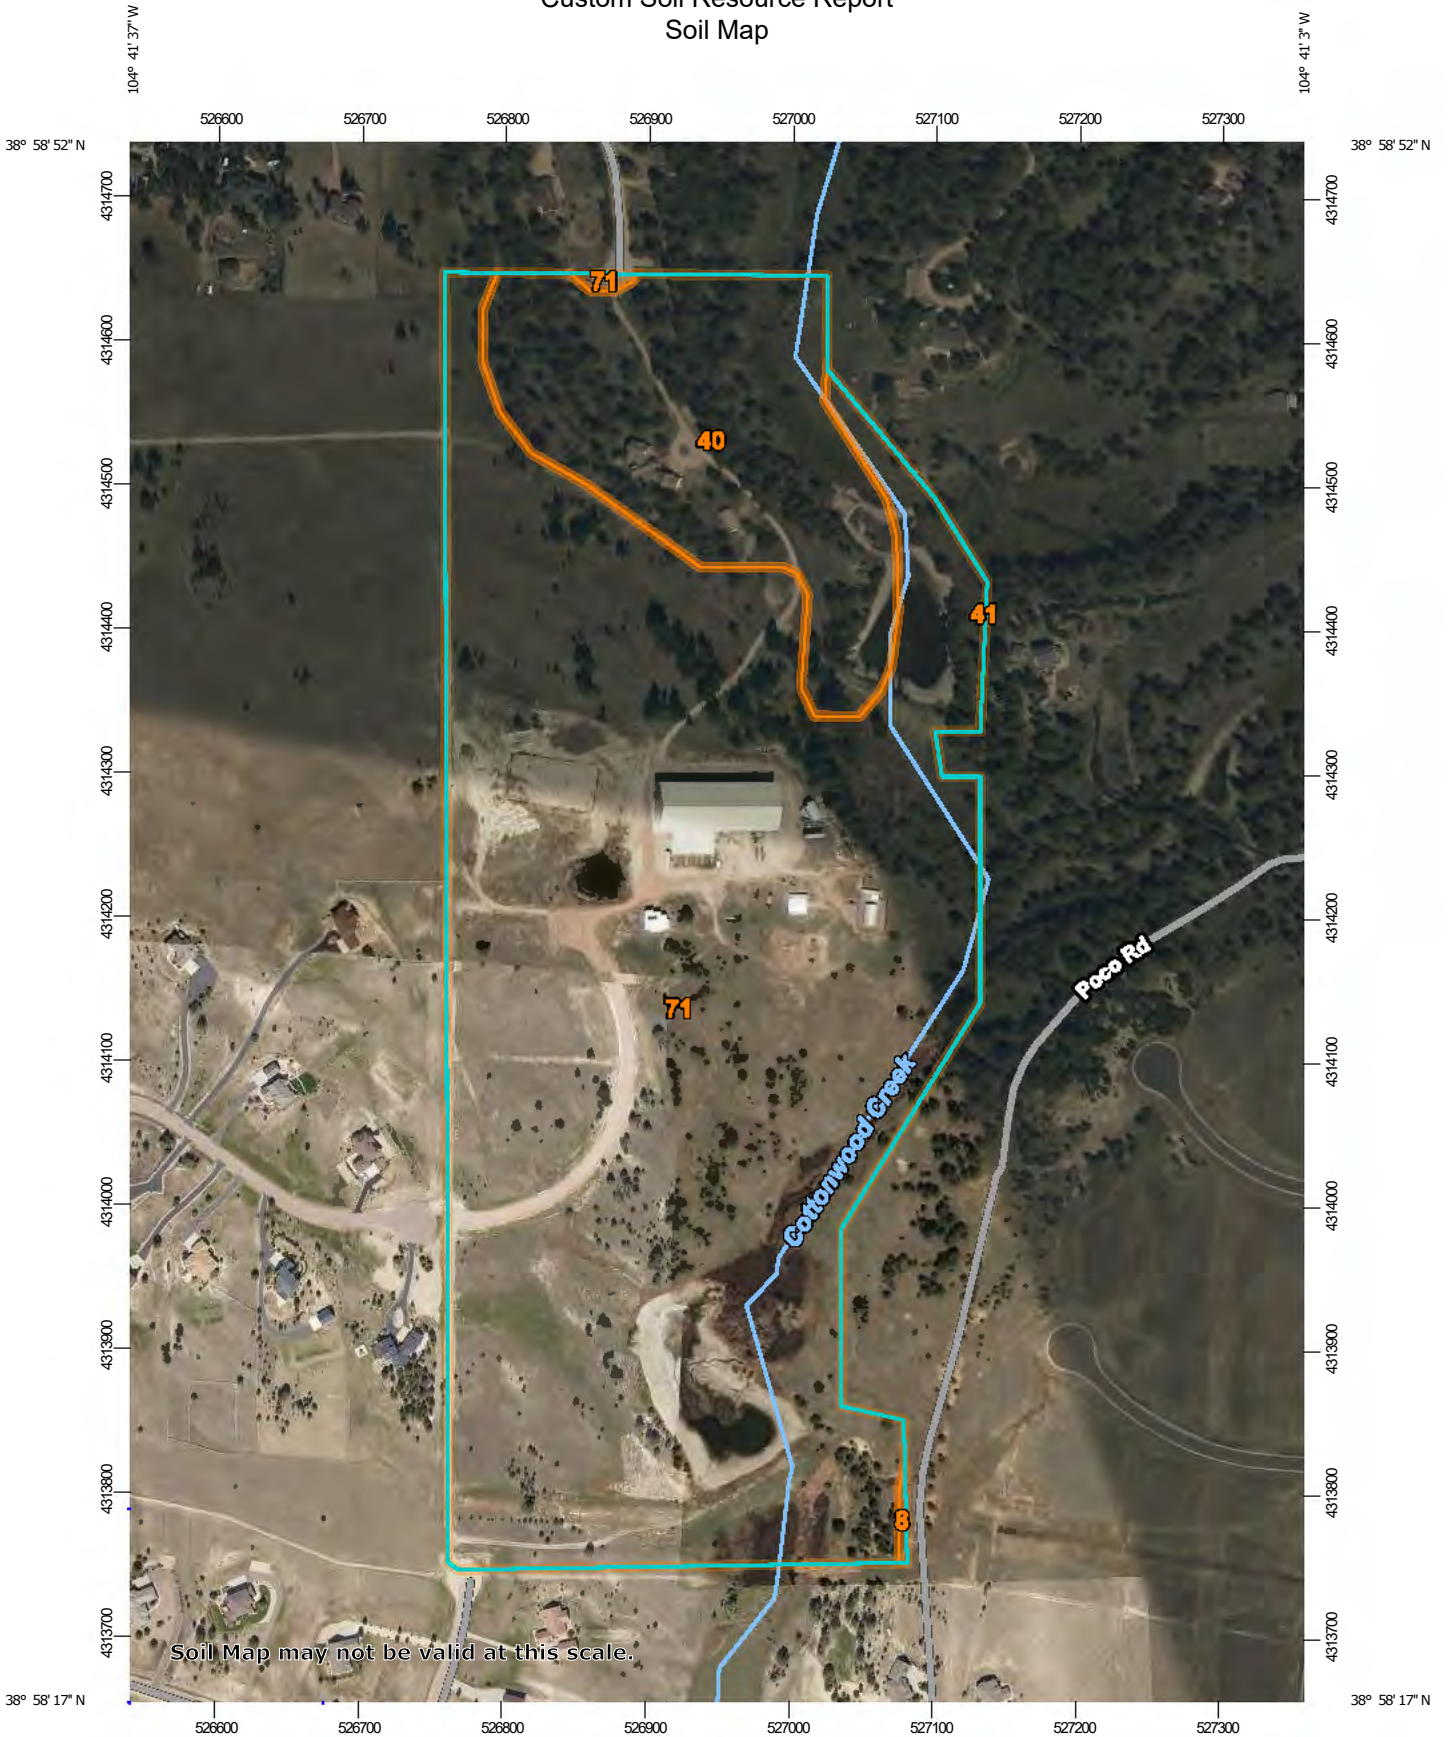

Map Scale: 1:5,280 if printed on A portrait (8.5" x 11") sheet.




Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84



### MAP LEGEND

**Area of Interest (AOI)**

 Area of Interest (AOI)




















**Soils**






 Soil Map Unit Polygons

 Soil Map Unit Lines


 Soil Map Unit Points

**Special Point Features**






-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features


**Water Features**

 Streams and Canals

**Transportation**

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

**Background**

 Aerial Photography

### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL:  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado  
 Survey Area Data: Version 19, Aug 31, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Aug 19, 2018—May 26, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
8	Blakeland loamy sand, 1 to 9 percent slopes	0.1	0.1%
40	Kettle gravelly loamy sand, 3 to 8 percent slopes	12.3	16.9%
41	Kettle gravelly loamy sand, 8 to 40 percent slopes	0.0	0.0%
71	Pring coarse sandy loam, 3 to 8 percent slopes	60.5	83.0%
<b>Totals for Area of Interest</b>		<b>72.9</b>	<b>100.0%</b>

## Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

## Custom Soil Resource Report

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

## El Paso County Area, Colorado

### 8—Blakeland loamy sand, 1 to 9 percent slopes

#### Map Unit Setting

*National map unit symbol:* 369v  
*Elevation:* 4,600 to 5,800 feet  
*Mean annual precipitation:* 14 to 16 inches  
*Mean annual air temperature:* 46 to 48 degrees F  
*Frost-free period:* 125 to 145 days  
*Farmland classification:* Not prime farmland

#### Map Unit Composition

*Blakeland and similar soils:* 98 percent  
*Minor components:* 2 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Blakeland

##### Setting

*Landform:* Hills, flats  
*Landform position (three-dimensional):* Side slope, talf  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Alluvium derived from sedimentary rock and/or eolian deposits derived from sedimentary rock

##### Typical profile

*A - 0 to 11 inches:* loamy sand  
*AC - 11 to 27 inches:* loamy sand  
*C - 27 to 60 inches:* sand

##### Properties and qualities

*Slope:* 1 to 9 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Somewhat excessively drained  
*Runoff class:* Low  
*Capacity of the most limiting layer to transmit water (Ksat):* High to very high (5.95 to 19.98 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Calcium carbonate, maximum content:* 5 percent  
*Available water supply, 0 to 60 inches:* Low (about 4.5 inches)

##### Interpretive groups

*Land capability classification (irrigated):* 3e  
*Land capability classification (nonirrigated):* 6e  
*Hydrologic Soil Group:* A  
*Ecological site:* R049XB210CO - Sandy Foothill  
*Hydric soil rating:* No

#### Minor Components

##### Other soils

*Percent of map unit:* 1 percent

*Hydric soil rating:* No

**Pleasant**

*Percent of map unit:* 1 percent

*Landform:* Depressions

*Hydric soil rating:* Yes

**40—Kettle gravelly loamy sand, 3 to 8 percent slopes**

**Map Unit Setting**

*National map unit symbol:* 368g

*Elevation:* 7,000 to 7,700 feet

*Farmland classification:* Not prime farmland

**Map Unit Composition**

*Kettle and similar soils:* 85 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

**Description of Kettle**

**Setting**

*Landform:* Hills

*Landform position (three-dimensional):* Side slope

*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Parent material:* Sandy alluvium derived from arkose

**Typical profile**

*E - 0 to 16 inches:* gravelly loamy sand

*Bt - 16 to 40 inches:* gravelly sandy loam

*C - 40 to 60 inches:* extremely gravelly loamy sand

**Properties and qualities**

*Slope:* 3 to 8 percent

*Depth to restrictive feature:* More than 80 inches

*Drainage class:* Somewhat excessively drained

*Runoff class:* Low

*Capacity of the most limiting layer to transmit water (Ksat):* High (2.00 to 6.00 in/hr)

*Depth to water table:* More than 80 inches

*Frequency of flooding:* None

*Frequency of ponding:* None

*Available water supply, 0 to 60 inches:* Low (about 3.4 inches)

**Interpretive groups**

*Land capability classification (irrigated):* None specified

*Land capability classification (nonirrigated):* 4e

*Hydrologic Soil Group:* B

*Ecological site:* F048AY908CO - Mixed Conifer

*Hydric soil rating:* No



**Minor Components**

**Other soils**

*Percent of map unit:*  
*Hydric soil rating:* No

**Pleasant**

*Percent of map unit:*  
*Landform:* Depressions  
*Hydric soil rating:* Yes

**41—Kettle gravelly loamy sand, 8 to 40 percent slopes**

**Map Unit Setting**

*National map unit symbol:* 368h  
*Elevation:* 7,000 to 7,700 feet  
*Farmland classification:* Not prime farmland

**Map Unit Composition**

*Kettle and similar soils:* 85 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

**Description of Kettle**

**Setting**

*Landform:* Hills  
*Landform position (three-dimensional):* Side slope  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Sandy alluvium derived from arkose

**Typical profile**

*E - 0 to 16 inches:* gravelly loamy sand  
*Bt - 16 to 40 inches:* gravelly sandy loam  
*C - 40 to 60 inches:* extremely gravelly loamy sand

**Properties and qualities**

*Slope:* 8 to 40 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Somewhat excessively drained  
*Runoff class:* Medium  
*Capacity of the most limiting layer to transmit water (Ksat):* High (2.00 to 6.00 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Available water supply, 0 to 60 inches:* Low (about 3.4 inches)

**Interpretive groups**

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 7e

## Custom Soil Resource Report

*Hydrologic Soil Group:* B  
*Ecological site:* F048AY908CO - Mixed Conifer  
*Hydric soil rating:* No

### Minor Components

#### Pleasant

*Percent of map unit:*  
*Landform:* Depressions  
*Hydric soil rating:* Yes

#### Other soils

*Percent of map unit:*  
*Hydric soil rating:* No

## 71—Pring coarse sandy loam, 3 to 8 percent slopes

### Map Unit Setting

*National map unit symbol:* 369k  
*Elevation:* 6,800 to 7,600 feet  
*Farmland classification:* Not prime farmland

### Map Unit Composition

*Pring and similar soils:* 85 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

### Description of Pring

#### Setting

*Landform:* Hills  
*Landform position (three-dimensional):* Side slope  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Arkosic alluvium derived from sedimentary rock

#### Typical profile

*A - 0 to 14 inches:* coarse sandy loam  
*C - 14 to 60 inches:* gravelly sandy loam

#### Properties and qualities

*Slope:* 3 to 8 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Well drained  
*Runoff class:* Low  
*Capacity of the most limiting layer to transmit water (Ksat):* High (2.00 to 6.00 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Available water supply, 0 to 60 inches:* Low (about 6.0 inches)

## Custom Soil Resource Report

### **Interpretive groups**

*Land capability classification (irrigated):* None specified

*Land capability classification (nonirrigated):* 3e

*Hydrologic Soil Group:* B

*Ecological site:* R048AY222CO - Loamy Park

*Hydric soil rating:* No

### **Minor Components**

#### **Pleasant**

*Percent of map unit:*

*Landform:* Depressions

*Hydric soil rating:* Yes

#### **Other soils**

*Percent of map unit:*

*Hydric soil rating:* No

# References

---

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_054262](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262)
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053577](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577)
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053580](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580)
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2\\_053374](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374)
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

## Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2\\_054242](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242)

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053624](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624)

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. [http://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/nrcs142p2\\_052290.pdf](http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf)

## 8 Hydrologic Calculations

Runoff Coefficients and Percent Imperviousness Table 6-6

Colorado Springs Rainfall Intensity Duration Frequency Table 6-5

Hydrologic Calculations Summary Form SF-1 for Existing & Developed Conditions

Hydrologic Calculations Summary 5-yr Form SF-2 for Existing & Developed Conditions

Hydrologic Calculations Summary 100-yr Form SF-2 for Existing & Developed Conditions

Runoff Reduction Calculations

Runoff Reduction Map

not found?



Job No.:  
Project:

61145  
Eagle Rising Fil No. 1

label existing or  
proposed  
conditions

Date: 7/5/2022 15:10  
Calcs By: O. Ali  
Checked By:

**Time of Concentration** (Modified from Standard Form SF-1)

Sub-Basin	Sub-Basin Data				Overland			Shallow Channel				Channelized				t <sub>c</sub> Check		t <sub>c</sub> (min)
	Area (Acres)	C <sub>5</sub>	C <sub>100</sub> /CN	% Imp.	L <sub>0</sub> (ft)	S <sub>0</sub> (%)	t <sub>i</sub> (min)	L <sub>0t</sub> (ft)	S <sub>0t</sub> (ft/ft)	v <sub>0sc</sub> (ft/s)	t <sub>t</sub> (min)	L <sub>0c</sub> (ft)	S <sub>0c</sub> (ft/ft)	v <sub>0c</sub> (ft/s)	t <sub>c</sub> (min)	L (min)	t <sub>c,alt</sub> (min)	
A	4.36	0.13	0.38	6%	100	8%	9.0	176	0.032	1.3	2.3	240	0.022	3.2	1.3	516	12.9	12.6
B	1.67	0.12	0.38	6%	100	5%	10.4	238	0.050	1.6	2.5	0	0.000	0.0	0.0	338	11.9	11.9
C	3.00	0.11	0.37	4%	100	7%	9.4	160	0.088	2.1	1.3	160	0.025	3.0	0.9	420	12.3	11.6
D	0.68	0.22	0.45	20%	100	3%	11.1	250	0.040	1.4	3.0	0	0.000	0.0	0.0	350	11.9	11.9
E	0.45	0.11	0.37	5%	100	7%	9.4	76	0.079	2.0	0.6	0	0.000	0.0	0.0	176	11.0	10.0
F	3.78	0.20	0.44	18%	100	7%	8.5	0	0.000	0.0	0.0	777	0.036	3.8	3.4	877	14.9	12.0
G	6.60	0.19	0.43	15%	100	2%	12.5	343	0.011	0.7	7.9	239	0.056	4.7	0.8	682	13.8	13.8
H	3.51	0.28	0.49	28%	100	1%	14.8	618	0.055	1.6	6.3	0	0.000	0.0	0.0	718	14.0	14.0
I	5.77	0.21	0.45	16%	100	4%	10.2	382	0.050	1.6	4.1	208	0.058	4.7	0.7	690	13.8	13.8
J	3.24	0.16	0.41	11%	100	7%	8.9	144	0.076	1.9	1.2	160	0.050	4.1	0.7	404	12.2	10.8
K	2.22	0.19	0.43	14%	100	5%	9.7	0	0.000	0.0	0.0	413	0.024	2.7	2.6	513	12.9	12.3

Job No.: 61145

Project: Eagle Rising Fil No. 1

Design Storm: 5-Year Storm (20% Probability)

Jurisdiction: DCM

label existing or proposed conditions

Date: 7/5/2022 15:10

Calcs By: O. Ali

Checked By:

Sub-Basin and Combined Flows (Modified from Standard Form SF-2)

DP	Sub-Basin	Area (Acres)	C5	Direct Runoff				Combined Runoff				Streetflow			Pipe Flow					Travel Time		
				t <sub>c</sub> (min)	CA (Acres)	I5 (in/hr)	Q5 (cfs)	t <sub>c</sub> (min)	CA (Acres)	I5 (in/hr)	Q5 (cfs)	Slope (%)	Length (ft)	Q (cfs)	Q (cfs)	Slope (%)	Mnngs n	Length (ft)	D <sub>Pipe</sub> (in)	Length (ft)	V <sub>Osc</sub> (ft/s)	t <sub>t</sub> (min)
DP2	A	4.36	0.13	12.6	0.55	3.78	2.1															
	B	1.67	0.12	11.9	0.21	3.87	0.8															
DP3	A, B, OS-B1A, OS-B1B	6.03	0.13					12.6	0.76	3.78	68.9											
	C	3.00	0.11	11.6	0.33	3.91	1.3															
DP1	DP2, C	9.03	0.12					13.7	1.08	3.65	70.0											
DP4	D	0.68	0.22	11.9	0.15	3.86	0.6															
DP5	E	0.45	0.11	10.0	0.05	4.13	0.2															
	F	3.78	0.20	12.0	0.77	3.86	3.0															
DP6	F, OS-B1C	3.78	0.20					12.0	0.77	3.86	4.7											
DP7	H	3.51	0.28	14.0	0.98	3.63	3.6															
	G	6.60	0.19	13.8	1.24	3.65	4.5															
DP8	G, OS-B1D	6.60	0.19					13.8	1.24	3.65	10.5											
	I	5.77	0.21	13.8	1.22	3.64	4.4															
DP9	I, OS-B1E, OS-B3A	5.77	0.21					13.8	1.22	3.64	23.4											
	J	3.24	0.16	10.8	0.53	4.02	2.1															
DP10	J, I, OS-B1E, OS-B3A	9.01	0.19					14.9	1.75	3.53	25.2											
	K	2.22	0.19	12.3	0.41	3.82	1.6															
	K, OS-B3B	2.22	0.19					12.3	0.41	3.82	3.7											

DCM:  $I = C1 * \ln(tc) + C2$

C1: 1.5

C1: 7.583



Job No.: 61145

Project: Eagle Rising Fil No. 1

Design Storm: 100-Year Storm (1% Probability)

Jurisdiction: DCM

label existing or proposed conditions

Date: 7/5/2022 15:10

Calcs By: O. Ali

Checked By:

Sub-Basin and Combined Flows (Modified from Standard Form SF-2)

DP	Sub-Basin	Area (Acres)	C100	Direct Runoff				Combined Runoff				Streetflow			Pipe Flow					Travel Time		
				t <sub>c</sub> (min)	CA (Acres)	I100 (in/hr)	Q100 (cfs)	t <sub>c</sub> (min)	CA (Acres)	I100 (in/hr)	Q100 (cfs)	Slope (%)	Length (ft)	Q (cfs)	Q (cfs)	Slope (%)	Mnngs n	Length (ft)	D <sub>Pipe</sub> (in)	Length (ft)	V <sub>osc</sub> (ft/s)	t <sub>t</sub> (min)
DP2	A	4.36	0.38	12.6	1.67	6.34	10.6															
	B	1.67	0.38	11.9	0.64	6.50	4.1															
DP3	A,B, OS-B1A, OS-B1B	6.03	0.38					12.6	2.31	6.34	169.7											
	C	3.00	0.37	11.6	1.11	6.56	7.3															
DP1	DP2, C	9.03	0.38					13.7	3.42	6.13	176.0											
DP4	D	0.68	0.45	11.9	0.30	6.48	2.0															
DP5	E	0.45	0.37	10.0	0.17	6.93	1.2															
	F	3.78	0.44	12.0	1.65	6.48	10.7															
DP6	F, OS-B1C	3.78	0.44					12.0	1.65	6.48	14.7											
DP7	H	3.51	0.49	14.0	1.72	6.09	10.5															
	G	6.60	0.43	13.8	2.82	6.12	17.3															
DP8	G, OS-B1D	6.60	0.43					13.8	2.82	6.12	31.3											
	I	5.77	0.45	13.8	2.58	6.11	15.8															
DP9	I, OS-B1E, OS-B3A	5.77	0.45					13.8	2.58	6.11	60.8											
	J	3.24	0.41	10.8	1.33	6.74	9.0															
DP10	J, I, OS-B1E, OS-B3A	9.01	0.43					14.9	3.91	5.93	68.2											
	K	2.22	0.43	12.3	0.95	6.41	6.1															
	K, OS-B3B	2.22	0.43					12.3	0.95	6.41	11.2											

DCM:  $I = C1 * \ln(tc) + C2$

C1: 2.52

C1: 12.735

## Sub-Basin A Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Paved	9,398	0.22	0.89	0.9	0.92	0.94	0.95	0.96	100%
Roofs	1,676	0.04	0.71	0.73	0.75	0.78	0.8	0.81	90%
Pasture/Meadow	178,686	4.10	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>189,760</b>	<b>4.36</b>	<b>0.07</b>	<b>0.13</b>	<b>0.19</b>	<b>0.29</b>	<b>0.34</b>	<b>0.38</b>	<b>5.7%</b>
	189760		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns			
	$L_{max,Overland}$	100 ft			$C_v$	7
	L (ft)	$\Delta Z_0$ (ft)	$S_0$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)
Total	516	19	-	-	-	-
Initial Time	100	7.5	0.075	-	9.0	12.9 DCM Eq. 6-8
Shallow Channel	176	5.7	0.032	1.3	2.3	- DCM Eq. 6-9
Channelized	240	5.3	0.022	3.2	1.3	- V-Ditch
				$t_c$	<b>12.6 min.</b>	

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
Intensity (in/hr)	3.02	3.78	4.41	5.04	5.67	6.34
Runoff (cfs)	0.9	2.1	3.7	6.3	8.3	10.6
Release Rates (cfs/ac)	-	-	-	-	-	-
Allowed Release (cfs)	0.9	2.1	3.7	6.3	8.3	10.6

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin B Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	68,331	1.57	0.02	0.08	0.15	0.25	0.3	0.35	0%
Roofs	2,550	0.06	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	1,840	0.04	0.89	0.9	0.92	0.94	0.95	0.96	100%
<b>Combined</b>	<b>72,721</b>	<b>1.67</b>	<b>0.07</b>	<b>0.12</b>	<b>0.19</b>	<b>0.29</b>	<b>0.33</b>	<b>0.38</b>	<b>5.7%</b>

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns			
	$L_{max,Overland}$	100 ft			$C_v$	7
	L (ft)	$\Delta Z_0$ (ft)	$S_0$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)
Total	338	17	-	-	-	-
Initial Time	100	5	0.050	-	10.4	11.9 DCM Eq. 6-8
Shallow Channel	238	12	0.050	1.6	2.5	- DCM Eq. 6-9
Channelized			0.000	0.0	0.0	- V-Ditch
				$t_c$	<b>11.9 min.</b>	

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.09	3.87	4.52	5.16	5.81	6.50
<b>Runoff (cfs)</b>	0.3	<b>0.8</b>	1.4	2.5	3.2	<b>4.1</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	0.3	<b>0.8</b>	1.4	2.5	3.2	<b>4.1</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin C Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	125,610	2.88	0.02	0.08	0.15	0.25	0.3	0.35	0%
Roofs	3,398	0.08	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	1,840	0.04	0.89	0.9	0.92	0.94	0.95	0.96	100%
<b>Combined</b>	<b>130,848</b>	<b>3.00</b>	<b>0.05</b>	<b>0.11</b>	<b>0.18</b>	<b>0.27</b>	<b>0.32</b>	<b>0.37</b>	<b>3.7%</b>
	130848		0						

### Basin Travel Time

Shallow Channel Ground Cover Short Pasture/Lawns

	$L_{max,Overland}$	100 ft			$C_v$	7	
	L (ft)	$\Delta Z_0$ (ft)	$S_0$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)	
Total	420	25	-	-	-	-	
Initial Time	100	7	0.070	-	9.4	12.3	DCM Eq. 6-8
Shallow Channel	160	14	0.088	2.1	1.3	-	DCM Eq. 6-9
Channelized	160	4	0.025	3.0	0.9	-	V-Ditch
				$t_c$	<b>11.6 min.</b>		

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.12	3.91	4.56	5.21	5.86	6.56
<b>Runoff (cfs)</b>	0.5	1.3	2.4	4.3	5.7	7.3
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	0.5	1.3	2.4	4.3	5.7	7.3

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin D Runoff Calculations (DP1)

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	3,047	0.07	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	57	0.00	0.89	0.9	0.92	0.94	0.95	0.96	100%
Pasture/Meadow	22,578	0.52	0.02	0.08	0.15	0.25	0.3	0.35	0%
Gravel	4,014	0.09	0.57	0.59	0.63	0.66	0.68	0.7	80%
<b>Combined</b>	<b>29,696</b>	<b>0.68</b>	<b>0.17</b>	<b>0.22</b>	<b>0.28</b>	<b>0.36</b>	<b>0.40</b>	<b>0.45</b>	<b>20.2%</b>
	29696		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns		C <sub>v</sub>		7	
	L <sub>max,Overland</sub> (ft)	ΔZ <sub>0</sub> (ft)	S <sub>0</sub> (ft/ft)	v (ft/s)	t (min)	t <sub>Alt</sub> (min)		
Total	350	13	-	-	-	-	-	-
Initial Time	100	3	0.030	-	11.1	11.9	DCM Eq. 6-8	
Shallow Channel	250	10	0.040	1.4	3.0	-	DCM Eq. 6-9	
Channelized			0.000	0.0	0.0	-	V-Ditch	
					<b>t<sub>c</sub></b>	<b>11.9 min.</b>		

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.08	3.86	4.51	5.15	5.79	6.48
<b>Runoff (cfs)</b>	0.4	<b>0.6</b>	0.9	1.3	1.6	<b>2.0</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	0.4	<b>0.6</b>	0.9	1.3	1.6	<b>2.0</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin E Runoff Calculations (DP4)

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	18,398	0.42	0.02	0.08	0.15	0.25	0.3	0.35	0%
Gravel	1,333	0.03	0.57	0.59	0.63	0.66	0.68	0.7	80%
<b>Combined</b>	<b>19,731</b>	<b>0.45</b>	<b>0.06</b>	<b>0.11</b>	<b>0.18</b>	<b>0.28</b>	<b>0.33</b>	<b>0.37</b>	<b>5.4%</b>
	19731		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns		C <sub>v</sub>		7	
	L <sub>max,Overland</sub> (ft)	ΔZ <sub>0</sub> (ft)	S <sub>0</sub> (ft/ft)	v (ft/s)	t (min)	t <sub>Alt</sub> (min)		
Total	176	13	-	-	-	-	-	-
Initial Time	100	7	0.070	-	9.4	11.0	DCM Eq. 6-8	
Shallow Channel	76	6	0.079	2.0	0.6	-	DCM Eq. 6-9	
Channelized			0.000	0.0	0.0	-	V-Ditch	
					<b>t<sub>c</sub></b>	<b>10.0 min.</b>		

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.29	4.13	4.82	5.50	6.19	6.93
<b>Runoff (cfs)</b>	0.1	<b>0.2</b>	0.4	0.7	0.9	<b>1.2</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	0.1	<b>0.2</b>	0.4	0.7	0.9	<b>1.2</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin F Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	129,271	2.97	0.02	0.08	0.15	0.25	0.3	0.35	0%
Roofs	15,215	0.35	0.71	0.73	0.75	0.78	0.8	0.81	90%
Gravel	20,328	0.47	0.57	0.59	0.63	0.66	0.68	0.7	80%
<b>Combined</b>	<b>164,814</b>	<b>3.78</b>	<b>0.15</b>	<b>0.20</b>	<b>0.26</b>	<b>0.35</b>	<b>0.39</b>	<b>0.44</b>	<b>18.2%</b>
	164814		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns			
	$L_{max,Overland}$	100 ft			$C_v$	7
	L (ft)	$\Delta Z_0$ (ft)	$S_0$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)
Total	877	35	-	-	-	-
Initial Time	100	7	0.070	-	8.5	14.9 DCM Eq. 6-8
Shallow Channel			0.000	0.0	0.0	- DCM Eq. 6-9
Channelized	777	28	0.036	3.8	3.4	- V-Ditch
				$t_c$	<b>12.0 min.</b>	

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.08	3.86	4.50	5.15	5.79	6.48
<b>Runoff (cfs)</b>	1.8	<b>3.0</b>	4.5	6.8	8.6	<b>10.7</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	1.8	<b>3.0</b>	4.5	6.8	8.6	<b>10.7</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin G Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	239,106	5.49	0.02	0.08	0.15	0.25	0.3	0.35	0%
Roofs	9,864	0.23	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	16,181	0.37	0.89	0.9	0.92	0.94	0.95	0.96	100%
Gravel	22,516	0.52	0.57	0.59	0.63	0.66	0.68	0.7	80%
<b>Combined</b>	<b>287,667</b>	<b>6.60</b>	<b>0.14</b>	<b>0.19</b>	<b>0.25</b>	<b>0.34</b>	<b>0.38</b>	<b>0.43</b>	<b>15.0%</b>
	287667		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns			
	$L_{max,Overland}$	100 ft			$C_v$	7
	L (ft)	$\Delta Z_o$ (ft)	$S_o$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)
Total	682	20	-	-	-	-
Initial Time	100	2.3	0.023	-	12.5	13.8 DCM Eq. 6-8
Shallow Channel	343	3.7	0.011	0.7	7.9	- DCM Eq. 6-9
Channelized	239	13.5	0.056	4.7	0.8	- V-Ditch
				$t_c$	<b>13.8 min.</b>	

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.91	3.65	4.26	4.86	5.47	6.12
<b>Runoff (cfs)</b>	2.6	4.5	7.1	10.9	13.9	17.3
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	2.6	4.5	7.1	10.9	13.9	17.3

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes



## Sub-Basin H Runoff Calculations (DP6)

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	102,601	2.36	0.02	0.08	0.15	0.25	0.3	0.35	0%
Roofs	21,789	0.50	0.71	0.73	0.75	0.78	0.8	0.81	90%
Gravel	22,550	0.52	0.57	0.59	0.63	0.66	0.68	0.7	80%
Paved	5,904	0.14	0.89	0.9	0.92	0.94	0.95	0.96	100%
<b>Combined</b>	<b>152,844</b>	<b>3.51</b>	<b>0.23</b>	<b>0.28</b>	<b>0.34</b>	<b>0.41</b>	<b>0.45</b>	<b>0.49</b>	<b>28.5%</b>
	152844		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns		C <sub>v</sub>		7	
	L <sub>max,Overland</sub> (ft)	ΔZ <sub>0</sub> (ft)	S <sub>0</sub> (ft/ft)	v (ft/s)	t (min)	t <sub>Alt</sub> (min)		
Total	718	35	-	-	-	-	-	-
Initial Time	100	1	0.010	-	14.8	14.0	DCM Eq. 6-8	
Shallow Channel	618	34	0.055	1.6	6.3	-	DCM Eq. 6-9	
Channelized			0.000	0.0	0.0	-	V-Ditch	
					<b>t<sub>c</sub></b>	<b>14.0 min.</b>		

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.90	3.63	4.23	4.83	5.44	6.09
<b>Runoff (cfs)</b>	2.4	3.6	5.0	7.0	8.6	10.5
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	2.4	3.6	5.0	7.0	8.6	10.5

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin I Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	209,024	4.80	0.02	0.08	0.15	0.25	0.3	0.35	0%
Paved	32,096	0.74	0.89	0.9	0.92	0.94	0.95	0.96	100%
Roofs	10,200	0.23	0.71	0.73	0.75	0.78	0.8	0.81	90%
<b>Combined</b>	<b>251,320</b>	<b>5.77</b>	<b>0.16</b>	<b>0.21</b>	<b>0.27</b>	<b>0.36</b>	<b>0.40</b>	<b>0.45</b>	<b>16.4%</b>
	251320		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns			
	$L_{max,Overland}$	100 ft			$C_v$	7
	L (ft)	$\Delta Z_o$ (ft)	$S_o$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)
Total	690	35	-	-	-	-
Initial Time	100	4	0.040	-	10.2	13.8 DCM Eq. 6-8
Shallow Channel	382	19	0.050	1.6	4.1	- DCM Eq. 6-9
Channelized	208	12	0.058	4.7	0.7	- V-Ditch
				$t_c$	<b>13.8 min.</b>	

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.91	3.64	4.25	4.86	5.46	6.11
<b>Runoff (cfs)</b>	2.7	4.4	6.7	10.1	12.7	15.8
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	2.7	4.4	6.7	10.1	12.7	15.8

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin J Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	125,451	2.88	0.02	0.08	0.15	0.25	0.3	0.35	0%
Paved	10,526	0.24	0.89	0.9	0.92	0.94	0.95	0.96	100%
Roofs	5,100	0.12	0.71	0.73	0.75	0.78	0.8	0.81	90%
<b>Combined</b>	<b>141,077</b>	<b>3.24</b>	<b>0.11</b>	<b>0.16</b>	<b>0.23</b>	<b>0.32</b>	<b>0.37</b>	<b>0.41</b>	<b>10.7%</b>
	141077		0						

### Basin Travel Time

	L (ft)	$\Delta Z_0$ (ft)	$S_0$ (ft/ft)	v (ft/s)	t (min)	$t_{Alt}$ (min)	
Shallow Channel	100	26	-	-	-	-	
Ground Cover	100	7	0.070	-	8.9	12.2	DCM Eq. 6-8
Short Pasture/Lawns	144	11	0.076	1.9	1.2	-	DCM Eq. 6-9
Channelized	160	8	0.050	4.1	0.7	-	V-Ditch
<b>Total</b>	<b>404</b>	<b>26</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>-</b>	
<b>Initial Time</b>	<b>100</b>	<b>7</b>	<b>0.070</b>	<b>-</b>	<b>8.9</b>	<b>12.2</b>	<b>DCM Eq. 6-8</b>
<b>Shallow Channel</b>	<b>144</b>	<b>11</b>	<b>0.076</b>	<b>1.9</b>	<b>1.2</b>	<b>-</b>	<b>DCM Eq. 6-9</b>
<b>Channelized</b>	<b>160</b>	<b>8</b>	<b>0.050</b>	<b>4.1</b>	<b>0.7</b>	<b>-</b>	<b>V-Ditch</b>
				<b><math>t_c</math></b>	<b>10.8 min.</b>		

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.21	4.02	4.69	5.36	6.03	6.74
<b>Runoff (cfs)</b>	1.1	2.1	3.5	5.6	7.2	9.0
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	1.1	2.1	3.5	5.6	7.2	9.0

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Sub-Basin K Runoff Calculations

Job No.: 61145  
 Project: Eagle Rising Fil No. 1  
 Jurisdiction: DCM  
 Runoff Coefficient: Surface Type

Date: 7/5/2022 15:10  
 Calcs by: O. Ali  
 Checked by: \_\_\_\_\_  
 Soil Type: B  
 Urbanization: Urban

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Pasture/Meadow	83,054	1.91	0.02	0.08	0.15	0.25	0.3	0.35	0%
Paved	8,465	0.19	0.89	0.9	0.92	0.94	0.95	0.96	100%
Roofs	5,100	0.12	0.71	0.73	0.75	0.78	0.8	0.81	90%
<b>Combined</b>	<b>96,619</b>	<b>2.22</b>	<b>0.13</b>	<b>0.19</b>	<b>0.25</b>	<b>0.34</b>	<b>0.38</b>	<b>0.43</b>	<b>13.5%</b>
	96619		0						

### Basin Travel Time

	Shallow Channel Ground Cover		Short Pasture/Lawns		C <sub>v</sub>		7	
	L <sub>max,Overland</sub> (ft)	ΔZ <sub>0</sub> (ft)	S <sub>0</sub> (ft/ft)	v (ft/s)	t (min)	t <sub>Alt</sub> (min)		
Total	513	15	-	-	-	-	-	-
Initial Time	100	5	0.050	-	9.7	12.9	DCM Eq. 6-8	
Shallow Channel			0.000	0.0	0.0	-	DCM Eq. 6-9	
Channelized	413	10	0.024	2.7	2.6	-	V-Ditch	
				<b>t<sub>c</sub></b>	<b>12.3 min.</b>			

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.05	3.82	4.46	5.09	5.73	6.41
<b>Runoff (cfs)</b>	0.9	1.6	2.5	3.8	4.9	6.1
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	0.9	1.6	2.5	3.8	4.9	6.1

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

## Combined Sub-Basin Runoff Calculations (DP2)

Includes Basins A B

Job No.:	<u>61145</u>	Date:	<u>7/5/2022 15:10</u>
Project:	<u>Eagle Rising Fil No. 1</u>	Calcs by:	<u>O. Ali</u>
Jurisdiction	<u>DCM</u>	Checked by:	_____
Runoff Coefficient	<u>Surface Type</u>	Soil Type	<u>B</u>
		Urbanization	<u>Urban</u>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	4,226	0.10	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	11,238	0.26	0.89	0.9	0.92	0.94	0.95	0.96	100%
Pasture/Meadow	247,017	5.67	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>262,481</b>	<b>6.03</b>	<b>0.07</b>	<b>0.13</b>	<b>0.19</b>	<b>0.29</b>	<b>0.34</b>	<b>0.38</b>	<b>5.7%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)
Furthest Reach	A	-	516	19	-	-	-	-	12.6
Channelized-1									
Channelized-2									
Channelized-3									
Total			516	19					
								<b>t<sub>c</sub> (min)</b>	<b>12.6</b>

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B1A, OS-B1B

Q<sub>Minor</sub> 66 (cfs) - 5-year Storm  
 Q<sub>Major</sub> 155 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.02	3.78	4.41	5.04	5.67	6.34
<b>Site Runoff (cfs)</b>	1.24	<b>2.86</b>	5.12	8.74	11.47	<b>14.66</b>
<b>OffSite Runoff (cfs)</b>	-	<b>66.00</b>	-	-	-	<b>155.00</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>68.9</b>	-	-	-	<b>169.7</b>

DCM: I = C1 \* ln(tc) + C2

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.

## Combined Sub-Basin Runoff Calculations (DP3)

Includes Basins A B C

Job No.:	<b>61145</b>	Date:	<b>7/5/2022 15:10</b>
Project:	<b>Eagle Rising Fil No. 1</b>	Calcs by:	<b>O. Ali</b>
Jurisdiction	<b>DCM</b>	Checked by:	
Runoff Coefficient	<b>Surface Type</b>	Soil Type	<b>B</b>
		Urbanization	<b>Urban</b>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	7,624	0.18	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	13,078	0.30	0.89	0.9	0.92	0.94	0.95	0.96	100%
Pasture/Meadow	372,627	8.55	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>393,329</b>	<b>9.03</b>	<b>0.06</b>	<b>0.12</b>	<b>0.19</b>	<b>0.28</b>	<b>0.33</b>	<b>0.38</b>	<b>5.1%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)
Furthest Reach	DP2	-	516	19	-	-	-	-	12.6
Channelized-1	V-Ditch	2	246	6	15	0	2	3.8	1.1
Channelized-2									
Channelized-3									
Total			762	25					

2 = Natural, Winding, minimal vegetation/shallow grass

**t<sub>c</sub> (min) 13.7**

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B1A, OS-B1B

Q<sub>Minor</sub> 66 (cfs) - 5-year Storm  
 Q<sub>Major</sub> 155 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.92	3.65	4.26	4.87	5.48	6.13
<b>Site Runoff (cfs)</b>	1.64	<b>3.96</b>	7.21	12.46	16.40	<b>21.01</b>
<b>OffSite Runoff (cfs)</b>	-	<b>66.00</b>	-	-	-	<b>155.00</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>70.0</b>	-	-	-	<b>176.0</b>

DCM: I = C1 \* ln(tc) + C2

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.

## Combined Sub-Basin Runoff Calculations (DP5)

Includes Basins F

Job No.:	<b>61145</b>	Date:	<b>7/5/2022 15:10</b>
Project:	<b>Eagle Rising Fil No. 1</b>	Calcs by:	<b>O. Ali</b>
Jurisdiction	<b>DCM</b>	Checked by:	
Runoff Coefficient	<b>Surface Type</b>	Soil Type	<b>B</b>
		Urbanization	<b>Urban</b>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	15,215	0.35	0.71	0.73	0.75	0.78	0.8	0.81	90%
Gravel	20,328	0.47	0.57	0.59	0.63	0.66	0.68	0.7	80%
Pasture/Meadow	129,271	2.97	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>164,814</b>	<b>3.78</b>	<b>0.15</b>	<b>0.20</b>	<b>0.26</b>	<b>0.35</b>	<b>0.39</b>	<b>0.44</b>	<b>18.2%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)
Furthest Reach	F	-	877	35	-	-	-	-	12.0
Channelized-1									
Channelized-2									
Channelized-3									
Total			877	35					
							<b>t<sub>c</sub> (min)</b>		<b>12.0</b>

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B1C

Q<sub>Minor</sub> 1.7 (cfs) - 5-year Storm

Q<sub>Major</sub> 4 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.08	3.86	4.50	5.15	5.79	6.48
<b>Site Runoff (cfs)</b>	1.77	<b>2.96</b>	4.51	6.81	8.61	<b>10.68</b>
<b>OffSite Runoff (cfs)</b>	-	<b>1.70</b>	-	-	-	<b>4.00</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>4.7</b>	-	-	-	<b>14.7</b>

DCM: I = C1 \* ln(tc) + C2

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.

## Combined Sub-Basin Runoff Calculations (DP7)

Includes Basins G

Job No.:	<b>61145</b>	Date:	<b>7/5/2022 15:10</b>
Project:	<b>Eagle Rising Fil No. 1</b>	Calcs by:	<b>O. Ali</b>
Jurisdiction	<b>DCM</b>	Checked by:	
Runoff Coefficient	<b>Surface Type</b>	Soil Type	<b>B</b>
		Urbanization	<b>Urban</b>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	9,864	0.23	0.71	0.73	0.75	0.78	0.8	0.81	90%
Gravel	22,516	0.52	0.57	0.59	0.63	0.66	0.68	0.7	80%
Pasture/Meadow	239,106	5.49	0.02	0.08	0.15	0.25	0.3	0.35	0%
Paved	16,181	0.37	0.89	0.9	0.92	0.94	0.95	0.96	100%
<b>Combined</b>	<b>287,667</b>	<b>6.60</b>	<b>0.14</b>	<b>0.19</b>	<b>0.25</b>	<b>0.34</b>	<b>0.38</b>	<b>0.43</b>	<b>15.0%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)
Furthest Reach	G	-	682	20	-	-	-	-	13.8
Channelized-1									
Channelized-2									
Channelized-3									
Total			682	20					
							<b>t<sub>c</sub> (min)</b>		<b>13.8</b>

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B1D

Q<sub>Minor</sub> 6 (cfs) - 5-year Storm  
 Q<sub>Major</sub> 14 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.91	3.65	4.26	4.86	5.47	6.12
<b>Site Runoff (cfs)</b>	2.61	<b>4.54</b>	7.07	10.89	13.85	<b>17.29</b>
<b>OffSite Runoff (cfs)</b>	-	<b>6.00</b>	-	-	-	<b>14.00</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>10.5</b>	-	-	-	<b>31.3</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.



## Combined Sub-Basin Runoff Calculations (DP8)

Includes Basins I

Job No.:	<b>61145</b>	Date:	<b>7/5/2022 15:10</b>
Project:	<b>Eagle Rising Fil No. 1</b>	Calcs by:	<b>O. Ali</b>
Jurisdiction	<b>DCM</b>	Checked by:	
Runoff Coefficient	<b>Surface Type</b>	Soil Type	<b>B</b>
		Urbanization	<b>Urban</b>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	10,200	0.23	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	32,096	0.74	0.89	0.9	0.92	0.94	0.95	0.96	100%
Pasture/Meadow	209,024	4.80	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>251,320</b>	<b>5.77</b>	<b>0.16</b>	<b>0.21</b>	<b>0.27</b>	<b>0.36</b>	<b>0.40</b>	<b>0.45</b>	<b>16.4%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)
Furthest Reach	I	-	690	35	-	-	-	-	13.8
Channelized-1									
Channelized-2									
Channelized-3									
Total			690	35					
								<b>t<sub>c</sub> (min)</b>	<b>13.8</b>

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B1E, OS-B3A

Q<sub>Minor</sub> 19 (cfs) - 5-year Storm  
 Q<sub>Major</sub> 45 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.91	3.64	4.25	4.86	5.46	6.11
<b>Site Runoff (cfs)</b>	2.67	<b>4.44</b>	6.69	10.08	12.71	<b>15.75</b>
<b>OffSite Runoff (cfs)</b>	-	<b>19.00</b>	-	-	-	<b>45.00</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>23.4</b>	-	-	-	<b>60.8</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.

## Combined Sub-Basin Runoff Calculations (DP9)

Includes Basins I J

Job No.:	<b>61145</b>	Date:	<b>7/5/2022 15:10</b>
Project:	<b>Eagle Rising Fil No. 1</b>	Calcs by:	<b>O. Ali</b>
Jurisdiction	<b>DCM</b>	Checked by:	
Runoff Coefficient	<b>Surface Type</b>	Soil Type	<b>B</b>
		Urbanization	<b>Urban</b>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	15,300	0.35	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	42,622	0.98	0.89	0.9	0.92	0.94	0.95	0.96	100%
Pasture/Meadow	334,475	7.68	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>392,397</b>	<b>9.01</b>	<b>0.14</b>	<b>0.19</b>	<b>0.26</b>	<b>0.35</b>	<b>0.39</b>	<b>0.43</b>	<b>14.4%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)	
Furthest Reach	I	-	690	35	-	-	-	-	13.8	
Channelized-1	V-Ditch	2	319	15	16	0	2	4.9	1.1	
Channelized-2										
Channelized-3										
Total			1,009	50						
	2 = Natural, Winding, minimal vegetation/shallow grass								<b>t<sub>c</sub> (min)</b>	<b>14.9</b>

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B1E, OS-B3A

Q<sub>Minor</sub> 19 (cfs) - 5-year Storm  
 Q<sub>Major</sub> 45 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	2.82	3.53	4.12	4.71	5.29	5.93
<b>Site Runoff (cfs)</b>	3.59	<b>6.18</b>	9.54	14.65	18.61	<b>23.18</b>
<b>OffSite Runoff (cfs)</b>	-	<b>19.00</b>	-	-	-	<b>45.00</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>25.2</b>	-	-	-	<b>68.2</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.

## Combined Sub-Basin Runoff Calculations (DP10)

Includes Basins K

Job No.:	<b>61145</b>	Date:	<b>7/5/2022 15:10</b>
Project:	<b>Eagle Rising Fil No. 1</b>	Calcs by:	<b>O. Ali</b>
Jurisdiction	<b>DCM</b>	Checked by:	
Runoff Coefficient	<b>Surface Type</b>	Soil Type	<b>B</b>
		Urbanization	<b>Urban</b>

### Basin Land Use Characteristics

Surface	Area		Runoff Coefficient						% Imperv.
	(SF)	(Acres)	C2	C5	C10	C25	C50	C100	
Roofs	5,100	0.12	0.71	0.73	0.75	0.78	0.8	0.81	90%
Paved	8,465	0.19	0.89	0.9	0.92	0.94	0.95	0.96	100%
Pasture/Meadow	83,054	1.91	0.02	0.08	0.15	0.25	0.3	0.35	0%
<b>Combined</b>	<b>96,619</b>	<b>2.22</b>	<b>0.13</b>	<b>0.19</b>	<b>0.25</b>	<b>0.34</b>	<b>0.38</b>	<b>0.43</b>	<b>13.5%</b>

### Basin Travel Time

	Sub-basin or Channel Type	Material Type	L (ft)	Elev. ΔZ <sub>0</sub> (ft)	Q <sub>i</sub> (cfs)	Base or Dia (ft)	Sides z:1 (ft/ft)	v (ft/s)	t (min)
Furthest Reach	K	-	513	15	-	-	-	-	12.3
Channelized-1									
Channelized-2									
Channelized-3									
Total			513	15					
								<b>t<sub>c</sub> (min)</b>	<b>12.3</b>

### Contributing Offsite Flows (Added to Runoff and Allowed Release, below.)

Contributing Basins/Areas OS-B3B

Q<sub>Minor</sub> 2.1 (cfs) - 5-year Storm  
 Q<sub>Major</sub> 5.1 (cfs) - 100-year Storm

### Rainfall Intensity & Runoff

	2-Yr	5-Yr	10-Yr	25-Yr	50-Yr	100-Yr
<b>Intensity (in/hr)</b>	3.05	3.82	4.46	5.09	5.73	6.41
<b>Site Runoff (cfs)</b>	0.90	<b>1.58</b>	2.46	3.82	4.87	<b>6.08</b>
<b>OffSite Runoff (cfs)</b>	-	<b>2.10</b>	-	-	-	<b>5.10</b>
<b>Release Rates (cfs/ac)</b>	-	-	-	-	-	-
<b>Allowed Release (cfs)</b>	-	<b>3.7</b>	-	-	-	<b>11.2</b>

DCM:  $I = C1 * \ln(tc) + C2$

C1	1.19	1.5	1.75	2	2.25	2.52
C2	6.035	7.583	8.847	10.111	11.375	12.735

### Notes

Runoff from Offsite basins have been assumed constant, despite additional times of concentration.



# EAGLE RISING FINAL DRAINAGE REPORT

BASIN	TOTAL AREA (Acres)
A1	4.9
A2	1.6
B	3.1
C	1.2
D	10.7
E1	3.8
E2	7.5
F	8.8
G	2.6
H	4.1
I	1.6
J	2.7
K	2.8
L	5.3
EX-A1	4.9
EX-A2	1.6
EX-B	13.1
EX-C1	3.8
EX-C2	7.5
EX-D	9.0
EX-E	2.6
EX-F	7.5
EX-G	2.8
EX-H	5.3
OS-B1A	24.9
OS-B1B	41.0
OS-B1C	1.8
OS-B1D	6.0
OS-B1E	10.1
OS-B3A	9.1
OS-B3B	2.3
OS-B3C	5.7
OS-B4A	5.2
OS-B4B	8.1
OS-B4C	13.4

# EAGLE RISING FINAL DRAINAGE REPORT (Area Drainage Summary)

BASIN	AREA TOTAL (Acre)			OVERLAND					STREET / CHANNEL FLOW					Time of Travel (T <sub>T</sub> )		INTENSITY *		TOTAL FLOWS	
	C <sub>s</sub>	C <sub>100</sub>	C <sub>2</sub>	Length (ft)	Height (ft)	T <sub>c</sub> (min)	Length (ft)	Slope (%)	Velocity (ft/s)	T <sub>c</sub> (min)	TOTAL (min)	I <sub>1</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>s</sub> (cfs)	Q <sub>100</sub> (cfs)				
<i>A1</i> (Onsite)	0.30	0.40	0.25	220	24	10.7	0	0.0%	0.0	0.0	10.7	4.0	7.1	3.9	13.9				
<i>A2</i> (Onsite)	0.30	0.40	0.25	220	24	10.7	0	0.0%	0.1	0.0	10.7	4.0	7.1	1.9	4.5				
<i>B</i>	0.30	0.40	0.25	790	26	13.1	160	5.0%	7.8	0.3	13.5	3.6	6.5	3.4	8.0				
<i>C</i>	0.30	0.40	0.25	160	13	10.1	70	1.2%	3.8	0.3	10.4	4.0	7.2	1.5	3.5				
<i>D</i>	0.30	0.40	0.25	235	20	12.0	720	3.3%	6.5	1.8	13.9	3.6	6.4	11.5	27.3				
<i>E1</i>	0.30	0.40	0.25	100	10	7.4	800	4.0%	7.0	1.9	9.3	4.2	7.5	4.8	11.4				
<i>E2</i>	0.30	0.40	0.25	250	6	18.8	400	4.0%	7.0	1.0	19.8	3.0	5.4	6.8	16.2				
<i>F</i>	0.30	0.40	0.25	300	11	17.9	600	3.7%	6.7	1.5	19.4	3.1	5.4	8.1	19.2				
<i>G</i>	0.30	0.40	0.25	135	10	9.5	190	6.3%	8.8	0.4	9.9	4.1	7.3	3.2	7.6				
<i>H</i>	0.30	0.40	0.25	300	22	14.3	160	3.8%	6.8	0.4	14.7	3.5	6.2	4.3	10.2				
<i>I</i>	0.30	0.40	0.25	125	12	8.4	115	5.2%	8.0	0.2	8.7	4.3	7.7	2.1	4.9				
<i>J</i>	0.30	0.40	0.25	210	16	11.8	185	6.5%	8.9	0.3	12.1	3.8	6.8	3.1	7.3				

label existing or proposed conditions  
←

BASIN	AREA TOTAL (Acres)		OVERLAND						STREET / CHANNEL FLOW						Time of Travel (T <sub>c</sub> )		INTENSITY *			TOTAL FLOWS	
	C <sub>s</sub>	C <sub>100</sub>	C <sub>s</sub>	Length (ft)	Height (ft)	T <sub>c</sub> (min)	Length (ft)	Shape (%)	Velocity (fps)	T <sub>c</sub> (min)	TOTAL (min)	I <sub>s</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>s</sub> (c.f.s.)	Q <sub>100</sub> (c.f.s.)						
<b>K</b>	0.90	0.95	0.25	80	12	5.8	0	0.0%	0.0	0.0	5.8	4.9	8.7	12.4	23.2						
<b>L</b>	0.30	0.40	0.25	300	14	16.6	300	2.4%	5.4	1.5	18.1	3.2	5.6	5.1	12.0						
<b>EX-A1</b>	0.30	0.40	0.25	220	24	10.7	0	0.0%	0.1	0.0	10.7	4.0	7.1	5.9	15.9						
<b>EX-A2</b>	0.30	0.40	0.25	220	24	10.7	0	0.0%	0.1	0.0	10.7	4.0	7.1	1.9	4.6						
<b>EX-B</b>	0.30	0.40	0.25	235	20	12.0	720	3.5%	6.5	1.8	13.9	3.6	6.4	14.1	33.5						
<b>EX-C1</b>	0.30	0.40	0.25	100	10	7.4	800	4.0%	7.0	1.9	9.3	4.2	7.5	4.8	11.4						
<b>EX-C2</b>	0.30	0.40	0.25	250	6	18.8	400	4.0%	7.0	1.0	19.8	3.0	5.4	6.8	16.2						
<b>EX-D</b>	0.30	0.40	0.25	300	9	19.2	745	5.4%	8.1	1.5	20.7	3.0	5.3	8.0	19.0						
<b>EX-E</b>	0.30	0.40	0.25	135	10	9.5	190	6.3%	8.8	0.4	9.9	4.1	7.3	3.2	7.6						
<b>EX-F</b>	0.30	0.40	0.25	300	14	16.6	185	6.5%	8.9	0.3	16.9	3.3	5.8	7.4	17.5						
<b>EX-G</b>	0.90	0.95	0.25	80	12	5.8	0	0.0%	0.1	0.0	5.8	4.9	8.7	12.4	23.2						
<b>EX-H</b>	0.30	0.40	0.25	300	14	16.6	300	2.4%	5.4	1.5	18.1	3.2	5.6	5.0	12.0						
<b>OS-B1A</b>	0.30	0.40	0.25	300	18	15.2	940	4.8%	7.7	2.0	17.3	3.2	5.8	24.2	57.4						
<b>OS-B1B</b>	0.30	0.40	0.25	300	32	12.6	1560	5.1%	7.9	3.3	15.9	3.4	6.0	41.5	98.4						
<b>OS-B1C</b>	0.30	0.40	0.25	300	10	18.5	115	3.5%	6.5	0.3	18.8	3.1	5.5	1.7	4.0						



BASIN	OVERLAND			STREET / CHANNEL FLOW					Time of Travel (T <sub>c</sub> )		INTENSITY *		TOTAL FLOWS			
	AREA TOTAL (Acrey)	C <sub>s</sub>	C <sub>100</sub>	C <sub>s</sub>	Length (ft)	Height (ft)	T <sub>c</sub> (min)	Length (ft)	Slope (%)	Velocity (fps)	T <sub>c</sub> (min)	TOTAL (min)	I <sub>1</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>s</sub> (c.f.s.)	Q <sub>100</sub> (c.f.s.)
OS-B1D	6.0	0.30	0.40	0.25	300	20	14.7	575	3.5%	6.5	1.5	16.2	3.3	5.9	6.0	14.3
OS-B1E	10.1	0.30	0.40	0.25	300	22	14.3	810	3.6%	6.6	2.0	16.3	3.3	5.9	10.1	24.0
OS-B3A	9.1	0.30	0.40	0.25	300	15	16.2	400	4.7%	7.6	0.9	17.1	3.3	5.8	8.9	21.1
OS-B3B	2.3	0.30	0.40	0.25	300	10	18.5	180	2.5%	6.0	0.5	19.0	3.1	5.5	2.1	5.1
OS-B3C	5.7	0.35	0.45	0.25	300	14	16.6	310	4.7%	7.6	0.7	17.2	3.2	5.8	6.5	14.8
OS-B4A	5.2	0.30	0.40	0.25	300	38	11.9	160	13.3%	12.9	0.2	12.1	3.8	6.8	5.9	14.1
OS-B4B	8.1	0.30	0.40	0.25	300	42	11.5	220	15.0%	13.6	0.3	11.8	3.8	6.8	9.3	22.2
OS-B4C	13.4	0.30	0.40	0.25	300	14	16.6	1010	7.6%	9.6	1.7	18.3	3.2	5.6	12.7	30.1
A1 (Offsite)	120.6	0.20	0.20									45.6	1.9	3.4	45.5	81.0
A2 (Offsite)	134.2	0.20	0.20									39.2	2.1	3.7	55.5	98.9
A3	103.9	0.20	0.20									40.3	2.0	3.6	42.3	75.3
A4	162.4	0.20	0.20									35.0	2.2	3.9	71.9	128.1
A5	134.2	0.20	0.20									38.2	2.1	3.7	56.4	100.4
A6	90.0	0.20	0.20									37.3	2.1	3.8	38.4	68.3

BASIN	AREA TOTAL (Acres)		OVERLAND						STREET / CHANNEL FLOW				Time of Travel (T <sub>c</sub> )		INTENSITY *		TOTAL FLOWS	
	C <sub>1</sub>	C <sub>100</sub>	C <sub>1</sub>	Length (ft)	Height (ft)	T <sub>c</sub> (min)	Length (ft)	Slope (%)	Velocity (fps)	T <sub>c</sub> (min)	TOTAL (min)	I <sub>1</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>1</sub> (cfs)	Q <sub>100</sub> (cfs)			
A7	87.4	0.20	0.20			Te per DBPS					39.3	2.1	3.7	36.1	64.3			
A8	153.3	0.20	0.20			Te per DBPS					42.6	2.0	3.5	60.3	107.4			
A9	126.0	0.20	0.20			Te per DBPS					36.2	2.2	3.9	54.7	97.4			
A10	108.2	0.20	0.20			Te per DBPS					40.4	2.0	3.6	44.0	78.3			
A11	76.1	0.20	0.20			Te per DBPS					31.7	2.3	4.2	35.7	63.6			
A12	76.2	0.40	0.40			Te per DBPS					31.7	2.3	4.2	71.5	127.3			
A13	102.9	0.20	0.20			Te per DBPS					39.2	2.1	3.7	42.6	75.8			

\* Intensity equations assume a minimum travel time of 5 minutes.

Calculated by: VAS  
Date: 2/7/2013

# EAGLE RISING FINAL DRAINAGE REPORT (Surface Routing Summary - Existing)

Design Point(s)	Contributing Basins/Design Points	Equivalent CA <sub>5</sub>	Equivalent CA <sub>100</sub>	Maximum TC	Intensity		Flow		Comments
					I <sub>5</sub>	I <sub>100</sub>	Q <sub>5</sub>	Q <sub>100</sub>	
E1	A1,A2,A3,A4,A5,A8,A9,A13 (Offsite)	207.50	207.50	66.4	1.5	2.6	307.4	547.1	Inflow Point to Site along main stem
E2	OS-B1A	7.47	9.96	17.3	3.2	5.8	24.2	57.4	
E3	OS-B1B	12.30	16.40	15.9	3.4	6.0	41.5	98.4	
E4	A6, A7, & A10	57.12	57.12	77.7	1.3	2.4	76.2	135.6	
E5	E1+E4+EX-A1+A11	281.31	281.80	68.5	1.5	2.6	408.2	727.9	
E6	E5+E2+E3+EX-B+A12+EX-A2+EX-C1	337.12	346.05	69.6	1.4	2.6	483.9	884.2	DBPS DPS=870, w/in accept. range
E7	OS-B1C	0.54	0.72	18.8	3.1	5.5	1.7	4.0	
E8	OS-B1D	1.80	2.40	16.2	3.3	5.9	6.0	14.3	
E9	E6+E7+E8+EX-C2+EX-D+OS-B4A	344.86	356.37	71.7	1.4	2.5	485.4	892.9	
E10	OS-B1E	3.03	4.04	16.3	3.3	5.9	10.1	24.0	
E11	OS-B3A	2.73	3.64	17.1	3.3	5.8	8.9	21.1	
E12	E9+EX-E+EX-F+E10+OS-B4B+E11	356.08	371.33	72.2	1.4	2.5	498.9	926.1	
E13	OS-B3B	0.69	0.92	19.0	3.1	5.5	2.1	5.1	
E14	E12+EX-G+E13+EX-H+OS-B4C	364.90	382.39	75.6	1.4	2.4	495.8	924.8	Future Briargate Pkwy Crossing
E15	OS-B3C	2.00	2.57	17.2	3.2	5.8	6.5	14.8	
E16	E13+EXH	2.23	3.04	37.1	2.1	3.8	4.9	11.6	
E17	E2+E3	19.77	26.36	17.3	3.2	5.8	64.0	152.0	
E18	E7+EXC1	1.66	2.24	28.1	2.5	4.5	4.3	78.0	
E19	E17+EX-B+E18	25.38	33.84	28.1	2.5	4.5	63.7	151.3	
E20	E8+EX-D	4.50	6.00	36.9	2.1	3.8	9.7	22.9	
E21	E10+E11+EX-F	8.01	10.68	34.0	2.3	4.0	18.1	42.9	

Calculated by: VAS  
Date: 6/4/2013



# EAGLE RISING FINAL DRAINAGE REPORT (Surface Routing Summary - Proposed)

Design Point(s)	Contributing Basins/Design Points	Equivalent CA <sub>5</sub>	Equivalent CA <sub>100</sub>	Maximum T C	Intensity		Flow		Comments
					I <sub>5</sub>	I <sub>100</sub>	Q <sub>5</sub>	Q <sub>100</sub>	
1	A1,A2,A3,A4,A5,A8,A9,A13 (Offsite)	207.50	207.50	66.4	1.5	2.6	307.4	547.1	Inflow Point to Site along main stem
2	A6, A7, A10 (Offsite)	57.12	57.12	77.7	1.3	2.4	76.2	135.6	
3	DP1,DP2,A1(Onsite),A11	281.31	281.80	68.5	1.5	2.6	408.2	727.9	
4	OS-B1A	7.47	9.96	17.3	3.2	5.8	24.2	57.4	
5	OS-B1B	12.30	16.40	15.9	3.4	6.0	41.5	98.4	
6	DP4,DP5,B,C	21.06	28.08	17.7	3.2	5.7	67.5	160.1	
6A	E7, E1	1.68	2.24	28.1	2.5	4.5	4.2	10.0	
6B	DP6, D, DP6A	25.95	34.60	28.1	2.5	4.5	65.2	154.7	
7	DP3,DP6B,A12,A2(Onsite)	338.22	347.52	69.1	1.4	2.6	487.9	892.4	DBPS DP5=870, w/in accept. range
8	DP7,E2	340.47	350.52	69.3	1.4	2.6	490.3	898.4	
8A	OS-B1D, 1/2 F	3.12	4.16	25.9	2.6	4.7	8.2	19.5	
8B	OS-B1D, F	4.44	5.92	35.6	2.2	3.9	9.7	23.1	50' Wide Drainage Swale
9	DP8,OS-B1D,F,OS-B4A	346.47	358.52	71.2	1.4	2.5	490.0	902.5	
10	DP9,G	347.25	359.56	71.4	1.4	2.5	490.2	903.5	
11	OS-B1E,H,OS-B3AJ	7.47	9.96	17.1	3.3	5.8	24.3	57.8	36" Culvert
11A	DP11, J	8.28	11.04	17.3	3.2	5.8	26.8	63.6	Outfall into Pond
12	DP10,DP11,J	355.53	370.60	71.5	1.4	2.5	501.4	930.3	
13	DP12,OS-B4B	357.96	373.84	71.7	1.4	2.5	503.9	936.7	
14	DP13,K,OS-B4C	362.48	379.07	72.5	1.4	2.5	506.5	942.8	Future Briargate Pkwy Crossing
15	OS-B3B	0.69	0.92	19.0	3.1	5.5	2.1	5.1	Ex. 24" Culvert
16	DP15,L	2.29	3.06	20.9	2.9	5.2	6.8	16.0	Diversion Swale
17	OS-B3C	2.00	2.57	17.2	3.2	5.8	6.5	14.8	Off-Site Flow

Calculated by: VAS

Date: 6/4/2013

## 10 Hydraulic Calculations

Culvert Calculations

Ditch Flow Calculations

HEC-RAS Water Surface Elevations Calculations

not found?



# Culvert Report


## 61145 - Eagle Rising DP7 30in RCP Culvert

Invert Elev Dn (ft)	= 7146.00
Pipe Length (ft)	= 50.00
Slope (%)	= 1.00
Invert Elev Up (ft)	= 7146.50
Rise (in)	= 30.0
Shape	= Circular
Span (in)	= 30.0
No. Barrels	= 1
n-Value	= 0.013
Culvert Type	= Circular Concrete
Culvert Entrance	= Groove end projecting (C)
Coeff. K,M,c,Y,k	= 0.0045, 2, 0.0317, 0.69, 0.2

<b>Embankment</b>	
Top Elevation (ft)	= 7150.00
Top Width (ft)	= 20.00
Crest Width (ft)	= 115.00

<b>Calculations</b>	
Qmin (cfs)	= 0.00
Qmax (cfs)	= 31.40
Tailwater Elev (ft)	= (dc+D)/2

<b>Highlighted</b>	
Qtotal (cfs)	= 31.40
Qpipe (cfs)	= 31.40
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 6.85
Veloc Up (ft/s)	= 7.81
HGL Dn (ft)	= 7148.20
HGL Up (ft)	= 7148.41
Hw Elev (ft)	= 7149.53
Hw/D (ft)	= 1.21
Flow Regime	= Inlet Control

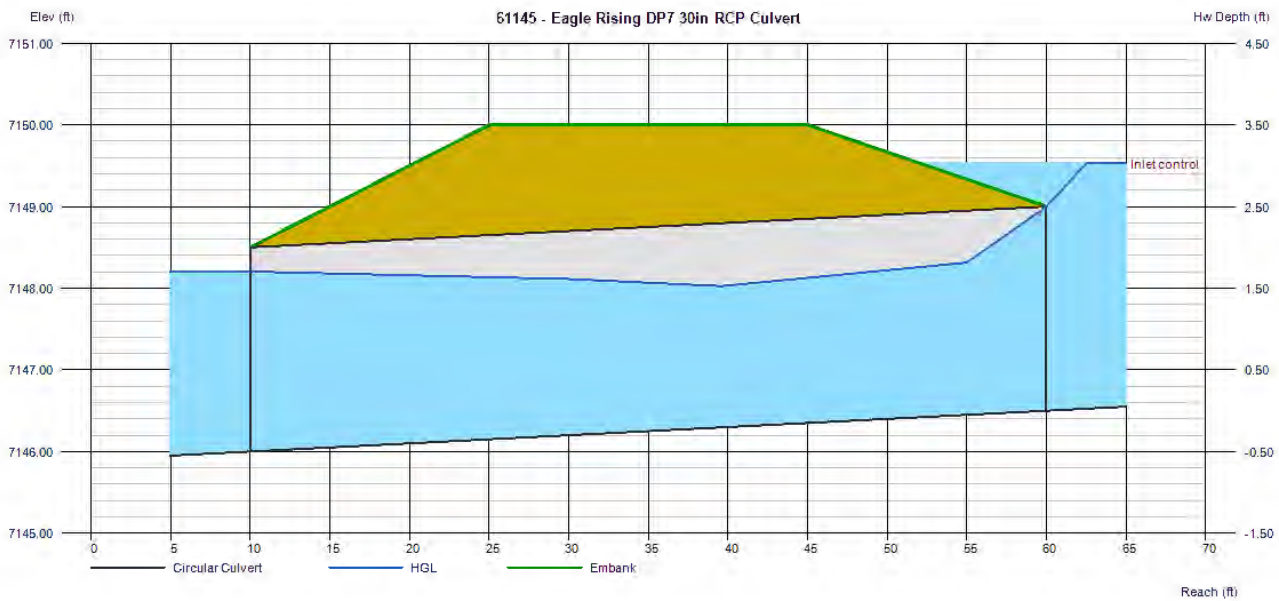

# Culvert Report

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

ay, Jul 5 2022

36 in RCP Not shown on plans

Missing dual 24in pipes along road

## 61145 - Eagle Rising DP8 36in RCP Culvert

Invert Elev Dn (ft)	= 7129.00
Pipe Length (ft)	= 84.00
Slope (%)	= 3.57
Invert Elev Up (ft)	= 7132.00
Rise (in)	= 36.0
Shape	= Circular
Span (in)	= 36.0
No. Barrels	= 1
n-Value	= 0.013
Culvert Type	= Circular Concrete
Culvert Entrance	= Groove end projecting (C)
Coeff. K,M,c,Y,k	= 0.0045, 2, 0.0317, 0.69, 0.2

### Embankment


Top Elevation (ft)	= 7138.00
Top Width (ft)	= 33.00
Crest Width (ft)	= 105.00

### Calculations

Qmin (cfs)	= 0.00
Qmax (cfs)	= 60.80
Tailwater Elev (ft)	= (dc+D)/2

### Highlighted

Qtotal (cfs)	= 60.80
Qpipe (cfs)	= 60.80
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 8.94
Veloc Up (ft/s)	= 9.61
HGL Dn (ft)	= 7131.76
HGL Up (ft)	= 7134.51
Hw Elev (ft)	= 7136.36
Hw/D (ft)	= 1.45
Flow Regime	= Inlet Control

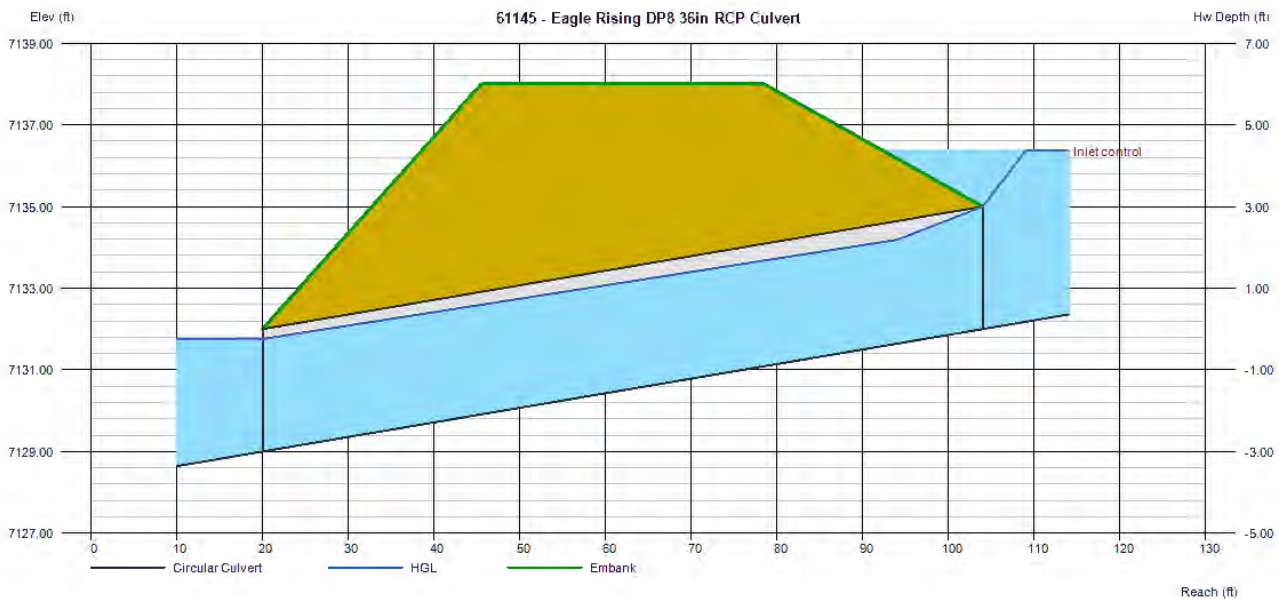




Provide a drainage plan showing  
cross-section section locations,  
contours, floodplain...

**HECRAS MODEL DATA  
SELECT OUTPUT RESULTS**


Excerpt from Eagle Rising, Filing No. 1  
Final Drainage Report  
August 2015  
Prepared by M&S Civil Consultants, Inc.




Eagle Rising Plan: Mixed Flow Regime 100 YR  
 Geom: Existing Conditions Flow: 100 YR Flow

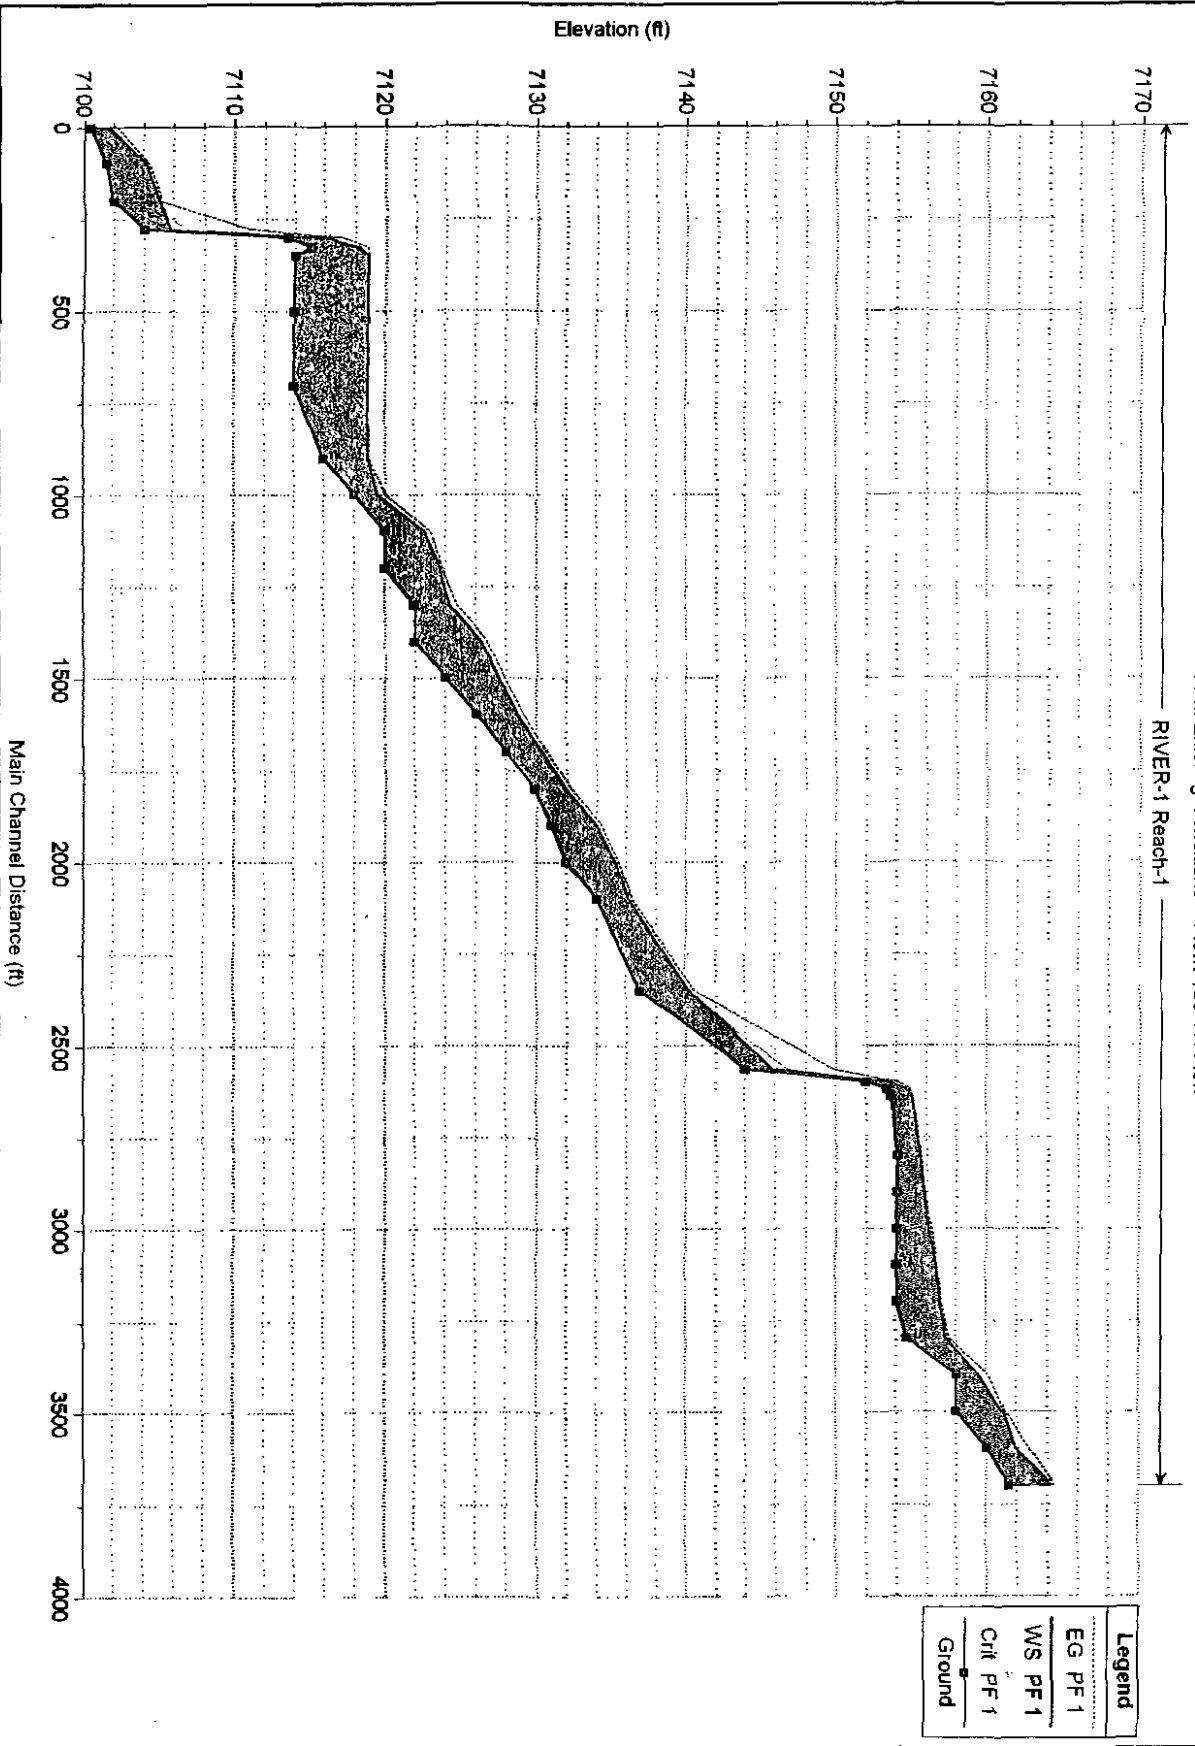RIVER-1 Reach-1

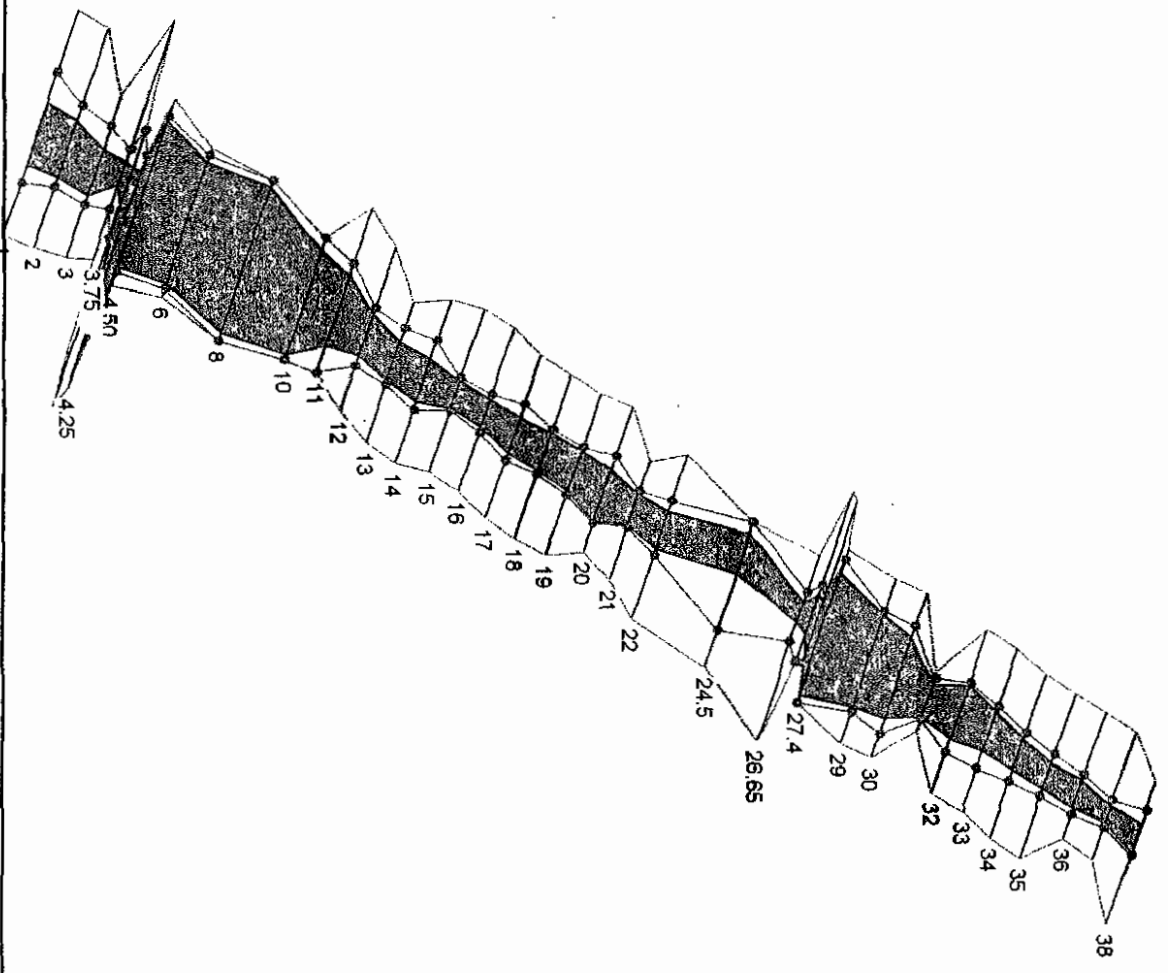

Eagle Rising Plan: Mixed Flow Regime 100 YR  
Geom: Existing Conditions Flow: 100 YR Flow



Legend	
	WS PF 1
	Ground
	Bank Sta


Reach	River Sta	Profile	Q Total	Mr Ch B	W.S. Elev	Ch W.S	E.G. Elev	E.G. Slope	Val Cont	Flow Area	Top Width	Friction # (CN1)
			(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft)	(sq ft)	(ft)	
Reach-1	38	PF-1	547.00	7161.45	7163.23	7164.47	0.007955	3.54	180.88	70.21	153.47	1.01
Reach-1	37	PF-1	547.00	7160.05	7161.96	7162.81	0.045691	7.39	180.88	73.87	143.54	0.42
Reach-1	36	PF-1	547.00	7158.00	7161.12	7161.57	0.004299	3.03	180.88	69.95	57.86	3.38
Reach-1	35	PF-1	547.00	7158.01	7159.53	7160.19	0.048682	6.52	180.88	83.11	113.80	0.91
Reach-1	34	PF-1	547.00	7154.67	7157.29	7157.51	0.103323	3.80	144.14	77.43	135.00	0.05
Reach-1	33	PF-1	547.00	7158.01	7159.53	7160.19	0.048682	6.52	180.88	83.11	113.80	0.91
Reach-1	32	PF-1	547.00	7154.05	7156.88	7155.63	0.002671	1.65	331.79	226.69	366.98	0.06
Reach-1	31	PF-1	547.00	7153.70	7155.05	7155.16	0.004133	1.58	325.86	300.84	297.10	0.06
Reach-1	30	PF-1	547.00	7154.40	7154.67	7154.91	0.026128	3.88	137.35	138.31	1475.14	0.06
Reach-1	29	PF-1	547.00	7153.40	7153.52	7153.52	0.004133	1.58	325.86	300.84	297.10	0.06
Reach-1	28	PF-1	547.00	7154.05	7155.05	7155.16	0.004133	1.58	325.86	300.84	297.10	0.06
Reach-1	27	PF-1	724.00	7144.00	7145.86	7146.83	0.459764	15.95	45.40	48.82	153.47	1.01
Reach-1	26	PF-1	724.00	7142.00	7153.52	7154.13	0.050406	6.25	115.80	98.92	143.54	0.52
Reach-1	25	PF-1	724.00	7137.00	7140.27	7140.62	0.021616	4.80	150.99	99.61	143.54	0.52
Reach-1	24	PF-1	724.00	7134.00	7136.17	7136.45	0.013146	4.23	171.05	93.40	143.54	0.52
Reach-1	23	PF-1	724.00	7132.00	7136.34	7136.55	0.006310	3.70	195.79	75.07	143.54	0.52
Reach-1	22	PF-1	724.00	7131.00	7134.09	7134.43	0.020840	4.67	188.53	125.66	143.54	0.52
Reach-1	21	PF-1	890.00	7128.10	7128.80	7128.23	0.018774	5.22	170.77	88.65	143.54	0.52
Reach-1	20	PF-1	890.00	7128.00	7128.80	7128.23	0.018774	5.22	170.77	88.65	143.54	0.52
Reach-1	19	PF-1	890.00	7127.58	7127.58	7127.91	0.009378	4.87	190.76	69.49	143.54	0.52
Reach-1	18	PF-1	890.00	7125.44	7125.44	7126.79	0.013585	5.22	170.51	68.97	143.54	0.52
Reach-1	17	PF-1	890.00	7122.00	7124.33	7124.82	0.030731	5.65	157.54	106.10	143.54	0.52
Reach-1	16	PF-1	890.00	7120.00	7122.06	7122.99	0.018550	4.93	181.83	102.56	143.54	0.52
Reach-1	15	PF-1	897.00	7119.56	7119.56	7120.04	0.054076	5.56	161.33	170.02	143.54	0.52
Reach-1	14	PF-1	898.00	7118.96	7118.96	7119.02	0.001623	1.72	523.01	252.51	143.54	0.52
Reach-1	13	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	12	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	11	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	10	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	9	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	8	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	7	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	6	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	5	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	4	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	3	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	2	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52
Reach-1	1	PF-1	898.00	7118.96	7118.96	7118.96	0.000991	0.61	1475.14	356.98	143.54	0.52

address supercritical flows and high velocities

Please rotate page


Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 1

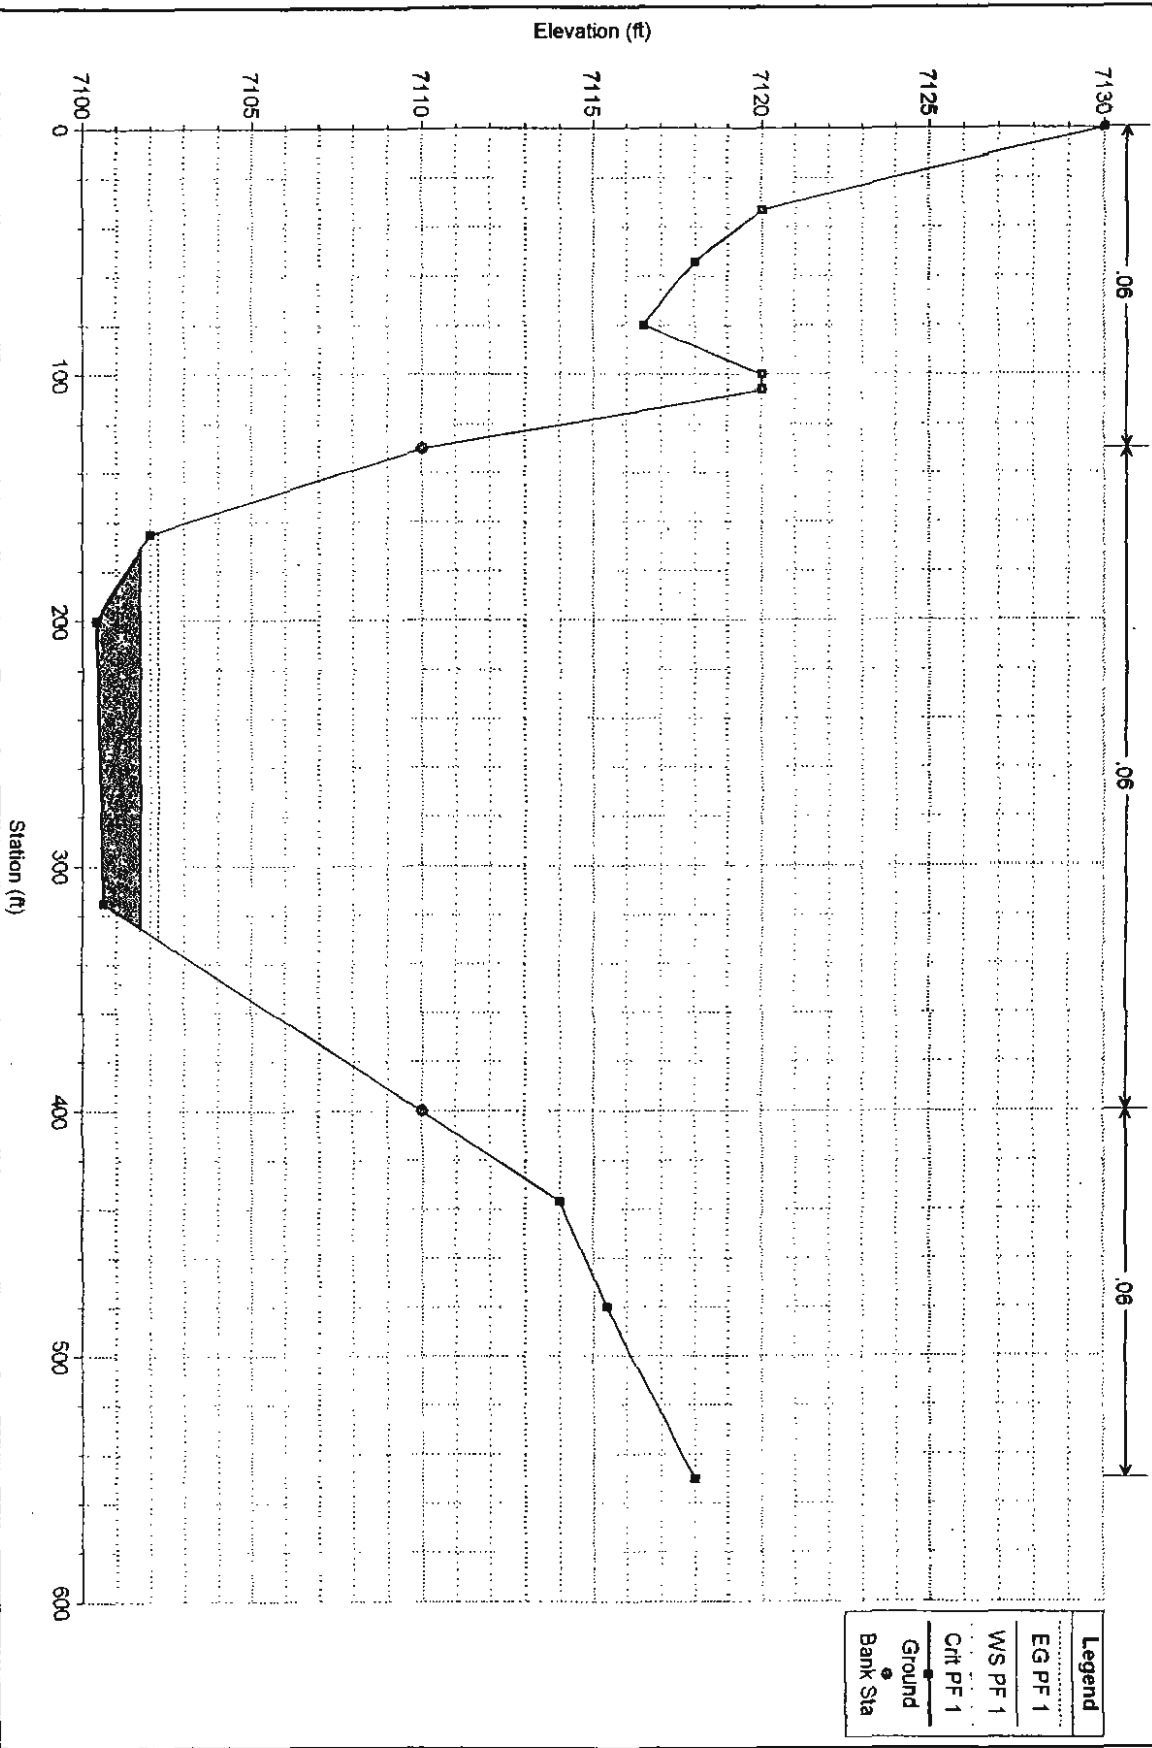

### Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 2

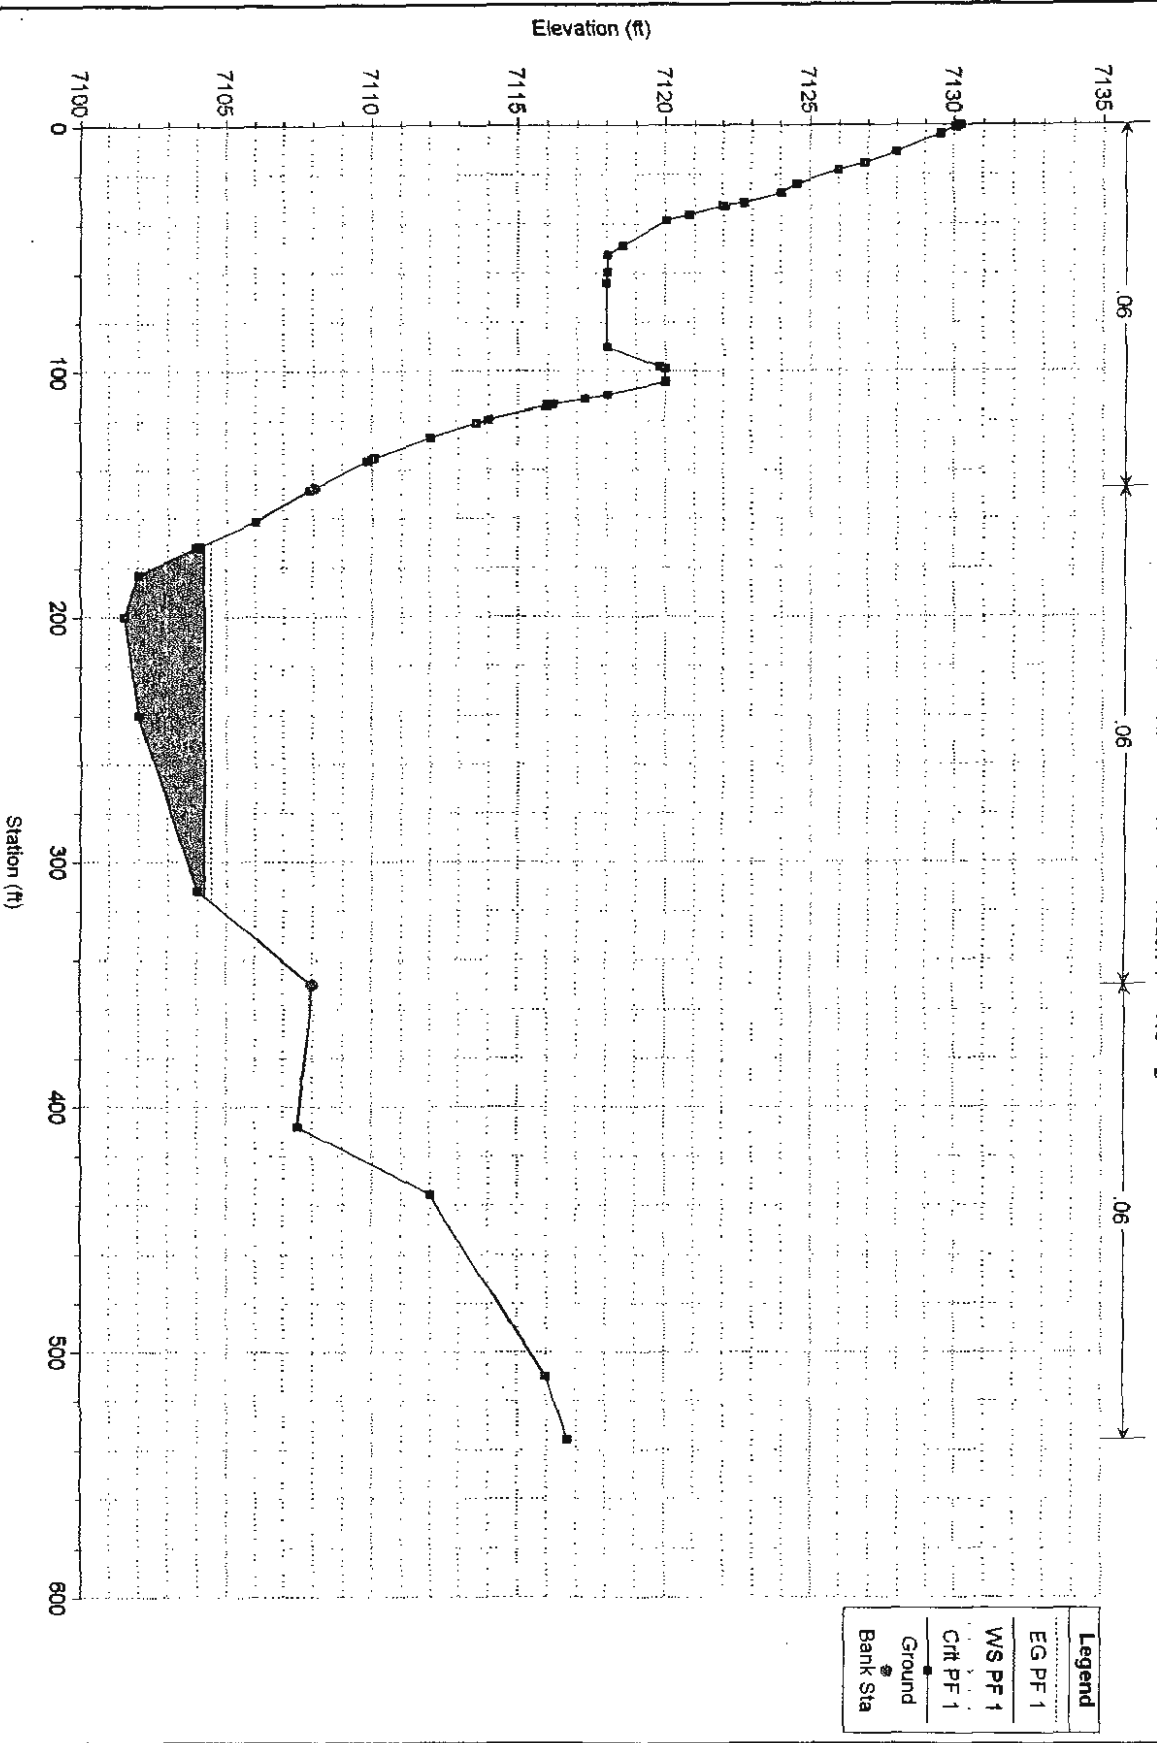

Legend	
EG PF 1	Ground
WS PF 1	Bank Sta
Ch PF 1	


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 3

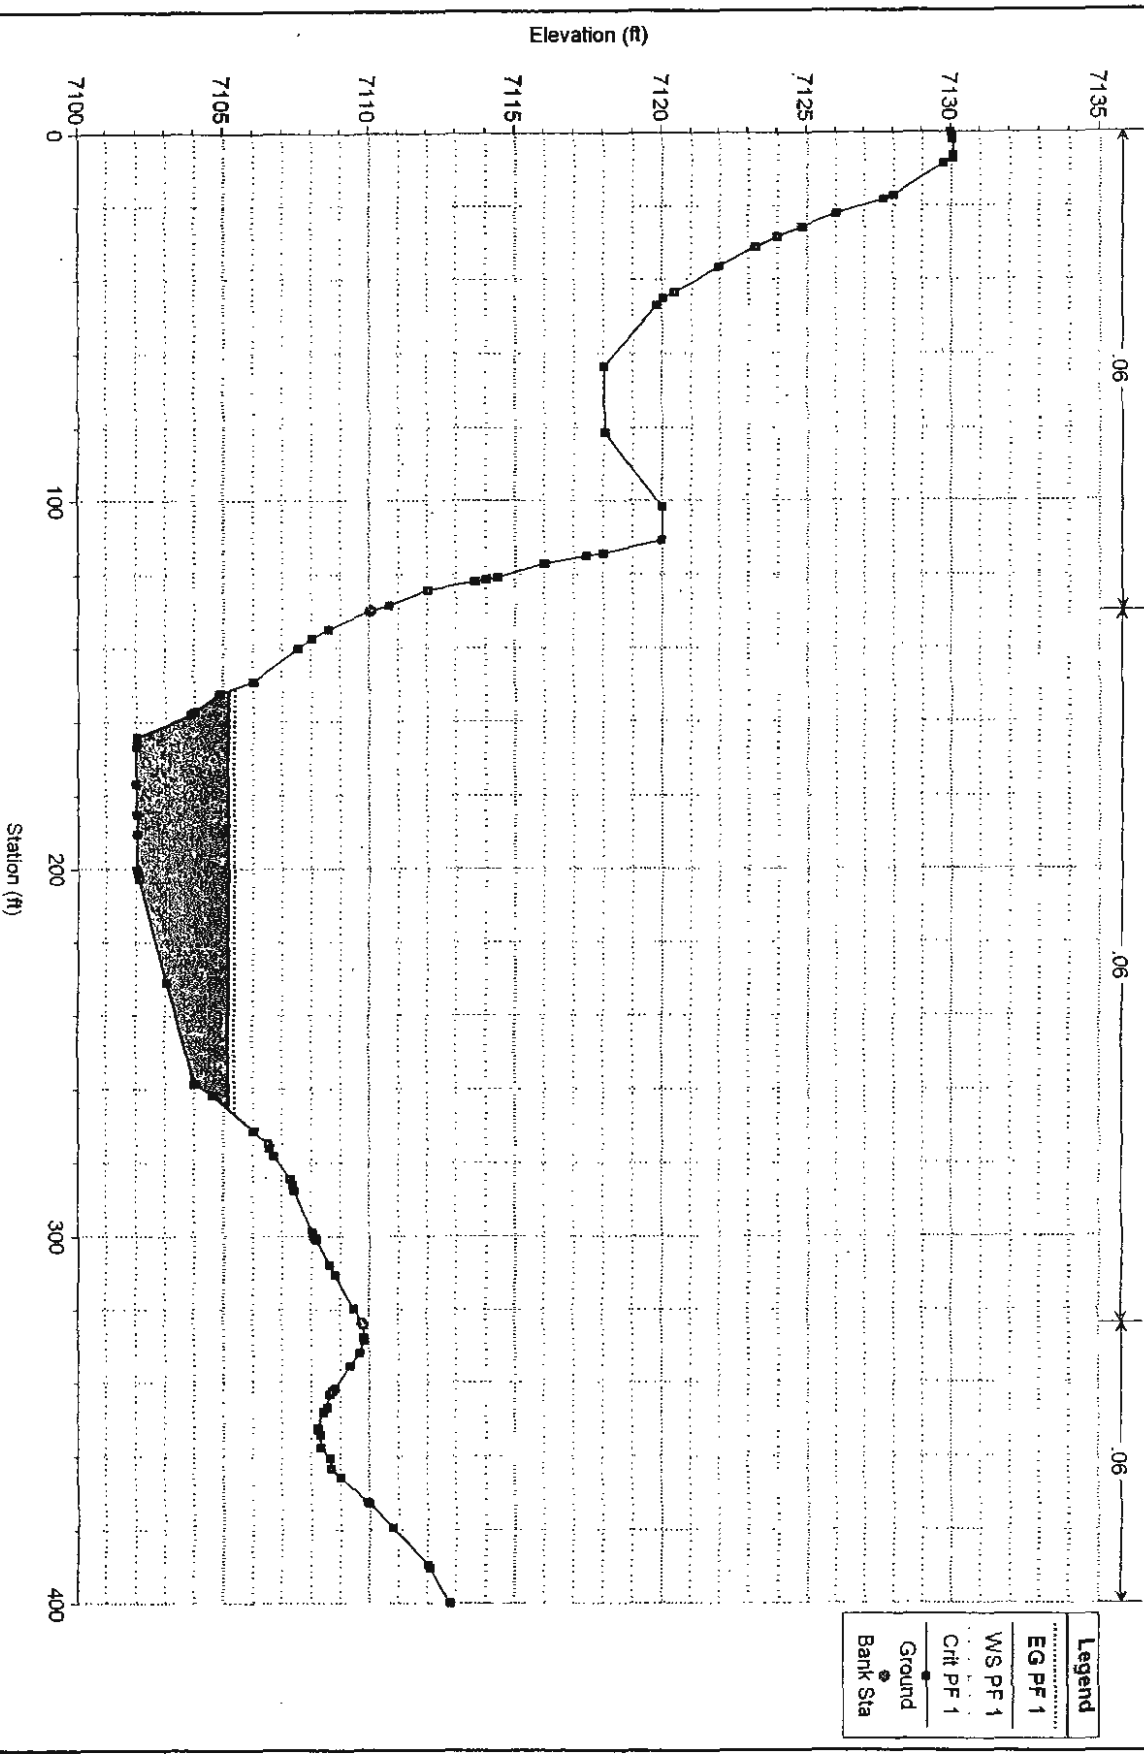

Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 3.75

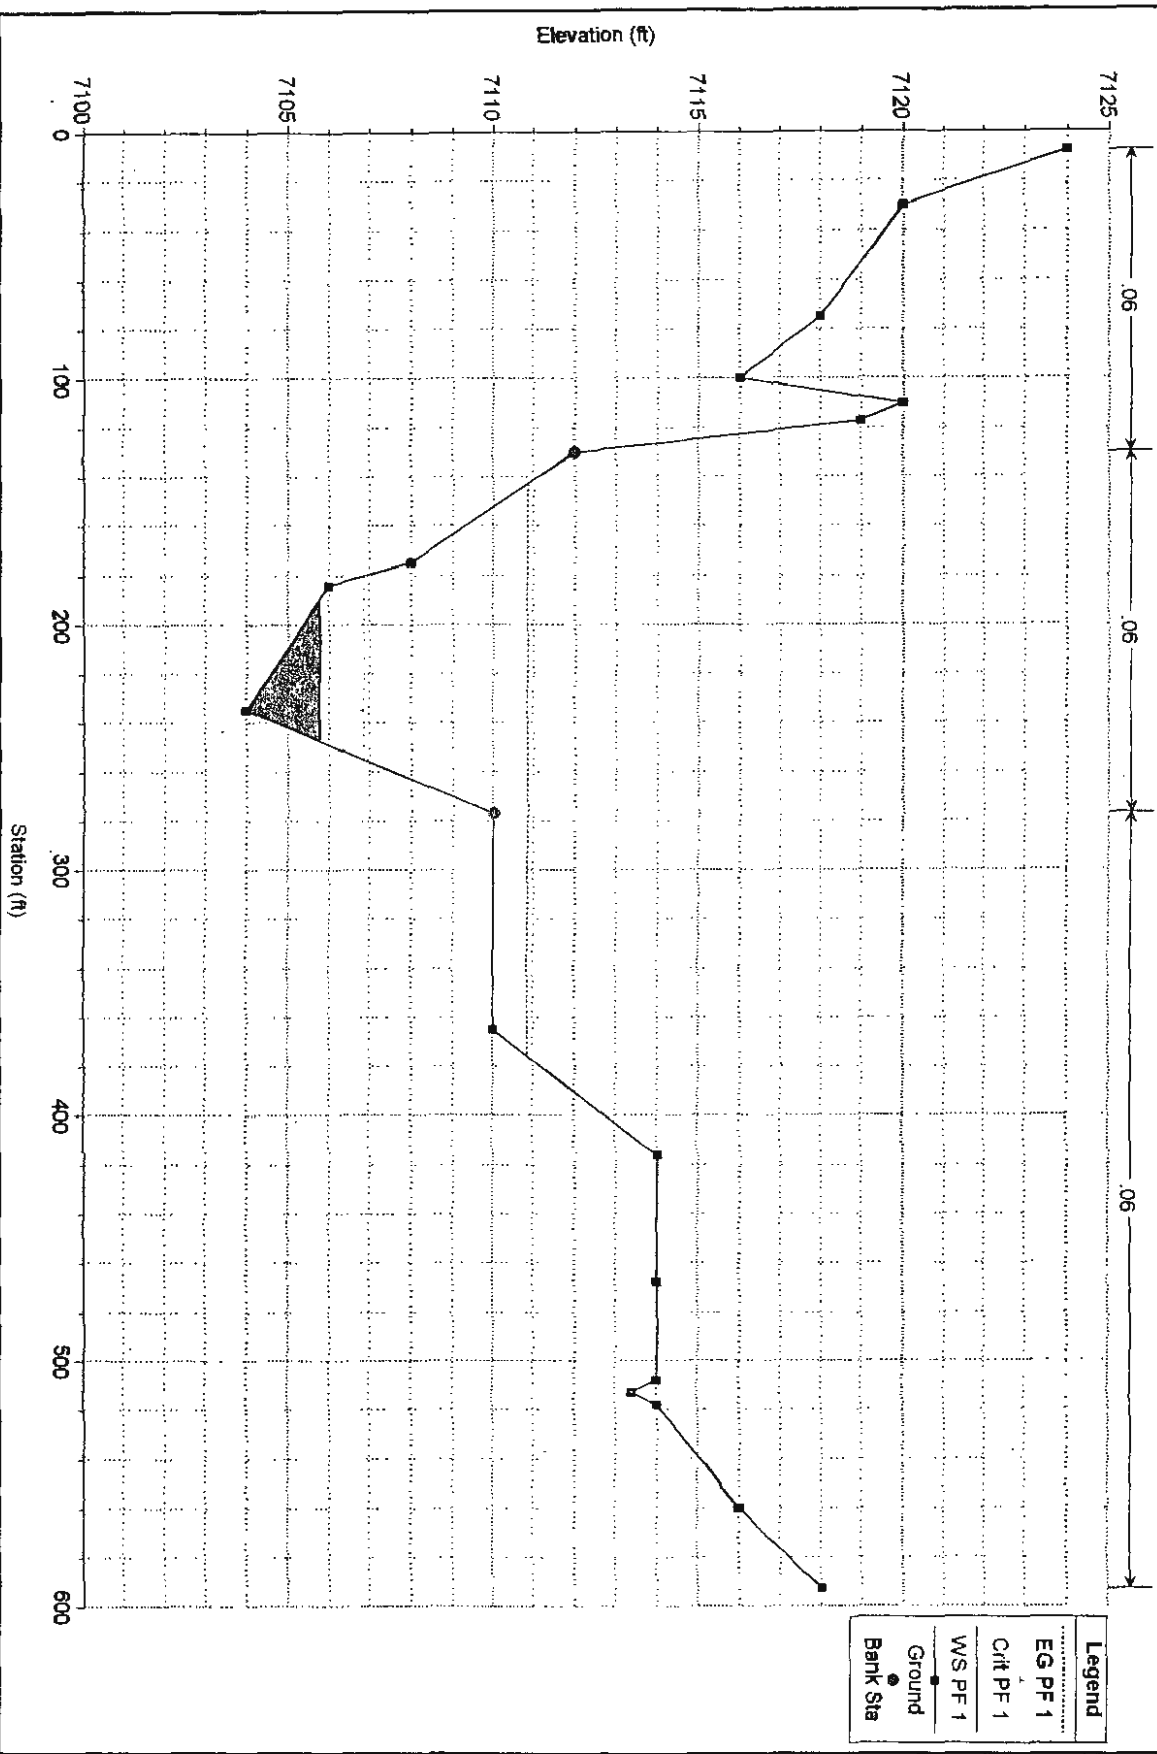




# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 4

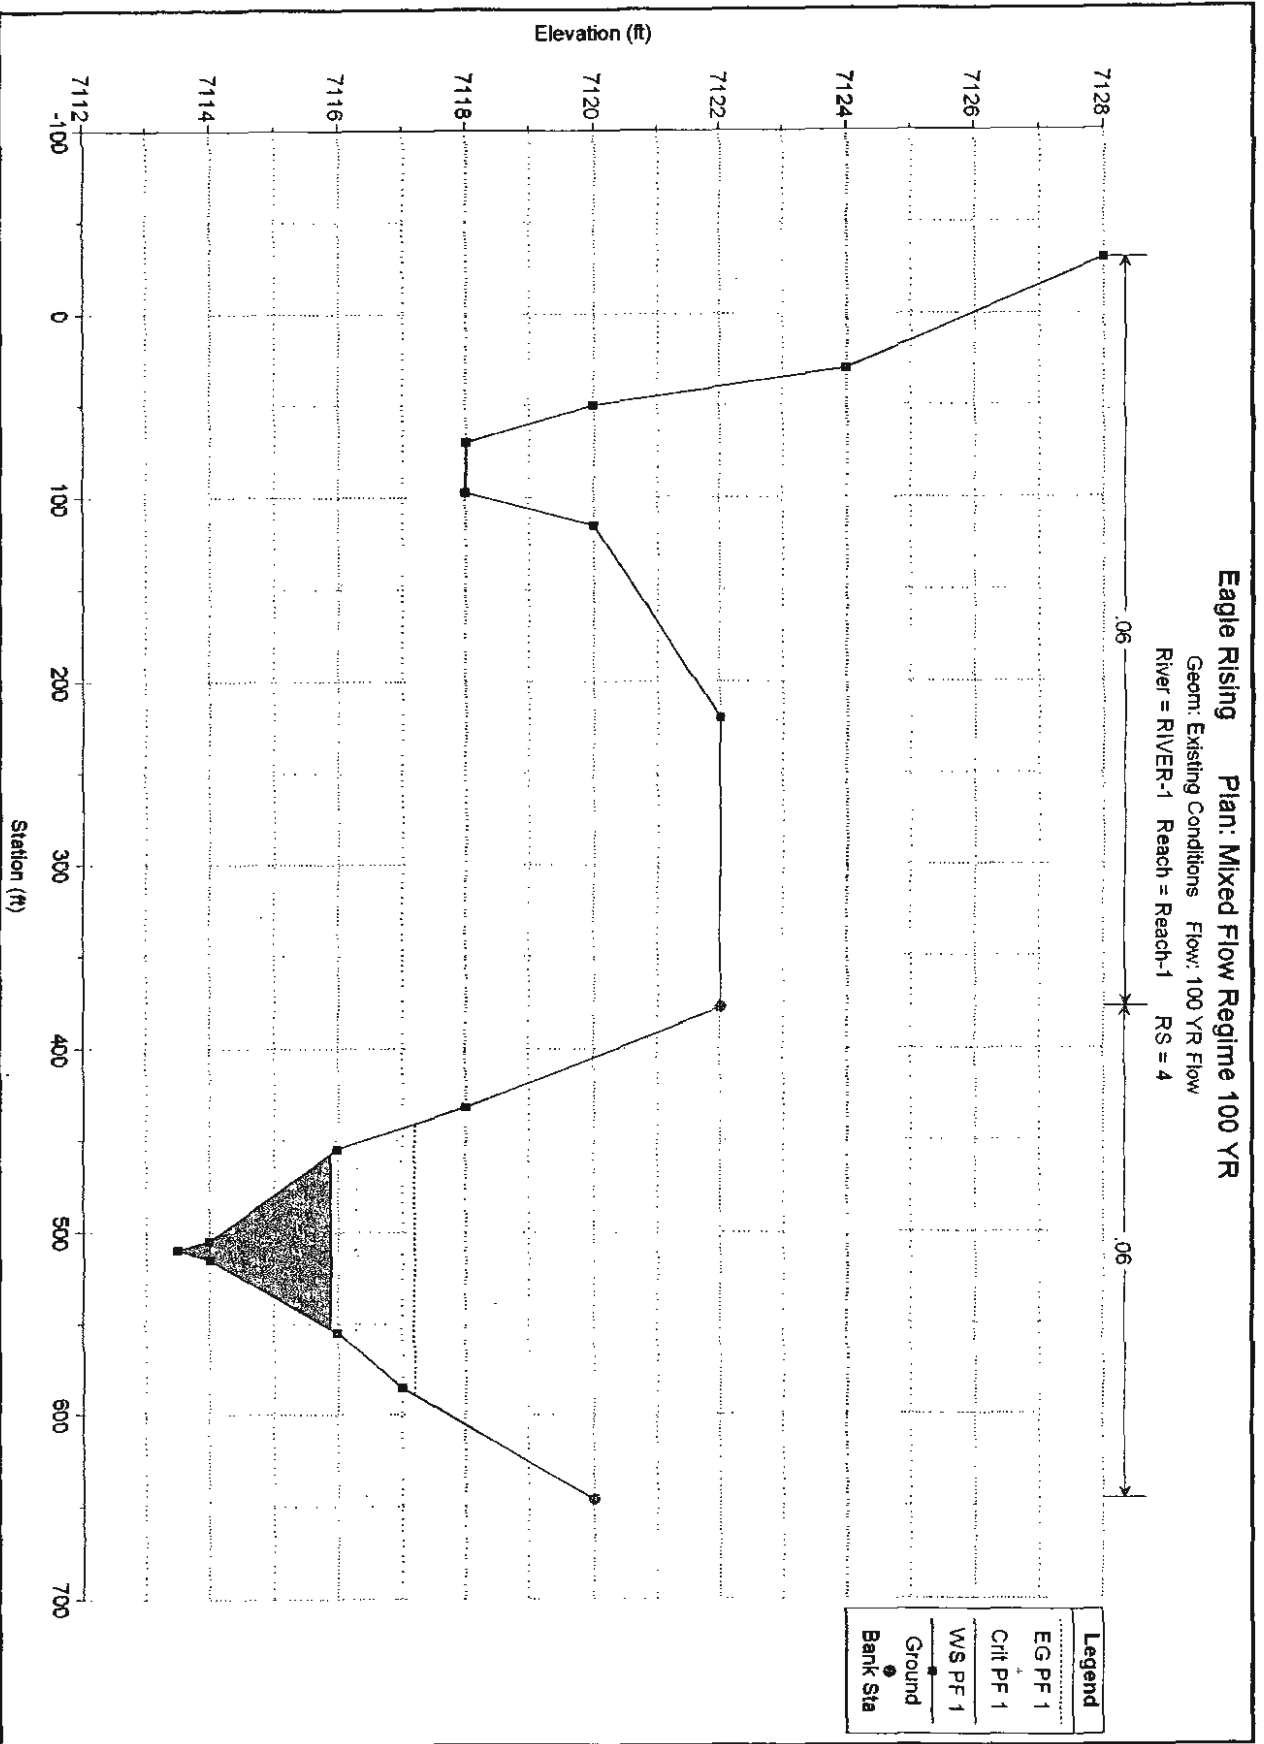

**Eagle Rising Plan: Mixed Flow Regime 100 YR**


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 4.25

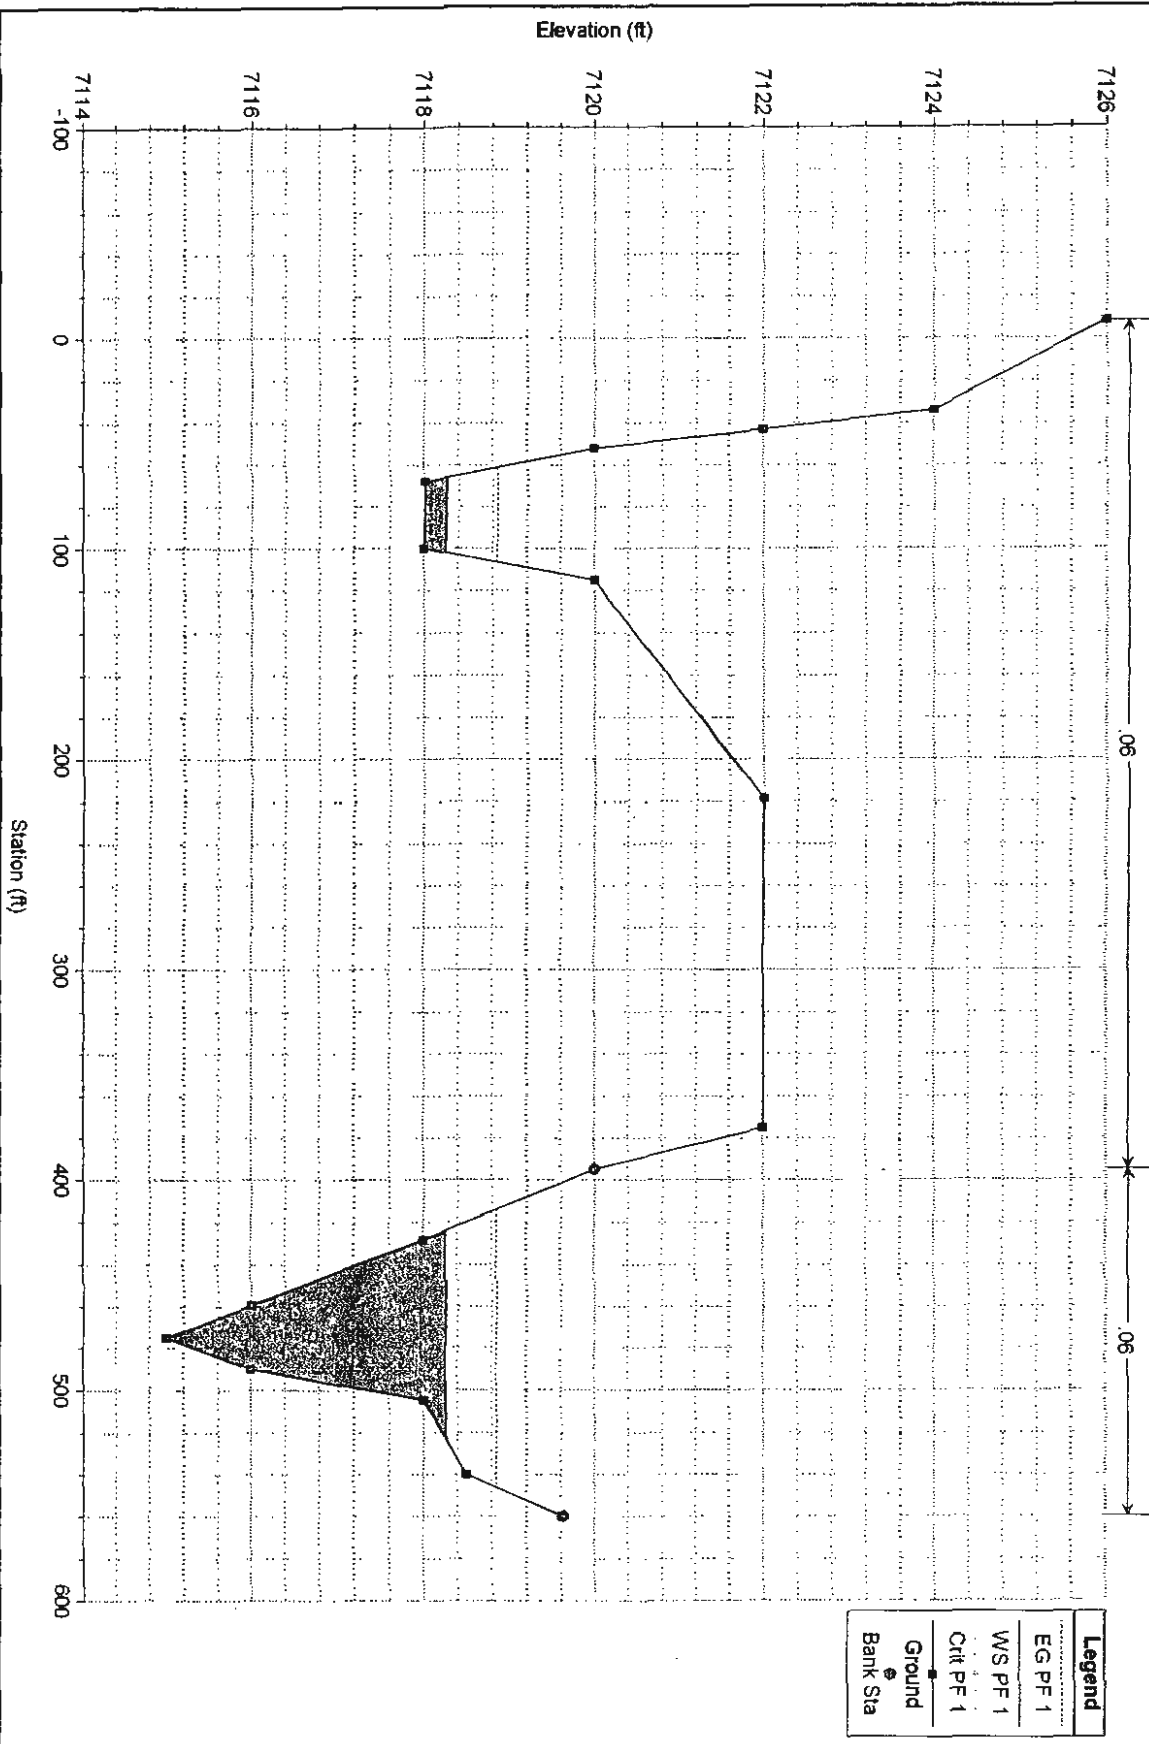

Legend	
—	EG PF 1
- - -	WS PF 1
· · ·	Crit PF 1
●	Ground
○	Bank Sta


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 4.50

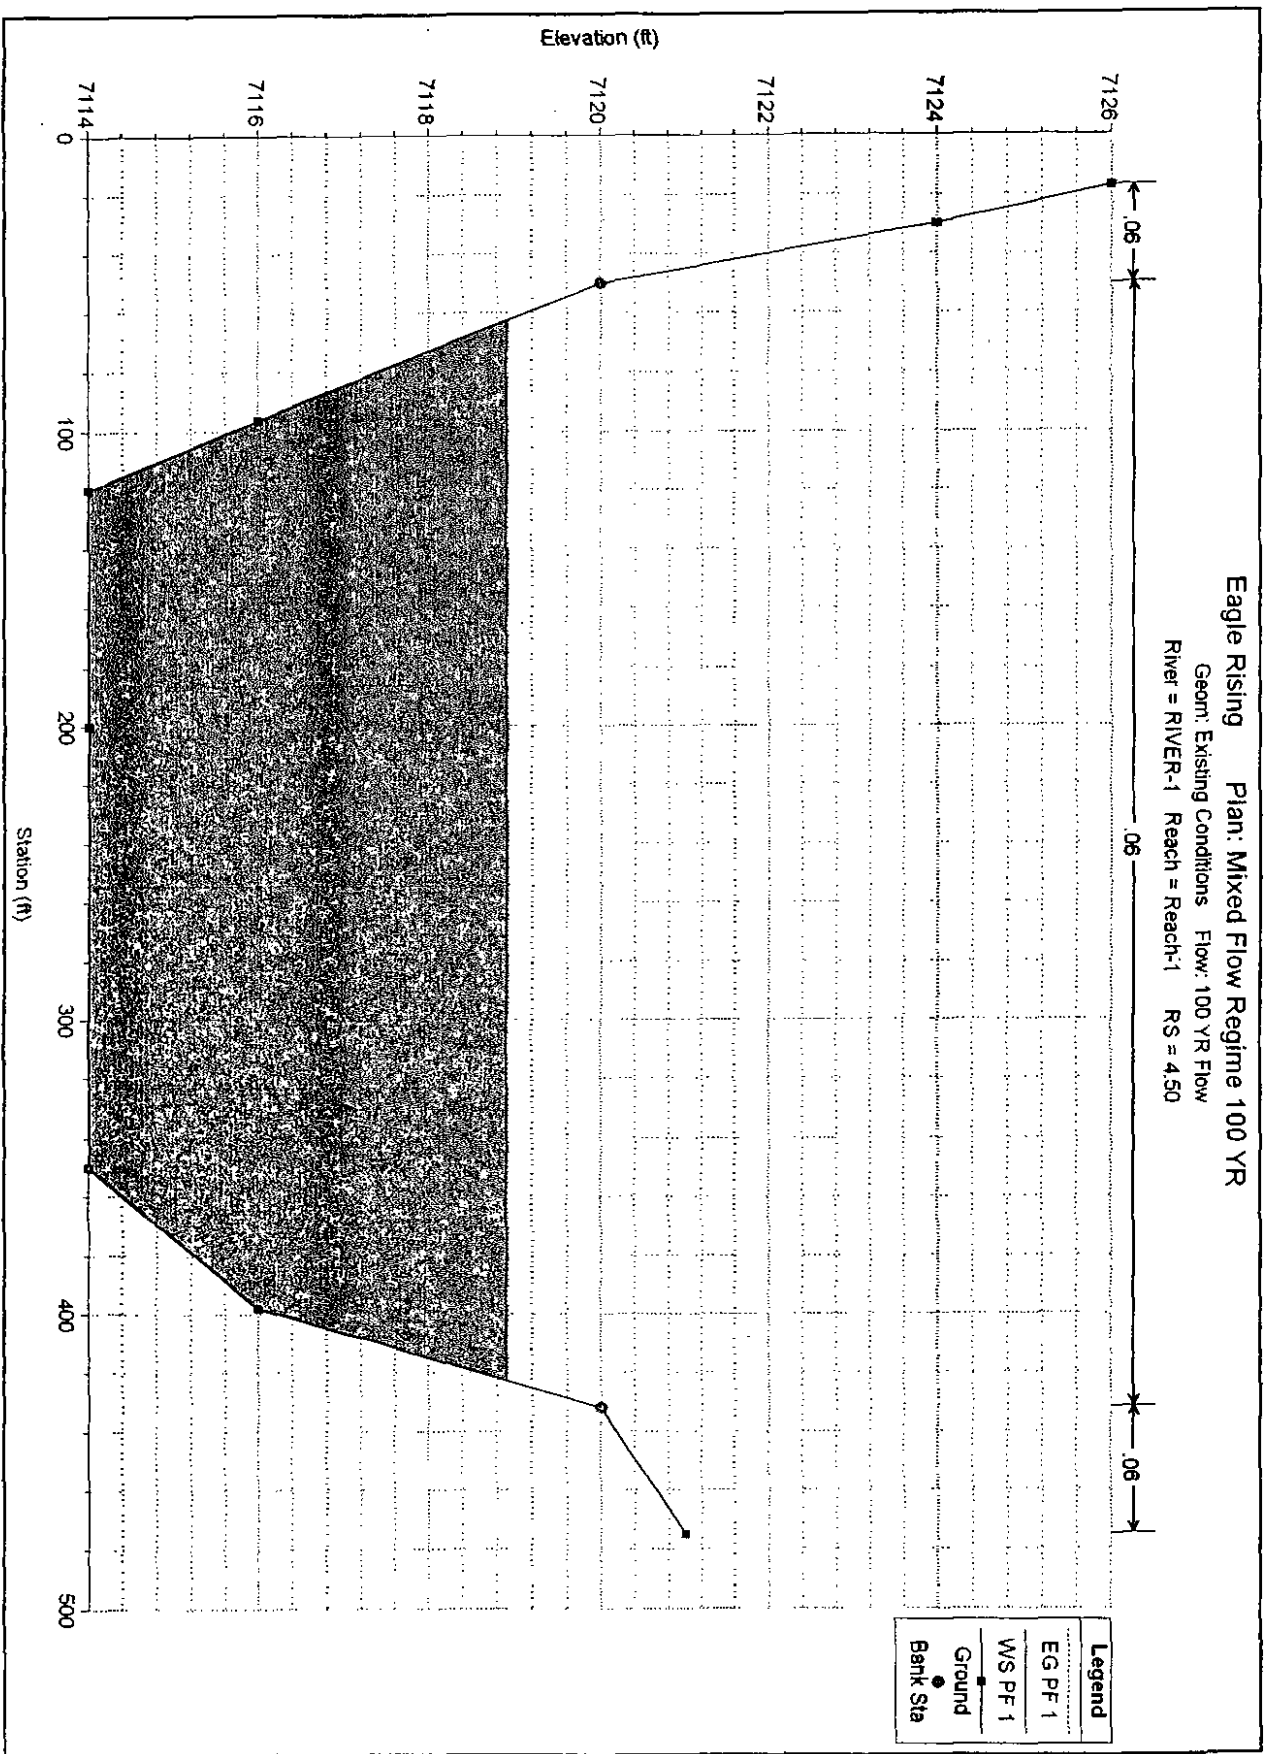


**Eagle Rising Plan: Mixed Flow Regime 100 YR**

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 6

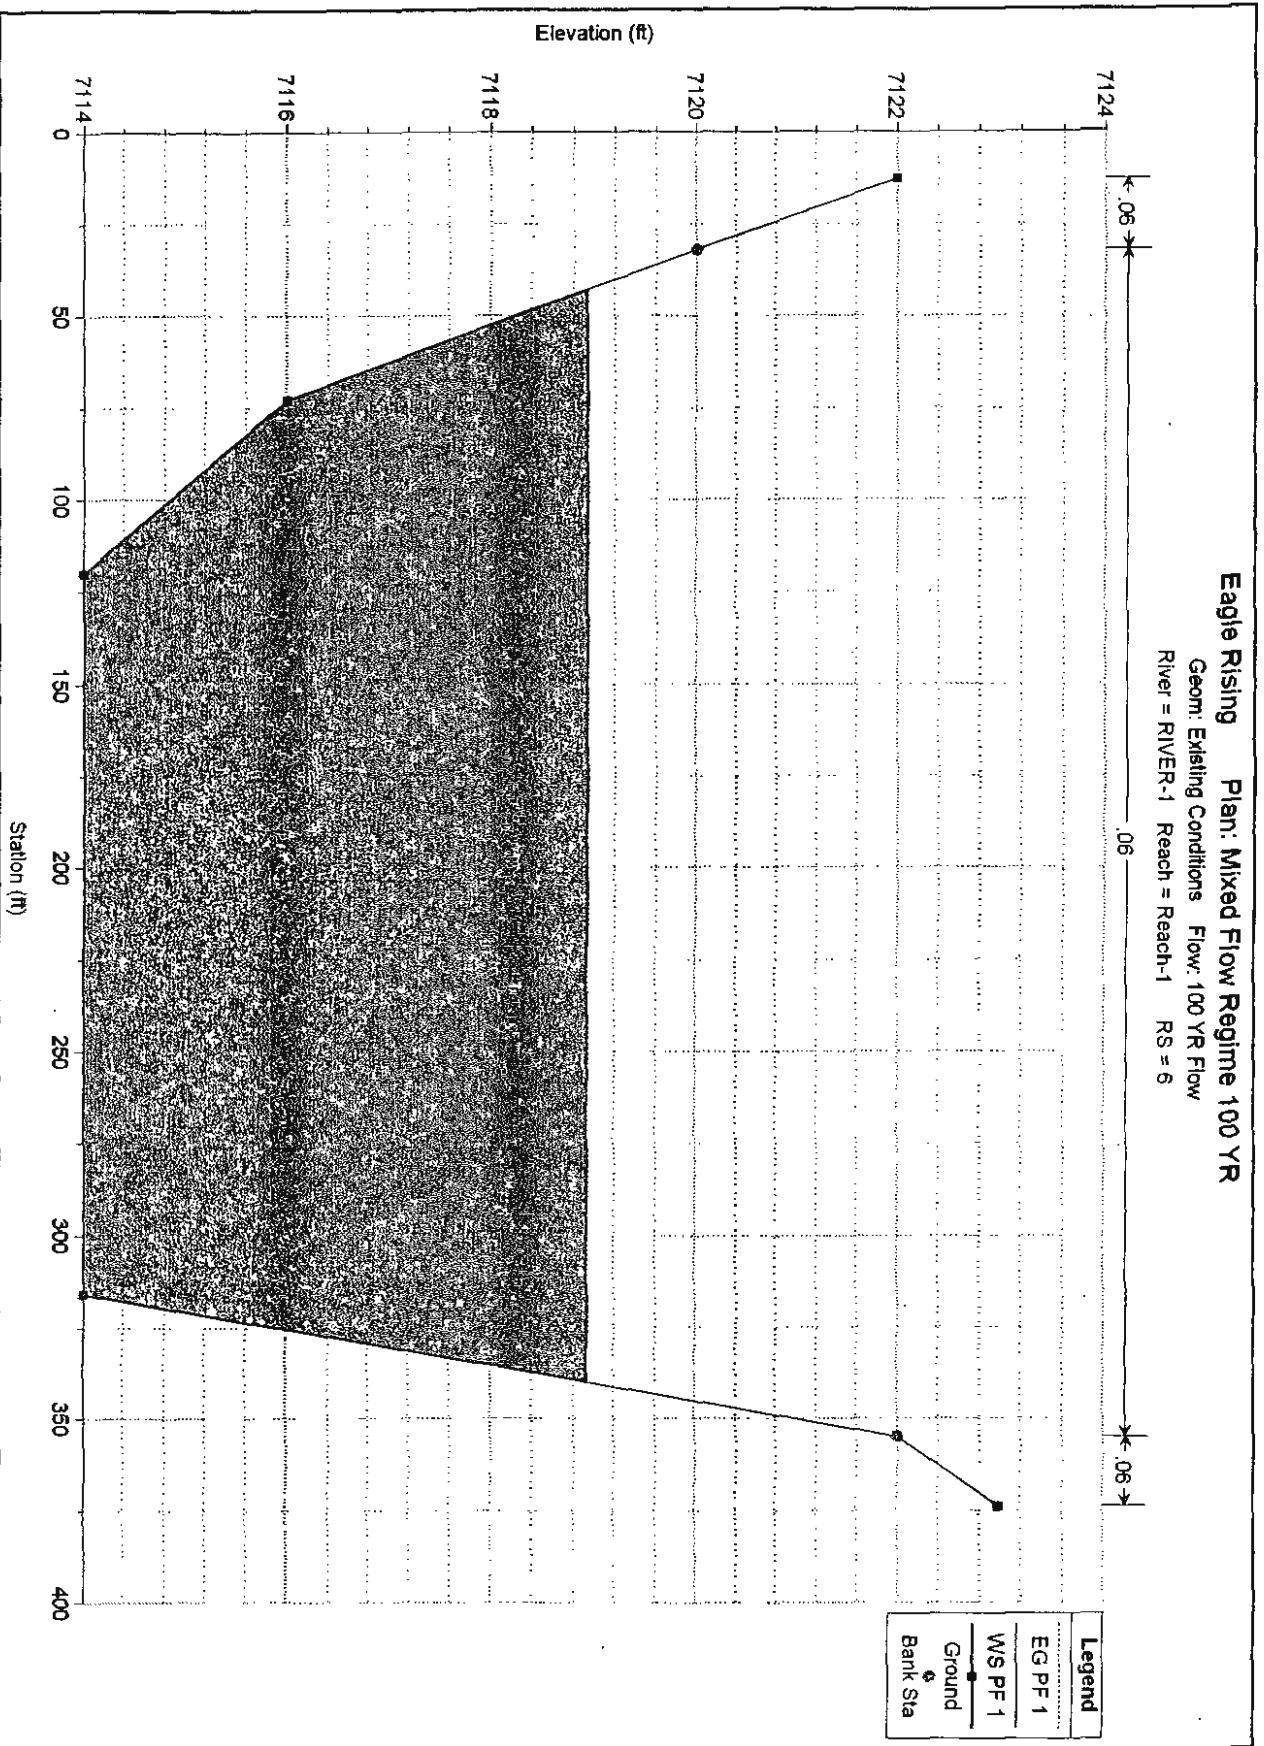


Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 0

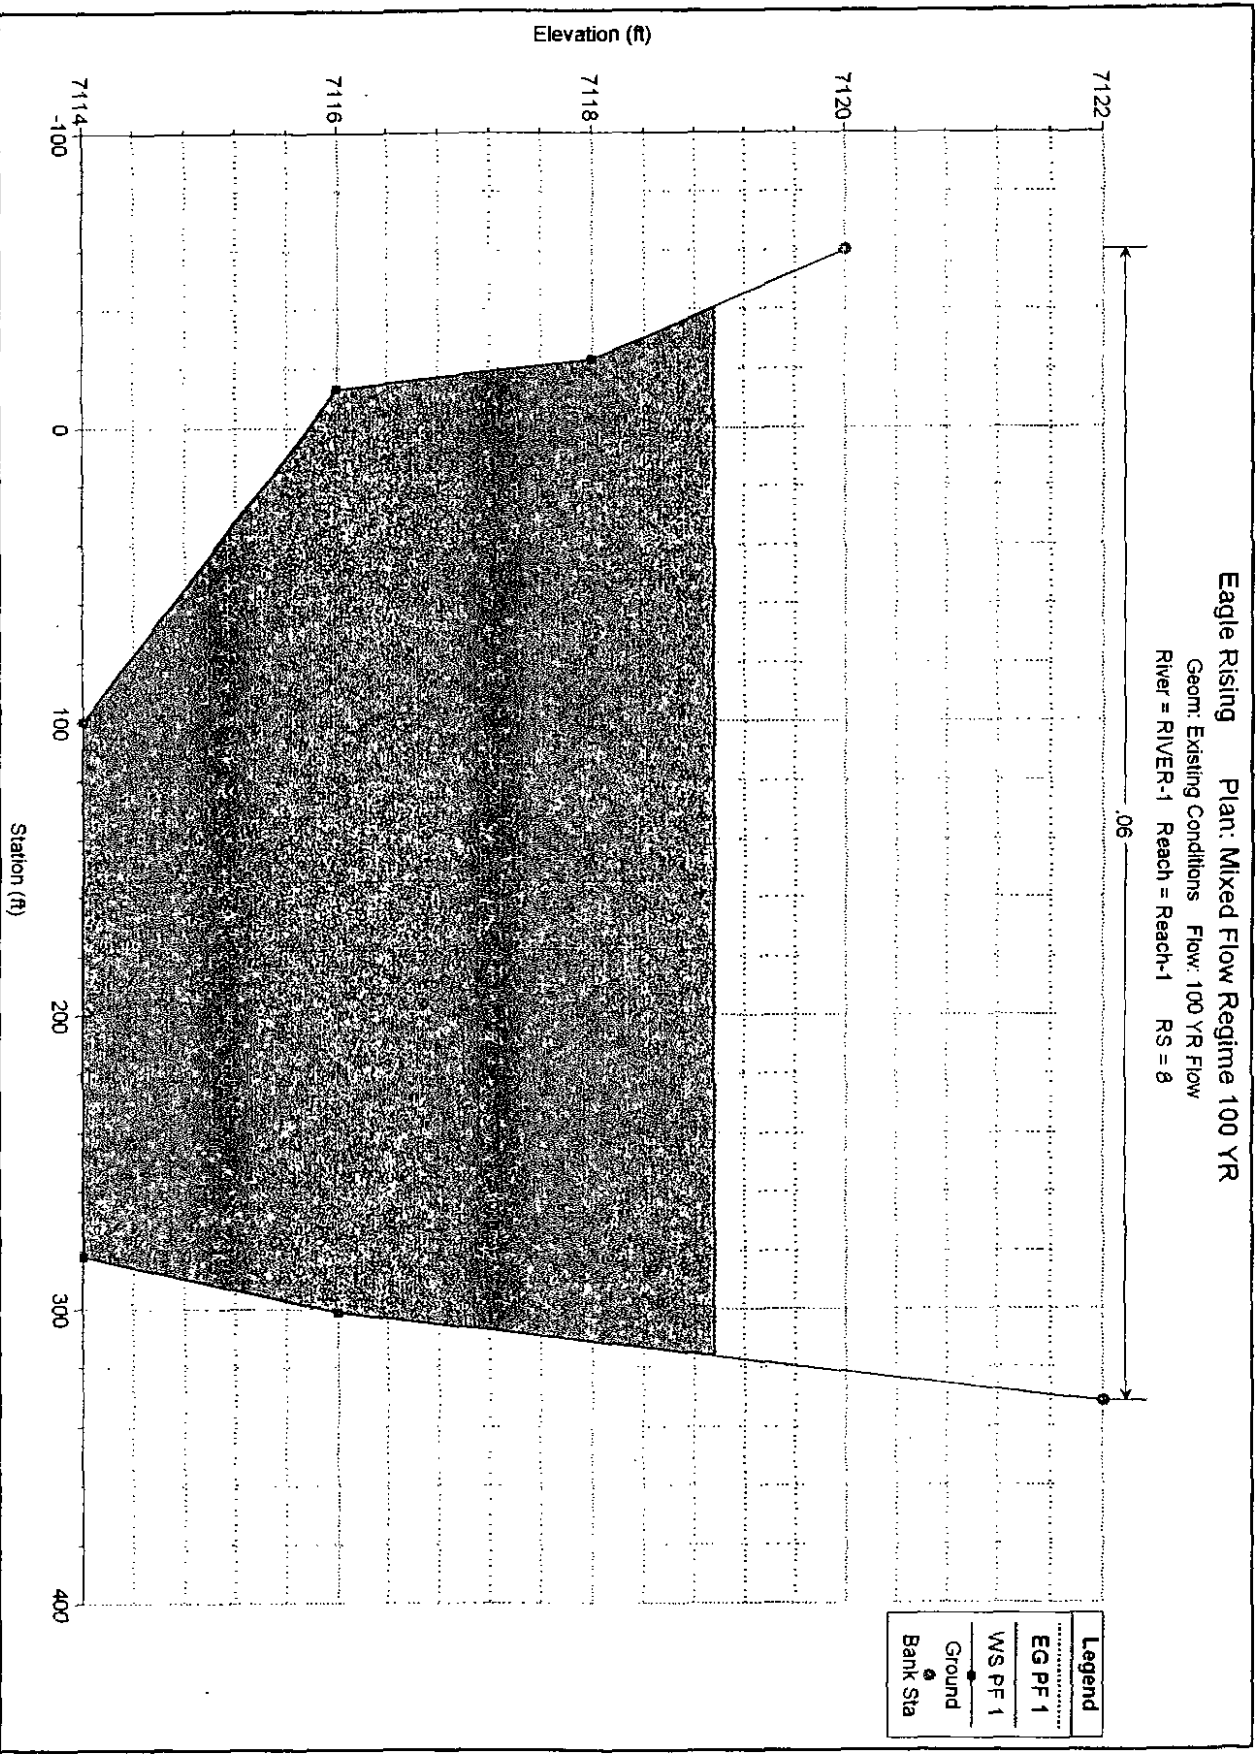


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 10

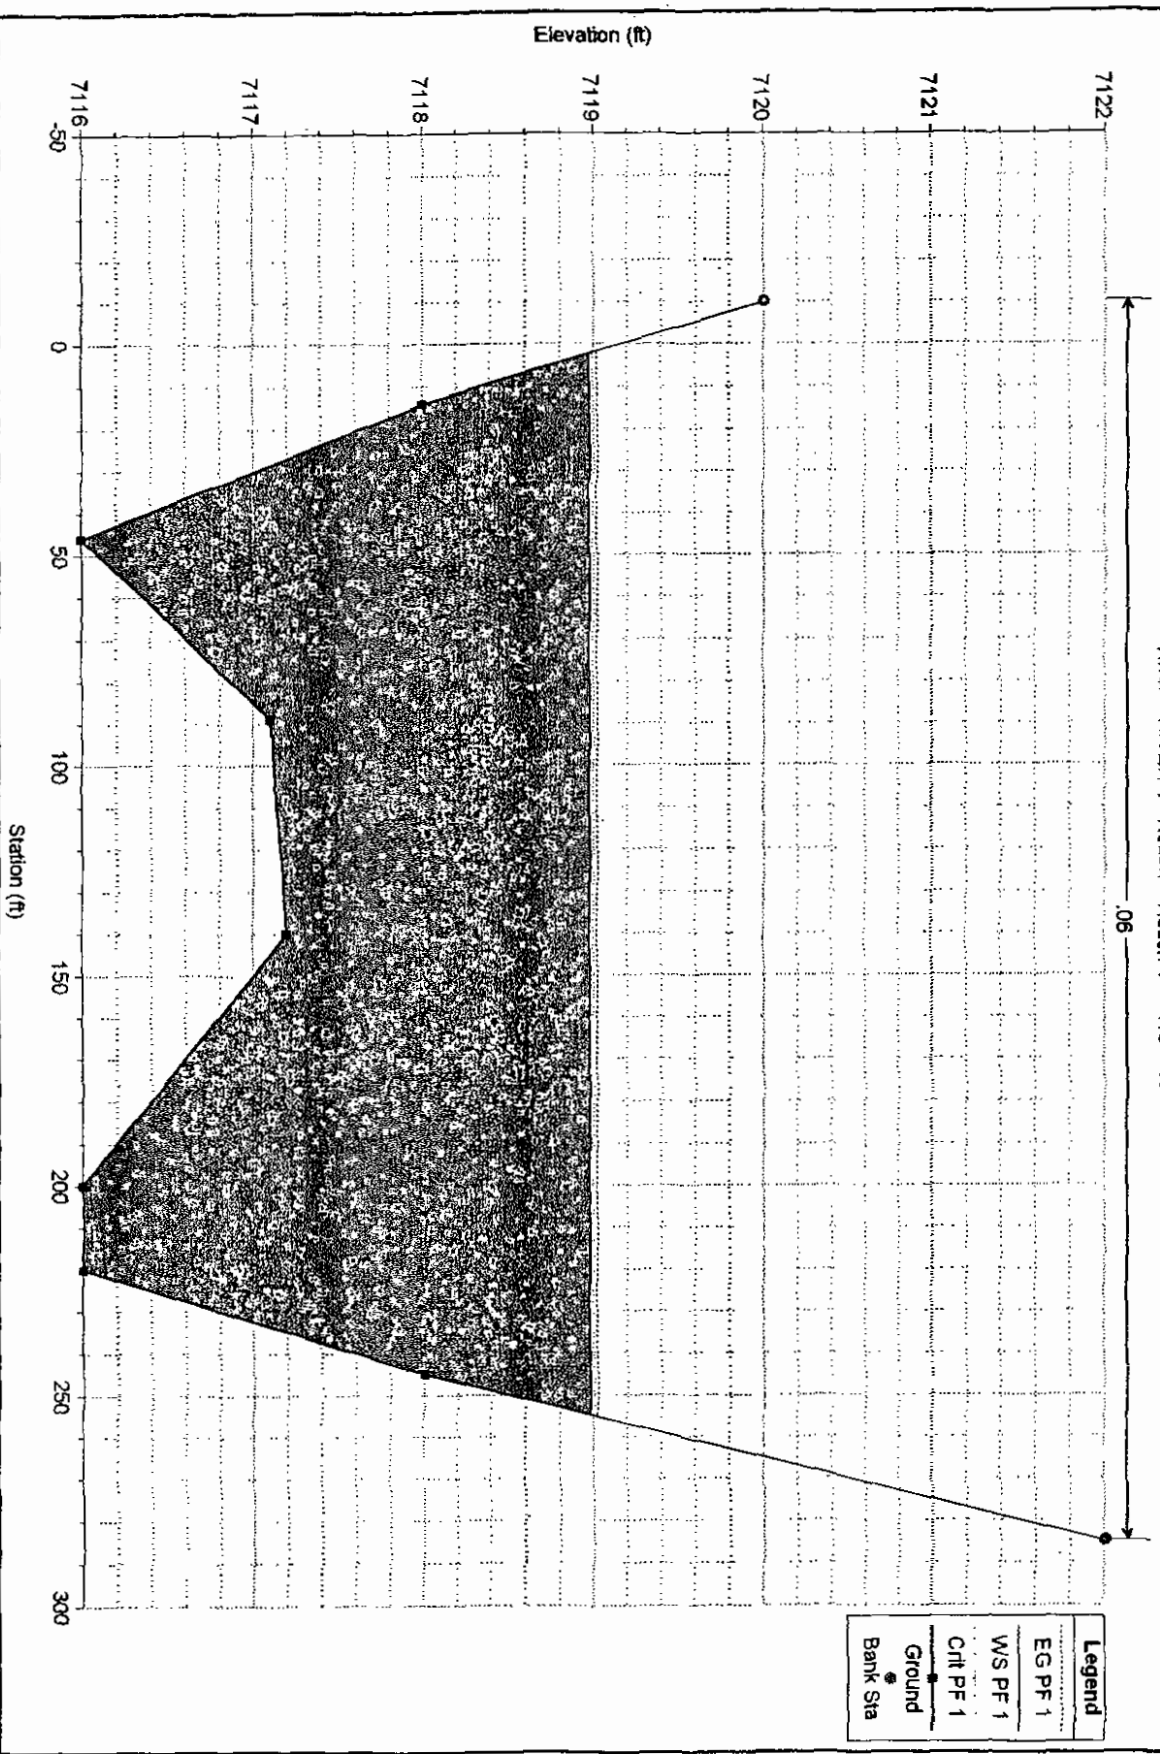

**Eagle Rising Plan: Mixed Flow Regime 100 YR**


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 11

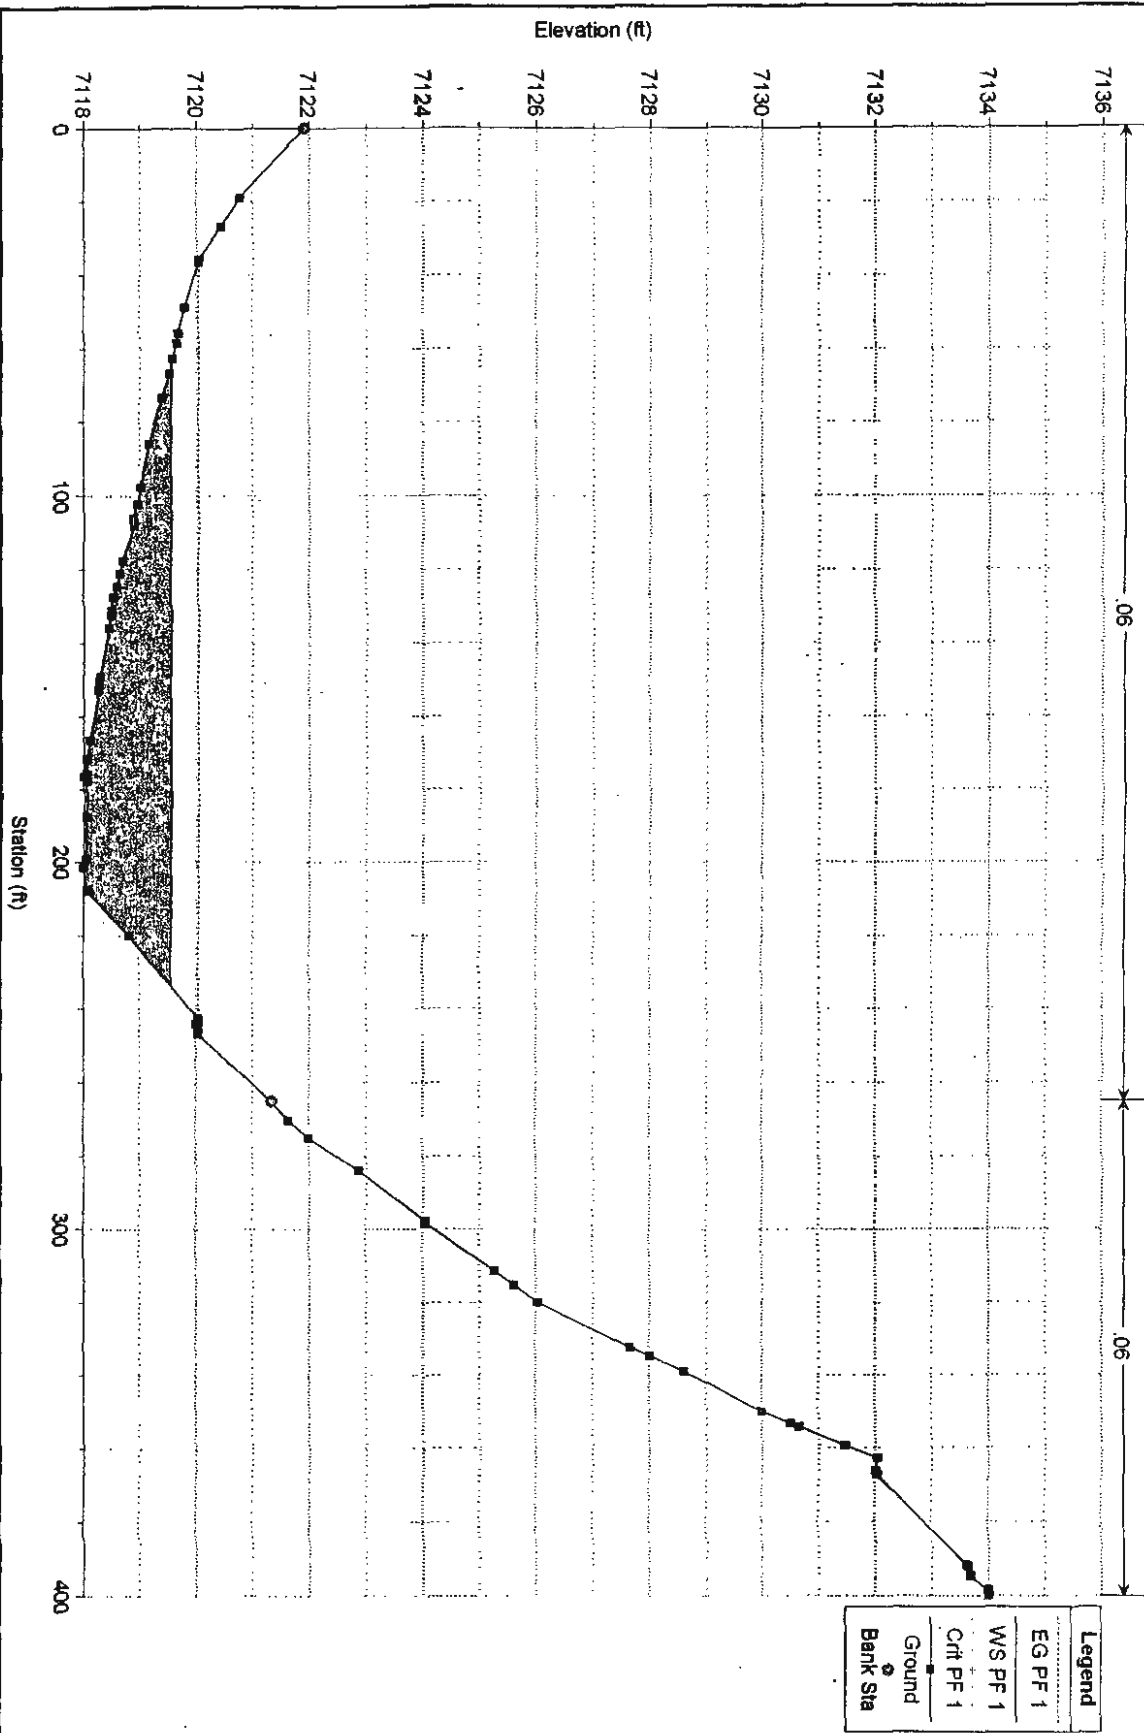

Legend	
EG PF 1	
WS PF 1	
Cr/P PF 1	
Ground	
Bank Sta	

# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 12

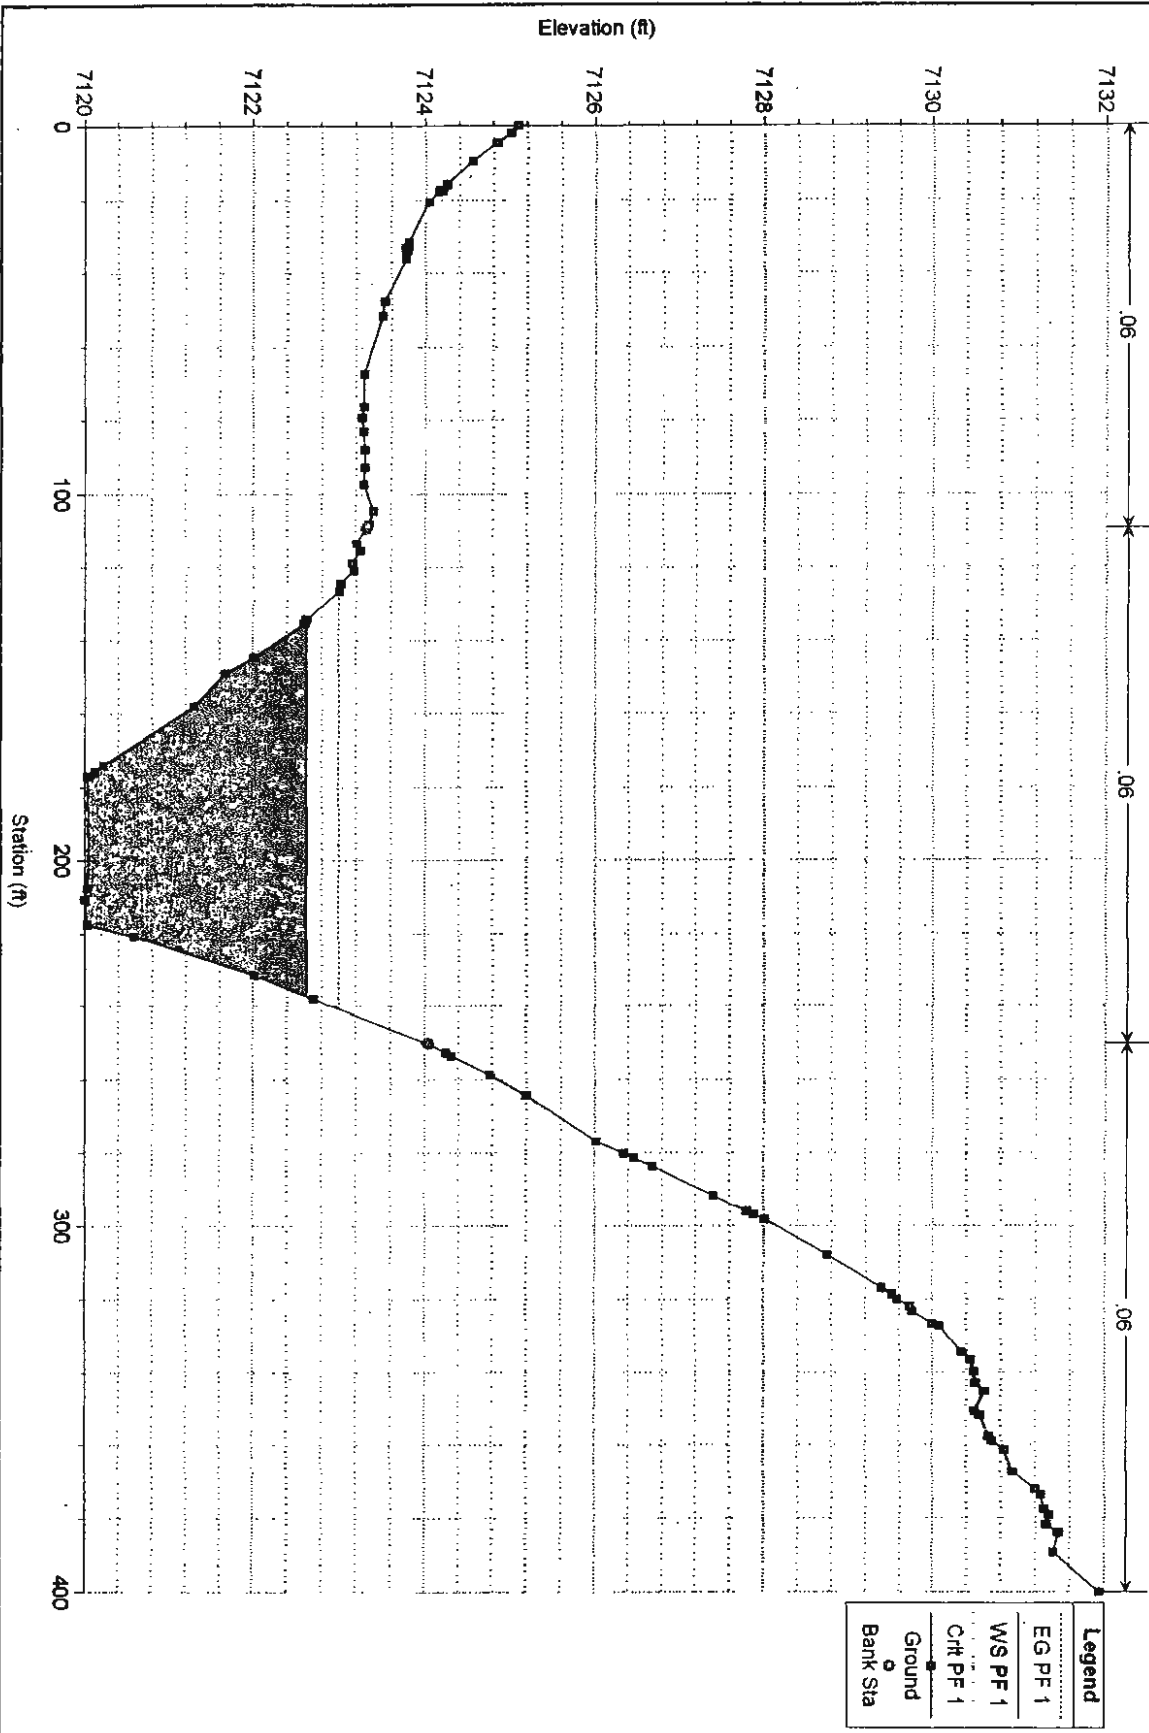


Legend	
EG PF 1	Water Surface
WS PF 1	Channel Bottom
C/B PF 1	Channel Bottom
Ground	Ground Elevation
Bank Sta	Bank Station




# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 13

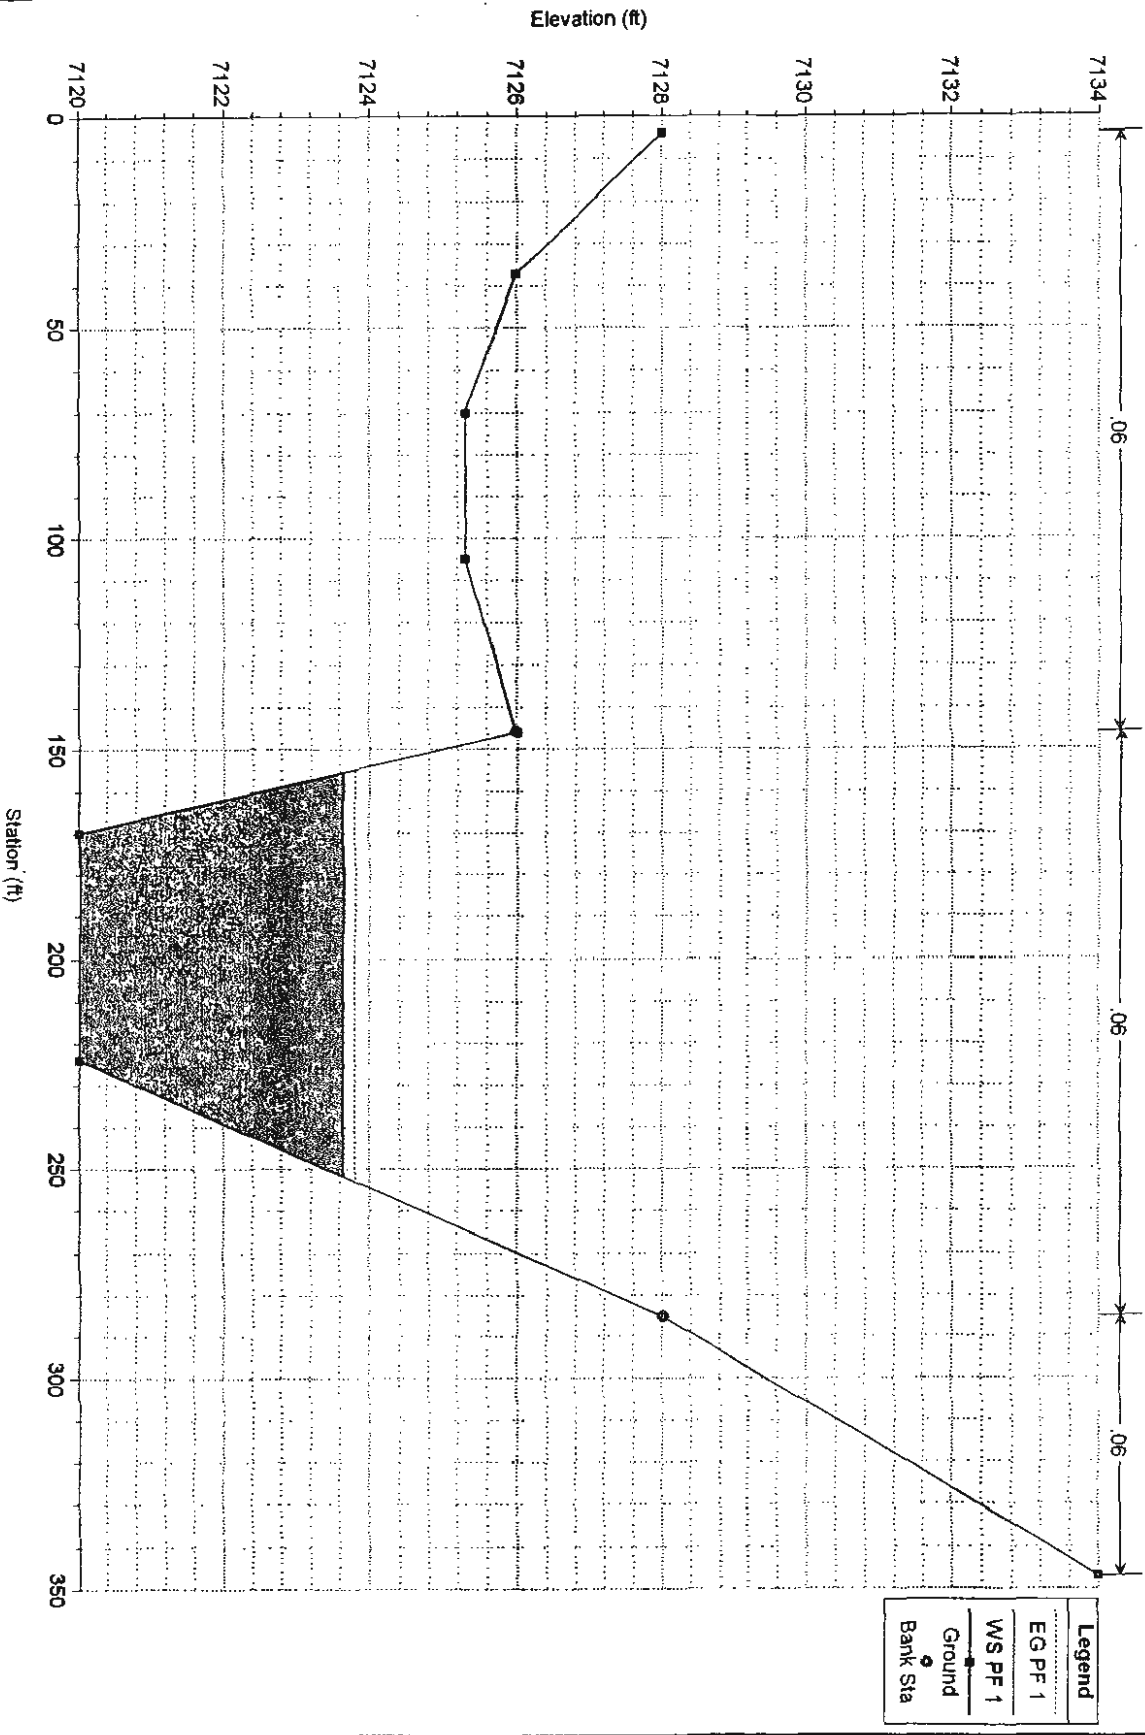


### Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 14

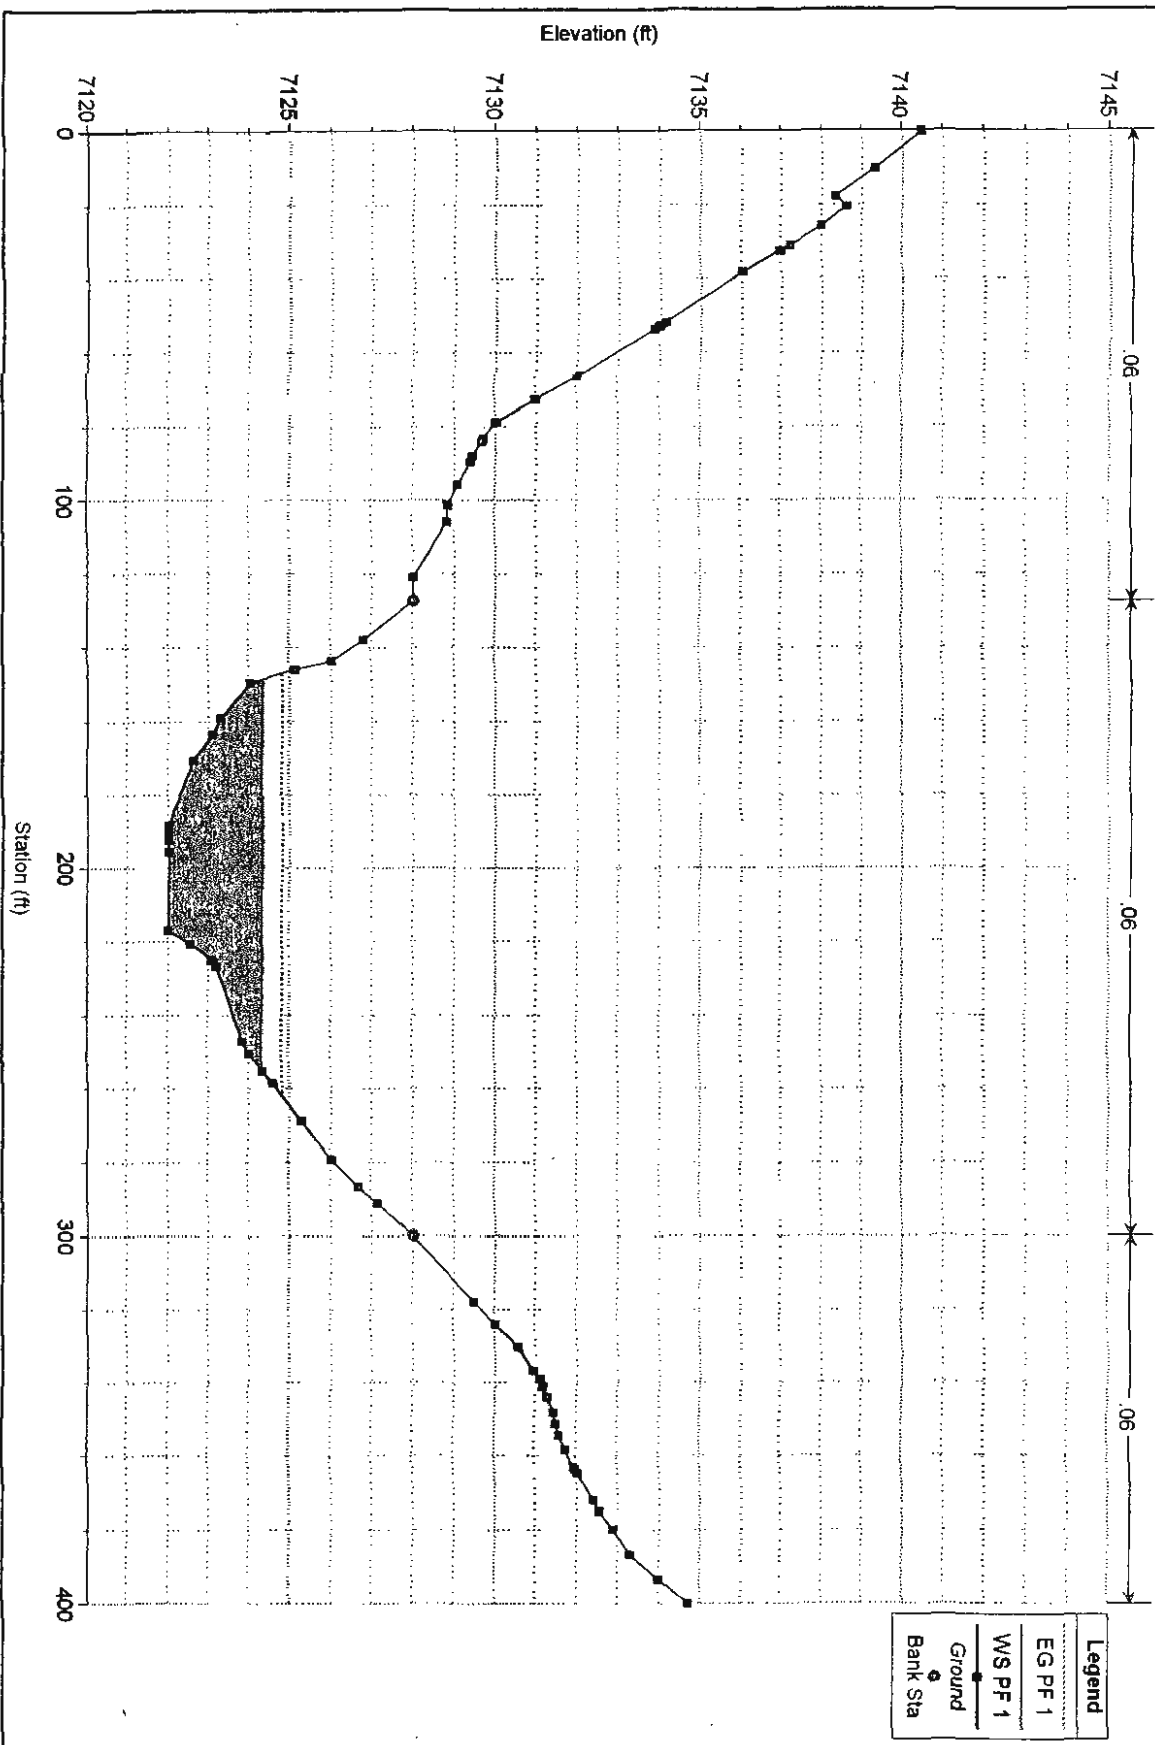

**Eagle Rising Plan: Mixed Flow Regime 100 YR**


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 15

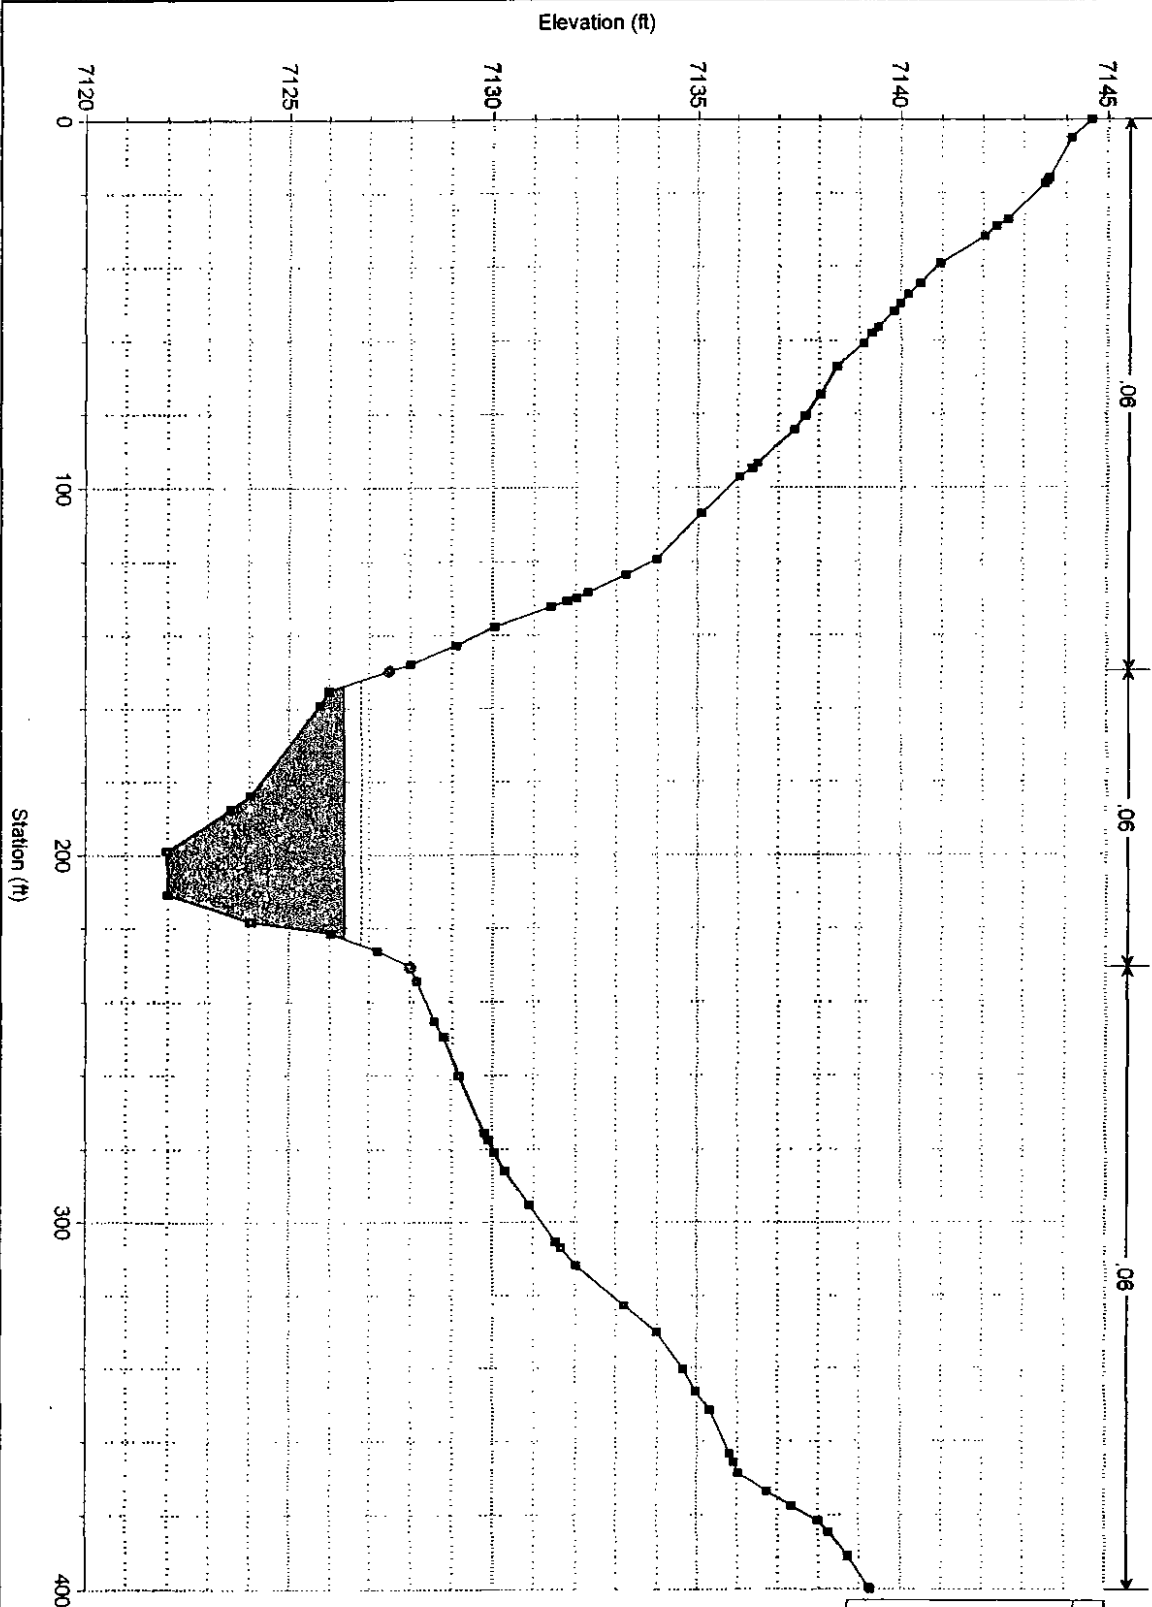

Legend	
EG PF 1	—
WS PF 1	—
Crt PF 1	—
Ground	■
Bank Sta	●

Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 16

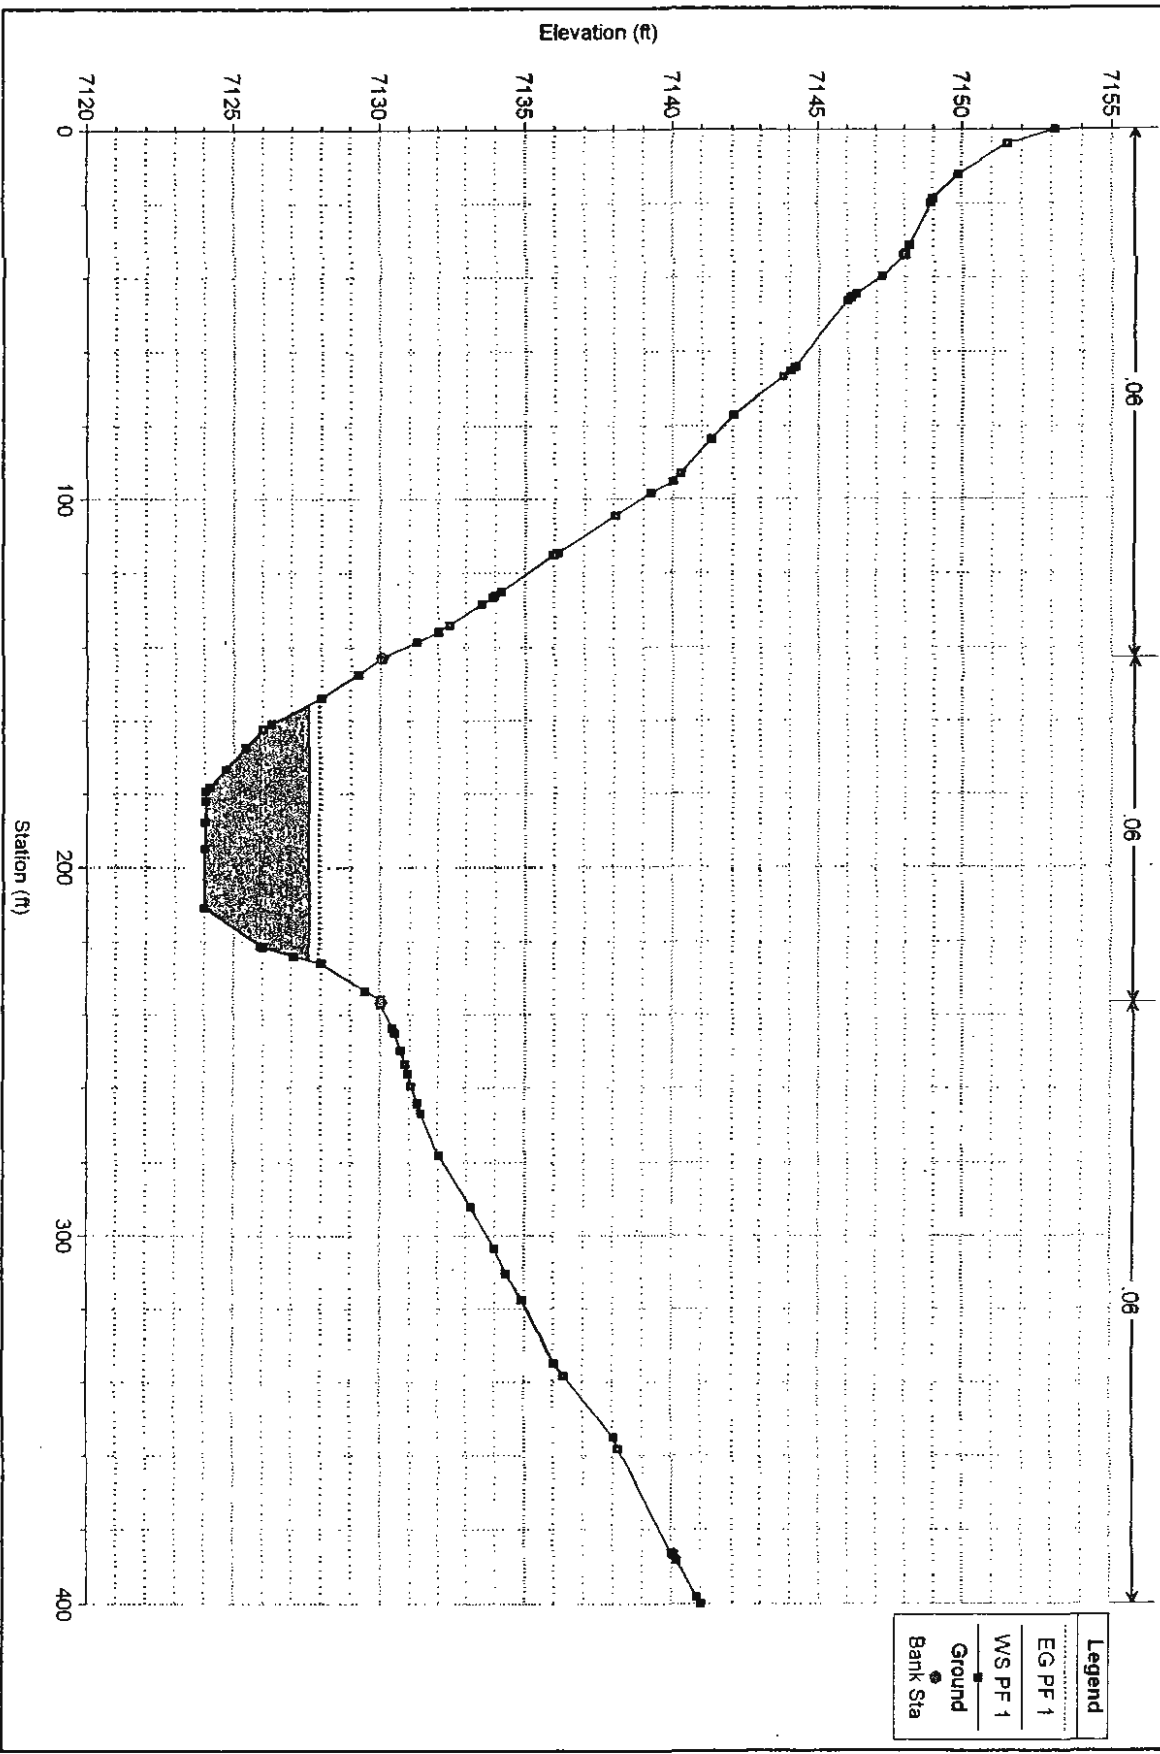

Legend	
EG PF 1	□
WS PF 1	□
Ground	●
Bank Sta	●


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 17

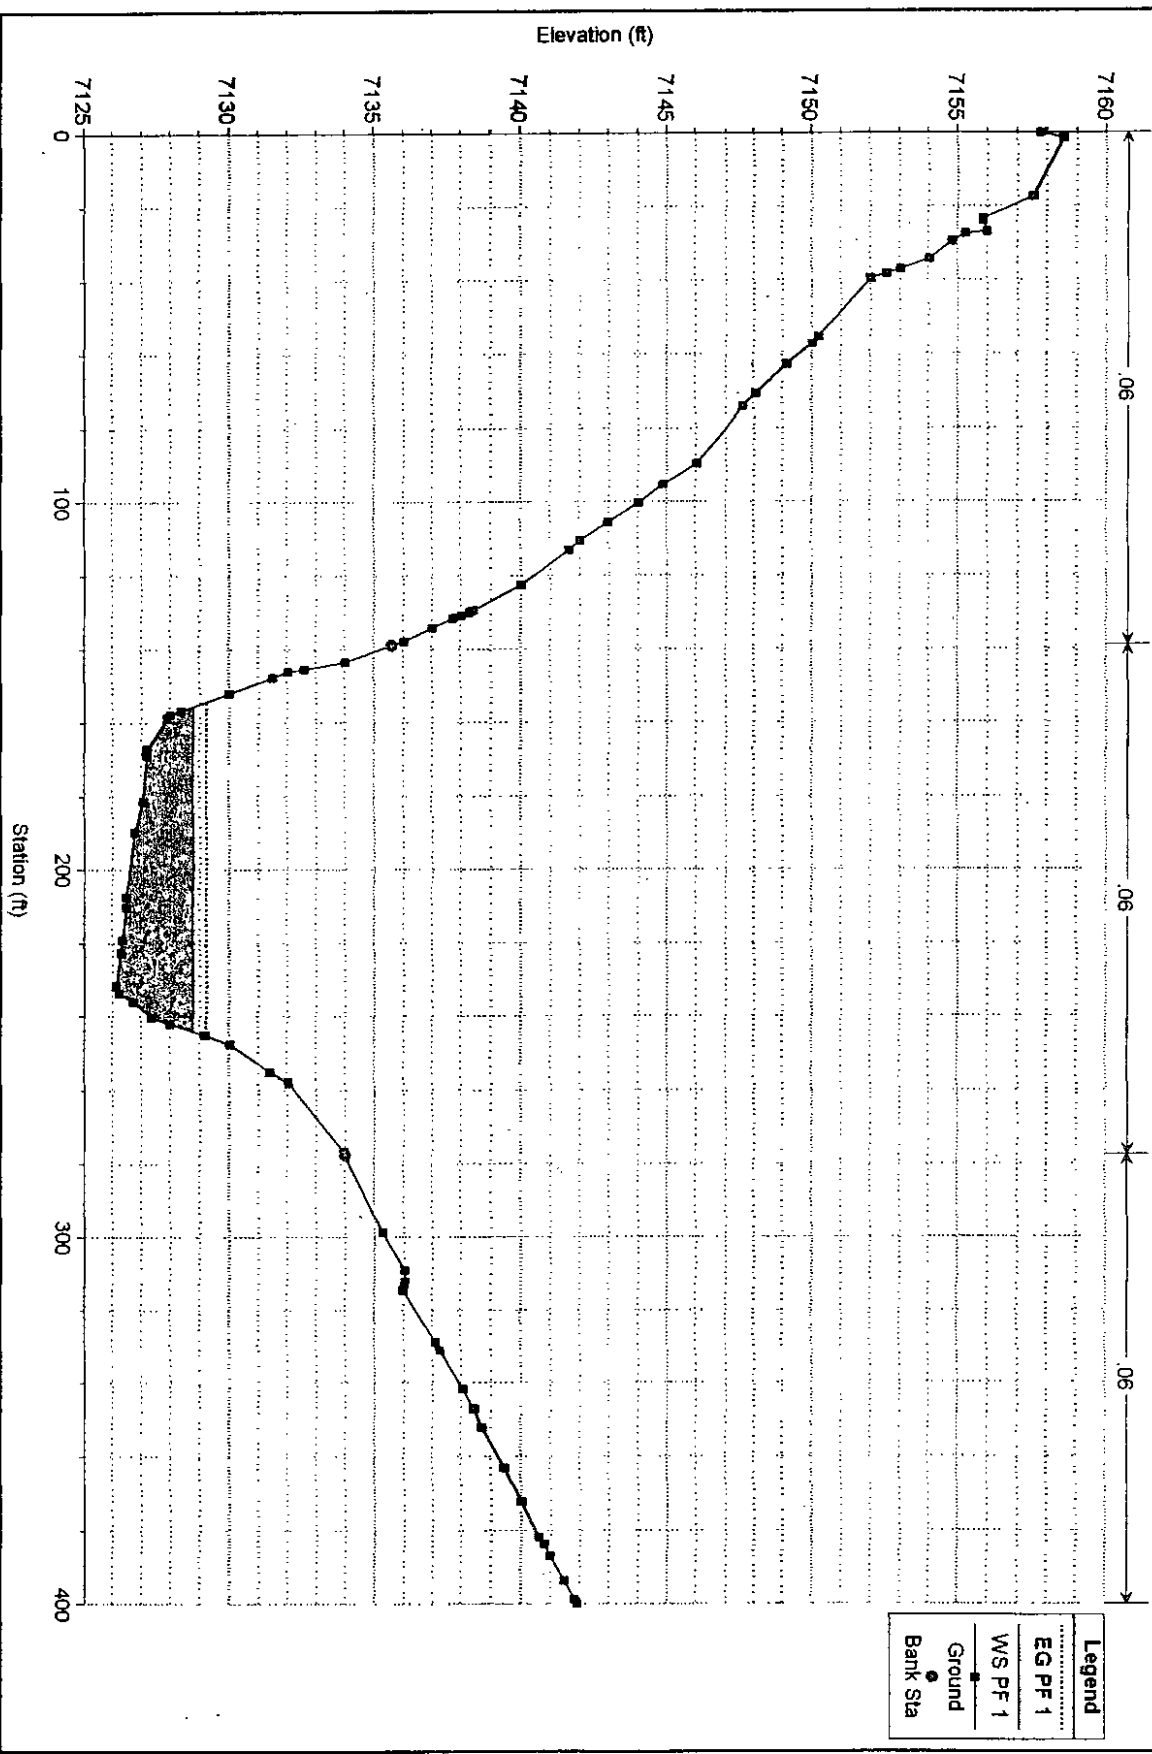

# Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 18

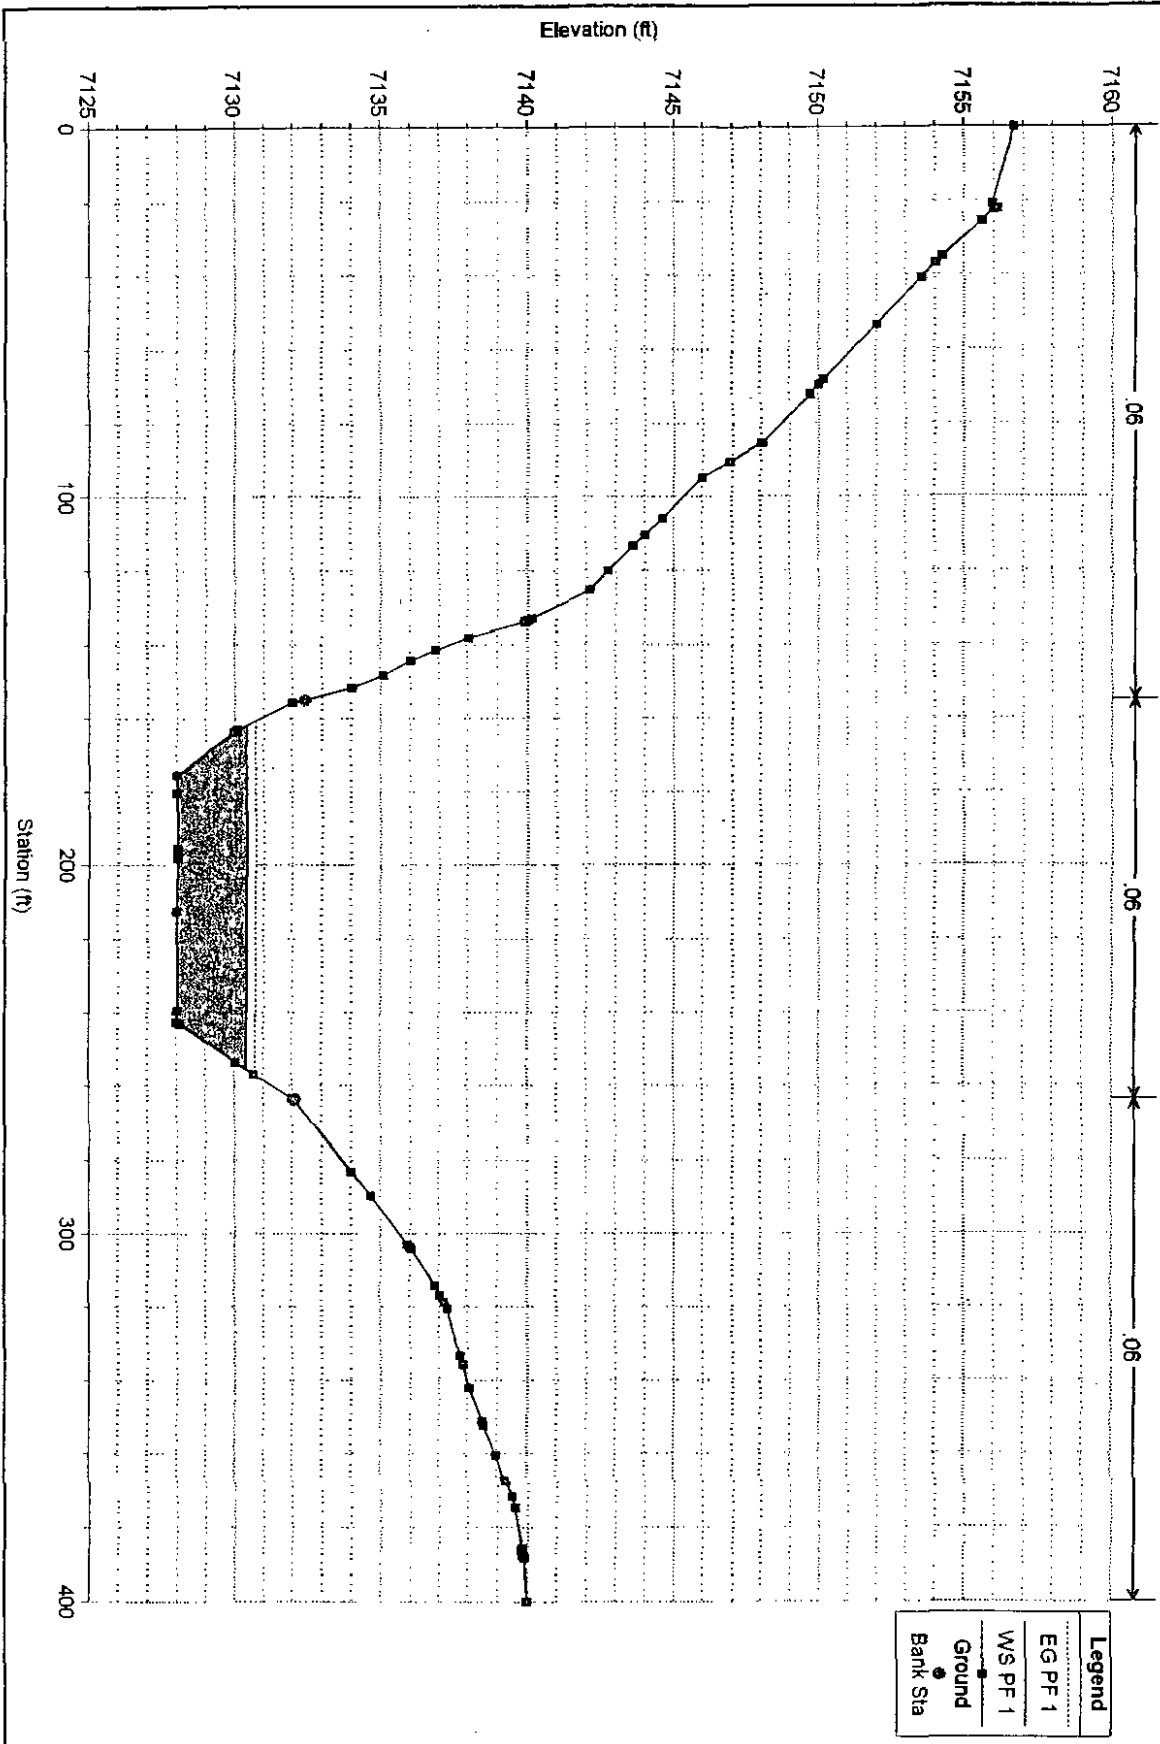

Legend
EG PF 1
WS PF 1
Ground
Bank Sta

# Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 19

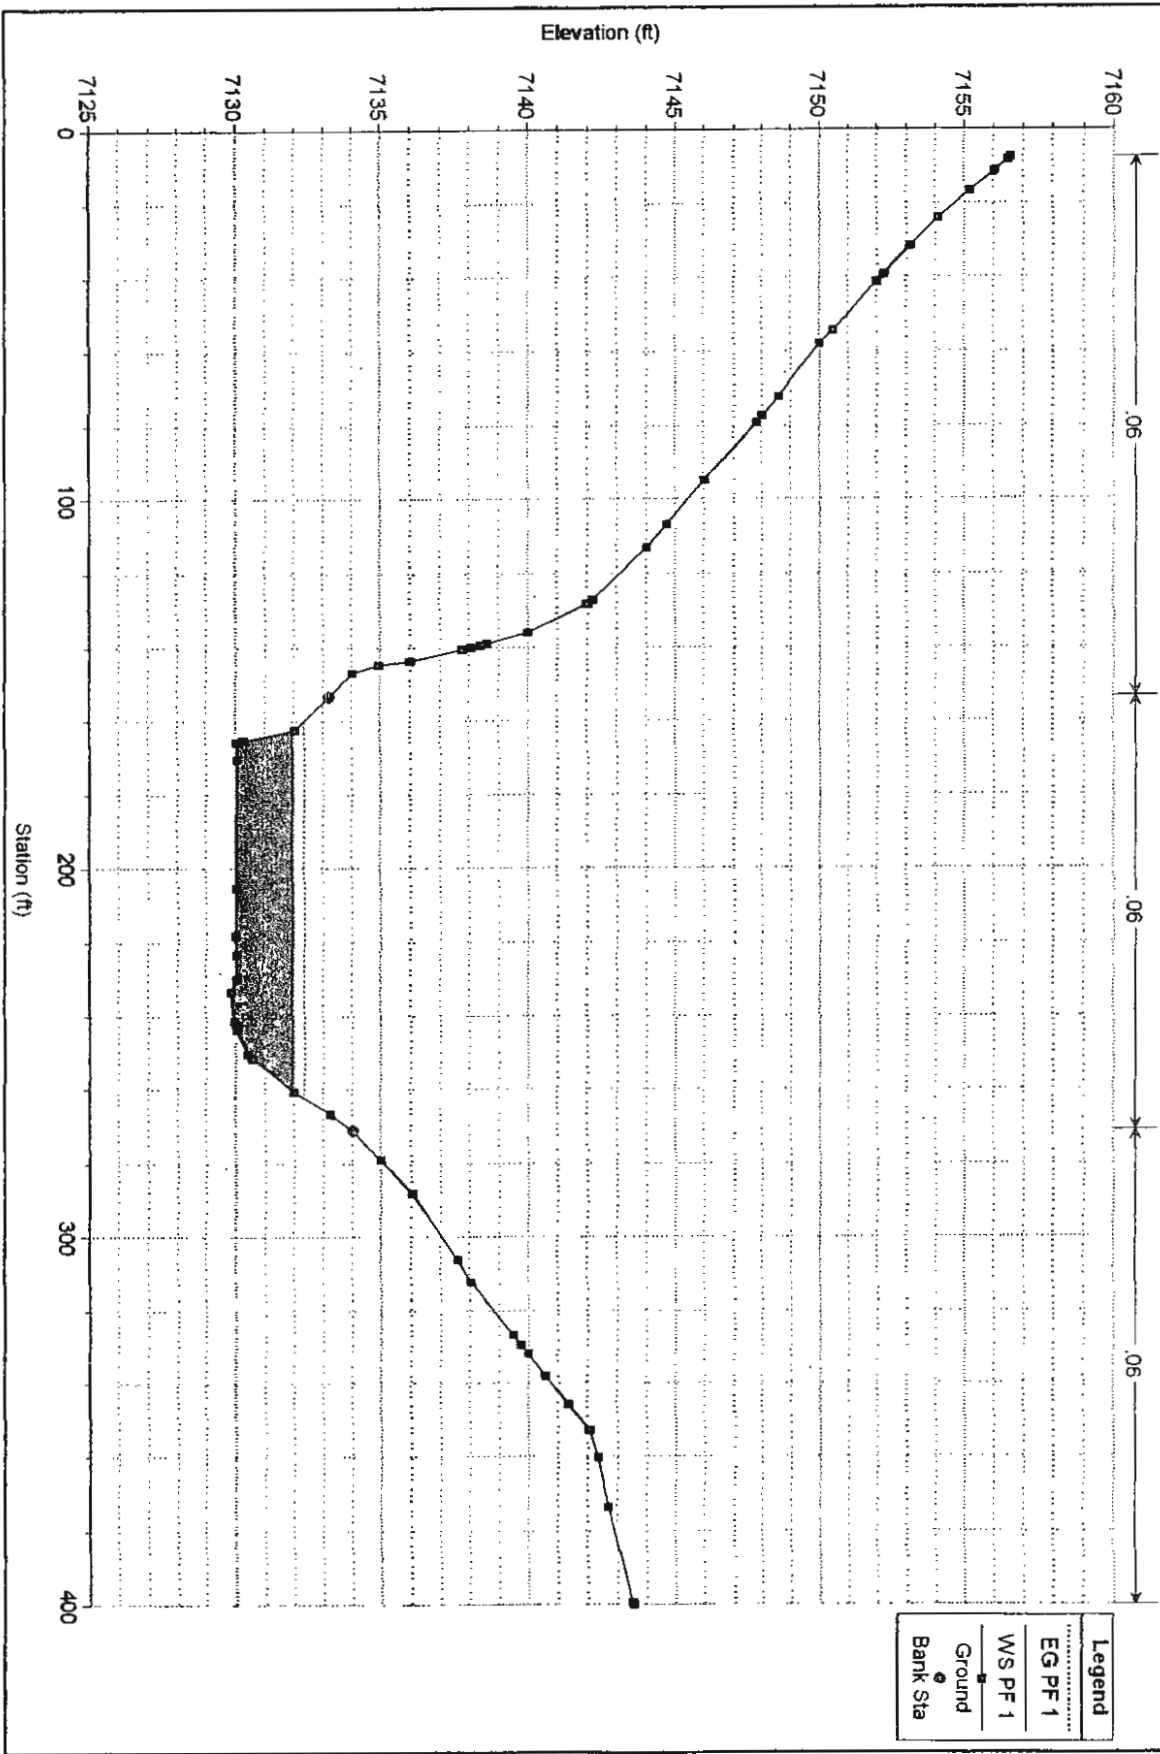

Legend
EG PF 1
WS PF 1
Ground
Bank Sta


**Eagle Rising Plan: Mixed Flow Regime 100 YR**

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 20

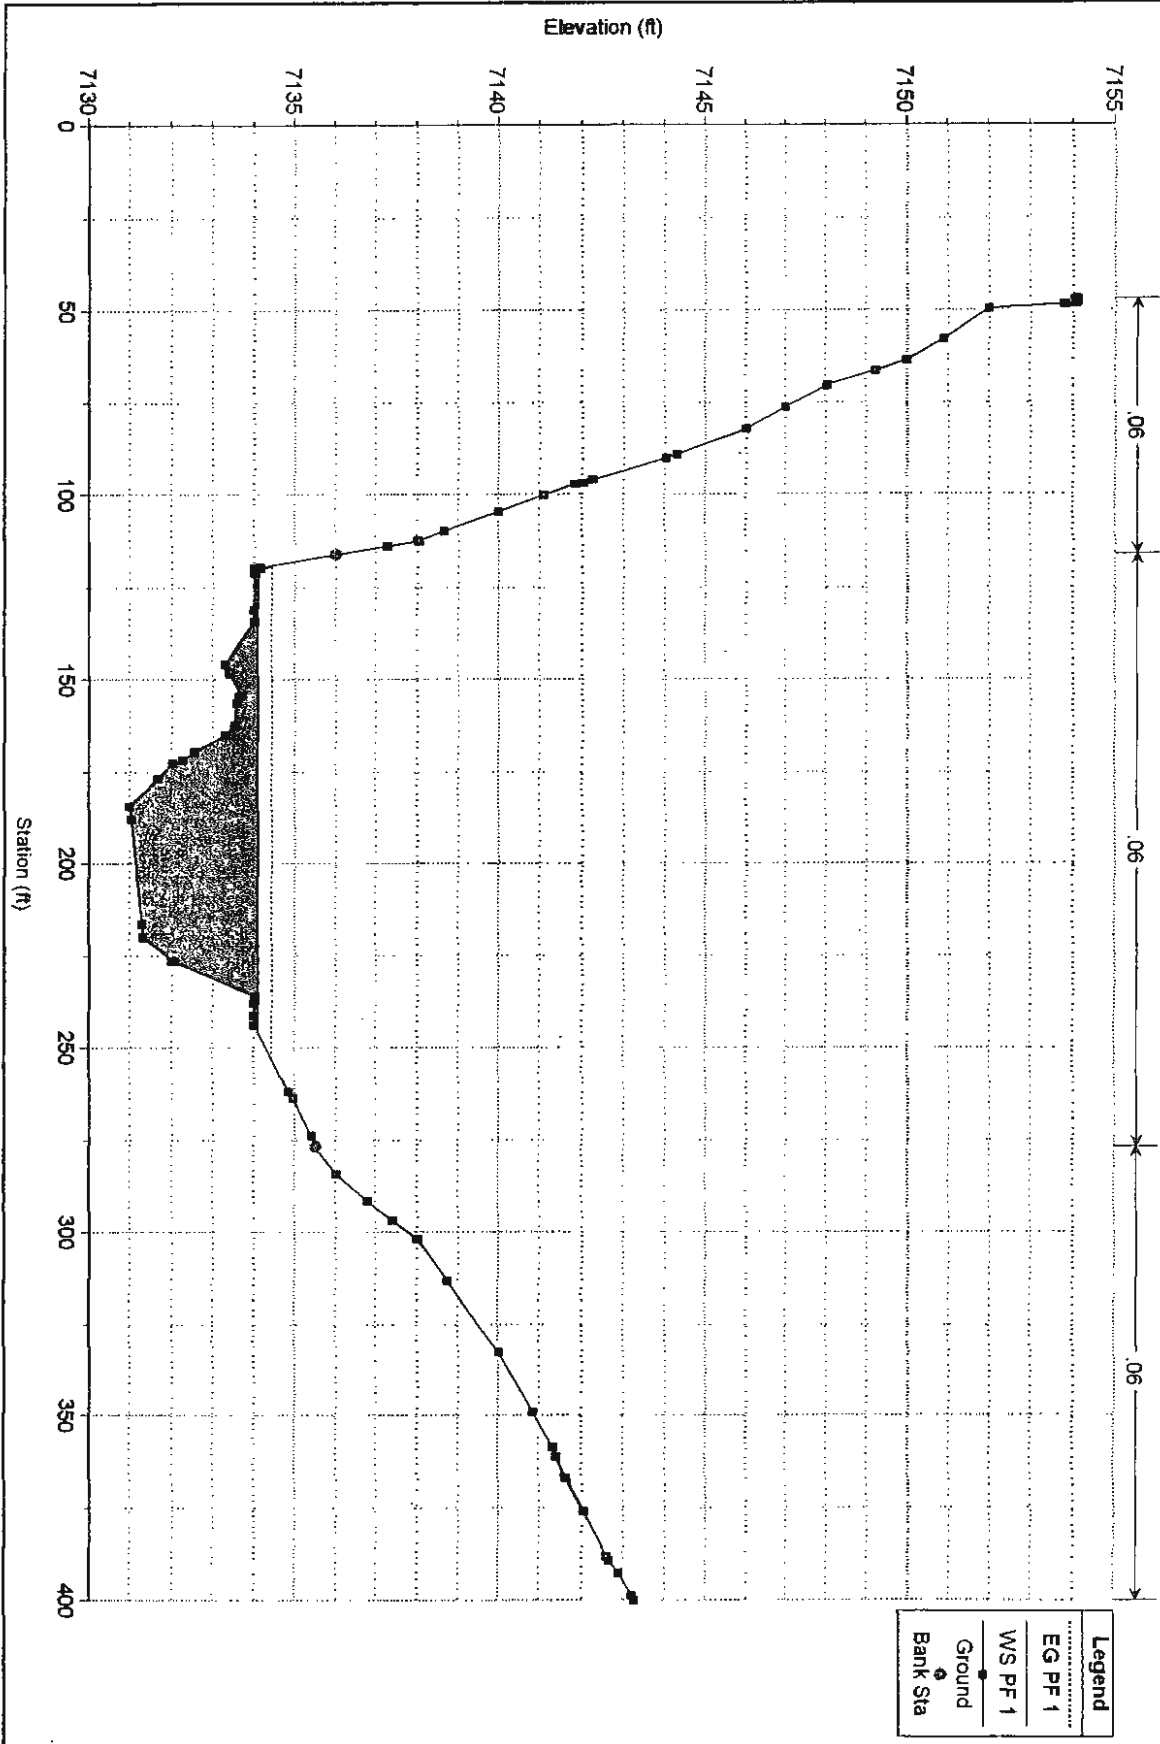




Eagle Rising Plan: Mixed Flow Regime 100 YR  
 Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 21

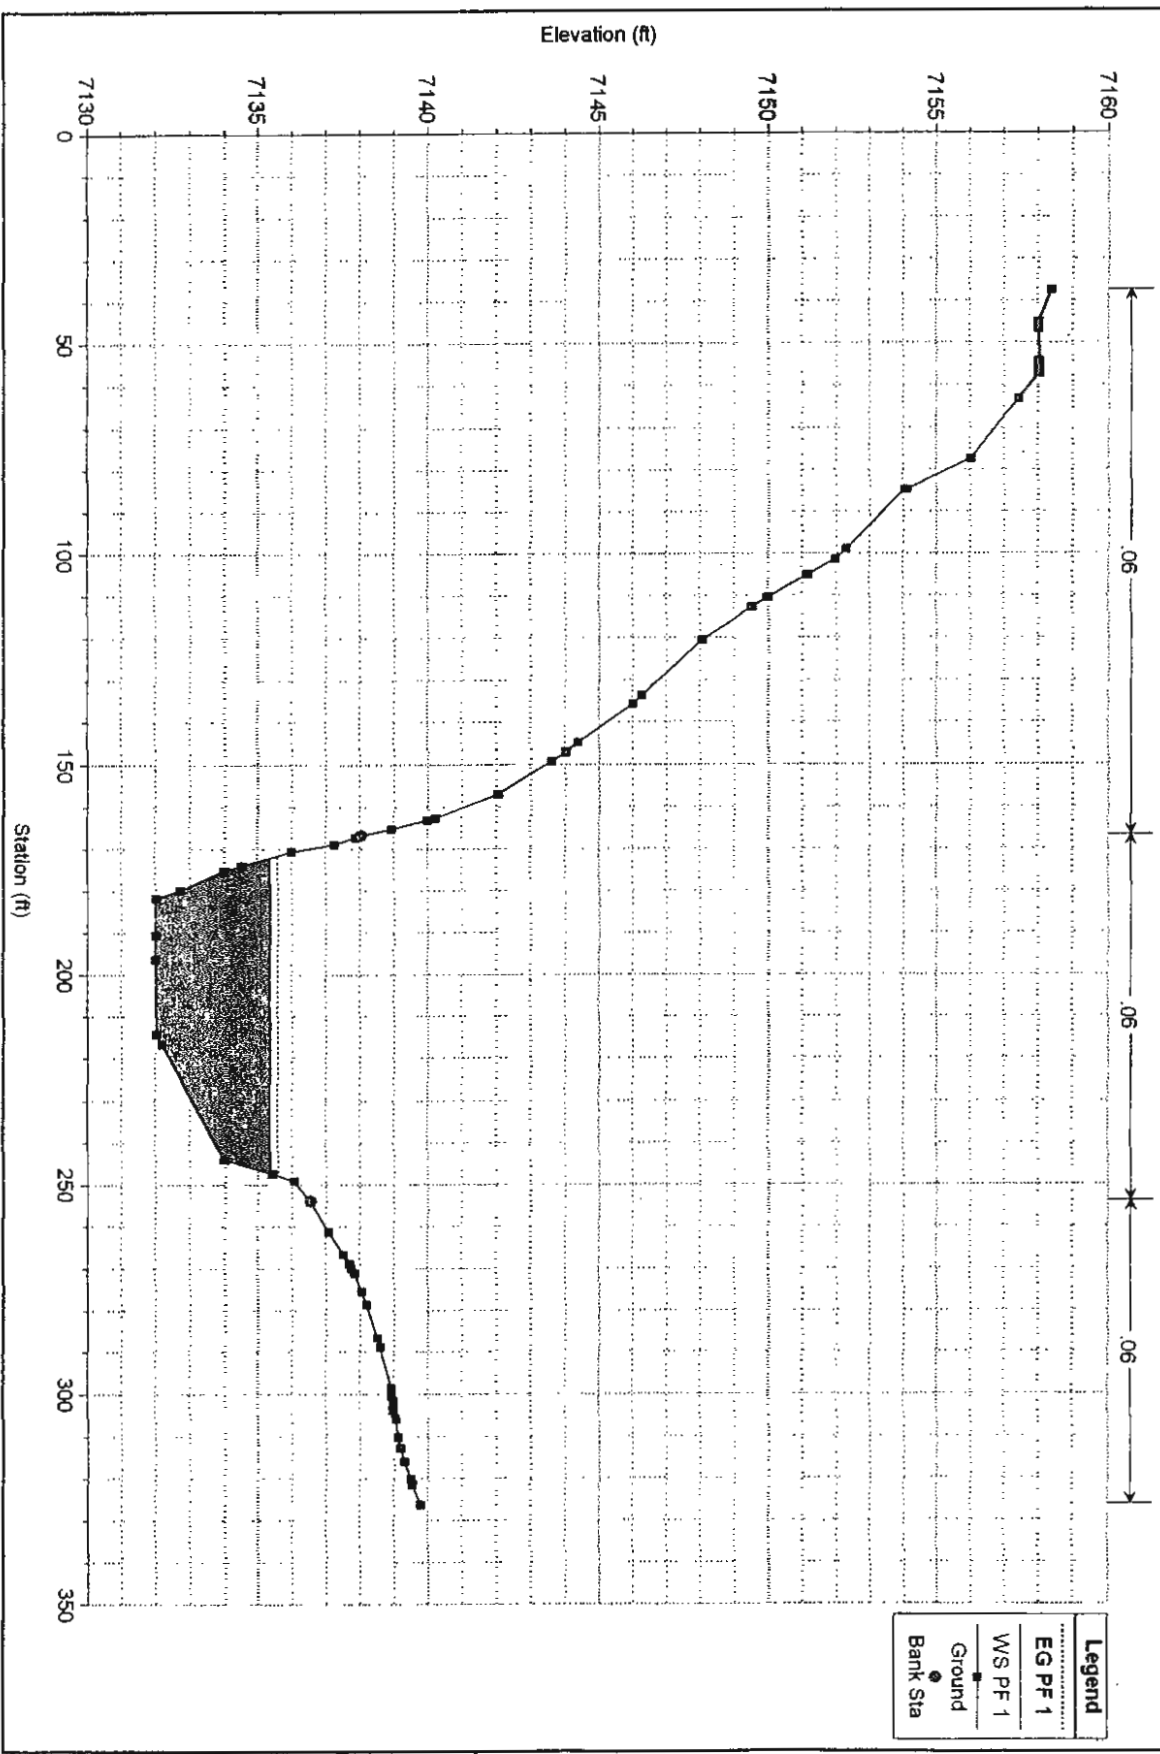

**Eagle Rising Plan: Mixed Flow Regime 100 YR**

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 22

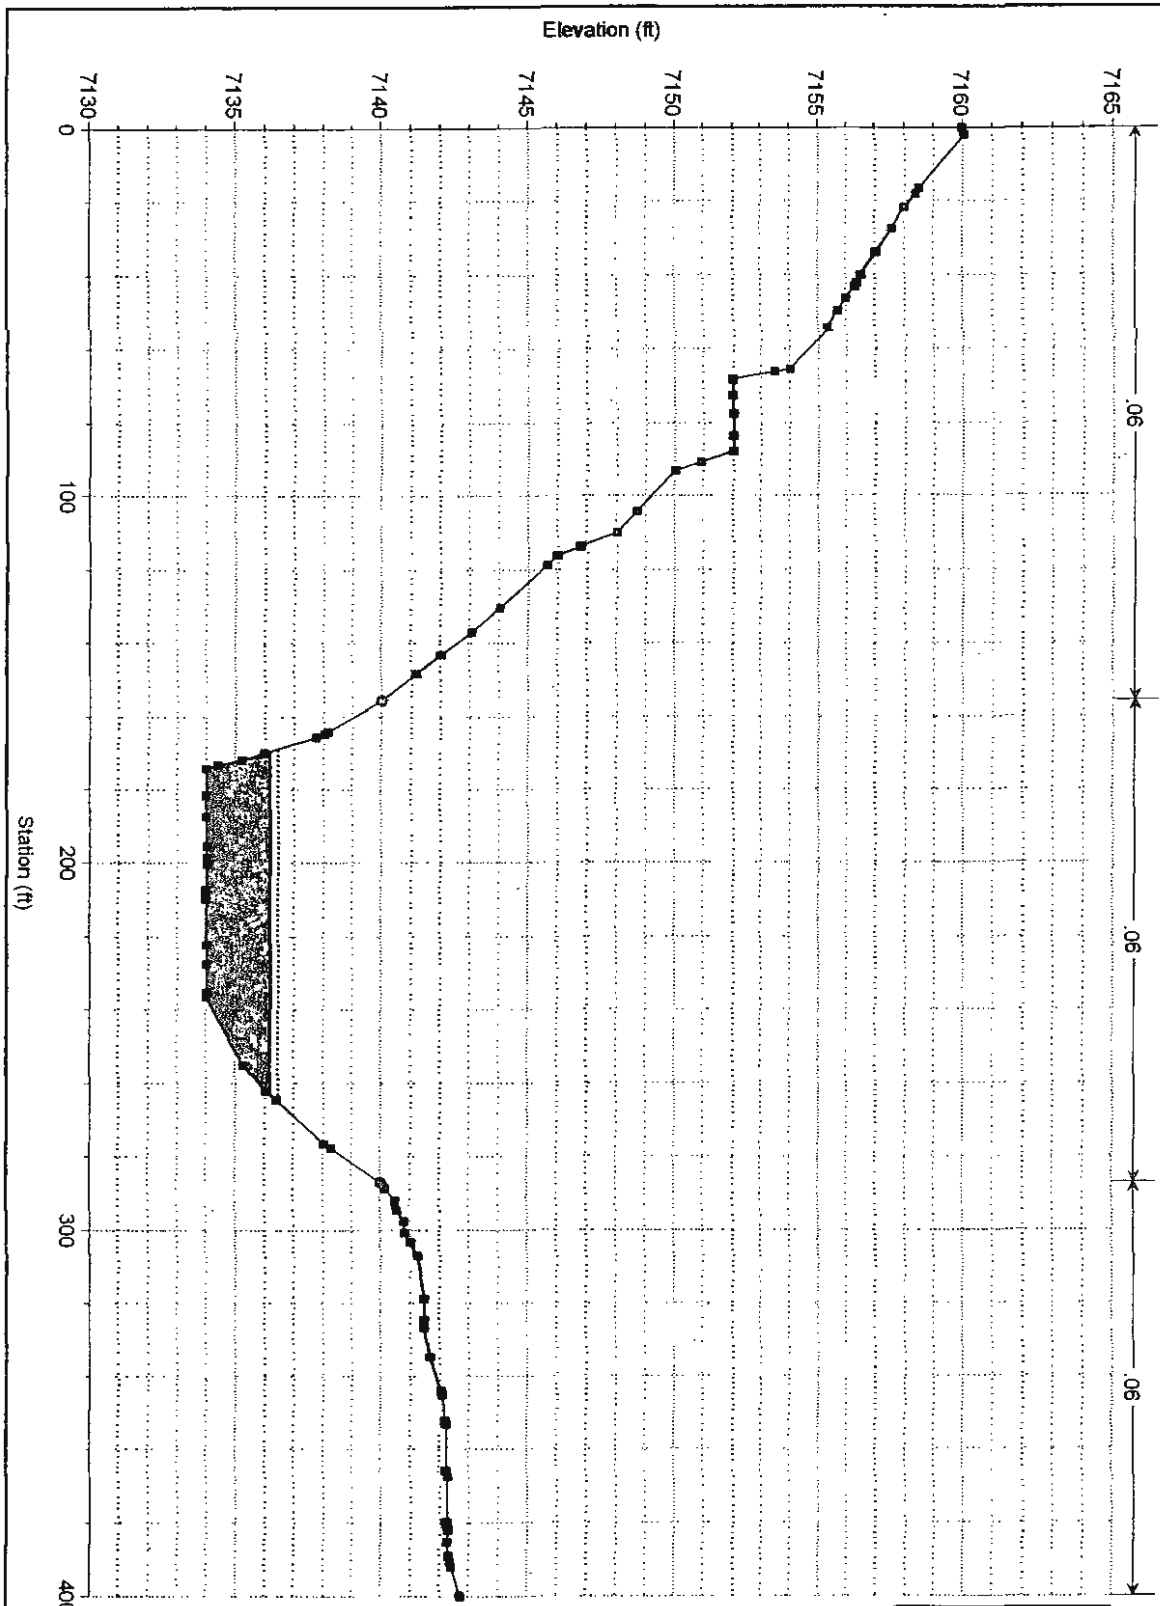


0.06 0.06 0.06 0.06

Legend	
EG PF 1	Ground
WS PF 1	Bank Sta

### Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 24.5

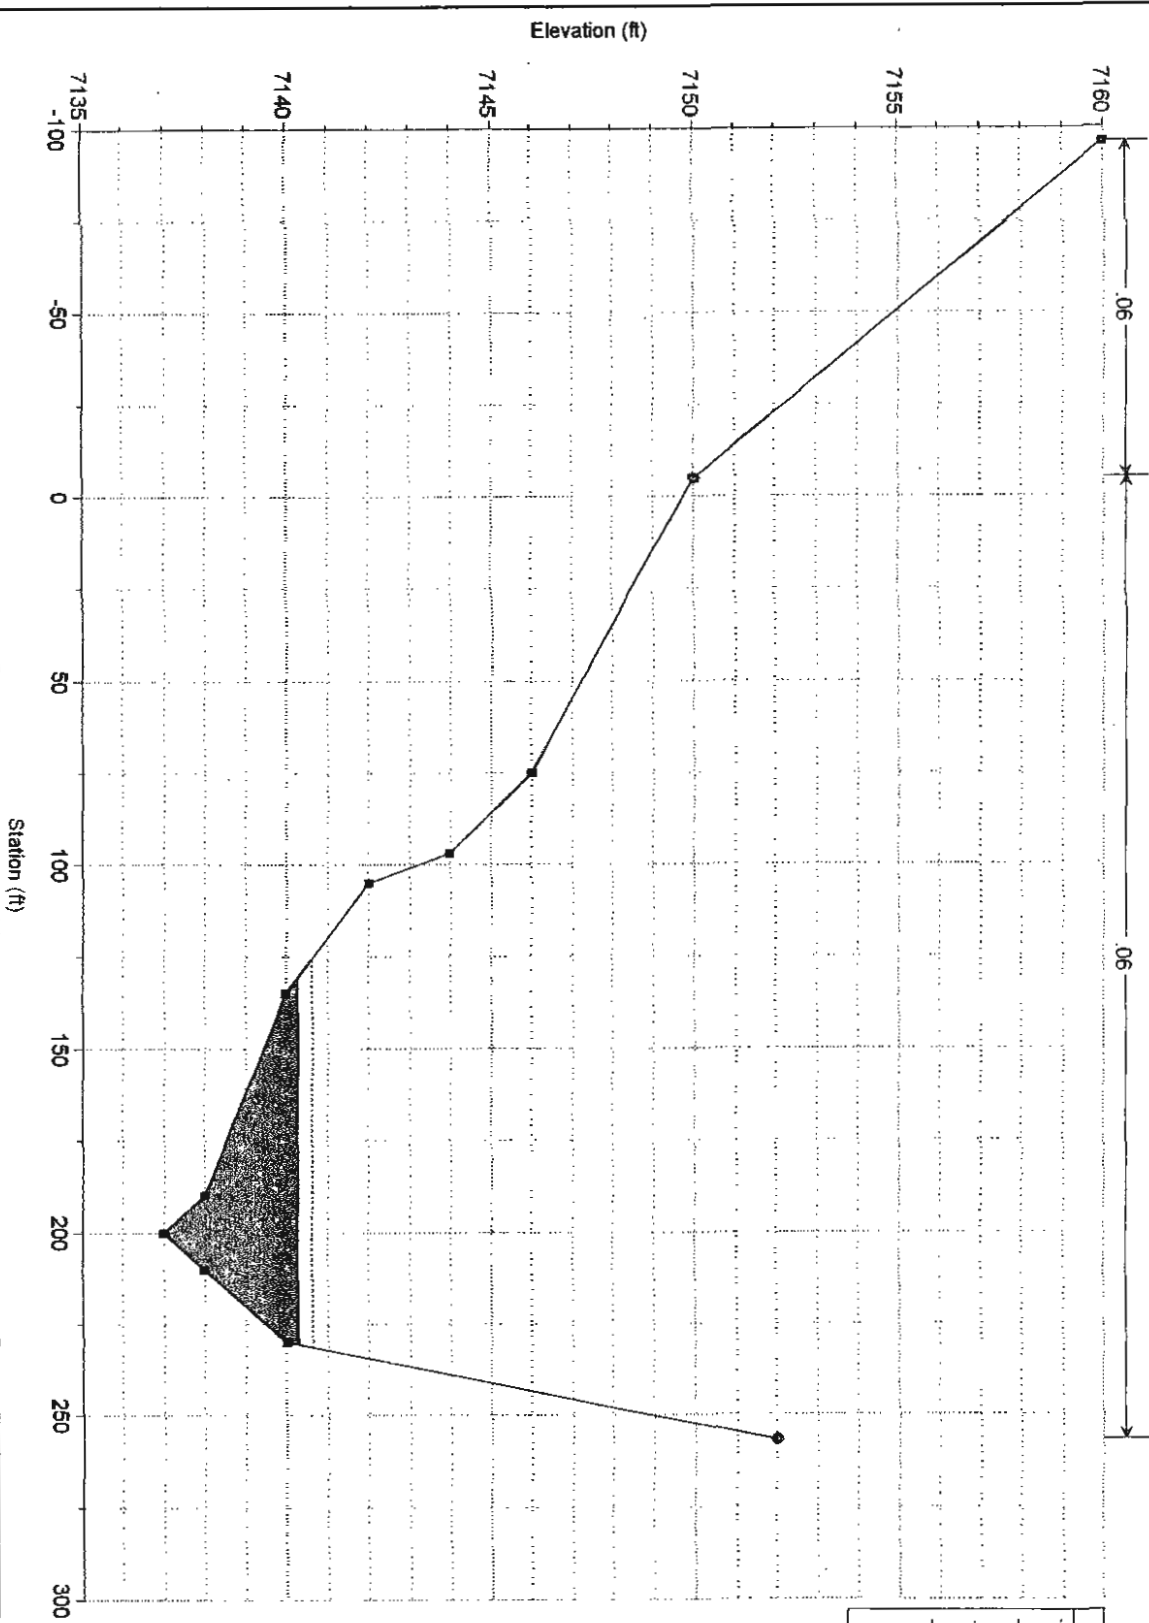

Legend	
EG PF 1	—
WS PF 1	—
C/I PF 1	—
Ground	●
Bank Sta	◆


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 26.65

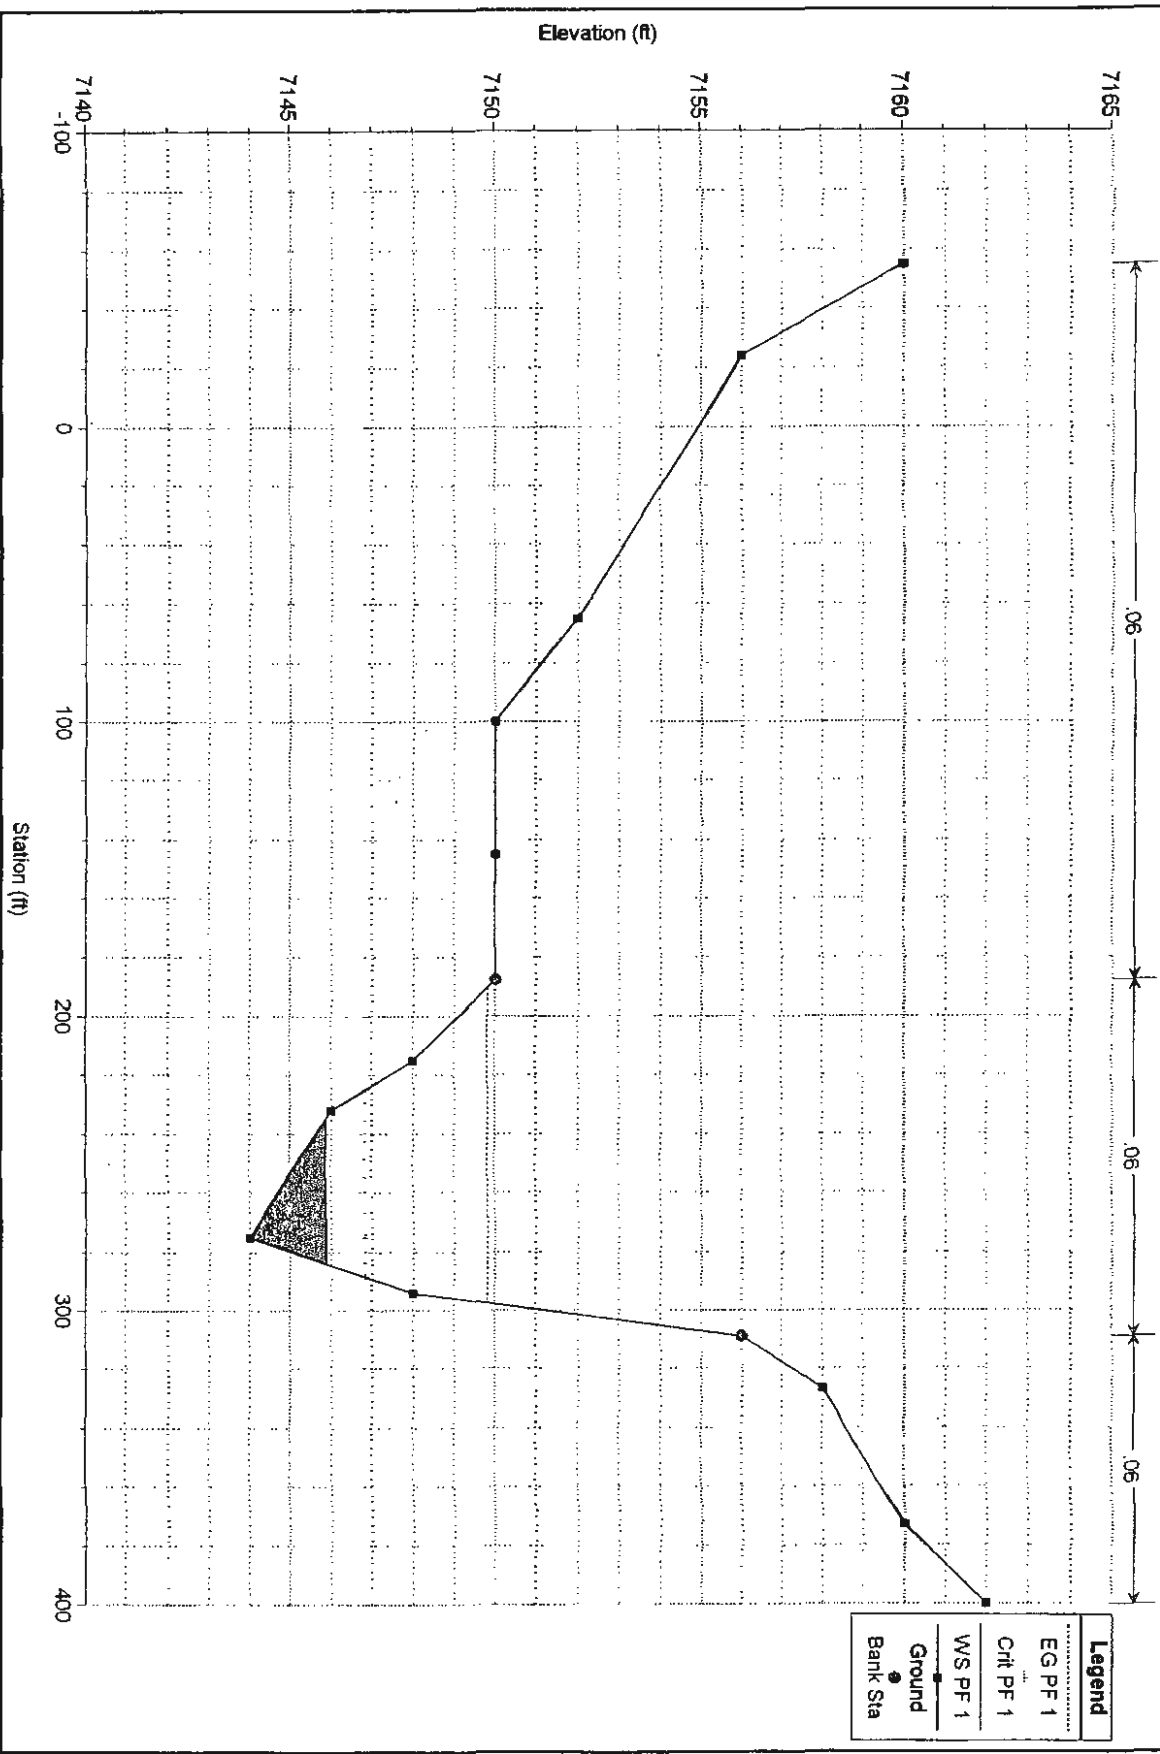


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 27

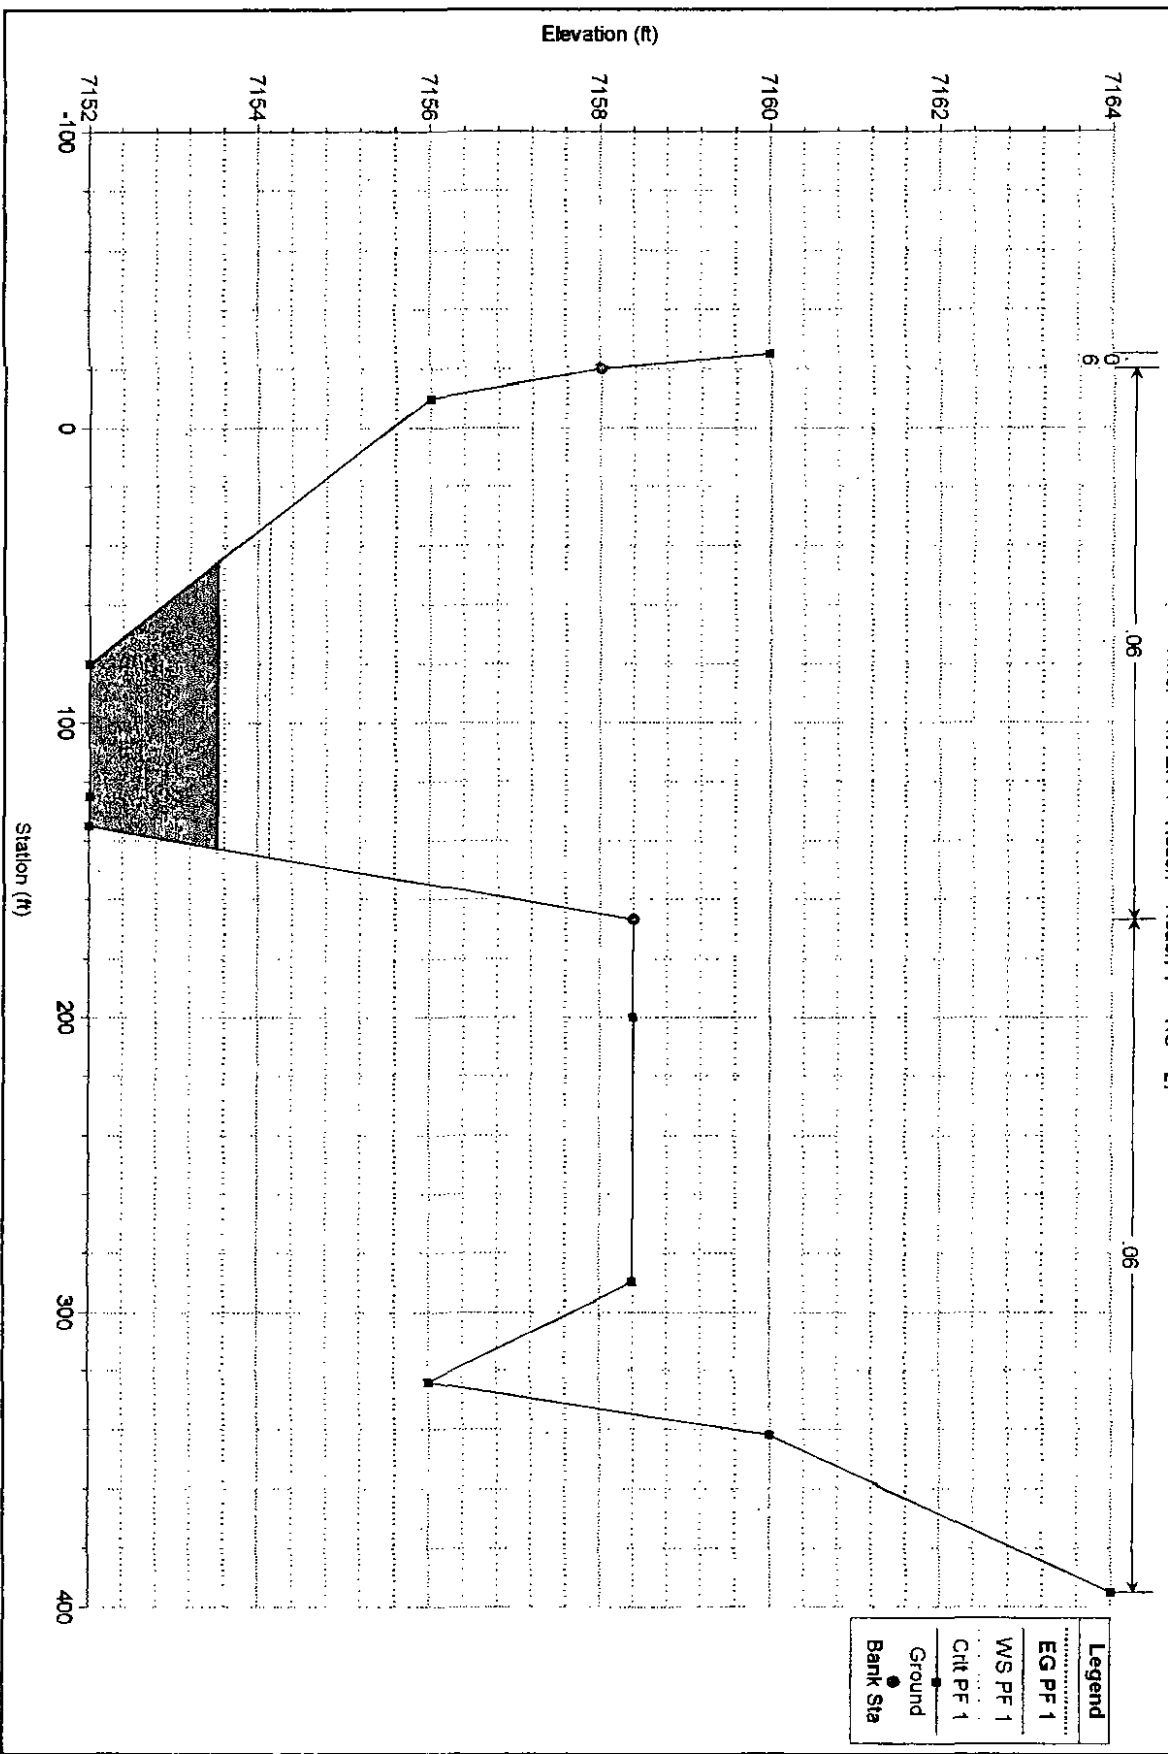


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 27.2

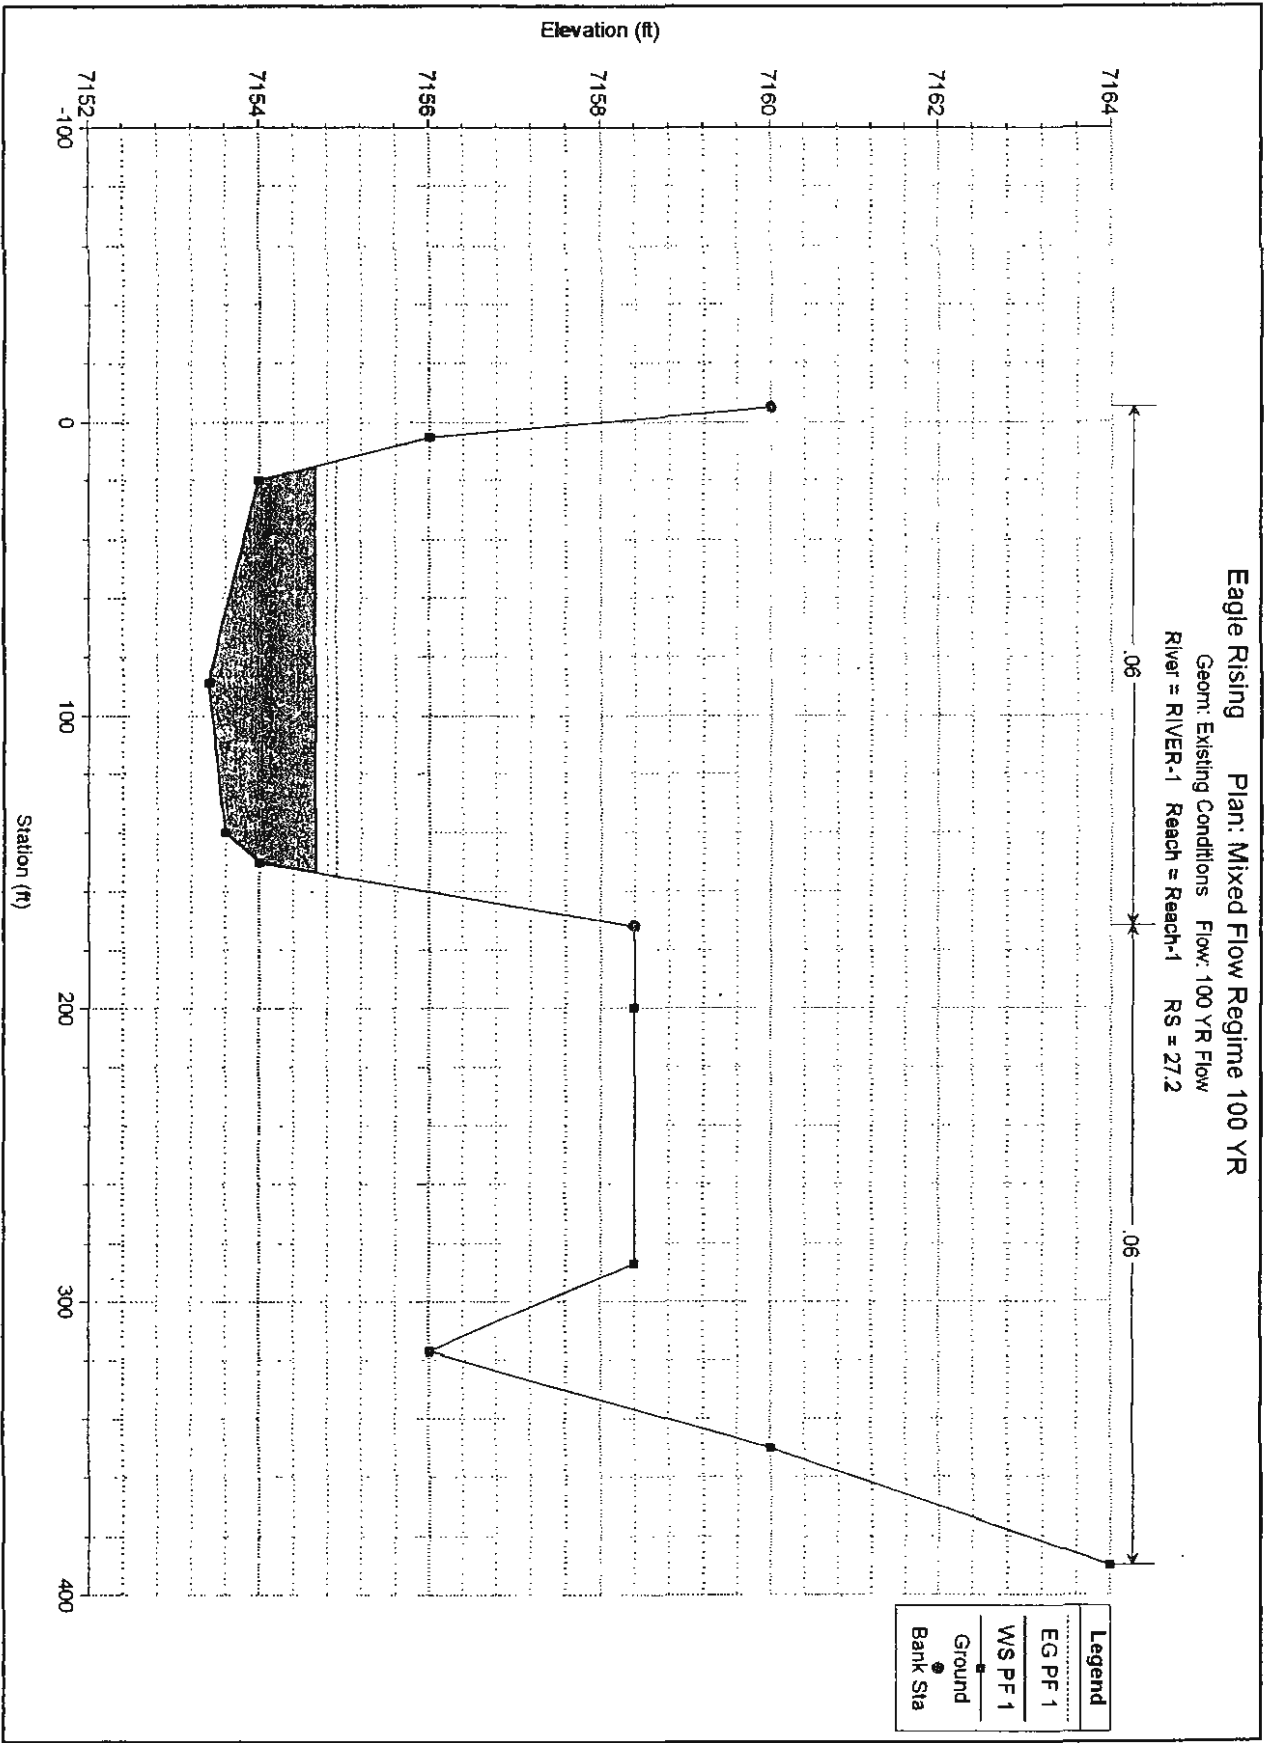


Eagle Rising Plan: Mixed Flow Regime 100 YR  
 Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 27.4

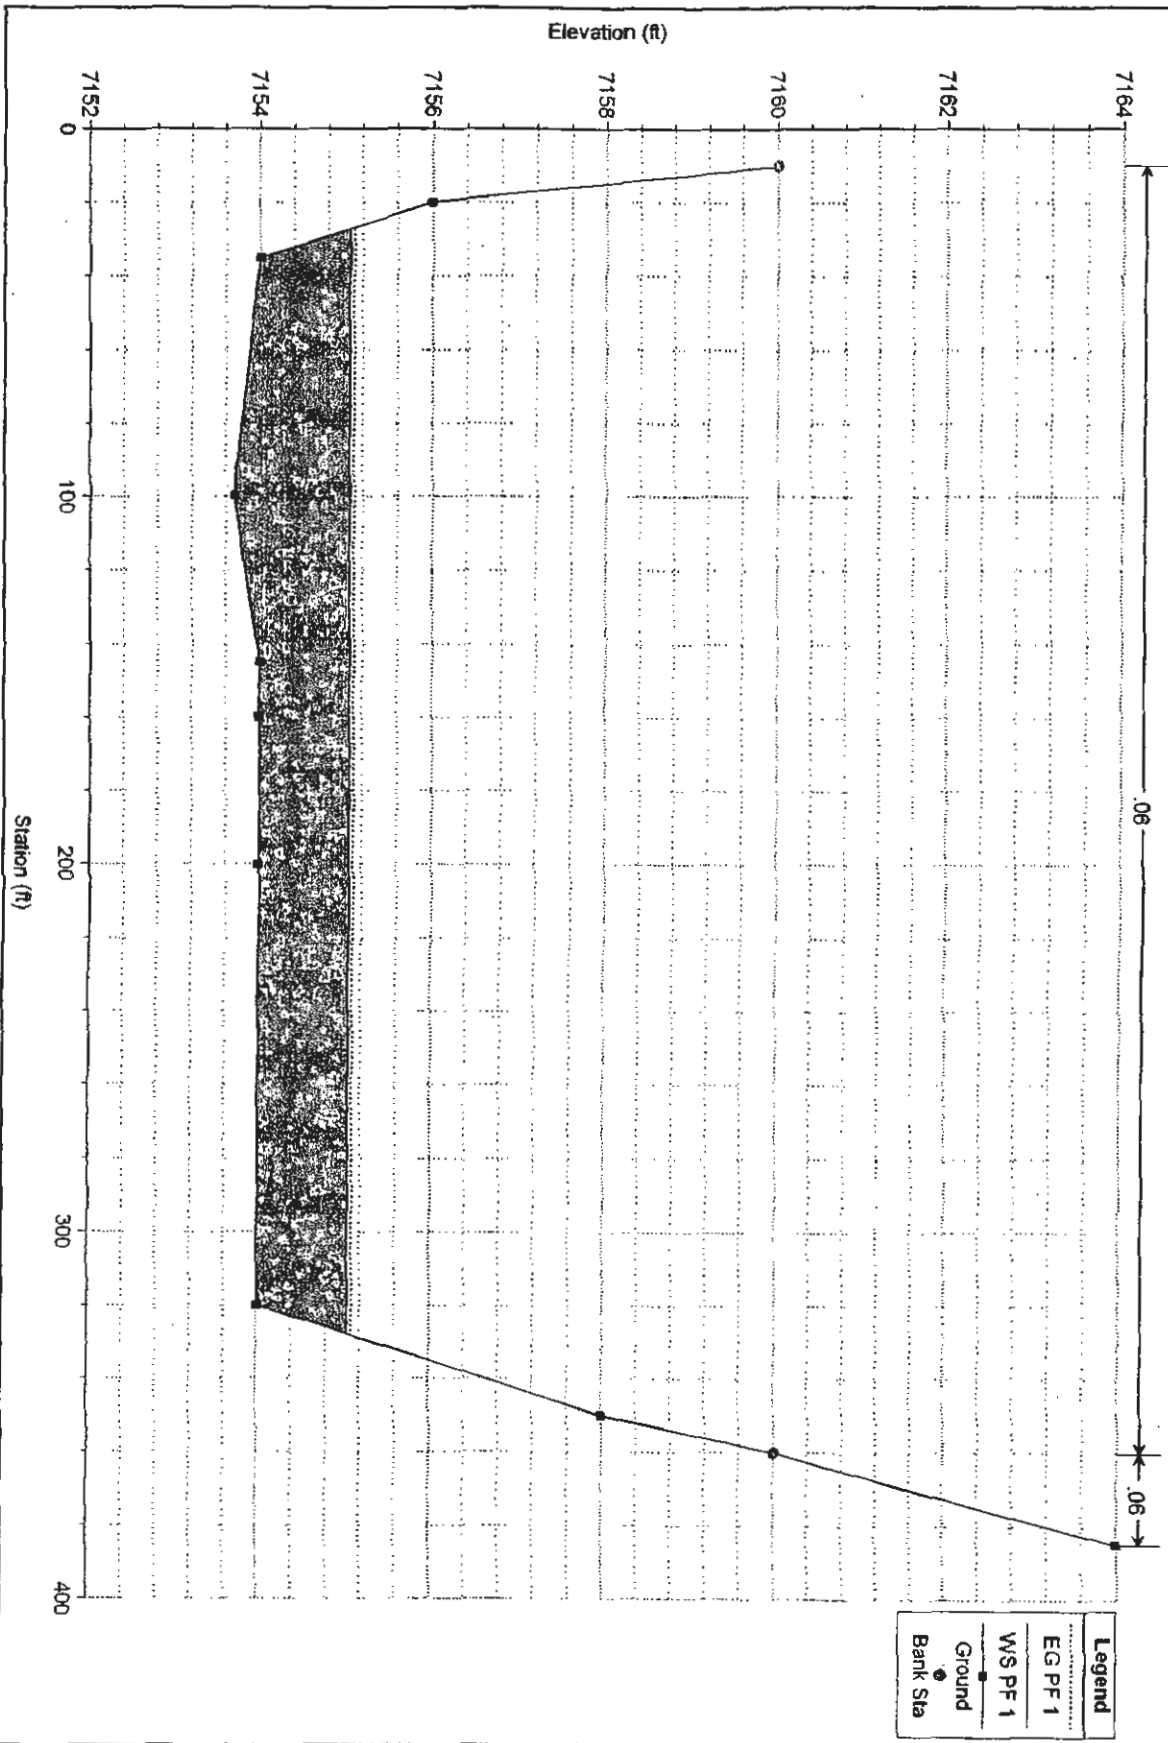

# Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 31

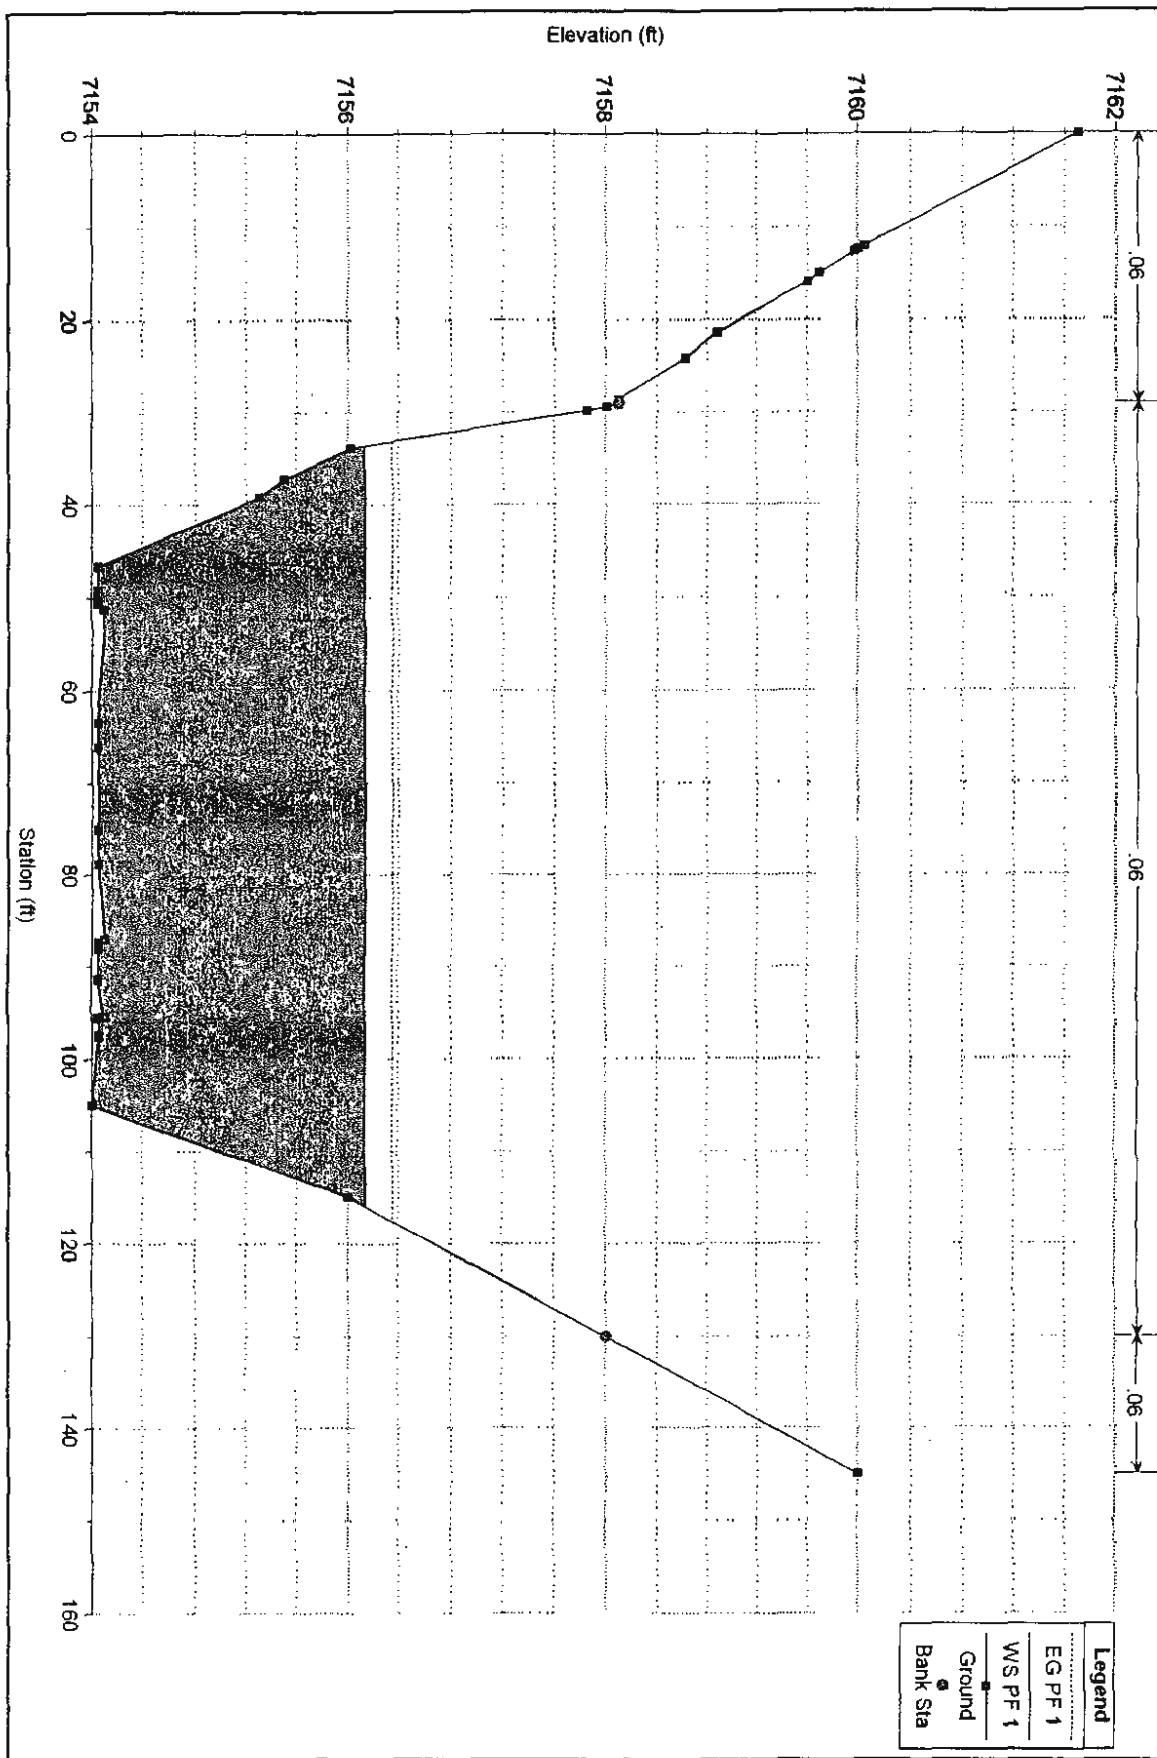



**Eagle Rising Plan: Mixed Flow Regime 100 YR**


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 32

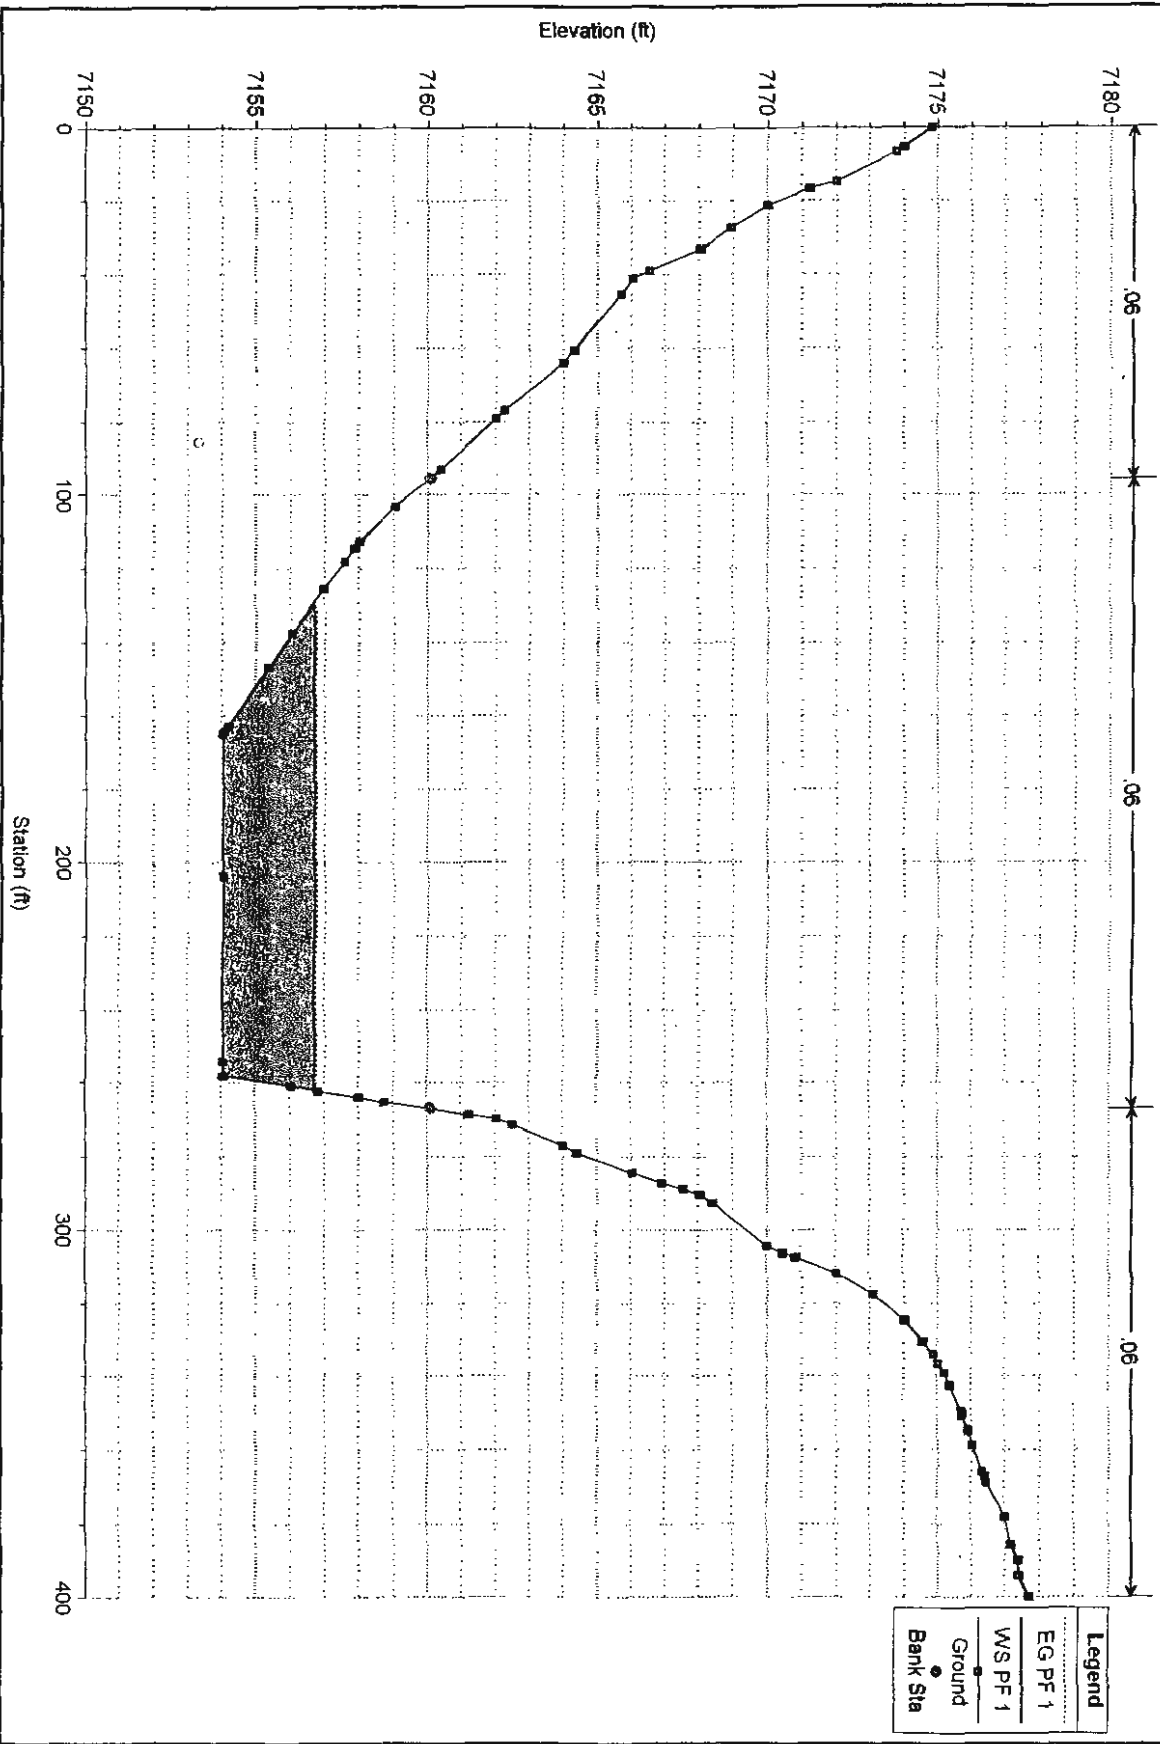

Legend	
EG PF 1	(dotted line with circles)
WS PF 1	(solid line with squares)
Ground	(dotted line with circles)
Bank Sta	(solid line with squares)


**Eagle Rising Plan: Mixed Flow Regime 100 YR**

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 34

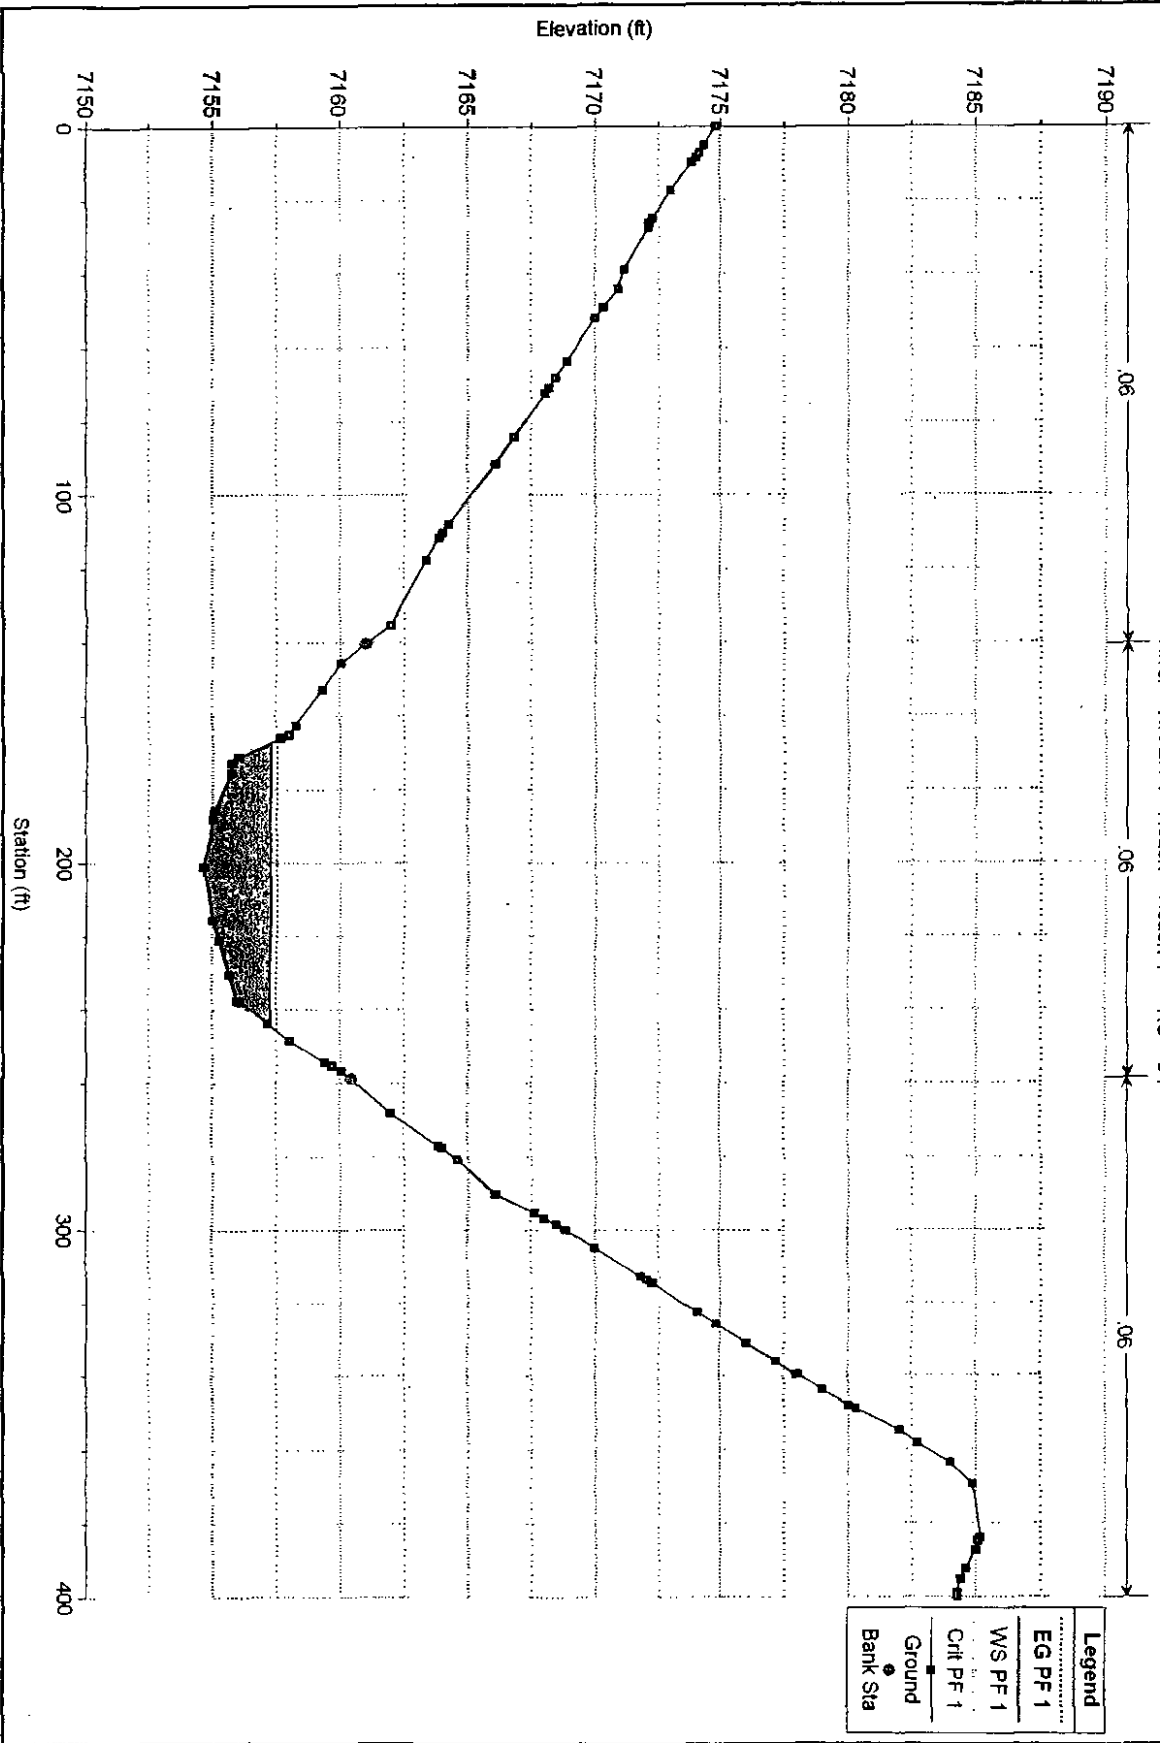


### Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 35

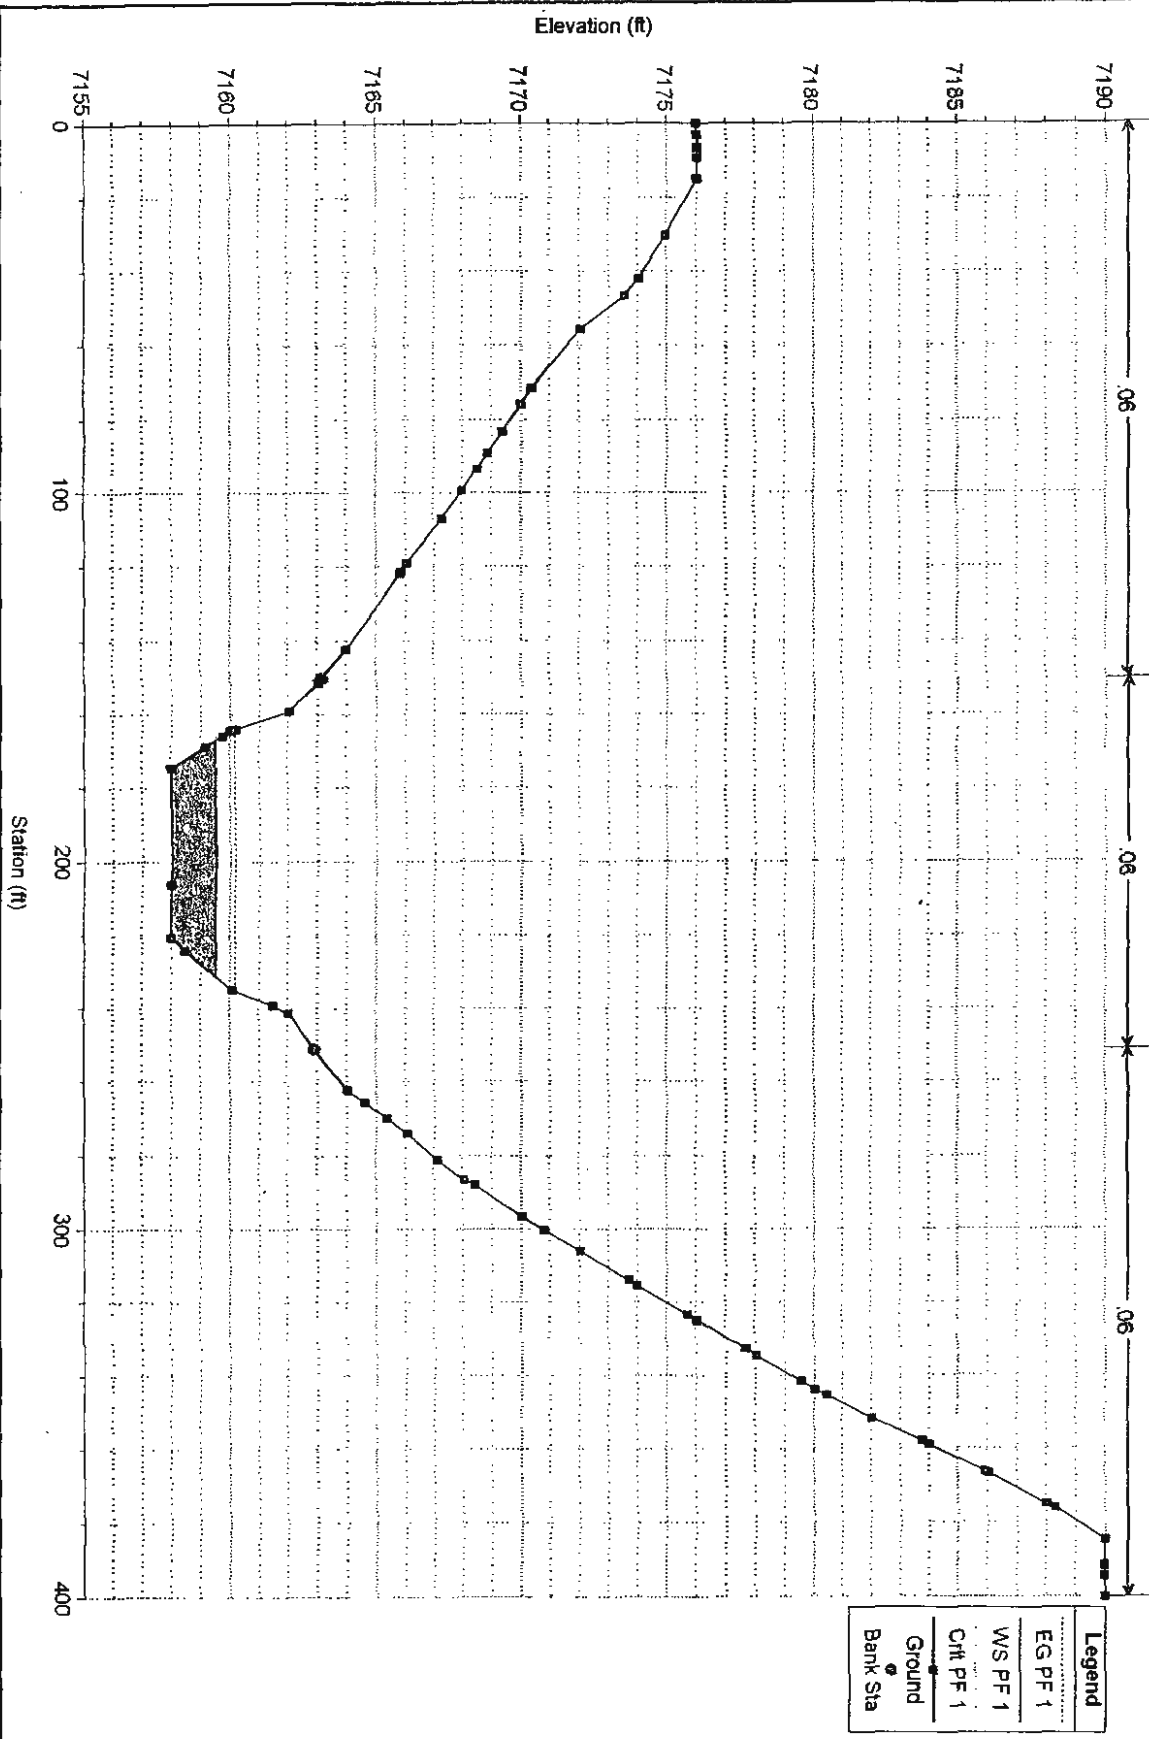

# Eagle Rising Plan: Mixed Flow Regime 100 YR


Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 36

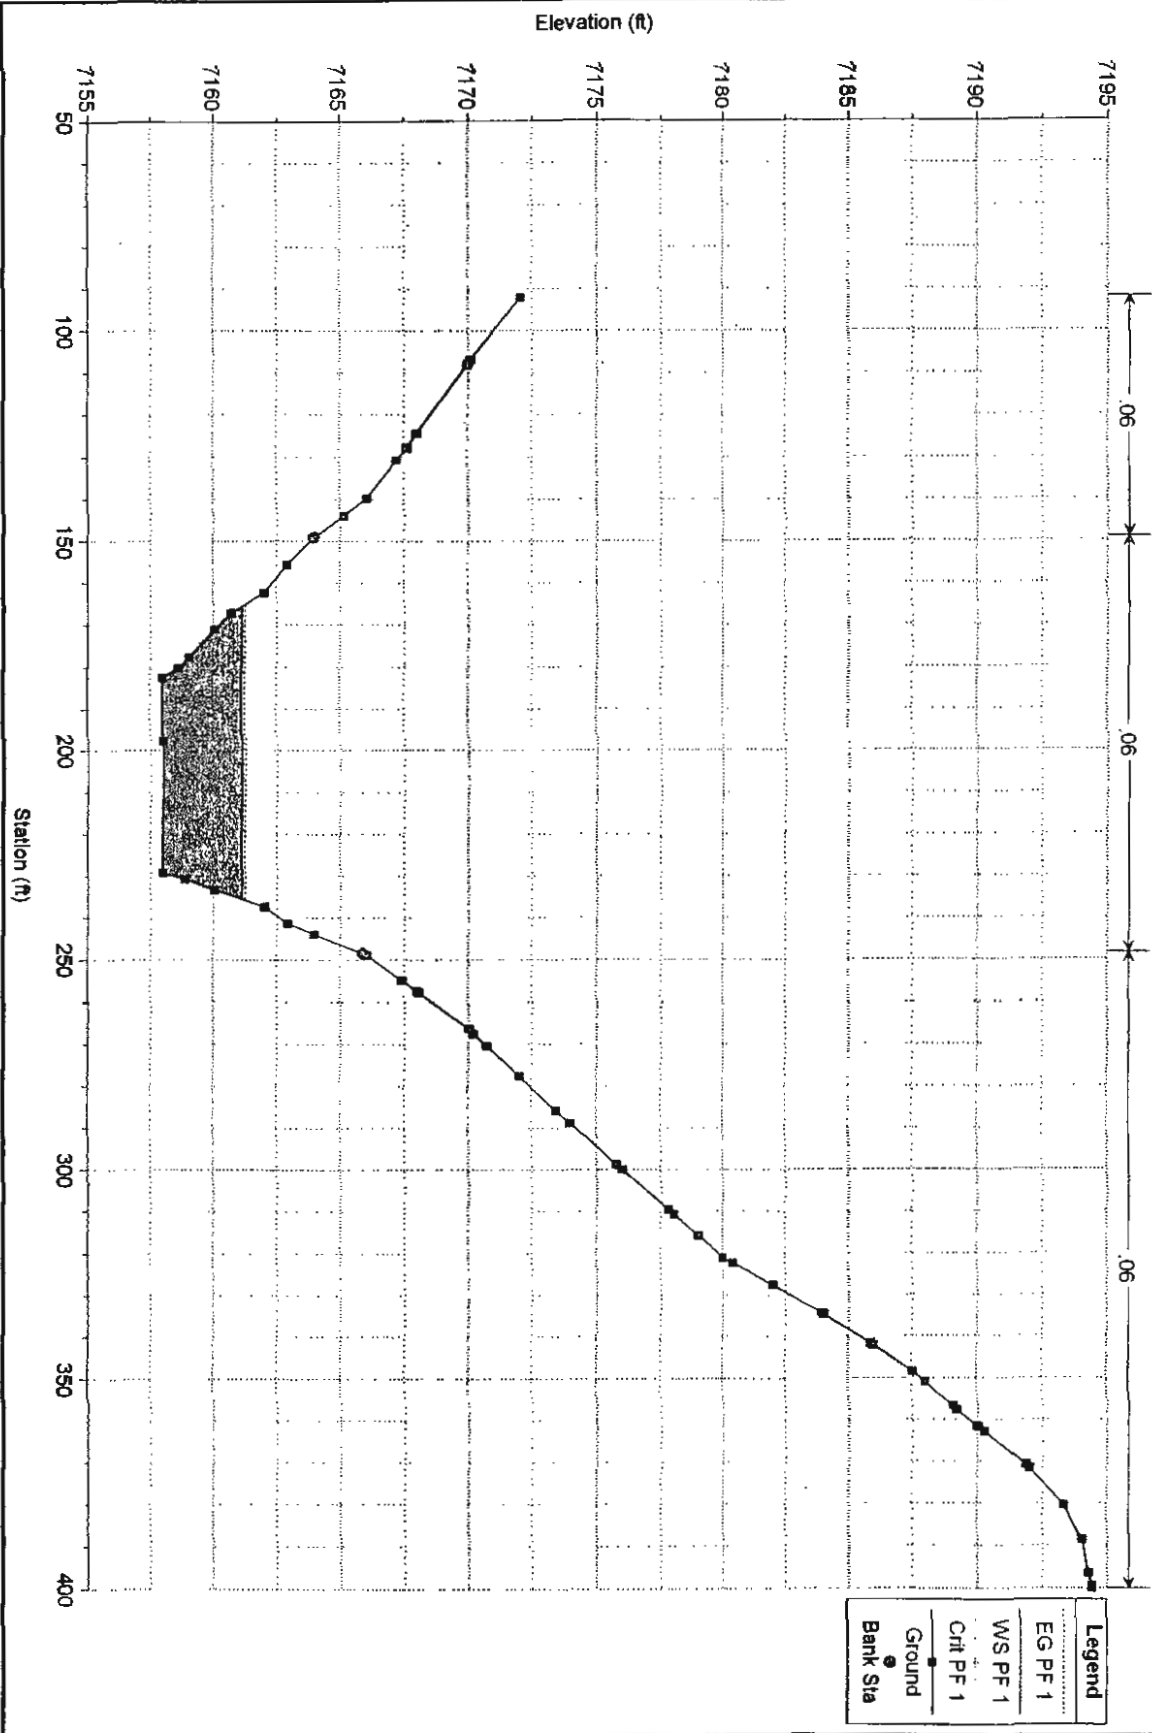

- Legend
- EG PF 1
- WS PF 1
- Crit PF 1
- Ground
- Bank Sta


# Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
River = RIVER-1 Reach = Reach-1 RS = 37

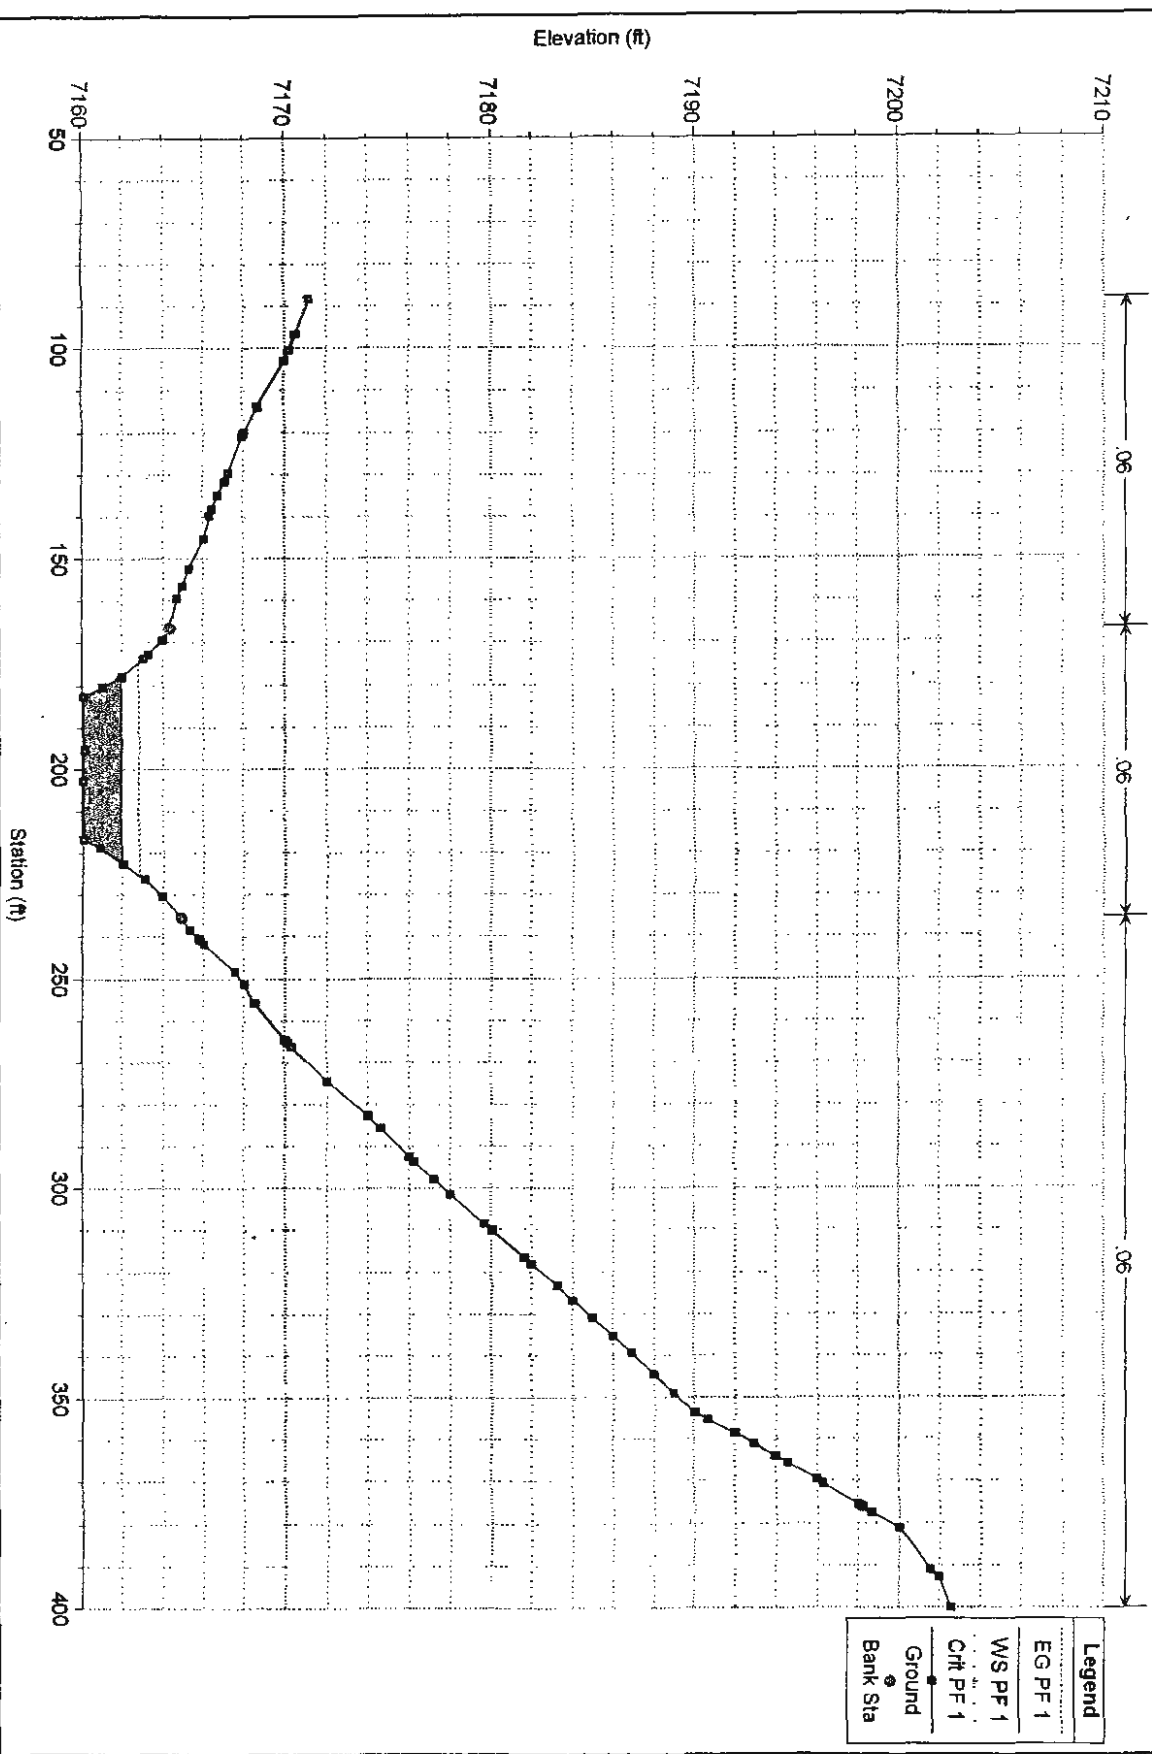

### Eagle Rising Plan: Mixed Flow Regime 100 YR

Geom: Existing Conditions Flow: 100 YR Flow  
 River = RIVER-1 Reach = Reach-1 RS = 38

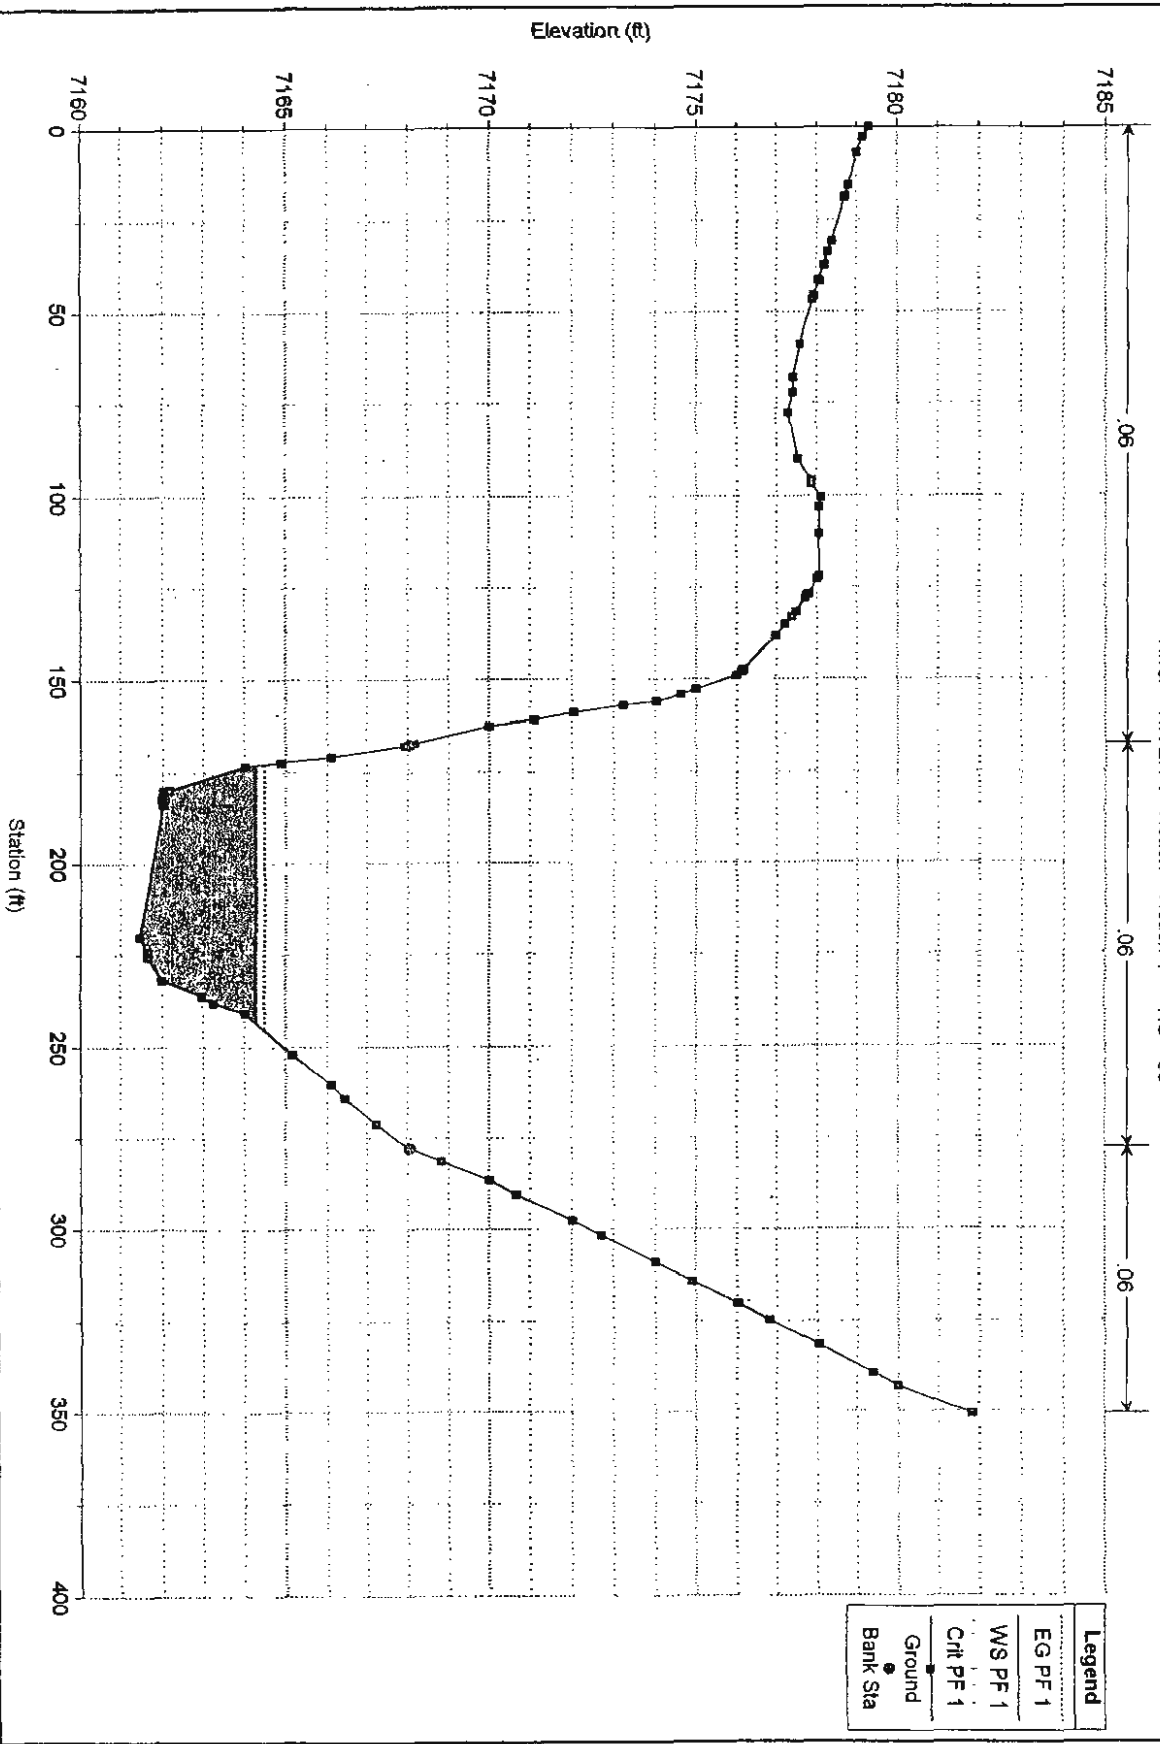

Legend	
EG PF 1	Ground
WS PF 1	Bank Sta
Crt PF 1	

**HECRAS MODEL DATA  
COMPLETE INPUT AND OUTPUT REPORT**

Excerpt from Eagle Rising, Filing No. 1  
Final Drainage Report  
August 2015  
Prepared by M&S Civil Consultants, Inc.

KurieRoad.rep

HEC-RAS Version 4.1.0 Jan 2010  
U.S. Army Corps of Engineers  
Hydrologic Engineering Center  
609 Second Street  
Davis, California

```
X      X  XXXXXX   XXXX      XXXX      XX      XXXX
X      X  X       X   X      X   X      X   X      X
X      X  X       X       X   X   X      X   X      X
XXXXXXXX XXXX     X       XXX XXXX     XXXXXX     XXXX
X      X  X       X       X   X   X      X   X      X
X      X  X       X       X   X   X      X   X      X
X      X  XXXXXX   XXXX     X   X      X   X      XXXXXX
```

PROJECT DATA

Project Title: Eagle Rising  
Project File : KurieRoad.prj  
Run Date and Time: 6/10/2012 12:51:52 PM

Project in English units

PLAN DATA

Plan Title: Mixed Flow Regime 100 YR  
Plan File : C:\Projects\Kurie Road\HECRAS\KurieRoad.p04

Geometry Title: Existing Conditions  
Geometry File : C:\Projects\Kurie Road\HECRAS\KurieRoad.g01

Flow Title : 100 YR Flow  
Flow File : C:\Projects\Kurie Road\HECRAS\KurieRoad.f02

Plan Summary Information:

Number of:	Cross Sections =	37	Multiple Openings =	0
	Culverts =	0	Inline Structures =	0
	Bridges =	0	Lateral Structures =	0

Computational Information

water surface calculation tolerance	=	0.01
critical depth calculation tolerance	=	0.01
Maximum number of iterations	=	20
Maximum difference tolerance	=	0.3
Flow tolerance factor	=	0.001

Computation Options

Critical depth computed only where necessary  
Conveyance Calculation Method: At breaks in n values only  
Friction Slope Method: Average Conveyance  
Computational Flow Regime: Mixed Flow

FLOW DATA

Flow Title: 100 YR Flow



KurieRoad.rep

Flow File : C:\Projects\Kurie Road\HECRAS\KurieRoad.f02

Flow Data (cfs)

River	Reach	RS	PF 1
RIVER-1	Reach-1	38	547
RIVER-1	Reach-1	27	724
RIVER-1	Reach-1	20	881
RIVER-1	Reach-1	17	890
RIVER-1	Reach-1	12	897
RIVER-1	Reach-1	10	898
RIVER-1	Reach-1	6	931
RIVER-1	Reach-1	1	953

Boundary Conditions

River Downstream	Reach	Profile	Upstream
RIVER-1 Critical	Reach-1	PF 1	Critical

GEOMETRY DATA

Geometry Title: Existing Conditions

Geometry File : C:\Projects\Kurie Road\HECRAS\KurieRoad.g01

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1                      RS: 38

INPUT

Description:

Station Elevation Data		num= 77							
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7179.3	2.8	7179.15	6.96	7179.01	15.52	7178.79	18.62	7178.71
18.83	7178.7	30.87	7178.39	33.64	7178.28	37.37	7178.19	41.56	7178.06
41.72	7178.1	45.64	7177.92	46.79	7177.9	58.79	7177.58	67.9	7177.41
72.02	7177.4	77.48	7177.3	89.79	7177.53	95.67	7177.87	96.76	7177.86
100.24	7178.1	103.14	7178.05	110.54	7178.05	121.99	7178.05	122.69	7178.01
126.85	7177.8	127.17	7177.74	127.92	7177.71	131.61	7177.47	133.11	7177.38
135.21	7177.2	138.27	7176.98	147.43	7176.18	147.94	7176.14	149.17	7176.02
152.89	7175	154.31	7174.64	156.04	7174.03	157.01	7173.23	158.94	7172.05
160.88	7171.1	162.55	7170.01	167.42	7168.16	167.78	7168.03	167.95	7167.93
170.8	7166.1	172.21	7164.89	173.28	7164.01	179.73	7162.17	180.1	7162.03
182.23	7162	183.75	7162.03	219.94	7161.45	224.01	7161.65	225.43	7161.65
231.9	7162	236.21	7162.97	237.96	7163.26	240.73	7164.01	252	7165.17
260.33	7166.1	264.11	7166.45	271.21	7167.23	277.96	7168.03	281.57	7168.82
286.59	7170	290.51	7170.67	297.83	7172.02	301.86	7172.71	308.96	7174.02
314.26	7174.9	320.09	7176.03	324.64	7176.82	331.52	7178.03	339.48	7179.39
343.15	7180	350.55	7181.82						

Manning's n Values                      num= 3  
Sta    n Val                      Sta    n Val                      Sta    n Val

KurieRoad.rep

0 .06 167.78 .06 277.96 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
167.78 277.96 97 100 110 .1 .3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 37

INPUT

Description:

Station Elevation Data		num= 78		Sta Elev		Sta Elev		Sta Elev	
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
88.31	7171.16	96.68	7170.48	100.62	7170.2	102.98	7170.01	113.83	7168.7
119.81	7168.03	120.33	7167.98	120.83	7167.94	129.43	7167.25	131.58	7167.1
135.02	7166.78	138.29	7166.5	139.83	7166.38	145.35	7166.05	152.53	7165.3
156.54	7164.99	159.48	7164.71	166.66	7164.34	169.43	7164.01	172.82	7163.3
173.69	7163.05	177.94	7162.03	180.25	7161.05	182.54	7160.05	195.24	7160.1
202.71	7160.05	216.58	7160.05	218.64	7160.84	222.4	7162.03	226.33	7163.1
230.31	7164.01	235.15	7164.85	235.61	7164.93	238.34	7165.36	240.33	7165.8
240.91	7165.87	241.7	7166.05	248.26	7167.57	251.08	7168.03	255.87	7168.5
264.65	7170.01	265.23	7170.13	266.26	7170.34	274.36	7172.02	282.69	7174
282.99	7174.02	285.71	7174.59	292.67	7176.03	293.66	7176.25	297.94	7177.2
301.53	7178.03	308.56	7179.67	310.08	7180.03	316.46	7181.63	318.11	7182
323.05	7183.22	326.6	7184.02	330.91	7184.97	335.4	7186.01	339.32	7186.9
344.48	7188.01	348.98	7188.98	353.68	7190	355.38	7190.62	358.68	7192
361.05	7192.94	364.1	7194.01	365.63	7194.6	369.71	7196.01	370.54	7196.3
375.5	7198.01	375.86	7198.13	376.13	7198.21	377.38	7198.65	381.05	7200
391.05	7201.59	392.75	7202	400	7202.59				

Manning's n Values		num= 3		Sta n Val	
Sta	n Val	Sta	n Val	Sta	n Val
88.31	.06	166.66	.06	235.61	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
166.66 235.61 68 100 126 .1 .3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 36

INPUT

Description:

Station Elevation Data		num= 65		Sta Elev		Sta Elev		Sta Elev	
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
91.95	7172.05	106.9	7170.1	107.73	7170	108.14	7169.95	124.51	7168.03
127.78	7167.66	130.79	7167.26	139.77	7166.1	144.01	7165.16	149.14	7164.01
155.47	7162.94	162.21	7162.03	167.16	7160.7	171.12	7160.05	177.76	7159.04
180.32	7158.62	182.51	7158.01	197.76	7158	229.2	7158.01	230.75	7158.85
233.4	7160.05	237.39	7162.02	237.41	7162	237.45	7162.04	241.35	7162.94
243.96	7164.01	248.57	7165.92	248.91	7166.1	255.01	7167.42	257.6	7168.03
257.81	7168.08	266.24	7170.01	267.45	7170.2	270.38	7170.74	277.64	7172.02
285.96	7173.45	289	7174.02	298.71	7175.8	299.98	7176.03	309.66	7177.84
310.67	7178.03	315.83	7179.02	321.19	7180	322.34	7180.42	327.59	7182.03
334.38	7183.94	334.68	7184.02	341.62	7185.9	342.15	7186.01	348.58	7187.54
350.91	7188.01	356.68	7189.04	357.68	7189.2	361.49	7190	361.71	7190.05
362.93	7190.29	370.68	7191.88	371.46	7192	380.39	7193.34	388.45	7194.02
388.67	7194.03	388.69	7194.03	396.32	7194.3	399.39	7194.43	400	7194.42

KurieRoad.rep

Manning's n Values num= 3  
 Sta n Val Sta n Val Sta n Val  
 91.95 .06 149.14 .06 248.57 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 149.14 248.57 97 100 102 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 35

INPUT

Description:

Station	Elevation	Data	num=	70	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7176	3.08	7176.02	6.49	7176.02	9.02	7176.02	14.77	7176.02			
14.94	7176	30.15	7174.97	42.02	7174.03	46.49	7173.54	55.7	7172.05			
71.43	7170.4	75.88	7170.01	83.13	7169.39	89.17	7168.85	93.41	7168.49			
99.43	7168	106.93	7167.28	119.29	7166.05	121.42	7165.88	122.1	7165.82			
142.25	7164	150.45	7163.14	151.59	7163	159.07	7162.03	164	7160.19			
164.08	7160.2	164.17	7160.12	164.33	7160.05	164.53	7160.01	165.92	7159.76			
168.65	7159.2	174.48	7158.01	206.18	7158.01	220.53	7158.01	224.08	7158.43			
234.9	7160.1	239.12	7161.48	241.31	7162.03	251.23	7162.89	262.23	7164.01			
265.42	7164.6	269.98	7165.35	273.89	7166.05	281.15	7167.14	286.52	7168.03			
288	7168.4	296.69	7170.01	300.48	7170.8	305.99	7172.02	314.13	7173.72			
315.57	7174	323.51	7175.72	325	7176.03	332.62	7177.65	334.45	7178.03			
341.73	7179.6	343.91	7180.03	345.46	7180.46	351.65	7182.03	358.05	7183.75			
359.04	7184	366.3	7185.94	366.56	7186.01	366.78	7186.07	375.19	7188.01			
376.19	7188.3	384.81	7190	391.59	7190	394.35	7190	400	7190			

Manning's n Values num= 3  
 Sta n Val Sta n Val Sta n Val  
 0 .06 150.45 .06 251.23 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 150.45 251.23 90 100 110 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 34

INPUT

Description:

Station	Elevation	Data	num=	82	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7174.8	5.1	7174.35	7.21	7174.15	8.33	7174.03	9.85	7173.85			
17.12	7173	24.9	7172.26	26.16	7172.13	26.17	7172.13	26.55	7172.11			
27.26	7172.1	38.72	7171.18	43.93	7170.91	49.04	7170.35	51.91	7170.01			
63.47	7168.9	68.14	7168.45	70.89	7168.2	72.3	7168.03	84.09	7166.83			
91.41	7166.1	107.94	7164.25	110.23	7164.01	111.72	7163.89	117.88	7163.41			
135.46	7162	140.52	7161.01	145.65	7160.05	152.82	7159.36	162.58	7158.27			
165.04	7158	165.96	7157.65	171.08	7156.03	172.68	7155.78	175.17	7155.75			
185.62	7155.1	187.94	7155.04	201.04	7154.67	215.73	7155	221.06	7155.26			
230.59	7155.7	237.52	7156.03	237.83	7156.1	243.86	7157.17	248.55	7158.01			
254.29	7159.4	255.24	7159.69	256.58	7160.05	258.72	7160.45	268.27	7162.03			
277.08	7163.9	277.62	7164.01	280.8	7164.59	290.29	7166.05	295.39	7167.63			
296.89	7168	298.53	7168.51	299.85	7168.84	299.95	7168.86	304.87	7170.01			
312.58	7171.8	313.58	7172.02	314.45	7172.22	322.38	7174.02	325.8	7174.83			
331	7176	335.87	7177.18	339.53	7178.03	343.72	7178.99	348.01	7180.03			

KurieRoad.rep

348.72	7180.3	354.64	7182.02	358.18	7182.7	363.6	7184	369.37	7184.94
383.9	7185.2	384.81	7185.12	387.48	7185	392.32	7184.62	395.03	7184.44
399	7184.3	400	7184.28						

Manning's n Values num= 3  
 Sta n Val Sta n Val Sta n Val  
 0 .06 140.52 .06 258.72 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 140.52 258.72 103 100 103 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 33

INPUT

Description:

Station	Elevation	Data	num=	67							
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7175.2	1.7	7175.01	14.63	7173.8	16.38	7173.42	23.79	7172		
25.2	7171.7	33.21	7170.01	42.78	7168.78	48.71	7168.03	56.46	7166.62		
60.43	7166.1	84.2	7164.18	86.34	7164.01	86.93	7163.95	104.65	7162.03		
105.9	7161.8	114.96	7160.05	116.55	7159.88	126.02	7158.89	133.61	7158.01		
158.35	7156.1	158.65	7156.03	159.45	7155.84	167.43	7154.05	183.05	7154.05		
240.65	7154.1	241.18	7154.51	242.72	7156.03	247.18	7157.65	247.88	7158.01		
249.96	7158.7	253.97	7160.05	257.49	7161.33	259.27	7162.03	261.5	7162.52		
263.23	7162.9	268.9	7164.01	273.75	7164.87	279.42	7166.05	283.83	7167.11		
288	7168	290.7	7169.27	292.52	7170.01	296.21	7170.91	300.72	7172.02		
305.85	7173.3	308.98	7174.02	314.11	7175.23	317.42	7176.03	323.16	7177.37		
326.36	7178	335.18	7179.87	336.05	7180.03	343.86	7181.84	344.44	7182.02		
353.03	7183.5	354.73	7183.78	356.11	7184	357.3	7184	364.34	7184		
374.83	7182.8	382.5	7182.02	387.01	7180.92	389.02	7180.46	391.1	7180.03		
398.23	7179.5	400	7179.4								

Manning's n Values num= 3  
 Sta n Val Sta n Val Sta n Val  
 0 .06 105.9 .06 257.49 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 105.9 257.49 98 100 102 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 32

INPUT

Description:

Station	Elevation	Data	num=	72							
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7174.8	5.49	7174.03	6.7	7173.81	14.73	7172.05	16.62	7171.25		
21.15	7170	27.29	7168.92	32.94	7168.03	38.86	7166.54	40.94	7166.05		
45.23	7165.7	60.56	7164.32	64.15	7164.01	76.9	7162.27	79.04	7162.03		
92.98	7160.4	95.51	7160.05	103.18	7159.04	112.55	7158.01	114.52	7157.88		
118.13	7157.6	125.57	7156.99	137.48	7156.03	146.79	7155.36	162.89	7154.21		
164.5	7154.1	165.13	7154.05	203.71	7154.05	254.2	7154.05	258.13	7154.05		
258.27	7154.1	260.86	7156.03	262.41	7156.82	264.06	7158.01	265.45	7158.75		
267.16	7160.1	268.87	7161.21	269.98	7162.03	271.54	7162.52	276.95	7164.01		
278.96	7164.4	284.52	7166.05	287.22	7166.94	288.91	7167.57	290.48	7168.03		
292.7	7168.4	304.45	7170.01	306.21	7170.47	307.4	7170.85	311.83	7172.05		

KurieRoad.rep									
317.42	7173.1	324.58	7174.03	324.7	7174.04	330.65	7174.58	334.22	7174.86
336.75	7175	339.25	7175.2	342.56	7175.36	349.38	7175.71	350.09	7175.73
350.69	7175.7	354.52	7175.9	354.98	7175.92	358.81	7176.02	365.96	7176.32
367.18	7176.4	368.98	7176.47	378.09	7177.04	385.81	7177.16	389.95	7177.38
394.22	7177.4	400	7177.7						

Manning's n values					
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	95.51	.06	267.16	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	95.51	267.16		121	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 31

INPUT

Description:

Station Elevation Data num= 39									
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7161.7	12.13	7160.05	12.45	7160	12.61	7159.98	12.76	7159.97
14.96	7159.7	15.94	7159.61	21.45	7158.88	24.15	7158.62	28.56	7158.11
29.02	7158.1	29.36	7158.01	29.77	7157.85	33.79	7156.03	37.18	7155.5
39.22	7155.3	46.66	7154.05	49.21	7154.05	50.03	7154.05	50.53	7154.05
51.18	7154.1	63.44	7154.05	66.07	7154.05	75.09	7154.05	78.75	7154.05
87	7154.1	87.22	7154.05	88.03	7154.05	91.34	7154.05	91.47	7154.05
95.35	7154.1	95.45	7154.05	95.54	7154.05	97.38	7154.05	97.54	7154.05
105	7154	115	7156	130	7158	145	7160		

Manning's n values					
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	29.02	.06	130	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	29.02	130		166	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 30

INPUT

Description:

Station Elevation Data num= 54									
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7163.1	11.88	7162.2	14.04	7162.03	14.38	7161.99	26.14	7160.62
30.61	7160.1	56.61	7158.42	61.3	7158.14	63.39	7158.01	76.21	7156.88
83.48	7156.4	86.25	7156.25	86.69	7156.26	90.65	7156.03	94.02	7155.83
96.29	7155.6	103.66	7155.19	106.08	7154.86	111.54	7154.05	114.23	7154.05
115.5	7154.1	123.7	7154.05	127.6	7154.05	128.58	7154.05	256.84	7154.05
277.64	7154.1	286.08	7154.05	286.39	7154.05	286.58	7154.05	291.05	7155.66
291.94	7156	296.24	7156.69	298.66	7157.03	304.99	7158.01	309.1	7158.67
310.99	7159	317.46	7160.05	333.82	7161.17	337.2	7161.48	344.41	7162.03
350.4	7163.6	351.93	7164.01	353.34	7164.19	367.01	7166.05	369.05	7166.44
370.17	7166.6	372.88	7167.07	377.49	7167.65	378.36	7167.77	378.6	7167.81
380.93	7168	388.47	7168.28	389.23	7168.29	400	7168.56		

Manning's n values					
Sta	n Val	Sta	n Val	Sta	n Val

0 .06 56.61 .06 317.46 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 56.61 317.46 158 100 50 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 29

INPUT

Description:

Station Elevation Data		num= 51		Sta Elev		Sta Elev		Sta Elev	
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7170	.22	7170.01	1.34	7170.01	6.66	7169.64	22.95	7168.03
25.71	7167.4	33.13	7166.05	46.5	7164.59	51.88	7164.01	55.01	7163.41
58.41	7162.7	62.5	7162.03	64.85	7161.08	67.51	7160.05	68.99	7159.23
70.93	7158	73.87	7157.58	77.39	7157.1	84.5	7156.03	85.14	7156.03
92.72	7154.9	97.27	7154.05	97.47	7154.05	99.98	7154.05	100.01	7154.05
100.84	7154.1	101.29	7154.05	129.95	7154.05	139.86	7154.05	178.55	7154.05
255.12	7154.1	308.04	7154.05	312.4	7155.03	316.71	7156.03	322.33	7157.64
324.07	7158	326.54	7158.43	337.32	7160.05	345.12	7161.56	347.18	7162.03
347.22	7162	361.69	7163.92	362.35	7164.01	363.84	7164.2	377.86	7166.05
378.88	7166.2	383.05	7166.55	386.14	7166.81	396.33	7167.74	397.14	7167.8
400	7168								

Manning's n Values num= 3  
 Sta n Val Sta n Val Sta n Val  
 0 .06 77.39 .06 322.33 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 77.39 322.33 162 160 116 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 27.4

INPUT

Description:

Station Elevation Data		num= 11		Sta Elev		Sta Elev		Sta Elev	
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
10	7160	20	7156	35	7154	100	7153.7	145	7154
160	7154	200	7154	320	7154	350	7158	360	7160
385	7164								

Manning's n Values num= 3  
 Sta n Val Sta n Val Sta n Val  
 10 .06 10 .06 360 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 10 360 20 20 20 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 27.2

INPUT

Description:

KurieRoad.rep

Station Elevation Data num= 12

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
-5	7160	5	7156	20	7154	89	7153.4	140	7153.6
150	7154	172	7158.4	200	7158.4	287	7158.4	317	7156
350	7160	390	7164						

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
-5	.06	-5	.06	172	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

-5	172	20	20	20	.1	.3
----	-----	----	----	----	----	----

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 27

INPUT

Description:

Station Elevation Data num= 12

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
-25	7160	-20	7158	-10	7156	80	7152	125	7152
135	7152	167	7158.4	200	7158.4	290	7158.4	324	7156
342	7160	395	7164						

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
-25	.06	-20	.06	167	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

-20	167	35	35	35	.1	.3
-----	-----	----	----	----	----	----

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 26.65

INPUT

Description:

Station Elevation Data num= 14

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
-55	7160	-24	7156	65	7152	100	7150	145	7150
188	7150	215	7148	232	7146	275	7144	294	7148
309	7156	327	7158	373	7160	400	7162		

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
-55	.06	188	.06	309	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

188	309	74	215	273	.1	.3
-----	-----	----	-----	-----	----	----

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 24.5

INPUT

Description:

KurieRoad.rep

Station Elevation Data				num=	11		Sta	Elev	Sta	Elev
Sta	Elev	Sta	Elev		Sta	Elev	Sta	Elev	Sta	Elev
-96	7160	-5	7150		75	7146	97	7144	105	7142
135	7140	190	7138		200	7137	210	7138	230	7140
257	7152									

Manning's n Values				num=	3		Sta	n Val	Sta	n Val
Sta	n Val	Sta	n Val		Sta	n Val	Sta	n Val	Sta	n Val
-96	.06	-5	.06		257	.06				

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	-5	257		163	250		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 22

INPUT

Description:

Station Elevation Data				num=	90		Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
Sta	Elev	Sta	Elev		Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7160	1.95	7160.05		16.55	7158.49	18.09	7158.39	21.62	7158.01				
27.28	7157.6	33.74	7157.06		39.86	7156.54	42.02	7156.38	43.14	7156.3				
46.29	7156	49.68	7155.74		54.28	7155.39	65.59	7154.05	66.42	7153.48				
68.22	7152	72.44	7152.01		77.5	7152.01	83.48	7152.01	87.74	7152.01				
90.62	7150.9	92.94	7150.03		104.27	7148.72	110.17	7148.05	113.86	7146.79				
116.15	7146	118.81	7145.66		130.45	7144.03	137.13	7143.08	143.14	7142.05				
148.48	7141.2	155.82	7140.01		163.99	7138.14	164.68	7138.03	165.61	7137.73				
169.95	7136	171.88	7135.24		173.3	7134.4	174.13	7134.01	181.52	7134.01				
187.39	7134	195.38	7134.01		198.47	7134.01	200.2	7134.01	207.03	7134.01				
207.07	7134	207.24	7134.01		208.88	7134.01	209.07	7134.01	209.26	7134.01				
209.47	7134	209.7	7134.01		222.26	7134.01	227.52	7134.01	235.34	7134.01				
236.43	7134	255.05	7135.3		262.01	7136.04	264.49	7136.39	276.64	7138.03				
277.78	7138.3	287.29	7140.01		288.76	7140.17	292.22	7140.51	294.63	7140.56				
297.52	7140.8	300.83	7140.83		303.29	7141.02	307.13	7141.25	318.69	7141.49				
324.57	7141.5	326.65	7141.49		334.99	7141.67	343.91	7142.05	344.99	7142.09				
352.22	7142.2	353.02	7142.24		365.82	7142.24	367.25	7142.26	379.94	7142.23				
380.11	7142.2	380.47	7142.24		380.84	7142.25	381.72	7142.28	385.1	7142.24				
388.81	7142.3	390.56	7142.34		391.98	7142.4	399.61	7142.68	400	7142.7				

Manning's n Values				num=	3		Sta	n Val	Sta	n Val
Sta	n Val	Sta	n Val		Sta	n Val	Sta	n Val	Sta	n Val
0	.06	155.82	.06		287.29	.06				

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	155.82	287.29		117	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 21

INPUT

Description:

Station Elevation Data				num=	64		Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
Sta	Elev	Sta	Elev		Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
37.39	7158.4	44.96	7158.01		46.49	7158.01	54.39	7158.01	54.55	7158.01				
55.13	7158	55.68	7158.01		57.27	7158.01	63.28	7157.42	77.32	7156.03				
84.74	7154.1	84.82	7154.05		98.89	7152.32	101.37	7152.01	105.02	7151.17				
110.39	7150	112.63	7149.57		120.54	7148.05	133.71	7146.29	135.85	7146.01				



KurieRoad.rep

144.84	7144.4	147.06	7144.03	149.14	7143.6	157.03	7142.05	162.64	7140.23
163.18	7140	165.24	7138.95	166.78	7138.03	167.22	7137.89	168.94	7137.25
170.7	7136	174.06	7134.54	175.25	7134.01	179.76	7132.72	181.77	7132.03
190.62	7132	196.34	7132.03	214.31	7132.03	216.77	7132.19	244.07	7134.01
247.45	7135.4	249.03	7136.04	253.92	7136.53	261.3	7137.08	266.69	7137.52
268.78	7137.7	269.89	7137.76	271.14	7137.84	275.48	7138.03	278.67	7138.18
286.62	7138.5	288.9	7138.6	298.61	7138.93	298.83	7138.93	300.71	7138.94
301.78	7139	303.73	7138.98	305.73	7139.06	310.16	7139.11	312.85	7139.19
316.02	7139.3	320.08	7139.49	321.54	7139.55	326.28	7139.79		

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
37.39	.06	166.78	.06	253.92	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	166.78	253.92		130	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 20

INPUT

Description:

Station Elevation Data		num=		78					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
47.08	7154.1	47.27	7154.05	47.28	7154.05	47.37	7154.05	47.44	7154.05
47.72	7154.1	48.27	7154.05	48.44	7153.8	49.78	7152.01	57.89	7150.9
63.72	7150	66.5	7149.24	70.33	7148.05	76.08	7147	82.14	7146.01
88.91	7144.3	89.93	7144.03	96.01	7142.27	96.81	7142.05	97.17	7141.85
100.08	7141.1	104.64	7140.01	109.92	7138.67	112.57	7138.03	114.04	7137.26
116.23	7136	119.76	7134.15	119.9	7134.01	120.49	7134.01	120.98	7134.01
131.02	7134	134.13	7134.01	145.83	7133.31	147.97	7133.44	148.41	7133.41
154.17	7133.7	154.83	7133.64	156.56	7133.58	162.62	7133.53	162.65	7133.53
165.28	7133.3	169.61	7132.56	171.72	7132.28	172.68	7132.03	176.78	7131.69
184.25	7131	187.86	7131.02	216.55	7131.29	220.12	7131.33	226.42	7132.03
226.47	7132	226.53	7132.04	236.06	7134.01	237.16	7134.01	237.28	7134.01
237.85	7134	241.3	7134.01	243.78	7134.01	262.01	7134.84	263.87	7134.94
273.72	7135.4	276.95	7135.52	284.32	7136.04	291.65	7136.81	296.83	7137.39
301.97	7138	313.32	7138.74	332.8	7140.01	349.13	7140.85	358.76	7141.32
361.32	7141.4	367.02	7141.63	375.81	7142.05	388.15	7142.61	389.36	7142.67
392.68	7142.9	398.74	7143.21	400	7143.28				

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
47.08	.06	116.23	.06	276.95	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	116.23	276.95		102	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 19

INPUT

Description:

Station Elevation Data		num=		62					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
7.63	7156.6	8.46	7156.52	11.15	7156.1	11.68	7156.03	16.87	7155.21
24.06	7154.1	31.53	7153.14	39.14	7152.23	41.15	7152.01	54.4	7150.51

KurieRoad.rep

58	7150	72.11	7148.58	77.2	7148.05	79.1	7147.85	94.77	7146.01
106.94	7144.7	113.17	7144.03	127.07	7142.2	128.24	7142.05	128.39	7142.01
135.94	7140	138.99	7138.59	139.6	7138.37	139.96	7138.03	140.55	7137.74
143.66	7136	144.76	7134.95	146.85	7134.01	153.46	7133.21	162.44	7132.03
165.39	7130.3	165.81	7130.04	170.26	7130.04	205.36	7130.04	205.52	7130.04
218.28	7130	223.31	7130.04	230.08	7130.04	233.45	7129.85	241.14	7129.97
242.17	7130	242.39	7130.04	243.61	7130.04	250.35	7130.42	251.49	7130.57
260.59	7132	266.66	7133.24	271	7134.01	279.12	7134.98	288.09	7136.04
306.39	7137.6	312.49	7138.03	326.72	7139.46	329.4	7139.73	331.9	7140.01
338.07	7140.6	345.72	7141.37	352.76	7142.05	360.25	7142.33	373.63	7142.72
399.49	7143.5	400	7143.54						

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
7.63	.06	153.46	.06	271	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

153.46	271	104	100	92	.1	.3
--------	-----	-----	-----	----	----	----

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 18

INPUT

Description:

Station Elevation Data num= 71

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7156.7	20.67	7155.97	22.02	7156.17	22.28	7156.04	22.31	7156.03
25.44	7155.6	35.02	7154.26	36.74	7154.05	40.54	7153.57	53.39	7152.01
68.34	7150.2	69.62	7150.03	72.11	7149.72	85.49	7148.05	90.54	7146.92
94.79	7146	105.96	7144.63	110.51	7144.03	113.49	7143.59	120.05	7142.75
125.39	7142.1	133.11	7140.17	133.63	7140.01	133.85	7139.92	138.13	7138.03
141.41	7136.9	144.27	7136.04	148.34	7135.09	151.54	7134.01	155.09	7132.41
155.78	7132	163.19	7130.11	163.42	7130.05	163.44	7130.04	163.83	7129.97
175.47	7128	180.28	7128.01	195.55	7128.01	198.02	7128.01	212.51	7128.01
239.47	7128	242.56	7128.01	243.16	7128.11	253.71	7130.04	257.04	7130.7
263.37	7132	263.81	7132.08	283.32	7134.01	289.69	7134.68	302.98	7135.91
303.72	7136	304.29	7136.04	314.24	7136.88	316.82	7137.07	318.83	7137.2
320.5	7137.3	333.39	7137.73	335.59	7137.82	335.81	7137.83	342.14	7138.03
351.15	7138.5	352.3	7138.54	360.48	7138.96	367.52	7139.28	371.61	7139.48
374.66	7139.6	385.86	7139.81	386.74	7139.85	387.72	7139.86	388.23	7139.9
400	7140								

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
0	.06	155.09	.06	263.81	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

155.09	263.81	109	100	92	.1	.3
--------	--------	-----	-----	----	----	----

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 17

INPUT

Description:

Station Elevation Data num= 79

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7157.8	1.41	7158.57	17.25	7157.53	23.49	7155.88
						24.06	7155.87

kurieRoad.rep									
27.02	7156	27.49	7155.28	29.58	7154.82	34.27	7154.05	37.08	7153.06
38.38	7152.6	39.55	7152.01	55.3	7150.24	57.2	7150.03	62.77	7149.18
70.67	7148.1	74.17	7147.65	89.58	7146.01	95.28	7144.9	100.35	7144.03
105.51	7143	110.53	7142.05	113.17	7141.62	122.73	7140.01	129.51	7138.41
130.02	7138.3	130.95	7138.03	131.65	7137.74	134.31	7137.05	137.99	7136.04
138.97	7135.6	143.55	7134.01	145.43	7132.61	146.11	7132.03	147.82	7131.5
152.16	7130	156.8	7128.38	157.85	7128.01	158.59	7127.89	159.01	7127.89
167.22	7127.2	167.5	7127.19	168.8	7127.21	181.26	7127.08	189.65	7126.77
207.37	7126.5	210.2	7126.51	219.14	7126.36	222.63	7126.31	231.55	7126.12
231.76	7126.1	233.78	7126.24	235.9	7126.71	240.4	7127.37	242.12	7128.01
245.31	7129.2	247.76	7130.04	255.16	7131.41	257.97	7132.03	276.84	7133.95
277.59	7134	298.76	7135.27	309.07	7136.04	312.26	7136.04	312.79	7136.04
314.57	7136	328.88	7137.13	331.29	7137.26	341.71	7138.03	347.09	7138.42
352.02	7138.7	362.98	7139.47	372.23	7140.01	381.77	7140.6	383.71	7140.76
387.07	7141	393.75	7141.48	398.75	7141.83	400	7141.91		

Manning's n Values num= 3  
 Sta n Val sta n Val Sta n Val  
 0 .06 138.97 .06 277.59 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 138.97 277.59 103 100 103 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 16

INPUT

Description:

Station Elevation Data num= 76									
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7153.1	3.91	7151.53	12.15	7149.89	18.49	7149.01	19.8	7148.93
30.93	7148.2	31.18	7148.19	33.28	7148.05	33.71	7148	33.98	7147.96
39.55	7147.2	44.53	7146.3	45.35	7146.15	45.6	7146.1	46.14	7146.01
64.22	7144.2	65.28	7144.03	66.86	7143.75	76.94	7142.05	83.46	7141.32
92.73	7140.3	95.05	7140.01	98.34	7139.26	104.44	7138.03	114.66	7136.13
115.15	7136	125.17	7134.23	126.27	7134.01	126.73	7133.93	128.65	7133.54
134.29	7132.4	135.94	7132.03	138.58	7131.28	143.01	7130.04	147.35	7129.25
153.92	7128	160.86	7126.3	162.25	7126.03	167.39	7125.43	173.33	7124.73
178.23	7124.2	179.31	7124.04	181.81	7124.04	187.74	7124.04	194.83	7124.04
210.7	7124	221.19	7125.93	221.66	7126.03	224.06	7127.08	226.08	7128.01
233.51	7129.5	235.72	7130.04	236.61	7130.04	237.23	7130.04	243.72	7130.4
245.03	7130.5	249.81	7130.69	253.54	7130.84	256.08	7130.94	259.37	7131.08
263.91	7131.3	266.55	7131.42	278.08	7132.03	292.22	7133.14	303.51	7134.01
310.33	7134.4	317.5	7134.91	334.88	7136.04	338.14	7136.36	354.98	7138.03
358.24	7138.2	386.29	7140.01	386.92	7140.06	388.41	7140.16	398.02	7140.84
400	7141								

Manning's n Values num= 3  
 Sta n Val sta n Val Sta n Val  
 0 .06 143.01 .06 236.61 .06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.  
 143.01 236.61 94 100 104 .1 .3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 15

KurieRoad.rep

INPUT

Description:

Station Elevation Data		num= 78		Sta Elev		Sta Elev		Sta Elev	
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7144.6	4.97	7144.15	15.72	7143.61	16.39	7143.56	17.37	7143.51
27.22	7142.6	28.96	7142.34	31.74	7142.05	39	7140.97	39.11	7140.95
44.38	7140.5	47.38	7140.19	49.88	7140.01	52.05	7139.85	56.36	7139.47
57.99	7139.3	60.75	7139.09	67.05	7138.45	74.71	7138.03	80.51	7137.68
84.15	7137.4	93.21	7136.5	94.73	7136.35	97	7136.04	106.99	7135.07
119.44	7134	123.56	7133.25	128.54	7132.32	129.96	7132.03	130.75	7131.8
132.32	7131.4	137.83	7130.04	142.8	7129.09	148	7128.01	149.8	7127.49
155.17	7126	155.37	7126.01	159.16	7125.76	183.65	7124.04	187.53	7123.56
198.83	7122	198.89	7122.01	198.9	7122.01	210.94	7122	218.35	7124.02
218.4	7124.04	218.44	7124.06	221.49	7126.03	226.17	7127.2	230.45	7128.01
230.74	7128.01	234.35	7128.17	245.19	7128.58	249.5	7128.8	260.13	7129.19
275.65	7129.82	277.53	7129.89	281	7130.04	286.04	7130.3	295.32	7130.9
305.45	7131.55	307.09	7131.67	311.98	7132.03	322.77	7133.2	330.24	7134.01
340.34	7134.66	346.23	7134.98	351.49	7135.3	363.39	7135.8	365.65	7135.91
368.71	7136.04	373.65	7136.75	377.58	7137.34	381.61	7138	384.7	7138.26
391.02	7138.72	399.41	7139.24	400	7139.28				

Manning's n values		num= 3		Sta n Val	
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	149.8	.06	230.74	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	149.8	230.74		105	100	115	.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 14

INPUT

Description:

Station Elevation Data		num= 71		Sta Elev		Sta Elev		Sta Elev	
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7140.5	10.2	7139.32	17.67	7138.34	20.51	7138.62	20.52	7138.62
25.82	7138	30.99	7137.23	32.45	7137	38.2	7136.04	51.73	7134.13
52.51	7134	52.82	7133.98	53.59	7133.87	66.28	7132.03	72.62	7131
78.69	7130	83.12	7129.71	84.02	7129.67	87.95	7129.43	89.52	7129.39
95.5	7129.1	101.31	7128.87	105.86	7128.86	121.22	7128.01	127.64	7128.01
137.93	7126.8	143.7	7126.03	145.91	7125.14	149.58	7124.04	158.92	7123.29
163.5	7123.1	170.55	7122.64	188.24	7122.01	190.08	7122.01	191.71	7122.01
192.13	7122	195.51	7122.01	217.1	7122.01	220.66	7122.56	224.95	7123.08
226.45	7123.2	247.02	7123.86	250.37	7124.04	255.12	7124.35	258.52	7124.59
268.88	7125.3	279.45	7126.03	286.77	7126.7	291.06	7127.14	300.05	7128.01
317.88	7129.5	324.11	7130.04	330.39	7130.57	330.49	7130.57	336.84	7130.94
339.1	7131.1	341.22	7131.18	344.05	7131.29	348.27	7131.46	351.26	7131.51
354.52	7131.6	358.34	7131.75	363.07	7131.94	363.58	7131.97	364.78	7132.03
372.07	7132.4	374.9	7132.55	379.91	7132.89	386.62	7133.31	393.42	7134.01
400	7134.7								

Manning's n Values		num= 3		Sta n Val	
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	127.64	.06	300.05	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	127.64	300.05		110	100	95	.1	.3

CROSS SECTION

KurieRoad.rep

RIVER: RIVER-1  
 REACH: Reach-1 RS: 13

INPUT

Description:

Station Elevation Data		num=		9					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
4	7128	37	7126	70	7125.3	105	7125.3	146	7126
170	7120	224	7120	285	7128	347	7134		

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
4	.06	146	.06	285	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	146	285		90	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 12

INPUT

Description:

Station Elevation Data		num=		87					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7125.1	1.85	7125.01	4.67	7124.84	9.65	7124.55	15.69	7124.25
17.27	7124.2	17.53	7124.15	20.53	7124.04	31.26	7123.81	32.85	7123.77
33.58	7123.8	34.09	7123.78	35.97	7123.78	47.44	7123.52	51.38	7123.5
67.14	7123.3	76.16	7123.29	79.2	7123.27	82.92	7123.28	87.94	7123.3
92.41	7123.3	97.15	7123.29	104.57	7123.4	108.08	7123.35	109.28	7123.32
113.41	7123.2	115.5	7123.24	118.78	7123.15	120.89	7123.17	124.55	7123.02
126.55	7123	134.23	7122.62	135.57	7122.6	144.52	7122.01	149.01	7121.67
158.02	7121.3	173.84	7120.23	175.61	7120.12	176.85	7120.03	207.65	7120.03
210.56	7120	217.37	7120.03	217.64	7120.03	220.76	7120.59	231.48	7122.01
237.85	7122.7	250.24	7124.04	252.58	7124.25	253.47	7124.32	258.81	7124.77
264.28	7125.2	276.85	7126.03	280.32	7126.35	281.48	7126.47	283.84	7126.69
291.77	7127.4	296.04	7127.79	296.93	7127.87	298.31	7128.01	307.94	7128.75
316.95	7129.4	318.74	7129.52	320.01	7129.58	321.99	7129.73	323.25	7129.76
326.58	7130	327.1	7130.08	334.32	7130.34	336.47	7130.44	339.84	7130.49
342.95	7130.5	345.16	7130.61	350.78	7130.5	351.82	7130.56	357.6	7130.66
358.87	7130.7	361.3	7130.84	367.5	7130.93	372.13	7131.19	373.78	7131.26
377.68	7131.3	379.17	7131.35	381.74	7131.32	383.94	7131.45	384.15	7131.47
389.47	7131.4	400	7131.95						

Manning's n values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	109.28	.06	250.24	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	109.28	250.24		161	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 11

INPUT

Description:

Station Elevation Data	num=	67
------------------------	------	----

KurieRoad.rep

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7121.9	18.7	7120.77	26.57	7120.43	35.56	7120.03	36.3	7120.03
48.58	7119.8	55.72	7119.69	58.52	7119.65	62.66	7119.57	66.67	7119.52
73.32	7119.4	85.87	7119.17	97.38	7119.02	102	7118.97	105.96	7118.89
108.04	7118.9	117.69	7118.71	121.08	7118.66	124.67	7118.61	127.41	7118.56
131.16	7118.5	132.31	7118.49	135.82	7118.45	149.19	7118.31	150.13	7118.3
151.25	7118.3	152.77	7118.27	166.5	7118.11	171.78	7118.04	175.84	7118.04
176.5	7118	176.99	7118.04	177.65	7118.04	187.57	7118.04	199.05	7118.04
201.56	7118	207.46	7118.04	207.83	7118.04	219.9	7118.82	242.63	7120.03
244.05	7120	244.42	7120.03	246.59	7120.03	265.11	7121.34	270.25	7121.64
275.07	7122	283.86	7122.87	297.71	7124.04	298.44	7124.04	311.43	7125.27
315.11	7125.6	319.79	7126.03	332.22	7127.67	334.64	7128.01	338.82	7128.63
350.01	7130	353.12	7130.51	354.1	7130.66	359.35	7131.45	362.67	7132.03
366.15	7132	367.19	7132.03	391.89	7133.61	392.26	7133.64	394.73	7133.69
398.48	7134	400	7134.01						

Manning's n Values	num=
Sta n Val	Sta n Val
0 .06	265.11 .06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	0	265.11		105	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 10

INPUT

Description:

Station Elevation Data	num=
Sta Elev	Sta Elev
-10 7120	14 7118
200 7116	220 7116
	46 7116
	245 7118
	89 7117.1
	285 7122
	140 7117.2

Manning's n Values	num=
Sta n Val	Sta n Val
-10 .06	-10 .06
	285 .06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	-10	285		70	200		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 8

INPUT

Description:

Station Elevation Data	num=
Sta Elev	Sta Elev
-60 7120	-23 7118
301 7116	332 7122
	-13 7116
	100 7114
	282 7114

Manning's n Values	num=
Sta n Val	Sta n Val
-60 .06	-60 .06
	332 .06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	-60	332		35	200		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 6

INPUT

Description:

Station Elevation Data num= 7

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
13	7122	32	7120	73	7116	120	7114	316	7114
355	7122	374	7123						

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
13	.06	32	.06	355	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

32	355	150	150	105	.1	.3
----	-----	-----	-----	-----	----	----

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 4.50

INPUT

Description:

Station Elevation Data num= 10

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
17	7126	30	7124	50	7120	96	7116	120	7114
200	7114	350	7114	398	7116	432	7120	475	7121

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
17	.06	50	.06	432	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

50	432	25	25	25	.1	.3
----	-----	----	----	----	----	----

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 4.25

INPUT

Description:

Station Elevation Data num= 17

Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
-8	7126	34	7124	43	7122	52	7120	68	7118
100	7118	115	7120	219	7122	375	7122	395	7120
428	7118	459	7116	475	7115	490	7116	505	7118
540	7118.5	559.91	7119.63						

Manning's n Values num= 3

Sta	n Val	Sta	n Val	Sta	n Val
-8	.06	395	.06	559.91	.06

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

395	559.91	25	25	25	.1	.3
-----	--------	----	----	----	----	----

CROSS SECTION

kurieRoad.rep

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 4

INPUT

Description:

Station Elevation Data		num=		16					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
-30	7128	30	7124	50	7120	70	7118	97	7118
115	7120	220	7122	378	7122	432	7118	455	7116
505	7114	510	7113.5	515	7114	555	7116	585	7117
646	7120								

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
-30	.06	378	.06	646	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	378	646		25	25		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 3.75

INPUT

Description:

Station Elevation Data		num=		19					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
8	7124	30	7120	75	7118	100	7116	110	7120
117	7119	130	7112	175	7108	184	7106	235	7104
277	7110	365	7110	416	7114	468	7114	508	7114
513	7113.4	518	7114	560	7116	593	7118		

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
8	.06	130	.06	277	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	130	277		95	75		.1	.3

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 3

INPUT

Description:

Station Elevation Data		num=		89					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7130	1.85	7130.04	6.43	7130.04	6.61	7130.04	7.26	7130.04
8.63	7129.7	17.18	7128.01	18.14	7127.65	21.97	7126.03	25.69	7124.83
28.36	7124	31.1	7123.25	36.36	7122.01	43.43	7120.42	44.91	7120.03
46.89	7119.8	63.61	7118.04	81.21	7118.04	101.68	7120	110.89	7120
114.28	7118	115.08	7117.43	117.14	7116.01	117.16	7116	120.96	7114.4
121.41	7114	122.02	7113.62	124.31	7112.04	128.41	7110.67	130.05	7110.01
135.04	7108.6	137.39	7108.02	140.19	7107.54	149.07	7106.04	152.53	7104.86
157.38	7104	158.06	7103.89	164.13	7102.02	164.16	7102.02	166.49	7102.02
176.59	7102	184.98	7102.02	190.33	7102.02	200.17	7102.02	201	7102.05
202.75	7102.1	230.91	7103.04	258.63	7104.01	261.76	7104.63	271.29	7106.04



KurieRoad.rep

274.77	7106.5	276.07	7106.56	278.16	7106.7	284.54	7107.27	286.26	7107.36
287.64	7107.4	298.88	7108.02	299.8	7108.06	300.39	7108.09	301	7108.14
307.73	7108.6	310.59	7108.8	319.82	7109.49	323.65	7109.76	323.95	7109.78
324.39	7109.8	327.84	7109.79	328.64	7109.84	332.06	7109.66	335.6	7109.32
341.74	7108.8	342.46	7108.72	343.34	7108.62	346.83	7108.54	348.04	7108.41
352.27	7108.2	352.68	7108.22	354.08	7108.29	357.69	7108.32	360.36	7108.64
363.35	7108.7	365.63	7109.02	372.6	7109.95	372.83	7109.98	373.09	7110.01
379.54	7110.8	389.55	7112.04	390.38	7112.1	400	7112.77		

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	130.05	.06	323.95	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	130.05	323.95		115	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 2

INPUT

Description:

Station Elevation Data		num=		49					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7130.2	.66	7130.04	3.33	7129.54	10.86	7128.01	15.16	7126.9
18.22	7126	23.76	7124.57	27.27	7124.04	31.53	7122.74	32.68	7122.01
36.35	7120.8	38.49	7120.03	48.77	7118.56	52.44	7118.04	59.65	7118.04
64.19	7118	90.33	7118.04	98.21	7119.79	99.03	7119.97	104.19	7119.97
104.39	7120	104.39	7119.97	109.69	7118.04	111.21	7117.27	113.43	7116.19
113.8	7116	113.86	7115.99	119.38	7114.03	120.79	7113.62	126.75	7112.04
134.98	7110.1	135.38	7110.01	136.33	7109.84	147.54	7108.02	148.4	7107.9
161.13	7106	171.39	7104.09	171.62	7104.05	171.83	7104.01	172.05	7103.97
183.13	7102	200	7101.5	240	7102	312	7104	350	7108
408	7107.5	436	7112	510	7116	536	7116.7		

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	147.54	.06	350	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.
	147.54	350		95	100		.1	.3

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 1

INPUT

Description:

Station Elevation Data		num=		14					
Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev	Sta	Elev
0	7130	33	7120	54	7118	80	7116.5	100	7120
106	7120	130	7110	165	7102	200	7100.4	315	7100.6
400	7110	437	7114	480	7115.4	550	7118		

Manning's n Values		num=		3	
Sta	n Val	Sta	n Val	Sta	n Val
0	.06	130	.06	400	.06

Bank Sta:	Left	Right	Lengths:	Left Channel	Right	Coeff	Contr.	Expan.

130 400

KurieRoad.rep

0 0 0

.1 .3

SUMMARY OF MANNING'S N VALUES

River: RIVER-1

Reach	River Sta.	n1	n2	n3
Reach-1	38	.06	.06	.06
Reach-1	37	.06	.06	.06
Reach-1	36	.06	.06	.06
Reach-1	35	.06	.06	.06
Reach-1	34	.06	.06	.06
Reach-1	33	.06	.06	.06
Reach-1	32	.06	.06	.06
Reach-1	31	.06	.06	.06
Reach-1	30	.06	.06	.06
Reach-1	29	.06	.06	.06
Reach-1	27.4	.06	.06	.06
Reach-1	27.2	.06	.06	.06
Reach-1	27	.06	.06	.06
Reach-1	26.65	.06	.06	.06
Reach-1	24.5	.06	.06	.06
Reach-1	22	.06	.06	.06
Reach-1	21	.06	.06	.06
Reach-1	20	.06	.06	.06
Reach-1	19	.06	.06	.06
Reach-1	18	.06	.06	.06
Reach-1	17	.06	.06	.06
Reach-1	16	.06	.06	.06
Reach-1	15	.06	.06	.06
Reach-1	14	.06	.06	.06
Reach-1	13	.06	.06	.06
Reach-1	12	.06	.06	.06
Reach-1	11	.06	.06	.06
Reach-1	10	.06	.06	.06
Reach-1	8	.06	.06	.06
Reach-1	6	.06	.06	.06
Reach-1	4.50	.06	.06	.06
Reach-1	4.25	.06	.06	.06
Reach-1	4	.06	.06	.06
Reach-1	3.75	.06	.06	.06
Reach-1	3	.06	.06	.06
Reach-1	2	.06	.06	.06
Reach-1	1	.06	.06	.06

SUMMARY OF REACH LENGTHS

River: RIVER-1

Reach	River Sta.	Left	Channel	Right
Reach-1	38	97	100	110
Reach-1	37	68	100	126
Reach-1	36	97	100	102
Reach-1	35	90	100	110
Reach-1	34	103	100	103
Reach-1	33	98	100	102

KurieRoad.rep

Reach-1	32	121	100	98
Reach-1	31	166	100	76
Reach-1	30	158	100	50
Reach-1	29	162	160	116
Reach-1	27.4	20	20	20
Reach-1	27.2	20	20	20
Reach-1	27	35	35	35
Reach-1	26.65	74	215	273
Reach-1	24.5	163	250	267
Reach-1	22	117	100	68
Reach-1	21	130	100	58
Reach-1	20	102	100	96
Reach-1	19	104	100	92
Reach-1	18	109	100	92
Reach-1	17	103	100	103
Reach-1	16	94	100	104
Reach-1	15	105	100	115
Reach-1	14	110	100	95
Reach-1	13	90	100	103
Reach-1	12	161	100	97
Reach-1	11	105	100	101
Reach-1	10	70	200	276
Reach-1	8	35	200	275
Reach-1	6	150	150	105
Reach-1	4.50	25	25	25
Reach-1	4.25	25	25	25
Reach-1	4	25	25	25
Reach-1	3.75	95	75	20
Reach-1	3	115	100	50
Reach-1	2	95	100	90
Reach-1	1	0	0	0

ERRORS WARNINGS AND NOTES

Errors warnings and Notes for Plan : Mixed 100 yr

River: RIVER-1 Reach: Reach-1 RS: 38 Profile: PF 1

warning:The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

warning:The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 37 Profile: PF 1

warning:The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.

warning:The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

warning:The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

warning:During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated

water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The

KurieRoad.rep

program defaulted to critical depth.

River: RIVER-1 Reach: Reach-1 RS: 36 Profile: PF 1

warning:The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

warning:The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 35 Profile: PF 1

warning:The energy equation could not be balanced within the specified number of iterations. The program used critical depth

for the water surface and continued on with the calculations.

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

warning:The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

warning:During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The

program defaulted to critical depth.

River: RIVER-1 Reach: Reach-1 RS: 34 Profile: PF 1

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 32 Profile: PF 1

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 31 Profile: PF 1

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 27.4 Profile: PF 1

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 27 Profile: PF 1

warning:The energy equation could not be balanced within the specified number of iterations. The program used critical depth

for the water surface and continued on with the calculations.

warning:The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

warning:During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The

program defaulted to critical depth.

River: RIVER-1 Reach: Reach-1 RS: 26.65 Profile: PF 1

warning:The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

warning:The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

warning:The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Note: Program found supercritical flow starting at this cross section.

KurieRoad.rep

River: RIVER-1 Reach: Reach-1 RS: 24.5 Profile: PF 1  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.  
Note: Hydraulic jump has occurred between this cross section and the previous upstream section.

River: RIVER-1 Reach: Reach-1 RS: 22 Profile: PF 1  
Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 21 Profile: PF 1  
Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 20 Profile: PF 1  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 19 Profile: PF 1  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 18 Profile: PF 1  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 17 Profile: PF 1  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 16 Profile: PF 1  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 15 Profile: PF 1  
Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 14 Profile: PF 1  
Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 13 Profile: PF 1  
Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 12 Profile: PF 1  
Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.  
Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 11 Profile: PF 1

KurieRoad.rep

Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

River: RIVER-1 Reach: Reach-1 RS: 10 Profile: PF 1

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 4.50 Profile: PF 1

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 4.25 Profile: PF 1

Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.

Warning: Divided flow computed for this cross-section.

Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

River: RIVER-1 Reach: Reach-1 RS: 4 Profile: PF 1

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

Note: Program found supercritical flow starting at this cross section.

River: RIVER-1 Reach: Reach-1 RS: 3.75 Profile: PF 1

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

River: RIVER-1 Reach: Reach-1 RS: 3 Profile: PF 1

Note: Hydraulic jump has occurred between this cross section and the previous upstream section.

River: RIVER-1 Reach: Reach-1 RS: 2 Profile: PF 1

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

KurieRoad.rep

Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

KurieRoad.rep

HEC-RAS Version 4.1.0 Jan 2010  
 U.S. Army Corps of Engineers  
 Hydrologic Engineering Center  
 609 Second Street  
 Davis, California

```

X      X  XXXXXX  XXXX      XXXX      XX      XXXX
X      X  X      X      X      X  X  X  X  X
X      X  X      X      X  X      X  X  X  X
XXXXXXXX XXXX  X      XXX XXXX  XXXXXXXX  XXXX
X      X  X      X      X  X  X  X  X  X  X
X      X  X      X      X  X  X  X  X  X  X
X      X  XXXXXX  XXXX      X  X  X  X  XXXXX
    
```

PROJECT DATA

Project Title: Eagle Rising  
 Project File : KurieRoad.prj  
 Run Date and Time: 6/10/2012 12:51:52 PM

Project in English units

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 38

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7164.47	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.21	wt. n-val.		0.060
w.s. Elev (ft)	7164.26	Reach Len. (ft)	97.00	100.00
110.00				
Crit w.s. (ft)	7163.23	Flow Area (sq ft)		150.11
E.G. Slope (ft/ft)	0.007955	Area (sq ft)		150.11
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	70.21	Top width (ft)		70.21
Vel Total (ft/s)	3.64	Avg. vel. (ft/s)		3.64
Max Chl Dpth (ft)	2.81	Hydr. Depth (ft)		2.14
Conv. Total (cfs)	6132.9	Conv. (cfs)		6132.9
Length wtd. (ft)	100.00	wetted Per. (ft)		70.85
Min ch El (ft)	7161.45	Shear (lb/sq ft)		1.05
Alpha	1.00	Stream Power (lb/ft s)	350.55	0.00
0.00				
Frctn Loss (ft)	1.58	Cum Volume (acre-ft)	0.00	29.83
		Page 1		



KurieRoad.rep

C & E Loss (ft)                      0.06      Cum SA (acres)                      0.02      12.16

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.  
 Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
 This may indicate the need for additional cross sections.  
 Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 37

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7162.81	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.85	Wt. n-val.		0.060
W.S. Elev (ft)	7161.96	Reach Len. (ft)	68.00	100.00
126.00				
Crit W.S. (ft)	7161.96	Flow Area (sq ft)		73.97
E.G. Slope (ft/ft)	0.045691	Area (sq ft)		73.97
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	44.09	Top Width (ft)		44.09
Vel Total (ft/s)	7.39	Avg. Vel. (ft/s)		7.39
Max Chl Dpth (ft)	1.91	Hydr. Depth (ft)		1.68
Conv. Total (cfs)	2559.0	Conv. (cfs)		2559.0
Length wtd. (ft)	100.00	wetted Per. (ft)		44.81
Min Ch El (ft)	7160.05	Shear (lb/sq ft)		4.71
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00				
Frctn Loss (ft)	1.01	Cum Volume (acre-ft)	0.00	29.57
C & E Loss (ft)	0.21	Cum SA (acres)	0.02	12.03

Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.  
 Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

KurieRoad.rep

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1

RS: 36

CROSS SECTION OUTPUT Profile #PF 1

		Element	Left OB	Channel
E.G. Elev (ft)	7161.26			
Right OB				
Vel Head (ft)	0.14	wt. n-val.		0.060
W.S. Elev (ft)	7161.12	Reach Len. (ft)	97.00	100.00
102.00				
Crit W.S. (ft)	7159.57	Flow Area (sq ft)		180.68
E.G. Slope (ft/ft)	0.004299	Area (sq ft)		180.68
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top Width (ft)	69.95	Top width (ft)		69.95
Vel Total (ft/s)	3.03	Avg. vel. (ft/s)		3.03
Max Chl Dpth (ft)	3.12	Hydr. Depth (ft)		2.58
Conv. Total (cfs)	8342.4	Conv. (cfs)		8342.4
Length wtd. (ft)	100.00	wetted Per. (ft)		70.97
Min Ch El (ft)	7158.00	Shear (lb/sq ft)		0.68
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00				
Frctn Loss (ft)	1.02	cum volume (acre-ft)	0.00	29.28
C & E Loss (ft)	0.05	Cum SA (acres)	0.02	11.89

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

KurieRoad.rep

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 35

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7160.19	Element	Left OB	channel
Right OB Vel Head (ft)	0.66	Wt. n-Val.		0.060
W.S. Elev (ft)	7159.53	Reach Len. (ft)	90.00	100.00
110.00 Crit W.S. (ft)	7159.53	Flow Area (sq ft)		83.91
E.G. Slope (ft/ft)	0.048662	Area (sq ft)		83.91
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top Width (ft)	64.11	Top Width (ft)		64.11
Vel Total (ft/s)	6.52	Avg. Vel. (ft/s)		6.52
Max Chl Dpth (ft)	1.52	Hydr. Depth (ft)		1.31
Conv. Total (cfs)	2479.7	Conv. (cfs)		2479.7
Length Wtd. (ft)	100.00	Wetted Per. (ft)		64.37
Min Ch El (ft)	7158.01	Shear (lb/sq ft)		3.96
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	1.94	Cum Volume (acre-ft)	0.00	28.98
C & E Loss (ft)	0.13	Cum SA (acres)	0.02	11.74

Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4. This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

CROSS SECTION

RIVER: RIVER-1

REACH: Reach-1 RS: 34

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7157.51	Element	Left OB	Channel
Right OB Vel Head (ft)	0.22	wt. n-val.		0.060
W.S. Elev (ft)	7157.29	Reach Len. (ft)	103.00	100.00
103.00 Crit w.s. (ft)	7156.51	Flow Area (sq ft)		144.14
E.G. Slope (ft/ft)	0.010323	Area (sq ft)		144.14
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top Width (ft)	77.43	Top Width (ft)		77.43
Vel Total (ft/s)	3.80	Avg. Vel. (ft/s)		3.80
Max Chl Dpth (ft)	2.62	Hydr. Depth (ft)		1.86
Conv. Total (cfs)	5383.8	Conv. (cfs)		5383.8
Length wtd. (ft)	100.00	wetted Per. (ft)		77.81
Min Ch El (ft)	7154.67	Shear (lb/sq ft)		1.19
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	0.49	Cum Volume (acre-ft)	0.00	28.72
C & E Loss (ft)	0.04	Cum SA (acres)	0.02	11.58

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 33

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7156.98	Element	Left OB	Channel
Right OB Vel Head (ft)	0.09	wt. n-val.		0.060
W.S. Elev (ft)	7156.90	Reach Len. (ft)	98.00	100.00
102.00 Crit w.s. (ft)		Flow Area (sq ft)		232.50
E.G. Slope (ft/ft)	0.002861	Area (sq ft)		232.50

		kurieRoad.rep	
Q Total (cfs)	547.00	Flow (cfs)	547.00
Top width (ft)	97.06	Top width (ft)	97.06
Vel Total (ft/s)	2.35	Avg. Vel. (ft/s)	2.35
Max Chl Dpth (ft)	2.85	Hydr. Depth (ft)	2.40
Conv. Total (cfs)	10226.4	Conv. (cfs)	10226.4
Length wtd. (ft)	100.00	Wetted Per. (ft)	98.23
Min Ch El (ft)	7154.05	Shear (lb/sq ft)	0.42
Alpha	1.00	Stream Power (lb/ft s)	400.00
0.00			0.00
Frctn Loss (ft)	0.23	Cum Volume (acre-ft)	0.00
C & E Loss (ft)	0.01	Cum SA (acres)	0.02
			11.38

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 32

CROSS SECTION OUTPUT Profile #PF 1

		Profile #PF 1		
E.G. Elev (ft)	7156.74	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.05	wt. n-val.		0.060
W.S. Elev (ft)	7156.69	Reach Len. (ft)	121.00	100.00
98.00				
Crit W.S. (ft)		Flow Area (sq ft)		299.03
E.G. Slope (ft/ft)	0.001867	Area (sq ft)		299.03
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	132.88	Top width (ft)		132.88
Vel Total (ft/s)	1.83	Avg. Vel. (ft/s)		1.83
Max Chl Dpth (ft)	2.64	Hydr. Depth (ft)		2.25
Conv. Total (cfs)	12660.3	Conv. (cfs)		12660.3
Length wtd. (ft)	100.00	wetted Per. (ft)		133.78
Min Ch El (ft)	7154.05	Shear (lb/sq ft)		0.26
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00				
Frctn Loss (ft)	0.37	Cum Volume (acre-ft)	0.00	27.67
C & E Loss (ft)	0.02	Cum SA (acres)	0.02	11.11

KurieRoad.rep

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1                      RS: 31

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7156.36	Element	Left OB	Channel
Right OB Vel Head (ft)	0.22	wt. n-val.		0.060
w.s. Elev (ft)	7156.14	Reach Len. (ft)	166.00	100.00
76.00 Crit w.s. (ft)		Flow Area (sq ft)		146.59
E.G. Slope (ft/ft)	0.010617	Area (sq ft)		146.59
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	82.50	Top width (ft)		82.50
Vel Total (ft/s)	3.73	Avg. Vel. (ft/s)		3.73
Max Chl Dpth (ft)	2.14	Hydr. Depth (ft)		1.78
Conv. Total (cfs)	5308.6	Conv. (cfs)		5308.6
Length wtd. (ft)	100.00	wetted Per. (ft)		82.90
Min Ch El (ft)	7154.00	Shear (lb/sq ft)		1.17
Alpha 0.00	1.00	Stream Power (lb/ft s)	145.00	0.00
Frctn Loss (ft)	0.43	Cum Volume (acre-ft)	0.00	27.16
C & E Loss (ft)	0.05	Cum SA (acres)	0.02	10.87

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1                      RS: 30

CROSS SECTION OUTPUT Profile #PF 1

kurieroad.rep

E.G. Elev (ft)	7155.87	Element	Left OB	Channel
Right OB Vel Head (ft)	0.04	Wt. n-Val.		0.060
W.S. Elev (ft)	7155.83	Reach Len. (ft)	158.00	100.00
50.00 Crit W.S. (ft)		Flow Area (sq ft)		328.16
E.G. Slope (ft/ft)	0.002308	Area (sq ft)		328.16
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	197.49	Top width (ft)		197.49
vel Total (ft/s)	1.67	Avg. Vel. (ft/s)		1.67
Max Chl Dpth (ft)	1.78	Hydr. Depth (ft)		1.66
Conv. Total (cfs)	11385.1	Conv. (cfs)		11385.1
Length Wtd. (ft)	100.00	Wetted Per. (ft)		197.91
Min Ch El (ft)	7154.05	Shear (lb/sq ft)		0.24
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	0.25	Cum Volume (acre-ft)	0.00	26.62
C & E Loss (ft)	0.00	Cum SA (acres)	0.02	10.55

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 29

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7155.63	Element	Left OB	Channel
Right OB Vel Head (ft)	0.04	Wt. n-Val.		0.060
W.S. Elev (ft)	7155.58	Reach Len. (ft)	162.00	160.00
116.00 Crit W.S. (ft)		Flow Area (sq ft)		331.79
E.G. Slope (ft/ft)	0.002671	Area (sq ft)		331.79
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	226.65	Top Width (ft)		226.65
Vel Total (ft/s)	1.65	Avg. Vel. (ft/s)		1.65
Max Chl Dpth (ft)	1.53	Hydr. Depth (ft)		1.46
Conv. Total (cfs)	10584.1	Conv. (cfs)		10584.1

kurieRoad.rep

Length wtd. (ft)	160.00	Wetted Per. (ft)		226.96
Min Ch El (ft)	7154.05	Shear (lb/sq ft)		0.24
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	0.53	Cum Volume (acre-ft)	0.00	25.86
C & E Loss (ft)	0.00	Cum SA (acres)	0.02	10.06

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 27.4

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7155.10	Element	Left OB	Channel
Right OB Vel Head (ft)	0.04	wt. n-val.		0.060
W.S. Elev (ft)	7155.06	Reach Len. (ft)	20.00	20.00
20.00 Crit w.s. (ft)		Flow Area (sq ft)		325.86
E.G. Slope (ft/ft)	0.004133	Area (sq ft)		325.86
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	300.84	Top width (ft)		300.84
Vel Total (ft/s)	1.68	Avg. Vel. (ft/s)		1.68
Max Chl Dpth (ft)	1.36	Hydr. Depth (ft)		1.08
Conv. Total (cfs)	8508.7	Conv. (cfs)		8508.7
Length wtd. (ft)	20.00	wetted Per. (ft)		300.98
Min Ch El (ft)	7153.70	Shear (lb/sq ft)		0.28
Alpha 0.00	1.00	Stream Power (lb/ft s)	385.00	0.00
Frctn Loss (ft)	0.17	Cum Volume (acre-ft)	0.00	24.65
C & E Loss (ft)	0.02	Cum SA (acres)	0.02	9.09

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
 This may indicate the need for additional cross sections.

CROSS SECTION



KurieRoad.rep

RIVER: RIVER-1  
 REACH: Reach-1 RS: 27.2

CROSS SECTION OUTPUT Profile #PF 1

		Element	Left OB	Channel
E.G. Elev (ft)	7154.91			
Right OB				
Vel Head (ft)	0.25	wt. n-Val.		0.060
W.S. Elev (ft)	7154.67	Reach Len. (ft)	20.00	20.00
20.00				
Crit w.s. (ft)		Flow Area (sq ft)		137.35
E.G. slope (ft/ft)	0.026128	Area (sq ft)		137.35
Q Total (cfs)	547.00	Flow (cfs)		547.00
Top width (ft)	138.31	Top width (ft)		138.31
Vel Total (ft/s)	3.98	Avg. Vel. (ft/s)		3.98
Max Chl Dpth (ft)	1.26	Hydr. Depth (ft)		0.99
Conv. Total (cfs)	3384.0	Conv. (cfs)		3384.0
Length wtd. (ft)	20.00	wetted Per. (ft)		138.43
Min Ch El (ft)	7153.40	Shear (lb/sq ft)		1.62
Alpha	1.00	Stream Power (lb/ft s)	390.00	0.00
0.00				
Frctn Loss (ft)	0.74	Cum volume (acre-ft)	0.00	24.54
C & E Loss (ft)	0.04	Cum SA (acres)	0.02	8.99

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 27

CROSS SECTION OUTPUT Profile #PF 1

		Element	Left OB	Channel
E.G. Elev (ft)	7154.13			
Right OB				
Vel Head (ft)	0.61	wt. n-Val.		0.060
W.S. Elev (ft)	7153.52	Reach Len. (ft)	35.00	35.00
35.00				
Crit w.s. (ft)	7153.52	Flow Area (sq ft)		115.80
E.G. slope (ft/ft)	0.050406	Area (sq ft)		115.80
Q Total (cfs)	724.00	Flow (cfs)		724.00

		kurieRoad.rep	
Top width (ft)	96.92	Top width (ft)	96.92
Vel Total (ft/s)	6.25	Avg. vel. (ft/s)	6.25
Max chl Dpth (ft)	1.52	Hydr. Depth (ft)	1.19
Conv. Total (cfs)	3224.8	Conv. (cfs)	3224.8
Length wtd. (ft)	35.00	wetted Per. (ft)	97.11
Min Ch El (ft)	7152.00	Shear (lb/sq ft)	3.75
Alpha	1.00	Stream Power (lb/ft s)	395.00
0.00			0.00
Frctn Loss (ft)	1.69	Cum volume (acre-ft)	0.00
C & E Loss (ft)	0.02	Cum SA (acres)	0.02
			8.94

Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

#### CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 26.65

#### CROSS SECTION OUTPUT Profile #PF 1

		Element	Left OB	Channel
E.G. Elev (ft)	7149.81			
Right OB				
Vel Head (ft)	3.95	wt. n-val.		0.060
W.S. Elev (ft)	7145.86	Reach Len. (ft)	74.00	215.00
273.00				
Crit w.s. (ft)	7146.83	Flow Area (sq ft)		45.40
E.G. Slope (ft/ft)	0.459764	Area (sq ft)		45.40
Q Total (cfs)	724.00	Flow (cfs)		724.00
Top width (ft)	48.82	Top width (ft)		48.82
vel Total (ft/s)	15.95	Avg. Vel. (ft/s)		15.95
Max chl Dpth (ft)	1.86	Hydr. Depth (ft)		0.93
Conv. Total (cfs)	1067.8	Conv. (cfs)		1067.8

Length wtd. (ft)	215.00	KurieRoad.rep Wetted Per. (ft)		49.06
Min Ch El (ft)	7144.00	Shear (lb/sq ft)		26.56
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	3.99	Cum Volume (acre-ft)	0.00	24.42
C & E Loss (ft)	0.33	Cum SA (acres)	0.02	8.88

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.  
 Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
 This may indicate the need for additional cross sections.  
 Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.  
 Note: Program found supercritical flow starting at this cross section.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 24.5

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7140.62	Element	Left OB	Channel
Right OB Vel Head (ft)	0.36	wt. n-val.		0.060
w.s. Elev (ft)	7140.27	Reach Len. (ft)	163.00	250.00
267.00 Crit w.s. (ft)	7139.87	Flow Area (sq ft)		150.99
E.G. slope (ft/ft)	0.021616	Area (sq ft)		150.99
Q Total (cfs)	724.00	Flow (cfs)		724.00
Top width (ft)	99.61	Top width (ft)		99.61
vel Total (ft/s)	4.80	Avg. vel. (ft/s)		4.80
Max chl Dpth (ft)	3.27	Hydr. Depth (ft)		1.52
Conv. Total (cfs)	4924.4	Conv. (cfs)		4924.4
Length wtd. (ft)	250.00	wetted Per. (ft)		99.91
Min Ch El (ft)	7137.00	shear (lb/sq ft)		2.04
Alpha 0.00	1.00	Stream Power (lb/ft s)	257.00	0.00
Frctn Loss (ft)	4.15	Cum volume (acre-ft)	0.00	23.94
C & E Loss (ft)	0.02	Cum SA (acres)	0.02	8.51

KurieRoad.rep

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Note: Hydraulic jump has occurred between this cross section and the previous upstream section.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 22

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7136.45	Element	Left OB	Channel
Right OB Vel Head (ft)	0.28	wt. n-Val.		0.060
W.S. Elev (ft)	7136.17	Reach Len. (ft)	117.00	100.00
68.00 Crit w.s. (ft)		Flow Area (sq ft)		171.05
E.G. Slope (ft/ft)	0.013146	Area (sq ft)		171.05
Q Total (cfs)	724.00	Flow (cfs)		724.00
Top width (ft)	93.40	Top width (ft)		93.40
Vel Total (ft/s)	4.23	Avg. vel. (ft/s)		4.23
Max chl Dpth (ft)	2.17	Hydr. Depth (ft)		1.83
Conv. Total (cfs)	6314.5	Conv. (cfs)		6314.5
Length wtd. (ft)	100.00	wetted Per. (ft)		93.99
Min ch El (ft)	7134.00	Shear (lb/sq ft)		1.49
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	0.88	Cum Volume (acre-ft)	0.00	23.01
C & E Loss (ft)	0.02	Cum SA (acres)	0.02	7.96

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 21

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7135.55	Element	Left OB	Channel
Right OB Vel Head (ft)	0.21	wt. n-val.		0.060
W.S. Elev (ft)	7135.34	Reach Len. (ft)	130.00	100.00
58.00 Crit W.S. (ft)		Flow Area (sq ft)		195.79
E.G. Slope (ft/ft)	0.006310	Area (sq ft)		195.79
Q Total (cfs)	724.00	Flow (cfs)		724.00
Top width (ft)	75.07	Top width (ft)		75.07
Vel Total (ft/s)	3.70	Avg. Vel. (ft/s)		3.70
Max Chl Dpth (ft)	3.34	Hydr. Depth (ft)		2.61
Conv. Total (cfs)	9114.2	Conv. (cfs)		9114.2
Length wtd. (ft)	100.00	wetted Per. (ft)		75.97
Min Ch El (ft)	7132.00	Shear (lb/sq ft)		1.02
Alpha 0.00	1.00	Stream Power (lb/ft s)	326.28	0.00
Frctn Loss (ft)	1.11	Cum Volume (acre-ft)	0.00	22.59
C & E Loss (ft)	0.01	Cum SA (acres)	0.02	7.76

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 20

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7134.43	Element	Left OB	Channel
Right OB Vel Head (ft)	0.34	wt. n-val.		0.060
W.S. Elev (ft)	7134.09	Reach Len. (ft)	102.00	100.00
96.00 Crit W.S. (ft)		Flow Area (sq ft)		188.53
E.G. Slope (ft/ft)	0.020840	Area (sq ft)		188.53

		KurieRoad.rep		
Q Total (cfs)	881.00	Flow (cfs)		881.00
Top width (ft)	125.66	Top width (ft)		125.66
Vel Total (ft/s)	4.67	Avg. vel. (ft/s)		4.67
Max Chl Dpth (ft)	3.09	Hydr. Depth (ft)		1.50
Conv. Total (cfs)	6102.8	Conv. (cfs)		6102.8
Length wtd. (ft)	100.00	wetted Per. (ft)		126.17
Min Ch El (ft)	7131.00	Shear (lb/sq ft)		1.94
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	2.08	Cum volume (acre-ft)	0.00	22.15
C & E Loss (ft)	0.01	Cum SA (acres)	0.02	7.53

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 19

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7132.34	Element	Left OB	Channel
Right OB Vel Head (ft)	0.41	wt. n-val.		0.060
W.S. Elev (ft)	7131.93	Reach Len. (ft)	104.00	100.00
92.00 Crit w.s. (ft)		Flow Area (sq ft)		170.87
E.G. slope (ft/ft)	0.020709	Area (sq ft)		170.87
Q Total (cfs)	881.00	Flow (cfs)		881.00
Top width (ft)	97.54	Top width (ft)		97.54
Vel Total (ft/s)	5.16	Avg. vel. (ft/s)		5.16
Max Chl Dpth (ft)	2.08	Hydr. Depth (ft)		1.75
Conv. Total (cfs)	6122.0	Conv. (cfs)		6122.0
Length wtd. (ft)	100.00	wetted Per. (ft)		98.20
Min Ch El (ft)	7129.85	Shear (lb/sq ft)		2.25
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00

Frctn Loss (ft)	1.58	KurieRoad.rep Cum Volume (acre-ft)	0.00	21.74
C & E Loss (ft)	0.03	Cum SA (acres)	0.02	7.28

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1                      RS: 18

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7130.74	Element	Left OB	Channel
Right OB Vel Head (ft)	0.31	wt. n-val.		0.060
W.S. Elev (ft)	7130.43	Reach Len. (ft)	109.00	100.00
92.00 Crit W.S. (ft)		Flow Area (sq ft)		195.89
E.G. slope (ft/ft)	0.012422	Area (sq ft)		195.89
Q Total (cfs)	881.00	Flow (cfs)		881.00
Top width (ft)	93.74	Top width (ft)		93.74
Vel Total (ft/s)	4.50	Avg. Vel. (ft/s)		4.50
Max Chl Dpth (ft)	2.43	Hydr. Depth (ft)		2.09
Conv. Total (cfs)	7904.6	Conv. (cfs)		7904.6
Length Wtd. (ft)	100.00	Wetted Per. (ft)		94.18
Min Ch El (ft)	7128.00	Shear (lb/sq ft)		1.61
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	1.51	Cum Volume (acre-ft)	0.00	21.32
C & E Loss (ft)	0.01	Cum SA (acres)	0.02	7.06

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1                      RS: 17

KurieRoad.rep

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7129.23	Element	Left OB	Channel
Right OB Vel Head (ft)	0.42	Wt. n-Val.		0.060
W.S. Elev (ft)	7128.80	Reach Len. (ft)	103.00	100.00
103.00 Crit W.S. (ft)		Flow Area (sq ft)		170.37
E.G. Slope (ft/ft)	0.018774	Area (sq ft)		170.37
Q Total (cfs)	890.00	Flow (cfs)		890.00
Top width (ft)	88.65	Top width (ft)		88.65
Vel Total (ft/s)	5.22	Avg. Vel. (ft/s)		5.22
Max Chl Dpth (ft)	2.70	Hydr. Depth (ft)		1.92
Conv. Total (cfs)	6495.4	Conv. (cfs)		6495.4
Length Wtd. (ft)	100.00	wetted Per. (ft)		89.20
Min Ch El (ft)	7126.10	Shear (lb/sq ft)		2.24
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	1.29	Cum Volume (acre-ft)	0.00	20.90
C & E Loss (ft)	0.03	Cum SA (acres)	0.02	6.85

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 16

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7127.91	Element	Left OB	Channel
Right OB Vel Head (ft)	0.34	Wt. n-Val.		0.060
W.S. Elev (ft)	7127.58	Reach Len. (ft)	94.00	100.00
104.00 Crit W.S. (ft)		Flow Area (sq ft)		190.76
E.G. Slope (ft/ft)	0.009378	Area (sq ft)		190.76
Q Total (cfs)	890.00	Flow (cfs)		890.00



KurieRoad.rep

Top width (ft)	69.49	Top width (ft)	69.49
Vel Total (ft/s)	4.67	Avg. vel. (ft/s)	4.67
Max Chl Dpth (ft)	3.58	Hydr. Depth (ft)	2.75
Conv. Total (cfs)	9190.5	Conv. (cfs)	9190.5
Length wtd. (ft)	100.00	wetted Per. (ft)	70.30
Min Ch El (ft)	7124.00	Shear (lb/sq ft)	1.59
Alpha	1.00	Stream Power (lb/ft s)	400.00
0.00			0.00
Frctn Loss (ft)	1.12	Cum volume (acre-ft)	0.00
			20.48
C & E Loss (ft)	0.01	Cum SA (acres)	0.02
			6.67

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 15

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7126.79	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.42	wt. n-val.		-0.060
W.S. Elev (ft)	7126.36	Reach Len. (ft)	105.00	100.00
115.00				
Crit W.S. (ft)	7125.44	Flow Area (sq ft)		170.51
E.G. slope (ft/ft)	0.013585	Area (sq ft)		170.51
Q Total (cfs)	890.00	Flow (cfs)		890.00
Top width (ft)	68.97	Top width (ft)		68.97
Vel Total (ft/s)	5.22	Avg. vel. (ft/s)		5.22
Max Chl Dpth (ft)	4.36	Hydr. Depth (ft)		2.47
Conv. Total (cfs)	7635.9	Conv. (cfs)		7635.9
Length wtd. (ft)	100.00	wetted Per. (ft)		70.12
Min Ch El (ft)	7122.00	Shear (lb/sq ft)		2.06
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00				
Frctn Loss (ft)	1.96	Cum volume (acre-ft)	0.00	20.07

KurieRoad.rep

C & E Loss (ft) 0.01 Cum SA (acres) 0.02 6.51

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 14

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7124.82	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.49	wt. n-val.		0.060
W.S. Elev (ft)	7124.33	Reach Len. (ft)	110.00	100.00
95.00				
Crit W.S. (ft)		Flow Area (sq ft)		157.64
E.G. Slope (ft/ft)	0.030731	Area (sq ft)		157.64
Q Total (cfs)	890.00	Flow (cfs)		890.00
Top width (ft)	106.10	Top width (ft)		106.10
Vel Total (ft/s)	5.65	Avg. vel. (ft/s)		5.65
Max Chl Dpth (ft)	2.32	Hydr. Depth (ft)		1.49
Conv. Total (cfs)	5077.0	Conv. (cfs)		5077.0
Length wtd. (ft)	100.00	wetted Per. (ft)		106.31
Min Ch El (ft)	7122.00	Shear (lb/sq ft)		2.85
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00				
Frctn Loss (ft)	0.92	Cum Volume (acre-ft)	0.00	19.69
C & E Loss (ft)	0.10	Cum SA (acres)	0.02	6.31

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 13

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7123.81	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.16	wt. n-val.		0.060
W.S. Elev (ft)	7123.64	Reach Len. (ft)	90.00	100.00
103.00				
Crit W.S. (ft)		Flow Area (sq ft)		273.59
E.G. Slope (ft/ft)	0.004330	Area (sq ft)		273.59
Q Total (cfs)	890.00	Flow (cfs)		890.00
Top width (ft)	96.32	Top Width (ft)		96.32
Vel Total (ft/s)	3.25	Avg. Vel. (ft/s)		3.25
Max Chl Dpth (ft)	3.64	Hydr. Depth (ft)		2.84
Conv. Total (cfs)	13525.3	Conv. (cfs)		13525.3
Length wtd. (ft)	100.00	wetted Per. (ft)		97.00
Min ch El (ft)	7120.00	Shear (lb/sq ft)		0.76
Alpha	1.00	Stream Power (lb/ft s)	347.00	0.00
0.00				
Frctn Loss (ft)	0.79	Cum Volume (acre-ft)	0.00	19.20
C & E Loss (ft)	0.02	Cum SA (acres)	0.02	6.07

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 12

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7122.99	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.38	wt. n-val.		0.060
W.S. Elev (ft)	7122.62	Reach Len. (ft)	161.00	100.00
97.00				

		KurieRoad.rep		
Crit W.S. (ft)	7122.06	Flow Area (sq ft)		181.83
E.G. Slope (ft/ft)	0.018550	Area (sq ft)		181.83
Q Total (cfs)	897.00	Flow (cfs)		897.00
Top Width (ft)	102.55	Top Width (ft)		102.55
Vel Total (ft/s)	4.93	Avg. Vel. (ft/s)		4.93
Max Chl Dpth (ft)	2.62	Hydr. Depth (ft)		1.77
Conv. Total (cfs)	6586.0	Conv. (cfs)		6586.0
Length Wtd. (ft)	100.00	Wetted Per. (ft)		102.81
Min Ch El (ft)	7120.00	Shear (lb/sq ft)		2.05
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00				
Frctn Loss (ft)	2.95	Cum Volume (acre-ft)	0.00	18.67
C & E Loss (ft)	0.01	Cum SA (acres)	0.02	5.85

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

#### CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 11

#### CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7120.04	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.48	Wt. n-Val.		0.060
W.S. Elev (ft)	7119.56	Reach Len. (ft)	105.00	100.00
101.00				
Crit W.S. (ft)	7119.56	Flow Area (sq ft)		161.33
E.G. Slope (ft/ft)	0.054076	Area (sq ft)		161.33
Q Total (cfs)	897.00	Flow (cfs)		897.00
Top width (ft)	170.02	Top Width (ft)		170.02
Vel Total (ft/s)	5.56	Avg. Vel. (ft/s)		5.56
Max Chl Dpth (ft)	1.56	Hydr. Depth (ft)		0.95
Conv. Total (cfs)	3857.3	Conv. (cfs)		3857.3

KurieRoad.rep

Length wtd. (ft)	100.00	Wetted Per. (ft)		170.08
Min Ch El (ft)	7118.00	Shear (lb/sq ft)		3.20
Alpha 0.00	1.00	Stream Power (lb/ft s)	400.00	0.00
Frctn Loss (ft)	0.52	Cum Volume (acre-ft)	0.00	18.28
C & E Loss (ft)	0.13	Cum SA (acres)	0.02	5.53

Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4. This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 10

CROSS SECTION OUTPUT Profile #PF 1

		Element	Left OB	Channel
E.G. Elev (ft)	7119.02			
Right OB				
Vel Head (ft)	0.05	wt. n-val.		0.060
W.S. Elev (ft)	7118.98	Reach Len. (ft)	70.00	200.00
276.00				
Crit w.s. (ft)	7117.49	Flow Area (sq ft)		523.01
E.G. slope (ft/ft)	0.001823	Area (sq ft)		523.01
Q Total (cfs)	898.00	Flow (cfs)		898.00
Top width (ft)	252.51	Top width (ft)		252.51
Vel Total (ft/s)	1.72	Avg. vel. (ft/s)		1.72
Max chl Dpth (ft)	2.98	Hydr. Depth (ft)		2.07
Conv. Total (cfs)	21032.0	Conv. (cfs)		21032.0
Length wtd. (ft)	200.00	wetted Per. (ft)		252.76
Min Ch El (ft)	7116.00	shear (lb/sq ft)		0.24

Alpha	1.00	KurieRoad.rep	Stream Power (lb/ft s)	285.00	0.00
0.00					
Frctn Loss (ft)	0.05		Cum volume (acre-ft)	0.00	17.49
C & E Loss (ft)	0.01		Cum SA (acres)	0.02	5.05

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
 This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 8

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7118.96	Element	Left OB	Channel
Right OB				
Vel Head (ft)	0.01	wt. n-val.		0.060
W.S. Elev (ft)	7118.96	Reach Len. (ft)	35.00	200.00
275.00				
Crit w.s. (ft)		Flow Area (sq ft)		1475.14
E.G. Slope (ft/ft)	0.000091	Area (sq ft)		1475.14
Q Total (cfs)	898.00	Flow (cfs)		898.00
Top width (ft)	356.98	Top width (ft)		356.98
Vel Total (ft/s)	0.61	Avg. Vel. (ft/s)		0.61
Max Chl Dpth (ft)	4.96	Hydr. Depth (ft)		4.13
Conv. Total (cfs)	93962.9	Conv. (cfs)		93962.9
Length wtd. (ft)	200.00	Wetted Per. (ft)		357.61
Min Ch El (ft)	7114.00	Shear (lb/sq ft)		0.02
Alpha	1.00	Stream Power (lb/ft s)	332.00	0.00
0.00				
Frctn Loss (ft)	0.02	Cum volume (acre-ft)	0.00	12.91
C & E Loss (ft)	0.00	Cum SA (acres)	0.02	3.65

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1                      RS: 6

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7118.94	Element	Left OB	Channel
Right OB Vel Head (ft)	0.01	wt. n-val.		0.060
W.S. Elev (ft)	7118.93	Reach Len. (ft)	150.00	150.00
105.00 Crit W.S. (ft)		Flow Area (sq ft)		1254.86
E.G. Slope (ft/ft)	0.000132	Area (sq ft)		1254.86
Q Total (cfs)	931.00	Flow (cfs)		931.00
Top width (ft)	297.10	Top width (ft)		297.10
Vel Total (ft/s)	0.74	Avg. Vel. (ft/s)		0.74
Max Chl Dpth (ft)	4.93	Hydr. Depth (ft)		4.22
Conv. Total (cfs)	81078.1	Conv. (cfs)		81078.1
Length wtd. (ft)	150.00	wetted Per. (ft)		297.78
Min Ch El (ft)	7114.00	Shear (lb/sq ft)		0.03
Alpha	1.00	Stream Power (lb/ft s)	374.00	0.00
0.00 Frctn Loss (ft)	0.02	Cum Volume (acre-ft)	0.00	6.64
C & E Loss (ft)	0.00	Cum SA (acres)	0.02	2.15

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 4.50

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7118.92	Element	Left OB	Channel
Right OB Vel Head (ft)	0.01	wt. n-val.		0.060
W.S. Elev (ft)	7118.92	Reach Len. (ft)	25.00	25.00
25.00 Crit W.S. (ft)		Flow Area (sq ft)		1498.20
E.G. Slope (ft/ft)	0.000094	Area (sq ft)		1498.20
Q Total (cfs)	931.00	Flow (cfs)		931.00
Top width (ft)	360.35	Top width (ft)		360.35
Vel Total (ft/s)	0.62	Avg. vel. (ft/s)		0.62
Max chl Dpth (ft)	4.92	Hydr. Depth (ft)		4.16

KurieRoad.rep

Conv. Total (cfs)	95859.8	Conv. (cfs)	95859.8
Length wtd. (ft)	25.00	Wetted Per. (ft)	360.77
Min Ch El (ft)	7114.00	Shear (lb/sq ft)	0.02
Alpha 0.00	1.00	Stream Power (lb/ft s)	475.00
Frctn Loss (ft)	0.01	Cum volume (acre-ft)	0.00
C & E Loss (ft)	0.06	Cum SA (acres)	0.02

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.  
 Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
 This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 4.25

CROSS SECTION OUTPUT Profile #PF 1

		Element	Left OB	Channel
E.G. Elev (ft)	7118.86			
Right OB Vel Head (ft)	0.60	Wt. n-Val.	0.060	0.060
W.S. Elev (ft)	7118.26	Reach Len. (ft)	25.00	25.00
25.00 Crit W.S. (ft)	7118.26	Flow Area (sq ft)	8.66	145.94
E.G. Slope (ft/ft)	0.038349	Area (sq ft)	8.66	145.94
Q Total (cfs)	931.00	Flow (cfs)	16.25	914.75
Top width (ft)	135.00	Top width (ft)	35.95	99.05
Vel Total (ft/s)	6.02	Avg. vel. (ft/s)	1.88	6.27
Max Chl Dpth (ft)	3.25	Hydr. Depth (ft)	0.24	1.47
Conv. Total (cfs)	4754.2	Conv. (cfs)	83.0	4671.2
Length wtd. (ft)	25.00	Wetted Per. (ft)	35.98	99.32
Min Ch El (ft)	7115.00	Shear (lb/sq ft)	0.58	3.52
Alpha 0.00	1.07	Stream Power (lb/ft s)	559.91	0.00
Frctn Loss (ft)	1.09	Cum Volume (acre-ft)	0.00	1.43
C & E Loss (ft)	0.01	Cum SA (acres)	0.01	0.88



Warning: The energy equation could not be balanced within the specified number of iterations. The program used critical depth for the water surface and continued on with the calculations.  
 Warning: Divided flow computed for this cross-section.  
 Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.  
 Warning: During the standard step iterations, when the assumed water surface was set equal to critical depth, the calculated water surface came back below critical depth. This indicates that there is not a valid subcritical answer. The program defaulted to critical depth.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 4

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7117.19	Element	Left OB	Channel
Right OB				
Vel Head (ft)	1.30	Wt. n-Val.		0.060
W.S. Elev (ft)	7115.89	Reach Len. (ft)	25.00	25.00
25.00				
Crit W.S. (ft)	7116.30	Flow Area (sq ft)		101.74
E.G. Slope (ft/ft)	0.124906	Area (sq ft)		101.74
Q Total (cfs)	931.00	Flow (cfs)		931.00
Top width (ft)	95.03	Top width (ft)		95.03
vel Total (ft/s)	9.15	Avg. vel. (ft/s)		9.15
Max Chl Dpth (ft)	2.39	Hydr. Depth (ft)		1.07
Conv. Total (cfs)	2634.3	Conv. (cfs)		2634.3
Length wtd. (ft)	25.00	Wetted Per. (ft)		95.17
Min Ch El (ft)	7113.50	Shear (lb/sq ft)		8.34
Alpha	1.00	Stream Power (lb/ft s)	646.00	0.00
0.00				
Frctn Loss (ft)	1.59	Cum volume (acre-ft)		1.36
C & E Loss (ft)	0.07	Cum SA (acres)		0.83

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.  
 Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.  
 This may indicate the need for additional cross sections.

KurieRoad.rep

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

Note: Program found supercritical flow starting at this cross section.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 3.75

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7110.85	Element	Left OB	channel
Right OB				
Vel Head (ft)	5.07	wt. n-Val.		0.060
W.S. Elev (ft)	7105.78	Reach Len. (ft)	95.00	75.00
20.00				
Crit W.S. (ft)	7106.86	Flow Area (sq ft)		51.50
E.G. Slope (ft/ft)	0.624543	Area (sq ft)		51.50
Q Total (cfs)	931.00	Flow (cfs)		931.00
Top width (ft)	57.86	Top width (ft)		57.86
Vel Total (ft/s)	18.08	Avg. Vel. (ft/s)		18.08
Max Chl Dpth (ft)	1.78	Hydr. Depth (ft)		0.89
Conv. Total (cfs)	1178.1	Conv. (cfs)		1178.1
Length wtd. (ft)	75.00	wetted Per. (ft)		58.02
Min Ch El (ft)	7104.00	Shear (lb/sq ft)		34.61
Alpha	1.00	Stream Power (lb/ft s)	593.00	0.00
0.00				
Frctn Loss (ft)	5.96	Cum Volume (acre-ft)		1.31
C & E Loss (ft)	0.38	Cum SA (acres)		0.78

Warning: The velocity head has changed by more than 0.5 ft (0.15 m). This may indicate the need for additional cross sections.  
 Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m). between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
 REACH: Reach-1 RS: 3

KurieRoad.rep

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7105.35	Element	Left OB	Channel
Right OB Vel Head (ft)	0.20	wt. n-val.		0.060
W.S. Elev (ft)	7105.15	Reach Len. (ft)	115.00	100.00
50.00 Crit w.s. (ft)	7104.02	Flow Area (sq ft)		259.97
E.G. slope (ft/ft)	0.006978	Area (sq ft)		259.97
Q Total (cfs)	931.00	Flow (cfs)		931.00
Top width (ft)	113.60	Top width (ft)		113.60
Vel Total (ft/s)	3.58	Avg. Vel. (ft/s)		3.58
Max Chl Dpth (ft)	3.15	Hydr. Depth (ft)		2.29
Conv. Total (cfs)	11144.9	Conv. (cfs)		11144.9
Length wtd. (ft)	100.00	wetted Per. (ft)		114.15
Min Ch El (ft)	7102.00	Shear (lb/sq ft)		0.99
Alpha	1.00	Stream Power (lb/ft s)	400.00	0.00
0.00 Frctn Loss (ft)	0.89	Cum Volume (acre-ft)		1.04
C & E Loss (ft)	0.00	Cum SA (acres)		0.64

Note: Hydraulic jump has occurred between this cross section and the previous upstream section.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1 RS: 2

CROSS SECTION OUTPUT Profile #PF 1

E.G. Elev (ft)	7104.46	Element	Left OB	Channel
Right OB Vel Head (ft)	0.23	wt. n-val.		0.060
W.S. Elev (ft)	7104.23	Reach Len. (ft)	95.00	100.00
90.00 Crit w.s. (ft)	7103.50	Flow Area (sq ft)		243.75
E.G. slope (ft/ft)	0.011767	Area (sq ft)		243.75
Q Total (cfs)	931.00	Flow (cfs)		931.00
Top width (ft)	143.54	Top width (ft)		143.54

KurieRoad.rep

Vel Total (ft/s)	3.82	Avg. Vel. (ft/s)	3.82
Max Chl Dpth (ft)	2.73	Hydr. Depth (ft)	1.70
Conv. Total (cfs)	8582.5	Conv. (cfs)	8582.5
Length wtd. (ft)	100.00	Wetted Per. (ft)	143.79
Min Ch El (ft)	7101.50	Shear (lb/sq ft)	1.25
Alpha 0.00	1.00	Stream Power (lb/ft s)	536.00
Frctn Loss (ft)	2.18	Cum Volume (acre-ft)	0.47
C & E Loss (ft)	0.03	Cum SA (acres)	0.34

Warning: The conveyance ratio (upstream conveyance divided by downstream conveyance) is less than 0.7 or greater than 1.4.

This may indicate the need for additional cross sections.

Warning: The energy loss was greater than 1.0 ft (0.3 m) between the current and previous cross section. This may indicate the need for additional cross sections.

CROSS SECTION

RIVER: RIVER-1  
REACH: Reach-1                      RS: 1

CROSS SECTION OUTPUT Profile #PF 1


E.G. Elev (ft)	7102.24	Element	Left 08	Channel
Right 08 Vel Head (ft)	0.53	wt. n-Val.		0.060
W.S. Elev (ft)	7101.70	Reach Len. (ft)		
Crit W.S. (ft)	7101.70	Flow Area (sq ft)		162.36
E.G. Slope (ft/ft)	0.052150	Area (sq ft)		162.36
Q Total (cfs)	953.00	Flow (cfs)		953.00
Top width (ft)	153.47	Top width (ft)		153.47
Vel Total (ft/s)	5.87	Avg. Vel. (ft/s)		5.87
Max Chl Dpth (ft)	1.30	Hydr. Depth (ft)		1.06
Conv. Total (cfs)	4173.2	Conv. (cfs)		4173.2
Length wtd. (ft)		Wetted Per. (ft)		153.56
Min Ch El (ft)	7100.40	Shear (lb/sq ft)		3.44
Alpha 0.00	1.00	Stream Power (lb/ft s)	550.00	0.00

## **11 Report Maps**

Offsite Drainage Basin Map  
Existing Condition Drainage Map  
Proposed Condition Drainage Map




# EAGLE RISING HYDROLOGY MAP (OFF-SITE)

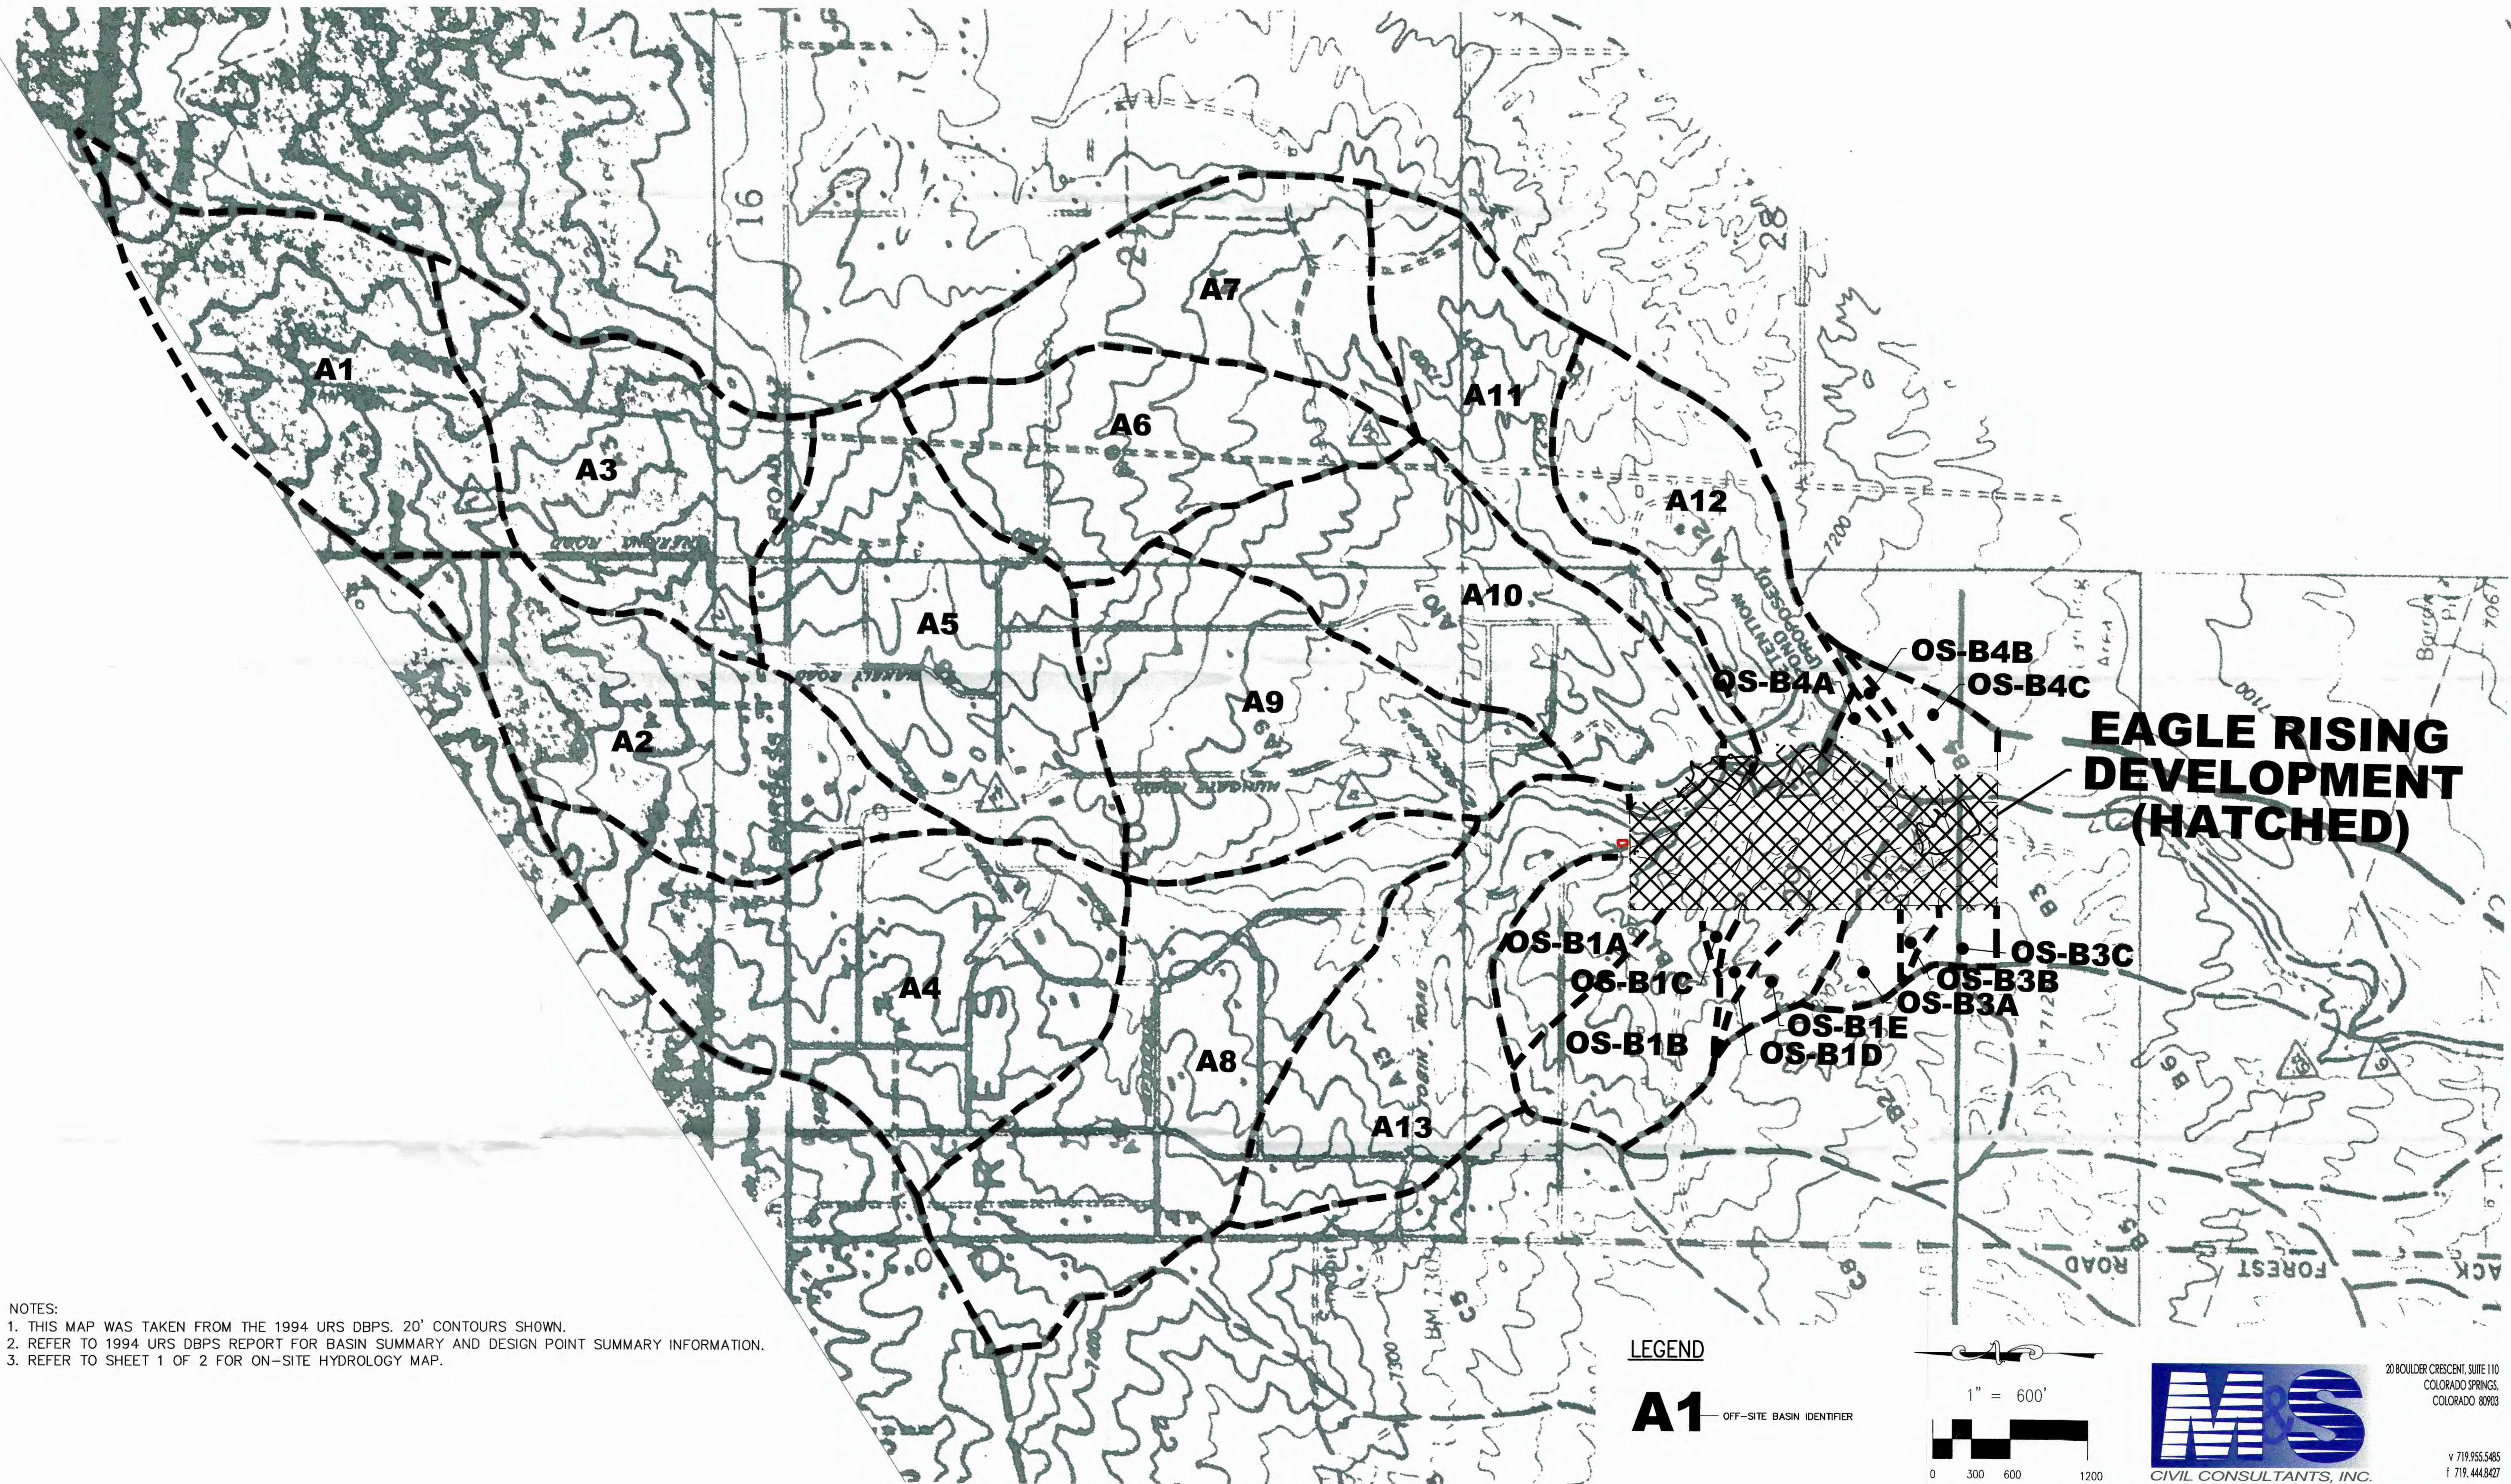

NOTES:  
 1. THIS MAP WAS TAKEN FROM THE 1994 URS DBPS. 20' CONTOURS SHOWN.  
 2. REFER TO 1994 URS DBPS REPORT FOR BASIN SUMMARY AND DESIGN POINT SUMMARY INFORMATION.  
 3. REFER TO SHEET 1 OF 2 FOR ON-SITE HYDROLOGY MAP.

**LEGEND**  
**A1** OFF-SITE BASIN IDENTIFIER

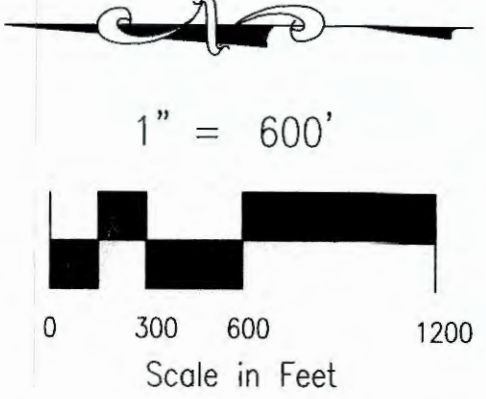



DATE: 02/10/2013  
 REV. DATE: 08/04/2015

20 BOULDER CRESCENT, SUITE 110  
 COLORADO SPRINGS,  
 COLORADO 80903

v 719.955.5485  
 f 719.444.8427



# EAGLE RISING HYDROLOGY MAP EXISTING (ON-SITE)

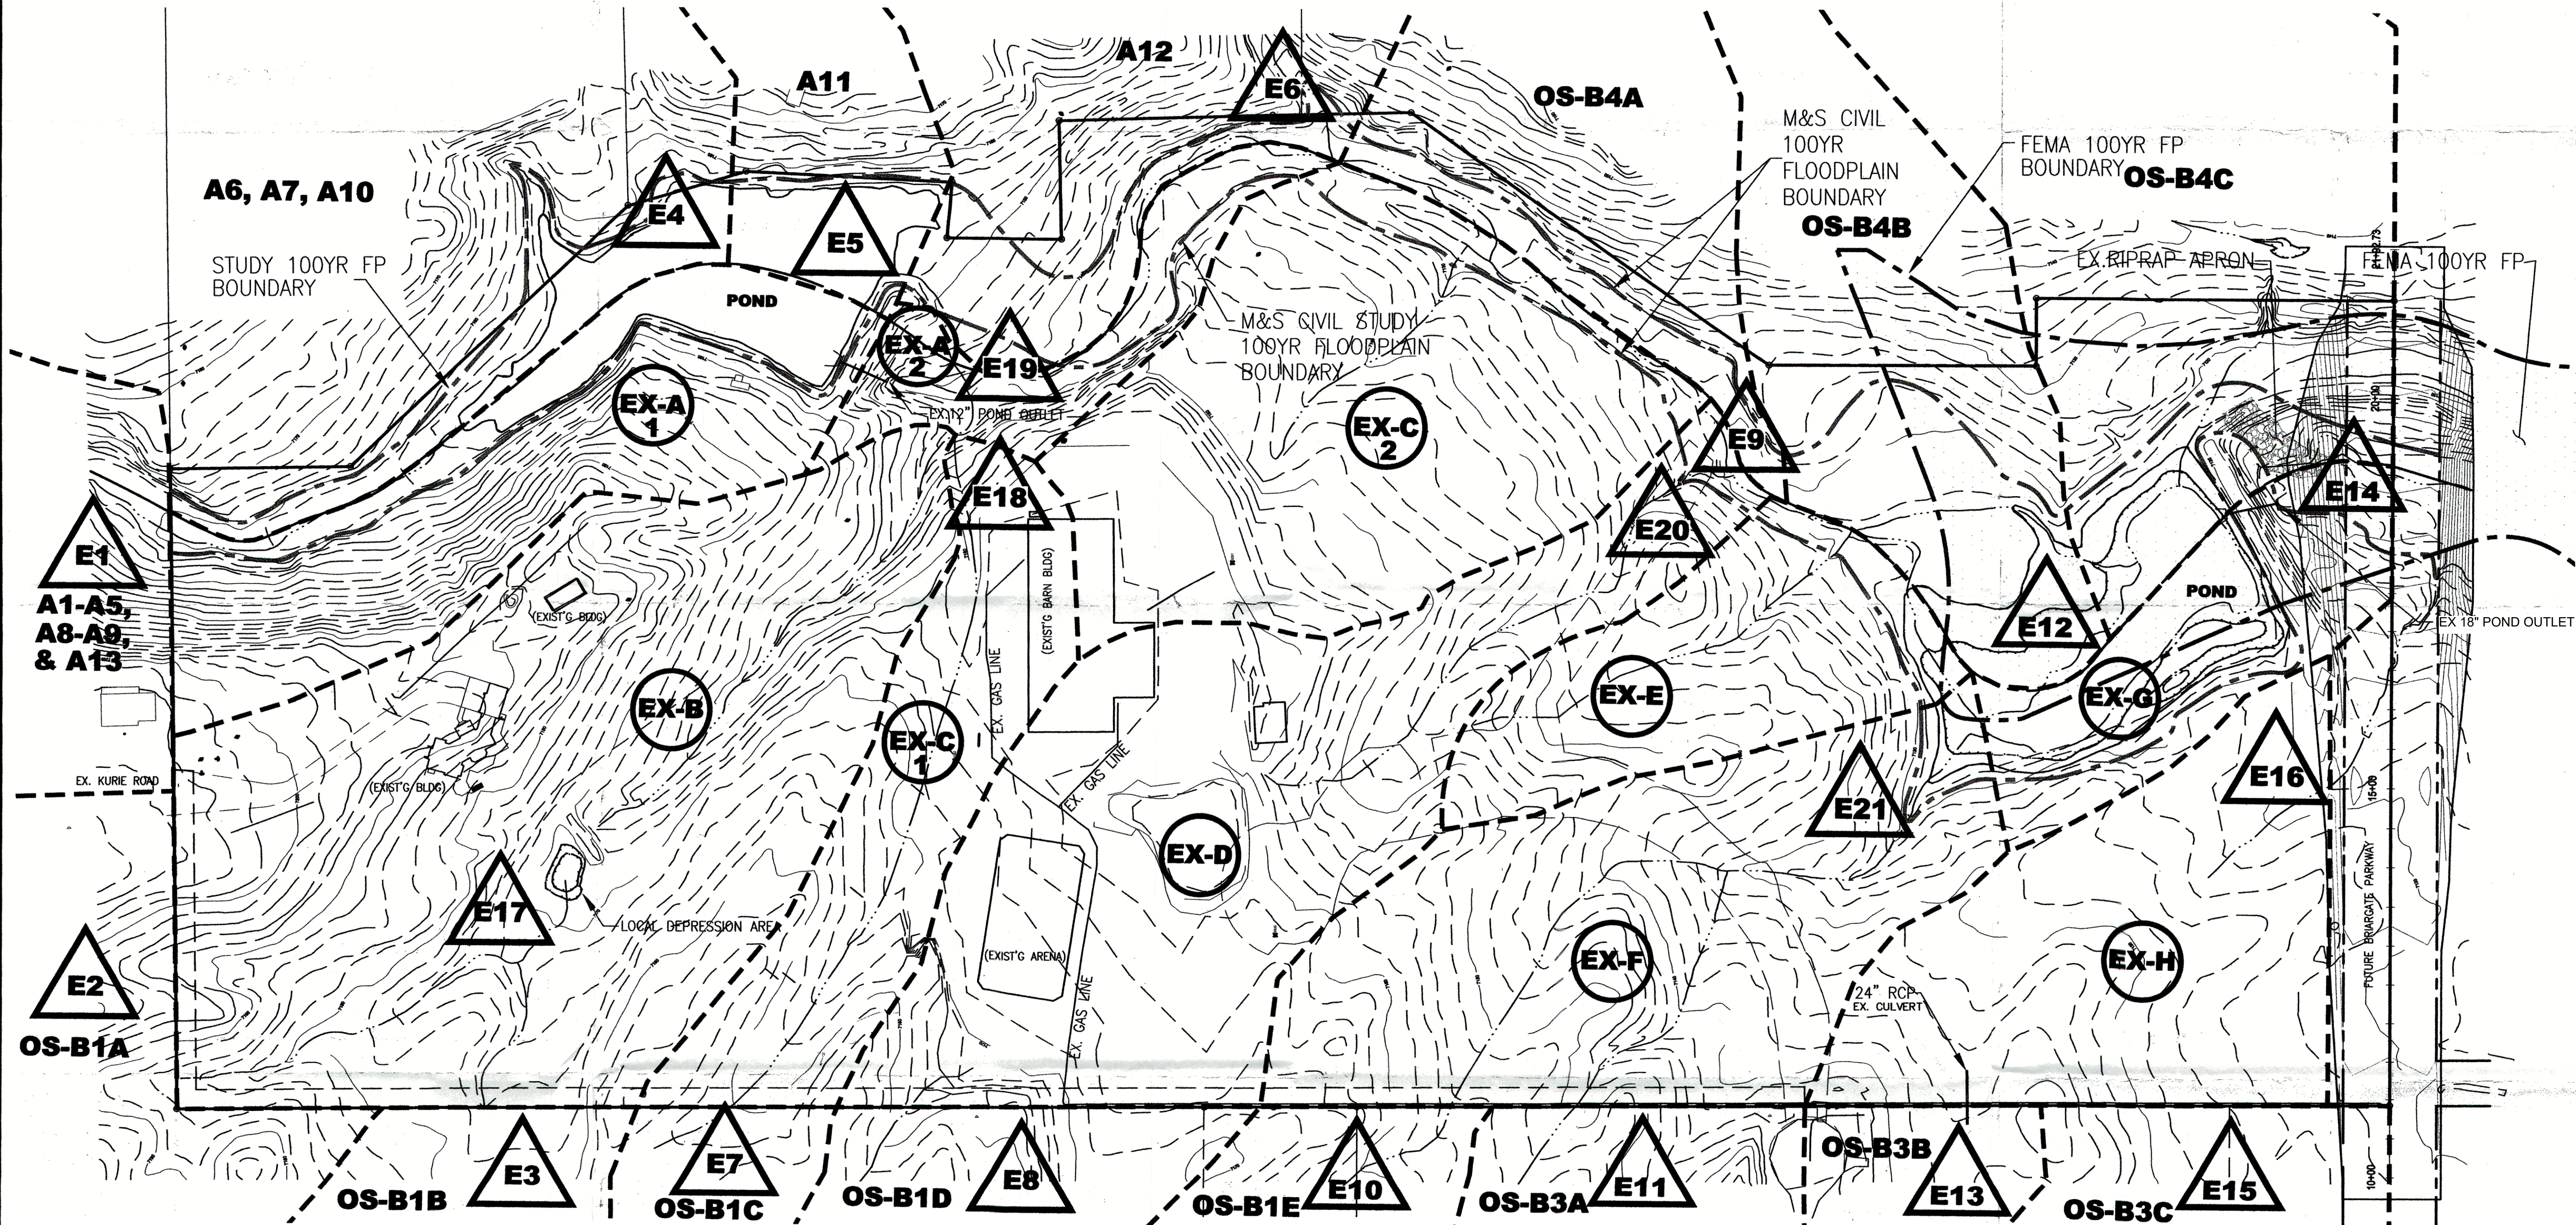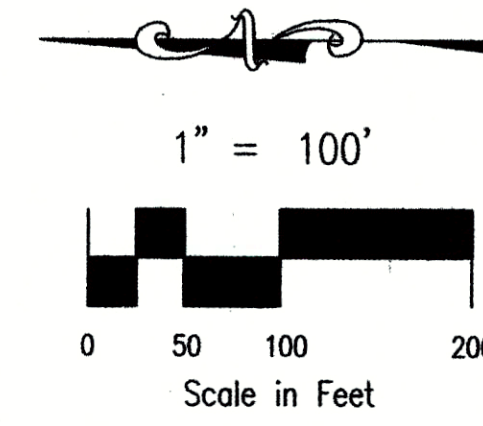

BASIN SUMMARY			
BASIN	AREA (ACRES)	Q5 (CPD)	Q100 (CPD)
EX-A1	4.9	5.9	13.9
EX-A2	1.6	1.9	4.6
EX-B	13.1	14.1	33.5
EX-C1	3.8	4.8	11.4
EX-C2	7.5	8.8	18.2
EX-D	9.0	8.0	19.0
EX-E	2.6	3.2	7.6
EX-F	7.5	7.4	17.5
EX-G	2.8	12.4	23.2
EX-H	5.3	5.0	12.0

BASIN SUMMARY			
BASIN	AREA (ACRES)	Q5 (CPD)	Q100 (CPD)
OS-B1A	24.9	24.2	57.4
OS-B1B	41.0	41.5	98.4
OS-B1C	1.8	1.7	4.0
OS-B1D	6.0	6.0	14.3
OS-B1E	10.1	10.1	24.0
OS-B3A	9.1	8.9	21.1
OS-B3B	2.3	2.1	5.1
OS-B3C	5.7	6.5	14.8
OS-B4A	5.2	5.9	14.1
OS-B4B	8.1	9.3	22.2
OS-B4C	13.4	12.7	30.1

BASIN SUMMARY			
BASIN	AREA (ACRES)	Q5 (CPD)	Q100 (CPD)
A1	120.6	45.5	81.0
A2	134.2	55.5	98.9
A3	103.9	42.3	75.3
A4	162.4	71.9	128.1
A5	134.2	56.4	100.4
A6	90.0	38.4	68.3
A7	87.4	36.1	64.3
A8	153.3	60.3	107.4
A9	128.0	54.7	97.4
A10	108.2	44.0	78.3
A11	76.1	35.7	63.6
A12	76.2	71.5	127.3
A13	102.9	42.6	75.8

DESIGN POINT SUMMARY			
DESIGN POINT	Q5 (CPD)	Q100 (CPD)	
E1	307.4	547.1	
E2	24.2	57.4	
E3	41.5	98.4	
E4	78.2	135.6	
E5	408.2	727.9	
E6	483.9	884.2	
E7	1.7	4.0	
E8	8.0	14.3	
E9	465.4	892.9	
E10	10.1	24.0	
E11	8.9	21.1	
E12	498.9	926.1	
E13	2.1	5.1	

DESIGN POINT SUMMARY			
DESIGN POINT	Q5 (CPD)	Q100 (CPD)	
E14	495.8	924.8	
E15	6.5	14.8	
E16	4.9	11.6	
E17	64.0	152.0	
E18	4.2	10.0	
E19	63.7	151.3	
E20	9.7	22.9	
E21	18.1	42.9	

### LEGEND

- ON-SITE BASIN IDENTIFIER
- DESIGN POINT
- FLOW ARROW
- FEMA 100-YR FLOODPLAIN (ZONE A)
- M&S CIVIL 100-YR FLOODPLAIN BOUNDARY



102 E. Pikes Peak Avenue, Suite 306  
 Colorado Springs, Colorado 80903  
 v 719.555.5485  
 f 719.444.8427  
 DATE: 2/7/2013  
 REV DATE: 7/12/2014  
 SHEET 1 OF 3




These are not negligible increases over historic. Detention needs to be addressed.

ON SITE DRAINAGE BASIN SUMMARY TABLE					
DESIGN POINT	INCLUDED BASINS	AREA (AC)	Tc (MIN)	RUNOFF	
				Q5	Q100
DP1	D	0.68	11.9	0.6	1.97
DP2	A, B, OS-B1A, OS-B1B	6.03	12.6	68.9	169.7
DP3	A, B, C, OS-B1A, OS-B1B	9.03	13.7	70.0	176.0
DP4	E	0.45	10.0	0.2	1.17
DP5	F, OS-B1C	3.78	12.0	4.7	14.7
DP6	H	3.51	14.0	3.6	10.48
DP7	G, OS-B1D	6.60	13.8	10.5	31.3
DP8	I, OS-B1E, OS-B3A	5.77	13.8	23.4	60.8
DP9	J, I, OS-B1E, OS-B3A	9.01	14.9	25.3	68.2
DP10	K, OS-B3B	2.22	12.3	3.7	11.2



OFF SITE DRAINAGE BASIN SUMMARY TABLE					
DATA FROM EAGLE RISING FILING NO. 1, FINAL DRAINAGE REPORT, AUGUST 2015 BY M&S CIVIL CONSULTANTS, INC.					
DESIGN POINT	INCLUDED BASINS	AREA (AC)	Tc (MIN)	RUNOFF	
				Q5	Q100
E2	OS-B1A	24.9	17.3	24.2	57.4
E3	OS-B1B	41.0	15.9	41.5	98.4
E7	OS-B1C	1.8	18.8	1.7	4.0
E8	OS-B1D	6.0	16.2	6.0	14.3
E10	OS-B1E	10.1	16.3	10.1	24.0
E11	OS-B3A	9.1	17.1	8.9	21.1
E13	OS-B3B	2.3	18.5	2.1	5.1
E15	OS-B3C	5.7	19.0	6.5	14.8
E4	A6, A7, A10		77.7	76.2	135.6
E5	E1, E4, EX-A1, A11, EX-A2, EX-C1		68.5	408.2	727.9
E6	E5, E2, EX-B, A12		69.6	493.9	884.2
E9	E6, E7, E8, EX-C2, EX-D, OS-B4A		71.7	485.4	892.9
E12	EX-G, EX-E, EX-F, E10, OS-B4B, E11		72.2	498.9	926.1
E14	E12, EX-G, E13, EX-H, OS-B4C		75.6	495.8	924.8
E1	A1, A2, A3, A4, A5, A8, A9, A13		66.4	307.4	541.1

**LEGEND**

- PROPERTY LINE
- EASEMENT LINE
- LOT LINE
- EXISTING
  - INDEX CONTOUR
  - INTERMEDIATE CONTOUR
- PROPOSED
  - INDEX CONTOUR
  - INTERMEDIATE CONTOUR
- BASIN BOUNDARY
- GENERAL FLOW/DIRECTION
- SLOPE DIRECTION AND GRADE
- BASIN LABEL
  - AREA IN ACRES
  - PERCENT IMPERVIOUS
- DESIGN POINT

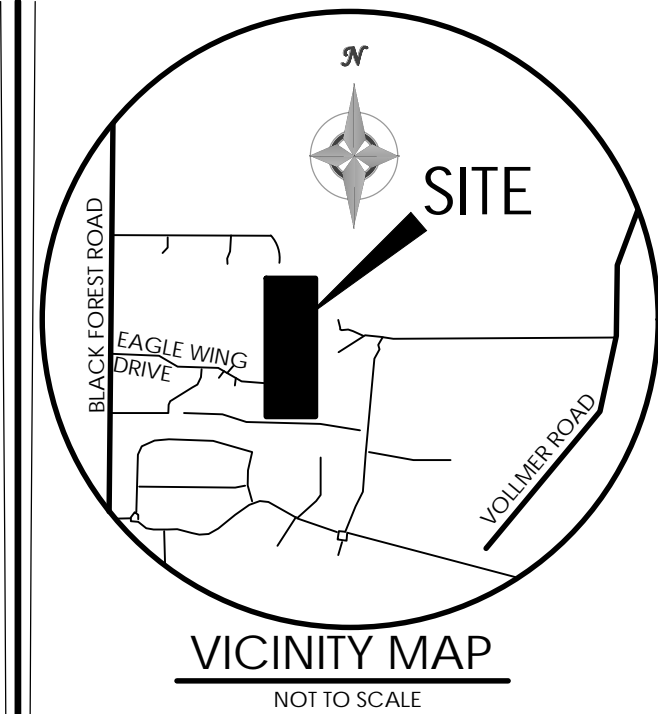

BENCHMARK

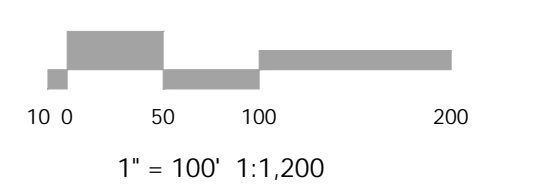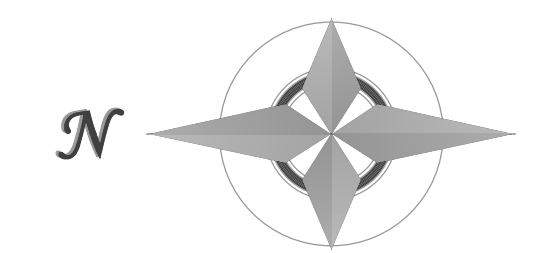

**MVE, INC.**  
ENGINEERS & SURVEYORS

1903 Library Street, Suite 200, Colorado Springs, CO 80909 719.635.5736

REVISIONS

DESIGNED BY \_\_\_\_\_  
DRAWN BY \_\_\_\_\_  
CHECKED BY \_\_\_\_\_  
AS-BUILT BY \_\_\_\_\_  
CHECKED BY \_\_\_\_\_

**EAGLE RISING**  
FILING NO. 1

**PROPOSED**  
DRAINAGE MAP

MVE PROJECT 61145  
MVE DRAWING DRN-MAP-PP

JULY 15, 2022  
SHEET 1 OF 1

what is this line?

