

Accepted for File

By: Daniel Torres, P.E.
Engineering Manager

Date: 06/29/2026 4:33:10 PM
El Paso County Department of Public Works
Development Services



LSC TRANSPORTATION CONSULTANTS, INC.

102 S. Tejon Street, Suite 1100

Colorado Springs, CO 80903

(719) 633-2868

FAX (719) 633-5430


E-mail: lsc@lsctrans.com

Website: <http://www.lsctrans.com>

**Fountain Valley School
Academic Center
Trip Generation/
Traffic Technical Memorandum
EPC PCD File No.: PPR2610
(LSC #S264080)
May 14, 2026**

Traffic Engineer's Statement

This traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.

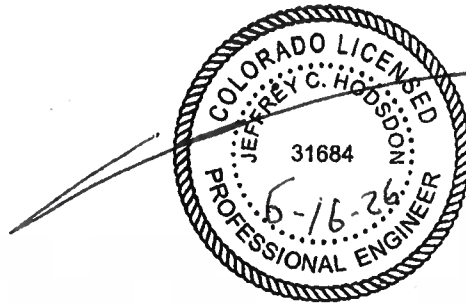

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

 **DAVID MOXO, CTO**

Name, Title:

Business Name: **Fountain Valley School**

Address: **6155 Fountain Valley School Rd
Colorado Springs, CO 80911**


Date: **6/17/26**



LSC TRANSPORTATION CONSULTANTS, INC.
102 S. Tejon Street, Suite 1100
Colorado Springs, CO 80903
(719) 633-2868
FAX (719) 633-5430
E-mail: lsc@lsctrans.com
Website: <http://www.lsctrans.com>

May 14, 2026

John Litchenberg
COO
Fountain Valley Schools
6155 Fountain Valley School Rd
Colorado Springs, CO 80911

RE: Fountain Valley School
Academic Center
El Paso County, CO
*Trip Generation/Traffic
Technical Memorandum*
EPC PCD File No. PPR2610

Dear Mr. Litchenberg:

In response to your request LSC Transportation Consultants, Inc., has prepared this *Trip Generation/Traffic Technical Memorandum* for the proposed Fountain Valley School Academic Center project in El Paso County Colorado. The school campus is located north of Fontaine Blvd. and east of Grinnell Blvd.

REPORT CONTENTS

A general overview of planned school improvements and details regarding the vehicular access to the school campus (no changes to the vehicular access are proposed with this project). The projected increase in the number of enrolled students, change in the number of faculty/staff, and information/details regarding the number of students and faculty currently residing on-campus and the anticipated residency on-campus following the project completion. Assessment of the anticipated change in trip generation compared to the previous traffic study considering the school-specific demographics related to vehicular travel demand. Current information/data regarding the existing area roadways, available traffic volume data and comparison to traffic volumes documented in the 2011 traffic study.

PRIOR TRAFFIC REPORT (TIS)

A previous traffic impact study was completed for school expansion. The previous report was prepared by LSC - dated April 20, 2011. That report anticipated growth in the school enrollment

from 250 students to 425 students with an estimate of daily traffic increase from 683 to 1161 vehicle trips per day. A copy of the 2011 TIS report is attached for reference.

LAND USE

General project information

Summary of Fountain Valley School Academic Center project:

- Project scope: two new campus buildings
- Anticipated impacts: The goal is to increase annual enrollment from 200 to 300 students

The proposed development project consists of the following: demolition of the existing administrative and classroom Buildings; demolition of existing site utilities; construction of a proposed 24,600 gsf humanities building; construction of a proposed 20,800 gsf STEM (Science, Technology, Engineering, and Math) building; construction of vehicular and pedestrian access within the existing campus core area; construction of utility infrastructure to support the proposed buildings and site improvements.

School Demographic Information Relative to Travel Demand

The school operations, enrollment, transportation services, employment, hours of operation and on campus residency information have been considered in this analysis. Table 1 presents the current and planned enrollment, faculty/staff, and campus residency information (IE boarding students vs. "day students" and faculty residing on campus vs. off campus and commuting.

Some notes/details:

- The school operates three bus routes.
- For day/commuter students **not** riding the bus, about 15-20 are student drivers. The remainder are dropped off and picked up by parents.
- For faculty/staff members living **on** campus, currently about 15 reside with someone. Nine of these 15 commute to work off campus and the remainder work from home.
- Currently, eleven students are also children of faculty members, and walk to school on campus.

Vehicular Access

Access to the school campus is on Grinnell Boulevard (primary access) and Goldfield Drive (secondary, gated/restricted access). No change to the campus access is proposed.

All employees and families have access to and use the "back gate". It automatically locks so the public, vendors, students, parents all use the front gate. Automated gate actuation data indicates an average of 72 per day using Goldfield access.

AREA ROADWAYS AND TRAFFIC VOLUMES

Area Roadways

Goldfield Drive is a paved, two-lane, “unimproved” roadway. It is classified as Rural Major Collector by the current MTCP.

Grinnell Boulevard is a four-lane, Urban Minor Arterial. This is a change from the 2011 TIS report. The adopted version of the MTCP at that time showed Grinnell Boulevard as a Principal Arterial.

Traffic Volumes

Grinnell Boulevard

Current Estimates Based on 2024 CDOT/MS2 Traffic Data:

The following current estimates of traffic volumes on Grinnell Boulevard north of Fontaine Boulevard are based on 2024 CDOT/MS2 Traffic Data.

- Weekday volume: 14,100 vehicles per day
- Peak hour volume count in vehicles per hour (vph) - northbound
 - AM Peak Hour: 485 vph
 - Mid-Afternoon School peak hour: 550 vph
 - PM Peak Hour: 550 vph
- Peak hour volume count in vehicles per hour (vph) - southbound
 - AM Peak Hour: 435 vph
 - Mid-Afternoon School peak hour: 450 vph
 - PM Peak Hour: 525 vph

Volumes From the 2011 TIS Report:

The following 2011 traffic volumes on Grinnell Boulevard north of Fontaine Boulevard have been included for comparison:

- Estimated weekday volume of 9,750 vehicles per day.
- Peak hour volume count in vehicles per hour (vph) - northbound
 - AM Peak Hour: 500 vph
 - Mid-Afternoon School peak hour: 400 vph
 - PM Peak Hour: 400 vph
- Peak hour volume count in vehicles per hour (vph) - southbound
 - AM Peak Hour: 355 vph
 - Mid-Afternoon School peak hour: 475 vph
 - PM Peak Hour: 525 vph

VEHICLE TRIP GENERATION

Table 2 shows the Trip Generation Estimate from the 2011 TIS.

Based on the information in Table 1, a reduction in trip generation is anticipated when compared to the base estimates and projections in the 2011 TIS. While the enrollment is projected to increase to 300, reductions in the numbers of day students and commuting faculty traveling to/from the school by private vehicle are shown. The currently proposed increase to 300 students would result in significantly fewer trips than the previously anticipated enrollment increase to 425 students. This is reflected in Table 1 in a qualitative summary of anticipated vehicular travel demand changes. The following two comparisons are presented:

- Currently Proposed Compared to Baseline/Existing Conditions in 2011 (from the 2011 TIS Report) (reflected in the 2011 counts and 2011 baseline trip generation in the TIS).
- Currently Proposed Compared to Proposed Future Scenario in 2011 TIS Report (basis for 2011 TIS future traffic impacts).

COUNTY ROAD IMPROVEMENT FEE PROGRAM

This project will be subject to El Paso County Roadway Improvement Impact Fees subject to the requirements of the program. As indicated in the EA meeting minutes, credit will be given for demo/removal existing buildings – IE fee calculation will be based on net new square footage of this “Institutional” land use.

* * * * *

Please contact me if you have any questions regarding this report.

Respectfully Submitted,

LSC TRANSPORTATION CONSULTANTS, INC.

By: Jeffrey C. Hodsdon, P.E.
Principal

JCH

Enclosures: Tables 1 and 2
2011 TIS Report

Table 1 School Demographics for Estimating Trip Generation Fountain Valley School	
--	--

	2011 TIS								2026 Currently Anticipated/Proposed							
									Current (2025/2026 School Yr.)				Anticipated Future (Post Expansion)			
													Total Anticipated Future	Future Anticipated to Live on	Commuters	
															Riding the	
															Total Future Anticipated	Future Anticipated to Live on Site
Living on Site	Riding the school bus															
Total	Site	Driving	school bus													
High School Students	250	165	26	60	335	235	100	200	140	15	45	300	210	20	70	
Middle School Students	0	0	0	0	90	0	90	0	0	0	0	0	0	0	0	
Faculty/Staff	103	47	56	N/A	122	68	54	100	55	45	N/A	115	55	50	N/A	

2026 Additional Notes:

Average daily attendance on a typical weekday

-----> About 2-4 kids absent on average daily (per the deans office)

Estimated number of campus visitors (admissions tours, deliveries, vendors, etc.)

-----> 468 people over 7 days = 67 people per day (per visitor aware, our visitor tracking software) I ran this on data from September of 2025. Recent but not since construction stuff started.

Special Events (for reference only, not relevant to average school-day impacts): Attendance for larger events (e.g., graduation or other major gatherings) These do not need to be exact—reasonable estimates are sufficient at this stage.

-----> We have two. Graduation and Reunion. Probably about 400/500 visitors the last two weeks of May. Graduation one Saturday and Reunion the next Saturday.

-----> About 2-4 kids absent on average daily (per the deans office)

-----> 468 people over 7 days = 67 people per day (per visitor aware, our visitor tracking software) I ran this on data from September of 2025. Recent but not since construction stuff started.

-----> We have two. Graduation and Reunion. Probably about 400/500 visitors the last two weeks of May. Graduation one Saturday and Reunion the next Saturday.

Table 2
Trip Generation
Fountain Valley School

Phase/Year	Land Use Description	Value	Units ¹	Trip Generation Rates ²							Total Trips Generated						
				Average Weekday	A.M. Peak Hour		School P.M. Peak Hour		P.M. Peak Hour		Average Weekday ³	A.M. Peak Hour ⁴		School P.M. Peak Hour ⁴		P.M. Peak Hour ⁴	
					In	Out	In	Out				In	Out	In	Out	In	Out
For Reference: Trip Generation Estimate from 2011 TIS																	
Existing 2011	Fountain Valley School	250	Students	2.73	0.20	0.06	0.10	0.18	0.10	0.15	683	49	16	25	45	24	38
Proposed in 2011	Fountain Valley School	425	Students	2.73	0.20	0.06	0.10	0.18	0.10	0.15	1,161	83	27	43	77	41	55

Summary of Anticipated Vehicular Travel Demand Changes (based on Table 1)

Current - 2026	Fountain Valley School	200	Students
Currently Proposed	Fountain Valley School	300	Students

Currently Proposed Compared to Baseline/Existing Conditions in 2011 (from the 2011 TIS Report) (reflected in the 2011 counts and 2011 baseline trip generation in the TIS)

School travel-demand/ "demographic" change

Change in number of students driving to Campus - day students/commuters
 Change in number of faculty/staff driving to Campus - commuting vs. living on campus
 Change in number of bus trips (resulting from change in the number of day students riding the bus)
 Change in the number of other trips by spouses and family members of Faculty
 Change in the number of other trips to/from the school as a function of change in the enrollment and faculty staff (general school size)
 (campus visitors such as admissions tours, deliveries, vendors, etc.)

Anticipated Vehicular Trip Generation Change

Decrease
Decrease
Likely no change, but possibly an increase by 1-2 bus trips.
Minor Increase
Potential Minor Increase

Overall

Decrease

Currently Proposed Compared to Proposed Future Scenario in 2011 TIS Report (basis for 2011 TIS future traffic impacts)

School travel-demand/"demographic" change

Change in number of students driving to Campus - day students/commuters
 Change in number of faculty/staff driving to Campus - commuting vs. living on campus
 Change in number of Middle School Trips Generated
 Change in number of bus trips (resulting from change in the number of day students riding the bus)
 Change in the number of other trips by spouses and family members of Faculty
 Change in the number of other trips to/from the school as a function of change in the enrollment and faculty staff (general school size)
 (campus visitors such as admissions tours, deliveries, vendors, etc.)

Anticipated Vehicular Trip Generation Difference

Decrease
Decrease
Decrease to zero - No Middle school currently proposed
Likely no change, but possibly an increase by 1-2 bus trips.
Minor decrease
Minor decrease

Overall

Decrease

April 20, 2011

Mr. Wayne M. Timura, P.E.
Next Level Development, Inc.
118 North Tejon Street, Suite 205
Colorado Springs, Colorado 80903

RE: Fountain Valley School
Traffic Impact Analysis
LSC #104330

Dear Mr. Timura:

In response to your request, LSC Transportation Consultants, Inc. (LSC) has prepared this traffic impact analysis for the proposed expansion of the Fountain Valley School. As shown on Figure 1, the school campus is located north of Fontaine Boulevard and east of Grinnell Boulevard in El Paso County, Colorado.

REPORT CONTENTS

This report is being prepared for submittal to El Paso County. The report includes: the existing street and traffic conditions in the vicinity of the site, the proposed expansion plan, the projected increase in trip generation, and level of service analyses for the short term and long term at the site access on Grinnell Boulevard for typical weekday school operation. An appendix figure has been included to show that the expansion of the site will have less than a ten percent impact at the nearest major off-site intersections to the north and south along Grinnell Boulevard.

SITE DEVELOPMENT AND LAND USE

The Fountain Valley School currently consists of 250 high school students (165 of whom live on-site) and 103 faculty/staff (47 of whom live on-site). The proposed expansion of the school would allow for up to 335 high school students (235 living on-site), 90 middle school students (none living on-site and 90 day students), and 122 faculty/staff (68 living on-site). The expansion would include the addition of classroom space, a fitness center, athletic facilities (including a possible ice arena), a performing arts center, administration space, student dormitories, and faculty housing. Currently, the school provides bus service for the 85 day students. About 70 percent of day students utilize the bus service. The bus service would be expanded to serve, as much as possible, the planned new middle school day students.

The school has an existing access on Grinnell Boulevard located approximately 3,000 feet north of Fontaine Boulevard that aligns with Crandall Drive. There is also an emergency-only access on Goldfield Drive. No additional access points are proposed as part of the expansion plan.

STREET AND TRAFFIC CONDITIONS

Area Streets

The key streets in the vicinity of the site are shown on Figure 1 and are described below.

- **Grinnell Boulevard** is shown on the *El Paso County 2030 Major Transportation Corridors Plan* and the *Preserved Corridor Network* as a four-lane Principal Arterial extending south from Powers Boulevard to Fontaine Boulevard. In the vicinity of Fountain Valley School Road, Grinnell Boulevard is a four-lane median-divided street with a posted speed limit of 50 miles per hour (mph).
- **Fountain Valley School Road** is a 26- to 30-foot-wide roadway extending east from Grinnell Boulevard and serving as the access for Fountain Valley School. The posted speed limit is 25 mph. It aligns with Crandall Drive at Grinnell Boulevard, creating a four-leg, two-way stop-sign-controlled intersection.
- **Crandall Drive** is a 36-foot-wide residential street extending west from Grinnell Boulevard to Crawford Avenue. It has a posted speed limit of 30 mph.

Existing Traffic Conditions

Figure 2 shows the existing peak-hour traffic volumes at the Grinnell Boulevard/Fountain Valley School Road intersection and the average daily traffic volume on Fountain Valley School Road. The traffic volumes are from traffic counts conducted by LSC in May 2010. The traffic count reports are attached. Figure 2 also shows estimates of the current average weekday traffic based on the peak-hour counts as well as a 2007 count on Grinnell by El Paso County.

Existing Levels of Service

Level of service (LOS) is a quantitative measure of the level of congestion or delay at an intersection. Level of service is indicated on a scale from "A" to "F." LOS A is indicative of very little congestion or delay. LOS F is indicative of a high level of congestion or delay. Attached is a more detailed description of levels of service.

The Grinnell Boulevard/Fountain Valley School Road intersection was analyzed to determine the existing levels of service based on the unsignalized method of analysis procedures found in the *Highway Capacity Manual, 2000 Edition* by the Transportation Research Board. Figure 3 shows the level of service analysis results. The level of service reports are attached

TRIP GENERATION

The estimated traffic volumes expected to be generated by the site after the proposed expansion were based on the existing trip generation and the anticipated/planned potential growth in the student population. Table 1 shows the existing trip generation of the school based on the traffic counts at the site access. The table also shows the estimated future trip generation of the school assuming the student enrollment reaches the new capacity of 425 students. The future trip generation was calculated by increasing the existing trip generation by the ratio at which the student population is expected to increase, or 70 percent. Although the percentage of students living off-site will increase from 34 percent to 45 percent, the percentage of faculty/staff living off-site will decrease from 54 percent to 44 percent and the total percentage of students bussed to school is expected to increase in the future, as most of the new middle school students will potentially be bussed, whereas some of the high school students drive themselves to school. Also, with additional grade levels being offered, it is more likely that for those families driving day students, there will be some level of increased trip reduction associated with siblings attending Fountain Valley School—for example, a middle school student and a high school student from the same family.

After expansion, the school is projected to generate about 1,160 vehicle-trips on the average week-day, with about half of the vehicles entering and half of the vehicles exiting the site during a 24-hour period. During the morning peak hour, which typically occurs for one hour between 6:30 and 8:30 a.m., about 85 vehicles would enter and 25 vehicles would exit the site. During the mid-afternoon peak hour, which was shown to occur between about 3:00 and 4:00 p.m., about 45 vehicles would enter and 75 vehicles would exit the site. During the afternoon peak hour, which typically occurs for one hour between 4:15 and 6:15 p.m., about 40 vehicles would enter and 65 vehicles would exit the site.

2018 TOTAL TRAFFIC

Figure 3 shows the projected 2018 total traffic volumes assuming full enrollment of 425 students. Although the full increase in student enrollment is unlikely to occur in only eight years, the year 2018 was chosen as the short-term horizon in order to analyze the impacts of the proposed expansion in the short term. The full growth in student enrollment could take as long as 20 to 25 years. The 2018 total traffic volumes at Grinnell/Fountain Valley School were developed by increasing the existing traffic volumes on the east leg of the intersection by 70 percent and increasing the existing through traffic (background traffic) on Grinnell Boulevard by two percent per year.

2035 TOTAL TRAFFIC

Figure 4 shows the total traffic volumes for the year 2035. The 2035 total traffic volumes at Grinnell/Fountain Valley School were developed by increasing the existing traffic volumes on the east leg of the intersection by 70 percent and increasing the existing through traffic on Grinnell Boulevard by two percent per year.

PROJECTED LEVELS OF SERVICE

The Grinnell Boulevard/Fountain Valley School Road intersection was analyzed to determine the projected levels of service for the 2018 and 2035 total traffic volumes based on the unsignalized method of analysis procedures found in the *Highway Capacity Manual, 2000 Edition* by the Transportation Research Board. Figures 3 and 4 show the level of service analysis results. The level of service reports are attached.

SIGNAL WARRANT ANALYSIS

A four-hour traffic signal warrant analysis was completed for the Grinnell Boulevard/Fountain Valley School Road intersection using the existing traffic volumes and the projected 2018 and 2035 total traffic volumes. The 70-percent factor was used because Grinnell Boulevard's 50 mph posted speed limit is above 40 mph.

Figure 5 shows the four-hour warrant chart. As shown in the figure, the four-hour traffic signal warrant is not currently met and is not projected to be met based on the 2018 and 2035 traffic volumes. Based on the traffic projections in this report, the expansion of the Fountain Valley School will not trigger the need for a signal at Grinnell Boulevard/Fountain Valley School Road.

CONCLUSIONS

Trip Generation

1. After expansion, the school is projected to generate about 1,160 vehicle-trips on the average weekday, with about half of the vehicles entering and half of the vehicles exiting the site during a 24-hour period. During the morning peak hour, about 85 vehicles would enter and 25 vehicles would exit the site. During the mid-afternoon peak hour, about 45 vehicles would enter and 75 vehicles would exit the site. During the afternoon peak hour, about 40 vehicles would enter and 65 vehicles would exit the site.

Projected Levels of Service

2. The Grinnell Boulevard/Fountain Valley School Road intersection is projected to operate at acceptable levels of service during the peak hours through the year 2035.

Auxiliary Turn Lanes

3. Based on the *El Paso County Engineering Criteria Manual*, the required length of the south-bound left-turn lane on Grinnell Boulevard approaching Fountain Valley School Road is 290 feet plus a 200-foot taper. The existing left-turn lane is 320 feet plus a 180-foot taper, which is adequate.

4. Based on the *El Paso County Engineering Criteria Manual* and the projected post-expansion site-generated traffic volumes, a northbound right-turn deceleration lane on Grinnell Boulevard approaching Fountain Valley School Road would be required by code. Although current traffic volumes do not meet the 25-vehicles-per-hour threshold for a right-turn deceleration lane, the ten-foot paved shoulder has been striped for a right-turn lane and the paved shoulder continues south of the striped turn-lane taper.
5. Based on the projected post-expansion site-generated westbound right-turning traffic volumes, the criteria contained in the *El Paso County Engineering Criteria Manual* indicate that a northbound right-turn acceleration lane would be required (in the future, once the peak-hour exiting right-turning traffic volume exceeds 50 vehicles per hour). Existing constraints on the east side of Grinnell Boulevard could make it difficult, if not infeasible, to widen Grinnell to accommodate a standard 12-foot northbound right-turn acceleration lane. There is a County storm water channel along the east side of Grinnell Boulevard. In my judgement, given the site-specific conditions, this acceleration lane would not be necessary and LSC would submit a County deviation request form to request the acceleration lane requirement be waived. It is our understanding that the submittal of this deviation request can be deferred until a later stage in the process.

* * * * *

We trust this traffic impact analysis will assist you in gaining approval of the proposed expansion of the Fountain Valley School. Please contact me if you have any questions or need further assistance.

Sincerely,

LSC TRANSPORTATION CONSULTANTS, INC.

By

Jeffrey C. Hodsdon, P.E., PTOE
Principal





JCH:EJL:bjwb


Enclosures: Table 1
Figures 1-5
Appendix Figure
Level of Service Definitions
Traffic Count Reports
Level of Service Reports

Table 1
Fountain Valley School
Trip Generation Estimates

Land Use Description	Trip Generation Units	Trip Generation Rates ⁽¹⁾						Total Trips Generated							
		Average Weekday Traffic		Morning Peak Hour		Mid-Afternoon Peak Hour		Average Weekday Traffic		Morning Peak Hour		Mid-Afternoon Peak Hour			
		In	Out	In	Out	In	Out	In	Out	In	Out	In	Out		
Current Enrollment															
Fountain Valley School	250 Students	2.73	0.20	0.06	0.10	0.18	0.10	0.15	683	49	16	25	45	24	38
Post-Expansion Enrollment															
Fountain Valley School	425 Students	2.73	0.20	0.06	0.10	0.18	0.10	0.15	1,161	83	27	43	77	41	65
Notes:															
(1) Trip generation rate source: traffic counts conducted by LSC at the Fountain Valley School access in May, 2010															
Source: LSC Transportation Consultants, Inc.															

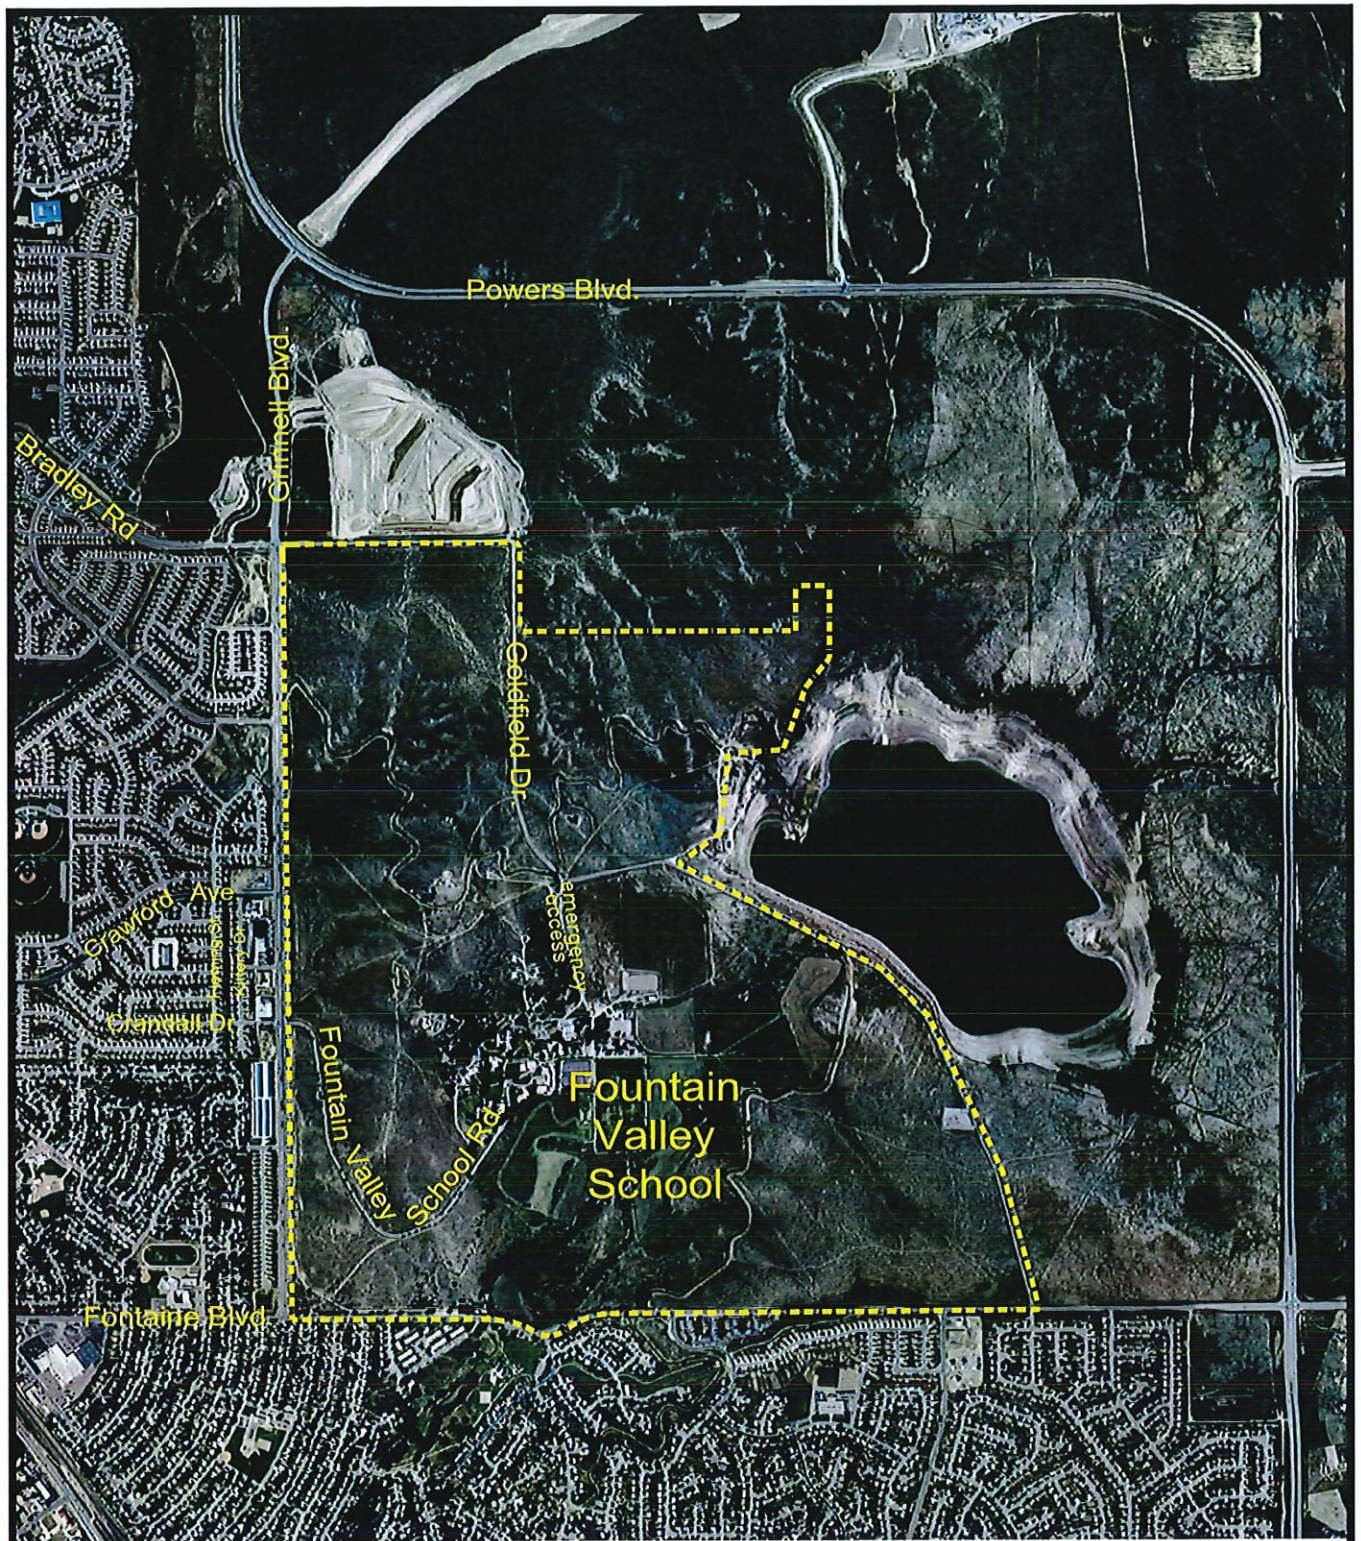

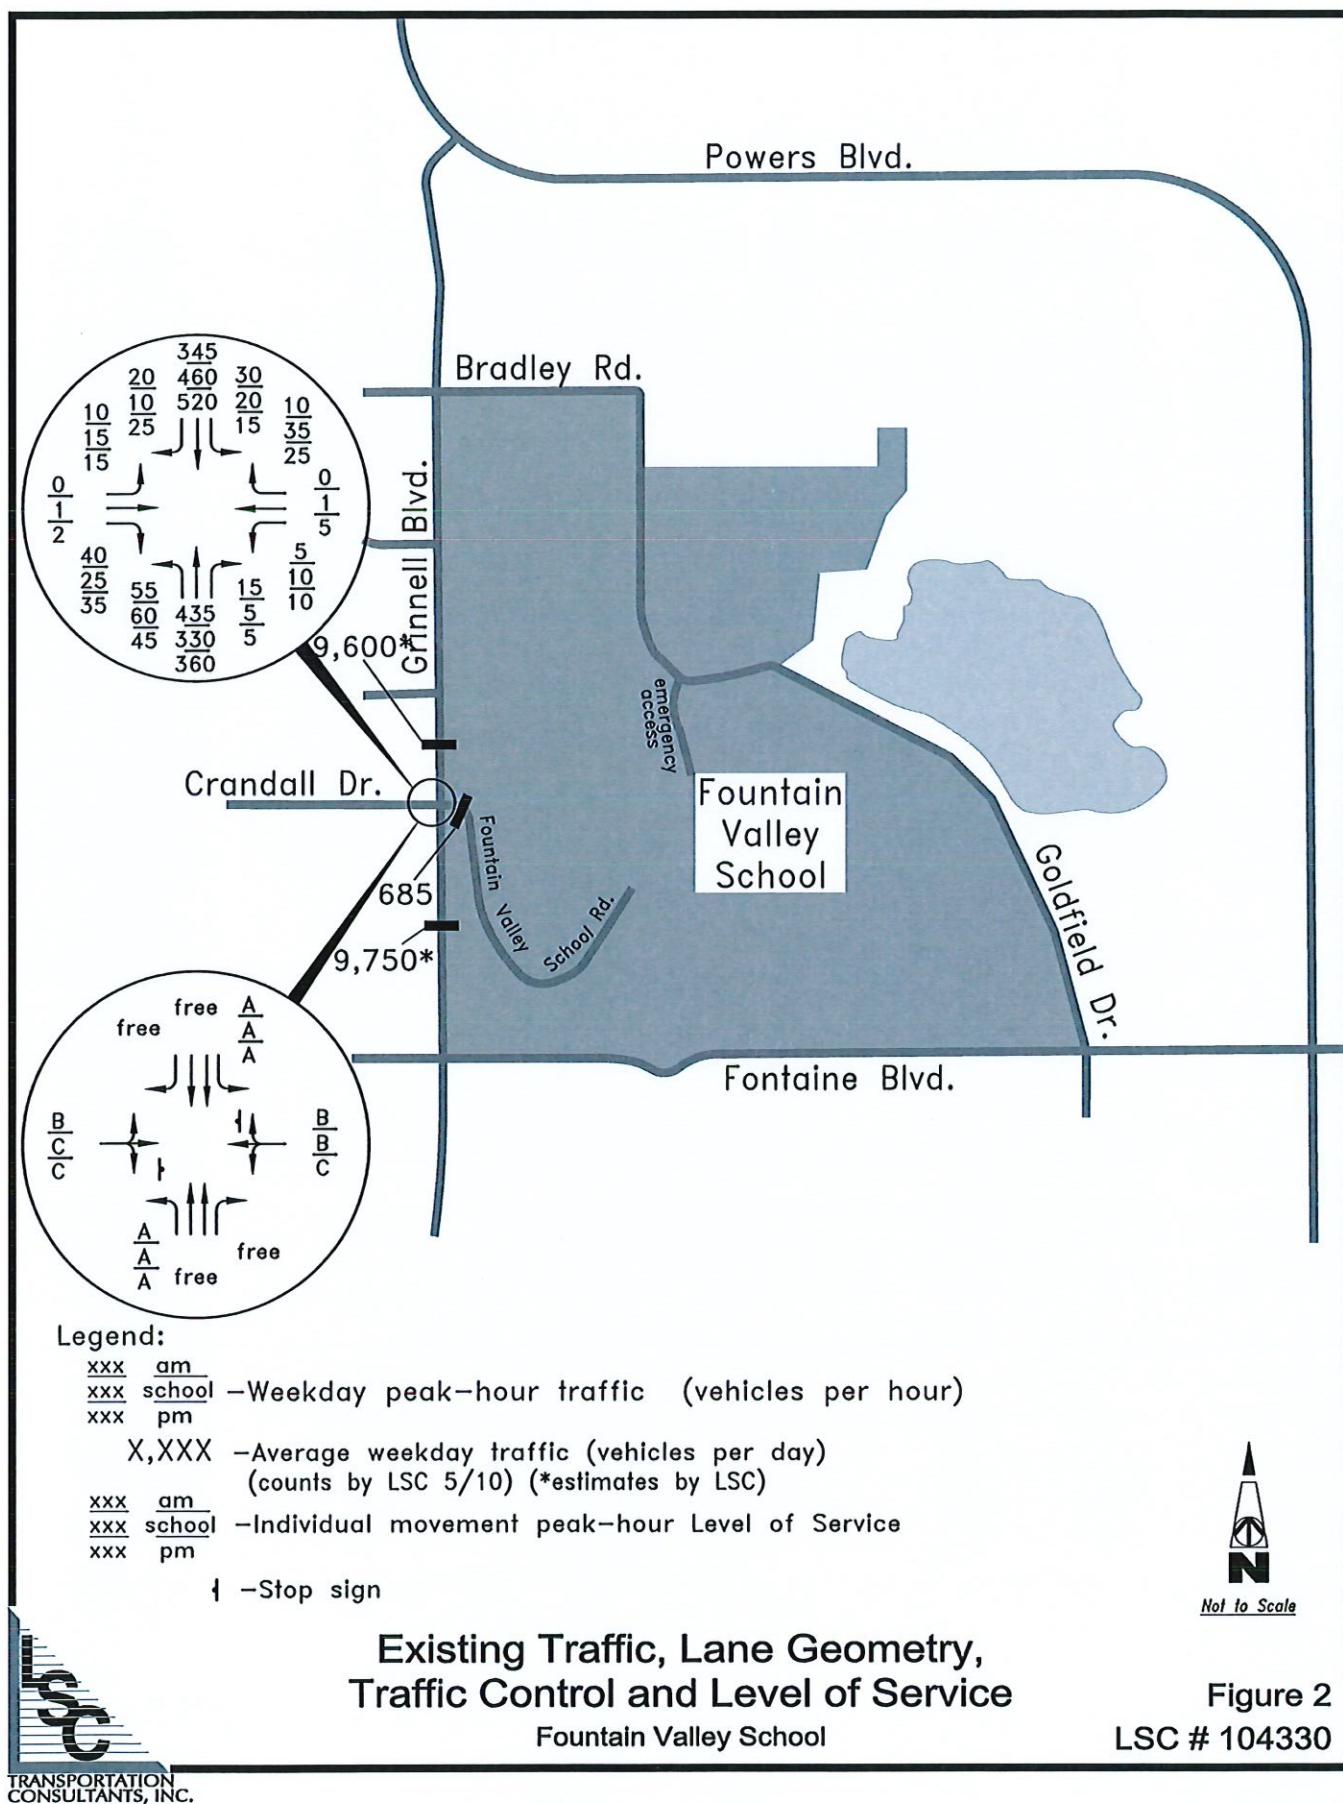

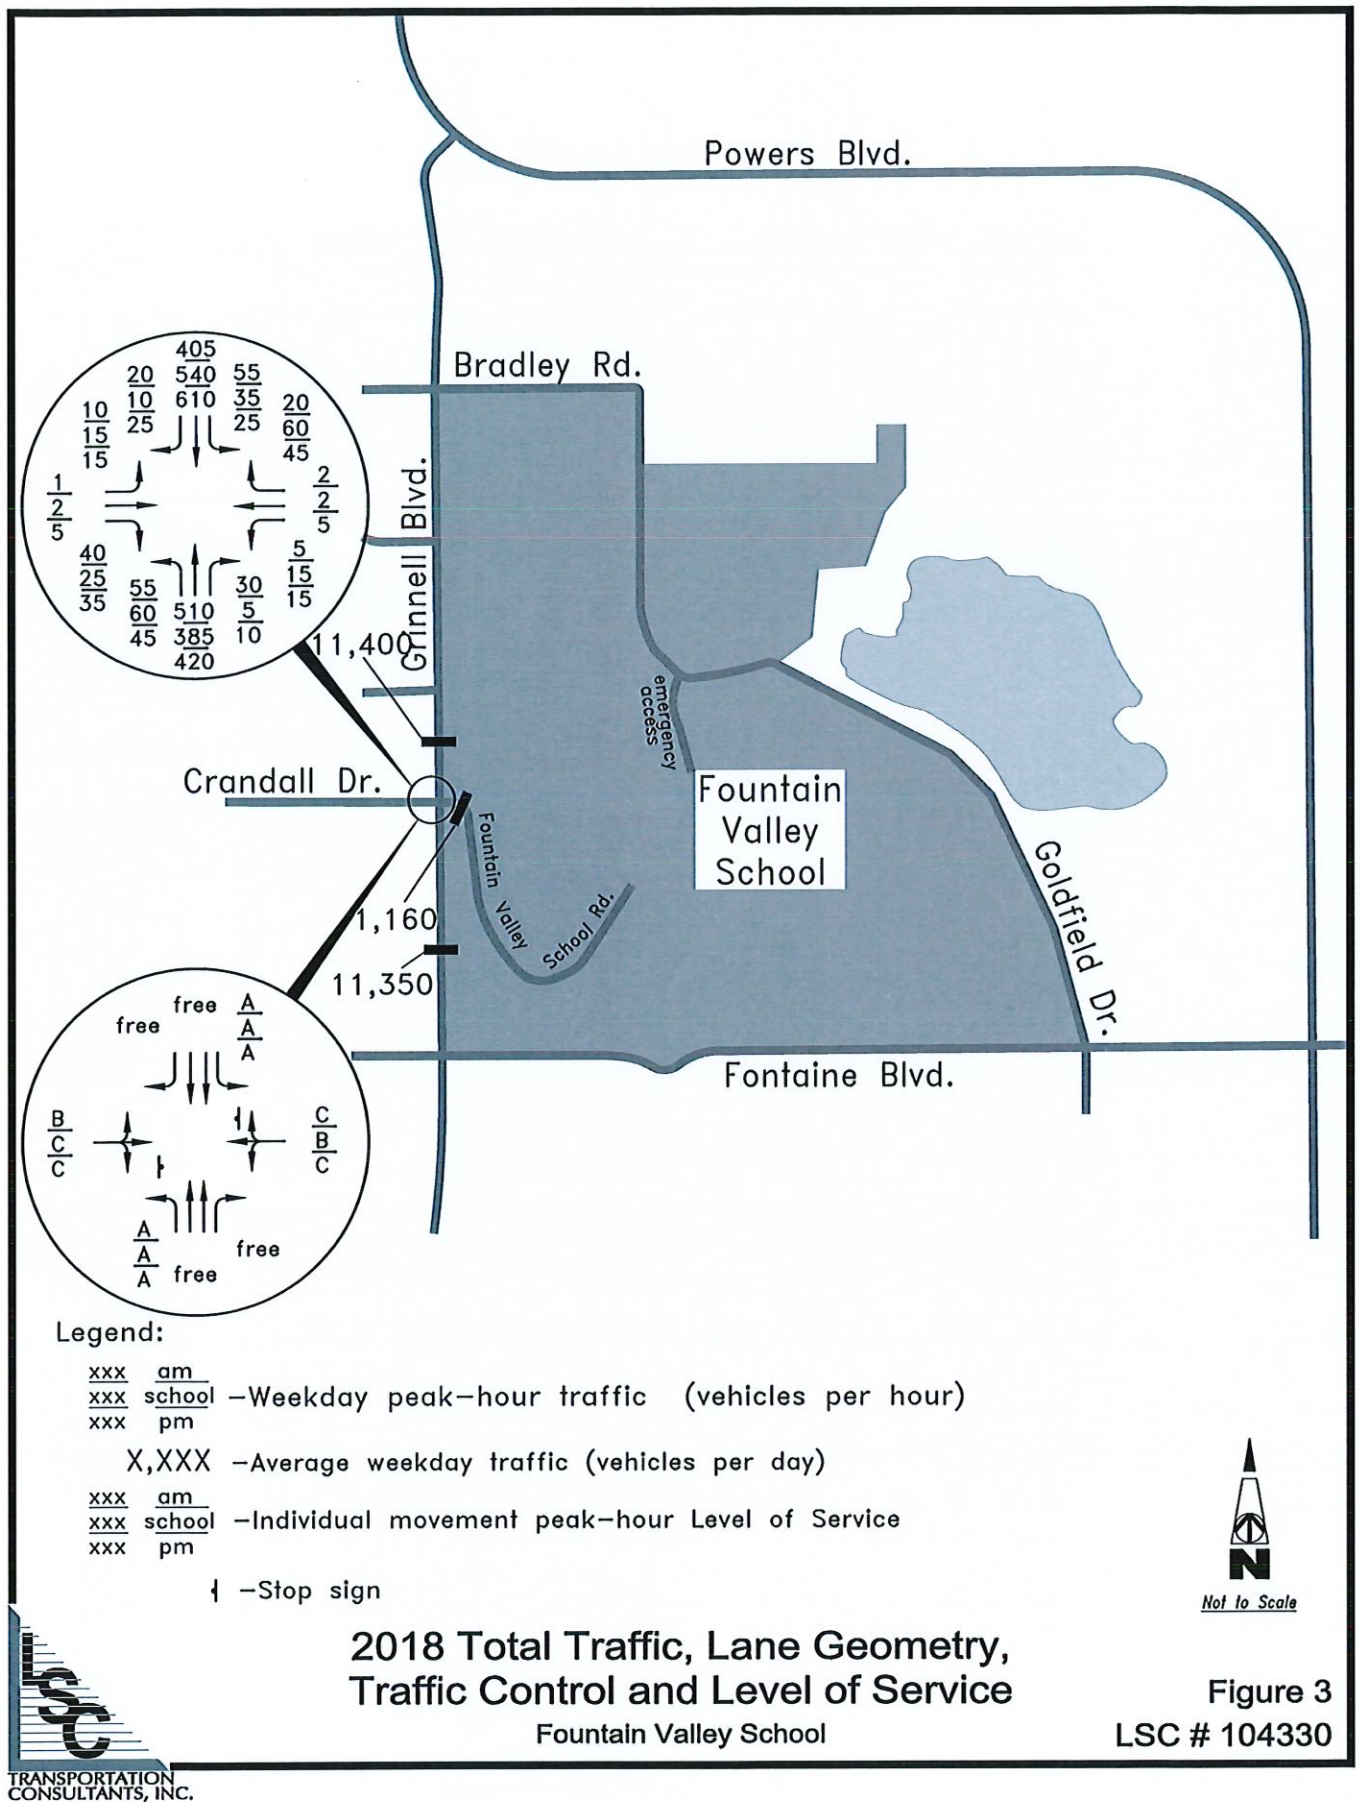


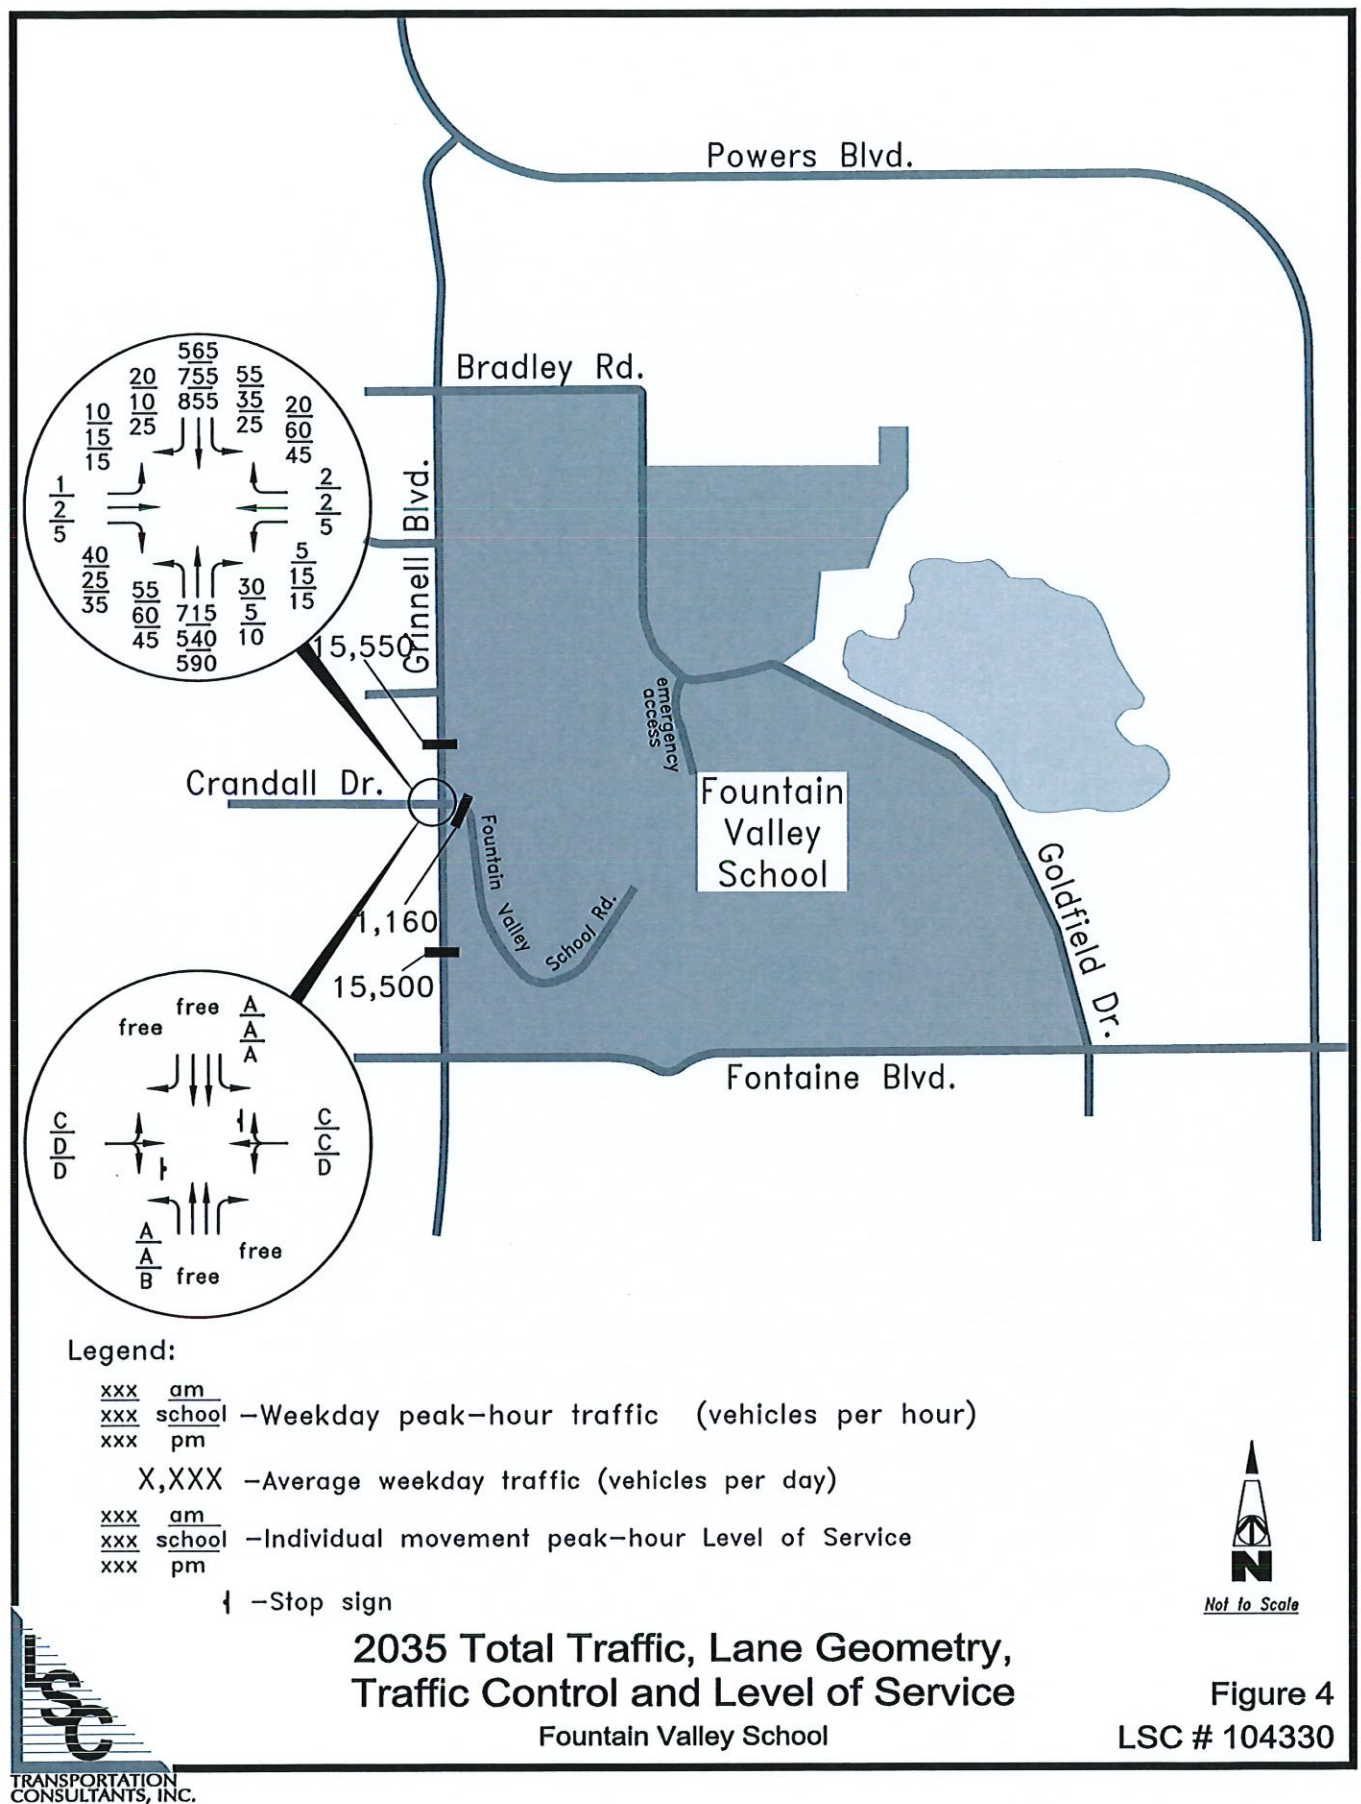


Figure 4C-2 Warrant 2, Four-Hour Vehicular Volume (70% Factor)
(COMMUNITY LESS THAN 10,000 POPULATION OR ABOVE 70 km/h (40mph) ON MAJOR STREET)

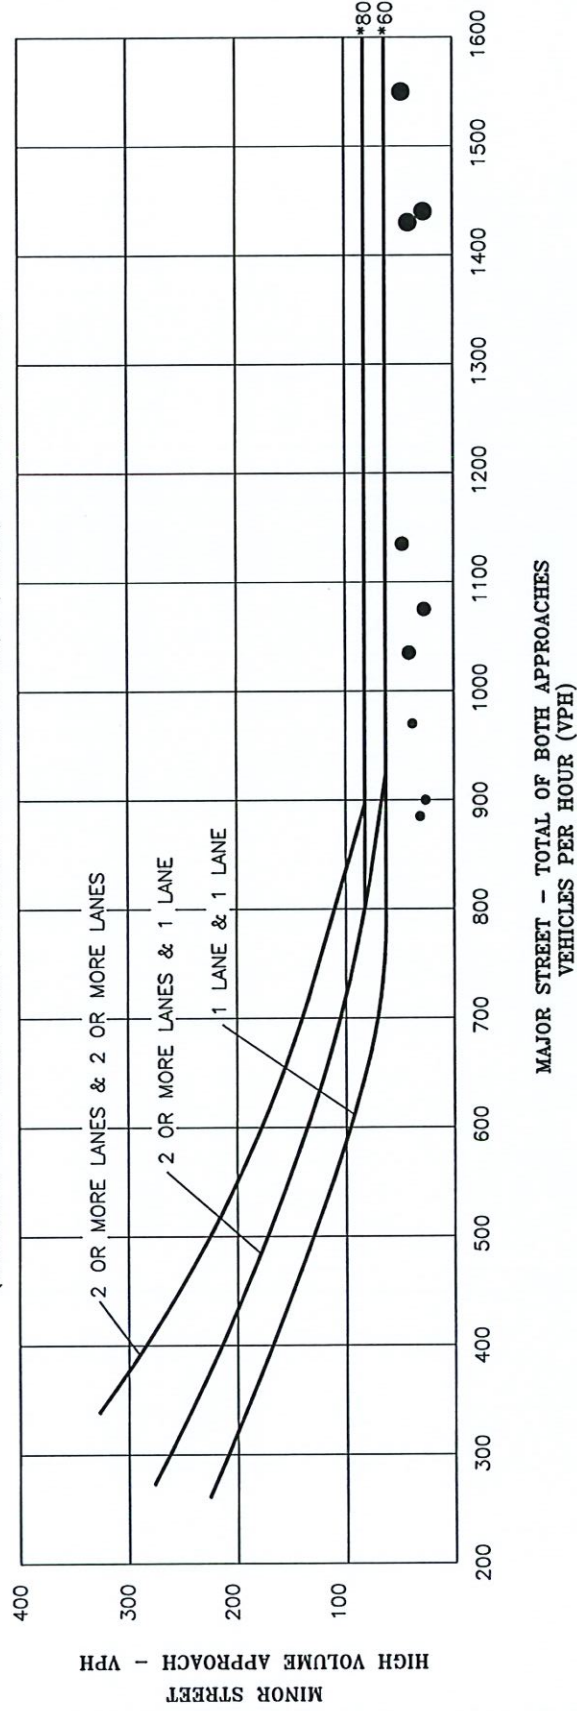


Grinnell Boulevard/Fountain Valley School Road Four-Hour Signal Warrant Chart

Fountain Valley School

Figure 5

LSC # 104330

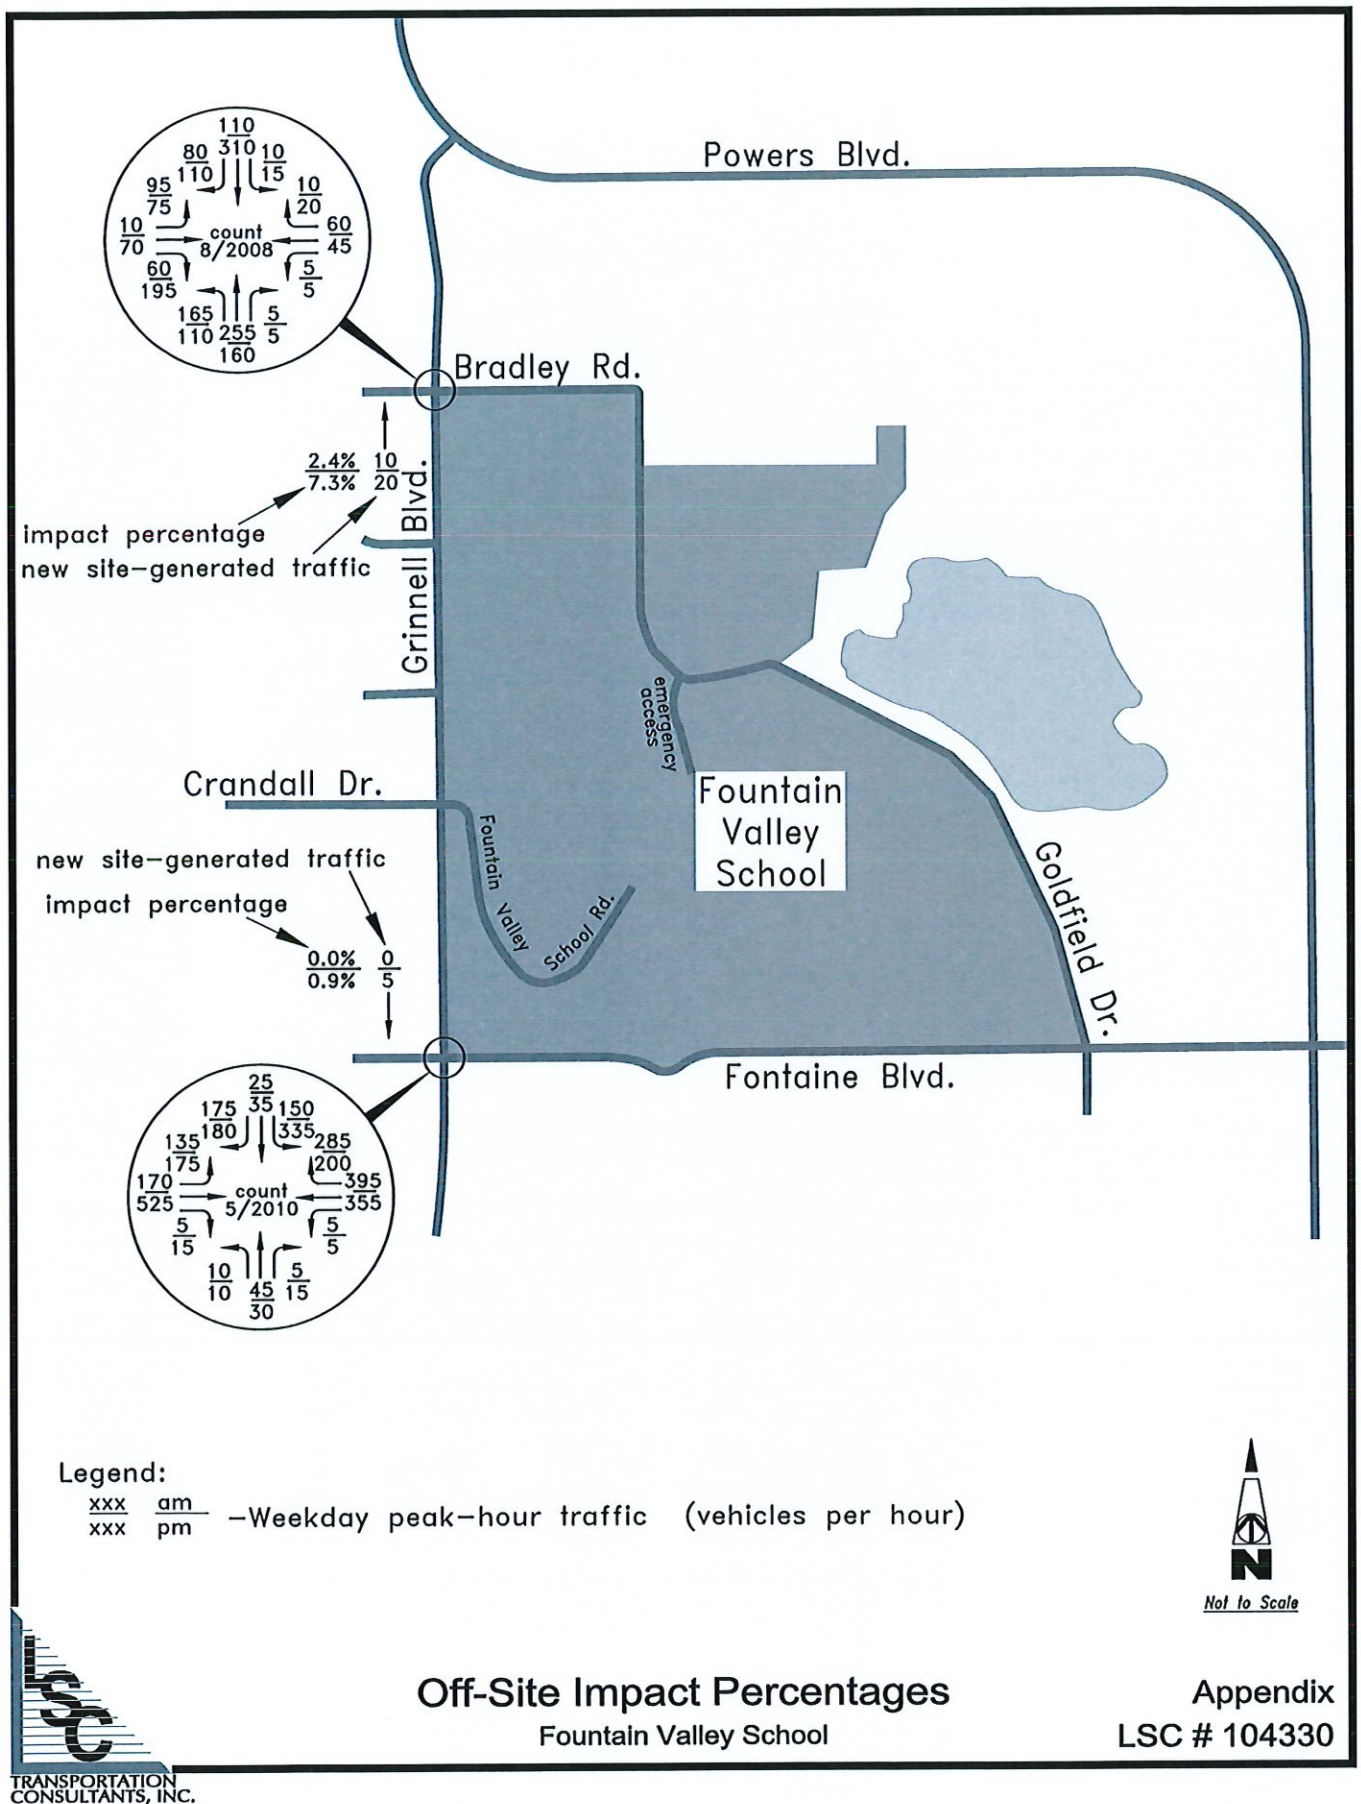

Off-Site Impact Percentages

Fountain Valley School

Appendix
LSC # 104330

Level of Service Definitions

The following descriptions have been adopted directly from the Transportation Research Board's *Highway Capacity Manual (HCM 2000)*, *Fourth Edition*. The methodologies used in the preceding report are consistent with the descriptions listed herein and within the original text.

Quality of service requires quantitative measures to characterize operational conditions within a traffic stream. Level of service (LOS) is a quality measure describing operational conditions within a traffic stream, generally in terms of such service measures as speed and travel time, freedom to maneuver, traffic interruptions, and comfort and convenience.

Six levels of service are defined for each type of facility that has analysis procedures available. Letters designate each level, from A to F, with LOS A representing the best operating conditions and LOS F the worst. Each level of service represents a range of operating conditions and the driver's perception of those conditions. Safety is not included in the measures that establish service levels.

SERVICE FLOW RATES

The analytical methods in the HCM 2000 attempt to establish or predict the maximum flow rate for various facilities at each level of service—except for LOS F, for which the flows are unstable or the vehicle delay is high. Thus, each facility has five service flow rates, one for each level of service (A through E). For LOS F, it is difficult to predict flow due to stop-and-start conditions.

The service flow rate is the maximum hourly rate at which persons or vehicles reasonably can be expected to traverse a point or uniform segment of a lane or roadway during a given period under prevailing roadway, traffic, and control conditions while maintaining a designated level of service. The service flow rates generally are based on a 15-minute period. Typically, the hourly service flow rate is defined as four times the peak 15-minute volume.

Note that service flow rates are discrete values, whereas levels of service represent a range of conditions. Because the service flow rates are the maximums for each level of service, they effectively define the flow boundaries between levels of service.

Most design or planning efforts typically use service flow rates at LOS C or D, to ensure an acceptable operating service for facility users.

SIGNALIZED INTERSECTIONS LEVEL OF SERVICE

The average control delay per vehicle is estimated for each lane group and aggregated for each approach and for the intersection as a whole. LOS is directly related to the control delay value. The criteria are listed in the following table.

Level of Service Criteria for Signalized Intersections	
Level of Service	Control Delay per Vehicle (Sec/Veh)
A	≤ 10
B	>10 - 20
C	>20 - 35
D	>35 - 55
E	>55 - 80
F	>80
Source: Highway Capacity Manual 2000, Exhibit 16-2.	

UNSIGNALIZED INTERSECTIONS LEVEL OF SERVICE

Level of service (LOS) for a TWSC intersection is determined by the computed or measure control delay and is defined for each minor movement. LOS is not defined for the intersection as a whole. LOS criteria are shown in the following table.

Level of Service Criteria for TWSC* Intersections	
Level of Service	Average Control Delay (Sec/Veh)
A	0 - 10
B	>10 - 15
C	>15 - 25
D	>25 - 35
E	>35 - 50
F	>50
*TWSC - Two-Way Stop Controlled	
Source: Highway Capacity Manual 2000, Exhibit 17-2.	

LSC Transportation Consultants, Inc.

516 N. Tejon St.

Colorado Springs, CO

(719) 633-2868

LSC Transportation Consultants, Inc.

File Name : Grinnell - Fontaine AM

Site Code : 00000000

Start Date : 05/13/2010

Page No : 1

Groups Printed- Unshifted

	Grinnell From North				Fontaine From East				Grinnell From South				Fontaine From West				Int. Total
Start Time	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	
Factor	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
06:45 AM	50	2	23	0	48	102	1	0	0	8	1	0	0	27	16	0	278
Total	50	2	23	0	48	102	1	0	0	8	1	0	0	27	16	0	278
07:00 AM	46	9	55	0	64	84	0	0	2	11	3	0	2	48	29	0	353
07:15 AM	46	7	26	0	71	114	2	0	1	20	2	0	1	48	42	0	380
07:30 AM	52	4	43	0	83	103	1	0	0	11	3	0	2	33	34	0	369
07:45 AM	29	5	26	0	68	94	0	0	0	4	2	0	2	40	28	0	298
Total	173	25	150	0	286	395	3	0	3	46	10	0	7	169	133	0	1400
08:00 AM	31	7	37	0	55	76	0	0	0	9	2	0	0	47	23	0	287
Grand Total	254	34	210	0	389	573	4	0	3	63	13	0	7	243	172	0	1965
Apprch %	51.0	6.8	42.2	0.0	40.3	59.3	0.4	0.0	3.8	79.7	16.5	0.0	1.7	57.6	40.8	0.0	
Total %	12.9	1.7	10.7	0.0	19.8	29.2	0.2	0.0	0.2	3.2	0.7	0.0	0.4	12.4	8.8	0.0	

LSC Transportation Consultants, Inc.

516 N. Tejon St.

Colorado Springs, CO

(719) 633-2868

LSC Transportation Consultants, Inc.

File Name : Grinnell - Fontaine PM

Site Code : 00000000

Start Date : 05/12/2010

Page No : 1

Groups Printed- Unshifted

	Grinnell From North				Fontaine From East				Grinnell From South				Fontaine From West				Int. Total
Start Time	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	
Factor	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
03:00 PM	21	6	76	0	46	81	0	0	1	10	2	0	2	112	33	0	390
03:15 PM	43	9	81	0	60	74	0	0	2	12	5	0	5	123	28	0	442
03:30 PM	27	5	72	0	52	68	6	0	5	14	3	0	3	101	41	0	397
03:45 PM	32	5	84	0	46	85	1	0	1	8	3	0	1	120	29	0	415
Total	123	25	313	0	204	308	7	0	9	44	13	0	11	456	131	0	1644
04:00 PM	37	5	77	0	54	69	1	0	2	4	1	0	1	114	40	0	405
04:15 PM	31	6	70	0	35	85	1	0	2	9	3	0	6	147	35	0	430
04:30 PM	37	6	84	0	36	77	2	0	5	9	1	0	3	132	34	0	426
04:45 PM	36	10	87	0	52	109	1	0	2	5	4	0	3	139	43	0	491
Total	141	27	318	0	177	340	5	0	11	27	9	0	13	532	152	0	1752
05:00 PM	52	7	74	0	59	95	0	0	4	8	3	0	3	120	49	0	474
05:15 PM	54	11	88	0	53	76	2	1	3	7	1	0	4	133	47	0	480
Grand Total	370	70	793	0	493	819	14	1	27	86	26	0	31	1241	379	0	4350
Apprch %	30.0	5.7	64.3	0.0	37.2	61.7	1.1	0.1	19.4	61.9	18.7	0.0	1.9	75.2	23.0	0.0	
Total %	8.5	1.6	18.2	0.0	11.3	18.8	0.3	0.0	0.6	2.0	0.6	0.0	0.7	28.5	8.7	0.0	

LSC Transportation Consultants, Inc.

516 N. Tejon St.

LSC Transportation Consultants, Inc.

Colorado Springs, CO Site Name : Grinnell - Fountain Valley School AM

(719) 633-2868

Site Code : 00051310

Start Date : 05/13/2010

Page No : 1

Groups Printed- Unshifted

	Grinnell From North				Fountain Valley School From East				Grinnell From South				Crandall From West				Int. Total
Start Time	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	
Factor	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
06:45 AM	0	13	2	0	0	0	0	0	1	17	0	0	3	0	1	0	37
06:50 AM	0	26	3	0	0	0	0	0	1	28	1	0	6	0	0	0	65
06:55 AM	0	23	2	0	0	0	0	0	0	19	1	0	1	0	0	0	46
Total	0	62	7	0	0	0	0	0	2	64	2	0	10	0	1	0	148
07:00 AM	1	27	1	0	1	0	0	0	0	24	1	0	3	0	0	0	58
07:05 AM	0	42	1	0	0	0	1	0	1	40	4	0	3	0	1	0	93
07:10 AM	0	32	0	0	1	0	0	0	0	33	6	0	3	0	2	0	77
07:15 AM	0	33	3	0	0	0	1	0	0	45	2	0	11	0	1	0	96
07:20 AM	1	33	2	0	2	0	0	0	1	38	9	0	6	0	1	0	93
07:25 AM	2	31	1	0	1	0	0	0	1	46	4	0	1	0	2	0	89
07:30 AM	0	22	2	0	2	0	0	0	4	37	5	0	3	0	1	0	76
07:35 AM	1	41	9	0	2	0	1	0	3	43	3	0	3	0	0	0	106
07:40 AM	5	27	1	0	0	0	0	0	2	33	6	0	1	0	0	0	75
07:45 AM	2	19	1	0	1	0	1	0	1	32	5	0	3	0	0	0	65
07:50 AM	5	11	5	0	0	0	0	0	2	34	7	0	2	0	0	0	66
07:55 AM	3	27	6	0	2	0	0	0	2	29	3	0	0	0	0	0	72
Total	20	345	32	0	12	0	4	0	17	434	55	0	39	0	8	0	966
08:00 AM	2	16	3	1	2	0	0	0	2	19	5	0	1	1	2	0	54
08:05 AM	3	29	1	0	0	0	1	0	1	19	5	0	0	0	2	0	61
08:10 AM	1	21	1	0	2	0	1	0	0	36	4	0	3	0	3	0	72
Grand Total	26	473	44	1	16	0	6	0	22	572	71	0	53	1	16	0	1301
Apprch %	4.8	86.9	8.1	0.2	72.7	0.0	27.3	0.0	3.3	86.0	10.7	0.0	75.7	1.4	22.9	0.0	
Total %	2.0	36.4	3.4	0.1	1.2	0.0	0.5	0.0	1.7	44.0	5.5	0.0	4.1	0.1	1.2	0.0	

LSC Transportation Consultants, Inc.

516 N. Tejon St.

LSC Transportation Consultants, Inc.

Colorado Springs, CO

(719) 633-2868

File Name : Grinnell - Fountain Valley School PM

Site Code : 00051210

Start Date : 05/12/2010

Page No : 1

Groups Printed- Unshifted

	Grinnell From North				Fountain Valley School From East				Grinnell From South				Crandall From West				Int. Total
Start Time	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	Right	Thru	Left	Peds	
Factor	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
03:00 PM	0	31	0	0	2	0	0	0	0	19	7	0	4	1	0	0	64
03:05 PM	3	36	0	0	3	0	1	0	0	29	9	0	1	0	1	0	83
03:10 PM	0	28	2	0	4	0	4	0	0	25	6	0	3	0	3	0	75
03:15 PM	2	47	3	0	0	0	0	0	0	29	3	0	4	0	2	0	90
03:20 PM	0	52	5	0	0	0	0	0	0	32	3	0	0	0	1	0	93
03:25 PM	0	38	0	0	2	0	0	0	1	23	5	0	1	0	2	0	72
03:30 PM	0	36	2	0	5	0	2	0	0	36	4	0	0	0	0	0	85
03:35 PM	3	31	1	0	7	0	0	0	1	29	4	0	3	0	2	0	81
03:40 PM	0	34	4	0	5	0	2	0	0	33	7	0	2	0	0	0	87
03:45 PM	1	29	1	0	4	0	0	0	0	28	5	0	4	0	1	0	73
03:50 PM	2	53	0	0	2	1	0	0	0	26	3	0	1	0	0	0	88
03:55 PM	1	43	2	0	1	0	0	0	2	23	2	0	2	0	2	0	78
Total	12	458	20	0	35	1	9	0	4	332	58	0	25	1	14	0	969
04:00 PM	2	34	4	0	0	0	0	0	0	33	4	0	2	0	1	0	80
04:05 PM	1	39	1	0	1	0	0	0	0	32	3	0	3	0	2	0	82
04:10 PM	3	40	0	0	2	0	0	0	0	23	4	0	4	0	2	0	78
04:15 PM	3	39	1	0	1	1	0	0	0	25	2	0	2	1	2	0	77
04:20 PM	1	41	2	0	1	0	0	0	1	23	2	0	1	0	1	0	73
04:25 PM	2	33	1	0	2	1	0	0	0	32	4	0	4	0	0	0	79
04:30 PM	1	40	4	0	1	0	1	0	0	30	5	0	1	0	0	0	83
04:35 PM	5	34	1	0	2	0	2	0	0	23	3	0	3	1	1	0	75
04:40 PM	5	47	1	0	0	0	1	0	1	14	3	0	2	0	1	0	75
04:45 PM	5	46	2	0	1	0	1	0	0	23	5	0	2	0	2	0	87
04:50 PM	1	41	0	0	0	0	1	0	0	36	6	0	1	0	2	0	88
04:55 PM	0	36	2	0	1	0	0	0	1	31	4	0	4	0	2	0	81
Total	29	470	19	0	12	2	6	0	3	325	45	0	29	2	16	0	958
05:00 PM	1	42	1	1	3	0	0	0	2	30	2	0	1	0	1	0	84
05:05 PM	4	40	3	0	6	1	0	0	1	34	4	0	7	0	1	0	101
05:10 PM	0	49	1	0	3	2	1	0	0	41	4	0	4	0	4	0	109
05:15 PM	0	49	0	0	3	0	1	0	0	33	2	0	2	1	1	0	92
05:20 PM	2	47	0	0	2	0	1	0	0	34	3	0	5	0	0	0	94
05:25 PM	1	50	1	0	3	0	1	0	1	30	6	0	3	0	1	0	97
Grand Total	49	1205	45	1	67	6	19	0	11	859	124	0	76	4	38	0	2504
Apprch %	3.8	92.7	3.5	0.1	72.8	6.5	20.7	0.0	1.1	86.4	12.5	0.0	64.4	3.4	32.2	0.0	
Total %	2.0	48.1	1.8	0.0	2.7	0.2	0.8	0.0	0.4	34.3	5.0	0.0	3.0	0.2	1.5	0.0	

LSC Transportation Consultants, Inc.

516 N. Tejon St.
Colorado Springs, CO
(719) 633-2868


File Name : Grinnell - Fountain Valley School PM

Site Code : 00051210

Start Date : 05/12/2010

Page No : 2

	Grinnell From North					Fountain Valley School From East					Grinnell From South					Crandall From West					
Start Time	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Int. Total
Peak Hour From 03:00 PM to 05:25 PM - Peak 1 of 1																					
Intersection	04:30 PM																				
Volume	25	521	16	1	563	25	3	10	0	38	6	359	47	0	412	35	2	16	0	53	1066
Percent	4.4	92.5	2.8	0.2		65.8	7.9	26.3	0.0		1.5	87.1	11.4	0.0		66.0	3.8	30.2	0.0		
05:10																					
Volume	0	49	1	0	50	3	2	1	0	6	0	41	4	0	45	4	0	4	0	8	109
Peak Factor																					0.815
High Int.	04:40 PM					05:05 PM					05:10 PM					05:05 PM					
Volume	5	47	1	0	53	6	1	0	0	7	0	41	4	0	45	7	0	1	0	8	
Peak Factor	0.885					0.452					0.763					0.552					

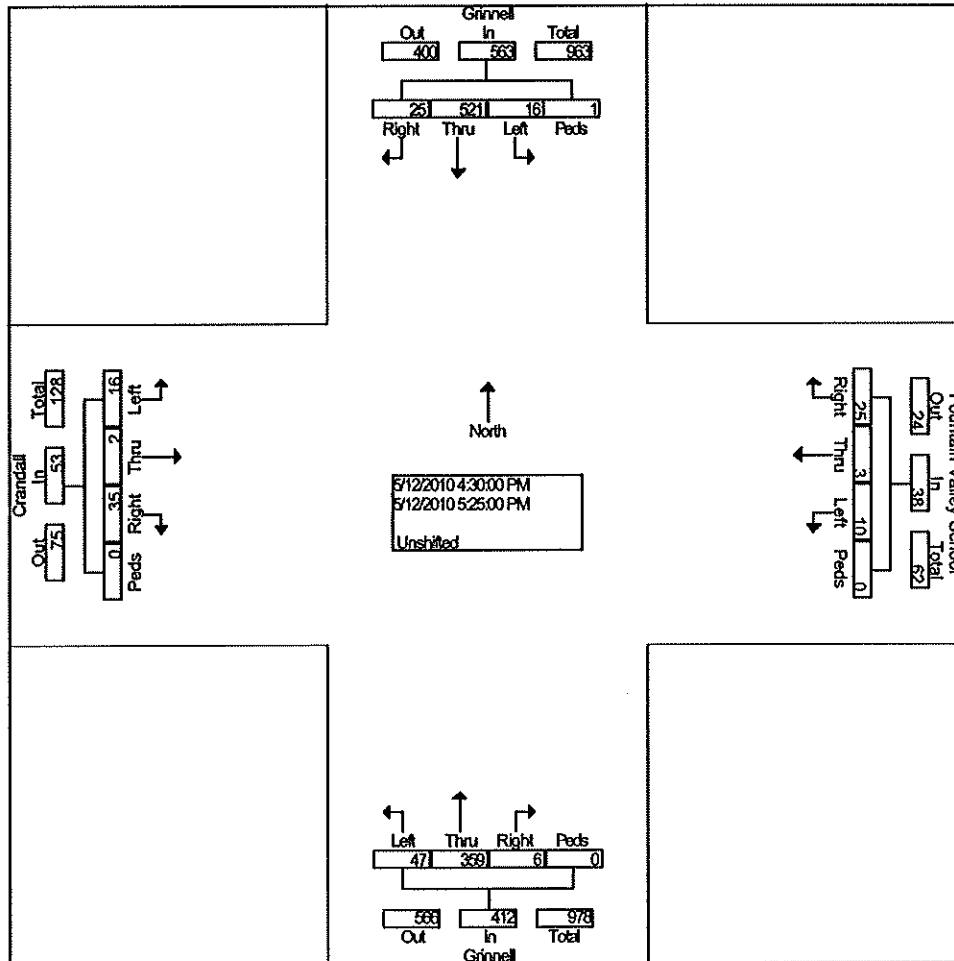

LSC Transportation Consultants, Inc.

516 N. Tejon St.

Colorado Springs, CO File Name : Grinnell - Fountain Valley School AM


(719) 633-2868

Site Code : 00051310

Start Date : 05/13/2010

Page No : 2


	Grinnell From North					Fountain Valley School From East					Grinnell From South					Crandall From West					
Start Time	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Int. Total
Peak Hour From 06:45 AM to 08:10 AM - Peak 1 of 1																					
Intersection	07:00 AM																				
Volume	20	345	32	0	397	12	0	4	0	16	17	434	55	0	506	39	0	8	0	47	966
Percent	5.0	86.9	8.1	0.0		75.0	0.0	25.0	0.0		3.4	85.8	10.9	0.0		83.0	0.0	17.0	0.0		
07:35																					
Volume	1	41	9	0	51	2	0	1	0	3	3	43	3	0	49	3	0	0	0	3	106
Peak																					0.759
Factor																					
High Int.	07:35 AM					07:35 AM					07:25 AM					07:15 AM					
Volume	1	41	9	0	51	2	0	1	0	3	1	46	4	0	51	11	0	1	0	12	
Peak																					
Factor	0.649					0.444					0.827					0.326					

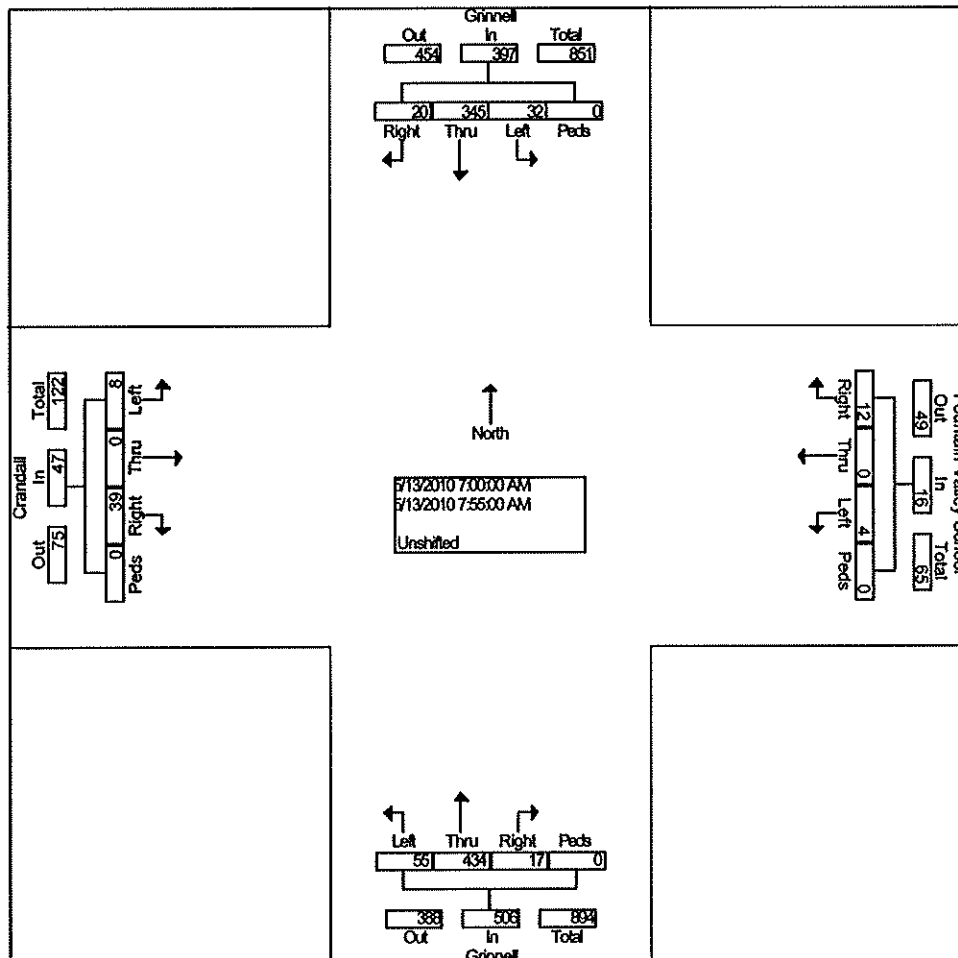

LSC Transportation Consultants, Inc.
 516 N. Tejon St.
 Colorado Springs, CO
 (719) 633-2868

File Name : Grinnell - Fontaine PM
 Site Code : 00000000
 Start Date : 05/12/2010
 Page No : 2


	Grinnell From North					Fontaine From East					Grinnell From South					Fontaine From West					
Start Time	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Int. Total
Peak Hour From 03:00 PM to 05:15 PM - Peak 1 of 1																					
Intersection	04:30 PM																				
Volume	179	34	333	0	546	200	357	5	1	563	14	29	9	0	52	13	524	173	0	710	1871
Percent	32.8	6.2	61.0	0.0		35.5	63.4	0.9	0.2		26.9	55.8	17.3	0.0		1.8	73.8	24.4	0.0		
04:45 Volume	36	10	87	0	133	52	109	1	0	162	2	5	4	0	11	3	139	43	0	185	491
Peak Factor																					0.953
High Int.	05:15 PM					04:45 PM					04:30 PM					04:45 PM					
Volume	54	11	88	0	153	52	109	1	0	162	5	9	1	0	15	3	139	43	0	185	
Peak Factor	0.892										0.869					0.867					0.959

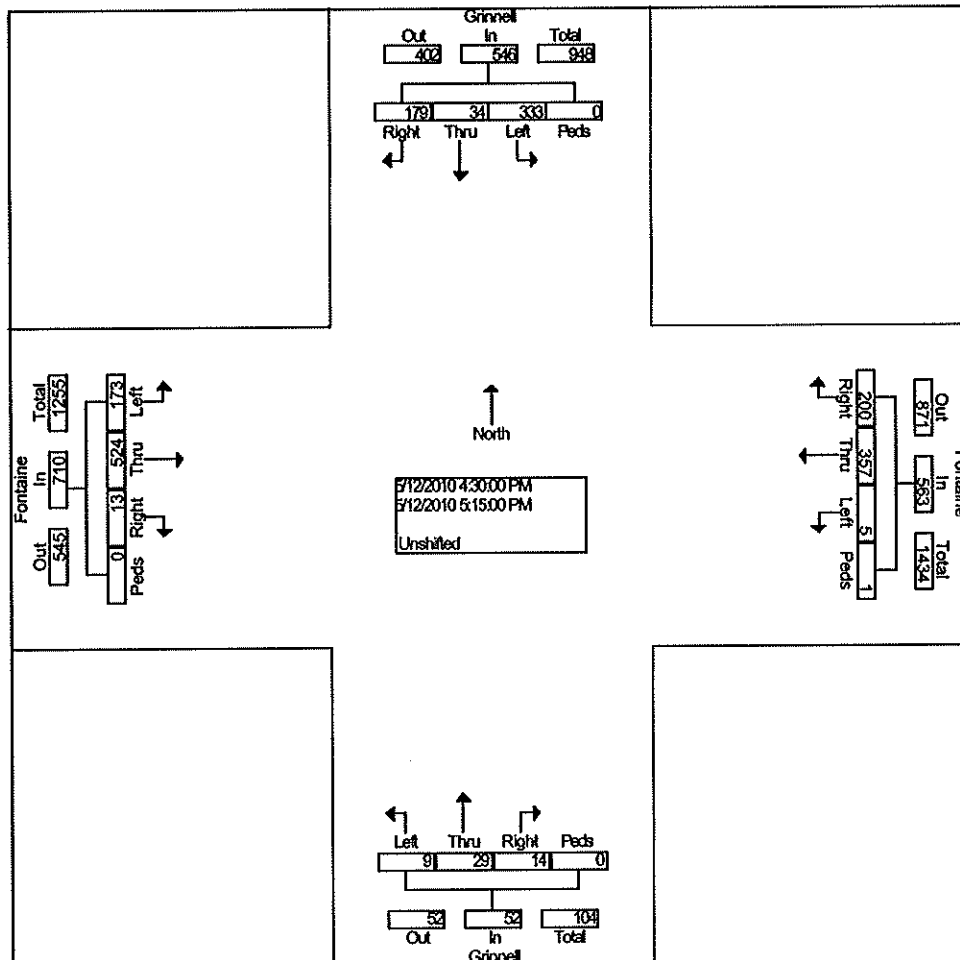

LSC Transportation Consultants, Inc.
 516 N. Tejon St.
 Colorado Springs, CO
 (719) 633-2868

File Name : Grinnell - Fontaine AM
 Site Code : 00000000
 Start Date : 05/13/2010
 Page No : 2

	Grinnell From North					Fontaine From East					Grinnell From South					Fontaine From West					
Start Time	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Rig ht	Thr u	Left	Ped s	App. Total	Int. Total
Peak Hour From 06:45 AM to 08:00 AM - Peak 1 of 1																					
Intersecti on	07:00 AM																				
Volume	173	25	150	0	348	286	395	3	0	684	3	46	10	0	59	7	169	133	0	309	1400
Percent	49.	7.2	43.	0.0		41.	57.	0.4	0.0		5.1	78.	16.	0.0		2.3	54.	43.	0.0		
	7		1			8	7					0	9				7	0			
07:15 Volume	46	7	26	0	79	71	114	2	0	187	1	20	2	0	23	1	48	42	0	91	380
Peak Factor																					0.921
High Int.	07:00 AM					07:15 AM					07:15 AM					07:15 AM					
Volume	46	9	55	0	110	71	114	2	0	187	1	20	2	0	23	1	48	42	0	91	
Peak Factor	0.791					0.914					0.641					0.849					

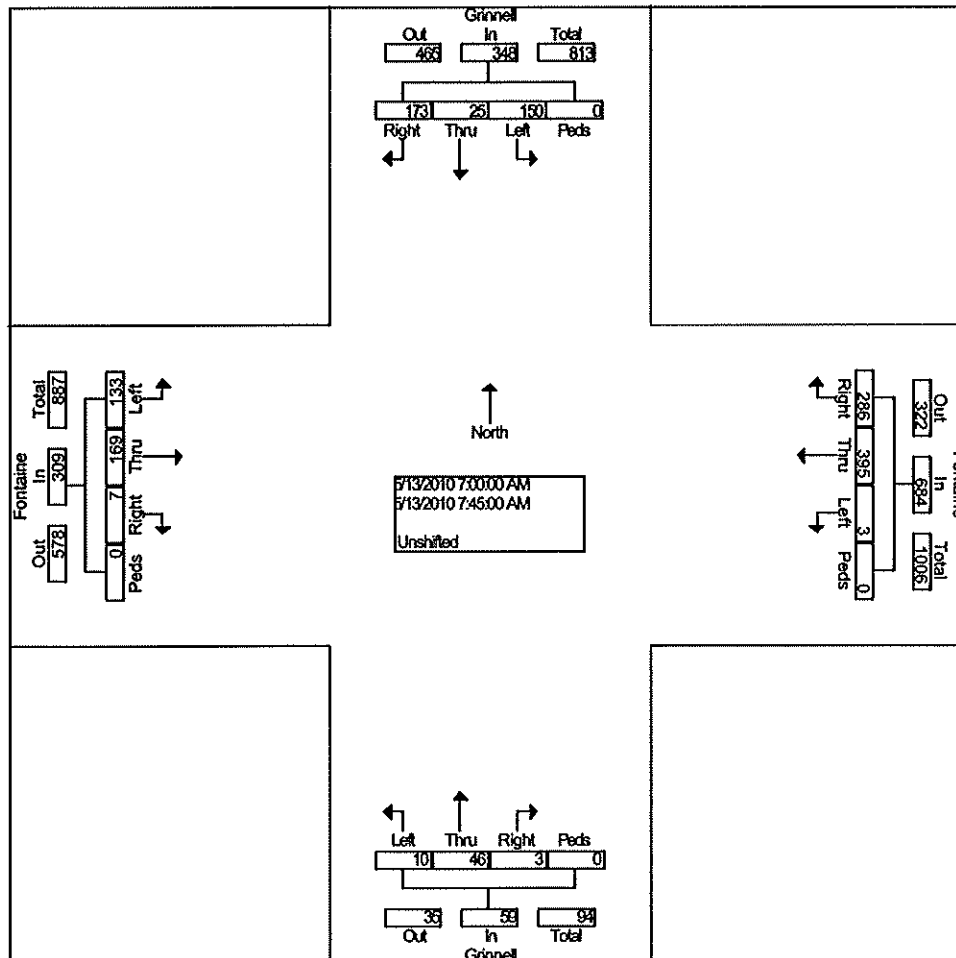

HCM Unsignalized Intersection Capacity Analysis

3: Crandall & Grinnell

Existing Traffic
School PM Peak Hour

													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕		↙	↑↑		↗	↙	↑↑	↗
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Volume (veh/h)	15	1	25	10	1	35	60	330	5	20	460	10	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	
Hourly flow rate (vph)	16	1	26	11	1	37	63	347	5	21	484	11	
Pedestrians													
Lane Width (ft)													
Walking Speed (ft/s)													
Percent Blockage													
Right turn flare (veh)													
Median type		None			None								
Median storage veh													
Upstream signal (ft)													
pX, platoon unblocked													
vC, conflicting volume	864	1005	242	785	1011	174	495			353			
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	864	1005	242	785	1011	174	495			353			
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1			
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2			
p0 queue free %	93	100	97	96	100	96	94			98			
cM capacity (veh/h)	223	222	759	257	220	840	1065			1203			
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4			
Volume Total	43	48	63	174	174	5	21	242	242	11			
Volume Left	16	11	63	0	0	0	21	0	0	0			
Volume Right	26	37	0	0	0	5	0	0	0	11			
cSH	391	540	1065	1700	1700	1700	1203	1700	1700	1700			
Volume to Capacity	0.11	0.09	0.06	0.10	0.10	0.00	0.02	0.14	0.14	0.01			
Queue Length 95th (ft)	9	7	5	0	0	0	1	0	0	0			
Control Delay (s)	15.3	12.3	8.6	0.0	0.0	0.0	8.0	0.0	0.0	0.0			
Lane LOS	C	B	A				A						
Approach Delay (s)	15.3	12.3	1.3				0.3						
Approach LOS	C	B											
Intersection Summary													
Average Delay			1.9										
Intersection Capacity Utilization			30.1%			ICU Level of Service				A			
Analysis Period (min)			15										

HCM Unsignalized Intersection Capacity Analysis

3: Crandall & Grinnell

Existing Traffic
AM Peak Hour

													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕		↙	↕↕	↗	↙	↕↕	↗	
Sign Control		Stop			Stop			Free			Free		
Grade		0%			0%			0%			0%		
Volume (veh/h)	10	0	40	5	0	10	55	435	15	30	345	20	
Peak Hour Factor	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	
Hourly flow rate (vph)	11	0	46	6	0	11	63	500	17	34	397	23	
Pedestrians													
Lane Width (ft)													
Walking Speed (ft/s)													
Percent Blockage													
Right turn flare (veh)													
Median type	None			None									
Median storage veh													
Upstream signal (ft)													
pX, platoon unblocked													
vC, conflicting volume	853	1109	198	940	1115	250	420						517
vC1, stage 1 conf vol													
vC2, stage 2 conf vol													
vCu, unblocked vol	853	1109	198	940	1115	250	420						517
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1						4.1
tC, 2 stage (s)													
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2						2.2
p0 queue free %	95	100	94	97	100	98	94						97
cM capacity (veh/h)	232	190	810	192	189	750	1136						1045
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4			
Volume Total	57	17	63	250	250	17	34	198	198	23			
Volume Left	11	6	63	0	0	0	34	0	0	0			
Volume Right	46	11	0	0	0	17	0	0	0	23			
cSH	541	381	1136	1700	1700	1700	1045	1700	1700	1700			
Volume to Capacity	0.11	0.05	0.06	0.15	0.15	0.01	0.03	0.12	0.12	0.01			
Queue Length 95th (ft)	9	4	4	0	0	0	3	0	0	0			
Control Delay (s)	12.5	14.9	8.4	0.0	0.0	0.0	8.6	0.0	0.0	0.0			
Lane LOS	B	B	A					A					
Approach Delay (s)	12.5	14.9	0.9					0.7					
Approach LOS	B	B											
Intersection Summary													
Average Delay				1.6									
Intersection Capacity Utilization				28.8%	ICU Level of Service			A					
Analysis Period (min)				15									

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

Existing Traffic
PM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↙	↑↑	↗	↙	↑↑	↗
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	15	2	35	10	5	25	45	360	5	15	520	25
Peak Hour Factor	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91
Hourly flow rate (vph)	16	2	38	11	5	27	49	396	5	16	571	27
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	931	1104	286	853	1126	198	599			401		
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	931	1104	286	853	1126	198	599			401		
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1		
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2		
p0 queue free %	92	99	95	95	97	97	95			99		
cM capacity (veh/h)	199	196	711	225	190	810	974			1154		
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	57	44	49	198	198	5	16	286	286	27		
Volume Left	16	11	49	0	0	0	16	0	0	0		
Volume Right	38	27	0	0	0	5	0	0	0	27		
cSH	386	394	974	1700	1700	1700	1154	1700	1700	1700		
Volume to Capacity	0.15	0.11	0.05	0.12	0.12	0.00	0.01	0.17	0.17	0.02		
Queue Length 95th (ft)	13	9	4	0	0	0	1	0	0	0		
Control Delay (s)	15.9	15.3	8.9	0.0	0.0	0.0	8.2	0.0	0.0	0.0		
Lane LOS	C	C	A				A					
Approach Delay (s)	15.9	15.3	1.0				0.2					
Approach LOS	C	C										
Intersection Summary												
Average Delay			1.8									
Intersection Capacity Utilization			32.1%			ICU Level of Service				A		
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

2018 Total Traffic
AM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↙	↕	↗	↙	↕	↗
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	10	1	40	5	2	20	55	510	30	55	405	20
Peak Hour Factor	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Hourly flow rate (vph)	11	1	46	6	2	23	63	586	34	63	466	23
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	1036	1339	233	1118	1328	293	489			621		
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	1036	1339	233	1118	1328	293	489			621		
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1		
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2		
p0 queue free %	93	99	94	96	98	97	94			93		
cM capacity (veh/h)	161	133	769	137	135	703	1071			956		
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	59	31	63	293	293	34	63	233	233	23		
Volume Left	11	6	63	0	0	0	63	0	0	0		
Volume Right	46	23	0	0	0	34	0	0	0	23		
cSH	419	339	1071	1700	1700	1700	956	1700	1700	1700		
Volume to Capacity	0.14	0.09	0.06	0.17	0.17	0.02	0.07	0.14	0.14	0.01		
Queue Length 95th (ft)	12	8	5	0	0	0	5	0	0	0		
Control Delay (s)	15.0	16.7	8.6	0.0	0.0	0.0	9.0	0.0	0.0	0.0		
Lane LOS	B	C	A				A					
Approach Delay (s)	15.0	16.7	0.8				1.0					
Approach LOS	B	C										
Intersection Summary												
Average Delay			1.9									
Intersection Capacity Utilization			31.6%			ICU Level of Service				A		
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

2018 Total Traffic
PM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↙	↕	↗	↙	↕	↗
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	15	5	35	15	5	45	45	420	10	25	610	25
Peak Hour Factor	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91	0.91
Hourly flow rate (vph)	16	5	38	16	5	49	49	462	11	27	670	27
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type	None			None								
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	1107	1297	335	992	1313	231	698	473				
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	1107	1297	335	992	1313	231	698	473				
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1	4.1				
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2	2.2				
p0 queue free %	88	96	94	90	96	94	94	97				
cM capacity (veh/h)	141	148	661	172	145	772	894	1086				
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	60	71	49	231	231	11	27	335	335	27		
Volume Left	16	16	49	0	0	0	27	0	0	0		
Volume Right	38	49	0	0	0	11	0	0	0	27		
cSH	284	361	894	1700	1700	1700	1086	1700	1700	1700		
Volume to Capacity	0.21	0.20	0.06	0.14	0.14	0.01	0.03	0.20	0.20	0.02		
Queue Length 95th (ft)	20	18	4	0	0	0	2	0	0	0		
Control Delay (s)	21.0	17.4	9.3	0.0	0.0	0.0	8.4	0.0	0.0	0.0		
Lane LOS	C	C	A				A					
Approach Delay (s)	21.0	17.4	0.9				0.3					
Approach LOS	C	C										
Intersection Summary												
Average Delay	2.3											
Intersection Capacity Utilization	35.1%											
ICU Level of Service	A											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

2018 Total Traffic
School PM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	15	2	25	15	2	60	60	385	5	35	540	10
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Hourly flow rate (vph)	16	2	26	16	2	63	63	405	5	37	568	11
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	1035	1179	284	917	1184	203	579			411		
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	1035	1179	284	917	1184	203	579			411		
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1		
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2		
p0 queue free %	90	99	96	92	99	92	94			97		
cM capacity (veh/h)	158	171	713	201	170	804	991			1145		
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	44	81	63	203	203	5	37	284	284	11		
Volume Left	16	16	63	0	0	0	37	0	0	0		
Volume Right	26	63	0	0	0	5	0	0	0	11		
cSH	296	478	991	1700	1700	1700	1145	1700	1700	1700		
Volume to Capacity	0.15	0.17	0.06	0.12	0.12	0.00	0.03	0.17	0.17	0.01		
Queue Length 95th (ft)	13	15	5	0	0	0	2	0	0	0		
Control Delay (s)	19.3	14.1	8.9	0.0	0.0	0.0	8.2	0.0	0.0	0.0		
Lane LOS	C	B	A				A					
Approach Delay (s)	19.3	14.1	1.2				0.5					
Approach LOS	C	B										
Intersection Summary												
Average Delay		2.4										
Intersection Capacity Utilization		33.5%		ICU Level of Service						A		
Analysis Period (min)		15										

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

2035 Total Traffic
AM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↙	↑↑	↗	↙	↑↑	↗
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	10	1	40	5	2	20	55	715	30	55	565	20
Peak Hour Factor	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.95	0.87	0.87	0.95	0.87
Hourly flow rate (vph)	11	1	46	6	2	23	63	753	34	63	595	23
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	1248	1635	297	1349	1623	376	618			787		
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	1248	1635	297	1349	1623	376	618			787		
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1			4.1		
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2		
p0 queue free %	90	99	93	94	97	96	93			92		
cM capacity (veh/h)	110	86	699	90	88	621	958			828		
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	59	31	63	376	376	34	63	297	297	23		
Volume Left	11	6	63	0	0	0	63	0	0	0		
Volume Right	46	23	0	0	0	34	0	0	0	23		
cSH	319	245	958	1700	1700	1700	828	1700	1700	1700		
Volume to Capacity	0.18	0.13	0.07	0.22	0.22	0.02	0.08	0.17	0.17	0.01		
Queue Length 95th (ft)	17	11	5	0	0	0	6	0	0	0		
Control Delay (s)	18.8	21.8	9.0	0.0	0.0	0.0	9.7	0.0	0.0	0.0		
Lane LOS	C	C	A				A					
Approach Delay (s)	18.8	21.8	0.7				0.9					
Approach LOS	C	C										
Intersection Summary												
Average Delay	1.8											
Intersection Capacity Utilization	37.3%			ICU Level of Service				A				
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

2035 Total Traffic
PM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔		↵	↕↕	↵	↵	↕↕	↵
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	15	5	35	15	5	45	45	590	10	25	855	25
Peak Hour Factor	0.95	0.91	0.95	0.91	0.91	0.91	0.95	0.95	0.91	0.91	0.95	0.95
Hourly flow rate (vph)	16	5	37	16	5	49	47	621	11	27	900	26
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	1412	1682	450	1260	1697	311	926				632	
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	1412	1682	450	1260	1697	311	926				632	
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1				4.1	
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2				2.2	
p0 queue free %	80	94	93	84	93	93	94				97	
cM capacity (veh/h)	80	85	556	105	83	685	734				947	
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	58	71	47	311	311	11	27	450	450	26		
Volume Left	16	16	47	0	0	0	27	0	0	0		
Volume Right	37	49	0	0	0	11	0	0	0	26		
cSH	177	242	734	1700	1700	1700	947	1700	1700	1700		
Volume to Capacity	0.33	0.30	0.06	0.18	0.18	0.01	0.03	0.26	0.26	0.02		
Queue Length 95th (ft)	34	30	5	0	0	0	2	0	0	0		
Control Delay (s)	34.9	26.0	10.2	0.0	0.0	0.0	8.9	0.0	0.0	0.0		
Lane LOS	D	D	B				A					
Approach Delay (s)	34.9	26.0	0.7				0.3					
Approach LOS	D	D										
Intersection Summary												
Average Delay			2.6									
Intersection Capacity Utilization			41.8%	ICU Level of Service					A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
3: Crandall & Grinnell

2035 Total Traffic
School PM Peak Hour

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↙	↑↑	↗	↙	↑↑	↗
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Volume (veh/h)	15	2	25	15	2	60	60	540	5	35	755	10
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Hourly flow rate (vph)	16	2	26	16	2	63	63	568	5	37	795	11
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	1343	1568	397	1193	1574	284	805	574				
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	1343	1568	397	1193	1574	284	805	574				
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1	4.1				
tC, 2 stage (s)												
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2	2.2				
p0 queue free %	83	98	96	87	98	91	92	96				
cM capacity (veh/h)	90	98	602	122	97	713	815	995				
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	NB 4	SB 1	SB 2	SB 3	SB 4		
Volume Total	44	81	63	284	284	5	37	397	397	11		
Volume Left	16	16	63	0	0	0	37	0	0	0		
Volume Right	26	63	0	0	0	5	0	0	0	11		
cSH	184	339	815	1700	1700	1700	995	1700	1700	1700		
Volume to Capacity	0.24	0.24	0.08	0.17	0.17	0.00	0.04	0.23	0.23	0.01		
Queue Length 95th (ft)	23	23	6	0	0	0	3	0	0	0		
Control Delay (s)	30.6	18.9	9.8	0.0	0.0	0.0	8.8	0.0	0.0	0.0		
Lane LOS	D	C	A					A				
Approach Delay (s)	30.6	18.9	1.0					0.4				
Approach LOS	D	C										
Intersection Summary												
Average Delay	2.4											
Intersection Capacity Utilization	39.4%			ICU Level of Service					A			
Analysis Period (min)	15											