

CODE REQUIREMENTS							
LANDSCAPE SETBA	CKS (LS)						
STREET NAME OR	STREET CLASSIFICATION	WIDTH (FT.)	LINEAR	TREE/FEET	NO. OF TREES		
ZONE BOUNDARY (ELEV.)		REQ./PROV.	FOOTAGE	REQUIRED	REQ./PROVIDED		
FALCON MARKET PLACE	PRIVATE ROAD	10/10	163	1/50 FT	3/3		
	EXPRESSWAY	25/25	175	1/20 FT	9/0 ALT PLAN		

MOTOR VEHICLE LOTS (MV)

2/3 LENGTH OF FRONTAGE (FT)

MIN. 3' SCREENING PLANTS REQ./PROV. EVERGREEN PLANTS REQ. 50%/PROV.

NTERNAL LANDSCA	PING (IL)		
NTERNAL LANDSCAPE AR	EA INCLUDES ALL LANDSCAPE	AREAS NOT INCLUDING SETBACKS, BUFFERS OR MOTOR	VEHICLE ISLANDS.
NET SITE AREA (SF) (LESS PUBLIC R.O.W.)	PERCENT MINIMUM INTERNAL AREA (5%)	INTERNAL AREA (SF) REQ./PROV.	INTERNAL TREES (1/500 SF) (EXCLUDING DRIVEWAYS)
16,130 SF	NON-RESIDENTIAL	2307 SF/2500	5/0
SHRUB SUBSTITUTES REQ/PROV.		INTERNAL PLANT ABBR. DENOTED ON PLAN	PERCENT GROUND PLANE VEG. REQ./PROV.

_							
	LANDSCAPE BUFFERS AND SCREENS (LB)						
	STREET NAME OR PROPERTY LINE (ELEV.)	LINEAR FOOTAGE	SETBACK BUFFER REQ. / PROV.	BUFFER TREES (1/25') REQ./PROV.	EVERGREEN TREES (1/3) REQ./PROV.		
	NONE	0			-		

			PLANT SCHEE	DULE		
Symbol	Abbr.	Quanity	Botanical Name	Common Name	Mature Wdth/Hght	Size
EVERGF	REEN TREES	:				B&B
	PE	5	Pinus edulis	Pinyon Pine	15'X15'	6' ht.
DECID	UOUS TRE	ES:				
	GTSM	3	Gleditsia triacanthos 'Shademaster'	Shademaster Honeylocust	30'X25'	1-1/2"cal
	MS PV	2 4	Malus 'Spring Snow' Prunus virginiana 'Sucker Punch'	Spring Snow Crabapple Canada Red Cherry	15'X15' 15'X15'	1-1/2"cal 1-1/2"cal
EVERGE	REEN SHRUE	BS:				
Sold of the sold o	JCS JI JS	7 16 11	Juniperus x chinensis 'Spartan' Juniperus sabina Picea pungens 'Glauca Globosa'	Spartan Juniper Buffalo Juniper Globe Blue Spruce	3-4' x 12-15' 6-8' x 12-18" 5-6' x 3-5'	5 gal. 5 gal 5 gal
DECIDU	OUS SHRUB	S:				
⊙ ⊙	CC PFG	16 30	Caryopteris x clandonensis 'Drk Knt' Potentilla fruticosa 'Gold Finger'	Dark Knight Blue Mist Spirea Gold Finger Potentilla	2' x 2-4' 4-5' x 3-4'	5 gal 5 gal
ORNAM	ENTAL GRAS					
	CA	41	Calamagrostis acutiflora 'Karl Foerster'	Feather Reed Grass	1-3' / 2-3'	#1 CONT
PERENN O	NALS: HEM LES SAL	5 3 55	Hemerocallis 'Red Magic' Leucanthemum superbum 'lacross' Salvia nemorosa 'May Night'	Red Magic Daylily Lacross Shasta Daisy May Night Salvia	18" x 12" 24 x 24" 24 x 24"	#1 CONT #1 CONT #1 CONT

SYMBOL	DESCRIPTION	APPROX. SF
	Turf type Sod Grass: Fescue blend	4,872 SF
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Black Granite Rock: 3/4" Diameter, 3" Depth (with weed barrier) Submit sample to owner prior to ordering material	7,080 SF
$\begin{array}{c c} \times & \times & \times \\ \times & \times & \times \\ \times & \times & \times \end{array}$	Seed Grass. Seed Mix 'A'. Refer to notes. Submit sample/spec to owner prior to ordering material	3,123 SF
	Seed Grass. Seed Mix 'A'. Refer to notes. Submit sample/spec to owner prior to ordering material	2,564 SF
	Steel Edger. Refer to notes	
	Accent Boulders: Denver Granite - LG, 24x36" Dia, SM, 12x18" Dia	

DOCUMENT NOTE

IRRESPECTIVE OF ANY OTHER TERM IN THIS DOCUMENT, LANDSCAPE ARCHITECT SHALL NOT CONTROL OR BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SCHEDULES, SEQUENCES OR PROCEDURES, OR FOR CONSTRUCTION SAFETY OR ANY OTHER RELATED PROGRAMS, OR FOR ANOTHER PARTIES' ERRORS OR OMISSIONS OR FOR ANOTHER PARTIES' FAILURE TO COMPLETE THEIR WORK OR SERVICES IN ACCORDANCE WITH LANDSCAPE ARCHITECT'S DOCUMENTS.

LOT 6 - FALCON MARKE WOODMEN & MERIDIAN EL PASO COUNTY, COLORADO

MARKETF

1102-22

L1.1

REVISIONS

9-12-22 PER COMMENTS

11-4-22 PER COMMENTS ORIGINAL DATE 9-1-22 DRAWN BY DESCRIPTION LANDSCAPE PLAN SHEET NO.

LANDSCAPE PLAN

Know what's below.

Call before you dig.

# **UTILITIES NOTE**

GRADE FOR 5-12" DIAMETER ROCK AREAS SHALL BE 4" BELOW TOP OF SIDEWALK/CURB/PAVING. AT ALL OTHER ROCK AREAS GRADE SHALL BE 3" BELOW SIDEWALK/CURB. AT SOD/SEED AREAS GRADE SHALL BE 1" BELOW TOP OF SIDEWALK/CURB.

GRADE NOTE

SHALL BE 6' MINIMUM DISTANCE FROM ANY GAS OR ELECTRIC AND 10' FROM GAS MAINS RATED AT 150PSI. FOR SANITARY SEWER AND WATER MAINLINES PLANS SHALL BE RESOLVED WITH GENERAL CONTRACTOR PRIOR TO PLANTING. ALL ELECTRICAL VAULTS AND TRANSFORMERS SHALL BE KEPT CLEAR FROM PLANT MATERIAL PER COLORADO SPRINGS UTILITIES GUIDELINES "LANDSCAPING AROUND ELECTRICAL EQUIPMENT". SEE COLORADO SPRINGS

### **GENERAL SITE NOTES**

- CONTRACTOR RESPONSIBLE FOR COORDINATING AND INSTALLING ALL SLEEVING REQUIRED FOR LANDSCAPE AND IRRIGATION CONSTRUCTION. COORDINATE WITH GENERAL CONTRACTOR. ALL PLANTING AREAS SHALL RECEIVE SLEEVING. REFER TO PLANTING PLAN FOR ADDITIONAL INFORMATION.
- 2. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES, AS SHOWN ON THESE PLANS, IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES AND, WHERE POSSIBLE. MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE LOCAL UTILITY LOCATION CENTER AT LEAST 48 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATIONS OF THE UTILITIES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL VERIFY PERTINENT LOCATIONS AND ELEVATIONS, ESPECIALLY AT CONNECTION POINTS AND AT POTENTIAL UTILITY CONFLICTS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES THAT CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THESE PLANS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS FOR ALL APPLICABLE
- 4. ALL MATERIALS, WORKMANSHIP, AND CONSTRUCTION OF PUBLIC IMPROVEMENTS SHALL MEET OR EXCEED THE STANDARDS AND SPECIFICATIONS SET FORTH IN LOCAL CITY STANDARDS AND SPECIFICATIONS AND APPLICABLE STATE AND FEDERAL REGULATIONS. WHERE THERE IS CONFLICT BETWEEN THESE PLANS AND THE SPECIFICATIONS, OR ANY APPLICABLE STANDARDS, THE HIGHER QUALITY STANDARD SHALL APPLY. ALL WORK SHALL BE INSPECTED AND APPROVED BY THE APPROPRIATE GOVERNING AGENCIES.
- 5. THE CONTRACTOR SHALL HAVE ONE (1) SIGNED COPY OF THE APPROVED CONSTRUCTION DOCUMENTS, ONE (1) COPY OF THE APPROPRIATE STANDARDS AND SPECIFICATIONS, AND A COPY OF ANY PERMITS AND EXTENSION AGREEMENTS NEEDED FOR THE JOB, ON-SITE AT ALL TIMES.
- 6. ALL REFERENCES TO ANY PUBLISHED STANDARDS SHALL REFER TO THE LATEST REVISION OF SAID STANDARD, UNLESS SPECIFICALLY STATED OTHERWISE.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING ROADWAYS FREE AND CLEAR OF ALL CONSTRUCTION DEBRIS TRACKED FROM THE SITE.
- 8. THE CONTRACTOR SHALL PROTECT ALL SITE ELEMENTS DURING CONSTRUCTION INCLUDING, BUT NOT LIMITED TO: CONCRETE FLATWORK, CURB & GUTTER, PAVING, SIGNS, TREES, UTILITIES, ETC. ANY DAMAGE TO INFRASTRUCTURE SHALL BE RESPONSIBILITY OF CONTRACTOR TO REPAIR AND/OR REPLACE IN EQUAL OR BETTER CONDITION. ANY DAMAGE SHALL BE DOCUMENTED THE DAY IT OCCURS AND REPORTED TO THE CLIENT WITHIN 12 HOURS. COORDINATE WITH GENERAL CONTRACTOR.
- CONTRACTOR IS RESPONSIBLE FOR SUBMITTING LANDSCAPE AND IRRIGATION SUBMITTALS TO OWNER FOR APPROVAL PRIOR TO START OF ANY WORK.

# MAINTENANCE NOTE

#### ON-GOING MAINTENANCE DURING CONSTRUCTION:

THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ON-GOING MAINTENANCE OF ALL COMPLETED LANDSCAPE AND IRRIGATION WORK AS DEFINED UNDER CONTRACT WITH OWNER.

BEGIN MAINTENANCE IMMEDIATELY AFTER PLANTING AND CONTINUE UNTIL LANDSCAPE WORK IS COMPLETED, ACCEPTED BY OWNER, AND IF REQUESTED A FORMAL MAINTENANCE PERIOD IS INITIATED. MAINTAIN LAWNS BY WATERING, FERTILIZING, WEEDING, MOWING, TRIMMING AND OTHER OPERATIONS SUCH AS ROLLING, REGARDING, REPLANTING AS REQUIRED THROUGH CONSTRUCTION PERIOD. REMULCH WITH NEW MULCH IN AREAS WHERE MULCH HAS BEEN DISTURBED BY CONSTRUCTION OPERATIONS SUFFICIENTLY TO NULLIFY ITS PURPOSE. CONTRACTOR SHALL REPAIR SEEDED AREAS DAMAGED BY TRAFFIC AND/OR VANDALISM DURING THE CONSTRUCTION PERIOD.

IF THE IRRIGATION SYSTEM IS NOT AVAILABLE FOR PROPER WATERING AT THE TIME OF INSTALLATION, PROVIDE AND MAINTAIN TEMPORARY PIPING, HOSES, AND LAWN WATERING EQUIPMENT AS REQUIRED TO CONVEY WATER FROM SOURCES AND TO KEEP THE LAWN AREAS UNIFORMLY MOIST AS REQUIRED FOR PROPER GROWTH. FAILURE OF THE IRRIGATION SYSTEM SHALL NOT RELIEVE THE INSTALLER OF THE RESPONSIBILITY TO PROVIDE THE REQUIRED WATER. COORDINATE WITH OWNER.

### **ONE-YEAR WARRANTY**

AS AGREED WITH OWNER. CONTRACTOR SHALL PROVIDE ONE-YEAR WARRANTY ON ALL PLANT MATERIAL, GRASSES AND IRRIGATION SYSTEM.

REPLACEMENT OF DEAD, DISEASED OR SUBSTANTIALLY DAMAGED PLANT MATERIALS SHALL BE OF THE SAME OR SIMILAR TYPE AS SET FORTH IN THE LANDSCAPE PLAN. REPLACEMENT SHALL BE MADE IN A TIME PERIOD NOT EXCEEDING 15 DAYS. PLANT MATERIAL NEEDING REPLACEMENT DURING WINTER MONTHS SHALL BE REPLACED AT THE START OF THE NEXT GROWING SEASON.

THE OWNER OF THIS PROPERTY AND ANY FUTURE OWNERS SHALL BE RESPONSIBLE FOR THE PROPER LANDSCAPE AND IRRIGATION SYSTEM MAINTENANCE OF THIS SITE AND ANY RIGHT-OF-WAY AREAS BETWEEN THE CURB AND PROPERTY BOUNDARIES OF THIS SITE. MAINTENANCE OF THIS INCLUDES, BUT IS NOT LIMITED TO, IRRIGATION INSPECTIONS AND ADJUSTMENTS, IRRIGATION SYSTEM SHUT DOWN AND START UP, IRRIGATION LEAK REPAIR, LANDSCAPE WEEDING, MOWING, SEEDING, FERTILIZING, WOOD MULCH AND ROCK ADDITIONS, PRUNING AND PLANT MATERIAL REPLACEMENTS. ALL MAINTENANCE SHALL BE DONE IN ACCORDANCE WITH THE ALCC SPECIFICATIONS HANDBOOK REV EDITION 2007. OWNER SHOULD CONTACT LANDSCAPE CONTRACTOR OR LANDSCAPE ARCHITECT REGARDING ANY QUESTIONS RELATING TO THE LANDSCAPE OR IRRIGATION SYSTEM.

### SOIL PREP NOTES

### SOIL PREPARATION FOR UNDISTURBED OR COMPACTED PLANTING AREAS:

- A. IF UNDISTURBED RIP EXISTING SOIL TO A DEPTH OF NINE (9) INCHES MINIMUM IN ONE DIRECTION USING AN AGRICULTURAL RIPPER WITH TINES SPACED NO FURTHER THAN EIGHTEEN (18) INCHES APART OR TILL TO 6" DEPTH. AREAS ADJACENT TO WALKS, STRUCTURES, CURBS, ETC., WHERE THE USE OF LARGE MECHANICAL EQUIPMENT IS DIFFICULT SHALL BE WORKED WITH SMALLER EQUIPMENT OR BY HAND.
- B. REMOVE ALL RUBBLE, STONES AND EXTRANEOUS MATERIAL OVER TWO (2) INCHES IN DIAMETER FROM THE SITE.

### **SEEDING NOTES**

SEED MIX 'A': NATIVE SEED TO BE EL PASO COUNTY CONSERVATION DISTRICT ALL-PURPOSE SEED MIX. REFER TO CHART. SEED TO BE APPLIED AT 4LBS/1,000 SF USING DRILL SEED PROCESS OR HYDRO-SEED PROCESS MINIMUM OR PER EL PASO GUIDELINES. SOIL SHALL BE AMENDED BREW-GRO BIOCOMP CLASS 1 (OR CITY APPROVED EQUAL) AT 2 C.Y./1000 SF TILLED INTO TOP 4-6" OF SOIL PRIOR TO SEEDING. REFER TO CHART 5-1 FOR IRRIGATED MIX.

DEPENDING ON WEATHER, SEED SHALL BE INSTALLED WITHIN THE FOLLOWING TIME FRAMES: SEPTEMBER 1 UNTIL CONSISTENT GROUND FREEZE FOR SPRING ESTABLISHMENT (DORMANT SEEDING); SPRING THAW UNTIL JUNE 1 FOR SPRING AND SUMMER ESTABLISHMENT (ACTIVE SEEDING).

FOR HYDRO-SEEDING ALL SEEDED AREAS SHALL RECEIVE NOT LESS THAN 1 TON PER ACRE (2000 LBS) OF VIRGIN WOOD CELLULOSE HYDRO-MULCH AND 100 LBS PER ACRE OF ORGANIC TACKIFIER.

SEEDED LANDSCAPE AREAS SHALL HAVE NO BARE AREAS LARGER THAN SIX (6) SQUARE INCHES 15 DAYS AFTER

DRILL SEEDING: SEEDING EQUIPMENT USED FOR APPLYING SEED MIXTURES SHALL BE DESIGNED, MODIFIED OR EQUIPPED TO REGULATE THE APPLICATION RATE AND PLANTING DEPTH OF THE SEED MIXTURE. SEED SHALL BE UNIFORMLY DISTRIBUTED IN THE DRILL HOPPER DURING THE DRILLING OPERATION. A RANGELAND DRILL CAPABLE OF MIXING DIFFERENT SIZES AND WEIGHTS OF SEEDS SHALL BE USED. THE DRILL SHALL BE EQUIPPED WITH DOUBLE DISK FURROW OPENERS, DEPTH BANDS, PRESS WHEELS OR DRAG CHAINS.

THE SEED SHALL BE DRILLED APPROXIMATELY  $\frac{1}{2}$ " INCH BELOW THE SOIL SURFACE. HALF OF THE TOTAL RATE OF SEED APPLICATION SHALL BE DRILLED IN 1 DIRECTION, WITH THE REMAINDER OF THE SEED RATE DRILLED AT 90 DEGREES FROM THE FIRST DIRECTION.DO NOT DRILL OR SOW SEED DURING HIGH WINDS OR WHEN THE GROUND IS FROZEN OR OTHERWISE UNABLE TO BE WORKED.

ALL SEEDED AREAS LESS THAN 3:1 SHALL RECEIVE NO LESS THAN 2 TONS PER ACRE (400 LBS) OF CERTIFIED WEED FREE STRAW MULCH. STRAW MULCH SHALL BE APPLIED IN A UNIFORM MANNER BY MULCH SPREADER OR BY HAND. STRAW MULCH SHALL BE CRIMPED OR ANCHORED INTO THE SEEDBED IMMEDIATELY FOLLOWING SPREADING BY USING A MULCH TILLER (CRIMPER). MULCH TILLERS SHALL HAVE ROUND, NOTCHED-BLADES SPACED 8-INCHES APART (MIN.) AND SHALL HAVE SUFFICIENT WEIGHT TO FORCE THE VEGETATIVE MULCH A MINIMUM DEPTH OF 3-INCHES INTO THE SOIL. ALL MULCH TILLING SHALL BE DONE PERPENDICULAR TO THE FLOW-LINE OF THE SLOPE (ALONG CONTOURS). HAND CRIMPING SHALL BE PERFORMED ON AREAS WHERE MECHANICAL METHODS CANNOT BE USED.

MULCH SHALL BE APPLIED TO SEEDED AREAS (INCLUDING DAMP GROUND) WITHIN 24 HOURS FOLLOWING THE COMPLETION OF SEEDING OPERATIONS FOR THE AREA. MULCHING SHALL NOT BE PERFORMED DURING ADVERSE WEATHER CONDITIONS OR WHEN WIND PREVENTS UNIFORM DISTRIBUTION. APPLICATION SHALL BE IN A MANNER TO NOT SERIOUSLY DISTURB THE SEEDBED SURFACE.

# SOD INSTALLATION NOTE

#### SOIL PREPARATION FOR SODDED AREAS

- A. RIP EXISTING SOIL TO A DEPTH OF NINE (9) INCHES MINIMUM IN ONE DIRECTION USING AN AGRICULTURAL RIPPER WITH TINES SPACED NO FURTHER THAN EIGHTEEN (18) INCHES APART. AREAS ADJACENT TO WALKS, STRUCTURES, CURBS, ETC., WHERE THE USE OF LARGE MECHANICAL EQUIPMENT IS DIFFICULT SHALL BE WORKED WITH SMALLER EQUIPMENT OR BY HAND.
- B. REMOVE ALL RUBBLE, STONES AND EXTRANEOUS MATERIAL OVER TWO (2) INCHES IN DIAMETER FROM THE SITE.
- C. APPLY THE FOLLOWING AMENDMENTS: APPLY CLASS 1 BREW GROW MATERIAL AT A RATE OF 3 CUBIC YARDS PER 1000 SQ.FT. OF SOIL AREA. DISK (TILL) COMPOST SOIL TO A DEPTH OF 6" (INCHES).

### **BLUEGRASS SOD**

- A. PROVIDE HEALTHY, FIELD GROWN SOD, FREE FROM OTHER GRASSES, WEEDS, INSECTS AND THEIR EGGS, DISEASES, STONES AND DEBRIS, AND A MINIMUM OF ONE (1) YEAR OLD. FURNISH FROM A SOD FARM WHERE IT HAS RECEIVED REGULAR WATERING, MOWING, FERTILIZING, WEED CONTROL AND SPRAYING.
- B. MOW SOD TO 11/2" TO 2" HEIGHT PRIOR TO CUTTING AND CUT TO A UNIFORM THICKNESS OF 3/4" TO 1". DELIVER IN ROLLS 6' LONG AND 18" WIDE. SMALL, IRREGULAR OR BROKEN PIECES OF SOD WILL NOT BE ACCEPTED. DO NOT CUT MORE SOD THAN CAN BE PUT IN PLACE AT THE SITE THE
- C. DELIVER SOD TO THE SITE WITHIN 24 HOURS OF HARVESTING, AND PROTECT FROM DRYING OUT, EXPOSURE OF ROOTS TO THE SUN AND OTHER

### SOD INSTALLATION

- A. AFTER SOIL PREPARATION, ROLL THE AREA TO AN EVENLY COMPACTED, FIRM SOIL BED. REMOVE HARD AND SOFT AREAS. SCARIFY SURFACE TO
- B. LAY SOD SMOOTHLY, EDGE TO EDGE, AND WITH STAGGERED JOINTS. BUTT EDGES TIGHTLY. LAY WITHIN EIGHT (8) HOURS AFTER DELIVERY.
- C. WATER SOD LIGHTLY AS LAYING PROGRESSES TO PREVENT DRYING OF SOD. D. ROLL SOD WITH A LIGHT ROLLER DIAGONALLY, LEVELING IRREGULARITIES AND SEALING JOINTS.
- E. KEEP THE SOIL BED MOIST DURING LAYING OF SOD.

20-0-0, 10 LB OF 10-0-0, OR SIMILAR FERTILIZERS.

- F. NEWLY INSTALLED SOD SHALL BE WATERED WITH ½ INCH OF WATER PER DAY FOR THE FIRST 3 DAYS, FILLING THE WATER HOLDING CAPACITY OF THE TOP 4-6 INCHES OF THE SOIL. TOTAL AMOUNT OF WATER SHOULD BE SPLIT UP OVER 2 OR 3 WATERING PERIODS EACH DAY.
- G. WEEK 1: AFTER INSTALLATION, WATER NEW TURF 3/4" TO 1-1/4" OF WATER PER DAY FOR THE FIRST 7 DAYS SPLIT UP OVER 4 OR 5 WATERING
- PERIODS EACH DAY. THE WARMER THE TEMPERATURE, THE MORE WATER YOU NEED TO APPLY. H. WEEK 2: AFTER THE FIRST 7 DAYS, WATER AT THE RATE OF 1/2" PER DAY FOR 7 DAYS; SPLIT UP OVER 2-3 WATERING PERIODS EACH DAY.
- I. WEEK 3: IF WATERING RESTRICTIONS ALLOW, WATER 1/2" PER DAY EVERY OTHER DAY FOR 7 DAYS. AFTER THE FIRST TWO OR THREE WEEKS.
- REVERT TO WATERING 1-2 TIMES PER WEEK AS LOCAL WATERING RESTRICTIONS ALLOW. J. KENTUCKY BLUEGRASS TURF: 3.1 LBS NITROGEN PER 1.000 SF: APPLY ABOUT 1 LB OF RECOMMENDED NITROGEN IN LATE SUMMER. APPLY HALF OF REMAINING NITROGEN REQUIREDIN MID-FALL, HALF IN MID SPRING. FOR HIGH MAINTENANCE TURF, APPLY ABOUT 1 LB OF THE RECOMMENDED NITROGEN IN EARLY SUMMER. TO OBTAIN 1 LB OF ACTUAL NITROGEN, APPLY 3 TO 4 LB OF 34-0-0, 5 LB OF

ON-GOING MAINTENANCE RECOMMENDATIONS FOR SOD BLUEGRASS LAWN

WELL ESTABLISHED LAWN SHALL BE A HEALTHY, WELL-ROOTED, EVEN-COLORED, FREE OF WEEDS, OPEN JOINTS, BARE AREAS, AND SURFACE IRREGULARITIES.

MOW SODDED LAWN AS SOON AS THERE IS ENOUGH TOP GROWTH TO CUT WITH MOWER SET AT 3" HEIGHT. DO NOT CUT MORE THAN 1/3 LENGTH OF THE GRASS BLADE AT ANY ONE MOWING. DO NOT MOW LESS THAN 3" OFF WHEN GRASS IS WET. REMOVE ALL HEAVY GRASS CLIPPING IMMEDIATELY AFTER MOWING.

# LAYOUT NOTE

CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL LANDSCAPE SHOWN ON THIS PLAN. ANY DEVIATIONS FROM THIS PLAN ARE TO BE APPROVED BY OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT. DEVIATIONS FROM THE APPROVED PLAN MAY REQUIRE APPROVAL BY EL PASO COUNTY AND OWNER REPRESENTATIVE.

### **INSTALLATION NOTES**

REMOVE EXISTING TREES, DEBRIS AND WEEDS FROM SITE PRIOR TO CONSTRUCTION (AS SHOWN PER PLAN).

LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE SITE DURING CONSTRUCTION. WEEDS AND TRASH SHALL BE REMOVED DAILY AS REQUIRED.

EXISTING TOPSOIL TO BE STOCKPILED ON-SITE AND USED DURING CONSTRUCTION TO ESTABLISH GRADES WITHIN LANDSCAPE AREAS AS SHOWN PER PLAN.

CONTRACTOR SHALL REFER TO ASSOCIATED LANDSCAPE CONTRACTORS OF COLORADO HANDBOOK (ALCC), 2007 REVISED EDITION FOR ALL CONSTRUCTION FOR THIS SITE. CONTACT OWNER/LANDSCAPE ARCHITECT FOR QUESTIONS.

QUANTITIES SHOWN IN PLANT SCHEDULE ARE FOR CONVENIENCE ONLY. CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PLANT MATERIAL PER PLAN. LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL THEFTS OR DAMAGE TO PLANT MATERIAL ONCE PLANT MATERIAL IS DELIVERED TO JOB SITE.

LANDSCAPE ARCHITECT SHALL HAVE OPPORTUNITY TO INSPECT AND APPROVE ALL TREES AND ALL 1-15 GALLON MATERIAL AT JOB SITE PRIOR TO PLANTING, INCLUDING PLACEMENT INSPECTION.

ALL EDGING SEPARATING GRASS AND ROCK/MULCH AREAS TO BE GREEN PRO-STEEL OR APPROVED EQUAL. EDGING TO BE EXPOSED 1/2" +/- ABOVE FINISHED GRADES. INSTALL PER MANUFACTURE RECOMMENDATIONS. NO EDGING

ALL ROCK COVER AREAS ONLY TO BE PREPARED WITH LANDSCAPE FABRIC WITH STAPLES AT 5' O.C. FABRIC SEAMS TO BE OVERLAPPED 6" MIN. AND SECURED WITH STAPLES.

GROUND COVER SHALL BE CONTINUOUS UNDER ALL SHRUBS THROUGHOUT PROJECT SITE.

TREES AND SHRUBS TO RECEIVE ORGANIC MULCH PER DETAILS, INCLUDING ROCK AREAS-SEE DETAILS. ORGANIC MULCH TO BE 'CASCADE SHREDDED CEDAR' WITH NO LANDSCAPE FABRIC AND 4" DEPTH.

DO NOT PLANT SHRUBS OR TREES OF INCOMPATIBLE WATER REQUIREMENTS IMMEDIATELY ADJACENT TO ONE ANOTHER.

PLANT BACKFILL SHALL BE 70% NATIVE ON-SITE SOIL, AND 30% BREW-GRO BIOCOMP CLASS 1 (OR CITY APPROVED

A REPRESENTATIVE SAMPLE OF THE BOTANICAL NAME TAGS, FURNISHED BY THE NURSERY STOCK PROVIDER SHALL REMAIN ATTACHED TO THE PLANTS UNTIL FINAL INSPECTION.

LANDSCAPE CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT IF STORM DRAINAGE FROM ADJACENT LANDSCAPE AREAS OR BUILDING DOWNSPOUTS WILL ADVERSELY AFFECT LANDSCAPED AREAS PER THE PLAN.

DECORATIVE BOULDERS SHALL BE BURIED 1/3 BELOW GRADE AND SHALL NOT OBSTRUCT VEHICULAR SIGHTLINES IF

PRIOR TO INSTALLING PLANTS OR GROUND COVER BROADCAST PREEN WEED PRE-EMERGENT IN ALL PLANTING AREAS PER MANUFACTURE RECOMMENDATIONS. www.preen.com

## NATIVE GRASS MANAGEMENT NOTE

ON-GOING MAINTENANCE RECOMMENDATIONS FOR NATIVE GRASS

WELL ESTABLISHED SEEDED LAWN SHALL BE A HEALTHY, WELL-ROOTED, EVEN-COLORED, AND FREE OF WEEDS, BARE AREAS, AND SURFACE IRREGULARITIES.

THE MATURE HEIGHT OF NATIVE GRASS IS EXPECTED TO BE MAINTAINED AT ABOUT 6" HIGH AND MOWED TO 3" ONCE ANNUALLY IN THE LATE WINTER OR EARLY SPRING, AND IRRIGATED ON REDUCED WATER SCHEDULE.

THE SUCCESS OF PERMANENT NATIVE GRASS SEEDING CAN RARELY BE EVALUATED ACCURATELY PRIOR TO THE END OF ITS SECOND FULL GROWING SEASON. SEEDING SUCCESS DEPENDS UPON CONTROL OF WEED COMPETITION DURING THE FIRST TWO GROWING SEASONS. IN ADDITION, THE SITE SHOULD BE MONITORED ANNUALLY FOR UNDESIRABLE PLANT SPECIES.

THE SITE SHOULD BE MONITORED FOR UNDESIRABLE PLANT SPECIES. IF WEED CONTROL NEEDS TO BE PERFORMED DURING THE FIRST YEAR OF PLANT GROWTH, UTILIZE ONE OF TWO METHODS. REGARDLESS OF WHICH METHOD OF WEED CONTROL IS USED, COMPLETE BEFORE FLOWERING OF WEED SEED HEADS. SINCE WEED SPECIES MAY DEVELOP MATURE SEED HEADS AT DIFFERENT TIME OF THE GROWING SEASON. WEED CONTROL EFFORTS WILL BE

- 1. HAND PULL NOXIOUS WEEDS, REMOVING AS MUCH OF THE ROOT SYSTEM AS POSSIBLE.
- 2. USE WEED EATERS TO SELECTIVELY CUT OFF THE SEED HEADS OF NOXIOUS WEEDS. USE SELECTIVE BROADLEAF HERBICIDE SUCH AS 2-4-D WITH A BACKPACK SPRAYER OR WICK APPLICATOR. BE CAREFUL NOT TO APPLY HERBICIDE ON MORE THAN ONE SQUARE FOOT IN ANY GIVEN AREA. CONTRACTOR TO NOTIFY OWNER'S AUTHORIZED REPRESENTATIVE OF ANY SUSPECTED SOIL PROBLEMS AT THE END OF THE FIRST GROWING SEASON. BROADBAND APPLICATIONS OF HERBICIDE CAN BE COMPLETED AFTER NATIVE GRASS SPECIES REACH MATURE HEIGHT.

# **UTILITIES NOTE**

VERIFY LOCATION AND DEPTH OF ALL UNDERGROUND UTILITIES PRIOR TO START OF WORK. CALL 811 FOR UTILITY LOCATES. TREE TRUNK PLACEMENT SHALL BE 6' MINIMUM DISTANCE FROM ANY GAS OR ELECTRIC AND 10' FROM GAS MAINS RATED AT 150PSI. FOR SANITARY SEWER AND WATER MAINLINES TREES SHALL NOT BE LOCATED WITHIN EASEMENTS AND WITHIN 15' OF ANY MAINLINE. ANY CONFLICT BETWEEN TREE LOCATIONS AND UTILITIES SHOWN ON PLANS SHALL BE RESOLVED WITH GENERAL CONTRACTOR PRIOR TO PLANTING. ALL ELECTRICAL VAULTS AND TRANSFORMERS SHALL BE KEPT CLEAR FROM PLANT MATERIAL PER COLORADO SPRINGS UTILITIES GUIDELINES "LANDSCAPING AROUND ELECTRICAL EQUIPMENT". SEE COLORADO SPRINGS UTILITIES CONSTRUCTION STANDARD DRAWINGS 18-302 FOR SPECIFIC CLEARANCE REQUIREMENTS. ALL SHRUBS TO BE LOCATED 3' CLEAR OF ALL FIRE HYDRANTS AT MATURE SIZE.

### DOCUMENT NOTE

RRESPECTIVE OF ANY OTHER TERM IN THIS DOCUMENT, LANDSCAPE ARCHITECT SHALL NOT CONTROL OR BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SCHEDULES, SEQUENCES OR PROCEDURES, OR FOR CONSTRUCTION SAFETY OR ANY OTHER RELATED PROGRAMS, OR FOR ANOTHER PARTIES' ERRORS OR OMISSIONS OR FOR ANOTHER PARTIES' FAILURE TO COMPLETE THEIR WORK OR SERVICES IN ACCORDANCE WITH LANDSCAPE ARCHITECT'S DOCUMENTS.

9

JAN OLORADO MEN & MEF O COUNTY,

ARKE

 $\bigotimes$ 


 $\triangleleft$ 

1102-22 9-12-22 PER COMMENTS 11-4-22 PER COMMENTS DRIGINAL DATE 9-1-22 RAWN BY

 $\overline{\mathsf{O}}$ 

**DETAILS AND NOTES** 

SHEET NO.

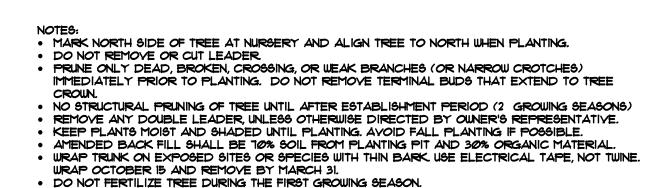

• COORDINATE WITH CITY FORESTRY FOR CURRENT INSECT & DISEASE RECOMMENDATIONS PRIOR TO PLANTING. -SET TREE PLUMB. STAKE AND TIE 1.5" CALIPER TREES WITH TWO POSTS ON THE WINDWARD AND LEEWARD SIDES. STAKE OVER 2" CALIPER WITH 3 EVENLY SPACED POSTS. USE NYLON STRAP WITH GROMMETS BELOW MIDPOINT OF TREE. TIGHTEN \*10 GUY WIRE BY TWISTING. PROTECT BRANCHES FROM TOUCHING WIRE. ALLOW A SLIGHT SAG FOR SWAY. PROVIDE FLAGGING TAPE 6" DANGLING. SET STAKES IN MINIMUM 18" FIRM SOIL. REMOVE

STAKES IN 12-18 MONTHS. -PLANT WITH BASE OF ROOT FLARE AT GRADE. (TRUNK FLARE MUST BE VISIBLE AT TOP OF ROOT BALL) -3" SPECIFIED ORGANIC MULCH IN TURF, WITH WOODY TRUNK-6" RADIUS.

SEEDED AREAS AND ALL ROCK MULCH AREAS. PROVIDE 3" PLANTING RIM FOR TREES IN NON-IRRIGATED SEED AREAS WITH SAUCER ON DOWNHILL SIDE OF ANY SLOPES. NO PLANTING RIM FOR TREES IN RRIGATED TURF. DEEP WATER AT PLANTING. KEEP MULCH FROM CONTACT -CUT AND REMOVE ALL BURLAP AND WIRE BASKETS FROM TOP 1/2 TO 2/3

OF ROOT FLARE. REMOVE ALL TREATED, BURLAP. AFTER TREE IS POSITIONED, REMOVE ALL TWINE, ROPE, PLASTIC AND RUBBER. -EXISTING SLOPE (WHERE APPLICABLE) PROPOSED GRADE (WHERE APPLICABLE) -NO RIM ON SLOPE CONDITION (THIS SIDE) -CULTIVATE SOIL TO DEPTH OF ROOT BALL THOROUGHLY. BACKFILL HOLE WITH AMENDED SOIL MIX. SCARIFY PLANTING PIT AND ROOTBALL. ROOT BALL SHALL REST ON FIRM,

UNDISTURBED SOIL.


DECIDUOUS TREE PLANTING DETAIL

- . DO NOT REMOVE OR CUT LEADER. • PRINE ONLY DEAD OR BROKEN BRANCHES IMMEDIATELY PRIOR TO PLANTING. REMOVE ANY DOUBLE LEADER, UNLESS OTHERWISE DIRECTED BY OWNER'S REPRESENTATIVE. • KEEP PLANTS MOIST AND SHADED UNTIL PLANTING.
- AVOID FALL PLANTING IF POSSIBLE. · AMENDED BACKFILL SHALL BE 10% SOIL FROM PLANTING PIT AND 30% ORGANIC MATERIAL • FOR ROOT BIND (CONTAINER PLANTS ONLY) AT BOTTOM OF BALL SPLIT ROOT BALL VERTICALLY FROM BOTTOM HALFWAY TO TOP. SPREAD THE TWO HALVES OVER A MOUND OF SOIL IN PLANTING PIT. FOR POT BOUND PLANTS ONLY: MAKE 4-5 VERTICAL CUTS IN ROOT BALL I" DEEP, PLANT IMMEDIATELY. (CONTAINER PLANTS ONLY)

-3" SPECIFIED ORGANIC MULCH IN TURF, SEEDED AREAS AND ALL ROCK MULCH AREAS. PROVIDE 3" PLANTING RIM FOR SHRUBS IN NON -IRRIGATED SEED AREAS WITH SAUCER ON DOWNHILL SIDE OF ANY SLOPES. NO PLANTING RIM FOR TREES IN IRRIGATED TURF. DEEP WATER AT PLANTING. KEEP MULCH FROM CONTACT WITH WOODY TRUNK-6" -SET SHRUB PLUMB, STAKE AND TIE 3" CALIPER SHRUBS WITH ONE POST ON THE WINDWARD AND LEEWARD SIDE ± USE NYLON STRAP WITH GROMMETS BELOW MIDPOINT OF SHRUB. TIGHTEN #10 GUY WIRE BY TWISTING. PROTECT BRANCHES FROM TOUCHING WIRE. ALLOW A SLIGHT SAG FOR SWAY. PROVIDE FLAGGING TAPE 6" DANGLING. SET STAKES IN MINIMUM 18" FIRM SOIL. -PLANT WITH BASE OF ROOT FLARE AT GRADE. REMOVE FROM CONTAINER OR IF APPLICABLE CUT AND REMOVE ALL BURLAP AND WIRE BASKETS FROM TOP 1/2 TO 2/3 OF ROOT FLARE. REMOVE ALL TREATED, BURLAP. AFTER SHRUB IS POSITIONED, REMOVE ALL TWINE, ROPE, PLASTIC AND RUBBER. - EXISTING SLOPE (WHERE APPLICABLE) PROPOSED GRADE (WHERE APPLICABLE) NO RIM ON SLOPE CONDITION (THIS SIDE)

CULTIVATE SOIL TO A DEPTH OF ROOT BALL THOROUGHLY. BACKFILL HOLE WITH AMENDED SOIL MIX. SCARIFY SIDES OF PLANTING PIT AND ROOT BALL. ROOT BALL SHALL REST ON FIRM, UNDISTURBED SOIL.

JPRIGHT EVERGREEN SHRUB PLANTING DETAIL

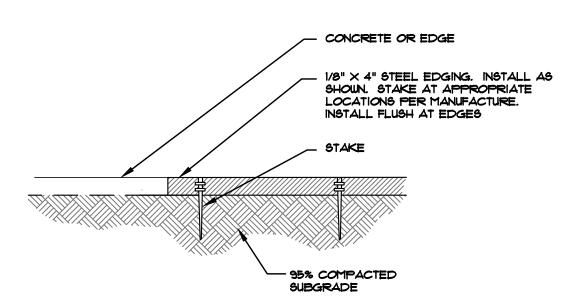

. MARK NORTH SIDE OF TREE AT NURSERY AND ALIGN TREE TO NORTH WHEN PLANTING.

• DO NOT REMOVE OR CUT LEADER. . PRUNE ONLY DEAD OR BROKEN BRANCHES IMMEDIATELY PRIOR TO PLANTING. • REMOVE ANY DOUBLE LEADER, UNLESS OTHERWISE DIRECTED BY OWNER'S REPRESENTATIVE. KEEP PLANTS MOIST AND SHADED UNTIL PLANTING. AVOID FALL PLANTING IF POSSIBLE.


• AMENDED BACKFILL SHALL BE 10% SOIL FROM PLANTING PIT AND 30% ORGANIC MATERIAL. • PINE AND SPRUCE TREES TO BE SPRAYED FOR IPS BARK BEETLE PRIOR TO PLANTING (SEE CONIFEROUS TREE NOTE ON PLANTING NOTES SHEET)

-3" SPECIFIED ORGANIC MULCH IN TURF, SEEDED AREAS AND ALL ROCK MULCH AREAS. PROVIDE 3" PLANTING RIM FOR TREES IN NON-IRRIGATED SEED AREAS WITH SAUCER ON DOWNHILL SIDE OF ANY SLOPES. NO PLANTING RIM FOR TREES IN IRRIGATED TURF. DEEP WATER AT PLANTING. KEEP MULCH FROM CONTACT WITH WOODY TRUNK-6" RADIUS. -SET TREE PLUMB, STAKE 6' TREES AND SMALLER WITH TWO POSTS SET ON WINDWARD AND LEEWARD SIDES + STAKE 6' HEIGHT AND GREATER WITH 3 METAL ANGLE IRONS, PLACED 120 DEGREES APART. USE NYLON STRAP WITH GROMMETS BELOW MIDPOINT OF TREE. TIGHTEN "10 GUY WIRE BY TWISTING. PROTECT BRANCHES FROM TOUCHING WIRE. ALLOW A SLIGHT SAG FOR SWAY. PROVIDE FLAGGING TAPE FOR VISIBILITY. SET STAKES IN MINIMUM 18" FIRM SOIL. REMOVE STAKES IN 12-18 MONTHS. -PLANT WITH BASE OF ROOT FLARE AT GRADE. (TRUNK FLARE MUST BE VISIBLE AT TOP OF -CUT AND REMOVE ALL BURLAP AND WIRE BASKETS FROM TOP 1/2 TO 2/3 OF ROOT FLARE. REMOVE ALL TREATED, BURLAP. AFTER TREE IS POSITIONED, REMOVE ALL TWINE, ROPE, PLASTIC AND RUBBER. EXISTING SLOPE (WHERE APPLICABLE) PROPOSED GRADE (WHERE APPLICABLE) -NO RIM ON SLOPE CONDITION (THIS SIDE) -CULTIVATE SOIL TO DEPTH OF ROOT BALL THOROUGHLY. BACKFILL HOLE WITH AMENDED SOIL MIX. SCARIFY PLANTING PIT AND ROOTBALL. ROOT

> SOIL. ROOT BALL SHALL REST ON FIRM, EVERGREEN TREE PLANTING DETAIL

BALL SHALL REST ON FIRM, UNDISTURBED

- MULCH SEE PLAN FOR 7 4-8" COBBLE EDGER. SET 1-2" BELOW GRADE -COBBLE ROCK WEED BARRIER WHERE SUBGRADE

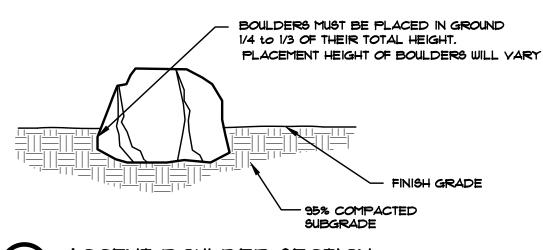

• PRUNE ONLY DEAD OR BROKEN BRANCHES IMMEDIATELY PRIOR TO PLANTING.

• KEEP PLANTS MOIST AND SHADED UNTIL PLANTING. • DO NOT FERTILIZE FOR AT LEAST ONE GROWING SEASON.

 AMENDED BACK FILL SHALL BE 10% SOIL FROM PLANTING PIT AND 30% ORGANIC MATERIAL. FOR ROOT BIND AT BOTTOM OF BALL SPLIT ROOT BALL VERTICALLY FROM BOTTOM HALFWAY

TO TOP. SPREAD THE TWO HALVES OVER A MOUND OF SOIL IN PLANTING PIT. • FOR POT BOUND PLANTS ONLY: MAKE 4-5 VERTICAL CUTS IN ROOT BALL I" DEEP. PLANT IMMEDIATELY.

-PROPOSED GRADE (WHERE APPLICABLE) -SET SHRUBS PLUMB. SHRUB SPACING AS PER THE PLANS. LAYOUT VARIES. FINISHED GRADE OF SHRUB BED TO BE 2" BELOW ADJACENT FINISH GRADE AT EDGE. -PLANT TOP OF ROOTBALL AT GRADE 3" SPECIFIED ORGANIC MULCH IN SHRUB BEDS, TURF, SEEDED AREAS AND ALL ROCK MULCH AREAS. PROVIDE 3" PLANTING RIM FOR SHRUBS NOT IN PLANTER BEDS OR IN NON-IRRIGATED SEED AREAS. PLACE SAUCER ON DOWNHILL SIDE OF ANY SLOPES. NO PLANTING RIM FOR SHRUBS IN IRRIGATED NATIVE TURF. DEEP WATER AT PLANTING. KEEP MULCH FROM CONTACT WITH WOODY TRUNK-2" RADIUS. LEXISTING SLOPE (WHERE APPLICABLE) -NO RIM ON SLOPE CONDITION (THIS SIDE) -REMOVE SHRUB FROM CONTAINER & CULTIVATE SOIL TO DEPTH OF ROOT 12" MIN. BALL THOROUGHLY. BACKFILL HOLE WITH AMENDED SOIL MIX. SCARIFY PLANT BED SIDES OF PLANTING PIT AND ROOT BALL. ROOT BALL SHALL REST ON FIRM, UNDISTURBED SOIL.


SHRUB PLANTING DETAIL

NOTES: • SHRUB AND TURF AREAS MAY YARY FROM DETAIL - SEE PLANS FOR ACTUAL LOCATIONS

• SEE PLANS FOR ROCK / COBBLE TYPE(S)

• WIDTH YARIES - SEE PLAN.

• SET ROCK RANDOM TO BE NATURALISTIC

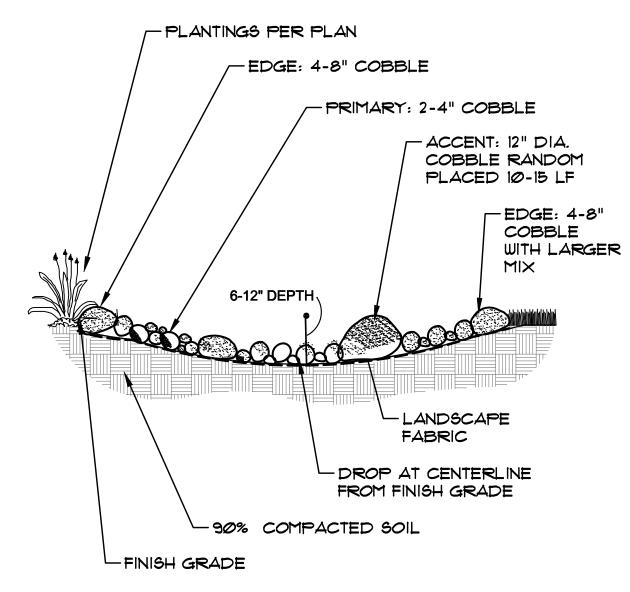

Chapter 5 Native Vegetation Requirements and Guidelines

Table 5-1. El Paso County Conservation District All-Purpose Mix for Upland, Transition and Permanent **Control Measure Areas** 

				Pounds PLS USE THIS MIX		
Common Name	Scientific Name	Growth Season / Form	% of Mix	<ul><li>Irrigated broadcast</li><li>Irrigated hydroseeded</li></ul>	Non-irrigated broadcast     Non-irrigated hydroseeded     Irrigated drilled	Non-irrigated drilled
				80 seeds/sq ft	40 seeds/sq ft	20 seeds/sq ft
Bluestem, big	Andropogon gerardii	Warm, sod	20	4.4	2.2	1.1
Grama, blue	Bouteloua gracilis	Warm, bunch	10	0.5	0.25	0.13
Green needlegrass <sup>2</sup>	Nassella viridula	Cool, bunch	10	2	1	0.5
Wheatgrass, western <sup>2</sup>	Pascopyrum smithii	Cool, sod	20	6.4	3.2	1.6
Grama, sideoats	Bouteloua curtipendula	Warm, bunch	10	2	1	0.5
Switchgrass <sup>2</sup>	Panicum virgatum	Warm, bunch/sod	10	0.8	0.4	0.2
Prairie sandreed	Calimovilfa longifolia	Warm, sod	10	1.2	0.6	0.3
Yellow indiangrass <sup>2</sup>	Sorghastrum nutans	Warm, sod	10	2	1	0.5
Seed rate (lbs PLS/acre)				19.3	9.7	4.8

<sup>1</sup>For portions of facilities located near or on the bottom or where wet soil conditions occur. Planting of potted nursery stock wetland plants 2-foot on-center is recommended for sites with wetland hydrology.

<sup>2</sup>Species that will do well in the bottom of pond areas

# **UTILITIES NOTE**

VERIFY LOCATION AND DEPTH OF ALL UNDERGROUND UTILITIES PRIOR TO START OF WORK. CALL 811 FOR UTILITY LOCATES. TREE TRUNK PLACEMENT SHALL BE 6' MINIMUM DISTANCE FROM ANY GAS OR ELECTRIC AND 10' FROM GAS MAINS RATED AT 150PSI. FOR SANITARY SEWER AND WATER MAINLINES TREES SHALL NOT BE LOCATED WITHIN EASEMENTS AND WITHIN 15' OF ANY MAINLINE. ANY CONFLICT BETWEEN TREE LOCATIONS AND UTILITIES SHOWN ON PLANS SHALL BE RESOLVED WITH GENERAL CONTRACTOR PRIOR TO PLANTING. ALL ELECTRICAL VAULTS AND TRANSFORMERS SHALL BE KEPT CLEAR FROM PLANT MATERIAL PER COLORADO SPRINGS UTILITIES GUIDELINES "LANDSCAPING AROUND ELECTRICAL EQUIPMENT". SEE COLORADO SPRINGS UTILITIES CONSTRUCTION STANDARD DRAWINGS 18-302 FOR SPECIFIC CLEARANCE REQUIREMENTS. ALL SHRUBS TO BE LOCATED 3' CLEAR OF ALL FIRE HYDRANTS AT MATURE SIZE.

DOCUMENT NOTE

RRESPECTIVE OF ANY OTHER TERM IN THIS DOCUMENT, LANDSCAPE ARCHITECT SHALL NOT CONTROL OR BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SCHEDULES, SEQUENCES OR PROCEDURES, OR FOR CONSTRUCTION SAFETY OR ANY OTHER RELATED PROGRAMS, OR FOR ANOTHER PARTIES' ERRORS OR OMISSIONS OR FOR ANOTHER PARTIES' FAILURE TO COMPLETE THEIR WORK OR SERVICES IN ACCORDANCE WITH LANDSCAPE ARCHITECT'S DOCUMENTS.

ARKE A & MERIDIAN OUNTY, COLORADO  $\mathbb{Z}$ ALCON

S

ROU

**H**5

1102-22

9-12-22 PER COMMENTS 11-4-22 PER COMMENTS DRIGINAL DATE 9-1-22 RAWN BY

**DETAILS AND NOTES** SHEET NO.

ō