

CS-22-003







67.1 acres per legal description

This does not meet intersection  
spacing off of a principal arterial.

west?

Indicate distance to this access  
from Dumont and/or RI/RO

Include s  
Stapleton

### Existing (2021) Traffic Volumes

Figure 3 shows the existing morning and afternoon peak-hour traffic volumes at the intersections of Stapleton/US Hwy 24, Stapleton/Eastonville, and Londonderry/Eastonville. The morning peak hour was assumed to occur for one hour between 6:30 a.m. and 8:30 a.m. The afternoon peak hour was assumed to occur for one hour between 4:00 p.m. and 6:00 p.m. These volumes are based on manual intersection turning-movement counts conducted by LSC in April 2021, October 2021, and April 2022. The count-data sheets are attached for reference.

### Existing Levels of Service

Level of service (LOS) is a quantitative measure of the level of delay at an intersection. Level of service is indicated on a scale from "A" to "F." LOS A represents control delay of less than 10 seconds for unsignalized and signalized intersections. LOS F represents control delay of more than 50 seconds for unsignalized intersections and more than 80 seconds for signalized intersections. Table 1 shows the level of service delay ranges.

**Table 1: Intersection Levels of Service Delay Ranges**

Level of Service	Signalized Intersections	Unsignalized Intersections
	Average Control Delay (seconds per vehicle)	Average Control Delay (seconds per vehicle) <sup>(1)</sup>
A	10 sec or less	10 sec or less
B	10-20 sec	10-15 sec
C	20-35 sec	15-25 sec
D	35-55 sec	25-35 sec
E	55-80 sec	35-50 sec
F	80 sec or more	50 sec or more

(1) For unsignalized intersections if V/C ratio is greater than 1.0 the level of service is LOS F regardless of the projected average control delay per vehicle.

Figure 3 presents the results of the existing intersection level of service analysis based on the unsignalized method of analysis procedures from the *Highway Capacity Manual, 6<sup>th</sup> Edition* by the Transportation Research Board. The peak-hour factors used for each approach are based on the traffic volumes for the peak fifteen minutes of the entire intersection. If the peak 15 minutes for an approach occurs during an interval other than the peak 15 minutes of the entire intersection, the suggested peak-hour value based on the total approach volume from Table 9-1 of the Synchro Studio 10 User Guide was used instead. The level of service reports are attached.

The eastbound and westbound left-turn and through lanes at the two-way, stop-sign-controlled intersection of US Hwy 24/Stapleton are currently operating at LOS E or LOS F during the peak hours.

Has output from this model  
been included in appendix?

Figure 5 is 2042  
Background Traffic

Does this scenario include the proposed  
improvements for Eastonville Road?

## 2042 BACKGROUND TRAFFIC

Figure 5 shows the projected 2042 background-traffic volumes. The small-area model was also used to develop these volumes. In addition to the developments assumed to be developed by 2026, the 2042 background traffic volumes assume buildout of the Meridian Ranch development including buildout of the proposed school site located north of Falcon High School, buildout of Waterbury, buildout of Grandview Reserve, buildout of Latigo Trails, and buildout of the area generally north of Rex Road between Eastonville Road and US Hwy 24 with 2 ½ acre residential lots. Buildout of all of these area developments may not occur within the next twenty years. The 2042 background-traffic estimates shown are therefore likely conservative. The 2042 background-traffic scenario assumes Stapleton Drive extended west to connect with the Briargate Parkway extension and Rex Road extended east through the future phases of Grandview Reserve to US Hwy 24.

Figure 5 also shows the lane geometry, traffic control, and level of service at the key area intersections, based on the 2042 background volumes.


## TRIP GENERATION

The site-generated vehicle trips were estimated using the nationally published trip-generation rates from *Trip Generation, 11th Edition, 2021* by the Institute of Transportation Engineers (ITE). Table 2 shows the trip-generation estimates. Table 2 also shows the trip-generation estimate for this same area from the *4-Way Ranch Updated Traffic Impact Analysis* by LSC dated January 29, 2009, for comparison.

The total number of vehicle trips generated has been reduced to account for the “pass by” phenomena. A pass-by trip is made by a motorist who would already be on the adjacent roadways regardless of the proposed development, but who stops in at the site while passing by. The motorist would then continue on his or her way to a final destination in the original direction. The pass-by percentages shown in Table 2 are from the Trip Generation Handbook - An ITE Proposed Recommended Practice, 3rd Edition, 2017 by ITE.

The initial phase is expected to generate about 2,606 new external vehicle trips on the average weekday, with about half entering and half exiting the site during a 24-hour period. During the morning peak hour, which generally occurs for one hour between 6:30 and 8:30 a.m., about 82 vehicles would enter and 46 vehicles would exit the site. During the afternoon peak hour, which generally occurs for one hour between 4:15 and 6:15 p.m., about 147 vehicles would enter and 166 vehicles would exit the site.

At buildout, 4-Way Ranch Commercial site is expected to generate about 15,600 new external vehicle trips on the average weekday, with about half entering and half exiting the site during a 24-hour period. This is about 4,457 fewer vehicle trips than was assumed in the 2009 PUD TIS. During the morning peak hour, which generally occurs for one hour between 6:30 and 8:30 a.m.,

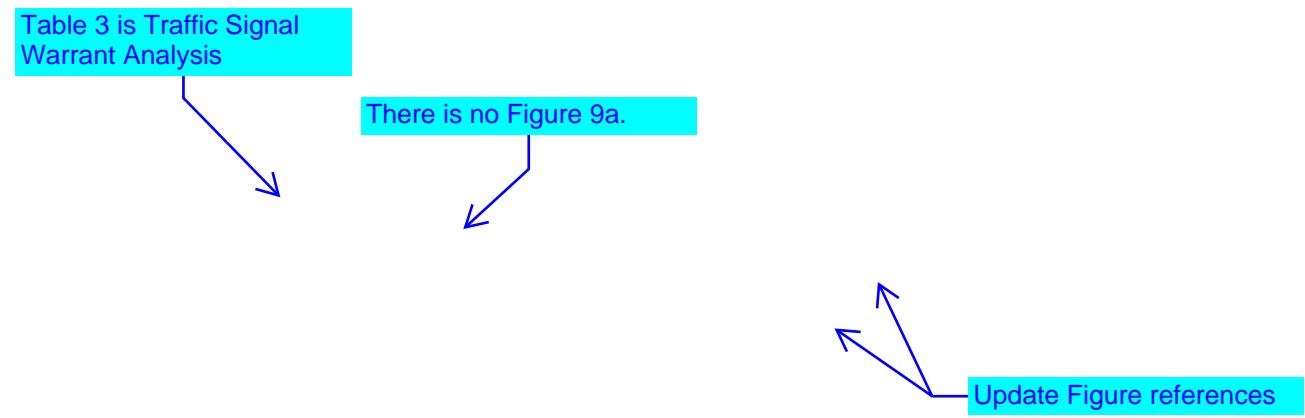

3

delete

2042



Was shopping center land use also considered at this intersection?

Based on the 2042 total traffic volumes, all of the eight hours analyzed are projected to meet the minimum thresholds for an Eight-Hour Vehicular-Volume Traffic-Signal Warrant and for a Four-Hour Vehicular-Volume Traffic-Signal Warrant.

### **Stapleton/US Hwy 24**

Table 5 shows the signal-warrant analysis for the intersection of Stapleton/US Hwy 24. The analysis assumes the minor approach includes the higher of either the southbound (Stapleton Drive) left-turn and through movements or northbound (Curtis Road) left-turn and through movements. This intersection currently only meets the thresholds for a Four-Hour Vehicular-Volume Traffic-Signal Warrant for three of the four required hours and only six of the required eight hours are anticipated to meet the minimum thresholds for an Eight-Hour Vehicular-Volume Traffic-Signal Warrant. A traffic-signal warrant is not projected to be met in the short-term with the addition of Phase 1 4-Way Ranch Commercial traffic only.

### **Potentially Reimbursable Improvements Under the MTCP Fee Program**

Nearby improvement projects potentially reimbursable under the Fee Program are (from *MTCP* Map No. 13):

- *MTCP* Project No. U19: Eastonville Road;
- *MTCP* Project No. N4: Rex Road (extended between Eastonville & US Highway 24)
- *MTCP* Project No C12: Stapleton Road;
- Also, potentially intersection improvements and traffic signals/roundabouts at major *MTCP* roadway intersections per fee-program guidelines
- Also, potentially intersection improvements and traffic signals (or CDOT traffic-signal escrows)/roundabouts at US Hwy 24 intersections with Rex Road and/or Stapleton Road per fee-program guidelines

### **ROADWAY CLASSIFICATION**

The future public roadways (unless developed as private roads) within the 4-Way Ranch development would potentially be classified as Urban Non-Residential Collector streets or Urban Local streets, depending on ADT volume, continuity, and other factors. This could be determined at the Preliminary Plan stage.

### **ROADWAY IMPROVEMENTS**

The attached Table 6 presents the “master-study-level” anticipated roadway improvements.

- Include discussion on safety and accident analysis
- Sight distance evaluation & recommendations
- Locations & requirements for turn & accel/decel lanes


## Tables 2-6

---

DRAFT



Per legal description, total project area is 67.1 acres. Areas assumed only account for 61.4 acres. Please include additional 5.7 acres for calculations



**Table 3**  
**Traffic Signal Warrant Analysis**  
Saybrook Drive/Stapleton Drive

**Table 4**  
**Traffic Signal Warrant Analysis**  
Dumont Drive/Stapleton Drive

**Table 5**  
**Traffic Signal Warrant Analysis**  
US 24/Stapleton Drive

Hour	Major <sup>(2)</sup> US 24	Minor 1 <sup>(3)</sup> Stapleton SE	Minor 2 <sup>(3)</sup> Stapleton NE	Warrant Analysis <sup>(1)</sup>											
				Warrant 1: Eight Hour Vehicular Volume Evaluation								Warrant 2: Four Hour Vehicular Volume Evaluation			
				Warrant Thresholds				Warrant Threshold Met?				70% Warrant Threshold Minor Minimum	Warrant Threshold Met?		
				Condition A (70%)		Condition B (70%)		Condition A		Condition B			NB	SB	NB
<b>Existing Traffic</b>				Major	Minor	Major	Minor	NB	SB	NB	SB				
6:45 - 7:45 am	857	198	79	420	140	630	70	Yes	No	Yes	Yes	91	Yes	No	
7:30 - 8:30 am	706	112	47	420	140	630	70	No	No	Yes	No	138	No	No	
11:00 am - 12:00 pm	739	32	28	420	140	630	70	No	No	No	No	126	No	No	
12:00 - 1:00 pm	692	42	37	420	140	630	70	No	No	No	No	143	No	No	
2:15 - 3:15 PM	782	56	72	420	140	630	70	No	No	No	Yes	111	No	No	
3:15 - 4:15 PM	1037	83	131	420	140	630	70	No	No	Yes	Yes	80	Yes	Yes	
4:15 - 5:15 PM	977	67	124	420	140	630	70	No	No	Yes	Yes	80	No	Yes	
5:15 - 6:15 PM	939	74	92	420	140	630	70	No	No	Yes	Yes	80	No	Yes	
								1	6				3		
								No	No				No		
<b>2026 Background Traffic</b>															
6:45 - 7:45 am	858	199	80	420	140	630	70	Yes	No	Yes	Yes	91	Yes	No	
7:30 - 8:30 am	707	112	48	420	140	630	70	No	No	Yes	No	138	No	No	
11:00 am - 12:00 pm	742	33	28	420	140	630	70	No	No	No	No	125	No	No	
12:00 - 1:00 pm	697	43	37	420	140	630	70	No	No	No	No	141	No	No	
2:15 - 3:15 PM	783	57	73	420	140	630	70	No	No	Yes	Yes	111	No	No	
3:15 - 4:15 PM	1038	84	132	420	140	630	70	No	No	Yes	Yes	80	Yes	Yes	
4:15 - 5:15 PM	978	68	125	420	140	630	70	No	No	Yes	Yes	80	No	Yes	
5:15 - 6:15 PM	940	75	93	420	140	630	70	No	No	Yes	Yes	80	No	Yes	
								1	6				3		
								No	No				No		
<b>2026 Total Traffic</b>															
6:45 - 7:45 am	873	212	83	420	140	630	70	Yes	No	Yes	Yes	87	Yes	No	
7:30 - 8:30 am	707	112	52	420	140	630	70	No	No	Yes	No	138	No	No	
11:00 am - 12:00 pm	742	33	33	420	140	630	70	No	No	No	No	125	No	No	
12:00 - 1:00 pm	697	43	43	420	140	630	70	No	No	No	No	141	No	No	
2:15 - 3:15 PM	783	57	78	420	140	630	70	No	No	No	Yes	111	No	No	
3:15 - 4:15 PM	1038	84	137	420	140	630	70	No	No	Yes	Yes	80	Yes	Yes	
4:15 - 5:15 PM	978	68	130	420	140	630	70	No	No	No	Yes	80	No	Yes	
5:15 - 6:15 PM	940	75	98	420	140	630	70	No	No	Yes	Yes	80	No	Yes	
								1	6				3		
								No	No				No		
<b>Notes:</b>															
(1) Thresholds are based on 2 or more lanes on the major approach and 2 or more lanes on the minor approach with the 70% factor applied for a posted speed limit above 40 mph															
(2) The major street traffic includes all movements (left, through, and right)															
(3) The minor street traffic includes left and through volumes from the minor street															

**Table 6**  
**Roadway Improvements**  
4-Way Ranch Commercial

Item #	Improvement	Trigger	Timing	Responsibility
<b>Roadway Segment Improvements</b>				
1	Stapleton Drive - US Hwy 24 to Eastonville Road complete southern (eastbound) half	average daily traffic > 18,000 vehicles per day	Shown in 2040 MTCP	4-Way Ranch Metro District east of Eastonville Road (El Paso County west of Eastonville Road)
2	Widen US Hwy 24 to provide two lanes in each direction	dependent on CDOT funding priorities	Shown in US Highway 24 PEL Study; 2040 MTCP	CDOT
<b>Eastonville/Stapleton</b>				
3	Reconstruct as modern roundabout	- - -	Short-Term (under design)	PPRTA Eastonville Phase 1 Project/El Paso County
<b>Stapleton/Saybrook Intersection</b>				
4	Construct a westbound left-turn lane on Stapleton Dr approaching Saybrook. This lane should be 375 feet long plus a 200-foot taper.	westbound left-turn volume > 10 vph	With development of 4-Way Ranch parcels south of Stapleton and west of the drainage area	4-Way Ranch Commercial
5	Construct an eastbound right-turn deceleration lane on Stapleton Dr approaching Saybrook Dr. This lane should be 235 feet long plus a 200-foot taper.	eastbound right-turn volume > 25 vph	With development of 4-Way Ranch parcels south of Stapleton and west of the drainage area	4-Way Ranch Commercial
6	Construct an eastbound right-turn acceleration lane on Stapleton Dr at Saybrook Dr. This lane should be 760 feet long plus a 180-foot taper.	northbound right-turn volume > 50 vph	With development of 4-Way Ranch parcels south of Stapleton and west of the drainage area	4-Way Ranch Commercial
7	Construct an eastbound left-turn lane on Stapleton Dr approaching Saybrook Dr. This lane should be 335 feet long plus a 200-foot taper.	eastbound left-turn volume > 10 vph	With Waterbury Filing Nos. 1 and 2	Waterbury Phase 1
8	Construct a westbound right-turn deceleration lane on Stapleton Dr approaching Saybrook Dr. This lane should be 235 feet long plus a 200-foot taper.	westbound right-turn volume > 25 vph	With Waterbury Filing Nos. 1 and 2	Waterbury Phase 1
9	Construct a westbound right-turn acceleration lane on Stapleton Dr at Saybrook Dr. This lane should be 760 feet long plus a 180-foot taper.	southbound right-turn volume > 50 vph	With Future Waterbury Filings	Waterbury Phase 1
10	Convert from Two-Way, Stop-Sign Control to Signal Control	When Traffic Signal Warrant(s) are met. The decision on timing of traffic signal installation rests with El Paso County	Future	4-Way Ranch Commercial and Waterbury
<b>Stapleton/Dumont Intersection</b>				
11	Construct a westbound left-turn lane on Stapleton Dr approaching Dumont Dr. This lane should be 315 feet long plus a 200-foot taper.	westbound left-turn volume > 10 vph	With development of 4-Way Ranch parcels south of Stapleton and west of the drainage area	4-Way Ranch Commercial
12	Construct an eastbound right-turn deceleration lane on Stapleton Dr approaching Dumont Dr. This lane should be 235 feet long plus a 200-foot taper.	eastbound right-turn volume > 25 vph	With development of 4-Way Ranch parcels south of Stapleton and west of the drainage area	4-Way Ranch Commercial
13	Construct an eastbound right-turn acceleration lane on Stapleton Dr at Saybrook. This lane should be 760 feet long plus a 180-foot taper.	northbound right-turn volume > 50 vph	With development of 4-Way Ranch parcels south of Stapleton and west of the drainage area	4-Way Ranch Commercial
14	Construct an eastbound left-turn lane on Stapleton Dr approaching Dumont Dr. This lane should be 375 feet long plus a 200-foot taper.	eastbound left-turn volume > 10 vph	With future Waterbury Phases or with development of 4-Way Ranch parcels north of Stapleton; potential other development participation, such as if development occurs on the adjacent parcel(s).	4-Way Ranch Commercial and/or Waterbury
15	Construct a westbound right-turn deceleration lane on Stapleton Dr approaching Dumont DR. This lane should be 235 feet long plus a 200-foot taper (or continuous right turn accel/decel. lane).	westbound right-turn volume > 25 vph	With future Waterbury Phases or with development of 4-Way Ranch parcels north of Stapleton; potential other development participation, such as if development occurs on the adjacent parcel(s).	4-Way Ranch Commercial and/or Waterbury
16	Construct a westbound right-turn acceleration lane on Stapleton Dr at Dumot Dr. This lane should be 760 feet long plus a 180-foot taper (or continuous right turn accel/decel. lane)	southbound right-turn volume > 50 vph	With future Waterbury Phases or with development of 4-Way Ranch parcels north of Stapleton; potential other development participation, such as if development occurs on the adjacent parcel(s).	4-Way Ranch Commercial or Waterbury
17	Convert from Two-Way, Stop-Sign Control to Signal Control	When Traffic Signal Warrant(s) are met. The decision on timing of traffic signal installation rests with El Paso County	With future Waterbury Phases or with development of 4-Way Ranch parcels north of Stapleton; potential other development participation, such as if development occurs on the adjacent parcel(s).	4-Way Ranch Commercial and/or Waterbury
<b>Stapleton/US Hwy 24 Intersection</b>				
18	Convert from Two-Way, Stop-Sign Control to Signal Control	When Traffic Signal Warrant(s) are met. The decision on timing of traffic signal installation rests with the Colorado Department of Transportation	Anticipated in the short-term but likely beyond initial phase of 4-Way Ranch Commercial. It is our understanding that this is on the CDOT list of intersections planned for signalization.	CDOT; along with any available escrow collected from area developments through the access permitting process, including those within this 4 Way Ranch commercial development
19	Add northeast-bound dual left-turn lane	As needed with future developments (Will require Stapleton Drive to be widened to two westbound through lanes between US Hwy 24 and Dumont Dr)	At buildout of 4-Way Ranch Commercial initial phase, Grandview Reserve Phase 1 and the Meridian Ranch Sketch Plan 2021 Amendment Area	Area developments as required or potentially escrow participation toward future improvements.
20	Add other dual left-turn lanes	As needed with future developments (Will require Items Stapleton and US Hwy 24 widened to two through lanes in all directions)	Future	Area developments as required
21	Potential long-term capacity upgrades (ughandle, a Jr Interchange, etc.)	When level of service degrades below acceptable levels	Shown in US Highway 24 PEL Study;	CDOT; along with any available escrow collected from area developments, including this project, through the access permitting process.

Source: LSC Transportation Consultants, Inc. (Sept 2022)

## **Figures 1-10**

---

DRAFT



Label Hodgen Road

Update project name




Show stop signs on plan  
(All figures)



CDOT has a 2021 count



Use a different symbol for roundabout.  
Easily confused with circle indicating  
intersection (all Figures)



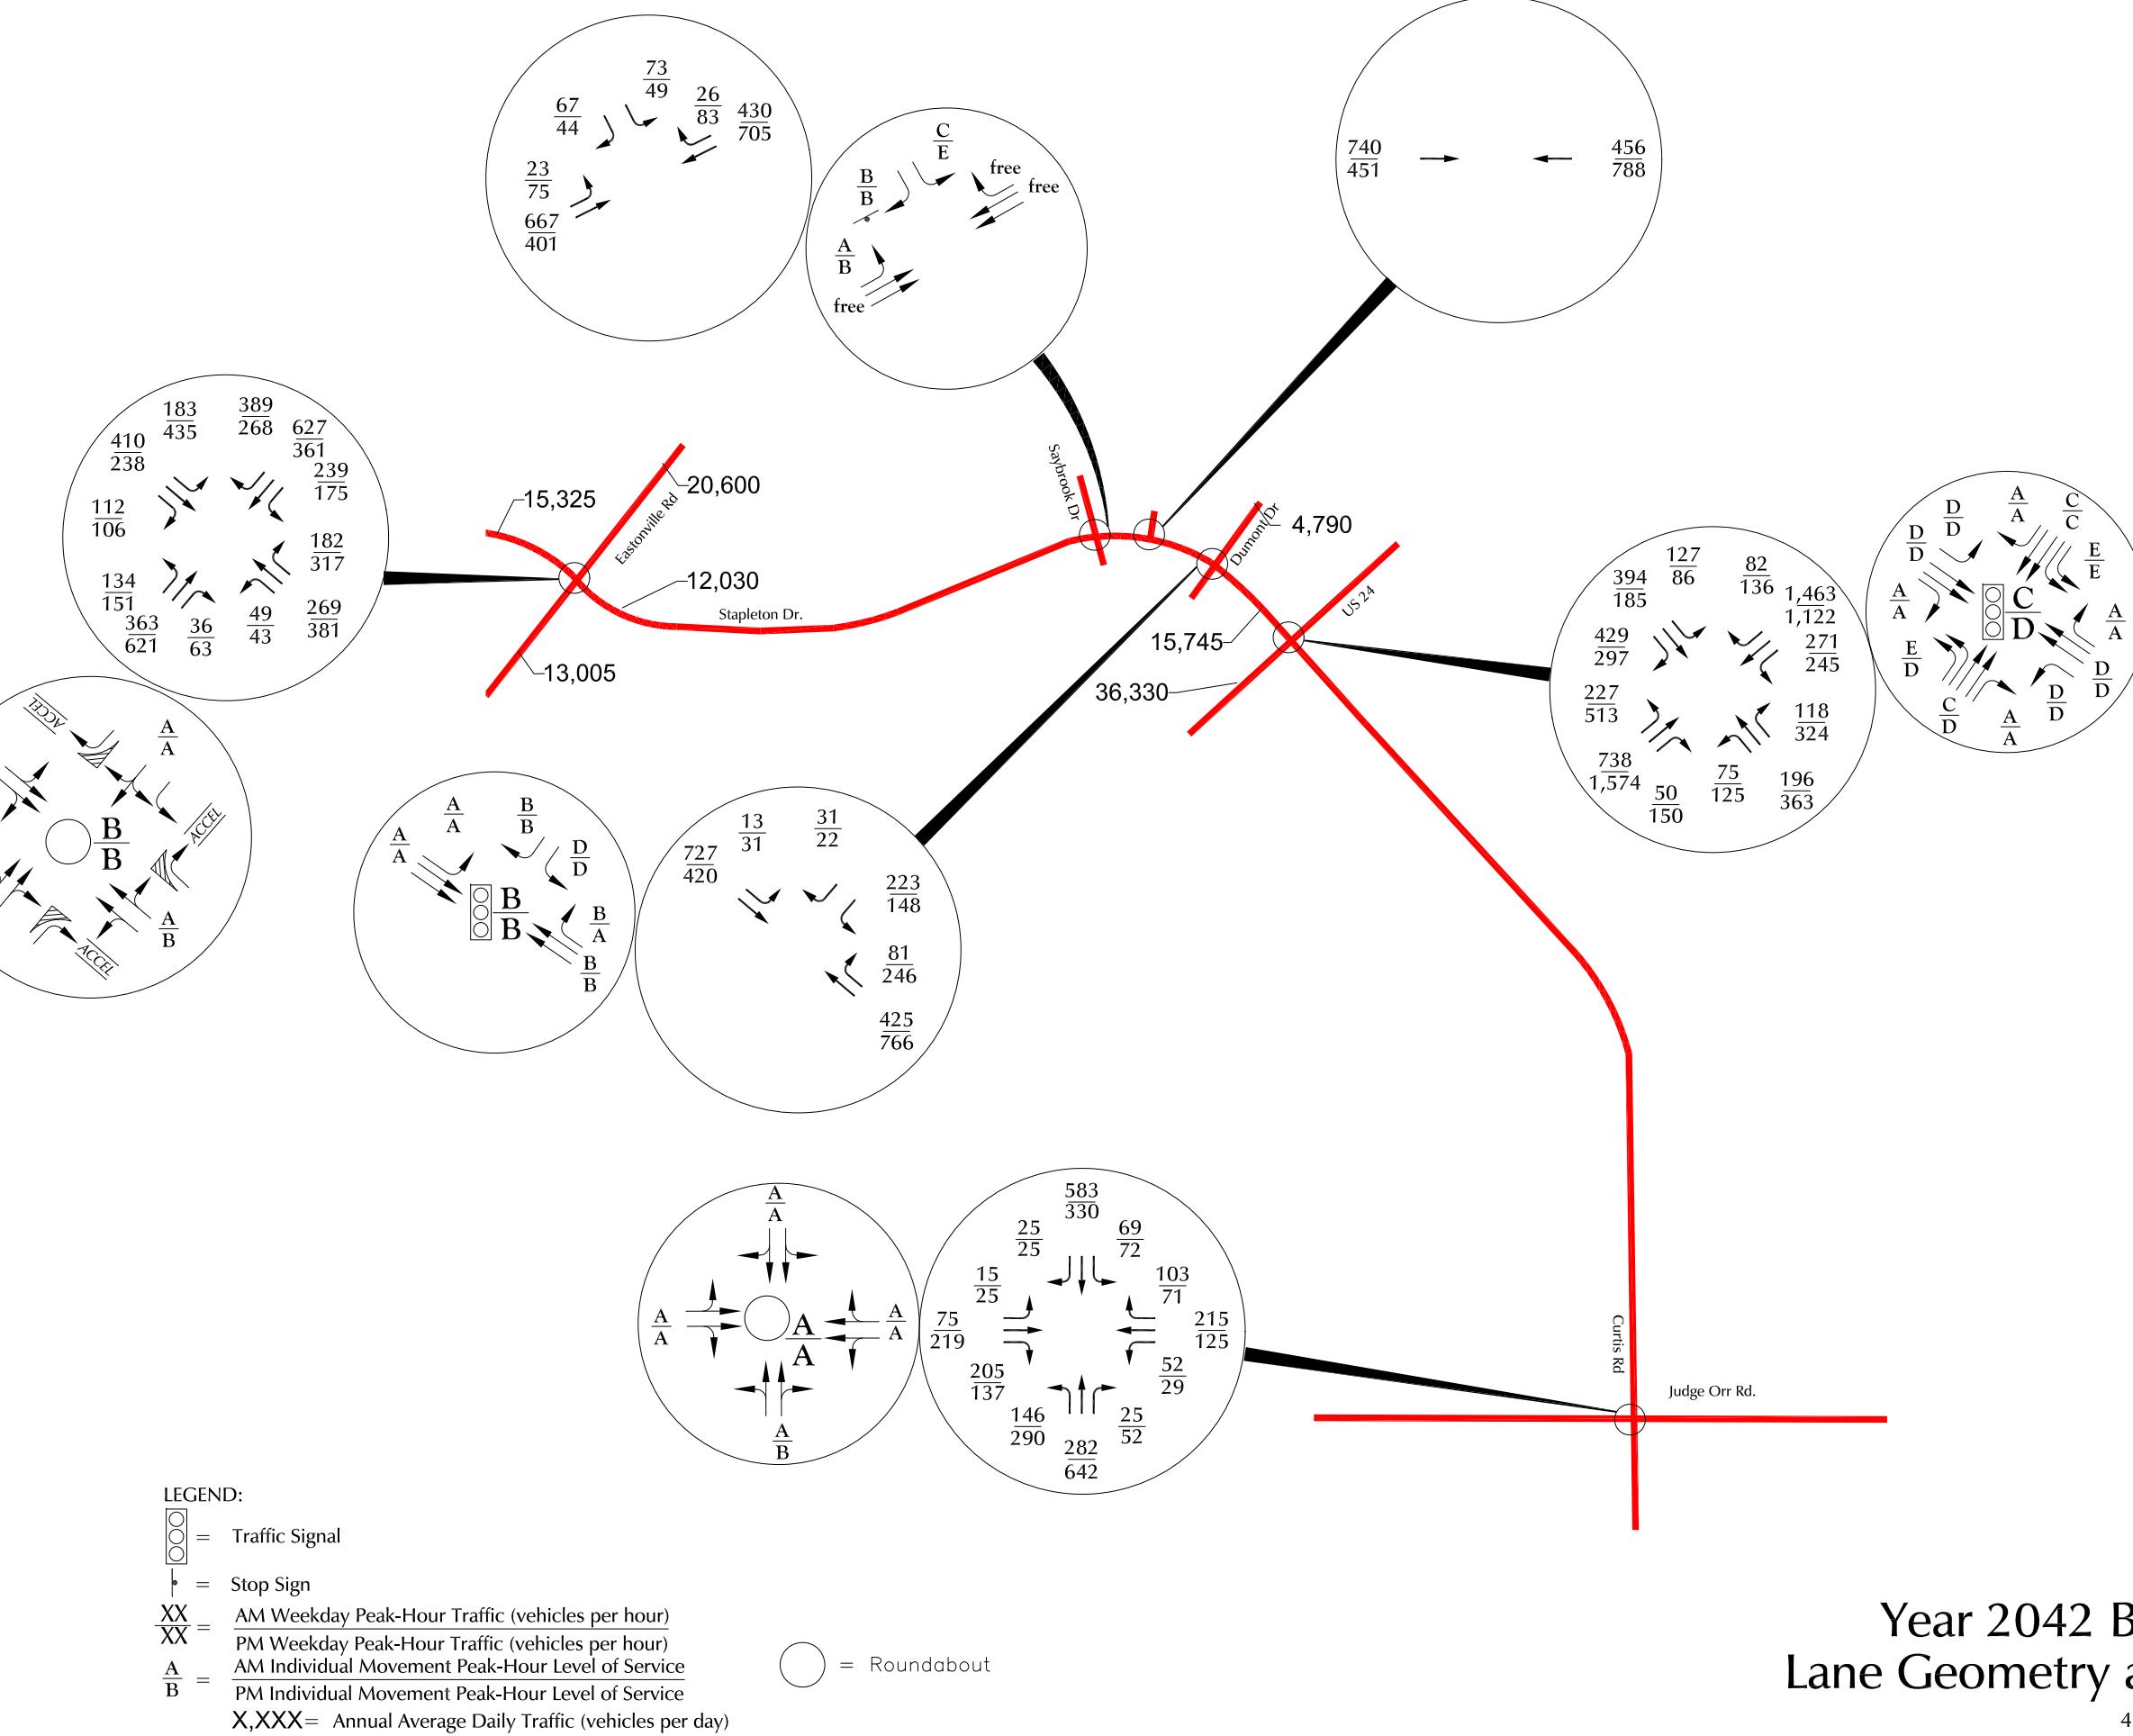


Figure 5  
Year 2042 Background Traffic,  
Lane Geometry and Traffic Control

4-Way Ranch Commercial (LSC# S224450)



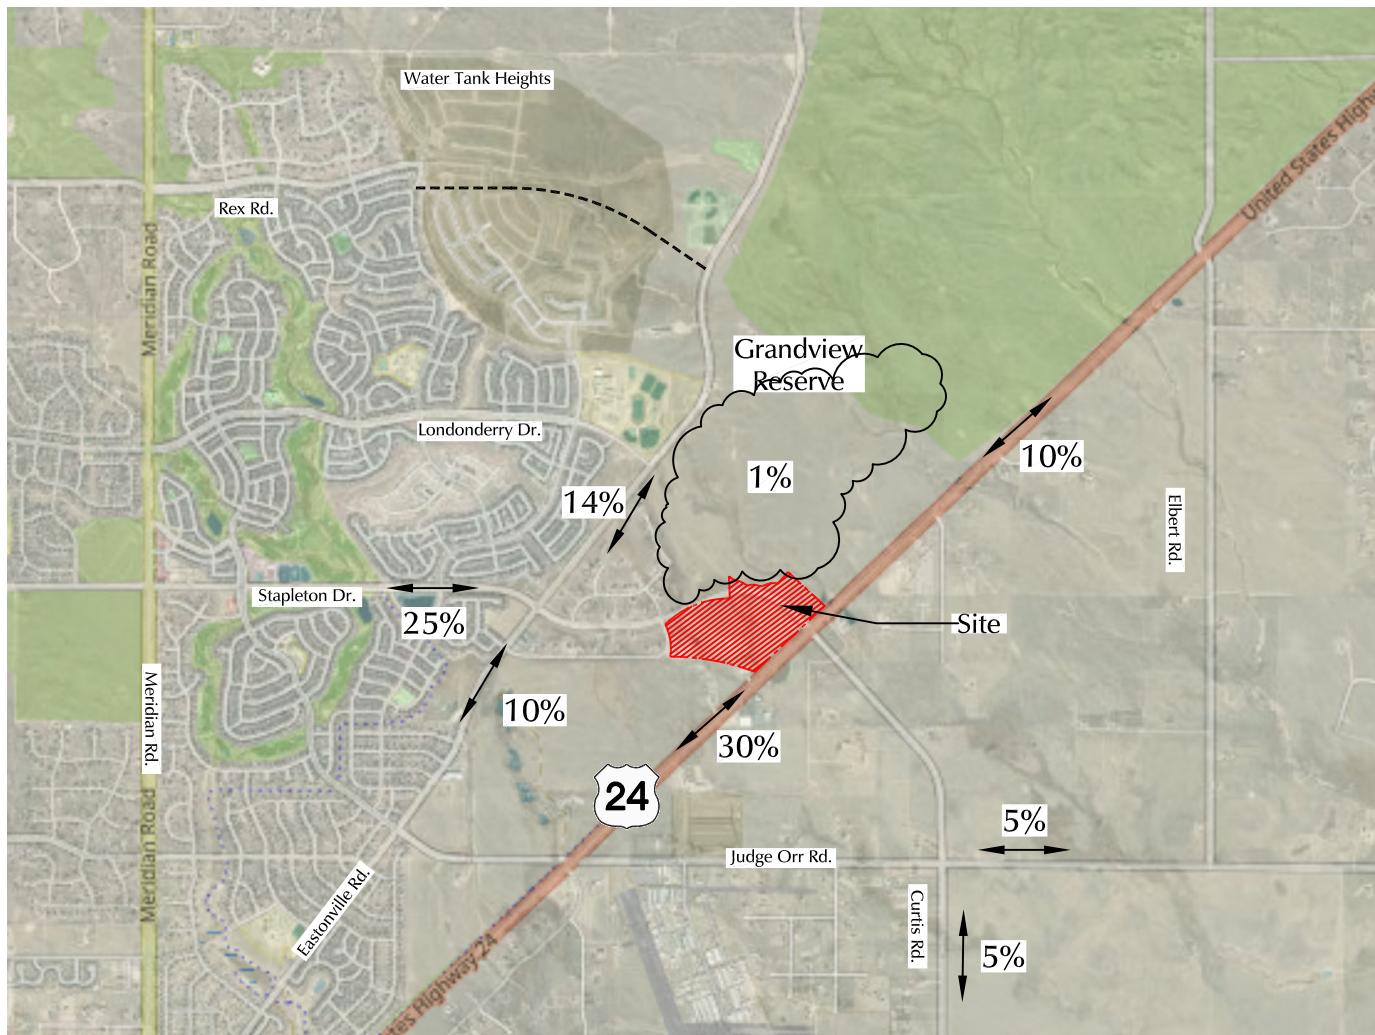


Figure 6  
**Directional Distribution  
of Site-Generated Traffic**

4-Way Ranch Commercial (LSC# S224450)

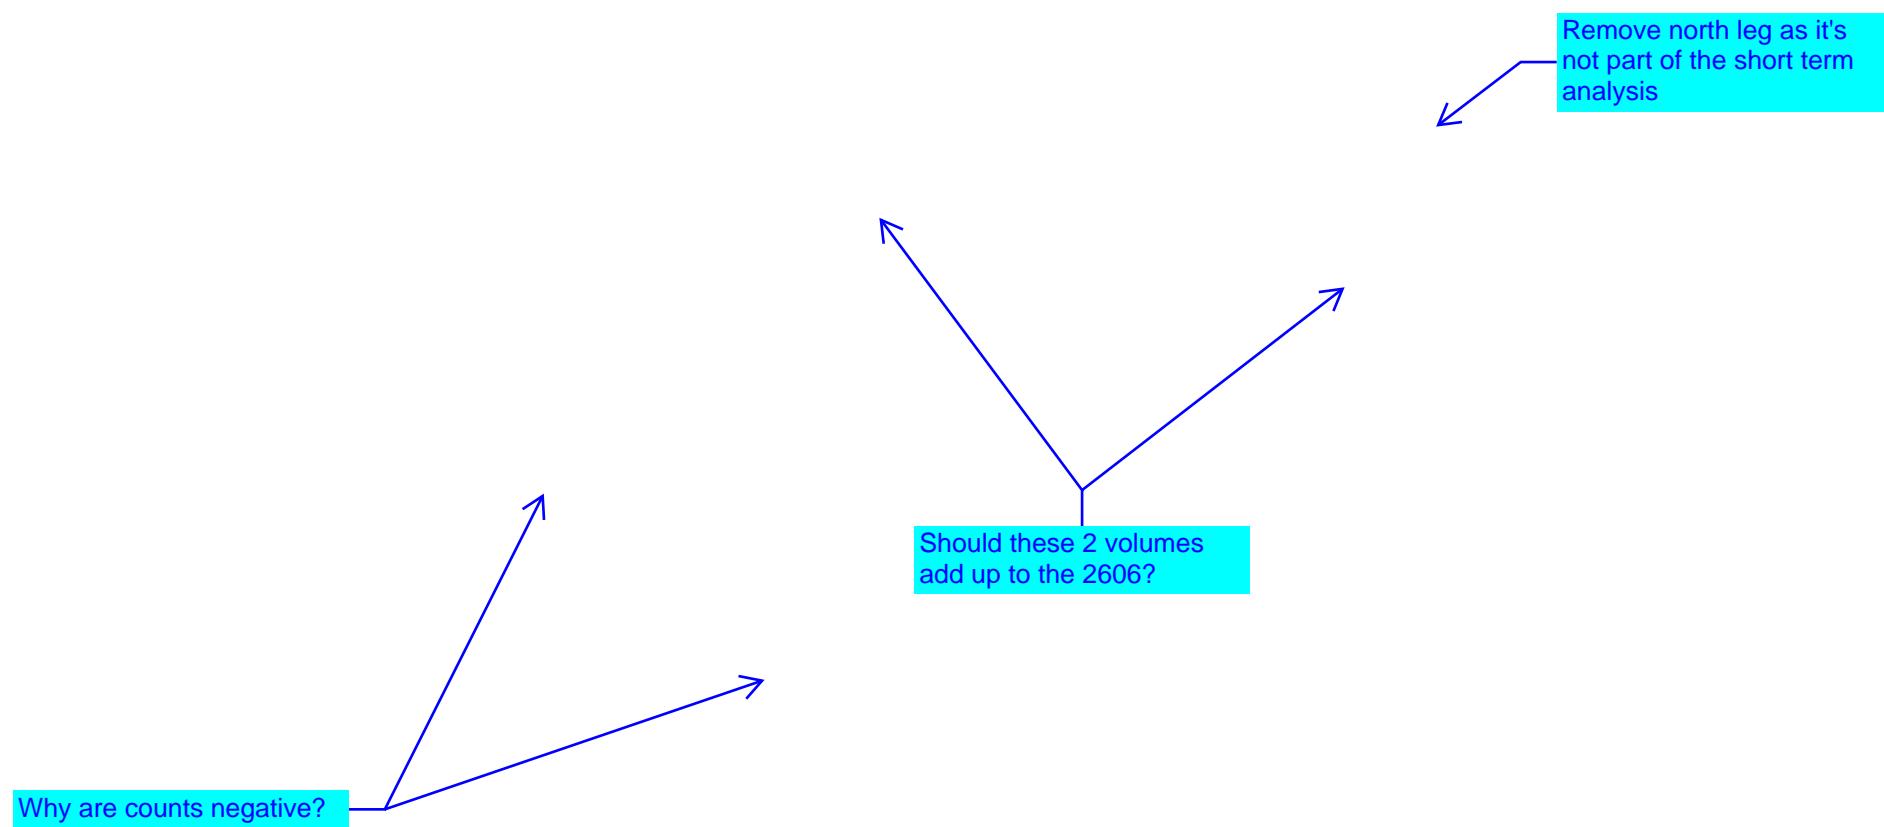


Should these 2 volumes  
add up to the 11143?

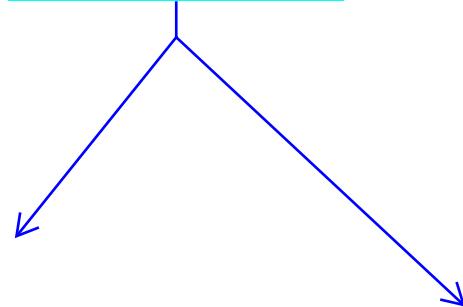

I did not get this  
volume. Please verify

Remove north leg as it's  
not part of the short term  
analysis

Why are the counts from  
Figure 7 not shown for  
these 2 intersections?

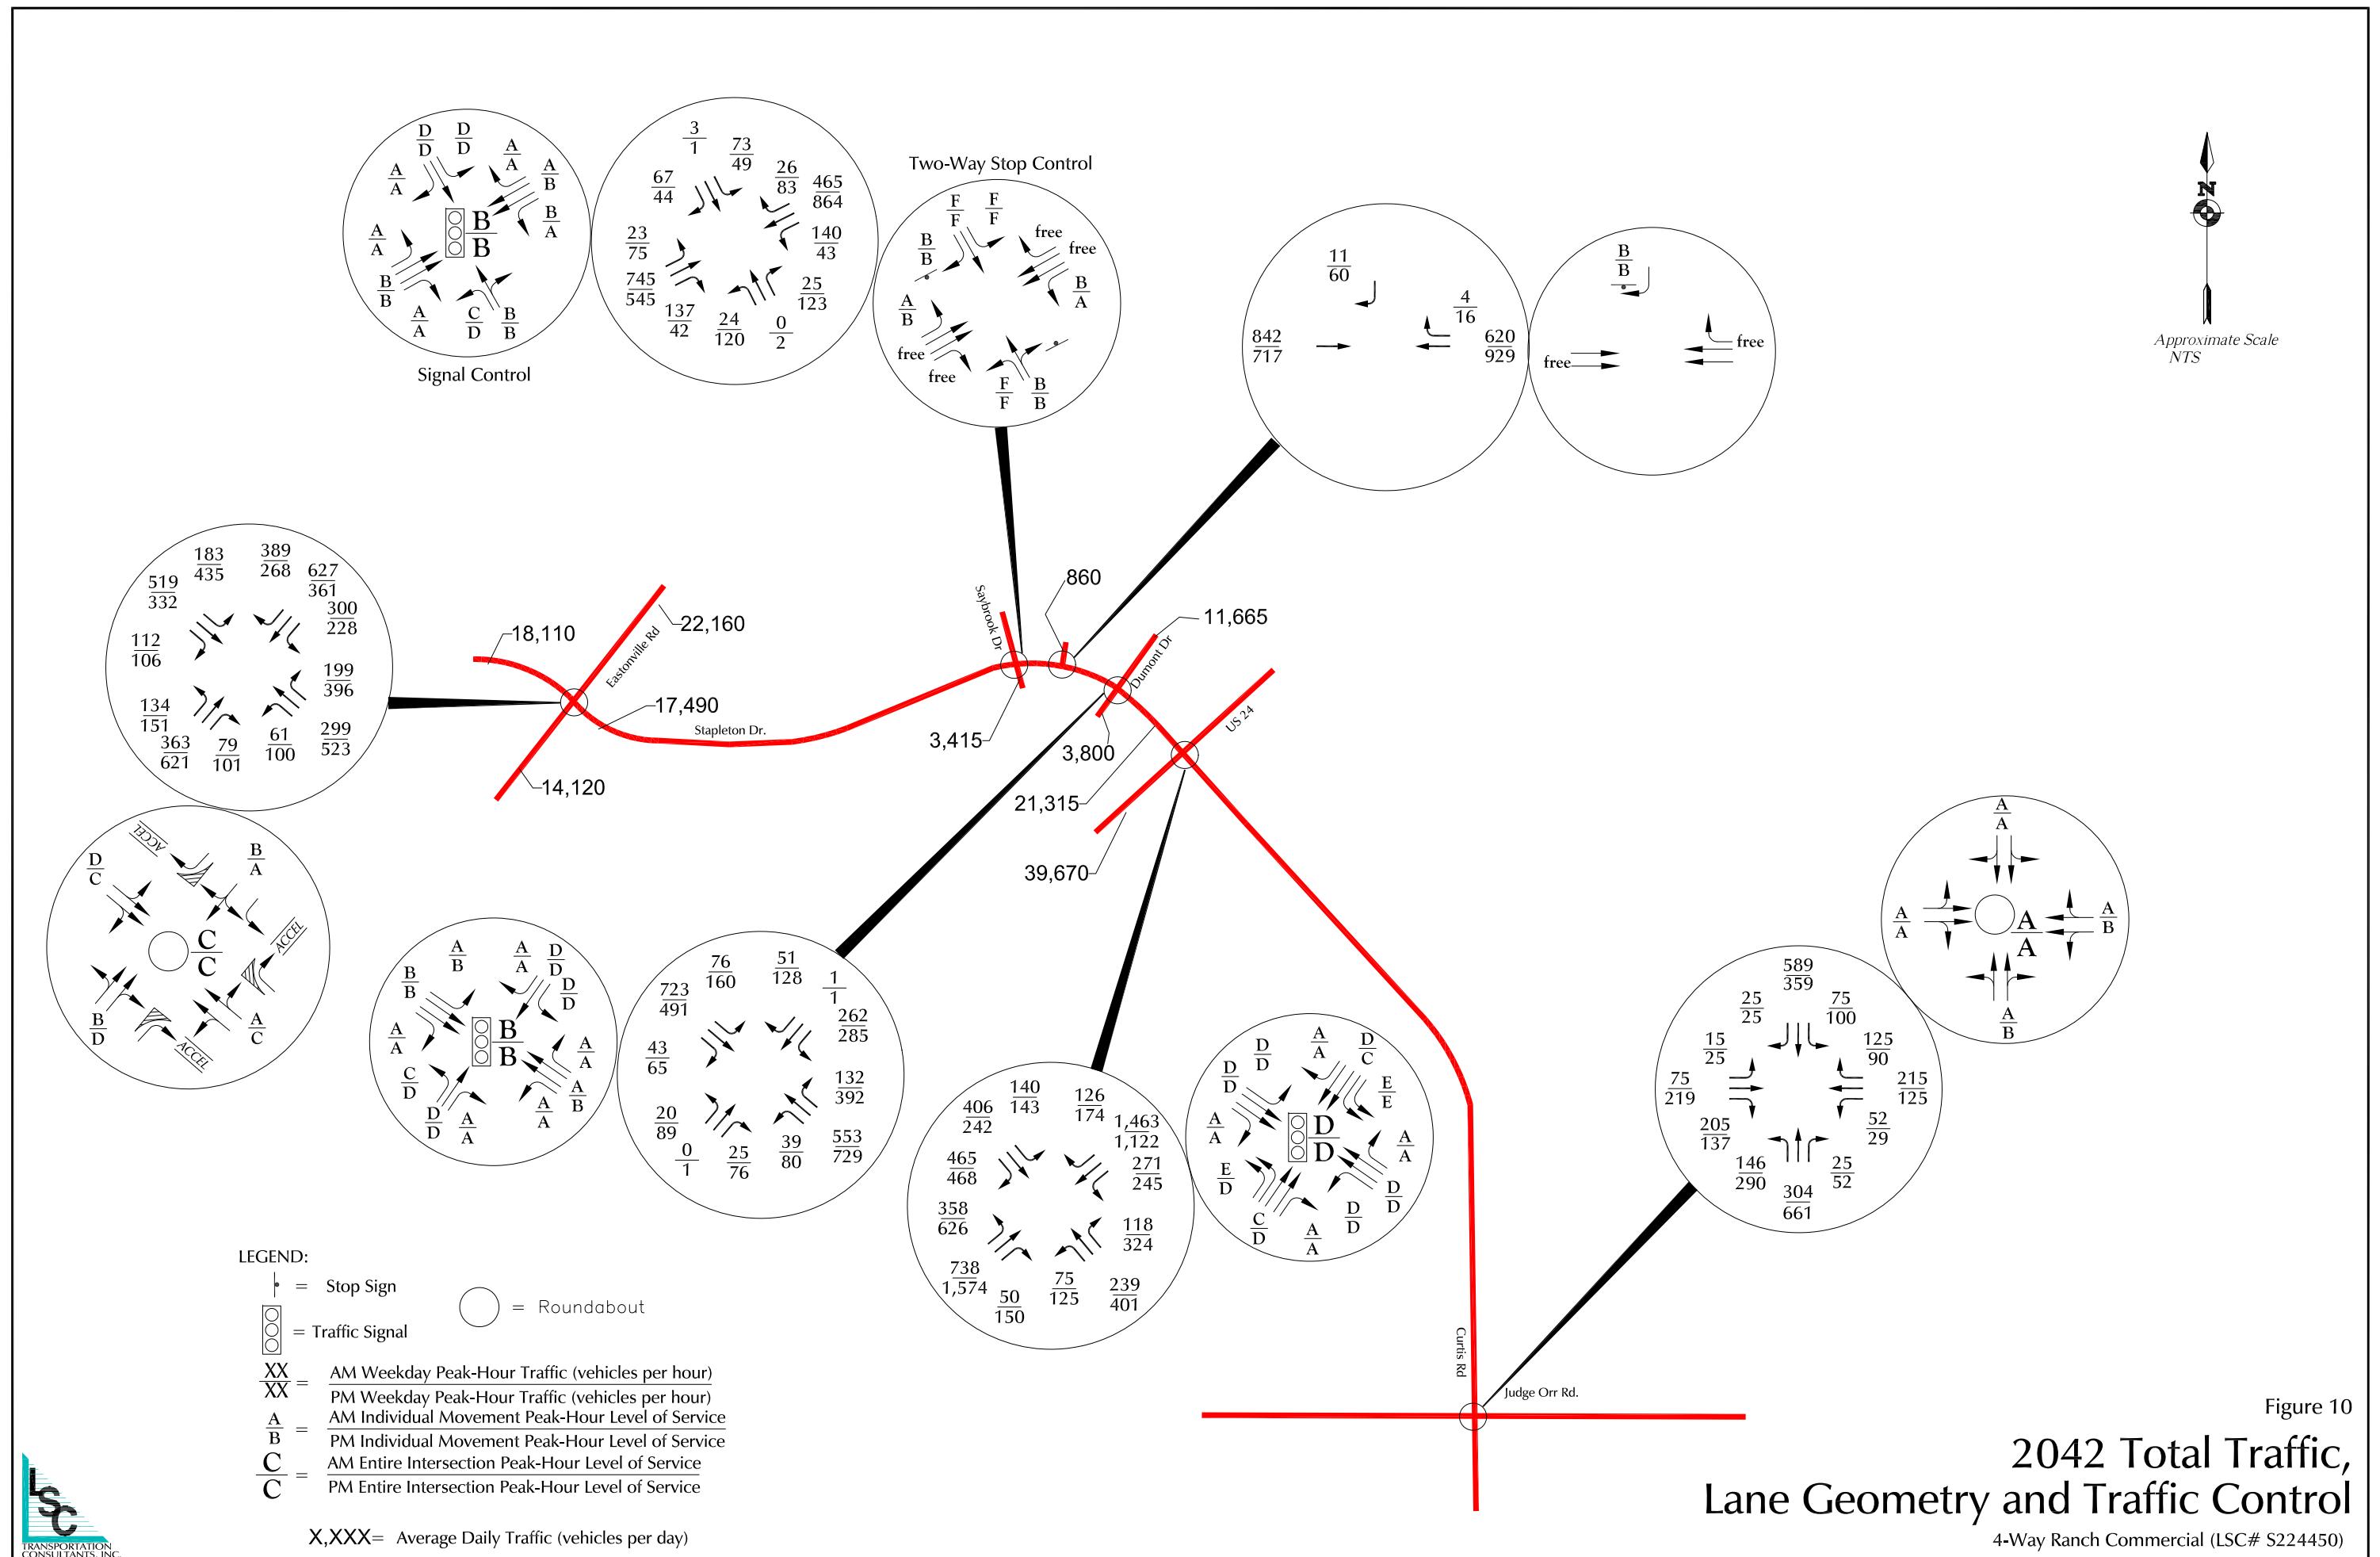

# Traffic Counts

---

DRAFT



# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304

Colorado Springs, CO 80909

719-633-2868

File Name : Eastonville Rd - Stapleton Rd AM  
 Site Code : S214870  
 Start Date : 10/7/2021  
 Page No : 1


## Groups Printed- Unshifted

Start Time	Eastonville Rd Southbound					Stapleton Rd Westbound					Eastonville Rd Northbound					Stapleton Rd Eastbound					Int. Total
	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	
06:30 AM	29	8	0	0	37	0	18	8	0	26	2	14	0	0	16	3	32	2	0	37	116
06:45 AM	36	19	2	0	57	0	11	20	0	31	5	18	1	0	24	5	51	8	0	64	176
Total	65	27	2	0	94	0	29	28	0	57	7	32	1	0	40	8	83	10	0	101	292
07:00 AM	31	36	6	0	73	0	16	43	0	59	13	76	2	0	91	2	27	6	0	35	258
07:15 AM	48	67	4	0	119	3	25	34	0	62	33	69	3	0	105	3	36	13	0	52	338
07:30 AM	24	31	2	0	57	3	42	13	0	58	32	24	11	0	67	2	45	15	0	62	244
07:45 AM	15	17	0	0	32	0	20	8	0	28	16	14	1	1	32	0	36	15	0	51	143
Total	118	151	12	0	281	6	103	98	0	207	94	183	17	1	295	7	144	49	0	200	983
08:00 AM	11	14	1	1	27	2	20	11	0	33	8	10	1	0	19	1	24	12	0	37	116
08:15 AM	23	10	0	1	34	1	18	12	0	31	18	9	0	0	27	2	12	11	0	25	117
08:30 AM	12	8	2	0	22	0	18	6	0	24	4	6	2	0	12	3	21	3	0	27	85
Grand Total	229	210	17	2	458	9	188	155	0	352	131	240	21	1	393	21	284	85	0	390	1593
Apprch %	50	45.9	3.7	0.4		2.6	53.4	44	0		33.3	61.1	5.3	0.3		5.4	72.8	21.8	0		
Total %	14.4	13.2	1.1	0.1	28.8	0.6	11.8	9.7	0	22.1	8.2	15.1	1.3	0.1	24.7	1.3	17.8	5.3	0	24.5	

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304  
Colorado Springs, CO 80909  
719-633-2868

File Name : Eastonville Rd - Stapleton Rd AM  
Site Code : S214870  
Start Date : 10/7/2021  
Page No : 3

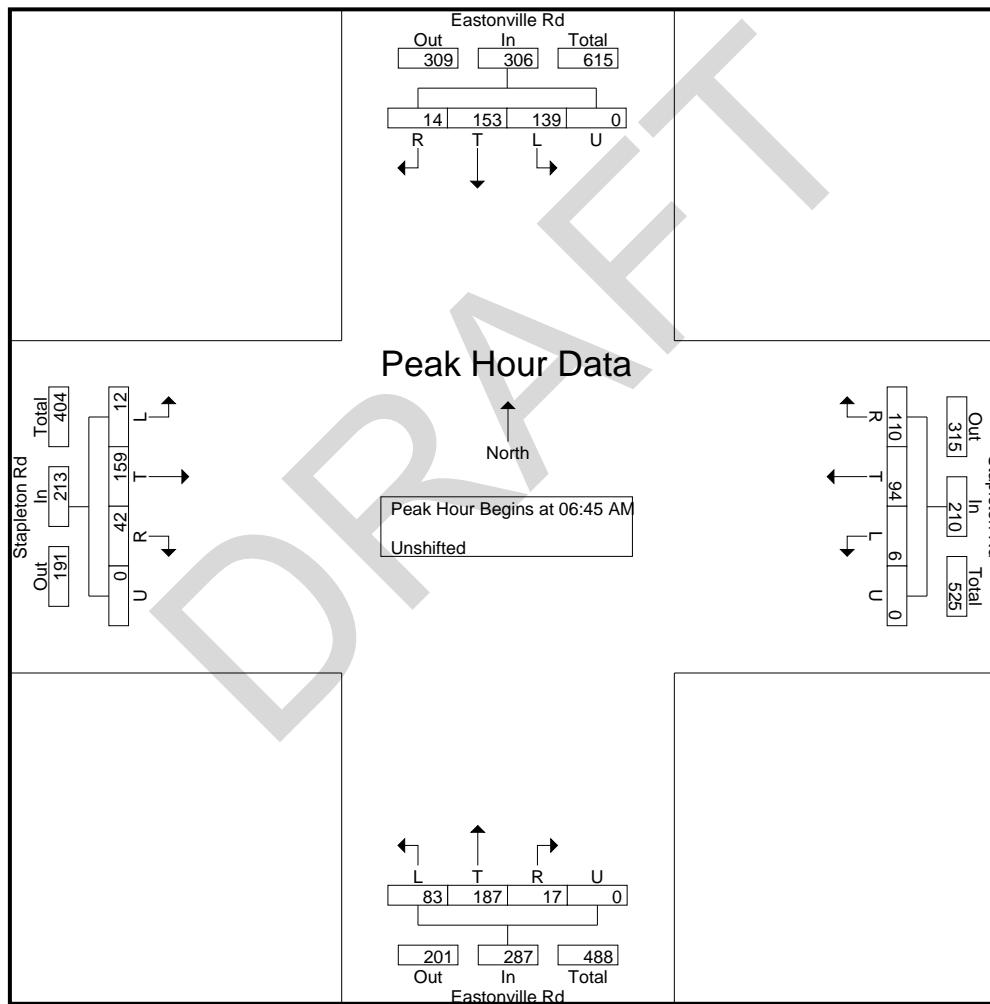

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304

Colorado Springs, CO 80909

719-633-2868

File Name : Eastonville Rd - Stapleton Rd PM

Site Code : S214870

Start Date : 10/7/2021

Page No : 1


## Groups Printed- Unshifted

Start Time	Eastonville Rd Southbound					Stapleton Rd Westbound					Eastonville Rd Northbound					Stapleton Rd Eastbound					Int. Total
	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	
04:00 PM	9	15	2	0	26	1	42	25	0	68	11	23	3	0	37	1	25	8	0	34	165
04:15 PM	9	20	0	2	31	6	38	27	0	71	6	25	5	0	36	3	23	9	0	35	173
04:30 PM	11	12	0	0	23	1	39	31	0	71	17	40	2	1	60	2	16	8	0	26	180
04:45 PM	21	16	2	0	39	1	34	22	0	57	13	27	2	0	42	5	14	6	0	25	163
Total	50	63	4	2	119	9	153	105	0	267	47	115	12	1	175	11	78	31	0	120	681
05:00 PM	13	27	2	0	42	3	40	18	0	61	5	24	4	0	33	4	18	3	0	25	161
05:15 PM	11	27	2	0	40	2	28	29	0	59	11	25	2	0	38	2	21	3	0	26	163
05:30 PM	14	19	2	0	35	4	30	15	0	49	11	30	2	0	43	0	26	8	0	34	161
05:45 PM	14	15	1	0	30	3	32	13	0	48	10	32	0	0	42	3	26	5	0	34	154
Total	52	88	7	0	147	12	130	75	0	217	37	111	8	0	156	9	91	19	0	119	639
06:00 PM	12	23	5	0	40	2	31	19	0	52	9	22	3	0	34	5	15	1	0	21	147
Grand Total	114	174	16	2	306	23	314	199	0	536	93	248	23	1	365	25	184	51	0	260	1467
Apprch %	37.3	56.9	5.2	0.7		4.3	58.6	37.1	0		25.5	67.9	6.3	0.3		9.6	70.8	19.6	0		
Total %	7.8	11.9	1.1	0.1	20.9	1.6	21.4	13.6	0	36.5	6.3	16.9	1.6	0.1	24.9	1.7	12.5	3.5	0	17.7	

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304  
Colorado Springs, CO 80909  
719-633-2868

File Name : Eastonville Rd - Stapleton Rd PM  
Site Code : S214870  
Start Date : 10/7/2021  
Page No : 3

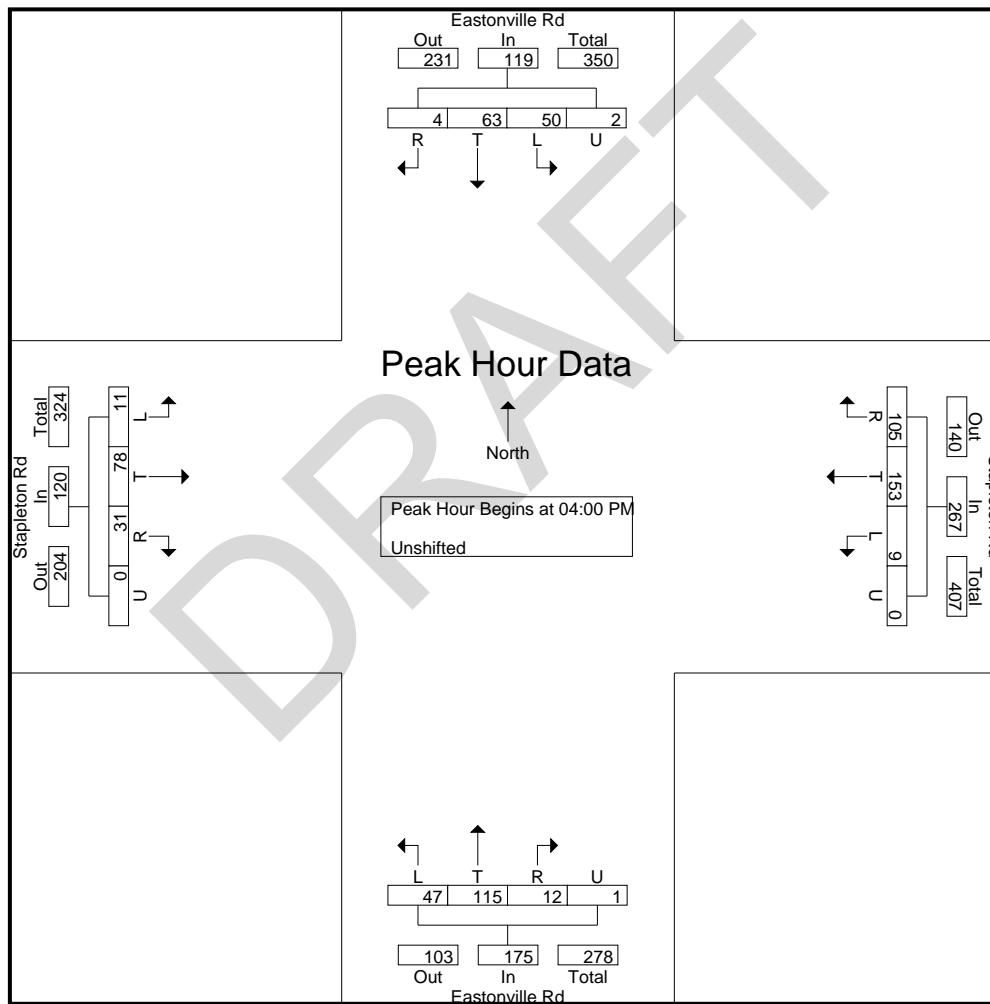

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304  
 Colorado Springs, CO 80909  
 719-633-2868

File Name : Hwy 24 - Stapleton Rd AM  
 Site Code : S214740  
 Start Date : 10/6/2021  
 Page No : 1


## Groups Printed- Unshifted

Start Time	Hwy 24 Southbound					Stapleton Rd Westbound					Hwy 24 Northbound					Stapleton Rd Eastbound					Int. Total
	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	
06:30 AM	6	101	2	0	109	0	7	3	0	10	11	79	0	0	90	6	44	20	0	70	279
06:45 AM	8	112	3	0	123	2	12	2	0	16	24	77	1	0	102	6	32	36	1	75	316
Total	14	213	5	0	232	2	19	5	0	26	35	156	1	0	192	12	76	56	1	145	595
07:00 AM	9	98	8	0	115	1	27	4	0	32	17	71	1	0	89	16	41	32	1	90	326
07:15 AM	16	105	19	0	140	1	29	6	0	36	22	64	3	0	89	7	46	46	0	99	364
07:30 AM	12	111	7	0	130	0	18	5	0	23	14	42	0	0	56	4	38	32	0	74	283
07:45 AM	6	71	7	0	84	1	11	3	0	15	12	62	1	0	75	8	23	19	0	50	224
Total	43	385	41	0	469	3	85	18	0	106	65	239	5	0	309	35	148	129	1	313	1197
08:00 AM	4	95	8	0	107	0	9	3	0	12	18	59	3	0	80	1	22	15	0	38	237
08:15 AM	3	105	4	0	112	0	8	3	0	11	13	48	1	0	62	1	15	20	0	36	221
08:30 AM	4	44	4	0	52	4	4	2	0	10	4	43	0	0	47	8	9	7	0	24	133
Grand Total	68	842	62	0	972	9	125	31	0	165	135	545	10	0	690	57	270	227	2	556	2383
Apprch %	7	86.6	6.4	0		5.5	75.8	18.8	0		19.6	79	1.4	0		10.3	48.6	40.8	0.4		
Total %	2.9	35.3	2.6	0	40.8	0.4	5.2	1.3	0	6.9	5.7	22.9	0.4	0	29	2.4	11.3	9.5	0.1	23.3	

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304  
Colorado Springs, CO 80909  
719-633-2868

File Name : Hwy 24 - Stapleton Rd AM  
Site Code : S214740  
Start Date : 10/6/2021  
Page No : 3

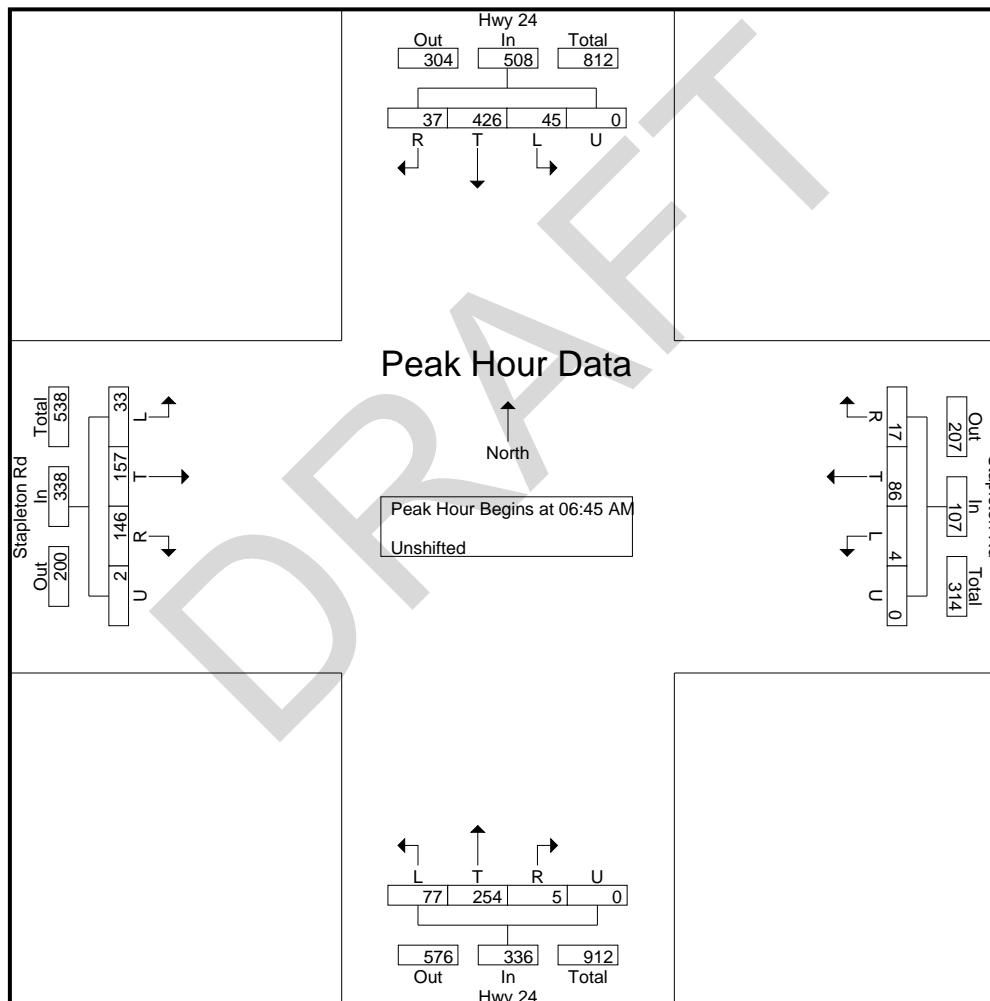

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304  
 Colorado Springs, CO 80909  
 719-633-2868

File Name : Hwy 24 - Stapleton Rd PM  
 Site Code : S214740  
 Start Date : 10/6/2021  
 Page No : 1


## Groups Printed- Unshifted

Start Time	Hwy 24 Southbound					Stapleton Rd Westbound					Hwy 24 Northbound					Stapleton Rd Eastbound					Int. Total
	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	L	T	R	U	App. Total	
04:00 PM	2	100	10	0	112	2	27	6	0	35	32	115	2	0	149	3	11	20	0	34	330
04:15 PM	4	98	11	0	113	1	35	12	0	48	26	109	4	0	139	3	15	15	0	33	333
04:30 PM	2	101	3	0	106	2	27	9	0	38	28	124	1	0	153	5	15	16	0	36	333
04:45 PM	2	71	5	0	78	0	35	7	0	42	34	120	1	0	155	7	8	16	0	31	306
Total	10	370	29	0	409	5	124	34	0	163	120	468	8	0	596	18	49	67	0	134	1302
05:00 PM	0	73	12	0	85	0	25	7	0	32	26	112	10	0	148	5	9	24	0	38	303
05:15 PM	1	80	9	0	90	2	18	6	0	26	37	122	3	0	162	4	14	20	0	38	316
05:30 PM	6	82	6	0	94	1	26	6	0	33	29	121	4	0	154	5	9	20	0	34	315
05:45 PM	1	73	3	1	78	3	22	7	1	33	25	107	3	0	135	10	19	4	1	34	280
Total	8	308	30	1	347	6	91	26	1	124	117	462	20	0	599	24	51	68	1	144	1214
06:00 PM	3	87	2	0	92	2	18	5	0	25	18	108	9	0	135	5	8	24	0	37	289
Grand Total	21	765	61	1	848	13	233	65	1	312	255	1038	37	0	1330	47	108	159	1	315	2805
Apprch %	2.5	90.2	7.2	0.1		4.2	74.7	20.8	0.3		19.2	78	2.8	0		14.9	34.3	50.5	0.3		
Total %	0.7	27.3	2.2	0	30.2	0.5	8.3	2.3	0	11.1	9.1	37	1.3	0	47.4	1.7	3.9	5.7	0	11.2	

# LSC Transportation Consultants, Inc.

2504 E Pikes Peak Ave, Suite 304  
Colorado Springs, CO 80909  
719-633-2868

File Name : Hwy 24 - Stapleton Rd PM  
Site Code : S214740  
Start Date : 10/6/2021  
Page No : 3

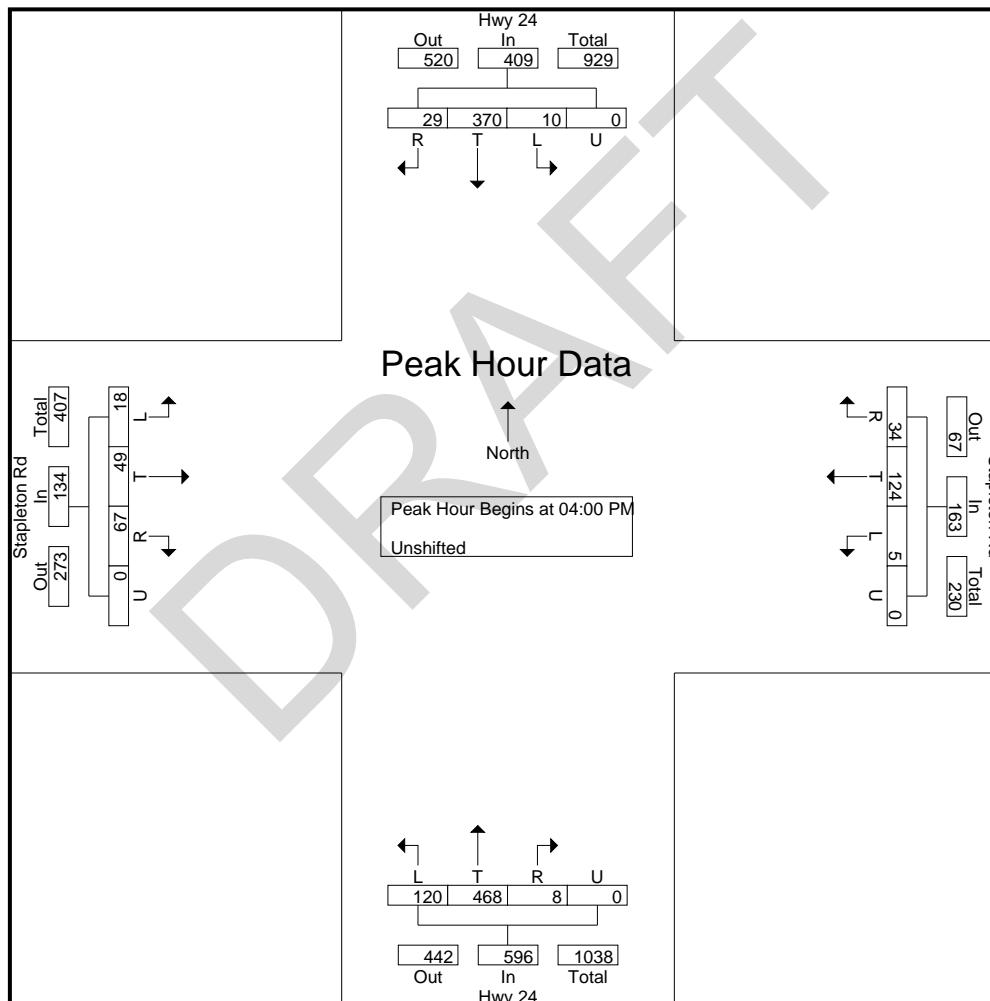


# LSC Transportation Consultants, Inc.



2504 E. Pikes Peak Ave, Suite 304  
 Colorado Springs, CO 80909  
 719-633-2868

File Name : Curtis Rd - Judge Orr Rd AM  
 Site Code : S214950  
 Start Date : 4/21/2022  
 Page No : 2

Start Time	Curtis Rd Southbound					Judge Orr Rd Westbound					Curtis Rd Northbound					Judge Orr Rd Eastbound					
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 06:30 to 08:25 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 06:45																					
06:45	0	12	1	0	13	2	12	1	0	15	0	5	3	0	8	5	1	0	0	6	42
06:50	0	14	0	0	14	4	6	0	0	10	0	5	1	0	6	4	5	0	0	9	39
06:55	0	14	2	0	16	0	9	4	0	13	0	2	2	0	4	4	3	0	0	7	40
07:00	0	13	0	0	13	1	9	2	0	12	0	11	2	0	13	4	4	0	0	8	46
07:05	0	13	0	0	13	5	16	2	0	23	0	6	3	0	9	6	3	0	0	9	54
07:10	0	18	0	0	18	2	9	1	0	12	0	9	4	0	13	9	3	0	0	12	55
07:15	0	16	0	0	16	6	11	4	0	21	0	9	2	0	11	7	3	0	0	10	58
07:20	0	15	0	0	15	1	9	1	0	11	0	9	4	0	13	7	3	0	0	10	49
07:25	0	9	1	0	10	5	11	1	0	17	0	7	4	0	11	8	2	0	0	10	48
07:30	0	20	0	0	20	1	8	1	0	10	0	4	2	0	6	7	4	1	0	12	48
07:35	0	9	1	0	10	3	7	2	0	12	0	5	3	0	8	9	1	0	0	10	40
07:40	0	13	3	0	16	3	9	0	0	12	0	5	5	0	10	9	2	0	0	11	49
Total Volume	0	166	8	0	174	33	116	19	0	168	0	77	35	0	112	79	34	1	0	114	568
% App. Total	0	95.4	4.6	0		19.6	69	11.3	0		0	68.8	31.2	0		69.3	29.8	0.9	0		
PHF	.000	.692	.222	.000	.725	.458	.604	.396	.000	.609	.000	.583	.583	.000	.718	.731	.567	.083	.000	.792	.816

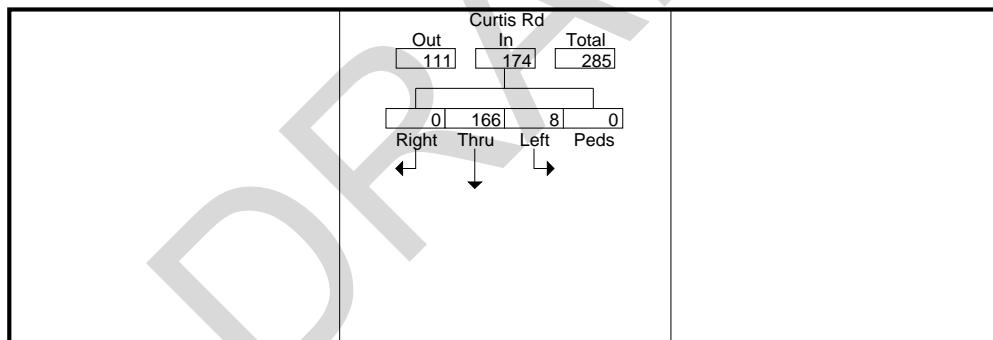

Peak Hour Data

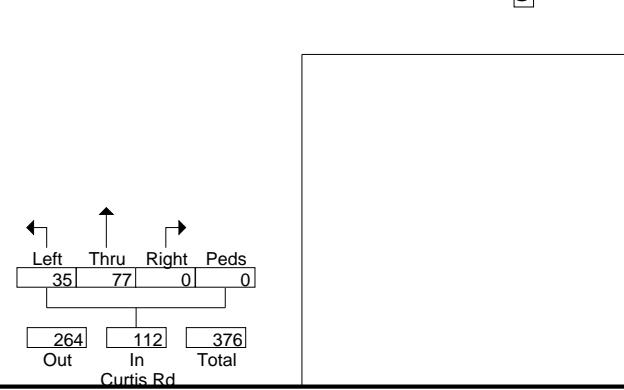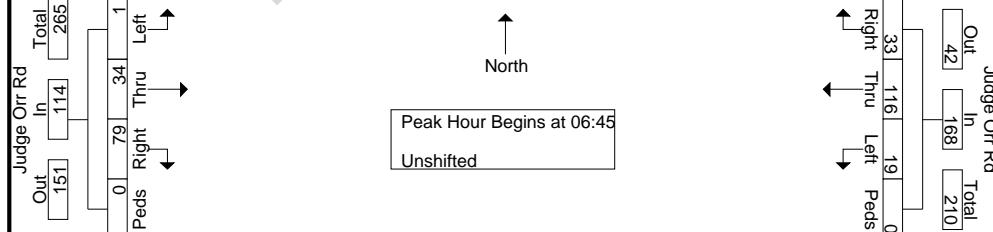

# LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304

Colorado Springs, CO 80909

719-633-2868

File Name : Curtis Rd - Judge Orr Rd AM

Site Code : S214950

Start Date : 4/21/2022

Page No : 1

## Groups Printed- Unshifted


	Curtis Rd Southbound					Judge Orr Rd Westbound					Curtis Rd Northbound					Judge Orr Rd Eastbound						
	Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
06:30	0	42	1	0	43	43	2	29	2	0	33	0	9	4	0	13	14	5	0	0	19	108
06:45	0	40	3	0	43	43	6	27	5	0	38	0	12	6	0	18	13	9	0	0	22	121
Total		0	82	4	0	86	8	56	7	0	71	0	21	10	0	31	27	14	0	0	41	229
07:00	0	44	0	0	44	44	8	34	5	0	47	0	26	9	0	35	19	10	0	0	29	155
07:15	0	40	1	0	41	41	12	31	6	0	49	0	25	10	0	35	22	8	0	0	30	155
07:30	0	42	4	0	46	46	7	24	3	0	34	0	14	10	0	24	25	7	1	0	33	137
07:45	1	42	2	0	45	45	3	32	2	0	37	1	11	8	0	20	12	5	1	0	18	120
Total		1	168	7	0	176	30	121	16	0	167	1	76	37	0	114	78	30	2	0	110	567
08:00	1	17	7	0	25	25	4	18	2	0	24	0	8	3	0	11	5	7	1	0	13	73
08:15	1	17	3	0	21	21	3	21	1	0	25	2	14	2	0	18	7	13	0	0	20	84
Grand Total		3	284	21	0	308	45	216	26	0	287	3	119	52	0	174	117	64	3	0	184	953
Apprch %		1	92.2	6.8	0		15.7	75.3	9.1	0		1.7	68.4	29.9	0		63.6	34.8	1.6	0		
Total %		0.3	29.8	2.2	0	32.3	4.7	22.7	2.7	0	30.1	0.3	12.5	5.5	0	18.3	12.3	6.7	0.3	0	19.3	

# LSC Transportation Consultants, Inc.



2504 E. Pikes Peak Ave, Suite 304  
 Colorado Springs, CO 80909  
 719-633-2868

File Name : Curtis Rd - Judge Orr Rd PM  
 Site Code : S214950  
 Start Date : 4/21/2022  
 Page No : 2

Start Time	Curtis Rd Southbound					Judge Orr Rd Westbound					Curtis Rd Northbound					Judge Orr Rd Eastbound					
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 16:00 to 17:55 - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 16:00																					
16:00	1	4	1	0	6	0	7	0	0	7	0	11	4	0	15	3	10	0	0	13	41
16:05	1	5	2	1	9	1	8	0	0	9	0	12	8	0	20	2	9	0	0	11	49
16:10	0	3	1	0	4	0	10	1	0	11	2	10	3	0	15	4	12	0	0	16	46
16:15	0	4	1	0	5	1	3	1	0	5	1	11	3	0	15	3	8	0	0	11	36
16:20	1	5	0	0	6	1	5	0	0	6	3	11	9	0	23	3	10	0	0	13	48
16:25	0	1	1	0	2	2	5	0	0	7	0	16	6	0	22	3	3	0	0	6	37
16:30	0	4	2	0	6	2	6	0	0	8	1	9	5	0	15	1	16	1	0	18	47
16:35	0	1	1	0	2	1	3	0	0	4	1	13	3	0	17	4	9	1	0	14	37
16:40	0	6	2	0	8	2	2	0	0	4	3	8	5	0	16	2	5	0	0	7	35
16:45	0	7	1	0	8	1	3	0	0	4	3	9	5	0	17	1	7	0	0	8	37
16:50	1	4	3	0	8	2	7	0	0	9	1	15	10	0	26	2	14	1	0	17	60
16:55	1	3	1	0	5	0	5	0	0	5	3	12	5	0	20	1	7	0	0	8	38
Total Volume	5	47	16	1	69	13	64	2	0	79	18	137	66	0	221	29	110	3	0	142	511
% App. Total	7.2	68.1	23.2	1.4		16.5	81	2.5	0		8.1	62	29.9	0		20.4	77.5	2.1	0		
PHF	.417	.560	.444	.083	.639	.542	.533	.167	.000	.598	.500	.714	.550	.000	.708	.604	.573	.250	.000	.657	.710

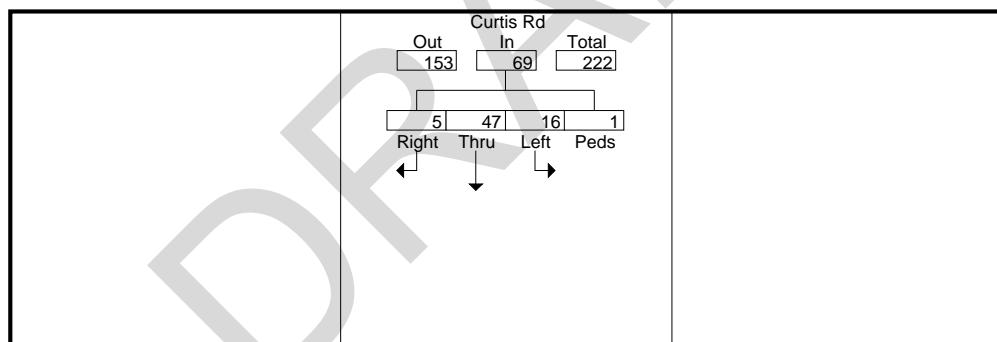

Peak Hour Data

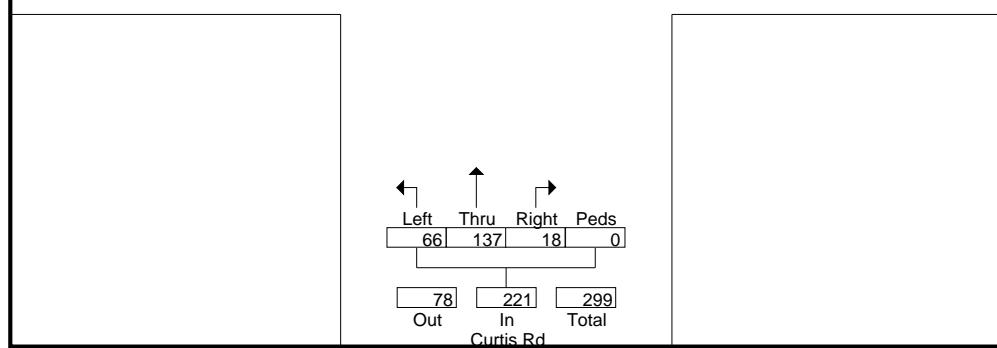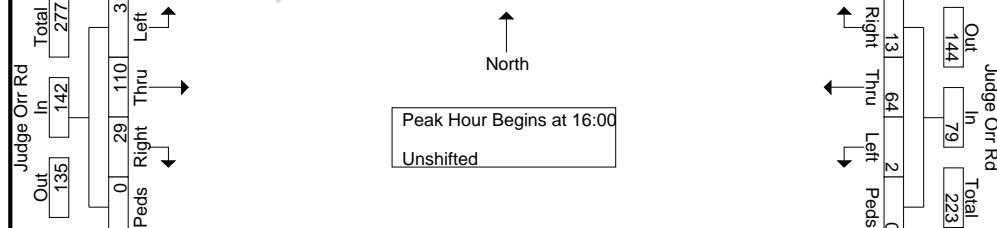

# LSC Transportation Consultants, Inc.

2504 E. Pikes Peak Ave, Suite 304

Colorado Springs, CO 80909

719-633-2868

File Name : Curtis Rd - Judge Orr Rd PM

Site Code : S214950

Start Date : 4/21/2022

Page No : 1

## Groups Printed- Unshifted

	Curtis Rd Southbound					Judge Orr Rd Westbound					Curtis Rd Northbound					Judge Orr Rd Eastbound						
	Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
16:00	2	12	4	1	19	19	1	25	1	0	27	2	33	15	0	50	9	31	0	0	40	136
16:15	1	10	2	0	13	13	4	13	1	0	18	4	38	18	0	60	9	21	0	0	30	121
16:30	0	11	5	0	16	16	5	11	0	0	16	5	30	13	0	48	7	30	2	0	39	119
16:45	2	14	5	0	21	21	3	15	0	0	18	7	36	20	0	63	4	28	1	0	33	135
Total		5	47	16	1	69	13	64	2	0	79	18	137	66	0	221	29	110	3	0	142	511
17:00	0	9	4	0	13	13	4	10	0	0	14	6	41	11	0	58	5	32	1	0	38	123
17:15	1	15	2	0	18	18	3	15	0	0	18	2	23	11	0	36	8	22	1	0	31	103
17:30	1	10	9	0	20	20	5	11	0	0	16	2	17	6	0	25	6	36	0	0	42	103
17:45	1	13	9	0	23	23	0	19	1	0	20	1	18	4	0	23	3	23	1	0	27	93
Total		3	47	24	0	74	12	55	1	0	68	11	99	32	0	142	22	113	3	0	138	422
Grand Total		8	94	40	1	143	25	119	3	0	147	29	236	98	0	363	51	223	6	0	280	933
Apprch %		5.6	65.7	28	0.7		17	81	2	0		8	65	27	0		18.2	79.6	2.1	0		
Total %		0.9	10.1	4.3	0.1	15.3	2.7	12.8	0.3	0	15.8	3.1	25.3	10.5	0	38.9	5.5	23.9	0.6	0	30	

# Levels of Service

---

DRAFT



HCM 6th TWSC  
13: Eastonville Rd & Stapleton Dr

Existing Traffic  
AM Peak Hour

Intersection

Int Delay, s/veh 108.7

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	12	159	42	6	94	110	83	187	17	139	153	14
Future Vol, veh/h	12	159	42	6	94	110	83	187	17	139	153	14
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None									
Storage Length	-	-	-	-	-	250	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	87	87	87	85	85	85	68	68	68	64	64	64
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	14	183	48	7	111	129	122	275	25	217	239	22

Major/Minor	Minor2	Minor1			Major1			Major2				
Conflicting Flow All	1336	1228	250	1332	1227	288	261	0	0	300	0	0
Stage 1	684	684	-	532	532	-	-	-	-	-	-	-
Stage 2	652	544	-	800	695	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	130	~ 178	789	131	178	751	1303	-	-	1261	-	-
Stage 1	439	449	-	531	526	-	-	-	-	-	-	-
Stage 2	457	519	-	379	444	-	-	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	22	~ 126	789	-	126	751	1303	-	-	1261	-	-
Mov Cap-2 Maneuver	22	~ 126	-	-	126	-	-	-	-	-	-	-
Stage 1	389	358	-	471	467	-	-	-	-	-	-	-
Stage 2	256	460	-	139	354	-	-	-	-	-	-	-

Approach	EB	WB			NB			SB					
HCM Control Delay, \$s	606.5					2.3				3.8			
HCM LOS	F												
<hr/>													
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	WBLn2	SBL	SBT	SBR				
Capacity (veh/h)	1303	-	-	114	-	751	1261	-	-				
HCM Lane V/C Ratio	0.094	-	-	2.148	-	0.172	0.172	-	-				
HCM Control Delay (s)	8	0	\$ 606.5	-	10.8	8.4	0	-	-				
HCM Lane LOS	A	A	-	F	-	B	A	A	-				
HCM 95th %tile Q(veh)	0.3	-	-	20.8	-	0.6	0.6	-	-				

Notes

~: Volume exceeds capacity    \$: Delay exceeds 300s    +: Computation Not Defined    \*: All major volume in platoon

Intersection														
Int Delay, s/veh	18.2													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR		
Lane Configurations	↖	↑	↖	↖	↑	↖	↖	↑	↖	↖	↑	↖		
Traffic Vol, veh/h	33	157	146	4	86	17	77	254	5	45	426	37		
Future Vol, veh/h	33	157	146	4	86	17	77	254	5	45	426	37		
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0		
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free		
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None		
Storage Length	185	-	325	225	-	225	1000	-	0	785	-	785		
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-		
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-		
Peak Hour Factor	85	85	85	74	74	74	94	94	94	91	91	91		
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2		
Mvmt Flow	39	185	172	5	116	23	82	270	5	49	468	41		
Major/Minor														
Minor2		Minor1			Major1			Major2						
Conflicting Flow All	1072	1005	468	1199	1041	270	509	0	0	275	0	0		
Stage 1	566	566	-	434	434	-	-	-	-	-	-	-		
Stage 2	506	439	-	765	607	-	-	-	-	-	-	-		
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-		
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-		
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-		
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-		
Pot Cap-1 Maneuver	198	241	595	162	230	769	1056	-	-	1288	-	-		
Stage 1	509	507	-	600	581	-	-	-	-	-	-	-		
Stage 2	549	578	-	396	486	-	-	-	-	-	-	-		
Platoon blocked, %								-	-	-	-	-		
Mov Cap-1 Maneuver	97	214	595	29	204	769	1056	-	-	1288	-	-		
Mov Cap-2 Maneuver	97	214	-	29	204	-	-	-	-	-	-	-		
Stage 1	469	488	-	553	536	-	-	-	-	-	-	-		
Stage 2	385	533	-	168	468	-	-	-	-	-	-	-		
Approach														
EB			WB			NB			SB					
HCM Control Delay, s	48.5		42.5			2			0.7					
HCM LOS	E		E											
Minor Lane/Major Mvmt			NBL	NBT	NBR	EBLn1	EBLn2	EBLn3	WBLn1	WBLn2	WBLn3	SBL	SBT	SBR
Capacity (veh/h)	1056		-	-	97	214	595	29	204	769	1288	-	-	-
HCM Lane V/C Ratio	0.078		-	-	0.4	0.863	0.289	0.186	0.57	0.03	0.038	-	-	-
HCM Control Delay (s)	8.7		-	-	64.9	77.5	13.5	155.7	43.7	9.8	7.9	-	-	-
HCM Lane LOS	A		-	-	F	F	B	F	E	A	A	-	-	-
HCM 95th %tile Q(veh)	0.3		-	-	1.6	6.7	1.2	0.6	3.1	0.1	0.1	-	-	-

Intersection

Int Delay, s/veh 7.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↓		↑	↓		↑	↓		↑	↓	
Traffic Vol, veh/h	1	34	79	19	116	33	35	77	0	8	166	0
Future Vol, veh/h	1	34	79	19	116	33	35	77	0	8	166	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	87	87	87	83	83	83	87	87	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	1	41	95	22	133	38	42	93	0	9	191	0

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	171	0	0	136	0	0	383	306	89	333	334	152
Stage 1	-	-	-	-	-	-	91	91	-	196	196	-
Stage 2	-	-	-	-	-	-	292	215	-	137	138	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1406	-	-	1448	-	-	575	608	969	620	586	894
Stage 1	-	-	-	-	-	-	916	820	-	806	739	-
Stage 2	-	-	-	-	-	-	716	725	-	866	782	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1406	-	-	1448	-	-	423	598	969	540	577	894
Mov Cap-2 Maneuver	-	-	-	-	-	-	423	598	-	540	577	-
Stage 1	-	-	-	-	-	-	915	819	-	805	728	-
Stage 2	-	-	-	-	-	-	520	714	-	767	781	-

Approach	EB	WB			NB			SB					
HCM Control Delay, s	0.1	0.9			12.9			14.2					
HCM LOS					B			B					
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2		
Capacity (veh/h)		423	598	1406	-	-	1448	-	-	540	577		
HCM Lane V/C Ratio		0.1	0.155	0.001	-	-	0.015	-	-	0.017	0.331		
HCM Control Delay (s)		14.5	12.1	7.6	-	-	7.5	-	-	11.8	14.3		
HCM Lane LOS		B	B	A	-	-	A	-	-	B	B		
HCM 95th %tile Q(veh)		0.3	0.5	0	-	-	0	-	-	0.1	1.4		

HCM 6th TWSC  
13: Eastonville Rd & Stapleton Dr

Existing Traffic  
PM Peak Hour

Intersection												
Int Delay, s/veh	9.5											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↑	↑	↑	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	11	78	31	9	153	105	47	115	12	50	63	4
Future Vol, veh/h	11	78	31	9	153	105	47	115	12	50	63	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	250	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	94	94	94	74	74	74	83	83	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	13	94	37	10	163	112	64	155	16	60	76	5
Major/Minor	Minor2		Minor1		Major1		Major2					
Conflicting Flow All	628	498	79	555	492	163	81	0	0	171	0	0
Stage 1	199	199	-	291	291	-	-	-	-	-	-	-
Stage 2	429	299	-	264	201	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	395	474	981	442	478	882	1517	-	-	1406	-	-
Stage 1	803	736	-	717	672	-	-	-	-	-	-	-
Stage 2	604	666	-	741	735	-	-	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	229	431	981	330	435	882	1517	-	-	1406	-	-
Mov Cap-2 Maneuver	229	431	-	330	435	-	-	-	-	-	-	-
Stage 1	765	703	-	683	640	-	-	-	-	-	-	-
Stage 2	375	635	-	590	702	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB					
HCM Control Delay, s	16.4		15.3		2		3.3					
HCM LOS	C		C		A		A					
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	WBLn2	SBL	SBT	SBR			
Capacity (veh/h)	1517	-	-	460	427	882	1406	-	-			
HCM Lane V/C Ratio	0.042	-	-	0.314	0.404	0.127	0.043	-	-			
HCM Control Delay (s)	7.5	0	-	16.4	19	9.7	7.7	0	-			
HCM Lane LOS	A	A	-	C	C	A	A	A	-			
HCM 95th %tile Q(veh)	0.1	-	-	1.3	1.9	0.4	0.1	-	-			

Intersection														
Int Delay, s/veh	21.2													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR		
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑		
Traffic Vol, veh/h	18	49	67	5	124	34	120	468	8	10	370	29		
Future Vol, veh/h	18	49	67	5	124	34	120	468	8	10	370	29		
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0		
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free		
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None		
Storage Length	185	-	325	225	-	225	1000	-	0	785	-	785		
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-		
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-		
Peak Hour Factor	93	93	93	85	85	85	92	92	92	90	90	90		
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2		
Mvmt Flow	19	53	72	6	146	40	130	509	9	11	411	32		
Major/Minor														
Minor2		Minor1			Major1			Major2						
Conflicting Flow All	1300	1211	411	1281	1234	509	443	0	0	518	0	0		
Stage 1	433	433	-	769	769	-	-	-	-	-	-	-		
Stage 2	867	778	-	512	465	-	-	-	-	-	-	-		
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-		
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-		
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-		
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-		
Pot Cap-1 Maneuver	138	182	641	142	177	564	1117	-	-	1048	-	-		
Stage 1	601	582	-	394	411	-	-	-	-	-	-	-		
Stage 2	348	407	-	545	563	-	-	-	-	-	-	-		
Platoon blocked, %								-	-	-	-	-		
Mov Cap-1 Maneuver	20	159	641	85	155	564	1117	-	-	1048	-	-		
Mov Cap-2 Maneuver	20	159	-	85	155	-	-	-	-	-	-	-		
Stage 1	531	576	-	348	363	-	-	-	-	-	-	-		
Stage 2	171	360	-	435	557	-	-	-	-	-	-	-		
Approach														
EB			WB			NB			SB					
HCM Control Delay, s	81.2		91.6			1.7			0.2					
HCM LOS	F		F											
Minor Lane/Major Mvmt			NBL	NBT	NBR	EBLn1	EBLn2	EBLn3	WBLn1	WBLn2	WBLn3	SBL	SBT	SBR
Capacity (veh/h)	1117		-	-	20	159	641	85	155	564	1048	-	-	-
HCM Lane V/C Ratio	0.117		-	-	0.968	0.331	0.112	0.069	0.941	0.071	0.011	-	-	-
HCM Control Delay (s)	8.6		-	\$ 457.8	38.5	11.3	50.5	115.1	11.9	8.5	-	-	-	-
HCM Lane LOS	A		-	-	F	E	B	F	F	B	A	-	-	-
HCM 95th %tile Q(veh)	0.4		-	-	2.7	1.4	0.4	0.2	6.8	0.2	0	-	-	-

Intersection

Int Delay, s/veh 6.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	3	110	29	2	64	13	78	137	18	16	47	5
Future Vol, veh/h	3	110	29	2	64	13	78	137	18	16	47	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	83	83	83	87	87	87	83	83	83
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	133	35	2	77	16	90	157	21	19	57	6

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	93	0	0	168	0	0	280	256	151	337	265	85
Stage 1	-	-	-	-	-	-	159	159	-	89	89	-
Stage 2	-	-	-	-	-	-	121	97	-	248	176	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1501	-	-	1410	-	-	672	648	895	617	640	974
Stage 1	-	-	-	-	-	-	843	766	-	918	821	-
Stage 2	-	-	-	-	-	-	883	815	-	756	753	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1501	-	-	1410	-	-	620	645	895	488	637	974
Mov Cap-2 Maneuver	-	-	-	-	-	-	620	645	-	488	637	-
Stage 1	-	-	-	-	-	-	840	764	-	915	820	-
Stage 2	-	-	-	-	-	-	816	814	-	585	751	-

Approach	EB	WB			NB			SB			
HCM Control Delay, s	0.2	0.2			12.2			11.4			
HCM LOS					B			B			
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)		620	667	1501	-	-	1410	-	-	488	659
HCM Lane V/C Ratio	0.145	0.267	0.002	-	-	0.002	-	-	0.04	0.095	
HCM Control Delay (s)	11.8	12.4	7.4	-	-	7.6	-	-	12.7	11	
HCM Lane LOS	B	B	A	-	-	A	-	-	B	B	
HCM 95th %tile Q(veh)	0.5	1.1	0	-	-	0	-	-	0.1	0.3	

Intersection						
Approach	EB	WB	NB	SB		
Entry Lanes	1	1	1	1		
Conflicting Circle Lanes	1	1	1	1		
Adj Approach Flow, veh/h	374	407	440	978		
Demand Flow Rate, veh/h	381	416	449	997		
Vehicles Circulating, veh/h	951	458	779	298		
Vehicles Exiting, veh/h	268	770	553	346		
Ped Vol Crossing Leg, #/h	0	0	0	0		
Ped Cap Adj	1.000	1.000	1.000	1.000		
Approach Delay, s/veh	27.2	2.9	23.2	28.2		
Approach LOS	D	A	C	D		
Lane	Left	Left	Bypass	Left	Left	Bypass
Designated Moves	LTR	LT	R	LTR	LT	R
Assumed Moves	LTR	LT	R	LTR	LT	R
RT Channelized			Free			Free
Lane Util	1.000	1.000	1.000	1.000		
Follow-Up Headway, s	2.609	2.609	2.609	2.609		
Critical Headway, s	4.976	4.976	229	4.976	4.976	76
Entry Flow, veh/h	381	186	1938	449	921	1938
Cap Entry Lane, veh/h	523	865	0.980	623	1018	0.980
Entry HV Adj Factor	0.981	0.978	225	0.980	0.981	75
Flow Entry, veh/h	374	182	1900	440	903	1900
Cap Entry, veh/h	513	846	0.118	611	999	0.039
V/C Ratio	0.728	0.215	0.0	0.720	0.905	0.0
Control Delay, s/veh	27.2	6.5	A	23.2	30.6	A
LOS	D	A	0	C	D	0
95th %tile Queue, veh	6	1		6		13

Intersection

Int Delay, s/veh 1.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗
Traffic Vol, veh/h	61	272	384	4	130	24	156	314	5	57	547	46
Future Vol, veh/h	61	272	384	4	130	24	156	314	5	57	547	46
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	Free	-	-	Free	-	-	None	-	-	None
Storage Length	185	-	325	225	-	225	1000	-	0	785	-	785
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	85	85	85	74	74	74	94	94	94	91	91	91
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	72	320	452	5	176	32	166	334	5	63	601	51

Major/Minor	Minor2	Minor1		Major1		Major2			
Conflicting Flow All	1484	1398	-	1579	1444	-	652	0	0
Stage 1	727	727	-	666	666	-	-	-	-
Stage 2	757	671	-	913	778	-	-	-	-
Critical Hdwy	7.12	6.52	-	7.12	6.52	-	4.12	-	4.12
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-
Follow-up Hdwy	3.518	4.018	-	3.518	4.018	-	2.218	-	2.218
Pot Cap-1 Maneuver	103	~ 141	0	88	~ 132	0	935	-	1220
Stage 1	415	429	0	449	457	0	-	-	-
Stage 2	400	455	0	328	407	0	-	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	~ 110	-	-	~ 103	-	935	-	1220
Mov Cap-2 Maneuver	-	~ 110	-	-	~ 103	-	-	-	-
Stage 1	341	407	-	369	376	-	-	-	-
Stage 2	175	374	-	66	386	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s			3.2	0.7
HCM LOS	-	-		
Minor Lane/Major Mvmt	NBL	NBT	NBR	SBL
Capacity (veh/h)	935	-	-	-
HCM Lane V/C Ratio	0.177	-	-	-
HCM Control Delay (s)	9.7	-	-	-
HCM Lane LOS	A	-	-	-
HCM 95th %tile Q(veh)	0.6	-	-	-

Notes

~: Volume exceeds capacity    \$: Delay exceeds 300s    +: Computation Not Defined    \*: All major volume in platoon

Timings  
106: US 24 & Stapleton Dr

2026 Background Traffic  
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	61	272	384	4	130	24	156	314	5	57	547	46
Future Volume (vph)	61	272	384	4	130	24	156	314	5	57	547	46
Turn Type	pm+pt	NA	Free	pm+pt	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		8			2	6		6
Detector Phase	7	4		3	8	8	5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	1.0		5.0	1.0	1.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.0	6.0		10.0	6.0	6.0	10.0	20.0	20.0	10.0	20.0	20.0
Total Split (s)	12.0	35.0		12.0	35.0	35.0	20.0	63.0	63.0	10.0	53.0	53.0
Total Split (%)	10.0%	29.2%		10.0%	29.2%	29.2%	16.7%	52.5%	52.5%	8.3%	44.2%	44.2%
Yellow Time (s)	3.0	3.0		3.0	3.0	3.0	3.0	4.0	4.0	3.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0	5.0	5.0	6.0	6.0	5.0	6.0	6.0
Lead/Lag	Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes								
Recall Mode	None	None		None	None	None	None	Max	Max	None	Max	Max
Act Effect Green (s)	26.0	24.7	103.8	22.0	17.5	17.5	10.4	58.3	58.3	56.6	50.5	50.5
Actuated g/C Ratio	0.25	0.24	1.00	0.21	0.17	0.17	0.10	0.56	0.56	0.55	0.49	0.49
v/c Ratio	0.28	0.72	0.29	0.03	0.56	0.08	0.48	0.32	0.01	0.10	0.66	0.06
Control Delay	31.8	47.0	0.5	27.5	47.8	0.4	50.8	15.7	0.0	10.0	27.2	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	31.8	47.0	0.5	27.5	47.8	0.4	50.8	15.7	0.0	10.0	27.2	0.1
LOS	C	D	A	C	D	A	D	B	A	A	C	A
Approach Delay		20.8			40.2			27.0			23.8	
Approach LOS		C			D			C			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 103.8

Natural Cycle: 75

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 24.9


Intersection LOS: C

Intersection Capacity Utilization 69.2%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr

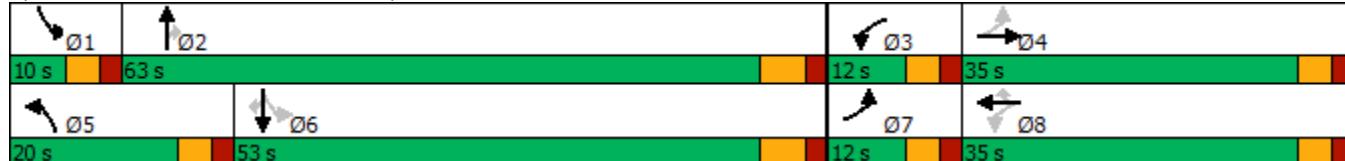

Intersection

Int Delay, s/veh 11.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	2	38	87	21	128	43	39	117	1	56	279	1
Future Vol, veh/h	2	38	87	21	128	43	39	117	1	56	279	1
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	87	87	87	83	83	83	87	87	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	46	105	24	147	49	47	141	1	64	321	1

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	196	0	0	151	0	0	484	347	99	394	375	172
Stage 1	-	-	-	-	-	-	103	103	-	220	220	-
Stage 2	-	-	-	-	-	-	381	244	-	174	155	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1377	-	-	1430	-	-	493	576	957	566	556	872
Stage 1	-	-	-	-	-	-	903	810	-	782	721	-
Stage 2	-	-	-	-	-	-	641	704	-	828	769	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1377	-	-	1430	-	-	259	566	957	451	546	872
Mov Cap-2 Maneuver	-	-	-	-	-	-	259	566	-	451	546	-
Stage 1	-	-	-	-	-	-	902	809	-	781	709	-
Stage 2	-	-	-	-	-	-	345	692	-	682	768	-

Approach	EB	WB			NB			SB				
HCM Control Delay, s	0.1	0.8			15.5			19.6				
HCM LOS					C			C				
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	
Capacity (veh/h)		259	568	1377	-	-	1430	-	-	451	547	
HCM Lane V/C Ratio		0.181	0.25	0.002	-	-	0.017	-	-	0.143	0.588	
HCM Control Delay (s)		22	13.4	7.6	-	-	7.6	-	-	14.3	20.6	
HCM Lane LOS		C	B	A	-	-	A	-	-	B	C	
HCM 95th %tile Q(veh)		0.6	1	0	-	-	0.1	-	-	0.5	3.8	

Intersection						
Approach	EB	WB	NB	SB		
Entry Lanes	1	1	1	1		
Conflicting Circle Lanes	1	1	1	1		
Adj Approach Flow, veh/h	292	694	575	578		
Demand Flow Rate, veh/h	298	708	587	589		
Vehicles Circulating, veh/h	562	630	519	349		
Vehicles Exiting, veh/h	326	476	341	543		
Ped Vol Crossing Leg, #/h	0	0	0	0		
Ped Cap Adj	1.000	1.000	1.000	1.000		
Approach Delay, s/veh	9.5	3.6	19.0	10.3		
Approach LOS	A	A	C	B		
Lane	Left	Left	Bypass	Left	Left	Bypass
Designated Moves	LTR	LT	R	LTR	LT	R
Assumed Moves	LTR	LT	R	LTR	LT	R
RT Channelized			Free			Free
Lane Util	1.000	1.000	1.000	1.000		
Follow-Up Headway, s	2.609	2.609	2.609	2.609		
Critical Headway, s	4.976	4.976	446	4.976	4.976	50
Entry Flow, veh/h	298	262	1938	587	539	1938
Cap Entry Lane, veh/h	778	726	0.980	813	967	0.980
Entry HV Adj Factor	0.979	0.982	437	0.980	0.981	49
Flow Entry, veh/h	292	257	1900	575	529	1900
Cap Entry, veh/h	762	713	0.230	796	948	0.026
V/C Ratio	0.383	0.361	0.0	0.722	0.558	0.0
Control Delay, s/veh	9.5	9.7	A	19.0	11.3	A
LOS	A	A	1	C	B	0
95th %tile Queue, veh	2	2	6		4	

Intersection

Int Delay, s/veh 2.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗
Traffic Vol, veh/h	36	129	219	5	259	48	389	604	8	20	467	62
Future Vol, veh/h	36	129	219	5	259	48	389	604	8	20	467	62
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	Free	-	-	Free	-	-	None	-	-	None
Storage Length	185	-	325	225	-	225	1000	-	0	785	-	785
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	93	93	93	85	85	85	92	92	92	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	39	139	235	6	305	56	423	657	9	22	519	69

Major/Minor	Minor2	Minor1		Major1		Major2			
Conflicting Flow All	2223	2075	-	2170	2135	-	588	0	0
Stage 1	563	563	-	1503	1503	-	-	-	-
Stage 2	1660	1512	-	667	632	-	-	-	-
Critical Hdwy	7.12	6.52	-	7.12	6.52	-	4.12	-	4.12
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-
Follow-up Hdwy	3.518	4.018	-	3.518	4.018	-	2.218	-	2.218
Pot Cap-1 Maneuver	~ 31	~ 54	0	34	~ 49	0	987	-	923
Stage 1	511	509	0	152	~ 184	0	-	-	-
Stage 2	123	183	0	448	474	0	-	-	-
Platoon blocked, %						-	-	-	-
Mov Cap-1 Maneuver	-	~ 30	-	-	~ 27	-	987	-	923
Mov Cap-2 Maneuver	-	~ 30	-	-	~ 27	-	-	-	-
Stage 1	292	497	-	87	~ 105	-	-	-	-
Stage 2	-	~ 104	-	315	463	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s			4.4	0.3
HCM LOS	-	-		
Minor Lane/Major Mvmt	NBL	NBT	NBR	SBL
Capacity (veh/h)	987	-	-	-
HCM Lane V/C Ratio	0.428	-	-	-
HCM Control Delay (s)	11.4	-	-	-
HCM Lane LOS	B	-	-	-
HCM 95th %tile Q(veh)	2.2	-	-	-

Notes

~: Volume exceeds capacity    \$: Delay exceeds 300s    +: Computation Not Defined    \*: All major volume in platoon

Timings  
106: US 24 & Stapleton Dr

2026 Background Traffic  
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	36	129	219	5	259	48	389	604	8	20	467	62
Future Volume (vph)	36	129	219	5	259	48	389	604	8	20	467	62
Turn Type	pm+pt	NA	Free	pm+pt	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		8			2	6		6
Detector Phase	7	4		3	8	8	5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	1.0		5.0	1.0	1.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.0	6.0		10.0	6.0	6.0	10.0	20.0	20.0	10.0	20.0	20.0
Total Split (s)	12.0	38.0		12.0	38.0	38.0	25.0	60.0	60.0	10.0	45.0	45.0
Total Split (%)	10.0%	31.7%		10.0%	31.7%	31.7%	20.8%	50.0%	50.0%	8.3%	37.5%	37.5%
Yellow Time (s)	3.0	3.0		3.0	3.0	3.0	3.0	4.0	4.0	3.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0	5.0	5.0	6.0	6.0	5.0	6.0	6.0
Lead/Lag	Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes								
Recall Mode	None	None		None	None	None	None	Max	Max	None	Max	Max
Act Effect Green (s)	27.8	26.6	101.8	25.3	22.1	22.1	16.9	58.5	58.5	46.1	40.0	40.0
Actuated g/C Ratio	0.27	0.26	1.00	0.25	0.22	0.22	0.17	0.57	0.57	0.45	0.39	0.39
v/c Ratio	0.18	0.29	0.15	0.02	0.75	0.12	0.74	0.61	0.01	0.06	0.71	0.10
Control Delay	27.3	31.7	0.2	24.6	50.7	0.5	50.7	21.9	0.0	13.3	36.2	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	27.3	31.7	0.2	24.6	50.7	0.5	50.7	21.9	0.0	13.3	36.2	0.3
LOS	C	C	A	C	D	A	D	C	A	B	D	A
Approach Delay		13.4			42.6			32.9			31.3	
Approach LOS		B			D			C			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 101.8

Natural Cycle: 75

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.75

Intersection Signal Delay: 30.7


Intersection LOS: C

Intersection Capacity Utilization 71.3%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr

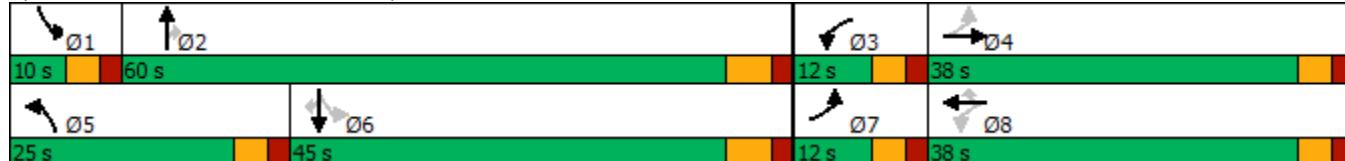

Intersection

Int Delay, s/veh 10.8

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	3	121	32	2	71	40	73	264	20	48	118	6
Future Vol, veh/h	3	121	32	2	71	40	73	264	20	48	118	6
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	87	87	87	83	83	83	87	87	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	146	39	2	82	46	88	318	24	55	136	7

Major/Minor	Major1	Major2		Minor1		Minor2						
Conflicting Flow All	128	0	0	185	0	0	355	306	166	454	302	105
Stage 1	-	-	-	-	-	-	174	174	-	109	109	-
Stage 2	-	-	-	-	-	-	181	132	-	345	193	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1458	-	-	1390	-	-	600	608	878	516	611	949
Stage 1	-	-	-	-	-	-	828	755	-	896	805	-
Stage 2	-	-	-	-	-	-	821	787	-	671	741	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1458	-	-	1390	-	-	492	606	878	293	609	949
Mov Cap-2 Maneuver	-	-	-	-	-	-	492	606	-	293	609	-
Stage 1	-	-	-	-	-	-	826	753	-	893	804	-
Stage 2	-	-	-	-	-	-	677	786	-	376	739	-

Approach	EB	WB		NB		SB					
HCM Control Delay, s	0.1	0.1		16.9		14.6					
HCM LOS				C		B					
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)		492	620	1458	-	-	1390	-	-	293	620
HCM Lane V/C Ratio		0.179	0.552	0.002	-	-	0.002	-	-	0.188	0.23
HCM Control Delay (s)		13.9	17.7	7.5	-	-	7.6	-	-	20.1	12.5
HCM Lane LOS		B	C	A	-	-	A	-	-	C	B
HCM 95th %tile Q(veh)		0.6	3.4	0	-	-	0	-	-	0.7	0.9

Intersection						
Approach		EB	WB	NB	SB	
Entry Lanes		1	1	1	1	
Conflicting Circle Lanes		1	1	1	1	
Adj Approach Flow, veh/h		394	424	448	990	
Demand Flow Rate, veh/h		402	433	457	1009	
Vehicles Circulating, veh/h		966	458	812	310	
Vehicles Exiting, veh/h		277	811	556	346	
Ped Vol Crossing Leg, #/h		0	0	0	0	
Ped Cap Adj		1.000	1.000	1.000	1.000	
Approach Delay, s/veh		31.9	3.0	26.5	31.7	
Approach LOS		D	A	D	D	
Lane	Left	Left	Bypass	Left	Left	Bypass
Designated Moves	LTR	LT	R	LTR	LT	R
Assumed Moves	LTR	LT	R	LTR	LT	R
RT Channelized			Free			Free
Lane Util	1.000	1.000		1.000	1.000	
Follow-Up Headway, s	2.609	2.609		2.609	2.609	
Critical Headway, s	4.976	4.976	235	4.976	4.976	76
Entry Flow, veh/h	402	198	1938	457	933	1938
Cap Entry Lane, veh/h	515	865	0.980	603	1006	0.980
Entry HV Adj Factor	0.981	0.979	230	0.980	0.981	75
Flow Entry, veh/h	394	194	1900	448	915	1900
Cap Entry, veh/h	505	846	0.121	591	987	0.039
V/C Ratio	0.780	0.229	0.0	0.758	0.928	0.0
Control Delay, s/veh	31.9	6.7	A	26.5	34.3	A
LOS	D	A	0	D	D	0
95th %tile Queue, veh	7	1		7	15	

Intersection							
Int Delay, s/veh	1.1						
Movement	EBT	EBR	WBL	WBT	NBL	NBR	
Lane Configurations	↑	↗	↖	↑↑	↖	↗	
Traffic Vol, veh/h	707	43	39	326	20	25	
Future Vol, veh/h	707	43	39	326	20	25	
Conflicting Peds, #/hr	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Stop	Stop	
RT Channelized	-	None	-	None	-	None	
Storage Length	-	235	235	-	0	0	
Veh in Median Storage, #	0	-	-	0	0	-	
Grade, %	0	-	-	0	0	-	
Peak Hour Factor	85	85	85	85	85	85	
Heavy Vehicles, %	2	2	2	2	2	2	
Mvmt Flow	832	51	46	384	24	29	
Major/Minor							
Major/Minor	Major1	Major2	Minor1				
Conflicting Flow All	0	0	883	0	1116	832	
Stage 1	-	-	-	-	832	-	
Stage 2	-	-	-	-	284	-	
Critical Hdwy	-	-	4.13	-	6.63	6.23	
Critical Hdwy Stg 1	-	-	-	-	5.43	-	
Critical Hdwy Stg 2	-	-	-	-	5.83	-	
Follow-up Hdwy	-	-	2.219	-	3.519	3.319	
Pot Cap-1 Maneuver	-	-	764	-	215	368	
Stage 1	-	-	-	-	426	-	
Stage 2	-	-	-	-	740	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	-	-	764	-	202	368	
Mov Cap-2 Maneuver	-	-	-	-	202	-	
Stage 1	-	-	-	-	426	-	
Stage 2	-	-	-	-	696	-	
Approach							
Approach	EB	WB	NB				
HCM Control Delay, s	0	1.1	19.9				
HCM LOS			C				
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBT	EBR	WBL	WBT
Capacity (veh/h)		202	368	-	-	764	-
HCM Lane V/C Ratio	0.116	0.08	-	-	0.06	-	
HCM Control Delay (s)	25.2	15.6	-	-	10	-	
HCM Lane LOS	D	C	-	-	B	-	
HCM 95th %tile Q(veh)	0.4	0.3	-	-	0.2	-	

Intersection

Int Delay, s/veh 1.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↑	↖	↖	↑	↖	↖	↑	↖	↖	↑	↖
Traffic Vol, veh/h	65	275	393	4	136	24	176	314	5	57	547	52
Future Vol, veh/h	65	275	393	4	136	24	176	314	5	57	547	52
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	Free	-	-	Free	-	-	None	-	-	None
Storage Length	185	-	325	225	-	225	1000	-	0	785	-	785
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	85	85	85	74	74	74	94	94	94	91	91	91
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	76	324	462	5	184	32	187	334	5	63	601	57

Major/Minor	Minor2	Minor1		Major1		Major2	
Conflicting Flow All	1530	1440	-	1626	1492	-	658
Stage 1	727	727	-	708	708	-	-
Stage 2	803	713	-	918	784	-	-
Critical Hdwy	7.12	6.52	-	7.12	6.52	-	4.12
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-
Follow-up Hdwy	3.518	4.018	-	3.518	4.018	-	2.218
Pot Cap-1 Maneuver	96	~ 133	0	82	~ 123	0	930
Stage 1	415	429	0	426	438	0	-
Stage 2	377	435	0	326	404	0	-
Platoon blocked, %	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	~ 101	-	-	~ 93	-	930
Mov Cap-2 Maneuver	-	~ 101	-	-	~ 93	-	-
Stage 1	332	407	-	340	350	-	-
Stage 2	143	348	-	63	383	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s			3.5	0.7
HCM LOS	-	-		
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBln1 EBln2 EBln3 WBln1 WBln2 WBln3 SBL SBT SBR
Capacity (veh/h)	930	-	-	101 - - 93 - 1220 - -
HCM Lane V/C Ratio	0.201	-	-	3.203 - - 1.976 - 0.051 -
HCM Control Delay (s)	9.8	-	-	\$ 1081.5 0 -\$ 550.9 0 8.1 - -
HCM Lane LOS	A	-	-	F A - F A A - -
HCM 95th %tile Q(veh)	0.8	-	-	31.6 - - 15.7 - 0.2 - -

Notes

~: Volume exceeds capacity    \$: Delay exceeds 300s    +: Computation Not Defined    \*: All major volume in platoon

Timings  
106: US 24 & Stapleton Dr

2026 Total Traffic  
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	65	275	393	4	136	24	176	314	5	57	547	52
Future Volume (vph)	65	275	393	4	136	24	176	314	5	57	547	52
Turn Type	pm+pt	NA	Free	pm+pt	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		8			2	6		6
Detector Phase	7	4		3	8	8	5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	1.0		5.0	1.0	1.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.0	6.0		10.0	6.0	6.0	10.0	20.0	20.0	10.0	20.0	20.0
Total Split (s)	12.0	35.0		12.0	35.0	35.0	20.0	63.0	63.0	10.0	53.0	53.0
Total Split (%)	10.0%	29.2%		10.0%	29.2%	29.2%	16.7%	52.5%	52.5%	8.3%	44.2%	44.2%
Yellow Time (s)	3.0	3.0		3.0	3.0	3.0	3.0	4.0	4.0	3.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0	5.0	5.0	6.0	6.0	5.0	6.0	6.0
Lead/Lag	Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes								
Recall Mode	None	None		None	None	None	None	Max	Max	None	Max	Max
Act Effect Green (s)	26.3	25.1	104.2	22.3	17.9	17.9	11.0	58.4	58.4	56.0	49.9	49.9
Actuated g/C Ratio	0.25	0.24	1.00	0.21	0.17	0.17	0.11	0.56	0.56	0.54	0.48	0.48
v/c Ratio	0.30	0.72	0.29	0.03	0.58	0.08	0.52	0.32	0.01	0.11	0.67	0.07
Control Delay	32.1	47.0	0.5	27.5	48.2	0.4	50.8	15.8	0.0	10.2	28.2	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	32.1	47.0	0.5	27.5	48.2	0.4	50.8	15.8	0.0	10.2	28.2	0.2
LOS	C	D	A	C	D	A	D	B	A	B	C	A
Approach Delay		20.8			40.8			28.1			24.4	
Approach LOS		C			D			C			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 104.2

Natural Cycle: 75

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 25.4

Intersection LOS: C

Intersection Capacity Utilization 70.0%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr



Intersection

Int Delay, s/veh 10.7

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	2	38	87	21	128	46	39	111	1	91	257	1
Future Vol, veh/h	2	38	87	21	128	46	39	111	1	91	257	1
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	87	87	87	83	83	83	87	87	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	46	105	24	147	53	47	134	1	105	295	1

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	200	0	0	151	0	0	473	351	99	392	377	174
Stage 1	-	-	-	-	-	-	103	103	-	222	222	-
Stage 2	-	-	-	-	-	-	370	248	-	170	155	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1372	-	-	1430	-	-	501	573	957	567	555	869
Stage 1	-	-	-	-	-	-	903	810	-	780	720	-
Stage 2	-	-	-	-	-	-	650	701	-	832	769	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1372	-	-	1430	-	-	283	563	957	456	545	869
Mov Cap-2 Maneuver	-	-	-	-	-	-	283	563	-	456	545	-
Stage 1	-	-	-	-	-	-	902	809	-	779	708	-
Stage 2	-	-	-	-	-	-	372	689	-	693	768	-

Approach	EB	WB			NB			SB				
HCM Control Delay, s	0.1	0.8			15.2			18.2				
HCM LOS					C			C				
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	
Capacity (veh/h)		283	565	1372	-	-	1430	-	-	456	546	
HCM Lane V/C Ratio		0.166	0.239	0.002	-	-	0.017	-	-	0.229	0.543	
HCM Control Delay (s)		20.2	13.4	7.6	-	-	7.6	-	-	15.2	19.2	
HCM Lane LOS		C	B	A	-	-	A	-	-	C	C	
HCM 95th %tile Q(veh)		0.6	0.9	0	-	-	0.1	-	-	0.9	3.2	

Intersection						
Approach		EB	WB	NB	SB	
Entry Lanes		1	1	1	1	
Conflicting Circle Lanes		1	1	1	1	
Adj Approach Flow, veh/h		322	757	587	595	
Demand Flow Rate, veh/h		329	772	599	607	
Vehicles Circulating, veh/h		594	630	568	395	
Vehicles Exiting, veh/h		358	537	355	543	
Ped Vol Crossing Leg, #/h		0	0	0	0	
Ped Cap Adj		1.000	1.000	1.000	1.000	
Approach Delay, s/veh		10.8	4.3	22.9	11.8	
Approach LOS		B	A	C	B	
Lane	Left	Left	Bypass	Left	Left	Bypass
Designated Moves	LTR	LT	R	LTR	LT	R
Assumed Moves	LTR	LT	R	LTR	LT	R
RT Channelized			Free			Free
Lane Util	1.000	1.000		1.000	1.000	
Follow-Up Headway, s	2.609	2.609		2.609	2.609	
Critical Headway, s	4.976	4.976	464	4.976	4.976	50
Entry Flow, veh/h	329	308	1938	599	557	1938
Cap Entry Lane, veh/h	753	726	0.980	773	922	0.980
Entry HV Adj Factor	0.979	0.980	455	0.980	0.980	49
Flow Entry, veh/h	322	302	1900	587	546	1900
Cap Entry, veh/h	737	711	0.239	758	904	0.026
V/C Ratio	0.437	0.424	0.0	0.775	0.604	0.0
Control Delay, s/veh	10.8	10.9	A	22.9	12.9	A
LOS	B	B	1	C	B	0
95th %tile Queue, veh	2	2		8	4	

Intersection							
Int Delay, s/veh	3.4						
Movement	EBT	EBR	WBL	WBT	NBL	NBR	
Lane Configurations	↑	↗	↖	↑↑	↖	↗	
Traffic Vol, veh/h	368	66	80	679	90	76	
Future Vol, veh/h	368	66	80	679	90	76	
Conflicting Peds, #/hr	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Stop	Stop	
RT Channelized	-	None	-	None	-	None	
Storage Length	-	235	235	-	0	0	
Veh in Median Storage, #	0	-	-	0	0	-	
Grade, %	0	-	-	0	0	-	
Peak Hour Factor	85	85	85	85	85	85	
Heavy Vehicles, %	2	2	2	2	2	2	
Mvmt Flow	433	78	94	799	106	89	
Major/Minor							
Major/Minor	Major1	Major2	Minor1				
Conflicting Flow All	0	0	511	0	1021	433	
Stage 1	-	-	-	-	433	-	
Stage 2	-	-	-	-	588	-	
Critical Hdwy	-	-	4.13	-	6.63	6.23	
Critical Hdwy Stg 1	-	-	-	-	5.43	-	
Critical Hdwy Stg 2	-	-	-	-	5.83	-	
Follow-up Hdwy	-	-	2.219	-	3.519	3.319	
Pot Cap-1 Maneuver	-	-	1052	-	247	622	
Stage 1	-	-	-	-	653	-	
Stage 2	-	-	-	-	519	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	-	-	1052	-	225	622	
Mov Cap-2 Maneuver	-	-	-	-	225	-	
Stage 1	-	-	-	-	653	-	
Stage 2	-	-	-	-	473	-	
Approach							
Approach	EB	WB	NB				
HCM Control Delay, s	0	0.9	24.1				
HCM LOS			C				
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBT	EBR	WBL	WBT
Capacity (veh/h)		225	622	-	-	1052	-
HCM Lane V/C Ratio		0.471	0.144	-	-	0.089	-
HCM Control Delay (s)		34.5	11.8	-	-	8.8	-
HCM Lane LOS		D	B	-	-	A	-
HCM 95th %tile Q(veh)		2.3	0.5	-	-	0.3	-

Intersection

Int Delay, s/veh 2.5

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	48	141	255	5	269	48	419	604	8	20	467	72
Future Vol, veh/h	48	141	255	5	269	48	419	604	8	20	467	72
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	Free	-	-	Free	-	-	None	-	-	None
Storage Length	185	-	325	225	-	225	1000	-	0	785	-	785
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	93	93	93	85	85	85	92	92	92	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	52	152	274	6	316	56	455	657	9	22	519	80

Major/Minor	Minor2	Minor1		Major1		Major2			
Conflicting Flow All	2293	2139	-	2246	2210	-	599	0	0
Stage 1	563	563	-	1567	1567	-	-	-	-
Stage 2	1730	1576	-	679	643	-	-	-	-
Critical Hdwy	7.12	6.52	-	7.12	6.52	-	4.12	-	4.12
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-
Follow-up Hdwy	3.518	4.018	-	3.518	4.018	-	2.218	-	2.218
Pot Cap-1 Maneuver	~ 28	~ 49	0	30	~ 44	0	978	-	923
Stage 1	511	509	0	139	~ 172	0	-	-	-
Stage 2	112	170	0	441	468	0	-	-	-
Platoon blocked, %						-	-	-	-
Mov Cap-1 Maneuver	-	~ 26	-	-	~ 23	-	978	-	923
Mov Cap-2 Maneuver	-	~ 26	-	-	~ 23	-	-	-	-
Stage 1	273	497	-	74	~ 92	-	-	-	-
Stage 2	-	~ 91	-	299	457	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s			4.8	0.3
HCM LOS	-	-		
Minor Lane/Major Mvmt	NBL	NBT	NBR	SBL
Capacity (veh/h)	978	-	-	-
HCM Lane V/C Ratio	0.466	-	-	-
HCM Control Delay (s)	11.8	-	\$ 2473.5	0
HCM Lane LOS	B	-	-	F
HCM 95th %tile Q(veh)	2.5	-	-	18.7

Notes

~: Volume exceeds capacity    \$: Delay exceeds 300s    +: Computation Not Defined    \*: All major volume in platoon

Timings  
106: US 24 & Stapleton Dr

2026 Total Traffic  
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	48	141	255	5	269	48	419	604	8	20	467	72
Future Volume (vph)	48	141	255	5	269	48	419	604	8	20	467	72
Turn Type	pm+pt	NA	Free	pm+pt	NA	Perm	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		8			2	6		6
Detector Phase	7	4		3	8	8	5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	5.0	1.0		5.0	1.0	1.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	10.0	6.0		10.0	6.0	6.0	10.0	20.0	20.0	10.0	20.0	20.0
Total Split (s)	12.0	38.0		12.0	38.0	38.0	25.0	60.0	60.0	10.0	45.0	45.0
Total Split (%)	10.0%	31.7%		10.0%	31.7%	31.7%	20.8%	50.0%	50.0%	8.3%	37.5%	37.5%
Yellow Time (s)	3.0	3.0		3.0	3.0	3.0	3.0	4.0	4.0	3.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0	5.0	5.0	6.0	6.0	5.0	6.0	6.0
Lead/Lag	Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes								
Recall Mode	None	None		None	None	None	None	Max	Max	None	Max	Max
Act Effect Green (s)	31.5	30.3	106.3	27.6	23.2	23.2	18.0	59.2	59.2	45.8	39.7	39.7
Actuated g/C Ratio	0.30	0.29	1.00	0.26	0.22	0.22	0.17	0.56	0.56	0.43	0.37	0.37
v/c Ratio	0.24	0.29	0.17	0.02	0.78	0.12	0.78	0.63	0.01	0.07	0.75	0.12
Control Delay	28.2	31.5	0.2	24.6	53.6	0.5	54.0	23.4	0.0	13.7	39.7	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.2	31.5	0.2	24.6	53.6	0.5	54.0	23.4	0.0	13.7	39.7	0.3
LOS	C	C	A	C	D	A	D	C	A	B	D	A
Approach Delay		13.2			45.3			35.6			33.7	
Approach LOS		B			D			D			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 106.3

Natural Cycle: 75

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.78

Intersection Signal Delay: 32.5

Intersection LOS: C

Intersection Capacity Utilization 72.4%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr



Intersection

Int Delay, s/veh 11

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗
Traffic Vol, veh/h	3	121	32	2	71	45	73	239	20	103	104	6
Future Vol, veh/h	3	121	32	2	71	45	73	239	20	103	104	6
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	0	-	-	0	-	-	0	-	-	0	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	83	83	83	87	87	87	83	83	83	87	87	87
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	146	39	2	82	52	88	288	24	118	120	7

Major/Minor	Major1	Major2		Minor1		Minor2						
Conflicting Flow All	134	0	0	185	0	0	350	312	166	442	305	108
Stage 1	-	-	-	-	-	-	174	174	-	112	112	-
Stage 2	-	-	-	-	-	-	176	138	-	330	193	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1451	-	-	1390	-	-	605	603	878	526	608	946
Stage 1	-	-	-	-	-	-	828	755	-	893	803	-
Stage 2	-	-	-	-	-	-	826	782	-	683	741	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1451	-	-	1390	-	-	508	601	878	318	606	946
Mov Cap-2 Maneuver	-	-	-	-	-	-	508	601	-	318	606	-
Stage 1	-	-	-	-	-	-	826	753	-	890	802	-
Stage 2	-	-	-	-	-	-	697	781	-	409	739	-

Approach	EB	WB		NB		SB					
HCM Control Delay, s	0.1	0.1		16		17.4					
HCM LOS				C		C					
Minor Lane/Major Mvmt		NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	508	616	1451	-	-	-	1390	-	-	318	618
HCM Lane V/C Ratio	0.173	0.507	0.002	-	-	-	0.002	-	-	0.372	0.205
HCM Control Delay (s)	13.6	16.7	7.5	-	-	-	7.6	-	-	22.9	12.3
HCM Lane LOS	B	C	A	-	-	-	A	-	-	C	B
HCM 95th %tile Q(veh)	0.6	2.9	0	-	-	-	0	-	-	1.7	0.8

Intersection												
Approach	EB			WB			NB			SB		
Entry Lanes		2			2			2			2	
Conflicting Circle Lanes		2			2			2			2	
Adj Approach Flow, veh/h	743			527			561			1321		
Demand Flow Rate, veh/h	758			538			573			1347		
Vehicles Circulating, veh/h	983			731			895			486		
Vehicles Exiting, veh/h	433			698			846			587		
Ped Vol Crossing Leg, #/h	0			0			0			0		
Ped Cap Adj	1.000			1.000			1.000			1.000		
Approach Delay, s/veh	20.6			4.9			11.4			9.8		
Approach LOS	C			A			B			A		
Lane	Left	Right		Left	Right	Bypass	Left	Right	Bypass	Left	Right	Bypass
Designated Moves	LT	TR		LT	TR	R	LT	TR	R	L	LTR	R
Assumed Moves	LT	TR		LT	TR	R	LT	TR	R	L	TR	R
RT Channelized						Free			Free			Free
Lane Util	0.470	0.530		0.471	0.529		0.470	0.530		0.276	0.724	
Follow-Up Headway, s	2.667	2.535		2.667	2.535		2.667	2.535		2.667	2.535	
Critical Headway, s	4.645	4.328		4.645	4.328	196	4.645	4.328	39	4.645	4.328	417
Entry Flow, veh/h	356	402		161	181	1938	251	283	1938	257	673	1938
Cap Entry Lane, veh/h	546	616		689	763	0.980	593	664	0.980	863	939	0.980
Entry HV Adj Factor	0.981	0.980		0.979	0.982	192	0.980	0.980	38	0.981	0.980	409
Flow Entry, veh/h	349	394		158	178	1900	246	277	1900	252	660	1900
Cap Entry, veh/h	536	603		675	749	0.101	581	650	0.020	846	921	0.215
V/C Ratio	0.651	0.653		0.234	0.237	0.0	0.424	0.426	0.0	0.298	0.716	0.0
Control Delay, s/veh	21.6	19.7		8.1	7.5	A	12.8	11.7	A	7.5	16.7	A
LOS	C	C		A	A	0	B	B	0	A	C	1
95th %tile Queue, veh	5	5		1	1		2	2		1	6	

Intersection

Int Delay, s/veh 2

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑↑	↑↑	↑	↑	↑
Traffic Vol, veh/h	23	667	430	26	73	67
Future Vol, veh/h	23	667	430	26	73	67
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	235	-	-	235	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	25	725	467	28	79	73


Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	495	0	-	0	880	234
Stage 1	-	-	-	-	467	-
Stage 2	-	-	-	-	413	-
Critical Hdwy	4.14	-	-	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	2.22	-	-	-	3.52	3.32
Pot Cap-1 Maneuver	1065	-	-	-	287	768
Stage 1	-	-	-	-	597	-
Stage 2	-	-	-	-	636	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1065	-	-	-	280	768
Mov Cap-2 Maneuver	-	-	-	-	280	-
Stage 1	-	-	-	-	583	-
Stage 2	-	-	-	-	636	-

Approach	EB	WB	SB
HCM Control Delay, s	0.3	0	16.8
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1065	-	-	-	280	768
HCM Lane V/C Ratio	0.023	-	-	-	0.283	0.095
HCM Control Delay (s)	8.5	-	-	-	22.9	10.2
HCM Lane LOS	A	-	-	-	C	B
HCM 95th %tile Q(veh)	0.1	-	-	-	1.1	0.3

Timings  
105: Stapleton Dr & Dumont Dr

2042 Background Traffic  
AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑↑	↑↑	↑	↑	↑
Traffic Volume (vph)	13	727	425	81	223	31
Future Volume (vph)	13	727	425	81	223	31
Turn Type	pm+pt	NA	NA	Perm	Prot	Prot
Protected Phases	5	2	6		3	3
Permitted Phases	2			6		
Detector Phase	5	2	6	6	3	3
Switch Phase						
Minimum Initial (s)	5.0	20.0	20.0	20.0	25.0	25.0
Minimum Split (s)	10.0	25.0	25.0	25.0	30.0	30.0
Total Split (s)	12.0	90.0	78.0	78.0	30.0	30.0
Total Split (%)	10.0%	75.0%	65.0%	65.0%	25.0%	25.0%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	C-Max	C-Max	C-Max	Min	Min
Act Effect Green (s)	85.0	85.0	80.5	80.5	25.0	25.0
Actuated g/C Ratio	0.71	0.71	0.67	0.67	0.21	0.21
v/c Ratio	0.02	0.32	0.19	0.08	0.66	0.10
Control Delay	5.2	7.0	19.1	11.1	53.2	13.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	5.2	7.0	19.1	11.1	53.2	13.1
LOS	A	A	B	B	D	B
Approach Delay		6.9	17.8		48.2	
Approach LOS		A	B		D	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.66

Intersection Signal Delay: 17.6


Intersection LOS: B

Intersection Capacity Utilization 49.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 105: Stapleton Dr & Dumont Dr

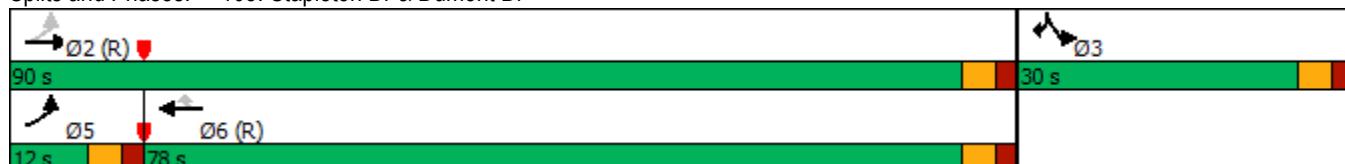

Timings  
106: US 24 & Stapleton Dr

2042 Background Traffic  
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	127	394	429	75	196	118	227	738	50	271	1463	82
Future Volume (vph)	127	394	429	75	196	118	227	738	50	271	1463	82
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	5	2		1	6		3	8		7	4	
Permitted Phases	2		Free	6		Free			8			4
Detector Phase	5	2		1	6		3	8	8	7	4	4
Switch Phase												
Minimum Initial (s)	5.0	10.0		8.0	5.0		8.0	5.0	5.0	5.0	15.0	15.0
Minimum Split (s)	10.0	15.0		13.0	10.0		13.0	11.0	11.0	10.0	20.0	20.0
Total Split (s)	15.0	25.0		15.0	25.0		30.0	60.0	60.0	20.0	50.0	50.0
Total Split (%)	12.5%	20.8%		12.5%	20.8%		25.0%	50.0%	50.0%	16.7%	41.7%	41.7%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max		None	C-Max		None	Max	Max	None	Max	Max
Act Effect Green (s)	31.5	23.5	120.0	29.5	20.4	120.0	13.7	56.1	56.1	13.9	56.3	56.3
Actuated g/C Ratio	0.26	0.20	1.00	0.25	0.17	1.00	0.11	0.47	0.47	0.12	0.47	0.47
v/c Ratio	0.42	0.60	0.29	0.32	0.34	0.08	0.61	0.47	0.07	0.72	0.90	0.10
Control Delay	40.8	53.3	0.5	35.5	45.9	0.1	57.2	23.2	0.2	72.5	29.3	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	40.8	53.3	0.5	35.5	45.9	0.1	57.2	23.2	0.2	72.5	29.3	0.2
LOS	D	D	A	D	D	A	E	C	A	E	C	A
Approach Delay		27.8			30.0			29.7			34.6	
Approach LOS		C			C			C			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 64 (53%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.90

Intersection Signal Delay: 31.4


Intersection LOS: C

Intersection Capacity Utilization 80.1%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr

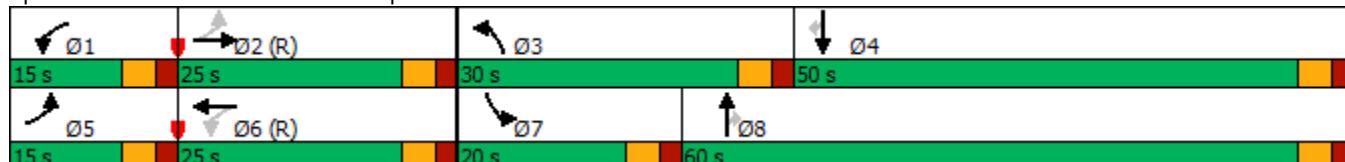

**Intersection**

Intersection Delay, s/veh 7.2

Intersection LOS A

Approach	EB	WB	NB	SB
Entry Lanes	2	2	2	2
Conflicting Circle Lanes	2	2	2	2
Adj Approach Flow, veh/h	321	403	487	736
Demand Flow Rate, veh/h	327	411	497	751
Vehicles Circulating, veh/h	781	485	176	457
Vehicles Exiting, veh/h	427	188	932	439
Ped Vol Crossing Leg, #/h	0	0	0	0
Ped Cap Adj	1.000	1.000	1.000	1.000
Approach Delay, s/veh	8.3	6.4	5.0	8.7
Approach LOS	A	A	A	A

Lane	Left	Right	Left	Right	Left	Right	Left	Right
Designated Moves	LT	TR	LT	TR	LT	TR	LT	TR
Assumed Moves	LT	R	LT	TR	LT	TR	LT	TR
RT Channelized								
Lane Util	0.306	0.694	0.470	0.530	0.471	0.529	0.470	0.530
Follow-Up Headway, s	2.667	2.535	2.667	2.535	2.667	2.535	2.667	2.535
Critical Headway, s	4.645	4.328	4.645	4.328	4.645	4.328	4.645	4.328
Entry Flow, veh/h	100	227	193	218	234	263	353	398
Cap Entry Lane, veh/h	658	731	864	940	1148	1223	887	963
Entry HV Adj Factor	0.984	0.982	0.982	0.981	0.978	0.981	0.980	0.981
Flow Entry, veh/h	98	223	190	214	229	258	346	390
Cap Entry, veh/h	647	718	849	922	1123	1200	869	944
V/C Ratio	0.152	0.310	0.223	0.232	0.204	0.215	0.398	0.413
Control Delay, s/veh	7.3	8.8	6.6	6.2	5.0	4.9	8.8	8.5
LOS	A	A	A	A	A	A	A	A
95th %tile Queue, veh	1	1	1	1	1	1	2	2

Intersection												
Approach	EB			WB			NB			SB		
Entry Lanes		2			2			2			2	
Conflicting Circle Lanes		2			2			2			2	
Adj Approach Flow, veh/h	807			768			879			846		
Demand Flow Rate, veh/h	823			784			896			864		
Vehicles Circulating, veh/h	622			1282			897			605		
Vehicles Exiting, veh/h	559			444			548			1120		
Ped Vol Crossing Leg, #/h	0			0			0			0		
Ped Cap Adj	1.000			1.000			1.000			1.000		
Approach Delay, s/veh	12.6			10.5			18.3			6.2		
Approach LOS	B			B			C			A		
Lane	Left	Right		Left	Right	Bypass	Left	Right	Bypass	Left	Right	Bypass
Designated Moves	LT	TR		LT	TR	R	LT	TR	R	L	LTR	R
Assumed Moves	L	TR		LT	TR	R	LT	TR	R	L	TR	R
RT Channelized						Free			Free			Free
Lane Util	0.550	0.450		0.470	0.530		0.470	0.530		0.326	0.674	
Follow-Up Headway, s	2.667	2.535		2.667	2.535		2.667	2.535		2.667	2.535	
Critical Headway, s	4.645	4.328		4.645	4.328	341	4.645	4.328	67	4.645	4.328	288
Entry Flow, veh/h	453	370		208	235	1938	390	439	1938	188	388	1938
Cap Entry Lane, veh/h	762	837		415	478	0.980	591	662	0.980	774	849	0.980
Entry HV Adj Factor	0.980	0.981		0.981	0.979	334	0.980	0.981	66	0.979	0.980	282
Flow Entry, veh/h	444	363		204	230	1900	382	431	1900	184	380	1900
Cap Entry, veh/h	747	821		407	468	0.176	579	650	0.035	757	832	0.148
V/C Ratio	0.595	0.442		0.501	0.492	0.0	0.659	0.663	0.0	0.243	0.457	0.0
Control Delay, s/veh	14.6	10.0		19.9	17.4	A	20.7	19.0	A	7.5	10.2	A
LOS	B	B		C	C	1	C	C	0	A	B	1
95th %tile Queue, veh	4	2		3	3		5	5		1	2	

Intersection

Int Delay, s/veh 2.2

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑↑	↑↑	↑	↑	↑
Traffic Vol, veh/h	75	401	705	83	49	44
Future Vol, veh/h	75	401	705	83	49	44
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	235	-	-	235	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	82	436	766	90	53	48

Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	856	0	-	0	1148	383
Stage 1	-	-	-	-	766	-
Stage 2	-	-	-	-	382	-
Critical Hdwy	4.14	-	-	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	2.22	-	-	-	3.52	3.32
Pot Cap-1 Maneuver	780	-	-	-	192	615
Stage 1	-	-	-	-	419	-
Stage 2	-	-	-	-	660	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	780	-	-	-	172	615
Mov Cap-2 Maneuver	-	-	-	-	172	-
Stage 1	-	-	-	-	375	-
Stage 2	-	-	-	-	660	-

Approach	EB	WB	SB
HCM Control Delay, s	1.6	0	23.8
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	780	-	-	-	172	615
HCM Lane V/C Ratio	0.105	-	-	-	0.31	0.078
HCM Control Delay (s)	10.2	-	-	-	35.1	11.3
HCM Lane LOS	B	-	-	-	E	B
HCM 95th %tile Q(veh)	0.3	-	-	-	1.2	0.3

Timings  
105: Stapleton Dr & Dumont Dr

2042 Background Traffic  
PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑↑	↑↑	↑	↑	↑
Traffic Volume (vph)	31	420	766	246	148	22
Future Volume (vph)	31	420	766	246	148	22
Turn Type	pm+pt	NA	NA	Perm	Prot	Prot
Protected Phases	5	2	6		3	3
Permitted Phases	2			6		
Detector Phase	5	2	6	6	3	3
Switch Phase						
Minimum Initial (s)	5.0	20.0	20.0	20.0	25.0	25.0
Minimum Split (s)	10.0	25.0	25.0	25.0	30.0	30.0
Total Split (s)	12.0	85.0	73.0	73.0	35.0	35.0
Total Split (%)	10.0%	70.8%	60.8%	60.8%	29.2%	29.2%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead		Lag	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	None	C-Max	C-Max	C-Max	None	None
Act Effect Green (s)	85.0	85.0	78.1	78.1	25.0	25.0
Actuated g/C Ratio	0.71	0.71	0.65	0.65	0.21	0.21
v/c Ratio	0.08	0.18	0.36	0.24	0.44	0.07
Control Delay	5.6	6.1	18.5	8.3	45.8	14.5
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	5.6	6.1	18.5	8.3	45.8	14.5
LOS	A	A	B	A	D	B
Approach Delay		6.0	16.0		41.7	
Approach LOS		A	B		D	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.44

Intersection Signal Delay: 15.9


Intersection LOS: B

Intersection Capacity Utilization 54.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 105: Stapleton Dr & Dumont Dr

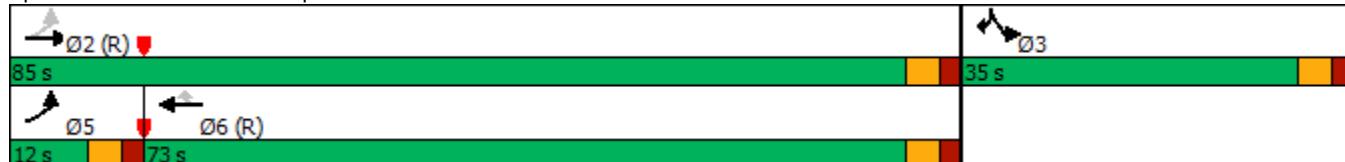

Timings  
106: US 24 & Stapleton Dr

2042 Background Traffic  
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	86	185	297	125	363	324	513	1574	150	245	1122	136
Future Volume (vph)	86	185	297	125	363	324	513	1574	150	245	1122	136
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	5	2		1	6		3	8		7	4	
Permitted Phases	2		Free	6		Free			8			4
Detector Phase	5	2		1	6		3	8	8	7	4	4
Switch Phase												
Minimum Initial (s)	5.0	10.0		8.0	5.0		8.0	5.0	5.0	5.0	15.0	15.0
Minimum Split (s)	10.0	15.0		13.0	10.0		13.0	11.0	11.0	20.0	20.0	20.0
Total Split (s)	15.0	25.0		15.0	25.0		36.0	60.0	60.0	20.0	44.0	44.0
Total Split (%)	12.5%	20.8%		12.5%	20.8%		30.0%	50.0%	50.0%	16.7%	36.7%	36.7%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max		None	C-Max		None	Max	Max	None	Max	Max
Act Effect Green (s)	29.4	20.4	120.0	30.6	21.0	120.0	24.1	56.5	56.5	13.5	45.9	45.9
Actuated g/C Ratio	0.24	0.17	1.00	0.26	0.18	1.00	0.20	0.47	0.47	0.11	0.38	0.38
v/c Ratio	0.37	0.32	0.20	0.40	0.62	0.22	0.78	0.99	0.20	0.67	0.85	0.20
Control Delay	43.7	53.5	0.4	36.9	51.1	0.3	53.9	52.9	7.2	65.2	26.1	1.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	43.7	53.5	0.4	36.9	51.1	0.3	53.9	52.9	7.2	65.2	26.1	1.6
LOS	D	D	A	D	D	A	D	D	A	E	C	A
Approach Delay		24.2			28.6			50.0			30.3	
Approach LOS		C			C			D			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 64 (53%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 38.0


Intersection LOS: D

Intersection Capacity Utilization 82.4%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr

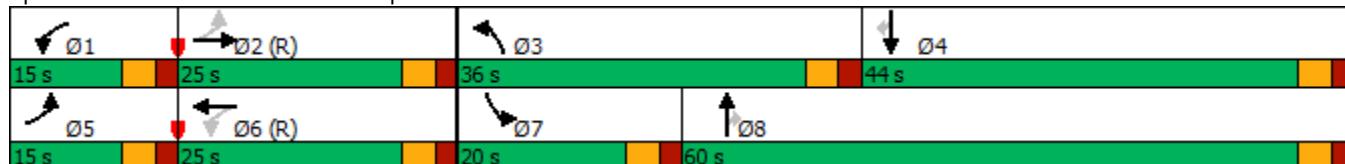

**Intersection**

Intersection Delay, s/veh 9.8

Intersection LOS A

Approach	EB	WB	NB	SB
Entry Lanes	2	2	2	2
Conflicting Circle Lanes	2	2	2	2
Adj Approach Flow, veh/h	414	245	940	584
Demand Flow Rate, veh/h	423	251	958	596
Vehicles Circulating, veh/h	601	929	546	490
Vehicles Exiting, veh/h	485	575	478	690
Ped Vol Crossing Leg, #/h	0	0	0	0
Ped Cap Adj	1.000	1.000	1.000	1.000
Approach Delay, s/veh	7.4	8.6	12.4	7.8
Approach LOS	A	A	B	A

Lane	Left	Right	Left	Right	Left	Right	Left	Right
Designated Moves	LT	TR	LT	TR	LT	TR	LT	TR
Assumed Moves	LT	TR	LT	TR	LT	TR	LT	TR
RT Channelized								
Lane Util	0.470	0.530	0.470	0.530	0.470	0.530	0.470	0.530
Follow-Up Headway, s	2.667	2.535	2.667	2.535	2.667	2.535	2.667	2.535
Critical Headway, s	4.645	4.328	4.645	4.328	4.645	4.328	4.645	4.328
Entry Flow, veh/h	199	224	118	133	450	508	280	316
Cap Entry Lane, veh/h	777	852	574	645	817	893	860	936
Entry HV Adj Factor	0.978	0.980	0.977	0.977	0.981	0.980	0.981	0.980
Flow Entry, veh/h	195	220	115	130	442	498	275	310
Cap Entry, veh/h	760	835	561	630	802	875	843	917
V/C Ratio	0.256	0.263	0.205	0.206	0.551	0.569	0.326	0.338
Control Delay, s/veh	7.6	7.2	9.1	8.2	12.6	12.2	7.9	7.6
LOS	A	A	A	A	B	B	A	A
95th %tile Queue, veh	1	1	1	1	3	4	1	1

Intersection												
Approach	EB			WB			NB			SB		
Entry Lanes		2			2			2			2	
Conflicting Circle Lanes		2			2			2			2	
Adj Approach Flow, veh/h	857			588			606			1385		
Demand Flow Rate, veh/h	874			599			619			1412		
Vehicles Circulating, veh/h	1060			731			1076			530		
Vehicles Exiting, veh/h	465			879			858			587		
Ped Vol Crossing Leg, #/h	0			0			0			0		
Ped Cap Adj	1.000			1.000			1.000			1.000		
Approach Delay, s/veh	33.0			5.3			13.8			10.9		
Approach LOS		D			A			B			B	
Lane	Left	Right		Left	Right	Bypass	Left	Right	Bypass	Left	Right	Bypass
Designated Moves	LT	TR		LT	TR	R	LT	TR	R	L	LTR	R
Assumed Moves	LT	TR		LT	TR	R	LT	TR	R	L	TR	R
RT Channelized						Free			Free			Free
Lane Util	0.470	0.530		0.469	0.531		0.470	0.530		0.324	0.676	
Follow-Up Headway, s	2.667	2.535		2.667	2.535		2.667	2.535		2.667	2.535	
Critical Headway, s	4.645	4.328		4.645	4.328	213	4.645	4.328	85	4.645	4.328	417
Entry Flow, veh/h	411	463		181	205	1938	251	283	1938	322	673	1938
Cap Entry Lane, veh/h	509	577		689	763	0.980	502	569	0.980	829	905	0.980
Entry HV Adj Factor	0.980	0.981		0.983	0.979	209	0.980	0.980	83	0.981	0.980	409
Flow Entry, veh/h	403	454		178	201	1900	246	277	1900	316	660	1900
Cap Entry, veh/h	499	566		678	747	0.110	492	558	0.044	814	887	0.215
V/C Ratio	0.807	0.803		0.263	0.269	0.0	0.500	0.497	0.0	0.388	0.744	0.0
Control Delay, s/veh	35.0	31.3		8.5	7.9	A	16.9	15.2	A	9.1	18.5	A
LOS	D	D		A	A	0	C	C	0	A	C	1
95th %tile Queue, veh	8	8		1	1		3	3		2	7	

Intersection

Int Delay, s/veh 8.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	23	745	137	140	465	26	24	1	25	73	3	67
Future Vol, veh/h	23	745	137	140	465	26	24	1	25	73	3	67
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	235	-	0	235	-	235	0	-	-	0	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	25	810	149	152	505	28	26	1	27	79	3	73

Major/Minor	Major1	Major2		Minor1		Minor2						
Conflicting Flow All	533	0	0	959	0	0	1418	1697	405	1265	1818	253
Stage 1	-	-	-	-	-	-	860	860	-	809	809	-
Stage 2	-	-	-	-	-	-	558	837	-	456	1009	-
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	6.54	6.94
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	4.02	3.32
Pot Cap-1 Maneuver	1031	-	-	713	-	-	97	92	595	126	77	746
Stage 1	-	-	-	-	-	-	317	371	-	340	392	-
Stage 2	-	-	-	-	-	-	482	380	-	554	316	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1031	-	-	713	-	-	69	71	595	98	59	746
Mov Cap-2 Maneuver	-	-	-	-	-	-	69	71	-	98	59	-
Stage 1	-	-	-	-	-	-	309	362	-	332	309	-
Stage 2	-	-	-	-	-	-	339	299	-	514	308	-

Approach	EB	WB		NB		SB					
HCM Control Delay, s	0.2	2.5		48.1		68.7					
HCM LOS				E		F					
Minor Lane/Major Mvmt	NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	SBLn3
Capacity (veh/h)	69	463	1031	-	-	713	-	-	98	59	746
HCM Lane V/C Ratio	0.378	0.061	0.024	-	-	0.213	-	-	0.81	0.055	0.098
HCM Control Delay (s)	85.9	13.3	8.6	-	-	11.4	-	-	122.3	69.6	10.3
HCM Lane LOS	F	B	A	-	-	B	-	-	F	F	B
HCM 95th %tile Q(veh)	1.4	0.2	0.1	-	-	0.8	-	-	4.4	0.2	0.3

Timings  
104: Saybrook Dr & Stapleton Dr

2042 Total Traffic  
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	23	745	137	140	465	26	24	1	73	3	67
Future Volume (vph)	23	745	137	140	465	26	24	1	73	3	67
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	pm+pt	NA	Perm
Protected Phases	5	2		1	6		3	8	7	4	
Permitted Phases	2		2	6		6	8		4		4
Detector Phase	5	2	2	1	6	6	3	8	7	4	4
Switch Phase											
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	5.0	10.0	5.0	10.0	10.0
Minimum Split (s)	10.0	25.0	25.0	10.0	25.0	25.0	10.0	15.0	10.0	15.0	15.0
Total Split (s)	12.0	71.0	71.0	12.0	71.0	71.0	12.0	25.0	12.0	25.0	25.0
Total Split (%)	10.0%	59.2%	59.2%	10.0%	59.2%	59.2%	10.0%	20.8%	10.0%	20.8%	20.8%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes										
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	None	Max	Max
Act Effect Green (s)	72.1	66.0	66.0	75.3	71.1	71.1	27.8	22.4	29.0	24.8	24.8
Actuated g/C Ratio	0.60	0.55	0.55	0.63	0.59	0.59	0.23	0.19	0.24	0.21	0.21
v/c Ratio	0.04	0.42	0.16	0.39	0.24	0.03	0.08	0.09	0.23	0.01	0.18
Control Delay	7.8	16.6	2.4	16.9	6.2	0.1	33.6	16.2	36.1	42.0	3.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	7.8	16.6	2.4	16.9	6.2	0.1	33.6	16.2	36.1	42.0	3.7
LOS	A	B	A	B	A	A	C	B	D	D	A
Approach Delay		14.2			8.3			24.6		20.9	
Approach LOS		B			A			C		C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 80 (67%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.42

Intersection Signal Delay: 12.9

Intersection LOS: B

Intersection Capacity Utilization 51.6%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 104: Saybrook Dr & Stapleton Dr



Timings  
105: Dumont Dr & Stapleton Dr

2042 Total Traffic  
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	76	723	43	39	553	132	20	1	25	262	1	51
Future Volume (vph)	76	723	43	39	553	132	20	1	25	262	1	51
Turn Type	pm+pt	NA	Perm									
Protected Phases	5	2		1	6		3	8		7	4	
Permitted Phases	2		2	6		6	8		8	4		4
Detector Phase	5	2	2	1	6	6	3	8	8	7	4	4
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	10.0	25.0	25.0	10.0	25.0	25.0	10.0	20.0	20.0	10.0	20.0	20.0
Total Split (s)	12.0	58.0	58.0	12.0	58.0	58.0	12.0	25.0	25.0	25.0	38.0	38.0
Total Split (%)	10.0%	48.3%	48.3%	10.0%	48.3%	48.3%	10.0%	20.8%	20.8%	20.8%	31.7%	31.7%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag									
Lead-Lag Optimize?	Yes											
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Min	Min	None	Min	Min
Act Effect Green (s)	72.7	66.2	66.2	70.6	65.1	65.1	16.4	10.0	10.0	34.4	27.3	27.3
Actuated g/C Ratio	0.61	0.55	0.55	0.59	0.54	0.54	0.14	0.08	0.08	0.29	0.23	0.23
v/c Ratio	0.17	0.40	0.05	0.11	0.31	0.15	0.10	0.01	0.10	0.70	0.00	0.12
Control Delay	7.4	10.2	0.1	3.2	6.5	2.1	33.2	51.0	0.7	46.4	39.0	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	7.4	10.2	0.1	3.2	6.5	2.1	33.2	51.0	0.7	46.4	39.0	0.6
LOS	A	B	A	A	A	A	C	D	A	D	D	A
Approach Delay		9.4			5.5			16.0			39.0	
Approach LOS		A			A			B			D	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 101 (84%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.70

Intersection Signal Delay: 12.9


Intersection LOS: B

Intersection Capacity Utilization 57.8%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 105: Dumont Dr & Stapleton Dr

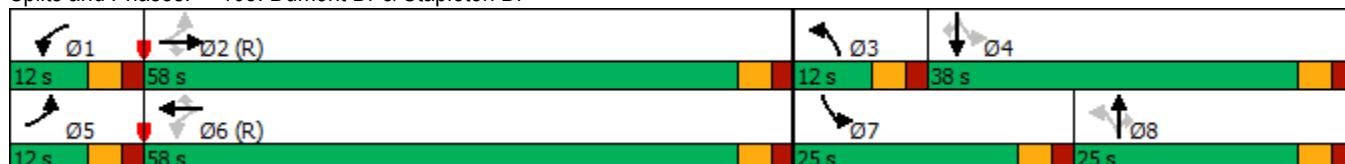

Timings  
106: US 24 & Stapleton Dr

2042 Total Traffic  
AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	140	406	465	75	239	118	358	738	50	271	1463	126
Future Volume (vph)	140	406	465	75	239	118	358	738	50	271	1463	126
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	5	2		1	6		3	8		7	4	
Permitted Phases	2		Free	6		Free			8			4
Detector Phase	5	2		1	6		3	8	8	7	4	4
Switch Phase												
Minimum Initial (s)	5.0	10.0		8.0	5.0		8.0	5.0	5.0	5.0	15.0	15.0
Minimum Split (s)	10.0	15.0		13.0	10.0		13.0	11.0	11.0	10.0	20.0	20.0
Total Split (s)	15.0	25.0		15.0	25.0		30.0	60.0	60.0	20.0	50.0	50.0
Total Split (%)	12.5%	20.8%		12.5%	20.8%		25.0%	50.0%	50.0%	16.7%	41.7%	41.7%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max		None	C-Max		None	Max	Max	None	Max	Max
Act Effect Green (s)	31.5	23.5	120.0	29.4	20.3	120.0	18.4	56.1	56.1	13.9	51.6	51.6
Actuated g/C Ratio	0.26	0.20	1.00	0.24	0.17	1.00	0.15	0.47	0.47	0.12	0.43	0.43
v/c Ratio	0.49	0.62	0.31	0.33	0.42	0.08	0.72	0.47	0.07	0.72	0.98	0.17
Control Delay	37.8	48.6	0.5	35.7	47.2	0.1	56.1	23.2	0.2	72.3	43.6	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	37.8	48.6	0.5	35.7	47.2	0.1	56.1	23.2	0.2	72.3	43.6	0.6
LOS	D	D	A	D	D	A	E	C	A	E	D	A
Approach Delay			24.9			32.4			32.5			44.9
Approach LOS			C			C			C			D

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 64 (53%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.98

Intersection Signal Delay: 35.9


Intersection LOS: D

Intersection Capacity Utilization 85.2%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr

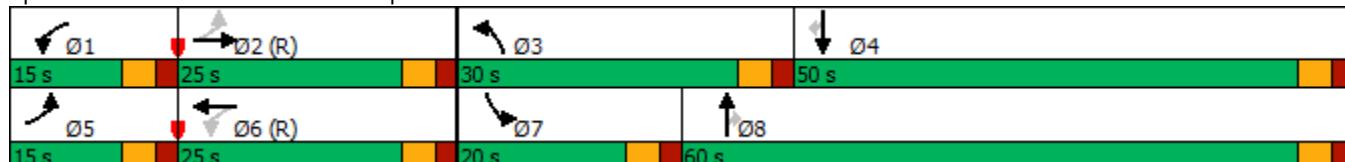

**Intersection**

Intersection Delay, s/veh 7.4

Intersection LOS A

Approach	EB	WB	NB	SB
Entry Lanes	2	2	2	2
Conflicting Circle Lanes	2	2	2	2
Adj Approach Flow, veh/h	321	427	511	749
Demand Flow Rate, veh/h	327	436	522	765
Vehicles Circulating, veh/h	795	510	184	457
Vehicles Exiting, veh/h	427	196	938	489
Ped Vol Crossing Leg, #/h	0	0	0	0
Ped Cap Adj	1.000	1.000	1.000	1.000
Approach Delay, s/veh	8.5	6.8	5.1	8.8
Approach LOS	A	A	A	A

Lane	Left	Right	Left	Right	Left	Right	Left	Right
Designated Moves	LT	TR	LT	TR	LT	TR	LT	TR
Assumed Moves	LT	R	LT	TR	LT	TR	LT	TR
RT Channelized								
Lane Util	0.306	0.694	0.470	0.530	0.469	0.531	0.471	0.529
Follow-Up Headway, s	2.667	2.535	2.667	2.535	2.667	2.535	2.667	2.535
Critical Headway, s	4.645	4.328	4.645	4.328	4.645	4.328	4.645	4.328
Entry Flow, veh/h	100	227	205	231	245	277	360	405
Cap Entry Lane, veh/h	650	722	844	921	1140	1214	887	963
Entry HV Adj Factor	0.984	0.982	0.980	0.980	0.981	0.979	0.978	0.980
Flow Entry, veh/h	98	223	201	226	240	271	352	397
Cap Entry, veh/h	639	710	827	902	1118	1188	867	944
V/C Ratio	0.154	0.314	0.243	0.251	0.215	0.228	0.406	0.421
Control Delay, s/veh	7.4	9.0	7.0	6.6	5.2	5.1	9.0	8.7
LOS	A	A	A	A	A	A	A	A
95th %tile Queue, veh	1	1	1	1	1	1	2	2

Intersection

Int Delay, s/veh 0.1

Movement	EBL	EBT	WBT	WBR	SBL	SBR
----------	-----	-----	-----	-----	-----	-----

Lane Configurations						
Traffic Vol, veh/h	0	842	620	4	0	11
Future Vol, veh/h	0	842	620	4	0	11
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	200	-	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	915	674	4	0	12

Major/Minor	Major1	Major2	Minor2
-------------	--------	--------	--------

Conflicting Flow All	-	0	-	0	-	337
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	-	-	-	-	6.94
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	-	-	-	-	3.32
Pot Cap-1 Maneuver	0	-	-	-	0	659
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	-	-	659
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-

Approach	EB	WB	SB
----------	----	----	----

HCM Control Delay, s	0	0	10.6
HCM LOS			B

Minor Lane/Major Mvmt	EBT	WBT	WBR	SBLn1
-----------------------	-----	-----	-----	-------

Capacity (veh/h)	-	-	-	659
HCM Lane V/C Ratio	-	-	-	0.018
HCM Control Delay (s)	-	-	-	10.6
HCM Lane LOS	-	-	-	B
HCM 95th %tile Q(veh)	-	-	-	0.1

Intersection												
Approach	EB			WB			NB			SB		
Entry Lanes		2			2			2			2	
Conflicting Circle Lanes		2			2			2			2	
Adj Approach Flow, veh/h	905			1056			919			902		
Demand Flow Rate, veh/h	923			1077			937			921		
Vehicles Circulating, veh/h	740			1282			1054			814		
Vehicles Exiting, veh/h	707			601			609			1120		
Ped Vol Crossing Leg, #/h	0			0			0			0		
Ped Cap Adj	1.000			1.000			1.000			1.000		
Approach Delay, s/veh	16.9			18.9			25.4			8.9		
Approach LOS	C			C			D			A		
Lane	Left	Right		Left	Right	Bypass	Left	Right	Bypass	Left	Right	Bypass
Designated Moves	LT	TR		LT	TR	R	LT	TR	R	L	LTR	R
Assumed Moves	LT	TR		LT	TR	R	LT	TR	R	L	TR	R
RT Channelized						Free			Free			Free
Lane Util	0.470	0.530		0.469	0.531		0.470	0.530		0.387	0.613	
Follow-Up Headway, s	2.667	2.535		2.667	2.535		2.667	2.535		2.667	2.535	
Critical Headway, s	4.645	4.328		4.645	4.328	425	4.645	4.328	108	4.645	4.328	288
Entry Flow, veh/h	434	489		306	346	1938	390	439	1938	245	388	1938
Cap Entry Lane, veh/h	683	757		415	478	0.980	512	580	0.980	638	711	0.980
Entry HV Adj Factor	0.980	0.981		0.982	0.979	417	0.980	0.981	106	0.980	0.980	282
Flow Entry, veh/h	425	480		300	339	1900	382	431	1900	240	380	1900
Cap Entry, veh/h	670	743		408	468	0.219	502	569	0.056	625	697	0.148
V/C Ratio	0.635	0.646		0.737	0.725	0.0	0.762	0.757	0.0	0.384	0.546	0.0
Control Delay, s/veh	17.4	16.5		33.6	29.0	A	30.4	27.2	A	11.2	13.9	A
LOS	C	C		D	D	1	D	D	0	B	B	1
95th %tile Queue, veh	5	5		6	6		7	7		2	3	

Intersection

Int Delay, s/veh 27.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	75	545	42	43	864	83	120	2	123	49	1	44
Future Vol, veh/h	75	545	42	43	864	83	120	2	123	49	1	44
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	235	-	0	235	-	235	0	-	-	0	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	82	592	46	47	939	90	130	2	134	53	1	48

Major/Minor	Major1	Major2		Minor1		Minor2						
Conflicting Flow All	1029	0	0	638	0	0	1320	1879	296	1494	1835	470
Stage 1	-	-	-	-	-	-	756	756	-	1033	1033	-
Stage 2	-	-	-	-	-	-	564	1123	-	461	802	-
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	6.54	6.94
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	4.02	3.32
Pot Cap-1 Maneuver	671	-	-	942	-	-	~115	71	700	85	75	540
Stage 1	-	-	-	-	-	-	366	414	-	249	308	-
Stage 2	-	-	-	-	-	-	478	279	-	550	395	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	671	-	-	942	-	-	~90	59	700	58	63	540
Mov Cap-2 Maneuver	-	-	-	-	-	-	~90	59	-	58	63	-
Stage 1	-	-	-	-	-	-	321	363	-	219	293	-
Stage 2	-	-	-	-	-	-	412	265	-	388	347	-

Approach	EB	WB		NB		SB					
HCM Control Delay, s	1.3	0.4		171.4		115.8					
HCM LOS				F		F					
Minor Lane/Major Mvmt	NBLn1	NBLn2	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	SBLn3
Capacity (veh/h)	90	596	671	-	-	942	-	-	58	63	540
HCM Lane V/C Ratio	1.449	0.228	0.121	-	-	0.05	-	-	0.918	0.017	0.089
HCM Control Delay (s)	\$ 336.6	12.8	11.1	-	-	9	-	-	209.9	63.1	12.3
HCM Lane LOS	F	B	B	-	-	A	-	-	F	F	B
HCM 95th %tile Q(veh)	10	0.9	0.4	-	-	0.2	-	-	4.2	0.1	0.3

Notes

~: Volume exceeds capacity    \$: Delay exceeds 300s    +: Computation Not Defined    \*: All major volume in platoon

Timings  
104: Saybrook Dr & Stapleton Dr

2042 Total Traffic  
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	75	545	42	43	864	83	120	2	49	1	44
Future Volume (vph)	75	545	42	43	864	83	120	2	49	1	44
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	pm+pt	NA	Perm
Protected Phases	5	2		1	6		3	8	7	4	
Permitted Phases	2		2	6		6	8		4		4
Detector Phase	5	2	2	1	6	6	3	8	7	4	4
Switch Phase											
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	5.0	10.0	5.0	10.0	10.0
Minimum Split (s)	10.0	25.0	25.0	10.0	25.0	25.0	10.0	15.0	10.0	15.0	15.0
Total Split (s)	12.0	71.0	71.0	12.0	71.0	71.0	12.0	25.0	12.0	25.0	25.0
Total Split (%)	10.0%	59.2%	59.2%	10.0%	59.2%	59.2%	10.0%	20.8%	10.0%	20.8%	20.8%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes										
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Max	None	Max	Max
Act Effect Green (s)	74.2	68.7	68.7	73.8	68.4	68.4	28.0	22.4	26.7	20.0	20.0
Actuated g/C Ratio	0.62	0.57	0.57	0.62	0.57	0.57	0.23	0.19	0.22	0.17	0.17
v/c Ratio	0.24	0.29	0.05	0.09	0.47	0.09	0.39	0.34	0.18	0.00	0.14
Control Delay	9.6	14.2	0.1	9.0	13.6	2.7	39.8	10.1	35.2	42.0	0.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	9.6	14.2	0.1	9.0	13.6	2.7	39.8	10.1	35.2	42.0	0.8
LOS	A	B	A	A	B	A	D	B	D	D	A
Approach Delay		12.8			12.5			24.6		19.1	
Approach LOS		B			B			C		B	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 80 (67%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.47

Intersection Signal Delay: 14.4

Intersection LOS: B

Intersection Capacity Utilization 59.7%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 104: Saybrook Dr & Stapleton Dr



Timings  
105: Dumont Dr & Stapleton Dr

2042 Total Traffic  
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	160	491	65	80	729	392	89	1	76	285	1	128
Future Volume (vph)	160	491	65	80	729	392	89	1	76	285	1	128
Turn Type	pm+pt	NA	Perm									
Protected Phases	5	2		1	6		3	8		7	4	
Permitted Phases	2		2	6		6	8		8	4		4
Detector Phase	5	2	2	1	6	6	3	8	8	7	4	4
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	5.0	10.0	10.0	5.0	10.0	10.0
Minimum Split (s)	10.0	25.0	25.0	10.0	25.0	25.0	10.0	20.0	20.0	10.0	20.0	20.0
Total Split (s)	12.0	58.0	58.0	12.0	58.0	58.0	12.0	25.0	25.0	25.0	38.0	38.0
Total Split (%)	10.0%	48.3%	48.3%	10.0%	48.3%	48.3%	10.0%	20.8%	20.8%	20.8%	31.7%	31.7%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag									
Lead-Lag Optimize?	Yes											
Recall Mode	None	C-Max	C-Max	None	C-Max	C-Max	None	Min	Min	None	Min	Min
Act Effect Green (s)	73.2	62.8	62.8	68.0	60.2	60.2	17.0	10.0	10.0	34.4	22.4	22.4
Actuated g/C Ratio	0.61	0.52	0.52	0.57	0.50	0.50	0.14	0.08	0.08	0.29	0.19	0.19
v/c Ratio	0.42	0.29	0.08	0.17	0.45	0.42	0.44	0.01	0.30	0.77	0.00	0.34
Control Delay	12.8	11.2	0.2	4.3	10.0	3.3	41.2	51.0	2.8	51.0	39.0	9.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	12.8	11.2	0.2	4.3	10.0	3.3	41.2	51.0	2.8	51.0	39.0	9.2
LOS	B	B	A	A	B	A	D	D	A	D	D	A
Approach Delay		10.6			7.5			23.7			38.1	
Approach LOS		B			A			C			D	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 101 (84%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 14.5


Intersection LOS: B

Intersection Capacity Utilization 64.0%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 105: Dumont Dr & Stapleton Dr

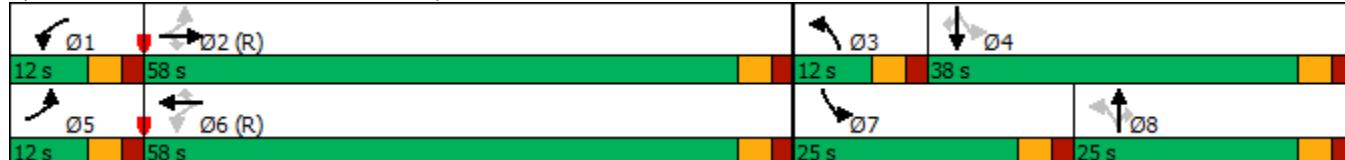

Timings  
106: US 24 & Stapleton Dr

2042 Total Traffic  
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	143	242	468	125	401	324	626	1574	150	245	1122	174
Future Volume (vph)	143	242	468	125	401	324	626	1574	150	245	1122	174
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	5	2		1	6		3	8		7	4	
Permitted Phases	2		Free	6		Free			8			4
Detector Phase	5	2		1	6		3	8	8	7	4	4
Switch Phase												
Minimum Initial (s)	5.0	10.0		8.0	5.0		8.0	5.0	5.0	5.0	15.0	15.0
Minimum Split (s)	10.0	15.0		13.0	10.0		13.0	11.0	11.0	20.0	20.0	20.0
Total Split (s)	15.0	25.0		15.0	25.0		36.0	60.0	60.0	20.0	44.0	44.0
Total Split (%)	12.5%	20.8%		12.5%	20.8%		30.0%	50.0%	50.0%	16.7%	36.7%	36.7%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max		None	C-Max		None	Max	Max	None	Max	Max
Act Effect Green (s)	30.2	20.4	120.0	29.8	20.2	120.0	27.4	56.5	56.5	13.5	42.6	42.6
Actuated g/C Ratio	0.25	0.17	1.00	0.25	0.17	1.00	0.23	0.47	0.47	0.11	0.36	0.36
v/c Ratio	0.65	0.42	0.31	0.44	0.71	0.22	0.84	0.99	0.20	0.67	0.91	0.27
Control Delay	43.6	43.2	0.6	37.9	54.5	0.3	54.5	52.9	7.2	64.7	33.1	1.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	43.6	43.2	0.6	37.9	54.5	0.3	54.5	52.9	7.2	64.7	33.1	1.9
LOS	D	D	A	D	D	A	D	D	A	E	C	A
Approach Delay		19.9			31.4			50.4			34.7	
Approach LOS		B			C			D			C	

Intersection Summary

Cycle Length: 120

Actuated Cycle Length: 120

Offset: 64 (53%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 38.5


Intersection LOS: D

Intersection Capacity Utilization 86.2%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 106: US 24 & Stapleton Dr

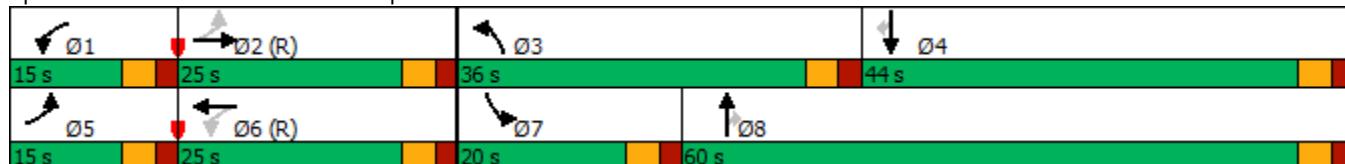

**Intersection**

Intersection Delay, s/veh 9.4

Intersection LOS A

Approach	EB	WB	NB	SB
Entry Lanes	2	2	2	2
Conflicting Circle Lanes	2	2	2	2
Adj Approach Flow, veh/h	414	266	1079	526
Demand Flow Rate, veh/h	423	272	1100	537
Vehicles Circulating, veh/h	542	1071	382	490
Vehicles Exiting, veh/h	485	411	583	853
Ped Vol Crossing Leg, #/h	0	0	0	0
Ped Cap Adj	1.000	1.000	1.000	1.000
Approach Delay, s/veh	6.9	10.4	11.1	7.3
Approach LOS	A	B	B	A

Lane	Left	Right	Left	Right	Left	Right	Left	Right
Designated Moves	LT	TR	LT	TR	LT	TR	LT	TR
Assumed Moves	LT	TR	LT	TR	LT	TR	LT	TR
RT Channelized								
Lane Util	0.470	0.530	0.471	0.529	0.470	0.530	0.469	0.531
Follow-Up Headway, s	2.667	2.535	2.667	2.535	2.667	2.535	2.667	2.535
Critical Headway, s	4.645	4.328	4.645	4.328	4.645	4.328	4.645	4.328
Entry Flow, veh/h	199	224	128	144	517	583	252	285
Cap Entry Lane, veh/h	820	896	504	571	950	1026	860	936
Entry HV Adj Factor	0.978	0.980	0.978	0.980	0.981	0.981	0.981	0.979
Flow Entry, veh/h	195	220	125	141	507	572	247	279
Cap Entry, veh/h	802	878	493	560	932	1007	844	916
V/C Ratio	0.243	0.250	0.254	0.252	0.544	0.568	0.293	0.304
Control Delay, s/veh	7.1	6.7	11.0	9.8	11.1	11.0	7.5	7.2
LOS	A	A	B	A	B	B	A	A
95th %tile Queue, veh	1	1	1	1	3	4	1	1

Intersection						
Int Delay, s/veh	0.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↑↑	↑↑	↗	↗	
Traffic Vol, veh/h	0	717	929	16	0	60
Future Vol, veh/h	0	717	929	16	0	60
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	200	-	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	779	1010	17	0	65
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	-	0	-	0	-	505
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	-	-	-	-	6.94
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	-	-	-	-	3.32
Pot Cap-1 Maneuver	0	-	-	-	0	512
Stage 1	0	-	-	-	0	-
Stage 2	0	-	-	-	0	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	-	-	512
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Approach	EB	WB	SB			
HCM Control Delay, s	0	0	13.1			
HCM LOS			B			
Minor Lane/Major Mvmt	EBT	WBT	WBR	SBLn1		
Capacity (veh/h)	-	-	-	512		
HCM Lane V/C Ratio	-	-	-	0.127		
HCM Control Delay (s)	-	-	-	13.1		
HCM Lane LOS	-	-	-	B		
HCM 95th %tile Q(veh)	-	-	-	0.4		

## **Appendix Table 1**

---

DRAFT



**Appendix Table 1**  
**Area Traffic Impact Studies by LSC**  
**4-Way Ranch Commercial**


<b>Study</b>	<b>Date</b>
<b>4-Way Ranch Commercial</b>	
4-Way Ranch Updated TIA	January 29, 2009
<b>Meridian Ranch</b>	
Meridian Ranch Sketch Plan TIA	April 11, 2011
Meridian Ranch Filing 11 Updated TIA	November 26, 2013
Stonebridge at Meridian Ranch Filing No. 1 Updated TIA	April 23, 2014
Stonebridge at Meridian Ranch Transportation Memorandum	July 28, 2015
Meridian Ranch Filing 8 Updated TIA	December 23, 2014
Meridian Ranch Filing 9 Updated TIA	May 21, 2015
Meridian Ranch Sketch Plan 2015 Amendment TIA	July 30, 2015
The Vistas at Meridian Ranch TIA	March 24, 2016
Meridian Ranch Estates Filing No. 2 Transportation Memorandum	August 27, 2015
The Vistas at Meridian Ranch Updated Transportation Memorandum	June 20, 2017
Londonderry Drive Pedestrian Operations and Safety Study	February 8, 2017
Stonebridge Filing 3 at Meridian Ranch Updated TIA	March 20, 2017
Meridian Ranch Sketch Plan 2017 Amendment TIA	October 3, 2017
WindingWalk at Meridian Ranch and The Enclave at Stonebridge at Meridian Ranch Updated Traffic Impact Analysis	May 10, 2018
Rolling Hills Ranch at Meridian Ranch PUDSP Traffic Impact Analysis	June 29, 2020
The Estates at Rolling Hills Ranch Filing No. 1 Traffic Impact Analysis	May 13, 2020
Rolling Hills Ranch at Meridian Ranch Filing No. 1 Traffic Impact Analysis	July 14, 2020
The Estates at Rolling Hills Ranch Filing No. 2 Traffic Impact Study	October 8, 2020
Rolling Hills Ranch at Meridian Ranch Filing No. 2 Transportation Memorandum	December 29, 2020
Rolling Hills Ranch at Meridian Ranch Filing No. 3 Transportation Memorandum	June 29, 2021
Meridian Ranch 2021 Sketch Plan Amendment Traffic Impact Study	June 25, 2021
The Sanctuary at Meridian Ranch Transportation Memorandum	May 3, 2022
<b>Grandview Reserve</b>	
Grandview Reserve Updated Master TIA	December 5, 2020
Grandview Reserve Phase 1 TIA	March 8, 2022
<b>Waterbury/4-Way Ranch</b>	
Waterbury PUD Development Plan Updated TIA	January 10, 2013
Waterbury Filing Nos. 1 and 2 TIA	December 18, 2020
<b>Meadowlake Ranch</b>	
Meadowlake Ranch Traffic Impact Analysis	May 29, 2019
<b>Latigo Preserve</b>	
Latigo Preserve Filing No. 10	March 31, 2022
<i>Source: LSC Transportation Consultants, Inc. (September 2022)</i>	

# MTCP Maps

---

DRAFT



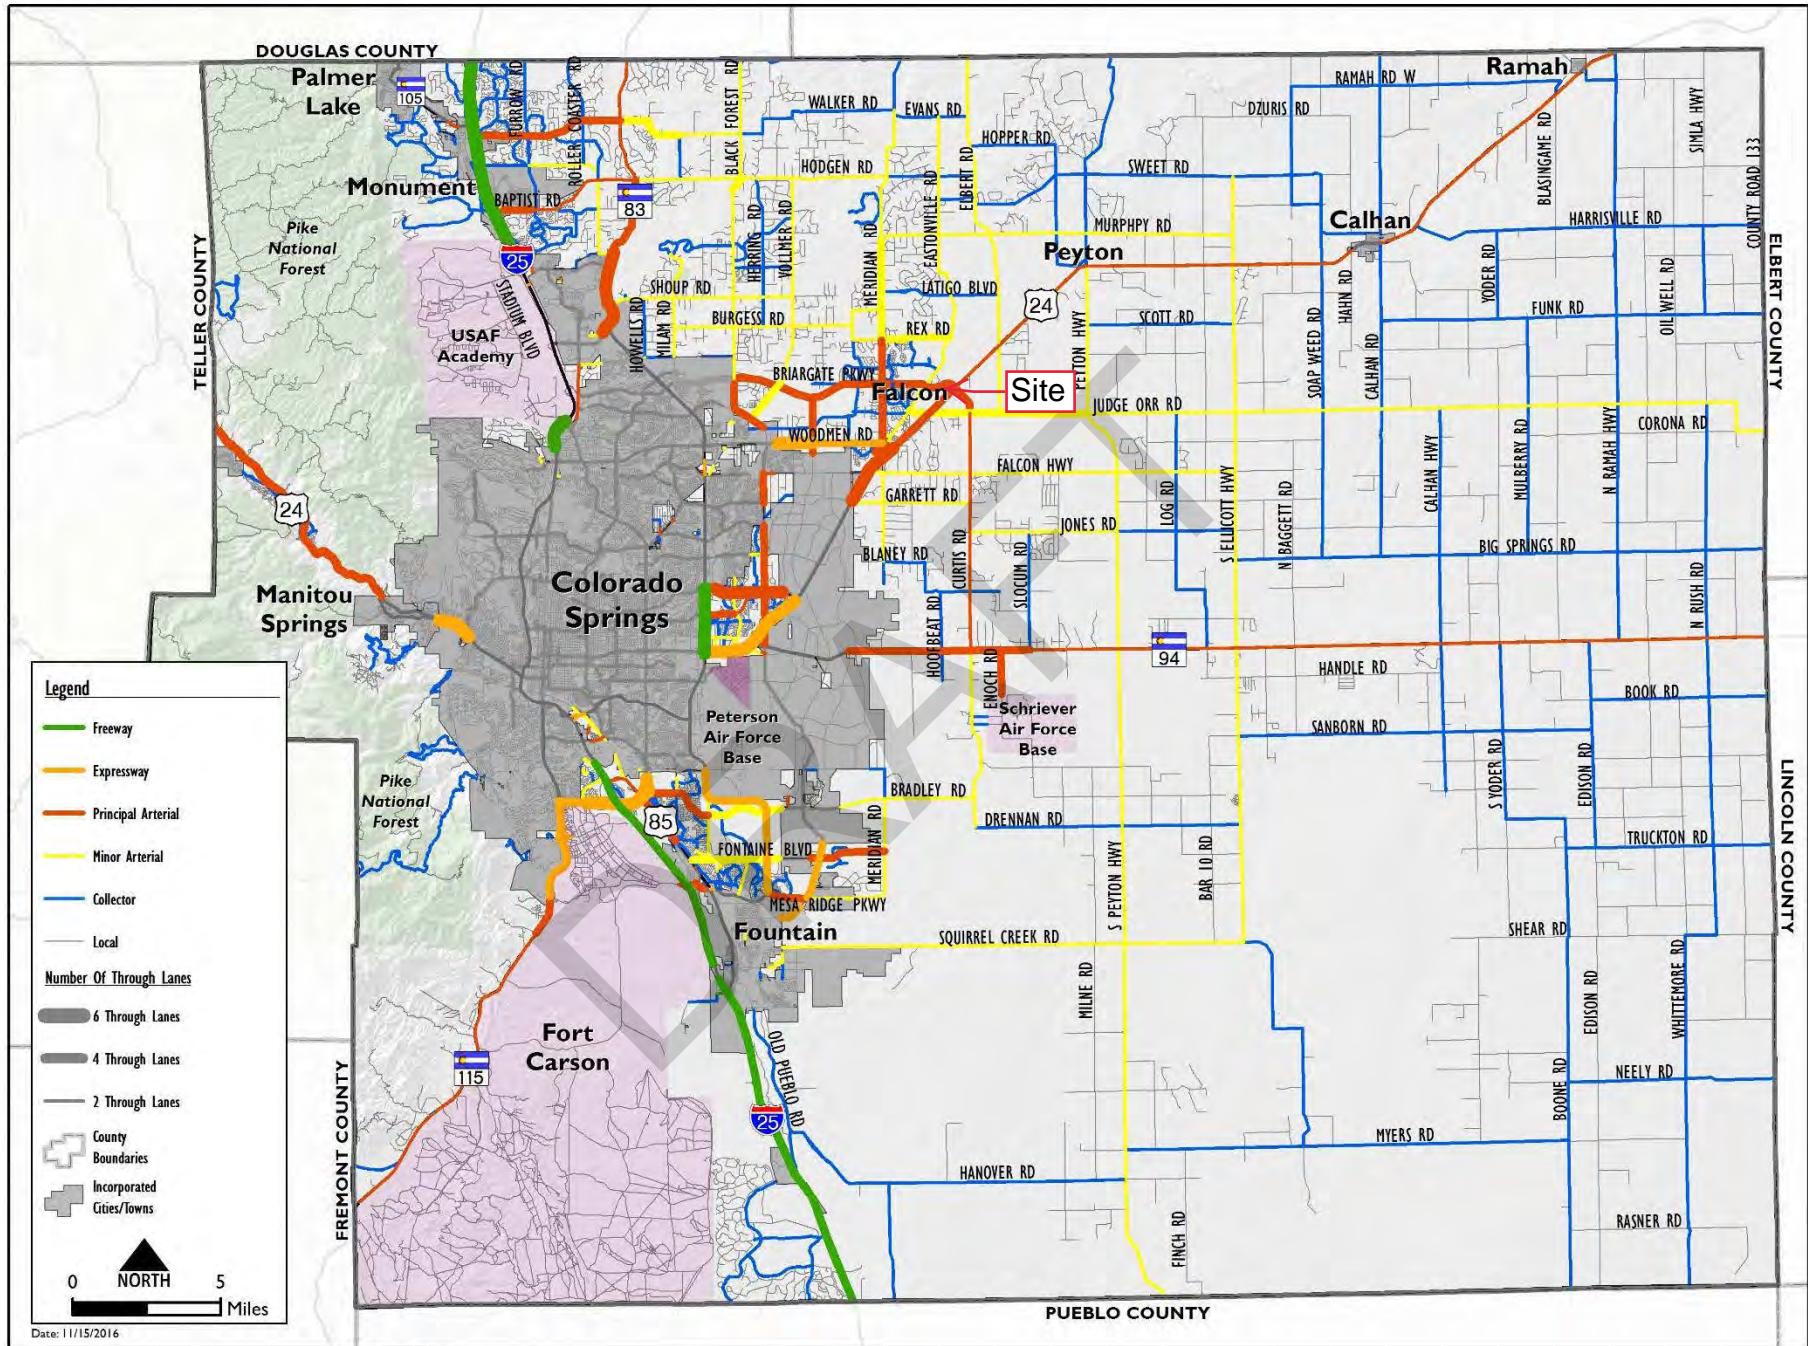

# Map 17: 2060 Corridor Preservation

