

File: C:\09002A\sterling ranch district\eng\const\eng\grading & erosion control\bank stabilization\branding iron 2 bank plans\CR01.dwg Plotstamp: 2/7/2020 3:00 PM

STANDARD CONSTRUCTION NOTES:

- ALL DRAINAGE AND ROADWAY CONSTRUCTION SHALL MEET THE STANDARDS AND SPECIFICATIONS OF THE CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL VOLUMES 1 AND 2, AND THE EL PASO COUNTY ENGINEERING CRITERIA MANUAL.
- CONTRACTOR SHALL BE RESPONSIBLE FOR THE NOTIFICATION AND FIELD LOCATION OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THE PLANS OR NOT, BEFORE BEGINNING CONSTRUCTION. LOCATION OF EXISTING UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. CALL 811 TO CONTACT THE UTILITY NOTIFICATION CENTER OF COLORADO SPRINGS.
- CONTRACTOR SHALL KEEP A COPY OF THESE APPROVED PLANS, THE GRADING AND EROSION CONTROL PLAN, THE STORMWATER MANAGEMENT PLAN (SWMP), THE SOILS AND GEOTECHNICAL REPORT AND THE APPROPRIATE DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS AT THE JOB SITE AT ALL TIME INCLUDING THE FOLLOWING:
  - EL PASO COUNTY ENGINEERING CRITERIA MANUAL (ECM)
  - CITY OF COLORADO SPRINGS/EL PASO COUNTY ENGINEERING CRITERIA MANUAL VOLUMES 1 AND 2.
  - COLORADO DEPARTMENT OF TRANSPORTATION (CDOT) STANDARDS SPECIFICATION FOR ROAD AND BRIDGE CONSTRUCTION.
  - CDOT M&S STANDARDS.
- IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ACCURACY SHOW EXISTING CONDITION BOTH ONSITE AND OFFSITE ON THE CONSTRUCTION PLANS. ANY MODIFICATION NECESSARY DUE TO CONFLICT OMISSIONS OR CHANGED CONDITIONS WILL BE ENTIRELY THE DEVELOPERS RESPONSIBILITY TO RECTIFY.
- ONCE THE ESQCP HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT CONTROL BMPs AS INDICATED ON THE GEC. A PRECONSTRUCTION MEETING BETWEEN THE CONTRACTOR, ENGINEER, AND EL PASO COUNTY WILL BE HELD PRIOR TO ANY CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE APPLICANT TO COORDINATE THE MEETING TIME AND PLACE WITH COUNTY DSD INSPECTIONS STAFF.
- IT IS THE CONTRACTORS RESPONSIBILITY TO UNDERSTAND THE REQUIREMENTS OF ALL JURISDICTIONAL AGENCIES AND TO OBTAIN ALL REQUIRED PERMITS, INCLUDING BUT NOT LIMITED TO EL PASO COUNTY EROSION AND STORM WATER QUALITY CONTROL PERMIT (ESQCP), US ARMY CORPS OF ENGINEER ISSUED 401 AND/OR 404 PERMITS AND COUNTY AND STATE FUGITIVE DUST PERMITS.
- ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE CONSTRUCTION SITE AT APPROVED CONSTRUCTION ACCESS POINTS.
- ANY TEMPORARY SIGNAGE AND STRIPING SHALL COMPLY WITH EL PASO COUNTY DOW AND MUTCD CRITERIA.
- CONTRACTOR SHALL OBTAIN ANY PERMITS REQUIRE BY EL PASO COUNTY DOT INCLUDING WORK WITHIN THE RIGHT-OF-WAY AND SPECIAL TRANSPORT PERMITS.
- THE LIMITS OF CONSTRUCTION SHALL REMAIN WITHIN THE PROPERTY LINE UNLESS OTHERWISE NOTED. THE OWNER/DEVELOPER SHALL OBTAIN WRITTEN PERMISSION AND EASEMENTS, WHERE REQUIRED, FROM ADJOINING PROPERTY OWNER(S) PRIOR TO ANY OFFSITE DISTURBANCE GRADING, OR CONSTRUCTION.

GRADING AND EROSION CONTROL NOTES:

- STORMWATER DISCHARGES FROM CONSTRUCTION SITES SHALL NOT CAUSE OR THREATEN TO CAUSE POLLUTION, CONTAMINATION, OR DEGRADATION OF STATE WATERS. ALL WORK AND EARTH DISTURBANCE SHALL BE DONE IN A MANNER THAT MINIMIZES POLLUTION OF ANY ON-SITE OR OFF-SITE WATERS, INCLUDING WETLANDS.
- NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS FROM REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING.
- A SEPARATE STORMWATER MANAGEMENT PLAN (SWMP) FOR THIS PROJECT SHALL BE COMPLETED AND AN EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP) ISSUED PRIOR TO COMMENCING CONSTRUCTION. MANAGEMENT OF THE SWMP DURING CONSTRUCTION IS THE RESPONSIBILITY OF THE DESIGNATED QUALIFIED STORMWATER MANAGER OR CERTIFIED EROSION CONTROL INSPECTOR. THE SWMP SHALL BE LOCATED ON SITE AT ALL TIMES DURING CONSTRUCTION AND SHALL BE KEPT UP TO DATE WITH WORK PROGRESS AND CHANGES IN THE FIELD.
- ONCE THE ESQCP IS APPROVED AND A "NOTICE TO PROCEED" HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT CONTROL MEASURES AS INDICATED ON THE APPROVED GEC. A PRECONSTRUCTION MEETING BETWEEN THE CONTRACTOR, ENGINEER, AND EL PASO COUNTY WILL BE HELD PRIOR TO ANY CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE APPLICANT TO COORDINATE THE MEETING TIME AND PLACE WITH COUNTY STAFF.
- CONTROL MEASURES MUST BE INSTALLED PRIOR TO COMMENCEMENT OF ACTIVITIES THAT COULD CONTRIBUTE POLLUTANTS TO STORMWATER. CONTROL MEASURES FOR ALL SLOPES, CHANNELS, DITCHES, AND DISTURBED LAND AREAS SHALL BE INSTALLED IMMEDIATELY UPON COMPLETION OF THE DISTURBANCE.
- ALL TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES SHALL BE MAINTAINED AND REMAIN IN EFFECTIVE OPERATING CONDITION UNTIL PERMANENT SOIL EROSION CONTROL MEASURES ARE IMPLEMENTED AND FINAL STABILIZATION IS ESTABLISHED. ALL PERSONS ENGAGED IN LAND DISTURBANCE ACTIVITIES SHALL ASSESS THE ADEQUACY OF CONTROL MEASURES AT THE SITE AND IDENTIFY IF CHANGES TO THOSE CONTROL MEASURES ARE NEEDED TO ENSURE THE CONTINUED EFFECTIVE PERFORMANCE OF THE CONTROL MEASURES. ALL CHANGES TO TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES MUST BE INCORPORATED INTO THE STORMWATER MANAGEMENT PLAN.
- TEMPORARY STABILIZATION SHALL BE IMPLEMENTED ON DISTURBED AREAS AND STOCKPILES WHERE GROUND DISTURBING CONSTRUCTION ACTIVITY HAS PERMANENTLY CEASED OR TEMPORARILY CEASED FOR LONGER THAN 14 DAYS.
- FINAL STABILIZATION MUST BE IMPLEMENTED AT ALL APPLICABLE CONSTRUCTION SITES. FINAL STABILIZATION IS ACHIEVED WHEN ALL GROUND DISTURBING ACTIVITIES ARE COMPLETE AND ALL DISTURBED AREAS EITHER HAVE A UNIFORM VEGETATIVE COVER WITH INDIVIDUAL PLANT DENSITY OF 70 PERCENT OF PRE-DISTURBANCE LEVELS ESTABLISHED OR EQUIVALENT PERMANENT ALTERNATIVE STABILIZATION METHOD IS IMPLEMENTED. ALL TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES SHALL BE REMOVED UPON FINAL STABILIZATION AND BEFORE PERMIT CLOSURE.
- ALL PERMANENT STORMWATER MANAGEMENT FACILITIES SHALL BE INSTALLED AS DESIGNED IN THE APPROVED PLANS. ANY PROPOSED CHANGES THAT EFFECT THE DESIGN OR FUNCTION OF PERMANENT STORMWATER MANAGEMENT STRUCTURES MUST BE APPROVED BY THE ECM ADMINISTRATOR PRIOR TO IMPLEMENTATION.
- EARTH DISTURBANCES SHALL BE CONDUCTED IN SUCH A MANNER SO AS TO EFFECTIVELY MINIMIZE ACCELERATED SOIL EROSION AND RESULTING SEDIMENTATION. ALL DISTURBANCES SHALL BE DESIGNED, CONSTRUCTED, AND COMPLETED SO THAT THE EXPOSED AREA OF ANY DISTURBED LAND SHALL BE LIMITED TO THE SHORTEST PRACTICAL PERIOD OF TIME. PRE-EXISTING VEGETATION SHALL BE PROTECTED AND MAINTAINED WITHIN 50 HORIZONTAL FEET OF A WATERS OF THE STATE UNLESS SHOWN TO BE INFEASIBLE AND SPECIFICALLY REQUESTED AND APPROVED.
- COMPACTION OF SOIL MUST BE PREVENTED IN AREAS DESIGNATED FOR INFILTRATION CONTROL MEASURES OR WHERE FINAL STABILIZATION WILL BE ACHIEVED BY VEGETATIVE COVER. AREAS DESIGNATED FOR INFILTRATION CONTROL MEASURES SHALL ALSO BE PROTECTED FROM SEDIMENTATION DURING CONSTRUCTION UNTIL FINAL STABILIZATION IS ACHIEVED. IF COMPACTION PREVENTION IS NOT FEASIBLE DUE TO SITE CONSTRAINTS, ALL AREAS DESIGNATED FOR INFILTRATION AND VEGETATION CONTROL MEASURES MUST BE LOOSENEED PRIOR TO INSTALLATION OF THE CONTROL MEASURES(S).
- ANY TEMPORARY OR PERMANENT FACILITY DESIGNED AND CONSTRUCTED FOR THE CONVEYANCE OF STORMWATER AROUND, THROUGH, OR FROM THE EARTH DISTURBANCE AREA SHALL BE A STABILIZED CONVEYANCE DESIGNED TO MINIMIZE EROSION AND THE DISCHARGE OF SEDIMENT OFF SITE.
- CONCRETE WASH WATER SHALL BE CONTAINED AND DISPOSED OF IN ACCORDANCE WITH THE SWMP. NO WASH WATER SHALL BE DISCHARGED TO OR ALLOWED TO ENTER STATE WATERS, INCLUDING ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR FACILITIES. CONCRETE WASHWATERS SHALL NOT BE LOCATED IN AN AREA WHERE SHALLOW GROUNDWATER MAY BE PRESENT, OR WITHIN 50 FEET OF A SURFACE WATER BODY, CREEK OR STREAM.
- DURING DEWATERING OPERATIONS OF UNCONTAMINATED GROUND WATER MAY BE DISCHARGED ON SITE, BUT SHALL NOT LEAVE THE SITE IN THE FORM OF SURFACE RUNOFF UNLESS AN APPROVED STATE DEWATERING PERMIT IS IN PLACE.
- EROSION CONTROL BLANKETING OR OTHER PROTECTIVE COVERING SHALL BE USED ON SLOPES STEEPER THAN 3:1.
- CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL WASTES FROM THE CONSTRUCTION SITE FOR DISPOSAL IN ACCORDANCE WITH LOCAL AND STATE REGULATORY REQUIREMENTS. NO CONSTRUCTION DEBRIS, TREE SLASH, BUILDING MATERIAL WASTES OR UNUSED BUILDING MATERIALS SHALL BE BURIED, DUMPED, OR DISCHARGED AT THE SITE.
- WASTE MATERIALS SHALL NOT BE TEMPORARILY PLACED OR STORED IN THE STREET, ALLEY, OR OTHER PUBLIC WAY, UNLESS IN ACCORDANCE WITH AN APPROVED TRAFFIC CONTROL PLAN. CONTROL MEASURES MAY BE REQUIRED BY EL PASO COUNTY ENGINEERING IF DEEMED NECESSARY, BASED ON SPECIFIC CONDITIONS AND CIRCUMSTANCES.
- TRACKING OF SOILS AND CONSTRUCTION DEBRIS OFF-SITE SHALL BE MINIMIZED. MATERIALS TRACKED OFF-SITE SHALL BE CLEANED UP AND PROPERLY DISPOSED OF IMMEDIATELY.
- THE OWNER/DEVELOPER SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL CONSTRUCTION DEBRIS, DIRT, TRASH, ROCK, SEDIMENT, SOIL, AND SAND THAT MAY ACCUMULATE IN ROADS, STORM DRAINS AND OTHER DRAINAGE CONVEYANCE SYSTEMS AND STORMWATER APPURTENANCES AS A RESULT OF SITE DEVELOPMENT.
- THE QUANTITY OF MATERIALS STORED ON THE PROJECT SITE SHALL BE LIMITED, AS MUCH AS PRACTICAL, TO THAT QUANTITY REQUIRED TO PERFORM THE WORK IN AN ORDERLY SEQUENCE. ALL MATERIALS STORED ON-SITE SHALL BE STORED IN A NEAT, ORDERLY MANNER, IN THEIR ORIGINAL CONTAINERS, WITH ORIGINAL MANUFACTURER'S LABELS.
- NO CHEMICAL(S) HAVING THE POTENTIAL TO BE RELEASED IN STORMWATER ARE TO BE STORED OR USED ONSITE UNLESS PERMISSION FOR THE USE OF SUCH CHEMICAL(S) IS GRANTED IN WRITING BY THE ECM ADMINISTRATOR. IN GRANTING APPROVAL FOR THE USE OF SUCH CHEMICAL(S), SPECIAL CONDITIONS AND MONITORING MAY BE REQUIRED.
- BULK STORAGE OF ALLOWED PETROLEUM PRODUCTS OR OTHER ALLOWED LIQUID CHEMICALS IN EXCESS OF 55 GALLONS SHALL REQUIRE ADEQUATE SECONDARY CONTAINMENT PROTECTION TO CONTAIN ALL SPILLS ONSITE AND TO PREVENT ANY SPILLED MATERIALS FROM ENTERING STATE WATERS, ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR OTHER FACILITIES.
- NO PERSON SHALL CAUSE THE IMPEDIMENT OF STORMWATER FLOW IN THE CURB AND GUTTER OR DITCH EXCEPT WITH APPROVED SEDIMENT CONTROL MEASURES.
- OWNER/DEVELOPER AND THEIR AGENTS SHALL COMPLY WITH THE "COLORADO WATER QUALITY CONTROL ACT" (TITLE 25, ARTICLE 8, CRS), AND THE "CLEAN WATER ACT" (33 USC 1344), IN ADDITION TO THE REQUIREMENTS OF THE LAND DEVELOPMENT CODE, DCM VOLUME II AND THE ECM APPENDIX I. ALL APPROPRIATE PERMITS MUST BE OBTAINED BY THE CONTRACTOR PRIOR TO CONSTRUCTION (0041, NPDES, FLOODPLAIN, 404, FUGITIVE DUST, ETC.), IN THE EVENT OF CONFLICTS BETWEEN THESE REQUIREMENTS AND OTHER LAWS, RULES, OR REGULATIONS OF OTHER FEDERAL, STATE, LOCAL, OR COUNTY AGENCIES, THE MOST RESTRICTIVE LAWS, RULES, OR REGULATIONS SHALL APPLY.
- ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE ONLY AT APPROVED CONSTRUCTION ACCESS POINTS.
- PRIOR TO CONSTRUCTION THE PERMITTEE SHALL VERIFY THE LOCATION OF EXISTING UTILITIES.
- A WATER SOURCE SHALL BE AVAILABLE ON SITE DURING EARTHWORK OPERATIONS AND SHALL BE UTILIZED AS REQUIRED TO MINIMIZE DUST FROM EARTHWORK EQUIPMENT AND WIND.
- THE SOILS REPORT FOR THIS SITE HAS BEEN PREPARED BY CTL THOMPSON, INC., ENTITLED GEOTECHNICAL INVESTIGATION TIMBERLINE LANDSCAPING OFFICE AND WAREHOUSE, DATED MAY 5, 2017, AND SHALL BE CONSIDERED A PART OF THESE PLANS.
- AT LEAST TEN (10) DAYS PRIOR TO THE ANTICIPATED START OF CONSTRUCTION, FOR PROJECTS THAT WILL DISTURB ONE (1) ACRE OR MORE, THE OWNER OR OPERATOR OF CONSTRUCTION ACTIVITY SHALL SUBMIT A PERMIT APPLICATION FOR STORMWATER DISCHARGE TO THE COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT, WATER QUALITY DIVISION. THE APPLICATION CONTAINS CERTIFICATION OF COMPLETION OF A STORMWATER MANAGEMENT PLAN (SWMP), OF WHICH THIS GRADING AND EROSION CONTROL PLAN MAY BE A PART. FOR INFORMATION OR APPLICATION MATERIALS CONTACT:  
  
COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT  
WATER QUALITY CONTROL DIVISION  
WOOD - PERMITS  
4300 CHERRY CREEK DRIVE SOUTH  
DENVER, CO 80246-1530  
ATTN: PERMITS UNIT

# BRANDING IRON AT STERLING RANCH FILING NO. 2


## COUNTY OF EL PASO, STATE OF COLORADO

### SAND CREEK BANK STABILIZATION PLAN

MAY 2020

TIMING: FEBRUARY 2020  
ANTICIPATED STARTING AND COMPLETION TIME PERIOD OF SITE GRADING: SEPTEMBER 2020  
EXPECTED DATE ON WHICH THE FINAL STABILIZATION WILL BE COMPLETED:  
AREAS 1.38 AC  
TOTAL AREA OF THE SITE TO BE CLEARED, EXCAVATED OR GRADED:  
RECEIVING WATERS: SAND CREEK

----- EXISTING INDEX CONTOUR (10')  
----- EXISTING NOMINAL CONTOUR (2')  
----- PROPOSED INDEX CONTOUR (10')  
----- PROPOSED NOMINAL CONTOUR (2')

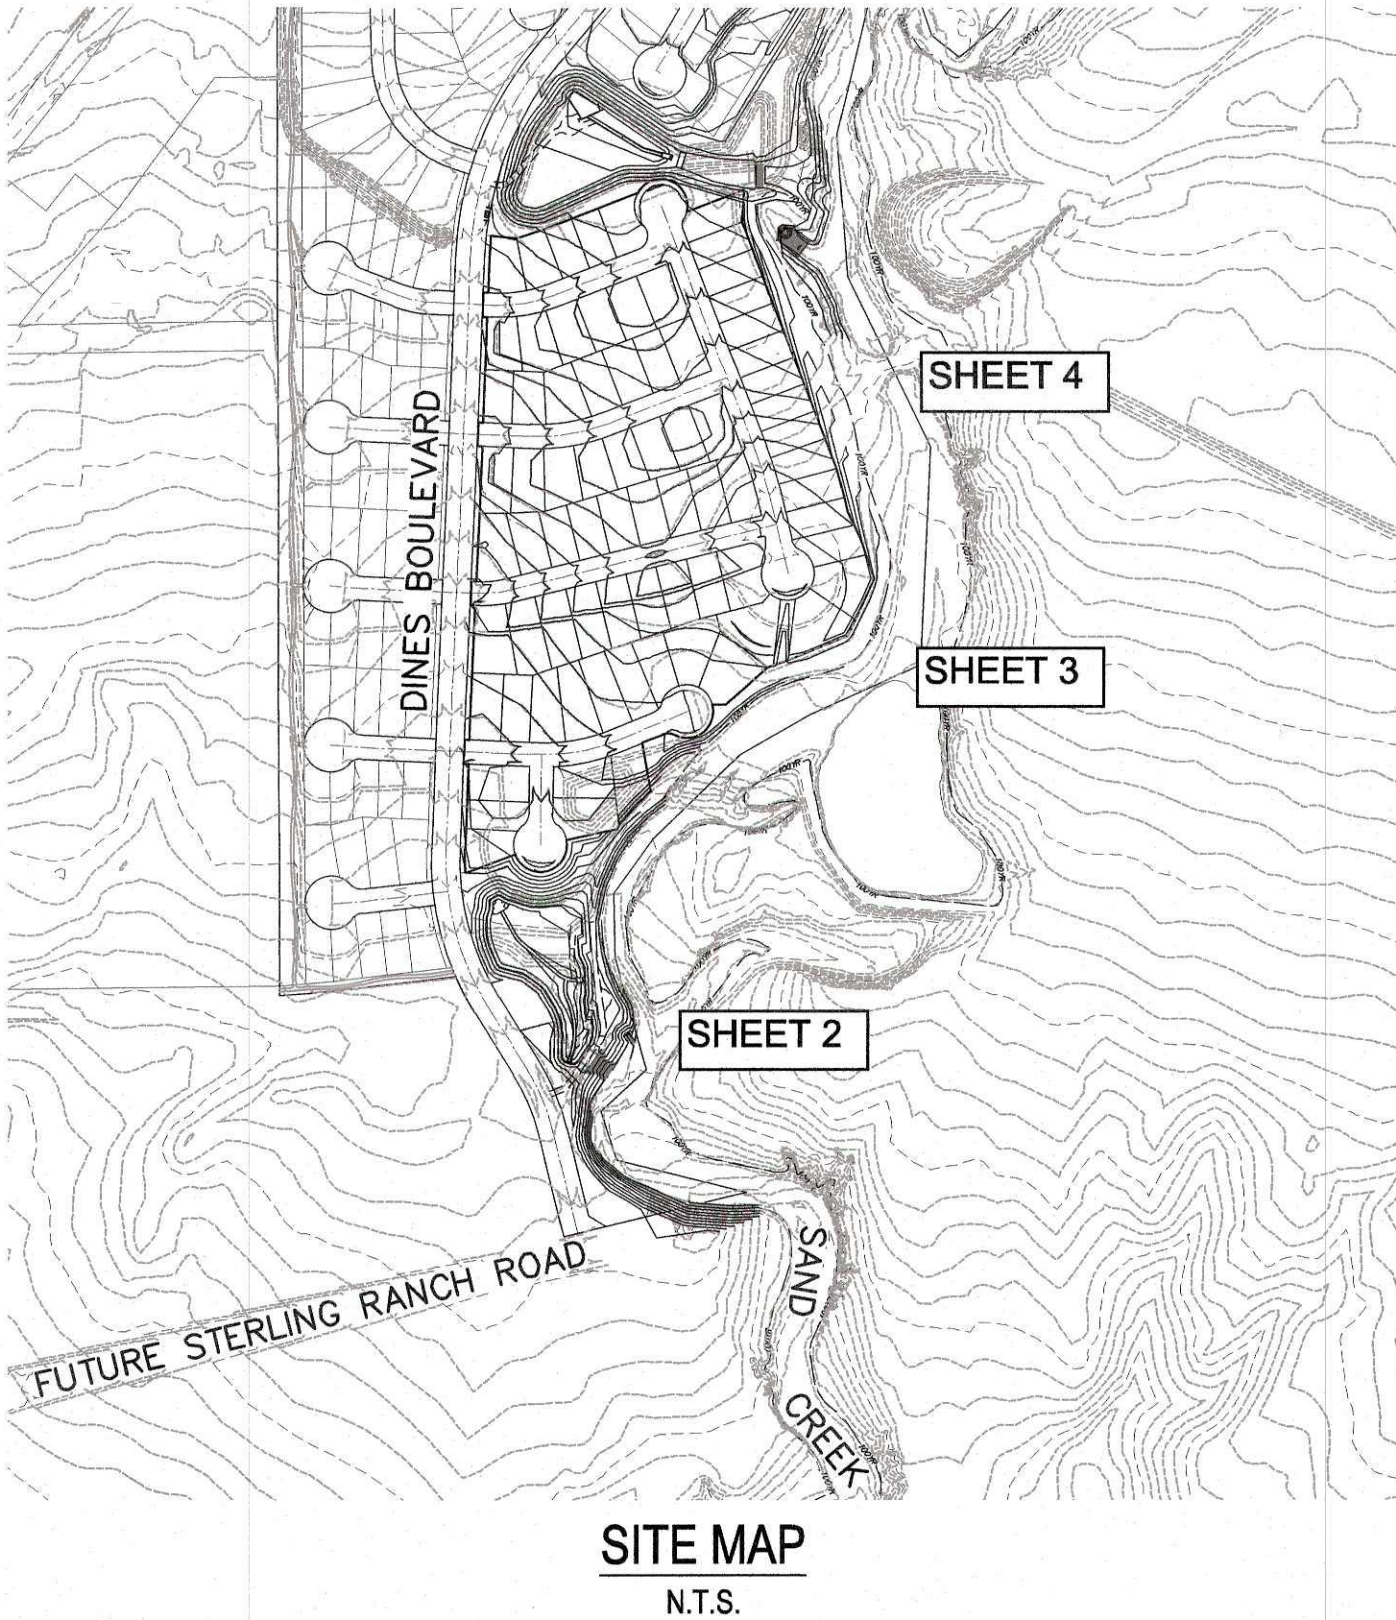

SITE MAP  
N.T.S.

FOR CONSTRUCTION BMP's AND SWMP REPORT; SEE GRADING AND EROSION CONTROL PLANS FOR BRANDING IRON FILING NO. 2 BY M&S CIVIL CONSULTANTS, INC.

AGENCIES

OWNER: SR LAND, LLC  
20 BOULDER CRESCENT, SUITE 201  
COLORADO SPRINGS, CO 80903  
JIM MORLEY (719) 471-1742

CIVIL ENGINEER: M & S CIVIL CONSULTANTS, INC.  
20 BOULDER CRESCENT, SUITE 110  
COLORADO SPRINGS, CO 80903  
VIRGIL A. SANCHEZ P.E. (719) 955-5485

ENGINEERING DIVISION: EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT  
2880 INTERNATIONAL CIRCLE, SUITE 110  
COLORADO SPRINGS, CO 80910  
JEFF RICE, P.E. (719) 520-6300

TRAFFIC ENGINEERING: EL PASO COUNTY DEPARTMENT OF PUBLIC WORKS  
3275 AKERS DRIVE  
COLORADO SPRINGS, CO 80922  
JENNIFER IRVINE, P.E. (719) 520-6460

WATER RESOURCES: STERLING RANCH METRO DISTRICT  
JDS-HYDRO CONSULTANTS  
545 E. PIKES PEAK AVE., SUITE 300  
COLORADO SPRINGS, CO 80903  
JOHN MCGINN (719) 668-8769

FIRE DISTRICT: BLACK FOREST FIRE PROTECTION DISTRICT  
11445 TEACOUT ROAD  
COLORADO SPRINGS, CO 80908  
CHIEF BRYAN JACK (719) 498-4300

GAS DEPARTMENT: COLORADO SPRINGS UTILITIES  
7710 DURANT DR.  
COLORADO SPRINGS, CO 80947  
TIM WENDT (719) 668-3556

ELECTRIC DEPARTMENT: MOUNTAIN VIEW ELECTRIC  
11140 E. WOODMEN ROAD  
FALCON, CO 80831  
(719) 495-2283

COMMUNICATIONS: QWEST COMMUNICATIONS  
(U.N.C.C. LOCATORS) (800) 922-1987  
AT&T (LOCATORS) (719) 635-3674

ENGINEER'S STATEMENT:

THIS GRADING AND EROSION CONTROL PLAN WAS PREPARED UNDER MY DIRECTION AND SUPERVISION AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. SAID PLAN HAS BEEN PREPARED ACCORDING TO THE CRITERIA ESTABLISHED BY THE COUNTY FOR GRADING AND EROSION CONTROL PLANS. I ACCEPT RESPONSIBILITY FOR ANY LIABILITY CAUSED BY NEGLIGENT ACTS, ERRORS OR OMISSIONS ON MY PART IN PREPARING THIS REPORT.

VIRGIL A. SANCHEZ, COLORADO P.E. NO. 37160 DATE  
FOR AND ON BEHALF OF M&S CIVIL CONSULTANTS, INC.

OWNER'S STATEMENT:

THE OWNER WILL COMPLY WITH THE REQUIREMENTS OF THE GRADING AND EROSION CONTROL PLAN.

JAMES F. MORLEY 3-31-2020  
SR LAND, LLC.  
20 BOULDER, SUITE 201  
COLORADO SPRINGS, CO 80903

EL PASO COUNTY:

COUNTY PLAN REVIEW IS PROVIDED ONLY FOR GENERAL CONFORMANCE WITH COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE FOR THE ACCURACY AND ADEQUACY OF THE DESIGN, DIMENSIONS, AND/OR ELEVATIONS WHICH SHALL BE CONFIRMED AT THE JOB SITE. THE COUNTY THROUGH THE APPROVAL OF THIS DOCUMENT ASSUMES NO RESPONSIBILITY FOR COMPLETENESS AND/OR ACCURACY OF THIS DOCUMENT.

FILED IN ACCORDANCE WITH THE REQUIREMENTS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE, DRAINAGE CRITERIA AND ENGINEERING CRITERIA MANUAL AS AMENDED.

JENNIFER IRVINE, P.E.  
COUNTY ENGINEER/ECM ADMINISTRATOR

SHEET INDEX

SHEET 1 TITLE SHEET  
SHEET 2 BANK STABILIZATION PLAN STA: 70+00 TO 81+00  
SHEET 3 BANK STABILIZATION PLAN STA: 81+00 TO 91+00  
SHEET 4 BANK STABILIZATION PLAN STA: 91+00 TO 98+00  
SHEET 5 SAND CREEK CHANNEL SECTIONS  
SHEET 6 SAND CREEK CHANNEL SECTIONS / GEC DETAILS  
SHEET 7 EROSION CONTROL DETAILS

EPC file no SF1918



BRANDING IRON AT SR FILING NO. 2

SAND CREEK BANK STABILIZATION PLANS

PROJECT NO. 09-012  
SCALE: HORIZONTAL: N/A  
VERTICAL: N/A  
DESIGNED BY: ELY  
DRAWN BY: VAS  
CHECKED BY: VAS

DATE: 02/07/2020  
SHEET 1 OF 7  
CR01

102 E. PIKES PEAK AVE., 5TH FLOOR  
COLORADO SPRINGS, CO 80903  
PHONE: 719.955.5485

M&S CIVIL CONSULTANTS, INC.

FOR AND ON BEHALF OF M&S CIVIL CONSULTANTS, INC.

REVISIONS:

NO. DATE DESCRIPTION

THE ENGINEER PREPARING THESE PLANS WILL NOT BE RESPONSIBLE OR LIABLE FOR UNAUTHORIZED CHANGES TO OR USES OF THESE PLANS. ALL CHANGES TO THE PLANS MUST BE IN WRITING AND MUST BE APPROVED BY THE PREPAREE OF THESE PLANS.


CAUTION







File: 0:\00002A\sterling ranch district\eng\corral\bank stabilization\branding iron 2 bank plans\CR03.dwg Plotstamp: 2/7/2020 2:16 PM

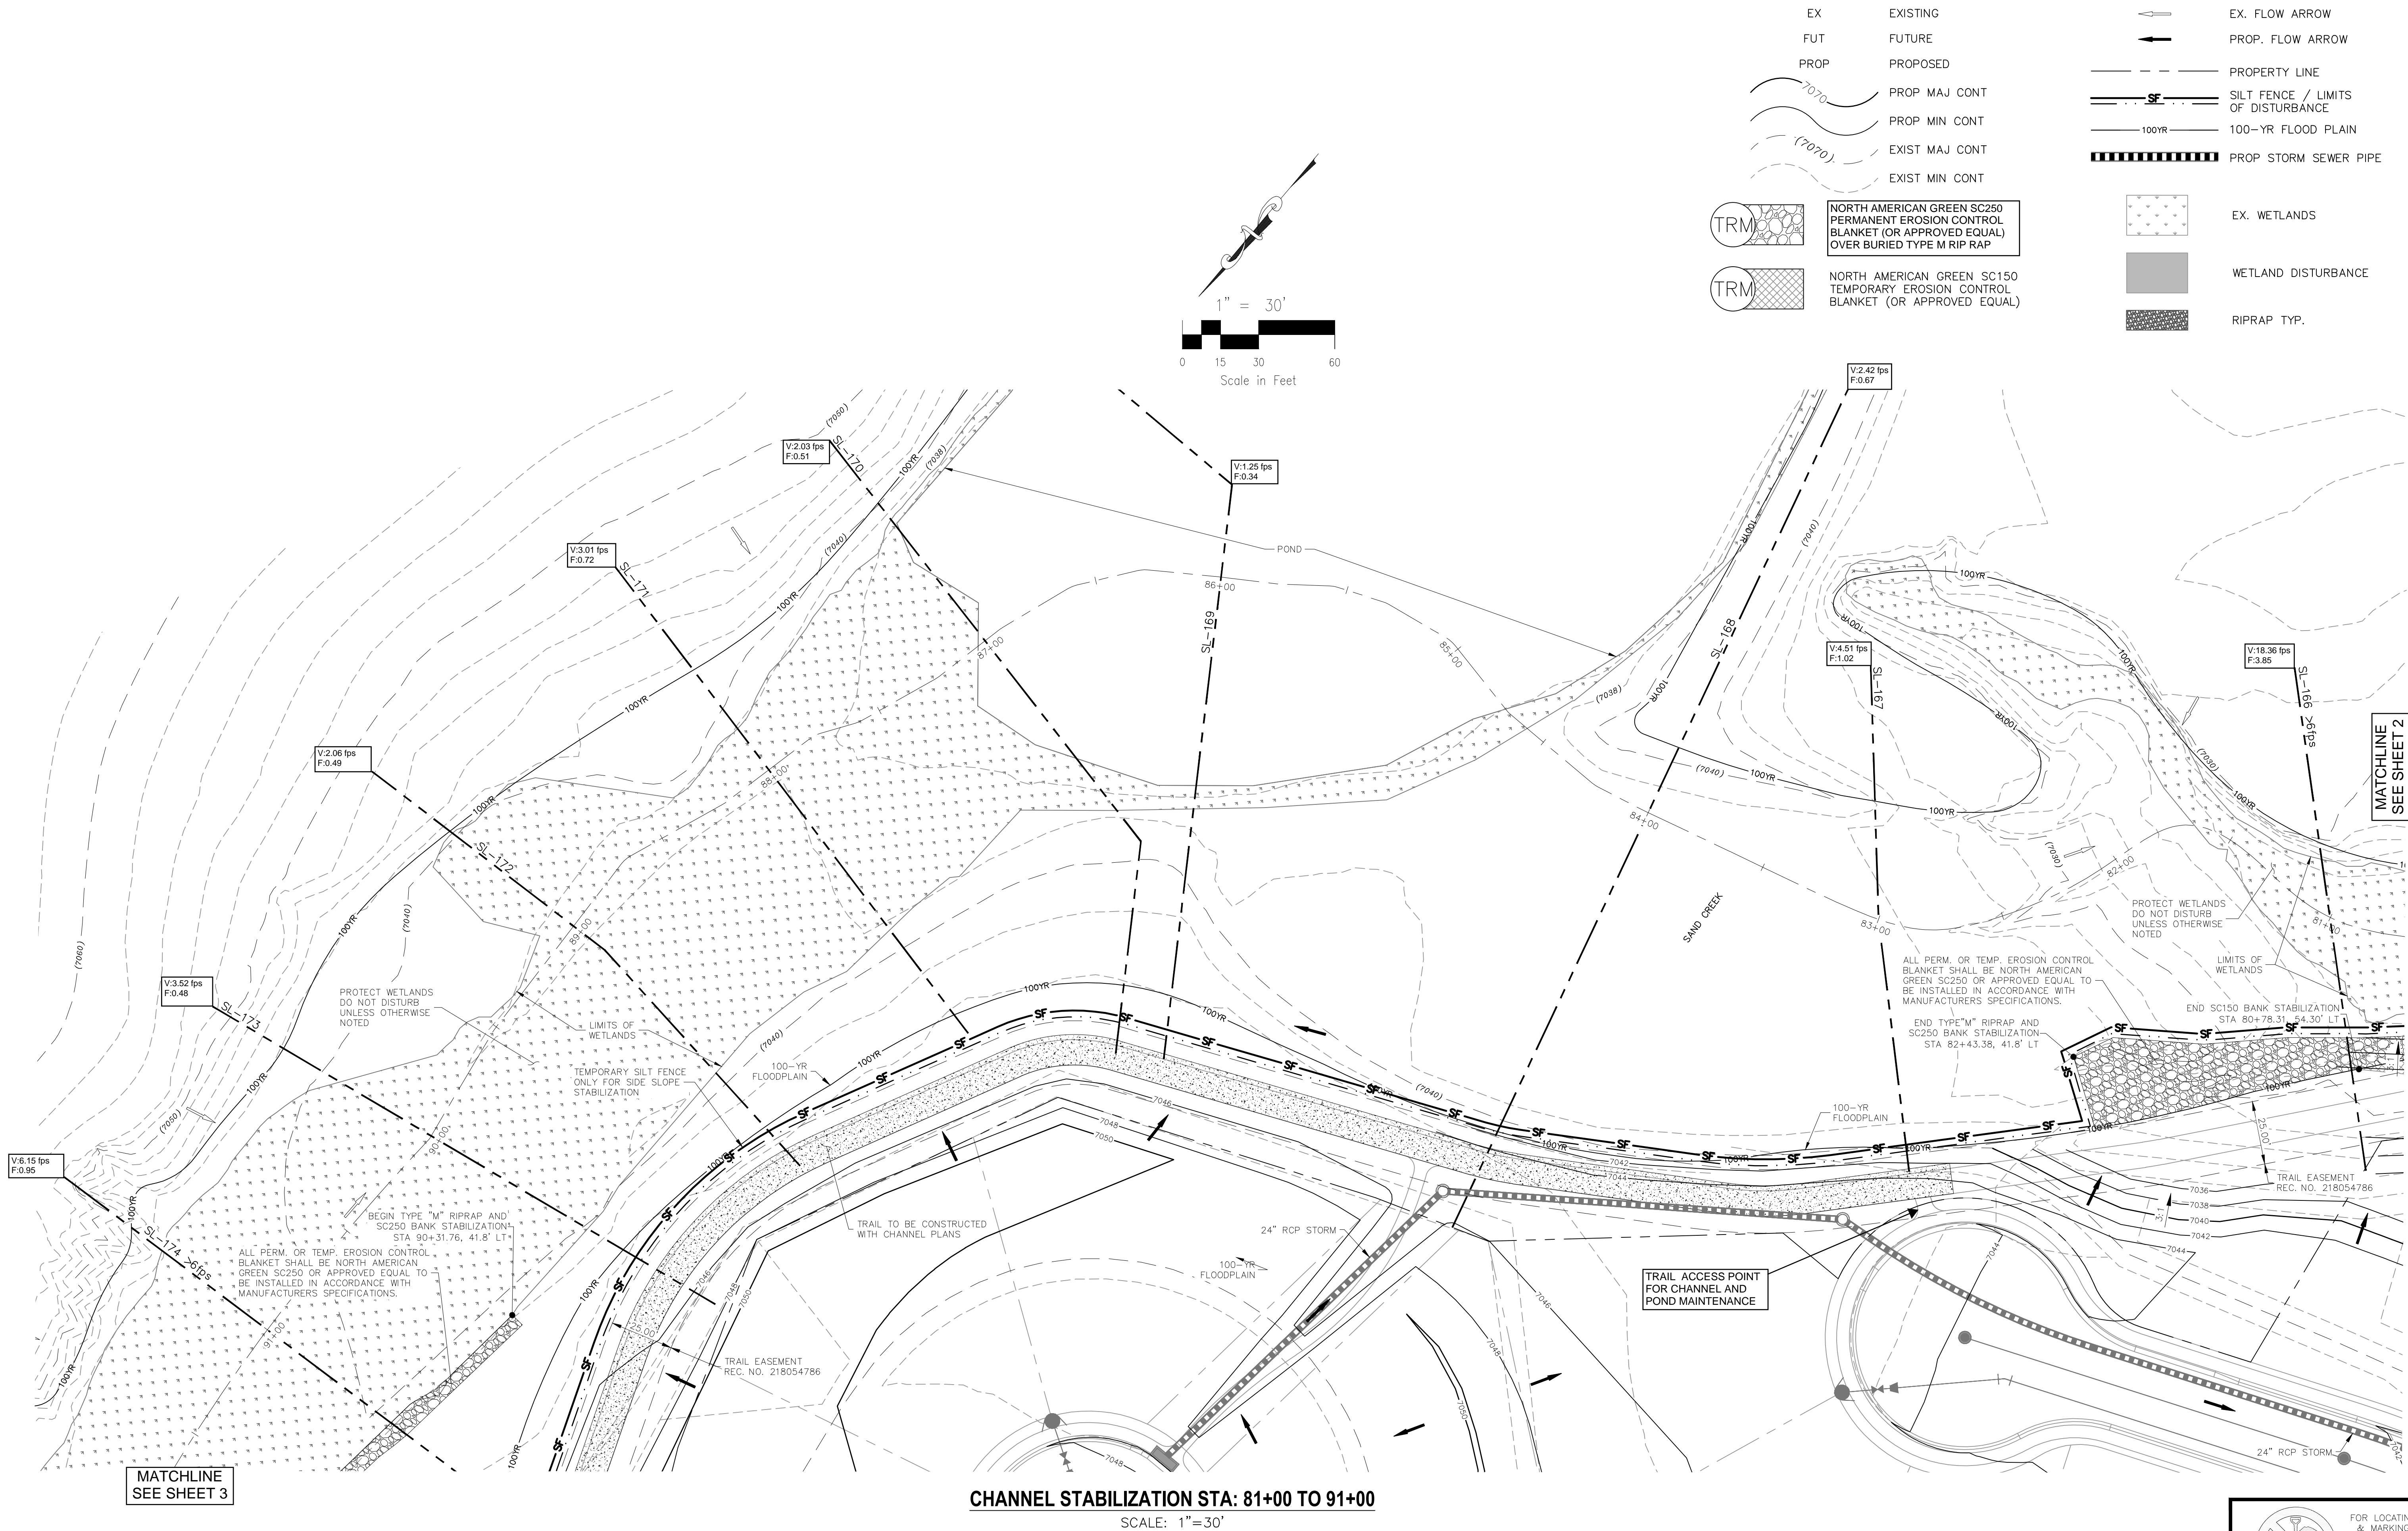

EX  
FUT  
PROP

EXISTING  
FUTURE  
PROPOSED

7070

7070

7070

7070

TRM

TRM

NORTH AMERICAN GREEN SC250  
PERMANENT EROSION CONTROL  
BLANKET (OR APPROVED EQUAL)  
OVER BURIED TYPE M RIP RAP

NORTH AMERICAN GREEN SC150  
TEMPORARY EROSION CONTROL  
BLANKET (OR APPROVED EQUAL)

EX. FLOW ARROW

PROP. FLOW ARROW

PROPERTY LINE

SILT FENCE / LIMITS  
OF DISTURBANCE

100-YR FLOOD PLAIN

PROP STORM SEWER PIPE

EX. WETLANDS

WETLAND DISTURBANCE

RIPRAP TYP.

FOR LOCATING  
& MARKING  
GAS,  
ELECTRIC,  
WATER &  
TELEPHONE  
LINES

FOR BURIED UTILITY INFORMATION  
48 HRS BEFORE YOU DIG  
CALL 1-800-922-1987

EPC 6/23/2020

BRANDING IRON AT SR FILING NO. 2

SAND CREEK BANK STABILIZATION PLANS

PROJECT NO. 09-012  
DESIGNED BY: VAS  
DRAWN BY: ELY  
CHECKED BY: VAS

DATE: 02/07/2020  
SCALE: HORIZONTAL: N/A  
VERTICAL: N/A

SHEET 3 OF 7  
GR03

102 E. PIKE PEAK AVE., 5TH FLOOR  
COLORADO SPRINGS, CO 80903  
PHONE: 719.555.5485

MA&S

CIVIL CONSULTANTS, INC.

FOR AND ON  
BEHALF OF  
M&S CIVIL  
CONSULTANTS,  
INC.

REGISTERED  
PROFESSIONAL  
ENGINEER  
NO. 37160  
STATE OF COLORADO

REVISIONS:

NO.	DATE:	BY:	DESCRIPTION:


APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

THE ENGINEER PREPARING THESE PLANS WILL NOT BE RESPONSIBLE, OR LIABLE, FOR UNAUTHORIZED CHANGES TO OR  
USES OF THESE PLANS. ALL CHANGES TO THE PLANS MUST BE IN WRITING AND MUST BE APPROVED BY THE PREPARER  
OF THESE PLANS.

CAUTION



O:\09002A\Sterling Ranch District\dwg\Const Dwg\Grading & Erosion Control\Bank Stabilization\Branding Iron 2 bank plans\GR04.dwg PldStamp: 5/6/2020 4:09 PM










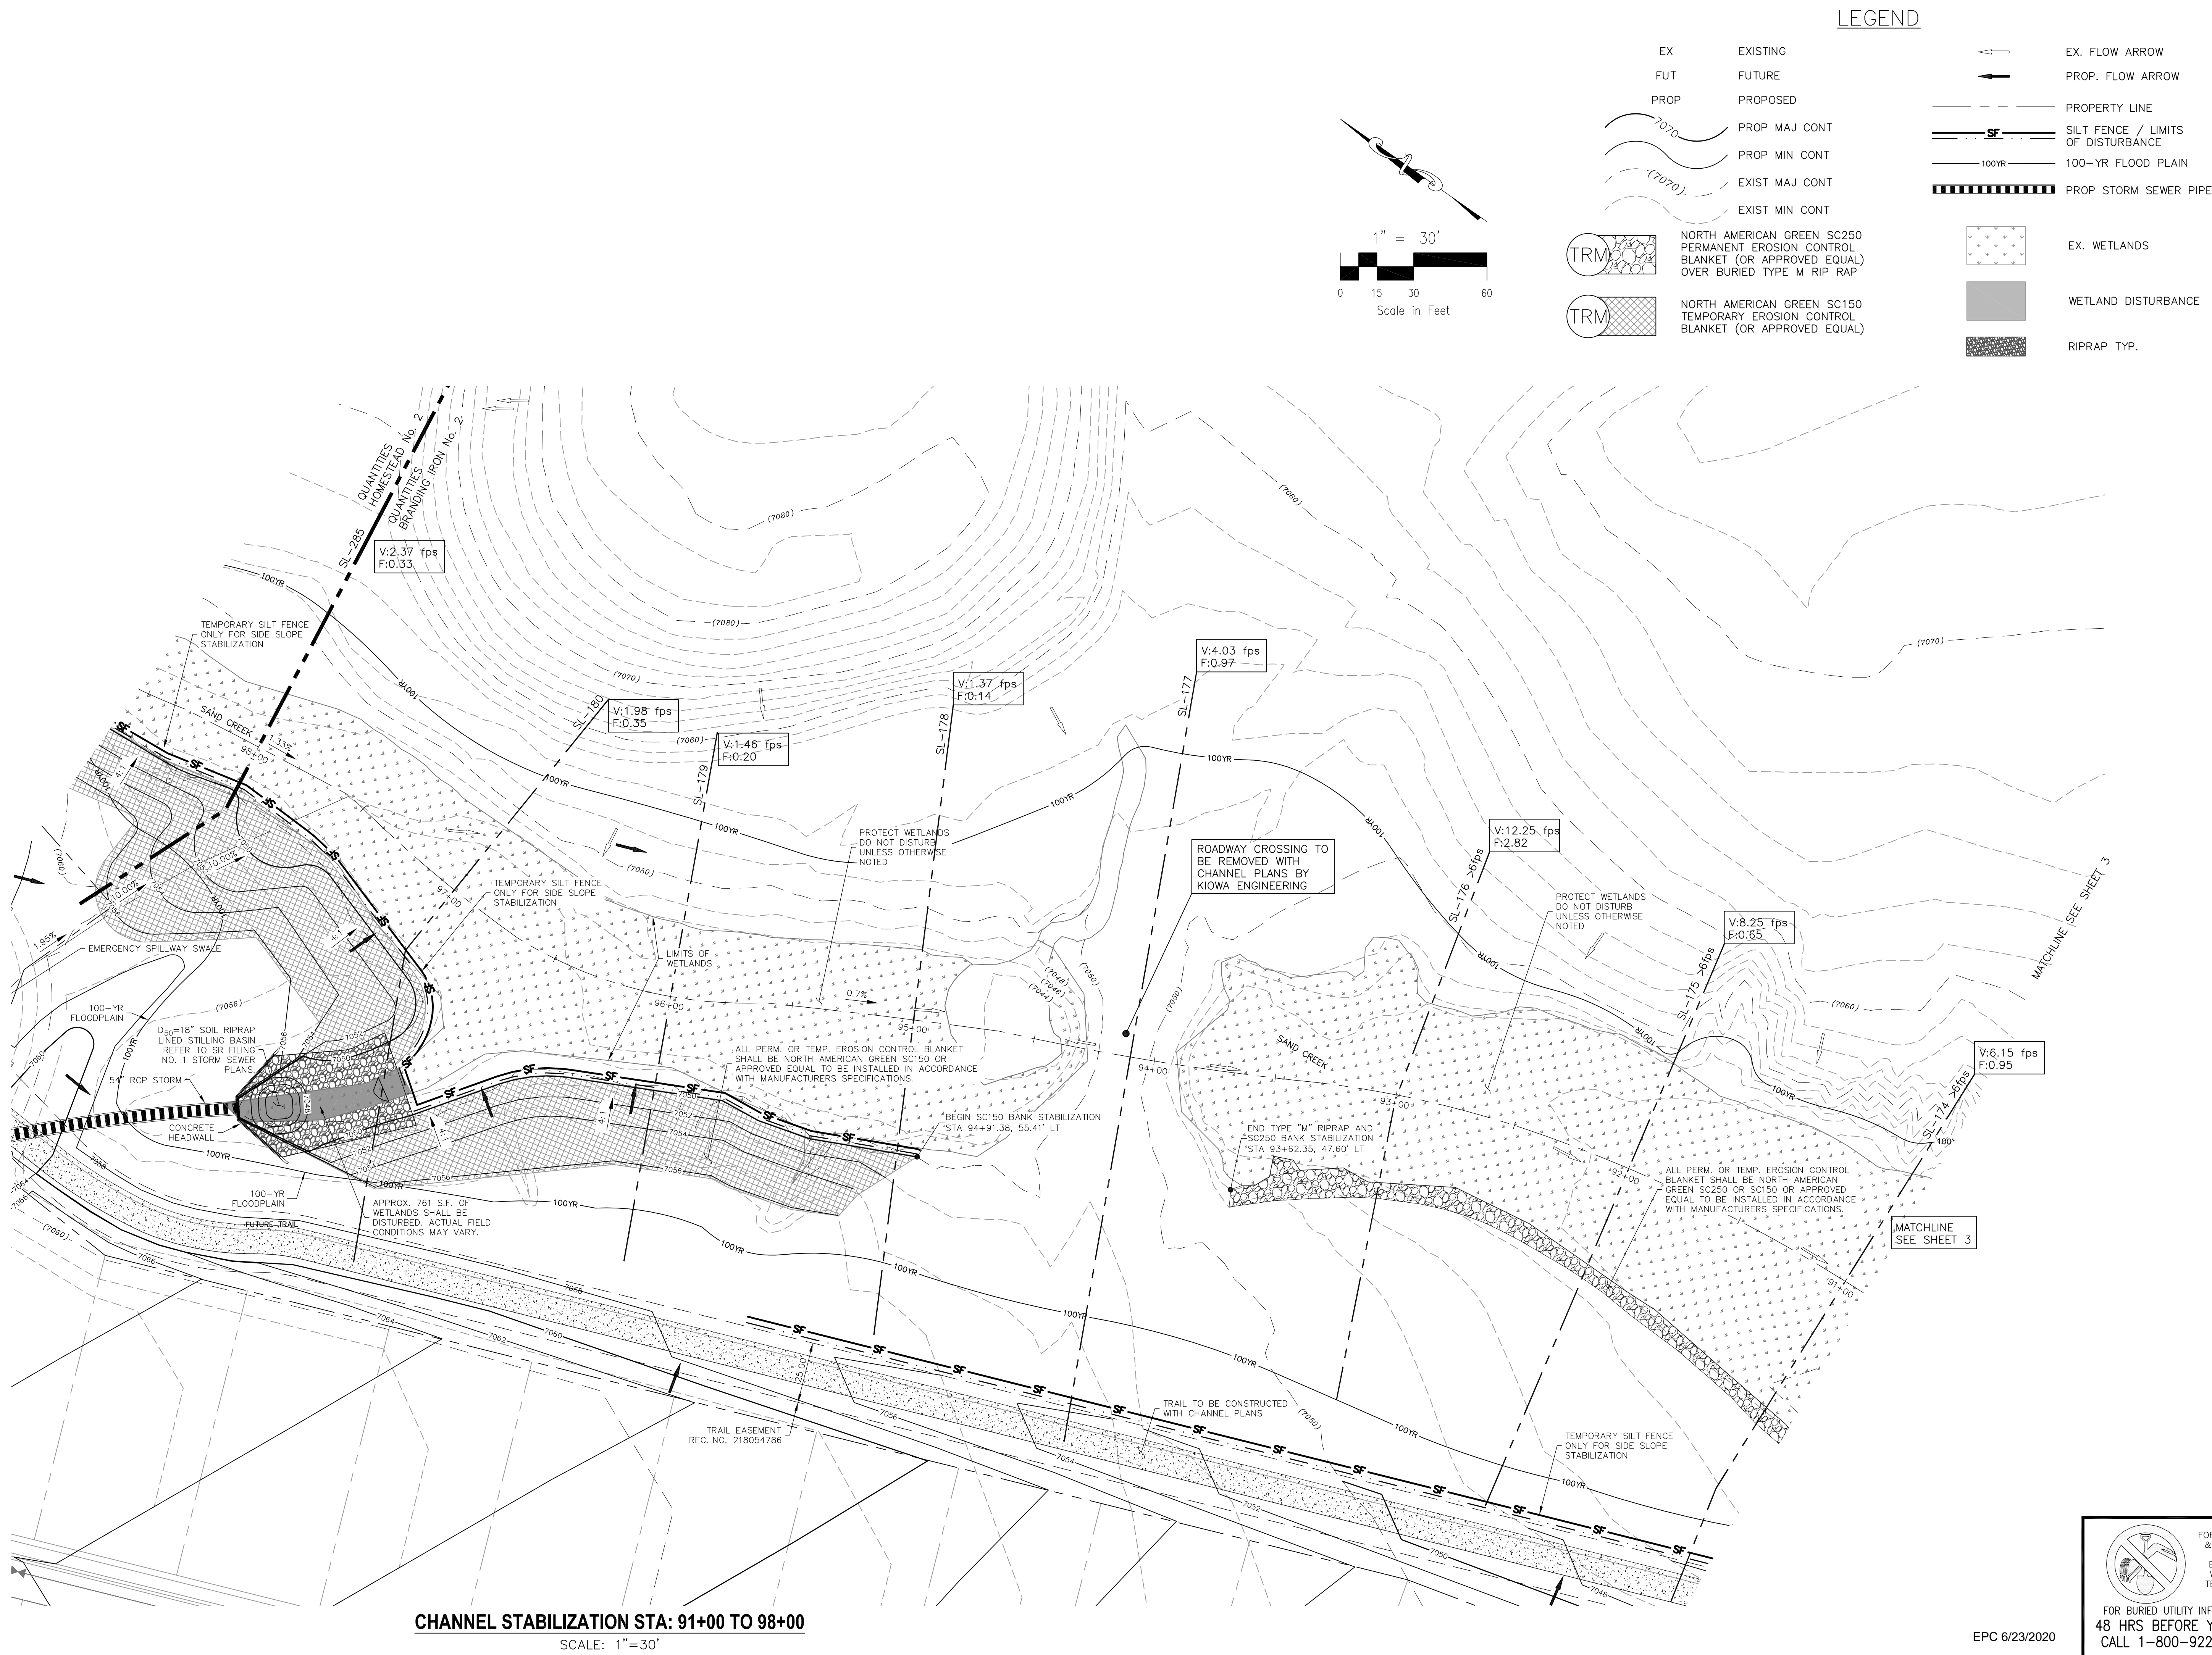


EPC 6/23/2020

FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES  
FOR BURIED UTILITY INFORMATION  
48 HRS BEFORE YOU DIG  
CALL 1-800-922-1987

BRANDING IRON AT SR FILING NO. 2		SAND CREEK BANK STABILIZATION PLANS	
PROJECT NO. 09-012	DESIGNED BY: VAS	SCALE: HORIZONTAL: N/A	DATE: 05/06/2020
DRAWN BY: ELY	CHECKED BY: VAS	VERTICAL: N/A	SHEET 4 OF 7
FOR AND ON BEHALF OF M&S CIVIL CONSULTANTS, INC.		VIRGIL A. SANCHEZ, COLORADO P.E. NO. 37160	
102 E. Pikes Peak Ave., 5th Floor Colorado Springs, CO 80903 PHONE: 719.555.5485		M&S CIVIL CONSULTANTS, INC.	
REVISIONS:		CAUTION	



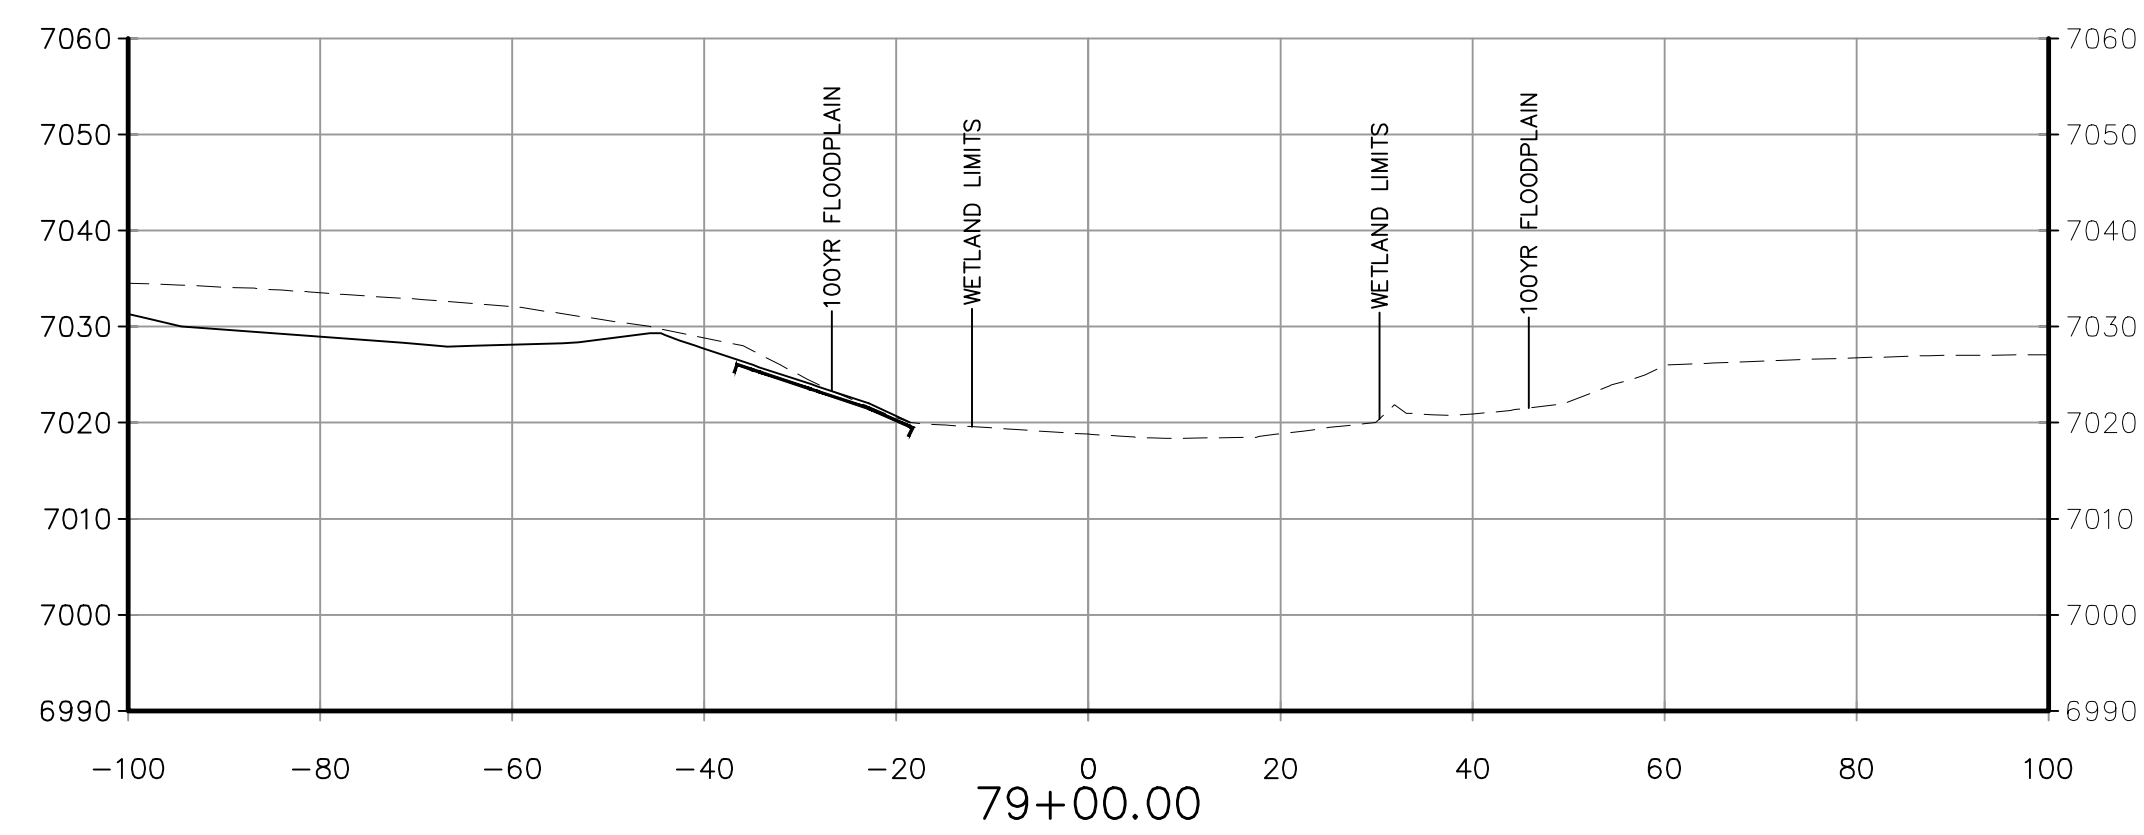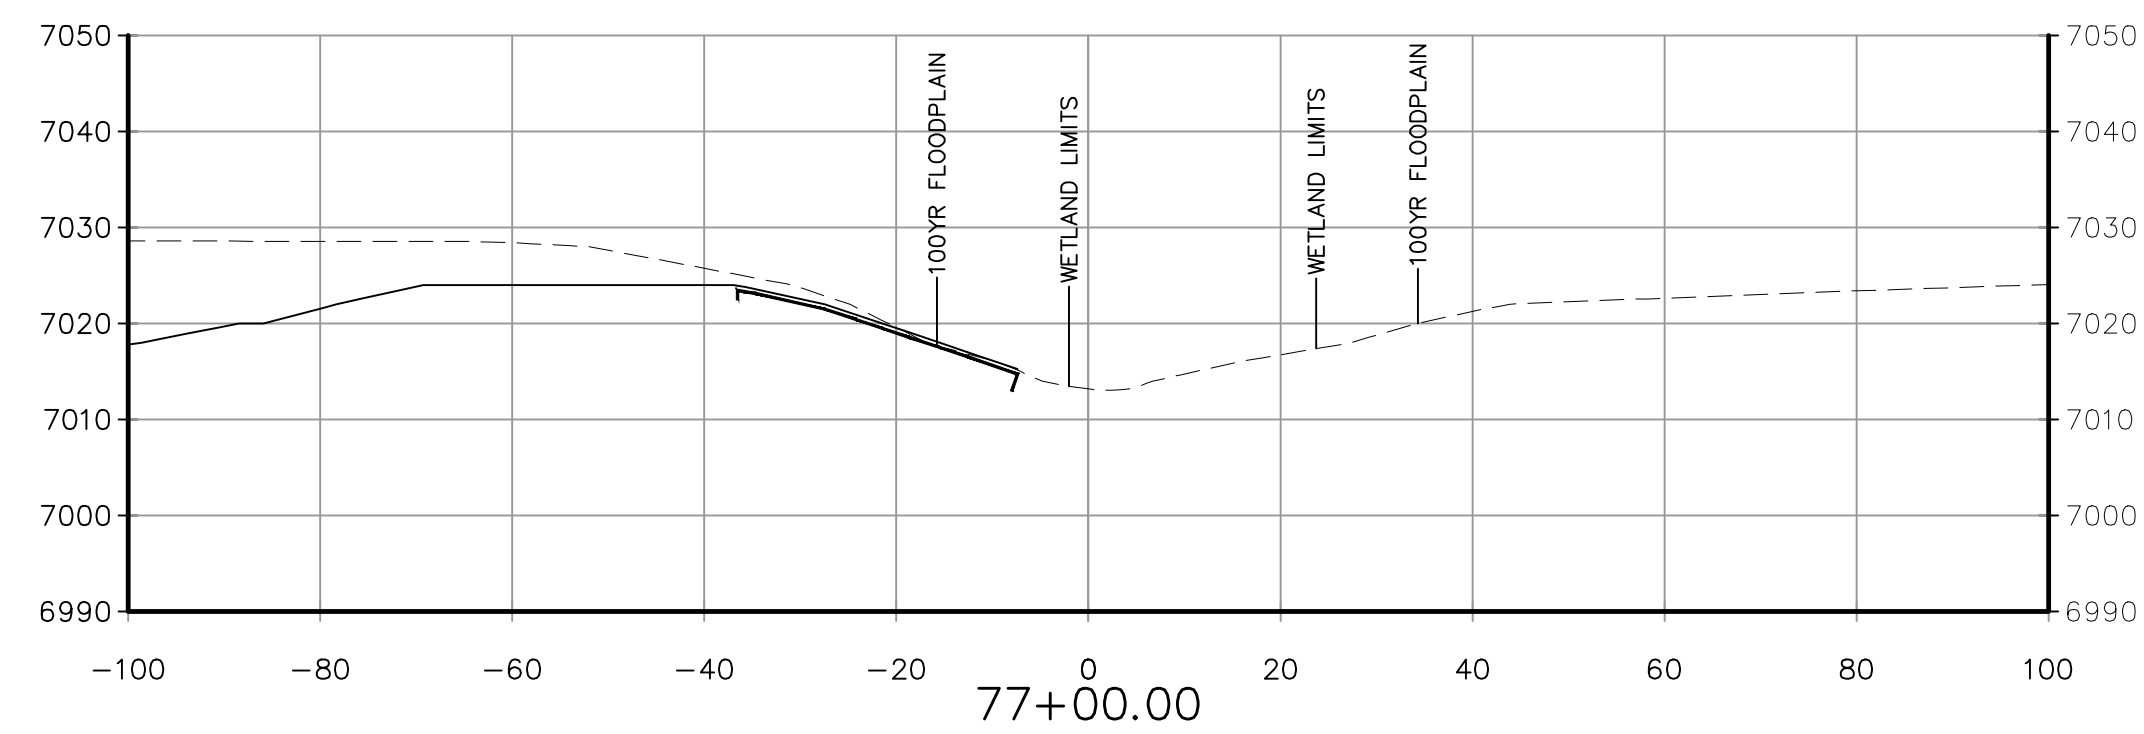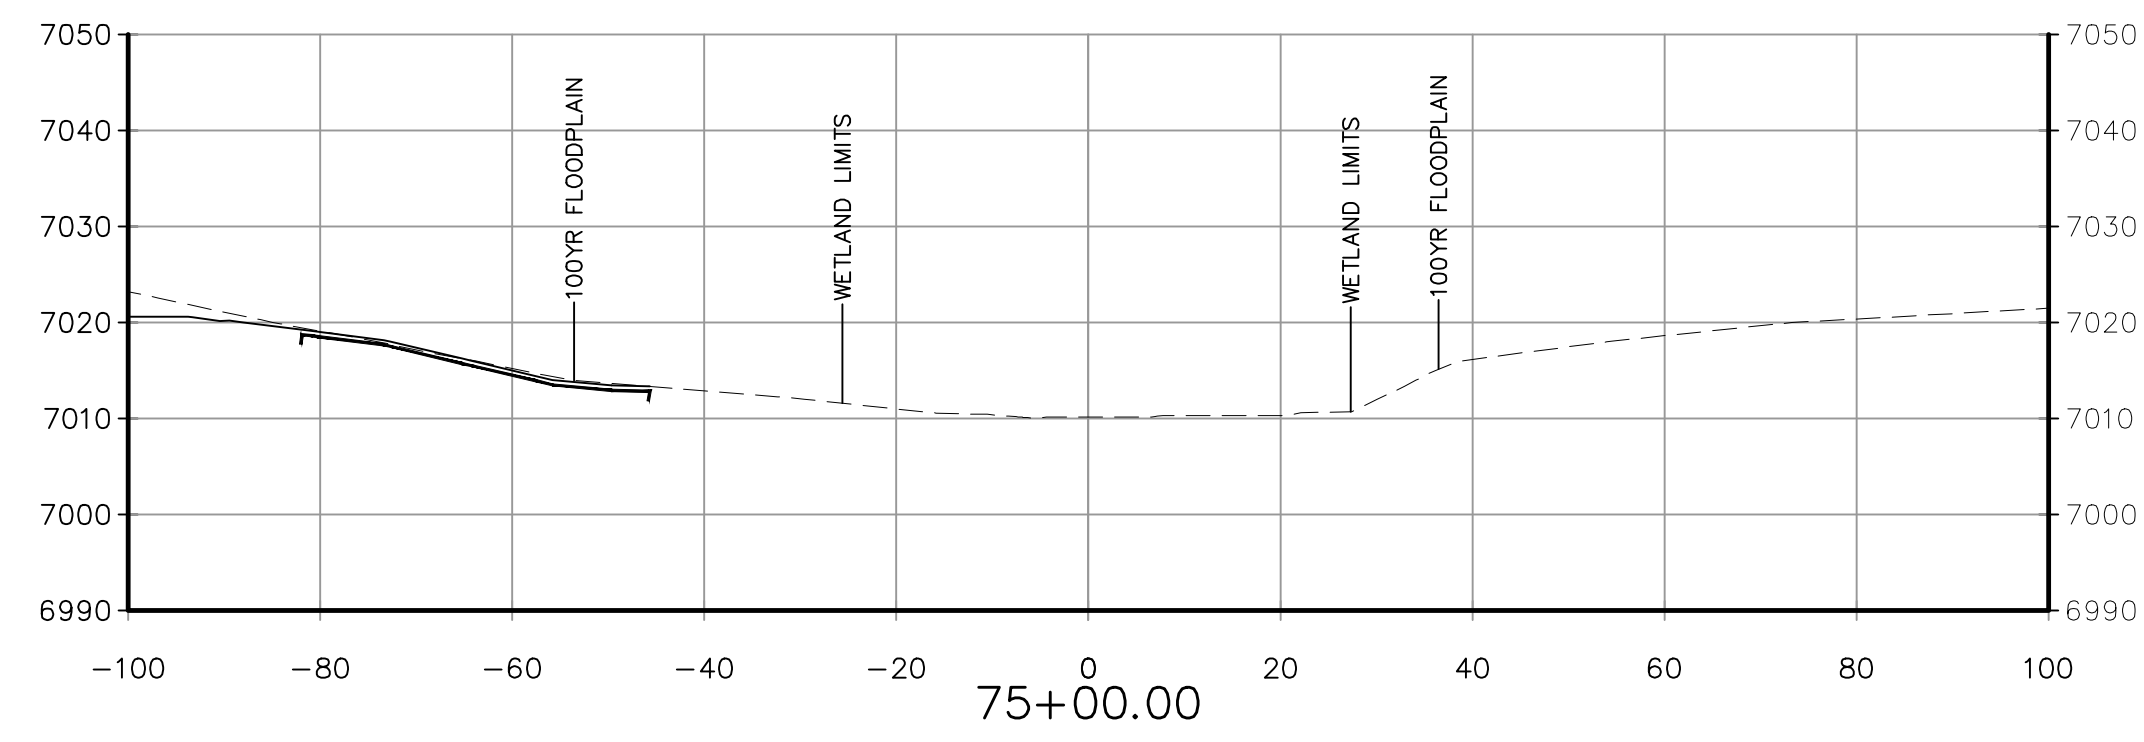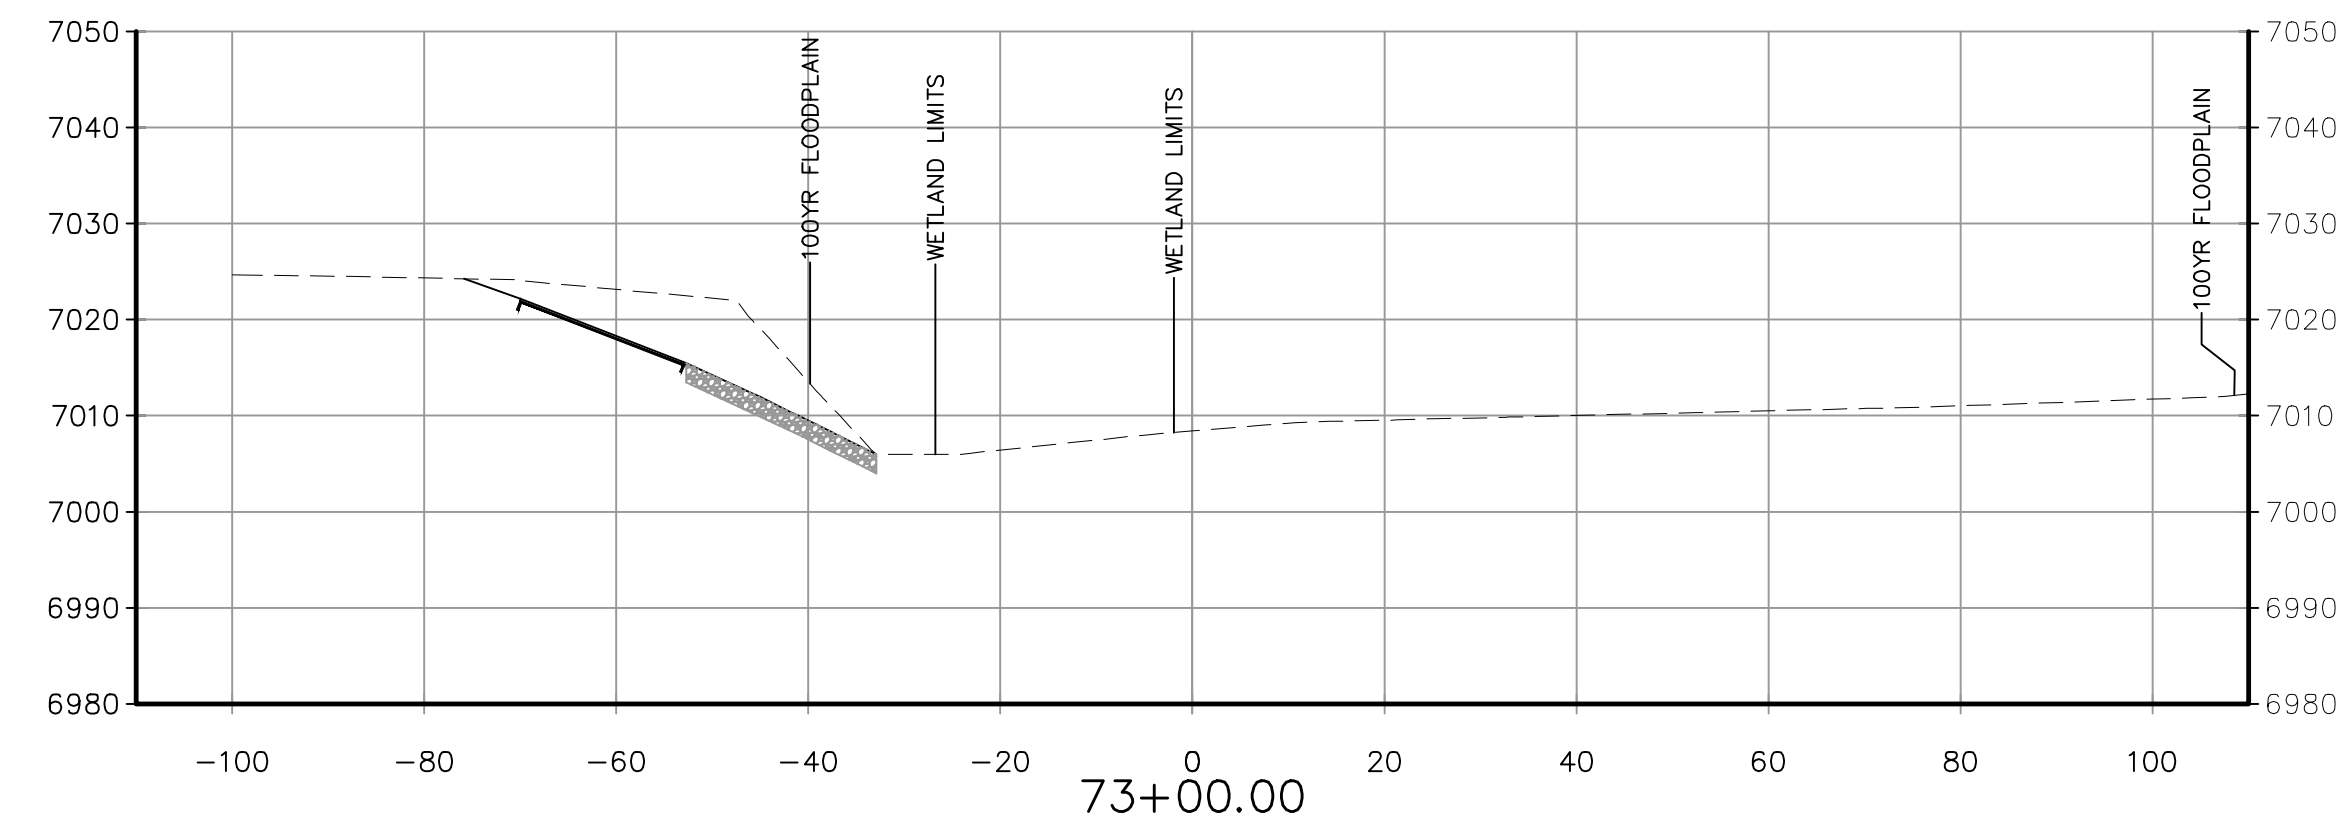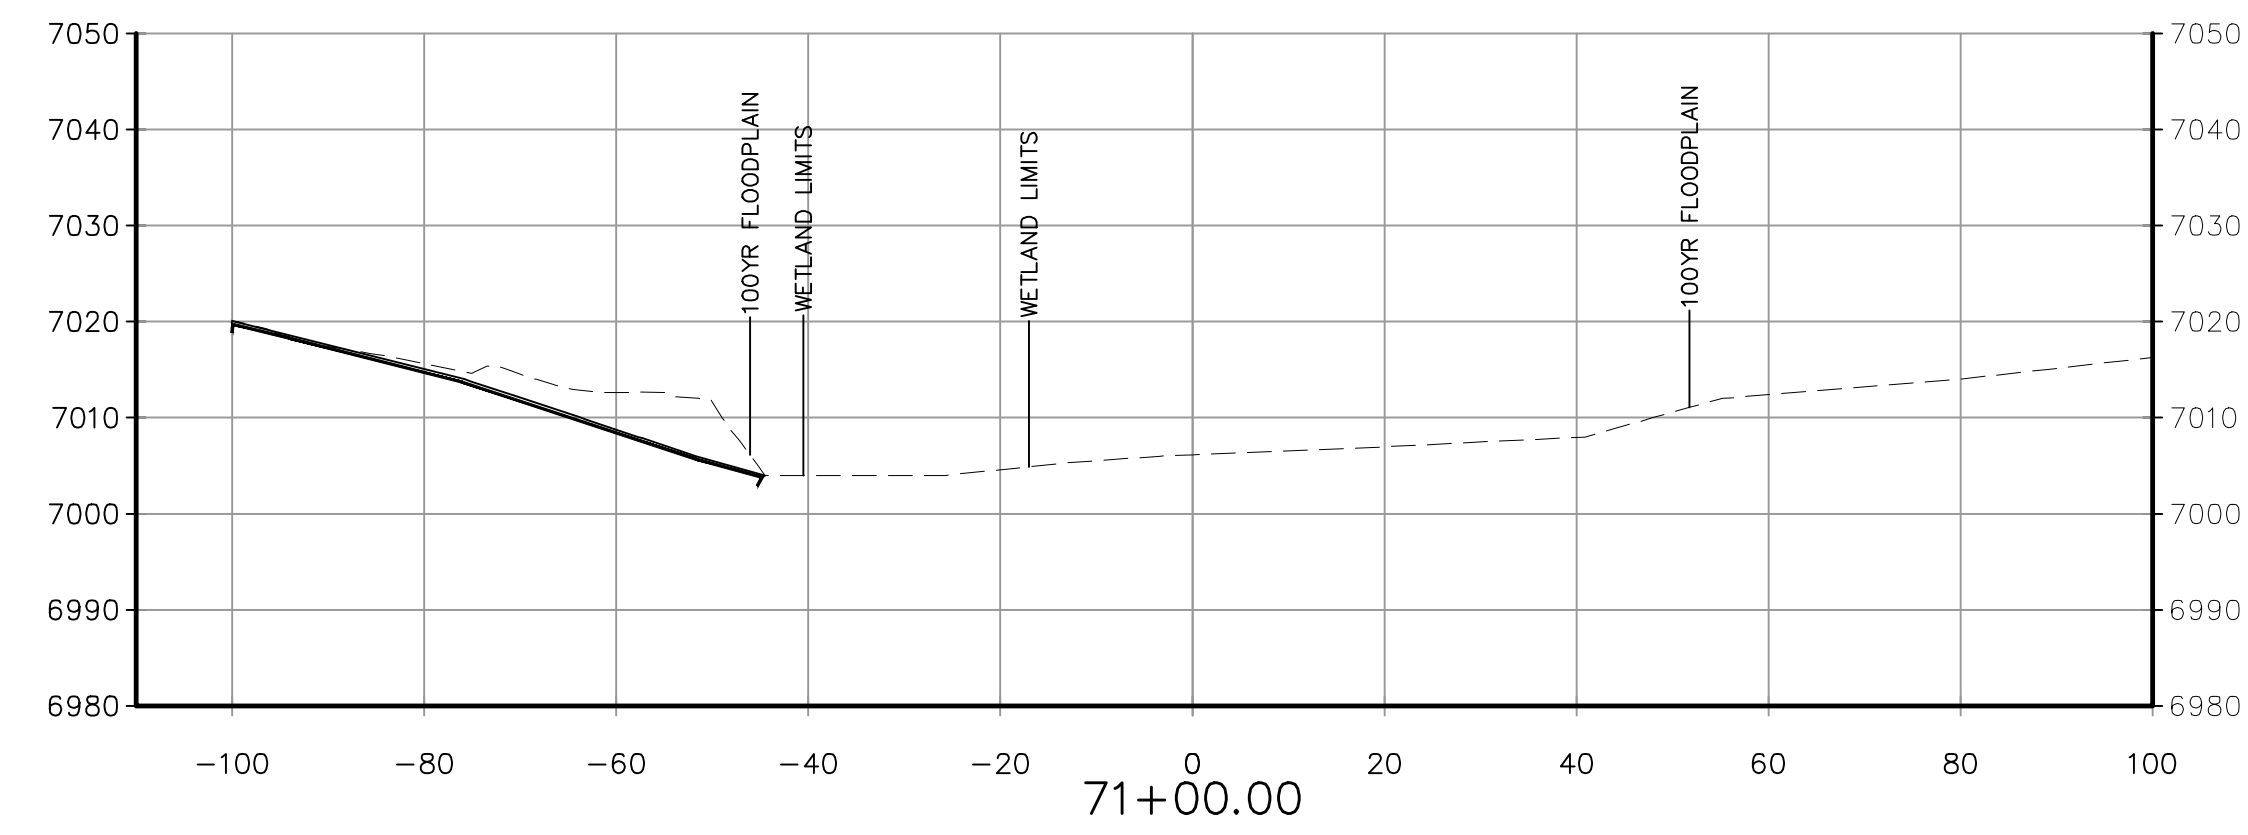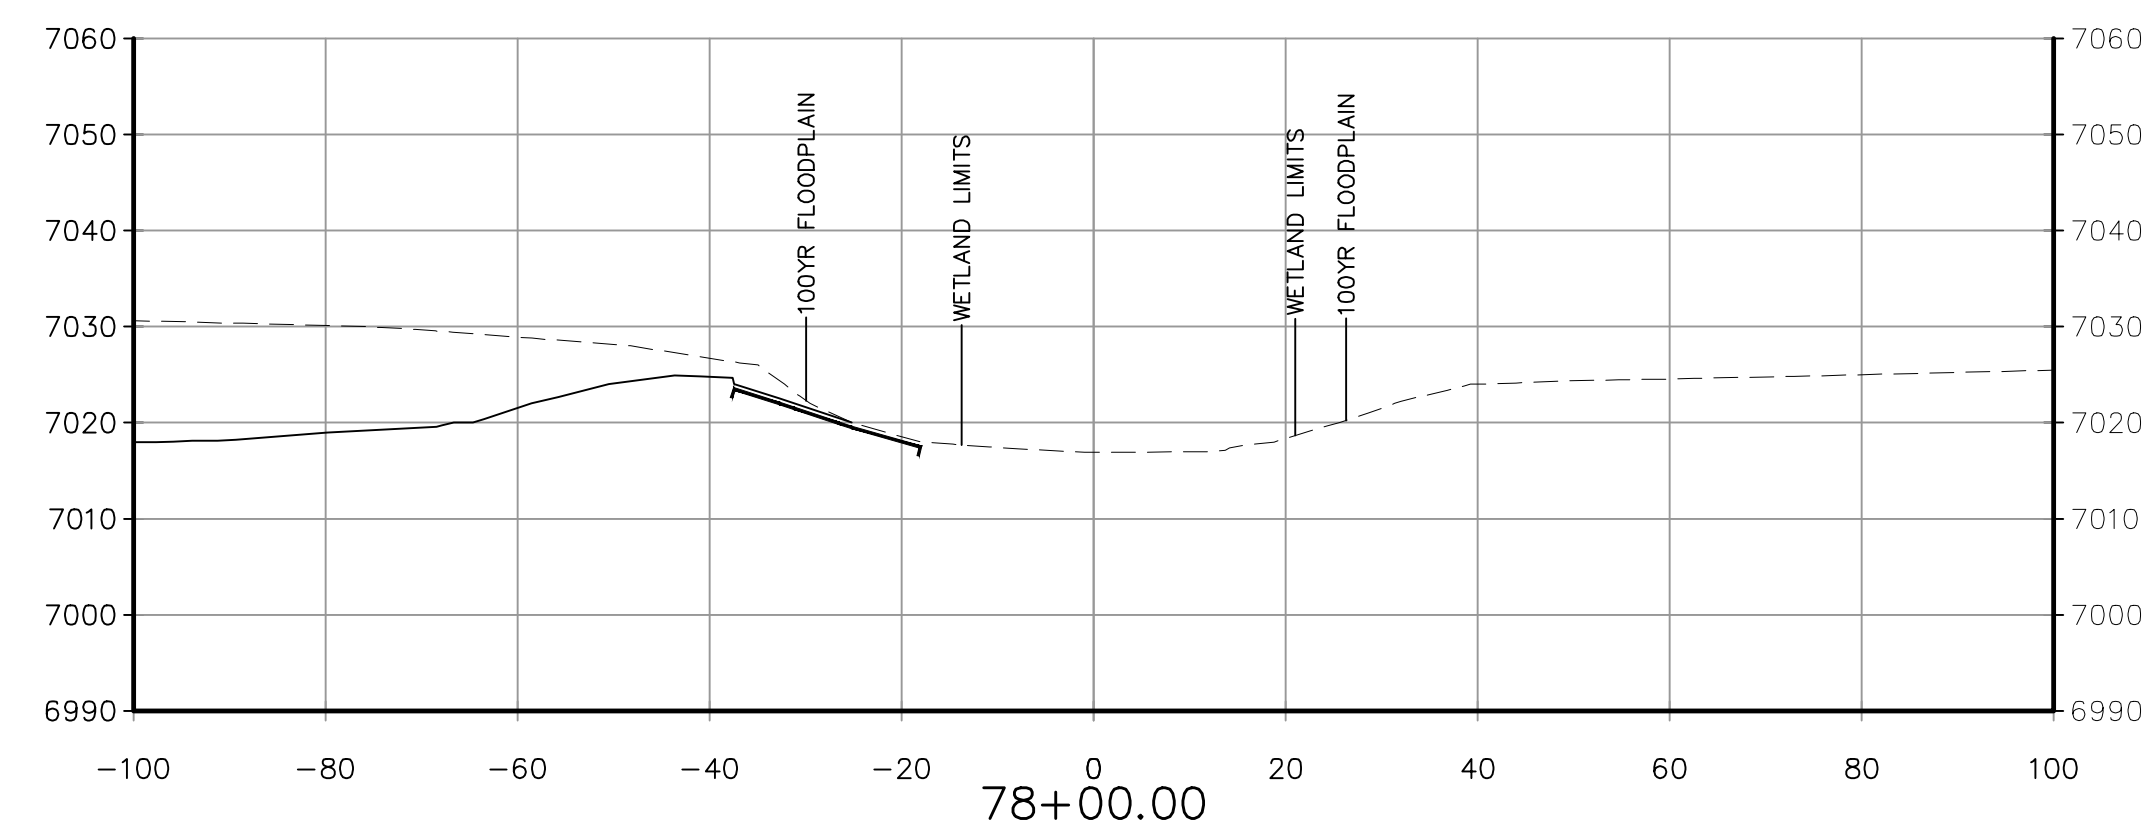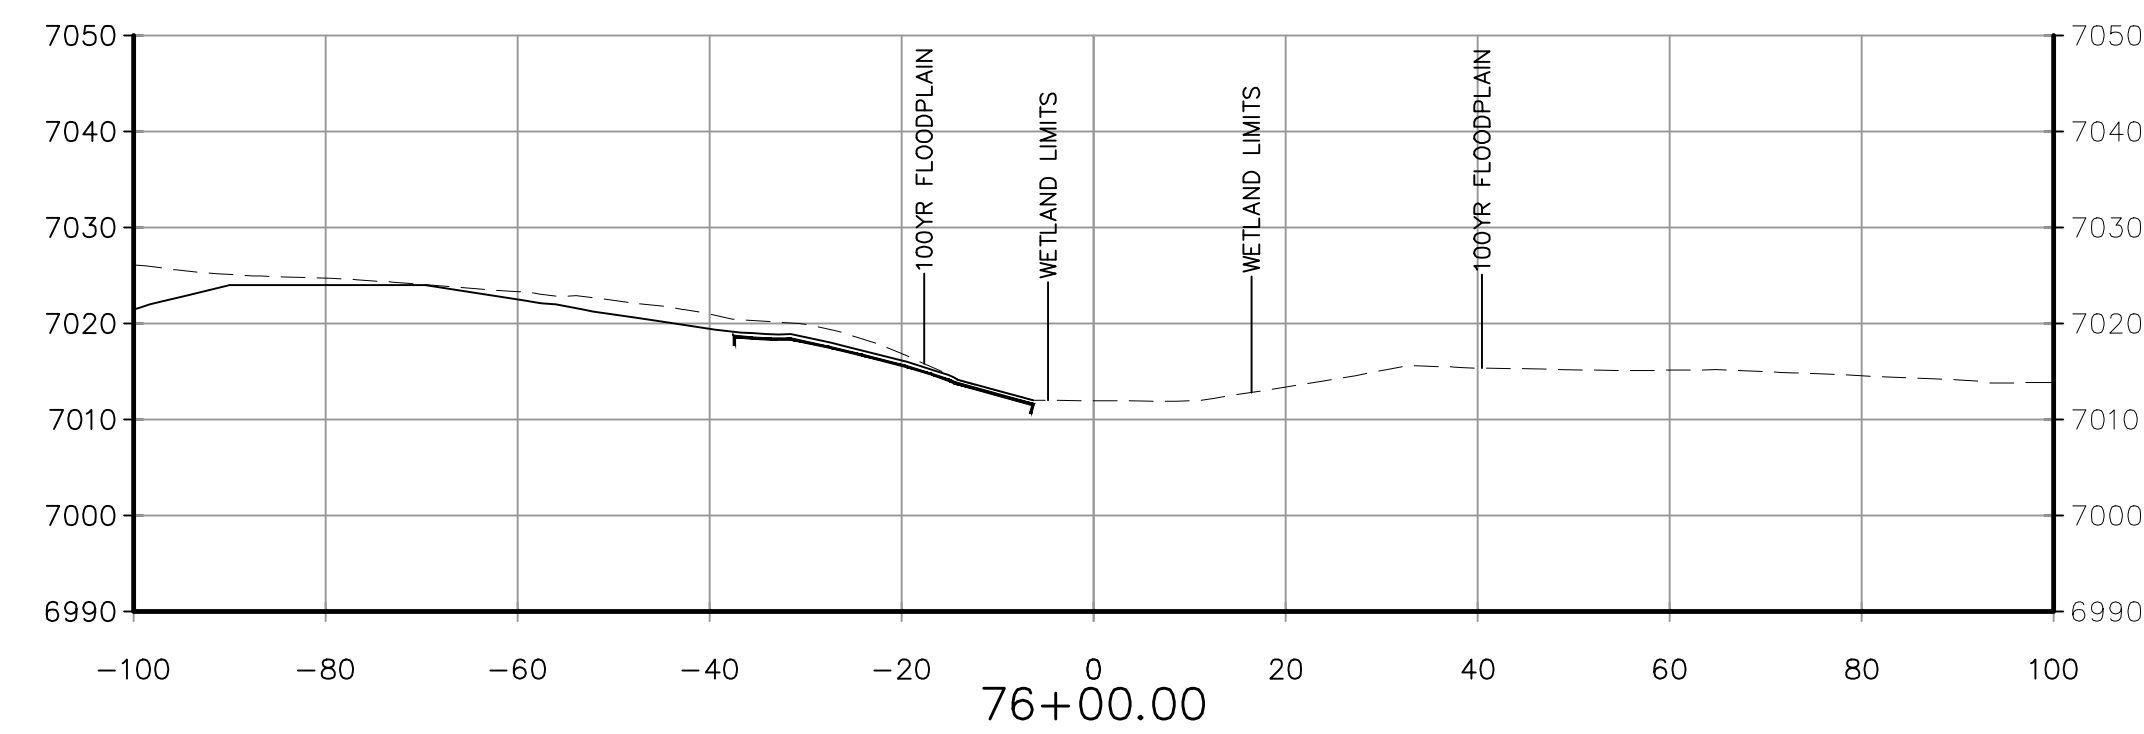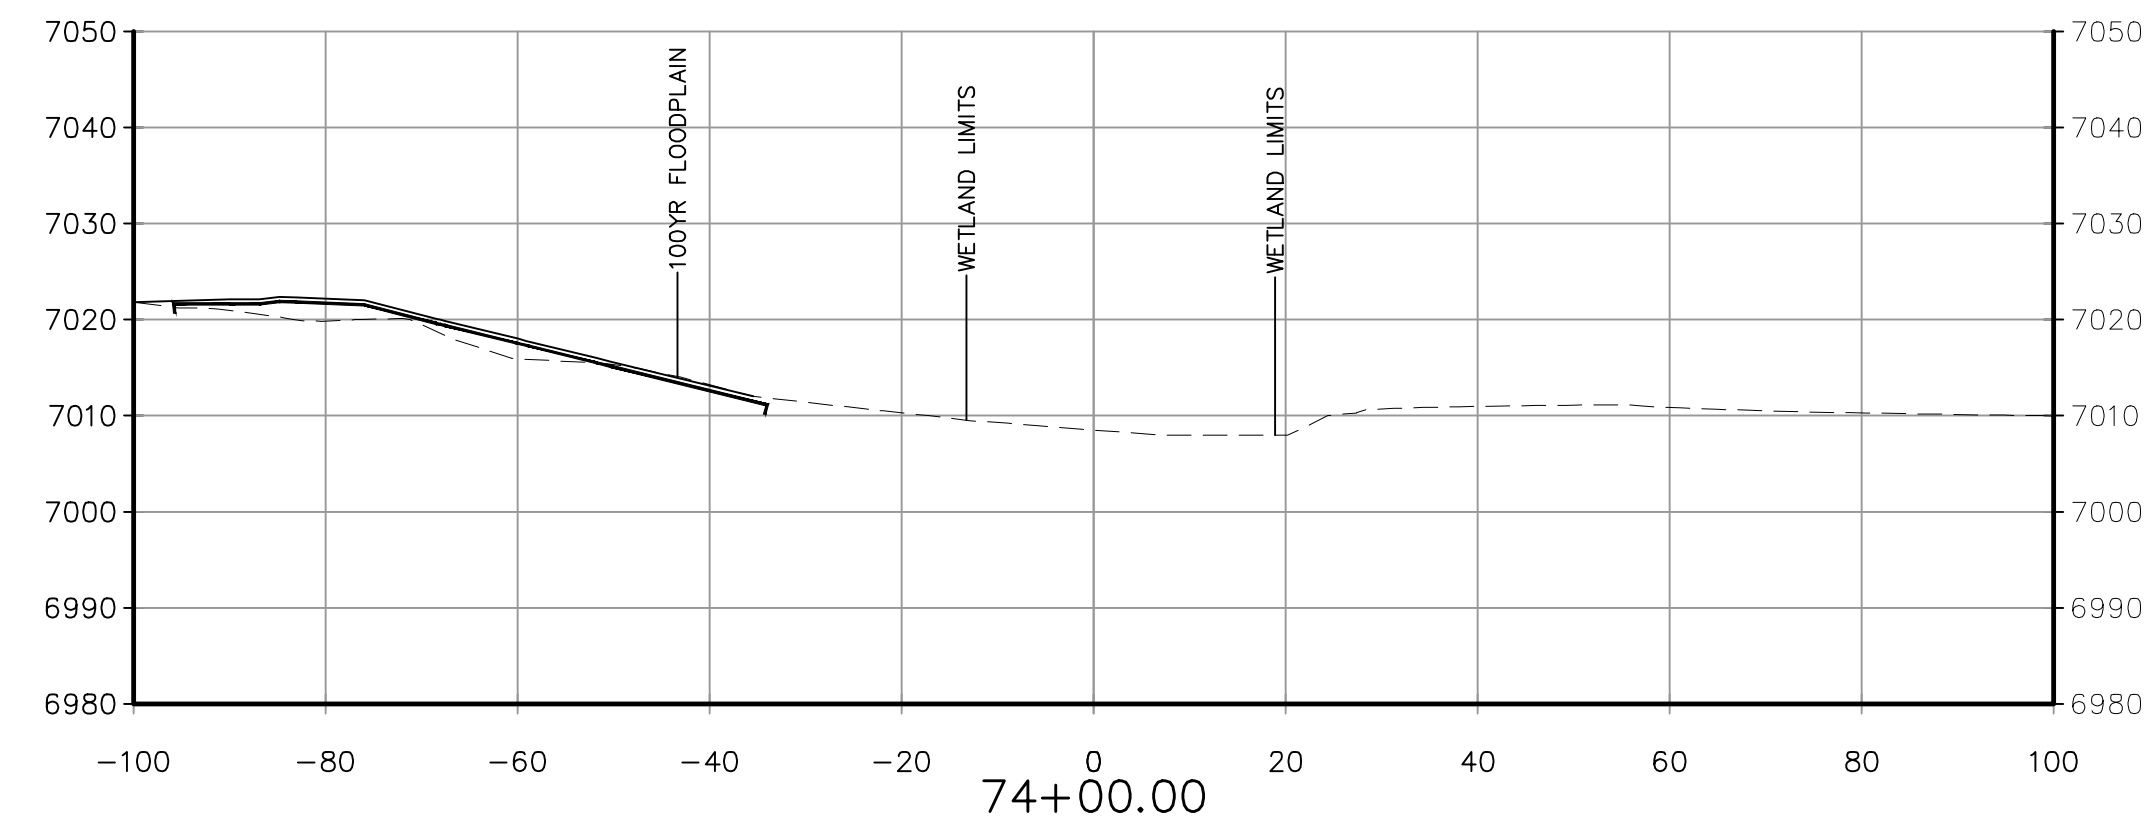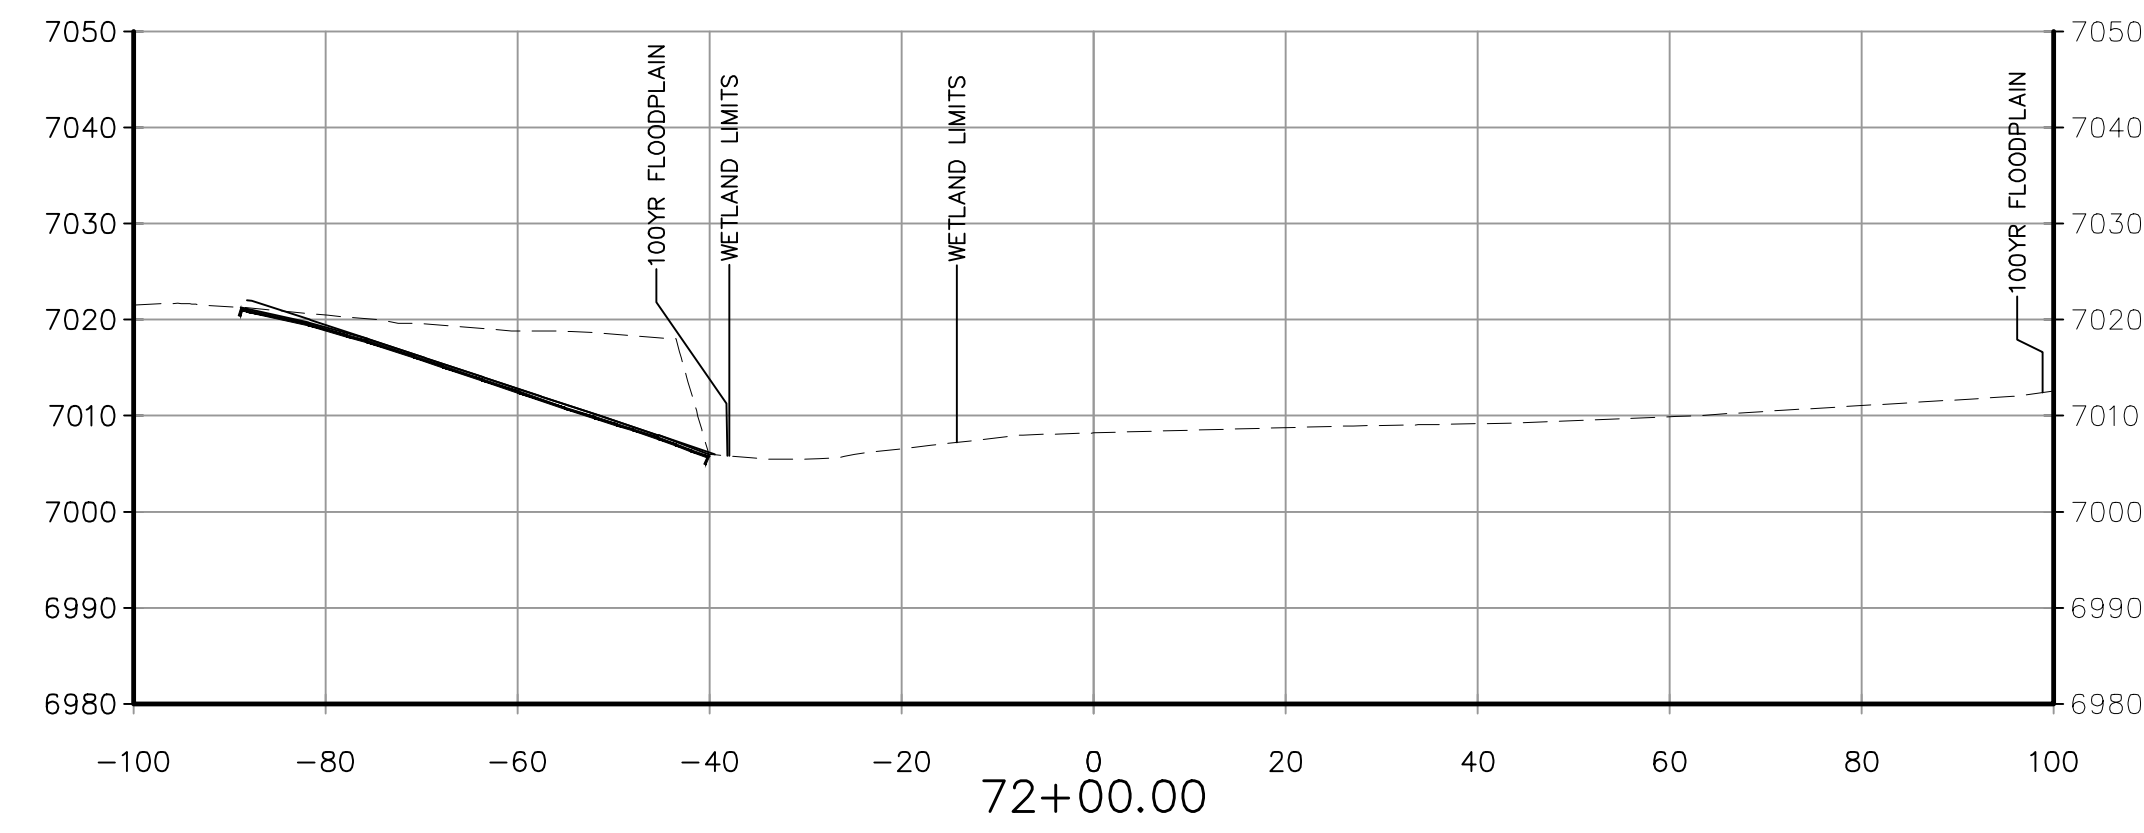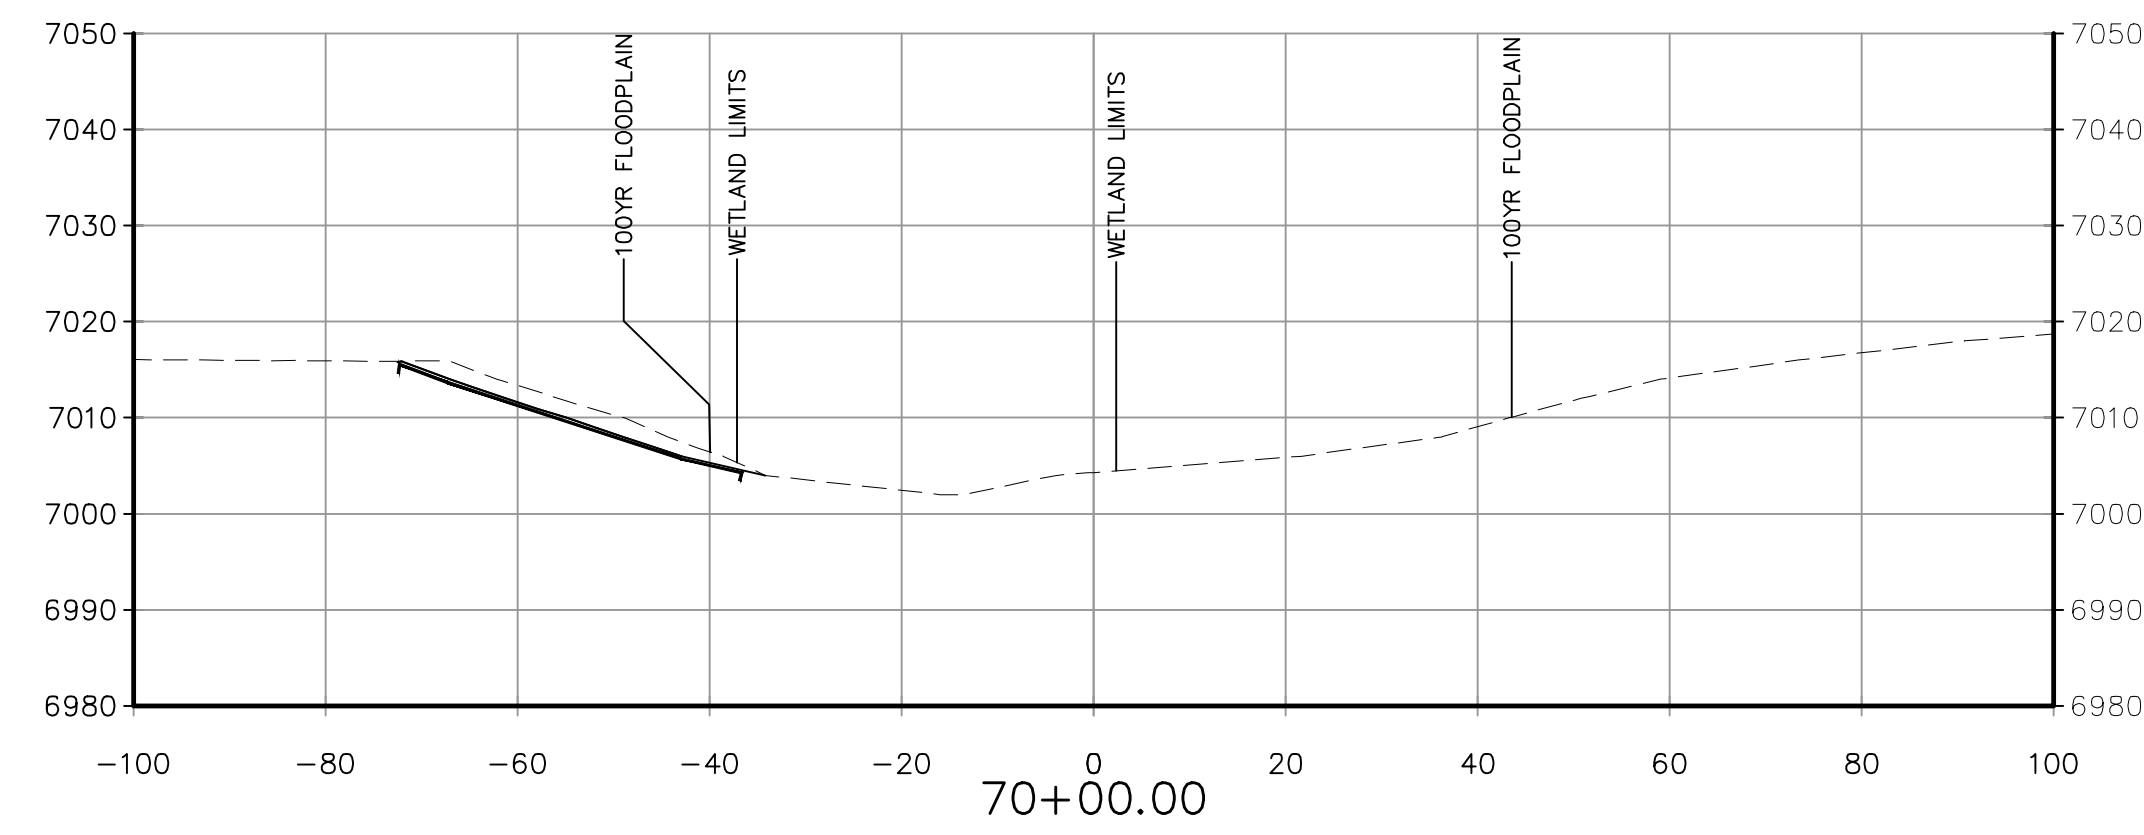

LEGEND



——— EROSION CONTROL MAT  
 - - - - EXISTING GROUND  
 ——— PROPOSED FINISH GRADE

— — — — EXISTING GROUND

———— PROPOSED FINISH GRADE

BRANDING IRON AT SR FILING NO. 2

REPORT NO.	DATE	PROJECT
100	10/1/77	SAND CREEK BANK STABILIZATION PLANS

PROJECT NO. 09-01Z	SCALE:	DATE: 02/06/2020
DESIGNED BY: WAS	HORIZONTAL:	

PROJECT NO. 09-012	SCALE:
DESIGNED BY: WAS	HORIZONTAL:

PROJECT NO.	09-012
DESIGNED BY:	VAS

DESIGNED BY: \_\_\_\_\_  
PROJECT NO. \_\_\_\_\_

DATE: 02/06/2020

SCALE:  
HORIZONTAL:

SCALE:  
HORIZONTAL:


GR05

GR05

102 E. PIKES PEAK AVE., 5TH FLOOR  
COLORADO SPRINGS, CO 80903  
PHONE: 719.955.5485

102 E. PIKES PEAK AVE., 5TH FLOOR  
COLORADO SPRINGS, CO 80903  
PHONE: 719.955.5485

102 E. PIKES PEAK AVE., 5TH FLOOR  
COLORADO SPRINGS, CO 80903  
PHONE: 719.955.5485

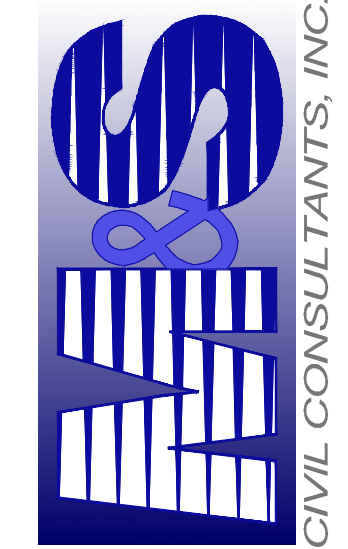

FOR AND ON  
BEHALF OF  
M&S CIVIL  
CONSULTANTS,  
INC.

[illegible]

THE ENGINEER PREPARING THESE PLANS WILL NOT BE RESPONSIBLE, OR LIABLE FOR, UNAUTHORIZED CHANGES TO OR USES OF THESE PLANS. ALL CHANGES TO THE PLANS MUST BE IN WRITING AND MUST BE APPROVED BY THE PREPARER OF THESE PLANS.


AUTIO



FOR BURIED UTILITY INFORMATION  
48 HRS BEFORE YOU DIG  
CALL 1-800-922-1987

EPC 6/23/2020



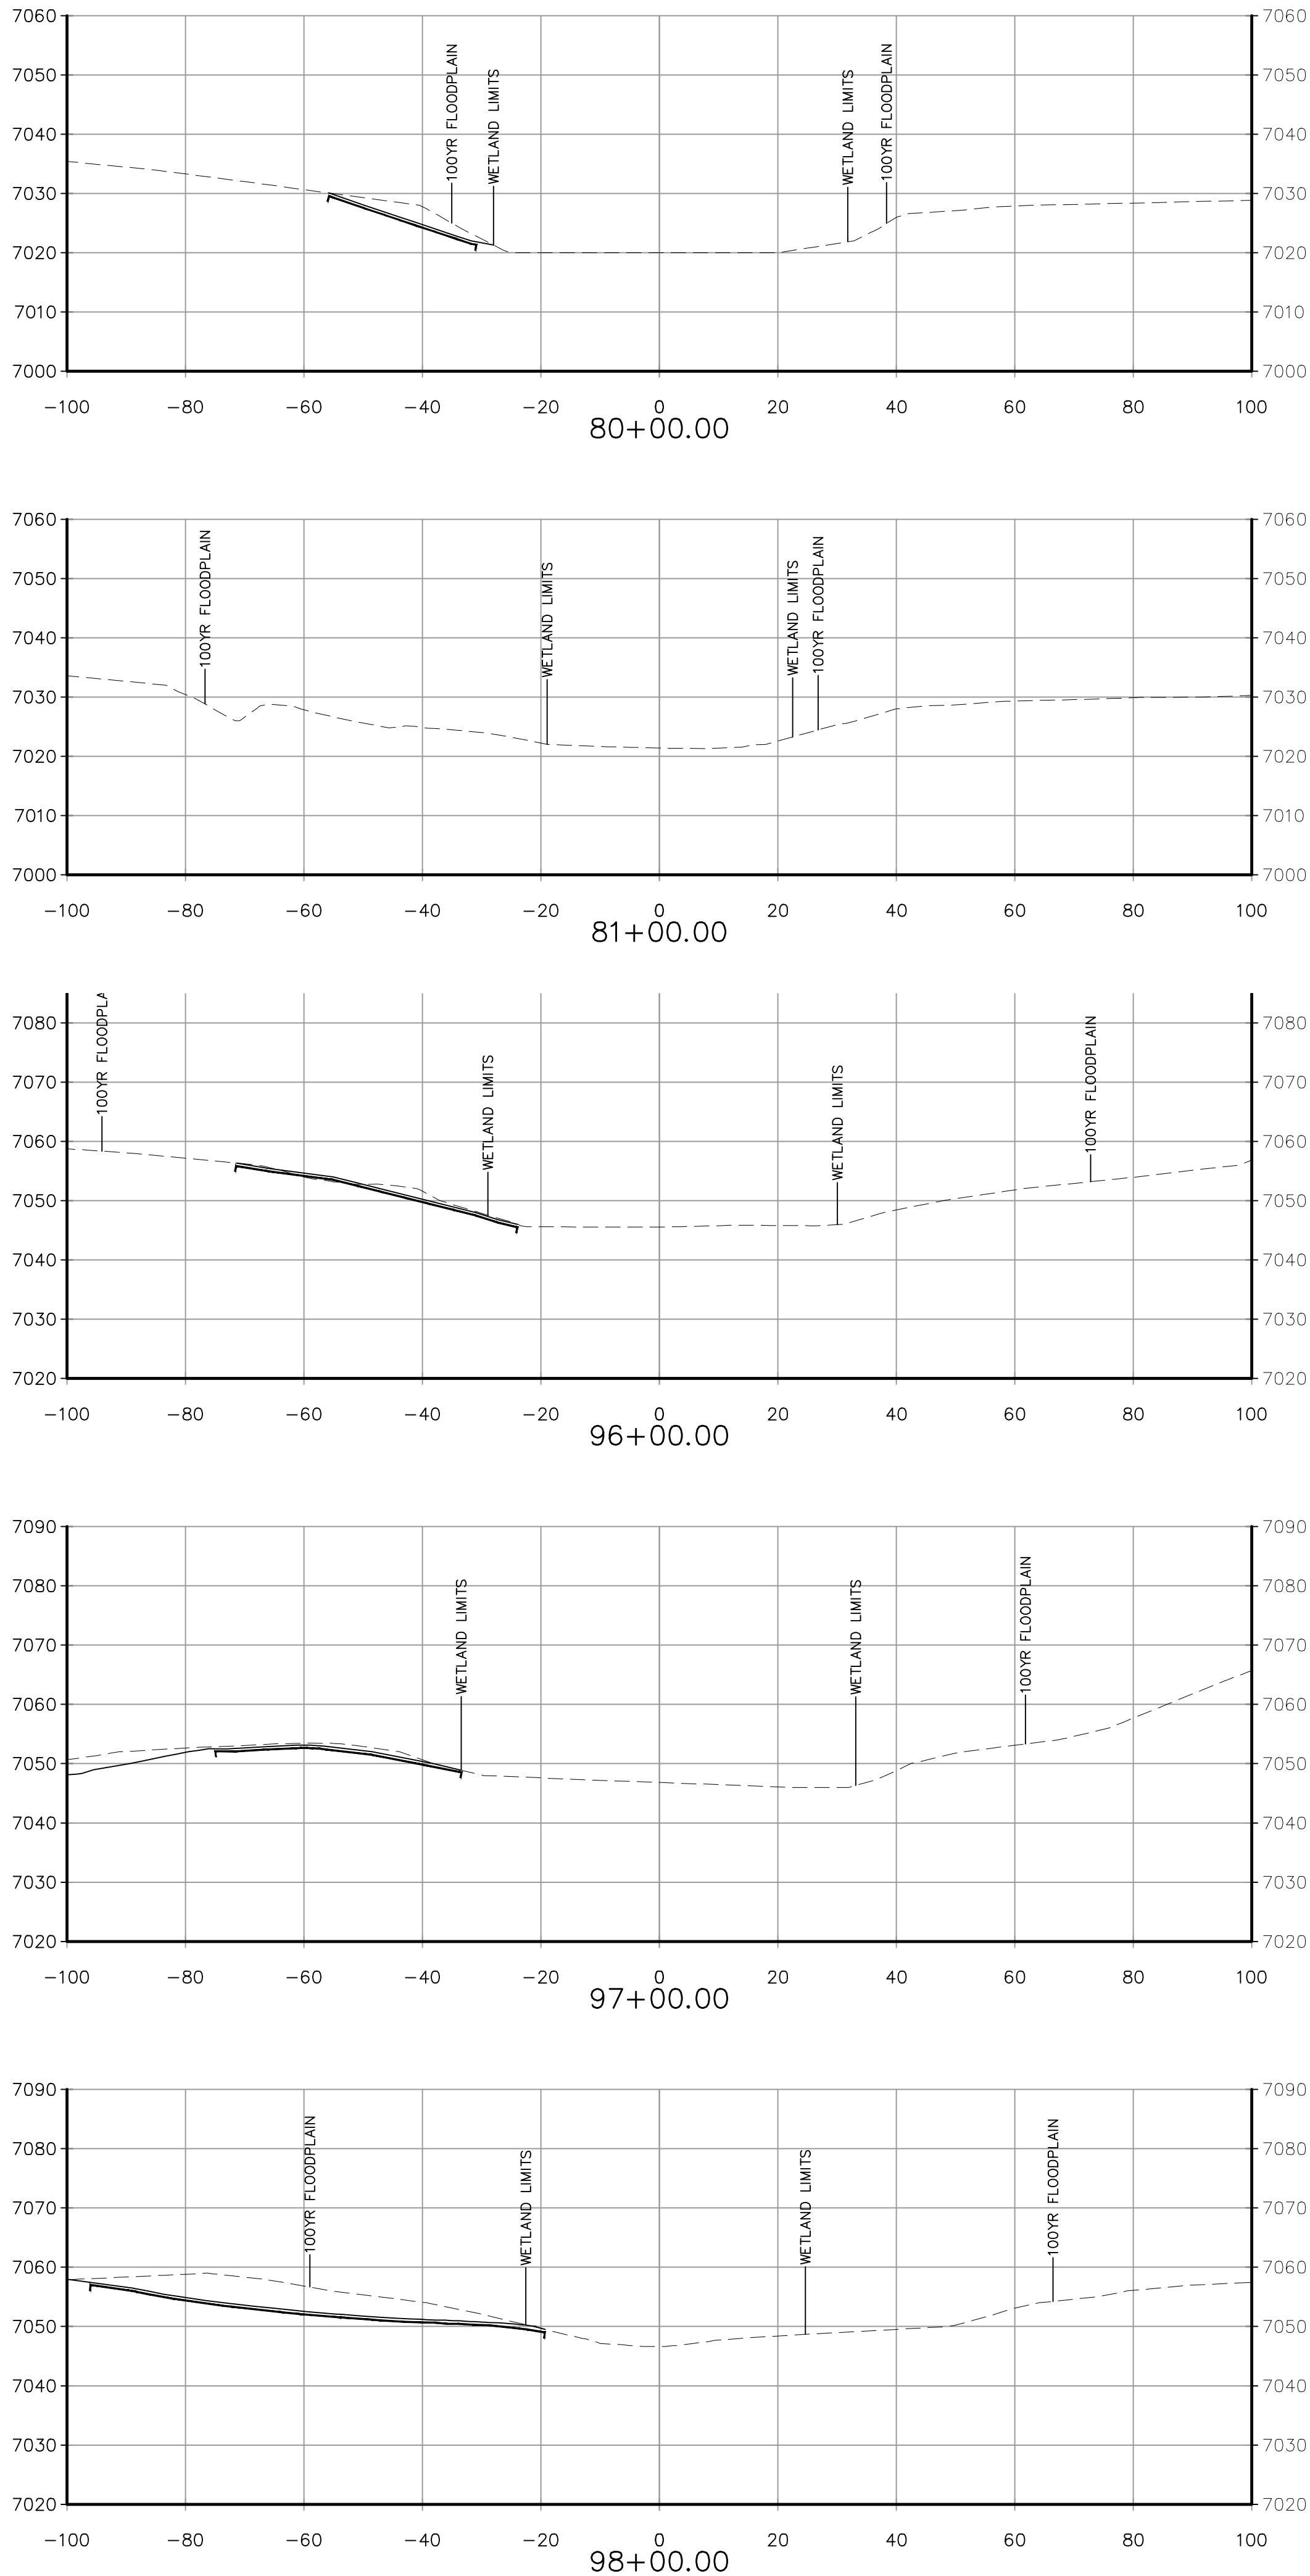

**LEGEND**

D50=24" SOIL RIPRAP

EROSION CONTROL MAT

EXISTING GROUND

PROPOSED FINISH GRADE

Material and Performance Specification Sheet

SC150 Erosion Control Blanket

The extended-term double net erosion control blanket shall be a machine-produced mat of 70% agricultural straw and 30% coconut fiber with a functional longevity of up to 24 months. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the straw and coconut evenly distributed over the entire area of the mat. The blanket shall be covered on the top side with a heavyweight photodegradable polypropylene netting having ultraviolet additives to delay breakdown and an approximate 0.53 x 0.53 (1.59 x 1.59 cm) mesh, and on the bottom side with a lightweight photodegradable polypropylene netting with an approximate 0.50 x 0.50 in (1.27 x 1.27 cm) mesh. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread.

The SC150 shall meet requirements established by the Erosion Control Technology Council (ECTC) Specification and the US Department of Transportation, Federal Highway Administration's (FHWA) Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects, FP-03 Section 713.17 as a type 3.B Extended-term Erosion Control Blanket.

The SC150 is also available with the DOT System™, which consists of installation staple patterns clearly marked on the erosion control blanket with environmentally safe paint. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2.5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

Material Content		
Matrix	70% Straw Fiber 30% Coconut Fiber	0.35 lbs/yd <sup>2</sup> (0.19 kg/m <sup>2</sup> ) 0.15 lbs/yd <sup>2</sup> (0.08 kg/m <sup>2</sup> )
Nettings	Top - Heavyweight photodegradable with UV additives Bottom - Lightweight photodegradable	3.0 lb/1000 ft <sup>2</sup> (1.47 kg/100 m <sup>2</sup> ) 1.5 lb/1000 ft <sup>2</sup> (0.73 kg/100 m <sup>2</sup> )
Thread	Degradable	

SC150 is available in the following standard roll sizes:

Width	Length	Weight ± 10%	Area
6.67 ft (2.03 m)	108 ft (32.92 m)	44 lbs (19.95 kg)	80.0 yd <sup>2</sup> (66.9 m <sup>2</sup> )
16 ft (4.87 m)	108 ft (32.92 m)	105.6 lbs (47.9 kg)	192 yd <sup>2</sup> (165.5 m <sup>2</sup> )

Index Value Properties:

Property	Test Method	Typical
Thickness	ASTM D6525	0.39 in (9.91 mm)
Resiliency	ECTC Guidelines	75%
Water Absorbency	ASTM D1117	285%
Mass/Unit Area	ASTM 6475	11.44 oz/yd <sup>2</sup> (388 g/m <sup>2</sup> )
Swell	ECTC Guidelines	30%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	1.11 oz-in
Light Penetration	ECTC Guidelines	8.7%
Tensile Strength - MD	ASTM D6818	146.6 lbs/ft (2.17 kN/m)
Elongation - MD	ASTM D6818	26.9%
Tensile Strength - TD	ASTM D6818	147.6 lbs/ft (2.19 kN/m)
Elongation - TD	ASTM D6818	25.2%

Bench Scale Testing\* (MTPEP):

Test Method	Parameters	Results
ECTC Method 2	50 mm (2 in)/hr for 30 min	SLR** = 5.47
Rainfall	100mm (4 in)/hr for 30 min	SLR** = 5.67
	150 mm (6 in)/hr for 30 min	SLR** = 5.88
ECTC Method 3	Shear at 0.50 inch soil loss	2.72 lbs/ft <sup>2</sup>
ECTC Method 4	Top Soil, Fescue, 21 day	538% improvement of biomass
Germination	Incubation	538% improvement of biomass

\* Bench Scale Tests should not be used for design purposes.  
\*\* Soil Loss Ratio = Soil loss with Bare Soil/Soil Loss with RECP (soil loss is based on regression analysis).

Updated 3/09

Performance Design Values:

Maximum Permissible Shear Stress	
Unvegetated Shear Stress	2.00 lbs/ft <sup>2</sup> (96 Pa)
Unvegetated Velocity	8.00 ft/s (2.44 m/s)

Slope Design Data: C Factors

Slope Length (L)	Slope Gradients (S)
≤ 3.1	3:1 - 2:1
≤ 20 ft (6 m)	0.001
20-50 ft	0.051
≥ 50 ft (15.2 m)	0.10

Roughness Coefficients- Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.050
0.50 - 2.0 ft	0.050 - 0.018
≥ 2.0 ft (0.60 m)	0.018

Product Participant of:

**CHANNEL INSTALLATION DETAIL**

- Prepare soil before installing rolled erosion control products (RECPs), including any necessary application of lime, fertilizer, and seed.
- Begin at the top of the channel by anchoring the RECPs in a 6" (15cm) deep X 6" (15cm) wide trench with approximately 12" (30cm) of RECPs extended beyond the up-slope portion of the trench. Use the double net at the channel/cutout outlet as supplemental anchor protection as needed. Anchor the RECPs with a row of staples/staples spaced approximately 12" (30cm) apart in the bottom of the trench. Backfill and compact the trench after staking. Apply seed to the compacted soil and fast the remaining 12" (30cm) portion of RECPs back over the seed and compacted soil with a row of staples/staples spaced approximately 12" (30cm) apart across the width of the RECPs.
- Roll center RECPs in direction of water flow in bottom of channel. RECPs will cover with appropriate time against the soil surface. All RECPs must be securely fastened to soil surface by staking approximately 12" (30cm) apart in the slope pattern guide.
- Place consecutive RECPs end-to-end and (single slope) with a 4" (10cm) overlap. Use a double row of staples staggered 4" (10cm) apart in a 6" (15cm) deep X 6" (15cm) wide trench. Backfill and compact the trench after staking.
- Full length edge of RECPs at top of side slopes must be anchored with a row of staples/staples spaced approximately 12" (30cm) apart in a 6" (15cm) deep X 6" (15cm) wide trench. Backfill and compact the trench after staking.
- Adjacent RECPs must be overlapped approximately 2'-0" (5-12.5m) (Depending on RECP type) and stapled.
- In high flow channel applications, a staple check and is recommended at 30 to 40 feet (9-12m) intervals. Use a double row of staples staggered 4" (10cm) apart and 4" (10cm) in center over entire width of the channel.
- The terminal end of the RECPs must be anchored with a row of staples/staples spaced approximately 12" (30cm) apart in a 6" (15cm) deep X 6" (15cm) wide trench. Backfill and compact the trench after staking.

**CRITICAL POINTS**

A: Overlap and Seams  
B: Protected Water Line  
C: Channel Bottom/Side Slope Vertices

**NOTE:**

\*In loose soil conditions, the use of staple or stake length greater than 6" (15cm) may be necessary to properly secure the RECPs.

**DISCLAIMER:**

The information presented herein is general design information only. For specific applications, consult an independent professional for further design guidance.

5401 St. Wendel - Cynthiana Rd. Piquette, IN 47357  
Tel: 800-772-2840  
www.nagreen.com

Drawn on: 5-4-17

Material and Performance Specification Sheet

SC250 Turf Reinforcement Mat

The composite turf reinforcement mat (C-TRM) shall be a machine-produced mat of 70% straw and 30% coconut fiber matrix incorporated into a permanent three-dimensional turf reinforcement matting. The matrix shall be evenly distributed across the entire width of the matting and attached bonded between a heavy duty UV stabilized netting with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings, an ultra heavy UV stabilized, dramatically corrugated (crimped) intermediate netting with 0.5 x 0.5 inch (1.27 x 1.27 cm) openings, and covered by an heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings. The middle corrugated netting shall form prominent closely spaced ridges across the entire width of the dimensional turf reinforcement matting.

The SC250 shall meet requirements established by the Erosion Control Technology Council (ECTC) Specification and the US Department of Transportation, Federal Highway Administration's (FHWA) Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects, FP-03 Section 713.16 as a type 5A, B, and C Permanent Turf Reinforcement Mat.

Installation staple patterns shall be clearly marked on the turf reinforcement matting with environmentally safe paint. All mats shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

Material Content		
Matrix	70% Straw / 30% Coconut fibers	0.35 lbs/yd <sup>2</sup> (0.19 kg/m <sup>2</sup> ) / 0.15 lbs/yd <sup>2</sup> (0.08 kg/m <sup>2</sup> )
Nettings	Top and Bottom, UV stabilized Polypropylene Middle, corrugated UV stabilized Polypropylene	5 lb/1000 ft <sup>2</sup> (2.44 kg/100 m <sup>2</sup> ) 24 lb/1000 ft <sup>2</sup> (11.7 kg/100 m <sup>2</sup> )
Thread	Polypropylene, UV stabilized	

SC250 is available in the following roll sizes:

Width	Length	Weight ± 10%	Area
6.5 ft (2.0 m)	55.5 ft (16.9 m)	34 lbs (15.42 kg)	40.0 yd <sup>2</sup> (33.4 m <sup>2</sup> )

Index Value Properties:

Property	Test Method	Typical	Net Only
Thickness	ASTM D6525	0.72 in (18.3 mm)	0.46 in
Resiliency	ASTM 6524	55.2%	—
Density	ASTM D792	0.53 oz/in <sup>3</sup>	—
Mass/Unit Area	ASTM 6566	17.88 oz/yd <sup>2</sup> (606 g/m <sup>2</sup> )	—
Porosity	ECTC Guidelines	99%	—
Stiffness	ASTM D1388	222.85 oz-in	—
Light Penetration	ECTC Guidelines	8.9%	—
UV Stability	ASTM D4356/1000	100%	100%
Tensile Strength MD	ASTM D6818	620 lbs/ft (9.05 kN/m)	655 lbs/ft
Elongation MD	ASTM D6818	35%	25%
Tensile Strength TD	ASTM D6818	737 lbs/ft (10.75 kN/m)	666 lbs/ft
Elongation TD	ASTM D6818	16%	16%

Bench Scale Testing\* (MTPEP):

Test Method	Parameters	Results
ECTC Method 2	50 mm (2 in)/hr for 30 min	SLR** = 18.25
Rainfall	100mm (4 in)/hr for 30 min	SLR** = 20.87
	150 mm (6 in)/hr for 30 min	SLR** = 22.74
ECTC Method 3	Shear at 0.50 inch soil loss	7.7 lbs/ft <sup>2</sup>
ECTC Method 4	Top Soil, Fescue, 21 day	523% improvement of biomass
Germination	Incubation	523% improvement of biomass

\* Bench Scale Tests should not be used for design purposes.  
\*\* Soil Loss Ratio = Soil loss with Bare Soil/Soil Loss with RECP (soil loss is based on regression analysis).

Updated 3/09

Performance Design Values:

Maximum Permissible Shear Stress	
Unvegetated Shear Stress	3.0 lbs/ft <sup>2</sup> (144 Pa)
Unvegetated Velocity	8.0 ft/s (2.44 m/s)

Slope Design Data: C Factors

Slope Length (L)	Slope Gradients (S)
≤ 3.1	3:1 - 2:1
≤ 20 ft (6 m)	0.001
20-50 ft	0.0081
≥ 50 ft (15.2 m)	0.0286

Roughness Coefficients- Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.040
0.50 - 2.0 ft	0.040 - 0.012
≥ 2.0 ft (0.60 m)	0.011

Product Participant of:

**SLOPE INSTALLATION DETAIL**

- Prepare soil before installing rolled erosion control products (RECPs), including any necessary application of lime, fertilizer, and seed.
- Begin at the top of the slope by anchoring the RECPs in a 6" (15cm) deep X 6" (15cm) wide trench with approximately 12" (30cm) of RECPs extended beyond the up-slope portion of the trench. Anchor the RECPs with a row of staples/staples spaced approximately 12" (30cm) apart in the bottom of the trench. Backfill and compact the trench after staking. Apply seed to the compacted soil and fast the remaining 12" (30cm) portion of RECPs back over the seed and compacted soil with a row of staples/staples spaced approximately 12" (30cm) apart across the width of the RECPs.
- Roll the RECPs (A) down or (B) horizontally across the slope. RECPs will unroll with appropriate side against the soil surface. All RECPs must be securely fastened to soil surface by staking staples/staples in appropriate locations as shown in the staple pattern guide.
- The edges of partial RECPs must be stapled with approximately 2" - 6" (5-15cm) overlap depending on the RECP type.
- Consecutive RECPs installed down the slope must be end over end (single slope) with an approximate 3" (7.5cm) overlap. Staple through overlapped area, approximately 12" (30cm) apart across entire RECPs width.

**CRITICAL POINTS**

A: Overlap and Seams  
B: Protected Water Line  
C: Channel Bottom/Side Slope Vertices

**NOTE:**

\*In loose soil conditions, the use of staple or stake length greater than 6" (15cm) may be necessary to properly secure the RECPs.

**DISCLAIMER:**

The information presented herein is general design information only. For specific applications, consult an independent professional for further design guidance.

5401 St. Wendel - Cynthiana Rd. Piquette, IN 47357  
Tel: 800-772-2840  
www.nagreen.com

Drawn on: 5-4-17

BRANDING IRON AT SR FILING NO. 2

SAND CREEK BANK STABILIZATION PLANS

102 E. PIKE PEAK AVE., 3RD FLOOR  
COLORADO SPRINGS, CO 80903  
PHONE: 719.555.5485

FOR AND ON BEHALF OF  
M&S CIVIL CONSULTANTS, INC.

REGISTERED PROFESSIONAL  
ENGINEER  
STATE OF COLORADO  
No. 37160

NO. DATE: BY: DESCRIPTION:

DATE: 02/06/2020

DESIGNED BY: N/A  
DRAWN BY: ELY  
CHECKED BY: N/A

PROJECT NO. 09-012

SCALE: HORIZONTAL: N/A  
VERTICAL: N/A

SHEET 6 OF 7

GR06

CAUTION



