



LSC TRANSPORTATION CONSULTANTS, INC.
545 East Pikes Peak Avenue, Suite 210
Colorado Springs, CO 80903
(719) 633-2868
FAX (719) 633-5430
E-mail: lsc@lsctrans.com
Website: <http://www.lsctrans.com>

Creekside at Lorson Ranch Filing No. 1 Traffic Impact and Access Analysis (LSC #184520) August 21, 2018 **PUDSP-18-005**

Traffic Engineer's Statement

This traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.



Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

A handwritten signature in blue ink, appearing to read 'John' or 'J.W.', is placed over a horizontal line.

Date

A handwritten date '8/21/18' is written in blue ink over a horizontal line.



LSC TRANSPORTATION CONSULTANTS, INC.
545 East Pikes Peak Avenue, Suite 210
Colorado Springs, CO 80903
(719) 633-2868
FAX (719) 633-5430
E-mail: lsc@lsctrans.com
Website: <http://www.lsctrans.com>

August 21, 2018

Mr. Jeff Mark
The Landhuis Company
212 North Wahsatch Avenue, Suite 301
Colorado Springs, CO 80903

RE: Creekside at Lorson Ranch Filing No. 1
El Paso County, Colorado
Traffic Impact and Access Analysis
LSC #184520

Dear Mr. Mark:

LSC Transportation Consultants, Inc. has prepared this traffic impact analysis for the proposed Creekside at Lorson Ranch Filing No. 1 residential development to be located south of the future Lorson Boulevard between Jimmy Camp Creek and the Jimmy Camp Creek East Tributary in El Paso County, Colorado. The site location is shown on Figure 1.

REPORT CONTENTS

This report contains the following:

- Recent/current street and traffic conditions in the vicinity of the site and the recent report for Lorson Ranch East for identification of existing and planned street widths, lane geometries, traffic controls, posted speed limits, street classification, etc.
- Existing traffic volumes at the key intersections in the vicinity of the site and estimates of short-term and 2040 background traffic volumes.
- The projected average weekday and peak-hour vehicle trips to be generated by the proposed residential development.
- The assignment of the projected trips to the existing and planned street system.
- The resulting short-term and 2040 total traffic volumes on the street system.
- The resulting traffic impacts. The traffic impacts have been quantified by determining the future levels of service at the intersections of Marksheffel Road/Fontaine Boulevard, Marksheffel Road/Lorson Boulevard and the intersections on Lorson Boulevard adjacent to the site.
- Recommendations for street functional classification, traffic controls, and auxiliary turn lanes.

SITE DEVELOPMENT AND LAND USE

Creekside at Lorson Ranch Filing No. 1 is planned to include 235 lots for single-family homes in the area south of the future Lorson Boulevard between Jimmy Camp Creek and the Jimmy Camp Creek East Tributary. This area was included as traffic analysis zones 26 and 126 in the *Lorson Ranch Sketch Plan Traffic Technical Memorandum* by LSC dated April 15, 2016. The Sketch Plan memorandum assumed this area would be developed with 449 single family homes.

Three full-movement access points are proposed to the future Lorson Boulevard. Two of the access points would align with Stingray Drive and Kearsarge Drive. The third access point is located about 768 feet west of Kearsarge Drive. Figure 2 shows the site plan and the proposed access spacing.

ROADWAY AND TRAFFIC CONDITIONS

(Verify)

Area Roadways

Figure 1 shows the roadways in the vicinity of the site. The major roadways are identified below followed by a brief description of each.

- **Marksheffel Road** extends north from the Link Road/C&S Road intersection in Fountain, Colorado to north of Woodmen Road. Marksheffel Road is shown as a future four-lane Expressway on the County *Major Transportation Corridors Plan (MTCP)*. The posted speed limit on Marksheffel Road at Fontaine Boulevard is 45 miles per hour (mph). The PPRTA has completed the Marksheffel Road upgrade between ~~Fontaine Boulevard~~ Mesa Ridge Parkway and Bradley Road. This included intersection improvements at the Fontaine Boulevard intersection.
- **Fontaine Boulevard** is designated as a four-lane Urban Principal Arterial east of Marksheffel Road and it has been constructed as such from Marksheffel Road east to Old Glory Drive. As part of the Lorson Ranch East development Fontaine Boulevard will be extended east from Old Glory Drive. In the interim, an Urban Non-Residential Collector Street will be constructed east of Stingray Lane as development progresses. The posted speed limit on Fontaine Boulevard is 35 mph just east of (and a short distance west of) Marksheffel Road. The speed limit increases to 45 mph just east of the bridge over Jimmy Camp Creek.
- **Lorson Boulevard** is a planned future roadway that will extend from Marksheffel Road about one-half mile south of Fontaine Boulevard. Lorson Boulevard will be classified as an Urban Non-Residential Collector Street (modified for a 44-foot street width rather than the standard 52-foot street width) with an 80-foot-wide right-of-way. East of Stingray Lane, Lorson Boulevard will be classified as an Urban Non-Residential Collector Street (modified for a 44-foot street width rather than the standard 52-foot street width). The right-of-way will vary from 64 feet to 72 feet to accommodate anticipated future right-turn deceleration lanes. The right-of-way not adjacent to right-turn lanes would be 64 feet. Also, tracts adjacent to the right-of-way will allow for future right-of-way expansion to 80 feet if ever needed. The

proposed cross section includes two 14-foot "shared-use" travel lanes, a striped two-way left-turn lane and right-turn deceleration lanes where warranted.

Baseline Traffic Volumes

Figure 3 shows the recent traffic volumes at the intersection of Marksheffel Road/Fontaine Boulevard. These "baseline" traffic volumes were based on traffic counts conducted by LSC in March 2018. The traffic count reports are attached.

Baseline Levels of Service

Level of service (LOS) is a quantitative measure of the level of congestion or delay at an intersection. Level of service is indicated on a scale from "A" to "F." LOS A represents control delay of less than 10 seconds for unsignalized and signalized intersections. LOS F represents control delay of more than 50 seconds for unsignalized intersections and more than 80 seconds for signalized intersections. Table 1 shows the level of service delay ranges.

Table 1 Intersection Levels of Service Delay Ranges			
Level of Service	Signalized Intersections		Unsignalized Intersections
	Average Control Delay (seconds per vehicle)	V/C ⁽¹⁾	Average Control Delay (seconds per vehicle) ⁽²⁾
A	10.0 sec or less	less than 0.60	10.0 sec or less
B	10.1-20.0 sec	0.60-0.69	10.1-15.0 sec
C	20.1-35.0 sec	0.70-0.79	15.1-25.0 sec
D	35.1-55.0 sec	0.80-0.89	25.1-35.0 sec
E	55.1-80.0 sec	0.90-0.99	35.1-50.0 sec
F	80.1 sec or more	1.00 and greater	50.1 sec or more

(1) Source: *Transportation Research Circular 212*
(2) For unsignalized intersections if V/C ratio is greater than 1.0 the level of service is LOS F regardless of the projected average control delay per vehicle.

The intersection of Marksheffel/Fontaine was analyzed to determine the baseline levels of service using Synchro. Figure 3 shows the level of service analysis results. As shown on the figure, all movements at this intersection are level of service C or better during the peak hours. The level of service (LOS) reports are attached.

SHORT-TERM (YEAR 2020) BACKGROUND TRAFFIC

Background traffic is the traffic estimated to be on the roadways without the Creekside at Lorson Ranch East Filing 1 traffic. The short-term background traffic volumes are shown in Figure 4. The background traffic volumes are based on the existing traffic volumes shown in Figure 3 with a portion of the volumes assumed to be rerouted with the construction of Lorson Boulevard from

Marksheffel Road to Lamprey Drive including crossing both the Jimmy Camp Creek main channel and east tributary. The short-term background traffic also includes additional traffic generated by buildup of the residential portion of Lorson Ranch subdivisions north of Lorson Boulevard between Jimmy Camp Creek and the east tributary, the Carriage Meadows North and Carriage Meadows South subdivisions located west of Jimmy Camp Creek, Lorson Ranch East Filings 1 and 2, and the school located northeast of Fontaine Boulevard and Lamprey Drive, but assumes zero traffic generated by Creekside at Lorson Ranch East Filing 1.

2040 BACKGROUND TRAFFIC

Figure 5 shows the projected 2040 background traffic volumes. The 2040 background traffic volumes are based on estimates of traffic projected to be generated at buildup of the Lorson Ranch Sketch Plan (excluding the traffic projected to be generated by Creekside Lorson Ranch Filing 1) and traffic volumes shown in the *Marksheffel Road South Corridor Preservation Plan* dated July 2014. Appendix Table 1 shows the trip generation estimates for all existing and future land uses assumed to be built out by 2040 in the Lorson Ranch development. The 2040 background volumes also assume full buildup of the street network within Lorson Ranch but assume Meridian Road has not been extended south to Fontaine Boulevard.

TRIP GENERATION

Estimates of the traffic volumes expected to be generated by the site have been made using the nationally published trip generation rates found in *Trip Generation, 10th Edition, 2017* by the Institute of Transportation Engineers (ITE). Table 2 shows the results of the trip generation estimates. Table 2 also shows a comparison of the trip generation estimate for this same area assumed in the *Lorson Ranch Sketch Plan Traffic Technical Memorandum* by LSC dated April 15, 2016. The estimate contained in the Sketch Plan memorandum was made using the 9th edition of the *Trip Generation* manual.

As shown in Table 2, Creekside at Lorson Ranch East Filing 1 is projected to generate about 2,218 new vehicle-trips on the average weekday, with about one-half of the vehicles entering and one-half of the vehicles exiting in a 24-hour period. During the morning peak hour, which generally occurs for one hour between 6:30 and 8:30 a.m., about 43 vehicles would enter and 130 vehicles would exit the site. During the afternoon peak hour, which generally occurs for one hour between 4:30 and 6:30 p.m., about 147 vehicles would enter and 86 vehicles would exit the site.

TRIP DISTRIBUTION AND ASSIGNMENT

The directional distribution of the site-generated traffic volumes on the street and roadway system serving the site is one of the most important factors in determining the site's traffic impacts. Figure 6 shows the external trip distribution estimates (external to Lorson Ranch). The directional distribution estimates have been based on the location of the site with respect to the regional residential employment, commercial, and activity centers; the land use proposed; the access/roadway connections assumed; the roadway network; and the most recent traffic counts

conducted at the intersection of Marksheffel/Fontaine. The number of external vehicle trips were based on the internal trip estimates shown in Appendix Table 2.

Figures 7 and 8 show the short-term and long-term site-generated traffic volume estimates, respectively. These volumes were determined by first assigning the internal vehicle trips to the street network based on the location of the planned school site located northeast of the intersection of Fontaine Boulevard and Lamprey Drive and the future retail sites located near the intersection of Fontaine Boulevard and Carriage Meadows Drive. The short-term internal trip assignment included only trips to and from the school site. For the short-term scenario the retail internal trips were included in the external trip assignment. The long-term internal trip assignment included both trips to and from the school and the retail sites.

The external vehicle trips were then assigned to the street network by applying the trip distribution percentages (from Figure 6) to the external trip generation estimates. The internal and external site-generated traffic volumes were then summed to determine the total site-generated traffic volumes.

PROJECTED TOTAL TRAFFIC

Figure 9 shows the short-term total traffic volumes. These volumes are the sum of the short-term background traffic volumes (from Figure 4) plus the short-term site-generated traffic volumes (from Figure 7).

Figure 10 shows the 2040 total traffic volumes. These volumes are the sum of the 2040 background traffic volumes (from Figure 5) plus the long-term site-generated traffic volumes (from Figure 8).

PROJECTED LEVELS OF SERVICE

The intersections of Marksheffel Road/Fontaine Boulevard and Marksheffel Road/Lorson Boulevard and the access points along Lorson Boulevard adjacent to the site have been analyzed to determine the projected levels of service for the short-term and 2040 background and total traffic volumes based on the signalized method of analysis from Synchro and the unsignalized method of analysis procedures outlined in the *Highway Capacity Manual, 2010 Edition* by the Transportation Research Board. The level of service reports are attached. The results of the analysis are shown in Figures 4, 5, 9, and 10.

Marksheffel/Fontaine

The signal-controlled Marksheffel Road/Fontaine Boulevard intersection is projected to continue to operate at level of service D or better for all movements based on the short-term total traffic volumes. By 2040 this intersection is projected to operate at an overall LOS D or better during the peak hours; however, the southbound left-turn and westbound left-turn movements are projected to operate at LOS E during the afternoon peak hour based on both the background and total traffic volumes.

Marksheffel/Lorson

Based on the projected short-term total traffic volumes the westbound left-turn movement at the intersection of Marksheffel/Lorson is projected to operate at LOS F during the morning peak hour and LOS E during the afternoon peak hour if this intersection is two-way stop-sign controlled. If this intersection were to be signal controlled all movements are projected to operate at LOS B or better during the peak hours based on both short-term and 2040 total traffic volumes.

Lorson Boulevard Intersections

All movements at the intersections of Lorson/Tensas, Lorson/Kearsarge, Lorson/Old Glory, and Lorson/Stingray are projected to operate at LOS D or better during the peak hours based on the projected short-term and 2040 total traffic volumes as two-way stop-sign-controlled intersections.

TRAFFIC SIGNAL WARRANT ANALYSIS

The intersection of Marksheffel/Lorson was analyzed to determine when the Four-Hour Vehicular Volume Traffic Signal Warrant thresholds would be reached or exceeded based on the projected morning and afternoon peak-hour short-term traffic volumes. The results of the analysis are shown in Figure 11. The minor approach volumes were assumed to include the westbound left-turn movements only.

As shown in the figure, the thresholds for a Four-Hour Vehicular Volume Traffic Signal Warrant are projected to be exceeded during the morning and afternoon peak hours based on the projected short-term background and total traffic volumes. In order for a Four-Hour Traffic Signal Warrant to be satisfied, the volume threshold would need to be met for two additional hours of the day. For example, the four-hour warrant would be satisfied with the volume thresholds met for the one hour in the morning, two hours (instead of the one-hour peak) during the afternoon peak period, and an hour during the mid-afternoon. The satisfaction of warrants does not indicate that a signal must be installed. The decision to require a signal to be installed at this location rests with the El Paso County Department of Transportation.

TRAFFIC SIGNAL ESCROW PERCENTAGES/AMOUNTS

As shown in Figure 11, the intersection of Marksheffel/Lorson is likely to meet a traffic signal warrant based on the short-term total traffic volumes. Table 3 shows the projected number of westbound left-turning vehicles at the intersection of Lorson/Marksheffel estimated to be generated by future developments within Lorson Ranch. Estimates of westbound left-turning vehicles due to existing or approved developments were not included as they will not participate in funding of this signal. The specific developments included in the calculation are listed in the table. These volumes were used to calculate a fair share contribution toward a future signal at

this intersection. Assuming a total signal cost of \$300,000, a fair share contribution toward a future signal at this intersection would be \$74,216 for Creekside at Lorson Ranch East Filing 1.

ROADWAY CLASSIFICATIONS

As shown on Figure 12, all of the internal streets within Creekside at Lorson Ranch Filing 1 should be classified as either Urban Local (Low Volume) or Urban Local.

ROADWAY IMPROVEMENT FEE PROGRAM

This project will be required to participate in the El Paso County Road Improvement Fee Program. Creekside at Lorson Ranch Filing 1 will join the ten-mil PID. The ten-mil PID building permit fee portion associated with this option is \$923 per single-family dwelling unit. Based on 235 lots, the total building permit fee would be \$216,905.

CONCLUSIONS AND RECOMMENDATIONS

Trip Generation

subdivision?

Fix this paragraph.

- The proposed school is projected to generate about 1,943 new vehicle trips on the average weekday, with about one-half of the vehicles entering and one-half of the vehicles exiting in a 24-hour period. During the morning peak hour, which generally occurs for one hour between 6:30 and 8:30 a.m., about 344 vehicles would enter and 293 vehicles would exit the site. During the afternoon peak hour of the school, which was assumed to occur for one hour between 2:30 to 4:30 p.m., about 154 vehicles would enter and 186 vehicles would exit the site. During the afternoon peak hour of the adjacent street traffic, which generally occurs for one hour between 4:30 and 6:30 p.m., about 73 vehicles would enter and 76 vehicles would exit the site.


Projected Levels of Service

- The signal-controlled Marksheffel Road/Fontaine Boulevard intersection is projected to operate at an overall level of service D or better based on the short-term and 2040 background and total traffic conditions. The southbound left-turn and westbound left-turn movements are projected to operate at LOS E during the afternoon peak hour based on both the background and total traffic volumes.
- Based on the projected short-term total traffic volumes, the westbound left-turn movement at the intersection of Marksheffel/Lorson is projected to operate at LOS F during the morning peak hour and LOS E during the afternoon peak hour if this intersection is two-way stop-sign controlled. If this intersection were to be signal-controlled all movements are projected to operate at LOS B or better during the peak hours based on both short-term and 2040 total traffic volumes.

- All movements at the intersections of Lorson/Tensas, Lorson/Kearsarge, Lorson/Old Glory and Lorson/Stingray are projected to operate at LOS D or better during the peak hours based on the projected short-term and 2040 total traffic volumes as two-way stop-sign-controlled intersections.

Recommended Auxiliary Turn Lanes on Lorson Boulevard

- Based on the projected long-term traffic volumes, a westbound right-turn deceleration lane would be required on Lorson Boulevard approaching Old Glory Drive. This lane should be 155 feet long plus a 160-foot taper. A westbound right-turn deceleration lane would **not** be required approaching Kearsarge Drive and Stingray Drive.
- Based on the projected short-term and 2040 traffic volumes, eastbound right-turn deceleration lanes would be **not** be required on Lorson Boulevard approaching Tensas Drive, Kearsarge Drive, and Stingray Drive.
- Based on the projected short-term and 2040 traffic volumes, left-turn lanes would be **not** be required on Lorson Boulevard approaching Tensas Drive, Kearsarge Drive, Old Glory Drive, and Stingray Drive. However, the Non-Residential Collector would provide one through lane in each direction plus a center two-way left-turn lane. This center painted median would accommodate left turns at this intersection.



Please contact me if you have any questions or need further assistance.

Sincerely,

LSC TRANSPORTATION CONSULTANTS, INC.

By: Jeffrey C. Hodsdon, P.E., PTOE
Principal

JCH:KDF:bjwb

Enclosures: Table 2
Appendix Tables 1 and 2
Figures 1-12
Traffic Count Reports
Level of Service Reports


Table 2
Trip Generation Estimate
Lorson Ranch PK-8 School

**Appendix Table 1
Porson Ranch Sketch Plan
Trip Generation Estimate**

Land Use Data					Trip Generation Rates ⁽¹⁾					Raw ITE Trip Generation (Individual Driveaway Trips)					School Internal Trips ⁽²⁾				Retail Internal Trips ⁽²⁾				Pass-by ⁽³⁾ (%)	Pass-by Trips				Total New External Trips									
Traffic Zone	Name	ITE Land Use	ITE Code	Quantity	Unit	Daily		AM Peak Hour		PM Peak Hour		Daily		AM Peak Hour		PM Peak Hour		Daily		AM Peak Hour		PM Peak Hour		Daily	AM Peak Hour		PM Peak Hour										
						In	Out	In	Out	In	Out	In	Out	In	Out	In	Out	In	Out	In	Out	In	Out		In	Out	In	Out									
RESIDENTIAL																																					
All Residential North of Lorson Boulevard "Between the Creeks"																																					
8	Ponderosa	Single-Family Detached Housing	210	102	DU ⁽⁴⁾	9.44	0.19	0.56	0.62	0.37	963	19	57	64	37	28	2	5	1	1	106	1	2	5	2	0%	0	0	0	0	0	829	16	50	58	34	
9	Ponderosa	Single-Family Detached Housing	210	102	DU	9.44	0.19	0.56	0.62	0.37	963	19	57	64	37	28	2	5	1	1	106	1	2	5	2	0%	0	0	0	0	0	829	16	50	58	34	
10	Meadows Fil 1	Single-Family Detached Housing	210	97	DU	9.44	0.19	0.56	0.62	0.37	916	18	54	60	36	27	2	5	1	1	101	0	2	5	2	0%	0	0	0	0	0	788	16	47	54	33	
11	Meadows Fil 3	Single-Family Detached Housing	210	51	DU	9.44	0.19	0.56	0.62	0.37	481	9	28	32	19	14	1	2	1	0	53	0	1	3	1	0%	0	0	0	0	0	414	8	25	28	18	
12	Meadows Fil 3	Single-Family Detached Housing	210	87	DU	9.44	0.19	0.56	0.62	0.37	821	16	48	54	32	24	2	4	1	1	91	0	1	4	2	0%	0	0	0	0	0	706	14	43	49	29	
3	The Meadows Fil 2	Single-Family Detached Housing	210	109	DU	9.44	0.19	0.56	0.62	0.37	1,029	20	60	68	40	30	3	5	1	1	114	1	2	6	3	0%	0	0	0	0	0	885	16	53	61	36	
13	Allegiant Fil 1	Single-Family Detached Housing	210	97	DU	9.44	0.19	0.56	0.62	0.37	1,926	38	113	127	75	27	2	5	1	1	101	0	2	5	2	0%	0	0	0	0	0	788	16	47	54	33	
5	Buffalo Crossing	Single-Family Detached Housing	210	204	DU	9.44	0.19	0.56	0.62	0.37	337	5	16	16	10	56	5	10	2	1	213	1	3	10	5	0%	0	0	0	0	0	1,657	32	100	115	69	
	Townhomes at Lorson Ranch	Multifamily Housing	210	46	DU	7.32	0.11	0.35	0.35	0.21	557	11	33	37	22	10	1	2	0	0	37	0	1	2	1	0%	0	0	0	0	0	290	4	13	14	9	
6	Pioneer Landing	Single-Family Detached Housing	210	59	DU	9.44	0.19	0.56	0.62	0.37	557	11	33	37	22	16	1	3	1	0	62	0	1	3	1	0%	0	0	0	0	0	479	10	29	33	21	
7	Pioneer Landing	Single-Family Detached Housing	210	59	DU	9.44	0.19	0.56	0.62	0.37	557	11	33	37	22	16	1	3	1	0	62	0	1	3	1	0%	0	0	0	0	0	479	10	29	33	21	
15	Meadows Future Fil 4 West	Single-Family Detached Housing	210	110	DU	9.44	0.19	0.56	0.62	0.37	1,038	20	61	69	40	30	3	5	1	1	115	1	2	6	3	0%	0	0	0	0	0	893	16	54	62	36	
16	Meadows Future Fil 4 East	Single-Family Detached Housing	210	126	DU	9.44	0.19	0.56	0.62	0.37	1,189	23	70	79	46	35	3	6	1	1	131	1	2	6	3	0%	0	0	0	0	0	252	5	14	17	10	
18	Ponderosa Future Fil	Single-Family Detached Housing	210	31	DU	9.44	0.19	0.56	0.62	0.37	293	6	17	19	11	47	4	8	2	1	177	1	3	9	4	0%	0	0	0	0	0	1,381	26	83	95	57	
39	Pioneer Landing Fil 2	Single-Family Detached Housing	210	170	DU	9.44	0.19	0.56	0.62	0.37	1,605	31	94	106	62	397	33	70	15	10	1,501	7	26	74	33	0%	0	0	0	0	0	11,693	224	699	803	482	
Total All Residential "Between the Creeks"					1,450	DU	13,591					264	795	892	525	397	33	70	15	10	1,501	7	26	74	33	11,693				224							
Residential Adjacent to Marksheffel																																					
1	Carriage Meadows North	Single-Family Detached Housing	210	159	DU	9.44	0.19	0.56	0.62	0.37	1,501	29	88	99	58	44	4	8	2	1	166	1	3	8	4	0%	0	0	0	0	0	1,291	24	77	89	53	
147	Carriage Meadows South	Multifamily Housing	210	72	DU	7.32	0.11	0.35	0.35	0.21	527	8	26	25	15	15	1	3	1	0	58	0	1	3	1	0%	0	0	0	0	0	454	7	22	21	14	
47		Single-Family Detached Housing	210	86	DU	9.44	0.19	0.56	0.62	0.37	812	16	48	54	32	24	2	4	1	1	90	0	1	4	2	0%	0	0	0	0	0	698	14	43	49	29	
247		Single-Family Detached Housing	210	51	DU	9.44	0.19	0.56	0.62	0.37	481	9	28	32	19	14	1	2	1	0	53	0	1	3	1	0%	0	0	0	0	0	414	8	25	28	18	
347		Single-Family Detached Housing	210	97	DU	9.44	0.19	0.56	0.62	0.37	916	18	54	60	36	27	2	5	1	1	101	0	2	5	2	0%	0	0	0	0	0	788	16	47	54	33	
Total All Residential Adjacent to Marksheffel					465	DU	4,237					80	244	270	160	124	10	22	6	3	166	1	3	8	4	0%	0	0	0	0	0	3,645	69	214	241	147	
Total All Residential "Between the Creeks" and Adjacent to Marksheffel					1,915	DU	17,828					344	1,039	1,162	685	521	43	92	21	13	1,969	8	34	97	43	15,338				293							
Lorson Ranch East																																					
42	North of Fontaine	Single-Family Detached Housing	210	277	DU	9.44	0.19	0.56	0.62	0.37	2,615	51	154	173	101																						

**Appendix Table 2
Creekside at Lorson Ranch Filing No. 1
Internal Trip Estimate**

Raw ITE Trip Generation (Individual Driveway Trips)																																
ITE Land Use	ITE Code	Quantity	Unit	Trip Generation Rates ⁽¹⁾				Percent Internal Trips				Total Internal Trips				Total External Trips																
				Daily		AM Peak Hour		PM Peak Hour		Daily		AM Peak Hour		PM Peak Hour		Daily		AM Peak Hour		PM Peak Hour												
				In	Out	In	Out	In	Out	In	Out	In	Out	In	Out	Daily	In	Out	In	Out												
Single-Family Detached Housing	210	4,831	DU ⁽²⁾	9.44	0.19	0.56	0.62	0.37		45,605	894	2,681	3,013	1,770		School	3%	13%	9%	2%	2%	1,360	117	241	53	29						
Residential Condominium/Townhouse	210	118	DU	7.32	0.11	0.35	0.35	0.21		864	12	42	42	24		Retail	11%	3%	3%	8%	7%	5,131	25	81	253	117						
										46,469	906	2,723	3,055	1,794		Total	14%	16%	12%	10%	8%	6,491	142	322	306	146	39,978	764	2,401	2,749	1,648	
Elementary School	520	690	Students	1.89	0.36	0.31	0.07	0.08		1,304	250	213	51	53			70%	70%	40%	40%	70%	913	175	85	20	37	391	75	128	31	16	
Middle School/Junior High School	522	300	Students	2.13	0.31	0.27	0.07	0.08		639	94	80	22	23			70%	70%	40%	40%	70%	447	66	32	9	16	192	28	48	13	7	
										Total School							1,943	344	293	73	76		1,360	241	117	29	53	583	103	176	44	23
Shopping Center	820	219	KSF ⁽³⁾	46.75	0.74	0.45	2.13	2.30		10,261	162	99	467	506			50%	50%	25%	25%	50%	5,131	81	25	117	253	5,129	80	74	350	252	
										Total School and Retail							12,204	506	392	540	582		6,491	322	142	146	306	45,690	947	2,651	3,143	1,923

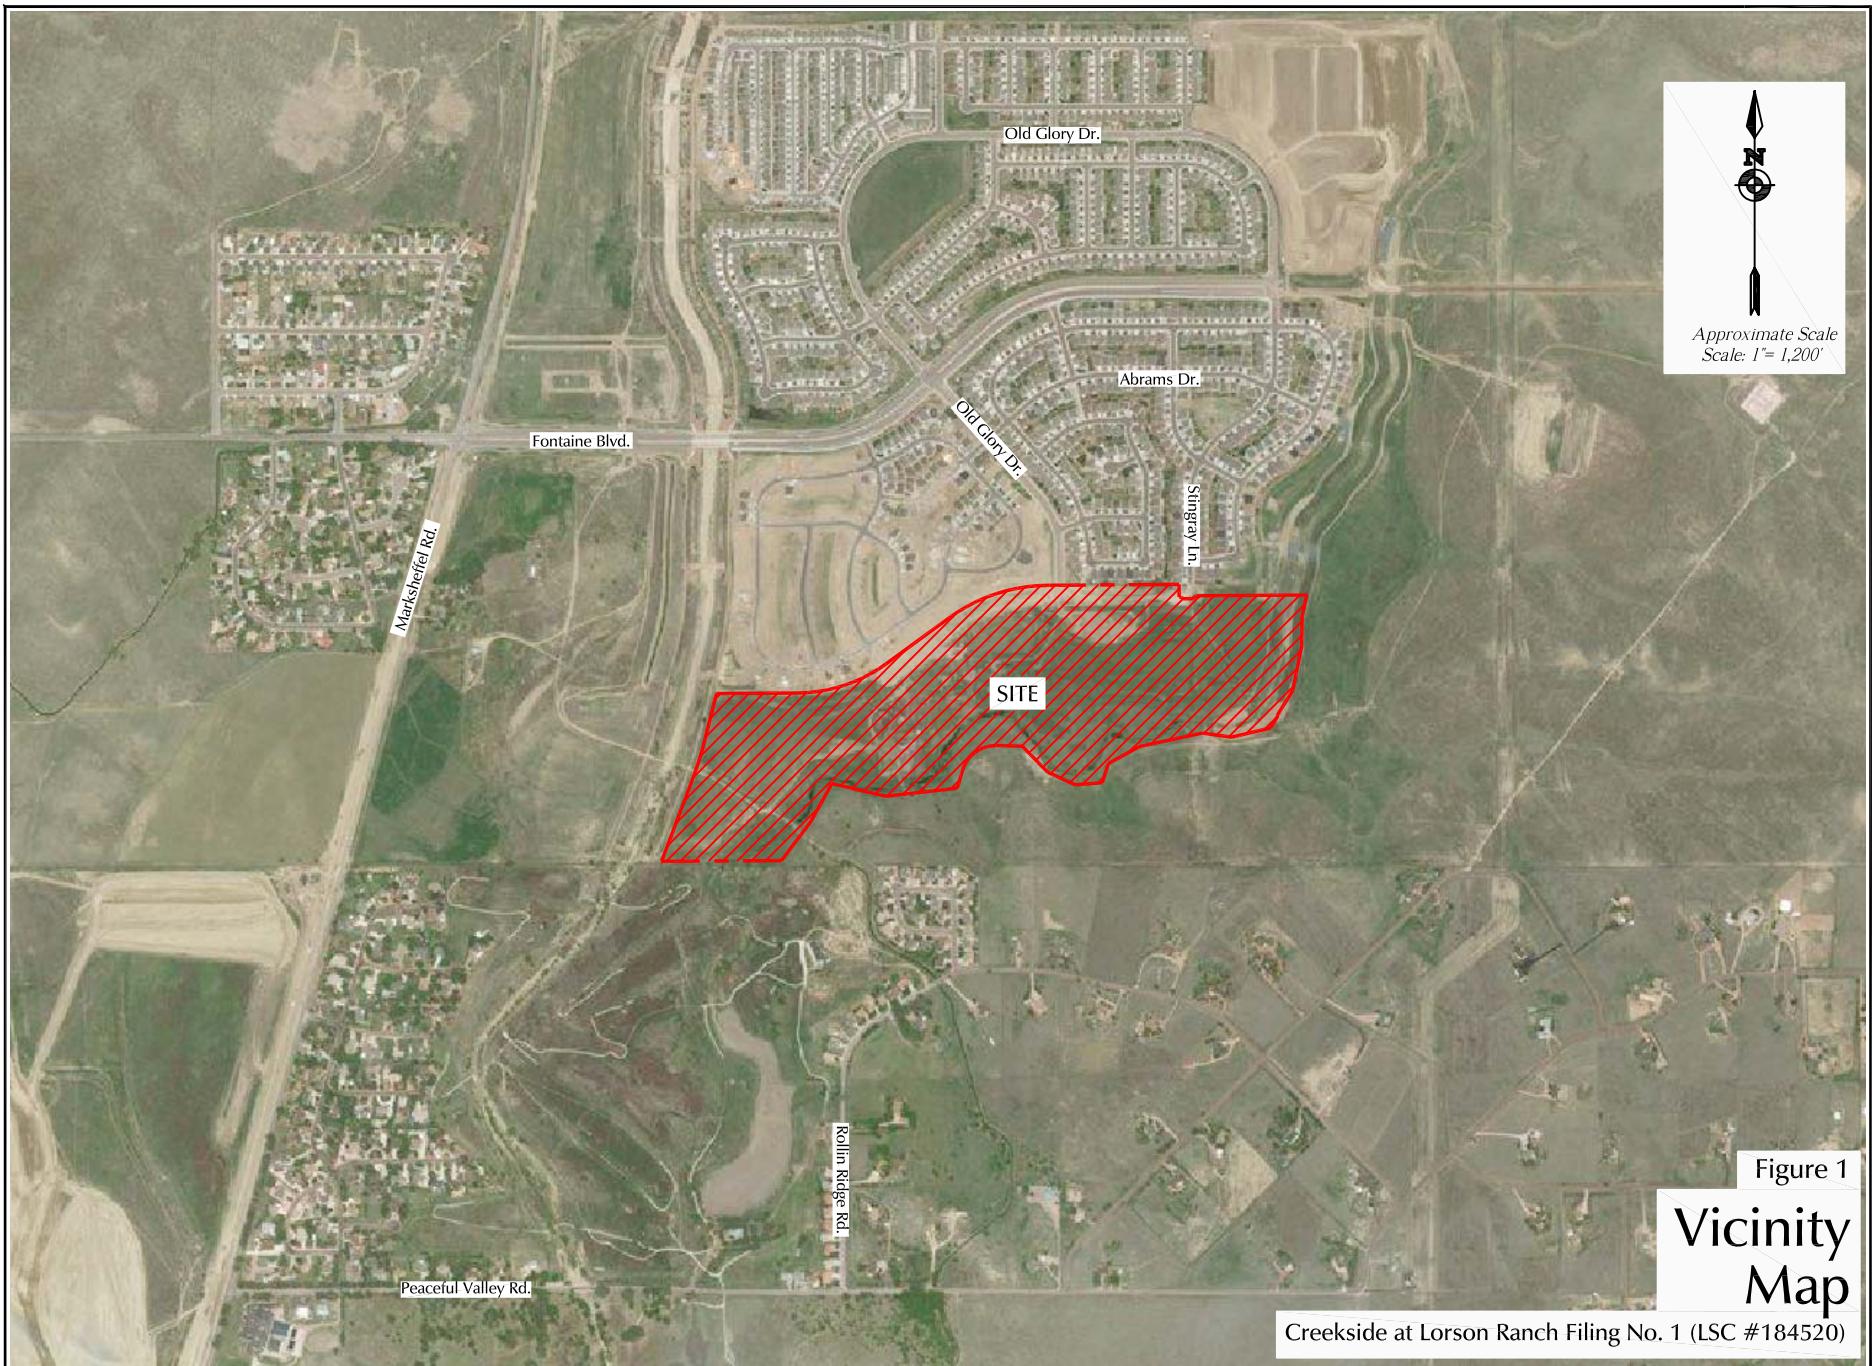




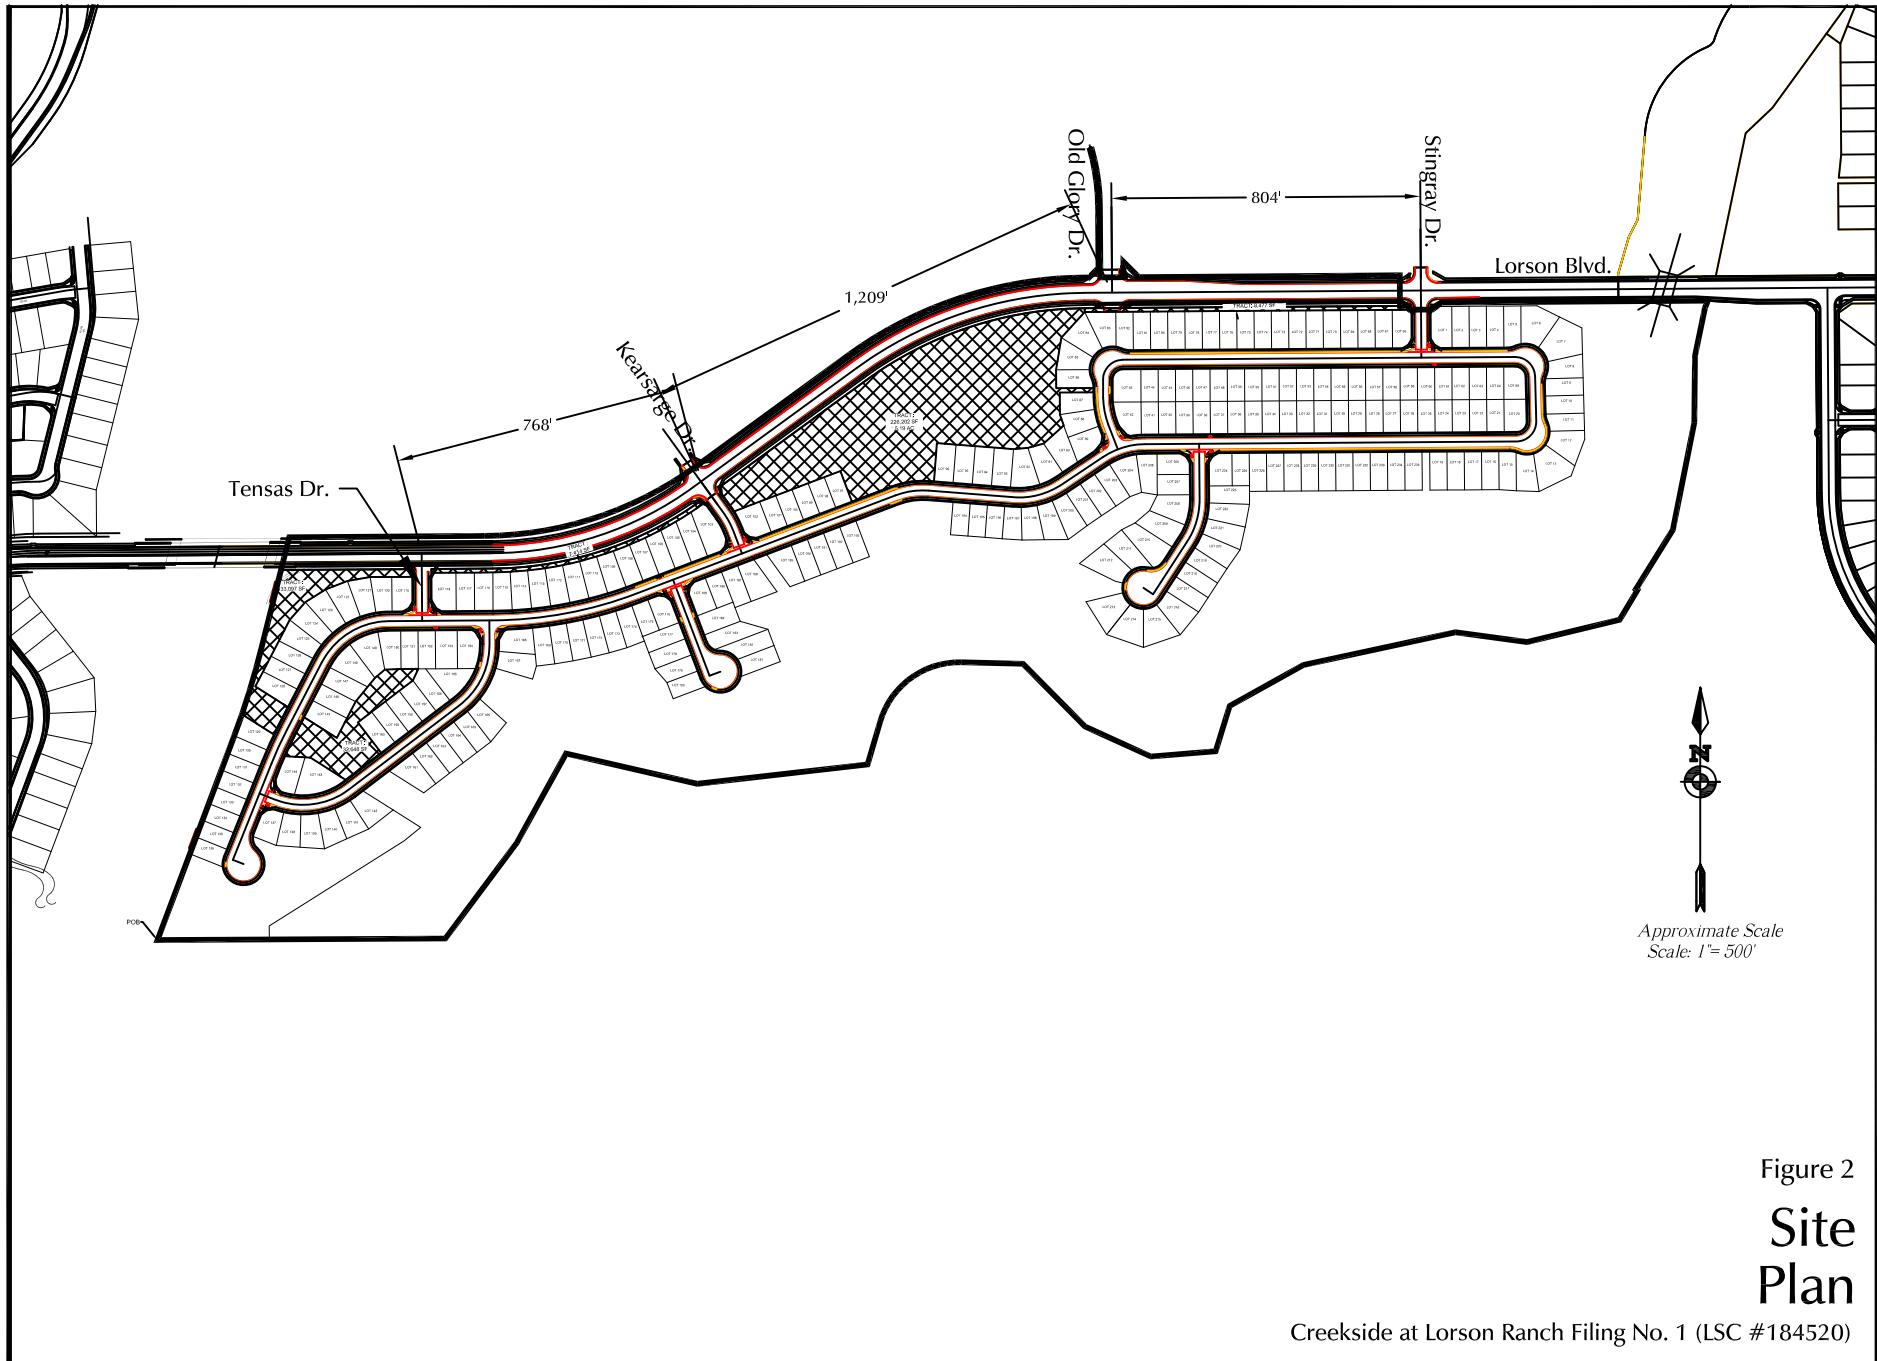


Figure 2

Site Plan

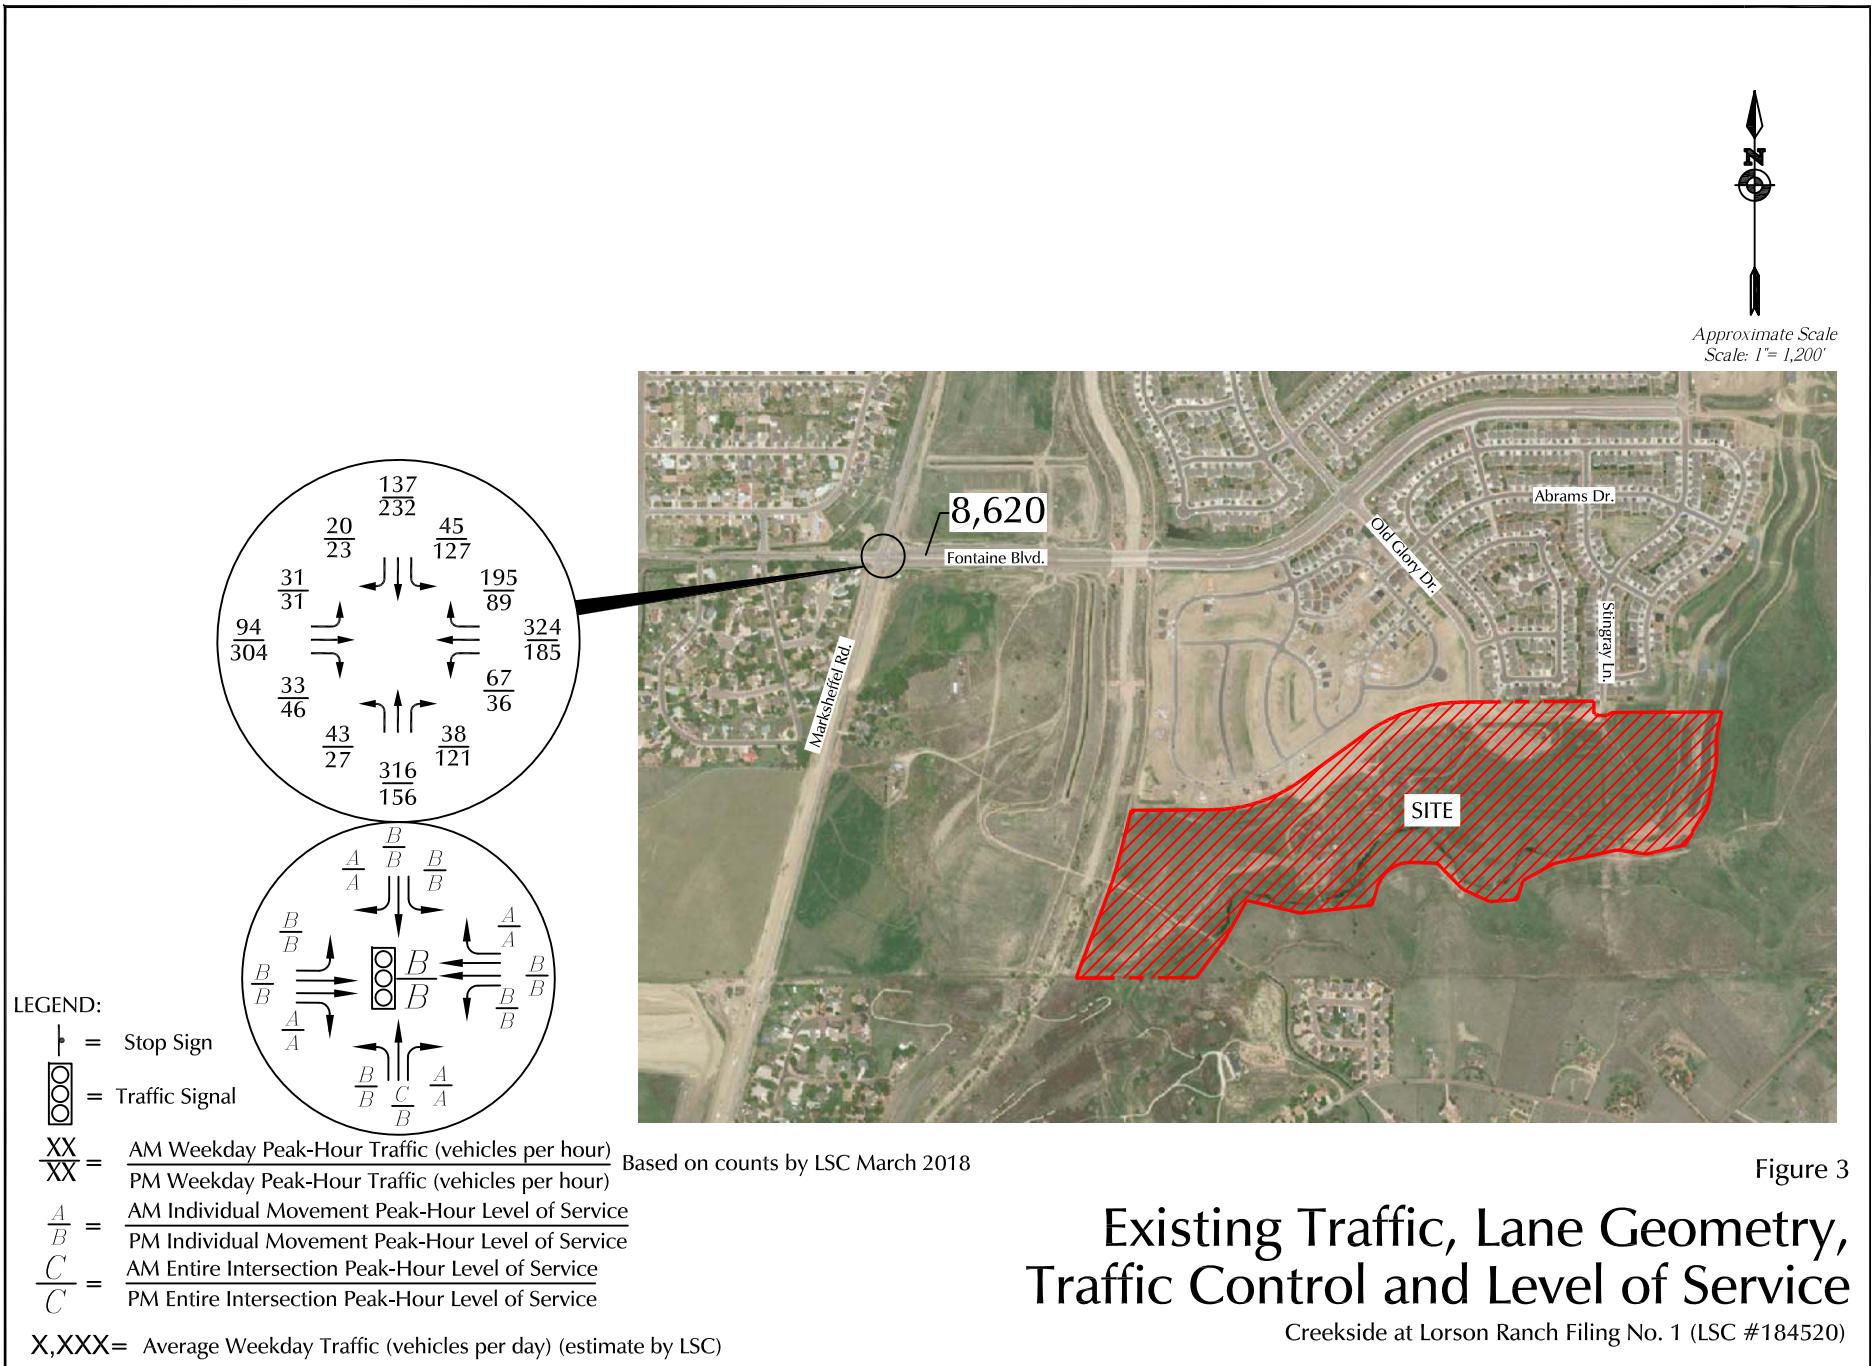

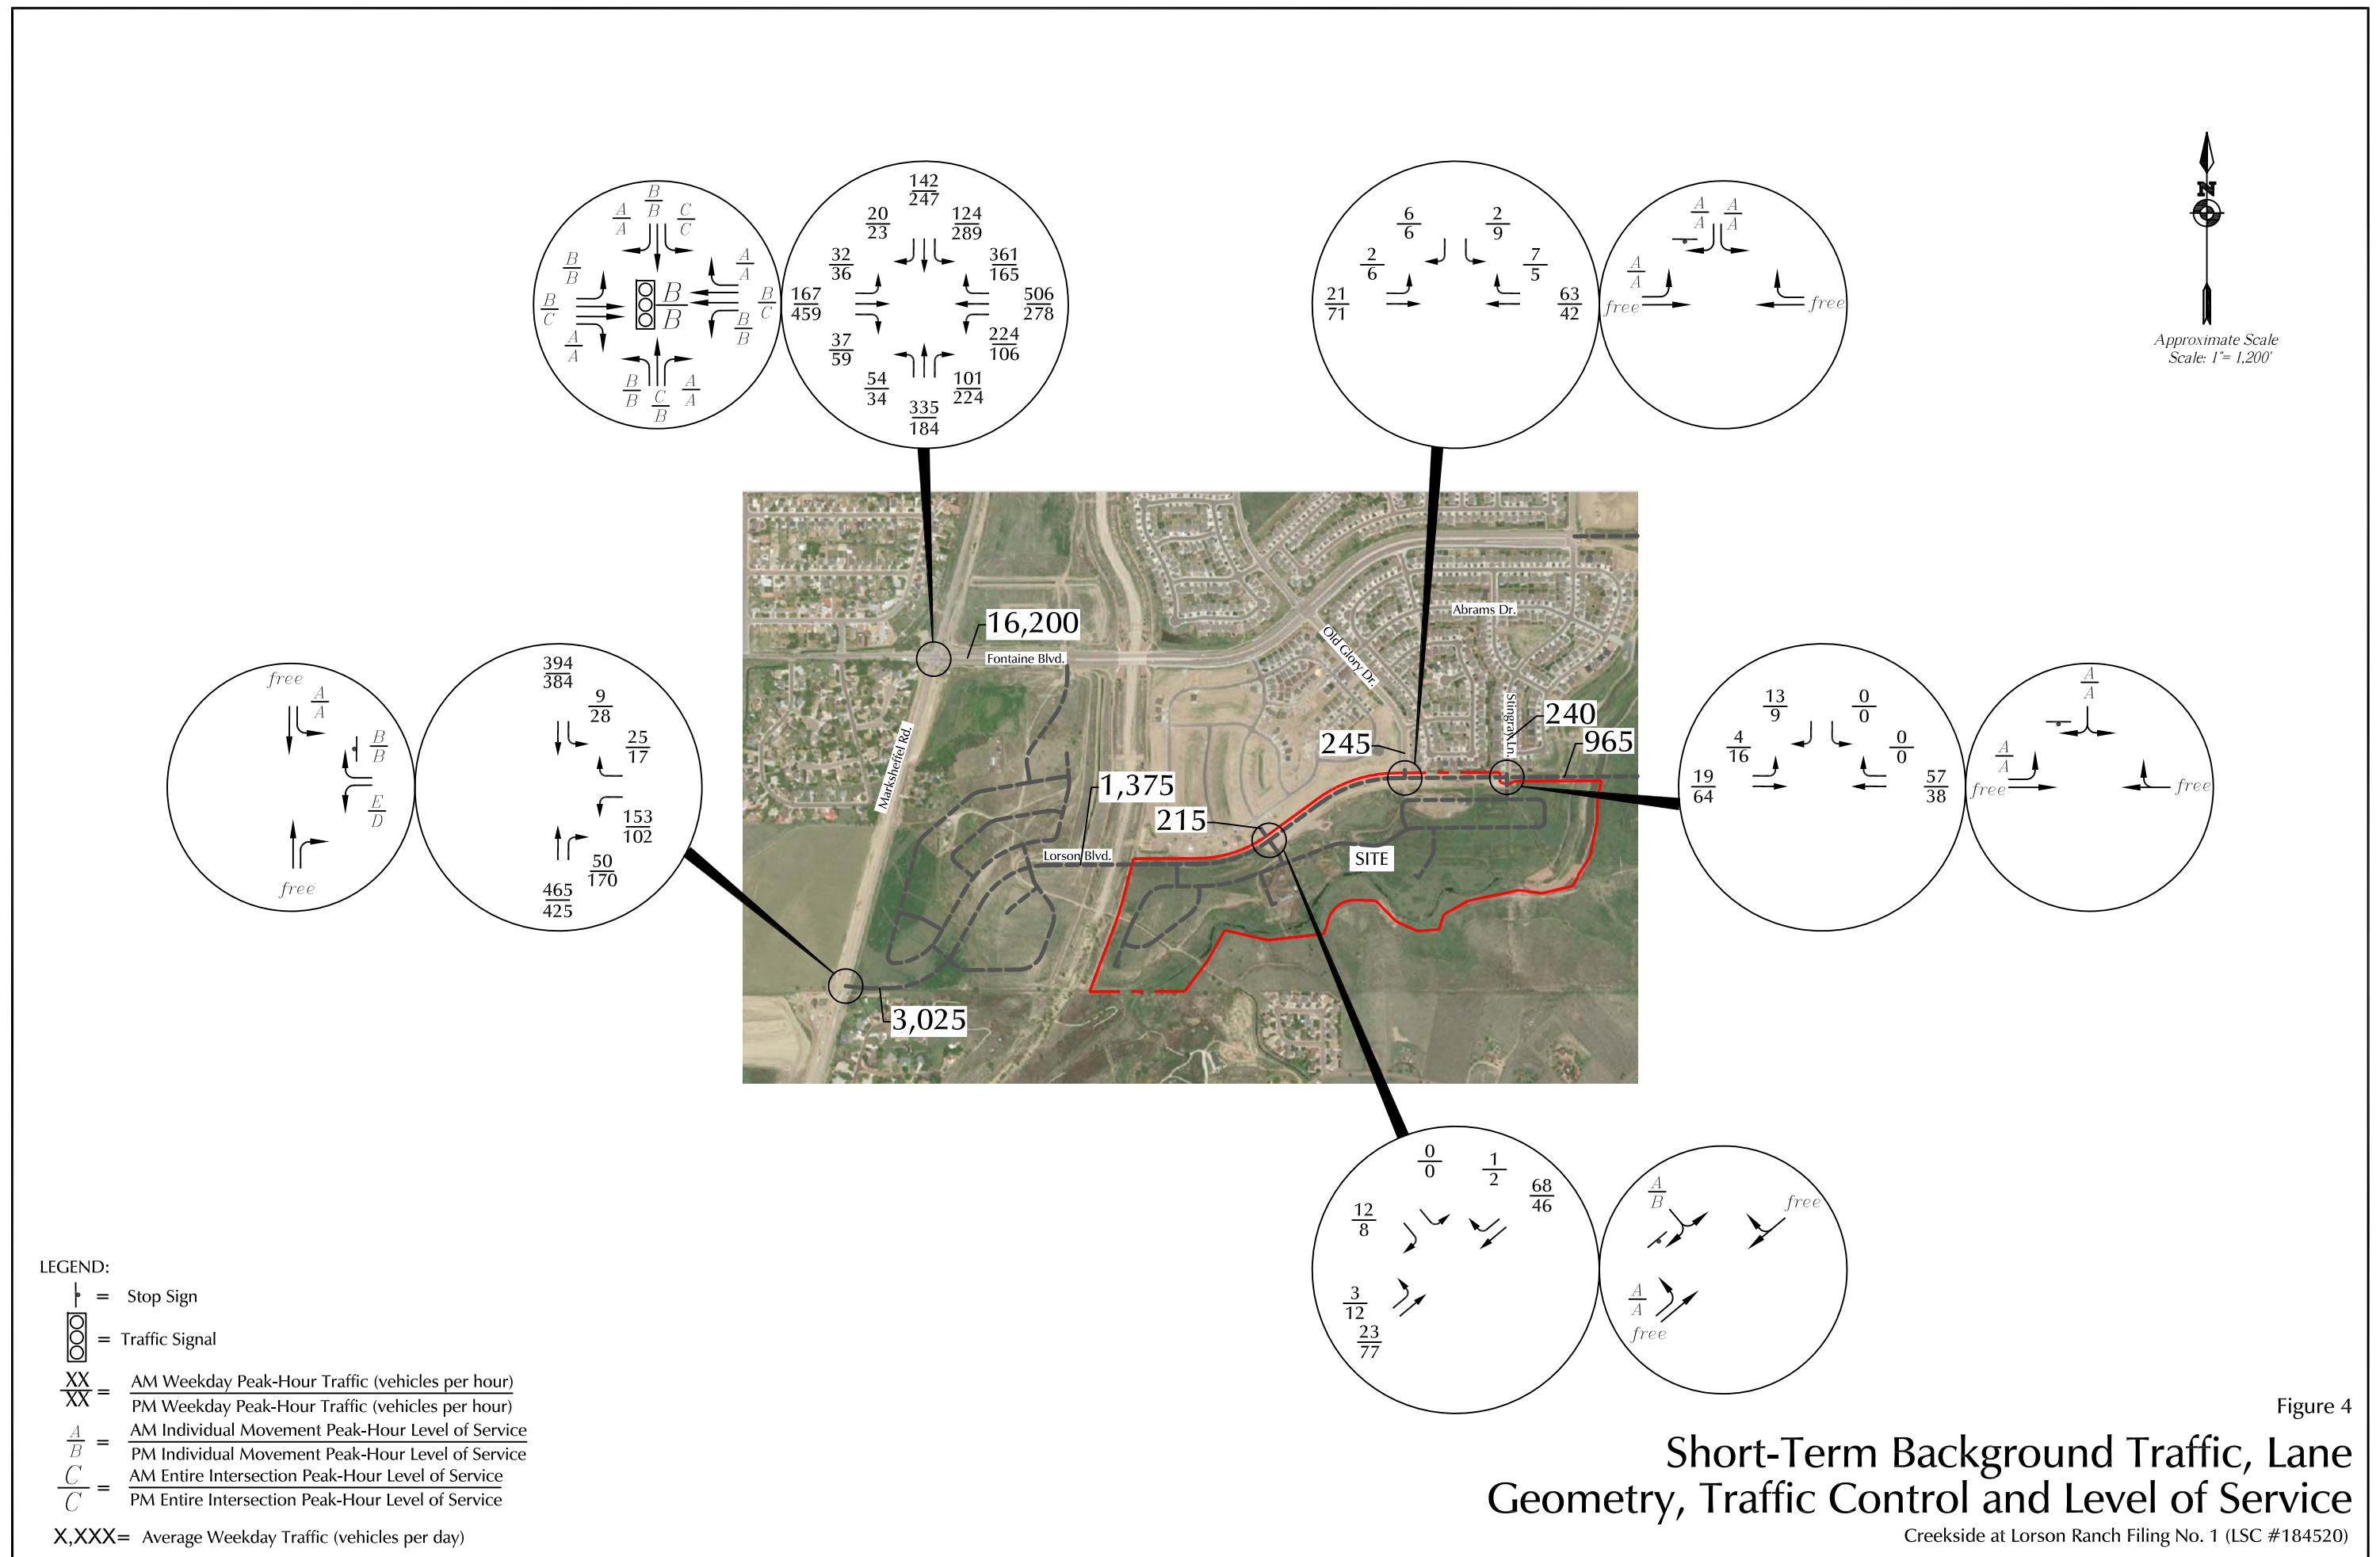

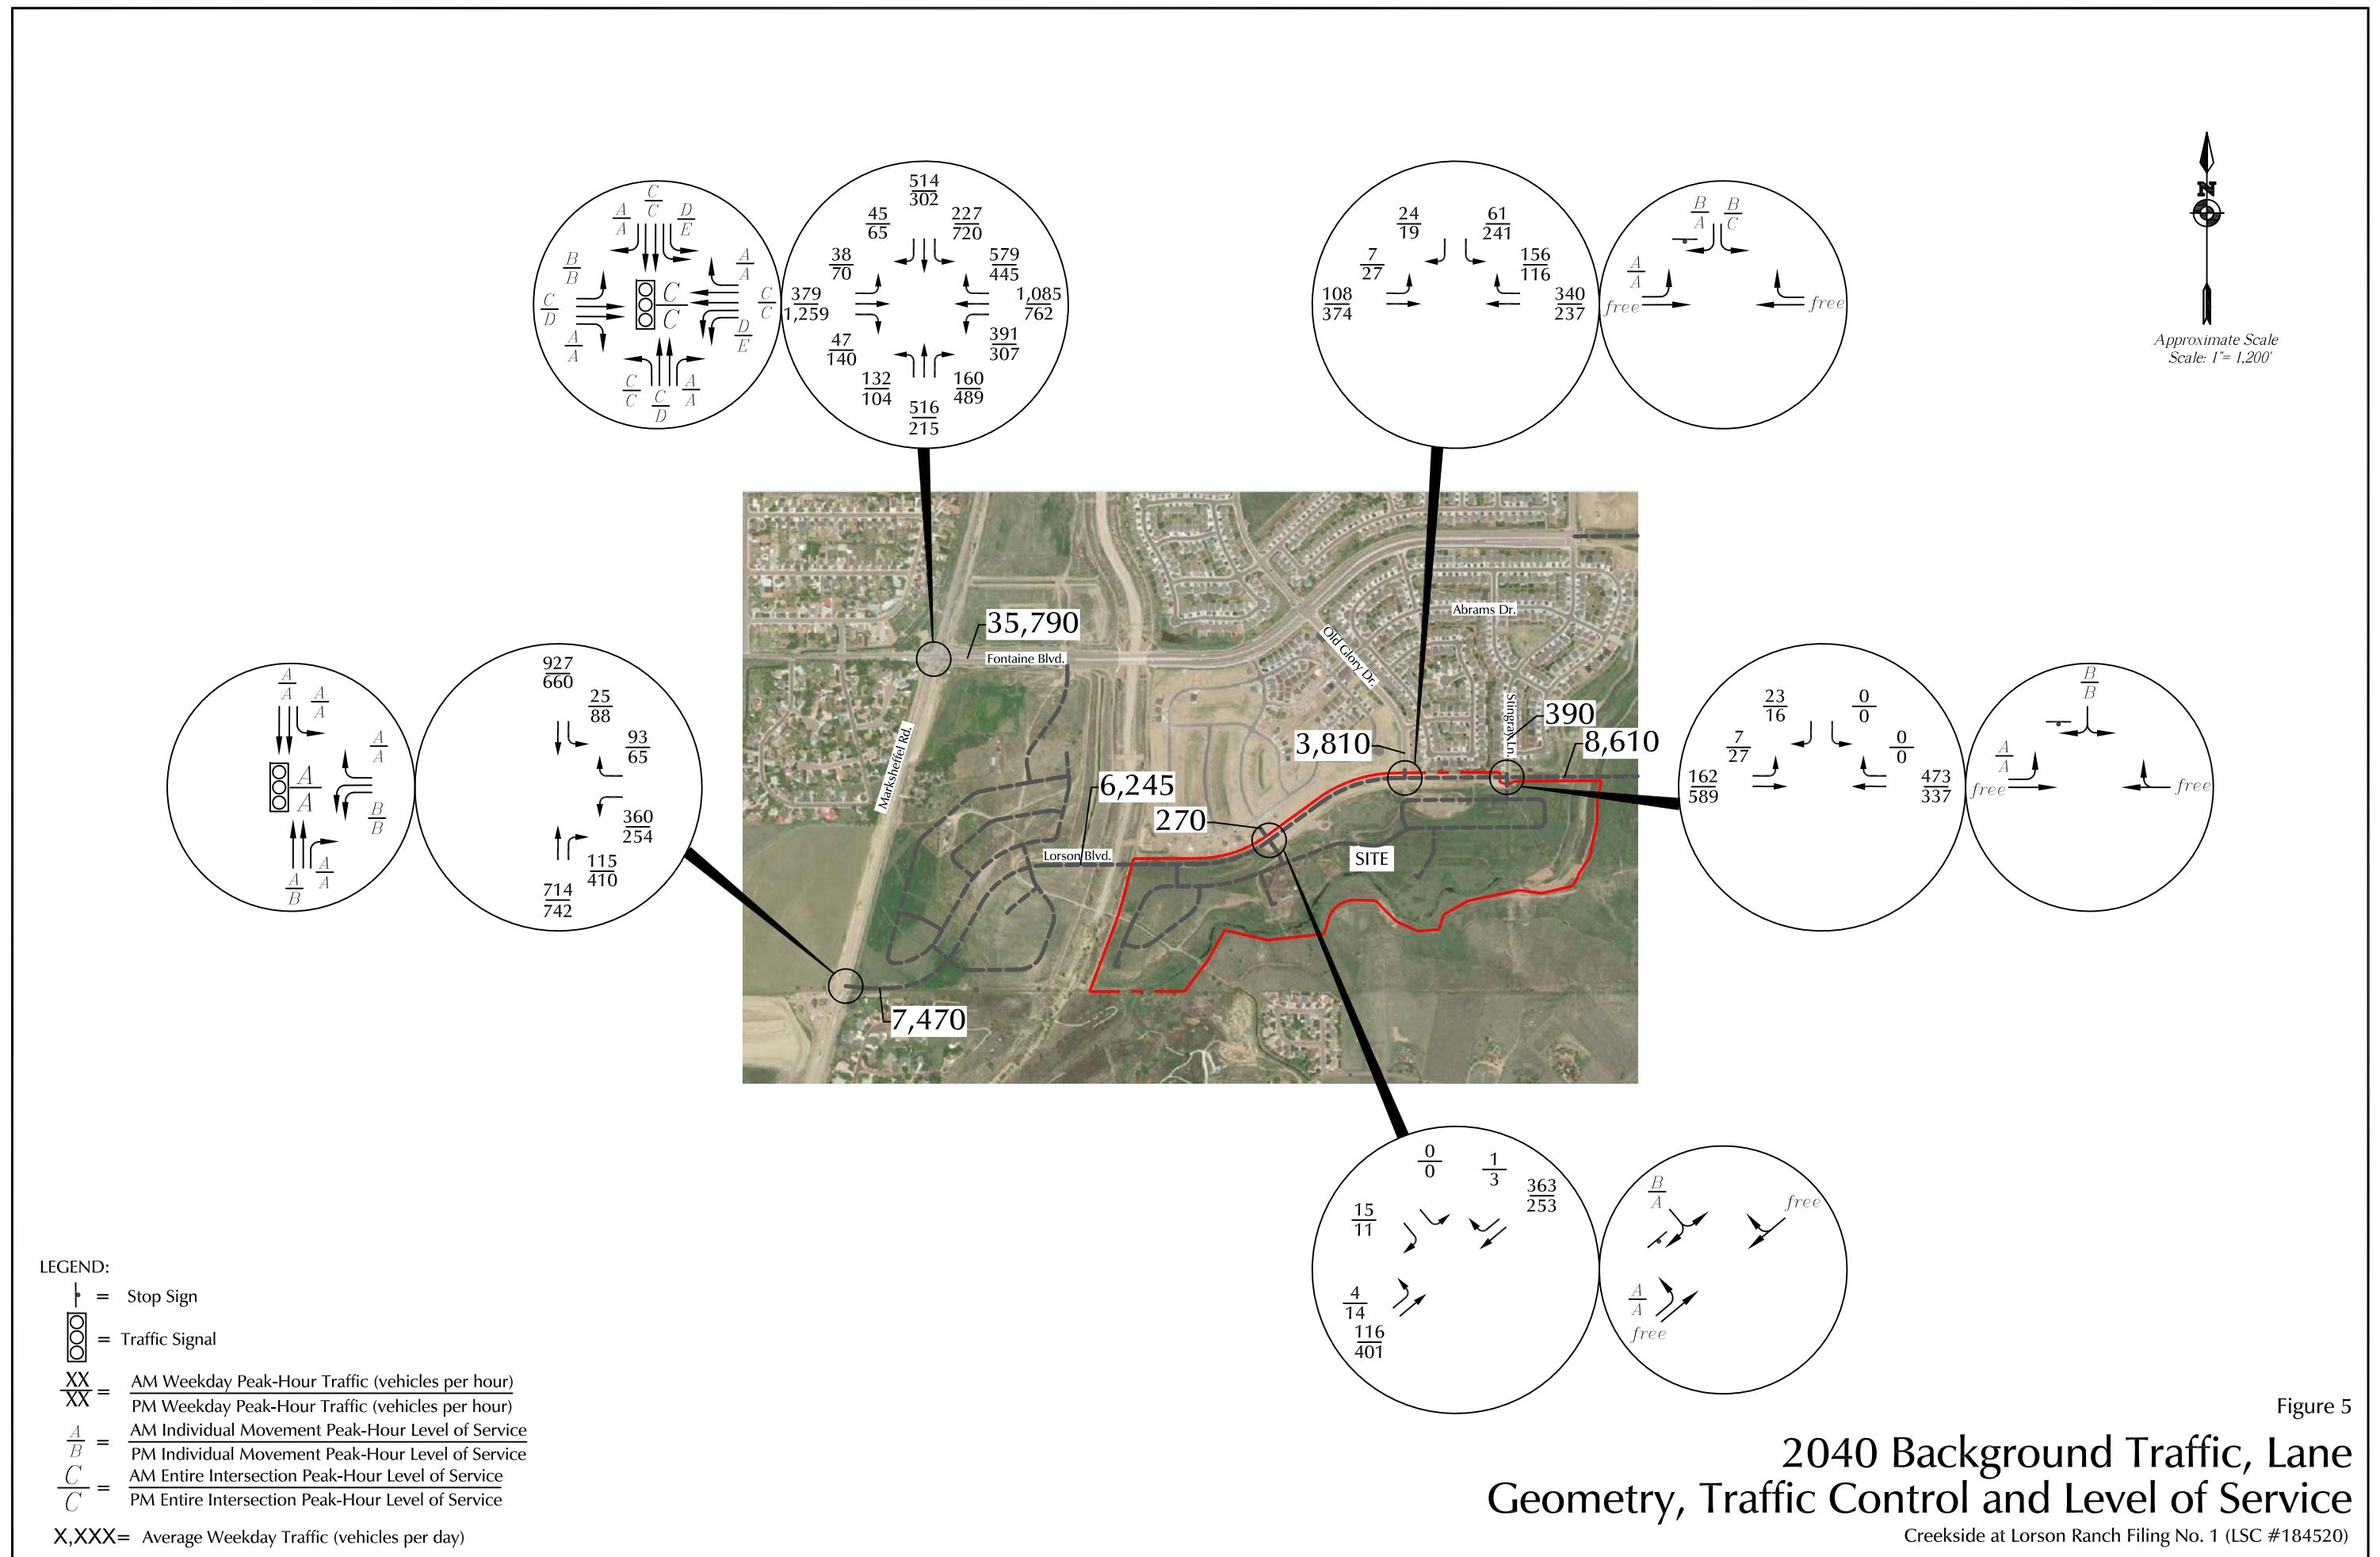




LEGEND:
 XX% = Percent Directional Distribution

Figure 6
**Directional Distribution
of Site-Generated Traffic**
 Creekside at Lorson Ranch Filing No. 1 (LSC #184520)



Approximate Scale
Scale: 1" = 1,200'

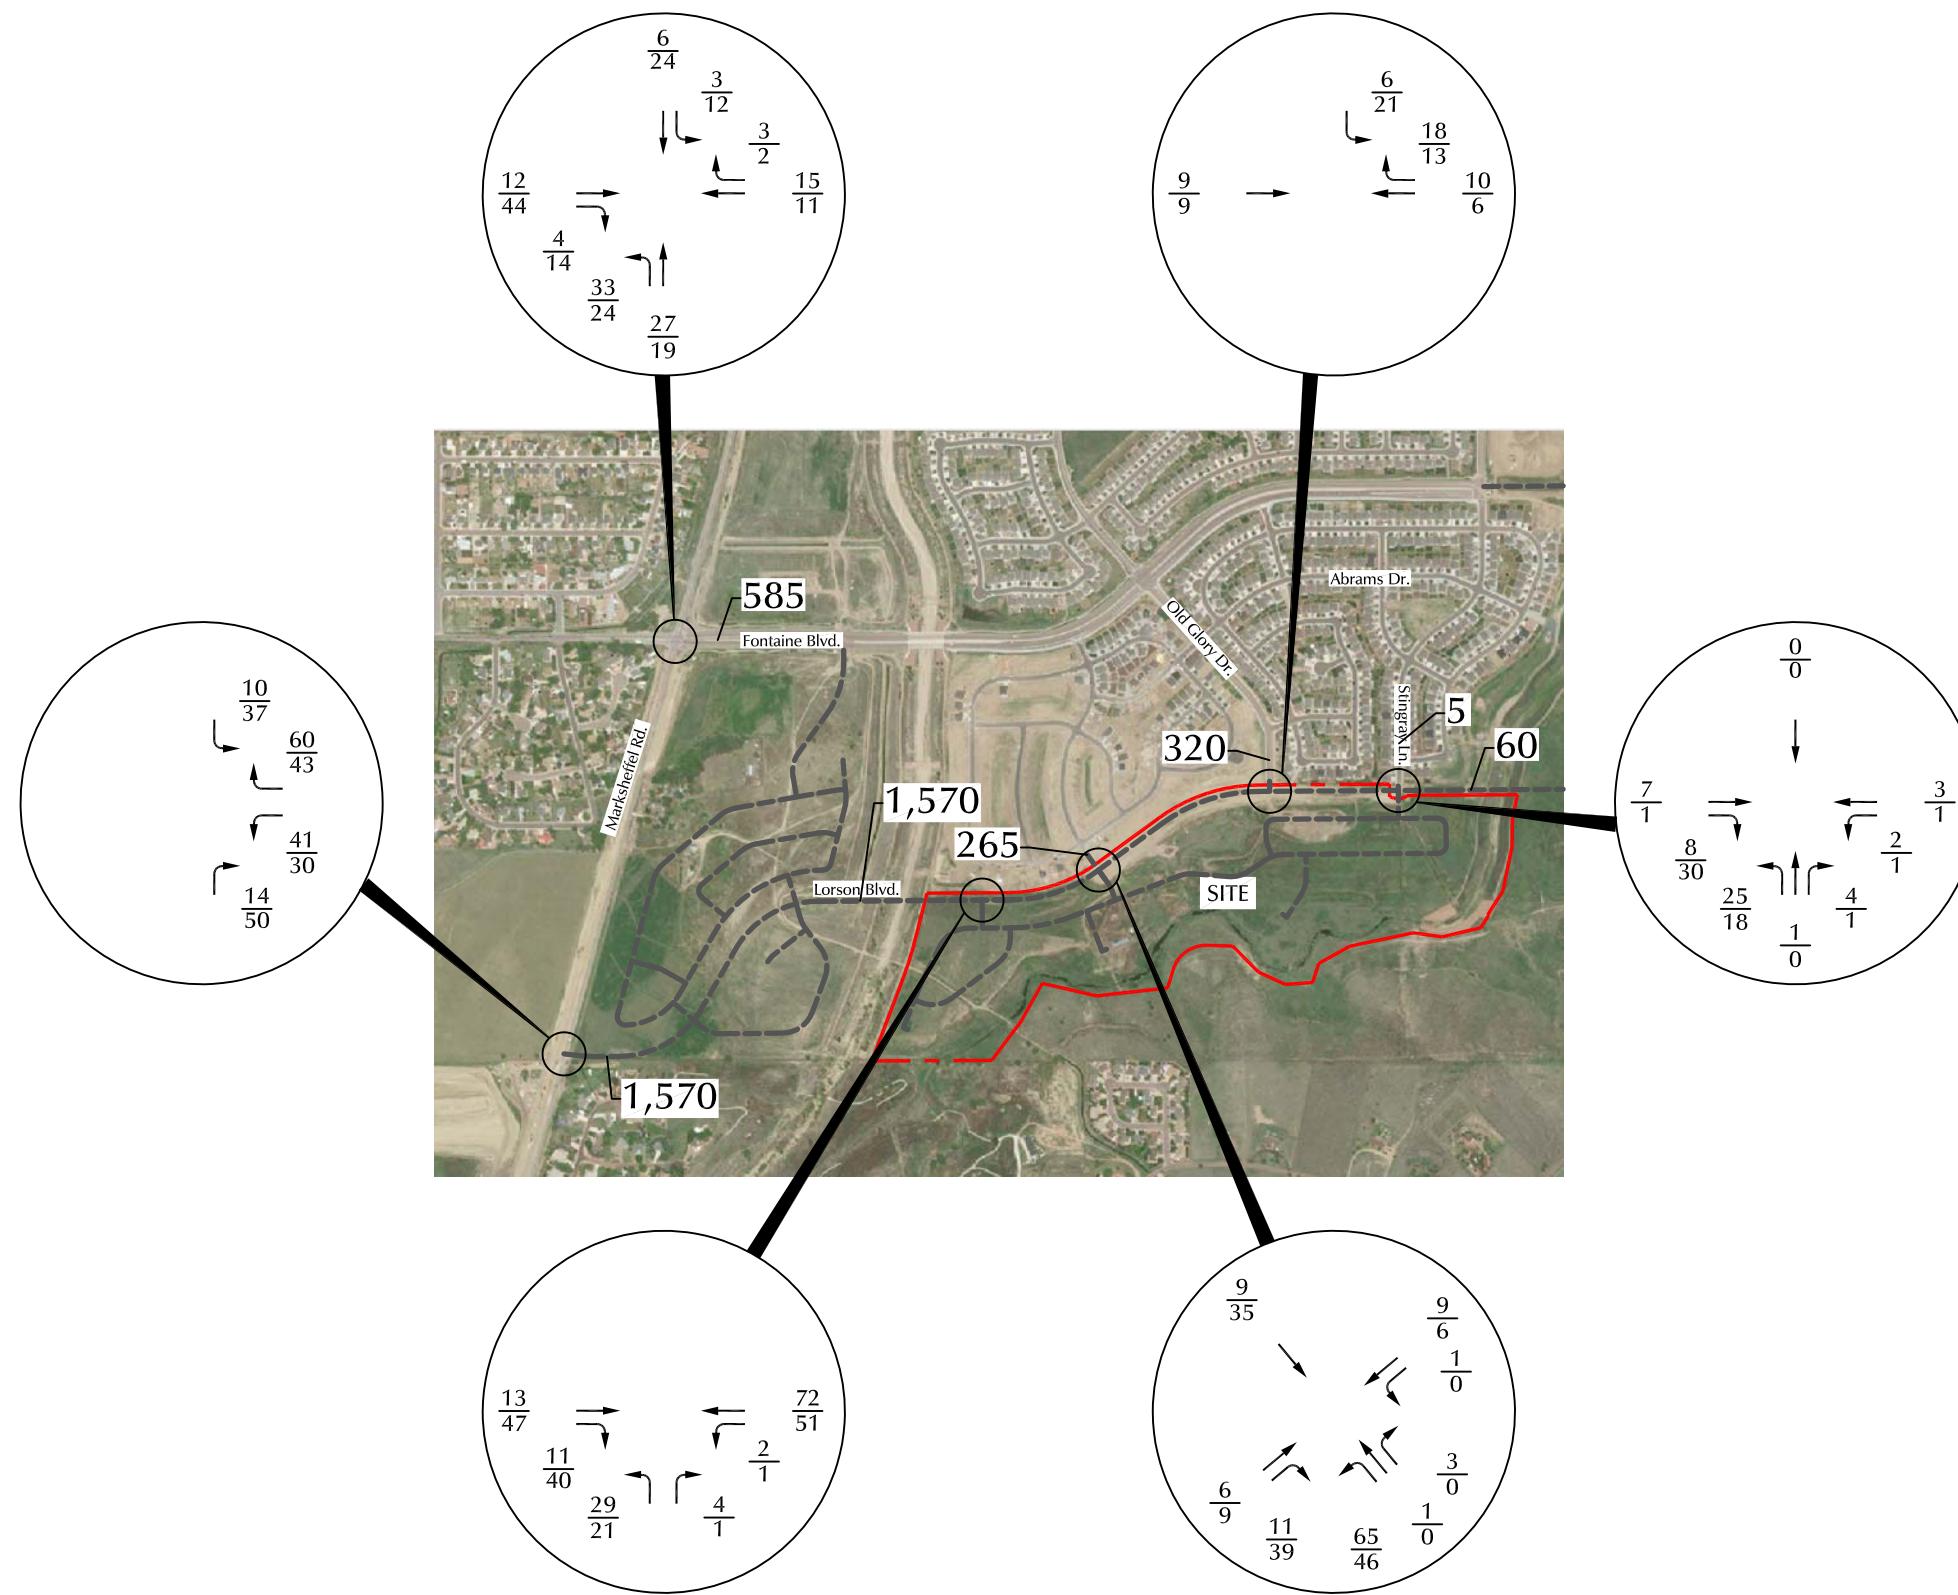

LEGEND:
 $\frac{XX}{XX} = \frac{\text{AM Weekday Peak-Hour Traffic (vehicles per hour)}}{\text{PM Weekday Peak-Hour Traffic (vehicles per hour)}}$
 XXX = Average Weekday Traffic (vehicles per day)

Figure 7
Assignment of Short-Term Site-Generated Traffic
 Creekside at Lorson Ranch Filing No. 1 (LSC #184520)



Approximate Scale
Scale: 1" = 1,200'

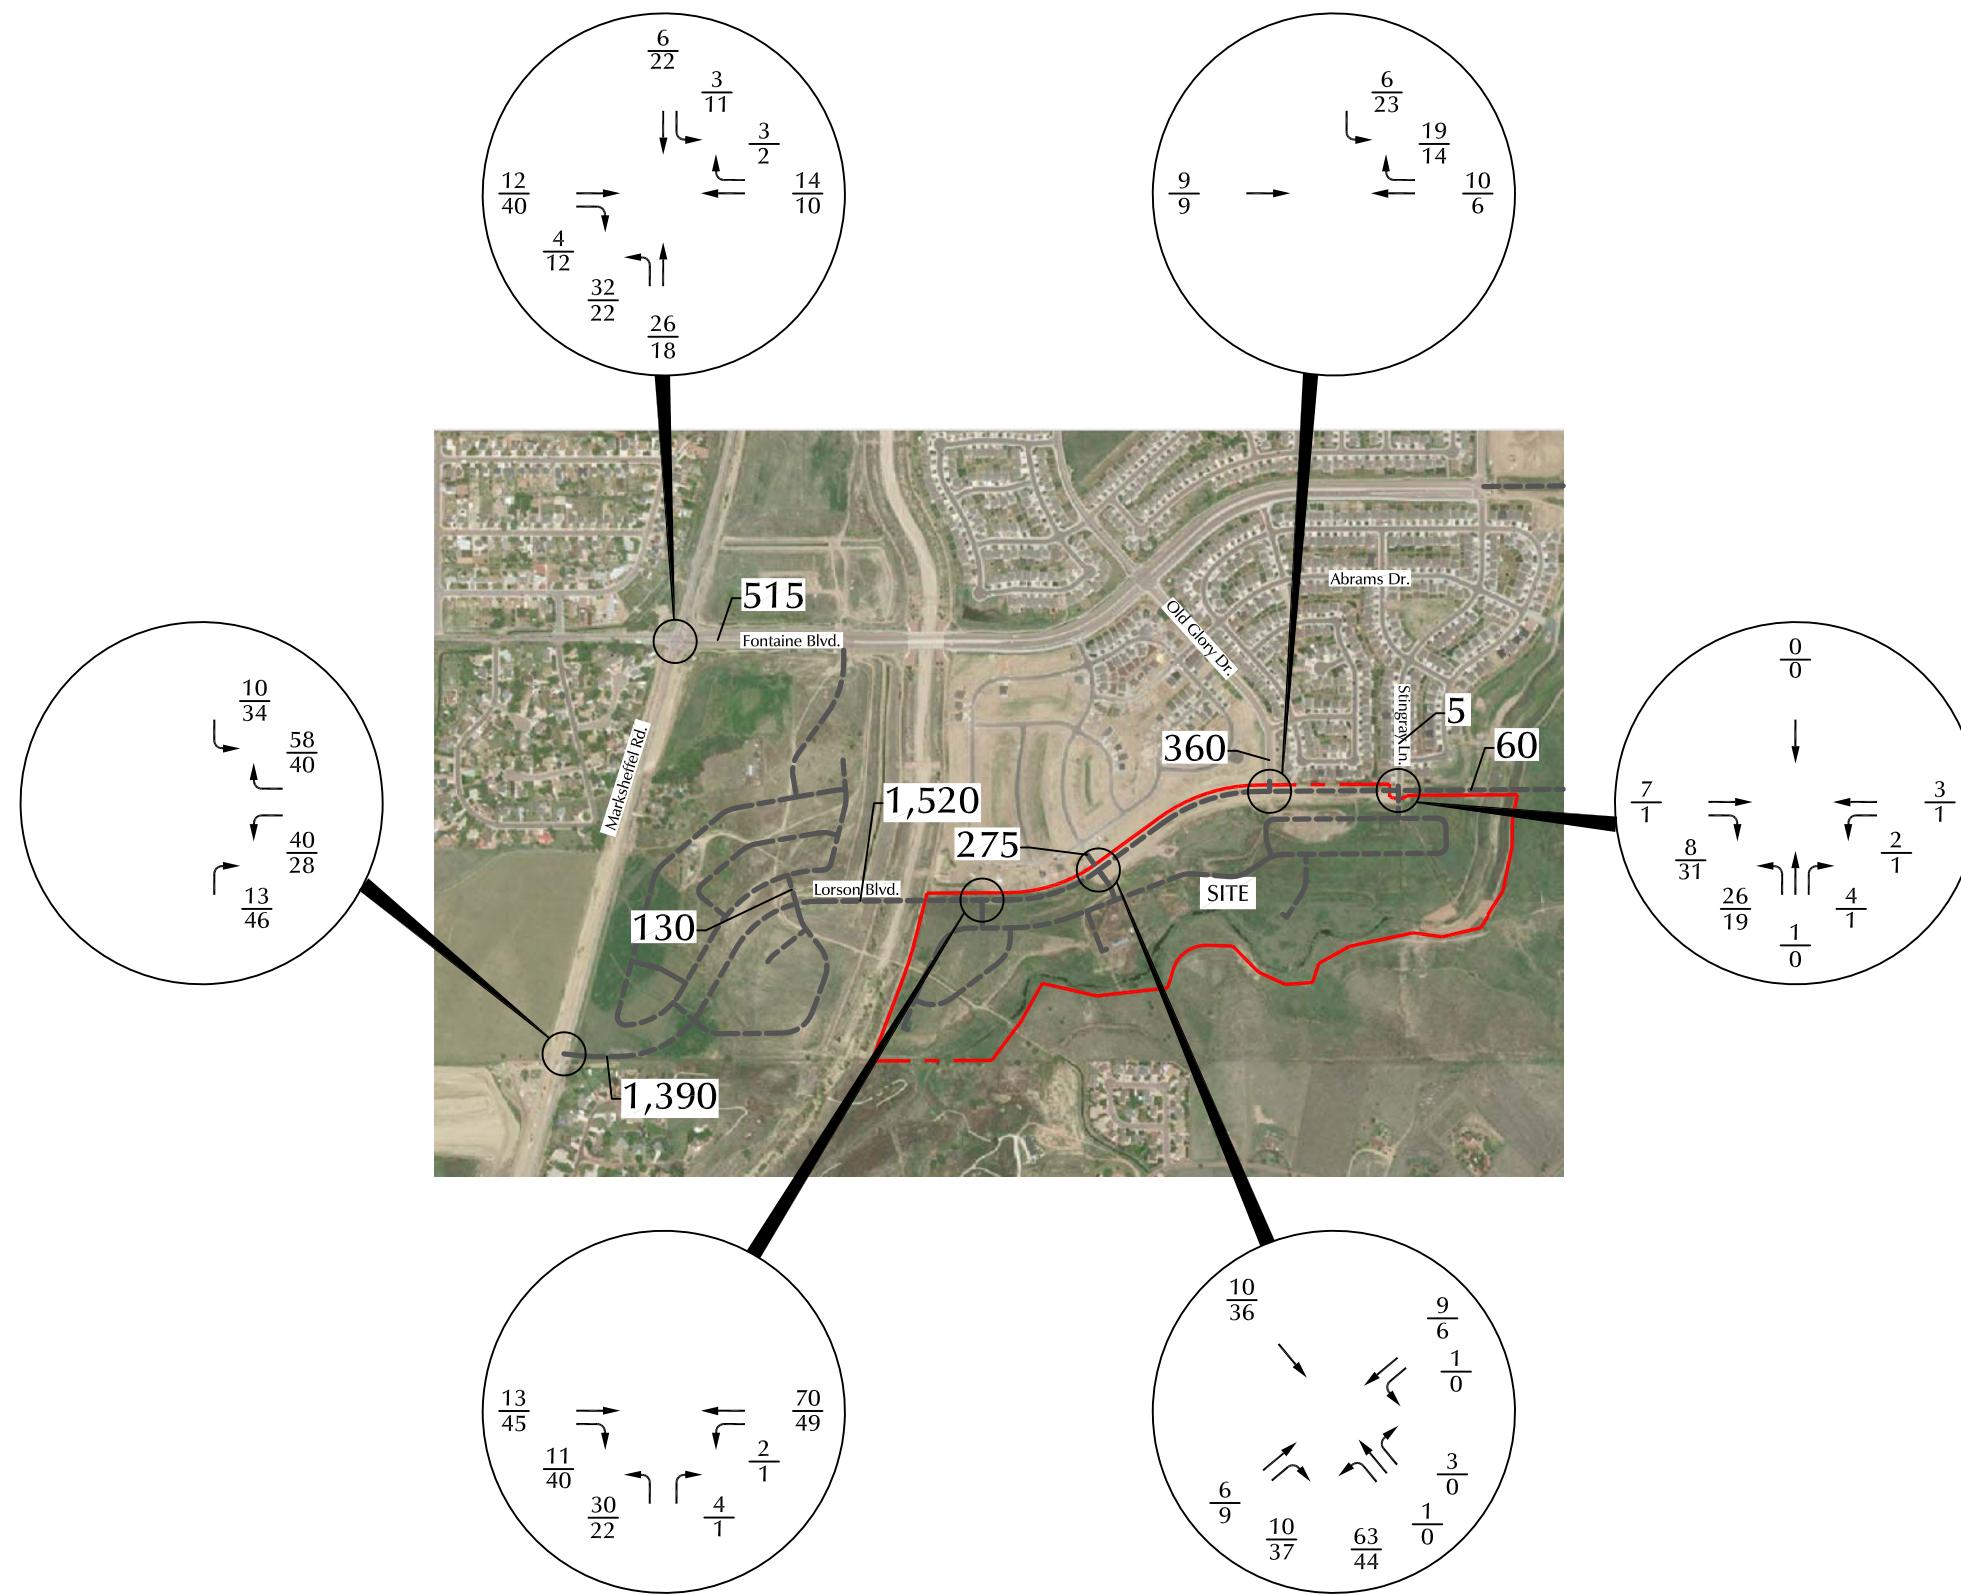
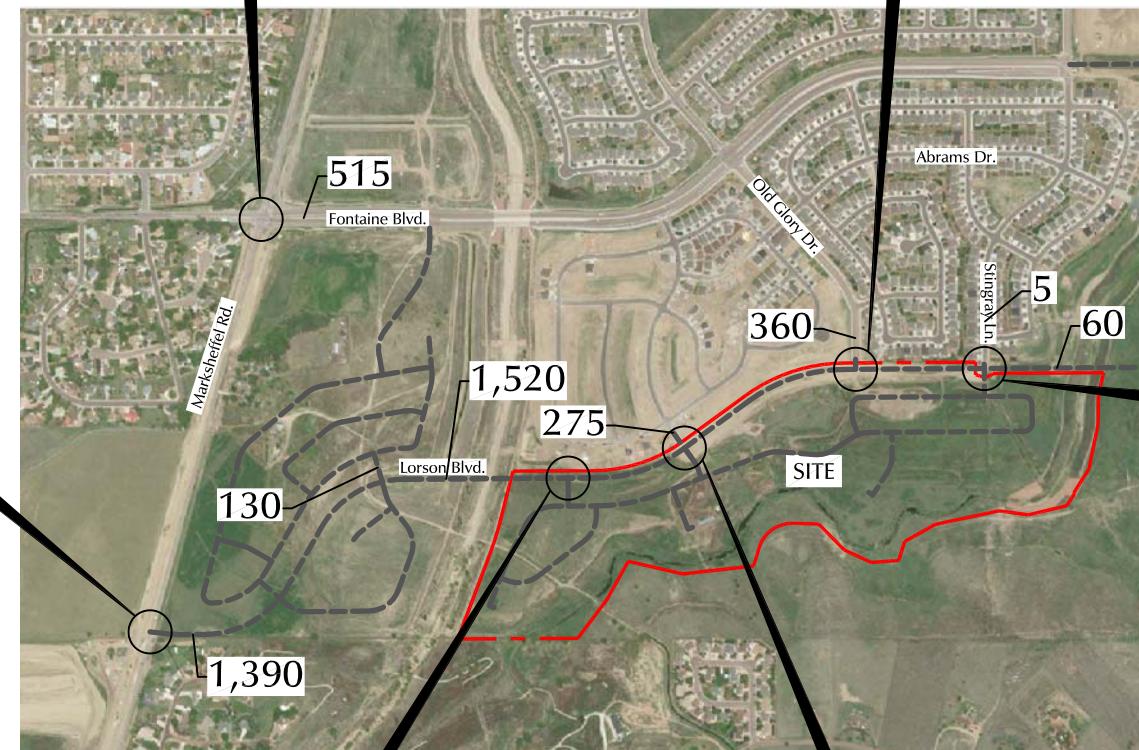


Figure 8

Assignment of 2040 Site-Generated Traffic

Creekside at Lorson Ranch Filing No. 1 (LSC #184520)

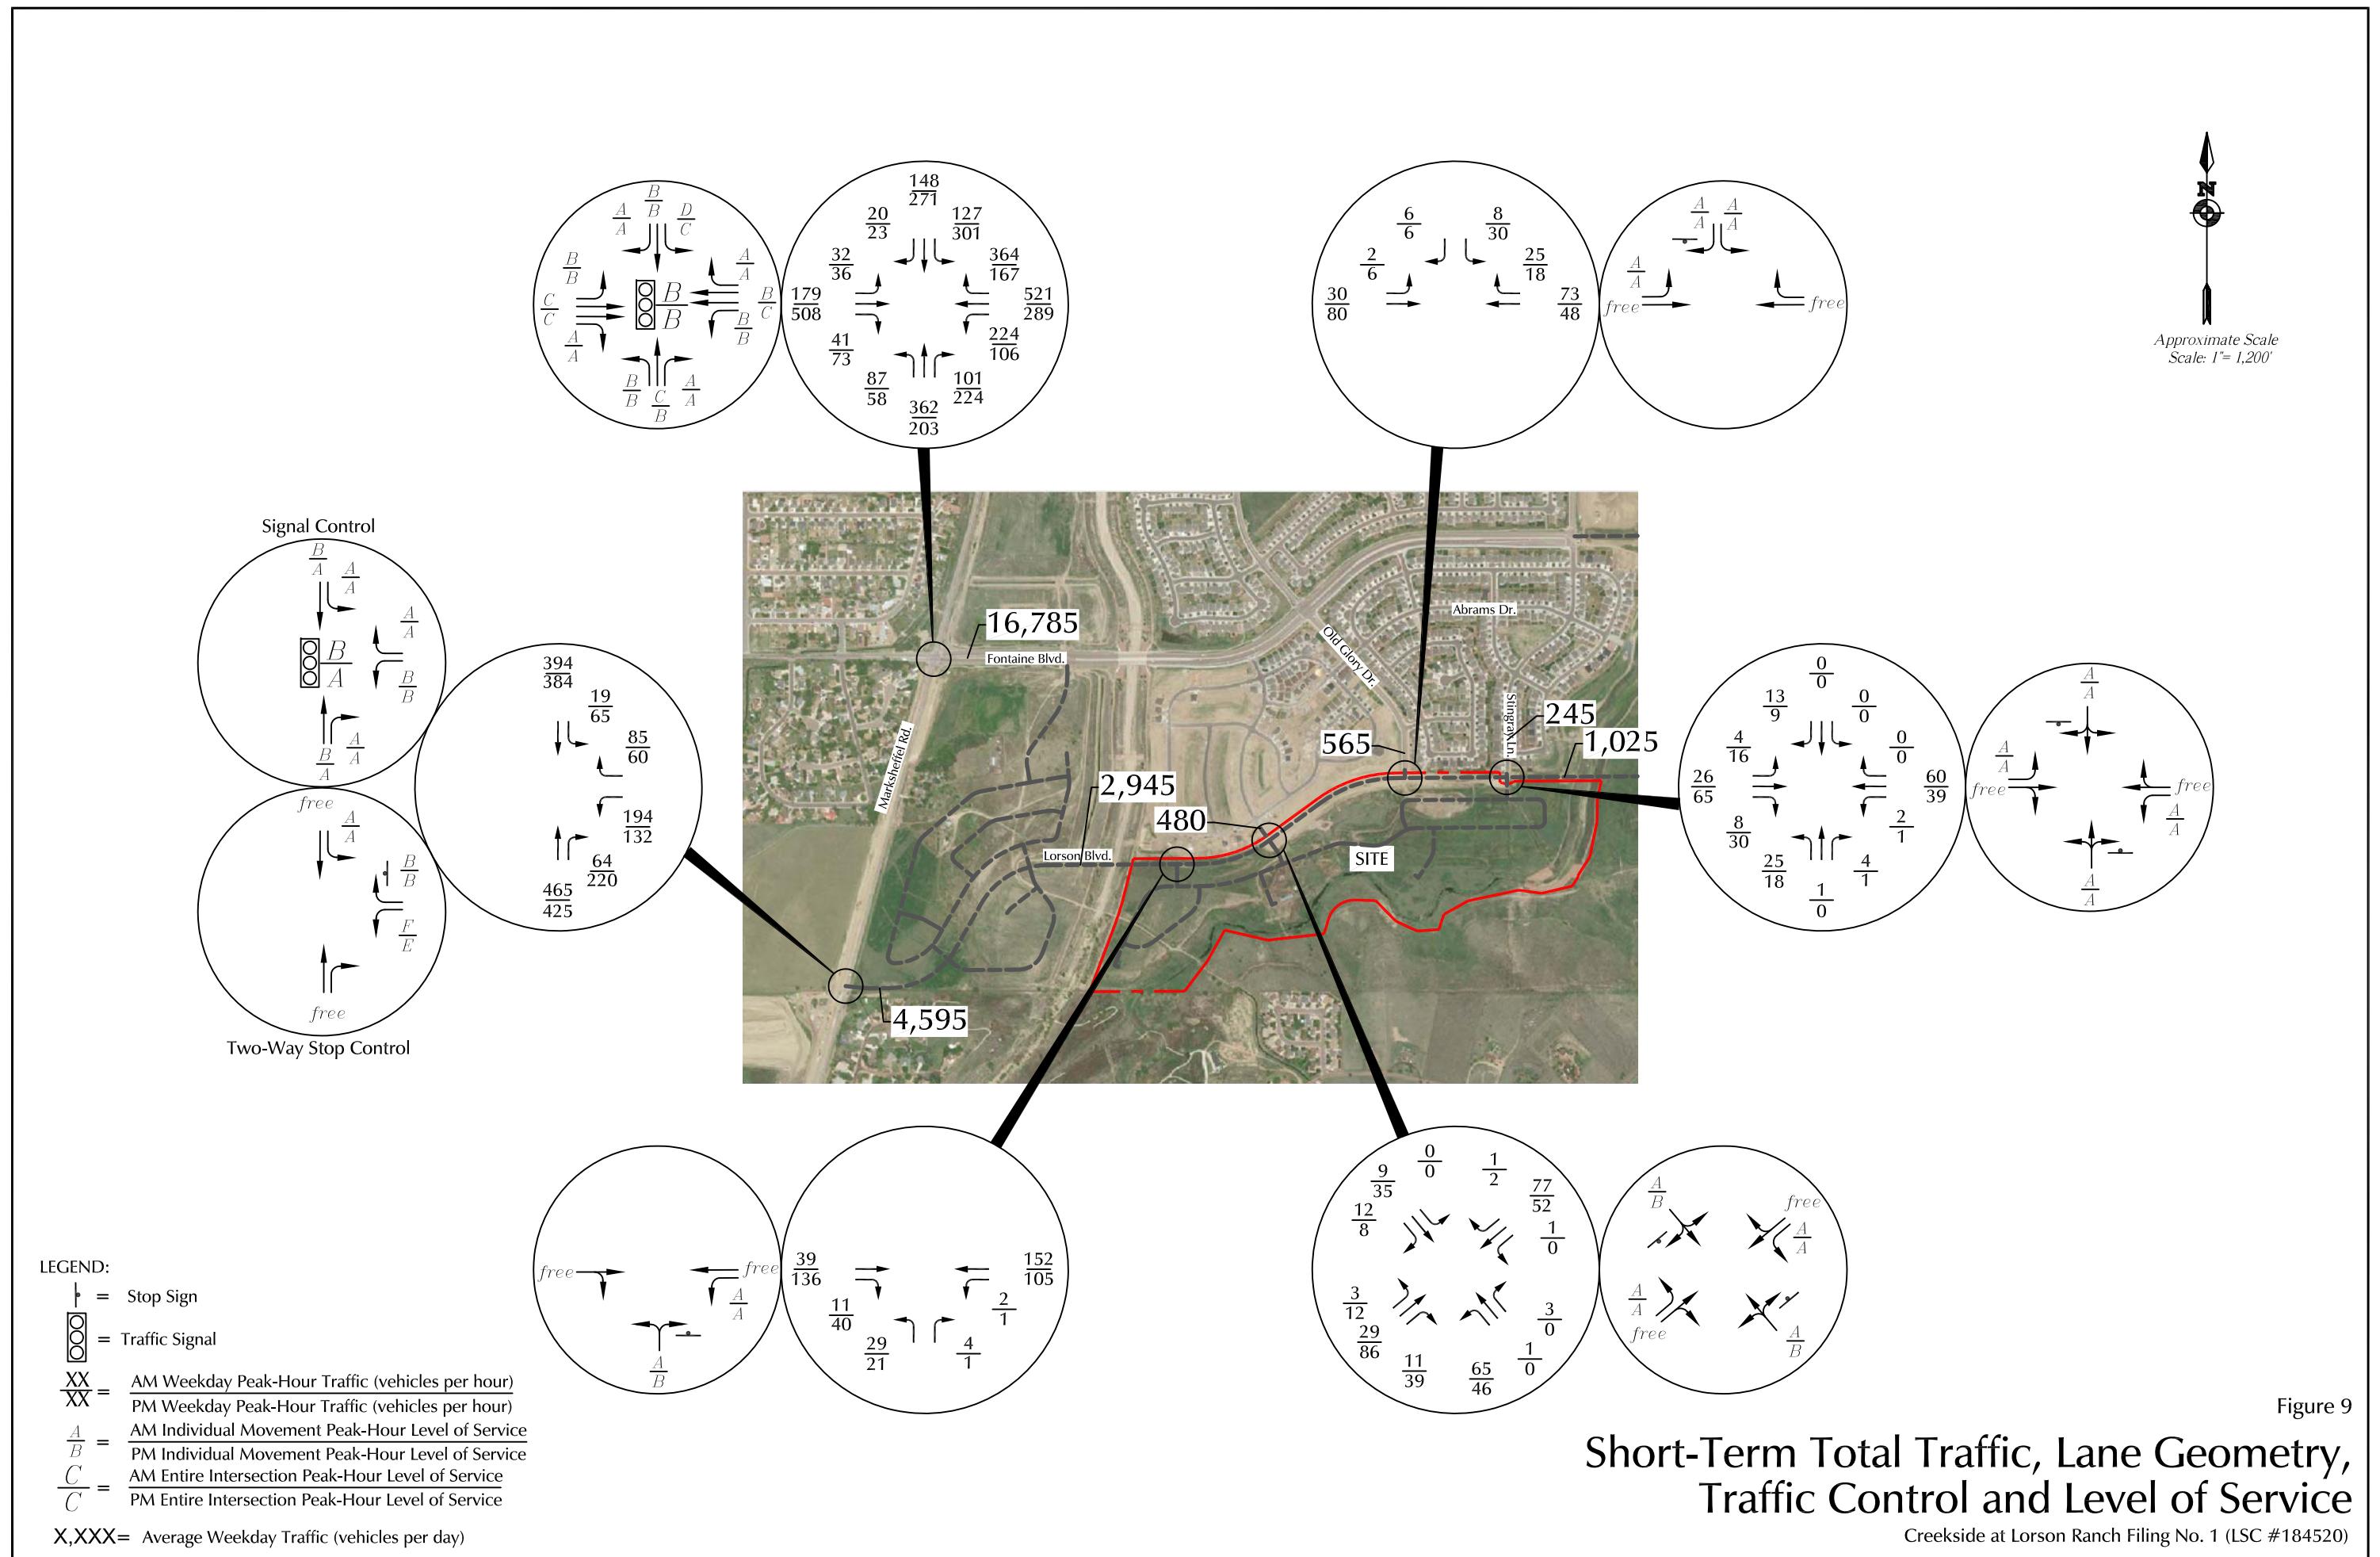


Figure 9


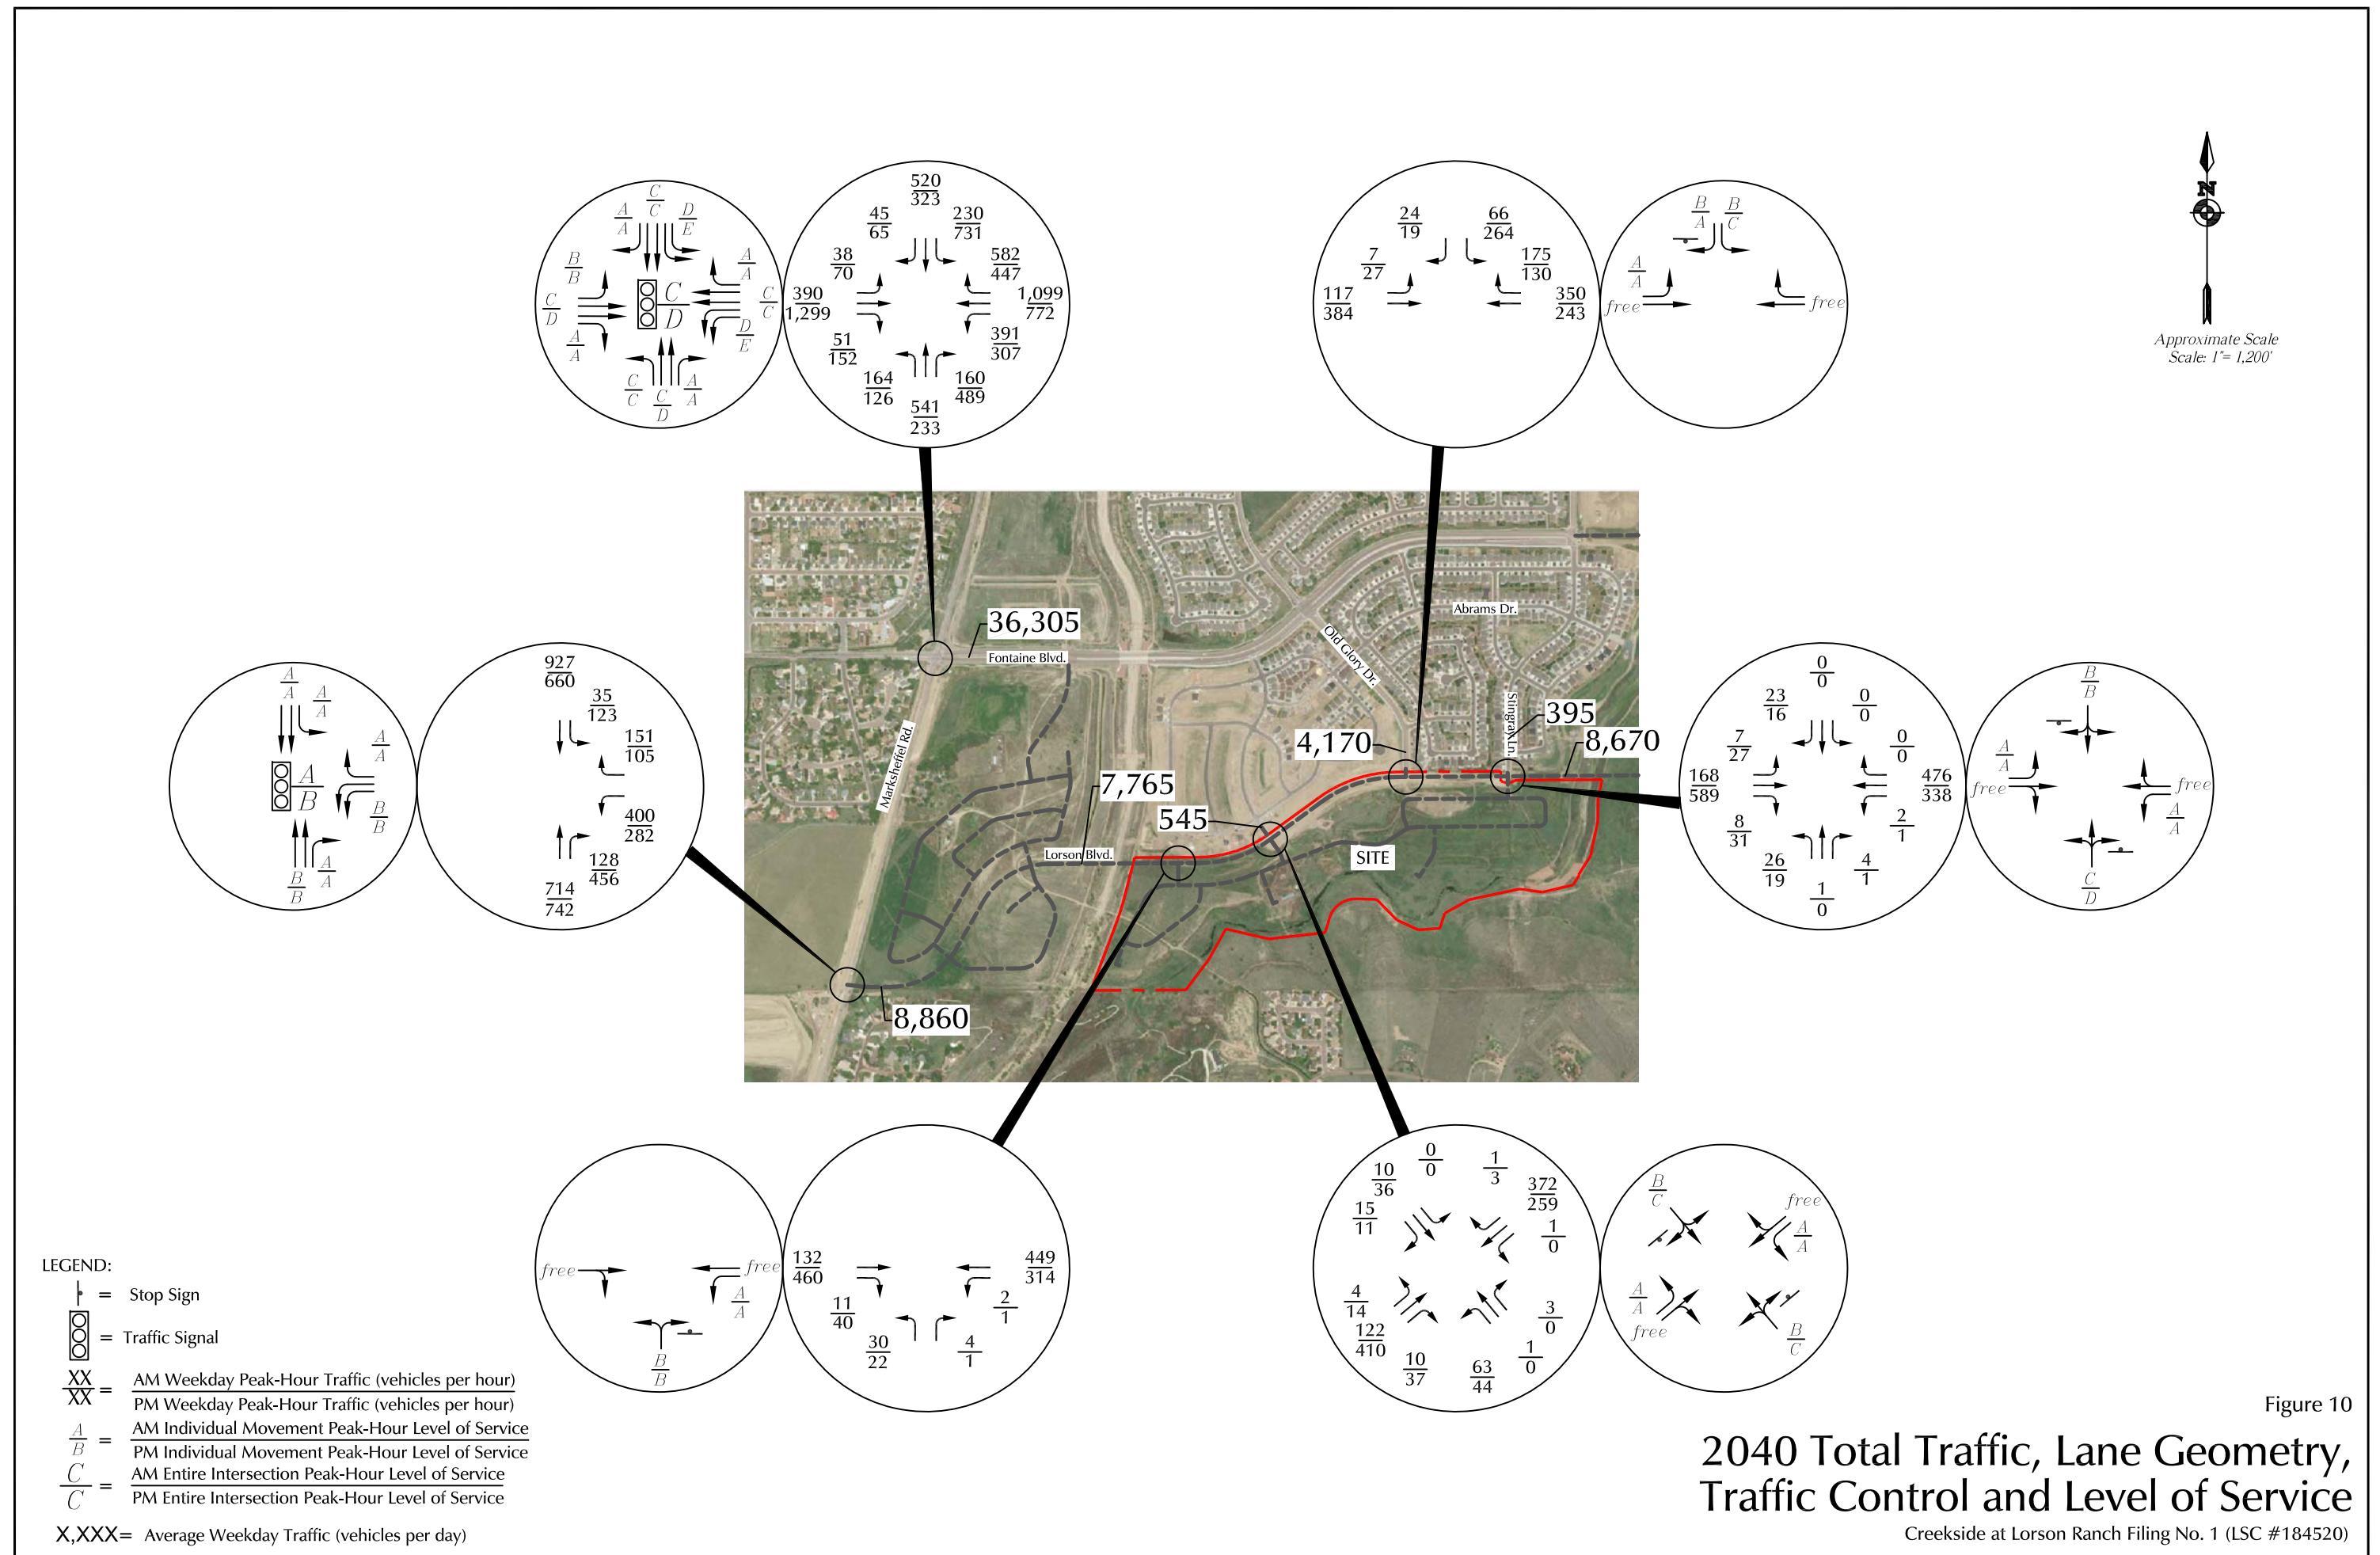



Figure 4C-2. Warrant 2 Four-Hour Vehicular Volume (70% Factor)
 (Community Less than 10,000 population or above 40 mph on Major Street)

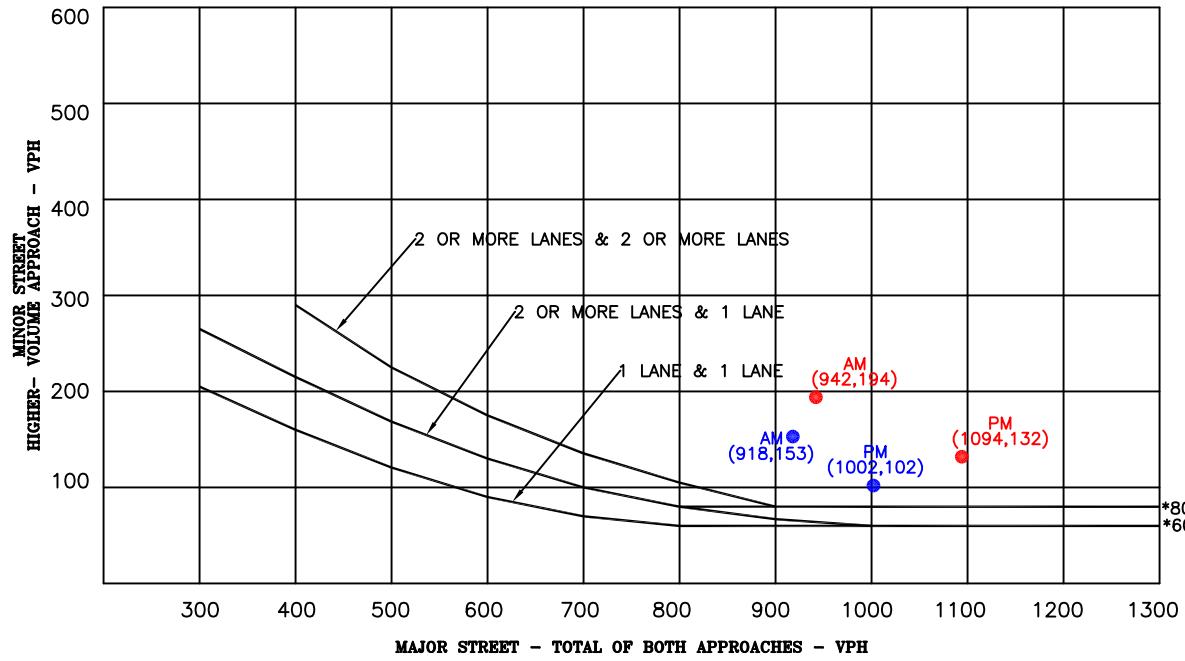

- Short-Term Background Traffic
- Short-Term Total Traffic

Figure 11
Signal Warrant Analysis
Marksheffel/Lorson

Creekside at Lorson Ranch Filing No. 1 (LSC #184520)

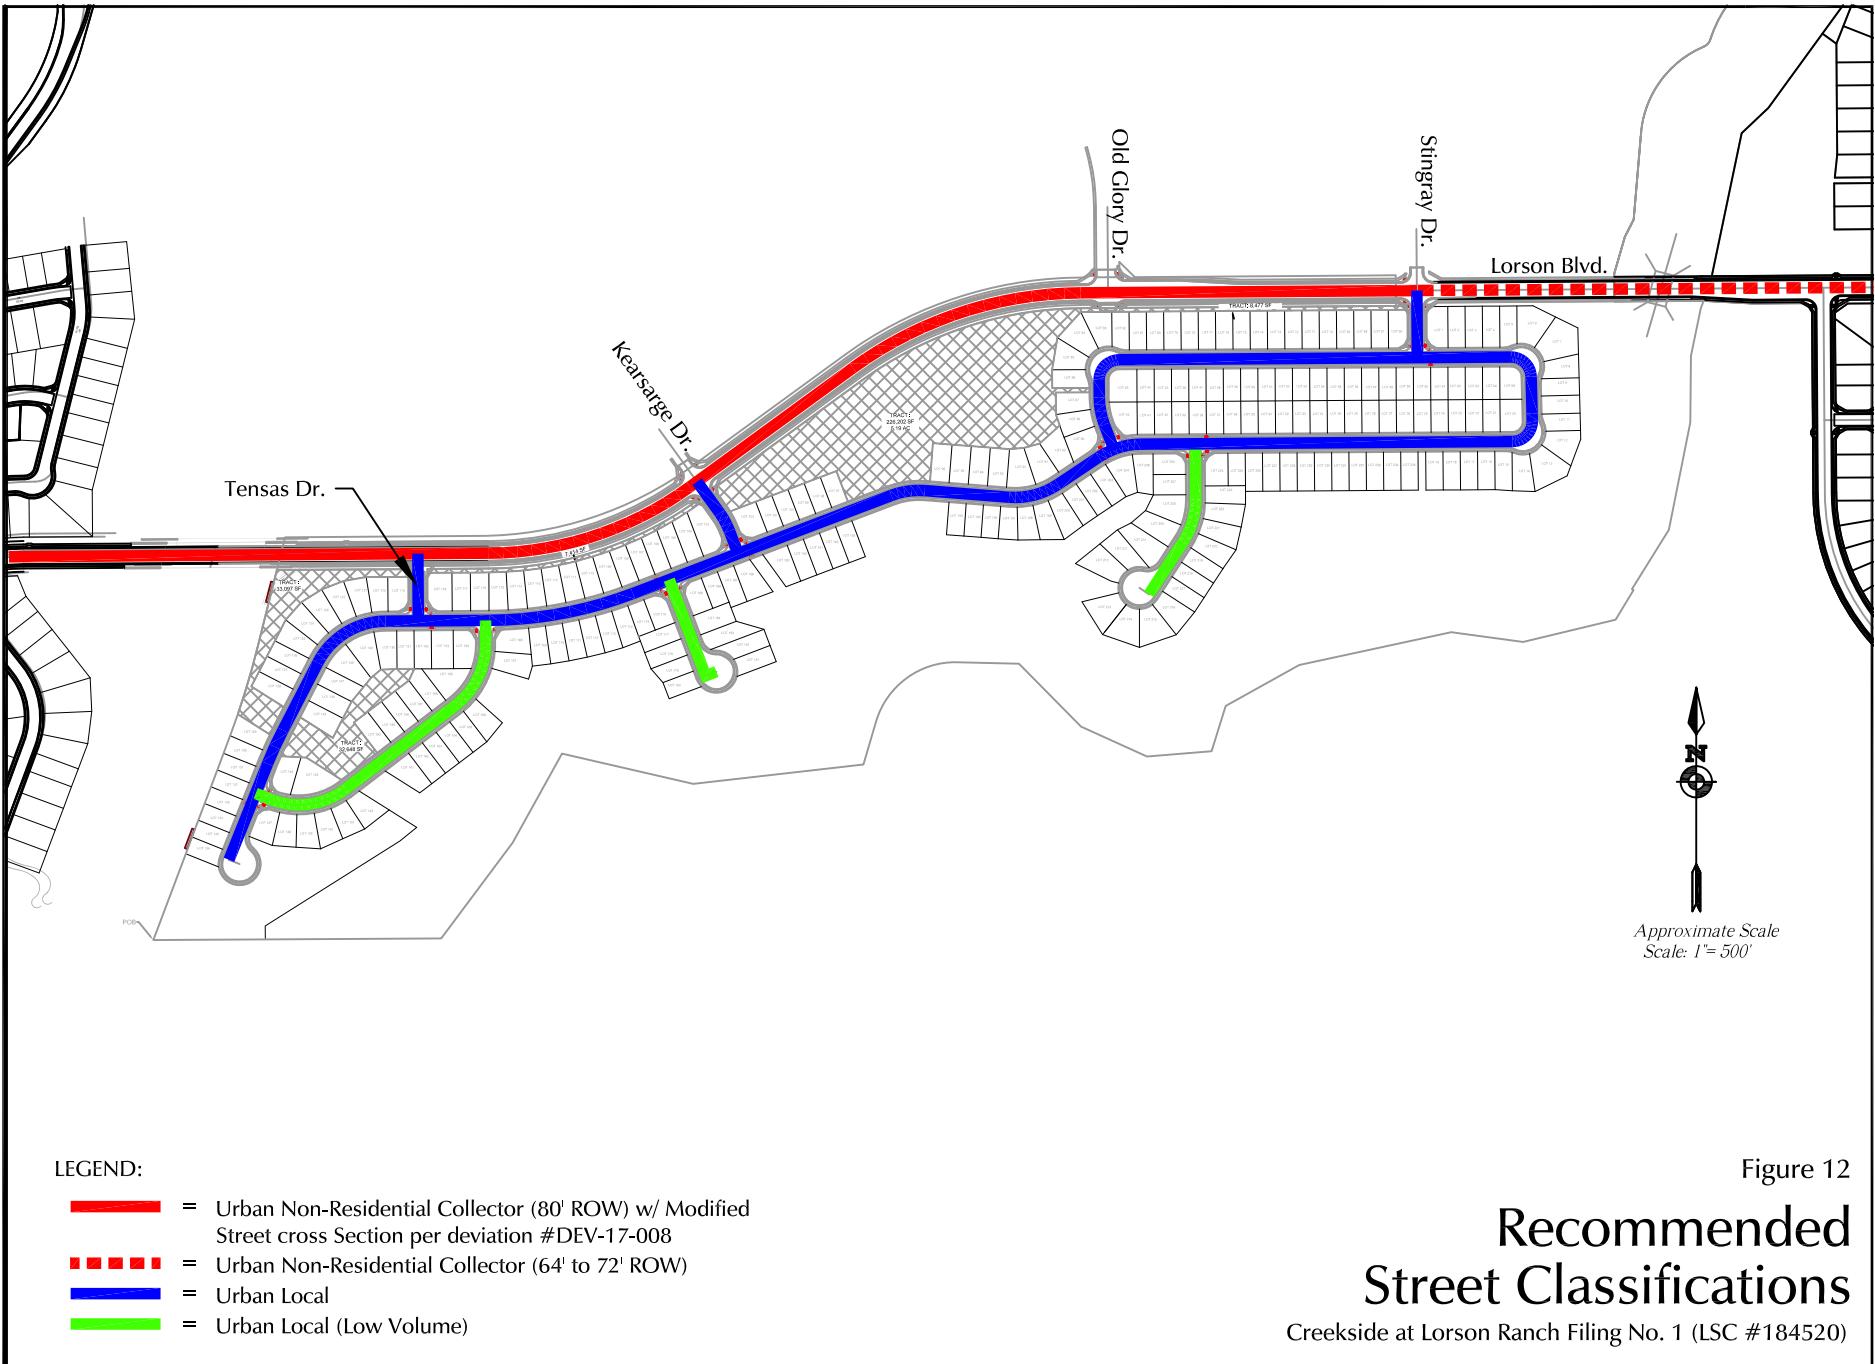

COUNTER MEASURES INC.

N/S STREET:
E/W STREET:
CITY:
COUNTY:

1889 YORK STREET
DENVER, COLORADO
303-333-7409

File Name : Marksheffel Rd - Fontaine Blvd AM
Site Code : 00174850
Start Date : 3/1/2018
Page No : 1

Groups Printed- VEHICLES

	Marksheffel Rd Southbound				Fontaine Blvd Westbound				Marksheffel Rd Northbound				Fontaine Blvd Eastbound				Int. Total	
	Start Time	Left	Thru	Right	Peds	Left	Thru	Right	Peds	Left	Thru	Right	Peds	Left	Thru	Right	Peds	
Factor	1.0	1.0	1.0	1.0		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
06:30 AM	5	30	4	0		21	74	38	0	10	80	7	0	8	18	6	0	301
06:45 AM	7	37	2	0		15	104	45	0	8	72	8	0	4	22	6	0	330
Total	12	67	6	0		36	178	83	0	18	152	15	0	12	40	12	0	631
07:00 AM	9	28	4	0		20	86	65	0	12	96	11	0	15	18	8	0	372
07:15 AM	14	32	7	0		12	84	45	0	9	74	11	0	5	29	12	0	334
07:30 AM	15	40	7	0		20	50	40	0	14	74	8	0	7	25	7	0	307
07:45 AM	14	20	2	0		13	59	25	0	5	42	12	0	7	38	5	0	242
Total	52	120	20	0		65	279	175	0	40	286	42	0	34	110	32	0	1255
08:00 AM	13	37	2	0		20	93	38	0	8	53	10	0	6	32	3	0	315
08:15 AM	6	34	4	0		18	96	23	0	12	39	6	0	5	22	9	0	274
Grand Total	83	258	32	0		139	646	319	0	78	530	73	0	57	204	56	0	2475
Apprch %	22.3	69.2	8.6	0.0		12.6	58.5	28.9	0.0	11.5	77.8	10.7	0.0	18.0	64.4	17.7	0.0	
Total %	3.4	10.4	1.3	0.0		5.6	26.1	12.9	0.0	3.2	21.4	2.9	0.0	2.3	8.2	2.3	0.0	

COUNTER MEASURES INC.

 1889 YORK STREET
 DENVER.COLORADO
 303-333-7409

 N/S STREET:
 E/W STREET:
 CITY:
 COUNTY:

 File Name : Marksheffel Rd - Fontaine Blvd PM
 Site Code : 00174850
 Start Date : 3/1/2018
 Page No : 1

Groups Printed- VEHICLES

	Marksheffel Rd Southbound				Fontaine Blvd Westbound				Marksheffel Rd Northbound				Marksheffel Blvd Eastbound				Int. Total
Start Time	Left	Thru	Right	Peds	Left	Thru	Right	Peds	Left	Thru	Right	Peds	Left	Thru	Right	Peds	
Factor	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
04:00 PM	31	70	8	0	5	35	16	0	4	46	19	0	11	68	12	0	325
04:15 PM	42	74	11	0	4	40	19	0	4	51	21	0	10	77	10	0	363
04:30 PM	35	59	12	0	8	45	20	0	11	46	23	0	10	70	14	0	353
04:45 PM	30	67	15	0	6	34	14	0	4	35	34	0	13	72	8	0	332
Total	138	270	46	0	23	154	69	0	23	178	97	0	44	287	44	0	1373
05:00 PM	27	54	8	0	6	40	22	0	4	37	35	0	6	54	18	0	311
05:15 PM	30	60	4	0	8	44	22	0	7	42	26	0	12	76	12	0	343
05:30 PM	33	65	6	0	9	42	25	0	9	41	23	0	4	103	10	0	370
05:45 PM	37	53	5	0	13	59	20	0	7	36	37	0	9	71	6	0	353
Total	127	232	23	0	36	185	89	0	27	156	121	0	31	304	46	0	1377
Grand Total	265	502	69	0	59	339	158	0	50	334	218	0	75	591	90	0	2750
Apprch %	31.7	60.0	8.3	0.0	10.6	61.0	28.4	0.0	8.3	55.5	36.2	0.0	9.9	78.2	11.9	0.0	
Total %	9.6	18.3	2.5	0.0	2.1	12.3	5.7	0.0	1.8	12.1	7.9	0.0	2.7	21.5	3.3	0.0	

Timings
1: Marksheffel Rd & Fountaine Blvd

Existing Traffic

AM Peak Hour

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	31	94	33	67	324	195	43	316	38	45	137	20
Future Volume (vph)	31	94	33	67	324	195	43	316	38	45	137	20
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA	Perm
Protected Phases	7	4		3	8			2			6	
Permitted Phases	4		4	8		8	2		2	6		6
Detector Phase	7	4	4	3	8	8	2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Minimum Split (s)	11.5	26.5	26.5	11.5	26.5	26.5	27.5	27.5	27.5	27.5	27.5	27.5
Total Split (s)	12.0	28.0	28.0	12.0	28.0	28.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (%)	15.0%	35.0%	35.0%	15.0%	35.0%	35.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5.5
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	6.5	7.5	7.5	7.5	7.5	7.5	7.5
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes						
Recall Mode	None											
Act Effect Green (s)	24.4	20.2	20.2	27.0	24.9	24.9	21.8	21.8	21.8	21.8	21.8	21.8
Actuated g/C Ratio	0.37	0.31	0.31	0.41	0.38	0.38	0.33	0.33	0.33	0.33	0.33	0.33
v/c Ratio	0.07	0.09	0.06	0.15	0.28	0.30	0.13	0.61	0.07	0.18	0.22	0.03
Control Delay	11.2	18.3	0.2	11.6	16.5	4.6	17.0	24.0	0.2	18.5	17.7	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.2	18.3	0.2	11.6	16.5	4.6	17.0	24.0	0.2	18.5	17.7	0.1
LOS	B	B	A	B	B	A	B	C	A	B	B	A
Approach Delay		13.1			12.0			21.0			16.1	
Approach LOS		B			B			C			B	

Intersection Summary

Cycle Length: 80

Actuated Cycle Length: 65.3

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 15.5


Intersection LOS: B

Intersection Capacity Utilization 74.8%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

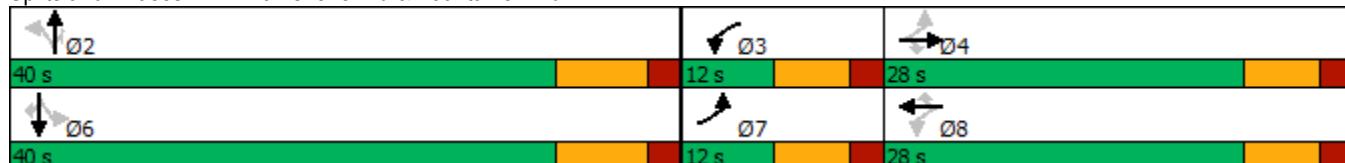

Timings
1: Marksheffel Rd & Fountaine Blvd

Existing Traffic
PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	31	304	46	36	185	89	27	156	121	127	232	23
Future Volume (vph)	31	304	46	36	185	89	27	156	121	127	232	23
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA	Perm
Protected Phases	7	4		3	8			2			6	
Permitted Phases	4		4	8		8	2		2	6		6
Detector Phase	7	4	4	3	8	8	2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Minimum Split (s)	11.5	26.5	26.5	11.5	26.5	26.5	27.5	27.5	27.5	27.5	27.5	27.5
Total Split (s)	12.0	28.0	28.0	12.0	28.0	28.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (%)	15.0%	35.0%	35.0%	15.0%	35.0%	35.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5.5
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	6.5	7.5	7.5	7.5	7.5	7.5	7.5
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes						
Recall Mode	None											
Act Effect Green (s)	22.2	20.2	20.2	22.2	20.2	20.2	20.2	20.2	20.2	20.2	20.2	20.2
Actuated g/C Ratio	0.38	0.34	0.34	0.38	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34
v/c Ratio	0.08	0.31	0.09	0.08	0.15	0.14	0.07	0.24	0.19	0.33	0.39	0.04
Control Delay	10.1	16.2	0.3	10.2	15.2	1.5	16.1	16.8	4.0	18.9	18.4	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.1	16.2	0.3	10.2	15.2	1.5	16.1	16.8	4.0	18.9	18.4	0.1
LOS	B	B	A	B	B	A	B	B	A	B	B	A
Approach Delay		13.8			10.7			11.6			17.5	
Approach LOS		B			B			B			B	

Intersection Summary

Cycle Length: 80

Actuated Cycle Length: 58.8

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.39

Intersection Signal Delay: 13.7


Intersection LOS: B

Intersection Capacity Utilization 77.5%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

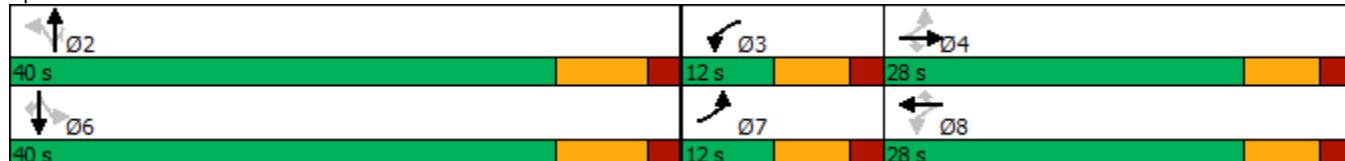

Timings
1: Marksheffel Rd & Fountaine Blvd

Short-Term Background Traffic

AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	32	167	37	224	506	361	54	335	101	124	142	20
Future Volume (vph)	32	167	37	224	506	361	54	335	101	124	142	20
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA	Perm
Protected Phases	7	4		3	8			2			6	
Permitted Phases	4		4	8		8	2		2	6		6
Detector Phase	7	4	4	3	8	8	2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Minimum Split (s)	11.5	26.5	26.5	11.5	26.5	26.5	27.5	27.5	27.5	27.5	27.5	27.5
Total Split (s)	12.0	28.0	28.0	12.0	28.0	28.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (%)	15.0%	35.0%	35.0%	15.0%	35.0%	35.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5.5
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	6.5	7.5	7.5	7.5	7.5	7.5	7.5
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes						
Recall Mode	None											
Act Effect Green (s)	26.2	20.6	20.6	30.3	28.2	28.2	22.6	22.6	22.6	22.6	22.6	22.6
Actuated g/C Ratio	0.38	0.30	0.30	0.44	0.41	0.41	0.33	0.33	0.33	0.33	0.33	0.33
v/c Ratio	0.09	0.17	0.07	0.51	0.41	0.48	0.16	0.67	0.20	0.62	0.25	0.04
Control Delay	12.0	19.3	0.2	18.2	18.0	5.7	17.6	26.2	3.6	34.0	18.2	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	12.0	19.3	0.2	18.2	18.0	5.7	17.6	26.2	3.6	34.0	18.2	0.1
LOS	B	B	A	B	B	A	B	C	A	C	B	A
Approach Delay		15.3			14.0			20.6			23.8	
Approach LOS		B			B			C			C	

Intersection Summary

Cycle Length: 80

Actuated Cycle Length: 69.3

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 17.0


Intersection LOS: B

Intersection Capacity Utilization 86.7%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

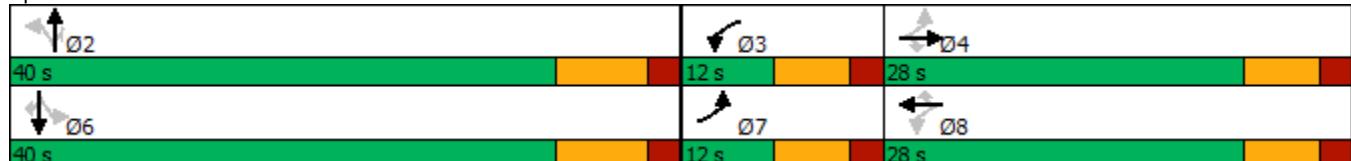

Intersection						
Int Delay, s/veh	5.6					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖	↗	↑	↖	↖	↑
Traffic Vol, veh/h	153	25	465	50	9	394
Future Vol, veh/h	153	25	465	50	9	394
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	250	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	15
Peak Hour Factor	92	92	83	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	166	27	560	54	10	428
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	1008	560	0	0	614	0
Stage 1	560	-	-	-	-	-
Stage 2	448	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	267	528	-	-	965	-
Stage 1	572	-	-	-	-	-
Stage 2	644	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	264	528	-	-	965	-
Mov Cap-2 Maneuver	264	-	-	-	-	-
Stage 1	566	-	-	-	-	-
Stage 2	644	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	35.5	0		0.2		
HCM LOS	E					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	264	528	965	-
HCM Lane V/C Ratio	-	-	0.63	0.051	0.01	-
HCM Control Delay (s)	-	-	39.3	12.2	8.8	-
HCM Lane LOS	-	-	E	B	A	-
HCM 95th %tile Q(veh)	-	-	3.9	0.2	0	-

Intersection						
Int Delay, s/veh	1.2					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↗	↘		
Traffic Vol, veh/h	3	23	68	1	0	12
Future Vol, veh/h	3	23	68	1	0	12
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	3	25	74	1	0	13
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	75	0	-	0	106	75
Stage 1	-	-	-	-	75	-
Stage 2	-	-	-	-	31	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1524	-	-	-	892	986
Stage 1	-	-	-	-	948	-
Stage 2	-	-	-	-	992	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1524	-	-	-	890	986
Mov Cap-2 Maneuver	-	-	-	-	845	-
Stage 1	-	-	-	-	946	-
Stage 2	-	-	-	-	992	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.9	0	8.7			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1524	-	-	-	986	-
HCM Lane V/C Ratio	0.002	-	-	-	0.013	-
HCM Control Delay (s)	7.4	-	-	-	8.7	-
HCM Lane LOS	A	-	-	-	A	-
HCM 95th %tile Q(veh)	0	-	-	-	0	-

Intersection

Int Delay, s/veh 0.8

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	2	21	63	7	2	6
Future Vol, veh/h	2	21	63	7	2	6
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	23	68	8	2	7

Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	76	0	-	0	95	68
Stage 1	-	-	-	-	68	-
Stage 2	-	-	-	-	27	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1523	-	-	-	905	995
Stage 1	-	-	-	-	955	-
Stage 2	-	-	-	-	996	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1523	-	-	-	904	995
Mov Cap-2 Maneuver	-	-	-	-	855	-
Stage 1	-	-	-	-	954	-
Stage 2	-	-	-	-	996	-

Approach	EB	WB	SB
HCM Control Delay, s	0.6	0	8.8
HCM LOS			A

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1523	-	-	-	855	995
HCM Lane V/C Ratio	0.001	-	-	-	0.003	0.007
HCM Control Delay (s)	7.4	-	-	-	9.2	8.6
HCM Lane LOS	A	-	-	-	A	A
HCM 95th %tile Q(veh)	0	-	-	-	0	0

Intersection						
Int Delay, s/veh	1.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	4	19	57	0	0	13
Future Vol, veh/h	4	19	57	0	0	13
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	4	21	62	0	0	14
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	62	0	-	0	91	62
Stage 1	-	-	-	-	62	-
Stage 2	-	-	-	-	29	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1541	-	-	-	909	1003
Stage 1	-	-	-	-	961	-
Stage 2	-	-	-	-	994	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1541	-	-	-	906	1003
Mov Cap-2 Maneuver	-	-	-	-	857	-
Stage 1	-	-	-	-	958	-
Stage 2	-	-	-	-	994	-
Approach	EB	WB	SB			
HCM Control Delay, s	1.3	0	8.6			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1541	-	-	-	1003	
HCM Lane V/C Ratio	0.003	-	-	-	0.014	
HCM Control Delay (s)	7.3	-	-	-	8.6	
HCM Lane LOS	A	-	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Timings
1: Marksheffel Rd & Fountaine Blvd

Short-Term Background Traffic

PM Peak Hour

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	36	459	59	106	278	165	34	184	224	289	247	23
Future Volume (vph)	36	459	59	106	278	165	34	184	224	289	247	23
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA	Perm
Protected Phases	7	4		3	8			2			6	
Permitted Phases	4		4	8		8	2		2	6		6
Detector Phase	7	4	4	3	8	8	2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Minimum Split (s)	11.5	26.5	26.5	11.5	26.5	26.5	27.5	27.5	27.5	27.5	27.5	27.5
Total Split (s)	12.0	28.0	28.0	12.0	28.0	28.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (%)	15.0%	35.0%	35.0%	15.0%	35.0%	35.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5.5
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	6.5	7.5	7.5	7.5	7.5	7.5	7.5
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes						
Recall Mode	None											
Act Effect Green (s)	24.9	20.7	20.7	26.3	23.3	23.3	25.1	25.1	25.1	25.1	25.1	25.1
Actuated g/C Ratio	0.36	0.30	0.30	0.38	0.34	0.34	0.36	0.36	0.36	0.36	0.36	0.36
v/c Ratio	0.10	0.54	0.13	0.34	0.25	0.28	0.09	0.30	0.33	0.74	0.40	0.04
Control Delay	13.6	24.2	0.4	16.4	20.0	5.3	15.9	17.7	3.7	31.5	19.0	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	13.6	24.2	0.4	16.4	20.0	5.3	15.9	17.7	3.7	31.5	19.0	0.1
LOS	B	C	A	B	C	A	B	B	A	C	B	A
Approach Delay		21.0			14.9				10.5		24.7	
Approach LOS		C			B				B		C	

Intersection Summary

Cycle Length: 80

Actuated Cycle Length: 69.3

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.74

Intersection Signal Delay: 18.3


Intersection LOS: B

Intersection Capacity Utilization 79.2%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

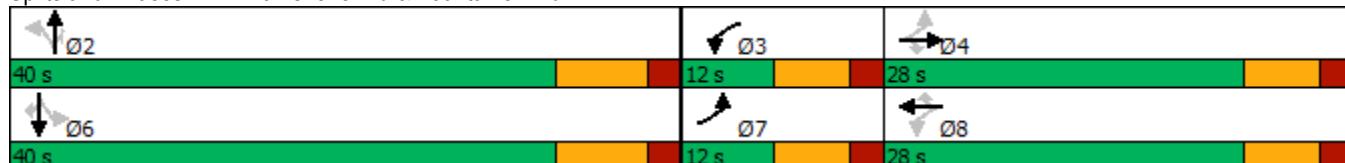

Intersection						
Int Delay, s/veh	2.7					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖ ↗ ↘ ↗ ↘ ↗					
Traffic Vol, veh/h	102	17	425	170	28	384
Future Vol, veh/h	102	17	425	170	28	384
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	250	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	15
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	111	18	462	185	30	417
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	939	462	0	0	647	0
Stage 1	462	-	-	-	-	-
Stage 2	477	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	293	600	-	-	939	-
Stage 1	634	-	-	-	-	-
Stage 2	624	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	284	600	-	-	939	-
Mov Cap-2 Maneuver	284	-	-	-	-	-
Stage 1	614	-	-	-	-	-
Stage 2	624	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	23.5	0		0.6		
HCM LOS	C					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	284	600	939	-
HCM Lane V/C Ratio	-	-	0.39	0.031	0.032	-
HCM Control Delay (s)	-	-	25.6	11.2	9	-
HCM Lane LOS	-	-	D	B	A	-
HCM 95th %tile Q(veh)	-	-	1.8	0.1	0.1	-

Intersection						
Int Delay, s/veh	1.1					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↗	↘		
Traffic Vol, veh/h	12	77	46	2	0	8
Future Vol, veh/h	12	77	46	2	0	8
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	13	84	50	2	0	9
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	52	0	-	0	161	51
Stage 1	-	-	-	-	51	-
Stage 2	-	-	-	-	110	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1554	-	-	-	830	1017
Stage 1	-	-	-	-	971	-
Stage 2	-	-	-	-	915	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1554	-	-	-	823	1017
Mov Cap-2 Maneuver	-	-	-	-	798	-
Stage 1	-	-	-	-	963	-
Stage 2	-	-	-	-	915	-
Approach	EB	WB	SB			
HCM Control Delay, s	1	0	8.6			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1554	-	-	-	1017	
HCM Lane V/C Ratio	0.008	-	-	-	0.009	
HCM Control Delay (s)	7.3	-	-	-	8.6	
HCM Lane LOS	A	-	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Intersection						
Int Delay, s/veh	1.3					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↑	↖	↖	↖
Traffic Vol, veh/h	6	71	42	5	9	6
Future Vol, veh/h	6	71	42	5	9	6
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	7	77	46	5	10	7
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	51	0	-	0	137	46
Stage 1	-	-	-	-	46	-
Stage 2	-	-	-	-	91	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1555	-	-	-	856	1023
Stage 1	-	-	-	-	976	-
Stage 2	-	-	-	-	933	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1555	-	-	-	852	1023
Mov Cap-2 Maneuver	-	-	-	-	820	-
Stage 1	-	-	-	-	971	-
Stage 2	-	-	-	-	933	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.6	0	9			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1555	-	-	-	820	1023
HCM Lane V/C Ratio	0.004	-	-	-	0.012	0.006
HCM Control Delay (s)	7.3	-	-	-	9.4	8.5
HCM Lane LOS	A	-	-	-	A	A
HCM 95th %tile Q(veh)	0	-	-	-	0	0

Intersection						
Int Delay, s/veh	1.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	16	64	38	0	0	9
Future Vol, veh/h	16	64	38	0	0	9
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	17	70	41	0	0	10
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	41	0	-	0	145	41
Stage 1	-	-	-	-	41	-
Stage 2	-	-	-	-	104	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1568	-	-	-	847	1030
Stage 1	-	-	-	-	981	-
Stage 2	-	-	-	-	920	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1568	-	-	-	838	1030
Mov Cap-2 Maneuver	-	-	-	-	805	-
Stage 1	-	-	-	-	970	-
Stage 2	-	-	-	-	920	-
Approach	EB	WB	SB			
HCM Control Delay, s	1.5	0	8.5			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1568	-	-	-	1030	
HCM Lane V/C Ratio	0.011	-	-	-	0.009	
HCM Control Delay (s)	7.3	-	-	-	8.5	
HCM Lane LOS	A	-	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Timings
1: Marksheffel Rd & Fountaine Blvd

Short-Term Total Traffic

AM Peak Hour

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑	↑
Traffic Volume (vph)	32	179	41	224	521	364	87	362	101	127	148	20
Future Volume (vph)	32	179	41	224	521	364	87	362	101	127	148	20
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA	Perm
Protected Phases	7	4		3	8			2			6	
Permitted Phases	4		4	8		8	2		2	6		6
Detector Phase	7	4	4	3	8	8	2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Minimum Split (s)	11.5	26.5	26.5	11.5	26.5	26.5	27.5	27.5	27.5	27.5	27.5	27.5
Total Split (s)	12.0	28.0	28.0	12.0	28.0	28.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (%)	15.0%	35.0%	35.0%	15.0%	35.0%	35.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5.5
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	6.5	7.5	7.5	7.5	7.5	7.5	7.5
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes						
Recall Mode	None											
Act Effect Green (s)	26.2	20.7	20.7	30.4	28.3	28.3	23.9	23.9	23.9	23.9	23.9	23.9
Actuated g/C Ratio	0.37	0.29	0.29	0.43	0.40	0.40	0.34	0.34	0.34	0.34	0.34	0.34
v/c Ratio	0.09	0.19	0.08	0.52	0.43	0.50	0.26	0.69	0.20	0.68	0.26	0.04
Control Delay	13.0	20.3	0.3	19.7	19.1	7.0	18.5	26.6	3.4	38.4	17.9	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	13.0	20.3	0.3	19.7	19.1	7.0	18.5	26.6	3.4	38.4	17.9	0.1
LOS	B	C	A	B	B	A	B	C	A	D	B	A
Approach Delay		16.1			15.2			21.1			25.5	
Approach LOS		B			B			C			C	

Intersection Summary

Cycle Length: 80

Actuated Cycle Length: 70.7

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.69

Intersection Signal Delay: 18.1


Intersection LOS: B

Intersection Capacity Utilization 88.1%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

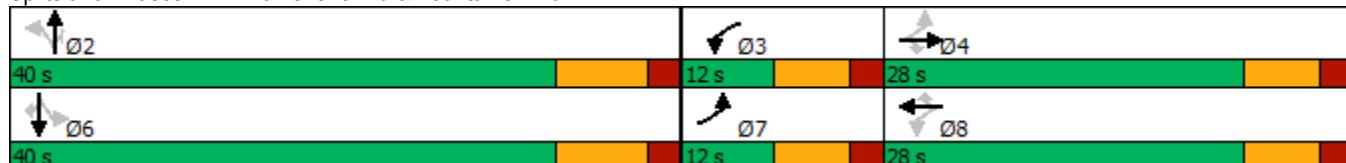

Intersection						
Int Delay, s/veh	10.8					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖ ↗ ↘ ↗ ↘ ↗					
Traffic Vol, veh/h	194	85	465	64	19	394
Future Vol, veh/h	194	85	465	64	19	394
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	250	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	15
Peak Hour Factor	92	92	83	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	211	92	560	70	21	428
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	1030	560	0	0	630	0
Stage 1	560	-	-	-	-	-
Stage 2	470	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	259	528	-	-	952	-
Stage 1	572	-	-	-	-	-
Stage 2	629	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	253	528	-	-	952	-
Mov Cap-2 Maneuver	253	-	-	-	-	-
Stage 1	559	-	-	-	-	-
Stage 2	629	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	48.5	0		0.4		
HCM LOS	E					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	253	528	952	-
HCM Lane V/C Ratio	-	-	0.833	0.175	0.022	-
HCM Control Delay (s)	-	-	63.9	13.3	8.9	-
HCM Lane LOS	-	-	F	B	A	-
HCM 95th %tile Q(veh)	-	-	6.6	0.6	0.1	-

Intersection												
Int Delay, s/veh	4.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↗		↖	↗		↔	↔		↔	↔	
Traffic Vol, veh/h	3	29	11	1	77	1	65	1	3	0	9	12
Future Vol, veh/h	3	29	11	1	77	1	65	1	3	0	9	12
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	3	32	12	1	84	1	71	1	3	0	10	13
Major/Minor												
Major1		Major2			Minor1			Minor2				
Conflicting Flow All	85	0	0	44	0	0	142	131	38	133	137	85
Stage 1	-	-	-	-	-	-	44	44	-	87	87	-
Stage 2	-	-	-	-	-	-	98	87	-	46	50	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1512	-	-	1564	-	-	828	760	1034	839	754	974
Stage 1	-	-	-	-	-	-	970	858	-	921	823	-
Stage 2	-	-	-	-	-	-	908	823	-	968	853	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1512	-	-	1564	-	-	807	758	1034	834	752	974
Mov Cap-2 Maneuver	-	-	-	-	-	-	807	758	-	834	752	-
Stage 1	-	-	-	-	-	-	968	856	-	919	822	-
Stage 2	-	-	-	-	-	-	885	822	-	962	851	-
Approach												
EB			WB			NB			SB			
HCM Control Delay, s	0.5		0.1			9.9			9.3			
HCM LOS	A						A					
Minor Lane/Major Mvmt		NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1			
Capacity (veh/h)	814	1512	-	-	1564	-	-	-	865			
HCM Lane V/C Ratio	0.092	0.002	-	-	0.001	-	-	-	0.026			
HCM Control Delay (s)	9.9	7.4	-	-	7.3	-	-	-	9.3			
HCM Lane LOS	A	A	-	-	A	-	-	-	A			
HCM 95th %tile Q(veh)	0.3	0	-	-	0	-	-	-	0.1			

Intersection						
Int Delay, s/veh	1					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	2	30	73	25	8	6
Future Vol, veh/h	2	30	73	25	8	6
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	33	79	27	9	7
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	106	0	-	0	116	79
Stage 1	-	-	-	-	79	-
Stage 2	-	-	-	-	37	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1485	-	-	-	880	981
Stage 1	-	-	-	-	944	-
Stage 2	-	-	-	-	985	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1485	-	-	-	879	981
Mov Cap-2 Maneuver	-	-	-	-	839	-
Stage 1	-	-	-	-	943	-
Stage 2	-	-	-	-	985	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.5	0	9			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1485	-	-	-	839	981
HCM Lane V/C Ratio	0.001	-	-	-	0.01	0.007
HCM Control Delay (s)	7.4	-	-	-	9.3	8.7
HCM Lane LOS	A	-	-	-	A	A
HCM 95th %tile Q(veh)	0	-	-	-	0	0

Intersection																			
Int Delay, s/veh	3																		
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR							
Lane Configurations	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗	↖ ↗							
Traffic Vol, veh/h	4	26	8	2	60	0	25	1	4	0	0	13							
Future Vol, veh/h	4	26	8	2	60	0	25	1	4	0	0	13							
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0							
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop							
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None							
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-							
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-							
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-							
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92							
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2							
Mvmt Flow	4	28	9	2	65	0	27	1	4	0	0	14							
Major/Minor																			
Major1		Major2			Minor1			Minor2											
Conflicting Flow All	65	0	0	37	0	0	117	110	33	112	114	65							
Stage 1	-	-	-	-	-	-	41	41	-	69	69	-							
Stage 2	-	-	-	-	-	-	76	69	-	43	45	-							
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22							
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-							
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-							
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318							
Pot Cap-1 Maneuver	1537	-	-	1574	-	-	859	780	1041	866	776	999							
Stage 1	-	-	-	-	-	-	974	861	-	941	837	-							
Stage 2	-	-	-	-	-	-	933	837	-	971	857	-							
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-							
Mov Cap-1 Maneuver	1537	-	-	1574	-	-	844	777	1041	859	773	999							
Mov Cap-2 Maneuver	-	-	-	-	-	-	844	777	-	859	773	-							
Stage 1	-	-	-	-	-	-	971	858	-	938	836	-							
Stage 2	-	-	-	-	-	-	919	836	-	963	854	-							
Approach																			
EB			WB			NB			SB										
HCM Control Delay, s	0.8		0.2			9.3			8.7										
HCM LOS	A						A												
Minor Lane/Major Mvmt																			
Capacity (veh/h)	863	1537	-	-	1574	-	-	-	999										
HCM Lane V/C Ratio	0.038	0.003	-	-	0.001	-	-	-	0.014										
HCM Control Delay (s)	9.3	7.3	-	-	7.3	-	-	-	8.7										
HCM Lane LOS	A	A	-	-	A	-	-	-	A										
HCM 95th %tile Q(veh)	0.1	0	-	-	0	-	-	-	0										

Intersection						
Int Delay, s/veh	1.4					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑	↑	↑	↑	Y	Y
Traffic Vol, veh/h	39	11	2	152	29	4
Future Vol, veh/h	39	11	2	152	29	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	150	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	42	12	2	165	32	4
Major/Minor						
Conflicting Flow All	Major1	Major2	Minor1			
	0	0	54	0	217	48
Stage 1	-	-	-	-	48	-
Stage 2	-	-	-	-	169	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1551	-	771	1021
Stage 1	-	-	-	-	974	-
Stage 2	-	-	-	-	861	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	1551	-	770	1021
Mov Cap-2 Maneuver	-	-	-	-	760	-
Stage 1	-	-	-	-	973	-
Stage 2	-	-	-	-	861	-
Approach						
HCM Control Delay, s	EB	WB	NB			
	0	0.1	9.8			
HCM LOS			A			
Minor Lane/Major Mvmt						
Capacity (veh/h)	NBLn1	EBT	EBR	WBL	WBT	
	784	-	-	1551	-	
HCM Lane V/C Ratio	0.046	-	-	0.001	-	
HCM Control Delay (s)	9.8	-	-	7.3	-	
HCM Lane LOS	A	-	-	A	-	
HCM 95th %tile Q(veh)	0.1	-	-	0	-	

Timings
1: Marksheffel Rd & Fountaine Blvd

Short-Term Total Traffic
PM Peak Hour

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑	↑↑	↑	↑	↑	↑	↑	↑↑	↑
Traffic Volume (vph)	36	508	73	106	289	167	58	203	224	301	271	23
Future Volume (vph)	36	508	73	106	289	167	58	203	224	301	271	23
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA	Perm
Protected Phases	7	4		3	8			2			6	
Permitted Phases	4		4	8		8	2		2	6		6
Detector Phase	7	4	4	3	8	8	2	2	2	6	6	6
Switch Phase												
Minimum Initial (s)	5.0	20.0	20.0	5.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Minimum Split (s)	11.5	26.5	26.5	11.5	26.5	26.5	27.5	27.5	27.5	27.5	27.5	27.5
Total Split (s)	12.0	28.0	28.0	12.0	28.0	28.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (%)	15.0%	35.0%	35.0%	15.0%	35.0%	35.0%	50.0%	50.0%	50.0%	50.0%	50.0%	50.0%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5.5
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	6.5	7.5	7.5	7.5	7.5	7.5	7.5
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes						
Recall Mode	None											
Act Effect Green (s)	25.2	21.0	21.0	26.5	23.5	23.5	26.0	26.0	26.0	26.0	26.0	26.0
Actuated g/C Ratio	0.36	0.30	0.30	0.38	0.33	0.33	0.37	0.37	0.37	0.37	0.37	0.37
v/c Ratio	0.10	0.60	0.16	0.37	0.27	0.28	0.17	0.32	0.33	0.77	0.43	0.04
Control Delay	14.0	25.6	1.7	17.5	20.6	5.3	16.9	17.9	3.7	33.7	19.4	0.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	14.0	25.6	1.7	17.5	20.6	5.3	16.9	17.9	3.7	33.7	19.4	0.1
LOS	B	C	A	B	C	A	B	B	A	C	B	A
Approach Delay		22.1			15.5			11.2			25.9	
Approach LOS		C			B			B			C	

Intersection Summary

Cycle Length: 80

Actuated Cycle Length: 70.4

Natural Cycle: 70

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 19.2


Intersection LOS: B

Intersection Capacity Utilization 79.2%

ICU Level of Service D

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

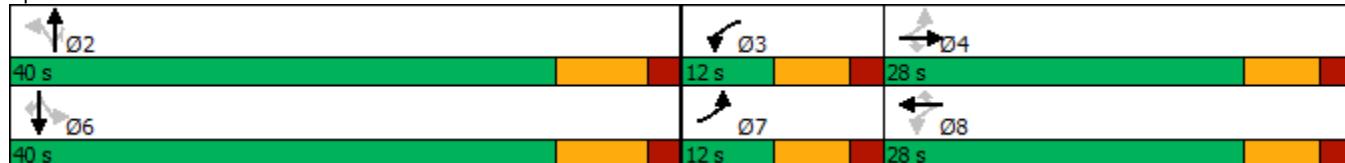

Intersection						
Int Delay, s/veh	5.1					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖ ↗ ↘ ↗ ↘ ↗					
Traffic Vol, veh/h	132	60	425	220	65	384
Future Vol, veh/h	132	60	425	220	65	384
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	250	250	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	15
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	143	65	462	239	71	417
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	1021	462	0	0	701	0
Stage 1	462	-	-	-	-	-
Stage 2	559	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	262	600	-	-	896	-
Stage 1	634	-	-	-	-	-
Stage 2	572	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	241	600	-	-	896	-
Mov Cap-2 Maneuver	241	-	-	-	-	-
Stage 1	584	-	-	-	-	-
Stage 2	572	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	31	0		1.4		
HCM LOS	D					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	241	600	896	-
HCM Lane V/C Ratio	-	-	0.595	0.109	0.079	-
HCM Control Delay (s)	-	-	39.8	11.7	9.4	-
HCM Lane LOS	-	-	E	B	A	-
HCM 95th %tile Q(veh)	-	-	3.4	0.4	0.3	-

Intersection																
Int Delay, s/veh	3.6															
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR				
Lane Configurations	↖	↗		↖	↗		↔	↔		↔	↔					
Traffic Vol, veh/h	12	86	39	0	52	2	46	0	0	0	35	8				
Future Vol, veh/h	12	86	39	0	52	2	46	0	0	0	35	8				
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop				
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None				
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-				
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-				
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-				
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92				
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2				
Mvmt Flow	13	93	42	0	57	2	50	0	0	0	38	9				
Major/Minor																
Major1		Major2		Minor1		Minor2										
Conflicting Flow All	59	0	0	135	0	0	222	199	114	198	219	58				
Stage 1	-	-	-	-	-	-	140	140	-	58	58	-				
Stage 2	-	-	-	-	-	-	82	59	-	140	161	-				
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22				
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-				
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-				
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318				
Pot Cap-1 Maneuver	1545	-	-	1449	-	-	734	697	939	761	679	1008				
Stage 1	-	-	-	-	-	-	863	781	-	954	847	-				
Stage 2	-	-	-	-	-	-	926	846	-	863	765	-				
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-				
Mov Cap-1 Maneuver	1545	-	-	1449	-	-	692	691	939	756	674	1008				
Mov Cap-2 Maneuver	-	-	-	-	-	-	692	691	-	756	674	-				
Stage 1	-	-	-	-	-	-	856	775	-	946	847	-				
Stage 2	-	-	-	-	-	-	877	846	-	856	759	-				
Approach																
EB			WB			NB			SB							
HCM Control Delay, s	0.6		0		10.6		10.4									
HCM LOS						B		B								
Minor Lane/Major Mvmt																
Capacity (veh/h)	692	1545	-	-	1449	-	-	-	718							
HCM Lane V/C Ratio	0.072	0.008	-	-	-	-	-	-	0.065							
HCM Control Delay (s)	10.6	7.4	-	-	0	-	-	-	10.4							
HCM Lane LOS	B	A	-	-	A	-	-	-	B							
HCM 95th %tile Q(veh)	0.2	0	-	-	0	-	-	-	0.2							

Intersection						
Int Delay, s/veh	2					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	6	80	48	18	30	6
Future Vol, veh/h	6	80	48	18	30	6
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	7	87	52	20	33	7
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	72	0	-	0	153	52
Stage 1	-	-	-	-	52	-
Stage 2	-	-	-	-	101	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1528	-	-	-	839	1016
Stage 1	-	-	-	-	970	-
Stage 2	-	-	-	-	923	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1528	-	-	-	835	1016
Mov Cap-2 Maneuver	-	-	-	-	808	-
Stage 1	-	-	-	-	965	-
Stage 2	-	-	-	-	923	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.5	0	9.4			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1528	-	-	-	808	1016
HCM Lane V/C Ratio	0.004	-	-	-	0.04	0.006
HCM Control Delay (s)	7.4	-	-	-	9.6	8.6
HCM Lane LOS	A	-	-	-	A	A
HCM 95th %tile Q(veh)	0	-	-	-	0.1	0

Intersection

Int Delay, s/veh 2.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↔	↔		↔	↔	
Traffic Vol, veh/h	16	65	30	1	39	0	18	0	1	0	0	9
Future Vol, veh/h	16	65	30	1	39	0	18	0	1	0	0	9
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	17	71	33	1	42	0	20	0	1	0	0	10

Major/Minor	Major1	Major2			Minor1			Minor2					
Conflicting Flow All	42	0	0	104	0	0	171	166	88	166	182	42	
Stage 1	-	-	-	-	-	-	122	122	-	44	44	-	
Stage 2	-	-	-	-	-	-	49	44	-	122	138	-	
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-	
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318	
Pot Cap-1 Maneuver	1567	-	-	1488	-	-	792	727	970	798	712	1029	
Stage 1	-	-	-	-	-	-	882	795	-	970	858	-	
Stage 2	-	-	-	-	-	-	964	858	-	882	782	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	1567	-	-	1488	-	-	778	718	970	790	703	1029	
Mov Cap-2 Maneuver	-	-	-	-	-	-	778	718	-	790	703	-	
Stage 1	-	-	-	-	-	-	872	786	-	959	857	-	
Stage 2	-	-	-	-	-	-	954	857	-	871	773	-	

Approach	EB	WB			NB			SB					
HCM Control Delay, s	1.1	0.2			9.7			8.5					
HCM LOS					A			A					
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1					
Capacity (veh/h)	786	1567	-	-	1488	-	-	1029					
HCM Lane V/C Ratio	0.026	0.011	-	-	0.001	-	-	0.01					
HCM Control Delay (s)	9.7	7.3	-	-	7.4	-	-	8.5					
HCM Lane LOS	A	A	-	-	A	-	-	A					
HCM 95th %tile Q(veh)	0.1	0	-	-	0	-	-	0					

Intersection						
Int Delay, s/veh	0.8					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑	↑	↑	↑	Y	Y
Traffic Vol, veh/h	136	40	1	105	21	1
Future Vol, veh/h	136	40	1	105	21	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	150	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	148	43	1	114	23	1
Major/Minor						
Major1		Major2		Minor1		
Conflicting Flow All	0	0	191	0	286	170
Stage 1	-	-	-	-	170	-
Stage 2	-	-	-	-	116	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1383	-	704	874
Stage 1	-	-	-	-	860	-
Stage 2	-	-	-	-	909	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	1383	-	703	874
Mov Cap-2 Maneuver	-	-	-	-	723	-
Stage 1	-	-	-	-	859	-
Stage 2	-	-	-	-	909	-
Approach						
EB		WB		NB		
HCM Control Delay, s	0		0.1		10.1	
HCM LOS				B		
Minor Lane/Major Mvmt						
NBLn1		EBT	EBR	WBL	WBT	
Capacity (veh/h)	729	-	-	1383	-	
HCM Lane V/C Ratio	0.033	-	-	0.001	-	
HCM Control Delay (s)	10.1	-	-	7.6	-	
HCM Lane LOS	B	-	-	A	-	
HCM 95th %tile Q(veh)	0.1	-	-	0	-	


Timings
5: Marksheffel Rd & Lorson Blvd

Short-Term Total Traffic
AM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗	↑ ↗
Traffic Volume (vph)	194	85	465	64	19	394
Future Volume (vph)	194	85	465	64	19	394
Turn Type	Prot	Perm	NA	Perm	Perm	NA
Protected Phases	8		2			6
Permitted Phases			8		2	6
Detector Phase	8	8	2	2	6	6
Switch Phase						
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Split (s)	20.0	20.0	20.0	20.0	20.0	20.0
Total Split (s)	15.0	15.0	75.0	75.0	75.0	75.0
Total Split (%)	16.7%	16.7%	83.3%	83.3%	83.3%	83.3%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag						
Lead-Lag Optimize?						
Recall Mode	None	None	None	None	None	None
Act Effect Green (s)	10.1	10.1	16.0	16.0	16.0	16.0
Actuated g/C Ratio	0.28	0.28	0.44	0.44	0.44	0.44
v/c Ratio	0.43	0.18	0.68	0.09	0.08	0.56
Control Delay	15.4	5.0	12.6	2.1	6.1	10.5
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	15.4	5.0	12.6	2.1	6.1	10.5
LOS	B	A	B	A	A	B
Approach Delay	12.2		11.5			10.3
Approach LOS	B		B			B
Intersection Summary						
Cycle Length: 90						
Actuated Cycle Length: 36.3						
Natural Cycle: 45						
Control Type: Actuated-Uncoordinated						
Maximum v/c Ratio: 0.68						
Intersection Signal Delay: 11.3					Intersection LOS: B	
Intersection Capacity Utilization 43.6%					ICU Level of Service A	
Analysis Period (min) 15						

Splits and Phases: 5: Marksheffel Rd & Lorson Blvd

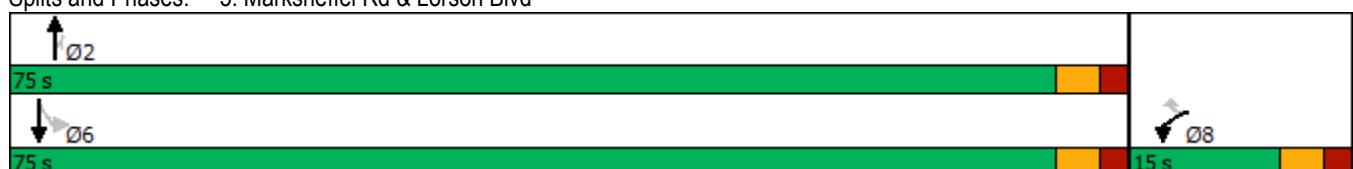

Timings
5: Marksheffel Rd & Lorson Blvd

Short-Term Total Traffic
PM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑ ↗	↗ ↑	↑ ↗	↗ ↑	↗ ↓	↑ ↗
Traffic Volume (vph)	132	60	425	220	65	384
Future Volume (vph)	132	60	425	220	65	384
Turn Type	Prot	Perm	NA	Perm	Perm	NA
Protected Phases	8		2			6
Permitted Phases			8		2	6
Detector Phase	8	8	2	2	6	6
Switch Phase						
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0	4.0
Minimum Split (s)	20.0	20.0	20.0	20.0	20.0	20.0
Total Split (s)	15.0	15.0	75.0	75.0	75.0	75.0
Total Split (%)	16.7%	16.7%	83.3%	83.3%	83.3%	83.3%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag						
Lead-Lag Optimize?						
Recall Mode	None	None	None	None	None	None
Act Effect Green (s)	9.1	9.1	16.9	16.9	16.9	16.9
Actuated g/C Ratio	0.30	0.30	0.56	0.56	0.56	0.56
v/c Ratio	0.27	0.13	0.45	0.24	0.16	0.43
Control Delay	12.7	4.9	8.2	1.9	6.8	8.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	12.7	4.9	8.2	1.9	6.8	8.2
LOS	B	A	A	A	A	A
Approach Delay	10.2		6.0		8.0	
Approach LOS	B		A		A	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 30.3

Natural Cycle: 40

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.45

Intersection Signal Delay: 7.4

Intersection LOS: A

Intersection Capacity Utilization 45.8%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 5: Marksheffel Rd & Lorson Blvd



Timings

1: Marksheffel Rd & Fountaine Blvd

2040 Background Traffic

AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	38	379	47	391	1085	579	132	516	160	227	514	45
Future Volume (vph)	38	379	47	391	1085	579	132	516	160	227	514	45
Turn Type	pm+pt	NA	Perm	Prot	NA	Free	pm+pt	NA	Free	Prot	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		4			Free	2		Free			6
Detector Phase	7	4	4	3	8		5	2		1	6	6
Switch Phase												
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0		4.0	4.0	4.0
Minimum Split (s)	9.0	9.0	9.0	9.0	9.0		9.0	9.0		9.0	9.0	9.0
Total Split (s)	11.0	39.0	39.0	14.0	42.0		10.0	26.0		11.0	27.0	27.0
Total Split (%)	12.2%	43.3%	43.3%	15.6%	46.7%		11.1%	28.9%		12.2%	30.0%	30.0%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	2.0	2.0	1.0	2.0		1.0	2.0		1.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Lost Time (s)	4.0	5.0	5.0	4.0	5.0		4.0	5.0		4.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes		Yes	Yes		Yes	Yes	Yes
Recall Mode	None	None	None	None	None		None	None		None	None	None
Act Effect Green (s)	29.9	22.2	22.2	10.5	31.3	75.7	24.1	16.8	75.7	7.3	20.6	20.6
Actuated g/C Ratio	0.39	0.29	0.29	0.14	0.41	1.00	0.32	0.22	1.00	0.10	0.27	0.27
v/c Ratio	0.16	0.37	0.09	0.84	0.78	0.38	0.45	0.69	0.11	0.70	0.56	0.09
Control Delay	11.3	21.3	0.3	53.6	24.9	0.7	24.1	33.6	0.1	50.1	29.2	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.3	21.3	0.3	53.6	24.9	0.7	24.1	33.6	0.1	50.1	29.2	0.4
LOS	B	C	A	D	C	A	C	C	A	D	C	A
Approach Delay		18.3			23.3			25.4			33.5	
Approach LOS		B			C			C			C	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 75.7

Natural Cycle: 60

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.84

Intersection Signal Delay: 25.1


Intersection LOS: C

Intersection Capacity Utilization 69.8%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

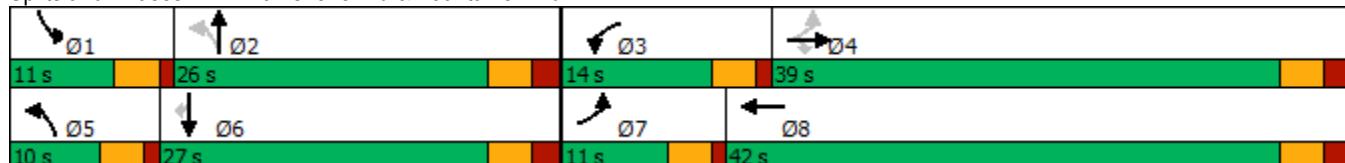

Timings
5: Marksheffel Rd & Lorson Blvd

2040 Background Traffic
AM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑	↑↑	↑	↑	↑↑
Traffic Volume (vph)	360	93	714	115	25	927
Future Volume (vph)	360	93	714	115	25	927
Turn Type	Prot	Perm	NA	Free	pm+pt	NA
Protected Phases	8		2		1	6
Permitted Phases			8	Free		6
Detector Phase	8	8	2		1	6
Switch Phase						
Minimum Initial (s)	4.0	4.0	4.0		4.0	4.0
Minimum Split (s)	20.0	20.0	20.0		9.0	20.0
Total Split (s)	20.0	20.0	60.0		10.0	70.0
Total Split (%)	22.2%	22.2%	66.7%		11.1%	77.8%
Yellow Time (s)	3.0	3.0	3.0		3.0	3.0
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0		5.0	5.0
Lead/Lag			Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None	None	None		None	None
Act Effect Green (s)	10.0	10.0	18.7	40.6	20.1	20.1
Actuated g/C Ratio	0.25	0.25	0.46	1.00	0.50	0.50
v/c Ratio	0.45	0.21	0.46	0.08	0.07	0.60
Control Delay	16.0	5.7	9.5	0.1	5.6	9.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	16.0	5.7	9.5	0.1	5.6	9.1
LOS	B	A	A	A	A	A
Approach Delay	13.9		8.2		9.0	
Approach LOS	B		A		A	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 40.6

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.60

Intersection Signal Delay: 9.7


Intersection LOS: A

Intersection Capacity Utilization 44.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 5: Marksheffel Rd & Lorson Blvd

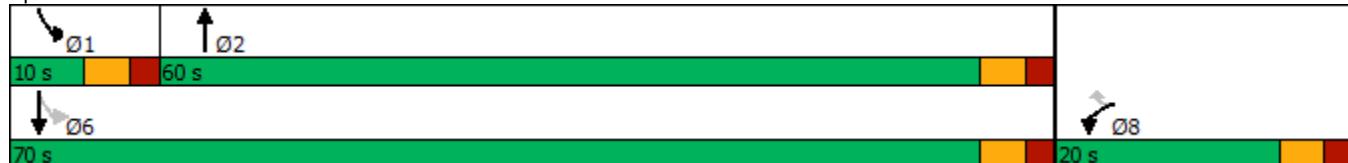

Intersection						
Int Delay, s/veh	0.4					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↗	↘		
Traffic Vol, veh/h	4	116	363	1	0	15
Future Vol, veh/h	4	116	363	1	0	15
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	4	122	382	1	0	16
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	383	0	-	0	513	383
Stage 1	-	-	-	-	383	-
Stage 2	-	-	-	-	130	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1175	-	-	-	521	664
Stage 1	-	-	-	-	689	-
Stage 2	-	-	-	-	896	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1175	-	-	-	519	664
Mov Cap-2 Maneuver	-	-	-	-	580	-
Stage 1	-	-	-	-	687	-
Stage 2	-	-	-	-	896	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.3	0	10.6			
HCM LOS			B			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1175	-	-	-	664	
HCM Lane V/C Ratio	0.004	-	-	-	0.024	
HCM Control Delay (s)	8.1	-	-	-	10.6	
HCM Lane LOS	A	-	-	-	B	
HCM 95th %tile Q(veh)	0	-	-	-	0.1	

Intersection						
Int Delay, s/veh	1.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↑	↗	↖	↗
Traffic Vol, veh/h	7	108	340	156	61	24
Future Vol, veh/h	7	108	340	156	61	24
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	7	114	358	164	64	25
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	522	0	-	0	486	358
Stage 1	-	-	-	-	358	-
Stage 2	-	-	-	-	128	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1044	-	-	-	540	686
Stage 1	-	-	-	-	707	-
Stage 2	-	-	-	-	898	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1044	-	-	-	536	686
Mov Cap-2 Maneuver	-	-	-	-	593	-
Stage 1	-	-	-	-	702	-
Stage 2	-	-	-	-	898	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.5	0	11.4			
HCM LOS			B			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1044	-	-	-	593	686
HCM Lane V/C Ratio	0.007	-	-	-	0.108	0.037
HCM Control Delay (s)	8.5	-	-	-	11.8	10.4
HCM Lane LOS	A	-	-	-	B	B
HCM 95th %tile Q(veh)	0	-	-	-	0.4	0.1

Intersection						
Int Delay, s/veh	0.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↗	↘		
Traffic Vol, veh/h	7	162	473	0	0	23
Future Vol, veh/h	7	162	473	0	0	23
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	7	171	498	0	0	24
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	498	0	-	0	683	498
Stage 1	-	-	-	-	498	-
Stage 2	-	-	-	-	185	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1066	-	-	-	415	572
Stage 1	-	-	-	-	611	-
Stage 2	-	-	-	-	847	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1066	-	-	-	412	572
Mov Cap-2 Maneuver	-	-	-	-	499	-
Stage 1	-	-	-	-	607	-
Stage 2	-	-	-	-	847	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.3	0	11.6			
HCM LOS			B			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1066	-	-	-	572	
HCM Lane V/C Ratio	0.007	-	-	-	0.042	
HCM Control Delay (s)	8.4	-	-	-	11.6	
HCM Lane LOS	A	-	-	-	B	
HCM 95th %tile Q(veh)	0	-	-	-	0.1	

Timings

1: Marksheffel Rd & Fountaine Blvd

2040 Background Traffic

PM Peak Hour

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑	↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	70	1259	140	307	762	445	104	215	489	720	302	65
Future Volume (vph)	70	1259	140	307	762	445	104	215	489	720	302	65
Turn Type	pm+pt	NA	Perm	Prot	NA	Free	pm+pt	NA	Free	Prot	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		4			Free	2		Free			6
Detector Phase	7	4	4	3	8		5	2		1	6	6
Switch Phase												
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0		4.0	4.0	4.0
Minimum Split (s)	9.0	9.0	9.0	9.0	9.0		9.0	9.0		9.0	9.0	9.0
Total Split (s)	11.0	39.0	39.0	14.0	42.0		11.0	14.0		23.0	26.0	26.0
Total Split (%)	12.2%	43.3%	43.3%	15.6%	46.7%		12.2%	15.6%		25.6%	28.9%	28.9%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	2.0	2.0	1.0	2.0		1.0	2.0		1.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Lost Time (s)	4.0	5.0	5.0	4.0	5.0		4.0	5.0		4.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes		Yes	Yes		Yes	Yes	Yes
Recall Mode	None	None	None	None	None		None	None		None	None	None
Act Effect Green (s)	41.6	34.0	34.0	10.0	39.3	89.8	16.6	8.8	89.8	19.0	23.0	23.0
Actuated g/C Ratio	0.46	0.38	0.38	0.11	0.44	1.00	0.18	0.10	1.00	0.21	0.26	0.26
v/c Ratio	0.22	0.96	0.21	0.82	0.52	0.30	0.44	0.65	0.33	1.01	0.35	0.14
Control Delay	11.8	45.0	3.0	57.7	20.6	0.5	26.8	48.6	0.5	73.3	29.6	1.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.8	45.0	3.0	57.7	20.6	0.5	26.8	48.6	0.5	73.3	29.6	1.7
LOS	B	D	A	E	C	A	C	D	A	E	C	A
Approach Delay		39.3			22.0			16.7			56.6	
Approach LOS		D			C			B			E	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 89.8

Natural Cycle: 80

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.01

Intersection Signal Delay: 33.9


Intersection LOS: C

Intersection Capacity Utilization 85.0%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

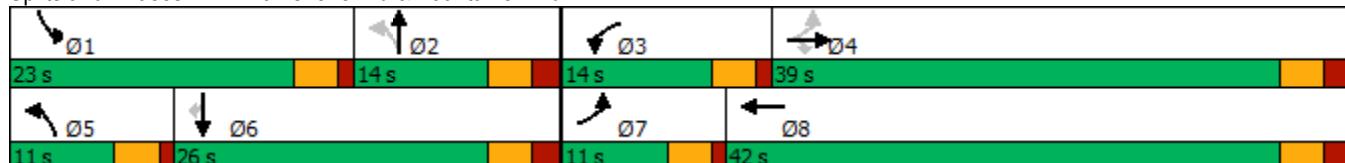

Timings
5: Marksheffel Rd & Lorson Blvd

2040 Background Traffic
PM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑	↑↑	↑	↑	↑↑
Traffic Volume (vph)	254	65	742	410	88	660
Future Volume (vph)	254	65	742	410	88	660
Turn Type	Prot	Perm	NA	Free	pm+pt	NA
Protected Phases	8			2		1
Permitted Phases			8		Free	6
Detector Phase	8	8	2			1
Switch Phase						6
Minimum Initial (s)	4.0	4.0	4.0		4.0	4.0
Minimum Split (s)	20.0	20.0	20.0		9.0	20.0
Total Split (s)	20.0	20.0	60.0		10.0	70.0
Total Split (%)	22.2%	22.2%	66.7%		11.1%	77.8%
Yellow Time (s)	3.0	3.0	3.0		3.0	3.0
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0		5.0	5.0
Lead/Lag			Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None	None	None		None	None
Act Effect Green (s)	9.1	9.1	16.3	43.4	23.7	23.7
Actuated g/C Ratio	0.21	0.21	0.38	1.00	0.55	0.55
v/c Ratio	0.37	0.18	0.59	0.27	0.26	0.39
Control Delay	18.4	7.1	13.4	0.4	6.2	6.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	18.4	7.1	13.4	0.4	6.2	6.0
LOS	B	A	B	A	A	A
Approach Delay	16.1			8.8		6.0
Approach LOS	B		A			A

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 43.4

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.59

Intersection Signal Delay: 8.9


Intersection LOS: A

Intersection Capacity Utilization 45.1%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 5: Marksheffel Rd & Lorson Blvd

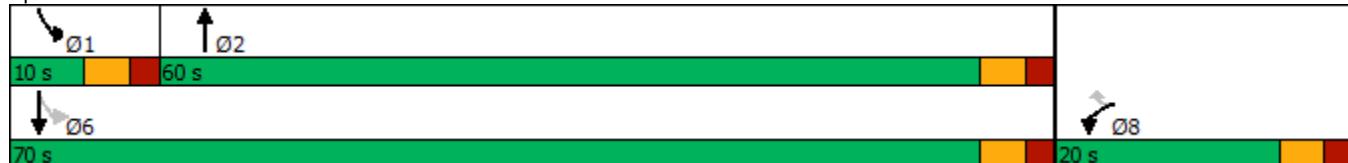

Intersection						
Int Delay, s/veh	0.3					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↗	↘		
Traffic Vol, veh/h	14	401	253	3	0	11
Future Vol, veh/h	14	401	253	3	0	11
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	15	422	266	3	0	12
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	269	0	-	0	720	268
Stage 1	-	-	-	-	268	-
Stage 2	-	-	-	-	452	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1295	-	-	-	395	771
Stage 1	-	-	-	-	777	-
Stage 2	-	-	-	-	641	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1295	-	-	-	390	771
Mov Cap-2 Maneuver	-	-	-	-	489	-
Stage 1	-	-	-	-	768	-
Stage 2	-	-	-	-	641	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.3	0	9.7			
HCM LOS			A			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1295	-	-	-	771	
HCM Lane V/C Ratio	0.011	-	-	-	0.015	
HCM Control Delay (s)	7.8	-	-	-	9.7	
HCM Lane LOS	A	-	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Intersection						
Int Delay, s/veh	5.1					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↑	↗	↖	↗
Traffic Vol, veh/h	27	374	237	116	241	19
Future Vol, veh/h	27	374	237	116	241	19
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	28	394	249	122	254	20
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	371	0	-	0	699	249
Stage 1	-	-	-	-	249	-
Stage 2	-	-	-	-	450	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1188	-	-	-	406	790
Stage 1	-	-	-	-	792	-
Stage 2	-	-	-	-	642	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1188	-	-	-	396	790
Mov Cap-2 Maneuver	-	-	-	-	488	-
Stage 1	-	-	-	-	773	-
Stage 2	-	-	-	-	642	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.5	0	19.3			
HCM LOS			C			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1188	-	-	-	488	790
HCM Lane V/C Ratio	0.024	-	-	-	0.52	0.025
HCM Control Delay (s)	8.1	-	-	-	20.1	9.7
HCM Lane LOS	A	-	-	-	C	A
HCM 95th %tile Q(veh)	0.1	-	-	-	3	0.1

Intersection						
Int Delay, s/veh	0.4					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↗	↘		
Traffic Vol, veh/h	27	589	337	0	0	16
Future Vol, veh/h	27	589	337	0	0	16
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	28	620	355	0	0	17
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	355	0	-	0	1031	355
Stage 1	-	-	-	-	355	-
Stage 2	-	-	-	-	676	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1204	-	-	-	258	689
Stage 1	-	-	-	-	710	-
Stage 2	-	-	-	-	505	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1204	-	-	-	252	689
Mov Cap-2 Maneuver	-	-	-	-	366	-
Stage 1	-	-	-	-	694	-
Stage 2	-	-	-	-	505	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.4	0	10.4			
HCM LOS			B			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	1204	-	-	-	689	
HCM Lane V/C Ratio	0.024	-	-	-	0.024	
HCM Control Delay (s)	8.1	-	-	-	10.4	
HCM Lane LOS	A	-	-	-	B	
HCM 95th %tile Q(veh)	0.1	-	-	-	0.1	

Timings

1: Marksheffel Rd & Fountaine Blvd

2040 Total Traffic

AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	38	390	51	391	1099	582	164	541	160	230	520	45
Future Volume (vph)	38	390	51	391	1099	582	164	541	160	230	520	45
Turn Type	pm+pt	NA	Perm	Prot	NA	Free	pm+pt	NA	Free	Prot	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		4			Free	2		Free			6
Detector Phase	7	4	4	3	8		5	2		1	6	6
Switch Phase												
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0		4.0	4.0	4.0
Minimum Split (s)	9.0	9.0	9.0	9.0	9.0		9.0	9.0		9.0	9.0	9.0
Total Split (s)	11.0	39.0	39.0	14.0	42.0		10.0	26.0		11.0	27.0	27.0
Total Split (%)	12.2%	43.3%	43.3%	15.6%	46.7%		11.1%	28.9%		12.2%	30.0%	30.0%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	2.0	2.0	1.0	2.0		1.0	2.0		1.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Lost Time (s)	4.0	5.0	5.0	4.0	5.0		4.0	5.0		4.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes		Yes	Yes		Yes	Yes	Yes
Recall Mode	None	None	None	None	None		None	None		None	None	None
Act Effect Green (s)	30.3	22.6	22.6	10.4	31.6	76.4	24.5	17.2	76.4	7.3	18.3	18.3
Actuated g/C Ratio	0.40	0.30	0.30	0.14	0.41	1.00	0.32	0.23	1.00	0.10	0.24	0.24
v/c Ratio	0.16	0.38	0.10	0.85	0.79	0.39	0.61	0.71	0.11	0.72	0.65	0.10
Control Delay	11.4	21.4	0.4	54.9	25.3	0.7	31.0	34.4	0.1	51.5	31.6	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.4	21.4	0.4	54.9	25.3	0.7	31.0	34.4	0.1	51.5	31.6	0.4
LOS	B	C	A	D	C	A	C	C	A	D	C	A
Approach Delay		18.3			23.8			27.4			35.5	
Approach LOS		B			C			C			D	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 76.4

Natural Cycle: 60

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.85

Intersection Signal Delay: 26.1


Intersection LOS: C

Intersection Capacity Utilization 72.2%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

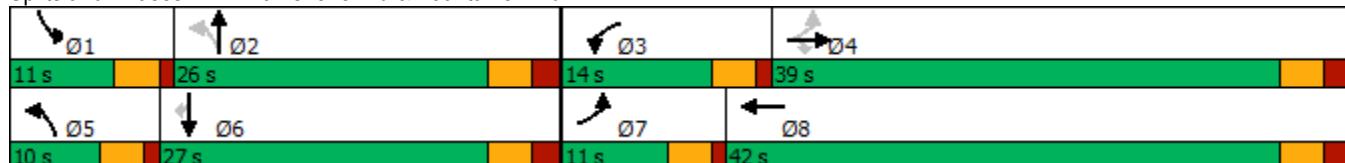

Timings
5: Marksheffel Rd & Lorson Blvd

2040 Total Traffic
AM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑	↑↑	↑	↑	↑↑
Traffic Volume (vph)	400	151	714	128	35	927
Future Volume (vph)	400	151	714	128	35	927
Turn Type	Prot	Perm	NA	Free	pm+pt	NA
Protected Phases	8		2		1	6
Permitted Phases			8	Free	6	
Detector Phase	8	8	2		1	6
Switch Phase						
Minimum Initial (s)	4.0	4.0	4.0		4.0	4.0
Minimum Split (s)	20.0	20.0	20.0		9.0	20.0
Total Split (s)	20.0	20.0	60.0		10.0	70.0
Total Split (%)	22.2%	22.2%	66.7%		11.1%	77.8%
Yellow Time (s)	3.0	3.0	3.0		3.0	3.0
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0		5.0	5.0
Lead/Lag			Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None	None	None		None	None
Act Effect Green (s)	11.0	11.0	18.4	43.1	21.6	21.6
Actuated g/C Ratio	0.26	0.26	0.43	1.00	0.50	0.50
v/c Ratio	0.48	0.30	0.50	0.09	0.10	0.60
Control Delay	17.0	5.5	11.7	0.1	6.1	9.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	17.0	5.5	11.7	0.1	6.1	9.3
LOS	B	A	B	A	A	A
Approach Delay	13.8		9.9		9.1	
Approach LOS	B		A		A	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 43.1

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.60

Intersection Signal Delay: 10.5


Intersection LOS: B

Intersection Capacity Utilization 47.0%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 5: Marksheffel Rd & Lorson Blvd

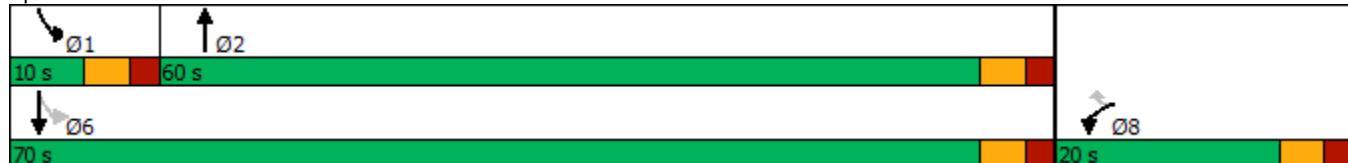

Intersection

Int Delay, s/veh 2.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↔	↔		↔	↔	
Traffic Vol, veh/h	4	122	10	1	372	1	63	1	3	0	10	15
Future Vol, veh/h	4	122	10	1	372	1	63	1	3	0	10	15
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	95	95	95	95	95	95	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	128	11	1	392	1	66	1	3	0	11	16

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	393	0	0	139	0	0	550	537	134	539	542	393
Stage 1	-	-	-	-	-	-	142	142	-	395	395	-
Stage 2	-	-	-	-	-	-	408	395	-	144	147	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1166	-	-	1445	-	-	446	450	915	453	447	656
Stage 1	-	-	-	-	-	-	861	779	-	630	605	-
Stage 2	-	-	-	-	-	-	620	605	-	859	775	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1166	-	-	1445	-	-	426	448	915	449	445	656
Mov Cap-2 Maneuver	-	-	-	-	-	-	426	448	-	449	445	-
Stage 1	-	-	-	-	-	-	858	777	-	628	604	-
Stage 2	-	-	-	-	-	-	594	604	-	852	773	-

Approach	EB	WB			NB			SB					
HCM Control Delay, s	0.2	0			14.8			11.9					
HCM LOS					B			B					
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1					
Capacity (veh/h)	437	1166	-	-	1445	-	-	551					
HCM Lane V/C Ratio	0.161	0.004	-	-	0.001	-	-	0.048					
HCM Control Delay (s)	14.8	8.1	-	-	7.5	-	-	11.9					
HCM Lane LOS	B	A	-	-	A	-	-	B					
HCM 95th %tile Q(veh)	0.6	0	-	-	0	-	-	0.1					

Intersection						
Int Delay, s/veh	1.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↑	↗	↖	↗
Traffic Vol, veh/h	7	117	350	175	66	24
Future Vol, veh/h	7	117	350	175	66	24
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	7	123	368	184	69	25
Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	552	0	-	0	505	368
Stage 1	-	-	-	-	368	-
Stage 2	-	-	-	-	137	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1018	-	-	-	527	677
Stage 1	-	-	-	-	700	-
Stage 2	-	-	-	-	890	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1018	-	-	-	523	677
Mov Cap-2 Maneuver	-	-	-	-	584	-
Stage 1	-	-	-	-	695	-
Stage 2	-	-	-	-	890	-
Approach	EB	WB	SB			
HCM Control Delay, s	0.5	0	11.6			
HCM LOS			B			
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1018	-	-	-	584	677
HCM Lane V/C Ratio	0.007	-	-	-	0.119	0.037
HCM Control Delay (s)	8.6	-	-	-	12	10.5
HCM Lane LOS	A	-	-	-	B	B
HCM 95th %tile Q(veh)	0	-	-	-	0.4	0.1

Intersection

Int Delay, s/veh 1.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↔	↔		↔	↔	
Traffic Vol, veh/h	7	168	8	2	476	0	26	1	4	0	0	23
Future Vol, veh/h	7	168	8	2	476	0	26	1	4	0	0	23
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None									
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	95	95	95	95	95	95	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	7	177	8	2	501	0	27	1	4	0	0	24

Major/Minor	Major1	Major2			Minor1			Minor2				
Conflicting Flow All	501	0	0	185	0	0	712	700	181	703	704	501
Stage 1	-	-	-	-	-	-	195	195	-	505	505	-
Stage 2	-	-	-	-	-	-	517	505	-	198	199	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1063	-	-	1390	-	-	347	363	862	352	361	570
Stage 1	-	-	-	-	-	-	807	739	-	549	540	-
Stage 2	-	-	-	-	-	-	541	540	-	804	736	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1063	-	-	1390	-	-	330	360	862	347	358	570
Mov Cap-2 Maneuver	-	-	-	-	-	-	330	360	-	347	358	-
Stage 1	-	-	-	-	-	-	801	734	-	545	539	-
Stage 2	-	-	-	-	-	-	517	539	-	794	731	-

Approach	EB	WB			NB			SB			
HCM Control Delay, s	0.3	0			16			11.6			
HCM LOS					C			B			
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1			
Capacity (veh/h)	360	1063	-	-	1390	-	-	570			
HCM Lane V/C Ratio	0.091	0.007	-	-	0.002	-	-	0.042			
HCM Control Delay (s)	16	8.4	-	-	7.6	-	-	11.6			
HCM Lane LOS	C	A	-	-	A	-	-	B			
HCM 95th %tile Q(veh)	0.3	0	-	-	0	-	-	0.1			

Intersection						
Int Delay, s/veh	0.6					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑	↑	↑	↑	Y	Y
Traffic Vol, veh/h	132	11	2	449	30	4
Future Vol, veh/h	132	11	2	449	30	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	150	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	139	12	2	473	32	4
Major/Minor	Major1	Major2	Minor1			
Conflicting Flow All	0	0	151	0	622	145
Stage 1	-	-	-	-	145	-
Stage 2	-	-	-	-	477	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1430	-	450	902
Stage 1	-	-	-	-	882	-
Stage 2	-	-	-	-	624	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	1430	-	450	902
Mov Cap-2 Maneuver	-	-	-	-	523	-
Stage 1	-	-	-	-	881	-
Stage 2	-	-	-	-	624	-
Approach	EB	WB	NB			
HCM Control Delay, s	0	0	12			
HCM LOS			B			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	550	-	-	1430	-	
HCM Lane V/C Ratio	0.065	-	-	0.001	-	
HCM Control Delay (s)	12	-	-	7.5	-	
HCM Lane LOS	B	-	-	A	-	
HCM 95th %tile Q(veh)	0.2	-	-	0	-	

Timings

1: Marksheffel Rd & Fountaine Blvd

2040 Total Traffic

PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (vph)	70	1299	152	307	772	447	126	233	489	731	323	65
Future Volume (vph)	70	1299	152	307	772	447	126	233	489	731	323	65
Turn Type	pm+pt	NA	Perm	Prot	NA	Free	pm+pt	NA	Free	Prot	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		4			Free	2		Free			6
Detector Phase	7	4	4	3	8		5	2		1	6	6
Switch Phase												
Minimum Initial (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0		4.0	4.0	4.0
Minimum Split (s)	9.0	9.0	9.0	9.0	9.0		9.0	9.0		9.0	9.0	9.0
Total Split (s)	11.0	39.0	39.0	14.0	42.0		11.0	14.0		23.0	26.0	26.0
Total Split (%)	12.2%	43.3%	43.3%	15.6%	46.7%		12.2%	15.6%		25.6%	28.9%	28.9%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	2.0	2.0	1.0	2.0		1.0	2.0		1.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Lost Time (s)	4.0	5.0	5.0	4.0	5.0		4.0	5.0		4.0	5.0	5.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes		Yes	Yes		Yes	Yes	Yes
Recall Mode	None	None	None	None	None		None	None		None	None	None
Act Effect Green (s)	41.6	34.0	34.0	10.0	39.3	89.9	16.8	8.9	89.9	19.0	21.0	21.0
Actuated g/C Ratio	0.46	0.38	0.38	0.11	0.44	1.00	0.19	0.10	1.00	0.21	0.23	0.23
v/c Ratio	0.22	0.99	0.23	0.82	0.53	0.30	0.54	0.70	0.33	1.03	0.41	0.15
Control Delay	11.8	51.6	3.6	57.9	20.7	0.5	30.5	50.9	0.5	77.5	31.1	1.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.8	51.6	3.6	57.9	20.7	0.5	30.5	50.9	0.5	77.5	31.1	1.8
LOS	B	D	A	E	C	A	C	D	A	E	C	A
Approach Delay		44.8			22.0			18.8			59.3	
Approach LOS		D			C			B			E	

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 89.9

Natural Cycle: 90

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 1.03

Intersection Signal Delay: 36.6


Intersection LOS: D

Intersection Capacity Utilization 87.0%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 1: Marksheffel Rd & Fountaine Blvd

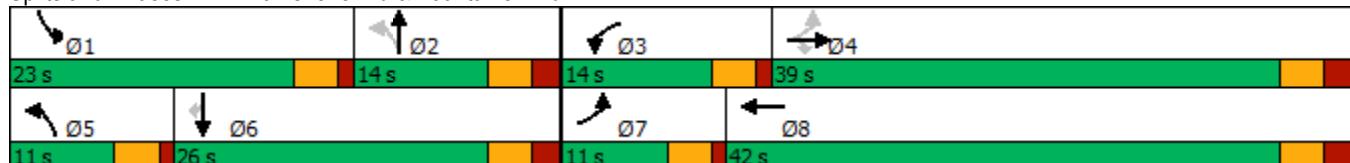

Timings
5: Marksheffel Rd & Lorson Blvd

2040 Total Traffic
PM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑↑	↑	↑↑	↑	↑	↑↑
Traffic Volume (vph)	282	105	742	456	123	660
Future Volume (vph)	282	105	742	456	123	660
Turn Type	Prot	Perm	NA	Free	pm+pt	NA
Protected Phases	8			2		1
Permitted Phases			8		Free	6
Detector Phase	8	8	2			1
Switch Phase						6
Minimum Initial (s)	4.0	4.0	4.0		4.0	4.0
Minimum Split (s)	20.0	20.0	20.0		9.0	20.0
Total Split (s)	20.0	20.0	60.0		10.0	70.0
Total Split (%)	22.2%	22.2%	66.7%		11.1%	77.8%
Yellow Time (s)	3.0	3.0	3.0		3.0	3.0
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0		5.0	5.0
Lead/Lag			Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None	None	None		None	None
Act Effect Green (s)	9.5	9.5	17.0	44.5	24.4	24.4
Actuated g/C Ratio	0.21	0.21	0.38	1.00	0.55	0.55
v/c Ratio	0.40	0.26	0.58	0.30	0.36	0.39
Control Delay	18.6	6.5	13.4	0.5	7.5	6.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	18.6	6.5	13.4	0.5	7.5	6.2
LOS	B	A	B	A	A	A
Approach Delay	15.3			8.5		6.4
Approach LOS	B		A			A

Intersection Summary

Cycle Length: 90

Actuated Cycle Length: 44.5

Natural Cycle: 50

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.58

Intersection Signal Delay: 8.9


Intersection LOS: A

Intersection Capacity Utilization 47.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 5: Marksheffel Rd & Lorson Blvd

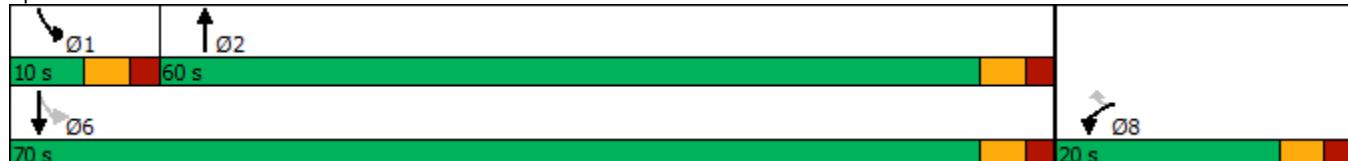

Intersection																			
Int Delay, s/veh	2.2																		
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR							
Lane Configurations	↑	↑		↑	↑		↔	↔		↔	↔								
Traffic Vol, veh/h	14	410	37	0	259	3	44	0	0	0	36	11							
Future Vol, veh/h	14	410	37	0	259	3	44	0	0	0	36	11							
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0							
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop							
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None							
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-							
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-							
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-							
Peak Hour Factor	95	95	95	95	95	95	95	95	95	95	95	95							
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2							
Mvmt Flow	15	432	39	0	273	3	46	0	0	0	38	12							
Major/Minor																			
Major1		Major2			Minor1			Minor2											
Conflicting Flow All	276	0	0	471	0	0	782	758	452	757	776	275							
Stage 1	-	-	-	-	-	-	482	482	-	275	275	-							
Stage 2	-	-	-	-	-	-	300	276	-	482	501	-							
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22							
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-							
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-							
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318							
Pot Cap-1 Maneuver	1287	-	-	1091	-	-	312	336	608	324	328	764							
Stage 1	-	-	-	-	-	-	565	553	-	731	683	-							
Stage 2	-	-	-	-	-	-	709	682	-	565	543	-							
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-							
Mov Cap-1 Maneuver	1287	-	-	1091	-	-	277	332	608	321	324	764							
Mov Cap-2 Maneuver	-	-	-	-	-	-	277	332	-	321	324	-							
Stage 1	-	-	-	-	-	-	558	546	-	722	683	-							
Stage 2	-	-	-	-	-	-	660	682	-	558	536	-							
Approach																			
EB			WB			NB			SB										
HCM Control Delay, s	0.2		0			20.6			16.1										
HCM LOS	C						C												
Minor Lane/Major Mvmt																			
NBLn1		EBL	EBT	EBR	WBL	WBT	WBR	SBLn1											
Capacity (veh/h)	277	1287	-	-	1091	-	-	374											
HCM Lane V/C Ratio	0.167	0.011	-	-	-	-	-	0.132											
HCM Control Delay (s)	20.6	7.8	-	-	0	-	-	16.1											
HCM Lane LOS	C	A	-	-	A	-	-	C											
HCM 95th %tile Q(veh)	0.6	0	-	-	0	-	-	0.5											

Intersection

Int Delay, s/veh 5.9

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↑	↑	↗	↖	↗
Traffic Vol, veh/h	27	384	243	130	264	19
Future Vol, veh/h	27	384	243	130	264	19
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	150	-	-	150	0	0
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	28	404	256	137	278	20

Major/Minor	Major1	Major2	Minor2			
Conflicting Flow All	393	0	-	0	716	256
Stage 1	-	-	-	-	256	-
Stage 2	-	-	-	-	460	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1166	-	-	-	397	783
Stage 1	-	-	-	-	787	-
Stage 2	-	-	-	-	636	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	1166	-	-	-	387	783
Mov Cap-2 Maneuver	-	-	-	-	481	-
Stage 1	-	-	-	-	768	-
Stage 2	-	-	-	-	636	-

Approach	EB	WB	SB
HCM Control Delay, s	0.5	0	21.4
HCM LOS		C	

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	SBLn2
Capacity (veh/h)	1166	-	-	-	481	783
HCM Lane V/C Ratio	0.024	-	-	-	0.578	0.026
HCM Control Delay (s)	8.2	-	-	-	22.2	9.7
HCM Lane LOS	A	-	-	-	C	A
HCM 95th %tile Q(veh)	0.1	-	-	-	3.6	0.1

Intersection																			
Int Delay, s/veh	0.8																		
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR							
Lane Configurations	↑	↑		↑	↑		↔	↔		↔	↔								
Traffic Vol, veh/h	27	589	31	1	338	0	19	0	1	0	0	16							
Future Vol, veh/h	27	589	31	1	338	0	19	0	1	0	0	16							
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0							
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop							
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None							
Storage Length	150	-	-	150	-	-	-	-	-	-	-	-							
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-							
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-							
Peak Hour Factor	95	95	95	95	95	95	95	95	95	95	95	95							
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2							
Mvmt Flow	28	620	33	1	356	0	20	0	1	0	0	17							
Major/Minor																			
Major1		Major2			Minor1			Minor2											
Conflicting Flow All	356	0	0	653	0	0	1060	1051	637	1051	1067	356							
Stage 1	-	-	-	-	-	-	693	693	-	358	358	-							
Stage 2	-	-	-	-	-	-	367	358	-	693	709	-							
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22							
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-							
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-							
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318							
Pot Cap-1 Maneuver	1203	-	-	934	-	-	202	227	477	205	222	688							
Stage 1	-	-	-	-	-	-	434	445	-	660	628	-							
Stage 2	-	-	-	-	-	-	653	628	-	434	437	-							
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-							
Mov Cap-1 Maneuver	1203	-	-	934	-	-	193	222	477	201	217	688							
Mov Cap-2 Maneuver	-	-	-	-	-	-	193	222	-	201	217	-							
Stage 1	-	-	-	-	-	-	424	435	-	645	627	-							
Stage 2	-	-	-	-	-	-	636	627	-	423	427	-							
Approach																			
EB			WB			NB			SB										
HCM Control Delay, s	0.3		0			25.2			10.4										
HCM LOS	D						B												
Minor Lane/Major Mvmt																			
Capacity (veh/h)	199	1203	-	-	934	-	-	-	688										
HCM Lane V/C Ratio	0.106	0.024	-	-	0.001	-	-	-	0.024										
HCM Control Delay (s)	25.2	8.1	-	-	8.9	-	-	-	10.4										
HCM Lane LOS	D	A	-	-	A	-	-	-	B										
HCM 95th %tile Q(veh)	0.3	0.1	-	-	0	-	-	-	0.1										

Intersection						
Int Delay, s/veh	0.4					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑	↑	↑	↑		
Traffic Vol, veh/h	460	40	1	314	22	1
Future Vol, veh/h	460	40	1	314	22	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	150	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	484	42	1	331	23	1
Major/Minor	Major1	Major2	Minor1			
Conflicting Flow All	0	0	526	0	838	505
Stage 1	-	-	-	-	505	-
Stage 2	-	-	-	-	333	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1041	-	336	567
Stage 1	-	-	-	-	606	-
Stage 2	-	-	-	-	726	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	1041	-	336	567
Mov Cap-2 Maneuver	-	-	-	-	452	-
Stage 1	-	-	-	-	605	-
Stage 2	-	-	-	-	726	-
Approach	EB	WB	NB			
HCM Control Delay, s	0	0	13.3			
HCM LOS			B			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	456	-	-	1041	-	
HCM Lane V/C Ratio	0.053	-	-	0.001	-	
HCM Control Delay (s)	13.3	-	-	8.5	-	
HCM Lane LOS	B	-	-	A	-	
HCM 95th %tile Q(veh)	0.2	-	-	0	-	

