

revise to Master traffic Impact Study

Title not updated, per Section B.1.1.A of El Paso County's ECM, this development doesn't meet the definition of a Master TIS and instead meets the definition of an Individual Site TIS and Full TIS.

Insert "PCD Number P264".

PCD File Number added to the report.

TRAFFIC IMPACT STUDY

For

Highway 24 Multifamily Rezone
El Paso County, Colorado

January 2026

Prepared for:

James Kyle
213 Tonn Valley
Evergreen, Colorado 80439

Prepared by:



SM ROCHA, LLC
TRAFFIC & TRANSPORTATION ENGINEERING

8700 Turnpike Drive, Suite 240
Westminster, Colorado 80031
(303) 458-9798

6 South Tejon Street, Suite 618
Colorado Springs, Colorado 80903
(719) 203-6639

Project Manager / Engineer:
Zac Trotter, EIT

Engineer in Responsible Charge:
Fred Lantz, PE



Traffic Engineer's Statement

The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.



Fred Lantz, P.E. #23410

01/21/2026

Date

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.



James Kyle
213 Tonn Valley
Evergreen, Colorado 80439

1/21/26

Date

Table of Contents

I. Introduction 1

 Project Overview..... 1

 Study Area Boundaries 1

 Site Description..... 1

 Existing and Committed Surface Transportation Network.....3

II. Existing Traffic Conditions 5

 Peak Hour Intersection Levels of Service – Existing Traffic.....7

 Existing Traffic Analysis Results7

III. Future Traffic Conditions Without Proposed Development.....8

 Peak Hour Intersection Levels of Service – Background Traffic 11

 Background Traffic Analysis Results – Year 2028 11

 Background Traffic Analysis Results – Year 2045 12

IV. Proposed Project Traffic 13

 Trip Generation..... 13

 Adjustments to Trip Generation Rates 14

 Trip Distribution..... 14

 Trip Assignment..... 14

V. Future Traffic Conditions With Proposed Development..... 16

 Total Traffic Auxiliary Lane Analysis 16

 Peak Hour Intersection Levels of Service – Total Traffic 19

 Total Traffic Analysis Results Upon Development Build-Out 20

VI. Project Impacts 21

 Queue Length Analysis..... 21

 Development Impacts 22

 Recommended Improvements 23

VII. Conclusion 24

List of Figures

Figure 1 – Location.....2
Figure 2 – Existing Traffic Volumes & Intersection Geometry6
Figure 3 – Background Traffic Volumes & Intersection Geometry – Year 2028.....9
Figure 4 – Background Traffic Volumes & Intersection Geometry – Year 2045.....10
Figure 5 – Distribution and Site-Generated Assignment.....15
Figure 6 – Total Traffic Volumes & Intersection Geometry – Year 2028.....17
Figure 7 – Total Traffic Volumes & Intersection Geometry – Year 2045.....18

List of Tables

Table 1 – Intersection Capacity Analysis Summary – Existing Traffic7
Table 2 – Intersection Capacity Analysis Summary – Background Traffic – Year 202811
Table 3 – Intersection Capacity Analysis Summary – Background Traffic – Year 204511
Table 4 – Trip Generation Rates13
Table 5 – Trip Generation Summary14
Table 6 – Intersection Capacity Analysis Summary – Total Traffic – Year 202819
Table 7 – Intersection Capacity Analysis Summary – Total Traffic – Year 204519
Table 8 – Turn Lane Queues and Storage Requirements – Year 2045.....22

Appendices

APPENDIX A TRAFFIC COUNT DATA
 SIGNAL TIMING INFORMATION
APPENDIX B LEVEL OF SERVICE DEFINITIONS
APPENDIX C CAPACITY WORKSHEETS

I. Introduction

Project Overview

This traffic impact study is provided as a planning document and addresses the capacity, geometric, and control requirements associated with the development entitled 12057 Highway 24 Multifamily Rezone. This analysis was prepared in accordance with Appendix B of the County's Engineering Criteria Manual (ECM)¹.

This proposed development consists of a multifamily residential community and is located to the northeast of U.S. Highway 24 and Meridian Road in El Paso County, Colorado.

Study Area Boundaries

The study area to be examined in this analysis encompasses the U.S. Highway 24 intersections with Meridian Road, Old Meridian Road, and E Woodmen Road and includes the proposed site access.

Figure 1 illustrates location of the site and study intersections.

Site Description

Land for the development is currently occupied by one single-family detached home and zoned as Residential Rural (RR-5). The area is surrounded by commercial, industrial, institutional, and residential land uses.

Please clarify from whom?

The proposed development will rezone the approximate 13.48 acre site to Resid **Clarification Added.** (RM-30), a zoning district intended to accommodate moderate density multi-dwelling development. It is further understood, through client coordination, that CDOT will acquire an approximate 1.66 acres of right-of-way for U.S. Highway 24. Therefore, for purposes of this analysis, there is assumed to be construction for approximately 349 multifamily dwelling units.

Proposed access to the development is provided via one-full movement access onto U.S. Highway 24 (referred to as Site Access).

For purposes of this study, it is anticipated that development construction would be completed by end of Year 2028.

General site and access locations are shown on Figure 1.

¹ El Paso County Engineering Criteria Manual, El Paso County, January 2025.



Not to Scale



12057 HIGHWAY 24 MULTIFAMILY REZONE

Traffic Impact Study

SM ROCHA, LLC

Traffic & Transportation Engineering

Figure 1
SITE LOCATION

January 2026

Page 2

Existing and Committed Surface Transportation Network

Within the study area, U.S. Highway 24 is the primary roadway that will accommodate traffic to and from the proposed development. The secondary roadways include Meridian Road, Old Meridian Road, and E Woodmen Road. A brief description of each roadway, based on El Paso County’s ECM and Major Transportation Corridor Plan (MTCP)² and the City of Colorado Springs Major Thoroughfare Plan (MTP)³, is provided below:

U.S. Highway 24 is a generally a north-south state roadway having two through lanes (one lane in each direction) with exclusive turn lanes at the intersections within the study area. The Colorado Department of Transportation (CDOT) categorizes the adjacent segment of U.S. Highway 24 as an Expressway (E-X) and provides a posted speed limit of 55 MPH.

Meridian Road is generally an east-west roadway within the study area having two through lanes (two lanes in each direction) with exclusive turn lanes at the intersection within the study area. El Paso County defines Meridian Road as a minor collector roadway north of U.S. Highway 24 while Colorado Springs defines Meridian Road as a major collector roadway south of U.S. Highway 24. Meridian Road provides a posted speed limit of 35 MPH.

Use "Urban - Minor Arterial DIVIDED"

Discussion updated, please know that divided is not part of the roadway classification. Instead text has been updated to indicate the roadway is divided.

Old Meridian Road is a generally an east-west urban major collector roadway having a three-lane cross section (two through lanes and one turn lane) with a posted speed limit of 35 MPH. Old Meridian Road is a major collector roadway within the study area.

Please verify review comment, within the study area, the El Paso County MTCP indicates that E Woodmen Road provides an expressway classification.

Include classification "Urban - Principal Arterial".

E Woodmen Road is generally an east-west expressway roadway having four through lanes (two lanes in each direction) with exclusive turn lanes at the intersection within the study area. E Woodmen Road provides a posted speed limit of 45 MPH.

The U.S. Highway 24 intersections with Meridian Road and E Woodmen Road are signalized. All other study intersections operate under a stop-controlled condition. A stop-controlled intersection is defined as a roadway intersection where vehicle rights-of-way are controlled by one or more “STOP” signs.

Pursuant to the U.S. Highway 24 – Garrett Road to Woodmen Road Traffic and Safety Report⁴, it was recommended that various intersection improvements are made to the U.S. Highway 24 intersections with Meridian Road and E Woodmen Road as well as U.S. Highway 24 be widened from two to four through lanes north of Garrett Road. This widening was recommended to occur by Year 2027.

² El Paso County Major Transportation Corridors Plan, Felsburg Holt & Ullevig, July 18, 2024.

³ City of Colorado Springs Major Thoroughfare Plan, City of Colorado Springs, Department of Public Works, May 16, 2025.

⁴ U.S. Highway 24 – Garrett Road to Woodmen Road Traffic and Safety Report, HDR, Inc., August 2024.

Additionally, pursuant to El Paso County's MTCP, E Woodmen Road is planned to be widened from four to six through lanes. This widening is planned to be completed by Year 2045.

No other regional or specific improvements for the above-described roadways are known to be planned or committed at this time.

II. Existing Traffic Conditions

Morning (AM) and afternoon (PM) peak hour traffic counts were collected at the U.S. Highway 24 intersections with Meridian Road, Old Meridian Road, and E Woodmen Road. Average daily traffic (ADT) volumes were collected over a 24-hour period on U.S. Highway 24. Counts were collected on Tuesday, December 16, 2025, with AM peak hour counts being collected during the period of 7:00 a.m. to 9:00 a.m. and PM peak hour counts being collected during the period of 4:00 p.m. to 6:00 p.m.

Existing volumes and intersection geometry are shown in Figure 2. Traffic count data is included for reference in Appendix A.

Existing signal timing parameters for the U.S. Highway 24 intersections with Meridian Road and E Woodmen Road were obtained from CDOT and used throughout this study to the best extent possible in order to remain consistent with existing signal coordination plans. CDOT signal timing information received is included for reference in Appendix A.



identify why Meridian and woodmen and Rolling Thunder/Meridian Road where not included in the study area. If thresholds per criteria are not met, then please state that.

The Meridian Road intersections with Rolling Thunder Way and Woodmen Road were not included as this development is not expected to affect these intersections by 10 percent or greater. Discussion added to the report.

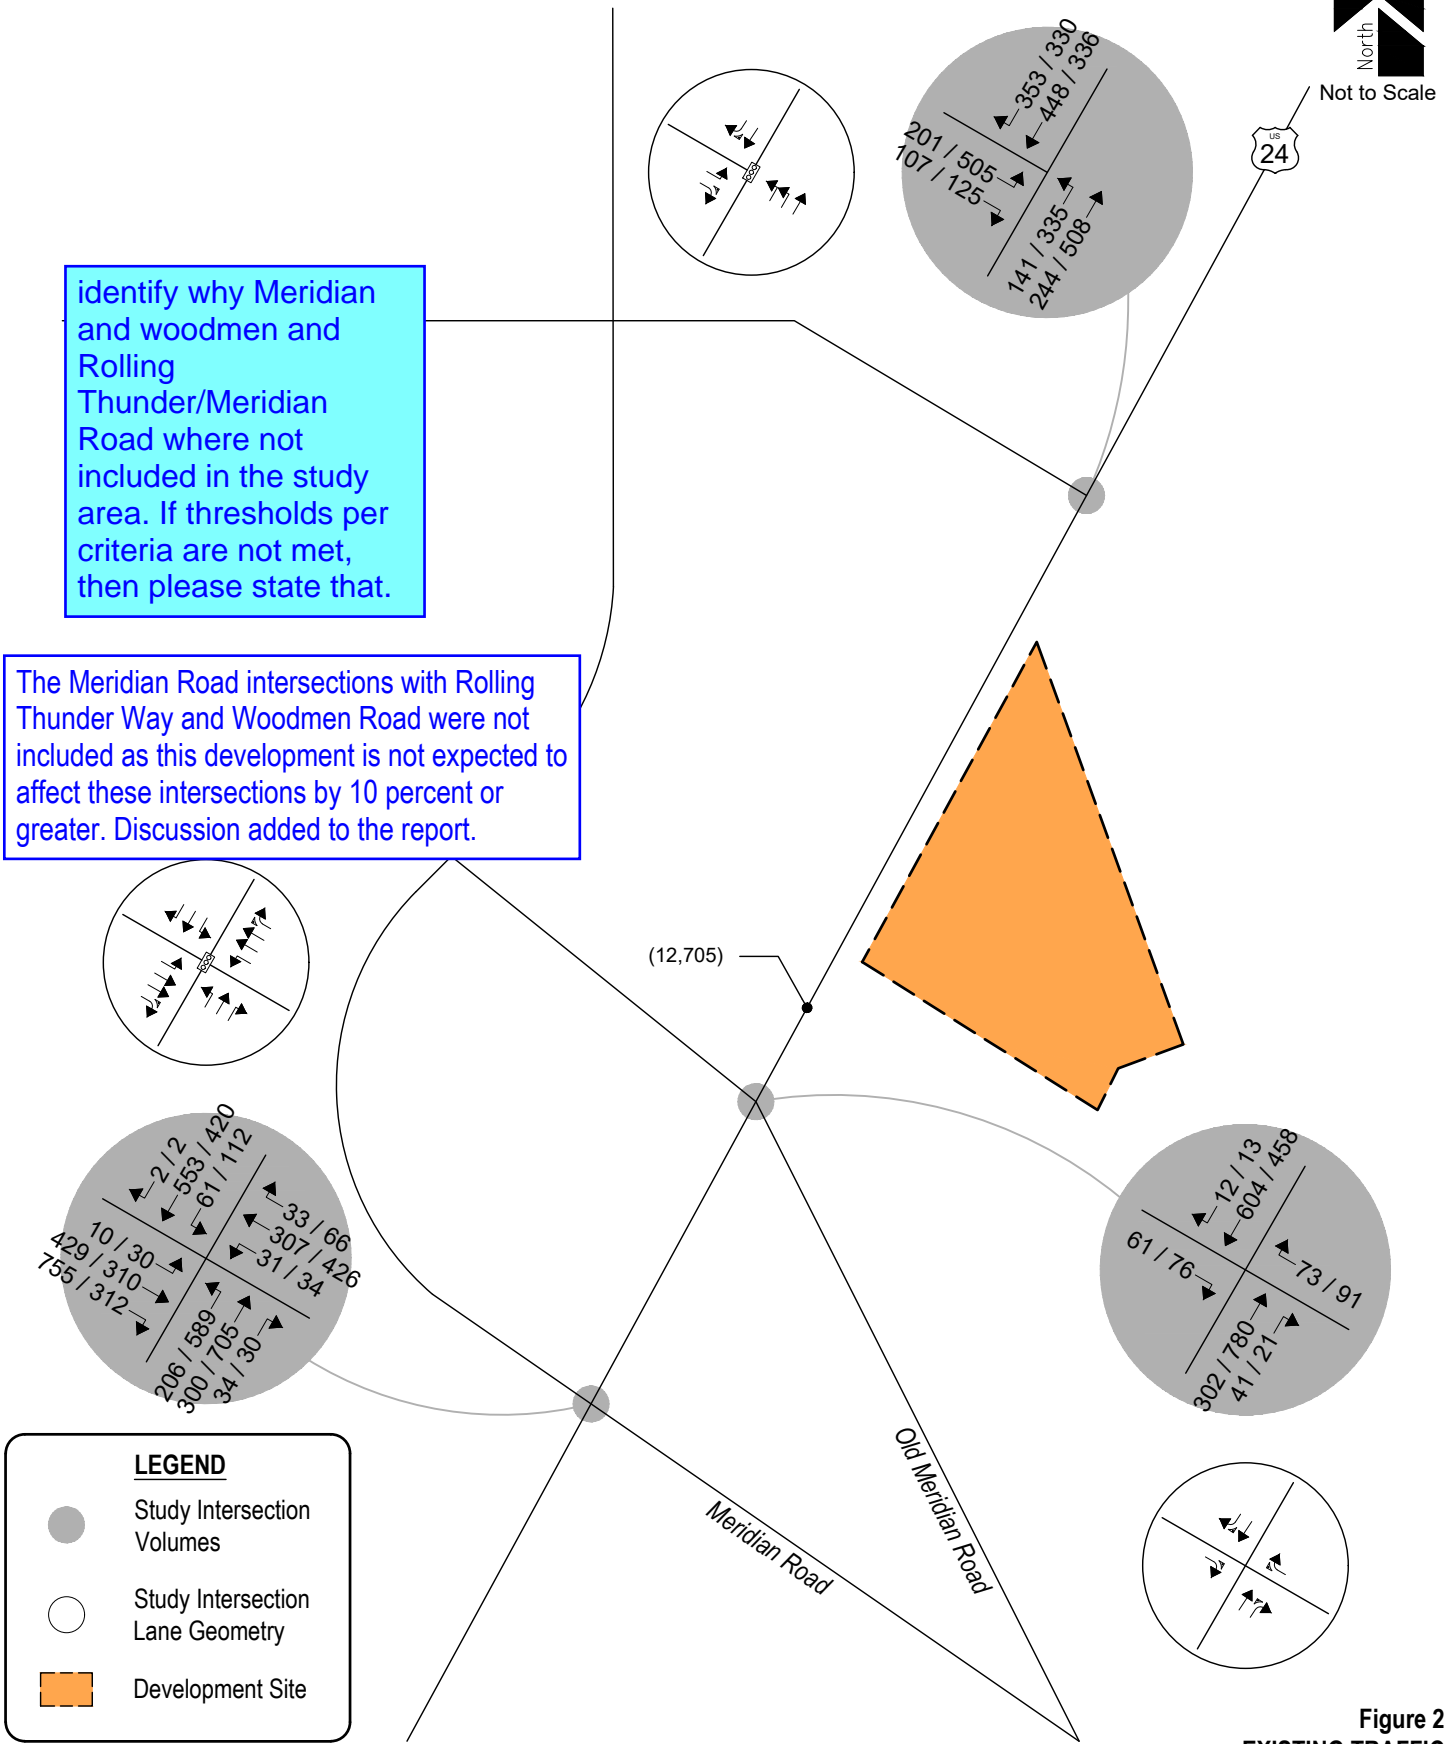


Figure 2
EXISTING TRAFFIC
Volumes & Intersection Geometry
AM / PM Peak Traffic Hour
(ADT) : Average Daily Traffic

Peak Hour Intersection Levels of Service – Existing Traffic

The Signalized and Unsignalized Intersection Analysis techniques, as published in the Highway Capacity Manual (HCM), 7th Edition, by the Transportation Research Board and as incorporated into the SYNCHRO computer program, were used to analyze the study intersections for existing and future traffic conditions. These nationally accepted techniques allow for the determination of intersection level of service (LOS) based on the congestion and delay of each traffic movement.

Pursuant to Section B.4.1.A of the County’s ECM, the design objective for each scenario of this study shall be level of service “D”. Level of service is a method of measurement used by transportation professionals to quantify a driver’s perception of travel conditions that include travel time, number of stops, and total amount of stopped delay experienced on a roadway network. The HCM categorizes level of service into a range from “A” which indicates little, if any, vehicle delay, to “F” which indicates a level of operation considered unacceptable to most drivers. These levels of service grades with brief descriptions of the operating condition, for unsignalized and signalized intersections, are included for reference in Appendix B and have been used throughout this study.

The level of service analyses results for existing conditions are summarized in Table 1.

Intersection capacity worksheets developed for this study are provided in Appendix C.

Table 1 – Intersection Capacity Analysis Summary – Existing Traffic

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
U.S. Highway 24 / Meridian Road (Signalized)	C (23.8)	D (35.8)
U.S. Highway 24 / E Woodmen Road (Signalized)	B (16.2)	C (28.7)

Key: Signalized Intersection: Level of Service (Control Delay in sec/v eh)

Existing Traffic Analysis Results

Under existing conditions, operational analysis shows that the signalized intersection of U.S. Highway 24 and Meridian Road provides overall operations at LOS C during the morning peak traffic hour and LOS D during the afternoon peak traffic hour.

The signalized intersection of U.S. Highway 24 and E Woodmen Road provides overall operations at LOS B during the morning peak traffic hour and LOS C during the afternoon peak traffic hour.

Considering the existing intersection of U.S. Highway 24 with Old Meridian Road provides right-turn acceleration lanes for each direction, all movements are expected to operate as free-flow and therefore are not expected to experience any delay or queueing.

III. Future Traffic Conditions Without Proposed Development

Background traffic is the traffic projected to be on area roadways without consideration of the proposed development. Background traffic includes traffic generated by development of vacant parcels in the area.

To account for projected increases in background traffic for Years 2028 and 2045, a compounded annual growth rate was determined using historical traffic data for the surrounding area provided by CDOT's Online Transportation Information System (OTIS) along the adjacent segment of U.S. Highway 24, which anticipates a 20-year growth rate between one and two percent. Therefore, in order to provide for a conservative analysis, a growth rate of approximately two percent was applied to existing traffic volumes.

Pursuant to the area roadway improvements discussed in Section I, Year 2028 background traffic conditions assumes that U.S. Highway 24 is widened from two to four through lanes and that intersection geometry matches that analyzed within the U.S. Highway 24 – Garrett Road to Woodmen Road Traffic and Safety Report. Year 2045 background traffic conditions assumes that E Woodmen Road is widened from four to six through lanes. Years 2028 and 2045 assume existing signal timing parameters for the U.S. Highway 24 intersections with Meridian Road and E Woodmen Road with optimized intersection splits in effort to better intersection performance.

Projected background traffic volumes and intersection geometry for Years 2028 and 2045 are shown in Figure 3 and Figure 4, respectively.

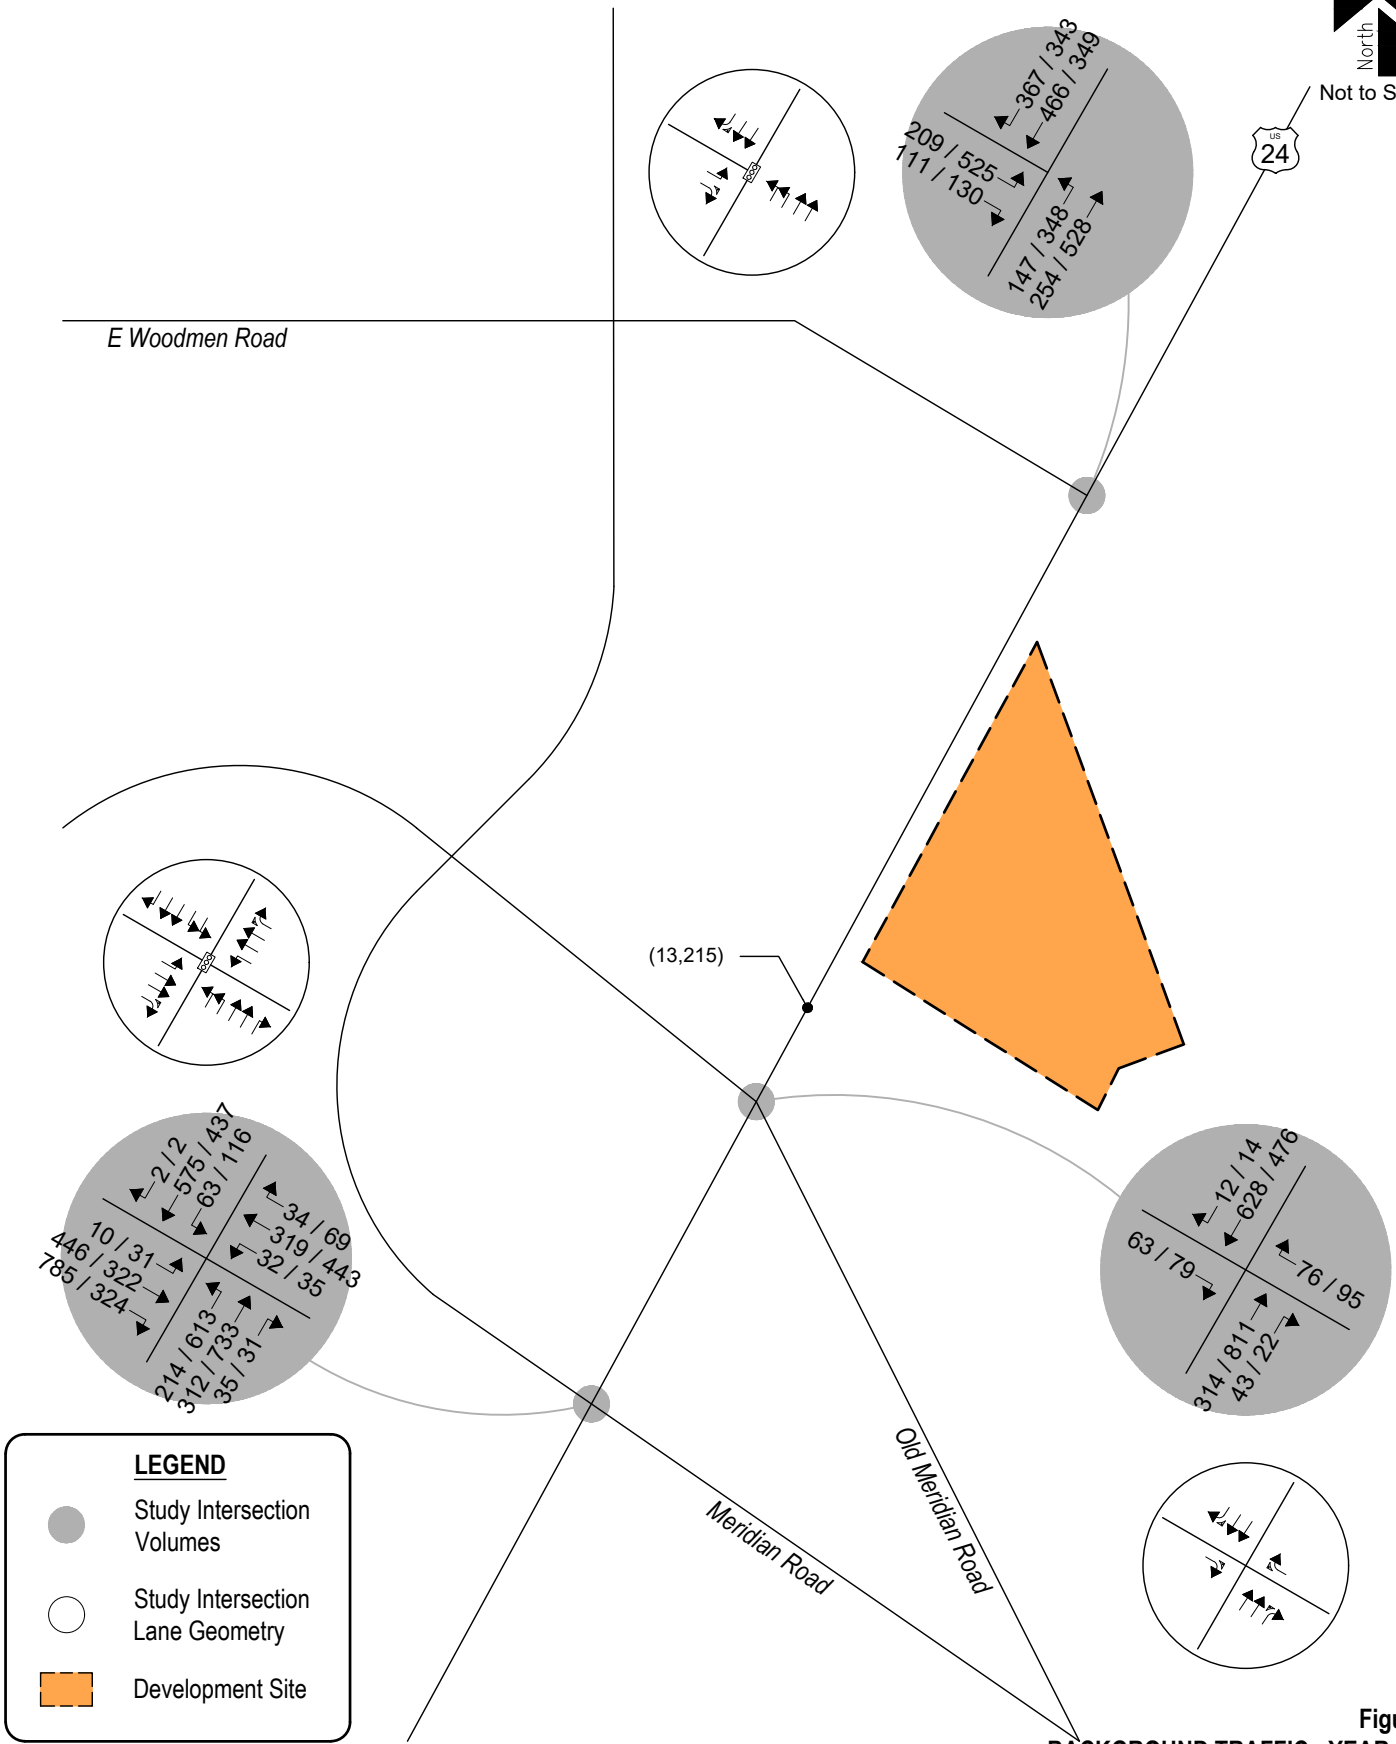


Figure 3
BACKGROUND TRAFFIC - YEAR 2028
 Volumes & Intersection Geometry
 AM / PM Peak Traffic Hour
 (ADT) : Average Daily Traffic





This appears low in comparison to other traffic studies in the area. Please be sure to account for other developments in the area specifically Falcon Field development at Woodmen/Hwy 24 (PCD File No. SP232, SF2435). Update the analysis as necessary.

Falcon Field development added, please know that due to EDARP limitations it is difficult to find every study within a certain development area. If further traffic studies are requested to be considered, please provide where necessary.

this will be a 4 leg intersection with the falcon field project. Revise accordingly

Study updated to match the Falcon Fields traffic study.

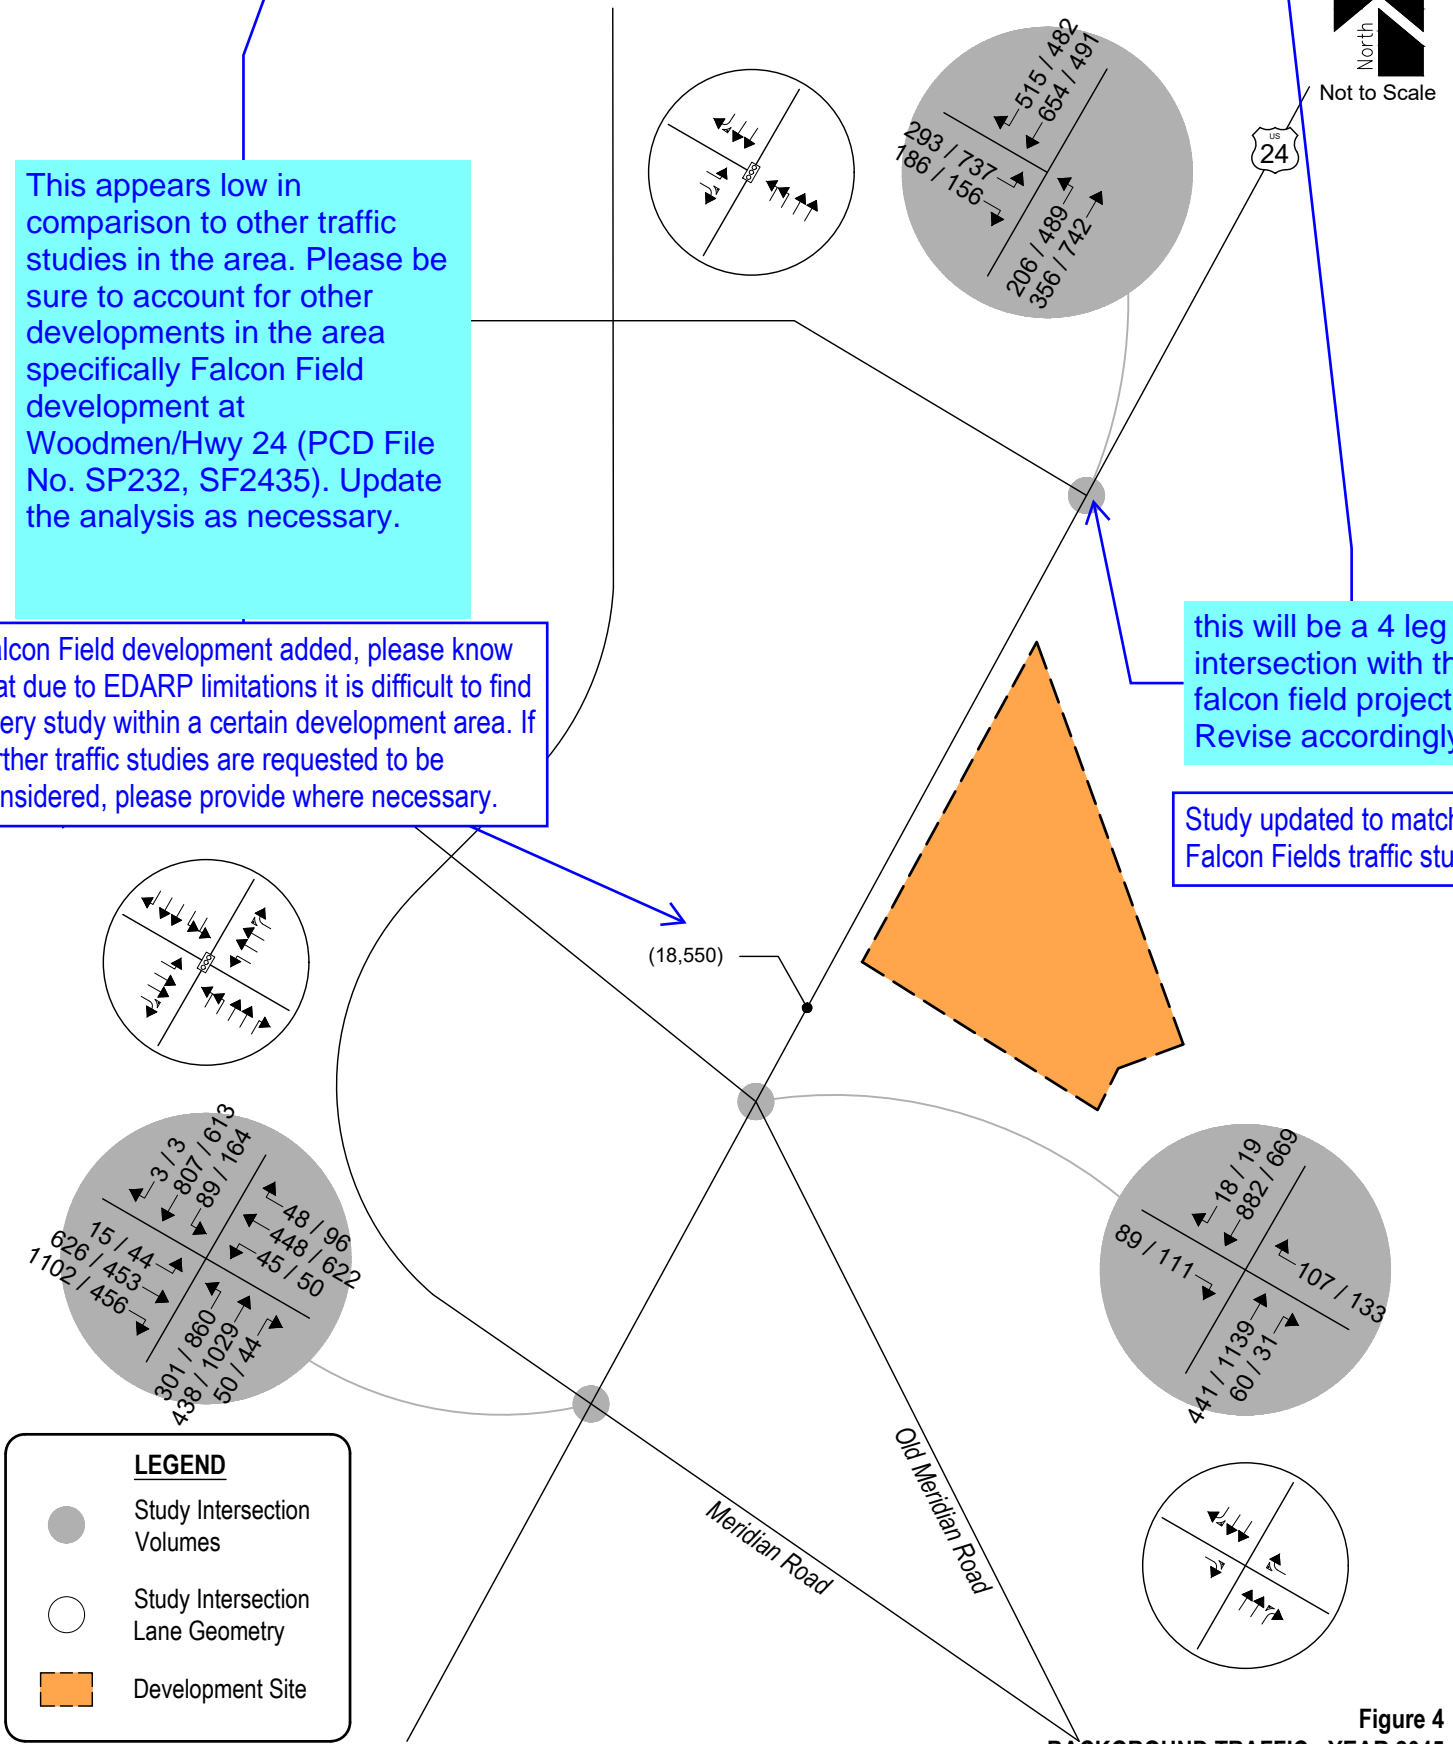


Figure 4
BACKGROUND TRAFFIC - YEAR 2045
Volumes & Intersection Geometry
AM / PM Peak Traffic Hour
(ADT) : Average Daily Traffic

Peak Hour Intersection Levels of Service – Background Traffic

As with existing traffic conditions, the operations of study intersections were analyzed under background conditions, without the proposed development, using the SYNCHRO computer program.

Background traffic level of service analysis results for Year 2028 are listed in Table 2. Year 2045 operational results are summarized in Table 3.

Definitions of levels of service are given in Appendix B. Intersection capacity worksheets are provided in Appendix C.

Table 2 – Intersection Capacity Analysis Summary – Background Traffic – Year 2028

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
U.S. Highway 24 / Meridian Road (Signalized)	C (27.2)	D (36.5)
U.S. Highway 24 / E Woodmen Road (Signalized)	B (18.6)	C (30.6)

Key: Signalized Intersection: Level of Service (Control Delay in sec/v eh)

Background Traffic Analysis Results – Year 2028

Year 2028 background traffic analysis indicates that the signalized intersection of U.S. Highway 24 and Meridian Road is expected to provide overall operations at LOS C during the morning peak traffic hour and LOS D during the afternoon peak traffic hour.

The signalized intersection of U.S. Highway 24 and E Woodmen Road has overall operations at LOS B during the morning peak traffic hour and LOS C during the afternoon peak traffic hour.

Table 3 – Intersection Capacity Analysis Summary – Background Traffic – Year 2045

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
U.S. Highway 24 / Meridian Road (Signalized)	C (28.9)	D (43.6)
U.S. Highway 24 / E Woodmen Road (Signalized)	B (19.0)	C (33.7)

Key: Signalized Intersection: Level of Service (Control Delay in sec/v eh)

please also include Hwy 24/Old Meridian intersection.

As discussed on Page 7 this intersection operates as a free-flow movement and is not expected to experience any delay. Nonetheless, this intersection has been added to all Intersection Capacity tables.

Background Traffic Analysis Results – Year 2045

By Year 2045 and without the proposed development, the signalized intersection of U.S. Highway 24 and Meridian Road is projected to maintain overall operations at LOS C during the morning peak traffic hour and LOS D during the afternoon peak traffic hour.

The signalized intersection of U.S. Highway 24 and E Woodmen Road is expected to maintain overall operations at LOS B during the morning peak traffic hour and LOS C during the afternoon peak traffic hour.

These intersection operations are similar to existing conditions.

IV. Proposed Project Traffic

Trip Generation

Standard traffic generation characteristics compiled by the Institute of Transportation Engineers (ITE) in their report entitled Trip Generation Manual, 12th Edition, were applied to the proposed land use in order to estimate average daily traffic (ADT), AM Peak Hour, and PM Peak Hour vehicle trips. A vehicle trip is defined as a one-way vehicle movement from a point of origin to a point of destination.

The ITE land use code 220 (Multifamily Housing (Low-Rise)) was used for estimating trip generation because of its conservative rates and best fit to the proposed land use description.

Due to the conceptual nature of the proposed development, no specific residential land uses and densities have been determined. As such, a maximum density of 30 units per acre, provided by Section 5.4.2 of the El Paso County Land Development Code⁵, was applied.

As actual land uses, densities, or site plans within the 12057 Highway 24 Multifamily Rezone become defined over time, it is expected that traffic generation characteristics considered within this study will need to be updated by more specific traffic analyses or studies to help assess if transportation improvements are needed to mitigate potential traffic impacts.

Trip generation rates used in this study are presented in Table 4.

Table 4 – Trip Generation Rates

ITE CODE LAND USE UNIT			TRIP GENERATION RATES						
			24 HOUR	AM PEAK HOUR			PM PEAK HOUR		
				ENTER	EXIT	TOTAL	ENTER	EXIT	TOTAL
220	Multifamily Housing (Low-Rise)	DU	6.21	0.10	0.31	0.41	0.32	0.20	0.52

Key: DU = Dwelling Units.

Note: All data and calculations above are subject to being rounded to nearest value.

Table 5 illustrates projected ADT, AM Peak Hour, and PM Peak Hour traffic volumes likely generated by the proposed development upon build-out.

⁵ Land Development Code of El Paso County, Colorado, El Paso County Development, December 2021.

Table 5 – Trip Generation Summary

ITE CODE	LAND USE	SIZE	TOTAL TRIPS GENERATED						
			24 HOUR	AM PEAK HOUR			PM PEAK HOUR		
				ENTER	EXIT	TOTAL	ENTER	EXIT	TOTAL
220	Multifamily Housing (Low-Rise)	349 DU	2,167	34	109	143	113	69	181
<i>Total:</i>			2,167	34	109	143	113	69	181

Key: DU = Dwelling Units.

Note: All data and calculations above are subject to being rounded to nearest value.

Upon build-out, Table 5 illustrates that the proposed development has the potential to generate approximately 2,167 daily vehicle trips with 143 of those occurring during the morning peak hour and 181 during the afternoon peak hour.

Adjustments to Trip Generation Rates

A development of this type is not likely to attract trips from within area land uses nor pass-by or diverted link trips from the adjacent roadway system, therefore no trip reduction was taken in this analysis.

Trip Distribution

The overall directional distribution of site-generated traffic was determined based on the location of development site within the County, proposed and existing area land uses, allowed turning movements, and available roadway network, and in reference to historical traffic count data provided by CDOT's Traffic Count Database System (TCDS)⁶.

Overall trip distribution patterns for the development are shown on Figure 5.

Trip Assignment

Trip assignment is how generated and distributed vehicle trips are expected to be loaded onto the available roadway network.

Applying trip distribution patterns to site-generated traffic provides the overall site-generated trip assignments shown on Figure 5.

⁶ [Transportation Data Management System](#), MS2, 2026.



Not to Scale

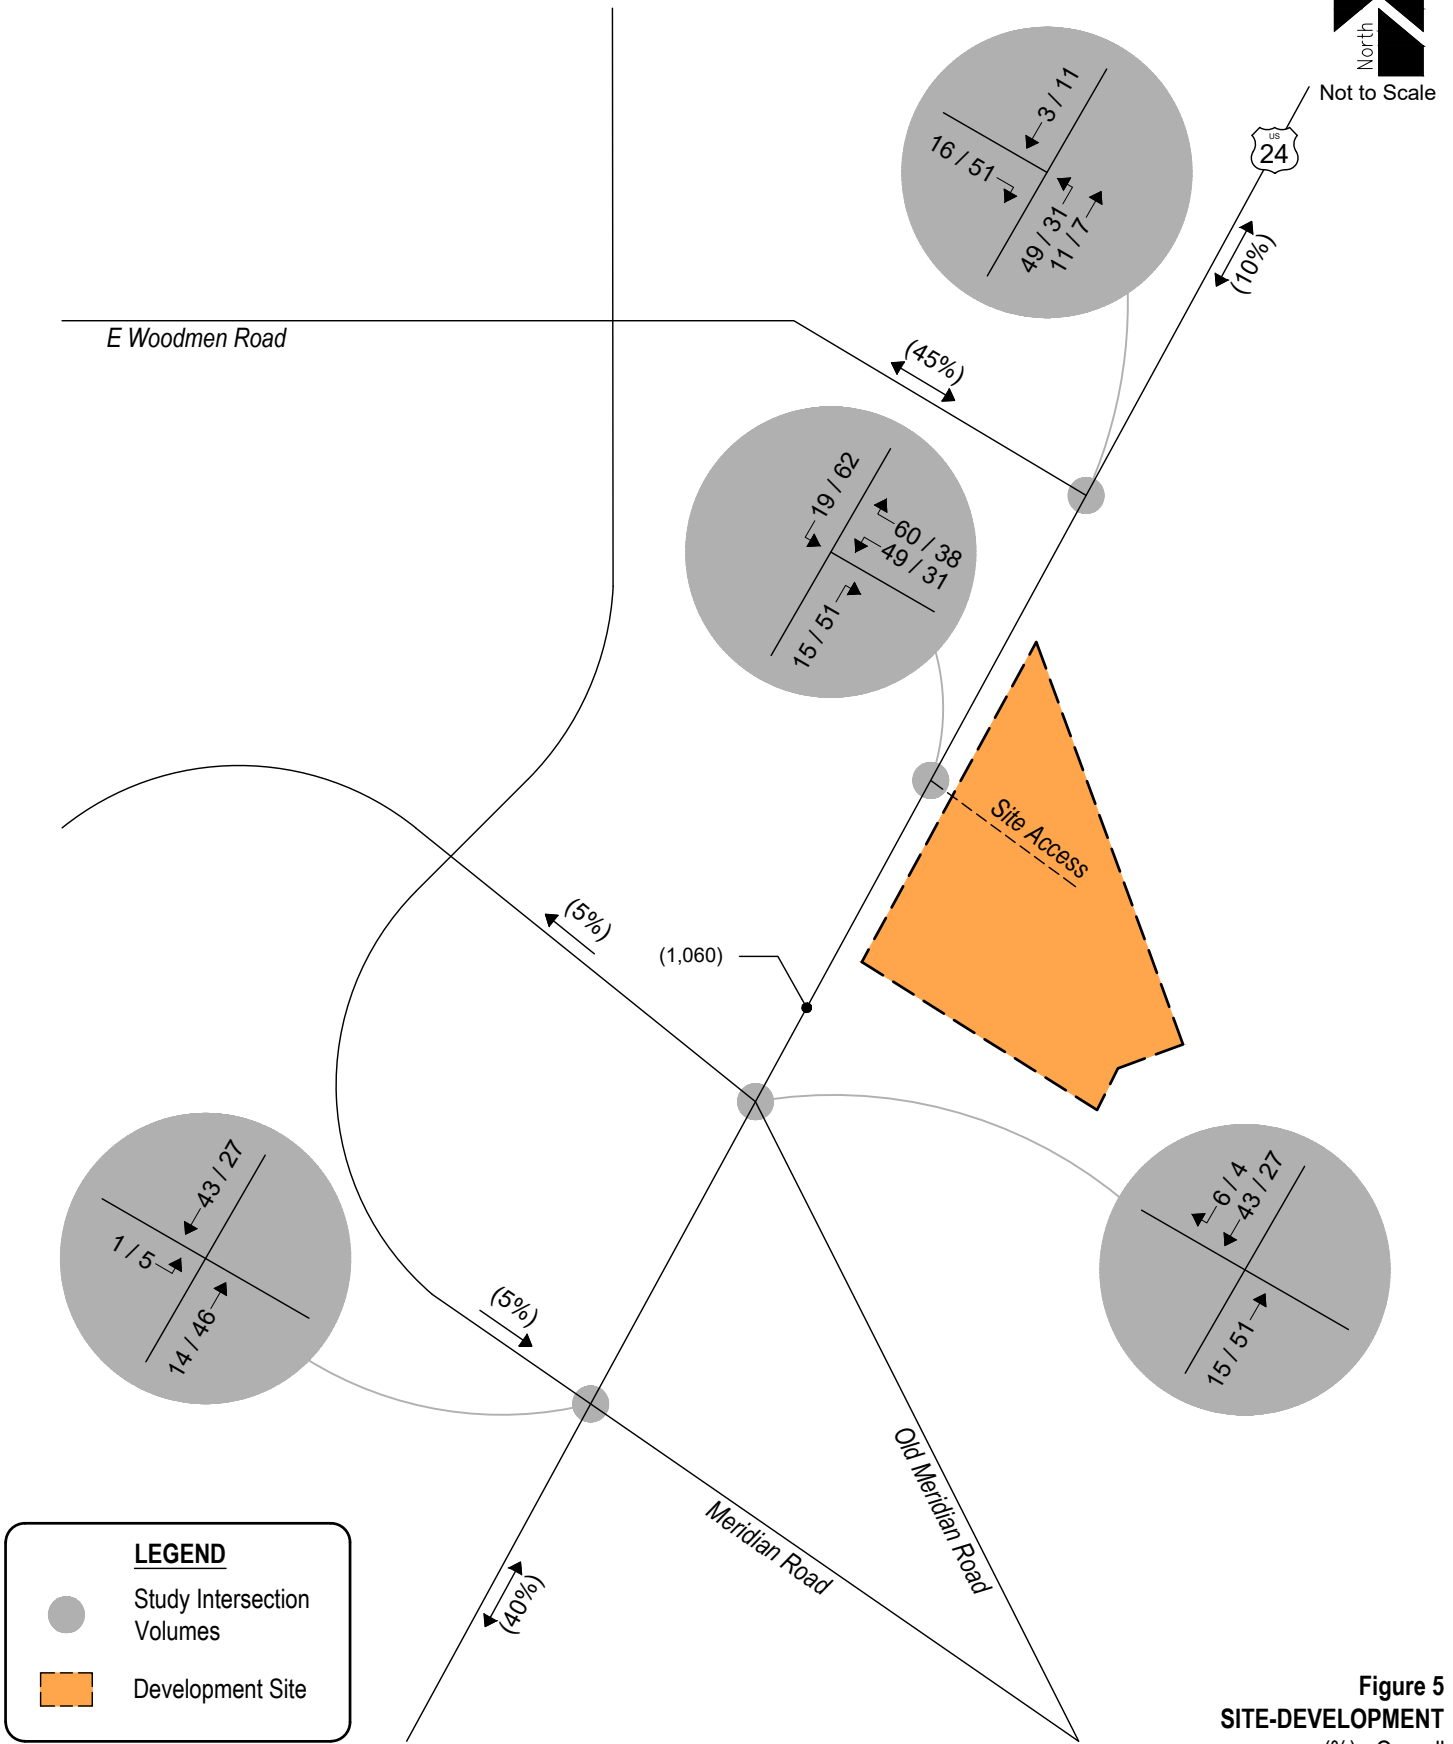


Figure 5
SITE-DEVELOPMENT
 (%): Overall
SITE-GENERATED TRIPS
 AM / PM Peak Hour
 (ADT): Average Daily Traffic



V. Future Traffic Conditions With Proposed Development

Total traffic is the traffic projected to be on area roadways with consideration of the proposed development. Total traffic includes background traffic projections for Years 2028 and 2045 with consideration of site-generated traffic. For analysis purposes, it was assumed that development construction would be completed by end of Year 2028.

Pursuant to area roadway improvement discussions provided in Section III, Year 2028 and Year 2045 total traffic conditions assume no additional roadway improvements to accommodate regional transportation demands. Roadway improvements associated with site development are expected to be limited to site access and frontage as required by the governing agency.

Total Traffic Auxiliary Lane Analysis

identify if acceleration lanes are required.

Auxiliary lanes for site development access drives were evaluated on CDOT's State Highway Access Code (SHAC)⁷.

Discussion updated.

Considering development build-out, an evaluation of auxiliary lane requirements, pursuant to Section 3.7(4) of CDOT's SHAC, reveals that a left turn deceleration lane at Site Access along U.S. Highway 24 may be required since the development's projected peak hour left turn ingress volume exceeds CDOT's threshold of 10 vehicles per hour (vph). Additionally, a right turn deceleration lane at Site Access along U.S. Highway 24 may be required since the development's projected peak hour right turn ingress volume exceeds CDOT's threshold of 10 vph.

It is noted that these deceleration lanes were assumed and modeled within the total traffic scenarios provided in this study. However, considering the conceptual nature of this development, no turn lanes are being recommended at this time. Instead, as actual land uses, densities, or site plans within the 12057 Highway 24 Multifamily Rezone become defined over time, it is expected that traffic generation characteristics considered within this study will need to be updated by more specific traffic analyses or studies to help assess if transportation improvements are needed to mitigate potential traffic impacts.

Projected Year 2028 total traffic volumes and intersection geometry are shown in Figure 6.

Figure 7 shows projected total traffic volumes and intersection geometry for Year 2045.

The analysis shows that they are needed. This TIS is setting the stage for the future traffic studies and recommended improvements are needed. The conceptual nature is understood and the TIS will need to be updated with more specifics as the the development progresses.

⁷ State Highway Access Code, The Transportation Co

Comment acknowledged.



Not to Scale

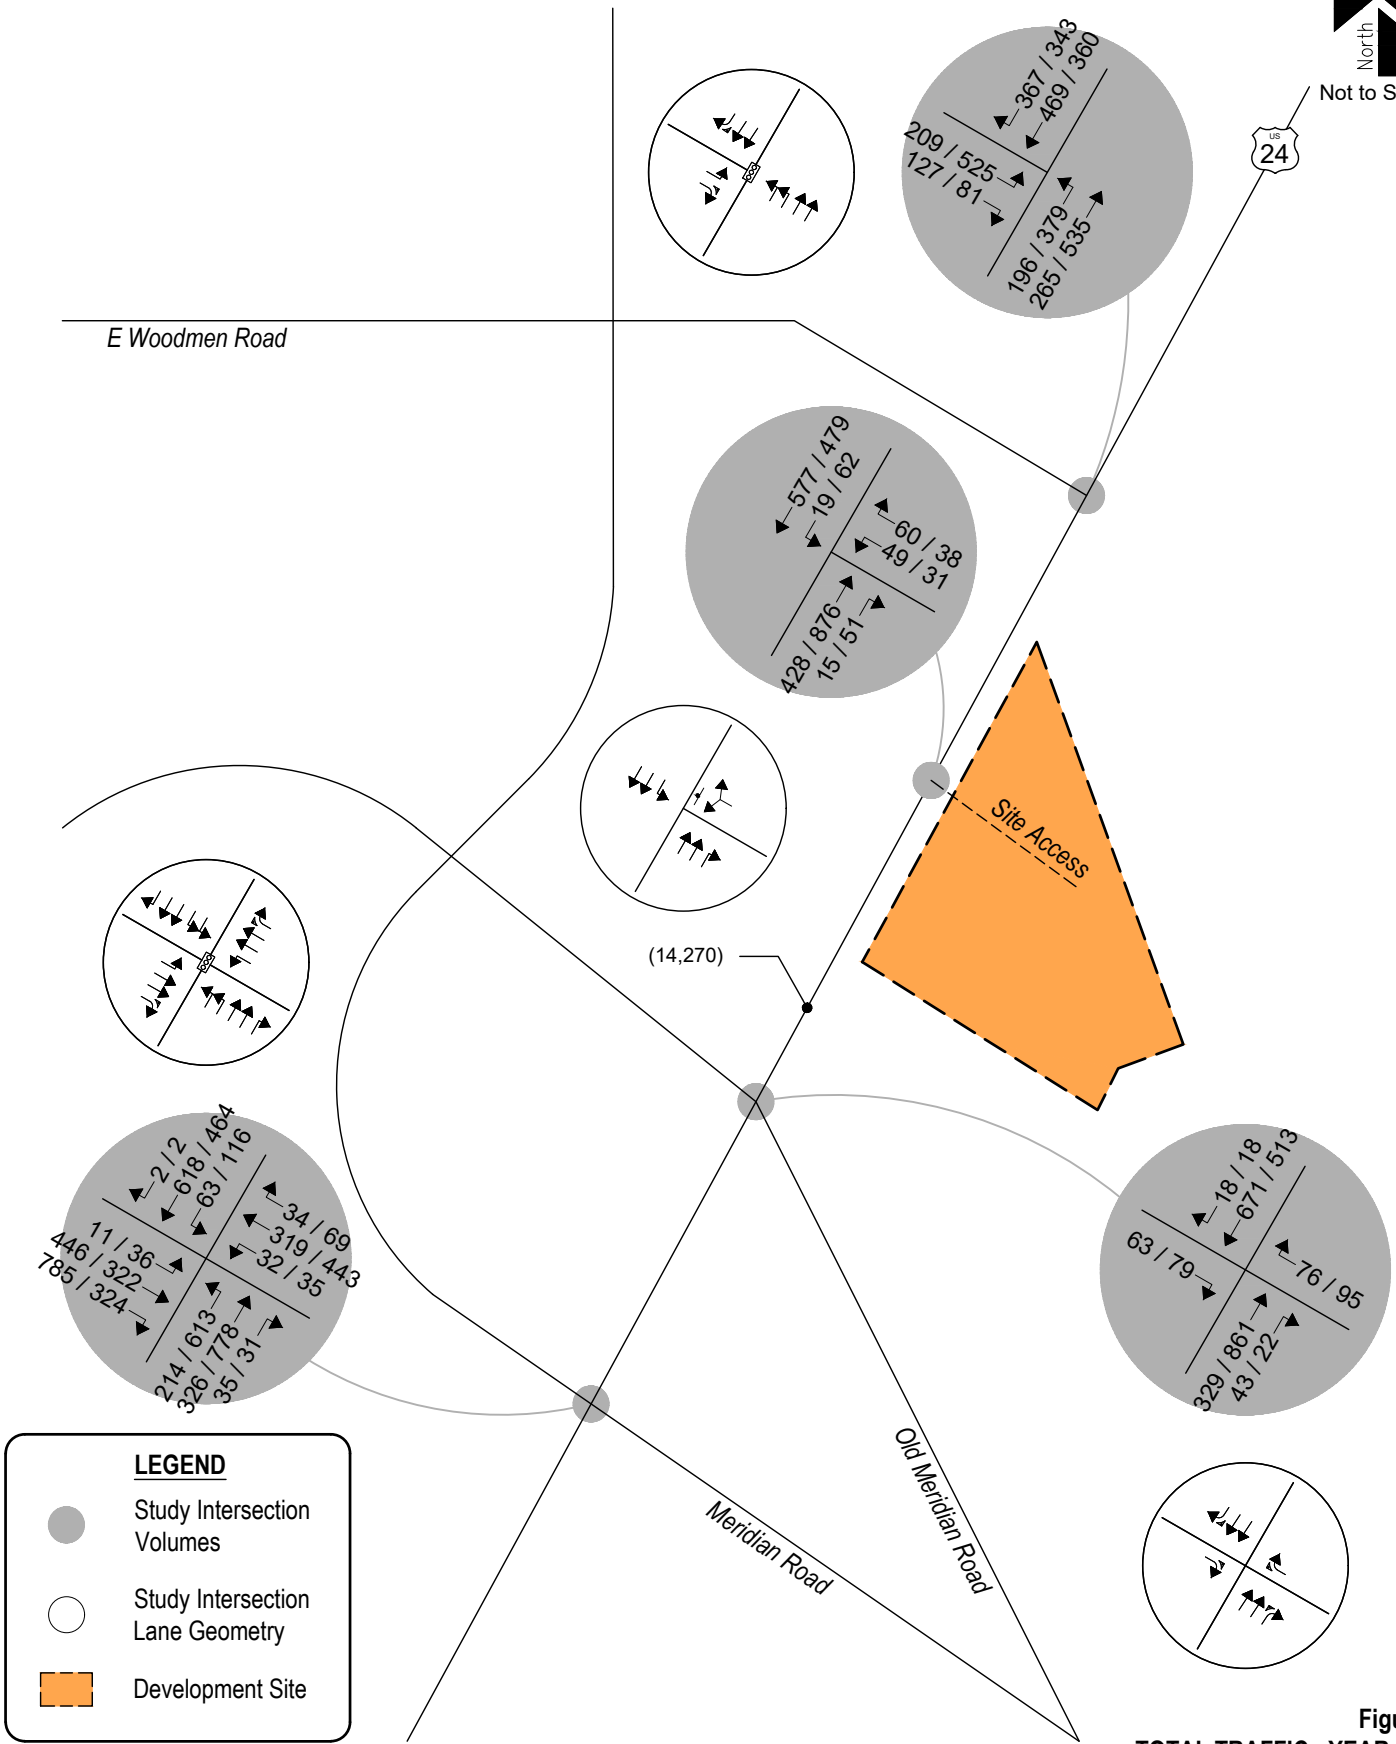


Figure 6
TOTAL TRAFFIC - YEAR 2027
 Volumes & Intersection Geometry
 AM / PM Peak Traffic Hour
 (ADT) : Average Daily Traffic





Not to Scale

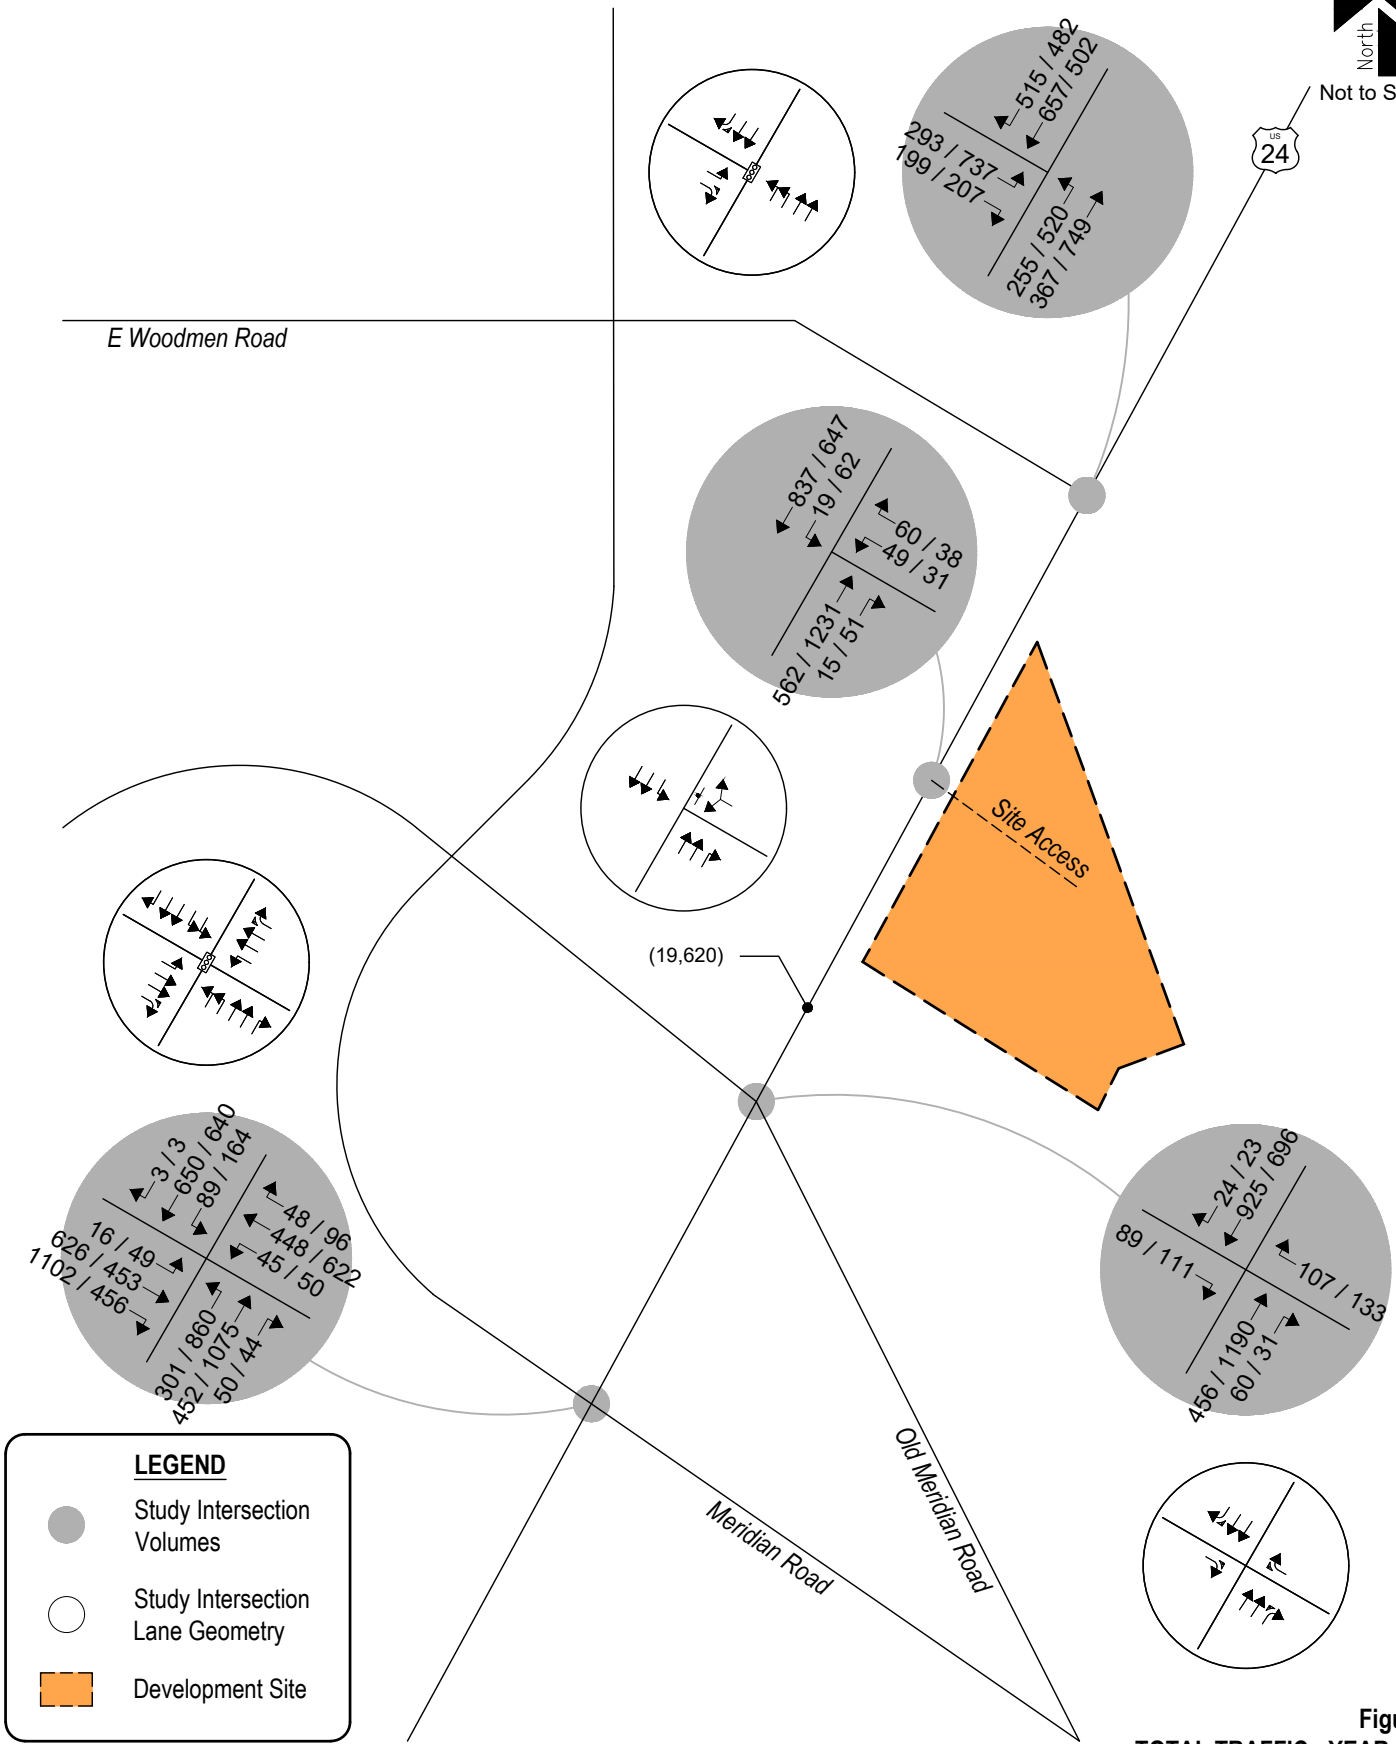


Figure 7
TOTAL TRAFFIC - YEAR 2045
 Volumes & Intersection Geometry
 AM / PM Peak Traffic Hour
 (ADT) : Average Daily Traffic



Peak Hour Intersection Levels of Service – Total Traffic

As with background traffic, the operations of the study intersections were analyzed under projected total traffic conditions using the SYNCHRO computer program. The analyses and procedures were performed in accordance with the latest HCM and are based upon the worst-case conditions that occur during a typical weekday upon build-out of site development and analyzed land uses. Therefore, study intersections are likely to operate with traffic conditions better than those described within this study, which represent the peak hours of weekday operations only.

Total traffic level of service analysis results for Years 2028 and 2045 are summarized in Table 6 and Table 7, respectively.

Definitions of levels of service are given in Appendix B. Intersection capacity worksheets are provided in Appendix C.

Table 6 – Intersection Capacity Analysis Summary – Total Traffic – Year 2028

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
U.S. Highway 24 / Meridian Road (Signalized)	C (27.1)	D (35.7)
U.S. Highway 24 / E Woodmen Road (Signalized)	B (19.8)	C (29.8)
U.S. Highway 24 / Site Access (Stop-Controlled)		
Westbound Left and Right	B	D
Southbound Left	A	B

Key: Signalized Intersection: Level of Service (Control Delay in sec/v/veh)
 Stop-Controlled Intersection: Level of Service

Table 7 – Intersection Capacity Analysis Summary – Total Traffic – Year 2045

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
U.S. Highway 24 / Meridian Road (Signalized)	C (29.0)	D (43.9)
U.S. Highway 24 / E Woodmen Road (Signalized)	B (19.9)	D (35.6)
U.S. Highway 24 / Site Access (Stop-Controlled)		
Westbound Left and Right	C	F
Southbound Left	A	B

Key: Signalized Intersection: Level of Service (Control Delay in sec/v/veh)
 Stop-Controlled Intersection: Level of Service

This movement is a free-flow movement and does not experience any delay. Nonetheless, movement added.

include the north eastbound right turn from Hwy 24 into the development.

include the Hwy 24/old meridian road intersection in your analysis.

As discussed on Page 7 this intersection operates as a free-flow movement and is not expected to experience any delay. Nonetheless, this intersection has been added to all Intersection Capacity tables.

Total Traffic Analysis Results Upon Development Build-Out

please update based on the added background of the area developments.

Table 7 illustrates how, by Year 2045 and upon development build-out, the signalized intersection of U.S. Highway 24 and Meridian Road continues to project overall LOS B during the morning peak traffic hour and LOS D operation during the afternoon peak traffic hour. Compared to the background traffic analysis, the traffic generated by the proposed development is not expected to significantly change the operations of the study intersection.

Report updated as necessary.

The signalized intersection of U.S. Highway 24 and E Woodmen Road is projected to have morning peak traffic hour operations at LOS B and LOS D during the afternoon peak traffic hour.

The stop-controlled intersection of U.S. Highway 24 and Site Access is projected to have turning movement operations at LOS C or better during the morning peak traffic hour and LOS B for the afternoon peak traffic hour. Exceptions include the westbound turning movement which is projected to provide LOS operations at LOS F during the afternoon peak traffic hour. Considering the conceptual nature of this development and that the LOS F operation is expected to occur internal to the development, no mitigations are currently recommended.

It is to be noted that it is not uncommon for unsignalized movements to or from an arterial roadway, in urban areas, to operate with noticeable delays during peak traffic hours. It is, however, likely that turn movements will operate better than the results obtained with this HCM Two-Way Stop-Control (TWSC) level of service analysis would indicate, as the HCM analysis may not accurately account for the effect of vehicle platooning and gaps caused by upstream signals. The upstream signal controls along U.S. Highway 24 will tend to create additional gaps in the traffic stream for turning movements at Site Access and will most likely provide mitigation to the LOS F operation projected during the afternoon peak traffic hour.

These intersection op

Appendix B.8. If an intersection does not meet LOS D or better, discuss what steps can be taken to bring the intersection to a satisfactory level. Please provide the steps that can be taken to bring the intersection to a satisfactory level.

Mitigation provided, however considering the conceptual nature of the development as noted, no mitigations are recommended at this time.

VI. Project Impacts

It is emphasized that the analyses and procedures described in this study were performed in accordance with the latest HCM and are based upon the worst-case conditions that occur during a typical weekday upon build-out of site development and analyzed land uses. Therefore, study intersections are likely to operate with traffic conditions better than those described within this study, which represent the peak hours of weekday operations only.

Queue Length Analysis

Queue lengths for the study intersections were analyzed using Year 2045 background and total traffic conditions. The analysis yields estimate of 95th percentile queue lengths, which have only a five percent probability of being exceeded during the analysis time period. An average vehicle length of 25 feet was assumed. Queue lengths were modeled and are included with the Synchro worksheets in Appendix C.

In general, auxiliary lane lengths are recommended to accommodate CDOT's minimum turn lane lengths or accommodate long-term 95th percentile vehicle queues, whichever is greater.

Table 8 summarizes the 95th percentile queue results in comparison to the projected storage requirements for turn movements within study area for Year 2045.

Table 8 – Turn Lane Queues and Storage Requirements – Year 2045

Intersection	Turn Movement	Existing Turn Lane Length (feet)	Background 2045		Total 2045		Recommended Turn Lane Length (feet)	
			AM Peak Hour (feet)	PM Peak Hour (feet)	AM Peak Hour (feet)	PM Peak Hour (feet)		
Signalized Intersections								
U.S. Highway 24 / Meridian Road	EB	L	210'	26'	64'	28'	69'	210'
		T	-	371'	275'	371'	275'	-
		R	610'	0'	0'	0'	0'	610'
	WB	L	825'	60'	70'	60'	70'	825'
		T	-	258'	390'	258'	390'	-
		R	715'	0'	0'	0'	0'	715'
	NB	L	230'	202'	503'	202'	503'	255' x2
		T	-	179'	499'	185'	531'	-
		R	270'	0'	1'	0'	1'	270'
	SB	L	295'	65'	203'	52'	194'	295'
		T	-	437'	401'	466'	416'	-
		R	190'	0'	0'	0'	0'	190'
U.S. Highway 24 / E Woodmen Road	EB	L	195'	193'	405'	193'	405'	205' x2
		R	-	0'	0'	0'	0'	-
	NB	L	850' x2	145'	325'	173'	341'	850' x2
		T	-	144'	282'	141'	151'	-
	SB	T	-	214'	270'	225'	284'	-
R	390'	0'	0'	0'	0'	390'		
Stop-Controlled Intersections								
U.S. Highway 24 / Old Meridian Road	EB	R	-	0'	0'	0'	0'	-
		WB	R	-	0'	0'	0'	0'
	NB	T	-	0'	0'	0'	0'	-
		R	-	0'	0'	0'	0'	-
	SB	T	-	0'	0'	0'	0'	-
		R	-	0'	0'	0'	0'	-
U.S. Highway 24 / Site Access	WB	L,R	-	-	-	40'	88'	-
		T	-	-	-	0'	0'	-
	NB	R	-	-	-	0'	0	600'
		L	-	-	-	3'	13'	600'
SB	T	-	-	-	0'	0'	-	

Note: Turn Lane Length does not include taper length.
 x2 = Dual Turn Lanes.

Development Impacts

Analysis of future traffic conditions indicates that the addition of site-generated traffic is expected to create minimal negative impact to traffic operations for the existing and surrounding roadway system upon roadway and intersection control improvements assumed within this analysis. With all conservative assumptions defined in this analysis, the study intersections are projected to operate at future levels of service comparable to Year 2045 background traffic conditions.

The extended delay projected for the westbound turning movement at the intersection of U.S. Highway 24 and Site access is not expected to negatively affect traffic operations for the surrounding roadway network as extended delay is expected to occur internal to the development. Additionally, considering the conceptual nature of this development, no improvements are recommended at this time.

Recommended Improvements

Roadway and intersection improvement recommendations were assessed pursuant to roadway descriptions discussed in Section I, projected peak hour traffic volumes, level of service results, projected 95th percentile queue lengths, and per requirements defined within the County's ECM and CDOT's SHAC.

Considering the conceptual nature of the development areas proposed, no improvements to the public roadway network are recommended at this time. As actual land uses, densities, or site plans within 12057 Highway 24 Multifamily Rezone become defined over time, it is expected that more specific traffic analyses or studies will be needed to help assess if transportation improvement are needed to mitigate potential traffic impacts.

VII. Conclusion

This traffic impact study addressed the capacity, geometric, and control requirements associated with the development entitled 12057 Highway 24 Multifamily Rezone. This proposed residential development consists of 349 multifamily dwelling units and is located to the northeast of U.S. Highway 24 and Meridian Road in El Paso County, Colorado.

The study area examined in this analysis encompassed the U.S. Highway 24 intersections with Meridian Road, Old Meridian Road, and E Woodmen Road and included the proposed site access.

Analysis was conducted for critical AM Peak Hour and PM Peak Hour traffic operations for existing traffic conditions, Year 2028 and Year 2045 background traffic conditions, and Year 2028 and Year 2045 total traffic conditions.

Analysis of existing traffic conditions indicates that all signalized intersections operate under LOS C or better during the morning peak traffic hour and LOS D or better during the afternoon peak traffic hour.

Under Year 2028 and 2045 background traffic conditions, operational analysis shows that all signalized intersections are projected to operate with LOS C or better during the morning peak traffic hour and LOS D or better during the afternoon peak traffic hour.


Analysis of future traffic conditions indicates that the addition of site-generated traffic is expected to create minimal negative impact to traffic operations for the existing and surrounding roadway system upon roadway and intersection control improvements assumed within this analysis. With all conservative assumptions defined in this analysis, the study intersections is projected to operate at future levels of service comparable to Year 2045 background traffic conditions. Proposed site accesses have long-term operations at LOS C or better during peak traffic periods and upon build-out. Exceptions include the westbound turning movement which operates at LOS F during the afternoon peak traffic hour.

The submitting of new CDOT access permits are anticipated with the development of this site and will be coordinated through CDOT staff.


APPENDIX A

Traffic Count Data Signal Timing Information


Peak Hour - Motorized Vehicles

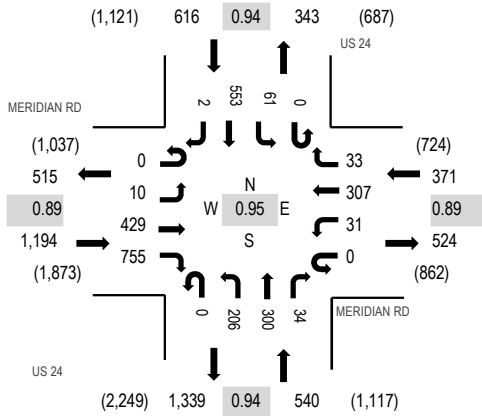

Peak Hour - Bicycles

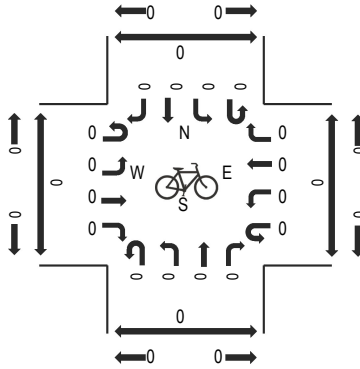

Peak Hour - Pedestrians




Note: Total study counts contained in parentheses.


Traffic Counts - Motorized Vehicles

Interval Start Time	MERIDIAN RD Eastbound				MERIDIAN RD Westbound				US 24 Northbound			US 24 Southbound				Total	Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru			Right	West	East	South	North
7:00 AM	0	2	87	163	0	9	73	6	0	44	64	9	0	12	151	1	621	2,721	0	0	0	0
7:15 AM	0	6	116	209	0	6	58	6	0	49	67	6	0	20	142	0	685	2,647	0	0	0	0
7:30 AM	0	1	126	210	0	5	83	11	0	51	76	8	0	14	131	0	716	2,555	0	0	0	0
7:45 AM	0	1	100	173	0	11	93	10	0	62	93	11	0	15	129	1	699	2,400	0	0	0	0
8:00 AM	0	4	58	120	0	7	61	13	0	60	79	14	0	18	112	1	547	2,114	0	0	0	0
8:15 AM	0	1	84	125	0	13	86	11	0	77	58	10	0	12	116	0	593		0	0	0	0
8:30 AM	0	1	38	125	0	6	68	11	0	64	84	14	0	28	120	2	561		0	0	0	0
8:45 AM	0	2	48	73	0	11	56	10	0	45	70	2	0	12	82	2	413		0	0	0	0
Count Total	0	18	657	1,198	0	68	578	78	0	452	591	74	0	131	983	7	4,835		0	0	0	0
Peak Hour	0	10	429	755	0	31	307	33	0	206	300	34	0	61	553	2	2,721		0	0	0	0


Peak Hour - Motorized Vehicles

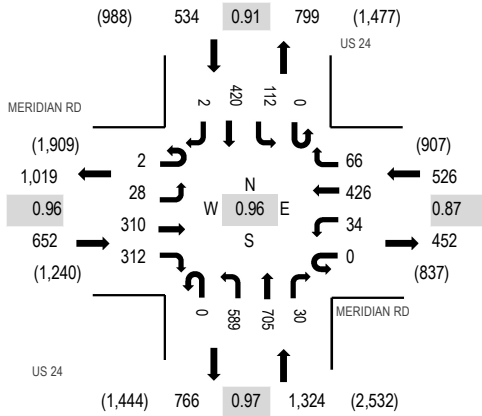

Peak Hour - Bicycles

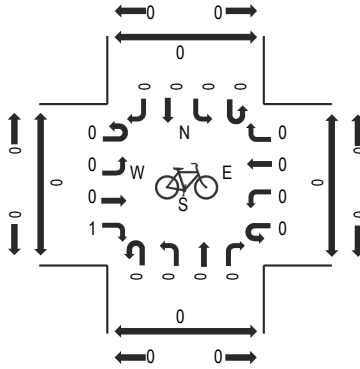

Peak Hour - Pedestrians




Note: Total study counts contained in parentheses.


Traffic Counts - Motorized Vehicles

Interval Start Time	MERIDIAN RD Eastbound				MERIDIAN RD Westbound				US 24 Northbound			US 24 Southbound			Total	Rolling Hour	Pedestrian Crossings					
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left			Thru	Right	West	East	South	North
4:00 PM	0	5	59	64	0	6	124	13	0	141	155	6	0	30	94	3	700	3,015	0	0	0	0
4:15 PM	0	6	79	82	0	12	95	17	0	144	182	10	0	35	112	0	774	3,036	0	0	0	0
4:30 PM	0	2	87	77	0	12	131	19	0	141	174	5	0	27	119	0	794	2,949	0	0	0	0
4:45 PM	0	9	73	80	0	6	114	17	0	157	178	6	0	21	86	0	747	2,800	0	0	0	0
5:00 PM	2	11	71	73	0	4	86	13	0	147	171	9	0	29	103	2	721	2,652	0	0	0	0
5:15 PM	0	6	76	88	0	7	81	15	0	150	153	7	0	17	86	1	687		0	0	0	0
5:30 PM	0	8	71	81	0	6	47	4	0	149	152	7	0	25	95	0	645		0	0	0	0
5:45 PM	0	4	68	58	0	7	59	12	0	134	151	3	0	16	86	1	599		0	0	0	0
Count Total	2	51	584	603	0	60	737	110	0	1,163	1,316	53	0	200	781	7	5,667		0	0	0	0
Peak Hour	2	28	310	312	0	34	426	66	0	589	705	30	0	112	420	2	3,036		0	0	0	0


Peak Hour - Motorized Vehicles

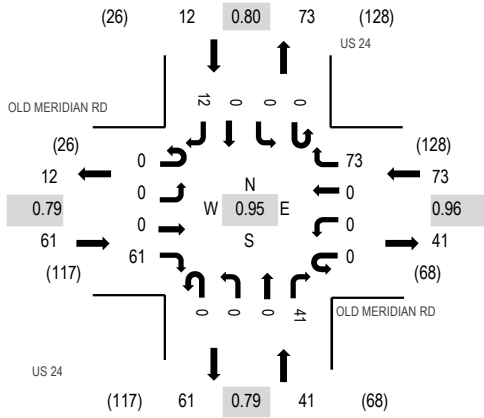

Peak Hour - Bicycles

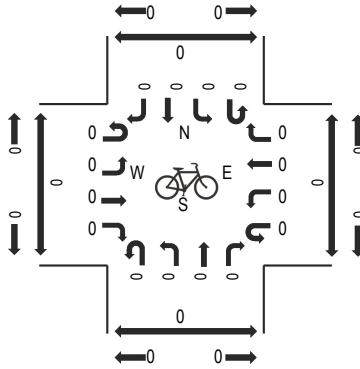

Peak Hour - Pedestrians




Note: Total study counts contained in parentheses.


Traffic Counts - Motorized Vehicles

Interval Start Time	OLD MERIDIAN RD Eastbound				OLD MERIDIAN RD Westbound				US 24 Northbound			US 24 Southbound				Total	Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru			Right	West	East	South	North
7:00 AM	0	0	0	18	0	0	0	19	0	0	0	9	0	0	0	1	47	187	0	0	0	0
7:15 AM	0	0	0	13	0	0	0	17	0	0	0	10	0	0	0	4	44	184	0	0	0	0
7:30 AM	0	0	0	19	0	0	0	19	0	0	0	9	0	0	0	2	49	175	0	0	0	0
7:45 AM	0	0	0	11	0	0	0	18	0	0	0	13	0	0	0	5	47	161	0	0	0	0
8:00 AM	0	0	0	20	0	0	0	11	0	0	0	8	0	0	0	5	44	152	0	0	0	1
8:15 AM	0	0	0	12	0	0	0	15	0	0	0	6	0	0	0	2	35		0	0	0	0
8:30 AM	0	0	0	15	0	0	0	11	0	0	0	6	0	0	0	3	35		0	0	0	0
8:45 AM	0	0	0	9	0	0	0	18	0	0	0	7	0	0	0	4	38		0	0	0	0
Count Total	0	0	0	117	0	0	0	128	0	0	0	68	0	0	0	26	339		0	0	0	1
Peak Hour	0	0	0	61	0	0	0	73	0	0	0	41	0	0	0	12	187		0	0	0	0


Peak Hour - Motorized Vehicles

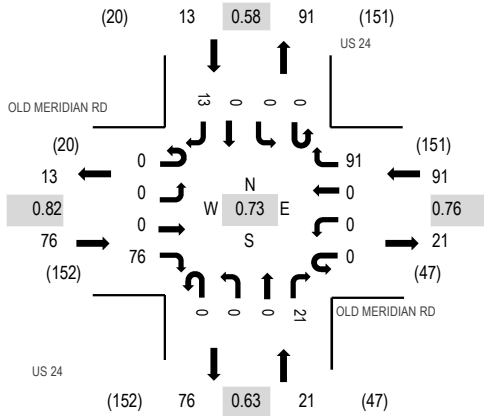

Peak Hour - Bicycles

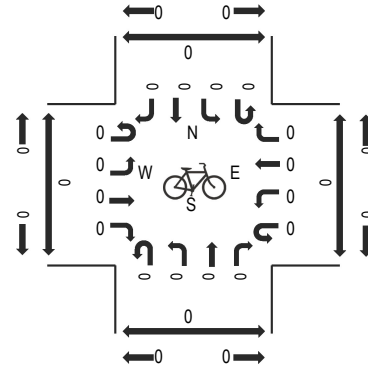

Peak Hour - Pedestrians

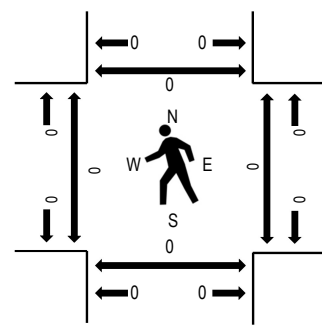

Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	OLD MERIDIAN RD Eastbound				OLD MERIDIAN RD Westbound				US 24 Northbound				US 24 Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
4:00 PM	0	0	0	16	0	0	0	24	0	0	0	5	0	0	0	4	49	181	0	0	0	0
4:15 PM	0	0	0	28	0	0	0	20	0	0	0	5	0	0	0	6	59	201	0	0	0	0
4:30 PM	0	0	0	15	0	0	0	20	0	0	0	1	0	0	0	2	38	181	0	0	0	0
4:45 PM	0	0	0	11	0	0	0	21	0	0	0	1	0	0	0	2	35	186	0	0	0	0
5:00 PM	0	0	0	22	0	0	0	30	0	0	0	14	0	0	0	3	69	189	0	0	0	0
5:15 PM	0	0	0	18	0	0	0	13	0	0	0	6	0	0	0	2	39		0	0	0	0
5:30 PM	0	0	0	25	0	0	0	11	0	0	0	7	0	0	0	0	43		0	0	0	0
5:45 PM	0	0	0	17	0	0	0	12	0	0	0	8	0	0	0	1	38		0	0	0	0
Count Total	0	0	0	152	0	0	0	151	0	0	0	47	0	0	0	20	370		0	0	0	0
Peak Hour	0	0	0	76	0	0	0	91	0	0	0	21	0	0	0	13	201		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 3 US 24 & E WOODMEN RD AM

Date: Tuesday, December 16, 2025


Peak Hour: 07:00 AM - 08:00 AM

Peak 15-Minutes: 07:45 AM - 08:00 AM


Peak Hour - Motorized Vehicles

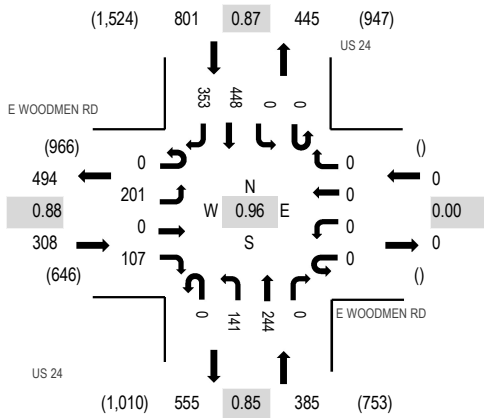

Peak Hour - Bicycles

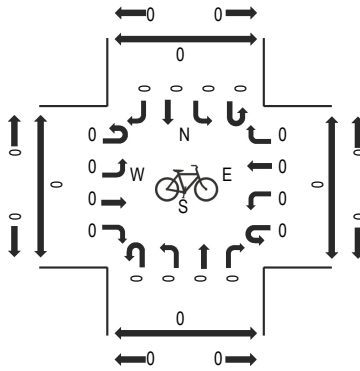

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	E WOODMEN RD Eastbound				E WOODMEN RD Westbound				US 24 Northbound			US 24 Southbound				Total	Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru			Right	West	East	South	North
7:00 AM	0	41	0	31	0	0	0	0	0	25	61	0	0	0	144	85	387	1,494	0	0	0	0
7:15 AM	0	56	0	25	0	0	0	0	0	35	56	0	0	0	104	81	357	1,486	0	0	0	0
7:30 AM	0	52	0	18	0	0	0	0	0	42	50	0	0	0	101	99	362	1,484	0	0	0	0
7:45 AM	0	52	0	33	0	0	0	0	0	39	77	0	0	0	99	88	388	1,479	0	0	0	0
8:00 AM	0	69	0	18	0	0	0	0	0	27	70	0	0	0	94	101	379	1,429	0	0	0	0
8:15 AM	0	60	0	23	0	0	0	0	0	26	54	0	0	0	103	89	355		0	0	0	0
8:30 AM	0	69	0	32	0	0	0	0	0	29	61	0	0	0	91	75	357		0	0	0	0
8:45 AM	0	50	0	17	0	0	0	0	0	32	69	0	0	0	77	93	338		0	0	0	0
Count Total	0	449	0	197	0	0	0	0	0	255	498	0	0	0	813	711	2,923		0	0	0	0
Peak Hour	0	201	0	107	0	0	0	0	0	141	244	0	0	0	448	353	1,494		0	0	0	0


Location: 3 US 24 & E WOODMEN RD PM

Date: Tuesday, December 16, 2025


Peak Hour: 04:15 PM - 05:15 PM

Peak 15-Minutes: 04:15 PM - 04:30 PM


Peak Hour - Motorized Vehicles

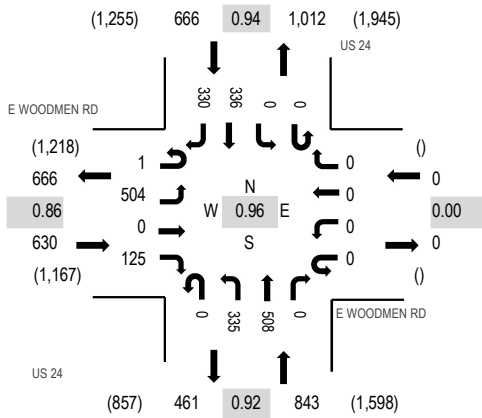

Peak Hour - Bicycles

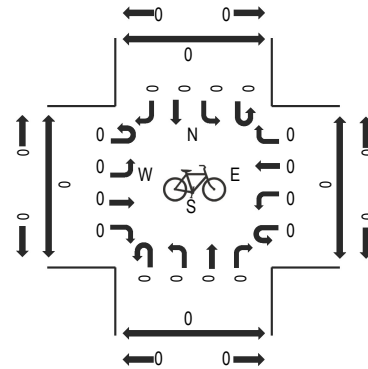

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	E WOODMEN RD Eastbound				E WOODMEN RD Westbound				US 24 Northbound			US 24 Southbound				Total	Rolling Hour	Pedestrian Crossings				
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru			Right	West	East	South	North
4:00 PM	0	111	0	38	0	0	0	0	0	88	134	0	0	0	78	71	520	2,110	0	0	0	0
4:15 PM	0	150	0	34	0	0	0	0	0	75	119	0	0	0	100	77	555	2,139	0	0	0	0
4:30 PM	0	97	0	39	0	0	0	0	0	105	123	0	0	0	77	78	519	2,052	0	0	0	0
4:45 PM	0	125	0	22	0	0	0	0	0	69	128	0	0	0	93	79	516	1,996	0	0	0	0
5:00 PM	1	132	0	30	0	0	0	0	0	86	138	0	0	0	66	96	549	1,910	0	0	0	0
5:15 PM	1	102	0	21	0	0	0	0	0	70	122	0	0	0	80	72	468		0	0	0	0
5:30 PM	0	149	0	15	0	0	0	0	0	43	112	0	0	0	67	77	463		0	0	0	0
5:45 PM	0	80	0	20	0	0	0	0	0	63	123	0	0	0	77	67	430		0	0	0	0
Count Total	2	946	0	219	0	0	0	0	0	599	999	0	0	0	638	617	4,020		0	0	0	0
Peak Hour	1	504	0	125	0	0	0	0	0	335	508	0	0	0	336	330	2,139		0	0	0	0



All Traffic Data Services

4 - US 24 NORTH OF OLD MERIDIAN RD

Time	NB	SB	Total
12/16/2025	6	4	10
12/16/2025 12:15:00 AM	8	5	13
12/16/2025 12:30:00 AM	11	7	18
12/16/2025 12:45:00 AM	4	3	7
12/16/2025 1:00:00 AM	5	2	7
12/16/2025 1:15:00 AM	4	1	5
12/16/2025 1:30:00 AM	4	1	5
12/16/2025 1:45:00 AM	4	5	9
12/16/2025 2:00:00 AM	1	4	5
12/16/2025 2:15:00 AM	4	3	7
12/16/2025 2:30:00 AM	4	2	6
12/16/2025 2:45:00 AM	5	3	8
12/16/2025 3:00:00 AM	2	2	4
12/16/2025 3:15:00 AM	5	6	11
12/16/2025 3:30:00 AM	5	16	21
12/16/2025 3:45:00 AM	9	6	15
12/16/2025 4:00:00 AM	7	13	20
12/16/2025 4:15:00 AM	7	14	21
12/16/2025 4:30:00 AM	18	26	44
12/16/2025 4:45:00 AM	13	27	40
12/16/2025 5:00:00 AM	11	39	50
12/16/2025 5:15:00 AM	15	57	72
12/16/2025 5:30:00 AM	24	94	118
12/16/2025 5:45:00 AM	31	88	119
12/16/2025 6:00:00 AM	37	130	167
12/16/2025 6:15:00 AM	74	151	225
12/16/2025 6:30:00 AM	111	150	261
12/16/2025 6:45:00 AM	87	177	264
12/16/2025 7:00:00 AM	86	156	242
12/16/2025 7:15:00 AM	87	146	233
12/16/2025 7:30:00 AM	101	122	223
12/16/2025 7:45:00 AM	116	129	245
12/16/2025 8:00:00 AM	90	117	207
12/16/2025 8:15:00 AM	81	126	207
12/16/2025 8:30:00 AM	99	135	234
12/16/2025 8:45:00 AM	93	90	183
12/16/2025 9:00:00 AM	95	102	197
12/16/2025 9:15:00 AM	70	79	149
12/16/2025 9:30:00 AM	73	89	162
12/16/2025 9:45:00 AM	100	72	172
12/16/2025 10:00:00 AM	77	76	153
12/16/2025 10:15:00 AM	70	91	161
12/16/2025 10:30:00 AM	87	86	173
12/16/2025 10:45:00 AM	78	72	150
12/16/2025 11:00:00 AM	72	80	152
12/16/2025 11:15:00 AM	72	76	148
12/16/2025 11:30:00 AM	88	84	172
12/16/2025 11:45:00 AM	102	72	174
Total	2,253	3,036	5,289
Percentage	42.6%	57.4%	
Peak Hour	7:15 AM	6:15 AM	6:30 AM
Volume	394	634	1,000
PHF	0.849	0.895	0.947



All Traffic Data Services

4 - US 24 NORTH OF OLD MERIDIAN RD

Time	NB	SB	Total
12/16/2025 12:00:00 PM	92	80	172
12/16/2025 12:15:00 PM	102	77	179
12/16/2025 12:30:00 PM	60	50	110
12/16/2025 12:45:00 PM	81	91	172
12/16/2025 1:00:00 PM	85	68	153
12/16/2025 1:15:00 PM	111	65	176
12/16/2025 1:30:00 PM	90	72	162
12/16/2025 1:45:00 PM	88	71	159
12/16/2025 2:00:00 PM	110	97	207
12/16/2025 2:15:00 PM	145	81	226
12/16/2025 2:30:00 PM	113	96	209
12/16/2025 2:45:00 PM	104	94	198
12/16/2025 3:00:00 PM	172	97	269
12/16/2025 3:15:00 PM	183	109	292
12/16/2025 3:30:00 PM	186	100	286
12/16/2025 3:45:00 PM	209	129	338
12/16/2025 4:00:00 PM	193	111	304
12/16/2025 4:15:00 PM	215	126	341
12/16/2025 4:30:00 PM	216	127	343
12/16/2025 4:45:00 PM	206	113	319
12/16/2025 5:00:00 PM	233	103	336
12/16/2025 5:15:00 PM	180	93	273
12/16/2025 5:30:00 PM	173	92	265
12/16/2025 5:45:00 PM	173	91	264
12/16/2025 6:00:00 PM	147	75	222
12/16/2025 6:15:00 PM	95	54	149
12/16/2025 6:30:00 PM	87	62	149
12/16/2025 6:45:00 PM	62	38	100
12/16/2025 7:00:00 PM	80	32	112
12/16/2025 7:15:00 PM	58	30	88
12/16/2025 7:30:00 PM	58	20	78
12/16/2025 7:45:00 PM	43	37	80
12/16/2025 8:00:00 PM	37	25	62
12/16/2025 8:15:00 PM	64	24	88
12/16/2025 8:30:00 PM	53	16	69
12/16/2025 8:45:00 PM	34	27	61
12/16/2025 9:00:00 PM	52	14	66
12/16/2025 9:15:00 PM	40	20	60
12/16/2025 9:30:00 PM	34	12	46
12/16/2025 9:45:00 PM	20	20	40
12/16/2025 10:00:00 PM	29	13	42
12/16/2025 10:15:00 PM	23	8	31
12/16/2025 10:30:00 PM	14	17	31
12/16/2025 10:45:00 PM	17	4	21
12/16/2025 11:00:00 PM	16	10	26
12/16/2025 11:15:00 PM	11	10	21
12/16/2025 11:30:00 PM	4	8	12
12/16/2025 11:45:00 PM	4	5	9
Total	4,602	2,814	7,416
Percentage	62.1%	37.9%	
Peak Hour	4:15 PM	3:45 PM	4:15 PM
Volume	870	493	1,339
PHF	0.933	0.955	0.976
Grand Total	6,855	5,850	12,705
Percentage	54.0%	46.0%	

Ped Service Limit	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pre Green	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Pre Clearance	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Phases	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Pre Clearance 2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Red Clear Ext Max	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Red Clear Ext Pass	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Jump	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Adv Warning Ext	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Phase Options

Phases	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Enable	X	X	X	X	X	X	X	X												
Auto Flash Ent.		X				X														
Auto Flash Exit		X				X														
Non Actuated I																				
Non Actuated II																				
Non Lock Mem	X	X	X	X	X	X	X	X												
Min Veh Recall																				
Max Veh Recall																				
Ped Recall																				
Soft Veh Recall																				
Dual Entry				X				X												
Sim Gap Dis																				
Guaranteed Pass																				
Act Rest Walk																				
Cond Service																				
Add Initial																				
Ped Clr During Yel																				
Ped Clr During Red																				
Cond Reservice																				
Yel Min Override																				
No Startup Call																				
Adv. Warn Flasher																				
No Ped Str Up Call																				
Ped Clr OVTG																				
Flash Exit Call																				
Flash Exit Ped Call																				
MinGreen2																				
MaxGreen2																				
MaxGreen3																				
Ped2																				
Ped Clear Pre Clear																				
Ped NA+ Mode																				
Red Rest																				
Serve Evy Oth Even																				
Serve Evy Oth Odd																				
Coord Ped Yield																				
Ped Recycle																				
Coutdown																				

No Serve Phases

Sequence 1		Sequence 2		Sequence 3		Sequence 4	
Ph.	No Serve Phases	Ph.	No Serve Phases	Ph.	No Serve Phases	Ph.	No Serve Phases
1		1		1		1	
2		2		2		2	

3		3		3		3	
4		4		4		4	
5		5		5		5	
6		6		6		6	
7		7		7		7	
8		8		8		8	

Sequence 1		Sequence 2		Sequence 3		Sequence 4	
9		9		9		9	
10		10		10		10	
11		11		11		11	
12		12		12		12	
13		13		13		13	
14		14		14		14	
15		15		15		15	
16		16		16		16	

Phase Configuration

Ph.	Startup	Ring	Concurrent	Startup Min	Description
1	Phase Not On	1	5,6	0	
2	Green No Walk	1	5,6	0	
3	Phase Not On	1	7,8	0	
4	Phase Not On	1	7,8	0	
5	Phase Not On	2	1,2	0	
6	Green No Walk	2	1,2	0	
7	Phase Not On	2	3,4	0	
8	Phase Not On	2	3,4	0	
9	None	0		0	
10	None	0		0	
11	None	0		0	
12	None	0		0	
13	None	0		0	
14	None	0		0	
15	None	0		0	
16	None	0		0	
17	None	0		0	
18	None	0		0	
19	None	0		0	
20	None	0		0	

Sequence Configuration

Sequence 1		Sequence 2		Sequence 3		Sequence 4	
Ring	Phases	Ring	Phases	Ring	Phases	Ring	Phases
1	1,2,a,3,4,b	1	2,1,a,3,4,b	1	1,2,a,4,3,b	1	2,1,a,4,3,b
2	5,6,a,7,8,b	2	5,6,a,7,8,b	2	5,6,a,7,8,b	2	5,6,a,7,8,b
3		3		3		3	
4		4		4		4	
5		5		5		5	
6		6		6		6	
7		7		7		7	
8		8		8		8	
9		9		9		9	
10		10		10		10	
11		11		11		11	
12		12		12		12	
13		13		13		13	
14		14		14		14	

15	
16	

15	
16	

15	
16	

15	
16	

Sequence 5

Ring	Phases
1	1,2,a,3,4,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 6

Ring	Phases
1	2,1,a,3,4,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 7

Ring	Phases
1	1,2,a,4,3,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 8

Ring	Phases
1	2,1,a,4,3,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 5

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 6

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 7

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 8

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 9

Ring	Phases
1	1,2,a,3,4,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 10

Ring	Phases
1	2,1,a,3,4,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 11

Ring	Phases
1	1,2,a,4,3,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 12

Ring	Phases
1	2,1,a,4,3,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 13

Ring	Phases
1	1,2,a,3,4,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

Sequence 14

Ring	Phases
1	2,1,a,3,4,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

Sequence 15

Ring	Phases
1	1,2,a,4,3,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

Sequence 16

Ring	Phases
1	2,1,a,4,3,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

14	
15	
16	

14	
15	
16	

14	
15	
16	

14	
15	
16	

Sequence 17

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 18

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 19

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 20

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 17

9	
10	
11	
12	
13	
14	
15	
16	

Sequence 18

9	
10	
11	
12	
13	
14	
15	
16	

Sequence 19

9	
10	
11	
12	
13	
14	
15	
16	

Sequence 20

9	
10	
11	
12	
13	
14	
15	
16	

Global Phase Recalls

Phase	1	2	3	4	5	6	7	8	9	1	1	1	1	1	1	1	1	1	2
Min																			
Max	X					X													
Ped																			
Act Walk Rest																			

Global Veh Det Diagnostics

Global No Activity	0
Global Max Presence	0
Global Erractic Count	0
Global Failed Recall	None
Detector Reset Enable	Enabled

Global Ped Det Diagnostics

Global No Activity	0
Global Max Presence	0
Global Erractic Count	0

Global Pri/Pre Det Diag

Global No Activity	0
Global Max Presence	0
Global Erractic Count	0

Vehicle Detection Parameters

Det.	Call Phs	Call Ped	Call Ovl	Add Call Phases	Sw Phs	Delay	Extend	Queue Limit	Ext Hold	No Activity	Max Pres	Erratic Counts	Failed Time	Failed Recall	Fail Link	Description
1	1	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
2	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
3	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
4	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
5	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
6	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
7	3	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
8	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
9	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
10	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
11	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
12	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
13	1	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
14	3	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
15	5	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	

16	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
17	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
18	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
19	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
20	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
21	7	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
22	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
23	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
24	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
25	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
26	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
27	5	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
28	7	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
29	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
30	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
31	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
32	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	

Det.	Call	Call	Call	Add Call	Sw			Queue	Ext	No	Max	Erratic	Failed	Failed	Fail	Description
	Phs	Ped	Ovl			Phases	Phs									
33	1	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
34	2	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
35	3	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
36	4	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
37	5	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
38	6	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
39	7	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
40	8	0	0		0	0.0	0.0	0	0.0	0	0	0	20	Max	0	
41	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
42	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
43	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
44	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
45	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
46	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
47	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
48	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
49	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
50	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
51	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
52	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
53	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
54	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
55	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
56	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
57	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
58	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
59	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
60	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
61	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
62	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
63	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
64	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
65	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
66	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
67	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
68	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
69	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
70	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	

71	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	0	0	None	0
72	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	0	0	None	0

Vehicle Detection Options

Detector	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Volume Detector																				
Occupancy																				
Yellow Lock Call																				
Red Lock call																				
Extend	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Added Initial																				
Queue																				
Call	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Terminate																				
Min Green 2																				
Protected Perm																				
Disable Dly Lead																				
Disable TS2 Diag																				

Detector	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Volume Detector																				
Occupancy																				
Yellow Lock Call																				
Red Lock call																				
Extend	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Added Initial																				
Queue																				
Call	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Terminate																				
Min Green 2																				
Protected Perm																				
Disable Dly Lead																				
Disable TS2 Diag																				

Detector	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Volume Detector																				
Occupancy																				
Yellow Lock Call																				
Red Lock call																				
Extend																				
Added Initial																				
Queue																				
Call																				
Terminate																				
Min Green 2																				
Protected Perm																				
Disable Dly Lead																				
Disable TS2 Diag																				

Detector	61	62	63	64	65	66	67	68	69	70	71	72
Volume Detector												
Occupancy												
Yellow Lock Call												
Red Lock call												
Extend												
Added Initial												
Queue												

Data Collection Period	0
Number of Periods	1

8	30	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 2

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
1	12	0	0				Fix	None	0	0	Float
2	53	0	0	X	X		Fix	Max Rcl	0	0	Float
3	15	0	0				Fix	None	0	0	Float
4	20	0	0				Fix	None	0	0	Float
5	15	0	0				Fix	None	0	0	Float
6	50	0	0	X	X		Fix	Max Rcl	0	0	Float
7	15	0	0				Fix	None	0	0	Float
8	20	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 3

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
1	15	0	0				Fix	None	0	0	Float
2	88	0	0	X	X		Fix	Max Rcl	0	0	Float
3	12	0	0				Fix	None	0	0	Float
4	25	0	0				Fix	None	0	0	Float
5	42	0	0				Fix	None	0	0	Float
6	61	0	0	X	X		Fix	Max Rcl	0	0	Float
7	12	0	0				Fix	None	0	0	Float
8	25	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 4

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float

8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 5				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 6				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float

Split 6				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 7				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float

6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 8

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 9

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float

Split 9

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 10

				Coord	Ref	Cover	Force Off				
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Pri	Pri	Pri
									Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float

J	A	S	O	N	D

17	18	19	20	21	22	23	24	25	26	27	28	29	30	31

Day Plan On _____

Month of Year		Days of Week					Days of Month																					
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	

Day Plan

Event	Hour	Min.	Act
1	5	30	1
2	9	0	2
3	14	0	3
4	18	0	10
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	7	30	2
2	18	0	10
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	19	0	4
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 17

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 18

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 19

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 20

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Actions		Aux.			Special Functions							
Act	Pattern	1	2	3	1	2	3	4	5	6	7	8
1	Pattern 1											
2	Pattern 2											
3	Pattern 3											
4	Pattern 4											
5	Pattern 5											
6	Pattern 6											
7	Pattern 7											
8	Pattern 8											
9	Pattern 9											
10	Free											
11	None											
12	None											
13	None											
14	None											
15	None											
16	None											
17	None											
18	None											
19	None											
20	None											
21	None											
22	None											
23	None											
24	None											
25	None											
26	None											
27	None											
28	None											
29	None											
30	None											
31	None											
32	None											

Actions		Aux.			Special Functions							
Act	Pattern	1	2	3	1	2	3	4	5	6	7	8
33	None											
34	None											
35	None											
36	None											
37	None											
38	None											
39	None											
40	None											
41	None											
42	None											
43	None											
44	None											
45	None											
46	None											
47	None											
48	None											
49	None											
50	None											
51	None											
52	None											
53	None											
54	None											
55	None											
56	None											
57	None											
58	None											
59	None											
60	None											
61	None											
62	None											
63	None											
64	None											

Action Commands

Action 1

Cmd	Command	Indexes
1	None	
2	None	

Action 2

Cmd	Command	Indexes
1	None	
2	None	

3	None	
4	None	
5	None	
6	None	
7	None	
8	None	
9	None	
10	None	

3	None	
4	None	
5	None	
6	None	
7	None	
8	None	
9	None	
10	None	

Master Sections By TOD

Action	1	2	3	4	5	6	7	8	9	0	1
Master Section 1											
Master Section 2											
Master Section 3											
Master Section 4											
Master Section 5											
Master Section 6											
Master Section 7											
Master Section 8											
Master Section 9											
Master Section 10											
Master Section 11											
Master Section 12											
Master Section 13											
Master Section 14											
Master Section 15											
Master Section 16											

Queue Responsive By TOD

Action	1	2	3	4	5	6	7	8	9	0	1
Queue Resp Plan 1											
Queue Resp Plan 2											
Queue Resp Plan 3											
Queue Resp Plan 4											
Queue Resp Plan 5											
Queue Resp Plan 6											
Queue Resp Plan 7											
Queue Resp Plan 8											
Queue Resp Plan 9											
Queue Resp Plan 10											
Queue Resp Plan 11											
Queue Resp Plan 12											
Queue Resp Plan 13											
Queue Resp Plan 14											
Queue Resp Plan 15											
Queue Resp Plan 16											

Preemption Parameters

Preempt	1	2	3	4	5	6	7	8
Link	0	0	0	0	0	0	0	0
Delay	0	0	0	0	0	0	0	0
Min Duration	0	0	0	0	0	0	0	0
Min Presence	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Max Presence	0	0	0	0	0	0	0	0
Enter Min Green	0	0	0	0	0	0	0	0
Enter Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Ent. Red Clear	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Min Walk	0	0	0	0	0	0	0	0
Ent. Ped Clear	255	255	255	255	255	255	255	255
Track Green	0	0	0	0	0	0	0	0
Max Track Grn	0	0	0	0	0	0	0	0
Track Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track Red Clear	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track 2 Green	0	0	0	0	0	0	0	0
Track 2 Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track 2 Red	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track Ext Gate Dn	0	0	0	0	0	0	0	0
Dwell Green	0	0	0	0	0	0	0	0
Exit Ped Clear	255	255	255	255	255	255	255	255
Exit Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Exit Red	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Dwell Ext Time	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Max Exit Green	0	0	0	0	0	0	0	0
Exit Max Time	0	0	0	0	0	0	0	0

Preempt	1	2	3	4	5	6	7	8
Non Lock Mem								
Not Override Flash								
NotOverrideNextPre								
Flash Dwell								
Ped Recycle								
Imm Ped Clear								
Dwell Only Status								
All Red Flash Dwell								
Allow All Overlaps								
Req All Red Entry								
Req Gate Dwn Trck Exit								
Req Gate Up Dwl Exit								
Normal On/Off Input								
Track Clear Override								
Aux Function 1								
Aux Function 2								
Aux Function 3								
Special Function 1								
Special Function 2								
Special Function 3								
Special Function 4								
Special Function 5								
Special Function 6								
Special Function 7								
Special Function 8								

Require CRC
Disabled

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Ped Service Limit	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pre Green	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Pre Clearance	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Phases	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Pre Clearance 2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Red Clear Ext Max	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Red Clear Ext Pass	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Jump	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Adv Warning Ext	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Phase Options

Phases	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Enable		X		X	X	X														
Auto Flash Ent.		X				X														
Auto Flash Exit		X				X														
Non Actuated I																				
Non Actuated II																				
Non Lock Mem	X	X	X	X	X	X	X	X												
Min Veh Recall																				
Max Veh Recall																				
Ped Recall																				
Soft Veh Recall																				
Dual Entry																				
Sim Gap Dis																				
Guaranteed Pass																				
Act Rest Walk																				
Cond Service																				
Add Initial																				
Ped Clr During Yel																				
Ped Clr During Red																				
Cond Reservice																				
Yel Min Override																				
No Startup Call																				
Adv. Warn Flasher																				
No Ped Str Up Call																				
Ped Clr OVTG																				
Flash Exit Call																				
Flash Exit Ped Call																				
MinGreen2																				
MaxGreen2																				
MaxGreen3																				
Ped2																				
Ped Clear Pre Clear																				
Ped NA+ Mode																				
Red Rest																				
Serve Evy Oth Even																				
Serve Evy Oth Odd																				
Coord Ped Yield																				
Ped Recycle																				
Coutdown																				

No Serve Phases

Sequence 1		Sequence 2		Sequence 3		Sequence 4	
Ph.	No Serve Phases	Ph.	No Serve Phases	Ph.	No Serve Phases	Ph.	No Serve Phases
1		1		1		1	
2		2		2		2	

3		3		3		3	
4		4		4		4	
5		5		5		5	
6		6		6		6	
7		7		7		7	
8		8		8		8	

Sequence 1		Sequence 2		Sequence 3		Sequence 4	
9		9		9		9	
10		10		10		10	
11		11		11		11	
12		12		12		12	
13		13		13		13	
14		14		14		14	
15		15		15		15	
16		16		16		16	

Phase Configuration

Ph.	Startup	Ring	Concurrent	Startup Min	Description
1	Phase Not On	0		0	
2	Green No Walk	1	5,6	0	
3	Phase Not On	0		0	
4	Phase Not On	1	8	0	
5	Phase Not On	2	2	0	
6	Green No Walk	2	2	0	
7	Phase Not On	0		0	
8	Phase Not On	2	4	0	
9	None	0		0	
10	None	0		0	
11	None	0		0	
12	None	0		0	
13	None	0		0	
14	None	0		0	
15	None	0		0	
16	None	0		0	
17	None	0		0	
18	None	0		0	
19	None	0		0	
20	None	0		0	

Sequence Configuration

Sequence 1		Sequence 2		Sequence 3		Sequence 4	
Ring	Phases	Ring	Phases	Ring	Phases	Ring	Phases
1	2,a,4,b	1	2,1,a,3,4,b	1	1,2,a,4,3,b	1	2,1,a,4,3,b
2	5,6,a,8,b	2	5,6,a,7,8,b	2	5,6,a,7,8,b	2	5,6,a,7,8,b
3		3		3		3	
4		4		4		4	
5		5		5		5	
6		6		6		6	
7		7		7		7	
8		8		8		8	
9		9		9		9	
10		10		10		10	
11		11		11		11	
12		12		12		12	
13		13		13		13	
14		14		14		14	

15	
16	

15	
16	

15	
16	

15	
16	

Sequence 5

Ring	Phases
1	1,2,a,3,4,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 6

Ring	Phases
1	2,1,a,3,4,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 7

Ring	Phases
1	1,2,a,4,3,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 8

Ring	Phases
1	2,1,a,4,3,b
2	6,5,a,7,8,b
3	
4	
5	
6	

Sequence 5

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 6

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 7

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 8

7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 9

Ring	Phases
1	1,2,a,3,4,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 10

Ring	Phases
1	2,1,a,3,4,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 11

Ring	Phases
1	1,2,a,4,3,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 12

Ring	Phases
1	2,1,a,4,3,b
2	5,6,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	

Sequence 13

Ring	Phases
1	1,2,a,3,4,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

Sequence 14

Ring	Phases
1	2,1,a,3,4,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

Sequence 15

Ring	Phases
1	1,2,a,4,3,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

Sequence 16

Ring	Phases
1	2,1,a,4,3,b
2	6,5,a,8,7,b
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	

14	
15	
16	

14	
15	
16	

14	
15	
16	

14	
15	
16	

Sequence 17

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 18

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 19

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 20

Ring	Phases
1	
2	
3	
4	
5	
6	
7	
8	

Sequence 17

9	
10	
11	
12	
13	
14	
15	
16	

Sequence 18

9	
10	
11	
12	
13	
14	
15	
16	

Sequence 19

9	
10	
11	
12	
13	
14	
15	
16	

Sequence 20

9	
10	
11	
12	
13	
14	
15	
16	

Global Phase Recalls

Phase	1	2	3	4	5	6	7	8	9	1	1	1	1	1	1	1	1	1	2
Min					X														
Max	X					X													
Ped																			
Act Walk Rest																			

Global Veh Det Diagnostics

Global No Activity	0
Global Max Presence	0
Global Erractic Count	0
Global Failed Recall	None
Detector Reset Enable	Enabled

Global Ped Det Diagnostics

Global No Activity	0
Global Max Presence	0
Global Erractic Count	0

Global Pri/Pre Det Diag

Global No Activity	0
Global Max Presence	0
Global Erractic Count	0

Vehicle Detection Parameters

Det.	Call Phs	Call Ped	Call Ovl	Add Call Phases	Sw Phs	Delay	Extend	Queue Limit	Ext Hold	No Activity	Max Pres	Erratic Counts	Failed Time	Failed Recall	Fail Link	Description
1	1	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
2	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
3	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
4	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
5	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
6	2	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
7	3	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
8	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
9	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
10	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
11	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
12	4	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
13	1	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
14	3	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
15	5	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	

16	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
17	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
18	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
19	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
20	6	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
21	7	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
22	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
23	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
24	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
25	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
26	8	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
27	5	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
28	7	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
29	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
30	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
31	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
32	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	

Det.	Call	Call	Call	Add Call	Sw			Queue	Ext	No	Max	Erratic	Failed	Failed	Fail	Description
	Phs	Ped	Ovl			Phases	Phs									
33	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
34	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
35	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
36	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
37	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
38	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
39	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
40	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
41	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
42	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
43	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
44	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
45	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
46	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
47	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
48	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
49	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
50	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
51	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
52	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
53	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
54	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
55	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
56	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
57	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
58	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
59	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
60	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
61	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
62	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
63	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
64	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
65	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
66	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
67	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
68	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
69	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	
70	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	None	0	

71	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	0	0	None	0
72	0	0	0		0	0.0	0.0	0	0.0	0	0	0	0	0	0	None	0

Vehicle Detection Options

Detector	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Volume Detector																				
Occupancy																				
Yellow Lock Call																				
Red Lock call																				
Extend	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Added Initial																				
Queue																				
Call	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Terminate																				
Min Green 2																				
Protected Perm																				
Disable Dly Lead																				
Disable TS2 Diag																				

Detector	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Volume Detector																				
Occupancy																				
Yellow Lock Call																				
Red Lock call																				
Extend	X	X	X	X	X	X	X	X												
Added Initial																				
Queue																				
Call	X	X	X	X	X	X	X	X												
Terminate																				
Min Green 2																				
Protected Perm																				
Disable Dly Lead																				
Disable TS2 Diag																				

Detector	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Volume Detector																				
Occupancy																				
Yellow Lock Call																				
Red Lock call																				
Extend																				
Added Initial																				
Queue																				
Call																				
Terminate																				
Min Green 2																				
Protected Perm																				
Disable Dly Lead																				
Disable TS2 Diag																				

Detector	61	62	63	64	65	66	67	68	69	70	71	72
Volume Detector												
Occupancy												
Yellow Lock Call												
Red Lock call												
Extend												
Added Initial												
Queue												

Data Collection Period	0
Number of Periods	1

8	40	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 2

Split 2				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	60	0	0	X	X		Fix	Max Rcl	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	40	0	0				Fix	None	0	0	Float
5	20	0	0				Fix	None	0	0	Float
6	40	0	0	X	X		Fix	Max Rcl	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	40	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 3

Split 3				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	75	0	0	X	X		Fix	Max Rcl	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	65	0	0				Fix	None	0	0	Float
5	25	0	0				Fix	None	0	0	Float
6	50	0	0	X	X		Fix	Max Rcl	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	65	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 4

Split 4				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float

8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 5				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 6				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float

Split 6				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 7				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float

6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 8

				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 9

				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float
3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float

Split 9

				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Split 10

				Coord	Ref	Cover	Force Off		Pri	Pri	Pri
PH.	Time	Min	Max	PH	PH	Ped	Mode	Mode	Min	Max	F. Off
1	0	0	0				Fix	None	0	0	Float
2	0	0	0				Fix	None	0	0	Float

3	0	0	0				Fix	None	0	0	Float
4	0	0	0				Fix	None	0	0	Float
5	0	0	0				Fix	None	0	0	Float
6	0	0	0				Fix	None	0	0	Float
7	0	0	0				Fix	None	0	0	Float
8	0	0	0				Fix	None	0	0	Float
9	0	0	0				Fix	None	0	0	Float
10	0	0	0				Fix	None	0	0	Float
11	0	0	0				Fix	None	0	0	Float
12	0	0	0				Fix	None	0	0	Float
13	0	0	0				Fix	None	0	0	Float
14	0	0	0				Fix	None	0	0	Float
15	0	0	0				Fix	None	0	0	Float
16	0	0	0				Fix	None	0	0	Float

Ring Plan 1

Ring	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Offset	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Early Coord Gap Out	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Day Plan 1 On

Month of Year	Days of Week							Days of Month																					
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		
X	X	X	X	X	X								X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Day Plan 2 On

Month of Year	Days of Week							Days of Month																					
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
X	X	X	X	X	X	X						X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		
X	X	X	X	X	X								X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Day Plan 3 On

Month of Year	Days of Week							Days of Month																					
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		
X	X	X	X	X	X								X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Day Plan 4 Off

Month of Year	Days of Week							Days of Month																					
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		
X	X	X	X	X	X								X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Day Plan 5 Off

Month of Year	Days of Week							Days of Month																					
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		
X	X	X	X	X	X								X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Day Plan 6 Off

Month of Year	Days of Week							Days of Month																				
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

J	A	S	O	N	D

17	18	19	20	21	22	23	24	25	26	27	28	29	30	31

Day Plan On _____

Month of Year					Days of Week					Days of Month																		
J	F	M	A	M	J	S	M	T	W	T	F	S	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
J	A	S	O	N	D								17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	

Day Plan

Event	Hour	Min.	Act
1	5	30	1
2	9	0	2
3	14	0	3
4	18	0	10
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	7	30	2
2	18	0	10
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	19	0	4
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

Day Plan

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 17

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 18

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 19

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Day Plan 20

Event	Hour	Min.	Act
1	0	0	
2	0	0	
3	0	0	
4	0	0	
5	0	0	
6	0	0	
7	0	0	
8	0	0	
9	0	0	
10	0	0	

Actions

Act	Pattern	Aux.			Special Functions															
		1	2	3	1	2	3	4	5	6	7	8								
1	Pattern 1																			
2	Pattern 2																			
3	Pattern 3																			
4	Pattern 4																			
5	Pattern 5																			
6	Pattern 6																			
7	Pattern 7																			
8	Pattern 8																			
9	Pattern 9																			
10	Free																			
11	None																			
12	None																			
13	None																			
14	None																			
15	None																			
16	None																			
17	None																			
18	None																			
19	None																			
20	None																			
21	None																			
22	None																			
23	None																			
24	None																			
25	None																			
26	None																			
27	None																			
28	None																			
29	None																			
30	None																			
31	None																			
32	None																			

Actions

Act	Pattern	Aux.			Special Functions															
		1	2	3	1	2	3	4	5	6	7	8								
33	None																			
34	None																			
35	None																			
36	None																			
37	None																			
38	None																			
39	None																			
40	None																			
41	None																			
42	None																			
43	None																			
44	None																			
45	None																			
46	None																			
47	None																			
48	None																			
49	None																			
50	None																			
51	None																			
52	None																			
53	None																			
54	None																			
55	None																			
56	None																			
57	None																			
58	None																			
59	None																			
60	None																			
61	None																			
62	None																			
63	None																			
64	None																			

Action Commands

Action 1

Cmd	Command	Indexes
1	None	
2	None	

Action 2

Cmd	Command	Indexes
1	None	
2	None	

3	None	
4	None	
5	None	
6	None	
7	None	
8	None	
9	None	
10	None	

3	None	
4	None	
5	None	
6	None	
7	None	
8	None	
9	None	
10	None	

Master Sections By TOD

Action	1	2	3	4	5	6	7	8	9	0
Master Section 1										
Master Section 2										
Master Section 3										
Master Section 4										
Master Section 5										
Master Section 6										
Master Section 7										
Master Section 8										
Master Section 9										
Master Section 10										
Master Section 11										
Master Section 12										
Master Section 13										
Master Section 14										
Master Section 15										
Master Section 16										

Queue Responsive By TOD

Action	1	2	3	4	5	6	7	8	9	0
Queue Resp Plan 1										
Queue Resp Plan 2										
Queue Resp Plan 3										
Queue Resp Plan 4										
Queue Resp Plan 5										
Queue Resp Plan 6										
Queue Resp Plan 7										
Queue Resp Plan 8										
Queue Resp Plan 9										
Queue Resp Plan 10										
Queue Resp Plan 11										
Queue Resp Plan 12										
Queue Resp Plan 13										
Queue Resp Plan 14										
Queue Resp Plan 15										
Queue Resp Plan 16										

Preemption Parameters

Preempt	1	2	3	4	5	6	7	8
Link	0	0	0	0	0	0	0	0
Delay	0	0	0	0	0	0	0	0
Min Duration	0	0	0	0	0	0	0	0
Min Presence	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Max Presence	0	0	0	0	0	0	0	0
Enter Min Green	0	0	0	0	0	0	0	0
Enter Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Ent. Red Clear	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Min Walk	0	0	0	0	0	0	0	0
Ent. Ped Clear	255	255	255	255	255	255	255	255
Track Green	0	0	0	0	0	0	0	0
Max Track Grn	0	0	0	0	0	0	0	0
Track Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track Red Clear	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track 2 Green	0	0	0	0	0	0	0	0
Track 2 Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track 2 Red	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Track Ext Gate Dn	0	0	0	0	0	0	0	0
Dwell Green	0	0	0	0	0	0	0	0
Exit Ped Clear	255	255	255	255	255	255	255	255
Exit Yellow	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Exit Red	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
Dwell Ext Time	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Max Exit Green	0	0	0	0	0	0	0	0
Exit Max Time	0	0	0	0	0	0	0	0

Preempt	1	2	3	4	5	6	7	8
Non Lock Mem								
Not Override Flash								
NotOverrideNextPre								
Flash Dwell								
Ped Recycle								
Imm Ped Clear								
Dwell Only Status								
All Red Flash Dwell								
Allow All Overlaps								
Req All Red Entry								
Req Gate Dwn Trck Exit								
Req Gate Up Dwl Exit								
Normal On/Off Input								
Track Clear Override								
Aux Function 1								
Aux Function 2								
Aux Function 3								
Special Function 1								
Special Function 2								
Special Function 3								
Special Function 4								
Special Function 5								
Special Function 6								
Special Function 7								
Special Function 8								

Require CRC
Disabled

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Pre	1	2	3	4	5	6	7	8
-----	---	---	---	---	---	---	---	---

Peer Configuration

Ctrl	Peer ID	Device Type	IP address	IP Port	Http Port	Serial Port	Serial Addr.	Master Sect.	P2P TO	Description
1	0	Peer MaxTime		161	80	0	0	0	15	
2	0	Peer MaxTime		161	80	0	0	0	15	
3	0	Peer MaxTime		161	80	0	0	0	15	
4	0	Peer MaxTime		161	80	0	0	0	15	
5	0	Peer MaxTime		161	80	0	0	0	15	
6	0	Peer MaxTime		161	80	0	0	0	15	
7	0	Peer MaxTime		161	80	0	0	0	15	
8	0	Peer MaxTime		161	80	0	0	0	15	
9	0	Peer MaxTime		161	80	0	0	0	15	
10	0	Peer MaxTime		161	80	0	0	0	15	

Master Section Configuration

Section	Control	Poll	Req #	Fail Time	Algorithm Period	Description
1	None	60	1	300	240	
2	None	60	1	300	240	
3	None	60	1	300	240	
4	None	60	1	300	240	
5	None	60	1	300	240	
6	None	60	1	300	240	
7	None	60	1	300	240	
8	None	60	1	300	240	
9	None	60	1	300	240	
10	None	60	1	300	240	
11	None	60	1	300	240	
12	None	60	1	300	240	
13	None	60	1	300	240	
14	None	60	1	300	240	
15	None	60	1	300	240	
16	None	60	1	300	240	

User Program Info

Pgrm	Description	Pgrm	Description
1		17	
2		18	
3		19	
4		20	
5		21	
6		22	
7		23	
8		24	
9		25	
10		26	
11		27	
12		28	
13		29	
14		30	
15		31	
16		32	

APPENDIX B

Level of Service Definitions

The following information is referenced from the Highway Capacity Manual: A Guide for Multimodal Mobility Analysis, 7th Edition, Transportation Research Board, 2022: Chapter 19 – Signalized Intersections.

Motorized Vehicle Level of Service (LOS) for Signalized Intersections

Levels of service are defined to represent reasonable ranges in control delay.

LOS A Describes operations with a control delay of 10 s/veh or less and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is low and either progression is exceptionally favorable or the cycle length is very short. If it is due to favorable progression, most vehicles arrive during the green indication and travel through the intersection without stopping.

LOS B Describes operations with control delay between 10 and 20 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is low and either progression is highly favorable or the cycle length is short. More vehicles stop than with LOS A.

LOS C Describes operations with control delay between 20 and 35 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when progression is favorable or the cycle length is moderate. Individual *cycle failures* (i.e., one or more queued vehicles are not able to depart as a result of insufficient capacity during the cycle) may begin to appear at this level. The number of vehicles stopping is significant, although many vehicles still pass through the intersection without stopping.

LOS D Describes operations with control delay between 35 and 55 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is high and either progression is ineffective or the cycle length is long. Many vehicles stop and individual cycle failures are noticeable.

LOS E Describes operations with control delay between 55 and 80 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is high, progression is unfavorable, and the cycle length is long. Individual cycle failures are frequent.

LOS F Describes operations with control delay exceeding 80 s/veh or a volume-to-capacity ratio greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is very high, progression is very poor, and the cycle length is long. Most cycles fail to clear the queue.

Control Delay (s/veh)	LOS by Volume-to-Capacity Ratio ^a	
	$v/c \leq 1.0$	$v/c > 1.0$
≤ 10	A	F
> 10 – 20	B	F
> 20 – 35	C	F
> 35 – 55	D	F
> 55 – 80	E	F
> 80	F	F

Note: ^a For approach-based and intersectionwide assessments, LOS is defined solely by control delay.

The following information is referenced from the Highway Capacity Manual: A Guide for Multimodal Mobility Analysis, 7th Edition, Transportation Research Board, 2022: Chapter 20 – Two-Way Stop-Controlled Intersections, Chapter 21 – All-Way Stop-Controlled Intersections, and Chapter 22 - Roundabouts.

Motorized Vehicle Level of Service (LOS) for Unsignalized & Roundabout Intersections

LOS is a quantitative stratification of performance measure(s) representing quality of service. Quality of service describes how well a transportation facility or service operates from a traveler’s perspective. LOS is measured on an A – F scale, with LOS A representing the best operating conditions from a traveler’s perspective.

Control Delay (s/veh)	LOS by Volume-to-Capacity Ratio ^a	
	v/c ≤ 1.0	v/c > 1.0
0 – 10	A	F
> 10 – 15	B	F
> 15 – 25	C	F
> 25 – 35	D	F
> 35 – 50	E	F
> 50	F	F

Note: The LOS criteria apply to each lane on a given approach and to each approach on the minor street. LOS is not calculated for major-street approaches or for the intersection as a whole.

^a For approaches and intersectionwide assessment, LOS is defined solely by control delay.

APPENDIX C

Capacity Worksheets

Timings

1: U.S. Highway 24 & Meridian Road

Existing Traffic Conditions

AM Peak Traffic Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	10	429	755	31	307	33	206	300	34	61	553	2
Future Volume (vph)	10	429	755	31	307	33	206	300	34	61	553	2
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	1770	1863	1583	1770	1863	1583
Flt Permitted	0.473			0.232			0.271			0.559		
Satd. Flow (perm)	881	3539	1583	432	3539	1583	505	1863	1583	1041	1863	1583
Satd. Flow (RTOR)			529			160			105			105
Lane Group Flow (vph)	11	466	821	34	334	36	224	326	37	66	601	2
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free	2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		6.0	20.0	20.0	6.0	20.0	20.0
Minimum Split (s)	11.0	12.5		11.0	12.5		11.0	27.0	27.0	11.0	27.0	27.0
Total Split (s)	20.0	30.0		20.0	30.0		20.0	75.0	75.0	15.0	70.0	70.0
Total Split (%)	14.3%	21.4%		14.3%	21.4%		14.3%	53.6%	53.6%	10.7%	50.0%	50.0%
Yellow Time (s)	3.0	4.5		3.0	4.5		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.5		5.0	6.5		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	29.1	23.6	140.0	31.9	26.9	140.0	96.5	84.6	84.6	87.5	78.1	78.1
Actuated g/C Ratio	0.21	0.17	1.00	0.23	0.19	1.00	0.69	0.60	0.60	0.63	0.56	0.56
v/c Ratio	0.05	0.78	0.52	0.20	0.49	0.02	0.49	0.29	0.04	0.10	0.58	0.00
Control Delay (s/veh)	35.6	65.2	1.2	39.6	52.4	0.0	13.0	16.9	0.1	5.6	18.3	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	35.6	65.2	1.2	39.6	52.4	0.0	13.0	16.9	0.1	5.6	18.3	0.0
LOS	D	E	A	D	D	A	B	B	A	A	B	A
Approach Delay (s/veh)		24.5			46.7			14.4			17.0	
Approach LOS		C			D			B			B	
Queue Length 50th (ft)	8	220	0	24	134	0	75	156	0	8	382	0
Queue Length 95th (ft)	22	271	0	49	190	0	132	257	0	18	596	m0
Internal Link Dist (ft)		767			477			489			1049	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	303	633	1583	245	716	1583	485	1126	998	722	1039	929
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.04	0.74	0.52	0.14	0.47	0.02	0.46	0.29	0.04	0.09	0.58	0.00

Intersection Summary

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 4 (3%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Existing Traffic Conditions
 AM Peak Traffic Hour

Maximum v/c Ratio: 0.78	
Intersection Signal Delay (s/veh): 23.8	Intersection LOS: C
Intersection Capacity Utilization 77.0%	ICU Level of Service D
Analysis Period (min) 15	














m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
2: U.S. Highway 24 & E Woodmen Road

Existing Traffic Conditions
AM Peak Traffic Hour

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations			 			
Traffic Volume (vph)	201	107	141	244	448	353
Future Volume (vph)	201	107	141	244	448	353
Satd. Flow (prot)	1770	1583	3433	1863	1863	1583
Flt Permitted	0.950		0.410			
Satd. Flow (perm)	1770	1583	1482	1863	1863	1583
Satd. Flow (RTOR)		116				337
Lane Group Flow (vph)	218	116	153	265	487	384
Turn Type	Prot	Free	pm+pt	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free	2			Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	40.0		20.0	100.0	80.0	
Total Split (%)	28.6%		14.3%	71.4%	57.1%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	22.5	140.0	107.5	105.5	93.4	140.0
Actuated g/C Ratio	0.16	1.00	0.77	0.75	0.67	1.00
v/c Ratio	0.77	0.07	0.12	0.19	0.39	0.24
Control Delay (s/veh)	73.2	0.1	8.2	10.5	12.6	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	73.2	0.1	8.2	10.5	12.6	0.4
LOS	E	A	A	B	B	A
Approach Delay (s/veh)	47.8			9.7	7.2	
Approach LOS	D			A	A	
Queue Length 50th (ft)	195	0	37	142	189	0
Queue Length 95th (ft)	273	0	64	228	312	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	442	1583	1346	1403	1242	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.49	0.07	0.11	0.19	0.39	0.24

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 95 (68%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 60
 Control Type: Actuated-Coordinated

Timings
2: U.S. Highway 24 & E Woodmen Road

Existing Traffic Conditions
AM Peak Traffic Hour

Maximum v/c Ratio: 0.77

Intersection Signal Delay (s/veh): 16.2

Intersection LOS: B

Intersection Capacity Utilization 53.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Timings

1: U.S. Highway 24 & Meridian Road

Existing Traffic Conditions

PM Peak Traffic Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	30	310	312	34	426	66	589	705	30	112	420	2
Future Volume (vph)	30	310	312	34	426	66	589	705	30	112	420	2
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	1770	1863	1583	1770	1863	1583
Flt Permitted	0.198			0.308			0.300			0.313		
Satd. Flow (perm)	369	3539	1583	574	3539	1583	559	1863	1583	583	1863	1583
Satd. Flow (RTOR)			339			187			94			132
Lane Group Flow (vph)	33	337	339	37	463	72	640	766	33	122	457	2
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free	2		2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		5.0	25.0	25.0	5.0	25.0	25.0
Minimum Split (s)	11.0	11.0		11.0	11.0		10.0	32.0	32.0	10.0	32.0	32.0
Total Split (s)	12.0	25.0		12.0	25.0		42.0	88.0	88.0	15.0	61.0	61.0
Total Split (%)	8.6%	17.9%		8.6%	17.9%		30.0%	62.9%	62.9%	10.7%	43.6%	43.6%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	24.7	19.2	140.0	25.8	21.6	140.0	101.2	85.8	85.8	71.4	61.1	61.1
Actuated g/C Ratio	0.18	0.14	1.00	0.18	0.15	1.00	0.72	0.61	0.61	0.51	0.44	0.44
v/c Ratio	0.25	0.69	0.21	0.23	0.85	0.05	0.93	0.67	0.03	0.33	0.56	0.00
Control Delay (s/veh)	47.8	65.8	0.3	46.6	72.9	0.1	36.3	22.6	0.1	14.5	36.4	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	47.8	65.8	0.3	46.6	72.9	0.1	36.3	22.6	0.1	14.5	36.4	0.0
LOS	D	E	A	D	E	A	D	C	A	B	D	A
Approach Delay (s/veh)		33.6			62.1			28.2			31.7	
Approach LOS		C			E			C			C	
Queue Length 50th (ft)	24	157	0	27	225	0	309	474	0	32	193	0
Queue Length 95th (ft)	55	213	0	60	#328	0	#549	647	0	107	444	m0
Internal Link Dist (ft)		767			477			489			1049	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	135	505	1583	165	547	1583	724	1142	1006	389	812	764
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.24	0.67	0.21	0.22	0.85	0.05	0.88	0.67	0.03	0.31	0.56	0.00

Intersection Summary

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 4 (3%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Timings

1: U.S. Highway 24 & Meridian Road

Existing Traffic Conditions

PM Peak Traffic Hour

Maximum v/c Ratio: 0.93

Intersection Signal Delay (s/veh): 35.8

Intersection LOS: D

Intersection Capacity Utilization 89.8%

ICU Level of Service E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.














m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
2: U.S. Highway 24 & E Woodmen Road

Existing Traffic Conditions
PM Peak Traffic Hour

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations			 			
Traffic Volume (vph)	505	125	335	508	336	330
Future Volume (vph)	505	125	335	508	336	330
Satd. Flow (prot)	1770	1583	3433	1863	1863	1583
Flt Permitted	0.950		0.392			
Satd. Flow (perm)	1770	1583	1417	1863	1863	1583
Satd. Flow (RTOR)		70				359
Lane Group Flow (vph)	549	136	364	552	365	359
Turn Type	Prot	Free	pm+pt	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free	2			Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	65.0		25.0	75.0	50.0	
Total Split (%)	46.4%		17.9%	53.6%	35.7%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	49.8	140.0	80.2	78.2	60.4	140.0
Actuated g/C Ratio	0.36	1.00	0.57	0.56	0.43	1.00
v/c Ratio	0.87	0.09	0.37	0.53	0.45	0.23
Control Delay (s/veh)	56.9	0.1	21.5	28.0	33.0	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	56.9	0.1	21.5	28.0	33.0	0.3
LOS	E	A	C	C	C	A
Approach Delay (s/veh)	45.6			25.4	16.8	
Approach LOS	D			C	B	
Queue Length 50th (ft)	469	0	90	302	237	0
Queue Length 95th (ft)	563	0	146	444	392	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	758	1583	1099	1040	803	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.72	0.09	0.33	0.53	0.45	0.23

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 6 (4%), Referenced to phase 2:NBTL and 6:SBT, Start of Green
 Natural Cycle: 70
 Control Type: Actuated-Coordinated

Timings
2: U.S. Highway 24 & E Woodmen Road

Existing Traffic Conditions
PM Peak Traffic Hour

Maximum v/c Ratio: 0.87

Intersection Signal Delay (s/veh): 28.7


Intersection LOS: C

Intersection Capacity Utilization 72.5%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road

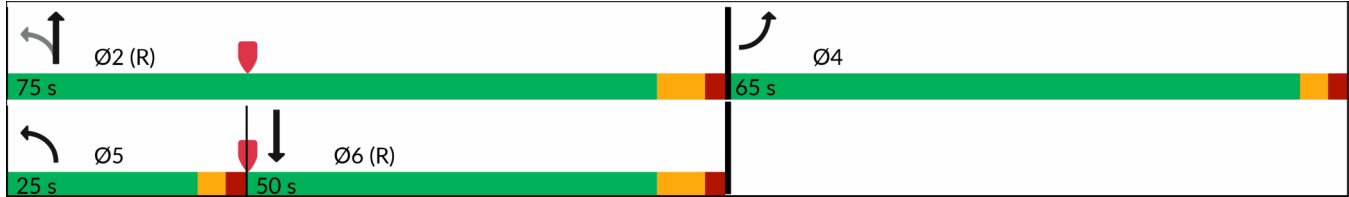

Timings
1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
AM Peak Traffic Hour - Year 2028

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	10	446	785	32	319	34	214	312	35	63	575	2
Future Volume (vph)	10	446	785	32	319	34	214	312	35	63	575	2
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.487			0.229			0.950			0.548		
Satd. Flow (perm)	907	3539	1583	427	3539	1583	3433	3539	1583	1021	3539	1583
Satd. Flow (RTOR)			602			199			105			144
Lane Group Flow (vph)	11	485	853	35	347	37	233	339	38	68	625	2
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		6.0	20.0	20.0	6.0	20.0	20.0
Minimum Split (s)	11.0	12.5		11.0	12.5		11.0	27.0	27.0	11.0	27.0	27.0
Total Split (s)	13.0	45.0		13.0	45.0		26.0	69.0	69.0	13.0	56.0	56.0
Total Split (%)	9.3%	32.1%		9.3%	32.1%		18.6%	49.3%	49.3%	9.3%	40.0%	40.0%
Yellow Time (s)	3.0	4.5		3.0	4.5		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.5		5.0	6.5		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	31.3	24.6	140.0	34.5	29.8	140.0	14.8	81.5	81.5	81.7	72.1	72.1
Actuated g/C Ratio	0.22	0.18	1.00	0.25	0.21	1.00	0.11	0.58	0.58	0.58	0.52	0.52
v/c Ratio	0.05	0.78	0.54	0.20	0.46	0.02	0.65	0.16	0.04	0.11	0.34	0.00
Control Delay (s/veh)	35.0	64.2	1.3	38.3	49.9	0.0	68.3	15.9	0.1	8.0	16.9	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	35.0	64.2	1.3	38.3	49.9	0.0	68.3	15.9	0.1	8.0	16.9	0.0
LOS	C	E	A	D	D	A	E	B	A	A	B	A
Approach Delay (s/veh)		24.2			44.5			34.9			16.0	
Approach LOS		C			D			C			B	
Queue Length 50th (ft)	7	228	0	24	138	0	108	79	0	12	181	0
Queue Length 95th (ft)	23	280	0	50	198	0	150	123	0	28	263	m0
Internal Link Dist (ft)		767			477			489			532	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	259	973	1583	181	973	1583	514	2060	965	646	1823	885
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.04	0.50	0.54	0.19	0.36	0.02	0.45	0.16	0.04	0.11	0.34	0.00

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green
 Natural Cycle: 65
 Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
 AM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.78	
Intersection Signal Delay (s/veh): 27.2	Intersection LOS: C
Intersection Capacity Utilization 59.7%	ICU Level of Service B
Analysis Period (min) 15	

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
AM Peak Traffic Hour - Year 2028



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	209	111	147	254	466	367
Future Volume (vph)	209	111	147	254	466	367
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		121				399
Lane Group Flow (vph)	227	121	160	276	507	399
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	39.0		31.0	101.0	70.0	
Total Split (%)	27.9%		22.1%	72.1%	50.0%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	14.6	140.0	11.9	113.4	96.5	140.0
Actuated g/C Ratio	0.10	1.00	0.09	0.81	0.69	1.00
v/c Ratio	0.63	0.08	0.55	0.10	0.21	0.25
Control Delay (s/veh)	68.0	0.1	57.9	7.9	8.6	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	68.0	0.1	57.9	7.9	8.6	0.4
LOS	E	A	E	A	A	A
Approach Delay (s/veh)	44.4			26.2	5.0	
Approach LOS	D			C	A	
Queue Length 50th (ft)	105	0	74	66	82	0
Queue Length 95th (ft)	146	0	111	98	126	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	833	1583	637	2866	2439	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.27	0.08	0.25	0.10	0.21	0.25

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 95 (68%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 55
 Control Type: Actuated-Coordinated

Timings
2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
AM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.63

Intersection Signal Delay (s/veh): 18.6

Intersection LOS: B

Intersection Capacity Utilization 46.0%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Timings
1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
PM Peak Traffic Hour - Year 2028

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	31	322	324	35	443	69	613	733	35	63	437	2
Future Volume (vph)	31	322	324	35	443	69	613	733	35	63	437	2
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.234			0.340			0.950			0.350		
Satd. Flow (perm)	436	3539	1583	633	3539	1583	3433	3539	1583	652	3539	1583
Satd. Flow (RTOR)			352			187			94			132
Lane Group Flow (vph)	34	350	352	38	482	75	666	797	38	68	475	2
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		5.0	25.0	25.0	5.0	25.0	25.0
Minimum Split (s)	11.0	11.0		11.0	11.0		10.0	32.0	32.0	10.0	32.0	32.0
Total Split (s)	13.0	38.0		13.0	38.0		49.0	76.0	76.0	13.0	40.0	40.0
Total Split (%)	9.3%	27.1%		9.3%	27.1%		35.0%	54.3%	54.3%	9.3%	28.6%	28.6%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	29.3	23.3	140.0	30.5	25.7	140.0	32.9	84.3	84.3	66.0	56.6	56.6
Actuated g/C Ratio	0.21	0.17	1.00	0.22	0.18	1.00	0.24	0.60	0.60	0.47	0.40	0.40
v/c Ratio	0.21	0.60	0.22	0.19	0.74	0.05	0.83	0.37	0.04	0.19	0.33	0.00
Control Delay (s/veh)	40.5	57.8	0.3	39.8	61.3	0.1	59.7	17.0	0.1	14.7	33.7	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	40.5	57.8	0.3	39.8	61.3	0.1	59.7	17.0	0.1	14.7	33.7	0.0
LOS	D	E	A	D	E	A	E	B	A	B	C	A
Approach Delay (s/veh)		29.5			52.2			35.5			31.2	
Approach LOS		C			D			D			C	
Queue Length 50th (ft)	24	158	0	27	227	0	304	211	0	20	122	0
Queue Length 95th (ft)	50	202	0	54	278	0	352	295	0	63	232	m0
Internal Link Dist (ft)		767			477			489			630	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	168	834	1583	202	834	1583	1078	2131	990	378	1431	719
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.20	0.42	0.22	0.19	0.58	0.05	0.62	0.37	0.04	0.18	0.33	0.00

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green
 Natural Cycle: 80
 Control Type: Actuated-Coordinated


Timings
 1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
 PM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.83	
Intersection Signal Delay (s/veh): 36.5	Intersection LOS: D
Intersection Capacity Utilization 73.9%	ICU Level of Service D
Analysis Period (min) 15	





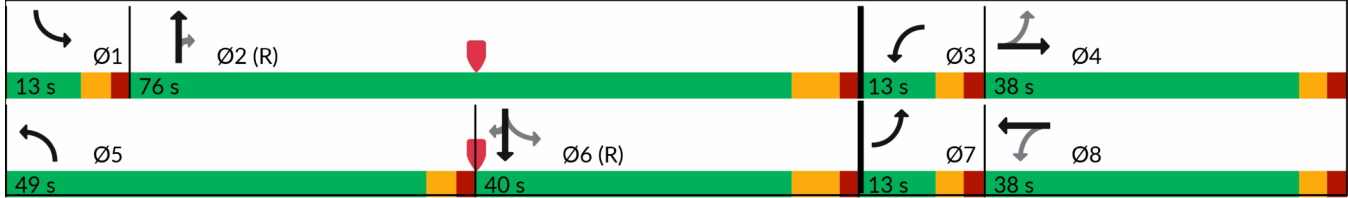











m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
 2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
 PM Peak Traffic Hour - Year 2028

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	 		 	 	 	
Traffic Volume (vph)	525	130	348	528	349	343
Future Volume (vph)	525	130	348	528	349	343
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		136				373
Lane Group Flow (vph)	571	141	378	574	379	373
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	53.0		40.0	87.0	47.0	
Total Split (%)	37.9%		28.6%	62.1%	33.6%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effect Green (s)	29.1	140.0	20.8	98.9	73.1	140.0
Actuated g/C Ratio	0.21	1.00	0.15	0.71	0.52	1.00
v/c Ratio	0.80	0.09	0.74	0.23	0.21	0.24
Control Delay (s/veh)	61.3	0.1	71.9	7.3	19.7	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	61.3	0.1	71.9	7.3	19.7	0.3
LOS	E	A	E	A	B	A
Approach Delay (s/veh)	49.2			32.9	10.1	
Approach LOS	D			C	B	
Queue Length 50th (ft)	261	0	189	78	95	0
Queue Length 95th (ft)	309	0	242	109	153	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	1177	1583	858	2499	1847	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.49	0.09	0.44	0.23	0.21	0.24

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 6 (4%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 60
 Control Type: Actuated-Coordinated

Timings
 2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
 PM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.80	
Intersection Signal Delay (s/veh): 30.6	Intersection LOS: C
Intersection Capacity Utilization 59.9%	ICU Level of Service B
Analysis Period (min) 15	

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Timings
1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
AM Peak Traffic Hour - Year 2045

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	15	626	1102	45	448	48	301	438	50	89	807	3
Future Volume (vph)	15	626	1102	45	448	48	301	438	50	89	807	3
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.361			0.157			0.950			0.480		
Satd. Flow (perm)	672	3539	1583	292	3539	1583	3433	3539	1583	894	3539	1583
Satd. Flow (RTOR)			541			199			105			144
Lane Group Flow (vph)	16	680	1198	49	487	52	327	476	54	97	877	3
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		6.0	20.0	20.0	6.0	20.0	20.0
Minimum Split (s)	11.0	12.5		11.0	12.5		11.0	27.0	27.0	11.0	27.0	27.0
Total Split (s)	11.0	45.0		11.0	45.0		26.0	73.0	73.0	11.0	58.0	58.0
Total Split (%)	7.9%	32.1%		7.9%	32.1%		18.6%	52.1%	52.1%	7.9%	41.4%	41.4%
Yellow Time (s)	3.0	4.5		3.0	4.5		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.5		5.0	6.5		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	38.7	32.4	140.0	40.7	36.8	140.0	18.1	72.8	72.8	71.7	62.2	62.2
Actuated g/C Ratio	0.28	0.23	1.00	0.29	0.26	1.00	0.13	0.52	0.52	0.51	0.44	0.44
v/c Ratio	0.07	0.83	0.76	0.33	0.52	0.03	0.74	0.26	0.06	0.19	0.56	0.00
Control Delay (s/veh)	31.0	60.4	3.4	37.7	46.0	0.0	69.0	20.4	0.1	11.2	24.6	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	31.0	60.4	3.4	37.7	46.0	0.0	69.0	20.4	0.1	11.2	24.6	0.0
LOS	C	E	A	D	D	A	E	C	A	B	C	A
Approach Delay (s/veh)		24.1			41.3			37.7			23.2	
Approach LOS		C			D			D			C	
Queue Length 50th (ft)	10	315	0	31	188	0	152	133	0	19	324	0
Queue Length 95th (ft)	26	371	0	60	258	0	202	179	0	65	437	m0
Internal Link Dist (ft)		767			477			489			532	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	232	973	1583	148	1010	1583	514	1840	873	505	1573	783
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.07	0.70	0.76	0.33	0.48	0.03	0.64	0.26	0.06	0.19	0.56	0.00

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green
 Natural Cycle: 80
 Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
 AM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.83	
Intersection Signal Delay (s/veh): 28.9	Intersection LOS: C
Intersection Capacity Utilization 72.8%	ICU Level of Service C
Analysis Period (min) 15	

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
 2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
 AM Peak Traffic Hour - Year 2045



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	293	183	206	356	654	515
Future Volume (vph)	293	183	206	356	654	515
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		199				560
Lane Group Flow (vph)	318	199	224	387	711	560
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	38.0		31.0	102.0	71.0	
Total Split (%)	27.1%		22.1%	72.9%	50.7%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	18.3	140.0	14.4	109.7	90.3	140.0
Actuated g/C Ratio	0.13	1.00	0.10	0.78	0.65	1.00
v/c Ratio	0.71	0.13	0.63	0.14	0.31	0.35
Control Delay (s/veh)	67.0	0.2	54.7	7.5	12.2	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	67.0	0.2	54.7	7.5	12.2	0.6
LOS	E	A	D	A	B	A
Approach Delay (s/veh)	41.3			24.8	7.1	
Approach LOS	D			C	A	
Queue Length 50th (ft)	147	0	104	101	144	0
Queue Length 95th (ft)	193	0	145	144	214	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	809	1583	637	2773	2282	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.39	0.13	0.35	0.14	0.31	0.35

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 95 (68%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 55
 Control Type: Actuated-Coordinated

Timings
2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
AM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.71

Intersection Signal Delay (s/veh): 19.0

Intersection LOS: B

Intersection Capacity Utilization 49.2%

ICU Level of Service A

Analysis Period (min) 15

























Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Timings

1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
PM Peak Traffic Hour - Year 2045

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	44	453	456	50	622	96	860	1029	44	164	613	3
Future Volume (vph)	44	453	456	50	622	96	860	1029	44	164	613	3
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.131			0.266			0.950			0.255		
Satd. Flow (perm)	244	3539	1583	495	3539	1583	3433	3539	1583	475	3539	1583
Satd. Flow (RTOR)			496			187			94			132
Lane Group Flow (vph)	48	492	496	54	676	104	935	1118	48	178	666	3
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		5.0	25.0	25.0	5.0	25.0	25.0
Minimum Split (s)	11.0	11.0		11.0	11.0		10.0	32.0	32.0	10.0	32.0	32.0
Total Split (s)	11.0	38.0		11.0	38.0		50.0	72.0	72.0	19.0	41.0	41.0
Total Split (%)	7.9%	27.1%		7.9%	27.1%		35.7%	51.4%	51.4%	13.6%	29.3%	29.3%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	35.4	30.6	140.0	35.4	30.6	140.0	42.3	72.5	72.5	54.3	41.2	41.2
Actuated g/C Ratio	0.25	0.22	1.00	0.25	0.22	1.00	0.30	0.52	0.52	0.39	0.29	0.29
v/c Ratio	0.38	0.64	0.31	0.30	0.87	0.07	0.90	0.61	0.06	0.62	0.64	0.01
Control Delay (s/veh)	43.3	53.4	0.5	39.4	65.7	0.1	59.1	27.1	0.1	39.7	63.5	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	43.3	53.4	0.5	39.4	65.7	0.1	59.1	27.1	0.1	39.7	63.5	0.0
LOS	D	D	A	D	E	A	E	C	A	D	E	A
Approach Delay (s/veh)		27.6			55.8			40.7			58.3	
Approach LOS		C			E			D			E	
Queue Length 50th (ft)	31	215	0	36	314	0	420	401	0	112	266	0
Queue Length 95th (ft)	64	275	0	70	390	0	503	499	1	203	401	m0
Internal Link Dist (ft)		767			477			489			630	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	127	834	1583	180	834	1583	1103	1831	864	323	1041	559
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.38	0.59	0.31	0.30	0.81	0.07	0.85	0.61	0.06	0.55	0.64	0.01

Intersection Summary

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Background Traffic Conditions
 PM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.90

Intersection Signal Delay (s/veh): 43.6

Intersection LOS: D


Intersection Capacity Utilization 85.9%

ICU Level of Service E

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road

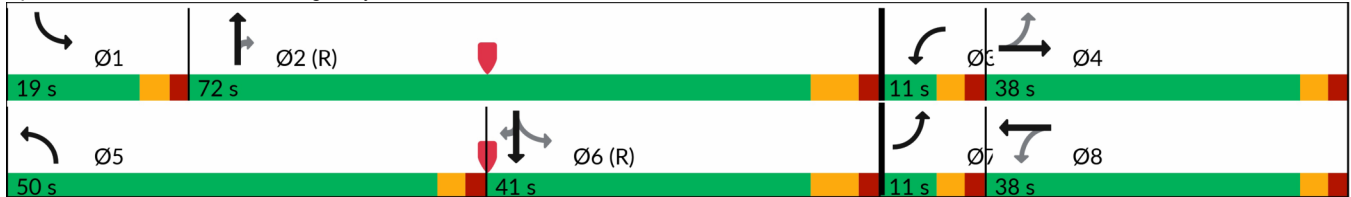

Timings
2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
PM Peak Traffic Hour - Year 2045



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	737	156	489	742	491	482
Future Volume (vph)	737	156	489	742	491	482
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		116				524
Lane Group Flow (vph)	801	170	532	807	534	524
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	56.0		41.0	84.0	43.0	
Total Split (%)	40.0%		29.3%	60.0%	30.7%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	39.2	140.0	26.9	88.8	56.8	140.0
Actuated g/C Ratio	0.28	1.00	0.19	0.63	0.41	1.00
v/c Ratio	0.83	0.11	0.81	0.36	0.37	0.33
Control Delay (s/veh)	55.2	0.1	70.3	18.2	31.9	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	55.2	0.1	70.3	18.2	31.9	0.6
LOS	E	A	E	B	C	A
Approach Delay (s/veh)	45.6			38.9	16.4	
Approach LOS	D			D	B	
Queue Length 50th (ft)	359	0	265	183	180	0
Queue Length 95th (ft)	405	0	325	282	270	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	1250	1583	882	2243	1436	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.11	0.60	0.36	0.37	0.33

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 6 (4%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 70
 Control Type: Actuated-Coordinated

Timings
2: U.S. Highway 24 & E Woodmen Road

Background Traffic Conditions
PM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.83

Intersection Signal Delay (s/veh): 33.7

Intersection LOS: C

Intersection Capacity Utilization 70.0%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Timings

1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
AM Peak Traffic Hour - Year 2028

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	11	446	785	32	319	34	214	326	35	63	618	2
Future Volume (vph)	11	446	785	32	319	34	214	326	35	63	618	2
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.487			0.229			0.950			0.540		
Satd. Flow (perm)	907	3539	1583	427	3539	1583	3433	3539	1583	1006	3539	1583
Satd. Flow (RTOR)			595			199			105			144
Lane Group Flow (vph)	12	485	853	35	347	37	233	354	38	68	672	2
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		6.0	20.0	20.0	6.0	20.0	20.0
Minimum Split (s)	11.0	12.5		11.0	12.5		11.0	27.0	27.0	11.0	27.0	27.0
Total Split (s)	13.0	45.0		13.0	45.0		26.0	69.0	69.0	13.0	56.0	56.0
Total Split (%)	9.3%	32.1%		9.3%	32.1%		18.6%	49.3%	49.3%	9.3%	40.0%	40.0%
Yellow Time (s)	3.0	4.5		3.0	4.5		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.5		5.0	6.5		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	31.3	24.6	140.0	34.5	29.8	140.0	14.8	81.5	81.5	81.7	72.1	72.1
Actuated g/C Ratio	0.22	0.18	1.00	0.25	0.21	1.00	0.11	0.58	0.58	0.58	0.52	0.52
v/c Ratio	0.05	0.78	0.54	0.20	0.46	0.02	0.65	0.17	0.04	0.11	0.37	0.00
Control Delay (s/veh)	35.1	64.2	1.3	38.3	49.9	0.0	68.3	15.9	0.1	8.9	17.3	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	35.1	64.2	1.3	38.3	49.9	0.0	68.3	15.9	0.1	8.9	17.3	0.0
LOS	D	E	A	D	D	A	E	B	A	A	B	A
Approach Delay (s/veh)		24.2			44.5			34.5			16.5	
Approach LOS		C			D			C			B	
Queue Length 50th (ft)	8	228	0	24	138	0	108	83	0	15	198	0
Queue Length 95th (ft)	24	280	0	50	198	0	150	127	0	35	284	m0
Internal Link Dist (ft)		767			477			489			532	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	259	973	1583	181	973	1583	514	2060	965	637	1823	885
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.05	0.50	0.54	0.19	0.36	0.02	0.45	0.17	0.04	0.11	0.37	0.00

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green
 Natural Cycle: 65
 Control Type: Actuated-Coordinated

Timings

1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
AM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.78

Intersection Signal Delay (s/veh): 27.1

Intersection LOS: C


Intersection Capacity Utilization 60.1%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road

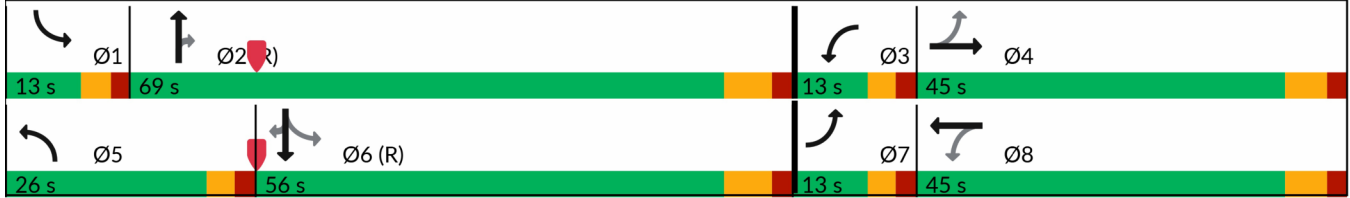

Timings
 2: U.S. Highway 24 & E Woodmen Road

Total Traffic Conditions
 AM Peak Traffic Hour - Year 2028



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	209	127	196	265	469	367
Future Volume (vph)	209	127	196	265	469	367
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		138				399
Lane Group Flow (vph)	227	138	213	288	510	399
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	39.0		31.0	101.0	70.0	
Total Split (%)	27.9%		22.1%	72.1%	50.0%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	14.6	140.0	14.0	113.4	94.4	140.0
Actuated g/C Ratio	0.10	1.00	0.10	0.81	0.67	1.00
v/c Ratio	0.63	0.09	0.62	0.10	0.21	0.25
Control Delay (s/veh)	68.0	0.1	59.5	7.0	9.5	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	68.0	0.1	59.5	7.0	9.5	0.4
LOS	E	A	E	A	A	A
Approach Delay (s/veh)	42.4			29.3	5.5	
Approach LOS	D			C	A	
Queue Length 50th (ft)	105	0	100	62	87	0
Queue Length 95th (ft)	146	0	140	92	134	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	833	1583	637	2866	2386	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.27	0.09	0.33	0.10	0.21	0.25

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 95 (68%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 55
 Control Type: Actuated-Coordinated

Timings
2: U.S. Highway 24 & E Woodmen Road

Total Traffic Conditions
AM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.63

Intersection Signal Delay (s/veh): 19.8

Intersection LOS: B

Intersection Capacity Utilization 46.6%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Intersection						
Int Delay, s/veh	1.5					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↑↑	↗	↘	↑↑
Traffic Vol, veh/h	43	60	428	15	19	577
Future Vol, veh/h	43	60	428	15	19	577
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	600	600	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	47	65	465	16	21	627

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	820	233	0	0	482	0
Stage 1	465	-	-	-	-	-
Stage 2	355	-	-	-	-	-
Critical Hdwy	6.84	6.94	-	-	4.14	-
Critical Hdwy Stg 1	5.84	-	-	-	-	-
Critical Hdwy Stg 2	5.84	-	-	-	-	-
Follow-up Hdwy	3.52	3.32	-	-	2.22	-
Pot Cap-1 Maneuver	313	769	-	-	1077	-
Stage 1	598	-	-	-	-	-
Stage 2	681	-	-	-	-	-
Platoon blocked, %			-	-		-
Mov Cap-1 Maneuver	307	769	-	-	1077	-
Mov Cap-2 Maneuver	307	-	-	-	-	-
Stage 1	598	-	-	-	-	-
Stage 2	668	-	-	-	-	-

Approach	WB	NB	SB
HCM Ctrl Dly, s/v	14.97	0	0.27
HCM LOS	B		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	472	1077
HCM Lane V/C Ratio	-	-	0.237	0.019
HCM Ctrl Dly (s/v)	-	-	15	8.4
HCM Lane LOS	-	-	B	A
HCM 95th %tile Q(veh)	-	-	0.9	0.1

Timings

1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
PM Peak Traffic Hour - Year 2028

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	36	322	324	35	443	69	613	778	35	63	464	2
Future Volume (vph)	36	322	324	35	443	69	613	778	35	63	464	2
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.201			0.358			0.950			0.334		
Satd. Flow (perm)	374	3539	1583	667	3539	1583	3433	3539	1583	622	3539	1583
Satd. Flow (RTOR)			352			187			94			132
Lane Group Flow (vph)	39	350	352	38	482	75	666	846	38	68	504	2
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		5.0	25.0	25.0	5.0	25.0	25.0
Minimum Split (s)	11.0	11.0		11.0	11.0		10.0	32.0	32.0	10.0	32.0	32.0
Total Split (s)	11.0	36.0		11.0	36.0		46.0	83.0	83.0	10.0	47.0	47.0
Total Split (%)	7.9%	25.7%		7.9%	25.7%		32.9%	59.3%	59.3%	7.1%	33.6%	33.6%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	29.0	24.2	140.0	29.0	24.2	140.0	32.8	85.3	85.3	66.0	57.2	57.2
Actuated g/C Ratio	0.21	0.17	1.00	0.21	0.17	1.00	0.23	0.61	0.61	0.47	0.41	0.41
v/c Ratio	0.28	0.57	0.22	0.21	0.79	0.05	0.83	0.39	0.04	0.20	0.35	0.00
Control Delay (s/veh)	43.8	56.4	0.3	41.1	64.9	0.1	60.2	16.3	0.1	12.2	28.8	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	43.8	56.4	0.3	41.1	64.9	0.1	60.2	16.3	0.1	12.2	28.8	0.0
LOS	D	E	A	D	E	A	E	B	A	B	C	A
Approach Delay (s/veh)		29.1			55.2			34.8			26.7	
Approach LOS		C			E			C			C	
Queue Length 50th (ft)	28	158	0	27	227	0	304	221	0	20	127	0
Queue Length 95th (ft)	57	202	0	55	279	0	353	292	0	43	196	m0
Internal Link Dist (ft)		767			477			489			630	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	137	783	1583	185	783	1583	1005	2156	1001	348	1445	724
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.28	0.45	0.22	0.21	0.62	0.05	0.66	0.39	0.04	0.20	0.35	0.00

Intersection Summary

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
 PM Peak Traffic Hour - Year 2028

Maximum v/c Ratio: 0.83

Intersection Signal Delay (s/veh): 35.7

Intersection LOS: D


Intersection Capacity Utilization 73.9%

ICU Level of Service D

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road

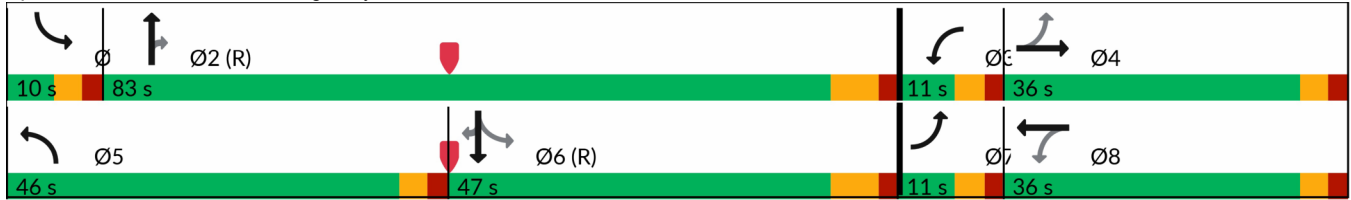



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	525	181	379	535	360	343
Future Volume (vph)	525	181	379	535	360	343
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3393	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		190				373
Lane Group Flow (vph)	571	197	412	582	391	373
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	53.0		40.0	87.0	47.0	
Total Split (%)	37.9%		28.6%	62.1%	33.6%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	29.1	140.0	22.1	98.9	71.8	140.0
Actuated g/C Ratio	0.21	1.00	0.16	0.71	0.51	1.00
v/c Ratio	0.80	0.12	0.76	0.23	0.22	0.24
Control Delay (s/veh)	61.3	0.2	67.5	7.5	20.5	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	61.3	0.2	67.5	7.5	20.5	0.3
LOS	E	A	E	A	C	A
Approach Delay (s/veh)	45.6			32.4	10.7	
Approach LOS	D			C	B	
Queue Length 50th (ft)	261	0	200	86	101	0
Queue Length 95th (ft)	309	0	260	116	161	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	1177	1583	858	2499	1813	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.49	0.12	0.48	0.23	0.22	0.24

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 6 (4%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 60
 Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.80	
Intersection Signal Delay (s/veh): 29.8	Intersection LOS: C
Intersection Capacity Utilization 60.8%	ICU Level of Service B
Analysis Period (min) 15	

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Intersection

Int Delay, s/veh 1.8

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↙		↑↑	↗	↘	↑↑
Traffic Vol, veh/h	31	38	876	51	62	479
Future Vol, veh/h	31	38	876	51	62	479
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	600	600	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	34	41	952	55	67	521

Major/Minor	Minor1	Major1	Major2
Conflicting Flow All	1347	476	0
Stage 1	952	-	-
Stage 2	395	-	-
Critical Hdwy	6.84	6.94	-
Critical Hdwy Stg 1	5.84	-	-
Critical Hdwy Stg 2	5.84	-	-
Follow-up Hdwy	3.52	3.32	-
Pot Cap-1 Maneuver	142	535	-
Stage 1	335	-	-
Stage 2	650	-	-
Platoon blocked, %			
Mov Cap-1 Maneuver	128	535	-
Mov Cap-2 Maneuver	128	-	-
Stage 1	335	-	-
Stage 2	585	-	-

Approach	WB	NB	SB
HCM Ctrl Dly, s/v	29.49	0	1.24
HCM LOS	D		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	221	683
HCM Lane V/C Ratio	-	-	0.34	0.099
HCM Ctrl Dly (s/v)	-	-	29.5	10.8
HCM Lane LOS	-	-	D	B
HCM 95th %tile Q(veh)	-	-	1.4	0.3

Timings

1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
AM Peak Traffic Hour - Year 2045

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	16	626	1102	45	448	48	301	452	50	89	850	3
Future Volume (vph)	16	626	1102	45	448	48	301	452	50	89	850	3
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.361			0.157			0.950			0.473		
Satd. Flow (perm)	672	3539	1583	292	3539	1583	3433	3539	1583	881	3539	1583
Satd. Flow (RTOR)			538			199			105			144
Lane Group Flow (vph)	17	680	1198	49	487	52	327	491	54	97	924	3
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		6.0	20.0	20.0	6.0	20.0	20.0
Minimum Split (s)	11.0	12.5		11.0	12.5		11.0	27.0	27.0	11.0	27.0	27.0
Total Split (s)	11.0	45.0		11.0	45.0		26.0	73.0	73.0	11.0	58.0	58.0
Total Split (%)	7.9%	32.1%		7.9%	32.1%		18.6%	52.1%	52.1%	7.9%	41.4%	41.4%
Yellow Time (s)	3.0	4.5		3.0	4.5		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	6.5		5.0	6.5		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	38.7	32.4	140.0	40.7	36.8	140.0	18.1	72.8	72.8	71.7	62.2	62.2
Actuated g/C Ratio	0.28	0.23	1.00	0.29	0.26	1.00	0.13	0.52	0.52	0.51	0.44	0.44
v/c Ratio	0.07	0.83	0.76	0.33	0.52	0.03	0.74	0.27	0.06	0.19	0.59	0.00
Control Delay (s/veh)	31.1	60.4	3.4	37.7	46.0	0.0	69.0	20.5	0.1	11.4	25.2	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	31.1	60.4	3.4	37.7	46.0	0.0	69.0	20.5	0.1	11.4	25.2	0.0
LOS	C	E	A	D	D	A	E	C	A	B	C	A
Approach Delay (s/veh)		24.1			41.3			37.4			23.8	
Approach LOS		C			D			D			C	
Queue Length 50th (ft)	11	315	0	31	188	0	152	137	0	23	348	0
Queue Length 95th (ft)	28	371	0	60	258	0	202	185	0	52	466	m0
Internal Link Dist (ft)		767			477			489			532	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	232	973	1583	148	1010	1583	514	1840	873	498	1573	783
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.07	0.70	0.76	0.33	0.48	0.03	0.64	0.27	0.06	0.19	0.59	0.00

Intersection Summary

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
 AM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.83	
Intersection Signal Delay (s/veh): 29.0	Intersection LOS: C
Intersection Capacity Utilization 74.0%	ICU Level of Service D
Analysis Period (min) 15	

















m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
 2: U.S. Highway 24 & E Woodmen Road

Total Traffic Conditions
 AM Peak Traffic Hour - Year 2045

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	 		 	 	 	
Traffic Volume (vph)	293	199	255	367	657	515
Future Volume (vph)	293	199	255	367	657	515
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		216				560
Lane Group Flow (vph)	318	216	277	399	714	560
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	38.0		31.0	102.0	71.0	
Total Split (%)	27.1%		22.1%	72.9%	50.7%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	18.3	140.0	16.6	109.7	88.1	140.0
Actuated g/C Ratio	0.13	1.00	0.12	0.78	0.63	1.00
v/c Ratio	0.71	0.14	0.68	0.14	0.32	0.35
Control Delay (s/veh)	67.0	0.2	55.5	7.1	13.3	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	67.0	0.2	55.5	7.1	13.3	0.6
LOS	E	A	E	A	B	A
Approach Delay (s/veh)	40.0			26.9	7.7	
Approach LOS	D			C	A	
Queue Length 50th (ft)	147	0	128	99	152	0
Queue Length 95th (ft)	193	0	173	141	225	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	809	1583	637	2773	2228	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.39	0.14	0.43	0.14	0.32	0.35

Intersection Summary

Cycle Length: 140
 Actuated Cycle Length: 140
 Offset: 95 (68%), Referenced to phase 2:NBT and 6:SBT, Start of Green
 Natural Cycle: 55
 Control Type: Actuated-Coordinated

Timings
 2: U.S. Highway 24 & E Woodmen Road

Total Traffic Conditions
 AM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.71	
Intersection Signal Delay (s/veh): 19.9	Intersection LOS: B
Intersection Capacity Utilization 50.6%	ICU Level of Service A
Analysis Period (min) 15	

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Intersection

Int Delay, s/veh 1.7

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↘		↑↑	↗	↘	↑↑
Traffic Vol, veh/h	49	60	562	15	19	837
Future Vol, veh/h	49	60	562	15	19	837
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	600	600	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	53	65	611	16	21	910

Major/Minor	Minor1	Major1	Major2
Conflicting Flow All	1107	305	0
Stage 1	611	-	-
Stage 2	496	-	-
Critical Hdwy	6.84	6.94	-
Critical Hdwy Stg 1	5.84	-	-
Critical Hdwy Stg 2	5.84	-	-
Follow-up Hdwy	3.52	3.32	-
Pot Cap-1 Maneuver	204	691	-
Stage 1	504	-	-
Stage 2	577	-	-
Platoon blocked, %		-	-
Mov Cap-1 Maneuver	200	691	-
Mov Cap-2 Maneuver	200	-	-
Stage 1	504	-	-
Stage 2	565	-	-

Approach	WB	NB	SB
HCM Ctrl Dly, s/v	22.03	0	0.2
HCM LOS	C		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	328	951
HCM Lane V/C Ratio	-	-	0.361	0.022
HCM Ctrl Dly (s/v)	-	-	22	8.9
HCM Lane LOS	-	-	C	A
HCM 95th %tile Q(veh)	-	-	1.6	0.1

Timings

1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
PM Peak Traffic Hour - Year 2045

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	49	453	456	50	622	96	860	1075	44	164	640	3
Future Volume (vph)	49	453	456	50	622	96	860	1075	44	164	640	3
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	3433	3539	1583	1770	3539	1583
Flt Permitted	0.131			0.266			0.950			0.242		
Satd. Flow (perm)	244	3539	1583	495	3539	1583	3433	3539	1583	451	3539	1583
Satd. Flow (RTOR)			496			187			94			132
Lane Group Flow (vph)	53	492	496	54	676	104	935	1168	48	178	696	3
Turn Type	pm+pt	NA	Free	pm+pt	NA	Free	Prot	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4		Free	8		Free			2	6		6
Detector Phase	7	4		3	8		5	2	2	1	6	6
Switch Phase												
Minimum Initial (s)	6.0	6.0		6.0	6.0		5.0	25.0	25.0	5.0	25.0	25.0
Minimum Split (s)	11.0	11.0		11.0	11.0		10.0	32.0	32.0	10.0	32.0	32.0
Total Split (s)	11.0	38.0		11.0	38.0		50.0	72.0	72.0	19.0	41.0	41.0
Total Split (%)	7.9%	27.1%		7.9%	27.1%		35.7%	51.4%	51.4%	13.6%	29.3%	29.3%
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	7.0	7.0	5.0	7.0	7.0
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None		None	None		None	C-Max	C-Max	None	C-Max	C-Max
Act Effct Green (s)	35.4	30.6	140.0	35.4	30.6	140.0	42.3	72.4	72.4	54.4	41.2	41.2
Actuated g/C Ratio	0.25	0.22	1.00	0.25	0.22	1.00	0.30	0.52	0.52	0.39	0.29	0.29
v/c Ratio	0.42	0.64	0.31	0.30	0.87	0.07	0.90	0.64	0.06	0.64	0.67	0.01
Control Delay (s/veh)	45.0	53.4	0.5	39.4	65.7	0.1	59.1	27.9	0.1	39.1	64.4	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	45.0	53.4	0.5	39.4	65.7	0.1	59.1	27.9	0.1	39.1	64.4	0.0
LOS	D	D	A	D	E	A	E	C	A	D	E	A
Approach Delay (s/veh)		27.8			55.8			40.8			59.0	
Approach LOS		C			E			D			E	
Queue Length 50th (ft)	35	215	0	36	314	0	420	427	0	111	297	0
Queue Length 95th (ft)	69	275	0	70	390	0	503	531	1	194	416	m0
Internal Link Dist (ft)		767			477			489			630	
Turn Bay Length (ft)	210		610	825		715	230		270	295		190
Base Capacity (vph)	127	834	1583	180	834	1583	1103	1830	864	315	1041	559
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.42	0.59	0.31	0.30	0.81	0.07	0.85	0.64	0.06	0.57	0.67	0.01

Intersection Summary

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 4 (3%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Timings
 1: U.S. Highway 24 & Meridian Road

Total Traffic Conditions
 PM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.90

Intersection Signal Delay (s/veh): 43.9

Intersection LOS: D


Intersection Capacity Utilization 85.9%

ICU Level of Service E

Analysis Period (min) 15





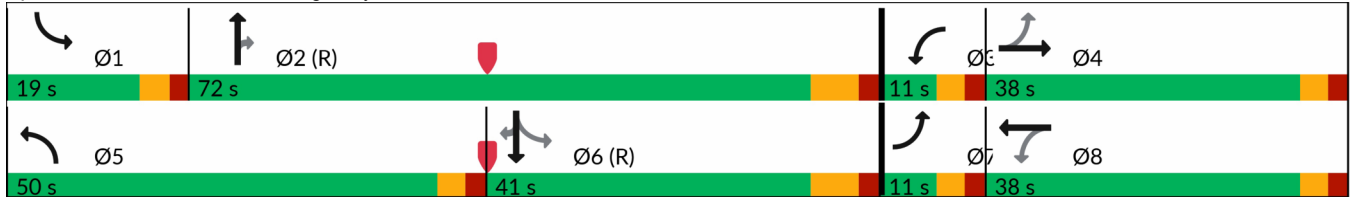







m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: U.S. Highway 24 & Meridian Road



Timings
2: U.S. Highway 24 & E Woodmen Road

Total Traffic Conditions
PM Peak Traffic Hour - Year 2045

						
Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	737	207	520	363	502	482
Future Volume (vph)	737	207	520	363	502	482
Satd. Flow (prot)	3433	1583	3433	3539	3539	1583
Flt Permitted	0.950		0.950			
Satd. Flow (perm)	3433	1583	3433	3539	3539	1583
Satd. Flow (RTOR)		154				524
Lane Group Flow (vph)	801	225	565	395	546	524
Turn Type	Prot	Free	Prot	NA	NA	Free
Protected Phases	4		5	2	6	
Permitted Phases		Free				Free
Detector Phase	4		5	2	6	
Switch Phase						
Minimum Initial (s)	6.0		6.0	25.0	25.0	
Minimum Split (s)	11.0		11.0	32.0	32.0	
Total Split (s)	56.0		41.0	84.0	43.0	
Total Split (%)	40.0%		29.3%	60.0%	30.7%	
Yellow Time (s)	3.0		3.0	5.0	5.0	
All-Red Time (s)	2.0		2.0	2.0	2.0	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	5.0		5.0	7.0	7.0	
Lead/Lag			Lead		Lag	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		None	C-Max	C-Max	
Act Effct Green (s)	39.2	140.0	28.4	88.8	55.3	140.0
Actuated g/C Ratio	0.28	1.00	0.20	0.63	0.40	1.00
v/c Ratio	0.83	0.14	0.81	0.18	0.39	0.33
Control Delay (s/veh)	55.2	0.2	69.6	17.0	33.3	0.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	55.2	0.2	69.6	17.0	33.3	0.6
LOS	E	A	E	B	C	A
Approach Delay (s/veh)	43.2			48.0	17.3	
Approach LOS	D			D	B	
Queue Length 50th (ft)	359	0	282	91	188	0
Queue Length 95th (ft)	405	0	341	151	284	0
Internal Link Dist (ft)	374			843	738	
Turn Bay Length (ft)	435		850			390
Base Capacity (vph)	1250	1583	882	2243	1398	1583
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.14	0.64	0.18	0.39	0.33
Intersection Summary						
Cycle Length: 140						
Actuated Cycle Length: 140						
Offset: 6 (4%), Referenced to phase 2:NBT and 6:SBT, Start of Green						
Natural Cycle: 75						
Control Type: Actuated-Coordinated						

Timings
2: U.S. Highway 24 & E Woodmen Road

Total Traffic Conditions
PM Peak Traffic Hour - Year 2045

Maximum v/c Ratio: 0.83

Intersection Signal Delay (s/veh): 35.6

Intersection LOS: D

Intersection Capacity Utilization 70.9%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 2: U.S. Highway 24 & E Woodmen Road



Intersection

Int Delay, s/veh 3.3

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘↙		↑↑	↗	↘	↑↑
Traffic Vol, veh/h	31	38	1231	51	62	647
Future Vol, veh/h	31	38	1231	51	62	647
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	600	600	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	34	41	1338	55	67	703

Major/Minor	Minor1	Major1	Major2
Conflicting Flow All	1824	669	0
Stage 1	1338	-	-
Stage 2	486	-	-
Critical Hdwy	6.84	6.94	-
Critical Hdwy Stg 1	5.84	-	-
Critical Hdwy Stg 2	5.84	-	-
Follow-up Hdwy	3.52	3.32	-
Pot Cap-1 Maneuver	68	400	-
Stage 1	209	-	-
Stage 2	584	-	-
Platoon blocked, %		-	-
Mov Cap-1 Maneuver	59	400	-
Mov Cap-2 Maneuver	59	-	-
Stage 1	209	-	-
Stage 2	503	-	-

Approach	WB	NB	SB
HCM Ctrl Dly, s/v	87.36	0	1.19
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBRWBLn1	SBL	SBT
Capacity (veh/h)	-	-	111	487
HCM Lane V/C Ratio	-	-	0.674	0.138
HCM Ctrl Dly (s/v)	-	-	87.4	13.6
HCM Lane LOS	-	-	F	B
HCM 95th %tile Q(veh)	-	-	3.5	0.5