


AURA AT CROSSROADS
SITE DEVELOPMENT PLAN
SITUATED IN THE SOUTHWEST 1/4 OF SECTION 8, TOWNSHIP 14 SOUTH, RANGE 65
WEST OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

- NOTES:
1. ANY PROPOSED LIGHT FIXTURES INSTALLED ON PRIVATE PROPERTY ADJACENT TO PUBLIC ROW, SHALL BE ORIENTED OR LIMITED IN LUMEN OUTPUT TO PREVENT GLARE PROBLEMS AND SHALL NOT EXCEED NATIONAL IES LIGHTING STANDARDS FOR DISABILITY GLARE.
 2. ALL FIXTURES TO BE FULL CUTOFF. REFER TO SPEC SHEETS FOR MORE INFORMATION.
 3. NO TYPE IV FORWARD THROW FIXTURES, POLE MOUNTED LIGHTS AIMED AT THE FACADE OR UNSHIELDED WALLPACKS TO BE USED.
 4. FIXTURES TO BE OPERATED DUSK TO DAWN ONLY USING A PHOTOCELL AND TIMECLOCK TO CONTROL FIXTURES. SITE FIXTURES TO HAVE DIMMING CAPABILITY TO HAVE LIGHT REDUCED BY 50% DURING POST CURFEW HOURS.
 5. SITE LIGHTING OBJECTIVES FOR ALL RESIDENTIAL BUILDING AND PARKING AREAS TO PRIORITIZE SAFETY AND SECURITY, WITH ADDITIONAL FIXTURES AT ENTRIES FOR WAYFINDING. CLUBHOUSE LIGHTING TO BE PRIMARILY FOR SAFETY AND SECURITY, WITH ADDITIONAL DOWNLIGHTS AT ENTRY COLUMNS TO ENHANCE WAYFINDING AND ARCHITECTURAL DETAILS.
 6. MITIGATION OF LIGHT ONTO ADJACENT PROPERTIES/NEIGHBORHOODS: FIXTURES TO BE MOUNTED AND ORIENTED IN A MANNER TO REDUCE GLARE, FOOTCANDLES AND LIGHT LEAK.


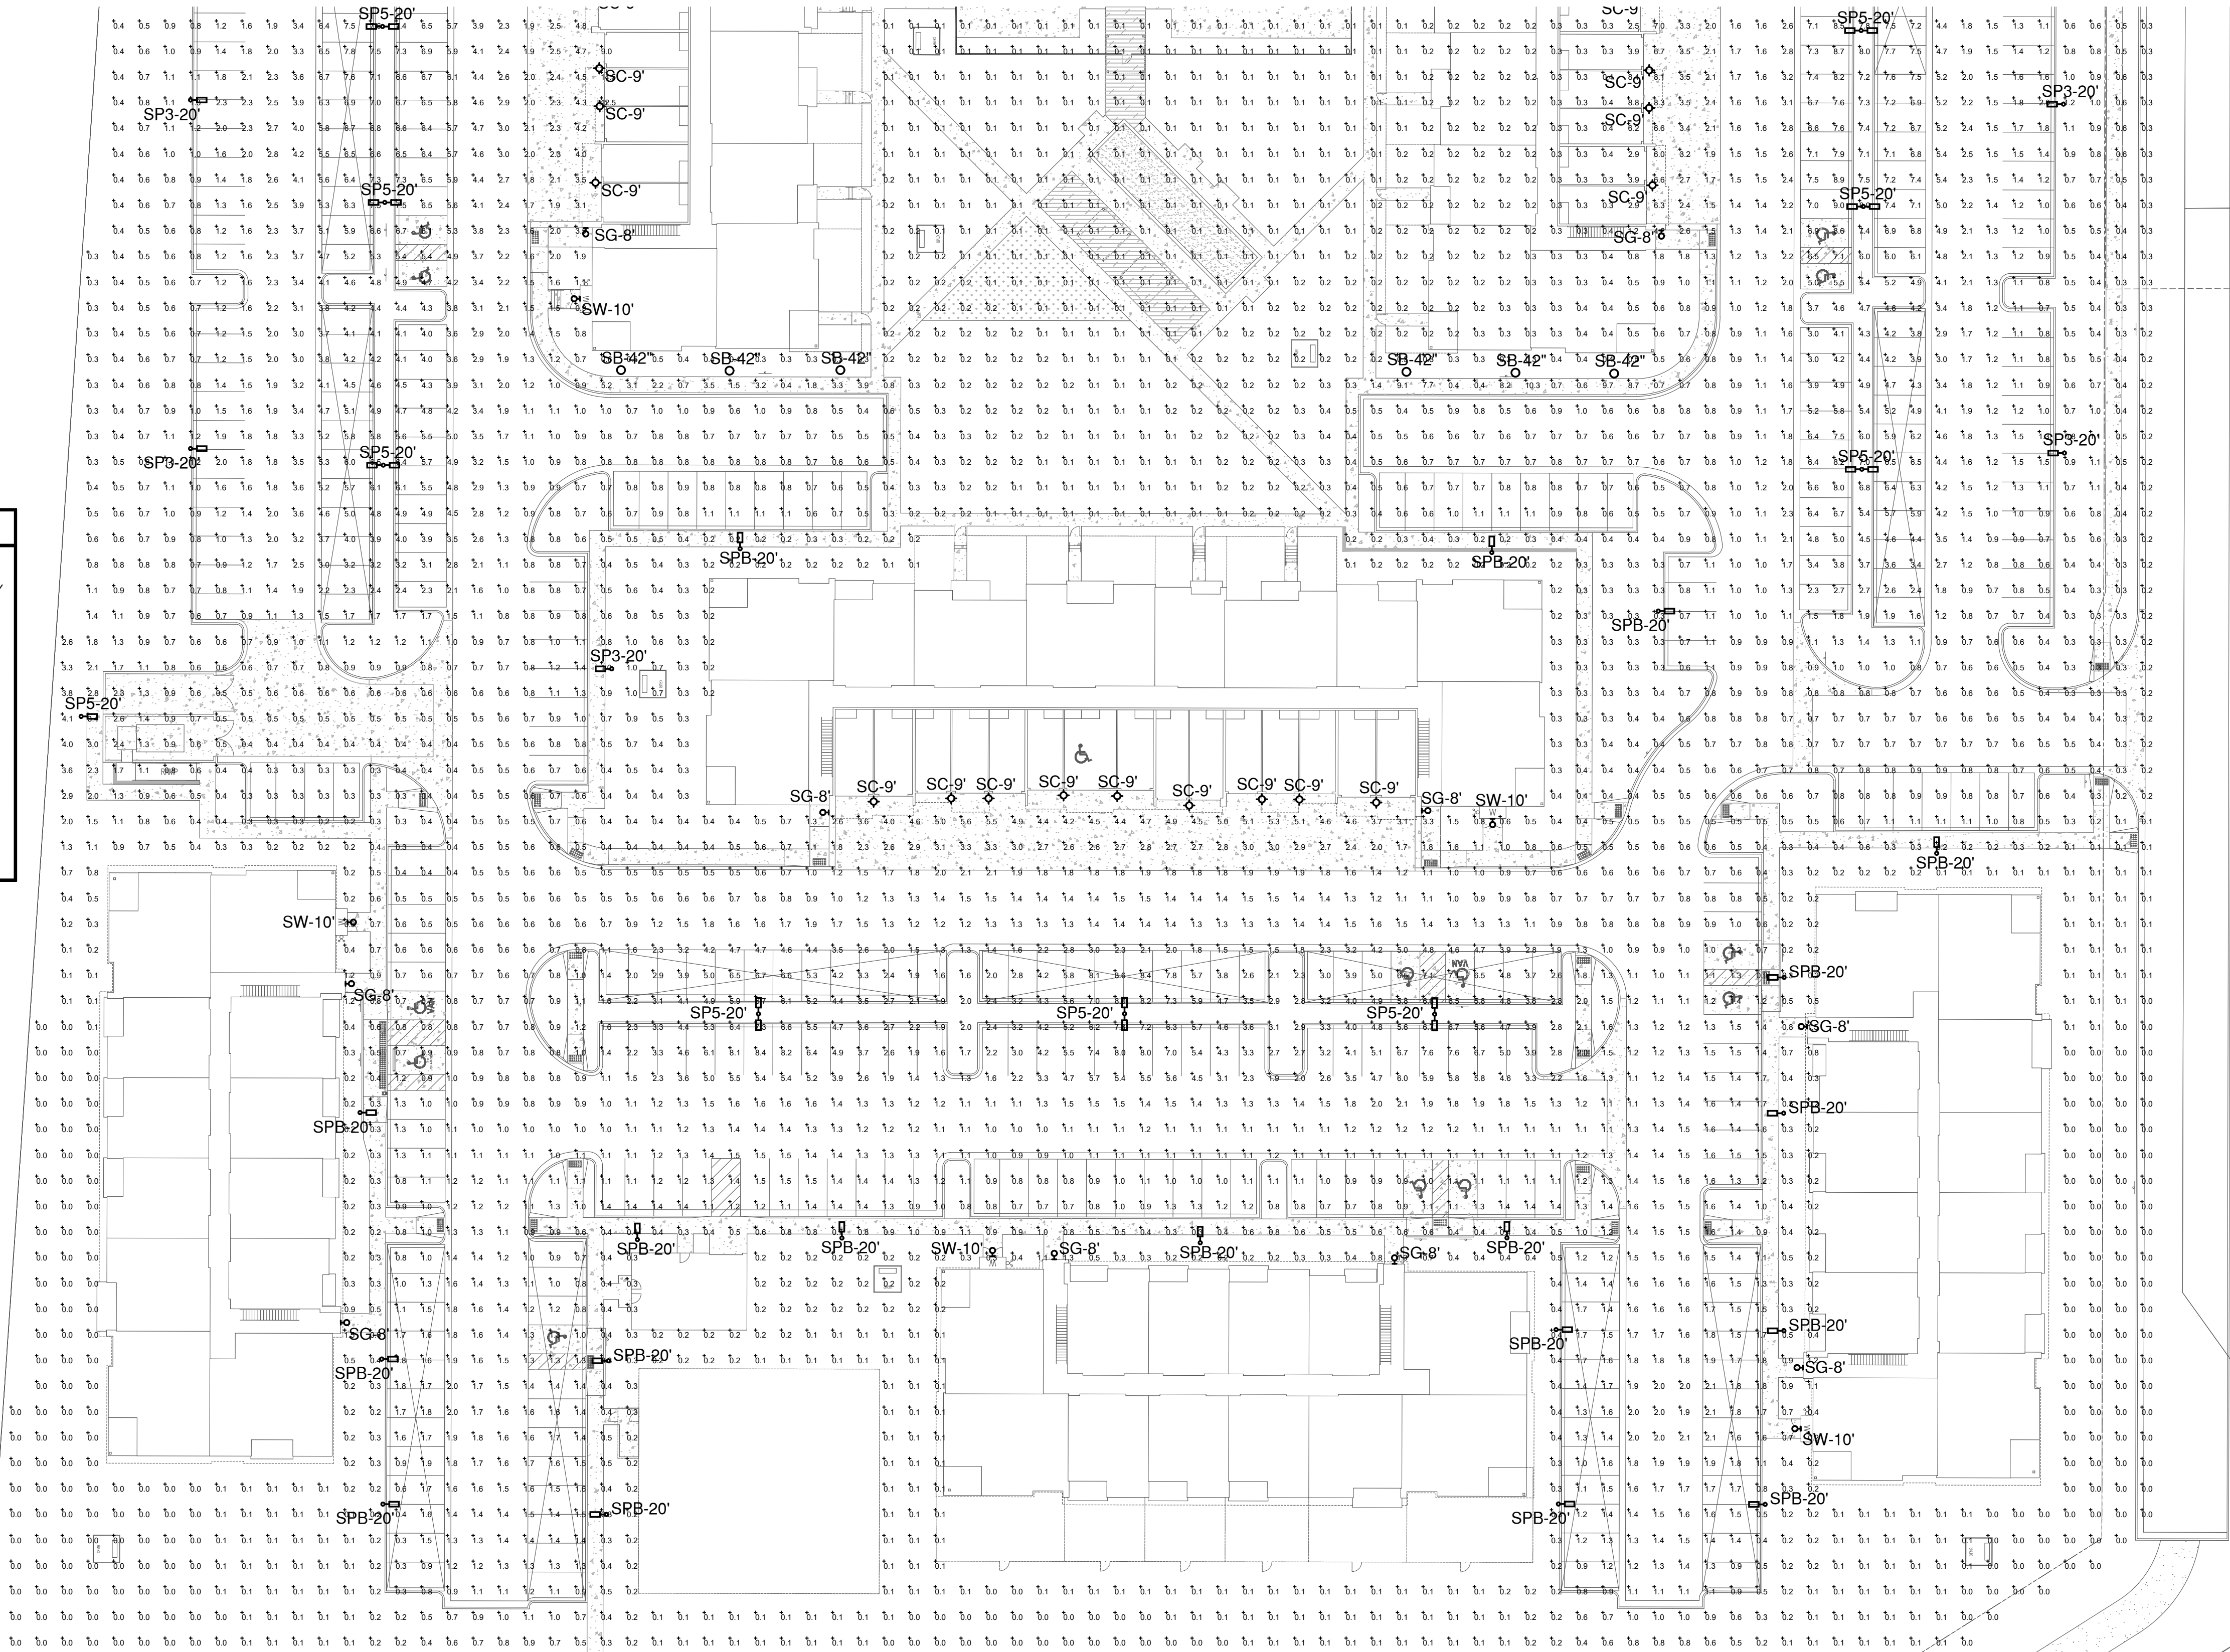


ISSUE DATE: 08-06-2021	PROJECT #: 200823
DATE	REVISION COMMENTS

HKS HARRIS KOCHER SMITH
1120 Lincoln Street, Suite 1000
Denver, Colorado 80203
P: 303.623.6300 F: 303.623.6311
HarrisKocherSmith.com

KLOK GROUP
BOX 914
GOLDEN, CO. 80402
Phone: 720-399-2410
KG@KLOKGROUP.COM

Calculation Summary					
Label	CalcType	Units	Avg	Max	Min
Site Area	Illuminance	Fc	1.45	15.0	0.0

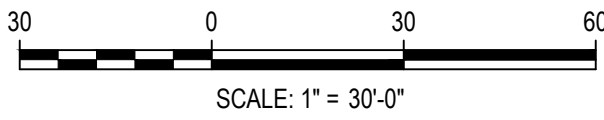

TRINIS ACQUISITION COMPANY, LLC
1801 WEWATTA STREET, FLOOR 11,
DENVER, CO 80202
P: 970.819.9968

PHOTOMETRIC PLAN
SHEET 26 OF 29


AURA AT CROSSROADS

AURA AT CROSSROADS
SITE DEVELOPMENT PLAN
SITUATED IN THE SOUTHWEST 1/4 OF SECTION 8, TOWNSHIP 14 SOUTH, RANGE 65
WEST OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

Calculation Summary					
Label	CalcType	Units	Avg	Max	Min
Site Area	Illuminance	Fc	1.45	15.0	0.0

NOTES:

1. ANY PROPOSED LIGHT FIXTURES INSTALLED ON PRIVATE PROPERTY ADJACENT TO PUBLIC ROW, SHALL BE ORIENTED OR LIMITED IN LUMEN OUTPUT TO PREVENT GLARE PROBLEMS AND SHALL NOT EXCEED NATIONAL IES LIGHTING STANDARDS FOR DISABILITY GLARE.
2. ALL FIXTURES TO BE FULL CUTOFF. REFER TO SPEC SHEETS FOR MORE INFORMATION.
3. NO TYPE IV FORWARD THROW FIXTURES, POLE MOUNTED LIGHTS AIMED AT THE FACADE OR UNSHIELDED WALLPACKS TO BE USED.
4. FIXTURES TO BE OPERATED DUSK TO DAWN ONLY USING A PHOTOCELL AND TIMECLOCK TO CONTROL FIXTURES. SITE FIXTURES TO HAVE DIMMING CAPABILITY TO HAVE LIGHT REDUCED BY 50% DURING POST CURFEW HOURS.
5. SITE LIGHTING OBJECTIVES FOR ALL RESIDENTIAL BUILDING AND PARKING AREAS TO PRIORITIZE SAFETY AND SECURITY. WITH ADDITIONAL FIXTURES AT ENTRIES FOR WAYFINDING. CLUBHOUSE LIGHTING TO BE PRIMARILY FOR SAFETY AND SECURITY, WITH ADDITIONAL DOWNLIGHTS AT ENTRY COLUMNS TO ENHANCE WAYFINDING AND ARCHITECTURAL DETAILS.
6. MITIGATION OF LIGHT ONTO ADJACENT PROPERTIES/NEIGHBORHOODS: FIXTURES TO BE MOUNTED AND ORIENTED IN A MANNER TO REDUCE GLARE, FOOTCANDLES AND LIGHT LEAK.

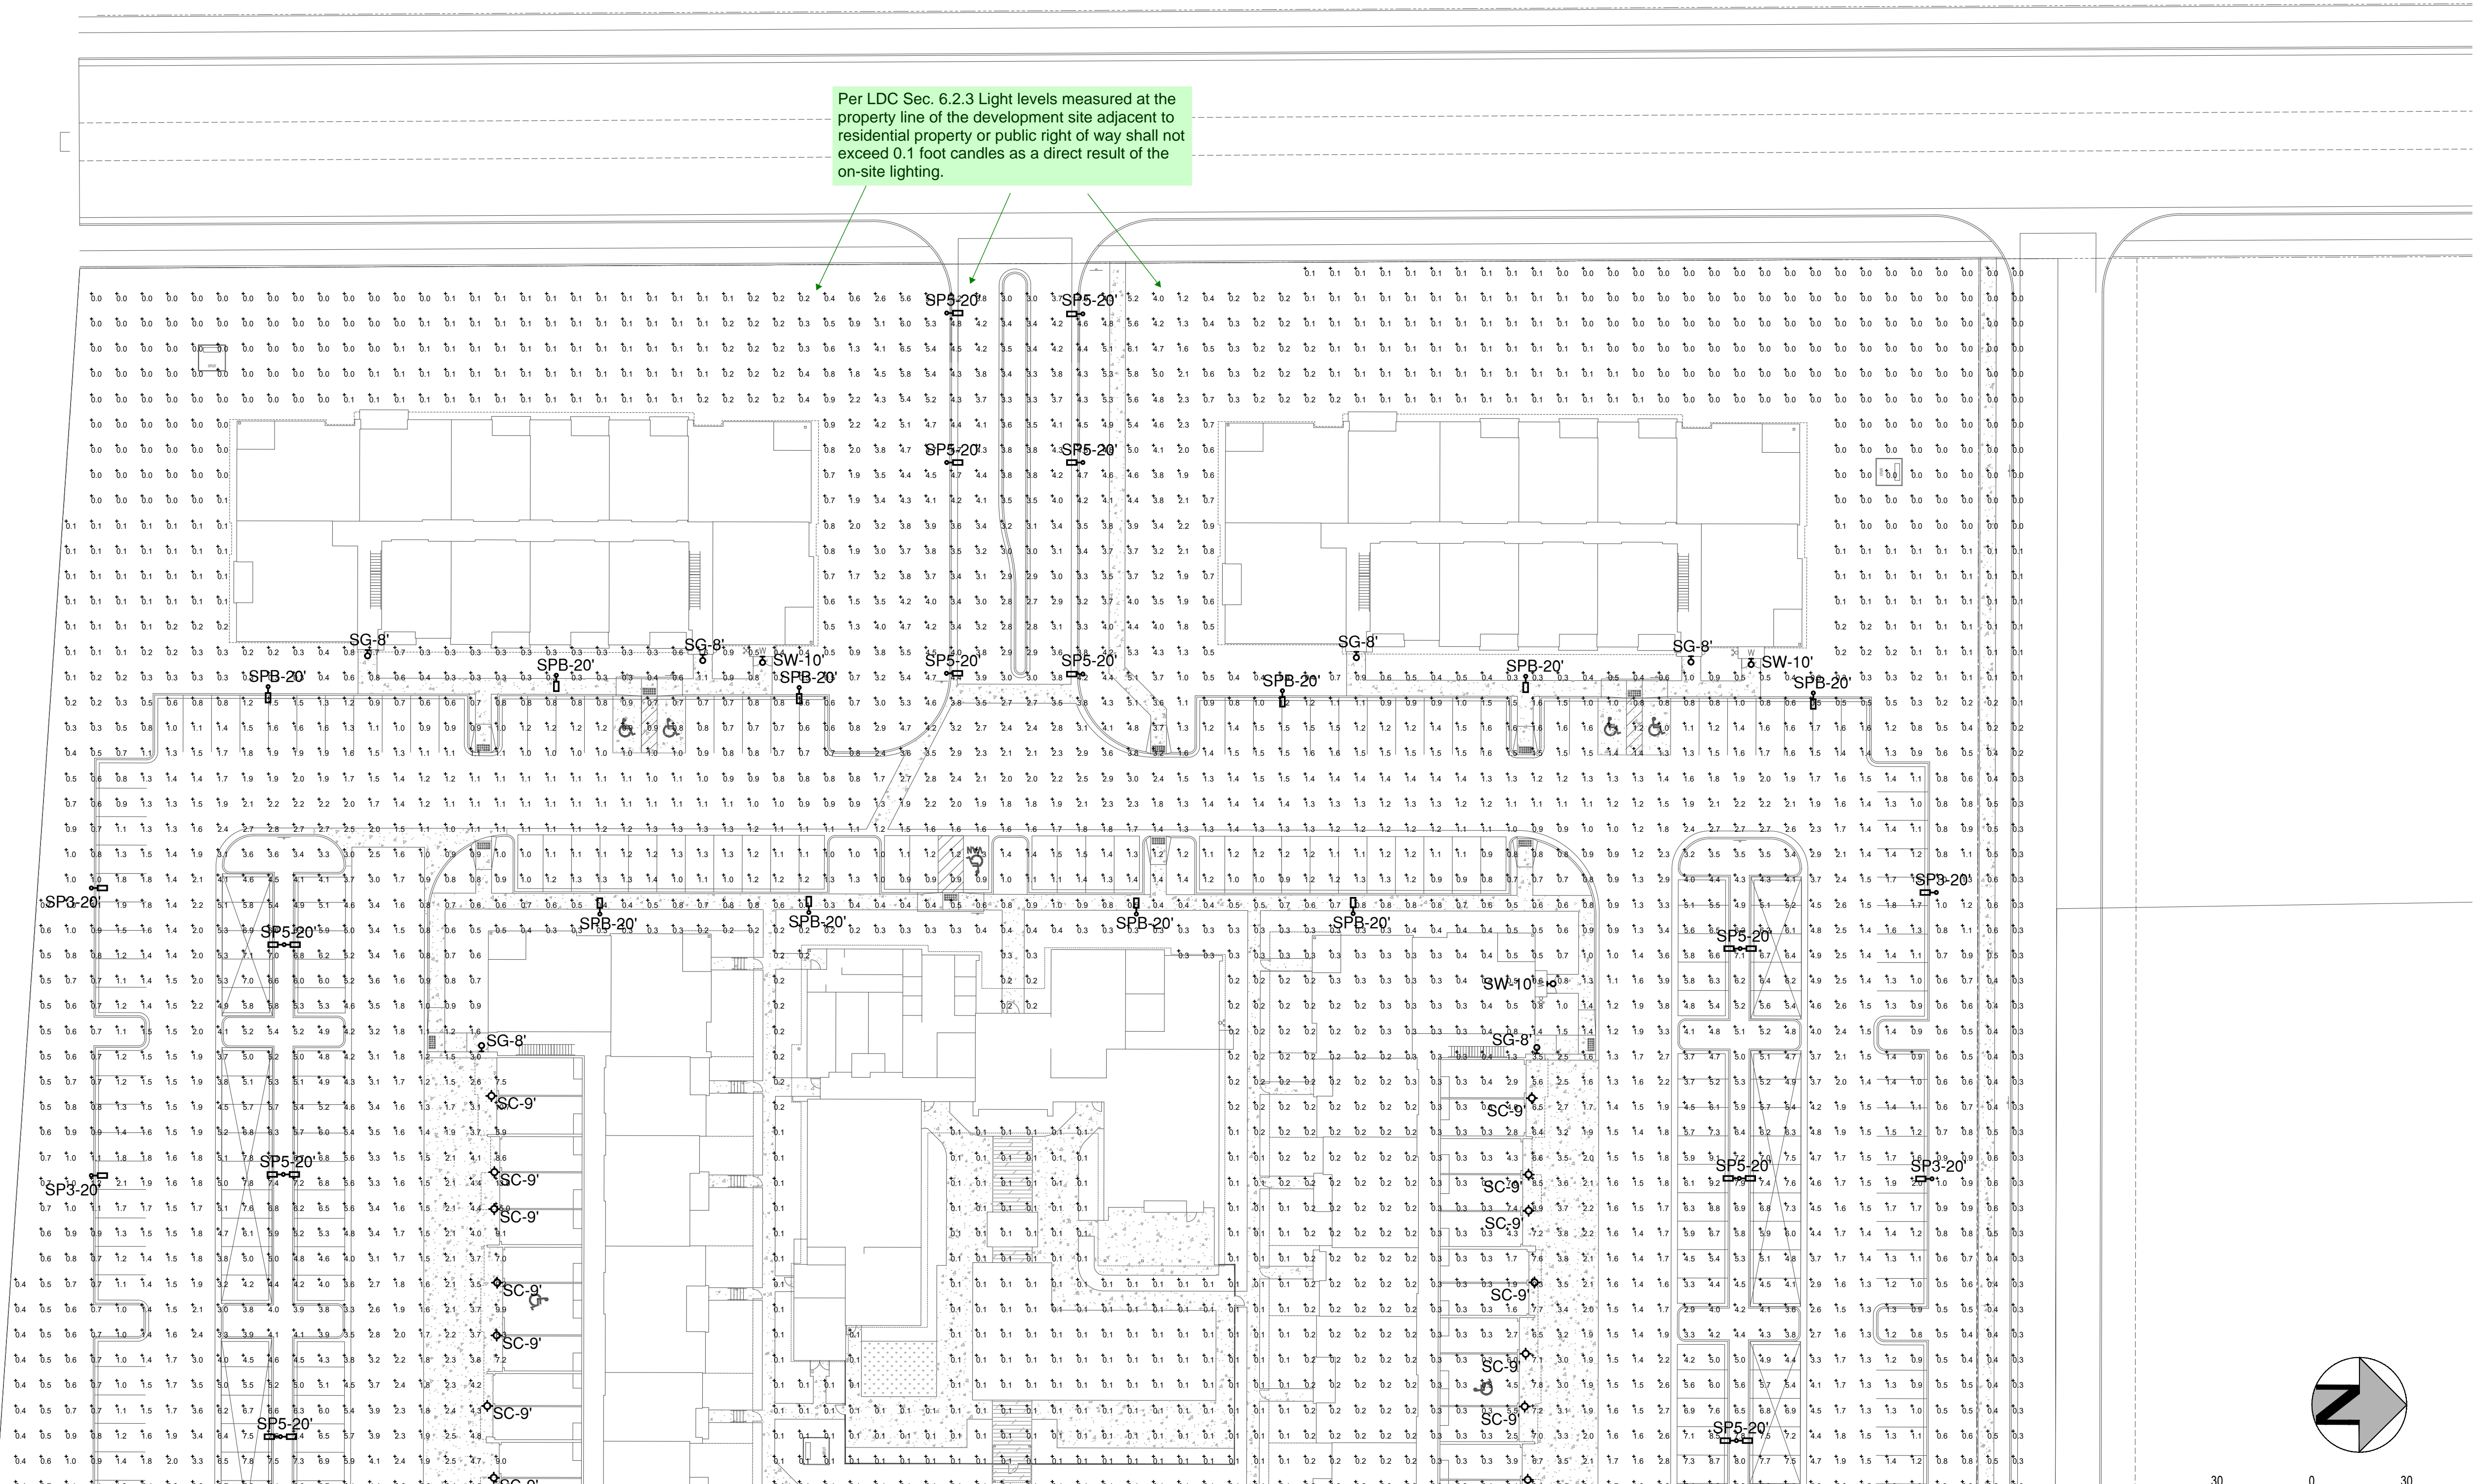

ISSUE DATE: 08-06-2021		PROJECT #	200823
DATE	REVISION	COMMENTS	

HKS HARRIS KOCHER SMITH
1120 Lincoln Street, Suite 1000
Denver, Colorado 80203
P: 303.623.6300 F: 303.623.6311
HarrisKocherSmith.com

KLOK GROUP
BOX 914
GOLDEN, CO. 80402
Phone: 720-399-2410
KG@KLOKGROUP.COM

TRINIS ACQUISITION COMPANY, LLC
1801 WEWATTA STREET, FLOOR 11,
DENVER, CO 80202
P: 970.819.9968

PHOTOMETRIC PLAN
SHEET 27 OF 29

AURA AT CROSSROADS

AURA AT CROSSROADS
SITE DEVELOPMENT PLAN
SITUATED IN THE SOUTHWEST 1/4 OF SECTION 8, TOWNSHIP 14 SOUTH, RANGE 65
WEST OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

SITE LUMINAIRE SCHEDULE

TYPE	LAMPS/KELVIN	DESCRIPTION	MOUNTING HEIGHT	LUMENS	LOAD, VA	VOLTS	MANUFACTURER/CAT. NO.	NOTES
SP3	4000K LED	SINGLE HEAD LED AREA LIGHT, TYPE 3 MEDIUM DISRIBUTION	20' POLE	6011	49	MVOLT	LITHONIA LIGHTING DSX0-LED-P2-40K-T3M-MVOLT	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL
SPB	4000K LED	SINGLE HEAD LED AREA LIGHT, BACKLIGHT CONTROL DISTRIBUTION	20' POLE	4925	49	MVOLT	LITHONIA LIGHTING DSX0-LED-P2-40K-BLG-MVOLT	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL
SP5	4000K LED	SINGLE OR DOUBLE HEAD (PER PLANS) LED AREA LIGHT, TYPE 5 WIDE DISTRIBUTION	20' POLE	16328	138	MVOLT	LITHONIA LIGHTING DSX1-LED-P5-40K-T5W-MVOLT	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL
SC	4000K LED	SURFACE MOUNTED LED PARKING FIXTURE, TYPE 5 WIDE DISTRIBUTION	9' SURFACE	3827	27	MVOLT	LITHONIA LIGHTING VCPG-LED-P1-40K-80CRI-T5W-MVOLT-SRM	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL
SW	4000K LED	WALL MOUNTED LED, TYPE 3 MEDIUM DISTRIBUTION, HOUSE SIDE SHIELD	10' WALL	4288	35	MVOLT	LITHONIA LIGHTING DSXW1-LED-20C-530-40K-T3M-MVOLT-HS	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL
SB	4000K LED	LED BOLLARD	42" ABOVE GRADE	1116	20	MVOLT	LITHONIA LIGHTING KBR8-16C-350-40K-SYM-MVOLT	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL
SG	4000K LED	SINGLE SHADE LED AREA FIXTURE WITH CLEAR GLASS, PROVIDE 18W LED LAMP.	8' ARM MOUNT	1334	18	120	TROY RLM LIGHTING NC16-LED1840-CG	FULL CUT OFF, FIXTURES TO BE CONTROLLED BY TIMECLOCK AND EXTERNAL PHOTOCELL

1. VERIFY EXACT FIXTURE'S CATALOG NUMBER, FINISH, LAMP(S), LENGTHS AND OPTIONS WITH TENANT/ARCHITECT PRIOR TO ORDERING.
2. CONTRACTOR TO VERIFY COMPATIBLE DIMMER TYPE AND MANUFACTURER FROM LUMINAIRE CUT SHEET
3. CONTRACTOR TO PROVIDE ALL PARTS AND ACCESSORIES FOR A COMPLETE, AND FUNCTIONING SYSTEM.




Specifications
8" Round
(20.3 cm)
Height:
40"
(101.6 cm)
Weight
(max):
27 lbs
(12.25 kg)

KBR8 LED
LED Specification Bollard



Buy American



Catalog Number
Notes
Type

Notes for this fixture are located at the end of the cataloged schedule.

Introduction

The KBR8 Bollard is a stylish, fully integrated LED solution for walkways. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 70% in energy savings over comparable 100W metal halide luminaires, the KBR8 Bollard is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.




VCPG LED
Parking Garage



Buy American

Specifications
Diameter: 19"
Height: 3.75"
(9.53 cm)
Weight (max, with no options): 18 lbs

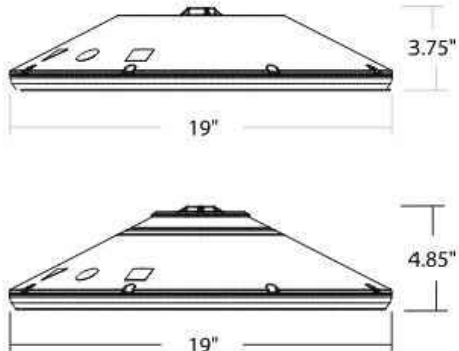

Introduction

The all new VCPG LED (Visually Comfortable Parking Garage) luminaire is designed to bring glare control, optical performance and energy savings into one package. The recessed lens design of VCPG LED minimizes high angle glare, while its precision molded acrylic lens eliminates LED pixilation and delivers the required minimums, verticals and uniformity. The dedicated up-light module option reduces the contrast between the luminaire and the ceiling creating a more visually comfortable environment.

The VCPG LED delivers up to 87% in energy savings when replacing 175W metal halide luminaires. With over 100,000 hour life expectancy (12+ years of 24/7 continuous operation), the VCPG LED luminaire provides significant maintenance savings over traditional luminaires.

• Capable options indicated by this color background.

Ordering Information

Series	LED Light Engine(s)	Package	Color temperature	Color rendering index	Distribution	Voltage	For ordering with	Mounting
VCPG LED	V4 4 Light Engines	P1 3K 3500 K P2 3K 3500 K P3 4K 4000 K P4 5K 5000 K	70CRI 80CRI	TSM TSP TSW TSE LANE	typical, medium typical, wide typical, entry line line	MVOLT 347 120 480 208 240 277 347 480	For ordering with face PM Pendant mount standard (24-inch length supply lead) SRM Surface mount (24-inch supply lead) ARM Arm mount (see R500BA accessory to mount to a wall)	Shipped included Shipped separately

Options	Shipped installed	Standard Sensors/Controls	Networked Sensors/Controls	Shipped Separately
UP1 1 Up-Light, 100 lumens	UP1 1 Up-Light, 100 lumens	PRB Motion/ambient sensor for 8-15' mounting heights	PRB3CVR2 18-24 Li-ion Li-ion motion/ambient sensor for emergency circuits for 8-15' mounting heights	DNX0D White natural aluminum
UP2 2 Up-Light, 200 lumens	UP2 2 Up-Light, 200 lumens	PRB3CVR1 Motion/ambient sensor for 8-15' mounting heights, pre-programmed to 3K and 35% light output	PRB3CVR1 Motion/ambient sensor for 8-15' mounting heights, pre-programmed to 3K and 35% light output	DNX0D Dark bronze
EW1W Emergency battery backup, Certified in CA Title 20 MCEB5 (100W, 5°C max) ^{1,2,3}	EW1W Emergency battery backup, Certified in CA Title 20 MCEB5 (100W, 5°C max) ^{1,2,3}	PRB3CVR1 Motion/ambient sensor for 8-15' mounting heights, pre-programmed to 3K and 35% light output	PRB3CVR1 Motion/ambient sensor for 8-15' mounting heights, pre-programmed to 3K and 35% light output	DNX0D Black
HA High ambient, 100°C, only P1-P4	HA High ambient, 100°C, only P1-P4	PRB3CVR2 18-24 Li-ion Li-ion motion/ambient sensor for emergency circuits for 8-15' mounting heights	PRB3CVR2 18-24 Li-ion Li-ion motion/ambient sensor for emergency circuits for 8-15' mounting heights	
DF Double face (220V, 240V, 480V)	DF Double face (220V, 240V, 480V)	Networked Sensors/Controls	Networked Sensors/Controls	
SP10KV 10KV Surge-Rack	SP10KV 10KV Surge-Rack	NLA02 PIR 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for 8-15' mounting heights	NLA02 PIR 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for 8-15' mounting heights	
LD36 36in (91) lead length	LD36 36in (91) lead length	NLA02 PIRH 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for 8-15' mounting heights	NLA02 PIRH 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for 8-15' mounting heights	
LD22 22in (56) lead length	LD22 22in (56) lead length	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	
LD108 108in (274) lead length	LD108 108in (274) lead length	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	
DWG Double face (220V, 240V, 480V)	DWG Double face (220V, 240V, 480V)	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	
Shipped Separately	Shipped Separately	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	
WC Wire Guard	WC Wire Guard	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	
BGS Back Shield	BGS Back Shield	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	
HS House Side Shield	HS House Side Shield	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	NLA02 PIRH24 18-24 Li-ion Li-ion Wireless enabled motion/ambient sensor for emergency circuits for 8-15' mounting heights	



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2013-2021 Acuity Brands Lighting, Inc. All rights reserved.

VCPG LED
Rev. 04/27/21

NOSTALGIA

Aluminum Shade
with Glass and Guard Options

Catalog #:	
Project:	Type:
Date:	Notes:

Electrical

- 120V input (277V available in arm and post option only)
- Integrated power supply allows the fixture to be connected directly into line voltage
- Pre-wired and ready for install
- LED is dimmable with Incandescent/Triac dimmers

Mounting

- 1/2" or 3/4" IP for arms. Flush mount, stems and post available only in 1/2"
- 9' Pendant cord available in black or white cord (includes 5' canopy with the same finish as the shade)

Finishes


- Shade and mounting finish options
- Available in 21 standard and 2 specialty finishes with optional coastal coating to protect finish in coastal environments (add "-C" to the finish)
- Inner shade is painted gloss white
- Consult factory for custom finish options

Optional Accessories

- Glass, Cast Guard or Wire Cage options available

Listing

UL listed to US and Canadian standards for wet locations

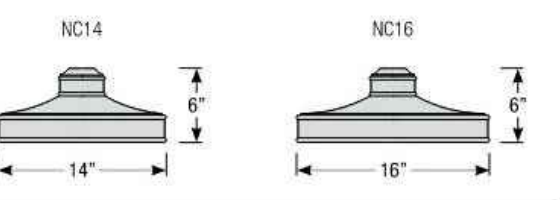

Nostalgia Order Matrix (Example: NC16MTP-FDWC-3)

Diameter	Lamp / LED	Finish	Coastal Coating Option	Accessories	Mounting Type
NC14 (14")	M (Medium Base, 100W max.)	ABL (Aegean Blue)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (2 (1/2" IP)
NC16 (16")	062413 (13W G24 / 2700K)	BB (Burnished Bronze)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (3 (1/4" IP)
	062418 (18W G24 / 2700K)	BL (Black)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (4 (1/4" IP)
	062425 (25W G24 / 2700K)	BLU (Blue)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (5 (1/4" IP)
	062432 (32W G24 / 2700K)	DWG (Dove Gray)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (6 (1/4" IP)
	062442 (42W G24 / 2700K)	FLG (Flannel Gray)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (7 (1/4" IP)
	LED1227 (12W LED / 2700K / 90 CRI / 844lm)	GA (Galvanized)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (8 (1/4" IP)
	LED1230 (12W LED / 3000K / 90 CRI / 861lm)	MB (Matte Black)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (9 (1/4" IP)
	LED1235 (12W LED / 3500K / 90 CRI / 872lm)	ML (Midnight Blue)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (10 (1/4" IP)
	LED1240 (12W LED / 4000K / 90 CRI / 889lm)	ML (Midnight Blue)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (11 (1/4" IP)
	LED1247 (12W LED / 2700K / 90 CRI / 860lm)	PNA (Painted Natural Aluminum)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (12 (1/4" IP)
	LED1830 (18W LED / 3000K / 90 CRI / 1288lm)	PNC (Painted Natural Copper)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (13 (1/4" IP)
	LED1835 (18W LED / 3500K / 90 CRI / 1311lm)	RD (Red)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (14 (1/4" IP)
	LED1840 (18W LED / 4000K / 90 CRI / 1344lm)	SA (Saturn Aluminum)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (15 (1/4" IP)
		SGR (Sage Green)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (16 (1/4" IP)
		SND (Satin Silver)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (17 (1/4" IP)
		SS (Satin Silver)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (18 (1/4" IP)
		TBZ (Textured Bronze)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (19 (1/4" IP)
		TDP (Textured Dark Purple)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (20 (1/4" IP)
		TNG (Tangerine)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (21 (1/4" IP)
		TTL (Tahitian Teal)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (22 (1/4" IP)
		WT (Gloss White)	0 (Blank) (No coating)	0 (Blank) (No accessories)	0 (23 (1/4" IP)

1. Lamps must be specified, and are not included in shade cost
2. Not for use in glass/cast guard/wire cage
3. Glass enclosure must be specified
4. Lumen are per LED value

3. Satin aluminum cannot be coated

KEY: Standard Finishes

- ABL (Aegean Blue)
- BB (Burnished Bronze)
- BK (Gloss Black)
- BLU (Blue)
- DWG (Dove Gray)
- FLG (Flannel Gray)

- LG (Lime Green)
- MB (Matte Black)
- ML (Midnight Blue)
- PNA (Painted Natural Aluminum)
- PNC (Painted Natural Copper)
- RD (Red)

- SGR (Sage Green)
- SND (Satin Silver)
- SS (Satin Silver)
- TBZ (Textured Bronze)
- TDP (Textured Dark Purple)
- TNG (Tangerine)
- TTL (Tahitian Teal)
- WT (Gloss White)

Specialty Finishes

- GA (Galvanized)
- SA (Saturn Aluminum)

See website for more details

14508 Nelson Ave, City of Industry, CA 91744 • Tel: 626.336.4511 • Fax: 626.336.4296 • www.TroyRLM.com
©2019 Troy RLM Lighting, A Division of Troy CSL Lighting, Inc.
All rights reserved. Subject to change without notice.



TYPE SB

TYPE SC

TYPE SG

ISSUE DATE: 08-06-2021	PROJECT #: 200823
DATE	REVISION COMMENTS

HKS HARRIS KOCHER SMITH
1120 Lincoln Street, Suite 1000
Denver, Colorado 80203
P: 303.623.6300 F: 303.623.6311
HarrisKocherSmith.com

KLOK GROUP
BOX 914
GOLDEN, CO. 80402
Phone: 720-399-2410
KG@KLOKGROUP.COM


TRINIS ACQUISITION COMPANY, LLC
1801 WEWATTA STREET, FLOOR 11,
DENVER, CO 80202
P: 970.819.9968

LIGHTING CUTSHEETS
SHEET 28 OF 29

AURA AT CROSSROADS

AURA AT CROSSROADS SITE DEVELOPMENT PLAN

SITUATED IN THE SOUTHWEST 1/4 OF SECTION 8, TOWNSHIP 14 SOUTH, RANGE 65
WEST OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO



D-Series Size 0 LED Area Luminaire

Specifications

EPA: 0.95 ft² (0.09 m²)



Length: 26" (66.0 cm)

Width: 13" (33.0 cm)

Height: 3" (76.2 mm)

Height H1: 7" (177.8 mm)

Weight (max): 16 lbs (7.3 kg)

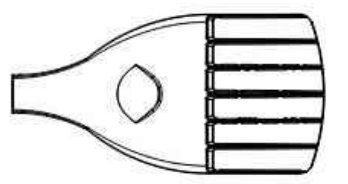


Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 400W metal halide with typical energy savings of 70% and expected service life of over 100,000 hours.

Catalog Number: _____

Notes: _____

Type: _____



D-Series Size 1 LED Area Luminaire

Specifications

EPA: 1.01 ft² (0.09 m²)


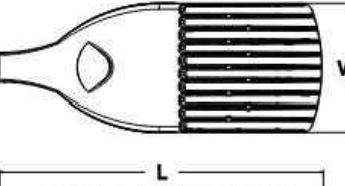
Length: 33" (83.8 cm)

Width: 13" (33.0 cm)

Height H1: 7-1/2" (190.5 mm)

Height H2: 3-1/2" (88.9 mm)

Weight (max): 27 lbs (12.3 kg)




Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Catalog Number: _____

Notes: _____

Type: _____



D-Series Size 1 LED Wall Luminaire



Specifications Luminaire

Width: 13-3/4" (34.9 cm)

Depth: 10" (25.4 cm)

Height: 6-3/8" (16.2 cm)

Weight: 12 lbs (5.4 kg)



Back Box (BBW, ELCW)

Width: 13-3/4" (34.9 cm)

Depth: 4" (10.2 cm)

Height: 6-3/8" (16.2 cm)

BBW Weight: 5 lbs (2.3 kg)

ELCW Weight: 10 lbs (4.5 kg)

For 3/4" NPT side-entry conduit (BBW only)

Catalog Number: _____

Notes: _____

Type: _____

Ordering Information				EXAMPLE: DSK0 LED P6 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD						
DSK0 LED		Series	LEDs	Color temperature	Distribution		Voltage	Mounting		
DSK0 LED	Forward optics			30K	3000 K	T15	Type I short (Automotive)	T55	Type V short ¹	Shipped included SPA Square pole mounting RPA Round pole mounting WBA Wall bracket SPUMBA Square pole universal mounting adaptor ¹ RPUMBA Round pole universal mounting adaptor ¹ Shipped separately KMA8 DDBXD U Mount arm mounting bracket adaptor (specify finish) ¹
	P1	P5	40K	4000 K	T25	Type II short	TSM	Type V medium ¹		
	P2	P6	50K	5000 K	T3M	Type II medium	T5W	Type V wide ¹		
	P3	P7			T55	Type II short	BLC	Backlight corner ¹		
	P4				T3M	Type II medium	BCCO	Left corner cutoff ¹		
	Rotated optics					T4M	Type IV medium	BCCO	Right corner cutoff ¹	
	P10	P12			TTTM	Forward throw medium				
	P11	P13			TSVS	Type V very short ¹				
Control options				Other options				Finish (specify)		
Shipped installed				Shipped installed				DSK0D Dark bronze		
NLTAIR2 Night All generation 2 enabled ^{1,10}				PIRHN				DSK0D Black		
PIRHN Network, high-flow motion/ambient sensor ¹⁰				PIRHN				DSK0D Natural aluminum		
FER NEMA two-lock receptacle only (control ordered separately) ¹⁰				PIRHN				DSK0D White		
FER Five-pin receptacle only (control ordered separately) ¹⁰				PIRHN				DSK0D Textured dark bronze		
FER Seven-pin receptacle only (back exit fixture) (control ordered separately) ¹⁰				PIRHN				DSK0D Textured black		
				PIRHN				DSK0D Textured natural aluminum		
DMG 0-10V dimming extend out back of housing for external control (control ordered separately) ¹⁰				FAO				DSK0D Textured white		

Ordering Information				EXAMPLE: DSK1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD						
DSK1 LED										
Series	LEDs	Color temperature	Distribution	Voltage	Mounting					
DSK1 LED	Forward optics		30K	3000 K	T15	Type I short (Automotive)	TSVS	Type V very short ¹	Shipped included SPA Square pole mounting ¹ RPA Round pole mounting ¹ WBA Wall bracket ¹ SPUMBA Square pole universal mounting adaptor ¹ RPUMBA Round pole universal mounting adaptor ¹ Shipped separately KMA8 DDBXD U Mount arm mounting bracket adaptor (specify finish) ¹	
	P1	P4	P7	40K	4000 K	T25	Type II short	TSM		Type V medium ¹
	P2	P5	P8	50K	5000 K	T3M	Type II medium	T5W		Type V wide ¹
	P3	P6	P9			T55	Type II short	BLC		Backlight corner ¹
	Rotated optics				T3M	Type II medium	BCCO	Left corner cutoff ¹		
	P10	P12			T4M	Type IV medium	BCCO	Right corner cutoff ¹		
	P11	P13			TTTM	Forward throw medium				
Control options				Other options				Finish (specify)		
Shipped installed				Shipped installed				DDBXD		Dark bronze
NLTAIR2	Night All generation 2 enabled ^{1,10}			PIR	High-flow, motion/ambient sensor, 15-30 mounting height, ambient sensor enabled at 10, 15, 20 ¹⁰			HS		House side shield ¹
PIRHN	Network, high-flow motion/ambient sensor ¹⁰			PIRHN	High-flow, motion/ambient sensor, 15-30 mounting height, ambient sensor enabled at 10, 15, 20 ¹⁰			DF		Double face (208, 240, 480V) ^{1,10}
FER	NEMA two-lock receptacle only (control ordered separately) ¹⁰			PIRHN	High-flow, motion/ambient sensor, 15-30 mounting height, ambient sensor enabled at 10, 15, 20 ¹⁰			LBO		Left rotated optics ¹
FER	Five-pin receptacle only (control ordered separately) ¹⁰			PIRHN	High-flow, motion/ambient sensor, 15-30 mounting height, ambient sensor enabled at 10, 15, 20 ¹⁰			RBO		Right rotated optics ¹
FER	Seven-pin receptacle only (control ordered separately) ¹⁰			PIRHN	High-flow, motion/ambient sensor, 15-30 mounting height, ambient sensor enabled at 10, 15, 20 ¹⁰			HA		50°C ambient operation ¹
DMG	0-10V dimming extend out back of housing for use with an external control (control ordered separately) ¹⁰			FAO	Field adjustable ambient sensor, 15-30 mounting height, ambient sensor enabled at 10, 15, 20 ¹⁰			DOL		Diffused drop lens ¹
DS	Dual switching (DSK1 LED only)							BES		Best practices ¹
								EGS	External glass shield	

TYPE SP3, SPB

TYPE SP5

TYPE SW

ISSUE DATE: 08-06-2021		PROJECT #: 200823
DATE	REVISION	COMMENTS

HKS HARRIS KOCHER SMITH
1120 Lincoln Street, Suite 1000
Denver, Colorado 80203
P: 303.623.6300 F: 303.623.6311
HarrisKocherSmith.com

KLOK GROUP
BOX 914
GOLDEN, CO. 80402
Phone: 720-399-2410
KG@KLOKGROUP.COM

TRINIS ACQUISITION COMPANY, LLC
1801 WEWATTA STREET, FLOOR 11,
DENVER, CO 80202
P: 970.819.9968

LIGHTING CUTSHEETS
SHEET 29 OF 29

AURA AT CROSSROADS