

# FINAL DRAINAGE REPORT FOR RETREAT AT TIMBERRIDGE FILING NO. 2

Prepared for:

TIMBERRIDGE DEVELOPMENT GROUP, LLC

2138 FLYING HORSE CLUB DRIVE COLORADO SPRINGS CO 80921 (719) 592-9333

Prepared by:

**CLASSIC CONSULTING** 

619 N. CASCADE AVE SUITE 200 COLORADO SPRINGS CO 80903 (719) 785-0790

Job No. 1185.20

PCD Project No. SF-21-021



# FINAL DRAINAGE REPORT FOR RETREAT AT TIMBERRIDGE FILING NO. 2

#### **ENGINEER'S STATEMENT:**

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the applicable master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors, or omissions on my part in preparing this report.

Marc A. Whorton Colorado P.E. #37155

Date

# **OWNER'S/DEVELOPER'S STATEMENT:**

I, the owner/developer, have read and will comply with all of the requirements specified in this drainage report and plan.

| Business Name: | TIMBERRIDGE DEVELOPMENT GROUP, LLC |  |  |
|----------------|------------------------------------|--|--|
| By:            | A VE                               |  |  |
| Title:         | Mce Passdent                       |  |  |
| Address:       | 2138 Flying Horse Club Drive       |  |  |
|                | Colorado Springs, CO 80921         |  |  |

# **EL PASO COUNTY:**

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 and 2, El Paso County Engineering Criteria Manual and Land Development Code as amended.

For County Engineer, / ECM Administrator

For County Engineer, / ECM Administrator

09/21/2022 2:12:03 PM

dsdnijkamp

Conditions:

EPC Planning & Community
Development Department



# FINAL DRAINAGE REPORT FOR RETREAT AT TIMBERRIDGE FILING NO. 2

# **TABLE OF CONTENTS:**

| PURPOSE                         | Page | 4  |
|---------------------------------|------|----|
| GENERAL DESCRIPTION             | Page | 4  |
| EXISTING DRAINAGE CONDITIONS    | Page | 4  |
| PROPOSED DRAINAGE CONDITIONS    | Page | 7  |
| DETENTION/SWQ FACILITIES        | Page | 17 |
| SAND CREEK CHANNEL IMPROVEMENTS | Page | 17 |
| DRAINAGE CRITERIA               | Page | 23 |
| FLOODPLAIN STATEMENT            | Page | 26 |
| DRAINAGE AND BRIDGE FEES        | Page | 26 |
| SUMMARY                         | Page | 30 |
| REFERENCES                      | Page | 31 |

# **APPENDICES**

**VICINITY MAP** 

SOILS MAP (WEB SOIL SURVEY)

F.E.M.A. MAP / LOMR (08-08-0541P)

RECOMMENDATIONS PER SAND CREEK DBPS

HYDROLOGIC / HYDRAULIC CALCULATIONS

STORMWATER QUALITY / DETENTION POND CALCULATIONS

**HEC-RAS CALCULATIONS** 

SECTION 404 PERMITTING / WETLAND IMPACT MAP (CORE Consultants)

**DRAINAGE MAPS** 



# FINAL DRAINAGE REPORT FOR RETREAT AT TIMBERRIDGE FILING NO. 2

#### **PURPOSE**

The purpose of this Final Drainage Report is to address on-site and off-site drainage patterns and identify specific drainage improvements and facilities required to minimize impacts to the adjacent properties.

#### **GENERAL DESCRIPTION**

The Retreat at TimberRidge Filing No. 2 is 75.829-acre site located in portions sections 27 and 28, township 12 south, range 65 west of the sixth principal meridian. The site is bounded on the north by future development phases within the TimberRidge property, to the south, east and west by Sterling Ranch property (zoned for future urban development), TimberRidge Filing No. 1 and Vollmer Road. The site is in the upper portion of the Sand Creek Drainage Basin. Both large lot rural single family residential and urban single family residential are proposed in this Filing.

The average soil condition reflects Hydrologic Group "B" (Pring coarse sandy loam and Kettle gravelly loamy sand) as determined by the "Web Soil Survey of El Paso County Area," prepared by the Natural Resources Conservation Service (see map in Appendix).

# **EXISTING DRAINAGE CONDITIONS**

The Retreat at TimberRidge Filing No. 2 property is located in the upper portion of the Sand Creek drainage basin on the south edge of Black Forest. Nearly the entire site, other than the Sand Creek corridor, is mainly covered with native grasses with few or no pine trees. The Sand Creek channel bisects the site in a north-south direction. A wetlands delineation was prepared by CORE Consultants, Inc., which included the entire TimberRidge property and submitted along with Filing No. 1. (See Appendix) This document reflects some wetlands throughout the Sand Creek channel. Any effect on these wetlands within jurisdictional waters will be described later in this report along with the appropriate permitting.



Portions of this site have been previously studied in the "Sand Creek Drainage Basin Planning Study" (DBPS) prepared by Kiowa Engineering Corporation, March 1996. The portion of Sand Creek that traverses the site is defined as Reach SC-9 in the DBPS. 1000+ acres north of this property is tributary to this reach of the channel. (See Off-site Drainage Map in Appendix) According to the DBPS, this reach of Sand Creek all contained within the channel has the following flow characteristics:  $Q_{10} = 630$  cfs  $Q_{100} = 2170$  cfs. However, the 100 yr. flow recognized by FEMA in the LOMR 08-08-0541P with effective date of July 23, 2009, equals nearly  $Q_{100} = 2600$ cfs. Also, Sterling Ranch has finalized their MDDP which includes modeling of this property as well as the large acreage north up to the top of the Sand Creek Basin. The MDDP proposes developed flows within Sand Creek that are significantly lower than both the DBPS and FEMA currently show. These flows are as follows: At Arroya Lane crossing  $Q_{10}$  = 430 cfs  $Q_{100}$  = 1487 cfs and TimberRidge south property line  $Q_{10}$  = 452 cfs  $Q_{100}$  = 1523 cfs. Even with the County approval of the MDDP and these adjusted flows, a CLOMR/LOMR will be required to be prepared, submitted and approved by FEMA prior to utilizing these flows in any Final Drainage Reports within this development. Based on the anticipated 12-18-month timing of the CLOMR/LOMR process, this development will continue to utilize the much larger FEMA recognized flows for all proposed channel improvements through this property, including the culvert crossing at Poco Road. This is how Filing No. 1 was developed as well.

The majority of these off-site flows enter the property at the north end of the site conveying flows from the northwest (Black Forest area) and the off-site stock ponds to the north (both tributary to hundreds of acres of property in Black Forest). There are multiple existing culvert crossings of Vollmer Rd. just north of Arroya Lane to facilitate these historic flow patterns. The following are the few key culverts that directly feed the Sand Creek channel north of Arroya Lane: Approximately 1,000 feet north of Arroya Lane, an existing 36" CMP crosses Vollmer Road (Basin SC-1 on Off-site Drainage Map). A small basin and natural ravine just west of Vollmer feeds this facility. From a recent field visit, this small facility seems to be in good working condition, however, not labeled in the DBPS. Another 700 feet+ north along Vollmer a much larger basin exists west of the roadway. This off-site basin is approximately 350+ acres northwest of Vollmer



Road (Basin SC-2 on Off-site Drainage Map). As shown within the DBPS, this existing crossing is a 60" CMP with some very dense and tall vegetation at both the entrance and exit of this facility. But, based on a recent field visit this facility seems to be in good working condition. The DBPS depicts this facility and recommends an additional 60" CMP at this location. However, there are no signs of erosion or over topping the road at this location at this time based on the current development within the tributary area to this facility. Based on the existing surrounding topography and roadway configuration, the 100 yr. historic flows at this location would appear to spill over the roadway and continue in their historic drainage pattern downstream within the upper reach of Sand Creek.

The following descriptions represent the pre-development flow design points for the property excluding the major off-site flows within Sand Creek just described:

**EX DP-1** ( $Q_2 = 1$  cfs,  $Q_5 = 3$  cfs,  $Q_{100} = 18$  cfs) consists of small portion of the property at the SE corner that currently sheet flows in a southwesterly direction. These pre-development flows travel off-site directly onto Sterling Ranch property prior to eventually entering the Sand Creek channel.

Basin EX-2 ( $Q_2$  = 2 cfs,  $Q_5$  = 7 cfs,  $Q_{100}$  = 44 cfs) consists of approximately 50% off-site and 50% on-site property. The off-site property is part of the future Sterling Ranch development and is conveyed in a southwesterly direction directly on-site via a natural ravine. Portions of the on-site property were graded along with Filing No. 1 to allow for this area to be captured in two temporary sediment basins and away from the Filing No. 1 lot development. These two facilities will be removed along with Filing No. 2 construction.

Basin EX-3 ( $Q_2 = 1$  cfs,  $Q_5 = 2$  cfs,  $Q_{100} = 16$  cfs) consists of again both off-site and on-site property. These flows are conveyed in a southwesterly direction and captured in a graded ditch and routed towards another temporary sediment basin constructed with Filing No. 1. This facility will remain during Filing No. 2 construction as it captures undeveloped flows further north.



Basin EX-4 ( $Q_2$  = 4 cfs,  $Q_5$  = 13 cfs,  $Q_{100}$  = 90 cfs) consists of the remaining portion of the yet undeveloped TimberRidge property along with off-site future Sterling Ranch property. This entire area sheet flows in a southwesterly direction towards Sand Creek. Along with the development of Filing No. 1 and the secondary emergency access road up to Arroya Lane, several storm system were installed to convey portions of these flows under the access road. The existing on-site stock pond will continue to remain as it captures much of the off-site tributary area.

EX DP-5 ( $Q_2$  = 3 cfs,  $Q_5$  = 12 cfs,  $Q_{100}$  = 73 cfs) consists of combined flows from basins EX-5 and EX-7. Basin EX-5 ( $Q_2$  = 2 cfs  $Q_5$  = 7 cfs,  $Q_{100}$  = 50 cfs) is the northwest portion of the TimberRidge property with some spruce trees and a very defined natural ravine that conveys flows in a southeast direction towards Sand Creek. Vollmer Road is the westerly boundary of this basin. Basin EX-7 ( $Q_2$  = 2 cfs  $Q_5$  = 6 cfs,  $Q_{100}$  = 34 cfs) consists of an off-site basin west of Vollmer Road (not a part of this development) that drains under Vollmer into the TimberRidge property via an existing 48" CMP culvert. These off-site flows enter Basin EX-5 and then travel within the on-site ravine towards Sand Creek. Dual 30" RCP culverts were installed along with Filing No. 1 where the future road crosses this ravine. This condition will remain with the development of Filing 2 and these off-site flows will be accounted for in downstream design.

# PROPOSED DRAINAGE CONDITIONS

Proposed development within the Retreat at TimberRidge Filing No. 2 will consist of a variety of different residential lot sizes ranging from 1.0-2.5-acre large rural lots to 12,000 SF min. urban lots. The rural lots will have paved streets and roadside ditches while the urban lots paved streets with County standard curb, gutter and sidewalk. Development of the urban lots proposed will consist of overlot grading for the planned roadways and lots. Development of rural lots proposed within the site will be limited to roadways and building pads, conserving the natural feature areas. Individual home sites on these lots are to be left generally in their natural condition with minimal disturbance to existing conditions per individual lot construction. Per the El Paso County



ECM, Section I.7.1.B.5, rural lots of 2.5 ac. and larger are not required to provide Water Quality Capture Volume (WQCV). However, based on the current County/Urban Drainage stormwater quality standards, a WQCV component is automatically built into the UD Detention spreadsheet utilized in the detention basin design. Thus, the proposed facilities within both the rural and urban portions of this development will provide WQCV along with an Excess Urban Runoff Volume (EURV) in the lower portion of the facility storage volume with an outlet control device. Frequent and infrequent inflows are released at rates approximating undeveloped conditions. This concept provides some mitigation of increased runoff volume by releasing a portion of the increased runoff at a low rate over an extended period of time, up to 72 hours. This means that frequent storms, smaller than the 2-year event, will be reduced to very low flows near or below the sediment carrying threshold value for downstream drainage ways. Also, by incorporating an outlet structure that limits the 100-year runoff to the undeveloped condition rate, the discharge hydrograph for storms between the 2 year and the 100-year event will approximate the hydrograph for the undeveloped conditions and will help effectively mitigate the effects of development. As reasonably possible, WQCV will be provided for all new roads and urban lots. The following describes how this development proposes to handle both the off-site and on-site drainage conditions:

As mentioned previously, the majority of the off-site flows are already within the Sand Creek channel prior to entering the property. However, the few off-site basins that must travel through the proposed site development areas prior to entering Sand Creek have been accounted for.

# The following represent the basins and design points west of Sand Creek:

As mentioned previously, Basin Ex-7 ( $Q_2 = 2$  cfs  $Q_5 = 6$  cfs,  $Q_{100} = 34$  cfs) consists of the off-site basin west of Vollmer Road (not a part of this development) that drains under Vollmer into the TimberRidge property via an existing 48" CMP culvert. These flows are then combined with the flows from basins OS-1 and OS-2. Basins OS-1 ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 9$  cfs) and OS-2 ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 7$  cfs) represent off-site flows from future TimberRidge development



adjacent to Vollmer Rd. and Arroya Lane. These flows calculated as future development flows will continue to travel in a southerly direction within the existing natural ravine and enter Basin B. Basin B ( $Q_2 = 2$  cfs  $Q_5 = 4$  cfs,  $Q_{100} = 14$  cfs) consists of two rural lots and the natural ravine conveying the off-site flows from the north towards Design Point 1.

**Design Point 1** ( $Q_5$  = 12 cfs,  $Q_{100}$  = 57 cfs) represents this combined total where the existing dual 30" RCP culverts crossing Aspen Valley Rd. will convey the flows under the road and towards Design Point 3. (See Appendix for culvert and rip-rap calculations) The natural ravine within lots 4 and 5 is contained within a drainage esmt. as shown on the drainage map and final plat. Permanent rock check dams are planned through this corridor to mitigate erosion and sediment transfer potential. These improvements within the drainage esmt. will be maintained by the Retreat Metropolitan District No. 1.

**Design Point 2 (Q**<sub>5</sub> = **5 cfs, Q**<sub>100</sub> = **20 cfs)** represents developed flows from Basin A. At this location a proposed 24" RCP culvert crossing Aspen Valley Rd. will convey the flows under the road into the natural drainage area within the drainage easement on lot 7. (See Appendix for culvert and rip-rap calculations)

**Basin D** ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 6$  cfs) represents a portion of the proposed 2.5 ac. rural lots adjacent to Aspen Valley Road. Developed flows from this basin will continue to sheet flow in a southeasterly direction towards Design Point 3 and combine with the upstream flows. **Design Point 3** ( $Q_5 = 17$  cfs,  $Q_{100} = 74$  cfs) represents this combined flow total where a proposed 42" RCP will collect and convey the developed flows under Falcon Nest Court towards Pond 3. The proposed channel within lot 7 is contained within a drainage esmt. as shown on the drainage map and final plat. It will convey the developed flows from Design Points 1 and 2 towards Design Point 3 and be lined with Turf Reinforcement Matting and permanent rock check dams. These improvements within the drainage esmt. will be maintained by the Retreat Metropolitan District No. 1. (See Appendix for channel calculations)



**Basin C** ( $Q_2 = 2$  cfs  $Q_5 = 3$  cfs,  $Q_{100} = 8$  cfs) represents a portion of the proposed 2.5 ac. rural lots with developed flows that sheet flow in a southeasterly direction towards Design Point 4. At this location a proposed 24" RCP will collect and convey these flows to where they combine with the previously mentioned developed flows from Design Point 3. The ponding for this facility will be contained within a public drainage esmt. within lot 7 as shown on the Final Plat.

**Basin E1** ( $Q_2 = 2$  cfs  $Q_5 = 4$  cfs,  $Q_{100} = 15$  cfs) represents a portion of the proposed 2.5 ac. rural lots (Lots 10-12) that will continue to sheet flow in a southeasterly direction towards the natural ravine. The majority of the upstream pre-development flows will be collected by the previously described proposed 42" RCP at Design Point 3. Only the developed flows from lots 10-12 will now contribute to this area and thus, the natural ravine will remain native with no further improvements required. This natural drainage corridor will be protected and placed in a drainage esmt. across these lots as shown on the Final Plat. Given the size of these lots, minimal unconnected impervious area introduced and sizeable receiving pervious areas per lot, the WQCV reduction = 100% with 0 untreated WQCV within this basin. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix)

**Basin E2** ( $Q_2 = 0.5$  cfs  $Q_5 = 1.2$  cfs,  $Q_{100} = 6$  cfs) represents a portion of lots 9 & 10 that will continue to sheet flow in a southerly direction towards Pond 3. These flows are accounted for in the Design Point 5 and Pond 3 calculations.

**Basin F** ( $Q_2 = 1$  cfs  $Q_5 = 3$  cfs,  $Q_{100} = 19$  cfs) represents a portion of the proposed 2.5 ac. rural lots (Lots 6, 8 and 9) that will continue to sheet flow in a southeasterly direction towards Sand Creek (contained within Tract B). Given the size of these lots, minimal unconnected impervious area introduced and sizeable receiving pervious areas per lot, the WQCV reduction = 100% with 0 untreated WQCV within this basin. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix)



**Basin OS-3** ( $Q_2 = 0.1$  cfs  $Q_5 = 0.4$  cfs,  $Q_{100} = 2$  cfs) represents a small portion of the extreme rear yard of the proposed lots 11 & 12 that continues to sheet flow towards Sand Creek as originally anticipated.

**Design Point 5 (Q**<sub>5</sub> = **18 cfs, Q**<sub>100</sub> = **79 cfs)** represents the total developed flows entering the proposed **Pond 3.** A proposed full-spectrum EDB is proposed at this location to release less than the pre-development flows currently seen. The following describes the design of this facility. (See Appendix for MHFD-Detention Pond design sheets):

Detention Pond 3 (Full Spectrum EDB – see multiple storm release data below)

0.395 Ac.-ft. WQCV required

0.309 Ac.-ft. EURV required with 4:1 max. slopes

1.700 Ac.-ft. 100-yr. Storage

2.404 Ac.-ft. Total

Total Peak In-flow:  $Q_2 = 10.3 \text{ cfs}, Q_5 = 20.8 \text{ cfs}, Q_{100} = 74.7 \text{ cfs}$ 

Pond Peak Design Release:  $Q_2 = 1.0 \text{ cfs}$ ,  $Q_5 = 10.1 \text{ cfs}$ ,  $Q_{100} = 59.6 \text{ cfs}$ 

Pre-development Release:  $Q_2 = 5.6 \text{ cfs}$ ,  $Q_5 = 15.8 \text{ cfs}$ ,  $Q_{100} = 69.2 \text{ cfs}$ 

(Ownership and maintenance by the Retreat at TimberRidge Metro District 1)

At this proposed outfall location, the overall channel flows will not significantly change based on Detention Pond 3 peak release of  $Q_{100}$  = 59.6 cfs which is less than the predevelopment flows at this location of  $Q_{100}$  = 69.2 cfs. (See Appendix for culvert outlet and rip-rap calculations)

# The following represent the basins east of Sand Creek:

**Design Point 6** ( $Q_5$  = 3 cfs,  $Q_{100}$  = 8 cfs) represents developed flows from on-site Basin G ( $Q_2$  = 1.7 cfs  $Q_5$  = 2.4 cfs,  $Q_{100}$  = 5 cfs) and off-site Basin OS-9 ( $Q_2$  = 0.5 cfs  $Q_5$  = 0.9 cfs,  $Q_{100}$  = 3 cfs). These flows remain consistent with the previous Filing No. 1 report where an existing 10' Type R at-grade inlet was installed with Filing No. 1. This facility continues to intercept 100% of the 5 yr. and 79% of the 100 yr. developed flows. The flow-by that will continue down the west side



of the street into Filing No. 1 remains consistent with the previous report and equals  $Q_5 = 0$  cfs,  $Q_{100} = 1.7$  cfs. (See Appendix for calculations)

**Basins H1** ( $Q_2 = 0.6 \text{ cfs } Q_5 = 0.9 \text{ cfs}$ ,  $Q_{100} = 2 \text{ cfs}$ ), H2 ( $Q_2 = 0.6 \text{ cfs } Q_5 = 0.8 \text{ cfs}$ ,  $Q_{100} = 2 \text{ cfs}$ ) and I ( $Q_2 = 0.2 \text{ cfs } Q_5 = 0.3 \text{ cfs}$ ,  $Q_{100} = 0.8 \text{ cfs}$ ) represents the rear yards of proposed lots 13-16. As previously accounted for in the Filing No. 1 report, these rear yard developed flows will sheet flow directly off-site and into the open space tract in Filing No. 1. Given the minimal unconnected impervious area introduced and sizeable receiving pervious areas per lot, the WQCV reduction = 100% with 0 untreated WQCV within these basins. The anticipated impervious areas within these basins exceeds that allowed by the Declaration of Covenants and Restrictions as recorded for this subdivision. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix)

**Design Point 7 (Q<sub>5</sub> = 9 cfs, Q<sub>100</sub> = 39 cfs)** represents developed flows from on-site Basin J (Q<sub>2</sub> = 4 cfs  $Q_5 = 7$  cfs,  $Q_{100} = 18$  cfs), off-site Basin OS-4 ( $Q_2 = 0.2$  cfs  $Q_5 = 0.7$  cfs,  $Q_{100} = 5$  cfs) and a 70% portion of the anticipated future Sterling Ranch development within off-site Basin OS-5 ( $Q_2 = 1$ cfs  $Q_5$  = 4 cfs,  $Q_{100}$  = 26 cfs). In the interim, the pre-development off-site flows from Basin OS-5 will be captured in an off-site temporary sediment basin at the east termination point of Elk Antler Lane. This facility sizing is based on the 13.7 ac. off-site basin OS-5 and is shown on the grading and erosion control plan. Both the overflow spillway and outlet pipe will be routed into the proposed curb line of Elk Antler Lane. Appropriate temporary grading and drainage easements will be acquired from the adjacent property owner prior to construction. However, the proposed downstream storm system has been sized and accounts for these anticipated offsite basins. Upon future development within the off-site basins OS-4 and OS-5, developed release must adhere to these anticipated flows described above. Ultimately, the total developed flows will combine and travel in a southerly direction to Design Point 7 where a proposed 15' Type R sump inlet will completely intercept both the 5 yr. and 100 yr. developed flows. The emergency overflow will be 12" and then down the street to the west within Elk Antler Lane.



**Design Point 8 (Q**<sub>5</sub> = **2 cfs, Q**<sub>100</sub> = **10 cfs)** represents developed flows from on-site Basin N (Q<sub>2</sub> = 0.7 cfs Q<sub>5</sub> = 1 cfs, Q<sub>100</sub> = 2 cfs) and a 30% portion of the anticipated future Sterling Ranch development within off-site Basin OS-5 (Q<sub>2</sub> = 1 cfs Q<sub>5</sub> = 4 cfs, Q<sub>100</sub> = 26 cfs). Again, in the interim, the pre-development off-site flows from Basin OS-5 will be captured in the off-site temporary sediment basin at the east termination point of Elk Antler Lane. (See GEC Plan) The proposed downstream storm system has been sized and accounts for this anticipated off-site basin. Ultimately, the total developed flows will combine at Design Point 8 where a proposed 10' Type R sump inlet will completely intercept both the 5 yr. and 100 yr. developed flows. The emergency overflow will be 12" and then down the street to the west within Elk Antler Lane.

**Basin K** ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 5$  cfs) represents a portion of the rear yards of proposed lots 21-26. These developed flows will continue to sheet flow in a westerly direction towards a temporary sediment basin constructed with Filing No. 1. Given the minimal unconnected impervious area introduced and sizeable receiving pervious areas per lot, the WQCV reduction = 100% with 0 untreated WQCV within this basin. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix) Basin L ( $Q_2 = 0.3$  cfs  $Q_5 = 0.6$  cfs,  $Q_{100} = 2$  cfs) represents the rear yard of the proposed lot 27. These minor developed flows will continue to sheet flow in a westerly direction towards another temporary sediment basin constructed with Filing No. 1. Again, given the minimal unconnected impervious area introduced and sizeable receiving pervious area for this lot, the WQCV reduction = 100% with 0 untreated WQCV within this basin. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix) Both of these temporary sediment basins will remain in place with the construction of Filing 2 not for treatment but for sediment control. Upon the imminent construction of Filing 3, these facilities will then be removed and these basins will be formally captured and treated in the existing pond 2. Basin M ( $Q_2 = 0.9$  cfs  $Q_5 = 1.2$  cfs,  $Q_{100} = 3$  cfs) represents the developed flows from proposed lots 19-20. These developed flows were accounted for in the Filing No. 1 report and will continue to sheet flow in a southwesterly direction directly into the north side of Elk Antler Lane. The existing downstream 15' Type R At-grade Inlet, just south of the intersection of Elk Antler Lane and Antelope Ravine Dr., will continue to adequately collect these flows.



**Design Point 9 (Q**<sub>5</sub> = **4 cfs, Q**<sub>100</sub> = **14 cfs)** represents the developed flows from Basins OS-8 (Q<sub>2</sub> = 2 cfs Q<sub>5</sub> = 3 cfs, Q<sub>100</sub> = 10 cfs) and Q (Q<sub>2</sub> = 0.4 cfs Q<sub>5</sub> = 1.2 cfs, Q<sub>100</sub> = 6 cfs). At this location, an existing 10' Type R Sump Inlet was installed with Filing No. 1 to completely intercept both the 5 yr. and 100 yr. developed flows. These flows remain consistent with the Filing No. 1 report as anticipated as Q<sub>5</sub> = 5 cfs, Q<sub>100</sub> = 15 cfs.

**Design Point 10** ( $Q_5 = 3$  cfs,  $Q_{100} = 11$  cfs) represents developed flows from Basins O ( $Q_2 = 2$  cfs  $Q_5 = 3$  cfs,  $Q_{100} = 9$  cfs) and OS-6 ( $Q_2 = 0.1$  cfs  $Q_5 = 0.4$  cfs,  $Q_{100} = 3$  cfs). These developed flows sheet flow in a southwesterly direction towards Design Point 10 where a proposed 10' Type R Sump Inlet will be installed to completely intercept both the 5 yr. and 100 yr. developed flows. The emergency overflow will be 12" and then south over the highpoint. It is planned with this report that with the future development of this portion of Sterling Ranch (Basin OS-6) developed flows equal to pre-development quantities are accounted for downstream in the existing on-site Pond 2. These future flows quantities will be treated and detained within Pond 2. Any developed flows above these quantities will need to be routed further downstream within the Sterling Ranch development.

**Design Point 11 (Q**<sub>5</sub> = 2 cfs,  $Q_{100}$  = 4 cfs) represents developed flows from Basin P. At this location, a proposed 5' Type R Sump Inlet will be installed to completely intercept both the 5 yr. and 100 yr. developed flows. The emergency overflow will be 12" and then southerly over the highpoint of Owl Perch Loop.

**Design Point 12 (Q**<sub>5</sub> = **4 cfs, Q**<sub>100</sub> = **9 cfs)** represents the developed flows from Basin R. At this location, a proposed 10' Type R At-grade Inlet will be installed to intercept 99% of the 5 yr. and 75% of the 100 yr. developed flows. The flow-by (Q<sub>5</sub> = 0 cfs, Q<sub>100</sub> = 2.3 cfs) will then continue down the street to the west towards Design Point 13. (See Appendix for calculations)

**Design Point 13 (Q**<sub>5</sub> = 8 cfs,  $Q_{100}$  = 23 cfs) represents flows from Basin S ( $Q_2$  = 5 cfs  $Q_5$  = 8 cfs,  $Q_{100}$  = 22 cfs) and the flow-by from Basin R mentioned above. At this location, a proposed 15'



Type R Sump Inlet will be installed to completely intercept both the 5 yr. and 100 yr. developed flows. The emergency overflow will be 12" and then southerly over the highpoint in Bison Valley Trail.

**Design Point 14 (Q**<sub>5</sub> = 1 cfs,  $Q_{100}$  = 3 cfs) represents flows from Basin T. At this location, a proposed 5' Type R Sump Inlet will be installed to completely intercept both the 5 yr. and 100 yr. developed flows. Again, the emergency overflow will be 12" and then southerly over the highpoint in Bison Valley Trail.

**Pipe Run 15 (Q**<sub>5</sub> = **25 cfs, Q**<sub>100</sub> = **85 cfs)** represents the total developed flows entering the existing Pond 2 at the NE corner via the existing 42" RCP storm stub provided with Filing No. 1 construction. These flows are compared to the anticipated flows at this location in the Filing No. 1 report of Q<sub>5</sub> = 19 cfs, Q<sub>100</sub> = 74 cfs. The existing Pond 2 continues to adequately provide detention and stormwater quality per County criteria with these additional flows.

The following represents the existing Pond 2 with the minor adjusted developed flows: (See revised MHFD-Detention Pond Design Sheets in Appendix)

Existing Detention Pond 2 (Full Spectrum EDB – see multiple storm release data below)

1.03 Ac.-ft. WQCV required

1.16 Ac.-ft. EURV required with 4:1 max. slopes

3.36 Ac.-ft. 100-yr. Storage

5.55 Ac.-ft. Total

Total In-flow:  $Q_2 = 24.5 \text{ cfs}, Q_5 = 43.1 \text{ cfs}, Q_{100} = 135.8 \text{ cfs}$ 

Pond Design Release:  $Q_2 = 0.9 \text{ cfs}$ ,  $Q_5 = 13.5 \text{ cfs}$ ,  $Q_{100} = 96.2 \text{ cfs}$ 

Pre-development Release:  $Q_2 = 9.1 \text{ cfs}$ ,  $Q_5 = 25.4 \text{ cfs}$ ,  $Q_{100} = 115.0 \text{ cfs}$ 

(Existing ownership and maintenance by the Retreat at TimberRidge Metro District 2)



**Basin U** ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 5$  cfs) represents a portion of the rear yards of proposed lots 61-67. These developed flows were accounted for in the previous report for Filing No. 1 and remain consistent with the anticipated flows at this location of  $(Q_5 = 2 \text{ cfs}, Q_{100} = 5 \text{ cfs})$ . **Basin V** ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 6$  cfs) represents the rear yards of the proposed lots 44-54. These developed flows will sheet flow in a southeasterly direction and directly into the proposed off-site swale and ultimately into the temporary sediment basin proposed at the southerly termination point of Bison Valley Trail. Based on the extremely large lot depths (215'+), given the minimal unconnected impervious area anticipated at the rear of these lots and the sizeable receiving pervious area per lot, the WQCV reduction = 100% with 0 untreated WQCV within this basin. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix) Basin **OS-7** ( $Q_2 = 0.2$  cfs  $Q_5 = 0.8$  cfs,  $Q_{100} = 5$  cfs) represents an off-site basin within the future Sterling Ranch development that will continue to sheet flow in its historic drainage pattern. The TimberRidge development will coordinate with the Sterling Ranch property owner for the acquisition of appropriate temporary grading and permanent drainage easements along the eastern property line to facility this drainage condition. Basin W ( $Q_2 = 1$  cfs  $Q_5 = 2$  cfs,  $Q_{100} = 5$ cfs) represents the rear yards of the proposed lots 54-60. Given the minimal unconnected impervious area introduced and sizeable receiving pervious area per lot, the WQCV reduction = 100% with 0 untreated WQCV within this basin. (See UD-BMP Runoff Reduction Sheet – Ver. 3.07 in Appendix) Regardless, these rear yard developed flows sheet flow in a southerly direction directly into the off-site swale and ultimately into the temporary sediment basin proposed at the southerly termination point of Bison Valley Trail. **Design Point 15** ( $Q_5 = 4$  cfs,  $Q_{100} = 15$  cfs) represents the combined flows from basins OS-7, V and W described above. At this location, a temporary sediment basin proposed at the southerly termination point of Bison Valley Trail will provide sediment control for these developed flows until a permanent downstream facility is constructed within this portion of the future Sterling Ranch development. Coordination with the Sterling Ranch property owner is taking place for the acquisition of appropriate temporary grading and permanent drainage easements along the southern property line to facilitate these facilities. Upon future development of Sterling Ranch



in this area, Basins V, W and OS-7 will be further analyzed to determine how to potentially eliminate the swale along the property line.

# **DETENTION / STORMWATER QUALITY FACILITES**

As required, storm water quality measures will be utilized in order to reduce the amount of sediment, debris and pollutants that are allowed to enter Sand Creek. These features include but are not limited to Full Spectrum Detention Basins and temporary sediment basins. Site Planning and design techniques for the large lot, rural areas should help limit impervious area, minimize directly impervious area, lengthen time of travel and increase infiltration in order to decrease the rate and volume of stormwater runoff. Urban areas that require detention will provide a Water Quality Capture Volume (WQCV) and Excess Urban Runoff Volume (EURV) in the lower portion of the facility storage volume that will release the more frequent storms at a slower rate to help minimize the effects of development of the property. The proposed detention/SWQ facilities are to be private facilities with ownership and maintenance by the TimberRidge Metropolitan District

1. After completion of construction and upon the Board of County Commissioners acceptance, the Sand Creek channel and proposed structural improvements will be owned and maintained by the El Paso County along with all drainage facilities within the public Right of Way. Access ramps are provided in multiple locations and constructed along with the channel improvements and are accessed from the proposed regional trail along the west side of the channel.

#### SAND CREEK CHANNEL IMPROVEMENTS

As stated in the Sand Creek DBPS, this Reach SC-9 is recommended as a floodplain preservation design concept. Given the fact of the current requirements for detention/SWQ facilities planned for the property with designed release at or below pre-development flows, the existing Sand Creek drainageway is expected to remain stable. From the existing HEC-RAS model provided in the appendix, channel velocities through this portion of the reach range from 2.5 - 7.8 ft/s and the shear stress range from 1.3 - 10.2 lb/sq ft. Although, based on the findings from the CORE



Consultants, Inc. Impact Identification Report, no significant erosion or channel degradation through this property currently exists at this time. Specifically located grade control structures (See Appendix) were specified in the DBPS through this reach in order to slow the channel velocity to the DBPS recommended 7 feet per second and to prevent localized and long-term stream degradation affecting channel linings and overbanks. The allowable velocity and shear stress will vary depending upon the existing riparian vegetation/wetlands found within the channel and overbank floodplain terrace areas. The following general criteria taken from the Mile High Flood Control District (Table 8-3) has been utilized for this channel design with adjustments made for site specific riparian vegetation through this reach (See HEC-RAS Modeling Section below):

A HEC-RAS hydraulic analysis for this portion of Reach SC-9 has been provided in order to determine the necessary channel improvements for the proposed Filing No. 2 development and future Filings. A separate wetland impact report along with the Section 404 permitting, prepared by CORE Consultants, has been developed based on these proposed channel improvements and submitted directly to the U.S. Army Corps of Engineers with necessary consult with U.S. Fish and Wildlife for their review and approval. This report and documentation can be found in the Appendix for El Paso County staff review.



Open Channels Chapter 8

Table 8-3. Design parameters for naturalized channels

| Design Parameter                                                                                | Design Value                                                                   |
|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Maximum 100-year depth outside of bankfull channel                                              | 5 ft                                                                           |
| Roughness values                                                                                | Per Table 8-5                                                                  |
| Maximum 5-year velocity, main channel (within bankfull channel width) (ft/s)                    | 5 ft/s                                                                         |
| Maximum 100-year velocity, main channel (within bankfull channel width) (ft/s)                  | 7 ft/s                                                                         |
| Froude No., 5-year, main channel (within bankfull channel width)                                | 0.7                                                                            |
| Froude No., 100-year, main channel (within bankfull channel width)                              | 0.8                                                                            |
| Maximum shear stress, 100-year, main channel (within bankfull channel width)                    | 1.2 lb/sf                                                                      |
| Minimum bankfull capacity of bankfull channel (based on future development conditions)          | 70% of 2-year discharge or<br>10% of 100-yr discharge,<br>whichever is greater |
| Minimum bankfull channel geometry                                                               | Per Table 8-2                                                                  |
| Minimum bankfull channel width/depth ratio (Equation 8-3)                                       | 9                                                                              |
| Minimum entrenchment ratio (Equation 8-4)                                                       | 3                                                                              |
| Maximum longitudinal slope of low flow channel (assuming unlined, unvegetated low flow channel) | 0.2 percent                                                                    |
| Bankfull channel sinuosity (Equation 8-5)                                                       | 1.1 to 1.3                                                                     |
| Maximum overbank side slope                                                                     | 4(H):1(V)                                                                      |
| Maximum bankfull side slope                                                                     | 2.5(H):1(V)                                                                    |
| Minimum radius of curvature                                                                     | 2.5 times top width                                                            |

(See page 22 below for allowable shear stress adjustments)

Roughly equivalent to a 1.5-year event based on extrapolation of regional data.

#### **HEC-RAS MODELING**

Autodesk River and Flood Analysis Module 2019 and HEC-RAS ver. 5.0.6 were used to perform an updated one-dimensional, steady flow hydraulic model of the upper portion of Reach SC-9 from Arroya Lane down to approximately 500 feet north of the Poco Road culvert crossing constructed with Retreat at TimberRidge Filing No. 1. This AutoCAD River Module was used to define the stream centerline, overbanks, cross-sections and manning's n values. The stream centerline follows the channel thalweg to define the reach network. Cross-section topography data was obtained by using the generated surface from the 2-ft. flown contours utilized for all site design. This data was then utilized within the AutoCAD River Module containing three-dimensional coordinates for the stream centerline, cross-sections, reach stations, overbank stations and reach lengths. Two separate models defining the existing condition and proposed condition were prepared using the same centerline stationing. Different Manning's n values were applied across the various channel cross-sections to reflect the changes in vegetative cover within the channel and overbanks. The selected Manning's n values for the channel and overbanks were determined using Tables 10-1 and 10-2 from the DCM and Table 3 from the USGS Guide for selecting Manning's Roughness Coefficients based on numerous site visits in an effort to photograph and document each cross-section. (See Appendix) The following table summarizes the selected Manning's n values:

Table 1 Manning's n Values

| Feature                      | Manning's n Value |
|------------------------------|-------------------|
| Main Channel                 | 0.03 – 0.10       |
| Overbank Floodplain Terraces | 0.12 - 0.16       |

Steady flow data was entered starting just south of Arroya Lane, channel station 27+00.00 down to approximately 500 feet north of the Poco Road crossing, channel station 1+00.00 all within the Sand Creek DBPS segment 171. Steady flow data corresponding to recurrence intervals of 100 Yr. for the FEMA and DBPS conditions was entered. The models were run in subcritical mode to



evaluate hydraulic conditions. Boundary conditions for the entire reach were based on normal depth calculations for the upstream and downstream channel slopes. The following table summarizes the flows used in the models:

Table 2 Model Flow Values

| Flood Event / Location | Flow Value (cfs) |  |
|------------------------|------------------|--|
| DBPS Segment 171       |                  |  |
| FEMA 100 Yr.           | 2600             |  |
| DBPS 100 Yr.           | 2170             |  |

Per the approved DBPS, the anticipated developed flows just upstream of this project are  $Q_{10}$  = 630 cfs and  $Q_{100}$  = 2170 cfs as depicted within DBPS segment no. 171. As discussed earlier, the FEMA FIS flows appear to be significantly higher than both those presented in the DBPS and the Sterling Ranch MDDP. However, we have continued to utilize the significantly larger flows as determined by the FEMA FIS (2600 cfs) in the channel improvement designs. The proposed public roadway crossing of Sand Creek at Poco Road was constructed with Filing No. 1 and consisted of a two cell multi-plate steel single radius arch (24' x 10.33') with concrete headwalls to facilitate the conveyance of the 100 yr. flow.

Based on site visits during May and July of 2019, the entire Sand Creek drainage corridor through the Retreat at TimberRidge development was walked and photographed for documentation purposes and aide in the HEC-RAS modeling. (See Appendix) As discovered in the field and documented in the photos taken at each HEC-RAS station, this reach of the Sand Creek channel appears very stable with no signs of erosion within the main channel or channel overbanks. This is mainly due to the significant vegetal cover throughout the reach. The classification of the vegetal cover seems to have a range from Retardance Class A-C as defined by HEC-15 chart (See Appendix) This type of vegetation retardance significantly increases the allowable shear stress within the channel while reducing the velocity. The following table defines the retardance level based on the vegetation class:



Table 3

Vegetal Retardance Curve Index by SCS Retardance Class

| SCS Retardance Class | Retardance Curve Index |  |
|----------------------|------------------------|--|
| А                    | 10.0                   |  |
| В                    | 7.64                   |  |
| С                    | 5.60                   |  |
| D                    | 4.44                   |  |
| E                    | 2.88                   |  |

Based on this information, the maximum allowable sheer stress is found by the flowing equation:

T = 0.75Curve Index

Thus, the allowable range of shear stress for this reach of Sand Creek equals 4.2 - 7.5 (lb/ft<sup>2</sup>).

With the proposed channel improvements/structures, all sections within this reach fall within the shear stress range above.

Referencing the HEC-RAS model existing conditions calculations in the Appendix shows that several station sections showed velocity between the recommended 5.0 - 7.0 ft./sec. per Table 8.3 and shear stress exceeding the limit above. These stations are as follows: 5+00-8+00, 20+00 and 22+00. Improvements constructed with Filing No. 1 included a sheet pile check structure installed at approximately Station 6+40. The channel improvements proposed within Filing No. 2 consist of widening of the floodplain from stations 6+50-10+00, installation of rip-rap stabilization from stations 6+50-11+00 and installation of three additional check structure located at stations 2+00, 9+00 and 22+00.

The DBPS recommended to provide selective rip-rap channel stabilization located at culvert crossings, pipe outlets and outside bends of the channel. Based on the mean channel slope of 1.58% for this stretch and maximum allowable velocity criteria of 7.0 fps, Type L Rip-Rap stabilization will be provided at select locations within Filing No. 2. (See Appendix for d<sub>50</sub>



calculation and tables describing slope, velocity, shear, Froude No., etc.) Between stations 6+50 and 10+00, the north side of the natural channel floodplain is proposed to be widened to help mitigate the existing velocity and sheer in this area. Then both sides of the channel through this stretch will be provided with rip-rap stabilization. The existing channel slope throughout this reach ranges from 0.7% to 2.5%. Per the HEC-RAS model, the proposed channel velocities, after improvements range from 2.6 ft./sec. to 5.6 ft./sec. All stations are within the allowable velocity of 7.0 ft./sec. and check structure improvements are proposed at the specific stations where velocity is over 5.0 ft/sec. and shear stress is above 5.0 based on the SCS Retardance Index above. The proposed model calculations also shows a few stations with Froude Nos. over the 0.8 criteria. However, at this specific areas, the proposed check structures are planned.

The DBPS does not depict any structures along this stretch of channel. However, three additional structures are being planned to further limit degradation and help control the elevation of the channel invert as well as aide in the adjacent wetland mitigation self-irrigation plan. The check structures are designed to be sheet piling with a concrete cap per Urban Drainage Vol. 2 Figures 9-27 thru 9-28. The intent of this structure is to hold grade so if the stream wants to flatten its equilibrium slope, the incision is limited. Thus, the plan is for this structure to eventually become drop structures as dictated by future channel characteristics.

A public trail/ access road along the west side of Sand Creek is planned and will allow for maintenance access to associated channel improvements. Maintenance access along east side of channel is also provided. (See channel plans for exact ramp locations and details)

#### **DRAINAGE CRITERIA**

Hydrologic calculations were performed using the City of Colorado Springs/El Paso County Drainage Criteria Manual, as revised in November 1991 and October 1994 with County adopted Chapter 6 and Section 3.2.1 of Chapter 13 of the City of Colorado Springs/El Paso County Drainage Criteria Manual as revised in May 2014. Individual on-site developed basin design used for



detention/SWQ basin sizing, inlet sizing and storm system routing was calculated using the Rational Method. Runoff Coefficients are based on the imperviousness of the particular land use and the hydrologic soil type in accordance with Table 6-6. The average rainfall intensity, by recurrence interval found in the Intensity-Duration-Frequency (IDF) curves in Figure 6-5. (See Appendix)

The City of Colorado Springs/El Paso County DCM requires the Four Step Process for receiving water protection that focuses on reducing runoff volumes, treating the water quality capture volume (WQCV), stabilizing drainage ways, and implementing long-term source controls. The Four Step Process pertains to management of smaller, frequently occurring storm events, as opposed to larger storms for which drainage and flood control infrastructure are sized. Implementation of these four steps helps to achieve storm water permit requirements.

This site adheres to this **Four Step Process** as follows:

1. Employ Runoff Reduction Practices: Proposed rural lot impervious area (roof tops, patios, etc.) will sheet flow across lengthy landscape/natural areas within the large lots and proposed urban lot impervious areas (roof tops, patios, etc.) will sheet flow across landscaped yards and through open space areas to slow runoff and increase time of concentration prior to being conveyed to the proposed public streets or detention facilities. This will minimize directly connected impervious areas within the project site.

Reference the Water Quality Treatment Plan Map in the Appendix for the following calculations:

Area qualifies for exclusion E – large lot single family

11.07 ac.

Area qualifies for exclusion H – stream stabilization

7.73 ac.

Area treated in proposed permanent Pond 3

22.89 ac.

Area treated in existing permanent Pond 2

26.83 ac.



Area of runoff reduction water quality treatment 7.31 ac. (Reference Runoff Reduction Calculations in Appendix for these areas)

Filing No. 2 Total platted area <u>75.83 ac.</u>

Off-site area treated in temporary sediment basins 16.40 ac.

- 2. Stabilize Drainageways: After developed flows utilize the runoff reduction practices through the front and rear yards, developed flows will travel via roadside ditches in the large lot, rural portions of the development, curb and gutter within the public streets in the urban portions of the development and eventually public storm systems. These collected flows are then routed directly to multiple extended detention basins (full-spectrum facilities). Where developed flows are not able to be routed to public street, sheet flows will travel across landscaped rear yards and then through undeveloped property prior to entering Sand Creek. The Sand Creek channel corridor will be protected with various channel improvements as recommended in the Sand Creek DBPS and proposed with this Filing in order to reduce velocities to erosive levels.
- 3. Provide Water Quality Capture Volume (WQCV): Runoff from this development will be treated through capture and slow release of the WQCV and excess urban runoff volume (EURV) in the proposed Full-Spectrum permanent Extended Detention Basins designed per current El Paso County drainage criteria. For the 7.31 ac. that is not able to be captured and routed to one of the permanent EDB's, Runoff Reduction practices are required and provided in the 25' rear setbacks of the lots within these specific basins. Reference Runoff Reduction Calculations in Appendix for these areas that show an 87% WQCV Reduction and meets El Paso County standards.
- 4. **Consider need for Industrial and Commercial BMPs**: No industrial or commercial uses are proposed within this development. However, a site-specific storm water quality and erosion control plan and narrative has been submitted along with the grading and erosion



control plan. Details such as site-specific sediment and erosion control construction BMP's as well as temporary and permanent BMP's were detailed in this plan and narrative to protect receiving waters. Multiple temporary BMP's are proposed based on specific phasing of the overall development. BMP's will be constructed and maintained as the development has been graded and erosion control methods employed.

#### **FLOODPLAIN STATEMENT**

Portions of this site are located within a floodplain as determined by the Flood Insurance Rate Maps (F.I.R.M.) Map Number 08041C 0535G with effective date of December 7, 2018 and the previously mentioned LOMR 08-08-0541P with an effective date of July 23, 2009. (See Appendix).

#### **DRAINAGE AND BRIDGE FEES**

This site lies entirely within the Sand Creek Drainage Basin boundaries.

The fees are calculated using the following impervious acreage method approved by El Paso County. The Retreat at TimberRidge Filing No. 2 has a total area of 75.83 acres with the following different land uses proposed:

| 7.74 Ac.  | Sand Creek Drainage corridor (Tract B)                   |
|-----------|----------------------------------------------------------|
| 0.96 Ac.  | Detention Facility (Tract A)                             |
| 34.30 Ac. | 2.5 Ac. lots (Rural Lots 1-12 incl. ROW dedication)      |
| 32.83 Ac. | 1/3 Ac. lots (Urban Lots 13-90 with avg. size 15,575 SF) |
| 75 83     | Total                                                    |

The percent imperviousness for this subdivision is calculated as follows:

# **Fees for Sand Creek Drainage Corridor**

(Per El Paso County Percent Impervious Chart: 2%)

7.74 Ac.  $\times$  2% = **0.15 Impervious Ac.** 



# **Fees for Detention Facilities & Park**

(Per El Paso County Percent Impervious Chart: 7%)

0.96 Ac. x 7% = 0.07 Impervious Ac.

# Fees for 2.5 Ac. lots

(Per El Paso County Percent Impervious Chart: 11% with 25% fee reduction for

2.5 ac. lots planned – ECM 3.10.2a) – Reduction for Drainage Fees only

34.30 Ac. x 11% x 75% = **2.83 Impervious Ac.** (Drainage Fees)

34.30 Ac. x 11% = **3.77 Impervious Ac.** (Bridge Fees)

Fees for 1/3 Ac. lots (Avg. lot size of 15,575 SF)

(Per El Paso County Percent Impervious Chart: 30%)

32.83 Ac.  $\times$  30% = **9.85 Impervious Ac.** 

**Total Impervious Acreage:** 12.90 Imp. Ac. (Drainage Fees)

**Total Impervious Acreage:** 13.84 Imp. Ac. (Bridge Fees)

The following calculations are based on the 2021 Sand Creek drainage/bridge fees:

#### **ESTIMATED FEE TOTALS:**

**Bridge Fees** 

\$ 8,339.00 x 13.84 Impervious Ac. = **\$ 115,411.76** 

**Drainage Fees** 

\$ 20,387.00 x 12.90 Impervious Ac. = \$ 262,992.30



In order to ascertain the current drainage fee versus reimbursable drainage facility obligations, the Sand Creek Drainage Basin Planning Study (Kiowa Engineering Corporations, dated March 1996) was consulted.

For the TimberRidge Filing No. 2 community, the reimbursable drainage facilities identified in the DBPS are as follows:

| <u>Item</u>     | <u>Location</u>                   | <u>1992 Cost</u> | 2021 Cost (adjusted) |  |  |
|-----------------|-----------------------------------|------------------|----------------------|--|--|
| Check Structure | std. 907+100                      | \$15,300         | \$42,610.00          |  |  |
|                 | (reach SC-9)                      |                  |                      |  |  |
|                 | Total Reimbursable / Improvements |                  | \$42,610.00          |  |  |
|                 | 10% Engineering                   |                  | \$ 4,261.00          |  |  |
|                 | Total                             |                  | \$46,871.00          |  |  |

Based upon the 1992 DBPS recommendations, the actual required Sand Creek improvements far exceed the anticipated reimbursable improvement estimates primarily due to additional regulatory requirements at the local and federal level. The \$46,871.00 will be used to offset drainage fees for Filing No. 2, and a future drainage board request will be made to propose adding required channel improvements to the DBPS.

An excerpt from the approved Filing No. 1 report is as follows:

#### **ESTIMATED FEE TOTALS:**

**Bridge Fees** 

\$ 5,559.00 x 11.36 Impervious Ac. = **\$ 63,150.24** 

**Drainage Fees** 

\$ 18,940.00 x 10.43 Impervious Ac. = **\$ 197,544.20** 

Per the ECM 3.10.5.a, this development requests a reduction of drainage fees based on the onsite regional channel improvements for this stretch of Sand Creek Reach SC-9 as shown in the



DBPS. The following facilities within the Sand Creek Drainage Basin seem to meet the criteria for this reduction:

Sand Creek Channel Improvements per DBPS = \$175,000

Proposed Sand Creek Channel Improvements:

Sheet Pile Check Structure w/ Conc. Cap \$35,000 EA x 5 = \$175,000Selective Bank Stabilization (Buried Rip-Rap) \$60/LF x 1400 LF = \$84,000Selective Bank Stabilization (Grading & Reveg.) = \$120,000Total = \$379,000

Actual construction costs incurred for the non-Poco roadway structure/crossing were \$598,142.48 (per Tezak billing summary.)

(Exact facility costs provided upon construction and acceptance by County. Any credits may be used for future Filings)

This indicates that the Filing No. 1 drainage fees of \$197,544.20 were offset by Filing No. 1 channel facility cost per above which allows \$181,455.80 to be used for Filing No. 2 drainage fees (\$379,000 - \$197,544.20). The Filing No. 2 reimbursable facility costs total \$46,871.00 which will require \$34,665.50 in drainage fees to be paid with the recordation of the Filing No. 2 Plat (along with the Filing No. 2 bridge fees of \$115,411.76).

# Fees required to record the Filing No. 2 plat

Drainage: \$34,665.50

Bridge: \$115,411.76

Total: \$150,077.26



#### SUMMARY

The proposed Retreat at TimberRidge Filing No. 2 is within the Sand Creek Drainage Basin. Recommendations are made within this report concerning necessary improvements that will be required as a result of development of this property. The points of storm water release from the proposed site are required to be at or below the calculated historic flow quantities. The development of the proposed site does not significantly impact any downstream facility or property to an extent greater than that which currently exists in the pre-development conditions. All drainage facilities within this report were sized according to the Drainage Criteria Manuals and the full-spectrum storm water quality requirements.

PREPARED BY:

**Classic Consulting Engineers & Surveyors, LLC** 

Marc A. Whorton, P.E.

Project Manager

maw/118520/FDR Fil. 2.doc



#### REFERENCES

- 1. City of Colorado Springs/County of El Paso Drainage Criteria Manual as revised in November 1991 and October 1994 with County adopted Chapter 6 and Section 3.2.1 of Chapter 13 of the City of Colorado Springs/El Paso County Drainage Criteria Manual as revised in May 2014.
- 2. "Urban Storm Drainage Criteria Manual Volume 1, 2 & 3" Urban Drainage and Flood Control District, dated January 2016.
- 3. "Final Drainage Report for Forest Gate Subdivision" Law & Mariotti Consultants, Inc. dated October 2004.
- 4. "Sand Creek Drainage Basin Planning Study," Kiowa Engineering Corporation, dated March 1996.
- 5. "Master Development Drainage Plan for The Retreat at TimberRidge", Classic Consulting, approved March 2018.
- 6. "Preliminary Drainage Report for The Retreat at TimberRidge Preliminary Plan South of Arroya Lane", Classic Consulting, approved October 2018.
- 7. "2018 Sterling Ranch MDDP", M&S Civil Consultants, Inc., June 2018
- 8. "Final Drainage Report for Retreat at TimberRidge Filing No. 1", Classic Consulting, approved November, 2020.




# **APPENDIX**




# **VICINITY MAP**



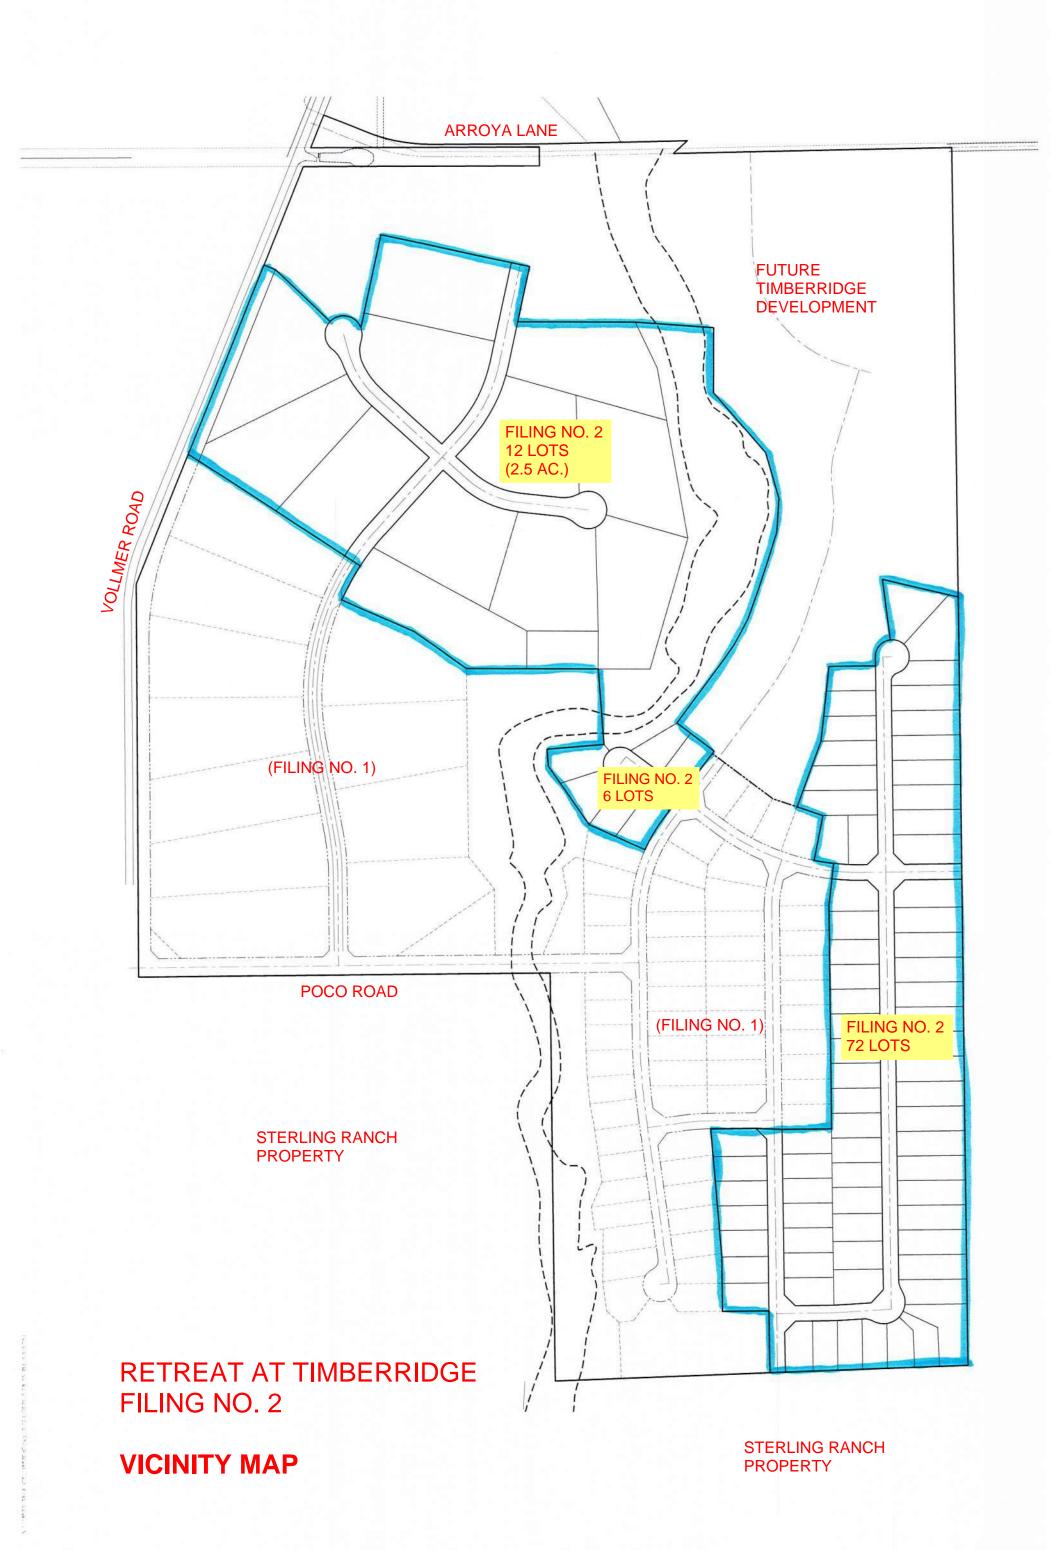

**SOILS MAP (S.C.S SURVEY)** 



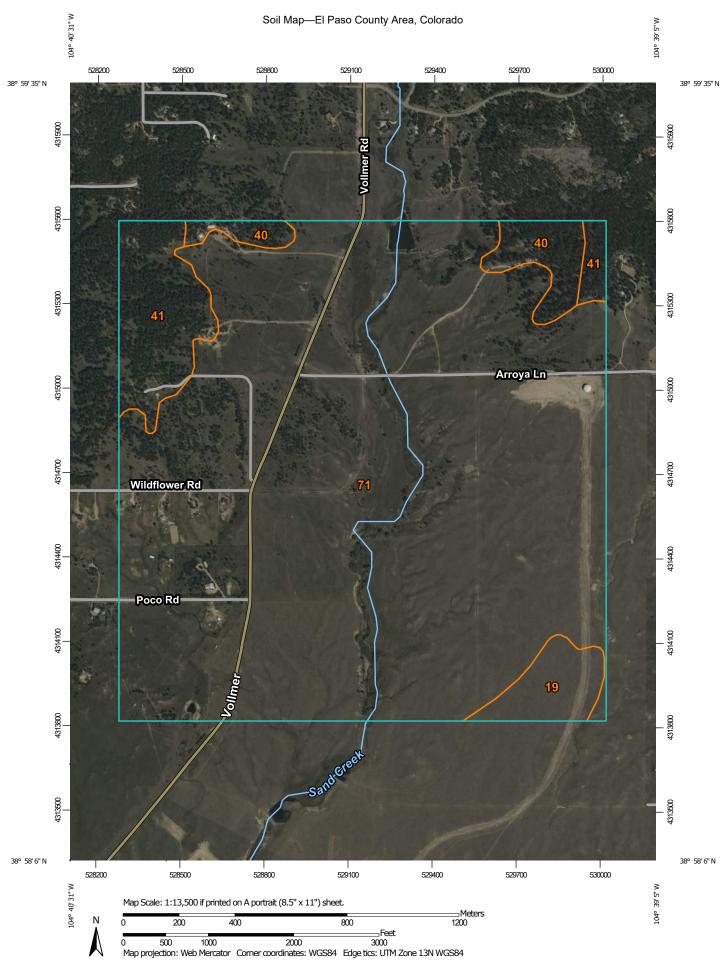

#### MAP LEGEND

â

00

Δ

**Water Features** 

Transportation

---

Background

Spoil Area

Stony Spot

Wet Spot

Other

Rails

**US Routes** 

Major Roads

Local Roads

Very Stony Spot

Special Line Features

Streams and Canals

Interstate Highways

Aerial Photography

#### Area of Interest (AOI)

Area of Interest (AOI)

#### Soils

Soil Map Unit Polygons



Soil Map Unit Points

#### **Special Point Features**

Blowout

 $\boxtimes$ Borrow Pit

36 Clay Spot

Closed Depression

Gravel Pit

**Gravelly Spot** 

Landfill

Lava Flow Marsh or swamp

Mine or Quarry Miscellaneous Water

Perennial Water

Rock Outcrop

Saline Spot

Sandy Spot Severely Eroded Spot

Sinkhole

Slide or Slip

Sodic Spot

#### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24.000.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 18, Jun 5, 2020

Soil map units are labeled (as space allows) for map scales 1:50.000 or larger.

Date(s) aerial images were photographed: Sep 11, 2018—Oct 20, 2018

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

**Natural Resources Conservation Service** 

#### **Map Unit Legend**

| Map Unit Symbol             | Map Unit Name                                        | Acres in AOI | Percent of AOI |
|-----------------------------|------------------------------------------------------|--------------|----------------|
| 19                          | Columbine gravelly sandy loam, 0 to 3 percent slopes | 21.7         | 2.8%           |
| 40                          | Kettle gravelly loamy sand, 3 to 8 percent slopes    | 26.1         | 3.4%           |
| 41                          | Kettle gravelly loamy sand, 8 to 40 percent slopes   | 51.7         | 6.7%           |
| 71                          | Pring coarse sandy loam, 3 to 8 percent slopes       | 667.8        | 87.0%          |
| Totals for Area of Interest |                                                      | 767.3        | 100.0%         |

#### El Paso County Area, Colorado

#### 71—Pring coarse sandy loam, 3 to 8 percent slopes

#### **Map Unit Setting**

National map unit symbol: 369k Elevation: 6,800 to 7,600 feet

Farmland classification: Not prime farmland

#### **Map Unit Composition**

Pring and similar soils: 85 percent

Estimates are based on observations, descriptions, and transects of

the mapunit.

#### **Description of Pring**

#### Setting

Landform: Hills

Landform position (three-dimensional): Side slope

Down-slope shape: Linear Across-slope shape: Linear

Parent material: Arkosic alluvium derived from sedimentary rock

#### Typical profile

A - 0 to 14 inches: coarse sandy loam
C - 14 to 60 inches: gravelly sandy loam

#### **Properties and qualities**

Slope: 3 to 8 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): High

(2.00 to 6.00 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Available water capacity: Low (about 6.0 inches)

#### Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: B Ecological site: R048AY222CO

Hydric soil rating: No

#### **Minor Components**

#### **Pleasant**

Percent of map unit: Landform: Depressions Hydric soil rating: Yes

#### Other soils

Percent of map unit: Hydric soil rating: No

#### **Data Source Information**

Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 18, Jun 5, 2020 F.E.M.A. MAP / LOMR (08-08-0541P)



#### NOTES TO USERS

map is for use in administering the National Flood Insurance Program. It doe necessarily identify all areas subject to fooding, particularly from local dranegerose of small size. The community map repository should be consulted to sible updated or additional flood hazard information. his map is for use in ac

obtain more detailed information in areas where Base Flood Elevations (BFE o obtain more destaled information in areas where Base Flood Elevations (BFEs) didnot floodways have been determined, users are encouraged to causal the Floor folders and Floodway Data and/or Summary of Siliwater Elevations tables contained thinhi the Flood Insurance Study (FIS) report that accompanies this FIRM. Users rould be aware that BFEs shown on the FIRM represent rounded whole-foot sevations. These BFEs are intended for flood insurance rating purposes only and round to be used as the sole source of flood elevation information. Accordingly ood elevation data presented in the FIS report should be utilized in conjunction with e FIRM for purposes of construction and/or floodplain management.

Coastal Base Flood Elevations shown on this map apply only landward of 0.1 North American Vertical Datum of 1988 (NAVD88). Users of this FIRMs should be ware that coastal food elevations are also provided in the Simmary of Sithware Elevations table in the Flood Insurance Study report for this presdiction. Elevations shown in the Summary of Silkwart Elevations table should be used for construction and/or Roodplain management purposes when they are higher than the elevation theorem on this Ellipse.

ertain areas not in Special Flood Hazard Areas may be protected by flood control ructures. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance tudy report for information on flood control structures for this jurisdiction.

Flood elevations on this map are referenced to the North American Vertical Datum of 1988 (NAVD88). These flood elevations must be compared to structure and ground elevations referenced to the same verifical datum. For information region conversion between the Nabonal Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, with the Nabional Geodetic Survey website at http://www.ngs.nosa.gov/ or contact the National Geodetic Survey website at http://www.ngs.nosa.gov/ or contact the National Geodetic Survey at the following address:

NGS Information Ser NOAA, N/NGS12 ational Geodetic Survey SMC-3, #9202

o obtain current elevation, description, and/or location information for bench mark hown on this map, please contact the Information Services Branch of the Nation leodelic Survey at (301) 713-3242 or visit its website at http://www.ngs.ndaa.gov/.

Base Map information shown on this FIRM was provided in digital format by El Pasc County, Colorado Springs Ultilities, and Anderson Consulting Engineers, Inc. These data are current as of 2008.

This map reflects more detailed and up-to-date stream channel configurations and floodplain delineations than those shown on the previous FIRM for this jurisdiction. The floodplain and floodways that were transferred from the previous FIRM so this jurisdiction. The floodplain and floodways that were transferred from the previous FIRM so that previous FIRM so that the state of the flood insurance. So a result, the Flood floodway Date tables in the Flood insurance. So a flood floodway Date tables in the Flood insurance. Set distances that differ from what is shown on this map. The profile baselines depicted and infloodway Date is shown on this map. The profile baselines depicted and infloodway Date Tables If applicable, in the FIS report. As a result, the profile baselines and evaluate signification if many profile tables in the Floodway Date Tables If applicable, in the FIS report. As a result, the profile baselines and evaluate signification if may appear outside of the floodplain.


reporate limits shown on this map are based on the best data available at the tir

Please refer to the separately printed Map Index for an overview map of the county showing the layout of map panels, community map repository addresses; and a usting of Communities table containing National Flood insurance Program dates for each community as well as a listing of the panels on which each community is

Contact FEMA Map Service Center (MSC) via the FEMA Map information exchange (FMIX) 1-877-335-2677 for information on available products associated with things. FIRM. Available products may include previously issued Leltiers of Map Chanton. Plood insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at http://www.mac.fema.gov/.


If you have questions about this map or questions concurning the National Floo-insurance Program in general, please call 1-877-FEMA MAP (1-877-338-2627) of visit the FEMA website at http://www.fema.gov/business/nfip

#### Flooding Source REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION



This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Faderal Emergency Management Agency (FEM).



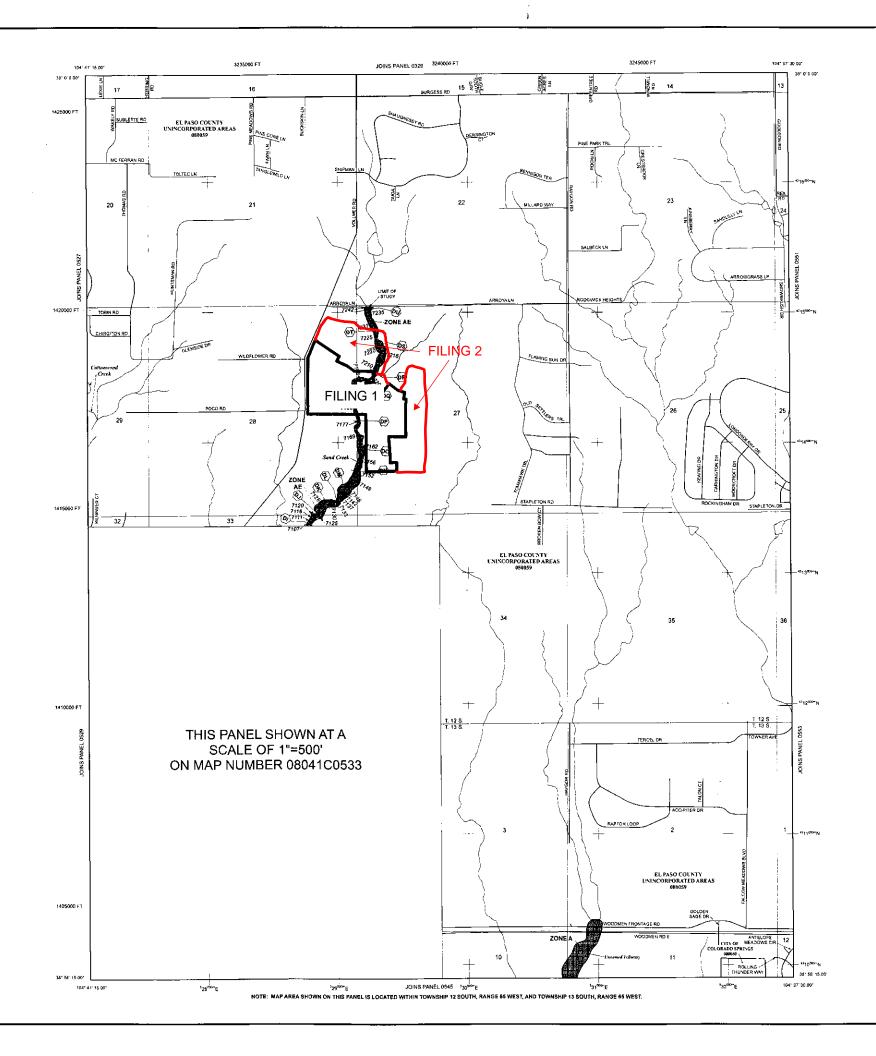

#### LEGEND

SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD

The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1%, chance of being equaled or excessed in any given year. The Special Flood Heard Area is the area subject to flooding by the 1% annual chance flood, Amas of Special Flood Heard floods 2 from J. A.E. A.M., A.A. A.R. A.P. N. Y. A.D. V. The Base Flood Beatlot is the water-surface fleeding of the 1% chance of the 1%

ZONE A No Base Hood Elevations determined.

ZONE AE Base Froot Behalising determined

ZONE AF OF OR OBJAIN OF 1 to 3 feet (usually areas of ponding); Base Floot Elevations determined

Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocibes also determined.

Special Proof Herard Area Formerly protected from the 1% annual chance food by a flood control system that was subsequently decertified. Zone AR indicates that the former food control system is being restored to provide protection from the 1% annual chance or greater flood.

Area to be protected from 1% annual chance flood by a Federal flood protection system under construction: no Base Fixed Elevations determined.

Coasta flood zone with velocity hazard (wave action); no Base Flood Bevalions determined

Coasta floor zone with velocity hazard (wave action); Base Flood Elevations determined.

FLOODWAY AREAS IN ZONE AE

The floodway is the channel of a stream prissing acjecent floodplain areas that must be kept free of encrosomment so that the 1% annual chance flood can be carried without substantial increases in flood beights.

OTHER FLOOD AREAS

Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less then 1 floot or with drawage areas less than 1 square male; and areas protected by levees from 1% annual chance flood.

OTHER AREAS

ZONE D Areas in which flood nazards are undetermined, but possible.

COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS

OTHERWISE PROTECTED AREAS (OPAs)

CBRS areas and OPAs are normally recalled within or adjacent to Special Floor H

Floodplain boundary Zone D Boundary

CBRS and OPA boundar

Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, Flood depths or flood velocities

— 513 → Base Flood Elevation line and value; elevation in feet\* (EL 987) Base Flood Elevation value where uniform within zone; elevation in feet\*

\* Referenced to the North American Vertical Datum of 1988 (NAVID 88)

(<u>A</u>)——(<u>A</u>)

97 07 30.00° 32 27 30.00°

1000-meter Universal Transverse Mercator grid ticks, zone 13

5000-foot gnd toks: Colorado State Plane co-system, central zone (FIPSZONE 0502). Lampert Conformat Conk, Projection.

DX5510

\_ M1.5

MAP REPOS TORIES

Refer to Map Repositories I st on Map Index

EFFECTIVE DATE(S) DF REVISION(S) TO THIS PANEL DECEMBER 7, 2016 - to update corporate 1-the, to change Base Flood Elevations and Sceoul Popol Mazzan Aires, to update near Dimera; is add neads such road names, and to scorporate previously sessed tables of Map Revision.

For community map revision Existory poor to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is evaluable in this community, contact your insurance agent or call the National Flood Insurance Program at 2-800-638-6620.

MAP SCALE 1" = 1000" METERS

PANEL 0535G

FLOOD INSURANCE RATE MAP EL PASO COUNTY, COLORADO AND INCORPORATED AREAS

PANEL 535 OF 1300

(SEE MAP INDEX FOR FIRM PANEL LAYOUT

COMMUNITY NUMBER PANEL SUFFIX COLORADO SPRINOS, CITY OF DIAGRE 625 E. MASO COUNTY 86056 658

NATROINAL FLOODHINGÚ



MAP REVISED **DECEMBER 7, 2018** Federal Emergency Management Agency Page 1 of 4 Issue Date: March 6, 2009 Effective Date: July 23, 2009 Case No.: 08-08-0541P LOMR-APP



#### Federal Emergency Management Agency

Washington, D.C. 20472

#### LETTER OF MAP REVISION **DETERMINATION DOCUMENT**

|             | COMMUNITY AND REVISION                                     | INFORMATION                            | PROJECT DESCRIPTION                                                                        | BASIS OF REQUEST                           |  |  |  |  |
|-------------|------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------|--|--|--|--|
| COMMUNITY   | Co                                                         | so County<br>blorado<br>porated Areas) | NO PROJECT                                                                                 | HYDRAULIC ANALYSIS<br>NEW TOPOGRAPHIC DATA |  |  |  |  |
|             | COMMUNITY NO.: 080059                                      |                                        |                                                                                            |                                            |  |  |  |  |
| IDENTIFIER  | Sand Creek Letter of Map Re<br>Mustang Place to Arroya Lar |                                        | APPROXIMATE LATITUDE & LONGITUDE: 38.971, -104.668 SOURCE: USGS QUADRANGLE DATUM: NAD 27   |                                            |  |  |  |  |
|             | ANNOTATED MAPPING EI                                       | NCLOSURES                              | ANNOTATED STUDY ENCLOSURES                                                                 |                                            |  |  |  |  |
| TYPE: FIRM* | NO.: 08041C0535 F                                          | DATE: March 17, 1997                   | DATE OF EFFECTIVE FLOOD INSU<br>PROFILE(S): 204P(a), 204P(b), 20<br>FLOODWAY DATA TABLE: 5 |                                            |  |  |  |  |

#### FLOODING SOURCE(S) & REVISED REACH(ES)

Sand Creek - from approximately 360 feet downstream of Mustang Place to just downstream of Arroya Lane

|                 | SUMMARY OF REV     | ISIONS           |           |           |
|-----------------|--------------------|------------------|-----------|-----------|
| Flooding Source | Effective Flooding | Revised Flooding | Increases | Decreases |
| Sand Creek      | Zone A             | Zone AE          | YES       | YES       |
|                 | No BFEs*           | BFEs             | YES       | NONE      |
|                 | No Floodway        | Floodway         | YES       | NONE      |

BFEs - Base Flood Elevations

#### DETERMINATION

This document provides the determination from the Department of Homeland Security's Federal Emergency Management Agency (FEMA) regarding a request for a Letter of Map Revision (LOMR) for the area described above. Using the information submitted, we have determined that a revision to the flood hazards depicted in the Flood Insurance Study (FIS) report and/or National Flood Insurance Program (NFIP) map is warranted. This document revises the effective NFIP map, as indicated in the attached documentation. Please use the enclosed annotated map panels revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals in your community.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional Information about the NFIP is available on our website at http://www.fema.gov/nfip.

> David N. Bascom, Program Specialist Engineering Management Branch Mitigation Directorate

Enclosures reflect changes to flooding sources affected by this revision. \* FIRM - Flood Insurance Rate Map; \*\* FBFM - Flood Boundary and Floodway Map; \*\*\* FHBM - Flood Hazard Boundary Map



#### Federal Emergency Management Agency

Washington, D.C. 20472

# LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

#### **COMMUNITY INFORMATION**

#### APPLICABLE NFIP REGULATIONS/COMMUNITY OBLIGATION

We have made this determination pursuant to Section 206 of the Flood Disaster Protection Act of 1973 (P.L. 93-234) and in accordance with the National Flood Insurance Act of 1968, as amended (Title XIII of the Housing and Urban Development Act of 1968, P.L. 90-448), 42 U.S.C. 4001-4128, and 44 CFR Part 65. Pursuant to Section 1361 of the National Flood Insurance Act of 1968, as amended, communities participating in the NFIP are required to adopt and enforce floodplain management regulations that meet or exceed NFIP criteria. These criteria, including adoption of the FIS report and FIRM, and the modifications made by this LOMR, are the minimum requirements for continued NFIP participation and do not supersede more stringent State/Commonwealth or local requirements to which the regulations apply.

We provide the floodway designation to your community as a tool to regulate floodplain development. Therefore, the floodway revision we have described in this letter, while acceptable to us, must also be acceptable to your community and adopted by appropriate community action, as specified in Paragraph 60.3(d) of the NFIP regulations.

#### **COMMUNITY REMINDERS**

We based this determination on the 1-percent-annual-chance flood discharges computed in the FIS for your community without considering subsequent changes in watershed characteristics that could increase flood discharges. Future development of projects upstream could cause increased flood discharges, which could cause increased flood hazards. A comprehensive restudy of your community's flood hazards would consider the cumulative effects of development on flood discharges subsequent to the publication of the FIS report for your community and could, therefore, establish greater flood hazards in this area.

Your community must regulate all proposed floodplain development and ensure that permits required by Federal and/or State/Commonwealth law have been obtained. State/Commonwealth or community officials, based on knowledge of local conditions and in the interest of safety, may set higher standards for construction or may limit development in floodplain areas. If your State/Commonwealth or community has adopted more restrictive or comprehensive floodplain management criteria, those criteria take precedence over the minimum NFIP requirements.

We will not print and distribute this LOMR to primary users, such as local insurance agents or mortgage lenders; instead, the community will serve as a repository for the new data. We encourage you to disseminate the information in this LOMR by preparing a news release for publication in your community's newspaper that describes the revision and explains how your community will provide the data and help interpret the NFIP maps. In that way, interested persons, such as property owners, insurance agents, and mortgage lenders, can benefit from the information.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional Information about the NFIP is available on our website at http://www.fema.gov/nfip.

David N. Bascom, Program Specialist Engineering Management Branch Mitigation Directorate

112553 10.3.1.08080541

102-I-A-C



#### Federal Emergency Management Agency

Washington, D.C. 20472

## LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

We have designated a Consultation Coordination Officer (CCO) to assist your community. The CCO will be the primary liaison between your community and FEMA. For information regarding your CCO, please contact:

Ms. Jeanine D. Petterson
Director, Mitigation Division
Federal Emergency Management Agency, Region VIII
Denver Federal Center, Building 710
P.O. Box 25267
Denver, CO 80225-0267
(303) 235-4830

#### STATUS OF THE COMMUNITY NFIP MAPS

We will not physically revise and republish the FIRM and FIS report for your community to reflect the modifications made by this LOMR at this time. When changes to the previously cited FIRM panel(s) and FIS report warrant physical revision and republication in the future, we will incorporate the modifications made by this LOMR at that time.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional Information about the NFIP is available on our website at http://www.fema.gov/nfip.

David N. Bascom, Program Specialist Engineering Management Branch Mitigation Directorate

112553 10.3.1.08080541

102-I-A-C



#### Federal Emergency Management Agency

Washington, D.C. 20472

# LETTER OF MAP REVISION DETERMINATION DOCUMENT (CONTINUED)

#### **PUBLIC NOTIFICATION OF REVISION**

#### **PUBLIC NOTIFICATION**

| FLOODING SOURCE | LOCATION OF REFERENCED ELEVATION | BFE (FEET | NGVD 29) | MAP PANEL    |
|-----------------|----------------------------------|-----------|----------|--------------|
|                 |                                  | EFFECTIVE | REVISED  | NUMBER(S)    |
| Sand Creek      | Just upstream of Mustang Place   | None      | 6,984    | 08041C0535 F |
|                 | Just downstream of Arroya Lane   | None      | 7,238    | 08041C0535 F |

Within 90 days of the second publication in the local newspaper, a citizen may request that we reconsider this determination. Any request for reconsideration must be based on scientific or technical data. Therefore, this letter will be effective only after the 90-day appeal period has elapsed and we have resolved any appeals that we receive during this appeal period. Until this LOMR is effective, the revised BFEs presented in this LOMR may be changed.

A notice of changes will be published in the *Federal Register*. A short notice also will be published in your local newspaper on or about the dates listed below. Please refer to FEMA's website at https://www.floodmaps.fema.gov/fhm/Scripts/bfe\_main.asp for a more detailed description of proposed BFE changes, which will be posted within a week of the date of this letter.

LOCAL NEWSPAPER

Name: El Paso County News


Dates: 03/18/09 03/25/09

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional Information about the NFIP is available on our website at http://www.fema.gov/nfip.

David N. Bascom, Program Specialist Engineering Management Branch Mitigation Directorate


112553 10.3.1.08080541


102-I-A-C

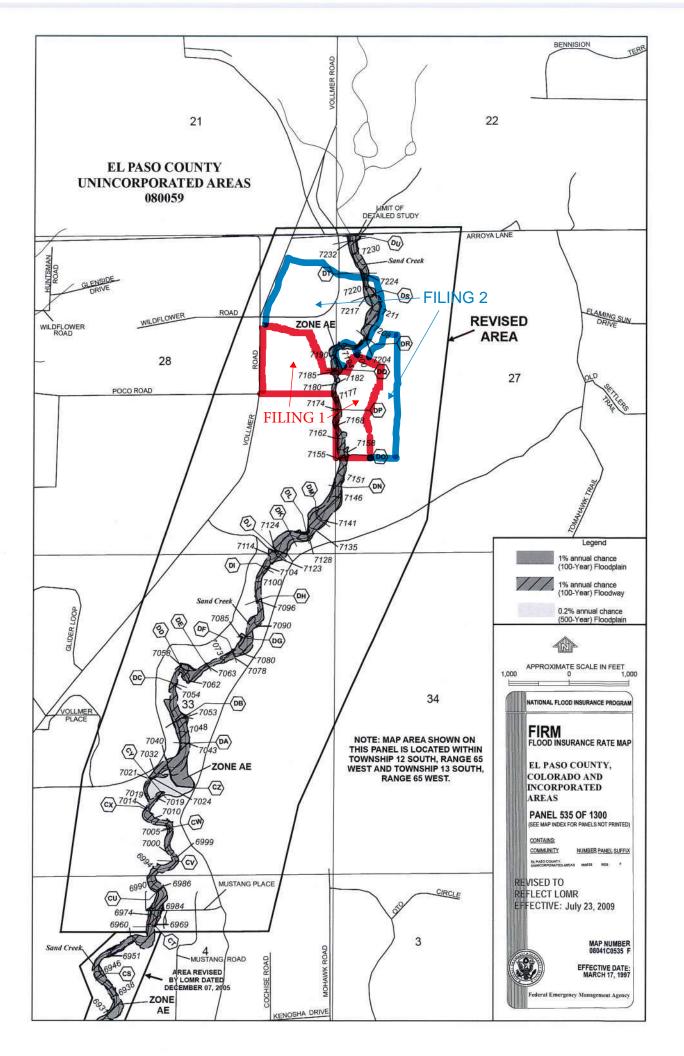



| reek  'd)  65,292  66,092  41  66,247  90  67,647  50  68,297  69,147  50  70,157  70,577  205  70,577  205  70,807  70,807  71,162  71,162  73,644  73,644  73,644  75,142                                                                       | SECTION AREA (SQUARE FEET) | ATTICAL TO                       |                          | LICHLIM          | HILLM                    |     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------|--------------------------|------------------|--------------------------|-----|
| 65,292 164<br>66,092 41<br>66,247 90<br>67,647 50<br>68,297 65<br>69,147 50<br>70,157 50<br>70,577 205<br>70,627 180<br>70,727 210<br>70,807 195<br>71,162 90<br>71,977 226<br>73,052 174                                                         | N                          | VELOCITY<br>(FEET PER<br>SECOND) | REGULATORY               | FLOODWAY<br>FEET | MAY FLOODWAY FEET (NGVD) |     |
| 65,292 164<br>66,092 41<br>66,247 90<br>67,647 50<br>68,297 65<br>69,147 50<br>70,157 50<br>70,577 205<br>70,627 180<br>70,627 180<br>70,727 210<br>70,807 195<br>71,162 90<br>71,977 226<br>71,977 226<br>71,977 226<br>71,977 226<br>73,644 237 | N                          |                                  |                          |                  |                          |     |
| 66,092 41<br>66,247 90<br>67,647 50<br>68,297 65<br>69,147 50<br>70,157 50<br>70,577 205<br>70,627 180<br>70,807 195<br>71,162 90<br>71,977 226<br>71,977 226<br>73,052 174<br>73,052 174                                                         |                            | 6.1                              | 6,748.7                  | 6,748.7          | 6,749.4                  |     |
| 66,247 90<br>67,647 50<br>68,297 65<br>69,147 50<br>70,157 50<br>70,577 205<br>70,627 180<br>70,727 205<br>70,807 195<br>71,162 90<br>71,162 90<br>71,977 226<br>71,977 226<br>71,977 226<br>73,052 174                                           | 223                        | 11.7                             | 6,761.2                  | 6,761.2          | 6,762.2                  |     |
| 67,647 50<br>68,297 65<br>69,147 50<br>70,157 50<br>70,627 180<br>70,727 205<br>70,727 210<br>71,162 90<br>71,162 90<br>71,977 226<br>71,977 226<br>71,977 226<br>73,052 174<br>73,052 174                                                        | 270                        | 9.6                              | 6,773.6                  | 6,773.6          | 6,773.7                  |     |
| 68,297 65<br>69,147 50<br>70,157 50<br>70,627 205<br>70,627 210<br>70,807 195<br>71,162 90<br>71,977 226<br>71,977 226<br>71,977 226<br>71,977 226<br>71,977 226<br>73,052 174                                                                    | 218                        | 11.9                             | 6,782.6                  | 6,782.6          | 6,783.3                  |     |
| 69,147 50<br>70,157 50<br>70,577 205<br>70,627 180<br>70,727 210<br>70,807 195<br>71,162 90<br>71,977 226<br>71,977 226<br>73,052 174<br>73,052 174                                                                                               | 284                        | 8.8                              | 6,793.9                  | 6,793.9          | 6,794.4                  | 0   |
| CG 70,157 50<br>CH 70,577 205<br>CI 70,627 180<br>CJ 70,727 210<br>CK 70,807 195<br>CL 71,162 90<br>CM 71,977 226<br>CM 71,977 226<br>CM 73,052 174<br>CO 73,644 237<br>CP 75,142 172                                                             | 213                        | 11.7                             | 6,804.5                  | 6,804.5          | 6,804.5                  | 0   |
| 70,577 205<br>70,627 180<br>70,727 210<br>70,807 195<br>71,162 90<br>71,977 226<br>73,052 174<br>73,052 174<br>73,644 237<br>75,142 172                                                                                                           | 213                        | 11.7                             | 6,815.1                  | 6,815.1          | 6,815.3                  | 0   |
| 70,627 180<br>70,727 210<br>70,807 195<br>71,162 90<br>71,977 226<br>73,052 174<br>73,052 174<br>73,644 237<br>75,142 172                                                                                                                         | 347                        | 7.2                              | 6,823.9                  | 6,823.9          | 6,824.5                  | 0   |
| 70,727 210<br>70,807 195<br>71,162 90<br>71,977 226<br>73,052 174<br>73,644 237<br>75,142 172                                                                                                                                                     | 267                        | 4.6                              | 6,826.7                  | -                | 6,827.7                  | 1   |
| 70,807 195<br>71,162 90<br>71,977 226<br>73,052 174<br>73,644 237<br>75,142 172                                                                                                                                                                   | 340                        | 7.3                              | 6,831.1                  | •                | 831                      | 0   |
| 71,162 90<br>71,977 226<br>73,052 174<br>73,644 237<br>75,142 172                                                                                                                                                                                 | 334                        | 7.5                              | 6,832.5                  |                  | 832                      | 0.0 |
| 71,977 226<br>73,052 174<br>73,644 237<br>75,142 172                                                                                                                                                                                              | 255                        | 8.6                              |                          | ,838             | 6,839.0                  | Н   |
| 73,052 174<br>73,644 237<br>75,142 172                                                                                                                                                                                                            | 503                        | 5.2                              | 6,847.4                  | 6,847.4          | 6,848.3                  | 0.9 |
| 73,644 237<br>75,142 172                                                                                                                                                                                                                          | 328                        | 7.9                              | 6,861.1                  | 6,861.1          | 6,861.2                  | 0   |
| 75,142 172                                                                                                                                                                                                                                        | 364                        | 7.1                              | 6,870.2                  | 6,870.2          | 6,870.2                  | 0   |
|                                                                                                                                                                                                                                                   | 324                        | 8.0                              | 6,888.5                  | 6,888.5          | 6,888.7                  | 0   |
| 76,161 109                                                                                                                                                                                                                                        | 283                        | 9.2                              | 6,903.5                  |                  | 6,903.7                  | 0.2 |
| 77,846 100                                                                                                                                                                                                                                        | 272                        | 9.6                              | 6,926.1                  | 926              | 6,926.7                  | 0   |
| 187 117                                                                                                                                                                                                                                           | 287                        | 9.1                              | 944.                     | ,944             | 944                      | 0   |
| 80,808 142                                                                                                                                                                                                                                        | 310                        | 8.4                              | 6,969.2                  | 6,969.2          | 6,969.2                  | 0   |
| CU 81,501 120 3                                                                                                                                                                                                                                   | 342                        | 7.6                              | 6,986.1                  | 6,986.1          | 6,986.5                  | 0   |
| CV 82,281 124 2                                                                                                                                                                                                                                   | 295                        | 8.8                              | 6,997.4                  | 6,997.4          | 6,997.4                  | 0.0 |
| CW 82,897 64 2                                                                                                                                                                                                                                    | 3                          | 11.0                             | 7,005.3                  | 7,005.3          | 7,006.1                  | 0.8 |
| 83,517 90                                                                                                                                                                                                                                         | 266                        | 8.6                              | 7,013.9                  | 7,013.9          | 7,013.9                  | 0.0 |
| 84,087 70                                                                                                                                                                                                                                         | 244                        | 10.7                             | 7,024.3                  | 7,024.3          | 7,024.3                  | 0.0 |
| ,473 160                                                                                                                                                                                                                                          | 322                        | 8.1                              |                          | 7,040.2          | 0                        | 0   |
|                                                                                                                                                                                                                                                   |                            | REVISED                          | D T0                     |                  |                          |     |
|                                                                                                                                                                                                                                                   |                            | REFLE(                           | REFLECT LOMR             |                  |                          |     |
| Feet Above Confluence With Fountain Creek                                                                                                                                                                                                         | >                          | EFFECT                           | EFFECTIVE: July 23, 2009 | 600              |                          |     |
| FEDERAL EMERGENCY MANAGEMENT AGENCY                                                                                                                                                                                                               |                            |                                  | H                        | FLOODWAY DATA    | DATA                     |     |
| AND INCORPORATED AREAS                                                                                                                                                                                                                            |                            |                                  |                          | SAND CREEK       | <br> <br> *              |     |

| FLOODING S               | CROSS SECTION                            | Sand Creek | (cont'd) | DA      | DB      | DC      | DD      | DE     | DF      | DG      | DH      | DI      | DC      | DK      | DL      | DM      | ON      | 00      | DP      | ŏ<br>O  | DR      | DS      | DI      | ממ      |            | l<br>Feet Above Confluence | FEDERAL EME                         | AND IN                                    |
|--------------------------|------------------------------------------|------------|----------|---------|---------|---------|---------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------------|----------------------------|-------------------------------------|-------------------------------------------|
| SOURCE                   | DISTANCE <sup>1</sup>                    |            |          | 85,073  | 85,483  | 86,103  | 86,673  | 87,073 | 87,573  | -       | 88,738  | ,30     | 89,663  | 90,058  | 90,348  | 869'06  | 91,388  | 91,868  | 7       | 93,468  | 44      | 95,343  | 5,72    | 96,333  |            | With                       | FEDERAL EMERGENCY MANAGEMENT AGENCY | EL PASO COUNIT, CO AND INCORPORATED AREAS |
|                          | WIDTH<br>(FEET)                          |            |          | 139     | 170     | 100     | 197     | 83     | 86      | 135     | 89      | 74      | 143     | 140     | 102     | 300     | 120     | 105     | 65      | 117     | 81      | 100     | 77      | 06      |            | Fountain                   | EMENT AGEN                          | r, co                                     |
| FLOODWAY                 | SECTION AREA (SQUARE FEET)               |            |          | 456     | 328     | 274     | 434     | 270    | 325     | 304     | 263     | 249     | 309     | 426     | 276     | 398     | 292     | 313     | 239     | 288     | 260     | 274     | 252     | 266     |            | Creek                      | ICY                                 |                                           |
|                          | MEAN<br>VELOCITY<br>(FEET PER<br>SECOND) |            |          | 5.7     | 7.9     |         |         | 9.6    | 8.0     | 8.6     | 6.6     | 10.4    | 8.4     | 6.1     | 9.4     | 6.5     | 8.9     | 8.3     | 10.9    | 0.6     | 10.0    | 9.5     | 10.3    | 8.6     | REVISED TO | EFFECTIVE: July 23, 2009   |                                     |                                           |
| ×                        | REGULATORY                               |            |          | 7,043.0 | 7,053.4 | 7,054.4 | 7,061.7 | 990    | 7,077.7 | 7,085.1 | 7,096.9 | 7,104.1 | 7,123.2 | 7,125.1 | 7,127.6 | 7,141.0 | 7,148.5 | 7,155.2 | 7,173.8 | 7,184.6 | 7,204.5 | 7,216.8 | 7,224.2 | 7,232.5 |            | 7 23, 2009                 | 료                                   |                                           |
| BASE FI<br>WATER SURFACE | WITHOUT<br>FLOODWAY<br>FEET              |            |          | 7,043.0 | 7,053.4 | 054     | 190     | 990    | 077     | 7,085.1 | 7,096.9 | 7,104.1 | 7,123.2 | 7,125.1 | 7,127.6 | 7,141.0 | 7,148.5 | 7,155.2 | 7,173.8 | 7,184.6 | 7,204.5 | 7,216.8 | 7,224.2 | 7,232.5 |            |                            | FLOODWAY DATA                       | SAND CREEK                                |
| FLOOD<br>CE ELEVATION    | NOT WITH WAY FLOODWAY FEET (NGVD)        |            |          | 7,043.1 | 053.    |         | 062.    | 99     | 777     | 985     | 7,096.9 | 7,104.3 | 123     | 12      | 127     | 7,141.0 | 148     | 155     | 7,173.8 | 7,184.6 | 7,204.6 | 217     | 7,224.3 | 7,233.0 |            |                            | DATA                                | <u> </u>                                  |
| 7                        | INCREASE                                 |            |          | 0.1     |         | 0.0     | 0.3     | 0.1    | 0.2     | 0.0     | 0.0     | 0.2     | 0.0     | 0.1     |         |         | 0.1     |         | 0.0     |         |         | 4.0     | 0.1     | 0.5     |            |                            |                                     |                                           |

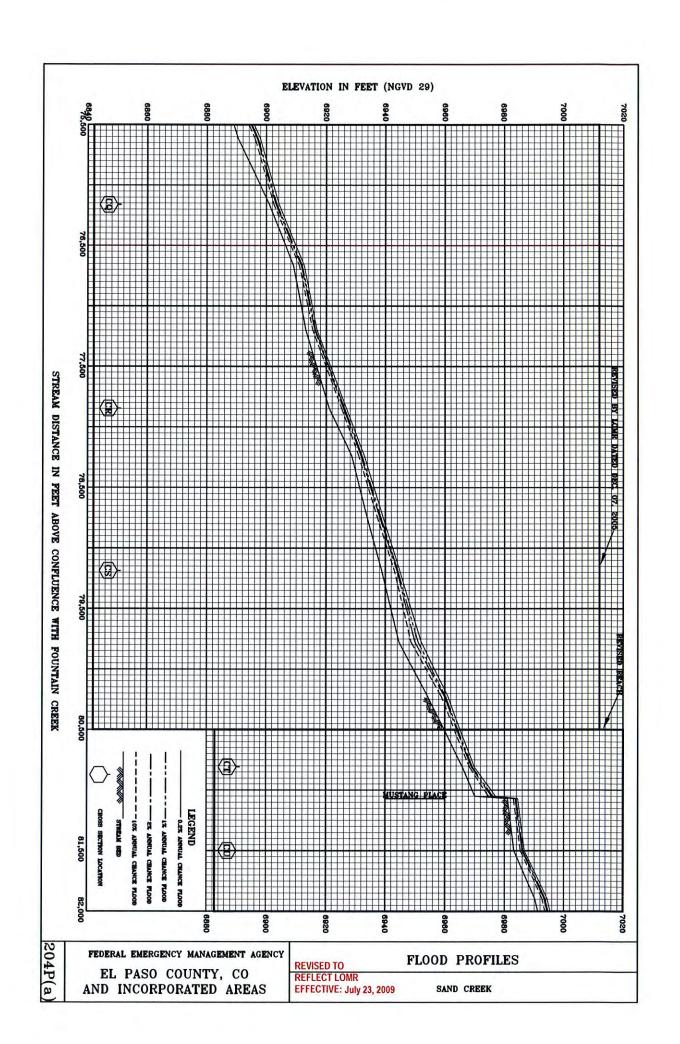

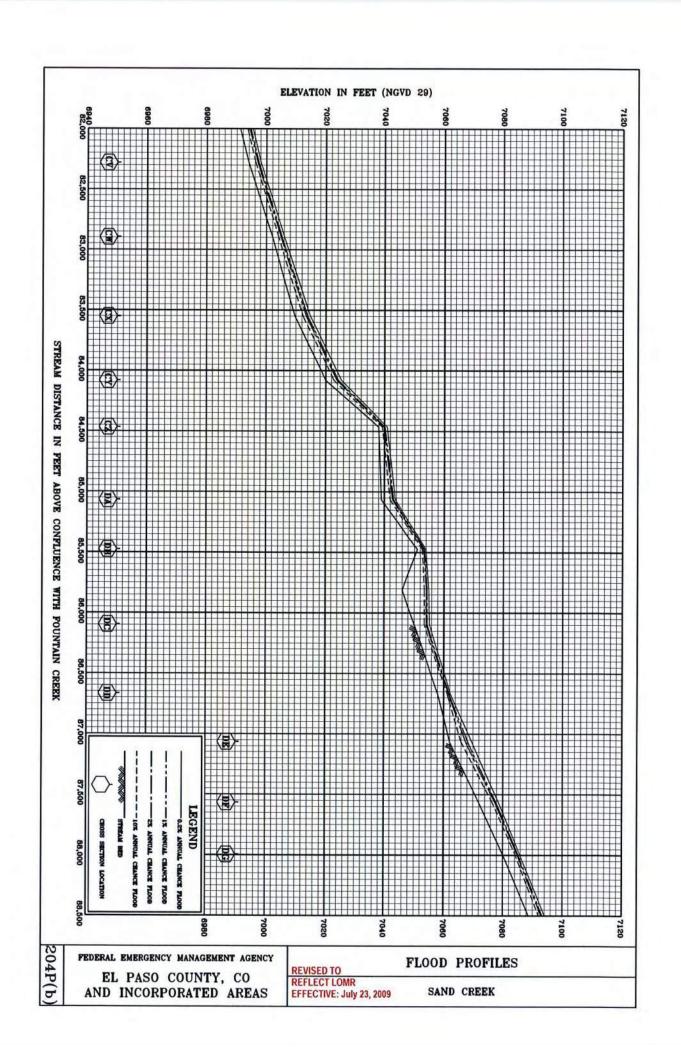

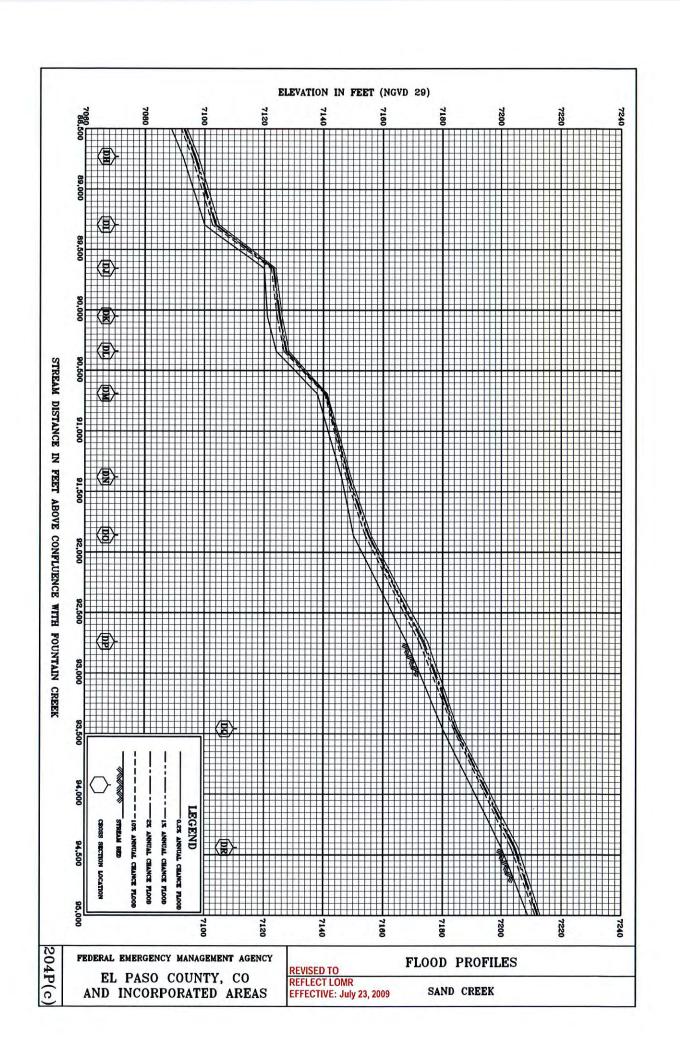

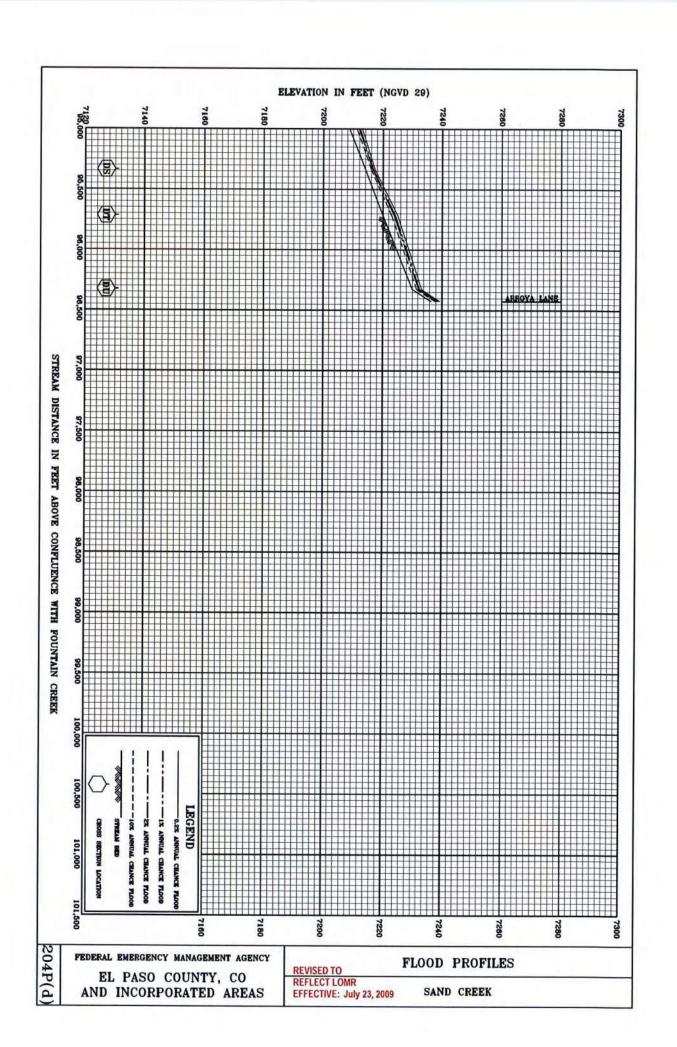

RECOMMENDATIONS PER SAND CREEK DBPS



8061-20608 Colorado Springs, Colorado PRELIMINARY DESIGN PLANS 419 W. Bijou Street SAND CREEK DRAINAGE STUDY 55 Kiowa Engineering Corporation IS A MASTER PLANNING SHEET PRELIMINARY AND CONCEPTUAL IT SHOULD NOT BE USED FOR PURPOSES. SELECTIVE RIPRAP L GRADE CONTROL CHANNEL IMPROVEMENTS TO SENSE WITH THE EXISTING FLOODPLIN ON THE LOW FLOW FLOW FOR SOFT SHALL BE PRESENTED WITH THE SOFT SHALL BE PRESENTED WITH THE SHALL BE SOFT SHALL BE SOFT SHALL BE SOFT SHALL BE SOFT SHALL SHALL BE SOFT SHALL SHALL BE SOFT SHALL SHALL BE SOFT SHALL SH 2170 THIS DRAWING IS REPRESENTING P ENGINEERING. I STA 933 + 80 56 MATCH SHT SHEET 54 STA 905 +00

# VI. DEVELOPMENT OF ALTERNATIVES AND RECOMMENDED PLAN

The concepts which are available for handling stormwater mnoff within the Sand Creek basin have been presented and discussed in detail in the Sand Creek Drainage Basin Planning Study Development of Alternatives Report and the draft East Fork Sand Creek Drainage Basin Planning Study. The process of combining the various channel treatment options, detention schemes and roadway crossing structures into a contiguous plan for all of the reaches is presented in this chapter of the report. As a result of the evaluation of the flood control, environmental, open space, operations and maintenance, and implementation concerns within the Sand Creek basin, the following concepts were identified as having sufficient feasibility to warrant further evaluation and review:

Channel Concepts:

Floodplain Preservation Channelization, 10- or 100-year Selective Improvements

Detention: Regional detention systems

Channel Concepts: The channel concepts listed above have been evaluated with respect to the parameters listed in the previous chapter. A concept's feasibility depends upon its impact, positive or negative, upon the evaluation parameters. The floodplain preservation concept would involve the regulation of the floodplain preservation concept would involve the regulation of the floodplain limits, generally as depicted on the effective City of Colorado Springs and El Paso County Flood Insurance Rate Maps. Regulation of the floodplain so that future encroachments are minimized and the floodprooffing of structures which are currently within the 100-year floodplain would presumably be the methods used to address the flood hazard concerns along Sand Creek. In the upper reaches of Sand Creek, the ownership or easements associated with the 100-year floodplain (or greater limits to allow for an erosion buffer zone) would be a primary issue in regards to implementation of such a concept. Detention in the upper reaches of the basin Sand Creek basin and in the East Fork Sand Creek basin will maintain the 100-year floodplain at existing limits within the lower reaches of Sand Creek. The "do-nothing" concept is feasible wherever

the existing drainageway improvements are of adequate capacity to convey flood flows. Channelization would involve the lining of the Creek into a more confined flow area, and could be done for either the 100-year or 10-year flood discharges. Several typical channel concepts have been presented. The primary bank lining material would probably be riprap. Grade control and/or drop structures would be required in a channelization concept so that the flood velocities could be controlled to a level requiring medium to heavy riprap. Soil cement offers an alternative to riprap and concrete for the construction of drops or grade control structures. Revegetation would occur wherever the native vegetation was disturbed by the channel construction. Willows at the toe of the riprap banks would be a minimum replacement. Selective linings would involve the construction of grade controls, drop structures, bank linings, storm sewer outlet control structures selectively sited to resist stream erosion or to reduce potential flooding damages. Areas of future concern such as at the outside bends of the creek, or at the outlets of bridges or culverts which will cross the drainageway would be subject to selective improvements.

versus regional detention. During the evaluation process, it was determined that the onsite detention concept has a low feasibility relative to a regional concept. This is because, (1) onsite detention has a unpredictable impact upon lowering peak discharges from urbanized areas to historic conditions (reference, Urbonas and Glidden, "Effect of Detention on Flows in Major Drainageways" ASCE Water Forum '81, 1981), (2) an onsite concept has little impact upon maintaining or enhancing water quality, (3) the number of onsite detention basins, their locations and size cannot be accurately determined in the undeveloped portions of the basin at this time, and (4) onsite detention would present a substantial maintenance responsibility to the jurisdictions involved. For these reasons the onsite detention concept was eliminated and regional detention basin concepts were developed. In the analysis of the channel concepts, regional detention facilities were assumed to be in place.

# Channel Alternatives

Presented on Table VI-1 is a marrix of channel alternatives which were evaluated. All reaches of Sand Creek and the East Fork of Sand Creek had at least three alternatives analyzed. Presented on Tables VI-2 through VI-6 are comparative evaluations of the floodplain preservation (do-nothing), channelization and selective lining concepts, for the mainstem Sand Creek basin, by reach. The purpose of the evaluation process was to identify the relative advantages and disadvantages of each concept within each reach.

100-year peak discharge to levels. This will allow for the channel improvements to be constructed within the existing right-of way.

Reaches SC-5 and SC-6: A selective channel improvement concept has been recommended for these reaches. Detention in Reach SC-8 of the basin will maintain flows to historic peak discharge levels, however the low flows will increase in frequency and volume. For this reason it has been recommended to provide riprap channel linings at selective locations to at least the 10-year water surface and install grade controls. This will prevent the long-term degradation of the invert. A residual 100-year floodplain will remain and will offer opportunities for habitat replacement and open space preservation. Land adjacent to the drainageway is currently undeveloped or unplatted at this time which makes the feasibility of implementing this concept greater in comparison to the urbanized reaches of the creek.

Reaches SC-7 and SC-8: A selective improvement concept involving the localized lining of channel banks and grade control construction has been recommended for these reaches. The feasibility of this concept stems from the fact that flows will be treduced because of detention. Numerous individual rural ownerships cross the drainageway, however no habitable structures lie within the 100-year floodplain. Because of this, the economic feasibility of channelization concepts is low. Non-structural measures can be used to limit encroachments into floodprone areas. Additionally, the City of Colorado Springs Comprehensive plan recommends that the floodplains be maintained as open space. Potential habitat disturbances can be avoided with a selective plan, or simply replaced as part of the particular construction activity which caused the disturbance.

Reach SC-9: A floodplain preservation concept has been recommended for this reach. Little increase in urbanization is anticipated in this reach, and for this reason the existing drainageway is expected to remain stable. Localized improvements may be necessary to limit erosion caused by flow concentrations at culverts or storm sewers. Private ownership of the drainageway is anticipated to continue which lower the feasibility of channel concepts which require permanent right-of-ways or easements for construction and maintenance.

Reaches WF-1 through WF-3: A 100-year channel concept has been recommended for these reaches primarily because of the potential for flooding damages. Several roadway crossings are in need of replacement because of the flood hazard the constrictions create. Some open space enhancement potential exists for this concept since these reaches have been degraded visually by debris accumulation, bank sloughing and sedimentation. Little opportunity exists for widening the drainageway because the

# Development of the Recommended Plan

Presented on Table VI-7 is a matrix representing the recommended plan for each major drainageway reach. The selection of a recommended channel treatment scheme has been based upon the qualitative and quantitative information presented in the Sand Creek Drainage Basin Planning Study Development of Alternatives report and the draft East Fork Sand Creek Drainage Basin Planning Study. Contained within the Technical Addendum to the Sand Creek Drainage Basin Planning Study Development of Alternatives report, is the alternative hydrologic, hydraulic and conceptual cost data used in the evaluation and comparison of each of the alternatives within the mainstem Sand Creek basin.

# Discussion of Recommended Plan

The recommendation of a particular channel treatment or detention scheme has been based upon the qualitative and quantitative data presented. For each reach the flood hazard, environmental, cost, operations and maintenance and open space aspects of the drainageway were weighed for each alternative concept.

Reach SC-I: For this reach a 10-year channel section was recommended for further evaluation. With the implementation of regional detention in the upper basin, the 100-year floodplain will generally be confined within the existing banks, excepting at roadway crossings lacking 100-year capacity. It is recommended that a 10-year low flow channel be constructed within the invert of the existing channel through the construction of benches and sand bars. As urbanization continues towards the full development scenario, the base flow and annual flows will increase in volume and frequency. For this reason, the low flow area must be stabilized to protect the existing channel banks from undermining and subsequent bank sloughing. The benched areas offer an opportunity for habitat replacement and enhancement. At some locations within this reach, a residual 100-year floodplain will remain which will have to be regulated. The residual 100-year floodplain offers some potential for open space preservation and enhancement. This is particularly true in the portion of the reach downstream of Hancock Expressway.

Reaches SC-2 through SC-4: A 100-year channel concept has been recommended primarily because of the potential for flooding damages which exists in these reaches. Habitat disturbed by the construction of channel linings and grade control structures could be replaced along the channel toes and on the overbanks. The replacement of the Waynoka Road crossing will reduce the potential for flood damages in areas adjacent to these roadways. The detention within the upper reaches will limit the

The results of the preliminary design analysis are summarized in this section. The alternative improvements have been quantitatively and qualitatively evaluated, and presented to the City of Colorado Springs and other interested agencies and individuals. Field review of specific areas of concern have been conducted in order to refine the channel treatments suggested for use along Sand Creek, East Fork Sand Creek and their major tributaries. The preliminary plan for the recommended alternative is shown on the drawings contained at the rear of this report.

### Criteria

The City of Colorado Springs, El Paso County Drainage Criteria Manual was used in the development of the typical sections and plans for the major drainageways within the Basin. The City/County manual was supplemented by various criteria manuals with more specific application. These were:

- "Design Guidelines and Criteria for Channels and Hydraulic Structures on Sandy Soils," prepared by Simons, Li & Associates, Inc., 1981.
- Urban Storm Drainage Criteria Manual, Volumes I, II, and III, prepared by the Urban Drainage and Flood Control District.

Various design plans for roadway and channel improvement projects, either proposed or already constructed were reviewed in order to prepare the preliminary design plans. Specifically, the project design plans for the Las Vegas Street and Galley Road bridge replacement projects were reviewed and the improvements incorporated in the preliminary design. The proposed Sand Creek Stabilization Project, AT&SF Railroad to Hancock Expressway and the proposed Sand Creek Stabilization Project at Fountain Boulevard design plans have been reviewed and incorporated into the preliminary design plan and profiles.

# Ivdrology

Presented on Table VII-1 is selected hydrologic data to be used for the sizing of major drainageway improvements within the Basin. Peak flow rates for the 10- and 100-year frequency incorporating and the selected detention alternatives for the Sand Creek and East Fork Sand Creek Basin are summarized for key points along the major drainageways.

Contained within the The technical addenda of this report contains a complete listing of peak discharges for all the sub-basins, stream segments and design points shown on Exhibit 1.

The sizing the drainageway improvements for the tributaries will need to be verified during the final design and layout of the proposed drainageway facilities. Land development activities may alter the location of design points along the tributaries, and therefore slight alteration in a sub-basin's length, slope and area may occur. The methods outlined in the City/County Drainage Criteria Manual should be applied during final design analysis. The rational method should be used to check the peak flow rates for all tributary drainageways and storm sewers draining areas less than 100 acres in size.

### hannels

The recommended channel sections for each reach of drainageway has been outlined in Section VI of this report. In general, the banks of Sand Creek channel, from the confluence with Fountain Creek to the proposed Sand Creek Detention Basin No. 2 are to be lined, or in some cases relined, with riprap to either a 10-year or 100-year flow depth, as shown on the preliminary design plans. Above the Sand Creek Detention Basin No. 2, selectively located riprap bank protection, such as at outside bends, at bridge or culvert outlets, and at confluences with side tributaries have been recommended. In conjunction with the selective improvement measures, and the 10-year low flow concept, the 100-year floodplain should be preserved and regulated. Wherever existing bank linings were judged to be adequate, no improvements have been recommended at this time.

For the West Fork Sand Creek, 100-year riprap bank linings have been recommended in order to address the 100-year flooding hazard which exists at numerous locations along the West Fork. The final design improvements shown in the Palmer Park Bridge Replacement project drawings have been incorporated into the preliminary design plans. In the uppermost reaches of the West Fork, a short segment of rectangular concrete channel has been recommended because of right-of-way constraints.

For the Center Tributary of Sand Creek, 100-year riprap lined channels have been recommended from the confluence with East Fork to Platte Avenue. Above Platte Avenue, the existing concrete channels have adequate capacity except where the drainageway channel has yet to be improved. The final design plans for the US 24 Bypass Project, Phase II have been incorporated into the plans. As part of the bypass construction, it is proposed to line the Center Tributary using riprap. The location of the proposed roadway, new crossings, drops and channel as shown on the Phase II Bypass plans have been reflected on the preliminary design drawings.

For the East Fork Sand Creek drainageway, riprap lined channel banks have been recommended for the majority of the reaches. This is mainly because of the high level of development predicted for the basin in the area known as the Banning-Lewis Ranch development. Open space to accommodate the 100-year floodplains should be allowed for as the East Fork Sand Creek drainageways develop. This is consistent with the Banning-Lewis Ranch master development plan which was approved at the time of annexation of this property. Above Woodmen Road, selective channel lining improvements and grade control structures have been recommended.

For the most part the side tributaries have been recommended to be lined with riprap, however there are some locations in the upper basin which have been proposed to be grasslined. The location of the side drainageways should be considered approximate and may very likely be modified in the future because of land development.

The primary criteria used when sizing the proposed channel sections has been velocity. For all riprap lined channels, the average design velocity should be no greater than 9 feet per second. This criteria allows for the use of Type H riprap within the main flow area of the drainageway. For the case of a 10-year channel with an overall floodplain section, limiting the main channel velocity to 9 feet per second will result in overbank velocities in the five feet per second range. At this level of overbank velocity, native vegetation will be able to withstand the crosive forces which might result in a 100-year flow event. Velocities approaching 10 feet per second could occur at constrictions such as at roadway crossings and at culvert outlets.

# Drop Structures and Check Structures

Drop and check structures have been sited along Sand Creek in order to slow the channel velocity to the recommended 7 feet per second, and to prevent localized and long-term stream degradation from affecting channel linings and overbanks. In the reaches to be selectively lined, drops and check structures will protect the native vegetation from the detrimental effects of stream invert headcutting. Several types of structures could be considered for the Sand Creek Basin. For channel bottom widths in excess of fifty feet, soil cement or sheet piling drops/checks are feasible. For channels narrower than this, reinforced concrete structures are probably the best alternative. A maximum drop height of three feet is recommended. The methodology recommended for use when designing vertical structures is contained with Volume II of the Urban Storm Drainage Criteria Manual.

# Detention

The recommended plan calls for the construction of six regional detention basins within the Sand Creek basin, and six regional basins within the East Fork Sand Creek basin. The

purpose of the Sand Creek detention basins is to limit peak discharges at Powers Boulevard to existing development condition levels. The detention basins in the upper portions of the Sand Creek basin will keep the majority of the existing channel sections and bridges below Powers Boulevard with adequate flow capacity in the future development condition. The detention basins within the East Fork Sand Creek basin have been sized to maintain the flow outfalling from the Banning-Lewis Ranch property at existing levels. This in turn will help to reduce flow to the mainstern of Sand Creek basin have been designed to accommodate the 100-year future condition volume without overtopping the overflow spillway. Sand Creek Basin Nos. 2 and 6, and East Fork Sand Creek Basin Nos. 1, 2, and 3 will be classified as jurisdictional structures, and their design and operation would be subject to State Engineer's office criteria. Sand Creek basins number 1 and 3 should be designed so as to take advantage of the adjacent roadway embankments, and therefore classifying as incidental storage and not subject State Engineer's regulations.


At Stetson Hills Boulevard, the roadway embankment has created a 2 acre open water wetland which was identified during the environmental review of the basin. It is recommended that this wetland be preserved. Accordingly, an outlet control structure will have to be constructed to pass the 100-year discharge to the downstream channel without overtopping the roadway. No floodwater storage or routing has been accounted for in the hydrology modelling at this roadway for the selected detention plan.

For the East Fork Sand Creek detention basin numbers 2, and 3, the existing embankment and outlet structure act to maintain a permanent pool at this time. It is recommended that the design of these detention basins be directed at maintaining the permanent pool when the flood control storage is to be added. The existence of a permanent pool may enhance the water quality aspects of these basins, and offer the opportunity of open space development conducive with open water.


# Water Quality

Improvement of urban stormwater quality has become and important issue in drainage basin planning. Many pollutants are naturally associated with sediments that enter sensitive receiving waters. The pollutants are naturally occurring compounds that are carried to the drainageways in storm runoff. Other pollutants are the result of urbanization such as lawn chemicals, oil and grease, pet feces, lawn clippings and other items. Many pollutants can be limited by programs such as erosion control at construction sites, educational programs to inform the public as to the proper use of lawn chemicals, oil recycling programs and street sweeping programs. Even with these programs in place, erosion along the drainageways can generate large quantities of sediment that can settle out along the downstream channel bottoms.

8061.30608 Typical Channel Sections Colorado Springa, Colorado **CS-3** 419 W. Bijou Street BASIN PLANNING STUDY Kiowa Engineering Corporation Existing Vegetation to be Preserved and/or Replaced 18-inch Thick Type L Buried Riprap Toe Protection Floodplain Width varies 100-year W.S. Regulate Existing Floodplain & Limit Encroachments 2-foot Thick Type M Riprap with 12-inches of Native Sand Bedding at Outside Bends Natural Slope

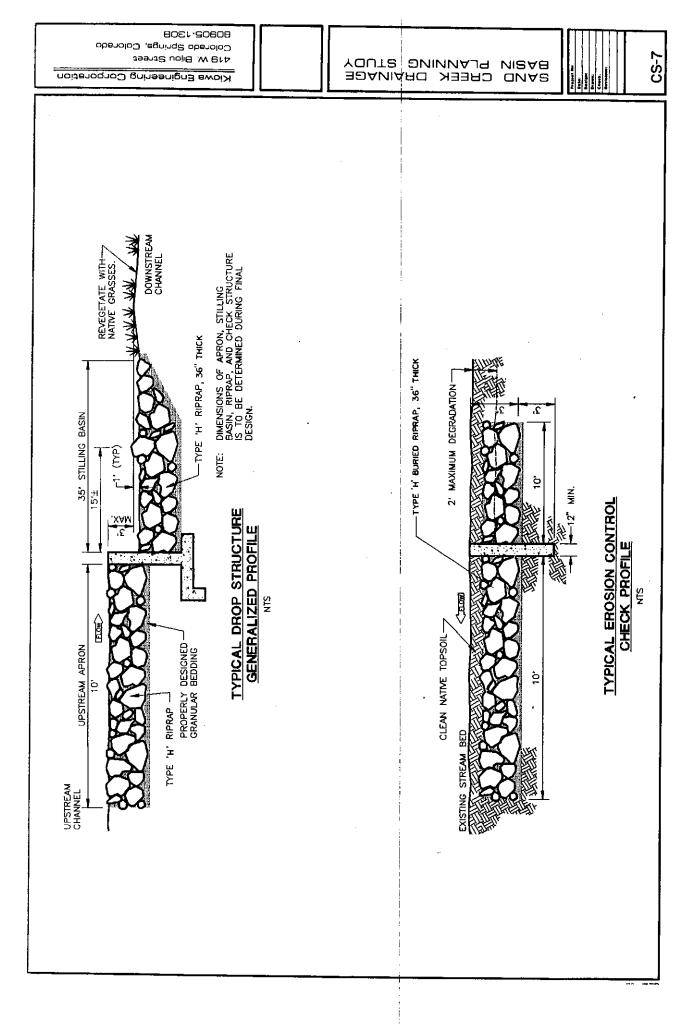


Hydraulic Structures Chapter 9

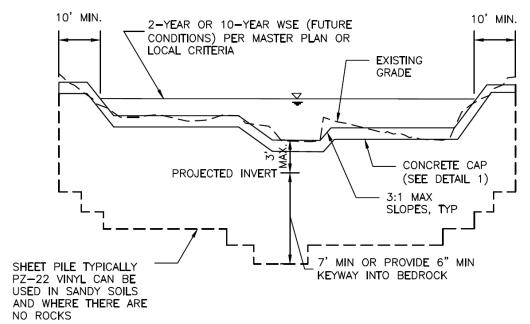

NOTE: THE STRUCTURE MAY BE COVERED WITH 6" OF SOIL OUTSIDE OF THE LOW FLOW AREA.

### SHEET PILE CHECK

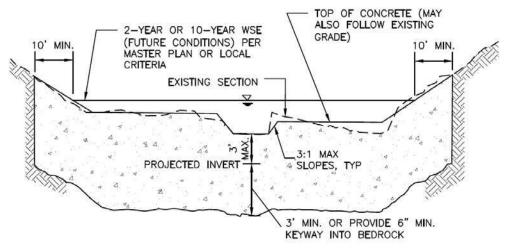

NOTES: 1. TRENCH IN UNDISTURBED SOIL. FORM TOP 6" OF CHECK. DO NOT OVER EXCAVATE TO FORM WALLS OR CONSTRUCT A FOOTING.

2. THE STRUCTURE MAY BE COVERED WITH 6" OF SOIL OUTSIDE OF THE LOW FLOW AREA.

3. VIBRATE CONCRETE INTO TRENCH.



Figure 9-27. Check structure details (Part 2 of 3)

Chapter 9 Hydraulic Structures

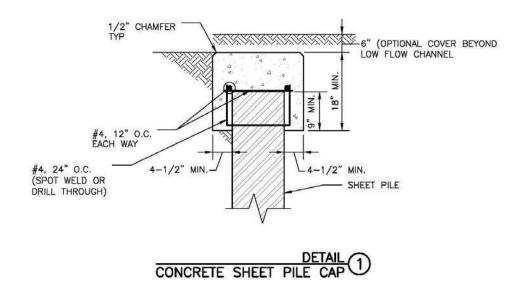


Figure 9-28. Check structure details (Part 3 of 3)

#### HYDROLOGIC CALCULATIONS



For Colorado Springs and much of the Fountain Creek watershed, the 1-hour depths are fairly uniform and are summarized in Table 6-2. Depending on the location of the project, rainfall depths may be calculated using the described method and the NOAA Atlas maps shown in Figures 6-6 through 6-17.

| Return | 1-Hour | 6-Hour | 24-Hour |
|--------|--------|--------|---------|
| Period | Depth  | Depth  | Depth   |
| 2      | 1.19   | 1.70   | 2.10    |
| 5      | 1.50   | 2.10   | 2.70    |
| 10     | 1.75   | 2.40   | 3.20    |
| 25     | 2.00   | 2.90   | 3.60    |
| 50     | 2.25   | 3.20   | 4.20    |
| 100    | 2.52   | 3.50   | 4.60    |

Table 6-2. Rainfall Depths for Colorado Springs

Where Z = 6.840 ft/100

These depths can be applied to the design storms or converted to intensities (inches/hour) for the Rational Method as described below. However, as the basin area increases, it is unlikely that the reported point rainfalls will occur uniformly over the entire basin. To account for this characteristic of rain storms an adjustment factor, the Depth Area Reduction Factor (DARF) is applied. This adjustment to rainfall depth and its effect on design storms is also described below. The UDFCD UD-Rain spreadsheet, available on UDFCD's website, also provides tools to calculate point rainfall depths and Intensity-Duration-Frequency curves<sup>2</sup> and should produce similar depth calculation results.

#### 2.2 Design Storms

Design storms are used as input into rainfall/runoff models and provide a representation of the typical temporal distribution of rainfall events when the creation or routing of runoff hydrographs is required. It has long been observed that rainstorms in the Front Range of Colorado tend to occur as either short-duration, high-intensity, localized, convective thunderstorms (cloud bursts) or longer-duration, lower-intensity, broader, frontal (general) storms. The significance of these two types of events is primarily determined by the size of the drainage basin being studied. Thunderstorms can create high rates of runoff within a relatively small area, quickly, but their influence may not be significant very far downstream. Frontal storms may not create high rates of runoff within smaller drainage basins due to their lower intensity, but tend to produce larger flood flows that can be hazardous over a broader area and extend further downstream.

■ Thunderstorms: Based on the extensive evaluation of rain storms completed in the Carlton study (Carlton 2011), it was determined that typical thunderstorms have a duration of about 2 hours. The study evaluated over 300,000 storm cells using gage-adjusted NEXRAD data, collected over a 14-year period (1994 to 2008). Storms lasting longer than 3 hours were rarely found. Therefore, the results of the Carlton study have been used to define the shorter duration design storms.

To determine the temporal distribution of thunderstorms, 22 gage-adjusted NEXRAD storm cells were studied in detail. Through a process described in a technical memorandum prepared by the City of Colorado Springs (City of Colorado Springs 2012), the results of this analysis were interpreted and normalized to the 1-hour rainfall depth to create the distribution shown in Table 6-3 with a 5 minute time interval for drainage basins up to 1 square mile in size. This distribution represents the rainfall

Table 6-6. Runoff Coefficients for Rational Method

(Source: UDFCD 2001)

| Land Use or Surface                               | Percent                                        |         |         |         |         |         | Runoff Co | efficients |         |         |         |         |          |
|---------------------------------------------------|------------------------------------------------|---------|---------|---------|---------|---------|-----------|------------|---------|---------|---------|---------|----------|
| Characteristics                                   | Impervious                                     | 2-у     | ear     | 5-y     | ear     | 10-1    | /ear      | 25-        | year    | 50-1    | /ear    | 100-    | γear     |
|                                                   |                                                | HSG A&B | HSG C&D | HSG A&B | HSG C&D | HSG A&B | HSG C&D   | HSG A&B    | HSG C&D | HSG A&B | HSG C&D | HSG A&B | HSG C&D  |
| Business                                          |                                                |         |         |         |         |         |           |            |         |         |         |         | 1100 000 |
| Commercial Areas                                  | 95                                             | 0.79    | 0.80    | 0.81    | 0.82    | 0.83    | 0.84      | 0.85       | 0.87    | 0.87    | 0.88    | 0.88    | 0.89     |
| Neighborhood Areas                                | 70                                             | 0.45    | 0.49    | 0.49    | 0.53    | 0.53    | 0.57      | 0.58       | 0.62    | 0.60    | 0.65    | 0.62    | 0.68     |
| Residential                                       |                                                |         |         | _       |         |         |           |            |         |         |         |         |          |
| 1/8 Acre or less                                  | 65                                             | 0.41    | 0.45    | 0.45    | 0.49    | 0.49    | 0.54      | 0.54       | 0.59    | 0.57    | 0.62    | 0.59    | 0.65     |
| 1/4 Acre                                          | 40                                             | 0.23    | 0.28    | 0.30    | 0.35    | 0.36    | 0.42      | 0.42       | 0.50    | 0.46    | 0.54    | 0.50    | 0.58     |
| 1/3 Acre                                          | 30                                             | 0.18    | 0.22    | 0.25    | 0.30    | 0.32    | 0.38      | 0.39       | D.47    | 0.43    | 0.52    | 0.47    | 0.57     |
| 1/2 Acre                                          | 25                                             | 0.15    | 0.20    | 0.22    | 0.28    | 0.30    | 0.36      | 0.37       | 0:46    | 0.41    | 0.51    | 0.46    | 0.56     |
| 1 Acre                                            | 20                                             | 0.12    | 0.17    | 0.20    | 0.26    | 0.27    | 0.34      | 0.35       | 0.44    | 0.40    | 0.50    | 0.44    | 0.55     |
| Industrial                                        | <del> </del>                                   |         |         |         | _       |         |           |            |         |         |         | -       |          |
| Light Areas                                       | 80                                             | 0.57    | 0.60    | 0.59    | 0.63    | 0.63    | 0.66      | 0.66       | 0.70    | 0.68    | 0.72    | 0.70    | 0.74     |
| Heavy Areas                                       | 90                                             | 0.71    | 0.73    | 0.73    | 0.75    | 0.75    | 0.77      | 0.78       | 0.80    | 0.80    | 0.82    | 0.81    | 0.83     |
|                                                   |                                                |         |         |         |         |         |           |            |         |         |         |         |          |
| Parks and Cemeteries                              | 7                                              | 0.05    | 0.09    | 0.12    | 0.19    | 0.20    | 0.29      | 0.30       | 0.40    | 0.34    | 0.46    | 0.39    | 0.52     |
| Playgrounds                                       | 13                                             | 0.07    | 0.13    | 0.16    | 0.23    | 0.24    | 0.31      | 0.32       | 0.42    | 0.37    | D.48    | 0.41    | 0.54     |
| Railroad Yard Areas                               | 40                                             | 0.23    | 0.28    | 0.30    | 0.35    | 0.36    | 0.42      | 0.42       | 0.50    | 0.46    | 0.54    | 0.50    | 0.58     |
| Undeveloped Areas                                 |                                                |         |         | -       | _       |         |           |            |         |         |         |         |          |
| Historic Flow Analysis<br>Greenbelts, Agriculture | 2                                              | 0.03    | 0.05    | 0.09    | 0.16    | 0.17    | 0.26      | 0.26       | 0.38    | 0.31    | 0.45    | 0.36    | 0.51     |
| Pasture/Meadow                                    | 0                                              | 0.02    | 0.04    | 0.08    | 0.15    | 0.15    | 0.25      | 0.25       | 0.37    | 0.30    | 0.44    | 0.35    | 0.50     |
| Forest                                            | 0                                              | 0.02    | 0.04    | 0.08    | 0.15    | 0.15    | 0.25      | 0.25       | 0.37    | 0.30    | 0.44    | 0.35    | 0.50     |
| Exposed Rock                                      | 100                                            | 0.89    | 0.89    | 0.90    | 0.90    | 0.92    | 0.92      | 0.94       | 0.94    | 0.95    | 0.95    | 0.96    | 0.96     |
| Offsite Flow Analysis (when                       | i –                                            | - 1     |         |         |         |         | 0.52      | 0.5+       | 0.57    | 0.55    | 0.55    | 0.50    | 0.50     |
| landuse is undefined)                             | 45                                             | 0.26    | 0.31    | 0.32    | 0.37    | 0.38    | 0.44      | 0.44       | 0.51    | 0.48    | 0.55    | 0.51    | 0.59     |
|                                                   | <u>                                       </u> |         |         |         |         |         |           |            |         |         |         |         |          |
| Streets                                           | ļi                                             |         | _       |         |         |         |           |            |         |         | '`]     |         |          |
| Paved                                             | 100                                            | 0.89    | 0.89    | 0.90    | D.90    | 0.92    | 0.92      | 0.94       | 0.94    | 0.95    | 0.95    | 0.96    | 0.96     |
| Gravel                                            | 80                                             | 0.57    | 0.60    | 0.59    | 0.63    | 0.63    | 0.66      | 0.66       | 0.70    | 0.68    | 0.72    | 0.70    | 0.74     |
| Drive and Walks                                   | 100                                            | 0.89    | 0.89    | 0.90    | 0.90    | 0.92    | 0.92      | 0.94       | 0.94    | 0.95    | 0.95    | 0.96    | 0.96     |
| Roofs                                             | 90                                             | 0.71    | 0.73    | 0.73    | 0.75    | 0.75    | 0.77      | 0.78       | 0.80    | 0.80    | 0.82    | 0.81    | 0.83     |
| Lawns                                             | 0                                              | 0.02    | 0.04    | 0.08    | 0.15    | 0.15    | 0.25      | 0.25       | 0.37    | 0.30    | 0.44    | 0.35    | 0.50     |

#### 3.2 Time of Concentration

One of the basic assumptions underlying the Rational Method is that runoff is a function of the average rainfall rate during the time required for water to flow from the hydraulically most remote part of the drainage area under consideration to the design point. However, in practice, the time of concentration can be an empirical value that results in reasonable and acceptable peak flow calculations.

For urban areas, the time of concentration  $(t_c)$  consists of an initial time or overland flow time  $(t_i)$  plus the travel time  $(t_i)$  in the storm sewer, paved gutter, roadside drainage ditch, or drainage channel. For non-urban areas, the time of concentration consists of an overland flow time  $(t_i)$  plus the time of travel in a concentrated form, such as a swale or drainageway. The travel portion  $(t_i)$  of the time of concentration can be estimated from the hydraulic properties of the storm sewer, gutter, swale, ditch, or drainageway. Initial time, on the other hand, will vary with surface slope, depression storage, surface cover, antecedent rainfall, and infiltration capacity of the soil, as well as distance of surface flow. The time of concentration is represented by Equation 6-7 for both urban and non-urban areas.

Table 6-10. NRCS Curve Numbers for Frontal Storms & Thunderstorms for Developed Conditions (ARCII)

|                                                                    |                        | Hydrologic              | .   |          | Pre-Devel | opment CN | <u> </u> |
|--------------------------------------------------------------------|------------------------|-------------------------|-----|----------|-----------|-----------|----------|
| Fully Developed Urban Areas (vegetation established) <sup>1</sup>  | Treatment              | Condition               | % I | HSG A    | HSG B     | HSG C     | HSG D    |
| Open space (lawns, parks, golf courses, cemeteries, etc.):         |                        |                         |     |          |           |           |          |
| Poor condition (grass cover < 50%)                                 |                        |                         |     | 68       | 79        | 86        | 89       |
| Fair condition (grass cover 50% to 75%)                            |                        |                         |     | 49       | 69        | 79        | 84       |
| Good condition (grass cover > 75%)                                 |                        |                         |     | 39       | 61        | 74        | 80       |
| Impervious areas:                                                  |                        |                         |     |          |           |           |          |
| Paved parking lots, roofs, driveways, etc. (excluding right-of-way |                        |                         |     | 98       | 98        | 98        | 98       |
| Streets and roads:                                                 |                        |                         |     |          |           |           |          |
| Paved; curbs and storm sewers (excluding right-of-way)             |                        |                         |     | 98       | 98        | 98        | 98       |
| Paved; open ditches (Including right-of-way)                       |                        |                         |     | 83       | 89        | 92        | 93       |
| Gravel (Including right-of-way)                                    |                        |                         |     | 76       | 85        | 89        | 91       |
| Dirt (including right-of-way)                                      |                        |                         |     | 72       | 82        | 87        | 89       |
| Western desert urban areas:                                        |                        |                         |     |          |           |           |          |
| Natural desert landscaping (pervious areas only)                   |                        |                         |     | 63       | 77        | 85        | 88       |
| Artificial desert landscaping (impervious weed barrier, desert     |                        |                         |     | 96       | 96        | 96        | 96       |
| shrub with 1- to 2-inch sand or gravel mulch and basin borders)    |                        |                         |     |          |           |           |          |
| Urban districts:                                                   |                        |                         | 0   |          |           |           |          |
| Commercial and business                                            |                        |                         | 85  | 89       | 92        | 94        | 95       |
| Industrial                                                         |                        |                         | 72  | 81       | 88        | 91        | 93       |
| Residential districts by average lot size:                         |                        |                         |     |          |           |           |          |
| 1/8 acre or less (town houses)                                     |                        |                         | 65  | 77       | 85        | 90        | 92       |
| 1/4 acre                                                           |                        |                         | 38  | 61       | 75        | 83        | 87       |
| 1/3 acre                                                           |                        |                         | 30  | 57       | 72        | 81        | 86       |
| 1/2 acre                                                           |                        |                         | 25  | 54       | 70        | 80        | 85       |
| 2 acres                                                            |                        |                         | 20  | 51       | 68        | 79        | 84       |
| Zacies                                                             |                        |                         | 12  | 45       | 65        | 77        | 82       |
| Developing Urban Areas <sup>1</sup>                                | Treatment <sup>2</sup> | Hydrologic              | % I | HSG A    | HSG B     | HSG C     | HSG D    |
|                                                                    |                        | Condition <sup>3</sup>  |     |          |           |           | _        |
| Newly graded areas (pervious areas only, no vegetation)            | *****                  |                         |     | 77       | . 86      | 91        | 94       |
| Cultivated Agricultural Lands <sup>1</sup>                         | Treatment              | Hydrologic<br>Condition | %।  | HSG A    | HSG B     | HSG C     | HSG D    |
|                                                                    | Bare soil              |                         |     | 77       | 86        | 91        | 94       |
| Fallow                                                             | Crop residue           | Poor                    |     | 76       | 85        | 90        | 93       |
|                                                                    | cover (CR)             | Good                    |     | 74       | 83        | 88        | 90       |
|                                                                    | Straight row           | Poor                    |     | 72       | 81        | 88        | 91       |
|                                                                    | (SR)                   | Good                    |     | 67       | 78        | 85        | 89       |
|                                                                    | SR+CR                  | Poor                    |     | 71       | 80        | 87        | 90       |
|                                                                    |                        | Good                    | +   | 64       | 75        | 82        | 85       |
|                                                                    | Contoured (C)          | Poor                    |     | 70       | 79        | 84        | 88       |
| Row crops                                                          | ,,,                    | Good                    |     | 65       | 75        | 82        | 86       |
|                                                                    | C+CR                   | Poor                    |     | 69       | 78        | 83        | 87       |
|                                                                    |                        | Good                    |     | 64       | 74        | 81        | 85       |
|                                                                    | Contoured &            | Poor                    |     | 66       | 74        | 80        | 82       |
|                                                                    | terraced (C&T)         | Good                    |     | 62       | 71        | 78        | 81       |
|                                                                    | C&T+ CR                | Poor                    |     | 65       | 73        | 79        | 81       |
|                                                                    |                        | Good                    |     | 61       | 70        | 77        | 80       |
|                                                                    | SR                     | Poor                    |     | 65       | 76        | 84        | 88       |
|                                                                    |                        | Good                    |     | 63       | 75        | 83        | 87       |
|                                                                    | SR + CR                | Poor                    |     | 64       | 75        | 83        | 86       |
|                                                                    |                        | Good                    |     | 60       | 72        | 80        | 84       |
|                                                                    | С                      | Poor                    |     | 63       | 74        | 82        | 85       |
| Small grain                                                        | -                      | Good                    |     | 61       | 73        | 81        | 84       |
|                                                                    | C + CR Poor            | Poor                    |     | 62       | 73        | 81        | 84       |
|                                                                    |                        | Good                    |     | 60       | 72        | 80        | 83       |
| !                                                                  | C&T                    | Poor                    |     | 61       | 72        | 79        | 82       |
|                                                                    |                        | Good                    |     | 59       | 70        | 78<br>79  | 81       |
|                                                                    | C&T+ CR                | Poor<br>Good            |     | 60<br>58 | 71<br>69  | 78<br>77  | 81<br>80 |
|                                                                    |                        |                         |     |          |           |           |          |

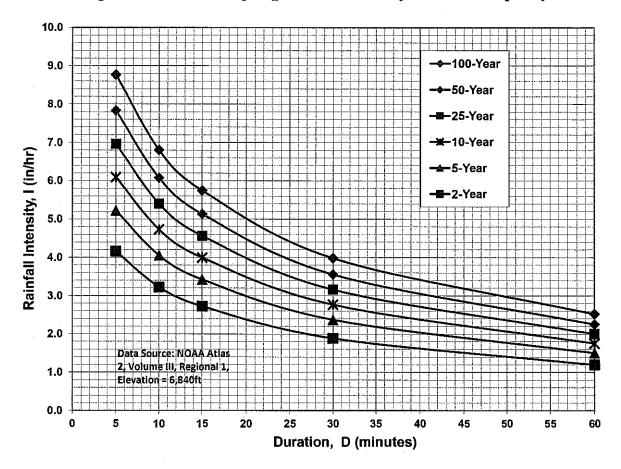


Figure 6-5. Colorado Springs Rainfall Intensity Duration Frequency

**IDF Equations** 

 $I_{100} = -2.52 \ln(D) + 12.735$ 

 $I_{50} = -2.25 \ln(D) + 11.375$ 

 $I_{25} = -2.00 \ln(D) + 10.111$ 

 $I_{10} = -1.75 \ln(D) + 8.847$ 

 $I_5 = -1.50 \ln(D) + 7.583$ 

 $I_2 = -1.19 ln(D) + 6.035$ 

Note: Values calculated by equations may not precisely duplicate values read from figure.

#### **EFFECTIVE IMPERVIOUSNESS - POND 2**

| Basin                 | Acreage | lmp.% |
|-----------------------|---------|-------|
| D1 (Fil. 1 Report)    | 1.1     | 90%   |
| D2 (Fil. 1 Report)    | 2.2     | 60%   |
| H (Fil. 1 Report)     | 2.0     | 25%   |
| OS-3 (Fil. 1 Report)  | 2.5     | 30%   |
| OS-4 (Fil. 1 Report)  | 3.1     | 25%   |
| OS-12 (Fil. 1 Report) | 15.0    | 10%   |
| OS-13 (Fil. 1 Report) | 1.4     | 20%   |
| OS-14 (Fil. 1 Report) | 9.1     | 20%   |
| I (Fil. 1 Report)     | 3.7     | 30%   |
| K (Fil. 1 Report)     | 1.5     | 30%   |
| L (Fil. 1 Report)     | 7.3     | 30%   |
| N (Fil. 1 Report)     | 2.1     | 30%   |
| P (Fil. 1 Report)     | 2.7     | 30%   |
| Q (Fil. 1 Report)     | 2.2     | 10%   |
| OS-4                  | 2.5     | 2%    |
| OS-5                  | 13.7    | 2%    |
| OS-6                  | 1.5     | 2%    |
| OS-8                  | 3.6     | 30%   |
| J                     | 5.9     | 30%   |
| N                     | 0.63    | 30%   |
| 0                     | 2.8     | 30%   |
| P                     | 1.0     | 30%   |
| Q                     | 1.9     | 30%   |
| R                     | 2.7     | 30%   |
| S                     | 6.6     | 30%   |
| T                     | 1.0     | 30%   |
| U                     | 1.5     | 30%   |
| Total                 | 101.2   | 21.7% |

#### **EFFECTIVE IMPERVIOUSNESS - POND 3**

| Basin        | Acreage    | lmp.%          |
|--------------|------------|----------------|
| EX-7         | 27.6       | 7.0%           |
| OS-1<br>OS-2 | 3.9<br>2.9 | 15.1%<br>24.6% |
| A            | 9.5        | 15.2%          |
| В            | 6.0        | 18.9%          |
| С            | 3.3        | 23.0%          |
| D            | 2.3        | 17.9%          |
| E2           | 2.8        | 12.4%          |
| Total        | 58.3       | 12.6%          |

RETREAT AT TIMBERRIDGE FILING NO. 2

JOB NAME: JOB NUMBER: DATE: 1185.20 09/17/21 CALCULATED BY: MAW

#### FINAL DRAINAGE REPORT ~ BASIN RUNOFF COEFFICIENT SUMMARY

|        |                    | IMP          | PERVIOUS A   | REA / STREI  |              | LAN          |      | EVELOPED A   |              | 1012111 001  | WEIGHTED     |              |              | WEIGHTED C   | :A           | <u> </u>                    |
|--------|--------------------|--------------|--------------|--------------|--------------|--------------|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-----------------------------|
| BASIN  | TOTAL<br>AREA (AC) | AREA (AC)    | C(2)         | C(5)         | C(100)       | AREA (AC)    | C(2) | C(5)         | C(100)       | C(2)         | C(5)         | C(100)       | CA(2)        | CA(5)        | CA(100)      | EFFECTIVE<br>IMPERVIOUS (%) |
| EX-1   | 12.7               | 0.00         | 0.89         | 0.90         | 0.96         | 12.7         | 0.05 | 0.12         | 0.39         | 0.03         | 0.09         | 0.36         | 0.38         | 1.14         | 4.57         | 2.0%                        |
| EX-2   | 29.4               | 0.00         | 0.89         | 0.90         | 0.96         | 29.4         | 0.05 | 0.12         | 0.39         | 0.03         | 0.09         | 0.36         | 0.88         | 2.65         | 10.58        | 2.0%                        |
| EX-3   | 9.1                | 0.00         | 0.89         | 0.90         | 0.96         | 9.1          | 0.05 | 0.12         | 0.39         | 0.03         | 0.09         | 0.36         | 0.27         | 0.82         | 3.28         | 2.0%                        |
| EX-4   | 84.9               | 1.50         | 0.57         | 0.59         | 0.70         | 83.4         | 0.05 | 0.12         | 0.39         | 0.03         | 0.09         | 0.36         | 2.55         | 7.64         | 30.56        | 3.4%                        |
| EX-5   | 34.2               | 1.50         | 0.57         | 0.59         | 0.70         | 32.7         | 0.05 | 0.12         | 0.39         | 0.03         | 0.09         | 0.36         | 1.03         | 3.08         | 12.31        | 5.4%                        |
| EX-7   | 27.6               | 0.00         | 0.89         | 0.90         | 0.96         | 27.6         | 0.05 | 0.12         | 0.39         | 0.05         | 0.12         | 0.39         | 1.38         | 3.31         | 10.76        | 7.0%                        |
| OS-1   | 3.9                | 0.20         | 0.89         | 0.90         | 0.96         | 3.7          | 0.06 | 0.14         | 0.40         | 0.10         | 0.18         | 0.43         | 0.40         | 0.70         | 1.67         | 15.1%                       |
| OS-2   | 2.9                | 0.50         | 0.89         | 0.90         | 0.96         | 2.4          | 0.06 | 0.14         | 0.40         | 0.10         | 0.10         | 0.50         | 0.59         | 0.79         | 1.44         | 24.6%                       |
| OS-3   | 0.9                | 0.00         | 0.89         | 0.90         | 0.96         | 0.9          | 0.06 | 0.14         | 0.40         | 0.06         | 0.14         | 0.40         | 0.05         | 0.13         | 0.36         | 11.0%                       |
| OS-4   | 2.5                | 0.00         | 0.89         | 0.90         | 0.96         | 2.5          | 0.03 | 0.09         | 0.36         | 0.03         | 0.09         | 0.36         | 0.08         | 0.23         | 0.90         | 2.0%                        |
| OS-5   | 13.7               | 0.00         | 0.89         | 0.90         | 0.96         | 13.7         | 0.03 | 0.09         | 0.36         | 0.03         | 0.09         | 0.36         | 0.41         | 1.23         | 4.93         | 2.0%                        |
| OS-6   | 1.5                | 0.00         | 0.89         | 0.90         | 0.96         | 1.5          | 0.03 | 0.09         | 0.36         | 0.03         | 0.09         | 0.36         | 0.05         | 0.14         | 0.54         | 2.0%                        |
| OS-7   | 2.6                | 0.00         | 0.89         | 0.90         | 0.96         | 2.6          | 0.03 | 0.09         | 0.36         | 0.03         | 0.09         | 0.36         | 0.08         | 0.23         | 0.94         | 2.0%                        |
| OS-8   | 3.6                | 0.00         | 0.89         | 0.90         | 0.96         | 3.6          | 0.18 | 0.25         | 0.47         | 0.18         | 0.25         | 0.47         | 0.65         | 0.90         | 1.69         | 30.0%                       |
| OS-9   | 0.9                | 0.00         | 0.89         | 0.90         | 0.96         | 0.9          | 0.18 | 0.25         | 0.47         | 0.18         | 0.25         | 0.47         | 0.16         | 0.23         | 0.42         | 30.0%                       |
|        |                    | 2 = 2        |              |              |              |              |      | 2.11         | 2.12         | 0.10         | 2.12         | 2.42         |              |              |              | 4= 00/                      |
| A      | 9.5                | 0.50         | 0.89         | 0.90         | 0.96         | 9.00         | 0.06 | 0.14         | 0.40         | 0.10         | 0.18         | 0.43         | 0.99         | 1.71         | 4.08         | 15.2%                       |
| B      | 6.0                | 0.60<br>0.50 | 0.89         | 0.90         | 0.96<br>0.96 | 5.40<br>2.80 | 0.06 | 0.14         | 0.40<br>0.40 | 0.14         | 0.22         | 0.46<br>0.48 | 0.86         | 1.30         | 2.74<br>1.60 | 18.9%                       |
| C<br>D | 3.3<br>2.3         | 0.50         | 0.89<br>0.89 | 0.90<br>0.90 | 0.96         | 2.80         | 0.06 | 0.14<br>0.14 | 0.40         | 0.19<br>0.13 | 0.26<br>0.21 | 0.48         | 0.61<br>0.30 | 0.84<br>0.47 | 1.00         | 23.0%<br>17.9%              |
| E1     | 7.1                | 0.20         | 0.89         | 0.90         | 0.96         | 6.65         | 0.06 | 0.14         | 0.40         | 0.13         | 0.21         | 0.45         | 0.80         | 1.34         | 3.09         | 16.0%                       |
| E2     | 2.8                | 0.45         | 0.89         | 0.90         | 0.96         | 2.75         | 0.06 | 0.14         | 0.40         | 0.11         | 0.19         | 0.44         | 0.80         | 0.43         | 1.15         | 12.4%                       |
| F F    | 12.2               | 0.00         | 0.89         | 0.90         | 0.96         | 12.20        | 0.04 | 0.14         | 0.40         | 0.07         | 0.10         | 0.38         | 0.49         | 1.22         | 4.64         | 7.2%                        |
| G      | 1.4                | 0.60         | 0.89         | 0.90         | 0.96         | 0.80         | 0.04 | 0.14         | 0.40         | 0.42         | 0.47         | 0.64         | 0.58         | 0.65         | 0.90         | 55.7%                       |
| H1     | 0.5                | 0.15         | 0.89         | 0.90         | 0.96         | 0.37         | 0.15 | 0.22         | 0.46         | 0.36         | 0.42         | 0.60         | 0.19         | 0.22         | 0.31         | 47.3%                       |
| H2     | 0.5                | 0.15         | 0.89         | 0.90         | 0.96         | 0.32         | 0.15 | 0.22         | 0.46         | 0.39         | 0.44         | 0.62         | 0.18         | 0.21         | 0.29         | 49.1%                       |
|        | 0.17               | 0.05         | 0.89         | 0.90         | 0.96         | 0.12         | 0.18 | 0.25         | 0.47         | 0.39         | 0.44         | 0.61         | 0.07         | 0.08         | 0.10         | 47.6%                       |
| J      | 5.90               | 0.70         | 0.89         | 0.90         | 0.96         | 5.20         | 0.18 | 0.25         | 0.47         | 0.26         | 0.33         | 0.53         | 1.56         | 1.93         | 3.12         | 37.1%                       |
| K      | 1.50               | 0.00         | 0.89         | 0.90         | 0.96         | 1.50         | 0.18 | 0.25         | 0.47         | 0.18         | 0.25         | 0.47         | 0.27         | 0.38         | 0.71         | 30.0%                       |
| L      | 0.53               | 0.00         | 0.89         | 0.90         | 0.96         | 0.53         | 0.18 | 0.25         | 0.47         | 0.18         | 0.25         | 0.47         | 0.10         | 0.13         | 0.25         | 30.0%                       |
| М      | 0.81               | 0.20         | 0.89         | 0.90         | 0.96         | 0.61         | 0.18 | 0.25         | 0.47         | 0.36         | 0.41         | 0.59         | 0.29         | 0.33         | 0.48         | 44.8%                       |
| N      | 0.63               | 0.15         | 0.89         | 0.90         | 0.96         | 0.48         | 0.18 | 0.25         | 0.47         | 0.35         | 0.40         | 0.59         | 0.22         | 0.26         | 0.37         | 44.3%                       |
| 0      | 2.80               | 0.25         | 0.89         | 0.90         | 0.96         | 2.55         | 0.18 | 0.25         | 0.47         | 0.24         | 0.31         | 0.51         | 0.68         | 0.86         | 1.44         | 35.4%                       |
| Р      | 1.00               | 0.25         | 0.89         | 0.90         | 0.96         | 0.75         | 0.18 | 0.25         | 0.47         | 0.36         | 0.41         | 0.59         | 0.36         | 0.41         | 0.59         | 45.0%                       |
| Q      | 1.90               | 0.00         | 0.89         | 0.90         | 0.96         | 1.90         | 0.06 | 0.14         | 0.40         | 0.06         | 0.14         | 0.40         | 0.11         | 0.27         | 0.76         | 30.0%                       |
| R      | 2.70               | 0.60         | 0.89         | 0.90         | 0.96         | 2.10         | 0.18 | 0.25         | 0.47         | 0.34         | 0.39         | 0.58         | 0.91         | 1.07         | 1.56         | 43.3%                       |
| S      | 6.60               | 0.90         | 0.89         | 0.90         | 0.96         | 5.70         | 0.18 | 0.25         | 0.47         | 0.28         | 0.34         | 0.54         | 1.83         | 2.24         | 3.54         | 38.2%                       |
| T      | 1.00               | 0.30         | 0.89         | 0.90         | 0.96         | 0.70         | 0.02 | 0.08         | 0.35         | 0.28         | 0.33         | 0.53         | 0.28         | 0.33         | 0.53         | 48.0%                       |
| U      | 1.50               | 0.00         | 0.89         | 0.90         | 0.96         | 1.50         | 0.18 | 0.25         | 0.47         | 0.18         | 0.25         | 0.47         | 0.27         | 0.38         | 0.71         | 30.0%                       |
| V      | 2.10               | 0.00         | 0.89         | 0.90         | 0.96         | 2.10         | 0.18 | 0.25         | 0.47         | 0.18         | 0.25         | 0.47         | 0.38         | 0.53         | 0.99         | 30.0%                       |
| W      | 1.40               | 0.15         | 0.89         | 0.90         | 0.96         | 1.25         | 0.18 | 0.25         | 0.47         | 0.26         | 0.32         | 0.52         | 0.36         | 0.45         | 0.73         | 36.4%                       |

JOB NUMBER: 1185.20

DATE: 02/02/22
CALC'D BY: MAW

 $t_i = \frac{0.395(1.1 - C_5)\sqrt{L}}{S^{0.33}}$   $V = C_v S_w^{0.5}$  Tc=L/V

Table 6-7. Conveyance Coefficient, Cv

| Type of Land Surface                              | C,  |
|---------------------------------------------------|-----|
| Heavy meadow                                      | 2.5 |
| Tillage/field L                                   | 5   |
| Riprap (not buried)* $I_c = \frac{180}{180} + 10$ | 6.5 |
| Short pasture and lawns                           | 7   |
| Nearly bare ground                                | 10  |
| Grassed waterway                                  | 15  |
| Paved areas and shallow paved swales              | 20  |

For buried riprap, select C<sub>v</sub> value based on type of vegetative cover.

# FINAL DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

|       |       | WEIGHTE | )       |      | OVER        | LAND        |             | STRE           | ET / Ch      | IANNEL            | FLOW        | Tc             | STREET / CHANNEL FLOW   Tc   INTENSITY   TOTAL F |                 |                   | ТОТ           | AL FLO        | ows             |
|-------|-------|---------|---------|------|-------------|-------------|-------------|----------------|--------------|-------------------|-------------|----------------|--------------------------------------------------|-----------------|-------------------|---------------|---------------|-----------------|
| BASIN | CA(2) | CA(5)   | CA(100) | C(5) | Length (ft) | Height (ft) | Tc<br>(min) | Length<br>(ft) | Slope<br>(%) | Velocity<br>(fps) | Tc<br>(min) | TOTAL<br>(min) | l(2)<br>(in/hr)                                  | l(5)<br>(in/hr) | l(100)<br>(in/hr) | Q(2)<br>(cfs) | Q(5)<br>(cfs) | Q(100)<br>(cfs) |
| EX-1  | 0.38  | 1.14    | 4.57    | 0.12 | 300         | 10          | 20.6        | 1000           | 2.0%         | 1.4               | 11.8        | 32.4           | 1.90                                             | 2.37            | 3.97              | 1             | 3             | 18              |
| EX-2  | 0.88  | 2.65    | 10.58   | 0.12 | 300         | 10          | 20.6        | 800            | 2.0%         | 1.4               | 9.4         | 30.0           | 1.99                                             | 2.48            | 4.16              | 2             | 7             | 44              |
| EX-3  | 0.27  | 0.82    | 3.28    | 0.12 | 300         | 9           | 21.3        | 200            | 2.0%         | 1.4               | 2.4         | 23.7           | 2.27                                             | 2.84            | 4.76              | 1             | 2             | 16              |
| EX-4  | 2.55  | 7.64    | 30.56   | 0.12 | 300         | 12          | 19.4        | 2500           | 2.0%         | 1.4               | 29.5        | 48.9           | 1.41                                             | 1.75            | 2.93              | 4             | 13            | 90              |
| EX-5  | 1.03  | 3.08    | 12.31   | 0.12 | 300         | 12          | 19.4        | 1200           | 3.0%         | 1.7               | 11.5        | 30.9           | 1.95                                             | 2.43            | 4.09              | 2             | 7             | 50              |
| EX-7  | 1.38  | 3.31    | 10.76   | 0.12 | 300         | 12          | 19.4        | 1500           | 2.0%         | 1.0               | 25.3        | 44.6           | 1.51                                             | 1.88            | 3.16              | 2             | 6             | 34              |
|       |       |         |         |      |             |             |             |                |              |                   |             |                |                                                  |                 |                   |               |               |                 |
| OS-1  | 0.40  | 0.70    | 1.67    | 0.14 | 300         | 10.5        | 19.9        |                |              |                   |             | 19.9           | 2.48                                             | 3.10            | 5.20              | 1             | 2             | 9               |
| OS-2  | 0.59  | 0.79    | 1.44    | 0.14 | 300         | 8           | 21.7        | 100            | 2.0%         | 1.4               | 1.2         | 22.9           | 2.31                                             | 2.89            | 4.84              | 1             | 2             | 7               |
| OS-3  | 0.05  | 0.13    | 0.36    | 0.14 | 300         | 12          | 19.0        |                |              |                   |             | 19.0           | 2.53                                             | 3.17            | 5.32              | 0.1           | 0.4           | 2               |
| OS-4  | 0.08  | 0.23    | 0.90    | 0.09 | 300         | 12          | 20.0        |                |              |                   |             | 20.0           | 2.47                                             | 3.09            | 5.19              | 0.2           | 0.7           | 5               |
| OS-5  | 0.41  | 1.23    | 4.93    | 0.09 | 300         | 12          | 20.0        |                |              |                   |             | 20.0           | 2.47                                             | 3.09            | 5.19              | 1             | 4             | 26              |
| OS-6  | 0.05  | 0.14    | 0.54    | 0.09 | 275         | 13          | 18.1        |                |              |                   |             | 18.1           | 2.59                                             | 3.24            | 5.44              | 0.1           | 0.4           | 3               |
| OS-7  | 0.08  | 0.23    | 0.94    | 0.09 | 250         | 16          | 15.6        |                |              |                   |             | 15.6           | 2.76                                             | 3.46            | 5.81              | 0.2           | 0.8           | 5               |
| OS-8  | 0.65  | 0.90    | 1.69    | 0.25 | 100         | 2           | 12.2        | 600            | 2.0%         | 2.8               | 3.5         | 15.7           | 2.75                                             | 3.45            | 5.79              | 2             | 3             | 10              |

JOB NUMBER: 1185.20

DATE: 02/02/22
CALC'D BY: MAW

 $t_i = \frac{0.395(1.1 - C_5)\sqrt{L}}{S^{0.33}}$   $V = C_v S_w^{0.5}$  Tc=L/V

Table 6-7. Conveyance Coefficient, Cv

| Type of Land Surface                           | C,  |
|------------------------------------------------|-----|
| Heavy meadow                                   | 2.5 |
| Tillage/field L                                | 5   |
| Riprap (not buried) $t_c = \frac{1}{180} + 10$ | 6.5 |
| Short pasture and lawns                        | 7   |
| Nearly bare ground                             | 10  |
| Grassed waterway                               | 15  |
| Paved areas and shallow paved swales           | 20  |

For buried riprap, select C<sub>v</sub> value based on type of vegetative cover.

# FINAL DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

|       |       | WEIGHTEI | )       |      | OVER           | LAND        |             | STRE           | ET / CH      | IANNEL         | FLOW        | Tc             | IN              | NTENSIT         | Υ                 | TOT           | AL FLO        | ows             |
|-------|-------|----------|---------|------|----------------|-------------|-------------|----------------|--------------|----------------|-------------|----------------|-----------------|-----------------|-------------------|---------------|---------------|-----------------|
| BASIN | CA(2) | CA(5)    | CA(100) | C(5) | Length<br>(ft) | Height (ft) | Tc<br>(min) | Length<br>(ft) | Slope<br>(%) | Velocity (fps) | Tc<br>(min) | TOTAL<br>(min) | l(2)<br>(in/hr) | l(5)<br>(in/hr) | I(100)<br>(in/hr) | Q(2)<br>(cfs) | Q(5)<br>(cfs) | Q(100)<br>(cfs) |
| OS-9  | 0.16  | 0.23     | 0.42    | 0.25 | 50             | 1           | 8.6         | 600            | 3.0%         | 3.5            | 2.9         | 11.5           | 3.13            | 3.92            | 6.58              | 0.5           | 0.9           | 3               |
|       |       |          |         |      |                |             |             |                |              |                |             |                |                 |                 |                   |               |               |                 |
| А     | 0.99  | 1.71     | 4.08    | 0.14 | 300            | 10.5        | 19.9        | 375            | 4.0%         | 2.0            | 3.1         | 23.0           | 2.30            | 2.88            | 4.84              | 2             | 5             | 20              |
| В     | 0.86  | 1.30     | 2.74    | 0.14 | 230            | 15          | 14.2        | 450            | 2.0%         | 1.4            | 5.3         | 19.5           | 2.50            | 3.13            | 5.25              | 2             | 4             | 14              |
| С     | 0.61  | 0.84     | 1.60    | 0.14 | 300            | 10          | 20.2        |                |              |                |             | 20.2           | 2.46            | 3.08            | 5.16              | 2             | 3             | 8               |
| D     | 0.30  | 0.47     | 1.03    | 0.14 | 250            | 10          | 17.3        |                |              |                |             | 17.3           | 2.64            | 3.30            | 5.54              | 1             | 2             | 6               |
| E1    | 0.80  | 1.34     | 3.09    | 0.14 | 300            | 12          | 19.0        | 300            | 2.0%         | 1.4            | 3.5         | 22.5           | 2.33            | 2.91            | 4.88              | 2             | 4             | 15              |
| E2    | 0.21  | 0.43     | 1.15    | 0.14 | 300            | 7           | 22.7        |                |              |                |             | 22.7           | 2.32            | 2.90            | 4.87              | 0.5           | 1.2           | 6               |
| F     | 0.49  | 1.22     | 4.64    | 0.10 | 300            | 9           | 21.8        | 600            | 1.5%         | 1.2            | 8.2         | 29.9           | 1.99            | 2.48            | 4.17              | 1             | 3             | 19              |
| G     | 0.58  | 0.65     | 0.90    | 0.14 | 100            | 2           | 13.8        |                |              |                |             | 13.8           | 2.91            | 3.65            | 6.12              | 1.7           | 2.4           | 5               |
| H1    | 0.19  | 0.22     | 0.31    | 0.22 | 100            | 4           | 10.1        |                |              |                |             | 10.1           | 3.29            | 4.12            | 6.92              | 0.6           | 0.9           | 2               |
| H2    | 0.18  | 0.21     | 0.29    | 0.22 | 100            | 4           | 10.1        |                |              |                |             | 10.1           | 3.29            | 4.12            | 6.92              | 0.6           | 0.8           | 2               |
| - 1   | 0.07  | 0.08     | 0.10    | 0.25 | 100            | 6           | 8.5         |                |              |                |             | 8.5            | 3.49            | 4.37            | 7.34              | 0.2           | 0.3           | 0.8             |
| J     | 1.56  | 1.93     | 3.12    | 0.25 | 100            | 2           | 12.2        | 600            | 2.0%         | 2.8            | 3.5         | 15.7           | 2.75            | 3.45            | 5.79              | 4             | 7             | 18              |
| К     | 0.27  | 0.38     | 0.71    | 0.25 | 100            | 3           | 10.7        |                |              |                |             | 10.7           | 3.22            | 4.03            | 6.77              | 1             | 2             | 5               |

JOB NUMBER: 1185.20

DATE: 02/02/22
CALC'D BY: MAW

 $t_i = \frac{0.395(1.1 - C_5)\sqrt{L}}{S^{0.33}} \qquad V = C_v S_w^{0.5} \qquad \text{Tc=L/V}$ 

Table 6-7. Conveyance Coefficient, Cv

| Type of Land Surface                              | C,  |
|---------------------------------------------------|-----|
| Heavy meadow                                      | 2.5 |
| Tillage/field L . 10                              | 5   |
| Riprap (not buried)* $I_c = \frac{180}{180} + 10$ | 6.5 |
| Short pasture and lawns                           | 7   |
| Nearly bare ground                                | 10  |
| Grassed waterway                                  | 15  |
| Paved areas and shallow paved swales              | 20  |

For buried riprap, select C<sub>v</sub> value based on type of vegetative cover.

# FINAL DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

|       |       | WEIGHTE | )       |      | OVER           | LAND        |             | STRE           | ET / CH      | IANNEL            | FLOW        | Tc             | IN              | ITENSIT         | Υ                 | TOTAL FLOWS   |               |                 |
|-------|-------|---------|---------|------|----------------|-------------|-------------|----------------|--------------|-------------------|-------------|----------------|-----------------|-----------------|-------------------|---------------|---------------|-----------------|
| BASIN | CA(2) | CA(5)   | CA(100) | C(5) | Length<br>(ft) | Height (ft) | Tc<br>(min) | Length<br>(ft) | Slope<br>(%) | Velocity<br>(fps) | Tc<br>(min) | TOTAL<br>(min) | l(2)<br>(in/hr) | I(5)<br>(in/hr) | I(100)<br>(in/hr) | Q(2)<br>(cfs) | Q(5)<br>(cfs) | Q(100)<br>(cfs) |
| L     | 0.10  | 0.13    | 0.25    | 0.25 | 100            | 8           | 7.7         |                |              |                   |             | 7.7            | 3.60            | 4.52            | 7.58              | 0.3           | 0.6           | 2               |
| М     | 0.29  | 0.33    | 0.48    | 0.25 | 100            | 2           | 12.2        | 100            | 2.0%         | 2.8               | 0.6         | 12.8           | 3.00            | 3.76            | 6.31              | 0.9           | 1.2           | 3               |
| N     | 0.22  | 0.26    | 0.37    | 0.25 | 100            | 2           | 12.2        | 80             | 2.0%         | 2.8               | 0.5         | 12.7           | 3.01            | 3.77            | 6.33              | 0.7           | 1.0           | 2               |
| 0     | 0.68  | 0.86    | 1.44    | 0.25 | 100            | 2           | 12.2        | 400            | 3.0%         | 3.5               | 1.9         | 14.1           | 2.88            | 3.61            | 6.06              | 2             | 3             | 9               |
| Р     | 0.36  | 0.41    | 0.59    | 0.25 | 50             | 1           | 8.6         | 400            | 3.0%         | 3.5               | 1.9         | 10.6           | 3.23            | 4.05            | 6.80              | 1             | 2             | 4               |
| Q     | 0.11  | 0.27    | 0.76    | 0.14 | 80             | 5           | 8.5         |                |              |                   |             | 8.5            | 3.49            | 4.38            | 7.35              | 0.4           | 1.2           | 6               |
| R     | 0.91  | 1.07    | 1.56    | 0.25 | 100            | 2           | 12.2        | 700            | 3.0%         | 3.5               | 3.4         | 15.6           | 2.77            | 3.46            | 5.82              | 3             | 4             | 9               |
| S     | 1.83  | 2.24    | 3.54    | 0.25 | 50             | 1           | 8.6         | 1100           | 3.0%         | 3.5               | 5.3         | 13.9           | 2.90            | 3.63            | 6.10              | 5             | 8             | 22              |
| T     | 0.28  | 0.33    | 0.53    | 0.08 | 50             | 1           | 10.4        | 500            | 3.0%         | 3.5               | 2.4         | 12.8           | 3.00            | 3.76            | 6.32              | 0.8           | 1.2           | 3               |
| U     | 0.27  | 0.38    | 0.71    | 0.25 | 80             | 5           | 7.5         |                |              |                   |             | 7.5            | 3.64            | 4.56            | 7.66              | 1             | 2             | 5               |
| V     | 0.38  | 0.53    | 0.99    | 0.25 | 90             | 1.8         | 11.6        |                |              |                   |             | 11.6           | 3.12            | 3.91            | 6.56              | 1             | 2             | 6               |
| W     | 0.36  | 0.45    | 0.73    | 0.25 | 100            | 3           | 10.7        |                |              |                   |             | 10.7           | 3.22            | 4.03            | 6.77              | 1             | 2             | 5               |

JOB NUMBER: 1185.20
DATE: 02/02/22

CALCULATED BY: MAW

# FINAL DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

|                    |                                                           |                     |                       |               | Inten | sity   | FI   | ow     |                                     |
|--------------------|-----------------------------------------------------------|---------------------|-----------------------|---------------|-------|--------|------|--------|-------------------------------------|
| Design<br>Point(s) | Contributing Basins                                       | Equivalent<br>CA(5) | Equivalent<br>CA(100) | Maximum<br>Tc | I(5)  | I(100) | Q(5) | Q(100) | Inlet Size                          |
| EX-DP-5            | EX-5, EX-7 (61.8 AC.)                                     | 6.39                | 23.08                 | 44.6          | 1.88  | 3.16   | 12   | 73     |                                     |
| EX-DP-1            | EX-1 (12.7 AC.)                                           | 1.14                | 4.57                  | 32.4          | 2.37  | 3.97   | 3    | 18     |                                     |
| 1                  | EX-7, OS-1, OS-2, B (40.4 AC.)                            | 6.09                | 16.61                 | 40.4          | 2.04  | 3.41   | 12   | 57     | EX. DUAL 30" RCP<br>CULVERTS        |
| 2                  | Basin A (9.5 AC.)                                         | 1.71                | 4.08                  | 23.0          | 2.88  | 4.84   | 5    | 20     | 24" RCP CULVERT                     |
| 3                  | DP-1, DP-2, Basin D (52.2 ac.)                            | 8.28                | 21.72                 | 40.9          | 2.02  | 3.38   | 17   | 74     | 42" RCP CULVERT                     |
| 4                  | Basin C (3.3 AC.)                                         | 0.84                | 1.60                  | 20.2          | 3.08  | 5.16   | 3    | 8      | 24" RCP CULVERT                     |
| 5                  | POND 3 TOTAL INFLOW<br>DP-3, DP-4, BASIN E2<br>(58.3 AC.) | 9.55                | 24.47                 | 43.4          | 1.93  | 3.23   | 18   | 79     | POND 3                              |
| 6                  | Basin G, Basin OS-9 (2.3 ac.)                             | 0.88                | 1.32                  | 13.8          | 3.65  | 6.12   | 3    | 8      | Exist. 10' TYPE R A'<br>GRADE INLET |
| 7                  | Basin OS-4, J and 70% of Basin OS-5 (18.0 ac.)            | 3.02                | 7.47                  | 20.2          | 3.08  | 5.16   | 9    | 39     | 15' TYPE R SUMP<br>INLET            |
| 8                  | Basin N and 30% of Basin OS-5 (4.7 ac.)                   | 0.62                | 1.85                  | 20.2          | 3.08  | 5.16   | 2    | 10     | 10' TYPE R<br>SUMP INLET            |
| 9                  | Basin OS-8, Q (5.5 ac.)                                   | 1.17                | 2.45                  | 15.7          | 3.45  | 5.79   | 4    | 14     | Exist. 10' TYPE R<br>SUMP INLET     |
| 10                 | Basin OS-6, O (4.3 ac.)                                   | 1.00                | 1.98                  | 18.1          | 3.24  | 5.44   | 3    | 11     | 10' TYPE R<br>SUMP INLET            |
| 11                 | Basin P (1.0 ac.)                                         | 0.41                | 0.59                  | 10.6          | 4.05  | 6.80   | 2    | 4      | 5' TYPE R<br>SUMP INLET             |

JOB NUMBER: 1185.20
DATE: 02/02/22

DATE: 02/02/22
CALCULATED BY: MAW

# FINAL DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

|                    |                                               |                     |                       |               | Intensity |        | FI   | ow     |                              |
|--------------------|-----------------------------------------------|---------------------|-----------------------|---------------|-----------|--------|------|--------|------------------------------|
| Design<br>Point(s) | Contributing Basins                           | Equivalent<br>CA(5) | Equivalent<br>CA(100) | Maximum<br>Tc | I(5)      | I(100) | Q(5) | Q(100) | Inlet Size                   |
| 12                 | Basin R (2.7 ac.)                             | 1.07                | 1.56                  | 15.6          | 3.46      | 5.82   | 4    | u u    | 10' TYPE R AT<br>GRADE INLET |
| 13                 | Basin S and Flow-by from<br>Basin R (9.3 ac.) | 2.25                | 3.93                  | 16.1          | 3.42      | 5.74   | 8    | 93     | 15' TYPE R<br>SUMP INLET     |
| 14                 | Basin T (1.0 ac.)                             | 0.33                | 0.53                  | 12.8          | 3.76      | 6.32   | 1    | - 3    | 5' TYPE R<br>SUMP INLET      |
| 15                 | Basin V, W and OS-7 (6.1 ac.)                 | 1.21                | 2.65                  | 15.6          | 3.46      | 5.81   | 4    | 15     | TEMP. SEDIMENT<br>BASIN      |

JOB NAME: RETREAT AT TIMBERRIDGE FILING NO. 2

JOB NUMBER: 1185.20

DATE: 02/02/2
CALCULATED BY: MAW

## FINAL DRAINAGE REPORT ~ PIPE ROUTING SUMMARY

|          |                     |                  |                       |               | Inten | sity   | FI   | ow     |            |
|----------|---------------------|------------------|-----------------------|---------------|-------|--------|------|--------|------------|
| Pipe Run | Contributing Basins | Equivalent CA(5) | Equivalent<br>CA(100) | Maximum<br>Tc | I(5)  | I(100) | Q(5) | Q(100) | Pipe Size* |
| 1        | DP-3                | 8.28             | 21.72                 | 40.9          | 2.02  | 3.38   | 17   | 74     | 42" RCP    |
| 2        | DP-4                | 0.84             | 1.60                  | 20.2          | 3.08  | 5.16   | 3    | 8      | 24" RCP    |
| 3        | PR-1, PR-2          | 9.12             | 23.32                 | 40.9          | 2.02  | 3.38   | 18   | 79     | 42" RCP    |
| 4        | DP-7                | 3.02             | 7.47                  | 20.2          | 3.08  | 5.16   | 9    | 39     | 30" RCP    |
| 5        | DP-8                | 0.62             | 1.85                  | 20.2          | 3.08  | 5.16   | 2    | 10     | 24" RCP    |
| 6        | PR-1, PR-2          | 3.64             | 9.32                  | 20.8          | 3.03  | 5.09   | 11   | 47     | 36" RCP    |
| 7        | DP-10               | 1.00             | 1.98                  | 10.6          | 4.05  | 6.80   | 4    | 13     | 24" RCP    |
| 8        | DP-11               | 0.41             | 0.59                  | 13.8          | 3.65  | 6.12   | 2    | 4      | 18" RCP    |
| 9        | PR-3, PR-4, PR-5    | 5.05             | 11.89                 | 21.8          | 2.96  | 4.97   | 15   | 59     | 36" RCP    |
| 10       | DP-12 Pickup        | 1.05             | 1.17                  | 15.6          | 3.46  | 5.82   | 4    | 7      | 24" RCP    |
| 11       | PR-6, PR-7          | 6.11             | 13.06                 | 22.2          | 2.93  | 4.92   | 18   | 64     | 36" RCP    |
| 12       | DP-13               | 2.25             | 3.93                  | 16.1          | 3.42  | 5.74   | 8    | 23     | 30" RCP    |
| 13       | DP-14               | 0.33             | 0.53                  | 16.3          | 3.40  | 5.70   | 1    | 3      | 18" RCP    |
| 14       | PR-9, PR-10         | 2.57             | 4.47                  | 16.3          | 3.40  | 5.70   | 9    | 25     | 30" RCP    |
| 15       | PR-8, PR-11         | 8.68             | 17.53                 | 22.7          | 2.90  | 4.87   | 25   | 85     | 42" RCP    |

<sup>02/02/22</sup> MAW


<sup>\*</sup> PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE. REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

RETREAT AT TIMBERRIDGE FILING NO. 2

DP-6

Project: Inlet ID:




#### Gutter Geometry (Enter data in the blue cells) Maximum Allowable Width for Spread Behind Curb T<sub>BACK</sub> = 12.5 Side Slope Behind Curb (leave blank for no conveyance credit behind curb) $S_{\text{BACK}}$ 0.020 Manning's Roughness Behind Curb (typically between 0.012 and 0.020) 0.013 Height of Curb at Gutter Flow Line H<sub>CURB</sub> : 6.00 inches Distance from Curb Face to Street Crown T<sub>CROWN</sub> 17.0 Gutter Width w : 2.00 Street Transverse Slope S<sub>X</sub> = 0.020 ft/ft S<sub>W</sub> Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) ft/ft 0.083 Street Longitudinal Slope - Enter 0 for sump condition So 0.017 ft/ft Manning's Roughness for Street Section (typically between 0.012 and 0.020) n<sub>STREET</sub> = 0.016 Minor Storm Major Storm Max. Allowable Spread for Minor & Major Storm 17.0 17.0 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm 6.0 12.0 inches Allow Flow Depth at Street Crown (leave blank for no) check = yes MINOR STORM Allowable Capacity is based on Spread Criterion Minor Storm Major Storm MAJOR STORM Allowable Capacity is based on Spread Criterion 14.2 14.2 linor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Managem lajor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Managem

118520-UD-Inlet\_v4.05, DP-6 2/4/2022, 9:18 AM

# INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

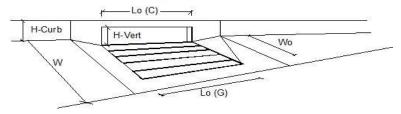

| Design Information (Input)  CDOT Type R Curb Opening                      |                         | MINOR       | MAJOR          |        |
|---------------------------------------------------------------------------|-------------------------|-------------|----------------|--------|
| Type of Inlet CDOT Type R Curb Opening                                    | Type =                  | CDOT Type F | R Curb Opening |        |
| Local Depression (additional to continuous gutter depression 'a')         | a <sub>LOCAL</sub> =    | 3.0         | 3.0            | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening)                | No =                    | 1           | 1              |        |
| Length of a Single Unit Inlet (Grate or Curb Opening)                     | L <sub>o</sub> =        | 10.00       | 10.00          | ft     |
| Width of a Unit Grate (cannot be greater than W, Gutter Width)            | W <sub>o</sub> =        | N/A         | N/A            | ft     |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5)        | C <sub>f</sub> -G =     | N/A         | N/A            |        |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | C <sub>f</sub> -C =     | 0.10        | 0.10           |        |
| Street Hydraulics: OK - Q < Allowable Street Capacity'                    |                         | MINOR       | MAJOR          |        |
| Total Inlet Interception Capacity                                         | Q =                     | 3.0         | 6.3            | cfs    |
| Total Inlet Carry-Over Flow (flow bypassing inlet)                        | <b>Q</b> <sub>b</sub> = | 0.0         | 1.7            | cfs    |
| Capture Percentage = Q <sub>a</sub> /Q <sub>o</sub> =                     | C% =                    | 100         | 79             | %      |


118520-UD-Inlet\_v4.05, DP-6 2/4/2022, 9:18 AM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

RETREAT AT TIMBERRIDGE FILING NO. 2

DP-7


Project: Inlet ID:



| MAJOR STORM Allowable Capacity is based on Depth Criterion                 | Q <sub>allow</sub> =  | SUMP        | SUMP        | cfs    |
|----------------------------------------------------------------------------|-----------------------|-------------|-------------|--------|
| MINOR STORM Allowable Capacity is based on Depth Criterion                 | _                     | Minor Storm | Major Storm | _      |
| Check boxes are not applicable in SUMP conditions                          |                       |             |             |        |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm            | d <sub>MAX</sub> =    | 6.0         | 12.0        | inches |
| Max. Allowable Spread for Minor & Major Storm                              | T <sub>MAX</sub> =    | 17.0        | 17.0        | ft     |
|                                                                            | _                     | Minor Storm | Major Storm | _      |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | n <sub>STREET</sub> = | 0.016       | ]           |        |
| Street Longitudinal Slope - Enter 0 for sump condition                     | S <sub>o</sub> =      | 0.000       | ft/ft       |        |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)      | S <sub>W</sub> =      | 0.083       | ft/ft       |        |
| Street Transverse Slope                                                    | S <sub>X</sub> =      | 0.020       | ft/ft       |        |
| Gutter Width                                                               | W =                   | 2.00        | ft          |        |
| Distance from Curb Face to Street Crown                                    | T <sub>CROWN</sub> =  | 17.0        | ft          |        |
| Height of Curb at Gutter Flow Line                                         | H <sub>CURB</sub> =   | 6.00        | inches      |        |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020)        | n <sub>BACK</sub> =   | 0.013       | ]           |        |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb)  | S <sub>BACK</sub> =   | 0.020       | ft/ft       |        |
| Maximum Allowable Width for Spread Behind Curb                             | T <sub>BACK</sub> =   | 12.5        | ft          |        |

118520-UD-Inlet\_v4.05, DP-7 3/30/2021, 4:13 PM

Version 4.05 Released March 2017



| Design Information (Input)               | CDOT Type R Curb Opening                 | 1                            | MINOR       | MAJOR          |                 |
|------------------------------------------|------------------------------------------|------------------------------|-------------|----------------|-----------------|
| Type of Inlet                            | CDOT Type R Curb Opening                 | Type =                       | CDOT Type F | R Curb Opening |                 |
| Local Depression (additional to cont     | inuous gutter depression 'a' from above) | a <sub>local</sub> =         | 3.00        | 3.00           | inches          |
| Number of Unit Inlets (Grate or Curt     | Opening)                                 | No =                         | 1           | 1              |                 |
| Water Depth at Flowline (outside of      | local depression)                        | Ponding Depth =              | 6.0         | 12.0           | inches          |
| Grate Information                        |                                          |                              | MINOR       | MAJOR          | Override Depths |
| Length of a Unit Grate                   |                                          | L <sub>0</sub> (G) =         | N/A         | N/A            | feet            |
| Width of a Unit Grate                    |                                          | W <sub>o</sub> =             | N/A         | N/A            | feet            |
| Area Opening Ratio for a Grate (typi     | ical values 0.15-0.90)                   | A <sub>ratio</sub> =         | N/A         | N/A            |                 |
| Clogging Factor for a Single Grate (     | typical value 0.50 - 0.70)               | C <sub>f</sub> (G) =         | N/A         | N/A            |                 |
| Grate Weir Coefficient (typical value    | 2.15 - 3.60)                             | C <sub>w</sub> (G) =         | N/A         | N/A            |                 |
| Grate Orifice Coefficient (typical value | ue 0.60 - 0.80)                          | C <sub>o</sub> (G) =         | N/A         | N/A            |                 |
| Curb Opening Information                 |                                          |                              | MINOR       | MAJOR          | _               |
| Length of a Unit Curb Opening            |                                          | L <sub>o</sub> (C) =         | 15.00       | 15.00          | feet            |
| Height of Vertical Curb Opening in I     | nches                                    | H <sub>vert</sub> =          | 6.00        | 6.00           | inches          |
| Height of Curb Orifice Throat in Inch    | nes                                      | H <sub>throat</sub> =        | 6.00        | 6.00           | inches          |
| Angle of Throat (see USDCM Figure        | e ST-5)                                  | Theta =                      | 63.40       | 63.40          | degrees         |
| Side Width for Depression Pan (typi      | cally the gutter width of 2 feet)        | W <sub>p</sub> =             | 2.00        | 2.00           | feet            |
| Clogging Factor for a Single Curb O      | pening (typical value 0.10)              | $C_f(C) =$                   | 0.10        | 0.10           |                 |
| Curb Opening Weir Coefficient (typi      | cal value 2.3-3.7)                       | C <sub>w</sub> (C) =         | 3.60        | 3.60           |                 |
| Curb Opening Orifice Coefficient (ty     | pical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =         | 0.67        | 0.67           |                 |
| Low Head Performance Reduction           | n (Calculated)                           |                              | MINOR       | MAJOR          |                 |
| Depth for Grate Midwidth                 |                                          | d <sub>Grate</sub> =         | N/A         | N/A            | ft              |
| Depth for Curb Opening Weir Equat        | tion                                     | d <sub>Curb</sub> =          | 0.33        | 0.83           | ft              |
| Combination Inlet Performance Red        | luction Factor for Long Inlets           | RF <sub>Combination</sub> =  | 0.57        | 1.00           |                 |
| Curb Opening Performance Reducti         | ion Factor for Long Inlets               | RF <sub>Curb</sub> =         | 0.79        | 1.00           |                 |
| Grated Inlet Performance Reduction       | Factor for Long Inlets                   | RF <sub>Grate</sub> =        | N/A         | N/A            |                 |
|                                          |                                          |                              | MINOR       | MAJOR          | _               |
| Total Inlet Interception Cap             | acity (assumes clogged condition)        | <b>Q</b> <sub>a</sub> =      | 9.7         | 39.1           | cfs             |
| Inlet Capacity IS GOOD for Minor         | and Major Storms(>Q PEAK)                | Q <sub>PEAK REQUIRED</sub> = | 9.0         | 39.0           | cfs             |

118520-UD-Inlet\_v4.05, DP-7 3/30/2021, 4:13 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

RETREAT AT TIMBERRIDGE FILING NO. 2

DP-8


Project: Inlet ID:

STREET

#### Gutter Geometry (Enter data in the blue cells) Maximum Allowable Width for Spread Behind Curb T<sub>BACK</sub> = 12.5 Side Slope Behind Curb (leave blank for no conveyance credit behind curb) $S_{\text{BACK}}$ 0.020 ft/ft Manning's Roughness Behind Curb (typically between 0.012 and 0.020) 0.013 Height of Curb at Gutter Flow Line H<sub>CURB</sub> : 6.00 inches Distance from Curb Face to Street Crown T<sub>CROWN</sub> 17.0 Gutter Width w : 2.00 Street Transverse Slope S<sub>X</sub> = 0.020 ft/ft S<sub>W</sub> Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) ft/ft 0.083 Street Longitudinal Slope - Enter 0 for sump condition So 0.000 ft/ft Manning's Roughness for Street Section (typically between 0.012 and 0.020) n<sub>STREET</sub> = 0.016 Minor Storm Major Storm Max. Allowable Spread for Minor & Major Storm 17.0 17.0 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm 6.0 12.0 Check boxes are not applicable in SUMP conditions MINOR STORM Allowable Capacity is based on Depth Criterion Major Storm Minor Storm MAJOR STORM Allowable Capacity is based on Depth Criterion SUMP SUMP

118520-UD-Inlet v4.05, DP-8 3/30/2021, 4:13 PM

Version 4.05 Released March 2017



| Design Information (Input)  CDOT Type R Curb Opening                         |                             | MINOR       | MAJOR        |                 |
|------------------------------------------------------------------------------|-----------------------------|-------------|--------------|-----------------|
| Type of Inlet                                                                | Type =                      | CDOT Type R | Curb Opening |                 |
| Local Depression (additional to continuous gutter depression 'a' from above) | a <sub>local</sub> =        | 3.00        | 3.00         | inches          |
| Number of Unit Inlets (Grate or Curb Opening)                                | No =                        | 1           | 1            |                 |
| Water Depth at Flowline (outside of local depression)                        | Ponding Depth =             | 6.0         | 12.0         | inches          |
| Grate Information                                                            |                             | MINOR       | MAJOR        | Override Depths |
| Length of a Unit Grate                                                       | L <sub>0</sub> (G) =        | N/A         | N/A          | feet            |
| Width of a Unit Grate                                                        | W <sub>o</sub> =            | N/A         | N/A          | feet            |
| Area Opening Ratio for a Grate (typical values 0.15-0.90)                    | A <sub>ratio</sub> =        | N/A         | N/A          |                 |
| Clogging Factor for a Single Grate (typical value 0.50 - 0.70)               | C <sub>f</sub> (G) =        | N/A         | N/A          |                 |
| Grate Weir Coefficient (typical value 2.15 - 3.60)                           | C <sub>w</sub> (G) =        | N/A         | N/A          |                 |
| Grate Orifice Coefficient (typical value 0.60 - 0.80)                        | C <sub>o</sub> (G) =        | N/A         | N/A          |                 |
| Curb Opening Information                                                     | _                           | MINOR       | MAJOR        |                 |
| Length of a Unit Curb Opening                                                | L <sub>o</sub> (C) =        | 10.00       | 10.00        | feet            |
| Height of Vertical Curb Opening in Inches                                    | H <sub>vert</sub> =         | 6.00        | 6.00         | inches          |
| Height of Curb Orifice Throat in Inches                                      | H <sub>throat</sub> =       | 6.00        | 6.00         | inches          |
| Angle of Throat (see USDCM Figure ST-5)                                      | Theta =                     | 63.40       | 63.40        | degrees         |
| Side Width for Depression Pan (typically the gutter width of 2 feet)         | W <sub>p</sub> =            | 2.00        | 2.00         | feet            |
| Clogging Factor for a Single Curb Opening (typical value 0.10)               | $C_f(C) =$                  | 0.10        | 0.10         |                 |
| Curb Opening Weir Coefficient (typical value 2.3-3.7)                        | C <sub>w</sub> (C) =        | 3.60        | 3.60         |                 |
| Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =        | 0.67        | 0.67         |                 |
| Low Head Performance Reduction (Calculated)                                  |                             | MINOR       | MAJOR        |                 |
| Depth for Grate Midwidth                                                     | d <sub>Grate</sub> =        | N/A         | N/A          | ft              |
| Depth for Curb Opening Weir Equation                                         | d <sub>Curb</sub> =         | 0.33        | 0.83         | ft              |
| Combination Inlet Performance Reduction Factor for Long Inlets               | RF <sub>Combination</sub> = | 0.57        | 1.00         |                 |
| Curb Opening Performance Reduction Factor for Long Inlets                    | RF <sub>Curb</sub> =        | 0.93        | 1.00         |                 |
| Grated Inlet Performance Reduction Factor for Long Inlets                    | RF <sub>Grate</sub> =       | N/A         | N/A          |                 |
|                                                                              |                             | MINOR       | MAJOR        | _               |
| Total Inlet Interception Capacity (assumes clogged condition)                | Q <sub>a</sub> =            | 8.3         | 25.5         | cfs             |
| Inlet Capacity IS GOOD for Minor and Major Storms(>Q PEAK)                   | Q PEAK REQUIRED =           | 2.0         | 10.0         | cfs             |

118520-UD-Inlet\_v4.05, DP-8 3/30/2021, 4:13 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

RETREAT AT TIMBERRIDGE FILING NO. 2

DP-9


Project: Inlet ID:

STREET

#### Gutter Geometry (Enter data in the blue cells) Maximum Allowable Width for Spread Behind Curb T<sub>BACK</sub> = 12.5 Side Slope Behind Curb (leave blank for no conveyance credit behind curb) $S_{\text{BACK}}$ 0.020 ft/ft Manning's Roughness Behind Curb (typically between 0.012 and 0.020) 0.013 Height of Curb at Gutter Flow Line H<sub>CURB</sub> : 6.00 inches Distance from Curb Face to Street Crown T<sub>CROWN</sub> 17.0 Gutter Width w : 2.00 Street Transverse Slope S<sub>X</sub> = 0.020 ft/ft S<sub>W</sub> Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) ft/ft 0.083 Street Longitudinal Slope - Enter 0 for sump condition So 0.000 ft/ft Manning's Roughness for Street Section (typically between 0.012 and 0.020) n<sub>STREET</sub> = 0.016 Minor Storm Major Storm Max. Allowable Spread for Minor & Major Storm 17.0 17.0 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm 6.0 12.0 Check boxes are not applicable in SUMP conditions MINOR STORM Allowable Capacity is based on Depth Criterion Major Storm Minor Storm MAJOR STORM Allowable Capacity is based on Depth Criterion SUMP SUMP cfs

118520-UD-Inlet v4.05, DP-9 3/30/2021, 4:13 PM

Version 4.05 Released March 2017



| Design Information (Input)           | CDOT Type R Curb Opening   ▼                | ı                            | MINOR       | MAJOR          |                 |
|--------------------------------------|---------------------------------------------|------------------------------|-------------|----------------|-----------------|
| Type of Inlet                        | CDOT Type R Curb Opening                    | Type =                       | CDOT Type F | R Curb Opening |                 |
| Local Depression (additional to co   | ontinuous gutter depression 'a' from above) | a <sub>local</sub> =         | 3.00        | 3.00           | inches          |
| Number of Unit Inlets (Grate or C    | urb Opening)                                | No =                         | 1           | 1              |                 |
| Water Depth at Flowline (outside     | of local depression)                        | Ponding Depth =              | 6.0         | 12.0           | inches          |
| Grate Information                    |                                             |                              | MINOR       | MAJOR          | Override Depths |
| Length of a Unit Grate               |                                             | L <sub>0</sub> (G) =         | N/A         | N/A            | feet            |
| Width of a Unit Grate                |                                             | W <sub>o</sub> =             | N/A         | N/A            | feet            |
| Area Opening Ratio for a Grate (t    | ypical values 0.15-0.90)                    | A <sub>ratio</sub> =         | N/A         | N/A            |                 |
| Clogging Factor for a Single Grat    | e (typical value 0.50 - 0.70)               | C <sub>f</sub> (G) =         | N/A         | N/A            |                 |
| Grate Weir Coefficient (typical va   | lue 2.15 - 3.60)                            | C <sub>w</sub> (G) =         | N/A         | N/A            |                 |
| Grate Orifice Coefficient (typical v | ralue 0.60 - 0.80)                          | C <sub>o</sub> (G) =         | N/A         | N/A            |                 |
| Curb Opening Information             |                                             |                              | MINOR       | MAJOR          | _               |
| Length of a Unit Curb Opening        |                                             | L <sub>o</sub> (C) =         | 10.00       | 10.00          | feet            |
| Height of Vertical Curb Opening i    | n Inches                                    | H <sub>vert</sub> =          | 6.00        | 6.00           | inches          |
| Height of Curb Orifice Throat in Ir  | ches                                        | H <sub>throat</sub> =        | 6.00        | 6.00           | inches          |
| Angle of Throat (see USDCM Fig       | ure ST-5)                                   | Theta =                      | 63.40       | 63.40          | degrees         |
| Side Width for Depression Pan (t     | pically the gutter width of 2 feet)         | W <sub>p</sub> =             | 2.00        | 2.00           | feet            |
| Clogging Factor for a Single Curb    | Opening (typical value 0.10)                | $C_f(C) =$                   | 0.10        | 0.10           |                 |
| Curb Opening Weir Coefficient (ty    | pical value 2.3-3.7)                        | C <sub>w</sub> (C) =         | 3.60        | 3.60           |                 |
| Curb Opening Orifice Coefficient     | (typical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =         | 0.67        | 0.67           |                 |
| Low Head Performance Reduct          | ion (Calculated)                            |                              | MINOR       | MAJOR          |                 |
| Depth for Grate Midwidth             |                                             | d <sub>Grate</sub> =         | N/A         | N/A            | ft              |
| Depth for Curb Opening Weir Equ      | uation                                      | d <sub>Curb</sub> =          | 0.33        | 0.83           | ft              |
| Combination Inlet Performance R      | eduction Factor for Long Inlets             | RF <sub>Combination</sub> =  | 0.57        | 1.00           |                 |
| Curb Opening Performance Redu        | ction Factor for Long Inlets                | RF <sub>Curb</sub> =         | 0.93        | 1.00           |                 |
| Grated Inlet Performance Reducti     | on Factor for Long Inlets                   | RF <sub>Grate</sub> =        | N/A         | N/A            |                 |
|                                      |                                             | _                            | MINOR       | MAJOR          | _               |
| Total Inlet Interception Ca          | apacity (assumes clogged condition)         | Q <sub>a</sub> =             | 8.3         | 25.5           | cfs             |
| Inlet Capacity IS GOOD for Min       | or and Major Storms(>Q PEAK)                | Q <sub>PEAK REQUIRED</sub> = | 4.0         | 14.0           | cfs             |

118520-UD-Inlet\_v4.05, DP-9 3/30/2021, 4:13 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

RETREAT AT TIMBERRIDGE FILING NO. 2

DP-10


Project: Inlet ID:

STREET

| <u></u>                                                                    |                       |             |             |        |
|----------------------------------------------------------------------------|-----------------------|-------------|-------------|--------|
| Gutter Geometry (Enter data in the blue cells)                             | _                     |             |             |        |
| Maximum Allowable Width for Spread Behind Curb                             | T <sub>BACK</sub> =   | 12.5        | ft          |        |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb)  | S <sub>BACK</sub> =   | 0.020       | ft/ft       |        |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020)        | n <sub>BACK</sub> =   | 0.013       | ]           |        |
| Height of Curb at Gutter Flow Line                                         | H <sub>CURB</sub> =   | 6.00        | inches      |        |
| Distance from Curb Face to Street Crown                                    | T <sub>CROWN</sub> =  | 17.0        | ft          |        |
| Gutter Width                                                               | W =                   | 2.00        | ft          |        |
| Street Transverse Slope                                                    | S <sub>X</sub> =      | 0.020       | ft/ft       |        |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)      | S <sub>W</sub> =      | 0.083       | ft/ft       |        |
| Street Longitudinal Slope - Enter 0 for sump condition                     | S <sub>o</sub> =      | 0.000       | ft/ft       |        |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | n <sub>STREET</sub> = | 0.016       | ]           |        |
|                                                                            | _                     | Minor Storm | Major Storm | _      |
| Max. Allowable Spread for Minor & Major Storm                              | T <sub>MAX</sub> =    | 17.0        | 17.0        | ft     |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm            | d <sub>MAX</sub> =    | 6.0         | 12.0        | inches |
| Check boxes are not applicable in SUMP conditions                          | _                     |             |             |        |
| MINOR STORM Allowable Capacity is based on Depth Criterion                 |                       | Minor Storm | Major Storm |        |
| MAJOR STORM Allowable Capacity is based on Depth Criterion                 | Q <sub>allow</sub> =  | SUMP        | SUMP        | cfs    |

118520-UD-Inlet\_v4.05, DP-10 3/30/2021, 4:13 PM

Version 4.05 Released March 2017



| Design Information (Input)  CDOT Type R Curb Opening                         |                             | MINOR       | MAJOR        |                 |
|------------------------------------------------------------------------------|-----------------------------|-------------|--------------|-----------------|
| Type of Inlet                                                                | Type =                      | CDOT Type R | Curb Opening |                 |
| Local Depression (additional to continuous gutter depression 'a' from above) | a <sub>local</sub> =        | 3.00        | 3.00         | inches          |
| Number of Unit Inlets (Grate or Curb Opening)                                | No =                        | 1           | 1            |                 |
| Water Depth at Flowline (outside of local depression)                        | Ponding Depth =             | 6.0         | 12.0         | inches          |
| Grate Information                                                            |                             | MINOR       | MAJOR        | Override Depths |
| Length of a Unit Grate                                                       | L₀ (G) =                    | N/A         | N/A          | feet            |
| Width of a Unit Grate                                                        | W <sub>o</sub> =            | N/A         | N/A          | feet            |
| Area Opening Ratio for a Grate (typical values 0.15-0.90)                    | A <sub>ratio</sub> =        | N/A         | N/A          |                 |
| Clogging Factor for a Single Grate (typical value 0.50 - 0.70)               | $C_f(G) =$                  | N/A         | N/A          |                 |
| Grate Weir Coefficient (typical value 2.15 - 3.60)                           | C <sub>w</sub> (G) =        | N/A         | N/A          |                 |
| Grate Orifice Coefficient (typical value 0.60 - 0.80)                        | C <sub>o</sub> (G) =        | N/A         | N/A          |                 |
| Curb Opening Information                                                     | _                           | MINOR       | MAJOR        | _               |
| Length of a Unit Curb Opening                                                | L <sub>0</sub> (C) =        | 10.00       | 10.00        | feet            |
| Height of Vertical Curb Opening in Inches                                    | H <sub>vert</sub> =         | 6.00        | 6.00         | inches          |
| Height of Curb Orifice Throat in Inches                                      | H <sub>throat</sub> =       | 6.00        | 6.00         | inches          |
| Angle of Throat (see USDCM Figure ST-5)                                      | Theta =                     | 63.40       | 63.40        | degrees         |
| Side Width for Depression Pan (typically the gutter width of 2 feet)         | W <sub>p</sub> =            | 2.00        | 2.00         | feet            |
| Clogging Factor for a Single Curb Opening (typical value 0.10)               | $C_f(C) =$                  | 0.10        | 0.10         |                 |
| Curb Opening Weir Coefficient (typical value 2.3-3.7)                        | C <sub>w</sub> (C) =        | 3.60        | 3.60         |                 |
| Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =        | 0.67        | 0.67         |                 |
| Low Head Performance Reduction (Calculated)                                  |                             | MINOR       | MAJOR        |                 |
| Depth for Grate Midwidth                                                     | d <sub>Grate</sub> =        | N/A         | N/A          | ft              |
| Depth for Curb Opening Weir Equation                                         | d <sub>Curb</sub> =         | 0.33        | 0.83         | ft              |
| Combination Inlet Performance Reduction Factor for Long Inlets               | RF <sub>Combination</sub> = | 0.57        | 1.00         |                 |
| Curb Opening Performance Reduction Factor for Long Inlets                    | RF <sub>Curb</sub> =        | 0.93        | 1.00         |                 |
| Grated Inlet Performance Reduction Factor for Long Inlets                    | RF <sub>Grate</sub> =       | N/A         | N/A          |                 |
|                                                                              |                             | MINOR       | MAJOR        | _               |
| Total Inlet Interception Capacity (assumes clogged condition)                | <b>Q</b> <sub>a</sub> =     | 8.3         | 25.5         | cfs             |
| Inlet Capacity IS GOOD for Minor and Major Storms(>Q PEAK)                   | Q PEAK REQUIRED =           | 3.0         | 11.0         | cfs             |

118520-UD-Inlet\_v4.05, DP-10 3/30/2021, 4:13 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)
RETREAT AT TIMBERRIDGE FILING NO. 2
DP-11


Project: Inlet ID:

STREET

| d <sub>MAX</sub> =    | 6.0  Minor Storm                                                 | 12.0 Major Storm                                                                                                                                         | inches                                                                                                                                                                                                                                                                                                                        |
|-----------------------|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a <sub>MAX</sub> =    | 6.0                                                              |                                                                                                                                                          | inches                                                                                                                                                                                                                                                                                                                        |
| a <sub>MAX</sub> =    | 6.0                                                              | 12.0                                                                                                                                                     | inches                                                                                                                                                                                                                                                                                                                        |
|                       | 0.0                                                              | 40.0                                                                                                                                                     | the other and                                                                                                                                                                                                                                                                                                                 |
| T <sub>MAX</sub> =    | 17.0                                                             | 17.0                                                                                                                                                     | ft                                                                                                                                                                                                                                                                                                                            |
| _                     | Minor Storm                                                      | Major Storm                                                                                                                                              | _                                                                                                                                                                                                                                                                                                                             |
| n <sub>STREET</sub> = | 0.016                                                            | 1                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                               |
| _                     | 0.000                                                            | ft/ft                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                               |
|                       | 0.083                                                            | ft/ft                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                               |
|                       | 0.020                                                            | ft/ft                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                               |
| W =                   | 2.00                                                             | ft                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                               |
| T <sub>CROWN</sub> =  | 17.0                                                             | ft                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                               |
| H <sub>CURB</sub> =   | 6.00                                                             | inches                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                               |
| n <sub>BACK</sub> =   | 0.013                                                            | ]                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                               |
| S <sub>BACK</sub> =   | 0.020                                                            | ft/ft                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                               |
| T <sub>BACK</sub> =   | 12.5                                                             | ft                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                               |
|                       | SBACK =  nBACK =  HCURB =  TCROWN =  SX =  SW =  SO =  nSTREET = | SBACK = 0.020  nBACK = 0.013  H_CURB = 6.00  T_CROWN = 17.0  W = 2.00  S_X = 0.020  S_W = 0.083  S_O = 0.000  nSTREET = 0.016  Minor Storm  T_MAX = 17.0 | S <sub>BACK</sub> = 0.020 ft/ft  n <sub>BACK</sub> = 0.013 ft/ft  H <sub>CURB</sub> = 6.00 inches  T <sub>CROWN</sub> = 17.0 ft  W = 2.00 ft/ft  S <sub>X</sub> = 0.020 ft/ft  S <sub>W</sub> = 0.083 ft/ft  S <sub>O</sub> = 0.000 ft/ft  N <sub>STREET</sub> = 0.016  Minor Storm Major Storm  T <sub>MAX</sub> = 17.0 17.0 |

118520-UD-Inlet\_v4.05, DP-11 3/30/2021, 4:14 PM

Version 4.05 Released March 2017



| Design Information (Input)           | CDOT Type R Curb Opening                    | 1                            | MINOR       | MAJOR          |                 |
|--------------------------------------|---------------------------------------------|------------------------------|-------------|----------------|-----------------|
| Type of Inlet                        | CDOT Type R Curb Opening                    | Type =                       | CDOT Type F | R Curb Opening |                 |
| Local Depression (additional to co   | ontinuous gutter depression 'a' from above) | a <sub>local</sub> =         | 3.00        | 3.00           | inches          |
| Number of Unit Inlets (Grate or C    | urb Opening)                                | No =                         | 1           | 1              |                 |
| Water Depth at Flowline (outside     | of local depression)                        | Ponding Depth =              | 6.0         | 12.0           | inches          |
| Grate Information                    |                                             |                              | MINOR       | MAJOR          | Override Depths |
| Length of a Unit Grate               |                                             | L <sub>0</sub> (G) =         | N/A         | N/A            | feet            |
| Width of a Unit Grate                |                                             | W <sub>o</sub> =             | N/A         | N/A            | feet            |
| Area Opening Ratio for a Grate (t    | ypical values 0.15-0.90)                    | A <sub>ratio</sub> =         | N/A         | N/A            |                 |
| Clogging Factor for a Single Grate   | e (typical value 0.50 - 0.70)               | C <sub>f</sub> (G) =         | N/A         | N/A            |                 |
| Grate Weir Coefficient (typical val  | lue 2.15 - 3.60)                            | C <sub>w</sub> (G) =         | N/A         | N/A            |                 |
| Grate Orifice Coefficient (typical v | ralue 0.60 - 0.80)                          | C <sub>o</sub> (G) =         | N/A         | N/A            |                 |
| Curb Opening Information             |                                             |                              | MINOR       | MAJOR          | _               |
| Length of a Unit Curb Opening        |                                             | L <sub>o</sub> (C) =         | 5.00        | 5.00           | feet            |
| Height of Vertical Curb Opening in   | n Inches                                    | H <sub>vert</sub> =          | 6.00        | 6.00           | inches          |
| Height of Curb Orifice Throat in In  | ches                                        | H <sub>throat</sub> =        | 6.00        | 6.00           | inches          |
| Angle of Throat (see USDCM Fig       | ure ST-5)                                   | Theta =                      | 63.40       | 63.40          | degrees         |
| Side Width for Depression Pan (ty    | pically the gutter width of 2 feet)         | W <sub>p</sub> =             | 2.00        | 2.00           | feet            |
| Clogging Factor for a Single Curb    | Opening (typical value 0.10)                | $C_f(C) =$                   | 0.10        | 0.10           |                 |
| Curb Opening Weir Coefficient (ty    | pical value 2.3-3.7)                        | $C_w(C) =$                   | 3.60        | 3.60           |                 |
| Curb Opening Orifice Coefficient     | (typical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =         | 0.67        | 0.67           |                 |
| Low Head Performance Reduct          | ion (Calculated)                            |                              | MINOR       | MAJOR          |                 |
| Depth for Grate Midwidth             |                                             | d <sub>Grate</sub> =         | N/A         | N/A            | ft              |
| Depth for Curb Opening Weir Equ      | uation                                      | d <sub>Curb</sub> =          | 0.33        | 0.83           | ft              |
| Combination Inlet Performance R      | eduction Factor for Long Inlets             | RF <sub>Combination</sub> =  | 0.77        | 1.00           |                 |
| Curb Opening Performance Redu        | ction Factor for Long Inlets                | RF <sub>Curb</sub> =         | 1.00        | 1.00           |                 |
| Grated Inlet Performance Reducti     | on Factor for Long Inlets                   | RF <sub>Grate</sub> =        | N/A         | N/A            |                 |
|                                      |                                             | _                            | MINOR       | MAJOR          | _               |
| Total Inlet Interception Ca          | apacity (assumes clogged condition)         | Q <sub>a</sub> =             | 5.4         | 12.3           | cfs             |
| Inlet Capacity IS GOOD for Mine      | or and Major Storms(>Q PEAK)                | Q <sub>PEAK REQUIRED</sub> = | 2.0         | 4.0            | cfs             |

118520-UD-Inlet\_v4.05, DP-11 3/30/2021, 4:14 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)
RETREAT AT TIMBERRIDGE FILING NO. 2
DP-12

Project: Inlet ID:


STREET

| MAJOR STORM Allowable Capacity is based on Spread Criterion  Minor storm max. allowable capacity GOOD - greater than the design flow given on | Q <sub>allow</sub> =                  | 16.1        | 16.1           | cfs          |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------|----------------|--------------|
| MINOR STORM Allowable Capacity is based on Spread Criterion                                                                                   |                                       | Minor Storm | Major Storm    |              |
| Allow Flow Depth at Street Crown (leave blank for no)                                                                                         |                                       | E.I         | 1              | check – yes  |
| Allow Flow Depth at Street Crown (leave blank for no)                                                                                         | UMAX —                                | 6.0         | 12.0           | check = ves  |
| Max. Allowable Spread for Minor & Major Storm  Max. Allowable Depth at Gutter Flowline for Minor & Major Storm                                | T <sub>MAX</sub> = d <sub>MAX</sub> = | 17.0<br>6.0 | 17.0<br>12.0   | ft<br>inches |
|                                                                                                                                               | <b>-</b> -                            | Minor Storm | Major Storm    | 70           |
| walling 5 roughless to direct decitor (typically between 0.012 and 0.020)                                                                     | ··SIREE!                              | 0.010       | ı              |              |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020)                                                                    | n <sub>STREET</sub> =                 | 0.022       | IVIL           |              |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)  Street Longitudinal Slope - Enter 0 for sump condition                 | S <sub>0</sub> =                      | 0.083       | ft/ft<br>ft/ft |              |
| Street Transverse Slope                                                                                                                       | S <sub>X</sub> =<br>S <sub>W</sub> =  | 0.020       | ft/ft          |              |
| Gutter Width                                                                                                                                  | W =                                   | 2.00        | ft             |              |
| Distance from Curb Face to Street Crown                                                                                                       | T <sub>CROWN</sub> =                  | 17.0        | ft             |              |
| Height of Curb at Gutter Flow Line                                                                                                            | H <sub>CURB</sub> =                   | 6.00        | inches         |              |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020)                                                                           | n <sub>BACK</sub> =                   | 0.013       |                |              |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb)                                                                     | S <sub>BACK</sub> =                   | 0.020       | ft/ft          |              |
| Maximum Allowable Width for Spread Behind Curb                                                                                                | T <sub>BACK</sub> =                   | 12.5        | ft             |              |

118520-UD-Inlet\_v4.05, DP-12 3/30/2021, 4:14 PM

# INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

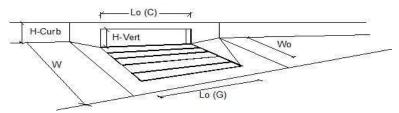

| Design Information (Input)  CDOT Type R Curb Opening                                   |                         | MINOR       | MAJOR          |        |
|----------------------------------------------------------------------------------------|-------------------------|-------------|----------------|--------|
| Type of Inlet                                                                          | Type =                  | CDOT Type R | R Curb Opening |        |
| Local Depression (additional to continuous gutter depression 'a') a <sub>LOCAL</sub> = |                         | 3.0         | 3.0            | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening)                             | No =                    | 1           | 1              |        |
| Length of a Single Unit Inlet (Grate or Curb Opening)                                  | L <sub>o</sub> =        | 10.00       | 10.00          | ft     |
| Width of a Unit Grate (cannot be greater than W, Gutter Width)                         | W <sub>o</sub> =        | N/A         | N/A            | ft     |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5)                     | C <sub>f</sub> -G =     | N/A         | N/A            |        |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)              | C <sub>f</sub> -C =     | 0.10        | 0.10           |        |
| Street Hydraulics: OK - Q < Allowable Street Capacity'                                 | _                       | MINOR       | MAJOR          | _      |
| Total Inlet Interception Capacity                                                      | Q =                     | 4.0         | 6.7            | cfs    |
| Total Inlet Carry-Over Flow (flow bypassing inlet)                                     | <b>Q</b> <sub>b</sub> = | 0.0         | 2.3            | cfs    |
| Capture Percentage = Q <sub>a</sub> /Q <sub>o</sub> =                                  | C% =                    | 99          | 75             | %      |

118520-UD-Inlet\_v4.05, DP-12 3/30/2021, 4:14 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)
RETREAT AT TIMBERRIDGE FILING NO. 2

Project: Inlet ID:


## DP-13

STREET

#### Gutter Geometry (Enter data in the blue cells) Maximum Allowable Width for Spread Behind Curb T<sub>BACK</sub> = 12.5 Side Slope Behind Curb (leave blank for no conveyance credit behind curb) $S_{\text{BACK}}$ 0.020 Manning's Roughness Behind Curb (typically between 0.012 and 0.020) 0.013 Height of Curb at Gutter Flow Line H<sub>CURB</sub> : 6.00 inches Distance from Curb Face to Street Crown T<sub>CROWN</sub> 17.0 Gutter Width w : 2.00 Street Transverse Slope S<sub>X</sub> = 0.020 ft/ft S<sub>W</sub> Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) ft/ft 0.083 Street Longitudinal Slope - Enter 0 for sump condition So 0.000 ft/ft Manning's Roughness for Street Section (typically between 0.012 and 0.020) n<sub>STREET</sub> = 0.016 Minor Storm Major Storm Max. Allowable Spread for Minor & Major Storm 17.0 17.0 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm 6.0 12.0 Check boxes are not applicable in SUMP conditions MINOR STORM Allowable Capacity is based on Depth Criterion Major Storm Minor Storm MAJOR STORM Allowable Capacity is based on Depth Criterion SUMP SUMP

118520-UD-Inlet v4.05, DP-13 3/30/2021, 4:14 PM

Version 4.05 Released March 2017



| Design Information (Input)           | CDOT Type R Curb Opening                    | Ī                            | MINOR       | MAJOR          |                 |
|--------------------------------------|---------------------------------------------|------------------------------|-------------|----------------|-----------------|
| Type of Inlet                        | CDOT Type R Curb Opening                    | Type =                       | CDOT Type F | R Curb Opening |                 |
| Local Depression (additional to co   | ontinuous gutter depression 'a' from above) | a <sub>local</sub> =         | 3.00        | 3.00           | inches          |
| Number of Unit Inlets (Grate or C    | urb Opening)                                | No =                         | 1           | 1              |                 |
| Water Depth at Flowline (outside     | of local depression)                        | Ponding Depth =              | 6.0         | 12.0           | inches          |
| Grate Information                    |                                             |                              | MINOR       | MAJOR          | Override Depths |
| Length of a Unit Grate               |                                             | L <sub>0</sub> (G) =         | N/A         | N/A            | feet            |
| Width of a Unit Grate                |                                             | W <sub>o</sub> =             | N/A         | N/A            | feet            |
| Area Opening Ratio for a Grate (t    | ypical values 0.15-0.90)                    | A <sub>ratio</sub> =         | N/A         | N/A            |                 |
| Clogging Factor for a Single Grat    | e (typical value 0.50 - 0.70)               | C <sub>f</sub> (G) =         | N/A         | N/A            |                 |
| Grate Weir Coefficient (typical va   | lue 2.15 - 3.60)                            | C <sub>w</sub> (G) =         | N/A         | N/A            |                 |
| Grate Orifice Coefficient (typical v | /alue 0.60 - 0.80)                          | C <sub>o</sub> (G) =         | N/A         | N/A            |                 |
| Curb Opening Information             |                                             |                              | MINOR       | MAJOR          |                 |
| Length of a Unit Curb Opening        |                                             | L <sub>0</sub> (C) =         | 15.00       | 15.00          | feet            |
| Height of Vertical Curb Opening i    | n Inches                                    | H <sub>vert</sub> =          | 6.00        | 6.00           | inches          |
| Height of Curb Orifice Throat in Ir  | nches                                       | H <sub>throat</sub> =        | 6.00        | 6.00           | inches          |
| Angle of Throat (see USDCM Fig       | ure ST-5)                                   | Theta =                      | 63.40       | 63.40          | degrees         |
| Side Width for Depression Pan (t     | ypically the gutter width of 2 feet)        | W <sub>p</sub> =             | 2.00        | 2.00           | feet            |
| Clogging Factor for a Single Curb    | Opening (typical value 0.10)                | $C_f(C) =$                   | 0.10        | 0.10           |                 |
| Curb Opening Weir Coefficient (ty    | ypical value 2.3-3.7)                       | C <sub>w</sub> (C) =         | 3.60        | 3.60           |                 |
| Curb Opening Orifice Coefficient     | (typical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =         | 0.67        | 0.67           |                 |
| Low Head Performance Reduct          | ion (Calculated)                            |                              | MINOR       | MAJOR          |                 |
| Depth for Grate Midwidth             |                                             | d <sub>Grate</sub> =         | N/A         | N/A            | ft              |
| Depth for Curb Opening Weir Equ      | uation                                      | d <sub>Curb</sub> =          | 0.33        | 0.83           | ft              |
| Combination Inlet Performance R      | eduction Factor for Long Inlets             | RF <sub>Combination</sub> =  | 0.57        | 1.00           |                 |
| Curb Opening Performance Redu        | iction Factor for Long Inlets               | RF <sub>Curb</sub> =         | 0.79        | 1.00           |                 |
| Grated Inlet Performance Reducti     | ion Factor for Long Inlets                  | RF <sub>Grate</sub> =        | N/A         | N/A            |                 |
|                                      |                                             |                              | MINOR       | MAJOR          | _               |
| Total Inlet Interception Ca          | apacity (assumes clogged condition)         | Q <sub>a</sub> =             | 9.7         | 39.1           | cfs             |
| Inlet Capacity IS GOOD for Min       | or and Major Storms(>Q PEAK)                | Q <sub>PEAK REQUIRED</sub> = | 8.0         | 24.3           | cfs             |

118520-UD-Inlet\_v4.05, DP-13 3/30/2021, 4:14 PM

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

RETREAT AT TIMBERRIDGE FILING NO. 2

DP-14


Project: Inlet ID:

STREET

| Gutter Geometry (Enter data in the blue cells)                             |                                    |
|----------------------------------------------------------------------------|------------------------------------|
| Maximum Allowable Width for Spread Behind Curb                             | T <sub>BACK</sub> = 12.5 ft        |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb)  | $S_{BACK} = 0.020$ ft/ft           |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020)        | n <sub>BACK</sub> = 0.013          |
| Height of Curb at Gutter Flow Line                                         | H <sub>CURB</sub> = 6.00 inches    |
| Distance from Curb Face to Street Crown                                    | $T_{CROWN} = 17.0$ ft              |
| Gutter Width                                                               | W = 2.00 ft                        |
| Street Transverse Slope                                                    | $S_X = 0.020$ ft/ft                |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)      | S <sub>w</sub> = 0.083 ft/ft       |
| Street Longitudinal Slope - Enter 0 for sump condition                     | $S_0 = 0.000$ ft/ft                |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | n <sub>STREET</sub> = 0.016        |
|                                                                            | Minor Storm Major Storm            |
| Max. Allowable Spread for Minor & Major Storm                              | T <sub>MAX</sub> = 17.0 17.0 ft    |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm            | d <sub>MAX</sub> = 6.0 12.0 inches |
| Check boxes are not applicable in SUMP conditions                          |                                    |
| MINOR STORM Allowable Capacity is based on Depth Criterion                 | Minor Storm Major Storm            |
| MAJOR STORM Allowable Capacity is based on Depth Criterion                 | Q <sub>allow</sub> = SUMP SUMP cfs |

118520-UD-Inlet\_v4.05, DP-14 3/30/2021, 4:14 PM

Version 4.05 Released March 2017




| Design Information (Input)           | CDOT Type R Curb Opening   ▼                | ·                            | MINOR       | MAJOR          |                 |
|--------------------------------------|---------------------------------------------|------------------------------|-------------|----------------|-----------------|
| Type of Inlet                        | CDOT Type R Curb Opening                    | Type =                       | CDOT Type F | R Curb Opening |                 |
| Local Depression (additional to co   | ontinuous gutter depression 'a' from above) | a <sub>local</sub> =         | 3.00        | 3.00           | inches          |
| Number of Unit Inlets (Grate or C    | urb Opening)                                | No =                         | 1           | 1              |                 |
| Water Depth at Flowline (outside     | of local depression)                        | Ponding Depth =              | 6.0         | 12.0           | inches          |
| Grate Information                    |                                             |                              | MINOR       | MAJOR          | Override Depths |
| Length of a Unit Grate               |                                             | L <sub>0</sub> (G) =         | N/A         | N/A            | feet            |
| Width of a Unit Grate                |                                             | W <sub>o</sub> =             | N/A         | N/A            | feet            |
| Area Opening Ratio for a Grate (t    | ypical values 0.15-0.90)                    | A <sub>ratio</sub> =         | N/A         | N/A            |                 |
| Clogging Factor for a Single Grat    | e (typical value 0.50 - 0.70)               | C <sub>f</sub> (G) =         | N/A         | N/A            |                 |
| Grate Weir Coefficient (typical va   | lue 2.15 - 3.60)                            | C <sub>w</sub> (G) =         | N/A         | N/A            |                 |
| Grate Orifice Coefficient (typical v | ralue 0.60 - 0.80)                          | C <sub>o</sub> (G) =         | N/A         | N/A            |                 |
| Curb Opening Information             |                                             |                              | MINOR       | MAJOR          | _               |
| Length of a Unit Curb Opening        |                                             | L <sub>0</sub> (C) =         | 5.00        | 5.00           | feet            |
| Height of Vertical Curb Opening i    | n Inches                                    | H <sub>vert</sub> =          | 6.00        | 6.00           | inches          |
| Height of Curb Orifice Throat in Ir  | ches                                        | H <sub>throat</sub> =        | 6.00        | 6.00           | inches          |
| Angle of Throat (see USDCM Fig       | ure ST-5)                                   | Theta =                      | 63.40       | 63.40          | degrees         |
| Side Width for Depression Pan (t     | pically the gutter width of 2 feet)         | W <sub>p</sub> =             | 2.00        | 2.00           | feet            |
| Clogging Factor for a Single Curb    | Opening (typical value 0.10)                | $C_f(C) =$                   | 0.10        | 0.10           |                 |
| Curb Opening Weir Coefficient (ty    | pical value 2.3-3.7)                        | C <sub>w</sub> (C) =         | 3.60        | 3.60           |                 |
| Curb Opening Orifice Coefficient     | (typical value 0.60 - 0.70)                 | C <sub>o</sub> (C) =         | 0.67        | 0.67           |                 |
| Low Head Performance Reduct          | ion (Calculated)                            |                              | MINOR       | MAJOR          |                 |
| Depth for Grate Midwidth             |                                             | d <sub>Grate</sub> =         | N/A         | N/A            | ft              |
| Depth for Curb Opening Weir Equ      | uation                                      | d <sub>Curb</sub> =          | 0.33        | 0.83           | ft              |
| Combination Inlet Performance R      | eduction Factor for Long Inlets             | RF <sub>Combination</sub> =  | 0.77        | 1.00           |                 |
| Curb Opening Performance Redu        | ction Factor for Long Inlets                | RF <sub>Curb</sub> =         | 1.00        | 1.00           |                 |
| Grated Inlet Performance Reducti     | on Factor for Long Inlets                   | RF <sub>Grate</sub> =        | N/A         | N/A            |                 |
|                                      |                                             | _                            | MINOR       | MAJOR          | _               |
| Total Inlet Interception Ca          | apacity (assumes clogged condition)         | Q <sub>a</sub> =             | 5.4         | 12.3           | cfs             |
| Inlet Capacity IS GOOD for Min       | or and Major Storms(>Q PEAK)                | Q <sub>PEAK REQUIRED</sub> = | 1.0         | 3.0            | cfs             |

118520-UD-Inlet\_v4.05, DP-14 3/30/2021, 4:14 PM

# **EXISTING DUAL 30 IN. RCP CULVERTS AT DP 1**

| Invert Elev Dn (ft) | = 7228.28                           | Calculations        |                 |
|---------------------|-------------------------------------|---------------------|-----------------|
| Pipe Length (ft)    | = 60.86                             | Qmin (cfs)          | = 0.00          |
| Slope (%)           | = 1.00                              | Qmax (cfs)          | = 57.00         |
| Invert Elev Up (ft) | = 7228.89                           | Tailwater Elev (ft) | = (dc+D)/2      |
| Rise (in)           | = 30.0                              |                     |                 |
| Shape               | = Circular                          | Highlighted         |                 |
| Span (in)           | = 30.0                              | Qtotal (cfs)        | = 57.00         |
| No. Barrels         | = 2                                 | Qpipe (cfs)         | = 57.00         |
| n-Value             | = 0.013                             | Qovertop (cfs)      | = 0.00          |
| Culvert Type        | <ul><li>Circular Concrete</li></ul> | Veloc Dn (ft/s)     | = 6.32          |
| Culvert Entrance    | = Square edge w/headwall (C)        | Veloc Up (ft/s)     | = 7.45          |
| Coeff. K,M,c,Y,k    | = 0.0098, 2, 0.0398, 0.67, 0.5      | HGL Dn (ft)         | = 7230.44       |
|                     |                                     | HGL Up (ft)         | = 7230.71       |
| Embankment          |                                     | Hw Elev (ft)        | = 7231.89       |
| Top Elevation (ft)  | = 7234.30                           | Hw/D (ft)           | = 1.20          |
| Top Width (ft)      | = 50.00                             | Flow Regime         | = Inlet Control |
| Crest Width (ft)    | = 50.00                             |                     |                 |
|                     |                                     |                     |                 |

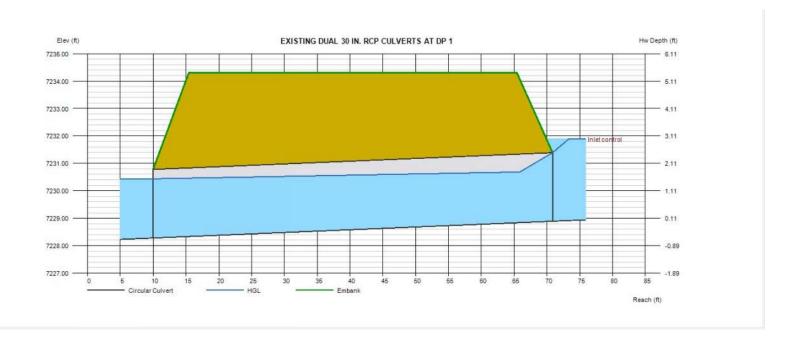


# DETERMINATION OF CULVERT HEADWATER AND OUTLET PROTECTION

MHFD-Culvert, Version 4.00 (May 2020)

Project: Retreat at TimberRidge Filing No. 2

ID: DP-1 (Exist. Dual 30" Culverts)

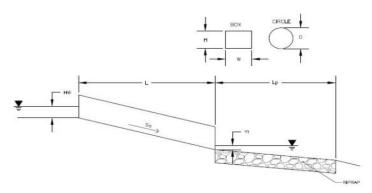



|                          |                                                   | al Flow! Using Adjusted Dia | ameter to cale   | culate protection type. |
|--------------------------|---------------------------------------------------|-----------------------------|------------------|-------------------------|
| Design Infor             | mation:                                           |                             |                  |                         |
|                          | Design Discharge                                  | Q =                         | 57               | cfs                     |
|                          |                                                   | _                           |                  |                         |
| Circular Culve           | ert:                                              |                             |                  |                         |
|                          | Barrel Diameter in Inches                         | D =                         | 30               | inches                  |
|                          | Inlet Edge Type (Choose from pull-down list)      | Grooved                     | d Edge Projectii | ng                      |
| <u>OF</u>                | <u>₹:</u>                                         |                             |                  |                         |
| Box Culvert:             |                                                   |                             | OR               |                         |
|                          | Barrel Height (Rise) in Feet                      | H (Rise) =                  |                  | ft                      |
|                          | Barrel Width (Span) in Feet                       | W (Span) =                  |                  | ft                      |
|                          | Inlet Edge Type (Choose from pull-down list)      | · · · / <u>-</u>            |                  | <u> </u>                |
|                          | - ,, ,                                            |                             |                  |                         |
|                          | Number of Barrels                                 | # Barrels =                 | 2                |                         |
|                          | Inlet Elevation                                   | Elev IN =                   | 7228.89          | <b>T</b> ft             |
|                          | Outlet Elevation <b>OR</b> Slope                  | Elev OUT =                  | 7228.28          | ft                      |
|                          | Culvert Length                                    | L =                         | 60.68            | ft                      |
|                          | Manning's Roughness                               | n =                         | 0.013            |                         |
|                          | Bend Loss Coefficient                             | k <sub>b</sub> =            | 0                |                         |
|                          | Exit Loss Coefficient                             | k <sub>x</sub> =            | 1                |                         |
|                          | Tailwater Surface Elevation                       | Y <sub>t, Elevation</sub> = |                  | H <sub>ft</sub>         |
|                          | Max Allowable Channel Velocity                    | V =                         | 5                | ft/s                    |
|                          |                                                   | • –                         |                  |                         |
| Calculated R             | esults:                                           |                             |                  |                         |
| <del>carcaratea re</del> | Culvert Cross Sectional Area Available            | A = [                       | 4.91             | ∏ft²                    |
|                          | Culvert Normal Depth                              | Y <sub>n</sub> =            | 1.53             | ⊢it                     |
|                          | Culvert Critical Depth                            | Y <sub>c</sub> =            | 1.82             | ⊢it                     |
|                          | Froude Number                                     | Fr =                        | 1.40             | Supercritical!          |
|                          | Entrance Loss Coefficient                         | k <sub>e</sub> =            | 0.20             | Supercriticals          |
|                          | Friction Loss Coefficient                         | k <sub>f</sub> =            | 0.56             | -                       |
|                          | Sum of All Loss Coefficients                      | k <sub>s</sub> =            | 1.76             | ft                      |
|                          | Sum of All Loss Coefficients                      | ν <sub>s</sub> –            | 1.70             |                         |
| Headwater:               |                                                   |                             |                  |                         |
| readwaterr               | Inlet Control Headwater                           | HW <sub>T</sub> =           | 2.79             | Tft .                   |
|                          | Outlet Control Headwater                          | HW <sub>O</sub> =           | 2.37             | ⊢¦t                     |
|                          | Design Headwater Elevation                        | HW =                        | 7231.68          |                         |
|                          | Headwater/Diameter <u>OR</u> Headwater/Rise Ratio | HW/D =                      | 1.11             | <b>⊣</b> "              |
|                          |                                                   | ,2 – _                      |                  |                         |
| Outlet Protect           | tion:                                             |                             |                  |                         |
|                          | Flow/(Diameter^2.5)                               | Q/D^2.5 =                   | 2.88             | ft <sup>0.5</sup> /s    |
|                          | Tailwater Surface Height                          | Y <sub>t</sub> =            | 1.00             | ft '                    |
|                          | Tailwater/Diameter                                | Yt/D =                      | 0.40             |                         |
|                          | Expansion Factor                                  | $1/(2*tan(\Theta)) =$       | 4.54             |                         |
|                          | Flow Area at Max Channel Velocity                 | A <sub>t</sub> =            | 11.40            | H <sub>ft²</sub>        |
|                          | Width of Equivalent Conduit for Multiple Barrels  | W <sub>eq</sub> =           | 5.00             | ⊢it                     |
|                          | Length of Riprap Protection                       | L <sub>p</sub> =            | 25               | ⊣n.<br>Ht               |
|                          | Width of Riprap Protection at Downstream End      | T =                         | 11               | ft                      |
|                          | Adjusted Diameter for Supercritical Flow          | Da =                        | 2.02             | ∏ft                     |
|                          | Minimum Theoretical Riprap Size                   | d <sub>50</sub> min=        | 6                | in in                   |
|                          | Nominal Riprap Size                               | d <sub>50</sub> nominal=    | 9                | ⊢ '''                   |
|                          |                                                   |                             | 9<br>            | ⊢ "'                    |
|                          | MHFD Riprap Type                                  | Type =                      | L                |                         |


Crest Width (ft)

= 50.00


Friday, Sep 17 2021

# 24 in. RCP Culvert at DP 2

| Invert Elev Dn (ft) | = 7229.81                                    | Calculations        |                 |
|---------------------|----------------------------------------------|---------------------|-----------------|
| Pipe Length (ft)    | = 100.12                                     | Qmin (cfs)          | = 0.00          |
| Slope (%)           | = 1.00                                       | Qmax (cfs)          | = 20.00         |
| Invert Elev Up (ft) | = 7230.81                                    | Tailwater Elev (ft) | = (dc+D)/2      |
| Rise (in)           | = 24.0                                       |                     |                 |
| Shape               | = Circular                                   | Highlighted         |                 |
| Span (in)           | = 24.0                                       | Qtotal (cfs)        | = 20.00         |
| No. Barrels         | = 1                                          | Qpipe (cfs)         | = 20.00         |
| n-Value             | = 0.013                                      | Qovertop (cfs)      | = 0.00          |
| Culvert Type        | <ul><li>Circular Concrete</li></ul>          | Veloc Dn (ft/s)     | = 6.71          |
| Culvert Entrance    | <ul><li>Square edge w/headwall (C)</li></ul> | Veloc Up (ft/s)     | = 7.40          |
| Coeff. K,M,c,Y,k    | = 0.0098, 2, 0.0398, 0.67, 0.5               | HGL Dn (ft)         | = 7231.61       |
|                     |                                              | HGL Up (ft)         | = 7232.42       |
| Embankment          |                                              | Hw Elev (ft)        | = 7233.75       |
| Top Elevation (ft)  | = 7235.00                                    | Hw/D (ft)           | = 1.47          |
| Top Width (ft)      | = 40.00                                      | Flow Regime         | = Inlet Control |
|                     |                                              |                     |                 |

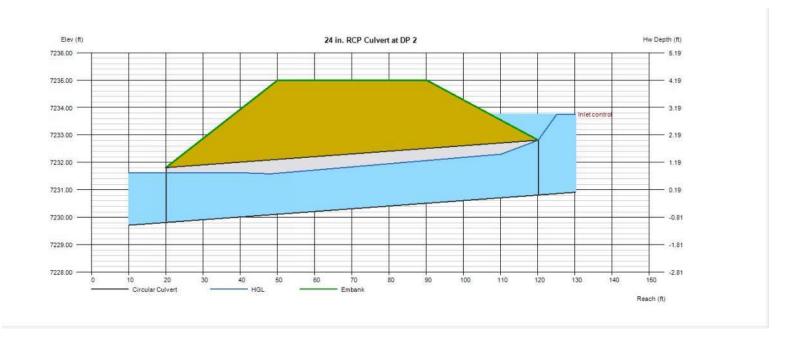

# DETERMINATION OF CULVERT HEADWATER AND OUTLET PROTECTION MHFD-Culvert, Version 4.00 (May 2020) Project: Retreat at TimberRidge Filing No. 2 ID: DP-2 (24" Culvert)

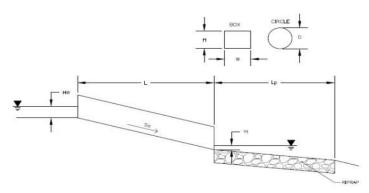



|                | Super                                               | critical Flow! Using Adjusted D                                                                               | nameter to cal    | culate protection type. |
|----------------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------|-------------------------|
| Design Infor   | mation:                                             |                                                                                                               |                   |                         |
|                | Design Discharge                                    | 0 =                                                                                                           | 20                | cfs                     |
|                | 3 3                                                 |                                                                                                               |                   |                         |
| Circular Culve | ort:                                                |                                                                                                               |                   |                         |
| 000.0          | Barrel Diameter in Inches                           | D = [                                                                                                         | 24                | inches                  |
|                | Inlet Edge Type (Choose from pull-down list)        | L                                                                                                             | ed Edge Projecti  |                         |
|                |                                                     | Gloov                                                                                                         | eu Luge Frojectii | ig                      |
| OF             | <u>u</u>                                            |                                                                                                               |                   |                         |
| Box Culvert:   |                                                     |                                                                                                               | OR                | <b>_</b>                |
|                | Barrel Height (Rise) in Feet                        | H (Rise) =                                                                                                    |                   | ft                      |
|                | Barrel Width (Span) in Feet                         | W (Span) =                                                                                                    |                   | ft                      |
|                | Inlet Edge Type (Choose from pull-down list)        |                                                                                                               |                   |                         |
|                |                                                     | _                                                                                                             |                   |                         |
|                | Number of Barrels                                   | # Barrels =                                                                                                   | 1                 |                         |
|                | Inlet Elevation                                     | Elev IN =                                                                                                     | 7230.81           | <b>T</b> ft             |
|                | Outlet Elevation OR Slope                           | Elev OUT =                                                                                                    | 7229.81           | ft                      |
|                | Culvert Length                                      | L =                                                                                                           | 100.12            | ft                      |
|                | Manning's Roughness                                 | n =                                                                                                           | 0.013             |                         |
|                | Bend Loss Coefficient                               | k <sub>b</sub> =                                                                                              | 0.015             |                         |
|                | Exit Loss Coefficient                               |                                                                                                               | 1                 | -                       |
|                | Tailwater Surface Elevation                         | k <sub>x</sub> =                                                                                              | 1                 | H <sub>ft</sub>         |
|                |                                                     | $Y_{t, Elevation} =$                                                                                          |                   |                         |
|                | Max Allowable Channel Velocity                      | V = [                                                                                                         | 5                 | ft/s                    |
|                |                                                     |                                                                                                               |                   |                         |
| Calculated R   |                                                     | r                                                                                                             |                   |                         |
|                | Culvert Cross Sectional Area Available              | A =                                                                                                           | 3.14              | ft²                     |
|                | Culvert Normal Depth                                | $Y_n = $                                                                                                      | 1.46              | ft                      |
|                | Culvert Critical Depth                              | $Y_c =$                                                                                                       | 1.61              | ft                      |
|                | Froude Number                                       | Fr =                                                                                                          | 1.22              | Supercritical!          |
|                | Entrance Loss Coefficient                           | k <sub>e</sub> =                                                                                              | 0.20              |                         |
|                | Friction Loss Coefficient                           | $k_f = 1$                                                                                                     | 1.24              |                         |
|                | Sum of All Loss Coefficients                        | k <sub>s</sub> =                                                                                              | 2.44              | T <sub>ft</sub>         |
|                |                                                     | 3 [                                                                                                           |                   |                         |
| Headwater:     |                                                     |                                                                                                               |                   |                         |
|                | Inlet Control Headwater                             | $HW_{T} = [$                                                                                                  | 2.65              | □ft                     |
|                | Outlet Control Headwater                            | HW <sub>o</sub> =                                                                                             | 2.34              | ⊢nt                     |
|                | Design Headwater Elevation                          | HW =                                                                                                          | 7233.46           | ⊢ <sub>ft</sub>         |
|                | Headwater/Diameter <u>OR</u> Headwater/Rise Ratio   | l de la companya de | 1.33              |                         |
|                | rieadwater/Diameter <u>OR</u> rieadwater/Rise Ratio | HW/D = [                                                                                                      | 1.33              |                         |
| Outlet Protect | tion:                                               |                                                                                                               |                   |                         |
|                | Flow/(Diameter^2.5)                                 | Q/D^2.5 =                                                                                                     | 3.54              | ft <sup>0.5</sup> /s    |
|                | Tailwater Surface Height                            | $Q/D^{-2.5} = Y_t = 0$                                                                                        | 0.80              | Ht. /s                  |
|                |                                                     | Yt/D =                                                                                                        |                   | <b></b>  ''             |
|                | Tailwater/Diameter                                  | 7                                                                                                             | 0.40              |                         |
|                | Expansion Factor                                    | 1/(2*tan(Θ)) =                                                                                                | 3.91              | 3                       |
|                | Flow Area at Max Channel Velocity                   | $A_t =$                                                                                                       | 4.00              | ft²                     |
|                | Width of Equivalent Conduit for Multiple Barrels    | $W_{eq} = $                                                                                                   | -                 | ft                      |
|                | Length of Riprap Protection                         | L <sub>p</sub> =                                                                                              | 12                | ft                      |
|                | Width of Riprap Protection at Downstream End        | T = [                                                                                                         | 6                 | ft                      |
|                |                                                     |                                                                                                               |                   |                         |
|                | Adjusted Diameter for Supercritical Flow            | Da =                                                                                                          | 1.73              | ft                      |
|                | Minimum Theoretical Riprap Size                     | d <sub>50</sub> min=                                                                                          | 6                 | in                      |
|                | Nominal Riprap Size                                 | d <sub>50</sub> nominal=                                                                                      | 9                 | in                      |
|                | MHFD Riprap Type                                    | Type =                                                                                                        | L                 |                         |
|                | r · r - 7 r ·                                       | -,,,,                                                                                                         |                   |                         |

# **Channel Report**

Hydraflow Express Extension for Autodesk® AutoCAD® Civil 3D® by Autodesk, Inc.


Sunday, Feb 6 2022

# Proposed Channel within Lot 7 - Outfall from 24 in. Culvert

**Trapezoidal** Highlighted Bottom Width (ft) = 0.44= 6.00Depth (ft) Side Slopes (z:1) = 3.00, 3.00Q (cfs) = 20.00Total Depth (ft) Area (sqft) = 1.50= 3.22Velocity (ft/s) = 7224.00Invert Elev (ft) = 6.21 Slope (%) = 6.00Wetted Perim (ft) = 8.78Crit Depth, Yc (ft) N-Value = 0.030= 0.63Top Width (ft) = 8.64EGL (ft) = 1.04


**Calculations** 

Compute by: Known Q = 20.00Known Q (cfs)

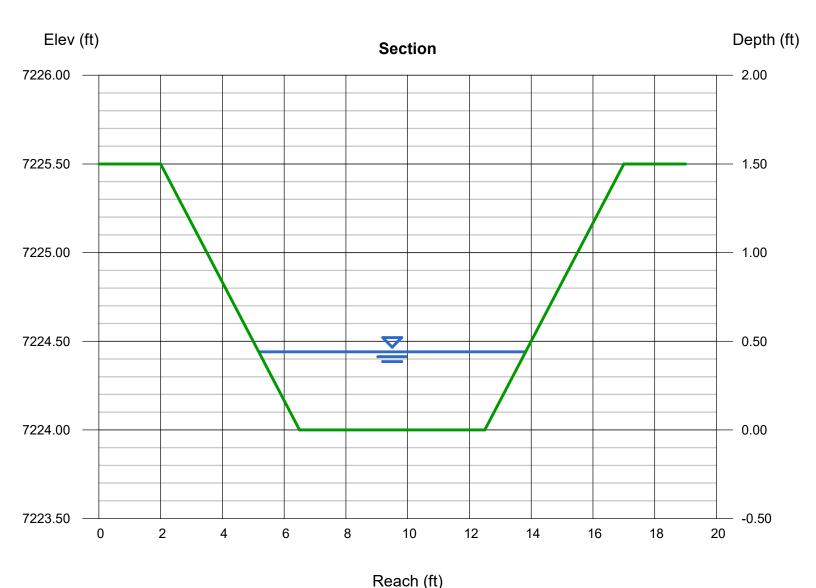


# 42 IN. RCP STORM SYSTEM AT DP 3

| Invert Elev Dn (ft) | = 7218.85                      | Calculations        |                 |
|---------------------|--------------------------------|---------------------|-----------------|
| Pipe Length (ft)    | = 39.91                        | Qmin (cfs)          | = 0.00          |
| Slope (%)           | = 2.88                         | Qmax (cfs)          | = 74.00         |
| Invert Elev Up (ft) | = 7220.00                      | Tailwater Elev (ft) | = (dc+D)/2      |
| Rise (in)           | = 42.0                         |                     |                 |
| Shape               | = Circular                     | Highlighted         |                 |
| Span (in)           | = 42.0                         | Qtotal (cfs)        | = 74.00         |
| No. Barrels         | = 1                            | Qpipe (cfs)         | = 74.00         |
| n-Value             | = 0.013                        | Qovertop (cfs)      | = 0.00          |
| Culvert Type        | = Circular Concrete            | Veloc Dn (ft/s)     | = 8.22          |
| Culvert Entrance    | = Square edge w/headwall (C)   | Veloc Up (ft/s)     | = 9.32          |
| Coeff. K,M,c,Y,k    | = 0.0098, 2, 0.0398, 0.67, 0.5 | HGL Dn (ft)         | = 7221.95       |
|                     |                                | HGL Up (ft)         | = 7222.69       |
| Embankment          |                                | Hw Elev (ft)        | = 7224.65       |
| Top Elevation (ft)  | = 7226.00                      | Hw/D (ft)           | = 1.33          |
| Top Width (ft)      | = 30.00                        | Flow Regime         | = Inlet Control |
| Crest Width (ft)    | = 50.00                        |                     |                 |
|                     |                                |                     |                 |

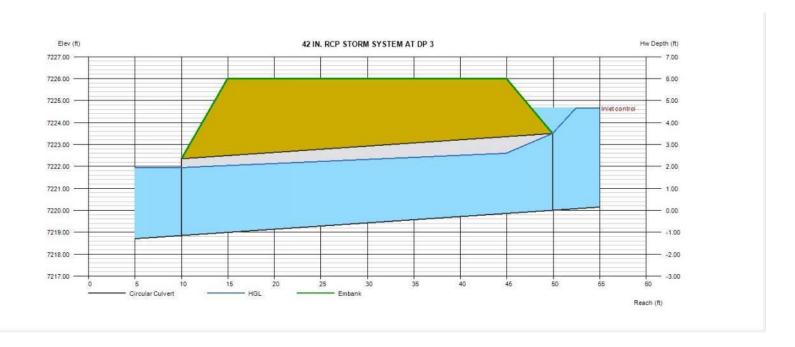

# 24 in. RCP Culvert at DP 4

| Invert Elev Dn (ft) | = 7218.67                                    | Calculations        |                 |
|---------------------|----------------------------------------------|---------------------|-----------------|
| Pipe Length (ft)    | = 8.87                                       | Qmin (cfs)          | = 0.00          |
| Slope (%)           | = 12.18                                      | Qmax (cfs)          | = 8.00          |
| Invert Elev Up (ft) | = 7219.75                                    | Tailwater Elev (ft) | = (dc+D)/2      |
| Rise (in)           | = 24.0                                       |                     |                 |
| Shape               | = Circular                                   | Highlighted         |                 |
| Span (in)           | = 24.0                                       | Qtotal (cfs)        | = 8.00          |
| No. Barrels         | = 1                                          | Qpipe (cfs)         | = 8.00          |
| n-Value             | = 0.013                                      | Qovertop (cfs)      | = 0.00          |
| Culvert Type        | <ul><li>Circular Concrete</li></ul>          | Veloc Dn (ft/s)     | = 3.16          |
| Culvert Entrance    | <ul><li>Square edge w/headwall (C)</li></ul> | Veloc Up (ft/s)     | = 5.06          |
| Coeff. K,M,c,Y,k    | = 0.0098, 2, 0.0398, 0.67, 0.5               | HGL Dn (ft)         | = 7220.17       |
|                     |                                              | HGL Up (ft)         | = 7220.76       |
| Embankment          |                                              | Hw Elev (ft)        | = 7221.10       |
| Top Elevation (ft)  | = 7223.16                                    | Hw/D (ft)           | = 0.67          |
| Top Width (ft)      | = 6.00                                       | Flow Regime         | = Inlet Control |
| Crest Width (ft)    | = 50.00                                      |                     |                 |
|                     |                                              |                     |                 |

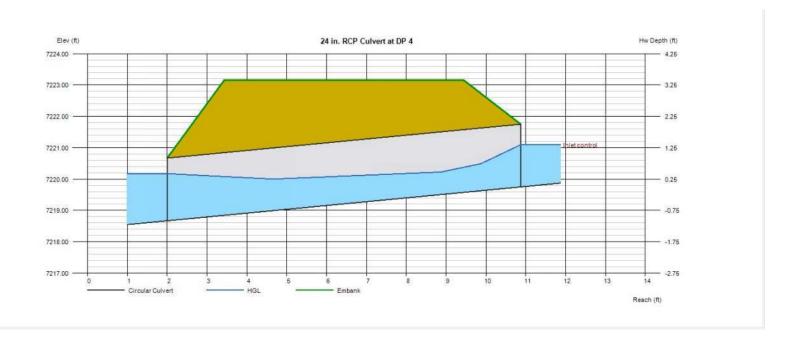

# **Channel Report**

Hydraflow Express Extension for Autodesk® AutoCAD® Civil 3D® by Autodesk, Inc.

Friday, Feb 4 2022

# Proposed Channel within Lot 7 - North side of Falcon Nest Ct.

 Trapezoidal

 Bottom Width (ft)
 = 12.00

 Side Slopes (z:1)
 = 4.00, 4.00

 Total Depth (ft)
 = 1.75


 Invert Elev (ft)
 = 7224.00

 Slope (%)
 = 6.00

 N-Value
 = 0.030

Calculations

Compute by: Known Q Known Q (cfs) = 79.00 Highlighted Depth (ft) = 0.66Q (cfs) = 79.00Area (sqft) = 9.66Velocity (ft/s) = 8.18 Wetted Perim (ft) = 17.44Crit Depth, Yc (ft) = 0.99Top Width (ft) = 17.28 EGL (ft) = 1.70

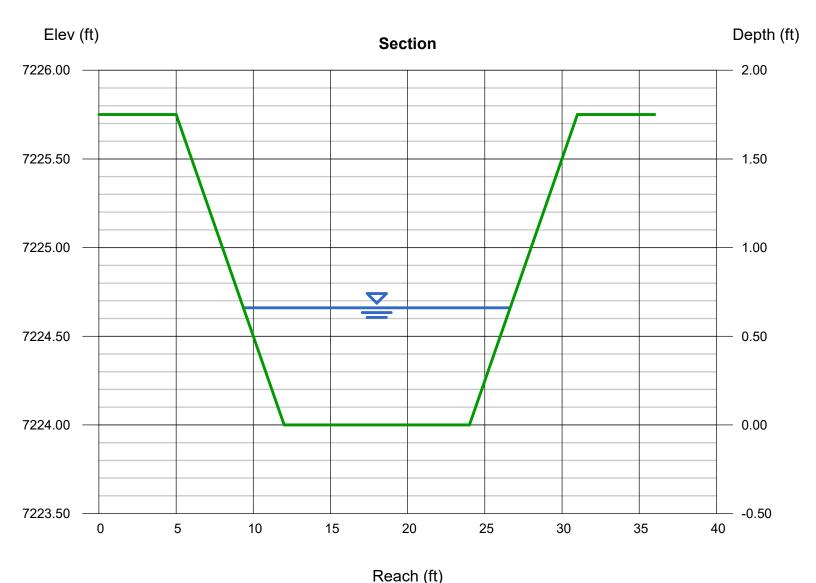

# DITCH CALCUALTIONS

# Proposed Channel within Lot 7 - North side of Falcon Nest Ct.

|                                           | Erosion Control Blanket (ECB)  | Turf Reinforcement Mat (TRM)  | Revegetation - Grass lined |
|-------------------------------------------|--------------------------------|-------------------------------|----------------------------|
|                                           | (North American Green - SC150) | (North American Green - P300) | (Native Seed Mix)          |
| Given:                                    | (Temporary - 24 months)        | (Permanent)                   |                            |
| Design Flow (cfs)                         | 74.0                           | 79.0                          | 74.0                       |
| Permissible Shear (lbs/ft. <sup>2</sup> ) | 2.0                            | 8.0                           | 0.1                        |
| Permissible Velocity (ft./sec.)           | 8.0                            | 16.0                          | 3.0                        |
| Safety Factor                             | 1                              | 1                             | 1                          |
| Ditch Slope (Max.)                        | 6.0%                           | 6.0%                          | 6.0%                       |
| Channel Section (18 in. depth             | Trapezoidal -Ditch             | Trapezoidal -Ditch            | Trapezoidal -Ditch         |
| 12' wide bottom w/ 4:1 sides)             |                                |                               |                            |
| Flow Area (ft. <sup>2</sup> )             | 9.32                           | 9.32                          | 9.32                       |
| Wetted Perimeter (ft.)                    | 17.28                          | 17.28                         | 17.28                      |
| Hydraulic Radius                          | 0.95                           | 0.95                          | 0.95                       |
| Mannings n                                | 0.035                          | 0.030                         | 0.030                      |
| Depth of Flow (max.)                      | 1.0                            | 1.0                           | 0.5                        |
| Calculations:                             |                                |                               |                            |
| Shear Stress (lbs/ft.²)                   | 3.7                            | 3.7                           | 1.9                        |
| Velocity (ft./sec.)                       | 7.9                            | 8.5                           | 7.9                        |
| Allowed Flow (cfs)                        | 93.9                           | 109.6                         | 109.6                      |

# **Channel Report**

Hydraflow Express Extension for Autodesk® AutoCAD® Civil 3D® by Autodesk, Inc.

Friday, Feb 4 2022

# Natural Swale adjacent to Lots 43-54

| Triangulai |
|------------|
|------------|

Side Slopes (z:1) = 4.00, 4.00Total Depth (ft) = 2.00


Invert Elev (ft) = 7220.00 Slope (%) = 4.00 N-Value = 0.035

Calculations

Compute by: Known Q Known Q (cfs) = 11.00

## Highlighted

= 0.79Depth (ft) Q (cfs) = 11.00 Area (sqft) = 2.50Velocity (ft/s) = 4.41 Wetted Perim (ft) = 6.51Crit Depth, Yc (ft) = 0.86Top Width (ft) = 6.32EGL (ft) = 1.09

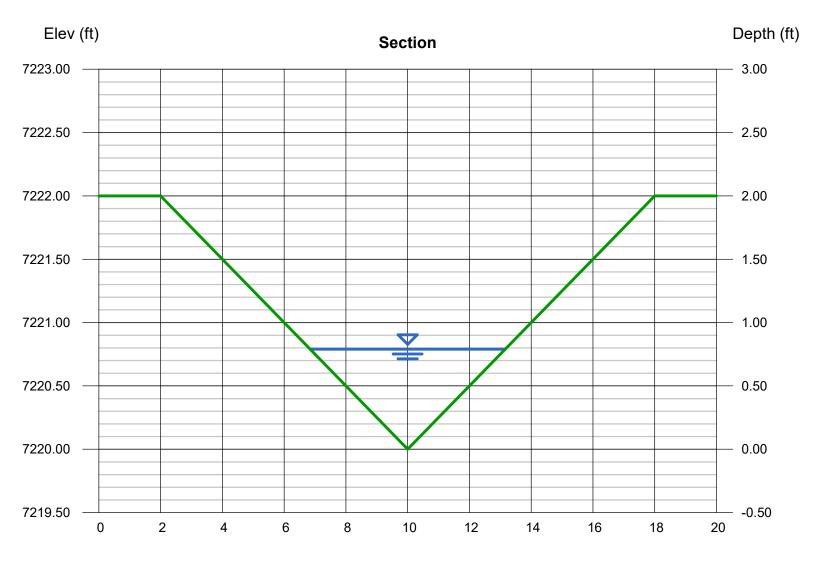

Reach (ft)

# **Channel Report**

Hydraflow Express Extension for Autodesk® AutoCAD® Civil 3D® by Autodesk, Inc.

Friday, Feb 4 2022

# Natural Swale adjacent to Lots 54-60

| I | r | ia | n | g | ļu | la | r |
|---|---|----|---|---|----|----|---|
|   |   |    |   |   |    |    |   |

Side Slopes (z:1) = 4.00, 4.00Total Depth (ft) = 2.00


Invert Elev (ft) = 7220.00 Slope (%) = 2.50 N-Value = 0.035

### Calculations


Compute by: Known Q Known Q (cfs) = 15.00

### Highlighted

= 0.97Depth (ft) Q (cfs) = 15.00 Area (sqft) = 3.76Velocity (ft/s) = 3.99Wetted Perim (ft) = 8.00Crit Depth, Yc (ft) = 0.98Top Width (ft) = 7.76EGL (ft) = 1.22

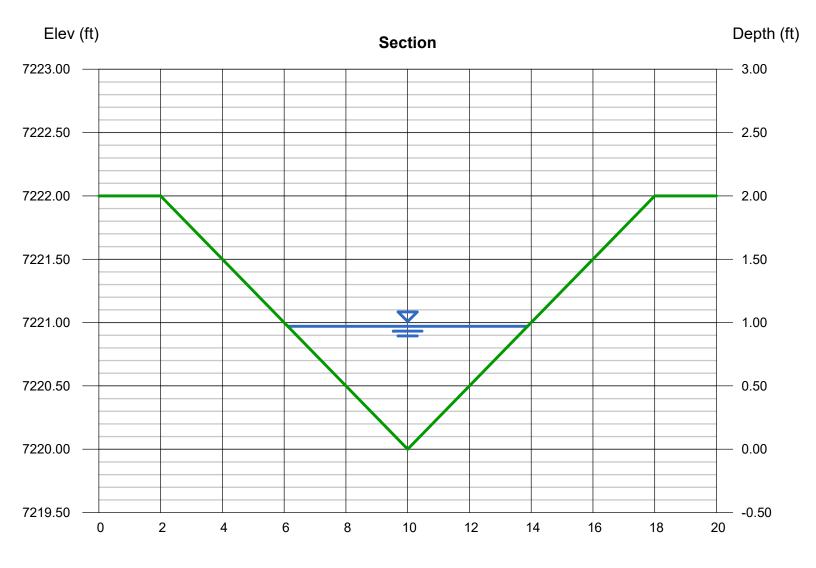

Reach (ft)

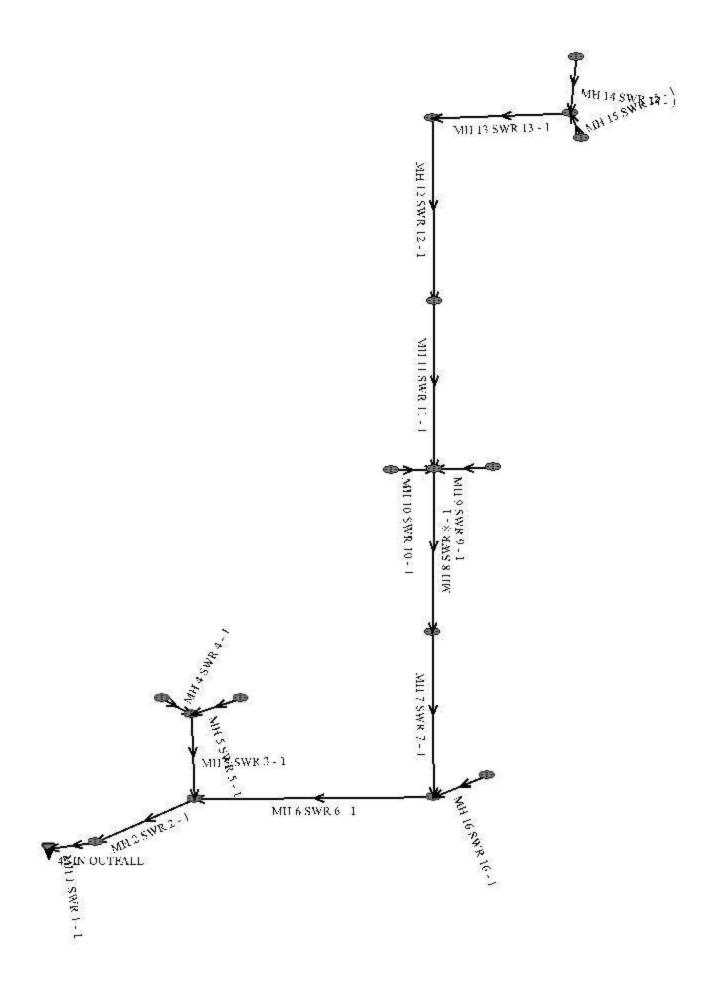

## 42" RCP Storm System into Exist. Pond 2 HGL Calcs.

## **System Input Summary**

### **Rainfall Parameters**

**Rainfall Return Period: 100** 

Rainfall Calculation Method: Table

| Time | Intensity |
|------|-----------|
| 5    | 8.68      |
| 10   | 6.93      |
| 20   | 5.19      |
| 30   | 4.16      |
| 40   | 3.44      |
| 60   | 2.42      |
| 120  | 0.67      |

#### **Rational Method Constraints**

**Minimum Urban Runoff Coeff.:** 0.20

Maximum Rural Overland Len. (ft): 500

Maximum Urban Overland Len. (ft): 300

**Used UDFCD Tc. Maximum:** Yes

### **Sizer Constraints**

Minimum Sewer Size (in): 18.00 Maximum Depth to Rise Ratio: 0.90 Maximum Flow Velocity (fps): 18.0 Minimum Flow Velocity (fps): 2.0

### **Backwater Calculations:**

**Tailwater Elevation (ft):** 7168.30

## **Manhole Input Summary:**

|                  |                             | Give                         | en Flow                        |                           |        | Sub Basir          | ı Informat                 | tion                     |      |                             |
|------------------|-----------------------------|------------------------------|--------------------------------|---------------------------|--------|--------------------|----------------------------|--------------------------|------|-----------------------------|
| Element<br>Name  | Ground<br>Elevation<br>(ft) | Total<br>Known<br>Flow (cfs) | Local<br>Contribution<br>(cfs) | Drainage<br>Area<br>(Ac.) | Kunoff | 5yr<br>Coefficient | Overland<br>Length<br>(ft) | Overland<br>Slope<br>(%) |      | Gutter<br>Velocity<br>(fps) |
| 42 IN OUTFALL    | 7166.50                     | 0.00                         | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 1 SWR 1 - 1   | 7173.70                     | 85.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 2 SWR 2 - 1   | 7185.90                     | 85.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 6 SWR 6 - 1   | 7200.24                     | 64.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 7 SWR 7 - 1   | 7213.98                     | 59.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 8 SWR 8 - 1   | 7217.86                     | 59.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 11 SWR 11 - 1 | 7222.82                     | 47.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 12 SWR 12 - 1 | 7227.77                     | 47.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 13 SWR 13 - 1 | 7227.05                     | 47.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 14 SWR 14 - 1 | 7227.30                     | 39.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |
| MH 15 SWR 15 - 1 | 7227.30                     | 10.00                        | 0.00                           | 0.00                      | 0.00   | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |

| MH 9 SWR 9 - 1   | 7218.18 | 13.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|---------|-------|------|------|------|------|------|------|------|------|
| MH 10 SWR 10 - 1 | 7218.18 | 4.00  | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MH 16 SWR 16 - 1 | 7201.00 | 8.00  | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MH 3 SWR 3 - 1   | 7185.51 | 25.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MH 5 SWR 5 - 1   | 7185.81 | 23.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| MH 4 SWR 4 - 1   | 7185.81 | 3.00  | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

# **Manhole Output Summary:**

|                     |                           | Local                   | Contril              | bution               |                           |                | <b>Total De</b>      | sign Flow              |                       |                                    |
|---------------------|---------------------------|-------------------------|----------------------|----------------------|---------------------------|----------------|----------------------|------------------------|-----------------------|------------------------------------|
| Element<br>Name     | Overland<br>Time<br>(min) | Gutter<br>Time<br>(min) | Basin<br>Tc<br>(min) | Intensity<br>(in/hr) | Local<br>Contrib<br>(cfs) | Coeff.<br>Area | Intensity<br>(in/hr) | Manhole<br>Tc<br>(min) | Peak<br>Flow<br>(cfs) | Comment                            |
| 42 IN<br>OUTFALL    | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 926.95         | 0.09                 | 0.05                   | 85.00                 | Surface Water Present (Upstream)   |
| MH 1 SWR 1 -        | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 85.00                 | Surface Water Present (Downstream) |
| MH 2 SWR 2 -        | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 85.00                 |                                    |
| MH 6 SWR 6 -        | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 64.00                 |                                    |
| MH 7 SWR 7 -        | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 59.00                 |                                    |
| MH 8 SWR 8 -        | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 59.00                 |                                    |
| MH 11 SWR 11<br>- 1 | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 47.00                 |                                    |

| MH 12 SWR 12<br>- 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 47.00 |  |
|---------------------|------|------|------|------|------|------|------|------|-------|--|
| MH 13 SWR 13<br>- 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 47.00 |  |
| MH 14 SWR 14<br>- 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 39.00 |  |
| MH 15 SWR 15<br>- 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 10.00 |  |
| MH 9 SWR 9 -        | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 13.00 |  |
| MH 10 SWR 10<br>- 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 4.00  |  |
| MH 16 SWR 16<br>- 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 8.00  |  |
| MH 3 SWR 3 -        | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 25.00 |  |
| MH 5 SWR 5 -        | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 23.00 |  |
| MH 4 SWR 4 -        | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 3.00  |  |

# **Sewer Input Summary:**

|                  |                         | Ele                          | evation   |                            | Loss C        | oeffici      | ents            | Given Dimensions |                    |                    |  |
|------------------|-------------------------|------------------------------|-----------|----------------------------|---------------|--------------|-----------------|------------------|--------------------|--------------------|--|
| Element<br>Name  | Sewer<br>Length<br>(ft) | Downstream<br>Invert<br>(ft) | Slope (%) | Upstream<br>Invert<br>(ft) | Mannings<br>n | Bend<br>Loss | Lateral<br>Loss | Cross<br>Section | Rise<br>(ft or in) | Span<br>(ft or in) |  |
| MH 1 SWR 1 - 1   | 28.00                   | 7164.75                      | 2.0       | 7165.31                    | 0.013         | 0.03         | 1.00            | CIRCULAR         | 42.00 in           | 42.00 in           |  |
| MH 2 SWR 2 - 1   | 104.10                  | 7165.30                      | 12.2      | 7178.00                    | 0.013         | 0.08         | 1.00            | CIRCULAR         | 42.00 in           | 42.00 in           |  |
| MH 6 SWR 6 - 1   | 364.39                  | 7178.50                      | 4.1       | 7193.40                    | 0.013         | 0.08         | 1.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 7 SWR 7 - 1   | 515.53                  | 7193.90                      | 2.6       | 7207.41                    | 0.013         | 1.32         | 1.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 8 SWR 8 - 1   | 349.50                  | 7207.91                      | 1.0       | 7211.40                    | 0.013         | 0.05         | 1.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 11 SWR 11 - 1 | 200.72                  | 7211.88                      | 2.0       | 7215.89                    | 0.013         | 0.05         | 1.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 12 SWR 12 - 1 | 303.78                  | 7216.38                      | 1.0       | 7219.42                    | 0.013         | 0.05         | 1.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 13 SWR 13 - 1 | 82.55                   | 7219.92                      | 1.0       | 7220.75                    | 0.013         | 1.32         | 1.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 14 SWR 14 - 1 | 26.28                   | 7221.75                      | 1.5       | 7222.14                    | 0.013         | 1.06         | 0.00            | CIRCULAR         | 30.00 in           | 30.00 in           |  |
| MH 15 SWR 15 - 1 | 4.82                    | 7221.75                      | 7.1       | 7222.09                    | 0.013         | 0.83         | 0.00            | CIRCULAR         | 24.00 in           | 24.00 in           |  |
| MH 9 SWR 9 - 1   | 26.17                   | 7213.38                      | 1.5       | 7213.77                    | 0.013         | 1.32         | 0.00            | CIRCULAR         | 24.00 in           | 24.00 in           |  |
| MH 10 SWR 10 - 1 | 4.17                    | 7212.93                      | 13.3      | 7213.48                    | 0.013         | 1.32         | 0.00            | CIRCULAR         | 18.00 in           | 18.00 in           |  |
| MH 16 SWR 16 - 1 | 48.28                   | 7195.46                      | 1.9       | 7196.37                    | 0.013         | 0.08         | 0.00            | CIRCULAR         | 24.00 in           | 24.00 in           |  |
| MH 3 SWR 3 - 1   | 41.27                   | 7179.00                      | 2.0       | 7179.83                    | 0.013         | 0.83         | 0.00            | CIRCULAR         | 36.00 in           | 36.00 in           |  |
| MH 5 SWR 5 - 1   | 25.52                   | 7180.33                      | 1.0       | 7180.59                    | 0.013         | 0.83         | 0.00            | CIRCULAR         | 30.00 in           | 30.00 in           |  |
| MH 4 SWR 4 - 1   | 6.86                    | 7181.33                      | 3.9       | 7181.60                    | 0.013         | 0.63         | 0.00            | CIRCULAR         | 18.00 in           | 18.00 in           |  |

## **Sewer Flow Summary:**

|                     | Full Flow<br>Capacity |                | Critical Flow |                   | Normal Flow   |                   |                  |                       |            |                              |     |                 |
|---------------------|-----------------------|----------------|---------------|-------------------|---------------|-------------------|------------------|-----------------------|------------|------------------------------|-----|-----------------|
| Element<br>Name     | Flow (cfs)            | Velocity (fps) | Depth<br>(in) | Velocity<br>(fps) | Depth<br>(in) | Velocity<br>(fps) | Froude<br>Number | Flow<br>Condition     | Flow (cfs) | Surcharged<br>Length<br>(ft) | Con | ıment           |
| MH 1 SWR 1 -        | 142.67                | 14.83          | 34.46         | 10.06             | 23.35         | 15.47             | 2.17             | Supercritical<br>Jump | 85.00      | 3.88                         |     |                 |
| MH 2 SWR 2 -        | 352.36                | 36.62          | 34.46         | 10.06             | 14.05         | 30.14             | 5.75             | Supercritical         | 85.00      | 0.00                         |     | y is Too<br>igh |
| MH 6 SWR 6 -        | 135.24                | 19.13          | 30.83         | 9.93              | 17.43         | 18.87             | 3.13             | Supercritical         | 64.00      | 0.00                         |     | y is Too<br>igh |
| MH 7 SWR 7 -        | 108.26                | 15.32          | 29.80         | 9.43              | 18.95         | 15.65             | 2.46             | Supercritical<br>Jump | 59.00      | 61.78                        |     |                 |
| MH 8 SWR 8 -        | 66.88                 | 9.46           | 29.80         | 9.43              | 26.26         | 10.68             | 1.31             | Supercritical         | 59.00      | 0.00                         |     |                 |
| MH 11 SWR 11<br>- 1 | 94.58                 | 13.38          | 26.79         | 8.33              | 17.93         | 13.36             | 2.17             | Supercritical         | 47.00      | 0.00                         |     |                 |
| MH 12 SWR 12<br>- 1 | 66.88                 | 9.46           | 26.79         | 8.33              | 22.25         | 10.25             | 1.44             | Supercritical         | 47.00      | 0.00                         |     |                 |
| MH 13 SWR 13<br>- 1 | 66.88                 | 9.46           | 26.79         | 8.33              | 22.25         | 10.25             | 1.44             | Supercritical<br>Jump | 47.00      | 5.06                         |     |                 |
| MH 14 SWR 14<br>- 1 | 50.37                 | 10.26          | 25.28         | 8.84              | 19.82         | 11.33             | 1.66             | Supercritical         | 39.00      | 0.00                         |     |                 |
| MH 15 SWR 15<br>- 1 | 60.44                 | 19.24          | 13.58         | 5.46              | 6.60          | 14.23             | 4.00             | Supercritical         | 10.00      | 0.00                         |     |                 |

Road grade at 5% and cannot adjust storm slope enough to reduce velocity below 18 fps without excessive storm depth affecting utility services to adjacent lots Deviation Request submitted and Class IV Pipe proposed

| MH 9 SWR 9 -        | 27.78 | 8.84  | 15.56 | 6.03 | 11.54 | 8.70  | 1.77 | Supercritical         | 13.00 | 0.00  |  |
|---------------------|-------|-------|-------|------|-------|-------|------|-----------------------|-------|-------|--|
| MH 10 SWR 10<br>- 1 | 38.41 | 21.74 | 9.18  | 4.41 | 3.92  | 14.06 | 5.17 | Supercritical         | 4.00  | 0.00  |  |
| MH 16 SWR 16<br>- 1 | 31.14 | 9.91  | 12.08 | 5.05 | 8.30  | 8.30  | 2.06 | Supercritical         |       | 0.00  |  |
| MH 3 SWR 3 -        | 94.58 | 13.38 | 19.35 | 6.46 | 12.64 | 11.30 | 2.26 | Supercritical<br>Jump | 25.00 | 22.07 |  |
| MH 5 SWR 5 -        | 41.13 | 8.38  | 19.58 | 6.78 | 16.04 | 8.61  | 1.47 | Supercritical         | 23.00 | 0.00  |  |
| MH 4 SWR 4 -        | 20.90 | 11.82 | 7.90  | 4.02 | 4.61  | 8.40  | 2.83 | Supercritical         | 3.00  | 0.00  |  |

- A Froude number of 0 indicates that pressured flow occurs (adverse slope or undersized pipe).
- If the sewer is not pressurized, full flow represents the maximum gravity flow in the sewer.
- If the sewer is pressurized, full flow represents the pressurized flow conditions.

## **Sewer Sizing Summary:**

|                 |                       |                  | Exis     | Existing |          | Calculated |          | Used     |             |         |  |
|-----------------|-----------------------|------------------|----------|----------|----------|------------|----------|----------|-------------|---------|--|
| Element<br>Name | Peak<br>Flow<br>(cfs) | Cross<br>Section | Rise     | Span     | Rise     | Span       | Rise     | Span     | Area (ft^2) | Comment |  |
| MH 1 SWR 1 - 1  | 85.00                 | CIRCULAR         | 42.00 in | 42.00 in | 36.00 in | 36.00 in   | 42.00 in | 42.00 in | 9.62        |         |  |
| MH 2 SWR 2 - 1  | 85.00                 | CIRCULAR         | 42.00 in | 42.00 in | 27.00 in | 27.00 in   | 42.00 in | 42.00 in | 9.62        |         |  |
| MH 6 SWR 6 - 1  | 64.00                 | CIRCULAR         | 36.00 in | 36.00 in | 30.00 in | 30.00 in   | 36.00 in | 36.00 in | 7.07        |         |  |

| MH 7 SWR 7 - 1   | 59.00 | CIRCULAR | 36.00 in | 36.00 in | 30.00 in | 30.00 in | 36.00 in | 36.00 in | 7.07 |
|------------------|-------|----------|----------|----------|----------|----------|----------|----------|------|
| MH 8 SWR 8 - 1   | 59.00 | CIRCULAR | 36.00 in | 7.07 |
| MH 11 SWR 11 - 1 | 47.00 | CIRCULAR | 36.00 in | 36.00 in | 30.00 in | 30.00 in | 36.00 in | 36.00 in | 7.07 |
| MH 12 SWR 12 - 1 | 47.00 | CIRCULAR | 36.00 in | 36.00 in | 33.00 in | 33.00 in | 36.00 in | 36.00 in | 7.07 |
| MH 13 SWR 13 - 1 | 47.00 | CIRCULAR | 36.00 in | 36.00 in | 33.00 in | 33.00 in | 36.00 in | 36.00 in | 7.07 |
| MH 14 SWR 14 - 1 | 39.00 | CIRCULAR | 30.00 in | 4.91 |
| MH 15 SWR 15 - 1 | 10.00 | CIRCULAR | 24.00 in | 24.00 in | 18.00 in | 18.00 in | 24.00 in | 24.00 in | 3.14 |
| MH 9 SWR 9 - 1   | 13.00 | CIRCULAR | 24.00 in | 24.00 in | 21.00 in | 21.00 in | 24.00 in | 24.00 in | 3.14 |
| MH 10 SWR 10 - 1 | 4.00  | CIRCULAR | 18.00 in | 1.77 |
| MH 16 SWR 16 - 1 | 8.00  | CIRCULAR | 24.00 in | 24.00 in | 18.00 in | 18.00 in | 24.00 in | 24.00 in | 3.14 |
| MH 3 SWR 3 - 1   | 25.00 | CIRCULAR | 36.00 in | 36.00 in | 24.00 in | 24.00 in | 36.00 in | 36.00 in | 7.07 |
| MH 5 SWR 5 - 1   | 23.00 | CIRCULAR | 30.00 in | 30.00 in | 27.00 in | 27.00 in | 30.00 in | 30.00 in | 4.91 |
| MH 4 SWR 4 - 1   | 3.00  | CIRCULAR | 18.00 in | 1.77 |

- Calculated diameter was determined by sewer hydraulic capacity rounded up to the nearest commercially available size.
- Sewer sizes should not decrease downstream.
- All hydraulics where calculated using the 'Used' parameters.

# **Grade Line Summary:**

**Tailwater Elevation (ft):** 7168.30

|                  | Invert 1        | Invert Elev.  |                      | eam Manhole<br>osses    | HG              | Ĺ                | EGL             |                          |               |  |
|------------------|-----------------|---------------|----------------------|-------------------------|-----------------|------------------|-----------------|--------------------------|---------------|--|
| Element<br>Name  | Downstream (ft) | Upstream (ft) | Bend<br>Loss<br>(ft) | Lateral<br>Loss<br>(ft) | Downstream (ft) | Upstream<br>(ft) | Downstream (ft) | Friction<br>Loss<br>(ft) | Upstream (ft) |  |
| MH 1 SWR 1 - 1   | 7164.75         | 7165.31       | 0.00                 | 0.00                    | 7168.30         | 7168.30          | 7169.51         | 0.25                     | 7169.76       |  |
| MH 2 SWR 2 - 1   | 7165.30         | 7178.00       | 0.10                 | 0.00                    | 7168.40         | 7180.87          | 7180.58         | 1.87                     | 7182.44       |  |
| MH 6 SWR 6 - 1   | 7178.50         | 7193.40       | 0.10                 | 0.00                    | 7180.97         | 7195.97          | 7185.48         | 12.02                    | 7197.50       |  |
| MH 7 SWR 7 - 1   | 7193.90         | 7207.41       | 1.43                 | 0.19                    | 7198.04         | 7209.89          | 7199.12         | 12.15                    | 7211.27       |  |
| MH 8 SWR 8 - 1   | 7207.91         | 7211.40       | 0.05                 | 0.00                    | 7210.09         | 7213.88          | 7211.86         | 3.40                     | 7215.26       |  |
| MH 11 SWR 11 - 1 | 7211.88         | 7215.89       | 0.03                 | 0.40                    | 7214.31         | 7218.12          | 7216.14         | 3.06                     | 7219.20       |  |
| MH 12 SWR 12 - 1 | 7216.38         | 7219.42       | 0.03                 | 0.00                    | 7218.24         | 7221.65          | 7219.87         | 2.86                     | 7222.73       |  |
| MH 13 SWR 13 - 1 | 7219.92         | 7220.75       | 0.91                 | 0.00                    | 7222.95         | 7222.98          | 7223.64         | 0.42                     | 7224.06       |  |
| MH 14 SWR 14 - 1 | 7221.75         | 7222.14       | 1.04                 | 0.00                    | 7224.02         | 7224.25          | 7225.40         | 0.07                     | 7225.46       |  |
| MH 15 SWR 15 - 1 | 7221.75         | 7222.09       | 0.13                 | 0.00                    | 7223.11         | 7225.29          | 7225.44         | 0.00                     | 7225.44       |  |
| MH 9 SWR 9 - 1   | 7213.38         | 7213.77       | 0.35                 | 0.00                    | 7214.30         | 7215.07          | 7215.62         | 0.02                     | 7215.63       |  |
| MH 10 SWR 10 - 1 | 7212.93         | 7213.48       | 0.11                 | 0.00                    | 7213.99         | 7216.24          | 7216.32         | 0.00                     | 7216.32       |  |
| MH 16 SWR 16 - 1 | 7195.46         | 7196.37       | 0.01                 | 0.00                    | 7196.08         | 7197.38          | 7197.51         | 0.26                     | 7197.77       |  |
| MH 3 SWR 3 - 1   | 7179.00         | 7179.83       | 0.16                 | 0.00                    | 7182.41         | 7182.41          | 7182.60         | 0.04                     | 7182.64       |  |
| MH 5 SWR 5 - 1   | 7180.33         | 7180.59       | 0.28                 | 0.00                    | 7182.69         | 7182.69          | 7183.05         | 0.07                     | 7183.11       |  |
| MH 4 SWR 4 - 1   | 7181.33         | 7181.60       | 0.03                 | 0.00                    | 7182.44         | 7182.74          | 7182.81         | 0.00                     | 7182.81       |  |

- Bend and Lateral losses only apply when there is an outgoing sewer. The system outfall, sewer #0, is not considered a sewer.
- Bend loss = Bend K \* V\_fi ^ 2/(2\*g)
  Lateral loss = V\_fo ^ 2/(2\*g)- Junction Loss K \* V\_fi ^ 2/(2\*g).
  Friction loss is always Upstream EGL Downstream EGL.

## 42" Storm System Outfall to Pond 3 – 100 yr. HGL

## **System Input Summary**

### **Rainfall Parameters**

Rainfall Return Period: 100

Rainfall Calculation Method: Table

| Time | Intensity |
|------|-----------|
| 5    | 8.68      |
| 10   | 6.93      |
| 20   | 5.19      |
| 30   | 4.16      |
| 40   | 3.44      |
| 60   | 2.42      |
| 120  | 0.67      |

#### **Rational Method Constraints**

Minimum Urban Runoff Coeff.: 0.20

Maximum Rural Overland Len. (ft): 500

Maximum Urban Overland Len. (ft): 300

**Used UDFCD Tc. Maximum:** Yes

### **Sizer Constraints**

Minimum Sewer Size (in): 18.00 Maximum Depth to Rise Ratio: 0.90 Maximum Flow Velocity (fps): 18.0 Minimum Flow Velocity (fps): 2.0

### **Backwater Calculations:**

**Tailwater Elevation (ft):** 7206.60

## **Manhole Input Summary:**

|                            |                             | Given Flow                      |                                | Sub Basin Information     |       |                    |                            |                          |      |                             |  |  |
|----------------------------|-----------------------------|---------------------------------|--------------------------------|---------------------------|-------|--------------------|----------------------------|--------------------------|------|-----------------------------|--|--|
| Element<br>Name            | Ground<br>Elevation<br>(ft) | Total<br>Known<br>Flow<br>(cfs) | Local<br>Contribution<br>(cfs) | Drainage<br>Area<br>(Ac.) | Kunon | 5yr<br>Coefficient | Overland<br>Length<br>(ft) | Overland<br>Slope<br>(%) |      | Gutter<br>Velocity<br>(fps) |  |  |
| 42 IN OUTFALL<br>TO POND 3 | 7166.50                     | 0.00                            | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |
| MH 1 SWR 1 - 1             | 7210.13                     | 79.00                           | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |
| MH 2 SWR 2 - 1             | 7216.19                     | 79.00                           | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |
| MH 3 SWR 3 - 1             | 7223.16                     | 79.00                           | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |
| MH 6 SWR 6 - 1             | 7223.16                     | 8.00                            | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |
| MH 4 SWR 4 - 1             | 7226.04                     | 74.00                           | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |
| MH 5 SWR 5 - 1             | 7224.50                     | 74.00                           | 0.00                           | 0.00                      | 0.00  | 0.00               | 0.00                       | 0.00                     | 0.00 | 0.00                        |  |  |

# **Manhole Output Summary:**

|                            |                           | Local                   | Contrib              | oution               |                           |                | Total Des            | sign Flow              |                       |                                    |
|----------------------------|---------------------------|-------------------------|----------------------|----------------------|---------------------------|----------------|----------------------|------------------------|-----------------------|------------------------------------|
| Element<br>Name            | Overland<br>Time<br>(min) | Gutter<br>Time<br>(min) | Basin<br>Tc<br>(min) | Intensity<br>(in/hr) | Local<br>Contrib<br>(cfs) | Coeff.<br>Area | Intensity<br>(in/hr) | Manhole<br>Tc<br>(min) | Peak<br>Flow<br>(cfs) | Comment                            |
| 42 IN OUTFALL<br>TO POND 3 | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 813.49         | 0.10                 | 0.06                   | 79.00                 | Surface Water Present (Upstream)   |
| MH 1 SWR 1 - 1             | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 79.00                 | Surface Water Present (Downstream) |
| MH 2 SWR 2 - 1             | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 79.00                 | Surface Water Present (Upstream)   |
| MH 3 SWR 3 - 1             | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 79.00                 | Surface Water Present (Downstream) |
| MH 6 SWR 6 - 1             | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 8.00                  |                                    |
| MH 4 SWR 4 - 1             | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 74.00                 |                                    |
| MH 5 SWR 5 - 1             | 0.00                      | 0.00                    | 0.00                 | 0.00                 | 0.00                      | 0.00           | 0.00                 | 0.00                   | 74.00                 |                                    |

# **Sewer Input Summary:**

| Elevation       |                         |                              | <b>Loss Coefficients</b> |                            |               | Given Dimensions |                 |                  |                    |                    |
|-----------------|-------------------------|------------------------------|--------------------------|----------------------------|---------------|------------------|-----------------|------------------|--------------------|--------------------|
| Element<br>Name | Sewer<br>Length<br>(ft) | Downstream<br>Invert<br>(ft) | Slope<br>(%)             | Upstream<br>Invert<br>(ft) | Mannings<br>n | Bend<br>Loss     | Lateral<br>Loss | Cross<br>Section | Rise<br>(ft or in) | Span<br>(ft or in) |
| MH 1 SWR 1 - 1  | 27.56                   | 7203.00                      | 1.0                      | 7203.28                    | 0.013         | 0.03             | 1.00            | CIRCULAR         | 42.00 in           | 42.00 in           |
| MH 2 SWR 2 - 1  | 444.75                  | 7203.78                      | 2.4                      | 7214.52                    | 0.013         | 0.73             | 1.00            | CIRCULAR         | 42.00 in           | 42.00 in           |

| MH 3 SWR 3 - 1 | 165.46 | 7215.02 | 1.0  | 7216.67 | 0.013 | 1.32 | 1.00 | CIRCULAR | 42.00 in | 42.00 in |
|----------------|--------|---------|------|---------|-------|------|------|----------|----------|----------|
| MH 6 SWR 6 - 1 | 8.87   | 7218.67 | 12.2 | 7219.75 | 0.013 | 1.32 | 0.00 | CIRCULAR | 24.00 in | 24.00 in |
| MH 4 SWR 4 - 1 | 117.35 | 7217.17 | 1.0  | 7218.35 | 0.013 | 0.63 | 1.00 | CIRCULAR | 42.00 in | 42.00 in |
| MH 5 SWR 5 - 1 | 39.91  | 7218.85 | 2.9  | 7220.00 | 0.013 | 0.05 | 1.00 | CIRCULAR | 42.00 in | 42.00 in |

## **Sewer Flow Summary:**

|                 | Full Flow Capacity   Critical Flow   Normal Flow |                   |               | Normal Flow       |               |                   |                  |                    |            |                              |         |
|-----------------|--------------------------------------------------|-------------------|---------------|-------------------|---------------|-------------------|------------------|--------------------|------------|------------------------------|---------|
| Element<br>Name | Flow (cfs)                                       | Velocity<br>(fps) | Depth<br>(in) | Velocity<br>(fps) | Depth<br>(in) | Velocity<br>(fps) | Froude<br>Number | Flow<br>Condition  | Flow (cfs) | Surcharged<br>Length<br>(ft) | Comment |
| MH 1 SWR 1 - 1  | 100.88                                           | 10.49             | 33.33         | 9.65              | 27.98         | 11.60             | 1.42             | Supercritical Jump | 79.00      | 24.72                        |         |
| MH 2 SWR 2 - 1  | 156.77                                           | 16.29             | 33.33         | 9.65              | 21.10         | 16.33             | 2.45             | Supercritical Jump | 79.00      | 13.10                        |         |
| MH 3 SWR 3 - 1  | 100.88                                           | 10.49             | 33.33         | 9.65              | 27.98         | 11.60             | 1.42             | Supercritical Jump | 79.00      | 145.49                       |         |
| MH 6 SWR 6 - 1  | 79.15                                            | 25.20             | 12.08         | 5.05              | 5.15          | 16.16             | 5.19             | Supercritical      | 8.00       | 0.00                         |         |
| MH 4 SWR 4 - 1  | 101.17                                           | 10.52             | 32.32         | 9.31              | 26.67         | 11.48             | 1.46             | Supercritical Jump | 74.00      | 29.05                        |         |
| MH 5 SWR 5 - 1  | 171.24                                           | 17.80             | 32.32         | 9.31              | 19.30         | 17.15             | 2.72             | Supercritical      | 74.00      | 0.00                         |         |

- A Froude number of 0 indicates that pressured flow occurs (adverse slope or undersized pipe).
- If the sewer is not pressurized, full flow represents the maximum gravity flow in the sewer.
- If the sewer is pressurized, full flow represents the pressurized flow conditions.

## **Sewer Sizing Summary:**

|                 |                       |                  | Existing |          | Calcı    | Calculated |          | Used     |             |         |
|-----------------|-----------------------|------------------|----------|----------|----------|------------|----------|----------|-------------|---------|
| Element<br>Name | Peak<br>Flow<br>(cfs) | Cross<br>Section | Rise     | Span     | Rise     | Span       | Rise     | Span     | Area (ft^2) | Comment |
| MH 1 SWR 1 - 1  | 79.00                 | CIRCULAR         | 42.00 in | 42.00 in | 42.00 in | 42.00 in   | 42.00 in | 42.00 in | 9.62        |         |
| MH 2 SWR 2 - 1  | 79.00                 | CIRCULAR         | 42.00 in | 42.00 in | 33.00 in | 33.00 in   | 42.00 in | 42.00 in | 9.62        |         |
| MH 3 SWR 3 - 1  | 79.00                 | CIRCULAR         | 42.00 in | 42.00 in | 42.00 in | 42.00 in   | 42.00 in | 42.00 in | 9.62        |         |
| MH 6 SWR 6 - 1  | 8.00                  | CIRCULAR         | 24.00 in | 24.00 in | 18.00 in | 18.00 in   | 24.00 in | 24.00 in | 3.14        |         |
| MH 4 SWR 4 - 1  | 74.00                 | CIRCULAR         | 42.00 in | 42.00 in | 42.00 in | 42.00 in   | 42.00 in | 42.00 in | 9.62        |         |
| MH 5 SWR 5 - 1  | 74.00                 | CIRCULAR         | 42.00 in | 42.00 in | 33.00 in | 33.00 in   | 42.00 in | 42.00 in | 9.62        |         |

- Calculated diameter was determined by sewer hydraulic capacity rounded up to the nearest commercially available size.
- Sewer sizes should not decrease downstream.
- All hydraulics where calculated using the 'Used' parameters.

## **Grade Line Summary:**

**Tailwater Elevation (ft):** 7206.60

|                 | Invert Elev.    |               | Downstream Manhole<br>Losses |                         | HGL             |               | EGL             |                          |               |
|-----------------|-----------------|---------------|------------------------------|-------------------------|-----------------|---------------|-----------------|--------------------------|---------------|
| Element<br>Name | Downstream (ft) | Upstream (ft) | Bend<br>Loss<br>(ft)         | Lateral<br>Loss<br>(ft) | Downstream (ft) | Upstream (ft) | Downstream (ft) | Friction<br>Loss<br>(ft) | Upstream (ft) |
| MH 1 SWR 1 - 1  | 7203.00         | 7203.28       | 0.00                         | 0.00                    | 7206.60         | 7206.75       | 7207.65         | 0.15                     | 7207.80       |
| MH 2 SWR 2 - 1  | 7203.78         | 7214.52       | 0.76                         | 0.00                    | 7207.52         | 7217.30       | 7208.56         | 10.18                    | 7218.74       |
| MH 3 SWR 3 - 1  | 7215.02         | 7216.67       | 1.38                         | 0.00                    | 7219.08         | 7219.88       | 7220.12         | 0.89                     | 7221.02       |
| MH 6 SWR 6 - 1  | 7218.67         | 7219.75       | 0.13                         | 0.00                    | 7220.02         | 7223.05       | 7223.15         | 0.00                     | 7223.15       |
| MH 4 SWR 4 - 1  | 7217.17         | 7218.35       | 0.58                         | 0.13                    | 7220.81         | 7221.04       | 7221.72         | 0.67                     | 7222.39       |
| MH 5 SWR 5 - 1  | 7218.85         | 7220.00       | 0.05                         | 0.00                    | 7221.09         | 7224.11       | 7225.03         | 0.00                     | 7225.03       |

- Bend and Lateral losses only apply when there is an outgoing sewer. The system outfall, sewer #0, is not considered a sewer.
- Bend loss = Bend K \* V\_fi ^ 2/(2\*g)
   Lateral loss = V\_fo ^ 2/(2\*g)- Junction Loss K \* V\_fi ^ 2/(2\*g).
- Friction loss is always Upstream EGL Downstream EGL.

## **Description**

A sediment basin is a temporary pond built on a construction site to capture eroded or disturbed soil transported in storm runoff prior to discharge from the site. Sediment basins are designed to capture site runoff and slowly release it to allow time for settling of sediment prior to discharge. Sediment basins are often constructed in locations that will later be modified to serve as post-construction stormwater basins.

## **Appropriate Uses**

Most large construction sites (typically greater than 2 acres) will require one or more sediment basins for effective



**Photograph SB-1.** Sediment basin at the toe of a slope. Photo courtesy of WWE.

management of construction site runoff. On linear construction projects, sediment basins may be impractical; instead, sediment traps or other combinations of BMPs may be more appropriate.

Sediment basins should not be used as stand-alone sediment controls. Erosion and other sediment controls should also be implemented upstream.

When feasible, the sediment basin should be installed in the same location where a permanent post-construction detention pond will be located.

## **Design and Installation**

The design procedure for a sediment basin includes these steps:

- Basin Storage Volume: Provide a storage volume of at least 3,600 cubic feet per acre of drainage area. To the extent practical, undisturbed and/or off-site areas should be diverted around sediment basins to prevent "clean" runoff from mixing with runoff from disturbed areas. For undisturbed areas (both on-site and off-site) that cannot be diverted around the sediment basin, provide a minimum of 500 ft³/acre of storage for undeveloped (but stable) off-site areas in addition to the 3,600 ft³/acre for disturbed areas. For stable, developed areas that cannot be diverted around the sediment basin, storage volume requirements are summarized in Table SB-1.
- **Basin Geometry:** Design basin with a minimum length-to-width ratio of 2:1 (L:W). If this cannot be achieved because of site space constraints, baffling may be required to extend the effective distance between the inflow point(s) and the outlet to minimize short-circuiting.

  Sediment Basins
- **Dam Embankment**: It is recommended that embankment slopes be 4:1 (H:V) or flatter and no steeper than 3:1 (H:V) in any location.


| Sediment Basins          |     |  |  |  |  |
|--------------------------|-----|--|--|--|--|
| Functions                |     |  |  |  |  |
| Erosion Control          | No  |  |  |  |  |
| Sediment Control         | Yes |  |  |  |  |
| Site/Material Management | No  |  |  |  |  |

• **Inflow Structure**: For concentrated flow entering the basin, provide energy dissipation at the point of inflow.

Table SB-1. Additional Volume Requirements for Undisturbed and Developed Tributary Areas
Draining through Sediment Basins

| Imperviousness (%) | Additional Storage Volume (ft <sup>3</sup> ) Per Acre of Tributary Area |
|--------------------|-------------------------------------------------------------------------|
| Undeveloped        | 500                                                                     |
| 10                 | 800                                                                     |
| 20                 | 1230                                                                    |
| 30                 | 1600                                                                    |
| 40                 | 2030                                                                    |
| 50                 | 2470                                                                    |
| 60                 | 2980                                                                    |
| 70                 | 3560                                                                    |
| 80                 | 4360                                                                    |
| 90                 | 5300                                                                    |
| 100                | 6460                                                                    |

- Outlet Works: The outlet pipe shall extend through the embankment at a minimum slope of 0.5 percent. Outlet works can be designed using one of the following approaches:
  - o **Riser Pipe (Simplified Detail):** Detail SB-1 provides a simplified design for basins treating no more than 15 acres.
  - Orifice Plate or Riser Pipe: Follow the design criteria for Full Spectrum Detention outlets in the EDB Fact Sheet provided in Chapter 4 of this manual for sizing of outlet perforations with an emptying time of approximately 72 hours. In lieu of the trash rack, pack uniformly sized 1½ to 2-inch gravel in front of the plate or surrounding the riser pipe. This gravel will need to be cleaned out frequently during the construction period as sediment accumulates within it. The gravel pack will need to be removed and disposed of following construction to reclaim the basin for use as a permanent detention facility. If the basin will be used as a permanent extended detention basin for the site, a trash rack will need to be installed once contributing drainage areas have been stabilized and the gravel pack and accumulated sediment have been removed.
  - o **Floating Skimmer**: If a floating skimmer is used, install it using manufacturer's recommendations. Illustration SB-1 provides an illustration of a Faircloth Skimmer Floating Outlet<sup>TM</sup>, one of the more commonly used floating skimmer outlets. A skimmer should be designed to release the design volume in no less than 48 hours. The use of a floating skimmer outlet can increase the sediment capture efficiency of a basin significantly. A floating outlet continually decants cleanest water off the surface of the pond and releases cleaner water than would discharge from a perforated riser pipe or plate.

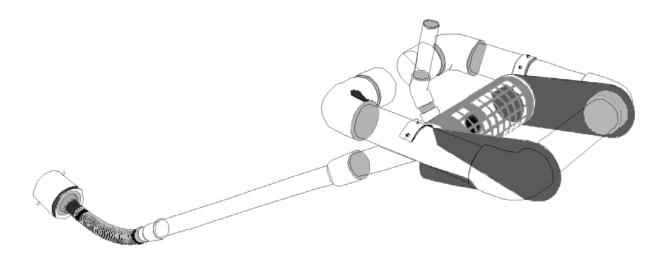

**Illustration SB-1.** Outlet structure for a temporary sediment basin - Faircloth Skimmer Floating Outlet. Illustration courtesy of J. W. Faircloth & Sons, Inc., FairclothSkimmer.com.


- Outlet Protection and Spillway: Consider all flow paths for runoff leaving the basin, including protection at the typical point of discharge as well as overtopping.
  - Outlet Protection: Outlet protection should be provided where the velocity of flow will exceed the maximum permissible velocity of the material of the waterway into which discharge occurs. This may require the use of a riprap apron at the outlet location and/or other measures to keep the waterway from eroding.
  - Emergency Spillway: Provide a stabilized emergency overflow spillway for rainstorms that exceed the capacity of the sediment basin volume and its outlet. Protect basin embankments from erosion and overtopping. If the sediment basin will be converted to a permanent detention basin, design and construct the emergency spillway(s) as required for the permanent facility. If the sediment basin will not become a permanent detention basin, it may be possible to substitute a heavy polyvinyl membrane or properly bedded rock cover to line the spillway and downstream embankment, depending on the height, slope, and width of the embankments.

### **Maintenance and Removal**

Maintenance activities include the following:

- Dredge sediment from the basin, as needed to maintain BMP effectiveness, typically when the design storage volume is no more than one-third filled with sediment.
- Inspect the sediment basin embankments for stability and seepage.
- Inspect the inlet and outlet of the basin, repair damage, and remove debris. Remove, clean and replace the gravel around the outlet on a regular basis to remove the accumulated sediment within it and keep the outlet functioning.
- Be aware that removal of a sediment basin may require dewatering and associated permit requirements.
- Do not remove a sediment basin until the upstream area has been stabilized with vegetation.

Final disposition of the sediment basin depends on whether the basin will be converted to a permanent post-construction stormwater basin or whether the basin area will be returned to grade. For basins being converted to permanent detention basins, remove accumulated sediment and reconfigure the basin and outlet to meet the requirements of the final design for the detention facility. If the sediment basin is not to be used as a permanent detention facility, fill the excavated area with soil and stabilize with vegetation.

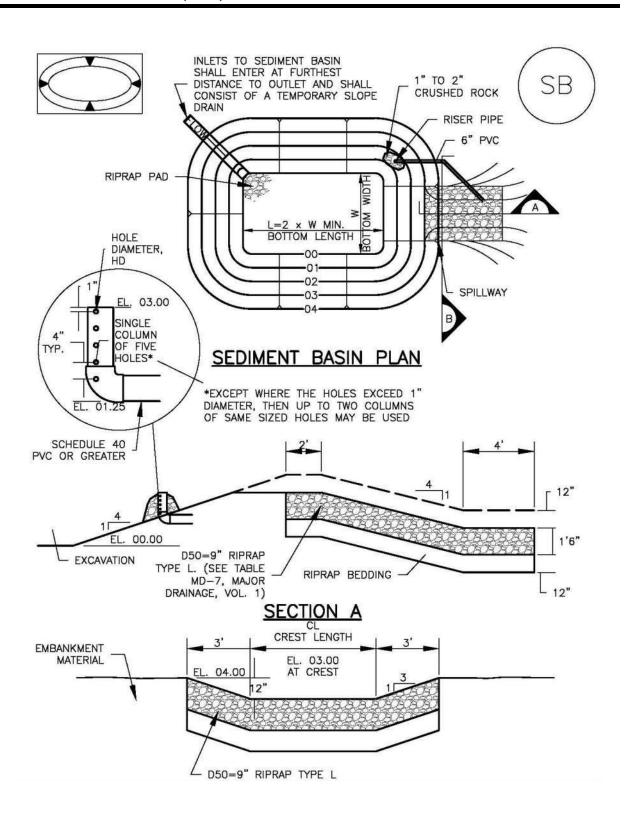

| TABLE SB-1. SIZ                                                         | ZING INFORMATION FO                                          | OR STANDARD SEDIMENT                                                             | BASIN                                                                                             |
|-------------------------------------------------------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Upstream Drainage<br>Area (rounded to<br>nearest acre), (ac)            | Basin Bottom Width<br>(W), (ft)                              | Spillway Crest<br>Length (CL), (ft)                                              | Hole<br>Diameter<br>(HD), (in)                                                                    |
| 1<br>2<br>3<br>4<br>5<br>6<br>7<br>8<br>9<br>10<br>11<br>12<br>13<br>14 | 12 ½ 21 28 33 ½ 38 ½ 43 47 ¼ 51 55 58 ¼ 61 64 67 ½ 70 ½ 73 ¼ | 2<br>3<br>5<br>6<br>8<br>9<br>11<br>12<br>13<br>15<br>16<br>18<br>19<br>21<br>22 | 932<br>13/6<br>14<br>9/6<br>21/32<br>25/32<br>25/32<br>78<br>15/6<br>31/32<br>1<br>1 1/6<br>1 1/8 |

#### SEDIMENT BASIN INSTALLATION NOTES

- 1. SEE PLAN VIEW FOR:
  - -LOCATION OF SEDIMENT BASIN.
  - -TYPE OF BASIN (STANDARD BASIN OR NONSTANDARD BASIN).
  - -FOR STANDARD BASIN, BOTTOM WIDTH W, CREST LENGTH CĹ, AND HOLE DIAMETER. HD.
  - -FOR NONSTANDARD BASIN, SEE CONSTRUCTION DRAWINGS FOR DESIGN OF BASIN INCLUDING RISER HEIGHT H, NUMBER OF COLUMNS N, HOLE DIAMETER HD AND PIPE DIAMETER D.
- 2. FOR STANDARD BASIN, BOTTOM DIMENSION MAY BE MODIFIED AS LONG AS BOTTOM AREA IS NOT REDUCED.
- 3. SEDIMENT BASINS SHALL BE INSTALLED PRIOR TO ANY OTHER LAND-DISTURBING ACTIVITY THAT RELIES ON ON BASINS AS A STORMWATER CONTROL.
- 4. EMBANKMENT MATERIAL SHALL CONSIST OF SOIL FREE OF DEBRIS, ORGANIC MATERIAL, AND ROCKS OR CONCRETE GREATER THAN 3 INCHES AND SHALL HAVE A MINIMUM OF 15 PERCENT BY WEIGHT PASSING THE NO. 200 SIEVE.
- 5. EMBANKMENT MATERIAL SHALL BE COMPACTED TO AT LEAST 95 PERCENT OF MAXIMUM DENSITY IN ACCORDANCE WITH ASTM D698.
- 6. PIPE SCH 40 OR GREATER SHALL BE USED.
- 7. THE DETAILS SHOWN ON THESE SHEETS PERTAIN TO STANDARD SEDIMENT BASIN(S) FOR DRAINAGE AREAS LESS THAN 15 ACRES. SEE CONSTRUCTION DRAWINGS FOR EMBANKMENT, STORAGE VOLUME, SPILLWAY, OUTLET, AND OUTLET PROTECTION DETAILS FOR ANY SEDIMENT BASIN(S) THAT HAVE BEEN INDIVIDUALLY DESIGNED FOR DRAINAGE AREAS LARGER THAN 15 ACRES.

#### SEDIMENT BASIN MAINTENANCE NOTES

- 1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.
- 2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.
- 3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.
- 4. SEDIMENT ACCUMULATED IN BASIN SHALL BE REMOVED AS NEEDED TO MAINTAIN BMP EFFECTIVENESS, TYPICALLY WHEN SEDIMENT DEPTH REACHES ONE FOOT (I.E., TWO FEET BELOW THE SPILLWAY CREST).
- 5. SEDIMENT BASINS ARE TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND GRASS COVER IS ACCEPTED BY THE LOCAL JURISDICTION.
- 6. WHEN SEDIMENT BASINS ARE REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.

(DETAILS ADAPTED FROM DOUGLAS COUNTY, COLORADO)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

## **Description**

Sediment traps are formed by excavating an area or by placing an earthen embankment across a low area or drainage swale. Sediment traps are designed to capture drainage from disturbed areas less than one acre and allow settling of sediment.

## **Appropriate Uses**

Sediment traps can be used in combination with other layers of erosion and sediment controls to trap sediment from small drainage areas (less than one



**Photograph ST-1.** Sediment traps are used to collect sediment-laden runoff from disturbed area. Photo courtesy of EPA Menu of BMPs.

acre) or areas with localized high sediment loading. For example, sediment traps are often provided in conjunction with vehicle tracking controls and wheel wash facilities.

## **Design and Installation**

A sediment trap consists of a small excavated basin with an earthen berm and a riprap outlet. The berm of the sediment trap may be constructed from the excavated material and must be compacted to 95 percent of the maximum density in accordance with ASTM D698. An overflow outlet must be provided at an elevation at least 6 inches below the top of the berm. See Detail ST-1 for additional design and installation information.

#### **Maintenance and Removal**


Inspect the sediment trap embankments for stability and seepage.


Remove accumulated sediment as needed to maintain the effectiveness of the sediment trap, typically when the sediment depth is approximately one-half the height of the outflow embankment.


Inspect the outlet for debris and damage. Repair damage to the outlet, and remove all obstructions.

A sediment trap should not be removed until the upstream area is sufficiently stabilized. Upon removal of the trap, the disturbed area should be covered with topsoil and stabilized.

| Sediment Trap            |     |  |  |  |  |
|--------------------------|-----|--|--|--|--|
| Functions                |     |  |  |  |  |
| Erosion Control          | No  |  |  |  |  |
| Sediment Control         | Yes |  |  |  |  |
| Site/Material Management | No  |  |  |  |  |

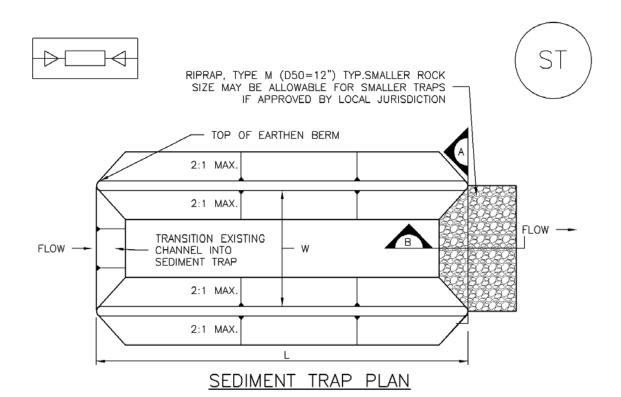

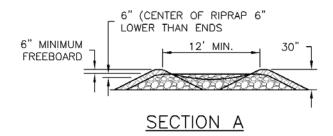

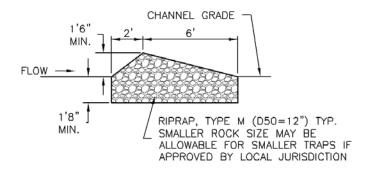

SECTION B ST-1. SEDIMENT TRAP

#### SEDIMENT TRAP INSTALLATION NOTES

- SEE PLAN VIEW FOR:


   LOCATION, LENGTH AND WIDTH OF SEDIMENT TRAP.
- 2. ONLY USE FOR DRAINAGE AREAS LESS THAN 1 ACRE.
- 3. SEDIMENT TRAPS SHALL BE INSTALLED PRIOR TO ANY UPGRADIENT LAND-DISTURBING ACTIVITIES.
- 4. SEDIMENT TRAP BERM SHALL BE CONSTRUCTED FROM MATERIAL FROM EXCAVATION. THE BERM SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY IN ACCORDANCE WITH ASTM D698.
- 5. SEDIMENT TRAP OUTLET TO BE CONSTRUCTED OF RIPRAP, TYPE M (D50=12") TYP.SMALLER ROCK SIZE MAY BE ALLOWABLE FOR SMALLER TRAPS IF APPROVED BY LOCAL JURISDICTION.
- 6. THE TOP OF THE EARTHEN BERM SHALL BE A MINIMUM OF 6" HIGHER THAN THE TOP OF THE RIPRAP OUTLET STRUCTURE.
- 7. THE ENDS OF THE RIPRAP OUTLET STRUCTURE SHALL BE A MINIMUM OF 6" HIGHER THAN THE CENTER OF THE OUTLET STRUCTURE.

#### SEDIMENT TRAP MAINTENANCE NOTES

- 1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.
- 2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.
- 3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.
- 4. REMOVE SEDIMENT ACCUMULATED IN TRAP AS NEEDED TO MAINTAIN THE FUNCTIONALITY OF THE BMP, TYPICALLY WHEN THE SEDIMENT DEPTH REACHES ½ THE HEIGHT OF THE RIPRAP OUTLET.
- 5. SEDIMENT TRAPS SHALL REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND APPROVED BY THE LOCAL JURISDICTION.
- 6. WHEN SEDIMENT TRAPS ARE REMOVED, THE DISTURBED AREA SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED IN A MANNER APPROVED BY THE LOCAL JURISDICTION.

(DETAILS ADAPTED FROM DOUGLAS COUNTY, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

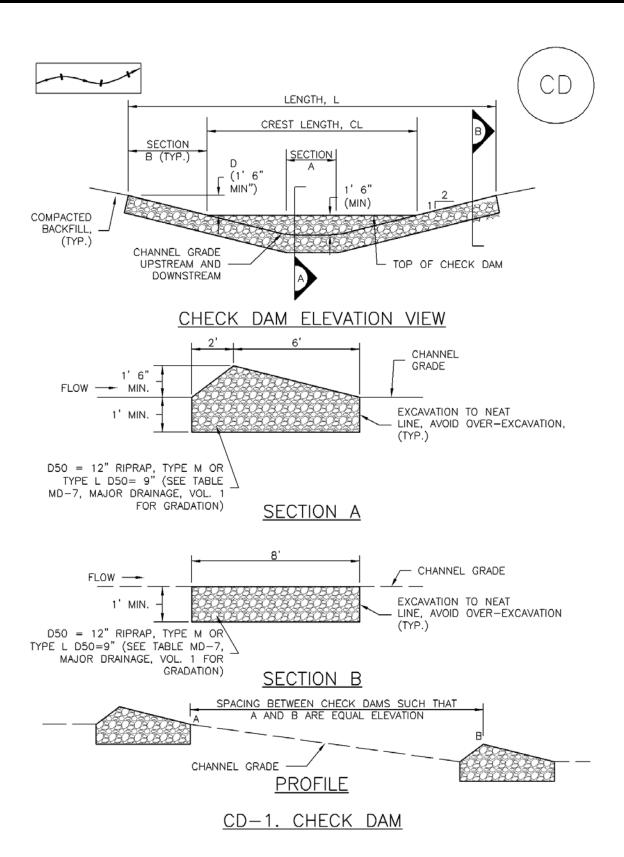

#### CHECK DAM INSTALLATION NOTES

- 1. SEE PLAN VIEW FOR:
  - -LOCATION OF CHECK DAMS.
  - -CHECK DAM TYPE (CHECK DAM OR REINFORCED CHECK DAM).
  - -LENGTH (L), CREST LENGTH (CL), AND DEPTH (D).
- 2. CHECK DAMS INDICATED ON INITIAL SWMP SHALL BE INSTALLED AFTER CONSTRUCTION FENCE, BUT PRIOR TO ANY UPSTREAM LAND DISTURBING ACTIVITIES.
- 3. RIPRAP UTILIZED FOR CHECK DAMS SHOULD BE OF APPROPRIATE SIZE FOR THE APPLICATION. TYPICAL TYPES OF RIPRAP USED FOR CHECK DAMS ARE TYPE M (D50 12") OR TYPE L (D50 9").
- 4. RIPRAP PAD SHALL BE TRENCHED INTO THE GROUND A MINIMUM OF 1'.
- 5. THE ENDS OF THE CHECK DAM SHALL BE A MINIMUM OF 1' 6" HIGHER THAN THE CENTER OF THE CHECK DAM.

#### CHECK DAM MAINTENANCE NOTES

- 1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.
- 2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.
- 3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.
- 4. SEDIMENT ACCUMULATED UPSTREAM OF THE CHECK DAMS SHALL BE REMOVED WHEN THE SEDIMENT DEPTH IS WITHIN  $\frac{1}{2}$  OF THE HEIGHT OF THE CREST.
- 5. CHECK DAMS ARE TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND APPROVED BY THE LOCAL JURISDICTION.
- 6. WHEN CHECK DAMS ARE REMOVED, EXCAVATIONS SHALL BE FILLED WITH SUITABLE COMPACTED BACKFILL. DISTURBED AREA SHALL BE SEEDED AND MULCHED AND COVERED WITH GEOTEXTILE OR OTHERWISE STABILIZED IN A MANNER APPROVED BY THE LOCAL JURISDICTION.

(DETAILS ADAPTED FROM DOUGLAS COUNTY, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

STORMWATER QUALITY CALCULATIONS



|                                       | Design Procedure Form: Extended Detention Basin (EDB)                                            |                                                                           |  |  |  |  |
|---------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--|--|--|--|
|                                       | UD-BMP                                                                                           | (Version 3.07, March 2018) Sheet 1 of 3                                   |  |  |  |  |
| Designer:                             | Marc A. Whorton, P.E.                                                                            |                                                                           |  |  |  |  |
| Company:                              | Classic Consulting                                                                               |                                                                           |  |  |  |  |
| Date:                                 | March 16, 2022                                                                                   |                                                                           |  |  |  |  |
| Project:                              | Retreat at TimberRidge Filing No. 2                                                              |                                                                           |  |  |  |  |
| Location:                             | Pond 3                                                                                           |                                                                           |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
| Basin Storage \                       | /olume                                                                                           |                                                                           |  |  |  |  |
| A) Effective Imp                      | erviousness of Tributary Area, I <sub>a</sub>                                                    | l <sub>a</sub> = 12.6 %                                                   |  |  |  |  |
| B) Tributary Are                      | a's Imperviousness Ratio (i = I <sub>a</sub> / 100 )                                             | i = 0.126                                                                 |  |  |  |  |
| 0) 0 17 17                            |                                                                                                  |                                                                           |  |  |  |  |
| C) Contributing                       | Watershed Area                                                                                   | Area = <u>58.300</u> ac                                                   |  |  |  |  |
|                                       | neds Outside of the Denver Region, Depth of Average                                              | d <sub>6</sub> = 0.42 in                                                  |  |  |  |  |
| Runoff Prod                           | ucing Storm                                                                                      | Choose One                                                                |  |  |  |  |
| E) Design Cond                        | cept<br>V when also designing for flood control)                                                 | ○ Water Quality Capture Volume (WQCV)                                     |  |  |  |  |
| (Select LON                           | v when also designing for 1100d control)                                                         | Excess Urban Runoff Volume (EURV)                                         |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
|                                       | me (WQCV) Based on 40-hour Drain Time                                                            | V <sub>DESIGN</sub> = ac-ft                                               |  |  |  |  |
| $(V_{DESIGN} = (1$                    | 1.0 * (0.91 * i³ - 1.19 * i² + 0.78 * i) / 12 * Area )                                           |                                                                           |  |  |  |  |
|                                       | neds Outside of the Denver Region,                                                               | V <sub>DESIGN OTHER</sub> = 0.385 ac-ft                                   |  |  |  |  |
|                                       | ty Capture Volume (WQCV) Design Volume<br>$_{R} = (d_{6}^{*}(V_{DESIGN}/0.43))$                  |                                                                           |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
|                                       | f Water Quality Capture Volume (WQCV) Design Volume<br>ferent WQCV Design Volume is desired)     | V <sub>DESIGN USER</sub> = ac-ft                                          |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
|                                       | logic Soil Groups of Tributary Watershed<br>ige of Watershed consisting of Type A Soils          | HSG <sub>A</sub> = 0 %                                                    |  |  |  |  |
| ii) Percenta                          | age of Watershed consisting of Type B Soils                                                      | HSG <sub>B</sub> = 100 %                                                  |  |  |  |  |
| iii) Percent                          | age of Watershed consisting of Type C/D Soils                                                    | HSG <sub>C/D</sub> = 0 %                                                  |  |  |  |  |
|                                       | n Runoff Volume (EURV) Design Volume                                                             |                                                                           |  |  |  |  |
| For HSG A:                            | : EURV <sub>A</sub> = 1.68 * i <sup>1.28</sup><br>: EURV <sub>B</sub> = 1.36 * i <sup>1.08</sup> | EURV <sub>DESIGN</sub> = 0.705 ac-f t                                     |  |  |  |  |
| For HSG C                             | $D: EURV_{C/D} = 1.30 * i^{1.08}$                                                                |                                                                           |  |  |  |  |
| K) User Input o                       | f Excess Urban Runoff Volume (EURV) Design Volume                                                | EURV <sub>DESIGN USER</sub> = ac-f t                                      |  |  |  |  |
|                                       | ferent EURV Design Volume is desired)                                                            | 25 N DESIGN USER                                                          |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
|                                       | ength to Width Ratio                                                                             | L:W= 2.0:1                                                                |  |  |  |  |
| (A basin length                       | to width ratio of at least 2:1 will improve TSS reduction.)                                      |                                                                           |  |  |  |  |
| 2 Pi- 0id- 0i                         |                                                                                                  |                                                                           |  |  |  |  |
| Basin Side Slop                       | es                                                                                               |                                                                           |  |  |  |  |
|                                       | num Side Slopes                                                                                  | Z = 4.00 ft / ft                                                          |  |  |  |  |
| (Horizoniai d                         | distance per unit vertical, 4:1 or flatter preferred)                                            |                                                                           |  |  |  |  |
| 4 Inlat                               |                                                                                                  |                                                                           |  |  |  |  |
| 4. Inlet                              |                                                                                                  |                                                                           |  |  |  |  |
| A) Describe me<br>inflow location     | eans of providing energy dissipation at concentrated                                             |                                                                           |  |  |  |  |
| illiow locatio                        | ons.                                                                                             |                                                                           |  |  |  |  |
| 5. Forebay                            |                                                                                                  |                                                                           |  |  |  |  |
| ъ. гогерау                            |                                                                                                  | l                                                                         |  |  |  |  |
| A) Minimum Fo                         |                                                                                                  | V <sub>FMIN</sub> = 0.012 ac-ft                                           |  |  |  |  |
|                                       |                                                                                                  | l                                                                         |  |  |  |  |
| B) Actual Foreb                       | pay Volume                                                                                       | V <sub>F</sub> = 0.012 ac-ft                                              |  |  |  |  |
| C) Forebay Dep                        |                                                                                                  | l                                                                         |  |  |  |  |
| (D <sub>F</sub>                       | = <u>18</u> inch maximum)                                                                        | D <sub>F</sub> = 18.0 in                                                  |  |  |  |  |
| D) Forebay Disc                       | charge                                                                                           |                                                                           |  |  |  |  |
| i) [Indetaine                         | ed 100-year Peak Discharge                                                                       | Q <sub>100</sub> = 79.00 cfs                                              |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
| ii) Forebay<br>(Q <sub>F</sub> = 0.02 | Discharge Design Flow<br>2 * Q <sub>100</sub> )                                                  | Q <sub>F</sub> = 1.58 cfs                                                 |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
| E) Forebay Disc                       | charge Design                                                                                    | Choose One                                                                |  |  |  |  |
|                                       |                                                                                                  | ● Berm With Pipe Flow too small for berm w/ pipe  ● Wall with Rect. Notch |  |  |  |  |
|                                       |                                                                                                  | Wall with V-Notch Weir                                                    |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |
| F) Discharge Pi                       | pe Size (minimum 8-inches)                                                                       | Calculated D <sub>P</sub> =in                                             |  |  |  |  |
| G) Rectangular                        | Notch Width                                                                                      | Calculated W <sub>N</sub> = 6.7 in                                        |  |  |  |  |
|                                       |                                                                                                  |                                                                           |  |  |  |  |

118520-UD-BMP\_v3.07 REV, EDB 3/16/2022, 3:17 PM

| Design Procedure Form: Extended Detention Basin (EDB)                                                                                                                                                      |                                                                                      |                                                        |                                                     |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------------|--|--|
|                                                                                                                                                                                                            |                                                                                      |                                                        | Sheet 2 of 3                                        |  |  |
| Designer:                                                                                                                                                                                                  | Marc A. Whorton, P.E.  Classic Consulting                                            |                                                        |                                                     |  |  |
| Company:<br>Date:                                                                                                                                                                                          | March 16, 2022                                                                       |                                                        |                                                     |  |  |
| Project:                                                                                                                                                                                                   | Retreat at TimberRidge Filing No. 2                                                  |                                                        |                                                     |  |  |
| Location:                                                                                                                                                                                                  | Pond 3                                                                               |                                                        |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      | _                                                      |                                                     |  |  |
| 6. Trickle Channel                                                                                                                                                                                         |                                                                                      | Choose Ōne  Concrete                                   |                                                     |  |  |
| A) Type of Trickle Channel                                                                                                                                                                                 |                                                                                      | 0                                                      | ETE TRICKLE CHANNEL,<br>D BE BETWEEN<br>0 FT/FT     |  |  |
| F) Slope of Tric                                                                                                                                                                                           | ckle Channel                                                                         | S = 0.0130 ft / ft                                     |                                                     |  |  |
| 7. Micropool and C                                                                                                                                                                                         | Dutlet Structure                                                                     |                                                        |                                                     |  |  |
| A) Depth of Mic                                                                                                                                                                                            | cropool (2.5-feet minimum)                                                           | $D_{\rm M} = \frac{2.5}{}$ ft                          |                                                     |  |  |
| B) Surface Area                                                                                                                                                                                            | a of Micropool (10 ft² minimum)                                                      | A <sub>M</sub> = 132 sq ft                             |                                                     |  |  |
| C) Outlet Type                                                                                                                                                                                             |                                                                                      | 「Choose One                                            |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      | Orifice Plate                                          |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      | Other (Describe):                                      |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      |                                                        |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      |                                                        |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      |                                                        |                                                     |  |  |
| D) Smallest Dir                                                                                                                                                                                            | mension of Orifice Opening Based on Hydrograph Routing                               |                                                        |                                                     |  |  |
| (Use UD-Detent                                                                                                                                                                                             | tion)                                                                                | D <sub>orifice</sub> = 1.25 inches                     |                                                     |  |  |
| E) Total Outlet A                                                                                                                                                                                          | Area                                                                                 | A <sub>ot</sub> = 3.81 square inches                   |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      |                                                        |                                                     |  |  |
| Initial Surcharge                                                                                                                                                                                          | e Volume                                                                             |                                                        |                                                     |  |  |
| A) Depth of Init                                                                                                                                                                                           | ial Surcharge Volume                                                                 | D <sub>IS</sub> = 6 in                                 |                                                     |  |  |
|                                                                                                                                                                                                            | commended depth is 4 inches)                                                         | D <sub>IS</sub> - 0   III                              |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      | V <sub>IS</sub> = 50 cu ft                             |                                                     |  |  |
| B) Minimum Initial Surcharge Volume (Minimum volume of 0.3% of the WQCV)                                                                                                                                   |                                                                                      | V <sub>IS</sub> = cu ft                                |                                                     |  |  |
|                                                                                                                                                                                                            |                                                                                      | V <sub>s</sub> = 66.0 cu ft                            |                                                     |  |  |
| C) Illitial Surcha                                                                                                                                                                                         | arge Provided Above Micropool                                                        | V <sub>s</sub> = 66.0 cu ft                            |                                                     |  |  |
| 9. Trash Rack                                                                                                                                                                                              |                                                                                      |                                                        |                                                     |  |  |
| A) Water Qualit                                                                                                                                                                                            | ty Screen Open Area: A <sub>t</sub> = A <sub>ct</sub> * 38.5*(e <sup>-0.095D</sup> ) | A <sub>t</sub> = 130 square inches                     |                                                     |  |  |
| B) Type of Screen (If specifying an alternative to the materials recommended in the USDCM, indicate "other" and enter the ratio of the total open are to the total screen are for the material specified.) |                                                                                      | Aluminum Amico-Klemp SR Series with Cross Rods 2* O.C. | _                                                   |  |  |
|                                                                                                                                                                                                            | Other (Y/N): N                                                                       |                                                        | -<br>-                                              |  |  |
| C) Ratio of Tota                                                                                                                                                                                           | al Open Area to Total Area (only for type 'Other')                                   | User Ratio =                                           |                                                     |  |  |
| D) Total Water (                                                                                                                                                                                           | Quality Screen Area (based on screen type)                                           | A <sub>total</sub> = 183 sq. in.                       |                                                     |  |  |
|                                                                                                                                                                                                            | sign Volume (EURV or WQCV)<br>design concept chosen under 1E)                        | H= 5 feet                                              |                                                     |  |  |
| F) Height of Wa                                                                                                                                                                                            | ater Quality Screen (H <sub>TR</sub> )                                               | H <sub>TR</sub> = 88 inches                            |                                                     |  |  |
|                                                                                                                                                                                                            | ter Quality Screen Opening (W <sub>opening</sub> ) inches is recommended)            | oporang                                                | HAN RECOMMENDED MIN. WIDTH.<br>EN SET TO 12 INCHES. |  |  |

118520-UD-BMP\_v3.07 REV, EDB 3/16/2022, 3:17 PM

| Design Procedure Form: Extended Detention Basin (EDB)   |                                                                                                                                                    |                               |              |  |  |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--------------|--|--|
| Designer:<br>Company:<br>Date:<br>Project:<br>Location: | Marc A. Whorton, P.E. Classic Consulting March 16, 2022 Retreat at TimberRidge Filing No. 2 Pond 3                                                 |                               | Sheet 3 of 3 |  |  |
| B) Slope of 0                                           | bankment embankment protection for 100-year and greater overtopping:  Overflow Embankment al distance per unit vertical, 4:1 or flatter preferred) | Ze = 4.00 ft / ft  Choose One |              |  |  |
| 12. Access A) Describe Notes:                           | Sediment Removal Procedures                                                                                                                        |                               |              |  |  |

118520-UD-BMP\_v3.07 REV, EDB 3/16/2022, 3:17 PM

#### Design Procedure Form: Runoff Reduction UD-BMP (Version 3.07, March 2018) Sheet 1 of 1 Designer: Marc A. Whorton, P.E. Classic Consulting Company: March 17, 2022 Date: Project: Retreat at TimberRidge Filing No. 2 BASINS NOT TRIBUTARY TO PERMANENT SWQ FACILITY Location: SITE INFORMATION (User Input in Blue Cells) WQCV Rainfall Depth 0.53 inches Depth of Average Runoff Producing Storm, $d_6$ = inches (for Watersheds Outside of the Denver Region, Figure 3-1 in USDCM Vol. 3) 0.42 UIA:RPA UIA:RPA UIA:RPA UIA:RPA UIA:RPA UIA:RPA Area Type Area ID Basin E1 Basin H1 Basin W Basin V Basin K Basin I Downstream Design Point ID SC SC DP-15 DP-15 Sed. Basin Sed. Basin Downstream BMP Type None None None None None None DCIA (ft<sup>2</sup>) 28,800 17,675 46,890 59,560 52,250 16,480 UIA (ft<sup>2</sup>) 26,200 5,060 14,420 20,200 11,800 6,240 RPA (ft2 SPA (ft2 0% 0% 0% 0% HSG A (%) 0% 0% HSG B (% 100% 100% 100% 100% 100% 100% HSG C/D (%) 0% 0% 0% 0% 0% 0% Average Slope of RPA (ft/ft) 0.018 0.020 0.020 0.030 0.040 0.040 UIA:RPA Interface Width (ft) 30.00 200.00 550.00 1000.00 450.00 200.00 CALCULATED RUNOFF RESULTS Area ID Basin E1 Basin H1 Basin W Basin V Basin K Basin L UIA:RPA Area (ft2) 55,000 22,735 61,310 79,760 64,050 22,720 L / W Ratio 0.57 0.20 0.08 0.32 0.57 UIA / Area 0.5236 0.7774 0.7648 0.7467 0.8158 0.7254 Runoff (in) 0.00 0.08 0.05 0.02 0.12 0.01 145 253 138 11 0 659 Runoff (ft3) Runoff Reduction (ft3) 1032 489 1427 1996 1213 580 **CALCULATED WQCV RESULTS** Area ID Basin E1 Basin H1 Basin W Basin V Basin K Basin L 1172 719 1908 2424 2126 671 WQCV (ft3) 1172 1655 2286 1467 660 WQCV Reduction (ft3) 575 WQCV Reduction (%) 100% 80% 87% 94% 69% 98% 145 138 659 11 Untreated WQCV (ft3) 253 0 CALCULATED DESIGN POINT RESULTS (sums results from all columns with the same Downstream Design Point ID) Downstream Design Point ID SC DP-15 Sed. Basin DCIA (ft2) 0 0 0 46,475 106,450 68,730 UIA (ft2) RPA (ft<sup>2</sup>) 31,260 34,620 18,040 SPA (ft2 0 0 0 Total Area (ft2) 77,735 141,070 86.770 Total Impervious Area (ft2) 46,475 106,450 68,730 WQCV (ft3) 1,891 4,332 2,797 1,747 3,941 2,127 WQCV Reduction (ft3) WQCV Reduction (%) 92% 76% Untreated WQCV (ft3) 145 391 670 CALCULATED SITE RESULTS (sums results from all columns in worksheet)

| Total Area (ft <sup>2</sup> ) | 305,575 |
|-------------------------------|---------|
| Total Impervious Area (ft2)   | 221,655 |
| WQCV (ft3)                    | 9,021   |
| WQCV Reduction (ft3)          | 7,815   |
| WQCV Reduction (%)            | 87%     |
| Untreated WQCV (ft3)          | 1,205   |


**DETENTION POND CALCULATIONS** 



### DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

#### Project: RETREAT AT TIMBERRIDGE FILING NO. 2



#### Watershed Information

| Selected BMP Type =                            | EDB    |         |  |  |  |  |  |
|------------------------------------------------|--------|---------|--|--|--|--|--|
| Watershed Area =                               | 101.20 | acres   |  |  |  |  |  |
| Watershed Length =                             | 4,000  | ft      |  |  |  |  |  |
| Watershed Length to Centroid =                 | 2,000  | ft      |  |  |  |  |  |
| Watershed Slope =                              | 0.032  | ft/ft   |  |  |  |  |  |
| Watershed Imperviousness =                     | 21.70% | percent |  |  |  |  |  |
| Percentage Hydrologic Soil Group A =           | 0.0%   | percent |  |  |  |  |  |
| Percentage Hydrologic Soil Group B =           | 100.0% | percent |  |  |  |  |  |
| Percentage Hydrologic Soil Groups C/D =        | 0.0%   | percent |  |  |  |  |  |
| Target WQCV Drain Time =                       | 40.0   | hours   |  |  |  |  |  |
| Location for 1-br Rainfall Denths = User Input |        |         |  |  |  |  |  |

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

| the embedded Colorado Orban Hydro      | grapii Procedu | ire.      |
|----------------------------------------|----------------|-----------|
| Water Quality Capture Volume (WQCV) =  | 1.033          | acre-feet |
| Excess Urban Runoff Volume (EURV) =    | 2.196          | acre-feet |
| 2-yr Runoff Volume (P1 = 1.19 in.) =   | 2.378          | acre-feet |
| 5-yr Runoff Volume (P1 = 1.5 in.) =    | 4.231          | acre-feet |
| 10-yr Runoff Volume (P1 = 1.75 in.) =  | 5.985          | acre-feet |
| 25-yr Runoff Volume (P1 = 2 in.) =     | 8.800          | acre-feet |
| 50-yr Runoff Volume (P1 = 2.25 in.) =  | 10.837         | acre-feet |
| 100-yr Runoff Volume (P1 = 2.52 in.) = | 13.643         | acre-feet |
| 500-yr Runoff Volume (P1 = 3.85 in.) = | 25.127         | acre-feet |
| Approximate 2-yr Detention Volume =    | 1.519          | acre-feet |
| Approximate 5-yr Detention Volume =    | 2.234          | acre-feet |
| Approximate 10-yr Detention Volume =   | 3.529          | acre-feet |
| Approximate 25-yr Detention Volume =   | 4.308          | acre-feet |
| Approximate 50-yr Detention Volume =   | 4.550          | acre-feet |
| Approximate 100-yr Detention Volume =  | 5.553          | acre-feet |
|                                        |                |           |

#### Optional User Overrides

| Optional osci | Overnues  |
|---------------|-----------|
|               | acre-feet |
|               | acre-feet |
| 1.19          | inches    |
| 1.50          | inches    |
| 1.75          | inches    |
| 2.00          | inches    |
| 2.25          | inches    |
| 2.52          | inches    |
| 3.85          | inches    |
|               |           |


## Define Zones and Basin Geometry

| efine Zones and Basin Geometry                          |       |                 |
|---------------------------------------------------------|-------|-----------------|
| Zone 1 Volume (WQCV) =                                  | 1.033 | acre-fee        |
| Zone 2 Volume (EURV - Zone 1) =                         | 1.163 | acre-fee        |
| Zone 3 Volume (100-year - Zones 1 & 2) =                | 3.357 | acre-fee        |
| Total Detention Basin Volume =                          | 5.553 | acre-fee        |
| Initial Surcharge Volume (ISV) =                        | user  | ft <sup>3</sup> |
| Initial Surcharge Depth (ISD) =                         | user  | ft              |
| Total Available Detention Depth (H <sub>total</sub> ) = | user  | ft              |
| Depth of Trickle Channel (H <sub>TC</sub> ) =           | user  | ft              |
| Slope of Trickle Channel $(S_{TC}) =$                   | user  | ft/ft           |
| Slopes of Main Basin Sides (Smain) =                    | user  | H:V             |
| Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =       | user  |                 |
|                                                         |       |                 |

| Initial Surcharge Area $(A_{ISV}) =$            | user | ft 2            |
|-------------------------------------------------|------|-----------------|
| Surcharge Volume Length $(L_{ISV}) =$           | user | ft              |
| Surcharge Volume Width $(W_{ISV}) =$            | user | ft              |
| Depth of Basin Floor $(H_{FLOOR}) =$            | user | ft              |
| Length of Basin Floor $(L_{FLOOR})$ =           | user | ft              |
| Width of Basin Floor $(W_{FLOOR}) =$            | user | ft              |
| Area of Basin Floor $(A_{FLOOR}) =$             | user | ft 2            |
| Volume of Basin Floor (V <sub>FLOOR</sub> ) =   | user | ft <sup>3</sup> |
| Depth of Main Basin (H <sub>MAIN</sub> ) =      | user | ft              |
| Length of Main Basin $(L_{MAIN}) =$             | user | ft              |
| Width of Main Basin (W <sub>MAIN</sub> ) =      | user | ft              |
| Area of Main Basin (A <sub>MAIN</sub> ) =       | user | ft 2            |
| Volume of Main Basin (V <sub>MAIN</sub> ) =     | user | ft <sup>3</sup> |
| Calculated Total Basin Volume ( $V_{total}$ ) = | user | acre-fe         |
|                                                 |      |                 |

| Depth Increment =              | 1.00          | l <sub>ft</sub>        |                |               |                |                                     |                |                    |                   |
|--------------------------------|---------------|------------------------|----------------|---------------|----------------|-------------------------------------|----------------|--------------------|-------------------|
|                                |               | Optional               |                |               |                | Optional                            |                | Volume             |                   |
| Stage - Storage<br>Description | Stage<br>(ft) | Override<br>Stage (ft) | Length<br>(ft) | Width<br>(ft) | Area<br>(ft 2) | Override<br>Area (ft <sup>2</sup> ) | Area<br>(acre) | (ft <sup>3</sup> ) | Volume<br>(ac-ft) |
| Top of Micropool               |               | 0.00                   |                |               |                | 277                                 | 0.006          | ()                 | (de it)           |
| 7162                           |               | 2.00                   |                | -             |                | 10,268                              | 0.236          | 10,545             | 0.242             |
| 7264                           |               | 4.00                   |                |               |                | 30,108                              | 0.691          | 50,921             | 1.169             |
| 7166                           |               | 6.00                   |                |               |                | 38,919                              | 0.893          | 119,948            | 2.754             |
| 7168                           |               | 8.00                   |                | -             |                | 45,498                              | 1.044          | 204,365            | 4.692             |
| 7170                           |               | 10.00                  |                |               |                | 52,628                              | 1.208          | 302,491            | 6.944             |
| 7270                           |               | 10.00                  |                |               |                | 52,020                              | 11200          | 302,131            | 0.511             |
|                                | -             |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                | -             |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                | -             |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                | -             |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                | -             |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                | -             |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                | -             |                |                                     |                |                    |                   |
|                                | <br><br>      |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                | _                  |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                | <br><br>      |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                | -             |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               |                |                                     |                |                    |                   |
|                                |               |                        |                |               | -              |                                     |                | -                  |                   |

118520-MHFD-Detention\_v4 03 Exist. Pond 2, Basin

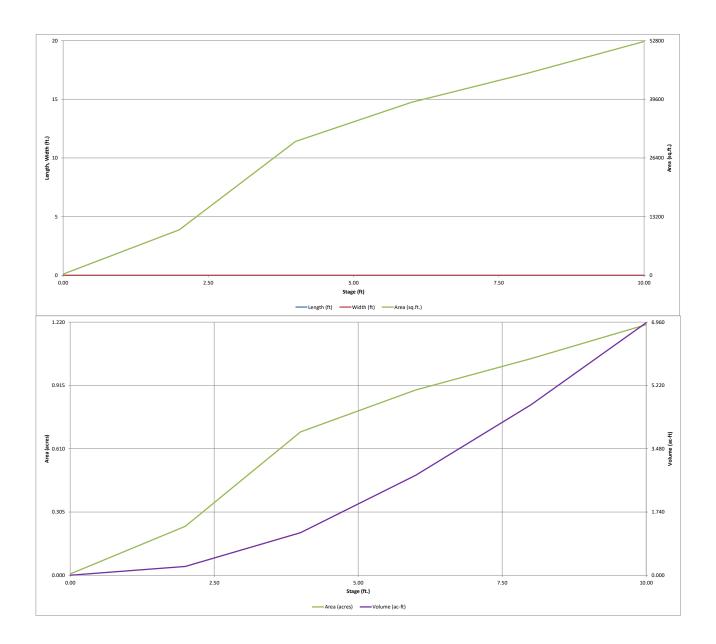

Project: RETREAT AT TIMBERRIDGE FILING NO. 2

inches



Underdrain Orifice Diameter =

|                  | Estimated         | Estimated      |                      |
|------------------|-------------------|----------------|----------------------|
|                  | Stage (ft)        | Volume (ac-ft) | Outlet Type          |
| Zone 1 (WQCV)    | 3.80              | 1.033          | Orifice Plate        |
| Zone 2 (EURV)    | 5.36              | 1.163          | Orifice Plate        |
| one 3 (100-year) | 8.80              | 3.357          | Weir&Pipe (Restrict) |
|                  | Total (all zones) | 5,553          |                      |

Underdrain Orifice Centroid =

feet

Example Zone Configuration (Retention Pond) <u>User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)</u> Calculated Parameters for Underdrain Underdrain Orifice Invert Depth = ft (distance below the filtration media surface) Underdrain Orifice Area

| User Input: Orifice Plate with one or more orific | Calculated Parame | ters for Plate                                |                            |     |                 |
|---------------------------------------------------|-------------------|-----------------------------------------------|----------------------------|-----|-----------------|
| Invert of Lowest Orifice =                        | 0.00              | ft (relative to basin bottom at Stage = 0 ft) | WQ Orifice Area per Row =  | N/A | ft <sup>2</sup> |
| Depth at top of Zone using Orifice Plate =        | 5.50              | ft (relative to basin bottom at Stage = 0 ft) | Elliptical Half-Width =    | N/A | feet            |
| Orifice Plate: Orifice Vertical Spacing =         | 16.50             | inches                                        | Elliptical Slot Centroid = | N/A | feet            |
| Orifice Plate: Orifice Area per Row =             | N/A               | inches                                        | Elliptical Slot Area =     | N/A | ft <sup>2</sup> |

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest) Row 1 (required) Row 2 (optional) Row 3 (optional) Row 4 (optional) Row 5 (optional) Row 6 (optional) Row 7 (optional) Row 8 (optional) Stage of Orifice Centroid (ft) 0.00 1.40 2.80 4.20 Orifice Area (sq. inches) 3.00 4.00 4.00 4.00

| ı                              |                  |                   |                   |                   |                   |                   |                   |                   |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |


| User Input: Vertical Orifice (Circular or Rectangular) |              |              |                                               |                             | Calculated Parame | ters for Vertical Ori | fice            |
|--------------------------------------------------------|--------------|--------------|-----------------------------------------------|-----------------------------|-------------------|-----------------------|-----------------|
|                                                        | Not Selected | Not Selected |                                               |                             | Not Selected      | Not Selected          |                 |
| Invert of Vertical Orifice =                           | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) | Vertical Orifice Area =     | N/A               | N/A                   | ft <sup>2</sup> |
| Depth at top of Zone using Vertical Orifice =          | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) | Vertical Orifice Centroid = | N/A               | N/A                   | feet            |
| Vertical Orifice Diameter -                            | N/A          | NI/A         | linches                                       |                             |                   |                       | •               |

| User Input: Overflow Weir (Dropbox with Flat o | Calculated Parameters for Overflow Weir |              |                                                                                   |             |              |                 |
|------------------------------------------------|-----------------------------------------|--------------|-----------------------------------------------------------------------------------|-------------|--------------|-----------------|
|                                                | Zone 3 Weir                             | Not Selected |                                                                                   | Zone 3 Weir | Not Selected | 1               |
| Overflow Weir Front Edge Height, Ho =          | 5.50                                    | N/A          | ft (relative to basin bottom at Stage = 0 ft) Height of Grate Upper Edge, $H_t$ = | 6.50        | N/A          | feet            |
| Overflow Weir Front Edge Length =              | 8.00                                    | N/A          | feet Overflow Weir Slope Length =                                                 | 4.12        | N/A          | feet            |
| Overflow Weir Grate Slope =                    | 4.00                                    | N/A          | H:V Grate Open Area / 100-yr Orifice Area =                                       | 2.57        | N/A          | 1               |
| Horiz. Length of Weir Sides =                  | 4.00                                    | N/A          | feet Overflow Grate Open Area w/o Debris =                                        | 24.74       | N/A          | ft <sup>2</sup> |
| Overflow Grate Open Area % =                   | 75%                                     | N/A          | %, grate open area/total area                                                     | 12.37       | N/A          | ft <sup>2</sup> |
| Dehris Clogging % =                            | 50%                                     | N/A          | <b>1</b> %                                                                        |             |              |                 |

| User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice) |                   |              |                                                  |                               | s for Outlet Pipe w/ | Flow Restriction P | late            |
|----------------------------------------------------------------------------------------------------------------|-------------------|--------------|--------------------------------------------------|-------------------------------|----------------------|--------------------|-----------------|
|                                                                                                                | Zone 3 Restrictor | Not Selected |                                                  |                               | Zone 3 Restrictor    | Not Selected       |                 |
| Depth to Invert of Outlet Pipe =                                                                               | 1.00              | N/A          | ft (distance below basin bottom at Stage = 0 ft) | Outlet Orifice Area =         | 9.62                 | N/A                | ft <sup>2</sup> |
| Outlet Pipe Diameter =                                                                                         | 42.00             | N/A          | inches                                           | Outlet Orifice Centroid =     | 1.75                 | N/A                | feet            |
| Restrictor Plate Height Above Pipe Invert =                                                                    | 42.00             |              | inches Half-Central Angle                        | of Restrictor Plate on Pipe = | 3.14                 | N/A                | radians         |

| User Input: Emergency Spillway (Rectangular or | Trapezoidal) |                                               |                                    | Calculated Parame   | aters for Spillway |
|------------------------------------------------|--------------|-----------------------------------------------|------------------------------------|---------------------|--------------------|
| Oser Input. Emergency Spiliway (Rectangular of | Trapezoluar) | 1                                             |                                    | Calculated Farantie | Ters for Spiliway  |
| Spillway Invert Stage=                         | 9.00         | ft (relative to basin bottom at Stage = 0 ft) | Spillway Design Flow Depth=        | 0.77                | feet               |
| Spillway Crest Length =                        | 65.00        | feet                                          | Stage at Top of Freeboard =        | 10.77               | feet               |
| Spillway End Slopes =                          | 3.00         | H:V                                           | Basin Area at Top of Freeboard =   | 1.21                | acres              |
| Freeboard above Max Water Surface =            | 1.00         | feet                                          | Basin Volume at Top of Freeboard = | 6.94                | acre-ft            |
|                                                |              |                                               |                                    |                     | <del>-</del>       |

| Routed Hydrograph Results                       | The user can overi | he user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF). |        |                 |                 |                 |                 |                 |          |  |
|-------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------|-----------------|-----------------|-----------------|-----------------|----------|--|
| Design Storm Return Period =                    | WQCV               | EURV                                                                                                                                                | 2 Year | 5 Year          | 10 Year         | 25 Year         | 50 Year         | 100 Year        | 500 Year |  |
| One-Hour Rainfall Depth (in) =                  | N/A                | N/A                                                                                                                                                 | 1.19   | 1.50            | 1.75            | 2.00            | 2.25            | 2.52            | 3.85     |  |
| CUHP Runoff Volume (acre-ft) =                  | 1.033              | 2.196                                                                                                                                               | 2.378  | 4.231           | 5.985           | 8.800           | 10.837          | 13.643          | 25.127   |  |
| Inflow Hydrograph Volume (acre-ft) =            | N/A                | N/A                                                                                                                                                 | 2.378  | 4.231           | 5.985           | 8.800           | 10.837          | 13.643          | 25.127   |  |
| CUHP Predevelopment Peak Q (cfs) =              | N/A                | N/A                                                                                                                                                 | 9.1    | 25.4            | 39.2            | 71.6            | 90.0            | 115.0           | 215.1    |  |
| OPTIONAL Override Predevelopment Peak Q (cfs) = | N/A                | N/A                                                                                                                                                 |        |                 |                 |                 |                 |                 |          |  |
| Predevelopment Unit Peak Flow, q (cfs/acre) =   | N/A                | N/A                                                                                                                                                 | 0.09   | 0.25            | 0.39            | 0.71            | 0.89            | 1.14            | 2.13     |  |
| Peak Inflow Q (cfs) =                           | N/A                | N/A                                                                                                                                                 | 24.5   | 43.1            | 57.8            | 90.5            | 110.1           | 135.8           | 242.6    |  |
| Peak Outflow Q (cfs) =                          | 0.5                | 0.9                                                                                                                                                 | 0.9    | 13.5            | 28.3            | 55.8            | 72.1            | 96.2            | 218.8    |  |
| Ratio Peak Outflow to Predevelopment Q =        | N/A                | N/A                                                                                                                                                 | N/A    | 0.5             | 0.7             | 0.8             | 0.8             | 0.8             | 1.0      |  |
| Structure Controlling Flow =                    | Plate              | Plate                                                                                                                                               | Plate  | Overflow Weir 1 | Spillway |  |
| Max Velocity through Grate 1 (fps) =            | N/A                | N/A                                                                                                                                                 | N/A    | 0.5             | 1.1             | 2.2             | 2.9             | 3.8             | 5.0      |  |
| Max Velocity through Grate 2 (fps) =            | N/A                | N/A                                                                                                                                                 | N/A    | N/A             | N/A             | N/A             | N/A             | N/A             | N/A      |  |
| Time to Drain 97% of Inflow Volume (hours) =    | 43                 | 59                                                                                                                                                  | 62     | 59              | 56              | 52              | 49              | 46              | 35       |  |
| Time to Drain 99% of Inflow Volume (hours) =    | 46                 | 65                                                                                                                                                  | 68     | 69              | 67              | 64              | 62              | 59              | 53       |  |
| Maximum Ponding Depth (ft) =                    | 3.80               | 5.36                                                                                                                                                | 5.37   | 6.27            | 6.70            | 7.29            | 7.68            | 8.30            | 9.61     |  |
| Area at Maximum Ponding Depth (acres) =         |                    | 0.83                                                                                                                                                | 0.83   | 0.91            | 0.95            | 0.99            | 1.02            | 1.07            | 1.18     |  |
| Maximum Volume Stored (acre-ft) =               | 1.035              | 2.203                                                                                                                                               | 2.203  | 2.988           | 3.388           | 3.969           | 4.351           | 4.998           | 6.468    |  |

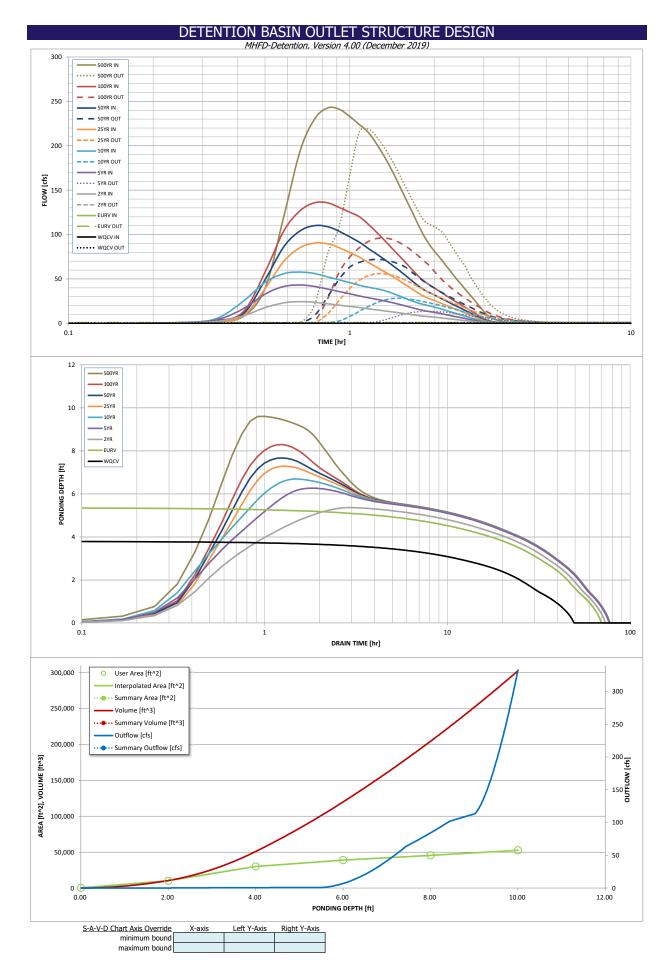

Outflow Hydrograph Workbook Filename:

#### Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

| ı             | SOURCE             | CUHP       | CUHP       | CUHP          | CUHP           | CUHP           | CUHP           | CUHP           | CUHP           | CUHP             |
|---------------|--------------------|------------|------------|---------------|----------------|----------------|----------------|----------------|----------------|------------------|
| Time Taken al |                    |            |            |               |                |                |                |                |                |                  |
| Time Interval | TIME               | WQCV [cfs] | EURV [cfs] | 2 Year [cfs]  | 5 Year [cfs]   |                | 25 Year [cfs]  | 50 Year [cfs]  |                | 500 Year [cfs]   |
| 5.00 min      | 0:00:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 0:05:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 0:10:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.05           | 0.01           | 0.34             |
|               | 0:15:00            | 0.00       | 0.00       | 0.43          | 0.71           | 0.88           | 0.60           | 0.78           | 0.73           | 1.68             |
|               | 0:20:00<br>0:25:00 | 0.00       | 0.00       | 1.88          | 3.68           | 5.01           | 1.98           | 2.53           | 3.03           | 7.56             |
|               | 0:30:00            | 0.00       | 0.00       | 8.30<br>17.70 | 16.23<br>32.99 | 24.40<br>46.22 | 8.18<br>39.10  | 10.13<br>48.93 | 12.46<br>57.61 | 39.19<br>120.72  |
|               | 0:35:00            | 0.00       | 0.00       | 23.11         | 41.58          | 56.04          | 69.97          | 86.40          | 104.22         | 194.66           |
|               | 0:40:00            | 0.00       | 0.00       | 24.51         | 43.12          | 57.85          | 85.42          | 104.29         | 127.00         | 230.10           |
|               | 0:45:00            | 0.00       | 0.00       | 23.78         | 41.51          | 56.11          | 90.49          | 110.08         | 135.80         | 242.56           |
|               | 0:50:00            | 0.00       | 0.00       | 22.05         | 38.65          | 52.45          | 89.78          | 109.04         | 135.78         | 241.28           |
|               | 0:55:00            | 0.00       | 0.00       | 20.40         | 35.83          | 48.94          | 85.26          | 103.71         | 130.68         | 232.90           |
|               | 1:00:00            | 0.00       | 0.00       | 19.01         | 33.24          | 45.82          | 79.79          | 97.41          | 125.23         | 223.76           |
|               | 1:05:00            | 0.00       | 0.00       | 17.71         | 30.78          | 42.88          | 74.48          | 91.27          | 119.94         | 214.82           |
|               | 1:10:00            | 0.00       | 0.00       | 16.40         | 28.78          | 40.68          | 68.45          | 84.18          | 111.34         | 201.40           |
|               | 1:15:00            | 0.00       | 0.00       | 15.16         | 27.04          | 38.95          | 63.00          | 77.83          | 102.14         | 187.03           |
|               | 1:20:00            | 0.00       | 0.00       | 14.00         | 25.21          | 36.76          | 57.94          | 71.71          | 93.19          | 171.66           |
|               | 1:25:00            | 0.00       | 0.00       | 12.87         | 23.33          | 33.96          | 53.02          | 65.61          | 84.35          | 155.54           |
| }             | 1:30:00<br>1:35:00 | 0.00       | 0.00       | 11.76         | 21.43          | 30.96<br>27.97 | 48.11          | 59.52          | 76.03          | 140.15           |
| ŀ             | 1:40:00            | 0.00       | 0.00       | 10.67<br>9.62 | 19.57<br>17.57 | 27.97          | 43.30<br>38.59 | 53.58<br>47.76 | 68.17<br>60.57 | 125.49<br>111.46 |
| ŀ             | 1:45:00            | 0.00       | 0.00       | 8.72          | 15.76          | 22.84          | 34.11          | 42.25          | 53.46          | 98.88            |
|               | 1:50:00            | 0.00       | 0.00       | 8.07          | 14.40          | 21.20          | 30.55          | 37.94          | 47.84          | 89.11            |
|               | 1:55:00            | 0.00       | 0.00       | 7.53          | 13.32          | 19.79          | 27.87          | 34.67          | 43.49          | 81.28            |
| ļ             | 2:00:00            | 0.00       | 0.00       | 7.00          | 12.33          | 18.34          | 25.64          | 31.94          | 39.78          | 74.51            |
|               | 2:05:00            | 0.00       | 0.00       | 6.41          | 11.28          | 16.74          | 23.42          | 29.17          | 36.17          | 67.74            |
|               | 2:10:00            | 0.00       | 0.00       | 5.80          | 10.19          | 15.09          | 21.23          | 26.41          | 32.66          | 61.03            |
|               | 2:15:00            | 0.00       | 0.00       | 5.20          | 9.13           | 13.49          | 19.13          | 23.78          | 29.34          | 54.67            |
|               | 2:20:00            | 0.00       | 0.00       | 4.63          | 8.12           | 11.96          | 17.12          | 21.26          | 26.22          | 48.70            |
|               | 2:25:00            | 0.00       | 0.00       | 4.10          | 7.15           | 10.52          | 15.21          | 18.87          | 23.33          | 43.16            |
|               | 2:30:00            | 0.00       | 0.00       | 3.58          | 6.22           | 9.15           | 13.37          | 16.58          | 20.55          | 37.86            |
|               | 2:35:00<br>2:40:00 | 0.00       | 0.00       | 3.08          | 5.32           | 7.85           | 11.58          | 14.35          | 17.82          | 32.72            |
|               | 2:45:00            | 0.00       | 0.00       | 2.59<br>2.11  | 4.44<br>3.59   | 6.60<br>5.38   | 9.81<br>8.08   | 12.16<br>10.02 | 15.12<br>12.46 | 27.66<br>22.67   |
|               | 2:50:00            | 0.00       | 0.00       | 1.65          | 2.77           | 4.20           | 6.38           | 7.91           | 9.82           | 17.76            |
|               | 2:55:00            | 0.00       | 0.00       | 1.21          | 2.00           | 3.10           | 4.71           | 5.84           | 7.24           | 13.10            |
|               | 3:00:00            | 0.00       | 0.00       | 0.86          | 1.46           | 2.36           | 3.17           | 3.94           | 4.90           | 9.30             |
|               | 3:05:00            | 0.00       | 0.00       | 0.65          | 1.14           | 1.90           | 2.23           | 2.84           | 3.46           | 6.82             |
|               | 3:10:00            | 0.00       | 0.00       | 0.53          | 0.93           | 1.56           | 1.62           | 2.10           | 2.51           | 5.08             |
|               | 3:15:00            | 0.00       | 0.00       | 0.43          | 0.77           | 1.29           | 1.22           | 1.59           | 1.81           | 3.76             |
|               | 3:20:00            | 0.00       | 0.00       | 0.36          | 0.63           | 1.06           | 0.92           | 1.21           | 1.30           | 2.77             |
|               | 3:25:00            | 0.00       | 0.00       | 0.30          | 0.52           | 0.87           | 0.71           | 0.94           | 0.92           | 2.02             |
|               | 3:30:00            | 0.00       | 0.00       | 0.24          | 0.42           | 0.69           | 0.55           | 0.72           | 0.64           | 1.44             |
|               | 3:35:00            | 0.00       | 0.00       | 0.20          | 0.33           | 0.54           | 0.42           | 0.55           | 0.46           | 1.05             |
|               | 3:40:00<br>3:45:00 | 0.00       | 0.00       | 0.16          | 0.26<br>0.20   | 0.42           | 0.33           | 0.43           | 0.37           | 0.81             |
| ŀ             | 3:50:00            | 0.00       | 0.00       | 0.13<br>0.10  | 0.20           | 0.32<br>0.25   | 0.26<br>0.20   | 0.34           | 0.29<br>0.23   | 0.63             |
|               | 3:55:00            | 0.00       | 0.00       | 0.10          | 0.13           | 0.19           | 0.20           | 0.20           | 0.23           | 0.30             |
|               | 4:00:00            | 0.00       | 0.00       | 0.06          | 0.08           | 0.14           | 0.12           | 0.15           | 0.14           | 0.29             |
|               | 4:05:00            | 0.00       | 0.00       | 0.04          | 0.05           | 0.09           | 0.08           | 0.11           | 0.10           | 0.20             |
| ļ             | 4:10:00            | 0.00       | 0.00       | 0.03          | 0.03           | 0.06           | 0.06           | 0.07           | 0.06           | 0.13             |
|               | 4:15:00            | 0.00       | 0.00       | 0.02          | 0.02           | 0.03           | 0.03           | 0.04           | 0.04           | 0.08             |
| }             | 4:20:00<br>4:25:00 | 0.00       | 0.00       | 0.01          | 0.01           | 0.01           | 0.02           | 0.02           | 0.02           | 0.04             |
|               | 4:30:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 4:35:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 4:40:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 4:45:00<br>4:50:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 4:55:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 5:00:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 5:05:00<br>5:10:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
| ŀ             | 5:15:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
| ļ             | 5:20:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 5:25:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 5:30:00<br>5:35:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
| ŀ             | 5:40:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
| ļ             | 5:45:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 5:50:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
|               | 5:55:00<br>6:00:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |
| l             | 0.00.00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00           | 0.00           | 0.00             |

MHFD-Detention, Version 4.03 (May 2020)

Summary Stage-Area-Volume-Discharge Relationships


The user can create a summary S-A-V-D by entering the desired stage increments and the remainder of the table will populate automatically. The user should graphically compare the summary S-A-V-D table to the full S-A-V-D table in the chart to confirm it captures all key transition points.

| Stage - Storage<br>Description | Stage<br>[ft] | Area<br>[ft²] | Area<br>[acres] | Volume<br>[ft <sup>3</sup> ] | Volume<br>[ac-ft] | Total<br>Outflow<br>[cfs] |                                                        |
|--------------------------------|---------------|---------------|-----------------|------------------------------|-------------------|---------------------------|--------------------------------------------------------|
|                                |               |               |                 |                              |                   |                           | For best results, include the                          |
|                                |               |               |                 |                              |                   |                           | stages of all grade slope                              |
|                                |               |               |                 |                              |                   |                           | changes (e.g. ISV and Floor<br>from the S-A-V table on |
|                                |               |               |                 |                              |                   |                           | Sheet 'Basin'.                                         |
|                                |               |               |                 |                              |                   |                           | _                                                      |
|                                |               |               |                 |                              |                   |                           | Also include the inverts of al                         |
|                                |               |               |                 |                              |                   |                           | outlets (e.g. vertical orifice,                        |
|                                |               |               |                 |                              |                   |                           | overflow grate, and spillway where applicable).        |
|                                |               |               |                 |                              |                   |                           | /                                                      |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | 4                                                      |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           | †                                                      |
|                                |               |               |                 |                              |                   |                           | †                                                      |
|                                |               |               |                 |                              |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | †                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           |                                                        |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 |                              |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           | ]                                                      |
|                                |               |               |                 |                              |                   |                           | 4                                                      |
|                                |               |               |                 |                              |                   |                           | +                                                      |
|                                |               |               |                 | 1                            |                   |                           | 1                                                      |
|                                |               |               |                 |                              |                   |                           | _                                                      |
|                                |               |               |                 |                              |                   |                           |                                                        |

### DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

#### Project: RETREAT AT TIMBERRIDGE FILING NO. 2



#### Watershed Information

| Selected BMP Type =                     | EDB        |         |
|-----------------------------------------|------------|---------|
| Watershed Area =                        | 58.30      | acres   |
| Watershed Length =                      | 3,400      | ft      |
| Watershed Length to Centroid =          | 1,500      | ft      |
| Watershed Slope =                       | 0.050      | ft/ft   |
| Watershed Imperviousness =              | 12.60%     | percent |
| Percentage Hydrologic Soil Group A =    | 0.0%       | percent |
| Percentage Hydrologic Soil Group B =    | 100.0%     | percent |
| Percentage Hydrologic Soil Groups C/D = | 0.0%       | percent |
| Target WQCV Drain Time =                | 40.0       | hours   |
| Location for 1-hr Rainfall Depths =     | User Input |         |

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

| the embedded Colorado Orban Hydro      | grapii Procedu | ire.      |
|----------------------------------------|----------------|-----------|
| Water Quality Capture Volume (WQCV) =  | 0.395          | acre-feet |
| Excess Urban Runoff Volume (EURV) =    | 0.703          | acre-feet |
| 2-yr Runoff Volume (P1 = 1.19 in.) =   | 0.904          | acre-feet |
| 5-yr Runoff Volume (P1 = 1.5 in.) =    | 1.876          | acre-feet |
| 10-yr Runoff Volume (P1 = 1.75 in.) =  | 2.832          | acre-feet |
| 25-yr Runoff Volume (P1 = 2 in.) =     | 4.494          | acre-feet |
| 50-yr Runoff Volume (P1 = 2.25 in.) =  | 5.642          | acre-feet |
| 100-yr Runoff Volume (P1 = 2.52 in.) = | 7.279          | acre-feet |
| 500-yr Runoff Volume (P1 = 3.85 in.) = | 13.819         | acre-feet |
| Approximate 2-yr Detention Volume =    | 0.460          | acre-feet |
| Approximate 5-yr Detention Volume =    | 0.708          | acre-feet |
| Approximate 10-yr Detention Volume =   | 1.336          | acre-feet |
| Approximate 25-yr Detention Volume =   | 1.794          | acre-feet |
| Approximate 50-yr Detention Volume =   | 1.887          | acre-feet |
| Approximate 100-yr Detention Volume =  | 2.404          | acre-feet |
|                                        |                |           |

#### Optional User Overrides

|      | acre-feet |
|------|-----------|
|      | acre-feet |
| 1.19 | inches    |
| 1.50 | inches    |
| 1.75 | inches    |
| 2.00 | inches    |
| 2.25 | inches    |
| 2.52 | inches    |
| 3.85 | inches    |
|      |           |


## Define Zones and Basin Geometry

| efine Zones and Basin Geometry                    |       |                 |
|---------------------------------------------------|-------|-----------------|
| Zone 1 Volume (WQCV) =                            | 0.395 | acre-feet       |
| Zone 2 Volume (EURV - Zone 1) =                   | 0.309 | acre-feet       |
| Zone 3 Volume (100-year - Zones 1 & 2) =          | 1.700 | acre-feet       |
| Total Detention Basin Volume =                    | 2.404 | acre-feet       |
| Initial Surcharge Volume (ISV) =                  | user  | ft <sup>3</sup> |
| Initial Surcharge Depth (ISD) =                   | user  | ft              |
| Total Available Detention Depth $(H_{total}) =$   | user  | ft              |
| Depth of Trickle Channel $(H_{TC}) =$             | user  | ft              |
| Slope of Trickle Channel ( $S_{TC}$ ) =           | user  | ft/ft           |
| Slopes of Main Basin Sides (S <sub>main</sub> ) = | user  | H:V             |
| Basin Length-to-Width Ratio (R <sub>L/W</sub> ) = | user  |                 |
|                                                   |       |                 |


| Initial Surcharge Area (A <sub>ISV</sub> ) =          | user | ft²             |
|-------------------------------------------------------|------|-----------------|
| Surcharge Volume Length $(L_{ISV}) =$                 | user | ft              |
| Surcharge Volume Width (W <sub>ISV</sub> ) =          | user | ft              |
| Depth of Basin Floor (H <sub>FLOOR</sub> ) =          | user | ft              |
| Length of Basin Floor $(L_{FLOOR}) =$                 | user | ft              |
| Width of Basin Floor (W <sub>FLOOR</sub> ) =          | user | ft              |
| Area of Basin Floor (A <sub>FLOOR</sub> ) =           | user | ft 2            |
| Volume of Basin Floor (V <sub>FLOOR</sub> ) =         | user | ft <sup>3</sup> |
| Depth of Main Basin (H <sub>MAIN</sub> ) =            | user | ft              |
| Length of Main Basin $(L_{MAIN}) =$                   | user | ft              |
| Width of Main Basin (W <sub>MAIN</sub> ) =            | user | ft              |
| Area of Main Basin (A <sub>MAIN</sub> ) =             | user | ft²             |
| Volume of Main Basin (V <sub>MAIN</sub> ) =           | user | ft <sup>3</sup> |
| Calculated Total Basin Volume (V <sub>total</sub> ) = | user | acre-fe         |
|                                                       |      |                 |

|                   |       | 1.             |        |       |        |             |        |         |         |
|-------------------|-------|----------------|--------|-------|--------|-------------|--------|---------|---------|
| Depth Increment = | 1.00  | ft<br>Optional |        |       |        | Optional    |        |         |         |
| Stage - Storage   | Stage | Override       | Length | Width | Area   | Override    | Area   | Volume  | Volume  |
| Description       | (ft)  | Stage (ft)     | (ft)   | (ft)  | (ft 2) | Area (ft 2) | (acre) | (ft 3)  | (ac-ft) |
| Top of Micropool  |       | 0.00           |        |       |        | 115         | 0.003  |         |         |
| 7200              |       | 0.50           |        |       |        | 115         | 0.003  | 58      | 0.001   |
| 7202              |       | 2.50           |        |       |        | 3,459       | 0.079  | 3,631   | 0.083   |
|                   |       |                |        |       |        |             |        |         |         |
| 7204              |       | 4.50           |        |       |        | 17,521      | 0.402  | 24,611  | 0.565   |
| 7206              |       | 6.50           |        |       |        | 22,243      | 0.511  | 64,375  | 1.478   |
| 7208              |       | 8.50           |        |       |        | 27,439      | 0.630  | 114,057 | 2.618   |
| 7209              |       | 9.50           |        |       |        | 30,197      | 0.693  | 142,875 | 3.280   |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   | -     |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         | -       |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   | -     |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   | -     |                |        |       |        |             |        |         |         |
|                   | -     |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   | -     |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         | -       |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        | -       | -       |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        | <br>  |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        | -     |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |
|                   |       |                |        |       |        |             |        |         |         |

118520-MHFD-Detention\_v4 03 Pond 3 REV, Basin

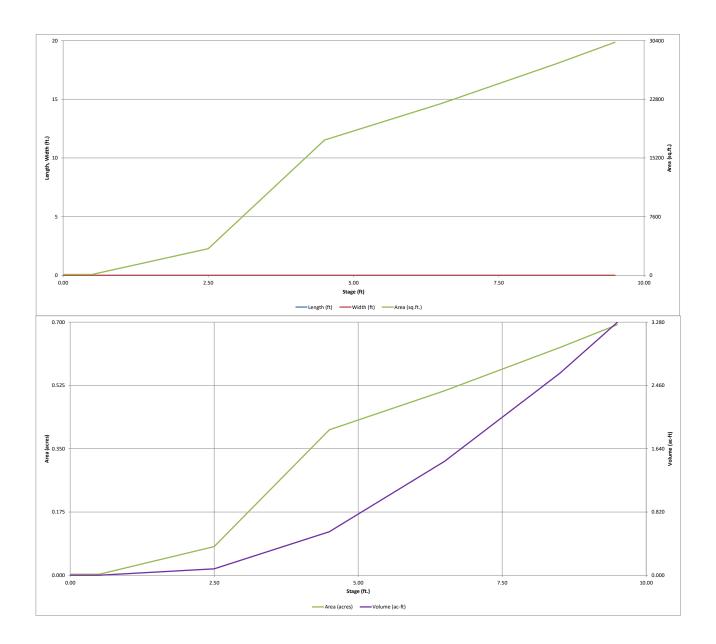

Project: RETREAT AT TIMBERRIDGE FILING NO. 2



|                  | Estimated         | Estimated      |                      |
|------------------|-------------------|----------------|----------------------|
| _                | Stage (ft)        | Volume (ac-ft) | Outlet Type          |
| Zone 1 (WQCV)    | 4.04              | 0.395          | Orifice Plate        |
| Zone 2 (EURV)    | 4.84              | 0.309          | Orifice Plate        |
| one 3 (100-year) | 8.16              | 1.700          | Weir&Pipe (Restrict) |
|                  | Total (all zones) | 2 404          |                      |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

ft (distance below the filtration media surface) Underdrain Orifice Invert Depth = N/A Underdrain Orifice Diameter = N/A inches

Calculated Parameters for Underdrain Underdrain Orifice Area N/A Underdrain Orifice Centroid = N/A feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP) Invert of Lowest Orifice = ft (relative to basin bottom at Stage = 0 ft) 0.00 Depth at top of Zone using Orifice Plate = 5.00 ft (relative to basin bottom at Stage = 0 ft)

Orifice Plate: Orifice Vertical Spacing = 20.00 inches Orifice Plate: Orifice Area per Row = inches N/A

Calculated Parameters for Plate WO Orifice Area per Row = N/A lft<sup>2</sup> Elliptical Half-Width = N/A feet Elliptical Slot Centroid = N/A feet Elliptical Slot Area = ft2 N/A

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

Row 1 (required) Row 2 (optional) Row 3 (optional) Row 4 (optional) Row 5 (optional) Row 6 (optional) Row 7 (optional) Row 8 (optional) Stage of Orifice Centroid (ft) 0.00 1.70 3.40 Orifice Area (sq. inches) 1.23 1.29 1.29

Row 9 (optional) Row 10 (optional) Row 11 (optional) Row 12 (optional) Row 13 (optional) Row 14 (optional) Row 15 (optional) Row 16 (optional) Stage of Orifice Centroid (ft) Orifice Area (sq. inches)

User Input: Vertical Orifice (Circular or Rectangular)

Not Selected Not Selected Invert of Vertical Orifice = N/A N/A ft (relative to basin bottom at Stage = 0 ft) Depth at top of Zone using Vertical Orifice = N/A N/A N/A N/A

Calculated Parameters for Vertical Orifice Not Selected Not Selected Vertical Orifice Area N/A N/A N/A

ft (relative to basin bottom at Stage = 0 ft) Vertical Orifice Centroid = N/A Vertical Orifice Diameter = inches

inches

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe) Calculated Parameters for Overflow Weir Zone 3 Weir Not Selected Zone 3 Weir Not Selected Overflow Weir Front Edge Height, Ho = 5.00 ft (relative to basin bottom at Stage = 0 ft) Height of Grate Upper Edge,  $H_t$  = N/A 6.00 N/A feet Overflow Weir Front Edge Length = 10.00 N/A feet Overflow Weir Slope Length = 4.12 N/A feet Overflow Weir Grate Slope = 4.00 N/A H:V Grate Open Area / 100-yr Orifice Area = 6.30 N/A Horiz. Length of Weir Sides = 4.00 Overflow Grate Open Area w/o Debris = ft<sup>2</sup> N/A feet 30.92 N/A Overflow Grate Open Area % = Overflow Grate Open Area w/ Debris = 75% N/A %, grate open area/total area 15.46 N/A fť Debris Clogging % =

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

50%

30.00

N/A

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate Zone 3 Restrictor Not Selected Zone 3 Restrictor 0.50 Outlet Orifice Area = N/A ft (distance below basin bottom at Stage = 0 ft) 30.00 N/A inches Outlet Orifice Centroid :

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Restrictor Plate Height Above Pipe Invert =

Depth to Invert of Outlet Pipe =

Outlet Pipe Diameter =

Spillway Invert Stage= 7.50 ft (relative to basin bottom at Stage = 0 ft) Spillway Crest Length = 35.00 feet Spillway End Slopes = 4.00 H:V Freeboard above Max Water Surface = 1.00 feet

Calculated Parameters for Spillway Spillway Design Flow Depth= 0.76 feet Stage at Top of Freeboard = 9.26 feet Basin Area at Top of Freeboard 0.68 acres Basin Volume at Top of Freeboard = 3.12 acre-ft

Half-Central Angle of Restrictor Plate on Pipe =

4.91

1.25

3.14

Routed Hydrograph Results **EURV** Design Storm Return Period = WQCV 2 Year 5 Year 10 Year 25 Year 50 Year 100 Year 500 Year One-Hour Rainfall Depth (in) = 1.50 N/A N/A 1.19 1.75 2.00 3.85 0.904 7.279 13.819 CUHP Runoff Volume (acre-ft) 0.395 0.703 1.876 2.832 4.494 5.642 Inflow Hydrograph Volume (acre-ft) : N/A N/A 0.904 1.876 2.832 13.819 CUHP Predevelopment Peak O (cfs) : N/A N/A 15.8 24.0 43.0 54.0 69.2 129.0 5.6 OPTIONAL Override Predevelopment Peak Q (cfs) = N/A N/A Predevelopment Unit Peak Flow, g (cfs/acre) : 0.74 0.93 N/A N/A 0.10 0.27 0.41 1.19 2.21 Peak Inflow Q (cfs) 20.8 29.3 48.3 59.6 135.8 10.3 N/A N/A 50.1 Peak Outflow Q (cfs) : 0.2 0.2 10.1 19.0 38. 59.6 130.8 Ratio Peak Outflow to Predevelopment Q = N/A N/A N/A 0.6 0.8 0.9 0.9 0.9 1.0 Structure Controlling Flow : Plate Plate Overflow Weir 1 erflow Weir 1 Overflow Weir 1 Overflow Weir 1 Overflow Weir 1 Outlet Plate Spillway Max Velocity through Grate 1 (fps) = N/A N/A 0.02 0.3 0.6 2.1 1.3 1.6 Max Velocity through Grate 2 (fps) = N/A N/A N/A N/A N/A N/A N/A N/A N/A Time to Drain 97% of Inflow Volume (hours) = Time to Drain 99% of Inflow Volume (hours) 41 64 62 49 59 66 59 58 56 Maximum Ponding Depth (ft) = 4.04 4.84 5.12 5.60 5.88 6.34 6.55 7.10 8.21 Area at Maximum Ponding Depth (acres) 0.33 0.48 0.50 0.42 0.44 0.46 0.61 Maximum Volume Stored (acre-ft) = 0.705 0.820 1.040 1.167 1 790 2.432

ft<sup>2</sup>

Not Selected


N/A

N/A

N/A

feet

radians

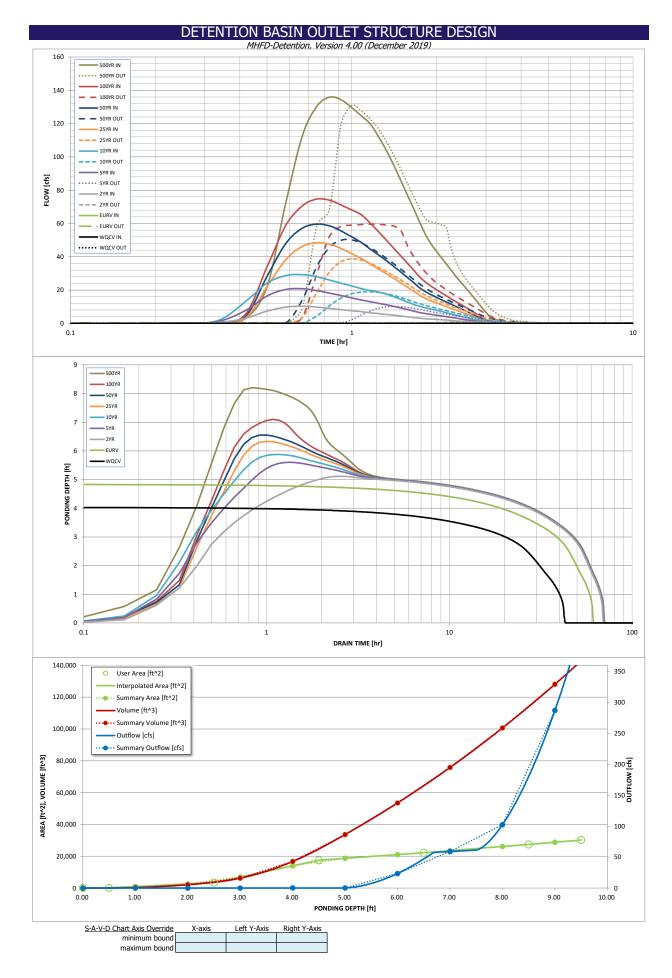

Outflow Hydrograph Workbook Filename:

#### Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

| 1             |                    |            |            |               |                |                |                | l in a separate pr |                | CLILID          |
|---------------|--------------------|------------|------------|---------------|----------------|----------------|----------------|--------------------|----------------|-----------------|
|               | SOURCE             | CUHP       | CUHP       | CUHP          | CUHP           | CUHP           | CUHP           | CUHP               | CUHP           | CUHP            |
| Time Interval | TIME               | WQCV [cfs] | EURV [cfs] | 2 Year [cfs]  | 5 Year [cfs]   | 10 Year [cfs]  | 25 Year [cfs]  | 50 Year [cfs]      | 100 Year [cfs] | 500 Year [cfs]  |
| 5.00 min      | 0:00:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 0:05:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 0:10:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.01               | 0.00           | 0.08            |
|               | 0:15:00            | 0.00       | 0.00       | 0.10          | 0.17           | 0.21           | 0.14           | 0.18               | 0.17           | 0.37            |
|               | 0:20:00            | 0.00       | 0.00       | 0.41          | 1.01           | 1.58           | 0.43           | 0.50               | 0.67           | 2.55            |
|               | 0:25:00            | 0.00       | 0.00       | 2.95          | 7.51           | 12.72          | 2.84           | 3.62               | 4.99           | 21.98           |
|               | 0:30:00<br>0:35:00 | 0.00       | 0.00       | 7.42          | 16.44          | 24.17          | 22.06          | 28.28              | 33.86          | 72.66<br>112.34 |
|               | 0:40:00            | 0.00       | 0.00       | 9.78<br>10.28 | 20.38<br>20.85 | 28.68<br>29.25 | 38.31<br>46.22 | 48.01<br>57.17     | 58.97<br>70.48 | 130.16          |
|               | 0:45:00            | 0.00       | 0.00       | 9.81          | 19.73          | 28.04          | 48.33          | 59.58              | 74.66          | 135.85          |
|               | 0:50:00            | 0.00       | 0.00       | 8.97          | 18.17          | 26.01          | 47.63          | 58.62              | 74.00          | 134.31          |
|               | 0:55:00            | 0.00       | 0.00       | 8.21          | 16.68          | 24.13          | 44.98          | 55.52              | 71.13          | 129.59          |
|               | 1:00:00            | 0.00       | 0.00       | 7.56          | 15.30          | 22.42          | 41.90          | 51.98              | 68.13          | 124.56          |
|               | 1:05:00            | 0.00       | 0.00       | 6.95          | 14.00          | 20.83          | 38.93          | 48.54              | 65.17          | 119.60          |
|               | 1:10:00            | 0.00       | 0.00       | 6.35          | 12.93          | 19.65          | 35.47          | 44.47              | 60.02          | 111.61          |
|               | 1:15:00            | 0.00       | 0.00       | 5.82          | 12.02          | 18.70          | 32.44          | 40.91              | 54.77          | 103.41          |
|               | 1:20:00            | 0.00       | 0.00       | 5.32          | 11.08          | 17.43          | 29.61          | 37.42              | 49.70          | 94.43           |
|               | 1:25:00            | 0.00       | 0.00       | 4.83          | 10.12          | 15.90          | 26.90          | 34.01              | 44.80          | 85.24           |
|               | 1:30:00<br>1:35:00 | 0.00       | 0.00       | 4.35          | 9.17           | 14.33          | 24.23          | 30.65              | 40.22          | 76.53           |
|               | 1:40:00            | 0.00       | 0.00       | 3.88          | 8.23<br>7.24   | 12.76<br>11.26 | 21.63<br>19.07 | 27.37<br>24.16     | 35.86<br>31.62 | 68.18<br>60.17  |
|               | 1:45:00            | 0.00       | 0.00       | 3.42<br>3.04  | 6.41           | 10.14          | 16.62          | 21.10              | 27.63          | 53.05           |
|               | 1:50:00            | 0.00       | 0.00       | 2.79          | 5.83           | 9.33           | 14.81          | 18.88              | 24.65          | 47.66           |
|               | 1:55:00            | 0.00       | 0.00       | 2.57          | 5.36           | 8.62           | 13.41          | 17.14              | 22.30          | 43.29           |
|               | 2:00:00            | 0.00       | 0.00       | 2.38          | 4.92           | 7.90           | 12.24          | 15.67              | 20.27          | 39.46           |
|               | 2:05:00            | 0.00       | 0.00       | 2.17          | 4.48           | 7.18           | 11.13          | 14.24              | 18.36          | 35.73           |
|               | 2:10:00            | 0.00       | 0.00       | 1.96          | 4.04           | 6.46           | 10.09          | 12.89              | 16.56          | 32.17           |
|               | 2:15:00            | 0.00       | 0.00       | 1.75          | 3.62           | 5.76           | 9.09           | 11.60              | 14.88          | 28.81           |
|               | 2:20:00            | 0.00       | 0.00       | 1.56          | 3.20           | 5.09           | 8.13           | 10.36              | 13.29          | 25.66           |
|               | 2:25:00            | 0.00       | 0.00       | 1.37          | 2.80           | 4.46           | 7.21           | 9.19               | 11.83          | 22.74           |
|               | 2:30:00            | 0.00       | 0.00       | 1.18          | 2.41           | 3.84           | 6.31           | 8.04               | 10.39          | 19.91           |
|               | 2:35:00<br>2:40:00 | 0.00       | 0.00       | 1.00          | 2.03           | 3.26           | 5.42           | 6.92               | 8.96           | 17.16           |
|               | 2:45:00            | 0.00       | 0.00       | 0.82          | 1.66<br>1.29   | 2.69<br>2.13   | 4.54<br>3.67   | 5.81<br>4.71       | 7.55<br>6.14   | 14.42<br>11.71  |
|               | 2:50:00            | 0.00       | 0.00       | 0.47          | 0.93           | 1.58           | 2.81           | 3.61               | 4.74           | 9.03            |
|               | 2:55:00            | 0.00       | 0.00       | 0.30          | 0.60           | 1.09           | 1.96           | 2.54               | 3.36           | 6.50            |
|               | 3:00:00            | 0.00       | 0.00       | 0.19          | 0.40           | 0.80           | 1.23           | 1.63               | 2.20           | 4.51            |
|               | 3:05:00            | 0.00       | 0.00       | 0.14          | 0.30           | 0.63           | 0.81           | 1.12               | 1.49           | 3.23            |
|               | 3:10:00            | 0.00       | 0.00       | 0.11          | 0.24           | 0.51           | 0.55           | 0.78               | 1.03           | 2.34            |
|               | 3:15:00            | 0.00       | 0.00       | 0.09          | 0.20           | 0.41           | 0.38           | 0.56               | 0.69           | 1.67            |
|               | 3:20:00            | 0.00       | 0.00       | 0.07          | 0.16           | 0.33           | 0.26           | 0.40               | 0.46           | 1.17            |
|               | 3:25:00            | 0.00       | 0.00       | 0.06          | 0.12           | 0.26           | 0.19           | 0.29               | 0.29           | 0.80            |
|               | 3:30:00            | 0.00       | 0.00       | 0.04          | 0.10           | 0.20           | 0.13           | 0.21               | 0.18           | 0.53            |
|               | 3:35:00            | 0.00       | 0.00       | 0.04          | 0.07           | 0.15           | 0.10           | 0.15               | 0.11           | 0.36            |
|               | 3:40:00<br>3:45:00 | 0.00       | 0.00       | 0.03          | 0.06           | 0.11           | 0.07           | 0.11               | 0.09           | 0.26            |
|               | 3:50:00            | 0.00       | 0.00       | 0.02          | 0.04           | 0.08           | 0.05<br>0.04   | 0.08               | 0.07<br>0.05   | 0.20<br>0.16    |
|               | 3:55:00            | 0.00       | 0.00       | 0.02          | 0.03           | 0.06           | 0.04           | 0.07               | 0.03           | 0.16            |
|               | 4:00:00            | 0.00       | 0.00       | 0.01          | 0.02           | 0.03           | 0.02           | 0.03               | 0.03           | 0.09            |
|               | 4:05:00            | 0.00       | 0.00       | 0.01          | 0.01           | 0.02           | 0.02           | 0.03               | 0.02           | 0.06            |
|               | 4:10:00            | 0.00       | 0.00       | 0.00          | 0.01           | 0.01           | 0.01           | 0.02               | 0.01           | 0.04            |
|               | 4:15:00<br>4:20:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.01           | 0.01           | 0.01               | 0.01           | 0.02            |
|               | 4:20:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.01            |
|               | 4:30:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 4:35:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 4:40:00<br>4:45:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 4:45:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 4:55:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:00:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:05:00<br>5:10:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:15:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:20:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:25:00<br>5:30:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:35:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:40:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:45:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 5:50:00<br>5:55:00 | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               | 6:00:00            | 0.00       | 0.00       | 0.00          | 0.00           | 0.00           | 0.00           | 0.00               | 0.00           | 0.00            |
|               |                    |            |            |               |                |                |                |                    |                |                 |

MHFD-Detention, Version 4.03 (May 2020)

Summary Stage-Area-Volume-Discharge Relationships

The user can create a summary S-A-V-D by entering the desired stage increments and the remainder of the table will populate automatically. The user should graphically compare the summary S-A-V-D table to the full S-A-V-D table in the chart to confirm it captures all key transition points.

| Description         [ft]         [ft^2]         [acres]         [ft^3]         [ac-ft]         [cfs]           0.00         115         0.003         0         0.000         0.00           1.00         951         0.022         324         0.007         0.04           2.00         2,623         0.060         2,111         0.048         0.08           3.00         6,974         0.160         6,240         0.143         0.12           4.00         14,005         0.322         16,730         0.384         0.18           5.00         18,701         0.429         33,667         0.773         0.22           6.00         21,062         0.484         53,549         1.229         23.55           7.00         23,542         0.540         75,822         1.741         59.09 | Stage - Storage | Stage | Area   | Area    | Volume             | Volume  | Total<br>Outflow |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------|--------|---------|--------------------|---------|------------------|-----------|
| 0.00         115         0.003         0         0.000         0.00           1.00         951         0.022         324         0.007         0.04           2.00         2,623         0.060         2,111         0.048         0.08           3.00         6,974         0.160         6,240         0.143         0.12           4.00         14,005         0.322         16,730         0.384         0.18           5.00         18,701         0.429         33,667         0.773         0.22           6.00         21,062         0.484         53,549         1.229         23.55           7.00         23,542         0.540         75,822         1.741         59.09           8.00         26,140         0.600         100,663         2.311         102.46                       | Description     | [ft]  | [ft²]  | [acres] | [ft <sup>3</sup> ] | [ac-ft] |                  |           |
| 1.00 951 0.022 324 0.007 0.04  2.00 2,623 0.060 2,111 0.048 0.08  3.00 6,974 0.160 6,240 0.143 0.12  4.00 14,005 0.322 16,730 0.384 0.18  5.00 18,701 0.429 33,667 0.773 0.22  6.00 21,062 0.484 53,549 1.229 23.55  7.00 23,542 0.540 75,822 1.741 59.09  8.00 26,140 0.600 100,663 2.311 102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |       |        | 0.003   |                    |         |                  | F         |
| 2.00 2,623 0.060 2,111 0.048 0.08 3.00 6,974 0.160 6,240 0.143 0.12 4.00 14,005 0.322 16,730 0.384 0.18 5.00 18,701 0.429 33,667 0.773 0.22 6.00 21,062 0.484 53,549 1.229 23.55 7.00 23,542 0.540 75,822 1.741 59.09 8.00 26,140 0.600 100,663 2.311 102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                 |       |        |         | -                  |         |                  | - 's      |
| 3.00     6,974     0.160     6,240     0.143     0.12       4.00     14,005     0.322     16,730     0.384     0.18       5.00     18,701     0.429     33,667     0.773     0.22       6.00     21,062     0.484     53,549     1.229     23.55       7.00     23,542     0.540     75,822     1.741     59.09       8.00     26,140     0.600     100,663     2.311     102.46                                                                                                                                                                                                                                                                                                                                                                                                                     |                 |       |        |         | -                  |         |                  | -         |
| 4.00     14,005     0.322     16,730     0.384     0.18       5.00     18,701     0.429     33,667     0.773     0.22       6.00     21,062     0.484     53,549     1.229     23.55       7.00     23,542     0.540     75,822     1.741     59.09       8.00     26,140     0.600     100,663     2.311     102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                 |       |        |         | l                  |         |                  | - f       |
| 5.00     18,701     0.429     33,667     0.773     0.22       6.00     21,062     0.484     53,549     1.229     23.55       7.00     23,542     0.540     75,822     1.741     59.09       8.00     26,140     0.600     100,663     2.311     102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |       |        |         |                    |         |                  | - 5       |
| 6.00     21,062     0.484     53,549     1.229     23.55       7.00     23,542     0.540     75,822     1.741     59.09       8.00     26,140     0.600     100,663     2.311     102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |       |        |         |                    |         |                  | 7         |
| 7.00     23,542     0.540     75,822     1.741     59.09       8.00     26,140     0.600     100,663     2.311     102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 |       |        |         |                    |         | 1                | -         |
| 8.00 26,140 0.600 100,663 2.311 102.46                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |       |        | 0.540   |                    | 1.741   | 59.09            | 7         |
| 9.00 28,818 0.662 128,122 2.941 287.24                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 | 8.00  | 26,140 | 0.600   | 100,663            | 2.311   | 102.46           |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 | 9.00  | 28,818 | 0.662   | 128,122            | 2.941   | 287.24           | $\bot$    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 1         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\forall$ |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 7         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ]         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | _         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | _[        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\rfloor$ |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ┪         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ┪         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 7         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ٦         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | _         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | +         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | +         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 1         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ]         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | +         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 1         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ]         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 1         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | +         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 1         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | _]        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 4         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | $\dashv$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | 7         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ]         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |       |        |         |                    |         |                  | ┙         |

For best results, include the stages of all grade slope changes (e.g. ISV and Floor) from the S-A-V table on Sheet 'Basin'.

Also include the inverts of all outlets (e.g. vertical orifice, overflow grate, and spillway, where applicable).

Figure 13-12c. Emergency Spillway Protection


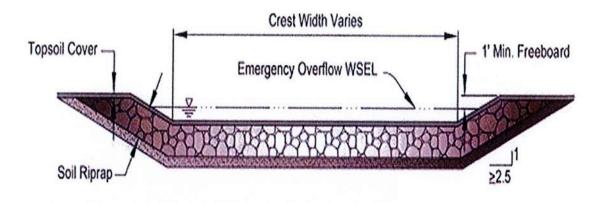


Figure 13-12d. Riprap Types for Emergency Spillway Protection

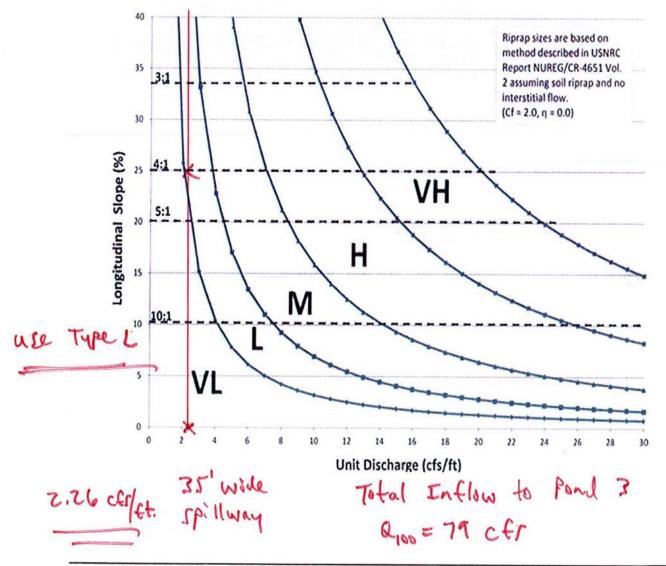


Compute by: Known Q (cfs)

Hydraflow Express Extension for Autodesk® AutoCAD® Civil 3D® by Autodesk, Inc.

= 59.60

## Pond 3 Outlet Pipe - 30 in. RCP

| Circular         |           | Highlighted         |         |
|------------------|-----------|---------------------|---------|
| Diameter (ft)    | = 2.50    | Depth (ft)          | = 2.29  |
|                  |           | Q (cfs)             | = 59.60 |
|                  |           | Area (sqft)         | = 4.71  |
| Invert Elev (ft) | = 7199.00 | Velocity (ft/s)     | = 12.65 |
| Slope (%)        | = 1.84    | Wetted Perim (ft)   | = 6.39  |
| N-Value          | = 0.013   | Crit Depth, Yc (ft) | = 2.40  |
|                  |           | Top Width (ft)      | = 1.38  |
| Calculations     |           | EGL (ft)            | = 4.78  |
| Compute by:      | Known Q   |                     |         |
| 16 0 ( 6 )       |           |                     |         |

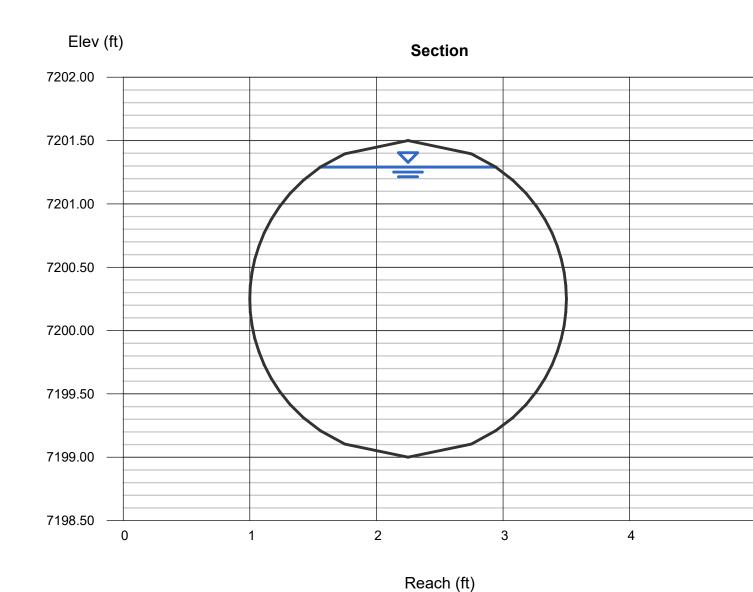

Chapter 9 Hydraulic Structures

## Sizing for Plunge Pool at Pond 3 Outlet Pipe

#### 3.2.2 Low Tailwater Basin

The design of low tailwater riprap basins is necessary when the receiving channel may have little or no flow or tailwater at time when the pipe or culvert is in operation. Figure 9-37 provides a plan and profile view of a typical low tailwater riprap basin.

By providing a low tailwater basin at the end of a storm drain conduit or culvert, the kinetic energy of the discharge dissipates under controlled conditions without causing scour at the channel bottom.

Low tailwater is defined as being equal to or less than ½ of the height of the storm drain, that is:

$$y_t \le \frac{D}{3}$$
 or  $y_t \le \frac{H}{3}$ 

Where:

 $y_t$  = tailwater depth at design flow (feet)

D = diameter of circular pipe (feet)

H = height of rectangular pipe (feet)

#### **Rock Size**

The procedure for determining the required riprap size downstream of a conduit outlet is in Section 3.2.3.

After selecting the riprap size, the minimum thickness of the riprap layer, *T*, in feet, in the basin is defined as:

$$T = 2D_{50}$$
 Equation 9-15

#### **Basin Geometry**


Figure 9-37 includes a layout of a standard low tailwater riprap basin with the geometry parameters provided. The minimum length of the basin (L) and the width of the bottom of the basin (W1) are provided in a table at the bottom of Figure 9-37. All slopes in the low tailwater basin shall be 3(H):1(V), minimum.


#### **Other Design Requirements**

Extend riprap up the outlet embankment slope to the mid-pipe level, minimum. It is recommended that riprap that extends more than 1 foot above the outlet pipe invert be installed 6 inches below finished grade and buried with topsoil.

Provide pipe end treatment in the form of a pipe headwall or a flared-end section headwall. See Section 3.1 for options.

Hydraulic Structures Chapter 9

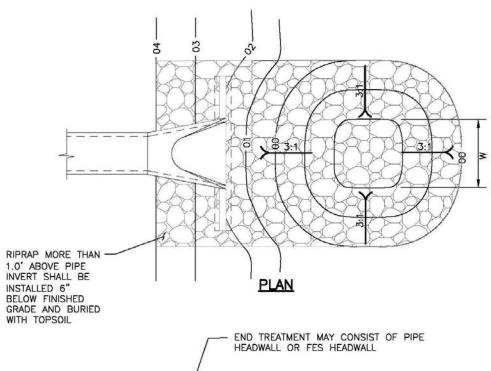

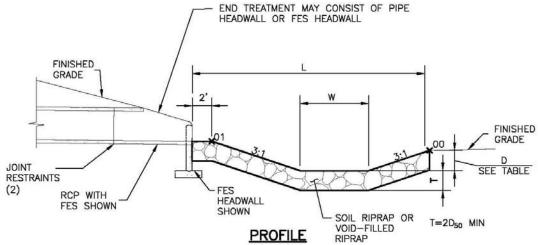

Pond 3 Outlet Pipe 30" RCP

| PIPE SIZE OR<br>BOX HEIGHT | D     | <u>w*</u> | L   |
|----------------------------|-------|-----------|-----|
| 18" - 24"                  | 1'-0" | 4'        | 15' |
| 30" - 36"                  | 1'-6" | 6'        | 20' |
| 42" - 48"                  | 2'-0" | 7'        | 24' |
| 54" - 60"                  | 2'-6" | 8'        | 28' |
| 66" - 72"                  | 3'-0" | 9'        | 32' |

\* IF OUTLET PIPE IS A BOX CULVERT WITH A WIDTH GREATER THAN W, THEN W = CULVERT WIDTH

Plunge Pool dimensions:

D=Depth=18" w=6' L=length of basin=20'

Figure 9-37. Low tailwater riprap basin

Chapter 9 Hydraulic Structures

## Rip-Rap sizing for Plunge Pool at Pond 3 Outlet Pipe

#### 3.2.3 Rock Sizing for Riprap Apron and Low Tailwater Basin

Scour resulting from highly turbulent, rapidly decelerating flow is a common problem at conduit outlets. The following section summarizes the method for sizing riprap protection for both riprap aprons (Section 3.2.1) and low tailwater basins (Section 3.2.2).

Use Figure 9-38 to determine the required rock size for circular conduits and Figure 9-39 for rectangular conduits. Figure 9-38 is valid for  $Q/D_c^{2.5}$  of 6.0 or less and Figure 9-39 is valid for  $Q/WH^{1.5}$  of 8.0 or less. The parameters in these two figures are:

- 1.  $Q/D^{1.5}$  or  $Q/WH^{0.5}$  in which Q is the design discharge in cfs,  $D_c$  is the diameter of a circular conduit in feet, and W and H are the width and height of a rectangular conduit in feet.
- 2.  $Y_t/D_c$  or  $Y_t/H$  in which  $Y_t$  is the tailwater depth in feet,  $D_c$  is the diameter of a circular conduit in feet, and H is the height of a rectangular conduit in feet. In cases where  $Y_t$  is unknown or a hydraulic jump is suspected downstream of the outlet, use  $Y_t/D_t = Y_t/H = 0.40$  when using Figures 9-38 and 9-39.
- 3. The riprap size requirements in Figures 9-38 and 9-39 are based on the non-dimensional parametric Equations 9-16 and 9-17 (Steven, Simons, and Watts 1971 and Smith 1975).

Circular culvert:

$$d_{50} = \frac{0.023Q}{Y_t^{1.2} D_c^{0.3}}$$
 Equation 9-16

Rectangular culvert:

$$d_{50} = \frac{0.014H^{0.5}Q}{Y.W}$$
 Equation 9-17

These rock size requirements assume that the flow in the culvert is subcritical. It is possible to use Equations 9-16 and 9-17 when the flow in the culvert is supercritical (and less than full) if the value of  $D_c$  or H is modified for use in Figures 9-38 and 9-39. Note that rock sizes referenced in these figures are defined in the *Open Channels* chapter. Whenever the flow is supercritical in the culvert, substitute  $D_a$  for  $D_c$  and  $H_a$  for H, in which  $D_a$  is defined as:

$$D_a = \frac{\left(D_c + Y_n\right)}{2}$$
 Equation 9-18

Where the maximum value of  $D_a$  shall not exceed  $D_c$ , and

Hydraulic Structures Chapter 9

$$H_a = \frac{\left(H + Y_n\right)}{2}$$
 Equation 9-19

Where the maximum value of  $H_a$  shall not exceed H, and:


 $D_a$  = parameter to use in place of D in Figure 9-38 when flow is supercritical (ft)

 $D_c$  = diameter of circular culvert (ft)

 $H_a$  = parameter to use in place of H in Figure 9-39 when flow is supercritical (ft)

H = height of rectangular culvert (ft)

 $Y_n$  = normal depth of supercritical flow in the culvert (ft)

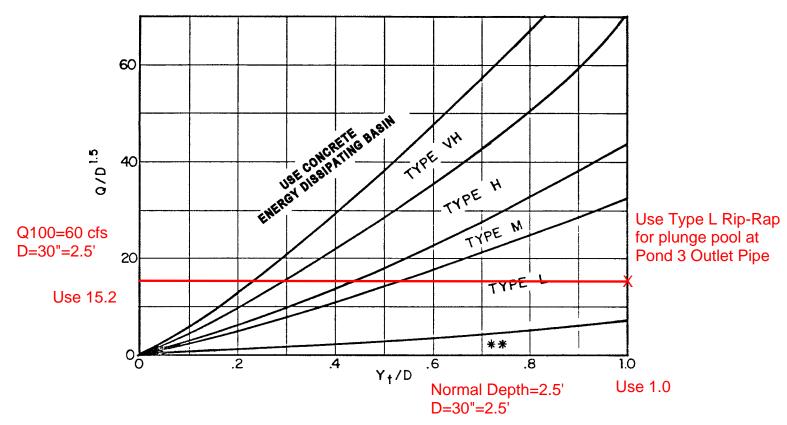


Use  $D_a$  instead of D whenever flow is supercritical in the barrel. \*\*Use Type L for a distance of 3D downstream.

Rip-Rap sizing for Plunge Pool at Pond 3 Outlet Pipe

Figure 9-38. Riprap erosion protection at circular conduit outlet (valid for Q/D2.5  $\leq$  6.0)

Hydraulic Structures Chapter 9

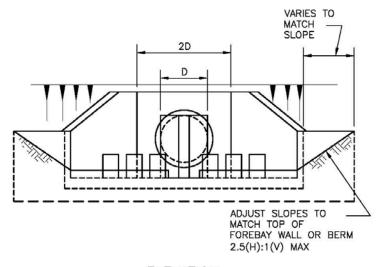

## **ELEVATION**



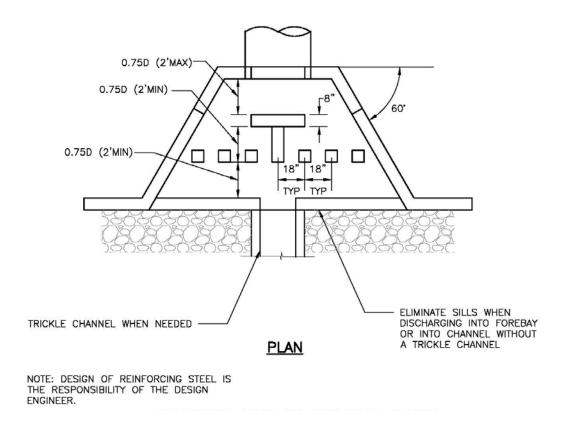


Figure 9-43. Modified impact stilling basin for conduits 18" to 48" in diameter (Part 1 of 2)

Chapter 9 Hydraulic Structures

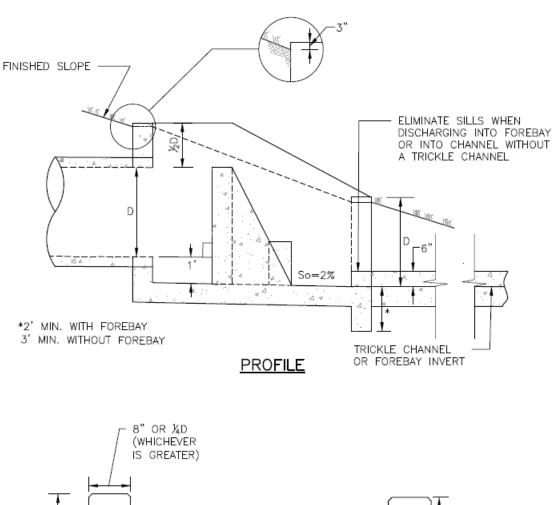

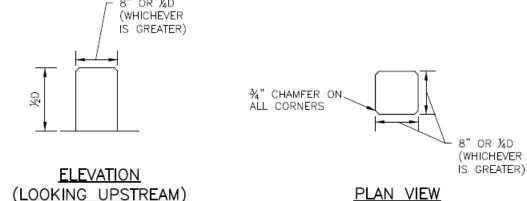

## BAFFLE BLOCK GEOMETRY

Figure 9-44. Modified impact stilling basin for conduits 18" to 48" in diameter (Part 2 of 2)

**HEC-RAS CALCULATIONS** 



CHECKED BY

(V) 1"= N/A JOB NO. 1185.20



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (AT ARROYA LN.)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (SOUTH OF ARROYA LN.)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 25+00)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 21+25)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 19+00)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 15+75)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 12+00)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 10+00)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 6+75)



SAND CREEK REACH 9 - LOOKING DOWNSTREAM (HEC-RAS STA: 4+00)

TABLE 10-1

# COMPOSITE ROUGHNESS COEFFICIENTS FOR UNLINED OPEN CHANNELS (Reference: Chow, Ven Te, 1959; Open-Channel Hydraulics)

$$n = (n_0 + n_1 + n_2 + n_3 + n_4)m$$
 (10-2)

|                                                         | Channel Conditions                                      | Value                                                            |
|---------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------|
| Material Type  n o                                      | Earth<br>Fine Gravel<br>Coarse Gravel                   | 0.020<br>0.024<br>0.028                                          |
| Degree of Irregularity  n 1                             | Smooth<br>Minor<br>Moderate<br>Severe                   | 0.000<br>0.005<br>0.010<br>0.020                                 |
| Variation of Channel<br>Cross Section<br><sup>n</sup> 2 | Gradual Alternating Occasionally Alternating Frequently | 0.000<br>0.005<br>0.010 - 0.015                                  |
| Relative Effect<br>of Obstructions<br>n <sub>3</sub>    | Negligible<br>Minor<br>Appreciable<br>Severe            | 0.000<br>0.010 - 0.015<br>0.020 - 0.030<br>0.040 - 0.060         |
| Vegetation n <sub>4</sub>                               | Low<br>Medium<br>High<br>Very High                      | 0.005 - 0.010<br>0.010 - 0.025<br>0.025 - 0.050<br>0.050 - 0.100 |
| Degree of Meandering m                                  | Minor<br>Appreciable<br>Severe                          | 1.000 - 1.200<br>1.200 - 1.500<br>1.500                          |

## TRBLE 10-2 (Continued)

## TYPICAL ROUGHNESS COEFFICIENTS FOR OPEN CHANNELS

| Type  | of Channel and Description                                                                | Minimum | Normal | Maximum |
|-------|-------------------------------------------------------------------------------------------|---------|--------|---------|
| NATUE | RAL STREAMS                                                                               |         |        |         |
|       | streams (top width at flood 100 ft)                                                       |         |        |         |
| а.    | Streams on plain                                                                          |         |        |         |
| a.    | 1. Clean, straight, full stage, no rifts or deep pools                                    | 0.025   | 0.030  | 0.033   |
|       | 2. Same as above, but more stones and weeds                                               | 0.030   | 0.035  | 0.040   |
|       | 3. Clean, winding, some pools and shoals                                                  | 0.033   | 0.040  | 0.045   |
|       | 4. Same as above, but some weeds and stones                                               | 0.035   | 0.045  | 0.050   |
|       | 5. Same as above, lower stages, more ineffective slopes and sections                      | 0.040   | 0.048  | 0.055   |
|       | 6. Same as 4, but more stones                                                             | 0.045   | 0.050  | 0.060   |
|       | 7. Sluggish reaches, weedy, deep pools                                                    | 0.050   | 0.070  |         |
|       | 8. Very weedy reaches, deep pools, or floodways with heavy stand of timber and underbrush | 0.075   | 0.100  | 0.150   |
| LINED | OR BUILT-UP CHANNELS                                                                      |         |        |         |
| a.    | Corrugated Metal                                                                          | 0.021   | 0.025  | 0.030   |
| b.    | Concrete                                                                                  |         |        |         |
|       | 1. Trowel finish                                                                          | 0.011   | 0.013  | 0.015   |
|       | 2. Float finish                                                                           | 0.013   | 0.015  | 0.016   |
|       | 3. Finished, with gravel on bottom                                                        |         | በ በ17  | 0.020   |
|       | 4. Unfinished                                                                             | 0.014   | 0.017  | 0.020   |
|       | 5. Gunite, good section                                                                   | 0.016   |        |         |
|       | 6. Gunite, wavy section                                                                   | 0.018   | 0.022  | 0.025   |
|       | 7. On good excavated rock                                                                 | 0.017   | 0.020  |         |
|       | 8. On irregular excavated rock                                                            | 0.022   | 0.027  |         |

**Table 3.** Adjustment values for factors that affect roughness of flood plains [Modified from Aldridge and Garrett, 1973, table 2]

| Flood-plain co                                                    | onditions            | n value adjustment         | Example                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------|----------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10752                                                             | Smooth               | 0.000                      | Compares to the smoothest, flattest flood plain attainable in a given bed material.                                                                                                                                                                                                                                                                                                                          |
| Degree of                                                         | Minor                | 0.001-0.005                | Is a flood plain slightly irregular in shape. A few rises and dips or sloughs may be visible on the flood plain.                                                                                                                                                                                                                                                                                             |
| irregularity $(n_1)$                                              | Moderate<br>Severe   | 0.006-0.010<br>0.011-0.020 | Has more rises and dips. Sloughs and hummocks may occur.  Flood plain very irregular in shape. Many rises and dips or sloughs are visible.  Irregular ground surfaces in pastureland and furrows perpendicular to the flow are also included.                                                                                                                                                                |
| Variation of<br>flood-plain<br>cross section<br>(n <sub>2</sub> ) | ,                    | 0.0                        | Not applicable.                                                                                                                                                                                                                                                                                                                                                                                              |
| Effect of obstructions                                            | Negligible           | 0.000-0.004                | Few scattered obstructions, which include debris deposits, stumps, exposed roots, logs, or isolated boulders, occupy less than 5 percent of the cross-sectional area.                                                                                                                                                                                                                                        |
| $(n_3)$                                                           | Minor<br>Appreciable | 0.005-0.019<br>0.020-0.030 | Obstructions occupy less than 15 percent of the cross-sectional area.  Obstructions occupy from 15 to 50 percent of the cross-sectional area.                                                                                                                                                                                                                                                                |
|                                                                   | Small                | 0.001-0.010                | Dense growth of flexible turf grass, such as Bermuda, or weeds growing where the average depth of flow is at least two times the height of the vegetation, or supple tree seedlings such as willow, cottonwood, arrowweed, or saltcedar growing where the average depth of flow is at least three times the height of the vegetation.                                                                        |
|                                                                   | Medium               | 0.011-0.025                | Turf grass growing where the average depth of flow is from one to two times the height of the vegetation, or moderately dense stemmy grass, weeds, or tree seedlings growing where the average depth of flow is from two to three times the height of the vegetation; brushy, moderately dense vegetation, similar to 1- to 2-year-old willow trees in the dormant season.                                   |
| Amount of vegetation $(n_4)$                                      | Large                | 0.025-0.050                | Turf grass growing where the average depth of flow is about equal to the height of the vegetation, or 8- to 10-year-old willow or cottonwood trees intergrown with some weeds and brush (none of the vegetation in foliage) where the hydraulic radius exceeds 2 ft, or mature row crops such as small vegetables, or mature field crops where depth of flow is at least twice the height of the vegetation. |
|                                                                   | Very large           | 0.050-0.100                | Turf grass growing where the average depth of flow is less than half the height of the vegetation, or moderate to dense brush, or heavy stand of timber with few down trees and little undergrowth where depth of flow is below branches, or mature field crops where depth of flow is less than the height of the vegetation.                                                                               |
|                                                                   | Extreme              | 0.100-0.200                | Dense bushy willow, mesquite, and saltcedar (all vegetation in full foliage), or heavy stand of timber, few down trees, depth of flow reaching branches.                                                                                                                                                                                                                                                     |
| Degree of<br>meander (m)                                          | V                    | 1.0                        | Not applicable.                                                                                                                                                                                                                                                                                                                                                                                              |

Chow (1959) presents a table showing minimum, normal, and maximum values of n for flood plains covered by pasture and crops. These values are helpful for comparing the roughness values of flood plains having similar vegetation.

## Vegetation-Density Method

For a wooded flood plain, the vegetation-density method can be used as an alternative to the previous method for determining *n* values for flood plains. In a wooded flood plain, where the tree diameters can be measured, the vegetation density of the flood plain can be determined.

Determining the vegetation density is an effective way of relating plant height and density characteristics, as a function of depth of flow, to the flow resistance of vegetation. Application of the flow-resistance model presented below requires an estimate of the vegetation density as a function of depth of flow. The procedure requires a direct or indirect determination of vegetation density at a given depth. If the change in n value through a range in depth is required, then an estimation of vegetation density through that range is necessary.

#### **Techniques for Determining Vegetation Density**

Petryk and Bosmajian (1975) developed a method of analysis of the vegetation density to determine the rough**Classification of Vegetal Covers** 

| Retardance<br>Class                   | Cover                                                                                                 | Condition                                                |
|---------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| A                                     | Weeping lovegrass                                                                                     | Excellent stand, tall, average 30 in.                    |
| A                                     | Yellow bluestem Ischaemum                                                                             | Excellent stand, tall, average 36 in.                    |
| · · · · · · · · · · · · · · · · · · · | Bermuda grass                                                                                         | Good stand, tall, average 12 in.                         |
|                                       | Native grass mixture (little bluestem, bluestem, blue gamma, and other long and short Midwest grasses | Good stand, unmowed                                      |
|                                       | Weeping lovegrass                                                                                     | Good stand, tall, average 24 in.                         |
| В                                     | Lespedeza serica                                                                                      | Good stand, not woody, tall, average 19 in.              |
|                                       | Alfalfa                                                                                               | Good stand uncut, average 11 in.                         |
|                                       | Weeping lovegrass                                                                                     | Good stand, unmowed, average 13 in.                      |
|                                       | Kudzu                                                                                                 | Dense growth, uncut                                      |
|                                       | Blue gamma                                                                                            | Good stand, uncut, average 13 in.                        |
|                                       | Crabgrass                                                                                             | Fair stand, uncut, avg. 10 in.                           |
|                                       | Bermuda grass                                                                                         | Good stand, mowed, average 6 in.                         |
|                                       | Common lespedeza                                                                                      | Good stand, uncut, average 11 in.                        |
| С                                     | Grass-legume mixture - summer (orchard grass, redtop Italian ryegrass, and common lespedeza)          | Good stand, uncut, average 6 to 8 in.                    |
|                                       | Centipedegrass                                                                                        | Very dense cover, average 6 in.                          |
|                                       | Kentucky Bluegrass                                                                                    | Good stand, headed, 6 to 12 in.                          |
|                                       | Bermuda grass                                                                                         | Good stand, cut to 2.5 in. height                        |
|                                       | Common lespedeza                                                                                      | Excellent stand, uncut, average 4.5 in.                  |
|                                       | Buffalo Grass                                                                                         | Good stand, uncut, 3 t 6 in.                             |
| D                                     | Grass-legume mixture - fall (orchard grass, redtop Italian ryegrass, and common lespedeza)            | Good stand, uncut, 3 to 5 in.                            |
|                                       | Lespedeza serica                                                                                      | After cutting to 2 in. height, good stand before cutting |
|                                       | Bermuda grass                                                                                         | Good stand, cut to average 1.5 in. height                |
| E                                     | Bermuda grass                                                                                         | Burned stubble                                           |
| Note: Covers cla<br>uniform.          | ssified have been tested in experimental char                                                         | nnels. Covers were green and generally                   |
| Source: HEC-15                        |                                                                                                       |                                                          |



## Coefficients for Roughness of Grass-Lined Channels

| SCS<br>Retardance<br>Class | $C_{n}$ |
|----------------------------|---------|
| A                          | 0.605   |
| В                          | 0.418   |
| С                          | 0.220   |
| D                          | 0.147   |
| E                          | 0.093   |

#### **Composite Roughness**

Culverts using different materials for portions of the perimeter such as embedded culverts or culverts with an invert liner should use a composite Manning's n value. A weighted n value based on the materials can be derived using the following equation:

$$n_c = \left[rac{\Sigma(p_i n_i^{1.5})}{p}
ight]^{0.67}$$

Where:

 $n_c$  = Composite/weighted Manning's n.

 $p_i$  = Wetted perimeter for the material, ft.

 $n_i$  = Manning's n value for the material.

p = Total wetted perimeter, ft.

## 750.1.4.1.2 Hydraulic Radius

The hydraulic radius is a characteristic depth of flow and is defined as the cross-sectional area of flow divided by the wetted perimeter of the channel. The hydraulic radius is computed as follows:

$$R = \frac{A}{P}$$

where:

R = hydraulic radius, ft

 $A = cross-sectional area of flow, ft^2$ 

P = wetted perimeter of the channel cross section, ft

## 750.1.4.1.3 Slope

Table 8–8 Characteristics of selected grass species for use in channels and waterways

| 0                      | Height at maturity |           |  |
|------------------------|--------------------|-----------|--|
| Grass species          | (ft)               | (m)       |  |
| Cool-season grasses    |                    |           |  |
| Creeping foxtail       | 3–4                | 0.9-1.2   |  |
| Crested wheatgrass     | 2–3                | 0.6-0.9   |  |
| Green needlegrass      | 3-4                | 0.9-1.2   |  |
| Russian wild rye       | 3–4                | 0.9-1.2   |  |
| Smooth bromegrass      | 3–4                | 0.9-1.2   |  |
| Tall fescue            | 3-4                | 0.9-1.2   |  |
| Tall wheatgrass        |                    | 1.2-1.5   |  |
| Western wheatgrass     | 2–3                | 0.6-0.9   |  |
| Warm-season grasses    | •                  |           |  |
| Bermudagrass           | 3/42               | 0.2-0.6   |  |
| Big bluestem           | 4-6                | 1.2-1.8   |  |
| Blue grama             | 1–2                | 0.3-0.6   |  |
| Buffalograss           | 1/3-1              | 0.1-0.3   |  |
| Green spangletop       | 3–4                | 0.9-1.2   |  |
| Indiangrass            | 5–6                | 1.5-1.8   |  |
| Klein grass            | 3-4                | 0.9-1.2   |  |
| Little bluestem        | 3-4                | 0.9-1.2   |  |
| Plains bristlegrass    | 1–2                | 0.3-0.6   |  |
| Sand bluestem          | 56                 | 1.5-1.8   |  |
| Sideoats grama         | 2–3                | 0.6-0.9   |  |
| Switchgrass            | 4–5                | 1.2-1.5   |  |
| Vine mesquitegrass     | 1–2                | 0.3-0.6   |  |
| Weeping lovegrass      | 3–4                | 0.9-1.2   |  |
| Old World bluestems    |                    |           |  |
| Caucasian bluestem     | 4–5                | 1.2-1.5   |  |
| Ganada yellow bluestem | 3-4                | 0.9 - 1.2 |  |



Table 8–9 Retardance curve index by SCS retardance class

| SCS retardance class | Retardance curve<br>index |
|----------------------|---------------------------|
| A                    | 10.0                      |
| В                    | 7.64                      |
| C                    | 5.60                      |
| D                    | 4.44                      |
| E                    | 2.88                      |

this table were obtained from a review of the available qualitative descriptions and stem counts reported by researchers studying channel resistance and stability.

Since cover conditions vary from year to year and season to season, it is recommended that an upper and lower bound be determined for  $C_\Gamma$ . The lower bound should be used in stability computations, and the upper bound should be used to determine channel capacity. Some practitioners find that the use of SCS retardance class (table 8–9) is a preferable approach.

The vegetal cover index, C<sub>F</sub>, depends primarily on the density and uniformity of density in the immediate vicinity of the soil boundary. Because this parameter is associated with the prevention of local erosion damage which may lead to channel unraveling, the cover factor should represent the weakest area in a reach, rather than the average for the cover species. Recommended values for the cover factor are presented in table 8–10. Values in this table do not account for such considerations as maintenance practices or uniformity of soil fertility or moisture. Therefore, appropriate engineering judgment should be used in its application.

**Table 8–10** Properties of grass channel linings values (apply to good uniform stands of each cover)

| Cover factor (C <sub>F</sub> ) | Covers tested                        | Reference<br>stem<br>density<br>(stems/ft²) | Reference<br>stem<br>density<br>(stems/m²) |
|--------------------------------|--------------------------------------|---------------------------------------------|--------------------------------------------|
| 0.90                           | Bermudagrass                         | 500                                         | 5,380                                      |
|                                | Centipede grass                      | 500                                         | 5,380                                      |
| 0.87                           | Buffalograss                         | 400                                         | 4,300                                      |
|                                | Kentucky bluegrass                   | 350                                         | 3,770                                      |
|                                | Blue grama                           | 350                                         | 3,770                                      |
| 0.75                           | Grass mixture                        | 200                                         | 2,150                                      |
| 0.50                           | Weeping lovegrass<br>Yellow bluestem | $\frac{350}{250}$                           | 3,770<br>2,690                             |
| 0.50                           | Alfalfa                              | 500                                         | 5,380                                      |
|                                | Lespedeza sericea                    | 300                                         | 3,280                                      |
| 0.50                           | Common lespedeza                     | 150                                         | 1,610                                      |
|                                | Sudangrass                           | 50                                          | 538                                        |

Multiply the stem densities given by 1/3, 2/3, 1, 4/3, and 5/3 for poor, fair, good, very good, and excellent covers, respectively. Reduce the  $\rm C_p$  by 20% for fair stands and 50% for poor stands.

Two soil parameters are required for application of effective stress concepts to the stability design of lined or unlined channels having an erodible soil boundary: soil grain roughness,  $n_{\rm s}$ , and allowable effective stress,  $\tau_{\rm a}$ . When the effective stress approach is used, the soil parameters are the same for both lined and unlined channels with negligible bed-material sediment transport.

Soil grain roughness is defined as the roughness associated with particles or aggregates of a size that can be independently moved by the flow at incipient channel failure. For noncohesive soils, the soil grain roughness and effective shear stress are both a function of the  $D_{75}$  grain size. When  $D_{75}$  is greater than 1.3 millimeter, the soil is considered coarse grained. When  $D_{75}$  is less than 1.3 millimeter, the soil is considered fine grained. Fine-grained roughness is considered to have a constant value of 0.0156. Fine-grained effective shear stress is taken to have a constant value of 0.02 pound per square foot. Coarse-grained shear stress and roughness are given in figures 8–21 and 8–22.

A soil grain roughness of 0.0156 is assigned to all cohesive soils. The allowable effective stresses are a function of the unified soil classification system soil type, the plasticity index, and the void ratio. The basic allowable shear stress,  $\tau_{ab}$ , is determined from the plasticity index and soil classification, and then adjusted by the void ratio correction factor,  $C_{\rm e}$ , using the following equation:

$$\tau_a = \tau_{ab} C_e^2$$
 (eq. 8–29)

The basic allowable effective stress can be determined from figure 8–23 and the void ratio correction factor from figure 8–24. These two figures were developed directly from the allowable velocity curves in AH 667. Stress partitioning (slope partitioning) is essential to application of figures 8–21 to 8–24, with or without vegetation (Temple et al. 1987).

## (e) General design procedure

Use the basic shear stress equation to determine effective shear stress on the soil beneath the vegetation. Use any consistent units of measurement.

$$\tau_e = \gamma dS (1 - C_F) \left(\frac{n_s}{n}\right)^2$$
 (eq. 8–30)

#### where:

τ<sub>e</sub> = effective shear stress exerted on the soil beneath vegetation (lb/ft² or N/m²)

 $\gamma$  = specific weight of water (lb/ft<sup>3</sup> or N/m<sup>3</sup>)

S = energy slope, dimensionless

C<sub>F</sub> = vegetation cover factor (0 for unlined channel), dimensionless

 $n_s$  = grain roughness of underlying soil, typically taken as dimensionless

n = roughness coefficient of vegetation, typically taken as dimensionless

The flow depth is used instead of the hydraulic radius because this will result in the maximum local shear stress, rather than the average shear stress. The cover factor is a function of the grass and stem density. Roughness coefficients are standard Manning's roughness values;  $n_{\rm s}$  can be determined from figure 8–22, n can be determined from the old SCS curves (fig. 8–20) or from the following equation.

$$n_{_{\rm R}} = \exp \left\{ C_{_{\rm I}} \left[ \, 0.0133 \left( \ln R_{_{\rm V}} \, \right)^2 - 0.0954 \ln R_{_{\rm V}} + 0.297 \, \right] - 4.16 \right\} \tag{eq. 8-31}$$

where:

 $R_{\nu} = (VR/\nu) \times 10^{5}$  (this dimensionless term reduces to VR for practical application in English units)

V = channel velocity (ft/s or m/s)

R = hydraulic radius (ft or m)

Limited to  $0.0025C_1^{2.5} < R_y < 36$ 

A reference value of Manning's resistance coefficient,  $n_R$  is applicable to vegetation established on relatively smoothly graded fine-grained soil.

If vegetated channel liner mats are used, manufacturer-supplied roughness coefficients for particular mats may be used in the equation.

Maximum allowable shear stress,  $\tau_{va}$ , in pound per square foot is determined as a function of the retardance curve index,  $C_{\Gamma}$ . Very little information is available for vegetal performance under very high stresses and this relation is believed to be conservative.

$$\tau_{\rm va} = 0.75C_{\rm I}$$
 (eq. 8–32)

### 8.1 Riprap Sizing

Procedures for sizing rock to be used in soil riprap, void-filled riprap, and riprap over bedding are the same.

### 8.1.1 Mild Slope Conditions

When subcritical flow conditions occur and/or slopes are mild (less than 2 percent), UDFCD recommends the following equation (Hughes, et al, 1983):

$$d_{50} \ge \left\lceil \frac{VS^{0.17}}{4.5(G_s - 1)^{0.66}} \right\rceil^2$$
 Equation 8-11

Where:

V = mean channel velocity (ft/sec)

S = longitudinal channel slope (ft/ft)

 $d_{50}$  = mean rock size (ft)

Gs = specific gravity of stone (minimum = 2.50, typically 2.5 to 2.7), Note: In this equation (Gs -1) considers the buoyancy of the water, in that the specific gravity of water is subtracted from the specific gravity of the rock.

Note that Equation 8-11 is applicable for sizing riprap for channel lining with a longitudinal slope of no more than 2%. This equation is not intended for use in sizing riprap for steep slopes (typically in excess of 2 percent), rundowns, or protection downstream of culverts. Information on rundowns is provided in Section 7.0 of the *Hydraulic Structures* chapter of the USDCM, and protection downstream of culverts is discussed in the *Culverts and Bridges* chapter. For channel slopes greater than 2% use one of the methods presented in 8.1.2.

Rock size does not need to be increased for steeper channel side slopes, provided the side slopes are no steeper than 2.5H:1V (UDFCD 1982). Channel side slopes steeper than 2.5H:1V are not recommended because of stability, safety, and maintenance considerations. See Figure 8-34 for riprap placement specifications. At the upstream and downstream termination of a riprap lining, the thickness should be increased 50% for at least 3 feet to prevent undercutting.

#### 8.1.2 Steep Slope Conditions

Steep slope rock sizing equations are used for applications where the slope is greater than 2 percent and/or flows are in the supercritical flow regime. The following rock sizing equations may be referred to for riprap design analysis on steep slopes:

- CSU Equation, Development of Riprap Design Criteria by Riprap Testing in Flumes: Phase II
  (prepared by S.R. Abt, et al, Colorado State University, 1988). This method was developed for steep
  slopes from 2 to 20 percent.
- USDA- Agricultural Research Service Equations, Design of Rock Chutes (by K.M. Robinson, et al, USDA- ARS, 1998 Transactions of ASAE) and An Excel Program to Design Rock Chutes for Grade




619 N. Cascade Avenue, Suite 200 Colorado Springs, CO 80903


| Project: | nka-Ridge 2 |                    |
|----------|-------------|--------------------|
| Contact: |             | □ Note to the File |
| Phone:   |             | ☐ Job Information  |
| By:      | MAW         | ☐ Meeting Minutes  |


| Rip-rap sizing for channel                                                       | stabilization |
|----------------------------------------------------------------------------------|---------------|
| - Mild slope and flour                                                           |               |
| - uce equation 8-11 for                                                          | MHFD          |
| $d_{50} \geq \left(\frac{1.5(6^{2}-1)^{0.00}}{500000000000000000000000000000000$ |               |
| mean velocity = U = 4.2 ft/r.                                                    |               |
| longitudinal rlope = 5 = 1.58%.                                                  |               |
| Gr specific gravity of rome = Gr =                                               | 2.5           |
| 14.2(0.0158)0.17,2                                                               |               |
| $d_{5} \geq \frac{4.2(0.0158)^{0.17}}{4.5(2.5-1)^{0.66}} \geq \frac{2}{5}$       | 0.12 ft.      |
| dro min. = 6"                                                                    |               |
| Juce dro = 9" type L                                                             |               |
| dro min. = 6"                                                                    |               |


Ph: 719.785.0790 Fax: 719.785.0799


Innovative Design....Classic Results

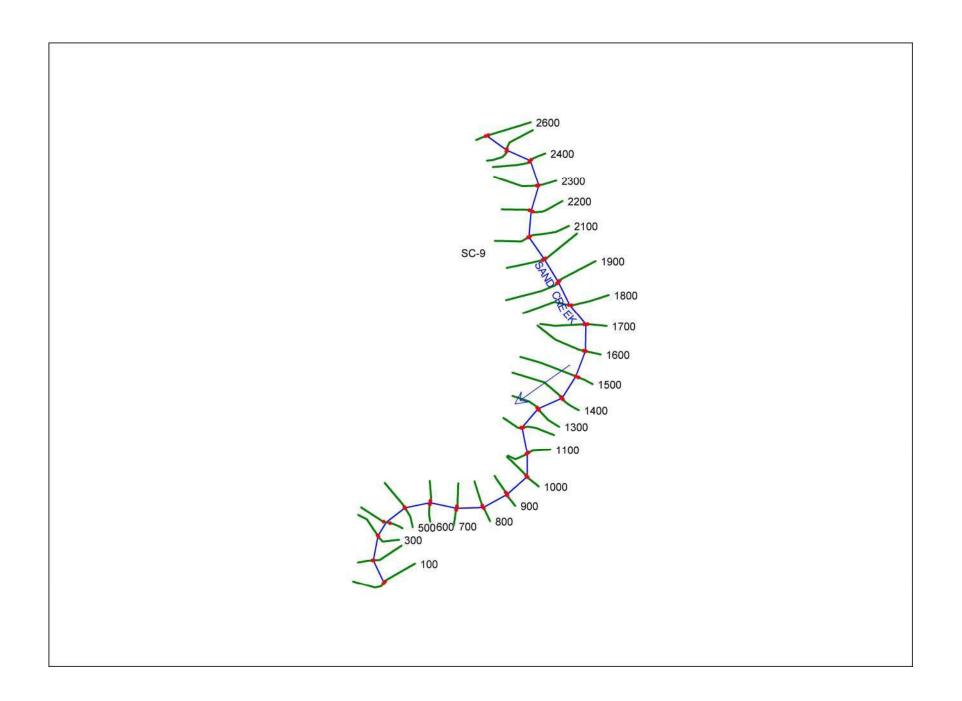


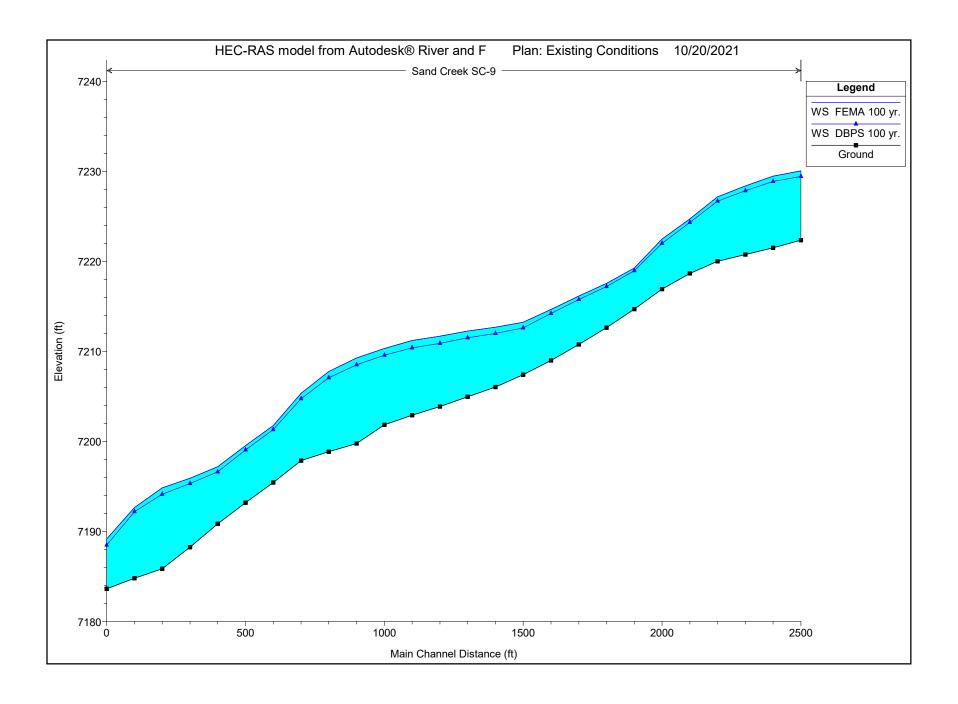


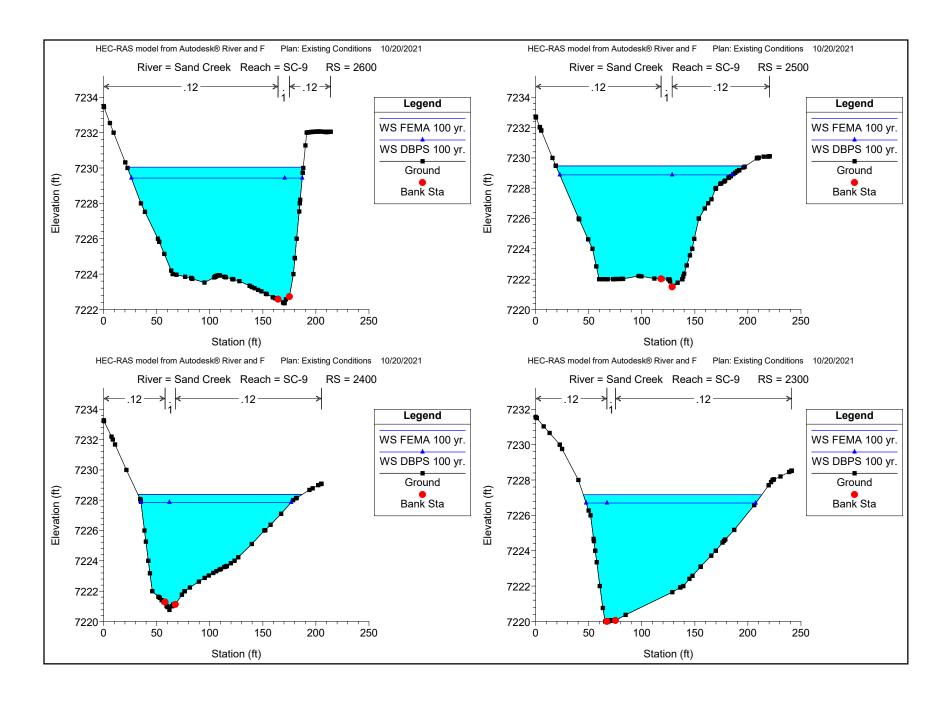


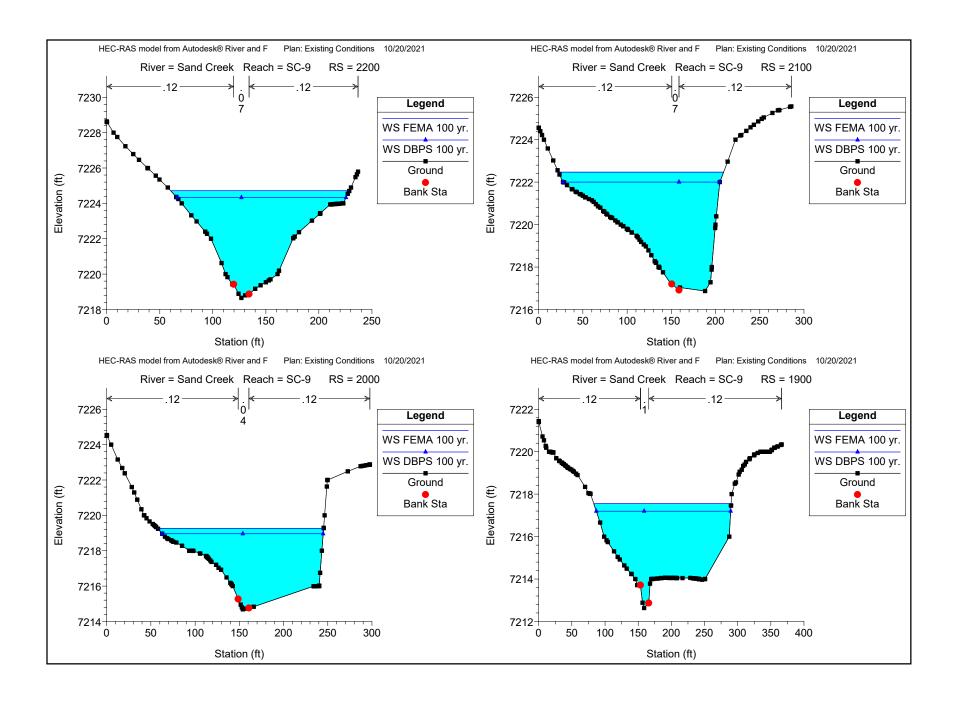


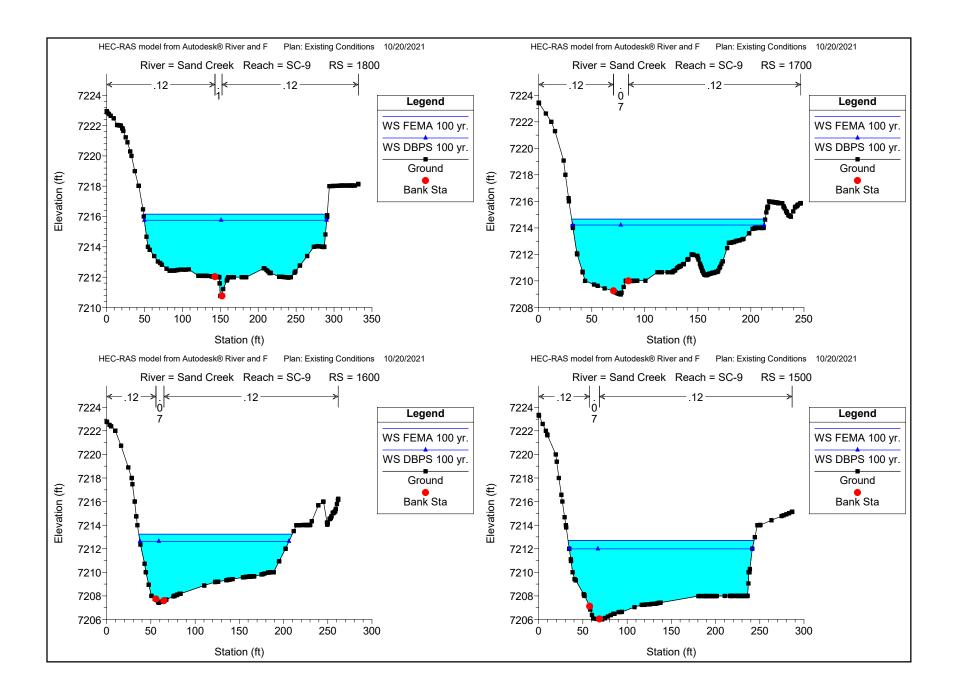

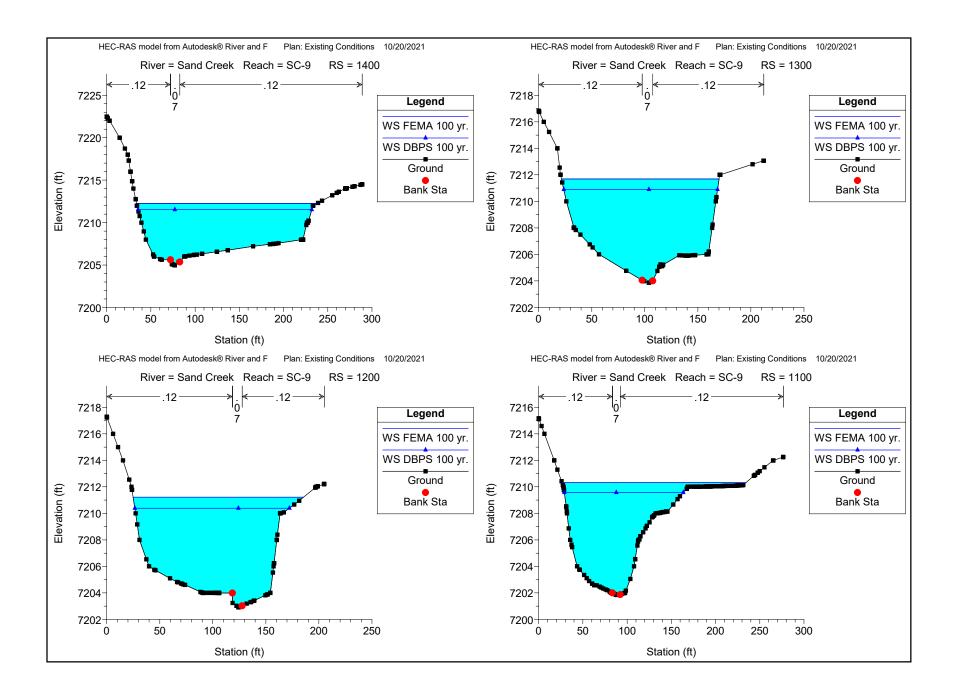

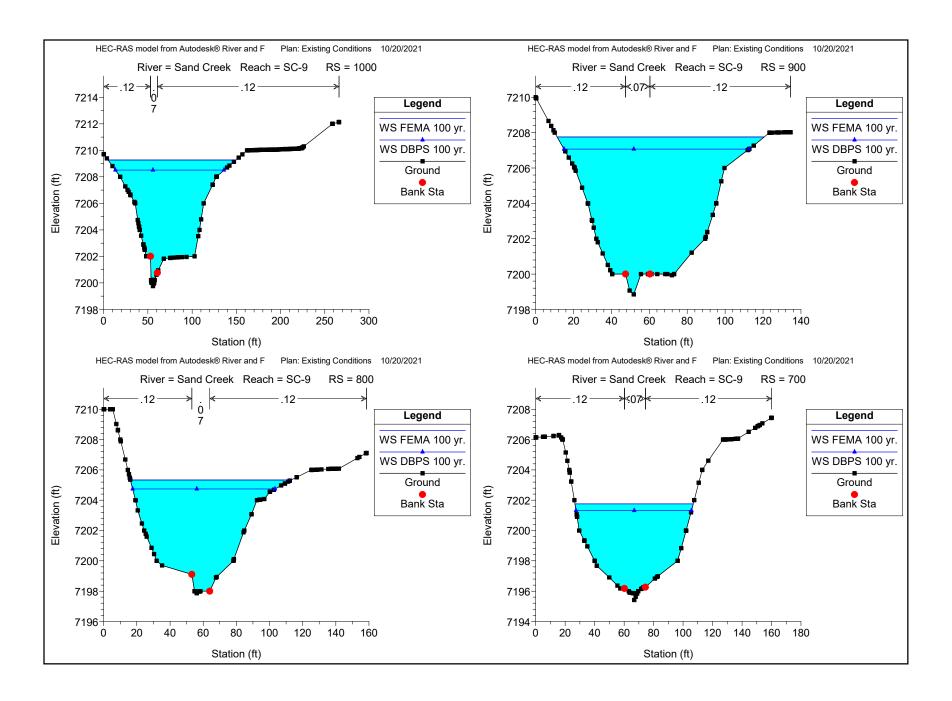

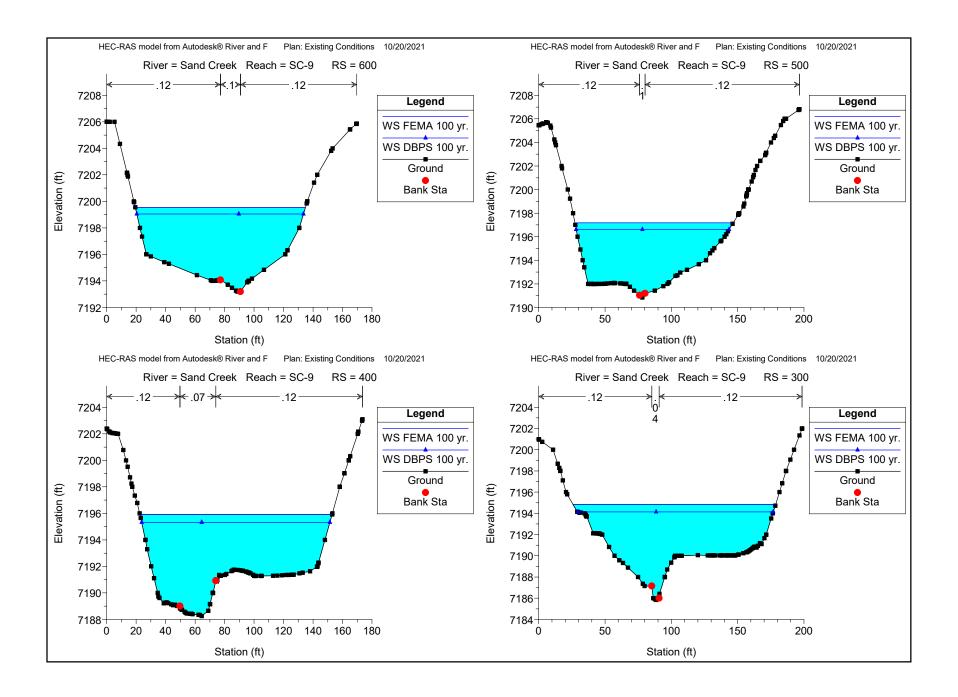

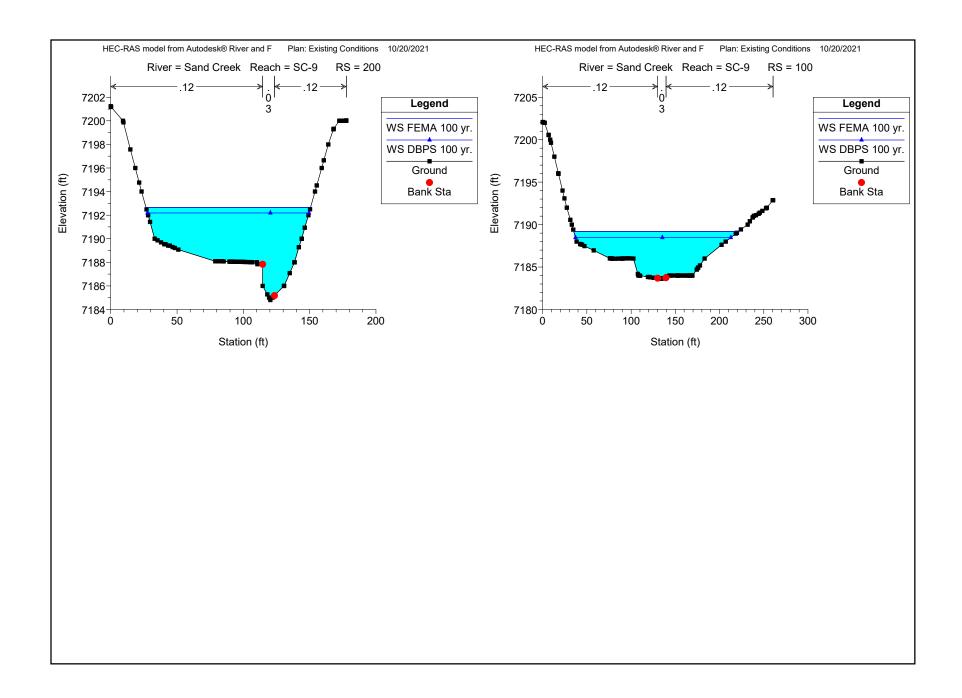



HEC-RAS Plan: Ex. Cond. River: Sand Creek Reach: SC-9


| HEC-RAS P | lan: Ex. Cond. | River: Sand Creek                     | Reach: SC-9 |           |           |           |              |             |           |            |           |             |           |           |             |
|-----------|----------------|---------------------------------------|-------------|-----------|-----------|-----------|--------------|-------------|-----------|------------|-----------|-------------|-----------|-----------|-------------|
| Reach     | River Sta      | Profile                               | Q Total     | Min Ch El | W.S. Elev | Crit W.S. | Max Chl Dpth | Hydr Radius | E.G. Elev | E.G. Slope | Vel Total | Shear Total | Flow Area | Top Width | Froude # XS |
|           |                |                                       | (cfs)       | (ft)      | (ft)      | (ft)      | (ft)         | (ft)        | (ft)      | (ft/ft)    | (ft/s)    | (lb/sq ft)  | (sq ft)   | (ft)      |             |
| SC-9      | 2600           | FEMA 100 yr.                          | 2600.00     | 7222.35   | 7230.04   |           | 7.69         | 5.42        | 7230.18   | 0.005197   | 2.85      | 1.76        | 913.30    | 165.94    | 0.22        |
| SC-9      | 2600           | DBPS 100 yr.                          | 2170.00     | 7222.35   | 7229.43   |           | 7.08         | 4.98        | 7229.55   | 0.005114   | 2.67      | 1.59        | 813.19    | 161.08    | 0.22        |
|           |                | ·                                     |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 2500           | FEMA 100 yr.                          | 2600.00     | 7221.49   | 7229.47   |           | 7.98         | 4.81        | 7229.63   | 0.006294   | 3.00      | 1.89        | 867.87    | 178.83    | 0.26        |
| SC-9      | 2500           | DBPS 100 yr.                          | 2170.00     | 7221.49   | 7228.88   |           | 7.39         | 4.68        |           | 0.005957   | 2.83      | 1.74        | 767.52    |           |             |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 2400           | FEMA 100 yr.                          | 2600.00     | 7220.76   | 7228.38   |           | 7.62         | 4.07        | 7228.69   | 0.014896   | 4.07      | 3.79        | 638.08    | 154.82    | 0.39        |
| SC-9      | 2400           | DBPS 100 yr.                          | 2170.00     | 7220.76   | 7227.85   |           | 7.09         | 3.91        | 7228.13   | 0.014193   | 3.87      | 3.46        | 560.02    | 141.56    | 0.38        |
| 00 0      | 2400           | DDI 0 100 yr.                         | 2170.00     | 1220.10   | 7227.00   |           | 7.00         | 0.01        | 7220.10   | 0.014100   | 0.07      | 0.40        | 000.02    | 141.00    | 0.00        |
| SC-9      | 2300           | FEMA 100 yr.                          | 2600.00     | 7220.00   | 7227.17   |           | 7.17         | 4.26        | 7227.40   | 0.011310   | 3.60      | 3.01        | 722.83    | 168.17    | 0.33        |
| SC-9      | 2300           | DBPS 100 yr.                          | 2170.00     | 7220.00   | 7226.70   |           | 6.70         | 4.20        |           | 0.011310   | 3.36      | 2.68        | 645.48    |           | 0.31        |
| 30-9      | 2300           | DBP3 100 yr.                          | 2170.00     | 7220.00   | 1220.10   |           | 0.70         | 4.00        | 7220.90   | 0.010742   | 3.30      | 2.00        | 045.46    | 159.61    | 0.31        |
| 00.0      | 2200           | FFMA 100                              | 2000.00     | 7040.05   | 7004.74   |           | 6.06         | 2.04        | 7005.65   | 0.000504   | F 20      | F 40        | 490.82    | 100.07    | 0.00        |
| SC-9      | 2200           | FEMA 100 yr.                          | 2600.00     | 7218.65   | 7224.71   |           | 6.06         | 2.91        | 7225.65   | 0.028534   | 5.30      | 5.18        |           | 168.37    | 0.80        |
| SC-9      | 2200           | DBPS 100 yr.                          | 2170.00     | 7218.65   | 7224.32   |           | 5.67         | 2.67        | 7225.21   | 0.028458   | 5.08      | 4.74        | 426.97    | 159.51    | 0.81        |
| 00.0      | 0400           | FENAN 400 :                           | 0000.00     | 7040.04   | 7000 47   |           | 5.00         | 2.00        | 7000.00   | 0.000700   | 4.50      | 4.00        | 570.40    | 400.77    | 0.56        |
| SC-9      | 2100           | FEMA 100 yr.                          | 2600.00     | 7216.91   | 7222.47   |           | 5.60         | 3.08        | 7222.96   | 0.022789   | 4.50      | 4.38        | 578.16    |           | 0.56        |
| SC-9      | 2100           | DBPS 100 yr.                          | 2170.00     | 7216.91   | 7222.00   |           | 5.13         | 2.76        | 7222.49   | 0.023773   | 4.41      | 4.10        | 492.54    | 177.30    | 0.59        |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 2000           | FEMA 100 yr.                          | 2600.00     | 7214.69   | 7219.27   | 7219.25   | 4.58         | 2.71        | 7220.59   | 0.023302   | 5.07      | 3.95        | 512.34    | 187.76    | 0.98        |
| SC-9      | 2000           | DBPS 100 yr.                          | 2170.00     | 7214.69   | 7218.96   | 7218.91   | 4.27         | 2.49        | 7220.13   | 0.022155   | 4.77      | 3.44        | 455.40    | 181.96    | 0.97        |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           | <u> </u>    |
| SC-9      | 1900           | FEMA 100 yr.                          | 2600.00     | 7212.63   | 7217.55   |           | 4.92         | 2.97        | 7217.86   | 0.024680   | 4.21      | 4.58        | 618.13    | 207.11    | 0.46        |
| SC-9      | 1900           | DBPS 100 yr.                          | 2170.00     | 7212.63   | 7217.20   |           | 4.57         | 2.68        | 7217.48   | 0.025323   | 3.98      | 4.23        | 544.59    | 202.67    | 0.46        |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           | <u> </u>    |
| SC-9      | 1800           | FEMA 100 yr.                          | 2600.00     | 7210.76   | 7216.16   |           | 5.40         | 3.55        | 7216.30   | 0.010533   | 3.00      | 2.34        | 867.60    | 242.34    | 0.28        |
| SC-9      | 1800           | DBPS 100 yr.                          | 2170.00     | 7210.76   | 7215.75   |           | 4.99         | 3.18        | 7215.88   | 0.010824   | 2.82      | 2.15        | 769.37    | 240.62    | 0.28        |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 1700           | FEMA 100 yr.                          | 2600.00     | 7208.98   | 7214.66   |           | 5.68         | 3.51        | 7215.03   | 0.015604   | 4.02      | 3.42        | 646.19    | 182.35    | 0.46        |
| SC-9      | 1700           | DBPS 100 yr.                          | 2170.00     | 7208.98   | 7214.21   |           | 5.23         | 3.10        | 7214.57   | 0.016339   | 3.84      | 3.17        | 565.04    | 180.53    | 0.48        |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 1600           | FEMA 100 yr.                          | 2600.00     | 7207.41   | 7213.24   |           | 5.83         | 3.85        | 7213.56   | 0.013840   | 3.86      | 3.33        | 673.00    | 173.53    | 0.41        |
| SC-9      | 1600           | DBPS 100 yr.                          | 2170.00     | 7207.41   | 7212.62   |           | 5.21         | 3.35        | 7212.94   | 0.016136   | 3.82      | 3.37        | 567.56    | 168.40    | 0.44        |
|           |                | ·                                     |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 1500           | FEMA 100 yr.                          | 2600.00     | 7206.04   | 7212.69   |           | 6.69         | 4.93        | 7212.81   | 0.004188   | 2.47      | 1.29        | 1051.22   | 210.36    | 0.22        |
| SC-9      | 1500           | DBPS 100 yr.                          | 2170.00     | 7206.04   | 7211.98   |           | 5.98         | 4.32        | 7212.10   | 0.004673   | 2.40      | 1.26        | 904.60    | 206.98    | 0.23        |
|           |                |                                       |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 1400           | FEMA 100 yr.                          | 2600.00     | 7204.96   | 7212.26   |           | 7.30         | 5.00        | 7212.39   | 0.004241   | 2.52      | 1.32        | 1031.11   | 204.28    | 0.23        |
| SC-9      | 1400           | DBPS 100 yr.                          | 2170.00     | 7204.96   | 7211.51   |           | 6.55         | 4.45        |           | 0.004685   | 2.46      | 1.30        | 882.00    | 196.51    | 0.24        |
| -         | 1.00           | 55. c .cc j                           | 2110.00     | 1201.00   | 7211.01   |           | 0.00         | 0           | .2        | 0.001000   | 20        | 1.00        | 002.00    | 100.01    | 0.2         |
| SC-9      | 1300           | FEMA 100 yr.                          | 2600.00     | 7203.87   | 7211.69   |           | 7.82         | 5.49        | 7211.90   | 0.005574   | 3.14      | 1.91        | 829.19    | 148.59    | 0.27        |
| SC-9      | 1300           | DBPS 100 yr.                          | 2170.00     | 7203.87   | 7211.09   |           | 7.02         | 4.85        | 7211.90   | 0.005374   | 3.14      | 1.86        | 712.30    | 144.96    | 0.27        |
| 00-3      | 1300           | DDI O 100 yr.                         | 2170.00     | 1203.01   | 7210.03   |           | 7.02         | 4.00        | 7211.10   | 0.000134   | 5.05      | 1.00        | 7 12.50   | 144.50    | 0.23        |
| SC-9      | 1200           | FEMA 100 yr.                          | 2600.00     | 7202.91   | 7211.21   |           | 8.30         | 5.49        | 7211.39   | 0.004722   | 2.89      | 1.62        | 900.68    | 160.49    | 0.25        |
|           | 1200           | · · · · · · · · · · · · · · · · · · · |             |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9      | 1200           | DBPS 100 yr.                          | 2170.00     | 7202.91   | 7210.39   |           | 7.48         | 5.19        | 7210.55   | 0.004885   | 2.80      | 1.58        | 774.19    | 145.69    | 0.24        |
| 00.0      | 1100           | FFMA 400                              | 2000.00     | 7004.05   | 7040.00   |           | 0.47         | 0.44        | 7040 70   | 0.000447   | 0.00      | 4.00        | 700.05    | 200.42    | 0.11        |
| SC-9      | 1100           | FEMA 100 yr.                          | 2600.00     | 7201.85   | 7210.32   |           | 8.47         | 3.44        | 7210.73   | 0.009117   | 3.60      | 1.96        | 722.95    |           | 0.48        |
| SC-9      | 1100           | DBPS 100 yr.                          | 2170.00     | 7201.85   | 7209.57   |           | 7.72         | 4.40        | 7209.91   | 0.008409   | 3.62      | 2.31        | 600.24    | 134.55    | 0.39        |
|           |                |                                       |             |           |           |           | _            |             |           |            |           |             |           |           | _           |
| SC-9      | 1000           | FEMA 100 yr.                          | 2600.00     | 7199.76   | 7209.27   |           | 9.51         | 4.28        | 7209.70   | 0.012015   | 4.09      | 3.21        | 635.18    | 144.59    | 0.44        |
| SC-9      | 1000           | DBPS 100 yr.                          | 2170.00     | 7199.76   | 7208.51   |           | 8.75         | 4.21        | 7208.91   | 0.012048   | 4.07      | 3.17        | 532.92    | 122.92    | 0.43        |


HEC-RAS Plan: Ex. Cond. River: Sand Creek Reach: SC-9 (Continued)


| HEC-RAS P | lan: Ex. Cond. | River: Sand Creek         | Reach: SC-9        | (Continued)        |                    |           |              |              |           |                      |              |              |                  |                  |              |
|-----------|----------------|---------------------------|--------------------|--------------------|--------------------|-----------|--------------|--------------|-----------|----------------------|--------------|--------------|------------------|------------------|--------------|
| Reach     | River Sta      | Profile                   | Q Total            | Min Ch El          | W.S. Elev          | Crit W.S. | Max Chl Dpth | Hydr Radius  | E.G. Elev | E.G. Slope           | Vel Total    | Shear Total  | Flow Area        | Top Width        | Froude # XS  |
|           |                |                           | (cfs)              | (ft)               | (ft)               | (ft)      | (ft)         | (ft)         | (ft)      | (ft/ft)              | (ft/s)       | (lb/sq ft)   | (sq ft)          | (ft)             |              |
|           |                |                           |                    |                    |                    |           |              |              |           |                      |              |              |                  |                  |              |
| SC-9      | 900            | FEMA 100 yr.              | 2600.00            | 7198.85            | 7207.76            |           | 8.91         | 4.77         | 7208.44   | 0.012804             | 4.88         | 3.81         | 533.05           | 109.31           | 0.53         |
| SC-9      | 900            | DBPS 100 yr.              | 2170.00            | 7198.85            | 7207.07            |           | 8.22         | 4.61         | 7207.67   | 0.012460             | 4.70         | 3.59         | 461.30           | 97.66            | 0.51         |
| SC-9      | 800            | FEMA 100 yr.              | 2600.00            | 7197.87            | 7205.34            |           | 7.47         | 4.02         | 7206.59   | 0.027271             | 6.52         | 6.85         | 398.94           | 97.06            | 0.78         |
| SC-9      | 800            | DBPS 100 yr.              | 2170.00            | 7197.87            | 7204.74            |           | 6.87         | 3.92         |           | 0.026867             | 6.31         | 6.57         | 344.05           | 85.87            | 0.75         |
| SC-9      | 700            | FEMA 100 yr.              | 2600.00            | 7195.42            | 7201.76            | 7201.35   | 6.34         | 4.05         | 7203.28   | 0.040315             | 7.82         | 10.19        | 332.43           | 80.30            | 0.86         |
| SC-9      | 700            | DBPS 100 yr.              | 2170.00            | 7195.42            | 7201.70            | 7200.92   | 5.89         | 3.72         | 7202.65   | 0.038748             | 7.30         | 8.99         | 297.30           | 78.33            | 0.84         |
| 20.0      | 200            | FF144 400                 | 2000.00            | 7400.40            | 7100 50            |           | 0.04         | 1.00         | 7000.00   | 0.000700             | 5.40         |              | 504.40           | 115.15           | 2.40         |
| SC-9      | 600            | FEMA 100 yr. DBPS 100 yr. | 2600.00<br>2170.00 | 7193.19<br>7193.19 | 7199.53<br>7199.04 |           | 6.34<br>5.85 | 4.29<br>3.89 |           | 0.022766<br>0.022724 | 5.18<br>4.87 | 6.09<br>5.53 | 501.48<br>445.57 | 115.45<br>113.11 | 0.46<br>0.46 |
|           | 000            | 55. 6 .00 y.:             | 2170.00            | 7 100.10           | 7 100.01           |           | 0.00         | 0.00         | 7 100.10  | 0.022.2.             | 1.07         | 0.00         | 110.01           |                  | 0.10         |
| SC-9      | 500            | FEMA 100 yr.              | 2600.00            | 7190.84            | 7197.18            |           | 6.34         | 4.16         | 7197.62   | 0.024773             | 5.16         | 6.43         | 503.76           | 119.34           | 0.46         |
| SC-9      | 500            | DBPS 100 yr.              | 2170.00            | 7190.84            | 7196.62            |           | 5.78         | 3.75         | 7197.03   | 0.026244             | 4.96         | 6.14         | 437.44           | 115.25           | 0.46         |
| SC-9      | 400            | FEMA 100 yr.              | 2600.00            | 7188.25            | 7195.91            |           | 7.66         | 4.78         | 7196.34   | 0.008189             | 4.07         | 2.45         | 638.96           | 130.44           | 0.42         |
| SC-9      | 400            | DBPS 100 yr.              | 2170.00            | 7188.25            | 7195.32            |           | 7.07         | 4.31         | 7195.72   | 0.008180             | 3.85         | 2.20         | 563.27           | 127.72           | 0.42         |
| SC-9      | 300            | FEMA 100 yr.              | 2600.00            | 7185.84            | 7194.84            |           | 9.00         | 4.52         | 7195.64   | 0.008073             | 3.70         | 2.28         | 703.58           | 152.77           | 0.59         |
| SC-9      | 300            | DBPS 100 yr.              | 2170.00            | 7185.84            | 7194.14            |           | 8.30         | 3.98         |           | 0.008869             | 3.63         | 2.20         | 597.14           | 147.37           | 0.64         |
| SC-9      | 200            | FEMA 100 yr.              | 2600.00            | 7184.80            | 7192.65            | 7192.65   | 7.85         | 4.17         | 7194.62   | 0.010470             | 4.88         | 2.73         | 533.11           | 124.10           | 0.96         |
| SC-9      | 200            | DBPS 100 yr.              | 2170.00            | 7184.80            | 7192.03            | 7192.03   | 7.83         | 3.80         |           |                      | 4.56         | 2.73         | 476.02           | 124.10           | 0.95         |
|           |                |                           |                    |                    |                    |           |              |              |           |                      |              |              |                  |                  |              |
| SC-9      | 100            | FEMA 100 yr.              | 2600.00            | 7183.63            | 7189.18            | 7189.18   | 5.55         | 3.39         |           | 0.011738             | 4.10         | 2.48         | 634.04           | 186.15           | 0.96         |
| SC-9      | 100            | DBPS 100 yr.              | 2170.00            | 7183.63            | 7188.47            | 7185.99   | 4.84         | 2.87         | 7190.25   | 0.015020             | 4.29         | 2.69         | 506.39           | 175.71           | 1.11         |

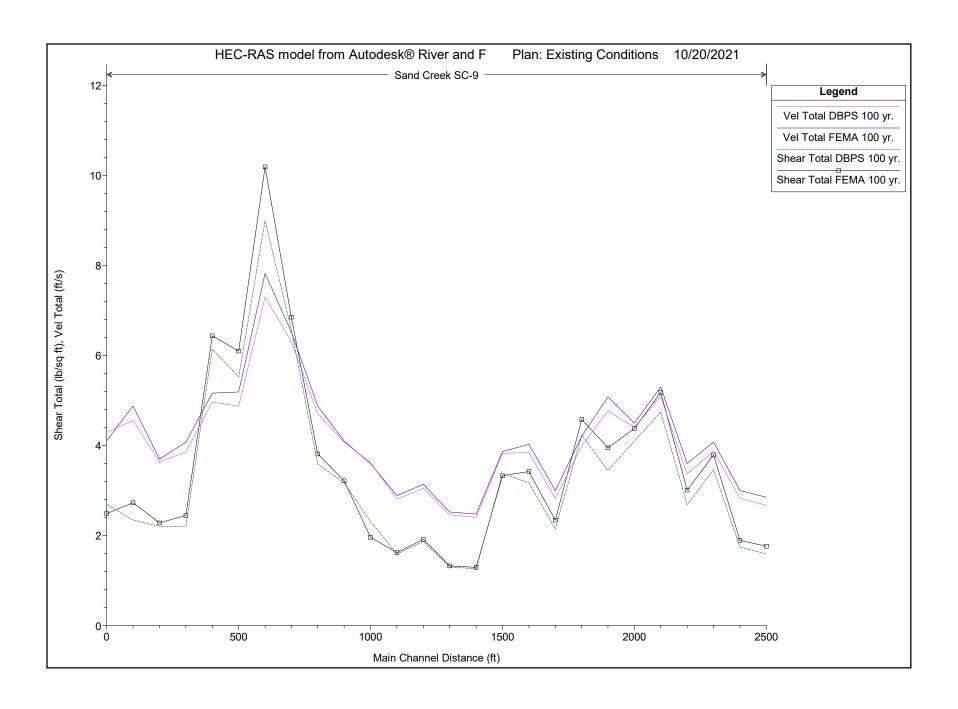


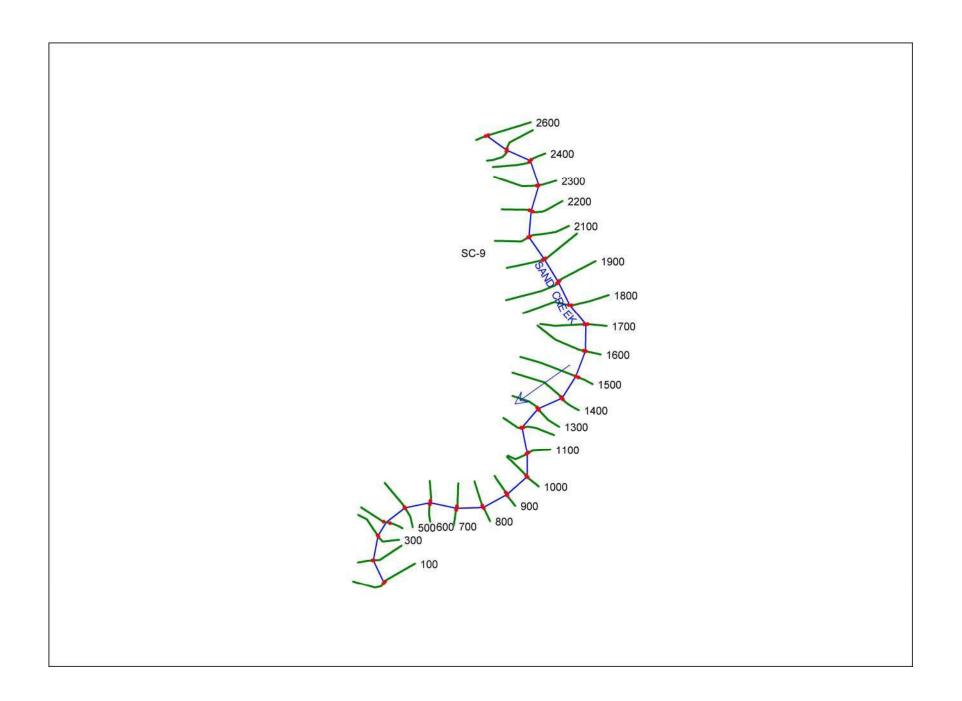


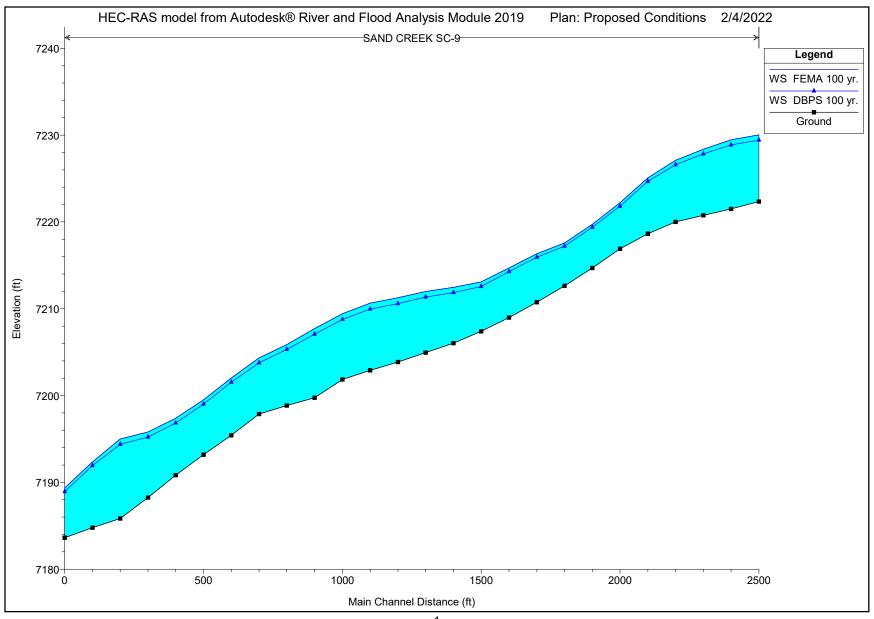


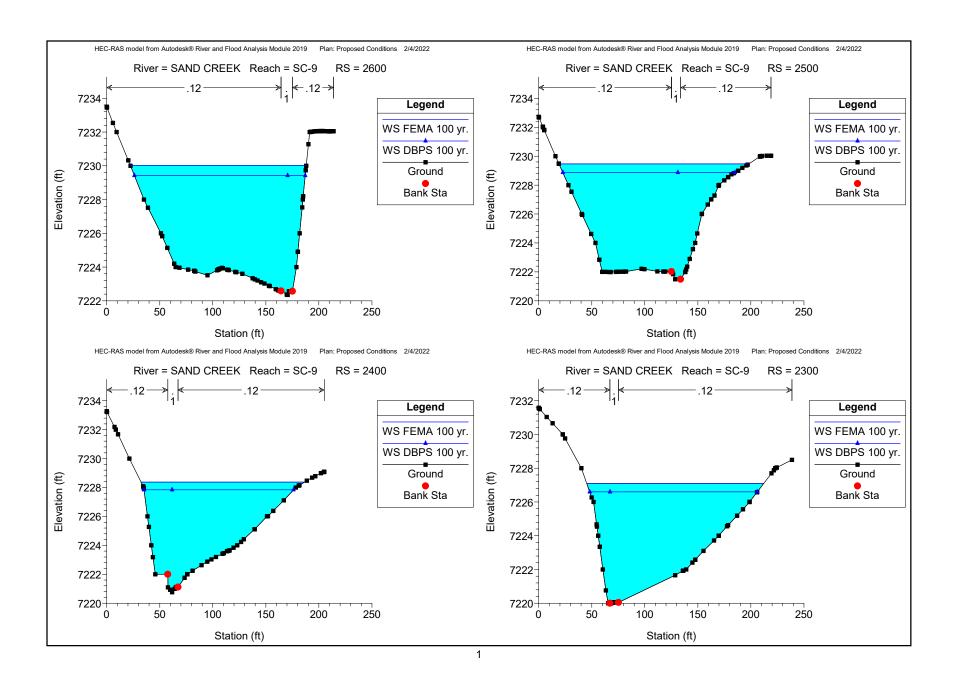


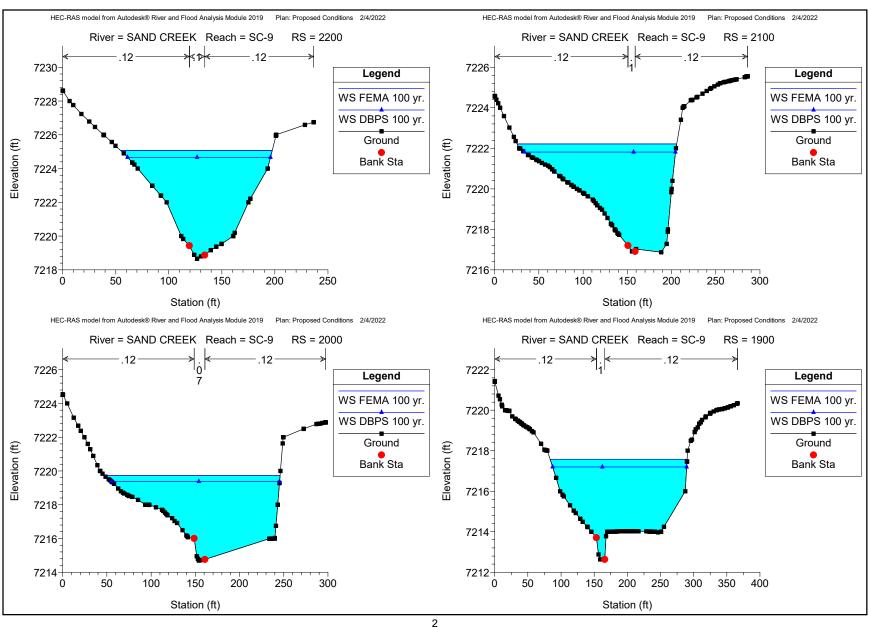


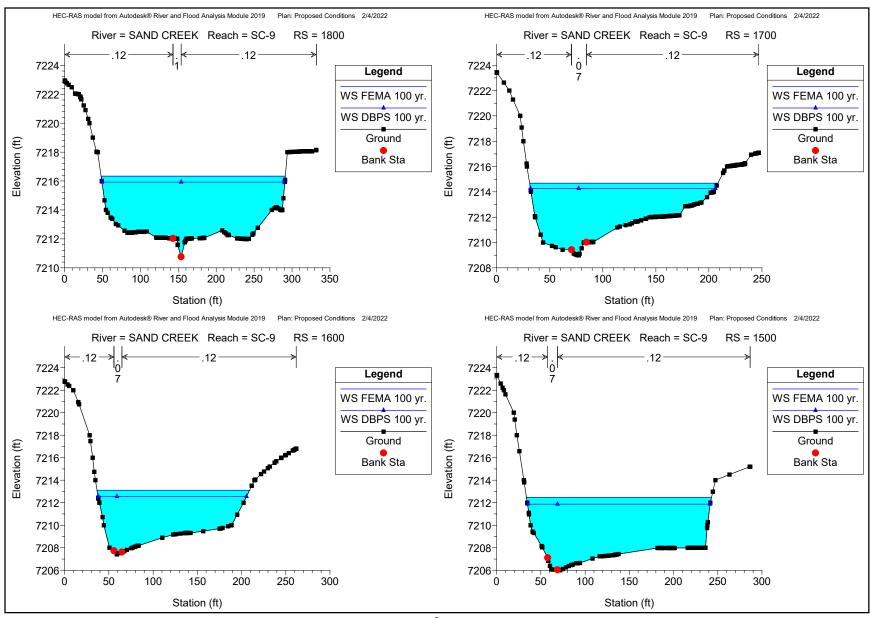

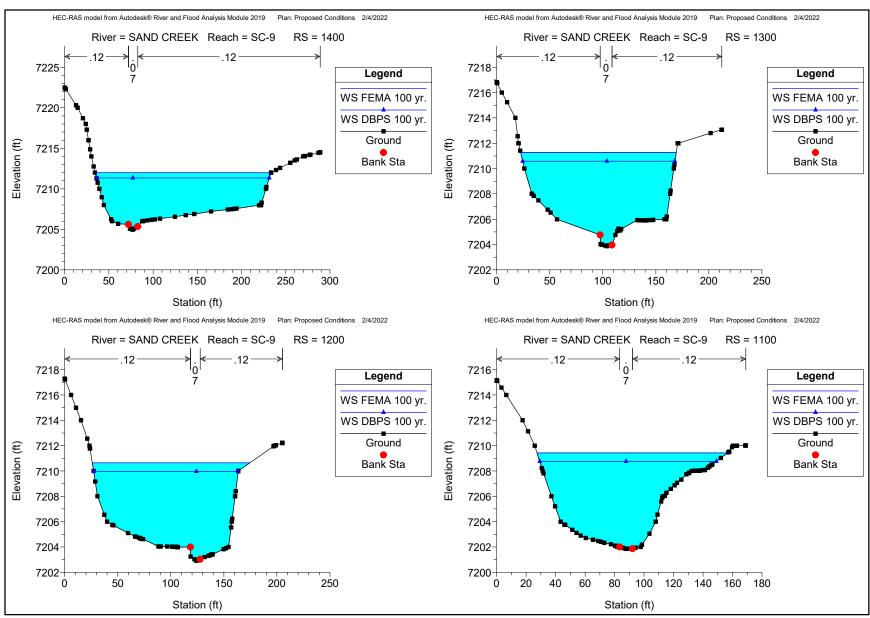

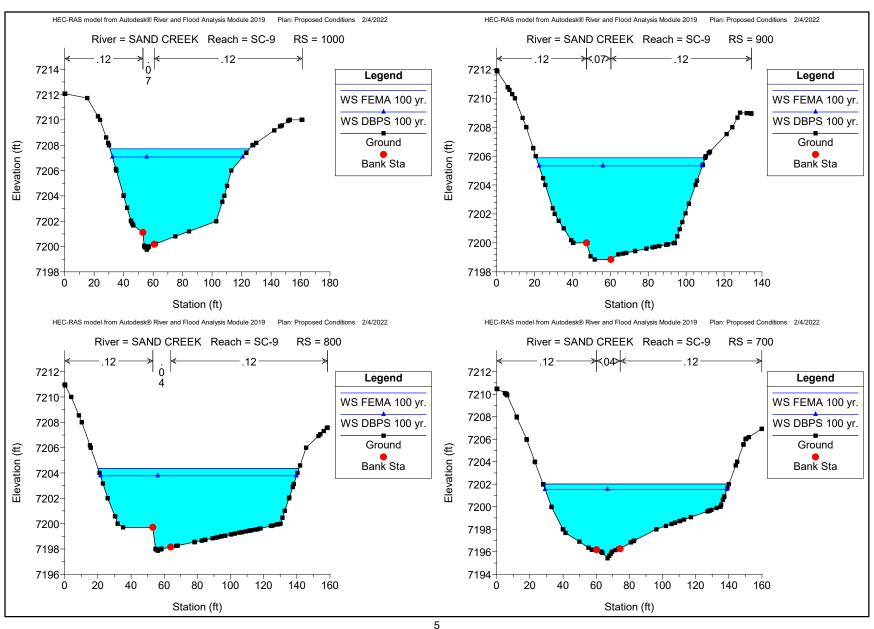

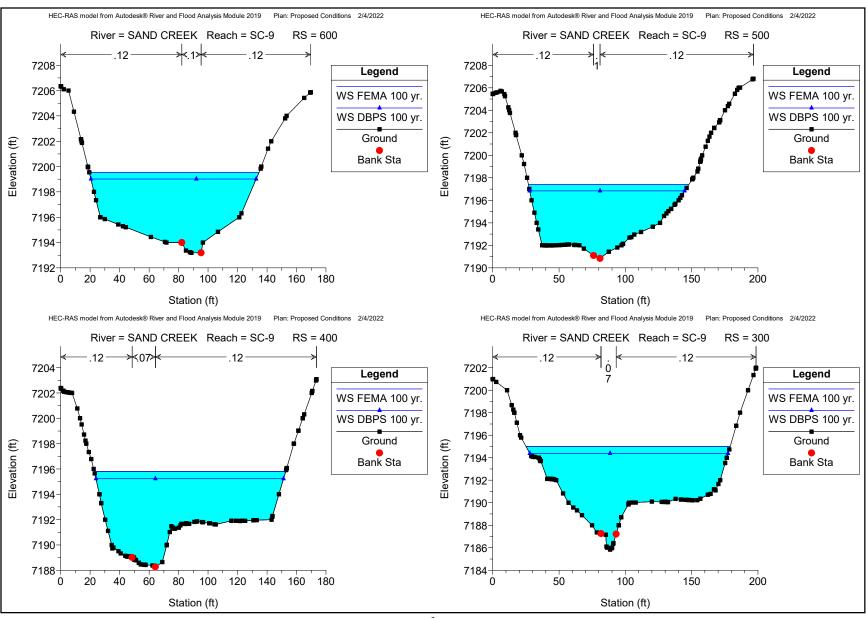

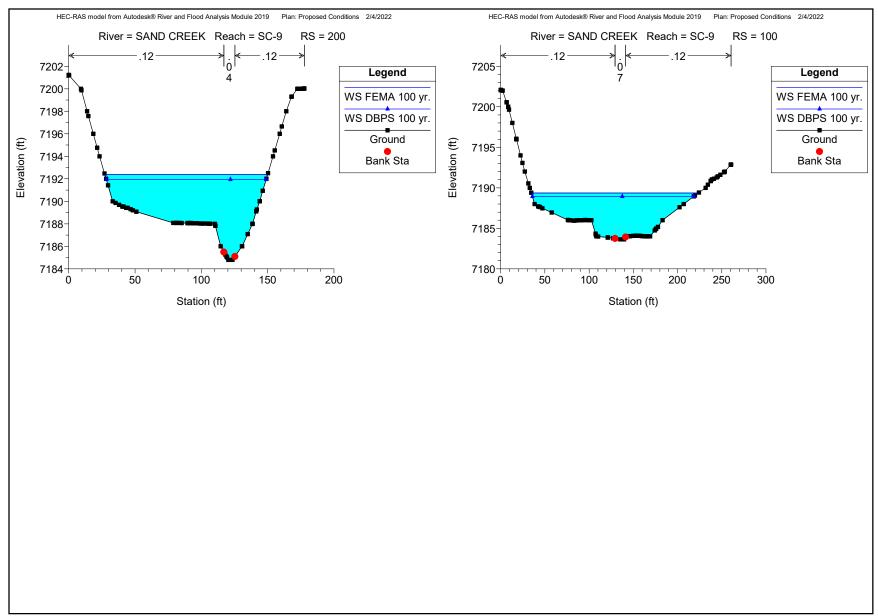



HEC-RAS Plan: Proposed Con River: SAND CREEK Reach: SC-9

| \$\text{SCG}\$   2000   \text{OBS}\$   109 \text{W}   2170 00   7222 45   7229.49   7.07   4.07   7229.54   0.005132   267   1.56   612.14   161.00   0.22   \$\text{SCG}\$   2500   FEMA 100 \text{W}   2000 00   7221.49   7220.87   7.38   4.66   7229.01   0.005132   2.65   1.71   767.75   162.2   0.20   \$\text{SCG}\$   2500   0.005109 \text{W}   2170 00   7220.67   7220.87   7.38   4.66   7229.01   0.005132   2.65   1.71   767.75   162.2   0.20   \$\text{SCG}\$   2000   0.005109 \text{W}   2170 00   7220.76   7220.87   7.66   4.02   7226.68   0.005572   4.12   3.54   680.50   154.16   0.33   \$\text{SCG}\$   2000   0.005109 \text{W}   2170 00   7220.76   7227.68   7.06   3.64   7228.67   0.005132   3.68   3.51   710.81   166.69   0.33   \$\text{SCG}\$   2000   0.005109 \text{W}   2200 00   7220.00   7225.69   6.69   3.005   7227.30   0.0011472   3.46   2.80   0.00583   2.65   \$\text{SCG}\$   2000   0.005109 \text{W}   2170 00   7220.00   7225.69   6.69   3.005   7225.30   0.0011472   3.46   2.80   0.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583   1.00583 | HEC-RAS P | lan: Proposed | Con River: SAND | CREEK Read | h: SC-9   |           |           |              |             |           |            |           |             |           |           |             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------|-----------------|------------|-----------|-----------|-----------|--------------|-------------|-----------|------------|-----------|-------------|-----------|-----------|-------------|
| \$6.9 \$80.0   FEMA 100 yr.   280.0 00   722.3 5   722.0 0.0   7.8 6   5.42   772.9 17   0.085716   2.85   1.7 6   912.1 5   185.8 6   0.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Reach     | River Sta     | Profile         | Q Total    | Min Ch El | W.S. Elev | Crit W.S. | Max Chl Dpth | Hydr Radius | E.G. Elev | E.G. Slope | Vel Total | Shear Total | Flow Area | Top Width | Froude # XS |
| SC-9 2800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |               |                 | (cfs)      | (ft)      | (ft)      | (ft)      | (ft)         | (ft)        | (ft)      | (ft/ft)    | (ft/s)    | (lb/sq ft)  | (sq ft)   | (ft)      |             |
| Section   Sect                  | SC-9      | 2600          | FEMA 100 yr.    | 2600.00    | 7222.35   | 7230.03   |           | 7.68         | 5.42        | 7230.17   | 0.005216   | 2.85      | 1.76        | 912.13    | 165.86    | 0.22        |
| \$6.9   2500   \$689 109 yr.   2170 00   7221 49   72287   7.38   4.69   722801   0.005833   2.88   1.71   767.75   162.25   0.2   \$6.9   2400   \$FEMA 100 yr.   2400.00   7220.00   7220.78   7220.78   7.61   4.02   7228.69   0.01587   4.12   3.94   6.03 0.01   154.16   0.33   \$6.9   2400   \$6898 100 yr.   2470.00   7220.00   7227.08   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.0          | SC-9      | 2600          | DBPS 100 yr.    | 2170.00    | 7222.35   | 7229.42   |           | 7.07         | 4.97        | 7229.54   | 0.005132   | 2.67      | 1.59        | 812.14    | 161.00    | 0.22        |
| \$6.9   2500   \$689 109 yr.   2170 00   7221 49   72287   7.38   4.69   722801   0.005833   2.88   1.71   767.75   162.25   0.2   \$6.9   2400   \$FEMA 100 yr.   2400.00   7220.00   7220.78   7220.78   7.61   4.02   7228.69   0.01587   4.12   3.94   6.03 0.01   154.16   0.33   \$6.9   2400   \$6898 100 yr.   2470.00   7220.00   7227.08   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.00   7.0          |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| 80-9 2400 FEMA 100 yr. 2600.00 7220.76 7228.37 7.61 4.02 7228.69 0.016878 4.12 3.94 830.50 154.16 0.33 80.9 2400 BBPS 100 yr. 2170.00 7220.76 7227.84 7.08 3.84 7228.12 0.015132 3.53 3.86 859.52 141.06 0.33 80.9 2200 FEMA 100 yr. 2270.00 7227.09 7.09 4.22 7227.33 0.015132 3.50 3.80 591.62 141.06 0.33 80.9 2200 FEMA 100 yr. 2270.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 7220.00 72                | SC-9      | 2500          | FEMA 100 yr.    | 2600.00    | 7221.49   | 7229.46   |           | 7.97         | 4.81        | 7229.62   | 0.006149   | 2.99      | 1.85        | 868.34    | 178.90    | 0.26        |
| SC-9 200 FEMA 100 yr. 2170.00 7220.76 7227.84 7.08 3.84 7228.12 0.015132 3.83 3.83 581.52 141.08 0.33  SC-9 200 FEMA 100 yr. 2270.00 7220.00 7220.00 6.50 6.50 3.05 7228.80 0.011472 3.86 3.12 710.81 188.89 0.33  SC-9 200 FEMA 100 yr. 2270.00 7220.00 7220.00 6.50 6.50 3.05 7228.80 0.011472 3.46 2.83 629.83 157.88 0.33  SC-9 200 DEPS 100 yr. 2170.00 7218.65 7225.07 6.42 3.48 7226.61 0.027276 5.20 5.03 449.67 144270 0.55  SC-9 200 DEPS 100 yr. 2170.00 7218.65 7225.07 6.42 3.48 7226.61 0.027276 5.20 5.03 449.67 144270 0.55  SC-9 200 DEPS 100 yr. 2170.00 7218.65 7225.07 6.42 3.48 7226.61 0.027276 5.20 5.03 449.67 144270 0.55  SC-9 200 DEPS 100 yr. 2170.00 7218.61 7222.21 5.34 2.92 7222.88 0.001413 4.89 5.54 443.36 134.70 0.55  SC-9 2100 DEPS 100 yr. 2170.00 7218.61 7222.82 4.96 2.68 7222.25 0.03123 4.71 5.22 4661.10 171.07 0.55  SC-9 2000 DEPS 100 yr. 2170.00 7218.61 7221.87 5.00 5.00 5.00 5.00 5.00 5.00 5.00 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SC-9      | 2500          | DBPS 100 yr.    | 2170.00    | 7221.49   | 7228.87   |           | 7.38         | 4.69        | 7229.01   | 0.005833   | 2.83      | 1.71        | 767.75    | 162.25    | 0.24        |
| SC-9 200 FEMA 100 yr. 2170.00 7220.76 7227.84 7.08 3.84 7228.12 0.015132 3.83 3.83 581.52 141.08 0.33  SC-9 200 FEMA 100 yr. 2270.00 7220.00 7220.00 6.50 6.50 3.05 7228.80 0.011472 3.86 3.12 710.81 188.89 0.33  SC-9 200 FEMA 100 yr. 2270.00 7220.00 7220.00 6.50 6.50 3.05 7228.80 0.011472 3.46 2.83 629.83 157.88 0.33  SC-9 200 DEPS 100 yr. 2170.00 7218.65 7225.07 6.42 3.48 7226.61 0.027276 5.20 5.03 449.67 144270 0.55  SC-9 200 DEPS 100 yr. 2170.00 7218.65 7225.07 6.42 3.48 7226.61 0.027276 5.20 5.03 449.67 144270 0.55  SC-9 200 DEPS 100 yr. 2170.00 7218.65 7225.07 6.42 3.48 7226.61 0.027276 5.20 5.03 449.67 144270 0.55  SC-9 200 DEPS 100 yr. 2170.00 7218.61 7222.21 5.34 2.92 7222.88 0.001413 4.89 5.54 443.36 134.70 0.55  SC-9 2100 DEPS 100 yr. 2170.00 7218.61 7222.82 4.96 2.68 7222.25 0.03123 4.71 5.22 4661.10 171.07 0.55  SC-9 2000 DEPS 100 yr. 2170.00 7218.61 7221.87 5.00 5.00 5.00 5.00 5.00 5.00 5.00 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 200 FEMA 100 yr. 2000.00 7220.00 7227.00 7.00 4.22 7227.33 0.011823 3.66 3.12 710.81 160.60 0.33 6S-9 200 0.00 FEMA 100 yr. 2000.00 7220.50 0.50 3.50 7226.80 0.011472 3.46 2.83 620.83 175.86 0.33 6S-9 200 FEMA 100 yr. 2000.00 7216.85 7225.07 6.42 3.48 7225.61 0.027276 5.20 5.03 490.67 144.70 0.55 6S-9 200 DBF 100 yr. 2170.00 7216.85 7225.07 6.42 3.48 7225.61 0.027276 5.20 5.03 490.67 144.70 0.55 6S-9 200 DBF 100 yr. 2170.00 7216.85 7225.07 6.42 3.48 7225.61 0.027276 5.20 5.03 490.67 144.70 0.55 6S-9 200 DBF 100 yr. 2170.00 7216.91 7221.22 5.34 2.02 7225.85 0.031133 4.71 5.22 461.14 171.07 0.55 6S-9 200 DBF 100 yr. 2170.00 7216.91 7221.82 4.95 2.88 7222.25 0.03123 4.71 5.22 461.14 171.07 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.88 2.75 7210.77 0.020191 4.12 3.47 527.00 189.99 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.88 2.75 7210.77 0.020191 4.12 3.47 527.00 189.99 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.88 2.75 7210.77 0.020191 4.12 3.47 527.00 189.99 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.88 2.75 7210.77 0.020191 4.12 3.47 527.00 189.99 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.88 2.75 7210.77 0.020191 4.12 3.47 527.00 189.99 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.89 2.75 7210.77 0.020191 4.12 3.47 527.00 189.99 0.55 6S-9 200 DBF 100 yr. 2170.00 7214.60 7219.37 4.50 4.57 2.69 7214.80 0.024809 3.37 4.17 4.47 624.18 0.026.1 0.44 55.90 0.026.1 0.024809 3.37 4.17 4.47 624.18 0.026.1 0.44 55.90 0.026.1 0.024809 3.37 4.17 4.47 624.18 0.026.1 0.44 55.90 0.026.1 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.024809 0.0248                | SC-9      | 2400          | FEMA 100 yr.    | 2600.00    | 7220.76   | 7228.37   |           | 7.61         | 4.02        | 7228.69   | 0.015678   | 4.12      | 3.94        | 630.50    | 154.16    | 0.39        |
| SS-9 200 BPS 100 yr. 2200.0 7226.50 6.50 6.50 3.96 7226.80 0.011472 3.45 2.83 629.83 157.86 0.33 65.9 2200 FEMA 100 yr. 2200.00 7216.65 7224.66 6.01 3.28 7225.81 0.027276 5.20 5.53 4.96.67 142.79 0.55 65.9 200 DPS 100 yr. 2170.00 7216.65 7224.66 6.01 3.28 7225.14 0.026113 4.80 5.34 443.36 134.70 0.56 65.9 2100 DPS 100 yr. 2200.00 7216.61 7222.21 5.34 2.92 7222.88 0.030018 4.80 5.64 531.22 180.50 0.56 65.9 2100 DPS 100 yr. 2200.00 7216.61 7221.82 4.85 2.86 7222.25 0.031233 4.71 5.22 481.14 171.07 0.55 65.9 2000 DPS 100 yr. 2200.00 7214.69 7219.73 5.03 2.96 7220.17 0.020831 4.37 3.87 595.52 198.56 0.55 65.9 2000 DPS 100 yr. 2200.00 7214.69 7219.73 4.68 2.75 7219.77 0.02097 4.12 3.47 527.09 189.99 0.55 65.9 1900 DPS 100 yr. 2200.00 7214.69 7219.35 4.66 2.76 7217.78 0.02097 4.12 3.47 527.09 189.99 0.55 65.9 1900 DPS 100 yr. 210 yr. 2200.00 7214.69 7219.35 4.57 2.69 7217.48 0.02490 3.97 4.17 5.72 6.72 6.72 6.72 6.72 6.72 6.72 6.72 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | SC-9      | 2400          | DBPS 100 yr.    | 2170.00    | 7220.76   | 7227.84   |           | 7.08         | 3.84        | 7228.12   | 0.015132   | 3.93      | 3.63        | 551.52    | 141.06    | 0.38        |
| SS-9 200 BPS 100 yr. 2200.0 7226.50 6.50 6.50 3.96 7226.80 0.011472 3.45 2.83 629.83 157.86 0.33 65.9 2200 FEMA 100 yr. 2200.00 7216.65 7224.66 6.01 3.28 7225.81 0.027276 5.20 5.53 4.96.67 142.79 0.55 65.9 200 DPS 100 yr. 2170.00 7216.65 7224.66 6.01 3.28 7225.14 0.026113 4.80 5.34 443.36 134.70 0.56 65.9 2100 DPS 100 yr. 2200.00 7216.61 7222.21 5.34 2.92 7222.88 0.030018 4.80 5.64 531.22 180.50 0.56 65.9 2100 DPS 100 yr. 2200.00 7216.61 7221.82 4.85 2.86 7222.25 0.031233 4.71 5.22 481.14 171.07 0.55 65.9 2000 DPS 100 yr. 2200.00 7214.69 7219.73 5.03 2.96 7220.17 0.020831 4.37 3.87 595.52 198.56 0.55 65.9 2000 DPS 100 yr. 2200.00 7214.69 7219.73 4.68 2.75 7219.77 0.02097 4.12 3.47 527.09 189.99 0.55 65.9 1900 DPS 100 yr. 2200.00 7214.69 7219.35 4.66 2.76 7217.78 0.02097 4.12 3.47 527.09 189.99 0.55 65.9 1900 DPS 100 yr. 210 yr. 2200.00 7214.69 7219.35 4.57 2.69 7217.48 0.02490 3.97 4.17 5.72 6.72 6.72 6.72 6.72 6.72 6.72 6.72 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 200 FEMA 100 yr. 2800.00 7218.65 7224.66 6.01 3.28 7225.61 0.027276 5.20 5.53 409.67 142.79 0.55 SC-9 2000 DBPS 100 yr. 2170.00 7218.65 7224.66 6.01 3.28 7225.61 0.027276 5.20 5.53 409.67 142.79 0.55 SC-9 2100 DBPS 100 yr. 2170.00 7218.61 7222.21 5.34 2.92 7222.88 0.030918 4.89 5.34 443.36 134.70 0.55 SC-9 2100 DBPS 100 yr. 2170.00 7216.91 7222.21 5.34 2.92 7222.80 0.030918 4.89 5.64 531.22 180.50 0.55 SC-9 2000 DBPS 100 yr. 2170.00 7216.91 7221.82 4.95 2.66 7222.55 0.031233 4.71 5.22 461.14 171.07 0.55 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.73 5.53 2.98 7220.17 0.020631 4.37 3.87 565.52 188.58 0.55 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 721.97 0.020631 4.37 3.87 565.52 188.58 0.55 SC-9 1900 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 721.97 0.020631 4.37 3.87 565.52 188.58 0.55 SC-9 1900 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 721.97 0.020631 4.37 3.87 565.52 188.58 0.55 SC-9 1900 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 721.97 0.020631 4.37 3.87 565.52 188.58 0.55 SC-9 1900 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 721.97 0.020631 4.37 3.37 565.52 188.58 0.55 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.58 4.95 3.01 7217.88 0.023799 4.17 4.47 624.16 206.61 0.44 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.50 4.57 2.69 7217.48 0.024899 3.37 4.17 547.21 202.26 0.45 SC-9 1900 DBPS 100 yr. 2170.00 7210.76 7215.93 5.51 5.58 3.71 7210.47 0.009019 2.86 2.90 90.63 2.43.13 0.22 SC-9 1900 DBPS 100 yr. 2170.00 720.76 7215.93 5.51 5.59 3.77 7213.44 0.02045 4.22 3.67 514.00 T17.55 0.55 SC-9 1900 DBPS 100 yr. 2170.00 720.74 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.55 665.12 172.43 0.44 SC-9 1900 DBPS 100 yr. 2170.00 720.74 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.55 665.12 172.43 0.44 SC-9 1900 DBPS 100 yr. 2170.00 720.74 7213.11 5.69 5.78 5.79 5.79 1.79 1.79 1.79 0.00905 2.26 1.49 97.68 5.79 1.79 0.00905 2.26 1.49 97.68 5.79 1.79 0.00905 2.26 1.49 97.68 5.79 1.79 0.00905 2.26 1.49 97.68 5.79 1.79 0.00 1.70 1.70 1.70 1.70 1.70 1.70 1.70                                                       | SC-9      | 2300          | FEMA 100 yr.    | 2600.00    | 7220.00   | 7227.09   |           | 7.09         | 4.22        | 7227.33   | 0.011823   | 3.66      | 3.12        | 710.81    | 166.69    | 0.33        |
| SC-9 2000 DBPS 100 yr. 2170.00 7218.65 7224.66 6.01 3.28 7225.14 0.028113 4.88 5.34 443.36 134.70 0.5 SC-9 2100 DBPS 100 yr. 2170.00 7218.91 7222.21 5.34 2.92 7222.88 0.039316 4.89 5.54 531.22 180.50 0.5 SC-9 2100 DBPS 100 yr. 2170.00 7218.91 7222.82 4.95 2.88 7222.25 0.031238 4.71 5.22 441.14 171.07 0.5 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.73 5.03 2.99 7220.17 0.020811 4.37 3.87 5865.22 198.58 0.5 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.73 4.68 2.75 7219.73 0.020107 4.12 3.47 527.00 189.39 0.5 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.58 4.95 3.01 7217.88 0.02379 4.17 4.47 624.18 206.61 0.44 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.20 4.57 2.89 7217.74 0.020107 4.12 3.47 527.00 189.39 0.5 SC-9 1900 DBPS 100 yr. 2170.00 7210.65 7216.34 5.58 3.71 7216.47 0.039019 2.86 2.09 908.63 243.13 0.22 SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.33 5.17 3.34 7216.05 0.009117 2.68 1.00 800.6 244.13 0.26 SC-9 1700 FEMA 100 yr. 2600.00 7208.98 7214.69 5.71 3.34 7216.05 0.009117 2.08 1.00 800.6 244.13 0.26 SC-9 1700 FEMA 100 yr. 2170.00 7208.98 7214.69 5.71 3.20 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 FEMA 100 yr. 2170.00 7208.98 7214.69 5.71 3.20 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 FEMA 100 yr. 2170.00 7208.98 7214.69 5.71 3.20 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.59 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.59 2.93 7215.18 0.00406 2.58 1.42 1008.13 2.00.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.59 2.93 7215.18 0.00406 2.58 1.42 1008.13 2.00.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7204.98 7211.34 6.38 6.71 721.28 0.00406 2.55 1.44 5.94 5.95 5.9                | SC-9      | 2300          | DBPS 100 yr.    | 2170.00    | 7220.00   | 7226.59   |           | 6.59         | 3.95        | 7226.80   | 0.011472   | 3.45      | 2.83        | 629.83    | 157.86    | 0.32        |
| SC-9 2000 DBPS 100 yr. 2170.00 7218.65 7224.66 6.01 3.28 7225.14 0.028113 4.88 5.34 443.36 134.70 0.5 SC-9 2100 DBPS 100 yr. 2170.00 7218.91 7222.21 5.34 2.92 7222.88 0.039316 4.89 5.54 531.22 180.50 0.5 SC-9 2100 DBPS 100 yr. 2170.00 7218.91 7222.82 4.95 2.88 7222.25 0.031238 4.71 5.22 441.14 171.07 0.5 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.73 5.03 2.99 7220.17 0.020811 4.37 3.87 5865.22 198.58 0.5 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.73 4.68 2.75 7219.73 0.020107 4.12 3.47 527.00 189.39 0.5 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.58 4.95 3.01 7217.88 0.02379 4.17 4.47 624.18 206.61 0.44 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.20 4.57 2.89 7217.74 0.020107 4.12 3.47 527.00 189.39 0.5 SC-9 1900 DBPS 100 yr. 2170.00 7210.65 7216.34 5.58 3.71 7216.47 0.039019 2.86 2.09 908.63 243.13 0.22 SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.33 5.17 3.34 7216.05 0.009117 2.68 1.00 800.6 244.13 0.26 SC-9 1700 FEMA 100 yr. 2600.00 7208.98 7214.69 5.71 3.34 7216.05 0.009117 2.08 1.00 800.6 244.13 0.26 SC-9 1700 FEMA 100 yr. 2170.00 7208.98 7214.69 5.71 3.20 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 FEMA 100 yr. 2170.00 7208.98 7214.69 5.71 3.20 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 FEMA 100 yr. 2170.00 7208.98 7214.69 5.71 3.20 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.59 2.93 7215.18 0.019024 4.43 4.00 587.46 177.55 0.55 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.59 2.93 7215.18 0.00406 2.58 1.42 1008.13 2.00.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7214.27 5.59 2.93 7215.18 0.00406 2.58 1.42 1008.13 2.00.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7204.98 7211.34 6.38 6.71 721.28 0.00406 2.55 1.44 5.94 5.95 5.9                |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 2100 FEMA 100 yr. 2600.00 7216.91 7222.21 5.34 2.92 722.28 0.030918 4.89 5.54 551.22 180.50 0.55 SC-9 2100 DBPS 100 yr. 2170.00 7216.91 7221.82 4.95 2.68 7222.25 0.031238 4.71 5.22 461.14 171.07 0.55 SC-9 2000 FEMA 100 yr. 2600.00 7214.69 7219.37 5.03 2.98 7220.17 0.020851 4.37 3.87 595.52 198.58 0.55 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 7219.77 0.020167 4.12 3.47 527.09 189.99 0.55 SC-9 1800 FEMA 100 yr. 2600.00 7212.63 7217.88 4.95 3.01 7217.88 0.023799 4.17 4.47 624.18 624.18 624.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.18 625.                | SC-9      | 2200          | FEMA 100 yr.    | 2600.00    | 7218.65   | 7225.07   |           | 6.42         | 3.48        | 7225.61   | 0.027276   | 5.20      | 5.93        | 499.67    | 142.79    | 0.56        |
| SC-9 2000 FEMA 100 yr. 260.00 7214.69 7219.73 5.03 2.98 7220.17 0.020831 4.71 5.22 461.14 171.07 0.55 SC-9 2000 DBPS 100 yr. 270.00 7214.69 7219.37 5.03 2.98 7220.17 0.020831 4.37 3.87 595.52 198.58 0.55 SC-9 1900 FEMA 100 yr. 260.00 7214.69 7219.37 4.68 2.75 7219.77 0.020197 4.12 3.47 527.09 189.99 0.55 SC-9 1900 DBPS 100 yr. 270.00 7212.63 7217.56 4.95 3.01 7217.88 0.024309 4.17 4.47 624.18 206.61 0.48 SC-9 1900 DBPS 100 yr. 270.00 7212.63 7217.50 4.55 2.69 7217.48 0.024309 3.97 4.17 5.72 1202.26 0.44 SC-9 1800 FEMA 100 yr. 260.00 7210.76 7215.83 5.17 3.84 7216.05 0.009117 2.88 1.90 809.63 243.13 0.22 SC-9 1800 DBPS 100 yr. 2170.00 7212.69 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7207.41 7212.56 5.51 3.32 7212.48 0.016508 3.87 3.35 655.12 172.43 0.45 SC-9 1800 DBPS 100 yr. 2600.00 7207.41 7212.56 5.51 3.32 7212.48 0.016508 3.80 3.40 561.57 107.80 0.44 SC-9 1500 DBPS 100 yr. 2600.00 7207.44 7212.56 5.51 5.33 72712.49 0.005072 2.46 1.44 801.55 200.55 0.22 SC-9 1500 DBPS 100 yr. 270.00 7207.41 7212.56 5.51 5.37 1271.00 0.005072 2.46 1.49 976.83 199.08 0.22 SC-9 1500 DBPS 100 yr. 270.00 7207.41 7212.56 7.91 5.87 4.22 7211.99 0.005072 2.46 1.49 976.83 199.08 0.22 SC-9 1500 DBPS 100 yr. 270.00 7207.41 7212.68 7.93 5.84 7212.18 0.004897 2.66 1.49 976.83 199.08 0.22 SC-9 1400 DBPS 100 yr. 270.00 7207.41 7212.68 7.93 5.84 7212.18 0.00656 2.55 1.41 8.49 45 195.59 0.22 SC-9 1400 DBPS 100 yr. 270.00 7207.41 7212.68 7.93 5.44 7212.80 0.005072 2.46 1.44 89.45 195.59 0.22 SC-9 1400 DBPS 100 yr. 270.00 720.49 721.94 721.56 7.93 5.44 721.52 0.007407 3.46 2.33 752.                | SC-9      | 2200          | DBPS 100 yr.    | 2170.00    | 7218.65   | 7224.66   |           | 6.01         | 3.28        | 7225.14   | 0.026113   | 4.89      | 5.34        | 443.36    | 134.70    | 0.54        |
| SC-9 2000 FEMA 100 yr. 260.00 7214.69 7219.73 5.03 2.98 7220.17 0.020831 4.71 5.22 461.14 171.07 0.55 SC-9 2000 DBPS 100 yr. 270.00 7214.69 7219.37 5.03 2.98 7220.17 0.020831 4.37 3.87 595.52 198.58 0.55 SC-9 1900 FEMA 100 yr. 260.00 7214.69 7219.37 4.68 2.75 7219.77 0.020197 4.12 3.47 527.09 189.99 0.55 SC-9 1900 DBPS 100 yr. 270.00 7212.63 7217.56 4.95 3.01 7217.88 0.024309 4.17 4.47 624.18 206.61 0.48 SC-9 1900 DBPS 100 yr. 270.00 7212.63 7217.50 4.55 2.69 7217.48 0.024309 3.97 4.17 5.72 1202.26 0.44 SC-9 1800 FEMA 100 yr. 260.00 7210.76 7215.83 5.17 3.84 7216.05 0.009117 2.88 1.90 809.63 243.13 0.22 SC-9 1800 DBPS 100 yr. 2170.00 7212.69 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 1177.55 0.55 SC-9 1800 DBPS 100 yr. 2170.00 7207.41 7212.56 5.51 3.32 7212.48 0.016508 3.87 3.35 655.12 172.43 0.45 SC-9 1800 DBPS 100 yr. 2600.00 7207.41 7212.56 5.51 3.32 7212.48 0.016508 3.80 3.40 561.57 107.80 0.44 SC-9 1500 DBPS 100 yr. 2600.00 7207.44 7212.56 5.51 5.33 72712.49 0.005072 2.46 1.44 801.55 200.55 0.22 SC-9 1500 DBPS 100 yr. 270.00 7207.41 7212.56 5.51 5.37 1271.00 0.005072 2.46 1.49 976.83 199.08 0.22 SC-9 1500 DBPS 100 yr. 270.00 7207.41 7212.56 7.91 5.87 4.22 7211.99 0.005072 2.46 1.49 976.83 199.08 0.22 SC-9 1500 DBPS 100 yr. 270.00 7207.41 7212.68 7.93 5.84 7212.18 0.004897 2.66 1.49 976.83 199.08 0.22 SC-9 1400 DBPS 100 yr. 270.00 7207.41 7212.68 7.93 5.84 7212.18 0.00656 2.55 1.41 8.49 45 195.59 0.22 SC-9 1400 DBPS 100 yr. 270.00 7207.41 7212.68 7.93 5.44 7212.80 0.005072 2.46 1.44 89.45 195.59 0.22 SC-9 1400 DBPS 100 yr. 270.00 720.49 721.94 721.56 7.93 5.44 721.52 0.007407 3.46 2.33 752.                |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 2000 FEMA 100 yr. 2600.00 7214.69 7219.73 5.03 2.98 720.17 0.020831 4.37 3.87 595.52 198.58 0.55 SC-9 2000 DBPS 100 yr. 2170.00 7214.69 7219.37 4.68 2.75 7219.77 0.020197 4.12 3.47 527.09 189.99 0.55 SC-9 1900 FEMA 100 yr. 2600.00 7212.63 7217.58 4.95 3.01 7217.88 0.023799 4.17 4.47 624.18 206.61 0.44 SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.00 4.57 2.69 7217.48 0.024809 3.97 4.17 547.21 202.26 0.44 SC-9 1800 DBPS 100 yr. 2170.00 7212.63 7217.59 5.58 3.71 7216.47 0.009019 2.86 2.09 908.63 243.13 0.23 SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.39 5.17 3.34 7216.05 0.009117 2.68 1.90 809.63 243.13 0.23 SC-9 1700 DBPS 100 yr. 2600.00 7208.98 7214.69 5.51 3.29 7215.18 0.019524 4.43 4.00 587.45 177.55 0.55 SC-9 1700 DBPS 100 yr. 2600.00 7208.98 7214.67 5.59 5.71 3.29 7215.40 0.019524 4.43 4.00 587.45 177.55 0.55 SC-9 1600 DBPS 100 yr. 2600.00 7208.98 7214.67 5.59 5.71 3.29 7215.40 0.019524 4.43 4.00 587.45 177.55 0.55 SC-9 1600 DBPS 100 yr. 2700.0 7208.98 7214.67 5.59 5.51 3.29 7215.40 0.019524 4.43 4.00 587.45 177.55 0.55 SC-9 1600 DBPS 100 yr. 2700.0 7208.98 7214.67 5.59 5.50 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.44 SC-9 1600 DBPS 100 yr. 2700.0 7208.98 7214.67 5.59 5.50 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.44 SC-9 1500 FEMA 100 yr. 2600.00 7208.49 7211.87 5.58 5.87 4.22 7211.99 0.009072 2.46 1.14 881.05 206.53 0.24 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7211.26 5.58 5.57 4.22 7211.99 0.009072 2.46 1.14 881.05 206.53 0.24 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7211.34 6.68 6.48 4.76 7212.61 0.004766 2.58 1.14 1008.13 209.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7211.34 6.68 6.48 4.76 7212.61 0.004766 2.58 1.14 1008.13 209.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7211.34 6.68 6.48 4.76 7212.61 0.004766 2.58 1.14 1008.13 209.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7211.34 6.68 6.48 4.76 7212.61 0.004766 2.58 1.14 1008.13 209.34 0.22 SC-9 1500 DBPS 100 yr. 2170.00 7208.98 7211.34 6.68 6.48 4.76 7212.61 0.004766 2.58 1.14 1008.13 80.00 1.20 1.20 1.20 1.20 1.20 1.20 1.20                | SC-9      | 2100          | FEMA 100 yr.    | 2600.00    | 7216.91   | 7222.21   |           | 5.34         | 2.92        | 7222.68   | 0.030918   | 4.89      | 5.64        | 531.22    | 180.50    | 0.56        |
| SC-9 1900   DBPS 100 yr.   2170.00   7214.69   7219.37     4.88   2.75   7219.77   0.020197   4.12   3.47   527.00   189.99   0.55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SC-9      | 2100          | DBPS 100 yr.    | 2170.00    | 7216.91   | 7221.82   |           | 4.95         | 2.68        | 7222.25   | 0.031233   | 4.71      | 5.22        | 461.14    | 171.07    | 0.57        |
| SC-9 1900   DBPS 100 yr.   2170.00   7214.69   7219.37     4.88   2.75   7219.77   0.020197   4.12   3.47   527.00   189.99   0.55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1900 FEMA 100 yr. 2600.00 7212.63 7217.58 4.95 3.01 7217.88 0.023799 4.17 4.47 624.18 206.61 0.44   SC-9 1900 DBPS 100 yr. 2170.00 7212.63 7217.20 4.57 2.69 7217.48 0.024609 3.97 4.17 547.21 202.26 0.44   SC-9 1800 FEMA 100 yr. 2600.00 7210.76 7216.34 5.58 3.71 7216.47 0.009019 2.86 2.09 908.63 243.13 0.24   SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.93 5.17 3.34 7216.05 0.009117 2.68 1.90 809.63 243.13 0.24   SC-9 1700 FEMA 100 yr. 2600.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 177.55 0.55   SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.55   SC-9 1600 FEMA 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.44   SC-9 1500 DBPS 100 yr. 2170.00 7208.04 7212.48 6.48 4.76 7212.68 0.01666 3.86 3.46 561.57 167.86 0.44   SC-9 1500 DBPS 100 yr. 2600.00 7204.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.24   SC-9 1400 DBPS 100 yr. 2600.00 7204.06 721.14 6.33 4.31 7211.48 0.00508 3.97 3.53 655.12 172.43 0.24   SC-9 1400 DBPS 100 yr. 2600.00 7204.06 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.00 0.24   SC-9 1400 DBPS 100 yr. 2600.00 7204.06 721.14 6.33 4.31 7211.48 0.005056 2.55 1.41 849.45 195.59 0.22   SC-9 1300 DBPS 100 yr. 2600.00 720.94 7212.64 6.33 4.31 7211.48 0.005056 2.55 1.41 849.45 195.59 0.22   SC-9 1300 DBPS 100 yr. 2600.00 720.96 721.14 6.33 4.31 7211.48 0.005056 2.55 1.41 849.45 195.59 0.22   SC-9 1300 DBPS 100 yr. 2600.00 720.96 721.15 721.05 7.03 4.66 721.23 0.004897 2.66 1.49 976.83 199.00 0.25   SC-9 1300 DBPS 100 yr. 2600.00 720.97 721.58 6.71 4.48 7210.65 0.006138 3.20 2.25 811.55 148.48 0.25   SC-9 1300 DBPS 100 yr. 2600.00 720.98 7210.58 6.71 4.48 7210.85 0.006138 3.20 2.25 811.55 148.48 0.25   SC-9 1300 DBPS 100 yr. 2600.00 720.98 7210.58 6.71 4.48 7210.55 0.006138 3.20 2.25 811.55 148.48 0.25   SC-9 1300 DBPS 100 yr. 2600.00 720.98 7210.58 6.71 4.48 7210.55 0.006138 3.20 2.55 811.55 148.48 0.25   SC-9 1300 DBPS 100 yr. 2600.00 720.98 7210.58 7210.58 6.71                 | SC-9      | 2000          | FEMA 100 yr.    | 2600.00    | 7214.69   | 7219.73   |           | 5.03         | 2.98        | 7220.17   | 0.020831   | 4.37      | 3.87        | 595.52    | 198.58    | 0.54        |
| SC-9 1800 DBPS 100 yr. 260.00 7210.76 7216.34 7217.20 4.57 2.69 7217.48 0.024809 3.97 4.17 547.21 202.26 0.44   SC-9 1800 FEMA 100 yr. 260.00 7210.76 7216.34 5.58 3.71 7216.47 0.009019 2.86 2.09 908.63 243.13 0.21   SC-9 1700 FEMA 100 yr. 2600.00 7208.98 7214.89 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 177.55 0.55   SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.55   SC-9 1800 DBPS 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.44   SC-9 1800 DBPS 100 yr. 2170.00 7208.04 7212.48 6.48 4.76 7212.81 0.004766 2.58 1.42 1008.13 209.34 0.22   SC-9 1800 DBPS 100 yr. 2170.00 7208.04 7211.87 5.83 4.22 7211.99 0.005072 2.46 1.34 889.5 1.90 809.63 241.35 0.24   SC-9 1400 DBPS 100 yr. 2600.00 7208.44 7211.99 7.03 4.86 7212.13 0.004766 2.58 1.42 1008.13 209.34 0.22   SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.19 0.004766 2.58 1.42 1008.13 209.34 0.22   SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.19 0.004766 2.55 1.44 849.45 195.00 0 SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 876.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.92 7.03 7.03 4.86 7212.13 0.004897 2.66 1.49 876.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.92 7.03 7.03 4.86 7212.13 0.004897 3.26 1.49 876.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.92 7.03 7.03 4.86 721.13 0.004897 3.32 2.21 653.32 143.55 0.33   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.96 7.73 5.34 721.98 0.006843 3.03 1.87 715.53 136.21 0.28   SC-9 1200 DBPS 100 yr. 2170.00 720.91 721.92 7.00 720.91 721.95 0.006843 3.00 3.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.99 7.00 5.91 720.99 7.00 5.13 7210.15 0.006843 3.00 3.03 1.87 715.53 136.21 0.28   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.94 7.70 720.99 7.00 5.13 720.99 0.013385 4.52 3.67 575.49 129                | SC-9      | 2000          | DBPS 100 yr.    | 2170.00    | 7214.69   | 7219.37   |           | 4.68         | 2.75        | 7219.77   | 0.020197   | 4.12      | 3.47        | 527.09    | 189.99    | 0.53        |
| SC-9 1800 DBPS 100 yr. 260.00 7210.76 7216.34 7217.20 4.57 2.69 7217.48 0.024809 3.97 4.17 547.21 202.26 0.44   SC-9 1800 FEMA 100 yr. 260.00 7210.76 7216.34 5.58 3.71 7216.47 0.009019 2.86 2.09 908.63 243.13 0.21   SC-9 1700 FEMA 100 yr. 2600.00 7208.98 7214.89 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 177.55 0.55   SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.55   SC-9 1800 DBPS 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.44   SC-9 1800 DBPS 100 yr. 2170.00 7208.04 7212.48 6.48 4.76 7212.81 0.004766 2.58 1.42 1008.13 209.34 0.22   SC-9 1800 DBPS 100 yr. 2170.00 7208.04 7211.87 5.83 4.22 7211.99 0.005072 2.46 1.34 889.5 1.90 809.63 241.35 0.24   SC-9 1400 DBPS 100 yr. 2600.00 7208.44 7211.99 7.03 4.86 7212.13 0.004766 2.58 1.42 1008.13 209.34 0.22   SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.19 0.004766 2.58 1.42 1008.13 209.34 0.22   SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.19 0.004766 2.55 1.44 849.45 195.00 0 SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 7208.04 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 876.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.92 7.03 7.03 4.86 7212.13 0.004897 2.66 1.49 876.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.92 7.03 7.03 4.86 7212.13 0.004897 3.26 1.49 876.83 199.08 0.22   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.92 7.03 7.03 4.86 721.13 0.004897 3.32 2.21 653.32 143.55 0.33   SC-9 1400 DBPS 100 yr. 2170.00 720.91 721.96 7.73 5.34 721.98 0.006843 3.03 1.87 715.53 136.21 0.28   SC-9 1200 DBPS 100 yr. 2170.00 720.91 721.92 7.00 720.91 721.95 0.006843 3.00 3.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.99 7.00 5.91 720.99 7.00 5.13 7210.15 0.006843 3.00 3.03 1.87 715.53 136.21 0.28   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.94 7.70 720.99 7.00 5.13 720.99 0.013385 4.52 3.67 575.49 129                |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1800 DBPS 100 yr. 2600.00 7210.76 7216.34 5.58 3.71 7216.47 0.009019 2.86 2.09 908.63 243.13 0.21   SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.93 5.517 3.34 7216.05 0.099117 2.88 1.99 809.63 241.35 0.22   SC-9 1700 DBPS 100 yr. 2600.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 177.55 0.55   SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.55   SC-9 1600 DBPS 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.44   SC-9 1600 DBPS 100 yr. 2170.00 7207.41 7212.66 5.15 3.32 7212.88 0.016666 3.86 3.46 561.57 167.86 0.44   SC-9 1500 DBPS 100 yr. 2600.00 7207.41 721.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.22   SC-9 1500 DBPS 100 yr. 2600.00 7204.96 7211.97 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.22   SC-9 1400 DBPS 100 yr. 2600.00 7204.96 7211.94 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 DBPS 100 yr. 270.00 7204.96 7211.94 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 DBPS 100 yr. 270.00 7203.87 7210.58 6.71 4.48 7210.83 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 270.00 7203.87 7210.58 6.71 4.48 7210.83 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 270.00 7203.87 7210.58 6.71 4.48 7210.83 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1200 DBPS 100 yr. 270.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.22   SC-9 1200 DBPS 100 yr. 270.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.22   SC-9 1200 DBPS 100 yr. 270.00 7202.91 720.997 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.24   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 720.997 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.24   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 720.94 720.94 720.95 0.01388 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 720.94 720.94 720.95 0.01388 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 720.94 720.94 720.95 0.01388 4.                | SC-9      | 1900          | FEMA 100 yr.    | 2600.00    | 7212.63   | 7217.58   |           | 4.95         | 3.01        | 7217.88   | 0.023799   | 4.17      | 4.47        | 624.18    | 206.61    | 0.45        |
| SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.93 5.17 3.34 7216.05 0.009117 2.68 1.90 809.63 241.35 0.28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SC-9      | 1900          | DBPS 100 yr.    | 2170.00    | 7212.63   | 7217.20   |           | 4.57         | 2.69        | 7217.48   | 0.024809   | 3.97      | 4.17        | 547.21    | 202.26    | 0.45        |
| SC-9 1800 DBPS 100 yr. 2170.00 7210.76 7215.93 5.17 3.34 7216.05 0.009117 2.68 1.90 809.63 241.35 0.28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1700 FEMA 100 yr. 2600.00 7208.98 7214.69 5.71 3.29 7215.18 0.019524 4.43 4.00 587.45 177.55 0.55   SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.56   SC-9 1600 FEMA 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.45   SC-9 1600 DBPS 100 yr. 2170.00 7207.41 7212.66 5.15 3.32 7212.88 0.016666 3.86 3.46 561.57 167.86 0.44   SC-9 1500 FEMA 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.25   SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.26   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.25   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 844.5 195.59 0.25   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7212.68 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.35   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.68 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.35   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.94 720.99 7 7.06 5.13 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.94 720.99 7 7.06 5.13 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 720.91 720.94 720.99 7 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 720.15 720.94 720.94 7.58 4.39 720.99 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 720.15 720.94 720.94 7.58 4.39 720.99 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 720.15 720.94 720.94 720.94 720.99 7 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 720.15 720.94 720.94 720.94 720.94 720.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 720.15 720.94 720.94 720.94 720.94 720.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 720.15 720.94 720.94 720.94 720.94 720.94 720.94 720.94 720.94                 | SC-9      | 1800          | FEMA 100 yr.    | 2600.00    | 7210.76   | 7216.34   |           | 5.58         | 3.71        | 7216.47   | 0.009019   | 2.86      | 2.09        | 908.63    | 243.13    | 0.26        |
| SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.56   SC-9 1600 DBPS 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.66 3.46 561.57 167.86 0.44   SC-9 1500 FEMA 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.25   SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.25   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.25   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 7.39 5.04 7211.82 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.5                | SC-9      | 1800          | DBPS 100 yr.    | 2170.00    | 7210.76   | 7215.93   |           | 5.17         | 3.34        | 7216.05   | 0.009117   | 2.68      | 1.90        | 809.63    | 241.35    | 0.26        |
| SC-9 1700 DBPS 100 yr. 2170.00 7208.98 7214.27 5.29 2.93 7214.74 0.020045 4.22 3.67 514.00 174.36 0.56   SC-9 1600 DBPS 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.66 3.46 561.57 167.86 0.44   SC-9 1500 FEMA 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.25   SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.25   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.25   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 7.39 5.04 7211.82 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.5                |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1600 FEMA 100 yr. 2600.00 7207.41 7213.11 5.69 3.77 7213.44 0.015008 3.97 3.53 655.12 172.43 0.45 SC-9 1600 DBPS 100 yr. 2170.00 7207.41 7212.56 5.15 3.32 7212.88 0.016666 3.86 3.46 561.57 167.86 0.44 SC-9 1500 DBPS 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.25 SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.25 SC-9 1400 DBPS 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.25 SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25 SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33 SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33 SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.25 SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26 SC-9 1100 FEMA 100 yr. 2600.00 7203.87 7210.94 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7203.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.                | SC-9      | 1700          | FEMA 100 yr.    | 2600.00    | 7208.98   | 7214.69   |           | 5.71         | 3.29        | 7215.18   | 0.019524   | 4.43      | 4.00        | 587.45    | 177.55    | 0.55        |
| SC-9 1500 DBPS 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.20   SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.20   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.20   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.20   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.20   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.20   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.5                | SC-9      | 1700          | DBPS 100 yr.    | 2170.00    | 7208.98   | 7214.27   |           | 5.29         | 2.93        | 7214.74   | 0.020045   | 4.22      | 3.67        | 514.00    | 174.36    | 0.56        |
| SC-9 1500 DBPS 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.20   SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.20   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.20   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.20   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.20   SC-9 1100 FEMA 100 yr. 2600.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.20   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.45   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.5                |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1500 FEMA 100 yr. 2600.00 7206.04 7212.48 6.48 4.76 7212.61 0.004766 2.58 1.42 1008.13 209.34 0.23   SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.24   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.24   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.23   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.24   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.24   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.01385 4.52 3.67 575.49 129.29 0.44   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209                | SC-9      | 1600          | FEMA 100 yr.    | 2600.00    | 7207.41   | 7213.11   |           | 5.69         | 3.77        | 7213.44   | 0.015008   | 3.97      | 3.53        | 655.12    | 172.43    | 0.42        |
| SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.24   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.24   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SC-9      | 1600          | DBPS 100 yr.    | 2170.00    | 7207.41   | 7212.56   |           | 5.15         | 3.32        | 7212.88   | 0.016666   | 3.86      | 3.46        | 561.57    | 167.86    | 0.44        |
| SC-9 1500 DBPS 100 yr. 2170.00 7206.04 7211.87 5.87 4.22 7211.99 0.005072 2.46 1.34 881.05 206.53 0.24   SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.24   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1400 FEMA 100 yr. 2600.00 7204.96 7211.99 7.03 4.86 7212.13 0.004897 2.66 1.49 976.83 199.08 0.24   SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.25   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | SC-9      | 1500          | FEMA 100 yr.    | 2600.00    | 7206.04   | 7212.48   |           | 6.48         |             | 7212.61   | 0.004766   | 2.58      | 1.42        | 1008.13   | 209.34    | 0.23        |
| SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.35   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.35   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.25   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.25   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | SC-9      | 1500          | DBPS 100 yr.    | 2170.00    | 7206.04   | 7211.87   |           | 5.87         | 4.22        | 7211.99   | 0.005072   | 2.46      | 1.34        | 881.05    | 206.53    | 0.24        |
| SC-9 1400 DBPS 100 yr. 2170.00 7204.96 7211.34 6.38 4.31 7211.48 0.005256 2.55 1.41 849.45 195.59 0.25   SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.35   SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.35   SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.25   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.25   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1300 FEMA 100 yr. 2600.00 7203.87 7211.26 7.39 5.04 7211.52 0.007407 3.46 2.33 752.09 146.65 0.33 SC-9 1300 DBPS 100 yr. 2170.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33 SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.28 SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26 SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SC-9      |               | FEMA 100 yr.    |            | 7204.96   | 7211.99   |           | 7.03         |             |           | 0.004897   |           |             | 976.83    | 199.08    | 0.24        |
| SC-9 1200 FEMA 100 yr. 2600.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 DBPS 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SC-9      | 1400          | DBPS 100 yr.    | 2170.00    | 7204.96   | 7211.34   |           | 6.38         | 4.31        | 7211.48   | 0.005256   | 2.55      | 1.41        | 849.45    | 195.59    | 0.25        |
| SC-9 1200 FEMA 100 yr. 2600.00 7203.87 7210.58 6.71 4.48 7210.83 0.007901 3.32 2.21 653.32 143.55 0.33   SC-9 1200 DBPS 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.26   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1200 FEMA 100 yr. 2600.00 7202.91 7210.64 7.73 5.34 7210.85 0.006138 3.20 2.05 811.55 148.48 0.28   SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SC-9      | 1300          | FEMA 100 yr.    | 2600.00    | 7203.87   | 7211.26   |           | 7.39         | 5.04        | 7211.52   | 0.007407   |           |             | 752.09    | 146.65    | 0.32        |
| SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | SC-9      | 1300          | DBPS 100 yr.    | 2170.00    | 7203.87   | 7210.58   |           | 6.71         | 4.48        | 7210.83   | 0.007901   | 3.32      | 2.21        | 653.32    | 143.55    | 0.33        |
| SC-9 1200 DBPS 100 yr. 2170.00 7202.91 7209.97 7.06 5.13 7210.15 0.005843 3.03 1.87 715.53 136.21 0.26   SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1100 FEMA 100 yr. 2600.00 7201.85 7209.43 7.58 4.39 7209.95 0.013385 4.52 3.67 575.49 129.29 0.48                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SC-9      | 1200          | FEMA 100 yr.    | 2600.00    | 7202.91   | 7210.64   |           | 7.73         | 5.34        | 7210.85   | 0.006138   | 3.20      | 2.05        | 811.55    | 148.48    | 0.28        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | SC-9      | 1200          | DBPS 100 yr.    | 2170.00    | 7202.91   | 7209.97   |           | 7.06         | 5.13        | 7210.15   | 0.005843   | 3.03      | 1.87        | 715.53    | 136.21    | 0.26        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9 1100 DBPS 100 yr. 2170.00 7201.85 7208.76 6.91 4.05 7209.26 0.014009 4.41 3.55 492.17 119.82 0.49                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | SC-9      | 1100          | FEMA 100 yr.    | 2600.00    | 7201.85   | 7209.43   |           | 7.58         | 4.39        | 7209.95   | 0.013385   | 4.52      | 3.67        | 575.49    | 129.29    | 0.49        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | SC-9      | 1100          | DBPS 100 yr.    | 2170.00    | 7201.85   | 7208.76   |           | 6.91         | 4.05        | 7209.26   | 0.014009   | 4.41      | 3.55        | 492.17    | 119.82    | 0.49        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |           |               |                 |            |           |           |           |              |             |           |            |           |             |           |           |             |

HEC-RAS Plan: Proposed Con River: SAND CREEK Reach: SC-9 (Continued)

| Reach | River Sta | Profile       | Q Total | Min Ch El | W.S. Elev | Crit W.S. | Max Chl Dpth | Hydr Radius | E.G. Elev | E.G. Slope | Vel Total | Shear Total | Flow Area | Top Width | Froude # XS |
|-------|-----------|---------------|---------|-----------|-----------|-----------|--------------|-------------|-----------|------------|-----------|-------------|-----------|-----------|-------------|
|       |           |               | (cfs)   | (ft)      | (ft)      | (ft)      | (ft)         | (ft)        | (ft)      | (ft/ft)    | (ft/s)    | (lb/sq ft)  | (sq ft)   | (ft)      |             |
| SC-9  | 1000      | FEMA 100 yr.  | 2600.00 | 7199.76   | 7207.72   |           | 7.96         | 4.91        | 7208.40   | 0.018085   | 5.44      | 5.55        | 478.22    | 94.69     | 0.52        |
| SC-9  | 1000      | DBPS 100 yr.  | 2170.00 | 7199.76   | 7207.08   |           | 7.32         | 4.61        | 7207.69   | 0.017687   | 5.17      | 5.09        | 419.69    | 88.56     | 0.51        |
|       |           |               |         |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9  | 900       | FEMA 100 yr.  | 2600.00 | 7198.85   | 7205.88   |           | 7.03         | 5.01        | 7206.64   | 0.017409   | 5.68      | 5.45        | 457.84    | 89.09     | 0.54        |
| SC-9  | 900       | DBPS 100 yr.  | 2170.00 | 7198.85   | 7205.32   |           | 6.47         | 4.63        | 7205.98   | 0.016810   | 5.31      | 4.86        | 408.42    | 86.16     | 0.53        |
| SC-9  | 800       | FEMA 100 yr.  | 2600.00 | 7197.87   | 7204.35   |           | 6.48         | 4.58        | 7205.27   | 0.010887   | 4.59      | 3.11        | 566.29    | 121.26    | 0.63        |
| SC-9  | 800       | DBPS 100 yr.  | 2170.00 | 7197.87   | 7203.78   |           | 5.91         | 4.13        | 7204.62   | 0.011068   | 4.36      | 2.86        | 497.86    | 118.32    | 0.63        |
|       |           |               |         |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9  | 700       | FEMA 100 yr.  | 2600.00 | 7195.42   | 7202.02   | 7202.02   | 6.60         | 3.92        | 7203.92   | 0.015124   | 5.84      | 3.70        | 445.18    | 112.09    | 0.98        |
| SC-9  | 700       | DBPS 100 yr.  | 2170.00 | 7195.42   | 7201.54   | 7201.54   | 6.12         | 3.53        | 7203.27   | 0.014979   | 5.55      | 3.30        | 391.16    | 109.62    | 0.99        |
| SC-9  | 600       | FEMA 100 yr.  | 2600.00 | 7193.19   | 7199.52   |           | 6.33         | 4.27        | 7200.00   | 0.022874   | 5.22      | 6.09        | 498.27    | 115.09    | 0.47        |
| SC-9  | 600       | DBPS 100 yr.  | 2170.00 | 7193.19   | 7199.01   |           | 5.82         | 3.88        | 7199.44   | 0.022996   | 4.92      | 5.57        | 440.84    | 112.19    | 0.47        |
|       |           | ·             |         |           |           |           |              |             |           |            |           |             |           |           |             |
| SC-9  | 500       | FEMA 100 yr.  | 2600.00 | 7190.84   | 7197.39   |           | 6.55         | 4.32        | 7197.79   | 0.021112   | 4.90      | 5.70        | 530.27    | 120.86    | 0.43        |
| SC-9  | 500       | DBPS 100 yr.  | 2170.00 | 7190.84   | 7196.85   |           | 6.00         | 3.93        | 7197.21   | 0.021590   | 4.66      | 5.30        | 465.67    | 116.89    | 0.43        |
| SC-9  | 400       | FEMA 100 yr.  | 2600.00 | 7188.26   | 7195.80   |           | 7.55         | 4.52        | 7196.31   | 0.011095   | 4.33      | 3.13        | 601.08    | 129.94    | 0.47        |
| SC-9  | 400       | DBPS 100 yr.  | 2170.00 | 7188.26   | 7195.00   |           | 6.97         | 4.05        | 7195.70   | 0.011093   | 4.12      | 2.86        | 526.67    | 127.30    | 0.47        |
| 00-3  | 1400      | DBI 0 100 yr. | 2170.00 | 7 100.20  | 7 100.20  |           | 0.57         | 4.03        | 7 133.70  | 0.011300   | 7.12      | 2.00        | 320.07    | 127.50    | 0.40        |
| SC-9  | 300       | FEMA 100 yr.  | 2600.00 | 7185.84   | 7195.00   |           | 9.16         | 4.61        | 7195.35   | 0.008203   | 3.60      | 2.36        | 722.98    | 153.91    | 0.39        |
| SC-9  | 300       | DBPS 100 yr.  | 2170.00 | 7185.84   | 7194.39   |           | 8.55         | 4.13        | 7194.72   | 0.008492   | 3.45      | 2.19        | 629.13    | 149.48    | 0.40        |
| 20.0  | 000       | 55144 400     | 2000 00 | 710100    | 7400.07   | 7400.07   |              |             | 740440    | 0.044070   |           | 0.55        | 504.40    | 100.70    | 0.00        |
| SC-9  | 200       | FEMA 100 yr.  | 2600.00 | 7184.80   | 7192.37   | 7192.37   | 7.57         | 4.04        | 7194.16   | 0.014070   | 5.15      | 3.55        | 504.40    | 122.72    | 0.93        |
| SC-9  | 200       | DBPS 100 yr.  | 2170.00 | 7184.80   | 7191.93   | 7191.93   | 7.13         | 3.68        | 7193.55   | 0.013257   | 4.81      | 3.04        | 451.01    | 120.51    | 0.93        |
| SC-9  | 100       | FEMA 100 yr.  | 2600.00 | 7183.63   | 7189.36   | 7187.84   | 5.73         | 3.51        | 7189.73   | 0.015012   | 3.90      | 3.29        | 666.60    | 188.93    | 0.46        |
| SC-9  | 100       | DBPS 100 yr.  | 2170.00 | 7183.63   | 7188.93   | 7185.98   | 5.30         | 3.20        | 7189.27   | 0.015018   | 3.69      | 3.00        | 587.34    | 182.54    | 0.46        |

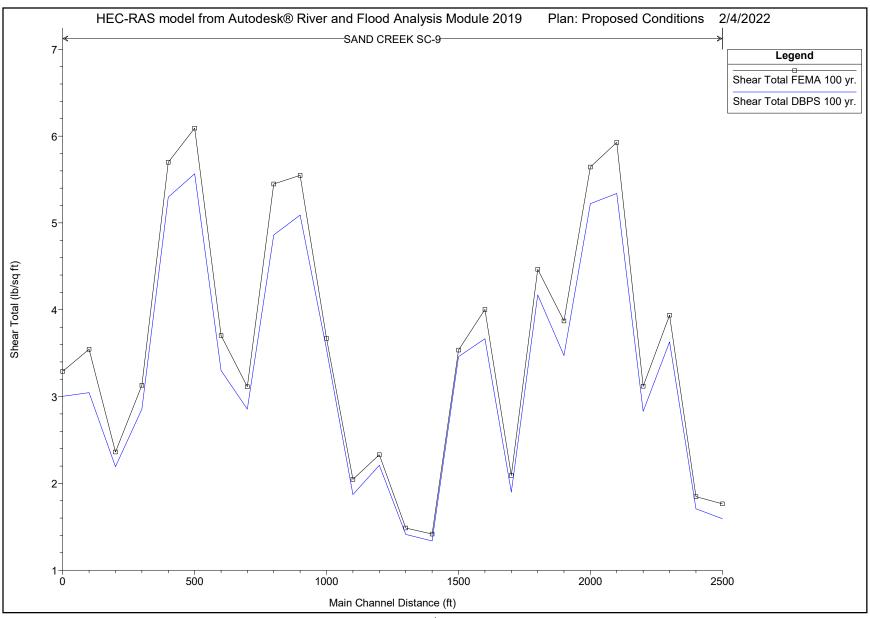

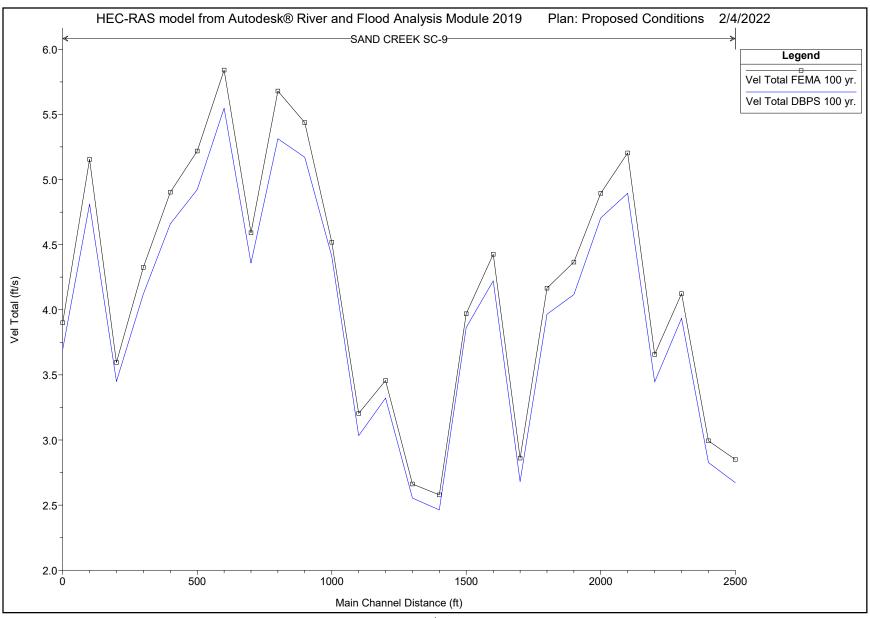

## SECTION 404 PERMTTING WETLAND IMPACT MAP (CORE CONSULTANTS REPORT)





September 22, 2021

Loren Moreland Classic Homes 2138 Flying Horse Club Dr. Colorado Springs, CO 80921

RE: Filing 2- Retreat at Timber Ridge- Anticipated Wetland and Stream Mitigation

Dear Mr. Moreland:

At your request, CORE Consultants, Inc. (CORE) evaluated the proposed temporary and permanent impacts to Sand Creek and its' associated tributaries and wetland features for the Retreat at Timber Ridge-Filing 2 project. Based on the Filing 2 design files Classic Consulting (Classic) provided CORE on September 9, 2021 and follow up discussions with Marc Whorton (Classic) regarding the nature of the proposed impacts, CORE determined that 0.049 acres of permanent wetland impacts and 0.040 acres of temporary wetland impacts are proposed. Additionally, construction of Filing 2 will require 0.073 acres of permanent stream channel impacts and 0.009 acres of temporary stream channel impacts.

General Condition 23 of the 2021 Nationwide Permits issued by the United States Army Corps of Engineers (USACE) identifies the appropriate and practicable mitigation necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal. Per General Condition 23(c), compensatory mitigation at a minimum one-for-one ratio will be required for all wetland losses that exceed 1/10-acre (0.1 acres). Because Filing 2 of this project proposes less than 0.1 acres of permanent wetland impacts (wetland losses), we do not anticipate that the USACE will require compensatory mitigation for wetlands. Per General Condition 23(d), compensatory mitigation at a minimum one-for-one ratio will be required for all losses of stream bed that exceed 3/100-acre (0.03 acres) and require preconstruction notification. Because Filing 2 of this project proposes 0.073 acres of permanent stream impacts, we anticipate that the USACE will require compensatory mitigation for streams.

For stream mitigation, the USACE now requires applicants complete a Stream Quantification Tool to determine the amount of mitigation required based on the pre-construction functionality of the stream (reach hydrology and hydraulics, geomorphology, physicochemical, and biology). CORE is working with the USACE as well as WaterVation, PLLC to determine the mitigation required and develop a mitigation approach that satisfies the USACE's requirements for stream rehabilitation, enhancement, and/or preservation as deemed appropriate for this project area.

Sincerely,

CORE Consultants, Inc.

**Natalie Graves** 

Natural Resources Project Manager


Attachments- Filing 2- Proposed Impacts Map



## Retreat at Timber Ridge


## Filing 2 Wetland Impact Map


El Paso County, Colorado

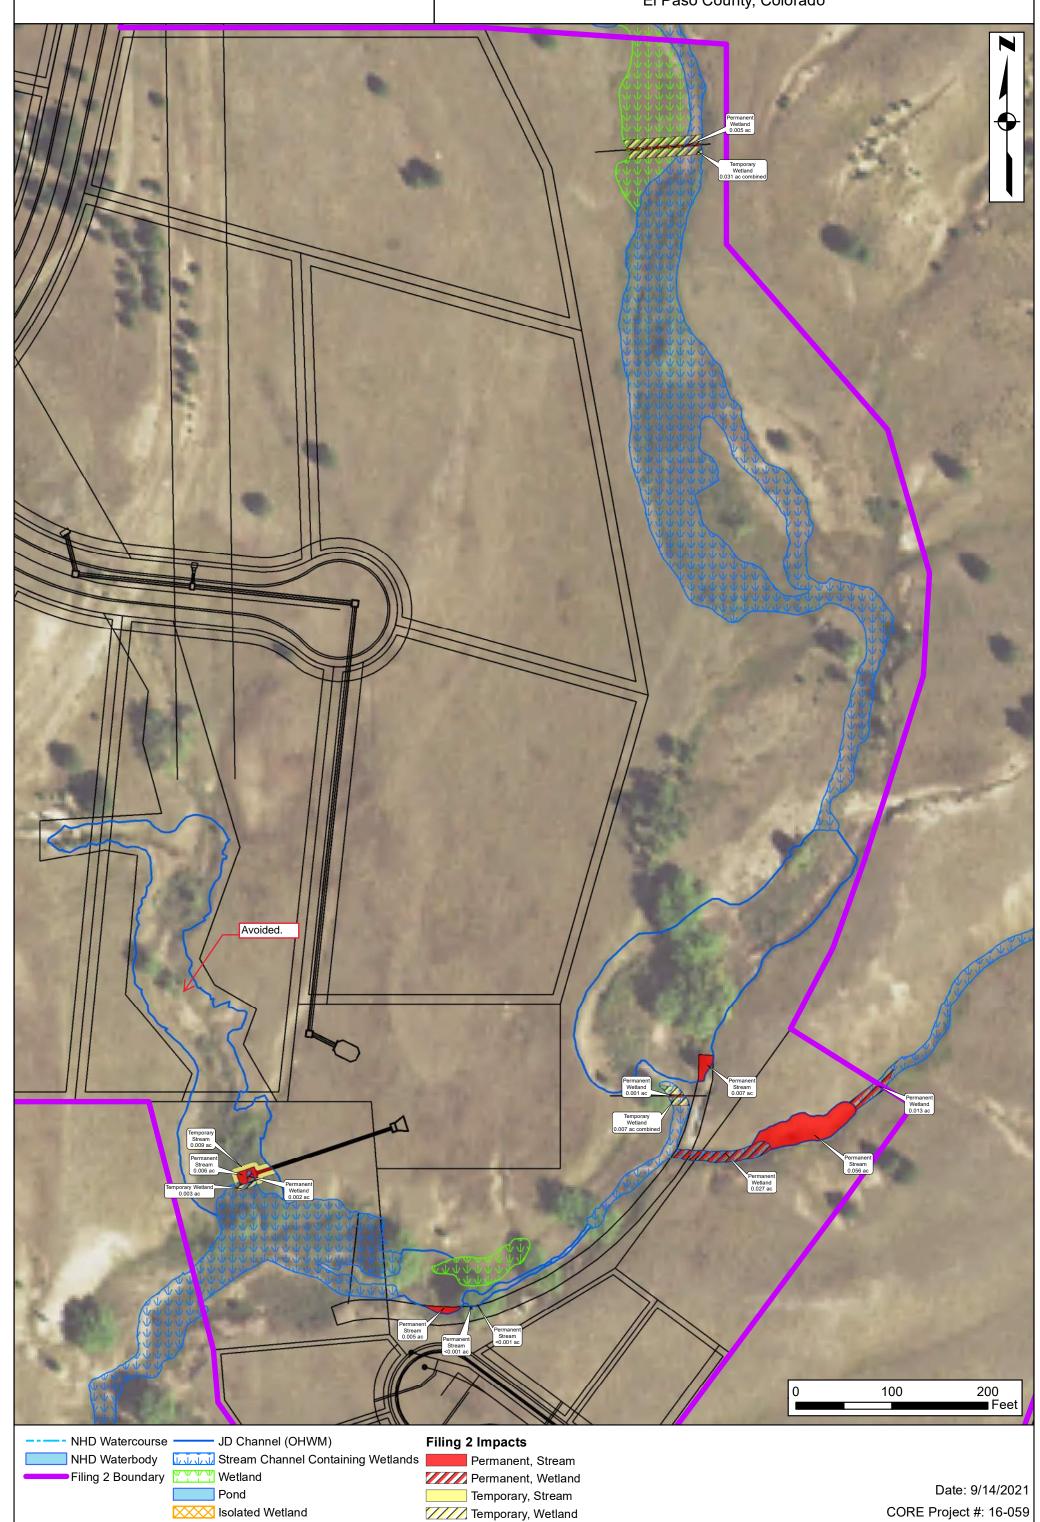


**DRAINAGE MAPS** 



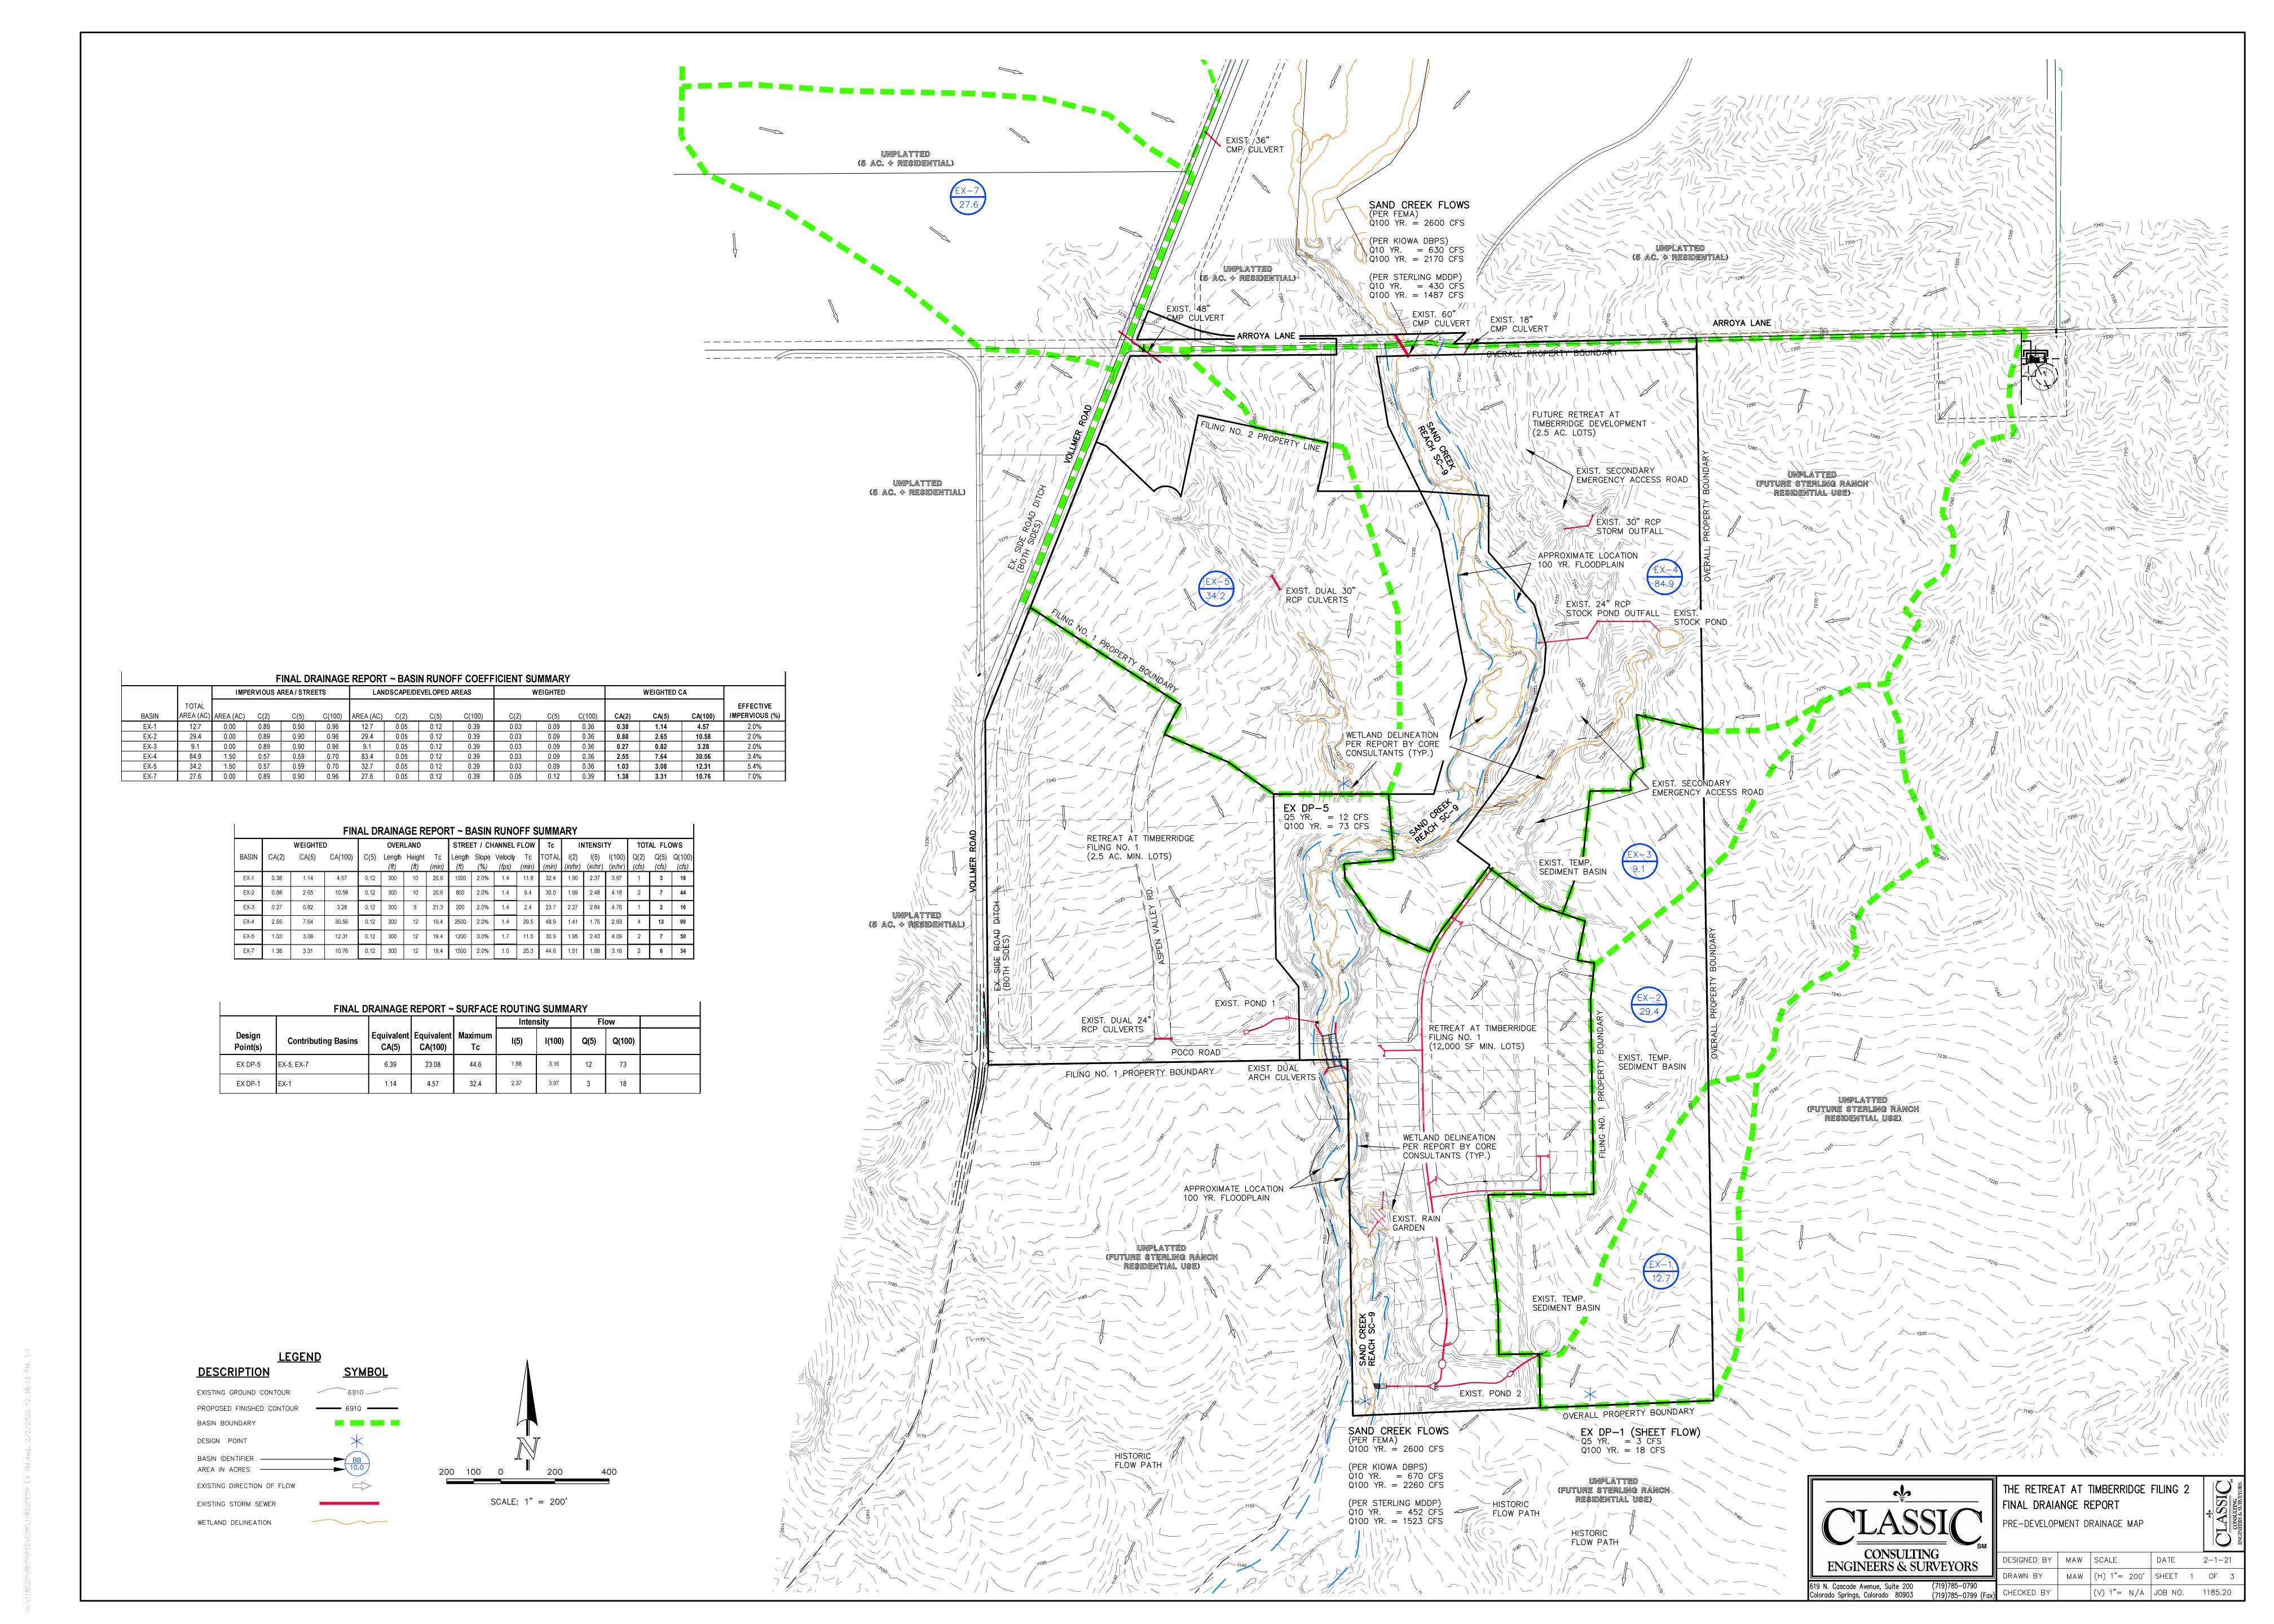


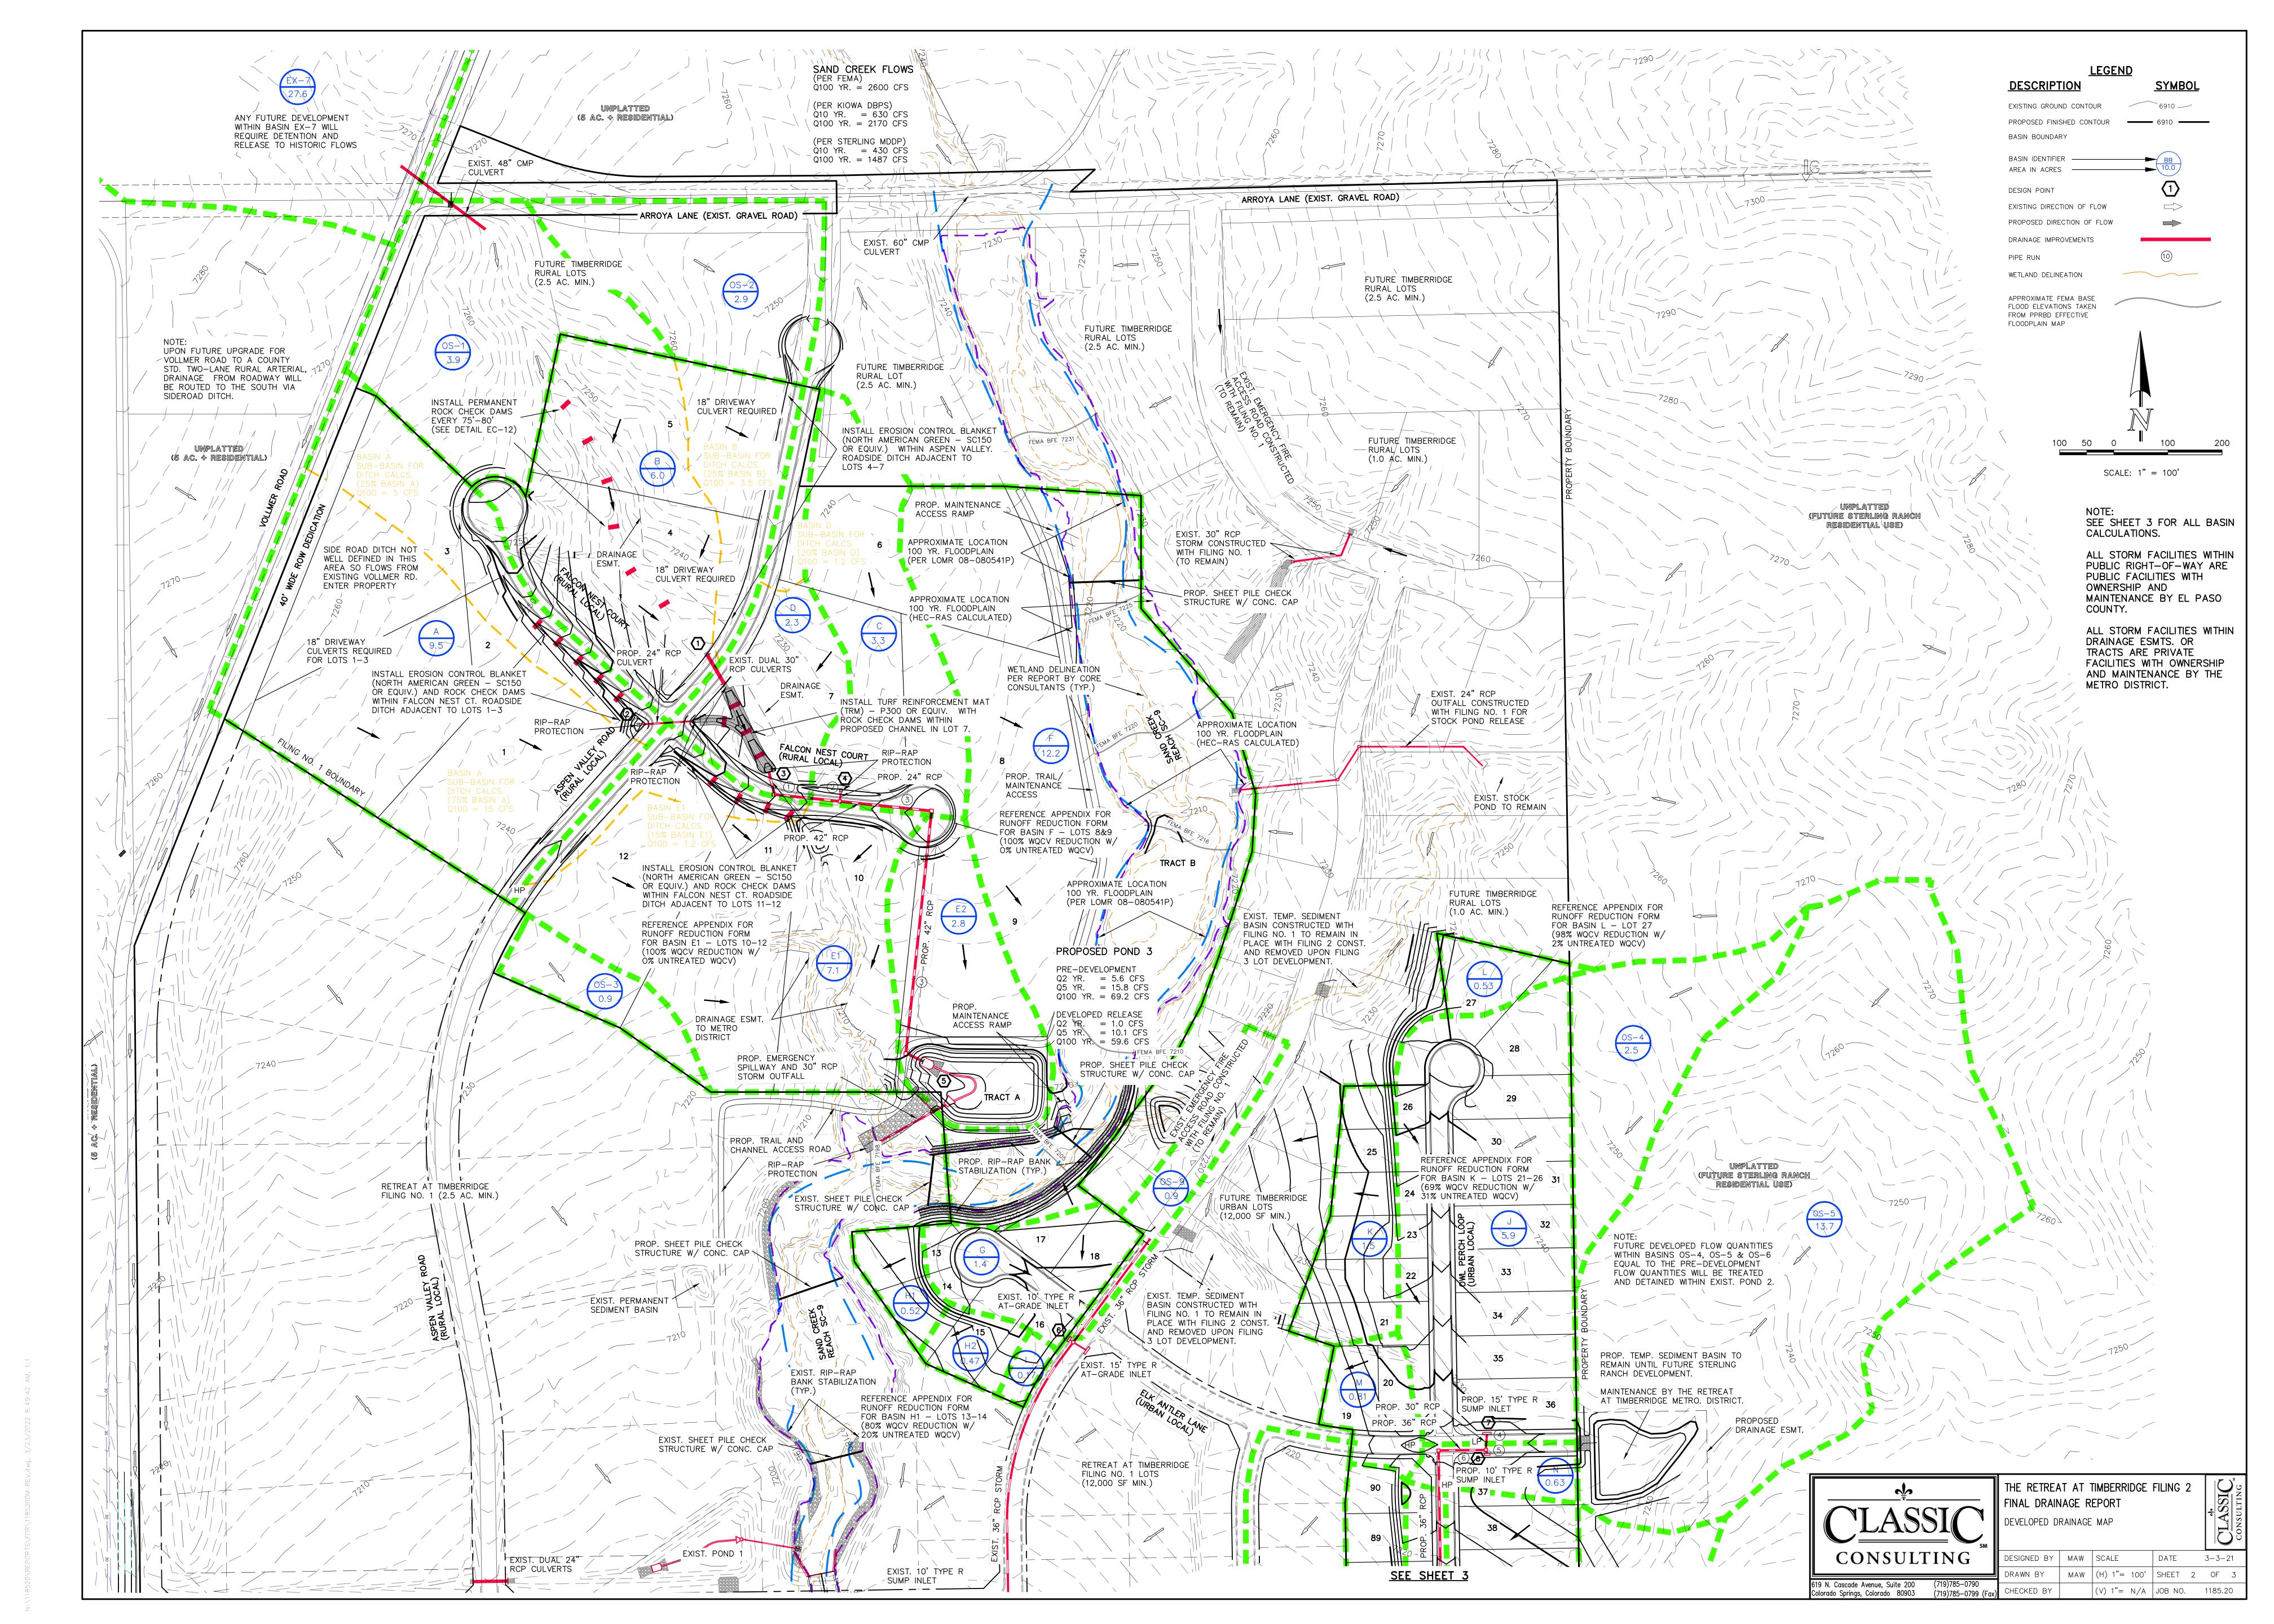

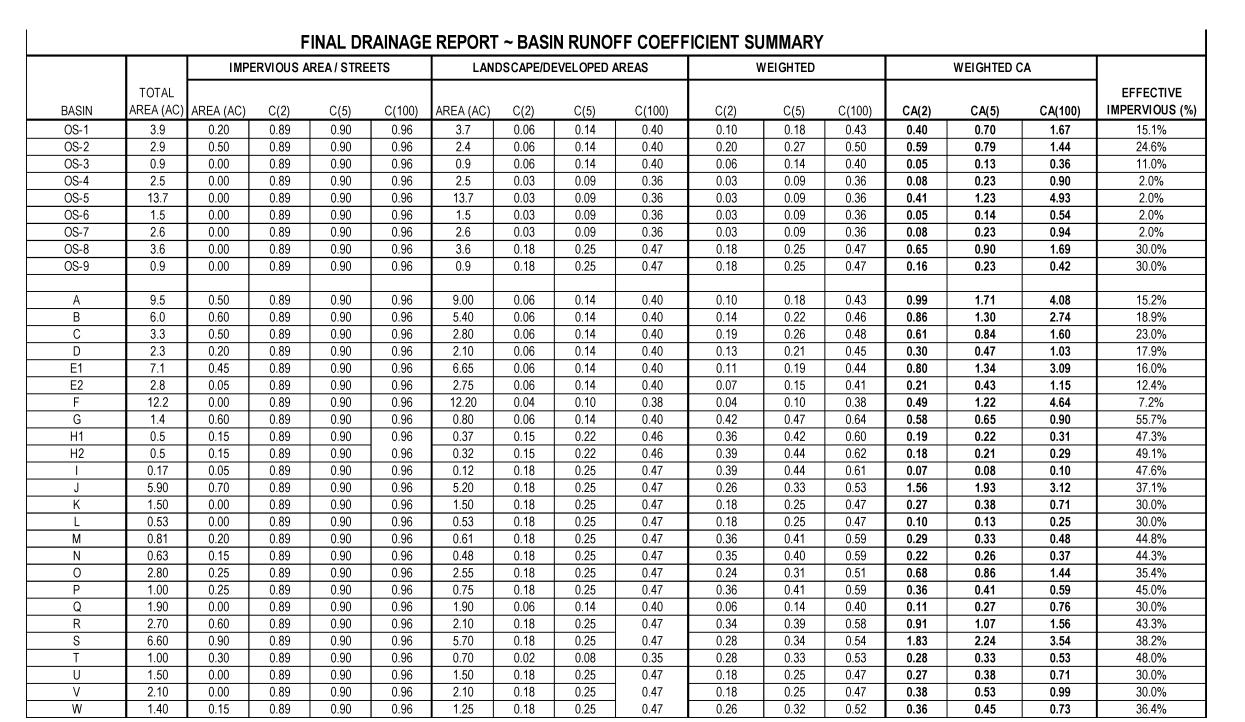

|                    | FINAL D                                                   | RAINAGE             | REPORT ~              | SURFACE       | ROUTIN | G SUMM/ | ARY  |        |                                    |
|--------------------|-----------------------------------------------------------|---------------------|-----------------------|---------------|--------|---------|------|--------|------------------------------------|
|                    |                                                           |                     |                       |               | Inter  | nsity   | FI   | ow     |                                    |
| Design<br>Point(s) | Contributing Basins                                       | Equivalent<br>CA(5) | Equivalent<br>CA(100) | Maximum<br>Tc | I(5)   | I(100)  | Q(5) | Q(100) | Inlet Size                         |
| 1                  | EX-7, OS-1, OS-2, B (40.4 AC.)                            | 6.09                | 16.61                 | 40.4          | 2.04   | 3.41    | 12   | 57     | EX. DUAL 30" RCP<br>CULVERTS       |
| 2                  | Basin A (9.5 AC.)                                         | 1.71                | 4.08                  | 23.0          | 2.88   | 4.84    | 5    | 20     | 24" RCP CULVERT                    |
| 3                  | DP-1, DP-2, Basin D (52.2 ac.)                            | 8.28                | 21.72                 | 40.9          | 2.02   | 3.38    | 17   | 74     | 42" RCP CULVER1                    |
| 4                  | Basin C (3.3 AC.)                                         | 0.84                | 1.60                  | 20.2          | 3.08   | 5.16    | 3    | 8      | 24" RCP CULVER1                    |
| 5                  | POND 3 TOTAL INFLOW<br>DP-3, DP-4, BASIN E2<br>(58.3 AC.) | 9.55                | 24.47                 | 43.4          | 1.93   | 3.23    | 18   | 79     | POND 3                             |
| 6                  | Basin G, Basin OS-9 (2.3 ac.)                             | 0.88                | 1.32                  | 13.8          | 3.65   | 6.12    | 3    | 8      | Exist 10' TYPE R<br>AT GRADE INLET |
| 7                  | Basin OS-4, J and 70% of Basin OS-5 (18.0 ac.)            | 3.02                | 7.47                  | 20.2          | 3.08   | 5.16    | 9    | 39     | 15' TYPE R SUMP<br>INLET           |
| 8                  | Basin N and 30% of Basin OS-5 (4.7 ac.)                   | 0.62                | 1.85                  | 20.2          | 3.08   | 5.16    | 2    | 10     | 10' TYPE R<br>SUMP INLET           |
| 9                  | Basin OS-8, Q (5.5 ac.)                                   | 1.17                | 2.45                  | 15.7          | 3.45   | 5.79    | 4    | 14     | Exist 10' TYPE R<br>SUMP INLET     |
| 10                 | Basin OS-6, O (4.3 ac.)                                   | 1.00                | 1.98                  | 18.1          | 3.24   | 5.44    | 3    | 11     | 10' TYPE R<br>SUMP INLET           |
| 11                 | Basin P (1.0 ac.)                                         | 0.41                | 0.59                  | 10.6          | 4.05   | 6.80    | 2    | 4      | 5' TYPE R<br>SUMP INLET            |
| 12                 | Basin R (2.7 ac.)                                         | 1.07                | 1.56                  | 15.6          | 3.46   | 5.82    | 4    | 9      | 10' TYPE R AT<br>GRADE INLET       |
| 13                 | Basin S and Flow-by from<br>Basin R (9.3 ac.)             | 2.25                | 3.93                  | 16.1          | 3.42   | 5.74    | 8    | 23     | 15' TYPE R<br>SUMP INLET           |
| 14                 | Basin T (1.0 ac.)                                         | 0.33                | 0.53                  | 12.8          | 3.76   | 6.32    | 1    | 3      | 5' TYPE R<br>SUMP INLET            |
| 15                 | Basin V, W and OS-7 (6.1 ac.)                             | 1.21                | 2.65                  | 15.6          | 3.46   | 5.81    | 4    | 15     | TEMP. SEDIMENT<br>BASIN            |

|          | FINAL               | . DRAINAG           | FINAL DRAINAGE REPORT ~ PIPE ROUTING SUMMARY |               |       |        |      |        |            |  |  |  |  |  |  |
|----------|---------------------|---------------------|----------------------------------------------|---------------|-------|--------|------|--------|------------|--|--|--|--|--|--|
|          |                     |                     |                                              |               | Inter | sity   | FI   | ow     |            |  |  |  |  |  |  |
| Pipe Run | Contributing Basins | Equivalent<br>CA(5) | Equivalent<br>CA(100)                        | Maximum<br>Tc | I(5)  | I(100) | Q(5) | Q(100) | Pipe Size* |  |  |  |  |  |  |
| 1        | DP-3                | 8.28                | 21.72                                        | 40.9          | 2.02  | 3.38   | 17   | 74     | 42" RCP    |  |  |  |  |  |  |
| 2        | DP-4                | 0.84                | 1.60                                         | 20.2          | 3.08  | 5.16   | 3    | 8      | 24" RCP    |  |  |  |  |  |  |
| 3        | PR-1, PR-2          | 9.12                | 23.32                                        | 40.9          | 2.02  | 3.38   | 18   | 79     | 42" RCP    |  |  |  |  |  |  |
| 4        | DP-7                | 3.02                | 7.47                                         | 20.2          | 3.08  | 5.16   | 9    | 39     | 30" RCP    |  |  |  |  |  |  |
| 5        | DP-8                | 0.62                | 1.85                                         | 20.2          | 3.08  | 5.16   | 2    | 10     | 24" RCP    |  |  |  |  |  |  |
| 6        | PR-1, PR-2          | 3.64                | 9.32                                         | 20.8          | 3.03  | 5.09   | 11   | 47     | 36" RCP    |  |  |  |  |  |  |
| 7        | DP-10               | 1.00                | 1.98                                         | 10.6          | 4.05  | 6.80   | 4    | 13     | 24" RCP    |  |  |  |  |  |  |
| 8        | DP-11               | 0.41                | 0.59                                         | 13.8          | 3.65  | 6.12   | 2    | 4      | 18" RCP    |  |  |  |  |  |  |
| 9        | PR-3, PR-4, PR-5    | 5.05                | 11.89                                        | 21.8          | 2.96  | 4.97   | 15   | 59     | 36" RCP    |  |  |  |  |  |  |
| 10       | DP-12 Pickup        | 1.05                | 1.17                                         | 15.6          | 3.46  | 5.82   | 4    | 7      | 24" RCP    |  |  |  |  |  |  |
| 11       | PR-6, PR-7          | 6.11                | 13.06                                        | 22.2          | 2.93  | 4.92   | 18   | 64     | 36" RCP    |  |  |  |  |  |  |
| 12       | DP-13               | 2.25                | 3.93                                         | 16.1          | 3.42  | 5.74   | 8    | 23     | 30" RCP    |  |  |  |  |  |  |
| 13       | DP-14               | 0.33                | 0.53                                         | 16.3          | 3.40  | 5.70   | 1    | 3      | 18" RCP    |  |  |  |  |  |  |
| 14       | PR-9, PR-10         | 2.57                | 4.47                                         | 16.3          | 3.40  | 5.70   | 9    | 25     | 30" RCP    |  |  |  |  |  |  |
| 15       | PR-8, PR-11         | 8.68                | 17.53                                        | 22.7          | 2.90  | 4.87   | 25   | 85     | 42" RCP    |  |  |  |  |  |  |

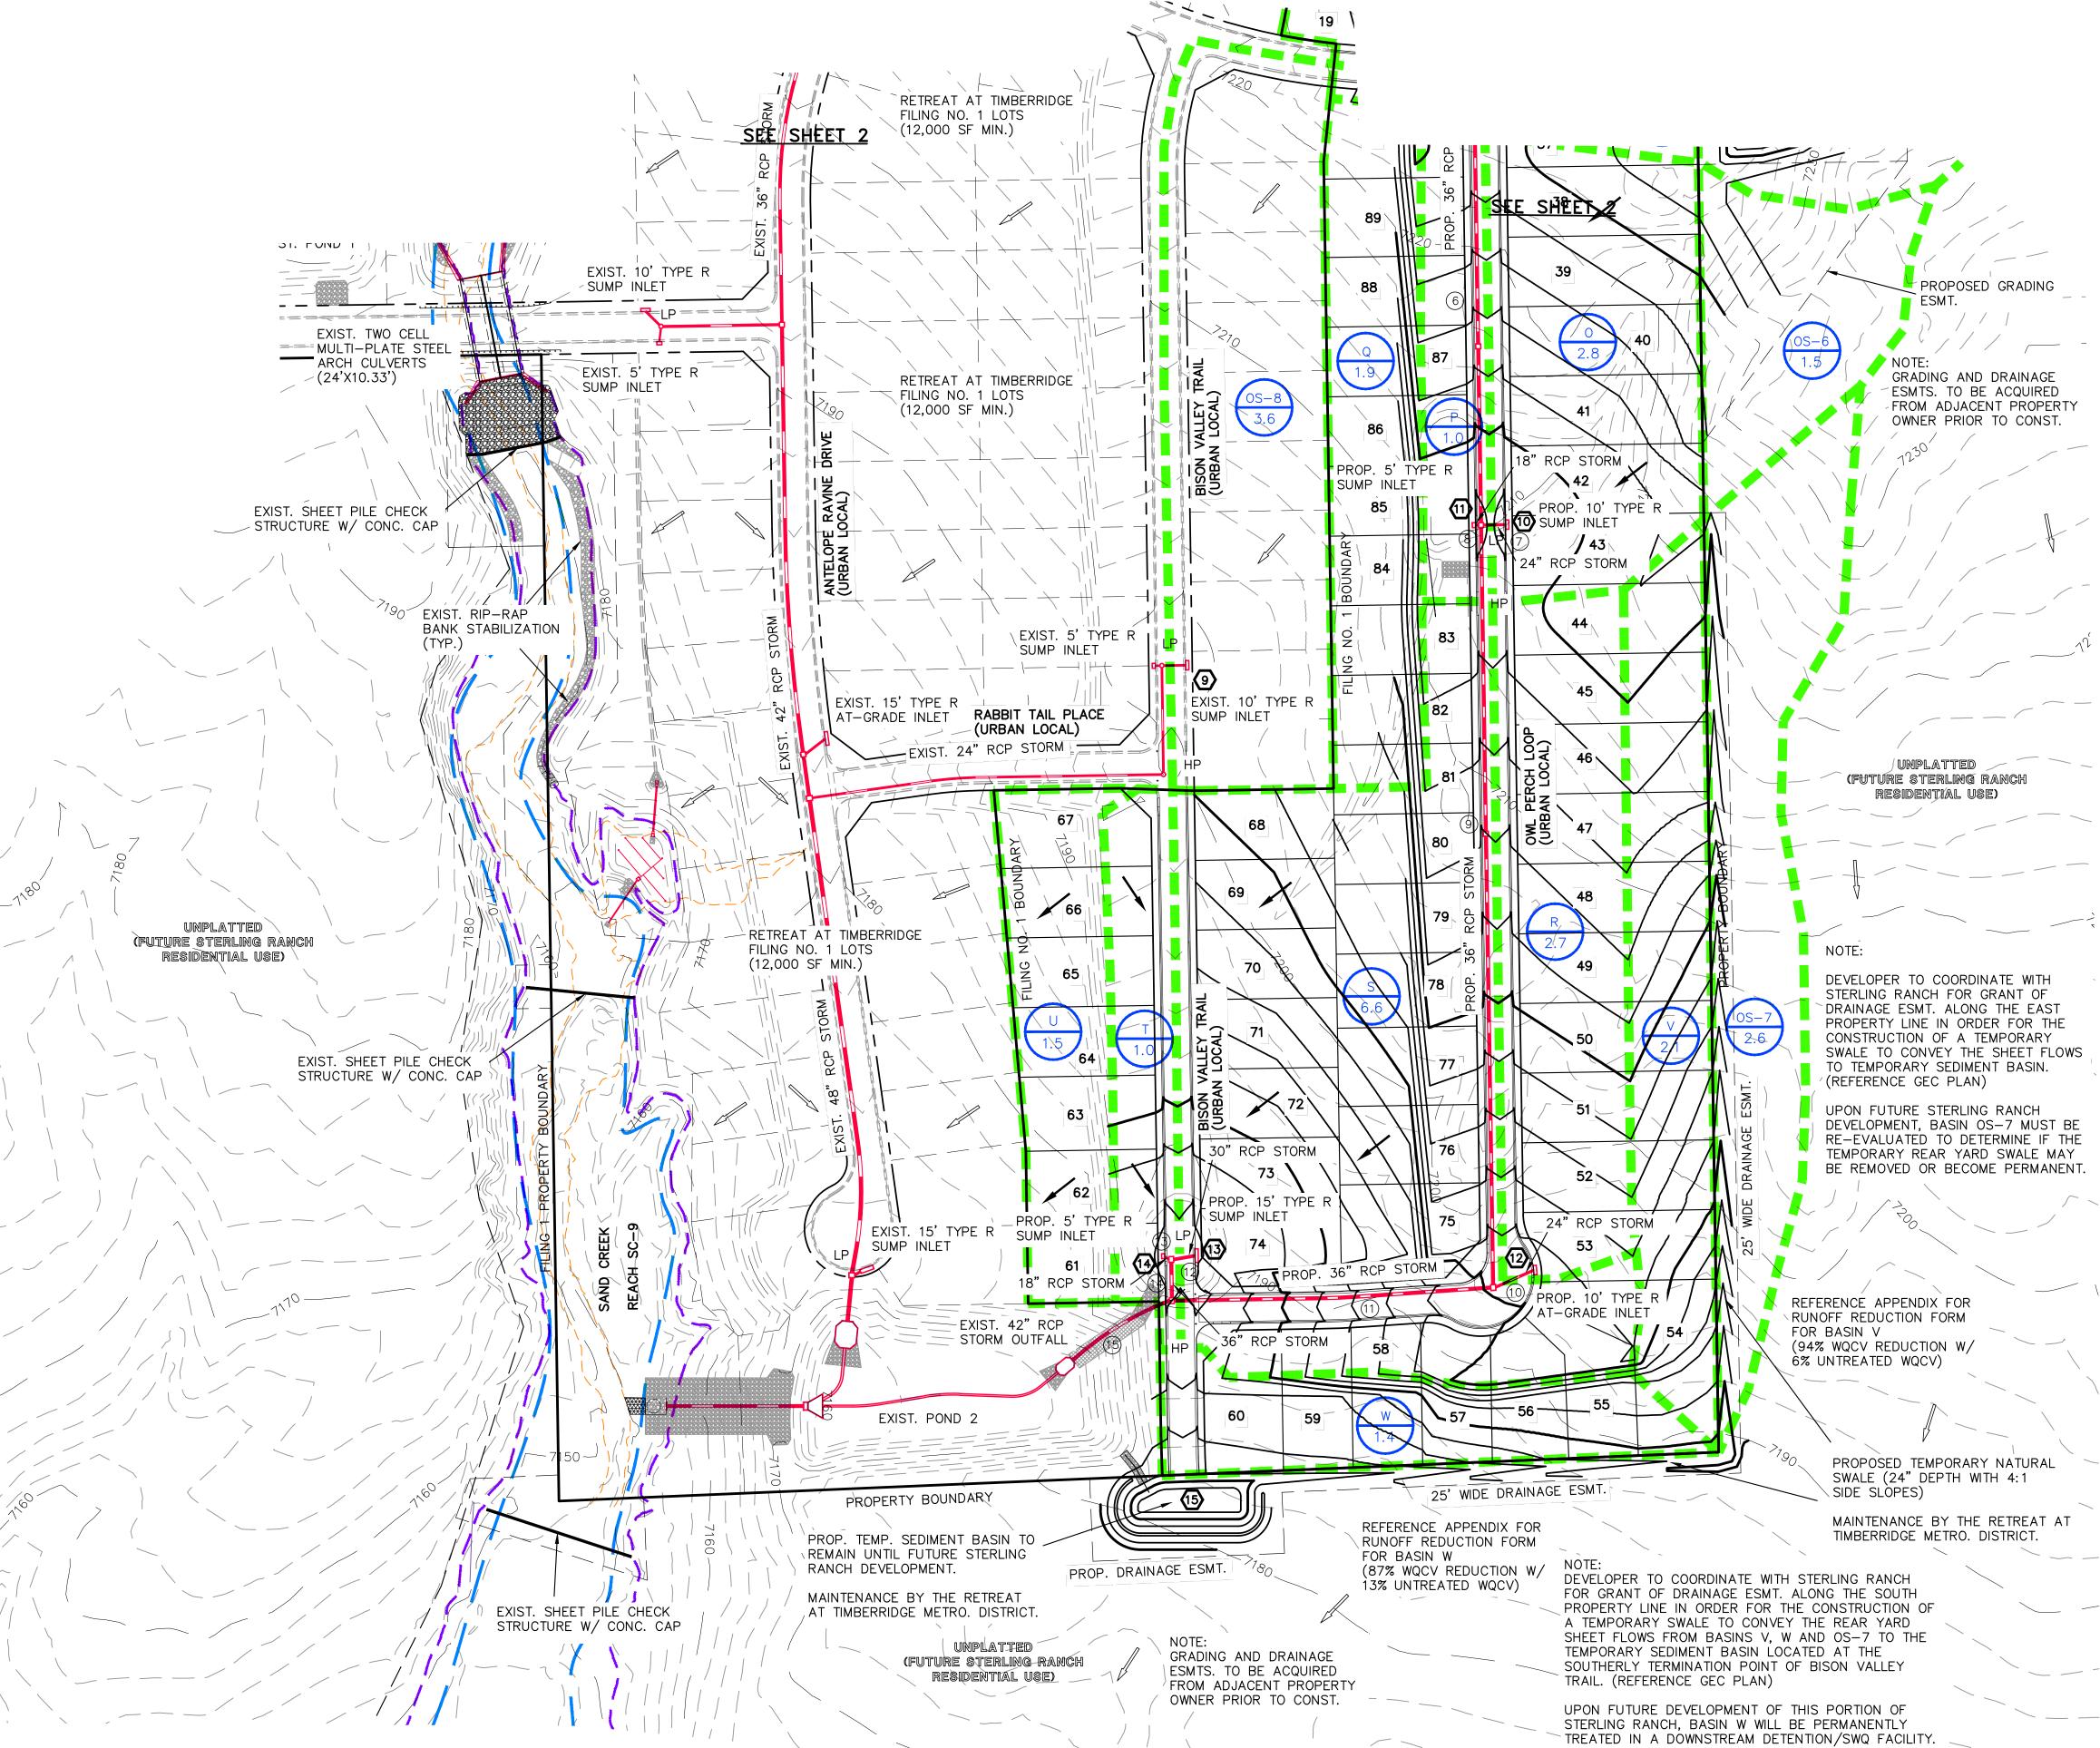


|       | WEIGHTED |       |         |      | OVERLAND    |             |             | STREET / CHANNEL FLOW |              |                |             | Тс             | INTENSITY       |                 |                   | TOTAL FLOWS   |               |                |
|-------|----------|-------|---------|------|-------------|-------------|-------------|-----------------------|--------------|----------------|-------------|----------------|-----------------|-----------------|-------------------|---------------|---------------|----------------|
| BASIN | CA(2)    | CA(5) | CA(100) | C(5) | Length (ft) | Height (ft) | Tc<br>(min) | Length (ft)           | Slope<br>(%) | Velocity (fps) | Tc<br>(min) | TOTAL<br>(min) | l(2)<br>(in/hr) | l(5)<br>(in/hr) | l(100)<br>(in/hr) | Q(2)<br>(cfs) | Q(5)<br>(cfs) | Q(100<br>(cfs) |
| OS-1  | 0.40     | 0.70  | 1.67    | 0.14 | 300         | 10.5        | 19.9        |                       |              |                |             | 19.9           | 2.48            | 3.10            | 5.20              | 1             | 2             | 9              |
| OS-2  | 0.59     | 0.79  | 1.44    | 0.14 | 300         | 8           | 21.7        | 100                   | 2.0%         | 1.4            | 1.2         | 22.9           | 2.31            | 2.89            | 4.84              | 1             | 2             | 7              |
| OS-3  | 0.05     | 0.13  | 0.36    | 0.14 | 300         | 12          | 19.0        |                       |              |                |             | 19.0           | 2.53            | 3.17            | 5.32              | 0.1           | 0.4           | 2              |
| OS-4  | 0.08     | 0.23  | 0.90    | 0.09 | 300         | 12          | 20.0        |                       |              |                |             | 20.0           | 2.47            | 3.09            | 5.19              | 0.2           | 0.7           | 5              |
| OS-5  | 0.41     | 1.23  | 4.93    | 0.09 | 300         | 12          | 20.0        |                       |              |                |             | 20.0           | 2.47            | 3.09            | 5.19              | 1             | 4             | 26             |
| OS-6  | 0.05     | 0.14  | 0.54    | 0.09 | 275         | 13          | 18.1        |                       |              |                |             | 18.1           | 2.59            | 3.24            | 5.44              | 0.1           | 0.4           | 3              |
| OS-7  | 0.08     | 0.23  | 0.94    | 0.09 | 250         | 16          | 15.6        |                       |              |                |             | 15.6           | 2.76            | 3.46            | 5.81              | 0.2           | 0.8           | 5              |
| OS-8  | 0.65     | 0.90  | 1.69    | 0.25 | 100         | 2           | 12.2        | 600                   | 2.0%         | 2.8            | 3.5         | 15.7           | 2.75            | 3.45            | 5.79              | 2             | 3             | 10             |
| OS-9  | 0.16     | 0.23  | 0.42    | 0.25 | 50          | 1           | 8.6         | 600                   | 3.0%         | 3.5            | 2.9         | 11.5           | 3.13            | 3.92            | 6.58              | 0.5           | 0.9           | 3              |
| A     | 0.99     | 1.71  | 4.08    | 0.14 | 300         | 10.5        | 19.9        | 375                   | 4.0%         | 2.0            | 3.1         | 23.0           | 2.30            | 2.88            | 4.84              | 2             | 5             | 20             |
| В     | 0.86     | 1.30  | 2.74    | 0.14 | 230         | 15          | 14.2        | 450                   | 2.0%         | 1.4            | 5.3         | 19.5           | 2.50            | 3.13            | 5.25              | 2             | 4             | 14             |
| С     | 0.61     | 0.84  | 1.60    | 0.14 | 300         | 10          | 20.2        |                       |              |                |             | 20.2           | 2.46            | 3.08            | 5.16              | 2             | 3             | 8              |
| D     | 0.30     | 0.47  | 1.03    | 0.14 | 250         | 10          | 17.3        |                       |              |                |             | 17.3           | 2.64            | 3.30            | 5.54              | 1             | 2             | 6              |
| E1    | 0.80     | 1.34  | 3.09    | 0.14 | 300         | 12          | 19.0        | 300                   | 2.0%         | 1.4            | 3.5         | 22.5           | 2.33            | 2.91            | 4.88              | 2             | 4             | 15             |
| E2    | 0.21     | 0.43  | 1.15    | 0.14 | 300         | 7           | 22.7        |                       |              |                |             | 22.7           | 2.32            | 2.90            | 4.87              | 0.5           | 1.2           | 6              |
| F     | 0.49     | 1.22  | 4.64    | 0.10 | 300         | 9           | 21.8        | 600                   | 1.5%         | 1.2            | 8.2         | 29.9           | 1.99            | 2.48            | 4.17              | 1             | 3             | 19             |
| G     | 0.58     | 0.65  | 0.90    | 0.14 | 100         | 2           | 13.8        |                       |              |                |             | 13.8           | 2.91            | 3.65            | 6.12              | 1.7           | 2.4           | 5              |
| H1    | 0.19     | 0.22  | 0.31    | 0.22 | 100         | 4           | 10.1        |                       |              |                |             | 10.1           | 3.29            | 4.12            | 6.92              | 0.6           | 0.9           | 2              |
| H2    | 0.18     | 0.21  | 0.29    | 0.22 | 100         | 4           | 10.1        |                       |              |                |             | 10.1           | 3.29            | 4.12            | 6.92              | 0.6           | 0.8           | 2              |
| I     | 0.07     | 0.08  | 0.10    | 0.25 | 100         | 6           | 8.5         |                       |              |                |             | 8.5            | 3.49            | 4.37            | 7.34              | 0.2           | 0.3           | 0.8            |
| J     | 1.56     | 1.93  | 3.12    | 0.25 | 100         | 2           | 12.2        | 600                   | 2.0%         | 2.8            | 3.5         | 15.7           | 2.75            | 3.45            | 5.79              | 4             | 7             | 18             |
| К     | 0.27     | 0.38  | 0.71    | 0.25 | 100         | 3           | 10.7        |                       |              |                |             | 10.7           | 3.22            | 4.03            | 6.77              | 1             | 2             | 5              |
| L     | 0.10     | 0.13  | 0.25    | 0.25 | 100         | 8           | 7.7         |                       |              |                |             | 7.7            | 3.60            | 4.52            | 7.58              | 0.3           | 0.6           | 2              |
| М     | 0.29     | 0.33  | 0.48    | 0.25 | 100         | 2           | 12.2        | 100                   | 2.0%         | 2.8            | 0.6         | 12.8           | 3.00            | 3.76            | 6.31              | 0.9           | 1.2           | 3              |
| N     | 0.22     | 0.26  | 0.37    | 0.25 | 100         | 2           | 12.2        | 80                    | 2.0%         | 2.8            | 0.5         | 12.7           | 3.01            | 3.77            | 6.33              | 0.7           | 1.0           | 2              |
| 0     | 0.68     | 0.86  | 1.44    | 0.25 | 100         | 2           | 12.2        | 400                   | 3.0%         | 3.5            | 1.9         | 14.1           | 2.88            | 3.61            | 6.06              | 2             | 3             | 9              |
| Р     | 0.36     | 0.41  | 0.59    | 0.25 | 50          | 1           | 8.6         | 400                   | 3.0%         | 3.5            | 1.9         | 10.6           | 3.23            | 4.05            | 6.80              | 1             | 2             | 4              |
| Q     | 0.11     | 0.27  | 0.76    | 0.14 | 80          | 5           | 8.5         |                       |              |                |             | 8.5            | 3.49            | 4.38            | 7.35              | 0.4           | 1.2           | 6              |
| R     | 0.91     | 1.07  | 1.56    | 0.25 | 100         | 2           | 12.2        | 700                   | 3.0%         | 3.5            | 3.4         | 15.6           | 2.77            | 3.46            | 5.82              | 3             | 4             | 9              |
| S     | 1.83     | 2.24  | 3.54    | 0.25 | 50          | 1           | 8.6         | 1100                  | 3.0%         | 3.5            | 5.3         | 13.9           | 2.90            | 3.63            | 6.10              | 5             | 8             | 22             |
| Т     | 0.28     | 0.33  | 0.53    | 0.08 | 50          | 1           | 10.4        | 500                   | 3.0%         | 3.5            | 2.4         | 12.8           | 3.00            | 3.76            | 6.32              | 0.8           | 1.2           | 3              |
| U     | 0.27     | 0.38  | 0.71    | 0.25 | 80          | 5           | 7.5         |                       |              |                |             | 7.5            | 3.64            | 4.56            | 7.66              | 1             | 2             | 5              |
| V     | 0.38     | 0.53  | 0.99    | 0.25 | 90          | 1.8         | 11.6        |                       |              |                |             | 11.6           | 3.12            | 3.91            | 6.56              | 1             | 2             | 6              |
| W     | 0.36     | 0.45  | 0.73    | 0.25 | 100         | 3           | 10.7        |                       |              |                |             | 10.7           | 3.22            | 4.03            | 6.77              | 1             | 2             | 5              |

NOTE:

ALL STORM FACILITIES WITHIN PUBLIC RIGHT—OF—WAY ARE PUBLIC FACILITIES WITH OWNERSHIP AND MAINTENANCE BY EL PASO COUNTY.

ALL STORM FACILITIES WITHIN DRAINAGE ESMTS. OR TRACTS ARE PRIVATE FACILITIES WITH OWNERSHIP AND MAINTENANCE BY THE METRO DISTRICT.

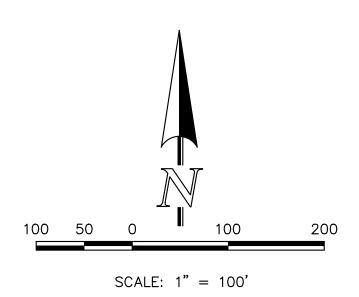

| <u>LEGEND</u><br><u>DESCRIPTION</u>                   | SYMBOL  |
|-------------------------------------------------------|---------|
| EXISTING GROUND CONTOUR                               | 6910    |
| PROPOSED FINISHED CONTOUR -                           | 6910    |
| BASIN BOUNDARY                                        |         |
| BASIN IDENTIFIER ———————————————————————————————————— | BB 10.0 |
| DESIGN POINT                                          | 1       |
| EXISTING DIRECTION OF FLOW                            |         |
| PROPOSED DIRECTION OF FLOW                            |         |
| DRAINAGE IMPROVEMENTS                                 |         |
| PIPE RUN                                              | 10      |
| WETLAND DELINEATION                                   |         |

CHECKED BY



Colorado Springs, Colorado 80903 (719)785-0799 (Fax)

| THE RETREA<br>FINAL DRAIN<br>DEVELOPED DI | IAGE R |       | FILING 2 | ${\underbrace{\text{CLASSIC}}_{\text{CONSHITTING}}}$ |
|-------------------------------------------|--------|-------|----------|------------------------------------------------------|
| DESIGNED BY                               | MAW    | SCALE | DATE     | 3-3-21                                               |

DRAWN BY | MAW | (H) 1"= 100' | SHEET 3 OF 3

(V) 1"= N/A JOB NO. 1185.20