

## **Traffic Impact Studies**

## **Traffic Engineer's Statement**


The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.

Max Rusch	10-10-22
Max Rusch P.E. #55895	Date

## **Developer's Statement**

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

Brian Kearney, Senior Development Manager Self-Storage Division Johnson Development Associates, Inc. 101 N. Pacific Coast Hwy, Suite 308 El Segundo, CA 90245 <u>9/16/22</u> Date





6162 S. Willow Drive, Suite 320 Greenwood Village, C0 80111 303.770.8884 • GallowayUS.com

## Memorandum

P-225

To:	Elizabeth Nijkamp Engineer Manager, El Paso County
From:	Brian Horan, PE
Date:	April 11, 2022 Revised: June 10, 2022 Revised: July 12, 2022 Revised: August 11, 2022 Revised: September 13, 2022
Re:	Constitution Storage: Traffic Memorandum; PCD No. El Paso County, CO

## INTRODUCTION

This memorandum provides the results of a traffic analysis performed in support of an approximately 3.72-acre lot located in El Paso County, Colorado. Generally, the site is located south of Constitution Avenue, east of Peterson Road, and west of Canada Drive. The site is further identified as El Paso County parcel number 5405218002 and is currently vacant. The site location is shown on Figure 1.



Figure 1 – Site Location

The Applicant, Johnson Development Associates, proposes to develop the site with a 109,033 square foot self-storage (mini warehouse) use with 944 storage units. A full-sized copy of the site plan is provided as Attachment I. The following memorandum has been prepared for the County of El Paso as requested. The purpose is to determine the traffic forecasted by the proposed project and potential impacts to the surrounding roadways. A narrative for the study area for adjacent roadways, intersection and accesses is provided in the existing conditions section below.



## **EXISTING CONDITIONS**

As shown on the site plan provided as Attachment 1, the site is proposed to be accessed via one rightin/right-out (RIRO) movement access along Peterson Road and one full movement access along Canada Drive. Peterson Road and Constitution Avenue provide regional access to the property. No roadway improvements were identified in the area.

Constitution Avenue is constructed as a four-lane roadway divided by a raised median and auxiliary turn lanes provided at intersections. It is classified as an arterial by El Paso County and provides east-west connectivity throughout the region with a posted speed limit of 45 mph in the vicinity of the subject site. The intersection of Constitution Avenue/Peterson Road operates under signalized control and the intersection of Constitution Avenue/Canada Drive operates under unsignalized control.

Peterson Road is constructed as a four-lane roadway divided by a two way left turn (TWLT) lane. It is classified as a minor arterial by El Paso County and provides north-south connectivity throughout the region with a posted speed limit of 35 mph in the vicinity of the subject site. The intersection of Peterson Road/Constitution Avenue operates under signalized control.

Canada Drive is constructed as an undivided two-lane roadway. It is classified as a local roadway by El Paso County and primarily provides north-south access to a number of residential units in the region with a posted speed limit of 25 mph in the vicinity of the subject site. The intersection of Canada Drive/Constitution Avenue operates under unsignalized control. ADTs and peak hour traffic along this roadway are consistent with the roadway section and operates with additional capacity available.

The Major Transportation Corridor Plan (MTCP) was reviewed to determine if any roadway improvements were anticipated in the immediate study area. No such improvements were identified. Additionally, at the time of this writing, no improvements from area development were identified that would impact the proposed development.

Streetlight was used to generate turning movement counts at the intersection of Peterson Rd & Constitution Ave. Streetlight is a program that collects locations records from smartphones as well as connected cars and trucks and can use this data to produce turning movement counts. The Streetlight turning movements were then balanced with ADT counts on the MS2 website, taken in 2021. Figure 2 shows the existing volumes at the intersection of Peterson Rd & Constitution Ave.


## Table 1

## JDA - Constitution Storage

## Site Trip Generation

	Land Use			AM	Peak H	lour	PN	Peak H	our	Average Daily
Land Use	Code	Amount	Units	In	Out	Total	In	Out	Total	Trips
<i>Proposed</i> <sup>(1)</sup> Mini-Warehouse	151	944	UNITS	6	5	11	8	8	16	170

Note(s): (1) Trip generation based on the Institute of Transportation Engineers' <u>Trip Generation Manual</u>, 11th Edition

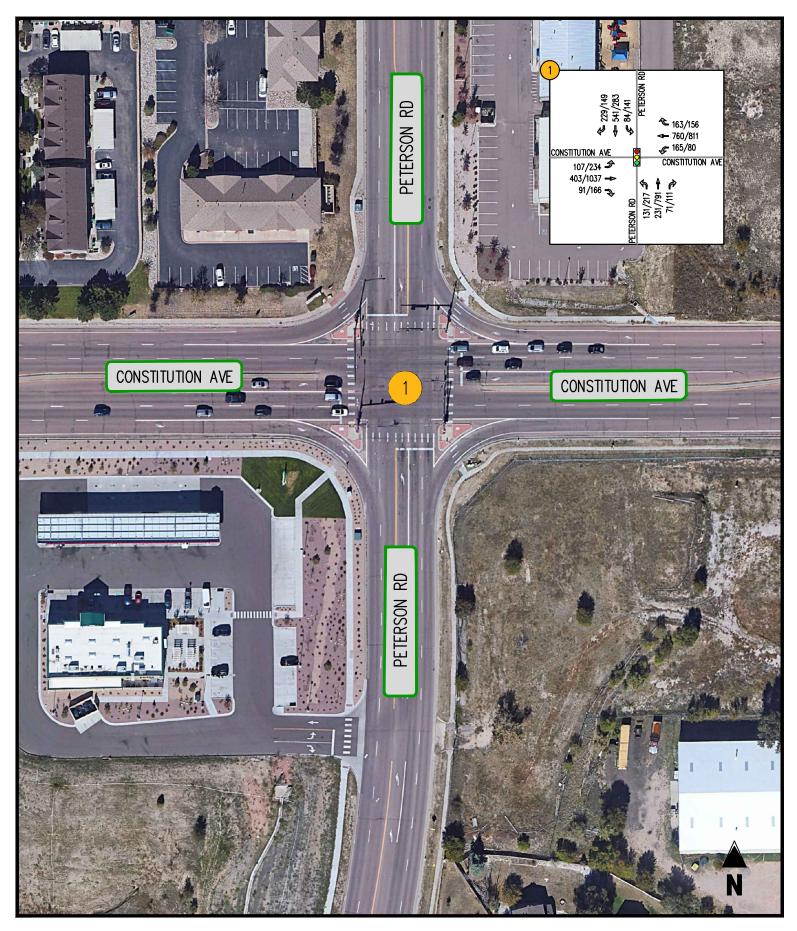

## FIGURE 2 Existing Volumes

0000/0000 (AM PEAK HOUR/PM PEAK HOUR)





JDA El Paso County, CO

## TRIP GENERATION

Trip generation forecasts for the site were based on rates/equations published in the Institute of Transportation Engineers (ITE) Trip Generation Manual, 11th Edition and industry standard methodologies. The trip generation of the proposed development are provided in Table 1 below. The use is expected to generate 11 AM peak hour, 16 PM peak hour, and 170 average daily trips upon completion.

These trips would be divided among the two access points along Peterson Road and Canada Drive. This would represent less than 10 vehicles at any site entrance in or out of the site during the peak hour. As required by the County, an assessment of 20 year projections for this area would suggest minimal increase. Limited development or redevelopment options exist in the area that would increase traffic at the proposed entrances. It is anticipated that short and long range forecasts at the entrance would remain relatively consistent with existing conditions.

As mentioned above, the Applicant is proposing one RIRO movement access to the site via Peterson Road and one full movement access to the site via Canada Drive. Currently, Constitution Avenue has auxiliary lanes in both the east and westbound directions at the Canada Drive intersection. Based on the trip generation contained herein, the proposed development would not significantly impact the surrounding corridor.

## **PROPOSED ACCESS LOCATIONS**

As shown in Attachment I, the project proposes a full movement access along Canada Drive and a rightin/right-out access along Peterson Road. As shown in Table 1, the site would generate very few peak hour trips. Assuming some distribution of trips to the entrances, the accesses and surrounding intersections would experience fewer than 5 peak hour turning movements at any location. The access at Peterson Road was requested to be specifically addressed. Due to the low traffic to the proposed site the entrance would operate exceptionally during all times. No conflicts with the nearby signalized intersection at Peterson Road and Constitution Avenue would occur. The proposed right-in/right-out entrance would draw from the same lane as the northbound right at the signal.

The signal of Peterson Rd & Constitution Ave was modeled in Synchro using the volumes from Figure 2. The Synchro reports have been attached to this memo. The 95% queue for the northbound right turn movement, as reported by Synchro, will extend 2 feet in the AM peak hour and 36 feet in the PM peak hour. As the proposed access along Peterson Rd will be situated approximately 250 feet south of the signal, there is little chance of the northbound right turn queue blocking the access.

## SAFETY

As requested by the County, accident data in the area was pulled as provided by the State. As shown in Figure 3 below, no accidents were reported in this area for the last 10 years. Due to the extremely low generation of trips the proposed use represents it is not anticipated to have an impact on safety to this area.



Figure 3 – Police Accident Data Map 2016-2022

Considerations for sight distance were also made at the proposed access along Peterson Road. Sight distance triangles are provided in Attachment 1. As shown on Attachment 1, sight distance at the intersection is available well beyond the required length due to the gradual curve in the roadway. No safety concerns are anticipated with the approval of the access along Peterson Road.

An autoturn analysis is also provided in Attachment 1. A WB 67 – Interstate Semi Trailer was utilized for this analysis. Although this vehicle is unlikely to ever be onsite it is the largest vehicle allowed on Colorado roads. Per CDOT freight and permitting specifications, "Colorado's legal height limit is 14 foot 6 inches. All state highway structures with less than 14-foot, 6-inch vertical clearance may be found on the Vertical Clearances Map. Maximum width is 8'6" and legal weight is 80,000 pounds combined gross vehicle weight (GVW) on Interstate and 85,000 pounds on Non-Interstate highways. There is no overall length requirement for truck tractor semitrailer combinations as long as the trailer does not exceed 57 feet 4 inches." The WB 67 is the worst case vehicle for Colorado State roads and therefore was selected for the analysis.

## CONCLUSIONS

The conclusions of this analysis are as follows:


- 1. The subject site is a standalone project in the County of El Paso, Colorado.
- 2. The proposed project is forecasted to generate 11 new AM trips, 16 new PM trips, and 170 new daily trips on average.
- 3. Auxiliary lanes current exists in both the east and westbound directions on Constitution Avenue at Canada Drive.
- 4. Based on the trip generation contained herein, the proposed mini warehouse use development would not significantly impact the surrounding roadways. Short and long range forecasts for the access locations would remain generally consistent with existing conditions.
- 5. No improvements are required or recommended above and beyond what is required on site for the construction of the use.

- 6. No safety concerns are anticipated with the approval of the access locations as shown.
- 7. Road Impact Fees will be due by the Applicant at the last land use approval consistent with the use and Impact Fee schedule.

We trust that the information contained herein satisfy the request of the County of El Paso, Colorado. If you have any questions or need further information, please contact Brian Horan at BrianHoran@GallowayUS.com or 303-770-8884.

## Attachment I Site Plan Synchro Reports

H: Johnson Development Associates \CO. Colorado Springs - Constitution Ave SS\0CIV2-Plan\JDA02\_DP-2 Site C1.1.dwg - Craig Dold - 9/15/2022

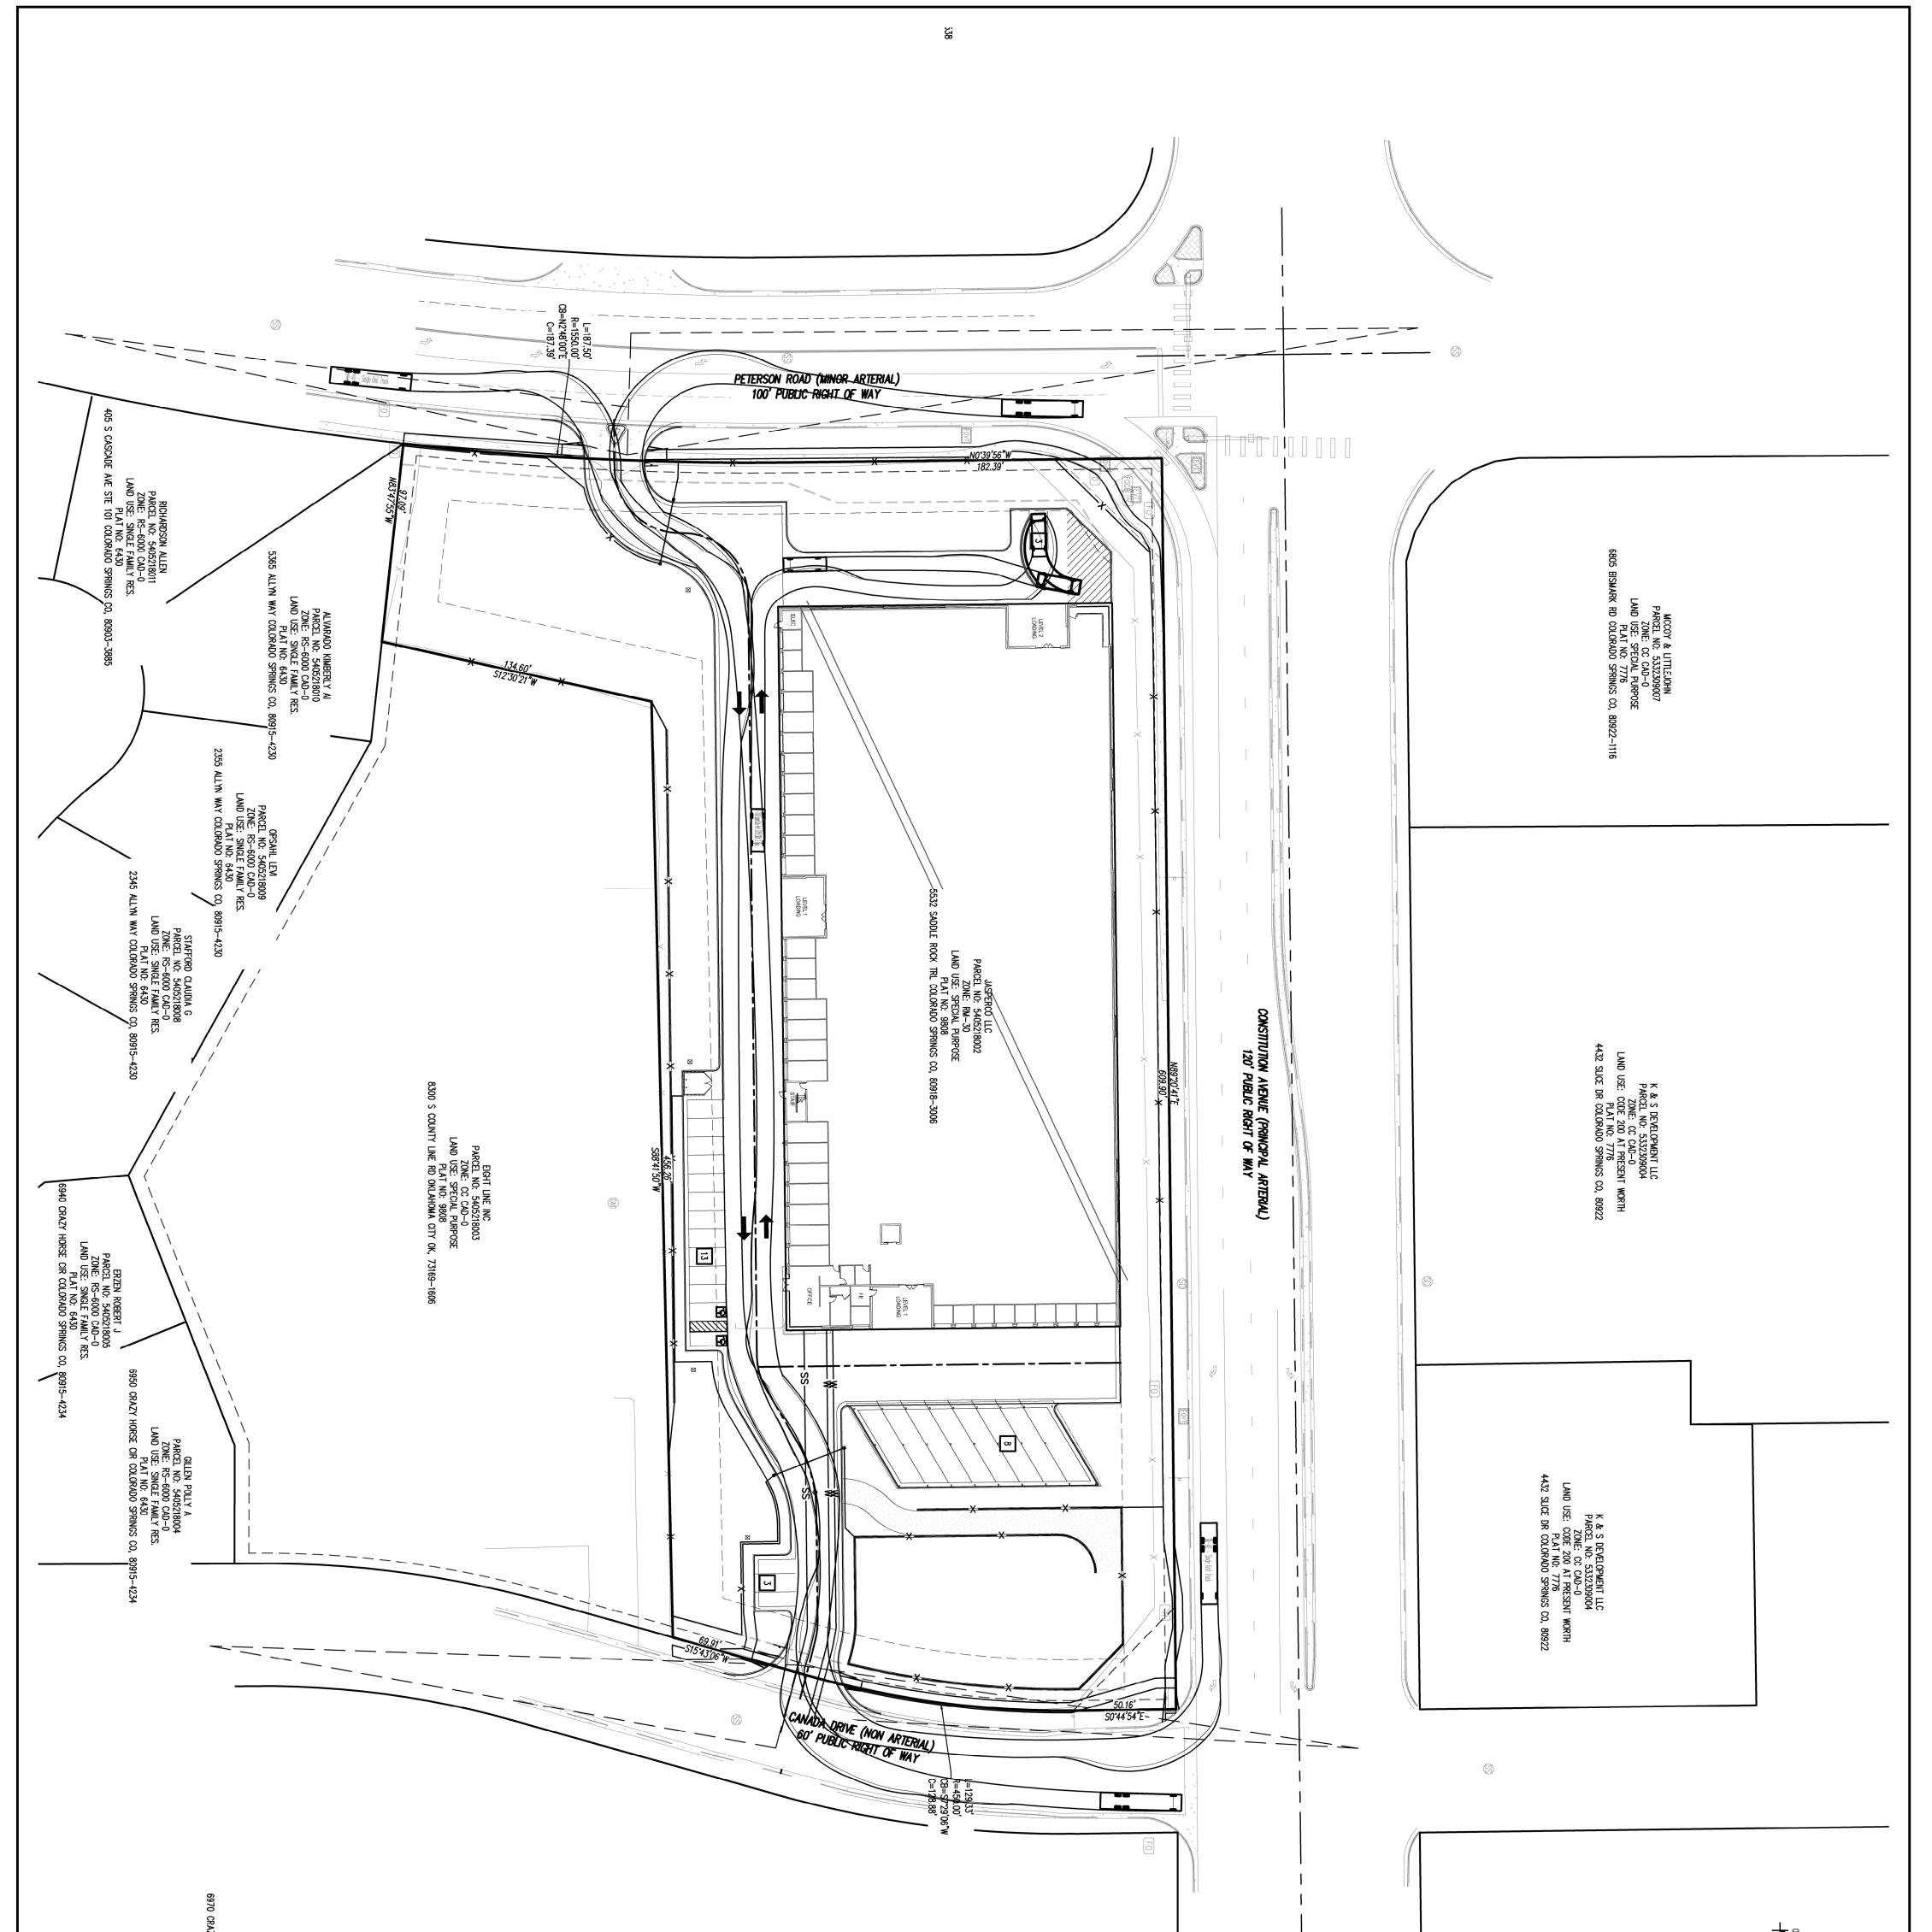



Π	
Сп	J
Ē	
1	
<	
п	
Η.	
5	
C	J
Ť	
-	
$\leq$	
Π	
ш	
2	
_	
	1
Τ	J
ì	
L	
丆	>
7	


SITE DEVELOPMENT PLAN	Date: 4/22/2	Checked By:	Drawn By:	Project No: JD	
AN	4/22/2022	BAS	RWO	JDA02	


	-	-	1	·					#
									Date
									Issue / Description
									Init.

# SITE DEVELOPMENT PLAN CONSTITUTION STORAGE

JOHNSON DEVELOPMENT ASSOCIATES

6855 CONSTITUTION AVENUE COLORADO SPRINGS, CO 80915







1155 Kelly Johnson Blvd., Suite 305 Colorado Springs, CO 80920 719.900.7220 GallowayUS.com





SITE LEGEND

- WHERE A PROPOSED UTILITY CROSSES AN EXISTING UTILITY, IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF SUCH EXISTING UTILITY, EITHER THROUGH POTHOLING OR ALTERNATIVE METHOD. REPORT INFORMATION TO THE ENGINEER PRIOR TO CONSTRUCTION.
   PLANNING AND COMMUNITY DEVELOPMENT DIRECTOR:


ELLIS EMANUEL PARCEL NO: 54052 ZONE: RS-6000 C LAND USE: SINGLE FA PLAT NO: 643 r HORSE CIR COLORADO S

- hat'sbel⊙w. │before you dig.
  - "Proximate location only. It is the contr. Sponsibility to field verify the location o Blic or private, whether shown on the pl 10r to construction. Report any discrepa Gineer Prior to construction.
- y Maps Provided Field Surface ) be considered an vitractor's n of all utilities, epanciesto the k
- CAUTION - NOTICE TO CONTRACTOR

- - ◀ ▮ → EXISTING FIBER OPTIC
    PROPOSED ROAD CENTERLINE
    PROPOSED STORM PIPE
    PROPOSED CURB & GUTTER
    PROPOSED SIDEWALK
    PROPOSED ADA ROUTE
    PROPOSED BUILDING
    EXISTING CONCRETE PAVING
    EXISTING FIBER OPTIC STRUCTURES
    EXISTING FIBER OPTIC STRUCTURES
    EXISTING LIGHT POLE
    EXISTING STORM SEWER MANHOLE
    EXISTING STORM STGN STING FENCE STING CURB & GUTTER STING WATER LINE STING SANITARY SEWER STING SANITARY SEWER STING UNDERGROUND ELECTRIC STING GAS

    - existing sign existing gas meter existing sanitary sewer existing electric structures existing water valve ada parking symbol proposed sign proposed sign proposed sign proposed sanitary sewer proposed water valve proposed light pole proposed sewer manhole proposed water structures proposed storm structures





I

EXISTING EASEMENT LINE

posed easement line posed swale flowline sting landscape buffer

PROPERTY BOUNDARY LINE
ADJACENT PROPERTY BOUNDARY LINE
ADJACENT LOT LINE
RIGHT OF WAY BOUNDARY LINE
EXISTING BUILDING

## Existing AM Peterson Rd & Constitution Ave

	≯	+	1	4	Ļ	•	1	Ť	1	*	ţ	~
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group Flow (vph)	116	438	99	179	826	177	142	251	77	91	588	249
v/c Ratio	0.29	0.35	0.15	0.31	0.63	0.25	0.55	0.29	0.16	0.23	0.74	0.58
Control Delay	16.0	29.6	2.2	15.7	33.6	4.6	33.4	36.9	0.9	25.8	49.3	29.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	16.0	29.6	2.2	15.7	33.6	4.6	33.4	36.9	0.9	25.8	49.3	29.4
Queue Length 50th (ft)	41	130	0	66	273	0	74	82	0	46	224	103
Queue Length 95th (ft)	80	175	17	118	342	46	113	115	2	77	271	179
Internal Link Dist (ft)		691			661			589			420	
Turn Bay Length (ft)	250			250			230		50	160		50
Base Capacity (vph)	404	1253	648	576	1312	698	277	897	502	503	958	500
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.29	0.35	0.15	0.31	0.63	0.25	0.51	0.28	0.15	0.18	0.61	0.50
Intersection Summary												

## Existing AM Peterson Rd & Constitution Ave

	۲	-	7	4	+	*	1	1	1	4	ţ	~
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	٦	<b>††</b>	1	٦	- ++	1	7	<b>††</b>	1	ሻ	- ++	1
Traffic Volume (veh/h)	107	403	91	165	760	163	131	231	71	84	541	229
Future Volume (veh/h)	107	403	91	165	760	163	131	231	71	84	541	229
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	4070	No	4070	4070	No	4070	4070	No	4070	4070	No	4070
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	116	438	0	179	826	0	142	251	0	91	588	0
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	441	1630 0.46	0.00	624	1689	0.00	235	795 0.22	0.00	344	710	0.00
Arrive On Green	0.10 1781	0.46 3554		0.11	0.48	0.00	0.08			0.06 1781	0.20	
Sat Flow, veh/h			1585	1781	3554	1585	1781	3554	1585		3554	1585
Grp Volume(v), veh/h	116	438	0	179	826	0	142	251	0	91	588	0
Grp Sat Flow(s),veh/h/ln	1781	1777	1585	1781	1777	1585	1781	1777	1585	1781	1777	1585
Q Serve(g_s), s	3.7	9.1	0.0	5.7	19.1	0.0	7.5	7.1	0.0	4.8	19.0	0.0
Cycle Q Clear(g_c), s	3.7	9.1	0.0	5.7	19.1	0.0	7.5	7.1	0.0	4.8	19.0	0.0
Prop In Lane	1.00 441	1630	1.00	1.00 624	1689	1.00	1.00 235	795	1.00	1.00 344	710	1.00
Lane Grp Cap(c), veh/h V/C Ratio(X)	44 I 0.26	0.27		0.29	0.49		235	0.32		0.26	0.83	
Avail Cap(c_a), veh/h	441	1630		624	1689		294	0.32 814		521	962	
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	14.2	20.1	0.00	12.7	21.5	0.00	35.5	38.9	0.00	35.2	46.0	0.00
Incr Delay (d2), s/veh	1.5	0.4	0.0	1.2	1.0	0.0	2.5	0.2	0.0	0.4	4.5	0.0
Initial Q Delay(d3),s/veh	0.0	0.4	0.0	0.0	0.0	0.0	0.0	0.2	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	1.6	3.7	0.0	2.3	7.7	0.0	3.4	3.1	0.0	2.1	8.8	0.0
Unsig. Movement Delay, s/veh		0.1	0.0	2.0	1.1	0.0	0.4	0.1	0.0	2.1	0.0	0.0
LnGrp Delay(d),s/veh	15.7	20.5	0.0	13.9	22.5	0.0	38.0	39.1	0.0	35.6	50.6	0.0
LnGrp LOS	В	C	0.0	B	C	0.0	D	D	0.0	D	D	0.0
Approach Vol, veh/h		554	А		1005	А		393	А		679	A
Approach Delay, s/veh		19.5			21.0	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		38.7	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		48.5	7.
Approach LOS		B			C			D			D	
	1		2	1	-	6	7				_	
Timer - Assigned Phs Phs Duration (G+Y+Rc), s	11.1	<u>2</u> 31.4	<u>3</u> 18.0	<u>4</u> 59.5	<u>5</u> 14.0	<u>6</u> 28.5	7 16.0	<u>8</u> 61.5				
Change Period (Y+Rc), s	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s	18.5	27.5	13.5	42.5	13.5	32.5	4.5	4.5				
Max Q Clear Time (g_c+l1), s	6.8	9.1	7.7	42.5	9.5	21.0	5.7	21.1				
Green Ext Time (p_c), s	0.0	1.4	0.2	2.8	0.1	21.0	0.1	5.5				
								5.0				
Intersection Summary			20.4									
HCM 6th Ctrl Delay			30.4									
HCM 6th LOS			С									

## Notes

Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.

# Existing PM Peterson Rd & Constitution Ave

	٦	<b>→</b>	7	4	+	*	1	t	1	\$	Ļ	~
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group Flow (vph)	254	1127	180	87	882	170	236	860	121	153	308	162
v/c Ratio	0.73	0.76	0.24	0.44	0.74	0.26	0.55	0.87	0.22	0.71	0.36	0.31
Control Delay	35.5	33.8	4.5	23.8	39.9	4.8	29.8	52.2	5.1	44.7	38.8	5.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	35.5	33.8	4.5	23.8	39.9	4.8	29.8	52.2	5.1	44.7	38.8	5.8
Queue Length 50th (ft)	118	384	4	34	316	0	122	330	0	75	104	0
Queue Length 95th (ft)	#242	470	47	62	394	44	186	412	36	#152	146	44
Internal Link Dist (ft)		691			661			589			420	
Turn Bay Length (ft)	250			250			230		50	160		50
Base Capacity (vph)	350	1483	763	198	1188	649	441	1017	552	219	880	526
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.73	0.76	0.24	0.44	0.74	0.26	0.54	0.85	0.22	0.70	0.35	0.31

## Intersection Summary

# 95th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

## Existing PM Peterson Rd & Constitution Ave

	۶	-	7	•	+	*	1	1	1	1	Ŧ	4
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	<b>††</b>	1	٦	<b>^</b>	1	٦	<b>††</b>	1	٦	<b>^</b>	1
Traffic Volume (veh/h)	234	1037	166	80	811	156	217	791	111	141	283	149
Future Volume (veh/h)	234	1037	166	80	811	156	217	791	111	141	283	149
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	1070	No	1070	1070	No	1070	4070	No	4070	1070	No	1070
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	254	1127	0	87	882	0	236	860	0	153	308	0
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	401	1586	0.00	251	1290	0.00	438	955	0.00	227	834	0.00
Arrive On Green	0.14	0.45	0.00	0.05	0.36	0.00	0.11	0.27	0.00	0.08	0.23	0.00
Sat Flow, veh/h	1781	3554	1585	1781	3554	1585	1781	3554	1585	1781	3554	1585
Grp Volume(v), veh/h	254	1127	0	87	882	0	236	860	0	153	308	0
Grp Sat Flow(s),veh/h/ln	1781	1777	1585	1781	1777	1585	1781	1777	1585	1781	1777	1585
Q Serve(g_s), s	9.6	30.9	0.0	3.6	25.2	0.0	11.7	28.0	0.0	7.7	8.7	0.0
Cycle Q Clear(g_c), s	9.6	30.9	0.0	3.6	25.2	0.0	11.7	28.0	0.0	7.7	8.7	0.0
Prop In Lane	1.00	4500	1.00	1.00	4000	1.00	1.00	055	1.00	1.00	004	1.00
Lane Grp Cap(c), veh/h	401	1586		251	1290		438	955		227	834 0.37	
V/C Ratio(X)	0.63 401	0.71 1586		0.35 251	0.68 1290		0.54 464	0.90 1022		0.68 242	0.37 880	
Avail Cap(c_a), veh/h HCM Platoon Ratio	1.00	1.00	1.00	1.00	1290	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	21.5	26.9	0.00	23.6	32.4	0.00	28.6	42.3	0.00	33.8	38.5	0.00
Incr Delay (d2), s/veh	7.4	20.9	0.0	3.8	3.0	0.0	1.1	10.4	0.0	6.7	0.3	0.0
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	4.5	12.9	0.0	1.7	10.9	0.0	5.1	13.4	0.0	3.7	3.8	0.0
Unsig. Movement Delay, s/veh		12.5	0.0	1.7	10.5	0.0	0.1	10.4	0.0	0.7	0.0	0.0
LnGrp Delay(d),s/veh	28.9	29.7	0.0	27.4	35.3	0.0	29.7	52.7	0.0	40.5	38.8	0.0
LnGrp LOS	20.0 C	C	0.0	C	D	0.0	C	D	0.0	D	D	0.0
Approach Vol, veh/h	<u> </u>	1381	А	<u> </u>	969	А	<u> </u>	1096	А		461	А
Approach Delay, s/veh		29.5	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		34.6	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		47.8	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		39.3	7
Approach LOS		C			C			D			D	
••	4		2	4		0	7				2	
Timer - Assigned Phs	14.0	2	3	<u> </u>	10.2	6	7	8				
Phs Duration (G+Y+Rc), s	14.2 4.5	36.8	11.0	58.1	18.3	32.7	21.0	48.1				
Change Period (Y+Rc), s		4.5	4.5	4.5	4.5	4.5	4.5	4.5				
Max Green Setting (Gmax), s Max Q Clear Time (g_c+I1), s	10.7 9.7	34.5 30.0	6.5 5.6	50.3 32.9	15.5 13.7	29.7 10.7	16.5 11.6	40.3 27.2				
Green Ext Time (p_c), s	9.7 0.0	2.2	0.0	32.9 7.1	0.1	10.7	0.3	4.6				
, , , , , , , , , , , , , , , , , , ,	0.0	2.2	0.0	1.1	0.1	1.0	0.5	4.0				
Intersection Summary												
HCM 6th Ctrl Delay			37.1									
HCM 6th LOS			D									

## Notes

Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.



**Planning and Community Development Department** 2880 International Circle Colorado Springs, Colorado 80910 Phone: 719.520.6300 Fax: 719.520.6695 Website www.elpasoco.com

## DEVIATION REQUEST AND DECISION FORM

Updated: 6/26/2019

#### **PROJECT INFORMATION**

Project Name :	6855 Constitution Avenue- Self Storage
Schedule No.(s) :	5405218002
Legal Description :	Lot 1, Eight Line Subdivision

#### **APPLICANT INFORMATION**

Company :	Johnson Development Associates
Name :	Brian Kearney
	🛛 Owner 🛛 Consultant 🔲 Contractor
Mailing Address :	100 Dunbar Street, Suite 400
	Spartanburg, SC 29306
Phone Number :	864-529-1297
FAX Number :	
Email Address :	bkearney@johnsondevelopment.net

#### ENGINEER INFORMATION

Company :	Galloway		
Name :	Brian Horan	Colorado P.E. Number :	0053042
Mailing Address :	5500 Greenwood Plaza Blvd, Suite 200		
	Greenwood Village, CO 80111		
Phone Number :	303-770-8884		
FAX Number :			
Email Address :	BrianHoran@GallowayUS.com		

## **OWNER, APPLICANT, AND ENGINEER DECLARATION**

To the best of my knowledge, the information on this application and all additional or supplemental documentation is true, factual and complete. I am fully aware that any misrepresentation of any information on this application may be grounds for denial. I have familiarized myself with the rules, regulations and procedures with respect to preparing and filing this application. I also understand that an incorrect submittal will be cause to have the project removed from the agenda of the Planning Commission, Board of County Commissioners and/or Board of Adjustment or delay review until corrections are made, and that any approval of this application is based on the representations made in the application and may be revoked on any breach of representation or condition(s) of approval

Our the	6-10-22
Signature of owner (or authorized representative)	Date
Engineer's Seal, Signature	
And Date of Signature	
6-10-22 6-10-22	
Page 1 of 7	PCD File No.
Solution States and St	PCD File No.

DEVIATION REQUEST (Attach diagrams, figures, and other documentation to clarify request)

A deviation from the standards of or in Section 2.4.1. F. 2. of the Engineering Criteria Manual (ECM) is requested.

Identify the specific ECM standard which a deviation is requested:

## 2.4.1 F. Access Clearance from Intersections.

**2.** Commercial. Access to commercial or industrial properties fronting collector or local roads shall be located a minimum of 50 feet from the point of curvature or point of tangency of the curb line at the intersection. Access to commercial or industrial parcels fronting Nonresidential Collector roadways shall be located a minimum of 115 - 480 feet from the point of curvature or point of tangency of the curb line at the intersection depending on the sight distance and location with respect to the intersection, intersection control, and posted speed.

In all cases, a minimum corner clearance of 50 feet shall be provided. If the minimum corner clearance cannot be attained, the ECM Administrator may require investigation to determine if left turns should be prohibited into or out of the access point. For proposed access points near stop or signalized intersections, the ECM Administrator will require studies to determine if stopping queues will block the access point and if left turns should be prohibited into or out of the access point.

State the reason for the requested deviation:

A deviation from the above is requested for the access located along Peterson Road. Peterson Road has a posted speed limit of 35 mph and therefore would require a minimum of 250' from adjacent intersections per Table 2-33 within Chapter 2 of the ECM. The access is being shown as a right-in/right-out (RIRO) located 200' from the signalized intersection of Peterson Road/Constitution Avenue to the north. Therefore, a deviation of 50' from the standard is being requested. The access is located nearest to the standard as can be geometrically provided.

Explain the proposed alternative and compare to the ECM standards (May provide applicable regional or national standards used as basis):

The proposed access would be located within 50' of the standard. The access is proposed to be RIRO to alleviate any concern that the deficient access spacing would cause.

#### LIMITS OF CONSIDERATION

(At least one of the conditions listed below must be met for this deviation request to be considered.)

 $\hfill\square$  The ECM standard is inapplicable to the particular situation.

Topography, right-of-way, or other geographical conditions or impediments impose an undue hardship and an equivalent

alternative that can accomplish the same design objective is available and does not compromise public safety or accessibility. A change to a standard is required to address a specific design or construction problem, and if not modified, the standard will impose an undue hardship on the applicant with little or no material benefit to the public.

#### Provide justification:

A number of factors contribute to the justification of this request.

- 1. The access is proposed restricted to RIRO eliminating the majority of the conflict points related to this access.
- 2. The access is being located as far from the nearest intersection as possible considering the available frontage of the site and onsite constraints including location of the detention pond.
- 3. The proposed RIRO is located across from an existing access which will minimize perceived offset intersection conflicts although none exist due to the proposed access being restricted to RIRO.
- 4. No queueing at the nearby signal is anticipated to conflict with the proposed access as the northbound right lane operates as a free-flow with dedicated lane condition.

#### CRITERIA FOR APPROVAL

Per ECM section 5.8.7 the request for a deviation may be considered if the request is <u>not based exclusively on financial</u> <u>considerations</u>. The deviation must not be detrimental to public safety or surrounding property. The applicant must include supporting information demonstrating compliance with <u>all of the following criteria</u>:

The deviation will achieve the intended result with a comparable or superior design and quality of improvement.

The deviation will achieve the intended result with a comparable or superior design and quality of improvement. This is achieved by physically restricting the access movements to alleviate any safety concerns.

The deviation will not adversely affect safety or operations.

The deviation will not adversely affect safety or operations. Traffic memorandum suggests projected AM/PM peak hour trips to be 11/16 trips respectively. Site generated traffic will not adversely affect safety or operations. Development would not significantly impact surrounding roadways.

#### The deviation will not adversely affect maintenance and its associated cost.

The deviation will not adversely affect maintenance and its associated cost. The proposed alternative represent no impact to maintenance or cost from the standard.

The deviation will not adversely affect aesthetic appearance.

The deviation will not adversely affect aesthetic appearance. The proposed alternative represents no impact to the aesthetic appearance from the standard.

The deviation meets the design intent and purpose of the ECM standards.

The deviation meets the design intent and purpose of the ECM standards.

The deviation meets the control measure requirements of Part I.E.3 and Part I.E.4 of the County's MS4 permit, as applicable. The deviation meets the control measure requirements of Part I.E.3 and Part I.E.4 of the County's MS4 permit, as applicable.

PCD File No. \_\_\_\_\_

## **REVIEW AND RECOMMENDATION:**

#### Approved by the ECM Administrator

This request has been determined to have mereby granted based on the justification pro	et the criteria for approval. A deviation from Section vided.	of the ECM is
Г	г	
L	L	
Denied by the ECM Administrator This request has been determined not to hav hereby denied.	re met criteria for approval. A deviation from Section	of the ECM is
Г	٦	
L	L	

## ECM ADMINISTRATOR COMMENTS/CONDITIONS:

## 1.1. PURPOSE

The purpose of this resource is to provide a form for documenting the findings and decision by the ECM Administrator concerning a deviation request. The form is used to document the review and decision concerning a requested deviation. The request and decision concerning each deviation from a specific section of the ECM shall be recorded on a separate form.

## 1.2. BACKGROUND

A deviation is a critical aspect of the review process and needs to be documented to ensure that the deviations granted are applied to a specific development application in conformance with the criteria for approval and that the action is documented as such requests can point to potential needed revisions to the ECM.

## 1.3. APPLICABLE STATUTES AND REGULATIONS

Section 5.8 of the ECM establishes a mechanism whereby an engineering design standard can be modified when if strictly adhered to, would cause unnecessary hardship or unsafe design because of topographical or other conditions particular to the site, and that a departure may be made without destroying the intent of such provision.

## 1.4. APPLICABILITY

All provisions of the ECM are subject to deviation by the ECM Administrator provided that one of the following conditions is met:

- The ECM standard is inapplicable to a particular situation.
- Topography, right-of-way, or other geographical conditions or impediments impose an undue hardship on the applicant, and an equivalent alternative that can accomplish the same design objective is available and does not compromise public safety or accessibility.
- A change to a standard is required to address a specific design or construction problem, and if not
  modified, the standard will impose an undue hardship on the applicant with little or no material benefit to
  the public.

## 1.5. TECHNICAL GUIDANCE

The review shall ensure all criteria for approval are adequately considered and that justification for the deviation is properly documented.

## 1.6. LIMITS OF APPROVAL

Whether a request for deviation is approved as proposed or with conditions, the approval is for project-specific use and shall not constitute a precedent or general deviation from these Standards.

## 1.7. REVIEW FEES

A Deviation Review Fee shall be paid in full at the time of submission of a request for deviation. The fee for Deviation Review shall be as determined by resolution of the BoCC.