SITE PLAN 5935 TEMPLETON GAP ROAD

LOCATED IN THE SOUTHEAST QUARTER OF SECTION 13, TOWNSHIP 13 SOUTH, RANGE 66 WEST OF THE 6TH PRINCIPAL MERIDIAN, EL PASO COUNTY, COLORADO

LEGEND PROPERTY LINE ----- EASEMENT LINE ----- LOT LINE — — — BUILDING SETBACK LINE ----- ADJACENT PROPERTY LINE **EXISTING** — INTERMEDIATE CONTOUR — — -84- — INTERMEDIATE CONTOUR **CONCRETE AREA** ─o o SIGN ASPHALT AREA ——w——w—— WATER LINE ——w ₩ WATER VALVE CURB AND GUTTER ——w——w FIRE HYDRANT -----OHE------OVEHEAD ELEC LINE ------FIBER OPTIC LINE TELECOMMUNICATIONS VAULT ———×——— GAS LINE BARBED WIRE FENCE **REGULATORY SIGN** ABBREVIATION LEGEND CONC CONCRETE CURB & GUTTER EASEMENT MATCH EXISTING PLAT BOOK, PAGE PAVEMENT PVMT RETAINING WALL RECEPTION NUMBER RIGHT-OF-WAY SQUARE FOOT UTIL UTILITY \$ 89°59'56" W 390.23' CATCH CURB SPILL CURB SITE LOCATION MAP

(SEE SITE PLAN ON PAGE 2 FOR SITE DETAILS)

SITE DATA

OWNER
GREAT WEST CONSTRUCTION
PROPERTIES LLC
5935 TEMPLETON GAP ROAD
COLORADO SPRINGS, CO 80923
LAN

5935 TEMPLETON GAP ROAD COLORADO SPRINGS, CO 80923 (719) 380 - 8100

M.V.E., INC. 1903 LELARAY STREET, SUITE 200 COLORADO SPRINGS, CO 80909 (719) 635 - 5736

ZONING
AGRICULTURE (A-5)
COMMERCIAL AIRPORT OVERLAY DISTRICT

TAX SCHEDULE NO. 63130 - 00 - 009

PROPERTY ADDRESS

EXISTING COVERAGE DATA

TOTAL AREA:

 BUILDINGS:
 8,023 SF
 1.6%

 PAVEMENT (DRIVE/WALK):
 7,616 SF
 3.5%

 LANDSCAPING:
 93,911 SF
 43.1%

 STAGING AREA
 108,250 SF
 49.7%

PROPOSED COVERAGE DATA

 BUILDINGS:
 8,023 SF
 1.6%

 PAVEMENT (DRIVE/PARKING/WALK):
 31,300 SF
 14.4%

 LANDSCAPING:
 91,789 SF
 42.2%

 STAGING AREA
 86,688 SF
 39.8%

TOTAL AREA: 217,800 SF 100.0% = 5.0± ACRES

217,800 SF 100.0% = 5.0± ACRES

PROPOSED DISTURBANCE DATA

AREA TO BE DISTURBED = 30,000 SF

PARKING SCHEDULE

REQUIRED:
OFFICE = 1300 SF
1 SPACE PER 200 SF = 7 SPACES
INCLUDING VAN ACCESSIBLE ADA SPACE = 1
TOTAL SPACES REQUIRED = 7

PROVIDED:
STANDARD SPACES = 11
VAN ACCESSIBLE ADA SPACE = 1
TOTAL SPACES PROVIDED = 12

BUILDING TYPE

OFFICE BUILDING AREA - 2400 SF TWO STORY - TYPE V-B NON - SPRINKLED (NS)

BUILDING HEIGHT

ALLOWED MAXIMUM BUILDING HEIGHT = 25'-0" ACTUAL BUILDING HEIGHT = 17'-4" TO 18'-0"

SETBACKS 25' FRONT 25' SIDE 25' REAR

LAND DESCRIPTION


A TRACT IN THE SE 1/4 OF SECTION 13, TOWNSHIP 13 SOUTH, RANGE 66 WEST OF THE SIXTH PRINCIPAL MERIDIAN, EL PASO COUNTY COLORADO DESCRIBED AS FOLLOWS: COMMENCING AT THE POINT OF INTERSECTION OF THE SOUTHERLY RIGHT OF WAY LINE OF HIGHWAY 189 WITH THE NORTH LINE OF TEMPLETON HEIGHTS SUBDIVISION, THENCE NORTHERLY ON SAID RIGHT OF WAY LINE FOR 726.61 FEET TO THE POINT OF BEGINNING FOR SAID TRACT; THENCE CONTINUE ALONG THE SAME COURSE FOR 301 FEET; ANGLE RIGHT 90° (SOUTHERLY) 847.84 FEET TO THE NORTH LINE OF AFOREMENTIONED TRACT; THENCE WESTERLY ALONG SAID NORTH LINE FOR 390.23 FEET, THENCE NORTHERLY 599.50 FEET TO SAID POINT OF BEGINNING.

ROAD IMPACT FEE

THE OWNER AGREES ON BEHALF OF HIM/HERSELF AND ANY DEVELOPER OR BUILDER, SUCCESSORS AND/OR ASSIGNS THAT SUBDIVIDER AND/OR SAID SUCCESSORS OR ASSIGNS SHALL BE REQUIRED TO PAY TRAFFIC IMPACT FEES IN ACCORDANCE WITH THE EL PASO COUNTY ROAD IMPACT FEE PROGRAM RESOLUTION (RESOLUTION NO. 19-471), ANY AMENDMENTS THERETO, AT OR PRIOR TO THE TIME OF BUILDING PERMIT SUBMITTALS. THE FEE OBLIGATION, IF NOT PAID AT FINAL PLAT RECORDING, SHALL BE DOCUMENTED ON ALL SALES DOCUMENTS AND ON PLAT NOTES TO ENSURE THAT A TITLE SEARCH WOULD FIND THE FEE OBLIGATION BEFORE SALE OF THE PROPERTY.


DEVELOPMENT NOTES

- 1. NO DOMESTIC WATER OR SEWER SERVICE PROVIDED. WELL AND SEPTIC IN PLACE.
- NATURAL GAS SERVICE PROVIDED BY COLORADO SPRINGS UTILITIES.
 ELECTRIC SERVICE PROVIDED BY COLORADO SPRINGS UTILITIES.
- 4. FIRE SERVICE PROVIDED BY COLORADO SPRINGS FIRE DEPARTMENT.
- 5. NO PERMANENT OUTDOOR STORAGE UNDER THIS DEVELOPMENT APPLICATION.

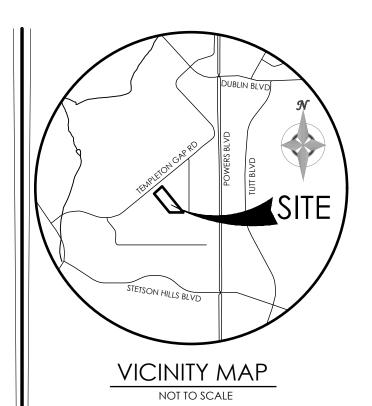

BENCHMARK







REVISIONS

DESIGNED BY
DRAWN BY
CHECKED BY _____
AS-BUILTS BY
CHECKED BY _____

5935 TEMPLETON GAP ROAD

SITE PLAN

SP-1

MVE PROJECT 6120

JULY 1, 2024 SHEET 1 OF 3

ADA NOTE

THE PARTIES RESPONSIBLE FOR THIS PLAN HAVE FAMILIARIZED THEMSELVES WITH ALL CURRENT ACCESSIBILITY CRITERIA AND SPECIFICATIONS AND THE PROPOSED PLAN REFLECTS ALL SITE ELEMENTS REQUIRED BY THE APPLICABLE ADA DESIGN STANDARDS AND GUIDELINES AS PUBLISHED BY THE UNITED STATES DEPARTMENT OF JUSTICE. APPROVAL OF THIS PLAN BY EL PASO COUNTY DOES NOT ASSURE COMPLIANCE WITH THE ADA OR ANY REGULATIONS OR GUIDELINES ENACTED OR PROMULGATED UNDER OR WITH RESPECT TO SUICH LAWS.

FLOODPLAIN STATEMENT

NO PORTION OF THE SUBJECT PROPERTY IS LOCATED WITHIN FEMA DESIGNATED SPECIAL FLOOD HAZARD AREA (SFHA'S) AS INDICATED ON THE FLOOD INSURANCE RATE MAP (FIRM) FOR EL PASO COUNTY, COLORADO AND INCORPORATED AREAS - MAP NUMBER 08041C0536G, EFFECTIVE DECEMBER 7, 2018.

LEGEND

PROPERTY LINE

- EASEMENT LINE

SHRUBS: CUT AND REMOVE

BURLAP FROM THE TOP 1/2 OF ROOTBALL. REMOVE ALL WIRE.

Shrub Planting Detail

SITE PLAN


5935 TEMPLETON GAP ROAD

JON WALSH,

LANDSCAPE ARCHITECT


Palmer Lake, CO 80133 (719) 640-9428 jwlandarch@gmail.com www.jwlandscapearchitect.com




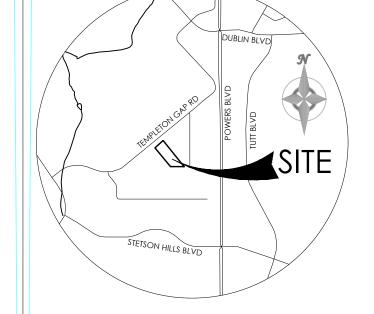

VICINITY MAP

BENCHMARK

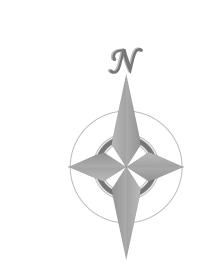

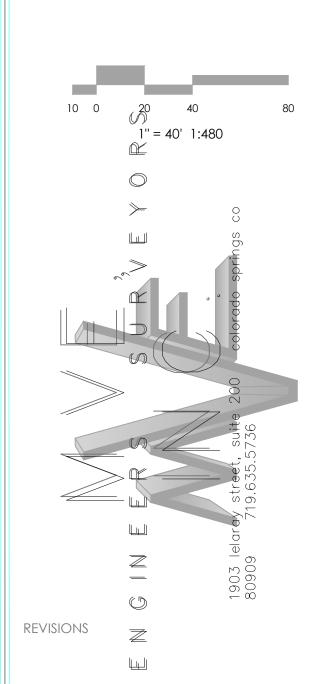


DESIGNED BY DRAWN BY CHECKED BY AS-BUILTS BY CHECKED BY

5935 TEMPLETON GAP ROAD


SITE PLAN

MVE DRAWING

JULY 31, 2024 SHEET 2 OF 3

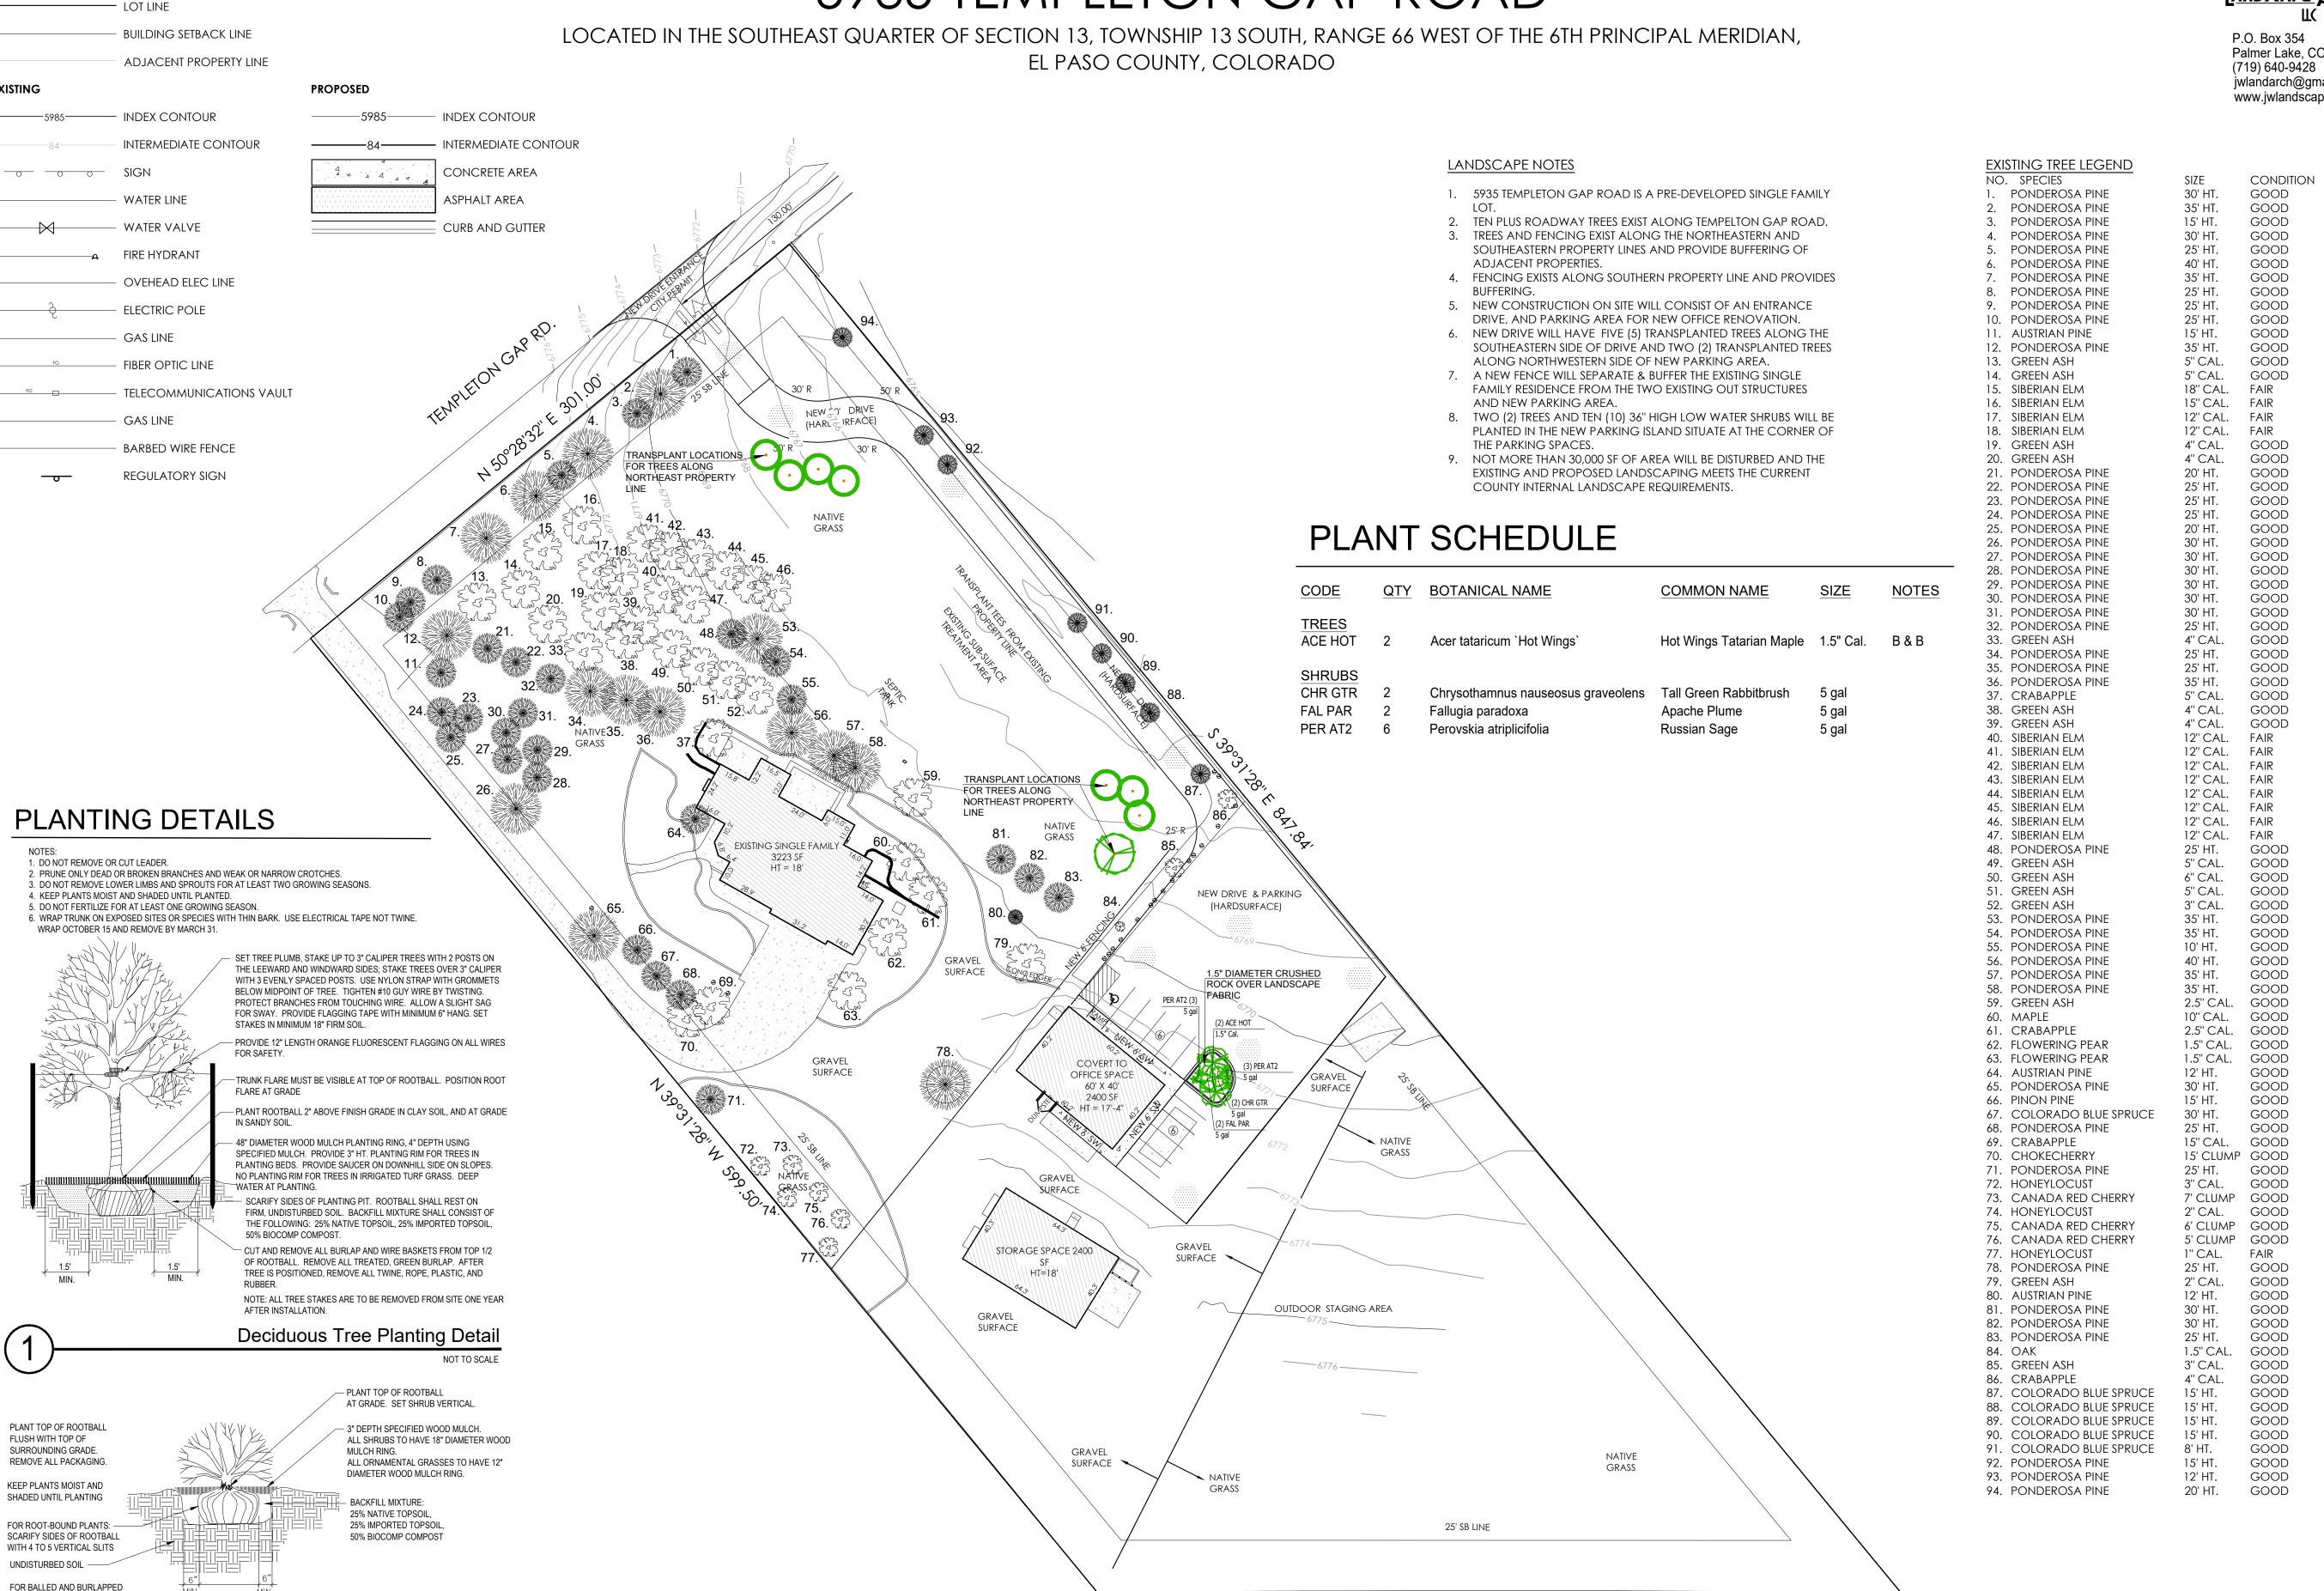

\$ 89°59'56" W 390.23'

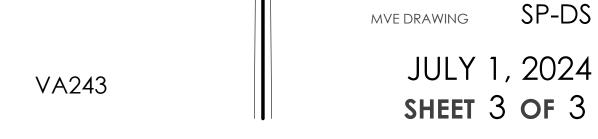



SITE PLAN DETAIL SHEET

5935 TEMPLETON GAP ROAD

DRAWN BY CHECKED BY AS-BUILTS BY CHECKED BY

DESIGNED BY

REVISIONS

4" THICK HOT MIX ASPHALT (HMA) IN ACCORDANCE WITH THE GEOTECHNICAL

PAVING GUIDELINES

D1557/AASHTO T-180)

ASPHALT PAVEMENT SECTION

HEAVY DUTY TRAFFIC DRIVE LANES

SCALE 1" = 1.0'

EVALUATION, SUPERPAVE MIXTURES IN CDOT SPECIFICATIONS & TOWN OF CASTLROCK

7 1/2" CDOT CLASS 5 OR 6 AGGREGATE BASE

COURSE PER CDOT TABLE 703-2 &
CONSTRUCTED IN ACCORDANCE WITH

SPECIFICATION FOR ROAD AND BRIDGE

CONSTRUCTION INCLUDING MOISTURE

TREATMENT AND COMPACTION (ASTM

SUBGRADE SCARIFIED 12" MIN BELOW

COMPACTED IN 8" MAX LIFTS, MOISTURE

CONDITIONED TO WITHIN 2% OPTIMUM

MOISTURE CONTENT & COMPACTED TO

MIN. 95% STD PROCTOR DRY DENSITY

(ASTM D698, AASHTO T99) & PROOF


BOTTOM OF BASE COURSE, FILL


SECTION 304 OF CDOT STANDARD










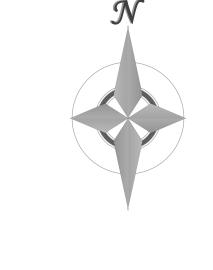

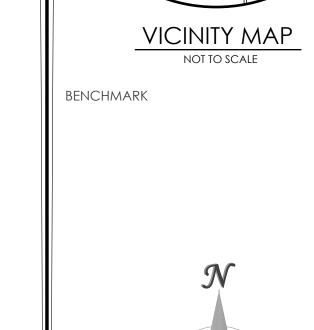

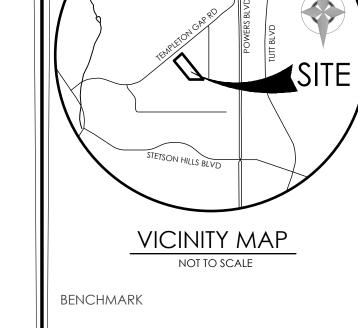

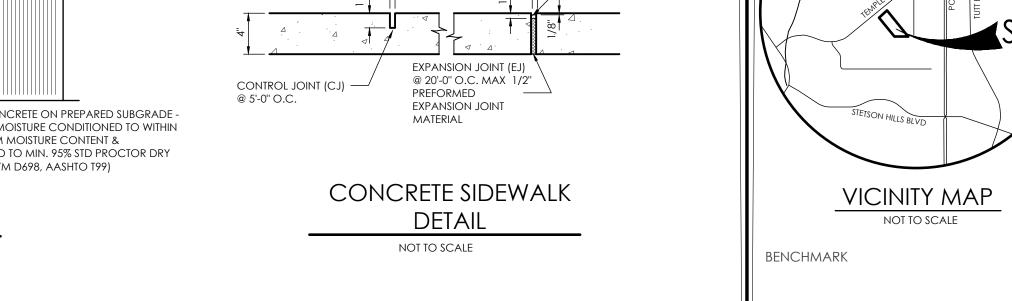

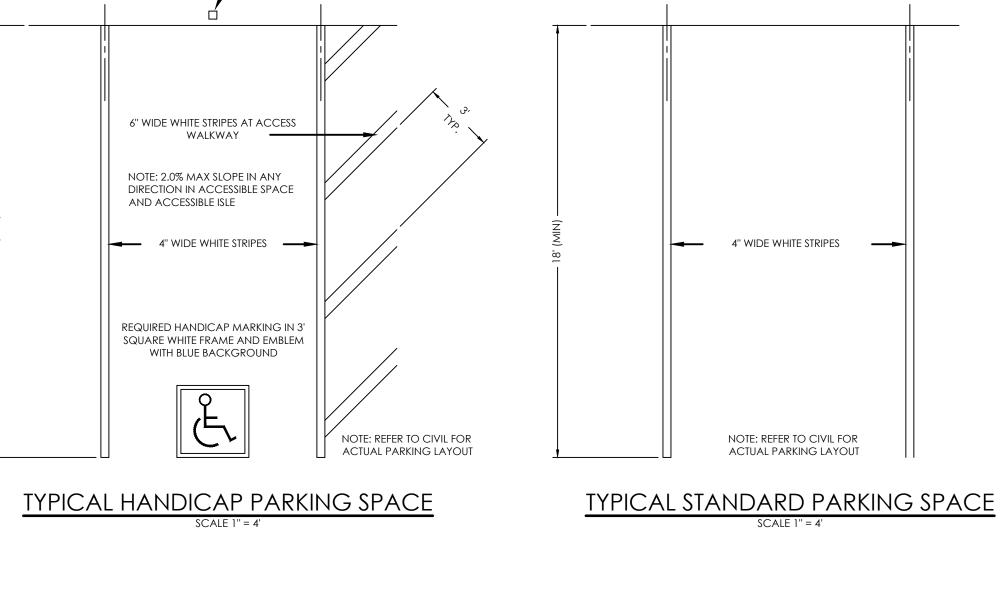

9'-8 5/8**'**

4'-0"

PROVIDE TWO 3/8" DROP RODS. DRILL RECEPTACLE HOLES IN CONCRETE SLAB AT OPEN AND CLOSED POSITIONS

DUMPSTER SCREEN GATE ELEV.


- SCALE: 3/8' = 1'-0'-


- STEEL POSTS WITH CONCRETE


DUMPSTER SCREEN PLAN


3'4 STEEL BOLLARDS RILLED WITH CONCRETE


3'-**Ø'** ∜

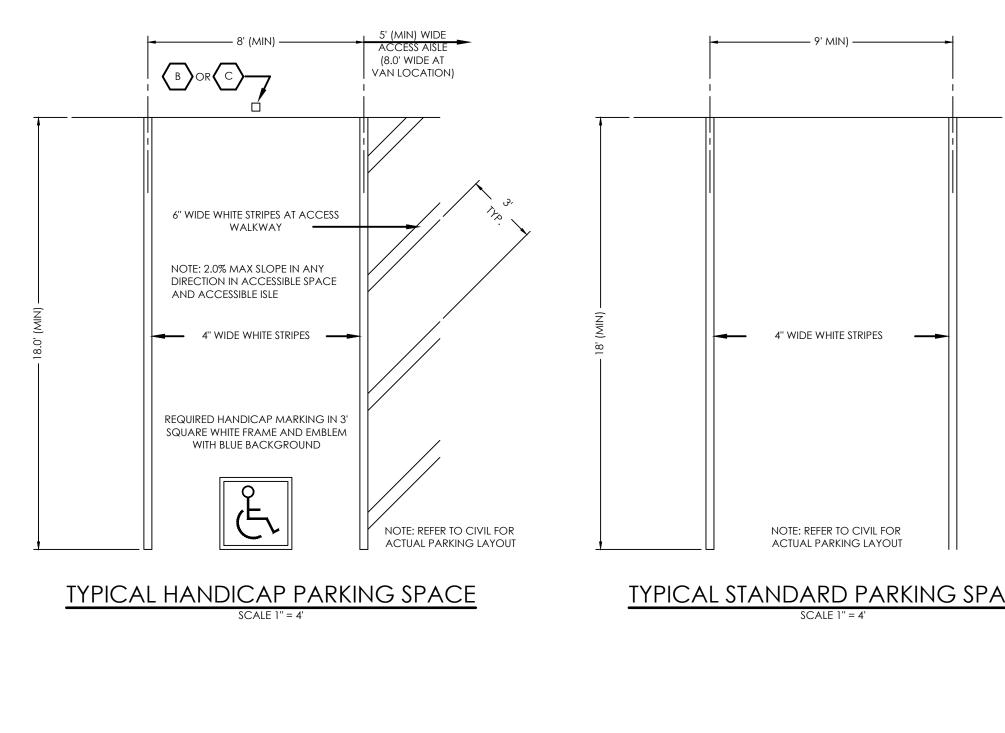


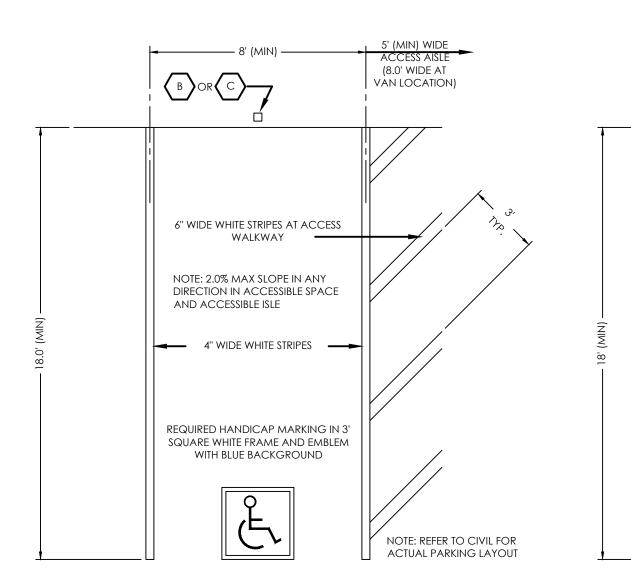


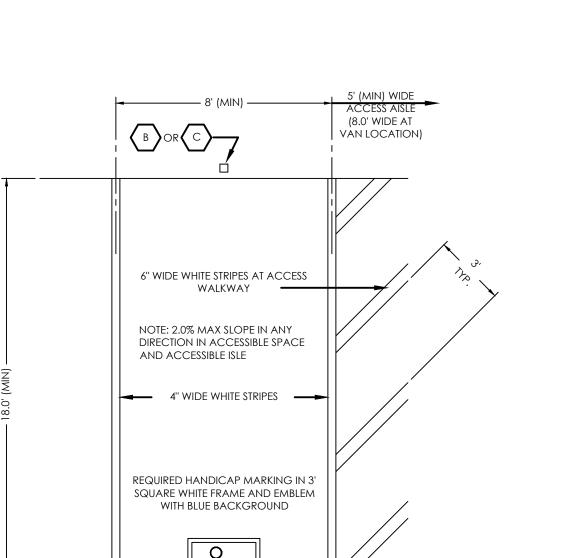


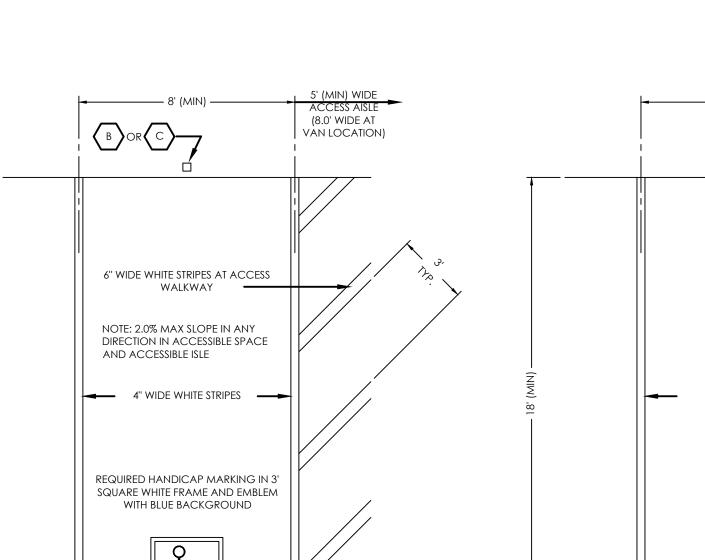


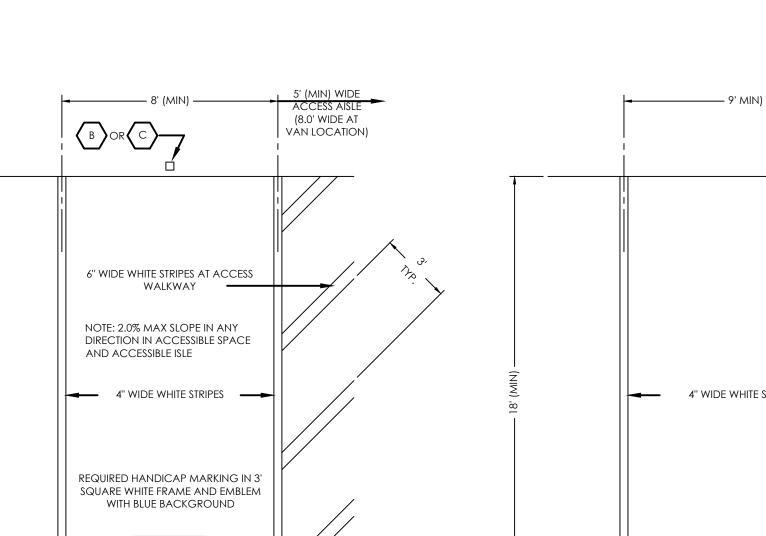


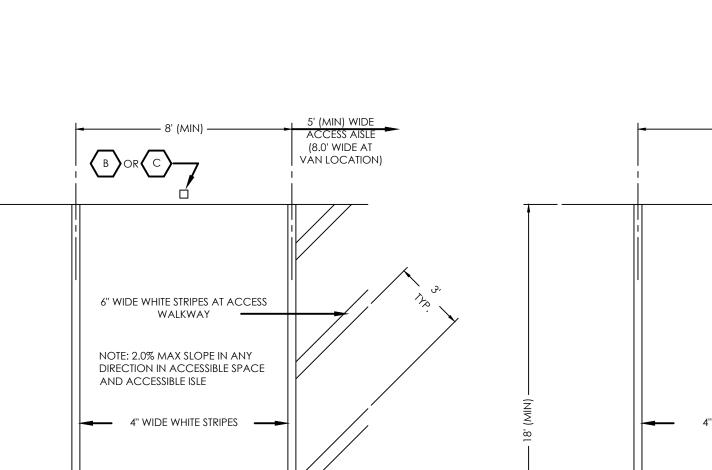


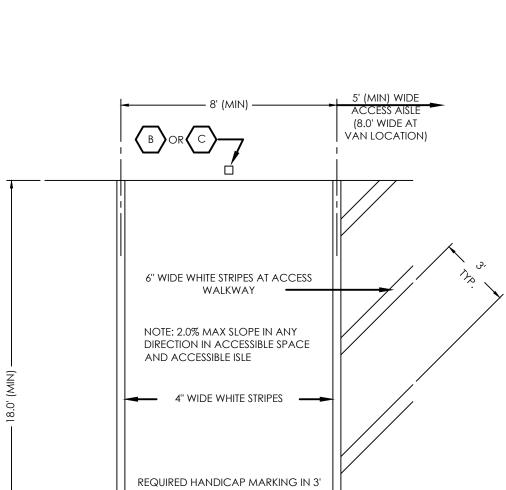


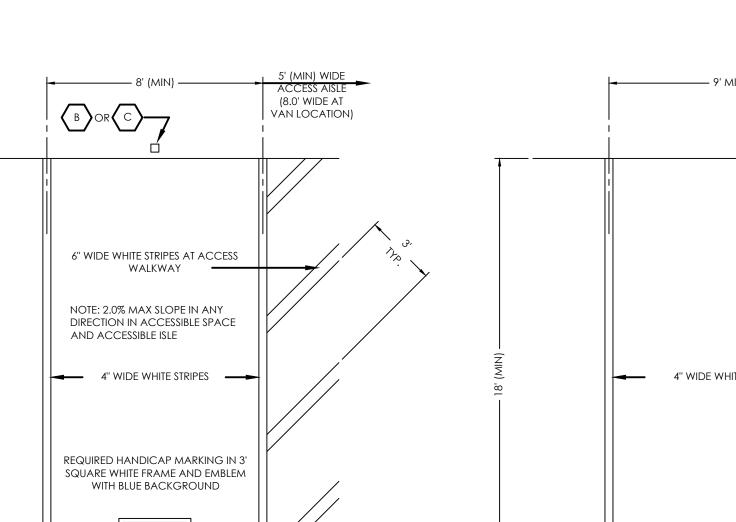


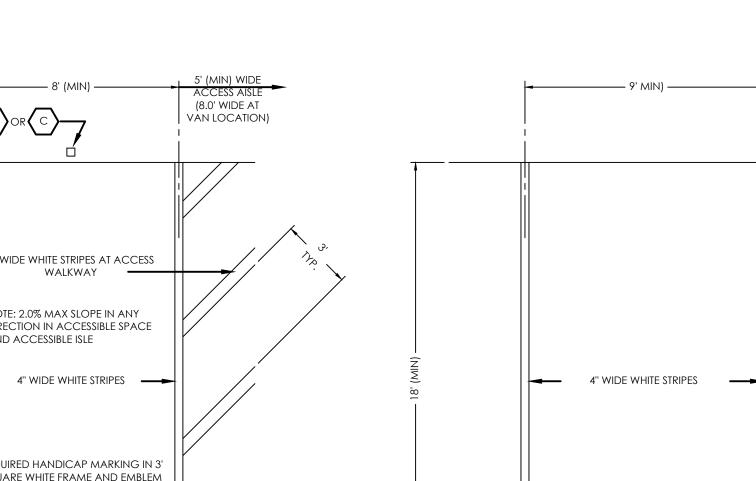


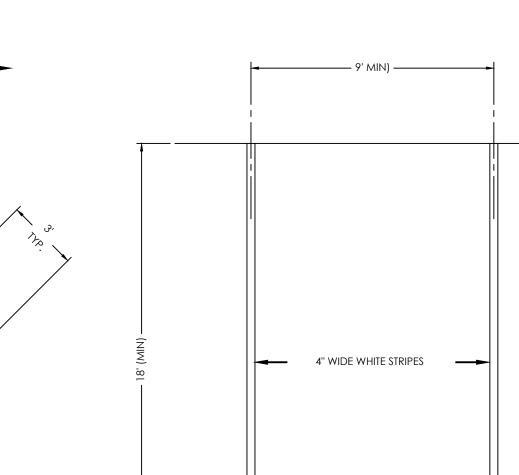

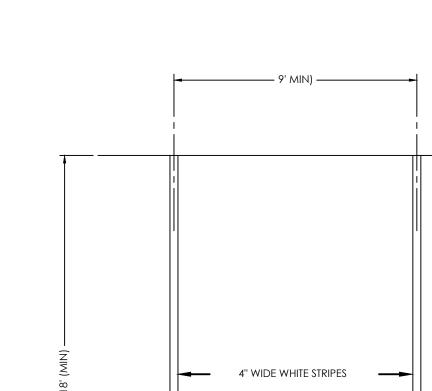

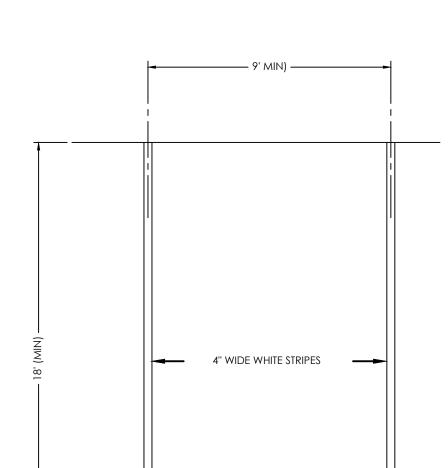

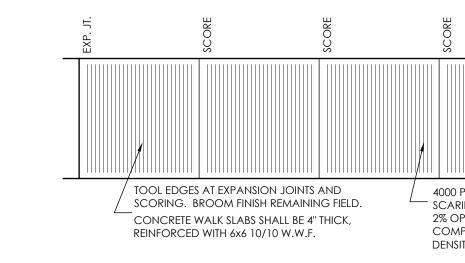

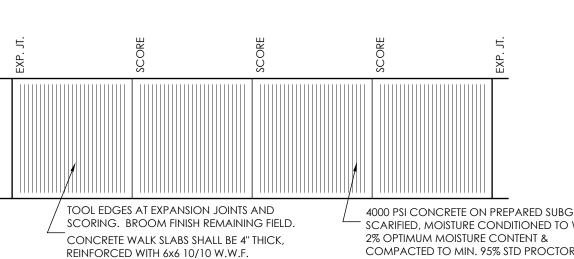

CONCRETE SIDEWALK 4" THK

SLOPE 1/4" PER FT

- PREPARE 6" THK SUBGRADE 95% MODIFIED PROCTOR DENSITY

18" CATCH CURB

& GUTTER

SCALE 1"=1"

W/FIBER MESH

SIDEWALK WIDTH AS SHOWN ON PLAN

THICKENED EDGE SIDEWALK

RADII

A 1/8" TO 1/4"

NOTE: CURB & GUTTER CONCRETE SHALL BE CITY OF COLORADO SPRINGS ENGINEERING

NOTE: CURB AND GUTTER SHOWN ON THESE

PLANS ARE PRIVATE. NO PUBLIC (EPC) CURB

AND GUTTER IS PROPOSED.

DIVISION STANDARD SPECIFICATIONS.

B 1-1/2"

SCALE: 1" = 1'

3 1/2" THICK HOT MIX ASPHALT (HMA) IN ACCORDANCE WITH THE GEOTECHNICAL EVALUATION, SUPERPAVE MIXTURES IN CDOT

SPECIFICATIONS & TOWN OF CASTLROCK

6 1/2" CDOT CLASS 5 OR 6 AGGREGATE BASE

COURSE PER CDOT TABLE 703-2 &

SECTION 304 OF CDOT STANDARD

CONSTRUCTED IN ACCORDANCE WITH

SPECIFICATION FOR ROAD AND BRIDGE

CONSTRUCTION INCLUDING MOISTURE

TREATMENT AND COMPACTION (ASTM

SUBGRADE SCARIFIED 12" MIN BELOW

BOTTOM OF BASE COURSE, FILL COMPACTED

IN 8" MAX LIFTS, MOISTURE CONDITIONED TO

WITHIN 2% OPTIMUM MOISTURE CONTENT &

COMPACTED TO MIN. 95% STD PROCTOR DRY

DENSITY (ASTM D698, AASHTO T99) & PROOF


PAVING GUIDELINES


D1557/AASHTO T-180)

ASPHALT PAVEMENT SECTION

LIGHT DUTY TRAFFIC PARKING STALLS

SCALE 1" = 1.0'

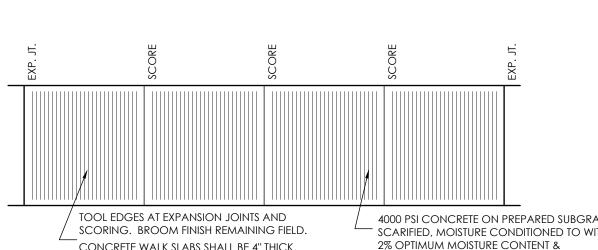

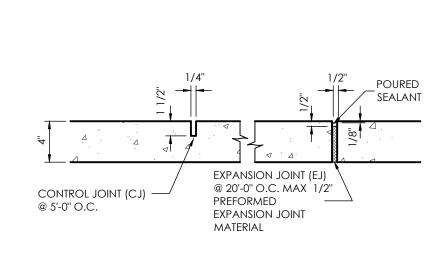

SEE PAVEMENT RECOMMENDATIONS

OF ASPHALT AND BASE COURSE IN TRAFFIC AND PARKING AREAS

SEE PAVEMENT RECOMMENDATIONS FROM SOILS ENGINEER FOR SUBGRADE

PREPARATION OR GEOTEXTILE SPEC.

18" SPILL CURB

& GUTTER


SCALE 1"=1"

FROM SOILS ENGINEER FOR THICKNESS

MEASUREMENTS ARE TO

FACE OF CURB

+0.00

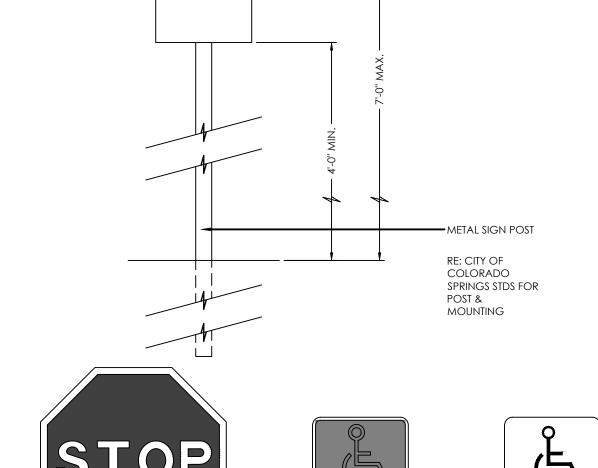


24"x24"

1. TYPOGRAPHY TO BE HELVETICA MEDIUM

2. NOTE: REFER TO SITE PLAN FOR LOCATIONS

TRAFFIC ENGINEERING STANDARDS.

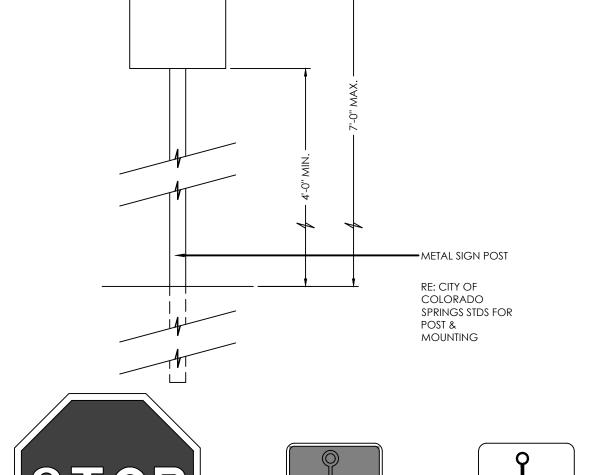

12"x18"

4. STOP SIGNS WILL BE INSTALLED BY THE DEVELOPER AT THE LOCATIONS SHOWN ON THE

SITE SIGNAGE

PROVIDE 3 BRACKETS PER POST - WOOD PANEL TO ROUND STEEL POST BRACKET)

2 X 4 CEDAR TOP CAP (STAIN)

1 x 6 CEDAR BOARDS -STAIN)

DUMPSTER SCREEN SECTION / ELEV.

NOTE: -FILL STEEL POSTS WITH CONCRETE -FASTEN EACH RAIL END USING THREE *8 x I-1/4" RAIL SCREWS -ATTACH RAILS TO CORNER POSTS USING ONE POSCLIP PER RAIL END -ATTACH CEDAR BOARDS TO RAILS WITH COATED SCREWS

2 × 4 CEDAR RAIL (CHAMFER TOP -STAIN)

5 1/2" CEDAR BOARD

2 X 4 CEDAR RAIL (STAIN)

-1 × 6 CEDAR BOARDS (STAIN)

___2%'+ STEEL POST

STEEL POST----

2 × 4—

1×6-

2 × 6

DEVELOPMENT PLAN TO MEET MUTCD STANDARDS AND THE CITY OF COLORADO SPRINGS

3. REMOVE EXISTING SIGNS AND REUSE WHERE APPLICABLE (NOT SHOWN).

VAN PARKING

12"x18"

