


SETTLERS RANCH Filing No. 2C Construction Drawings El Paso County, Colorado

PREPARED FOR:

Hodgen Settlers Ranch, LLC

P.O. Box 1488 Monument, CO 80132


PREPARED BY:

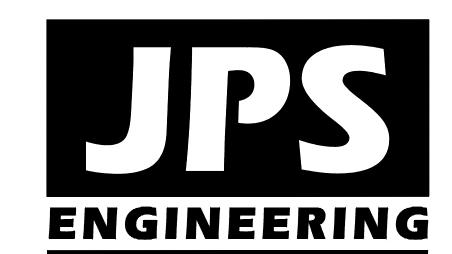

19 East Willamette Avenue Colorado Springs, Colorado 80903 MAY, 2019

GAS DEPARTMENT:

FIRE DEPARTMENT:

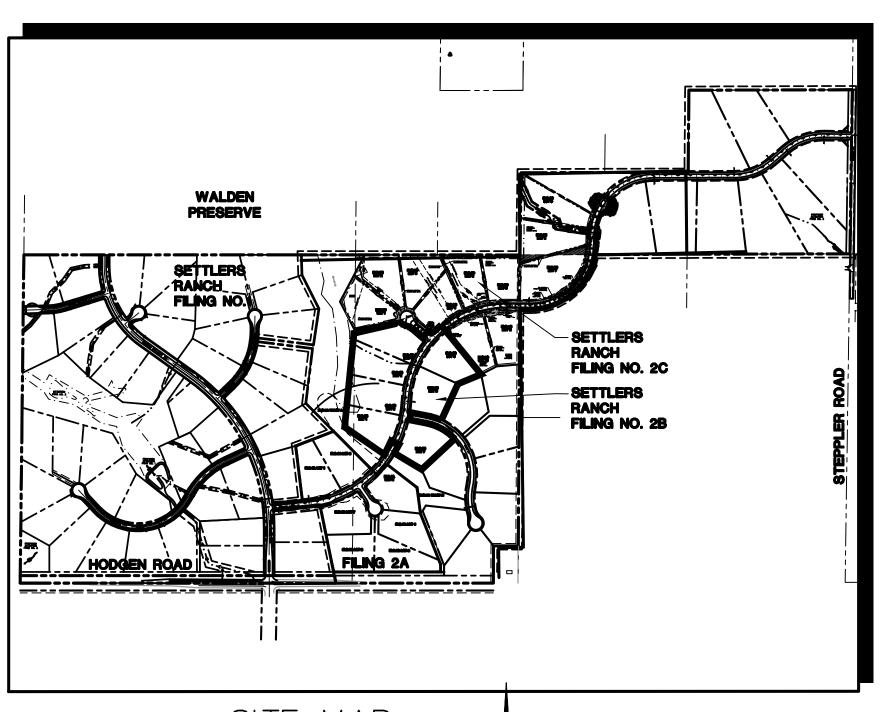

SITE MAP NOT TO SCALE

NOTE: NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS FROM REGULATIONS AND STANDARDS MUST BE REQUESTED AND APPROVED IN WRITING TO BE ACCEPTABLE.

BASIS OF BEARING: ALL BEARINGS USED ON THIS PLAT ARE BASED ON AN ASSUMED BEARING OF N90°00'00"E BETWEEN A 3" GALVANIZED STEEL CAP (ILLEGIBLE) AT THE SOUTHWEST CORNER OF SECTION 23, TOWNSHIP 11 SOUTH, RANGE 66 WEST OF THE 6TH P.M.; AND A 3" GALVANIZED STEEL CAP (ILLEGIBLE) AT THE SOUTHEAST CORNER OF SAID SECTION 23.

TEMPORARY BENCHMARK, PANEL POINT #109 FROM AERIAL TOPOGAPHY SURVEY PROVIDED BY MVE. ELEV.=7577.66 (SEE SHEET C1)

AGENCIES/CONTACTS

CIVIL ENGINEER:

STATE HIGHWAY

DEVELOPER: HODGEN SETTLERS RANCH, LLC P.O. BOX 1488 MONUMENT, CO 80132

MR. MARK DAVIS (719)481-9435 JPS ENGINEERING, INC.

19 E. WILLAMETTE AVENUE COLORADO SPRINGS, CO 80903 MR. JOHN P. SCHWAB, P.E. (719)477-9429

LOCAL ROADS & EL PASO COUNTY PCD DRAINAGE 2880 INTERNATIONAL CIRCLE COLORADO SPRINGS, CO 80910

> COLORADO DEPARTMENT OF TRANSPORTATION REGION 2 905 N. ERIE AVE. **PUEBLO, CO 81002**

MS. VALERIE SWORD (719)546-5707

MR. DAVE WALDNER (719)495-2283 TELEPHONE COMPANY: QWEST COMMUNICATIONS (LOCATORS) (800)922-1987

> A.T. & T. (LOCATORS) (719)635-3674

TRI-LAKES MONUMENT FIRE RESCUE AUTHORITY (719)266 - 3382

BLACK HILLS ENERGEY

11140 E. WOODMEN ROAD

COLORADO SPRINGS, CO 80908

MS. CHERYL PETERSON (719)393-6625

MOUNTAIN VIEW ELECTRIC ASSOCIATION

CALL UTILITY NOTIFICATION CENTER OF COLORADO



SHEET INDEX

TITLE SHEET/VICINITY MAP/LOCATION MAP

PHASING PLAN

OVERALL SITE PLAN & GENERAL NOTES

C1.01C MASTER GRADING PLAN/SHEET INDEX & SIGNING PLAN

EROSION CONTROL NOTÉS & DETAILS GRADING & EROSION CONTROL PLAN

TYPICAL SECTIONS & DETAILS

SETTLERS RANCH RD. PLAN & PROFILE SETTLERS RANCH RD. PLAN & PROFILE SETTLERS RANCH RD. PLAN & PROFILE NORTH CUL-DE-SAC PLAN & PROFILE

ENGINEER:

DESIGN ENGINEER'S STATEMENT:

THESE DETAILED PLANS AND SPECIFICATIONS WERE PREPARED UNDER MY DIRECTION AND SUPERVISION. SAID PLANS AND SPECIFICATIONS OR OMISSIONS ON MY PART IN PREPARATION OF THESE DETAILED PLANS AND SPECIFICATIONS.

JOHN P. SCHWAB, P.E. #29891

DATE

OWNER/DEVELOPER'S STATEMENT:

, THE OWNER/DEVELOPER HAVE READ AND WILL COMPLY WITH ALL OF THE REQUIREMENTS SPECIFIED IN THESE DETAILED PLANS AND SPECIFICATIONS.

HODGEN SETTLERS RANCH, LLC P.O. BOX 1488

DATE

MONUMENT, COLORADO 80132

EL PASO COUNTY:

COUNTY PLAN REVIEW IS PROVIDED ONLY FOR GENERAL CONFORMANCE WITH COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE FOR THE ACCURACY AND ADEQUACY OF THE DESIGN, DIMENSIONS, AND/OR ELEVATIONS WHICH SHALL BE CONFIRMED AT THE JOB SITE. THE COUNTY THROUGH THE APPROVAL OF THIS DOCUMENT ASSUMES NO RESPONSIBILITY FOR COMPLETENESS AND/OR ACCURACY OF THIS DOCUMENT.

FILED IN ACCORDANCE WITH THE REQUIREMENTS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE, DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2. AND ENGINEERING CRITERIA MANUAL AS AMENDED.


IN ACCORDANCE WITH ECM SECTION 1.12, THESE CONSTRUCTION DOCUMENTS WILL BE VALID FOR CONSTRUCTION FOR A PERIOD OF 2 YEARS FROM THE DATE SIGNED BY THE EL PASO COUNTY ENGINEER. IF CONSTRUCTION HAS NOT STARTED WITHIN THOSE 2 YEARS, THEY WILL NEED TO BE RESUBMITTED FOR APPROVAL, INCLUDING PAYMENT OF REVIEW FEES AT THE PLANNING AND COMMUNITY DEVELOPMENT DIRECTOR'S DISCRETION.


JENNIFER IRVINE, P.E., COUNTY ENGINEER / ECM ADMINISTRATOR


DATE

SHEET G1C JPS PN# 030501

PCD FILE NO. SF-18-018

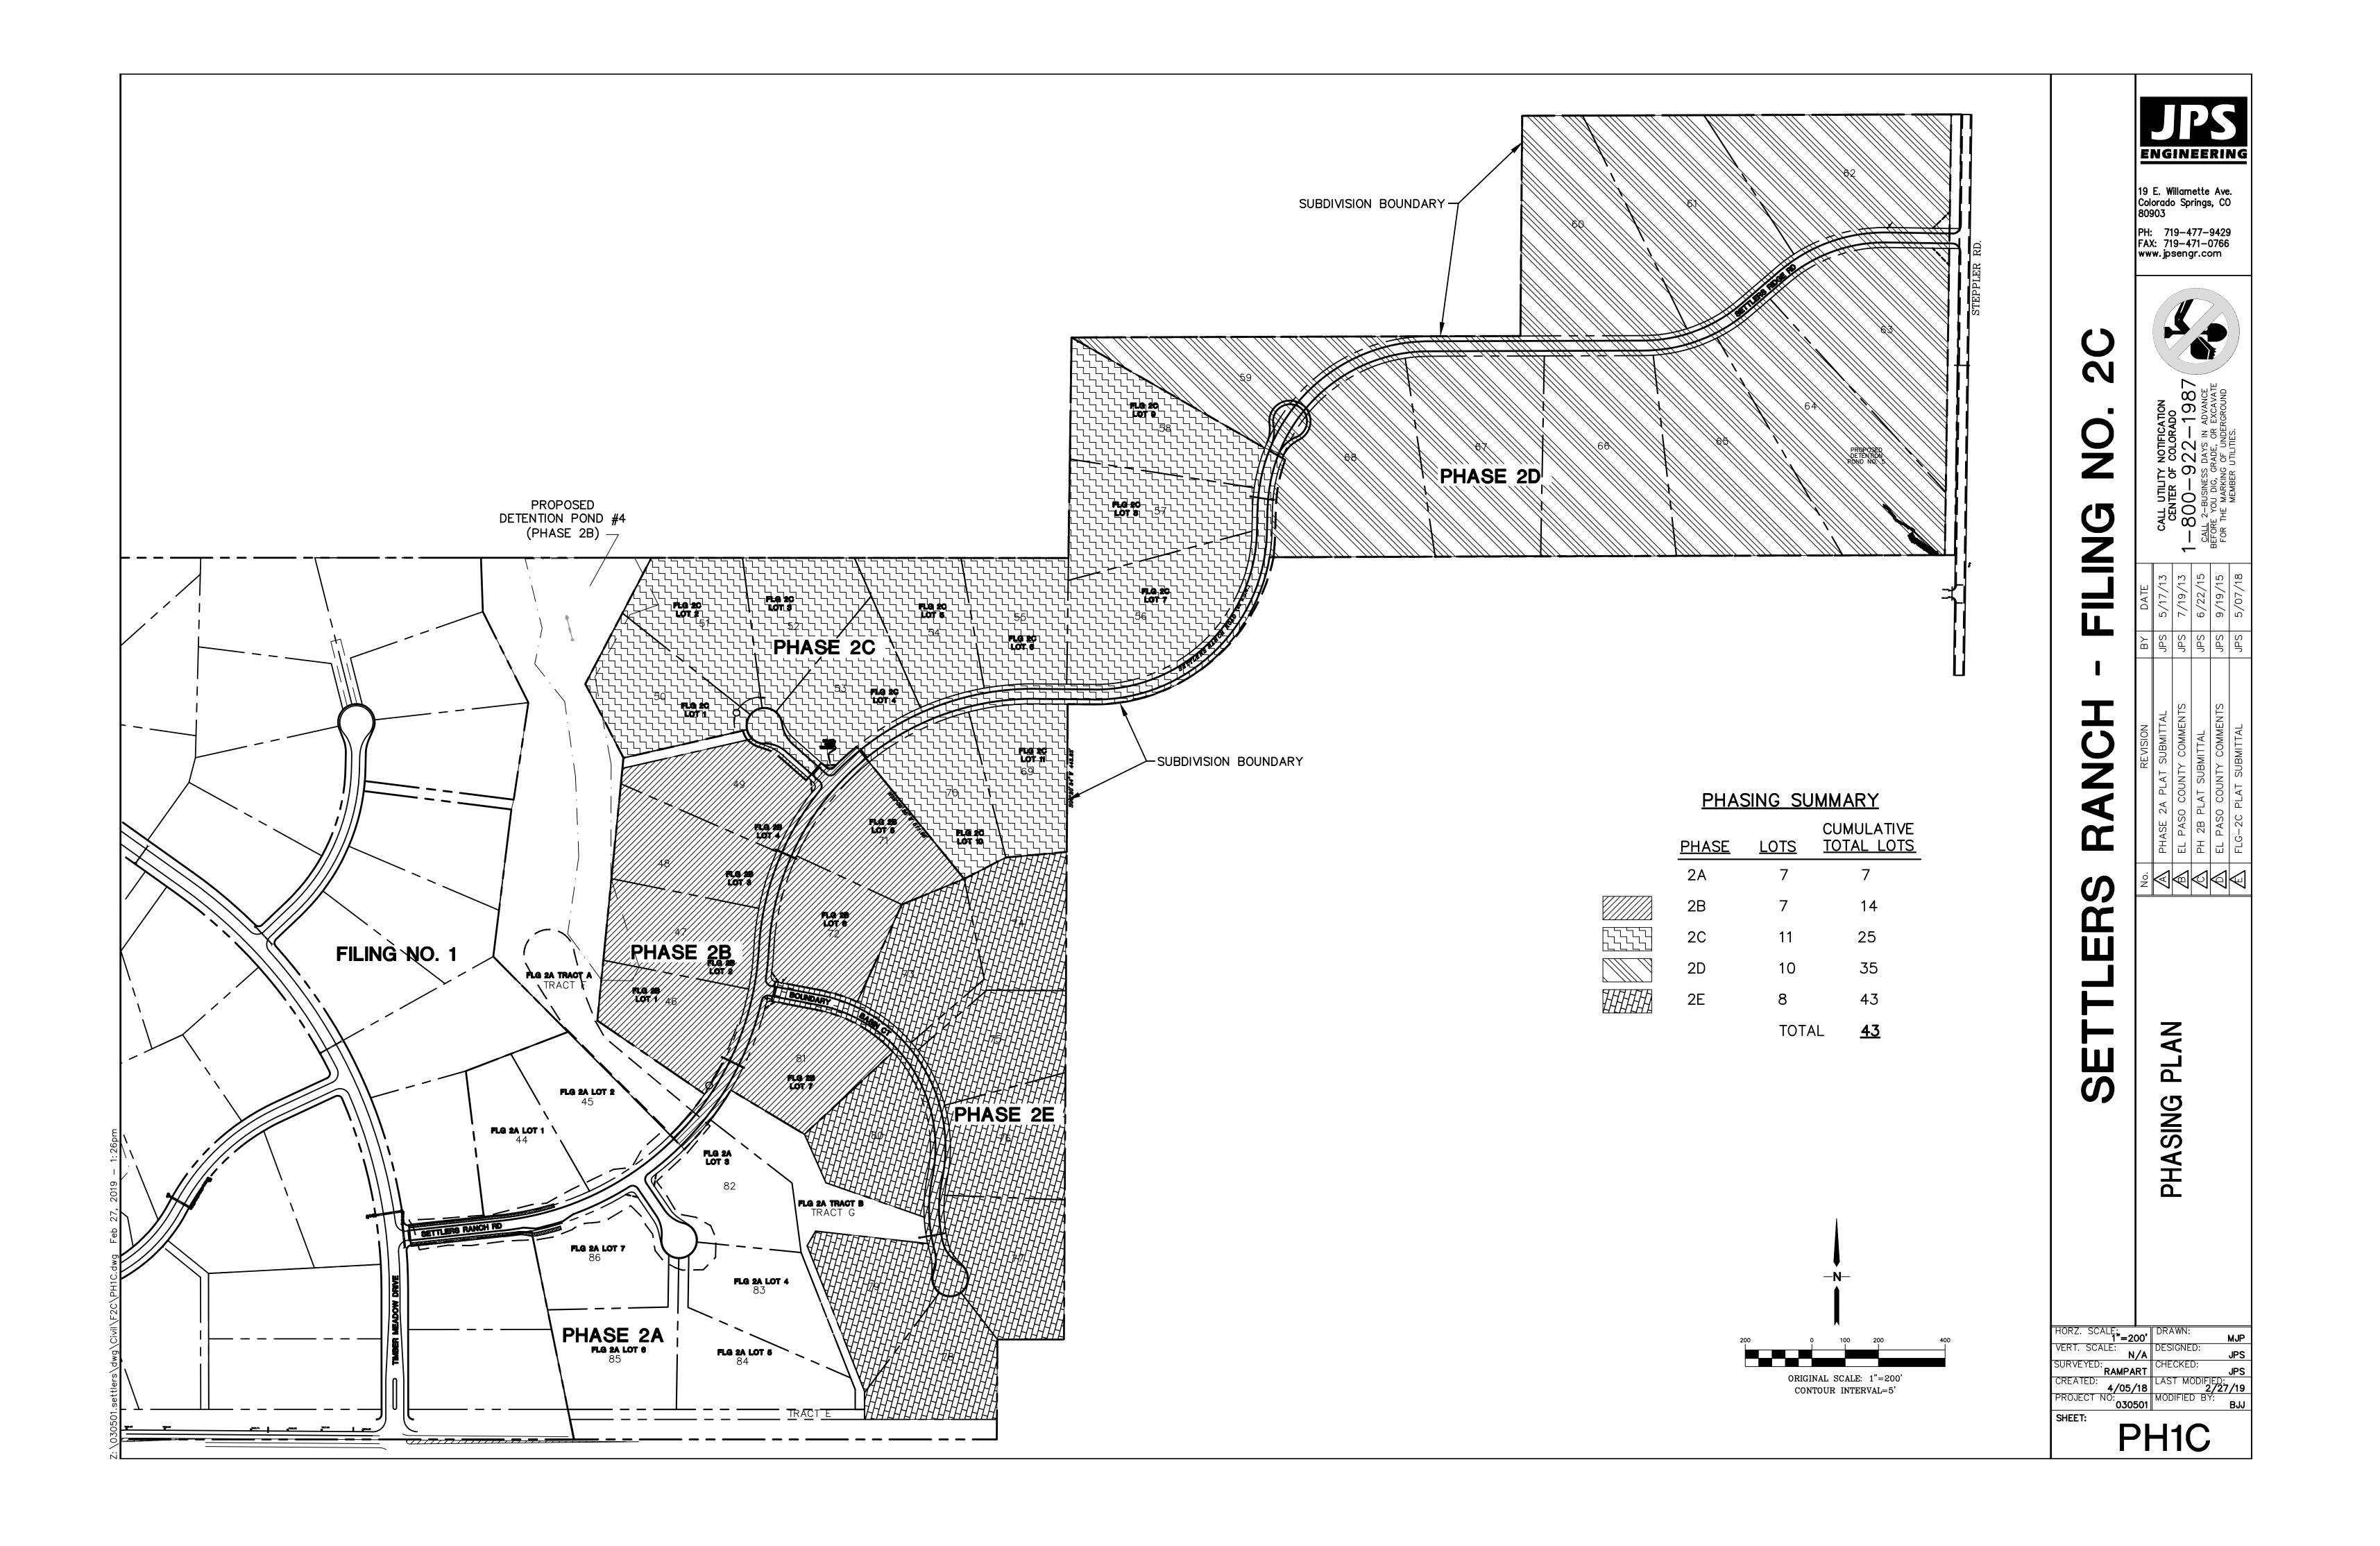

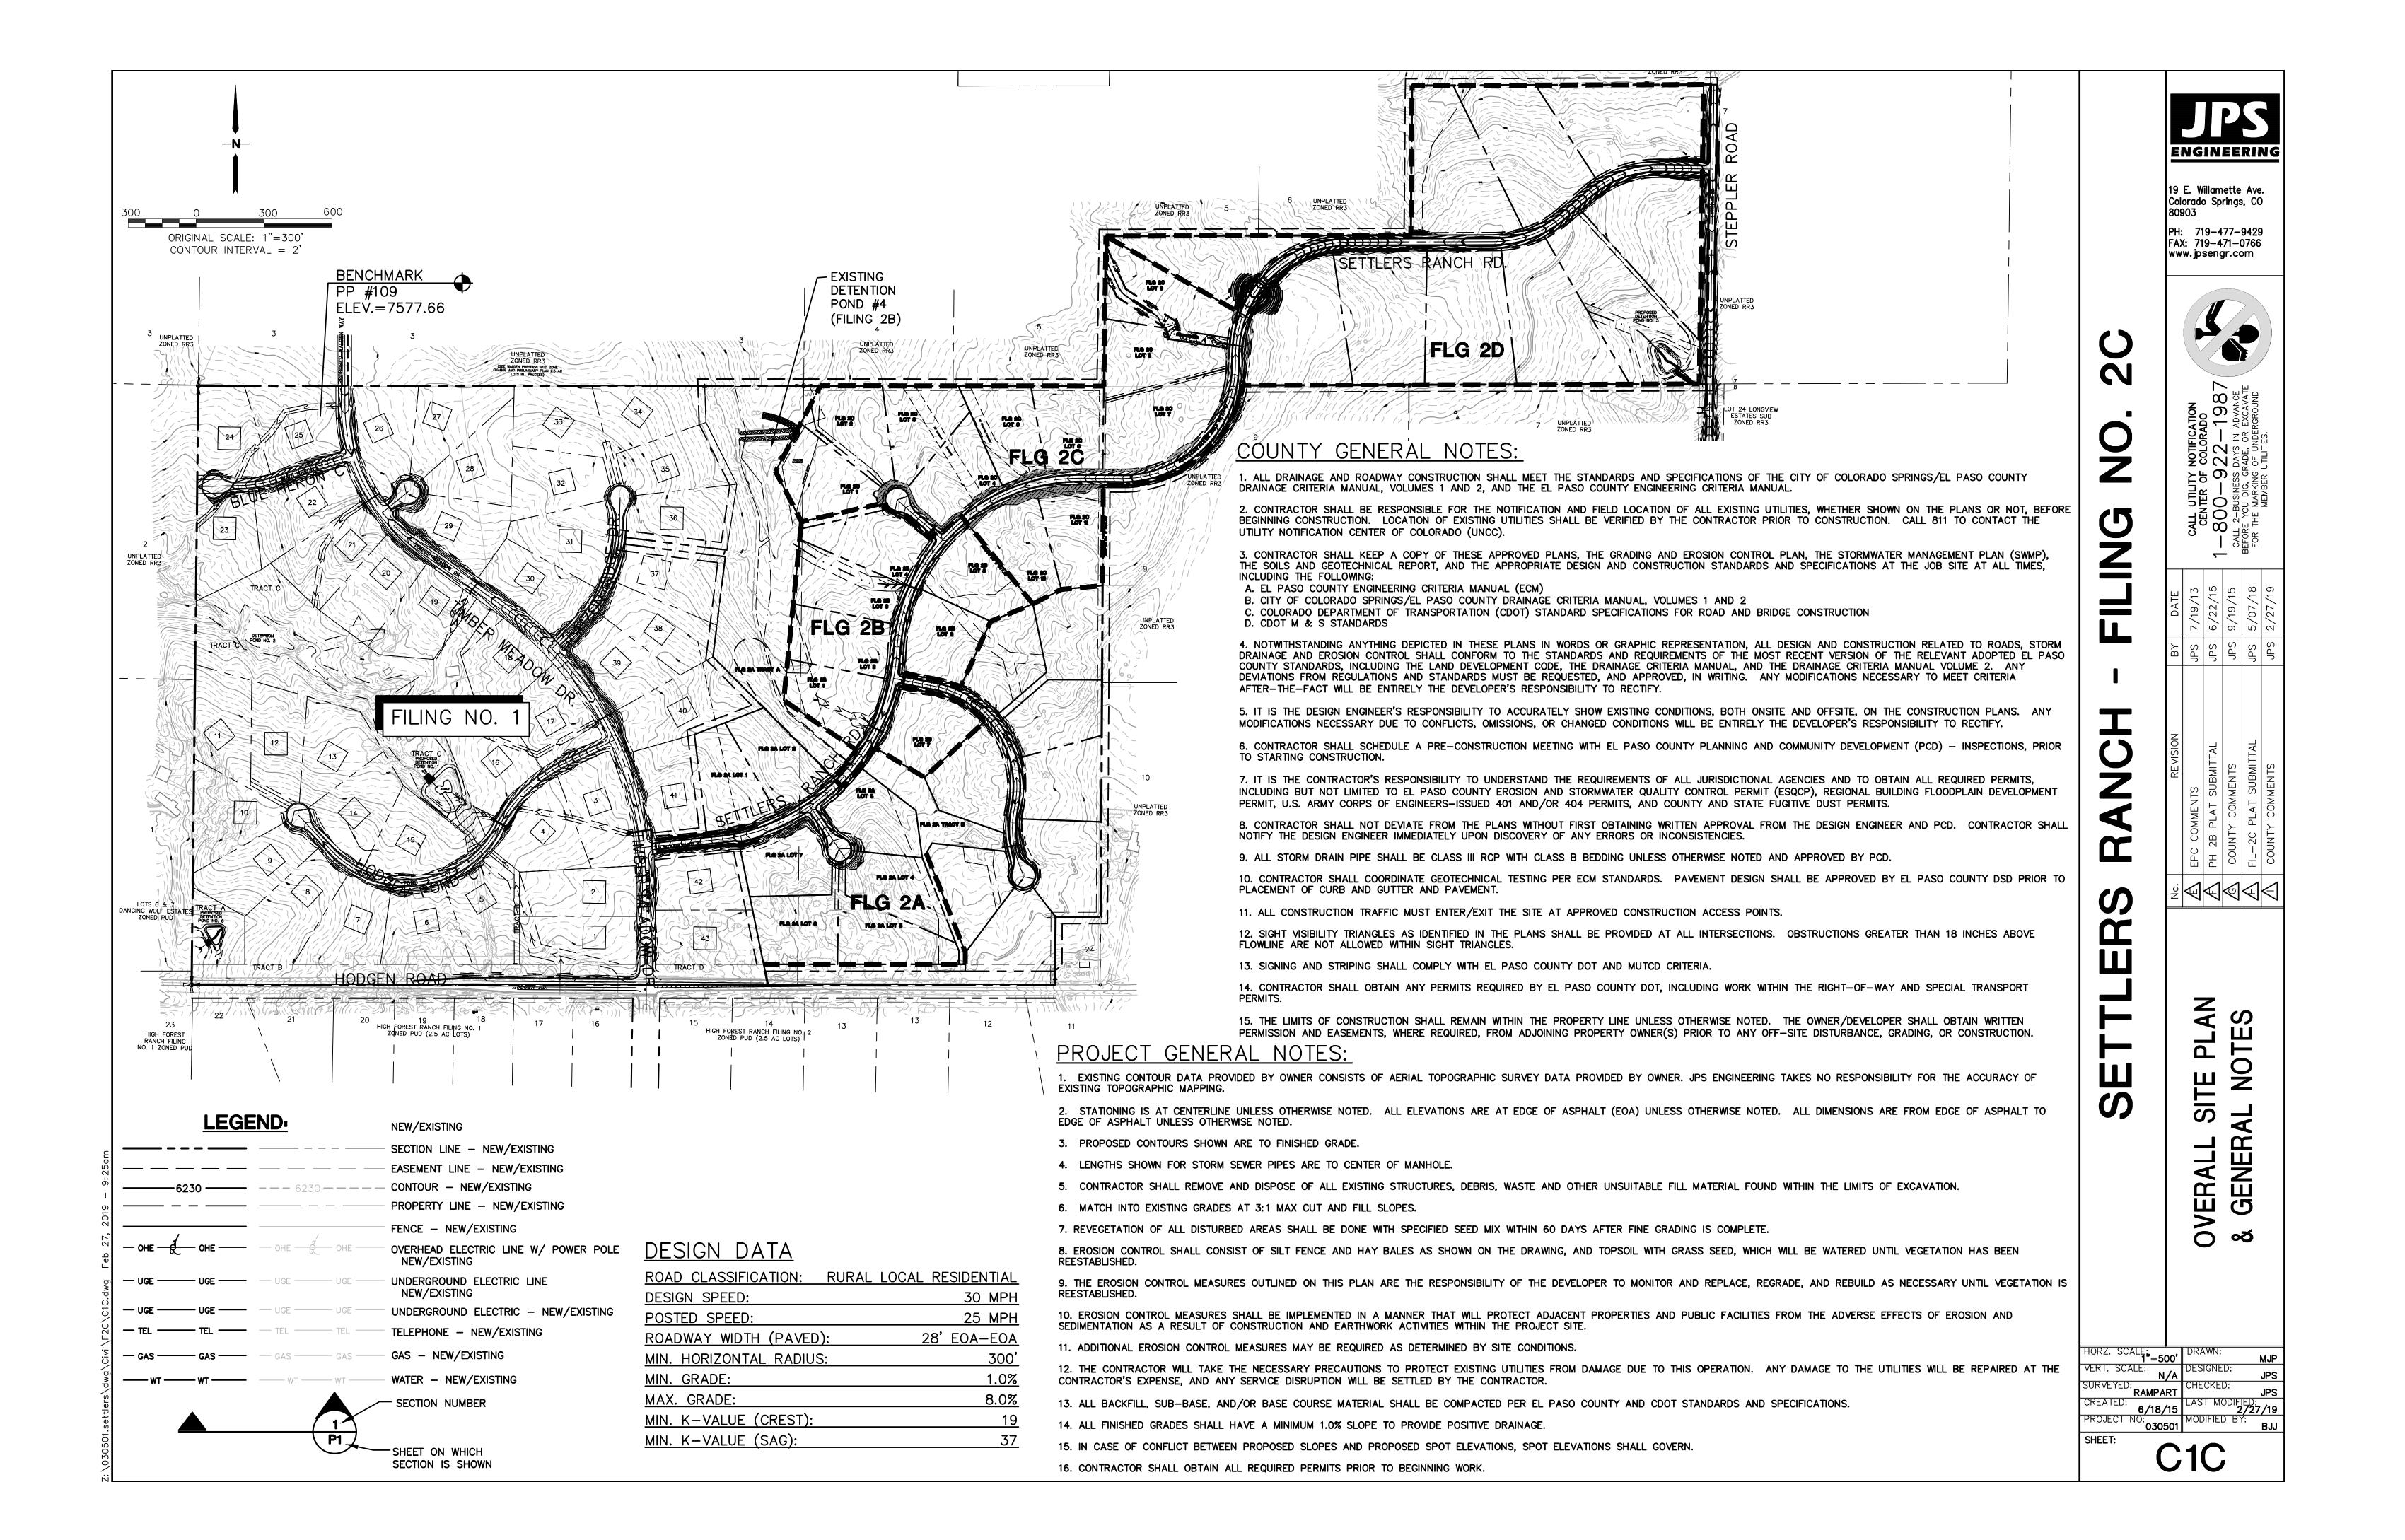


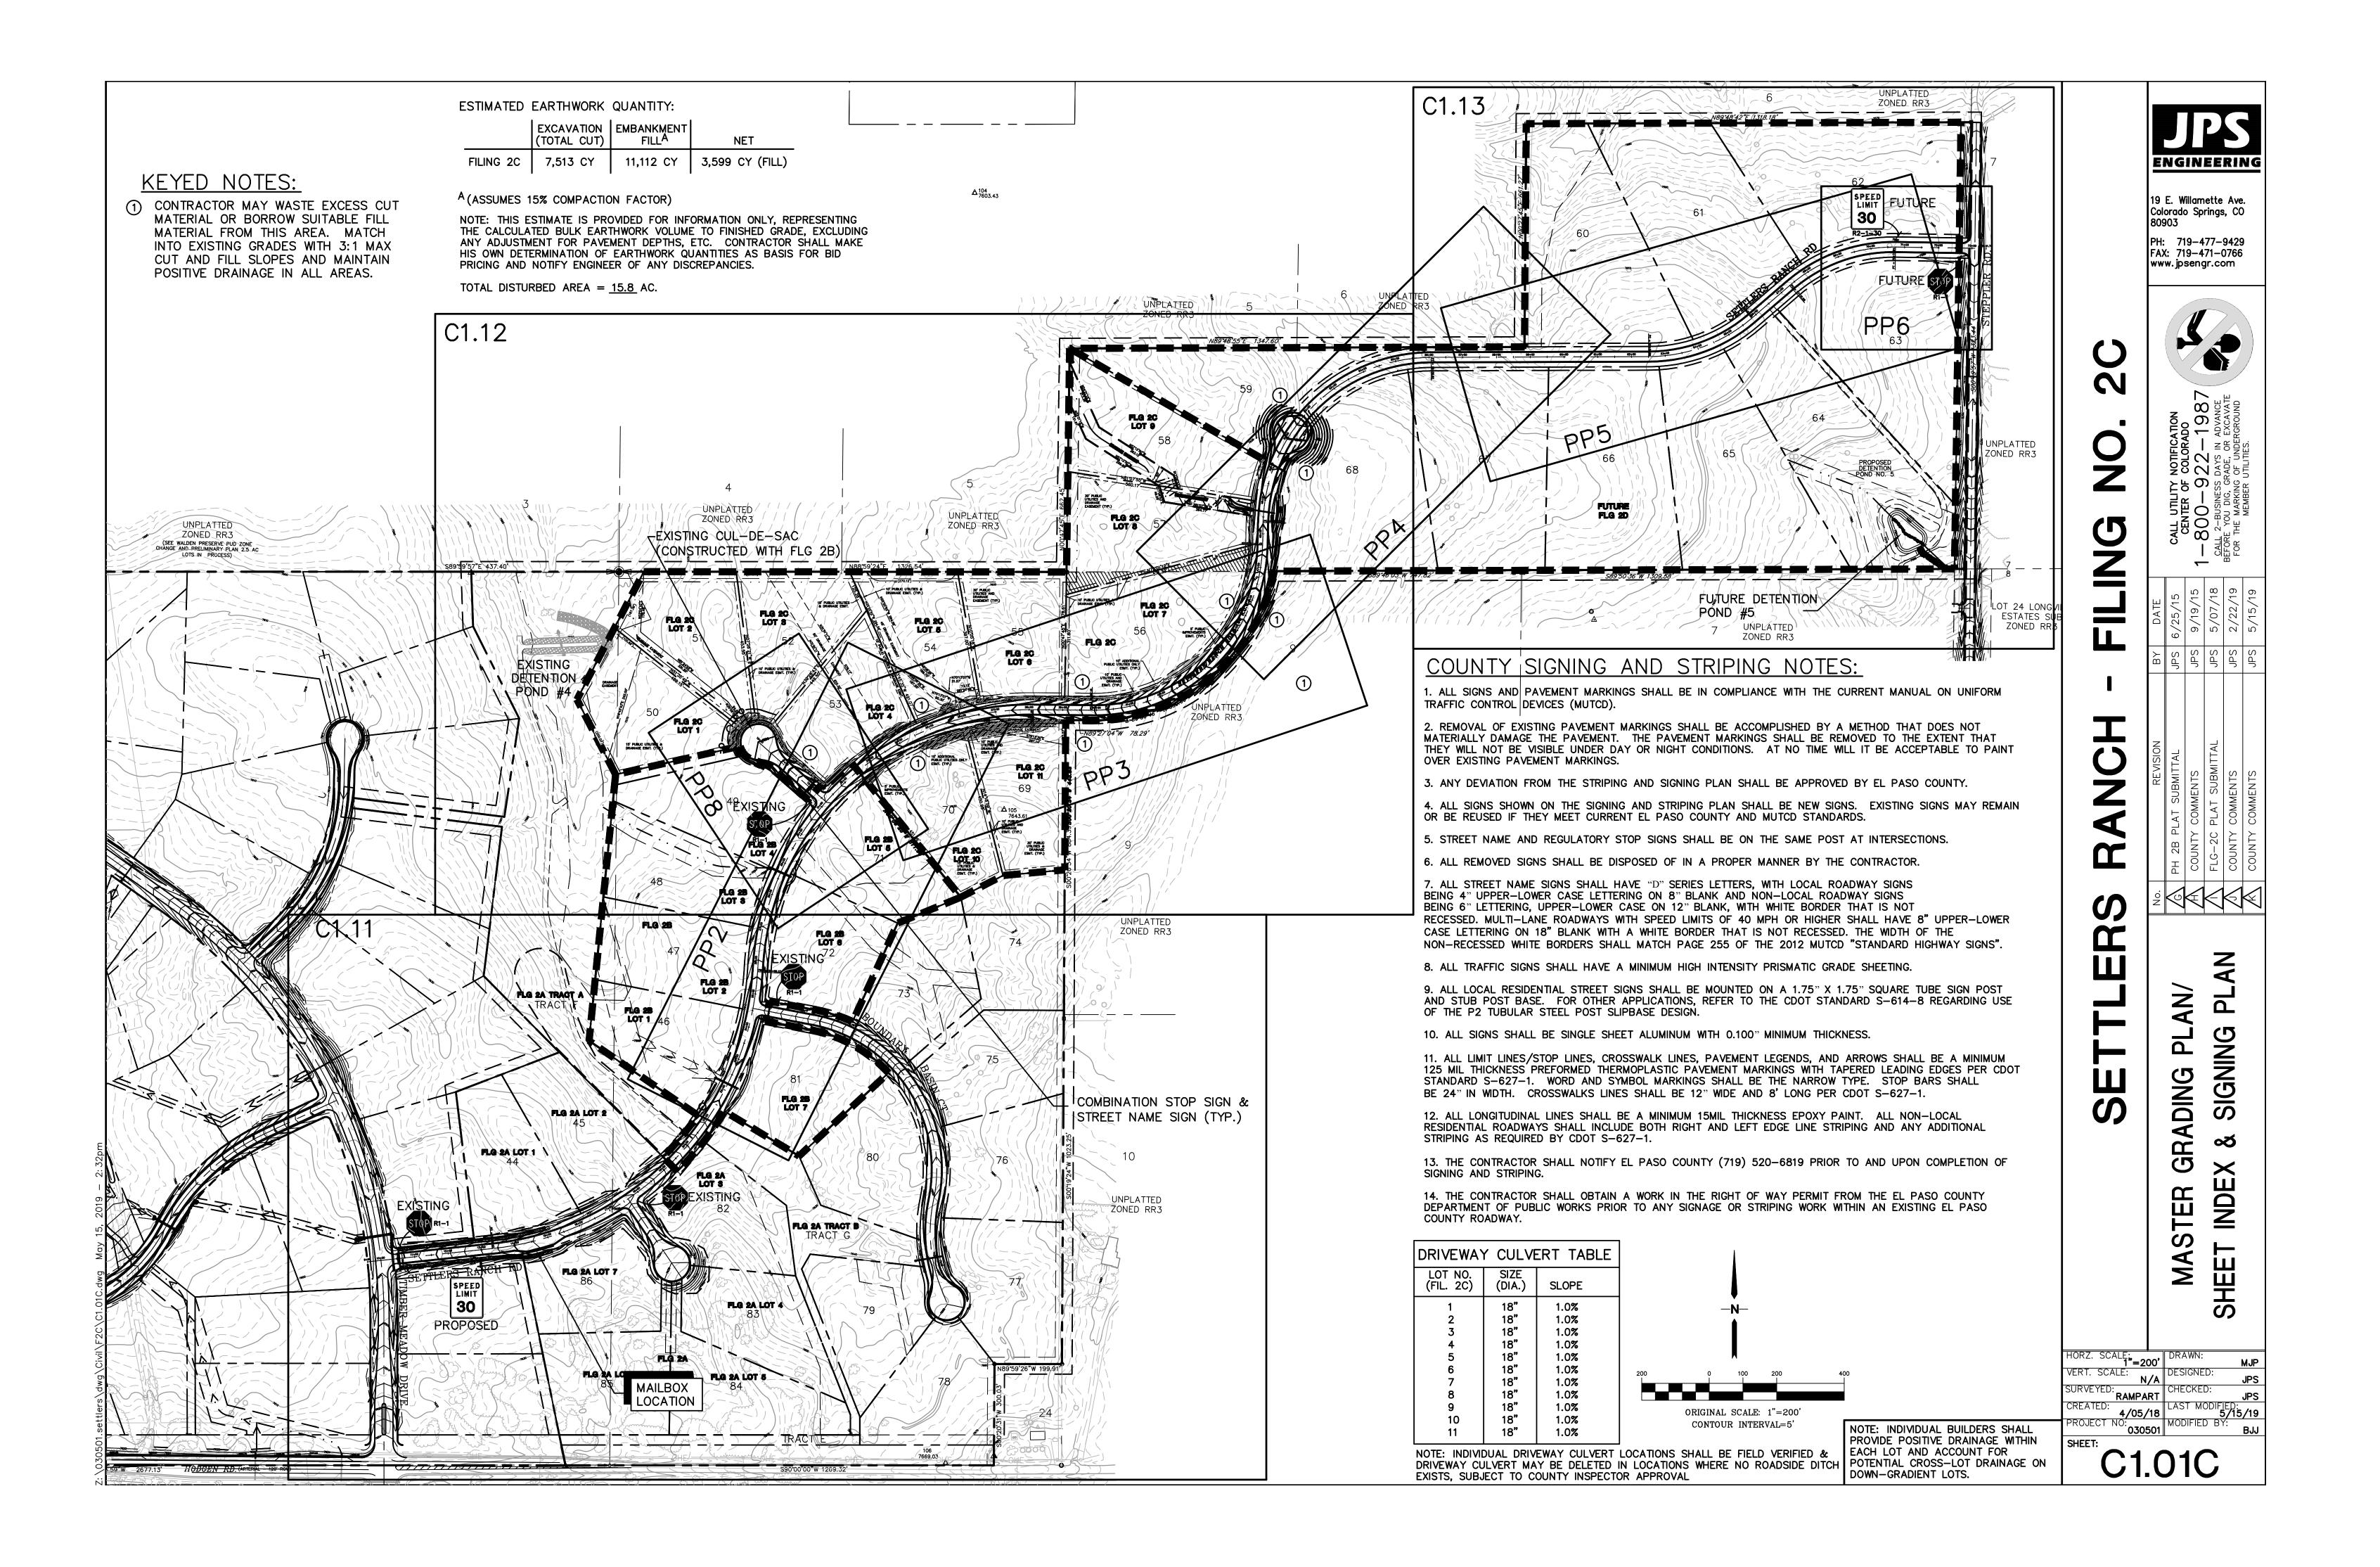


Revised 7/07/10

- 1. Construction may not commence until a Construction Permit is obtained from Development Services and a Preconstruction Conference is held with Planning and Community Development Inspectors.
- 2. Stormwater discharges from construction sites shall not cause or threaten to cause pollution, contamination, or degradation of State Waters. All work and earth disturbance shall be done in a manner that minimizes pollution of any on-site or off site waters, including wetlands.
- 3. Notwithstanding anything depicted in these plans in words or graphic representation, all design and construction related to roads, storm drainage and erosion control shall conform to the standards and requirements of the most recent version of the relevant adopted El Paso County standards, including the Land Development Code, the Engineering Criteria Manual, the Drainage Criteria Manual, and the Drainage Criteria Manual Volume 2. Any deviations to regulations and standards must be requested, and approved, in writing.
- 4. A separate Stormwater Management Plan (SMWP) for this project shall be completed and an Erosion and Stormwater Quality Control Permit (ESQCP) issued prior to commencing construction. During construction the SWMP is the responsibility of the designated Stormwater Manager, shall be located on site at all times and shall be kept up to date with work progress and changes in the field.
- 5. Once the ESQCP has been issued, the contractor may install the initial stage erosion and sediment control BMPs as indicated on the GEC. A preconstruction meeting between the contractor, engineer, and El Paso County will be held prior to any construction. It is the responsibility of the applicant to coordinate the meeting time and place with County PCD inspections staff.
- 6. Soil erosion control measures for all slopes, channels, ditches, or any disturbed land area shall be completed within 21 calendar days after final grading, or final earth disturbance, has been completed. Disturbed areas and stockpiles which are not at final grade but will remain dormant for longer than 30 days shall also be mulched within 21 days after interim grading. An area that is going to remain in an interim state for more than 60 days shall also be seeded. All temporary soil erosion control measures and BMPs shall be maintained until permanent soil erosion control measures are implemented and established.
- 7. Temporary soil erosion control facilities shall be removed and earth disturbance areas graded and stabilized with permanent soil erosion control measures pursuant to standards and specification prescribed in the DCM Volume II and the Engineering Criteria Manual (ECM) appendix I.
- 8. All persons engaged in earth disturbance shall implement and maintain acceptable soil erosion and sediment control measures including BMPs in conformance with the erosion control technical standards of the Drainage Criteria Manual (DCM) Volume II and in accordance with the Stormwater Management Plan (SWMP).
- 9. All temporary erosion control facilities including BMPs and all permanent facilities intended to control erosion of any earth disturbance operations, shall be installed as defined in the approved plans, the SWMP and the DCM Volume II and maintained throughout the duration of the earth disturbance operation.
- 10. Any earth disturbance shall be conducted in such a manner so as to effectively reduce accelerated soil erosion and resulting sedimentation. All disturbances shall be designed, constructed, and completed so that the exposed area of any disturbed land shall be limited to the shortest practical period of time.
- 11. Any temporary or permanent facility designed and constructed for the conveyance of stormwater around, through, or from the earth disturbance area shall be designed to limit the discharge to a non-erosive velocity.
- 12. Concrete wash water shall be contained and disposed of in accordance with the SWMP. No wash water shall be discharged to or allowed to runoff to State Waters, including any surface or subsurface storm drainage system or facilities.
- 13. Erosion control blanketing is to be used on slopes steeper than 3:1.
- 14. Building, construction, excavation, or other waste materials shall not be temporarily placed or stored in the street, alley, or other public way, unless in accordance with an approved Traffic Control Plan. BMP's may be required by El Paso County Engineering if deemed necessary, based on specific conditions and circumstances.
- 15. Vehicle tracking of soils and construction debris off-site shall be minimized. Materials tracked offsite shall be cleaned up and properly disposed of immediately.
- 16. Contractor shall be responsible for the removal of all wastes from the construction site for disposal in accordance with local and State regulatory requirements. No construction debris, tree slash, building material wastes or unused building materials shall be buried, dumped, or discharged at the
- 17. The owner, site developer, contractor, and/or their authorized agents shall be responsible for the removal of all construction debris, dirt, trash, rock, sediment, and sand that may accumulate in the storm sewer or other drainage conveyance system and stormwater appurtenances as a result of site
- 18. The quantity of materials stored on the project site shall be limited, as much as practical, to that quantity required to perform the work in an orderly sequence. All materials stored on-site shall be stored in a neat, orderly manner, in their original containers, with original manufacturer's labels.
- 19. No chemicals are to be used by the contractor, which have the potential to be released in stormwater unless permission for the use of a specific chemical is granted in writing by the ECM Administrator. In granting the use of such chemicals, special conditions and monitoring may be required.
- 20. Bulk storage structures for petroleum products and other chemicals shall have adequate protection so as to contain all spills and prevent any spilled material from entering State Waters, including any surface or subsurface storm drainage system or facilities.
- 21. No person shall cause the impediment of stormwater flow in the flow line of the curb and gutter or in the ditchline.
- 22. Individuals shall comply with the "Colorado Water Quality Control Act" (Title 25, Article 8, CRS), and the "Clean Water Act" (33 USC 1344), in addition to the requirements included in the DCM Volume II and the ECM Appendix I. All appropriate permits must be obtained by the contractor prior to construction (NPDES, Floodplain, 404, fugitive dust, etc.). In the event of conflicts between these requirements and laws, rules, or regulations of other Federal, State, or County agencies, the more restrictive laws, rules, or regulations shall apply.
- 23. All construction traffic must enter/exit the site at approved construction access points.
- 24. Prior to actual construction the permitee shall verify the location of existing utilities.
- 25. A water source shall be available on site during earthwork operations and utilized as required to minimize dust from earthwork equipment and wind.
- 26. The soils report for this site prepared by Himmelreich & Assoc., dated 1/24/05 shall be considered a part of these plans.
- 27. At least ten days prior to the anticipated start of construction, for projects that will disturb 1 acre or more, the owner or operator of construction activity shall submit a permit application for stormwater discharge to the Colorado Department of Public Health and Environment, Water Quality Division. The application contains certification of completion of a stormwater management plan (SWMP), of which this grading and erosion control plan may be a part. For information or application materials contact:

Colorado Department of Public Health and Environment Water Quality Control Division WQCD - Permits 4300 Cherry Creek Drive South Denver, CO 80246-1530 Attn: Permits Unit

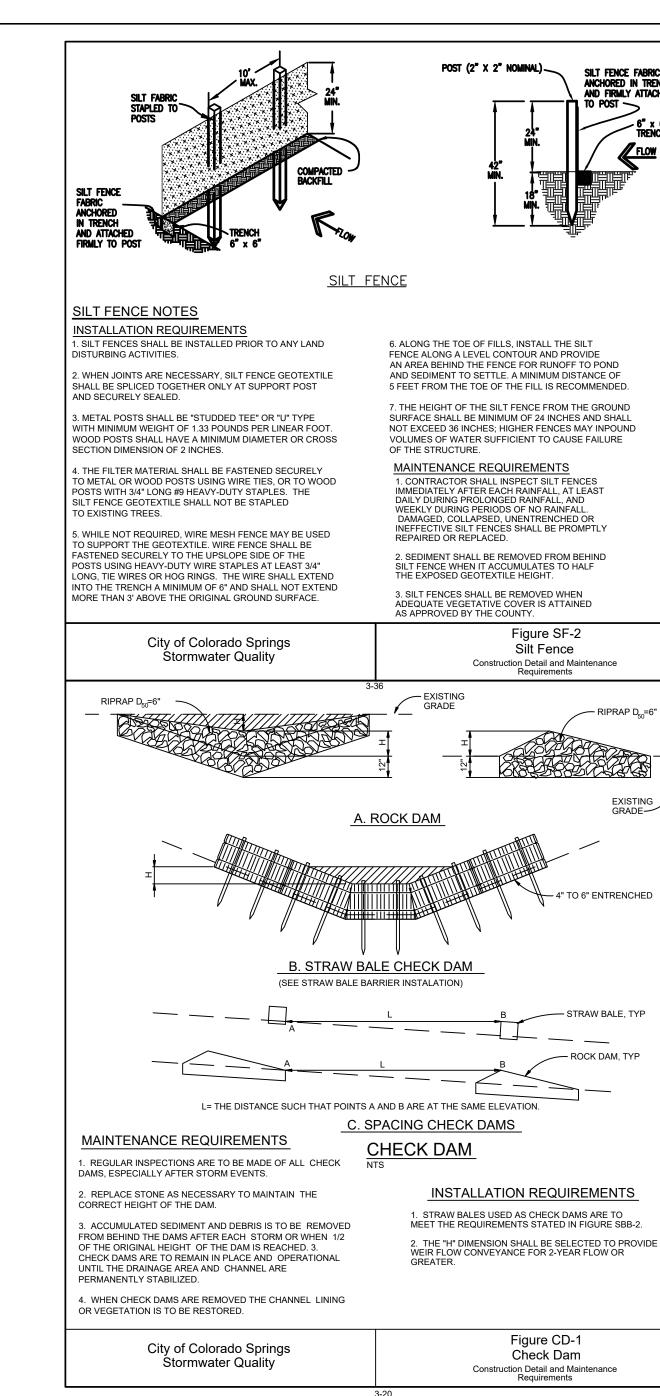

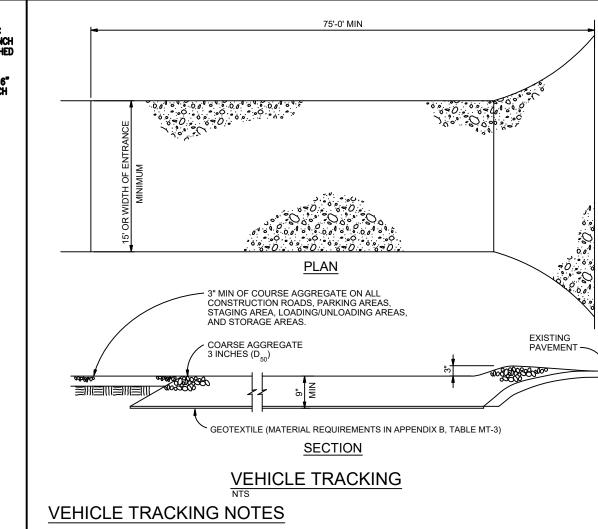

INSTALLATION REQUIREMENTS

1. ALL ENTRANCES TO THE CONSTRUCTION SITE ARE TO BE STABILIZED PRIOR TO CONSTRUCTION BEGINNING.

2. CONSTRUCTION ENTRANCES ARE TO BE BUILT WITH AN APRON TO ALLOW FOR TURNING TRAFFIC, BUT SHOULD NOT BE BUILT OVER EXISTING PAVEMENT EXCEPT FOR A SLIGHT OVERLAP.

3. AREAS TO BE STABILIZED ARE TO BE PROPERLY
GRADED AND COMPACTED PRIOR TO LAYING DOWN
GEOTEXTILE AND STONE.

4. CONSTRUCTION ROADS, PARKING AREAS,
LOADING/UNLOADING ZONES, STORAGE AREAS, AND
STAGING AREAS ARE TO BE STABILIZED.

5. CONSTRUCTION ROADS ARE TO BE BUILT TO
CONFORM TO SITE GRADES, BUT SHOULD NOT HAVE
SIDE SLOPES OR ROAD GRADES THAT ARE

City of Colorado Springs

Stormwater Quality

5. OTHER ASSOCIATED SEDIMENT CONTROL MEASURES
ARE TO BE INSPECTED TO ENSURE GOOD WORKING
CONDITION.

Figure VT-2
Vehicle Tracking

MAINTENANCE REQUIREMENTS

1. REGULAR INSPECTIONS ARE TO BE MADE OF ALL STABILIZED AREAS, ESPECIALLY AFTER STORM

2. STONES ARE TO BE REAPPLIED PERIODICALLY AND

3. SEDIMENT TRACKED ONTO PAVED ROADS IS TO BE REMOVED DAILY BY SHOVELING OR SWEEPING. SEDIMENT IS NOT TO BE WASHED DOWN STORM SEWER DRAINS.

4. STORM SEWER INLET PROTECTION IS TO BE IN

Application Examples

PLACE, INSPECTED, AND CLEANED IF NECESSARY

SEEDING MIX:	Al	MOUNT IN PLS
<u>GRASS</u>		BS. PER ACRE
CRESTED WHEAT GRASS PERENIAL RYE WESTERN WHEATGRASS SMOOTH BROME GRASS SIDEOATS GRAMA	EPHRAIM OR HYCREST LINN SARTON LINCOLN OR MANCHAR EPHRAIM	2.0 LBS. 3.0 LBS.
	TOTAL:	16.5 LBS.

SEEDING & FERTILIZER APPLICATION:

ON: DRILL SEED OR
HYDRO—SEED PER
CDOT SPEC. SECTION 212.

MULCHING APPLICATION:

PERIODIC SITE INSPECTIONS

RE-VEGETATION OF EXPOSED SOILS

SEDIMENT REMOVAL FROM BMP'S

CONFORM TO CDOT SPEC-SECTION 213.

SEDIMENT CONTROL MAINTENANCE PROGRAM:

FREQUENCY

BI-WEEKLY¹
WITHIN 21 DAYS OF GRADING

MONTHLY²

REMOVAL OF BMP'S AFTER STABILIZATION ACHIEVED

AND AFTER ANY PRECIPITATION OR SNOW MELT EVENT THAT
CAUSES SURFACE EROSION.

²ACCUMULATED SEDIMENT AND DEBRIS SHALL BE REMOVED WHEN THE SEDIMENT LEVEL REACHES ONE HALF THE HEIGHT OF THE BMP OR AT ANY TIME THAT SEDIMENT OR DEBRIS ADVERSELY IMPACTS THE FUNCTION OF THE BMP.

ESTIMATED TIME SCHEDULE:

NOTWITHSTANDING ANY DETAILS, NOTES OR PLANS SHOWN ON THESE

CONFORM TO EL PASO COUNTY STANDARDS AND POLICIES UNLESS

OTHERWISE APPROVED IN WRITING.

DRAWINGS, ALL EROSION CONTROL DESIGNS AND INSTALLATIONS SHALL

INSTALL BMP'S	APRIL, 2019
ROADWAY GRADING	APRIL, 2019
SEEDING & MULCHING	AUGUST, 2019
STABILIZATION	AUGUST, 2020

SETTLERS RANCH - FILING

ENGINEERING

19 E. Willamette Ave. Colorado Springs, CO 80903

PH: 719-477-9429 FAX: 719-471-0766 www.jpsengr.com



CALL UTILITY NOTIFICATION CENTER OF COLORADO

-800-922-1987

SALL 2-BUSINESS DAYS IN ADVANCE FORE YOU DIG, GRADE, OR EXCAVATE MARKED IN THE MENER OF THE MENER OF

 No.
 REVISION
 BY
 DATE

 ♠
 EPC COMMENTS
 JPS
 7/19/13

 ♠
 PH 2B PLAT SUBMITTAL
 JPS
 6/22/15

 ♠
 FLG-2C PLAT SUBMITTAL
 JPS
 9/30/18

 ♠
 FLG-2C PLAT SUBMITTAL
 JPS
 5/07/18

EROSION CONTROL NOTES & DETAILS

HORZ. SCALE:
NTS

VERT. SCALE:
N/A

SURVEYED:
RAMPART

CREATED:
4/05/18

PROJECT NO:
030501

DRAWN:
RMD


RMD


CHECKED:
JPS


LAST MODIFIED:
2/27/19

BJJ

C1.02C

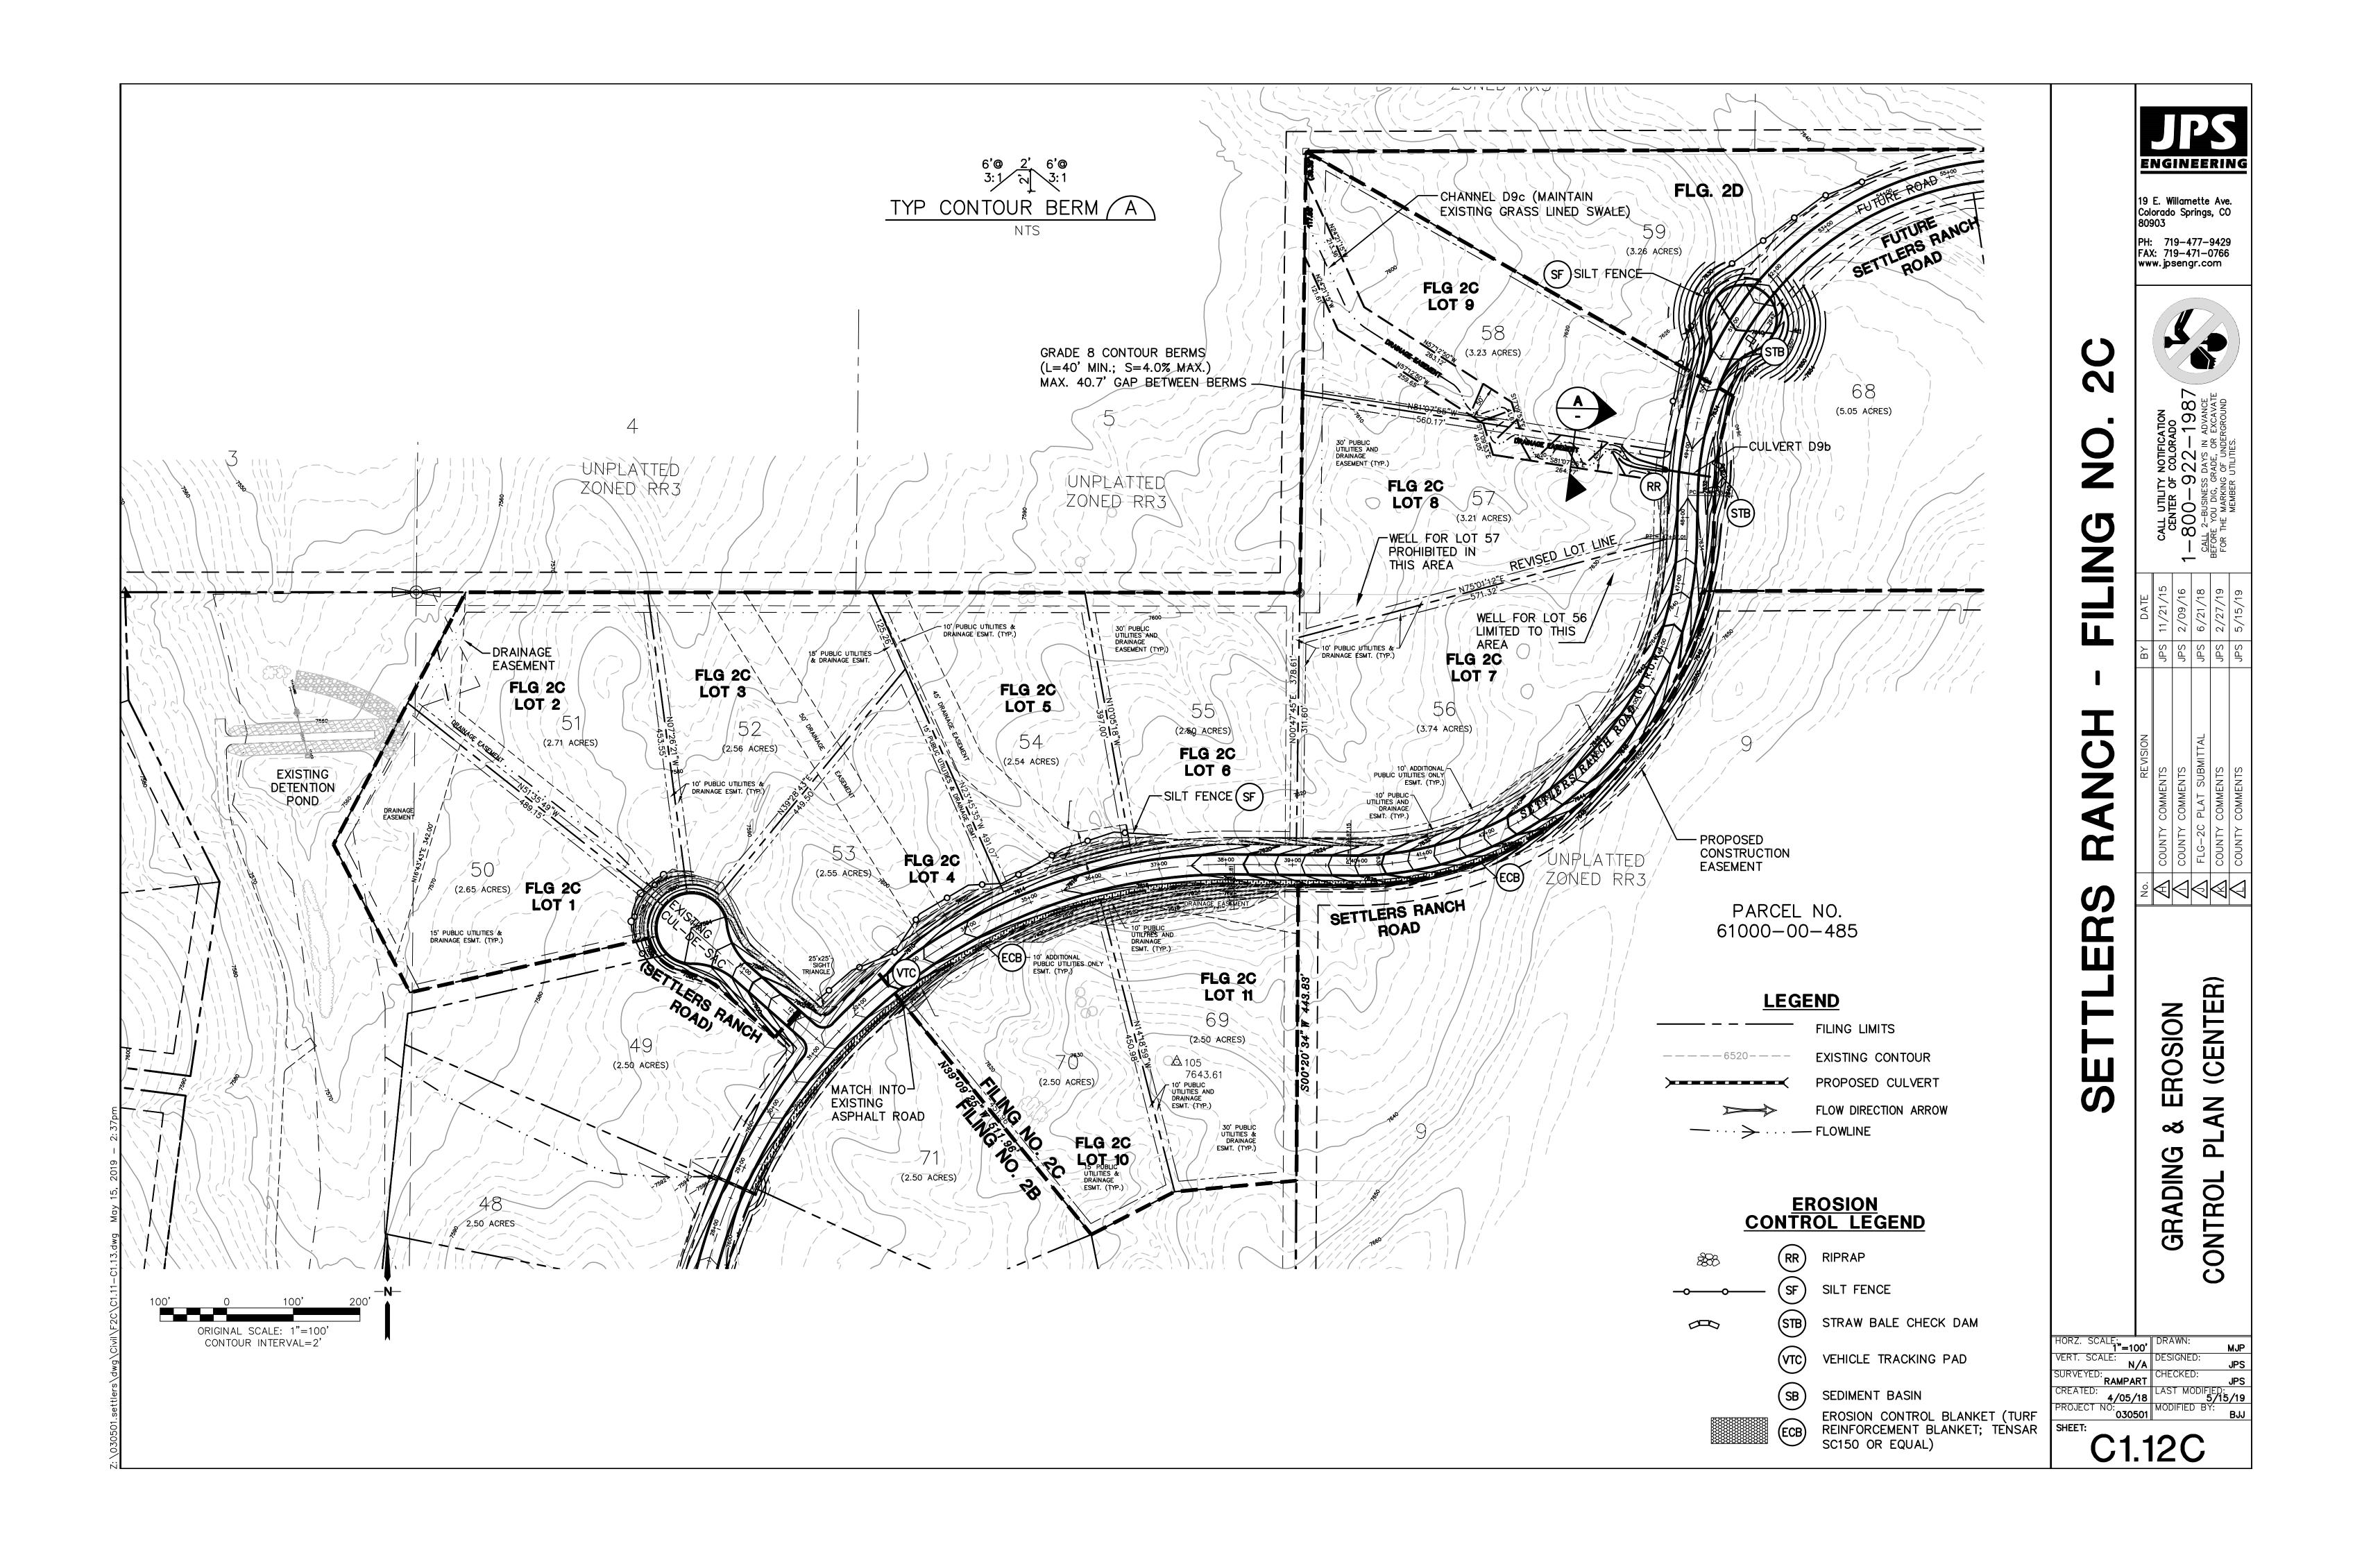

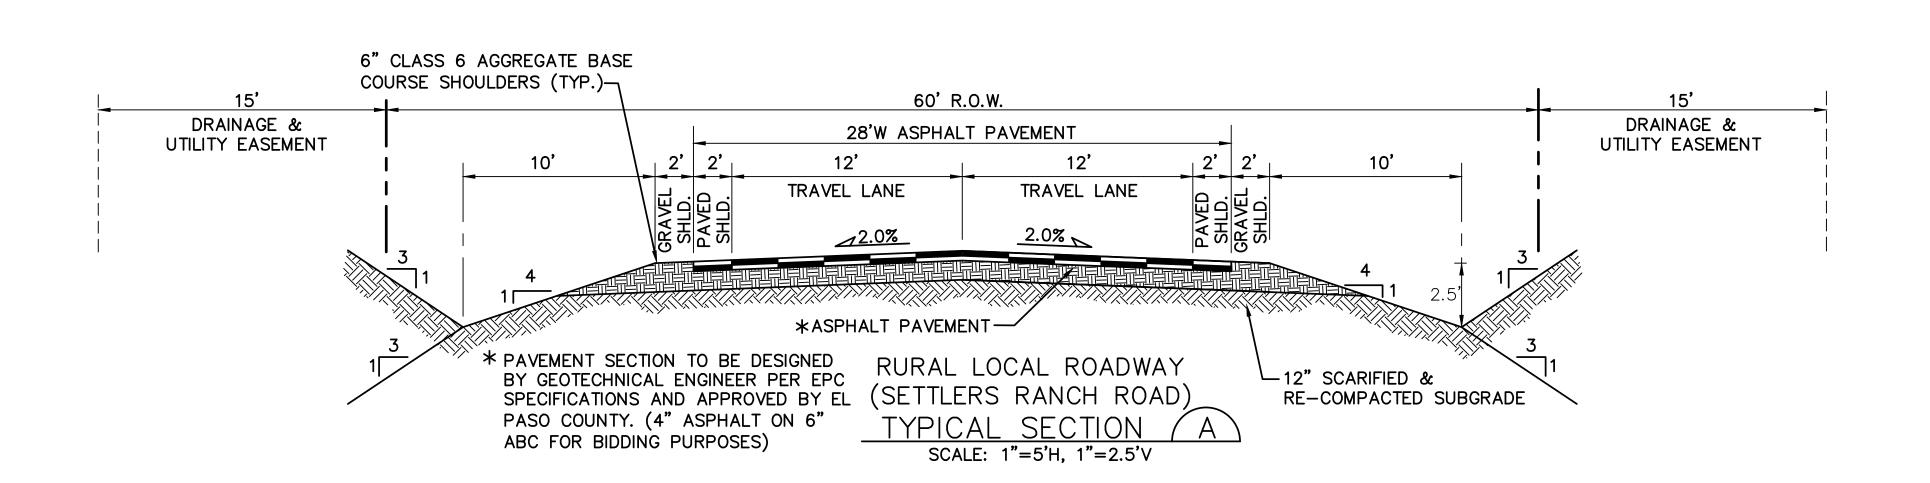


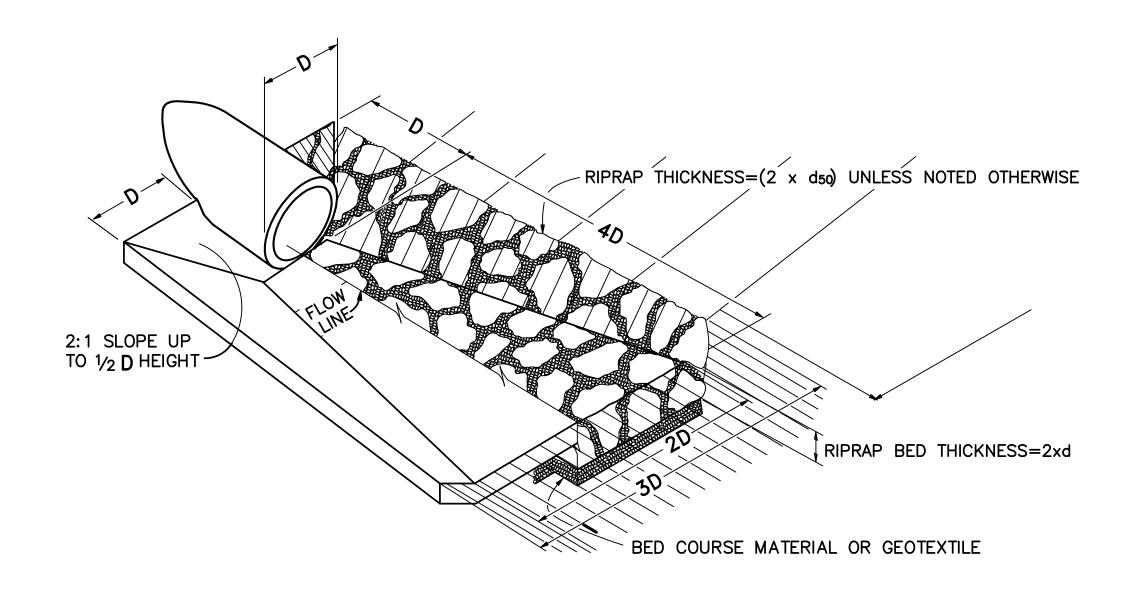

CULVERT	CULVERT SIZE	RR SIZE (d50)	RIPRAP APRON DIMENSIONS
D5c	36"	TYPE H (18")	15'Lx9'Wx3'T
D9b	18"	TYPE M (12")	8'Lx5'Wx2'T

TYPICAL RIPRAP APRON/
CULVERT OUTLET PAVING 1

NOT TO SCALE

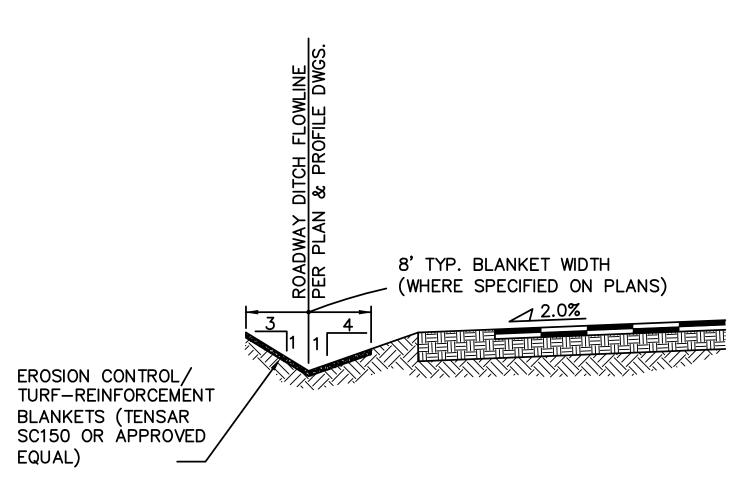

TYPICAL DITCH SECTION WITH EROSION CONTROL BLANKETS (C) SCALE : NTS

SETTLERS RANCH - FILING NO. 2C

SECTIONS

TYPICAL

TY1C


DETAILS


AND


ENGINEERING


19 E. Willamette Ave. Colorado Springs, CO 80903

PH: 719-477-9429 FAX: 719-471-0766 www.jpsengr.com

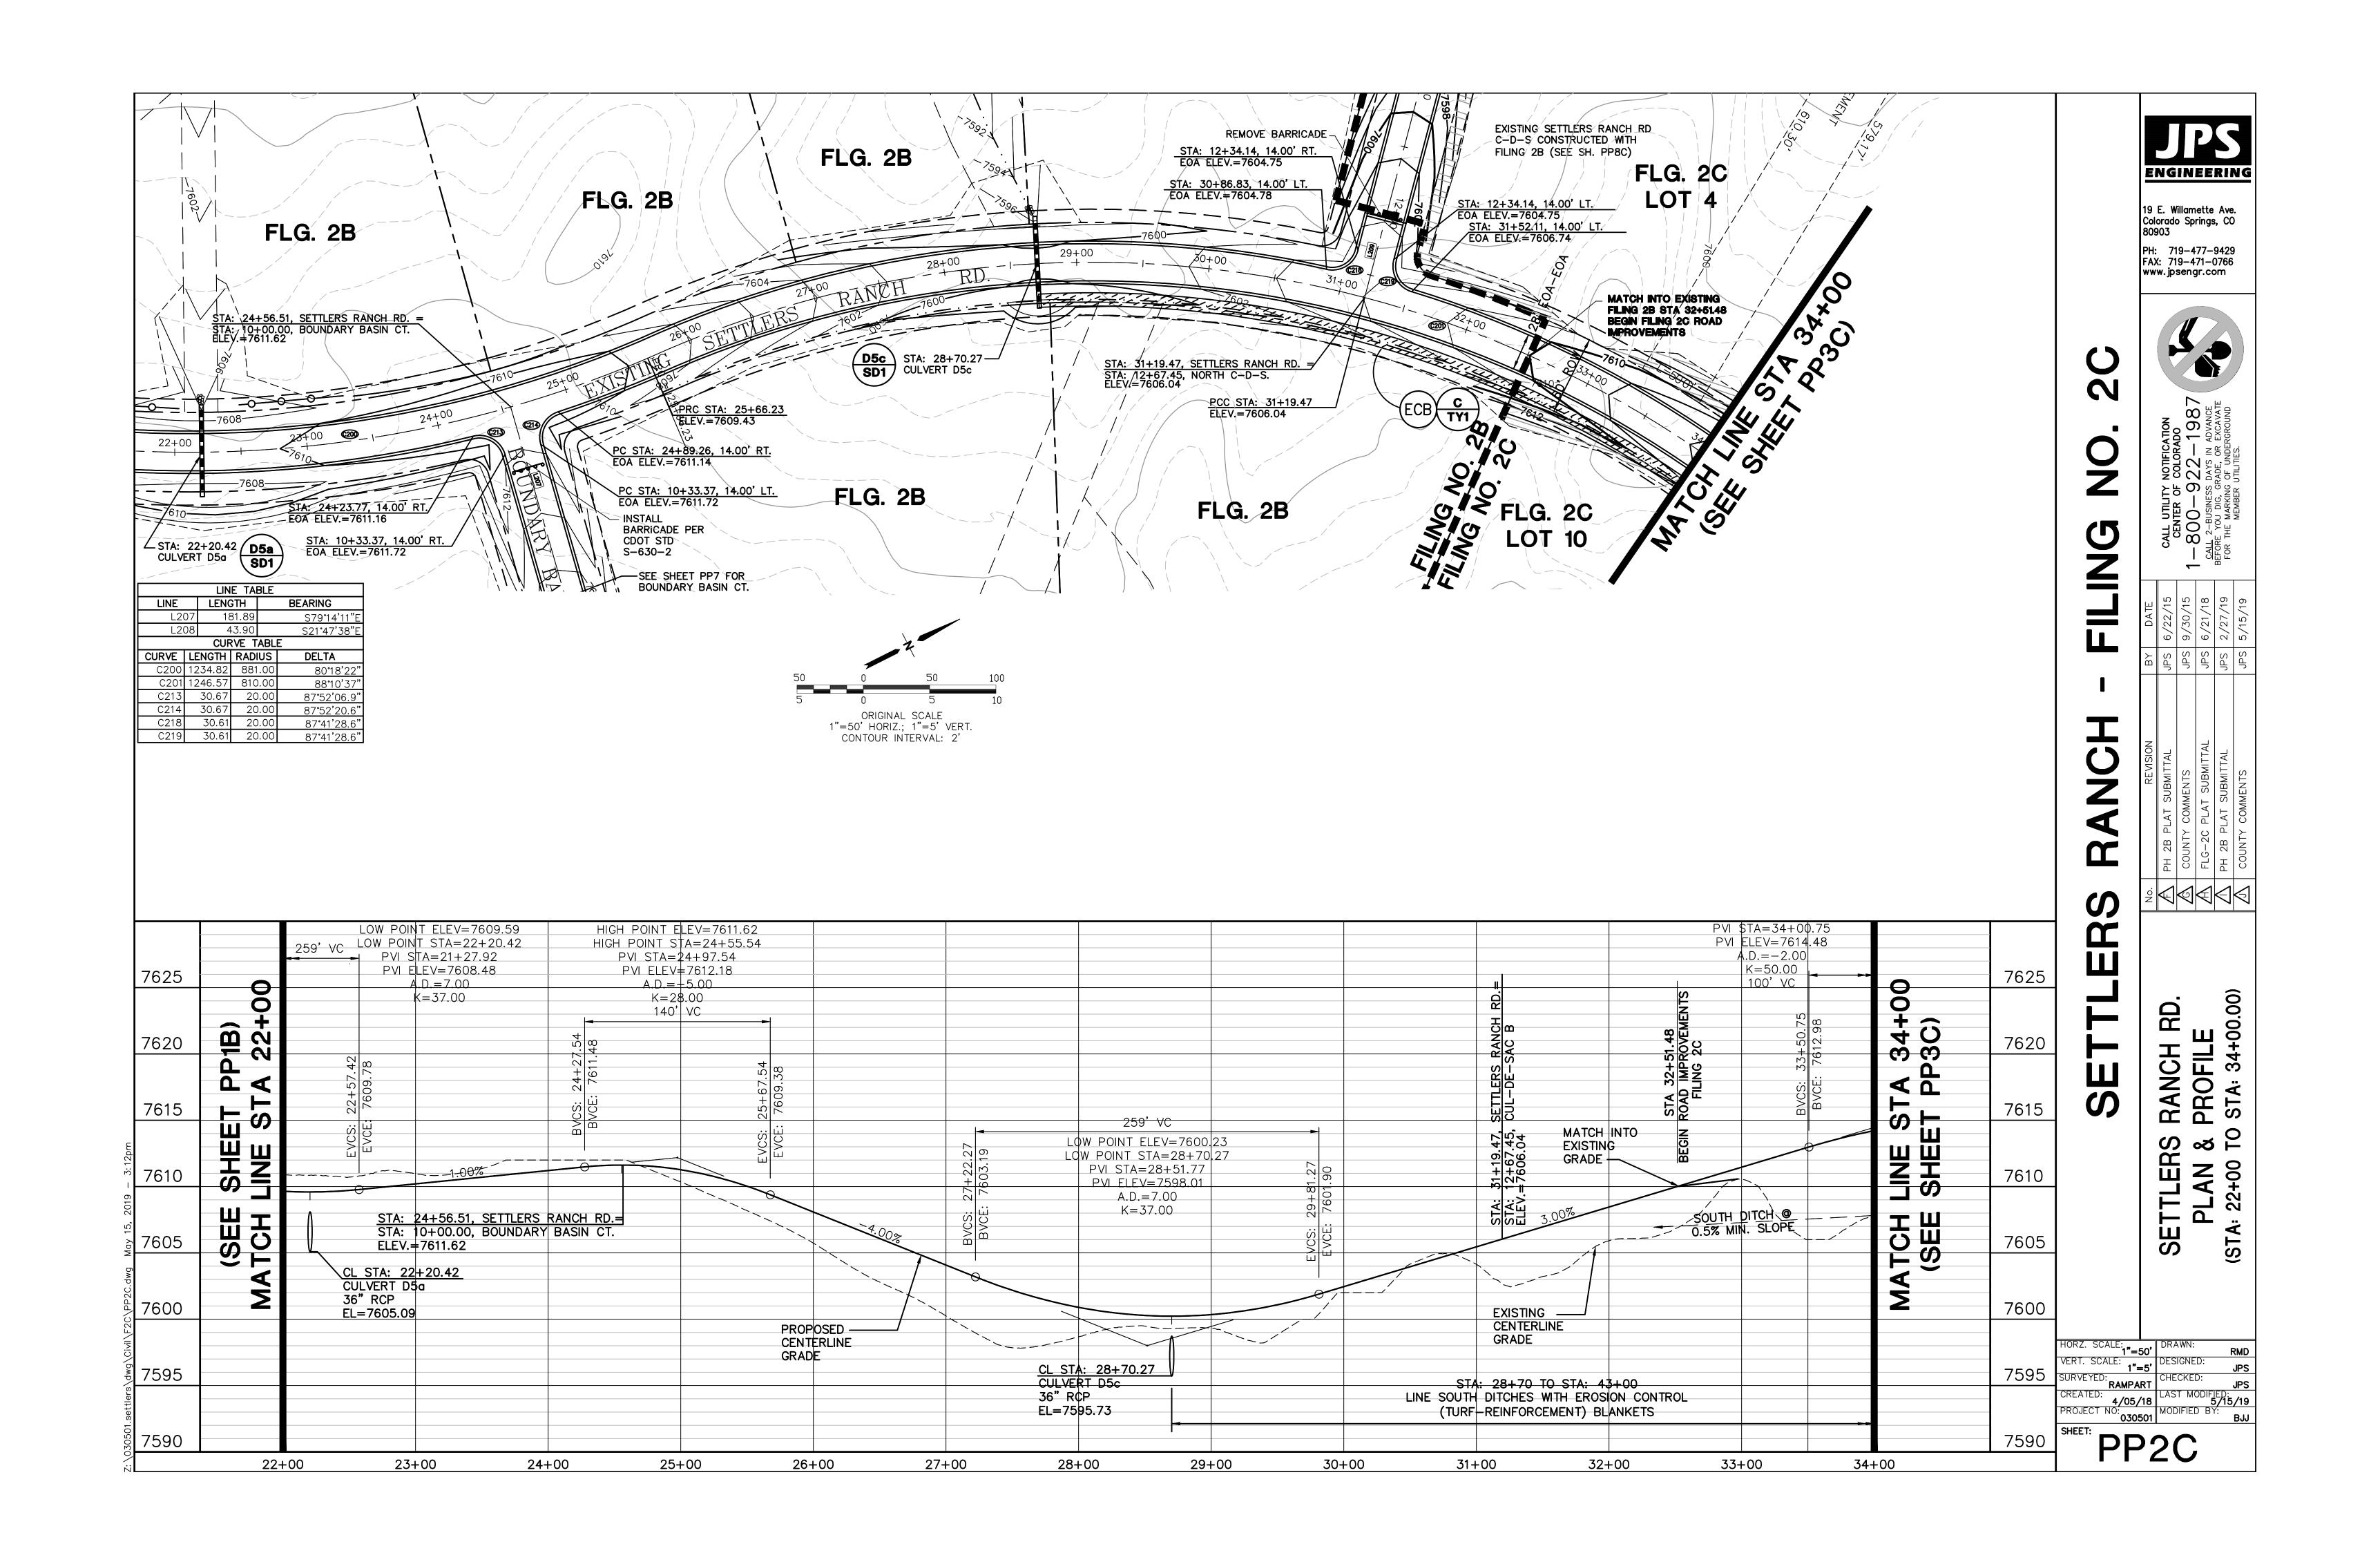

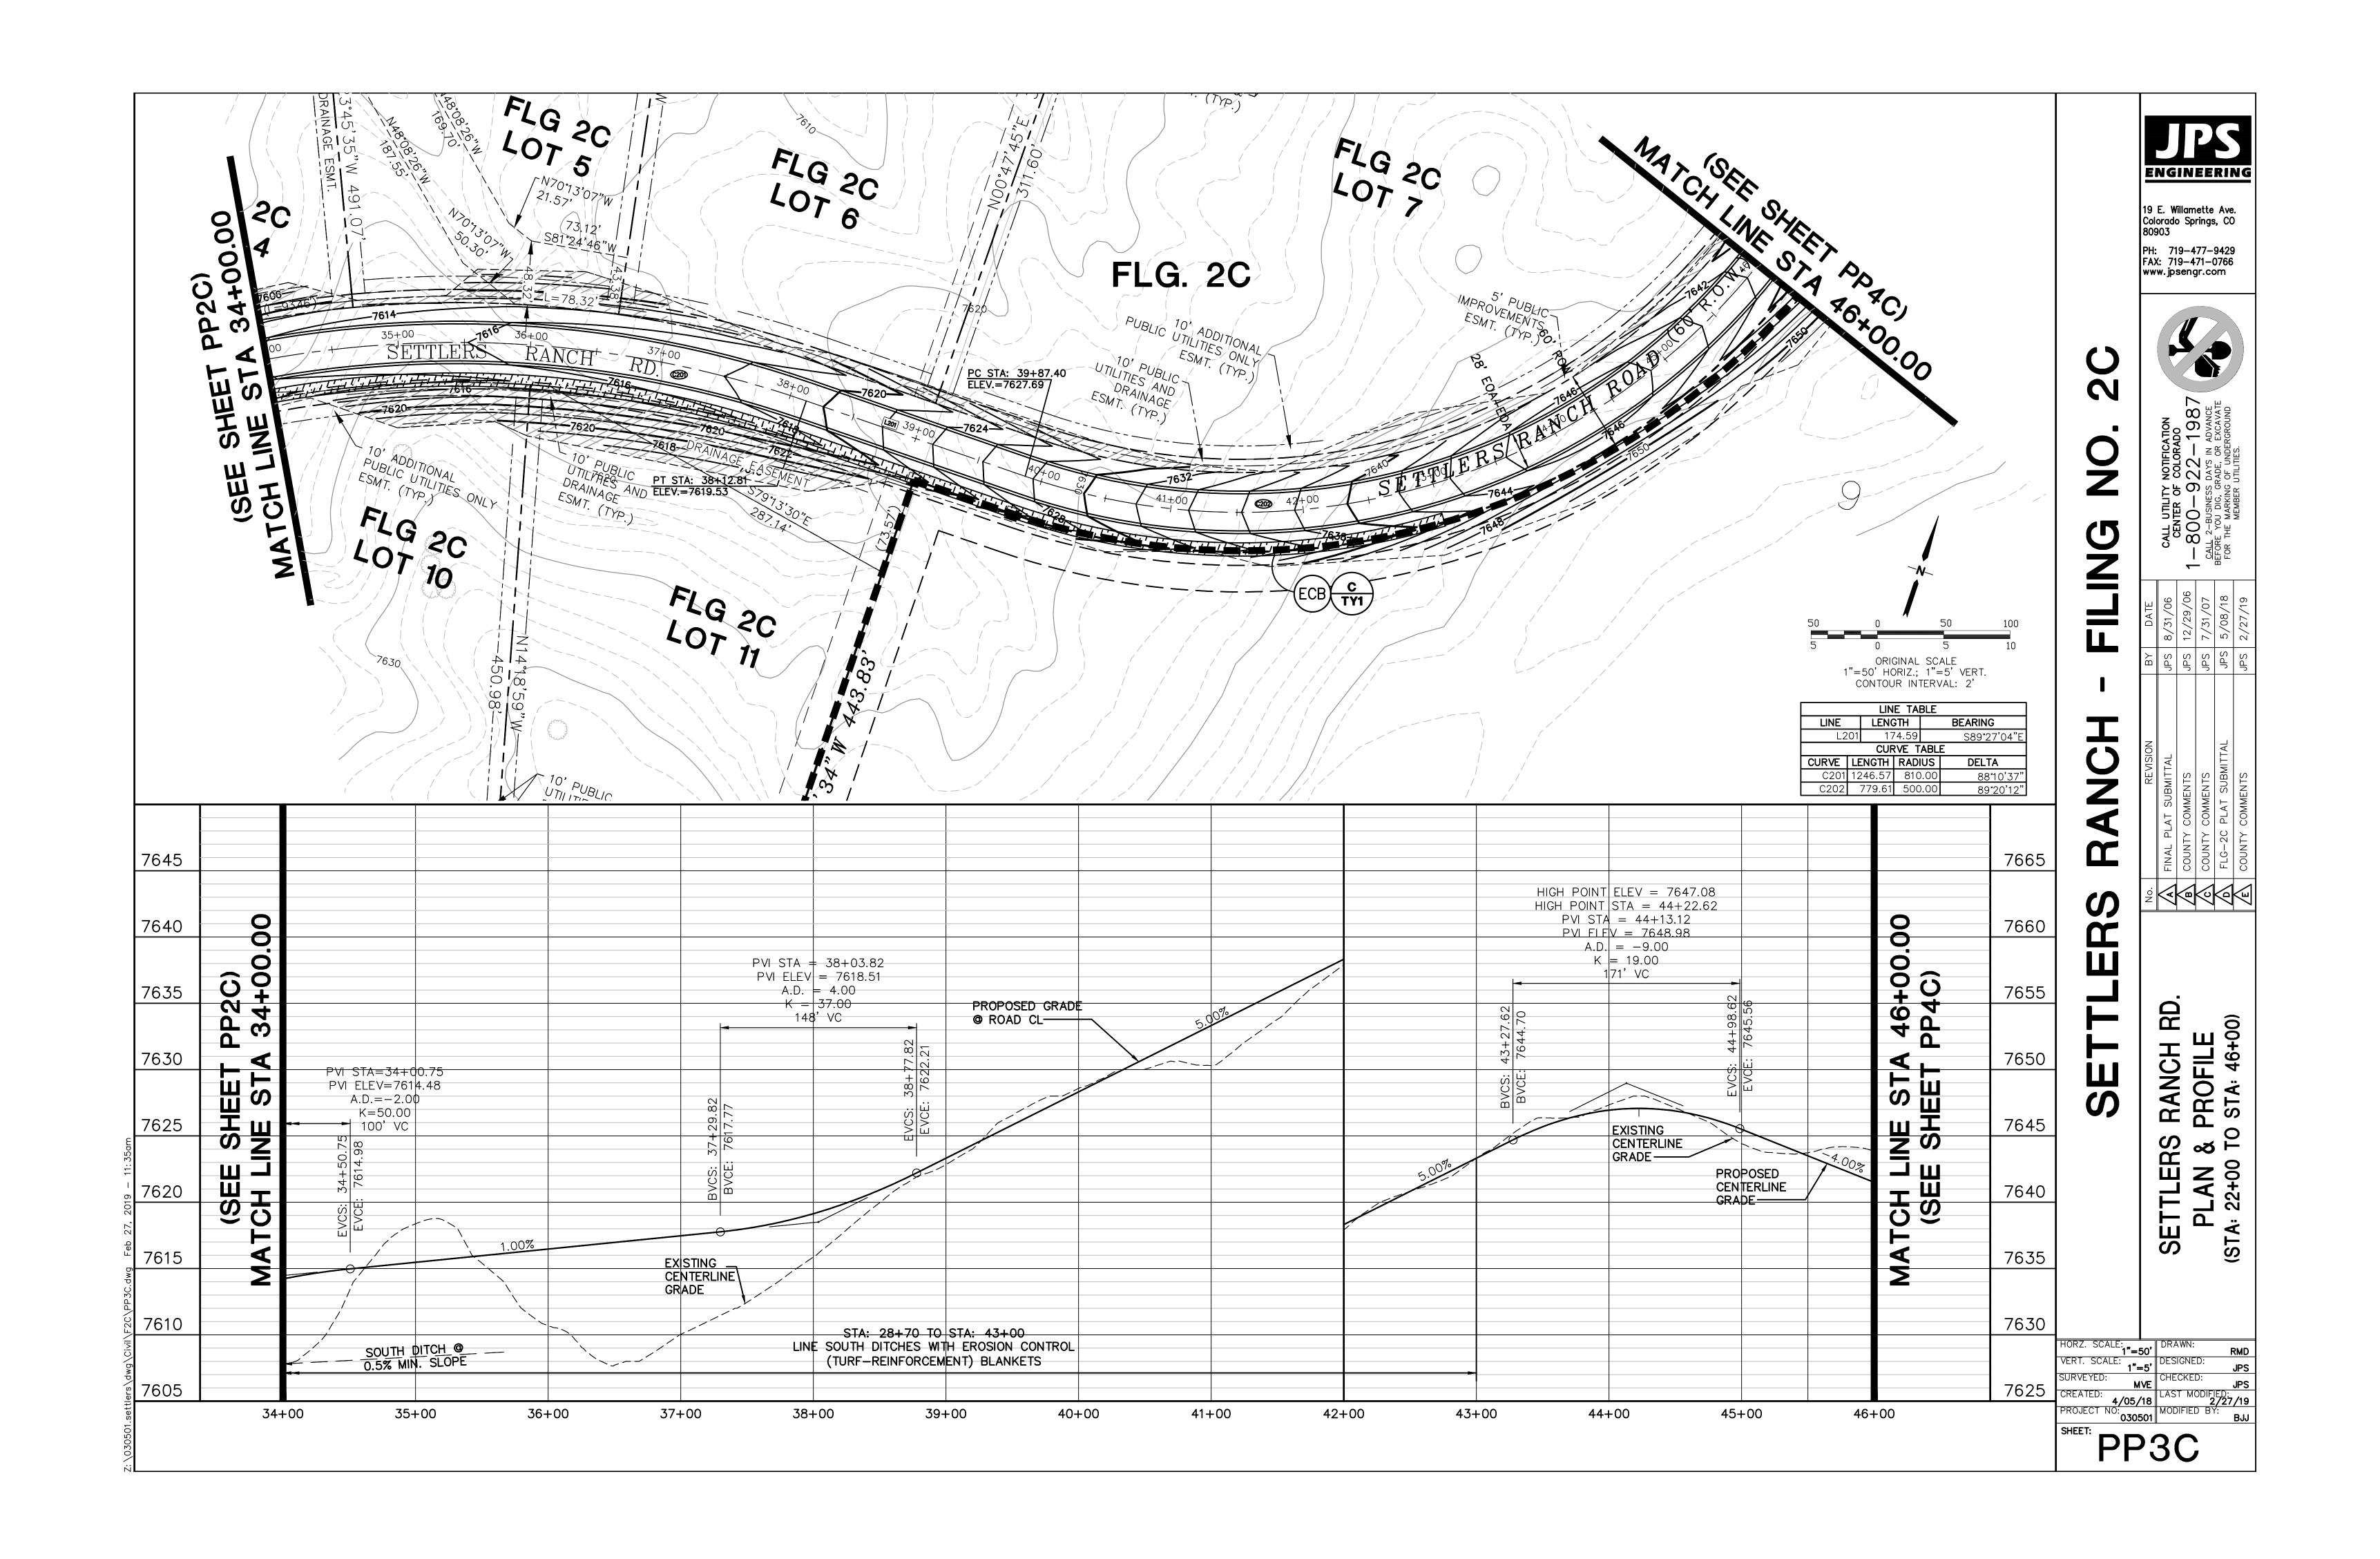

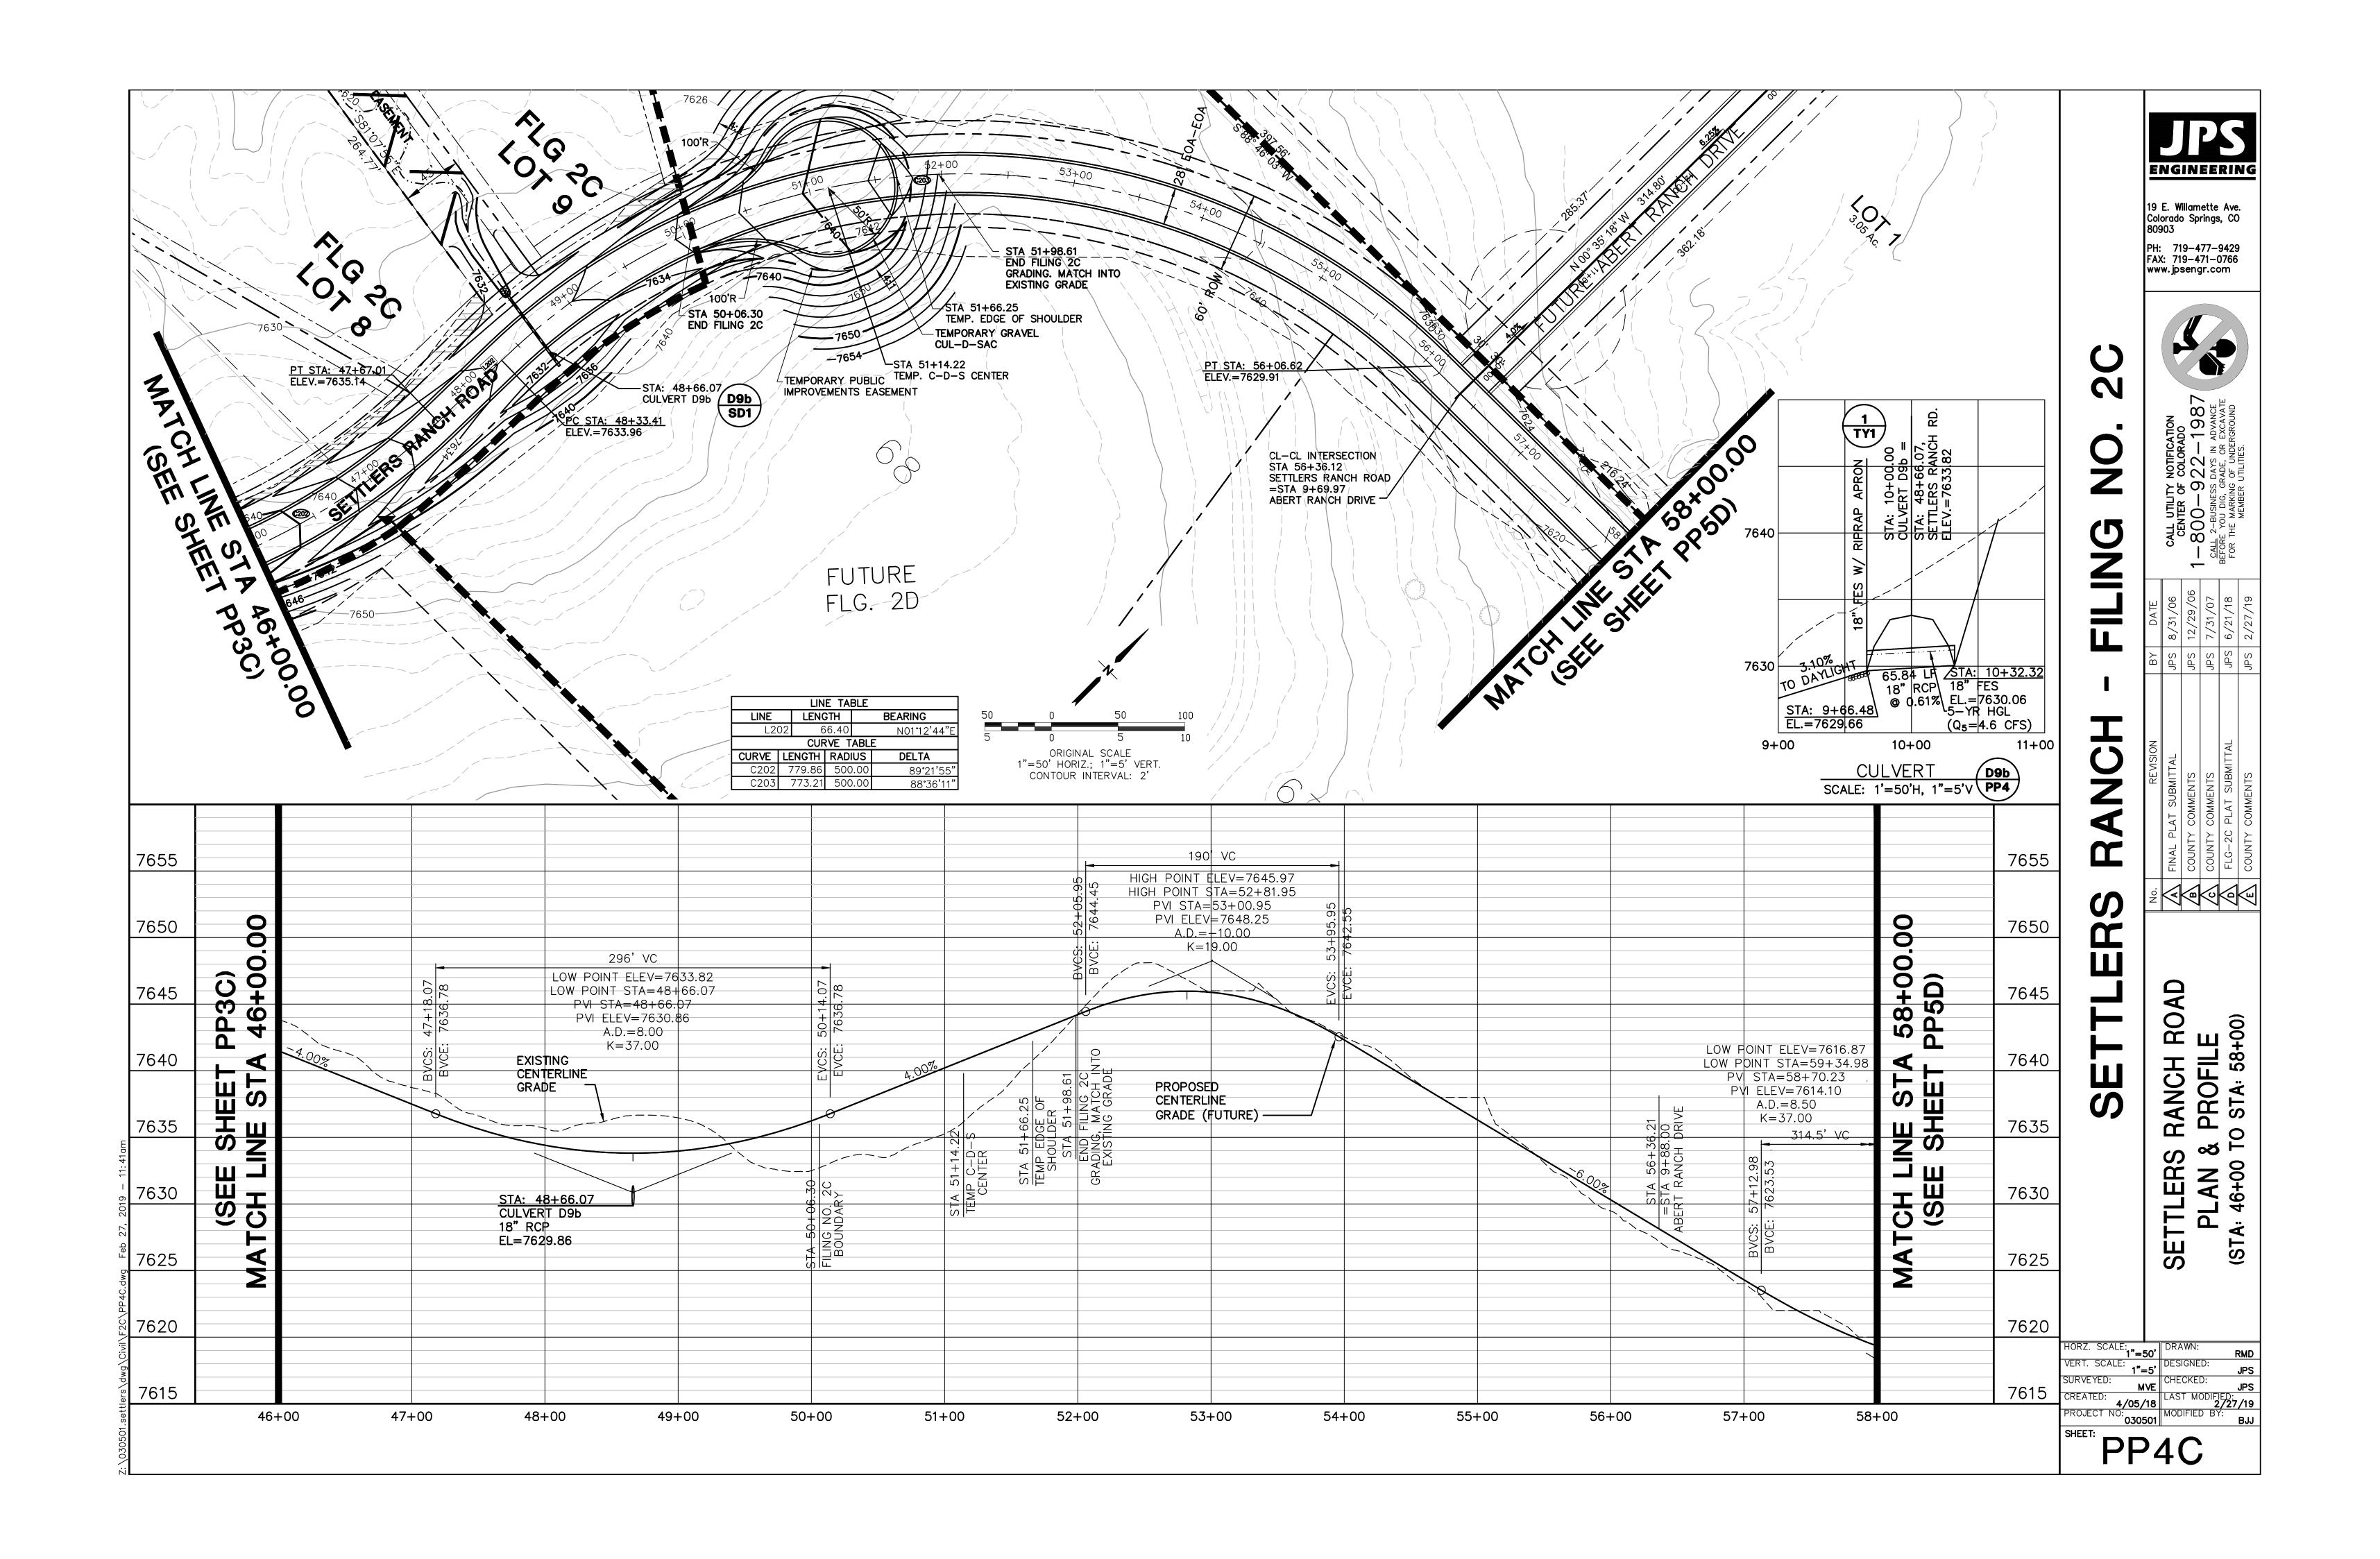

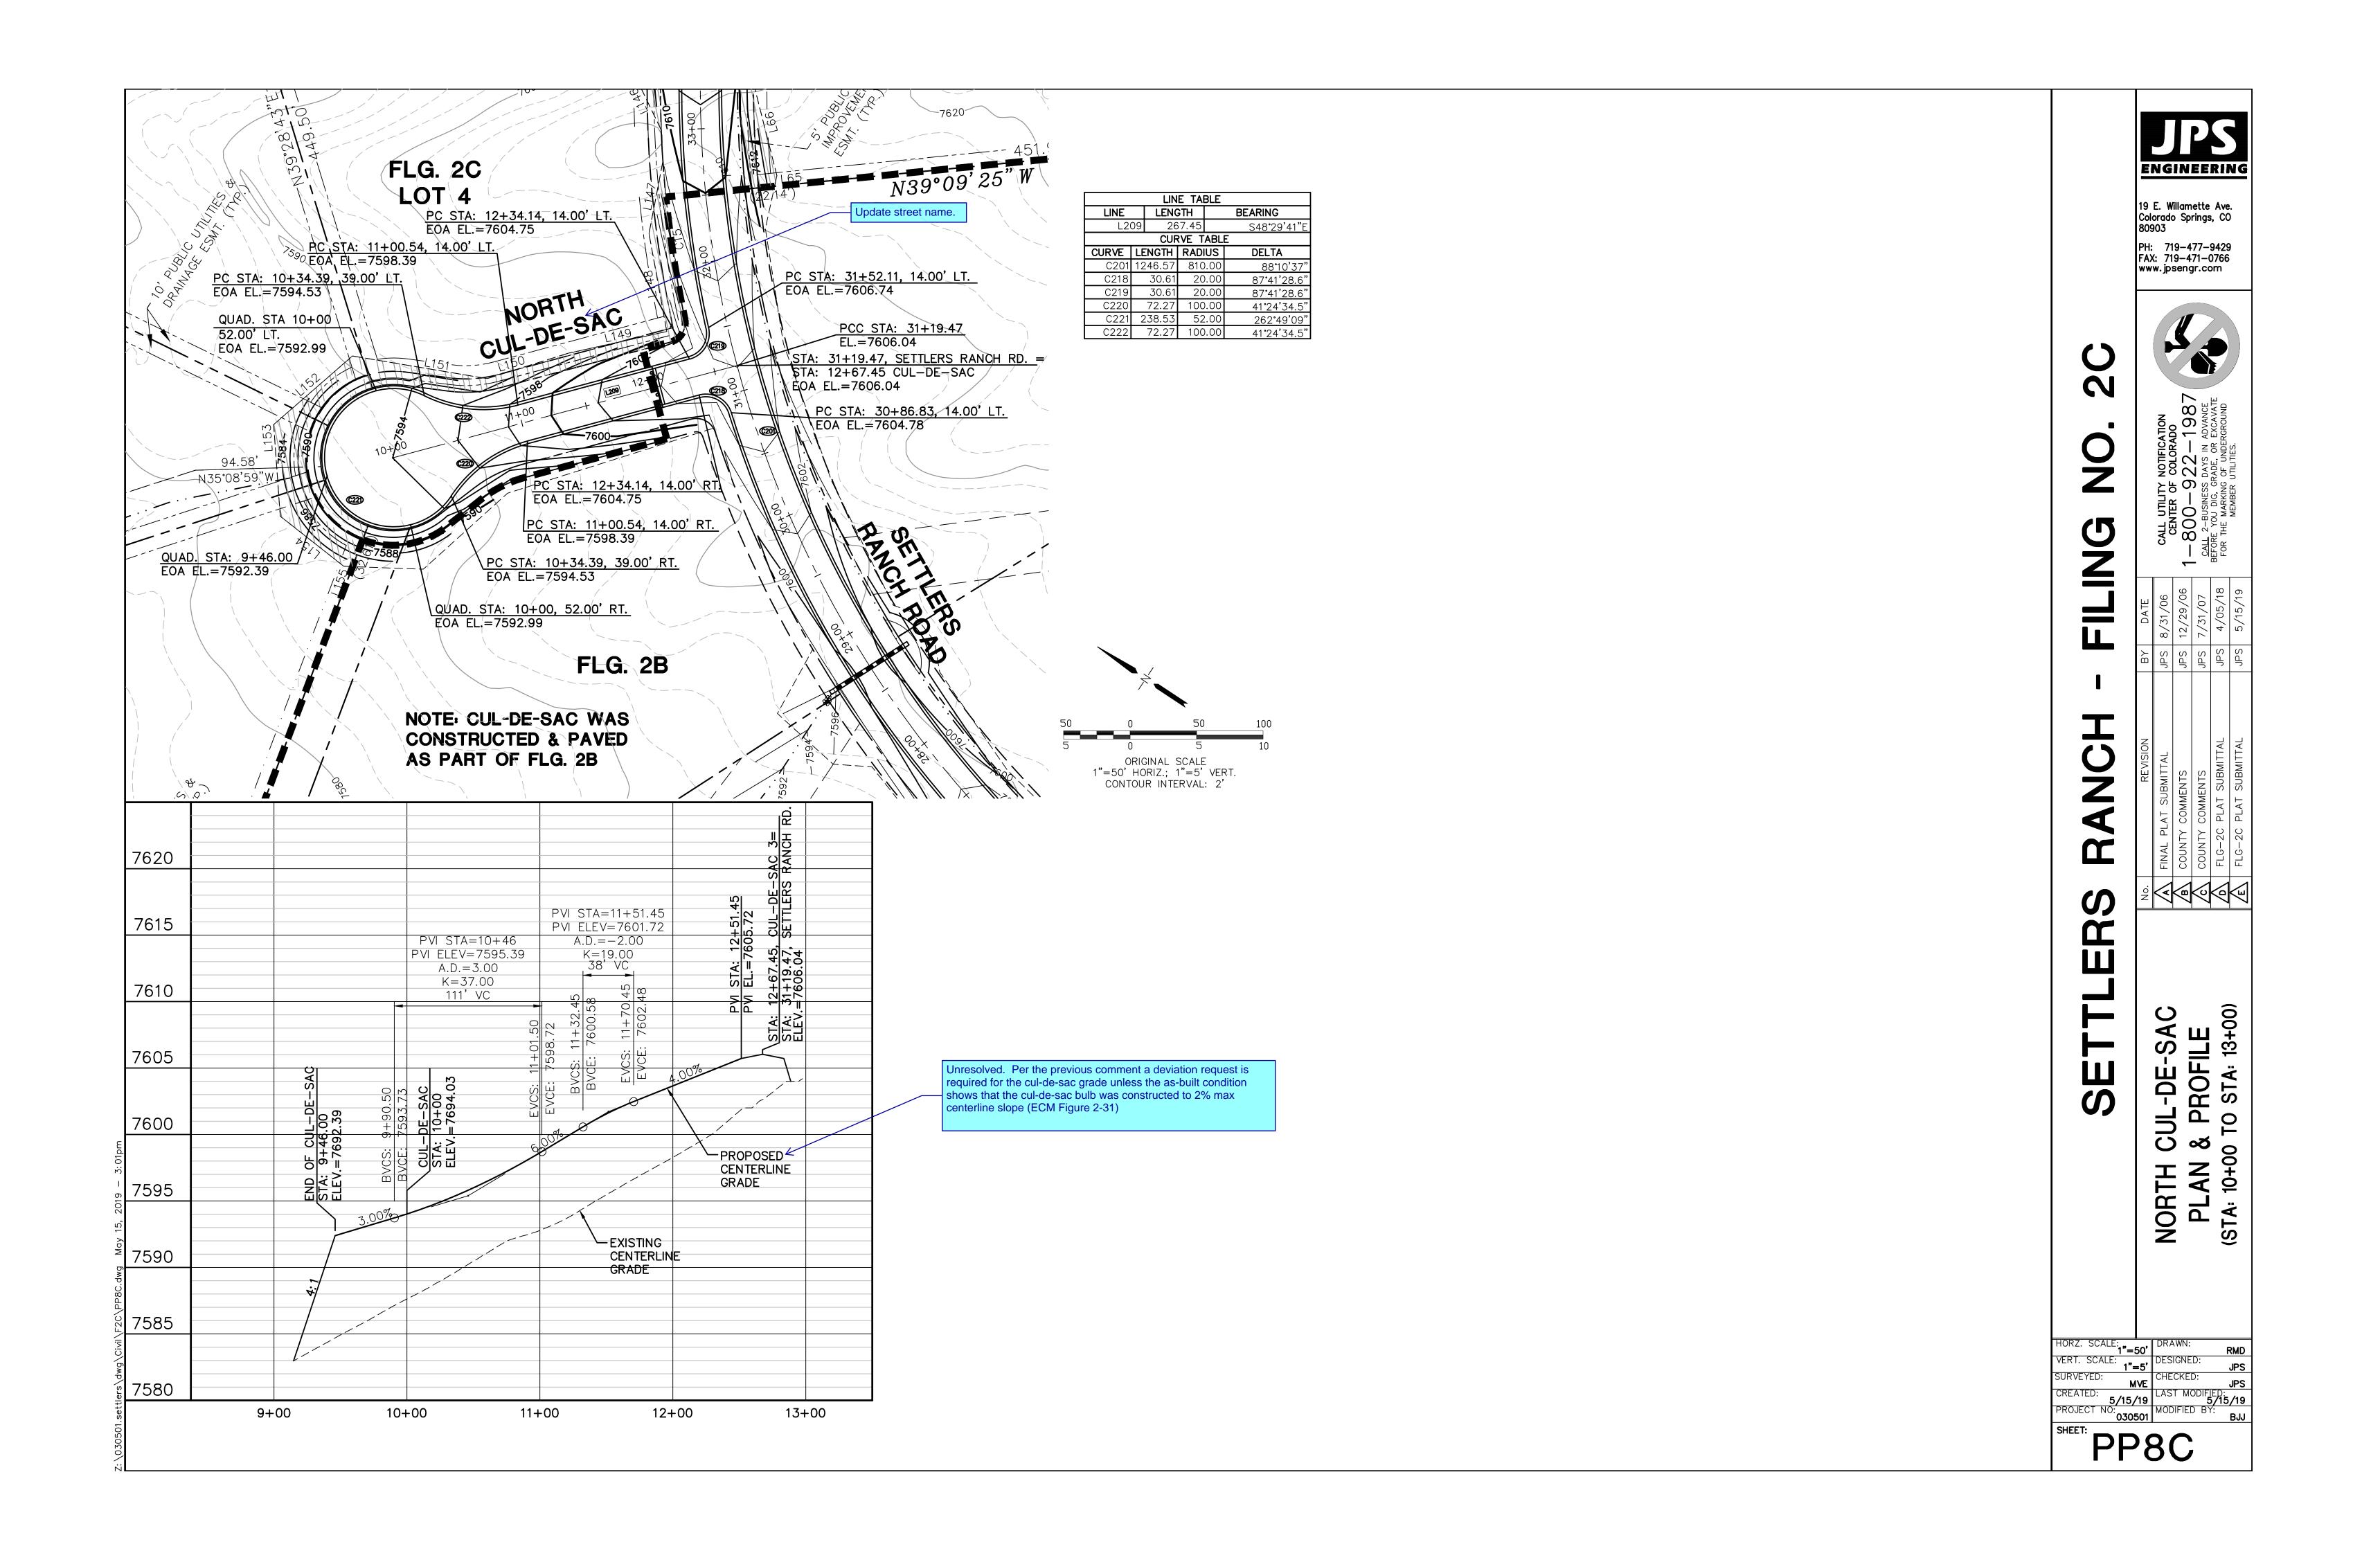

Markup Summary

Callout (2)



Subject: Callout Page Index: 11 Lock: Unlocked Author: dsdlaforce

Date: 5/22/2019 1:35:04 PM

Color:

Update street name.



Subject: Callout
Page Index: 11
Lock: Unlocked
Author: dsdlaforce

Date: 5/22/2019 3:20:22 PM

Color:

Unresolved. Per the previous comment a deviation request is required for the cul-de-sac grade unless the as-built condition shows that the cul-de-sac bulb was constructed to 2% max

centerline slope (ECM Figure 2-31)