

Traffic Memorandum

CONSTITUTION STORAGE DEVELOPMENT

El Paso County, Colorado

PREPARED FOR: Johnson Development Associates, Inc. 100 Dunbar Street, Suite 400 Spartanburg, SC 29306

PREPARED BY: Brian Horan, PE Max Rusch, PE

DATE: June 16, 2023

Accepted for File By: Gilbert LaForce, P.E. **Engineering Manager** Date: 08/03/2023 2:19:01 PM El Paso County Department of Public Works



PCD Filing No.: PPR-2224, P-225

Constitution Storage PCD No. P-225

Traffic Impact Study (Memorandum)

| Traffic Impact Study Engineer and Developer Statement | 3 |
|---|---|
| Traffic Impact Study | 4 |

Traffic Impact Studies

Traffic Engineer's Statement

The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.

Brian Horan P.E. #53042

6-16-23 Date

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

Bin Hom

6/20/23

Date

Brian Duncan, Development Manager Self-Storage Division Johnson Development Associates, Inc. 101 N. Pacific Coast Hwy, Suite 308 El Segundo, CA 90245



Traffic Impact Study (Memorandum):

Constitution Storage PCD No. P-225, PPR-2224



5500 Greenwood Plaza Blvd., Suite 200 Greenwood Village, CO 80111 303.770.8884 • GallowayUS.com

Memorandum



INTRODUCTION

This memorandum provides the results of a traffic analysis performed in support of an approximately 3.72-acre lot located in El Paso County, Colorado. Generally, the site is located south of Constitution Avenue, east of Peterson Road, and west of Canada Drive. The site is further identified as El Paso County parcel number 5405218002 and is currently vacant. The site location is shown on Figure 1.



Figure 1 – Site Location

The Applicant, Johnson Development Associates, proposes to develop the site with a 109,033 square foot self-storage (mini warehouse) use with 944 storage units. A full-sized copy of the site plan is provided as Attachment I. The following memorandum has been prepared for the County of El Paso as requested. The purpose is to determine the traffic forecasted by the proposed project and potential impacts to the surrounding roadways. A narrative for the study area for adjacent roadways, intersection and accesses is provided in the existing conditions section below.



EXISTING CONDITIONS

As shown on the site plan provided as Attachment 1, the site is proposed to be accessed via one full movement access along Canada Drive. Peterson Road and Constitution Avenue provide regional access to the property. No roadway improvements were identified in the area.

Constitution Avenue is constructed as a four-lane roadway divided by a raised median and auxiliary turn lanes provided at intersections. It is classified as an arterial by El Paso County and provides east-west connectivity throughout the region with a posted speed limit of 45 mph in the vicinity of the subject site. The intersection of Constitution Avenue/Peterson Road operates under signalized control and the intersection of Constitution Avenue/Canada Drive operates under unsignalized control.

Peterson Road is constructed as a four-lane roadway divided by a two way left turn (TWLT) lane. It is classified as a minor arterial by El Paso County and provides north-south connectivity throughout the region with a posted speed limit of 35 mph in the vicinity of the subject site. The intersection of Peterson Road/Constitution Avenue operates under signalized control.

Canada Drive is constructed as an undivided two-lane roadway. It is classified as a local roadway by El Paso County and primarily provides north-south access to a number of residential units in the region with a posted speed limit of 25 mph in the vicinity of the subject site. The intersection of Canada Drive/Constitution Avenue operates under unsignalized control. ADTs and peak hour traffic along this roadway are consistent with the roadway section and operates with additional capacity available.

The Major Transportation Corridor Plan (MTCP) was reviewed to determine if any roadway improvements were anticipated in the immediate study area. No such improvements were identified. Additionally, at the time of this writing, no improvements from area development were identified that would impact the proposed development.

Streetlight was used to generate turning movement counts at the intersection of Peterson Rd & Constitution Ave. Streetlight is a program that collects locations records from smartphones as well as connected cars and trucks and can use this data to produce turning movement counts. The Streetlight turning movements were then balanced with ADT counts on the MS2 website, taken in 2021. Figure 2 shows the existing volumes at the intersection of Peterson Rd & Constitution Ave.

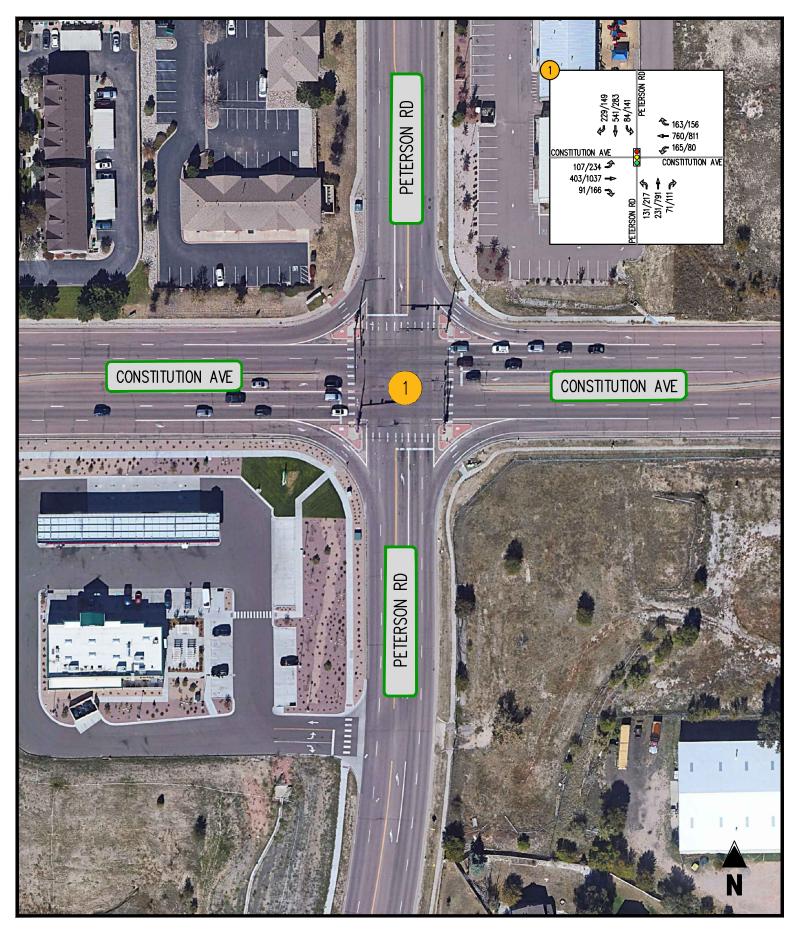


FIGURE 2 Existing Volumes

0000/0000 (AM PEAK HOUR/PM PEAK HOUR)





TRIP GENERATION

Trip generation forecasts for the site were based on rates/equations published in the Institute of Transportation Engineers (ITE) Trip Generation Manual, 11th Edition and industry standard methodologies. The trip generation of the proposed development are provided in Table 1 below. The use is expected to generate 11 AM peak hour, 16 PM peak hour, and 170 average daily trips upon completion.

The site trips would be all oriented to Constitution Avenue. As required by the County, an assessment of 20 year projections for this area would suggest minimal increase. Limited development or redevelopment options exist in the area that would increase traffic at the proposed entrances. It is anticipated that short and long range forecasts at the entrance would remain relatively consistent with existing conditions. A site trip figure has been provided as Figure 3.

As mentioned above, the Applicant is proposing one full movement access to the site via Canada Drive. Currently, Constitution Avenue has auxiliary lanes in both the east and westbound directions at the Canada Drive intersection. Based on the trip generation contained herein, the proposed development would not significantly impact the surrounding corridor.

ANALYSIS

As shown in Attachment I, the project proposes a full movement access along Canada Drive. As shown in Table 1, the site would generate very few peak hour trips. Assuming some distribution of trips to the entrance, the access and surrounding intersections would experience fewer than 10 peak hour turning movements at any location.

The signal of Peterson Rd & Constitution Ave was modeled in Synchro using the volumes from Figure 2. The Synchro reports have been attached to this memo. As reported by Synchro no existing capacity or queueing issues were identified at the signalized intersection. The proposed trip generation would have no impact on the results of the capacity and queueing analysis.

SAFETY

As requested by the County, accident data in the area was pulled as provided by the State. As shown in Figure 4 below, no accidents were reported in this area for the last 10 years. Due to the extremely low generation of trips the proposed use represents it is not anticipated to have an impact on safety to this area.

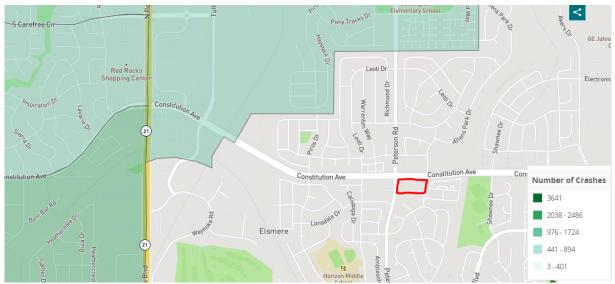


Figure 4 – Police Accident Data Map 2016-2022

Traffic Memorandum


Table 1

JDA - Constitution Storage

Site Trip Generation

| | Land Use | | AN | Peak H | lour | PM Peak Hour | | | Average Daily | |
|--|-------------|--------|-------|--------|------|--------------|----|-----|------------------|-------|
| Land Use | Code | Amount | Units | In | Out | Total | In | Out | Total | Trips |
| <i>Proposed</i> ⁽¹⁾ Mini-Warehouse | 151 | 944 | UNITS | 6 | 5 | 11 | 8 | 8 | 16 | 170 |

Note(s): (1) Trip generation based on the Institute of Transportation Engineers' <u>Trip Generation Manual</u>, 11th Edition

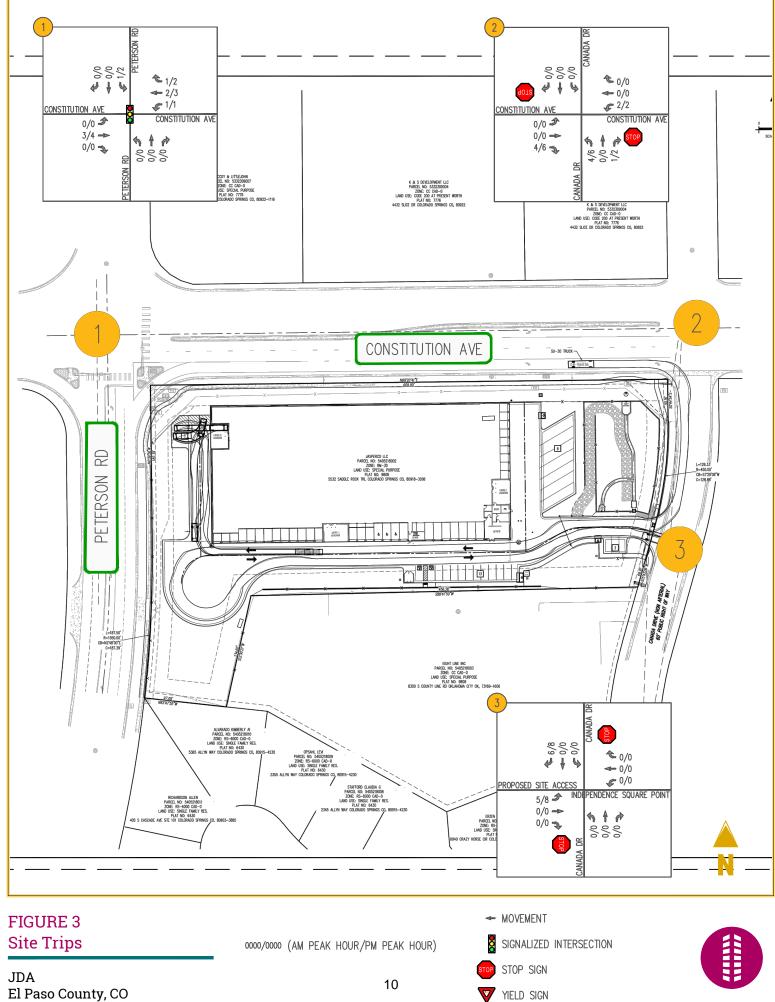


El Paso County, CO

CONCLUSIONS

- 1. The subject site is a standalone project in the County of El Paso, Colorado.
- 2. The proposed project is forecasted to generate 11 new AM trips, 16 new PM trips, and 170 new daily trips on average.
- 3. Auxiliary lanes current exists in both the east and westbound directions on Constitution Avenue at Canada Drive.
- 4. Based on the trip generation contained herein, the proposed mini warehouse use development would not significantly impact the surrounding roadways. Short and long range forecasts for the access locations would remain generally consistent with existing conditions.
- 5. No improvements are required or recommended above and beyond what is required on site for the construction of the use.
- 6. No safety concerns are anticipated with the approval of the access locations as shown.
- 7. Road Impact Fees will be due by the Applicant at the last land use approval consistent with the use and Impact Fee schedule.

We trust that the information contained herein satisfy the request of the County of El Paso, Colorado. If you have any questions or need further information, please contact Brian Horan at <u>BrianHoran@GallowayUS.com</u> or 303-770-8884.

Attachment I Site Plan Synchro Reports

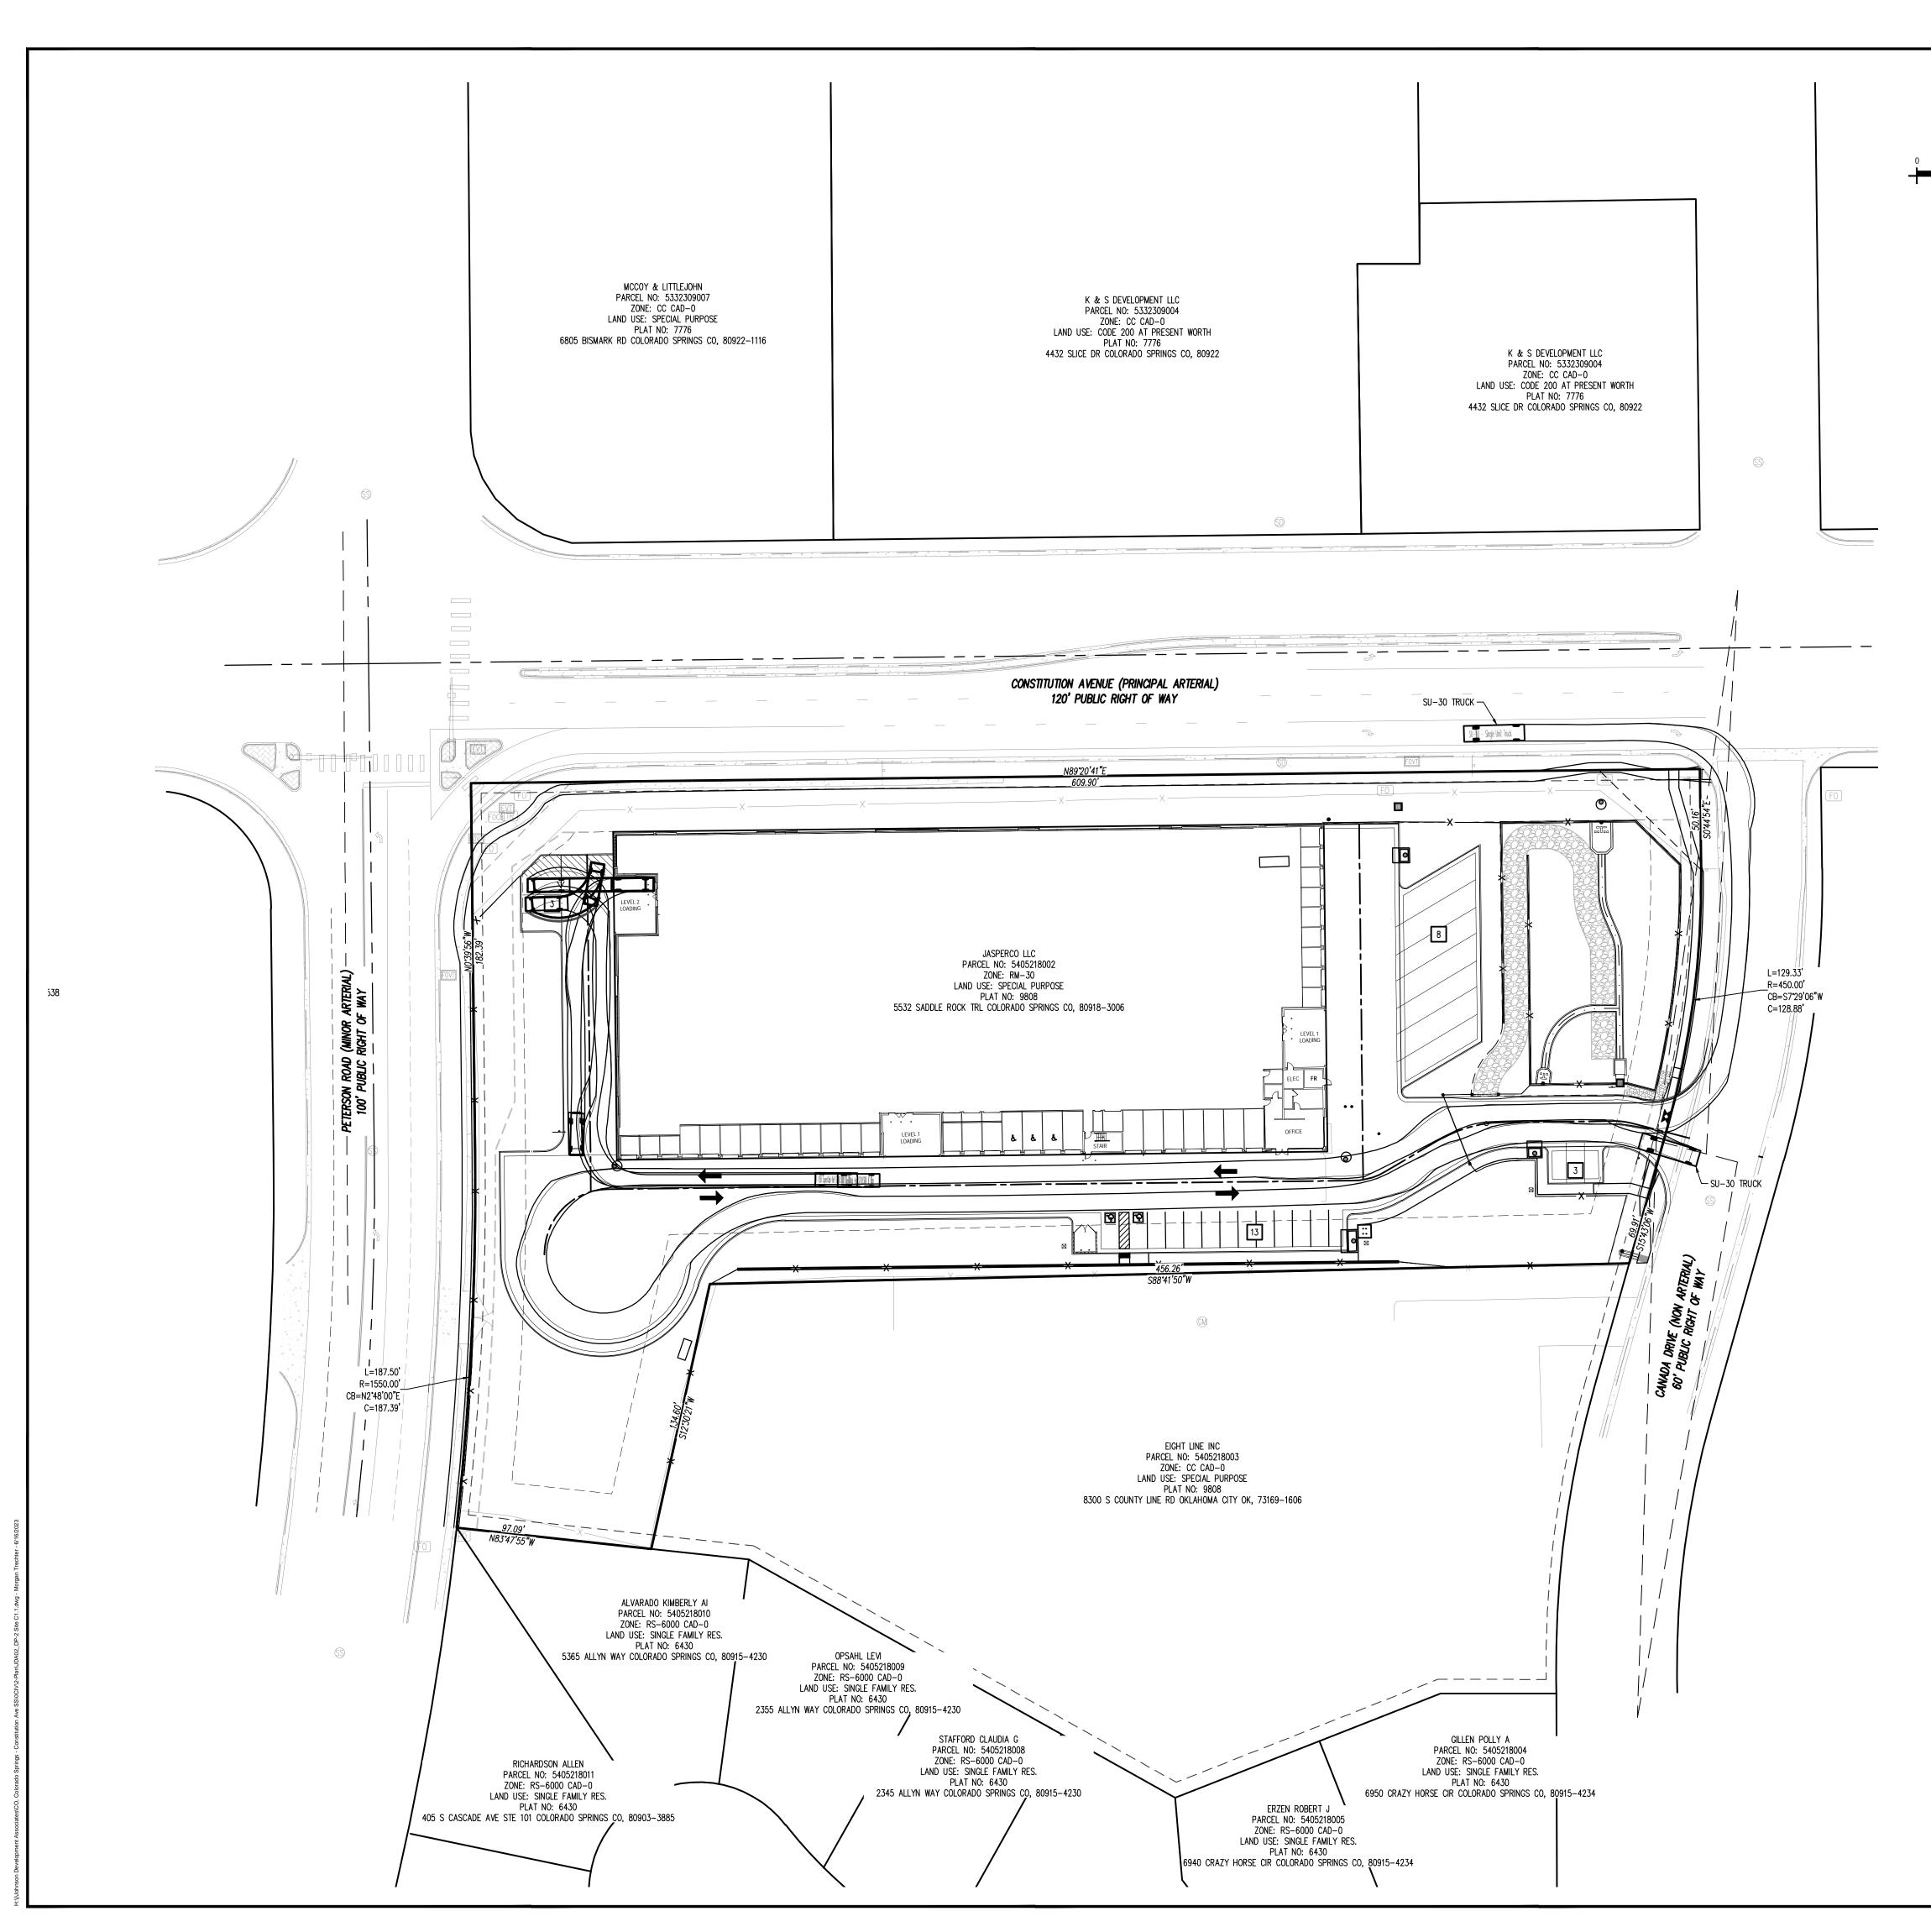

<u>SITE LEGEND</u>

| | PROPERTY BOUNDARY LINE |
|---|--|
| | ADJACENT PROPERTY BOUNDARY LINE |
| | ADJACENT LOT LINE |
| | RIGHT OF WAY BOUNDARY LINE |
| | EXISTING BUILDING |
| | |
| | EXISTING EASEMENT LINE |
| | PROPOSED EASEMENT LINE |
| $\rightarrow \cdots \longrightarrow \cdots \longrightarrow$ | PROPOSED SWALE FLOWLINE |
| | EXISTING LANDSCAPE BUFFER |
| XX | EXISTING FENCE |
| · · · | EXISTING CURB & GUTTER |
| | EXISTING WATER LINE |
| | PROPOSED WATER LINE |
| | EXISTING SANITARY SEWER |
| — SS — | |
| — — — — UE— — — — G— | EXISTING UNDERGROUND ELECTRIC |
| | Existing fiber optic |
| · - | PROPOSED ROAD CENTERLINE |
| | |
| | PROPOSED CURB & GUTTER |
| | PROPOSED SIDEWALK |
| | |
| | PROPOSED ADA ROUTE |
| | PROPOSED BUILDING |
| Δ. Δ | EXISTING CONCRETE PAVING |
| ۹ | PROPOSED CONCRETE PAVING |
| 4 | |
| FO FOR FOUT | EXISTING FIBER OPTIC STRUCTURES |
| | |
| (FO) FOOR FOUT | Existing fiber optic structures |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE |
| (FO) FOOR FOUT | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER |
| (FO) FOOR FOUT | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE |
| (FO) FOOR FOUT | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT |
| FO COM FOUT TR \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING SIGN |
| FD 603 FOVT TR -\$- \$D \$\$ 6\$ | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING SIGN EXISTING GAS METER |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING SIGN EXISTING GAS METER EXISTING SANITARY SEWER |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING SIGN EXISTING GAS METER EXISTING SANITARY SEWER EXISTING ELECTRIC STRUCTURES |
| ECB EVT (TR E | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING GAS METER EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING GAS METER EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING GAS METER EXISTING ELECTRIC STRUCTURES EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING SANITARY SEWER EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED WATER VALVE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING GAS METER EXISTING ELECTRIC STRUCTURES EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED WATER VALVE PROPOSED LIGHT POLE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING SANITARY SEWER EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED WATER VALVE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING SANITARY SEWER EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED WATER VALVE PROPOSED LIGHT POLE PROPOSED SEWER MANHOLE PROPOSED SEWER MANHOLE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING GAS METER EXISTING ELECTRIC STRUCTURES EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED LIGHT POLE PROPOSED LIGHT POLE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING PAD MOUNTED TRANSFORMER EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING SANITARY SEWER EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED WATER VALVE PROPOSED LIGHT POLE PROPOSED SEWER MANHOLE PROPOSED SEWER MANHOLE |
| | EXISTING FIBER OPTIC STRUCTURES EXISTING LIGHT POLE EXISTING LIGHT POLE EXISTING STORM SEWER MANHOLE EXISTING FIRE HYDRANT EXISTING GAS METER EXISTING GAS METER EXISTING ELECTRIC STRUCTURES EXISTING ELECTRIC STRUCTURES EXISTING WATER VALVE ADA PARKING SYMBOL PROPOSED SIGN PROPOSED FIRE HYDRANT PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED LIGHT POLE PROPOSED LIGHT POLE PROPOSED SEWER MANHOLE PROPOSED SEWER MANHOLE |

<u>CAUTION - NOTICE TO CONTRACTOR</u>


1. ALL UTILITY LOCATIONS SHOWN ARE BASED ON MAPS PROVIDED BY THE APPROPRIATE UTILITY COMPANY AND FIELD SURFACE EVIDENCE AT THE TIME OF SURVEY AND IS TO BE CONSIDERED AN APPROXIMATE LOCATION ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE LOCATION OF ALL UTILITIES, PUBLIC OR PRIVATE, WHETHER SHOWN ON THE PLANS OR NOT, PRIOR TO CONSTRUCTION. REPORT ANY DISCREPANCIES TO THE Know what's $b e | \circ w$. ENGINEER PRIOR TO CONSTRUCTION.



Call before you dig.

2. WHERE A PROPOSED UTILITY CROSSES AN EXISTING UTILITY, IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF SUCH EXISTING UTILITY, EITHER THROUGH POTHOLING OR ALTERNATIVE METHOD. REPORT INFORMATION TO THE ENGINEER PRIOR TO CONSTRUCTION.

PLANNING AND COMMUNITY DEVELOPMENT DIRECTOR:

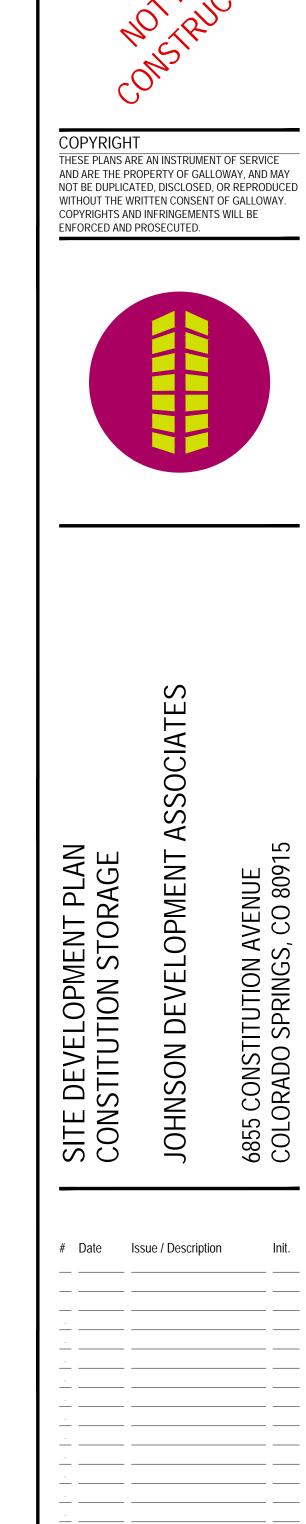

Ω

Init.

Galloway

1155 Kelly Johnson Blvd., Suite 305 Colorado Springs, CO 80920

719.900.7220 GallowayUS.com _____

| Project No: | JDA02 |
|-------------|-----------|
| Drawn By: | RWO |
| Checked By: | BAS |
| Date: | JUNE 2023 |
| | |

VEHICLE TRACKING PLAN

.2

COUNTY FILE NUMBER: PPR-2224 Sheet 3 of 14

Existing AM Peterson Rd & Constitution Ave

| | ≯ | + | 1 | 1 | Ļ | • | 1 | Ť | 1 | * | ţ | ~ |
|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
| Lane Group Flow (vph) | 116 | 438 | 99 | 179 | 826 | 177 | 142 | 251 | 77 | 91 | 588 | 249 |
| v/c Ratio | 0.29 | 0.35 | 0.15 | 0.31 | 0.63 | 0.25 | 0.55 | 0.29 | 0.16 | 0.23 | 0.74 | 0.58 |
| Control Delay | 16.0 | 29.6 | 2.2 | 15.7 | 33.6 | 4.6 | 33.4 | 36.9 | 0.9 | 25.8 | 49.3 | 29.4 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Delay | 16.0 | 29.6 | 2.2 | 15.7 | 33.6 | 4.6 | 33.4 | 36.9 | 0.9 | 25.8 | 49.3 | 29.4 |
| Queue Length 50th (ft) | 41 | 130 | 0 | 66 | 273 | 0 | 74 | 82 | 0 | 46 | 224 | 103 |
| Queue Length 95th (ft) | 80 | 175 | 17 | 118 | 342 | 46 | 113 | 115 | 2 | 77 | 271 | 179 |
| Internal Link Dist (ft) | | 691 | | | 661 | | | 589 | | | 420 | |
| Turn Bay Length (ft) | 250 | | | 250 | | | 230 | | 50 | 160 | | 50 |
| Base Capacity (vph) | 404 | 1253 | 648 | 576 | 1312 | 698 | 277 | 897 | 502 | 503 | 958 | 500 |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Reduced v/c Ratio | 0.29 | 0.35 | 0.15 | 0.31 | 0.63 | 0.25 | 0.51 | 0.28 | 0.15 | 0.18 | 0.61 | 0.50 |
| Intersection Summary | | | | | | | | | | | | |

Existing AM Peterson Rd & Constitution Ave

| | ۲ | - | 7 | 4 | + | * | 1 | 1 | 1 | 4 | ţ | ~ |
|--|--------------|------------------|------------------|------------------|------------------|---|-------------|------------------|------|--------------|------|------|
| Movement | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
| Lane Configurations | ٦ | †† | 1 | ٦ | - ++ | 1 | 7 | †† | 1 | ሻ | - ++ | 1 |
| Traffic Volume (veh/h) | 107 | 403 | 91 | 165 | 760 | 163 | 131 | 231 | 71 | 84 | 541 | 229 |
| Future Volume (veh/h) | 107 | 403 | 91 | 165 | 760 | 163 | 131 | 231 | 71 | 84 | 541 | 229 |
| Initial Q (Qb), veh | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ped-Bike Adj(A_pbT) | 1.00 | | 1.00 | 1.00 | | 1.00 | 1.00 | | 1.00 | 1.00 | | 1.00 |
| Parking Bus, Adj | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Work Zone On Approach | 4070 | No | 4070 | 4070 | No | 4070 | 4070 | No | 4070 | 4070 | No | 4070 |
| Adj Sat Flow, veh/h/ln | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 |
| Adj Flow Rate, veh/h | 116 | 438 | 0 | 179 | 826 | 0 | 142 | 251 | 0 | 91 | 588 | 0 |
| Peak Hour Factor | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| Percent Heavy Veh, % | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Cap, veh/h | 441 | 1630 0.46 | 0.00 | 624 | 1689 | 0.00 | 235 | 795 0.22 | 0.00 | 344 | 710 | 0.00 |
| Arrive On Green | 0.10 1781 | 0.46 3554 | | 0.11 | 0.48 | 0.00 | 0.08 | | | 0.06 1781 | 0.20 | |
| Sat Flow, veh/h | | | 1585 | 1781 | 3554 | 1585 | 1781 | 3554 | 1585 | | 3554 | 1585 |
| Grp Volume(v), veh/h | 116 | 438 | 0 | 179 | 826 | 0 | 142 | 251 | 0 | 91 | 588 | 0 |
| Grp Sat Flow(s),veh/h/ln | 1781 | 1777 | 1585 | 1781 | 1777 | 1585 | 1781 | 1777 | 1585 | 1781 | 1777 | 1585 |
| Q Serve(g_s), s | 3.7 | 9.1 | 0.0 | 5.7 | 19.1 | 0.0 | 7.5 | 7.1 | 0.0 | 4.8 | 19.0 | 0.0 |
| Cycle Q Clear(g_c), s | 3.7 | 9.1 | 0.0 | 5.7 | 19.1 | 0.0 | 7.5 | 7.1 | 0.0 | 4.8 | 19.0 | 0.0 |
| Prop In Lane | 1.00 441 | 1630 | 1.00 | 1.00 624 | 1689 | 1.00 | 1.00 235 | 795 | 1.00 | 1.00 344 | 710 | 1.00 |
| Lane Grp Cap(c), veh/h V/C Ratio(X) | 44 I 0.26 | 0.27 | | 0.29 | 0.49 | | 235 | 0.32 | | 0.26 | 0.83 | |
| Avail Cap(c_a), veh/h | 441 | 1630 | | 624 | 1689 | | 294 | 0.32 814 | | 521 | 962 | |
| HCM Platoon Ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Upstream Filter(I) | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 |
| Uniform Delay (d), s/veh | 14.2 | 20.1 | 0.00 | 12.7 | 21.5 | 0.00 | 35.5 | 38.9 | 0.00 | 35.2 | 46.0 | 0.00 |
| Incr Delay (d2), s/veh | 1.5 | 0.4 | 0.0 | 1.2 | 1.0 | 0.0 | 2.5 | 0.2 | 0.0 | 0.4 | 4.5 | 0.0 |
| Initial Q Delay(d3),s/veh | 0.0 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | 0.4 | 0.0 | 0.0 |
| %ile BackOfQ(50%),veh/ln | 1.6 | 3.7 | 0.0 | 2.3 | 7.7 | 0.0 | 3.4 | 3.1 | 0.0 | 2.1 | 8.8 | 0.0 |
| Unsig. Movement Delay, s/veh | | 0.1 | 0.0 | 2.0 | 1.1 | 0.0 | 0.4 | 0.1 | 0.0 | 2.1 | 0.0 | 0.0 |
| LnGrp Delay(d),s/veh | 15.7 | 20.5 | 0.0 | 13.9 | 22.5 | 0.0 | 38.0 | 39.1 | 0.0 | 35.6 | 50.6 | 0.0 |
| LnGrp LOS | В | C | 0.0 | B | C | 0.0 | D | D | 0.0 | D | D | 0.0 |
| Approach Vol, veh/h | | 554 | А | | 1005 | А | | 393 | А | | 679 | A |
| Approach Delay, s/veh | | 19.5 | | | 21.0 | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | 38.7 | | | 48.5 | 7. |
| Approach LOS | | B | | | C | | | D | | | D | |
| | 1 | | 2 | 1 | - | 6 | 7 | | | | _ | |
| Timer - Assigned Phs Phs Duration (G+Y+Rc), s | 11.1 | <u>2</u> 31.4 | <u>3</u> 18.0 | <u>4</u> 59.5 | <u>5</u> 14.0 | <u>6</u> 28.5 | 7 16.0 | <u>8</u> 61.5 | | | | |
| Change Period (Y+Rc), s | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | | | | |
| Max Green Setting (Gmax), s | 18.5 | 27.5 | 13.5 | 42.5 | 13.5 | 32.5 | 4.5 | 4.5 | | | | |
| Max Q Clear Time (g_c+I1), s | 6.8 | 9.1 | 7.7 | 42.5 | 9.5 | 21.0 | 5.7 | 21.1 | | | | |
| Green Ext Time (p_c), s | 0.0 | 1.4 | 0.2 | 2.8 | 0.1 | 21.0 | 0.1 | 5.5 | | | | |
| | | | | | | | | 5.0 | | | | |
| Intersection Summary | | | 20.4 | | | | | | | | | |
| HCM 6th Ctrl Delay | | | 30.4 | | | | | | | | | |
| HCM 6th LOS | | | С | | | | | | | | | |

Notes

Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.

Existing PM Peterson Rd & Constitution Ave

| Lane GroupEBLEBTEBRWBLWBTWBRNBLNBTNBRSBLSBTLane Group Flow (vph)254112718087882170236860121153308v/c Ratio0.730.760.240.440.740.260.550.870.220.710.36Control Delay35.533.84.523.839.94.829.852.25.144.738.8Queue Delay0.00.00.00.00.00.00.00.00.00.00.0Total Delay35.533.84.523.839.94.829.852.25.144.738.8Queue Length 50th (ft)1183844343160122330075104Queue Length 95th (ft)#24247047623944418641236#152146Internal Link Dist (ft)691661589420420Turn Bay Length (ft)25025023050160Base Capacity (vph)350148376319811886494411017552219880Starvation Cap Reductn0000000000000Spillback Cap Reductn0000000000000 <th></th> <th>٠</th> <th>→</th> <th>1</th> <th>4</th> <th>↓</th> <th>•</th> <th>1</th> <th>Ť</th> <th>1</th> <th>4</th> <th>Ļ</th> <th>~</th> | | ٠ | → | 1 | 4 | ↓ | • | 1 | Ť | 1 | 4 | Ļ | ~ |
|---|-------------------------|------|----------|------|------|------|------|------|------|------|------|------|------|
| v/c Ratio0.730.760.240.440.740.260.550.870.220.710.36Control Delay35.533.84.523.839.94.829.852.25.144.738.8Queue Delay0.00.00.00.00.00.00.00.00.00.00.0Total Delay35.533.84.523.839.94.829.852.25.144.738.8Queue Length 50th (ft)1183844343160122330075104Queue Length 95th (ft)#24247047623944418641236#152146Internal Link Dist (ft)691661589420Turn Bay Length (ft)25025023050160Base Capacity (vph)350148376319811886494411017552219880Starvation Cap Reductn00000000000Spillback Cap Reductn000000000000Storage Cap Reductn000000000000 | Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
| Control Delay35.533.84.523.839.94.829.852.25.144.738.8Queue Delay0.00.00.00.00.00.00.00.00.00.00.0Total Delay35.533.84.523.839.94.829.852.25.144.738.8Queue Length 50th (ft)1183844343160122330075104Queue Length 95th (ft)#24247047623944418641236#152146Internal Link Dist (ft)691661589420Turn Bay Length (ft)25025023050160Base Capacity (vph)350148376319811886494411017552219880Starvation Cap Reductn00000000000Storage Cap Reductn0000000000 | Lane Group Flow (vph) | 254 | 1127 | 180 | 87 | 882 | 170 | 236 | 860 | 121 | 153 | 308 | 162 |
| Queue Delay0.0 <td>v/c Ratio</td> <td>0.73</td> <td>0.76</td> <td>0.24</td> <td>0.44</td> <td>0.74</td> <td>0.26</td> <td>0.55</td> <td>0.87</td> <td>0.22</td> <td>0.71</td> <td>0.36</td> <td>0.31</td> | v/c Ratio | 0.73 | 0.76 | 0.24 | 0.44 | 0.74 | 0.26 | 0.55 | 0.87 | 0.22 | 0.71 | 0.36 | 0.31 |
| Total Delay 35.5 33.8 4.5 23.8 39.9 4.8 29.8 52.2 5.1 44.7 38.8 Queue Length 50th (ft) 118 384 4 34 316 0 122 330 0 75 104 Queue Length 95th (ft) #242 470 47 62 394 44 186 412 36 #152 146 Internal Link Dist (ft) 691 661 589 420 420 420 Turn Bay Length (ft) 250 250 230 50 160 420 Base Capacity (vph) 350 1483 763 198 1188 649 441 1017 552 219 880 Starvation Cap Reductn 0 0 0 0 0 0 0 0 0 0 0 Spillback Cap Reductn 0 </td <td>Control Delay</td> <td>35.5</td> <td>33.8</td> <td>4.5</td> <td>23.8</td> <td>39.9</td> <td>4.8</td> <td>29.8</td> <td>52.2</td> <td>5.1</td> <td>44.7</td> <td>38.8</td> <td>5.8</td> | Control Delay | 35.5 | 33.8 | 4.5 | 23.8 | 39.9 | 4.8 | 29.8 | 52.2 | 5.1 | 44.7 | 38.8 | 5.8 |
| Queue Length 50th (ft)1183844343160122330075104Queue Length 95th (ft)#24247047623944418641236#152146Internal Link Dist (ft)691661589420Turn Bay Length (ft)25025023050160Base Capacity (vph)350148376319811886494411017552219880Starvation Cap Reductn00000000000Spillback Cap Reductn00000000000Storage Cap Reductn0000000000 | Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Queue Length 95th (ft) #242 470 47 62 394 44 186 412 36 #152 146 Internal Link Dist (ft) 691 661 589 420 Turn Bay Length (ft) 250 230 50 160 Base Capacity (vph) 350 1483 763 198 1188 649 441 1017 552 219 880 Starvation Cap Reductn 0 | Total Delay | 35.5 | 33.8 | 4.5 | 23.8 | 39.9 | 4.8 | 29.8 | 52.2 | 5.1 | 44.7 | 38.8 | 5.8 |
| Internal Link Dist (ft) 691 661 589 420 Turn Bay Length (ft) 250 250 230 50 160 Base Capacity (vph) 350 1483 763 198 1188 649 441 1017 552 219 880 Starvation Cap Reductn 0 | Queue Length 50th (ft) | 118 | 384 | 4 | 34 | 316 | 0 | 122 | 330 | 0 | 75 | 104 | 0 |
| Turn Bay Length (ff)25025023050160Base Capacity (vph)350148376319811886494411017552219880Starvation Cap Reductn0000000000Spillback Cap Reductn0000000000Storage Cap Reductn000000000 | Queue Length 95th (ft) | #242 | 470 | 47 | 62 | 394 | 44 | 186 | 412 | 36 | #152 | 146 | 44 |
| Base Capacity (vph)350148376319811886494411017552219880Starvation Cap Reductn0000000000Spillback Cap Reductn0000000000Storage Cap Reductn000000000 | Internal Link Dist (ft) | | 691 | | | 661 | | | 589 | | | 420 | |
| Starvation Cap Reductn 0 | Turn Bay Length (ft) | 250 | | | 250 | | | 230 | | 50 | 160 | | 50 |
| Spillback Cap Reductn 0 | Base Capacity (vph) | 350 | 1483 | 763 | 198 | 1188 | 649 | 441 | 1017 | 552 | 219 | 880 | 526 |
| Storage Cap Reductn 0 | Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Reduced v/c Ratio | 0.73 | 0.76 | 0.24 | 0.44 | 0.74 | 0.26 | 0.54 | 0.85 | 0.22 | 0.70 | 0.35 | 0.31 |

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

Existing PM Peterson Rd & Constitution Ave

| | ٨ | - | 7 | • | + | * | 1 | 1 | 1 | 1 | Ŧ | 4 |
|---|-------------|--------------|---|--------------|--------------|---|--------------|--------------|---|-------------|-------------|------|
| Movement | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
| Lane Configurations | ሻ | ^ | 1 | ٦ | ^ | 1 | ሻ | †† | 1 | ٦ | ^ | 1 |
| Traffic Volume (veh/h) | 234 | 1037 | 166 | 80 | 811 | 156 | 217 | 791 | 111 | 141 | 283 | 149 |
| Future Volume (veh/h) | 234 | 1037 | 166 | 80 | 811 | 156 | 217 | 791 | 111 | 141 | 283 | 149 |
| Initial Q (Qb), veh | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ped-Bike Adj(A_pbT) | 1.00 | | 1.00 | 1.00 | | 1.00 | 1.00 | | 1.00 | 1.00 | | 1.00 |
| Parking Bus, Adj | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Work Zone On Approach | 1070 | No | 1070 | 1070 | No | 1070 | 1070 | No | 1070 | 1070 | No | 1070 |
| Adj Sat Flow, veh/h/ln | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 | 1870 |
| Adj Flow Rate, veh/h | 254 | 1127 | 0 | 87 | 882 | 0 | 236 | 860 | 0 | 153 | 308 | 0 |
| Peak Hour Factor | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| Percent Heavy Veh, % | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Cap, veh/h | 401 | 1586 | 0.00 | 251 | 1290 | 0.00 | 438 | 955 | 0.00 | 227 | 834 | 0.00 |
| Arrive On Green | 0.14 | 0.45 | 0.00 | 0.05 | 0.36 | 0.00 | 0.11 | 0.27 | 0.00 | 0.08 | 0.23 | 0.00 |
| Sat Flow, veh/h | 1781 | 3554 | 1585 | 1781 | 3554 | 1585 | 1781 | 3554 | 1585 | 1781 | 3554 | 1585 |
| Grp Volume(v), veh/h | 254 | 1127 | 0 | 87 | 882 | 0 | 236 | 860 | 0 | 153 | 308 | 0 |
| Grp Sat Flow(s),veh/h/ln | 1781 | 1777 | 1585 | 1781 | 1777 | 1585 | 1781 | 1777 | 1585 | 1781 | 1777 | 1585 |
| Q Serve(g_s), s | 9.6 | 30.9 | 0.0 | 3.6 | 25.2 | 0.0 | 11.7 | 28.0 | 0.0 | 7.7 | 8.7 | 0.0 |
| Cycle Q Clear(g_c), s | 9.6 | 30.9 | 0.0 | 3.6 | 25.2 | 0.0 | 11.7 | 28.0 | 0.0 | 7.7 | 8.7 | 0.0 |
| Prop In Lane | 1.00 | 1500 | 1.00 | 1.00 | 1000 | 1.00 | 1.00 | 055 | 1.00 | 1.00 227 | 024 | 1.00 |
| Lane Grp Cap(c), veh/h | 401 | 1586 0.71 | | 251 0.35 | 1290 | | 438 | 955 0.90 | | 0.68 | 834 0.37 | |
| V/C Ratio(X) | 0.63 401 | 1586 | | 251 | 0.68 1290 | | 0.54 464 | 1022 | | 242 | 880 | |
| Avail Cap(c_a), veh/h HCM Platoon Ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1290 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Upstream Filter(I) | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 |
| Uniform Delay (d), s/veh | 21.5 | 26.9 | 0.00 | 23.6 | 32.4 | 0.00 | 28.6 | 42.3 | 0.00 | 33.8 | 38.5 | 0.00 |
| Incr Delay (d2), s/veh | 7.4 | 20.3 | 0.0 | 3.8 | 3.0 | 0.0 | 1.1 | 10.4 | 0.0 | 6.7 | 0.3 | 0.0 |
| Initial Q Delay(d3),s/veh | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| %ile BackOfQ(50%),veh/ln | 4.5 | 12.9 | 0.0 | 1.7 | 10.9 | 0.0 | 5.1 | 13.4 | 0.0 | 3.7 | 3.8 | 0.0 |
| Unsig. Movement Delay, s/veh | | 12.5 | 0.0 | 1.7 | 10.5 | 0.0 | 0.1 | 10.4 | 0.0 | 0.7 | 0.0 | 0.0 |
| LnGrp Delay(d),s/veh | 28.9 | 29.7 | 0.0 | 27.4 | 35.3 | 0.0 | 29.7 | 52.7 | 0.0 | 40.5 | 38.8 | 0.0 |
| LnGrp LOS | 20.0 C | C | 0.0 | C | D | 0.0 | C | D | 0.0 | D | D | 0.0 |
| Approach Vol, veh/h | <u> </u> | 1381 | А | <u> </u> | 969 | А | | 1096 | А | | 461 | А |
| Approach Delay, s/veh | | 29.5 | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | 34.6 | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | 47.8 | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | 39.3 | 7 |
| Approach LOS | | C | | | C | | | D | | | D | |
| •• | 4 | | 2 | 4 | | 0 | 7 | | | | 2 | |
| Timer - Assigned Phs | 14.0 | 2 | 3 | <u> </u> | 10.2 | 6 | 7 | 8 | | | | |
| Phs Duration (G+Y+Rc), s | 14.2 4.5 | 36.8 | 11.0 | 58.1 | 18.3 | 32.7 | 21.0 | 48.1 | | | | |
| Change Period (Y+Rc), s | | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | | | | |
| Max Green Setting (Gmax), s Max Q Clear Time (g_c+I1), s | 10.7 9.7 | 34.5 30.0 | 6.5 5.6 | 50.3 32.9 | 15.5 13.7 | 29.7 10.7 | 16.5 11.6 | 40.3 27.2 | | | | |
| Green Ext Time (p_c), s | 9.7 0.0 | 30.0 | 0.0 | 32.9 7.1 | 0.1 | 10.7 | 0.3 | 4.6 | | | | |
| , , , , , , , , , , , , , , , , , , , | 0.0 | 2.2 | 0.0 | 1.1 | 0.1 | 1.0 | 0.5 | 4.0 | | | | |
| Intersection Summary | | | | | | | | | | | | |
| HCM 6th Ctrl Delay | | | 37.1 | | | | | | | | | |
| HCM 6th LOS | | | D | | | | | | | | | |
| | | | | | | | | | | | | |

Notes

Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.