SOLACE APARTMENTS FILING NO. 2 A PORTION OF SECTION 7, TOWNSHIP 14 SOUTH, RANGE 65 SEST OF THE P.M.


Sheet List Table		
Sheet Number	Sheet Title	
C-001	COVER SHEET	
C-002	GENERAL NOTES	
C-101	OVERALL SITE PLAN	
C-102	HORIZONTAL CONTROL PLAN	
C-103	HORIZONTAL CONTROL PLAN	
C-104	HORIZONTAL CONTROL PLAN	
C-105	HORIZONTAL CONTROL PLAN	
C-300	OVERALL GRADING PLAN	
C-301	DETAILED GRADING PLAN	
C-302	DETAILED GRADING PLAN	
C-303	DETAILED GRADING PLAN	
C-304	DETAILED GRADING PLAN	
C-400	OVERALL STORM PLAN	
C-401	DETAILED STORM PLAN	
C-402	DETAILED STORM PLAN	
C-500	CONSTRUCTION DETAILS	
C-600	UTILITY PLAN COVER SHEET	
C-601	UTILITY GENERAL NOTES	
C-602	UTILITY GENERAL NOTES	
C-603	SANITARY SERVICE PLAN	
C-604	WATER SERVICE PLAN	
L-701	LANDSCAPE SHEET INDEX	
L-702	LANDSCAPE PLAN 1	
L-703	LANDSCAPE PLAN 2	
L-704	LANDSCAPE PLAN 3	
L-705	LANDSCAPE PLAN 4	
L-706	LANDSCAPE NOTES	
L-707	LANDSCAPE DETAILS	
L-801	IRRIGATION SHEET INDEX	
L-802	IRRIGATION	
L-803	IRRIGATION	
L-804	IRRIGATION	
L-805	IRRIGATION	
L-806	IRRIGATION NOTES	
L-806	IRRIGATION DETAILS	

BENCHMARK

FIMS MONUMENT F81, BEING MONUMENTED BY A 3-1/4" ALUMINUM CAP IN RANGE BOX WITH NO TOP, LOCATED 900 FEET EAST OF THE INTERSECTION OF E. PLATTE AVENUE AND VALLEY STREET, APPROXIMATELY 80 FEET NORTH OF THE CENTERLINE OF E PLATTE AVENUE. SAID MONUMENT HAVING A PUBLISHED ELEVATION OF 6275.86 FEET, NAVD88

EL PASO COUNTY, COLORADO

CONSTRUCTION DOCUMENTS AND GRADING AND EROSION CONTROL PLAN

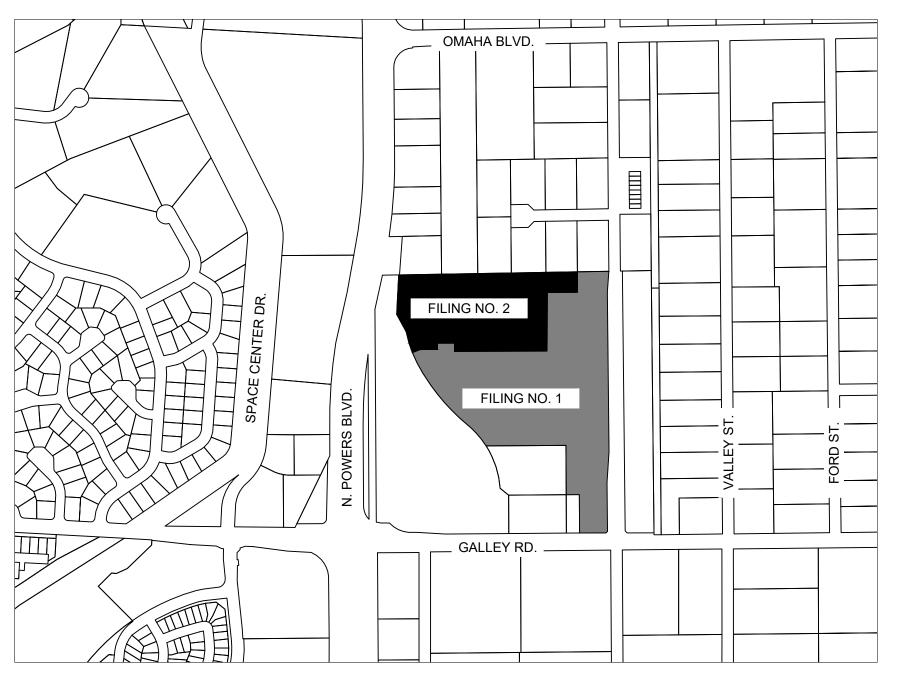

VICINITY MAP 1" = 500'

CONTACTS

OWNER CS POWERS & GALLEY LLC 510 S NEIL ST CHAMPAIGN, IL 61820 PHONE: (719) 216-2577

CIVIL ENGINEER: KIMLEY-HORN AND ASSOCIATES 2 N. NEVADA AVENUE SUITE 900 COLORADO SPRINGS, CO 80903 CONTACT: ERIC GUNDERSON PHONE: (719) 453-0182

I. THE OWNER/DEVELOPER HAVE READ AND WILL COMPLY WITH THE REQUIREMENTS OF THE GRADING AND EROSION CONTROL PLAN AND ALL OF THE REQUIREMENTS SPECIFIED IN THESE DETAILED PLANS AND SPECIFICATIONS.



THESE DETAILED PLANS AND SPECIFICATIONS WERE PREPARED UNDER MY DIRECTION AND SUPERVISION. SAID PLANS AND SPECIFICATIONS HAVE BEEN PREPARED ACCORDING TO THE CRITERIA ESTABLISHED BY THE COUNTY FOR DETAILED ROADWAY, DRAINAGE, GRADING AND EROSION CONTROL PLANS AND SPECIFICATIONS AND SAID PLANS AND SPECIFICATIONS ARE IN CONFORMITY WITH THE APPLICABLE MASTER DRAINAGE PLANS AND MASTER TRANSPORTATION PLANS. SAID PLANS AND SPECIFICATIONS MEET THE PURPOSES FOR WHICH THE PARTICULAR ROADWAY AND DRAINAGE FACILITIES ARE DESIGNED AND ARE CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I ACCEPT RESPONSIBILITY FOR ANY LIABILITY CAUSED BY ANY NEGLIGENT ACTS, ERRORS OR OMISSIONS ON MY PART IN PREPARATION OF THE DETAILED PLANS AND SPECIFICATIONS



EL PASO COUNTY REVIEW STATEMENT

AMENDED.

IN ACCORDANCE WITH ECM SECTION 1.12, THESE CONSTRUCTION DOCUMENTS WILL BE VALID FOR CONSTRUCTION FOR A PERIOD OF 2 YEARS FROM THE DATE SIGNED BY THE EL PASO COUNTY ENGINEER. IF CONSTRUCTION HAS NOT STARTED WITHIN THOSE 2 YEARS, THE PLANS WILL NEED TO BE RESUBMITTED FOR APPROVAL, INCLUDING PAYMENT OF REVIEW FEES AT THE PLANNING AND COMMUNITY DEVELOPMENT DIRECTORS DISCRETION.

JOSHUA PALMER COUNTY ENGINE

GENERAL NOTE:

THE PARTIES RESPONSIBLE FOR THIS PLAN HAVE FAMILIARIZED THEMSELVES WITH ALL CURRENT ACCESSIBILITY CRITERIA AND SPECIFICATIONS AND THE PROPOSED PLAN REFLECTS ALL THE SITE ELEMENTS REQUIRED BY THE APPLICABLE ADA DESIGN STANDARDS AND GUIDELINES AS PUBLISHED BY THE UNITED STATES DEPARTMENT OF JUST. APPROVAL OF THIS PLAN BY EL PASO COUNTY DOES NOT ASSURE COMPLIANCE WITH THE ADA OR ANY REGULATIONS OR GUIDELINES ENACTED OR PROMULGATED UNDER OR WITH RESPECT TO SUCH LAWS.

CONTACT: DANE OLMSTEAD

SURVEYOR: JR ENGINEERING, LLC 5475 TECH CENTER DRIVE STE 235 COLORADO SPRINGS, CO 80919 TEL: 719-593-2593 CONTACT: DANIEL CLARK, P.E.

EL PASO COUNTY: EL PASO COUNTY PCD DEPARTMENT 2880 INTERNATIONAL CIRCLE, SUITE 110 COLORADO SPRINGS, CO 80910 PHONE: (719) 520-6300

DEVELOPER'S SIGNATURE BLOCK

Olmstead	
٨D	

7/11/2023 DATE

ENGINEER'S SIGNATURE BLOCK

lundo an		
underter	7/10/23	
ON. PE - KIMLEY-HORN AND ASSOCIATES. INC.	DATE	

COUNTY PLAN REVIEW IS PROVIDED ONLY FOR GENERAL CONFORMANCE WITH COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE FOR THE ACCURACY AND ADEQUACY OF THE DESIGN DIMENSIONS AND/OR ELEVATIONS WHICH SHALL BE CONFIRMED AT THE JOB SITE. THE COUNTY THROUGH THE APPROVAL OF THIS DOCUMENT ASSUMES NO RESPONSIBILITY FOR COMPLETENESS AND/OR ACCURACY OF THIS DOCUMENT.


FILED IN ACCORDANCE WITH THE REQUIREMENTS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE, DRAINAGE CRITERIA MANUAL VOLUMES 1 AND 2, AND ENGINEERING CRITERIA MANUAL, AS

R, P.E.	
EER / ECM ADMINISTRATOR	



DATE

Know what's **below**.

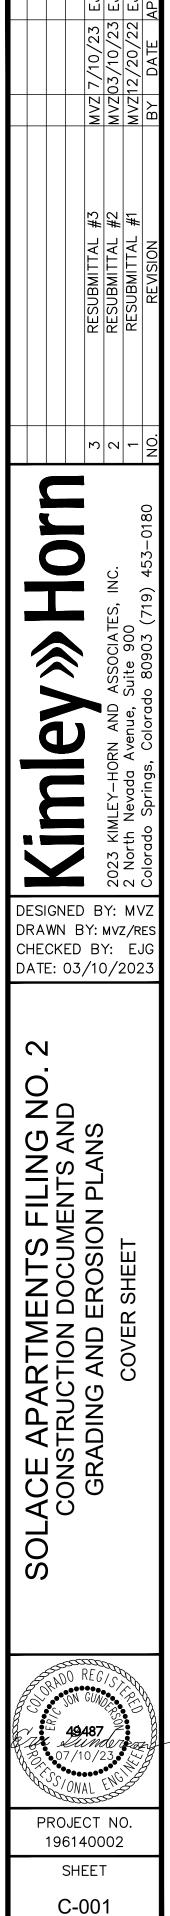

PCD FILE NO. SF-2232

Call before you dig.

SOLACE APARTMENTS FILING NO. 2 A PORTION OF SECTION 7, TOWNSHIP 14 SOUTH, RANGE 65 SEST OF THE P.M.

STANDARD NOTES FOR EL PASO COUNTY GRADING AND **EROSION CONTROL PLANS:**

- STORMWATER DISCHARGES FROM CONSTRUCTION SITES SHALL NOT CAUSE OR THREATEN TO CAUSE POLLUTION. CONTAMINATION, OR DEGRADATION OF STATE WATERS. ALL WORK AND EARTH DISTURBANCE SHALL BE DONE IN A MANNER THAT MINIMIZES POLLUTION OF ANY ON-SITE OR OFF SITE WATERS, INCLUDING WETLANDS.
- 2. NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS TO REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING.
- A SEPARATE STORMWATER MANAGEMENT PLAN (SMWP) FOR THIS PROJECT SHALL BE COMPLETED AND AN EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP) ISSUED PRIOR TO COMMENCING CONSTRUCTION. MANAGEMENT OF THE SWMP DURING CONSTRUCTION IS THE RESPONSIBILITY OF THE DESIGNATED QUALIFIED STORMWATER MANAGER OR CERTIFIED EROSION CONTROL INSPECTOR. THE SWMP SHALL BE LOCATED ON SITE AT ALL TIMES DURING CONSTRUCTION AND SHALL BE KEPT UP TO DATE WITH WORK PROGRESS AND CHANGES IN THE FIFI D
- ONCE THE ESQCP HAS BEEN APPROVED AND A "NOTICE TO PROCEED" HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT CONTROL MEASURES AS INDICATED ON THE APPROVED GEC. A PRECONSTRUCTION MEETING BETWEEN THE CONTRACTOR, ENGINEER, AND EL PASO COUNTY WILL BE HELD PRIOR TO ANY CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE APPLICANT TO COORDINATE THE MEETING TIME AND PLACE WITH COUNTY STAFF.
- CONTROL MEASURES MUST BE INSTALLED PRIOR TO COMMENCEMENT OF ACTIVITIES THAT COULD CONTRIBUTE POLLUTANTS TO STORMWATER. CONTROL MEASURES FOR ALL SLOPES, CHANNELS, DITCHES, AND DISTURBED LAND AREAS SHALL BE INSTALLED IMMEDIATELY UPON COMPLETION OF THE DISTURBANCE.
- ALL TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES SHALL BE MAINTAINED AND REMAIN IN EFFECTIVE OPERATING CONDITION UNTIL PERMANENT SOIL EROSION CONTROL MEASURES ARE IMPLEMENTED AND FINAL STABILIZATION IS ESTABLISHED. ALL PERSONS ENGAGED IN LAND DISTURBANCE ACTIVITIES SHALL ASSESS THE ADEQUACY OF CONTROL MEASURES AT THE SITE AND IDENTIFY IF CHANGES TO THOSE CONTROL MEASURES ARE NEEDED TO ENSURE THE CONTINUED EFFECTIVE PERFORMANCE OF THE CONTROL MEASURES. ALL CHANGES TO TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES MUST BE INCORPORATED INTO THE STORMWATER MANAGEMENT PLAN.
- TEMPORARY STABILIZATION SHALL BE IMPLEMENTED ON DISTURBED AREAS AND STOCKPILES WHERE GROUND DISTURBING CONSTRUCTION ACTIVITY HAS PERMANENTLY CEASED OR TEMPORARILY CEASED FOR LONGER THAN 14 DAYS.
- FINAL STABILIZATION MUST BE IMPLEMENTED AT ALL APPLICABLE CONSTRUCTION SITES. FINAL STABILIZATION IS ACHIEVED WHEN ALL GROUND DISTURBING ACTIVITIES ARE COMPLETE AND ALL DISTURBED AREAS EITHER HAVE A UNIFORM VEGETATIVE COVER WITH INDIVIDUAL PLAN DENSITY OF 70 PERCENT OF PRE-DISTURBANCE LEVELS ESTABLISHED OR EQUIVALENT PERMANENT ALTERNATIVE STABILIZATION METHOD IS IMPLEMENTED. ALL TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES SHALL BE REMOVED UPON FINAL STABILIZATION AND BEFORE PERMIT CLOSURE.
- ALL PERMANENT STORMWATER MANAGEMENT FACILITIES SHALL BE INSTALLED AS DESIGNED IN THE APPROVED PLANS. ANY PROPOSED CHANGES THAT EFFECT THE DESIGN OR FUNCTION OF PERMANENT STORMWATER MANAGEMENT STRUCTURES MUST BE APPROVED BY THE ECM ADMINISTRATOR PRIOR TO IMPLEMENTATION.
- 10. EARTH DISTURBANCES SHALL BE CONDUCTED IN SUCH A MANNER SO AS TO EFFECTIVELY MINIMIZE ACCELERATED SOIL EROSION AND RESULTING SEDIMENTATION. ALL DISTURBANCES SHALL BE DESIGNED, CONSTRUCTED, AND COMPLETED SO THAT THE EXPOSED AREA OF ANY DISTURBED LAND SHALL BE LIMITED TO THE SHORTEST PRACTICAL PERIOD OF TIME. PRE-EXISTING VEGETATION SHALL BE PROTECTED AND MAINTAINED WITHIN 50 HORIZONTAL FEET OF A WATERS OF THE STATE, UNLESS SHOWN TO BE INFEASIBLE AND SPECIFICALLY REQUESTED AND APPROVED.
- COMPACTION OF SOIL MUST BE PREVENTED IN AREAS DESIGNATED FOR INFILTRATION CONTROL MEASURES OR WHERE FINAL STABILIZATION WILL BE ACHIEVED BY VEGETATIVE COVER. AREAS DESIGNATED FOR INFILTRATION CONTROL SHALL ALSO BE PROTECTED FROM SEDIMENTATION DURING CONSTRUCTION UNTIL FINAL STABILIZATION IS ACHIEVED. IF COMPACTION PREVENTION IS NOT FEASIBLE DUE TO SITE CONSTRAINTS, ALL AREAS DESIGNATED FOR INFILTRATION AND VEGETATION CONTROL MEASURES MUST BE LOOSENED PRIOR TO INSTALLATION OF THE CONTROL MEASURE(S).
- 12. ANY TEMPORARY OR PERMANENT FACILITY DESIGNED AND CONSTRUCTED FOR THE CONVEYANCE OF STORMWATER AROUND, THROUGH, OR FROM THE EARTH DISTURBANCE AREA SHALL BE A STABILIZED CONVEYANCE DESIGNED TO MINIMIZE EROSION AND THE DISCHARGE OF SEDIMENT OFF SITE.
- 13. CONCRETE WASH WATER SHALL BE CONTAINED AND DISPOSED OF IN ACCORDANCE WITH THE SWMP. NO WASH WATER SHALL BE DISCHARGED TO OR ALLOWED TO ENTER STATE WATERS, INCLUDING ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR FACILITIES. CONCRETE WASHOUT SHALL NOT BE LOCATED IN AN AREA WHERE SHALLOW GROUNDWATER MAY BE PRESENT, OR WITHIN 50 FEET OF A SURFACE WATER BODY, CREEK, OR STREAM.
- 14. DURING DEWATERING OPERATIONS OF UNCONTAMINATED GROUND WATER MAY BE DISCHARGED ON SITE, BUT SHALL NOT LEAVE THE SITE IN THE FORM OF SURFACE RUNOFF UNLESS AN APPROVED STATE DEWATERING PERMIT IS IN PLACE.
- 15. EROSION CONTROL BLANKETING OR OTHER PROTECTIVE COVERING SHALL BE USED ON SLOPES STEEPER THAN 3:1.
- 16. CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL WASTES FROM THE COSNTRUCTION SITE FOR DISPOSAL IN ACCORDANCE WITH LOCAL AND STATE REGULATORY REQUIREMENTS. NO CONSTRUCTION DEBRIS, TREE SLASH, BUILDING MATERIAL WASTES OR UNUSED BUILDING MATERIALS SHALL BE BURIED, DUMPED, OR DISCHARGED AT THE SITE.
- 17. WASTE MATERIALS SHALL NOT BE TEMPORARILY PLACED OR STORED IN THE STREET, ALLEY, OR OTHER PUBLIC WAY, UNLESS IN ACCORDANCE WITH AN APPROVED TRAFFIC CONTROL PLAN. CONTROL MEASURES MAY BE REQUIRED BY EL PASO COUNTY ENGINEERING IF DEEMED NECESSARY, BASED ON SPECIFIC CONDITIONS AND CIRCUMSTANCES.

18. TRACKING OF SOILS AND CONSTRUCTION DEBRIS OFF-SITE SHALL BE MINIMIZED. MATERIALS TRACKED OFF-SITE SHALL BE CLEANED UP AND PROPERLY DISPOSED OF IMMEDIATELY.

19. THE OWNER/DEVELOPER SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL CONSTRUCTION DEBRIS, DIRT, TRASH, ROCK, SEDIMENT, SOIL, AND SAND THAT MAY ACCUMULATE IN ROADS, STORM DRAINS AND OTHER DRAINAGE CONVEYANCE SYSTEMS AND STORMWATER APPURTENANCES AS A RESULT OF SITE DEVELOPMENT.

20. THE QUANTITY OF MATERIALS STORED ON THE PROJECT SITE SHALL BE LIMITED, AS MUCH AS PRACTICAL, TO THAT QUANTITY REQUIRED TO PERFORM THE WORK IN AN ORDERLY SEQUENCE. ALL MATERIALS STORED ON-SITE SHALL BE STORED IN A NEAT. ORDERLY MANNER. IN THEIR ORIGINAL CONTAINERS. WITH ORIGINAL MANUFACTURER'S LABELS.

21. NO CHEMICAL(S) HAVING THE POTENTIAL TO BE RELEASED IN STORMWATER ARE TO BE STORED OR USED ONSITE UNLESS PERMISSION FOR THE USE OF SUCH CHEMICAL(S) IS GRANTED IN WRITING BY THE ECM ADMINISTRATOR. IN GRANTING APPROVAL FOR THE USE OF SUCH CHEMICAL(S), SPECIAL CONDITIONS AND MONITORING MAY BE REQUIRED.

22. BULK STORAGE OF PETROLEUM PRODUCTS OR OTHER ALLOWED LIQUID CHEMICALS IN EXCESS OF 55 GALLONS SHALL REQUIRE ADEQUATE SECONDARY CONTAINMENT PROTECTION TO CONTAIN ALL SPILLS ONSITE AND TO PREVENT ANY SPILLED MATERIALS FROM ENTERING STATE WATERS, ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR FACILITIES.

28. THE SOILS REPORT FOR THIS SITE HAS BEEN PREPARED BY CTL THOMPSON, DATED 01/15/2020 AND SHALL BE CONSIDERED A PART OF THESE PLANS. 29. AT LEAST TEN (10) DAYS PRIOR TO THE ANTICIPATED START OF CONSTRUCTION, FOR PROJECTS THAT WILL DISTURB ONE (1) ACRE OR MORE, THE OWNER OR OPERATOR OF CONSTRUCTION ACTIVITY SHALL SUBMIT A PERMIT APPLICATION FOR STORMWATER DISCHARGE TO THE COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT, WATER QUALITY DIVISION. THE APPLICATION CONTAINS CERTIFICATION OF COMPLETION OF A STORMWATER MANAGEMENT PLAN (SWMP), OF WHICH THIS GRADING AND EROSION CONTROL PLAN MAY BE A PART. FOR INFORMATION OR APPLICATION MATERIALS CONTACT:

WQCD – PERMITS

STANDARD NOTES FOR EL PASO COUNTY CONSTRUCTION PLANS

1. ALL DRAINAGE AND ROADWAY CONSTRUCTION SHALL MEET THE STANDARDS AND SPECIFICATIONS OF THE CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2, AND THE EL PASO COUNTY ENGINEERING CRITERIA MANUAL.

2. CONTRACTOR SHALL BE RESPONSIBLE FOR THE NOTIFICATION AND FIELD NOTIFICATION OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THE PLANS OR NOT, BEFORE BEGINNING CONSTRUCTION. LOCATION OF EXISTING UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. CALL 811 TO CONTACT THE UTILITY NOTIFICATION CENTER OF COLORADO (UNCC).

CONSTRUCTION

d. CDOT M & S STANDARDS

4. NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS FROM REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING. ANY MODIFICATIONS NECESSARY TO MEET CRITERIA AFTER-THE-FACT WILL BE ENTIRELY THE DEVELOPER'S RESPONSIBILITY TO RECTIFY.

5. IT IS THE DESIGN ENGINEER'S RESPONSIBILITY TO ACCURATELY SHOW EXISTING CONDITIONS, BOTH ONSITE AND OFFSITE, ON THE CONSTRUCTION PLANS. ANY MODIFICATIONS NECESSARY DUE TO CONFLICTS, OMISSIONS, OR CHANGED CONDITIONS WILL BE ENTIRELY THE DEVELOPER'S RESPONSIBILITY TO RECTIFY.

7. IT IS THE CONTRACTOR'S RESPONSIBILITY TO UNDERSTAND THE REQUIREMENTS OF ALL JURISDICTIONAL AGENCIES AND TO OBTAIN ALL REQUIRED PERMITS, INCLUDING BUT NOT LIMITED TO EL PASO COUNTY EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP), REGIONAL BUILDING FLOODPLAIN DEVELOPMENT PERMIT, U.S. ARMY CORPS OF ENGINEERS-ISSUED 401 AND/OR 404 PERMITS, AND COUNTY AND STATE FUGITIVE DUST PERMITS.

EL PASO COUNTY, COLORADO CONSTRUCTION DOCUMENTS

23. NO PERSON SHALL CAUSE THE IMPEDIMENT OF STORMWATER FLOW IN THE CURB AND GUTTER OR DITCH EXCEPT WITH APPROVED SEDIMENT CONTROL MEASURES.

24. OWNER/DEVELOPER AND THEIR AGENTS SHALL COMPLY WITH THE "COLORADO WATER QUALITY

CONTROL ACT" (TITLE 25, ARTICLE 8, CRS), AND THE "CLEAN WATER ACT" (33 USC 1344), IN ADDITION TO THE REQUIREMENTS OF THE LAND DEVELOPMENT CODE, DCM VOLUME II AND THE ECM APPENDIX I. ALL APPROPRIATE PERMITS MUST BE OBTAINED BY THE CONTRACTOR PRIOR TO CONSTRUCTION

(1041, NPDES, FLOODPLAIN, 404, FUGITIVE DUST, ETC.). IN THE EVENT OF CONFLICTS BETWEEN THESE REQUIREMENTS AND OTHER LAWS, RULES, OR REGULATIONS OF OTHER FEDERAL, STATE, LOCAL OR COUNTY AGENCIES, THE MOST RESTRICTIVE LAWS, RULES, OR REGULATIONS SHALL APPLY.

25. ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE AT APPROVED CONSTRUCTION ACCESS POINTS. 26. PRIOR TO CONSTRUCTION THE PERMITEE SHALL VERIFY THE LOCATION OF EXISTING UTILITIES.

27. A WATER SOURCE SHALL BE AVAILABLE ON SITE DURING EARTHWORK OPERATIONS AND SHALL BE UTILIZED AS REQUIRED TO MINIMIZE DUST FROM EARTHWORK EQUIPMENT AND WIND.

COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT WATER QUALITY CONTROL DIVISION

4300 CHERRY CREEK DRIVE SOUTH

DENVER, CO 80246-1530

ATTN: PERMITS UNIT

3. CONTRACTOR SHALL KEEP A COPY OF THESE APPROVED PLANS, THE GRADING AND EROSION CONTROL PLAN, THE STORMWATER MANAGEMENT PLAN (SWMP), THE SOILS AND GEOTECHNICAL REPORT, AND THE APPROPRIATE DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS AT THE JOB SITE AT ALL TIMES, INCLUDING THE FOLLOWING: a. EL PASO COUNTY ENGINEERING CRITERIA MANUAL (ECM)

b. CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2

c. COLORADO DEPARTMENT OF TRANSPORTATION (CDOT) STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE

6. CONTRACTOR SHALL SCHEDULE A PRE-CONSTRUCTION MEETING WITH EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT (PCD) - INSPECTIONS, PRIOR TO STARTING CONSTRUCTION.


- OR INCONSISTENCIES.
- ALL STORM DRAIN PIPE SHALL BE CLASS III RCP UNLESS OTHERWISE NOTED AND APPROVED BY PCD. 9
- 10. CONTRACTOR SHALL COORDINATE GEOTECHNICAL TESTING PER ECM STANDARDS. PAVEMENT DESIGN SHALL BE APPROVED BY EL PASO COUNTY PCD PRIOR TO PLACEMENT OF CURB AND GUTTER AND PAVEMENT
- 11. ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE AT APPROVED CONSTRUCTION ACCESS POINTS.
- GREATER THAN 18 INCHES ABOVE FLOWLINE ARE NOT ALLOWED WITHIN SIGHT TRIANGLES.
- SIGNING AND STRIPING NOTES WILL BE PROVIDED.]
- 14. CONTRACTOR SHALL OBTAIN ANY PERMITS REQUIRED BY EL PASO COUNTY DPW, INCLUDING WORK WITHIN THE RIGHT-OF-WAY AND SPECIAL TRANSPORT PERMITS.
- 15. THE LIMITS OF CONSTRUCTION SHALL REMAIN WITHIN THE PROPERTY LINE UNLESS OTHERWISE NOTED. THE PROPERTY OWNER(S) PRIOR TO ANY OFF-SITE DISTURBANCE, GRADING, OR CONSTRUCTION

CONTRACTOR SHALL NOT DEVIATE FROM THE PLANS WITHOUT FIRST OBTAINING WRITTEN APPROVAL FROM THE DESIGN ENGINEER AND PCD. CONTRACTOR SHALL NOTIFY THE DESIGN ENGINEER IMMEDIATELY UPON DISCOVERY OF ANY ERRORS


12. SIGHT VISIBILITY TRIANGLES AS IDENTIFIED IN THE PLANS SHALL BE PROVIDED AT ALL INTERSECTIONS. OBSTRUCTIONS


13. SIGNING AND STRIPING SHALL COMPLY WITH EL PASO COUNTY DPW AND MUTCD CRITERIA. [IF APPLICABLE, ADDITIONAL

OWNER/DEVELOPER SHALL OBTAIN WRITTEN PERMISSION AND EASEMENTS, WHERE REQUIRED, FROM ADJOINING

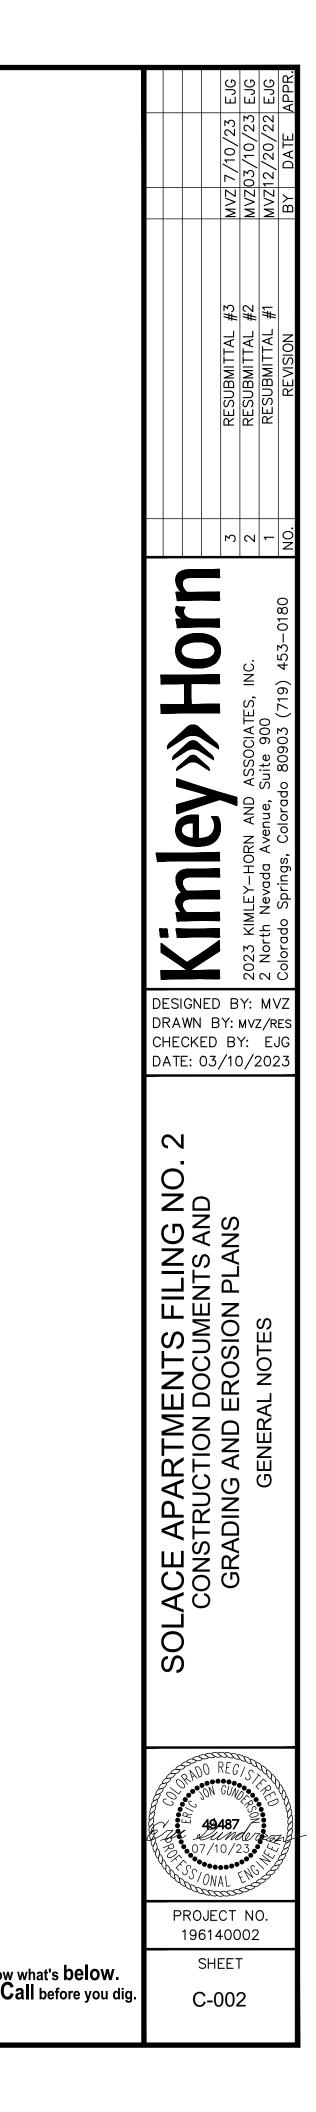



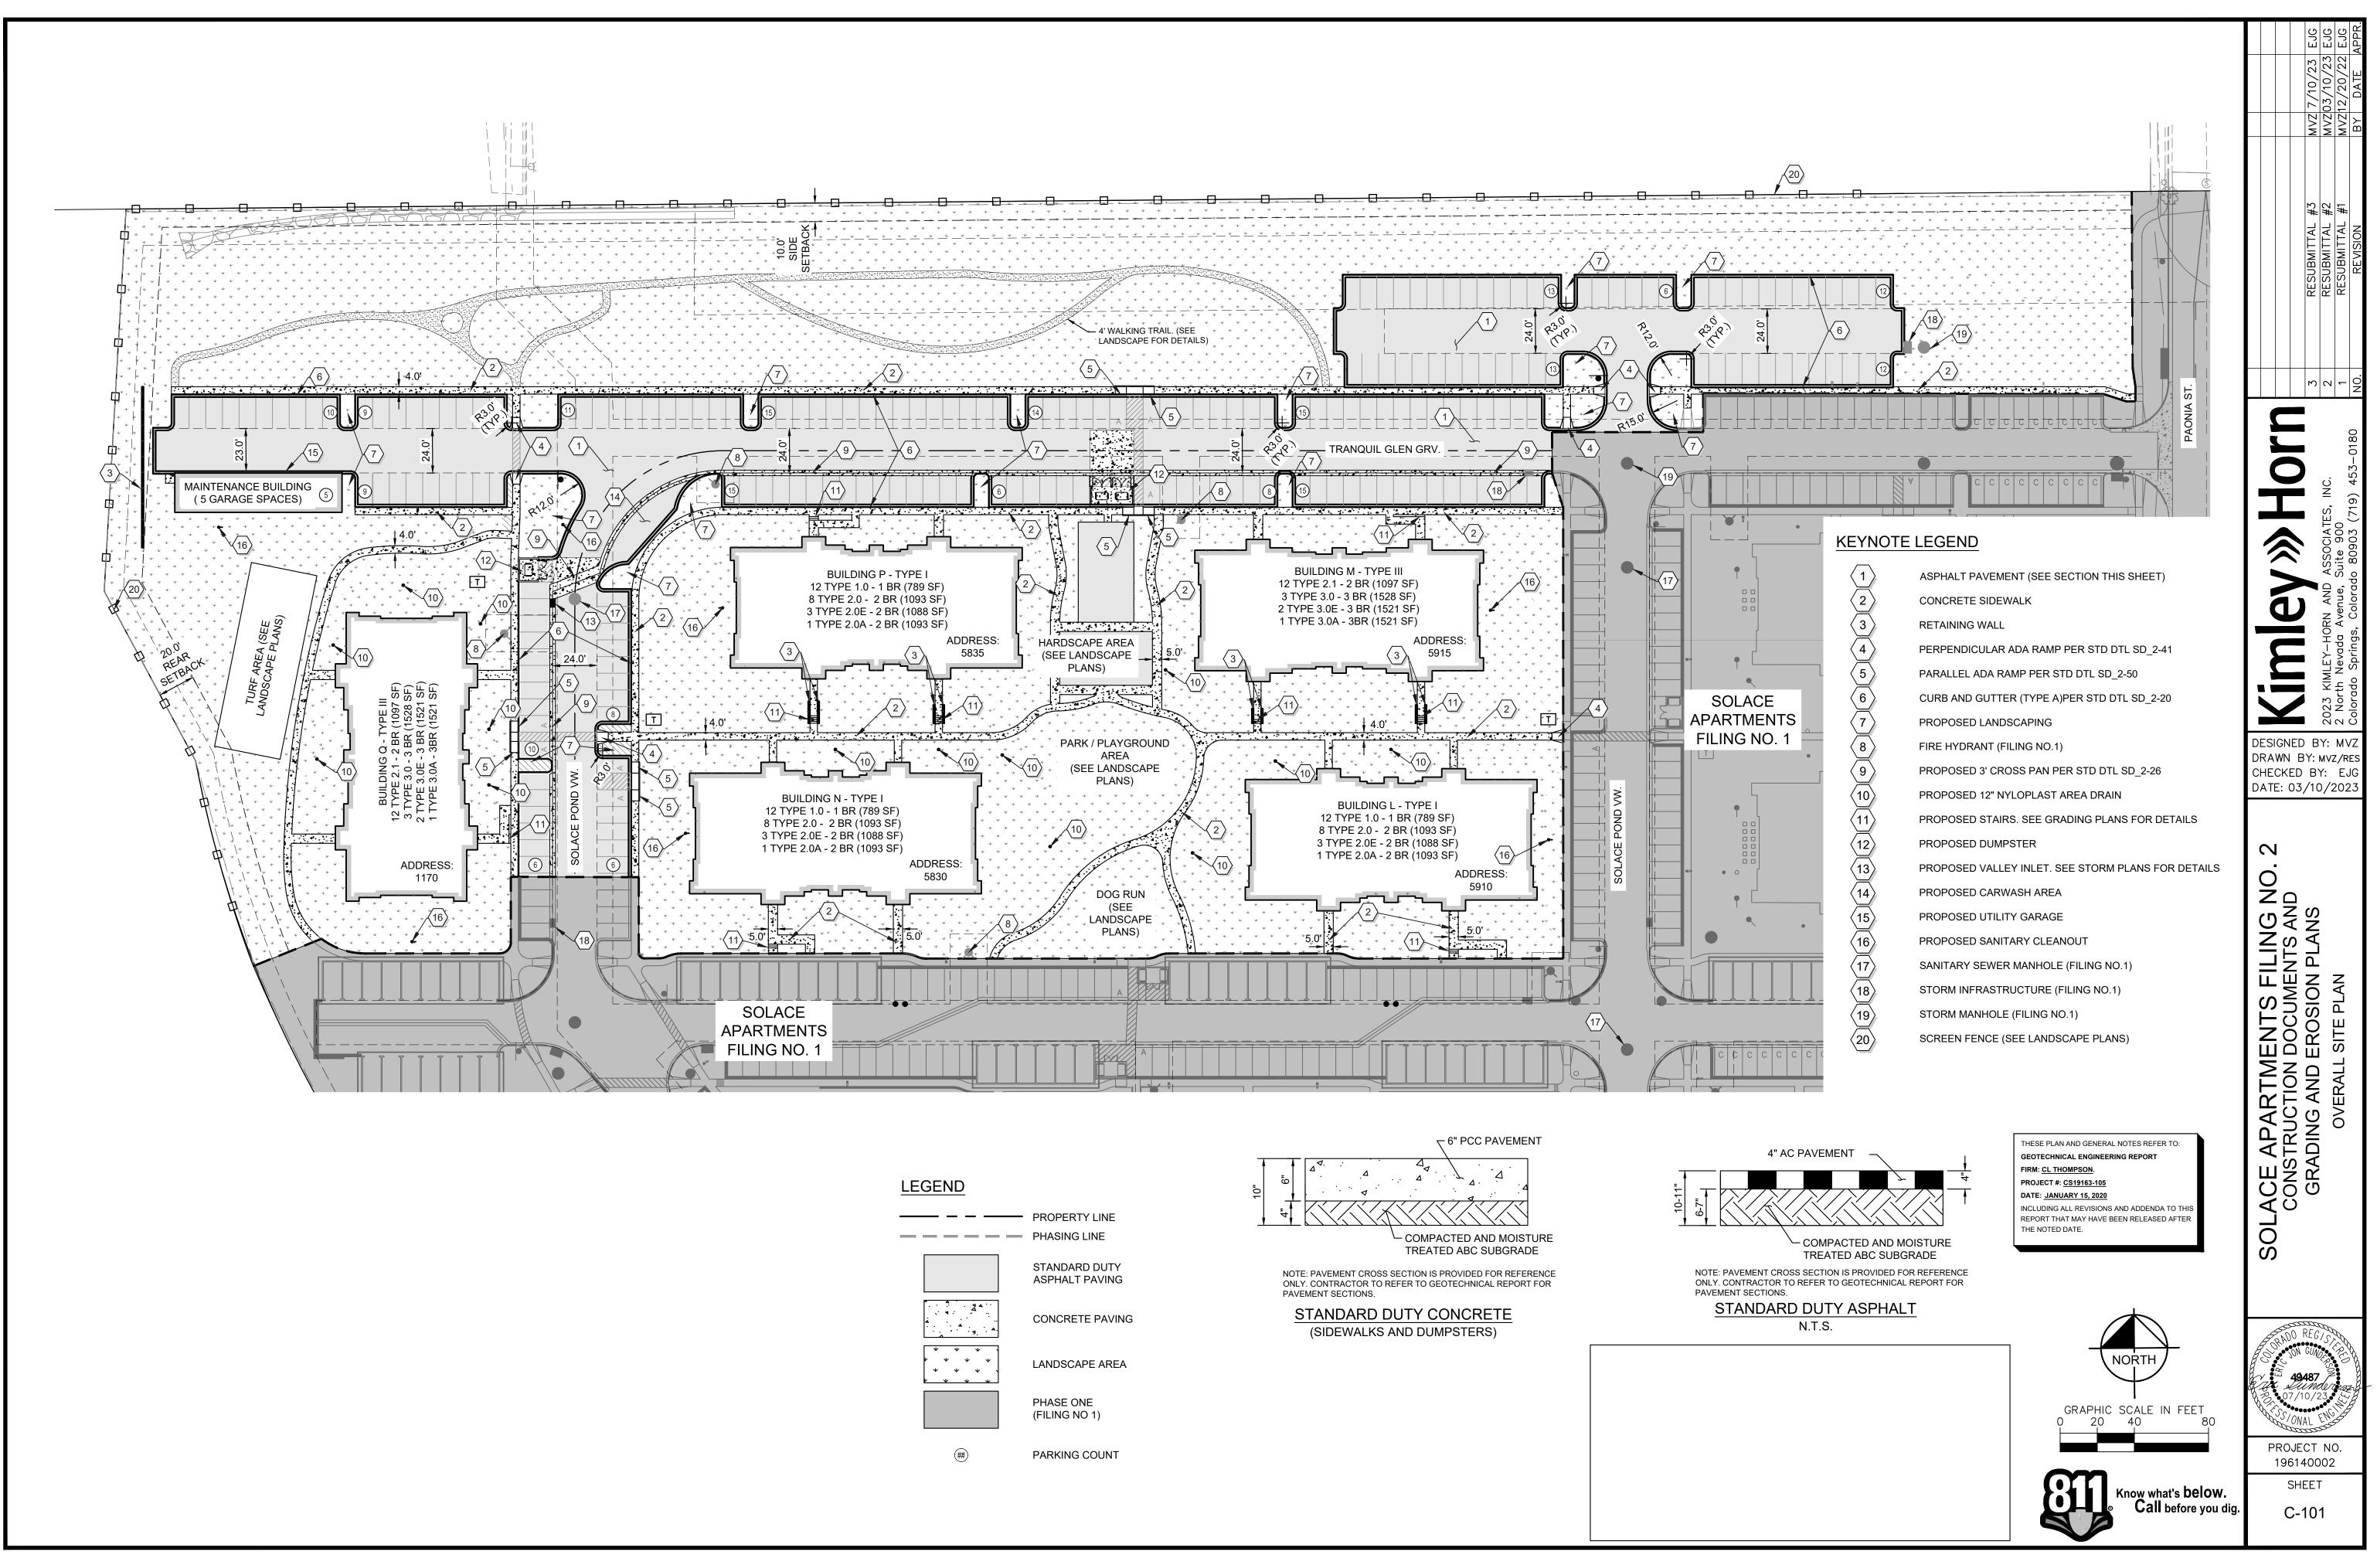

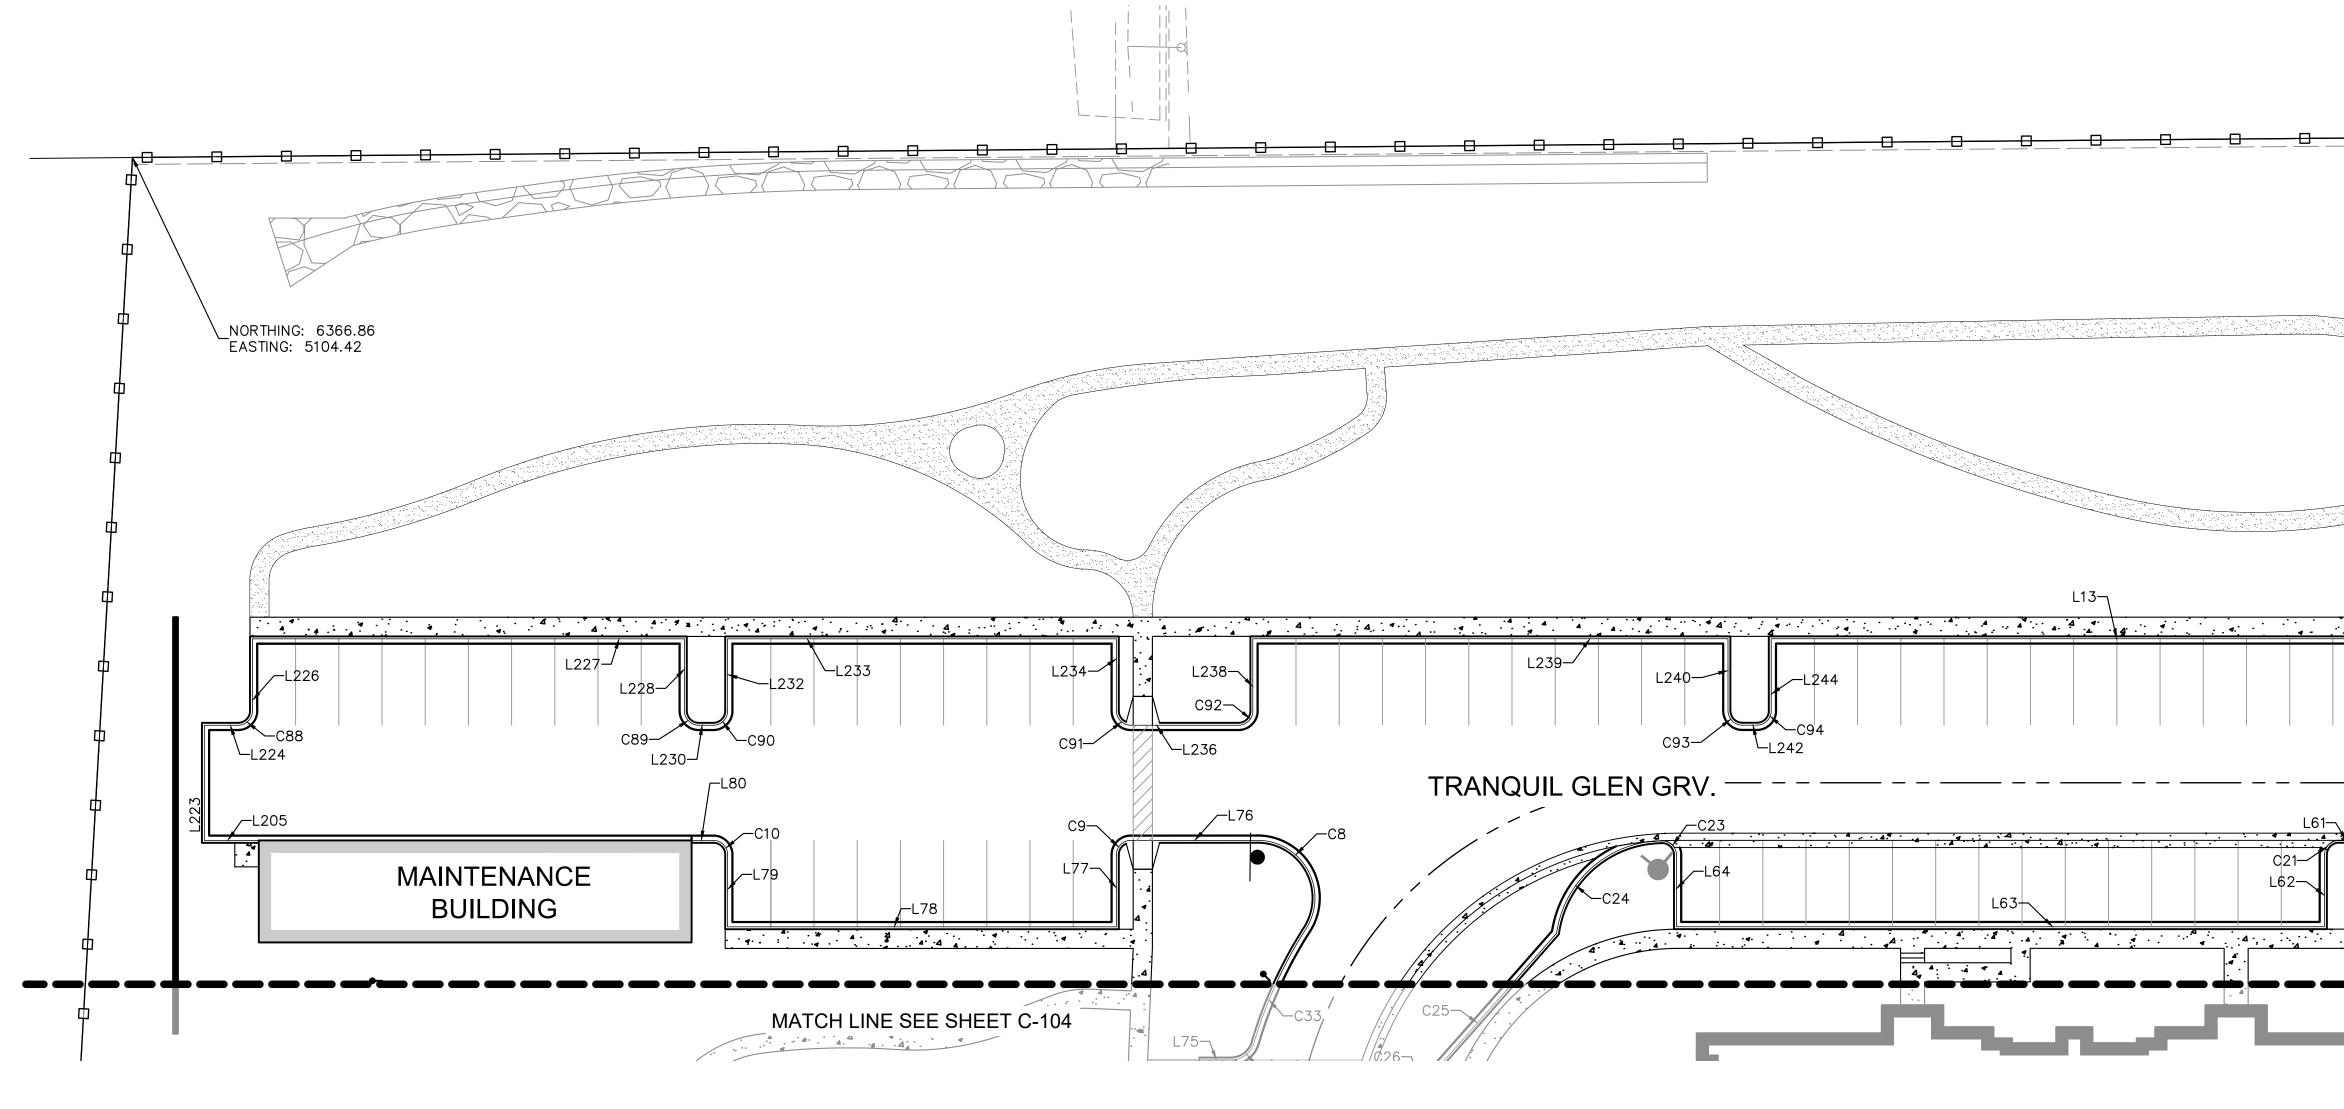


	LINE	TABLE
LINE	LENGTH	BEARING
L13	18.00	S0°27'47.00"W
L13	18.00	S0°27'47.00"W
L59	54.00	N89°32'13.00"W
L60	15.00	N0°27'47.00"E
L61	222.92	N89°32'13.00"W
L62	15.00	S0°27'47.00"W
L63	135.00	N89°32'13.04"W

	LINE	TABLE
LINE	LENGTH	BEARING
L64	14.91	N0°27'47.00"E
L76	26.35	N89°33'39.60"W
L77	15.00	S0°27'47.00"W
L78	81.00	N89°32'13.00"W
L79	15.00	N0°27'47.00"E
L80	4.50	N89°32'13.00"W
L205	11.34	N89°32'13.00"W

	LINE	TABLE
LINE	LENGTH	BEARING
L223	24.00	N0°27'47.00"E
L224	7.00	S89°32'13.00"E
L226	15.00	N0°27'47.00"E
L227	90.00	S89 ° 32'13.00"E
L228	15.00	S0°27'47.00"W
L230	3.00	S89°32'13.00"E
L232	15.00	N0°27'47.00"E

	LINE	TABLE
LINE	LENGTH	BEARING
L233	81.00	S89°32'13.00"E
L234	15.00	S0°27'47.00"W
L236	22.42	S89 ° 32'26.34"E
L238	15.02	N0°27'47.00"E
L239	99.00	S89°32'13.00"E
L240	15.00	S0°27'47.00"W
L242	3.00	S89°32'13.00"E

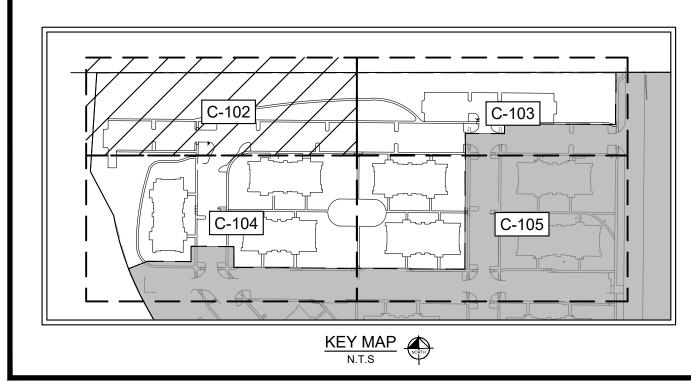



\COS_LA\196140002 - Cimarron Hills\Phase 2\CADD\PlanSheets\CD\196140002 - CD_HC.dwg Zimmermann, Mitch 7/10/2023 9:40 A


	LINE TABLE		
NG	LINE	LENGTH	BEARING
3.00"E	L244	15.00	N0°27'47.00"E
.00"W	L245	15.00	S0°27'47.00"W
6.34"E	L247	3.00	S89°32'13.00"E
7.00"E	L249	15.00	N0°27'47.00"E
3.00"E	L250	54.00	S89°32'13.00"E
.00"W			

	CURVE TABLE					
CURVE	RADIUS	LENGTH	CHORD BEARING	CHORD	DELTA	TANGENT
C8	12.00'	25.68'	N28°13'39"W	21.05'	122 ° 37'07"	21.93'
C9	3.00'	4.71'	S45°27'04"W	4.24'	89 ° 58'33"	3.00'
C10	3.00'	4.71'	N44°32'13"W	4.24'	90°00'00"	3.00'
C21	3.00'	4.71'	S45°27'47"W	4.24'	90°00'00"	3.00'
C21	3.00'	4.71'	S45°27'47"W	4.24'	90°00'00"	3.00'
C22	3.00'	4.71'	N44°32'13"W	4.24'	90°00'00"	3.00'
C22	3.00'	4.71'	N44°32'13"W	4.24'	90°00'00"	3.00'
C23	3.00'	4.74'	N44°50'44"W	4.27'	90 ° 37'02"	3.03'
C23	3.00'	4.74'	N44°50'44"W	4.27'	90 ° 37'02"	3.03'
C24	22.41'	31.83'	S49 ° 10'11"W	29.22'	81°21'08"	19.26'

CURVE	RADIUS	LENGTH
C24	22.41'	31.83'
C88	3.00'	4.71'
C89	3.00'	4.71'
C90	3.00'	4.71'
C91	3.00'	4.71'
C92	3.00'	4.71'
C93	3.00'	4.71'
C94	3.00'	4.71'
C95	3.00'	4.71'
C96	3.00'	4.71'



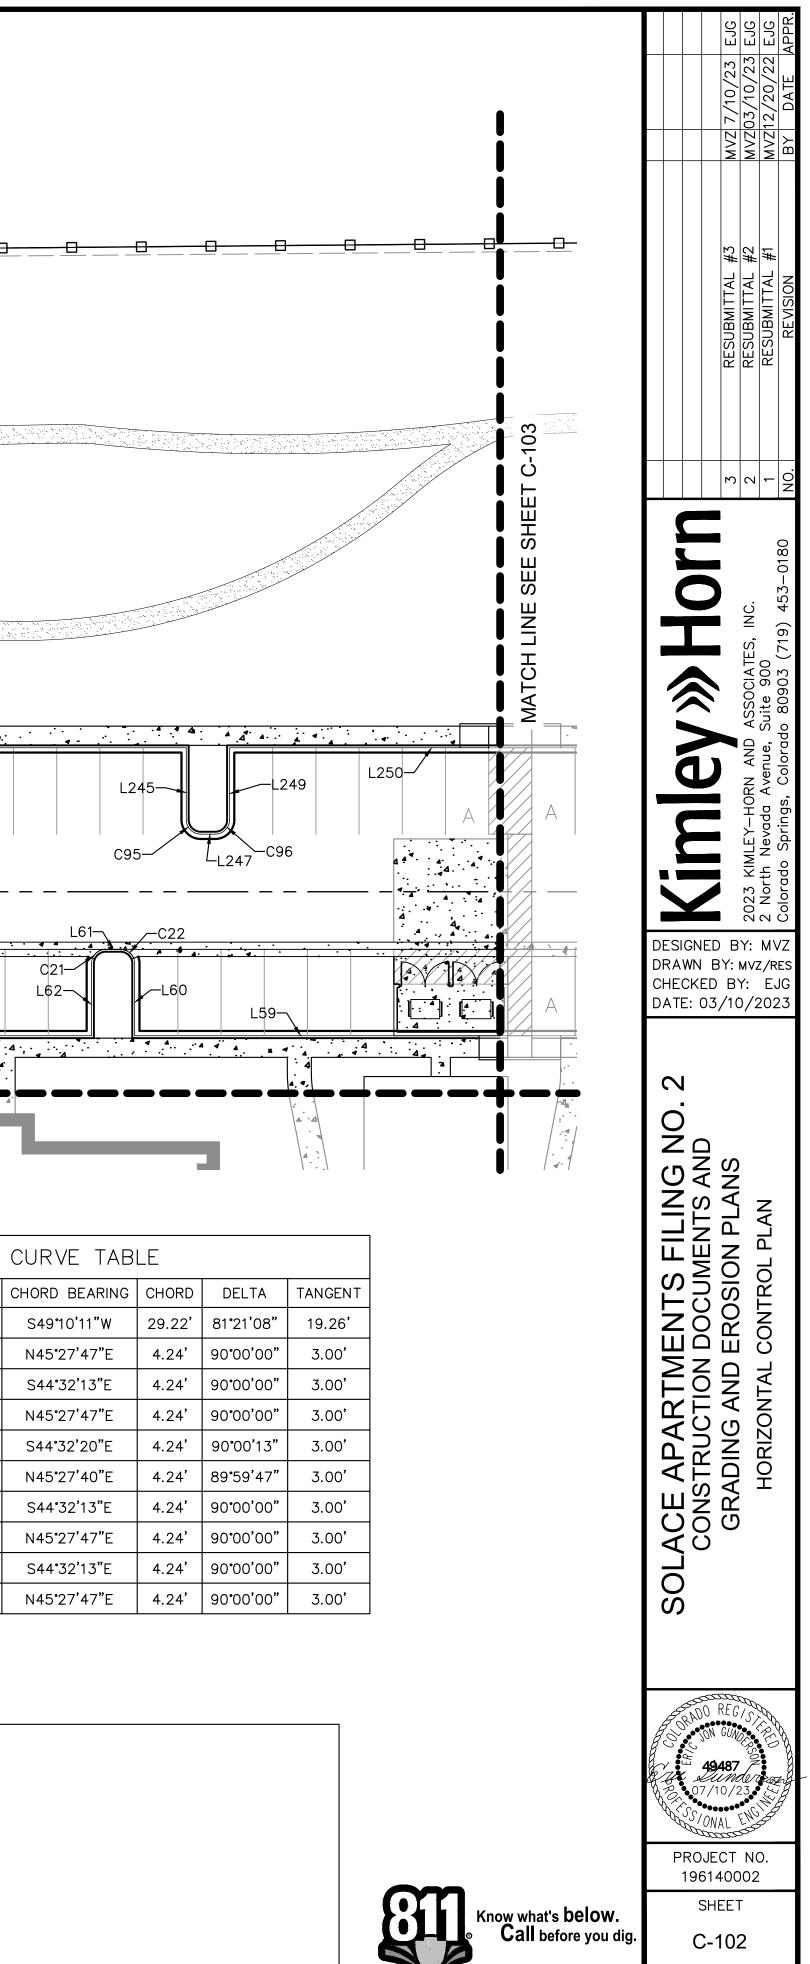

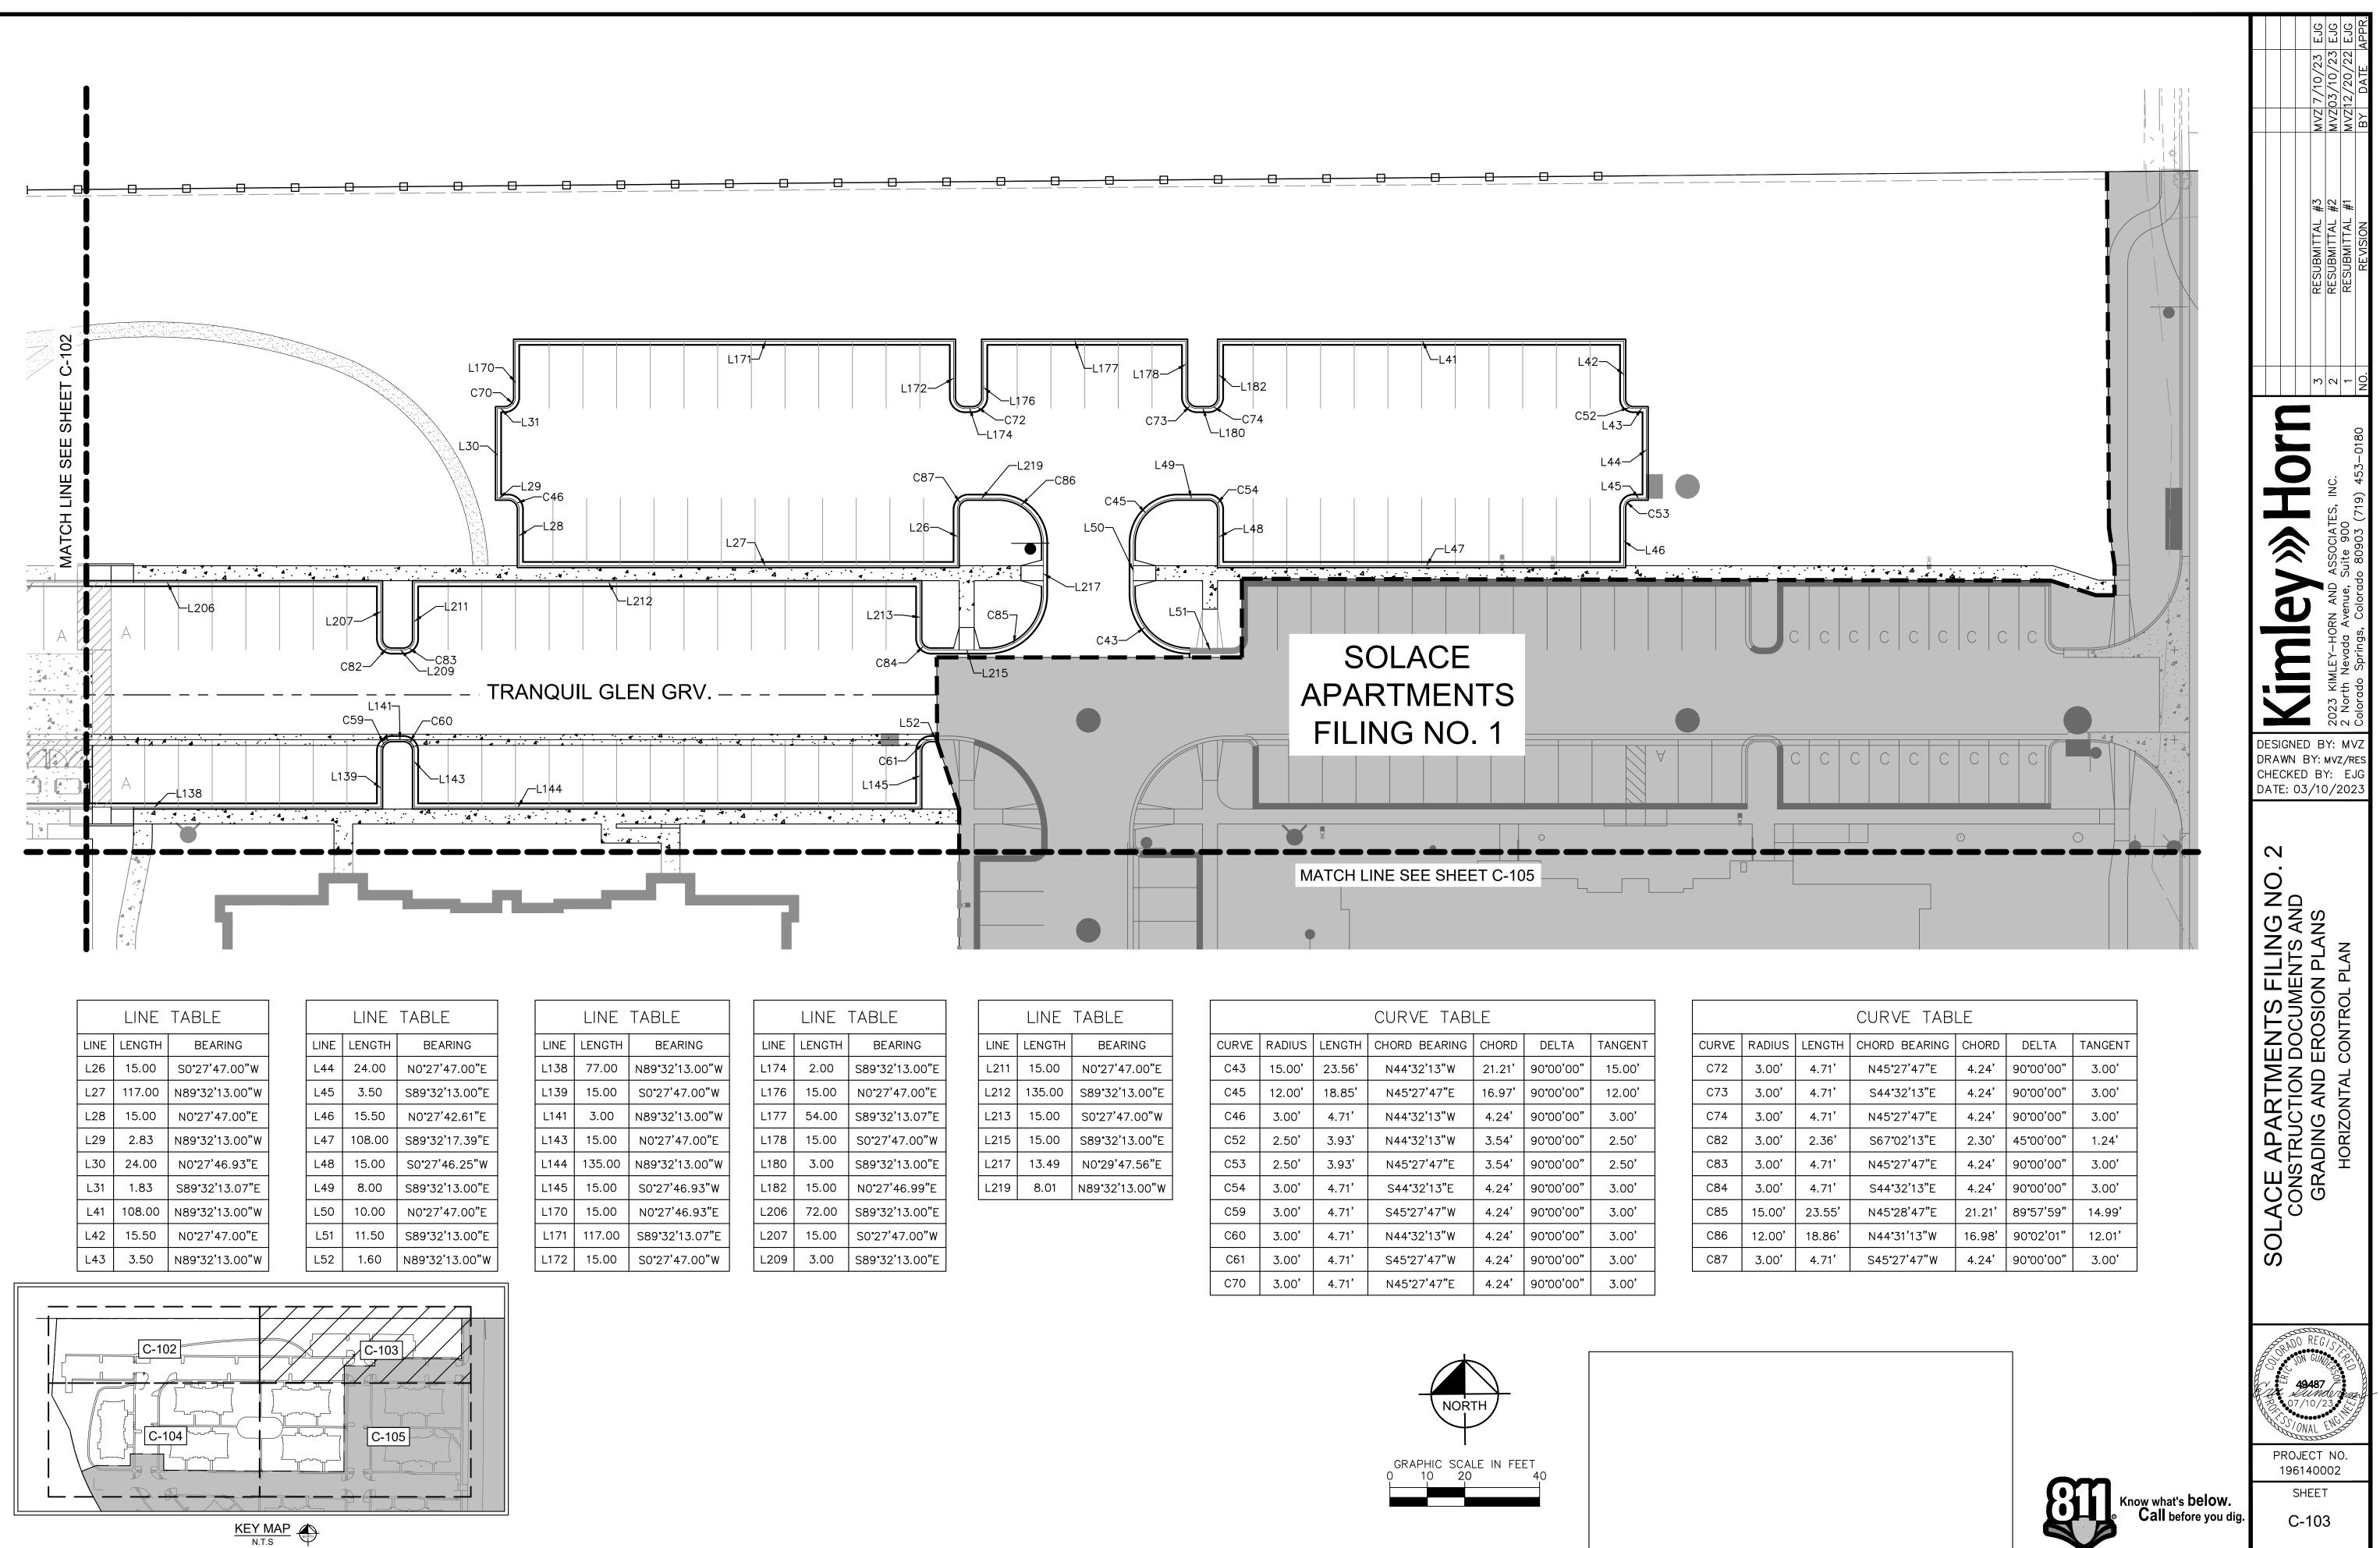



INE	TABLE
ENGTH	BEARING
2.00	S89 ° 32'13.00"E
5.00	N0°27'47.00"E
54.00	S89 ° 32'13.07"E
5.00	S0°27'47.00"W
3.00	S89 ° 32'13.00"E
5.00	N0°27'46.99"E
2.00	S89 ° 32'13.00"E
5.00	S0°27'47.00"W
3.00	S89 ° 32'13.00"E

LINE TABLE			
LINE	LENGTH	BEARING	
L211	15.00	N0°27'47.00"E	
L212	135.00	S89°32'13.00"E	
L213	15.00	S0°27'47.00"W	
L215	15.00	S89°32'13.00"E	
L217	13.49	N0 ° 29'47.56"E	
L219	8.01	N89°32'13.00"W	


CURVE TABLE						
CURVE	RADIUS	LENGTH	CHORD BEARING	CHORD	DELTA	TANGENT
C43	15.00'	23.56'	N44°32'13"W	21.21'	90°00'00"	15.00'
C45	12.00'	18.85'	N45°27'47"E	16.97'	90 ° 00'00"	12.00'
C46	3.00'	4.71'	N44°32'13"W	4.24'	90°00'00"	3.00'
C52	2.50'	3.93'	N44°32'13"W	3.54'	90°00'00"	2.50'
C53	2.50'	3.93'	N45°27'47"E	3.54'	90°00'00"	2.50'
C54	3.00'	4.71'	S44°32'13"E	4.24'	90 ° 00'00"	3.00'
C59	3.00'	4.71'	S45°27'47"W	4.24'	90°00'00"	3.00'
C60	3.00'	4.71'	N44°32'13"W	4.24'	90 ° 00'00"	3.00'
C61	3.00'	4.71'	S45°27'47"W	4.24'	90 ° 00'00"	3.00'
C70	3.00'	4.71'	N45°27'47"E	4.24'	90 ° 00'00"	3.00'


CURVE	
C72	
C73	
C74	
C82	
C83	
C84	
C85	
C86	
C87	

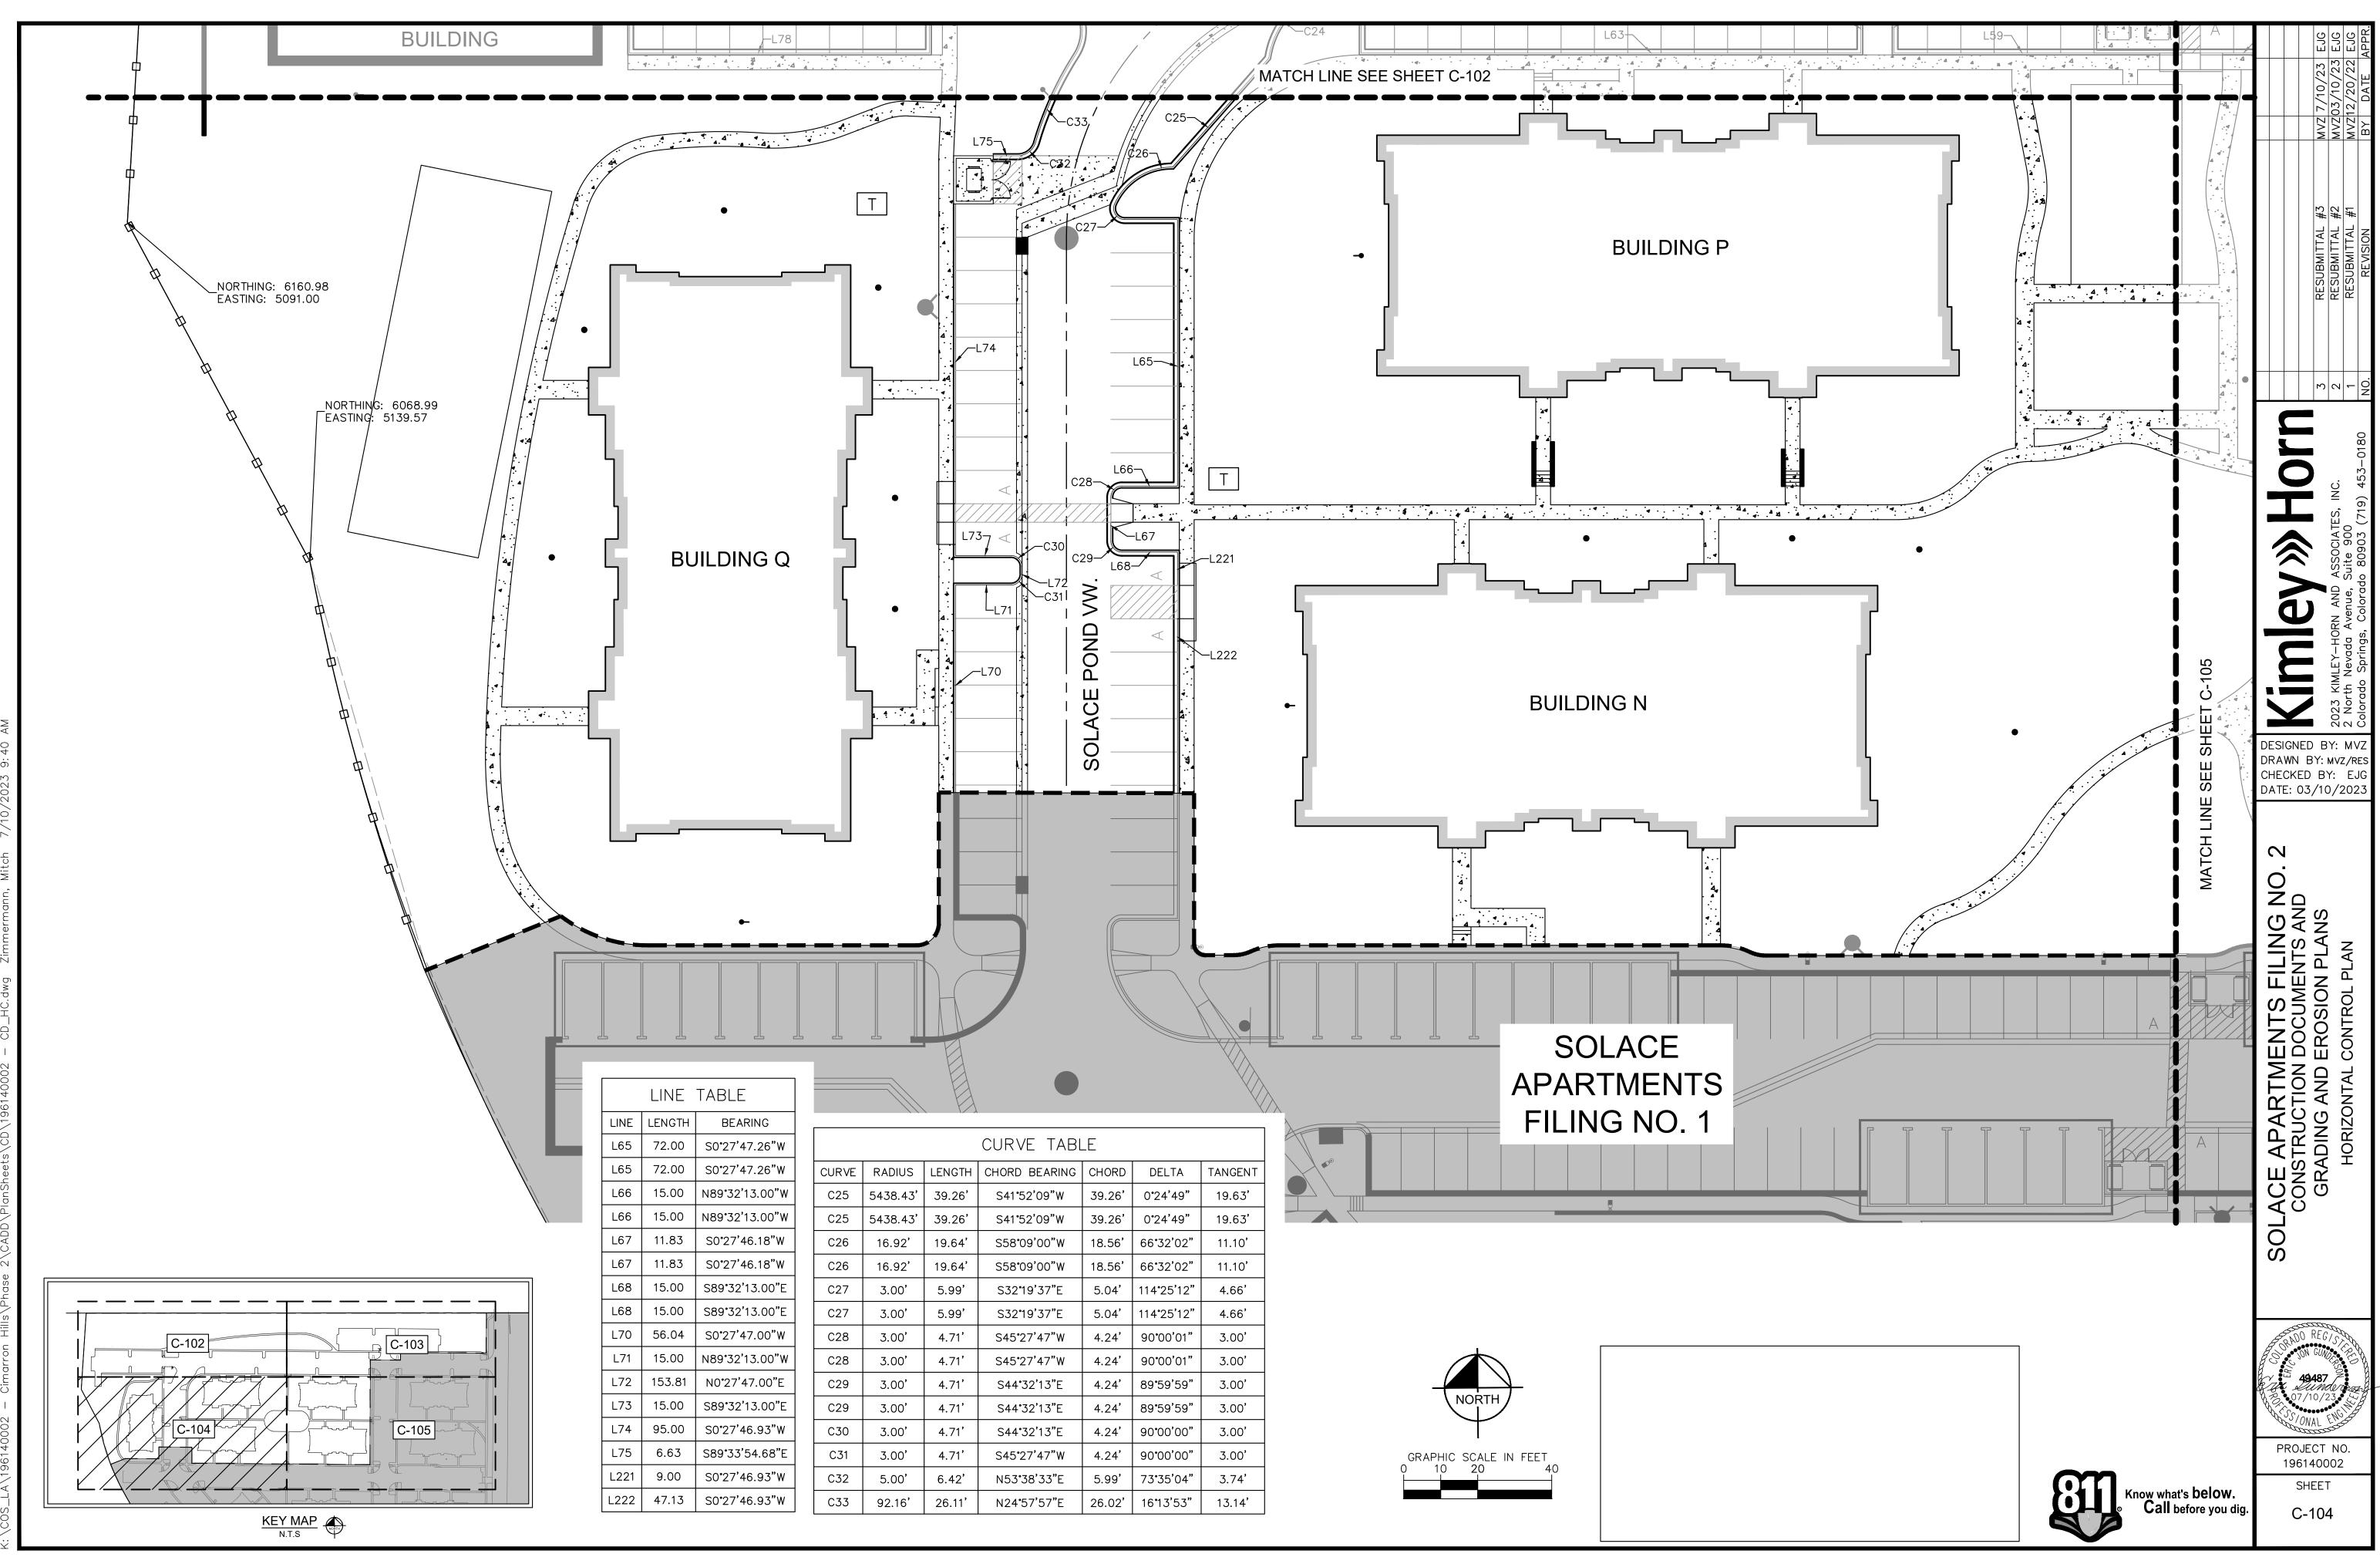

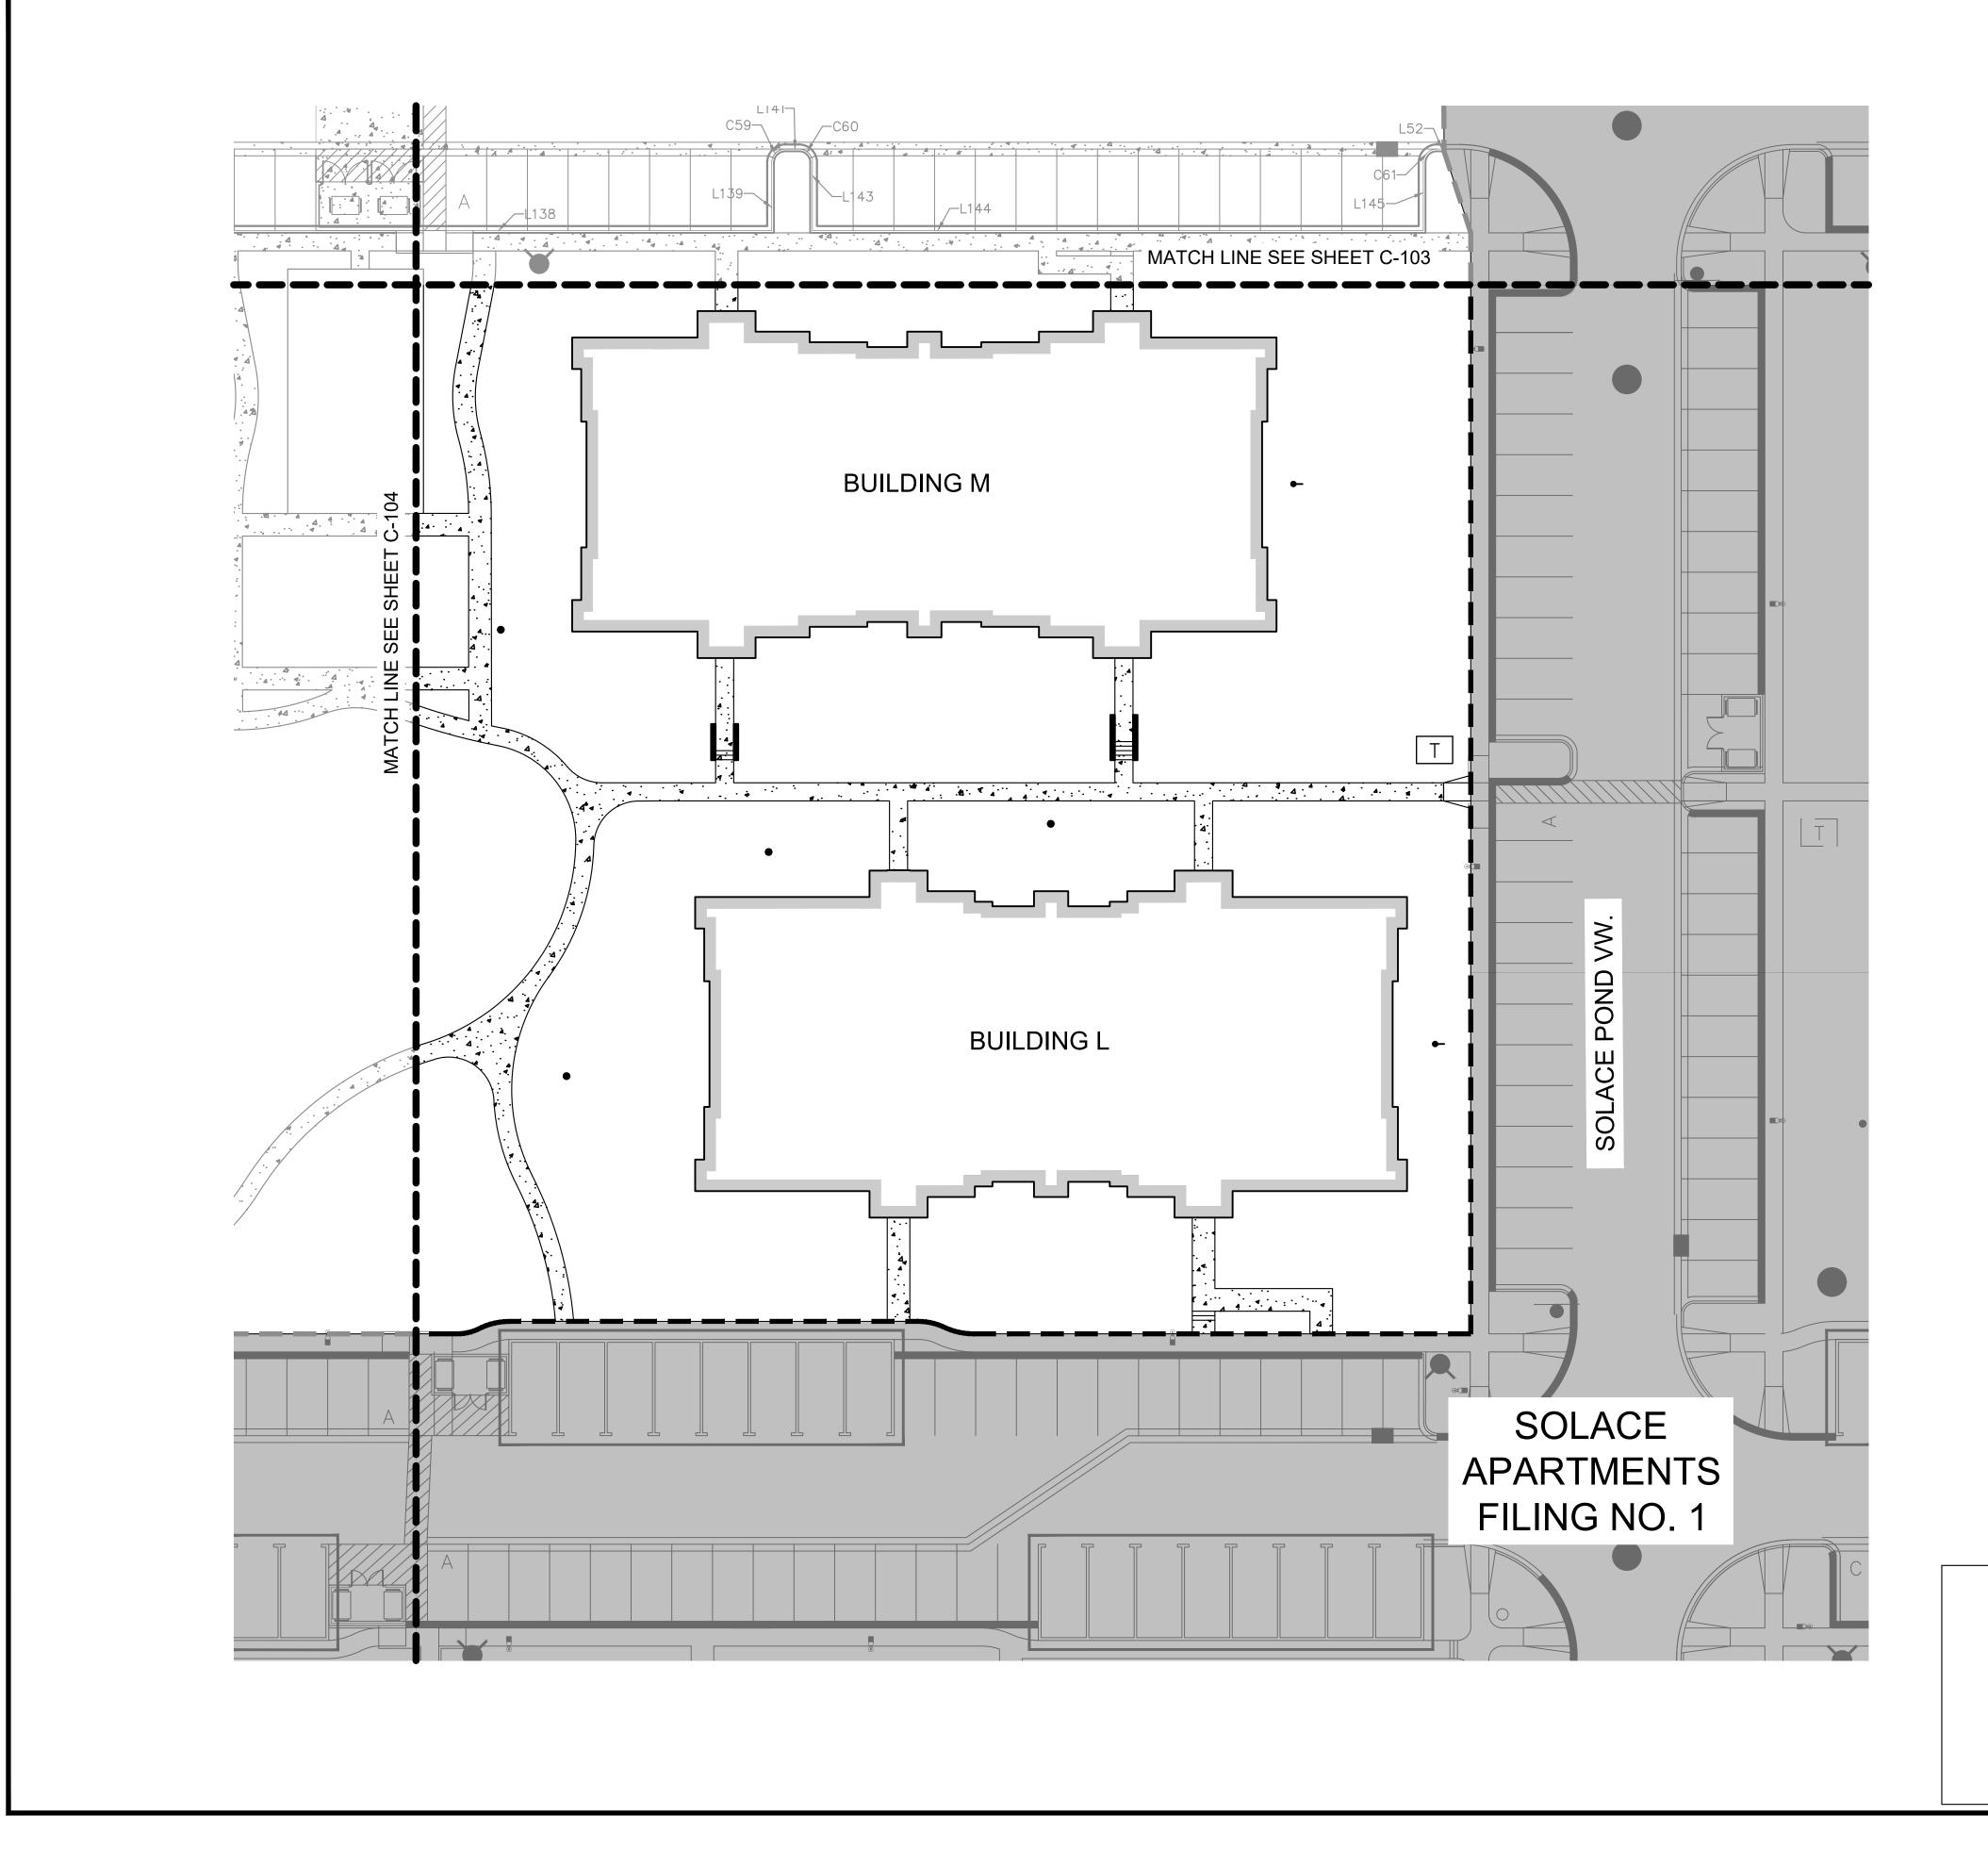


COS_LA\196140002 - Cimarron Hills\Phase 2\CADD\PlanSheets\CD\196140002 - CD_HC.dwg Zimmermann, Mitch 7/10/2023 9:40 AN

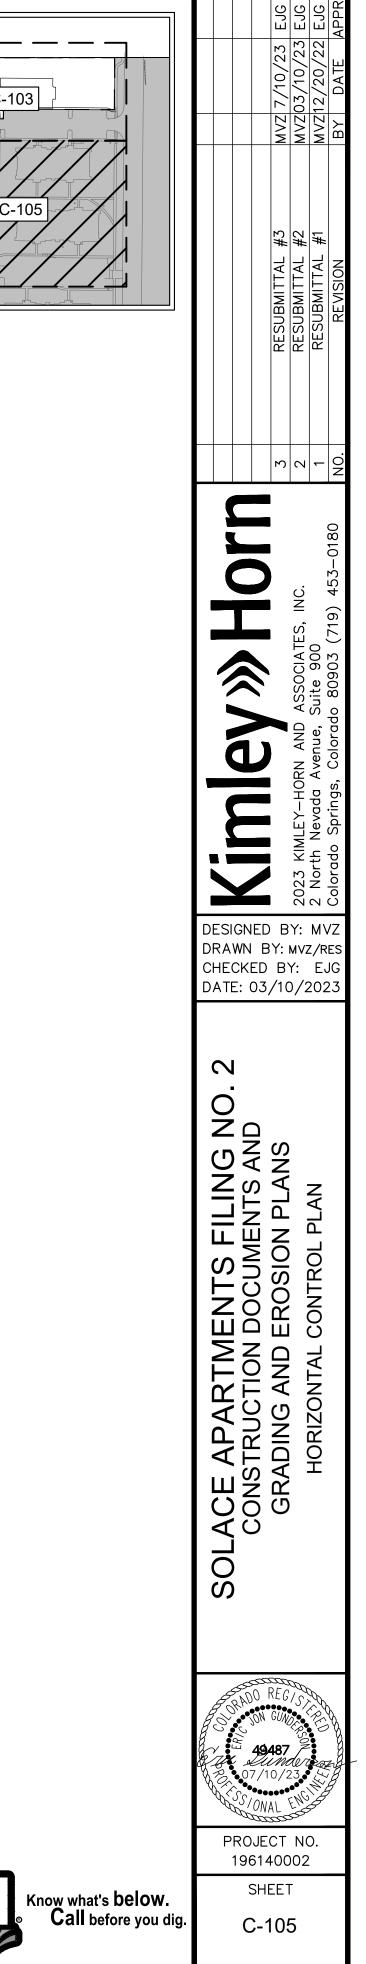


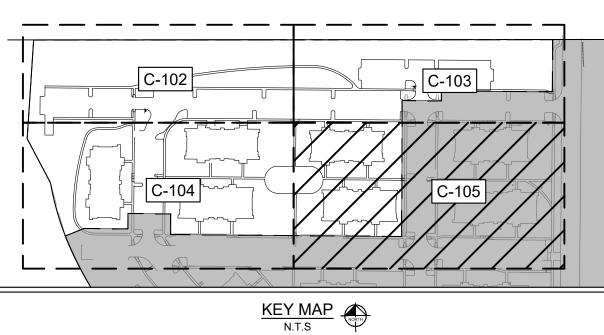


NORT⊦ GRAPHIC SCALE IN FEET 40

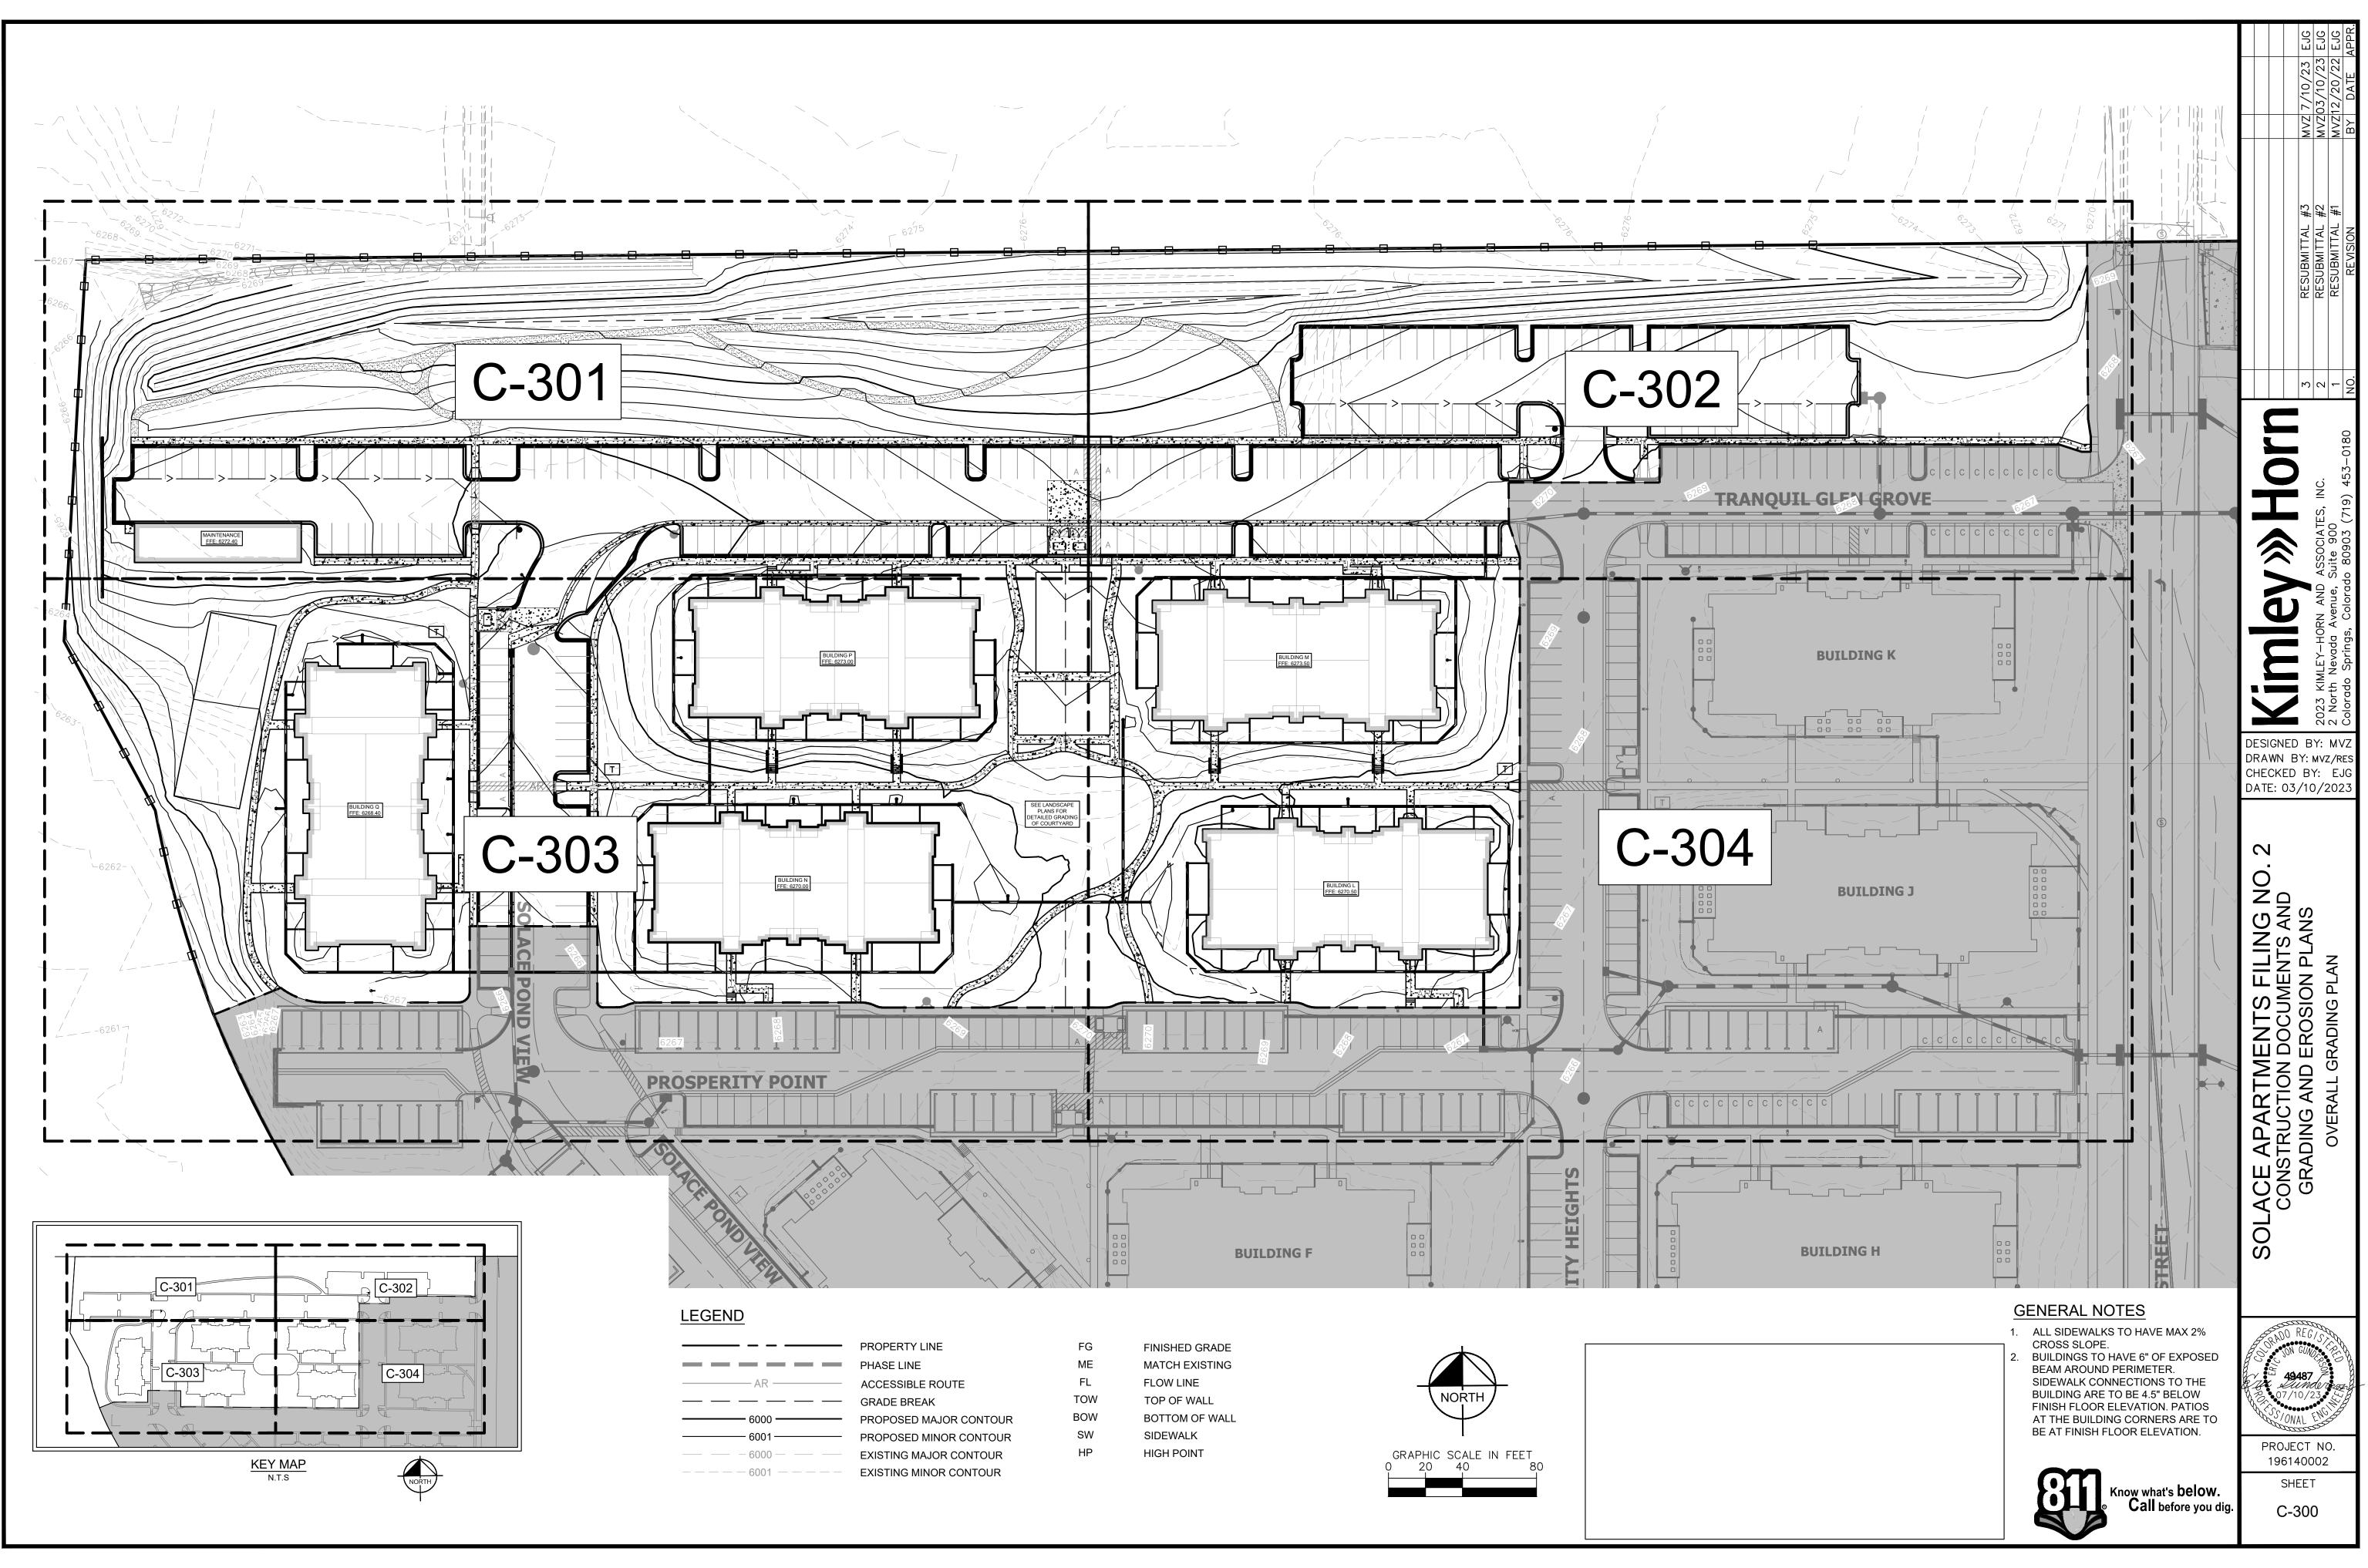


 PROPERTY LINE
PHASE LINE
 ACCESSIBLE ROUTE
 GRADE BREAK
 PROPOSED MAJOR CONTOUR
 PROPOSED MINOR CONTOUR
 EXISTING MAJOR CONTOUR
 EXISTING MINOR CONTOUR

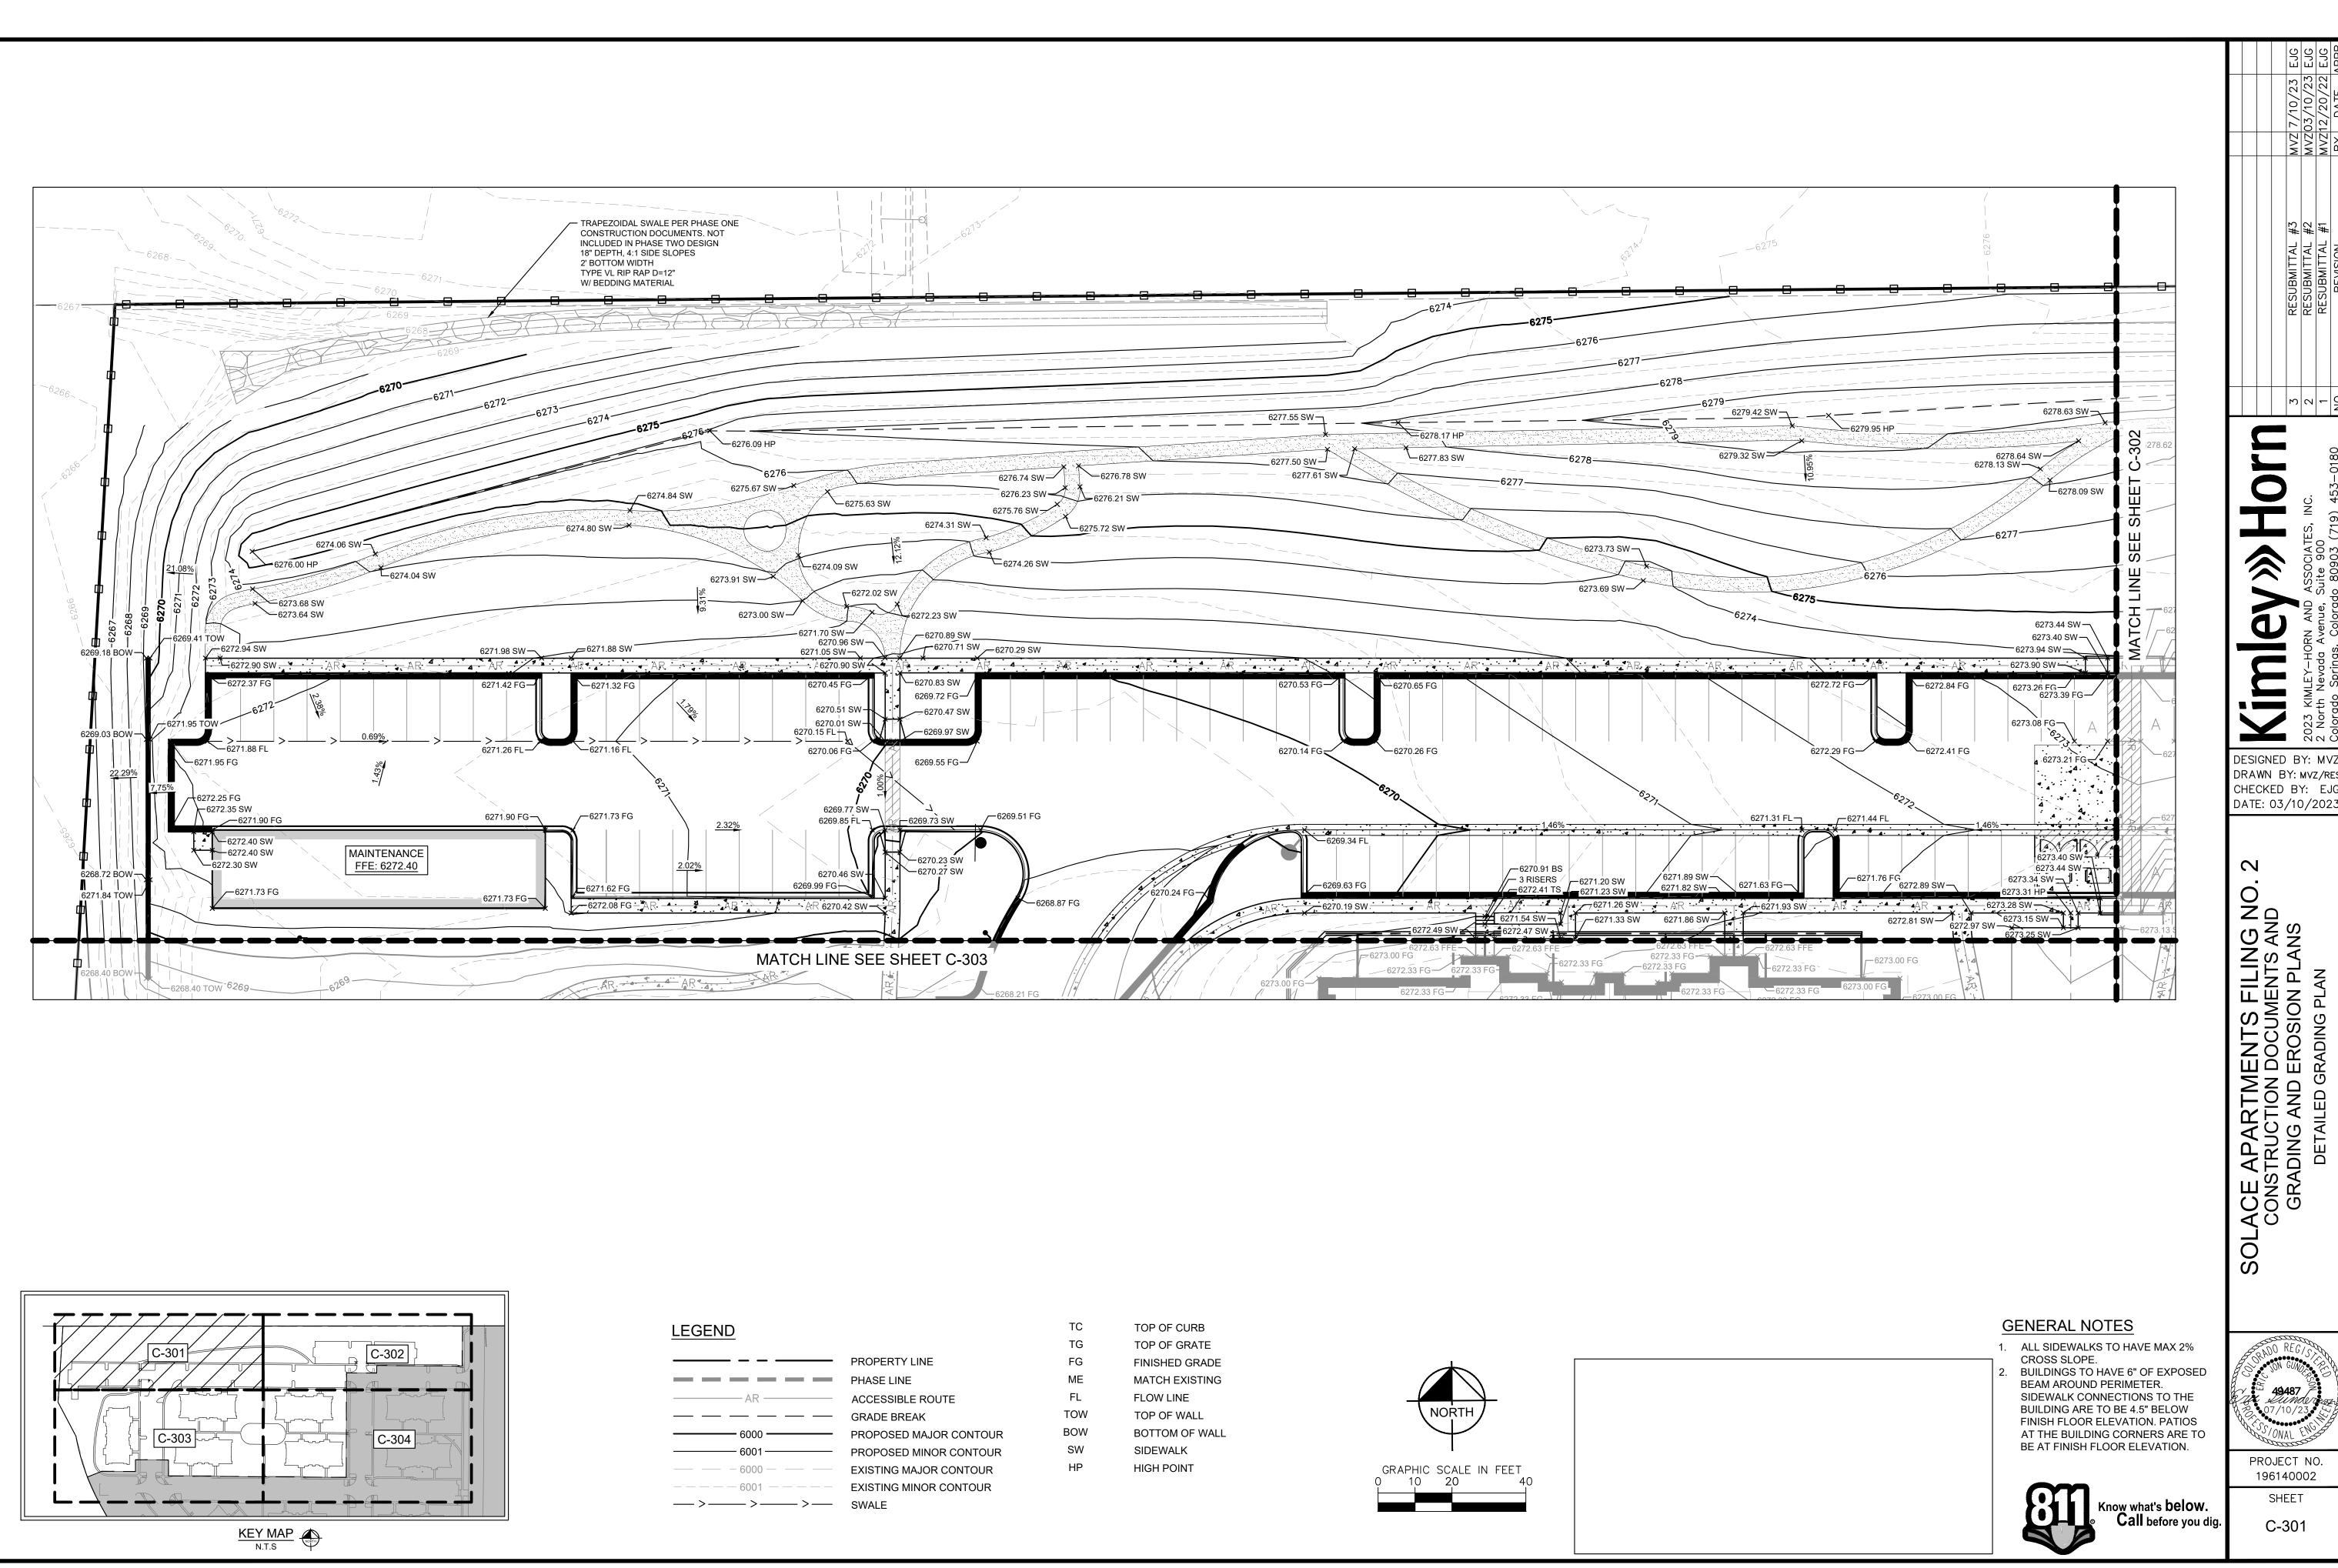

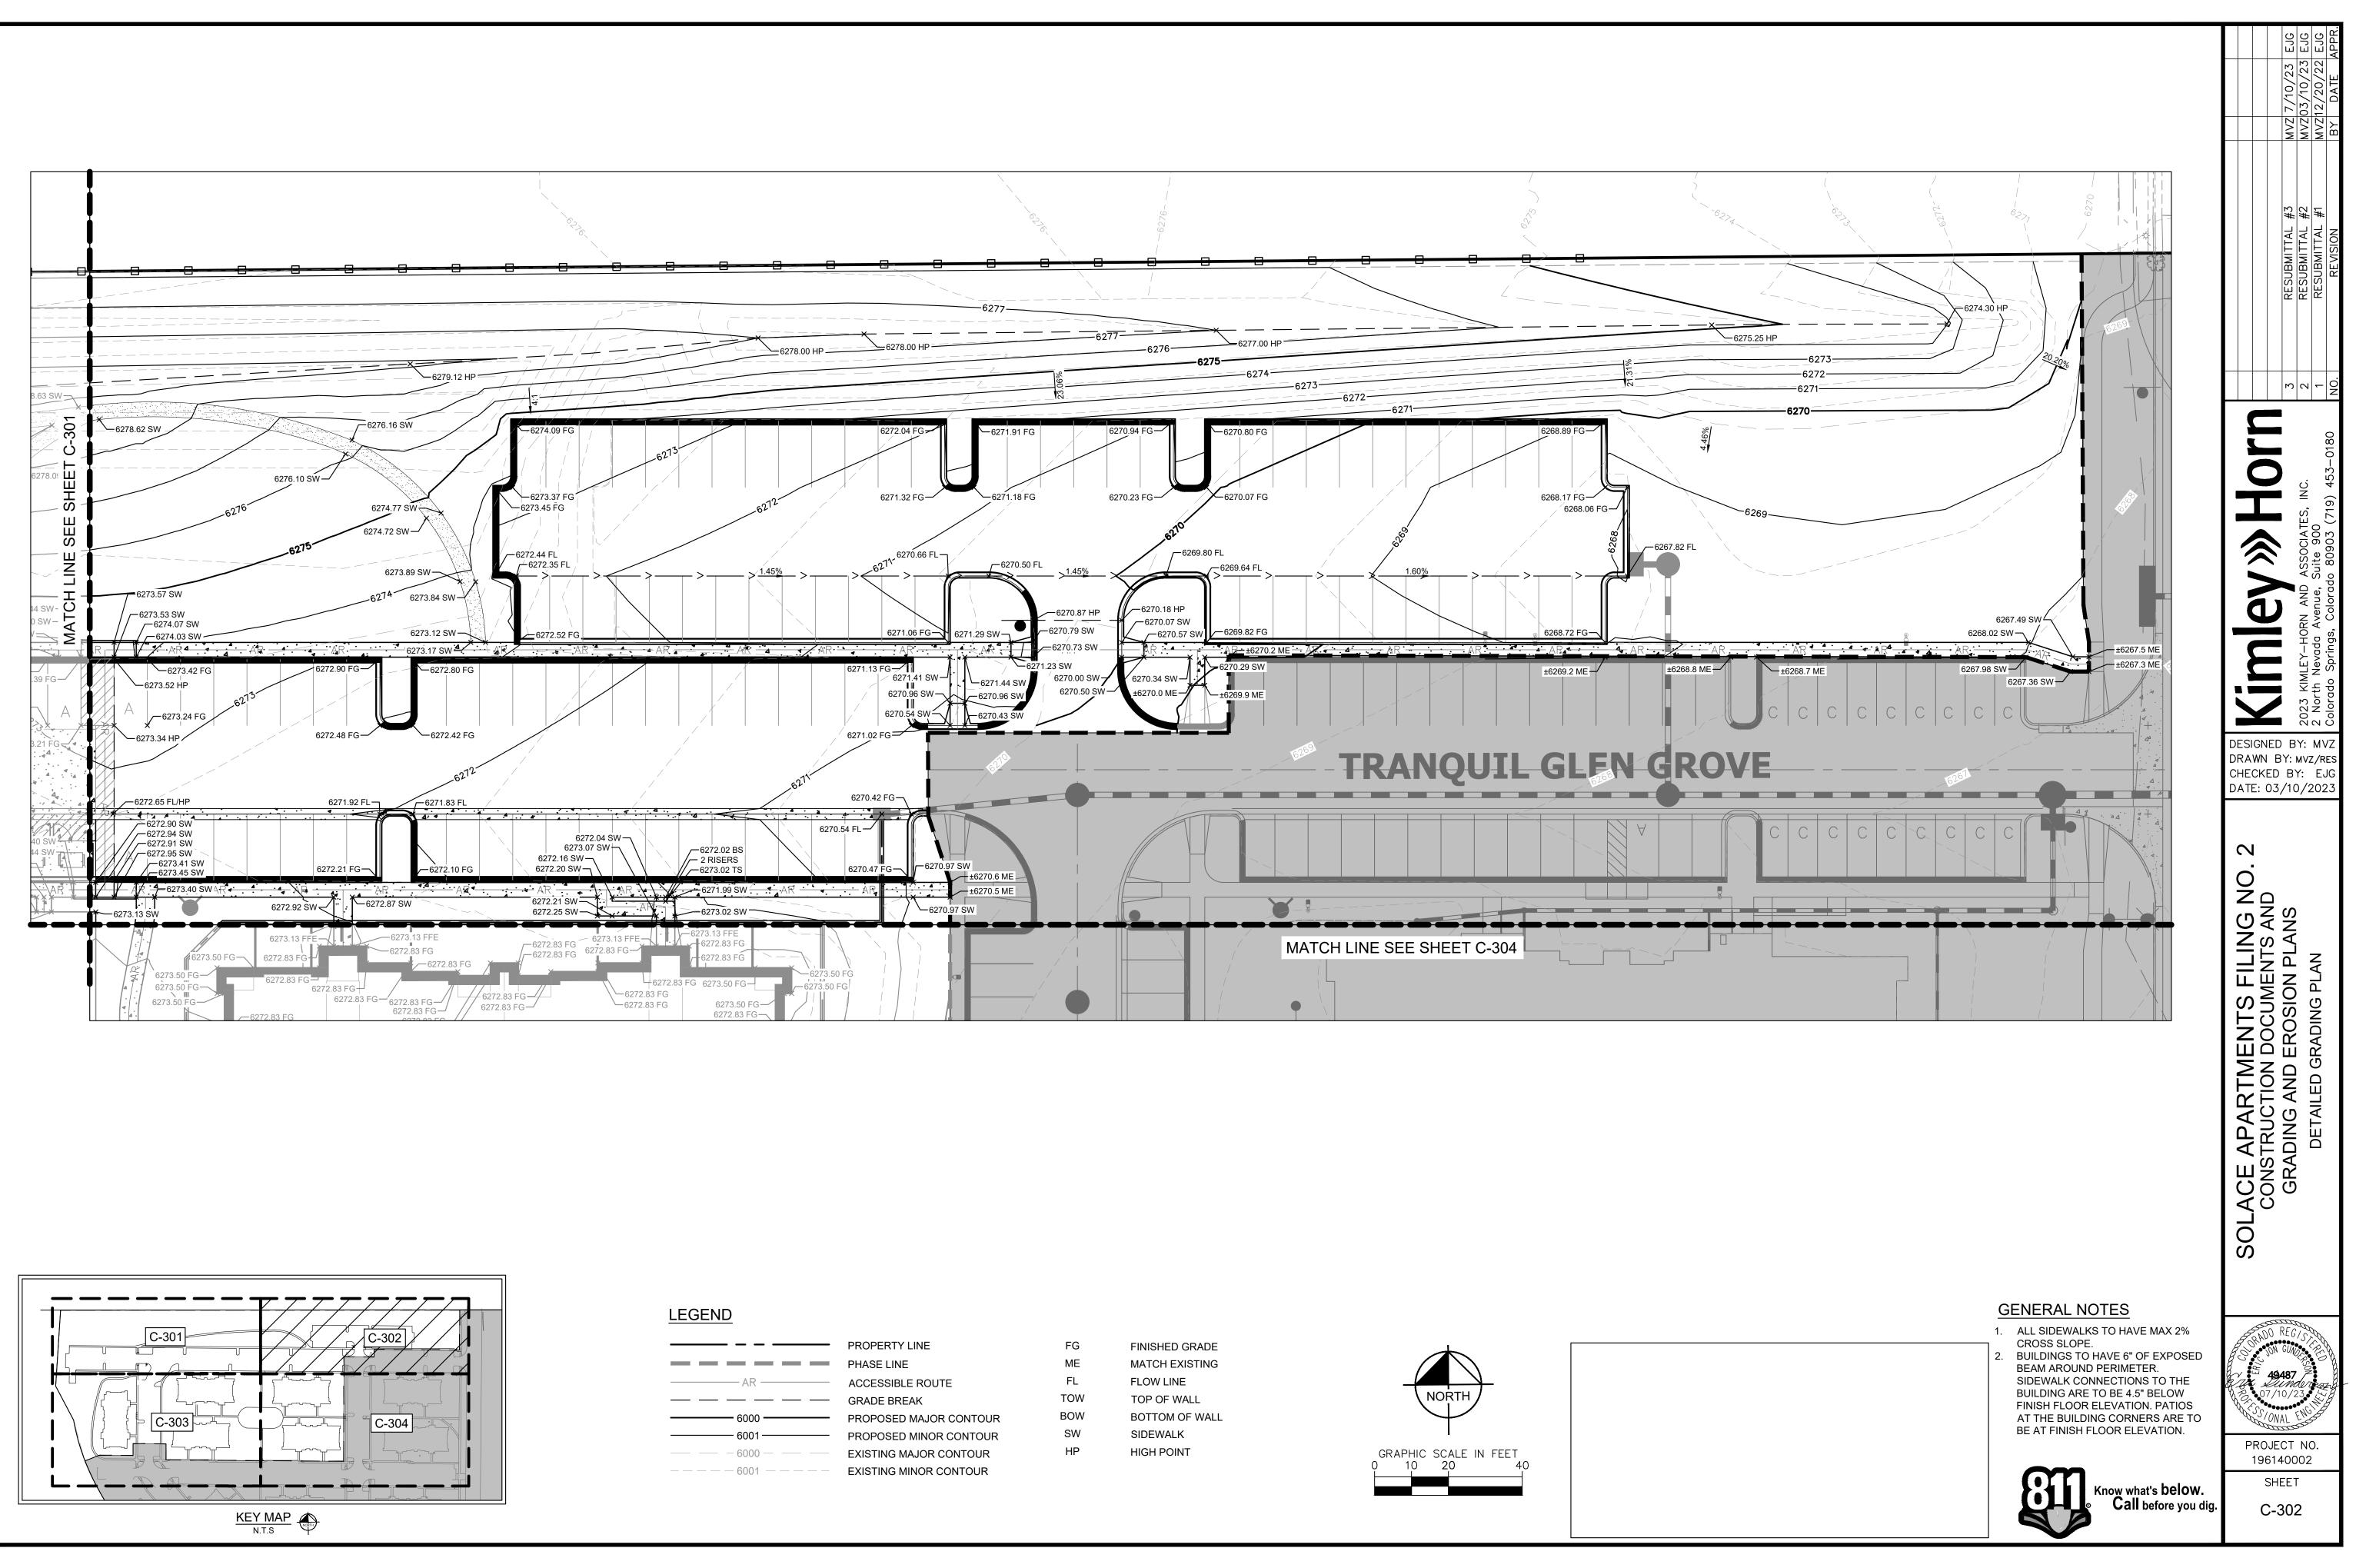


PERTY LINE
ELINE
SSIBLE ROUTE
DE BREAK
OSED MAJOR CONTOUR
OSED MINOR CONTOUR
ING MAJOR CONTOUR
ING MINOR CONTOUR

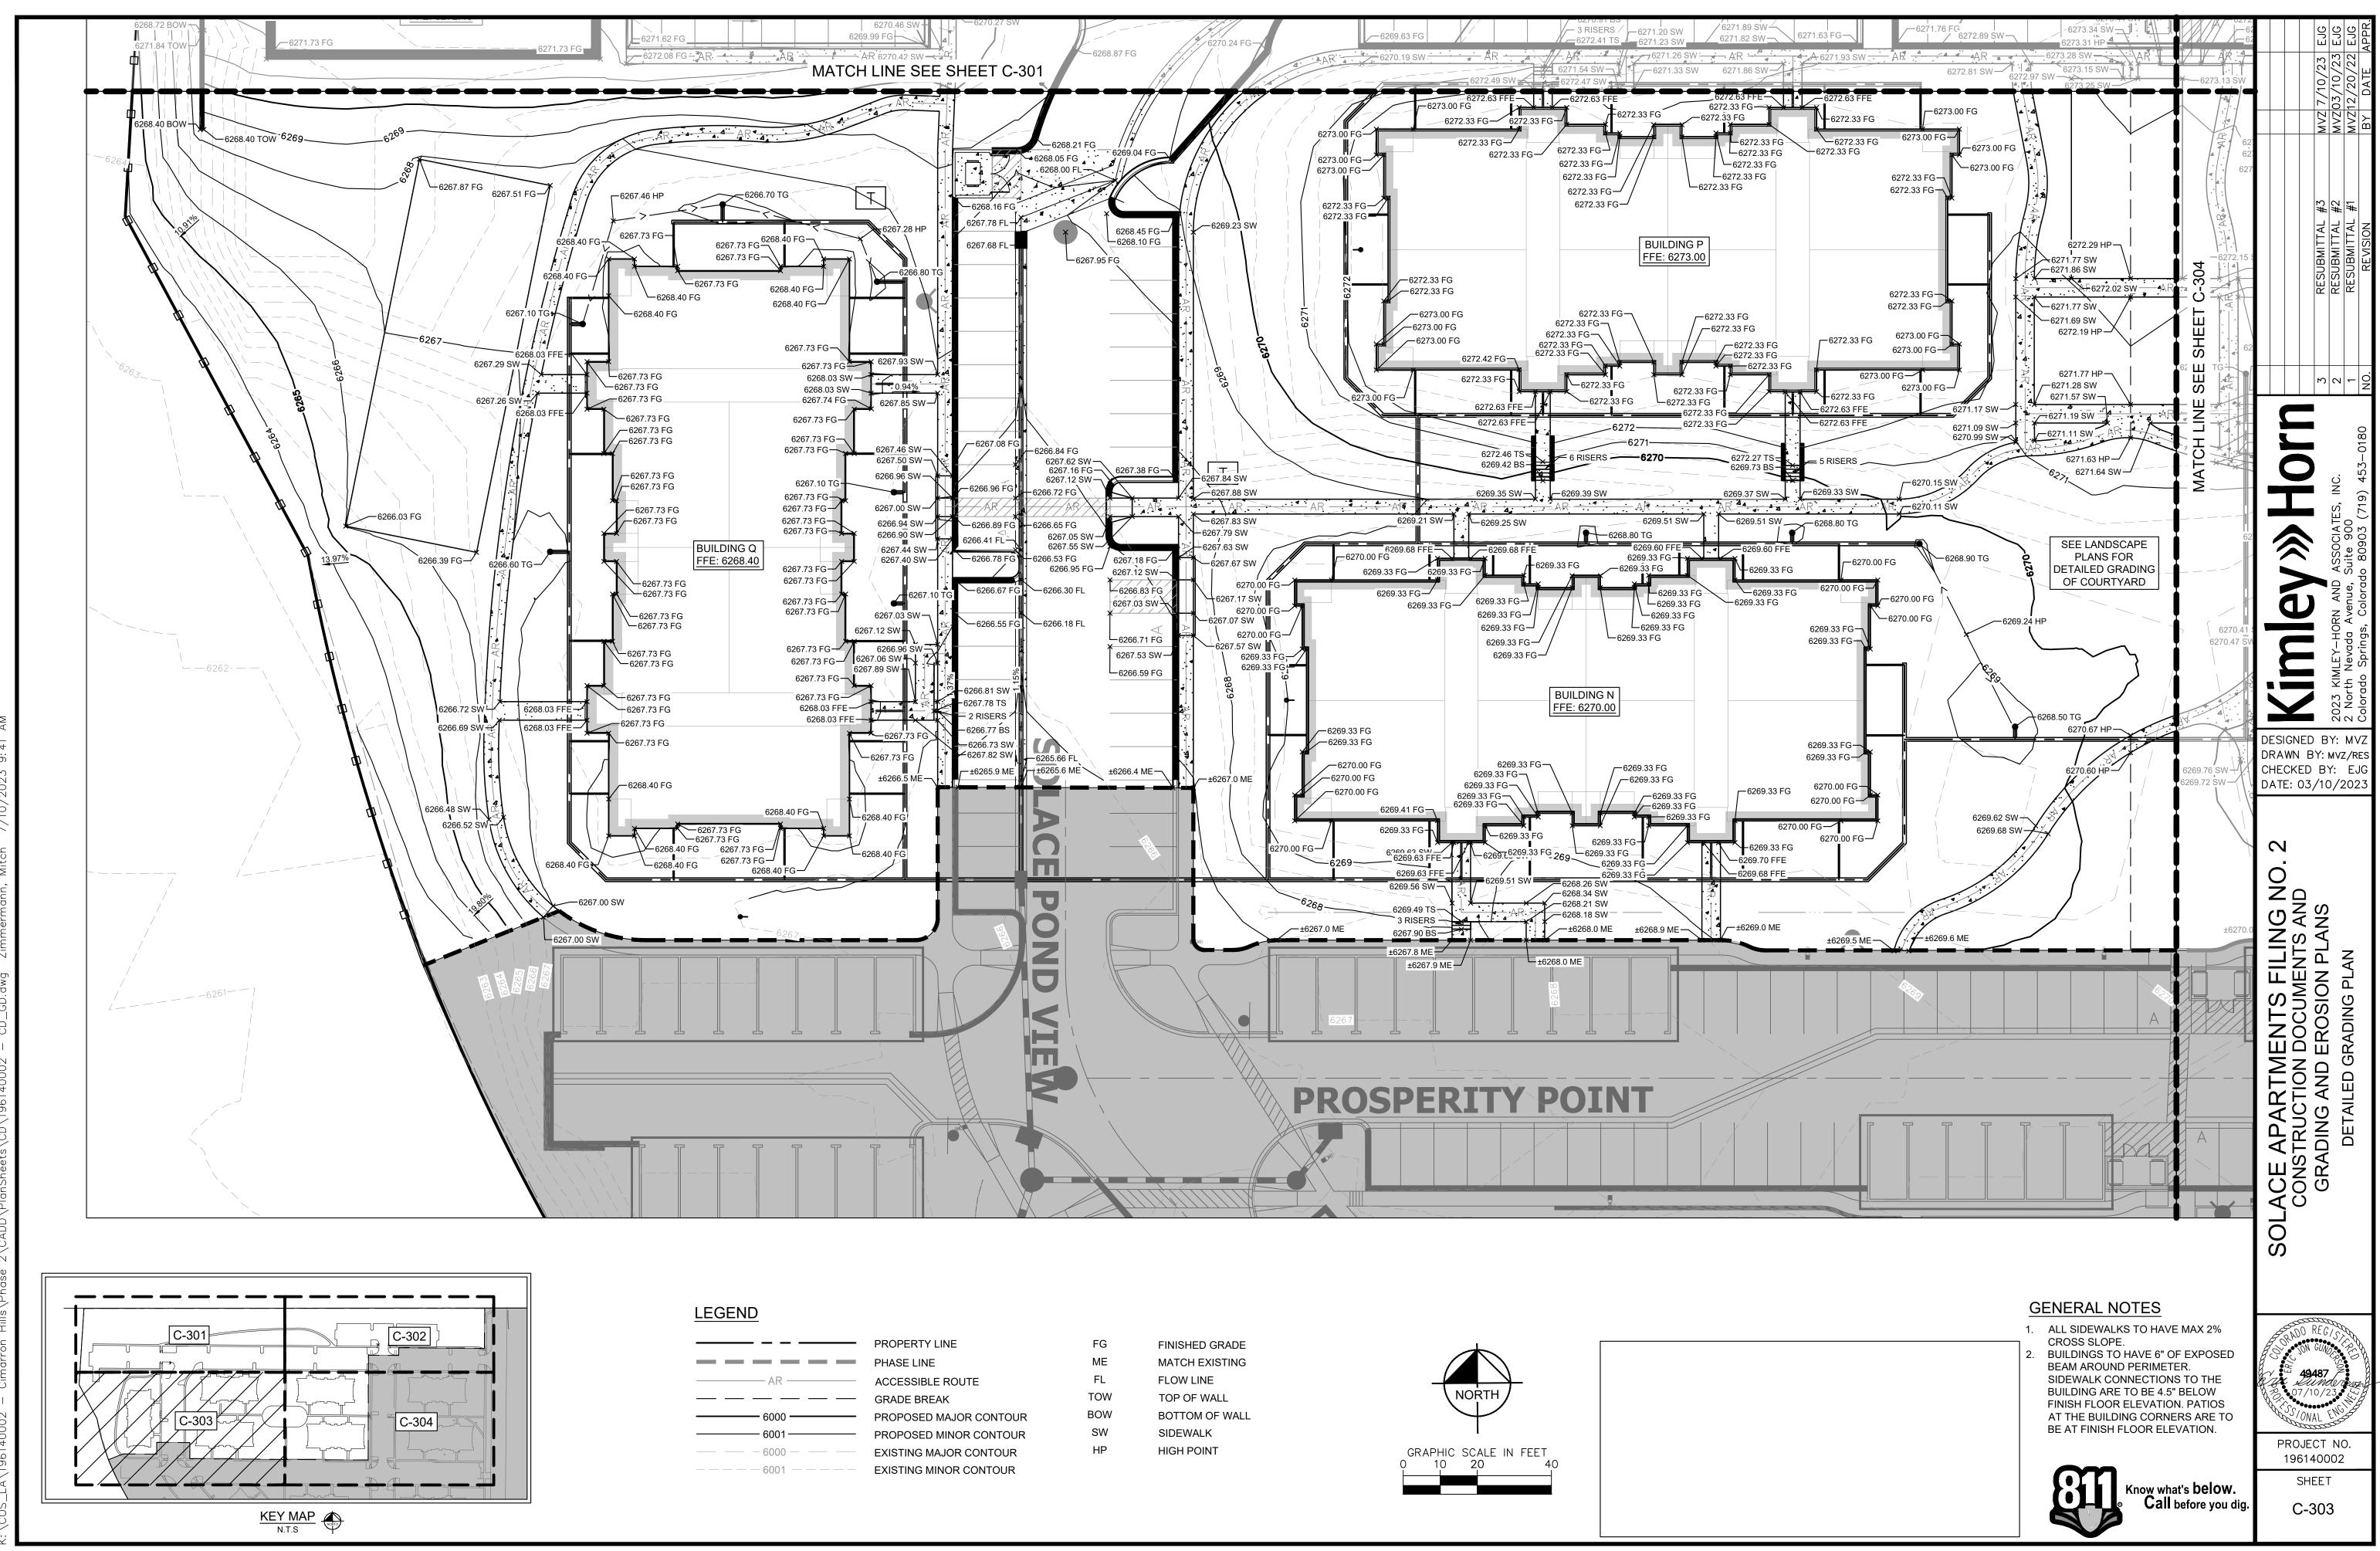


	PROPERTY LINE
	PHASE LINE
	ACCESSIBLE ROUTE
	GRADE BREAK
_	PROPOSED MAJOR CO
	PROPOSED MINOR CO
	EXISTING MAJOR CON
	EXISTING MINOR CON

FG
ME
FL
TOW
BOW
SW
HP

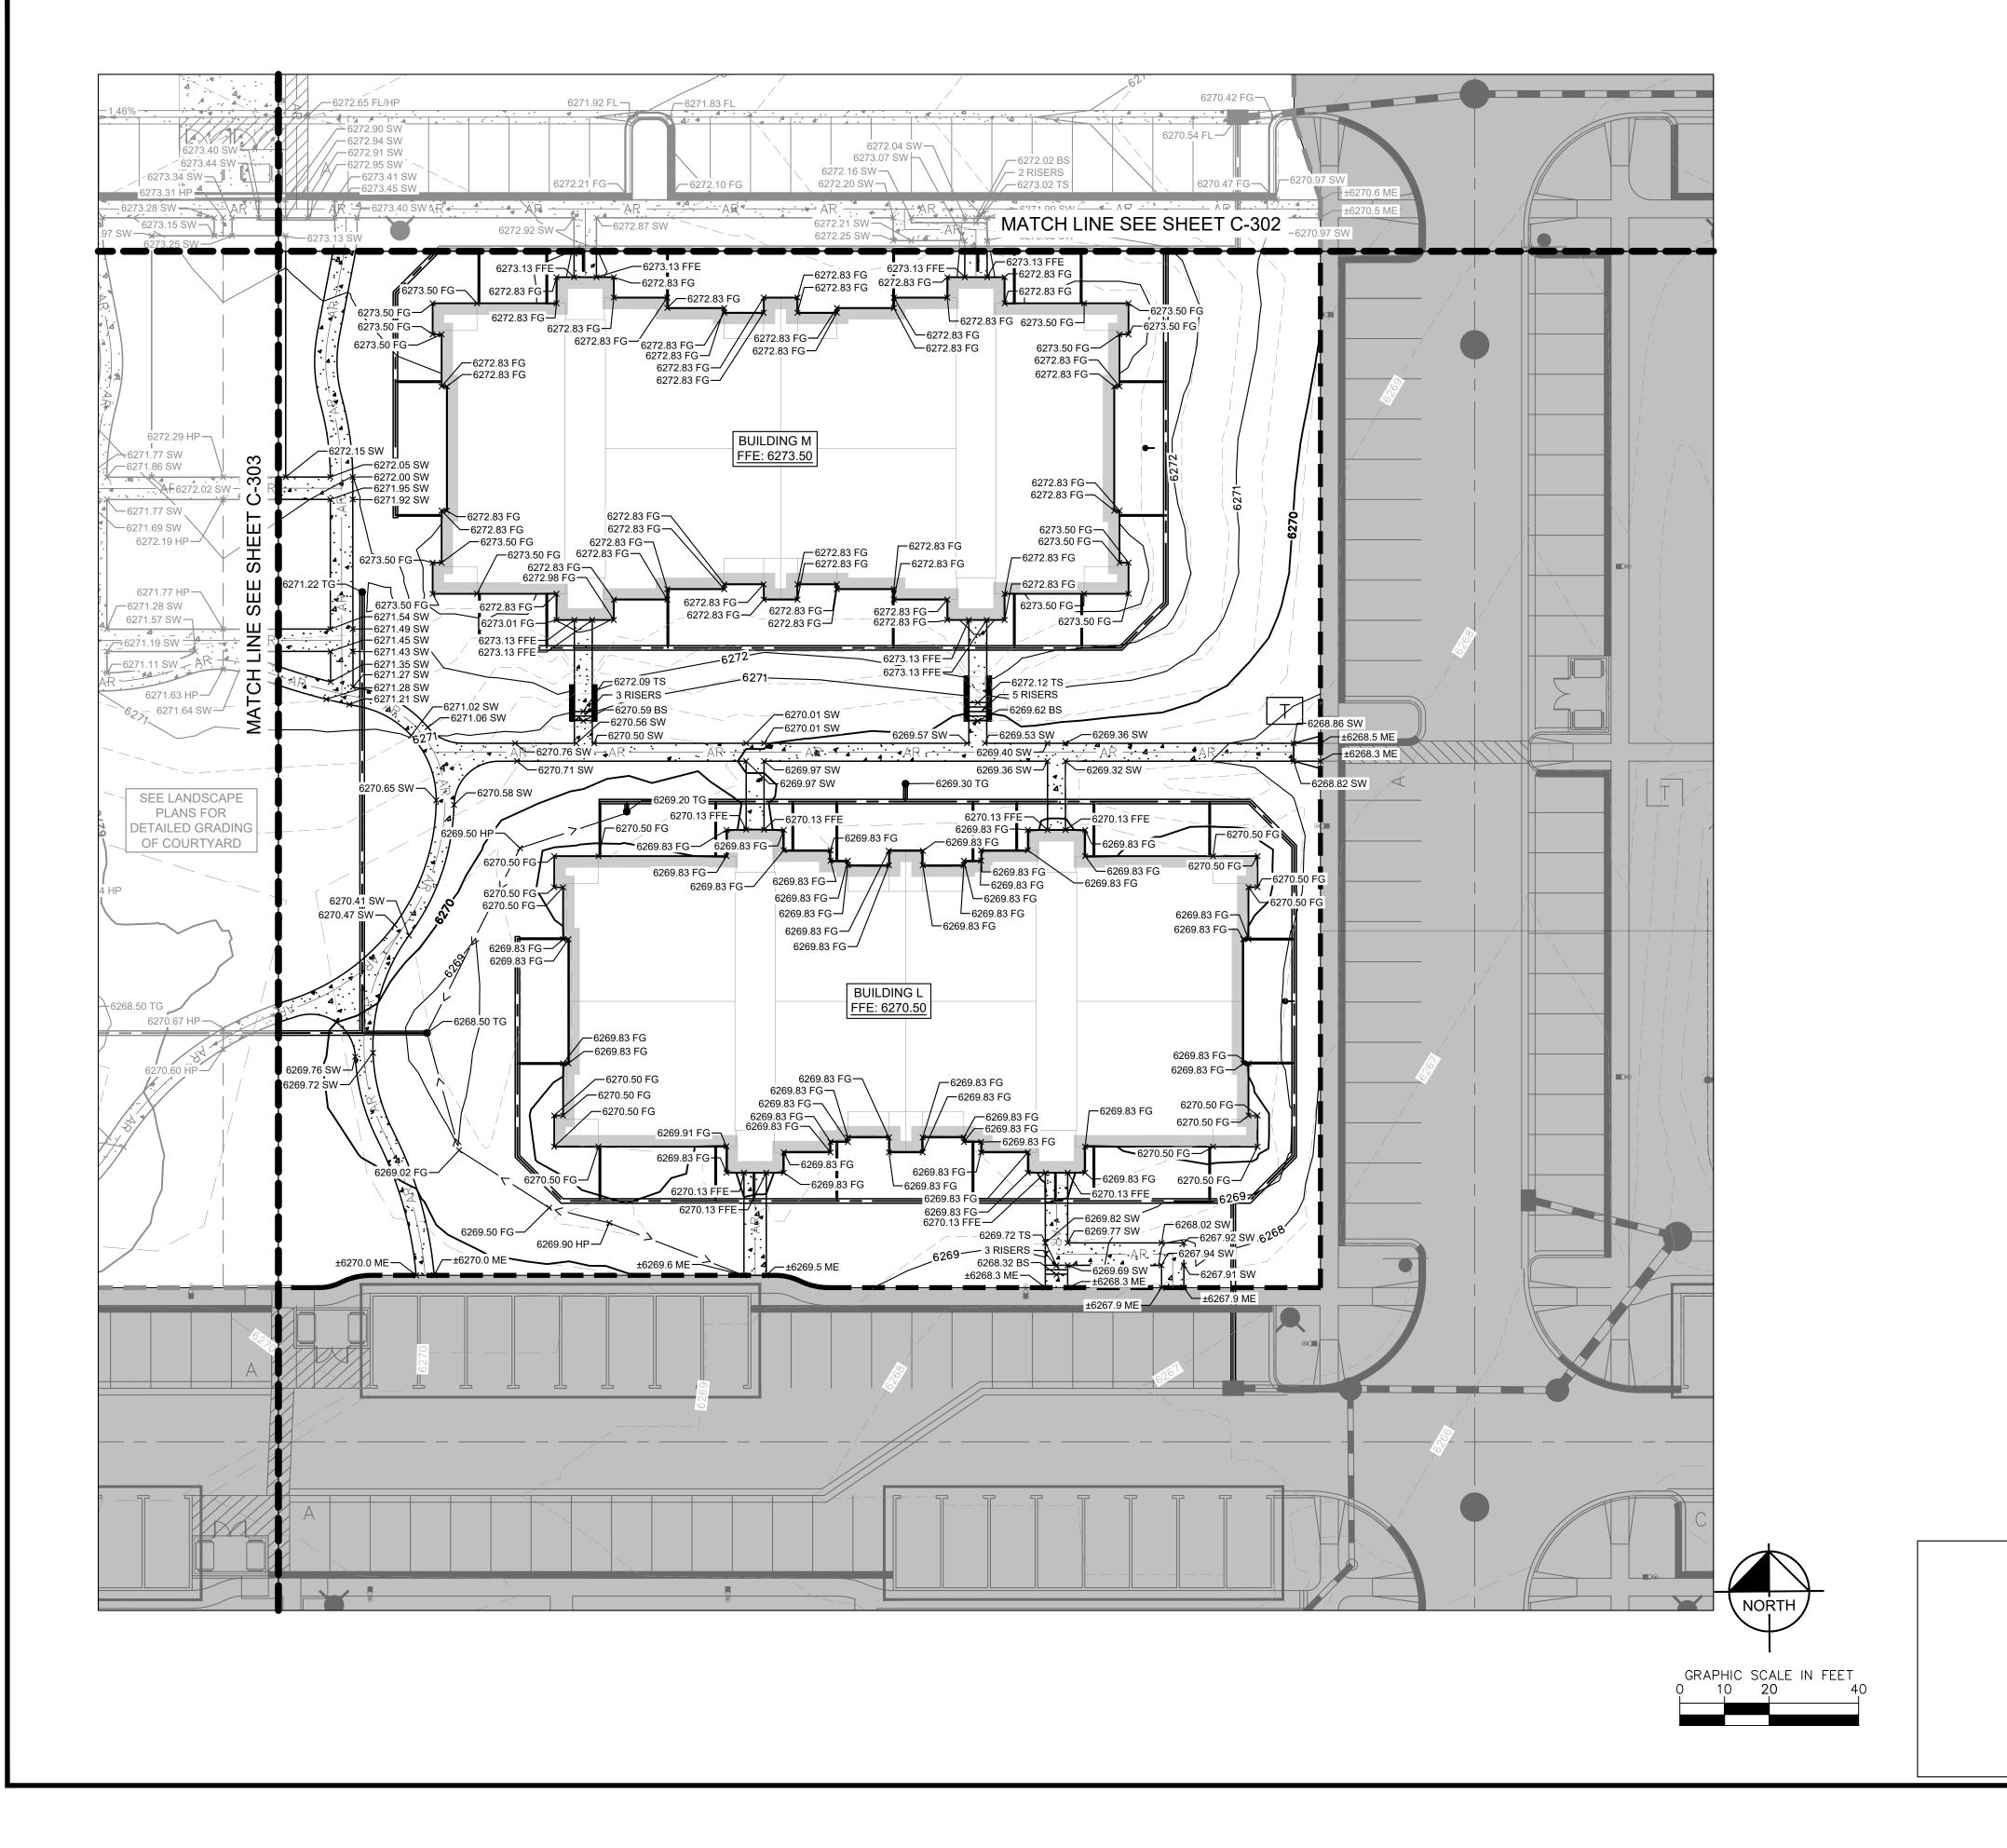

COS_LA\196140002 — Cimarron Hills\Phase 2\CADD\PlanSheets\CD\196140002 — CD_GD.dwg Zimmermann, Mitch 7/10/2023 9:41 A

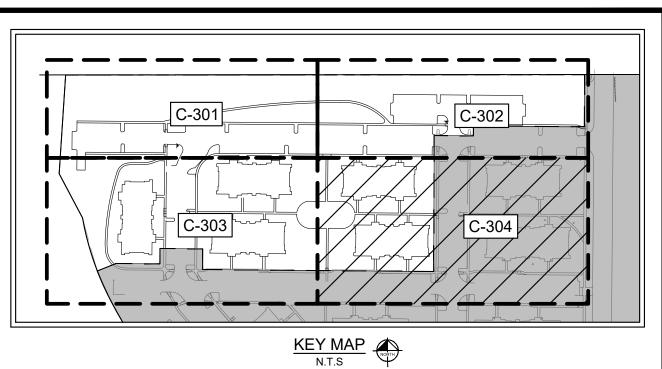

LEGEND

AR
6000
6001
— — 6000 — — —
6001
FG
ME
FL
TOW
BOW
SW
HP


PROPERTY LINE PHASE LINE ACCESSIBLE ROUTE GRADE BREAK PROPOSED MAJOR CONTOUR PROPOSED MINOR CONTOUR EXISTING MAJOR CONTOUR EXISTING MINOR CONTOUR


GENERAL NOTES

- 1. ALL SIDEWALKS TO HAVE MAX 2% CROSS SLOPE.
- 2. BUILDINGS TO HAVE 6" OF EXPOSED BEAM AROUND PERIMETER. SIDEWALK CONNECTIONS TO THE BUILDING ARE TO BE 4.5" BELOW FINISH FLOOR ELEVATION. PATIOS AT THE BUILDING CORNERS ARE TO BE AT FINISH FLOOR ELEVATION.




Know what's **below.** ◎ Call before you dig.

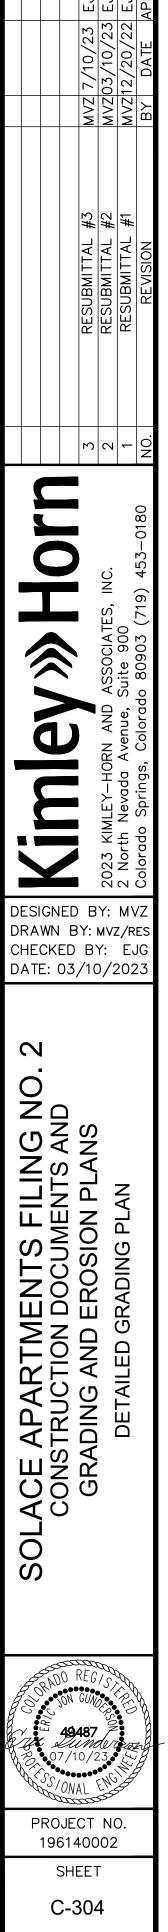


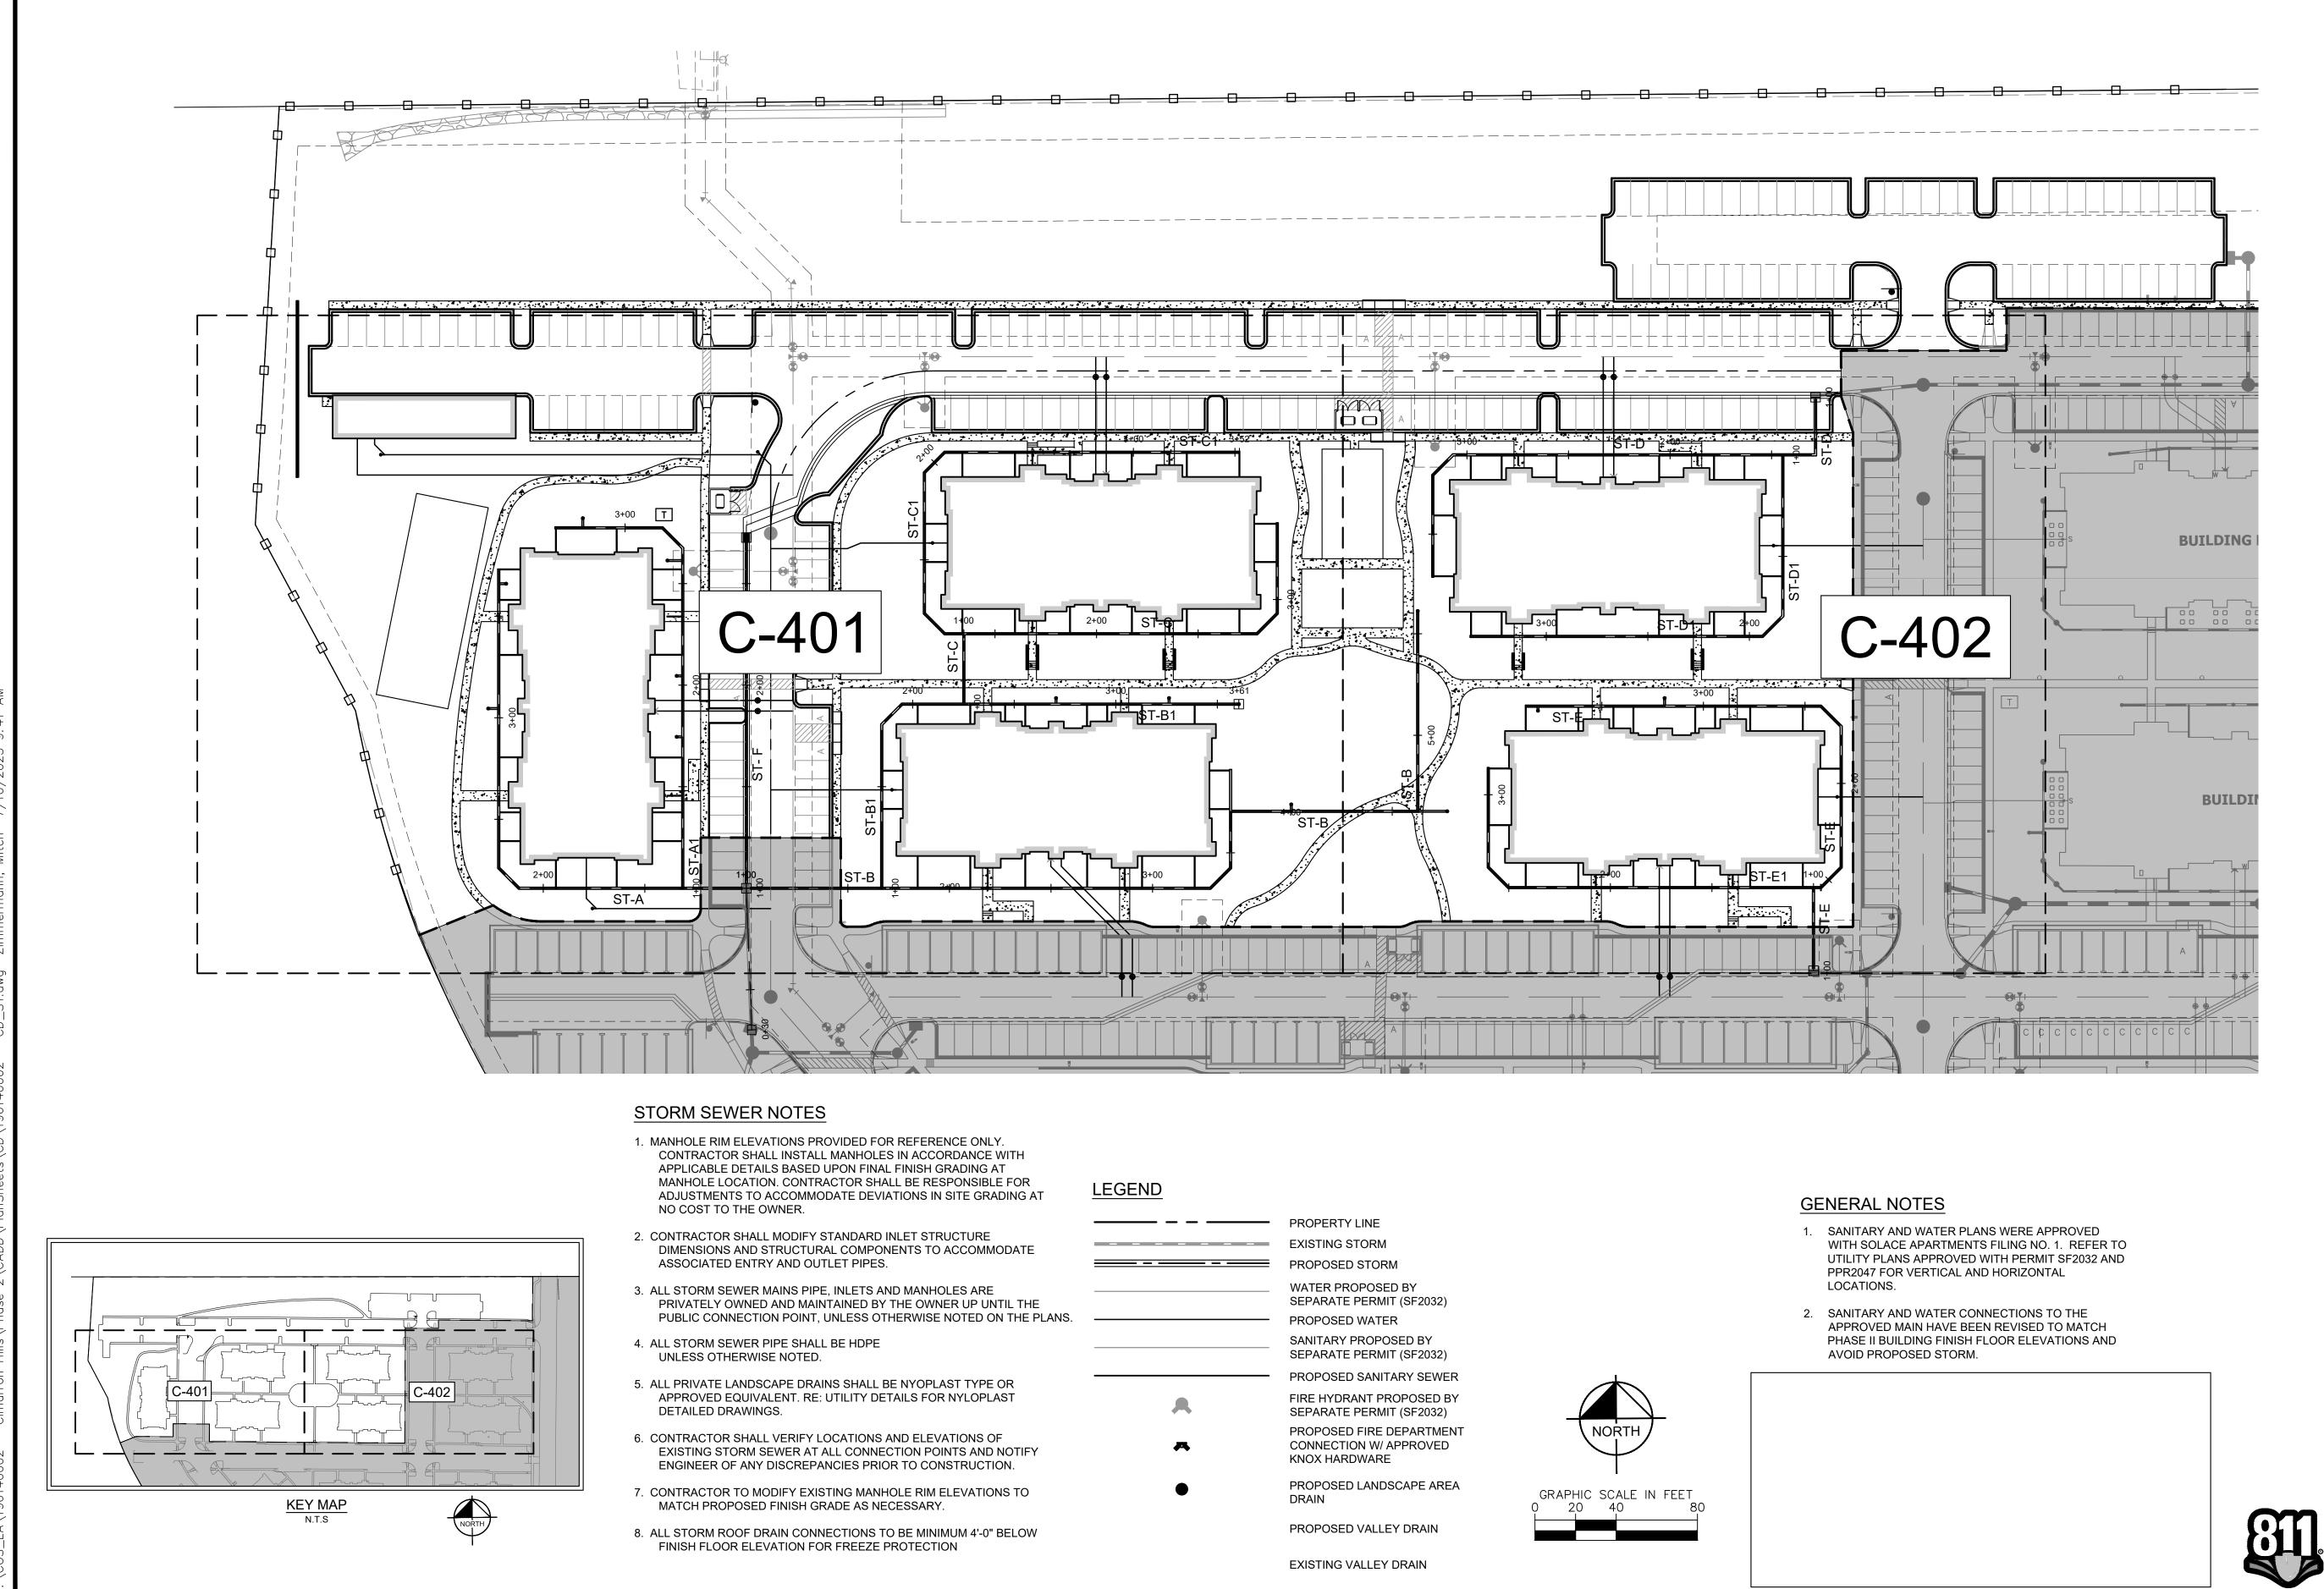


EFERENCE ONLY. NACCORDANCE WITH NISH GRADING AT BE RESPONSIBLE FOR ONS IN SITE GRADING AT	LEGEND			GENERAL NOT
		PROPERTY LINE		
ET STRUCTURE ITS TO ACCOMMODATE		EXISTING STORM		1. SANITARY AND V WITH SOLACE AF
TS TO ACCOMMODATE		PROPOSED STORM		
MANHOLES ARE E OWNER UP UNTIL THE		WATER PROPOSED BY SEPARATE PERMIT (SF2032)		PPR2047 FOR VE LOCATIONS.
RWISE NOTED ON THE PLANS.		PROPOSED WATER		2. SANITARY AND V APPROVED MAIN
		SANITARY PROPOSED BY SEPARATE PERMIT (SF2032)		PHASE II BUILDIN AVOID PROPOSE
NYOPLAST TYPE OR		PROPOSED SANITARY SEWER	—	
LS FOR NYLOPLAST	A	FIRE HYDRANT PROPOSED BY SEPARATE PERMIT (SF2032)		
D ELEVATIONS OF ON POINTS AND NOTIFY FO CONSTRUCTION.	A	PROPOSED FIRE DEPARTMENT CONNECTION W/ APPROVED KNOX HARDWARE	NORTH	
E RIM ELEVATIONS TO SSARY.	•	PROPOSED LANDSCAPE AREA DRAIN	GRAPHIC SCALE IN FEET 0 20 40 80	
E MINIMUM 4'-0" BELOW DTECTION		PROPOSED VALLEY DRAIN		
		EXISTING VALLEY DRAIN		

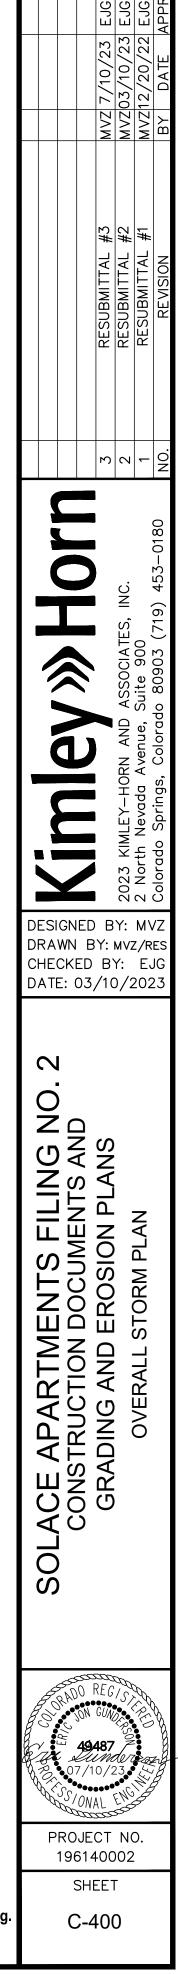


Know what's **below.** ◎ Call before you dig.

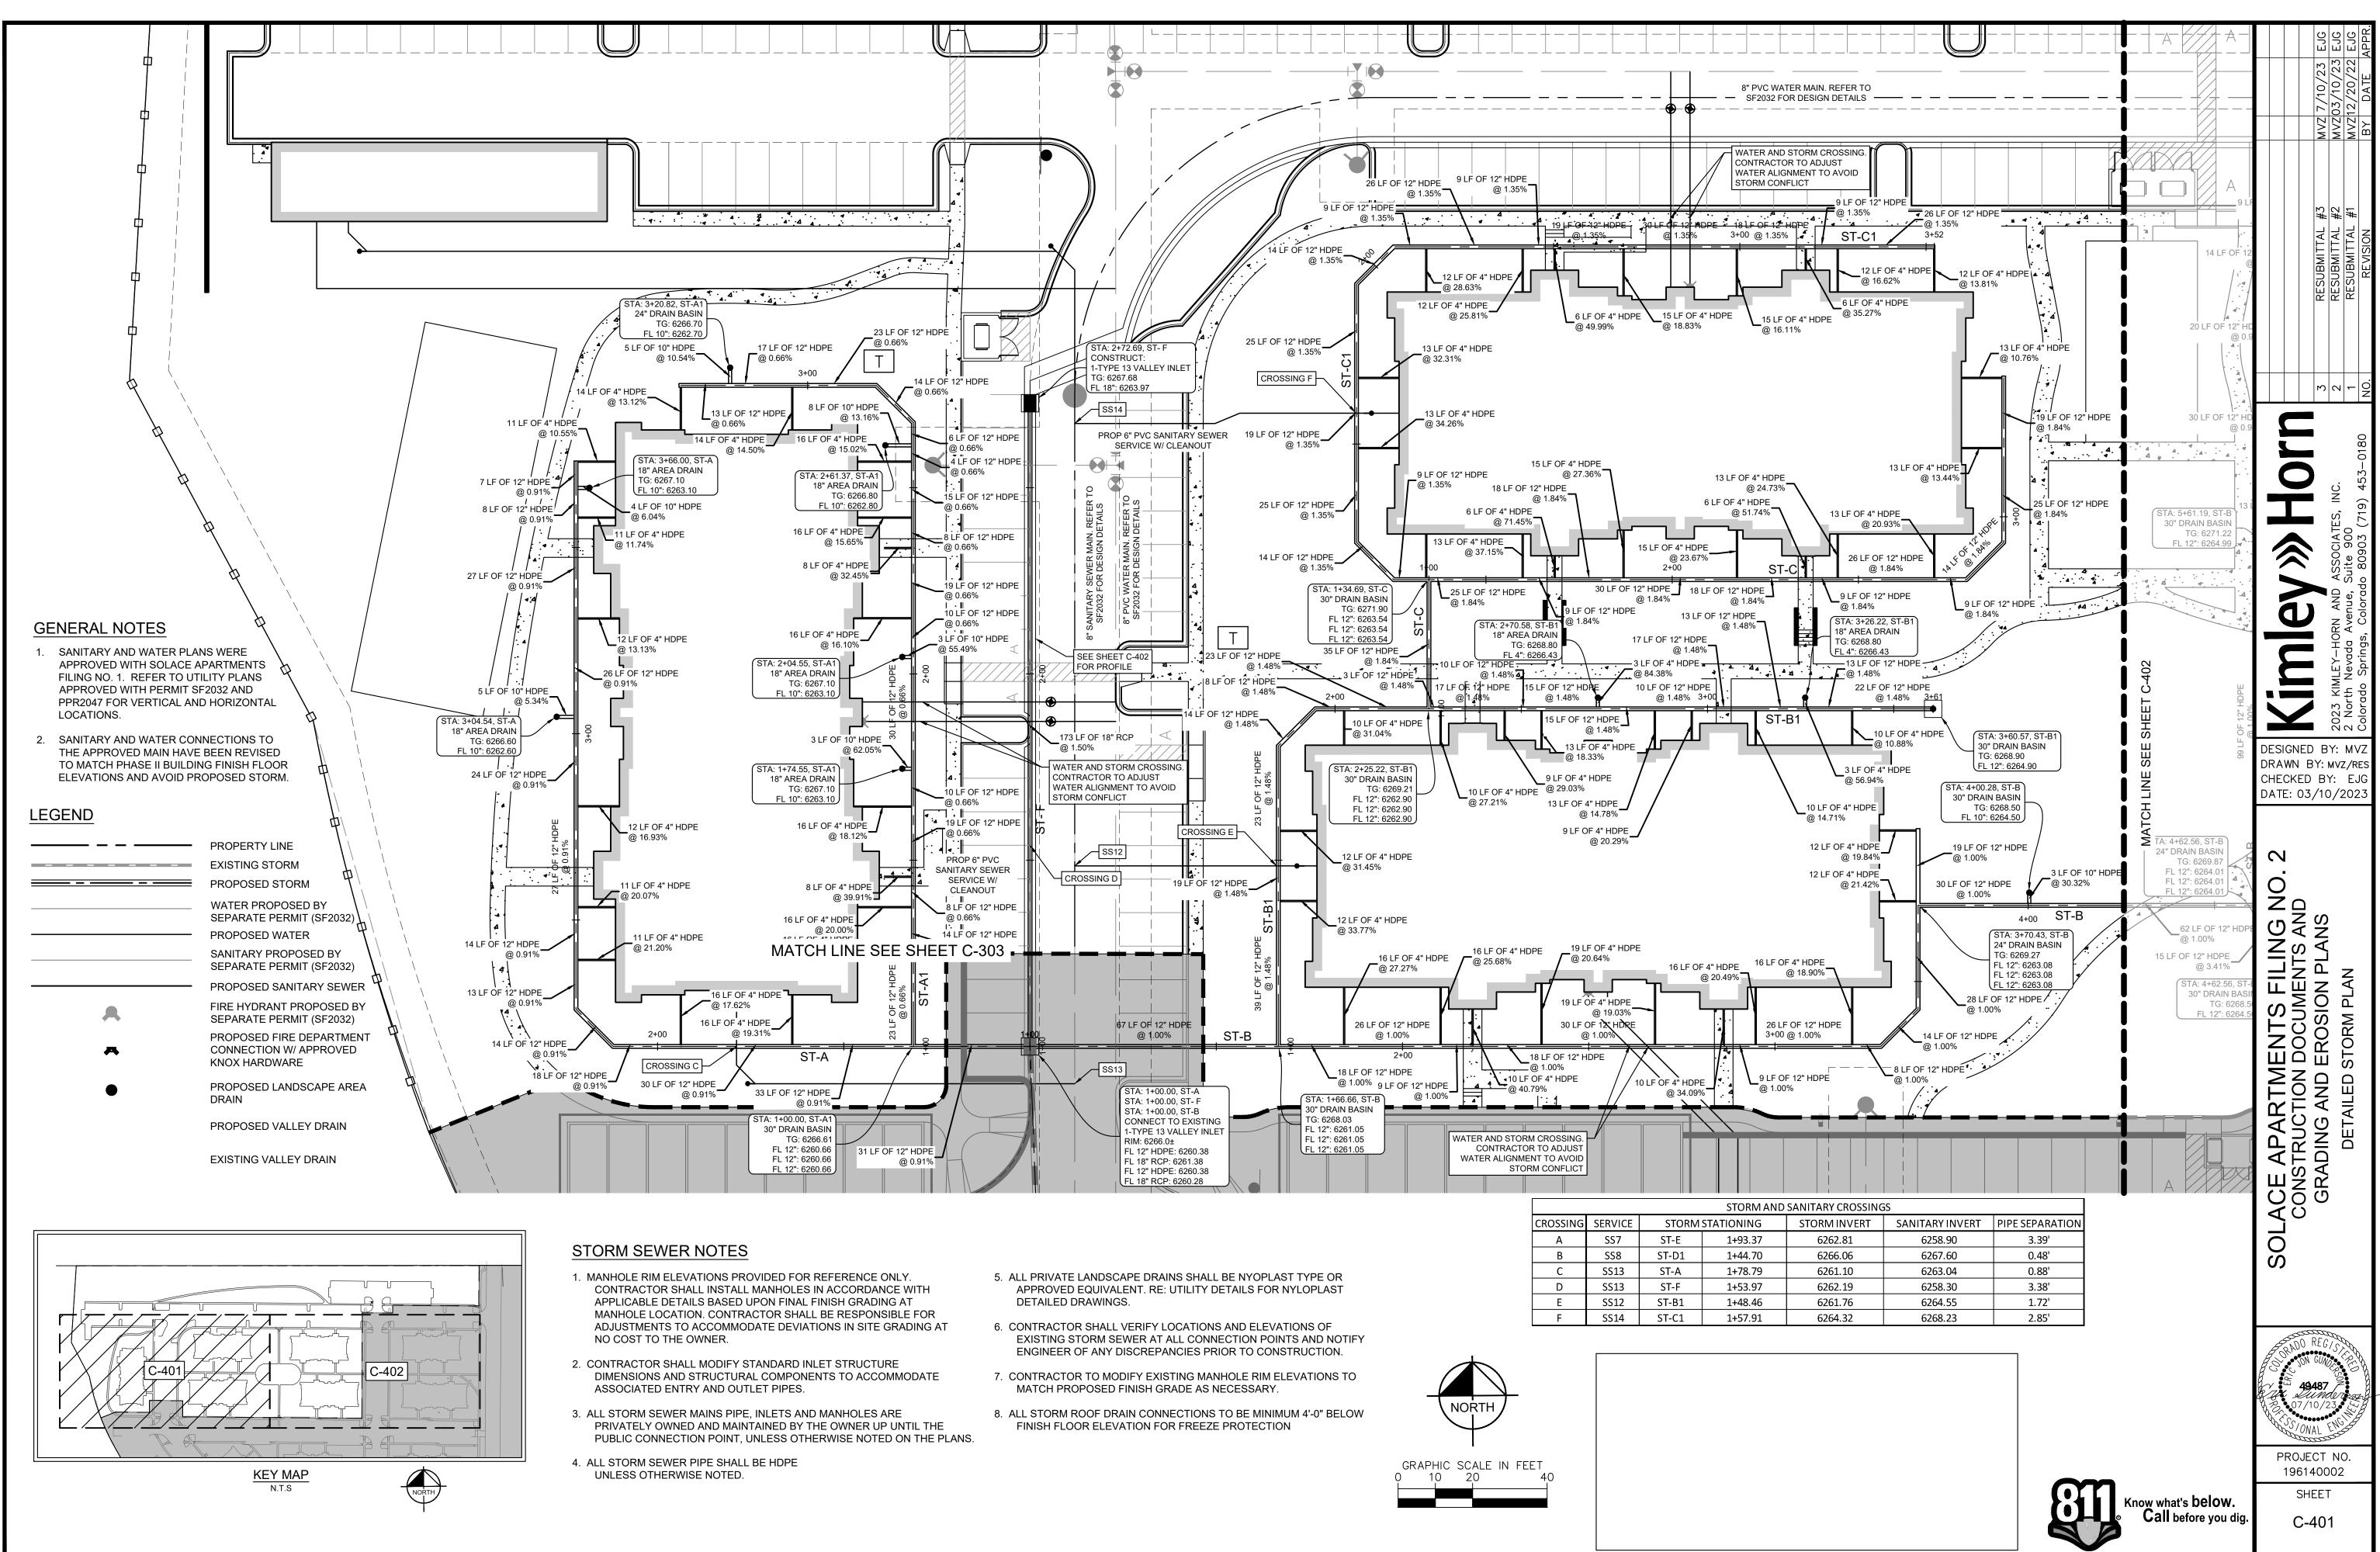


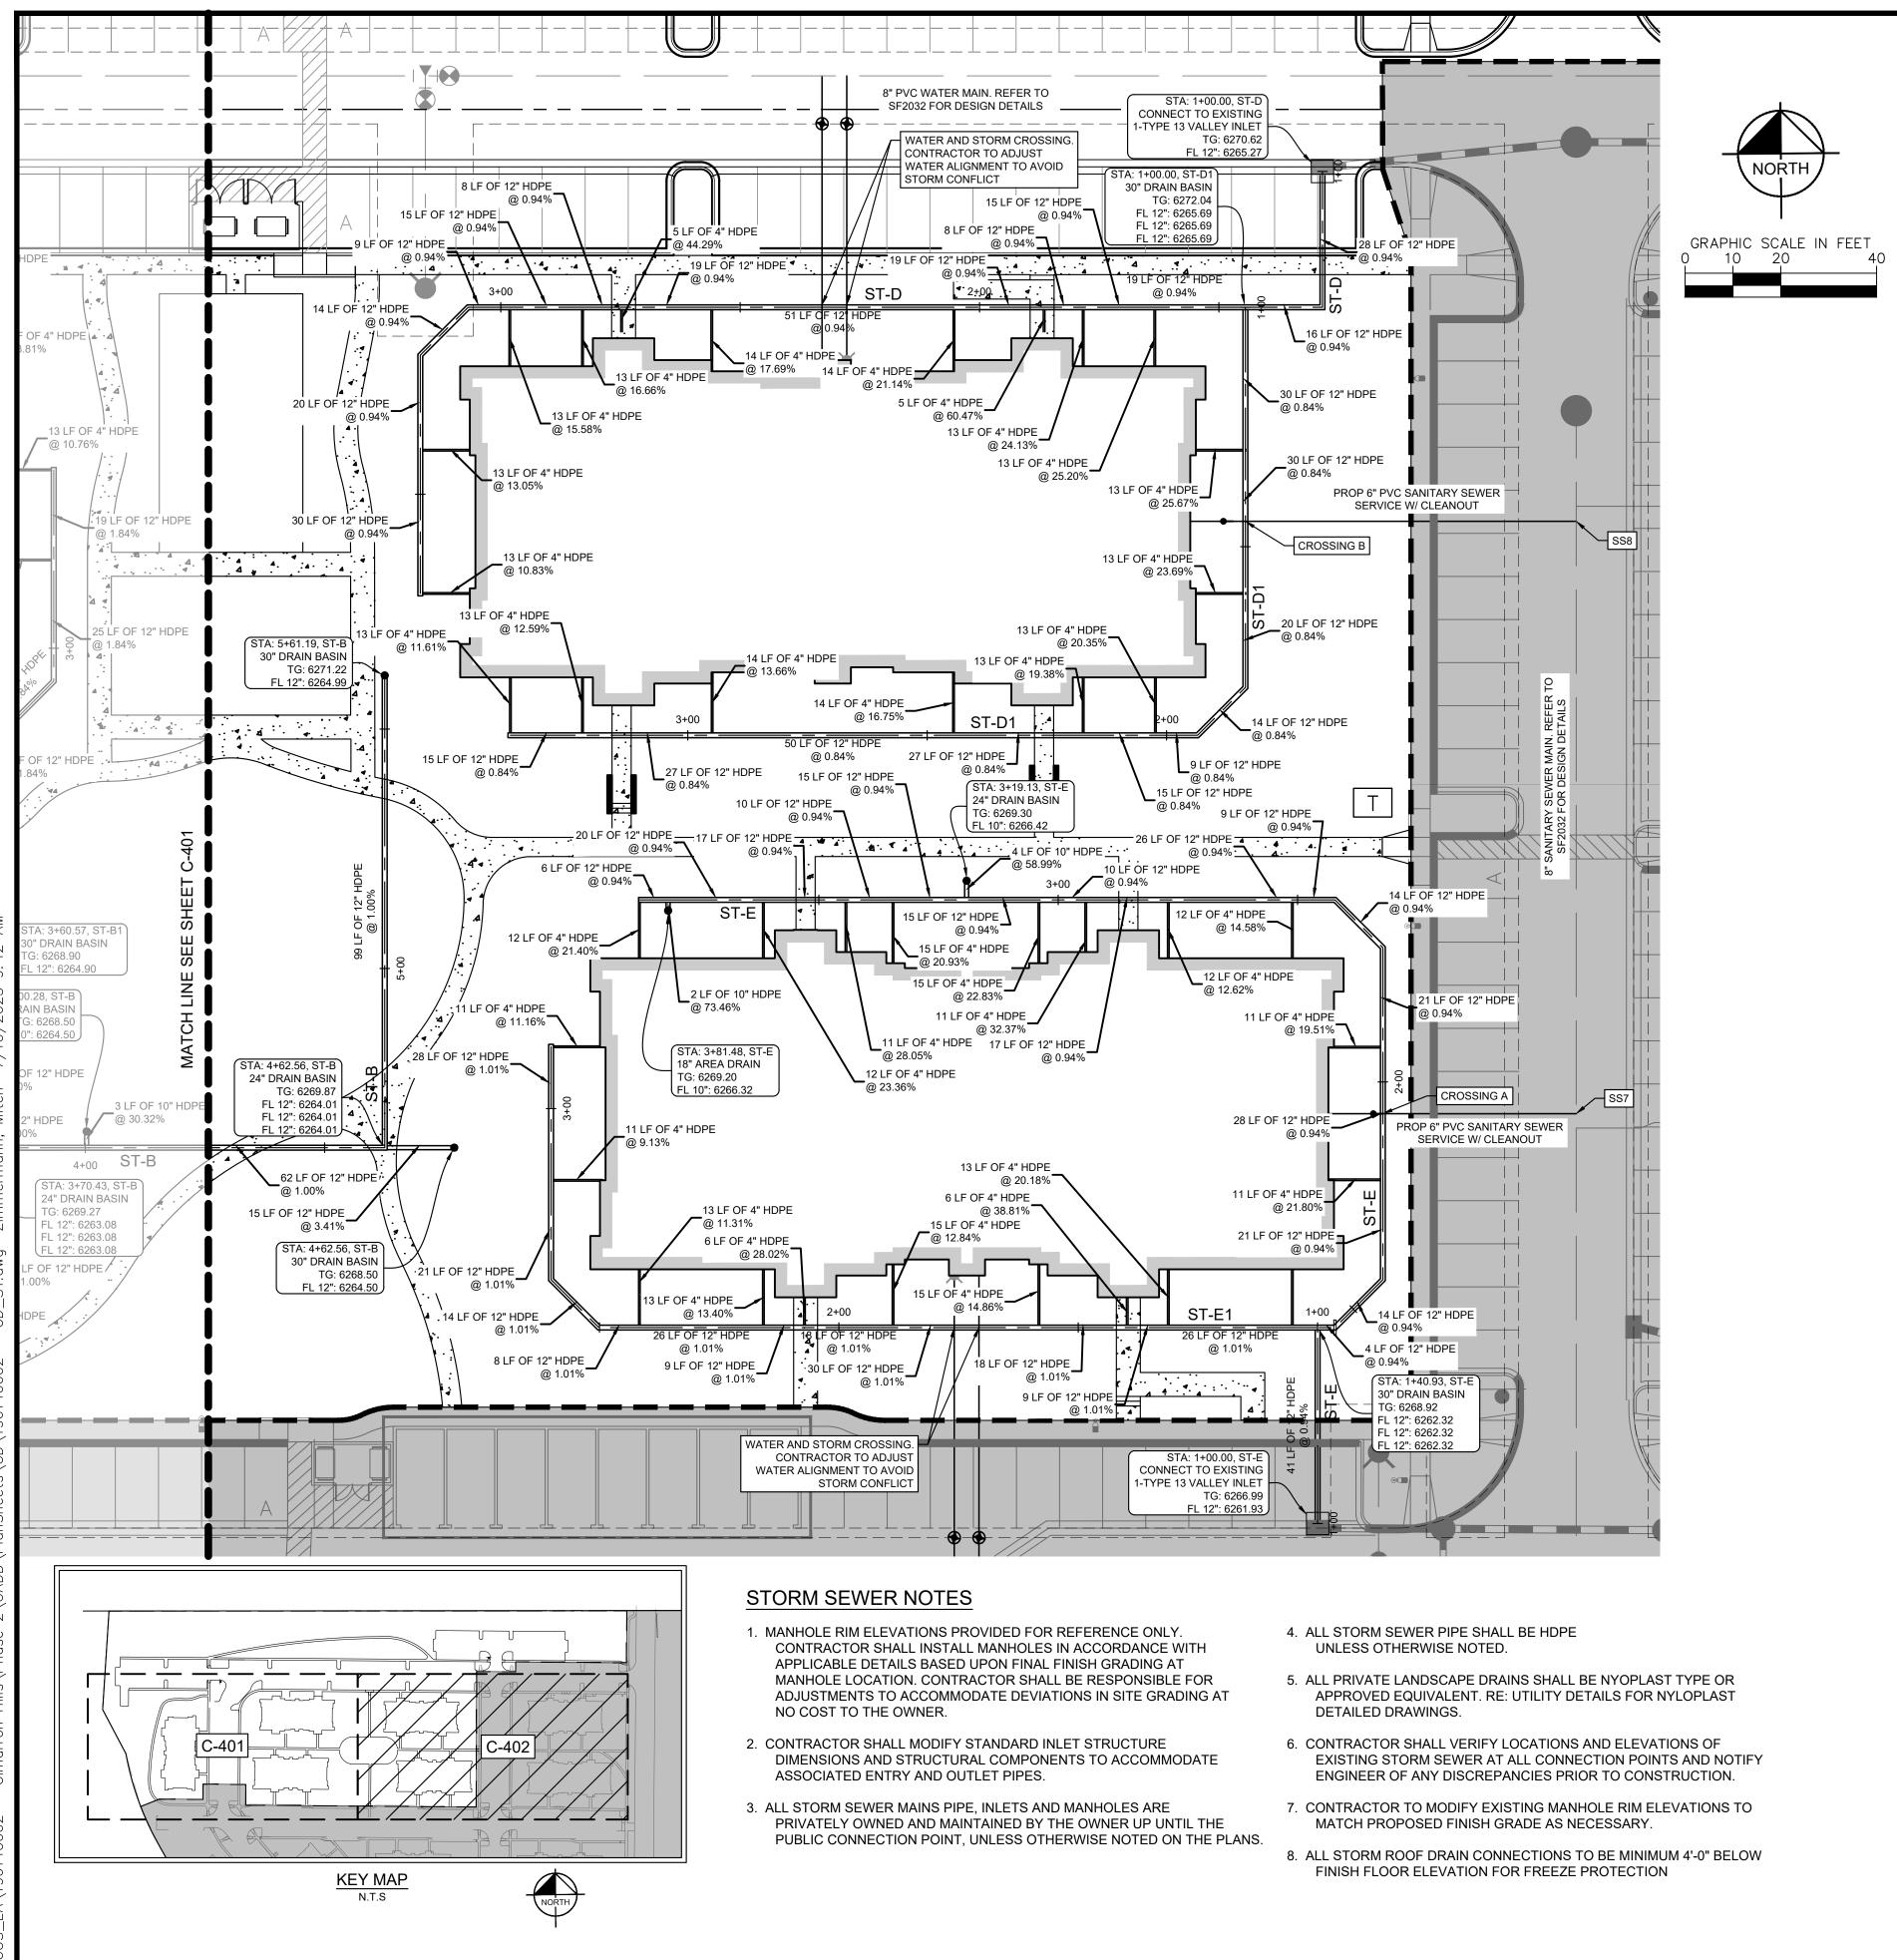

GENERAL NOTES

- 1. SANITARY AND WATER PLANS WERE APPROVED WITH SOLACE APARTMENTS FILING NO. 1. REFER TO UTILITY PLANS APPROVED WITH PERMIT SF2032 AND PPR2047 FOR VERTICAL AND HORIZONTAL LOCATIONS.
- 2. SANITARY AND WATER CONNECTIONS TO THE APPROVED MAIN HAVE BEEN REVISED TO MATCH PHASE II BUILDING FINISH FLOOR ELEVATIONS AND AVOID PROPOSED STORM.

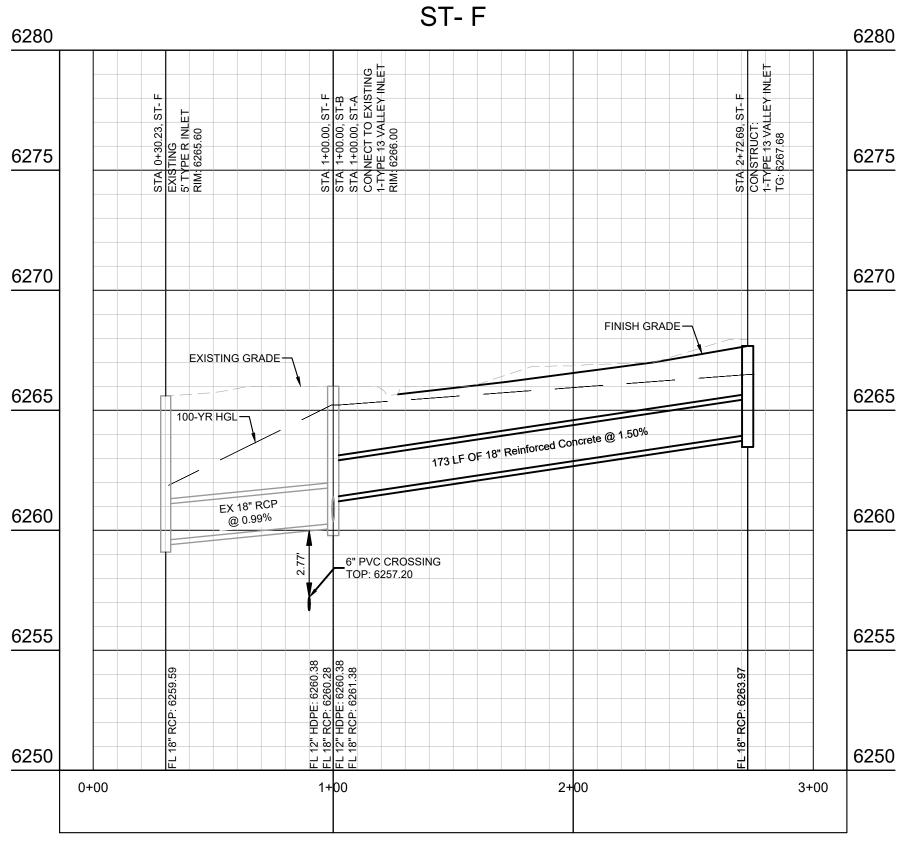

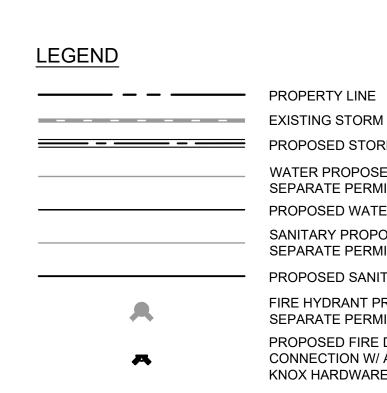



PROPOSED STORM WATER PROPOSED BY SEPARATE PERMIT (SF2032) PROPOSED WATER SANITARY PROPOSED BY SEPARATE PERMIT (SF2032) PROPOSED SANITARY SEWER FIRE HYDRANT PROPOSED BY SEPARATE PERMIT (SF2032) PROPOSED FIRE DEPARTMENT CONNECTION W/ APPROVED KNOX HARDWARE

PROPOSED LANDSCAPE AREA DRAIN

PROPOSED VALLEY DRAIN


EXISTING VALLEY DRAIN










	MVZ 7/10/23 EJG	MVZ03/10/23 EJG	MVZ12/20/22 EJG	BY DATE APPR.
	RESUBMITTAL #3	RESUBMITTAL #2	RESUBMITTAL #1	REVISION
	м	2	-	NO.
LIOH (* A) DESIGNET DRAWN E CHECKED DATE: 03	3Y:) B`	Y:	M\ z/r E.	es JG
SOLACE APARTMENTS FILING NO. 2 CONSTRUCTION DOCUMENTS AND GRADING AND EROSION PLANS DETAILED STORM PLAN				
	REG GUN	BIS SEPSON	S C REV	Proceeding and a second



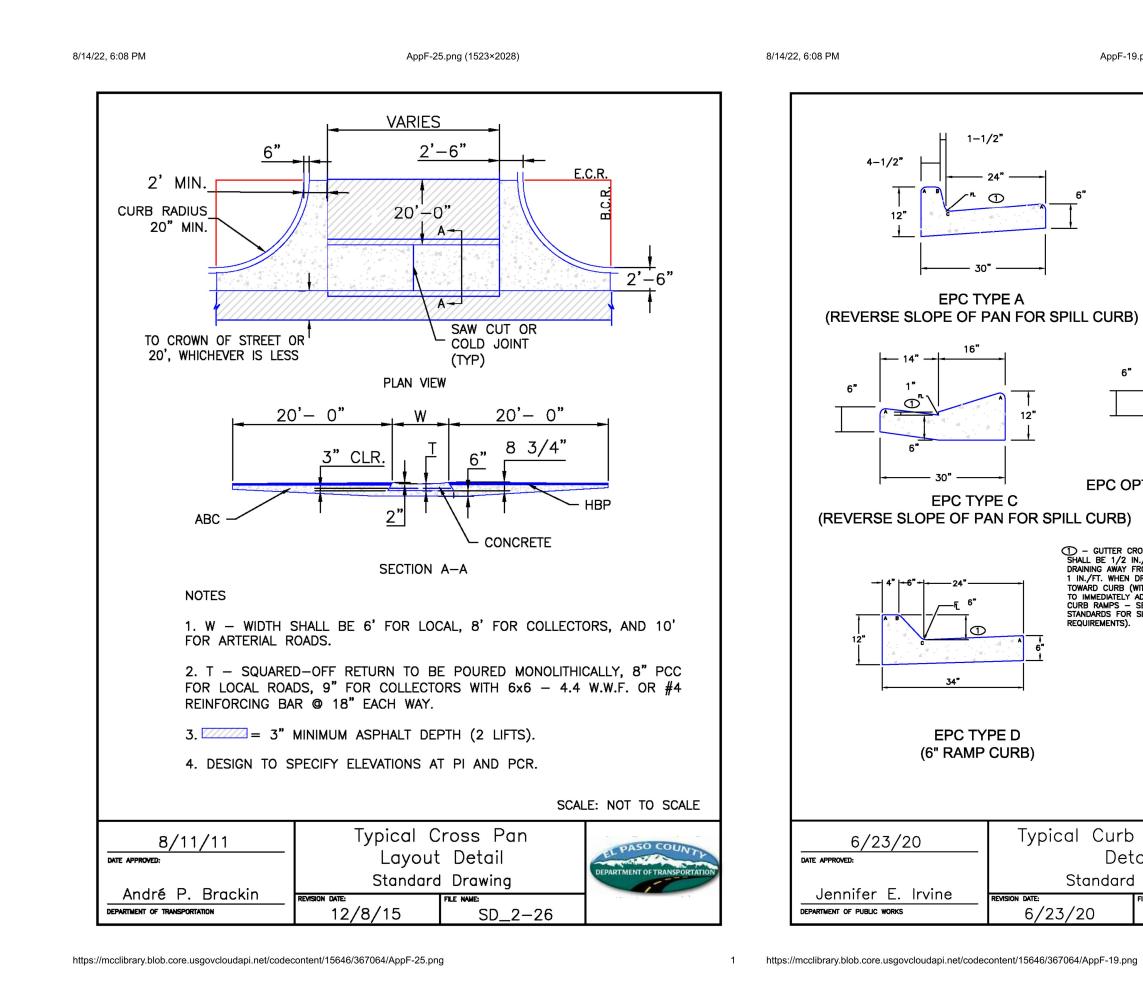





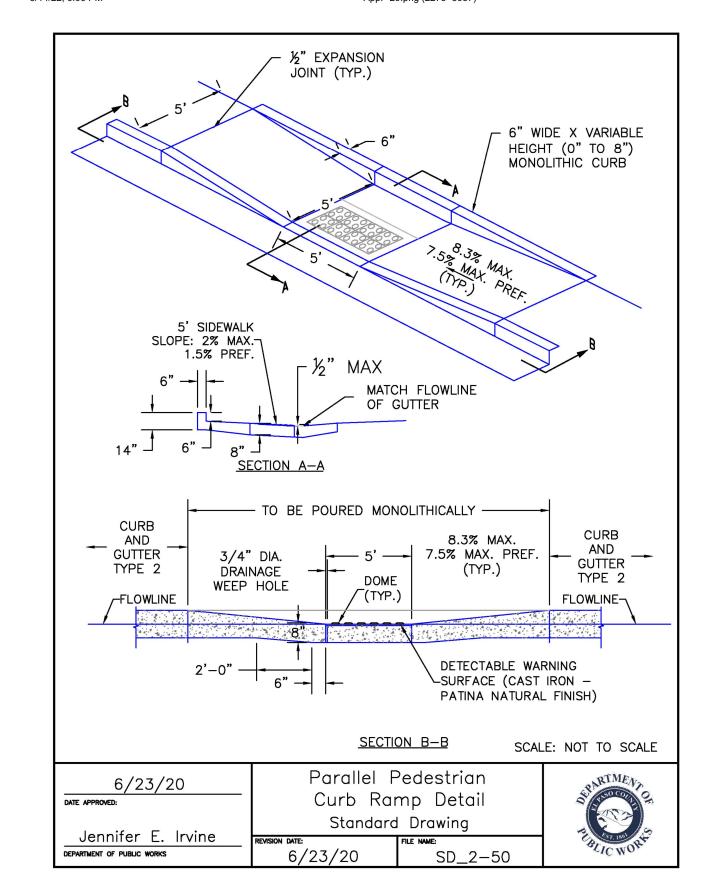


8/14/22, 6:07 PM - TOOL JOINT (TYP) 1.5% PREF. W=SAME WIDTH AS THE APPROACHING SIDEWALK. BUT NOT LESS THAN 4.0 FEET PEDESTRIAN RAMP NOTES ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE CURRENT ENGINEERING CRITERIA MANUAL AND ADA REQUIREMENTS. . CONTRACTOR TO NOTIFY ENGINEERING DIVISION INSPECTION STAFF 48 HOURS PRIOR TO CONCRETE PLACEMENT. . PEDESTRIAN CURB RAMP CONSTRUCTION SHALL BE A MINIMUM 4,500 PSI CONCRETE, MINIMUM 4" THICK, NON-COLORED, NON-SCORED, COARSE BROOM FINISH. PEDESTRIAN CURB RAMP LOCATION AND LENGTH MAY REQUIRE MODIFICATION TO MAINTAIN THE 8.3% MAXIMUM RUNNING RAMP SLOPE DUE TO STREET INTERSECTION GRADES AND/OR ALIGNMENTS. SEE ECM SECTION 6.3.6 FOR PEDESTRIAN PUSHBUTTON LOCATION REQUIREMENTS. 5. DETECTABLE WARNING SURFACE SHALL START A MINIMUM OF 6" BUT NOT MORE THAN 8" FROM THE FLOWLINE OF THE CURB AT ANY POINT. DETECTABLE WARNING SURFACE SHALL BE PREFABRICATED, CAST IRON (PATINA NATURAL FINISH) AND IN ACCORDANCE WITH ECM CHAPTER 6 AND SD_2-42. THERMOPLASTIC TRUNCATED DOMES AND PAVERS WILL NOT BE ACCEPTED. . THE DETECTABLE WARNING SURFACE SHALL BE 24" IN LENGTH AND THE FULL WIDTH OF THE RAMP. 8. PEDESTRIAN CURB RAMP WIDTH REQUIRED IS SAME AS APPROACHING SIDEWALK; 4' MINIMUM. 9. ALL PEDESTRIAN CURB RAMPS WILL BE PERPENDICULAR TO TRAFFIC WITH THE EXCEPTION OF MID-BLOCK OR TERMINAL RAMPS WHICH MAY BE PARALLEL SUBJECT TO APPROVAL. 0. DRAINAGE STRUCTURES, TRAFFIC SIGNAL/SIGNAGE, UTILITIES/JUNCTION BOXES, OR OTHER OBSTRUCTIONS WITHIN PROPOSED PEDESTRIAN CURB RAMP AREAS AND LANDINGS ARE PROHIBITED. 11. THE COUNTER SLOPE OF THE GUTTER OR ROAD AT THE FOOT OF A RAMP SHALL NOT EXCEED 5%. 6/23/20 DATE APPROVED: Jennifer E. Irvine

DEPARTMENT OF PUBLIC WORKS

https://mcclibrary.blob.core.usgovcloudapi.net/codecontent/15646/367064/AppF-29.png

1/1




8/14/22, 6:07 PM


AppF-28.png (2160×2849)

-0.9"-1.4"

ELEVATION VIEW


THE TOP DIAMETER OF THE TRUNCATED DOMES SHALL BE 50%-65% OF THE BASE DIAMETER

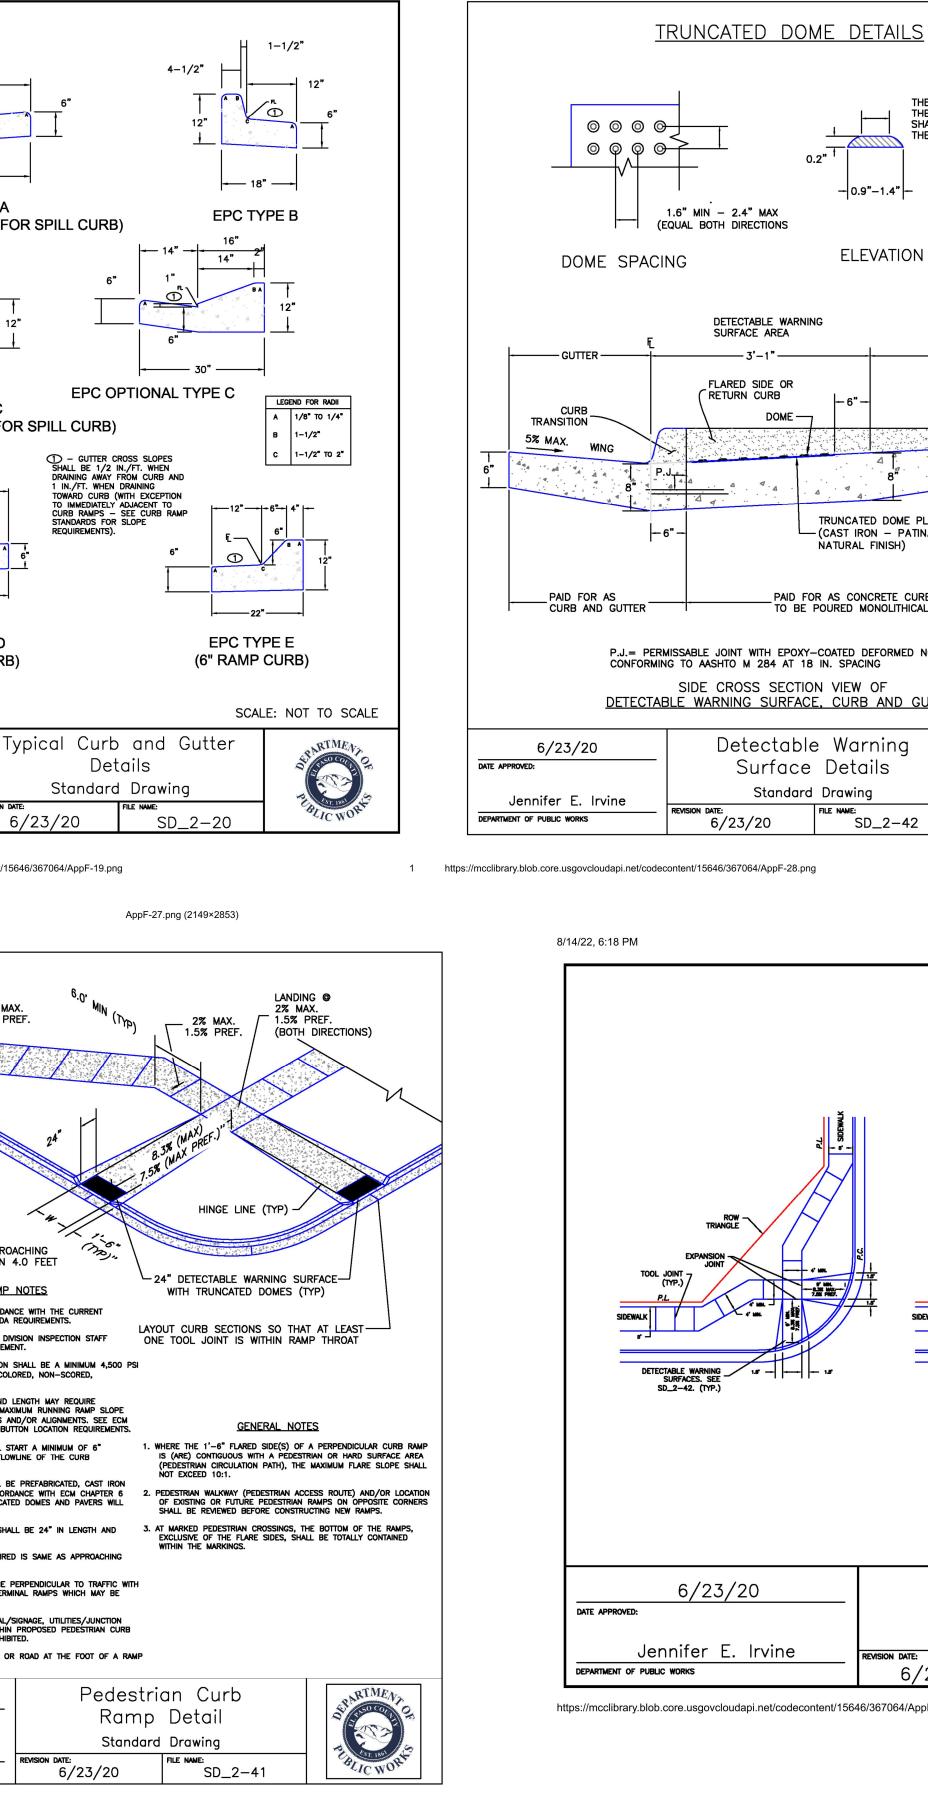


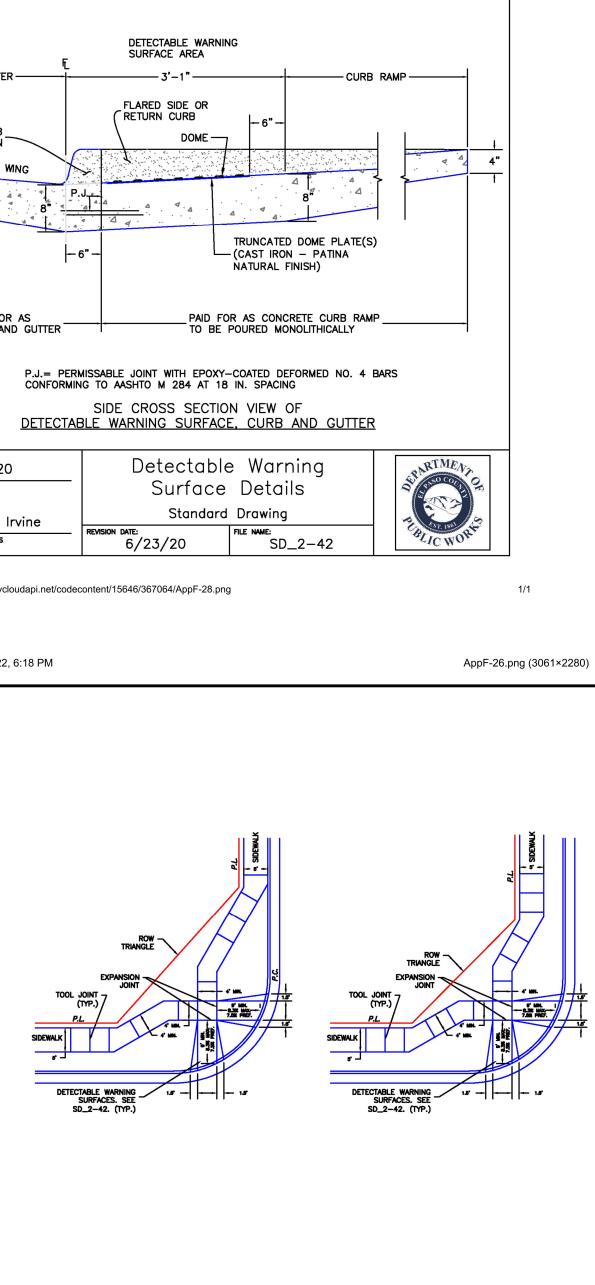

6/23/20	Pedestrian Curb		
DATE APPROVED:	Ramp	Detail	
lannifan E. Invina	Standard Drawing		
Jennifer E. Irvine	REVISION DATE:	FILE NAME:	
DEPARTMENT OF PUBLIC WORKS	6/23/20	SD_2-40	

https://mcclibrary.blob.core.usgovcloudapi.net/codecontent/15646/367064/AppF-26.png

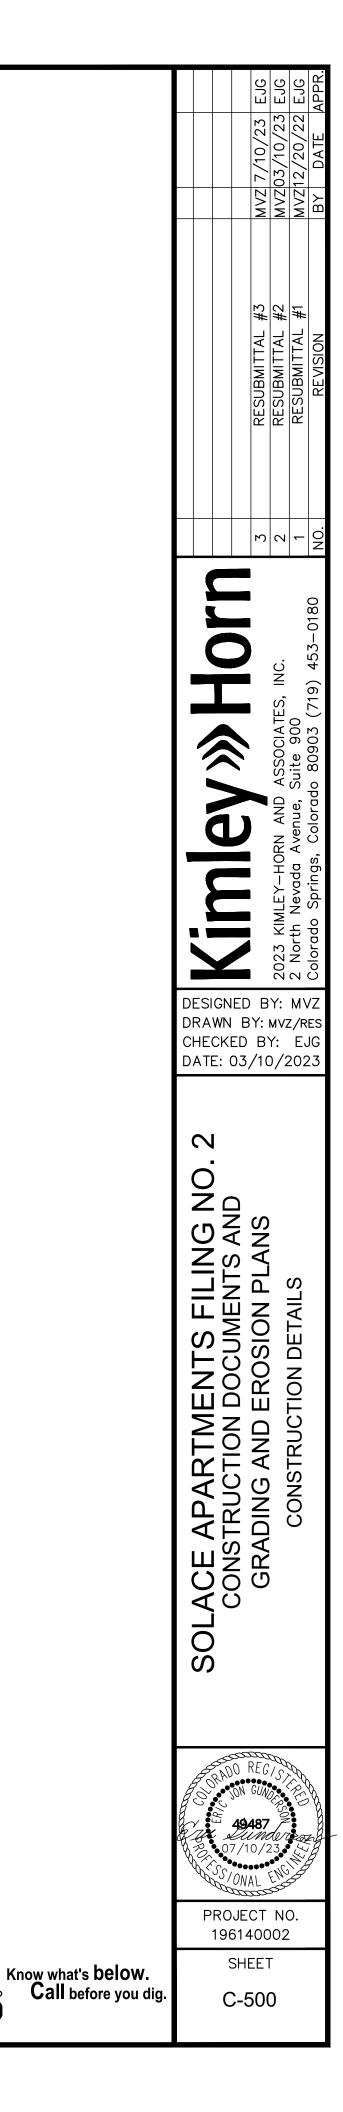

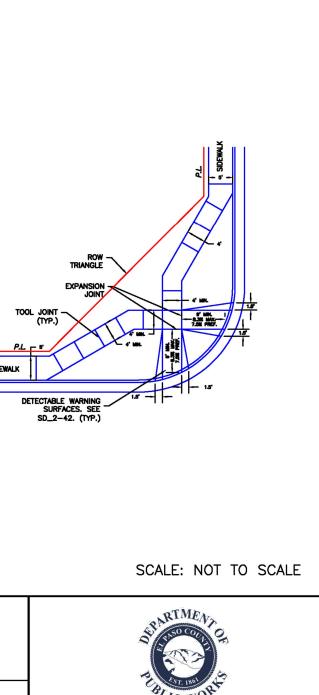


1/1

SOLACE APARTMENTS FILING NO. 2

A PORTION OF SECTION 7, TOWNSHIP 14 SOUTH, RANGE 65 SEST OF THE P.M. EL PASO COUNTY, COLORADO

SANITARY AND WATER SERVICE PLANS

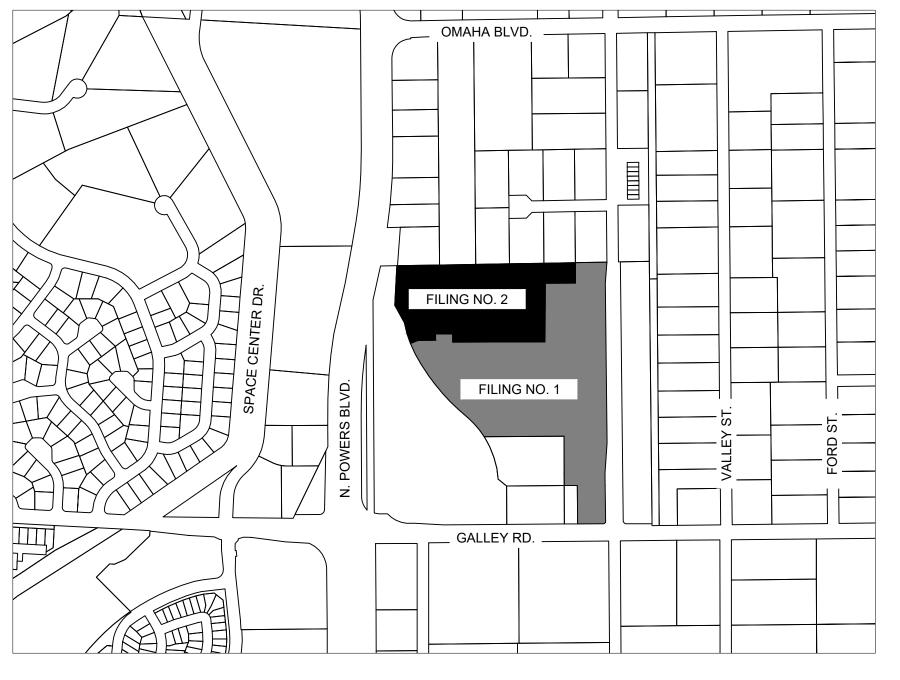

VICINITY MAP 1" = 500'

SHEET INDEX				
SHEET NO.	SHEET TITLE			
C600	UTILITY PLAN COVER SHEET			
C601	UTILITY PLAN NOTES			
C602	SANITARY SEWER SERVICE PLAN			
C603	WATER SERVICE PLAN			
C604	STANDARD DETAILS			

CONTACTS

OWNER CS POWERS & GALLEY LLC 510 S NEIL ST CHAMPAIGN, IL 61820 PHONE: (719) 216-2577

CIVIL ENGINEER: KIMLEY-HORN AND ASSOCIATES 2 N. NEVADA AVENUE SUITE 300 COLORADO SPRINGS, CO 80903 CONTACT: ERIC GUNDERSON PHONE: (719) 453-0182

Dane C DANE OLMSTEA

ENGINEER'S SIGNATURE BLOCK

THESE DETAILED PLANS AND SPECIFICATIONS WERE PREPARED UNDER MY DIRECTION AND SUPERVISION. SAID PLANS AND SPECIFICATIONS HAVE BEEN PREPARED ACCORDING TO THE CRITERIA ESTABLISHED BY THE COUNTY FOR DETAILED ROADWAY, DRAINAGE, GRADING AND EROSION CONTROL PLANS AND SPECIFICATIONS AND SAID PLANS AND SPECIFICATIONS ARE IN CONFORMITY WITH THE APPLICABLE MASTER DRAINAGE PLANS AND MASTER TRANSPORTATION PLANS. SAID PLANS AND SPECIFICATIONS MEET THE PURPOSES FOR WHICH THE PARTICULAR ROADWAY AND DRAINAGE FACILITIES ARE DESIGNED AND ARE CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I ACCEPT RESPONSIBILITY FOR ANY LIABILITY CAUSED BY ANY NEGLIGENT ACTS, ERRORS OR OMISSIONS ON MY PART IN PREPARATION OF THE DETAILED PLANS AND SPECIFICATIONS



EL PASO COUNTY REVIEW STATEMENT

AMENDED.

IN ACCORDANCE WITH ECM SECTION 1.12, THESE CONSTRUCTION DOCUMENTS WILL BE VALID FOR CONSTRUCTION FOR A PERIOD OF 2 YEARS FROM THE DATE SIGNED BY THE EL PASO COUNTY ENGINEER. IF CONSTRUCTION HAS NOT STARTED WITHIN THOSE 2 YEARS, THE PLANS WILL NEED TO BE RESUBMITTED FOR APPROVAL, INCLUDING PAYMENT OF REVIEW FEES AT THE PLANNING AND COMMUNITY DEVELOPMENT DIRECTORS DISCRETION.

JOSHUA PALME
COUNTY ENGIN

THE CHEROKEE METROPOLITAN DISTRICT RECOGNIZES THE DESIGN PROFESSIONAL OF RECORD AS THE LICENSED ENGINEER HAVING RESPONSIBILITY FOR THE SUBMITTED DESIGN AND THE DISTRICT HAS LIMITED ITS SCOPE OF REVIEW ACCORDINGLY. AS SUCH, THE APPROVAL GRANTED HEREIN IS FOR THE CONSTRUCTION OF THE FACILITIES AS REPRESENTED ON THESE DOCUMENTS. APPROVAL EXPIRES ONE (1) YEAR FROM THE DATE BELOW AND RESUBMITTAL OF THESE PLANS FOR REVIEW AND APPROVAL IS REQUIRED IF CONSTRUCTION DOES NOT BEGIN DURING THIS PERIOD.

APPROVED BY:_____

DATE:_____

CHEROKEE METROPOLITAN DISTRICT

WASTEWATER PLAN APPROVAL

THE CHEROKEE METROPOLITAN DISTRICT RECOGNIZES THE DESIGN PROFESSIONAL OF RECORD AS

THE LICENSED ENGINEER HAVING RESPONSIBILITY FOR THE SUBMITTED DESIGN AND THE DISTRICT

HAS LIMITED ITS SCOPE OF REVIEW ACCORDINGLY. AS SUCH, THE APPROVAL GRANTED HEREIN IS

FOR THE CONSTRUCTION OF THE FACILITIES AS REPRESENTED ON THESE DOCUMENTS. APPROVAL

EXPIRES ONE (1) YEAR FROM THE DATE BELOW AND RESUBMITTAL OF THESE PLANS FOR REVIEW

AND APPROVAL IS REQUIRED IF CONSTRUCTION DOES NOT BEGIN DURING THIS PERIOD.

CONTACT: DANE OLMSTEAD

<u>SURVEYOR:</u> JR ENGINEERING, LLC 5475 TECH CENTER DRIVE STE 235 COLORADO SPRINGS, CO 80919 TEL: 719-593-2593 CONTACT: DANIEL CLARK, P.E.

EL PASO COUNTY: EL PASO COUNTY PCD DEPARTMENT 2880 INTERNATIONAL CIRCLE, SUITE 110 COLORADO SPRINGS, CO 80910 PHONE: (719) 520-6300

DEVELOPER'S SIGNATURE BLOCK

I, THE OWNER/DEVELOPER HAVE READ AND WILL COMPLY WITH THE REQUIREMENTS OF THE GRADING AND EROSION CONTROL PLAN AND ALL OF THE REQUIREMENTS SPECIFIED IN THESE DETAILED PLANS AND SPECIFICATIONS.

Imstead	July 11,	2023
D	, ,	DATE

underesn

7/10/2023

COUNTY PLAN REVIEW IS PROVIDED ONLY FOR GENERAL CONFORMANCE WITH COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE FOR THE ACCURACY AND ADEQUACY OF THE DESIGN DIMENSIONS AND/OR ELEVATIONS WHICH SHALL BE CONFIRMED AT THE JOB SITE. THE COUNTY THROUGH THE APPROVAL OF THIS DOCUMENT ASSUMES NO RESPONSIBILITY FOR COMPLETENESS AND/OR ACCURACY OF THIS DOCUMENT.

FILED IN ACCORDANCE WITH THE REQUIREMENTS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE, DRAINAGE CRITERIA MANUAL VOLUMES 1 AND 2, AND ENGINEERING CRITERIA MANUAL, AS

> IER, P.E. NEER / ECM ADMINISTRATOR

DATE

CHEROKEE METROPOLITAN DISTRICT

WATER PLAN APPROVAL

APPROVED BY:_____

____ DATE:___

JJM 03/10/23 EJG MVZ12/20/22 EJG BY DATE APPR	
RESUBMITTAL #2 RESUBMITTAL #1 REVISION	
Q → 2	
Alter Arenue, Suite 300 Colorado Springs, Colorado 80903 (719) 453-0180	
SOLACE APARTMENTS FILING NO. 2 SANITARY AND WATER SERVICE PLANS UTILITY PLAN COVER SHEET	
PROJECT NO. 096668009 SHEET C-600	

S	FANDARD NOTES FOR EL PASO COUNTY CONSTRUCTION PLANS	<u>U</u>	TIL
1.	ALL DRAINAGE AND ROADWAY CONSTRUCTION SHALL MEET THE STANDARDS AND SPECIFICATIONS OF THE CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2, AND THE EL PASO COUNTY ENGINEERING CRITERIA MANUAL.	6	HE C 58-46 ONS
			INEF
2.	CONTRACTOR SHALL BE RESPONSIBLE FOR THE NOTIFICATION AND FIELD NOTIFICATION OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THE PLANS OR NOT, BEFORE BEGINNING CONSTRUCTION. LOCATION OF EXISTING UTILITIES SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. CALL 811 TO CONTACT THE UTILITY NOTIFICATION CENTER OF		AL ST
	COLORADO (UNCC).	2.	CH HY TH
3.	CONTRACTOR SHALL KEEP A COPY OF THESE APPROVED PLANS, THE GRADING AND EROSION CONTROL PLAN, THE STORMWATER MANAGEMENT PLAN (SWMP), THE SOILS AND GEOTECHNICAL REPORT, AND THE APPROPRIATE DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS AT THE JOB SITE AT ALL TIMES, INCLUDING THE FOLLOWING:	3.	TH
	a. EL PASO COUNTY ENGINEERING CRITERIA MANUAL (ECM) b. CITY OF COLORADO SPRINGS/EL PASO COUNTY DRAINAGE CRITERIA MANUAL, VOLUMES 1 AND 2	4.	AL
	 c. COLORADO DEPARTMENT OF TRANSPORTATION (CDOT) STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION d. CDOT M & S STANDARDS 	5.	CC ST
	C. CDOT M&S STANDARDS	6.	
4.	NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE	7.	DIS AL
	LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS FROM REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING. ANY MODIFICATIONS NECESSARY TO MEET CRITERIA AFTER-THE-FACT WILL BE ENTIRELY THE	8.	ST. TR
	DEVELOPER'S RESPONSIBILITY TO RECTIFY.	\٨/	ASTE
_			SE
5.	IT IS THE DESIGN ENGINEER'S RESPONSIBILITY TO ACCURATELY SHOW EXISTING CONDITIONS, BOTH ONSITE AND OFFSITE, ON THE CONSTRUCTION PLANS. ANY MODIFICATIONS NECESSARY DUE TO CONFLICTS, OMISSIONS, OR CHANGED CONDITIONS WILL BE ENTIRELY THE DEVELOPER'S RESPONSIBILITY TO RECTIFY.	2.	TH SE
~			AN
6.	CONTRACTOR SHALL SCHEDULE A PRE-CONSTRUCTION MEETING WITH EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT (PCD) - INSPECTIONS, PRIOR TO STARTING CONSTRUCTION.	3.	AL
7.	IT IS THE CONTRACTOR'S RESPONSIBILITY TO UNDERSTAND THE REQUIREMENTS OF ALL JURISDICTIONAL AGENCIES AND TO	4.	TH TO
	OBTAIN ALL REQUIRED PERMITS, INCLUDING BUT NOT LIMITED TO EL PASO COUNTY EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP), REGIONAL BUILDING FLOODPLAIN DEVELOPMENT PERMIT, U.S. ARMY CORPS OF ENGINEERS-ISSUED 401 AND/OR 404 PERMITS, AND COUNTY AND STATE FUGITIVE DUST PERMITS.	5.	AL
			ATER
8.	CONTRACTOR SHALL NOT DEVIATE FROM THE PLANS WITHOUT FIRST OBTAINING WRITTEN APPROVAL FROM THE DESIGN ENGINEER AND PCD. CONTRACTOR SHALL NOTIFY THE DESIGN ENGINEER IMMEDIATELY UPON DISCOVERY OF ANY ERRORS OR INCONSISTENCIES.	1.	SE DR
9.	ALL STORM DRAIN PIPE SHALL BE CLASS III RCP UNLESS OTHERWISE NOTED AND APPROVED BY PCD.	2.	SE SH FEI
10.	CONTRACTOR SHALL COORDINATE GEOTECHNICAL TESTING PER ECM STANDARDS. PAVEMENT DESIGN SHALL BE APPROVED	3.	AL
	BY EL PASO COUNTY PCD PRIOR TO PLACEMENT OF CURB AND GUTTER AND PAVEMENT.		AS FO
11.	ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE AT APPROVED CONSTRUCTION ACCESS POINTS.		(US ST
12.	SIGHT VISIBILITY TRIANGLES AS IDENTIFIED IN THE PLANS SHALL BE PROVIDED AT ALL INTERSECTIONS. OBSTRUCTIONS GREATER THAN 18 INCHES ABOVE FLOWLINE ARE NOT ALLOWED WITHIN SIGHT TRIANGLES.	4.	AL CH
13.	SIGNING AND STRIPING SHALL COMPLY WITH EL PASO COUNTY DPW AND MUTCD CRITERIA. [IF APPLICABLE, ADDITIONAL SIGNING AND STRIPING NOTES WILL BE PROVIDED.]	5.	AN AN
14.	CONTRACTOR SHALL OBTAIN ANY PERMITS REQUIRED BY EL PASO COUNTY DPW, INCLUDING WORK WITHIN THE RIGHT-OF-WAY AND SPECIAL TRANSPORT PERMITS.	6.	AL SH AS
15.	THE LIMITS OF CONSTRUCTION SHALL REMAIN WITHIN THE PROPERTY LINE UNLESS OTHERWISE NOTED. THE OWNER/DEVELOPER SHALL OBTAIN WRITTEN PERMISSION AND EASEMENTS, WHERE REQUIRED, FROM ADJOINING PROPERTY OWNER(S) PRIOR TO ANY OFF-SITE DISTURBANCE, GRADING, OR CONSTRUCTION.	7.	AL FL(
		8.	NO WA
		9.	

ITY SERVICE PLAN NOTES

INTRACTOR SHALL NOTIFY COLORADO SPRINGS UTILITIES' INSPECTIONS OFFICE (NORTH: 668-4396 OR SOUTH: 8) AND/OR CHEROKEE METRO DISTRICT (719-597-5080) A MINIMUM OF 48 HOURS PRIOR TO THE START OF RUCTION.

CONSTRUCTION METHODS AND MATERIALS SHALL MEET CSU WASTEWATER AND WATER LINE EXTENSION AND SERVICE NDARDS (WATER/WASTEWATER LESS), AND CHEROKEE METRO DISTRICT EXCEPTIONS.

ROKEE METRO DISTRICT DOES NOT GUARANTEE THE ACCURACY OF LOCATIONS OF EXISTING PIPELINES, MANHOLES, RANTS, VALVES AND SERVICE LINES. IF FIELD CONDITIONS ARE FOUND TO BE DIFFERENT THAN SHOWN ON THE PLANS, E CONTRACTOR SHALL NOTIFY THE INSPECTOR AND THE DESIGN ENGINEER IMMEDIATELY.

CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO ANY UTILITY FACILITIES AS A RESULT OF HIS ACTIONS. THE NTRACTOR SHALL MAKE ALL THE REQUIRED REPAIRS IMMEDIATELY TO THE SATISFACTION OF CHEROKEE METRO DISTRICT.

FIELD STAKING SHALL COMPLY WITH THE WATER/WASTEWATER LESS.

RROSION PROTECTION MEASURES SHALL COMPLY WITH THE WATER/WASTEWATER LESS AND CHEROKEE METRO NDARDS.

AL LOCATION OF ALL WASTEWATER AND WATER SERVICES SHALL BE APPROVED IN THE FIELD BY THE CHEROKEE METRO TRICT INSPECTOR.

TRENCH BACKFILL AND COMPACTION SHALL BE IN ACCORDANCE WITH SECTION 206 OF THE COLORADO SPRINGS UTILITIES NDARD SPECIFICATIONS MANUAL AND SECTION 5.18 OF THE WATER LESS AND CHEROKEE METRO STANDARDS.

CER WIRE IS REQUIRED FOR WATER AND WASTEWATER SERVICES SUBJECT TO CSU STANDARDS.

VATER:

VICE STUBS SHALL BE INSTALLED A MINIMUM OF SEVEN FEET (7') INTO THE PROPERTY, UNLESS OTHERWISE SHOWN, AND END OF THE STUB SHALL BE MARKED WITH A 2"X4"X12' STEEL OR WOODEN POST.

VICES SHALL BE CONNECTED A MINIMUM OF FIVE FEET (5') FROM THE OUTSIDE EDGE OF ANY MANHOLE ON THE MAIN LINE SHALL MAINTAIN TWO FEET (2') OF SEPARATION BETWEEN TAPS CENTER TO CENTER.

CLEANOUTS SHALL BE THE SAME SIZE AS THE SERVICE LINE.

CONTRACTOR SHALL NOTIFY EL PASO COUNTY DEPARTMENT OF HEALTH AND ENVIRONMENT WHEN ANY SEPTIC TANK IS BE ABANDONED AND PAY ALL FEES NECESSARY TO OBTAIN A PERMIT. MAINS TO BE ASTM D3034 SDR35.

VICE STUBS SHALL BE INSTALLED WITH THE CURB STOP AT OR NEAR PROPERTY LINE AND SHALL NOT BE INSTALLED WITHIN VEWAYS OR SIDEWALKS (SEE CHEROKEE METRO DISTRICT DETAIL DRAWING W-38).

VICE TAPS SHALL BE MADE A MINIMUM OF THREE FEET (3') FROM THE BELL OR APPURTENANCE ON THE WATER MAIN. TAPS ALL BE A MINIMUM OF THREE FEET (3') APART ON THE SAME SIDE OF THE WATER MAIN AND A MINIMUM OF ONE-AND-A-HALF T (1.5') WHEN TAPS ARE MADE ON OPPOSITE SIDES OF THE WATER MAIN.

SERVICES FOR COMMERCIAL USE AND SOME RESIDENTIAL USES REQUIRE INSTALLATION OF A BACKFLOW PREVENTION EMBLY IMMEDIATELY AFTER THE METER. THE BACKFLOW PREVENTION ASSEMBLY SHALL BE APPROVED BY THE INDATION FOR CROSS-CONNECTION CONTROL AND HYDRAULIC RESEARCH OF THE UNIVERSITY OF SOUTHERN CALIFORNIA C-FCCCHR) AND INSTALLED IN ACCORDANCE WITH THIS LISTING. PLEASE REFERENCE THE WATER LINE EXTENSION NDARDS FOR ADDITIONAL REQUIREMENTS.

TAPS ON CHEROKEE METRO DISTRICT WATER MAINS SHALL BE PERFORMED BY CONTRACTOR AND INSPECTED BY ROKEE METRO DISTRICT. ALL OTHER TAPS SHALL BE PERFORMED BY THE CONTRACTOR.

ABANDONED SERVICES MUST BE PHYSICALLY DISCONNECTED AT THE MAIN. ANY NECESSARY REPAIRS TO THE MAIN O/OR SHUT DOWN OF THE TAPPING VALVE SHALL BE AS DIRECTED BY CHEROKEE METRO DISTRICT.

WATER SERVICE LINES SHOULD ENTER THE BUILDING WITHIN 3 FEET OF AN EXTERIOR WALL. EXPOSED WATER PLUMBING ALL BE MINIMIZED INSIDE THE BUILDING PRIOR TO THE WATER METER AND/OR APPROVED BACKFLOW PREVENTION EMBLY OR METHOD.

HDPE WATER SERVICE LINES MUST EXTEND A MINIMUM OF 6 INCHES ABOVE THE FLOOR AND BE 90 DEGREES FROM THE OR PLAN TO ALLOW FOR BRACING AND TRANSITION TO THE METER LOOP ASSEMBLY.

COPPER PIPING ALLOWED IN CHEROKEE METRO DISTRICT EXCEPT ABOVE GRADE PIPING IMMEDIATELY BEFORE AND AFTER TER METER.

WATER MAINS TO BE AWWA C900 DR14.

COLOR STREET DESIGN FOR CITY ENG UTILITY GRADE REVIEW: _____ CURB & GUTTER REVIEW: ____ FINAL REVIEW: _____ DRAINAGE DESIGN: _____ THIS IS FILED IN ACCORDANCE ORDINANCE) OF THE CODE OF AMENDED.

	JJM 03/10/23 EJG MVZ 12/20/22 EJG BY DATE
	RESUBMITTAL #2 RESUBMITTAL #1 REVISION
	N0.1 2
	The colorado Springs, Colorado Springs, Colorado Springs, Colorado Springs, Colorado 80903 (719) 453–0180
	SOLACE APARTMENTS FILING NO. 2 SANITARY AND WATER SERVICE PLANS UTILITY GENERAL NOTES
ow what's below .	PROJECT NO. 096668009 SHEET
Call before you dig.	C-601

RADO SPRINGS REVIEW	
GINEERING:	
	DATE:
	DATE:
	DATE:
	DATE:
E WITH SECTION 7.7.906 (DRAIN) F THE CITY OF COLORADO SPRIN	



lnow what's **below**.

	RIVATE ENGINEER'S NOTICE TO CONTRACTORS:	<u>\</u>	WA	STEV
THI 1.	E FOLLOWING NOTES ARE PROVIDED TO GIVE DIRECTIONS TO THE CONTRACTOR BY THE ENGINEER OF THE PLANS. THE CHEROKEE METRO DISTRICT ENGINEER'S SIGNATURE ON THESE PLANS DOES NOT CONSTITUTE APPROVAL OF ANY OF THESE NOTES AND THE CITY WILL NOT BE HELD RESPONSIBLE FOR THEIR ENFORCEMENT.		APPLICABLE	NON- APPLICABLE
	APPROVAL OF THESE PLANS BY CHEROKEE METRO DISTRICT DOES NOT AUTHORIZE ANY WORK TO BE PERFORMED UNTIL A PERMIT HAS BEEN ISSUED. THE APPROVAL OF THIS PLAN OR ISSUANCE OF A PERMIT BY CHEROKEE METRO DISTRICT DOES NOT AUTHORIZE THE SUBDIVIDER	1.	•	NON
3. 4.	AND OWNER TO VIOLATE ANY FEDERAL, STATE OR COUNTY LAWS, ORDINANCES, REGULATIONS, OR POLICIES. NEITHER THE OWNER, NOR THE ENGINEER OF WORK WILL ENFORCE SAFETY MEASURES OR REGULATIONS. THE CONTRACTOR			
5.	SHALL DESIGN, CONSTRUCT, AND MAINTAIN ALL SAFETY DEVICES, INCLUDING SHORING, AND SHALL BE SOLELY RESPONSIBLE FOR CONFORMING TO ALL LOCAL, STATE AND FEDERAL SAFETY AND HEALTH STANDARDS, LAWS, AND REGULATIONS. CONTRACTOR AGREES THAT HE/SHE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOBSITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING: SAFETY OF ALL PERSONS AND PROPERTY, AND THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS; AND THAT THE CONTRACTOR SHALL DEFEND, INDEMNIFY, AND HOLD THE OWNER AND ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION	2.		
6.	WITH THE PERFORMANCE OF WORK ON THIS PROJECT EXCEPT LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER. THE CONTRACTOR SHALL BE RESPONSIBLE TO INSURE THAT ALL SLOPES, STREETS, UTILITIES, AND STORM SEWERS ARE BUILT IN ACCORDANCE WITH THESE PLANS. IF THERE IS ANY QUESTION REGARDING THESE PLANS OR FIELD STAKES, THE CONTRACTOR SHALL REQUEST AN INTERPRETATION BEFORE DOING ANY WORK BY CALLING THE ENGINEER OF RECORD AT 719-453-0180. IN THE EVENT THAT PROPOSED EROSION CONTROL IS INSUFFICIENT, CONTRACTOR WILL INSTALL ADDITIONAL EROSION CONTROLS AT OWNER'S EXPENSE.	3.		
7.	EXCEPT AS NOTED HEREON ALL UTILITY SERVICES WITHIN THIS DEVELOPMENT ARE UNDERGROUND INSTALLATIONS. THE CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES PRIOR TO STARTING WORK NEAR THEIR FACILITIES, AND SHALL COORDINATE HIS WORK WITH COMPANY REPRESENTATIVES. FOR UTILITY MARK-OUT SERVICE, CALL 811.	4.		\boxtimes
8.	THE EXISTENCE AND LOCATION OF UNDERGROUND UTILITIES OR STRUCTURES SHOWN ON THESE PLANS WERE OBTAINED FROM A SEARCH OF THE AVAILABLE RECORDS. TO THE BEST OF OUR KNOWLEDGE THERE ARE NO OTHER EXISTING UTILITIES EXCEPT AS SHOWN ON THESE PLANS. NO REPRESENTATION IS MADE AS TO THE ACCURACY OR COMPLETENESS OF SAID UTILITY INFORMATION. THE CONTRACTOR IS REQUIRED TO TAKE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN HEREON AND ANY OTHERS NOT OF RECORD OR NOT SHOWN ON THESE PLANS. UTILITIES NOT OF RECORD OR NOT SHOWN ON THESE PLANS. UTILITIES NOT OF RECORD OR NOT SHOWN ON PLANS SHALL BE CONSIDERED UNFORESEEN CONDITIONS AND DAMAGES THERETO SHALL BE REPAIRED AT THE OWNER'S EXPENSE.	5.		
9.	LOCATION AND ELEVATION OF EXISTING IMPROVEMENTS SHALL BE CONFIRMED BY FIELD MEASUREMENTS PRIOR TO CONSTRUCTION OF NEW WORK.	6.	\boxtimes	
10.	CONTRACTOR SHALL MAKE EXPLORATORY EXCAVATIONS AND LOCATE EXISTING UNDERGROUND FACILITIES SUFFICIENTLY AHEAD OF CONSTRUCTION TO PERMIT REVISIONS TO PLANS IF REVISIONS ARE NECESSARY BECAUSE OF ACTUAL LOCATION OF EXISTING FACILITIES, AT THE OWNER'S DISCRETION AND EXPENSE.	7.	\boxtimes	
11.	FOR ALL UTILITY TRENCHES, SOILS REPORTS SHALL BE SUBMITTED TO THE ENGINEER OF RECORD BY A QUALIFIED SOILS ENGINEER WHICH CERTIFY THAT TRENCH BACKFILL WAS COMPACTED AS DIRECTED BY THE SOILS ENGINEER IN ACCORDANCE WITH THE ON-SITE EARTHWORK SPECIFICATIONS.	8.	\boxtimes	
	ANY WORK DONE WITHOUT INSPECTION OR MATERIALS TESTING IS SUBJECT TO REMOVAL OR CORRECTION. CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF ANY DAMAGE TO THE EXISTING IMPROVEMENTS AND REPLACEMENT TO THE SATISFACTION OF THE FIELD ENGINEER.	9.		\boxtimes
14.	PRIOR TO COMMENCING CONSTRUCTION, THE CONTRACTOR SHALL VERIFY ALL JOIN CONDITIONS FOR GRADING, DRAINAGE AND UNDERGROUND FACILITIES, INCLUDING LOCATION AND ELEVATION OF EXISTING UNDERGROUND FACILITIES AT CROSSINGS WITH PROPOSED UNDERGROUND FACILITIES, AT THE OWNER'S DISCRETION AND EXPENSE. IF CONDITIONS DIFFER FROM THOSE SHOWN ON THE PLANS THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND SHALL NOT BEGIN CONSTRUCTION UNTIL THE CHANGED CONDITIONS HAVE BEEN EVALUATED.			
15.	THE CONTRACTOR SHALL FAMILIARIZE HIMSELF/HERSELF WITH THE PLANS, THE SOILS AND/OR GEOLOGY REPORTS, AND THE SITE CONDITIONS PRIOR TO COMMENCING WORK.		W	ASTE
16.	SHOULD CONFLICTING INFORMATION BE FOUND ON THE PLANS OR IN THE FIELD, THE CONTRACTOR SHALL NOTIFY THE PROJECT ENGINEER AT KIMLEY-HORN BEFORE PROCEEDING WITH THE WORK IN QUESTION.		668	E CONTR 3-4658) AI NSTRUC
17.	THE CONTRACTOR SHALL BE RESPONSIBLE FOR SURVEY MONUMENTS AND/OR VERTICAL CONTROL BENCHMARKS WHICH ARE DISTURBED OR DESTROYED BY CONSTRUCTION. CONTRACTOR'S LAND SURVEYOR MUST FIELD LOCATE, REFERENCE, AND/OR PRESERVE ALL HISTORICAL OR CONTROLLING MONUMENTS PRIOR TO ANY EARTHWORK. IF DESTROYED, CONTRACTOR'S LAND SURVEYOR SHALL REPLACE SUCH MONUMENTS WITH APPROPRIATE MONUMENTS. A CORNER RECORD OR RECORD OF SURVEY, AS APPROPRIATE, SHALL BE FILED AS REQUIRED BY THE PROFESSIONAL LAND SURVEYORS ACT. IF ANY VERTICAL CONTROL IS TO BE DISTURBED OR DESTROYED, THE COLORADO SPRINGS (EL PASO COUNTY) FIELD SURVEY SECTION MUST BE NOTIFIED, IN WRITING, AT LEAST 3 DAYS PRIOR TO THE CONSTRUCTION. THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPLACING ANY		1.	ALL CON (WASTE)
18.	VERTICAL CONTROL BENCHMARKS DESTROYED BY THE CONSTRUCTION. DEVIATIONS FROM THESE PLANS SIGNED PLANS WILL NOT BE ALLOWED UNLESS THE COUNTY ENGINEER APPROVES A			THE COI
19.	CONSTRUCTION CHANGE OR THE COUNTY/AGENCY INSPECTOR REQUIRES THE CHANGE. AS-BUILT DRAWINGS MUST BE SUBMITTED BY THE CONTRACTOR TO THE ENGINEER PRIOR TO ACCEPTANCE OF THIS PROJECT.			SERVICE
20.	THE AREA WHICH IS DEFINED AS A NON GRADING AREA AND WHICH IS NOT TO BE DISTURBED SHALL BE STAKED PRIOR TO START OF THE WORK. THE PERMIT APPLICANT AND ALL OF THEIR REPRESENTATIVES OR CONTRACTORS SHALL COMPLY WITH THE REQUIREMENTS FOR PROTECTION OF THIS AREA AS REQUIRED BY ANY APPLICABLE AGENCY. ISSUANCE OF THE CITY'S GRADING PERMIT SHALL NOT RELIEVE THE APPLICANT OR ANY OF THEIR REPRESENTATIVES OR CONTRACTORS FROM COMPLYING WITH ANY STATE OR FEDERAL REQUIREMENTS BY AGENCIES INCLUDING BUT NOT LIMITED TO COLORADO DEPARTMENT OF PUBLIC HEALTH			NO TREE THE CO CONTRA
21	AND ENVIRONMENT OR COLORADO DIVISION OF WILDLIFE. COMPLIANCE MAY INCLUDE OBTAINING PERMITS, OTHER AUTHORIZATIONS, OR COMPLIANCE WITH MANDATES BY ANY APPLICABLE STATE OR FEDERAL AGENCY. NOTES AND DETAILS DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS. WHERE NO DETAILS ARE			ALL FIEL
	GIVEN, CONSTRUCTION SHALL BE AS SHOWN FOR SIMILAR WORK.		0	CONSTR
	IF AT ANY TIME DURING THE GRADING OPERATION, ANY UNFAVORABLE GEOLOGICAL CONDITIONS ARE ENCOUNTERED, GRADING IN THAT AREA SHALL STOP UNTIL APPROVED CORRECTIVE MEASURES ARE OBTAINED. STRAIGHT GRADE SHALL BE MAINTAINED BETWEEN CONTOUR LINES AND SPOT ELEVATIONS UNLESS OTHERWISE SHOWN ON THE		0.	CONDITI STANDA
23.	PLANS. THE CONTRACTOR SHALL TAKE ADDITIONAL CARE TO ENSURE POSITIVE DRAINAGE AWAY FROM THE STRUCTURE WHILE MEETING MINIMUM AND MAXIMUM PAVEMENT SLOPES AS DEFINED IN THE CRITERIA.		9.	REUSE (
	ALL DEBRIS AND FOREIGN MATERIAL SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT APPROVED DISPOSAL SITES. THE CONTRACTOR SHALL OBTAIN NECESSARY PERMITS FOR THE TRANSPORTATION OF MATERIAL TO AND FROM THE SITE. DIMENSIONS TO PIPELINES ARE TO CENTERLINE UNLESS OTHERWISE NOTED.			ALL TRE
	CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN IN THESE PLANS SHALL BE PERFORMED BY CONTRACTOR'S LICENSED LAND SURVEYOR.			ALL MA 12" WIDE INTERIO
	ALL DIMENSIONS ARE IN FEET OR DECIMALS THEREOF. SPOT GRADES ARE TO FLOWLINE OR FINISH PAVEMENT GRADE UNLESS OTHERWISE NOTED.			MAINS A
	CONTRACTOR TO BE AWARE OF ALL OVERHEAD LINES AT ALL TIMES, SO AS NOT TO DISTURB THEM.			
30.	STORM DRAINAGE SYSTEMS SHOWN ON THESE PLANS HAVE BEEN DESIGNED FOR THE FINAL SITE CONDITION AT COMPLETION OF THE PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ADEQUATE DRAINAGE OF THE SITE, DURING INTERIM CONDITIONS OF CONSTRUCTION.			
31.	RETAINING WALLS LOCATED CLOSER TO THE PROPERTY LINE THAN THE HEIGHT OF THE WALL SHALL BE BACKFILLED NOT LATER THAN 10 DAYS AFTER CONSTRUCTION OF THE WALL AND NECESSARY STRUCTURAL SUPPORTING MEMBERS UNLESS RECOMMENDED OTHERWISE BY RESPONSIBLE ENGINEER.			
32.	THE CONTRACTOR IS RESPONSIBLE FOR APPLYING FOR AND OBTAINING A STATE STORMWATER DISCHARGE PERMIT FROM COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT (CDPHE) AT MINIMUM 10 BUSINESS DAYS PRIOR TO THE START OF GRADING ACTIVITIES ONSITE. 10 BUSINESS DAYS IS THE MINIMUM TIME REQUIRED BY THE STATE TO PROCESS THE APPLICATION. IT IS HIGHLY RECOMMENDED THAT THE CONTRACTOR APPLY FOR THE PERMIT AT LEAST 20 BUSINESS DAYS PRIOR TO THE START OF GRADING ACTIVITIES.			

ΓEV	VATER PROJECT SPECIFIC NOTES		WA	TER F	PROJECT SPEC
NON- APPLICABLE			APPLICABLE	NOT- APPLICABLE	
\boxtimes	CORROSION PROTECTION IS REQUIRED FOR ALL DUCTILE IRON PIPE. ALL PROTECTION SHALL COMPLY WITH THE WASTEWATER STANDARDS.	1.		\boxtimes	ANY EXISTING STUBS A REPLACED WITH AN AC
\boxtimes	THIS PROJECT IS CONNECTING TO AN EXISTING MANHOLE. A MANHOLE ASSESSMENT HAS BEEN COMPLETED FOR THIS PROJECT. THE FOLLOWING CHECKED ITEMS ARE REQUIRED: THE CONTRACTOR SHALL PROVIDE A BYPASS PUMPING PLAN FOR APPROVAL BY CHEROKEE METRO	2.			A CONNECTION TO AN GUARANTEE THE ACCL ANY "AS-BUILT" DRAWI
	DISTRICTS AND COMPLY WITH ALL THE REQUIREMENTS THEREIN. REPAIR THE EXISTING MANHOLE (REFER TO PLAN AND PROFILE FOR REQUIREMENTS). REPLACE THE EXISTING MANHOLE (REFER TO PLAN AND PROFILE FOR REQUIREMENTS.	3.			A WATER STUB-OUT(S) THAT THE DESIGN OR DEVELOPMENT NEEDS
	 MANHOLES ARE BEING ABANDONED, THE CONTRACTOR SHALL: PLUG THE "IN" AND "OUT" INVERTS WITH A WATERTIGHT MECHANICAL PLUG AND GROUT WITH APPROVED MATERIAL. REMOVE AND DISPOSE OF THE CONE SECTION. REMOVE THE RING AND COVER AND RETURN THEM TO CHEROKEE METRO DISTRICT. FILL THE MANHOLE WITH APPROVED MATERIAL. 	 [т	HE CON	NTRACTO	A WATER QUALITY PLA
	WASTEWATER MAINS EXISTS UNDERNEATH A PROPOSED STRUCTURE, CONTRACTOR SHALL: REMOVE IT GROUT IT FULL	⊺ G	0 THE ENERA ALL	START C AL: CONSTRU	58) AND/OR CHEROKE OF CONSTRUCTION. ICTION METHODS AND WATER LESS) AND CHER
	WASTEWATER MAIN TO BE ABANDONED EXISTS WITHIN RIGHT-OF-WAY, THE CONTRACTOR SHALL: REMOVE IT GROUT IT FULL		THE C	CONTRAC	TOR SHALL OBTAIN LOCA ETRO DISTRICT DOES N LVES AND SERVICE LINE
	PIPELINES LESS THAN 1.04% GRADE ARE PROPOSED. THE CONTRACTOR SHALL COMPLY WITH THE ADDITIONAL REQUIREMENTS AS SPECIFIED WITHIN THE WASTEWATER STANDARDS.		PLAN	S, THE CC	INTRACTOR SHALL NOTIF
	THIS PROJECT IS UTILIZING EXISTING STUBS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT THE STUB, CONNECTION, TRANSITION AND SUBSEQUENT EXTENSION MEETS ALL CURRENT WASTEWATER STANDARDS.		THE C CONT	CONTRAC [®] RACTOR	STRUCTURES ARE PERMI TOR IS RESPONSIBLE FO SHALL MAKE ALL THE TIES AND CHEROKEE ME ⁻
	CHEROKEE METRO DISTRICT DOES NOT GUARANTEE THE ACCURACY OF THE DEPTHS OR LOCATIONS OF EXISTING STUBS SHOWN ON ANY "AS CONSTRUCTED" DRAWINGS. FURTHER, THE EXISTING STUB WILL BE INCLUDED IN THE TWO-YEAR WARRANTY PERIOD FOR THIS PROJECT.				KING SHALL COMPLY WIT
		7.	THE C	CONTRAC	TOR SHALL MAKE THEIR

A WASTEWATER STUB OR STUBS ARE PROPOSED. CHEROKEE METRO DISTRICT DOES NOT GUARANTEE DEVELOPMENT NEEDS. FURTHER, THE STUB WILL NOT BE INCLUDED IN THE TWO-YEAR WARRANTY PERIOD FOR THIS PROJECT.

EWATER PLAN NOTES

RACTOR SHALL NOTIFY COLORADO SPRINGS UTILITIES' INSPECTIONS OFFICE (NORTH: 668-4396 OR SOUTH: AND/OR CHEROKEE METRO DISTRICT (719-597-5080) A MINIMUM OF 48 HOURS PRIOR TO THE START OF CTION.

INSTRUCTION METHODS AND MATERIALS SHALL MEET CSU WASTEWATER LINE EXTENSION AND SERVICE STANDARDS EWATER STANDARDS) AND CHEROKEE METRO DISTRICT EXCEPTIONS.

ONTRACTOR SHALL OBTAIN LOCATES PRIOR TO ANY EXCAVATION.

KEE METRO DISTRICT DOES NOT GUARANTEE THE ACCURACY OF LOCATIONS OF EXISTING PIPELINES, MANHOLES AND CE LINES. IF FIELD CONDITIONS ARE FOUND TO BE DIFFERENT THAN SHOWN ON THE PLANS, THE CONTRACTOR SHALL THE INSPECTOR AND THE ENGINEER OF RECORD IMMEDIATELY.

EES OR STRUCTURES ARE PERMITTED WITHIN FIFTEEN FEET (15') OF A WASTEWATER MAIN.

ONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO ANY UTILITY FACILITIES AS A RESULT OF HIS ACTIONS. THE ACTOR SHALL MAKE ALL THE REQUIRED REPAIRS IMMEDIATELY TO THE SATISFACTION OF CHEROKEE METRO DISTRICT.

ELD STAKING SHALL COMPLY WITH THE WASTEWATER STANDARDS.

CONTRACTOR SHALL ENSURE THAT WASTEWATER SERVICE TO ADJACENT PROPERTIES IS MAINTAINED DURING RUCTION.

ANHOLES LOCATED WITHIN THE PROJECT LIMITS SHALL BE ADJUSTED TO FINISH GRADE. IF MANHOLES ARE IN POOR TION OR IF THE DISTANCE BETWEEN THE RING/COVER AND CONE OF THE MANHOLE EXCEEDS THE WASTEWATER ARDS, THE CONTRACTOR MAY BE REQUIRED TO REPLACE PART OR ALL OF THE EXISTING MANHOLES.

OR SALVAGE OF ANY MATERIAL IS LEFT TO THE DISCRETION OF THE CHEROKEE METRO DISTRICT INSPECTOR.

ENCH BACKFILL AND COMPACTION SHALL BE IN ACCORDANCE WITH SECTION 206 OF THE CHEROKEE METRO DISTRICT ARD SPECIFICATIONS MANUAL.

ANHOLES TO BE 5' MIN. DIAMETER & EXTERIOR COATED WITH MIN. 45 MIL. COAL TAR EPOXY & WRAP JOINTS WITH DE ELASTOMERIC JOINT WRAP.

OR LINING TO CONFORM WITH CSU STANDARD 4.5A

AND LATERALS TO BE CSU STANDARD AS LISTED IN TABLE 2.6.B.3

1.		APPLICAE	ANY EXISTING STUBS AI REPLACED WITH AN ACC
2.			A CONNECTION TO AN E GUARANTEE THE ACCUI ANY "AS-BUILT" DRAWIN
3.		\boxtimes	A WATER STUB-OUT(S) I THAT THE DESIGN OR II DEVELOPMENT NEEDS.
4.	\boxtimes		A WATER QUALITY PLAN

ND MATERIALS SHALL MEET CSU WATER LINE EXTENSION AND SERVICE ROKEE METRO DISTRICT STANDARDS.

- IS MAINTAINED DURING CONSTRUCTION.
- INSPECTOR.
- MATCH THE STATIONING ON THE PLANS.
- BY THE INSPECTOR.
- INSPECTOR.
- DISTRICT STANDARD SPECIFICATIONS MANUAL AND CHEROKEE STANDARDS.
- 14. ALL ISOLATION VALVES TO OPEN COUNTERCLOCKWISE.

COLORADO SPRINGS REVIEW	
STREET DESIGN FOR CITY ENGINEERING:	
JTILITY GRADE REVIEW:	DATE:
CURB & GUTTER REVIEW:	DATE:
FINAL REVIEW:	DATE:
DRAINAGE DESIGN:	DATE:
THIS IS FILED IN ACCORDANCE WITH SECTION 7.7.906 (DRAINA DRDINANCE) OF THE CODE OF THE CITY OF COLORADO SPRIN AMENDED.	

ECIFIC NOTES

AND APPURTENANCES THAT WILL NOT BE USED SHALL BE REMOVED AND CCEPTABLE SECTION OF MAIN AT THE EXPENSE OF THE CONTRACTOR.

EXISTING STUB IS PROPOSED. CHEROKEE METRO DISTRICT DOES NOT JRACY OF THE DEPTHS OR LOCATIONS OF EXISTING STUBS SHOWN ON NGS.

IS/ARE PROPOSED. CHEROKEE METRO DISTRICT DOES NOT GUARANTEE INSTALLATION OF THE PROPOSED WATER STUB-OUT WILL MEET FUTURE

AN HAS BEEN APPROVED FOR THIS PROJECT

_ORADO SPRINGS UTILITIES' INSPECTIONS OFFICE (NORTH: 668-4396 OR KEE METRO DISTRICT (719-597-5080) A MINIMUM OF 48 HOURS PRIOR

CATES PRIOR TO ANY EXCAVATION.

NOT GUARANTEE THE ACCURACY OF LOCATIONS OF EXISTING PIPELINES, NES. IF FIELD CONDITIONS ARE FOUND TO BE DIFFERENT THAN SHOWN ON THE TIFY THE INSPECTOR AND THE ENGINEER OF RECORD IMMEDIATELY.

MITTED WITHIN FIFTEEN FEET (15') OF A WATER MAIN.

FOR ANY DAMAGE TO ANY UTILITY FACILITIES AS A RESULT OF HIS ACTIONS. THE E REQUIRED REPAIRS IMMEDIATELY TO THE SATISFACTION OF COLORADO IETRO DISTRICT.

ITH THE WATER LESS AND CHEROKEE STANDARDS.

7. THE CONTRACTOR SHALL MAKE THEIR BEST EFFORT TO ENSURE THAT WATER SERVICE TO ADJACENT PROPERTIES

8. CORROSION PROTECTION MEASURES SHALL COMPLY WITH THE WATER LESS AND CHEROKEE STANDARDS.

9. NO SERVICE TAPS SHALL BE MADE UNTIL AUTHORIZATION HAS BEEN GRANTED BY THE CHEROKEE METRO DISTRICT'

10. ALL BENDS SHALL BE FIELD STAKED PRIOR TO CONSTRUCTION AND THE STATIONING ON THE FIELD STAKES SHALL

11. FIELD MODIFICATIONS TO A FIRE SERVICE LINE OR FIRE HYDRANT DESIGN OR LOCATION MAY NEED TO BE APPROVED BY THE DESIGN ENGINEER, FALCON FIRE DEPARTMENT AND CHEROKEE METRO DISTRICT, AS REQUIRED

12. REUSE OR SALVAGE OF ANY MATERIAL IS LEFT TO THE DISCRETION OF THE CHEROKEE METRO DISTRICT

13. ALL TRENCH BACKFILL AND COMPACTION SHALL BE IN ACCORDANCE WITH SECTION 206 OF THE CHEROKEE METRO




Know what's below. Call before you dig.

UJM 03/10/23 F # SUBMITTAL SUBMITTAL - 10 \approx D ŇΝ DESIGNED BY: MVZ DRAWN BY: MV CHECKED BY: EJC DATE: 03/10/2023 \sim 0 S C Ц FILIN Ш SERVICE S S WATER S GENERAL TMENT <mark>Υ ΑΝ</mark>Ο Ι AR Δ A Ъ К Ш 4 AC ANIT О ഗ S




SHEET C-602

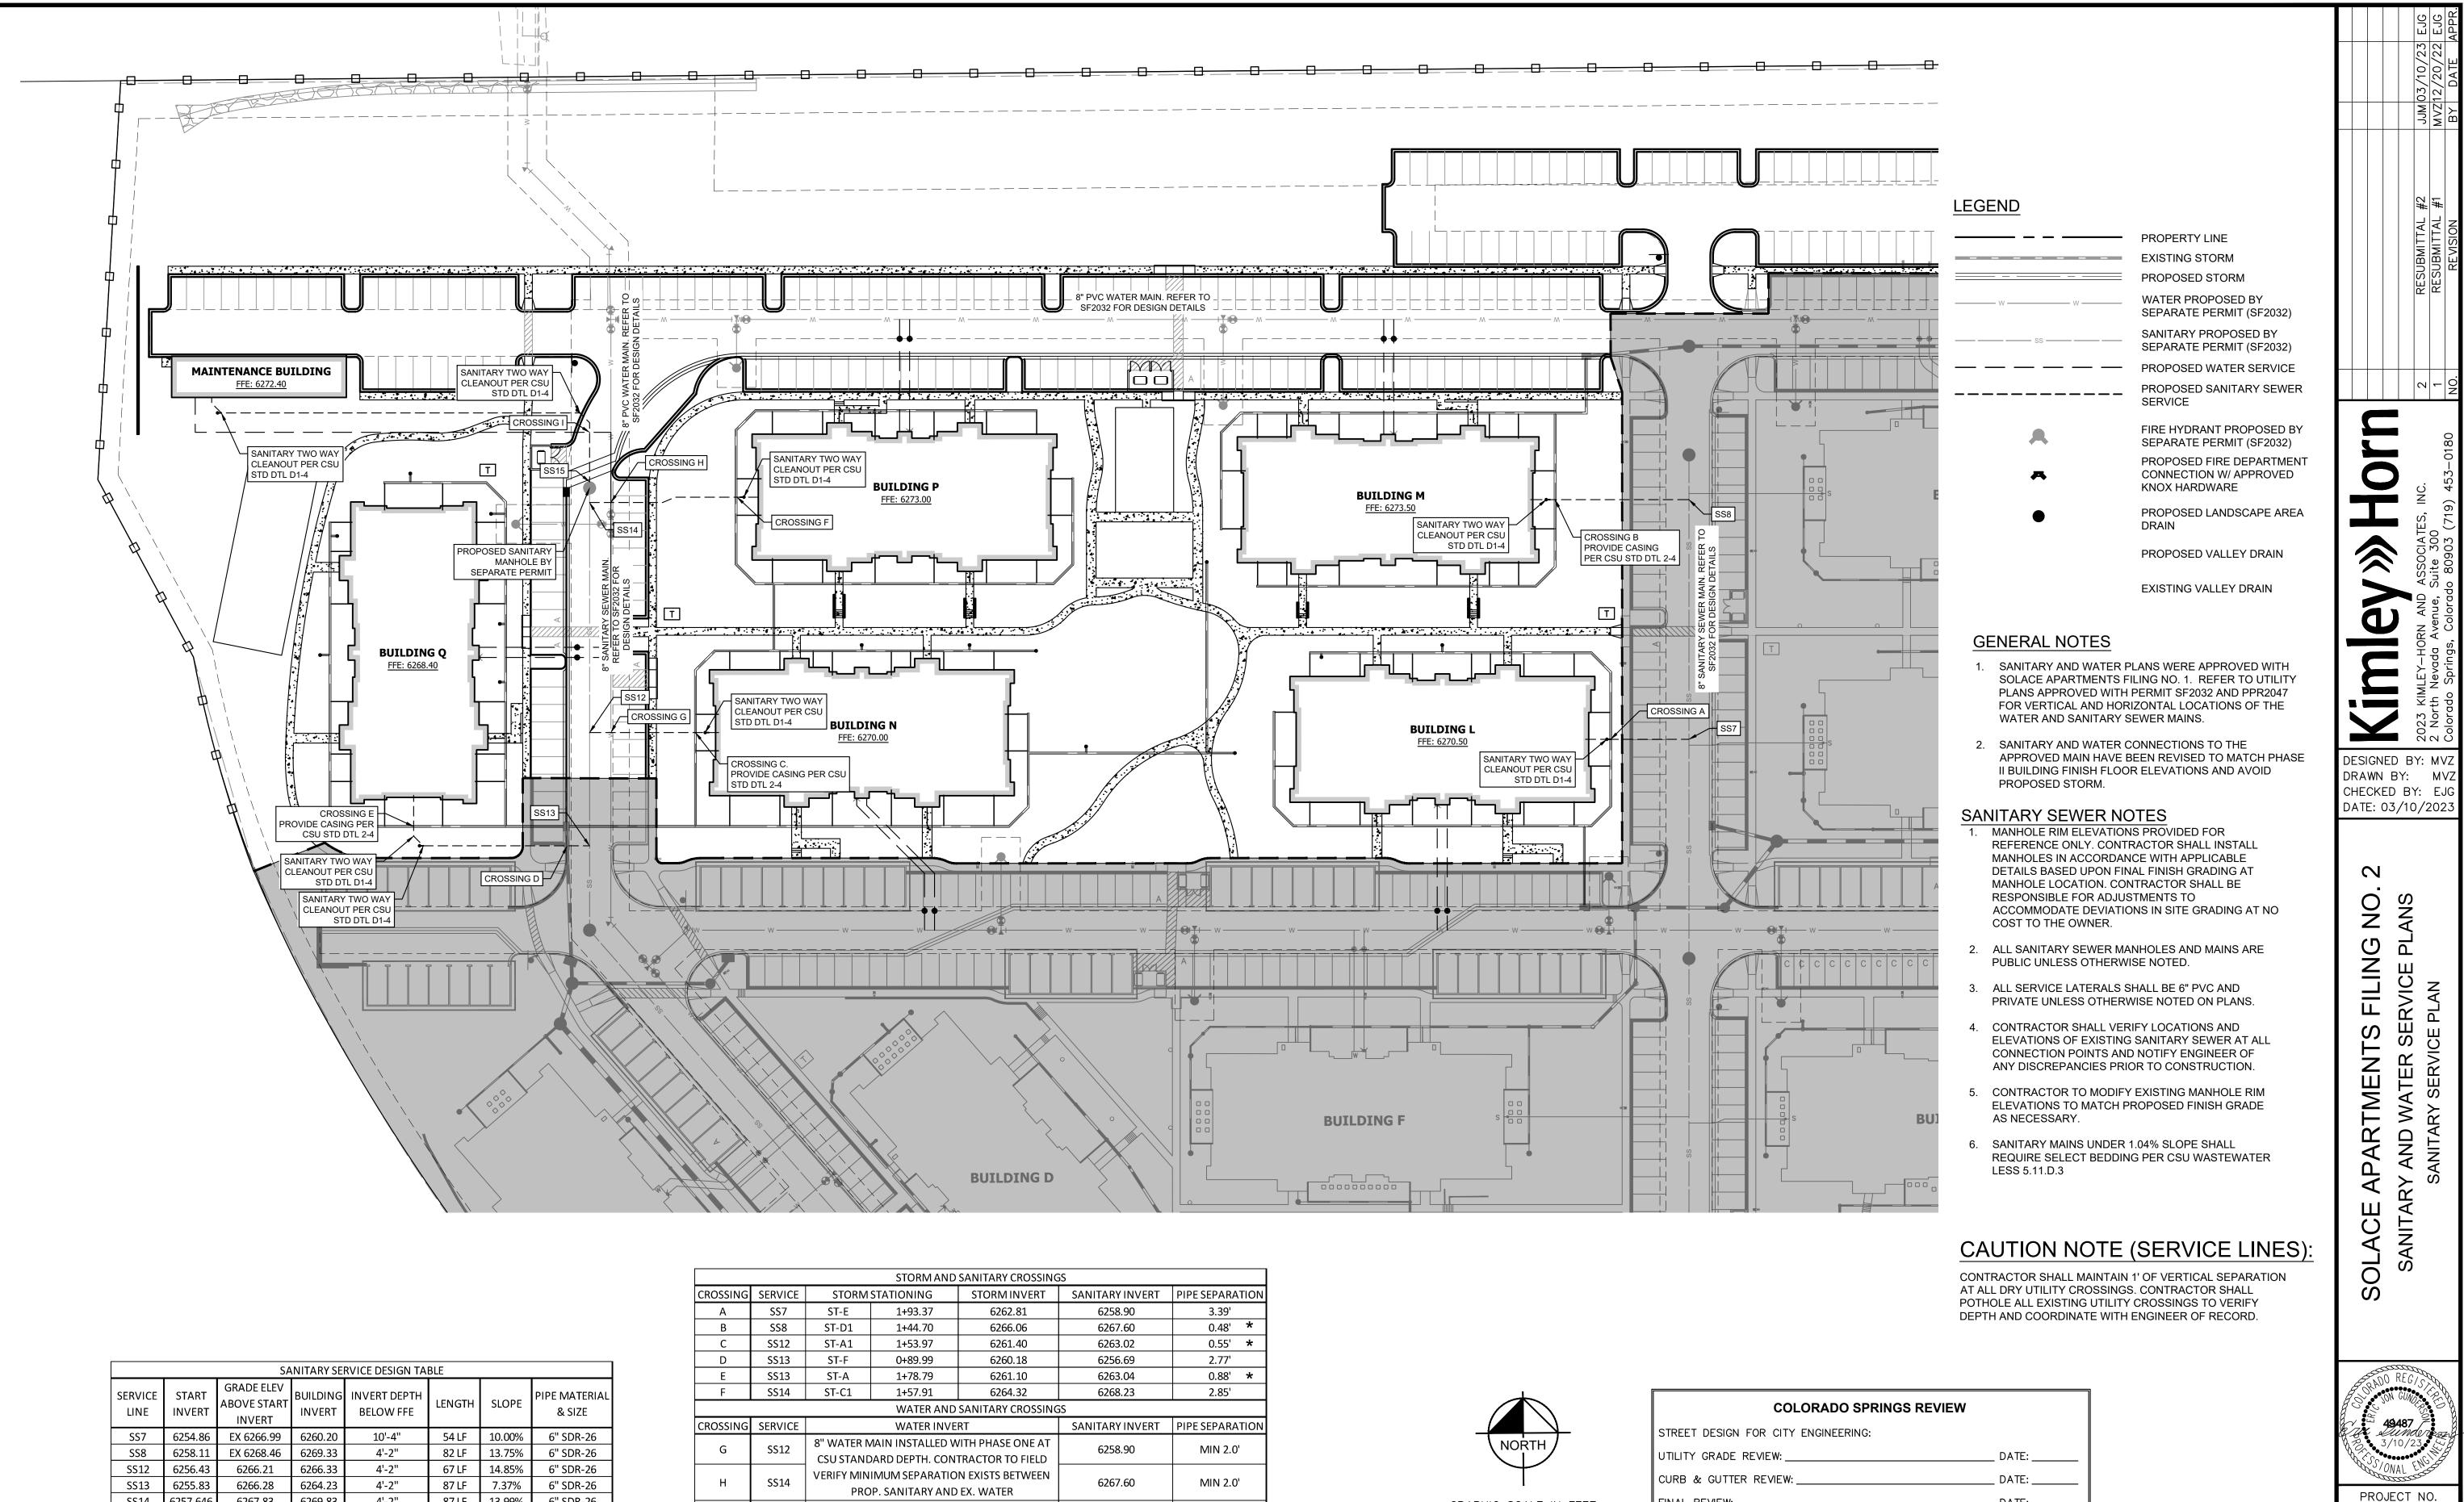

	SANITARY SERVICE DESIGN TABLE								
SERVICE LINE	START INVERT	GRADE ELEV ABOVE START INVERT	BUILDING INVERT	INVERT DEPTH BELOW FFE	LENGTH	SLOPE	PIPE MATERIAL & SIZE		
SS7	6254.86	EX 6266.99	6260.20	10'-4"	54 LF	10.00%	6" SDR-26		
SS8	6258.11	EX 6268.46	6269.33	4'-2"	82 LF	13.75%	6" SDR-26		
SS12	6256.43	6266.21	6266.33	4'-2"	67 LF	14.85%	6" SDR-26		
SS13	6255.83	6266.28	6264.23	4'-2"	87 LF	7.37%	6" SDR-26		
SS14	6257.646	6267.83	6269.83	4'-2"	87 LF	13.99%	6" SDR-26		
SS15	6257.84	6267.912	6267.40	5'-0"	236 LF	4.05%	4" SDR-26		

CONTR SS15 (WS16) 1 1 *CROSSINGS WITH LESS THA PER CSU STANDARD DETAIL

STORM AND SANITARY CROSSINGS									
ORM STATIONING STOP		STORM INVERT	SANITARY INVERT	PIPE SEPARATION					
	1+93.37	6262.81	6258.90	3.39'					
1	1+44.70	6266.06	6267.60	0.48' *					
1	1+53.97	6261.40	6263.02	0.55' *					
=	0+89.99	6260.18	6256.69	2.77'					
4	1+78.79	6261.10	6263.04	0.88' *					
1	1+57.91	6264.32	6268.23	2.85'					
WATER AND SANITARY CROSSINGS									
	WATER INVE	RT	SANITARY INVERT	PIPE SEPARATION					
		/ITH PHASE ONE AT TRACTOR TO FIELD	6258.90	MIN 2.0'					
	IMUM SEPARATIO P. SANITARY AND	N EXISTS BETWEEN EX. WATER	6267.60	MIN 2.0'					
	TOR TO ADJUST 1' PROVIDE 2.0' OF S SANITARY SERVIC	EPARATION FROM	6259.00	MIN 2.0'					
HAN 18" OF SEPARATION WILL HAVE A 12" STEEL CASING PIPE IL 2-4.									

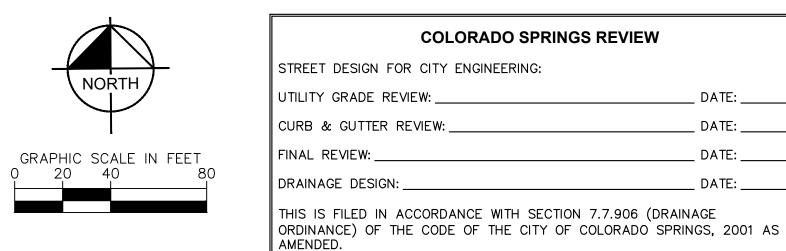

_ DATE: ____


_ DATE: _

Know what's **below**. Call before you dig.


C-603

096668009

SHEET

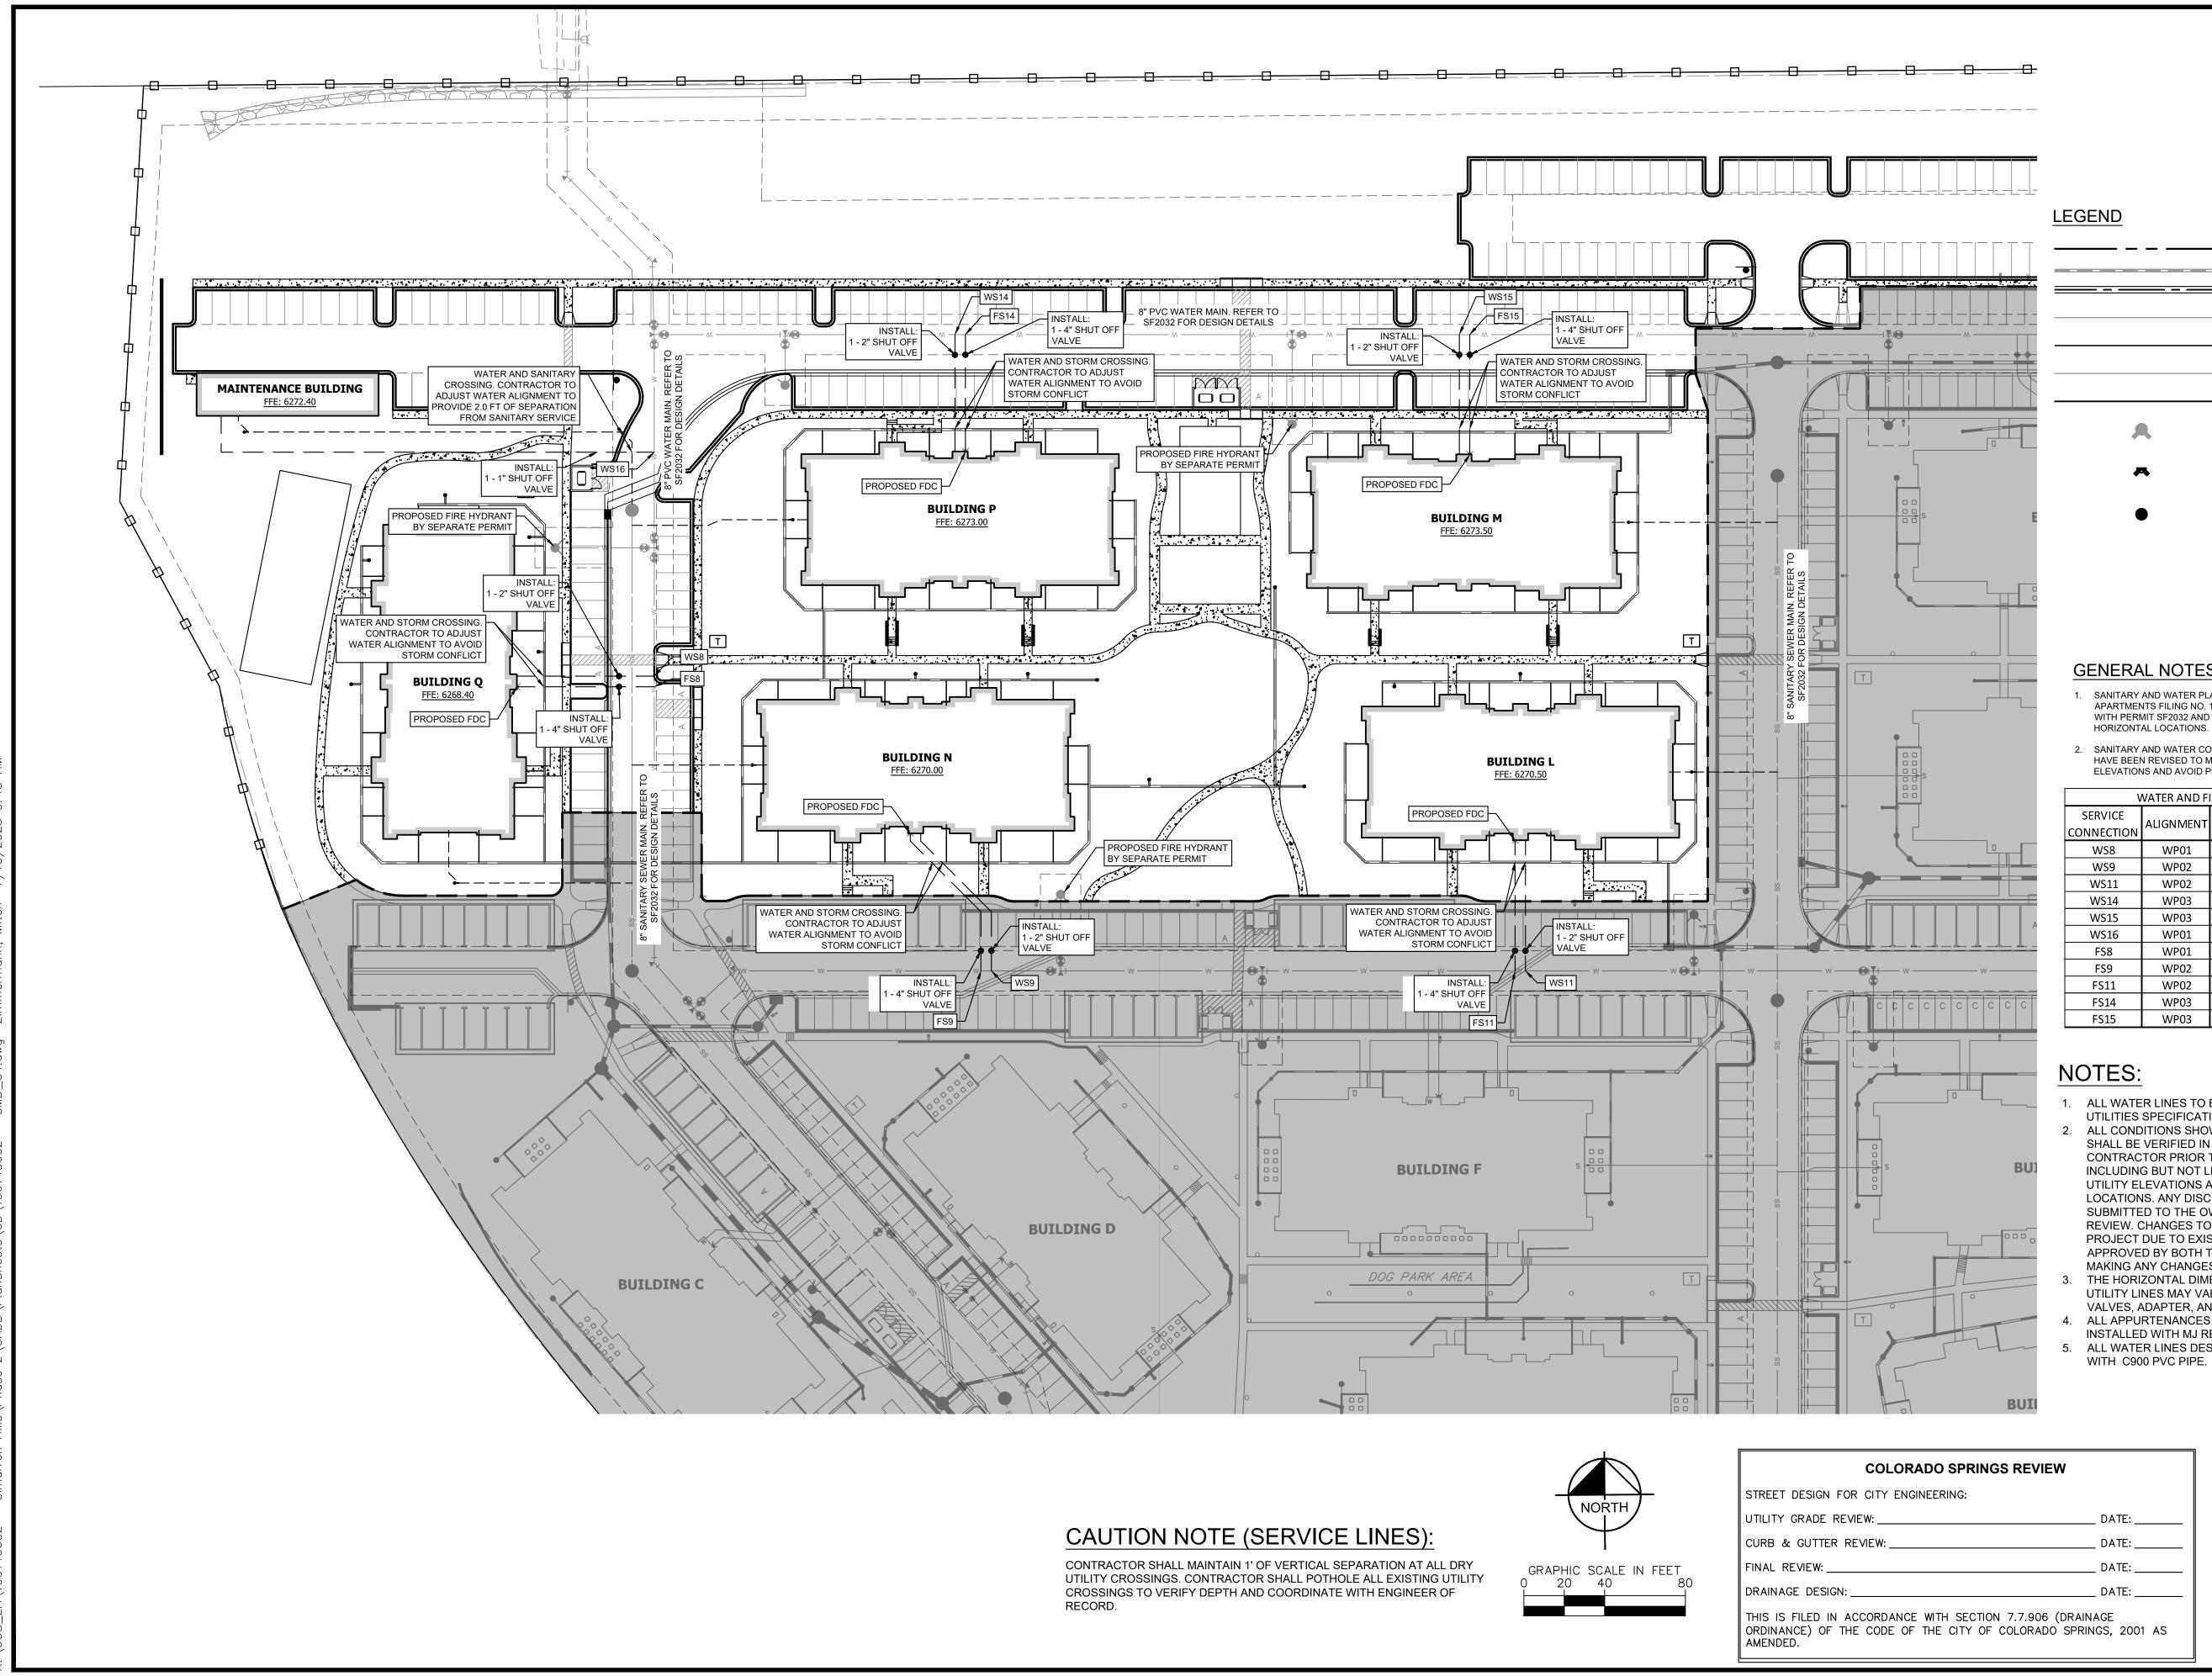

STREET DESIGN FOR CITY EN
UTILITY GRADE REVIEW:
CURB & GUTTER REVIEW:
FINAL REVIEW:
DRAINAGE DESIGN:
THIS IS FILED IN ACCORDANC ORDINANCE) OF THE CODE OI AMENDED.

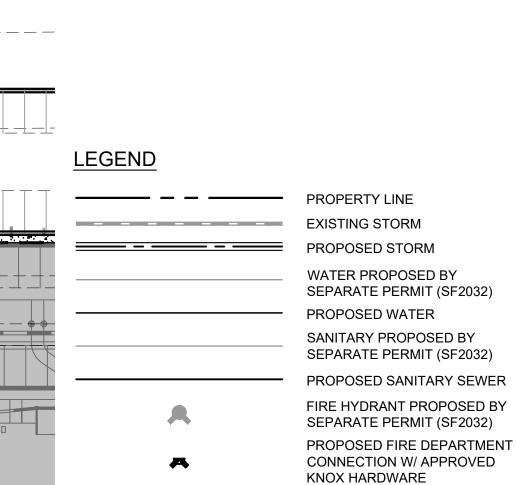

PROPOSED LANDSCAPE AREA DRAIN

PROPOSED VALLEY DRAIN

EXISTING VALLEY DRAIN

GENERAL NOTES

- 1. SANITARY AND WATER PLANS WERE APPROVED WITH SOLACE APARTMENTS FILING NO. 1. REFER TO UTILITY PLANS APPROVED WITH PERMIT SF2032 AND PPR2047 FOR VERTICAL AND
- 2. SANITARY AND WATER CONNECTIONS TO THE APPROVED MAIN HAVE BEEN REVISED TO MATCH PHASE II BUILDING FINISH FLOOR ELEVATIONS AND AVOID PROPOSED STORM.

WATER AND FIRE SERVICE DESIGN TABLE								
SERVICE		STATION	LENGTH	PIPE SIZE/				
CONNECTION	ALIGNMENT			MATERIAL				
WS8	WP01	11+77.42	68 LF	2" HDPE				
WS9	WP02	7+15.59	83 LF	2" HDPE				
WS11	WP02	4+50.98	65 LF	2" HDPE				
WS14	WP03	7+43.35	58 LF	2" HDPE				
WS15	WP03	4+93.48	59 LF	2" HDPE				
WS16	WP01	12+88.39	233 LF	1" HDPE				
FS8	WP01	11+72.18	68 LF	4" PVC				
FS9	WP02	7+20.76	83 LF	4" PVC				
FS11	WP02	4+56.14	65 LF	4" PVC				
FS14	WP03	7+38.18	58 LF	4" PVC				
FS15	WP03	4+88.32	59 LF	4" PVC				

- 1. ALL WATER LINES TO BE BEDDED PER COLORADO SPRINGS UTILITIES SPECIFICATIONS.
- 2. ALL CONDITIONS SHOWN TO BE "EXISTING" OR "ASSUMED" SHALL BE VERIFIED IN THE FIELD BY THE GENERAL CONTRACTOR PRIOR TO START OF CONSTRUCTION INCLUDING BUT NOT LIMITED TO POTHOLING OF EXISTING
- UTILITY ELEVATIONS AT CROSSINGS AND TIE-IN LOCATIONS. ANY DISCREPANCIES SHALL BE NOTED AND SUBMITTED TO THE OWNER AND THE ENGINEER FOR REVIEW. CHANGES TO THE ORIGINAL DESIGN OF THIS PROJECT DUE TO EXISTING SITE CONDITIONS MUST BE APPROVED BY BOTH THE ENGINEER AND OWNER PRIOR TO MAKING ANY CHANGES.
- THE HORIZONTAL DIMENSIONS BETWEEN PROPOSED UTILITY LINES MAY VARY SLIGHTLY BASED ON INSTALLED VALVES, ADAPTER, AND PUMPS.
- ALL APPURTENANCES ON HYDRANT LATERALS SHALL BE INSTALLED WITH MJ RESTRAINTS PER CSU STANDARDS. ALL WATER LINES DESIGNATED PVC TO BE CONSTRUCTED



Call before you dig.

C-604

JJM 03, MVZ12/ #1 SUBMITTAL SUBMITTAL RE - 10 \bigcirc \mathbf{x} ΝŇ DESIGNED BY: MV DRAWN BY: MV CHECKED BY: EJ DATE: 03/10/202 \sim 0 S FILING Ц SERVICE PLAN ARTMENTS AND WATER SE WATER SERVICE P ۵ R 4 ACE 4 ANIT Р S S PROJECT NO. 096668009 SHEET