

INTERMEDIATE TRAFFIC IMPACT STUDY

Filing No. 1 and 2

For

Iron Ridge

El Paso County, Colorado

PCD File No. ~~P2511 and SP253~~

SF2612 and SF2613

August 2025

Revised November 2025

Prepared for:

Atticus Land, LLC

PO Box 88010

Colorado Springs, Colorado 80908

Prepared by:



SM ROCHA, LLC

TRAFFIC & TRANSPORTATION ENGINEERING CONSULTANTS

8700 Turnpike Drive, Suite 240

Westminster, Colorado 80031

(303) 458-9798

6 South Tejon Street, Suite 618

Colorado Springs, Colorado 80903

(719) 203-6639

Project Manager:


Brandon Wilson, EIT

Project Engineer:

Zac Trotter, EIT

Engineer in Responsible Charge:

Fred Lantz, PE

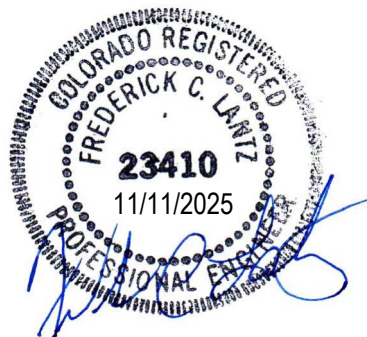

25-052409

Traffic Engineer's Statement

The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.



Fred Lantz, P.E. #23410

11/11/2025

Date

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

Jake Decoto
Atticus Land, LLC
PO Box 88010
Colorado Springs, Colorado 80908

Date

Table of Contents

I. Introduction	1
Project Overview	1
Study Area Boundaries	1
Site Description	1
Existing and Committed Surface Transportation Network	4
II. Existing Traffic Conditions	5
Peak Hour Intersection Levels of Service – Existing Traffic	7
Existing Traffic Analysis Results	7
III. Future Traffic Conditions Without Proposed Development.....	8
Peak Hour Intersection Levels of Service – Background Traffic	10
Background Traffic Analysis Results – Year 2027	10
IV. Proposed Project Traffic	11
Trip Generation	11
Adjustments to Trip Generation Rates	12
Trip Distribution	12
Trip Assignment	12
V. Future Traffic Conditions With Proposed Development.....	14
Total Traffic Auxiliary Lane Analysis	14
Peak Hour Intersection Levels of Service – Total Traffic	16
Total Traffic Analysis Results Upon Development Build-Out	16
VI. Project Impacts	17
Queue Length Analysis	17
Sight Distance Analysis	18
Development Impacts	18
Recommended Improvements	18
VII. Conclusion	19

List of Figures

Figure 1 – Location.....	2
Figure 2 – Preliminary Land Plan	3
Figure 3 – Existing Traffic Volumes & Intersection Geometry	6
Figure 4 – Background Traffic Volumes & Intersection Geometry – Year 2027.....	9
Figure 5 – Distribution and Site-Generated Assignment.....	13
Figure 6 – Total Traffic Volumes & Intersection Geometry – Year 2027	15

List of Tables

Table 1 – Intersection Capacity Analysis Summary – Existing Traffic	7
Table 2 – Intersection Capacity Analysis Summary – Background Traffic – Year 2027	10
Table 3 – Trip Generation Rates	11
Table 4 – Trip Generation Summary	11
Table 5 – Intersection Capacity Analysis Summary – Total Traffic – Year 2027	16
Table 6 – Turn Lane Queues and Storage Requirements – Total Traffic – Year 2027	17

Appendices

APPENDIX A	TRAFFIC COUNT DATA
APPENDIX B	LEVEL OF SERVICE DEFINITIONS
APPENDIX C	CAPACITY WORKSHEETS
APPENDIX D	SIGHT DISTANCE EXHIBIT

I. Introduction

Project Overview

This Intermediate Traffic Impact Study is provided as a planning document and addresses the capacity, geometric, and control requirements associated with the development entitled Iron Ridge. This analysis was prepared in accordance with Appendix B of the County's Engineering Criteria Manual (ECM)¹.

This traffic impact study has been revised to address County review comments made to the August 2025 version of this study regarding a sight distance evaluation, discussion of Stepler Road, and updates to study text, tables, and figures throughout.

This proposed residential development is located south of Walker Road and west of Thompson Road in El Paso County, Colorado.

Study Area Boundaries

The study area to be examined in this analysis encompasses the Walker Road intersections bounded by Brown Road east to Thompson Road.

Figure 1 illustrates location of the site and study intersections.

Site Description

Land for the development is currently vacant and surrounded by residential land uses.

The proposed development is understood to entail the new construction of 30 single-family detached homes.

Access to the development is provided at the following locations: one proposed full-movement access onto Walker Road aligning with Brown Road (referred to as Access A) and one existing full-movement access onto Walker Road via an extension of Colt Court. This extension will also provide access to the adjacent out-parcel. Both access drives will operate independently from the other and each provide access to 15 residential lots.

For purposes of this study, it is anticipated that development construction would be completed by end of Year 2027.

General site and access locations are shown on Figure 1. A preliminary land plan, as prepared by All Terrain Engineering, is shown in Figure 2. This plan is provided for illustrative purposes only.

¹ El Paso County Engineering Criteria Manual, El Paso County, January 9, 2025.



Not to Scale


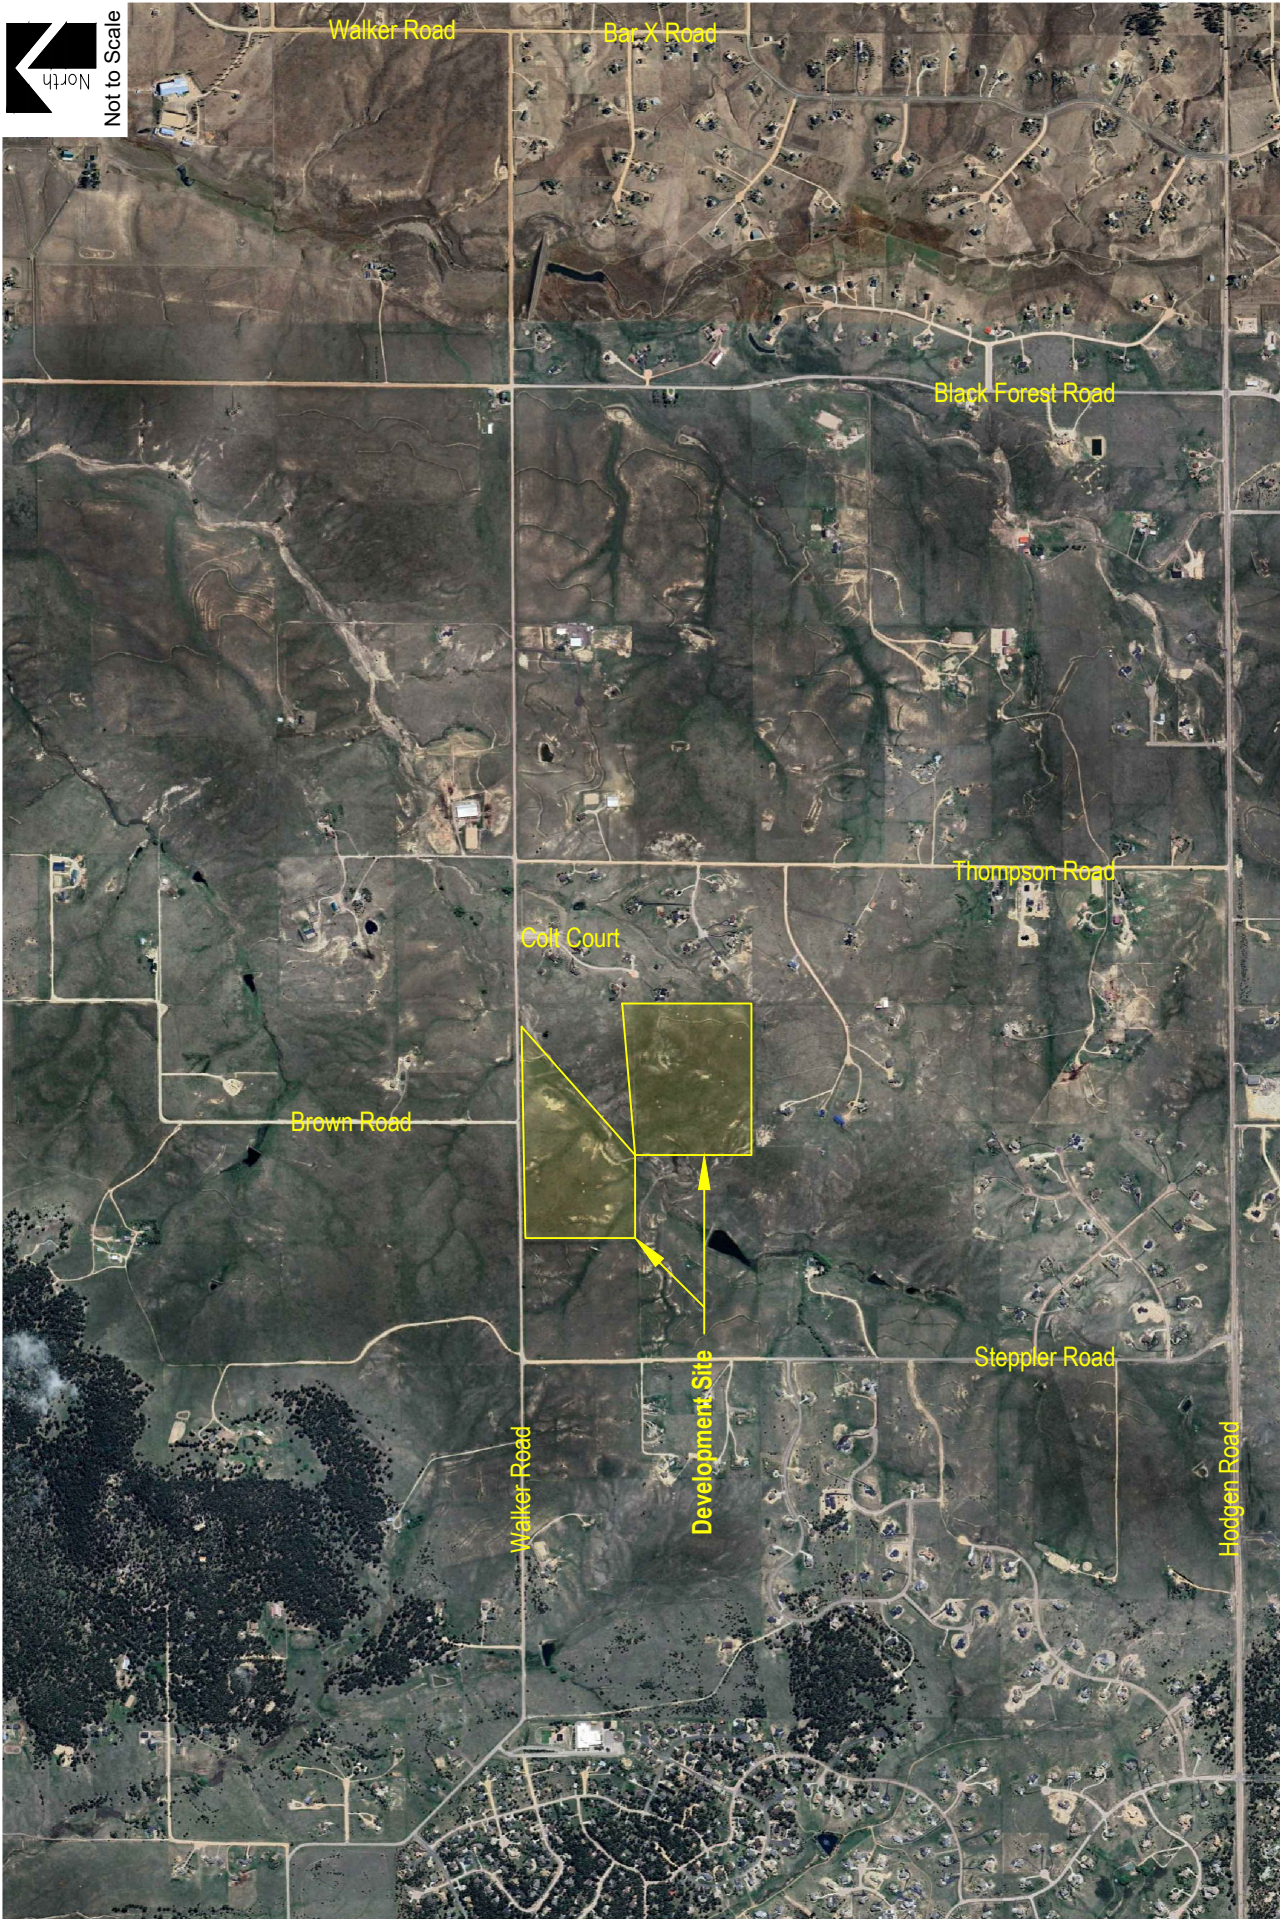


Figure 1
SITE LOCATION





Not to Scale

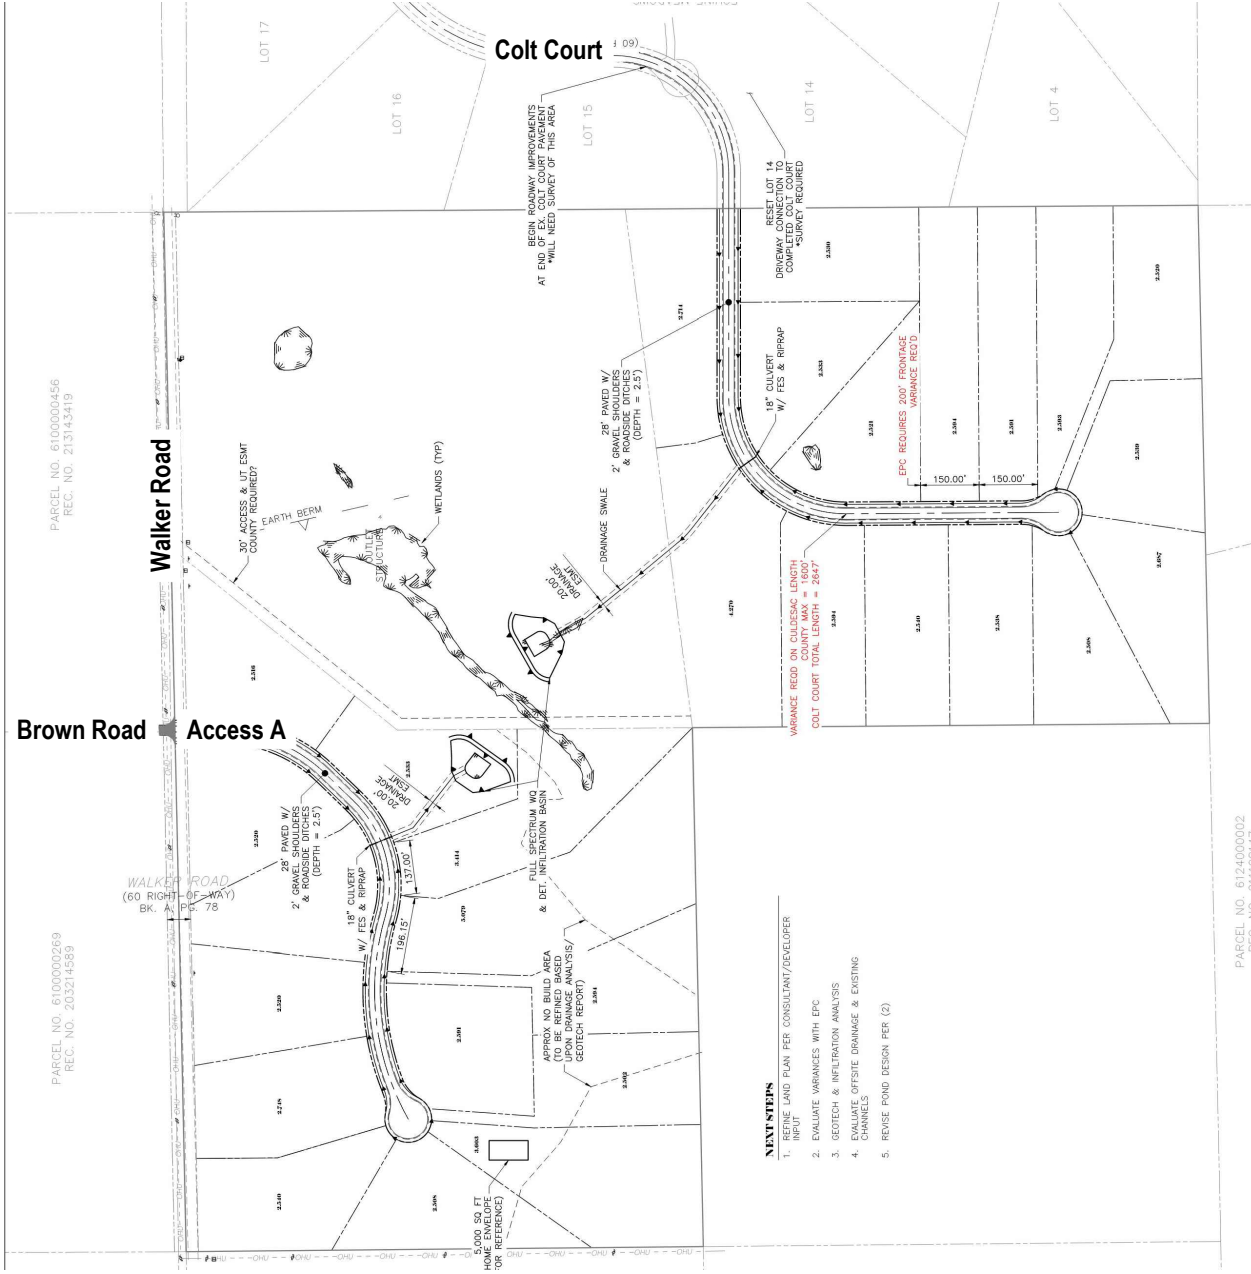

IRON RIDGE
Intermediate Traffic Impact Study
SM ROCHA, LLC
Traffic & Transportation Engineering Consultants

Figure 2
PRELIMINARY LAND PLAN
November 2025
Page 3

Existing and Committed Surface Transportation Network

Within the study area, regional access to the proposed development area is provided by way of Walker Road and Thompson Road while local access is provided via Colt Court and Brown Road. A brief description of each roadway, based on the County's Master Transportation Corridor Plan (MTCP)² and the County's ECM, is provided below:

Walker Road is an east-west rural major collector roadway having two through lanes (one lane in each direction) with shared turn lanes at the intersections within the study area. Walker Road provides a posted speed limit of 45 MPH.

Thompson Road is a north-south rural local roadway having two through lanes (one lane in each direction) with shared turn lanes at the intersection within the study area. Thompson Road provides a posted speed limit of 30 MPH.

Colt Court is a north-south rural local roadway having two through lanes (one lane in each direction) with shared turn lanes at the intersection within the study area. Pursuant to Section 2.3.2 of the County's ECM, Colt Court is assumed to provide a posted speed limit of 30 MPH.

Brown Road is a north-south rural local roadway having two through lanes (one lane in each direction) with shared turn lanes at the intersection within the study area. Pursuant to Section 2.3.2 of the County's ECM, Brown Road is assumed to provide a posted speed limit of 30 MPH.

Steppler Road is a north-south rural local roadway having two through lanes (one lane in each direction) with shared turn lanes. Pursuant to Section 2.3.2 of the County's ECM, Steppler Road is assumed to provide a posted speed limit of 30 mph. Steppler Road is unpaved for an approximate ½ mile stretch south of Walker Road while the remainder of Steppler Road is paved.

All study intersections operate under a stop-controlled condition. A stop-controlled intersection is defined as a roadway intersection where vehicle rights-of-way are controlled by one or more "STOP" signs.

No regional or specific improvements for the above-described roadways are known to be planned or committed at this time. The study area roadways appear to be built to their ultimate cross-sections.

² El Paso County Major Transportation Corridors Plan, Felsburg Holt & Ullevig, July 18, 2024.

II. Existing Traffic Conditions

Morning (AM) and afternoon (PM) peak hour traffic counts were collected at the Walker Road intersections with Thompson Road, Colt Court, and Brown Road. Average daily traffic (ADT) volumes were collected over a 24-hour period on Walker Road. Counts were collected on Tuesday July 15, 2025, with AM peak hour counts being collected during the period of 7:00 a.m. to 9:00 a.m. and PM peak hour counts being collected during the period of 4:00 p.m. to 6:00 p.m.

Existing volumes and intersection geometry are shown in Figure 3. Traffic count data is included for reference in Appendix A.



Not to Scale

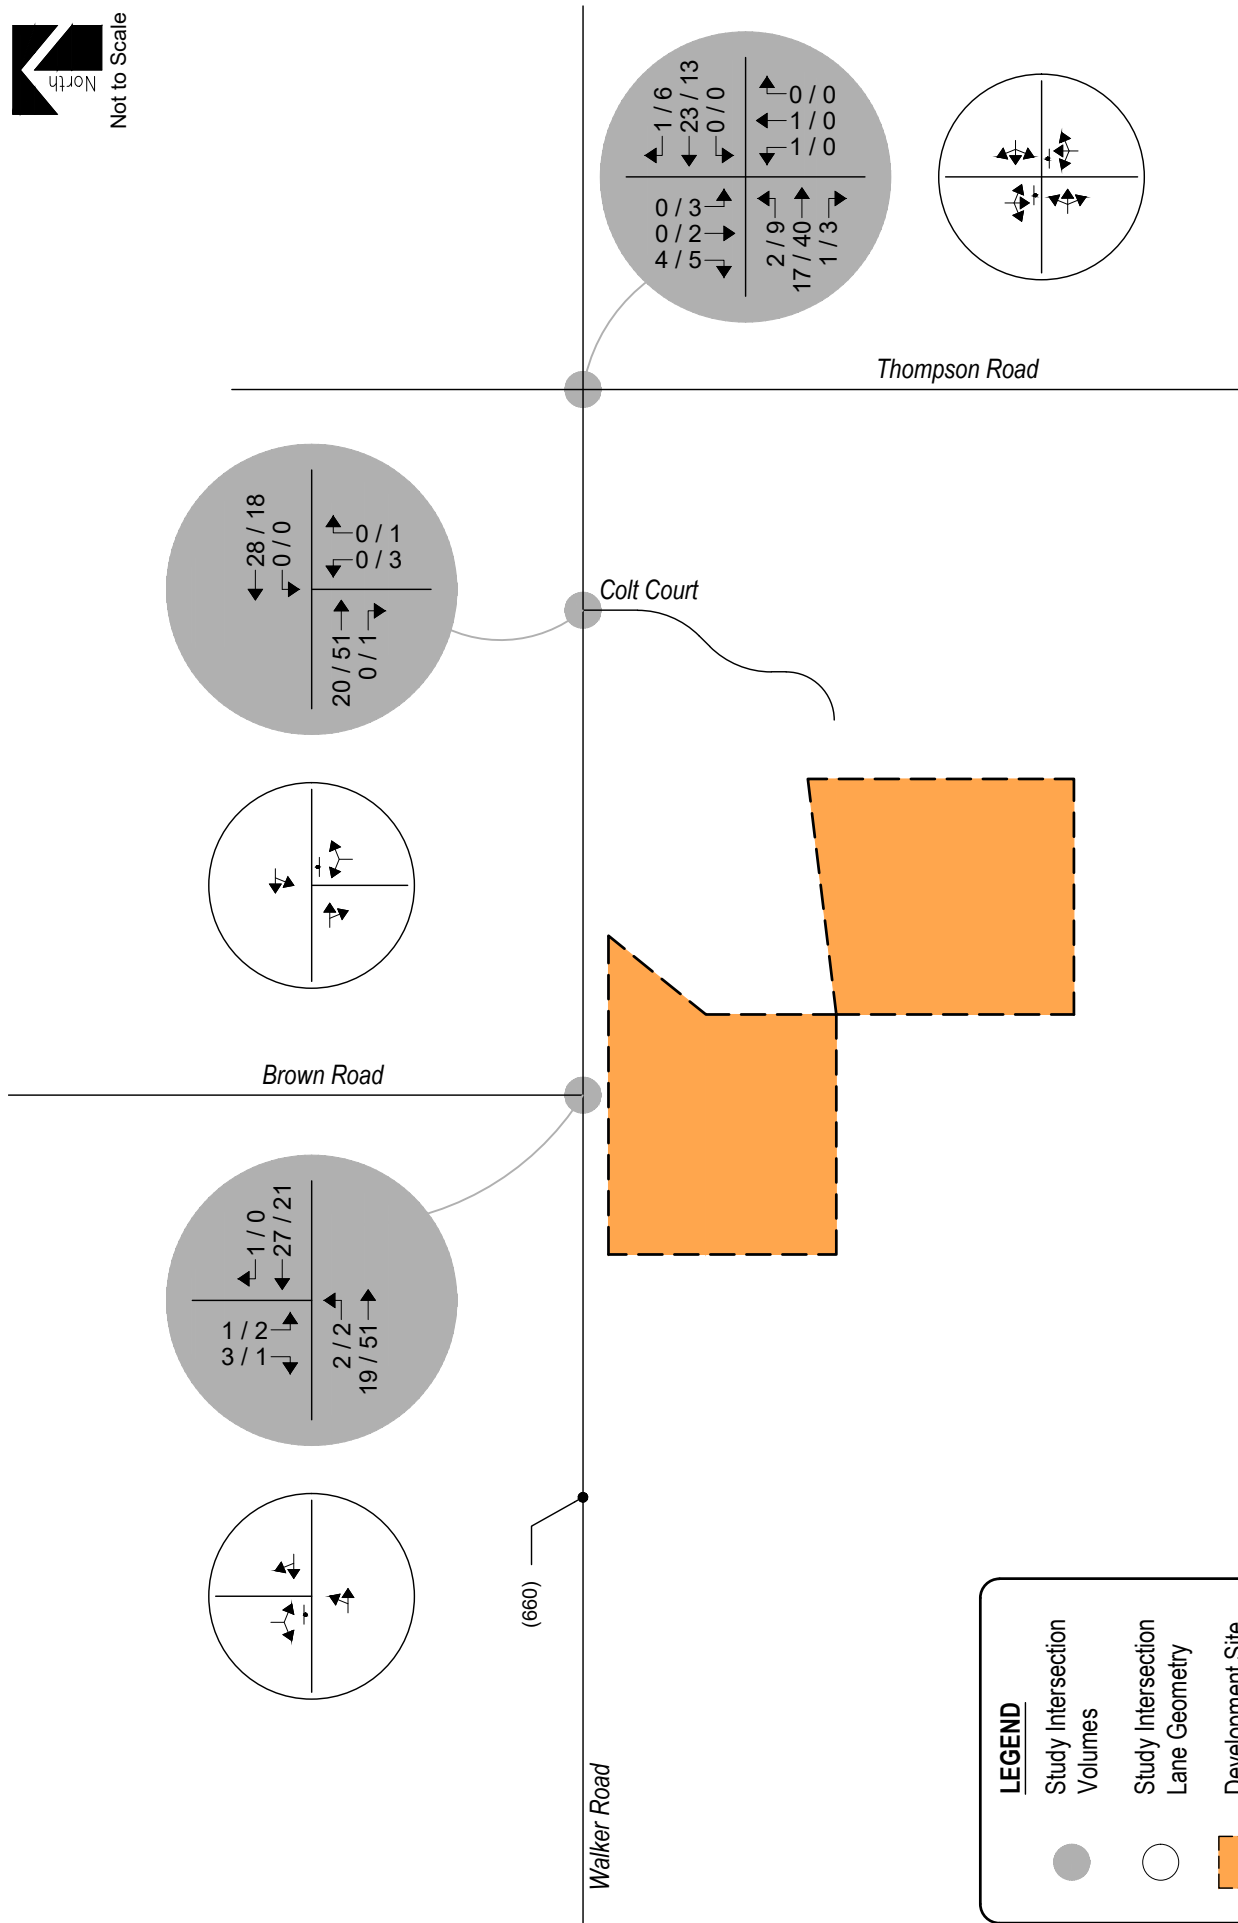


Figure 3

EXISTING TRAFFIC

Volumes & Intersection Geometry
AM / PM Peak Traffic Hour
(ADT) : Average Daily Traffic

IRON RIDGE

Intermediate Traffic Impact Study

SM ROCHA, LLC

Traffic & Transportation Engineering Consultants



Peak Hour Intersection Levels of Service – Existing Traffic

The Unsignalized Intersection Analysis technique, as published in the Highway Capacity Manual (HCM), 7th Edition, by the Transportation Research Board and as incorporated into the SYNCHRO computer program, was used to analyze the study intersections for existing and future traffic conditions. This nationally accepted technique allows for the determination of intersection level of service (LOS) based on the congestion and delay of each traffic movement.

Pursuant to Section B.4.1.A of the County's ECM, the design objective for each scenario of this study shall be level of service "D". Level of service is a method of measurement used by transportation professionals to quantify a driver's perception of travel conditions that include travel time, number of stops, and total amount of stopped delay experienced on a roadway network. The HCM categorizes level of service into a range from "A" which indicates little, if any, vehicle delay, to "F" which indicates a level of operation considered unacceptable to most drivers. These levels of service grades with brief descriptions of the operating condition, for unsignalized and signalized intersections, are included for reference in Appendix B and have been used throughout this study.

The level of service analyses results for existing conditions are summarized in Table 1.

Intersection capacity worksheets developed for this study are provided in Appendix C.

Table 1 – Intersection Capacity Analysis Summary – Existing Traffic

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
Walker Road / Thompson Road (Stop-Controlled) Eastbound Left, Through and Right Westbound Left, Through and Right Northbound Left, Through and Right Southbound Left, Through and Right	A A A A	A A A A
Walker Road / Colt Court (Stop-Controlled) Westbound Left and Through Northbound Left and Right	A A	A A
Walker Road / Brown Road (Stop-Controlled) Eastbound Left and Through Southbound Left and Right	A A	A A

Key: Stop-Controlled Intersection: Level of Service

Existing Traffic Analysis Results

Under existing conditions, operational analysis shows the unsignalized intersections within the study area have turning movement operations at LOS A during the morning and afternoon peak traffic hours.

III. Future Traffic Conditions Without Proposed Development

Background traffic is the traffic projected to be on area roadways without consideration of the proposed development. Background traffic includes traffic generated by development of vacant parcels in the area.

To account for projected increases in background traffic for Year 2027, a compounded annual growth rate was determined using population growth estimates provided by El Paso County's MTCP which anticipates a 10-year growth rate between one and two percent. Therefore, an annual growth rate of two percent was applied to existing traffic volumes. This annual growth rate provides for a conservative analysis.


It is important to note that ingress and egress traffic volumes at the Walker Road intersections with Colt Court and Brown Road are not subject to annual growth patterns since these access drives do not provide connection to other roadways, therefore do not serve regional traffic.

Pursuant to the area roadway improvements discussed in Section I, Year 2027 background traffic conditions assume no roadway improvements to accommodate regional transportation demands.

Projected background traffic volumes and intersection geometry for Year 2027 are shown in Figure 4.



Not to Scale

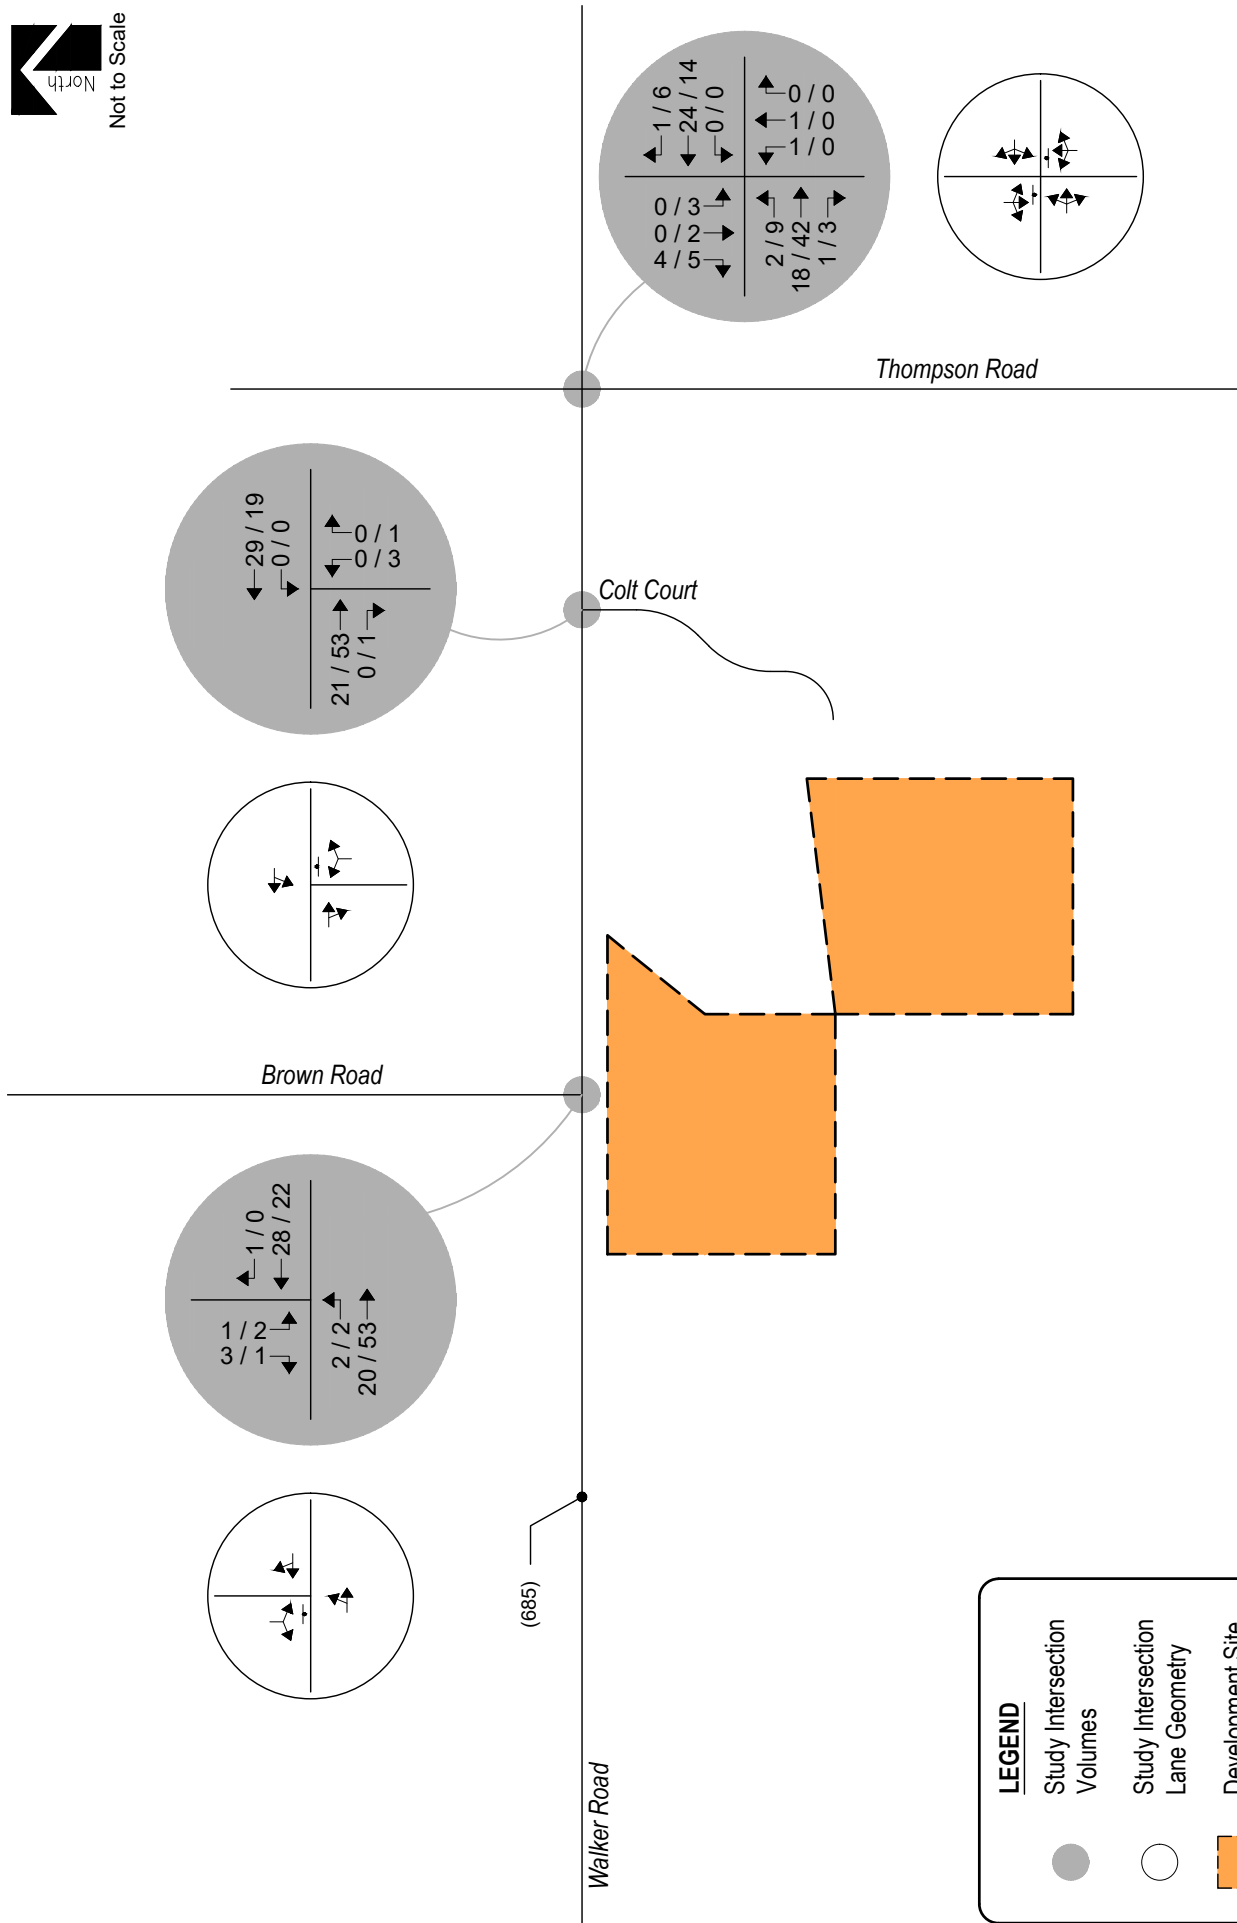

LEGEND

Study Intersection Volumes

Study Intersection Lane Geometry

Development Site

Figure 4
BACKGROUND TRAFFIC - YEAR 2027
Volumes & Intersection Geometry
AM / PM Peak Traffic Hour
(ADT) : Average Daily Traffic

Peak Hour Intersection Levels of Service – Background Traffic

As with existing traffic conditions, the operations of study intersections were analyzed under background conditions, without the proposed development, using the SYNCHRO computer program.

Background traffic level of service analysis results for Year 2027 are listed in Table 2.

Definitions of levels of service are given in Appendix B. Intersection capacity worksheets are provided in Appendix C.

Table 2 – Intersection Capacity Analysis Summary – Background Traffic – Year 2027

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
Walker Road / Thompson Road (Stop-Controlled)		
Eastbound Left, Through and Right	A	A
Westbound Left, Through and Right	A	A
Northbound Left, Through and Right	A	A
Southbound Left, Through and Right	A	A
Walker Road / Colt Court (Stop-Controlled)		
Westbound Left and Through	A	A
Northbound Left and Right	A	A
Walker Road / Brown Road (Stop-Controlled)		
Eastbound Left and Through	A	A
Southbound Left and Right	A	A

Key: Stop-Controlled Intersection: Level of Service

Background Traffic Analysis Results – Year 2027

Year 2027 background traffic analysis indicates that the unsignalized intersections within the study area are expected to provide turning movement operations at LOS A during the morning and afternoon peak traffic hours.

These intersection operations are similar to existing conditions.

IV. Proposed Project Traffic

Trip Generation

Standard traffic generation characteristics compiled by the Institute of Transportation Engineers (ITE) in their report entitled Trip Generation Manual, 11th Edition, were applied to the proposed land use in order to estimate average daily traffic (ADT), AM Peak Hour, and PM Peak Hour vehicle trips. A vehicle trip is defined as a one-way vehicle movement from a point of origin to a point of destination.

The ITE land use code 210 (Single-Family Detached Housing) was used for estimating trip generation because of its conservative rates and best fit to the proposed land use description.

Trip generation rates used in this study are presented in Table 3.

Table 3 – Trip Generation Rates

ITE CODELAND USEUNIT			TRIP GENERATION RATES						
			24 HOUR	AM PEAK HOUR			PM PEAK HOUR		
				ENTER	EXIT	TOTAL	ENTER	EXIT	TOTAL
210	Single-Family Detached Housing	DU	9.43	0.18	0.53	0.70	0.59	0.35	0.94

Key: DU = Dwelling Units.

Note: All data and calculations above are subject to being rounded to nearest value.

Table 4 illustrates projected ADT, AM Peak Hour, and PM Peak Hour traffic volumes likely generated by the proposed development upon build-out.

Table 4 – Trip Generation Summary

ITE CODELAND USESIZE				TOTAL TRIPS GENERATED						
				24 HOUR	AM PEAK HOUR			PM PEAK HOUR		
					ENTER	EXIT	TOTAL	ENTER	EXIT	TOTAL
210	Single-Family Detached Housing	30	DU	283	5	16	21	18	10	28
Total:				283	5	16	21	18	10	28

Key: DU = Dwelling Units.

Note: All data and calculations above are subject to being rounded to nearest value.

Upon build-out, Table 4 illustrates that the proposed development has the potential to generate approximately 283 daily vehicle trips with 21 of those occurring during the morning peak hour and 28 during the afternoon peak hour.

Adjustments to Trip Generation Rates

A development of this type is not likely to attract trips from within area land uses nor pass-by or diverted link trips from the adjacent roadway system, therefore no trip reduction was taken in this analysis.

Trip Distribution

The overall directional distribution of site-generated traffic was determined based on the location of development site within the County, proposed and existing area land uses, allowed turning movements, available roadway network, and in reference to historical traffic count data provided by the Colorado Department of Transportation's (CDOT) Traffic Count Database System³ (TCDS).

Overall trip distribution patterns for the development are shown on Figure 5.

Trip Assignment


Trip assignment is how generated and distributed vehicle trips are expected to be loaded onto the available roadway network.

Applying trip distribution patterns to site-generated traffic provides the overall site-generated trip assignments shown on Figure 5.

³ Transportation Data Management System, MS2, 2022.



Not to Scale

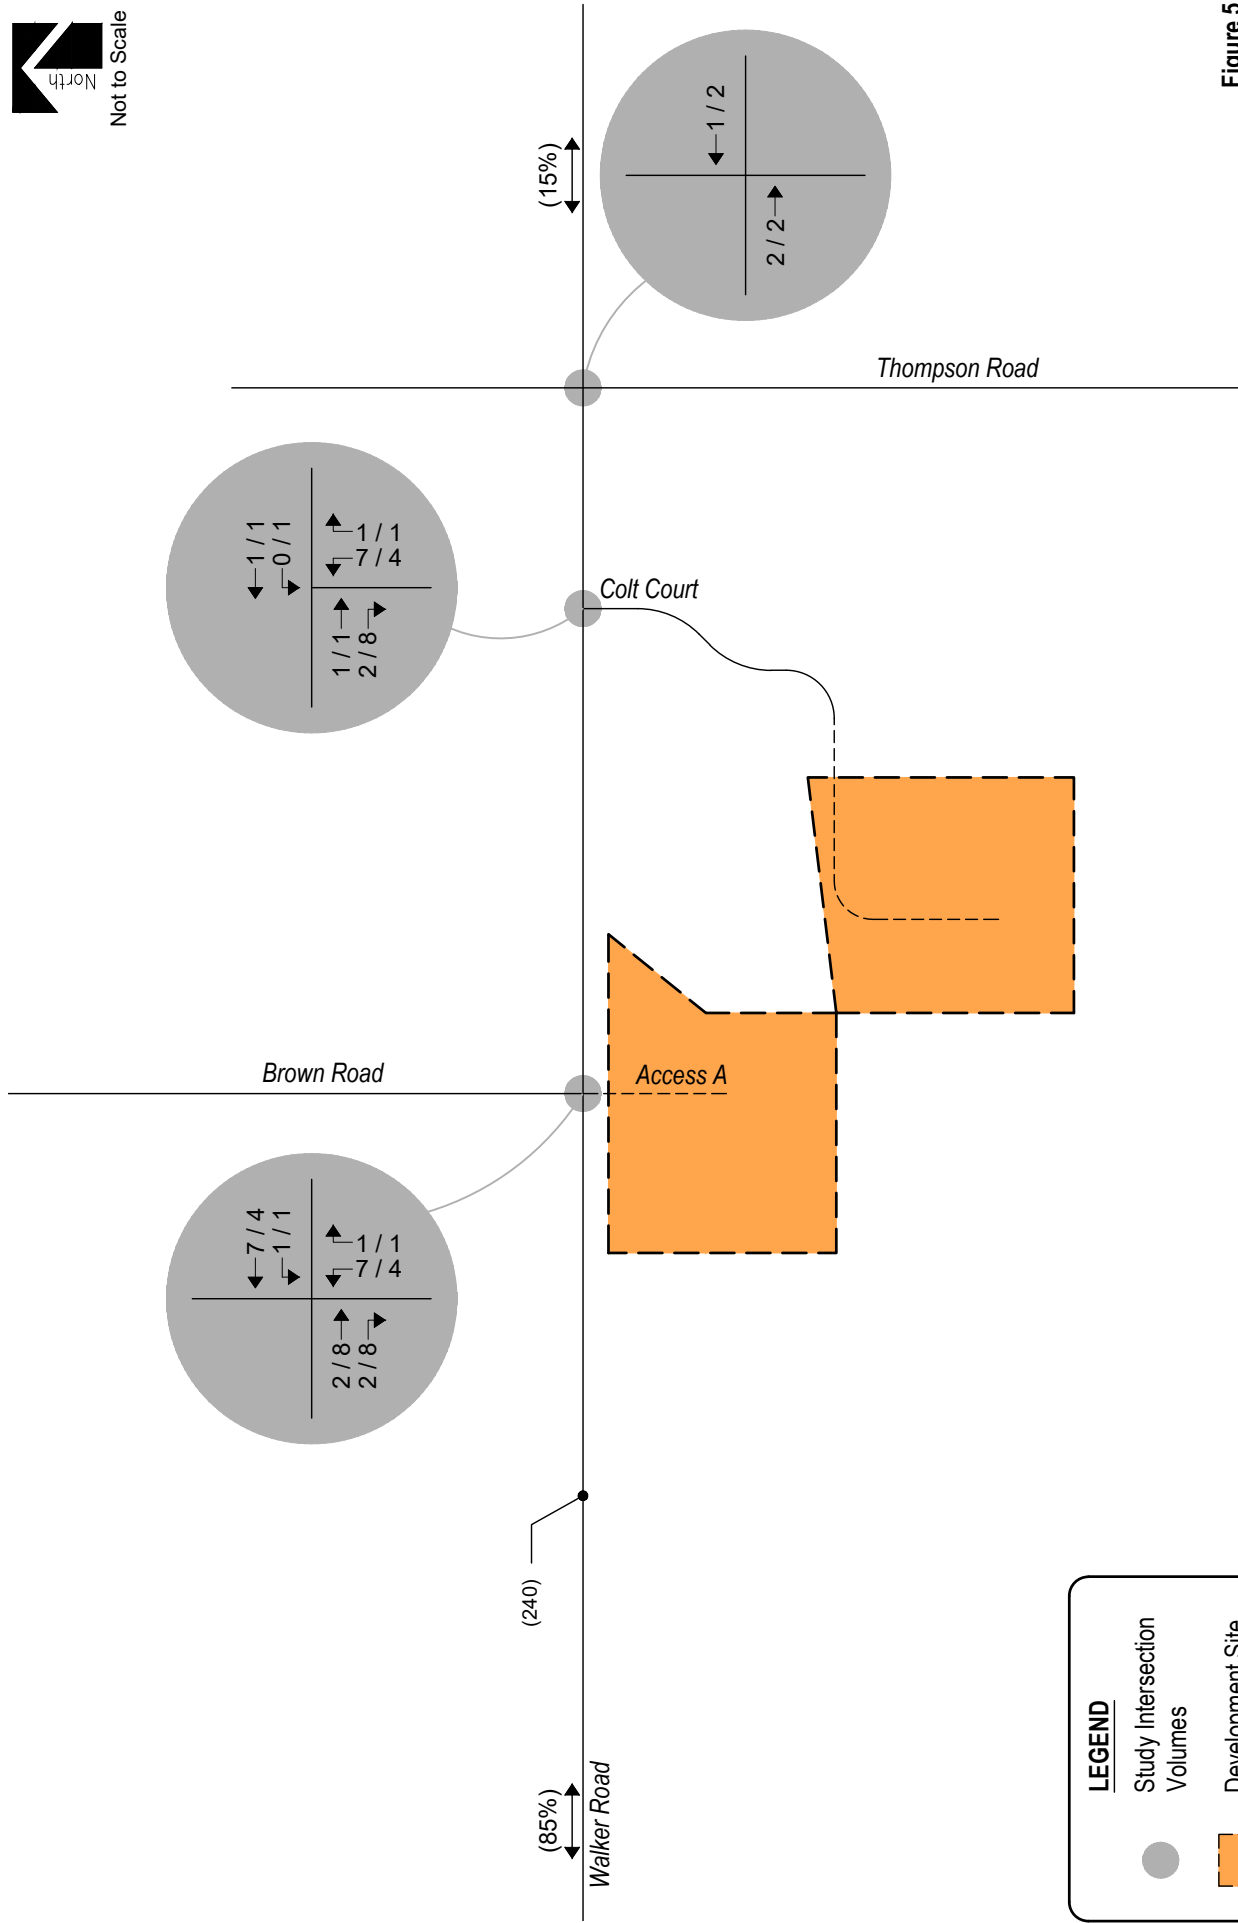

LEGEND

- Study Intersection Volumes
- Development Site

Figure 5
SITE DEVELOPMENT DISTRIBUTION
(%) : Overall
SITE-GENERATED TRIPS
AM / PM Peak Hour
(ADT) : Average Daily Traffic

V. Future Traffic Conditions With Proposed Development

Total traffic is the traffic projected to be on area roadways with consideration of the proposed development. Total traffic includes background traffic projections for Year 2027 with consideration of site-generated traffic. For analysis purposes, it was assumed that development construction would be completed by end of Year 2027.

Pursuant to area roadway improvement discussions provided in Section III, Year 2027 total traffic conditions assume no roadway improvements to accommodate regional transportation demands. This assumption provides for a conservative analysis. Roadway improvements associated with site development are expected to be limited to site access and frontage as required by the governing agency.

Total Traffic Auxiliary Lane Analysis


Auxiliary lanes for site development access drives were evaluated and are to be based on the County's ECM.

Considering development build-out, an evaluation of auxiliary lane requirements, pursuant to Section 2.3.7.D of the County's ECM indicates that westbound left turn deceleration lanes are not required along Walker Road at Colt Court nor Access A since the development projected peak hour left turn ingress volume does not exceed the County's threshold of 25 vehicles per hour (vph). Additionally, eastbound right turn deceleration lanes are not required along Walker Road at Colt Court nor Access A since the development's projected peak hour right turn ingress volume does not exceed the County's threshold of 50 vph.

Projected Year 2027 total traffic volumes and intersection geometry are shown in Figure 6.



Not to Scale

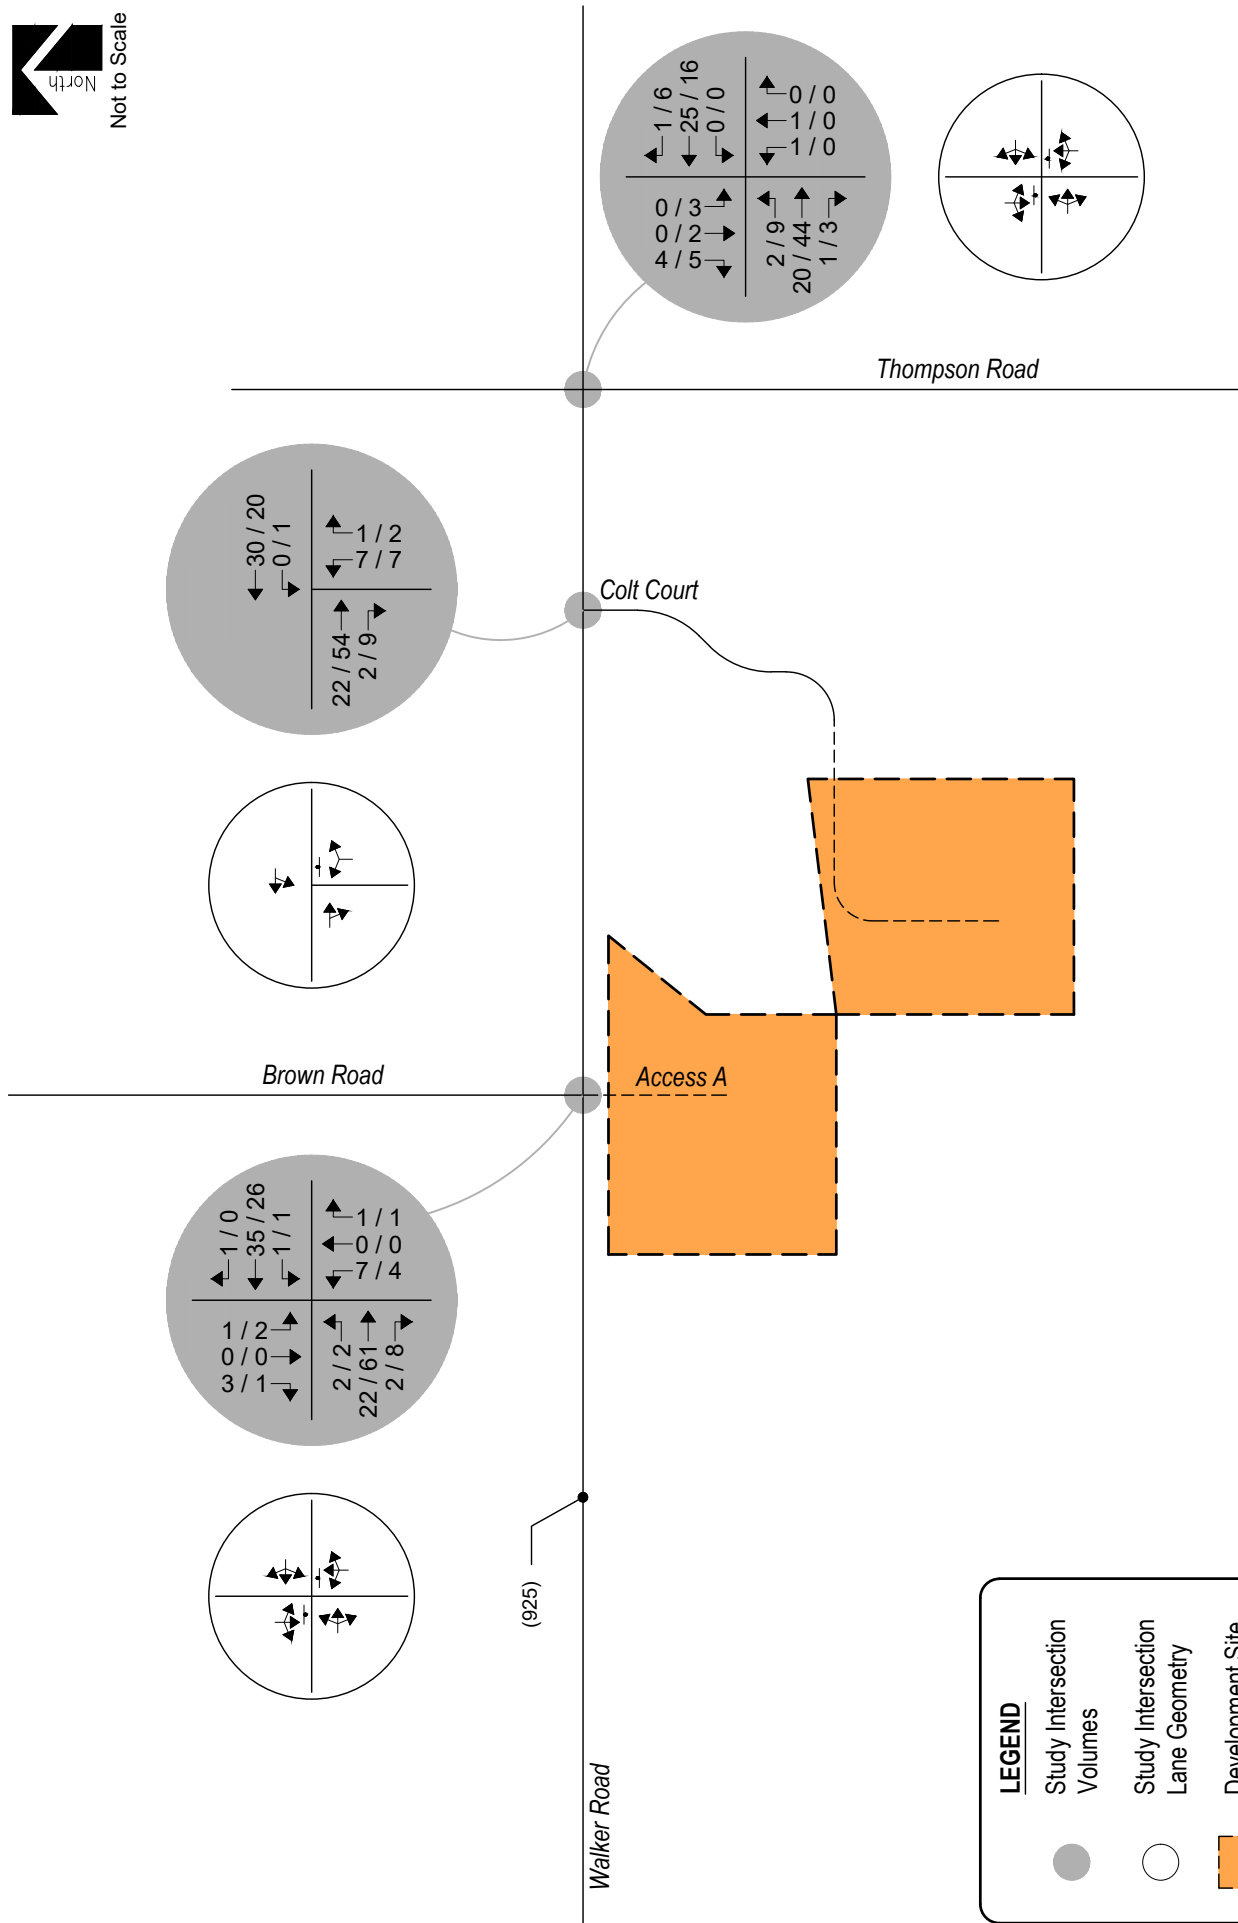

LEGEND

- Study Intersection Volumes
- Study Intersection Lane Geometry
- Development Site

Figure 6
TOTAL TRAFFIC - YEAR 2027
Volumes & Intersection Geometry
AM / PM Peak Traffic Hour
(ADT) : Average Daily Traffic

Peak Hour Intersection Levels of Service – Total Traffic

As with background traffic, the operations of the study intersections were analyzed under projected total traffic conditions using the SYNCHRO computer program. The analyses and procedures were performed in accordance with the latest HCM and are based upon the worst-case conditions that occur during a typical weekday upon build-out of site development and analyzed land uses. Therefore, study intersections are likely to operate with traffic conditions better than those described within this study, which represent the peak hours of weekday operations only.

Total traffic level of service analysis results for Years 2027 are summarized in Table 5.

Definitions of levels of service are given in Appendix B. Intersection capacity worksheets are provided in Appendix C.

Table 5 – Intersection Capacity Analysis Summary – Total Traffic – Year 2027

INTERSECTION LANE GROUPS	LEVEL OF SERVICE	
	AM PEAK HOUR	PM PEAK HOUR
Walker Road / Thompson Road (Stop-Controlled)		
Eastbound Left, Through and Right	A	A
Westbound Left, Through and Right	A	A
Northbound Left, Through and Right	A	A
Southbound Left, Through and Right	A	A
Walker Road / Colt Court (Stop-Controlled)		
Westbound Left and Through	A	A
Northbound Left and Right	A	A
Walker Road / Brown Road (Stop-Controlled)		
Eastbound Left and Through	A	A
Southbound Left and Right	A	A

Key: Stop-Controlled Intersection: Level of Service

Total Traffic Analysis Results Upon Development Build-Out

Table 5 illustrates how, by Year 2027 and upon development build-out, the unsignalized intersections within the study area are expected to maintain turning movement operations at LOS A during the morning and afternoon peak traffic hours.

These intersection operations are similar to background conditions.

VI. Project Impacts

It is emphasized that the analyses and procedures described in this study were performed in accordance with the latest HCM and are based upon the worst-case conditions that occur during a typical weekday upon build-out of site development and analyzed land uses. Therefore, study intersections are likely to operate with traffic conditions better than those described within this study, which represent the peak hours of weekday operations only.

Queue Length Analysis

Queue lengths for the study intersections were analyzed using Year 2027 background and total traffic conditions. The analysis yields estimate of 95th percentile queue lengths, which have only a five percent probability of being exceeded during the analysis time period. An average vehicle length of 25 feet was assumed. Queue lengths were modeled and are included with the Synchro worksheets in Appendix C.

Table 6 summarizes the 95th percentile queue results in comparison to the projected storage requirements for turn movements within study area for Year 2027.

Table 6 – Turn Lane Queues and Storage Requirements – Total Traffic – Year 2027

Intersection	Turn Movement		Existing Turn Lane Length (feet)	Background 2027		Total 2027		Recommended
				AM Peak Hour (feet)	PM Peak Hour (feet)	AM Peak Hour (feet)	PM Peak Hour (feet)	Turn Lane Length (feet)
Stop-Controlled Intersections								
Walker Road / Thompson Road	EB	L,T,R	-	0'	0'	0'	0'	-
	WB	L,T,R	-	0'	0'	0'	0'	-
	NB	L,T,R	-	0'	0'	0'	0'	-
	SB	L,T,R	-	0'	0'	0'	0'	-
Walker Road / Colt Court	EB	L,T	-	0'	0'	0'	0'	-
	WB	T,R	-	0'	0'	0'	0'	-
	NB	L,R	-	0'	0'	0'	0'	-
Walker Road / Brown Road / Access A	EB	L,T,R	-	0'	0'	0'	0'	-
	WB	L,T,R	-	0'	0'	0'	0'	-
	NB	L,T,R	-	-	-	0'	0'	-
	SB	L,T,R	-	0'	0'	0'	0'	-

Note: Turn Lane Length does not include taper length.

As Table 6 shows, no vehicular queues are projected at the study area intersections.

Sight Distance Analysis

Sight distance lengths for Access A and Colt Court were analyzed using Section 2.3, Table 2-21 of the County's ECM.

Considering the land use of the proposed development, the posted speed limit along Walker Road, and the roadway geometry along Walker Road, Access A must provide an entering sight distance of 555 feet. A sight distance exhibit is provided for reference in Appendix D.

Development Impacts

Analysis of future traffic conditions indicates that the addition of site-generated traffic is expected to create no negative impact to traffic operations for the existing and surrounding roadway system upon roadway and intersection control improvements assumed within this analysis. With all conservative assumptions defined in this analysis, the study intersections are projected to operate at future levels of service comparable to Year 2027 background traffic conditions.

Recommended Improvements

Roadway and intersection improvement recommendations were assessed pursuant to roadway descriptions discussed in Section I, projected peak hour traffic volumes, level of service results, projected 95th percentile queue lengths, and per requirements defined within the County's ECM.

In review of the future ADT along Walker Road, as illustrated in Figure 6 (925 vehicles trips per day), it is recommended that Walker Road continue to provide its rural major collector classification with a 90-foot right-of-way (ROW).

When considering Year 2027 total traffic conditions, no public improvements to the surrounding roadway network were identified to be needed, therefore none are being recommended with this development.

Pursuant to Section B.8 of the County's ECM, below is a list of traffic and/or transportation related deviation requests associated with the proposed Iron Ridge development:

1. Section 2.3.8 describes how cul-de-sacs shall have a minimum radius of 50 feet and a maximum length of 1,600 feet for rural conditions be designed in conformance with Figure 2-31. The maximum length of cul-de-sac shall be measured from the right-of-way of the intersecting street to the center of the cul-de-sac bulb. Hammerhead turnarounds are not permitted as permanent roadway terminations.

The proposed extension of Colt Court is proposed to be approximately 2,647 feet in length.

VII. Conclusion

This Intermediate Traffic Impact Study addressed the capacity, geometric, and control requirements associated with the development entitled Iron Ridge. This proposed residential development consists of 30 single-family detached homes. The development is located south of Walker Road and west of Thompson Road in El Paso County, Colorado.

The study area to be examined in this analysis encompassed the Walker Road intersections bounded by Brown Road east to Thompson Road.

Analysis was conducted for critical AM Peak Hour and PM Peak Hour traffic operations for existing traffic conditions, Year 2027 background traffic conditions, and Year 2027 total traffic conditions.

Analysis of existing traffic conditions indicates that all unsignalized intersections provide turning movement operations at LOS A.

Under Year 2027 background traffic conditions, operational analysis shows that all stop-controlled intersections anticipate turn movement operations at than LOS A during their respective peak traffic periods.

Analysis of future traffic conditions indicates that the addition of site-generated traffic is expected to create no negative impact to traffic operations for the existing and surrounding roadway system upon roadway and intersection control improvements assumed within this analysis. With all conservative assumptions defined in this analysis, the study intersections are projected to operate at future levels of service comparable to Year 2027 background traffic conditions. Proposed site accesses have long-term operations at LOS A during peak traffic periods and upon build-out.

APPENDIX A

Traffic Count Data



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 1 BROWN RD & WALKER RD AM

Date: Tuesday, July 15, 2025


Peak Hour: 07:45 AM - 08:45 AM

Peak 15-Minutes: 07:45 AM - 08:00 AM


Peak Hour - Motorized Vehicles

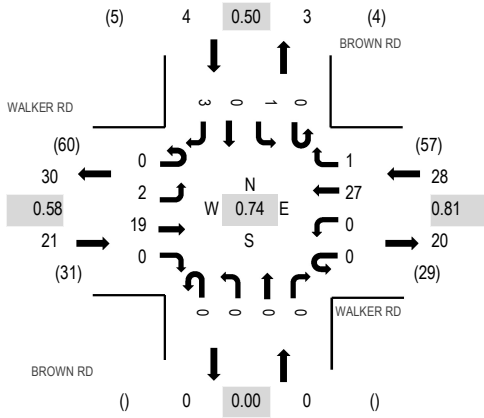

Peak Hour - Bicycles

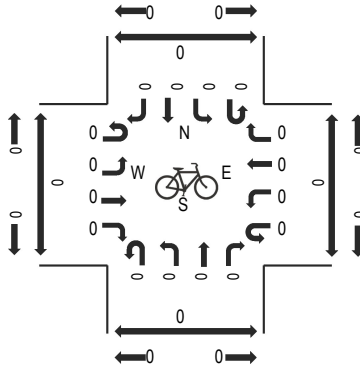

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	WALKER RD Eastbound				WALKER RD Westbound				BROWN RD Northbound				BROWN RD Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
7:00 AM	0	0	1	0	0	0	7	0	0	0	0	0	0	0	0	1	9	47	0	0	0	0
7:15 AM	0	0	3	0	0	0	9	0	0	0	0	0	0	0	0	0	12	46	0	0	0	0
7:30 AM	0	0	3	0	0	0	5	0	0	0	0	0	0	0	0	0	8	50	0	0	0	0
7:45 AM	0	0	9	0	0	0	8	0	0	0	0	0	0	0	0	1	18	53	0	0	0	0
8:00 AM	0	0	2	0	0	0	4	1	0	0	0	0	0	0	0	1	8	46	0	0	0	0
8:15 AM	0	1	4	0	0	0	9	0	0	0	0	0	0	1	0	1	16		0	0	0	0
8:30 AM	0	1	4	0	0	0	6	0	0	0	0	0	0	0	0	0	11		0	1	0	0
8:45 AM	0	1	2	0	0	0	8	0	0	0	0	0	0	0	0	0	11		0	0	0	0
Count Total	0	3	28	0	0	0	56	1	0	0	0	0	0	1	0	4	93		0	1	0	0
Peak Hour	0	2	19	0	0	0	27	1	0	0	0	0	0	1	0	3	53		0	1	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 1 BROWN RD & WALKER RD PM

Date: Tuesday, July 15, 2025


Peak Hour: 04:15 PM - 05:15 PM

Peak 15-Minutes: 04:45 PM - 05:00 PM


Peak Hour - Motorized Vehicles

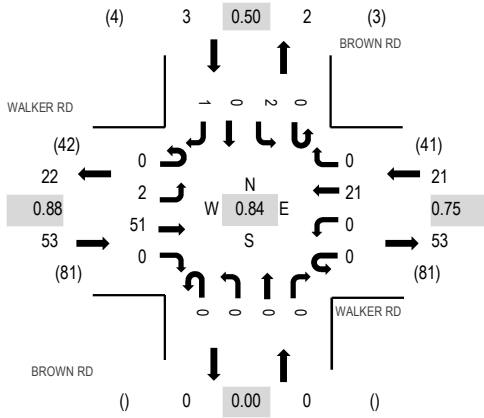

Peak Hour - Bicycles

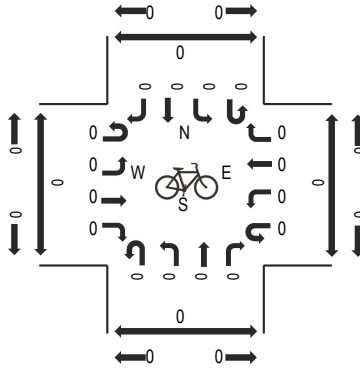

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	WALKER RD Eastbound				WALKER RD Westbound				BROWN RD Northbound				BROWN RD Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
4:00 PM	0	0	6	0	0	0	7	0	0	0	0	0	0	0	0	0	13	70	0	0	0	0
4:15 PM	0	1	12	0	0	0	6	0	0	0	0	0	0	0	0	0	19	77	0	0	0	0
4:30 PM	0	0	10	0	0	0	3	0	0	0	0	0	0	2	0	0	15	67	0	0	0	0
4:45 PM	0	1	14	0	0	0	8	0	0	0	0	0	0	0	0	0	23	65	0	0	0	0
5:00 PM	0	0	15	0	0	0	4	0	0	0	0	0	0	0	0	1	20	56	0	0	0	0
5:15 PM	0	1	4	0	0	0	3	0	0	0	0	0	0	1	0	0	9		0	0	0	0
5:30 PM	0	0	7	0	0	0	6	0	0	0	0	0	0	0	0	0	13		0	0	0	0
5:45 PM	0	0	10	0	0	0	4	0	0	0	0	0	0	0	0	0	14		0	0	0	0
Count Total	0	3	78	0	0	0	41	0	0	0	0	0	0	3	0	1	126		0	0	0	0
Peak Hour	0	2	51	0	0	0	21	0	0	0	0	0	0	2	0	1	77		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 2 COLT CT & WALKER RD AM

Date: Tuesday, July 15, 2025


Peak Hour: 07:45 AM - 08:45 AM

Peak 15-Minutes: 07:45 AM - 08:00 AM


Peak Hour - Motorized Vehicles

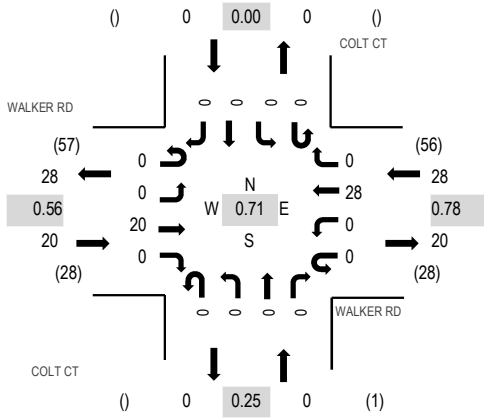

Peak Hour - Bicycles

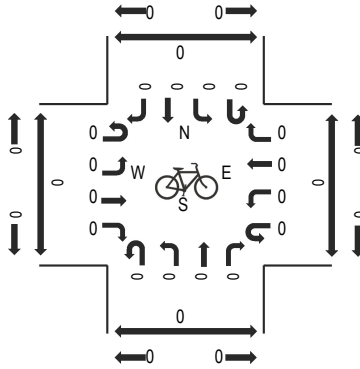

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	WALKER RD Eastbound				WALKER RD Westbound				COLT CT Northbound				COLT CT Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
7:00 AM	0	0	1	0	0	0	6	0	0	1	0	0	0	0	0	0	8	45	0	0	0	0
7:15 AM	0	0	3	0	0	0	9	0	0	0	0	0	0	0	0	0	12	44	0	0	0	0
7:30 AM	0	0	3	0	0	0	5	0	0	0	0	0	0	0	0	0	8	46	0	0	0	0
7:45 AM	0	0	9	0	0	0	8	0	0	0	0	0	0	0	0	0	17	48	0	0	0	0
8:00 AM	0	0	2	0	0	0	5	0	0	0	0	0	0	0	0	0	7	40	0	0	0	0
8:15 AM	0	0	5	0	0	0	9	0	0	0	0	0	0	0	0	0	14		0	0	0	0
8:30 AM	0	0	4	0	0	0	6	0	0	0	0	0	0	0	0	0	10		0	0	0	0
8:45 AM	0	0	1	0	0	0	8	0	0	0	0	0	0	0	0	0	9		0	0	0	0
Count Total	0	0	28	0	0	0	56	0	0	1	0	0	0	0	0	0	85		0	0	0	0
Peak Hour	0	0	20	0	0	0	28	0	0	0	0	0	0	0	0	0	48		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 2 COLT CT & WALKER RD PM

Date: Tuesday, July 15, 2025


Peak Hour: 04:15 PM - 05:15 PM

Peak 15-Minutes: 04:45 PM - 05:00 PM


Peak Hour - Motorized Vehicles

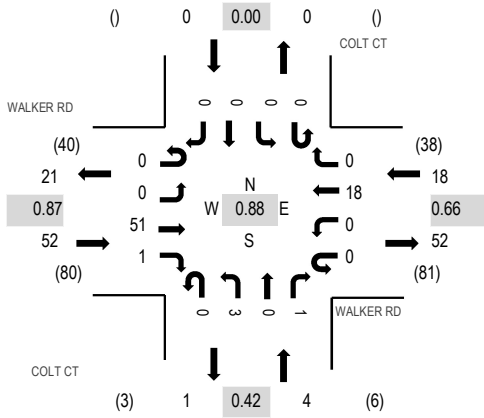

Peak Hour - Bicycles

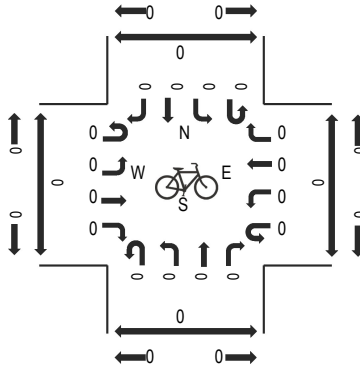

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	WALKER RD Eastbound				WALKER RD Westbound				COLT CT Northbound				COLT CT Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
4:00 PM	0	0	6	0	0	0	6	0	0	0	0	1	0	0	0	0	13	69	0	0	0	0
4:15 PM	0	0	12	0	0	0	3	0	0	3	0	0	0	0	0	0	18	74	0	0	0	0
4:30 PM	0	0	12	0	0	0	4	0	0	0	0	1	0	0	0	0	17	66	0	0	0	0
4:45 PM	0	0	12	1	0	0	8	0	0	0	0	0	0	0	0	0	21	63	0	0	0	0
5:00 PM	0	0	15	0	0	0	3	0	0	0	0	0	0	0	0	0	18	55	0	0	0	0
5:15 PM	0	0	6	0	0	1	3	0	0	0	0	0	0	0	0	0	10		0	0	0	0
5:30 PM	0	0	7	0	0	1	5	0	0	1	0	0	0	0	0	0	14		0	0	0	0
5:45 PM	0	0	9	0	0	0	4	0	0	0	0	0	0	0	0	0	13		0	0	0	0
Count Total	0	0	79	1	0	2	36	0	0	4	0	2	0	0	0	0	124		0	0	0	0
Peak Hour	0	0	51	1	0	0	18	0	0	3	0	1	0	0	0	0	74		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 3 THOMPSON RD & WALKER RD AM

Date: Tuesday, July 15, 2025


Peak Hour: 07:45 AM - 08:45 AM

Peak 15-Minutes: 07:45 AM - 08:00 AM


Peak Hour - Motorized Vehicles

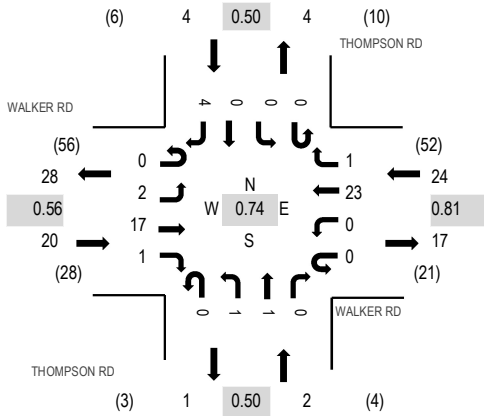

Peak Hour - Bicycles

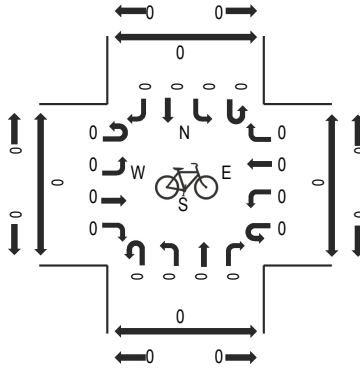

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	WALKER RD Eastbound				WALKER RD Westbound				THOMPSON RD Northbound				THOMPSON RD Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
7:00 AM	0	0	1	0	0	1	5	1	0	1	0	0	0	0	0	0	9	48	0	0	0	0
7:15 AM	0	1	2	0	0	0	8	0	0	1	0	0	0	0	1	0	13	47	0	0	0	0
7:30 AM	0	2	1	0	0	0	4	1	0	0	0	0	0	0	0	1	9	49	0	0	0	0
7:45 AM	0	1	8	0	0	0	6	0	0	0	0	0	0	0	0	2	17	50	0	0	0	0
8:00 AM	0	0	2	0	0	0	5	0	0	0	1	0	0	0	0	0	8	42	0	0	0	0
8:15 AM	0	0	5	0	0	0	7	1	0	1	0	0	0	0	0	1	15		0	0	0	0
8:30 AM	0	1	2	1	0	0	5	0	0	0	0	0	0	0	0	1	10		0	0	0	0
8:45 AM	0	1	0	0	0	0	8	0	0	0	0	0	0	0	0	0	9		0	0	0	0
Count Total	0	6	21	1	0	1	48	3	0	3	1	0	0	0	1	5	90		0	0	0	0
Peak Hour	0	2	17	1	0	0	23	1	0	1	1	0	0	0	0	4	50		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 3 THOMPSON RD & WALKER RD PM

Date: Tuesday, July 15, 2025


Peak Hour: 04:15 PM - 05:15 PM

Peak 15-Minutes: 04:45 PM - 05:00 PM


Peak Hour - Motorized Vehicles

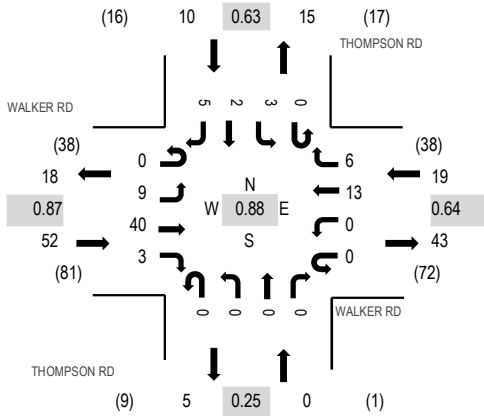

Peak Hour - Bicycles

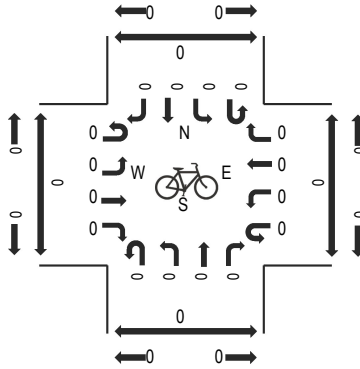

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	WALKER RD Eastbound				WALKER RD Westbound				THOMPSON RD Northbound				THOMPSON RD Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
4:00 PM	0	2	5	0	0	1	6	0	0	0	0	0	0	0	0	0	14	74	0	0	0	0
4:15 PM	0	4	8	0	0	0	3	2	0	0	0	0	0	1	0	0	18	81	0	0	0	0
4:30 PM	0	3	10	0	0	0	1	1	0	0	0	0	0	0	1	3	19	73	0	0	0	0
4:45 PM	0	1	9	2	0	0	7	2	0	0	0	0	0	0	1	1	23	69	0	0	0	0
5:00 PM	0	1	13	1	0	0	2	1	0	0	0	0	0	2	0	1	21	62	0	0	0	0
5:15 PM	0	0	4	2	0	0	4	0	0	0	0	0	0	0	0	0	10		0	0	0	0
5:30 PM	0	0	7	0	0	0	5	0	0	0	0	0	0	2	0	1	15		0	0	0	0
5:45 PM	0	0	9	0	0	0	3	0	0	0	0	1	0	1	1	1	16		0	0	0	0
Count Total	0	11	65	5	0	1	31	6	0	0	0	1	0	6	3	7	136		0	0	0	0
Peak Hour	0	9	40	3	0	0	13	6	0	0	0	0	0	3	2	5	81		0	0	0	0



All Traffic Data Services

4 - WALKER RD WEST OF BROWN RD

Time	EB	WB	Total
7/15/2025	1	1	2
7/15/2025 12:15:00 AM	0	0	0
7/15/2025 12:30:00 AM	0	0	0
7/15/2025 12:45:00 AM	0	0	0
7/15/2025 1:00:00 AM	1	0	1
7/15/2025 1:15:00 AM	0	0	0
7/15/2025 1:30:00 AM	0	0	0
7/15/2025 1:45:00 AM	0	0	0
7/15/2025 2:00:00 AM	0	0	0
7/15/2025 2:15:00 AM	1	0	1
7/15/2025 2:30:00 AM	0	0	0
7/15/2025 2:45:00 AM	0	0	0
7/15/2025 3:00:00 AM	0	0	0
7/15/2025 3:15:00 AM	0	0	0
7/15/2025 3:30:00 AM	0	0	0
7/15/2025 3:45:00 AM	0	0	0
7/15/2025 4:00:00 AM	0	2	2
7/15/2025 4:15:00 AM	0	0	0
7/15/2025 4:30:00 AM	0	1	1
7/15/2025 4:45:00 AM	1	0	1
7/15/2025 5:00:00 AM	0	6	6
7/15/2025 5:15:00 AM	3	1	4
7/15/2025 5:30:00 AM	0	1	1
7/15/2025 5:45:00 AM	2	3	5
7/15/2025 6:00:00 AM	3	6	9
7/15/2025 6:15:00 AM	1	3	4
7/15/2025 6:30:00 AM	0	6	6
7/15/2025 6:45:00 AM	0	5	5
7/15/2025 7:00:00 AM	1	8	9
7/15/2025 7:15:00 AM	3	9	12
7/15/2025 7:30:00 AM	3	5	8
7/15/2025 7:45:00 AM	9	9	18
7/15/2025 8:00:00 AM	2	5	7
7/15/2025 8:15:00 AM	5	10	15
7/15/2025 8:30:00 AM	5	6	11
7/15/2025 8:45:00 AM	3	8	11
7/15/2025 9:00:00 AM	2	10	12
7/15/2025 9:15:00 AM	2	8	10
7/15/2025 9:30:00 AM	2	2	4
7/15/2025 9:45:00 AM	7	3	10
7/15/2025 10:00:00 AM	5	7	12
7/15/2025 10:15:00 AM	2	6	8
7/15/2025 10:30:00 AM	5	4	9
7/15/2025 10:45:00 AM	4	3	7
7/15/2025 11:00:00 AM	3	6	9
7/15/2025 11:15:00 AM	3	5	8
7/15/2025 11:30:00 AM	8	4	12
7/15/2025 11:45:00 AM	4	9	13
Total	91	162	253
Percentage	36.0%	64.0%	
Peak Hour	7:45 AM	8:15 AM	7:45 AM
Volume	21	34	51
PHF	0.583	0.850	0.708



All Traffic Data Services

4 - WALKER RD WEST OF BROWN RD

Time	EB	WB	Total
7/15/2025 12:00:00 PM	5	4	9
7/15/2025 12:15:00 PM	5	7	12
7/15/2025 12:30:00 PM	5	2	7
7/15/2025 12:45:00 PM	3	4	7
7/15/2025 1:00:00 PM	8	4	12
7/15/2025 1:15:00 PM	2	5	7
7/15/2025 1:30:00 PM	4	4	8
7/15/2025 1:45:00 PM	10	3	13
7/15/2025 2:00:00 PM	8	5	13
7/15/2025 2:15:00 PM	10	5	15
7/15/2025 2:30:00 PM	8	8	16
7/15/2025 2:45:00 PM	4	3	7
7/15/2025 3:00:00 PM	9	4	13
7/15/2025 3:15:00 PM	8	1	9
7/15/2025 3:30:00 PM	6	7	13
7/15/2025 3:45:00 PM	10	7	17
7/15/2025 4:00:00 PM	6	7	13
7/15/2025 4:15:00 PM	13	6	19
7/15/2025 4:30:00 PM	10	3	13
7/15/2025 4:45:00 PM	15	8	23
7/15/2025 5:00:00 PM	15	5	20
7/15/2025 5:15:00 PM	5	3	8
7/15/2025 5:30:00 PM	7	6	13
7/15/2025 5:45:00 PM	10	4	14
7/15/2025 6:00:00 PM	11	3	14
7/15/2025 6:15:00 PM	4	5	9
7/15/2025 6:30:00 PM	1	2	3
7/15/2025 6:45:00 PM	6	1	7
7/15/2025 7:00:00 PM	3	5	8
7/15/2025 7:15:00 PM	10	4	14
7/15/2025 7:30:00 PM	5	2	7
7/15/2025 7:45:00 PM	8	1	9
7/15/2025 8:00:00 PM	4	2	6
7/15/2025 8:15:00 PM	4	1	5
7/15/2025 8:30:00 PM	0	3	3
7/15/2025 8:45:00 PM	2	2	4
7/15/2025 9:00:00 PM	1	1	2
7/15/2025 9:15:00 PM	2	3	5
7/15/2025 9:30:00 PM	2	0	2
7/15/2025 9:45:00 PM	1	1	2
7/15/2025 10:00:00 PM	0	1	1
7/15/2025 10:15:00 PM	2	0	2
7/15/2025 10:30:00 PM	1	0	1
7/15/2025 10:45:00 PM	1	0	1
7/15/2025 11:00:00 PM	1	1	2
7/15/2025 11:15:00 PM	0	0	0
7/15/2025 11:30:00 PM	0	0	0
7/15/2025 11:45:00 PM	1	0	1
Total	256	153	409
Percentage	62.6%	37.4%	
Peak Hour	4:15 PM	3:30 PM	4:15 PM
Volume	53	27	75
PHF	0.883	0.964	0.815
Grand Total	347	315	662
Percentage	52.4%	47.6%	

APPENDIX B

Level of Service Definitions

The following information is referenced from the Highway Capacity Manual: A Guide for Multimodal Mobility Analysis, 7th Edition, Transportation Research Board, 2022: Chapter 19 – Signalized Intersections.

Motorized Vehicle Level of Service (LOS) for Signalized Intersections

Levels of service are defined to represent reasonable ranges in control delay.

LOS A Describes operations with a control delay of 10 s/veh or less and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is low and either progression is exceptionally favorable or the cycle length is very short. If it is due to favorable progression, most vehicles arrive during the green indication and travel through the intersection without stopping.

LOS B Describes operations with control delay between 10 and 20 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is low and either progression is highly favorable or the cycle length is short. More vehicles stop than with LOS A.

LOS C Describes operations with control delay between 20 and 35 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when progression is favorable or the cycle length is moderate. Individual *cycle failures* (i.e., one or more queued vehicles are not able to depart as a result of insufficient capacity during the cycle) may begin to appear at this level. The number of vehicles stopping is significant, although many vehicles still pass through the intersection without stopping.

LOS D Describes operations with control delay between 35 and 55 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is high and either progression is ineffective or the cycle length is long. Many vehicles stop and individual cycle failures are noticeable.

LOS E Describes operations with control delay between 55 and 80 s/veh and a volume-to-capacity ratio no greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is high, progression is unfavorable, and the cycle length is long. Individual cycle failures are frequent.

LOS F Describes operations with control delay exceeding 80 s/veh or a volume-to-capacity ratio greater than 1.0. This level is typically assigned when the volume-to-capacity ratio is very high, progression is very poor, and the cycle length is long. Most cycles fail to clear the queue.

Control Delay (s/veh)	LOS by Volume-to-Capacity Ratio ^a	
	$v/c \leq 1.0$	$v/c > 1.0$
≤ 10	A	F
$> 10 - 20$	B	F
$> 20 - 35$	C	F
$> 35 - 55$	D	F
$> 55 - 80$	E	F
> 80	F	F

Note: ^a For approach-based and intersectionwide assessments, LOS is defined solely by control delay.

The following information is referenced from the Highway Capacity Manual: A Guide for Multimodal Mobility Analysis, 7th Edition, Transportation Research Board, 2022: Chapter 20 – Two-Way Stop-Controlled Intersections, Chapter 21 – All-Way Stop-Controlled Intersections, and Chapter 22 - Roundabouts.

Motorized Vehicle Level of Service (LOS) for Unsignalized & Roundabout Intersections

LOS is a quantitative stratification of performance measure(s) representing quality of service. Quality of service describes how well a transportation facility or service operates from a traveler's perspective. LOS is measured on an A – F scale, with LOS A representing the best operating conditions from a traveler's perspective.

Control Delay (s/veh)	<u>LOS by Volume-to-Capacity Ratio^a</u>	
	$v/c \leq 1.0$	$v/c > 1.0$
0 – 10	A	F
> 10 – 15	B	F
> 15 – 25	C	F
> 25 – 35	D	F
> 35 – 50	E	F
> 50	F	F

Note: The LOS criteria apply to each lane on a given approach and to each approach on the minor street. LOS is not calculated for major-street approaches or for the intersection as a whole.

^a For approaches and intersectionwide assessment, LOS is defined solely by control delay.

APPENDIX C

Capacity Worksheets

Intersection

Int Delay, s/veh 1.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	2	17	1	0	23	1	1	1	0	0	0	4
Future Vol, veh/h	2	17	1	0	23	1	1	1	0	0	0	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	18	1	0	25	1	1	1	0	0	0	4

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	26	0	0	20	0	0	48	49	19	49	49	26
Stage 1	-	-	-	-	-	-	23	23	-	26	26	-
Stage 2	-	-	-	-	-	-	25	26	-	23	24	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1588	-	-	1597	-	-	952	842	1059	951	842	1050
Stage 1	-	-	-	-	-	-	995	876	-	992	874	-
Stage 2	-	-	-	-	-	-	993	873	-	995	875	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1588	-	-	1597	-	-	947	841	1059	949	841	1050
Mov Cap-2 Maneuver	-	-	-	-	-	-	947	841	-	949	841	-
Stage 1	-	-	-	-	-	-	993	875	-	992	874	-
Stage 2	-	-	-	-	-	-	989	873	-	992	874	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	0.73	0	9.05	8.44
HCM LOS			A	A

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	891	178	-	-	1597	-	-	1050
HCM Lane V/C Ratio	0.002	0.001	-	-	-	-	-	0.004
HCM Ctrl Dly (s/v)	9.1	7.3	0	-	0	-	-	8.4
HCM Lane LOS	A	A	A	-	A	-	-	A
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	0

Intersection

Int Delay, s/veh 0

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	20	0	0	28	0	0
Future Vol, veh/h	20	0	0	28	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	22	0	0	30	0	0

Major/Minor	Major1	Major2	Minor1
Conflicting Flow All	0	0	22
Stage 1	-	-	-
Stage 2	-	-	-
Critical Hdwy	-	-	4.12
Critical Hdwy Stg 1	-	-	-
Critical Hdwy Stg 2	-	-	-
Follow-up Hdwy	-	-	2.218
Pot Cap-1 Maneuver	-	-	1594
Stage 1	-	-	-
Stage 2	-	-	-
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	-	-	1594
Mov Cap-2 Maneuver	-	-	-
Stage 1	-	-	-
Stage 2	-	-	-

Approach	EB	WB	NB
HCM Ctrl Dly, s/v	0	0	0
HCM LOS			A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)	-	-	-	1594	-
HCM Lane V/C Ratio	-	-	-	-	-
HCM Ctrl Dly (s/v)	0	-	-	0	-
HCM Lane LOS	A	-	-	A	-
HCM 95th %tile Q(veh)	-	-	-	0	-

Intersection						
Int Delay, s/veh	0.9					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	2	19	27	1	1	3
Future Vol, veh/h	2	19	27	1	1	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	21	29	1	1	3
Major/Minor	Major1	Major2		Minor2		
Conflicting Flow All	30	0	-	0	55	30
Stage 1	-	-	-	-	30	-
Stage 2	-	-	-	-	25	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1582	-	-	-	953	1045
Stage 1	-	-	-	-	993	-
Stage 2	-	-	-	-	998	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneuver	1582	-	-	-	952	1045
Mov Cap-2 Maneuver	-	-	-	-	952	-
Stage 1	-	-	-	-	991	-
Stage 2	-	-	-	-	998	-
Approach	EB	WB		SB		
HCM Ctrl Dly, s/v	0.69	0		8.55		
HCM LOS	A					
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	171	-	-	-	-	1020
HCM Lane V/C Ratio	0.001	-	-	-	-	0.004
HCM Ctrl Dly (s/v)	7.3	0	-	-	-	8.5
HCM Lane LOS	A	A	-	-	-	A
HCM 95th %tile Q(veh)	0	-	-	-	-	0

Intersection

Int Delay, s/veh 1.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	9	40	3	0	13	6	0	0	0	3	2	5
Future Vol, veh/h	9	40	3	0	13	6	0	0	0	3	2	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	10	43	3	0	14	7	0	0	0	3	2	5

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	21	0	0	47	0	0	80	85	45	80	84	17
Stage 1	-	-	-	-	-	-	65	65	-	17	17	-
Stage 2	-	-	-	-	-	-	15	21	-	63	66	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1595	-	-	1561	-	-	908	805	1025	908	806	1061
Stage 1	-	-	-	-	-	-	946	841	-	1002	881	-
Stage 2	-	-	-	-	-	-	1005	878	-	948	840	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1595	-	-	1561	-	-	896	800	1025	902	801	1061
Mov Cap-2 Maneuver	-	-	-	-	-	-	896	800	-	902	801	-
Stage 1	-	-	-	-	-	-	940	836	-	1002	881	-
Stage 2	-	-	-	-	-	-	997	878	-	942	834	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	1.26	0	0	8.84
HCM LOS			A	A

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	-	307	-	-	1561	-	-	949
HCM Lane V/C Ratio	-	0.006	-	-	-	-	-	0.011
HCM Ctrl Dly (s/v)	0	7.3	0	-	0	-	-	8.8
HCM Lane LOS	A	A	A	-	A	-	-	A
HCM 95th %tile Q(veh)	-	0	-	-	0	-	-	0

Intersection

Int Delay, s/veh 0.5

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	51	1	0	18	3	1
Future Vol, veh/h	51	1	0	18	3	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	55	1	0	20	3	1

Major/Minor	Major1	Major2	Minor1
Conflicting Flow All	0	0	57
Stage 1	-	-	-
Stage 2	-	-	-
Critical Hdwy	-	-	4.12
Critical Hdwy Stg 1	-	-	-
Critical Hdwy Stg 2	-	-	-
Follow-up Hdwy	-	-	2.218
Pot Cap-1 Maneuver	-	-	1548
Stage 1	-	-	-
Stage 2	-	-	-
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	-	-	1548
Mov Cap-2 Maneuver	-	-	-
Stage 1	-	-	-
Stage 2	-	-	-

Approach	EB	WB	NB
HCM Ctrl Dly, s/v	0	0	8.82
HCM LOS			A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)	947	-	-	1548	-
HCM Lane V/C Ratio	0.005	-	-	-	-
HCM Ctrl Dly (s/v)	8.8	-	-	0	-
HCM Lane LOS	A	-	-	A	-
HCM 95th %tile Q(veh)	0	-	-	0	-

Intersection						
Int Delay, s/veh	0.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	2	51	21	0	2	1
Future Vol, veh/h	2	51	21	0	2	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	55	23	0	2	1
Major/Minor	Major1	Major2		Minor2		
Conflicting Flow All	23	0	-	0	83	23
Stage 1	-	-	-	-	23	-
Stage 2	-	-	-	-	60	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1592	-	-	-	919	1054
Stage 1	-	-	-	-	1000	-
Stage 2	-	-	-	-	963	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneuver	1592	-	-	-	918	1054
Mov Cap-2 Maneuver	-	-	-	-	918	-
Stage 1	-	-	-	-	998	-
Stage 2	-	-	-	-	963	-
Approach	EB	WB		SB		
HCM Ctrl Dly, s/v	0.27	0		8.77		
HCM LOS	A					
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	68	-	-	-	959	
HCM Lane V/C Ratio	0.001	-	-	-	0.003	
HCM Ctrl Dly (s/v)	7.3	0	-	-	8.8	
HCM Lane LOS	A	A	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Intersection

Int Delay, s/veh 1.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	2	18	1	0	24	1	1	1	0	0	0	4
Future Vol, veh/h	2	18	1	0	24	1	1	1	0	0	0	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	20	1	0	26	1	1	1	0	0	0	4

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	27	0	0	21	0	0	51	52	20	51	52	27
Stage 1	-	-	-	-	-	-	24	24	-	27	27	-
Stage 2	-	-	-	-	-	-	26	27	-	24	25	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1587	-	-	1595	-	-	949	840	1058	948	840	1049
Stage 1	-	-	-	-	-	-	993	875	-	991	873	-
Stage 2	-	-	-	-	-	-	991	873	-	993	874	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1587	-	-	1595	-	-	944	839	1058	946	839	1049
Mov Cap-2 Maneuver	-	-	-	-	-	-	944	839	-	946	839	-
Stage 1	-	-	-	-	-	-	992	874	-	991	873	-
Stage 2	-	-	-	-	-	-	987	873	-	991	873	-

Approach	EB			WB			NB			SB		
HCM Ctrl Dly, s/v	0.69			0			9.06			8.45		
HCM LOS							A			A		

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	888	170	-	-	1595	-	-	1049
HCM Lane V/C Ratio	0.002	0.001	-	-	-	-	-	0.004
HCM Ctrl Dly (s/v)	9.1	7.3	0	-	0	-	-	8.4
HCM Lane LOS	A	A	A	-	A	-	-	A
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	0

Intersection						
Int Delay, s/veh	0					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	21	0	0	29	0	0
Future Vol, veh/h	21	0	0	29	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	23	0	0	32	0	0
Major/Minor	Major1	Major2		Minor1		
Conflicting Flow All	0	0	23	0	54	23
Stage 1	-	-	-	-	23	-
Stage 2	-	-	-	-	32	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1592	-	954	1054
Stage 1	-	-	-	-	1000	-
Stage 2	-	-	-	-	991	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1592	-	954	1054
Mov Cap-2 Maneuver	-	-	-	-	954	-
Stage 1	-	-	-	-	1000	-
Stage 2	-	-	-	-	991	-
Approach	EB	WB		NB		
HCM Ctrl Dly, s/v	0	0		0		
HCM LOS	A					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	-	-	-	1592	-	
HCM Lane V/C Ratio	-	-	-	-	-	
HCM Ctrl Dly (s/v)	0	-	-	0	-	
HCM Lane LOS	A	-	-	A	-	
HCM 95th %tile Q(veh)	-	-	-	0	-	

Intersection						
Int Delay, s/veh	0.9					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	2	20	28	1	1	3
Future Vol, veh/h	2	20	28	1	1	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	22	30	1	1	3
Major/Minor	Major1	Major2		Minor2		
Conflicting Flow All	32	0	-	0	57	31
Stage 1	-	-	-	-	31	-
Stage 2	-	-	-	-	26	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1581	-	-	-	950	1043
Stage 1	-	-	-	-	992	-
Stage 2	-	-	-	-	996	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneuver	1581	-	-	-	949	1043
Mov Cap-2 Maneuver	-	-	-	-	949	-
Stage 1	-	-	-	-	990	-
Stage 2	-	-	-	-	996	-
Approach	EB	WB		SB		
HCM Ctrl Dly, s/v	0.66	0		8.55		
HCM LOS	A					
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	164	-	-	-	1018	
HCM Lane V/C Ratio	0.001	-	-	-	0.004	
HCM Ctrl Dly (s/v)	7.3	0	-	-	8.6	
HCM Lane LOS	A	A	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Intersection												
Int Delay, s/veh	1.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	9	42	3	0	14	6	0	0	0	3	2	5
Future Vol, veh/h	9	42	3	0	14	6	0	0	0	3	2	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	10	46	3	0	15	7	0	0	0	3	2	5
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	22	0	0	49	0	0	83	89	47	84	87	18
Stage 1	-	-	-	-	-	-	67	67	-	18	18	-
Stage 2	-	-	-	-	-	-	16	22	-	65	68	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1594	-	-	1558	-	-	904	802	1022	903	803	1060
Stage 1	-	-	-	-	-	-	944	839	-	1001	880	-
Stage 2	-	-	-	-	-	-	1003	877	-	945	838	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1594	-	-	1558	-	-	891	796	1022	897	798	1060
Mov Cap-2 Maneuver	-	-	-	-	-	-	891	796	-	897	798	-
Stage 1	-	-	-	-	-	-	938	834	-	1001	880	-
Stage 2	-	-	-	-	-	-	996	877	-	939	833	-
Approach	EB			WB			NB			SB		
HCM Ctrl Dly, s/v	1.21			0			0			8.85		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1				
Capacity (veh/h)	-	296	-	-	1558	-	-	946				
HCM Lane V/C Ratio	-	0.006	-	-	-	-	-	0.011				
HCM Ctrl Dly (s/v)	0	7.3	0	-	0	-	-	8.8				
HCM Lane LOS	A	A	A	-	A	-	-	A				
HCM 95th %tile Q(veh)	-	0	-	-	0	-	-	0				

Intersection						
Int Delay, s/veh	0.5					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	53	1	0	19	3	1
Future Vol, veh/h	53	1	0	19	3	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	58	1	0	21	3	1
Major/Minor	Major1	Major2		Minor1		
Conflicting Flow All	0	0	59	0	79	58
Stage 1	-	-	-	-	58	-
Stage 2	-	-	-	-	21	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1545	-	924	1008
Stage 1	-	-	-	-	964	-
Stage 2	-	-	-	-	1002	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1545	-	924	1008
Mov Cap-2 Maneuver	-	-	-	-	924	-
Stage 1	-	-	-	-	964	-
Stage 2	-	-	-	-	1002	-
Approach	EB	WB		NB		
HCM Ctrl Dly, s/v	0	0		8.83		
HCM LOS	A					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	943	-	-	1545	-	
HCM Lane V/C Ratio	0.005	-	-	-	-	
HCM Ctrl Dly (s/v)	8.8	-	-	0	-	
HCM Lane LOS	A	-	-	A	-	
HCM 95th %tile Q(veh)	0	-	-	0	-	

Intersection						
Int Delay, s/veh	0.5					
Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	2	53	22	0	2	1
Future Vol, veh/h	2	53	22	0	2	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	2	58	24	0	2	1
Major/Minor	Major1	Major2		Minor2		
Conflicting Flow All	24	0	-	0	86	24
Stage 1	-	-	-	-	24	-
Stage 2	-	-	-	-	62	-
Critical Hdwy	4.12	-	-	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	2.218	-	-	-	3.518	3.318
Pot Cap-1 Maneuver	1591	-	-	-	915	1053
Stage 1	-	-	-	-	999	-
Stage 2	-	-	-	-	961	-
Platoon blocked, %		-	-	-		
Mov Cap-1 Maneuver	1591	-	-	-	914	1053
Mov Cap-2 Maneuver	-	-	-	-	914	-
Stage 1	-	-	-	-	997	-
Stage 2	-	-	-	-	961	-
Approach	EB	WB		SB		
HCM Ctrl Dly, s/v	0.26	0		8.78		
HCM LOS	A					
Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1	
Capacity (veh/h)	65	-	-	-	956	
HCM Lane V/C Ratio	0.001	-	-	-	0.003	
HCM Ctrl Dly (s/v)	7.3	0	-	-	8.8	
HCM Lane LOS	A	A	-	-	A	
HCM 95th %tile Q(veh)	0	-	-	-	0	

Intersection

Int Delay, s/veh 1.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	2	20	1	0	25	1	1	1	0	0	0	4
Future Vol, veh/h	2	20	1	0	25	1	1	1	0	0	0	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	22	1	0	27	1	1	1	0	0	0	4

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	28	0	0	23	0	0	54	55	22	54	55	28
Stage 1	-	-	-	-	-	-	27	27	-	28	28	-
Stage 2	-	-	-	-	-	-	27	28	-	27	27	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1585	-	-	1592	-	-	944	836	1055	944	836	1048
Stage 1	-	-	-	-	-	-	991	873	-	989	872	-
Stage 2	-	-	-	-	-	-	990	872	-	991	873	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1585	-	-	1592	-	-	939	835	1055	941	835	1048
Mov Cap-2 Maneuver	-	-	-	-	-	-	939	835	-	941	835	-
Stage 1	-	-	-	-	-	-	989	872	-	989	872	-
Stage 2	-	-	-	-	-	-	986	872	-	988	871	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	0.63	0	9.08	8.45
HCM LOS			A	A

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	884	155	-	-	1592	-	-	1048
HCM Lane V/C Ratio	0.002	0.001	-	-	-	-	-	0.004
HCM Ctrl Dly (s/v)	9.1	7.3	0	-	0	-	-	8.5
HCM Lane LOS	A	A	A	-	A	-	-	A
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	0

Intersection						
Int Delay, s/veh	1.1					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	22	2	0	30	7	1
Future Vol, veh/h	22	2	0	30	7	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	24	2	0	33	8	1
Major/Minor	Major1	Major2		Minor1		
Conflicting Flow All	0	0	26	0	58	25
Stage 1	-	-	-	-	25	-
Stage 2	-	-	-	-	33	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1588	-	950	1051
Stage 1	-	-	-	-	998	-
Stage 2	-	-	-	-	990	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1588	-	950	1051
Mov Cap-2 Maneuver	-	-	-	-	950	-
Stage 1	-	-	-	-	998	-
Stage 2	-	-	-	-	990	-
Approach	EB	WB		NB		
HCM Ctrl Dly, s/v	0	0		8.78		
HCM LOS	A					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	961	-	-	1588	-	
HCM Lane V/C Ratio	0.009	-	-	-	-	
HCM Ctrl Dly (s/v)	8.8	-	-	0	-	
HCM Lane LOS	A	-	-	A	-	
HCM 95th %tile Q(veh)	0	-	-	0	-	

Intersection												
Int Delay, s/veh	1.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	2	22	2	1	35	1	7	0	1	1	0	3
Future Vol, veh/h	2	22	2	1	35	1	7	0	1	1	0	3
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	24	2	1	38	1	8	0	1	1	0	3

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	39	0	0	26	0	0	70	71	25	69	71	39
Stage 1	-	-	-	-	-	-	29	29	-	41	41	-
Stage 2	-	-	-	-	-	-	40	41	-	28	30	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1571	-	-	1588	-	-	922	820	1051	923	819	1033
Stage 1	-	-	-	-	-	-	988	871	-	974	861	-
Stage 2	-	-	-	-	-	-	975	861	-	989	870	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1571	-	-	1588	-	-	918	818	1051	920	818	1033
Mov Cap-2 Maneuver	-	-	-	-	-	-	918	818	-	920	818	-
Stage 1	-	-	-	-	-	-	986	869	-	973	860	-
Stage 2	-	-	-	-	-	-	971	860	-	986	869	-

Approach	EB			WB			NB			SB		
HCM Ctrl Dly, s/v	0.56			0.2			8.9			8.61		
HCM LOS							A			A		

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	932	136	-	-	48	-	-	1002
HCM Lane V/C Ratio	0.009	0.001	-	-	0.001	-	-	0.004
HCM Ctrl Dly (s/v)	8.9	7.3	0	-	7.3	0	-	8.6
HCM Lane LOS	A	A	A	-	A	A	-	A
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	0

Intersection												
Int Delay, s/veh	1.8											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	9	44	3	0	16	6	0	0	0	3	2	5
Future Vol, veh/h	9	44	3	0	16	6	0	0	0	3	2	5
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	10	48	3	0	17	7	0	0	0	3	2	5
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	24	0	0	51	0	0	88	93	49	88	91	21
Stage 1	-	-	-	-	-	-	69	69	-	21	21	-
Stage 2	-	-	-	-	-	-	18	24	-	67	71	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1591	-	-	1555	-	-	898	797	1019	897	799	1057
Stage 1	-	-	-	-	-	-	941	837	-	998	878	-
Stage 2	-	-	-	-	-	-	1001	875	-	943	836	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	1591	-	-	1555	-	-	885	792	1019	892	794	1057
Mov Cap-2 Maneuver	-	-	-	-	-	-	885	792	-	892	794	-
Stage 1	-	-	-	-	-	-	935	832	-	998	878	-
Stage 2	-	-	-	-	-	-	993	875	-	937	831	-
Approach	EB			WB			NB			SB		
HCM Ctrl Dly, s/v	1.17			0			0			8.87		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1				
Capacity (veh/h)	-	286	-	-	1555	-	-	942				
HCM Lane V/C Ratio	-	0.006	-	-	-	-	-	0.012				
HCM Ctrl Dly (s/v)	0	7.3	0	-	0	-	-	8.9				
HCM Lane LOS	A	A	A	-	A	-	-	A				
HCM 95th %tile Q(veh)	-	0	-	-	0	-	-	0				

Intersection						
Int Delay, s/veh	0.9					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	54	9	1	20	7	2
Future Vol, veh/h	54	9	1	20	7	2
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	59	10	1	22	8	2
Major/Minor	Major1	Major2		Minor1		
Conflicting Flow All	0	0	68	0	88	64
Stage 1	-	-	-	-	64	-
Stage 2	-	-	-	-	24	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1533	-	913	1001
Stage 1	-	-	-	-	959	-
Stage 2	-	-	-	-	999	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1533	-	913	1001
Mov Cap-2 Maneuver	-	-	-	-	913	-
Stage 1	-	-	-	-	959	-
Stage 2	-	-	-	-	998	-
Approach	EB	WB		NB		
HCM Ctrl Dly, s/v	0	0.35		8.91		
HCM LOS	A					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	931	-	-	86	-	
HCM Lane V/C Ratio	0.011	-	-	0.001	-	
HCM Ctrl Dly (s/v)	8.9	-	-	7.4	0	
HCM Lane LOS	A	-	-	A	A	
HCM 95th %tile Q(veh)	0	-	-	0	-	



Intersection												
Int Delay, s/veh	0.9											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	2	61	8	1	26	0	4	0	1	2	0	1
Future Vol, veh/h	2	61	8	1	26	0	4	0	1	2	0	1
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	66	9	1	28	0	4	0	1	2	0	1
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	28	0	0	75	0	0	105	105	71	101	110	28
Stage 1	-	-	-	-	-	-	75	75	-	30	30	-
Stage 2	-	-	-	-	-	-	30	30	-	71	79	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1585	-	-	1524	-	-	874	785	992	880	780	1047
Stage 1	-	-	-	-	-	-	934	833	-	986	870	-
Stage 2	-	-	-	-	-	-	986	870	-	939	829	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1585	-	-	1524	-	-	871	783	992	877	779	1047
Mov Cap-2 Maneuver	-	-	-	-	-	-	871	783	-	877	779	-
Stage 1	-	-	-	-	-	-	933	831	-	986	869	-
Stage 2	-	-	-	-	-	-	984	869	-	937	828	-
Approach	EB			WB			NB			SB		
HCM Ctrl Dly, s/v	0.2			0.27			9.06			8.9		
HCM LOS							A			A		
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1				
Capacity (veh/h)	893	50	-	-	67	-	-	927				
HCM Lane V/C Ratio	0.006	0.001	-	-	0.001	-	-	0.004				
HCM Ctrl Dly (s/v)	9.1	7.3	0	-	7.4	0	-	8.9				
HCM Lane LOS	A	A	A	-	A	A	-	A				
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	0				

APPENDIX D

Sight Distance Exhibit

IRON RIDGE SUBDIVISION

SITE DISTANCE

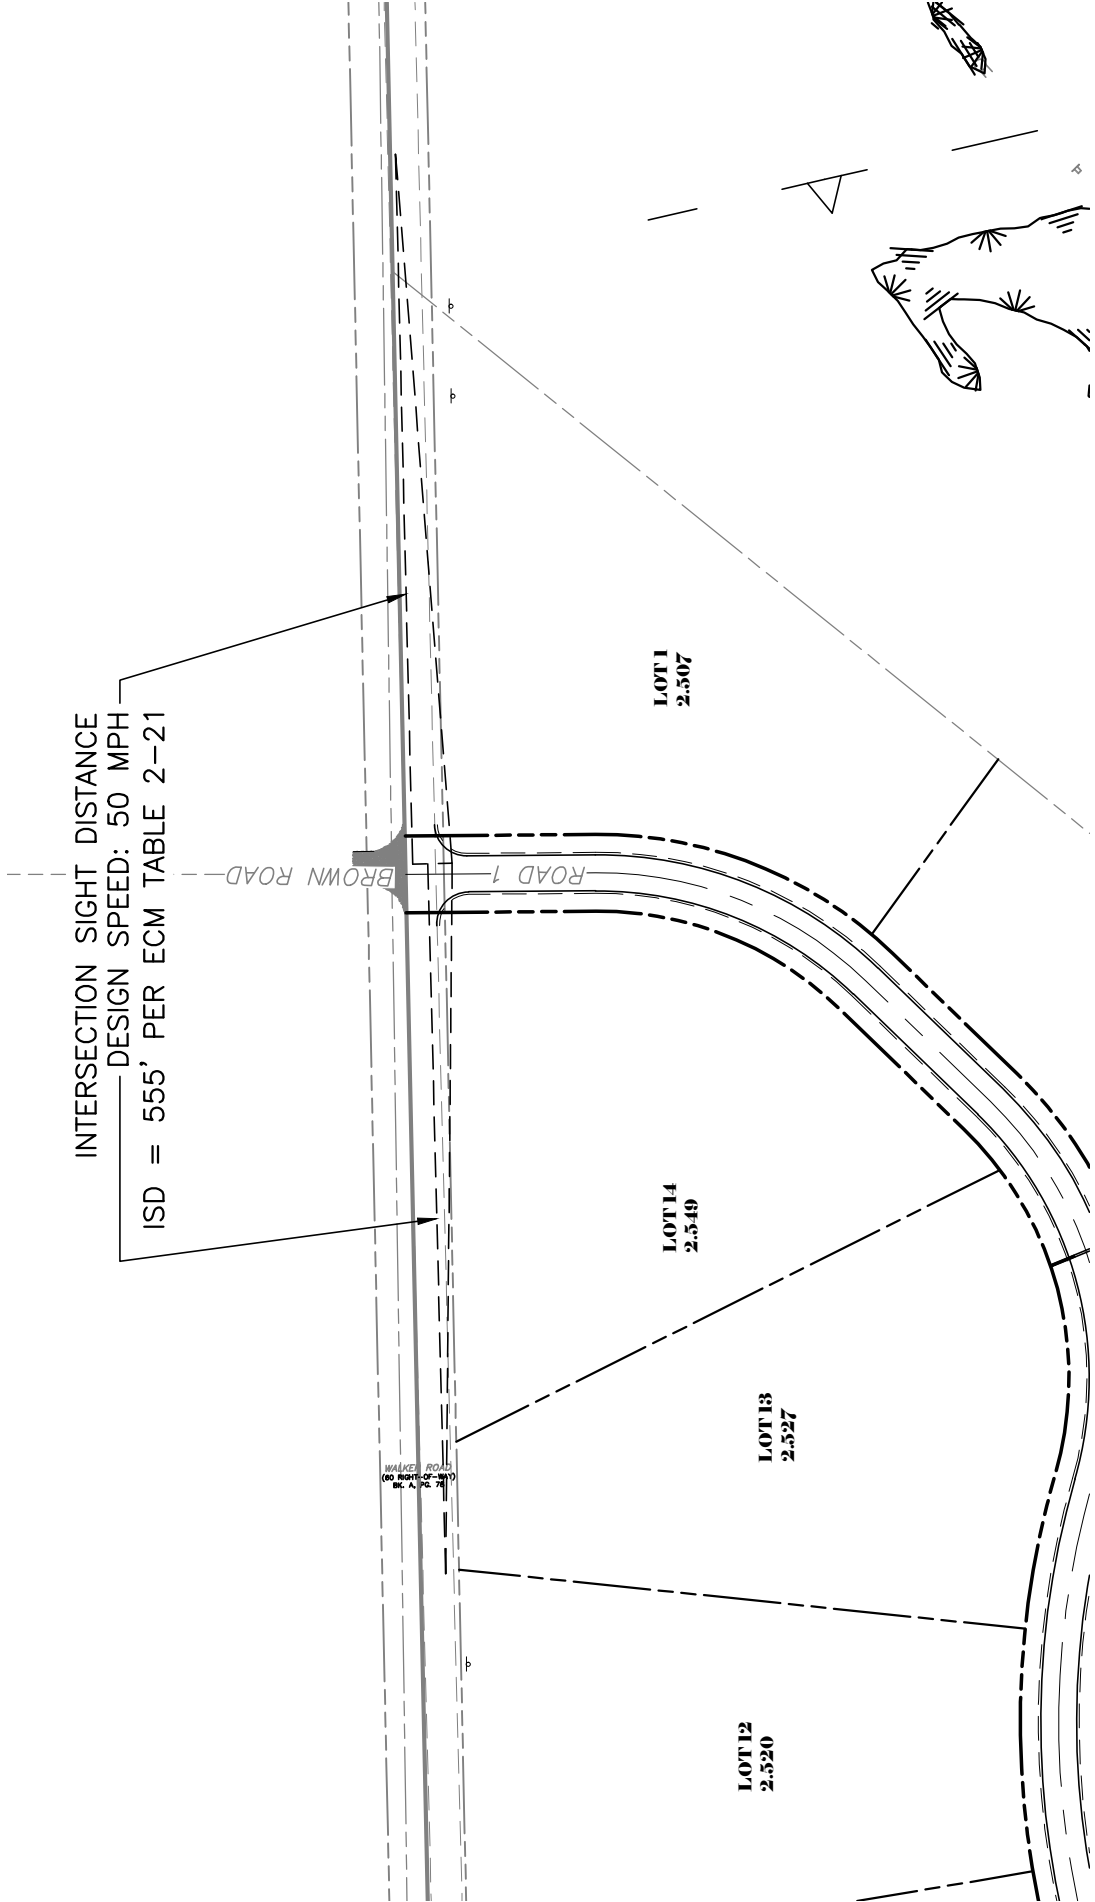

SITE DISTANCE	
IRON RIDGE SUB.	
JOB NO. 25009	
LOCATION: EPC	SHEET
11/04/2025	

