

EPC STORMWATER REVIEW COMMENTS IN ORANGE BOXES WITH BLACK TEXT

Flying Horse North Filing No. 3 Final Drainage Report

March 2024

Prepared For:

Mr. Drew Balsick

Vice President / Project Manager Flying Horse Development, LLC

2138 Flying Horse Club Drive

Colorado Springs, CO 80921

(719) 785-3237

Prepared By:

HR Green Development, LLC Contact: Richie Lyon, PE Richie.Lyon@hrgreen.com 719-318-0871

PCD File No. SF2326



Table of Contents

Engine	eer's Statement	1
Develo	oper's Statement	1
El Pas	o County:	1
Final D	Drainage Report – Flying Horse North	2
I. G	eneral Purpose, Location and Description	2
a.	Purpose and Scope	2
b.	DBPS Investigations	2
C.	Stakeholder Process	3
d.	Agency Jurisdictions	3
e.	General Project Description	3
f.	Data Sources	4
g.	Applicable Criteria and Standards	5
II. P	roject Characteristics	6
a.	Location in Drainage Basin, Offsite Flows, Size	6
b.	Compliance with DBPS	8
C.	Site Characteristics	9
d.	Major Drainage Ways and Structures	9
e.	Existing and proposed land uses	10
III.	Hydrologic Analysis	10
a.	Major Basins and Sub-basins	10
Maj	or Basin Description	10
Exis	sting Subbasin Description	11
Pro	posed Subbasin Description	11
b.	Water Quality and Detention Facilities	16
C.	Methodology	19
IV.	Hydraulic Analysis	20
a.	Major Drainageways	20
b.	Storm Sewer Infrastructure and Culvert Pipes	20
V. E	nvironmental Evaluations	21
a.	Significant Existing or Potential Wetland and Riparian Areas Impacts	21
C.	Stormwater Quality Considerations and Proposed Practices	21



d.	Permitting Requirements	. 21
e.	4-Step Process	. 22
VI.	Drawings	.23
VII.	Drainage and Bridge Fees	.23
VIII.	Summary	.24
IX.	References	.25

Appendices

- A. Maps & Exhibits
- B. Hydrology Calculations
- C. Hydraulic Calculations
- D. Pond Calculations
- E. Proposed Culvert Calculations
- F. Referenced Report Excerpts
- G. Site Drainage Maps



Engineer's Statement

This report and plan for the drainage design of the development, Flying Horse North, was prepared by me (or under my direct supervision) and is correct to the best of my knowledge and belief. Said report and plan has been prepared in accordance with the *El Paso County Drainage Criteria* Manual and is in conformity with the master plan of the drainage basin. I understand that El Paso County does not and will not assume liability for drainage facilities designed by others. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.

Richie Lyon, PE Date State of Colorado No. 53921 For and on behalf of HR Green Development, LLC

Developer's Statement

I, the developer, have read and will comply with all of the requirements specified in this drainage report and plan.

Flying Horse Development, LLC

Drew Balsick Date

Vice President / Project Manager

Flying Horse Development, LLC 2138 Flying Horse Club Drive

Colorado Springs, CO 80921

El Paso County:

Filed in accordance with the requirements of the El Paso County Land Development Code, Drainage Criteria Manual, Volumes 1 and 2 and the Engineering Criteria Manual, as amended.

Joshua Palmer, P.E.

Date

County Engineer/ECM Administrator



Final Drainage Report – Flying Horse North I. General Purpose, Location and Description

a. Purpose and Scope

The Purpose of this Final Drainage Report (FDR) is to identify specific solutions to drainage concerns for onsite and offsite tributary areas resulting from the development of the subdivision to be platted. The FDR is to describe the onsite and offsite drainage patterns, existing and proposed storm infrastructure as it relates to water quality and stormwater detention for any proposed or existing facilities, the planned storm water management for the Flying Horse North development for Filing No. 3.

Preliminary Drainage Report for Flying Horse North Preliminary Plan and Final Drainage Report for Flying Horse North Filing No. 1 is a combined Preliminary Drainage Report (PDR) and Final Drainage Report (FDR) that was developed by Classic Consulting, latest revision June 2018. The combined PDR/FDR was approved by the County in September of 2018 and is included in Appendix F. This approved report identifies the proposed Filing No. 3 area for the PDR and Preliminary Plan portion of the report and the Filing No. 1 area for the FDR portion.

A more recent Master Development Drainage Plan (MDDP) was prepared by HR Green Development, LLC. and was approved by the County in September of 2022, entitled *Flying Horse North Master Development Drainage Plan* latest revision date of September 9, 2022. This MDDP also referenced the Classic Consulting report from 2018 for master drainage design of the proposed Filing No. 3 area.

The items discussed in this FDR include final plat layout, land uses, and drainage patterns for Filing No. 3. Included in this report are final hydrologic and hydraulic drainage calculations and design as required for the final design of the development of the single-family residential estate lot areas with assumed conservative drainage analysis for a future Flats area. This report references the aforementioned reports to compare and contrast findings in the final design to ensure that existing infrastructure and facilities are not negatively impacted by this development.

b. DBPS Investigations

Flying Horse North is split by the Arkansas River Basin and South Platte Basin. Within each of those river basins, the site stretches across the Black Squirrel Basin and East Cherry Creek Drainage Basins.

The Black Squirrel Drainage Basin Planning Study (DBPS) Preliminary Design Report prepared by URS Corporation was reviewed to determine existing plans and constraints that would influence the design of the Flying Horse North Development. The proposed plans for Flying Horse North are in general conformance with the DBPS.

Flying Horse North Filing No. 3 is located within a major portion of the Black Squirrel Creek Drainage Basin and there is a small portion to the east of the proposed development that is within the East Cherry Creek Drainage Basin. A Preliminary Drainage Report and Final Drainage Report for this area were prepared in June 2018 by Classic Consulting and approved by El Paso County in September of 2018, and a more recent MDDP by HR Green demonstrated the general drainage approach for this area where densities for the development will remain similar to the report.



For the portion of Flying Horse North which lies within the East Cherry Creek Drainage Basin, a DBPS does not currently exist, and this FDR is consistent with the 2022 MDDP which complies with standard El Paso County regulations regarding drainage within this corridor.

The majority of the Filing No. 3 area falls within the Black Squirrel Creek Basin which is to consist of 2.5acre single-family residential estate lots, the existing golf course, and a portion of future Flats development that is assumed at a conservative imperviousness for the purpose of this report. Proposed developed areas are provided with water quality and full spectrum detention prior to release offsite to the west. Areas that are tributary to Flying Horse Filing No. 1 have no increase in required stormwater quality or detention volumes. There is a relatively small area of 2.5-acre single-family lots that fall within the East Cherry Creek Basin that drain directly offsite. The future Flats development area and the proposed roadway within the East Cherry Creek Drainage Basin are detained on site prior to release to the east golf course area. There is no proposed basin transfer and therefore the historical drainage patterns are to remain in place including at the roadway and lots at the major basin delineation.

c. Stakeholder Process

There are no amendments to the current DBPS.

d. Agency Jurisdictions

Listed below are the jurisdictions that this project will conform to:

El Paso County

Federal Emergency Management Agency

e. General Project Description

Flying Horse North Filing No. 3 is in El Paso County jurisdiction and is located within the larger Flying Horse North subdivision, adjacent to Filing No. 1 and the existing golf course. The larger Flying Horse North development is bordered by Highway 83 to the west, Black Forest Road to the east, Cathedral Pines to the south, and High Forest Ranch to the north. The greater Flying Horse North area contains approximately 1,459 acres within the whole Section 36, Township 11 South, Range 66 West of the Sixth Principal Meridian, and a portion of Section 30 and 31, Township 11 South, and Range 65 West of the Sixth Principal Meridian. The Flying Horse Filing No. 3 area is 293.7 acres in total.

This FDR covers Filing No. 3 and includes offsite upstream and downstream areas to analyze existing and proposed drainageways and facilities. The Filing No. 3 area includes 145.53 acres of 2.5-acre single-family residential estate lots totaling 51 lots, one of which includes the previously platted Flying Horse North Filing No. 2 which is now platted to be a part of Filing No. 3 as lot number 4. The development includes the single-family residential estate lots, 60' width rights-of-way that include asphalt paved roadways with roadside swale sections and electric easements. There are basins to the east that are dedicated to future Flats development, one sub-basin within the Black Squirrel Creek Basin that is tributary to an existing detention facility in Filing No. 1 and one sub-basin within the East Cherry Creek Basin that is tributary to a proposed detention pond as a part of this filing. The future Flats area consists of 60' right-of-way similar to an urban local typical roadway section with tree lawn and detached sidewalk.

The Filing No. 3 area was previously assessed in the 2018 Classic Consulting report with a similar land use plan that included 2-acre single-family residential estate lots and roadways. This report assesses the lots as 2.5-acre lots. The layout shown in the developed conditions hydrology map of this report and the



corresponding construction drawings differs slightly from the approved FDR/PDR with adjusted roadway alignments and lot lines. However, the drainage patterns, typical roadway section, and land use densities are similar.

The existing vegetative cover is 90 percent as evidenced by a field survey and aerial imagery. The existing vegetation includes native grasses and weeds, shrubs, and pinyon pine trees. Previous clearing of future planned roadways was done several years ago, and native grass and weeds have covered those areas.

f. Data Sources

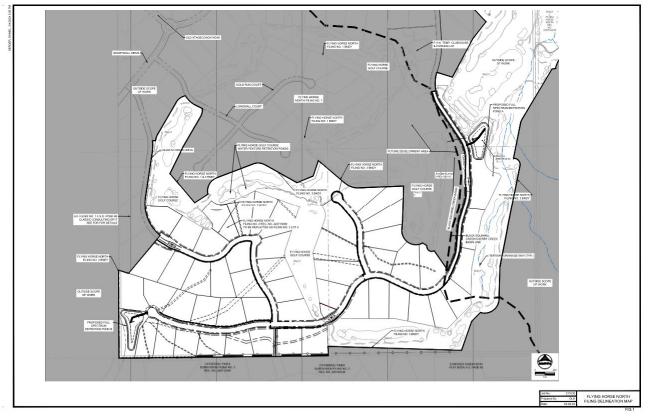


Figure 1 - Site Map

Listed Below are the technical resources reviewed in the preparation of this MDDP:

El Paso County Drainage Criteria Manual (DCM)

Mile High Flood District

NOAA Atlas 14

NRCS Soil Survey for El Paso County Area, Colorado

FEMA FIRM 08041C0305G and FIRM 08041C0315G (eff. 12/7/2018)

El Paso County Assessor Property Records



Preliminary Drainage Report for Flying Horse North Preliminary Plan and Final Drainage Report for Flying Horse North Filing No. 1 prepared by Classic Consulting – June 2018

Flying Horse North Master Development Drainage Report prepared by HR Green Development, LLC. – latest revision September 9, 2022

Flying Horse North Irrigation Reservoir Embankment Design Report - August 2018

g. Applicable Criteria and Standards

Per the DBPS and El Paso County Criteria Manual, flows from the proposed site will be limited to historic flows to maintain the stability of the existing channels within the drainage basins. The master plan follows the Drainage Criteria Manual for El Paso County which refers to the City of Colorado Springs Drainage Criteria Manuals as amended. Criteria within the County and City manuals refer to the Mile High Flood District manuals, particularly for extended detention basin design and runoff reduction calculations which are utilized in this report.

A distinct difference in the 2018 FDR/PDR and this report are the hydrologic methodologies utilized to compute peak runoff values. The 2018 Classic Consulting report utilized the NRCS Curve Number method in order to be consistent with their previous MDDP for the greater Flying Horse North master development. The NRCS Curve Number method was used for Filing No. 1 and the future development of Filing No. 3 for sub-basins that did not exceed 100 acres. Typically, the Rational Method is used for hydrologic computations when basin analysis is under 100 acres due to the NRCS Curve Number method yielding smaller minor and major storm event peak runoff values. The resultant hydraulics in this report are similar to that of the approved 2018 FDR/PDR on a basin-by-basin basis, however, any differences in calculated stormwater runoff will be discussed. The difference in methodologies between the 2018 report and this report result in larger cumulative stormwater runoff values reported for the minor and major storm events. Due to the more conservative nature of the Rational Method, cumulative peak flow rates are greater than that of the 2018 FDR/PDR for the minor and major storm events for downstream design points including existing channels and ponds that were designed and constructed as a part of the Filing No. 1 report and construction drawings.

HR Green has discussed this discrepancy in hydrologic methodology with El Paso County engineering staff and it has been expressed that the chosen method for hydrologic computations is the Rational Method for this report to ensure sound design of the storm infrastructure for Filing No. 3 including swales, channels, culvert pipes, inlets, and roadway capacities. It was discussed that no Filing No. 1 drainage infrastructure will require redesign or retrofits unless explicit discrepancies in detention volumes are discovered as the tributary areas and percent imperviousness for respective detention ponds have not changed significantly between the 2018 FDR/PDR and this report for Filing No. 3. The existing regional detention ponds have been assessed in this report and it is verified that required volumes due to development of Filing No. 3 are less than the 2018 FDR/PDR for the tributary areas contributing to Filing No. 1 ponds. Due to the use of the NRCS Curve Number method in the 2018 FDR/PDR, the peak runoff values in this report are larger than that of the approved 2018 FDR/PDR. As discussed with County engineering staff, while peak runoff values have increased due to the use of the Rational Method, there are no anticipated negative impacts to downstream offsite infrastructure because of this development as all other drainage parameters remain consistent with the 2018 FDR/PDR.



II. Project Characteristics

a. Location in Drainage Basin, Offsite Flows, Size

Flying Horse North is located within both the Black Squirrel Drainage Basin and East Cherry Creek Basin. The existing Filing No.1 and a large portion of the proposed Filing No. 3 is located within the Black Squirrel Drainage Basin. This drainage basin encompasses 10.9 square miles of mostly forested area and generally slopes from east to west and outfalls into Monument Creek. Black Squirrel is a sub-basin of the Arkansas River. The remaining filings and a small part of Filing No. 3 is located within the East Cherry Creek Basin. There is not a current planning study of the drainage basin, but generally it slopes from southwest to northeast. The basin eventually flows into the South Platte River.

For the East Cherry Creek one drainage basin consisting of five sub-basins is conveyed to the proposed detention pond at Design Point 2, Pond A. Two offsite basins are tributary to this pond from the north near the existing club building. The respective contributing flow from the sub-basins is shown in the table below:

Basin Name	Acreage	5 Year Flow (cfs)	100 Year Flow (cfs)
CC-34	0.89	1.0	2.9
CC-34.1	15.09	6.7	36.1
CC-34.2	1.84	4.9	8.7
CC-34.3	1.01	1.6	3.9
CC-34.4	3.44	7.9	14.6
OS-1	2.73	2.8	8.2
OS-2	0.34	1.3	2.3

The future Flats development area west of the proposed roadway drains directly to the roadway via overland sheet flow and is channelized within the curb and gutter and conveyed into three public CDOT Type R inlets: two 15' CDOT Type R on-grade inlets, and a 5' CDOT Type R curb sump inlet. These inlets ultimately drain to Pond A for water quality and detention. The area represented by the eastern half of the proposed roadway is channelized within the curb and gutter and makes its way down to a 10' CDOT Type R curb sump inlet which also is ultimately released into Pond A for water quality & detention. Areas within CC-34.1 drain directly offsite and are not directed to Pond A. These areas have 100 percent water quality runoff reduction as they are open space or 2.5 acre single family residential estate lots with grass buffers at the rear of the lots. These areas do not fall under the large lot exemption as they are calculated with a maximum of 11 imperviousness. UD-BMP runoff reduction calculations are provided in Appendix B to demonstrate that 100 percent water quality runoff reduction is achieved in these areas. Pond A has volume capacity for over-detention of these areas that drain directly offsite to the existing golf course to the east.

The northern basins of the filing follow natural drainageways, proposed roadside swales and proposed public culvert pipes that are analyzed for capacity. The northern basins ultimately direct stormwater runoff to existing Filing No. 1 Pond 6, Pond 7, and Tract I which outfalls to Flying Horse North Detention Pond 8 (DP17 of the 2018 Classic Consulting PDR/FDR, PCD No. SF-18-001). There are offsite basins that drain to Pond B that are consistent with the previous FDR's assumptions. The 2018 Classic Consulting FDR/PDR represented this area as future development of 2-acre lots that would drain due east through the existing golf course with future culvert crossings.



Most of the Filing No. 3 area is within the Black Squirrel Creek Basin. Generally, the areas north of proposed roadways within the filing follows the historic drainage pattern and ultimately flows to Flying Horse North Detention Pond 8 as described in the 2018 Classic Consulting FDR/PDR which is represented as Design Point 10 in this report. The southern areas containing proposed roadways and most of the 2.5-acre single family residential estate lots drain due west to proposed detention Pond B. The Filing No. 3 area has offsite flow from the Cathedral Pines Filing No. 2 subdivision that drains to roadside swales that convey the runoff to a proposed detention Pond B (DP19 of the 2018 Classic Consulting PDR/FDR).

The respective contributing flows from the sub-basins within the Black Squirrel Creek Basin are shown in the table below. The first table includes the onsite and offsite basins that contribute to Design Point 10 (Pond 8 of the Classic Consulting report) and the second table includes the onsite and offsite basins that contribute to Pond B within this filing.

Basin Name	Acreage	5 Year Flow (cfs)	100 Year Flow (cfs)
BS-18	33.90	12.6	60.1
BS-19	6.35	4.1	16.8
BS-20	23.79	9.6	48.5
BS-20.1	42.26	16.3	77.7
BS-20.2	4.32	2.5	10.1
BS-20.3	0.56	2.3	4.1
BS-21.1	15.24	8.5	34.3
BS-21.2	0.18	0.8	1.5
BS-21.3	50.92	17.7	85.0
BS-22	0.24	1.1	2.0
BS-22.1	16.87	8.8	38.4
BS-23	37.06	15.6	76.7
BS-23A	9.28	4.1	19.0
BS-23A.1	7.96	4.2	17.4

Sub-basins contributing to existing Pond 8 (Design Point 10 of this report):

Sub-basins contributing to proposed Pond B, Design Point 17 of this report:

Basin Name	Acreage	5 Year Flow (cfs)	100 Year Flow (cfs)
BS-21	0.77	3.0	5.4
BS-26	4.90	1.7	10.6
BS-27	9.68	5.6	22.9
BS-28	24.03	12.3	50.6
BS-28.1	5.76	2.8	12.5
BS-28.2	19.47	9.0	41.0
BS-28.3	0.54	2.5	4.5
BS-29	22.93	8.3	39.7
BS-30	11.53	4.9	20.4
OS-17	15.8	9.9	40.6
OS-18	13.00	8.2	33.7

There are four sub-basins that drain directly offsite due to the natural drainage patterns. These subbasins have relatively small areas within Filing No. 3 and include parts of the 2.5 acre single-family residential estate lots at the southeast & western edges of the development. These sub-basins have 100



BS-33

percent water quality runoff reduction due to grass buffers as demonstrated with the UD-BMP runoff reduction spreadsheets (see Appendix B). The sub-basins are listed in the table below:

Basin Name	Acreage	Acreage 5 Year Flow (cfs)				
BS-25	12.65	6.1	28.1			
BS-31	8.40	3.2	18.6			
BS-32	6.33	20	15 /			
BS-33	ADDITIONAL ANALYSIS OF THE EXISTING CONDITIONS					

OF THE SITE HAS BEEN COMPLETED AND ADDED TO APPENDIX B OF THIS REPORT. THE EXISITNG b the 2018 This Filing No. 3 CONDITIONS MAJOR FLOW VALUES HAVE ALSO BEEN Classic Consultir nts (when ADDED TO THIS TABLE FOR EASE OF REFERENCE AND comparing the N usness for SHOW THAT THERE IS MINIMAL INCREASE IN RUNOFF respective sub-b asin area, FROM THESE BASINS. THIS IS BECAUSE OF THE MINIMAL coefficient, or per nal design INCREASE OF PERCENT IMPERVIOUSNESS FOR THESE as compared to umbers as BASINS compared to the 2018 report are due to the change in hydrologic computation methodology as discussed in a previous section of this report. A table showing the Classic 2018 FDR/PDR NRCS Method peak

	runoff values compared to the HR Green 2024 FDR Rational Method peak runoff values is provided								
(below								
(Basin Name Acreage Classic 2018 Major Flows HRG 2024 Major Flows (Classic/HRG) (Classic/HRG) (Classic/HRG) (Classic/HRG) (Classic/HRG)								
2	BS-25/BS-25	12.7/12.65	17.3	28.1					
Ş	BS-31/BS-31	8.4/8.37	11.8	18.6					
(BS-32/BS-32	6.2/6.33	9.4	15.4					

While there is an increase in peak runoff in these tables from the 2018 report to this report, there is EXISTING CONDTIONS ANALYSIS OF discrepancy in methodology.

15.3

b. Compliance with D

8.9/8.91

BS-33/BS-33

This FDR is in general confor drainage flows of the East C detention facilities to limit the development will follow histor area for conveyance of storr The southeast area of the fill

BASIN BS-25 HAS BEEN COMPLETED AND THE RESULTS HAVE BEEN ADDED TO THIS TABLE. ADDITIONALLY, A STATEMENT WITHIN THE DESIGN POINT 21 DESCRIPTION HAS BEEN ADDED THAT IDENTIFIES THE EXISTING

VERSUS PROPOSED INCREASE OF

FLOWS.

rel DBPS and current multiple full spectrum rns. The Filing No. 3 wales throughout the ng detention facilities. en the Black Squirrel

21.9

Creek Basin and the Cherry Creek Basin determines the drainage pattern of the roadway and future development grading of the lots within and along the basin delineation. The roadway is designed to drain according to the basin delineation (west for Black Squirrel Creek Basin and east for Cherry Creek Basin) and future single-family lot developments shall be graded to follow this drainage pattern at the plot plan level.

Existing downstream infrastructure is currently limited to the historic drainage channels and minimal downstream improvements exist. As such, the site follows the DBPS and restricts offsite flow rates to not exceed historic flow rates. The sites ultimate outfalls will generally be along the same historic tributaries.



Although outfall rates will be at or below historic, the cumulative volume of runoff will increase and therefore downstream facilities may see an increase in the duration of flows. This may provide a net benefit to the downstream facilities by providing more water to assist with the sustenance of vegetation however it should be noted that increased volume may expedite potential erosion or channel movement. Any deviations from the approved 2018 Classic Consulting PDR/FDR in terms of runoff flow rate and water quality and detention volumes are assessed within this report to show compliance with the previously approved report in terms of capacities for drainage facilities including roadside swales, natural drainageways, and detention ponds (both onsite and offsite).

c. Site Characteristics

Per the NRCS web soil survey, the site is made up entirely of Type B soils. The ridge line between the Arkansas River and South Platte River Basins creates different soil environments for each. The portion of site that is within the Black Squirrel Drainage Basin, which includes Flying Horse Norse Filing No. 2 and No. 3, are predominately Elbeth sandy loam. The remaining filings are within the East Cherry Creek Basin which consists of Peyton sandy loam and Peyton-Pring complex. See Appendix A for the NRCS soil map.

Current ground cover varies between the two basins as well. Filings No. 2 and 3 are predominantly covered by Ponderosa Pine trees as a part of Black Forest and pasture. The remaining filings are short-to mid-grass prairie grasslands and former farmland which consists of non-native weeds and grasses. This portion of the site has very few, if any, trees and a minimal number of shrubs are found on the site.

d. Major Drainage Ways and Structures

No major drainage ways exist within the development; however, small tertiary tributaries are within the site currently and function to convey flows to unnamed tributaries of the Black Squirrel Creek. These informal drainage ways are assessed within this report for stormwater runoff capacity and water surface elevations during the 100-year event as future development of single-family residential lots with basement or walkout conditions is considered. Roadside swales are included as a part of the typical roadway section and are assessed within sub-basins to ensure that swale and culvert pipe capacities are met and do not result in excessive pooling in the roadway sections per code.

The existing minor drainage channels within the site are planned to be maintained to the maximum extent possible. These will continue to be used for conveyance of storm drainage flows. The limits of construction and disturbance plan for no significant earthwork alterations to the existing minor drainage channels that would affect the drainage patterns or capacity of the sections throughout the filing as they are proven to have sufficient capacities for their respective tributary areas and to maintain the natural features of the site including existing trees and vegetation.

Drainageways of note including roadside swales are described within this report with parameters to demonstrate compliance with swale design criteria and capacities. Culvert pipes are sized to convey upstream flow under proposed roadways and maintain historic drainage patterns. Natural tertiary drainageways and roadside swales are prescribed matting products for various areas in order to minimize erosion and sediment runoff downstream per hydraulic analysis.

There are two areas in which storm sewer infrastructure is designed, beyond culvert pipes for driveway and roadway crossings. The first area is the future Flats development area to the east where there is an urban roadway section. A deviation is to be approved for this roadway section. Conservative land use



areas were utilized for the hydrologic and hydraulic calculations to plan for future design and development of this area including Pond A. Storm sewer infrastructure in this area consists of two public CDOT Type R on-grade inlets & two public CDOT Type R sump curb inlets with public and private storm sewer pipes that drain to the private concrete forebay of the proposed private detention facility to the east. The second area that consists of storm sewer infrastructure is the Allen Ranch Road cul-de-sac to the southwest of the site where cumulative stormwater runoff is conveyed on the north and south roadside swales that are expanded ditch sections to accommodate the cumulative flow from the upstream design points. The expanded ditch sections further convey the runoff via private culvert pipes, a private 48" RCP culvert pipe from the north (Section L-L) expanded ditch section and private dual 42" RCP storm culvert pipes from the south (Section M-M) expanded ditch section. These two culvert pipes daylight to a Rip-Rap Rundown Rock Chute that is designed for energy dissipation and capacity of the cumulative flow that enters the private concrete forebay for Pond B.

e. Existing and proposed land uses

The existing Filing No. 3 area is open rangeland within a forested area consisting of sparse native grasses, weeds, and pinyon pine trees as well as baren pervious soil. The existing Filing No. 3 area consists of no development other than a previously cut-in maintenance pathway that was originally planned as the future roadway corridor and golf cart paths. As part of Filing No. 1, a road was constructed along with facilities to support a golf course. The Filing No. 3 development will connect to these existing roadways at the boundary between the two filings.

The 2018 Classic Consulting PDR/FDR assumed 2-acre single-family residential estate lot development with the same percent imperviousness within the filing area. This report includes the final design layout of 2.5-acre lots with rural roadway sections and a future Flats area with an urban roadway section. Any deviations in basin areas, land use acreages, and resultant composite coefficients are shown within this report and demonstrated to meet downstream stormwater runoff and volume capacities for proposed and existing facilities. The proposed land use of future development for Flats to the east of the filing differs from the assumed 2-acre residential lots in the same area. The downstream existing detention facility that this future development area is tributary to is assessed within this report to demonstrate that the existing pond has sufficient volume and requires no retrofitting.

III. Hydrologic Analysis

a. Major Basins and Sub-basins

Major Basin Description

- Previous basin study: Black Squirrel Drainage Basin Planning Study
- Per FEMA FIRM 08041C0305G and 08041C0315G (eff. 12/7/2018), Flying Horse North has the East Cherry Creek run through the northwest portion of the site. Currently, FEMA shows a LOMR effective April 4th, 2019 Base Flood Elevations and Zone A. Per the El Paso County Land Development Code Chapter 8 Section 8.4.2.B.1.e.i, the base flood elevations for Zone A will be determined once the platted lots are solidified and are confirmed within 300-ft of the current floodplain designation. Certification of the flood elevations will be via the FEMA CLOMR/LOMR process or Floodplain Certification Letter.



• There are no FEMA Floodplains within this Filing

The site has been divided into several major drainage basins where each basin is tributary to a full spectrum detention pond facility with the exception of basins that drain directly offsite which have supporting water quality runoff reduction calculations. These basins and associated sub-basins are described in more detail in the next section of this report.

This FDR utilizes a similar naming convention for the basins and sub-basin as the 2018 Classic Consulting PDR/FDR in order to more easily compare and contrast the final developed drainage conditions for the filing.

Existing Subbasin Description

The existing conditions for Filing No. 3 are consistent with the conditions and hydrology map presented within the 2022 HR Green Development MDDP. The previous report's existing and developed conditions drainage maps are included in the appendix section of this report for reference. The developed conditions drainage map within the Filing No. 1 area are now the existing conditions of that area for this report and the existing conditions drainage map within the 2022 MDDP within Filing No. 3 remain as is and is utilized as the existing conditions drainage map for this report.

The 2022 HR Green Development MDDP drainage maps represent the existing conditions for assessment of the Filing No. 3 development as there has been no disturbance outside of the previously developed Filing No. 1 area. Therefore, all existing topography and historical drainage patterns remain the same.

The onsite basins relevant to this report that are utilized in the 2018 report are the following: Basins BS-18, BS-19, BS-20, BS21, BS-22, BS23, BS-23A, BS25, BS-26, BS-27, BS-28, BS-29, BS-30, BS-31, BS-32, and BS-33.

The offsite basins relevant to this report that are utilized in the 2018 report are the following: OS-17 and OS-18.

Proposed Subbasin Description

The net area of some basins described in this report may differ from the 2018 Classic Consulting FDR/PDR due to changes of alignment of proposed roads and slight adjustments of the delineations with new topographic survey information. The net $Q_5 \& Q_{100}$ values may differ in this report because of the different methodologies used between the reports. Classic Consulting's FDR had used a Curve Number Method to report 5-year and 100-year drainage flows while this report had used the Rational Method to report those values. The rational method yields higher minor and major storm peak runoff values. Because of these two discrepancies, the values reported in this FDR may be higher across all design points that had also been evaluated in Classic Consulting's FDR from 2018. After conversations with El Paso County, discrepancies in design, basin delineation, and calculation methodology do not require HR Green to redesign any existing storm infrastructure that has been built in Flying Horse North Filing No. 1 including culvert pipes, channels, and rock chutes. The existing Pond 8 (Design Point 10 of this report) is assessed for detention volumes as a result of the development of Filing No. 3 for areas that are tributary to the existing pond.



The following design points are presented on the Developed Conditions Drainage Map within the appendix and are described as follows:

Design Point 1 (Q_5 = 4.4 cfs, Q_{100} = 12.1 cfs) represents the developed flows from basins OS-1 & -34.3. These flows are captured at a 15' CDOT type R on-grade inlet. The on-grade inlet is capable of capturing 4.4 CFS (100%) of the 5-year flow and 10.5 CFS (87%) of the 100-year flow, leaving a total of 0 & 1.6 CFS left as bypass, respectively, to be channelized in EPC type A curb and gutter and captured at design point 1.1. The captured flow will travel down to design point 1.1 as well via an 18" RCP storm sewer.

Design Point 1.1 (Q_5 = 1.2 cfs, Q_{100} = 7.5 cfs) represents the developed direct basin flow from basin CC-34 as well as the bypass flow mentioned above in design point 1 and design point 1.2. These flows will be channelized into the streets curb and gutter to design point 1.1 where they will be captured by a 5' CDOT type R sump inlet. All flow will be captured and piped via 24" RCP storm sewer to converge with flows captured at design point 1.3, then down to Pond A at design point 2. Flows captured within this design point shall only be from the East side of the Black Squirrel Creek and Cherry Creek basin line so that drainage patterns stay consistent with pre-development flows.

Design Point 1.2 (Q_5 = 7.9 cfs, Q_{100} = 14.6 cfs) represents the developed basin flows from basin CC-34.4. Flows from this basin have been calculated to be conservative to account for future development and will be directed via EPC type A curb and gutter to be captured by a 15' CDOT type R on-grade inlet. The on-grade inlet is capable of capturing 7.7 CFS (97%) of the 5-year flow and 11.6 CFS (79%) of the 100-year flow, leaving a total of 0.2 CFS and 3.0 CFS left as bypass, respectively, to be channelized and captured at design point 1.1. The captured flow will travel down to design point 1.1 as well via a 24" RCP storm sewer.

Design Point 1.3 (Q_5 = 6.2 cfs, Q_{100} = 11.0 cfs) represents the developed basin flows from basins CC-34.2 & OS-2. These basins represent the east side of the proposed roadway and are to be channelized via EPC type A curb and gutter. Channelized flows are directed to a low point at this design point and are captured with a 10' CDOT type R sump inlet. Captured runoff is combined with flows from design point 1.1, and are routed to Pond B via a 36'' RCP storm sewer.

Design Point 2 (Q_5 = 26.2cfs, Q_{100} = 76.6 cfs) represents the developed flows from basins CC-34, CC-34.1, CC-34.2, CC-34.3, CC-34.4, OS-1 & OS-2. Developed flows will be routed to this location via the proposed public roadway curb and gutter to two public CDOT Type R curb sump inlets. The public storm infrastructure conveys the runoff to Pond A to meet WQCV, EURV, & 100-Year detention capacity and release pre-development flow quantities (see appendix D for pond calculations).

Design Point 4 (Q_5 = 8.5 cfs, Q_{100} = 34.3 cfs) represents the developed flows from basin BS-21.1. These flows are to channelize into channel section D-D and end up at design point 4 where a 36" RCP culvert has been sized to route the flows underneath Bourbon Court (see Appendix C for culvert design). These flows ultimately combine with basin BS-21.2, BS-21.3, BS-20, BS-20.1, & design point 5, which flow to a Flying Horse North golf course retention pond at design point 6.

From Classic Consulting's FDR for Flying Horse North Filing No. 1, the basin that design point 4 contains, basin BS-21.1, was originally a part of basin BS-21 as seen in Classic Consulting's FDR (see appendix F). Classic's FDR reported a total basin area for BS-21 to be 69.5 acres with a Q_5 =23.9 CFS and a Q_{100} =103.0 CFS. The cumulative basin BS-21 (this includes basins BS-21 through BS-21.3) shown in this report have a net area of 66.34 acres, a net Q_5 = 30.1 CFS, and a net Q_{100} =126.3 CFS. See the statement



preceding design point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR.

Design Point 5 (Q_5 = 4.7 cfs, Q_{100} = 14.2 cfs) represents the developed flows from basins BS-20.2 & BS-20.3. Flows from these basins sheet flow into typical roadside ditch sections to the end of the cul-desac where the flows from each basin will converge at design point 5. At this design point, the flows will be channeled through a weir cutout section within the typical roadside ditch section (see weir calculations in appendix C) and ultimately be led to design point 6 via natural channels existing downstream.

Design Point 6 (Q_5 = 57.7 cfs, Q_{100} = 261.3 cfs) represents the cumulative developed & existing flows of the following basins: BS-20, BS-20.1, BS-20.2, BS-20.3, BS-21.1, BS-21.2, & BS-21.3. This design point is located within the Flying Horse North golf course and is currently an existing retention pond within the golf course to provide a water feature for the course. Flows from this design point are fed into the next retention pond located within the golf course, design point 7.

From Classic Consulting's FDR for Flying Horse North Filing No. 1, the basins that design point 6 contain as mentioned above (Classic Consulting pond 6) were originally a part of basins BS-20 & BS-21 from Classic's FDR. Classic Consulting's FDR cumulative reporting of basins BS-20 & BS-21 were 143.4 acres with a net Q_5 =48.5 CFS and a net Q_{100} =215.4 CFS. The cumulative basins draining towards design point 6 shown in this report have a net area of 137.3 acres, a net Q_5 = 57.6 CFS, and a net Q_{100} =261.1 CFS. See the statement preceding design point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR.

Design Point 7 ($Q_5 = 71.7$ cfs, $Q_{100} = 318.4$ cfs) represents the cumulative developed flows of basins BS-19, BS-22, BS-22.1, and all basins associated with design point 6. Flows from the proposed area of disturbance in basins BS-22 and BS-22.1 are to drain down an existing swale labeled G-G on the drainage map and will be lined with a proposed turf reinforced matt. This design point is located within the Flying Horse North golf course and is currently an existing retention pond within the golf course to provide a water feature to the course. Flows from this design point exit from the pond via an existing permanent turf reinforced matt (TRM) channel with reinforced rock check dams. This channel ultimately leads the flow down to two existing 60" RCP culverts at design point 8, to pass beneath Quartz Creek Drive and into design point 10 where an existing detention pond has been designed by Classic and is described within their FDR from 2018.

From Classic Consulting's FDR for Flying Horse North Filing No. 1, the basins that design point 7 contain as mentioned above (Classic Consulting Pond 7) were originally a part of basins BS-19, BS-20, BS-21, BS-22 from Classic's FDR. Classic Consulting's FDR cumulative reporting of these basins was 167.8 acres with a net Q_5 =62.7 CFS and a net Q_{100} =266.9 CFS. The cumulative basins draining towards design point 7 shown in this report have a net area of 160.7 acres, a net Q_5 =71.7 CFS, and a net Q_{100} =318.4 CFS. See the statement preceding design point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR.

Design Point 8 (Q_5 = 99.8 cfs, Q_{100} = 455.3 cfs) represents the cumulative developed flows from basins BS-18, BS-23, and all basins associated with design point 7. Flows leading to this design point converge at a low point where two 60" RCP culvert pipes are to lead the flow underneath Quartz Creek Drive and into the existing detention pond at design point 10 (see Appendix for culvert design).

From Classic Consulting's FDR for Flying Horse North Filing No. 1, the basins that design point 8 contain as mentioned above (Classic Consulting design point 16) were originally a part of basins BS-18, BS-19,



BS-20, BS-21, BS-22, & BS-23 from Classic's FDR. Classic Consulting's FDR cumulative reporting of design point 16 was 238.7 acres with a net $Q_5=78$ CFS and a net $Q_{100}=390$ CFS. The cumulative basins draining towards design point 8 shown in this report have a net area of 231.6 acres, a net $Q_5=100.1$ CFS, and a net $Q_{100}=455.6$ CFS. See the statement preceding design point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR.

Design Point 9 (Q_5 = 4.2 cfs, Q_{100} = 17.4 cfs) represents the developed flows from basin BS-23A.1. Basin flows drain into a roadside ditch that will lead flows from the basin towards a low point within Quartz Creek Drive where an existing 24" RCP culvert will carry flows into an existing concrete forebay at design point 10, where an existing detention facility (Classic Consulting pond 8) will detain flows.

From Classic Consulting's FDR for Flying Horse North Filing No. 1, the basins that design point 9 contain as mentioned above were originally a part of basin BS-23A from Classics FDR. Classic Consulting's FDR cumulative reporting of basin BS-23A was 16.3 acres with a net $Q_5=12$ CFS and a net $Q_{100}=38.3$ CFS. Basin BS-23A.1 draining towards design point 9 shown in this report has a net area of 7.8 acres, a net $Q_5= 4.1$ CFS, and a net $Q_{100}=17.1$ CFS. See the statement preceding Design Point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR.

Design Point 10 (Q_5 = **108.1 cfs, Q**₁₀₀ = **491.7 cfs)** represents the developed and existing flows from basins BS-18 through BS-21.3, excluding basin BS-21. All basins that flows to this design point are to be captured in an existing detention facility that was constructed during FHN Filing No. 1 and is referenced in Classic Consulting's FDR as pond 8. Flows entering the facility from design points 8 and 9, which account for all basins except for basin BS-23A, are entering the concrete forebay via dual 60" RCP culverts (DP8) and a single 24" RCP culvert (DP9). Run-off from BS-23A is entering the detention facility via sheet flow from the south.

A pond design description as provided by the 2018 Classic Consulting FDR is provided in section B of the proposed subbasin descriptions. The calculated tributary area entering the pond at design point 10 (Classic Consulting design point 17) reported in Classic Consulting's FDR was 255 acres with total inflows of Q_5 =85 CFS & Q_{100} =383 CFS. The calculated tributary area entering Pond 8 as calculated in this report is 248.9 acres at 8.74 percent impervious with total inflows of Q_5 =108.1 CFS & Q_{100} =491.7 CFS. See the statement preceding Design Point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR. While peak runoff values may have discrepancies due to hydrologic calculation methodologies, the tributary area acreages and percent imperviousness parameters yield a decrease in required detention volumes and therefore no pond infrastructure retrofits are proposed.

Design Point 11 (Q_5 = 3.0 cfs, Q_{100} = 5.4 cfs) represents channelized developed flows from basin BS-21. These flows drain west towards an 18" RCP culvert that will cross underneath Bourbon Court (see Appendix C for culvert design). After passing through the culvert, the flows continue in a typical roadside ditch section west and converge with basin BS-28.1 at design point 12.

Design Point 12 ($Q_5 = 5.9$ cfs, $Q_{100} = 17.9$ cfs) represents the culmination of flows from design point 11 and basin BS-28.1. Continued flows from design point 11 are carried via a typical roadside ditch section down to design point 12. Run-off from basin BS-28.1 sheet flows down into the typical roadside ditch sections along Allen Ranch Road and a portion of Waterhole Way near the intersection of the two aforementioned roads. The cumulative flows enter a 24" RCP culvert at design point 12 where the flows



will continue down to design point 14 via a modified roadside ditch section seen as Channel Section R-R and then into a wider Channel Section L-L (see Appendix C for channel section analysis & culvert design).

Design Point 13 (Q_5 = 9.0 cfs, Q_{100} = 41.0 cfs) represents the developed flows from basin BS-28.2. Most of the run-off within the basin will be sheet flow, but as the water flows west, it will begin to channelize in a natural swale which has been analyzed in two locations within this subbasin as channel section E-E & F-F (see Appendix C for analysis). Flows from the basin, as well as the road run-off from the east side of Waterhole Way, which is captured in a typical roadside ditch section, will converge at design point 13 where a 36" RCP culvert will carry flows underneath Waterhole Way (see Appendix C for culvert design). These flows ultimately run through basin BS-28, into a modified roadside ditch section to design point 14, and are finally captured in a detention facility at design point 17.

Design Point 14 (Q_5 = 29.7 cfs, Q_{100} = 114.0 cfs) represents the cumulative developed flows from basins BS-28 through BS-28.3, and BS-21. Flows from basins BS-28.1 and BS-28.2 have already been described in design points 12 and 13 respectively. Flows from basin BS-28 are mostly sheet flow at the north east section of the subbasin until they collect into natural channels analyzed in channel sections K-K & J-J (see Appendix C for analysis). Run-off from basin BS-28.3 is sourced from the west side of street 2 and is captured in a typical roadside ditch and released via a weir cutout (see Appendix C for weir design) into a natural channel which has been assessed as channel section J-J. Design point 14 then converges all basin flows to a low point on the north-east side of the cul-de-sac at the end of Allen Ranch Road. At this low point where the modified roadside ditch section L-L ends, a 48" RCP culvert will direct flows to a rock chute designed to convey flows down into Pond B at design point 17 (Classic Consulting design point 19).

From Classic Consulting's FDR for Flying Horse North Filing No. 1, the basins that design point 14 contain (Classic Consulting design point 18) were originally a part of basin BS-28 from Classics FDR. Classic Consulting's FDR reporting of basin BS-28 was 36.9 acres with a Q_5 =9.3 CFS and a Q_{100} =49.4 CFS. Basins BS-28 through BS-28.3 as well as BS-21 now drain to design point 14 (Classic Consulting design point 18) as shown in this report and have a net area of 50.6 acres, a net Q_5 = 29.7 CFS, and a net Q_{100} =114.0 CFS. See the statement preceding design point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR.

Design Point 15 (Q_5 = 21.4 cfs, Q_{100} = 93.8 cfs) represents the cumulative flows developed and existing flows from basins OS-18, BS-29, & BS-30. Run-off from basin BS-30 sheet flows north into the typical roadside ditch on the south side of Allen Ranch Road where the ditch section will evolve into Channel Section S-S to accommodate for larger driveway culverts as flow increases downstream (see Appendix C for analysis). Flows from basins OS-18 & BS-29 sheet flow into natural channel sections N-N & O-O where they will converge with the flows of BS-30 into a modified roadside ditch section analyzed as Channel Section Q-Q (see Appendix C for analysis). These flows ultimately continue west towards design point 16 where they are collected in dual 42" RCP culverts near the beginning of the cul-de-sac at the end of Allen Ranch Road to be discharged into a rock chute that will convey flows to Pond B at design point 17 (Classic Consulting design point 19).

Design Point 16 (Q_5 = 36.9 cfs, Q_{100} = 157.3 cfs) represents the cumulative flows from basins OS-17 & BS-27, and design point 15. Run-off from basins OS-17 flow through and channelize in BS-27. A portion of the flow from BS-27 sheets off into the modified roadside ditch section Channel Q-Q, while most flow from BS-27 channelizes and converges into the modified roadside ditch Channel M-M at the western end



of Allen Ranch Road (see Appendix C for channel analysis). At the end of channel section M-M, flows will be captured in dual 42" RCP culvert pipes and released into a rock chute designed to convey flows into Pond B (Classic Consulting design point 19).

Design Point 17 (Q_5 = 68.2 cfs, Q_{100} = 281.8 cfs) represents the cumulative developed and existing flows from basin BS-26 and design points 14, & 16. Flows from basin BS-26 are direct sheet flow into the detention pond that is proposed at design point 17. Design points 14 & 16 enter the detention pond via a 48" RCP culvert, crossing the cul-de-sac at the end of Allen Ranch Road, and a pair of 42" RCP culverts at the western end of the modified roadside ditch section M-M, respectively. These culverts discharge into a rock chute that leads flows down into the pond's concrete forebay (see Appendix C for rock chute design). The proposed detention facility sizing is described in the following section.

According to Classic Consulting's FDR for Flying Horse North Filing No. 1, the basins that design point 17 contain (Classic Consulting design point 19) were originally a part of basins OS-17, OS-18, BS-28, BS-29, & BS-30 from Classics FDR. Classic Consulting's design point 19 did not originally contain basin OS-18, BS-29 or BS-30 but instead had those draining into a separate pond at design point 18 of Classics FDR. The proposed design being conveyed in this report now joins Classic Consulting's two separate ponds at design point 17 (Classic Consulting design point 18 & 19). The cumulative acreage of Classic's design points 18 and 19 were reported as 123.4 acres, the net Q₅=38.4 CFS, and the net Q₁₀₀=241 CFS. Design point 17 contains a tributary area of 128.4 acres. For more explanation of the difference between Classic Consulting's 2018 FDR report values for these basins as compared to the values being reported in this FDR, see the statement preceding the design point 1 description.

Design Point 18 ($Q_5 = 3.2 \text{ cfs}$, $Q_{100} = 18.6 \text{ cfs}$), Design Point 19 ($Q_5 = 3.0 \text{ cfs}$, $Q_{100} = 18.6 \text{ cfs}$), Design Point 20 ($Q_5 = 5.2 \text{ cfs}$, $Q_{100} = 21.9 \text{ cfs}$) represent smaller basins that will continue to sheet flow off-site to the south. These basins represent mostly golf course development and a small portion of the proposed developed 2.5 acre lots. Given the lot size, no water quality is required. However, permanent sediment basins will be installed downstream of the golf course development to provide sediment control. Developed flows released from these basins will not be significantly different than the pre-development flows. See the statement preceding Design Point 1 description for an explanation of discrepancies between values reported here and values reported in Classic Consulting's 2018 FDR. While peak runoff values may have discrepancies due to hydrologic calculation methodologies, the tributary area acreages and percent imperviousness parameters yield a decrease in required detention volumes and therefore no pond infrastructure retrofits are proposed.

Design Point 21 (Q_5 = 6.1 cfs, Q_{100} = 28.1 cfs) represents basin BS-25 which flows off-site to the west and converges with outfall flows from Pond 8. This basin consists entirely of 2.5 acres residential lots that sheet flow into natural drainage ways. Existing flows off-site as reported from this basin in the 2018 FDR/PDR from Classic Consulting report 17.3 CFS for the major storm event. See section II.A for a comparison of existing and proposed conditions flowing off-site. Over-detention is provided in the proposed ponds for the Filing as this basin drains directly off-site. Grass buffers provide 100 percent water quality runoff reduction. See Appendix D for UD-BMP calculations showing the runoff reduction.

b. Water Quality and Detention Facilities

There are two water quality and full spectrum detention ponds that are proposed within this filing. The detention ponds are designed to provide the required volume stages for Water Quality Capture Volume (WQCV), Excess Urban Runoff Volume (EURV), and the 100-year stage. The UD-Detention spreadsheet



is utilized to determine basin sizing and create a stage-storage table to design the outlet structures with orifice plates and restrictor plates. The outlet structures and plates are designed to achieve the target release rates of the various stages: WQCV at 40 hours, EURV around 68 hours (may vary based on pond conditions), and the 100-year volume at 72 hours. The developed condition outlet flow rates are not to exceed predeveloped conditions. The ponds include the required infrastructure such as concrete forebays, an emergency spillway with rip-rap weirs, concrete trickle channels, and a 2.5-foot depth micropool attached to the outlet structure. Ponds include 15' width maintenance paths with vehicular access to the bottom of pond to access forebays and outlet structures for continued maintenance. The pathways have an access from the public right-of-way and proper turning radii and longitudinal and cross slopes for a maintenance vehicle. The ponds include 1.0' of freeboard to the emergency spillway berm of the pond with the crest elevation at or above the 100-year water surface elevation. The spillways are sized with a trapezoidal weir for the 100-year inflow with rip-rap prescribed for the outflow velocity.

The proposed ponds and assessment of an existing downstream pond are described below.

Pond A (Design Point 2, Classic Consulting Design Points 18, 19 Combined) provides water quality and full spectrum detention for the stormwater runoff from Basin CC34, 34.1, 34.2, 34.3, 34.4, OS-1, and OS-2. These basins include offsite area of undeveloped area, future development of Flats and the proposed urban roadway section located on the east side of the filing. As shown in the hydrology calculations summary table, Pond A has a tributary area of 25.3 acres with an imperviousness of 32.84% which includes roof, pavement, landscaped/lawn, and undeveloped land use categories. The impervious areas used in the future Flats development area are conservative and are to be assessed in a future filing FDR. The pond includes 1.0-foot of freeboard to the top of berm and the 100-year water surface elevation is below the crest of the emergency spillway weir.

The MHFD UD-Detention spreadsheet yields the following pond sizing results:

Proposed Pond A – Flats Area

WQCV	EURV	100-year	Total Required	Total Required	Total Design
(ac-ft)	(ac-ft)	(ac-ft)	Volume (ac-ft)	Volume (CY)	Volume (CY)
0.350	0.570	0.933	1.853	2,989	

Pond hydraulics are described in the following table:

	Peak Inflow (cfs)	Design Release/Outflow (cfs)	Pre-Development Release(cfs)	Time to Drain 99% of Inflow Volume (hrs)
Minor Storm (Q5)	26.5	2.1	10.9	76
Major Storm (Q100)	67.6	24.0	44.3	73

(Ownership and maintenance by the Flying Horse North HOA)

Pond A includes a concrete forebay sized for the required volume of the inflow, a 2-foot width concrete trickle channel with 6" vertical concrete curb, a 2.5-foot depth concrete micro pool, and an outlet structure that is designed as a single CDOT Type C Inlet that is to include a top trash rack, orifice plate, and restrictor plate on the outlet pipe.



Pond B (Design Point 17) provides water quality and detention for the stormwater runoff from Basins BS-21, BS-27, BS-26, BS-28, BS-28.1, BS-28.2, BS-28.3, BS-29, BS-30, OS-17, and OS-18. These basins include offsite area of undeveloped area assumed as future 2.5 acre lot development, future development of Flats and the proposed urban and local roadway sections. While the Flats area falls on the west side of the high point ridge near Allen Ranch Road, it is anticipated that the future roofs will drain due east into Allen Ranch Road. As shown in the hydrology calculations summary table, Pond B has a tributary area of 128.4 acres with an imperviousness of 10.04% which includes roof, pavement, landscaped/lawn, and undeveloped land use categories. The pond includes 1.0-foot of freeboard to the top of berm and the 100-year water surface elevation is below the crest of the emergency spillway weir.

The MHFD UD-Detention spreadsheet yields the following pond sizing results:

WQCV	EURV	100-year	Total Required	Total Required	Total Design
(ac-ft)	(ac-ft)	(ac-ft)	Volume (ac-ft)	Volume (CY)	Volume (CY)
0.719	0.493	3.534	4.746	7,657	13,224

Proposed Pond B – Estates Area

Pond hydraulics are described in the following table:

	Peak Inflow (cfs)	Design Release/Outflow (cfs)	Pre-Development Release(cfs)	Time to Drain 99% of Inflow Volume (hrs)
Minor Storm (Q5)	73.1	18.7	60.3	78
Major Storm (Q100)	255.5	161.5	245.6	69

(Ownership and maintenance by the Flying Horse North HOA)

Pond B includes a concrete forebay sized for the required volume of the inflow, a 2-foot width concrete trickle channel with 6" vertical concrete curb, a 2.5-foot depth concrete micro pool, and an outlet structure that is designed as a dual CDOT Type C Inlet that is to include a top trash rack, orifice plate, and restrictor plate on the outlet pipe.

Existing FHN Pond 8 (HR Green Design Point 10, Classic Consulting Design Point 17) provides water quality and detention for the stormwater runoff from Filing No. 1 and part of Filing No. 3 as well as offsite basins as described in the 2018 Classic Consulting FDR/PDR for the full build-out conditions. These basins include offsite area of undeveloped area assumed as future 2.5-acre lot development, golf course areas, and the roadways. The 2018 report has hydrology calculations and lists the acreage and percent imperviousness for the final developed conditions for the full build out within the MHFD UD-Detention spreadsheet for the Pond 8 Full Buildout conditions which consists of assumed future developed conditions for 2-acre single-family residential estate lots within Filing No. 3 with assumed roadway alignments. The 2018 FDR/PDR calculation lists a tributary area of 255 acres at 10.0 percent impervious. The final developed conditions hydrology tabulations for Filing No. 3 are provided within this report and closely compare to that of the 2018 report with a slight decrease in the tributary area and imperviousness of 8.79 percent. Due to the decrease in these figures, there is no expansion of volume required in the pond.



The WQCV, EURV, and 100-year volumes for the Existing FHN Pond 8 detention facility for as-built conditions and per calculations within this report are shown below for comparison:

	Tributary Area (ac)	Percent Impervious (%)	WQCV (ac-ft)	EURV (ac-ft)	100-year (ac-ft)	Total Required Volume (ac-ft)	Total Required Volume (CY)
2018 Classic Consulting FDR/PDR	255.00	10.00	1.424	0.973	7.011	9.408	15,178
2023 HR Green FDR	248.93	8.74	1.244	0.791	6.614	8.649	13,954

Existing FHN Pond 8

The existing downstream pond that was designed and constructed per the 2018 Classic Consulting FDR/PDR and Construction Drawings has sufficient capacity for the Filing No. 3 development. The 2018 report assumed a higher density of 2.0-acre single family residential estate lots within the Filing No. 3 area including the area now designated for future development of Flats but did utilize the same 11 percent imperviousness figure for the lots. While the Flats area within Filing No. 3 results in a higher imperviousness for its respective sub-basins, the overall imperviousness and tributary area to the downstream Existing Pond 8 within Filing No. 1 is decreased due to more of the Flats Area being tributary to proposed Detention Pond A. A UD-Detention spreadsheet with inputs for the final design parameters within this report (248.9 acres at 8.74 percent impervious) with the as-built conditions of the pond is provided within the appendix to demonstrate that the existing pond was built with sufficient volume and infrastructure for the final design conditions of Filing No. 3. The only potential retrofitting of the pond is a swap out of a new orifice plate to maintain the WQCV release rate of 40 hours which has fallen to 37 hours for the time to drain 99% of inflow volume for the final design.

A comparison of the existing conditions and proposed conditions releasing off-site from the identified Filing No. 3 boundary into both Black Squirrel Creek and Cherry Creek is provided below to show that the detention being provided on site from the existing pond 8 and proposed ponds in Filing No. 3 will negate any impact downstream.

Basin Identification	Existing Conditions (HRG MDDP 2022)	Proposed Conditions (HRG Filing 3 FDR 2024)
Black Squirrel Creek	784.8 CFS	498.5 CFS
Cherry Creek	57.4 CFS	24.0 CFS

c. Methodology

Design rainfall was determined utilizing Table 6-2 from the City of Colorado Springs Drainage Criteria Manual to determine the 5-year and 100-year rainfall values for the 1-hour events. The 1-hour rainfall depths are 1.5 and 2.52 in/hr respectively.

The proposed development will consist of 50 2.5-acre single-family residential estate lots which are assumed at a percent imperviousness of 11% per the County ECM Table 3-1 Typical Values of Percent



Impervious within Appendix L of the ECM which provides guidance for larger rural lot developments. Existing golf course areas are to remain undisturbed and utilize a land use category of "lawn" with a percent imperviousness of 2% per the County ECM Table 6-6 land use table. Composite coefficients, rainfall intensities, and runoff flow rates are calculated on a Rational Method spreadsheet and provided within the Appendix. As discussed previously, the Rational Method used in this report will result in higher peak flow rates for the minor and major storm events as compared to the 2018 Classic Consulting FDR/PDR which utilized the NRCS Curve Number Method. Design points within Filing No. 3 are designed per the findings of this report and existing Filing No. 1 storm infrastructure and design points are to remain as-is.

Mile High Flood District (MHFD) UD-BMP Runoff Reduction calculations are provided to demonstrate WQCV reduction for the sub-basins that drain directly offsite that have grass buffer to provide 100 percent runoff reduction. The MHFD UD-Detention spreadsheet is utilized for stormwater detention basin sizing and outlet structure design to meet standard release rates at or lower than historical drainage rates. The outlet structure orifice plate and restrictor plate for the proposed detention ponds located are designed to meet standard release rates of 40 hours for Water Quality Capture Volume (WQCV), as near 68 hours for Excess Urban Runoff Volume (EURV) as feasible, and 72 hours for the 100-year storm volume. Reference to the 2018 Classic Consulting PDR/FDR set of calculations and spreadsheets is included to demonstrate compliance and consistency with the previously approved report which anticipated similar land uses and basin acreages tributary to existing stormwater facilities.

IV. Hydraulic Analysis

a. Major Drainageways

There are no major drainageways that exist within the development of Filing No. 3; however, small tertiary tributaries are within the site currently and function to convey flows to unnamed tributaries of the Black Squirrel Creek. These tertiary drainage ways are analyzed within this report to assess the water surface elevation within the swales during the 100-year storm event and determine buildability of lots adjacent to these sections. Roadside swales are to be constructed at a minimum to meet the typical roadway section (4:1 for 10' and 3:1 for 9' resulting in a total swale depth of 2.5'). The roadside swales are assessed along the roadways that capture sub-basins and result in cumulative flow. Downstream roadside swales to the north and south of Allen Ranch Road are expanded along the road to accommodate the cumulative flow from upstream tributary areas. A 30' width Drainage Easement is platted in the areas of Allen Ranch Road in which expanded ditch sections will be needed for County maintenance access.

Allen Ranch Road terminates at a cul-de-sac where private storm culvert pipes convey the stormwater runoff to a rip-rap rundown rock chute that drains directly to the concrete forebay of Pond B. The Rock Chute is designed per the National Resources Conservation Service Rock Chute Design Data spreadsheet, a publicly available design worksheet created by the U.S. Department of Agriculture last modified on July 17, 2023. The Rock Chute data sheets are provided within the Appendix. A portion of the rock chute falls within Lot 19. A Drainage Easement is platted within Lot 19 for continued access for maintenance by the HOA and/or the County.

b. Storm Sewer Infrastructure and Culvert Pipes



The Filing No. 3 development consists of an area of future Flats development to the east of the filing with an urban roadway section that contains a public storm system to capture and convey stormwater runoff from the future developed areas that drain to the public roadway. The storm system is relatively small with a total of four CDOT Type R inlets, two on-grade inlets sized at 15' each, and two sump inlets sized at 10' & 5', as well as public and private storm sewer pipes that outfall to the concrete forebay of Pond A. UD-Inlet calculations as well as hydraulic grade analysis reports are provided within the Appendix of this report to demonstrate roadway, inlet, and pipe capacities of the proposed storm system.

The remainder of the filing consists of rural development with 2.5-acre single family residential estate lots and rural roadway sections with roadside swales. The storm infrastructure within these areas consist of public culvert pipes for roadway crossings and consideration for future public culvert pipes for future driveways for each lot. Culvert calculations and graphics are provided within the Appendix of this report to demonstrate culvert capacities and show any roadway/driveway overtopping as a result of peak flows. The culverts are designed to have full capacity of the minor (5-year) storm event and a maximum of 4" of roadway or driveway pooling during the major (100-year) storm event.

V. Environmental Evaluations

a. Significant Existing or Potential Wetland and Riparian Areas Impacts

As part of this work, the developer has engaged Bristlecone Ecology, LLC to perform environmental studies of the site that will be submitted with the planning documents. Major information in the report concerning wetlands concludes that there is a wetland associated with Black Squirrel Creek. Black Squirrel Creek is known to be a jurisdictional stream.

At this time, there are no improvements proposed for Black Squirrel Creek. The minimal impact to the stream will keep the natural habitat intact and the natural function of the Creek as it is to maintain the wetland habitat.

c. Stormwater Quality Considerations and Proposed Practices

As part of the development, full spectrum detention facilities will be installed to provide water quality for the development. The facilities are designed using El Paso County criteria and provide stormwater quality by slowing the release of stormwater captured by the ponds and allowing solids to settle out. Additionally, when possible, the existing natural drainage ways will be used to convey stormwater to more closely mimic the natural hydrologic and hydraulic cycle. Some of the drainage ways will be used to convey stormwater to more additional water to the ponds and others will receive water from the ponds and in both scenarios will provide additional water quality benefits.

On site practices for the estate homes includes direct discharge of roof and hardscape runoff to the surrounding landscaped areas. This would include discharge of the gutters onto landscape areas vs. directly connecting to storm sewer and as discussed above as well using natural ditches and swales where it is logical and makes sense to convey stormwater in lieu of storm sewer piping.

Areas in which stormwater runoff is directed offsite without detention being provided have grass buffers that provide 100 percent water quality runoff reduction due to the small percent imperviousness compared to their respective buffer areas that consist of pervious open landscaped areas. Runoff reduction calculations can be found in the appendix of this report.

d. Permitting Requirements



When work infringes upon the wetlands or floodplain a 404 Permit will be required. If the work within the waterways is minimal, it will likely be covered under a nationwide 404 permit; it is however possible that an individual permits will be required.

The Colorado Department of Public Health and Environment will require permits for any disturbance that exceeds 1 acre of land. Should groundwater be encountered, a dewatering permit will also be required.

El Paso County will require an Erosion and Stormwater Quality Control Permit and any other construction permits required to complete the construction of the site.

Should development occur which affects the floodplain, FEMA will require a permit for work withing the floodplain prior to the commencement of any construction or development within any special flood hazard area (SFHA). If the infrastructure is to be installed within the channel the designer shall route the design through the proper FEMA on Part IV of the PBMP boxes B, D, and E are all checked. See comments on the PBMP form. It needs to be clearly discussed in the text here which does not propose any standards apply. TSS removal must be demonstrated (the MHFD

discharge into the existing spreadsheet alone does not satisfy this. For E, Regional WQCV Facility e. 4-Step Process In accordance with the Er calculations only A, WQCV should be checked because the three ponds four-step process to minir satisfy treatment requirements and it appears the 2.5 ac lot areas that don't runoff volumes, stabilizing drain to the ponds are excluded under I.7.1.B.5. Verify all this is true and need for Industrial Comme

provide permanent treatment.

Step 1 – Reducing Runoff Volumes: The majority of the development of the project site includes the land use categories of 2.5-acre single-family residential and lawn (golf course area). Both land uses have relatively minor imperviousness and runoff coefficients. The developed areas for the homes as designated by pad areas on the plans are disbursed with open land areas of vegetation and trees between which provide **THE DEMO ADD ICAPU ITY FORM**

THE PBMP APPLICABILITY FORM

Step 2 – Stabilize Drain capacity, velocity, and provides water quality Vegetation and/or matti flows and decreasing a and sediment runoff. R typical section and are a

Step 3 – Provide WQCV: Runoff from this development is treated through capture and slow release of the WQCV via detention ponds that are designed per current El Paso County DCM V2 and the MHFD. Proposed ponds A and B as well as the existing pond in Filing No. 1, pond 8, all provide WQCV for their respective tributary basins. A map included in the appendix shows all basins that are tributary to each respective pond in which they are tributary to.

Step 4 – Consider the need for Industrial and Commercial BMP's: A site specific storm water quality and erosion control plan and narrative will be prepared with subsequent land use approvals prepared in

Note that while the areas that there are large lot single family homes that are covered under exclusion I.7.1.B.5 and as such do not need a permanent WQCV. You can still note that while not required it has been demonstrated that RR is provided. But it must be clearly identified that permanent water quality is not required for those large lots otherwise we would require the vegetated strips that provide RR to be treated like the ponds as permanent water quality features with a maintenance agreement, O&M, and to be within a tract or easement. Because, based on the maps, the area considered for RR is already excluded, just ackowledge that exclusion so it is clear that the RR is not based on treatment need, but good stormwater management practices.



4.2 pertaining to the covering and storage handline and spill containment and control shall be followed as necessary. This filing does not contain any commercial of industrial land uses.

VI. Drawings

Please refer to the appendices for the Vicinity Map, FEMA Floodplain Map, NRCS Soils Map, hydrology and hydraulic calculations, and drainage basin maps. Reference materials from previously approved reports are included in the appendix including the 2018 Classic Consulting FDR/PDR calculations and drainage maps.

VII. Drainage and Bridge Fees

The East Cherry Creek Basin does not currently have a Drainage Basin Fee. However, the following fees for the filing no. 1 platted area within the black Squirrel Creek Basin are due prior to platting:

The fees are calculated using the following impervious acreage method approved by El Paso county. The acreage for Flying Horse Filing No. 3 within the Black Squirrel Creek Basin is 151.9 acres. This total area is entirely made up of 2.5 acre lots which have an imperviousness of 11%. The acreage of imperviousness is calculated below:

2.5 ac. Lots (incl. roads and tracts)

151.9 Ac. 11% = 16.71 Impervious Ac.

The following calculations are based on the 2023 drainage **addressed** or the Black Squirrel Creek Drainage Basin:

Filing 3 Fee Totals (prior to reduction):

Bridge Fees

\$ 660.00 x 16.71 Ac. = <u>\$ 11,028.60</u>


Drainage Fees

\$ 10,478.00 x 16.71 Ac. = <u>\$ 175,087.38</u>

Revise to 1 pond as only 1 proposed pond is within Black Squirrel Creek

Per the ECM 3.10.4a, this development requests a reduction of drainage fees based on the one on-site full spectrum detention/SWQ facilities proposed within the Black Squirrel Creek Drainage Basin to be construction with Filing 3 rather than utilizing a reduction for low density lots. The following facilities within the Black Squirrel Creek basin meet the required six criteria as follows:

- 1. No downstream regional facility in place yet.
- 2. all three proposed facilities are less than 15 ac-ft. in volume.
- 3. the proposed on-site facilities are not part of a regional plan.
- 4. The proposed outlets are designed to release to full-spectrum criteria.
- 5. Proposed facilities are per county criteria and will gain county approval.

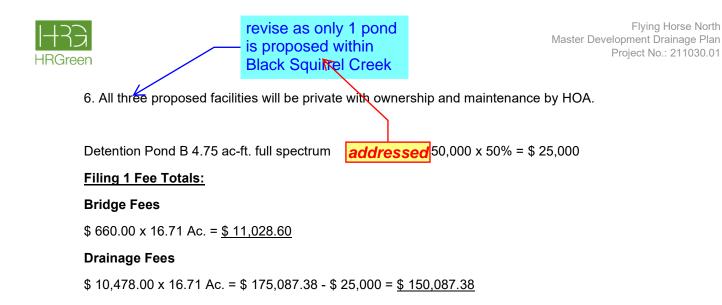

VIII.Summary

Flying Horse North Filing No. 3 is a 166.4 acre single-family residential estate lot development area that will contain paved roadways and roadside ditch sections. A portion of one of the road sections will serve a future development area intended for Flats that are to be built in a later filing. The future development area has been accounted for with assumed land use and imperviousness. Full spectrum detention facilities are proposed to provide water quality and detention to release the stormwater at or below historical rates. Existing detention facilities within the Filing No. 1 area are utilized per the 2018 Classic Consulting PDR/FDR and require no retrofitting.

The Filing No. 3 final design is assessed for stormwater capacity of roadway sections, roadside swales and the existing tertiary drainage ways to ensure that development of the 2.5-acre single-family residential estate lots and the future Flats areas will not be negatively impacted by drainage conditions, including existing and proposed altered areas for the roadway and lot construction phases.

All County and MHFD drainage design standards are met. It is anticipated that there will be no negative impacts to downstream and surrounding developments and facilities due to the development of Filing No. 3.



IX. References

El Paso County – Drainage Criteria Manual, 2014

City of Colorado Springs - Drainage Criteria Manual, May 2014

Urban Storm Drainage Criteria Manual, Urban Drainage Flood Control District, January 2018

Mile High Flood District Urban Storm Drainage Criteria Manual Volumes 1, 2, and 3; latest revisions

Mile High Flood District Software Resources and Tools (UD-Detention, UD-Inlet, UD-BMP)

United States Department of Agriculture National Resources Conservation Service Rock Chute Design Data Spreadsheet

Preliminary Drainage Report for Flying Horse North Preliminary Plan and Final Drainage Report for Flying Horse North Filing No. 1, Classic Consulting Engineers and Surveyors, November 2017

Flying Horse North Master Development Drainage Plan, HR Green Development, LLC., September 2022

Flying Horse North Irrigation Reservoir Embankment Design Report, Classic Consulting Engineers and Surveyors, latest revision June 2018, County approved on September 25, 2018

Black Squirrel Drainage Basin Planning Study (DBPS), URS Consultants, January 1989



Flying Horse North Filing No. 3 Final Drainage Report Project No.: 211030.20

El Paso County, Colorado


APPENDIX A

VICINITY MAP NRCS SOILS MAP FEMA FLOODPLAIN MAP EL PASO COUNTY MAJOR DRAINAGE BASINS MAP


VICINITY MAP

FLYING HORSE NORTH FILING NO. 3


A PORTION OF SECTION 36, TOWNSHIP 11 SOUTH, RANGE 66 WEST OF THE SIXTH PRINCIPAL MERIDIAN, COUNTY OF EL PASO, STATE OF COLORADO

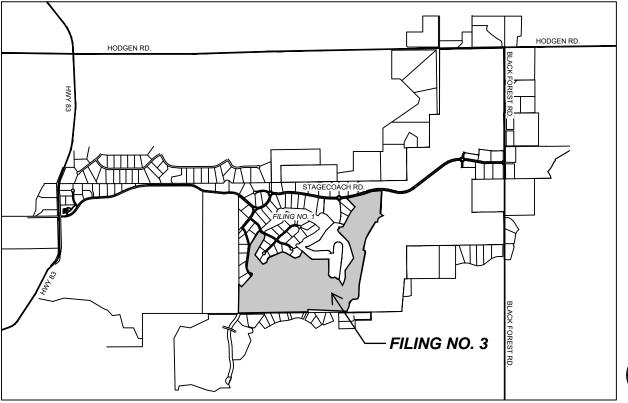

NOT TO SCALE

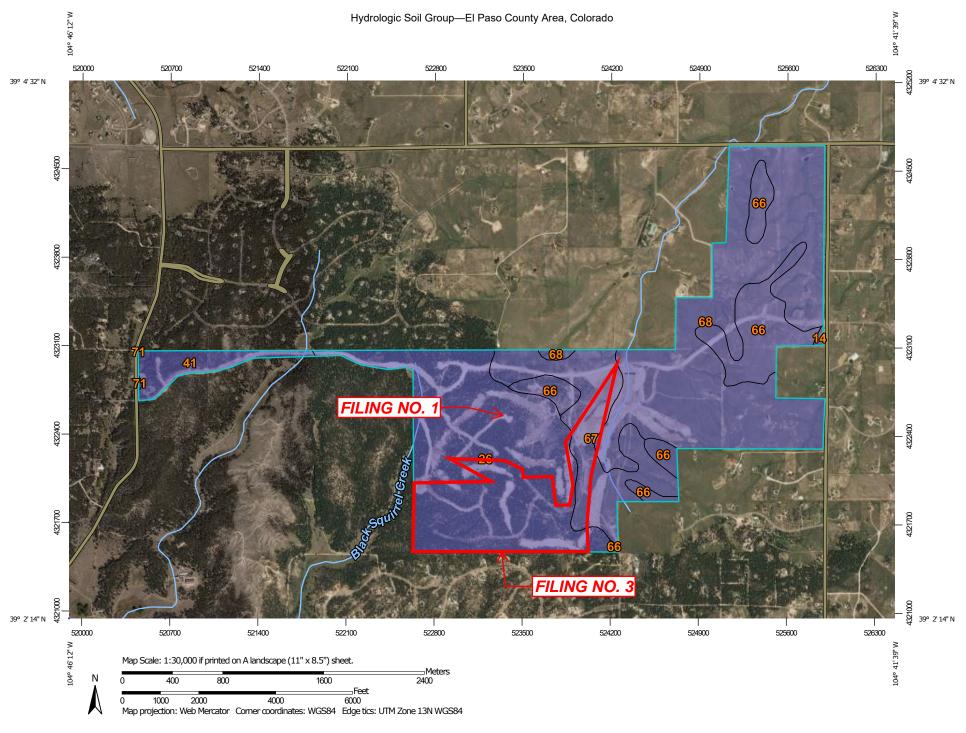


USDA Natural Resources Conservation Service Web Soil Survey National Cooperative Soil Survey 1/27/2022 Page 1 of 4

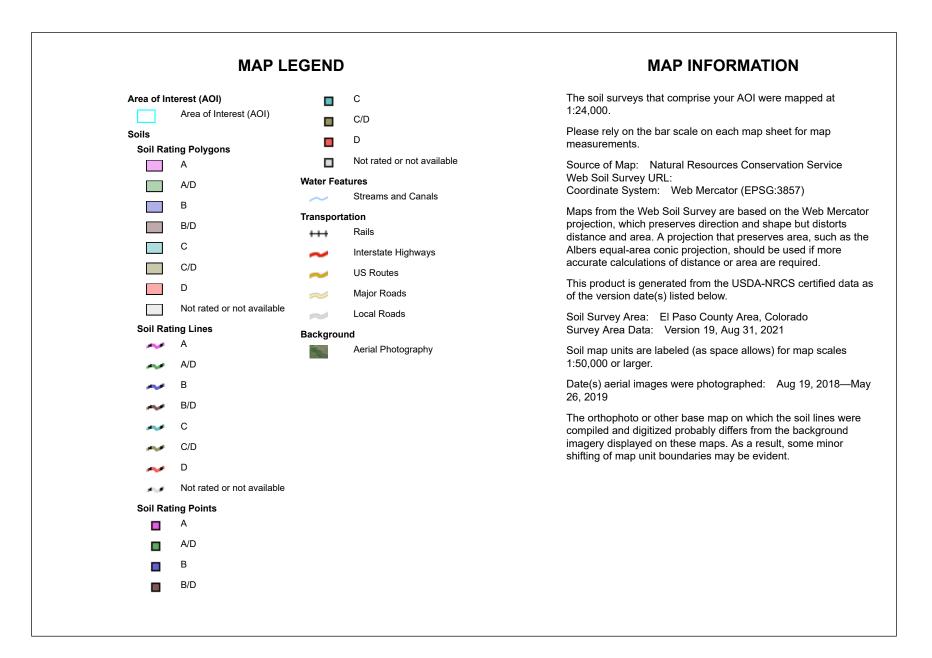

Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
14	Brussett loam, 1 to 3 percent slopes	В	1.9	0.1%
26	Elbeth sandy loam, 8 to 15 percent slopes	В	474.2	33.7%
41	Kettle gravelly loamy sand, 8 to 40 percent slopes	В	53.4	3.8%
66	Peyton sandy loam, 1 to 5 percent slopes	В	160.9	11.4%
67	Peyton sandy loam, 5 to 9 percent slopes	В	182.8	13.0%
68	Peyton-Pring complex, 3 to 8 percent slopes	В	533.4	37.9%
71	Pring coarse sandy loam, 3 to 8 percent slopes	В	0.6	0.0%
Totals for Area of Interest			1,407.3	100.0%

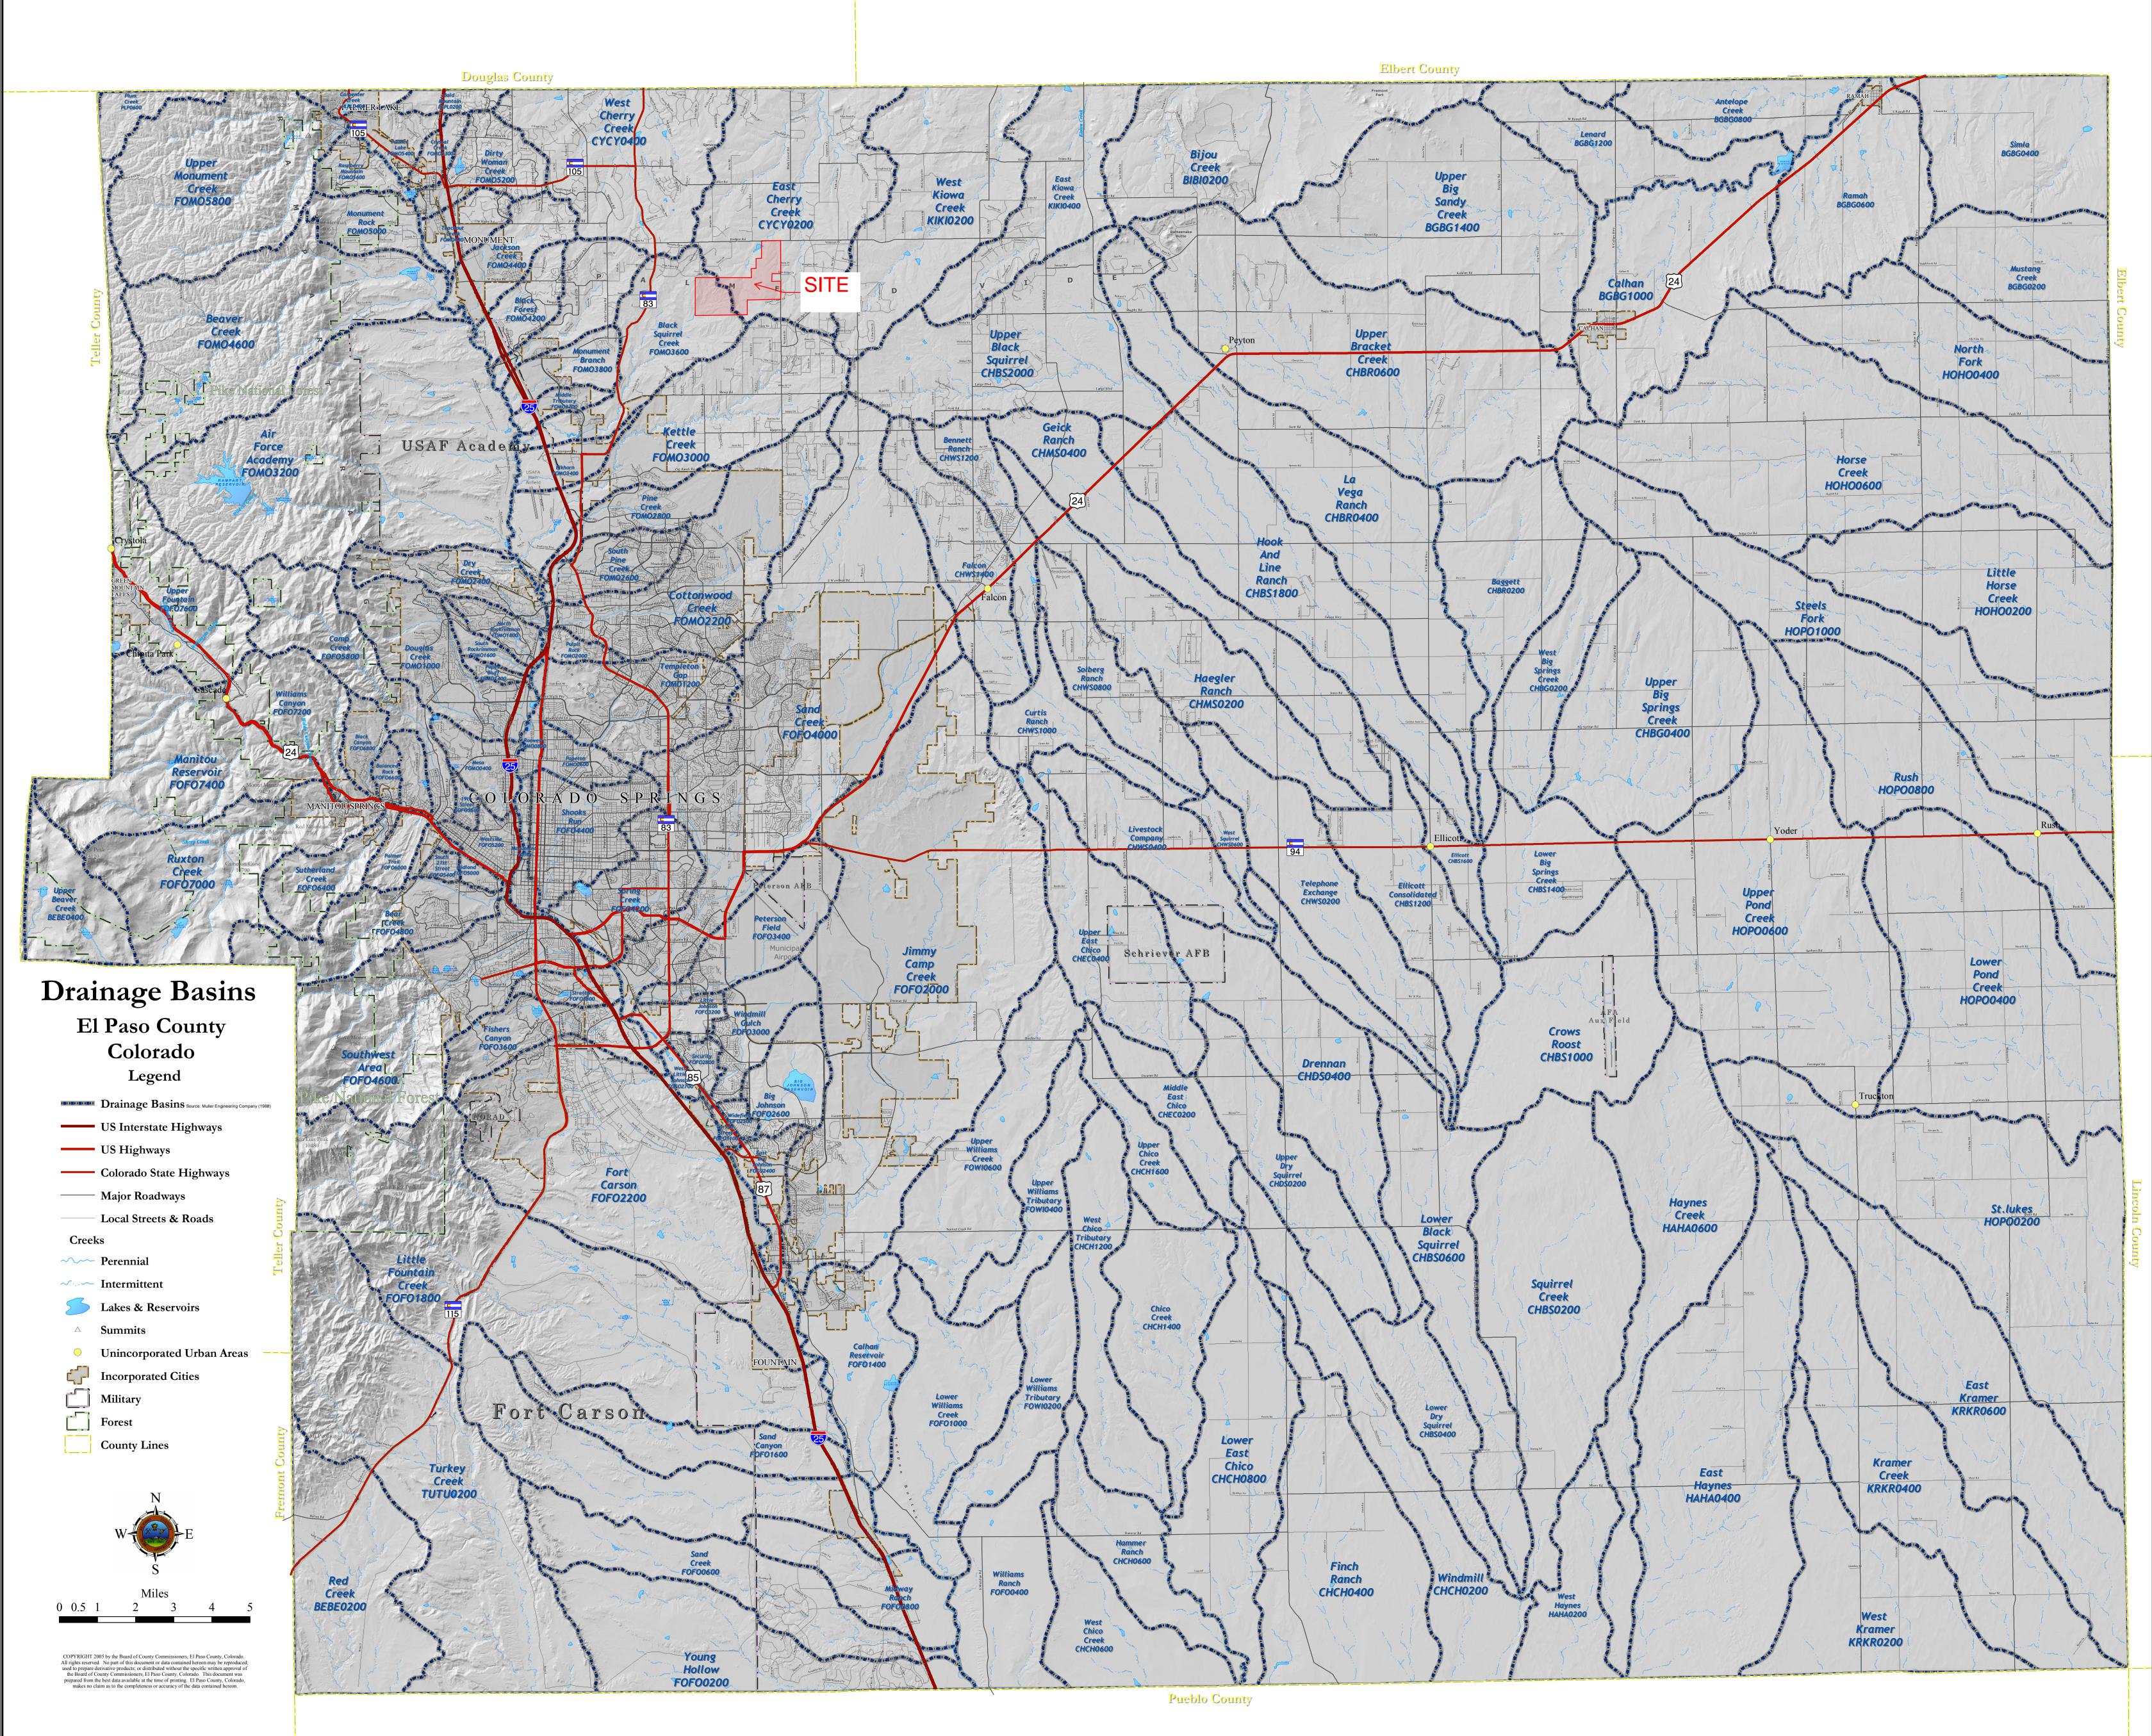

NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations** (BFEs) and/or floodways have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

Coastal Base Flood Elevations shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the floodways were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by flood control structures. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The projection used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The horizontal datum was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the North American Vertical Datum of 1988 (NAVD88). These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website a http://www.ngs.noaa.gov/ or contact the National Geodetic Survey at the following address:

NGS Information Services NOAA, N/NGS12

National Geodetic Survey SSMC-3, #9202 1315 East-West Highway

Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for bench marks shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at http://www.ngs.noaa.gov/.

Base Map information shown on this FIRM was provided in digital format by EI Paso County, Colorado Springs Utilities, City of Fountain, Bureau of Land Management, National Oceanic and Atmospheric Administration, United States Geological Survey, and Anderson Consulting Engineers, Inc. These data are current as of 2006.

This map reflects more detailed and up-to-date stream channel configurations and floodplain delineations than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

Corporate limits shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed Map Index for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.


Contact **FEMA Map Service Center** (MSC) via the FEMA Map Information eXchange (FMIX) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website a http://www.msc.fema.gov/.

If you have questions about this map or questions concerning the National Flood Insurance Program in general, please call 1-877-FEMA MAP (1-877-336-2627) or visit the FEMA website at http://www.fema.gov/business/nfip.

El Paso County Vertical Datum Offset Table **Vertical Datum** Flooding Source Offset (ft)

REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION


Panel Location Map

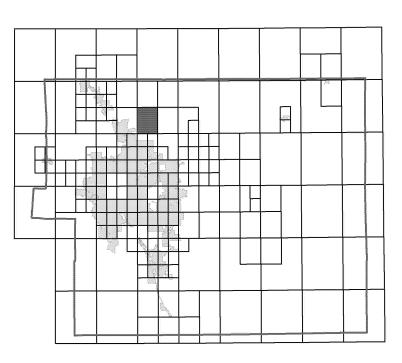

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).



Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

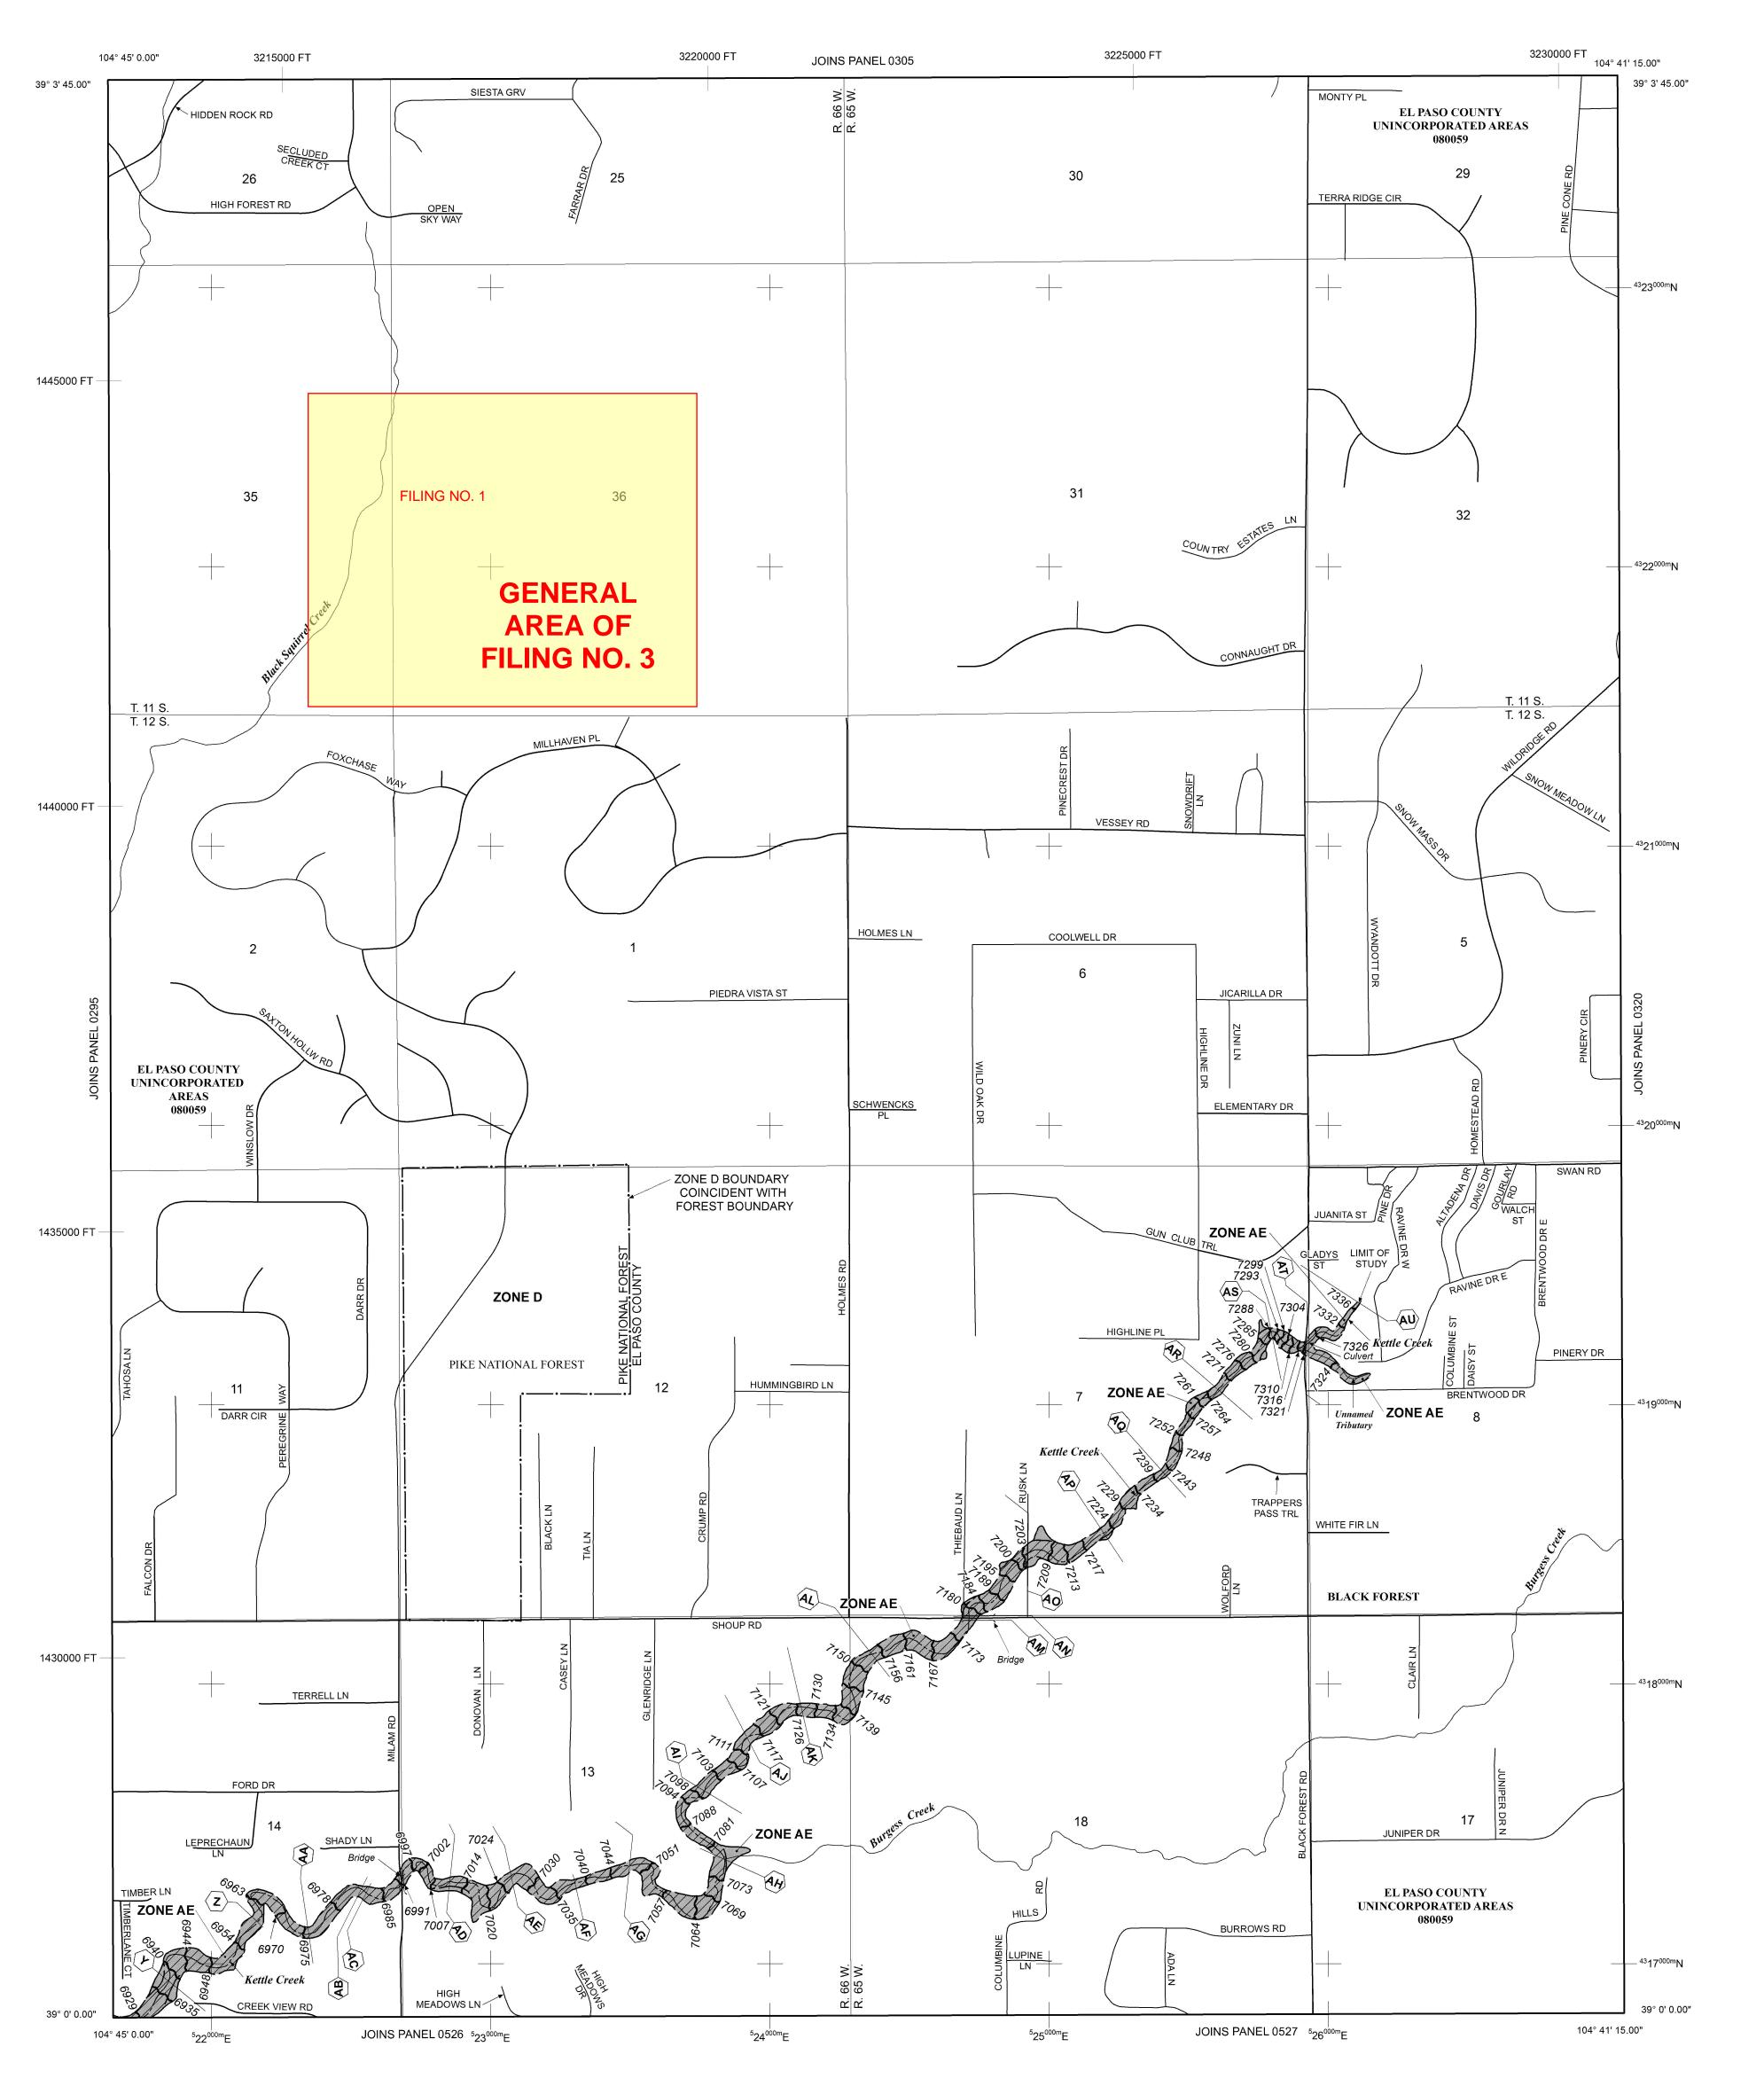

	SPECTAL FLOOD	LEGEND HAZARD AREAS (SFHAS) SUBJECT TO			
	INUNDATION BY	THE 1% ANNUAL CHANCE FLOOD			
that has a 19	6 chance of being equ	year flood), also known as the base flood, is the flood aled or exceeded in any given year. The Special Flood o flooding by the 1% annual chance flood. Areas of			
Special Flood	Hazard include Zones	A, AE, AH, AO, AR, A99, V, and VE. The Base Flood tion of the 1% annual chance flood.			
ZONE A ZONE AE	No Base Flood Elevations determined.				
ZONE AH	Base Flood Elevations determined. Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.				
ZONE AO	Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average				
	determined.				
ZONE AR	Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to				
ZONE A99	AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood. Area to be protected from 1% annual chance flood by a Federal flood				
LONE AU	•	under construction; no Base Flood Elevations			
ZONE V	Coastal flood zone Elevations determine	with velocity hazard (wave action); no Base Flood d.			
ZONE VE					
	FLOODWAY ARE	AS IN ZONE AE			
The floodway	is the channel of a si	tream plus any adjacent floodplain areas that must be			
	encroachment so that the 1% annual chance flood can be carried without ncreases in flood heights.				
	OTHER FLOOD AREAS				
ZONE X	Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1				
]	square mile; and areas protected by levees from 1% annual chance flood.				
	OTHER AREAS				
ZONE X ZONE D		be outside the 0.2% annual chance floodplain. hazards are undetermined, but possible.			
		ER RESOURCES SYSTEM (CBRS) AREAS			
		DTECTED AREAS (OPAs)			
CBRS areas a	,	located within or adjacent to Special Flood Hazard Areas. ain boundary			
		ay boundary			
		Boundary			
••••••		nd OPA boundary rv dividing Special Flood Hazard Areas of different Base			
	Flood E	ry dividing Special Flood Hazard Areas of different Base levations, flood depths or flood velocities.			
513 (EL 987	7) Base Flo	bod Elevation line and value; elevation in feet* bod Elevation value where uniform within zone;			
	elevatio	n in feet* Nertical Datum of 1988 (NAVD 88)			
		ection line			
(23)	(23) Transec				
97° 07' 30 32° 22' 30	Coogia,	phic coordinates referenced to the North American of 1983 (NAD 83)			
⁴² 75 ^{000m}	N 1000-m zone 13	eter Universal Transverse Mercator grid ticks,			
600000	FT 5000-fo	ot grid ticks: Colorado State Plane coordinate			
	system,	central zone (FIPSZONE 0502), t Conformal Conic Projection			
DX5510) Bench r	nark (see explanation in Notes to Users section of M panel)			
M1.	5				
• WEL.3	River M	ile			
	Refer to N	MAP REPOSITORIES Map Repositories list on Map Index			
	EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP				
		MARCH 17, 1997			
	BER 7, 2018 - to updat	TE(S) OF REVISION(S) TO THIS PANEL e corporate limits, to change Base Flood Elevations and update map format, to add roads and road names, and to			
opedari		eviously issued Letters of Map Revision.			
		prior to countywide mapping, refer to the Community of Insurance Study report for this jurisdiction.			
		available in this community, contact your insurance			
		urance Program at 1-800-638-6620.			
	м	AP SCALE 1" = 1000'			
	500 0 日日日	1000 2000			
-		METERS			
3	00 0	300 600			
(DANEL ANTES			
		PANEL 0315G			
		FIRM			
		FLOOD INSURANCE RATE MAP			
	X	EL PASO COUNTY,			
		COLORADO			
		AND INCORPORATED AREAS			
		PANEL 315 OF 1300			
		(SEE MAP INDEX FOR FIRM PANEL LAYOUT)			
		<u>CONTAINS:</u> <u>COMMUNITY NUMBER PANEL SUFFIX</u>			
		EL PASO COUNTY 080059 0315 G			
	R				
		Notice to User: The Map Number shown below should be used when placing map orders: the Community Number			
		shown above should be used on insurance applications for the subject community.			
		MAP NUMBER			
		08041C0315G			
		MAP REVISED			
		DECEMBER 7, 2018			
		Federal Emergency Management Agency			

National Flood Hazard Layer FIRMette

250

500

1,000

1.500



Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT Without Base Flood Elevation (BFE) Zone A. V. A9 With BFE or Depth Zone AE, AO, AH, VE, AR SPECIAL FLOOD HAZARD AREAS **Regulatory Floodway** 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X Future Conditions 1% Annual Chance Flood Hazard Zone X Area with Reduced Flood Risk due to Levee. See Notes. Zone X OTHER AREAS OF FLOOD HAZARD Area with Flood Risk due to Levee Zone D NO SCREEN Area of Minimal Flood Hazard Zone X Effective LOMRs OTHER AREAS Area of Undetermined Flood Hazard Zone D - — – – Channel, Culvert, or Storm Sewer GENERAL STRUCTURES LIIII Levee, Dike, or Floodwall 20.2 Cross Sections with 1% Annual Chance 17.5 Water Surface Elevation AREAOFMINIMAL FLOOD HAZARD **Coastal Transect** Mase Flood Elevation Line (BFE) Limit of Study **ELPASOCOUNTY** 11S R66W S036 Jurisdiction Boundary **Coastal Transect Baseline** 080059 OTHER **Profile Baseline** 41C0315G FEATURES Hydrographic Feature eff. 12/7/2018 **Digital Data Available** No Digital Data Available MAP PANELS Unmapped The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location. This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 8/2/2023 at 11:16 AM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time. This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers,

104°43'38"W 39°2'31"N

FIRM panel number, and FIRM effective date. Map images for

unmapped and unmodernized areas cannot be used for

regulatory purposes.

Basemap Imagery Source: USGS National Map 2023

Feet


2,000

1:6,000

National Flood Hazard Layer FIRMette



Legend

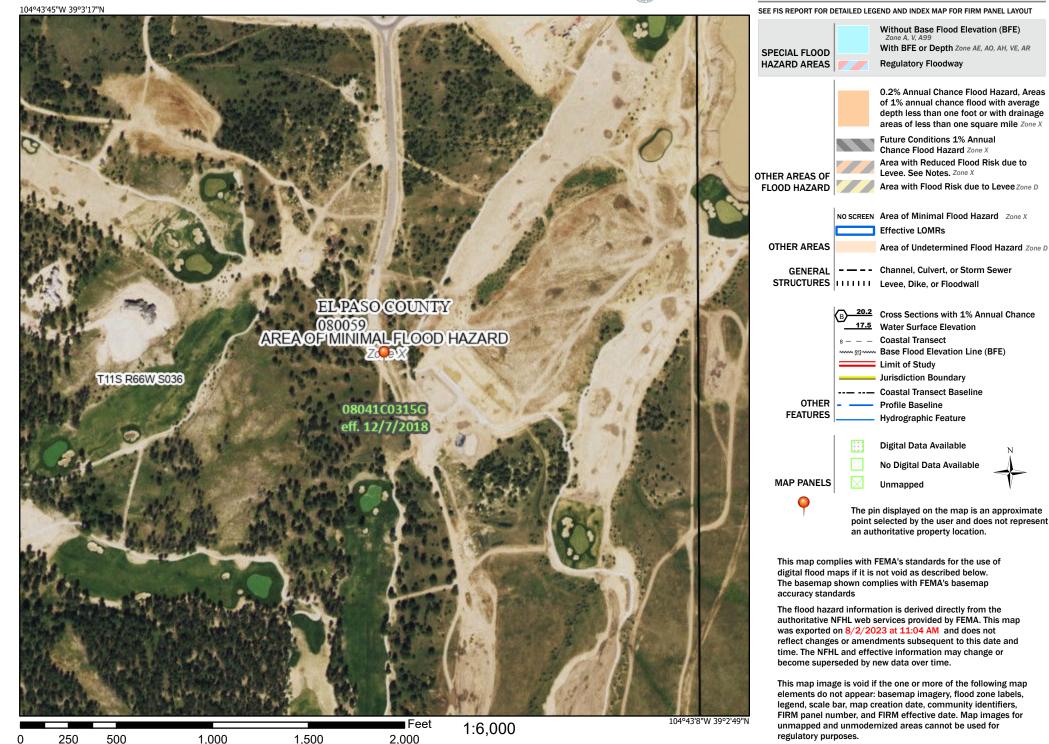

Basemap Imagery Source: USGS National Map 2023



Flying Horse North Filing No. 3 Final Drainage Report Project No.: 211030.20

El Paso County, Colorado

APPENDIX B

HYDROLOGY CALCULATIONS



Г

Flying Horse North Filing No. 3 PROPOSED CONDITIONS

HRGreen EL PASO COUNTY, COLORADO

Calc'd by: DLH Checked by: RDL Date: 3/4/2024

	SUM	IMARY	RUNO	FF TAE	BLE	
BASIN	AREA (ac)	% IMP.	C ₅	C ₁₀₀	Q_5 (cfs)	Q ₁₀₀ (cfs)
BS-18	33.90	7.77	0.14	0.39	12.6	60.1
BS-19	6.35	11.00	0.17	0.42	4.1	16.8
BS-20	23.79	6.83	0.13	0.39	9.6	48.5
BS-20.1	42.26	8.49	0.14	0.39	16.3	77.7
BS-20.2	4.32	11.00	0.17	0.42	2.5	10.1
BS-20.3	0.56	100.00	0.90	0.96	2.3	4.1
BS-21	0.77	100.00	0.90	0.96	3.0	5.4
BS-21.1	15.24	11.95	0.17	0.42	8.5	34.3
BS-21.2	0.18	100.00	0.90	0.96	0.8	1.5
BS-21.3	50.92	7.83	0.14	0.39	17.7	85.0
BS-22	0.24	100.00	0.90	0.96	1.1	2.0
BS-22.1	16.87	9.63	0.16	0.41	8.8	38.4
BS-23A	9.28	8.43	0.14	0.40	4.1	19.0
BS-23A.1	7.96	10.69	0.17	0.41	4.2	17.4
BS-23	37.06	7.26	0.13	0.39	15.6	76.7
BS-25	12.65	8.49	0.15	0.40	6.1	28.1
BS-26	4.90	3.74	0.10	0.36	1.7	10.6
BS-27	9.68	11.00	0.17	0.42	5.6	22.9
BS-28	24.03	11.00	0.17	0.42	12.3	50.6
BS-28.1	5.76	9.56	0.16	0.41	2.8	12.5
BS-28.2	19.47	8.75	0.15	0.40	9.0	41.0
BS-28.3	0.54	100.00	0.90	0.96	2.5	4.5
BS-29	22.93	7.78	0.14	0.39	8.3	39.7
BS-30	11.53	10.84	0.17	0.42	4.9	20.4
BS-31	8.40	4.57	0.11	0.37	3.2	18.6
BS-32	6.33	6.73	0.13	0.39	3.0	15.4
BS-33	8.91	10.39	0.16	0.41	5.2	21.9
CC-34	0.89	26.22	0.28	0.50	1.0	2.9
CC-34.1	15.09	5.82	0.12	0.38	6.7	36.1
CC-34.2	1.84	100.00	0.90	0.96	4.9	8.7
CC-34.3	1.01	40.81	0.40	0.59	1.6	3.9
CC-34.4	3.44	91.66	0.76	0.83	7.9	14.6
OS-1	2.70	29.55	0.29	0.51	2.8	8.2
OS-2	0.34	100.00	0.90	0.96	1.3	2.3
OS-17	15.80	11.00	0.17	0.42	9.9	40.6
OS-18	13.00	11.00	0.17	0.42	8.2	33.7

Г

	DESIGN PC	DINT SUMM	ARY TABL	E											
DESIGN POINT	CONTRIBUTING BASINS	ΣQ_5 (cfs)	ΣQ_{100} (cfs)	Tributary Area (ac.)	Weighted % Impervious										
1	OS-1 & CC-34.3	4.4	12.1	3.7	32.62%										
1.1	1 CC-34, DP1, DP1.2 1.2 7.5 8.0 57.17%														
1.2	CC-34.4 7.9 14.6 3.4 91.66%														
1.3	3 CC-34.2, OS-2 6.2 11.0 2.2 100.00%														
2	CC-34-34.4, OS-1-2 26.2 76.6 25.3 30.25%														
4	2 CC-34-34.4, OS-1-2 26.2 76.6 25.3 30.25%														
5	BS-20.2-20.3	4.7	14.2	4.9	21.21%										
6	BS-20-20.3, 21.1-21.3	57.7	261.3	137.3	8.92%										
7	BS-19, BS-22-22.1, DP6	71.7	318.4	160.7	9.21%										
8	BS-18, 23, DP7	99.8	455.3	231.7	8.69%										
9	BS-23A.1	4.2	17.4	8.0	7.96%										
10	BS-23A, DP8, DP9	108.1	491.7	248.9	8.74%										
11	BS-21	3.0	5.4	0.8	100.00%										
12	BS-28.1, DP11	5.9	17.9	6.5	20.23%										
13	BS-28.2	9.0	41.0	19.5	8.75%										
14	BS-28, BS-28.3, DP12, DP13	29.7	114.0	50.6	12.28%										
15	OS-18, BS-29-30	21.4	93.8	47.5	9.41%										
16	OS-17, BS-27, DP15	36.9	157.3	72.9	9.96%										
17	BS-26, DP14, DP16	68.2	281.8	128.4	10.04%										
18	BS-31	3.2	18.6	8.4	4.57%										
19	BS-32	3.0	15.4	6.3	6.73%										
20	BS-33	5.2	21.9	8.9	10.39%										
21	BS-25	6.1	28.1	12.7	8.49%										

	Flying Horse	e North F	iling No. 3												<u>Calc'd by:</u>			I	DLH	
	PROPOSED	CONDITI	ONS												Checked by:			I	RDL	
HRGreen	EL PASO COUNT	Y, COLORAD	0												Date:			3/4	/2024	
					СОМ	POSITE 'C	;' F/	ACT	ORS	;										
BASIN	GOLF COURSE / UNDEVELOPED	ROADWAY	RESIDENTIAL (2.5AC LOT)	ROOFTOP	TOTAL	SOIL TYPE		GOL		ROAD	NAY		SIDEN 5AC L		ROOFT	ОР			OMPOSIT VIOUSNE	
DASIN	ONDEVELOPED	<u> </u>	ACRES				%1		C ₁₀₀	%I C5	C ₁₀₀	%I		C ₁₀₀ *	%I	C ₅	C ₁₀₀	%I	C ₅	C ₁₀₀
BS-18	12.15	0.00	21.75	0.00	33.90	В	2	0.08	0.35		0.96	11	0.17	0.42	90		0.81	7.8	0.14	0.39
BS-19	0.00	0.00	6.35	0.00	6.35	В	2	0.08	0.35			11	0.17	0.42	90	0.73		11.0	0.17	0.42
BS-20	11.02	0.00	12.77	0.00	23.79	В	2	0.08	0.35	100 0.90	0.96	11	0.17	0.42	90	0.73		6.8	0.13	0.39
BS-20.1	23.35	0.20	17.62	1.09	42.26	В	2	0.08	0.35	100 0.90	0.96	11	0.17	0.42	90	0.73	0.81	8.5	0.14	0.39
BS-20.2	0.00	0.00	4.32	0.00	4.32	В		0.08	0.35			11	0.17	0.42	90	0.73		11.0	0.17	0.42
BS-20.3	0.00	0.56	0.00	0.00	0.56	В		0.08	0.35			11	0.17	0.42	90	0.73		100.0	0.90	0.96
BS-21	0.00	0.77	0.00	0.00	0.77	В		0.08	0.35			11	0.17	0.42	90	0.73		100.0	0.90	0.96
BS-21.1	1.56	0.05	13.33	0.30	15.24	В		0.08	0.35			11	0.17	0.42	90	0.73		11.9	0.17	0.42
BS-21.2	0.00	0.18	0.00	0.00	0.18	В						11	0.17	0.42	90		0.81	100.0	0.90	0.96
BS-21.3	21.87	0.40	28.65	0.00	50.92	В		0.08	0.35		0.96	11	0.17	0.42	90	0.73		7.8	0.14	0.39
BS-22	0.00	0.24	0.00	0.00	0.24	В	_	0.08	0.35			11	0.17	0.42	90	0.73		100.0	0.90	0.96
BS-22.1	2.56	0.00	14.31	0.00	16.87	В		0.08	0.35			11	0.17	0.42	90	0.73		9.6	0.16	0.41
BS-23A	2.65	0.00	6.63	0.00	9.28	В		0.08	0.35			11	0.17	0.42	90	0.73		8.4	0.14	0.40
BS-23A.1	0.27	0.00	7.69	0.00	7.96	В		0.08	0.35			11	0.17	0.42	90	0.73		10.7	0.17	0.41
BS-23	15.38	0.00	21.68	0.00	37.06	В		0.08	0.35			11	0.17	0.42	90	0.73		7.3	0.13	0.39
BS-25	3.53	0.00	9.12	0.00	12.65	В	_	0.08	0.35			11	0.17	0.42	90		0.81	8.5	0.15	0.40
BS-26	3.95	0.00	0.95	0.00	4.90	В		0.08	0.35			11	0.17	0.42	90	0.73		3.7	0.10	0.36
BS-27 BS-28	0.00	0.00	9.68 24.03	0.00	9.68 24.03	B		0.08	0.35			11 11	0.17	0.42	90 90	0.73		11.0 11.0	0.17	0.42
BS-28 BS-28.1	0.00	0.00	24.03 4.84		24.03	B	_	0.08				11	0.17		90	0.73		9.6	0.17	0.42
BS-28.2	4.87	0.00	4.64	0.00	19.47	B	_	0.08	0.35		0.96	11	0.17	0.42	90	0.73		9.6	0.16	0.41
BS-28.3	0.00	0.54	0.00	0.00	0.54	B	_	0.08	0.35			11	0.17	0.42	90	0.73		100.0	0.15	0.40
BS-29	8.20	0.00	14.73	0.00	22.93	B	_	0.08	0.35			11	0.17	0.42	90	0.73		7.8	0.90	0.30
BS-30	0.20	0.00	11.33	0.00	11.53	B		0.08	0.35			11	0.17	0.42	90	0.73		10.8	0.14	0.39
BS-31	6.00	0.00	2.40	0.00	8.40	B	_	0.08	0.35			11	0.17	0.42	90	0.73		4.6	0.17	0.37
BS-31 BS-32	3.00	0.00	3.33	0.00	6.33	B	_	0.08	0.35			11	0.17	0.42	90	0.73		6.7	0.11	0.39
BS-33	0.60	0.00	8.31	0.00	8.91	B		0.08	0.35			11	0.17	0.42	90	0.73		10.4	0.16	0.41
CC-34	0.67	0.22	0.00	0.00	0.89	B		0.08	0.35			11	0.17	0.42	90	0.73		26.2	0.28	0.50
CC-34.1	8.68	0.00	6.41	0.00	15.09	B		0.08	0.35			11	0.17	0.42	90	0.73		5.8	0.12	0.38
CC-34.2	0.00	1.84	0.00	0.00	1.84	B	_	0.08	0.35			11	0.17	0.42	90	0.73		100.0	0.90	0.96
CC-34.3	0.61	0.40	0.00	0.00	1.01	В		0.08	0.35			11	0.17	0.42	90	0.73		40.8	0.40	0.59
CC-34.4	0.00	0.57	0.00	2.87	3.44	B	_	0.08	0.35		0.96	11	0.17	0.42	90	0.73		91.7	0.76	0.83
OS-1	1.89	0.32	0.00	0.49	2.70	В	2	0.08	0.35	100 0.90	0.96	11	0.17	0.42	90	0.73	0.81	29.6	0.29	0.51
OS-2	0.00	0.34	0.00	0.00	0.34	В	2	0.08	0.35	100 0.90	0.96	11	0.17	0.42	90	0.73	0.81	100.0	0.90	0.96
OS-17	0.00	0.00	15.80	0.00	15.80	В		0.08	0.35			11	0.17	0.42	90	0.73		11.0	0.17	0.42
OS-18	0.00	0.00	13.00	0.00	13.00	В	2	0.08	0.35	100 0.90	0.96	11	0.17	0.42	90	0.73	0.81	11.0	0.17	0.42
TOTAL ONSITE	132.04	5.97	264.82	4.26	407.10													10.21%	0.16	0.41
TOTAL OFFSITE	E 1.89	0.66	28.80	0.49	31.84													13.52%	0.19	0.43
GRAND TOTAL	133.93	6.63	293.62	4.75	438.94													10.45%	0.16	0.41



Flying Horse North Filing No. 3

		OSED C	ONDITI	ONS						Check	ed by:	RDL	
HRGreen	EL PAS	о соинт	Y, COLOR	ADO						Date:		3/4/2024	
					TIME	OF CON	CENTRAT	ION					
BAS	SIN DATA		OVER		E (T _i)		TRAV	EL TIME (T_t		TOTAL	tc=(L/180)+10	Design tc
DESIGNATION	C ₅	AREA (ac)	LENGTH (ft)	SLOPE %	t _i (min)	C _V	LENGTH (ft)	SLOPE %	V (ft/s)	t _t (min)	t _c (min)	tc max	tc design (min)
BS-18	0.14	33.90	300	3.0	21.2	10	2600	3.00	1.7	25.0	46.2	26.1	26.1
BS-19	0.17	6.35	300	3.0	20.5	10	180	6.00	2.4	1.2	21.7	12.7	12.7
BS-20	0.13	23.79	260	7.0	15.0	10	1400	8.00	2.8	8.2	23.3	19.2	19.2
BS-20.1	0.14	42.26	300	7.0	16.0	10	2300	10.00	3.2	12.1	28.1	24.4	24.4
BS-20.2	0.17	4.32	300	5.4	16.8	10	950	5.00	2.2	7.1	23.9	16.9	16.9
BS-20.3	0.90	0.56	16	2.0	1.2	10	860	5.00	2.2	6.4	7.6	14.9	7.6
BS-21	0.90	0.77	16	2.0	1.2	10	1000	5.00	2.2	7.5	8.6	15.6	8.6
BS-21.1	0.17	15.24	300	7.0	15.4	10	1250	8.00	2.8	7.4	22.7	18.6	18.6
BS-21.2	0.90	0.18	16	2.0	1.2	10	260	5.00	2.2	1.9	5.0	11.5	5.0
BS-21.3	0.14	50.92	300	7.0	16.0	10	3110	7.00	2.6	19.6	35.6	28.9	28.9
BS-22	0.90	0.24	16	2.0	1.2	10	310	2.20	1.5	3.5	5.0	11.8	5.0
BS-22.1	0.16	16.87	300	4.5	18.1	10	970	6.00	2.4	6.6	24.7	17.1	17.1
BS-23A	0.14	9.28	250	10.0	12.9	10	1600	6.00	2.4	10.9	23.7	20.3	20.3
BS-23A.1	0.17	7.96	180	10.0	10.7	10	1483	6.00	2.4	10.1	20.7	19.2	19.2
BS-23	0.13	37.06	300	7.0	16.1	10	1320	6.00	2.4	9.0	25.0	19.0	19.0
BS-25	0.15	12.65	280	11.0	13.2	10	1000	10.00	3.2	5.3	18.4	17.1	17.1
BS-26	0.10	4.90	150	20.0	8.3	10	700	2.00	1.4	8.2	16.5	14.7	14.7
BS-27	0.17	9.68	170	10.0	10.3	10	1000	5.00	2.2	7.5	17.8	16.5	16.5
BS-28	0.17	24.03	200	8.0	12.1	10	1800	6.00	2.4	12.2	24.3	21.1	21.1
BS-28.1	0.16	5.76	200	7.0	12.8	10	1400	6.00	2.4	9.5	22.3	18.9	18.9
BS-28.2	0.15	19.47	300	6.0	16.6	10	1400	6.00	2.4	9.5	26.2	19.4	19.4
BS-28.3	0.90	0.54	16	2.0	1.2	10 10	370	4.00	2.0	3.1	5.0	12.1	5.0
BS-29 BS-30	0.14	22.93	300 300	10.0	14.2 14.8	10	2800 3100	5.00 5.00	2.2 2.2	20.9 23.1	35.1 37.9	27.2 28.9	27.2 28.9
BS-30 BS-31	0.17	11.53	180	8.0 10.0	14.8	10	640	5.00 8.00	2.2	3.8	15.1		
BS-31 BS-32	0.11	8.40 6.33	180	10.0	11.4	10	640 320	8.00 6.00	2.8	3.8	15.1	14.6 12.8	14.6 12.8
BS-32 BS-33	0.13	6.33 8.91	300	11.0	10.8	10	320 550	6.00	2.4	3.7	12.9	12.8	12.8
CC-34	0.16	0.89	100	2.0	13.8	10	300	1.00	2.4	5.0	17.5	14.7	14.7
CC-34.1	0.20	15.09	100	2.0	11.9	10	400	1.00	1.0	6.7	21.0	12.2	12.2
CC-34.1 CC-34.2	0.12	15.09	100	2.0	14.3	10	2150	1.00	1.0	35.8	37.0	22.0	22.0
CC-34.2 CC-34.3	0.90	1.04	16	2.0	4.0	10	480	1.00	1.0	8.0	12.0	12.8	12.0
CC-34.4	0.40	3.44	100	2.0	4.0 5.0	10	1839	1.00	1.0	30.7	35.6	20.8	20.8
OS-1	0.70	2.70	300	3.0	17.7	10	500	1.00	1.0	8.3	26.1	14.4	14.4
OS-2	0.29	0.34	16	2.0	1.2	10	500	1.00	1.0	8.3	9.5	12.9	9.5
OS-17	0.30	15.80	300	6.7	15.7	10	350	6.00	2.4	2.4	18.0	13.6	13.6
OS-18	0.17	13.00	300	6.0	16.2	10	300	6.00	2.4	2.4	18.3	13.3	13.3
0010	0.17	10.00	000	0.0	10.2	10	000	0.00	2.7	2.0	10.0	10.0	10.0
							I						

Calc'd by:

DLH

1								Flyin	g Ho	rse l	Nort	h Fi	ling	No. 3	;						Calc	'd by:	DLH
	$+\prec$							Ρ	ROPC	DSED) CO	NDI	TION	IS							Chec	ked by:	RDL
									DESIG	SN ST	ORN	l: 5-`	YEAR	l							Da	ite:	3/4/2024
HR	Gre	en																2	.6894	5859	5		
				6	DIRECT	RUNG	DFF		то	TAL R	UNO	FF	ov	ERLAN	ID		PI	PE			RAVEL	TIME	REMARKS
STREET	DESIGN POINT	BASIN ID	AREA (ac)	C5	t _e (min)	C ₅ *A (ac)	/ (in./ hr.)	Q (cfs)	ť _c (min)	C ₅ *A (ac)	/ (in./ hr.)	Q (cfs)	Q _{street} (cfs)	C ₅ *A (ac)	SLOPE %	Q _{PIPE} (cfs)	C ₅ *A (ac)	SLOPE %	PIPE SIZE (FT)	LENGTH (FT)	VEL. (FPS)	TRAVEL TIME (min	
		BS-18	33.90	0.14	26.1	4.67	2.69	12.6															BS-18 FLOW TO DP8 VIA PROP. PERMANENT TRM CHANNEL IN FILING 1
	_	BS-19	6.35	0.17	12.7	1.08	3.77	4.1					0.0	0.00						000	10	0.00	BS-19 FLOW TO DP7 VIA PROP. PERMANENT TRM CHANNEL IN FILING 1
	_	BS-20	23.79	0.13	19.2	3.06	3.15	9.6		3.06		9.6	9.6	3.06	6.0					900	4.9	3.06	BS-20 TO COLLECTION INTO DET. POND AT DP3
		BS-20.1	42.26	0.14	24.4	5.84	2.79	16.3															BS-20.1 TO COLLECT AT DP6 W/ BS-20.2, BS-20.3
		BS-20.2	4.32	0.17	16.9	0.74	3.34	2.5		0.74		2.5											FLOW TO DP5
	_	BS-20.3	0.56	0.90	7.6	0.50	4.55	2.3					4.7	1.24	8.0					330	5.7	0.97	FLOW TO DP5
	5							_		1.24		4.7	30.7	10.14						520	4.9	1.77	DP5 TO OVERLAND FLOW TO DP6
	С	1								10.14		30.7	3.0	0.69						1400	4.9	4.76	SECTION C TO INCLUDE FLOW FROM DP5 & BS-20-20.1
	11	BS-21	0.77	0.90	8.6	0.69	4.35	3.0		0.69		3.0	8.5	2.66						1450	4.7	5.11	BS-21 TO COLLECT AT CULVERT AT DP11
	4	BS-21.1	15.24	0.17	18.6	2.66	3.20	8.5		2.66		8.5	0.8	0.16						1450	4.7	5.11	BS-21.1 TO COLLECT AT CULVERT AT DP4, FLOW TO DP6 POND
	_	BS-21.2	0.18	0.90	5.0	0.16	5.17	0.8															BS-21.2 COMBINES W/ BS-21.1, FLOW TO DP6 POND
	_	BS-21.3	50.92	0.14	28.9	6.99	2.53	17.7					57.7	19.95	28.0					60	10.6	0.09	BS-21.3 COLLECTS AT DP6 POND DP6 TO COLLECT SECTION C & BS-21.1-21.3, POND SIZED BY CLASSIC TO CAPTURE 215 CFS
	6									19.95		57.7	1.1	0.22	6.0					662	4.9	2.25	
		BS-22	0.24	0.90	5.0	0.22	5.17	1.1															BS-22 TO FLOW TO DP7
		BS-22.1	16.87	0.16	17.1	2.64	3.33	8.8					71.7	23.88	3.5					1030	3.7	4.59	BS-22.1 FLOW TO DP7
	7									23.88		71.7											DP7 COLLECTS BS-22-22.1, & DP6, FLOW TO DP8 VIA PERM. TRM CHANNEL W/ ROCK CHECK DAMS
		BS-23A	9.28	0.14	20.3	1.34	3.07	4.1															BS-23A TO FLOW TO DP10 POND VIA ROADSIDE DITCH
	9	BS-23A.1	7.96	0.17	19.2	1.33	3.15	4.2		1.33		4.2				4.2	1.33	2.0	2.0	160	#DIV/0!	#DIV/0!	BS-23A.1 FLOW TO CULVERT AT DP9
		BS-23	37.06	0.13	19.0	4.92	3.17	15.6															BS-23 FLOW TO CULVERT AT DP8
	8									28.80		99.8				99.8	28.80	2.0	5.0	270	#DIV/0!	#DIV/0!	DP8 COLLECTS BS-18 & BS-23 & DP7, FLOWS TO CULVERT OUTLET AT DP10 DET POND DP10 COLLECTS BS-23A, DP8 & DP9 AT POND SIZED BY CLASSIC HOMES
	10									31.48		108.1											
	21	BS-25	12.65	0.15	17.1	1.83	3.32	6.1		1.83		6.1						-					BS-25 TO FLOW OFFSITE
	-	BS-26	4.90	0.10	14.7	0.48	3.55	1.7					15.4	4.34	20.0					130	8.9	0.24	BS-26 CONTAINS POND AT DP17, TO COLLECT DP14 & DP16
		BS-27	9.68	0.17	16.5	1.65	3.38	5.6		4.34		15.4	0.0		20.0					150	8.9	0.28	BS-27 INCLUDES OS-17 AND COLLECTS AT DP16
		BS-28	24.03	0.17	21.1	4.09	3.01	12.3					5.9	1.59					<u> </u>	1640	4.7	5.78	BS-28 FLOWS INTO ROADSIDE DITCH AT DP14
	12	BS-28.1	5.76	0.16	18.9	0.90	3.18	2.8		1.59		5.9	2.0										BS-28.1 COMBINES W/ DP11 FLOWS TO CULVERT AT DP12

1	ר ו						I		g Ho												Cal	c'd by:	DLH
	┟┤╵	Ż							ROPC												Chec	ked by:	RDL
	Cro								DESIG	N ST	ORN	l: 5-1	(EAR								D	ate:	3/4/2024
пК	Gre	en																2	2.6894	15859	5		
		1		0	DIRECT	RUNC	FF		то	TAL R	UNO	F	ov	ERLAN	D		PI	PE	-	т	RAVEL		REMARKS
STREET	DESIGN POINT	BASIN ID	AREA (ac)	C5	t _e (min)	C ₅ *A (ac)	/ (in./ hr.)	Q (cfs)	t _e (min)	C ₅ *A (ac)	/ (in./ hr.)	Q (cfs)	Q _{street} (cfs)	C₅*A (ac)	SLOPE %	Q _{PIPE} (cfs)	C ₅ *A (ac)	SLOPE %	PIPE SIZE (FT)	LENGTH (FT)	VEL. (FPS)	TRAVEL TIME (min	
	13	BS-28.2	19.47	0.15	19.4	2.87	3.13	9.0		2.87		9.0	9.0	2.87	4.5					1700	4.2	6.68	BS-28.2 FLOWS TO CULVERT AT DP13
		BS-28.3	0.54		5.0	0.49	5.17	2.5					2.5	0.49	4.5					1620	4.2	6.36	BS-28.3 W/ DP13 AT NATURAL DRAINAGE WAY TO DP14
													16.5	5.38	4.0					900	4.0	3.75	
		BS-29	22.93		27.2	3.16	2.63	8.3		5.38		16.5	4.9	1.94	6.4					150	5.1	0.49	BS-29 INCLUDE OS-18 AND COLLECTS AT DP15
		BS-30	11.53	0.17	28.9	1.94	2.54	4.9			21.4 21.4 21.4 21.4 21.4 21.4 21.4 21.4												BS-30 COLLECTS IN ROADSIDE DITCH, FLOWS TO DP15
	15			7.32 21.4 9 100 11.0 36.9 11.66 30.0 100 11.0												0.15	DP15 COLLECTS BS-29, BS-30, OS-18						
	16					-				11.66		36.9	36.9 11.66 30.0 100 11 66.9 100 11 100 11										DP16 COLLECTS BS-27, OS-17, DP15
	14		11.66 36.9											9.04	30.0	150	11.0	0.23	DP14 COLLECTS BS-28, 28.1, 28.2, 28.3, BS-21				
	17		-			-				21.18		68.2											DP17 CONTAINS BS-21, 28, 28.1, 28.2, 28.3, 30, 29, 27 & OS-17-18 IN DET. POND
	18	BS-31	8.40	0.11	14.6	0.89	3.57	3.2		0.89		3.2											BS-31 TO FLOW OFFSITE SOUTH
	19	BS-32	6.33	0.13	12.8	0.81	3.76	3.0		0.81		3.0											BS-32 TO FLOW OFFSITE SOUT
	20	BS-33	8.91	0.16	14.7	1.46	3.55	5.2		1.46		5.2											BS-33 TO FLOW OFFSITE SOUTH
	1.1	CC-34	0.89	0.28	12.2	0.25	3.83	1.0		0.32		1.2				13.3	4.06	2.0	2.0	30	10.2	0.05	BS-34 & OVERFLOW FROM DP'S 1 & 1.2 CAPTURED AT 5' SUMP INLET
		CC-34.1	15.09	0.12	12.8	1.79	3.76	6.7															BASIN FLOW CAPTURED IN ROADSIDE DITCH, COLLECTED AT DP2 POND
	1.3	CC-34.2	1.84	0.90	22.0	1.66	2.94	4.9		1.96		6.2				19.5	6.03	5.5	5 3.0	95	22.1	0.07	BS-34.2 & OS-2 CAPTURED W/ 10' TYPE R SUMP INLET, PIPE FLOW FROM DP1.1 & DP1.3 CONVERGE
		CC-34.3	1.01	0.40	12.0	0.41	3.85	1.6															BS-34.3 TO FLOW DOWNSTREAM INTO ON-GRADE INLET AT DP1
	1.2	CC-34.4	3.44	0.76	20.8	2.61	3.03	7.9		2.61		7.9	0.2	0.07	1.0	7.7	2.54	1.1	1 2.0	185	7.6	0.41	BS-34.4 CAPTURED ON GRADE BY 15' CDOT TYPE R INLET
	2		-			-				7.81		26.2											FULL SPECTRUM DETENTION POND A TO BE DESIGNED AT DP2
		OS-1	2.70	0.29	14.4	0.80	3.58	2.8		0.80		2.8											OS-1 TO FLOW DOWNSTREAM INTO ON-GRADE INLET AT DP1
	1		-			-				1.21		4.4	0.0	0.00	4.0	4.4	1.21	2.0	0 1.5	5 305	8.4	0.60	BS-34.3 & OS-2 CAPTURED ON GRADE BY 15' CDOT TYPE R INLET
		OS-2	DS-2 0.34 0.90 9.5 0.31 4.21 1.3																		OS-2 FLOWS TO DP1.3		
		OS-17	15.80	0.17	13.6	2.69	3.67	9.9		2.69		9.9											OS-17 FLOWS INTO BS-27
		OS-18	13.00	0.17	13.3	2.21	3.70	8.2		2.21		8.2											OS-18 FLOWS INTO BS-29
			-			-																	



	Flying Horse North Filing No. 3	Calc'd by:	DLH
à	PROPOSED CONDITIONS	Checked by:	RDL
1	DESIGN STORM: 100-YEAR	Date:	3/4/2024
n			

				D	IRECT	RUNG	OFF				UNOFF	-	OV	ERLA	ND		PI	PE		TR	AVEL	TIME	REMARKS
STREET	DESIGN PONT	BASIN ID	AREA (ac)	C ₁₀₀	t _c (min)	C ₁₀₀ *A (ac)	/ (in./ hr.)	Q (cfs)	t _c (min)	C ₁₀₀ *A (ac)	/ (in./ hr.)	Q (cfs)	Q _{street} (cfs)	C ₁₀₀ *A (ac)	SLOPE %	Q _{PIPE} (cfs)	C ₁₀₀ *A (ac)	SLOPE %	PIPE SIZE (ft)	LENGTH (ft)	VEL. (ft/s)	TRAVEL TIME (min)	
		BS-18	33.90	0.39	26.1	13.32	4.51	60.1															BS-18 FLOW TO DP8 VIA PROP. PERMANENT TRM CHANNEL IN FILING 1
		BS-19	6.35	0.42	12.7	2.65	6.34	16.8															BS-19 FLOW TO DP7 VIA PROP. PERMANENT TRM CHANNEL IN FILING 1
		BS-20	23.79	0.39	19.2	9.18	5.29	48.5		9.18		48.5	48.5	9.18	6.0					900	4.9	3.06	BS-20 TO COLLECTION INTO DET. POND AT DP3
		BS-20.1	42.26	0.39	24.4	16.60	4.68																BS-20.1 TO COLLECT AT DP6 W/ BS-20.2, BS-20.3
		BS-20.2	4.32	0.42		1.80	5.60			1.80		10.1											FLOW TO DP5
		BS-20.2	0.56	0.96			7.63			1.00		10.1											FLOW TO DP5
	5	B3-20.3	0.50	0.90	7.0	0.54	7.03	4.1		2.24		14.0	14.2	2.34	8.0					330	5.7	0.97	DP5 TO OVERLAND FLOW TO DP6
										2.34		14.2	140.4	28.12	6.0					520	4.9	1.77	SECTION C TO INCLUDE FLOW FROM DP5 & BS-20-20.1
	С									28.12		140.4	5.4	0.74	6.0					1400	4.9	4.76	
	11	BS-21	0.77	0.96			7.31			0.74		5.4	34.3	6.40	5.6					1450	4.7	5.11	BS-21 TO COLLECT AT CULVERT AT DP11
	4	BS-21.1	15.24	0.42	18.6	6.40	5.37	34.3		6.40		34.3	1.5	0.17	5.6					1450	4.7	5.11	BS-21.1 TO COLLECT AT CULVERT AT DP4, FLOW TO DP6 POND
		BS-21.2	0.18	0.96	5.0	0.17	8.68	1.5															BS-21.2 COMBINES W/ BS-21.1, FLOW TO DP6 POND
		BS-21.3	50.92	0.39	28.9	19.99	4.25	85.0					261.3	54.68	28.0					60	10.6	0.09	BS-21.3 COLLECTS AT DP6 POND
	6									54.68		261.3	2.0	0.23	6.0					662	4.9	2.25	DP6 TO COLLECT SECTION C & BS-21.1-21.3, POND SIZED BY CLASSIC TO CAPTURE 215 CFS
		BS-22	0.24	0.96	5.0	0.23	8.68	2.0					2.0	0.23	0.0					002	4.5	2.25	BS-22 TO FLOW TO DP7
		BS-22.1	16.87	0.41	17.1	6.86	5.59	38.4					040.4	04.40	0.5					1000	0.7	4.50	BS-22.1 FLOW TO DP7
	7									64.43		318.4	318.4	64.43	3.5					1030	3.7	4.59	DP7 COLLECTS BS-22-22.1, & DP6, FLOW TO DP8 VIA PERM. TRM CHANNEL W/ ROCK CHECK DAMS
		BS-23A	9.28	0.40	20.3	3.69	5.15	19.0															BS-23A TO FLOW TO DP10 POND VIA ROADSIDE DITCH
	9	BS-23A.1	7.96	0.41	19.2	3.30	5.28	17.4		3.30		17.4				17.4	3.30	2.0	2.0	160	10.2	0.26	BS-23A.1 FLOW TO CULVERT AT DP9
		BS-23	37.06	0.39	19.0	14.43	5.32	76.7															BS-23 FLOW TO CULVERT AT DP8
	8									92.18		455.3				455.3	92.18	2.0	5.0	270	18.8	0.24	DP8 COLLECTS BS-18 & BS-23 & DP7, FLOWS TO CULVERT OUTLET AT DP10 DET POND
	10									99.17		491.7											DP10 COLLECTS BS-23A, DP8 & DP9 AT POND SIZED BY CLASSIC HOMES
	21	BS-25	12.65	0.40	17.1	5.04	5.58	28.1		5.04		28.1											BS-25 TO FLOW OFFSITE
		BS-26	4.90	0.36	14.7		5.96																BS-26 CONTAINS POND AT DP17, TO COLLECT DP14 & DP16
		BS-27	9.68	0.42			5.67			10.63		63.5	63.5	10.63	20.0					130	8.9	0.24	BS-27 INCLUDES OS-17 AND COLLECTS AT DP16
		BS-28	24.03	0.42		10.02	5.05					00.0	0.0	0.00	20.0					150	8.9	0.28	BS-28 FLOWS INTO ROADSIDE DITCH AT DP14
	12	BS-28.1	5.76	0.42	18.9	2.34	5.33			3.08		17.9	17.9	3.08	5.6					1640	4.7	5.78	BS-28.1 COMBINES W/ DP11 FLOWS TO CULVERT AT DP12
												41.0	41.0	7.79	4.5					1700	4.2	6.68	
	13	BS-28.2	19.47	0.40	19.4	7.79	5.26	41.0		7.79		41.0			I	1		I		1	1	1	BS-28.2 FLOWS TO CULVERT AT DP13

HRGreen

	Flying Horse North Filing No.	3			Calc'd by:	DLH
$\prec - \downarrow$	PROPOSED CONDITIONS				Checked by:	RDL
	DESIGN STORM: 100-YEAR				Date:	3/4/2024
reen						
	DIRECT RUNOFF	TOTAL RUNOFF	OVERLAND	PIPE	TRAVEL TIME	REMARKS

					DIRECT	RUNU	JFF			TOTAL R	UNUFF		01	ERLA			PI	PE		IR	AVEL		REMARKS
STREET	DESIGN PONT	BASIN ID	AREA (ac)	C ₁₀₀	<i>t_e (</i> min)	C ₁₀₀ *A (ac)	/ (in./ hr.)	Q (cfs)	t _e (min)	C ₁₀₀ *A (ac)	/ (in./ hr.)	Q (cfs)	Q _{street} (cfs)	C ₁₀₀ *A (ac)	% adone	Q _{PIPE} (cfs)	C ₁₀₀ *A (ac)	SLOPE %	PIPE SIZE (ft)	LENGTH (ft)	VEL. (ft/s)	TRAVEL TIME (min)	
			0.54		5.0	0.50							4.5	0.52	4.5					1620	4.2	6.36	
		BS-28.3	0.54	0.96	5.0	0.52	8.68	4.5					73.4	14.44	4.0					900	4.0	3.75	BS-28.3 W/ DP13 AT NATURAL DRAINAGE WAY TO DP14
		BS-29	22.93	0.39	27.2	9.01	4.41	39.7		14.44		73.4											BS-29 INCLUDE OS-18 AND COLLECTS AT DP15
		BS-30	11.53	0.42	28.9	4.80	4.26	20.4					20.4	4.80	6.4					150	5.1	0.49	BS-30 COLLECTS IN ROADSIDE DITCH, FLOWS TO DP15
		BS-30	11.55	0.42	20.9	4.60	4.20	20.4	·				93.8	19.23	4.0					900	4.0	3.75	BS-30 COLLECTS IN ROADSIDE DITCH, FLOWS TO DE 15
	15									19.23		93.8											DP15 COLLECTS BS-29, BS-30, OS-18
	16									29.86		157.3	157.3	29.86	30.0					100	11.0	0.15	DP16 COLLECTS BS-27, OS-17, DP15
	10									23.00		107.0	114.0	21.42	30.0					150	11.0	0.23	
	14									21.42		114.0											DP14 COLLECTS BS-28, 28.1, 28.2, 28.3, BS-21
	17									53.05		281.8											DP17 CONTAINS BS-21, 28, 28.1, 28.2, 28.3, 30, 29, 27 & OS-17-18 IN DET. POND
										00.00		201.0											
	18	BS-31	8.40	0.37	14.6	3.10	5.99	18.6	i	3.10		18.6											BS-31 TO FLOW OFFSITE SOUTH
	19	BS-32	6.33	0.39	12.8	2.44	6.31	15.4		2.44		15.4											BS-32 TO FLOW OFFSITE SOUT
	20	BS-33	8.91	0.41	14.7	3.68	5.96	21.9		3.68		21.9											BS-33 TO FLOW OFFSITE SOUTH
	1.1	CC-34	0.89	0.50	12.2	0.45	6.43	2.9		1.30		7.5				29.5	5.28	2.0	20	30	10.2	0.05	BS-34 & OVERFLOW FROM DP'S 1 & 1.2 CAPTURED AT 5' SUMP INLET
			0.00	0.00		0.10	0.10	2.0		1.00						20.0	0.20	2.0	2.0		10.2	0.00	
		CC-34.1	15.09	0.38	12.8	5.71	6.31	36.1															BASIN FLOW CAPTURED IN ROADSIDE DITCH, COLLECTED AT DP2 POND
	1.3	CC-34.2	1.84	0.96	22.0	1.77	4.94	8.7		2.09		11.0				40.6	7.37	5.5	3.0	95	22.1	0.07	BS-34.2 & OS-2 CAPTURED W/ 10' TYPE R SUMP INLET, PIPE FLOW FROM DP1.1 & DP1.3 CONVER
		CC-34.3	1.01	0.59	12.0	0.60	6.46	3.9															BS-34.3 TO FLOW DOWNSTREAM INTO ON-GRADE INLET AT DP1
													3.0	0.59	1.0								
	1.2	CC-34.4	3.44	0.83	20.8	2.87	5.09	14.6		2.87		14.6				11.6	2.28	1.1	2.0	185	7.6	0.41	BS-34.4 CAPTURED ON GRADE BY 15' CDOT TYPE R INLET
	2									13.08		76.6											FULL SPECTRUM DETENTION POND A TO BE DESIGNED AT DP2
		OS-1	2.70	0.51	14.4	1.37	6.01	8.2		1.37		8.2											OS-1 TO FLOW DOWNSTREAM INTO ON-GRADE INLET AT DP1
	1									1.96		12.1	1.6	0.26	4.0		1.70	<u>2</u> .0	1.5	305	8.4	0.60	BS-34.3 & OS-2 CAPTURED ON GRADE BY 15' CDOT TYPE R INLET
		OS-2	0.34	0.96	9.5	0.33	7.06	2.3															OS-2 FLOWS TO DP1.3
		OS-17	15.80	0.42	13.6	6.59	6.16	40.6		6.59		40.6											OS-17 FLOWS INTO BS-27
		OS-18	13.00	0.42	13.3	5.42	6.21	33.7		5.42		33.7						L		<u> </u>		L	OS-18 FLOWS INTO BS-29
																			I	1	1		

			Desig	yn Procedu	ire Form:	Runoff Rec	duction								
				UD-BMP (Ve	ersion 3.07, Ma	rch 2018)						Sheet 1 of 1			
Designer:	DLH										_				
Company:	HR GREEN										_				
Date:	August 1, 202	23									_				
Project:	FLYING HOR	SE NORTH FILIN	IG NUMBER	र ३							-				
Location:															
SITE INFORMATION (Us	-		0.00	n											
Dopth of Average Bu		· · –			Vatarahada O	utaida of the F	Jonuar Bagiar	n Figure 2.1		1 2)					
Depth of Average Ru	Downstream BMP Type None 80,000 SF ~ 1.8 ACRES. BECAUSE OF THIS, THE MOST CONSERVATIVE MODEL DCIA (ft²) APPLICABLE HAS BEEN SHOWN TO REPRESENT ALL BASINS THAT FLOW UIA (ft²) 12,000 BROND SPA (ft²) DIRECTLY OFF-SITE. THIS IS MEANT TO PROVE THAT NO WATER QUALITY AND DETENTION IS REQUIRED FOR THESE BASINS DUE TO SUFFICIENT GRASS BUFFERS.														
Area Type	Depth of Average Runoff Producing Storm, de = 0.43 inches (for Watersheds Outside of the Denver Region, Figure 3-1 in USDCM Vol. 3) Area Type Area ID UIA:RPA BS-25 THIS SHEET IS UNABLE TO CONDUCT SWMM CALCULATIONS OF MORE THAN 80,000 SF ~ 1.8 ACRES. BECAUSE OF THIS, THE MOST CONSERVATIVE MODEL APPLICABLE HAS BEEN SHOWN TO REPRESENT ALL BASINS THAT FLOW UIA (ft ²) DCIA (ft ²) - BRA (ft ²) 68,000 SPA (ft ²) - HSG B (%) 100% HSG B (%) 100%														
Downstream Design Point ID			THIS	S SHEET	IS UNAB	LE TO CO	ONDUCT	SWMM C	ALCULA	FIONS OF	MORE T	HAN			
Downstream BMP Type	None		80,0	00 SF ~ 1	.8 ACRE	S. BECAL	JSE OF T	HIS, THE	MOST C	ONSERV	ATIVE MC	DEL			
DCIA (ft ²)															
UIA (ft ²)	12,000		DIRE		F-SITE.	THIS IS M	EANT TO	PROVE	THAT NO	WATER	QUALITY				
RPA (ft ²)	68,000		DE	TENTION	N IS REQ	UIRED FO	OR THES	E BASINS	S DUE TO	SUFFICI	ENT GRA	.ss 🗌			
	SPA (ft ²) BUFFERS. HSG A (%) 0%														
				Ц											
	ASSUMPTIONS MADE: of RPA (ft/ft) 0.330 ENTIRETY OF AREA ANALYZED IS REPRESENTING 2.5 ACR														
HSG C/D (%) Average Slope of RPA (ft/ft)		5 ACRE L	OTS AT 0	11%											
UIA:RPA Interface Width (ft)	75.00		5107110.	H											
UIA.RPA Interface Width (It)	75.00		F (33%)	μ											
	IMPERVIOUS (12,000 SF UIA) - AVERAGE SLOPE IS AT MAX ALLOWABLE GRADING SLO - UIA-RPA INTERFACE WIDTH (75FT)														
CALCULATED RUNOFF	RESULTS								/111(/011)					
Area ID	BS-25		THES								ASONS LI				
UIA:RPA Area (ft ²)	80,000		-								/IOUS WH	-			
L / W Ratio	14.22		- 11	TE 12,000		OKING A									
UIA / Area	0.1500										o⊏ 000/				
Runoff (in)	0.00			- AVE	AGE SL	JPE INK	Ουσποι		ASINS W	ILL NOT E	SE 33%				
Runoff (ft ³)	0														
Runoff Reduction (ft ³)	500		IHE			N 15 100%			PPLIES I	U BASIN	S BS-25, E	55-31, L			
							DO-32,	, BS-33.							
CALCULATED WQCV RE Area ID	BS-25	· · · · ·		I		I	I	1	1	1	,				
WQCV (ft ³)	500														
WQCV Reduction (ft ³)	500														
WQCV Reduction (%)	100%														
Untreated WQCV (ft ³)	0														
								•		•	·I	·			
CALCULATED DESIGN F	POINT RESUL	LTS (sums resu	Its from a	ll columns w	ith the same	Downstream	Design Poin	nt ID)							
Downstream Design Point ID	DP21														
DCIA (ft ²)	0														
UIA (ft ²)	12,000								ļ	ļ	ļļ				
RPA (ft ²)	68,000										ļļ				
SPA (ft ²)	0										ļļ				
Total Area (ft ²) Total Impervious Area (ft ²)	80,000 12,000	├										├─── ┤			
WQCV (ft ³)	500										┝───┤				
WQCV (ft) WQCV Reduction (ft ³)	500	<u> </u>										<u> </u>			
WQCV Reduction (%)	100%														
Untreated WQCV (ft ³)								1	1	1					
ĺ	•				•			•	•	•					
CALCULATED SITE RES		results from al	l columns	in workshee	t)										
Total Area (ft ²)	80,000]													
Total Impervious Area (ft ²)	12,000	1													
WQCV (ft ³)	500	4													
WQCV Reduction (ft ³)	500	4													
WQCV Reduction (%) Untreated WQCV (ft ³)	100% 0	4													
		1													




Flying Horse North Filing No. 3 Final Drainage Report Project No.: 211030.20

El Paso County, Colorado


APPENDIX C

HYDRAULIC CALCULATIONS

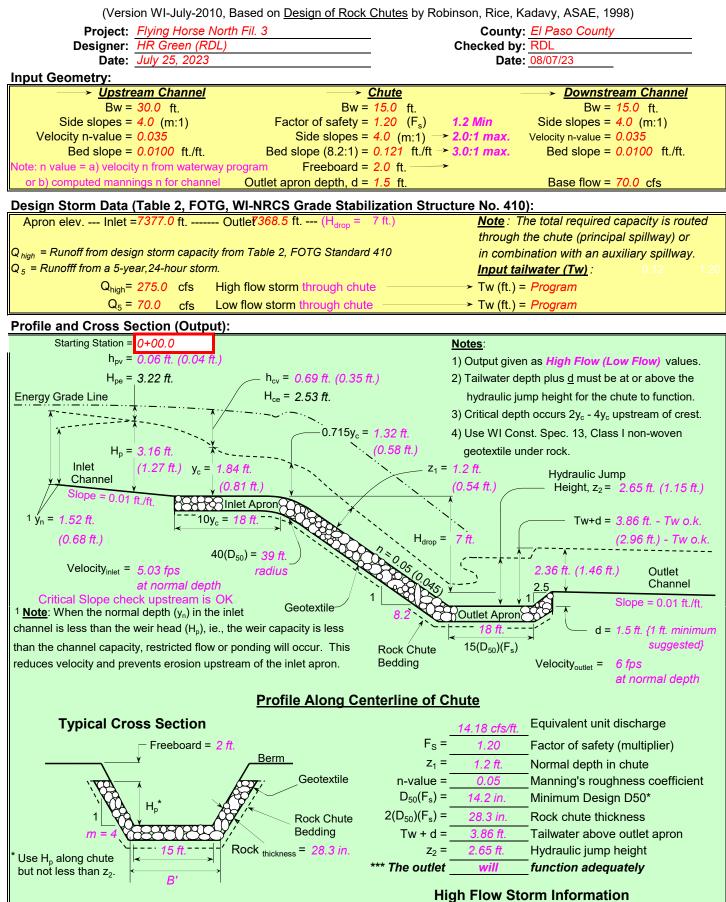


Rock Chute Design - Plan Sheet

(Version WI-July-2010, Based on Design of Rock Chutes by Robinson, Rice, Kadavy, ASAE, 1998)

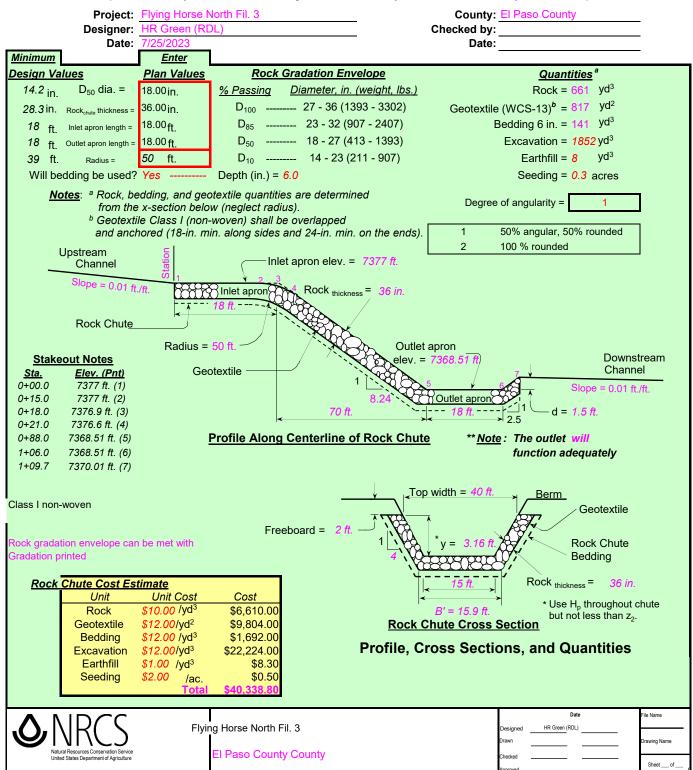

Rock Chute Design - Cut/Paste Plan

(Version WI-July-2010, Based on Design of Rock Chutes by Robinson, Rice, Kadavy, ASAE, 1998)

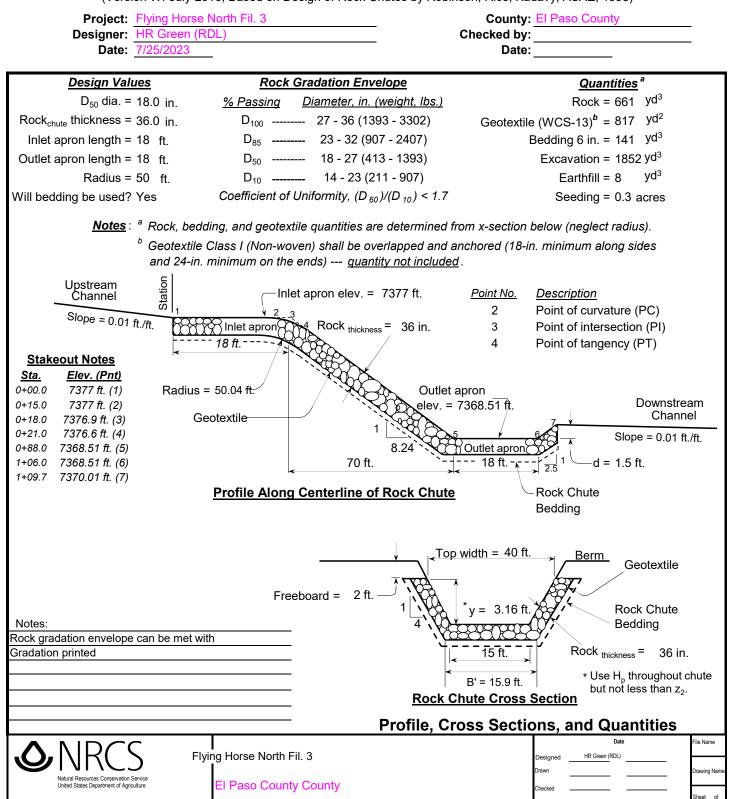

	Riprap	Sizing - DP4	4 OUTLET			Ripra	p Sizing - DP1	1 OUTLET	
q (cfs/ft)	S (ft/ft)	C _f	n	D ₅₀ min. (in)	q (cfs/ft)	S (ft/ft)	C _f	n	D ₅₀ min. (in)
2.86	0.15	2	0	7.26	1.08	0.15	2	0	4.21
-	D'	oll) :							
Type L	Riprap (D ₅₀ =	9") will be protection		r the outlet	Type VI B	(D - 6")	will be utilize	d for the ou	tlet protection.
		protection			Type ver	apiap (D ₅₀ = 0)	will be utilize		tiet protection.
	Riprap S	Sizing - DP1	2 OUTLET	_		Ripra	p Sizing - DP1	3 OUTLET	-
q (cfs/ft)	S (ft/ft)	C _f	n	D ₅₀ min. (in)	q (cfs/ft)	S (ft/ft)	C _f	n	D ₅₀ min. (in)
3.58	0.07	2	0	5.94	4.10	0.15	2	0	8.89
			e utilized fo	or the outlet	Type L Ri	inran (D., = 9")	will be utilize	d for the out	let protection
Type V		protection			.)	prop (0 ₅₀ - 3)			liet protection.
		protection	ı.	PILLWAY		Riprap Sizing -		RGENCY SPIL	•
		protection	ı.	PILLWAY	q (cfs/ft)			RGENCY SPIL n	•
Гуре V		•							net protection.
Rip	rap Sizing - PC	protection	n. ERGENCY S			Riprap Sizing -	POND B EME		LWAY

 $D_{50} = 5.23 \ S^{0.43} \ (1.35 \, C_{\rm f} \, q)^{0.56}$


Where: D_{50}


- S
- median rock size (in)
 longitudinal slope (ft/ft)
 concentration factor (1.0 to 3.0) C_f
- = unit discharge (cfs/ft)

q When:

 $\eta \ (porosity) \ = 0.0 \ (i.e., \ for \ buried \ soil \ riprap)$


Equation 13-9

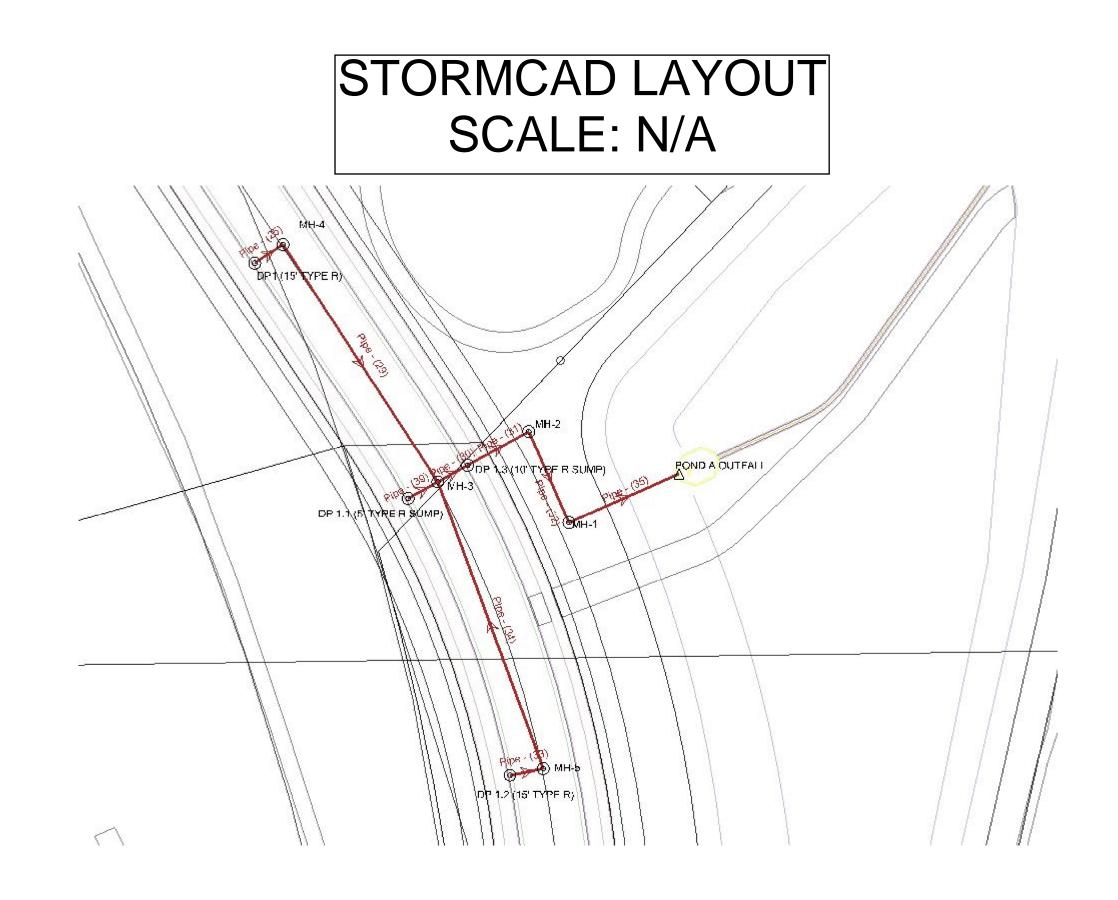

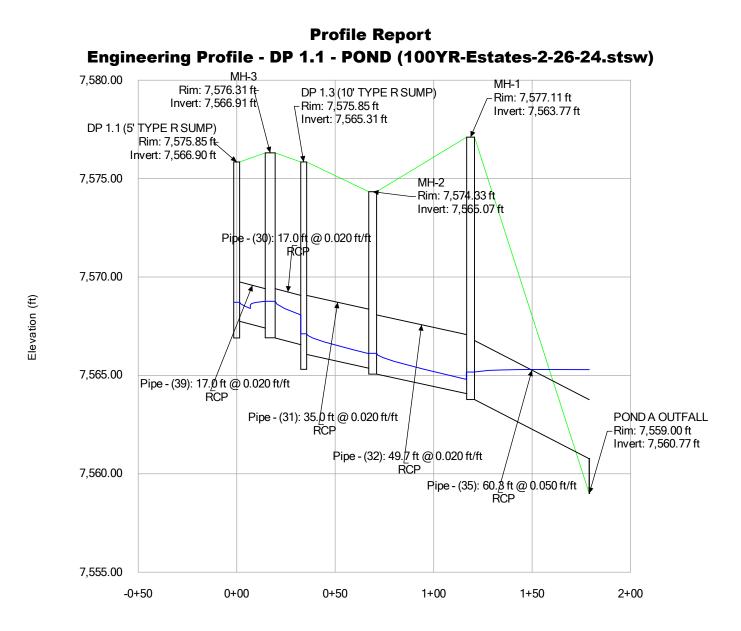


Bentley Systems, Inc. Haestad Methods Solution Center 27 Siemon Company Drive Suite 200 W Watertown, CT 06795 USA +1-203-755-1666

Profile Report Engineering Profile - DP 1.2 - POND (100YR-Estates-2-26-24.stsw)

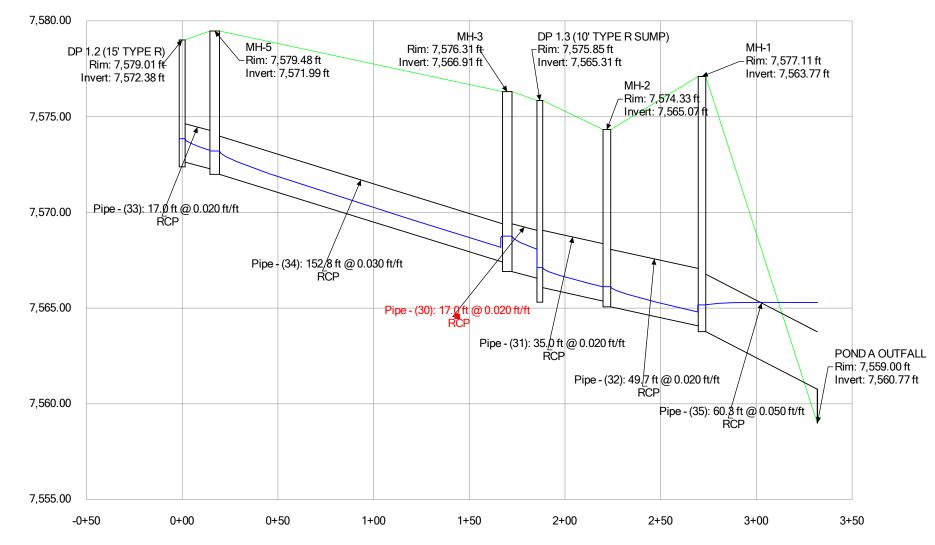

100YR-Estates-2-26-24.stsw 2/26/2024

Bentley Systems, Inc. Haestad Methods Solution Center 27 Siemon Company Drive Suite 200 W Watertown, CT 06795 USA +1-203-755-1666

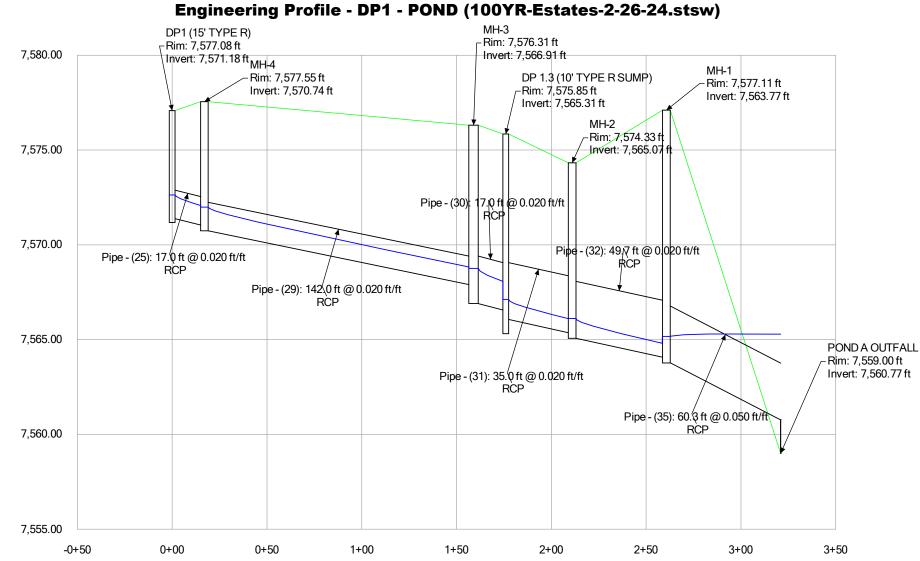

Profile Report

100YR-Estates-2-26-24.stsw 2/26/2024

Bentley Systems, Inc. Haestad Methods Solution Center 27 Siemon Company Drive Suite 200 W Watertown, CT 06795 USA +1-203-755-1666

FLYING HORSE NORTH FILING NO. 3 100 YEAR STORM SCENARIO FlexTable: Conduit Table

Label	Invert (Start) (ft)	Invert (Stop) (ft)	Length (Unified) (ft)	Slope (Calculated) (ft/ft)	Diameter (in)	Flow (cfs)	Velocity (ft/s)	Manning's n	Froude Number (Normal)	Capacity (Full Flow) (cfs)	Headloss (ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)	Energy Grade Line (In) (ft)	Energy Grade Line (Out) (ft)	Depth (Out) (ft)	Flow / Capacity (Design) (%)
Pipe - (35)	7,563.77	7,560.77	60.3	0.050	36.0	11.00	12.33	0.013	3.510	149.04	-0.12	7,565.17	7,565.29	7,565.35	7,565.33	4.52	7.4
Pipe - (31)	7,566.07	7,565.37	35.0	0.020	36.0	11.00	8.92	0.013	2.252	94.31	1.01	7,567.12	7,566.11	7,567.50	7,567.12	0.74	11.7
Pipe - (32)	7,565.07	7,564.08	49.7	0.020	36.0	11.00	8.92	0.013	2.252	94.31	0.95	7,566.12	7,565.17	7,566.51	7,565.52	1.09	11.7
Pipe - (33)	7,572.63	7,572.29	17.0	0.020	24.0	11.60	9.37	0.013	2.083	31.99	0.61	7,573.85	7,573.24	7,574.36	7,574.20	0.95	36.3
Pipe - (34)	7,571.99	7,567.41	152.8	0.030	24.0	11.60	10.86	0.013	2.578	39.17	4.45	7,573.21	7,568.76	7,573.73	7,569.17	1.36	29.6
Pipe - (25)	7,571.39	7,571.05	17.0	0.020	18.0	10.50	9.11	0.013	1.805	14.85	0.56	7,572.63	7,572.07	7,573.33	7,573.10	1.03	70.7
Pipe - (29)	7,570.74	7,567.91	142.0	0.020	18.0	10.50	9.11	0.013	1.805	14.85	3.15	7,571.99	7,568.84	7,572.69	7,570.13	0.93	70.7
Pipe - (30)	7,566.91	7,566.57	17.0	0.020	30.0	29.60	11.87	0.013	2.096	58.00	0.69	7,568.76	7,568.08	7,569.65	7,569.49	1.51	51.0
Pipe - (39)	7,567.75	7,567.41	17.0	0.020	24.0	7.50	8.32	0.013	2.117	31.99	-0.04	7,568.72	7,568.76	7,569.10	7,568.93	1.36	23.4


FLYING HORSE NORTH FILING NO. 3 100 YEAR STORM SCENARIO FlexTable: Manhole Table

ID	Label	Notes	Elevation (Ground) (ft)	Set Rim to Ground Elevation?	Elevation (Rim) (ft)	Elevation (Invert in 1) (ft)	Flow (Total Out) (cfs)	Depth (Out) (ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)	Headloss Method
34	MH-2	SDMH	7,574.33	True	7,574.33	7,565.37	11.00	1.05	7,566.12	7,566.12	Standard
35	MH-5	SDMH	7,579.48	True	7,579.48	7,572.29	11.60	1.22	7,573.21	7,573.21	Standard
36	DP 1.2 (15' TYPE R)	15' TYPE-R INLET	7,579.01	True	7,579.01	(N/A)	11.60	1.47	7,573.85	7,573.85	Standard
37	MH-4	SDMH	7,577.55	True	7,577.55	7,571.05	10.50	1.25	7,571.99	7,571.99	Standard
38	MH-1	SDMH	7,577.11	True	7,577.11	7,564.08	11.00	1.39	7,565.17	7,565.17	Standard
39	DP1 (15' TYPE R)	15' TYPE-R INLET	7,577.08	True	7,577.08	(N/A)	10.50	1.45	7,572.63	7,572.63	Standard
40	MH-3	SDMH	7,576.31	True	7,576.31	7,567.41	29.60	1.86	7,568.76	7,568.76	Standard
41	DP 1.3 (10' TYPE R SUMP)	10' TYPE-R INLET	7,575.85	True	7,575.85	7,566.57	11.00	1.80	7,567.12	7,567.12	Standard
42	DP 1.1 (5' TYPE R SUMP)	5' TYPE-R INLET	7,575.85	True	7,575.85	(N/A)	7.50	1.82	7,568.72	7,568.72	Standard

FLYING HORSE NORTH FILING NO. 3 100 YEAR STORM SCENARIO


FlexTable: Outfall Table

ID	Label	Elevation (Ground) (ft)	Set Rim to Ground Elevation?	Elevation (Invert) (ft)	Boundary Condition Type	Boundary Element	Elevation (User Defined Tailwater) (ft)	Hydraulic Grade (ft)	Flow (Total Out) (cfs)	Notes
83	POND A OUTFALL	7,559.00	True	7,560.77	User Defined Tailwater	<none></none>	7,565.29	7,565.29	11.00	Dummy Null Structure for LandXML purposes

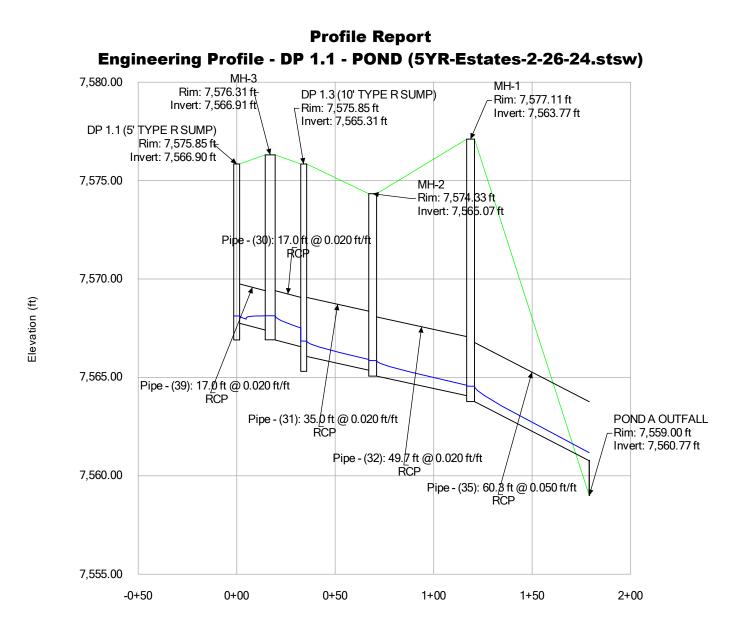


Bentley Systems, Inc. Haestad Methods Solution Center 27 Siemon Company Drive Suite 200 W Watertown, CT 06795 USA +1-203-755-1666

Profile Report Engineering Profile - DP 1.2 - POND (5YR-Estates-2-26-24.stsw)

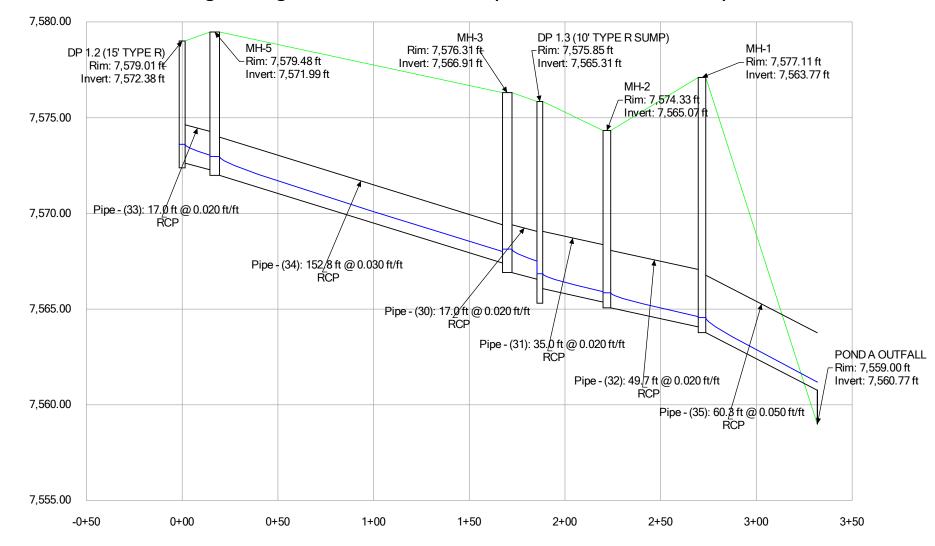

Bentley Systems, Inc. Haestad Methods Solution Center 27 Siemon Company Drive Suite 200 W Watertown, CT 06795 USA +1-203-755-1666

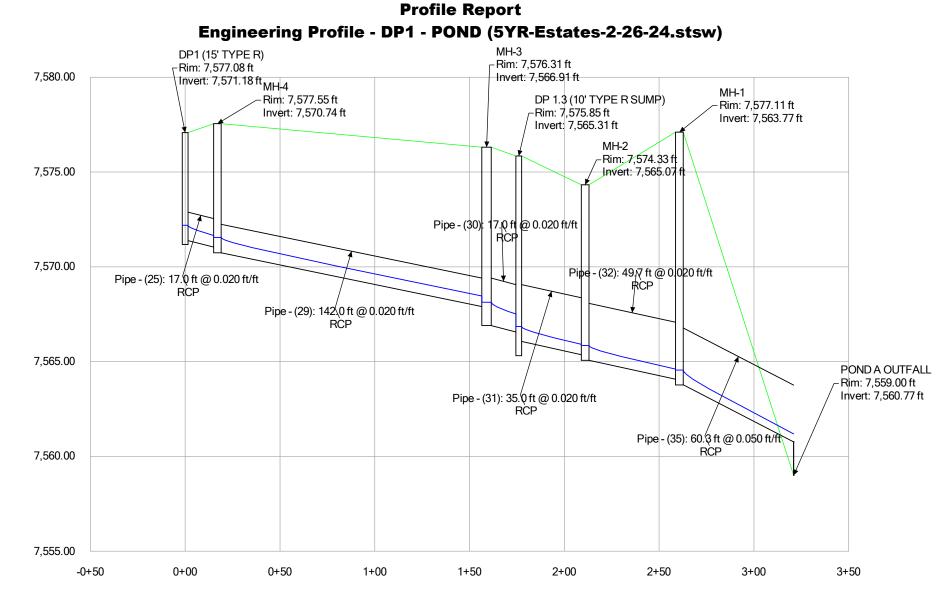

5YR-Estates-2-26-24.stsw 2/26/2024

Bentley Systems, Inc. Haestad Methods Solution Center 27 Siemon Company Drive Suite 200 W Watertown, CT 06795 USA +1-203-755-1666

FLYING HORSE NORTH FILING NO. 3 5 YEAR STORM SCENARIO FlexTable: Conduit Table

Label	Invert (Start) (ft)	Invert (Stop) (ft)	Length (Unified) (ft)	Slope (Calculated) (ft/ft)	Diameter (in)	Flow (cfs)	Velocity (ft/s)	Manning's n	Froude Number (Normal)	Capacity (Full Flow) (cfs)	Headloss (ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)	Energy Grade Line (In) (ft)	Energy Grade Line (Out) (ft)	Depth (Out) (ft)	Flow / Capacity (Design) (%)
Pipe - (35)	7,563.77	7,560.77	60.3	0.050	36.0	6.20	10.40	0.013	3.423	149.04	3.37	7,564.56	7,561.18	7,564.83	7,562.86	0.42	4.2
Pipe - (31)	7,566.07	7,565.37	35.0	0.020	36.0	6.20	7.54	0.013	2.212	94.31	0.94	7,566.85	7,565.91	7,567.13	7,566.69	0.54	6.6
Pipe - (32)	7,565.07	7,564.08	49.7	0.020	36.0	6.20	7.54	0.013	2.212	94.31	1.25	7,565.85	7,564.61	7,566.13	7,565.44	0.53	6.6
Pipe - (33)	7,572.63	7,572.29	17.0	0.020	24.0	7.70	8.37	0.013	2.115	31.99	0.58	7,573.61	7,573.04	7,574.00	7,573.83	0.75	24.1
Pipe - (34)	7,571.99	7,567.41	152.8	0.030	24.0	7.70	9.69	0.013	2.594	39.17	4.97	7,572.98	7,568.01	7,573.36	7,569.46	0.60	19.7
Pipe - (25)	7,571.39	7,571.05	17.0	0.020	18.0	4.40	7.32	0.013	2.007	14.85	0.54	7,572.19	7,571.65	7,572.51	7,572.32	0.61	29.6
Pipe - (29)	7,570.74	7,567.91	142.0	0.020	18.0	4.40	7.32	0.013	2.007	14.85	3.08	7,571.55	7,568.46	7,571.87	7,569.30	0.56	29.6
Pipe - (30)	7,566.91	7,566.57	17.0	0.020	30.0	13.30	9.59	0.013	2.196	58.00	0.62	7,568.13	7,567.51	7,568.61	7,568.46	0.95	22.9
Pipe - (39)	7,567.75	7,567.41	17.0	0.020	24.0	1.20	4.87	0.013	2.015	31.99	-0.01	7,568.12	7,568.13	7,568.25	7,568.15	0.73	3.8

FLYING HORSE NORTH FILING NO. 3 5 YEAR STORM SCENARIO FlexTable: Manhole Table

ID	Label	Notes	Elevation (Ground) (ft)	Set Rim to Ground Elevation?	Elevation (Rim) (ft)	Elevation (Invert in 1) (ft)	Flow (Total Out) (cfs)	Depth (Out) (ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)	Headloss Method
34	MH-2	SDMH	7,574.33	True	7,574.33	7,565.37	6.20	0.78	7,565.85	7,565.85	Standard
35	MH-5	SDMH	7,579.48	True	7,579.48	7,572.29	7.70	0.99	7,572.98	7,572.98	Standard
36	DP 1.2 (15' TYPE R)	15' TYPE-R INLET	7,579.01	True	7,579.01	(N/A)	7.70	1.24	7,573.61	7,573.61	Standard
37	MH-4	SDMH	7,577.55	True	7,577.55	7,571.05	4.40	0.80	7,571.55	7,571.55	Standard
38	MH-1	SDMH	7,577.11	True	7,577.11	7,564.08	6.20	0.78	7,564.56	7,564.56	Standard
39	DP1 (15' TYPE R)	15' TYPE-R INLET	7,577.08	True	7,577.08	(N/A)	4.40	1.01	7,572.19	7,572.19	Standard
40		SDMH	7,576.31	True	7,576.31	7,567.41	13.30	1.23	7,568.13	7,568.13	Standard
41	DP 1.3 (10' TYPE R SUMP)	10' TYPE-R INLET	7,575.85	True	7,575.85	7,566.57	6.20	1.53	7,566.85	7,566.85	Standard
42	DP 1.1 (5' TYPE R SUMP)	5' TYPE-R INLET	7,575.85	True	7,575.85	(N/A)	1.20	1.22	7,568.12	7,568.12	Standard

FLYING HORSE NORTH FILING NO. 3 5 YEAR STORM SCENARIO FlexTable: Outfall Table

ID	Label	Elevation (Ground) (ft)	Set Rim to Ground Elevation?	Elevation (Invert) (ft)	Boundary Condition Type	Boundary Element	Elevation (User Defined Tailwater) (ft)	Hydraulic Grade (ft)	Flow (Total Out) (cfs)	Notes
83	Pond A Outfall	7,559.00	True	7,560.77	Free Outfall	<none></none>		7,561.18	6.20	Dummy Null Structure for LandXML purposes

MHFD-Inlet, Version 5.02 (August 2022)

INLET MANAGEMENT

Worksheet Protected

INLET NAME	DP1	<u>DP1.1</u>	<u>DP1.2</u>
Site Type (Urban or Rural)	URBAN	URBAN	URBAN
Inlet Application (Street or Area)	STREET	STREET	STREET
Hydraulic Condition	On Grade	In Sump	On Grade
Inlet Type	CDOT Type R Curb Opening		CDOT Type R Curb Opening

USER-DEFINED INPUT

User-Defined Design Flows			
Minor Q _{Known} (cfs)	4.4	1.2	7.9
Major Oknown (cfs)	12.1	7.5	14.6

Bypass (Carry-Over) Flow from Upstream Inlets must be organized from upstream (left) to downstream (right) in order for bypass flows to be linked.

Receive Bypass Flow from:	No Bypass Flow Received	No Bypass Flow Received	No Bypass Flow Received
Minor Bypass Flow Received, Q _b (cfs)	0.0	0.0	0.0
Major Bypass Flow Received, Q _b (cfs)	0.0	0.0	0.0

Watershed Characteristics

Subcatchment Area (acres)		
Percent Impervious		
NRCS Soil Type		

Watershed Profile

Overland Slope (ft/ft)		
Overland Length (ft)		
Channel Slope (ft/ft)		
Channel Length (ft)		

Minor Storm Rainfall Input

Design Storm Return Period, T _r (years)		
One-Hour Precipitation, P_1 (inches)		

Major Storm Rainfall Input

Design Storm Return Period, T _r (years)		
One-Hour Precipitation, P_1 (inches)		
		•

CALCULATED OUTPUT

Minor Total Design Peak Flow, Q (cfs)	4.4	1.2	7.9
Major Total Design Peak Flow, Q (cfs)	12.1	7.5	14.6
Minor Flow Bypassed Downstream, Q _b (cfs)	0.0	N/A	0.2
Major Flow Bypassed Downstream, Q _b (cfs)	1.6	N/A	3.0

MHFD-Inlet, Version 5.02 (August 2022)

INLET MANAGEMENT

Worksheet Protected

INLET NAME	<u>DP1.3</u>
Site Type (Urban or Rural)	URBAN
Inlet Application (Street or Area)	STREET
Hydraulic Condition	In Sump
Inlet Type	

USER-DEFINED INPUT

User-Defined Design Flows	
Minor Q _{Known} (cfs)	6.2
Major Q _{Known} (cfs)	11.0

Bypass (Carry-Over) Flow from Upstream

Receive Bypass Flow from:	No Bypass Flow Received		
Minor Bypass Flow Received, Q _b (cfs)	0.0		
Major Bypass Flow Received, Q _b (cfs)	0.0		

Watershed Characteristics

Subcatchment Area (acres)	
Percent Impervious	
NRCS Soil Type	

Watershed Profile

Overland Slope (ft/ft)	
Overland Length (ft)	
Channel Slope (ft/ft)	
Channel Length (ft)	

Minor Storm Rainfall Input


Design Storm Return Period, T _r (years)	
One-Hour Precipitation, P ₁ (inches)	

Major Storm Rainfall Input


Design Storm Return Period, T _r (years)	
One-Hour Precipitation, P_1 (inches)	

CALCULATED OUTPUT


Minor Total Design Peak Flow, Q (cfs)	6.2
Major Total Design Peak Flow, Q (cfs)	11.0
Minor Flow Bypassed Downstream, Q _b (cfs)	N/A
Major Flow Bypassed Downstream, Q _b (cfs)	N/A

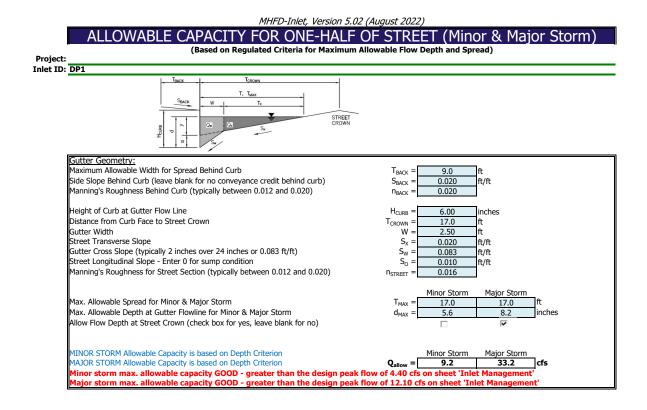


INLET ON A CONTINUOUS GRADE MHFD-Inlet, Version 5.02 (August 2022)

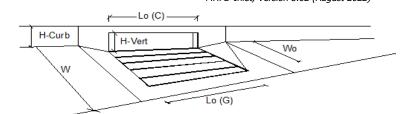


Design Information (Input) CDOT Type R Curb Opening		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R	Curb Opening	
Local Depression (additional to continuous gutter depression 'a')	a _{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L _o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W, Gutter Width)	W _o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	$C_{f}(G) =$	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	$C_{f}(C) =$	0.10	0.10	
Street Hydraulics: OK - Q < Allowable Street Capacity'		MINOR	MAJOR	
Total Inlet Interception Capacity	Q =	4.4	10.5	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	$Q_b =$	0.0	1.6	cfs
Capture Percentage = Q_a/Q_o	C% =	100	87	%

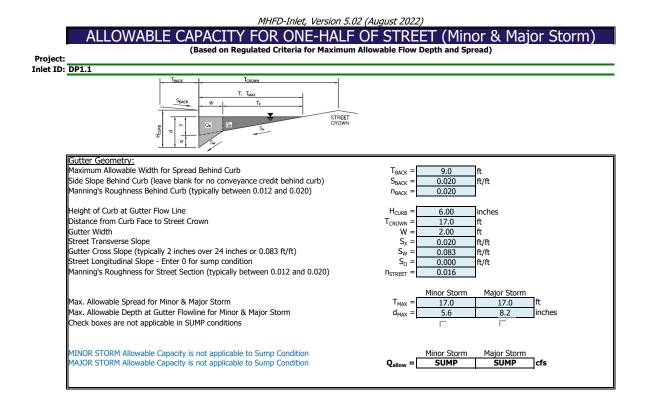


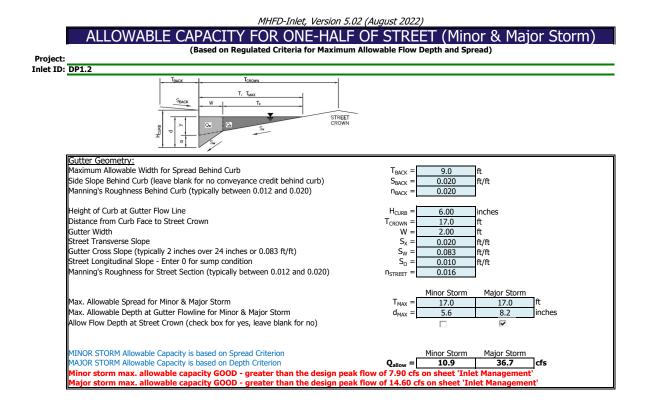

INLET ON A CONTINUOUS GRADE MHFD-Inlet, Version 5.02 (August 2022)

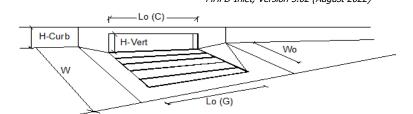

Design Information (Input)		MINOR	MAJOR	_
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a')	a _{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L _o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W, Gutter Width)	W _o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	$C_{f}(G) =$	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	$C_{f}(C) =$	0.10	0.10	
Street Hydraulics: OK - Q < Allowable Street Capacity	-	MINOR	MAJOR	
Total Inlet Interception Capacity	Q =	7.7	11.6	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	$Q_b =$	0.2	3.0	cfs
Capture Percentage = Q_a/Q_o	C% =	97	79	%

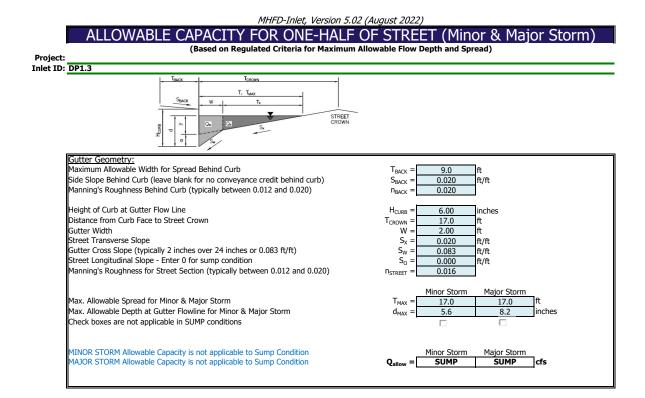

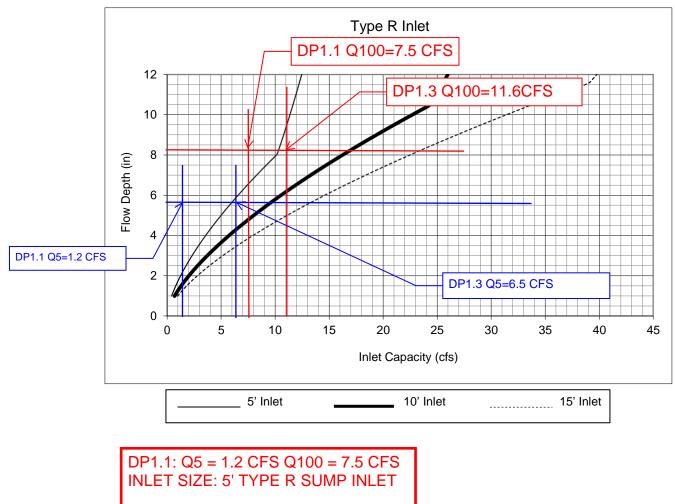


Figure 8-11. Inlet Capacity Chart Sump Conditions , Curb Opening (Type R) Inlet

DP1.3: Q5 = 6.2 CFS Q100 = 11.0 CFS INLET SIZE: 10' TYPE R SUMP INLET

Notes:

1. The standard inlet parameters must apply to use this chart.

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Wednesday, Feb 28 2024

-16.00

450.0

DP4 CULVERT

7502.00

0.0

50.0

100.0

150.0

Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft) Rise (in) Shape Span (in) No. Barrels n-Value Culvert Type Culvert Entrance Coeff. K,M,c,Y,k Embankment Top Elevation (ft) Top Width (ft)	oncrete ge w/headwall (C) 0.0398, 0.67, 0.5	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft) Highlighted Qtotal (cfs) Qpipe (cfs) Qovertop (cfs) Veloc Dn (ft/s) Veloc Up (ft/s) HGL Dn (ft) HGL Up (ft) Hw Elev (ft) Hw/D (ft) Flow Regime	= 8.50 = 34.30 = (dc+D)/2 = 34.30 = 34.30 = 0.00 = 5.55 = 7.26 = 7510.66 = 7519.90 = 7520.89 = 0.96 = Inlet Control	
Elev (ft)	Profile		Hw Depth (ft)	
7544.00			26.00)
7538.00			20.00)
7532.00			14.00)
7526.00	Embankment		8.00	
7520.00			Hw 2.00	
7514.00 HGL	24.09 Lf of 30(in) @ 4	37 %	-4.00	
7508.00			-10.00	0

250.0

300.0

350.0

400.0

200.0

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

DP11 CULVERT

Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft) Rise (in)	= 7543.81 = 60.00 = 1.05 = 7544.44 = 18.0	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft)	= 3.00 = 5.40 = (dc+D)/2
Shape	= Circular	Highlighted	
Span (in)	= 18.0	Qtotal (cfs)	= 5.40
No. Barrels	= 1	Qpipe (cfs)	= 5.40
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	 Circular Concrete 	Veloc Dn (ft/s)	= 3.57
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 4.91
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7545.01
		HGL Up (ft)	= 7545.33
Embankment		Hw Elev (ft)	= 7545.79


Top Elevation (ft) Top Width (ft) Crest Width (ft)

= 7547.69 = 32.00 = 100.00

Cal	اسما	otio	20	

nin (cfs)	= 3.00
nax (cfs)	= 5.40
ilwater Élev (ft)	= (dc+D)/2
ghlighted	
otal (cfs)	= 5.40
ine (cfs)	= 540

	0.10
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 3.57
Veloc Up (ft/s)	= 4.91
HGL Dn (ft)	= 7545.01
HGL Up (ft)	= 7545.33
Hw Elev (ft)	= 7545.79
Hw/D (ft)	= 0.90
Flow Regime	= Inlet Control

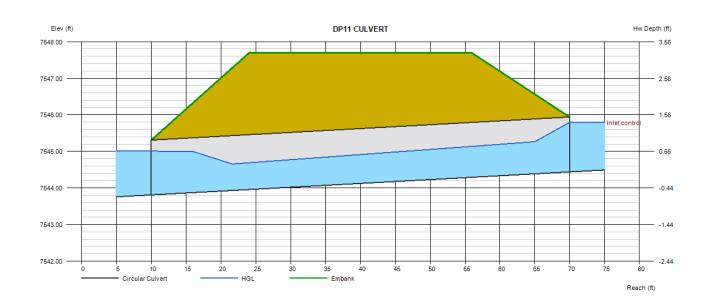

Thursday, Jul 27 2023

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

DP12 CULVERT


Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft) Rise (in)	= 7474.48 = 60.00 = 0.52 = 7474.79 = 24.0	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft)	= 5.90 = 17.90 = (dc+D)/2
Shape	= Circular	Highlighted	
Span (in)	= 24.0	Qtotal (cfs)	= 17.90
No. Barrels	= 1	Qpipe (cfs)	= 17.90
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 6.11
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 6.97
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7476.24
		HGL Up (ft)	= 7476.31
Embankment		Hw Elev (ft)	= 7477.42

Em Top Elevation (ft) Top Width (ft) Crest Width (ft)

=	7479.13
=	32.00
=	100.00

Hw/D (ft) = 1.31

Flow Regime = Inlet Control

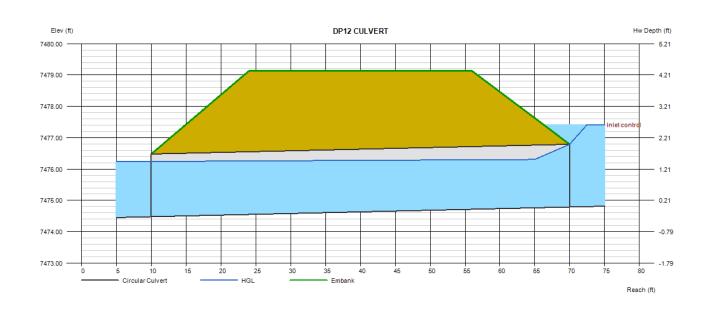

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

DP13 CULVERT


Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft) Rise (in)	= 7455.27 = 160.00 = 5.29 = 7463.74 = 36.0	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft)	= 9.00 = 41.00 = (dc+D)/2
Shape	= Circular	Highlighted	
Span (in)	= 36.0	Qtotal (cfs)	= 37.80
No. Barrels	= 1	Qpipe (cfs)	= 37.80
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 6.01
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 7.56
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7457.77
		HGL Up (ft)	= 7465.74
Embankment		Hw Elev (ft)	= 7466.83

En

Top Elevation (ft) Top Width (ft) Crest Width (ft)

=	7472.19
=	32.00
=	100.00

Qtotal (cfs)	=	37.80
Qpipe (cfs)	=	37.80
Qovertop (cfs)	=	0.00
Veloc Dn (ft/s)	=	6.01
Veloc Up (ft/s)	=	7.56
HGL Dn (ft)	=	7457.77
HGL Up (ft)	=	7465.74
Hw Elev (ft)	=	7466.83
Hw/D (ft)	=	1.03
Flow Regime	=	Inlet Control

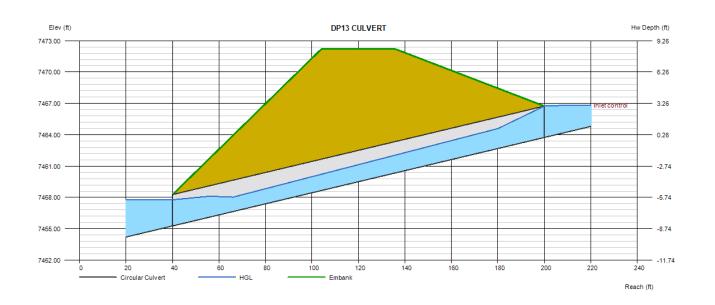

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Wednesday, Aug 2 2023

DP14 CULVERT


Invert Elev Dn (ft)	= 7377.18	Calculations	
Pipe Length (ft)	= 84.00	Qmin (cfs)	= 20.00
Slope (%)	= 5.14	Qmax (cfs)	= 114.00
Invert Elev Up (ft)	= 7381.50	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 48.0		
Shape	= Circular	Highlighted	
Span (in)	= 48.0	Qtotal (cfs)	= 110.00
No. Barrels	= 1	Qpipe (cfs)	= 110.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 9.26
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 10.31
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7380.76
		HGL Up (ft)	= 7384.67
Embankment		Hw Elev (ft)	= 7387.13
Top Elevation (ft)	= 7388 50		= 1/1

Top Elevation (ft) Top Width (ft) Crest Width (ft)

=	7388.50
=	32.00
_	50 00

= 50.00

Qtotal (cfs)	=	110.00
Qpipe (cfs)	=	110.00
Qovertop (cfs)	=	0.00
Veloc Dn (ft/s)	=	9.26
Veloc Up (ft/s)	=	10.31
HGL Dn (ft)	=	7380.76
HGL Up (ft)	=	7384.67
Hw Elev (ft)	=	7387.13
Hw/D (ft)	=	1.41
Flow Regime	=	Inlet Control

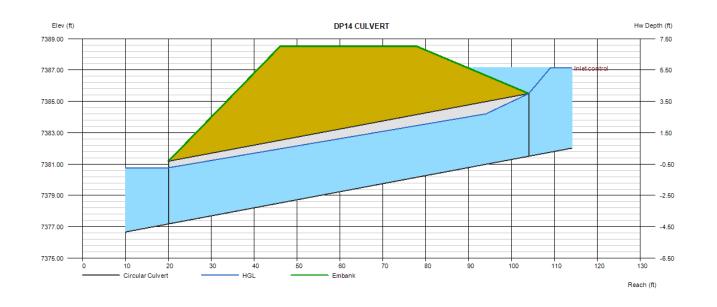

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Wednesday, Aug 2 2023

DP16 DUAL CULVERT


Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft)	= 7377.18 = 150.00 = 5.75 = 7385.80	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft)	= 20.00 = 159.00 = (dc+D)/2
Rise (in)	= 42.0	(),	()
Shape	= Circular	Highlighted	
Span (in)	= 42.0	Qtotal (cfs)	= 150.00
No. Barrels	= 2	Qpipe (cfs)	= 150.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 8.31
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 9.39
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7380.29
		HGL Up (ft)	= 7388.51
Embankment		Hw Elev (ft)	= 7390.46
Top Elevation (ft)	- 7200 50		- 1 22

Top Elevation (ft) Top Width (ft)

Crest Width (ft)

=	7390.50
=	1.00
=	50.00

Qtotal (cfs)	=	150.00
Qpipe (cfs)	=	150.00
Qovertop (cfs)	=	0.00
Veloc Dn (ft/s)	=	8.31
Veloc Up (ft/s)	=	9.39
HGL Dn (ft)	=	7380.29
HGL Up (ft)	=	7388.51
Hw Elev (ft)	=	7390.46
Hw/D (ft)	=	1.33
Flow Regime	=	Inlet Control

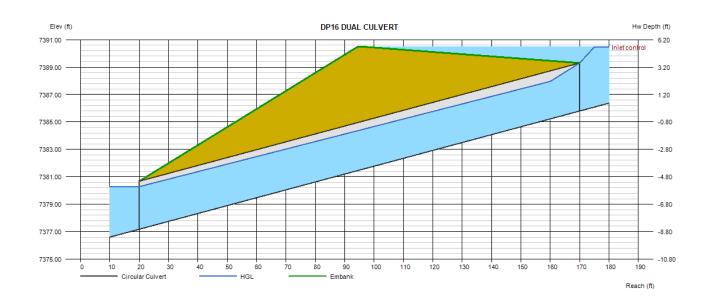

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Aug 3 2023

GOLF CART CULVERT #1

Invert Elev Dn (ft) Pipe Length (ft)	= 7515.13 = 20.00	Calculations Qmin (cfs)	= 5.90
Slope (%)	= 4.35	Qmax (cfs)	= 17.90
Invert Elev Up (ft)	= 7516.00	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 18.0		
Shape	= Circular	Highlighted	
Span (in)	= 18.0	Qtotal (cfs)	= 17.90
No. Barrels	= 1	Qpipe (cfs)	= 11.26
n-Value	= 0.012	Qovertop (cfs)	= 6.64
Culvert Type	 Circular Concrete 	Veloc Dn (ft/s)	= 6.59
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 7.00
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7516.52
		HGL Up (ft)	= 7517.28
Embankment		Hw Elev (ft)	= 7518.59
Top Elevation (ft)	= 7518.36	Hw/D (ft)	= 1.73
Top Width (ft)	= 12.00	Flow Regime	= Inlet Contro

I op Elevation (ft) Top Width (ft) Crest Width (ft)

=	7518.36
=	12.00
=	20.00

20.00

(10.3)	- 7.00
(ft)	= 7516.5
(ft)	= 7517.2
(ft)	= 7518.5
	= 1.73

= Inlet Control



Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Aug 3 2023


GOLF CART CULVERT #2

Invert Elev Dn (ft)	= 7515.61	Calculations	
Pipe Length (ft)	= 20.00	Qmin (cfs)	= 4.90
Slope (%)	= 4.15	Qmax (cfs)	= 20.40
Invert Elev Up (ft)	= 7516.44	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 18.0	. ,	, , , , , , , , , , , , , , , , , , ,
Shape	= Circular	Highlighted	
Span (in)	= 18.0	Qtotal (cfs)	= 20.40
No. Barrels	= 1	Qpipe (cfs)	= 11.87
n-Value	= 0.012	Qovertop (cfs)	= 8.53
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 6.91
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 7.26
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7517.01
		HGL Up (ft)	= 7517.75
Embankment		Hw Elev (ft)	= 7519.21
Top Elevation (ft)	= 7518 94		= 1.85

Top Elevation (ft) Top Width (ft) Crest Width (ft)

= 7518.94 = 12.00 = 20.00

Qtotal (cfs)	=	20.40
Qpipe (cfs)	=	11.87
Qovertop (cfs)	=	8.53
Veloc Dn (ft/s)	=	6.91
Veloc Up (ft/s)	=	7.26
HGL Dn (ft)	=	7517.01
HGL Up (ft)	=	7517.75
Hw Elev (ft)	=	7519.21
Hw/D (ft)	=	1.85
Flow Regime	=	Inlet Control

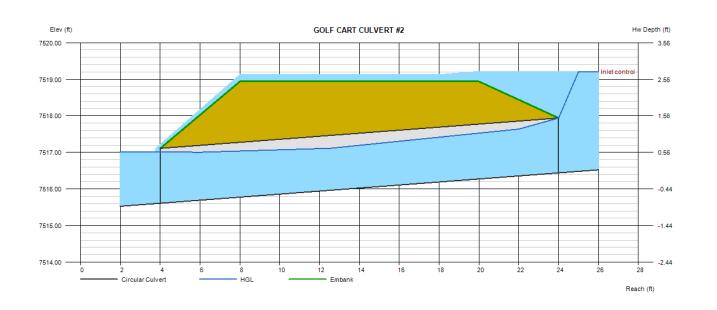

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

LOT 2


Invert Elev Dn (ft)	= 1.00	Calculations	
Pipe Length (ft)	= 24.00	Qmin (cfs)	= 1.00
Slope (%)	= 6.50	Qmax (cfs)	= 15.00
Invert Elev Up (ft)	= 2.56	Tailwater Élev (ft)	= (dc+D)/2
Rise (in)	= 18.0		
Shape	= Circular	Highlighted	
Span (in)	= 18.0	Qtotal (cfs)	= 15.00
No. Barrels	= 2	Qpipe (cfs)	= 15.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 4.67
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 5.62
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 2.28
		HGL Up (ft)	= 3.62
Embankment		Hw Elev (ft)	= 4.24
Top Elevation (ft)	= 5.06	Hw/D (ft)	= 1.12
Top Width (ft)	= 20.00	Flow Regime	= Inlet Contro
	~~~~		

Top Elevation (ft) Top Width (ft) Crest Width (ft)

=	5.06	
=	20.00	
	~~ ~~	

= 20.00

= Inlet Control

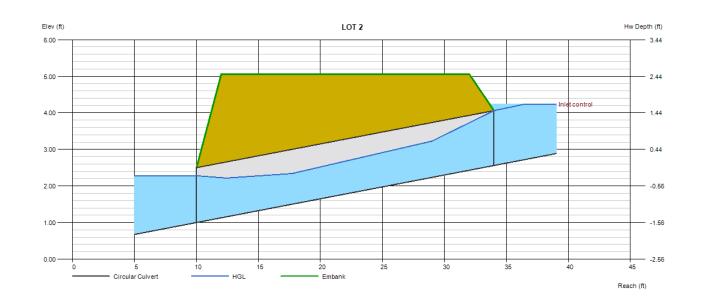

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

#### LOTS 11-14

Invert Elev Dn (ft)	= 1.00	Calculations	
Pipe Length (ft)	= 24.00	Qmin (cfs)	= 1.00
Slope (%)	= 5.71	Qmax (cfs)	= 20.40
Invert Elev Up (ft)	= 2.37	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 18.0		
Shape	= Circular	Highlighted	
Span (in)	= 18.0	Qtotal (cfs)	= 19.20
No. Barrels	= 2	Qpipe (cfs)	= 19.20
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	<ul> <li>Circular Concrete</li> </ul>	Veloc Dn (ft/s)	= 5.74
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 6.36
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 2.35
		HGL Up (ft)	= 3.57
Embankment		Hw Elev (ft)	= 4.51
Top Elevation (ft)	= 4.87	Hw/D (ft)	= 1.42
Top Width (ft)	= 20.00	Flow Regime	= Inlet Control
Crest Width (ft)	= 20.00		

Elev (ft) LOTS 11-14 Hw Depth (ft) 5.00 - 2.63 control 4.00 1.63 3.00 0.63 2.00 -0.37 1.00 -1.37 0.00 --2.37 10 15 20 25 30 35 40 45 Circular Culvert HGL Embank Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Monday, Jul 24 2023

### LOTS 15, 16, 20, 21, 22


Invert Elev Dn (ft)	= 1.00	Calculations	
Pipe Length (ft)	= 24.00	Qmin (cfs)	= 20.00
Slope (%)	= 3.00	Qmax (cfs)	= 114.00
Invert Elev Up (ft)	= 1.72	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 36.0		
Shape	= Circular	Highlighted	
Span (in)	= 36.0	Qtotal (cfs)	= 110.00
No. Barrels	= 2	Qpipe (cfs)	= 110.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	<ul> <li>Circular Concrete</li> </ul>	Veloc Dn (ft/s)	= 8.20
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 9.05
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 3.70
		HGL Up (ft)	= 4.12
Embankment		Hw Elev (ft)	= 6.09
Top Elevation (ft)	= 6.22	Hw/D (ft)	= 1.46
Top Width (ft)	= 20.00	Flow Regime	= Inlet Control
Crest Width (ft)	= 20.00		

Elev (ft) LOTS 15, 16, 20, 21, 22 Hw Depth (ft) 5.28 7.00 4.28 6.00 5.00 3.28 4.00 2.28 3.00 1.28 2.00 0.28 1.00 -0.72 0.00 --1.72 10 15 20 25 30 35 40 45 Circular Culvert HGL Embank Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

#### LOTS 17-18

Invert Elev Dn (ft)	= 1.00	Calculations	
Pipe Length (ft)	= 24.00	Qmin (cfs)	= 20.00
Slope (%)	= 3.00	Qmax (cfs)	= 160.00
Invert Elev Up (ft)	= 1.72	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 42.0		
Shape	= Circular	Highlighted	
Span (in)	= 42.0	Qtotal (cfs)	= 160.00
No. Barrels	= 2	Qpipe (cfs)	= 160.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	<ul> <li>Circular Concrete</li> </ul>	Veloc Dn (ft/s)	= 8.78
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 9.72
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 4.15
		HGL Up (ft)	= 4.51
Embankment		Hw Elev (ft)	= 6.76
Top Elevation (ft)	= 6.97	Hw/D (ft)	= 1.44
Top Width (ft)	= 20.00	Flow Regime	= Inlet Control
Crest Width (ft)	= 20.00		

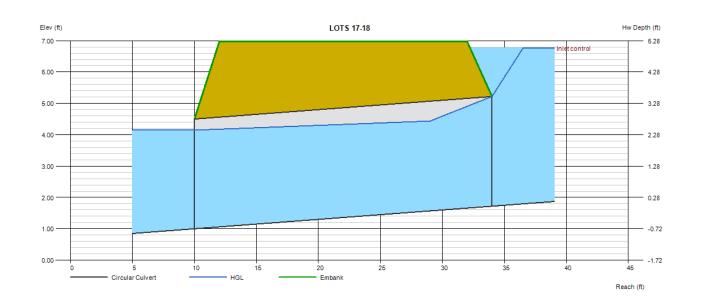

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

#### LOTS 23-24

Invert Elev Dn (ft)	= 1.00	Calculations	
Pipe Length (ft)	= 24.00	Qmin (cfs)	= 5.00
Slope (%)	= 6.00	Qmax (cfs)	= 32.90
Invert Elev Up (ft)	= 2.44	Tailwater Elev (ft)	= (dc+D)/2
Rise (in)	= 24.0		
Shape	= Circular	Highlighted	
Span (in)	= 24.0	Qtotal (cfs)	= 30.00
No. Barrels	= 2	Qpipe (cfs)	= 30.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 5.28
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 6.41
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 2.70
		HGL Up (ft)	= 3.83
Embankment		Hw Elev (ft)	= 4.64
Top Elevation (ft)	= 5.14	Hw/D (ft)	= 1.10
	~~~~		

L II	ina	IINII	ient	
То	p El	leva	tion	(

Top Width (ft) Crest Width (ft)


=	5.14
=	20.00
	00.00

= 20.00

pe (cfs)	= 30.00
/ertop (cfs)	= 0.00
oc Dn (ft/s)	= 5.28
oc Up (ft/s)	= 6.41
L Dn (ft)	= 2.70
L Up (ft)	= 3.83
Elev (ft)	= 4.64
/D (ft)	= 1.10

Flow Regime

= Inlet Control

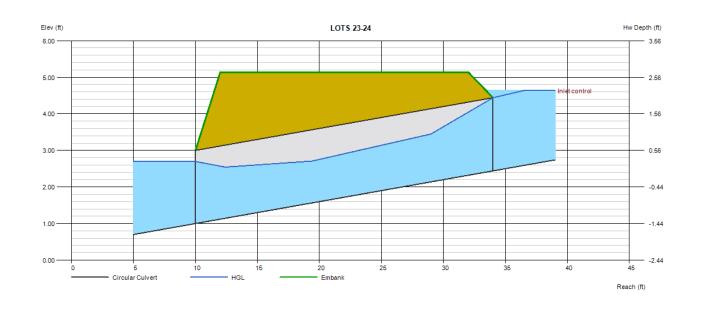

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Monday, Mar 4 2024


LOT 42 & 43 DRIVEWAY CULVERTS

Invert Elev Dn (ft)	= 1.00	Calculations	
Pipe Length (ft)	= 25.00	Qmin (cfs)	= 20.00
Slope (%)	= 8.52	Qmax (cfs)	= 35.00
Invert Elev Up (ft)	= 3.13	Tailwater Élev (ft)	= (dc+D)/2
Rise (in)	= 24.0		, , , , , , , , , , , , , , , , , , ,
Shape	= Circular	Highlighted	
Span (in)	= 24.0	Qtotal (cfs)	= 35.00
No. Barrels	= 1	Qpipe (cfs)	= 25.95
n-Value	= 0.012	Qovertop (cfs)	= 9.05
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 8.44
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 8.77
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 2.89
		HGL Up (ft)	= 4.91
Embankment		Hw Elev (ft)	= 7.10
Top Elevation (ft)	= 7.00	Hw/D (ft)	= 1.99
T_{a} $(\Lambda/)$	- 00.00		— Indat Cantural

Top Width (ft) Crest Width (ft)

=	7.00
=	20.00
=	100.00

Qtotal (cfs)	=	35.00
Qpipe (cfs)	=	25.95
Qovertop (cfs)	=	9.05
Veloc Dn (ft/s)	=	8.44
Veloc Up (ft/s)	=	8.77
HGL Dn (ft)	=	2.89
HGL Up (ft)	=	4.91
Hw Elev (ft)	=	7.10
Hw/D (ft)	=	1.99
Flow Regime	=	Inlet Control

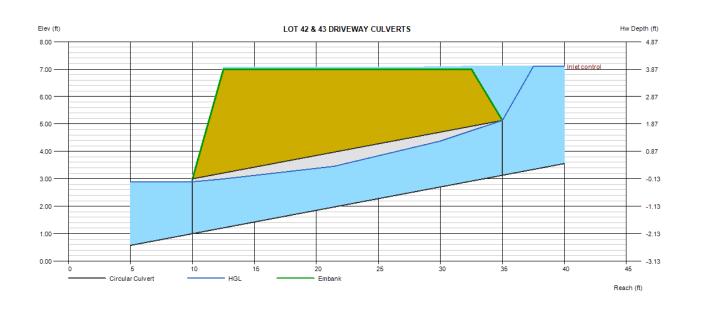

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

-1.34

26.0

TRAIL CROSSING #1

7473.00

0.0

2.0

4.0

6.0

8.0

10.0

Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft) Rise (in)	= 0.59	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft)	= 6.00 = 18.00 = (dc+D)/2
Shape Span (in) No. Barrels n-Value Culvert Type Culvert Entrance Coeff. K,M,c,Y,k	= Elliptical = 29.0 = 1 = 0.012 = Horizontal Ellipse Con	vall (H) Veloc Up (ft/s)	= 18.00 = 18.00 = 0.00 = 6.76 = 7.27 = 7475.53 = 7475.54
Embankment Top Elevation (ft) Top Width (ft) Crest Width (ft)	= 7477.70 = 5.00 = 30.00	Hw Elev (ft) Hw/D (ft) Flow Regime	= 7476.93 = 1.73 = Inlet Control
Elev (ft)	Р	Profile	Hw Depth (ft)
7478.00	Emba	Inkment	3.66 HW 2.66
7476.00 HGL			1.66
7475.00	17 00 Lf of 18 x 29(ii	in) Elliptical @ 0.59 %	0.66
7474.00			-0.34

12.0

14.0

16.0

18.0

20.0

22.0

24.0

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

TRAIL CROSSING #2

0.0

2.0

6.0

4.0

8.0

10.0

12.0

Invert El Pipe Ler Slope (% Invert El Rise (in)	ngth (ft %) lev Up)	= = =	7474, 20.00 2.90 7475, 18.0)				Qm Qm	l culat i nin (cfs nax (cf lwater	s) s)	(ft)	=	6.00 20.40 (dc+D))/2
Shape Span (in No. Barr n-Value Culvert Culvert I Coeff. K	n) rels Type Entran		= = = = =	Ellipti 29.0 1 0.012 Horiz Squa		e w/he	eadwal	ll (H)	Qto Qp Qo Vel Vel HG	oc Dn oc Up L Dn (s) (cfs) (ft/s) (ft/s)		= = = =	20.00 17.98 2.02 6.75 7.94 7476.0 7476.4	
Embanl Top Elev Top Wic Crest W	vation 1th (ft)	()	=	7477 5.00 30.00					Hw Hw	-	(ft)		= =	7477.8 1.71 Inlet C	39
Elev (ft))						Pro	file						Hw De	pth (ft)
7478.00 —							Embor	ikment					$\left \right $	Hw	2.68
7477.00 —			4					Kinent				\geq			— 1.68
7476.00 —	HGL				20.00	Lf of 18	3 x 29(ir	ı) Elliptio	cal @ 2	.90 %				P	— 0.68
7475.00 —	•														-0.32
7474.00 —															— -1.32
7473.00 —	0 2	0 4	06	0 8	0 10	0 12	20 14	.0 16	0 18	0 20) 0 23	20 24	10 26	30 28	-2.32

14.0

16.0

18.0

20.0

22.0

24.0

26.0

28.0

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

TRAIL CROSSING #3


Invert Elev Dn (ft) Pipe Length (ft) Slope (%) Invert Elev Up (ft) Rise (in)	= 7543.07 = 17.00 = 2.12 = 7543.43 = 18.0	Calculations Qmin (cfs) Qmax (cfs) Tailwater Elev (ft)	= 1.00 = 6.00 = (dc+D)/2
Shape	= Circular	Highlighted	
Span (in)	= 18.0	Qtotal (cfs)	= 6.00
No. Barrels	= 1	Qpipe (cfs)	= 6.00
n-Value	= 0.012	Qovertop (cfs)	= 0.00
Culvert Type	= Circular Concrete	Veloc Dn (ft/s)	= 3.89
Culvert Entrance	= Square edge w/headwall (C)	Veloc Up (ft/s)	= 5.12
Coeff. K,M,c,Y,k	= 0.0098, 2, 0.0398, 0.67, 0.5	HGL Dn (ft)	= 7544.29
		HGL Up (ft)	= 7544.38
Embankment		Hw Elev (ft)	= 7544.88

E Top Elevation (ft)

Top Width (ft) Crest Width (ft)

=	7546.14
=	5.00
=	30.00

Qtotal (cfs)	=	6.00
Qpipe (cfs)	=	6.00
Qovertop (cfs)	=	0.00
Veloc Dn (ft/s)	=	3.89
Veloc Up (ft/s)	=	5.12
HGL Dn (ft)	=	7544.29
HGL Up (ft)	=	7544.38
Hw Elev (ft)	=	7544.88
Hw/D (ft)	=	0.97
Flow Regime	=	Inlet Control

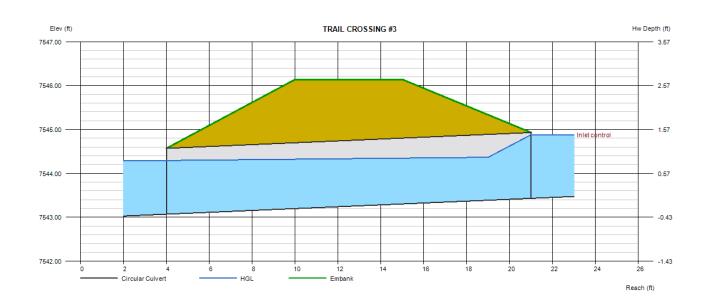

Tuesday, Feb 27 2024

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

-1.73

24.0

TRAIL CROSSING #4

7542.00

2.0

0.0

4.0

6.0

8.0

Invert E Pipe Le Slope (^c Invert E Rise (in	ngth (ft) %) lev Up (= 16 = 3.0	06 43.73				Qmin Qma	ulation i (cfs) x (cfs) rater Ele		=	2.00 20.00 (dc+D)/2
Shape Span (ir No. Bar n-Value Culvert Culvert Coeff. K	n) rels Type Entranc	= Ci = 18 = 1 = 0.0 = Ci = Sc	rcular .0 012 rcular C juare e	Concrete dge w/h , 0.0398	e neadwal 8, 0.67,	ll (C) 0.5	Qtota Qpipo Qove Veloo Veloo HGL	lighted al (cfs) e (cfs) ertop (cf c Dn (ft/ c Up (ft/ Dn (ft) Up (ft)	fs) (s) (s)	= = = =	20.00 11.40 8.60 6.66 7.06 7544.6 7545.0	
Emban Top Ele Top Wid Crest W	vation (dth (ft)	= 75 = 5.0 = 30					Hw E Hw/D	lev (ft)		= =	7546.3 1.76 Inlet C	37
Elev (ft))				Pro	ofile					Hw De	epth (ft)
7547.00 —												3.27
											Hw	
7546.00 —												2.27
					Embar	nkment						
7545.00 —												- 1.27
	HGL											-
				16.00) Lf of 18	(in) @ 3.	06 %					-
7544.00 —												0.27
												-
7543.00 —												-0.73

12.0

14.0

16.0

18.0

20.0

22.0

10.0

			DRIVEWAY CULVERT SIZING C	CALCULATIONS
LOT	100-YR FLOW	CULVERT SIZE	ANTICIPATED DRIVEWAY LOCATION	NOTES
NUMBER	CFS	INCH	(24' MAX WIDTH)	(SEE APPENDIX FOR NON-STD. DRIVEWAY CULVERT CALCS)
3	15	Dual 18	EAST OF LOT	See appendix for calculations
4	12	18	NORTH EAST OF LOT	
5	3.1	18	EAST SIDE OF LOT	
6	3.1	18	NORTH PART OF KNUCKLE	
7	3.1	18	EAST SIDE OF KNUCKLE	
8	3.1	18	SOUTH EAST SIDE OF KNUCKLE	
9	6	18	NORTH SIDE OF LOT	
10	10	18	SOUTH SIDE OF LOT	
11	8	18	WEST STREET NORTH SIDE OF LOT	
12	20.4	Dual 18	CENTER OF LOT	See appendix for calculations
13	20.4	Dual 18	EAST SIDE OF LOT	See appendix for calculations
14	20.4		WEST SIDE OF LOT	See appendix for calculations
15	20.4	Dual 18	EAST SIDE OF LOT	See appendix for calculations
16	93.8		CENTER/WEST OF LOT	See appendix for calculations
17	110		CENTER OF LOT	See appendix for calculations
18	130		CENTER/EAST OF LOT	See appendix for calculations
19			SOUTH EAST PART OF C.D.S. BULB	See appendix for calculations
20	10		WEST END OF C.D.S. BULB	Cumulative flows to DP14 will be diverted before lot
21	10		NORTH SIDE OF C.D.S. BULB	Cumulative flows to DP14 will be diverted before lot
22	114		EAST SIDE OF LOT	See appendix for calculations
23	90		EAST SIDE OF LOT	See appendix for calculations
24	32.9		EAST SIDE OF LOT	See appendix for calculations
25	32.9		SOUTHERN STREET WEST SIDE	See appendix for calculations
26	4.5		NORTH SIDE OF LOT	
27	3.1		WEST SIDE OF LOT	
28	8		CENTER OF LOT	
29	10		CENTER OF LOT	
30			CENTER OF LOT	
31	19.6		CENTER/EAST SIDE OF LOT	
32	10.0		EAST SIDE HIGH POINT	
33	7		SOUTHERN STREET WEST SIDE	
34	1.5		CENTER SOUTH OF LOT	
35	4.1		CENTER OF LOT	
36	14.2		END OF C.D.S. BULB	
30	14.2		EAST SIDE OF C.D.S. BULB	
38	8		SOUTH SIDE OF LOT	
39	6		CENTER OF LOT	
40	-	-	NORTH SIDE OF LOT	
40	5.4		WEST STREET SOUTH SIDE	
41	5.4		CENTER/WEST OF LOT	
42	5.4		CENTER OF LOT	
43	3.4		CENTER OF LOT	
44	10		CENTER/EAST OF LOT	
45	14		CENTER OF LOT	
46	-		CENTER OF LOT CENTER/EAST OF LOT	
47			CENTER/EAST OF LOT	
-	N/A	18	CENTER OF LOT	
	N/A N/A		CENTER OF LOT	
	N/A N/A		CENTER OF LOT	
42 & 43	N/A 35	24	CHANNEL D-D CROSSING	See appendix for calculations
42 & 43 14 & 15				See appendix for calculations
4 & 15	20.4	Dual 18	CHANNEL N-N CROSSING	See lot 14 & 15 culvert appendix calculations

WEIR SECTION ANALYSIS

MAJOR STORM (100-YR) SCENARIO

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

TYP. CONSERVATIVE WEIR

Trapezoidal Weir	Tra	pezo	idal	Weir
------------------	-----	------	------	------


Crest	= Sharp
Bottom Length (ft)	= 5.00
Total Depth (ft)	= 2.50
Side Slope (z:1)	= 3.00

Calculations

Weir Coeff. Cw	= 3.10
Compute by:	Known Q
Known Q (cfs)	= 5.00

Lia	hlia	hted
IIIY	IIIIY	meu


Depth (ft)	=	0.42
Q (cfs)	=	5.000
Area (sqft)	=	2.63
Velocity (ft/s)	=	1.90
Top Width (ft)	=	7.52

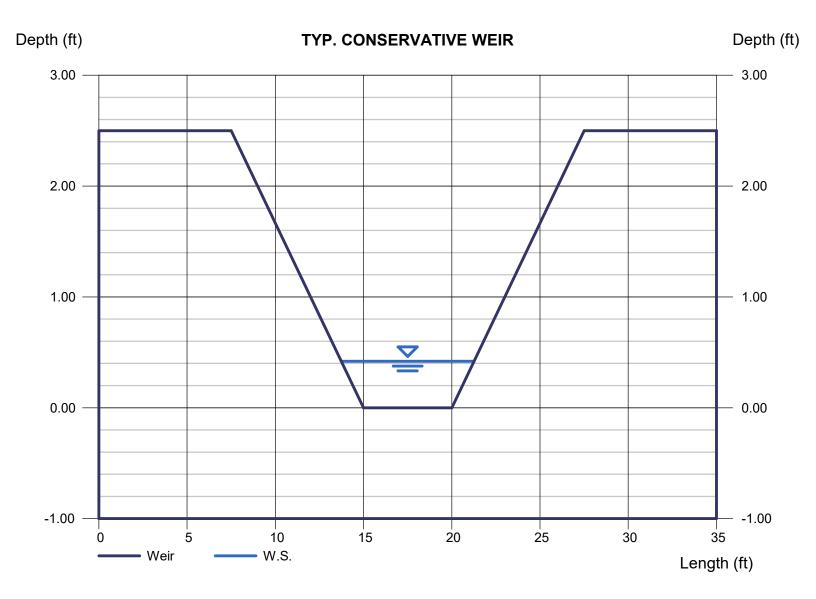

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

MODIFIED ROADSIDE DITCH WEIR CUT - LOTS 22-23

Trapezoidal Weir		Highlighted	
Crest	= Sharp	Depth (ft)	= 1.30
Bottom Length (ft)	= 22.00	Q (cfs)	= 114.00
Total Depth (ft)	= 3.00	Area (sqft)	= 33.67
Side Slope (z:1)	= 3.00	Velocity (ft/s)	= 3.39
		Top Width (ft)	= 29.80
Calculations			
Weir Coeff. Cw	= 3.10		
Compute by:	Known Q		
Known Q (cfs)	= 114.00		

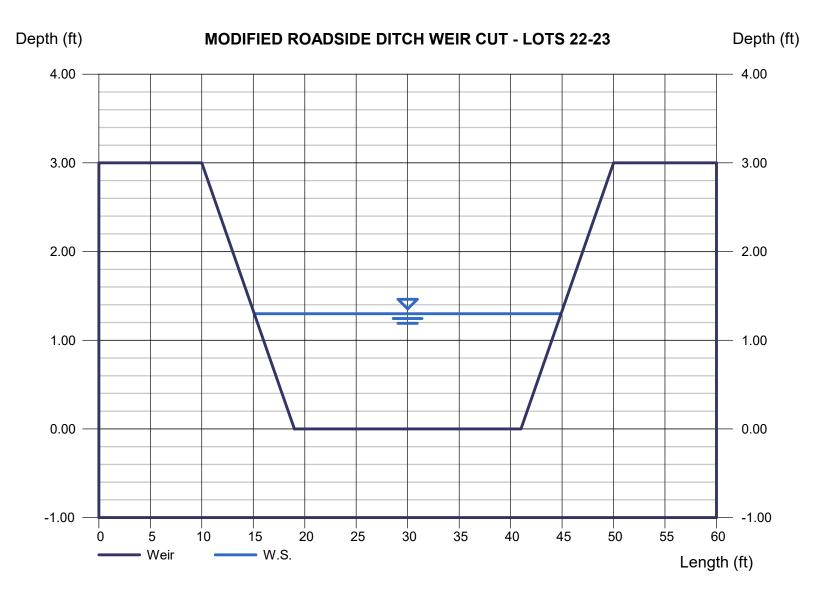

TRICKLE CHANNEL ANALYSIS

MAJOR STORM (100-YR) SCENARIO


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Friday, Mar 1 2024

COCNRETE TRICKLE CHANNEL POND A

Rectangular

Rectangular		Highlighted	
Bottom Width (ft)	= 2.00	Depth (ft)	= 0.20
Total Depth (ft)	= 0.50	Q (cfs)	= 1.350
		Area (sqft)	= 0.40
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.38
Slope (%)	= 1.00	Wetted Perim (ft)	= 2.40
N-Value	= 0.013	Crit Depth, Yc (ft)	= 0.25
		Top Width (ft)	= 2.00
Calculations		EGL (ft)	= 0.38
Compute by:	Known Q		
Known Q (cfs)	= 1.35		

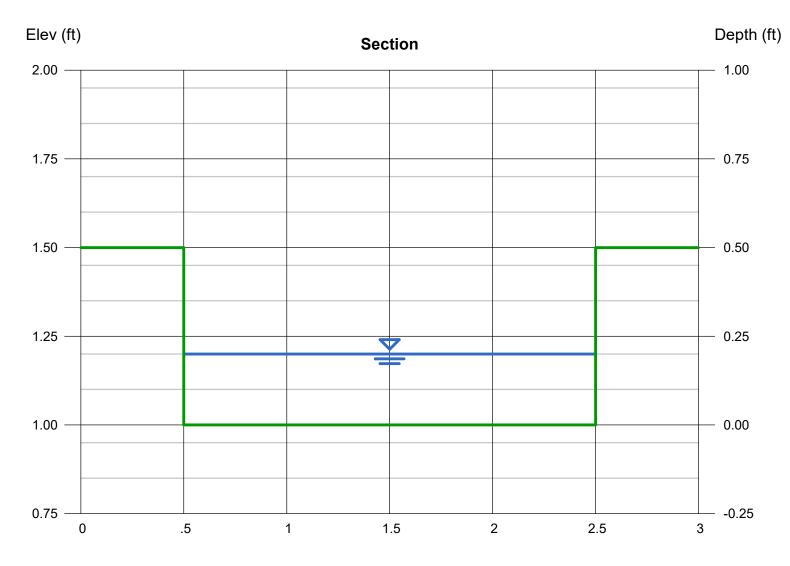


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Friday, Mar 1 2024

COCNRETE TRICKLE CHANNEL POND B

Rectangular

Rectangular		Highlighted	
Bottom Width (ft)	= 2.00	Depth (ft)	= 0.48
Total Depth (ft)	= 0.50	Q (cfs)	= 5.100
		Area (sqft)	= 0.96
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.31
Slope (%)	= 1.00	Wetted Perim (ft)	= 2.96
N-Value	= 0.013	Crit Depth, Yc (ft)	= 0.50
		Top Width (ft)	= 2.00
Calculations		EGL (ft)	= 0.92
Compute by:	Known Q		
Known Q (cfs)	= 5.10		

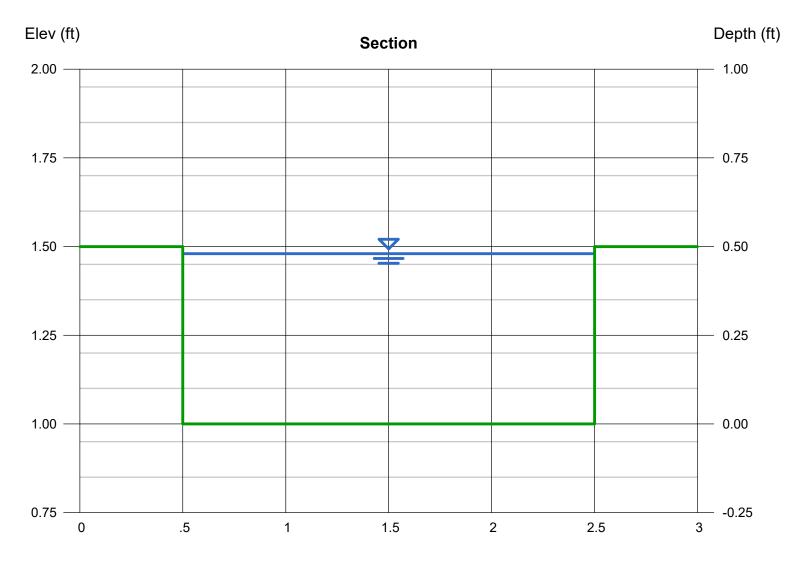

DRAINAGE CHANNEL SECTION CALCULATIONS

MAJOR (100-YR) STORM ANALYSIS

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

0.00

-0.50

22

SECTION A-A

1.00 -

0.50

0

2

4

6

8

= 4.00, 3.00 = 2.50	Highlighted Depth (ft) Q (cfs) Area (soft)	= 0.77 = 10.10 = 2.08
= 1.00 = 5.15 = 0.035	Velocity (ft/s) Wetted Perim (ft) Crit Depth, Yc (ft) Top Width (ft)	= 4.87 = 5.61
Known Q = 10.10	EGL (ft) Froude No.	= 1.14 = 1.38
- 10.10	Recommended BMP: North American Green Rollmax Permanent Turf Reinford P300 (or equiv.) Permissible Velocity (ft/s) = 9.0 Permissible Shear Stress (lb/ft^2)	
Se	ction	Depth (ft)
		3.00
		2.50
		2.00
		1.50
		1.00
		0.50
	= 2.50 = 1.00 = 5.15 = 0.035 Known Q = 10.10	 = 4.00, 3.00 = 2.50 = 1.00 = 5.15 = 0.035 = 10.10 Depth (ft) Q (cfs) Area (sqft) Velocity (ft/s) Wetted Perim (ft) Crit Depth, Yc (ft) Top Width (ft) EGL (ft) Froude No. = 10.10 Recommended BMP: North American Green Rollmax Permanent Turf Reinford P300 (or equiv.) Permissible Velocity (ft/s) = 9.0

Reach (ft)

12

14

16

18


20

10

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Wednesday, Feb 28 2024

SECTION AA-AA

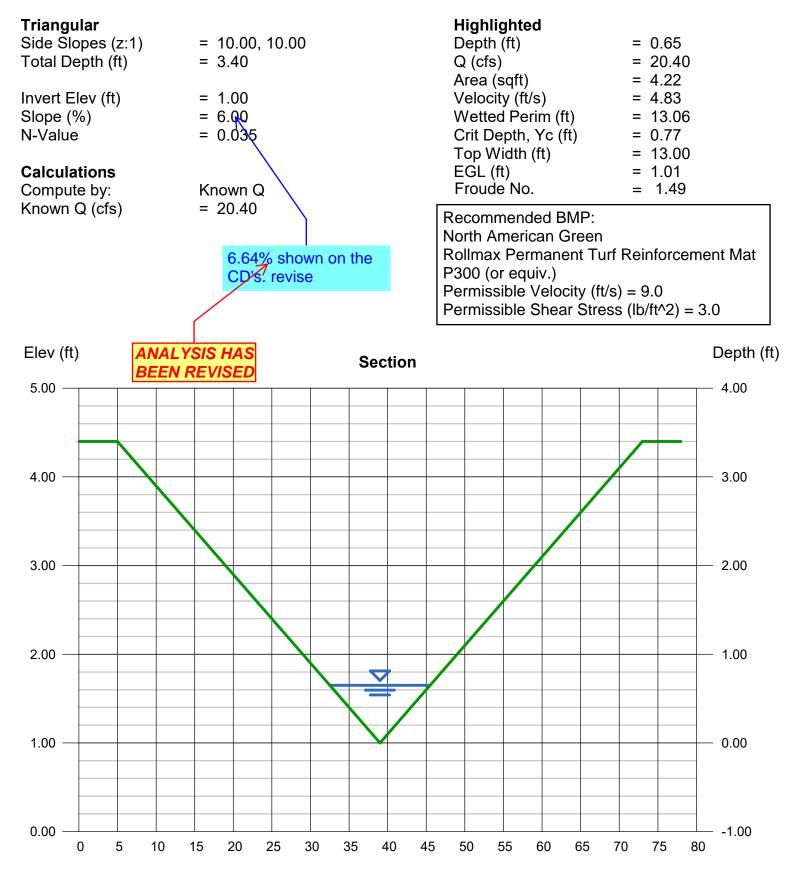


Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION B-B

Triangular		Highlighted		
Side Slopes (z:1)	= 4.00, 3.00	Depth (ft)	= 0.55	
Total Depth (ft)	= 2.50	Q (cfs)	= 4.100	
,		Area (sqft)	= 1.06	
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.87	
Slope (%)	= 5.15	Wetted Perim (ft)	= 4.01	
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.62	
		Top Width (ft)	= 3.85	
Calculations		EGL (ft)	= 0.78	
Compute by:	Known Q	Froude No.	= 1.30	
Known Q (cfs)	= 4.10			
		Recommended BMP:		
		North American Green		
		Rollmax Permanent Turf Rei	nforcement Ma	ıt 🛛
		P300 (or equiv.)		
		Permissible Velocity (ft/s) = 9	9.0	
		Permissible Shear Stress (lb	/ft^2) = 3.0	
Elev (ft)	Sec	ction		Depth (ft)
4.00				2.00

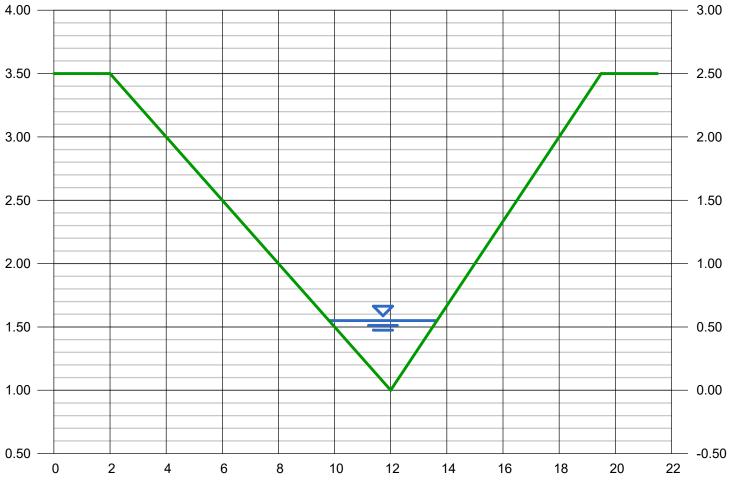

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.


Wednesday, Feb 28 2024

Section **BB-BB**

Triangular

Side Slopes (z:1)	= 5.00, 5.00
Total Depth (ft)	= 8.50
Invert Elev (ft)	= 1.00
Slope (%)	= 9.50
N-Value	= 0.035
Calculations Compute by: Known Q (cfs)	Known Q = 34.30


Highlighted		
Depth (ft)	= 0.94	
Q (cfs)	= 34.30	
Area (sqft)	= 4.42	
Velocity (ft/s)	= 7.76	
Wetted Perim (ft)	= 9.59	
Crit Depth, Yc (ft)	= 1.24	
Top Width (ft)	= 9.40	
EGL (ft)	= 1.88	
Froude No.	= 1.59	
Recommended BMP		
Rollmax Permanent Turf Reinforcement Mat		
TMAX (or equiv.)		
Permissible Velocity (ft/s) = 25.0		
Permissible Shear Stress (lb/ft^2) = 15.0		

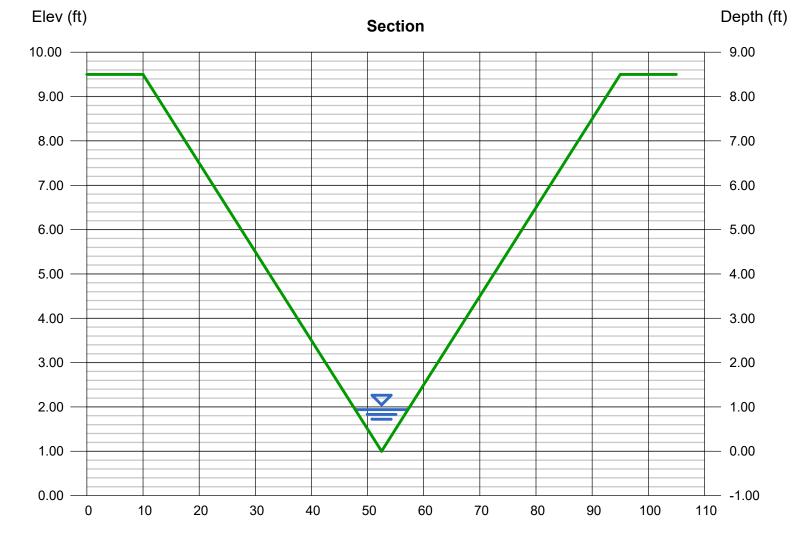

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION VIEW C-C

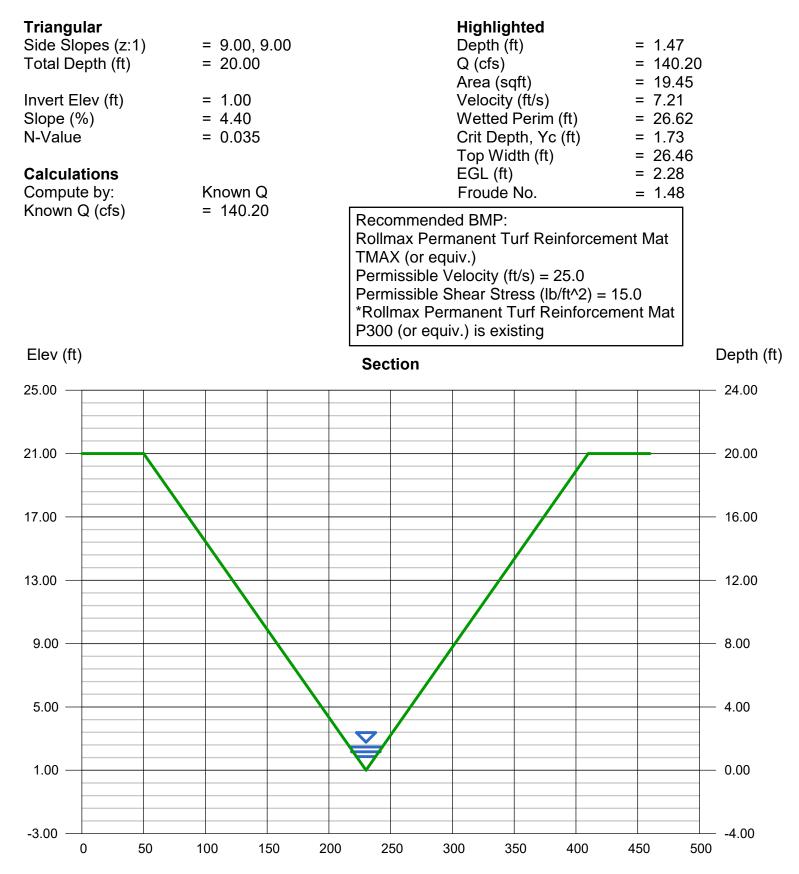


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Wednesday, Feb 28 2024

SECTION CC-CC

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 5.50, 34.00	Depth (ft)	= 0.66
Total Depth (ft)	= 1.80	Q (cfs)	= 34.30
		Area (sqft)	= 8.60
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.99
Slope (%)	= 4.00	Wetted Perim (ft)	= 26.14
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.72
		Top Width (ft)	= 26.07
Calculations		EGL (ft)	= 0.91
Compute by:	Known Q		
Known Q (cfs)	= 34.30		

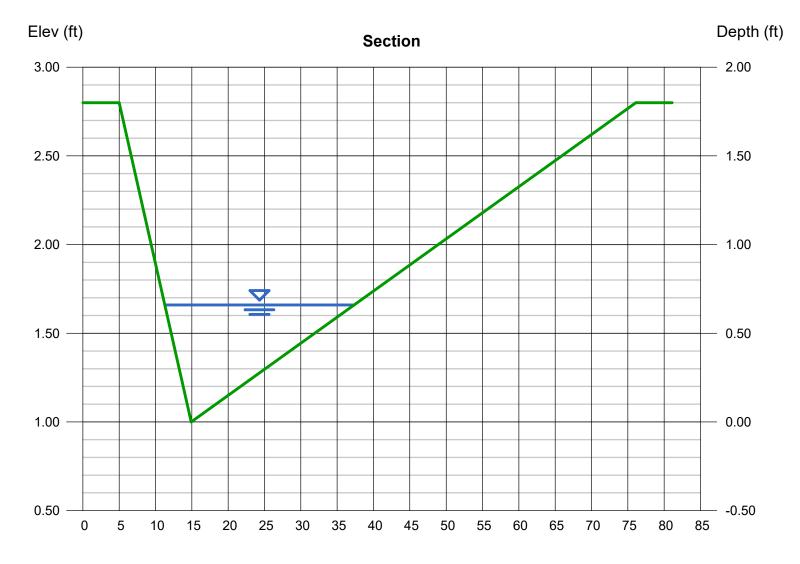

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

Depth (ft)


SECTION D-D LEFT SIDE

Triangular

Elev (ft)

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 6.00	Depth (ft)	= 1.03
Total Depth (ft)	= 6.00	Q (cfs)	= 34.30
		Area (sqft)	= 5.30
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 6.47
Slope (%)	= 5.80	Wetted Perim (ft)	= 10.51
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.24
		Top Width (ft)	= 10.30
Calculations		EGL (ft)	= 1.68
Compute by:	Known Q	Froude No.	= 1.59
Known Q (cfs)	= 34.30	Recommended BMP: Rollmax Permanent Turf Reinforcement Mat TMAX (or equiv.) Permissible Velocity (ft/s) = 25.0 Permissible Shear Stress (lb/ft^2) = 15.0	

Section

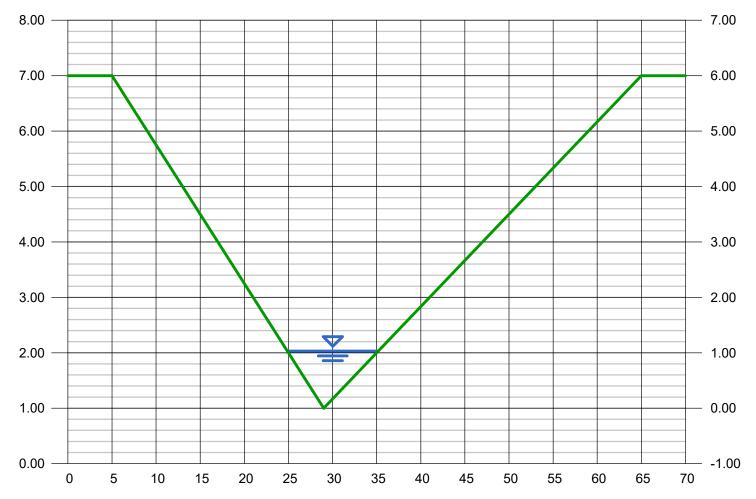

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.


Wednesday, Feb 28 2024

SECTION DD-DD

Triangular

Side Slopes (z:1)	= 13.00, 13.00
Total Depth (ft)	= 7.50
Invert Elev (ft)	= 1.00
Slope (%)	= 5.20
N-Value	= 0.035
Calculations Compute by: Known Q (cfs)	Known Q = 114.00

Highlighted		
Depth (ft)	= 1.15	
Q (cfs)	= 114.00	
Area (sqft)	= 17.19	
Velocity (ft/s)	= 6.63	
Wetted Perim (ft)	= 29.99	
Crit Depth, Yc (ft)	= 1.37	
Top Width (ft)	= 29.90	
EGL (ft)	= 1.83	
Froude No.	= 1.54	
Recommended BMP:		
Rollmax Permanent Turf Reinforcement Mat		
TMAX (or equiv.)		
Permissible Velocity (ft/s) = 25.0		
Permissible Shear Stress (lb/ft^2) = 15.0		

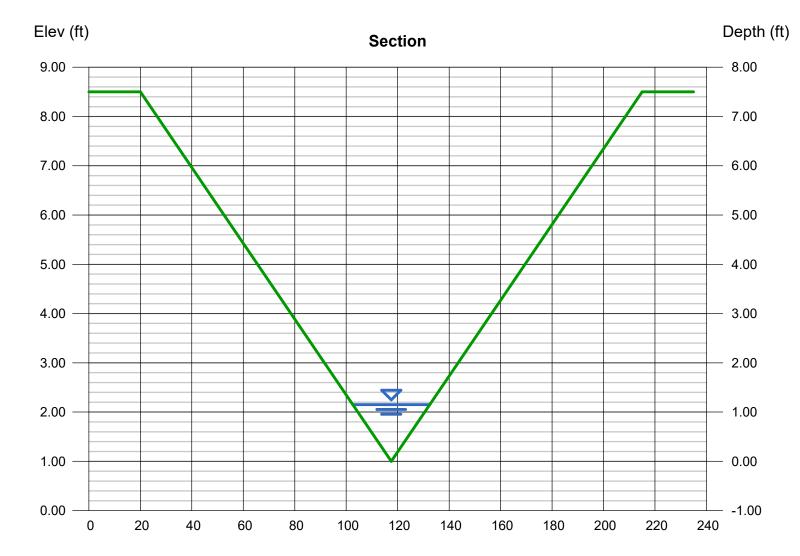


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION E-E

Trapezoidal Highlighted Bottom Width (ft) = 40.00 Depth (ft) Side Slopes (z:1) Q (cfs) = 20.00, 59.00 Total Depth (ft) Area (sqft) = 2.00 Velocity (ft/s) Invert Elev (ft) = 1.00 Slope (%) = 5.00 Wetted Perim (ft) N-Value = 0.035Crit Depth, Yc (ft) Top Width (ft) Calculations EGL (ft) Compute by: Known Q Froude No. Known Q (cfs) = 41.00 **Recommended BMP:** North American Green **Rollmax Permanent Turf Reinforcement Mat** P300 (or equiv.) Permissible Velocity (ft/s) = 9.0

Permissible Shear Stress (lb/ft^{2}) = 3.0

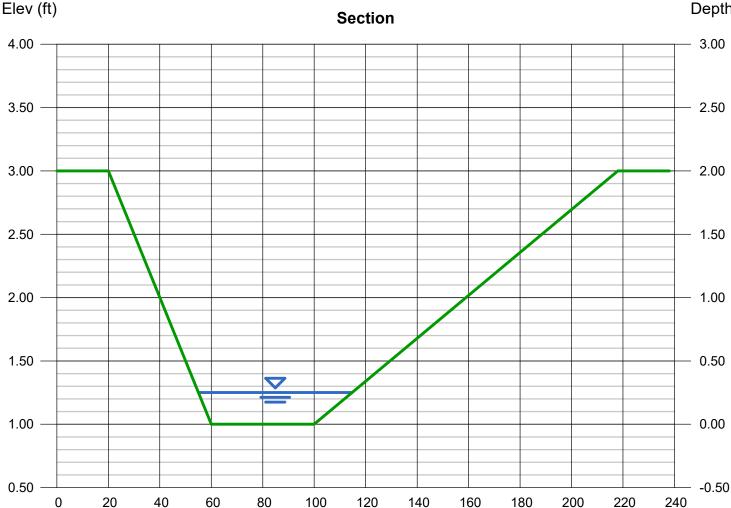

= 0.25

= 41.00

= 12.47

= 59.76

= 59.75

= 0.42

= 1.27

= 3.29

= 0.29

Tuesday, Jul 18 2023

Depth (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION F-F

Triangular Side Slopes (z

Elev (ft)		Section	Depth (ft)
		TMAX (or equ Permissible Vermissible	anent Turf Reinforcement Mat
Known Q (cfs)	= 41.00	Pasammanda	d PMD:
Compute by:	Known Q	Froude No	e. = 1.55
Calculations		EGL (ft)	= 1.66
		Top Width	(ft) = 12.48
N-Value	= 0.035	Crit Depth,	
Slope (%)	= 5.40	Wetted Pe	,
Invert Elev (ft)	= 1.00	Velocity (ft	
	- 10.07	Area (sqft)	
Total Depth (ft)	= 10.57	Q (cfs)	= 41.00
Side Slopes (z:1)	= 6.00, 6.00	Depth (ft)	= 1.04

Highlighted

13.00 -12.00 11.00 - 10.00 9.00 -- 8.00 7.00 -- 6.00 5.00 -4.00 3.00 -- 2.00 1.00 -- 0.00 -1.00 -2.00 0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150

Section

Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023


Depth (ft)

SECTION G-G

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 4.00	Depth (ft)	= 1.10
Total Depth (ft)	= 8.00	Q (cfs)	= 40.90
		Area (sqft)	= 4.84
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 8.45
Slope (%)	= 9.40	Wetted Perim (ft)	= 9.07
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.46
		Top Width (ft)	= 8.80
Calculations		EGL (ft)	= 2.21
Compute by:	Known Q	Froude No.	= 2.01
Known Q (cfs)	= 40.90		
		Recommended BMP:	
		Rollmax Permanent Turf Reinfo	prcement Mat
		TMAX (or equiv.)	
		Permissible Velocity (ft/s) = 25.	.0
		Permissible Shear Stress (lb/ft/	
		· · · · · · · · · · · · · · · · · · ·	,

Elev (ft)

Section

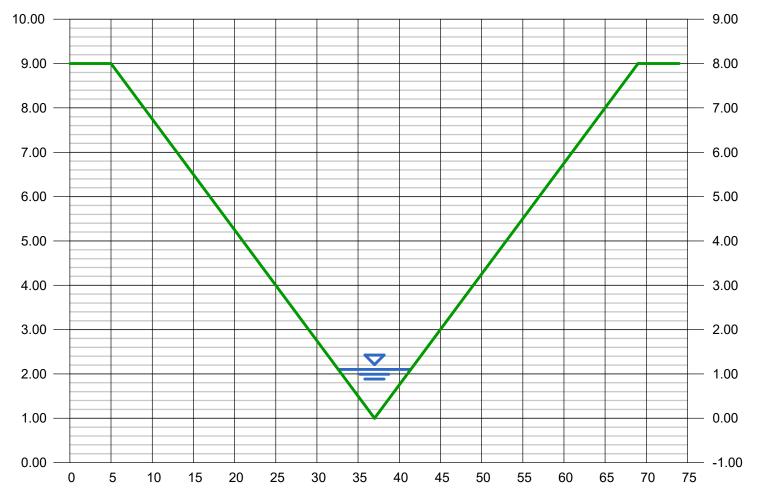


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION H-H

Triangular Highlighted Side Slopes (z:1) = 4.00, 3.00Depth (ft) = 0.90Total Depth (ft) = 2.50 Q (cfs) = 17.10 Area (sqft) = 2.83Velocity (ft/s) Invert Elev (ft) = 1.00 = 6.03 Slope (%) = 6.30 Wetted Perim (ft) = 6.56 N-Value Crit Depth, Yc (ft) = 0.035= 1.09 Top Width (ft) = 6.30 Calculations EGL (ft) = 1.47 Compute by: Known Q Froude No. = 1.59= 17.10 Known Q (cfs) **Recommended BMP:** North American Green **Rollmax Permanent Turf Reinforcement Mat** P300 (or equiv.) Permissible Velocity (ft/s) = 9.0

Permissible Shear Stress (lb/ft^2) = 3.0

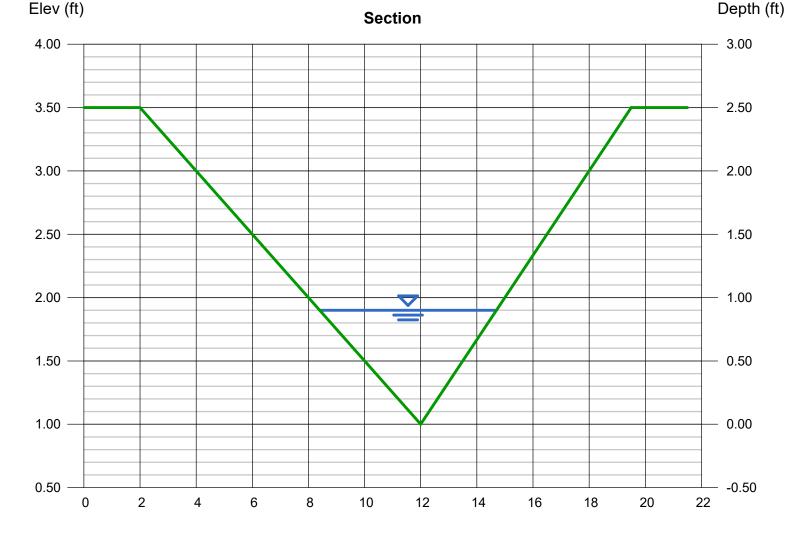


Friday, Jul 21 2023

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Friday, Jul 21 2023

SECTION I-I

Triangular				Highligh	nted			
Side Slopes (z:1)	= 4.00	, 3.00		Depth (ft	t)	=	0.95	
Total Depth (ft)	= 2.50)		Q (cfs)		=	19.60	
,				Arèa (sq	ft)	=	3.16	
Invert Elev (ft)	= 1.00)		Velocity		=	6.20	
Slope (%)	= 6.30)		Wetted F	Perim (ft)	=	6.92	
N-Value	= 0.03	5		Crit Dep	th, Yc (ft)	=	1.15	
				Top Wid	th (ft)	=	6.65	
Calculations				EGL (ft)	()	=	1.55	
Compute by:	Known	Q		Froude	No.	=	1.59	
Known Q (cfs)	= 19.6	60						
			R	ecommended	BMP:			
			N	orth American	Green			
			R	ollmax Perma	nent Turf	Reinford	ement N	1at
			P	300 (or equiv.)			
			Pe	ermissible Vel	ocity (ft/s) = 9.0		
			Pe	ermissible She	ear Stress	s (lb/ft^2)	= 3.0	
Elev (ft)			Section					Depth (ft)
4.00								2.00
4.00								— 3.00
	1	1 1	1 1		1	1		

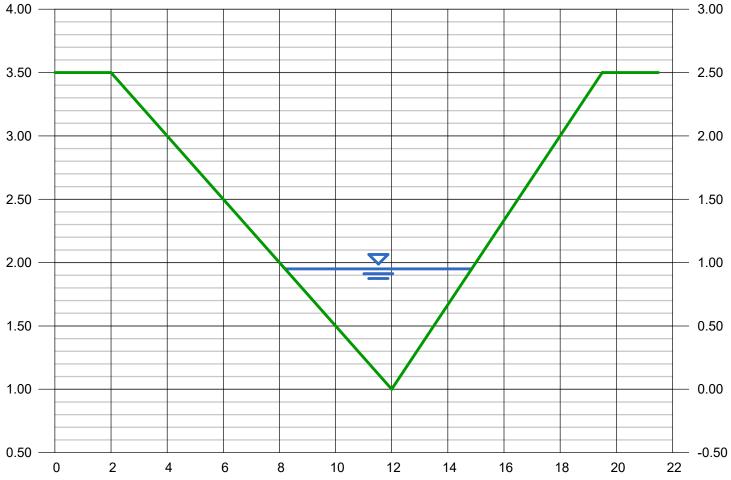

Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION J-J

Trapezoidal

Trapezoidal		Highlighted	
Bottom Width (ft)	= 40.00	Depth (ft)	= 0.48
Side Slopes (z:1)	= 7.00, 5.00	Q (cfs)	= 114.00
Total Depth (ft)	= 8.00	Area (sqft)	= 20.58
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.54
Slope (%)	= 5.00	Wetted Perim (ft)	= 45.84
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.62
		Top Width (ft)	= 45.76
Calculations		EGL (ft)	= 0.96
Compute by:	Known Q	Froude No.	= 1.46
Known Q (cfs)	= 114.00		
		Recommended BMP:	
		North American Green	
		Rollmax Permanent Turf Reir	forcement Mat
		P300 (or equiv.)	•
		Permissible Velocity (ft/s) = 9	.0

Permissible Shear Stress (lb/ft^2) = 3.0

Section

10.00 9.00 9.00 -8.00 8.00 -7.00 7.00 -- 6.00 6.00 -5.00 5.00 - 4.00 4.00 -- 3.00 3.00 -- 2.00 2.00 -1.00 \bigtriangledown 1.00 -- 0.00 0.00 -1.00 0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160

Depth (ft)

Elev (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION K-K RIGHT


Triangular

Side Slopes (z:1)	= 6.00, 8.00
Total Depth (ft)	= 6.00
Invert Elev (ft)	= 1.00
Slope (%)	= 10.70
N-Value	= 0.035
Calculations	

Compute by:	Known Q
Known Q (cfs)	= 114.00

Highlighted	
Depth (ft)	= 1.27
Q (cfs)	= 114.00
Area (sqft)	= 11.29
Velocity (ft/s)	= 10.10
Wetted Perim (ft)	= 17.96
Crit Depth, Yc (ft)	= 1.76
Top Width (ft)	= 17.78
EGL (ft)	= 2.86
Froude No.	= 2.23

Recommended BMP: Rollmax Permanent Turf Reinforcement Mat TMAX (or equiv.) Permissible Velocity (ft/s) = 25.0 Permissible Shear Stress (lb/ft^2) = 15.0

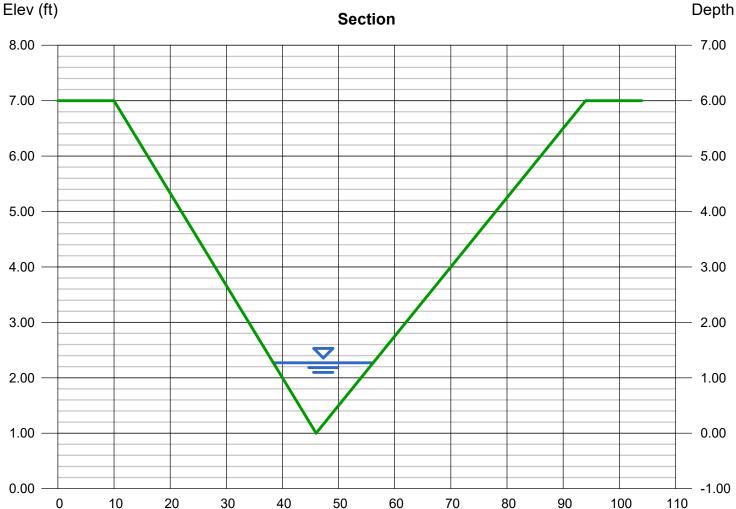

Reach (ft)

Tuesday, Jul 18 2023

Depth (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Jul 27 2023

Depth (ft)

SECTION L-L

Elev (ft)

Trapezoidal Bottom Width (ft) Side Slopes (z:1) Total Depth (ft) Invert Elev (ft) Slope (%) N-Value	= 11.58 = 3.00, 3.00 = 4.25 = 1.00 = 3.00 = 0.035	Highlighted Depth (ft) Q (cfs) Area (sqft) Velocity (ft/s) Wetted Perim (ft) Crit Depth, Yc (ft) Top Width (ft)	= 1.12 = 114.00 = 16.73 = 6.81 = 18.66 = 1.29 = 18.30
Calculations Compute by:	Known Q	EGL (ft) Froude No.	= 1.84 = 1.26
Known Q (cfs)	= 114.00	Recommended BMP: North American Green Rollmax Permanent Turf Rei P300 (or equiv.) Permissible Velocity (ft/s) = 9 Permissible Shear Stress (lb	9.0

Section

6.00 -5.00 5.00 -- 4.00 4.00 -- 3.00 3.00 -- 2.00 ∇ 2.00 -- 1.00 1.00 -- 0.00 0.00 -1.00 0 5 25 50 10 15 20 30 35 40 45

Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 25 2023

SECTION M-M


Trapezoidal Bottom Width (ft) Side Slopes (z:1) Total Depth (ft) Invert Elev (ft) Slope (%) N-Value	= 4.88	Highlighted Depth (ft) Q (cfs) Area (sqft) Velocity (ft/s) Wetted Perim (ft) Crit Depth, Yc (ft) Top Width (ft)	= 1.48
Calculations Compute by:	Known Q	EGL (ft) Froude No.	= 2.11 = 1.28
Known Q (cfs)		Recommended BMP: North American Green Rollmax Permanent Turf Reint P300 (or equiv.) Permissible Velocity (ft/s) = 9.0 Permissible Shear Stress (lb/ft	forcement Mat 0
Elev (ft)	Se	ection	Depth (ft)
6.00			5.00
5.00			4.00
4.00			3.00
3.00			2.00
2.00		-	1.00
1.00			0.00
0.00 0 5	10 15 20 25	30 35 40 45	-1.00 50 55

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Monday, Nov 13 2023

SECTION N-N

Triangular		Highlighted	
Side Slopes (z:1)	= 11.00, 24.00	Depth (ft)	= 0.83
Total Depth (ft)	= 1.70	Q (cfs)	= 73.40
		Area (sqft)	= 12.06
Invert Elev (ft)	= 7446.19	Velocity (ft/s)	= 6.09
Slope (%)	= 6.70	Wetted Perim (ft)	= 29.10
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.02
		Top Width (ft)	= 29.05
Calculations		EGL (ft)	= 1.41
Compute by:	Known Q		
Known Q (cfs)	= 73.40		

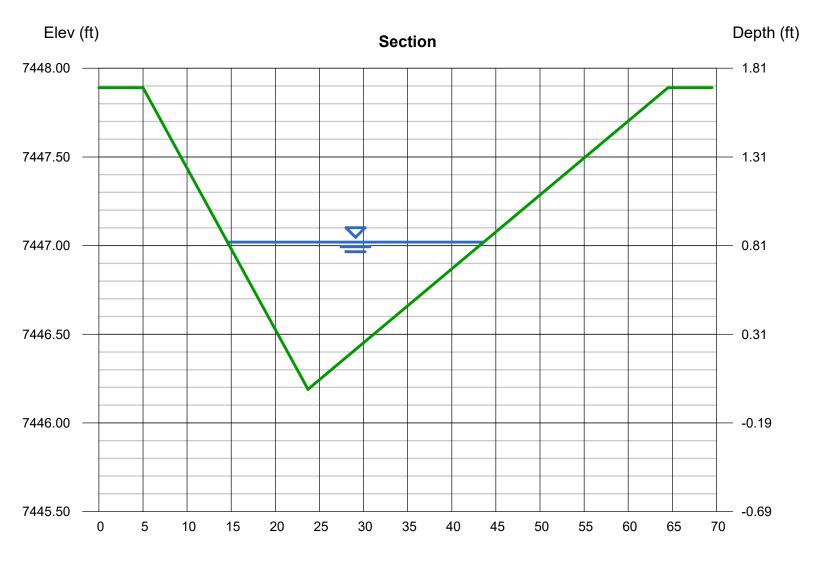

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION O-O

Trapezoidal

Elev (ft)

Trapezoidal Bottom Width (ft) Side Slopes (z:1) Total Depth (ft) Invert Elev (ft) Slope (%) N-Value Calculations	= 15.00 = 4.00, 5.00 = 12.00 = 1.00 = 5.30 = 0.035	Highlighted Depth (ft) Q (cfs) Area (sqft) Velocity (ft/s) Wetted Perim (ft) Crit Depth, Yc (ft) Top Width (ft) EGL (ft)	= 0.64 = 73.40 = 11.44 = 6.41 = 20.90 = 0.84 = 20.76 = 1.28
Calculations Compute by: Known Q (cfs)	Known Q = 73.40	,	= 1.28 = 1.52

Section

15.00 -14.00 13.00 -- 12.00 11.00 -- 10.00 9.00 -8.00 7.00 -6.00 5.00 -4.00 3.00 -- 2.00 1.00 -- 0.00 -1.00 -2.00 40 0 10 20 30 50 60 70 80 90 100 110 120 130 140 150

Tuesday, Jul 18 2023

Depth (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Known Q

= 40.00

Tuesday, Jul 18 2023

= 1.47

SECTION P-P

Triangular

Side Slopes (z:1)	= 5.00, 7.00
Total Depth (ft)	= 15.00
Invert Elev (ft)	= 1.00
Slope (%)	= 5.10
N-Value	= 0.035
Calculations	


Compute by:

Known Q (cfs)

Highlighted		
Depth (ft)	=	1.05
Q (cfs)	=	40.00
Area (sqft)	=	6.61
Velocity (ft/s)	=	6.05
Wetted Perim (ft)	=	12.78
Crit Depth, Yc (ft)	=	1.23
Top Width (ft)	=	12.60
EGL (ft)	=	1.62

Froude No.

Recommended BMP: Rollmax Permanent Turf Reinforcement Mat TMAX (or equiv.) Permissible Velocity (ft/s) = 25.0 Permissible Shear Stress (lb/ft^2) = 15.0

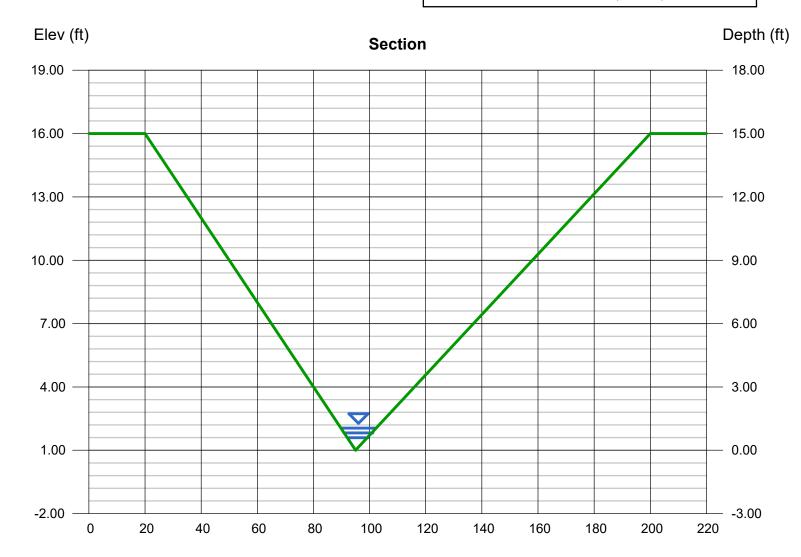

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 25 2023

Depth (ft)

SECTION Q-Q

Elev (ft)

Trapezoidal		Highlighted	
Bottom Width (ft)	= 11.80	Depth (ft)	= 0.92
Side Slopes (z:1)	= 3.00, 3.00	Q (cfs)	= 114.00
Total Depth (ft)	= 4.25	Area (sqft)	= 13.40
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 8.51
Slope (%)	= 6.00	Wetted Perim (ft)	= 17.62
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.28
		Top Width (ft)	= 17.32
Calculations		EGL (ft)	= 2.05
Compute by:	Known Q	Froude No.	= 1.71
Known Q (cfs)	= 114.00		
		Recommended BMP:	
		North American Green	
		Rollmax Permanent Turf Re	einforcement Mat
		P300 (or equiv.)	
		Permissible Velocity (ft/s) =	9.0
		Permissible Shear Stress (II	
		Fermissible Shear Stress (ii	$0/10^{2} = 3.0$

Section

6.00 -5.00 5.00 -- 4.00 4.00 -- 3.00 3.00 -- 2.00 ∇ 2.00 -- 1.00 1.00 -- 0.00 0.00 -1.00 0 5 25 50 10 15 20 30 35 40 45

Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 25 2023

SECTION R-R

Trapezoidal Bottom Width (ft) Side Slopes (z:1) Total Depth (ft) Invert Elev (ft) Slope (%) N-Value Calculations Compute by: Known Q (cfs)	= = = Kr	8.00 4.00, 3.00 3.25 1.00 6.00 0.035)		Dep Q (c Area Velc Wet Crit Top EGL Fro	a (sqft) ocity (ft/s) tted Perim (Depth, Yc Width (ft) (ft) ude No.	(ft) (ft)	= 0.73	
					North Am Rollmax F P300 (or e Permissib	ended BMF erican Gree Permanent equiv.) Ile Velocity Ile Shear S	en Turf Reinf (ft/s) = 9.0)	vlat
Elev (ft)				Sectio	n				Depth (ft)
5.00									- 4.00
4.00								-	— 3.00
3.00									— 2.00
2.00									— 1.00
1.00									— 0.00
0.00	5 1	10 1	5	20	25	30 3	35 4		— -1.00

Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 25 2023


Depth (ft)

SECTION S-S

Elev (ft)

Trapezoidal		Highlighted	
Bottom Width (ft)	= 6.00	Depth (ft)	= 0.50
Side Slopes (z:1)	= 4.00, 3.00	Q (cfs)	= 20.40
Total Depth (ft)	= 2.75	Area (sqft)	= 3.87
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.26
Slope (%)	= 5.50	Wetted Perim (ft)	= 9.64
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.63
		Top Width (ft)	= 9.50
Calculations		EGL (ft)	= 0.93
Compute by:	Known Q	Froude No.	= 1.45
Known Q (cfs)	= 20.40		
		Recommended BMP:	
		North American Green	
		Rollmax Permanent Turf Re	inforcement Mat
		P300 (or equiv.)	
		Permissible Velocity (ft/s) =	
		Permissible Shear Stress (Ib	o/ft^2) = 3.0

Section

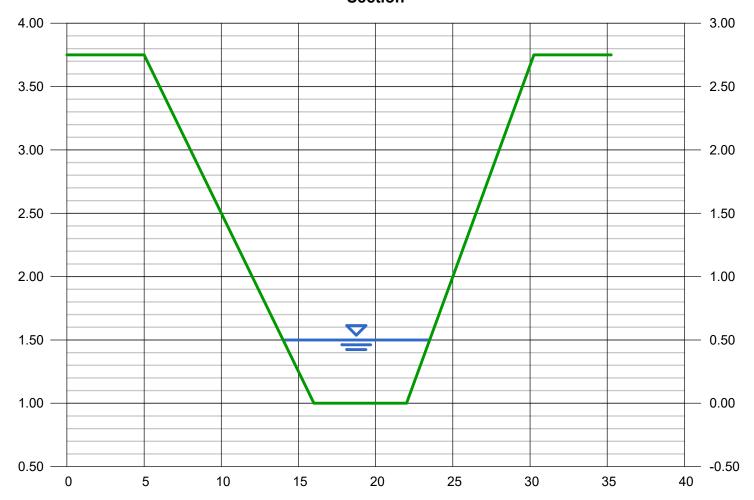


Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Monday, Nov 13 2023

SECTION T-T

Triangular		Highlighted	
Side Slopes (z:1)	= 11.00, 18.00	Depth (ft)	= 0.94
Total Depth (ft)	= 1.50	Q (cfs)	= 73.40
		Area (sqft)	= 12.81
Invert Elev (ft)	= 7469.41	Velocity (ft/s)	= 5.73
Slope (%)	= 5.20	Wetted Perim (ft)	= 27.33
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.10
		Top Width (ft)	= 27.26
Calculations		EGL (ft)	= 1.45
Compute by:	Known Q		
Known Q (cfs)	= 73.40		

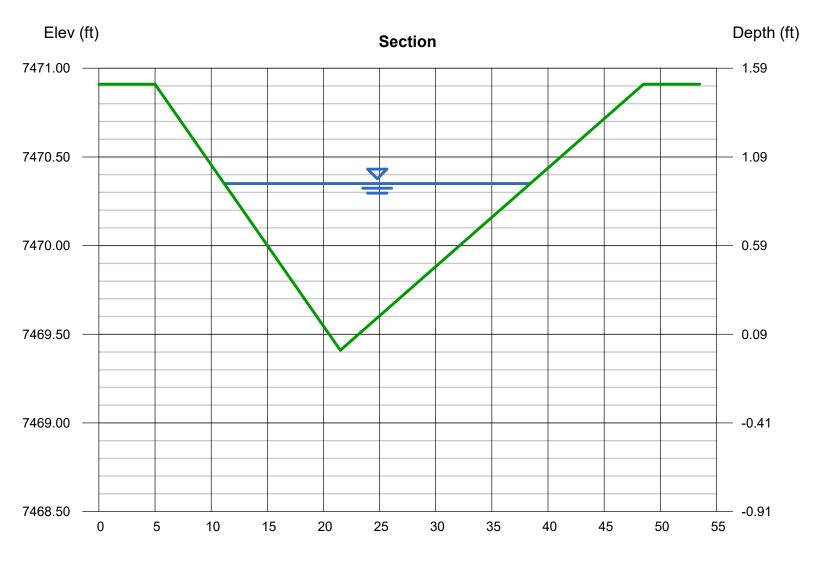

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024


SECTION U-U

Triangular

Side Slopes (z:1)	= 7.60, 13.20	Depth (ft)	= 0.43	
Total Depth (ft)	= 5.50	Q (cfs)	= 7.600	
		Area (sqft)	= 1.92	
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.95	
Slope (%)	= 7.10	Wetted Perim (ft)	= 8.99	
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.51	
		Top Width (ft)	= 8.94	
Calculations		EGL (ft)	= 0.67	
Compute by:	Known Q	Froude No.	= 1.5	
Known Q (cfs)	= 7.60	Recommended BMP: North American Green Rollmax Permanent Turf Reinforcement Mat P300 (or equiv.) Permissible Velocity (ft/s) = 9.0		

Permissible Shear Stress (lb/ft^2) = 3.0

Highlighted

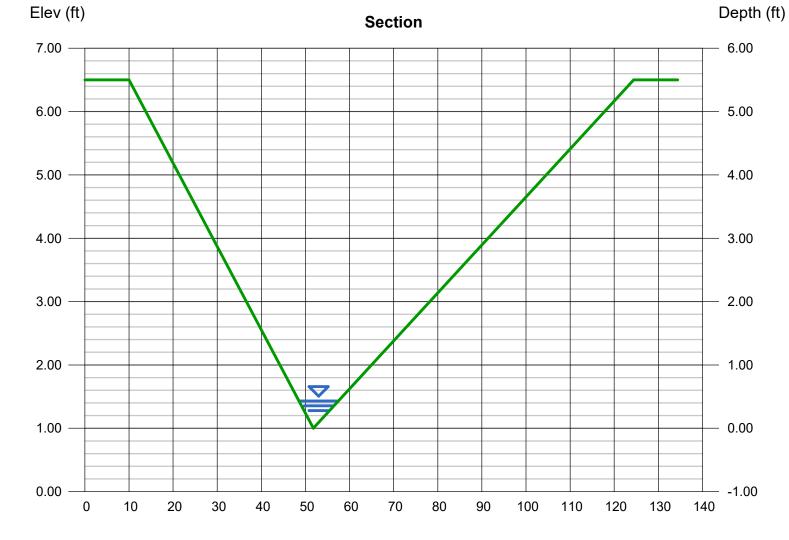

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

Depth (ft)


SECTION V-V

Triangular

Elev (ft)

Triangular		Highlighted	
Side Slopes (z:1)	= 6.00, 6.00	Depth (ft)	= 1.50
Total Depth (ft)	= 1.50	Q (cfs)	= 108.94
		Area (sqft)	= 13.50
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 8.07
Slope (%)	= 5.40	Wetted Perim (ft)	= 18.25
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.50
		Top Width (ft)	= 18.00
Calculations		EGL (ft)	= 2.51
Compute by:	Q vs Depth	Froude No.	= 1.12
No. Increments	= 1	Recommended BMP: North American Green Rollmax Permanent Turf Reinforcement P300 (or equiv.) Permissible Velocity (ft/s) = 9.0 Permissible Shear Stress (lb/ft^2) = 3.0	

Section

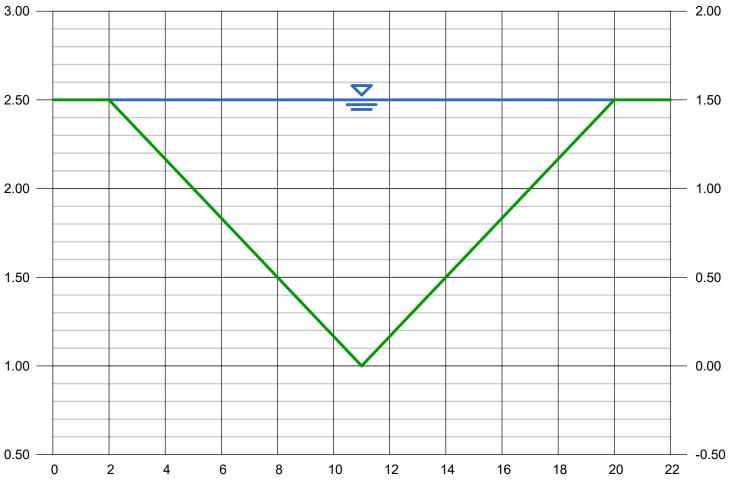

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION W-W

Triangular

Invert Elev (ft)

Calculations


Compute by:


Known Q (cfs)

Slope (%)

N-Value

Elev (ft)

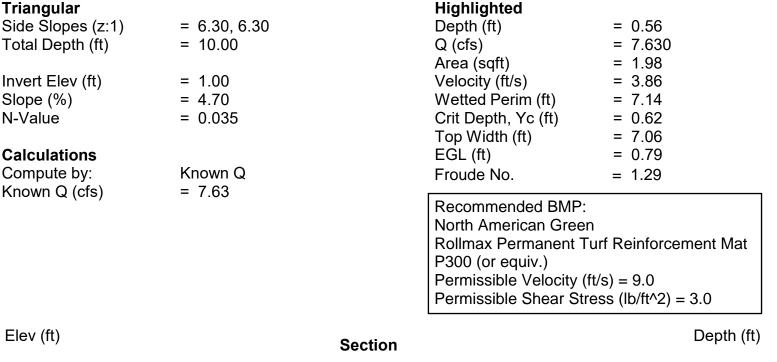

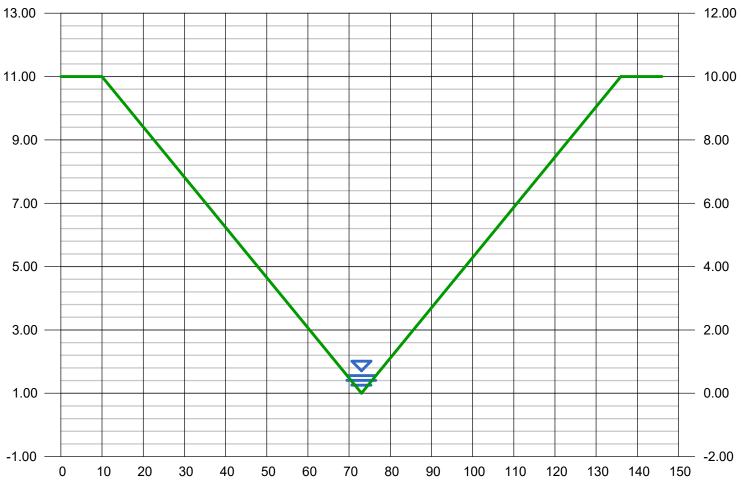

Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

Depth (ft)

SECTION X-X


Triangular

Elev (ft)

Side Slopes (z:1)	= 8.50, 8.50	Depth (ft)	= 0.47
Total Depth (ft)	= 9.00	Q (cfs)	= 7.600
,		Area (sqft)	= 1.88
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.05
Slope (%)	= 6.70	Wetted Perim (ft)	= 8.05
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.55
		Top Width (ft)	= 7.99
Calculations		EGL (ft)	= 0.72
Compute by:	Known Q	Froude No.	= 1.47
Known Q (cfs)	= 7.60	Recommended BMP: North American Green Rollmax Permanent Tu P300 (or equiv.) Permissible Velocity (fr Permissible Shear Stree	urf Reinforcement Mat t/s) = 9.0

Highlighted

Section

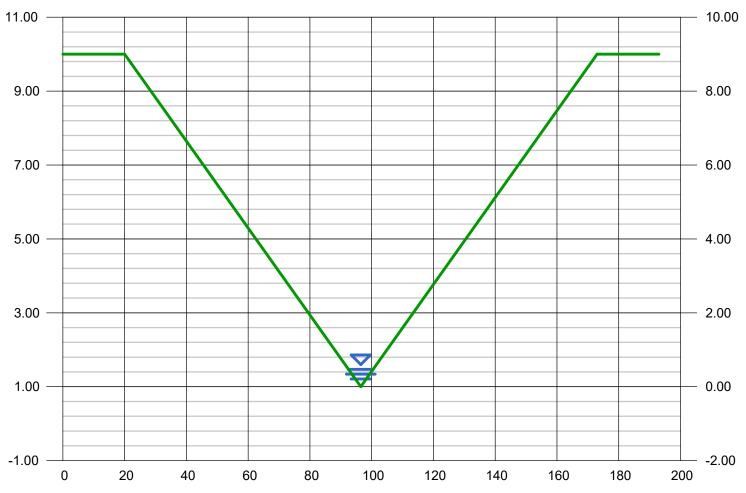

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

Depth (ft)

SECTION Y-Y

Trapezoidal Bottom Width (ft) = 52.00 Side Slopes (z:1) = 6.00, 6.00Total Depth (ft) = 5.00 Invert Elev (ft) = 1.00 Slope (%) = 5.70 N-Value = 0.035 Calculations Compute by: Known Q = 39.70 Known Q (cfs)

Highlighted	
Depth (ft)	= 0.22
Q (cfs)	= 39.70
Area (sqft)	= 11.73
Velocity (ft/s)	= 3.38
Wetted Perim (ft)	= 54.68
Crit Depth, Yc (ft)	= 0.27
Top Width (ft)	= 54.64
EGL (ft)	= 0.40
Froude No.	= 1.29

Recommended BMP: North American Green Rollmax Permanent Turf Reinforcement Mat P300 (or equiv.) Permissible Velocity (ft/s) = 9.0 Permissible Shear Stress (lb/ft^2) = 3.0

Elev (ft)


Section

7.00 -6.00 6.00 -- 5.00 5.00 -- 4.00 4.00 -- 3.00 3.00 -- 2.00 2.00 -- 1.00 1.00 -- 0.00 0.00 -1.00 0 10 20 30 40 50 60 70 80 90 100 110 120 130 140

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

SECTION Z-Z

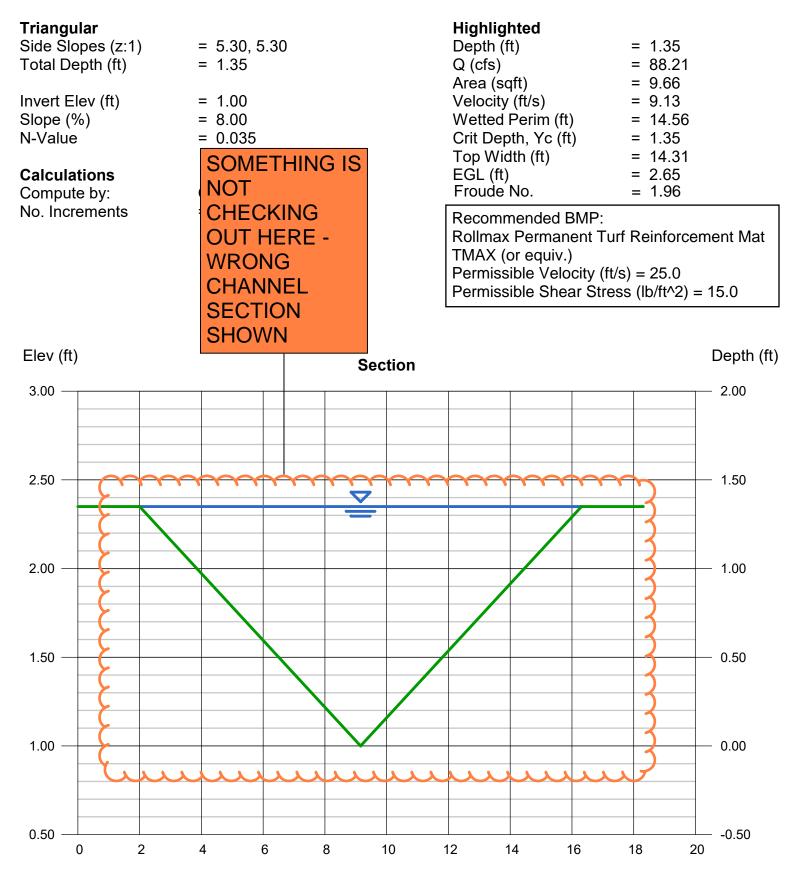

Reach (ft)

DRAINAGE CHANNEL SECTION CALCULATIONS


MINOR (5-YR) STORM ANALYSIS

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION A-A

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 3.00	Depth (ft)	= 0.46
Total Depth (ft)	= 2.50	Q (cfs)	= 2.500
		Area (sqft)	= 0.74
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.38
Slope (%)	= 5.15	Wetted Perim (ft)	= 3.35
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.51
		Top Width (ft)	= 3.22
Calculations		EGL (ft)	= 0.64
Compute by:	Known Q		
Known Q (cfs)	= 2.50		

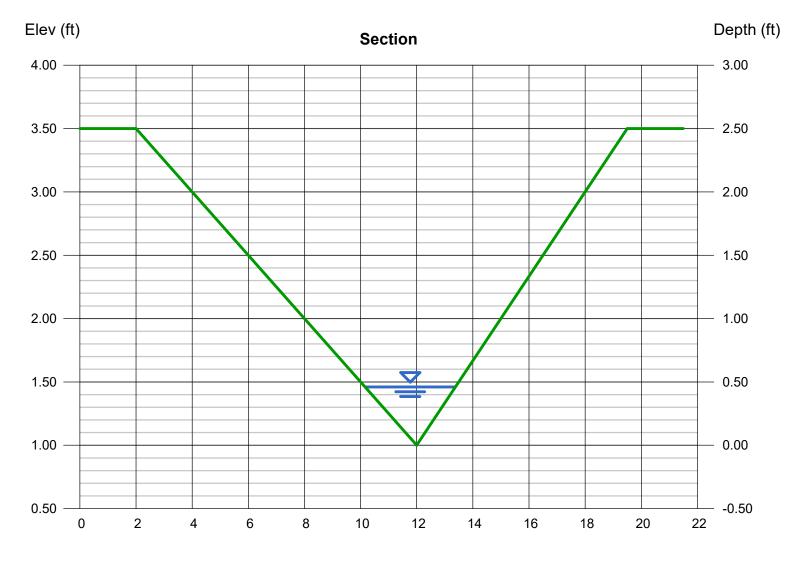


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Feb 29 2024

SECTION AA-AA

Triangular		Highlighted	
Side Slopes (z:1)	= 10.00, 10.00	Depth (ft)	= 0.39
Total Depth (ft)	= 3.40	Q (cfs)	= 5.000
,		Area (sqft)	= 1.52
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.29
Slope (%)	= 6.00	Wetted Perim (ft)	= 7.84
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.44
		Top Width (ft)	= 7.80
Calculations		EGL (ft)	= 0.56
Compute by:	Known Q		
Known Q (cfs)	= 5.00		

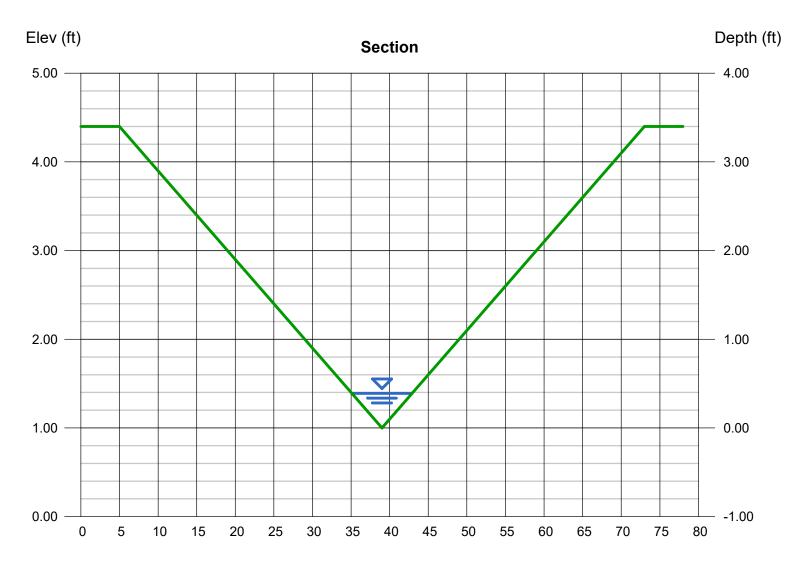


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION B-B

	Highlighted	
= 4.00, 3.00	Depth (ft)	= 0.44
= 2.50	Q (cfs)	= 2.300
	Area (sqft)	= 0.68
= 1.00	Velocity (ft/s)	= 3.39
= 5.15	Wetted Perim (ft)	= 3.21
= 0.035	Crit Depth, Yc (ft)	= 0.49
	Top Width (ft)	= 3.08
	EGL (ft)	= 0.62
Known Q		
= 2.30		
	= 2.50 = 1.00 = 5.15 = 0.035 Known Q	= 4.00, 3.00 Depth (ft) = 2.50 Q (cfs) Area (sqft) = 1.00 Velocity (ft/s) = 5.15 Wetted Perim (ft) = 0.035 Crit Depth, Yc (ft) Top Width (ft) EGL (ft)

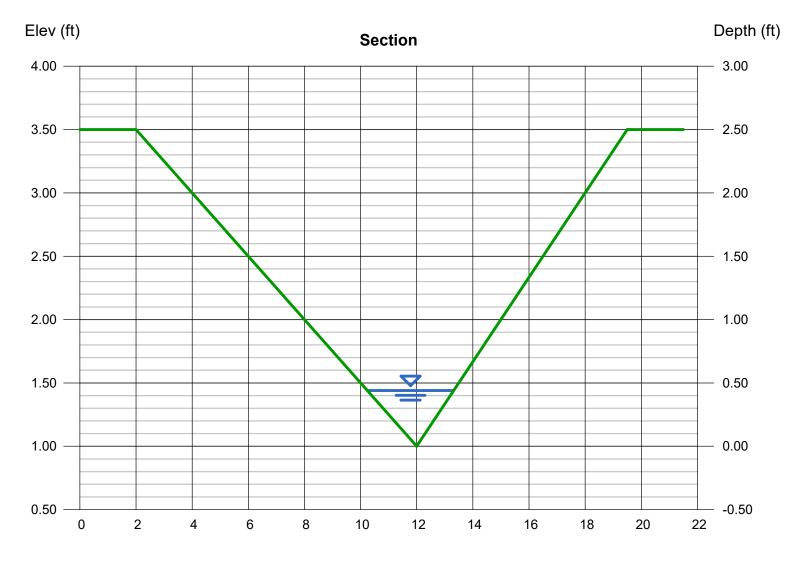


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Feb 29 2024

Section BB-BB

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 5.00, 5.00	Depth (ft)	= 0.56
Total Depth (ft)	= 8.50	Q (cfs)	= 8.500
		Area (sqft)	= 1.57
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.42
Slope (%)	= 9.50	Wetted Perim (ft)	= 5.71
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.71
		Top Width (ft)	= 5.60
Calculations		EGL (ft)	= 1.02
Compute by:	Known Q		
Known Q (cfs)	= 8.50		

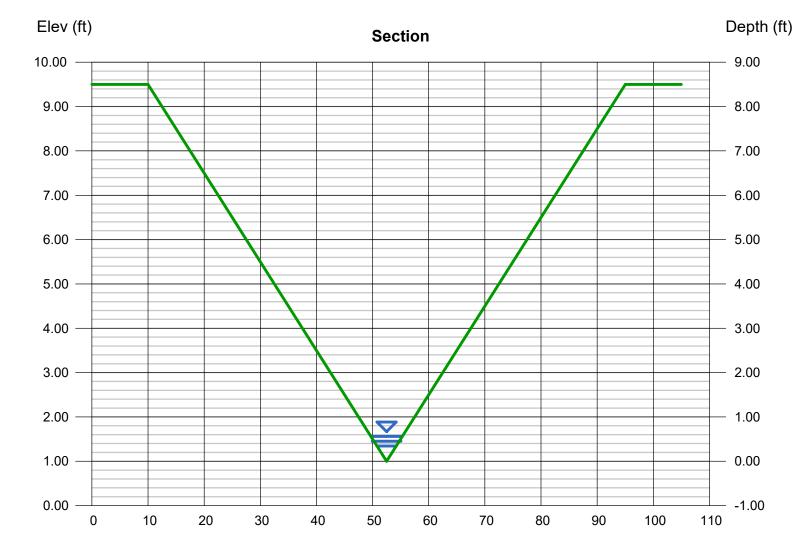


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION VIEW C-C

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 9.00, 9.00	Depth (ft)	= 0.83
Total Depth (ft)	= 20.00	Q (cfs)	= 30.50
		Area (sqft)	= 6.20
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.92
Slope (%)	= 4.40	Wetted Perim (ft)	= 15.03
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.94
		Top Width (ft)	= 14.94
Calculations		EGL (ft)	= 1.21
Compute by:	Known Q		
Known Q (cfs)	= 30.50		

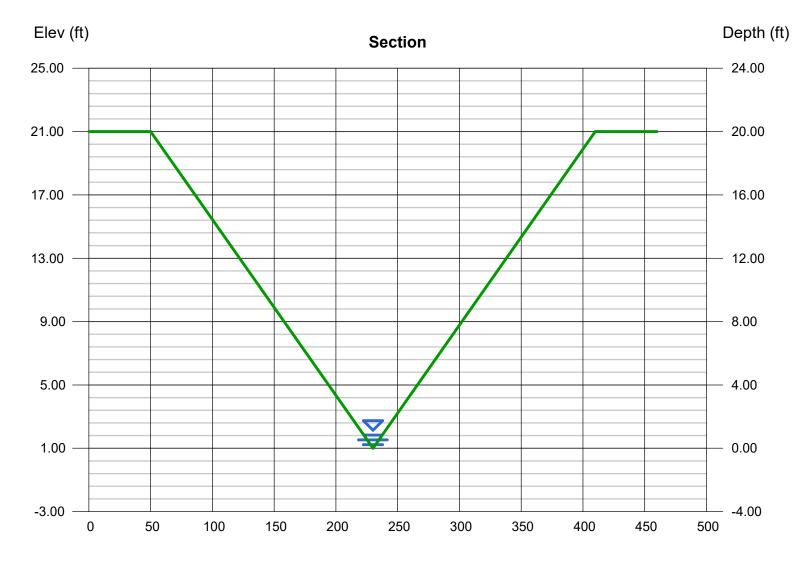


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Feb 29 2024

SECTION CC-CC

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 5.50, 34.00	Depth (ft)	= 0.39
Total Depth (ft)	= 1.80	Q (cfs)	= 8.500
		Area (sqft)	= 3.00
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 2.83
Slope (%)	= 4.00	Wetted Perim (ft)	= 15.45
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.41
		Top Width (ft)	= 15.41
Calculations		EGL (ft)	= 0.51
Compute by:	Known Q		
Known Q (cfs)	= 8.50		

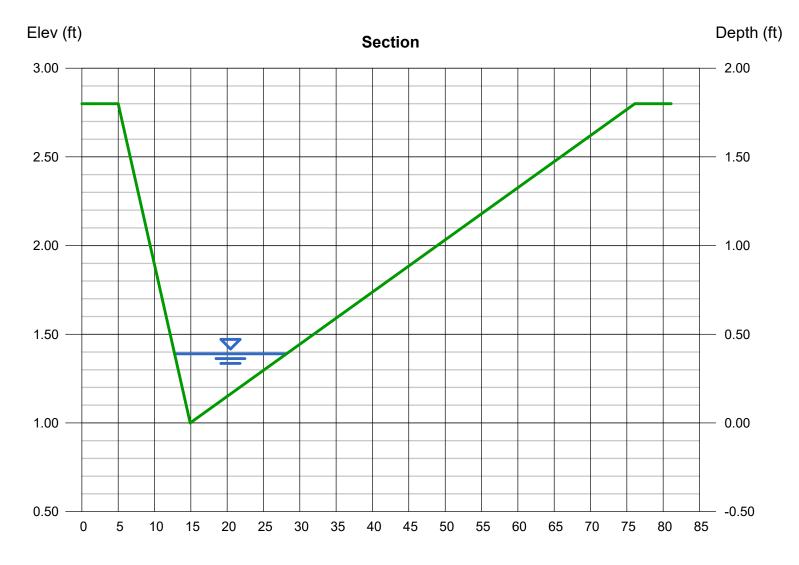


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION D-D LEFT SIDE

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 6.00	Depth (ft)	= 0.61
Total Depth (ft)	= 6.00	Q (cfs)	= 8.500
		Area (sqft)	= 1.86
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.57
Slope (%)	= 5.80	Wetted Perim (ft)	= 6.23
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.71
		Top Width (ft)	= 6.10
Calculations		EGL (ft)	= 0.93
Compute by:	Known Q		
Known Q (cfs)	= 8.50		

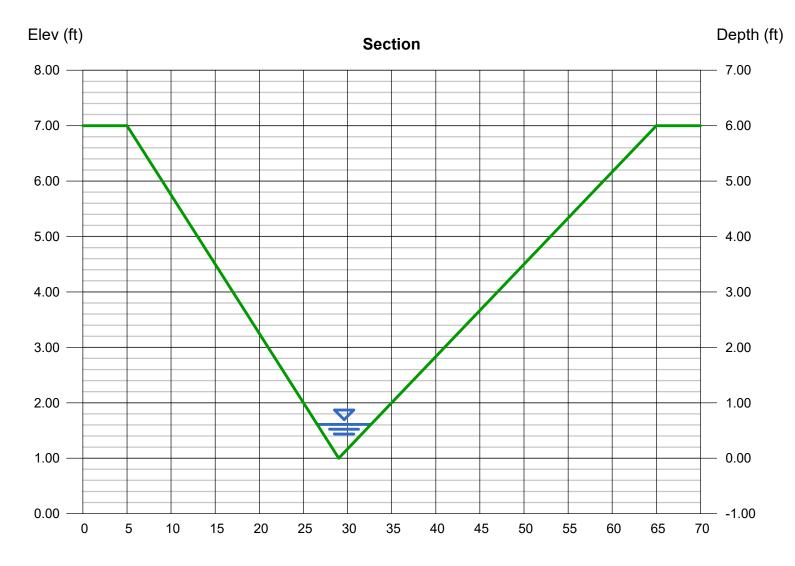


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Feb 29 2024

SECTION DD-DD


Triangular		Highlighted	
Side Slopes (z:1)	= 13.00, 13.00	Depth (ft)	= 0.70
Total Depth (ft)	= 7.50	Q (cfs)	= 29.70
		Area (sqft)	= 6.37
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.66
Slope (%)	= 5.20	Wetted Perim (ft)	= 18.25
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.80
		Top Width (ft)	= 18.20
Calculations		EGL (ft)	= 1.04
Compute by:	Known Q		
Known Q (cfs)	= 29.70		

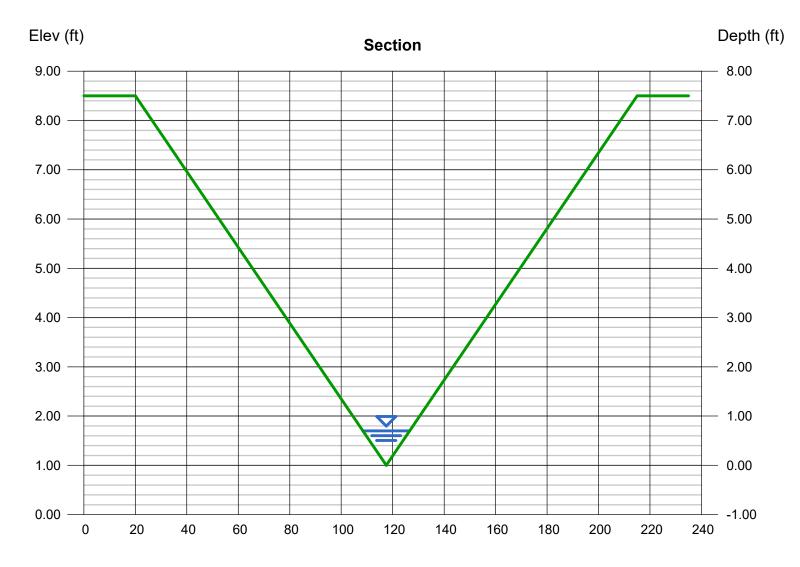

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION E-E

Trapezoidal		Highlighted	
Bottom Width (ft)	= 40.00	Depth (ft)	= 0.11
Side Slopes (z:1)	= 20.00, 59.00	Q (cfs)	= 9.000
Total Depth (ft)	= 2.00	Area (sqft)	= 4.88
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 1.85
Slope (%)	= 5.00	Wetted Perim (ft)	= 48.69
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.12
		Top Width (ft)	= 48.69
Calculations		EGL (ft)	= 0.16
Compute by:	Known Q		
Known Q (cfs)	= 9.00		

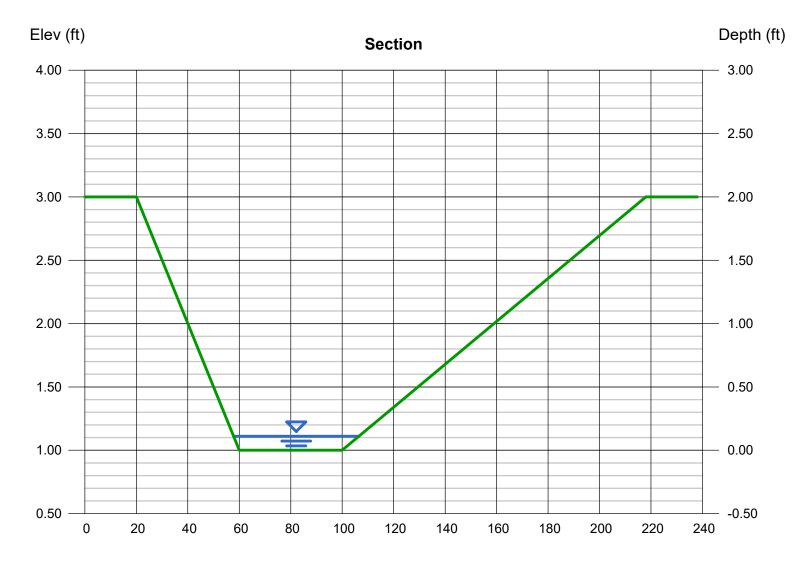

Tuesday, Jul 18 2023


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION F-F

Tri	an	A 11	lar.
	an	чu	a

Triangular		Highlighted	
Side Slopes (z:1)	= 6.00, 6.00	Depth (ft)	= 0.59
Total Depth (ft)	= 10.57	Q (cfs)	= 9.000
		Area (sqft)	= 2.09
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.31
Slope (%)	= 5.40	Wetted Perim (ft)	= 7.18
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.68
		Top Width (ft)	= 7.08
Calculations		EGL (ft)	= 0.88
Compute by:	Known Q		
Known Q (cfs)	= 9.00		

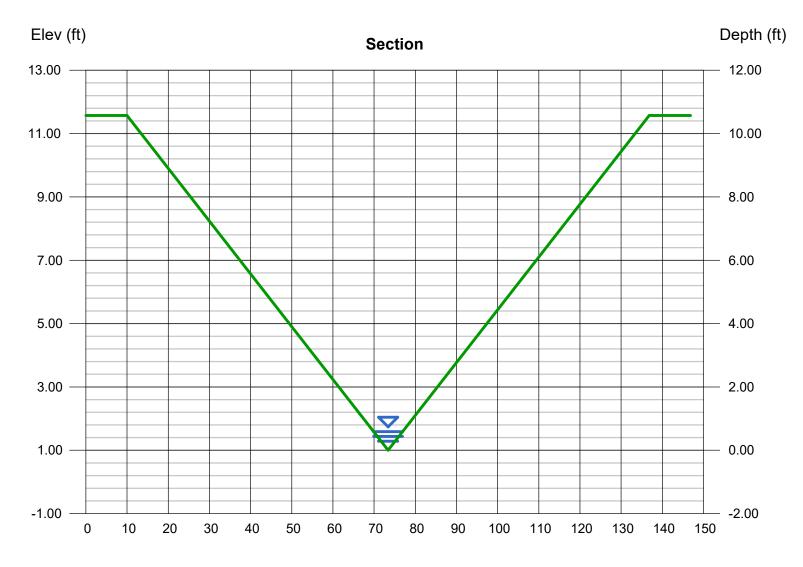


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION G-G

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 4.00	Depth (ft)	= 0.66
Total Depth (ft)	= 8.00	Q (cfs)	= 10.30
		Area (sqft)	= 1.74
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.91
Slope (%)	= 9.40	Wetted Perim (ft)	= 5.44
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.84
		Top Width (ft)	= 5.28
Calculations		EGL (ft)	= 1.20
Compute by:	Known Q		
Known Q (cfs)	= 10.30		

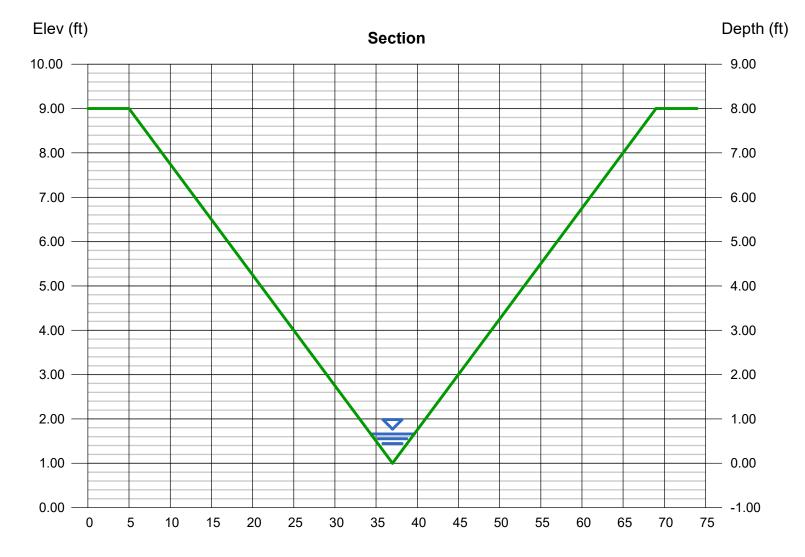


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Friday, Jul 21 2023

SECTION H-H

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 3.00	Depth (ft)	= 0.53
Total Depth (ft)	= 2.50	Q (cfs)	= 4.100
		Area (sqft)	= 0.98
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.17
Slope (%)	= 6.30	Wetted Perim (ft)	= 3.86
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.62
		Top Width (ft)	= 3.71
Calculations		EGL (ft)	= 0.80
Compute by:	Known Q		
Known Q (cfs)	= 4.10		

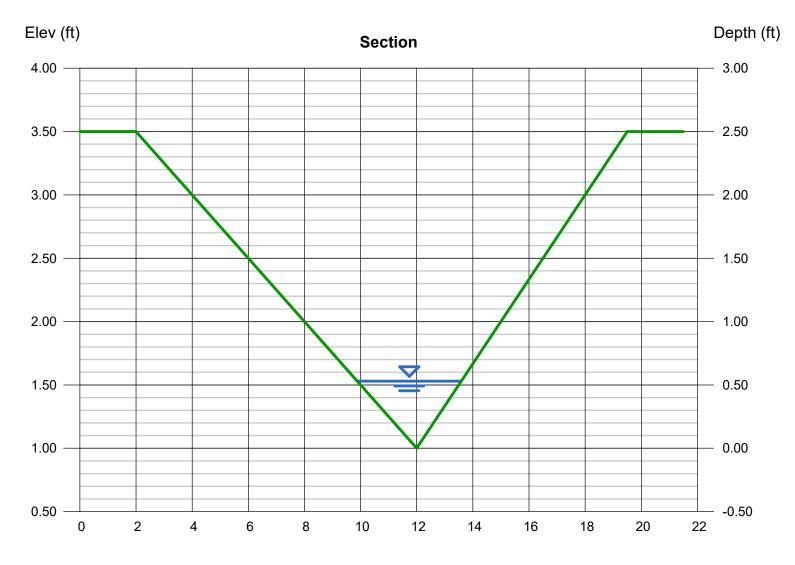


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Friday, Jul 21 2023

SECTION I-I

Triangular		Highlighted	
Side Slopes (z:1)	= 4.00, 3.00	Depth (ft)	= 0.54
Total Depth (ft)	= 2.50	Q (cfs)	= 4.300
		Area (sqft)	= 1.02
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.21
Slope (%)	= 6.30	Wetted Perim (ft)	= 3.93
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.63
		Top Width (ft)	= 3.78
Calculations		EGL (ft)	= 0.82
Compute by:	Known Q		
Known Q (cfs)	= 4.30		

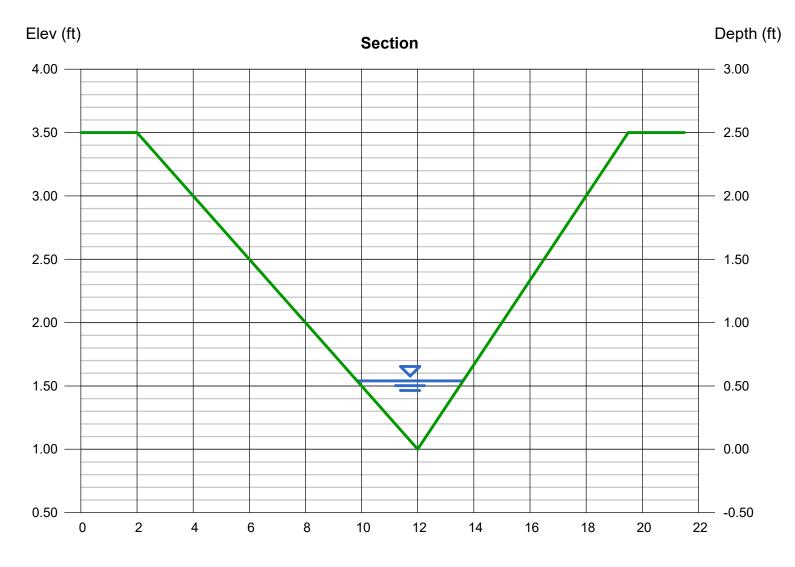


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION J-J

Trapezoidal		Highlighted	
Bottom Width (ft)	= 40.00	Depth (ft)	= 0.22
Side Slopes (z:1)	= 7.00, 5.00	Q (cfs)	= 29.70
Total Depth (ft)	= 8.00	Area (sqft)	= 9.09
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.27
Slope (%)	= 5.00	Wetted Perim (ft)	= 42.68
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.26
		Top Width (ft)	= 42.64
Calculations		EGL (ft)	= 0.39
Compute by:	Known Q		
Known Q (cfs)	= 29.70		

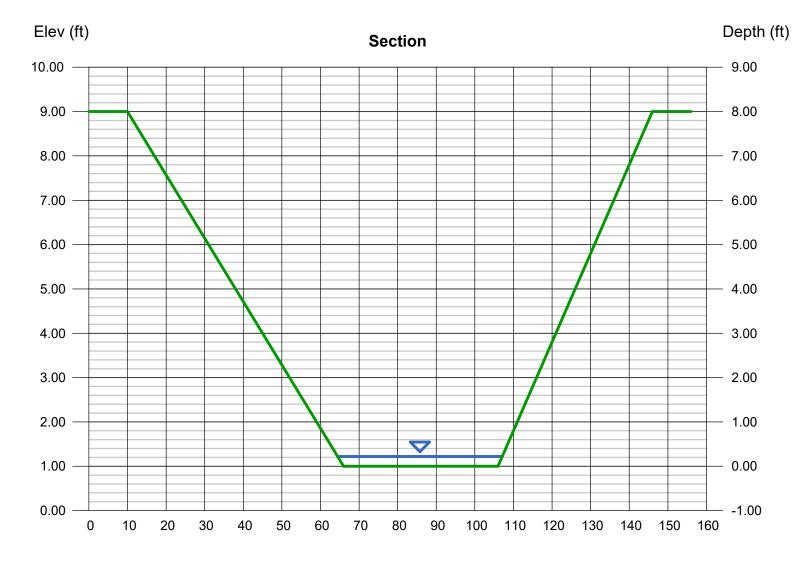


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

SECTION K-K RIGHT

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 6.00, 8.00	Depth (ft)	= 0.77
Total Depth (ft)	= 6.00	Q (cfs)	= 29.70
		Area (sqft)	= 4.15
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 7.16
Slope (%)	= 10.70	Wetted Perim (ft)	= 10.89
N-Value	= 0.035	Crit Depth, Yc (ft)	= 1.03
		Top Width (ft)	= 10.78
Calculations		EGL (ft)	= 1.57
Compute by:	Known Q		
Known Q (cfs)	= 29.70		

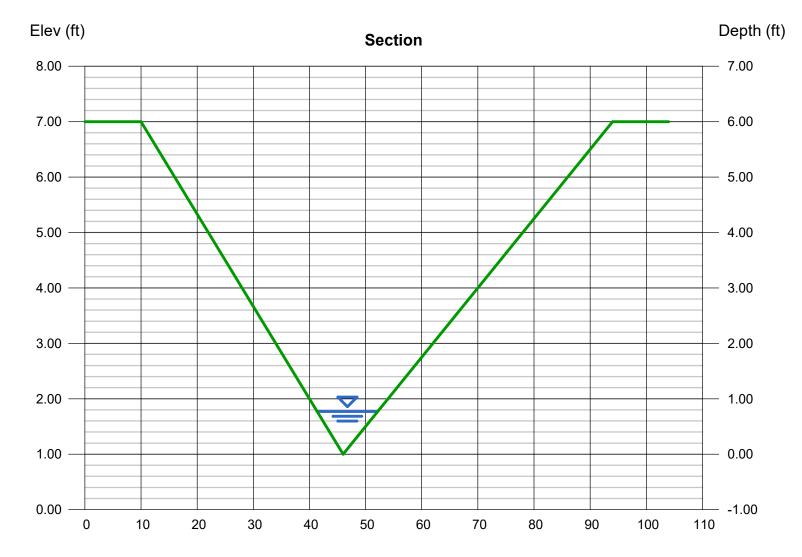


Tuesday, Jul 18 2023

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Jul 27 2023

SECTION L-L

Trapezoidal		Highlighted	
Bottom Width (ft)	= 11.58	Depth (ft)	= 0.52
Side Slopes (z:1)	= 3.00, 3.00	Q (cfs)	= 29.70
Total Depth (ft)	= 4.25	Area (sqft)	= 6.83
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.35
Slope (%)	= 3.00	Wetted Perim (ft)	= 14.87
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.57
		Top Width (ft)	= 14.70
Calculations		EGL (ft)	= 0.81
Compute by:	Known Q		
Known Q (cfs)	= 29.70		

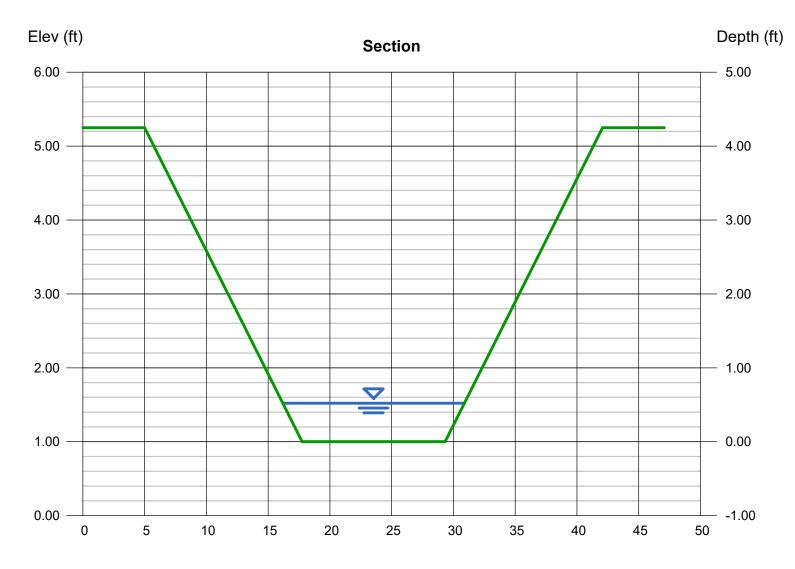


Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Jul 27 2023

SECTION M-M

Trapezoidal		Highlighted	
Bottom Width (ft)	= 13.00	Depth (ft)	= 0.56
Side Slopes (z:1)	= 3.00, 3.00	Q (cfs)	= 36.90
Total Depth (ft)	= 4.88	Area (sqft)	= 8.22
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.49
Slope (%)	= 3.00	Wetted Perim (ft)	= 16.54
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.61
		Top Width (ft)	= 16.36
Calculations		EGL (ft)	= 0.87
Compute by:	Known Q		
Known Q (cfs)	= 36.90		

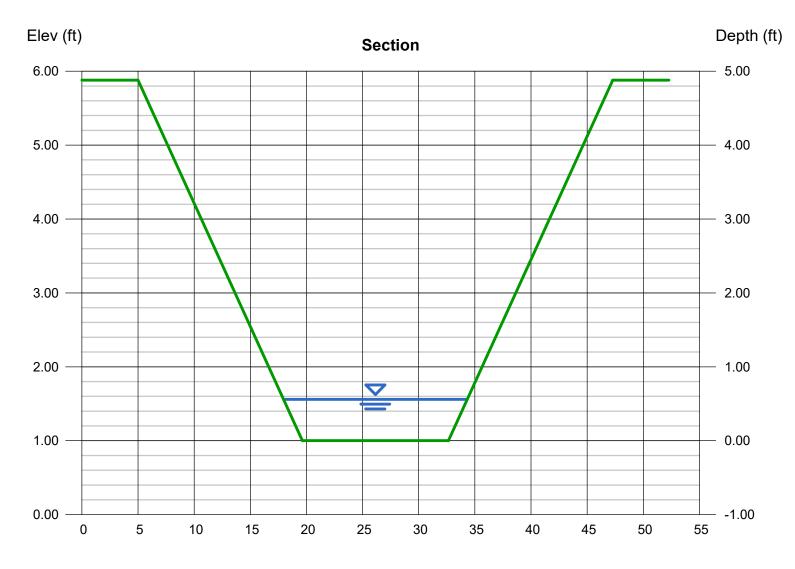


Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Monday, Nov 13 2023

SECTION N-N

Triangular		Highlighted	
Side Slopes (z:1)	= 11.00, 24.00	Depth (ft)	= 0.48
Total Depth (ft)	= 1.70	Q (cfs)	= 16.50
		Area (sqft)	= 4.03
Invert Elev (ft)	= 7446.19	Velocity (ft/s)	= 4.09
Slope (%)	= 6.70	Wetted Perim (ft)	= 16.83
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.57
		Top Width (ft)	= 16.80
Calculations		EGL (ft)	= 0.74
Compute by:	Known Q		
Known Q (cfs)	= 16.50		

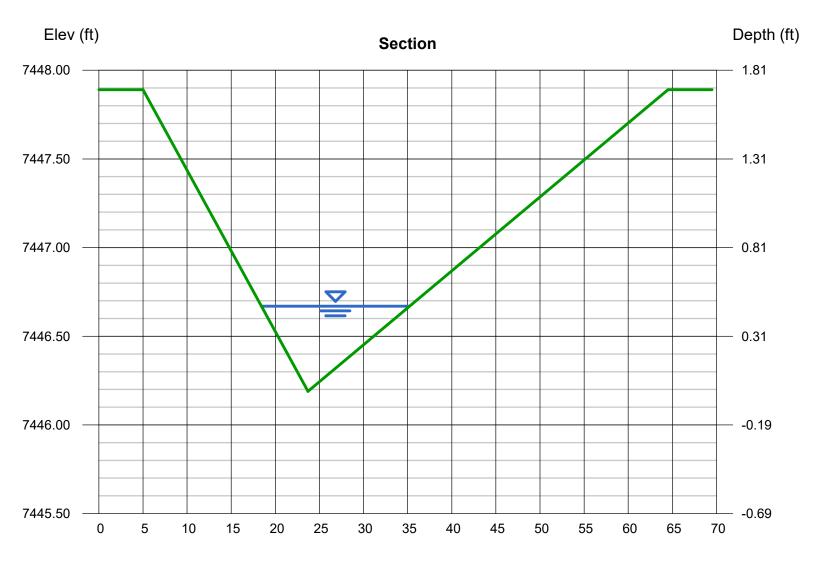


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION O-O

Trapezoidal		Highlighted	
Bottom Width (ft)	= 15.00	Depth (ft)	= 0.27
Side Slopes (z:1)	= 4.00, 5.00	Q (cfs)	= 16.50
Total Depth (ft)	= 12.00	Area (sqft)	= 4.38
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.77
Slope (%)	= 5.30	Wetted Perim (ft)	= 17.49
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.33
		Top Width (ft)	= 17.43
Calculations		EGL (ft)	= 0.49
Compute by:	Known Q		
Known Q (cfs)	= 16.50		

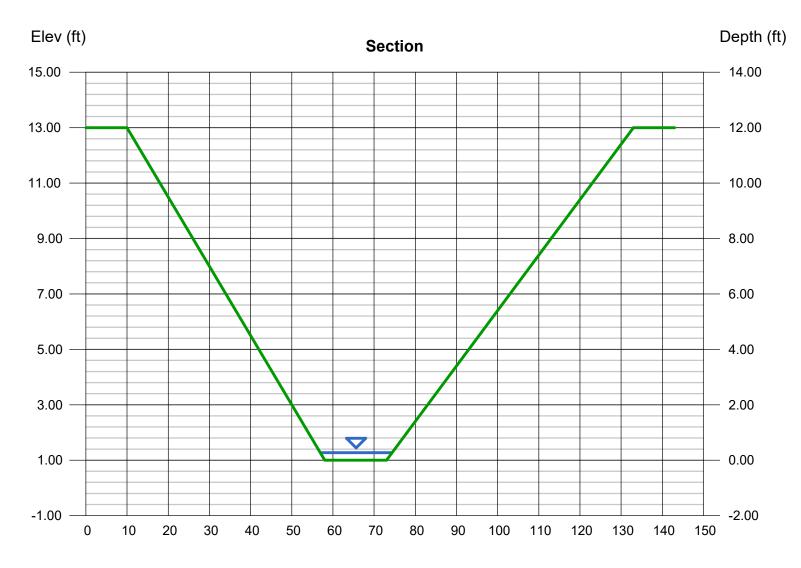


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Jul 18 2023

SECTION P-P

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 5.00, 7.00	Depth (ft)	= 0.62
Total Depth (ft)	= 15.00	Q (cfs)	= 10.00
		Area (sqft)	= 2.31
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 4.34
Slope (%)	= 5.10	Wetted Perim (ft)	= 7.55
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.71
		Top Width (ft)	= 7.44
Calculations		EGL (ft)	= 0.91
Compute by:	Known Q		
Known Q (cfs)	= 10.00		

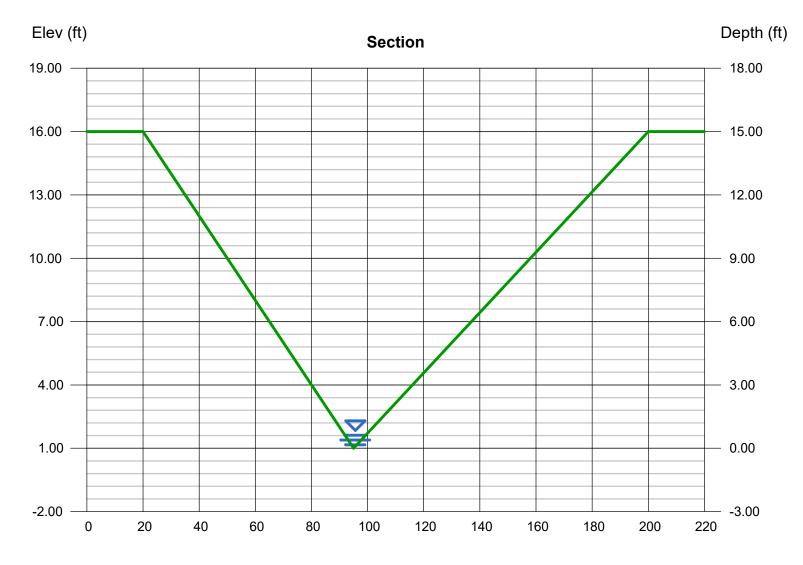


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Jul 27 2023

SECTION Q-Q

Trapezoidal		Highlighted	
Bottom Width (ft)	= 11.80	Depth (ft)	= 0.42
Side Slopes (z:1)	= 3.00, 3.00	Q (cfs)	= 29.70
Total Depth (ft)	= 4.25	Area (sqft)	= 5.49
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.41
Slope (%)	= 6.00	Wetted Perim (ft)	= 14.46
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.56
		Top Width (ft)	= 14.32
Calculations		EGL (ft)	= 0.88
Compute by:	Known Q		
Known Q (cfs)	= 29.70		

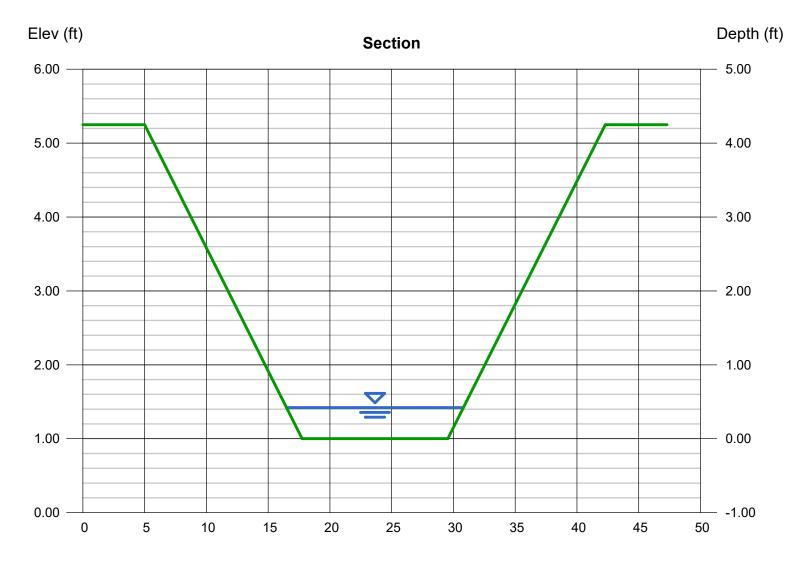


Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Jul 27 2023

SECTION R-R

Trapezoidal		Highlighted	
Bottom Width (ft)	= 8.00	Depth (ft)	= 0.41
Side Slopes (z:1)	= 4.00, 3.00	Q (cfs)	= 20.00
Total Depth (ft)	= 3.25	Area (sqft)	= 3.87
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 5.17
Slope (%)	= 6.00	Wetted Perim (ft)	= 10.99
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.54
		Top Width (ft)	= 10.87
Calculations		EGL (ft)	= 0.83
Compute by:	Known Q		
Known Q (cfs)	= 20.00		

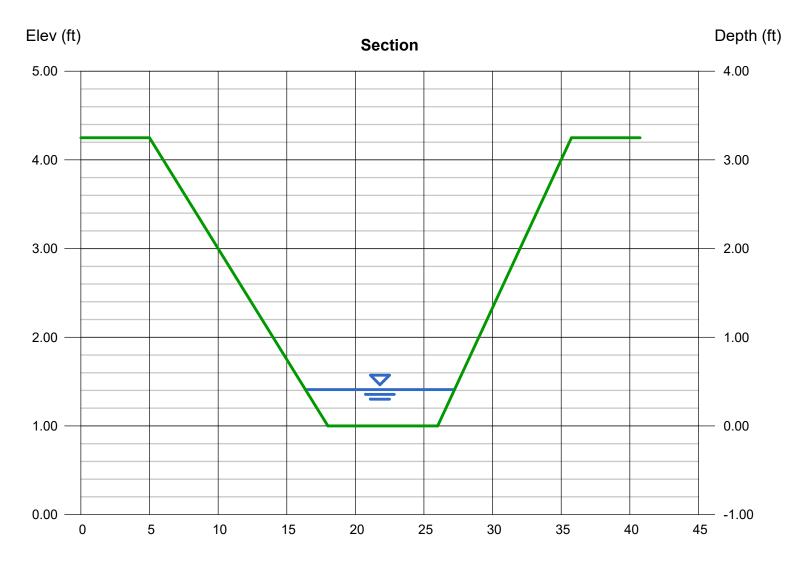


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Thursday, Jul 27 2023

SECTION S-S

Trapezoidal		Highlighted	
Bottom Width (ft)	= 6.00	Depth (ft)	= 0.23
Side Slopes (z:1)	= 4.00, 3.00	Q (cfs)	= 5.000
Total Depth (ft)	= 2.75	Area (sqft)	= 1.57
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 3.19
Slope (%)	= 5.50	Wetted Perim (ft)	= 7.68
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.27
		Top Width (ft)	= 7.61
Calculations		EGL (ft)	= 0.39
Compute by:	Known Q		
Known Q (cfs)	= 5.00		

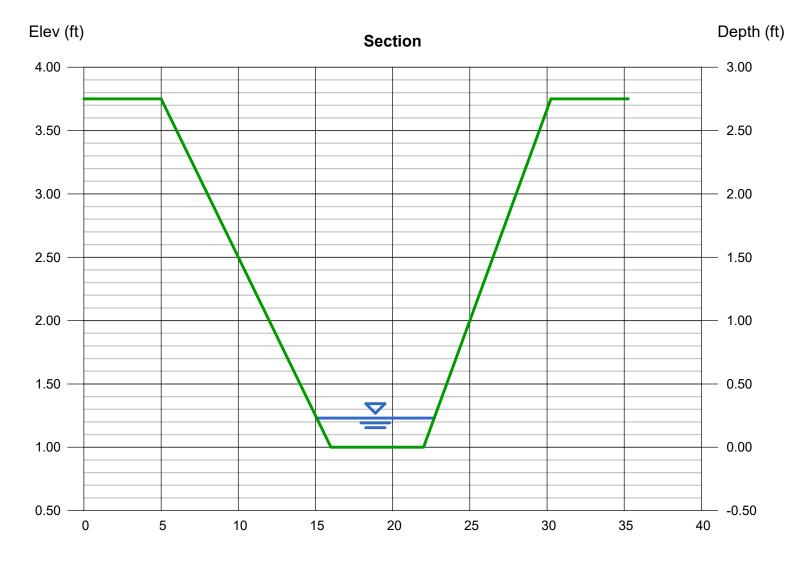


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Monday, Nov 13 2023

0.54 16.50 4.23 3.90 15.70 0.61 15.66 0.78

SECTION T-T

Triangular		Highlighted	
Side Slopes (z:1)	= 11.00, 18.00	Depth (ft)	=
Total Depth (ft)	= 1.50	Q (cfs)	=
		Area (sqft)	=
Invert Elev (ft)	= 7469.41	Velocity (ft/s)	=
Slope (%)	= 5.20	Wetted Perim (ft)	=
N-Value	= 0.035	Crit Depth, Yc (ft)	=
		Top Width (ft)	=
Calculations		EGL (ft)	=
Compute by:	Known Q		
Known Q (cfs)	= 16.50		

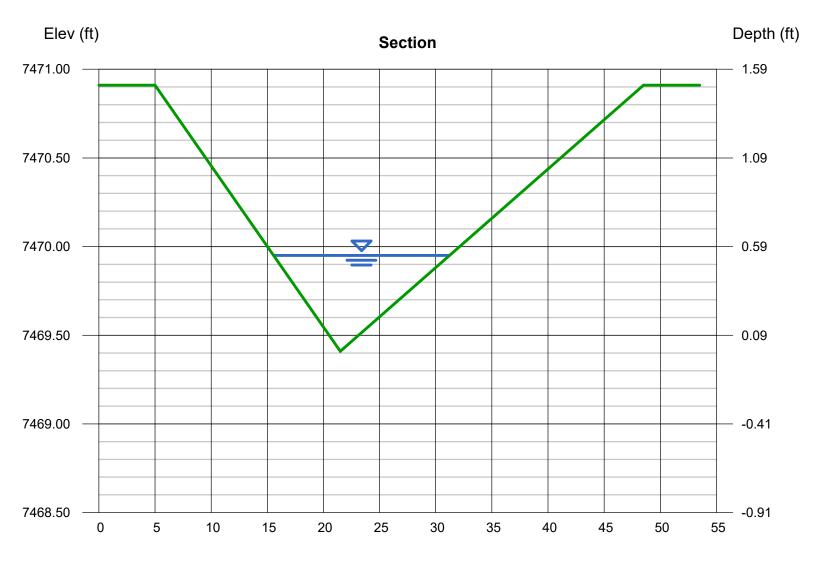


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

SECTION U-U

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 7.60, 13.20	Depth (ft)	= 0.26
Total Depth (ft)	= 5.50	Q (cfs)	= 1.860
		Area (sqft)	= 0.70
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 2.65
Slope (%)	= 7.10	Wetted Perim (ft)	= 5.43
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.29
		Top Width (ft)	= 5.41
Calculations		EGL (ft)	= 0.37
Compute by:	Known Q		
Known Q (cfs)	= 1.86		

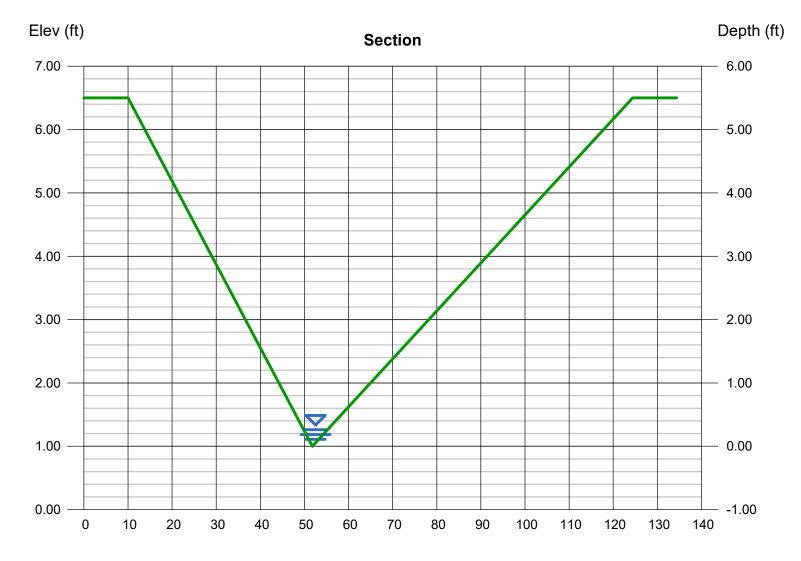


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

SECTION W-W

Triangular		Highlighted	
Side Slopes (z:1)	= 6.30, 6.30	Depth (ft)	= 0.32
Total Depth (ft)	= 10.00	Q (cfs)	= 1.680
		Area (sqft)	= 0.65
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 2.60
Slope (%)	= 4.70	Wetted Perim (ft)	= 4.08
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.34
		Top Width (ft)	= 4.03
Calculations		EGL (ft)	= 0.43
Compute by:	Known Q		
Known Q (cfs)	= 1.68		

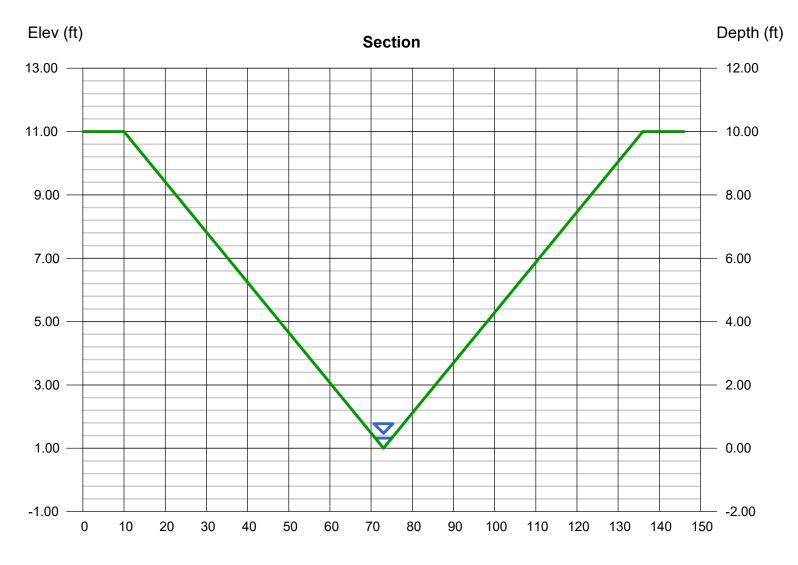


Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

SECTION X-X

Triangular

Triangular		Highlighted	
Side Slopes (z:1)	= 8.50, 8.50	Depth (ft)	= 0.27
Total Depth (ft)	= 9.00	Q (cfs)	= 1.680
		Area (sqft)	= 0.62
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 2.71
Slope (%)	= 6.70	Wetted Perim (ft)	= 4.62
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.30
		Top Width (ft)	= 4.59
Calculations		EGL (ft)	= 0.38
Compute by:	Known Q		
Known Q (cfs)	= 1.68		

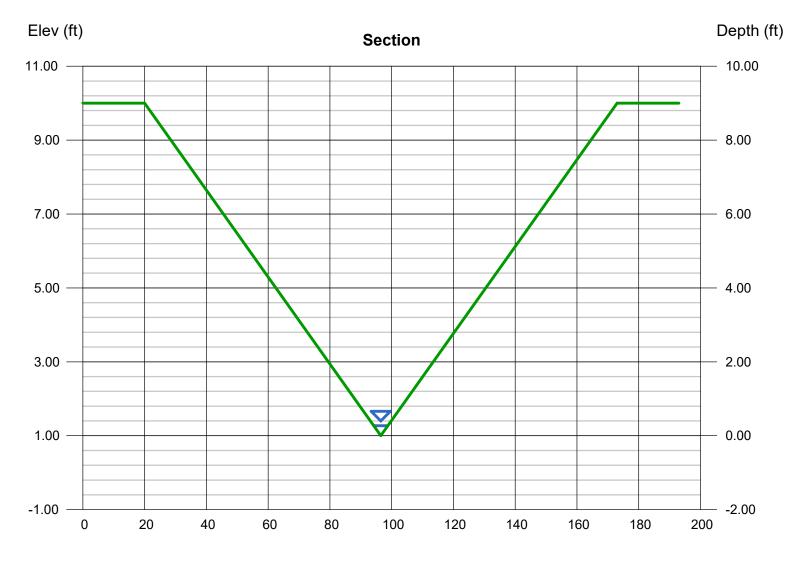


Reach (ft)

Hydraflow Express Extension for Autodesk® Civil 3D® by Autodesk, Inc.

Tuesday, Feb 27 2024

SECTION Y-Y

Trapezoidal		Highlighted	
Bottom Width (ft)	= 52.00	Depth (ft)	= 0.09
Side Slopes (z:1)	= 6.00, 6.00	Q (cfs)	= 8.300
Total Depth (ft)	= 5.00	Area (sqft)	= 4.73
Invert Elev (ft)	= 1.00	Velocity (ft/s)	= 1.76
Slope (%)	= 5.70	Wetted Perim (ft)	= 53.09
N-Value	= 0.035	Crit Depth, Yc (ft)	= 0.10
		Top Width (ft)	= 53.08
Calculations		EGL (ft)	= 0.14
Compute by:	Known Q		
Known Q (cfs)	= 8.30		

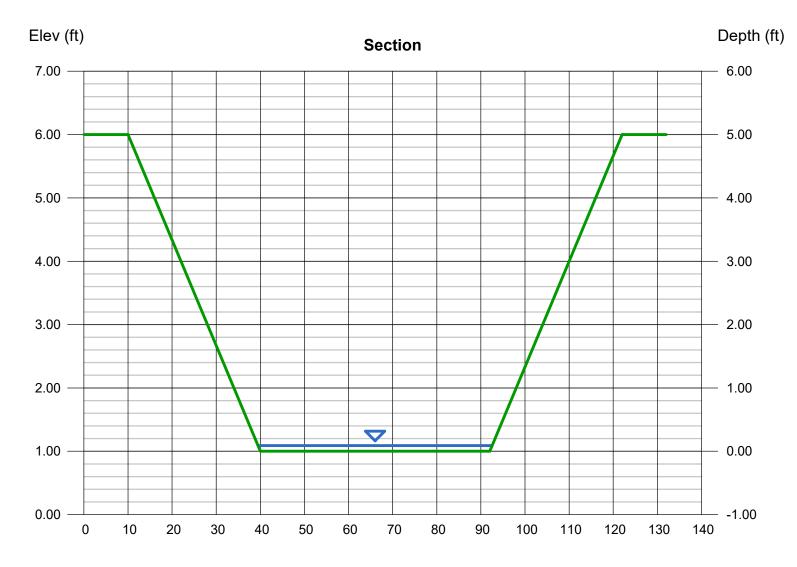

FROUDE NUMBER CALCULATIONS			CALCULATED BY:	DLH	DATE:	3/1/2024
PROJECT: 211030 FILING NO. 3			CHECKED BY:	RL		
		Froude Number (Calculations: 100-YR	•	•	•
Section	Velocity	Gravitational Constant	Hydraulic depth	Xsectional Area	top Width	Froude #
-	ft/s	ft/s^2	ft	ft^2	ft	N/A
A-A	4.87	32.17	0.39	2.08	5.39	1.38
B-B	3.87	32.17	0.28	1.06	3.85	1.30
C-C	7.21	32.17	0.74	19.45	26.46	1.48
D-D	6.47	32.17	0.51	5.3	10.3	1.59
E-E	3.29	32.17	0.21	12.47	59.75	1.27
F-F	6.32	32.17	0.52	6.49	12.48	1.55
G-G	8.45	32.17	0.55	4.84	8.8	2.01
H-H	6.03	32.17	0.45	2.83	6.3	1.59
1-1	6.2	32.17	0.48	3.16	6.65	1.59
J-J	5.54	32.17	0.45	20.58	45.76	1.46
К-К	10.1	32.17	0.63	11.29	17.78	2.23
L-L	6.81	32.17	0.91	16.73	18.3	1.26
M-M	7.37	32.17	1.04	21.35	20.62	1.28
N-N	6.09	32.17	0.42	12.06	29.05	1.67
0-0	6.41	32.17	0.55	11.44	20.76	1.52
P-P	6.05	32.17	0.52	6.61	12.6	1.47
Q-Q	8.51	32.17	0.77	13.4	17.32	1.71
R-R	6.03	32.17	0.46	5.46	11.85	1.57
S-S	5.26	32.17	0.41	3.87	9.5	1.45
T-T	5.73	32.17	0.47	12.81	27.26	1.47
U-U	3.95	32.17	0.21	1.92	8.94	1.50
V-V	8.13	32.17	1.63	29.25	18	1.12
W-W	3.86	32.17	0.28	1.98	7.06	1.29
X-X	4.05	32.17	0.24	1.88	7.99	1.47
Y-Y	3.38	32.17	0.21	11.73	54.64	1.29
Z-Z	9.13	32.17	0.68	9.66	14.31	1.96
AA-AA	4.83	32.17	0.32	4.22	13	1.49
BB-BB	7.76	32.17	0.47	4.42	9.4	2.00
CC-CC	3.99	32.17	0.33	8.6	26.07	1.22
DD-DD	6.63	32.17	0.57	17.19	30	1.54

	SHEAR STRESS & CHANNEL L	ININGS	CALC	ULATED BY:	DLH	DATE:	3/1/2024]			
PROJ	ECT: 211030 FILING NO. 3		CH	ECKED BY:	RL						
	Shear Stress	Calculations: 100-	YR					Channel L	ining Determinati	ion	
Section	unit weight of water	Depth of flow	Slope	Shear Stress			Calculated Value	s	P300 Max	/alues	
-	lb/ft^3	ft	ft/ft	lb/ft^2		Section	Shear Stress	Velocity	Shear Stress	Velocity	Lining Required
A-A	62.43	0.77	0.05	2.48		A-A	2.48	4.87	3	9	P300
B-B	62.43	0.55	0.05	1.77		B-B	1.77	3.87	3	9	P300
C-C	62.43	1.47	0.04	4.04		C-C	4.04	7.21	3	9	TMAX
D-D	62.43	1.03	0.06	3.73		D-D	3.73	6.47	3	9	TMAX
E-E	62.43	0.25	0.05	0.78		E-E	0.78	3.29	3	9	P300
F-F	62.43	1.04	0.05	3.51		F-F	3.51	6.32	3	9	TMAX
G-G	62.43	1.10	0.09	6.46		G-G	6.46	8.45	3	9	TMAX
H-H	62.43	0.90	0.04	2.37		H-H	2.37	6.03	3	9	P300
1-1	62.43	0.95	0.04	2.50		1-1	2.50	6.20	3	9	P300
J-J	62.43	0.48	0.05	1.50		J-J	1.50	5.54	3	9	P300
K-K	62.43	1.27	0.11	8.48		K-K	8.48	10.10	3	9	TMAX
L-L	62.43	1.12	0.03	2.10		L-L	2.10	6.81	3	9	P300
M-M	62.43	1.27	0.03	2.38		M-M	2.38	7.37	3	9	P300
N-N	62.43	0.83	0.07	3.47		N-N	3.47	6.09	3	9	TMAX
0-0	62.43	0.64	0.05	2.12		0-0	2.12	6.41	3	9	P300
P-P	62.43	1.05	0.05	3.34		P-P	3.34	6.05	3	9	TMAX
Q-Q	62.43	0.92	0.04	2.30		Q-Q	2.30	8.51	3	9	P300
R-R	62.43	0.55	0.06	2.06		R-R	2.06	6.03	3	9	P300
S-S	62.43	0.50	0.06	1.72		S-S	1.72	5.26	3	9	P300
T-T	62.43	0.94	0.05	3.05		T-T	3.05	5.73	3	9	TMAX
U-U	62.43	0.43	0.07	1.88		U-U	1.88	3.95	3	9	P300
V-V	62.43	1.50	0.01	0.47		V-V	0.47	8.13	3	9	P300
W-W	62.43	0.56	0.05	1.64]	W-W	1.64	3.86	3	9	P300
X-X	62.43	0.47	0.07	1.97	1	X-X	1.97	4.05	3	9	P300
Y-Y	62.43	0.22	0.06	0.78]	Y-Y	0.78	3.38	3	9	P300
Z-Z	62.43	1.35	0.08	6.74]	Z-Z	6.74	9.13	3	9	ТМАХ
AA-AA	62.43	0.65	0.06	2.43	1	AA-AA	2.43	4.83	3	9	P300
BB-BB	62.43	0.94	0.10	5.57	1	BB-BB	5.57	7.76	3	9	ТМАХ
CC-CC	62.43	0.66	0.04	1.65	1	CC-CC	1.65	3.99	3	9	P300
DD-DD	62.43	1.15	0.05	3.73	1	DD-DD	3.73	6.63	3	9	TMAX




Flying Horse North Filing No. 3 Final Drainage Report Project No.: 211030.20

El Paso County, Colorado

APPENDIX D

WATER QUALITY AND DETENTION CALCULATIONS



Watershed Information

Selected BMP Type =	EDB						
Watershed Area =	25.30	acres					
Watershed Length =	1,800	ft					
Watershed Length to Centroid =	400	ft					
Watershed Slope =	0.050	ft/ft					
Watershed Imperviousness =	35.00%	percent					
Percentage Hydrologic Soil Group A =	0.0%	percent					
Percentage Hydrologic Soil Group B =	100.0%	percent					
Percentage Hydrologic Soil Groups C/D =	0.0%	percent					
Target WQCV Drain Time =	40.0	hours					
Location for 1-hr Rainfall Depths = User Input							

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

the embedded Colorado Urban Hydrograph Procedure.								
Water Quality Capture Volume (WQCV) =	0.350	acre-feet						
Excess Urban Runoff Volume (EURV) =	0.920	acre-feet						
2-yr Runoff Volume (P1 = 1.19 in.) =	0.896	acre-feet						
5-yr Runoff Volume (P1 = 1.5 in.) =	1.390	acre-feet						
10-yr Runoff Volume (P1 = 1.75 in.) =	1.839	acre-feet						
25-yr Runoff Volume (P1 = 2 in.) =	2.496	acre-feet						
50-yr Runoff Volume (P1 = 2.25 in.) =	3.004	acre-feet						
100-yr Runoff Volume (P1 = 2.52 in.) =	3.671	acre-feet						
500-yr Runoff Volume (P1 = 3.14 in.) =	4.979	acre-feet						
Approximate 2-yr Detention Volume =	0.669	acre-feet						
Approximate 5-yr Detention Volume =	0.945	acre-feet						
Approximate 10-yr Detention Volume =	1.334	acre-feet						
Approximate 25-yr Detention Volume =	1.515	acre-feet						
Approximate 50-yr Detention Volume =	1.593	acre-feet						
Approximate 100-yr Detention Volume =	1.853	acre-feet						

Define Zones and Basin Geometry


Zone 1 Volume (WQCV) =	0.350	acre-feet
Zone 2 Volume (EURV - Zone 1) =	0.570	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	0.933	acre-feet
Total Detention Basin Volume =	1.853	acre-feet
Initial Surcharge Volume (ISV) =	user	ft ³
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H _{total}) =	user	ft
Depth of Trickle Channel (H _{TC}) =	user	ft
Slope of Trickle Channel (S _{TC}) =	user	ft/ft
Slopes of Main Basin Sides (Smain) =	user	H:V
Basin Length-to-Width Ratio (R _{L/W}) =	user	
Initial Surcharge Area (A _{ISV}) =	user	ft ²

Initial Surcharge Area (A _{ISV}) =	user	π-
Surcharge Volume Length $(L_{ISV}) =$	user	ft
Surcharge Volume Width $(W_{ISV}) =$	user	ft
Depth of Basin Floor $(H_{FLOOR}) =$	user	ft
Length of Basin Floor $(L_{FLOOR}) =$	user	ft
Width of Basin Floor $(W_{FLOOR}) =$	user	ft
Area of Basin Floor $(A_{FLOOR}) =$		ft 2
Volume of Basin Floor (V_{FLOOR}) =	user	ft ³
Depth of Main Basin $(H_{MAIN}) =$	user	ft
Length of Main Basin $(L_{MAIN}) =$	user	ft
Width of Main Basin $(W_{MAIN}) =$	user	ft
Area of Main Basin (A _{MAIN}) =	user	ft ²
Volume of Main Basin (V _{MAIN}) =	user	ft ³


Calculated Total Basin Volume (V_{total}) = user acre-feet

	-		1							
AR CE	Depth Increme	ent =	ft				Ortional			
	G Ch		Optional	Log -th	MGalala	Area	Optional	A ====	Volume	Volume
ntion Pond)	Stage - Storag		Override	Length	Width		Override	Area		Volume
	Description		Stage (ft)	(ft)	(ft)	(ft ²)	Area (ft ²)	(acre)	(ft ³)	(ac-ft)
	7559 Top of Microp	lood	0.00				10	0.000		
	1555								550	0.012
	7560		1.00				1,091	0.025	550	0.013
	7561		2.00				7,411	0.170	4,801	0.110
	7562		3.00				17,259	0.396	17,136	0.393
	7563		4.00				23,517	0.540	37,524	0.861
	7564		5.00				28,715	0.659	63,640	1.461
	7565		6.00				34,100	0.783	95,048	2.182
	7566		7.00				40,636	0.933	132,416	3.040
	7567		8.00				48,445	1.112	176,956	4.062
	7567.5		8.50				55,140	1.266	202,853	4.657
	7568		9.00				57,141	1.312	230,923	5.301
Optional User Overri	doc									
acre-fe	et									
acre-fe	et									
1.19 inches										
1.50 inches										
1.75 inches										
2.00 inches										
2.25 inches										
			-							
inches										
									1	1
			1							l
										1
									l	L
									-	1 -
			1							l
									l	L
										1
			-							l
									l	L
			1							l
			1							
										<u> </u>
			-							
			-							
			-							
			-							
			-							l
		-								
						-				
						-				
			1			1				L

MHFD-Detention, Version 4.06 (July 2022)

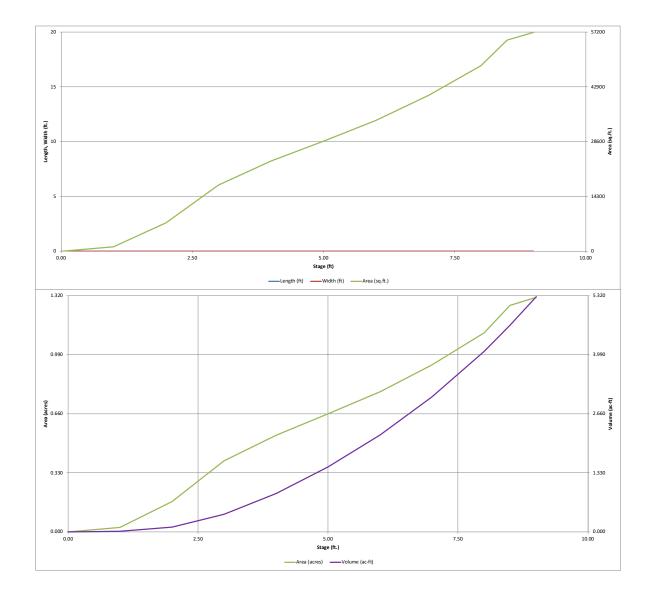

DETENTION BASIN OUTLET STRUCTURE DESIGN										
DETENTION BASIN OUTLET STRUCTURE DESIGN MHFD-Detention, Version 4.06 (July 2022)										
Project: FLYING HORSE NORTH FILING NO. 3										
Basin ID: DESIGN POINT 2 (FLATS/CONDO AREA)										
ZONE 3 ZONE 2 ZONE 1	\frown				Estimated	Estimated				
100-YR				r	Stage (ft)	Volume (ac-ft)	Outlet Type			
VOLUME EURV WOCV			Zone 1 (WC		2.89	0.350	Orifice Plate			
ZONE 1 AND 2	100-YEAR ORIFICE		Zone 2 (El	JRV)	4.11	0.570	Orifice Plate			
PERMANENT ORIFICES	0		Zone 3 (100-y	/ear)	5.57	0.933	Weir&Pipe (Restrict)			
•	Configuration (Re				Total (all zones)	1.853				
User Input: Orifice at Underdrain Outlet (typical					<i>c</i>			Calculated Parame		<u>1</u>
Underdrain Orifice Invert Depth =	N/A	ft (distance below	the filtration m	nedia	surface)		rain Orifice Area =	N/A	ft ²	
Underdrain Orifice Diameter =	N/A	inches				Underdrain	Orifice Centroid =	N/A	feet	
User Input: Orifice Plate with one or more orifi	ces or Elliptical Slot	Weir (typically use	d to drain WO	CV ar	nd/or ELIRV in a se	dimentation BMP)		Calculated Parame	ators for Plato	
Centroid of Lowest Orifice =	0.00	ft (relative to basir	-	-			e Area per Row =	N/A	ft ²	
Depth at top of Zone using Orifice Plate =	4.00	ft (relative to basir		-		-	tical Half-Width =	N/A	feet	
Orifice Plate: Orifice Vertical Spacing =	N/A	inches		5	,		al Slot Centroid =	N/A	feet	
Orifice Plate: Orifice Area per Row =	N/A	sq. inches				EI	liptical Slot Area =	N/A	ft ²	
User Input: Stage and Total Area of Each Orific	e Row (numbered	from lowest to high	<u>iest)</u>							•
	Row 1 (required)	Row 2 (optional)	Row 3 (option	nal)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)	
Stage of Orifice Centroid (ft)	0.00	2.60								
Orifice Area (sq. inches)	2.00	4.50								
		r	1	—	r				 	1
	Row 9 (optional)	Row 10 (optional)	Row 11 (optio	nal)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)	
Stage of Orifice Centroid (ft)										
Orifice Area (sq. inches)										
User Input: Vertical Orifice (Circular or Rectand	udar)							Calculated Parame	eters for Vertical Or	ifico
User input. Vertical Onlice (Circular or Rectany	Not Selected	Not Selected	1					Not Selected	Not Selected	
Invert of Vertical Orifice =	N/A		ft (relative to	hasin	n bottom at Stage =	-∩ftì Vert	ical Orifice Area =	N/A	N/A	ft ²
Depth at top of Zone using Vertical Orifice =	N/A N/A				n bottom at Stage =		Orifice Centroid =	N/A N/A	N/A	feet
Vertical Orifice Diameter =	N/A	-	inches	bush.	Doutin at Suge	- 0 10)	Office centrole	1975	14/73	
verdear erinee Brannen.		14/1	linenes							
User Input: Overflow Weir (Dropbox with Flat of	or Sloped Grate and	l Outlet Pipe OR Re	ctangular/Trar	pezoir	dal Weir and No O	utlet Pipe)_		Calculated Parame	eters for Overflow V	Veir
· · ·	Zone 3 Weir	Not Selected						Zone 3 Weir	Not Selected	1
Overflow Weir Front Edge Height, Ho =	4.50	N/A	ft (relative to b	basin b	oottom at Stage = 0	ft) Height of Grate	Upper Edge, Ht =	4.50	N/A	feet
Overflow Weir Front Edge Length =	6.00	N/A	feet				eir Slope Length =	3.00	N/A	feet
Overflow Weir Grate Slope =	0.00	N/A	H:V		Gra	ate Open Area / 100)-yr Orifice Area =	6.07	N/A	
Horiz. Length of Weir Sides =	3.00	'	feet			erflow Grate Open		12.53	N/A	ft ²
Overflow Grate Type =	Type C Grate	N/A	l ,	_		verflow Grate Oper		6.26	N/A	ft ²
Debris Clogging % =	50%	N/A	%	P	LANS HA	VE BEEl	N			
					UPDAT					
User Input: Outlet Pipe w/ Flow Restriction Plate			Rectangular O				ited Parameters	s for Outlet Pipe w/		late
	Zone 3 Restrictor	Not Selected			REFLE	CT THE		Zone 3 Restrictor	Not Selected	- 2
Depth to Invert of Outlet Pipe =	0.50		ft (distance bel			EPORTE	Orifice Area =	2.07	N/A	ft ²
Outlet Pipe Diameter =		,	inches					0.71	N/A	feet
Restrictor Plate Height Above Pipe Invert =	15.00	1	inches		HE	RE	Plate on Pipe =	1.82	N/A	radians
User Input: Emergency Spillway (Rectangular o	r Tranezoidal)							Calculated Parame	ators for Spillway	
Spillway Invert Stage=	8.00	ft (relative to basir	n bottom at St:	- 906	- 0 ft)	Spillway De	esign Flow Depth=	0.91	feet	
Spillway Crest Length =	23.00	feet <<		age –			op of Freeboard =	9.91	feet	
Spillway End Slopes =	4.00	H:V	–17' b	er≮		-	op of Freeboard =	1.31	acres	
Freeboard above Max Water Surface =	1.00	feet				Basin Volume at T	•	5.30	acre-ft	
			<u> </u>	lan	IS				1	
Routed Hydrograph Results				hs and		y entering new valu				
Design Storm Return Period = One-Hour Rainfall Depth (in) =	WQCV N/A	EURV N/A	2 Year 1.19		5 Year 1.50	10 Year 1.75	25 Year 2.00	50 Year 2.25	100 Year 2.52	500 Year 3.14
CUHP Runoff Volume (acre-ft) =	0.350	0.920	0.896		1.390	1.839	2.496	3.004	3.671	4.979
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	0.896		1.390	1.839	2.496	3.004	3.671	4.979
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A	4.0		10.9	16.1	28.3	35.4	44.3	61.5
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A N/A	N/A N/A	0.16		0.43	0.64	1.12	1.40	1.75	2.43
Predevelopment Unit Peak Flow, q (cfs/acre) = Peak Inflow Q (cfs) =	N/A N/A	N/A N/A	16.5		26.5	33.7	46.4	55.6	67.6	90.0
Peak Outflow Q (cfs) =	0.2	0.3	0.3		2.1	7.3	18.1	22.8	24.0	26.0
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A		0.2	0.5	0.6	0.6	0.5	0.4
Structure Controlling Flow =	Plate	Plate	Plate		Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Outlet Plate 1	Outlet Plate 1
Max Velocity through Grate 1 (fps) = Max Velocity through Grate 2 (fps) =	N/A N/A	N/A N/A	N/A N/A		0.1 N/A	0.5 N/A	1.4 N/A	1.8 N/A	1.9 N/A	2.0 N/A
Time to Drain 97% of Inflow Volume (hours) =	39	62	62		72	70	67	65	63	58
Time to Drain 99% of Inflow Volume (hours) =	40	65	65		76	75	74	74	73	71
Maximum Ponding Depth (ft) =	2.89	4.11	3.97		4.65	4.88	5.22	5.44	6.01	7.03
Area at Maximum Ponding Depth (acres) = Maximum Volume Stored (acre-ft) =	0.37 0.351	0.55 0.922	0.54 0.845		0.62	0.64 1.383	0.69 1.609	0.71 1.763	0.78 2.190	0.94 3.059

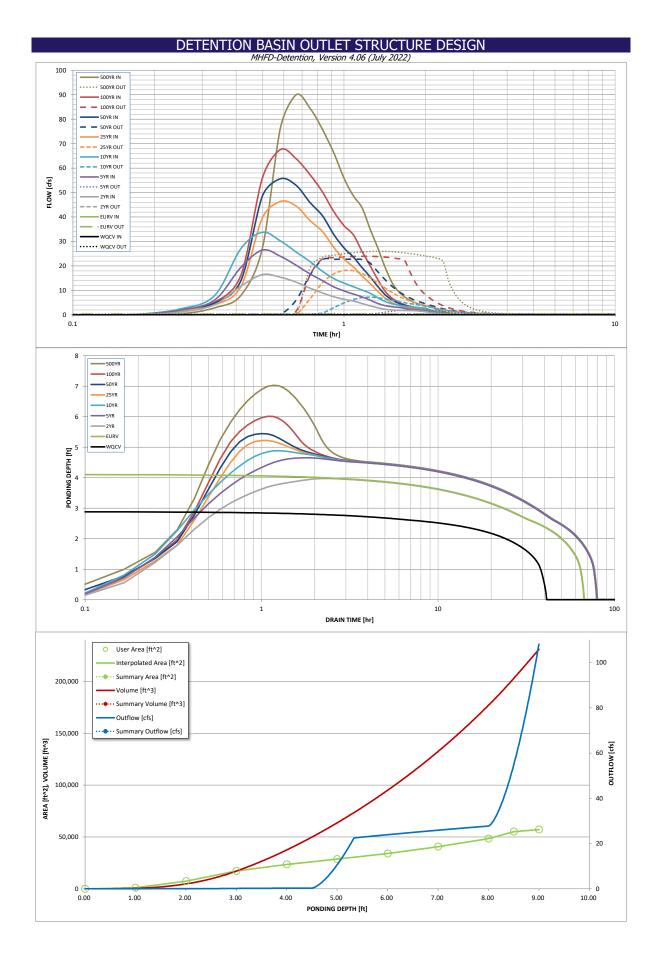

DETENTION BASIN OUTLET STRUCTURE DESIGN Outflow Hydrograph Workbook Filename:

Inflow Hydrographs


ľ

	Inflow Hydrographs The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.									
										CHILID
Time Interval	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
Time Interval	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]		25 Year [cfs]		100 Year [cfs]	
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.01	0.45
	0:15:00 0:20:00	0.00	0.00	1.20	1.98	2.46	1.66	2.06	2.03	2.90
	0:25:00	0.00	0.00	4.20 11.73	6.05 19.44	7.89 27.07	4.12 11.59	4.80 13.98	5.16 16.18	7.95 27.22
	0:30:00	0.00	0.00	16.48	26.46	33.72	39.65	48.53	55.91	76.43
	0:35:00	0.00	0.00	15.39	23.95	30.18	46.35	55.64	67.59	90.00
	0:40:00	0.00	0.00	13.34	20.25	25.65	44.39	52.88	63.75	84.45
	0:45:00	0.00	0.00	10.91	16.76	21.76	38.54	45.89	57.28	75.78
	0:50:00	0.00	0.00	8.93	13.97	17.79	34.04	40.51	50.20	66.31
	0:55:00	0.00	0.00	7.40	11.45	14.85	27.59	32.92	42.22	55.94
	1:00:00	0.00	0.00	6.37	9.77	12.98	22.81	27.38	36.51	48.67
	1:05:00 1:10:00	0.00	0.00	5.62 4.61	8.51 7.34	11.51 10.11	19.57	23.63 19.30	32.71 25.90	43.72 34.95
	1:15:00	0.00	0.00	3.68	5.99	8.79	15.92 12.73	19.50	20.03	27.35
	1:20:00	0.00	0.00	2.88	4.65	6.96	9.56	11.60	14.39	19.62
	1:25:00	0.00	0.00	2.31	3.77	5.47	6.89	8.32	9.72	13.47
	1:30:00	0.00	0.00	2.00	3.33	4.59	5.05	6.16	6.93	9.75
	1:35:00	0.00	0.00	1.86	3.09	4.01	3.93	4.83	5.29	7.51
	1:40:00	0.00	0.00	1.79	2.68	3.61	3.23	3.99	4.19	5.99
	1:45:00	0.00	0.00	1.74	2.36	3.33	2.76	3.42	3.44	4.95
	1:50:00	0.00	0.00	1.70	2.12	3.13	2.47	3.06	2.93	4.23
	1:55:00	0.00	0.00	1.48	1.95	2.86	2.27	2.80	2.57	3.72
	2:00:00	0.00	0.00	1.29	1.77	2.48	2.14	2.64	2.36	3.43
	2:05:00 2:10:00	0.00	0.00	0.96	1.30	1.81	1.57	1.93	1.74	2.50
	2:15:00	0.00	0.00	0.71	0.94	1.28 0.91	1.12 0.80	1.38 0.98	1.24 0.90	1.78 1.29
	2:20:00	0.00	0.00	0.37	0.07	0.65	0.57	0.50	0.50	0.91
	2:25:00	0.00	0.00	0.26	0.32	0.45	0.39	0.48	0.44	0.63
	2:30:00	0.00	0.00	0.17	0.21	0.31	0.27	0.33	0.31	0.43
	2:35:00	0.00	0.00	0.11	0.14	0.20	0.18	0.22	0.20	0.29
	2:40:00	0.00	0.00	0.07	0.09	0.12	0.11	0.13	0.12	0.17
	2:45:00	0.00	0.00	0.03	0.05	0.06	0.06	0.07	0.06	0.08
	2:50:00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.03
	2:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:00:00 3:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:55:00 4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:25:00 4:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:45:00 4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:05:00 E:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00 5:15:00	0.00 0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00 5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00 6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0.00.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

	Design Procedure Form:	Extended Detention Basin (EDB)
·		(Version 3.07, March 2018) Sheet 1 of 3
Designer:	Richard Lyon, PE	
Company: Date:	HR Green March 1, 2024	
Project:	Flying Horse North Filing 3 - Pond A	
Location:	El Paso County, Colorado	
1. Basin Storage	Volume	
A) Effective Imp	perviousness of Tributary Area, I _a	I _a = <u>35.0</u> %
B) Tributary Are	ea's Imperviousness Ratio (i = I _a / 100)	i = 0.350
C) Contributing	g Watershed Area	Area = 25.300 ac
D) For Waters	heds Outside of the Denver Region, Depth of Average	d ₆ = in
	ducing Storm	
E) Design Con		Choose One Water Quality Capture Volume (WQCV)
(Select EUF	RV when also designing for flood control)	Excess Urban Runoff Volume (EURV)
	ume (WQCV) Based on 40-hour Drain Time	V _{DESIGN} =ac-ft
(V _{DESIGN} = (1.0 * (0.91 * i ³ - 1.19 * i ² + 0.78 * i) / 12 * Area)	
	heds Outside of the Denver Region, lity Capture Volume (WQCV) Design Volume	V _{DESIGN OTHER} =ac-ft
	$R_{R} = (d_{6}^{*}(V_{\text{DESIGN}}/0.43))$	
H) User Input of	of Water Quality Capture Volume (WQCV) Design Volume	V _{DESIGN USER} = 0.350 ac-ft
(Only if a di	ifferent WQCV Design Volume is desired)	
	plogic Soil Groups of Tributary Watershed	HSG _ =%
ii) Percent	age of Watershed consisting of Type A Soils tage of Watershed consisting of Type B Soils	$HSG_{B} = 100$ %
iii) Percen	tage of Watershed consisting of Type C/D Soils	HSG _{C/D} = 0%
	an Runoff Volume (EURV) Design Volume A: EURV _A = 1.68 * i ^{1.28}	EURV _{DESIGN} =ac-f t
For HSG E	B: EURV _B = 1.36 * i ^{1.08}	
For HSG C	C/D: EURV _{C/D} = 1.20 * i ^{1.08}	
	of Excess Urban Runoff Volume (EURV) Design Volume ifferent EURV Design Volume is desired)	EURV _{DESIGN USER} = 0.920 ac-f t
(2)	······································	
	length to Width Ratio	L : W =: 1
(A basin length	to width ratio of at least 2:1 will improve TSS reduction.)	
3. Basin Side Slop	Des	
A) Basin Maxir	mum Side Slopes	Z = 4.00 ft / ft
(Horizontal	distance per unit vertical, 4:1 or flatter preferred)	
1 Inlat		Storm sewer will inlet to a forebay.
4. Inlet	· · · · · · · · · · · · · · · · · · ·	All other flows will enter as sheet flow, there are no other concentrated flows.
 A) Describe m inflow locati 	eans of providing energy dissipation at concentrated ions:	
5. Forebay		
A) Minimum Fo		V _{FMN} = 0.011 ac-ft
(V _{FMIN}	$_{\rm N} = 3\%$ of the WQCV)	
B) Actual Fore	bay Volume	V _F = 0.012 ac-ft
C) Forebay De		
	= <u>18</u> inch maximum)	D _F = <u>18.0</u> in
D) Forebay Dis	scharge	
i) Undetain	ed 100-year Peak Discharge	Q ₁₀₀ = 67.60 cfs
ii) Forebay (Q _F = 0.0	Discharge Design Flow)2 * Q ₁₀₀)	Q _F = 1.35 cfs
E) Forebay Dis	charge Design	Choose One
		Berm With Pipe Flow too small for berm w/ pipe Will with Pipe
		Wall with Rect. Notch Wall with V-Notch Weir
E) Dischart D	tino Sizo (minimum 9 inchos)	
	ipe Size (minimum 8-inches)	
G) Rectangular	r Notch Width	Calculated W _N = 6.3 in

	Design Procedure Form: E	Extended Detention Basin (EDB)
Designer:	Richard Lyon, PE	Sheet 2 of 3
Company:	HR Green	
Date:	March 1, 2024	
Project:	Flying Horse North Filing 3 - Pond A	
Location:	El Paso County, Colorado	
6. Trickle Channel		Choose One © Concrete
 A) Type of Tric 		Soft Bottom
F) Slope of Tric	skle Channel	S = 0.0100 ft / ft
7. Micropool and C	Dutlet Structure	
A) Depth of Mic	cropool (2.5-feet minimum)	$D_{M} = 2.5$ ft
B) Surface Are	a of Micropool (10 ft ² minimum)	$A_{\rm M} = 50$ sq ft
C) Outlet Type		Choose One Orifice Plate Other (Describe):
D) Smallest Dir (Use UD-Deten	mension of Orifice Opening Based on Hydrograph Routing tion)	D _{orifice} =inches
E) Total Outlet	Area	A _{ct} =square inches
8. Initial Surcharge	e Volume	
	ial Surcharge Volume commended depth is 4 inches)	D _{IS} = <u>6</u> in
	ial Surcharge Volume lume of 0.3% of the WQCV)	V _{is} =46 cu ft
C) Initial Surcha	arge Provided Above Micropool	V _s =25.0cu ft
9. Trash Rack		
A) Water Quali	ty Screen Open Area: $A_t = A_{ot} * 38.5*(e^{-0.095D})$	A _t =square inches
in the USDCM,	en (If specifying an alternative to the materials recommended indicate "other" and enter the ratio of the total open are to the for the material specified.)	
	Other (Y/N): N	
C) Ratio of Tota	al Open Area to Total Area (only for type 'Other')	User Ratio =
D) Total Water	Quality Screen Area (based on screen type)	A _{total} =sq. in.
	sign Volume (EURV or WQCV) design concept chosen under 1E)	H=feet
F) Height of Wa	ter Quality Screen (H_{TR})	H _{TR} = inches
	ter Quality Screen Opening (W _{opening}) inches is recommended)	W _{opening} = inches

	Design Procedure Form:	Extended Detention Basin (EDB)
Designer: Company: Date: Project: Location:	Richard Lyon, PE HR Green March 1, 2024 Flying Horse North Filing 3 - Pond A El Paso County, Colorado	Sheet 3 of 3
B) Slope of Ov	ankment mbankment protection for 100-year and greater overtopping: verflow Embankment distance per unit vertical, 4:1 or flatter preferred)	Soil rip-rap Ze =ft / ft
11. Vegetation		Choose One O Irrigated Not Irrigated
12. Access		
	ediment Removal Procedures	15' width maintenance path from cul-de-sac with max 2.0% cross slope and max 15% longitudinal slope provided to access forebay and outlet structure.
Notes:		

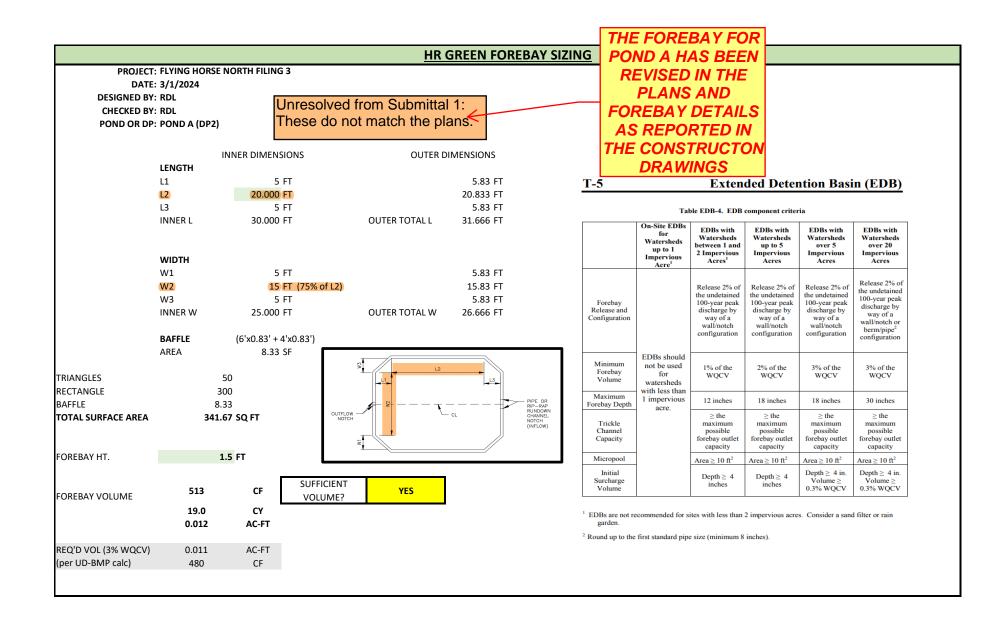

MHFD-Detention, Version 4.06 (July 2022)

Project: FLYING HORSE NORTH FILING NO. 3 Basin ID: POND B - DESIGN POINT 17 (SW POND ESTATES AREA)

	ZONE 2 ZONE 2 ZONE 1	100-YEAR
VOLUME EURY WOCV		100-YEAR

PERMANENT CONFICES POOL Example Zone Configuration (Retention Pond)

acre-feet

Water

atershed Information						
Selected BMP Type =	EDB					
Watershed Area =	128.40	acres				
Watershed Length =	4,000	ft				
Watershed Length to Centroid =	665	ft				
Watershed Slope =	0.050	ft/ft				
Watershed Imperviousness =	10.04%	percent				
Percentage Hydrologic Soil Group A =	0.0%	percent				
Percentage Hydrologic Soil Group B =	100.0%	percent				
Percentage Hydrologic Soil Groups C/D =	0.0%	percent				
Target WQCV Drain Time =	40.0	hours				
Location for 1-hr Rainfall Depths =	User Input					

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Irhan Hydrograph Procedure.

the embedded Colorado Urban Hydrograph Procedure.						
Water Quality Capture Volume (WQCV) =	0.719	acre-feet				
Excess Urban Runoff Volume (EURV) =	1.212	acre-feet				
2-yr Runoff Volume (P1 = 1.19 in.) =	1.712	acre-feet				
5-yr Runoff Volume (P1 = 1.5 in.) =	3.777	acre-feet				
10-yr Runoff Volume (P1 = 1.75 in.) =	5.836	acre-feet				
25-yr Runoff Volume (P1 = 2 in.) =	9.505	acre-feet				
50-yr Runoff Volume (P1 = 2.25 in.) =	12.010	acre-feet				
100-yr Runoff Volume (P1 = 2.52 in.) =	15.612	acre-feet				
500-yr Runoff Volume (P1 = 3.14 in.) =	22.181	acre-feet				
Approximate 2-yr Detention Volume =	0.774	acre-feet				
Approximate 5-yr Detention Volume =	1.214	acre-feet				
Approximate 10-yr Detention Volume =	2.515	acre-feet				
Approximate 25-yr Detention Volume =	3.510	acre-feet				
Approximate 50-yr Detention Volume =	3.673	acre-feet				
Approximate 100-yr Detention Volume =	4.746	acre-feet				

Define Zones and Basin Geometry


Zone 1 Volume (WQCV) =	0.719	acre-feet
Zone 2 Volume (EURV - Zone 1) =	0.493	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	3.534	acre-feet
Total Detention Basin Volume =	4.746	acre-feet
Initial Surcharge Volume (ISV) =	user	ft ³
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H _{total}) =	user	ft
Depth of Trickle Channel (H _{TC}) =	user	ft
Slope of Trickle Channel (STC) =	user	ft/ft
Slopes of Main Basin Sides (S _{main}) =	user	H:V
Basin Length-to-Width Ratio (R _{L/W}) =	user	
		-
Taibial Complement Area (A) -		a 2


Initial Surcharge Area (A _{ISV}) =	user	ft '
Surcharge Volume Length $(L_{ISV}) =$	user	ft
Surcharge Volume Width $(W_{ISV}) =$	user	ft
Depth of Basin Floor $(H_{FLOOR}) =$	user	ft
Length of Basin Floor $(L_{FLOOR}) =$	user	ft
Width of Basin Floor (W _{FLOOR}) =	user	ft
Area of Basin Floor $(A_{FLOOR}) =$	user	ft 2
Volume of Basin Floor (V _{FLOOR}) =	user	ft ³
Depth of Main Basin $(H_{MAIN}) =$	user	ft
Length of Main Basin $(L_{MAIN}) =$	user	ft
Width of Main Basin $(W_{MAIN}) =$	user	ft
Area of Main Basin $(A_{MAIN}) =$	user	ft 2
Volume of Main Basin (V _{MAIN}) =	user	ft ³


Calculated Total Basin Volume (V_{total}) = user acre-feet

n tion Pond)		Denth Increment -		ft ft							
uon Pond)		Depth Increment =	Store-	Optional	1 condition	Mindel	Aren	Optional	Aro-	Volumo	Volum
		Stage - Storage Description	Stage (ft)	Override Stage (ft)	Length (ft)	Width (ft)	Area (ft ²)	Override Area (ft ²)	Area (acre)	Volume (ft ³)	Volume (ac-ft)
	7366			0.00				440	0.010		
		7367		1.00				6,860	0.157	3,650	0.084
		7368		2.00	-			11,730	0.269	12,945	0.297
		7369		3.00				17,800	0.409	27,710	0.636
		7370		4.00				24,750	0.568	48,985	1.125
		7371		5.00				32,325	0.742	77,522	1.780
		7372		6.00				37,580	0.863	112,475	2.582
		7373		7.00				41,900	0.962	152,215	3.494
		7374		8.00				45,840	1.052	196,085	4.501
		7375		9.00				50,000	1.148	244,005	5.602
		7376		10.00				54,370	1.248	296,190	6.800
		7676.5		10.50				62,250	1.429	325,345	7.469
		7377		11.00				64,651	1.484	357,070	8.197
Optional User	r Overrides										
	acre-feet										
	acre-feet				-	-					
1.19	inches										
1.50	inches				-	-					
1.75	inches										
2.00	inches				-						
2.25	inches				-	-					
2.52	inches				-				-		
	inches										
			-		-						
									-		
			-		-						
									_		
					-						
					1						
					1 1						
					1 1						
					-	-			-		
									-		
					1						
					1 1 1						
					1 1 1 1		 				

MHFD-Detention, Version 4.06 (July 2022)

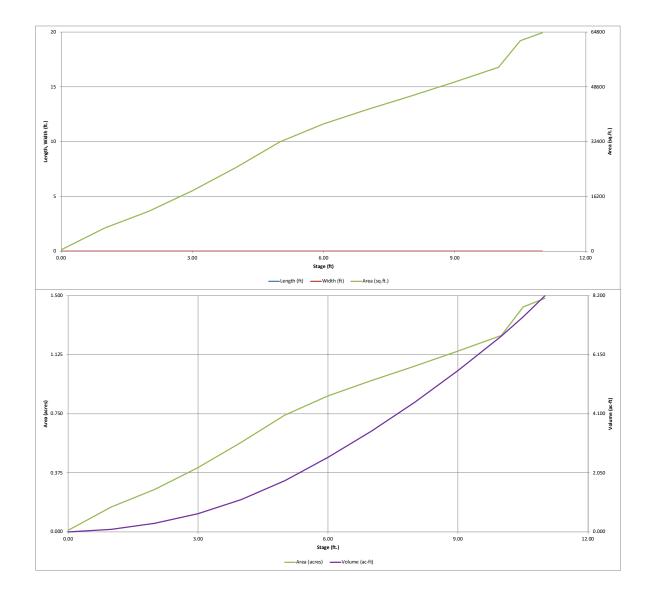

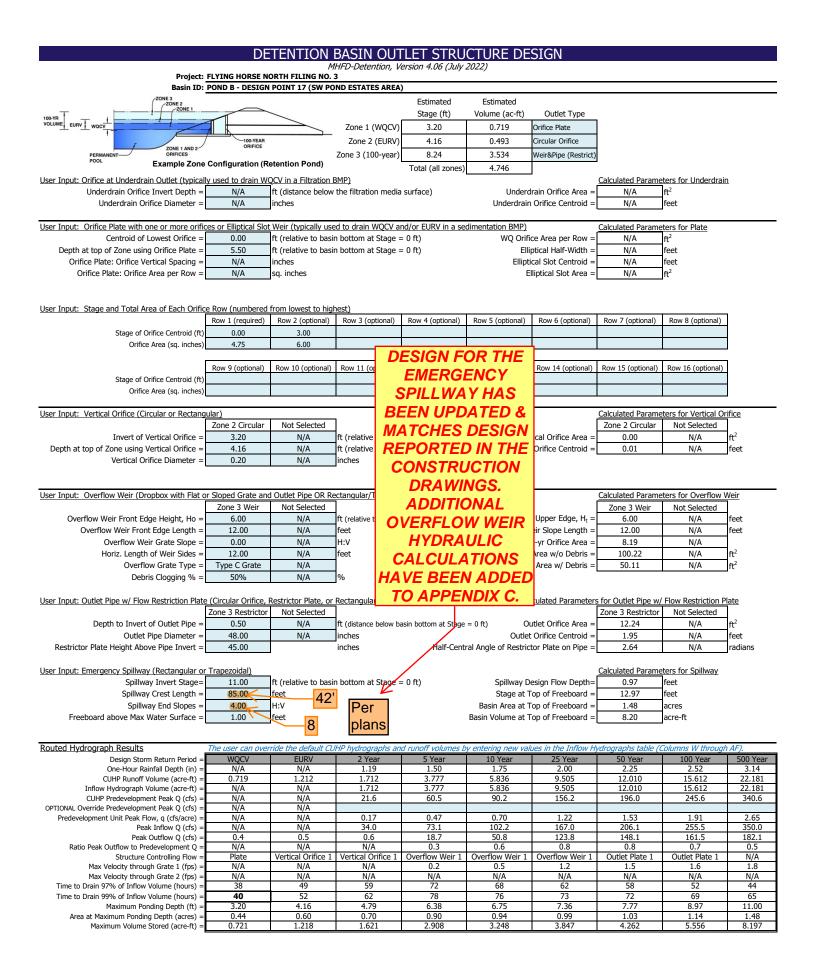

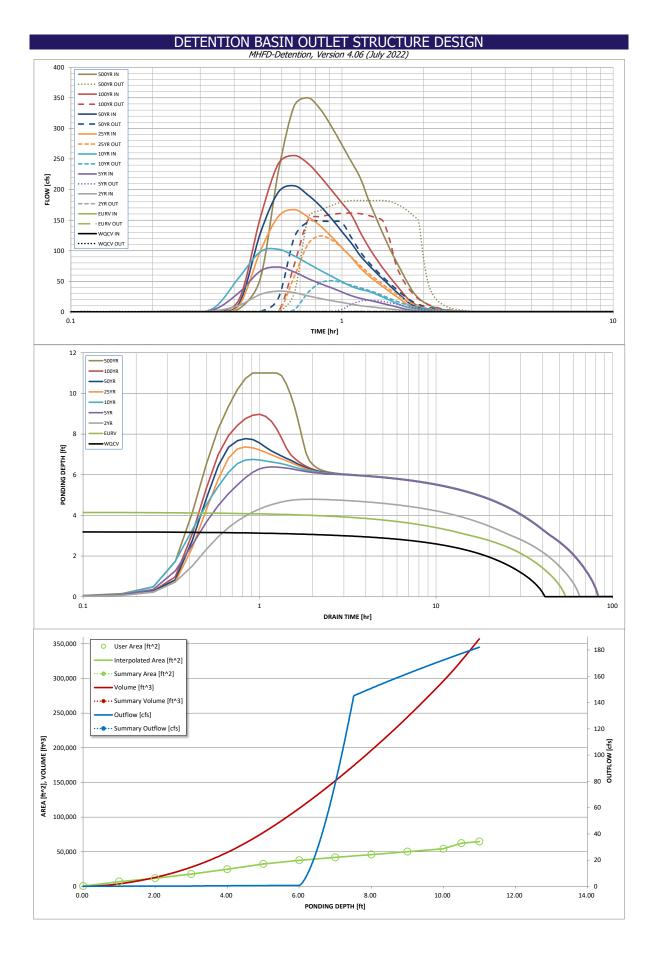

DETENTION BASIN OUTLET STRUCTURE DESIGN Outflow Hydrograph Workbook Filename: Inflow Hydrographs The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program SOURCE CUHP CUHP CUHP CUHP CUHP CUHP CUHP CUHP CUHP Time Interval TIME WQCV [cfs] EURV [cfs] 2 Year [cfs] 5 Year [cfs] 10 Year [cfs] 25 Year [cfs] 50 Year [cfs] 100 Year [cfs] 500 Year [cfs] 5.00 min 0:00:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0:05:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0:10:00 0.00 0.00 0.00 0.00 0.00 0.00 0.04 0.00 0.11 0:15:00 0.54 0.00 0.00 0.31 0.51 0.63 0.43 0.52 0.78 0:20:00 0.00 0.00 1.21 2.95 5.26 1.21 1.42 1.51 4.98 0:25:00 0.00 0.00 10.68 31.36 55.82 10.14 13.30 19.55 54.54 0:30:00 0.00 0.00 28.42 66.78 98.24 99.45 128.55 154.20 230.29 0:35:00 33.98 0.00 0.00 73.15 102.23 156.12 195.91 242.38 336.87 0:40:00 0.00 0.00 31.23 65.13 91.38 167.03 206.14 255.53 349.97 0:45:00 0.00 0.00 26.10 54.48 79.00 155.12 190.98 242.47 330.99 0:50:00 0.00 46.03 67.71 0.00 21.53 140.15 172.64 220.73 302.46 0:55:00 0.00 0.00 18.23 39.06 58.09 122.53 151.98 198.55 273.07 1:00:00 0.00 0.00 15.28 32.32 49.23 104.82 131.10 177.90 245.38 1:05:00 0.00 0.00 12.59 26.33 41.63 88,96 112.21 158.58 219.77 1:10:00 0.00 0.00 10.20 22.16 36.87 72.26 92.16 130.72 184.53 1:15:00 0.00 0.00 8.53 19.20 33.63 59.86 77.41 107.13 154.57 1:20:00 0.00 0.00 7.16 16.31 29.08 49.68 64.52 87.81 127.57 1:25:00 0.00 0.00 5 93 13 56 23.88 40.98 53 21 71 37 103 66 1:30:00 0.00 0.00 4.73 10.92 18.95 32.94 42.85 57.26 83.12 1:35:00 44.28 0.00 0.00 3.56 8.38 14.35 25.48 33.28 64.35 1:40:00 0.00 0.00 2.43 5 66 10 13 18.37 24.23 32 16 47 03 1:45:00 0.00 0.00 1.53 3.55 7.20 11.75 15.84 21.26 32.02 1:50:00 2.48 22.22 0.00 0.00 1.09 5.63 7.42 10.47 14.13 1:55:00 0.00 0.00 0.87 1.95 4.59 4.93 7.35 9.78 16.10 2:00:00 0.00 0.00 0.73 1.60 3.70 3.44 5.43 6.88 11.94 2:05:00 0.00 0.00 0.57 1.24 2.88 2.31 3.82 4.59 8.37 2:10:00 0.00 0.00 0.43 0.93 2.17 1.55 2.64 2.88 5.55 2:15:00 0.00 0.00 0.32 0.69 1.59 1.03 1.80 1.68 3.50 2:20:00 0.92 0.00 0.00 0.24 0.51 1.13 0.66 1.20 2.13 2:25:00 0.00 0.00 0.18 0.37 0.45 0.83 0.60 1.42 0.78 2:30:00 0.00 0.14 0.32 0.99 0.00 0.27 0.53 0.58 0.44 2:35:00 0.00 0.00 0.11 0.19 0.37 0.22 0.33 0.73 0.41 2:40:00 0.00 0.00 0.08 0.13 0.28 0.16 0.30 0.25 0.55 2:45:00 0.00 0.00 0.06 0.09 0.20 0.12 0.23 0.19 0.42 2:50:00 0.00 0.00 0.04 0.05 0.14 0.09 0.16 0.14 0.30 2:55:00 0.00 0.00 0.03 0.03 0.09 0.06 0.11 0.09 0.21 3:00:00 0.00 0.00 0.02 0.02 0.05 0.04 0.07 0.06 0.13 3:05:00 0.00 0.04 0.00 0.01 0.01 0.02 0.02 0.03 0.07 3:10:00 0.00 0.00 0.00 0.00 0.01 0.01 0.02 0.01 0.03 3:15:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:20:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:25:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:30:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:35:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:40:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:45:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:50:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 3:55:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:00:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:05:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:10:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:15:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:20:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:25:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:30:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:35:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:40:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:45:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:50:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 4:55:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 5:00:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 5:05:00 5:10:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 5:15:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 5:20:00 5:25:00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00

5:30:00

5:35:00

5:40:00

5:45:00

5:50:00

5:55:00

6:00:00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.0

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.00

0.0

0.00

0.00

0.00

0.00

0.00

0.00


0.00

	Design Procedure Form:	Extended Detention Basin (EDB)
·		(Version 3.07, March 2018) Sheet 1 of 3
Designer:	Richard Lyon, PE	
Company:	HR Green March 1, 2024	
Date: Project:	March 1, 2024 Flying Horse North Filing 3 - Pond B	
Location:	El Paso County, Colorado	
1. Basin Storage \	/olume	
A) Effective Imp	erviousness of Tributary Area, I _a	l _a = <u>10.1</u> %
B) Tributary Are	a's Imperviousness Ratio (i = I _a / 100)	i = 0.101
C) Contributing	Watershed Area	Area = 128.400 ac
D) For Watersh	neds Outside of the Denver Region, Depth of Average	d ₆ = 0.42 in
	ucing Storm	
E) Design Cond (Select EUR)	cept V when also designing for flood control)	Water Quality Capture Volume (WQCV) Excess Urban Runoff Volume (EURV)
	me (WQCV) Based on 40-hour Drain Time I.0 * (0.91 * i ³ - 1.19 * i ² + 0.78 * i) / 12 * Area)	V _{DESIGN} = ac-ft
Water Quali	neds Outside of the Denver Region, ty Capture Volume (WQCV) Design Volume $_{\rm R}$ = (d_6*(V _{DESIGN} /0.43))	V _{DESIGN OTHER} =ac-ft
	f Water Quality Capture Volume (WQCV) Design Volume ferent WQCV Design Volume is desired)	V _{DESIGN USER} =0.719ac-ft
i) Percenta ii) Percenta	logic Soil Groups of Tributary Watershed ge of Watershed consisting of Type A Soils age of Watershed consisting of Type B Soils age of Watershed consisting of Type C/D Soils	$HSG_{A} = \frac{0}{100} \%$ $HSG_{B} = \frac{100}{\%} \%$ $HSG_{OD} = \frac{0}{\%} \%$
For HSG A For HSG B	In Runoff Volume (EURV) Design Volume : EURV _A = 1.68 * i ^{1.28} : EURV _B = 1.36 * i ^{1.08} /D: EURV _{CD} = 1.20 * i ^{1.08}	EURV _{DESIGN} = ac-f t
	f Excess Urban Runoff Volume (EURV) Design Volume ferent EURV Design Volume is desired)	EURV _{DESIGN USER} = 1.212 ac-ft
	angth to Width Ratio to width ratio of at least 2:1 will improve TSS reduction.)	L : W = 2.0 : 1
3. Basin Side Slop	es	
	num Side Slopes	7- 400 8/8
,	distance per unit vertical, 4:1 or flatter preferred)	Z = 4.00 ft / ft
4. Inlet		Upstream roadside swales will be piped to a Rock Chute (rip-rap rundown) to the forebay. All other flows will enter as sheet flow, there are no concentrated flows other than the chute.
 A) Describe me inflow location 	eans of providing energy dissipation at concentrated	
innow locate	פווע.	
5. Forebay		
A) Minimum Fo (V _{EMIN}	rebay Volume = 3% of the WQCV)	V _{FMIN} = 0.022 ac-ft
B) Actual Fore		V _F = 0.022 ac-ft
C) Forebay Dep (D _F		D _F = 18.0 in
D) Forebay Disc		
	ad 100-year Peak Discharge	Q ₁₀₀ = 255.50 cfs
	Discharge Design Flow	$Q_{\rm F} = 5.11$ cfs
E) Forebay Disc	sharge Design	Choose One Berm With Pipe Wall with Rect. Notch Wall with V-Notch Weir
F) Discharge Pi	pe Size (minimum 8-inches)	Calculated D _P = In
G) Rectangular	Notch Width	Calculated W _N = 13.6 in

UD-BMP_v3.07_Pond B, EDB

	Design Procedure Form: I	Extended Detention Basin (EDB)	
Designer:	Richard Lyon, PE		Sheet 2 of 3
Company:	HR Green		
Date:	March 1, 2024		
Project:	Flying Horse North Filing 3 - Pond B		
Location:	El Paso County, Colorado		
6. Trickle Channe	1	Choose One	
A) Type of Tric	kle Channel	SLO	R A CONCRETE TRICKLE CHANNEL, DPE SHOULD BE BETWEEN 4 AND 0.010 FT/FT.
F) Slope of Tri	ckle Channel	S = 0.0250 ft / ft	
7. Micropool and	Outlet Structure		
A) Depth of Mi	cropool (2.5-feet minimum)	D _M = 2.5 ft	
B) Surface Are	a of Micropool (10 ft ² minimum)	A _M = 50 sq ft	
C) Outlet Type		Choose One Orifice Plate Other (Describe):	
D) Smallest Di (Use UD-Deter	mension of Orifice Opening Based on Hydrograph Routing ttion)	D _{crifice} =inches	
E) Total Outlet	Area	A _{ot} =square inches	3
8. Initial Surcharg	e Volume		
	tial Surcharge Volume commended depth is 4 inches)	D _{IS} = <u>6</u> in	
	tial Surcharge Volume olume of 0.3% of the WQCV)	V _{IS} = <u>94</u> cu ft	
C) Initial Surcha	arge Provided Above Micropool	V _s = 25.0 cu ft	
9. Trash Rack			
A) Water Qual	ity Screen Open Area: $A_t = A_{ot} * 38.5*(e^{-0.095D})$	A _t =square inches	3
in the USDCM,	een (If specifying an alternative to the materials recommended indicate "other" and enter the ratio of the total open are to the e for the material specified.)		
	Other (Y/N): N		
C) Ratio of Tota	al Open Area to Total Area (only for type 'Other')	User Ratio =	
D) Total Water	Quality Screen Area (based on screen type)	A _{total} =sq. in.	
	sign Volume (EURV or WQCV) design concept chosen under 1E)	H=feet	
F) Height of Wa	ater Quality Screen (H_{TR})	H _{TR} = inches	
	ater Quality Screen Opening (W _{opening}) ? inches is recommended)	W _{opening} = inches	


	Design Procedure Form:	Extended Detention Basin (EDB)						
Designer: Company: Date: Project: Location:	Richard Lyon, PE HR Green March 1, 2024 Flying Horse North Filing 3 - Pond B El Paso County, Colorado							
B) Slope of O	ankment mbankment protection for 100-year and greater overtopping: verflow Embankment distance per unit vertical, 4:1 or flatter preferred)	Soil rip-rap Ze = 4.00 ft / ft						
11. Vegetation		Choose One O Irrigated Not Irrigated						
12. Access								
	ediment Removal Procedures	15' width maintenance path from cul-de-sac with max 2.0% cross slope and max 15% longitudinal slope provided to access forebay and outlet structure.						
Notes:								

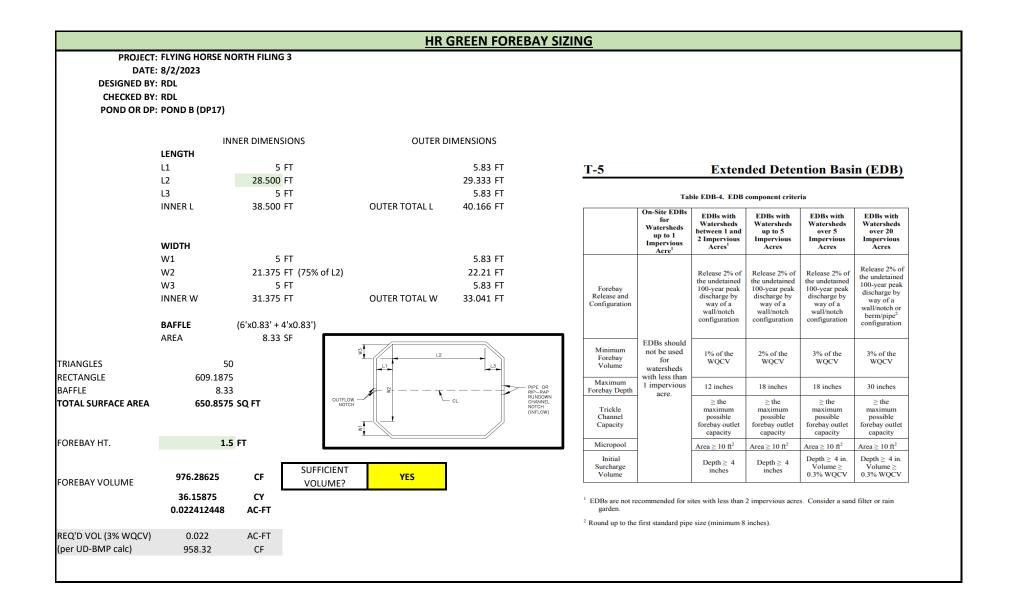


MHFD-Detention, Version 4.06 (July 2022)																
Project: FLYING HORSE NORTH FILING NO. 3 Basin ID: POND 8 (FULL-BUILD OUT)																
/ZONE 3 /ZONE 2 /ZONE 1																
100 YM																
Depth Increment = t																
PERMANENT ORIFIC	Stage - Storage	Stage	Optional Override	Length	Width	Area	Optional Override	Area	Volume	Volume						
Watershed Information 7369.5					Description Top of Micropool	(ft) 	Stage (ft) 0.00	(ft)	(ft) 	(ft ²)	Area (ft ²) 384	(acre) 0.009	(ft 3)	(ac-ft)		
Selected BMP Type =	EDB			/305.3	7370		0.50				384	0.009	192	0.004		
Watershed Area =	248.90	acres			7372		2.50				18,082	0.415	18,658	0.428		
Watershed Length = Watershed Length to Centroid =	5,500 2,500	ft ft			7374 7376		4.50 6.50	-			40,004 61,465	0.918	76,744 178,213	1.762 4.091		
Watershed Slope =	0.017	ft/ft			7378		8.50	-			69,433	1.594	309,111	7.096		
Watershed Imperviousness = Percentage Hydrologic Soil Group A =	8.79% 0.0%	percent percent			7380 7382		10.50 12.50				77,895 88,522	1.788 2.032	456,439 622,856	10.478 14.299		
Percentage Hydrologic Soil Group B =	100.0%	percent			7502		12.50				00,522	LIUGE	022,050	1 11255		
Percentage Hydrologic Soil Groups C/D =	0.0%	percent hours														
Target WQCV Drain Time = Location for 1-hr Rainfall Depths =		тн							'ES							
After providing required inputs above inc																
depths, click "Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure. Optional User Overrides					THE AS-BUILT CONDITIONS OF											
Water Quality Capture Volume (WQCV) = 1.244 ac				acre-feet		PC	ND	8 IN	FIL I	NG I	NO.	1 W	ТН			
Excess Urban Runoff Volume (EURV) =	2.035	acre-feet acre-feet	1.19	acre-feet		-		-		-	-					
2-yr Runoff Volume (P1 = 1.19 in.) = 5-yr Runoff Volume (P1 = 1.5 in.) =				inches inches		СНА	-	-	-			-	HED			
10-yr Runoff Volume (P1 = 1.75 in.) = 11.036 acre-feet 1.75			1.75	inches			AR	REA	AND	PEI	RCE	NT				
25-yr Runoff Volume (P1 = 2 in.) = 50-yr Runoff Volume (P1 = 2.25 in.) =	18.224 23.083	acre-feet acre-feet	2.00	inches inches		1					-		,			
100-yr Runoff Volume (P1 = 2.52 in.) =	30.120	acre-feet	2.25	inches		IMPERVIOUSNESS ONLY.										
500-yr Runoff Volume (P1 = 3.14 in.) =	42.887	acre-feet		inches												
Approximate 2-yr Detention Volume = Approximate 5-yr Detention Volume =	1.282 2.033	acre-feet acre-feet														
Approximate 10-yr Detention Volume =	4.473	acre-feet														
Approximate 25-yr Detention Volume = Approximate 50-yr Detention Volume =	6.375 6.643	acre-feet acre-feet														
Approximate 30-yr Detention Volume = Approximate 100-yr Detention Volume =	8.649	acre-feet														
Define Zones and Basin Geometry Zone 1 Volume (WQCV) =	1.244	acre-feet														
Zone 2 Volume (EURV - Zone 1) =	0.791	acre-feet														
Zone 3 Volume (100-year - Zones 1 & 2) =	6.614	acre-feet														
Total Detention Basin Volume = Initial Surcharge Volume (ISV) =	8.649 user	acre-feet ft ³														
Initial Surcharge Depth (ISD) =	user	ft						-								
Total Available Detention Depth (H _{total}) = Depth of Trickle Channel (H _{TC}) =	user	ft ft														
Slope of Trickle Channel $(S_{TC}) =$	user	ft/ft														
Slopes of Main Basin Sides (S _{main}) =	user	H:V														
Basin Length-to-Width Ratio $(R_{L/W}) =$	user															
Initial Surcharge Area $(A_{ISV}) =$	user	ft²														
Surcharge Volume Length (L_{ISV}) = Surcharge Volume Width (W_{ISV}) =	user	ft ft														
Depth of Basin Floor (H_{FLOOR}) =	user	ft														
Length of Basin Floor $(L_{FLOOR}) =$	user	ft														
Width of Basin Floor (W _{FLOOR}) = Area of Basin Floor (A _{FLOOR}) =	user user	ft ft²														
Volume of Basin Floor (V _{FLOOR}) =	user	ft ³														
Depth of Main Basin $(H_{MAIN}) =$ Length of Main Basin $(L_{MAIN}) =$	user	ft ft														
Width of Main Basin (W_{MAIN}) =	user	ft														
Area of Main Basin (A _{MAIN}) =	user	ft ²														
Volume of Main Basin (V_{MAIN}) = Calculated Total Basin Volume (V_{total}) =	user user	ft ³ acre-feet														
								-	-							
								-								
								1 1								
								1 1								
								1 1								
							1				1	1	1			


DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.06 (July 2022)

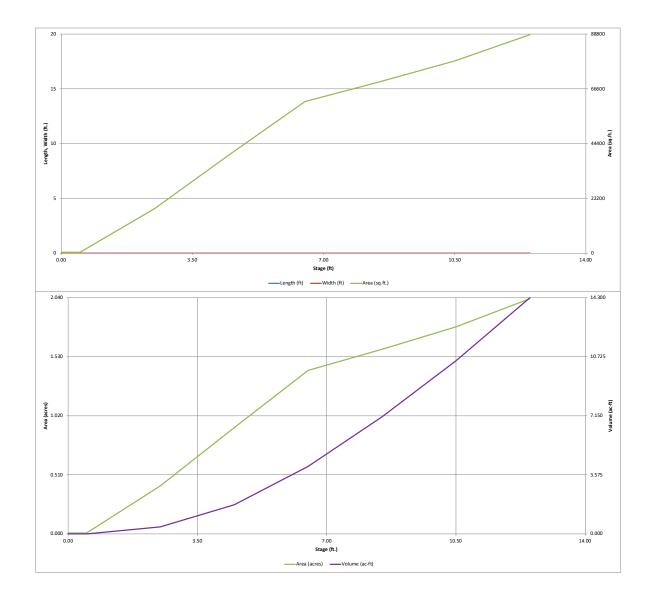

THIS CALCULATION UTILIZES THE AS-BUILT CONDITIONS OF POND 8 IN FILING NO. 1 WITH CHANGES TO THE WATERSHED AREA AND PERCENT IMPERVIOUSNESS ONLY. AS-BUILT CONDITIONS FOR THE OUTLET STRUCTURE ARE SHOWN BELOW AND CHANGES TO WQCV, EURV, AND 100-YEAR RELEASE RATES AND TIME DEVIATE SLIGHTLY FROM THE ORIGINAL DESIGN IN THE 2018 CLASSIC CONSULTING FDR/PDR DUE TO LESS WATERSHED AREA AND PERCENT IMPERVIOUSNESS.

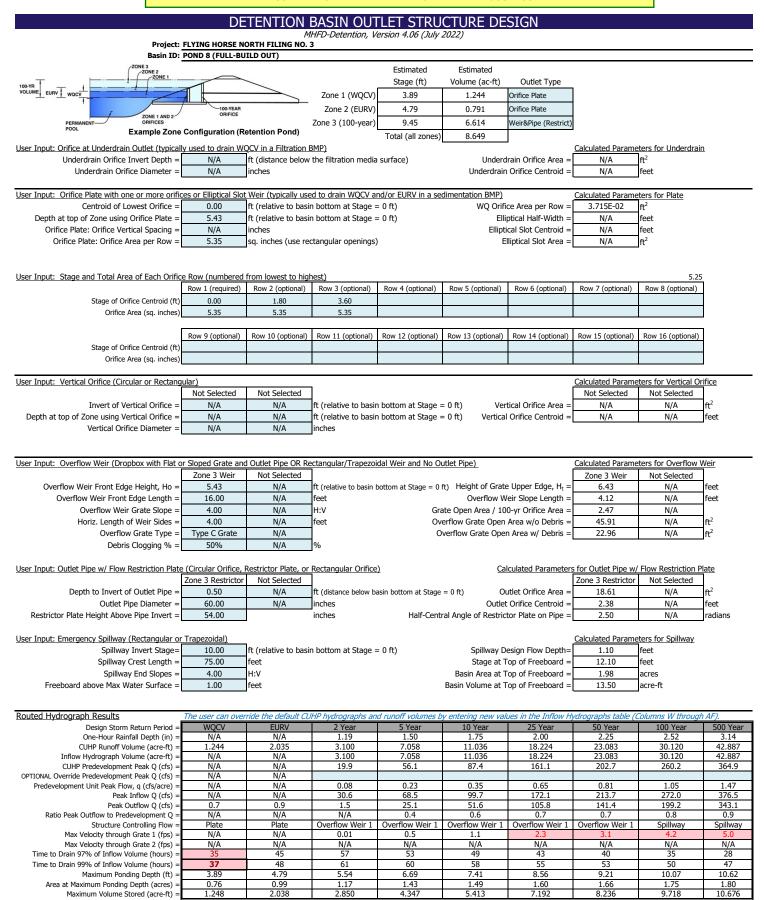

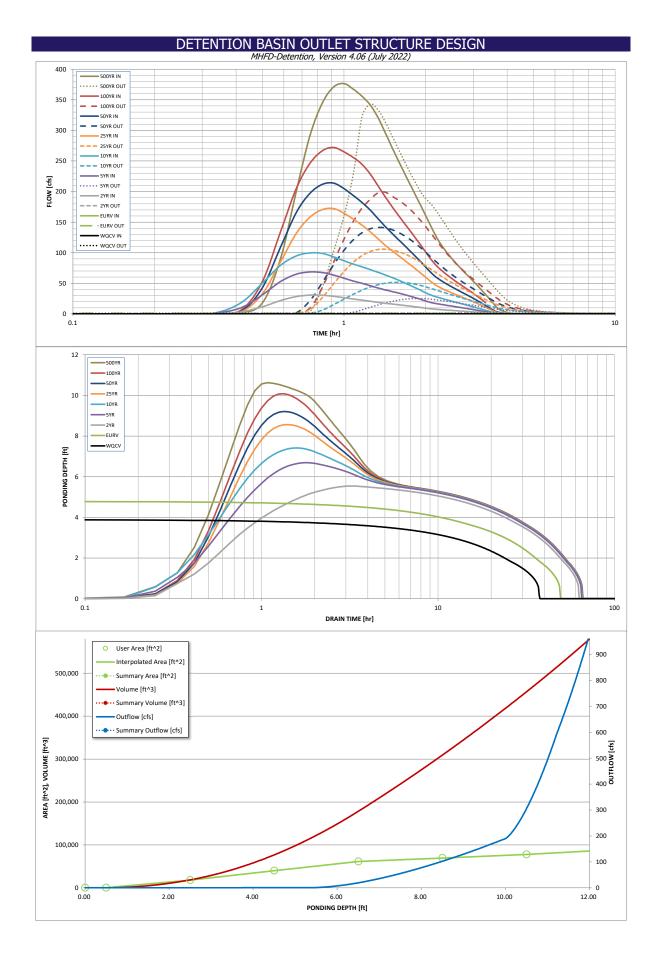

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename:

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

	The user can o	verride the calcu	ulated inflow hy	drographs from	this workbook v	with inflow hydro	ographs develop	oed in a separate	program.	
	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
Time Interval	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.03
	0:15:00	0.00	0.00	0.07	0.12	0.14	0.10	0.13	0.12	0.21
	0:20:00	0.00	0.00	0.36	0.89	1.53	0.40	0.49	0.51	1.53
	0:25:00	0.00	0.00	3.14	9.79	17.86	3.06	3.99	5.87	17.59
	0:30:00	0.00	0.00	11.55	30.95	50.07	32.69	42.54	52.66	89.66
	0:35:00	0.00	0.00	21.73	52.71	79.26	85.10	108.79	134.03	200.11
	0:40:00	0.00	0.00	28.31	64.92	94.61	131.48	165.51	204.86	292.04
	0:45:00	0.00	0.00	30.61	68.51	99.73	158.19	197.26	246.41	345.32
	0:50:00 0:55:00	0.00	0.00	30.36 28.65	67.43 63.37	98.75	170.53 172.13	211.86 213.72	266.92 271.98	371.14 376.54
	1:00:00	0.00	0.00	26.29	58.15	93.21 86.71	164.62	204.72	264.93	367.28
	1:05:00	0.00	0.00	26.29	53.65	81.42	154.77	193.42	255.65	355.73
	1:10:00	0.00	0.00	22.41	49.78	76.77	144.93	182.14	244.46	341.58
	1:15:00	0.00	0.00	20.60	45.99	72.28	134.26	169.64	228.60	321.45
	1:20:00	0.00	0.00	18.82	42.36	67.97	122.92	156.00	209.89	297.28
	1:25:00	0.00	0.00	17.30	39.30	63.83	112.56	143.29	191.99	273.39
	1:30:00	0.00	0.00	16.05	36.68	59.60	103.73	132.25	176.22	251.52
	1:35:00	0.00	0.00	14.88	34.17	55.28	95.61	121.98	161.81	231.20
	1:40:00	0.00	0.00	13.76	31.62	50.98	88.00	112.32	148.66	212.45
	1:45:00	0.00	0.00	12.65	28.99	46.75	80.73	103.09	136.28	194.74
	1:50:00	0.00	0.00	11.54	26.33	42.62	73.68	94.17	124.32	177.70
	1:55:00 2:00:00	0.00	0.00	10.43 9.32	23.67	38.55	66.74 59.92	85.41	112.69	161.18
	2:05:00	0.00	0.00	9.32	21.04 18.75	34.48 30.99	59.92	76.81 68.37	101.38 90.39	145.15 129.89
	2:10:00	0.00	0.00	7.52	17.10	28.39	47.68	61.40	81.20	117.19
	2:15:00	0.00	0.00	6.96	15.85	26.25	43.51	56.11	74.09	107.07
	2:20:00	0.00	0.00	6.47	14.73	24.29	40.06	51.66	68.05	98.34
	2:25:00	0.00	0.00	6.01	13.66	22.45	37.01	47.68	62.65	90.47
	2:30:00	0.00	0.00	5.56	12.63	20.68	34.24	44.05	57.74	83.26
	2:35:00	0.00	0.00	5.13	11.63	18.98	31.64	40.65	53.16	76.55
	2:40:00	0.00	0.00	4.70	10.65	17.34	29.13	37.39	48.88	70.28
	2:45:00	0.00	0.00	4.29	9.69	15.76	26.73	34.28	44.89	64.43
	2:50:00	0.00	0.00	3.89	8.75	14.23	24.37	31.25	41.03	58.81
	2:55:00 3:00:00	0.00	0.00	3.48	7.83	12.76	22.04	28.27	37.20	53.29
	3:05:00	0.00	0.00	3.08 2.69	6.91 6.01	11.32 9.90	19.73 17.42	25.32 22.38	33.39 29.58	47.81 42.35
	3:10:00	0.00	0.00	2.69	5.11	9.90 8.48	17.42	19.46	29.36	36.90
	3:15:00	0.00	0.00	1.90	4.21	7.07	12.83	16.53	21.97	31.46
	3:20:00	0.00	0.00	1.50	3.33	5.67	10.54	13.62	18.18	26.03
	3:25:00	0.00	0.00	1.11	2.44	4.27	8.25	10.71	14.39	20.61
	3:30:00	0.00	0.00	0.73	1.58	2.92	5.97	7.82	10.62	15.25
	3:35:00	0.00	0.00	0.42	0.93	1.99	3.76	5.02	6.99	10.33
	3:40:00	0.00	0.00	0.25	0.62	1.49	2.32	3.23	4.57	7.05
	3:45:00	0.00	0.00	0.18	0.47	1.17	1.47	2.17	3.07	4.94
	3:50:00	0.00	0.00	0.14	0.37	0.93	0.96	1.48	2.04	3.43
	3:55:00 4:00:00	0.00	0.00	0.11	0.29	0.73	0.62	1.00	1.31	2.32
	4:00:00	0.00	0.00	0.09	0.23	0.57	0.41	0.69	0.80	1.52 0.93
	4:10:00	0.00	0.00	0.07	0.18	0.43	0.27	0.47	0.44	0.93
	4:15:00	0.00	0.00	0.04	0.10	0.22	0.12	0.22	0.15	0.37
	4:20:00	0.00	0.00	0.04	0.07	0.15	0.08	0.16	0.12	0.27
	4:25:00 4:30:00	0.00	0.00	0.03	0.05	0.11 0.08	0.06	0.12 0.09	0.09 0.07	0.21 0.17
	4:35:00	0.00	0.00	0.02	0.04	0.08	0.03	0.09	0.07	0.17
	4:40:00	0.00	0.00	0.01	0.01	0.04	0.02	0.05	0.04	0.09
	4:45:00	0.00	0.00	0.01	0.01	0.03	0.02	0.03	0.03	0.06
	4:50:00 4:55:00	0.00 0.00	0.00	0.00	0.01 0.00	0.01	0.01	0.02 0.01	0.02 0.01	0.04 0.02
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
	5:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00 5:15:00	0.00 0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00 0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00 5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ļ	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



Flying Horse North Filing No. 3 Final Drainage Report Project No.: 211030.20

El Paso County, Colorado

APPENDIX E

REFERNCE MATERIALS



Publication No. FHWA-NHI-05-114 September 2005

U.S. Department of Transportation

Federal Highway Administration

Hydraulic Engineering Circular No. 15, Third Edition

Design of Roadside Channels with Flexible Linings



			Manning's n	1
Lining Category	Lining Type	Maximum	Typical	Minimum
	Concrete	0.015	0.013	0.011
	Grouted Riprap	0.040	0.030	0.028
Rigid	Stone Masonry	0.042	0.032	0.030
	Soil Cement	0.025	0.022	0.020
	Asphalt	0.018	0.016	0.016
Unlined	Bare Soil ²	0.025	0.020	0.016
Unimed	Rock Cut (smooth, uniform)	0.045	0.035	0.025
	Open-weave textile	0.028	0.025	0.022
RECP	Erosion control blankets	0.045	0.035	0.028
	Turf reinforcement mat	0.036	0.030	0.024

Table 2.1. Typical Roughness Coefficients for Selected Linings

¹Based on data from Kouwen, et al. (1980), Cox, et al. (1970), McWhorter, et al. (1968) and Thibodeaux (1968).

²Minimum value accounts for grain roughness. Typical and maximum values incorporate varying degrees of form roughness.

Table 2.2. Typical Roughness Coefficients for Riprap, Cobble, and Gravel Linings

			Manning's n for Selected Flow Depths ¹		
Lining Category	Lining Type	0.15 m (0.5 ft)	0.50 m (1.6 ft)	1.0 m (3.3 ft)	
Gravel Mulch	D ₅₀ = 25 mm (1 in.)	0.040	0.033	0.031	
Graver Mulch	D ₅₀ = 50 mm (2 in.)	0.056	0.042	0.038	
Cobbles	D ₅₀ = 0.10 m (0.33 ft)	 ²	0.055	0.047	
Dook Diprop	D ₅₀ = 0.15 m (0.5 ft)	 ²	0.069	0.056	
Rock Riprap	D ₅₀ = 0.30 m (1.0 ft)	²	²	0.080	

¹Based on Equation 6.1 (Blodgett and McConaughy, 1985). Manning's n estimated assuming a trapezoidal channel with 1:3 side slopes and 0.6 m (2 ft) bottom width.

²Shallow relative depth (average depth to D_{50} ratio less than 1.5) requires use of Equation 6.2 (Bathurst, et al., 1981) and is slope-dependent. See Section 6.1.

2.2 SHEAR STRESS

2.2.1 Equilibrium Concepts

Most highway drainage channels cannot tolerate bank instability and possible lateral migration. Stable channel design concepts focus on evaluating and defining a channel configuration that will perform within acceptable limits of stability. Methods for evaluation and definition of a stable configuration depend on whether the channel boundaries can be viewed as:

- essentially rigid (static)
- movable (dynamic).

In the first case, stability is achieved when the material forming the channel boundary effectively resists the erosive forces of the flow. Under such conditions the channel bed and banks are in

protected. Therefore permissible shear stress is not significantly affected by the erodibility of the underlying soil. However, if the lining moves, the underlying soil will be exposed to the erosive force of the flow.

Table 2.3 provides typical examples of permissible shear stress for selected lining types. Representative values for different soil types are based on the methods found in Chapter 4 while those for gravel mulch and riprap are based on methods found in Chapter 7. Vegetative and RECP lining performance relates to how well they protect the underlying soil from shear stresses so these linings do not have permissible shear stresses independent of soil types. Chapters 4 (vegetation) and 5 (RECPs) describe the methods for analyzing these linings. Permissible shear stress for gabion mattresses depends on rock size and mattress thickness as is described in Section 7.2.

		Permissible	Shear Stress
Lining Category	Lining Type	N/m ²	lb/ft ²
Bare Soil ¹	Clayey sands	1.8-4.5	0.037-0.095
Cohesive (PI = 10)	Inorganic silts	1.1-4.0	0.027-0.11
Collesive (FI = 10)	Silty sands	1.1-3.4	0.024-0.072
	Clayey sands	4.5	0.094
Bare Soil ¹	Inorganic silts	4.0	0.083
Cohesive (PI <u>></u> 20)	Silty sands	3.5	0.072
	Inorganic clays	6.6	0.14
	Finer than coarse sand	1.0	0.02
	D ₇₅ <1.3 mm (0.05 in)		
Bare Soil ²	Fine gravel	5.6	0.12
Non-cohesive (PI < 10)	D ₇₅ =7.5 mm (0.3 in)		
	Gravel	11	0.24
	D ₇₅ =15 mm (0.6 in)		
	Coarse gravel	19	0.4
Gravel Mulch ³	D ₅₀ = 25 mm (1 in)		
	Very coarse gravel	38	0.8
	D ₅₀ = 50 mm (2 in)		
Rock Riprap ³	D ₅₀ = 0.15 m (0.5 ft)	113	2.4
	D ₅₀ = 0.30 m (1.0 ft)	227	4.8

Table 2.3. Tv	pical Permissible	Shear Stresses for	r Bare Soil and Stone Linir	nas

¹Based on Equation 4.6 assuming a soil void ratio of 0.5 (USDA, 1987).

²Based on Equation 4.5 derived from USDA (1987)

³Based on Equation 6.7 with Shield's parameter equal to 0.047.

2.3 DESIGN PARAMETERS

2.3.1 Design Discharge Frequency

Design flow rates for permanent roadside and median drainage channel linings usually have a 5 or 10-year return period. A lower return period flow is allowable if a transitional lining is to be used, typically the mean annual storm (approximately a 2-year return period, i.e., 50 percent probability of occurrence in a year). Transitional channel linings are often used during the establishment of vegetation. The probability of damage during this relatively short time is low,

TABLE 10-1

COMPOSITE ROUGHNESS COEFFICIENTS FOR UNLINED OPEN CHANNELS (Reference: Chow, Ven Te, 1959; <u>Open-Channel Hydraulics)</u>

$n = (n_0 + n_1 + n_2 + n_3)$	+ n ₄)m	(10-2)
	Channel Conditions	Value
Material Type	Earth Fine Gravel	0.020 0.024
no	Coarse Gravel	0.028
Degree of Irregularity	Smooth Minor	0.000 0.005
m	Moderate	0.010
nı	Severe	0.020
Variation of Channel	Gradual	0.000
Cross Section ⁿ 2	Alternating Occasionally Alternating	0.005
	Frequently	0.010 - 0.015
Relative Effect	Negligible	0.000
of Obstructions	Minor	0.010 - 0.015
n ₃	Appreciable	0.020 - 0.030
3	Severe	0.040 - 0.060
Vegetation	Low	0.005 - 0.010
-	Medium	0.010 - 0.025
n ₄	High	0.025 - 0.050
*	Very High	0.050 - 0.100
Degree of Meandering	Minor	1.000 - 1.200
	Appreciable	1.200 - 1.500
m	Severe	1.500

- significant uncertainty regarding the design discharge
- consequences of failure are high

The basic procedure for flexible lining design consists of the following steps and is summarized in Figure 3.1. (An alternative process for determining an allowable discharge given slope and shape is presented in Section 3.6.)

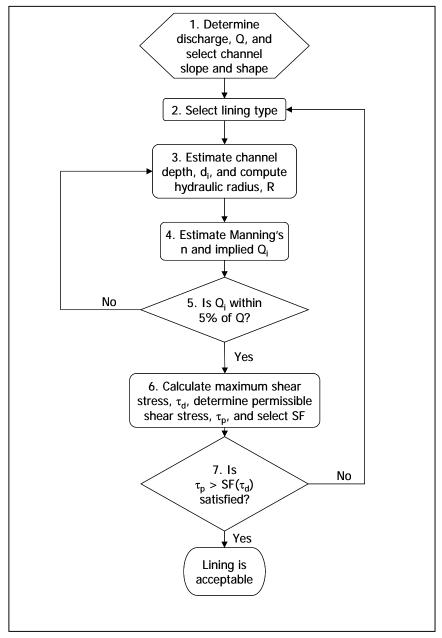


Figure 3.1. Flexible Channel Lining Design Flow Chart



ROLLED EROSION CONTROL

SYSTEMS BROCHURE







Temporary RollMax[™] Solutions

Erosion control has never been so simple yet effective. North American Green RollMax[™] temporary Erosion Control Blankets (ECBs) provide immediate erosion protection and vegetation establishment assistance, then degrade once the vegetation's root and stem systems are mature enough to stabilize the soil.

Our high-quality temporary solutions are available in varying functional longevities and materials:

- Short-term photodegradable blankets with a functional longevity of 45 days up to 12 months
- Extended-term and long-term photodegradable blankets for protection up to 36 months
- Short-term biodegradable blankets for protection up to 12 months
- Extended-term and long-term biodegradable products for protection and mulching from 18 to 24 months

ERONET[™] EROSION CONTROL BLANKETS

North American Green EroNet[™] ECBs incorporate photodegradable nettings, which means they are broken down by the ultraviolet rays in sunlight. These temporary products can be used in a variety of scenarios, including moderate to steep slopes, medium-to high-flow channels, shorelines and other areas needing protection until permanent vegetation establishment.

EroNet[™] C125[®] Long-Term Photodegradable Double-Net Coconut Blanket

The C125° ECB is made of 100% coconut fiber stitched between heavyweight UV-stabilized polypropylene nets. It offers excellent durability, erosion control and longevity for severe slopes, steep embankments, high-flow channels and other areas where vegetation may take up to 36 months to grow in.





The EroNet temporary ECBs are designed to provide immediate erosion protection and vegetation establishment assistance, and then degrade after the vegetation is mature enough to permanently stabilize the underlying soil. Both short-term and extended-term ECBs are available.



EroNet[™] SC150[®] Extended-Term Photodegradable Double-Net Straw/Coconut Blanket

With a layer of 70% straw and 30% coconut fiber stitched between a heavyweight UV-stabilized polypropylene top net and a lightweight photodegradable polypropylene bottom net, the SC150° ECB has increased durability, erosion control capabilities and longevity. It is suitable for steeper slopes, medium-flow channels and other areas where it may take vegetation up to 24 months to grow in.

EroNet[™] S150[®] Short-Term Photodegradable Double-Net Straw Blanket

The S150 ECB is made with a 100% straw fiber matrix stitched between lightweight photodegradable polypropylene top and bottom nets. The S150 ECB's double-net construction has greater structural integrity than single net blankets for use on steeper slopes and in channels with moderate water flow. It provides erosion protection and mulching for up to 12 months.

EroNet[™] DS150[™] Ultra Short-Term Photodegradable Double-Net Straw Blanket

The DS150[™] ECB is suitable for high maintenance areas where close mowing will occur soon after installation. Special additives in the thread and top and bottom net ensure it degrades in adequate sunlight within 60 days.

EroNet[™] S75[®] Short-Term Photodegradable Single-Net Straw Blanket

The S75° ECB protects and mulches moderate slopes and low-flow channels in low maintenance areas for up to 12 months. It is constructed of 100% straw fiber stitched with degradable thread to a lightweight photodegradable polypropylene top net.

EroNet[™] DS75[™] Ultra Short-Term Photodegradable Single-Net Straw Blanket

Designed for high maintenance areas where close mowing will occur soon after installation, the DS75[™] ECB degrades within 45 days because of special additives in the thread and top net that facilitate rapid breakdown in adequate sunlight.



Every site has its own unique characteristics and challenges. EroNet Erosion Control Blankets are available in varying longevities to suit a variety of scenarios and conditions.



With our Erosion Control Materials Design Software (ECMDS), you can select either short-term, extended-term or long-term EroNet blankets based on your specific design needs.



Permanent RollMax[™] Solutions

Back in the day, rock riprap, articulated concrete blocks and poured concrete were the only way to deal with erosion in high-flow channels, on shorelines and other areas where water and/or wind exceed the shear limits of unreinforced vegetation.

Not anymore. North American Green permanent Turf Reinforcement Mats (TRMs) use 100% synthetic components or a composite of synthetic and natural materials for long-term erosion protection and vegetation establishment. Whether com-pared to rock riprap or concrete, the RollMax[™] Systems' permanent TRMs offer a number of significant advantages:

- Prevent loss of precious topsoil to wind and water erosion
- Permanently reinforce vegetation root and stem structures
- Provide excellent conditions for quick, healthy vegetation growth
- Stabilize slopes from erosion to keep roadways safe and clean
- Protect water quality in lakes, rivers and streams
- Protect dormant seeding during winter months
- Easily conform to landscape features
- Lightweight for easy handling and transportation



The TRMs easily conform to various landscape features to prevent the loss of precious topsoil.

VMAX® COMPOSITE TURF REINFORCEMENT MATS

VMax[®] C-TRMs combine three-dimensional matting with fiber matrix material for permanent erosion control on severe slopes, spillways, stream banks, shorelines and in high- to extreme-flow channels. These extensively tested products provide maximum performance through all three phases of reinforced vegetative lining development: unvegetated, establishment, and maturity. Incorporating the best performance features of temporary and permanent North American Green erosion control products, VMax C-TRMs deliver these tangible benefits:

- Surface-applied for the highest level of immediate soil protection
- Less than one third of the installed cost of rock or concrete
- No heavy equipment needed to install
- More attractive and effective "Green" alternative than rock riprap or concrete

VMax[®] High-Performance TRMs (HPTRMs)

VMax[®] HPTRMs utilize patent-pending woven 3-D structures that are soil-filled for use in areas experiencing high stress and strain. The VMax HPTRMs are designed to provide appropriate thickness and open area for effective erosion and vegetation reinforcement against high flow induced shear forces. Our HPTRMs are excellent for increased bearing capacity of vegetated soils subjected to heavy loads from maintenance equipment and other vehicular traffic.



The RollMax TRMs are installed in a one-step operation directly over the prepared seedbed saving time and money and ensuring the highest level of erosion control and vegetation reinforcement.

4



VMAx[®] TMaxTM Permanent HPTRM

The TMax HPTRM woven polypropylene technology is designed to provide appropriate thickness and open area for effective erosion and vegetation reinforcement against high flow induced shear forces up to 15 pfs (kN/m2), and with the highest tensile strength on the market up to 5,000 lbs/ft (73 kN/m). TMax maybe used as an alternative to hard armor system in extreme erosion control applications.

VMax® P550® Permanent TRM

P550° TRM has a polypropylene fiber matrix augmenting the permanent netting structure with permanent mulching and erosion control performance. Unvegetated, the P550 TRM reduces soil loss to less than 0.5 in. (12.7 mm) under shear stress up to 4.0 lbs/ft² (191 Pa). The ultra-strong structure drives the vegetated shear resistance up to 14 lbs/ft² (672 Pa). The P550 TRM may be used as an alternative for poured concrete or articulated concrete blocks in extreme erosion control projects.

VMax[®] C350[®] Permanent TRM

A 100% coconut fiber matrix supplements the C350's permanent three-dimensional netting structure with initial mulching and erosion control performance for up to 36 months. Unvegetated, the C350° TRM reduces soil loss to less than 0.5 in. (12.7 mm) under shear stress up to 3.2 lbs/ft² (153 Pa) and boosts permanent vegetation performance up to 12 lbs/ft² (576 Pa). This environmentally friendly alternative to 30 in. (76 cm) or larger rock riprap is ideal for severe erosion control projects.

VMax[®] SC250[®] Permanent TRM

The SC250° permanent TRM has a 70% straw/30% coconut fiber matrix to enhance initial mulching and erosion control performance for up to 24 months. Unvegetated, SC250 TRMs reduce soil loss to less than 0.5 in. (12.7 mm) under shear stress up to 3.0 lbs/ft², and increases permanent vegetation performance up to 10 lbs/ft² (480 Pa) for a green alternative to rock riprap.

ERONET[™] PERMANENT EROSION CONTROL BLANKETS

The EroNet[™] Permanent ECB provides immediate erosion protection and vegetation establishment assistance until vegetation roots and stems mature.

EroNet[™] P300[®] Permanent Erosion Control Blankets

The P300° permanent erosion control blanket consists of UV-stabilized polypropylene fiber stitched between heavyweight UV-stabilized polypropylene top and bottom nets. These mats reduce soil loss and protect vegetation from being washed away or uprooted, even under high stress. Unvegetated, they reduce soil loss to less than 0.5 in. (12.7 mm) under shear stress up to 3.0 lbs/ft² (144 Pa), and protect vegetation from being washed away or uprooted when exposed to shear stresses up to 8 lbs/ft² (383 Pa).



To boost performance of the VMax turf reinforcement mats in critical applications, combine with our ShoreMax[®] flexible transition mat to create a system that can dramatically elevate the permissible shear stress and velocity protection beyond many hard armor solutions.



VMax Mats are perfect for pipe outlets, channel bottoms, shoreline transition zones, and other areas subjected to highly turbulent water flows.



Design and Installation Tools

SHIFT, CONTROL, ENTER

Professional guidance on RECP selection, design and project planning is at your fingertips with Tensar's proprietary Erosion Control Materials Design Software (ECMDS®). This web-based program incorporates design methodologies from the Federal Highway Administration and United States Department of Agriculture to analyze your specific site conditions, and make quantified recommendations based on data from controlled laboratory and field research. ECMDS is a must-have if you face tough erosion and sediment control regulations. Best of all, it's free of charge, compliments of North American Green. To learn more and access the software directly, go to **www.ECMDS.com**.

INSTRUCTIONS INCLUDED

Proper anchoring patterns and rates must be used to achieve optimal results in RECP installation. View our installation guides for stapling patterns. Site specific staple pattern recommendations based on soil type and severity of application may be acquired through our ECMDS.



HOLD ON TIGHT

When under the pressure of severe conditions, even the best erosion control products can't function to their full potential without proper installation and anchoring. North American Green supplies a wide variety of fastener options for nearly every application and soil type.

For use in cohesive soils, wire staples are a cost-effective means to fasten RECPs. Available in 6 in., 8 in., 10 in. and 12 in. lengths, our U-shaped staples can reach to various depths to ensure adequate pull-out resistance. For installation using our handy Pin Pounder installation tool, 6 in. V-top staples or 6 in. circle top pins are available.

Our biodegradable BioStakes[®] are available in 4 in. and 6 in. lengths and provide an environmentally friendly alternative to metal staples. For an even more durable, deeper reaching yet all-natural anchoring option, our wood EcoStakes[®] are available in 6 in., 12 in., 18 in. and 24 in. lengths.

For severe applications needing the ultimate, long-lasting hold, try our 12 and 18 in. rebar staples, our 12 in. plastic ShoreMax[®] stakes, or our complete line of percussion earth anchors. The Tensar earth anchors reach deep into the soil strata to offer enhanced anchoring in the worst conditions. Our variety of earth anchors are designed for durability and holding power under extreme hydraulic stresses and adverse soil conditions (*Table 1*).

For more information on the RollMax Systems or other systems within the North American Green Erosion Control Solutions, call **800-772-2040** or visit **nagreen.com**.

		Earth Anchor Options						
					EA	400	EA	680
	Tendon Type (¾32 in. x 36 in.)	Assembly Description	Fast Install	Economic Anchor	Stainless	Galvanized	Stainless	Galvanized
Options	Copper Stop Sleeve with Stainless Steel Washer	Manually crimped to the stainless steel cable to secure the face plate.		x	х		x	
		Three-dimensional, self-securing metal end piece that does not require manual crimping for tendon tensioning.	х	х	х	х	х	x
End Piece	Wedge Grip Piece	х		х	x	х	х	
	Aluminum Stop Sleeve with Stainless Steel Washer	Manually crimped to the galvanized cable to secure the face plate.		x		x		х

TABLE 1

The complete line of RollMax[®] products offers a variety of options for both short-term and permanent erosion control needs. Reference the RollMax Products Chart below to find the right solution for your next project.



×

RollMax Product Selection Chart


TEMPORARY									
	Product Description	Longevity	Applications	Design Permissible Shear Stress Ibs/ft² (Pa)	Design Permissibl Velocity ft/s (m/s				
ERONET									
D575	1.5 lb., accelerated photodegradable, polypropylene top net, 100% straw fiber matrix	45 days	Low Flow Channels 4:1 - 3:1 Slopes	Unvegetated 1.55 (74)	Unvegetated 5.0 (1.52)				
D5150	1.5 lb., photodegradable, polypropylene top & bottom net, 100% straw fiber matrix	60 days	Moderate Flow Channels 3:1 - 2:1 Slopes	Unvegetated 1.75 (84)	Unvegetated 6.0 (1.83)				
575	1.5 lb., photodegradable, polypropylene top net, 100% straw fiber matrix	12 months	Low Flow Channels 4:1 - 3:1 Slopes	Unvegetated 1.55 (74)	Unvegetated 5.0 (1.52)				
5150	1.5 lb., photodegradable, polypropylene top & bottom net, 100% straw fiber matrix	12 months	Moderate Flow Channels 3:1 - 2:1 Slopes	Unvegetated 1.75 (84)	Unvegetated 6.0 (1.83)				
SC150	2.9 lb., UV-stable polypropylene top net, 70% straw/30% coconut fiber matrix, 1.5 lb., photodegradable polypropylene bottom net	24 months	Medium Flow Channels 2:1 - 1:1 Slopes	Unvegetated 2.0 (96)	Unvegetated 8.0 (2.44)				
C125	2.9 lb., UV stable polypropylene top & bottom nets, 100% coconut fiber matrix	36 months	High Flow Channels 1:1 and Greater Slopes	Unvegetated 2.25 (108)	Unvegetated 10.0 (3.05				
BIONET									
S75BN	9.3 lb., leno woven biodegradable jute top net, 100% straw fiber matrix	12 months	Low Flow Channels 4:1 - 3:1 Slopes	Unvegetated 1.60 (76)	Unvegetated 5.0 (1.52)				
5150BN	9.3 lb., leno woven biodegradable jute top net, 100% straw fiber matrix, 7.7 lb., woven biodegradable jute bottom net	12 months	Moderate Flow Channels 3:1 - 2:1 Slopes	Unvegetated 1.85 (88)	Unvegetated 6.0 (1.83)				
	9.3 lb., leno woven biodegradable jute top net, 70% straw/30% coconut fiber matrix, 7.7 lb., woven biodegradable jute bottom net	18 months	Medium Flow Channels 2:1 - 1:1 Slopes	Unvegetated 2.10 (100)	Unvegetated 8.0 (2.44)				

10



TEMPORARY										
	Product Description	Longevity	Applications	Design Permissible Shear Stress Ibs/ft² (Pa)	Design Permissible Velocity ft/s (m/s)					
BIONET CONT'D										
C125BN	9.3 lb., leno woven biodegradable jute top net, 100% coconut fiber matrix, 7.7 lb., woven biodegradable jute bottom net	24 mo.	High Flow Channels 1:1 and Greater Slopes	Unvegetated 2.35 (112)	Unvegetated 10.0 (3.05)					
C700BN	143 lb., (700 g) woven biodegradable coir top net, 100% coconut fiber matrix, 7.7 lb., woven biodegrdable jute bottom net	36 mo.	High Flow Channels 1:1 and Greater Slopes	Unvegetated 2.35 (112)	Unvegetated 10.0 (3.05)					
		PERM	ANENT							
ERONET										
P300	5.0 lb., UV-stable polypropylene top net, 100% polypropylene fiber matrix, 3.0 lb., UV-stable polypropylene bottom net	Permanent	High Flow Channels 1:1 Slopes	Unvegetated 3.0 (144) Vegetated 8.0 (383)	Unvegetated 9.0 (2.7) Vegetated 16.0 (4.9)					
VMAX										
	5.0 lb., UV-stable polypropylene top & bottom nets, 24.0 lb., UV-stable polypropylene corrugated center net, 70% straw/30% coconut fiber matrix	Permanent	High Flow Channels 1:1 and Greater Slopes	Unvegetated 3.0 (144) Vegetated 10.0 (480)	Unvegetated 9.5 (2.9) Vegetated 15.0 (4.6)					
SC250	8.0 lb., UV-stable polypropylene top & bottom nets, 24.0 lb., UV-stable polypropylene corrugated center net, 100% coconut fiber matrix	Permanent	High Flow Channels 1:1 and Greater Slopes	Unvegetated 3.2 (153) Vegetated 12.0 (576)	Unvegetated 10.5 (3.2) Vegetated 20.0 (6.0)					
P550	24.0 lb., UV-stable polypropylene top & bottom nets, 24.0 lb., UV-stable polypropylene corrugated center net, 100% polypropylene fiber matrix	Permanent	Extreme High Flow Channels 1:1 and Greater Slopes	Unvegetated 4.0 (191) Vegetated 14.0 (672)	Unvegetated 12.5 (3.8) Vegetated 25.0 (7.6)					
TMax	100% UV-stable polypropylene monofilament yarns, woven into a 3-D structure	Permanent	Extreme High Flow Channels 1:1 and Greater Slopes	Vegetated 15.0 (718)	Vegetated 25.0 (7.6)					
	100% UV-stable polypropylene monofilament yarns, woven into a 3-D structure	Permanent	Extreme High Flow Channels 1:1 and Greater Slopes	Vegetated 16.0 (766)	Vegetated 25.0 (7.6)					

Channel Installation Detail

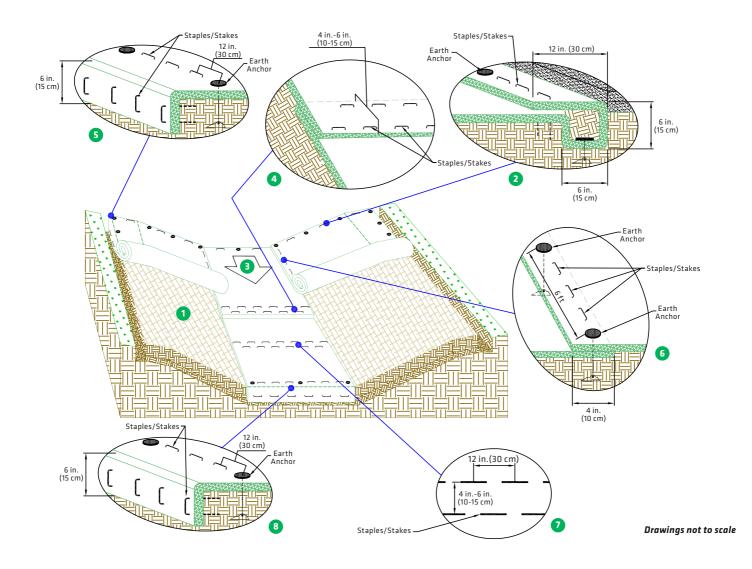


GENERAL INSTALLATION

- Prepare soil before installing the HPTRM, including any necessary application of soil amendments such as lime or fertilizer. See seeding and vegetating section for details regarding preseeding, overseeding or use with sod.
- 2. Begin at the top of the channel by anchoring the HPTRM in a 6 in. (15 cm) deep x 6 in. (15 cm) wide trench with approximately 12 in. (30 cm) of HPTRM extended beyond the upslope portion of the trench. Anchor the HPTRM with a row of anchors/staples/ stakes spaced approximately 12 in. (30 cm) apart in the bottom of the trench. Backfill and compact the trench after stapling. Compact soil and fold remaining 12 in.(30 cm) portion of HPTRM back over compacted soil. Secure HPTRM over soil with a row of anchors/staples/stakes spaced approximately 12 in. (30 cm) across the width of the HPTRM.
- Roll center HPTRM in direction of water flow in bottom of channel. HPTRMs will unroll with appropriate side against the soil surface. All HPTRMs must be securely fastened to soil surface by placing anchors/staples/stakes in appropriate locations as shown in the anchoring detail.

- Place consecutive HPTRMs end over end (shingle style) with a 4 in. x 6 in. (10 cm-15 cm) overlap. Use a double row of staples/ stakes staggered 12 in. (30 cm) apart and 12 in. (30 cm) on center to secure HPTRMs.
- Full length edge of HPTRMs at top of side slopes must be anchored with a row of staples/stakes approximately 12 in. (30 cm) apart in a 6 in. (15 cm) deep x 6 in. (15 cm) wide trench. Backfill and compact the trench after stapling.
- **6.** Adjacent HPTRMs must be overlapped approximately 4 in. (10 cm) and fastened.
- In high flow channel applications, a staple/stake check slot is recommended at 30 ft to 40 ft (9 m-12 m) intervals. Use a double row of staples/stakes staggered 4 in. (10 cm) apart and 12 in. (30 cm) on center over entire width of the channel.
- The terminal end of the HPTRMs must be anchored with a row of staples/stakes approximately 12 in. (30 cm) apart in a 6 in. (15 cm) deep x 6 in. (15 cm) wide trench. Backfill and compact the trench after stapling.

Anchoring Detail

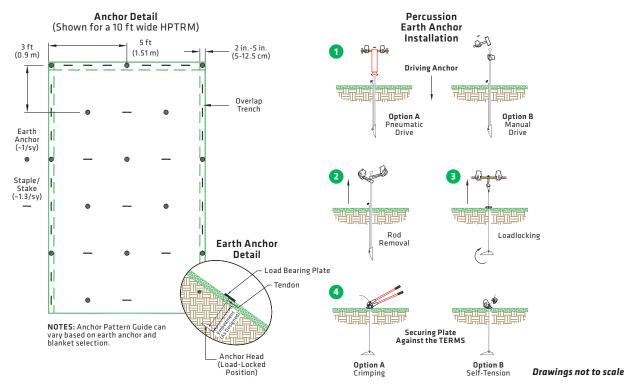

ANCHORING DETAIL

The performance of ground anchoring devices is highly dependent on numerous site/project specific variables. It is the sole responsibility of the project engineer and/or contractor to select the appropriate anchor type and length. Anchoring shall be selected to hold the mat in intimate contact with the soil subgrade and resist pullout in accordance with the project's design intent.

- Staples and/or stakes should be at least 6 in. (15 cm) in length and with sufficient ground penetration to resist pullout. Longer staples and/or stakes may be needed in looser soils.
- The percussion earth anchor assembly consists of an anchor head, a tendon, a faceplate, and an end-piece device. See North American Green[®] Earth Anchor specification for detailed information on assembly components and associated pull-out strength.

PERCUSSION EARTH ANCHOR INSTALLATION

- Insert the drive rod into the assembly's anchor head then use either a sledge hammer or vibratory hammer to drive the anchor to their desired depth.
- 2. After the desired anchor depth is achieved, retract the drive rod.
- Lock the anchor assembly by swiftly pulling the cable upwards until the anchor head rotates as signaled by sudden resistance to pulling. A hooked setting tool may be used to aid in this step.

NOTE: Larger anchors may require more force to set the anchor. This can be achieved through using simple mechanical equipment for greater leverage, such as a fulcrum, manual or hydraulic jack, winch, or post puller.

 Secure the faceplate to the High-performance Turf Reinforcement Mat (HPTRM) surface by locking the end-piece. If using a copper or aluminum stop, crimp the ferrule to secure. If using a self-tensioning end-piece (grip or wedge grip) set by simply tightening the end-piece against the faceplate. If desired, cut the remaining cable assembly, above end-piece, to desired length.


SEEDING AND VEGETATING


When using a Composite Turf Reinforcement Mat (C-TRM) with fiber components:


- Pre-seed prepared soils prior to the installation of the C-TRM. Install matting as directed. C-TRM does not require soil infill or a top dressing of seed. Overseeding may be done as a secondary form of seeding.
- Sod may be installed in place of seeding on top of the C-TRM. Additional staking of sod is recommended in high-flow conditions. Sodded areas should be irrigated until rooting through the mat and into subgrade occurs.

When using a woven HPTRM:


- 1. Install the HPTRM as directed prior to seed and soil filling.
- Place seed into the installed HPTRM. After seeding, spread a layer of fine soil into the mat. Using the flat side of a rake, broom or other tool, completely fill the voids. Smooth soil-fill in order to just expose the top of the HPTRM matrix. Do not place excessive soil above the mat.
- Additional seed, hydraulic mulching of the use of a temporary Erosion Control Blanket (ECB) can be applied over the soil-filled mat for increased protection.
- 4. Sod may be installed in place of seeding. Install HPTRM, and soil-fill as outlined above. Place sod directly onto the soil-filled HPTRM. Additional staking of sod is recommended in high-flow conditions. Sodded areas should be irrigated until rooting through the mat and into subgrade occurs.
- Consult with a manufacturer's technical representative for installation assistance if unique conditions apply.

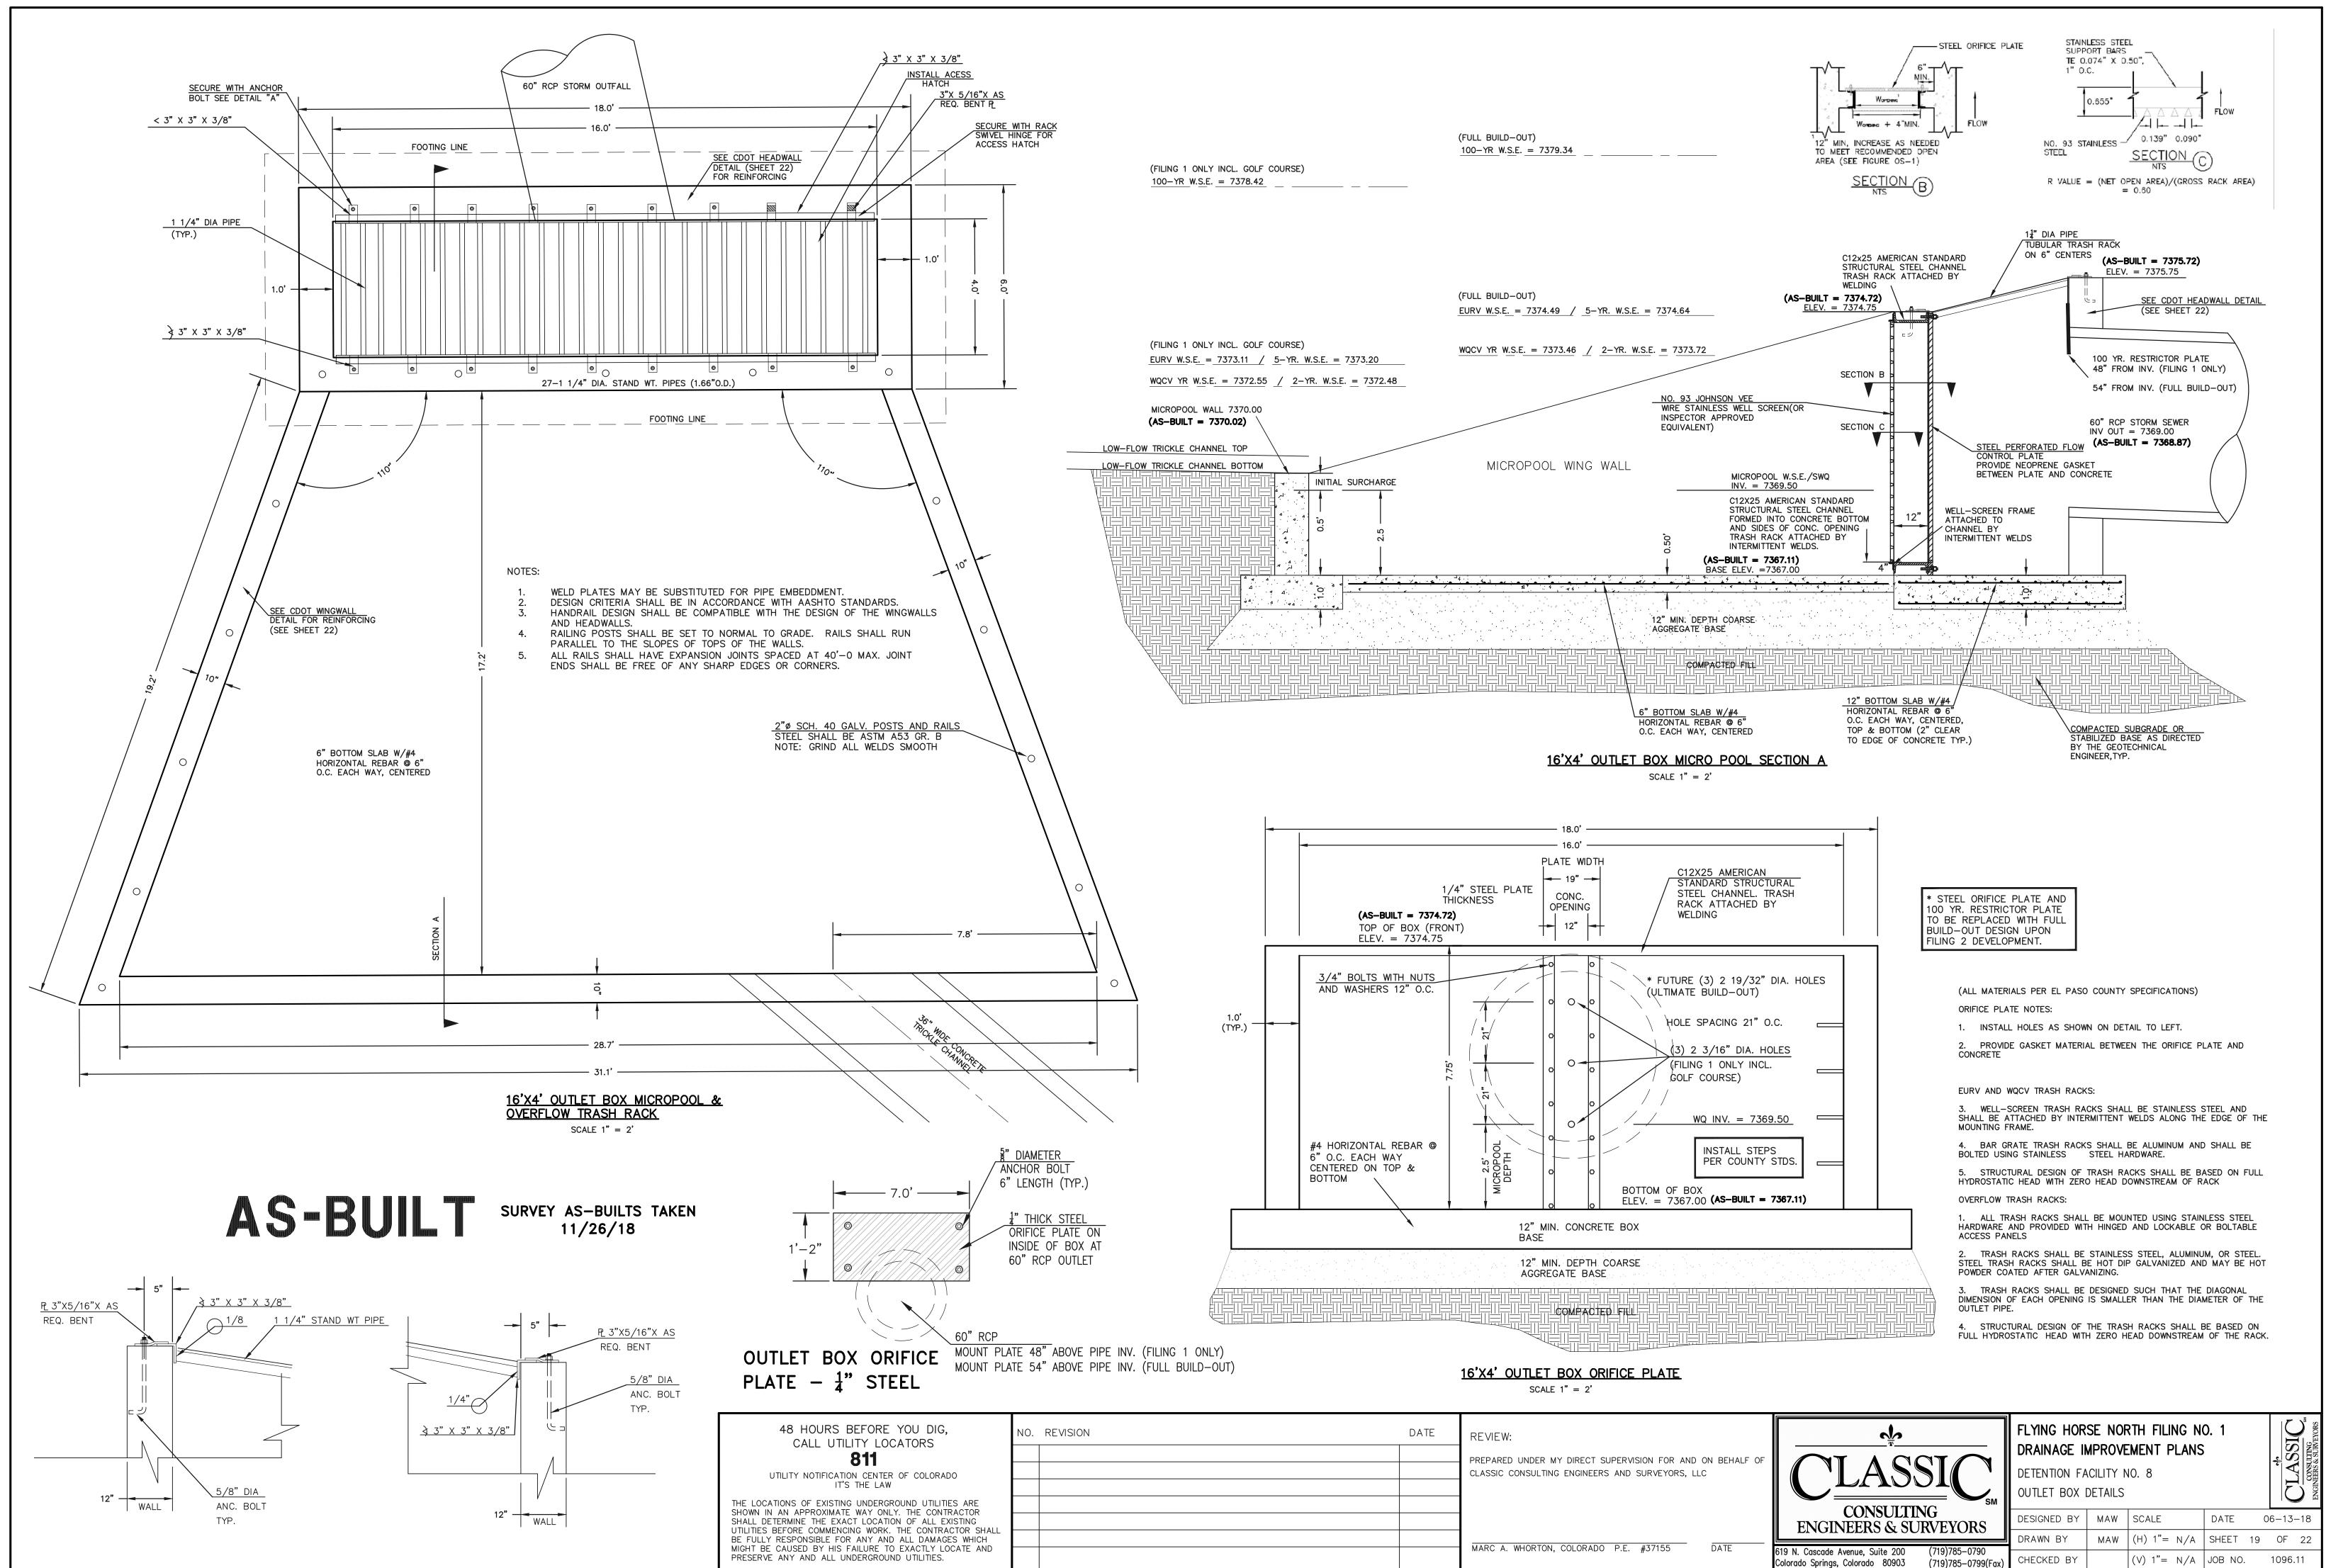

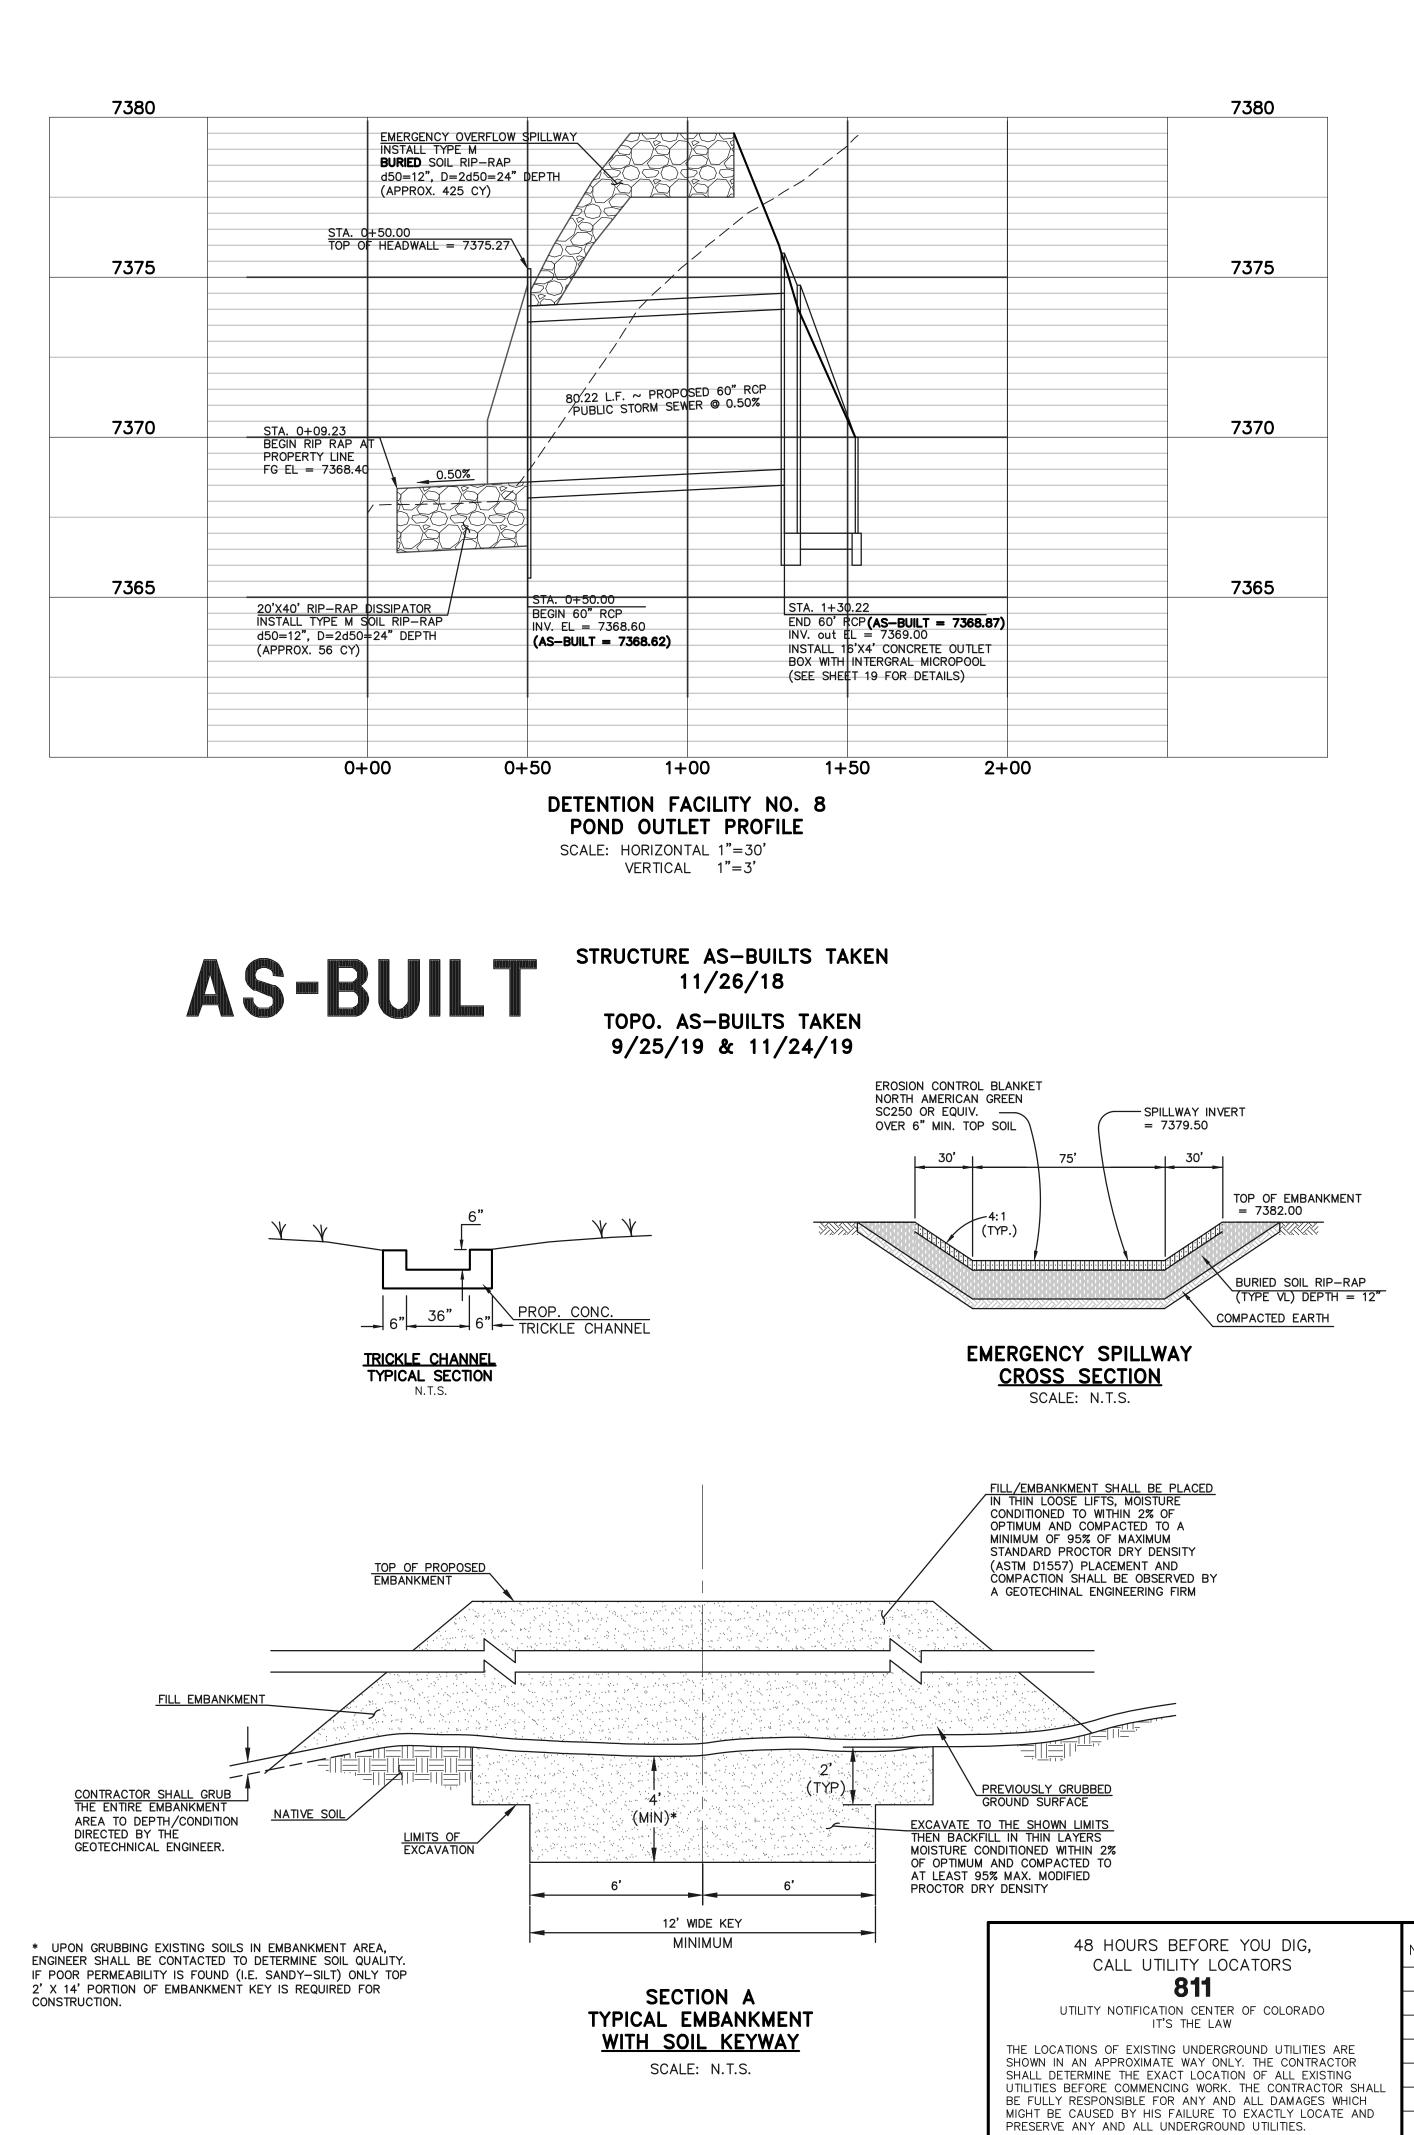

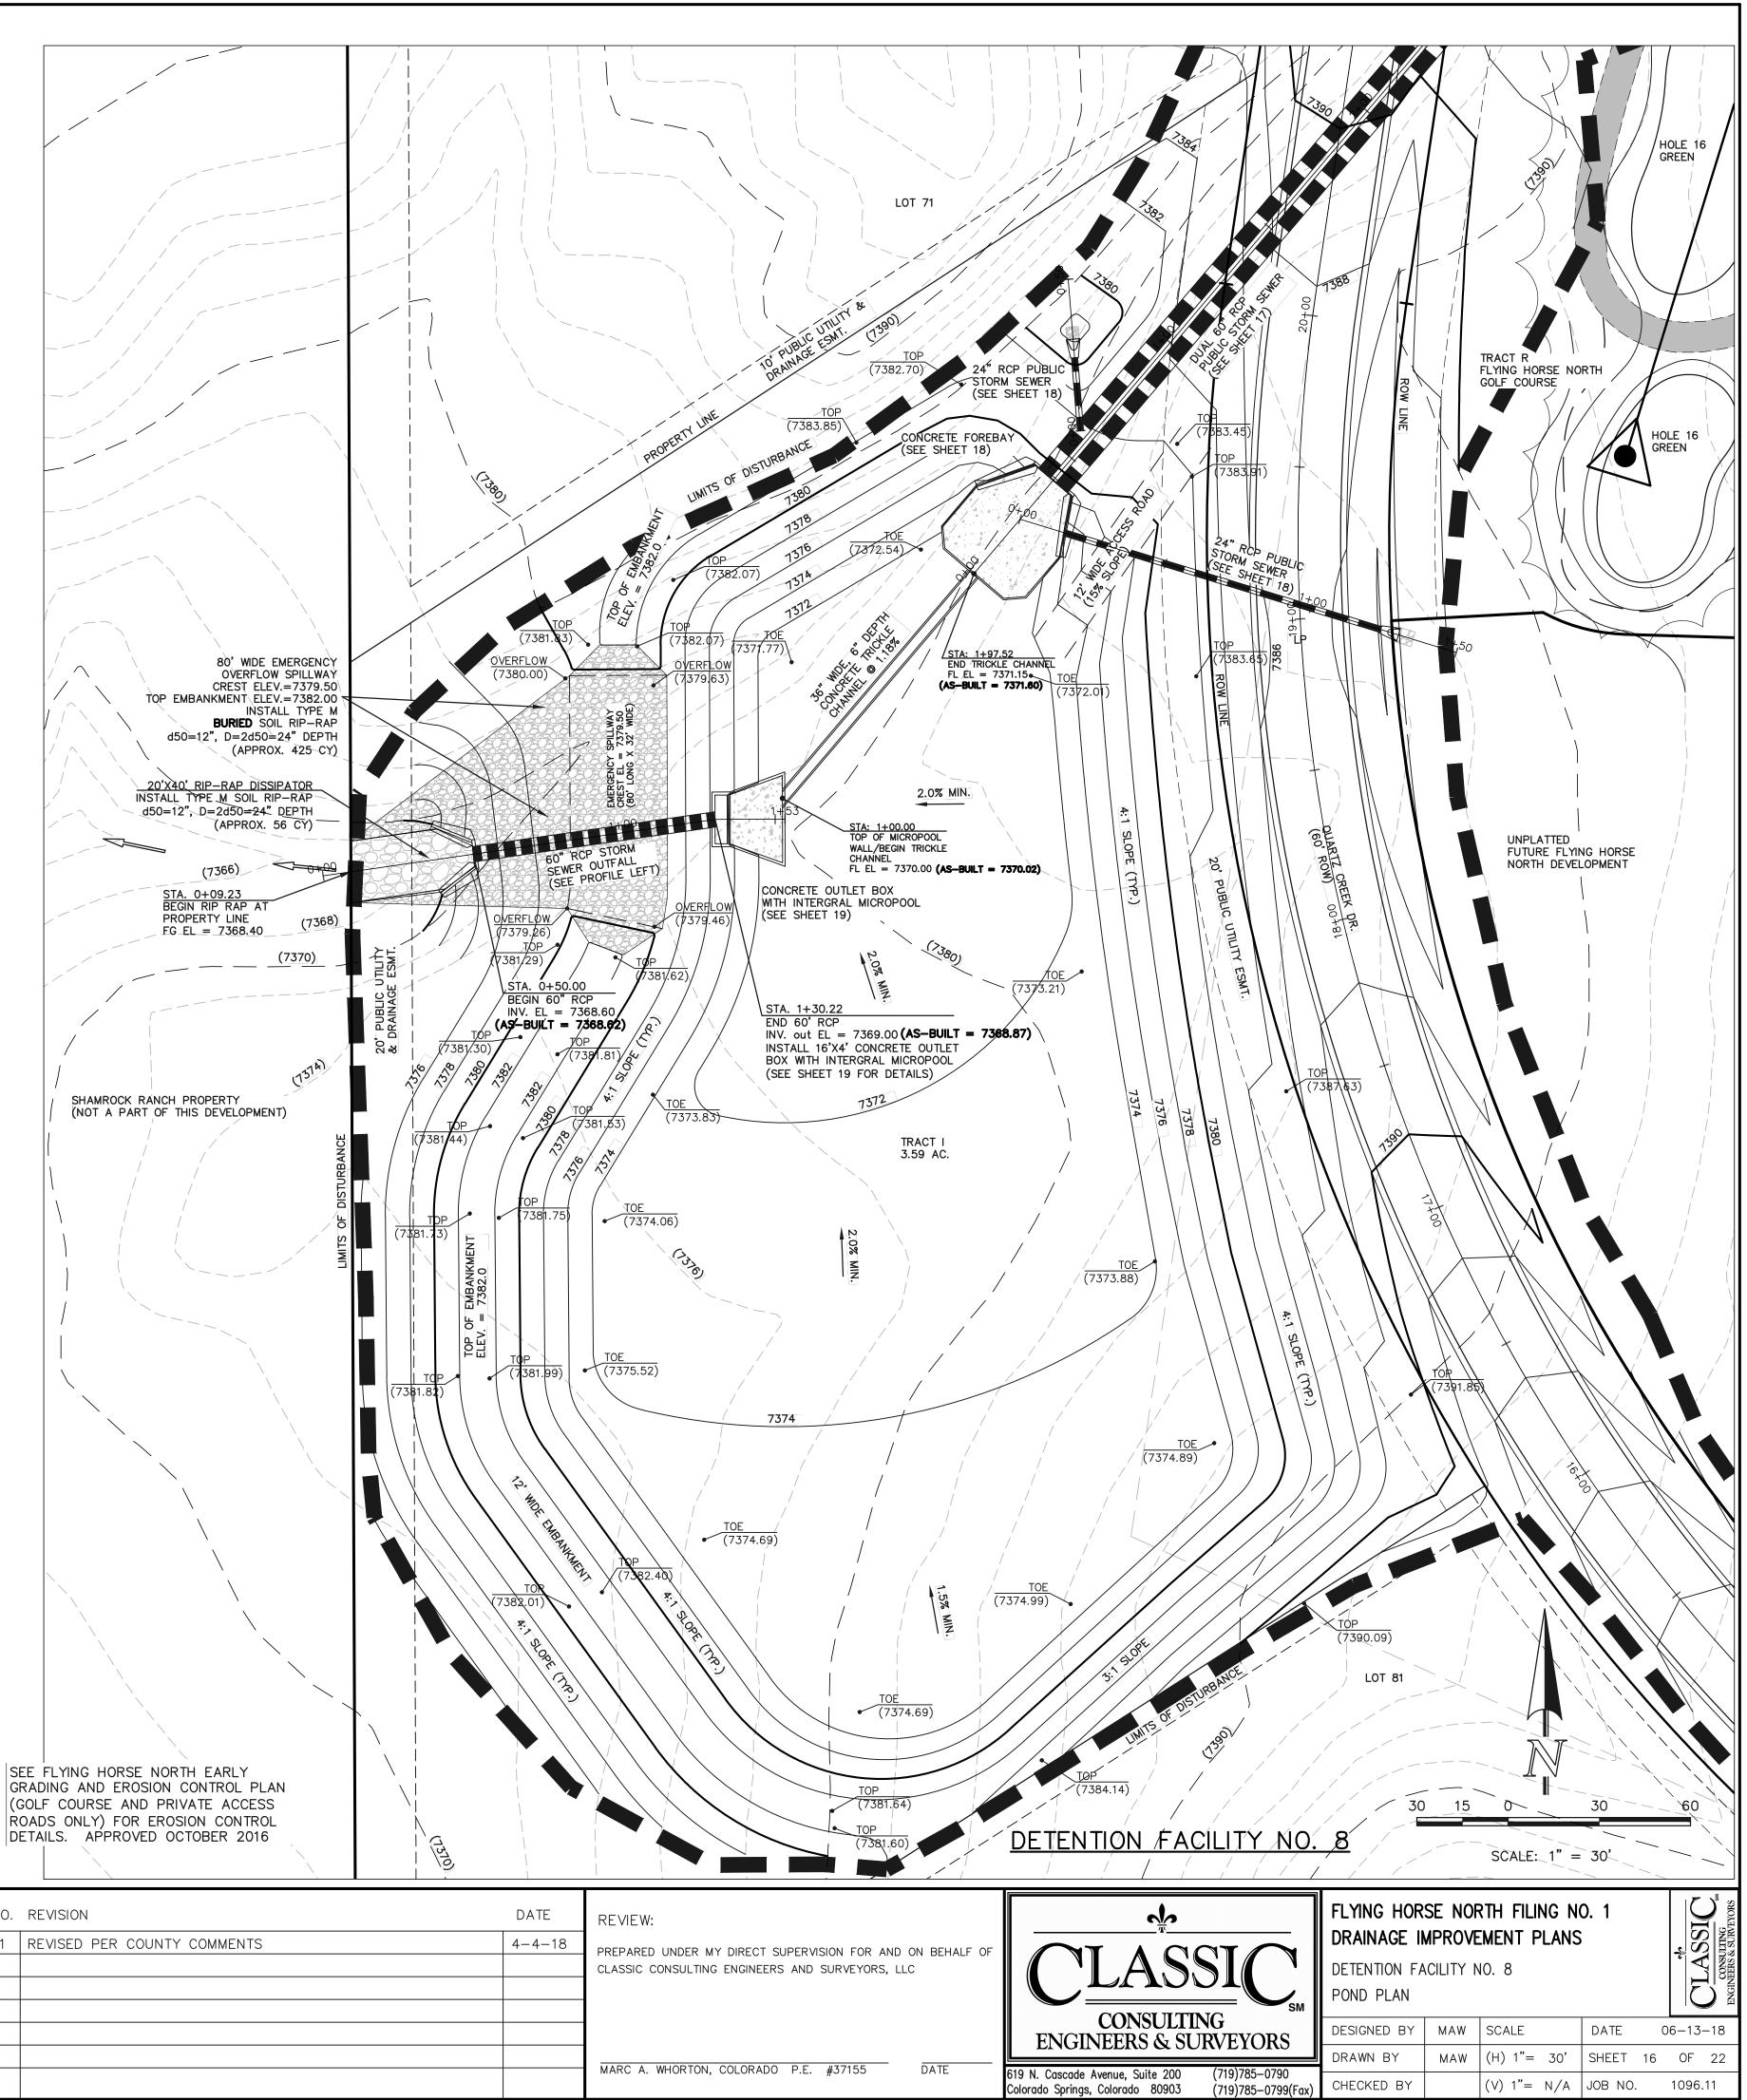

	NO.	REVISION	DATE	REVIEW:
	1	REVISED PER COUNTY COMMENTS	4-4-18	PREPARED UNDER MY DIRECT S CLASSIC CONSULTING ENGINEER
IALL				
H ND				MARC A. WHORTON, COLORADC

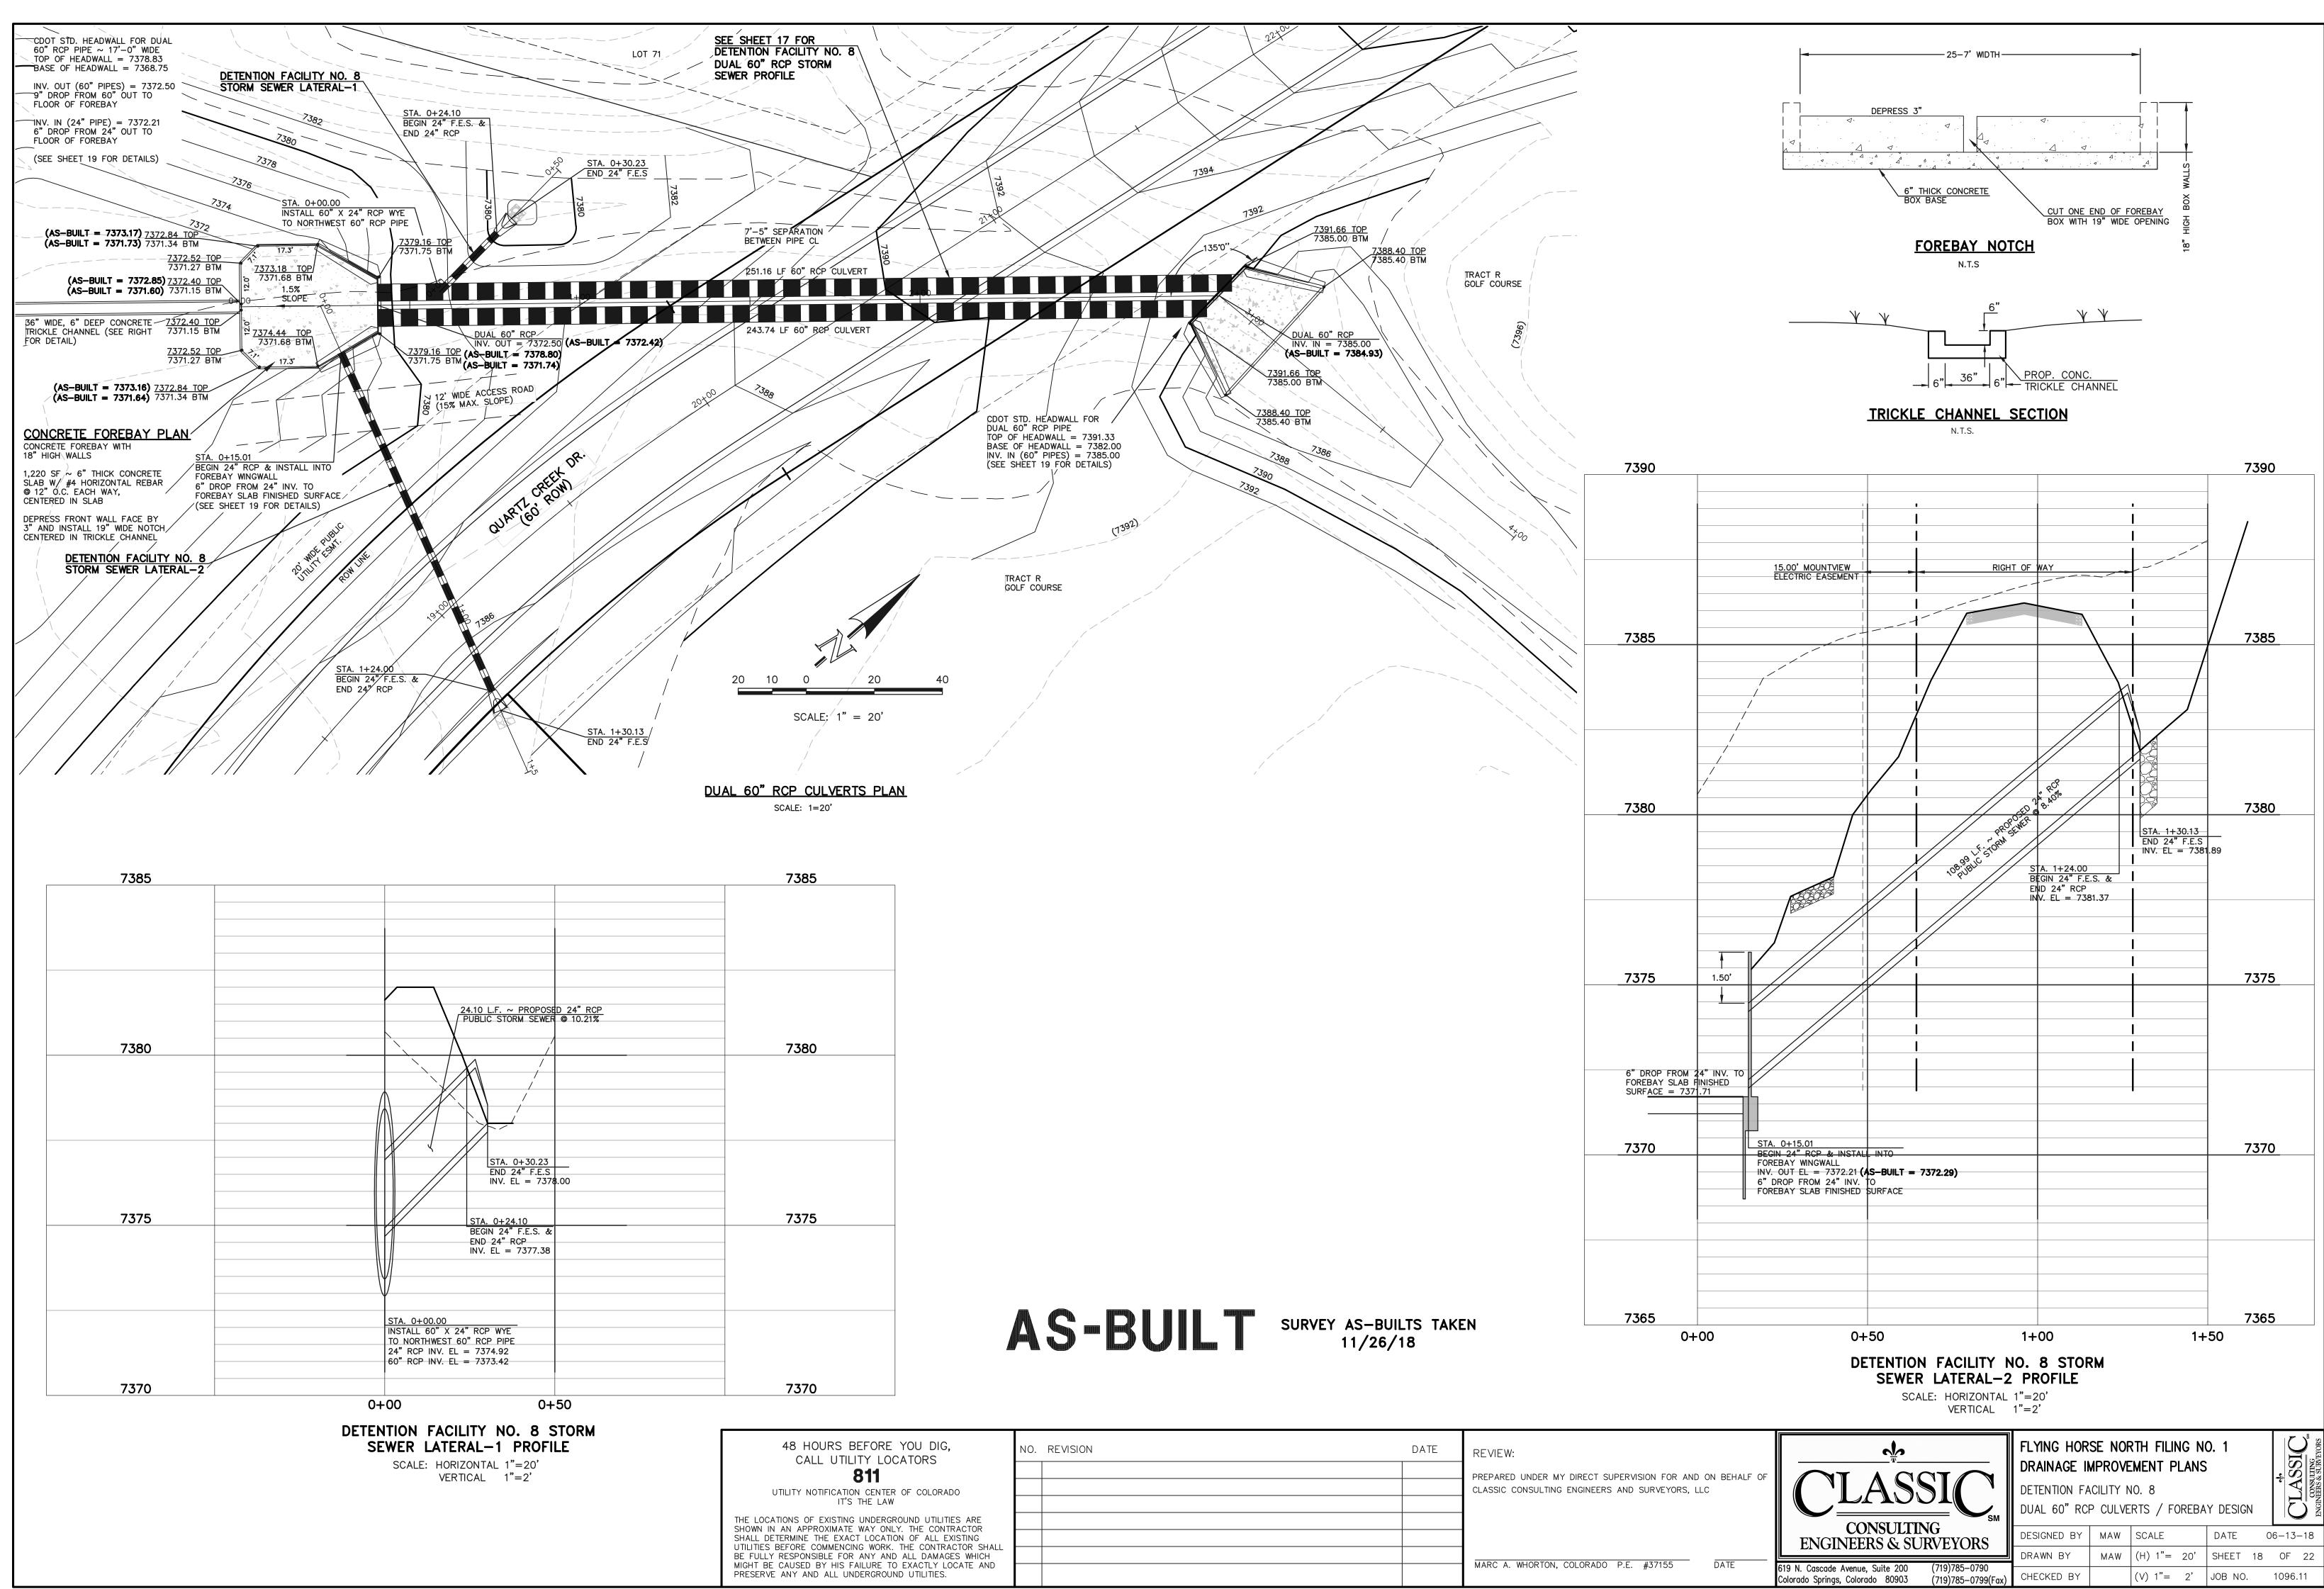

	/ \(\(\) / \(\)	1110/01					0014	110/10	101
DE	TERMINE	E THE	EXACT	LOCA	TION	OF A	ALL E	EXIST	ING
ES E	BEFORE	COMM	IENCIN(G WOR	K. TH	HE CO	NTR	ACTC	R
_LY	RESPO	NSIBLE	FOR	ANY A	ND A	LL D	AMA	GES	WHI
ΒE	CAUSE	DBYI	HIS FA	ILURE	TO E	XACT	ĽΥĽ	OCA	ΓE .
	ANV A			FDCDC		I I TH I	TIEC		



Flying Horse North Filing No. 3 Final Drainage Report Project No.: 211030.20


El Paso County, Colorado


APPENDIX F

DRAINAGE MAPS

Basin	Design Point	5 Year Pre Devlopment	100 Year Pre Development
А	А	20.84	43.83
В	В	103.48	221.28
С	С	33.36	71.27
D	D	31.56	67.84
E	E	223.69	483.10
F	F	24.27	51.63
G	G	79.17	166.51
Н	Н	18.59	39.78
Ι	I	34.58	72.63
J	J	56.31	120.46
К	К	92.05	195.43
L	L	107.58	228.73
Μ	М	11.48	24.61
N	Ν	68.16	143.11
0	0	22.69	48.54
Р	Р	38.52	82.17
Q	Q	64.68	137.80
R	R	108.65	232.13
S	S	25.99	54.65
Т	Т	4.04	8.68
	T1	137.90	294.73
	T2	145.46	311.00
U	U	4.15	8.95
V	V	29.63	63.92
W	W	3.45	7.33
Х	Х	167.76	361.56

	Design	5 Year Pre	100 Year Pre
Basin	Point	Devlopment	Development
	IRR_Pond	298.49	644.35
	SP1	207.17	515.49
	SP2	281.79	653.32
	SP3	320.31	725.59
AA	AA	38.76	80.22
BB	BB	40.62	84.15
	BB1	242.15	503.29
	BB2	257.03	534.86
	BB3	346.26	733.92
CC	СС	6.53	13.57
DD	DD	58.42	123.69
EE	EE	81.16	167.45
FF	FF	162.77	340.42
GG	GG	14.93	31.99
НН	НН	13.01	27.42
Π	I	81.77	175.60
11	JJ	9.74	20.50
КК	КК	7.51	15.99
LL	LL	6.88	14.48
	LL1	24.12	50.88
	OF1	320.31	725.59
	OF2	145.46	311.00
	OF3	167.76	361.56
	OF4	346.26	733.92
	OF5	24.12	50.88

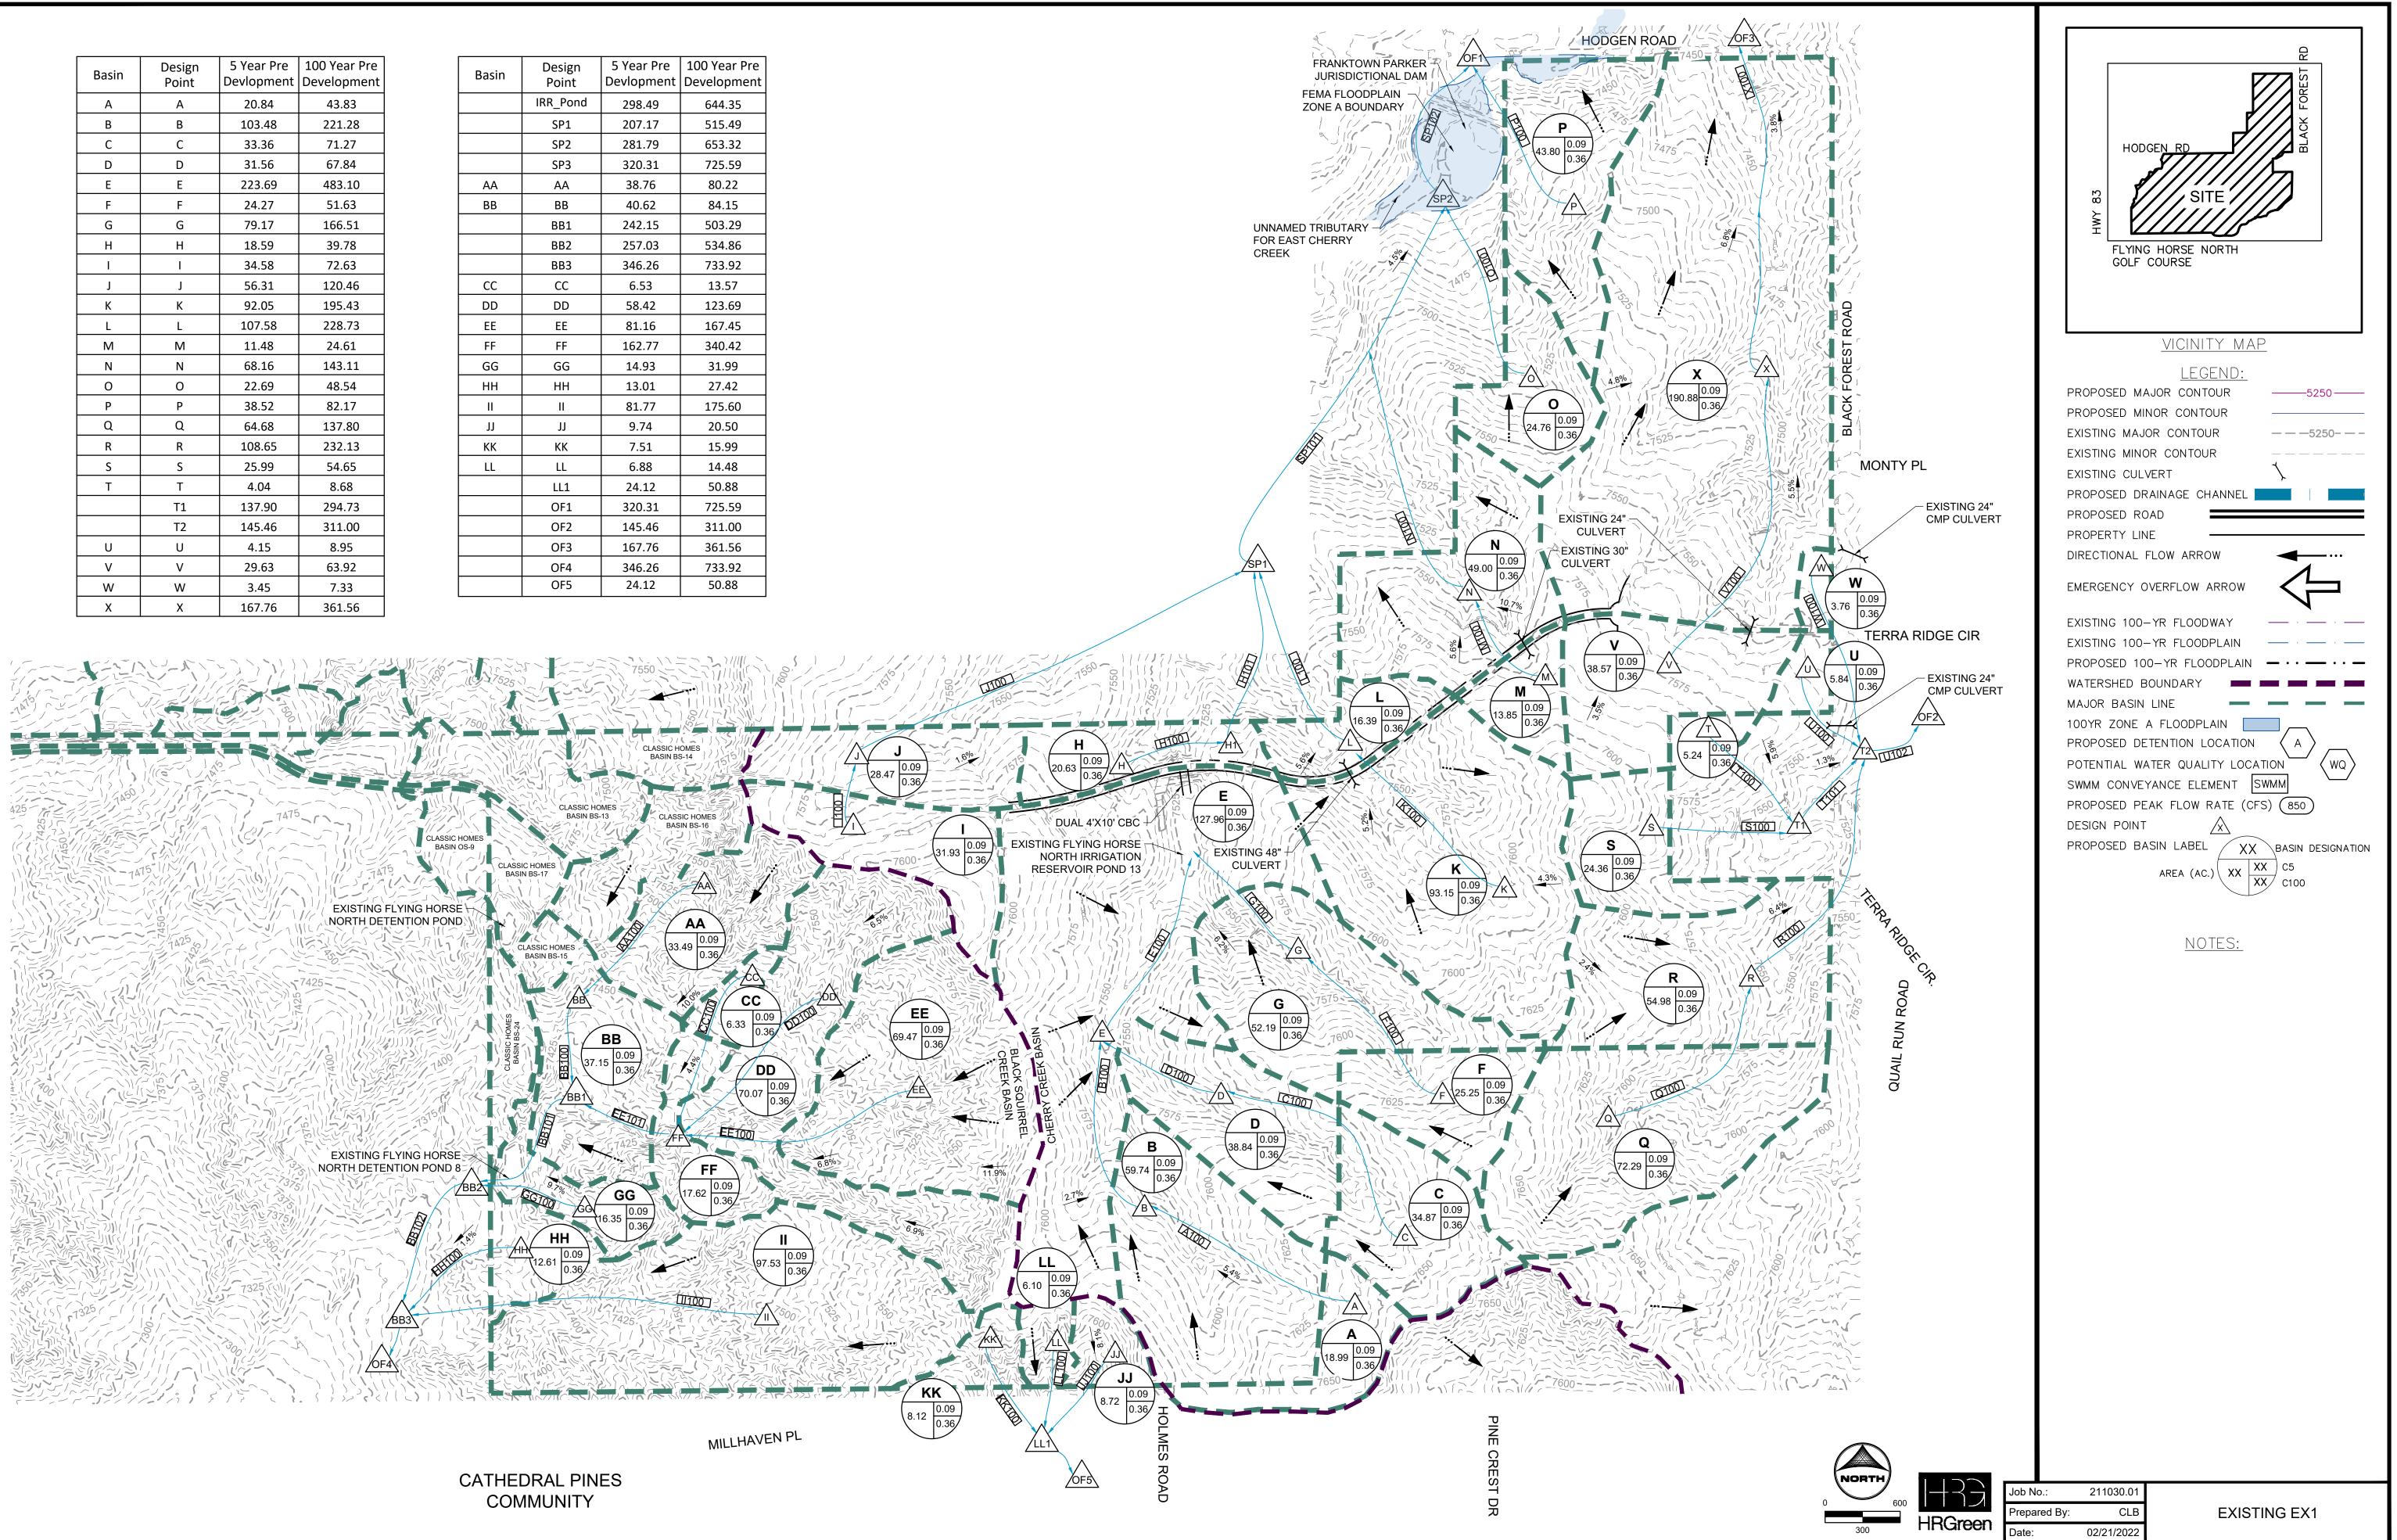

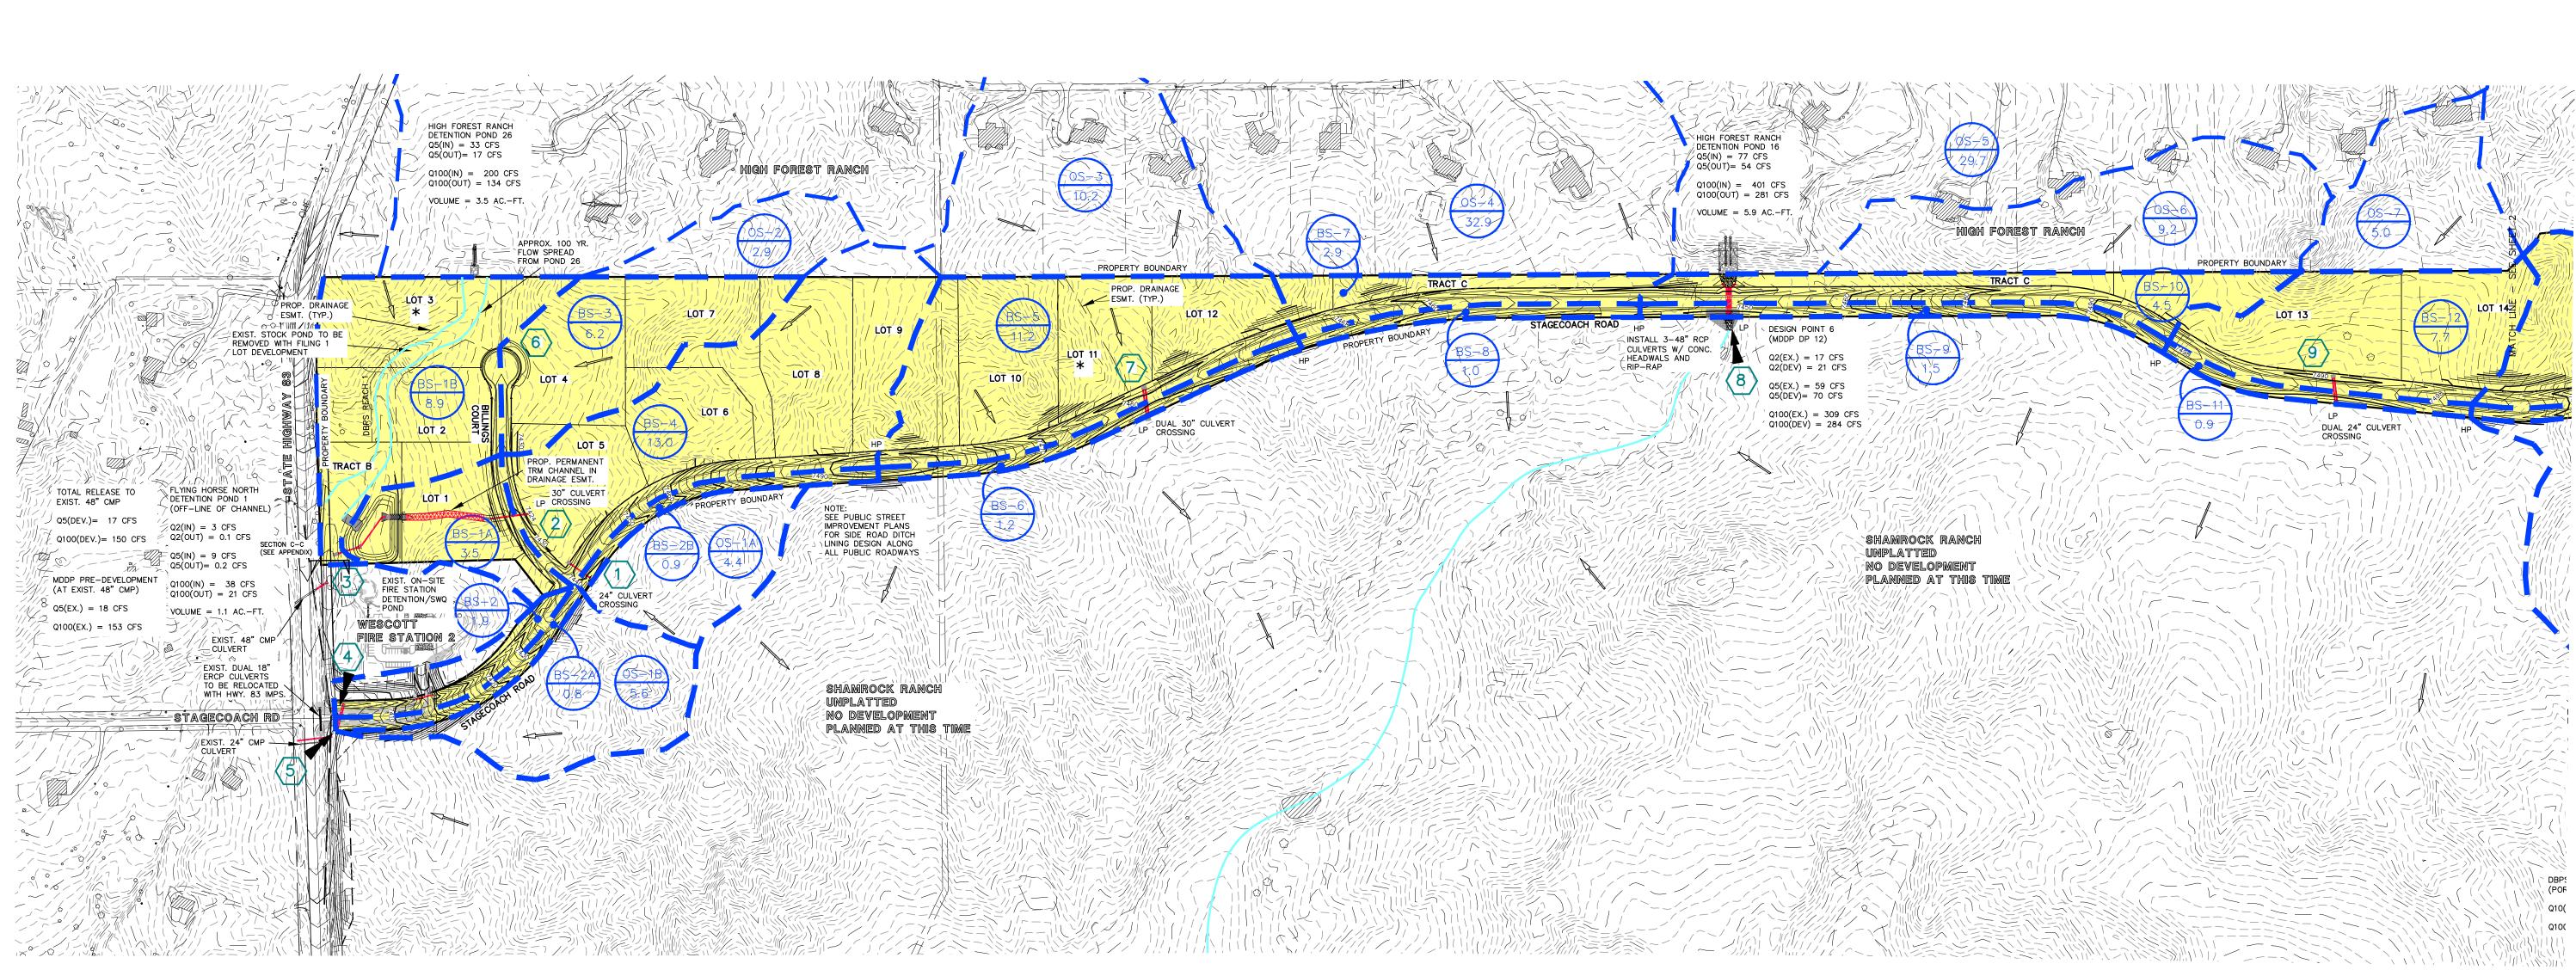


BASIN SUMMARY - DEVELOPED CONDITIONS


		COMPOSITE	TOTAL	Q	Q	Q
BASIN	AREA	CN	LAG TIME	2 Yr.	5 Yr.	100 Yr.
(label)	(acres)		(hours)	(cfs)	(cfs)	(cfs)
OS-1A	4.40	61.0	0.20	0.4	1.6	7.7
OS-1B	5.60	61.0	0.21	0.5	1.9	9.4
EX-DP-3 (Pre-Dev.)	36.00	60.0	0.25	0.5	4.8	41.3
OS-2	2.90	61.0	0.20	0.1	0.6	4.0
OS-3	10.20	65.0	0.19	1.0	3.8	17.9
OS-4	32.90	65.0	0.23	2.8	11.2	53.6
OS-5	29.70	65.0	0.39	1.9	7.1	37.0
OS-6	9.20	65.0	0.21	0.9	3.2	15.5
OS-7	5.00	65.0	0.18	0.5	2.0	9.0
BS-1A	3.50	65.0	0.17	0.4	1.4	6.3
BS-1B	8.90	65.0	0.20	0.4	2.4	13.8
BS-2	1.90	89.0	0.35	2.9	4.2	8.4
BS-2A	0.80	89.0	0.13	1.2	1.8	3.5
BS-2B	0.90	89.0	0.12	1.4	2.0	4.0
BS-3	6.20	65.0	0.20	0.6	2.3	10.8
BS-4	13.00	67.0	0.23	1.9	5.5	23.6
BS-5	11.20	65.0	0.18	1.1	4.4	20.1
BS-6	1.20	89.0	0.09	1.9	2.8	5.4
BS-7	2.90	65.0	0.13	4.4	6.4	12.8
BS-8	1.00	89.0	0.12	1.6	2.2	4.5
BS-9	1.50	89.0	0.13	2.3	3.3	6.6
BS-10	4.50	65.0	0.24	6.0	8.7	17.5
BS-11	0.90	89.0	0.08	1.5	2.1	4.1
BS-12	7.70	65.0	0.19	0.8	3.0	13.8

DESIGN POINTS SURFACE ROUTING SUMMARY - DEVELOPED CONDITIONS

Design Point (label)	Contributing Basins	Q 2 Yr. Q (cfs)	Q 5 Yr. Q (cfs)	Q 100 Yr. Q (cfs)
DP-1 DEV	OS-1A, BS-2B	1.6	3.4	11
DP-2 DEV	DP-1, BS-4	3.2	8.8	35
TOTAL INFLOW TO POND 1 (UD Detention hydrograph)	DP-1, DP-2, BS-1A	4	7	38
DP-3 DEV (Pond Pack routing)	OS-2, BS-3, BS-1B, Release from FHN Pond 1	1	6	39
DP-4 DEV	BS-2	2.9	4.2	8
DP-5 DEV	OS-1B, BS-2A	1.5	3.5	13
DP-6 DEV	OS-2, BS-3	0.6	2.8	15
DP-7 DEV	OS-3, BS-5	2.1	8.2	38
DP-8 DEV	OS-4, OS-5, OS-6, BS-7, BS-10, Release from Exist. HFR Pond 16	20.9	70.4	284
DP-9 DEV	OS-7, BS-12	1.3	5.0	23

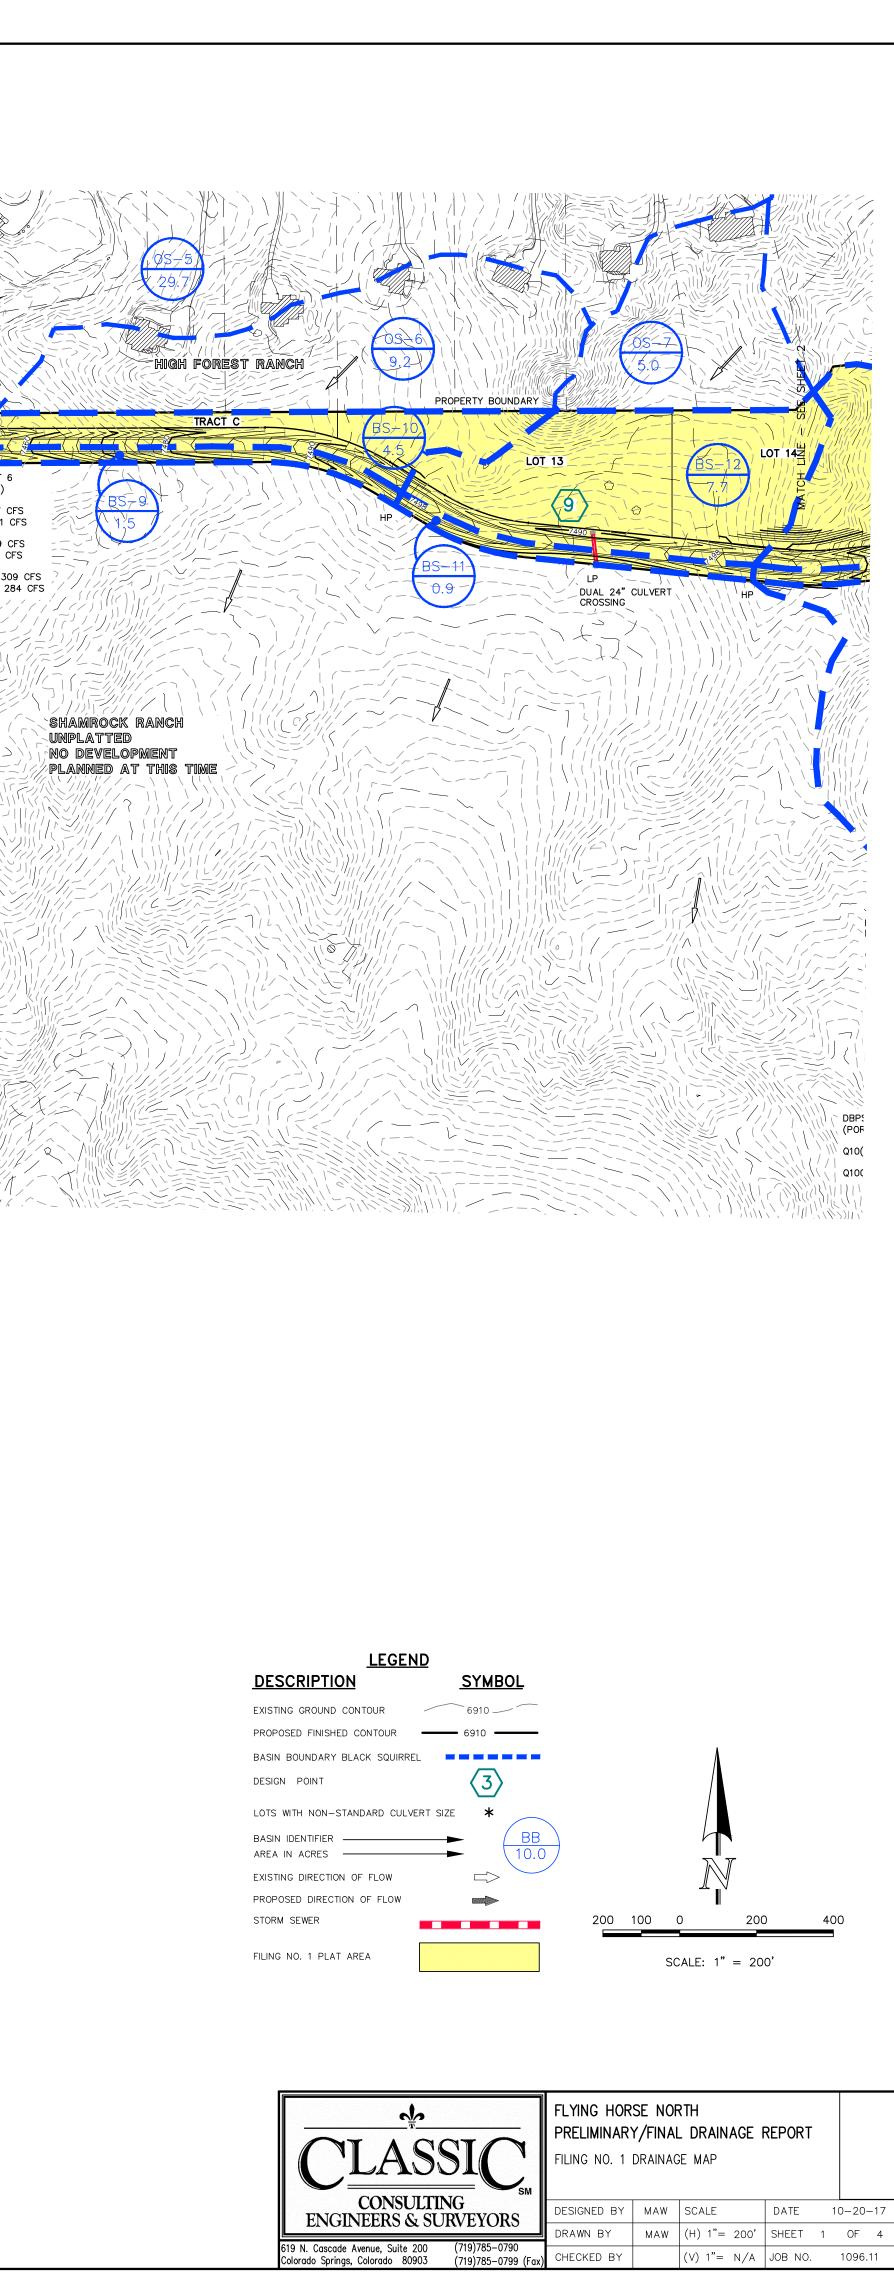

(V) 1"= N/A JOB NO. 1096.11

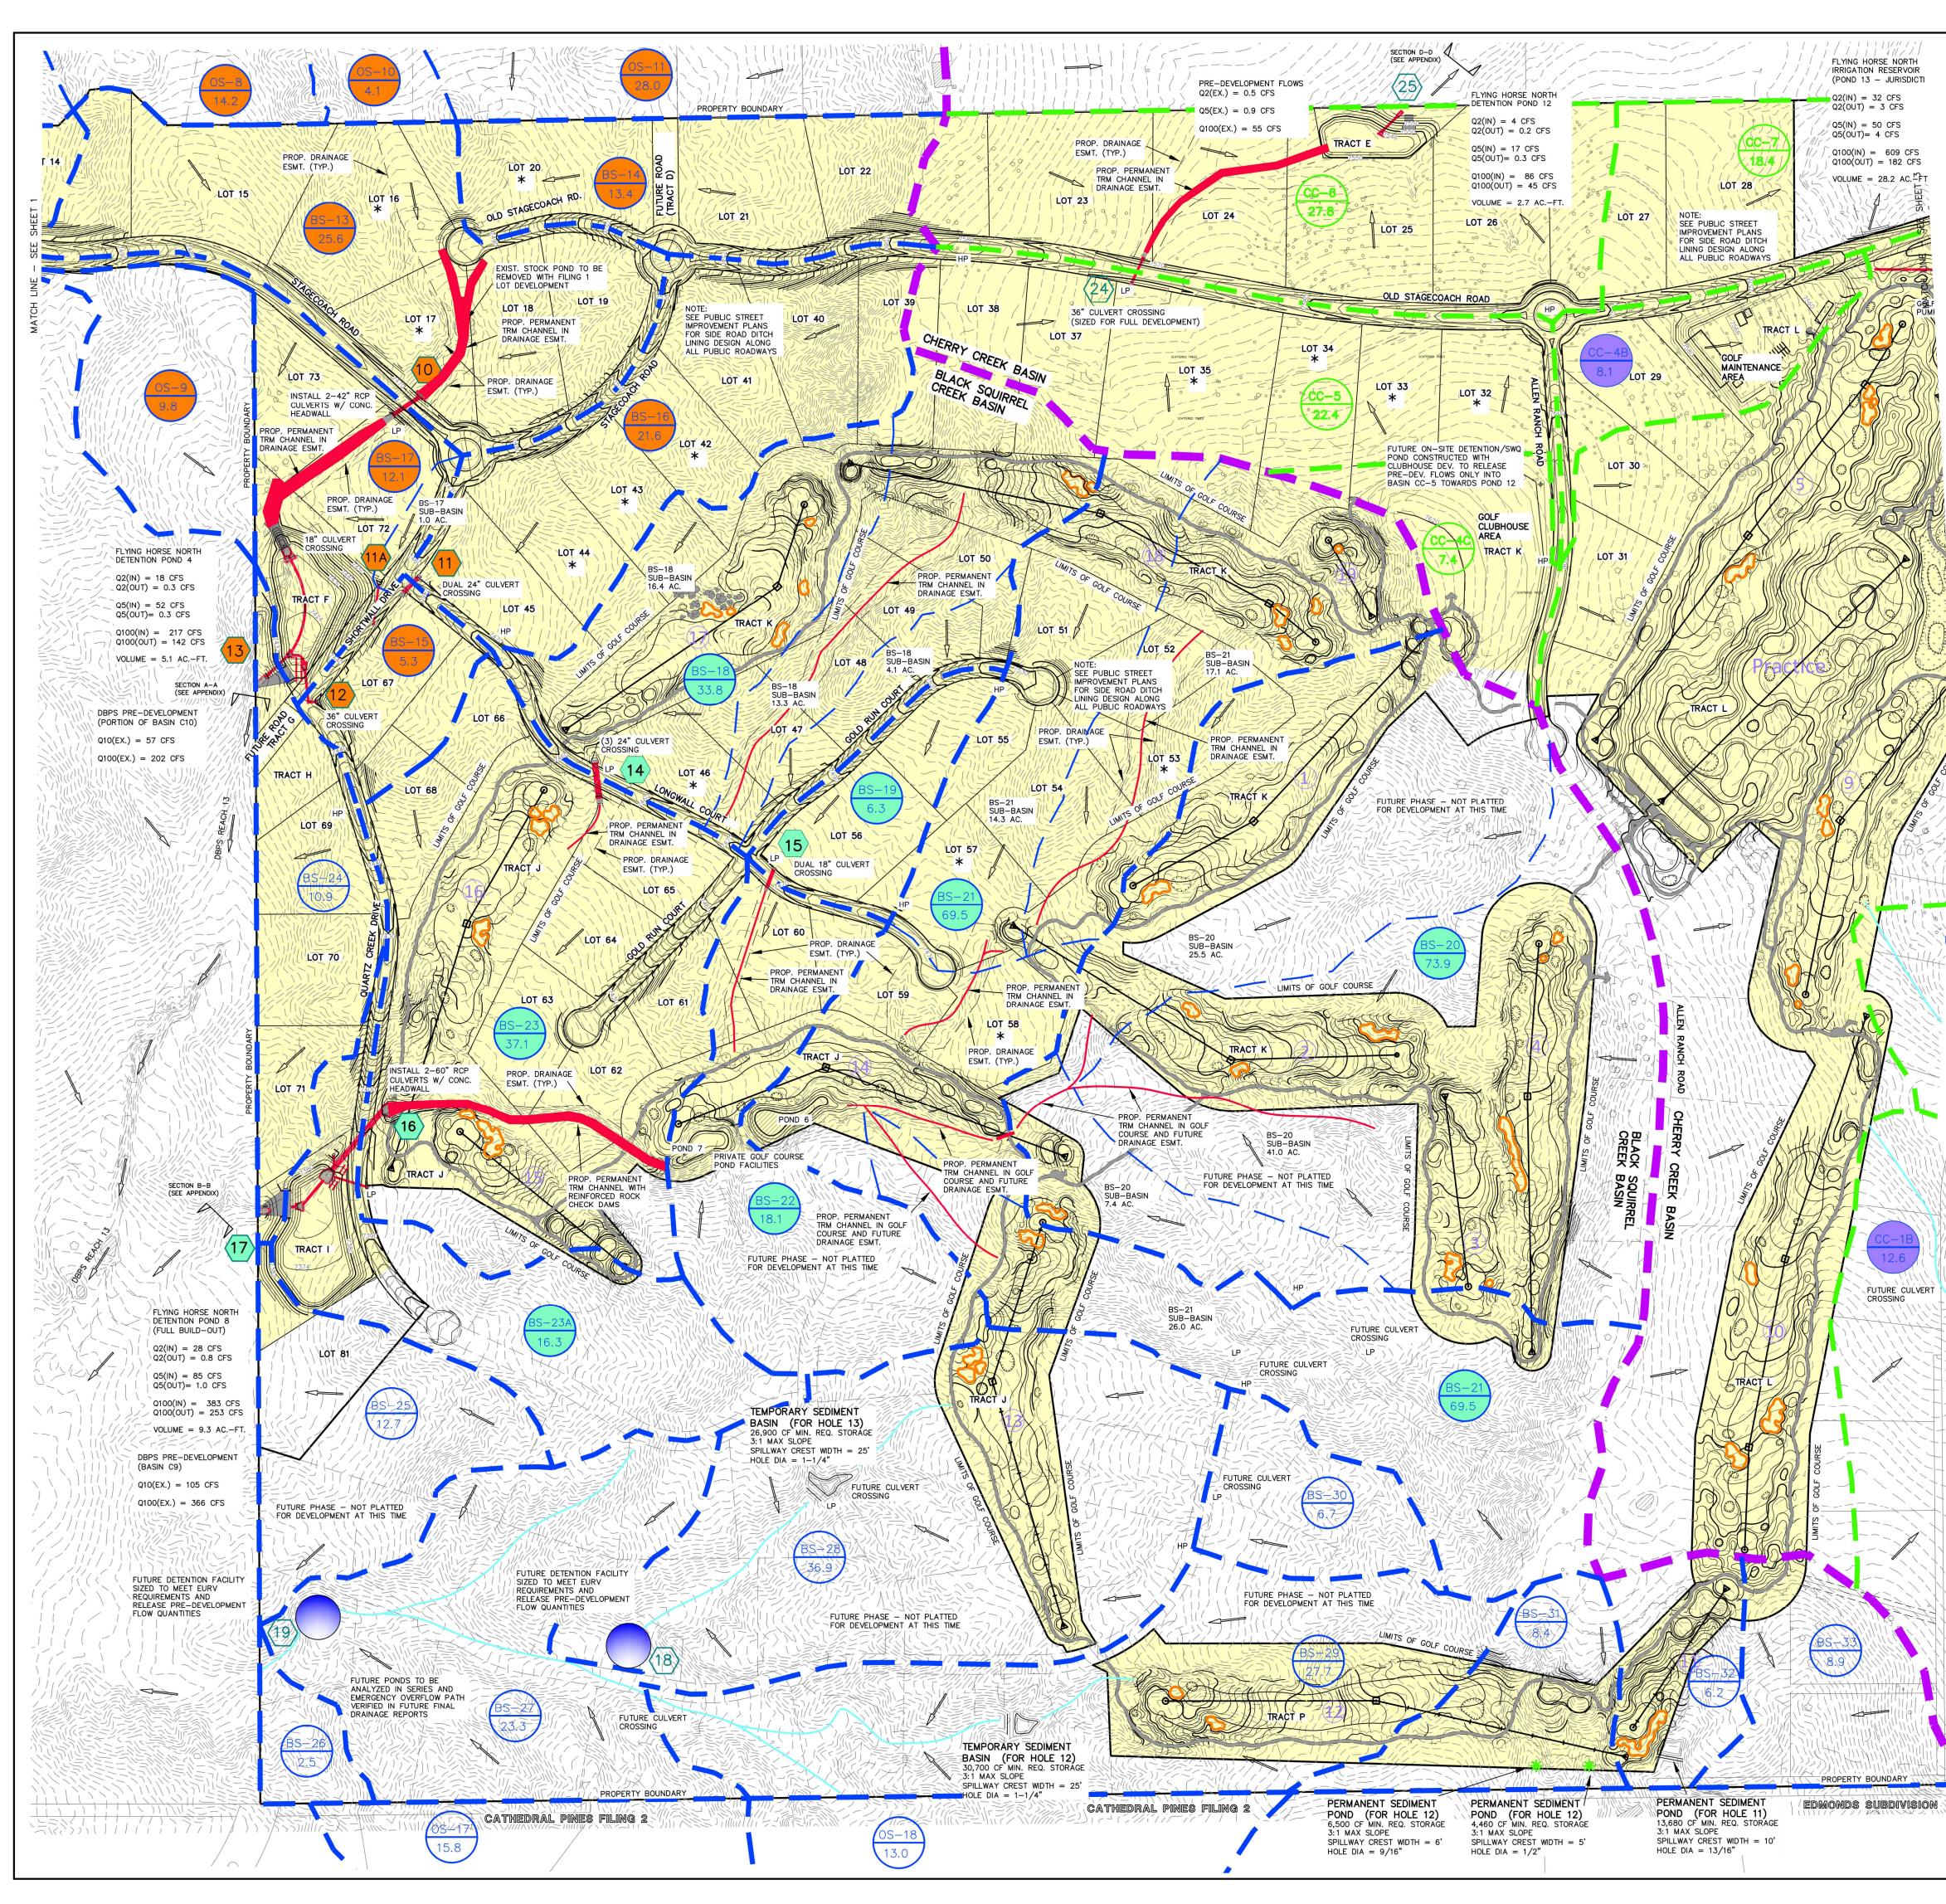

FLYING HORSE NORTH / IRRIGATION RESERVOIR (POND 13 - JURISDICTI Q2(IN) = 32 CFS

Q2(OUT) = 3 CFS $\sqrt{Q5(IN)} = 50 \text{ CFS}$ Q5(OUT)= 4 CFS

Q100(IN) = 609 CFSQ100(OUT) = 182 CFSVOLUME = 28.2 AC. FT


> FUTURE CULVERT CROSSING

BASIN SUMMARY - DEVELOPED CONDITIONS

		COMPOSITE	TOTAL	Q	Q	Q
BASIN	AREA	CN	LAG TIME	2 Yr.	5 Yr.	100 Yr
(label)	(acres)		(hours)	(cfs)	(cfs)	(cfs)
OS-8	14.20	65.0	0.27	2.1	6.2	24.7
OS-9	9.80	60.0	0.37	0.1	1.0	9.1
OS-10	4.10	65.0	0.17	0.7	2.1	8.2
OS-10 OS-11	28.00	65.0	0.35	2.4	8.2	38.7
OS-12	68.10	62.7	0.37	2.4	11.9	75.8
OS-12 OS-13	36.90	63.0	0.33	1.4	7.4	45.0
OS-14	26.40	62.0	0.31	0.7	4.6	31.0
OS-14 OS-15	70.80	63.9	0.31	3.3	14.8	84.2
OS-16	4.50	65.0	0.24	0.4	14.0	7.2
OS-10 OS-17	15.80	65.0	0.24	1.6	5.9	27.7
OS-17 OS-18	13.00	65.0	0.19	1.3	4.7	27.7
03-16	13.00	05.0	0.20	1.5	4.7	22.0
BS-13	25.60	65.0	0.23	3.7	10.2	40.7
BS-13 BS-14			0.23			26.5
	13.40	65.0		2.6	6.8	
BS-15	5.30	65.0	0.18	1.6	3.7	12.2
BS-16	21.60	65.0	0.34	4.6	11.8	44.1
BS-17	12.10	65.0	0.21	3.1	7.7	26.7
BS-18	33.80	63.6	0.41	3.5	12.4	56.0
BS-19	6.30	65.0	0.18	2.1	4.6	15.0
BS-20	73.90	63.4	0.31	7.4	24.6	112.4
BS-21	69.50	64.3	0.35	7.8	23.9	103.0
BS-22	18.10	64.4	0.22	3.7	9.6	36.5
BS-23	37.10	63.3	0.33	4.5	13.6	58.2
BS-23A	16.30	64.4	0.29	5.5	12.0	38.3
BS-24	10.90	63.0	0.17	0.6	3.3	17.6
EX-24 (Pre-Dev.)	13.20	60.0	0.17	0.2	2.2	17.8
BS-25	12.70	63.0	0.23	0.4	2.7	17.3
BS-26	2.50	60.0	0.18	0.0	0.4	3.4
BS-27	23.30	65.0	0.22	2.1	8.0	38.8
BS-28	36.90	64.4	0.32	2.2	9.3	49.4
BS-29	27.70	64.0	0.33	1.4	6.5	35.9
BS-30	6.70	65.0	0.20	0.7	2.4	11.7
BS-31	8.40	62.5	0.23	0.3	1.9	11.8
BS-32	6.20	62.6	0.20	0.3	1.6	9.4
BS-33	8.90	64.7	0.19	0.8	3.2	15.3
CC-1A	9.80	65.0	0.23	0.8	3.3	16.0
CC-1B	12.60	64.8	0.25	1.0	4.0	19.4
CC-2A	11.00	65.0	0.22	1.0	3.8	18.3
CC-2B	20.80	65.0	0.22	1.9	7.1	34.6
CC-2C	6.40	65.0	0.18	0.7	2.5	11.5
CC-3	52.50	63.1	0.43	1.8	8.8	54.5
CC-4A	108.70	62.6	0.44	15.4	39.0	156.0
CC-4B	8.10	76.1	0.26	4.0	7.3	20.6
CC-4C (Pre-Dev.)	7.40	61.0	0.13	0.2	1.8	11.2
CC-5	22.40	65.0	0.26	1.8	7.1	34.3
CC-6	27.80	65.0	0.25	2.3	9.1	43.2
CC-7	18.40	65.0	0.29	1.4	5.4	27.0

DESIGN POINTS SURFACE ROUTING SUMMARY - DEVELOPED CONDITIONS

		Q	Q	Q
Design Point	Contributing Basins	2 Yr.	5 Yr.	100 Yr.
(label)		Q (cfs)	Q (cfs)	Q (cfs)
DP-10 DEV	OS-8, OS-10, OS-11, BS-13, BS- 14	10.7	32.0	143
DP-11 DEV	BS-16	4.6	11.8	36
DP-12 DEV	DP-11, 1.0 Ac. Portion of BS-17 and BS-15	4.2	11.8	46
TOTAL INFLOW TO POND 4 (UD Detention hydrograph)	DP-10, DP-12, BS-17, OS-9	10 16		217
DP-13 DEV	Release from FHN Pond 4	0.3	<mark>0.</mark> 3	142
DP-14 DEV	BS-18	3.5	12.4	56
DP-15 DEV	BS-19	2.1	4.6	15
DP-16 DEV	DP-14, DP-15, BS-20, BS-21, BS-22, BS-23	25.0	78.0	362
TOTAL INFLOW TO FHN POND 8 (Full Build-out) (UD Detention hydrograph)	DP-10, DP-12, BS-17, OS-9	24	37	390
DP-17 DEV (Full Build-out)	Release from FHN Pond 8	0.8	1.0	253
TOTAL INFLOW TO FHN POND 8 (Filing 1 Only) (UD Detention hydrograph)	DP-10, DP-12, BS-17, OS-9	9	14	301
DP-17 DEV (Filing 1 Only)	Release from FHN Pond 8	0.4	0.5	219
DP-18 DEV	BS-28, BS-29, BS-30, OS-18	5.0	21.6	115
DP-19 DEV	BS-27, OS-17, Release from DP-18	3.8	16.8	126
DP-20 DEV	CC-1A, OS-12	3.2	14.3	88
DP-21 DEV	CC-2A, OS-13	2.1	10.5	62
DP-22 DEV	CC-2B, Release from DP-21	3.7	16.6	92
DP-23 DEV	CC-3, OS-14	2.5	13.0	84
DP-24 DEV	CC-4C (Pre-Dev.), CC-5	1.9	8.4	45
TOTAL INFLOW TO POND 12 (UD Detention hydrograph)	CC-4C, CC-5, CC-6	6	9	85
DP-25 DEV	Release from FHN Pond 12	0.2	0.3	45

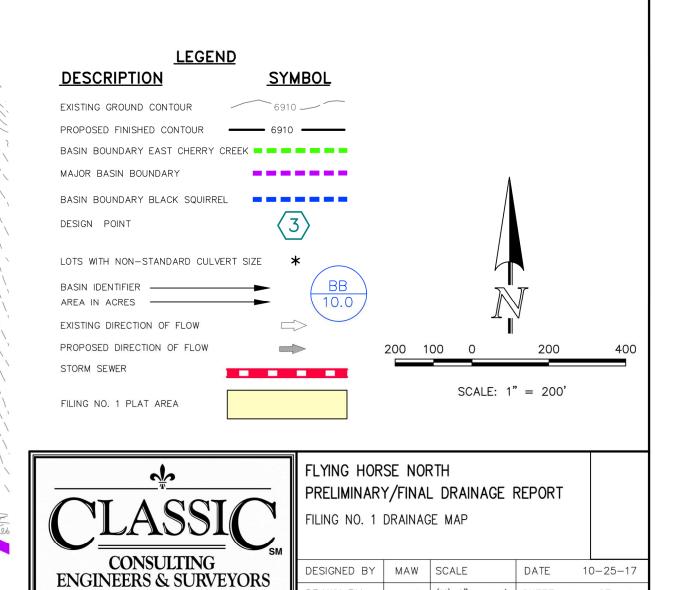

CHECKED BY

619 N. Cascade Avenue, Suite 200


Colorado Springs, Colorado 80903 (719)785-0799 (Fax)

(719)785-0790

RAWN BY MAW (H) 1"= 200' SHEET 2 OF 4

(V) 1"= N/A JOB NO.

1096.11

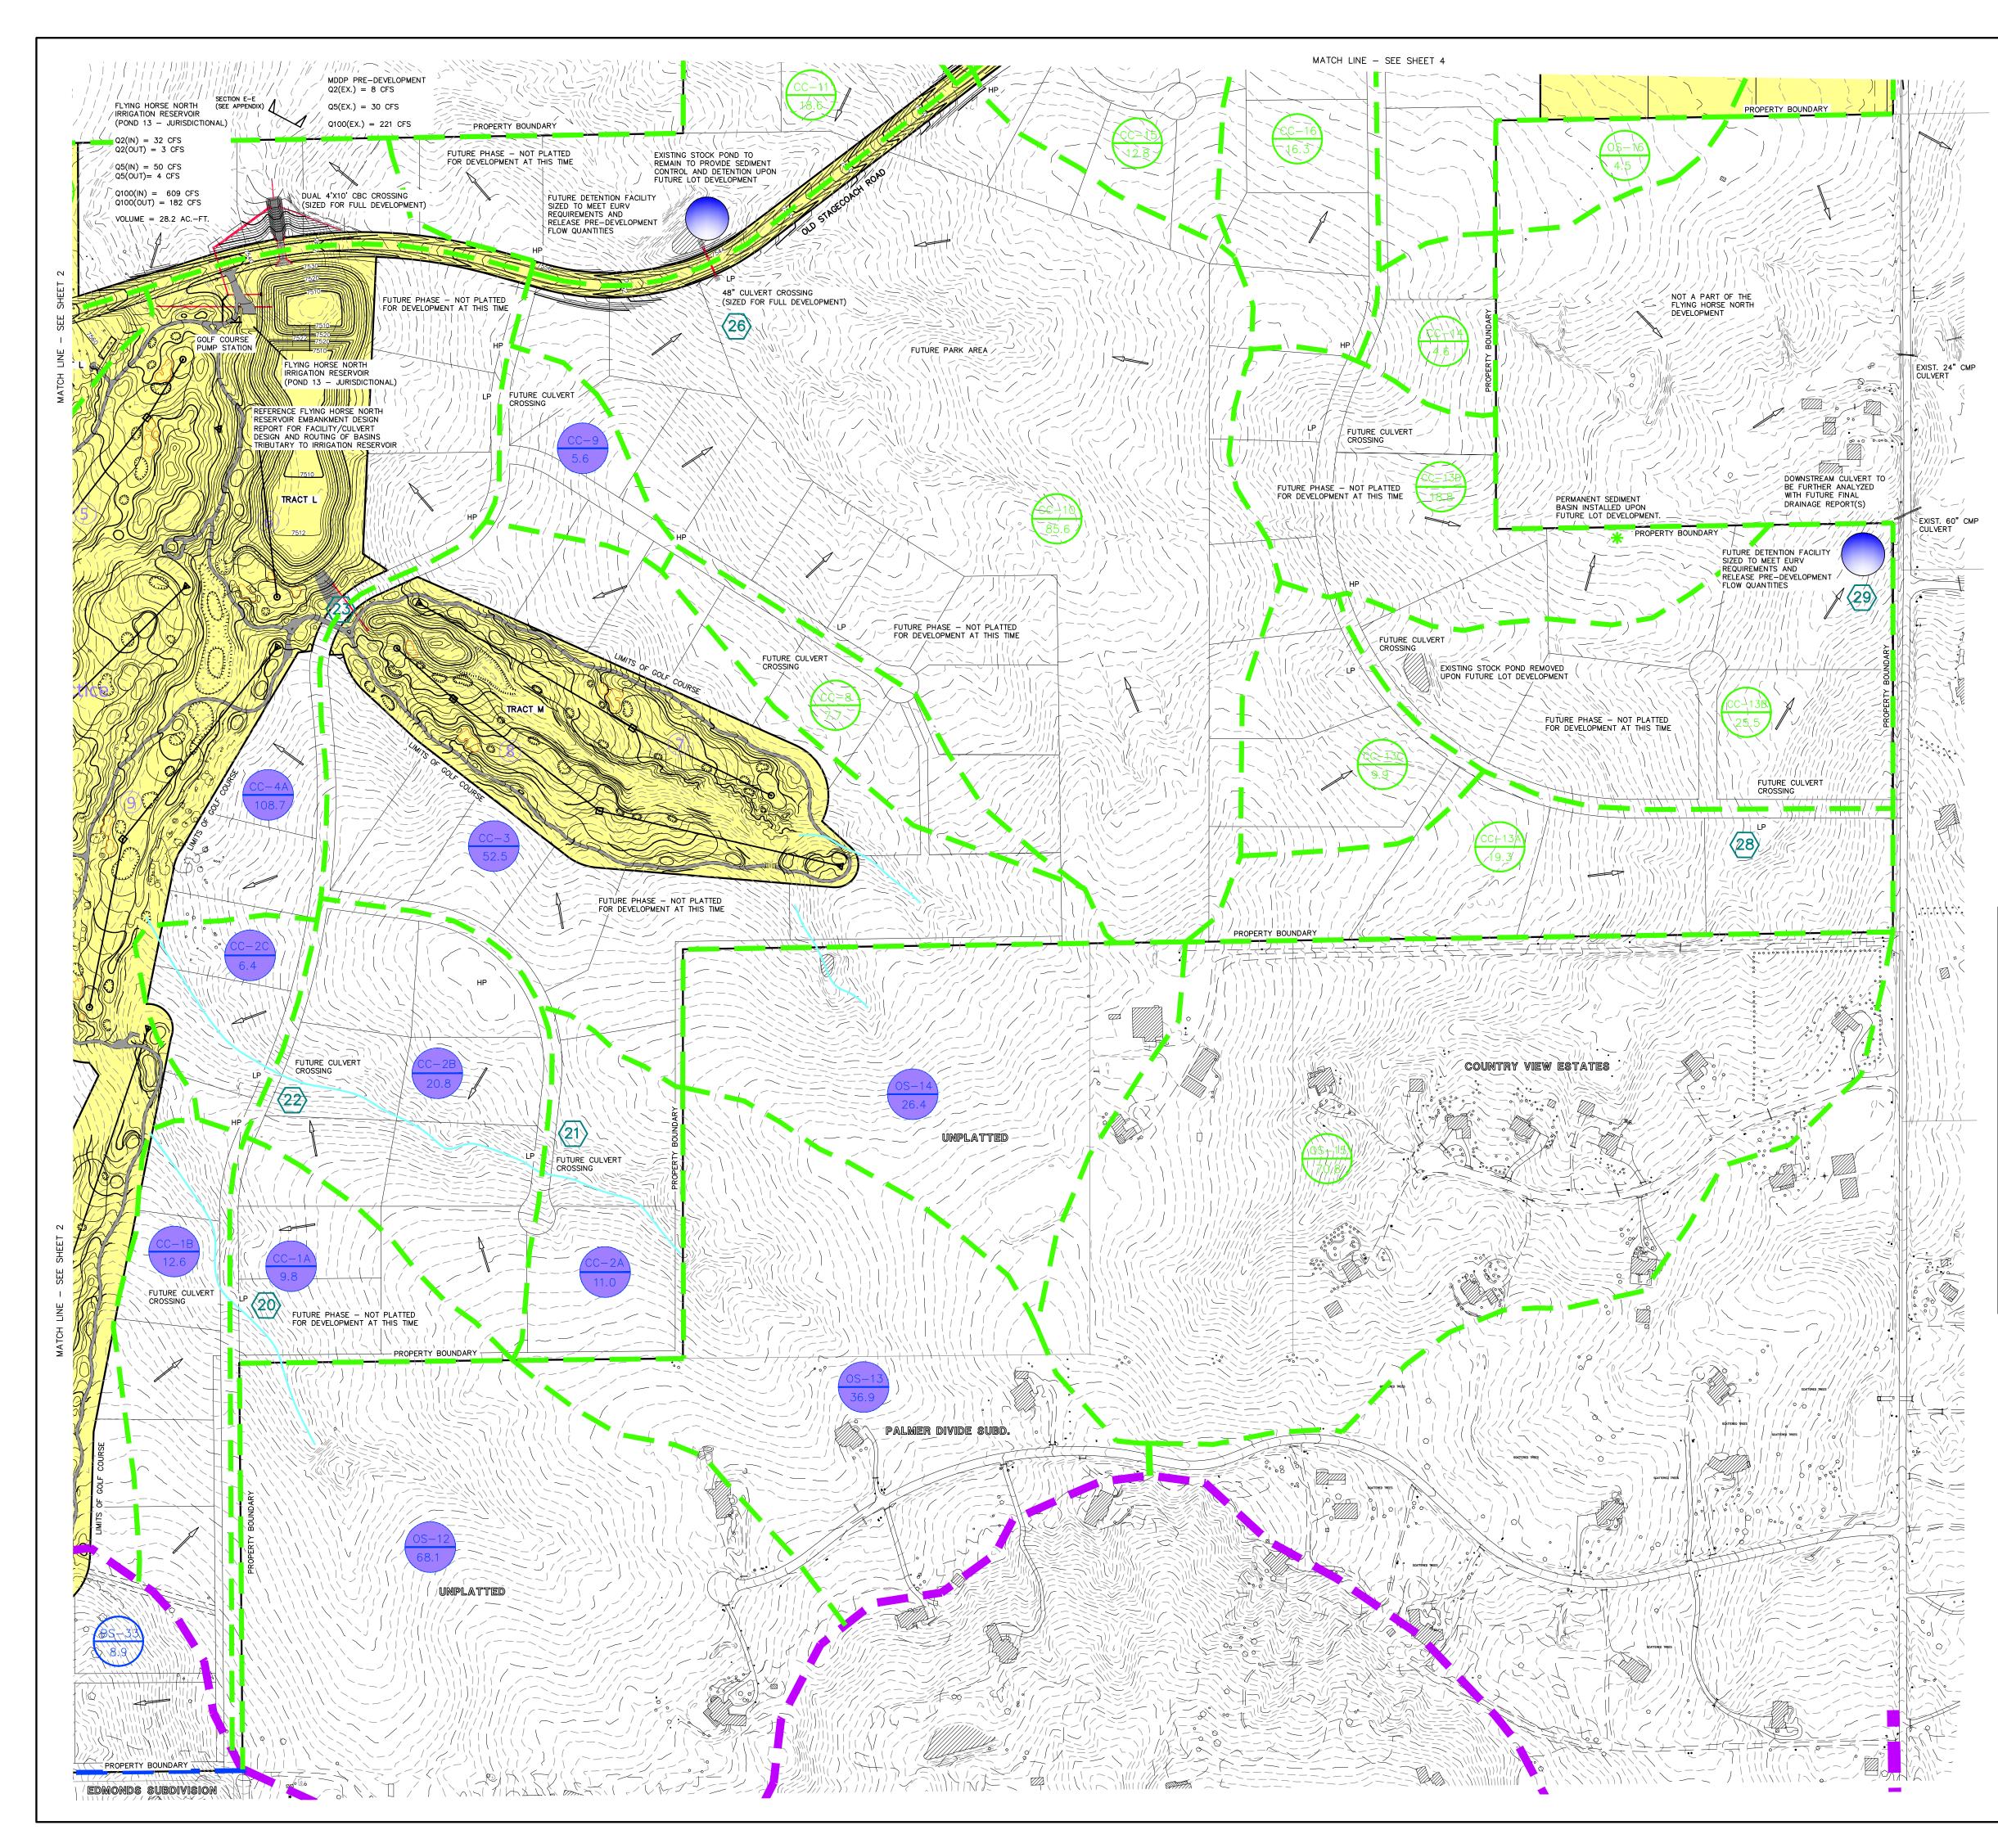


9611\REPORTS\FILING 1\10961'FJR _ JM.dwa, 5/14/2018 9:36:26 AM, 1:1.02065


BASIN SUMMARY - DEVELOPED CONDITIONS

		COMPOSITE	TOTAL	Q	Q	Q
BASIN	AREA	CN	LAG TIME	2 Yr.	5 Yr.	100 Yr
(label)	(acres)		(hours)	(cfs)	(cfs)	(cfs)
OS-8	14.20	65.0	0.27	2.1	6.2	24.7
OS-9	9.80	60.0	0.37	0.1	1.0	9.1
OS-10	4.10	65.0	0.17	0.7	2.1	8.2
O\$-11	28.00	65.0	0.35	2.4	8.2	38.7
O\$-12	68.10	62.7	0.37	2.2	11.9	75.8
OS-13	36.90	63.0	0.33	1.4	7.4	45.0
OS-14	26.40	62.0	0.31	0.7	4.6	31.0
O\$-15	70.80	63.9	0.38	3.3	14.8	84.2
OS-16	4.50	65.0	0.24	0.4	1.5	7.2
OS-17	15.80	65.0	0.19	1.6	5.9	27.7
OS-18	13.00	65.0	0.10	1.3	4.7	22.6
00-10	10.00	00.0	0.20	1.0	4.1	22.0
CC-1A	9.80	65.0	0.23	0.8	3.3	16.0
CC-18	12.60	64.8	0.25	1.0	4.0	19.4
CC-2A	11.00	65.0	0.20	1.0	3.8	18.3
CC-2R	20.80	65.0	0.22	1.9	7.1	34.6
CC-2D CC-2C	6.40	65.0	0.22	0.7	2.5	11.5
CC-3	52.50	63.1	0.10	1.8	8.8	54.5
CC-4A	108.70	62.6	0.43	15.4	39.0	156.0
CC-4A CC-4B						
•••	8.10	76.1	0.26	4.0	7.3	20.6
CC-4C (Pre-Dev.)	7.40	61.0	0.13	0.2	1.8	11.2
CC-5	22.40	65.0	0.26	1.8	7.1	34.3
CC-6	27.80	65.0	0.25	2.3	9.1	43.2
CC-7	18.40	65.0	0.29	1.4	5.4	27.0
CC-8	7.70	65.0	0.25	0.6	2.5	12.0
CC-9	5.60	65.0	0.19	0.6	2.1	9.8
CC-10	85.60	62.6	0.39	2.6	14.1	91.9
CC-11	18.60	63.1	0.21	0.9	5.0	28.1
CC-12	12.20	65.0	0.26	1.0	3.9	18.7
CC-13A	19.30	65.0	0.31	1.4	5.4	27.3
CC-13B	25.50	65.0	0.31	1.8	7.2	36.1
CC-13C	9.90	65.0	0.22	0.9	3.4	16.5
CC-13D	18.80	65.0	0.25	1.5	6.2	29.2
CC-14	4.60	65.0	0.21	0.4	1.6	7.8
CC-15	12.80	65.0	0.24	1.1	4.3	20.4
CC-16	16.30	65.0	0.30	1.2	4.6	23.6
CC-17	25.00	65.0	0.35	1.7	6.5	32.8
CC-18	6.20	66.5	0.30	0.7	2.2	9.7
CC-19	3.70	65.0	0.25	0.3	1.2	5.8
CC-20	39.30	65.0	0.25	3.2	12.9	61.0
CC-21	6.20	61.0	0.20	0.1	1.2	8.5
CC-22	13.80	65.0	0.25	1.1	4.5	21.4
CC-23	5.70	64.7	0.33	0.4	1.5	7.7
CC-24	39.60	65.0	0.25	3.3	13.0	61.5
CC-25	3.50	65.0	0.23	0.3	1.2	5.7
CC-26	16.70	65.0	0.26	1.4	5.3	25.6
CC-27	18.90	64.4	0.31	1.2	4.9	25.8
CC-28	154.80	64.4	0.63	6.5	24.7	136.3


DESIGN POINTS SURFACE ROUTING SUMMARY - DEVELOPED CONDITIONS

Design Point (label)	Contributing Basins	Q 2 Yr. Q (cfs)	Q 5 Yr. Q (cfs)	Q 100 Yr. Q (cfs)
DP-20 DEV	CC-1A, OS-12	3.2	14.3	88
DP-21 DEV	CC-2A, OS-13	2.1	10.5	62
DP-22 DEV	CC-2B, Release from DP-21	3.7	16.6	92
DP-23 DEV	CC-3, OS-14	2.5	13.0	84
DP-24 DEV	CC-4C (Pre-Dev.), CC-5	1.9	8.4	45
TOTAL INFLOW TO POND 12 (UD Detention hydrograph)	CC-4C, CC-5, CC-6	C-4C, CC-5, CC-6 6		85
DP-25 DEV	Release from FHN Pond 12	0.2	0.3	45
DP-26 DEV	CC-8, CC-10	3.0	15.9	102
DP-27 DEV	CC-15, CC-20	4.3	17.2	81
DP-28 DEV	CC-13A, OS-15	4.6	19.8	110
DP-29 DEV	CC-13B, CC-13C, Release from DP-28	5.8	26.6	155
DP-30 DEV	CC-18	0.7	2.2	10
DP-31 DEV	CC-19, Release from DP-30	0.9	3.2	15
DP-32 DEV	CC-17, OS-16	2.0	7.8	40
DP-33 DEV	DP-33 DEV CC-23, CC-24		14.4	69
DP-34 DEV	CC-26, CC-27, CC-28 and Release from CC-16 & DP-32	6.0	23.5	168

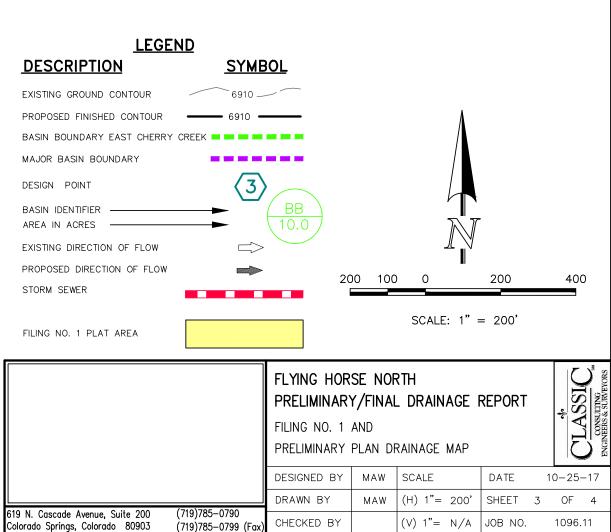

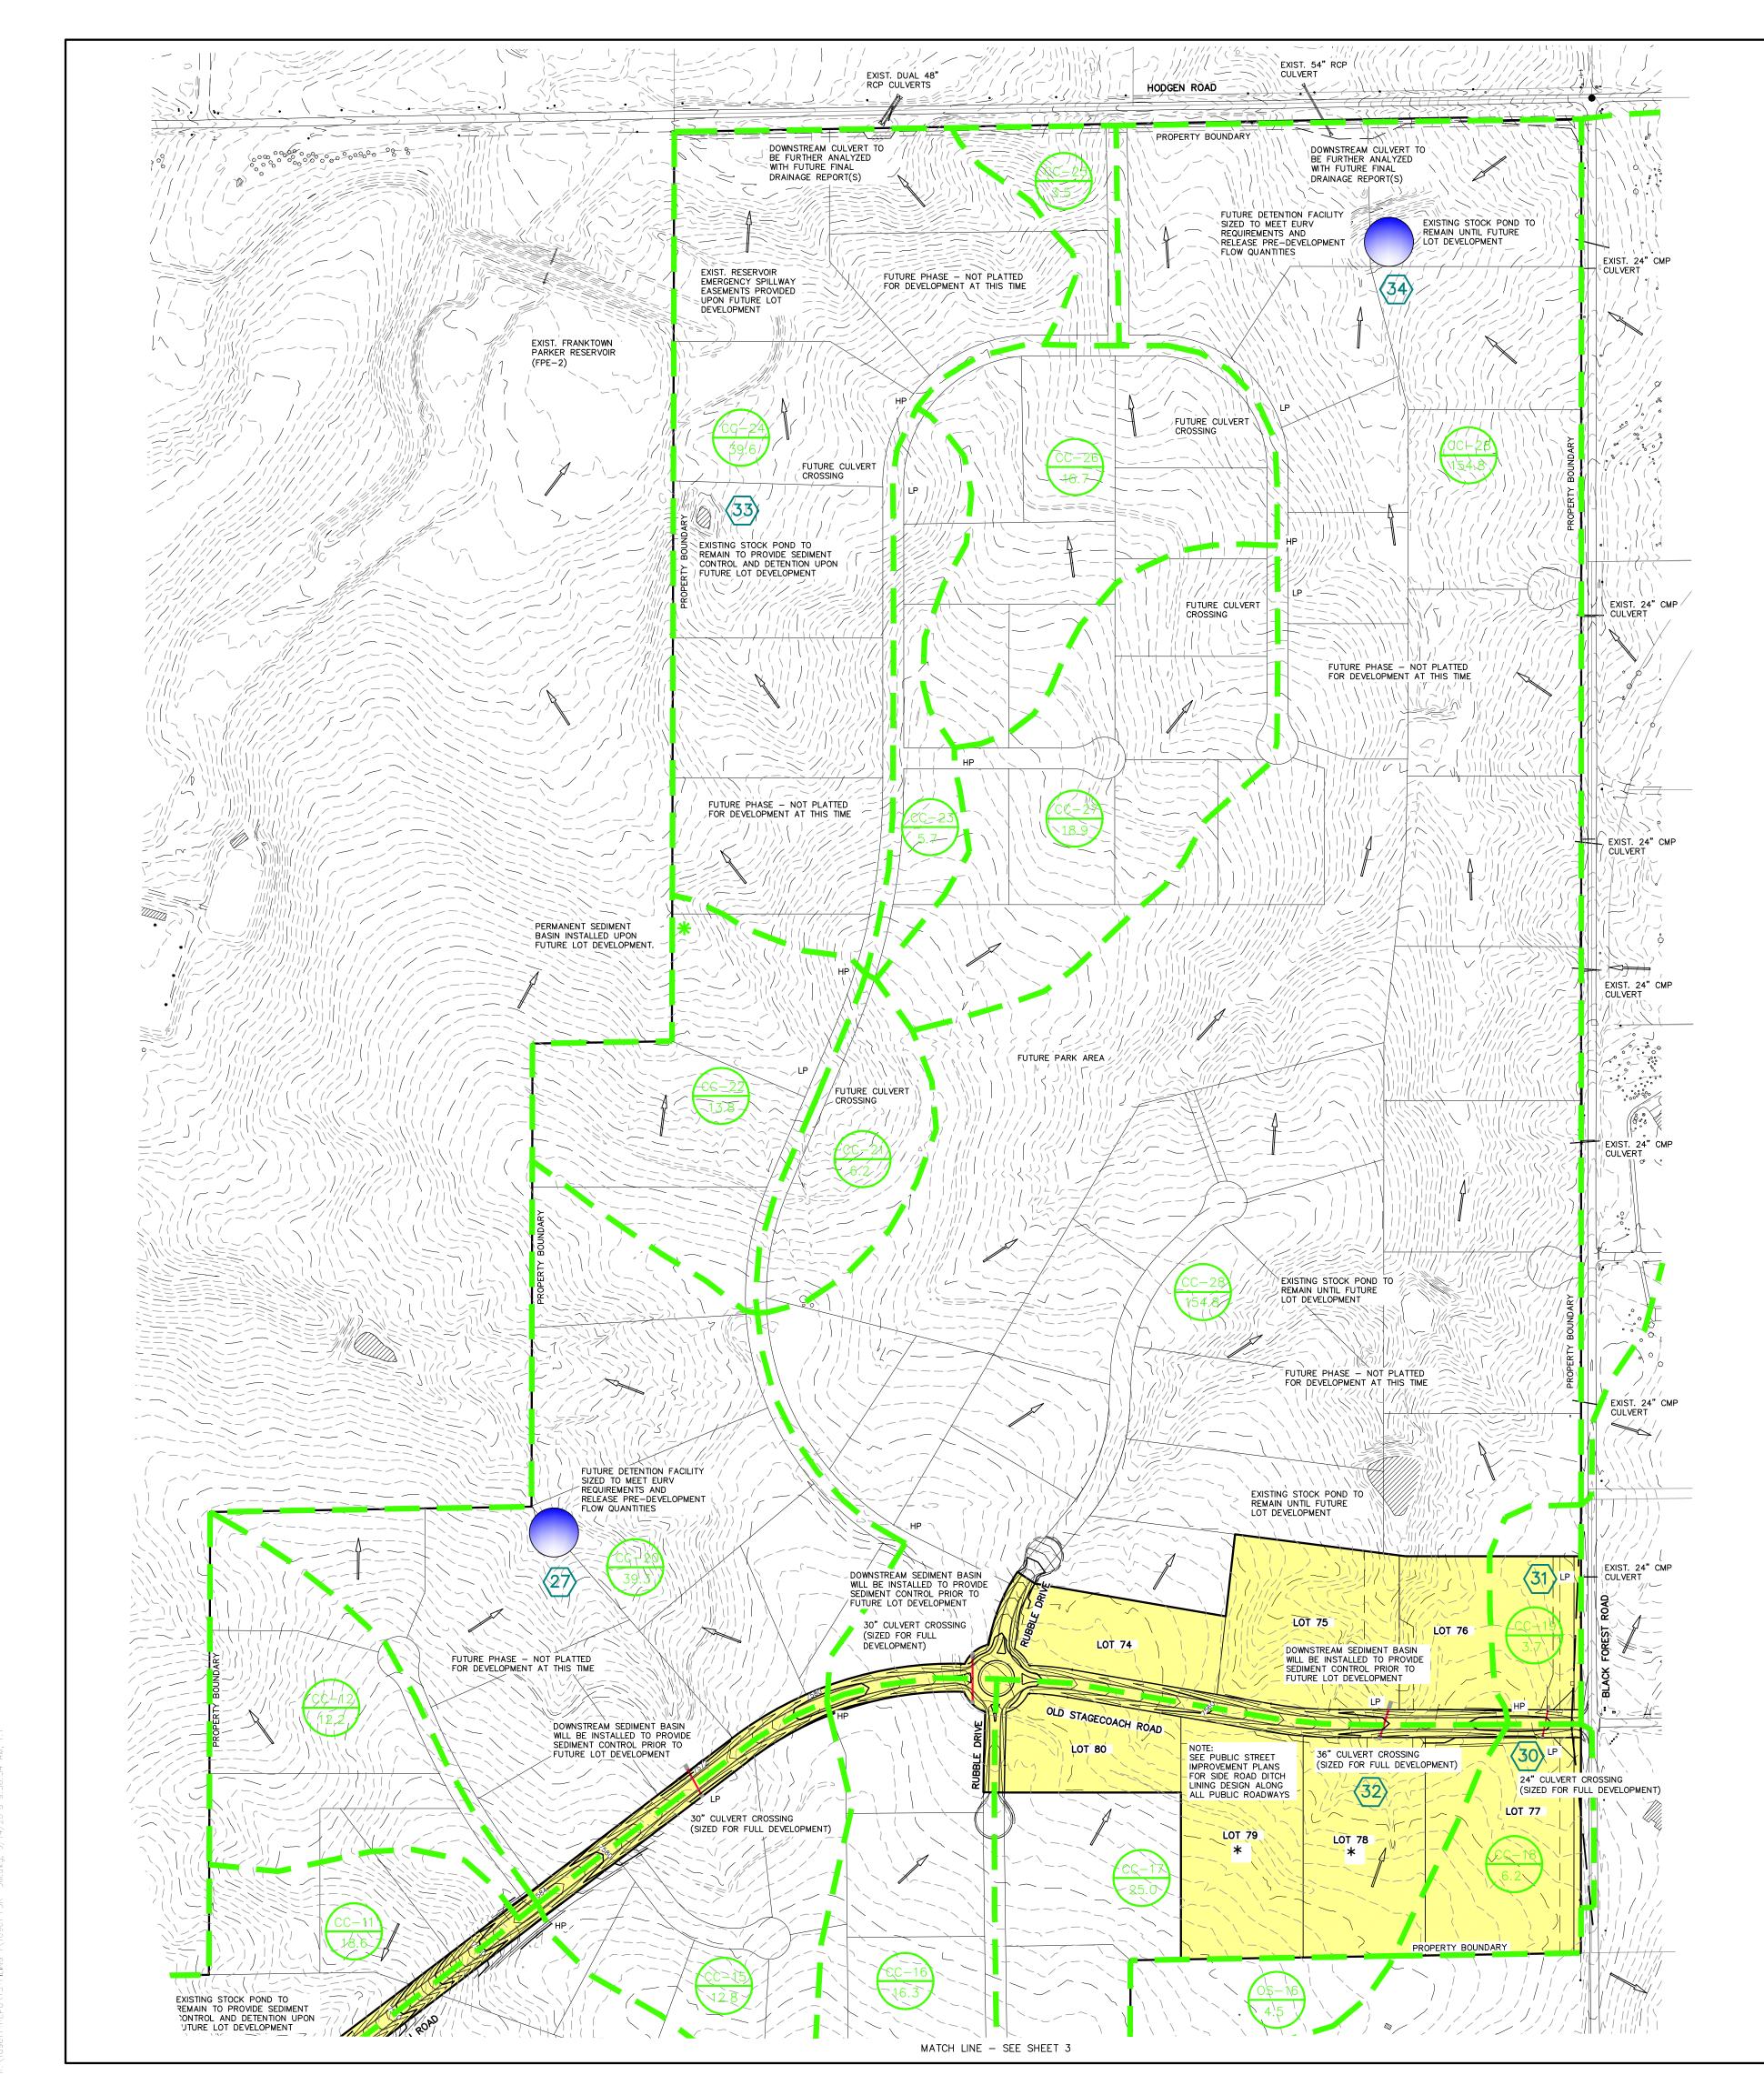

1:1 M 13:35:0 8:00/11/3 0.00 MC GC3/10001/1 0.01 GC36:54

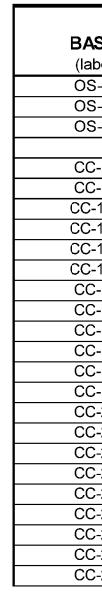


DESIGN POINTS SURFACE ROUTING SUMMARY - DEVELOPED CONDITIONS


Design Point (label)	Contributing Basins	Q 2 Yr. Q (cfs)	Q 5 Yr. Q (cfs)	Q 100 Yr. Q (cfs)
DP-27 DEV	CC-15, CC-20	4.3	17.2	81
DP-28 DEV	CC-13A, OS-15	4.6	19.8	110
DP-29 DEV	CC-13B, CC-13C, Release from DP-28	5.8	26.6	155
DP-30 DEV	CC-18	0.7	2.2	10
DP-31 DEV	CC-19, Release from DP-30	0.9	3.2	15
DP-32 DEV	CC-17, OS-16	2.0	7.8	40
DP-33 DEV	CC-23, CC-24	3.6	14.4	69
DP-34 DEV	CC-26, CC-27, CC-28 and Release from CC-16 & DP-32	6.0	23.5	168

		COMPOSITE	TOTAL	Ø	Q	Q
SIN	AREA	CN	LAG TIME	2 Yr.	5 Yr.	100 Yr.
abel)	(acres)		(hours)	(cfs)	(cfs)	(cfs)
S-16	4.50	65.0	0.24	0.4	1.5	7.2
S-17	15.80	65.0	0.19	1.6	5.9	27.7
S-18	13.00	65.0	0.20	1.3	4.7	22.6
C-11	18.60	63.1	0.21	0.9	5.0	28.1
C-12	12.20	65.0	0.26	1.0	3.9	18.7
-13A	19.30	65.0	0.31	1.4	5.4	27.3
-13B	25.50	65.0	0.31	1.8	7.2	36.1
-13C	9.90	65.0	0.22	0.9	3.4	16.5
-13D	18.80	65.0	0.25	1.5	6.2	29.2
C-14	4.60	65.0	0.21	0.4	1.6	7.8
C-15	12.80	65.0	0.24	1.1	4.3	20.4
C-16	16.30	65.0	0.30	1.2	4.6	23.6
C-17	25.00	65.0	0.35	1.7	6.5	32.8
C-18	6.20	66.5	0.30	0.7	2.2	9.7
C-19	3.70	65.0	0.25	0.3	1.2	5.8
C-20	39.30	65.0	0.25	3.2	12.9	61.0
C-21	6.20	61.0	0.20	0.1	1.2	8.5
C-22	13.80	65.0	0.25	1.1	4.5	21.4
C-23	5.70	64.7	0.33	0.4	1.5	7.7
C-24	39.60	65.0	0.25	3.3	13.0	61.5
C-25	3.50	65.0	0.23	0.3	1.2	5.7
C-26	16.70	65.0	0.26	1.4	5.3	25.6
C-27	18.90	64.4	0.31	1.2	4.9	25.8
C-28	154.80	64.4	0.63	6.5	24.7	136.3

BASIN SUMMARY - DEVELOPED CONDITIONS

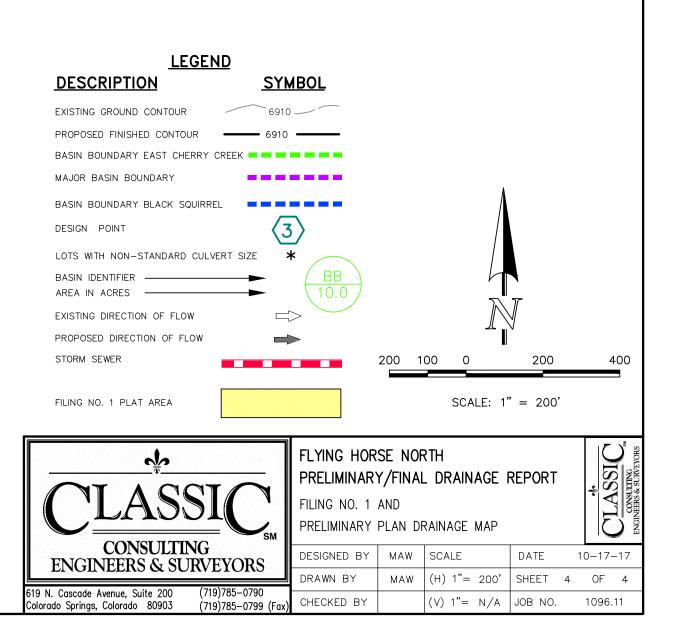



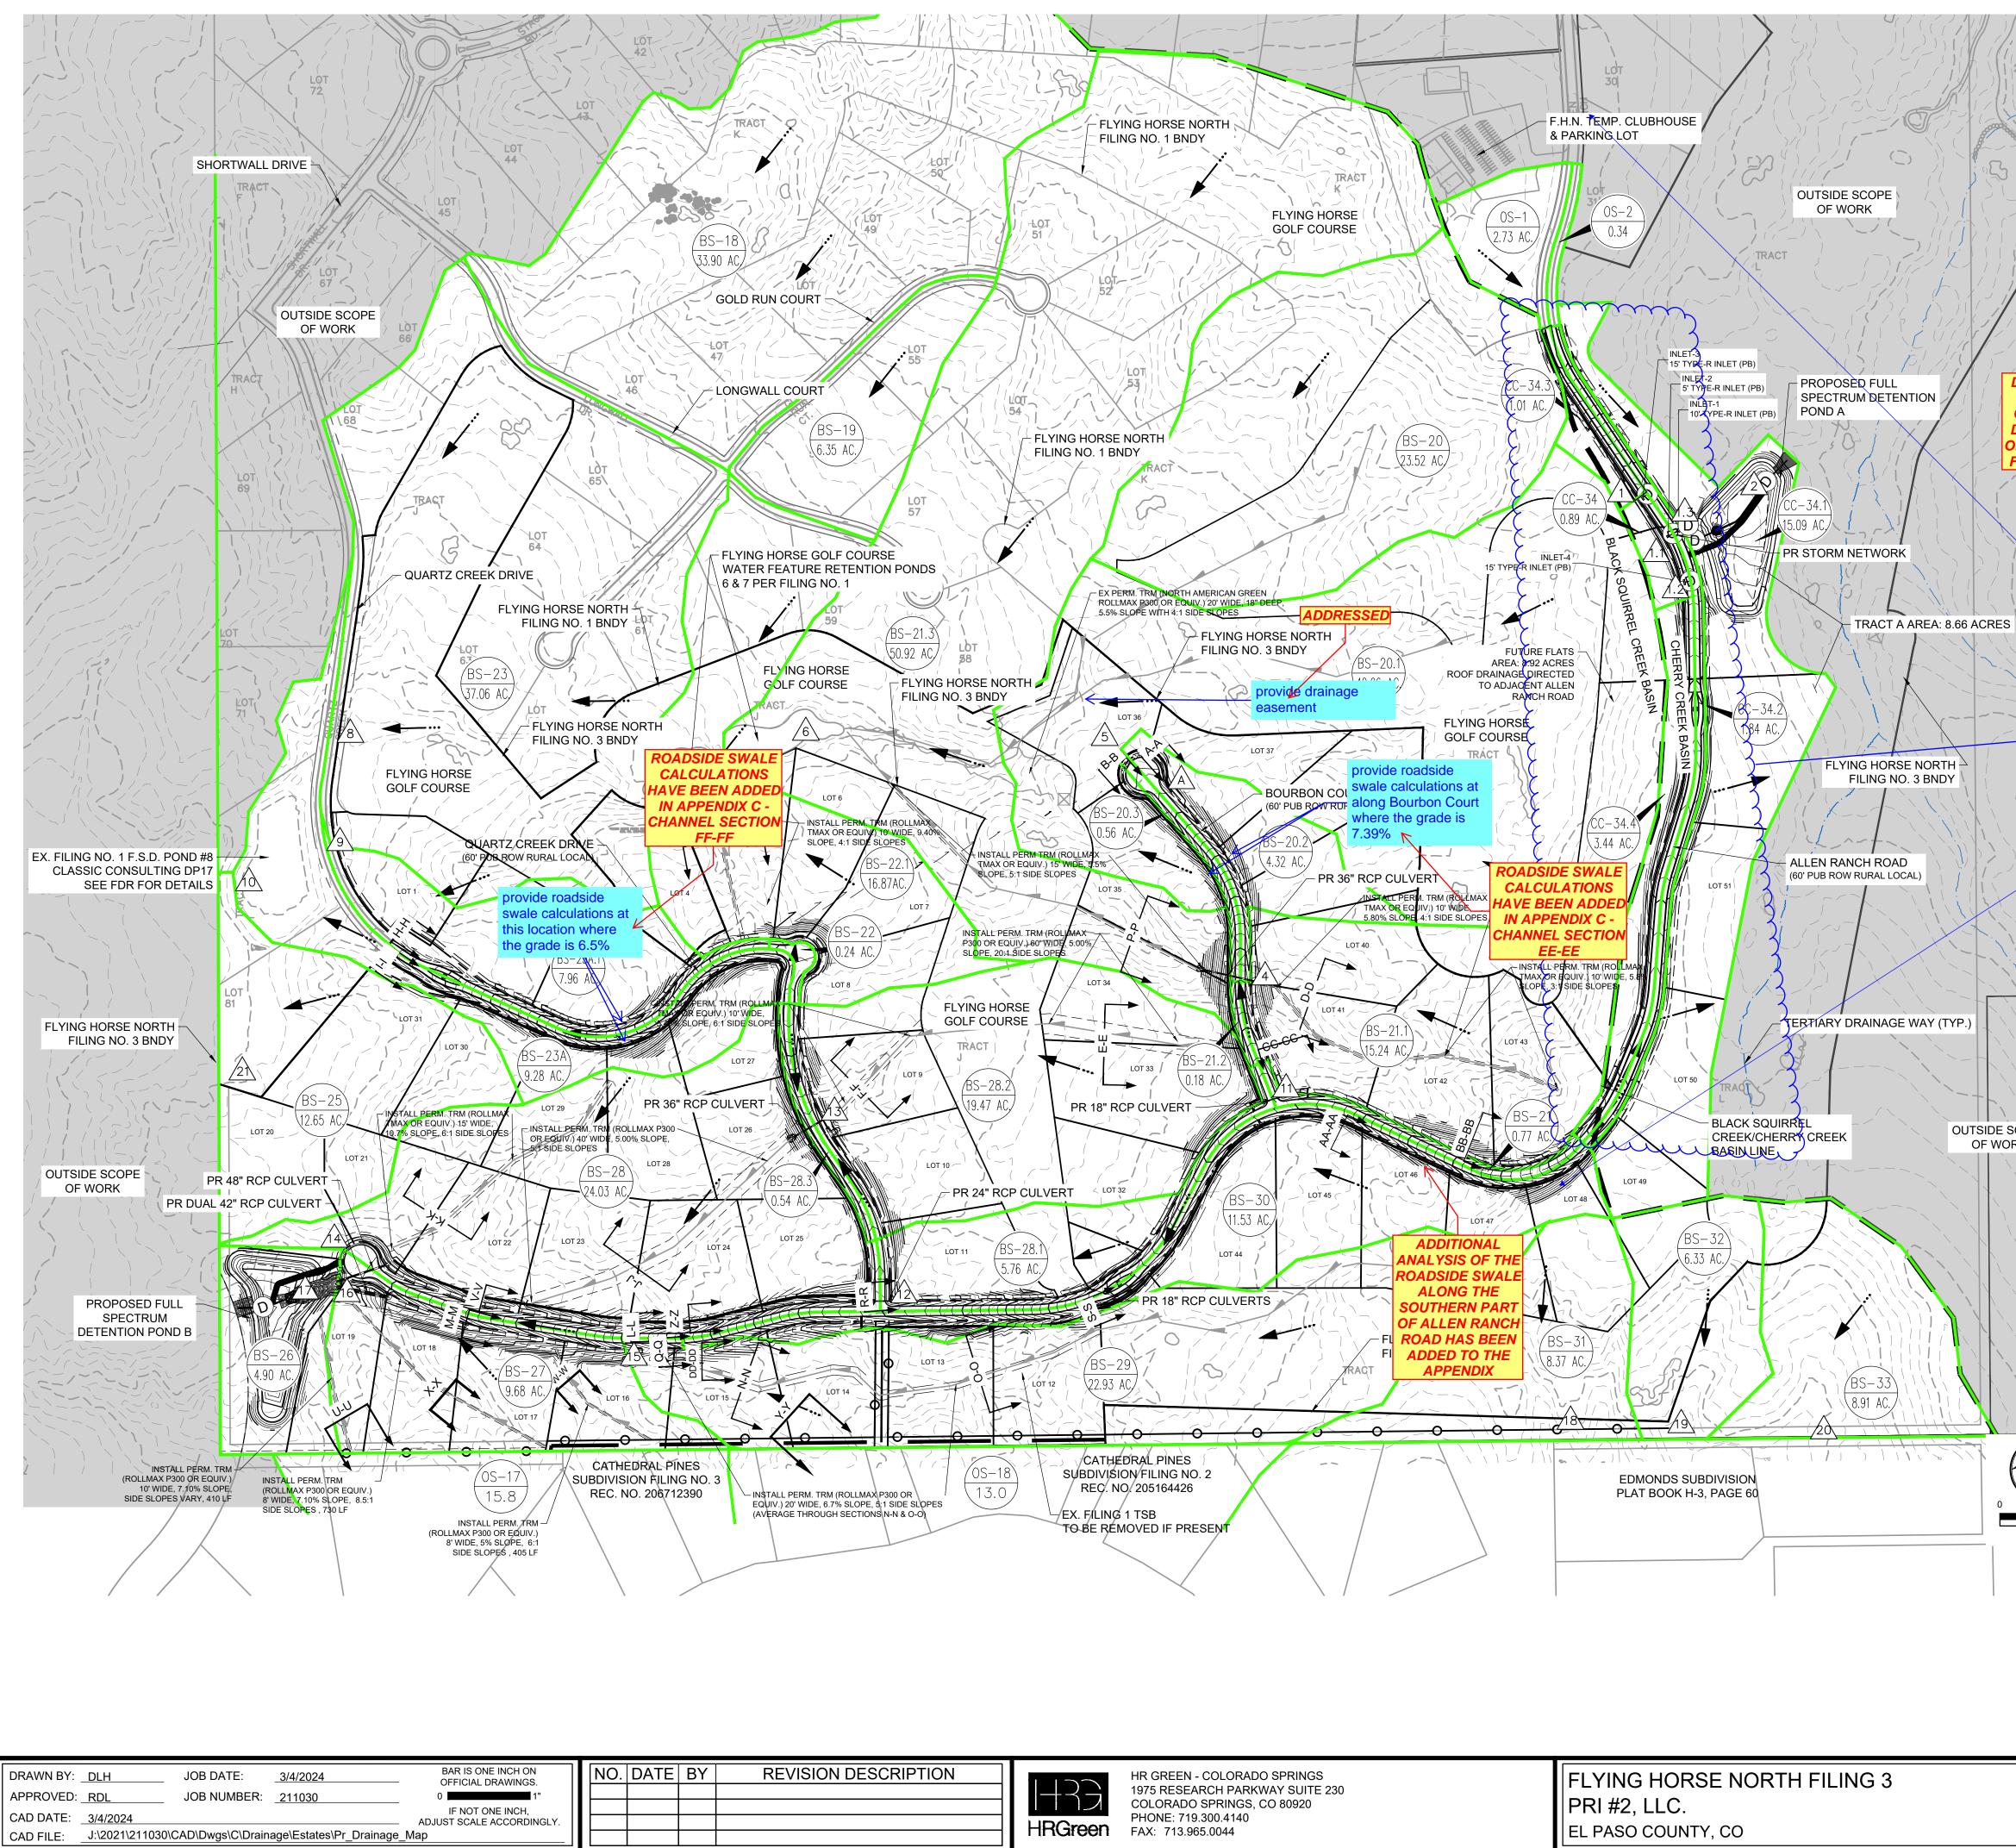

PTION HR GREEN - COLORADO SPRINGS 1975 RESEARCH PARKWAY SUITE 230 COLORADO SPRINGS, CO 80920 PHONE: 719.300.4140 FAX: 713.965.0044	\$
EL FASO COUNTY, CO	

HORSE	
NO. 1 218714238	

OUTSIDE SCOPE

OF WORK

NORTH

SUMMARY RUNOFF TABLE							
BASIN	AREA (ac)	% IMP.	C ₅	C ₁₀₀	Q ₅ (cfs)	Q ₁₀₀ (c ⁻	
BS-18	33.90	7.77	0.14	0.39	12.6	60.1	
BS-19	6.35	11.00	0.17	0.42	4.1	16.8	
BS-20	23.79	6.83	0.13	0.39	9.6	48.5	
BS-20.1	42.26	8.49	0.14	0.39	16.3	77.7	
BS-20.2	4.32	11.00	0.17	0.42	2.5	10.1	
BS-20.3	0.56	100.00	0.90	0.96	2.3	4.1	
BS-21	0.77	100.00	0.90	0.96	3.0	5.4	
BS-21.1	15.24	11.95	0.17	0.42	8.5	34.3	
BS-21.2	0.18	100.00	0.90	0.96	0.8	1.5	
BS-21.3	50.92	7.83	0.14	0.39	17.7	85.0	
BS-22	0.24	100.00	0.90	0.96	1.1	2.0	
BS-22.1	16.87	9.63	0.16	0.41	8.8	38.4	
BS-23A	9.28	8.43	0.14	0.40	4.1	19.0	
BS-23A.1	7.96	10.69	0.17	0.41	4.2	17.4	
BS-23	37.06	7.26	0.13	0.39	15.6	76.7	
BS-25	12.65	8.49	0.15	0.40	6.1	28.1	
BS-26	4.90	3.74	0.10	0.36	1.7	10.6	
BS-27	9.68	11.00	0.17	0.42	5.6	22.9	
BS-28	24.03	11.00	0.17	0.42	12.3	50.6	
BS-28.1	5.76	9.56	0.16	0.41	2.8	12.5	
BS-28.2	19.47	8.75	0.15	0.40	9.0	41.0	
BS-28.3	0.54	100.00	0.90	0.96	2.5	4.5	
BS-29	22.93	7.78	0.14	0.39	8.3	39.7	
BS-30	11.53	10.84	0.17	0.42	4.9	20.4	
BS-31	8.40	4.57	0.11	0.37	3.2	18.6	
BS-32	6.33	6.73	0.13	0.39	3.0	15.4	
BS-33	8.91	10.39	0.16	0.41	5.2	21.9	
CC-34	0.89	26.22	0.28	0.50	1.0	2.9	
CC-34.1	15.09	5.82	0.12	0.38	6.7	36.1	
CC-34.2	1.84	100.00	0.90	0.96	4.9	8.7	
CC-34.3	1.01	40.81	0.40	0.59	1.6	3.9	
CC-34.4	3.44	91.66	0.76	0.83	7.9	14.6	
OS-1	2.70	29.55	0.29	0.51	2.8	8.2	
OS-2	0.34	100.00	0.90	0.96	1.3	2.3	
OS-17	15.80	11.00	0.17	0.42	9.9	40.6	
					1		


DISCUSSIONS WITH THE COUNTY HAVE **CONCLUDED THAT THE DESIGN WILL REMAIN IN** ORDER TO ACCOUNT FOR

\mathbf{i}			_				
	County	yould not support					
		len Ranch road					
	transition	n from rural to urban					
	and back	to rural. If Allen					
	Ranch ro	bad traffic is not					
	triagering	g an urban cross	IN POINT SUMMARY				
		at this stage it should					
		ural at this stage of the	IS	ΣQ_5 (cfs)	Σ Q ₁₀₀		
		nent. Please revise the		4.4	12		
		ccordingly.		1.2	7.		
	1.2	CC-34.4		7.9	14		
	1.3	CC-34.2, OS-2		6.2	11		
	2	CC-34-34.4, OS-1-2		26.2	76		
	4	BS-21.1	8.5	34			
	5	BS-20.2-20.3		4.7	14		
	6	BS-20-20.3, 21.1-21.	3	57.7	26		
	7	BS-19, BS-22-22.1, D	P6	71.7	318		
	8	BS-18, 23, DP7		99.8	458		
	9	BS-23A.1	4.2	17			
	10	BS-23A, DP8, DP9	108.1	491			
	11	BS-21	3.0	5.			
	12	BS-28.1, DP11	5.9	17			
	13	BS-28.2	9.0	41			
	14	BS-28, BS-28.3, DP12, I	29.7 21.4	114			
	15		OS-18, BS-29-30		93		
	16	OS-17, BS-27, DP1	36.9	157			
	17	BS-26, DP14, DP16		68.2	28		
	18	BS-31		3.2	18		
	19	BS-32		3.0	15		
20 BC 33				L 67	1 21		

FUTURE DEVELOPMENT


	oad traffic is not g an urban cross	N POINT SUMMARY TABLE					
ction at this stage it should nain rural at this stage of the		IS	ΣQ_5 (cfs)	ΣQ_{100} (cfs)	Tributary Area (ac.)	Weighted % Impervious	
velopment. Please revise the			4.4	12.1	3.7	32.62%	
sign accordingly.			1.2	7.5	8.0	57.17%	
1.2	CC-34.4		7.9	14.6	3.4	91.66%	
1.3	CC-34.2, OS-2		6.2	11.0	2.2	100.00%	
2	CC-34-34.4, OS-1-2		26.2	76.6	25.3	30.25%	
4	BS-21.1		8.5	34.3	15.2	11.95%	
5	BS-20.2-20.3		4.7	14.2	4.9	21.21%	
6	BS-20-20.3, 21.1-21.3		57.7	261.3	137.3	8.92%	
7	BS-19, BS-22-22.1, DP6		71.7	318.4	160.7	9.21%	
8	BS-18, 23, DP7		99.8	455.3	231.7	8.69%	
9	BS-23A.1		4.2	17.4	8.0	7.96%	
10	BS-23A, DP8, DP9		108.1	491.7	248.9	8.74%	
11	BS-21		3.0	5.4	0.8	100.00%	
12	BS-28.1, DP11		5.9	17.9	6.5	20.23%	
13	BS-28.2		9.0	41.0	19.5	8.75%	
14	BS-28, BS-28.3, DP12, DP13		29.7	114.0	50.6	12.28%	
15	OS-18, BS-29-30		21.4	93.8	47.5	9.41%	
16	OS-17, BS-27, DP15		36.9	157.3	72.9	9.96%	
17	BS-26, DP14, DP16		68.2	281.8	128.4	10.04%	
18	BS-31		3.2	18.6	8.4	4.57%	
19	BS-32		3.0	15.4	6.3	6.73%	
20	BS-33		5.2	21.9	8.9	10.39%	
21	BS-25		6.1	28.1	12.7	8.49%	


OS-18 13.00 11.00 0.17 0.42 8.2 33.7

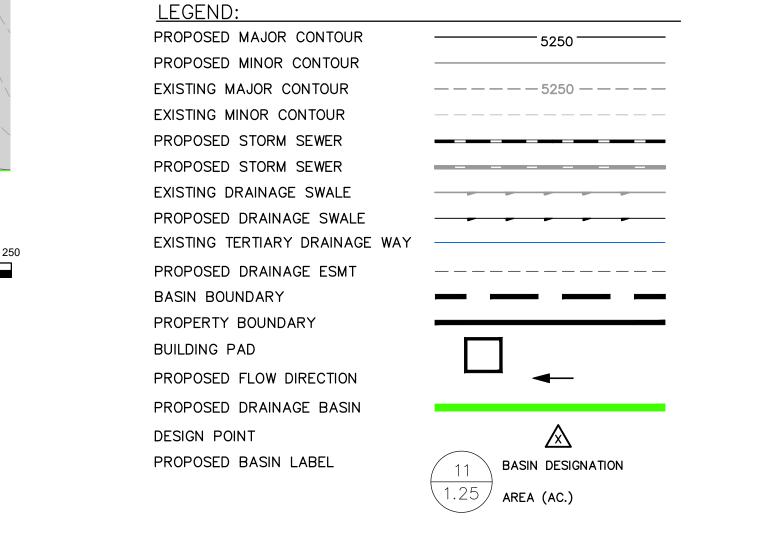

PROPOSED CONDITIONS DRAINAGE MAP

SHEET MAP



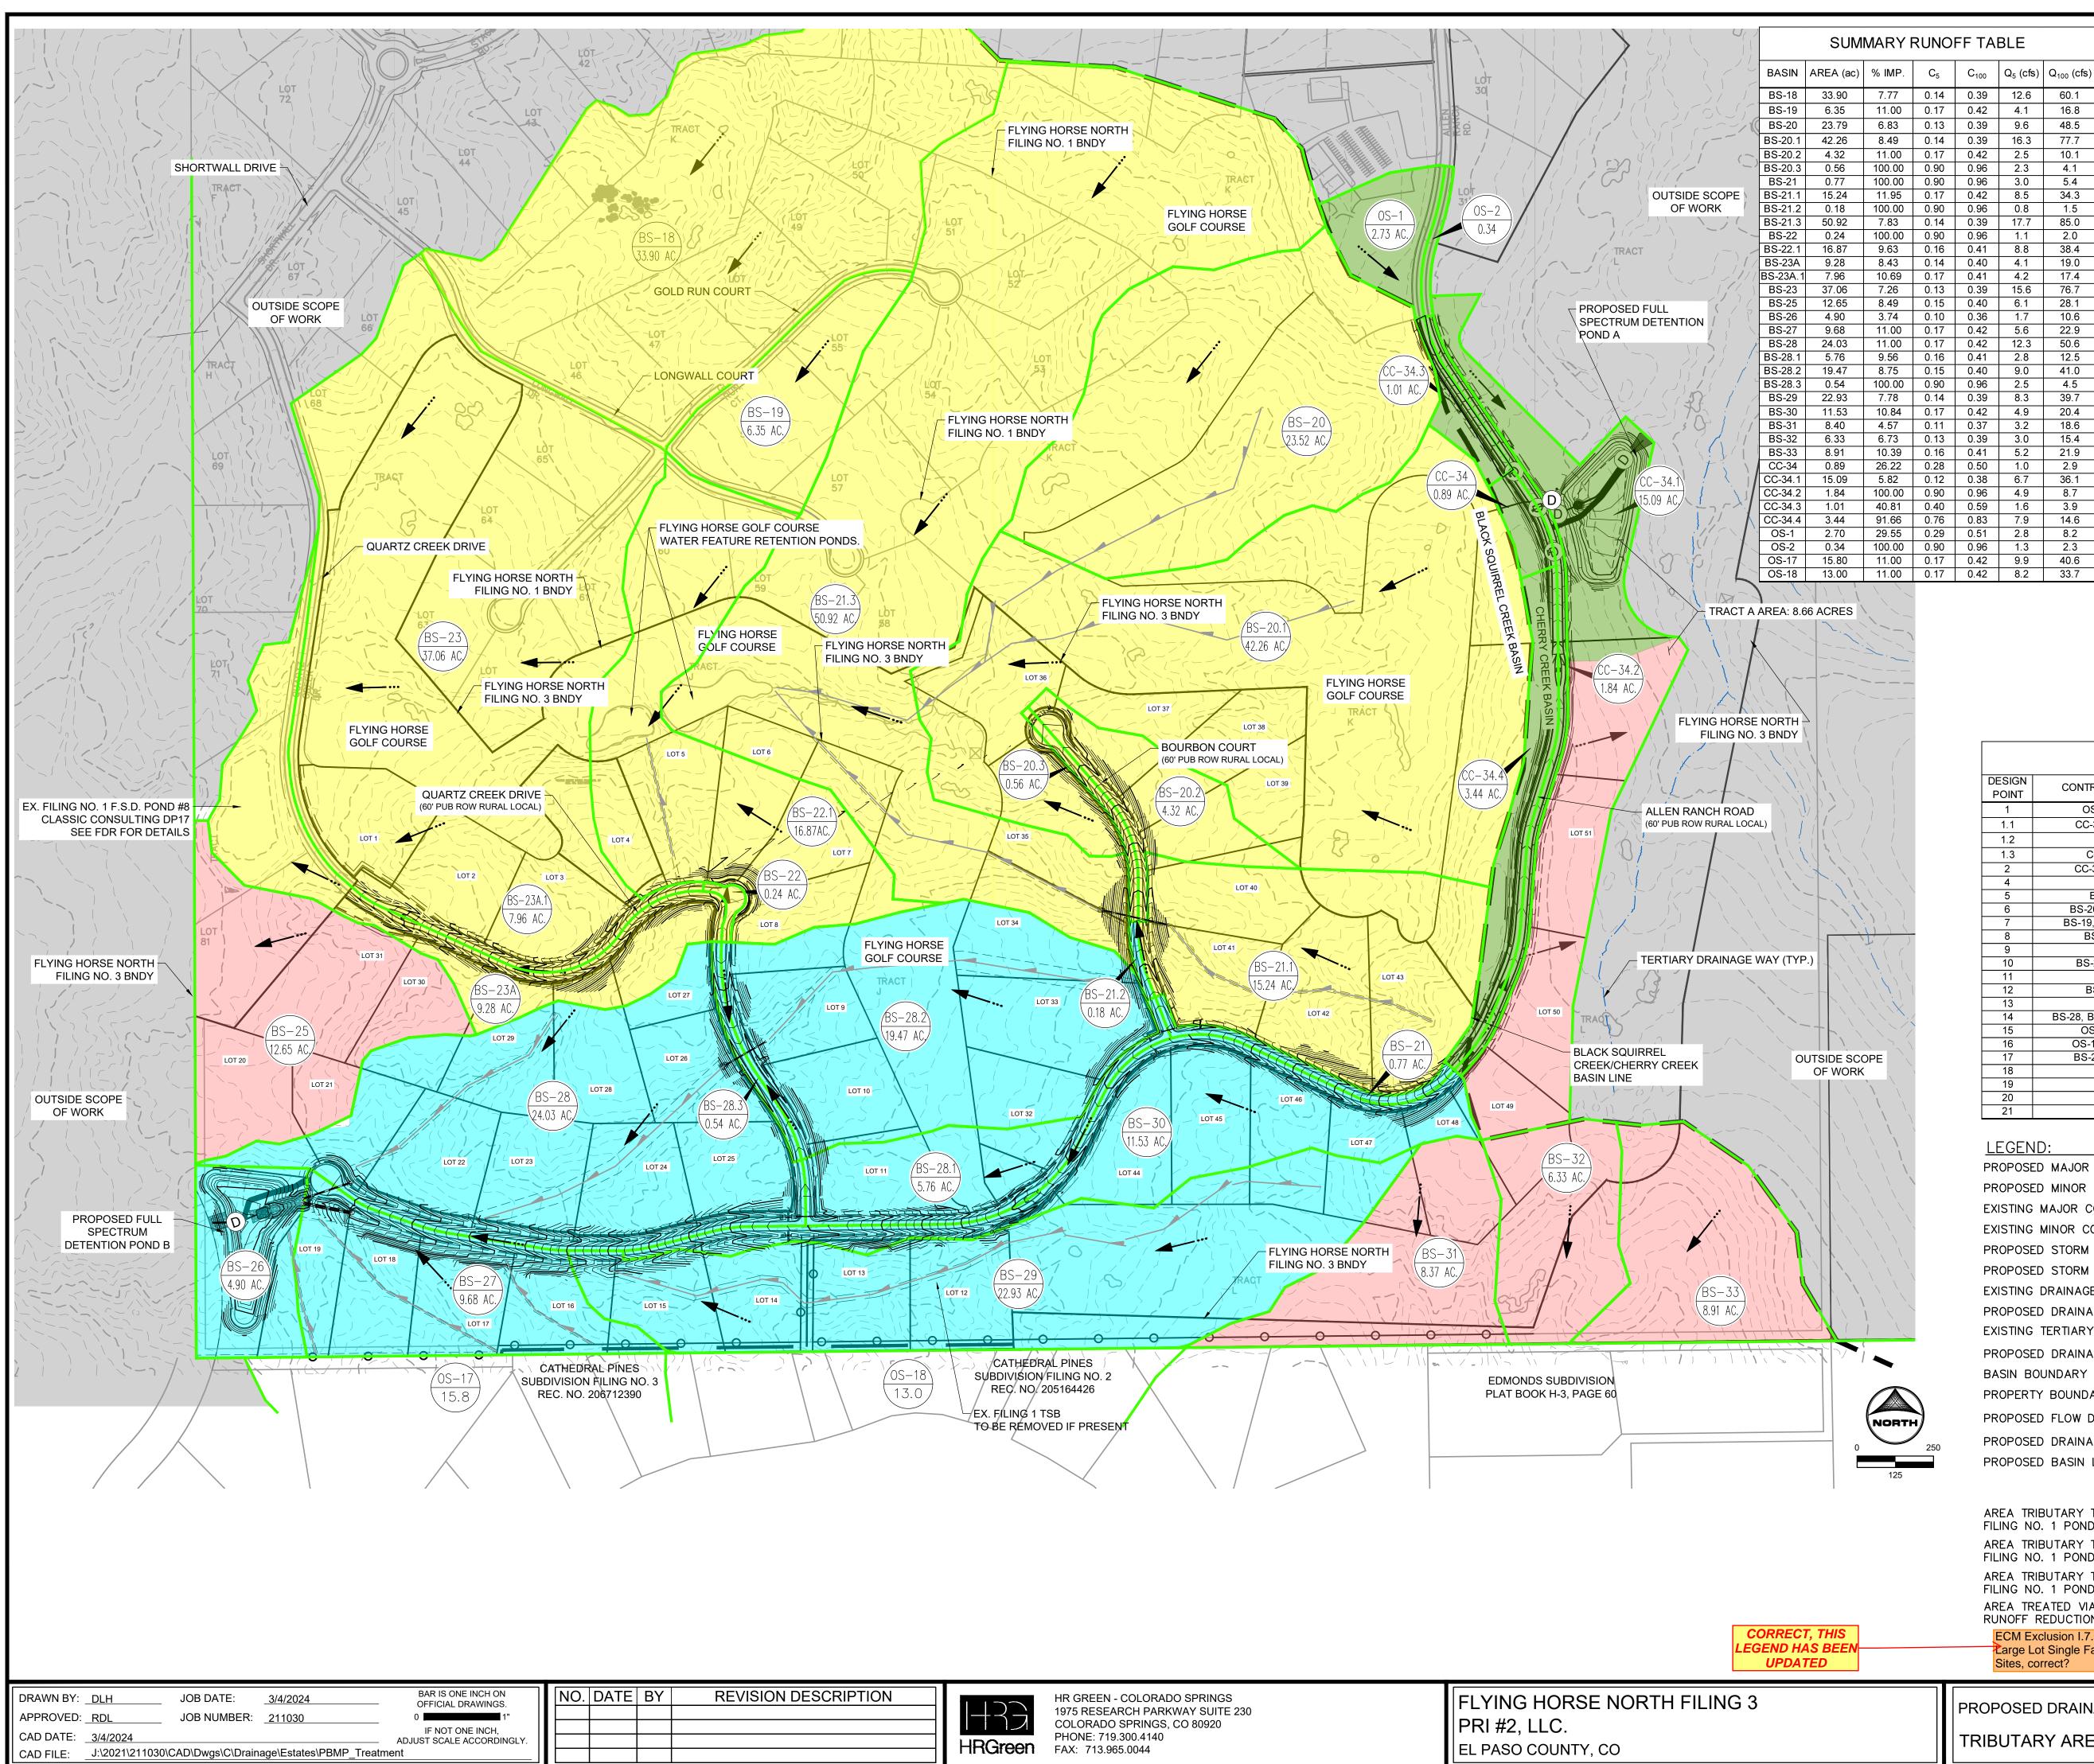

N		HR GREEN - COLORADO SPRINGS	FLYING HORSE NORTH FILING 3
	+ + +	1975 RESEARCH PARKWAY SUITE 230	
		COLORADO SPRINGS, CO 80920 PHONE: 719.300.4140	PRI #2, LLC.
	HRGreen	FAX: 713.965.0044	EL PASO COUNTY, CO
		FAA. 713.903.0044	EL FASO COUNTY, CO

SUMMARY RUNOFF TABLE AREA (ac) % IMP. C5 C100 Q5 (cfs) Q100 (c 33.90 7.77 0.14 0.39 12.6 60.1 6.35 11.00 0.17 0.42 4.1 16.8 23.79 6.83 0.13 0.39 9.6 48.5 42.26 8.49 0.14 0.39 16.3 77.7 4.32 11.00 0.17 0.42 2.5 10.1 0.56 100.00 0.90 0.96 2.3 4.1 0.77 100.00 0.90 0.96 3.0 5.4 15.24 11.95 0.17 0.42 8.5 34.3	
33.90 7.77 0.14 0.39 12.6 60.1 6.35 11.00 0.17 0.42 4.1 16.8 23.79 6.83 0.13 0.39 9.6 48.5 42.26 8.49 0.14 0.39 16.3 77.7 4.32 11.00 0.17 0.42 2.5 10.1 0.56 100.00 0.90 0.96 2.3 4.1 0.77 100.00 0.90 0.96 3.0 5.4 15.24 11.95 0.17 0.42 8.5 34.3	
6.3511.000.170.424.116.823.796.830.130.399.648.542.268.490.140.3916.377.74.3211.000.170.422.510.10.56100.000.900.962.34.10.77100.000.900.963.05.415.2411.950.170.428.534.3	
23.796.830.130.399.648.542.268.490.140.3916.377.74.3211.000.170.422.510.10.56100.000.900.962.34.10.77100.000.900.963.05.415.2411.950.170.428.534.3	3
42.268.490.140.3916.377.74.3211.000.170.422.510.10.56100.000.900.962.34.10.77100.000.900.963.05.415.2411.950.170.428.534.3	
4.3211.000.170.422.510.10.56100.000.900.962.34.10.77100.000.900.963.05.415.2411.950.170.428.534.3	,
0.56 100.00 0.90 0.96 2.3 4.1 0.77 100.00 0.90 0.96 3.0 5.4 15.24 11.95 0.17 0.42 8.5 34.3	
0.77 100.00 0.90 0.96 3.0 5.4 15.24 11.95 0.17 0.42 8.5 34.3	
15.24 11.95 0.17 0.42 8.5 34.3	
	5
0.18 100.00 0.90 0.96 0.8 1.5	
50.92 7.83 0.14 0.39 17.7 85.0)
0.24 100.00 0.90 0.96 1.1 2.0	
16.87 9.63 0.16 0.41 8.8 38.4	•
9.28 8.43 0.14 0.40 4.1 19.0)
7.96 10.69 0.17 0.41 4.2 17.4	
37.06 7.26 0.13 0.39 15.6 76.7	,
12.65 8.49 0.15 0.40 6.1 28.1	
4.90 3.74 0.10 0.36 1.7 10.6	;
9.68 11.00 0.17 0.42 5.6 22.9)
24.03 11.00 0.17 0.42 12.3 50.6	;
5.76 9.56 0.16 0.41 2.8 12.5	,
19.47 8.75 0.15 0.40 9.0 41.0)
0.54 100.00 0.90 0.96 2.5 4.5	
22.93 7.78 0.14 0.39 8.3 39.7	,
11.53 10.84 0.17 0.42 4.9 20.4	
8.40 4.57 0.11 0.37 3.2 18.6	;
6.33 6.73 0.13 0.39 3.0 15.4	•
8.91 10.39 0.16 0.41 5.2 21.9)
0.89 26.22 0.28 0.50 1.0 2.9	
15.09 5.82 0.12 0.38 6.7 36.1	
1.84 100.00 0.90 0.96 4.9 8.7	
1.01 40.81 0.40 0.59 1.6 3.9	
3.44 91.66 0.76 0.83 7.9 14.6	
2.70 29.55 0.29 0.51 2.8 8.2	
0.34 100.00 0.90 0.96 1.3 2.3	
15.80 11.00 0.17 0.42 9.9 40.6	

TRI BUTARY AREA SUMARY TABLE						
BASINID	TOTAL AREA	TOTAL	AREATRIB	AREATRIB	AREATRIB	TOTAL AREA
	(AC)	PROPOSED	TOPONDA	TOPONDB	TOFILING	W/ 100%WC
		DISTURBED	(AC)	(AC)	NO. 1 POND	REDUCTION
		AREA(AC)			8 (AC)	
BS-18	33.90	12.15	-	-	33.9	-
BS-19	6.35	0.00	-	-	6.35	_
BS-20	23.79	11.02	-	-	23.79	-
BS-20.1	42.26	23.35	-	-	42.26	_
BS-20.2	4.32	0.00	-	-	4.32	_
BS-20.3	0.56	0.00	-	-	0.56	-
BS-21	0.77	0.00	-	0.77	-	-
BS-21.1	15.24	1.56	-	-	15.24	-
BS-21.2	0.18	0.00	-	-	0.18	-
BS-21.3	50.92	21.87	-	-	50.92	_
BS-22	0.24	0.00	-	-	0.24	_
BS-22.1	16.87	2.56	-	-	16.87	_
BS-23A	9.28	2.65	-	_	9.28	_
BS-23A.1	7.96	0.27	-	-	7.96	-
BS-23	37.06	15.38	-	-	37.06	-
BS-25	12.65	3.53	-	-	-	12.65
BS-26	4.90	3.95	-	4.9	-	-
BS-27	9.68	0.00	-	9.68	-	_
BS-28	24.03	0.00	-	24.03	-	-
BS-28.1	5.76	0.92	-	5.76	-	-
BS-28.2	19.47	4.87	-	19.47	-	-
BS-28.3	0.54	0.00	-	0.54	-	_
BS-29	22.93	8.20	-	22.93	-	-
BS-30	11.53	0.20	-	11.53	-	-
BS-31	8.40	6.00	-	-	-	8.4
BS-32	6.33	3.00	-	-	-	6.33
BS-33	8.91	0.60	-	-	-	8.91
CC-34	0.89	0.67	0.89	-	-	-
CC-34.1	15.09	8.68	15.09	-	-	-
CC-34.2	1.84	0.00	1.84	-	-	_
CC-34.3	1.01	0.61	1.01	-	-	_
CC-34.4	3.44	0.00	3.44	-	-	-
OS-1	2.70	1.89	2.7	-	-	-
OS-2	0.34	0.00	0.34	-	-	-
OS-17	15.80	0.00	-	15.8	-	-
OS-18	13.00	0.00	-	13	-	_
TOTALS	438.94		25.31	128.41	248.93	36.2

DESIGN POINT SUMMARY TABLE							
DESIGN POINT	CONTRIBUTING BASINS	ΣQ_5 (cfs)	ΣQ_{100} (cfs)	Tributary Area (ac.)	Weighted % Impervious		
1	OS-1 & CC-34.3	4.4	12.1	3.7	32.62%		
1.1	CC-34, DP1, DP1.2	1.2	7.5	8.0	57.17%		
1.2	CC-34.4	7.9	14.6	3.4	91.66%		
1.3	CC-34.2, OS-2	6.2	11.0	2.2	100.00%		
2	CC-34-34.4, OS-1-2	26.2	76.6	25.3	30.25%		
4	BS-21.1	8.5	34.3	15.2	11.95%		
5	BS-20.2-20.3	4.7	14.2	4.9	21.21%		
6	BS-20-20.3, 21.1-21.3	57.7	261.3	137.3	8.92%		
7	BS-19, BS-22-22.1, DP6	71.7	318.4	160.7	9.21%		
8	BS-18, 23, DP7	99.8	455.3	231.7	8.69%		
9	BS-23A.1	4.2	17.4	8.0	7.96%		
10	BS-23A, DP8, DP9	108.1	491.7	248.9	8.74%		
11	BS-21	3.0	5.4	0.8	100.00%		
12	BS-28.1, DP11	5.9	17.9	6.5	20.23%		
13	BS-28.2	9.0	41.0	19.5	8.75%		
14	BS-28, BS-28.3, DP12, DP13	29.7	114.0	50.6	12.28%		
15	OS-18, BS-29-30	21.4	93.8	47.5	9.41%		
16	OS-17, BS-27, DP15	36.9	157.3	72.9	9.96%		
17	BS-26, DP14, DP16	68.2	281.8	128.4	10.04%		
18	BS-31	3.2	18.6	8.4	4.57%		
19	BS-32	3.0	15.4	6.3	6.73%		
20	BS-33	5.2	21.9	8.9	10.39%		
21	BS-25	6.1	28.1	12.7	8.49%		

LEGEND:

PROPOSED MAJOR CONTOUR PROPOSED MINOR CONTOUR EXISTING MAJOR CONTOUR EXISTING MINOR CONTOUR PROPOSED STORM SEWER PROPOSED STORM SEWER EXISTING DRAINAGE SWALE PROPOSED DRAINAGE SWALE EXISTING TERTIARY DRAINAGE WAY PROPOSED DRAINAGE ESMT BASIN BOUNDARY PROPERTY BOUNDARY PROPOSED FLOW DIRECTION PROPOSED DRAINAGE BASIN PROPOSED BASIN LABEL

AREA TRIBUTARY TO FILING NO. 1 POND 8 AREA TRIBUTARY TO FILING NO. 1 POND A AREA TRIBUTARY TO FILING NO. 1 POND B AREA TREATED VIA RUNOFF REDUCTION ECM Exclusion I.7.1.B.5. Parge Lot Single Family

____5250 ____ -----_____ $^{\prime}$ 11 $^{\prime}$ basin designation (1.25) **AREA (AC.)**

5250

Sites, correct? PROPOSED DRAINAGE CONDITIONS

125

250

TRIBUTARY AREAS

SHEET MAP