

**Engineering Review**

05/18/2022 5:13:47 PM

*dsrice*

JeffRice@elpasoco.com

(719) 520-7877

**EPC Planning & Community  
Development Department**

**MASTER DEVELOPMENT DRAINAGE PLAN  
AMENDMENT  
FOR  
STERLING RANCH**

**PCD-ENGINEERING REVIEW COMMENTS  
IN BLUE BOXES WITH BLUE TEXT**

**Prepared For:  
SR Land, LLC  
20 Boulder Crescent, 2<sup>nd</sup> Floor  
Colorado Springs, CO 80903  
(719) 491-3024**

**April 12, 2022  
Project No. 25188.04**

**Prepared By:  
JR Engineering, LLC  
5475 Tech Center Drive  
Colorado Springs, CO 80919  
(303)-267-6240  
Contact: Mike Bramlett, PE**

**ENGINEER'S STATEMENT:**

The attached drainage plan amendment was prepared under my direction and supervision and is correct to the best of my knowledge and belief. Said drainage plan amendment has been prepared according to the criteria established by El Paso County for drainage plans and said report is in conformity with the master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors, or omissions on my part in preparing this report.

\_\_\_\_\_  
Mike Bramlett, Colorado P.E. # 32314  
For and On Behalf of JR Engineering, LLC

\_\_\_\_\_  
Date

**DEVELOPER'S STATEMENT:**

I, the developer, have read and will comply with all of the requirements specified in this drainage report and plan.

Business Name: \_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

Address: \_\_\_\_\_  
\_\_\_\_\_

**El Paso County:**

Filed in accordance with the requirements of the El Paso County Land Development Code, Drainage Criteria Manual, Volumes 1 and 2 and Engineering Criteria Manual, as amended.

\_\_\_\_\_  
Jennifer Irvine, P.E.  
County Engineer/ ECM Administrator

\_\_\_\_\_  
Date

Conditions:





# CONTENTS

---

|  |           |
|--|-----------|
| <b>PURPOSE.....</b>                            | <b>1</b>  |
| <b>GENERAL LOCATION AND DESCRIPTION.....</b>   | <b>1</b>  |
| LOCATION.....                                  | 1         |
| DESCRIPTION OF PROPERTY.....                   | 1         |
| FLOODPLAIN STATEMENT.....                      | 2         |
| <b>DRAINAGE BASINS AND SUBBASINS.....</b>      | <b>2</b>  |
| MAJOR BASIN DESCRIPTIONS.....                  | 2         |
| EXISTING SUB-BASIN DRAINAGE.....               | 3         |
| PROPOSED SUB-BASIN DRAINAGE.....               | 3         |
| <b>DRAINAGE DESIGN CRITERIA.....</b>           | <b>6</b>  |
| DEVELOPMENT CRITERIA REFERENCE.....            | 6         |
| HYDROLOGIC CRITERIA.....                       | 6         |
| <b>HYDROLOGIC RESULTS.....</b>                 | <b>7</b>  |
| GENERAL CONCEPT.....                           | 7         |
| 2018 MDDP COMPARISON TO 2021 DBPS.....         | 7         |
| SWMM COMPARISON TO HEC-HMS.....                | 8         |
| EXISTING CONDITIONS.....                       | 8         |
| PROPOSED CONDITIONS.....                       | 8         |
| <b>DRAINAGE FACILITY DESIGN.....</b>           | <b>12</b> |
| GENERAL CONCEPT.....                           | 12        |
| SPECIFIC DETAILS.....                          | 13        |
| <b>SUMMARY.....</b>                            | <b>15</b> |
| <b>REFERENCES:.....</b>                        | <b>16</b> |
| <b>APPENDICES</b>                              |           |
| A. Figures and Exhibits                        |           |
| B. Existing Conditions Hydrologic Calculations |           |
| C. Proposed Conditions Hydraulic Calculations  |           |
| D. Reference Material                          |           |
| E. Drainage Maps                               |           |



## PURPOSE

---

This document is an amendment to the approved Master Development Drainage Plan (MDDP) for Sterling Ranch. The purpose of this MDDP Amendment report is to:

1. Amend the approved MDDP to account for completed and planned on-site development within Sterling Ranch, including detention from completed filings.
2. Document all differences between the analysis and conclusions reached in the MDDP and this Amendment.
3. Provide analysis and conceptual design information for the on-line Detention Pond at Sterling Ranch Road (PNDW3).
4. This amendment is not intended to address drainage and bridge fees or credits for DBPS improvements. Subsequent submittals will address this.

## GENERAL LOCATION AND DESCRIPTION

---

### Location

Sterling Ranch, known as “the site” from herein, is a parcel of land located in Section 27, 28, 33 and 34, Township 12 South, and Section 4, Township 13 South, Range 65 West of the 6<sup>th</sup> Principal Meridian in El Paso County, Colorado. To the west the site is bound by Vollmer Road. To the north and east, the site is bounded by undeveloped land. To the south, the site is bound by the Pawnee Rancheros and Woodmen Heights developments. A vicinity map is presented in Appendix A.

### Description of Property

Sterling Ranch is 1444 acres and is a Planned Unit Development to be built in multiple phases. The site is currently in various stages of development, with portions already in construction, with others unoccupied and undeveloped. The existing ground cover is sparse vegetation and open space, typical of a Colorado rolling range land condition. In general, the site slopes from north to south and the existing drainageways follow this topography.

Per a NRCS web soil survey of the area, the site is made up of Type A and B soils. Type A soils cover roughly 65% of the site while Type B soils cover the remaining 35% of the site. Group A soils have a high infiltration rate when thoroughly wet. Type B soils have a moderate infiltration when thoroughly wet. Type D soils have a very slow infiltration rate when thoroughly wet and have a high shrink-swell potential. A NRCS soil survey map has been presented in Appendix A.

## Floodplain Statement

Based on the FEMA FIRM Map numbers 08041C0533G and 08041C0535G, dated December 7, 2018, the site lies within Zone AE and Zone X of the Sand Creek floodplain. Zone AE is defined as area subject to inundation by the 1-percent-annual-chance flood event. Zone X is defined as area outside the Special Flood Hazard Area (SFHA) and higher than the elevation of the 0.2-percent-annual-chance (or 500-year) flood. All proposed development within the site will occur in Zone X. The current FIRM Map has been presented in Appendix A.

## DRAINAGE BASINS AND SUBBASINS

---

### Major Basin Descriptions

The site lies within two major drainage basins: the Sand Creek Drainage Basin and the East Fork of Sand Creek Drainage Basin. Both Basins have been previously studied firstly in the 1996 Drainage Basin Planning Study (DBPS) and again in the 2018 Sterling Ranch MDDP by M&S, and finally in the 2021 DBPS by Stantec which has not been adopted by the El Paso County.

The Sand Creek Drainage Basin covers approximately 22 square miles and begins approximately five miles northeast of the Town of Falcon and travels approximately 15 miles to the southeast. The majority of the area within the basin is undeveloped and is characterized as rolling range land typically associated with Colorado's semi-arid climates. Anticipated land use for the basin includes residential, industrial, agricultural and commercial development. Residential developments will range from 0.125 – 5 acre lots with a mix of low, medium and high density developments.

As part of its drainage research, JR Engineering reviewed the following drainage studies and reports:

- Sand Creek Drainage Basin Study prepared by Kiowa in 1996
- Upper Sand Creek Basin Drainage Study prepared by Wilson in 2011
- Sand Creek Drainage Basin Study prepared by Stantec in 2021
- Sterling Ranch Master Development Drainage Plan prepared by M&S in 2018
- Sterling Ranch Filing 1 Final Drainage report prepared by M&S in 2016
- Upper Sand Creek Basin Detention Evaluation Report by Wilson in 2009
- Branding Iron at Sterling Ranch Filing 1 Drainage Report prepared by M&S in 2018
- Branding Iron at Sterling Ranch Filing 2 Drainage Report prepared by M&S in 2020
- Sterling Ranch Phase 3 Preliminary Drainage Report prepared by JR Engineering in 2020
- Sterling Ranch Filing 2 Final Drainage Report prepared by JR Engineering in 2021

- Homestead North at Sterling Ranch Preliminary Drainage Report prepared by JR Engineering in 2021
- Aspen Meadows Final Drainage Report prepared by Matrix Design Group in 2019
- Homestead at Sterling Ranch Filing 1 Final Drainage Report prepared by M&S in 2018
- Homestead at Sterling Ranch Filing 2 Final Drainage Report prepared by M&S in 2020

## Existing Sub-basin Drainage

The existing conditions sub-basins remain unchanged from the 2018 MDDP.

## Proposed Sub-basin Drainage

The proposed basins remain unchanged from the MDDP, except where stated below:

**SC3-6B** is approximately 30.9 acres. It is composed of a portion of the Sterling Ranch Filing 2 Development. The basin is comprised of single-family housing, open space, and a future school site. The basin drains south via curb and gutter and storm sewer to Pond W-5. Flows from Pond W-5 (FSD6) discharge directly into Sand Creek at design point 61.

**SC3-6C** is approximately 62.1 acres. It is composed of a portion of the Sterling Ranch Filing 2 Development. The basin is comprised of single-family housing, open space, and a future school site. The basin drains southwest via curb and gutter and storm sewer to Pond W-5. Flows from Pond W-5 (FSD6) discharge directly into Sand Creek at design point 61.

**SC3-11A** is approximately 7.73 acres. It is composed entirely of the Sand Creek channel adjacent to the Sterling Ranch Filing 2. The basin drains south directly into Sand Creek at design point 63.

**SC3-12** is approximately 54.9 acres. It is composed of a portion of the Sterling Ranch Filing 1 Development. The basin is comprised of single-family housing and open space. The basin drains southwest via future on-site curb and gutter and storm sewer to Pond FSD12. Pond FS12 outfalls directly into Sand Creek upstream of Sterling Ranch Road.

**SC3-12A** is approximately 16.9 acres. It is composed of a portion of the Sterling Ranch Filing 1 Development. The basin is comprised of single-family housing and open space. The basin drains southwest via future on-site curb and gutter and storm sewer to Pond FSD12A. Pond FS12A outfalls directly into Sand Creek upstream of Sterling Ranch Road.

**SC3-13** is approximately 41.0 acres. It is composed of Branding Iron at Sterling Ranch Filings 1 and 2, which is a portion of Sterling Ranch Filing 1. The basin is comprised of single-family housing and open space. The basin drains north to south via curb and gutter and storm sewer to Pond FSD13. Pond FSD13 outfall directly into Sand Creek.

**SC3-14A** is approximately 137.9 acres. It is composed of a portion of the Sterling Ranch Phase 3 Development east of Sand Creek. The basin is comprised of single-family housing and open space. The basin drains southwest via future on-site curb and gutter and storm sewer to Pond FSD14A. Pond FS14A outfalls directly into Sand Creek upstream of Sterling Ranch Road.

**SC3-14B** is approximately 64.0 acres. It is composed of a portion of the Sterling Ranch Phase 3 Development east of the Sterling Ranch Road alignment. The basin is comprised of single-family housing and open space. The basin drains southwest via future on-site curb and gutter and storm sewer to Pond FSD14B. Pond FS14B's flows will be routed through the Phase 3 development and ultimately outfall in Sand Creek.

**SC3-15A** is approximately 128.7 acres. It is currently composed of low density housing and undeveloped land. The basin drains to the south to FSD15B at design point 26. The pond ultimately outfalls in Sand Creek at design point 87.

**SC3-16A** is approximately 178.8 acres. It is composed of a portion of the Sterling Ranch Phase 3 Development. The basin is comprised of single-family housing and open space. The basin drains south via future on-site curb and gutter and storm sewer. During final design, Ponds FSD16A and FSD16B will be consolidated in to a single pond, FSD16. Pond FSD16's flows will be routed through the Phase 3 development, ultimately outfalling in Sand Creek.

**SC3-16B** is approximately 51.5 acres. It is composed of a portion of the Sterling Ranch Phase 3 Development east of the Sterling Ranch Road alignment. The basin is comprised of single-family housing and open space. The basin drains south via future on-site curb and gutter and storm sewer.

**SC3-17B** is approximately 30.3 acres. It is composed of a portion of the Homestead North development. The basin is comprised of single-family housing and open space. The basin drains north to south via curb and gutter and storm sewer into Pond A, previously a part of FSD17 in the MDDP. Flows from Pond A discharge east directly in Sand Creek at design point 71.

**SC3-17A** is approximately 27.8 acres. It is composed of a portion of the Homestead North development. The basin is comprised of single-family housing and open space. The basin drains west to east via curb and gutter and storm sewer into Pond B, previously a part of FSD17 and

FSD18 in the MDDP. Flows from Pond B discharge east directly in Sand Creek at design point 70.

**SC3-18** is approximately 22.7 acres. It is composed of a portion of the Homestead North development. The basin is comprised of single-family housing and open space. The basin drains north to south via curb and gutter and storm sewer into Pond C, previously a part of FSD18 in the MDDP. Flows from Pond C discharge east directly in Sand Creek at design point 69.

**SC3-18B** is approximately 19.4 acres. It is composed entirely of the Sand Creek channel adjacent to the Homestead North development. The basin drains north to south via the Sand Creek channel and outfalls at design point 69.

**SC3-19** is approximately 201.6 acres. It is currently composed of low density housing and undeveloped land. The basin drains to the south where it crosses Vollmer Rd and is conveyed to Homestead North Pond C (FSD18) before ultimately outfalling in Sand Creek at design point 69.

**SC3-20** is approximately 37.1 acres. It is currently undeveloped with any future development required to route drainage through a future pond FSD20 and release at the current rate.

**SC3-22** is approximately 28.9 acres. It is composed of a portion of the Retreat at Timber Ridge Filing 1 development. The basin is comprised of rural (or large lot) single-family housing. The basin is comprised of single-family housing and open space. The basin drains from northwest to southeast via drainage swale, curb and gutter, and storm sewer into the proposed full spectrum detention pond, Pond 1, labeled FSD22 in the MDDP. Flows from Pond 1 discharge east into Sand Creek at design point 71.

**SC3-23** is approximately 28.0 acres. It is composed of a future filing of the Retreat at Timber Ridge development. The basin is comprised of urban density single-family housing. The basin drains from north to southwest via curb and gutter and storm sewer into the proposed full spectrum detention pond, Pond 2, labeled FSD27 in the MDDP. Flows from Pond 2 discharge west into Sand Creek at design point 71.

**SC3-24A** is approximately 36.0 acres. It is comprised of a portion of a future filing of the Retreat at Timber Ridge development and Sand Creek floodplain. The basin drains north to south directly into Sand Creek at design point 73.

**SC3-24B** is approximately 10.6 acres. It is composed of a portion of the Retreat at Timber Ridge Filing 1 development and Sand Creek floodplain. The basin is comprised of single-family housing and open space. The basin drains from northwest to southeast via drainage swale, curb and gutter, and storm sewer directly into Sand Creek at design point 72.

**SC3-27** is approximately 65.0 acres. It is composed of a portion of the Retreat at Timber Ridge Filing 1 development. The basin is comprised of urban density single-family housing. The basin drains from north to southwest via curb and gutter and storm sewer into the proposed full spectrum detention pond, Pond 2, labeled FSD27 in the MDDP. Flows from Pond 2 discharge west into Sand Creek at design point 71.

**SCE-5** is approximately 93.6 acres. It is composed of undeveloped land. The basin drains to the east to FSDE3 before being conveyed to Pond E7 then discharging into the East Fork of Sand Creek.

**SCE-7** is approximately 27.3 acres. It is composed of undeveloped land. The basin drains to the east to FSDE4 before being conveyed to Pond E7 then discharging into the East Fork of Sand Creek.

**SCE-10** is approximately 164.4 acres. It is composed of undeveloped land. The basin drains to the east to FSDE6 before being conveyed to Pond E7 then discharging into the East Fork of Sand Creek.

## DRAINAGE DESIGN CRITERIA

---

### Development Criteria Reference

Storm drainage analysis and design criteria for the project were taken from the “*City of Colorado Spring/El Paso County Drainage Criteria Manual*” Volumes 1 and 2 (EPCDCM), dated October 12, 1994, the “*Urban Storm Drainage Criteria Manual*” Volumes 1 - 3 (USDCM) and Chapter 6 and Section 3.2.1 of Chapter 13 of the “*Colorado Springs Drainage Criteria Manual (CCSDCM)*”, dated May 2014, as adopted by El Paso County, as well as the July 2019 El Paso County Engineering Criteria Manual update.

### Hydrologic Criteria

Previously, the MDDP used HEC-HMS to model hydrologic conditions. With all of the on- and off-line detention present along Sand Creek, it was decided that CUHP-SWMM would be a more appropriate way to model the hydrologic conditions. All hydrologic data was obtained from NOAA Atlas 2 isopluvial maps found in the EPCDCM. Runoff was calculated using CUHP Version 2.0.0, developed by Urban Drainage and Flood Control District. The model utilizes the raingauge classified as “a 24-Hr Type II Storm” to simulate a long duration front storm common

to the area, which is the same rain gauge used in the original MDDP. The following rainfall depths were utilized in the model: 2.1 inches for the 2 year storm, 2.5 inches for the 5 year storm, 3.0 inches for the 10 year storm, 3.6 inches for the 25 year storm, 4.1 inches for the 50 year storm, and 4.6 inches for the 100 year storm, which are the same point precipitation values used in the original MDDP. Using Table 5.2 from the EPCDCM, a distribution curve was created for each of the design storms to be used in CUHP. EPA SWMM 5.1 was utilized to route runoff flow rates for the sizing of stormwater storage facilities. The CUHP calculations and SWMM model are presented in Appendices B and C.

Urban Drainage and Flood Control District's UD-Detention, Version 3.07 workbook was used for in the original MDDP for preliminary pond sizing. Various other versions of UD-Detention were used in the different filings for final design of the full spectrum detention ponds. Required detention volumes and allowable release rates were designed per USDCM and CCS/EPCDCM. Pond sizing spreadsheets from the original MDDP and approved drainage reports are presented in Appendix D.

## HYDROLOGIC RESULTS

---

### General Concept

The general procedure for this MDDP Amendment is as follows. First the hydrology was evaluated to determine the most accurate way to model it using either SWMM internal hydrology or CUHP compared to the original HEC-HMS model. Next, the existing conditions were re-evaluated to determine the new baseline hydrology which would then determine the amount of detention required in Pond W-3 at Sterling Ranch Road. The third model was the proposed conditions model that updates the basins and various on-site ponds in the adjacent developments, as well as includes the preliminary design of the proposed Pond W-3 with the goal of reducing flows downstream to below historic levels

### 2018 MDDP Comparison to 2021 City DBPS

Comparing the 2018 MDDP hydrology with the City DBPS hydrology the main difference between the two is imperviousness. The City DBPS shows imperviousness values with the current undeveloped conditions of basins, regardless of future development plans. The adopted 1996 DBPS assumed low density development in this area. The 2018 MDDP accounts for future development within Sterling Ranch, as well as upstream and offsite basins that are still tributary to Sand Creek. With the intent of accounting for all possible future flows, as to avoid having to possibly improve the channel again in the future, it was decided that the 2018 MDDP hydrology would be what was used for the baseline of this study, rather than the City DBPS hydrology.



## CUHP-SWMM Comparison to HEC-HMS

The first hydrologic analysis done was to verify the validity of using CUHP-SWMM instead of the previously used HEC-HMS. A technical memo summarizing the results of this analysis can be found in **Appendix B**.

## Existing Conditions

The second model was a re-evaluation of the existing conditions along Sand Creek. Basic basin parameters (area, imperviousness, slope, routing parameters) were taken from the MDDP HEC-HMS model to create a model as close the previous one as possible, with the only difference being the software used to model the hydrology. With no detention present in the existing conditions model, the CUHP-SWMM model was able to produce numbers that were an average of 15% different from the HEC-RAS model, despite being functionally different in how they calculate runoff. The most critical values obtained from the model are at design points 63, 60A, and 53A, which are along Sand Creek downstream of the project. DP63, located at Sterling Ranch Road, saw an increase in flows from 1911.5 cfs to 1980.7 cfs compared to the previous model. DP60A, located along Sand Creek adjacent to the Aspen Meadows subdivision saw flows increase from 1913.5 cfs to 1969.2 cfs. DP53A, located along Sand Creek at Detention Basin #3 saw flows increase from 2061.5 cfs to 2197.7 cfs. Tables summarizing the comparison between the CUHP-SWMM model and the HEC-HMS model can be found in **Appendix B**.

## Proposed Conditions

One of the purposes of this MDDP Amendment is to account for completed and planned development. The third model was a re-evaluation of the proposed conditions along Sand Creek. The model was built using basic basin parameters (area, imperviousness, slope, routing parameters) taken from the MDDP for the basins that remain unchanged from the MDDP. For the rest of the basins, updates were made based on either preliminary or final designs taken from various Approved Drainage Reports. After re-evaluating the existing and proposed conditions of Sterling Ranch, it was determined that an on-line detention pond upstream of Sterling Ranch Road was still necessary in order to attenuate proposed flowrates below existing conditions flow rates. The following is a list of all the updates from the previous Proposed Conditions model:

- Pond W-3 has been updated based on preliminary designs proposed with this MDDP Amendment.

- The existing stock pond located approximately 600 feet upstream of Sterling Ranch Road has been included in the model. Previously, the pond was excluded from the MDDP model since the thalweg of the channel did not go through the pond. Based on preliminary designs with this MDDP Amendment, the pond will remain in place, but flows will instead pass directly through it and outfall downstream via outlet structure.
- The larger stock pond located north of Briargate Parkway has been included in the model. Previously, the pond was excluded from the model since the thalweg of the channel did not go through the pond. Based on preliminary designs with this MDDP Amendment, the pond will remain in place, but flows will instead pass directly through it and outfall downstream via outlet structure. The smaller stock pond in this area is being removed from the channel, and thus will not need to be included in the model.
- With Sterling Ranch Phase 3 progressing to preliminary design, a 17.23 acre portion of Sub-Basin SCE-7 and a 11.06 acre portion of SCE-10 has been shifted to basin SC3-14B based on the proposed storm layout.
- As part of Sterling Ranch Phase 3, Pond 11A proved to be unnecessary as hypothesized in the MDDP. Pond 11A was proposed to be located on the east side of the development and drain to the east in directly into Sand Creek. Sub-Basin 11A now drains to Pond FSD6.
- Sub-Basin SC3-7 still drains to FSD6 based on Pond W5 sizing. JR Engineering is currently coordinating with Matrix about the future routing of the flows from the Barbarick detention pond and rain garden through Sterling Ranch Phase 3, but for the purposes of this MDDP Amendment, flows from Sub-Basin SC3-7 have been accounted for in the design of Pond W-5 in Sterling Ranch Filing 2.
- Sub-Basin SC3-19 was previously proposed to release undetained into Sand Creek via outfall channel. The basin is now proposed to be routed through Pond FSD18 in the Homestead North development.
- The previous MDDP showed a discrepancy between the map and model for Basin SC3-15A. The approved map showed the basin being routed around Pond FSD15B and outfalling undetained in Sand Creek, while the approved model showed the basin being routed through FSD15B. The pond does not appear to be sized to handle the additional flows from SC3-15A, but for continuity the Amendment SWMM model has flows from basin SC3-15A routing through Pond FSD15B.

This should address how the flows are handled with the current approved plans and construction.

- Ponds 16A and 16B will be consolidated during final design for Sterling Ranch Phase 3. Since they haven't been designed yet, they will remain as shown in the MDDP since the areas haven't changed drastically. Sub-Basin SC3-16B's area has been modified slightly to account for the Sterling Ranch Phase 3 preliminary layout. The proposed Pond 16 will have the same release rate as Ponds 16A and 16B combined.
- Sterling Ranch Phase 3 is still in a preliminary design phase so Pond 14A and Pond 11B haven't had outlets designed yet. In order to update the storage and outfall curves, the preliminary pond grading was used along with the UD-Detention spreadsheet to generate a preliminary full spectrum ratings curve. Both the grading and outlet structure are subject to change during final design, but will maintain a discharge that is less than predevelopment flows.
- Pond FSD12 has been designed as Pond 4 from Sterling Ranch Filing 1 by M&S dated 7/16. The pond was modeled using the storage and outfall curves from the 2018 MDDP.
- Pond FSD12A has been added to the model, which is Pond 1 from Homestead Filing 2 by M&S, dated 7/18. The sub-basin hydrologic values for Sub-Basin SC3-12A were taken from the Homestead Filing 2 Final Drainage Report's UD-Detention spreadsheet, while the pond was also modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves. The previous MDDP considered this pond to be temporary, but it is now permanent.
- Pond FSD13 has been designed as Pond 8 from Sterling Ranch Filing 1 by M&S dated 7/16 and modified for the Branding Iron Filing 2 development by M&S dated 1/20. The pond was modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves from the Branding Iron at Sterling Ranch Filing 2 Final Drainage Report.
- Pond FSD18 has been designed as Pond A from Homestead North by JR Engineering. The sub-basin hydrologic values for Sub-Basin SC3-18 were taken from the UD-Detention spreadsheet, while the pond was also modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves from the Homestead North Final Drainage Report.
- Pond FSD17A has been designed as Pond B from Homestead North by JR Engineering. The sub-basin hydrologic values for Sub-Basin SC3-17A were taken from the UD-Detention spreadsheet, while the pond was also modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves from the Homestead North Final Drainage Report.

- Pond FSD17B has been designed as Pond C from Homestead North by JR Engineering. The sub-basin hydrologic values for Sub-Basin SC3-17B were taken from the UD-Detention spreadsheet, while the pond was also modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves from the Homestead North Final Drainage Report.
- Sub-Basin SC318B was added to account for the runoff outside of the development, in the channel area from Sub-Basins SC3-17 and SC3-18 that were unaccounted for in the Homestead North detention ponds.
- Pond FSD22 has been designed as Pond 1 from Retreat at Timber Ridge Filing 1 by Classic Engineering. The sub-basin hydrologic values for Sub-Basin SC3-22 were taken from the UD-Detention spreadsheet, while the pond was also modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves from the Retreat at Timber Ridge Filing 1 Final Drainage Report.
- Pond FSD27 has been designed as Pond 2 from Retreat at Timber Ridge Filing 1 by Classic Engineering. The sub-basin hydrologic values for Sub-Basin SC3-27 were taken from the UD-Detention spreadsheet, while the pond was also modeled using the UD-Detention spreadsheet's stage-area and stage-discharge curves from the Retreat at Timber Ridge Filing 1 Final Drainage Report.
- Pond FSD21 now outfalls directly into DP-73 instead of going through Pond FSD27. Based on the Drainage Report for The Retreat at Timber Ridge, flows from Sub-Basin SC3-21 drain to a future full spectrum detention pond that outfalls directly into Sand Creek.

A table summarizing the changes in the Full Spectrum Detention Pond's sizing and release rates can be found in **Appendix C**.

The second stated purpose of this MDDP Amendment is to document the differences between the MDDP and this MDDP Amendment. Comparing the MDDP Amendment's proposed conditions model to the MDDP, the median difference in Sub-basin peak flow rates between the two is a 6% decrease in the basin runoff. With the basin parameters carried over as much as possible, some of the differences is due to how the hydrographs were generated in HEC-HMS and SWMM respectively. The MDDP used curve number while the MDDP Amendment used CUHP. The MDDP Amendment also took into account changes basin parameters based on the various accepted Final Drainage Reports. The differences in Sub-basin peak flow rates were not universally higher in CUHP-SWMM, with there being a range from 100% higher to 100% lower. A table comparing the peak flow rates of the Sub-basins can be found in **Appendix C**.

The comparison between the routed hydrographs at the design points of the MDDP Amendment proposed conditions model and MDDP proposed conditions model shows a more consistent change. Peak runoff rates along the main fork are mostly a few percent higher, with a handful further downstream the reach 14 to 16% higher. The East Fork saw a reduction of peak runoff rates around 60% from the previous model. The total volume of water is consistently 10 to 25% lower than the previous model with a exception of a few places. This is due in part to the changes in detention release rates as well as the previously mentioned differences in how the hydrographs were created. The differences between the two models of when peak runoff occurs were typically within 10 to 15 minutes in each basin and at each node. Tables comparing the MDDP Amendment proposed conditions model with the previous one from the MDDP can be found in **Appendix C**.

The last and most crucial comparison is between the updated existing conditions model and the updated proposed conditions model. As seen in Table 1, all of the online and offline detention shows a clear reduction in flows along Sand Creek. The total volume of runoff is very similar in the undeveloped upper portion of the reach at Design Points 74, 75, and 78. As runoff accumulates downstream at Design Points 73, 71, 69, and 63 the volume of runoff drastically increases due to the increased imperviousness of the adjacent developments, but the peak flow rates remain lower than existing due to all of the full spectrum detention ponds along the reach. As seen in Table 1, Pond W-3 reduces peak flow rates downstream of it at Design Points 60A and 53A to below the pre-development rates seen in the updated existing conditions model. Flows have been reduced from 1969.2 and 2197.2 cfs, respectively, to 1889.4 and 1895.2 cfs. A table comparing the peak runoff rates and the total volume of runoff at the design points can be found in **Appendix C**.


## DRAINAGE FACILITY DESIGN

---

### General Concept

The third stated purpose of this MDDP Amendment is an evaluation of the required volume for on-line detention at Sterling Ranch Road (Pond W-3). Along with an on-line detention pond, new culverts are proposed at Sterling Ranch Road and Briargate Parkway being designed by others. The amendment also includes revisions to the existing stock pond north of Sterling Ranch Road, the stock ponds north of Briargate Parkway, and improvements to Sand Creek channel.

verify values



### Specific Details

Compared to the previous preliminary design of Pond W-3, the amount of storage volume has decreased from 78.2 ac-ft. to 50.6 ac-ft. In order to avoid classification as a jurisdictional dam, the maximum ponding depth is 10 feet. The peak release rate has been increased from 1350.6 cfs to 1552.5 cfs. Despite the increase in release rate, peak flow rates along Sand Creek downstream of the pond are lower than existing. The previous MDDP model outfalls at DP 53A, which is defined as the Full Spectrum Pond at Woodmen Drive, and so does the MDDP Amendment SWMM model. The MDDP model over-detains at Pond W-3 in order to reduce flows downstream well below those in the existing conditions. With the goal being to simply reduce flows to less than predevelopment rates, this amount of detention is unnecessary, hence the reduced storage volume and the increased release rate. A complete comparison between existing and proposed conditions of design flows along Sand Creek can be seen below.

Staff has forwarded to the City for concurrence. What would the difference be without the diversion? A footnote about what Classic is planning should be added.

**Table 1.**

| Design Point Comparison Summary |                 |                    |                 |                      |                             |                           |
|---------------------------------|-----------------|--------------------|-----------------|----------------------|-----------------------------|---------------------------|
| Location                        | Design Point ID | Existing (Updated) | Proposed (MDDP) | Proposed (Amendment) | % Difference Amend vs. MDDP | % Difference Amend vs. EX |
|                                 |                 | Q100 (cfs)         |                 |                      |                             |                           |
|                                 | DP-74           | 352.3              | 262.8           | 293.76               | 12%                         | -17%                      |
|                                 | DP-75           | 970.5              | 950.5           | 887.87               | -7%                         | -9%                       |
|                                 | DP-78           | 497.7              | 385.3           | 422.09               | 10%                         | -15%                      |
|                                 | DP-73           | 1672               | 1506.7          | 1497.12              | -1%                         | -10%                      |
| Sterling Ranch N BNDY           | DP-71           | 1734.9             | 1612.2          | 1642.96              | 2%                          | -5%                       |
| Briargate Pkwy X'ing            | DP-69           | 1988.4             | 1775.7          | 1795.11              | 1%                          | -10%                      |
| Sterling Ranch S BNDY           | DP-63           | 1980.7             | 1385.1          | 1554.72              | 12%                         | -22%                      |
| Marksheffel X'ing               | DP-60A          | 1969.2             | 1661.8          | 1839.17              | 11%                         | -7%                       |
| Sand Creek and Pond 3           | DP-53A          | 2197.7             | 1668.9          | 1843.8               | 10%                         | -16%                      |
| Near SE Prop Corner             | DP-56           | 242.9              | 196.4           | 145.69               | -26%                        | -40%                      |

Conceptually, the current preliminary design for Pond W-3 is similar to what was previously shown in the MDDP. Ponding will occur adjacent to Sterling Ranch Road and pass through an outlet structure before entering the roadway culvert and continuing downstream. The Sterling Ranch Road culvert is currently proposed to be a Conspan arch, O-535 shape (by others).

The existing stock pond upstream of Sterling Ranch Road will remain in place, with flows passing through the pond and leaving through an outlet structure. The major change in how the

pond functions is the new design does not have a diversion structure along Sand Creek that routes flows around the existing pond. Due the narrow space between the proposed development and the existing stock pond, this portion of channel would require extensive reinforcement due to high shears and velocities. In order to maintain the water right for the pond, an outlet orifice structure will maintain a static water surface of 7038 ft and all flows above that elevation will pass undetained through the orifice structure and outfall into Pond W-3. Adding the existing stock pond as online storage directly upstream of Pond W-3 made a drastic difference in peak flows. The time of peak concentration at Sterling Ranch Road was only about 20 minutes different, but the additional storage volume attributed to the stock ponds reduced peak flows by 160 cfs and reduced the maximum volume of water by 1.3 ac-ft.

The proposed channel improvements begin just north of the Sterling Ranch southern property boundary and run north roughly two miles to the northern property boundary. The channel will include a 17 feet wide, 0.71 feet deep, meandering bankfull channel along with a 1% flood terrace along the east side that ranges from 80 feet to 120 feet wide. The straight sections of channel will be rock riffles, while the curves will be eddy pools. The new bankfull will be set lower than the existing channel to establish a new thalweg. Along the west side the bankfull channel will grade up to tie into the existing thalweg in order to preserve as many of the existing wetlands as possible. The channel has been broken up into three separate sections; Reach 1 is the portion between the southern boundary and Sterling Ranch Road, Reach 2 is the portion between Sterling Ranch Road and Briargate Parkway, and Reach 3 is the portion from Briargate Parkway to the northern boundary. A 15' maintenance trail will run the length of the channel on both sides of it, sitting several feet above the 100 year water surface, while access points from the proposed adjacent developments will be provided.

Reach 1 of the channel is approximately 900 feet long. Upstream, it ties in directly to the downstream grading of the proposed Conspan Arch, Type O-535 (designed by others) culvert at Sterling Ranch Road. The culvert was designed to pass the full 100-year FIS flow rate of 2600 cfs while still providing 1 foot of freeboard within the culvert. In the amended MDDP hydrology, the peak 100-year release from Pond W-3 is 1580 cfs. There are 7 riffle sections, all with a slope of 0.50%, while the slope through the eddy pools is flat. There are two grouted boulder drops structures along this reach, one approximately 3 feet tall and the other approximately 4 feet tall. Due to the development on both sides of the channel, the flood terrace is at its narrowest width of 50 feet along this section. As the channel moves downstream it eventually widens to a maximum flood terrace width of approximately 240 feet, before tying into the existing channel upstream of the property boundary.

Reach 2 of the channel is approximately 5,030 feet long. Upstream, it ties in directly to the downstream grading of the proposed Conspan Arch, Type C42T (designed by others) culvert at Briargate Parkway. The culvert was designed to pass the full 100-year FIS flow rate of 2600 cfs

while still providing 1 foot of freeboard within the culvert. In the amended MDDP hydrology, the peak 100-year flow at DP 69, located at Briargate Parkway, is 1827 cfs. There are 32 riffle sections with slopes ranging from 1.11% to 5.00%, while the slope through the eddy pools is flat, except for 2 with slopes less than 1.5%. There are two grouted boulder drops structures along this reach, one approximately 3.5 feet tall and the other approximately 4.5 feet tall. The flood terrace varies in width along this reach from approximately 160 feet up to 330 feet wide. The channel ends at the existing stock pond upstream of Sterling Ranch Road. Flows will accumulate in the stock pond until they reach the static water surface and then overtop the orifice structure and then outfall directly into Pond W-3. With development currently happening on both sides of the channel, especially on the west side, retaining walls are used extensively to grade in the maintenance trail along this reach.

1,643?

Reach 3 of the channel is approximately 2,807 feet long. In the amended MDDP hydrology, the peak 100-year flow at DP 71, located at the northern boundary of Sterling Ranch, is 1,627 cfs. There are 20 riffle sections with slopes ranging from 1.11% to 5.00%, while the slope through the eddy pools is flat, except for 2 with slopes less than 1.5%. There is one grouted boulder drops structure along this reach, approximately 6 feet tall. The flood terrace varies in width along this reach from approximately 180 feet up to 260 feet wide. The larger of the two existing stock ponds on this reach will remain in place, approximately 900 feet upstream of the Briargate Parkway culvert. It will function similarly to the one just north of Sterling Ranch Road. Flows will enter the pond directly, and an orifice structure will maintain a static water surface in the pond. During larger events, flows will overtop the orifice structure and outfall downstream of the pond. A second stretch of channel approximately 550 feet long connects the pond outfall with the proposed drop structure associated with the Conspan Arch, Type C42T (designed by others) culvert at Briargate Parkway.

Address bank stabilization along the west side of the channel in the Homestead North development (from the Wheatland Drive cul-de-sac to Poco Road) and along Filing 3 at the south end.

## SUMMARY

---

The proposed development remains consistent with pre-development drainage conditions with the construction of the recommended drainage improvements, including ditches, culverts, detention ponds and drainage channel improvements. The proposed development will not adversely affect the offsite major drainageways or surrounding development. This report meets the latest El Paso County Drainage Criteria requirements for this site.




## REFERENCES:

---

1. City of Colorado Springs Drainage Criteria Manual Volume 1, City of Colorado Springs, CO, May 2014.
2. Final Drainage Report for Aspen Meadows, Matrix Design Group, January 2019.
3. Final Drainage Report for Branding Iron at Sterling Ranch Filing No. 2, M&S Civil Consultants, January 2020.
4. Final Drainage Report for Homestead at Sterling Ranch Filing No. 1, M&S Civil Consultants, July 2018.
5. Final Drainage Report for Homestead at Sterling Ranch Filing No. 2, M&S Civil Consultants, January 2020.
6. Final Drainage Report for Retreat at Timberridge Filing No. 1, Classic Consulting, June 2019.
7. Master Development Drainage Plan for Sterling Ranch, M&S Civil Consultants, October 2018.
8. Master Development Drainage Plan for Sterling Ranch Filing Nos. 1&2 and Final Drainage Report for Sterling Ranch Filing No. 1, M&S Civil Consultants, December 2017.
9. Preliminary Drainage Report and MDDP Addendum for Homestead North at Sterling Ranch Preliminary Plan, JR Engineering, February 2021.
10. Preliminary Drainage Report for Sterling Ranch Phase 3 Preliminary Plan, JR Engineering, December 2020.
11. Sand Creek Drainage Basin Planning Study, Kiowa, March 1996. (Adopted by El Paso County)
12. Sand Creek Drainage Basin Planning Study, Stantec, January 2021. (Not Adopted by El Paso County)
13. Sterling Ranch Filing 2 Final Drainage Report, JR Engineering, June 2021.
14. Urban Storm Drainage Criteria Manual, Urban Drainage and Flood Control District, Latest Revision.

**APPENDIX A**

**FIGURES AND EXHIBITS**

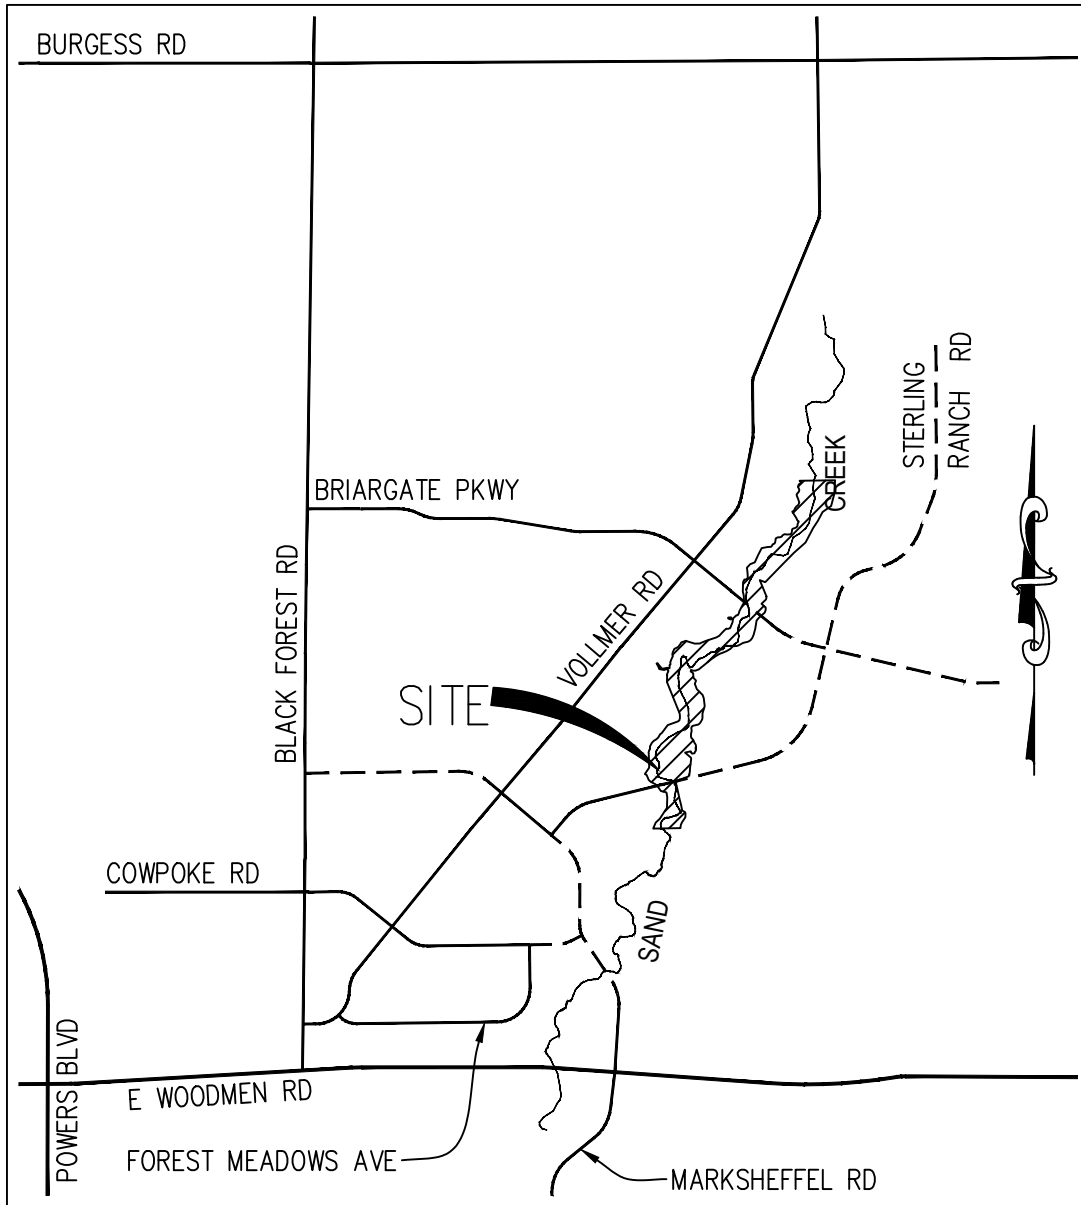

# KEY MAP

N.T.S.

VICINITY MAP  
 STERLING RANCH  
 JOB NO. 25188.03  
 10/21/2021  
 SHEET 1 OF 1



**J·R ENGINEERING**

A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • [www.jrengineering.com](http://www.jrengineering.com)

**NOTES TO USERS**

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

**Coastal Base Flood Elevations** shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services  
NOAA, NIMS12  
National Geodetic Survey  
SSMC-3, #9202  
1315 East-West Highway  
Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

**Base Map** information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, and Anderson Consulting Engineers, Inc. These data are current as of 2008.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

**Corporate limits** shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.

Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FIRM) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at <http://www.msc.fema.gov/>.


If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call **1-877-FEMA MAP (1-877-336-2627)** or visit the FEMA website at <http://www.fema.gov/business/nfp>.

**El Paso County Vertical Datum Offset Table**

| Flooding Source | Vertical Datum Offset (ft) |
|-----------------|----------------------------|
|                 |                            |

REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION


**Panel Location Map**

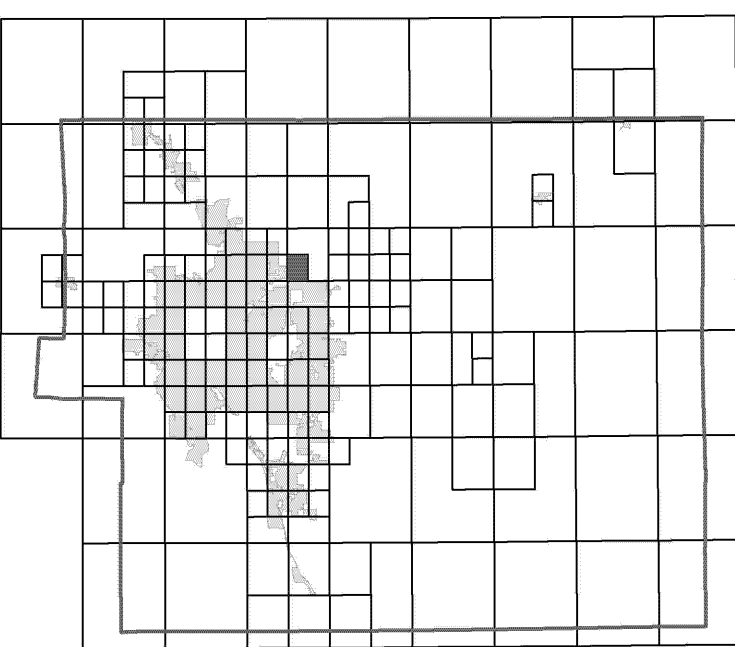

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).



Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

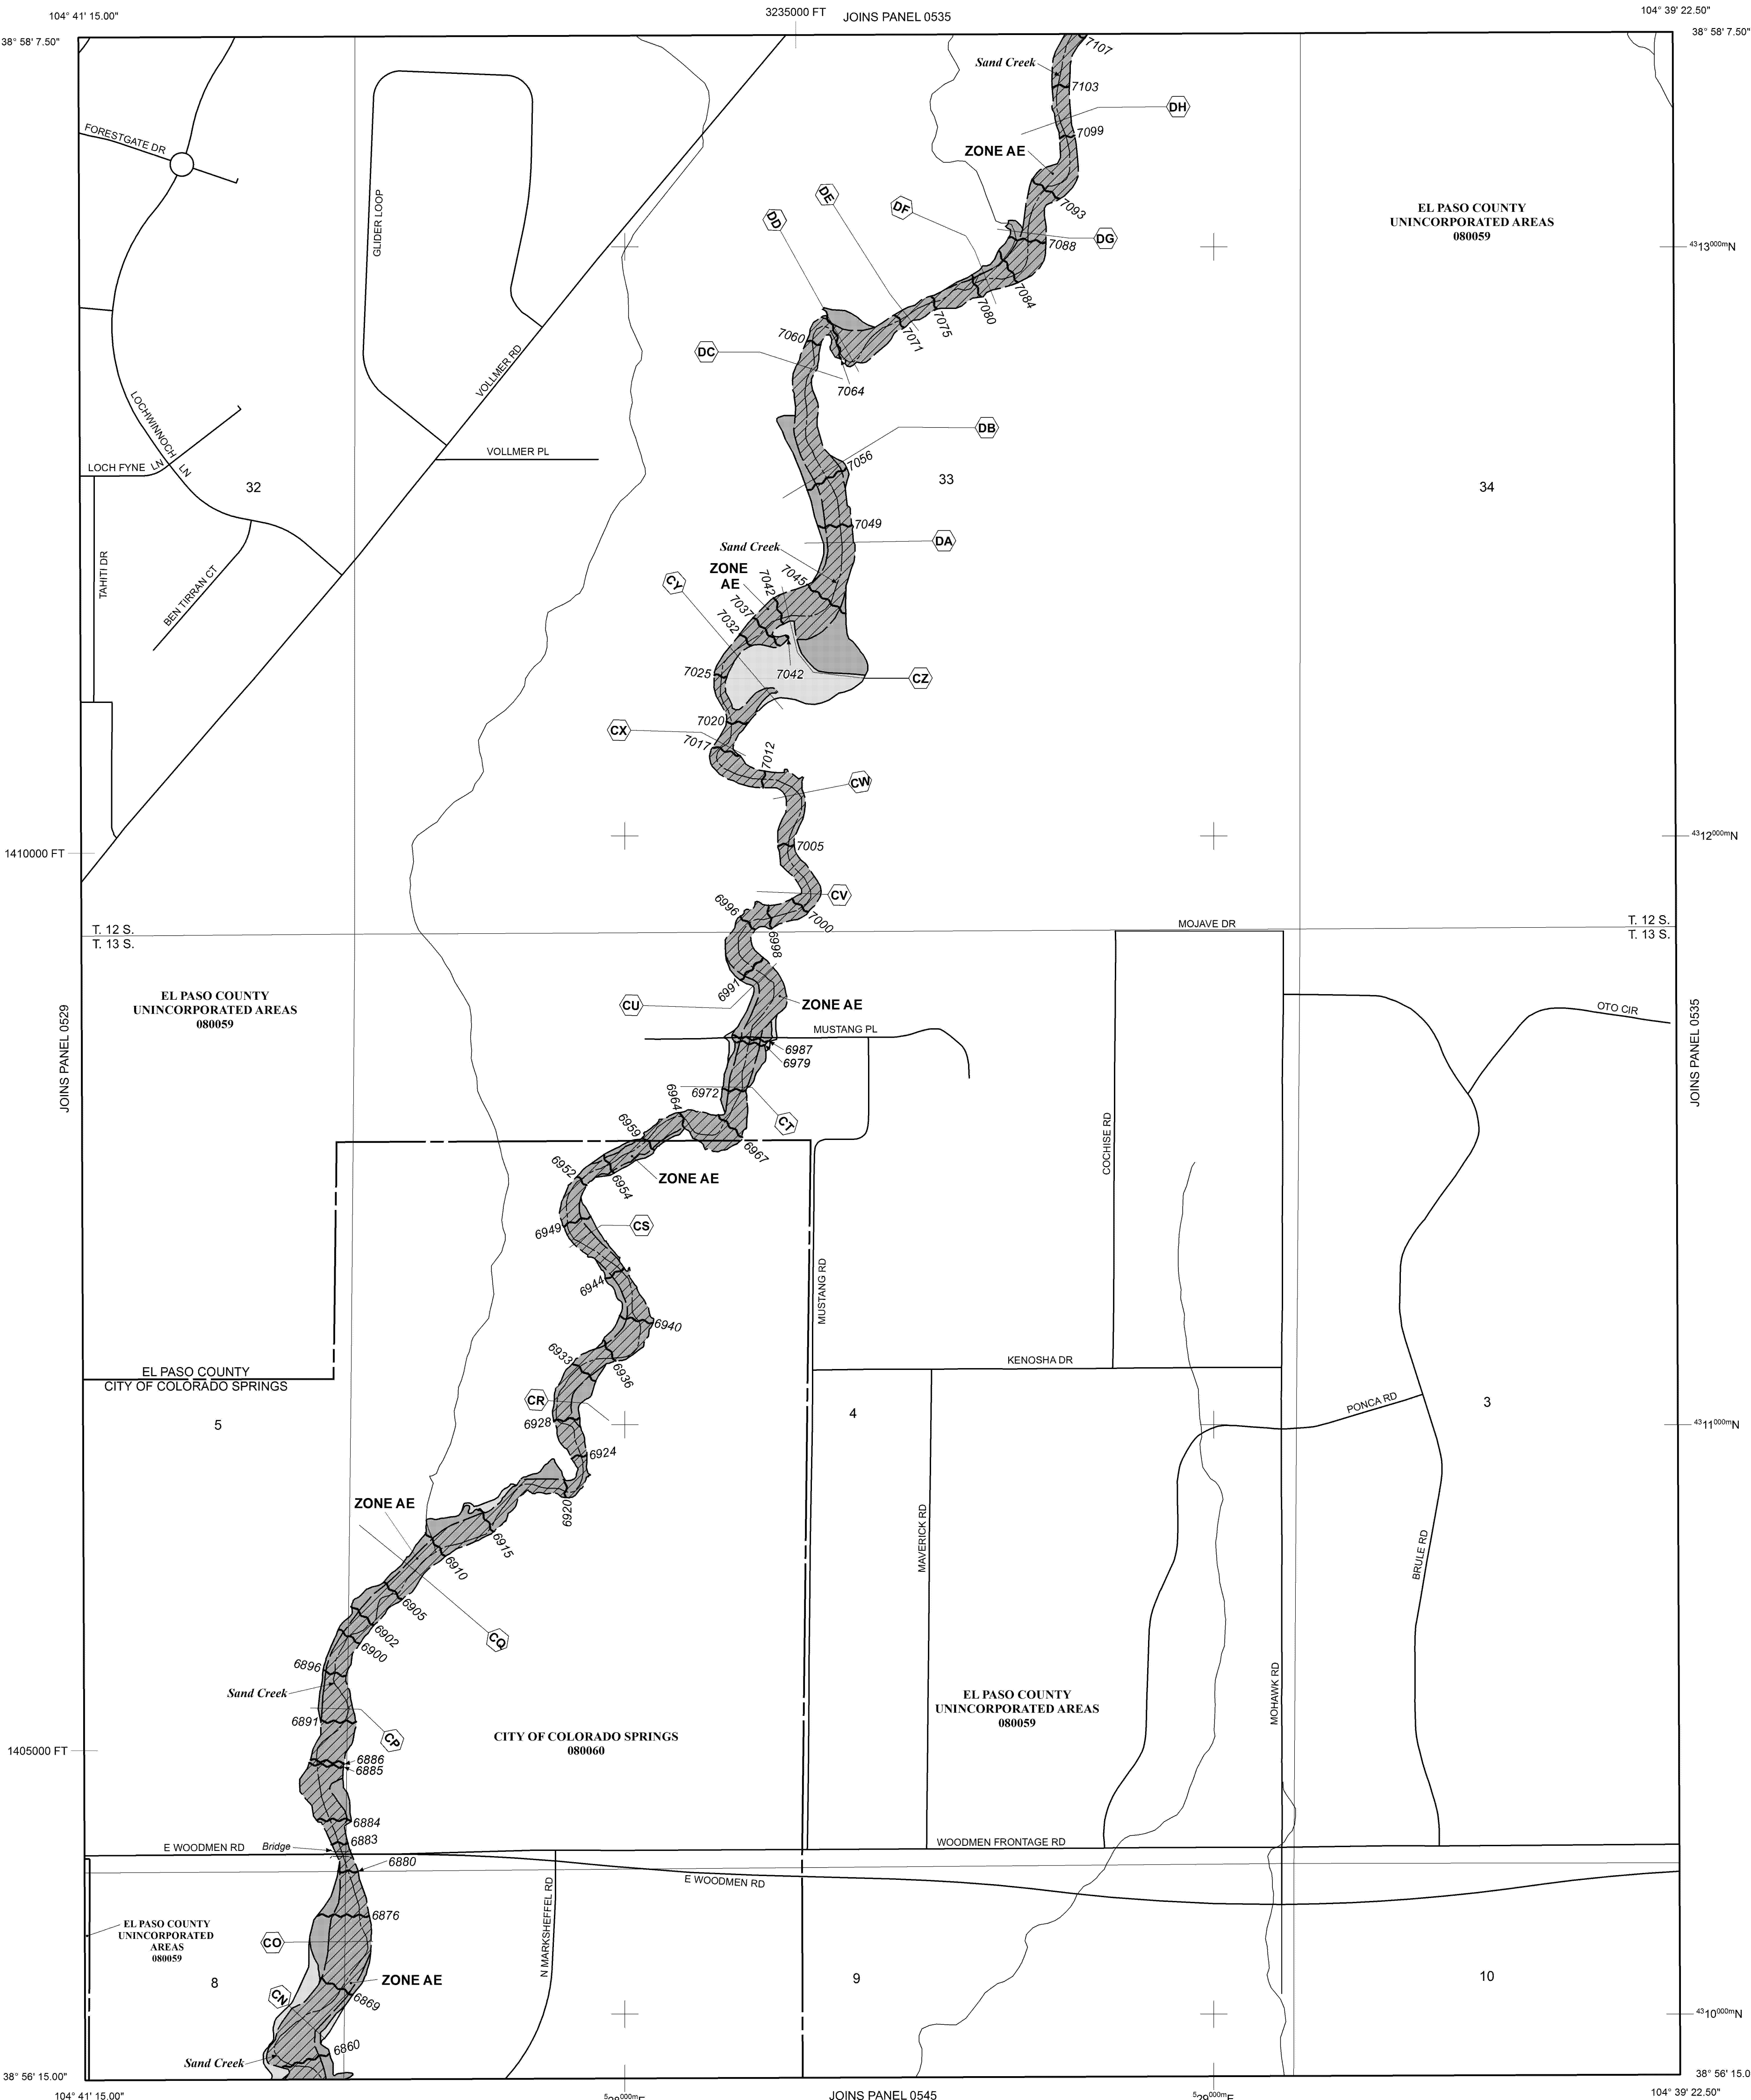

NOTE: MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 12 SOUTH, RANGE 65 WEST, AND TOWNSHIP 13 SOUTH, RANGE 65 WEST.

**LEGEND**

**SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD**

The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equalled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.

- ZONE A** No Base Flood Elevations determined.
- ZONE AE** Base Flood Elevations determined.
- ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.
- ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.
- ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
- ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.
- ZONE V** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.
- ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.

**FLOODWAY AREAS IN ZONE AE**

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.

**OTHER FLOOD AREAS**

**ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.

**OTHER AREAS**

**ZONE X** Areas determined to be outside the 0.2% annual chance floodplain.

**ZONE D** Areas in which flood hazards are undetermined, but possible.

**COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS**

**OTHERWISE PROTECTED AREAS (OPAs)**

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.

- Floodplain boundary
- Floodway boundary
- Zone D Boundary
- CBRS and OPA boundary

Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities.

Base Flood Elevation line and value; elevation in feet\* (EL 987)

Base Flood Elevation value where uniform within zone; elevation in feet\*

\* Referenced to the North American Vertical Datum of 1988 (NAVD 88)

Cross section line

Transsect line

Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)

1000-meter Universal Transverse Mercator grid ticks, zone 13

5000-foot grid ticks: Colorado State Plane coordinate system, central zone (EPSG:3023), Lambert Conformal Conic Projection

Bench mark (see explanation in Notes to Users section of this FIRM panel)

River Mile

MAP REPOSITORIES

Refer to Map Repositories list on Map Index

EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP

MARCH 17, 1997

EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL

DECEMBER 7, 2018 - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision.

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

MAP SCALE 1" = 500'

250 0 500 1000 FEET

150 0 150 300 METERS

**NFIP** PANEL 0533G

**FIRM**  
FLOOD INSURANCE RATE MAP  
EL PASO COUNTY,  
COLORADO  
AND INCORPORATED AREAS

PANEL 533 OF 1300  
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

| COMMUNITY                 | NUMBER | PANEL | SUFFIX |
|---------------------------|--------|-------|--------|
| COLORADO SPRINGS, CITY OF | 08060  | 0533  | G      |
| EL PASO COUNTY            | 08059  | 0533  | G      |

Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

**MAP NUMBER**  
08041C0533G

**MAP REVISED**  
DECEMBER 7, 2018

Federal Emergency Management Agency



## NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

**Coastal Base Flood Elevations** shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services  
NOAA, NIMS12  
National Geodetic Survey  
SSMC-3, #9202  
1315 East-West Highway  
Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

**Base Map** information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, and Anderson Consulting Engineers, Inc. These data are current as of 2008.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

**Corporate limits** shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.

Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FIRM) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at <http://www.msc.fema.gov/>.


If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call 1-877-FEMA MAP (1-877-336-2627) or visit the FEMA website at <http://www.fema.gov/business/nfp>.

### El Paso County Vertical Datum Offset Table

| Flooding Source | Vertical Datum Offset (ft) |
|-----------------|----------------------------|
|-----------------|----------------------------|

REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION


### Panel Location Map

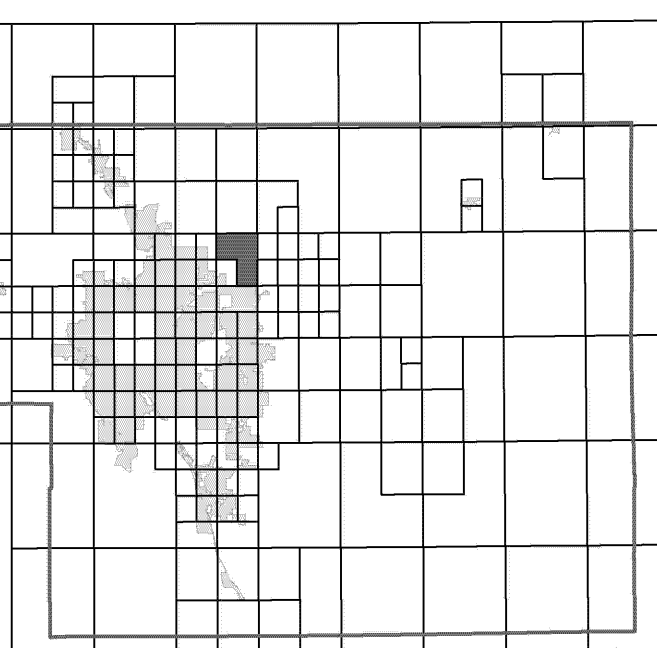

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCW) and the Federal Emergency Management Agency (FEMA).



Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

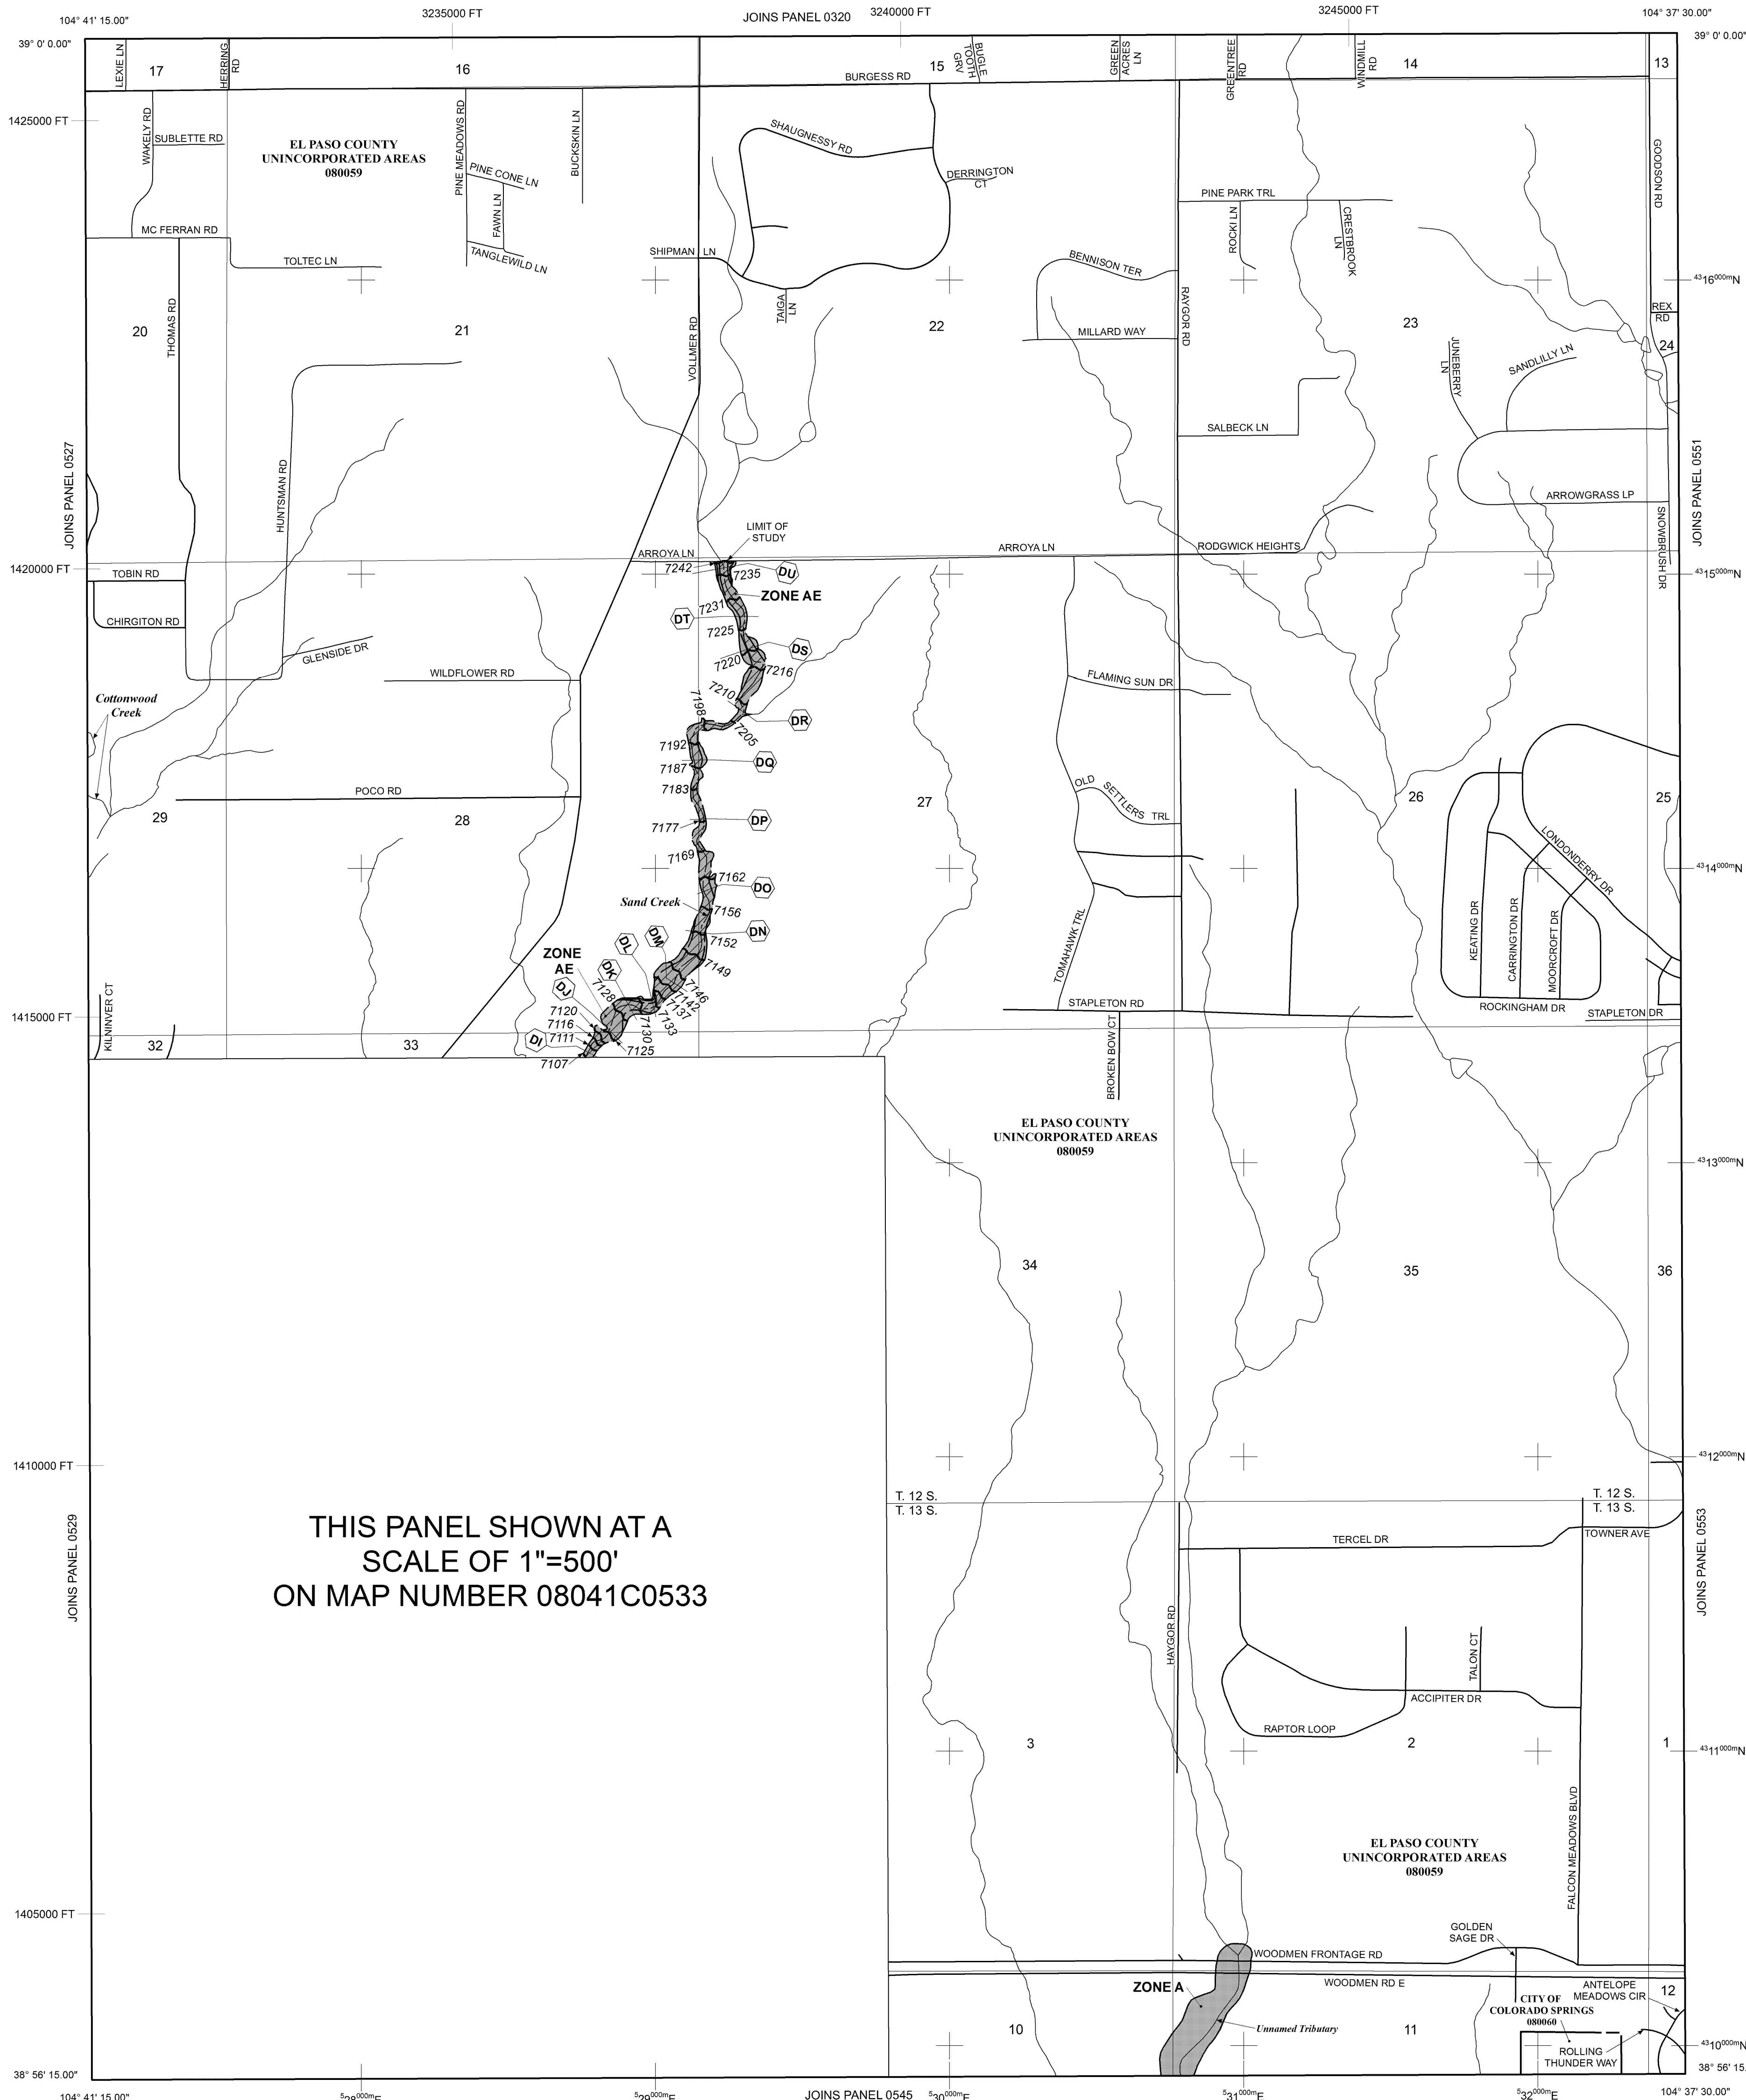

THIS PANEL SHOWN AT A SCALE OF 1"=500' ON MAP NUMBER 08041C0533

NOTE: MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 12 SOUTH, RANGE 65 WEST, AND TOWNSHIP 13 SOUTH, RANGE 65 WEST.

## LEGEND

SPECIAL FLOOD HAZARD AREAS (SFHAs) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD

The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equalled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.

**ZONE A** No Base Flood Elevations determined.  
**ZONE AE** Base Flood Elevations determined.  
**ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.

**ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.

**ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.

**ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.

**ZONE V** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.

**ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.

FLOODWAY AREAS IN ZONE AE

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.

OTHER FLOOD AREAS

**ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot, or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.

OTHER AREAS

**ZONE X** Areas determined to be outside the 0.2% annual chance floodplain.

**ZONE D** Areas in which flood hazards are undetermined, but possible.

COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS

OTHERWISE PROTECTED AREAS (OPAs)

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.

Floodplain boundary

Floodway boundary

Zone D boundary

CBRS and OPA boundary

Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities.

Base Flood Elevation line and value; elevation in feet\* (EL 987)

Base Flood Elevation value where uniform within zone; elevation in feet\*

\* Referenced to the North American Vertical Datum of 1988 (NAVD 88)

Cross section line

Transsect line

57° 07' 30.00" 32° 22' 30.00" Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)

4750000N 1000-meter Universal Transverse Mercator grid ticks, zone 13

6000000 FT 5000-foot grid ticks: Colorado State Plane coordinate system, central zone (FIPSZONE 0502), Lambert Conformal Conic Projection

Bench mark (see explanation in Notes to Users section of this FIRM panel)

River Mile


MAP REPOSITORIES Refer to Map Repositories list on Map Index

EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP MARCH 17, 1997

EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL DECEMBER 7, 2018 - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

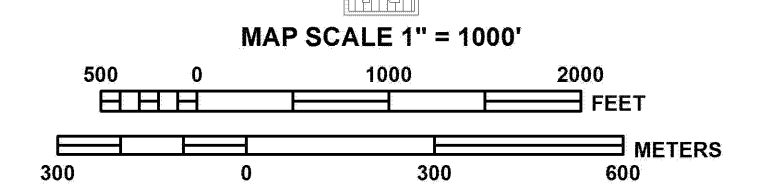

## NFIP PANEL 0535G

### FIRM FLOOD INSURANCE RATE MAP EL PASO COUNTY, COLORADO AND INCORPORATED AREAS

PANEL 535 OF 1300 (SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

| COMMUNITY                 | NUMBER | PANEL | SUFFIX |
|---------------------------|--------|-------|--------|
| COLORADO SPRINGS, CITY OF | 08050  | 0535  | G      |
| EL PASO COUNTY            | 08059  | 0535  | G      |


Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

MAP NUMBER 08041C0535G

MAP REVISED DECEMBER 7, 2018


Federal Emergency Management Agency

# Custom Soil Resource Report for El Paso County Area, Colorado

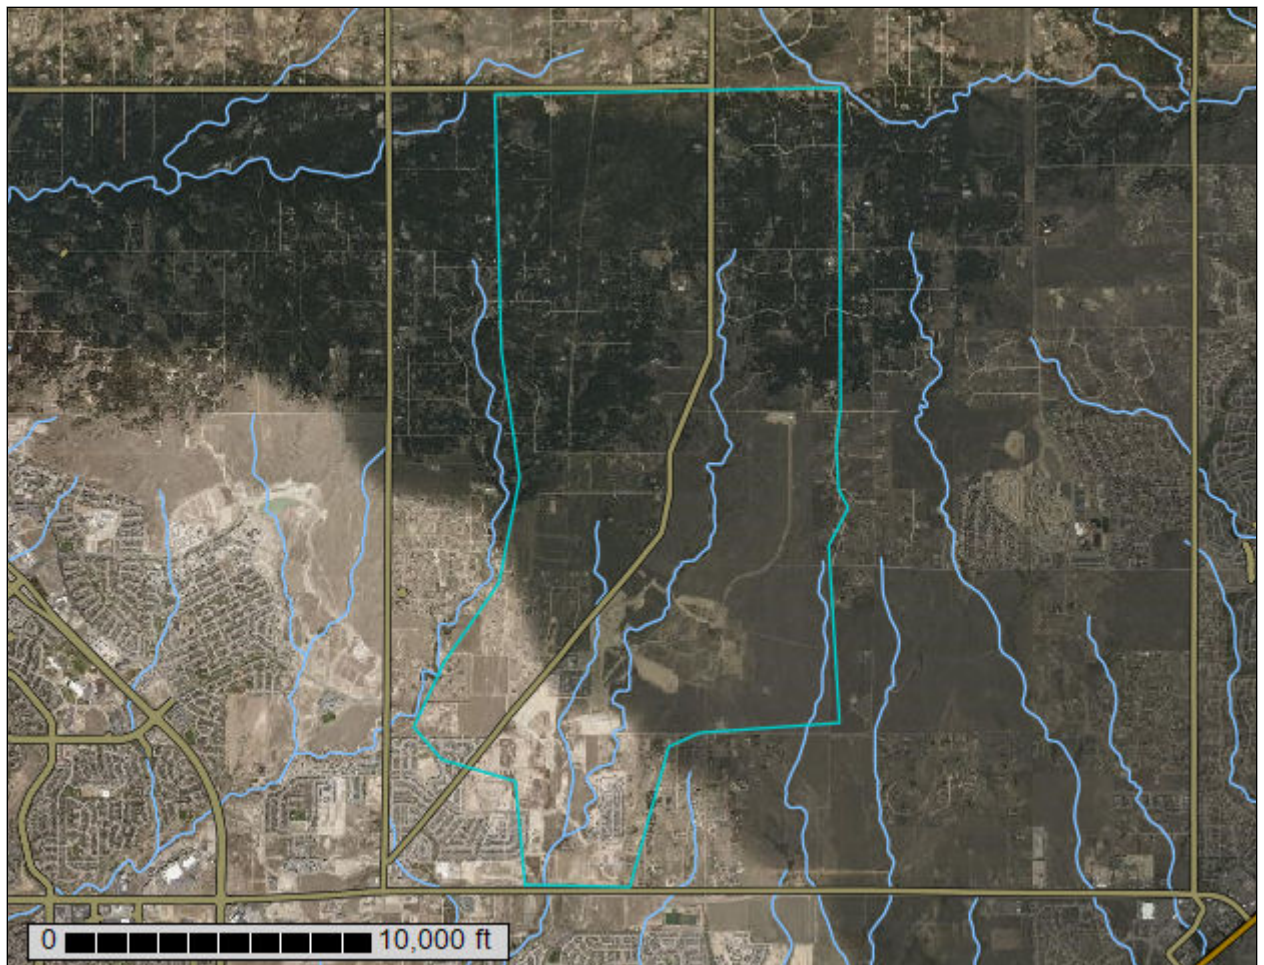




# Custom Soil Resource Report Soil Map

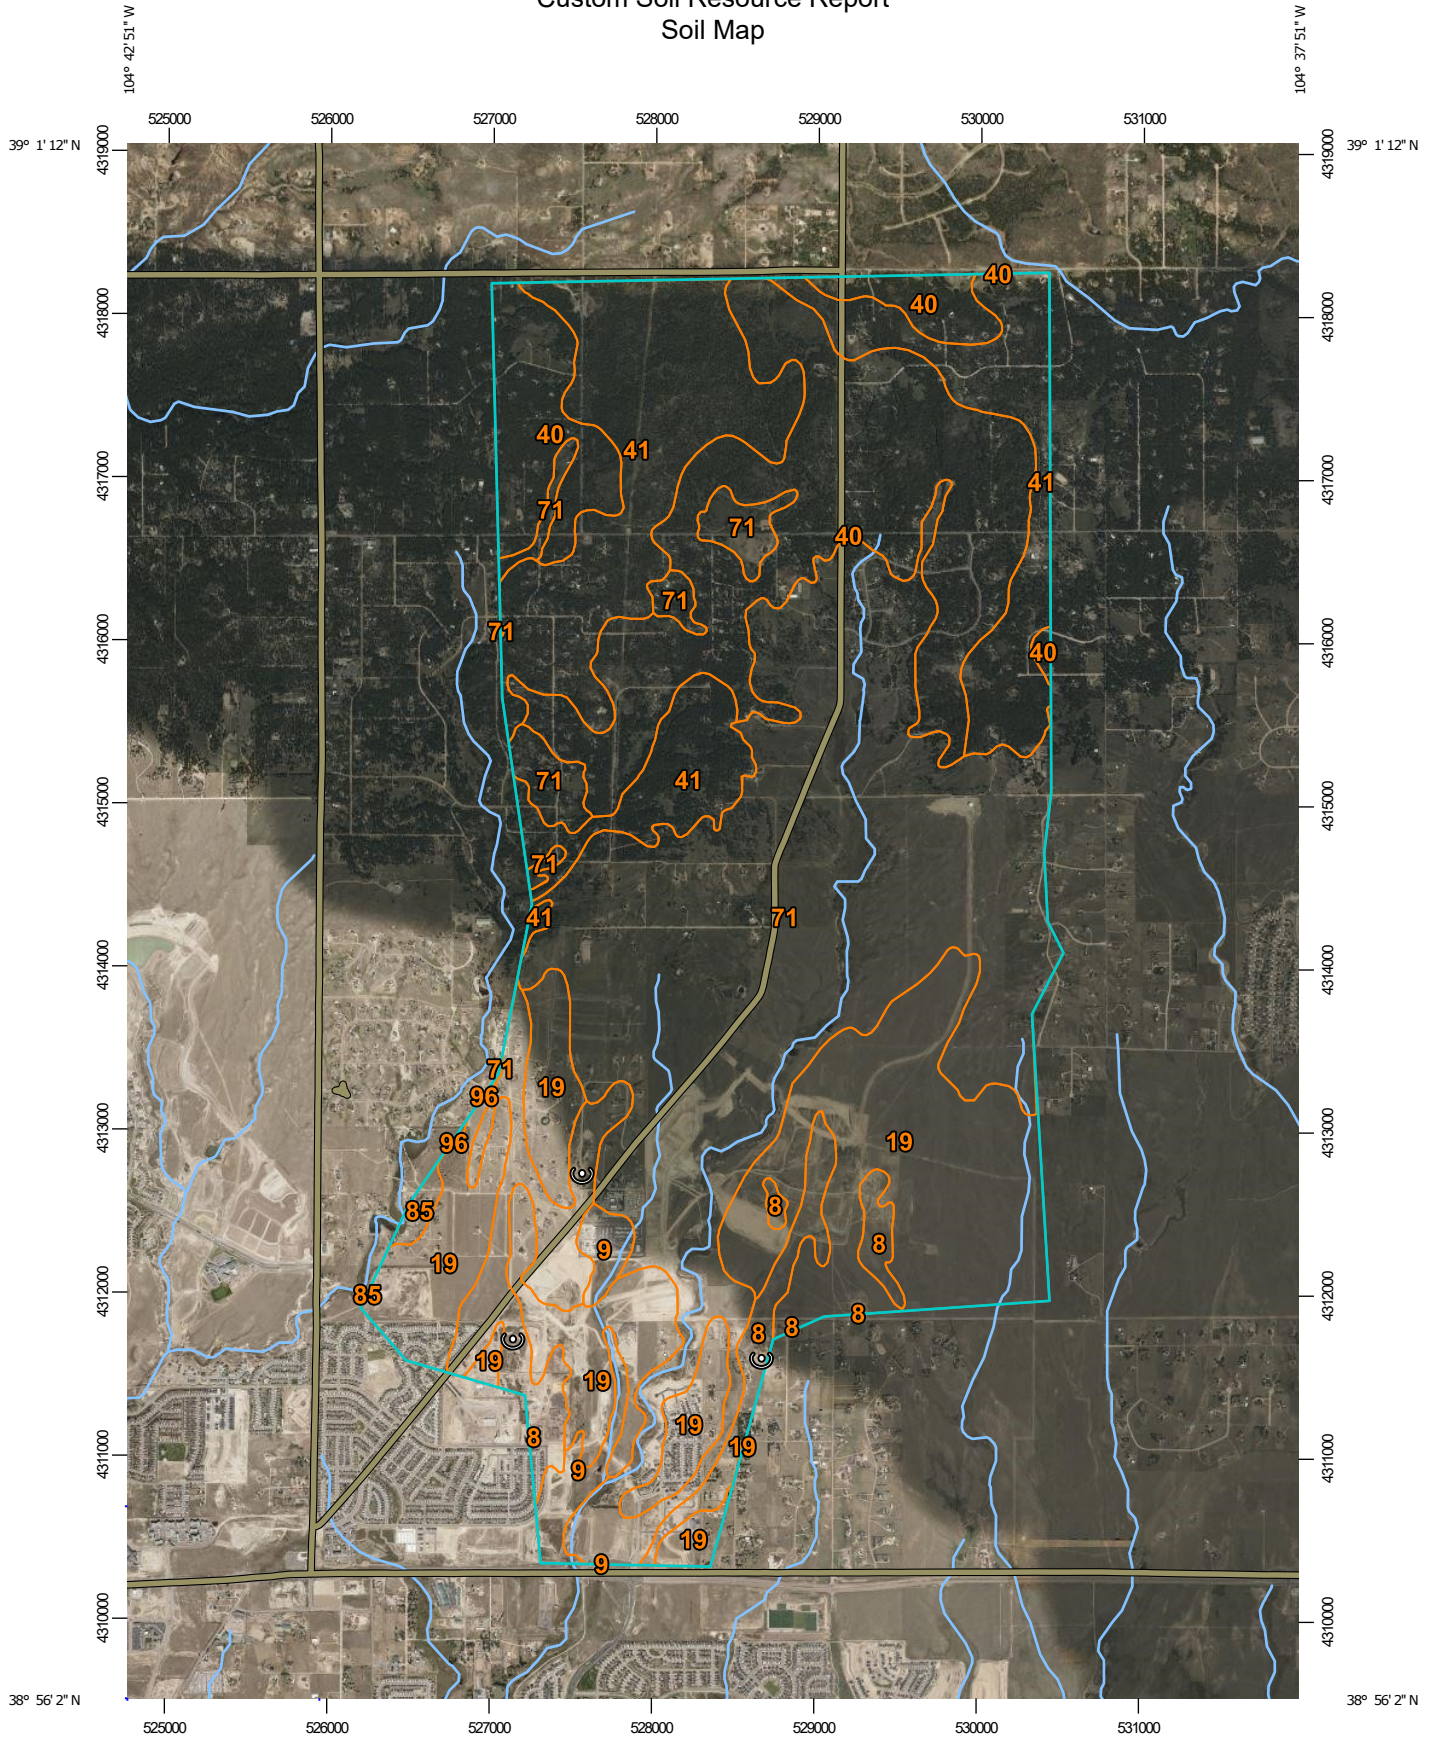

Map Scale: 1:46,500 if printed on A portrait (8.5" x 11") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84

## Map Unit Legend

| Map Unit Symbol                    | Map Unit Name  | Acres in AOI   | Percent of AOI |
|------------------------------------|--|----------------|----------------|
| 8                                  | Blakeland loamy sand, 1 to 9 percent slopes          | 385.1          | 6.4%           |
| 9                                  | Blakeland-Fluvaquentic Haplaquolls                   | 91.2           | 1.5%           |
| 19                                 | Columbine gravelly sandy loam, 0 to 3 percent slopes | 1,196.8        | 19.9%          |
| 40                                 | Kettle gravelly loamy sand, 3 to 8 percent slopes    | 1,190.9        | 19.8%          |
| 41                                 | Kettle gravelly loamy sand, 8 to 40 percent slopes   | 1,028.9        | 17.1%          |
| 71                                 | Pring coarse sandy loam, 3 to 8 percent slopes       | 2,108.3        | 35.0%          |
| 85                                 | Stapleton-Bernal sandy loams, 3 to 20 percent slopes | 16.9           | 0.3%           |
| 96                                 | Truckton sandy loam, 0 to 3 percent slopes           | 2.2            | 0.0%           |
| <b>Totals for Area of Interest</b> |  | <b>6,020.4</b> | <b>100.0%</b>  |

## Map Unit Descriptions


The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.


Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas



# Custom Soil Resource Report Map—Hydrologic Soil Group

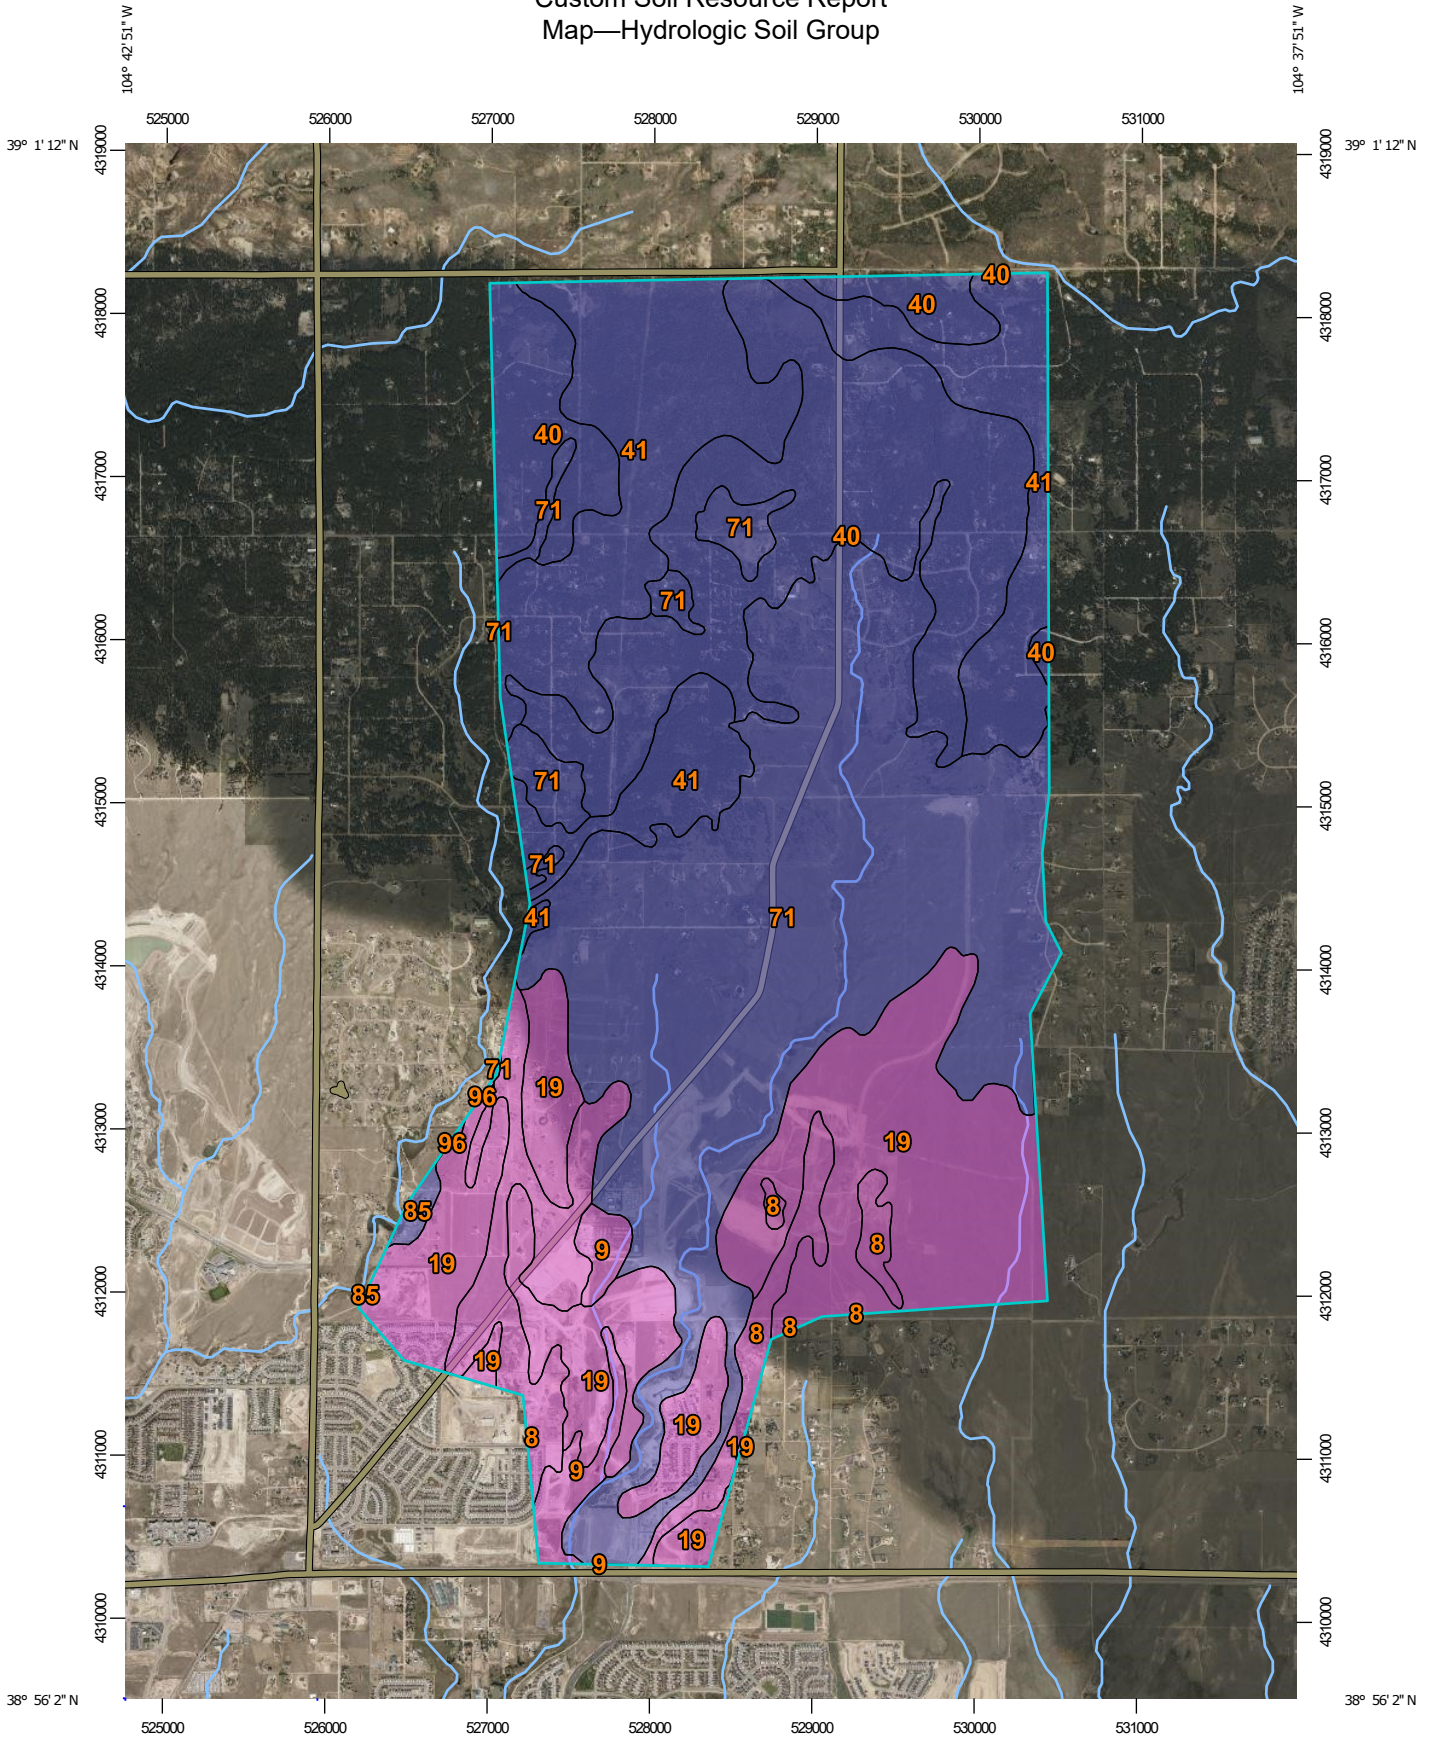

Map Scale: 1:46,500 if printed on A portrait (8.5" x 11") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84

**Table—Hydrologic Soil Group**

| Map unit symbol                    | Map unit name  | Rating | Acres in AOI   | Percent of AOI |
|------------------------------------|--|--------|----------------|----------------|
| 8                                  | Blakeland loamy sand, 1 to 9 percent slopes          | A      | 385.1          | 6.4%           |
| 9                                  | Blakeland-Fluvaquentic Haplaquolls                   | A      | 91.2           | 1.5%           |
| 19                                 | Columbine gravelly sandy loam, 0 to 3 percent slopes | A      | 1,196.8        | 19.9%          |
| 40                                 | Kettle gravelly loamy sand, 3 to 8 percent slopes    | B      | 1,190.9        | 19.8%          |
| 41                                 | Kettle gravelly loamy sand, 8 to 40 percent slopes   | B      | 1,028.9        | 17.1%          |
| 71                                 | Pring coarse sandy loam, 3 to 8 percent slopes       | B      | 2,108.3        | 35.0%          |
| 85                                 | Stapleton-Bernal sandy loams, 3 to 20 percent slopes | B      | 16.9           | 0.3%           |
| 96                                 | Truckton sandy loam, 0 to 3 percent slopes           | A      | 2.2            | 0.0%           |
| <b>Totals for Area of Interest</b> |  |        | <b>6,020.4</b> | <b>100.0%</b>  |

**Rating Options—Hydrologic Soil Group**


*Aggregation Method: Dominant Condition*

*Component Percent Cutoff: None Specified*

*Tie-break Rule: Higher*

**APPENDIX B**

**EXISTING CONDITIONS HYDROLOGIC  
CALCULATIONS**

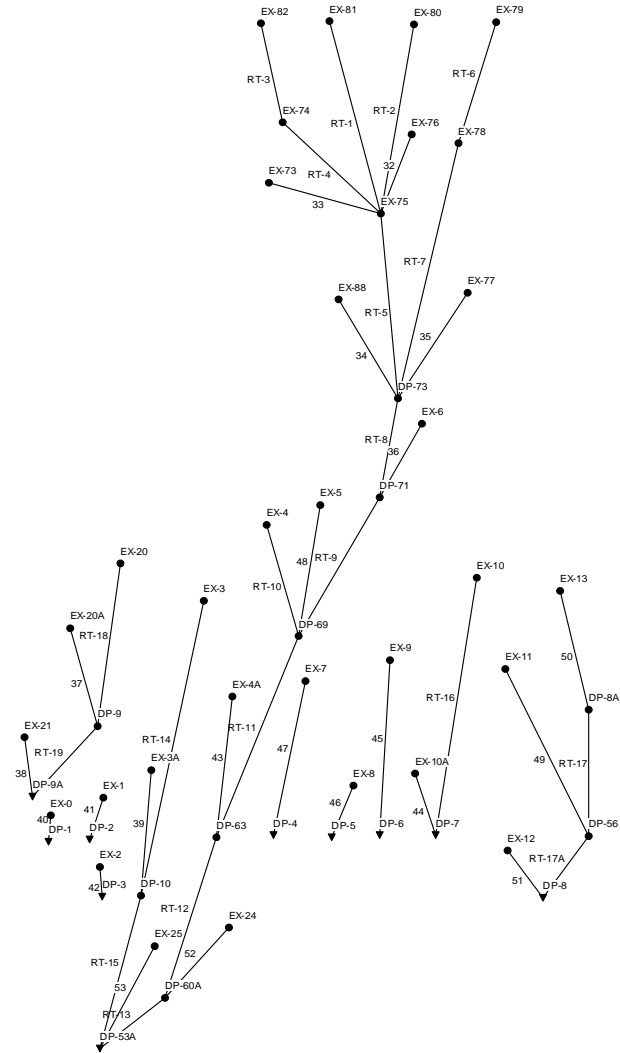

**Sterling Ranch MDDP**  
**Sand Creek and East Fork Sand Creek - Existing Condition Composite CN & Impervious % Table**  
6/21/2018

| Basin  | Basin    | Basin | Basin   | Sub-Area 1 |     |      |        | Sub-Area 2 |       |      |        | Sub-Area 3 |     |      |        | Sub-Area 4 |     |      |        | Sub-Area 5 |     |      |        | Sub-Area 6 |     |      |        | Sub-Area 7 |     |      |        | Sub-Area 8 |     |         |       | Sub-Area 9 |     |     |               | Sub-Areas   | % HSG | % HSG | Weighted | Weighted |     |    |    |
|--------|----------|-------|---------|------------|-----|------|--------|------------|-------|------|--------|------------|-----|------|--------|------------|-----|------|--------|------------|-----|------|--------|------------|-----|------|--------|------------|-----|------|--------|------------|-----|---------|-------|------------|-----|-----|---------------|-------------|-------|-------|----------|----------|-----|----|----|
| ID     | Area     | Area  | Area    | Area       | Imp | Type | Value  | Area       | Imp   | Type | Value  | Area       | Imp | Type | Value  | Area       | Imp | Type | Value  | Area       | Imp | Type | Value  | Area       | Imp | Type | Value  | Area       | Imp | Type | Value  | Area       | Imp | Type    | Value | Total      | A   | B   | Sub Areas Imp | Sub Area CN |       |       |          |          |     |    |    |
|        | (SF)     | (AC)  | (SQ MI) | (AC)       | (%) |      | (used) | (AC)       | (%)   |      | (used) | (AC)       | (%) |      | (used) | (AC)       | (%) |      | (used) | (AC)       | (%) |      | (used) | (AC)       | (%) |      | (used) | (AC)       | (%) |      | (used) | (AC)       | (%) | (Check) | %     | %          | %   | No. |               |             |       |       |          |          |     |    |    |
| EX-0   | 1034765  | 23.8  | 0.037   | 23.8       | 0   | A    | 41     | 62         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       | 24         | 100 | 0   | 0             | 62          |       |       |          |          |     |    |    |
| EX-1   | 1120663  | 25.7  | 0.040   | 25.7       | 0   | A    | 41     | 62         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       | 26         | 100 | 0   | 0             | 62          |       |       |          |          |     |    |    |
| EX-2   | 238567   | 5.5   | 0.009   | 5.5        | 0   | A    | 41     | 62         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       | 5          | 100 | 0   | 0             | 62          |       |       |          |          |     |    |    |
| EX-3   | 5956997  | 136.8 | 0.214   | 91.4       | 0   | B    | 62     | 62         | 45.3  | 10   | B      | 63         | 63  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       | 137        | 0   | 100 | 3             | 62          |       |       |          |          |     |    |    |
| EX-3A  | 8193769  | 188.1 | 0.294   | 69.6       | 0   | A    | 41     | 41         | 23.2  | 72   | A      | 81         | 88  | 61.0 | 0      | B          | 62  | 62   | 27.5   | 72         | B   | 88   | 88     | 6.4        | 10  | A    | 44     | 63         |     |      |        |            |     |         |       |            | 188 | 53  | 47            | 20          | 61    |       |          |          |     |    |    |
| EX-4   | 8363354  | 192.0 | 0.300   | 119.4      | 0   | B    | 62     | 62         | 17.3  | 5    | B      | 62         | 62  | 55.4 | 10     | B          | 63  | 63   |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     | 192 | 0             | 100         | 3     | 62    |          |          |     |    |    |
| EX-4A  | 6600380  | 151.5 | 0.237   | 5.8        | 0   | A    | 41     | 41         | 95.0  | 0    | B      | 62         | 62  | 43.9 | 0.5    | B          | 62  | 62   | 6.8    | 27         | A   | 56   | 71     |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     | 151           | 8           | 92    | 1     | 62       |          |     |    |    |
| EX-5   | 6703477  | 153.9 | 0.240   | 126.9      | 0   | B    | 62     | 62         | 27.0  | 0.5  | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     | 154 | 0             | 100         | 0     | 62    |          |          |     |    |    |
| EX-6   | 3928504  | 90.2  | 0.141   | 73.5       | 2   | B    | 62     | 62         | 16.7  | 0.5  | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     | 90            | 0           | 100   | 2     | 62       |          |     |    |    |
| EX-7   | 7187603  | 165.0 | 0.258   | 74.8       | 0   | A    | 41     | 41         | 19.8  | 0    | B      | 62         | 62  | 58.7 | 27     | A          | 56  | 71   | 11.7   | 27         | B   | 71   | 71     |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     | 165           | 81          | 12    | 12    | 56       |          |     |    |    |
| EX-8   | 1828489  | 42.0  | 0.066   | 36.7       | 0   | A    | 41     | 41         | 5.2   | 27   | A      | 56         | 71  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     | 42            | 88          | 12    | 3     | 45       |          |     |    |    |
| EX-9   | 5747518  | 131.9 | 0.206   | 72.5       | 0   | A    | 41     | 41         | 47.9  | 27   | A      | 56         | 71  | 11.5 | 0      | B          | 62  | 62   |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               | 132         | 91    | 9     | 10       | 54       |     |    |    |
| EX-10  | 11793328 | 270.7 | 0.423   | 34.0       | 0   | A    | 41     | 41         | 122.0 | 0    | B      | 62         | 62  | 28.4 | 7      | B          | 63  | 63   | 86.3   | 10         | B   | 63   | 63     |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               | 271         | 13    | 87    | 4        | 60       |     |    |    |
| EX-10A | 7809034  | 179.3 | 0.280   | 177.7      | 0   | A    | 41     | 41         | 1.5   | 0    | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               | 179         | 99    | 1     | 0        | 41       |     |    |    |
| EX-11  | 9119024  | 209.3 | 0.327   | 193.2      | 0   | A    | 41     | 41         | 16.2  | 0    | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               | 209         | 92    | 8     | 0        | 43       |     |    |    |
| EX-12  | 1719818  | 39.5  | 0.062   | 22.1       | 0   | A    | 41     | 41         | 17.4  | 10   | A      | 44         | 63  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               | 39          | 56    | 44    | 4        | 51       |     |    |    |
| EX-13  | 3888572  | 89.3  | 0.139   | 29.9       | 0   | A    | 41     | 41         | 36.2  | 0    | B      | 62         | 62  | 16.9 | 2      | B          | 62  | 62   | 6.3    | 7          | B   | 63   | 63     |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               | 89          | 34    | 66    | 1        | 55       |     |    |    |
| EX-20  | 6246166  | 143.4 | 0.224   | 32.4       | 0   | A    | 41     | 63         | 75.8  | 0    | B      | 62         | 62  | 35.1 | 10     | B          | 63  | 63   |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             | 143   | 23    | 77       | 2        | 62  |    |    |
| EX-20A | 7828526  | 179.7 | 0.281   | 48.2       | 10  | A    | 44     | 63         | 82.4  | 12   | A      | 46         | 65  | 6.7  | 0      | B          | 62  | 62   | 42.3   | 10         | B   | 63   | 63     |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             | 180   | 73    | 27       | 11       | 64  |    |    |
| EX-21  | 1448905  | 33.3  | 0.052   | 33.3       | 12  | B    | 65     | 65         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             | 33    | 0     | 100      | 12       | 65  |    |    |
| EX-24  | 2750098  | 63.1  | 0.099   | 10.1       | 0   | A    | 41     | 41         | 13.6  | 10   | A      | 44         | 63  | 39.4 | 0.5    | B          | 62  | 62   |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 63    | 38       | 62       | 2   | 59 |    |
| EX-25  | 2370050  | 54.4  | 0.085   | 42.6       | 0   | A    | 41     | 41         | 6.2   | 0.5  | A      | 41         | 41  | 5.4  | 0.5    | B          | 62  | 62   |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             | 54    | 90    | 10       | 0        | 43  |    |    |
| EX-73  | 3921483  | 90.0  | 0.141   | 90.0       | 5   | B    | 63     | 63         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             | 90    | 0     | 100      | 5        | 63  |    |    |
| EX-74  | 5213558  | 119.7 | 0.187   | 119.7      | 10  | B    | 63     | 63         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 120   | 0        | 100      | 10  | 63 |    |
| EX-75  | 3452599  | 79.3  | 0.124   | 79.3       | 10  | B    | 63     | 63         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 79    | 0        | 100      | 10  | 63 |    |
| EX-76  | 3761442  | 86.4  | 0.135   | 67.2       | 10  | B    | 63     | 63         | 19.2  | 0    | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 86    | 0        | 100      | 8   | 63 |    |
| EX-77  | 10046025 | 230.6 | 0.360   | 222.7      | 2   | B    | 62     | 62         | 7.9   | 0.5  | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 231   | 0        | 100      | 2   | 62 |    |
| EX-78  | 6778000  | 155.6 | 0.243   | 155.6      | 10  | B    | 63     | 63         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 156   | 0        | 100      | 10  | 63 |    |
| EX-79  | 8231666  | 189.0 | 0.295   | 189.0      | 7   | B    | 63     | 63         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 189   | 0        | 100      | 7   | 63 |    |
| EX-80  | 6434190  | 147.7 | 0.231   | 147.7      | 7   | B    | 63     | 63         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 148   | 0        | 100      | 7   | 63 |    |
| EX-81  | 11449750 | 262.9 | 0.411   | 262.9      | 2   | B    | 62     | 62         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       | 263   | 0        | 100      | 2   | 62 |    |
| EX-82  | 5130284  | 117.8 | 0.184   | 117.8      | 2   | B    | 62     | 62         |       |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       |       | 118      | 0        | 100 | 2  | 62 |
| EX-88  | 6062553  | 139.2 | 0.217   | 133.6      | 2   | B    | 62     | 62         | 5.5   | 0.5  | B      | 62         | 62  |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |      |        |            |     |         |       |            |     |     |               |             |       |       | 139      | 0        | 100 | 2  | 62 |

**Sterling Ranch Master Development Drainage Plan  
Hydrologic Study - Existing Conditions - Reach Data  
6/20/2018**

| Reach ID | Reach Length<br>L1<br>(ft) | Reach Vert. Drop<br>H1<br>(ft) | Reach Slope<br>S1<br>% | Mannings N Value<br>n | Reach Side Slope<br>SS<br>(H/V) | Bottom Width<br>BW<br>(ft) | Diameter<br>D<br>(ft) |
|----------|----------------------------|--------------------------------|------------------------|-----------------------|---------------------------------|----------------------------|-----------------------|
| RT-1     | 3975                       | 100                            | 2.5%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-2     | 4570                       | 120                            | 2.6%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-3     | 2360                       | 65                             | 2.8%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-4     | 2695                       | 65                             | 2.4%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-5     | 4100                       | 92                             | 2.2%                   | 0.05                  | 6                               | 10                         | N/A                   |
| RT-6     | 3030                       | 100                            | 3.3%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-7     | 6145                       | 122                            | 2.0%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-8     | 2160                       | 42                             | 1.9%                   | 0.05                  | 6                               | 15                         | N/A                   |
| RT-9     | 3565                       | 66                             | 1.9%                   | 0.05                  | 6                               | 30                         | N/A                   |
| RT-10    | 3165                       | 68                             | 2.1%                   | 0.05                  | 6                               | 6                          | N/A                   |
| RT-11    | 6400                       | 96                             | 1.5%                   | 0.05                  | 4                               | 40                         | N/A                   |
| RT-12    | 4375                       | 74                             | 1.7%                   | 0.05                  | 6                               | 40                         | N/A                   |
| RT-13    | 1480                       | 22                             | 1.5%                   | 0.05                  | 6                               | 40                         | N/A                   |
| RT-14    | 6365                       | 136                            | 2.1%                   | 0.05                  | 4                               | 6                          | N/A                   |
| RT-15    | 3130                       | 74                             | 2.4%                   | 0.05                  | 4                               | 8                          | N/A                   |
| RT-16    | 5575                       | 138                            | 2.5%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-17A   | 2675                       | 72                             | 2.7%                   | 0.05                  | 6                               | 6                          | N/A                   |
| RT-17B   | 1300                       | 32                             | 2.5%                   | 0.05                  | 6                               | 6                          | N/A                   |
| RT-18    | 3400                       | 74                             | 2.2%                   | 0.05                  | 10                              | 6                          | N/A                   |
| RT-19    | 1670                       | 22                             | 1.3%                   | 0.05                  | 6                               | 6                          | N/A                   |

**Sterling Ranch Master Development Drainage Plan**  
**Sand Creek & East Sand Creek Basins - Existing Condition - Lag Time Calculations**  
6/21/2018

| Basin  | OVERLAND FLOW |      |                |              |             | SHALLOW GUTTER FLOW |              |              |             | SHALLOW CHANNEL FLOW |              |              |             | STORM SEWER FLOW |              |              |             | CHANNELIZED FLOW |              |              |             | Tc<br>Total<br>(min) | Tlag<br>0.6*Tc<br>(min) |
|--------|---------------|------|----------------|--------------|-------------|---------------------|--------------|--------------|-------------|----------------------|--------------|--------------|-------------|------------------|--------------|--------------|-------------|------------------|--------------|--------------|-------------|----------------------|-------------------------|
|        | P2<br>(in)    | n    | Length<br>(ft) | Slope<br>(%) | Tt<br>(min) | Length<br>(ft)      | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) | Length<br>(ft)       | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) | Length<br>(ft)   | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) | Length<br>(ft)   | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) |                      |                         |
| EX-0   | 2.1           | 0.15 | 160            | 2.5          | 16.1        | 0                   | 0            | 0            | 0           | 1200                 | 20           | 2.0          | 10.0        | 0                | 0            | 0            | 0.0         | 0                | 0.0          | 0.0          | 0.0         | 26.1                 | 15.7                    |
| EX-1   | 2.1           | 0.15 | 200            | 2.0          | 21.1        | 0                   | 0            | 0            | 0           | 1450                 | 32           | 2.3          | 10.5        | 0                | 0            | 0            | 0.0         | 0                | 0.0          | 0.0          | 0.0         | 31.6                 | 18.9                    |
| EX-2   | 2.1           | 0.15 | 200            | 1.5          | 23.6        | 0                   | 0            | 0            | 0           | 1050                 | 27           | 2.5          | 7.0         | 0                | 0            | 0            | 0.0         | 0                | 0.0          | 0.0          | 0.0         | 30.6                 | 18.4                    |
| EX-3   | 2.1           | 0.15 | 300            | 5.3          | 19.7        | 0                   | 0            | 0            | 0.0         | 1100                 | 40           | 2.9          | 6.3         | 0                | 0            | 0            | 0.0         | 3540             | 2.7          | 4.1          | 14.4        | 40.4                 | 24.2                    |
| EX-3A  | 2.1           | 0.15 | 200            | 3.0          | 17.9        | 0                   | 0            | 0            | 0.0         | 1200                 | 26           | 2.3          | 8.7         | 0                | 0            | 0            | 0.0         | 3360             | 2.1          | 4.5          | 12.4        | 39.0                 | 23.4                    |
| EX-4   | 2.1           | 0.15 | 300            | 4.7          | 20.8        | 0                   | 0            | 0            | 0.0         | 770                  | 22           | 2.7          | 4.8         | 0                | 0            | 0            | 0.0         | 3900             | 3.0          | 4.0          | 16.3        | 41.8                 | 25.1                    |
| EX-4A  | 2.1           | 0.15 | 200            | 3.0          | 17.9        | 0                   | 0            | 0            | 0.0         | 250                  | 8            | 2.8          | 1.5         | 0                | 0            | 0            | 0.0         | 5190             | 1.9          | 4.3          | 20.1        | 39.5                 | 23.7                    |
| EX-5   | 2.1           | 0.15 | 200            | 4.0          | 16.0        | 0                   | 0            | 0            | 0.0         | 1050                 | 34           | 2.8          | 6.3         | 0                | 0            | 0            | 0.0         | 4425             | 2.3          | 3.8          | 19.4        | 41.6                 | 25.0                    |
| EX-6   | 2.1           | 0.15 | 300            | 5.0          | 20.2        | 0                   | 0            | 0            | 0.0         | 250                  | 11           | 3.2          | 1.3         | 0                | 0            | 0            | 0.0         | 3490             | 2.3          | 3.8          | 15.3        | 36.8                 | 22.1                    |
| EX-7   | 2.1           | 0.15 | 300            | 2.0          | 29.1        | 0                   | 0            | 0            | 0.0         | 1650                 | 42           | 2.4          | 11.5        | 0                | 0            | 0            | 0.0         | 3950             | 2.1          | 4.2          | 15.7        | 56.3                 | 33.8                    |
| EX-8   | 2.1           | 0.15 | 200            | 2.0          | 21.1        | 0                   | 0            | 0            | 0.0         | 1600                 | 35           | 2.3          | 11.6        | 0                | 0            | 0            | 0.0         | 0                | 0.0          | 0.0          | 0.0         | 32.7                 | 19.6                    |
| EX-9   | 2.1           | 0.15 | 200            | 2.0          | 21.1        | 0                   | 0            | 0            | 0.0         | 800                  | 26           | 2.8          | 4.8         | 0                | 0            | 0            | 0.0         | 3775             | 2.1          | 4.0          | 15.7        | 41.5                 | 24.9                    |
| EX-10  | 2.1           | 0.15 | 300            | 5.3          | 19.7        | 0                   | 0            | 0            | 0.0         | 880                  | 32           | 2.9          | 5.1         | 0                | 0            | 0            | 0.0         | 6133             | 2.2          | 4.6          | 22.2        | 47.0                 | 28.2                    |
| EX-10A | 2.1           | 0.15 | 200            | 2.0          | 21.1        | 0                   | 0            | 0            | 0.0         | 1440                 | 35           | 2.4          | 10.0        | 0                | 0            | 0            | 0.0         | 5500             | 2.0          | 3.5          | 26.2        | 57.2                 | 34.3                    |
| EX-11  | 2.1           | 0.15 | 200            | 4.0          | 16.0        | 0                   | 0            | 0            | 0.0         | 1620                 | 44           | 2.6          | 10.4        | 0                | 0            | 0            | 0.0         | 3000             | 2.7          | 4.0          | 12.5        | 38.8                 | 23.3                    |
| EX-12  | 2.1           | 0.15 | 200            | 3.0          | 17.9        | 0                   | 0            | 0            | 0.0         | 250                  | 8            | 2.8          | 1.5         | 0                | 0            | 0            | 0.0         | 820              | 2.7          | 2.6          | 5.3         | 24.7                 | 14.8                    |
| EX-13  | 2.1           | 0.15 | 200            | 9.0          | 11.5        | 0                   | 0            | 0            | 0.0         | 250                  | 12           | 3.4          | 1.2         | 0                | 0            | 0            | 0.0         | 4325             | 2.9          | 3.7          | 19.5        | 32.2                 | 19.3                    |
| EX-20  | 2.1           | 0.15 | 300            | 3.8          | 22.5        | 0                   | 0            | 0            | 0.0         | 730                  | 40           | 3.5          | 3.5         | 0                | 0            | 0            | 0.0         | 2200             | 3.6          | 4.3          | 8.5         | 34.5                 | 20.7                    |
| EX-20A | 2.1           | 0.15 | 300            | 4.0          | 22.1        | 0                   | 0            | 0            | 0.0         | 650                  | 20           | 2.7          | 4.0         | 0                | 0            | 0            | 0.0         | 4450             | 1.8          | 4.2          | 17.7        | 43.7                 | 26.2                    |
| EX-21  | 2.1           | 0.15 | 200            | 4.5          | 15.2        | 0                   | 0            | 0            | 0.0         | 1175                 | 42           | 2.9          | 6.8         | 0                | 0            | 0            | 0.0         | 915              | 1.7          | 2.5          | 6.1         | 28.1                 | 16.8                    |
| EX-24  | 2.1           | 0.15 | 200            | 4.4          | 15.3        | 0                   | 0            | 0            | 0.0         | 0                    | 0            | 0.0          | 0.0         | 0                | 0            | 0            | 0.0         | 2400             | 2.3          | 3.1          | 12.9        | 28.2                 | 16.9                    |
| EX-25  | 2.1           | 0.15 | 150            | 4.0          | 12.7        | 0                   | 0            | 0            | 0.0         | 0                    | 0            | 0.0          | 0.0         | 0                | 0            | 0            | 0.0         | 2700             | 1.6          | 3.1          | 14.5        | 27.2                 | 16.3                    |
| EX-73  | 2.1           | 0.15 | 300            | 3.3          | 23.7        | 0                   | 0            | 0            | 0.0         | 1650                 | 3.3          | 2.9          | 9.5         | 0                | 0            | 0            | 0.0         | 1230             | 3.3          | 4.2          | 4.9         | 38.1                 | 22.9                    |
| EX-74  | 2.1           | 0.15 | 300            | 4.7          | 20.8        | 0                   | 0            | 0            | 0.0         | 2000                 | 3.5          | 2.8          | 11.9        | 0                | 0            | 0            | 0.0         | 770              | 2.6          | 3.9          | 3.3         | 35.9                 | 21.6                    |
| EX-75  | 2.1           | 0.15 | 300            | 3.3          | 23.7        | 0                   | 0            | 0            | 0.0         | 1200                 | 4.1          | 2.7          | 7.4         | 0                | 0            | 0            | 0.0         | 2300             | 2.8          | 3.1          | 12.4        | 43.5                 | 26.1                    |
| EX-76  | 2.1           | 0.15 | 300            | 3.3          | 23.7        | 0                   | 0            | 0            | 0.0         | 1160                 | 3.4          | 3.1          | 6.2         | 0                | 0            | 0            | 0.0         | 3025             | 2.6          | 3.6          | 14.0        | 44.0                 | 26.4                    |
| EX-77  | 2.1           | 0.15 | 300            | 4.7          | 20.8        | 0                   | 0            | 0            | 0.0         | 1600                 | 4.0          | 3.4          | 7.8         | 0                | 0            | 0            | 0.0         | 4850             | 2.1          | 5.1          | 15.8        | 44.4                 | 26.7                    |
| EX-78  | 2.1           | 0.15 | 300            | 3.3          | 23.7        | 0                   | 0            | 0            | 0.0         | 1560                 | 4.1          | 3.3          | 7.9         | 0                | 0            | 0            | 0.0         | 1850             | 3.2          | 4.5          | 6.9         | 38.5                 | 23.1                    |
| EX-79  | 2.1           | 0.15 | 300            | 4.0          | 22.1        | 0                   | 0            | 0            | 0.0         | 1740                 | 5.6          | 3.5          | 8.3         | 0                | 0            | 0            | 0.0         | 1100             | 1.8          | 3.0          | 6.1         | 36.5                 | 21.9                    |
| EX-80  | 2.1           | 0.15 | 300            | 5.0          | 20.2        | 0                   | 0            | 0            | 0.0         | 1625                 | 4.9          | 3.4          | 8.0         | 0                | 0            | 0            | 0.0         | 2140             | 2.8          | 4.1          | 8.7         | 36.9                 | 22.1                    |
| EX-81  | 2.1           | 0.15 | 300            | 6.7          | 18.0        | 0                   | 0            | 0            | 0.0         | 2000                 | 5.0          | 3.4          | 9.8         | 0                | 0            | 0            | 0.0         | 3600             | 3.1          | 4.9          | 12.2        | 40.0                 | 24.0                    |
| EX-82  | 2.1           | 0.15 | 300            | 3.3          | 23.7        | 0                   | 0            | 0            | 0.0         | 2000                 | 4.7          | 3.3          | 10.1        | 0                | 0            | 0            | 0.0         | 625              | 3.2          | 4.1          | 2.5         | 36.4                 | 21.8                    |
| EX-88  | 2.1           | 0.15 | 300            | 4.7          | 20.8        | 0                   | 0            | 0            | 0.0         | 1750                 | 4.1          | 3.4          | 8.6         | 0                | 0            | 0            | 0.0         | 2760             | 3.1          | 4.0          | 11.5        | 40.8                 | 24.5                    |

DCM TABLE 6-25 WAS USED FOR SHALLOW CONCENTRATED SWALE & GUTTER FLOW  
N VALUE FOR OVERLAND FLOW WAS ASSUMED TO BE 0.15 FOR ALL BASINS  
A ROUGHNESS COEFFICIENT OF 0.050 WAS USED FOR EARTHEN CHANNEL BOTTOMS  
A ROUGHNESS COEFFICIENT OF 0.013 WAS USED FOR CONCRETE LINED CONVEYANCES

## Basin Summary

| Basin  | Peak Flow Rate |          |           |           |           |            |
|--------|----------------|----------|-----------|-----------|-----------|------------|
|        | Q2 (cfs)       | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) |
| EX-0   | 0.0            | 4.9      | 11.8      | 17.6      | 26.0      | 31.5       |
| EX-1   | 0.0            | 4.4      | 10.9      | 15.9      | 23.2      | 27.9       |
| EX-2   | 0.0            | 0.7      | 1.7       | 2.5       | 3.7       | 4.5        |
| EX-3   | 16.6           | 48.4     | 74.7      | 95.7      | 128.0     | 149.6      |
| EX-3A  | 31.4           | 77.8     | 116.1     | 146.4     | 192.5     | 223.4      |
| EX-4   | 24.5           | 71.7     | 110.6     | 141.7     | 189.4     | 221.2      |
| EX-4A  | 10.1           | 32.1     | 50.4      | 65.5      | 89.0      | 104.8      |
| EX-5   | 14.2           | 46.4     | 73.1      | 94.8      | 128.2     | 150.4      |
| EX-6   | 10.1           | 30.5     | 47.3      | 60.8      | 81.5      | 95.3       |
| EX-7   | 13.0           | 35.9     | 65.5      | 89.1      | 124.0     | 147.0      |
| EX-8   | 1.2            | 9.4      | 20.8      | 29.8      | 42.6      | 50.9       |
| EX-9   | 7.8            | 24.4     | 46.1      | 63.6      | 89.4      | 106.6      |
| EX-10  | 28.2           | 79.8     | 122.7     | 157.6     | 211.7     | 247.9      |
| EX-10A | 0.0            | 18.2     | 45.7      | 67.6      | 100.1     | 121.6      |
| EX-11  | 0.0            | 33.2     | 82.2      | 121.2     | 177.2     | 213.9      |
| EX-12  | 2.0            | 17.0     | 29.4      | 39.3      | 53.7      | 63.4       |
| EX-13  | 0.6            | 17.3     | 31.4      | 42.7      | 59.3      | 70.5       |
| EX-20  | 22.9           | 69.9     | 108.7     | 138.8     | 184.5     | 215.0      |
| EX-20A | 13.9           | 40.9     | 75.9      | 103.9     | 144.8     | 171.9      |
| EX-21  | 6.7            | 15.3     | 22.2      | 27.8      | 36.3      | 41.9       |
| EX-24  | 1.0            | 15.4     | 27.3      | 36.7      | 50.9      | 60.4       |
| EX-25  | 0.0            | 5.8      | 14.4      | 21.3      | 31.4      | 38.2       |
| EX-73  | 12.6           | 34.1     | 51.7      | 65.8      | 87.5      | 102.0      |
| EX-74  | 40.0           | 113.2    | 175.1     | 224.9     | 301.2     | 197.9      |
| EX-75  | 104.1          | 300.6    | 468.8     | 607.4     | 824.6     | 85.8       |
| EX-76  | 11.8           | 29.5     | 44.1      | 55.9      | 74.1      | 86.2       |
| EX-77  | 19.7           | 59.7     | 92.7      | 120.0     | 162.2     | 190.5      |
| EX-78  | 62.6           | 164.3    | 250.5     | 320.0     | 426.4     | 245.4      |
| EX-79  | 40.3           | 104.1    | 156.4     | 197.0     | 258.6     | 299.7      |
| EX-80  | 24.5           | 62.6     | 93.6      | 118.3     | 156.3     | 181.7      |
| EX-81  | 28.0           | 84.9     | 131.6     | 169.3     | 228.0     | 267.2      |
| EX-82  | 20.5           | 62.0     | 95.7      | 121.5     | 160.7     | 186.8      |
| EX-88  | 16.6           | 50.3     | 77.9      | 100.0     | 134.0     | 156.6      |



## Basin Summary

| Basin  | Total Runoff Volume |            |             |             |             |              |
|--------|---------------------|------------|-------------|-------------|-------------|--------------|
|        | V2 (ac-ft)          | V5 (ac-ft) | V10 (ac-ft) | V25 (ac-ft) | V50 (ac-ft) | V100 (ac-ft) |
| EX-0   | 0.00                | 0.25       | 0.62        | 0.92        | 1.37        | 1.7          |
| EX-1   | 0.00                | 0.27       | 0.67        | 1.00        | 1.48        | 1.8          |
| EX-2   | 0.00                | 0.06       | 0.15        | 0.22        | 0.33        | 0.4          |
| EX-3   | 1.38                | 3.99       | 6.20        | 8.04        | 10.99       | 13.0         |
| EX-3A  | 3.87                | 7.89       | 11.29       | 14.02       | 18.20       | 21.1         |
| EX-4   | 1.93                | 5.62       | 8.68        | 11.29       | 15.41       | 18.2         |
| EX-4A  | 1.33                | 4.20       | 6.63        | 8.65        | 11.88       | 14.1         |
| EX-5   | 1.26                | 4.17       | 6.60        | 8.65        | 11.91       | 14.1         |
| EX-6   | 0.85                | 2.57       | 4.02        | 5.22        | 7.15        | 8.4          |
| EX-7   | 1.59                | 3.74       | 6.48        | 8.68        | 12.03       | 14.2         |
| EX-8   | 0.08                | 0.54       | 1.21        | 1.75        | 2.56        | 3.1          |
| EX-9   | 0.99                | 2.65       | 4.82        | 6.54        | 9.18        | 10.9         |
| EX-10  | 2.92                | 8.10       | 12.49       | 16.17       | 22.00       | 25.9         |
| EX-10A | 0.00                | 1.88       | 4.73        | 7.00        | 10.40       | 12.7         |
| EX-11  | 0.00                | 2.20       | 5.49        | 8.16        | 12.12       | 14.8         |
| EX-12  | 0.11                | 0.86       | 1.50        | 2.00        | 2.77        | 3.3          |
| EX-13  | 0.06                | 1.73       | 3.16        | 4.27        | 5.98        | 7.1          |
| EX-20  | 1.35                | 4.08       | 6.38        | 8.32        | 11.35       | 13.4         |
| EX-20A | 1.54                | 3.84       | 6.81        | 9.21        | 12.80       | 15.2         |
| EX-21  | 0.59                | 1.26       | 1.83        | 2.30        | 3.06        | 3.6          |
| EX-24  | 0.08                | 1.28       | 2.29        | 3.10        | 4.30        | 5.1          |
| EX-25  | 0.00                | 0.57       | 1.43        | 2.12        | 3.16        | 3.8          |
| EX-73  | 1.04                | 2.78       | 4.24        | 5.46        | 7.43        | 8.7          |
| EX-74  | 3.04                | 7.67       | 11.57       | 14.85       | 20.04       | 23.5         |
| EX-75  | 11.11               | 28.88      | 43.58       | 56.16       | 75.80       | 89.3         |
| EX-76  | 1.21                | 2.90       | 4.33        | 5.52        | 7.43        | 8.7          |
| EX-77  | 2.16                | 6.57       | 10.22       | 13.35       | 18.26       | 21.5         |
| EX-78  | 4.91                | 11.72      | 17.43       | 22.28       | 29.89       | 35.0         |
| EX-79  | 2.48                | 6.17       | 9.24        | 11.85       | 15.99       | 18.8         |
| EX-80  | 1.94                | 4.82       | 7.24        | 9.27        | 12.52       | 14.7         |
| EX-81  | 2.47                | 7.49       | 11.69       | 15.22       | 20.87       | 24.6         |
| EX-82  | 1.10                | 3.35       | 5.25        | 6.81        | 9.33        | 11.0         |
| EX-88  | 1.30                | 3.96       | 6.17        | 8.04        | 11.02       | 13.0         |

**Existing Conditions Design Point Peak Flow Rate Summary**

| Design Point | MDDP     |          |           |           |           |            | MDDP Amendment |          |           |           |           |            | % Difference |       |      |      |      |      |
|--------------|----------|----------|-----------|-----------|-----------|------------|----------------|----------|-----------|-----------|-----------|------------|--------------|-------|------|------|------|------|
|              | Q2 (cfs) | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) | Q2 (cfs)       | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) | Q2           | Q5    | Q10  | Q25  | Q50  | Q100 |
| DP-73        | 225.9    | 380.7    | 618       | 957       | 1260.4    | 1582.3     | 171.2          | 503.09   | 791.79    | 1033.04   | 1414.41   | 1672.0     | -32%         | 24%   | 22%  | 7%   | 11%  | 5%   |
| DP-71        | 229.3    | 388.9    | 629.7     | 978.8     | 1277.3    | 1637.9     | 175            | 518.37   | 818.24    | 1068.91   | 1466.2    | 1734.9     | -31%         | 25%   | 23%  | 8%   | 13%  | 6%   |
| DP-69        | 253      | 434.8    | 707.7     | 1100      | 1453.3    | 1870.4     | 189.69         | 579.88   | 923.83    | 1213.68   | 1675.53   | 1988.4     | -33%         | 25%   | 23%  | 9%   | 13%  | 6%   |
| DP-63        | 251.4    | 430.7    | 713.1     | 1113.2    | 1496.2    | 1911.5     | 175.18         | 557.4    | 899.71    | 1192.36   | 1661.58   | 1980.7     | -44%         | 23%   | 21%  | 7%   | 10%  | 3%   |
| DP-10        | 36.5     | 56       | 106.4     | 162.9     | 220.6     | 287.2      | 32.32          | 93.36    | 146.19    | 189.33    | 255.2     | 300.1      | -13%         | 40%   | 27%  | 14%  | 14%  | 4%   |
| DP-9A        | 55.3     | 94.3     | 150.3     | 227.7     | 299.5     | 380.5      | 31.89          | 101.87   | 173.68    | 232.21    | 321.39    | 381.1      | -73%         | 7%    | 13%  | 2%   | 7%   | 0%   |
| DP-9         | 52.8     | 88.8     | 142.1     | 214.2     | 281       | 351.4      | 28.73          | 93.68    | 160.49    | 215.19    | 297.14    | 351.7      | -84%         | 5%    | 11%  | 0%   | 5%   | 0%   |
| DP-8A        | 7.7      | 15.2     | 27.1      | 44.2      | 60.5      | 78.4       | 0.56           | 17.3     | 31.43     | 42.65     | 59.34     | 70.5       | -1275%       | 12%   | 14%  | -4%  | -2%  | -11% |
| DP-8         | 24.2     | 45.1     | 77.8      | 124.4     | 169.5     | 220.9      | 1.97           | 50.28    | 115.07    | 167.23    | 245.12    | 297.4      | -1128%       | 10%   | 32%  | 26%  | 31%  | 26%  |
| DP-7         | 32.4     | 57.1     | 97.3      | 156.1     | 213.8     | 277.9      | 22.38          | 82.23    | 143.62    | 194.75    | 273.43    | 326.3      | -45%         | 31%   | 32%  | 20%  | 22%  | 15%  |
| DP-6         | 12.2     | 23.9     | 43.1      | 70.9      | 97        | 125.2      | 7.82           | 24.38    | 46.12     | 63.58     | 89.43     | 106.6      | -56%         | 2%    | 7%   | -12% | -8%  | -17% |
| DP-5         | 0.5      | 1.7      | 4.5       | 9.4       | 14.5      | 20.5       | 1.18           | 9.36     | 20.8      | 29.82     | 42.58     | 50.9       | 58%          | 82%   | 78%  | 68%  | 66%  | 60%  |
| DP-4         | 11.6     | 21.5     | 37.5      | 60.9      | 83.1      | 107.4      | 12.95          | 35.87    | 65.46     | 89.09     | 123.98    | 147.0      | 10%          | 40%   | 43%  | 32%  | 33%  | 27%  |
| DP-3         | 1.1      | 1.8      | 2.8       | 4.3       | 5.6       | 7.1        | 0.0            | 0.69     | 1.71      | 2.52      | 3.71      | 4.5        | -10900%      | -161% | -64% | -71% | -51% | -57% |
| DP-2         | 4.8      | 7.9      | 12.4      | 18.7      | 24.5      | 30.9       | 0.0            | 4.41     | 10.85     | 15.93     | 23.17     | 27.9       | -47900%      | -79%  | -14% | -17% | -6%  | -11% |
| DP-1         | 5        | 8.2      | 13        | 19.6      | 25.7      | 32.2       | 0.0            | 4.88     | 11.82     | 17.63     | 25.97     | 31.5       | -49900%      | -68%  | -10% | -11% | 1%   | -2%  |
| DP-60A       | 247.7    | 430.2    | 707.1     | 1113      | 1496.6    | 1913.5     | 167.91         | 546.35   | 886.79    | 1179      | 1649.04   | 1969.2     | -48%         | 21%   | 20%  | 6%   | 9%   | 3%   |
| DP-56        | 23.2     | 42.5     | 71.9      | 115.6     | 157.4     | 202.9      | 0.35           | 40.19    | 96.37     | 141.51    | 207.98    | 242.9      | -6529%       | -6%   | 25%  | 18%  | 24%  | 16%  |
| DP-53A       | 262.1    | 454      | 763.2     | 1196.5    | 1609.8    | 2061.5     | 182.68         | 602.01   | 983.58    | 1311.23   | 1837.86   | 2197.7     | -43%         | 25%   | 22%  | 9%   | 12%  | 6%   |

**Existing Conditions Design Point Total Runoff Volume Summary**

| Design Point | MDDP       |            |             |             |             |              | MDDP Amendment |            |             |             |             |              | % Difference |       |       |       |      |      |
|--------------|------------|------------|-------------|-------------|-------------|--------------|----------------|------------|-------------|-------------|-------------|--------------|--------------|-------|-------|-------|------|------|
|              | V2 (ac-ft) | V5 (ac-ft) | V10 (ac-ft) | V25 (ac-ft) | V50 (ac-ft) | V100 (ac-ft) | V2 (ac-ft)     | V5 (ac-ft) | V10 (ac-ft) | V25 (ac-ft) | V50 (ac-ft) | V100 (ac-ft) | V2           | V5    | V10   | V25   | V50  | V100 |
| DP-73        | 40.4       | 61.5       | 92.1        | 134.3       | 173.1       | 214.9        | 19.9           | 51.9       | 78.6        | 101.0       | 136.3       | 159.9        | -103%        | -19%  | -17%  | -33%  | -27% | -34% |
| DP-71        | 42.5       | 64.9       | 97.1        | 141.6       | 182.5       | 226.6        | 20.7           | 54.6       | 82.6        | 106.2       | 143.6       | 168.5        | -105%        | -19%  | -18%  | -33%  | -27% | -34% |
| DP-69        | 50.7       | 77.4       | 116.1       | 169.4       | 218.6       | 271.4        | 24.0           | 64.4       | 98.2        | 126.4       | 171.2       | 201.0        | -111%        | -20%  | -18%  | -34%  | -28% | -35% |
| DP-63        | 54.1       | 82.5       | 123.8       | 180.8       | 233.3       | 289.9        | 25.9           | 69.7       | 105.9       | 136.3       | 184.4       | 216.4        | -109%        | -18%  | -17%  | -33%  | -26% | -34% |
| DP-10        | 7.6        | 11.7       | 17.6        | 25.8        | 33.4        | 41.6         | 5.4            | 12.2       | 17.9        | 22.5        | 29.6        | 34.4         | -41%         | 4%    | 1%    | -15%  | -13% | -21% |
| DP-9A        | 9.3        | 14.1       | 21.1        | 30.7        | 39.4        | 48.8         | 3.6            | 9.4        | 15.2        | 20.0        | 27.5        | 32.5         | -159%        | -50%  | -39%  | -53%  | -43% | -50% |
| DP-9         | 8.4        | 12.7       | 19          | 27.6        | 35.5        | 44           | 3.0            | 8.1        | 13.4        | 17.7        | 24.4        | 28.9         | -181%        | -56%  | -42%  | -56%  | -45% | -52% |
| DP-8A        | 1.3        | 2.1        | 3.4         | 5.2         | 7           | 8.9          | 0.1            | 1.7        | 3.2         | 4.3         | 6.0         | 7.1          | -2153%       | -21%  | -8%   | -22%  | -17% | -25% |
| DP-8         | 4.4        | 7          | 11.1        | 16.8        | 22.3        | 28.4         | 0.2            | 4.9        | 10.3        | 14.5        | 21.0        | 25.3         | -2483%       | -43%  | -8%   | -15%  | -6%  | -12% |
| DP-7         | 6.1        | 10         | 15.9        | 24.3        | 32.4        | 41.3         | 3.1            | 10.3       | 17.6        | 23.6        | 32.8        | 39.0         | -99%         | 3%    | 10%   | -3%   | 1%   | -6%  |
| DP-6         | 2.4        | 4          | 6.3         | 9.6         | 12.7        | 16           | 1.0            | 2.7        | 4.8         | 6.5         | 9.2         | 10.9         | -142%        | -51%  | -31%  | -47%  | -38% | -46% |
| DP-5         | 0.2        | 0.4        | 0.8         | 1.4         | 1.9         | 2.6          | 0.1            | 0.5        | 1.2         | 1.7         | 2.6         | 3.1          | -160%        | 26%   | 34%   | 20%   | 26%  | 16%  |
| DP-4         | 2.6        | 4.2        | 6.7         | 10.2        | 13.5        | 17.2         | 1.6            | 3.7        | 6.5         | 8.7         | 12.0        | 14.2         | -64%         | -12%  | -3%   | -17%  | -12% | -21% |
| DP-3         | 0.1        | 0.2        | 0.3         | 0.5         | 0.6         | 0.8          | 0.0            | 0.1        | 0.2         | 0.2         | 0.3         | 0.4          | -9900%       | -231% | -98%  | -123% | -79% | -97% |
| DP-2         | 0.6        | 0.9        | 1.4         | 2.1         | 2.7         | 3.4          | 0.0            | 0.3        | 0.7         | 1.0         | 1.5         | 1.8          | -59900%      | -236% | -108% | -111% | -82% | -88% |
| DP-1         | 0.6        | 0.9        | 1.3         | 1.9         | 2.5         | 3.1          | 0.0            | 0.2        | 0.6         | 0.9         | 1.4         | 1.7          | -59900%      | -263% | -110% | -106% | -83% | -86% |
| DP-60A       | 55.3       | 84.4       | 126.4       | 184.8       | 238.5       | 296.6        | 26.1           | 71.2       | 108.6       | 139.6       | 189.0       | 221.9        | -112%        | -19%  | -16%  | -32%  | -26% | -34% |
| DP-56        | 4          | 6.3        | 9.9         | 14.9        | 19.8        | 25.1         | 0.1            | 4.0        | 8.7         | 12.6        | 18.2        | 22.0         | -6352%       | -58%  | -13%  | -19%  | -9%  | -14% |
| DP-53A       | 63         | 96.4       | 144.7       | 211.8       | 273.9       | 340.9        | 31.6           | 84.1       | 128.0       | 164.5       | 221.9       | 260.5        | -99%         | -15%  | -13%  | -29%  | -23% | -31% |

[TITLE]

::Project Title/Notes

[OPTIONS]

::Option Value  
FLOW\_UNITS CFS  
INFILTRATION HORTON  
FLOW\_ROUTING KINWAVE  
LINK\_OFFSETS DEPTH  
MIN\_SLOPE 0  
ALLOW\_PONDING NO  
SKIP\_STEADY\_STATE NO

START\_DATE 01/01/2005  
START\_TIME 00:00:00  
REPORT\_START\_DATE 01/01/2005  
REPORT\_START\_TIME 00:00:00  
END\_DATE 01/04/2005  
END\_TIME 06:00:00  
SWEEP\_START 01/01  
SWEEP\_END 12/31  
DRY\_DAYS 0  
REPORT\_STEP 00:05:00  
WET\_STEP 00:01:00  
DRY\_STEP 01:00:00  
ROUTING\_STEP 0:00:30

INERTIAL\_DAMPING PARTIAL  
NORMAL\_FLOW\_LIMITED BOTH  
FORCE\_MAIN\_EQUATION H-W  
VARIABLE\_STEP 0.75  
LENGTHENING\_STEP 0  
MIN\_SURFAREA 12.557  
MAX\_TRIALS 8  
HEAD\_TOLERANCE 0.005  
SYS\_FLOW\_TOL 5  
LAT\_FLOW\_TOL 5  
MINIMUM\_STEP 0.5  
THREADS 1

[FILES]

::Interfacing Files  
USE INFLOWS "2518804 CUHP SWMM - EX Conditions 24hr Storm.txt"

[EVAPORATION]

::Data Source Parameters  
::-----  
CONSTANT 0.0  
DRY\_ONLY NO

[JUNCTIONS]

::Name Elevation MaxDepth InitDepth SurDepth Aponded  
::-----

|        |     |   |   |   |   |
|--------|-----|---|---|---|---|
| EX-3   | 210 | 0 | 0 | 0 | 0 |
| EX-4   | 260 | 0 | 0 | 0 | 0 |
| EX-10  | 138 | 0 | 0 | 0 | 0 |
| EX-20  | 96  | 0 | 0 | 0 | 0 |
| EX-79  | 522 | 0 | 0 | 0 | 0 |
| EX-80  | 512 | 0 | 0 | 0 | 0 |
| EX-81  | 492 | 0 | 0 | 0 | 0 |
| EX-82  | 522 | 0 | 0 | 0 | 0 |
| DP-10  | 74  | 0 | 0 | 0 | 0 |
| DP-56  | 72  | 0 | 0 | 0 | 0 |
| DP-60A | 22  | 0 | 0 | 0 | 0 |
| DP-63  | 96  | 0 | 0 | 0 | 0 |
| DP-69  | 192 | 0 | 0 | 0 | 0 |
| DP-71  | 258 | 0 | 0 | 0 | 0 |
| DP-73  | 300 | 0 | 0 | 0 | 0 |
| EX-74  | 457 | 0 | 0 | 0 | 0 |
| EX-75  | 392 | 0 | 0 | 0 | 0 |
| EX-78  | 422 | 0 | 0 | 0 | 0 |
| DP-8A  | 104 | 0 | 0 | 0 | 0 |
| DP-9   | 22  | 0 | 0 | 0 | 0 |
| EX-76  | 392 | 0 | 0 | 0 | 0 |
| EX-73  | 392 | 0 | 0 | 0 | 0 |
| EX-88  | 300 | 0 | 0 | 0 | 0 |
| EX-77  | 300 | 0 | 0 | 0 | 0 |
| EX-6   | 258 | 0 | 0 | 0 | 0 |
| EX-20A | 22  | 0 | 0 | 0 | 0 |
| EX-21  | 0   | 0 | 0 | 0 | 0 |
| EX-3A  | 74  | 0 | 0 | 0 | 0 |
| EX-0   | 0   | 0 | 0 | 0 | 0 |
| EX-1   | 0   | 0 | 0 | 0 | 0 |
| EX-2   | 0   | 0 | 0 | 0 | 0 |
| EX-4A  | 96  | 0 | 0 | 0 | 0 |
| EX-10A | 0   | 0 | 0 | 0 | 0 |
| EX-9   | 0   | 0 | 0 | 0 | 0 |
| EX-8   | 0   | 0 | 0 | 0 | 0 |
| EX-7   | 0   | 0 | 0 | 0 | 0 |
| EX-5   | 192 | 0 | 0 | 0 | 0 |
| EX-12  | 0   | 0 | 0 | 0 | 0 |
| EX-11  | 72  | 0 | 0 | 0 | 0 |
| EX-13  | 104 | 0 | 0 | 0 | 0 |
| EX-24  | 22  | 0 | 0 | 0 | 0 |
| EX-25  | 0   | 0 | 0 | 0 | 0 |

[OUTFALLS]

| ;;Name | Elevation | Type | Stage Data | Gated | Route To |
|--------|-----------|------|------------|-------|----------|
| DP-53A | 0         | FREE | NO         |       |          |
| DP-9A  | 0         | FREE | NO         |       |          |
| DP-1   | 0         | FREE | NO         |       |          |
| DP-2   | 0         | FREE | NO         |       |          |
| DP-4   | 0         | FREE | NO         |       |          |
| DP-5   | 0         | FREE | NO         |       |          |
| DP-6   | 0         | FREE | NO         |       |          |

|      |   |      |    |
|------|---|------|----|
| DP-7 | 0 | FREE | NO |
| DP-3 | 0 | FREE | NO |
| DP-8 | 0 | FREE | NO |

[CONDUITS]

| ::Name | From Node | To Node | Length | Roughness | InOffset | OutOffset | InitFlow | MaxFlow |
|--------|-----------|---------|--------|-----------|----------|-----------|----------|---------|
| RT-4   | EX-74     | EX-75   | 2695   | 0.05      | 0        | 0         | 0        | 0       |
| RT-1   | EX-81     | EX-75   | 3975   | 0.05      | 0        | 0         | 0        | 0       |
| RT-3   | EX-82     | EX-74   | 2360   | 0.05      | 0        | 0         | 0        | 0       |
| RT-2   | EX-80     | EX-75   | 4570   | 0.05      | 0        | 0         | 0        | 0       |
| RT-6   | EX-79     | EX-78   | 3030   | 0.05      | 0        | 0         | 0        | 0       |
| RT-5   | EX-75     | DP-73   | 4100   | 0.05      | 0        | 0         | 0        | 0       |
| RT-7   | EX-78     | DP-73   | 6145   | 0.05      | 0        | 0         | 0        | 0       |
| RT-10  | EX-4      | DP-69   | 3165   | 0.05      | 0        | 0         | 0        | 0       |
| RT-9   | DP-71     | DP-69   | 3565   | 0.05      | 0        | 0         | 0        | 0       |
| RT-14  | EX-3      | DP-10   | 6365   | 0.05      | 0        | 0         | 0        | 0       |
| RT-13  | DP-60A    | DP-53A  | 1480   | 0.05      | 0        | 0         | 0        | 0       |
| RT-12  | DP-63     | DP-60A  | 4375   | 0.05      | 0        | 0         | 0        | 0       |
| RT-18  | EX-20     | DP-9    | 3400   | 0.05      | 0        | 0         | 0        | 0       |
| RT-19  | DP-9      | DP-9A   | 1670   | 0.05      | 0        | 0         | 0        | 0       |
| RT-11  | DP-69     | DP-63   | 6400   | 0.05      | 0        | 0         | 0        | 0       |
| RT-15  | DP-10     | DP-53A  | 3130   | 0.05      | 0        | 0         | 0        | 0       |
| RT-8   | DP-73     | DP-71   | 2160   | 0.05      | 0        | 0         | 0        | 0       |
| RT-16  | EX-10     | DP-7    | 5575   | 0.05      | 0        | 0         | 0        | 0       |
| RT-17  | DP-8A     | DP-56   | 2675   | 0.05      | 0        | 0         | 0        | 0       |
| RT-17A | DP-56     | DP-8    | 1300   | 0.05      | 0        | 0         | 0        | 0       |
| 32     | EX-76     | EX-75   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 33     | EX-73     | EX-75   | 1      | .05       | 0        | 0         | 0        | 0       |
| 34     | EX-88     | DP-73   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 35     | EX-77     | DP-73   | 1      | .05       | 0        | 0         | 0        | 0       |
| 36     | EX-6      | DP-71   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 37     | EX-20A    | DP-9    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 38     | EX-21     | DP-9A   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 39     | EX-3A     | DP-10   | 1      | .05       | 0        | 0         | 0        | 0       |
| 40     | EX-0      | DP-1    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 41     | EX-1      | DP-2    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 42     | EX-2      | DP-3    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 43     | EX-4A     | DP-63   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 44     | EX-10A    | DP-7    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 45     | EX-9      | DP-6    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 46     | EX-8      | DP-5    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 47     | EX-7      | DP-4    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 48     | EX-5      | DP-69   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 49     | EX-11     | DP-56   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 50     | EX-13     | DP-8A   | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 51     | EX-12     | DP-8    | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 52     | EX-24     | DP-60A  | 1      | 0.05      | 0        | 0         | 0        | 0       |
| 53     | EX-25     | DP-53A  | 400    | 0.05      | 0        | 0         | 0        | 0       |

[XSECTIONS]

| ::Link | Shape | Geom1 | Geom2 | Geom3 | Geom4 | Barrels | Culvert |
|--------|-------|-------|-------|-------|-------|---------|---------|
| -----  |       |       |       |       |       |         |         |
| ::     |       |       |       |       |       |         |         |

|        |             |    |    |    |    |   |
|--------|-------------|----|----|----|----|---|
| RT-4   | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-1   | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-3   | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-2   | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-6   | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-5   | TRAPEZOIDAL | 20 | 10 | 6  | 6  | 1 |
| RT-7   | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-10  | TRAPEZOIDAL | 20 | 6  | 6  | 6  | 1 |
| RT-9   | TRAPEZOIDAL | 20 | 30 | 6  | 6  | 1 |
| RT-14  | TRAPEZOIDAL | 20 | 6  | 4  | 4  | 1 |
| RT-13  | TRAPEZOIDAL | 20 | 40 | 6  | 6  | 1 |
| RT-12  | TRAPEZOIDAL | 20 | 40 | 6  | 6  | 1 |
| RT-18  | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-19  | TRAPEZOIDAL | 20 | 6  | 6  | 6  | 1 |
| RT-11  | TRAPEZOIDAL | 20 | 40 | 4  | 4  | 1 |
| RT-15  | TRAPEZOIDAL | 20 | 8  | 4  | 4  | 1 |
| RT-8   | TRAPEZOIDAL | 20 | 15 | 6  | 6  | 1 |
| RT-16  | TRAPEZOIDAL | 20 | 6  | 10 | 10 | 1 |
| RT-17  | TRAPEZOIDAL | 20 | 6  | 6  | 6  | 1 |
| RT-17A | TRAPEZOIDAL | 20 | 6  | 6  | 6  | 1 |
| 32     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 33     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 34     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 35     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 36     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 37     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 38     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 39     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 40     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 41     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 42     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 43     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 44     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 45     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 46     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 47     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 48     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 49     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 50     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 51     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 52     | DUMMY       | 0  | 0  | 0  | 0  | 1 |
| 53     | DUMMY       | 0  | 0  | 0  | 0  | 1 |

[REPORT]

;;Reporting Options

INPUT NO

CONTROLS NO

SUBCATCHMENTS ALL

NODES ALL

LINKS ALL

[TAGS]

[MAP]

DIMENSIONS -2500.000 0.000 12500.000 10000.000

Units None

[COORDINATES]

| ::Node | X-Coord  | Y-Coord  |
|--------|----------|----------|
| EX-3   | 2152.842 | 3756.835 |
| EX-4   | 2571.814 | 4278.574 |
| EX-10  | 3957.520 | 3914.976 |
| EX-20  | 1604.854 | 4007.997 |
| EX-79  | 4085.424 | 7724.977 |
| EX-80  | 3542.799 | 7709.473 |
| EX-81  | 2988.547 | 7728.853 |
| EX-82  | 2531.192 | 7717.225 |
| DP-10  | 1741.775 | 1729.169 |
| DP-56  | 4701.691 | 2139.818 |
| DP-60A | 1895.925 | 1029.565 |
| DP-63  | 2235.846 | 2136.283 |
| DP-69  | 2781.300 | 3511.776 |
| DP-71  | 3318.849 | 4464.344 |
| DP-73  | 3437.426 | 5140.233 |
| EX-74  | 2674.581 | 7037.464 |
| EX-75  | 3322.017 | 6408.826 |
| EX-78  | 3840.587 | 6895.172 |
| DP-8A  | 4697.815 | 3008.018 |
| DP-9   | 1457.570 | 2891.741 |
| EX-76  | 3525.759 | 6956.775 |
| EX-73  | 2765.778 | 6674.792 |
| EX-88  | 3047.762 | 5818.523 |
| EX-77  | 3900.591 | 5866.667 |
| EX-6   | 3597.974 | 4972.571 |
| EX-20A | 1273.326 | 3569.530 |
| EX-21  | 1084.191 | 2819.865 |
| EX-3A  | 1806.345 | 2589.463 |
| EX-0   | 1146.090 | 2286.847 |
| EX-1   | 1493.411 | 2403.767 |
| EX-2   | 1465.901 | 1931.593 |
| EX-4A  | 2346.241 | 3097.356 |
| EX-10A | 3553.270 | 2571.215 |
| EX-9   | 3388.206 | 3344.952 |
| EX-8   | 3144.049 | 2488.683 |
| EX-7   | 2824.238 | 3203.960 |
| EX-5   | 2989.302 | 4355.967 |
| EX-12  | 4302.934 | 1931.593 |
| EX-11  | 4251.352 | 3327.758 |
| EX-13  | 4509.264 | 3819.510 |
| EX-24  | 1916.387 | 1518.934 |
| EX-25  | 1710.057 | 1199.123 |
| DP-53A | 1469.048 | 685.692  |
| DP-9A  | 1023.470 | 2411.130 |
| DP-1   | 1128.119 | 2101.059 |
| DP-2   | 1403.308 | 2116.563 |

|      |          |          |
|------|----------|----------|
| DP-4 | 2616.461 | 2151.446 |
| DP-5 | 3000.175 | 2135.942 |
| DP-6 | 3317.998 | 2147.570 |
| DP-7 | 3686.207 | 2151.446 |
| DP-3 | 1480.825 | 1725.098 |
| DP-8 | 4399.371 | 1721.222 |

[VERTICES]

| ::Link  | X-Coord | Y-Coord |
|---------|---------|---------|
| ::----- |         |         |



SAND CREEK 2021 MDDP AMENDMENT  
EXISTING CONDITIONS  
2-YR 100YR TYPE II STORM

- WARNING 04: minimum elevation drop used for Conduit 32
- WARNING 04: minimum elevation drop used for Conduit 33
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 35
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 41
- WARNING 04: minimum elevation drop used for Conduit 42
- WARNING 04: minimum elevation drop used for Conduit 43
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 49
- WARNING 04: minimum elevation drop used for Conduit 50
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 52
- WARNING 04: minimum elevation drop used for Conduit 53

\*\*\*\*\*

NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.

\*\*\*\*\*

\*\*\*\*\*

Analysis Options

\*\*\*\*\*

- Flow Units ..... CFS
- Process Models:
  - Rainfall/Runoff ..... NO
  - RDII ..... NO
  - Snowmelt ..... NO
  - Groundwater ..... NO
  - Flow Routing ..... YES
  - Ponding Allowed ..... NO
  - Water Quality ..... NO
- Flow Routing Method ..... KINWAVE
- Starting Date ..... 01/01/2005 00:00:00
- Ending Date ..... 01/04/2005 06:00:00
- Antecedent Dry Days ..... 0.0
- Report Time Step ..... 00:05:00
- Routing Time Step ..... 30.00 sec

```

*****      Volume      Volume
Flow Routing Continuity  acre-feet  10^6 gal
*****      -----      -----
Dry Weather Inflow .....    0.000    0.000
Wet Weather Inflow .....    0.000    0.000
Groundwater Inflow .....    0.000    0.000
RDII Inflow .....          0.000    0.000
External Inflow .....      39.199    12.774
External Outflow .....     41.031    13.371
Flooding Loss .....         0.000    0.000
Evaporation Loss .....     0.000    0.000
Exfiltration Loss .....     0.000    0.000
Initial Stored Volume ....    0.000    0.000
Final Stored Volume .....    0.000    0.000
Continuity Error (%) .....  -4.672

```

```

*****
Highest Flow Instability Indexes
*****
All links are stable.

```

```

*****
Routing Time Step Summary
*****
Minimum Time Step      : 30.00 sec
Average Time Step      : 30.00 sec
Maximum Time Step      : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging  : 0.00

```

```

*****
Node Depth Summary
*****

```

| Node   | Type     | Average Depth | Maximum Depth | Maximum HGL | Time of Max Occurrence | Reported Max Depth |
|--------|----------|---------------|---------------|-------------|------------------------|--------------------|
|        |          | Feet          | Feet          | Feet        | days hr:min            | Feet               |
| EX-3   | JUNCTION | 0.02          | 0.68          | 210.68      | 0 12:25                | 0.68               |
| EX-4   | JUNCTION | 0.02          | 0.79          | 260.79      | 0 12:25                | 0.78               |
| EX-10  | JUNCTION | 0.02          | 0.74          | 138.74      | 0 12:30                | 0.74               |
| EX-20  | JUNCTION | 0.01          | 0.69          | 96.69       | 0 12:25                | 0.69               |
| EX-79  | JUNCTION | 0.02          | 0.82          | 522.82      | 0 12:20                | 0.81               |
| EX-80  | JUNCTION | 0.02          | 0.68          | 512.68      | 0 12:25                | 0.68               |
| EX-81  | JUNCTION | 0.02          | 0.73          | 492.73      | 0 12:30                | 0.73               |
| EX-82  | JUNCTION | 0.01          | 0.62          | 522.62      | 0 12:20                | 0.61               |
| DP-10  | JUNCTION | 0.04          | 0.84          | 74.84       | 0 12:38                | 0.84               |
| DP-56  | JUNCTION | 0.00          | 0.09          | 72.09       | 0 13:10                | 0.09               |
| DP-60A | JUNCTION | 0.04          | 1.05          | 23.05       | 0 13:48                | 1.05               |
| DP-63  | JUNCTION | 0.04          | 1.07          | 97.07       | 0 13:33                | 1.07               |
| DP-69  | JUNCTION | 0.04          | 1.16          | 193.16      | 0 13:11                | 1.16               |
| DP-71  | JUNCTION | 0.05          | 1.56          | 259.56      | 0 13:00                | 1.56               |

|        |          |      |      |        |         |      |
|--------|----------|------|------|--------|---------|------|
| DP-73  | JUNCTION | 0.05 | 1.57 | 301.57 | 0 12:53 | 1.57 |
| EX-74  | JUNCTION | 0.03 | 0.88 | 457.88 | 0 12:28 | 0.87 |
| EX-75  | JUNCTION | 0.04 | 1.36 | 393.36 | 0 12:42 | 1.35 |
| EX-78  | JUNCTION | 0.03 | 1.12 | 423.12 | 0 12:31 | 1.12 |
| DP-8A  | JUNCTION | 0.01 | 0.12 | 104.12 | 0 12:25 | 0.12 |
| DP-9   | JUNCTION | 0.04 | 0.96 | 22.96  | 0 12:36 | 0.96 |
| EX-76  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-73  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-88  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-77  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-6   | JUNCTION | 0.00 | 0.00 | 258.00 | 0 00:00 | 0.00 |
| EX-20A | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-21  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-3A  | JUNCTION | 0.00 | 0.00 | 74.00  | 0 00:00 | 0.00 |
| EX-0   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-1   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-2   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-4A  | JUNCTION | 0.00 | 0.00 | 96.00  | 0 00:00 | 0.00 |
| EX-10A | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-9   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-8   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-7   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-5   | JUNCTION | 0.00 | 0.00 | 192.00 | 0 00:00 | 0.00 |
| EX-12  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-11  | JUNCTION | 0.00 | 0.00 | 72.00  | 0 00:00 | 0.00 |
| EX-13  | JUNCTION | 0.00 | 0.00 | 104.00 | 0 00:00 | 0.00 |
| EX-24  | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-25  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-53A | OUTFALL  | 0.07 | 1.05 | 1.05   | 0 13:53 | 1.05 |
| DP-9A  | OUTFALL  | 0.03 | 0.95 | 0.95   | 0 12:47 | 0.94 |
| DP-1   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-2   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-4   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-5   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-6   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-7   | OUTFALL  | 0.02 | 0.66 | 0.66   | 0 12:59 | 0.66 |
| DP-3   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-8   | OUTFALL  | 0.00 | 0.06 | 0.06   | 0 13:51 | 0.06 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum       |  | Lateral<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Total<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Flow<br>Balance<br>Error<br>Percent |       |
|-------|----------|---------------|--|--|--|-------------------------------------|-------|
|       |          | Inflow<br>CFS | Time of Max<br>Occurrence<br>days hr:min |  |  |                                     |       |
| EX-3  | JUNCTION | 16.58         | 16.58                                    | 0 12:25  | 0.449  | 0.449                               | 0.000 |
| EX-4  | JUNCTION | 24.48         | 24.48                                    | 0 12:25  | 0.629  | 0.629                               | 0.000 |
| EX-10 | JUNCTION | 28.19         | 28.19                                    | 0 12:30  | 0.95   | 0.95                                | 0.000 |
| EX-20 | JUNCTION | 22.91         | 22.91                                    | 0 12:25  | 0.439  | 0.439                               | 0.000 |
| EX-79 | JUNCTION | 40.26         | 40.26                                    | 0 12:20  | 0.807  | 0.807                               | 0.000 |
| EX-80 | JUNCTION | 24.46         | 24.46                                    | 0 12:25  | 0.631  | 0.631                               | 0.000 |
| EX-81 | JUNCTION | 28.03         | 28.03                                    | 0 12:30  | 0.805  | 0.805                               | 0.000 |

|        |          |       |        |   |       |        |        |           |
|--------|----------|-------|--------|---|-------|--------|--------|-----------|
| EX-82  | JUNCTION | 20.51 | 20.51  | 0 | 12:20 | 0.36   | 0.36   | 0.000     |
| DP-10  | JUNCTION | 0.00  | 32.32  | 0 | 12:38 | 0      | 1.76   | 0.000     |
| DP-56  | JUNCTION | 0.00  | 0.35   | 0 | 13:10 | 0      | 0.0202 | 0.000     |
| DP-60A | JUNCTION | 0.00  | 167.91 | 0 | 13:48 | 0      | 8.51   | 0.000     |
| DP-63  | JUNCTION | 0.00  | 175.18 | 0 | 13:33 | 0      | 8.43   | 0.000     |
| DP-69  | JUNCTION | 0.00  | 189.69 | 0 | 13:10 | 0      | 7.83   | 0.000     |
| DP-71  | JUNCTION | 0.00  | 175.00 | 0 | 12:59 | 0      | 6.75   | 0.000     |
| DP-73  | JUNCTION | 0.00  | 171.20 | 0 | 12:53 | 0      | 6.47   | 0.000     |
| EX-74  | JUNCTION | 30.47 | 40.00  | 0 | 12:28 | 0.615  | 0.99   | 0.000     |
| EX-75  | JUNCTION | 12.76 | 104.13 | 0 | 12:42 | 0.408  | 3.62   | -0.000    |
| EX-78  | JUNCTION | 37.10 | 62.60  | 0 | 12:31 | 0.801  | 1.6    | 0.000     |
| DP-8A  | JUNCTION | 0.00  | 0.56   | 0 | 12:25 | 0      | 0.0188 | 0.000     |
| DP-9   | JUNCTION | 0.00  | 28.73  | 0 | 12:36 | 0      | 0.975  | 0.000     |
| EX-76  | JUNCTION | 11.84 | 11.84  | 0 | 12:25 | 0.393  | 0.393  | 0.000     |
| EX-73  | JUNCTION | 12.58 | 12.58  | 0 | 12:25 | 0.338  | 0.338  | 0.000     |
| EX-88  | JUNCTION | 16.59 | 16.59  | 0 | 12:25 | 0.425  | 0.425  | 0.000     |
| EX-77  | JUNCTION | 19.74 | 19.74  | 0 | 12:35 | 0.705  | 0.705  | 0.000     |
| EX-6   | JUNCTION | 10.10 | 10.10  | 0 | 12:25 | 0.276  | 0.276  | 0.000     |
| EX-20A | JUNCTION | 13.87 | 13.87  | 0 | 12:25 | 0.501  | 0.501  | 0.000     |
| EX-21  | JUNCTION | 6.72  | 6.72   | 0 | 12:20 | 0.193  | 0.193  | 0.000     |
| EX-3A  | JUNCTION | 31.40 | 31.40  | 0 | 12:20 | 1.26   | 1.26   | 0.000     |
| EX-0   | JUNCTION | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| EX-1   | JUNCTION | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| EX-2   | JUNCTION | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| EX-4A  | JUNCTION | 10.14 | 10.14  | 0 | 12:35 | 0.433  | 0.433  | 0.000     |
| EX-10A | JUNCTION | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| EX-9   | JUNCTION | 7.82  | 7.82   | 0 | 12:25 | 0.323  | 0.323  | 0.000     |
| EX-8   | JUNCTION | 1.18  | 1.18   | 0 | 12:20 | 0.0251 | 0.0251 | 0.000     |
| EX-7   | JUNCTION | 12.95 | 12.95  | 0 | 12:25 | 0.518  | 0.518  | 0.000     |
| EX-5   | JUNCTION | 14.15 | 14.15  | 0 | 12:30 | 0.409  | 0.409  | 0.000     |
| EX-12  | JUNCTION | 1.97  | 1.97   | 0 | 12:15 | 0.0366 | 0.0366 | 0.000     |
| EX-11  | JUNCTION | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| EX-13  | JUNCTION | 0.56  | 0.56   | 0 | 12:25 | 0.0188 | 0.0188 | 0.000     |
| EX-24  | JUNCTION | 0.95  | 0.95   | 0 | 12:20 | 0.0276 | 0.0276 | 0.000     |
| EX-25  | JUNCTION | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| DP-53A | OUTFALL  | 0.00  | 182.68 | 0 | 13:52 | 0      | 10.3   | 0.000     |
| DP-9A  | OUTFALL  | 0.00  | 31.89  | 0 | 12:46 | 0      | 1.17   | 0.000     |
| DP-1   | OUTFALL  | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| DP-2   | OUTFALL  | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| DP-4   | OUTFALL  | 0.00  | 12.95  | 0 | 12:25 | 0      | 0.518  | 0.000     |
| DP-5   | OUTFALL  | 0.00  | 1.18   | 0 | 12:20 | 0      | 0.0251 | 0.000     |
| DP-6   | OUTFALL  | 0.00  | 7.82   | 0 | 12:25 | 0      | 0.323  | 0.000     |
| DP-7   | OUTFALL  | 0.00  | 22.38  | 0 | 12:59 | 0      | 1      | 0.000     |
| DP-3   | OUTFALL  | 0.00  | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| DP-8   | OUTFALL  | 0.00  | 1.97   | 0 | 12:15 | 0      | 0.0555 | 0.000     |

\*\*\*\*\*

Node Flooding Summary

\*\*\*\*\*

No nodes were flooded.

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| DP-53A       | 46.55             | 10.51           | 182.68          | 10.277                   |
| DP-9A        | 30.10             | 1.85            | 31.89           | 1.167                    |
| DP-1         | 0.00              | 0.00            | 0.00            | 0.000                    |
| DP-2         | 0.00              | 0.00            | 0.00            | 0.000                    |
| DP-4         | 31.22             | 0.79            | 12.95           | 0.518                    |
| DP-5         | 27.68             | 0.04            | 1.18            | 0.025                    |
| DP-6         | 31.32             | 0.49            | 7.82            | 0.323                    |
| DP-7         | 8.99              | 5.32            | 22.38           | 1.003                    |
| DP-3         | 0.00              | 0.00            | 0.00            | 0.000                    |
| DP-8         | 28.18             | 0.09            | 1.97            | 0.055                    |
| System       | 20.40             | 19.09           | 210.85          | 13.370                   |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow <br>CFS | Time of Occurrence<br>days hr:min | Maximum  Veloc <br>ft/sec | Max/ Full Flow | Max/ Full Depth |
|--------|---------|-----------------------|-----------------------------------|---------------------------|----------------|-----------------|
| RT-4   | CONDUIT | 36.75                 | 0 12:40                           | 3.23                      | 0.00           | 0.04            |
| RT-1   | CONDUIT | 23.44                 | 0 12:50                           | 2.97                      | 0.00           | 0.03            |
| RT-3   | CONDUIT | 16.88                 | 0 12:35                           | 2.80                      | 0.00           | 0.03            |
| RT-2   | CONDUIT | 18.48                 | 0 12:48                           | 2.90                      | 0.00           | 0.03            |
| RT-6   | CONDUIT | 34.05                 | 0 12:35                           | 3.59                      | 0.00           | 0.04            |
| RT-5   | CONDUIT | 98.66                 | 0 12:56                           | 4.36                      | 0.00           | 0.07            |
| RT-7   | CONDUIT | 47.85                 | 0 12:55                           | 3.58                      | 0.00           | 0.05            |
| RT-10  | CONDUIT | 20.95                 | 0 12:43                           | 2.97                      | 0.00           | 0.04            |
| RT-9   | CONDUIT | 169.23                | 0 13:11                           | 4.07                      | 0.00           | 0.06            |
| RT-14  | CONDUIT | 11.77                 | 0 12:58                           | 2.86                      | 0.00           | 0.03            |
| RT-13  | CONDUIT | 167.31                | 0 13:53                           | 3.45                      | 0.00           | 0.05            |
| RT-12  | CONDUIT | 167.73                | 0 13:48                           | 3.70                      | 0.00           | 0.05            |
| RT-18  | CONDUIT | 17.45                 | 0 12:41                           | 2.99                      | 0.00           | 0.03            |
| RT-19  | CONDUIT | 27.73                 | 0 12:47                           | 2.59                      | 0.00           | 0.05            |
| RT-11  | CONDUIT | 170.01                | 0 13:33                           | 3.79                      | 0.00           | 0.05            |
| RT-15  | CONDUIT | 32.10                 | 0 12:50                           | 3.45                      | 0.00           | 0.04            |
| RT-8   | CONDUIT | 169.61                | 0 13:00                           | 4.52                      | 0.00           | 0.08            |
| RT-16  | CONDUIT | 22.38                 | 0 12:59                           | 2.97                      | 0.00           | 0.03            |
| RT-17  | CONDUIT | 0.35                  | 0 13:10                           | 0.73                      | 0.00           | 0.00            |
| RT-17A | CONDUIT | 0.35                  | 0 13:51                           | 1.06                      | 0.00           | 0.00            |
| 32     | DUMMY   | 11.84                 | 0 12:25                           |                           |                |                 |
| 33     | DUMMY   | 12.58                 | 0 12:25                           |                           |                |                 |
| 34     | DUMMY   | 16.59                 | 0 12:25                           |                           |                |                 |
| 35     | DUMMY   | 19.74                 | 0 12:35                           |                           |                |                 |
| 36     | DUMMY   | 10.10                 | 0 12:25                           |                           |                |                 |
| 37     | DUMMY   | 13.87                 | 0 12:25                           |                           |                |                 |
| 38     | DUMMY   | 6.72                  | 0 12:20                           |                           |                |                 |
| 39     | DUMMY   | 31.40                 | 0 12:20                           |                           |                |                 |

|    |       |       |         |
|----|-------|-------|---------|
| 40 | DUMMY | 0.00  | 0 00:00 |
| 41 | DUMMY | 0.00  | 0 00:00 |
| 42 | DUMMY | 0.00  | 0 00:00 |
| 43 | DUMMY | 10.14 | 0 12:35 |
| 44 | DUMMY | 0.00  | 0 00:00 |
| 45 | DUMMY | 7.82  | 0 12:25 |
| 46 | DUMMY | 1.18  | 0 12:20 |
| 47 | DUMMY | 12.95 | 0 12:25 |
| 48 | DUMMY | 14.15 | 0 12:30 |
| 49 | DUMMY | 0.00  | 0 00:00 |
| 50 | DUMMY | 0.56  | 0 12:25 |
| 51 | DUMMY | 1.97  | 0 12:15 |
| 52 | DUMMY | 0.95  | 0 12:20 |
| 53 | DUMMY | 0.00  | 0 00:00 |

\*\*\*\*\*

Conduit Surcharge Summary

\*\*\*\*\*

No conduits were surcharged.

Analysis begun on: Thu Sep 02 14:55:57 2021

Analysis ended on: Thu Sep 02 14:55:58 2021

Total elapsed time: 00:00:01

SAND CREEK 2021 MDDP AMENDMENT  
EXISTING CONDITIONS  
5-YR 100YR TYPE II STORM

- WARNING 04: minimum elevation drop used for Conduit 32
- WARNING 04: minimum elevation drop used for Conduit 33
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 35
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 41
- WARNING 04: minimum elevation drop used for Conduit 42
- WARNING 04: minimum elevation drop used for Conduit 43
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 49
- WARNING 04: minimum elevation drop used for Conduit 50
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 52
- WARNING 04: minimum elevation drop used for Conduit 53

\*\*\*\*\*

NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.

\*\*\*\*\*

\*\*\*\*\*

Analysis Options

\*\*\*\*\*

- Flow Units ..... CFS
- Process Models:
- Rainfall/Runoff ..... NO
- RDII ..... NO
- Snowmelt ..... NO
- Groundwater ..... NO
- Flow Routing ..... YES
- Ponding Allowed ..... NO
- Water Quality ..... NO
- Flow Routing Method ..... KINWAVE
- Starting Date ..... 01/01/2005 00:00:00
- Ending Date ..... 01/04/2005 06:00:00
- Antecedent Dry Days ..... 0.0
- Report Time Step ..... 00:05:00
- Routing Time Step ..... 30.00 sec

```

*****      Volume      Volume
Flow Routing Continuity  acre-feet  10^6 gal
*****      -----      -----
Dry Weather Inflow .....    0.000    0.000
Wet Weather Inflow .....    0.000    0.000
Groundwater Inflow .....    0.000    0.000
RDII Inflow .....          0.000    0.000
External Inflow .....      112.441    36.641
External Outflow .....     116.156    37.851
Flooding Loss .....         0.000    0.000
Evaporation Loss .....      0.000    0.000
Exfiltration Loss .....     0.000    0.000
Initial Stored Volume ....    0.000    0.000
Final Stored Volume .....    0.000    0.000
Continuity Error (%) .....  -3.303

```

```

*****
Highest Flow Instability Indexes
*****
All links are stable.

```

```

*****
Routing Time Step Summary
*****
Minimum Time Step      : 30.00 sec
Average Time Step      : 30.00 sec
Maximum Time Step      : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging  : 0.00

```

```

*****
Node Depth Summary
*****

```

| Node   | Type     | Average Depth | Maximum Depth | Maximum HGL | Time of Max Occurrence | Reported Max Depth |
|--------|----------|---------------|---------------|-------------|------------------------|--------------------|
|        |          | Feet          | Feet          | Feet        | days hr:min            | Feet               |
| EX-3   | JUNCTION | 0.03          | 1.19          | 211.19      | 0 12:25                | 1.19               |
| EX-4   | JUNCTION | 0.03          | 1.33          | 261.33      | 0 12:25                | 1.32               |
| EX-10  | JUNCTION | 0.04          | 1.19          | 139.19      | 0 12:30                | 1.19               |
| EX-20  | JUNCTION | 0.02          | 1.16          | 97.16       | 0 12:20                | 1.14               |
| EX-79  | JUNCTION | 0.03          | 1.26          | 523.26      | 0 12:20                | 1.25               |
| EX-80  | JUNCTION | 0.03          | 1.05          | 513.05      | 0 12:25                | 1.05               |
| EX-81  | JUNCTION | 0.03          | 1.22          | 493.22      | 0 12:30                | 1.22               |
| EX-82  | JUNCTION | 0.02          | 1.04          | 523.04      | 0 12:20                | 1.03               |
| DP-10  | JUNCTION | 0.06          | 1.46          | 75.46       | 0 12:36                | 1.46               |
| DP-56  | JUNCTION | 0.02          | 0.80          | 72.80       | 0 12:33                | 0.80               |
| DP-60A | JUNCTION | 0.07          | 2.06          | 24.06       | 0 13:25                | 2.06               |
| DP-63  | JUNCTION | 0.07          | 2.09          | 98.09       | 0 13:14                | 2.09               |
| DP-69  | JUNCTION | 0.06          | 2.18          | 194.18      | 0 12:58                | 2.18               |
| DP-71  | JUNCTION | 0.08          | 2.67          | 260.67      | 0 12:51                | 2.67               |



|        |          |      |      |        |         |      |
|--------|----------|------|------|--------|---------|------|
| DP-73  | JUNCTION | 0.08 | 2.68 | 302.68 | 0 12:47 | 2.68 |
| EX-74  | JUNCTION | 0.04 | 1.40 | 458.40 | 0 12:27 | 1.39 |
| EX-75  | JUNCTION | 0.06 | 2.26 | 394.26 | 0 12:38 | 2.26 |
| EX-78  | JUNCTION | 0.05 | 1.72 | 423.72 | 0 12:28 | 1.71 |
| DP-8A  | JUNCTION | 0.02 | 0.77 | 104.77 | 0 12:25 | 0.77 |
| DP-9   | JUNCTION | 0.05 | 1.68 | 23.68  | 0 12:34 | 1.68 |
| EX-76  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-73  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-88  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-77  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-6   | JUNCTION | 0.00 | 0.00 | 258.00 | 0 00:00 | 0.00 |
| EX-20A | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-21  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-3A  | JUNCTION | 0.00 | 0.00 | 74.00  | 0 00:00 | 0.00 |
| EX-0   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-1   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-2   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-4A  | JUNCTION | 0.00 | 0.00 | 96.00  | 0 00:00 | 0.00 |
| EX-10A | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-9   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-8   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-7   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-5   | JUNCTION | 0.00 | 0.00 | 192.00 | 0 00:00 | 0.00 |
| EX-12  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-11  | JUNCTION | 0.00 | 0.00 | 72.00  | 0 00:00 | 0.00 |
| EX-13  | JUNCTION | 0.00 | 0.00 | 104.00 | 0 00:00 | 0.00 |
| EX-24  | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-25  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-53A | OUTFALL  | 0.10 | 2.05 | 2.05   | 0 13:28 | 2.05 |
| DP-9A  | OUTFALL  | 0.05 | 1.66 | 1.66   | 0 12:40 | 1.66 |
| DP-1   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-2   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-4   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-5   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-6   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-7   | OUTFALL  | 0.03 | 1.11 | 1.11   | 0 12:52 | 1.11 |
| DP-3   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-8   | OUTFALL  | 0.02 | 0.80 | 0.80   | 0 12:37 | 0.79 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum                  |                        | Lateral<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Total<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Flow<br>Balance<br>Error<br>Percent |
|-------|----------|--------------------------|------------------------|--|--|-------------------------------------|
|       |          | Lateral<br>Inflow<br>CFS | Total<br>Inflow<br>CFS |  |  |                                     |
| EX-3  | JUNCTION | 48.44                    | 48.44                  | 1.3  | 1.3  | 0.000                               |
| EX-4  | JUNCTION | 71.69                    | 71.69                  | 1.83   | 1.83   | 0.000                               |
| EX-10 | JUNCTION | 79.81                    | 79.81                  | 2.64   | 2.64   | 0.000                               |
| EX-20 | JUNCTION | 69.92                    | 69.92                  | 1.33   | 1.33   | 0.000                               |
| EX-79 | JUNCTION | 104.12                   | 104.12                 | 2.01   | 2.01   | 0.000                               |
| EX-80 | JUNCTION | 62.55                    | 62.55                  | 1.57   | 1.57   | 0.000                               |
| EX-81 | JUNCTION | 84.86                    | 84.86                  | 2.44   | 2.44   | 0.000                               |

|        |          |       |        |   |       |        |        |        |
|--------|----------|-------|--------|---|-------|--------|--------|--------|
| EX-82  | JUNCTION | 62.03 | 62.03  | 0 | 12:20 | 1.09   | 1.09   | 0.000  |
| DP-10  | JUNCTION | 0.00  | 93.36  | 0 | 12:36 | 0      | 3.98   | 0.000  |
| DP-56  | JUNCTION | 0.00  | 40.19  | 0 | 12:33 | 0      | 1.3    | 0.000  |
| DP-60A | JUNCTION | 0.00  | 546.35 | 0 | 13:25 | 0      | 23.2   | 0.000  |
| DP-63  | JUNCTION | 0.00  | 557.40 | 0 | 13:14 | 0      | 22.7   | 0.000  |
| DP-69  | JUNCTION | 0.00  | 579.88 | 0 | 12:58 | 0      | 21     | 0.000  |
| DP-71  | JUNCTION | 0.00  | 518.37 | 0 | 12:51 | 0      | 17.8   | 0.000  |
| DP-73  | JUNCTION | 0.00  | 503.09 | 0 | 12:47 | 0      | 16.9   | 0.000  |
| EX-74  | JUNCTION | 72.28 | 113.19 | 0 | 12:27 | 1.39   | 2.5    | 0.000  |
| EX-75  | JUNCTION | 30.23 | 300.63 | 0 | 12:38 | 0.922  | 9.41   | -0.000 |
| EX-78  | JUNCTION | 88.40 | 164.33 | 0 | 12:28 | 1.81   | 3.82   | 0.000  |
| DP-8A  | JUNCTION | 0.00  | 17.30  | 0 | 12:25 | 0      | 0.565  | 0.000  |
| DP-9   | JUNCTION | 0.00  | 93.68  | 0 | 12:34 | 0      | 2.65   | 0.000  |
| EX-76  | JUNCTION | 29.53 | 29.53  | 0 | 12:25 | 0.944  | 0.944  | 0.000  |
| EX-73  | JUNCTION | 34.11 | 34.11  | 0 | 12:25 | 0.905  | 0.905  | 0.000  |
| EX-88  | JUNCTION | 50.26 | 50.26  | 0 | 12:25 | 1.29   | 1.29   | 0.000  |
| EX-77  | JUNCTION | 59.73 | 59.73  | 0 | 12:35 | 2.14   | 2.14   | 0.000  |
| EX-6   | JUNCTION | 30.54 | 30.54  | 0 | 12:25 | 0.837  | 0.837  | 0.000  |
| EX-20A | JUNCTION | 40.88 | 40.88  | 0 | 12:25 | 1.25   | 1.25   | 0.000  |
| EX-21  | JUNCTION | 15.25 | 15.25  | 0 | 12:20 | 0.411  | 0.411  | 0.000  |
| EX-3A  | JUNCTION | 77.80 | 77.80  | 0 | 12:25 | 2.57   | 2.57   | 0.000  |
| EX-0   | JUNCTION | 4.88  | 4.88   | 0 | 12:20 | 0.0807 | 0.0807 | 0.000  |
| EX-1   | JUNCTION | 4.41  | 4.41   | 0 | 12:20 | 0.0874 | 0.0874 | 0.000  |
| EX-2   | JUNCTION | 0.69  | 0.69   | 0 | 12:20 | 0.0197 | 0.0197 | 0.000  |
| EX-4A  | JUNCTION | 32.14 | 32.14  | 0 | 12:35 | 1.37   | 1.37   | 0.000  |
| EX-10A | JUNCTION | 18.21 | 18.21  | 0 | 12:30 | 0.613  | 0.613  | 0.000  |
| EX-9   | JUNCTION | 24.38 | 24.38  | 0 | 12:25 | 0.865  | 0.865  | 0.000  |
| EX-8   | JUNCTION | 9.36  | 9.36   | 0 | 12:20 | 0.176  | 0.176  | 0.000  |
| EX-7   | JUNCTION | 35.87 | 35.87  | 0 | 12:25 | 1.22   | 1.22   | 0.000  |
| EX-5   | JUNCTION | 46.44 | 46.44  | 0 | 12:30 | 1.36   | 1.36   | 0.000  |
| EX-12  | JUNCTION | 17.03 | 17.03  | 0 | 12:20 | 0.281  | 0.281  | 0.000  |
| EX-11  | JUNCTION | 33.15 | 33.15  | 0 | 12:25 | 0.716  | 0.716  | 0.000  |
| EX-13  | JUNCTION | 17.30 | 17.30  | 0 | 12:25 | 0.565  | 0.565  | 0.000  |
| EX-24  | JUNCTION | 15.37 | 15.37  | 0 | 12:25 | 0.418  | 0.418  | 0.000  |
| EX-25  | JUNCTION | 5.78  | 5.78   | 0 | 12:25 | 0.186  | 0.186  | 0.000  |
| DP-53A | OUTFALL  | 0.00  | 602.01 | 0 | 13:27 | 0      | 27.4   | 0.000  |
| DP-9A  | OUTFALL  | 0.00  | 101.87 | 0 | 12:39 | 0      | 3.06   | 0.000  |
| DP-1   | OUTFALL  | 0.00  | 4.88   | 0 | 12:20 | 0      | 0.0807 | 0.000  |
| DP-2   | OUTFALL  | 0.00  | 4.41   | 0 | 12:20 | 0      | 0.0874 | 0.000  |
| DP-4   | OUTFALL  | 0.00  | 35.87  | 0 | 12:25 | 0      | 1.22   | 0.000  |
| DP-5   | OUTFALL  | 0.00  | 9.36   | 0 | 12:20 | 0      | 0.176  | 0.000  |
| DP-6   | OUTFALL  | 0.00  | 24.38  | 0 | 12:25 | 0      | 0.865  | 0.000  |
| DP-7   | OUTFALL  | 0.00  | 82.23  | 0 | 12:50 | 0      | 3.36   | 0.000  |
| DP-3   | OUTFALL  | 0.00  | 0.69   | 0 | 12:20 | 0      | 0.0197 | 0.000  |
| DP-8   | OUTFALL  | 0.00  | 50.28  | 0 | 12:33 | 0      | 1.59   | 0.000  |

\*\*\*\*\*

Node Flooding Summary

\*\*\*\*\*

No nodes were flooded.

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| DP-53A       | 48.54             | 26.87           | 602.01          | 27.393                   |
| DP-9A        | 30.77             | 4.73            | 101.87          | 3.057                    |
| DP-1         | 2.34              | 1.64            | 4.88            | 0.081                    |
| DP-2         | 2.77              | 1.50            | 4.41            | 0.087                    |
| DP-4         | 31.88             | 1.82            | 35.87           | 1.219                    |
| DP-5         | 28.56             | 0.29            | 9.36            | 0.176                    |
| DP-6         | 31.97             | 1.29            | 24.38           | 0.865                    |
| DP-7         | 10.35             | 15.46           | 82.23           | 3.362                    |
| DP-3         | 4.01              | 0.23            | 0.69            | 0.020                    |
| DP-8         | 28.94             | 2.61            | 50.28           | 1.588                    |
| System       | 22.01             | 56.46           | 744.77          | 37.848                   |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow <br>CFS | Time of Occurrence<br>days hr:min | Maximum  Veloc <br>ft/sec | Max/ Full Flow | Max/ Full Depth |
|--------|---------|-----------------------|-----------------------------------|---------------------------|----------------|-----------------|
| RT-4   | CONDUIT | 105.39                | 0 12:36                           | 4.20                      | 0.00           | 0.07            |
| RT-1   | CONDUIT | 75.57                 | 0 12:45                           | 4.03                      | 0.00           | 0.06            |
| RT-3   | CONDUIT | 54.00                 | 0 12:30                           | 3.76                      | 0.00           | 0.05            |
| RT-2   | CONDUIT | 50.88                 | 0 12:41                           | 3.71                      | 0.00           | 0.05            |
| RT-6   | CONDUIT | 91.46                 | 0 12:31                           | 4.61                      | 0.00           | 0.06            |
| RT-5   | CONDUIT | 287.83                | 0 12:48                           | 5.78                      | 0.01           | 0.11            |
| RT-7   | CONDUIT | 130.49                | 0 12:48                           | 4.44                      | 0.00           | 0.08            |
| RT-10  | CONDUIT | 64.67                 | 0 12:39                           | 3.99                      | 0.00           | 0.06            |
| RT-9   | CONDUIT | 505.82                | 0 12:59                           | 5.71                      | 0.01           | 0.11            |
| RT-14  | CONDUIT | 37.24                 | 0 12:49                           | 3.88                      | 0.00           | 0.05            |
| RT-13  | CONDUIT | 545.00                | 0 13:28                           | 5.09                      | 0.01           | 0.10            |
| RT-12  | CONDUIT | 541.38                | 0 13:25                           | 5.41                      | 0.01           | 0.10            |
| RT-18  | CONDUIT | 57.33                 | 0 12:35                           | 4.00                      | 0.00           | 0.05            |
| RT-19  | CONDUIT | 91.21                 | 0 12:40                           | 3.53                      | 0.00           | 0.08            |
| RT-11  | CONDUIT | 536.57                | 0 13:14                           | 5.54                      | 0.01           | 0.10            |
| RT-15  | CONDUIT | 91.96                 | 0 12:46                           | 4.68                      | 0.00           | 0.07            |
| RT-8   | CONDUIT | 499.30                | 0 12:51                           | 6.08                      | 0.01           | 0.13            |
| RT-16  | CONDUIT | 67.70                 | 0 12:52                           | 3.87                      | 0.00           | 0.05            |
| RT-17  | CONDUIT | 15.11                 | 0 12:48                           | 2.18                      | 0.00           | 0.04            |
| RT-17A | CONDUIT | 40.06                 | 0 12:37                           | 4.72                      | 0.00           | 0.04            |
| 32     | DUMMY   | 29.53                 | 0 12:25                           |                           |                |                 |
| 33     | DUMMY   | 34.11                 | 0 12:25                           |                           |                |                 |
| 34     | DUMMY   | 50.26                 | 0 12:25                           |                           |                |                 |
| 35     | DUMMY   | 59.73                 | 0 12:35                           |                           |                |                 |
| 36     | DUMMY   | 30.54                 | 0 12:25                           |                           |                |                 |
| 37     | DUMMY   | 40.88                 | 0 12:25                           |                           |                |                 |
| 38     | DUMMY   | 15.25                 | 0 12:20                           |                           |                |                 |
| 39     | DUMMY   | 77.80                 | 0 12:25                           |                           |                |                 |

|    |       |       |   |       |
|----|-------|-------|---|-------|
| 40 | DUMMY | 4.88  | 0 | 12:20 |
| 41 | DUMMY | 4.41  | 0 | 12:20 |
| 42 | DUMMY | 0.69  | 0 | 12:20 |
| 43 | DUMMY | 32.14 | 0 | 12:35 |
| 44 | DUMMY | 18.21 | 0 | 12:30 |
| 45 | DUMMY | 24.38 | 0 | 12:25 |
| 46 | DUMMY | 9.36  | 0 | 12:20 |
| 47 | DUMMY | 35.87 | 0 | 12:25 |
| 48 | DUMMY | 46.44 | 0 | 12:30 |
| 49 | DUMMY | 33.15 | 0 | 12:25 |
| 50 | DUMMY | 17.30 | 0 | 12:25 |
| 51 | DUMMY | 17.03 | 0 | 12:20 |
| 52 | DUMMY | 15.37 | 0 | 12:25 |
| 53 | DUMMY | 5.78  | 0 | 12:25 |

\*\*\*\*\*

Conduit Surcharge Summary

\*\*\*\*\*

No conduits were surcharged.

Analysis begun on: Thu Sep 02 14:55:27 2021

Analysis ended on: Thu Sep 02 14:55:27 2021

Total elapsed time: < 1 sec

SAND CREEK 2021 MDDP AMENDMENT  
EXISTING CONDITIONS  
10-YR 100YR TYPE II STORM

- WARNING 04: minimum elevation drop used for Conduit 32
- WARNING 04: minimum elevation drop used for Conduit 33
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 35
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 41
- WARNING 04: minimum elevation drop used for Conduit 42
- WARNING 04: minimum elevation drop used for Conduit 43
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 49
- WARNING 04: minimum elevation drop used for Conduit 50
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 52
- WARNING 04: minimum elevation drop used for Conduit 53

\*\*\*\*\*

NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.

\*\*\*\*\*

\*\*\*\*\*

Analysis Options

\*\*\*\*\*

- Flow Units ..... CFS
- Process Models:
  - Rainfall/Runoff ..... NO
  - RDII ..... NO
  - Snowmelt ..... NO
  - Groundwater ..... NO
  - Flow Routing ..... YES
  - Ponding Allowed ..... NO
  - Water Quality ..... NO
- Flow Routing Method ..... KINWAVE
- Starting Date ..... 01/01/2005 00:00:00
- Ending Date ..... 01/04/2005 06:00:00
- Antecedent Dry Days ..... 0.0
- Report Time Step ..... 00:05:00
- Routing Time Step ..... 30.00 sec

```

*****      Volume      Volume
Flow Routing Continuity  acre-feet  10^6 gal
*****      -----      -----
Dry Weather Inflow .....    0.000    0.000
Wet Weather Inflow .....    0.000    0.000
Groundwater Inflow .....    0.000    0.000
RDII Inflow .....          0.000    0.000
External Inflow .....      180.323    58.761
External Outflow .....     184.936    60.264
Flooding Loss .....        0.000    0.000
Evaporation Loss .....     0.000    0.000
Exfiltration Loss .....     0.000    0.000
Initial Stored Volume ....    0.000    0.000
Final Stored Volume .....    0.000    0.000
Continuity Error (%) .....  -2.558

```

```

*****
Highest Flow Instability Indexes
*****
All links are stable.

```

```

*****
Routing Time Step Summary
*****
Minimum Time Step      : 30.00 sec
Average Time Step      : 30.00 sec
Maximum Time Step      : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging  : 0.00

```

```

*****
Node Depth Summary
*****

```

| Node   | Type     | Average Depth<br>Feet | Maximum Depth<br>Feet | Maximum HGL<br>Feet | Time of Max Occurrence<br>days hr:min | Reported Max Depth<br>Feet |
|--------|----------|-----------------------|-----------------------|---------------------|---------------------------------------|----------------------------|
| EX-3   | JUNCTION | 0.03                  | 1.48                  | 211.48              | 0 12:25                               | 1.47                       |
| EX-4   | JUNCTION | 0.04                  | 1.62                  | 261.62              | 0 12:25                               | 1.62                       |
| EX-10  | JUNCTION | 0.04                  | 1.44                  | 139.44              | 0 12:30                               | 1.44                       |
| EX-20  | JUNCTION | 0.03                  | 1.41                  | 97.41               | 0 12:20                               | 1.39                       |
| EX-79  | JUNCTION | 0.03                  | 1.51                  | 523.51              | 0 12:20                               | 1.49                       |
| EX-80  | JUNCTION | 0.03                  | 1.26                  | 513.26              | 0 12:25                               | 1.26                       |
| EX-81  | JUNCTION | 0.04                  | 1.48                  | 493.48              | 0 12:30                               | 1.48                       |
| EX-82  | JUNCTION | 0.02                  | 1.26                  | 523.26              | 0 12:20                               | 1.25                       |
| DP-10  | JUNCTION | 0.07                  | 1.83                  | 75.83               | 0 12:36                               | 1.83                       |
| DP-56  | JUNCTION | 0.03                  | 1.22                  | 73.22               | 0 12:30                               | 1.22                       |
| DP-60A | JUNCTION | 0.09                  | 2.68                  | 24.68               | 0 13:17                               | 2.68                       |
| DP-63  | JUNCTION | 0.08                  | 2.73                  | 98.73               | 0 13:07                               | 2.73                       |
| DP-69  | JUNCTION | 0.08                  | 2.84                  | 194.84              | 0 12:54                               | 2.84                       |
| DP-71  | JUNCTION | 0.10                  | 3.32                  | 261.32              | 0 12:48                               | 3.32                       |

|        |          |      |      |        |         |      |
|--------|----------|------|------|--------|---------|------|
| DP-73  | JUNCTION | 0.09 | 3.33 | 303.33 | 0 12:44 | 3.33 |
| EX-74  | JUNCTION | 0.04 | 1.69 | 458.69 | 0 12:25 | 1.69 |
| EX-75  | JUNCTION | 0.08 | 2.78 | 394.78 | 0 12:36 | 2.77 |
| EX-78  | JUNCTION | 0.05 | 2.05 | 424.05 | 0 12:27 | 2.04 |
| DP-8A  | JUNCTION | 0.03 | 1.03 | 105.03 | 0 12:25 | 1.03 |
| DP-9   | JUNCTION | 0.06 | 2.14 | 24.14  | 0 12:31 | 2.13 |
| EX-76  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-73  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-88  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-77  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-6   | JUNCTION | 0.00 | 0.00 | 258.00 | 0 00:00 | 0.00 |
| EX-20A | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-21  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-3A  | JUNCTION | 0.00 | 0.00 | 74.00  | 0 00:00 | 0.00 |
| EX-0   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-1   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-2   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-4A  | JUNCTION | 0.00 | 0.00 | 96.00  | 0 00:00 | 0.00 |
| EX-10A | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-9   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-8   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-7   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-5   | JUNCTION | 0.00 | 0.00 | 192.00 | 0 00:00 | 0.00 |
| EX-12  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-11  | JUNCTION | 0.00 | 0.00 | 72.00  | 0 00:00 | 0.00 |
| EX-13  | JUNCTION | 0.00 | 0.00 | 104.00 | 0 00:00 | 0.00 |
| EX-24  | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-25  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-53A | OUTFALL  | 0.12 | 2.68 | 2.68   | 0 13:20 | 2.68 |
| DP-9A  | OUTFALL  | 0.06 | 2.12 | 2.12   | 0 12:37 | 2.11 |
| DP-1   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-2   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-4   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-5   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-6   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-7   | OUTFALL  | 0.04 | 1.36 | 1.36   | 0 12:50 | 1.36 |
| DP-3   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-8   | OUTFALL  | 0.03 | 1.22 | 1.22   | 0 12:33 | 1.21 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum                  |                        | Lateral<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Total<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Flow<br>Balance<br>Error<br>Percent |
|-------|----------|--------------------------|------------------------|--|--|-------------------------------------|
|       |          | Lateral<br>Inflow<br>CFS | Total<br>Inflow<br>CFS |  |  |                                     |
| EX-3  | JUNCTION | 74.70                    | 74.70                  | 2.02   | 2.02   | 0.000                               |
| EX-4  | JUNCTION | 110.61                   | 110.61                 | 2.83   | 2.83   | 0.000                               |
| EX-10 | JUNCTION | 122.69                   | 122.69                 | 4.07   | 4.07   | 0.000                               |
| EX-20 | JUNCTION | 108.71                   | 108.71                 | 2.08   | 2.08   | 0.000                               |
| EX-79 | JUNCTION | 156.40                   | 156.40                 | 3.01   | 3.01   | 0.000                               |
| EX-80 | JUNCTION | 93.62                    | 93.62                  | 2.36   | 2.36   | 0.000                               |
| EX-81 | JUNCTION | 131.58                   | 131.58                 | 3.81   | 3.81   | 0.000                               |

|        |          |        |        |   |       |        |        |        |
|--------|----------|--------|--------|---|-------|--------|--------|--------|
| EX-82  | JUNCTION | 95.70  | 95.70  | 0 | 12:20 | 1.71   | 1.71   | -0.000 |
| DP-10  | JUNCTION | 0.00   | 146.19 | 0 | 12:36 | 0      | 5.82   | 0.000  |
| DP-56  | JUNCTION | 0.00   | 96.37  | 0 | 12:30 | 0      | 2.85   | 0.000  |
| DP-60A | JUNCTION | 0.00   | 886.79 | 0 | 13:17 | 0      | 35.4   | 0.000  |
| DP-63  | JUNCTION | 0.00   | 899.71 | 0 | 13:07 | 0      | 34.5   | 0.000  |
| DP-69  | JUNCTION | 0.00   | 923.83 | 0 | 12:54 | 0      | 32     | 0.000  |
| DP-71  | JUNCTION | 0.00   | 818.24 | 0 | 12:48 | 0      | 26.9   | 0.000  |
| DP-73  | JUNCTION | 0.00   | 791.79 | 0 | 12:44 | 0      | 25.6   | 0.000  |
| EX-74  | JUNCTION | 106.02 | 175.09 | 0 | 12:25 | 2.04   | 3.77   | 0.000  |
| EX-75  | JUNCTION | 44.57  | 468.77 | 0 | 12:36 | 1.35   | 14.2   | 0.000  |
| EX-78  | JUNCTION | 130.23 | 250.53 | 0 | 12:27 | 2.65   | 5.68   | 0.000  |
| DP-8A  | JUNCTION | 0.00   | 31.43  | 0 | 12:25 | 0      | 1.03   | 0.000  |
| DP-9   | JUNCTION | 0.00   | 160.49 | 0 | 12:31 | 0      | 4.37   | 0.000  |
| EX-76  | JUNCTION | 44.13  | 44.13  | 0 | 12:25 | 1.41   | 1.41   | 0.000  |
| EX-73  | JUNCTION | 51.72  | 51.72  | 0 | 12:25 | 1.38   | 1.38   | 0.000  |
| EX-88  | JUNCTION | 77.94  | 77.94  | 0 | 12:25 | 2.01   | 2.01   | 0.000  |
| EX-77  | JUNCTION | 92.70  | 92.70  | 0 | 12:35 | 3.33   | 3.33   | 0.000  |
| EX-6   | JUNCTION | 47.33  | 47.33  | 0 | 12:25 | 1.31   | 1.31   | 0.000  |
| EX-20A | JUNCTION | 75.91  | 75.91  | 0 | 12:25 | 2.22   | 2.22   | 0.000  |
| EX-21  | JUNCTION | 22.24  | 22.24  | 0 | 12:20 | 0.595  | 0.595  | 0.000  |
| EX-3A  | JUNCTION | 116.10 | 116.10 | 0 | 12:25 | 3.68   | 3.68   | 0.000  |
| EX-0   | JUNCTION | 11.82  | 11.82  | 0 | 12:15 | 0.202  | 0.202  | 0.000  |
| EX-1   | JUNCTION | 10.85  | 10.85  | 0 | 12:20 | 0.219  | 0.219  | 0.000  |
| EX-2   | JUNCTION | 1.71   | 1.71   | 0 | 12:20 | 0.0493 | 0.0493 | 0.000  |
| EX-4A  | JUNCTION | 50.39  | 50.39  | 0 | 12:35 | 2.16   | 2.16   | 0.000  |
| EX-10A | JUNCTION | 45.66  | 45.66  | 0 | 12:30 | 1.54   | 1.54   | 0.000  |
| EX-9   | JUNCTION | 46.12  | 46.12  | 0 | 12:25 | 1.57   | 1.57   | 0.000  |
| EX-8   | JUNCTION | 20.80  | 20.80  | 0 | 12:20 | 0.395  | 0.395  | 0.000  |
| EX-7   | JUNCTION | 65.46  | 65.46  | 0 | 12:25 | 2.11   | 2.11   | 0.000  |
| EX-5   | JUNCTION | 73.05  | 73.05  | 0 | 12:25 | 2.15   | 2.15   | 0.000  |
| EX-12  | JUNCTION | 29.37  | 29.37  | 0 | 12:15 | 0.488  | 0.488  | 0.000  |
| EX-11  | JUNCTION | 82.24  | 82.24  | 0 | 12:25 | 1.79   | 1.79   | 0.000  |
| EX-13  | JUNCTION | 31.43  | 31.43  | 0 | 12:25 | 1.03   | 1.03   | 0.000  |
| EX-24  | JUNCTION | 27.26  | 27.26  | 0 | 12:25 | 0.746  | 0.746  | 0.000  |
| EX-25  | JUNCTION | 14.41  | 14.41  | 0 | 12:25 | 0.467  | 0.467  | 0.000  |
| DP-53A | OUTFALL  | 0.00   | 983.58 | 0 | 13:19 | 0      | 41.7   | 0.000  |
| DP-9A  | OUTFALL  | 0.00   | 173.68 | 0 | 12:37 | 0      | 4.96   | 0.000  |
| DP-1   | OUTFALL  | 0.00   | 11.82  | 0 | 12:15 | 0      | 0.202  | 0.000  |
| DP-2   | OUTFALL  | 0.00   | 10.85  | 0 | 12:20 | 0      | 0.219  | 0.000  |
| DP-4   | OUTFALL  | 0.00   | 65.46  | 0 | 12:25 | 0      | 2.11   | 0.000  |
| DP-5   | OUTFALL  | 0.00   | 20.80  | 0 | 12:20 | 0      | 0.395  | 0.000  |
| DP-6   | OUTFALL  | 0.00   | 46.12  | 0 | 12:25 | 0      | 1.57   | 0.000  |
| DP-7   | OUTFALL  | 0.00   | 143.62 | 0 | 12:47 | 0      | 5.73   | 0.000  |
| DP-3   | OUTFALL  | 0.00   | 1.71   | 0 | 12:20 | 0      | 0.0493 | 0.000  |
| DP-8   | OUTFALL  | 0.00   | 115.07 | 0 | 12:31 | 0      | 3.34   | 0.000  |

\*\*\*\*\*

Node Flooding Summary

\*\*\*\*\*

No nodes were flooded.

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*



| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| DP-53A       | 49.33             | 40.23           | 983.58          | 41.681                   |
| DP-9A        | 31.25             | 7.56            | 173.68          | 4.960                    |
| DP-1         | 2.45              | 3.94            | 11.82           | 0.202                    |
| DP-2         | 2.87              | 3.63            | 10.85           | 0.219                    |
| DP-4         | 32.22             | 3.12            | 65.46           | 2.112                    |
| DP-5         | 29.06             | 0.65            | 20.80           | 0.395                    |
| DP-6         | 32.34             | 2.30            | 46.12           | 1.565                    |
| DP-7         | 11.40             | 23.95           | 143.62          | 5.734                    |
| DP-3         | 4.13              | 0.57            | 1.71            | 0.049                    |
| DP-8         | 29.37             | 5.42            | 115.07          | 3.342                    |
| System       | 22.44             | 91.36           | 1270.10         | 60.260                   |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow <br>CFS | Time of Occurrence<br>days hr:min | Maximum  Veloc <br>ft/sec | Max/ Full Flow | Max/ Full Depth |
|--------|---------|-----------------------|-----------------------------------|---------------------------|----------------|-----------------|
| RT-4   | CONDUIT | 164.54                | 0 12:34                           | 4.68                      | 0.00           | 0.08            |
| RT-1   | CONDUIT | 119.66                | 0 12:43                           | 4.46                      | 0.00           | 0.07            |
| RT-3   | CONDUIT | 85.36                 | 0 12:29                           | 4.19                      | 0.00           | 0.06            |
| RT-2   | CONDUIT | 78.68                 | 0 12:40                           | 4.12                      | 0.00           | 0.06            |
| RT-6   | CONDUIT | 140.15                | 0 12:30                           | 5.11                      | 0.00           | 0.07            |
| RT-5   | CONDUIT | 451.23                | 0 12:45                           | 6.48                      | 0.01           | 0.14            |
| RT-7   | CONDUIT | 203.01                | 0 12:45                           | 4.86                      | 0.00           | 0.09            |
| RT-10  | CONDUIT | 101.36                | 0 12:37                           | 4.47                      | 0.00           | 0.08            |
| RT-9   | CONDUIT | 801.27                | 0 12:55                           | 6.53                      | 0.01           | 0.13            |
| RT-14  | CONDUIT | 59.61                 | 0 12:45                           | 4.37                      | 0.00           | 0.07            |
| RT-13  | CONDUIT | 884.79                | 0 13:20                           | 5.91                      | 0.02           | 0.13            |
| RT-12  | CONDUIT | 876.50                | 0 13:17                           | 6.27                      | 0.01           | 0.13            |
| RT-18  | CONDUIT | 91.02                 | 0 12:34                           | 4.41                      | 0.00           | 0.06            |
| RT-19  | CONDUIT | 157.38                | 0 12:37                           | 4.05                      | 0.00           | 0.11            |
| RT-11  | CONDUIT | 864.66                | 0 13:07                           | 6.44                      | 0.02           | 0.14            |
| RT-15  | CONDUIT | 144.19                | 0 12:43                           | 5.30                      | 0.00           | 0.09            |
| RT-8   | CONDUIT | 786.90                | 0 12:48                           | 6.85                      | 0.01           | 0.17            |
| RT-16  | CONDUIT | 106.83                | 0 12:50                           | 4.31                      | 0.00           | 0.07            |
| RT-17  | CONDUIT | 28.18                 | 0 12:45                           | 2.58                      | 0.00           | 0.05            |
| RT-17A | CONDUIT | 95.73                 | 0 12:33                           | 5.96                      | 0.00           | 0.06            |
| 32     | DUMMY   | 44.13                 | 0 12:25                           |                           |                |                 |
| 33     | DUMMY   | 51.72                 | 0 12:25                           |                           |                |                 |
| 34     | DUMMY   | 77.94                 | 0 12:25                           |                           |                |                 |
| 35     | DUMMY   | 92.70                 | 0 12:35                           |                           |                |                 |
| 36     | DUMMY   | 47.33                 | 0 12:25                           |                           |                |                 |
| 37     | DUMMY   | 75.91                 | 0 12:25                           |                           |                |                 |
| 38     | DUMMY   | 22.24                 | 0 12:20                           |                           |                |                 |
| 39     | DUMMY   | 116.10                | 0 12:25                           |                           |                |                 |

|    |       |       |   |       |
|----|-------|-------|---|-------|
| 40 | DUMMY | 11.82 | 0 | 12:15 |
| 41 | DUMMY | 10.85 | 0 | 12:20 |
| 42 | DUMMY | 1.71  | 0 | 12:20 |
| 43 | DUMMY | 50.39 | 0 | 12:35 |
| 44 | DUMMY | 45.66 | 0 | 12:30 |
| 45 | DUMMY | 46.12 | 0 | 12:25 |
| 46 | DUMMY | 20.80 | 0 | 12:20 |
| 47 | DUMMY | 65.46 | 0 | 12:25 |
| 48 | DUMMY | 73.05 | 0 | 12:25 |
| 49 | DUMMY | 82.24 | 0 | 12:25 |
| 50 | DUMMY | 31.43 | 0 | 12:25 |
| 51 | DUMMY | 29.37 | 0 | 12:15 |
| 52 | DUMMY | 27.26 | 0 | 12:25 |
| 53 | DUMMY | 14.41 | 0 | 12:25 |

\*\*\*\*\*  
Conduit Surcharge Summary  
\*\*\*\*\*

No conduits were surcharged.

Analysis begun on: Thu Sep 02 14:54:53 2021  
Analysis ended on: Thu Sep 02 14:54:53 2021  
Total elapsed time: < 1 sec

SAND CREEK 2021 MDDP AMENDMENT  
EXISTING CONDITIONS  
25-YR 100YR TYPE II STORM

- WARNING 04: minimum elevation drop used for Conduit 32
- WARNING 04: minimum elevation drop used for Conduit 33
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 35
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 41
- WARNING 04: minimum elevation drop used for Conduit 42
- WARNING 04: minimum elevation drop used for Conduit 43
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 49
- WARNING 04: minimum elevation drop used for Conduit 50
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 52
- WARNING 04: minimum elevation drop used for Conduit 53

\*\*\*\*\*

NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.

\*\*\*\*\*

\*\*\*\*\*

Analysis Options

\*\*\*\*\*

- Flow Units ..... CFS
- Process Models:
- Rainfall/Runoff ..... NO
- RDII ..... NO
- Snowmelt ..... NO
- Groundwater ..... NO
- Flow Routing ..... YES
- Ponding Allowed ..... NO
- Water Quality ..... NO
- Flow Routing Method ..... KINWAVE
- Starting Date ..... 01/01/2005 00:00:00
- Ending Date ..... 01/04/2005 06:00:00
- Antecedent Dry Days ..... 0.0
- Report Time Step ..... 00:05:00
- Routing Time Step ..... 30.00 sec

```

*****      Volume      Volume
Flow Routing Continuity  acre-feet  10^6 gal
*****      -----      -----
Dry Weather Inflow .....    0.000    0.000
Wet Weather Inflow .....    0.000    0.000
Groundwater Inflow .....    0.000    0.000
RDII Inflow .....          0.000    0.000
External Inflow .....      236.756    77.150
External Outflow .....     241.696    78.760
Flooding Loss .....         0.000    0.000
Evaporation Loss .....      0.000    0.000
Exfiltration Loss .....     0.000    0.000
Initial Stored Volume ....    0.000    0.000
Final Stored Volume .....    0.000    0.000
Continuity Error (%) .....  -2.086

```

```

*****
Highest Flow Instability Indexes
*****
All links are stable.

```

```

*****
Routing Time Step Summary
*****
Minimum Time Step      : 30.00 sec
Average Time Step      : 30.00 sec
Maximum Time Step      : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging  : 0.00

```

```

*****
Node Depth Summary
*****

```

| Node   | Type     | Average Depth | Maximum Depth | Maximum HGL | Time of Max Occurrence | Reported Max Depth |
|--------|----------|---------------|---------------|-------------|------------------------|--------------------|
|        |          | Feet          | Feet          | Feet        | days hr:min            | Feet               |
| EX-3   | JUNCTION | 0.04          | 1.67          | 211.67      | 0 12:25                | 1.66               |
| EX-4   | JUNCTION | 0.04          | 1.82          | 261.82      | 0 12:25                | 1.81               |
| EX-10  | JUNCTION | 0.05          | 1.61          | 139.61      | 0 12:30                | 1.60               |
| EX-20  | JUNCTION | 0.03          | 1.56          | 97.56       | 0 12:20                | 1.55               |
| EX-79  | JUNCTION | 0.04          | 1.66          | 523.66      | 0 12:20                | 1.65               |
| EX-80  | JUNCTION | 0.04          | 1.40          | 513.40      | 0 12:25                | 1.40               |
| EX-81  | JUNCTION | 0.04          | 1.65          | 493.65      | 0 12:30                | 1.65               |
| EX-82  | JUNCTION | 0.02          | 1.40          | 523.40      | 0 12:20                | 1.39               |
| DP-10  | JUNCTION | 0.08          | 2.08          | 76.08       | 0 12:34                | 2.08               |
| DP-56  | JUNCTION | 0.04          | 1.46          | 73.46       | 0 12:30                | 1.46               |
| DP-60A | JUNCTION | 0.10          | 3.13          | 25.13       | 0 13:12                | 3.12               |
| DP-63  | JUNCTION | 0.10          | 3.20          | 99.20       | 0 13:04                | 3.20               |
| DP-69  | JUNCTION | 0.09          | 3.30          | 195.30      | 0 12:52                | 3.29               |
| DP-71  | JUNCTION | 0.11          | 3.76          | 261.76      | 0 12:46                | 3.75               |

|        |          |      |      |        |         |      |
|--------|----------|------|------|--------|---------|------|
| DP-73  | JUNCTION | 0.11 | 3.77 | 303.77 | 0 12:42 | 3.76 |
| EX-74  | JUNCTION | 0.05 | 1.88 | 458.88 | 0 12:25 | 1.88 |
| EX-75  | JUNCTION | 0.09 | 3.12 | 395.12 | 0 12:35 | 3.12 |
| EX-78  | JUNCTION | 0.06 | 2.27 | 424.27 | 0 12:26 | 2.27 |
| DP-8A  | JUNCTION | 0.03 | 1.19 | 105.19 | 0 12:25 | 1.19 |
| DP-9   | JUNCTION | 0.07 | 2.44 | 24.44  | 0 12:30 | 2.43 |
| EX-76  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-73  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-88  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-77  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-6   | JUNCTION | 0.00 | 0.00 | 258.00 | 0 00:00 | 0.00 |
| EX-20A | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-21  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-3A  | JUNCTION | 0.00 | 0.00 | 74.00  | 0 00:00 | 0.00 |
| EX-0   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-1   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-2   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-4A  | JUNCTION | 0.00 | 0.00 | 96.00  | 0 00:00 | 0.00 |
| EX-10A | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-9   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-8   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-7   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-5   | JUNCTION | 0.00 | 0.00 | 192.00 | 0 00:00 | 0.00 |
| EX-12  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-11  | JUNCTION | 0.00 | 0.00 | 72.00  | 0 00:00 | 0.00 |
| EX-13  | JUNCTION | 0.00 | 0.00 | 104.00 | 0 00:00 | 0.00 |
| EX-24  | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-25  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-53A | OUTFALL  | 0.13 | 3.12 | 3.12   | 0 13:15 | 3.12 |
| DP-9A  | OUTFALL  | 0.07 | 2.42 | 2.42   | 0 12:36 | 2.41 |
| DP-1   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-2   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-4   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-5   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-6   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-7   | OUTFALL  | 0.05 | 1.52 | 1.52   | 0 12:49 | 1.52 |
| DP-3   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-8   | OUTFALL  | 0.03 | 1.46 | 1.46   | 0 12:32 | 1.45 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum       |  | Lateral<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Total<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Flow<br>Balance<br>Error<br>Percent |
|-------|----------|---------------|--|--|--|-------------------------------------|
|       |          | Inflow<br>CFS | Time of Max<br>Occurrence<br>days hr:min |  |  |                                     |
| EX-3  | JUNCTION | 95.73         | 95.73                                    | 2.62   | 2.62   | 0.000                               |
| EX-4  | JUNCTION | 141.70        | 141.70                                   | 3.68   | 3.68   | 0.000                               |
| EX-10 | JUNCTION | 157.63        | 157.63                                   | 5.27   | 5.27   | 0.000                               |
| EX-20 | JUNCTION | 138.82        | 138.82                                   | 2.71   | 2.71   | 0.000                               |
| EX-79 | JUNCTION | 197.01        | 197.01                                   | 3.86   | 3.86   | 0.000                               |
| EX-80 | JUNCTION | 118.31        | 118.31                                   | 3.02   | 3.02   | 0.000                               |
| EX-81 | JUNCTION | 169.33        | 169.33                                   | 4.96   | 4.96   | 0.000                               |

|        |          |        |         |   |       |       |       |       |
|--------|----------|--------|---------|---|-------|-------|-------|-------|
| EX-82  | JUNCTION | 121.49 | 121.49  | 0 | 12:20 | 2.22  | 2.22  | 0.000 |
| DP-10  | JUNCTION | 0.00   | 189.33  | 0 | 12:34 | 0     | 7.33  | 0.000 |
| DP-56  | JUNCTION | 0.00   | 141.51  | 0 | 12:30 | 0     | 4.09  | 0.000 |
| DP-60A | JUNCTION | 0.00   | 1179.00 | 0 | 13:12 | 0     | 45.5  | 0.000 |
| DP-63  | JUNCTION | 0.00   | 1192.36 | 0 | 13:04 | 0     | 44.4  | 0.000 |
| DP-69  | JUNCTION | 0.00   | 1213.68 | 0 | 12:52 | 0     | 41.2  | 0.000 |
| DP-71  | JUNCTION | 0.00   | 1068.91 | 0 | 12:46 | 0     | 34.6  | 0.000 |
| DP-73  | JUNCTION | 0.00   | 1033.04 | 0 | 12:42 | 0     | 32.9  | 0.000 |
| EX-74  | JUNCTION | 132.02 | 224.86  | 0 | 12:25 | 2.59  | 4.84  | 0.000 |
| EX-75  | JUNCTION | 56.20  | 607.40  | 0 | 12:35 | 1.72  | 18.3  | 0.000 |
| EX-78  | JUNCTION | 162.88 | 319.95  | 0 | 12:26 | 3.37  | 7.26  | 0.000 |
| DP-8A  | JUNCTION | 0.00   | 42.65   | 0 | 12:25 | 0     | 1.39  | 0.000 |
| DP-9   | JUNCTION | 0.00   | 215.19  | 0 | 12:30 | 0     | 5.78  | 0.000 |
| EX-76  | JUNCTION | 55.94  | 55.94   | 0 | 12:25 | 1.8   | 1.8   | 0.000 |
| EX-73  | JUNCTION | 65.79  | 65.79   | 0 | 12:25 | 1.78  | 1.78  | 0.000 |
| EX-88  | JUNCTION | 100.02 | 100.02  | 0 | 12:25 | 2.62  | 2.62  | 0.000 |
| EX-77  | JUNCTION | 119.97 | 119.97  | 0 | 12:30 | 4.35  | 4.35  | 0.000 |
| EX-6   | JUNCTION | 60.79  | 60.79   | 0 | 12:25 | 1.7   | 1.7   | 0.000 |
| EX-20A | JUNCTION | 103.86 | 103.86  | 0 | 12:25 | 3     | 3     | 0.000 |
| EX-21  | JUNCTION | 27.80  | 27.80   | 0 | 12:20 | 0.75  | 0.75  | 0.000 |
| EX-3A  | JUNCTION | 146.37 | 146.37  | 0 | 12:20 | 4.57  | 4.57  | 0.000 |
| EX-0   | JUNCTION | 17.63  | 17.63   | 0 | 12:15 | 0.3   | 0.3   | 0.000 |
| EX-1   | JUNCTION | 15.93  | 15.93   | 0 | 12:20 | 0.325 | 0.325 | 0.000 |
| EX-2   | JUNCTION | 2.52   | 2.52    | 0 | 12:20 | 0.073 | 0.073 | 0.000 |
| EX-4A  | JUNCTION | 65.45  | 65.45   | 0 | 12:35 | 2.82  | 2.82  | 0.000 |
| EX-10A | JUNCTION | 67.61  | 67.61   | 0 | 12:30 | 2.28  | 2.28  | 0.000 |
| EX-9   | JUNCTION | 63.58  | 63.58   | 0 | 12:25 | 2.13  | 2.13  | 0.000 |
| EX-8   | JUNCTION | 29.82  | 29.82   | 0 | 12:20 | 0.57  | 0.57  | 0.000 |
| EX-7   | JUNCTION | 89.09  | 89.09   | 0 | 12:25 | 2.83  | 2.83  | 0.000 |
| EX-5   | JUNCTION | 94.83  | 94.83   | 0 | 12:25 | 2.82  | 2.82  | 0.000 |
| EX-12  | JUNCTION | 39.30  | 39.30   | 0 | 12:15 | 0.653 | 0.653 | 0.000 |
| EX-11  | JUNCTION | 121.23 | 121.23  | 0 | 12:25 | 2.66  | 2.66  | 0.000 |
| EX-13  | JUNCTION | 42.65  | 42.65   | 0 | 12:25 | 1.39  | 1.39  | 0.000 |
| EX-24  | JUNCTION | 36.67  | 36.67   | 0 | 12:20 | 1.01  | 1.01  | 0.000 |
| EX-25  | JUNCTION | 21.29  | 21.29   | 0 | 12:25 | 0.691 | 0.691 | 0.000 |
| DP-53A | OUTFALL  | 0.00   | 1311.23 | 0 | 13:14 | 0     | 53.6  | 0.000 |
| DP-9A  | OUTFALL  | 0.00   | 232.21  | 0 | 12:36 | 0     | 6.53  | 0.000 |
| DP-1   | OUTFALL  | 0.00   | 17.63   | 0 | 12:15 | 0     | 0.3   | 0.000 |
| DP-2   | OUTFALL  | 0.00   | 15.93   | 0 | 12:20 | 0     | 0.325 | 0.000 |
| DP-4   | OUTFALL  | 0.00   | 89.09   | 0 | 12:25 | 0     | 2.83  | 0.000 |
| DP-5   | OUTFALL  | 0.00   | 29.82   | 0 | 12:20 | 0     | 0.57  | 0.000 |
| DP-6   | OUTFALL  | 0.00   | 63.58   | 0 | 12:25 | 0     | 2.13  | 0.000 |
| DP-7   | OUTFALL  | 0.00   | 194.75  | 0 | 12:46 | 0     | 7.69  | 0.000 |
| DP-3   | OUTFALL  | 0.00   | 2.52    | 0 | 12:20 | 0     | 0.073 | 0.000 |
| DP-8   | OUTFALL  | 0.00   | 167.23  | 0 | 12:31 | 0     | 4.74  | 0.000 |

\*\*\*\*\*

Node Flooding Summary

\*\*\*\*\*

No nodes were flooded.

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| DP-53A       | 50.10             | 50.90           | 1311.23         | 53.562                   |
| DP-9A        | 31.54             | 9.85            | 232.21          | 6.526                    |
| DP-1         | 2.45              | 5.83            | 17.63           | 0.300                    |
| DP-2         | 2.87              | 5.38            | 15.93           | 0.325                    |
| DP-4         | 32.40             | 4.16            | 89.09           | 2.833                    |
| DP-5         | 29.36             | 0.92            | 29.82           | 0.570                    |
| DP-6         | 32.56             | 3.12            | 63.58           | 2.134                    |
| DP-7         | 12.38             | 29.56           | 194.75          | 7.688                    |
| DP-3         | 4.13              | 0.84            | 2.52            | 0.073                    |
| DP-8         | 29.63             | 7.62            | 167.23          | 4.744                    |
| System       | 22.74             | 118.20          | 1725.18         | 78.754                   |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow <br>CFS | Time of Occurrence<br>days hr:min | Maximum  Veloc <br>ft/sec | Max/ Full Flow | Max/ Full Depth |
|--------|---------|-----------------------|-----------------------------------|---------------------------|----------------|-----------------|
| RT-4   | CONDUIT | 212.88                | 0 12:32                           | 4.97                      | 0.00           | 0.09            |
| RT-1   | CONDUIT | 155.96                | 0 12:42                           | 4.72                      | 0.00           | 0.08            |
| RT-3   | CONDUIT | 110.27                | 0 12:28                           | 4.45                      | 0.00           | 0.07            |
| RT-2   | CONDUIT | 101.46                | 0 12:39                           | 4.37                      | 0.00           | 0.06            |
| RT-6   | CONDUIT | 178.98                | 0 12:29                           | 5.40                      | 0.00           | 0.08            |
| RT-5   | CONDUIT | 587.39                | 0 12:44                           | 6.92                      | 0.01           | 0.15            |
| RT-7   | CONDUIT | 263.39                | 0 12:43                           | 5.16                      | 0.00           | 0.10            |
| RT-10  | CONDUIT | 131.25                | 0 12:36                           | 4.76                      | 0.00           | 0.09            |
| RT-9   | CONDUIT | 1049.57               | 0 12:53                           | 7.05                      | 0.02           | 0.16            |
| RT-14  | CONDUIT | 78.22                 | 0 12:45                           | 4.68                      | 0.00           | 0.07            |
| RT-13  | CONDUIT | 1176.49               | 0 13:15                           | 6.43                      | 0.02           | 0.16            |
| RT-12  | CONDUIT | 1164.03               | 0 13:12                           | 6.82                      | 0.02           | 0.15            |
| RT-18  | CONDUIT | 118.47                | 0 12:33                           | 4.31                      | 0.00           | 0.07            |
| RT-19  | CONDUIT | 211.25                | 0 12:36                           | 4.36                      | 0.01           | 0.12            |
| RT-11  | CONDUIT | 1144.73               | 0 13:04                           | 7.03                      | 0.03           | 0.16            |
| RT-15  | CONDUIT | 186.90                | 0 12:42                           | 5.67                      | 0.00           | 0.10            |
| RT-8   | CONDUIT | 1027.18               | 0 12:46                           | 7.35                      | 0.02           | 0.19            |
| RT-16  | CONDUIT | 139.19                | 0 12:49                           | 4.60                      | 0.00           | 0.08            |
| RT-17  | CONDUIT | 38.62                 | 0 12:43                           | 2.79                      | 0.00           | 0.06            |
| RT-17A | CONDUIT | 141.16                | 0 12:32                           | 6.60                      | 0.00           | 0.07            |
| 32     | DUMMY   | 55.94                 | 0 12:25                           |                           |                |                 |
| 33     | DUMMY   | 65.79                 | 0 12:25                           |                           |                |                 |
| 34     | DUMMY   | 100.02                | 0 12:25                           |                           |                |                 |
| 35     | DUMMY   | 119.97                | 0 12:30                           |                           |                |                 |
| 36     | DUMMY   | 60.79                 | 0 12:25                           |                           |                |                 |
| 37     | DUMMY   | 103.86                | 0 12:25                           |                           |                |                 |
| 38     | DUMMY   | 27.80                 | 0 12:20                           |                           |                |                 |
| 39     | DUMMY   | 146.37                | 0 12:20                           |                           |                |                 |

|    |       |        |         |
|----|-------|--------|---------|
| 40 | DUMMY | 17.63  | 0 12:15 |
| 41 | DUMMY | 15.93  | 0 12:20 |
| 42 | DUMMY | 2.52   | 0 12:20 |
| 43 | DUMMY | 65.45  | 0 12:35 |
| 44 | DUMMY | 67.61  | 0 12:30 |
| 45 | DUMMY | 63.58  | 0 12:25 |
| 46 | DUMMY | 29.82  | 0 12:20 |
| 47 | DUMMY | 89.09  | 0 12:25 |
| 48 | DUMMY | 94.83  | 0 12:25 |
| 49 | DUMMY | 121.23 | 0 12:25 |
| 50 | DUMMY | 42.65  | 0 12:25 |
| 51 | DUMMY | 39.30  | 0 12:15 |
| 52 | DUMMY | 36.67  | 0 12:20 |
| 53 | DUMMY | 21.29  | 0 12:25 |

\*\*\*\*\*

Conduit Surcharge Summary

\*\*\*\*\*

No conduits were surcharged.

Analysis begun on: Thu Sep 02 14:53:56 2021

Analysis ended on: Thu Sep 02 14:53:56 2021

Total elapsed time: < 1 sec



SAND CREEK 2021 MDDP AMENDMENT  
EXISTING CONDITIONS  
50-YR 100YR TYPE II STORM

- WARNING 04: minimum elevation drop used for Conduit 32
- WARNING 04: minimum elevation drop used for Conduit 33
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 35
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 41
- WARNING 04: minimum elevation drop used for Conduit 42
- WARNING 04: minimum elevation drop used for Conduit 43
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 49
- WARNING 04: minimum elevation drop used for Conduit 50
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 52
- WARNING 04: minimum elevation drop used for Conduit 53

\*\*\*\*\*

NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.

\*\*\*\*\*

\*\*\*\*\*

Analysis Options

\*\*\*\*\*

- Flow Units ..... CFS
- Process Models:
- Rainfall/Runoff ..... NO
- RDII ..... NO
- Snowmelt ..... NO
- Groundwater ..... NO
- Flow Routing ..... YES
- Ponding Allowed ..... NO
- Water Quality ..... NO
- Flow Routing Method ..... KINWAVE
- Starting Date ..... 01/01/2005 00:00:00
- Ending Date ..... 01/04/2005 06:00:00
- Antecedent Dry Days ..... 0.0
- Report Time Step ..... 00:05:00
- Routing Time Step ..... 30.00 sec

```

*****      Volume      Volume
Flow Routing Continuity  acre-feet  10^6 gal
*****      -----      -----
Dry Weather Inflow .....      0.000      0.000
Wet Weather Inflow .....      0.000      0.000
Groundwater Inflow .....      0.000      0.000
RDII Inflow .....      0.000      0.000
External Inflow .....      324.744      105.823
External Outflow .....      330.139      107.581
Flooding Loss .....      0.000      0.000
Evaporation Loss .....      0.000      0.000
Exfiltration Loss .....      0.000      0.000
Initial Stored Volume ....      0.000      0.000
Final Stored Volume .....      0.000      0.000
Continuity Error (%) .....      -1.661

```

```

*****
Highest Flow Instability Indexes
*****
All links are stable.

```

```

*****
Routing Time Step Summary
*****
Minimum Time Step      : 30.00 sec
Average Time Step      : 30.00 sec
Maximum Time Step      : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging  : 0.00

```

```

*****
Node Depth Summary
*****

```

| Node   | Type     | Average Depth | Maximum Depth | Maximum HGL | Time of Max Occurrence | Reported Max Depth |
|--------|----------|---------------|---------------|-------------|------------------------|--------------------|
|        |          | Feet          | Feet          | Feet        | days hr:min            | Feet               |
| EX-3   | JUNCTION | 0.04          | 1.91          | 211.91      | 0 12:25                | 1.91               |
| EX-4   | JUNCTION | 0.05          | 2.07          | 262.07      | 0 12:25                | 2.06               |
| EX-10  | JUNCTION | 0.06          | 1.82          | 139.82      | 0 12:30                | 1.82               |
| EX-20  | JUNCTION | 0.03          | 1.77          | 97.77       | 0 12:20                | 1.76               |
| EX-79  | JUNCTION | 0.04          | 1.87          | 523.87      | 0 12:20                | 1.86               |
| EX-80  | JUNCTION | 0.04          | 1.58          | 513.58      | 0 12:25                | 1.58               |
| EX-81  | JUNCTION | 0.05          | 1.88          | 493.88      | 0 12:30                | 1.87               |
| EX-82  | JUNCTION | 0.03          | 1.58          | 523.58      | 0 12:20                | 1.58               |
| DP-10  | JUNCTION | 0.09          | 2.40          | 76.40       | 0 12:34                | 2.40               |
| DP-56  | JUNCTION | 0.04          | 1.74          | 73.74       | 0 12:28                | 1.74               |
| DP-60A | JUNCTION | 0.12          | 3.73          | 25.73       | 0 13:08                | 3.73               |
| DP-63  | JUNCTION | 0.11          | 3.83          | 99.83       | 0 13:01                | 3.83               |
| DP-69  | JUNCTION | 0.11          | 3.94          | 195.94      | 0 12:49                | 3.94               |
| DP-71  | JUNCTION | 0.12          | 4.34          | 262.34      | 0 12:44                | 4.34               |

|        |          |      |      |        |         |      |
|--------|----------|------|------|--------|---------|------|
| DP-73  | JUNCTION | 0.12 | 4.35 | 304.35 | 0 12:41 | 4.35 |
| EX-74  | JUNCTION | 0.05 | 2.13 | 459.13 | 0 12:24 | 2.13 |
| EX-75  | JUNCTION | 0.10 | 3.58 | 395.58 | 0 12:34 | 3.58 |
| EX-78  | JUNCTION | 0.07 | 2.56 | 424.56 | 0 12:26 | 2.56 |
| DP-8A  | JUNCTION | 0.04 | 1.39 | 105.39 | 0 12:25 | 1.39 |
| DP-9   | JUNCTION | 0.08 | 2.80 | 24.80  | 0 12:30 | 2.80 |
| EX-76  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-73  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 00:00 | 0.00 |
| EX-88  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-77  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 00:00 | 0.00 |
| EX-6   | JUNCTION | 0.00 | 0.00 | 258.00 | 0 00:00 | 0.00 |
| EX-20A | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-21  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-3A  | JUNCTION | 0.00 | 0.00 | 74.00  | 0 00:00 | 0.00 |
| EX-0   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-1   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-2   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-4A  | JUNCTION | 0.00 | 0.00 | 96.00  | 0 00:00 | 0.00 |
| EX-10A | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-9   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-8   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-7   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-5   | JUNCTION | 0.00 | 0.00 | 192.00 | 0 00:00 | 0.00 |
| EX-12  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| EX-11  | JUNCTION | 0.00 | 0.00 | 72.00  | 0 00:00 | 0.00 |
| EX-13  | JUNCTION | 0.00 | 0.00 | 104.00 | 0 00:00 | 0.00 |
| EX-24  | JUNCTION | 0.00 | 0.00 | 22.00  | 0 00:00 | 0.00 |
| EX-25  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-53A | OUTFALL  | 0.15 | 3.73 | 3.73   | 0 13:11 | 3.73 |
| DP-9A  | OUTFALL  | 0.08 | 2.78 | 2.78   | 0 12:35 | 2.78 |
| DP-1   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-2   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-4   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-5   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-6   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-7   | OUTFALL  | 0.05 | 1.74 | 1.74   | 0 12:48 | 1.74 |
| DP-3   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| DP-8   | OUTFALL  | 0.04 | 1.74 | 1.74   | 0 12:31 | 1.74 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum       |  | Lateral<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Total<br>Inflow<br>Volume<br>10 <sup>6</sup> gal | Flow<br>Balance<br>Error<br>Percent |       |
|-------|----------|---------------|--|--|--|-------------------------------------|-------|
|       |          | Inflow<br>CFS | Time of Max<br>Occurrence<br>days hr:min |  |  |                                     |       |
| EX-3  | JUNCTION | 128.03        | 128.03                                   | 0 12:25  | 3.58   | 3.58                                | 0.000 |
| EX-4  | JUNCTION | 189.38        | 189.38                                   | 0 12:25  | 5.02   | 5.02                                | 0.000 |
| EX-10 | JUNCTION | 211.69        | 211.69                                   | 0 12:30  | 7.17   | 7.17                                | 0.000 |
| EX-20 | JUNCTION | 184.50        | 184.50                                   | 0 12:20  | 3.7  | 3.7                                 | 0.000 |
| EX-79 | JUNCTION | 258.55        | 258.55                                   | 0 12:20  | 5.21   | 5.21                                | 0.000 |
| EX-80 | JUNCTION | 156.30        | 156.30                                   | 0 12:25  | 4.08   | 4.08                                | 0.000 |
| EX-81 | JUNCTION | 228.01        | 228.01                                   | 0 12:30  | 6.8  | 6.8                                 | 0.000 |

|        |          |        |         |   |       |       |       |       |
|--------|----------|--------|---------|---|-------|-------|-------|-------|
| EX-82  | JUNCTION | 160.67 | 160.67  | 0 | 12:20 | 3.04  | 3.04  | 0.000 |
| DP-10  | JUNCTION | 0.00   | 255.20  | 0 | 12:34 | 0     | 9.66  | 0.000 |
| DP-56  | JUNCTION | 0.00   | 207.98  | 0 | 12:28 | 0     | 5.93  | 0.000 |
| DP-60A | JUNCTION | 0.00   | 1649.04 | 0 | 13:08 | 0     | 61.6  | 0.000 |
| DP-63  | JUNCTION | 0.00   | 1661.58 | 0 | 13:00 | 0     | 60.1  | 0.000 |
| DP-69  | JUNCTION | 0.00   | 1675.53 | 0 | 12:49 | 0     | 55.8  | 0.000 |
| DP-71  | JUNCTION | 0.00   | 1466.20 | 0 | 12:44 | 0     | 46.8  | 0.000 |
| DP-73  | JUNCTION | 0.00   | 1414.41 | 0 | 12:41 | 0     | 44.4  | 0.000 |
| EX-74  | JUNCTION | 171.48 | 301.19  | 0 | 12:24 | 3.46  | 6.53  | 0.000 |
| EX-75  | JUNCTION | 73.94  | 824.55  | 0 | 12:34 | 2.3   | 24.7  | 0.000 |
| EX-78  | JUNCTION | 212.35 | 426.39  | 0 | 12:26 | 4.5   | 9.74  | 0.000 |
| DP-8A  | JUNCTION | 0.00   | 59.34   | 0 | 12:25 | 0     | 1.95  | 0.000 |
| DP-9   | JUNCTION | 0.00   | 297.14  | 0 | 12:30 | 0     | 7.96  | 0.000 |
| EX-76  | JUNCTION | 74.06  | 74.06   | 0 | 12:25 | 2.42  | 2.42  | 0.000 |
| EX-73  | JUNCTION | 87.48  | 87.48   | 0 | 12:25 | 2.42  | 2.42  | 0.000 |
| EX-88  | JUNCTION | 133.97 | 133.97  | 0 | 12:25 | 3.59  | 3.59  | 0.000 |
| EX-77  | JUNCTION | 162.20 | 162.20  | 0 | 12:35 | 5.95  | 5.95  | 0.000 |
| EX-6   | JUNCTION | 81.51  | 81.51   | 0 | 12:25 | 2.33  | 2.33  | 0.000 |
| EX-20A | JUNCTION | 144.84 | 144.84  | 0 | 12:25 | 4.17  | 4.17  | 0.000 |
| EX-21  | JUNCTION | 36.26  | 36.26   | 0 | 12:20 | 0.996 | 0.996 | 0.000 |
| EX-3A  | JUNCTION | 192.52 | 192.52  | 0 | 12:20 | 5.93  | 5.93  | 0.000 |
| EX-0   | JUNCTION | 25.97  | 25.97   | 0 | 12:15 | 0.446 | 0.446 | 0.000 |
| EX-1   | JUNCTION | 23.17  | 23.17   | 0 | 12:20 | 0.483 | 0.483 | 0.000 |
| EX-2   | JUNCTION | 3.71   | 3.71    | 0 | 12:15 | 0.109 | 0.109 | 0.000 |
| EX-4A  | JUNCTION | 89.03  | 89.03   | 0 | 12:35 | 3.87  | 3.87  | 0.000 |
| EX-10A | JUNCTION | 100.09 | 100.09  | 0 | 12:30 | 3.39  | 3.39  | 0.000 |
| EX-9   | JUNCTION | 89.43  | 89.43   | 0 | 12:25 | 2.99  | 2.99  | 0.000 |
| EX-8   | JUNCTION | 42.58  | 42.58   | 0 | 12:20 | 0.833 | 0.833 | 0.000 |
| EX-7   | JUNCTION | 123.98 | 123.98  | 0 | 12:25 | 3.92  | 3.92  | 0.000 |
| EX-5   | JUNCTION | 128.18 | 128.18  | 0 | 12:25 | 3.88  | 3.88  | 0.000 |
| EX-12  | JUNCTION | 53.72  | 53.72   | 0 | 12:15 | 0.902 | 0.902 | 0.000 |
| EX-11  | JUNCTION | 177.16 | 177.16  | 0 | 12:25 | 3.95  | 3.95  | 0.000 |
| EX-13  | JUNCTION | 59.34  | 59.34   | 0 | 12:25 | 1.95  | 1.95  | 0.000 |
| EX-24  | JUNCTION | 50.91  | 50.91   | 0 | 12:20 | 1.4   | 1.4   | 0.000 |
| EX-25  | JUNCTION | 31.44  | 31.44   | 0 | 12:25 | 1.03  | 1.03  | 0.000 |
| DP-53A | OUTFALL  | 0.00   | 1837.86 | 0 | 13:10 | 0     | 72.3  | 0.000 |
| DP-9A  | OUTFALL  | 0.00   | 321.39  | 0 | 12:34 | 0     | 8.95  | 0.000 |
| DP-1   | OUTFALL  | 0.00   | 25.97   | 0 | 12:15 | 0     | 0.446 | 0.000 |
| DP-2   | OUTFALL  | 0.00   | 23.17   | 0 | 12:20 | 0     | 0.483 | 0.000 |
| DP-4   | OUTFALL  | 0.00   | 123.98  | 0 | 12:25 | 0     | 3.92  | 0.000 |
| DP-5   | OUTFALL  | 0.00   | 42.58   | 0 | 12:20 | 0     | 0.833 | 0.000 |
| DP-6   | OUTFALL  | 0.00   | 89.43   | 0 | 12:25 | 0     | 2.99  | 0.000 |
| DP-7   | OUTFALL  | 0.00   | 273.43  | 0 | 12:44 | 0     | 10.7  | 0.000 |
| DP-3   | OUTFALL  | 0.00   | 3.71    | 0 | 12:15 | 0     | 0.109 | 0.000 |
| DP-8   | OUTFALL  | 0.00   | 245.12  | 0 | 12:28 | 0     | 6.84  | 0.000 |

\*\*\*\*\*

Node Flooding Summary

\*\*\*\*\*

No nodes were flooded.

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| DP-53A       | 50.89             | 67.64           | 1837.86         | 72.290                   |
| DP-9A        | 31.90             | 13.36           | 321.39          | 8.952                    |
| DP-1         | 2.55              | 8.31            | 25.97           | 0.446                    |
| DP-2         | 2.98              | 7.71            | 23.17           | 0.483                    |
| DP-4         | 32.64             | 5.71            | 123.98          | 3.915                    |
| DP-5         | 29.70             | 1.33            | 42.58           | 0.833                    |
| DP-6         | 32.83             | 4.33            | 89.43           | 2.987                    |
| DP-7         | 14.07             | 36.27           | 273.43          | 10.719                   |
| DP-3         | 4.25              | 1.22            | 3.71            | 0.109                    |
| DP-8         | 29.93             | 10.88           | 245.12          | 6.840                    |
| System       | 23.17             | 156.77          | 2455.20         | 107.573                  |

\*\*\*\*\*  
Link Flow Summary  
\*\*\*\*\*

| Link   | Type    | Maximum  Flow <br>CFS | Time of Occurrence<br>days hr:min | Maximum  Veloc <br>ft/sec | Max/ Full Flow | Max/ Full Depth |
|--------|---------|-----------------------|-----------------------------------|---------------------------|----------------|-----------------|
| RT-4   | CONDUIT | 287.68                | 0 12:31                           | 5.34                      | 0.00           | 0.10            |
| RT-1   | CONDUIT | 212.94                | 0 12:41                           | 5.08                      | 0.00           | 0.09            |
| RT-3   | CONDUIT | 148.46                | 0 12:27                           | 4.76                      | 0.00           | 0.08            |
| RT-2   | CONDUIT | 137.30                | 0 12:38                           | 4.70                      | 0.00           | 0.07            |
| RT-6   | CONDUIT | 238.46                | 0 12:28                           | 5.76                      | 0.00           | 0.09            |
| RT-5   | CONDUIT | 801.60                | 0 12:42                           | 7.47                      | 0.01           | 0.18            |
| RT-7   | CONDUIT | 358.68                | 0 12:42                           | 5.54                      | 0.00           | 0.12            |
| RT-10  | CONDUIT | 177.88                | 0 12:34                           | 5.12                      | 0.00           | 0.10            |
| RT-9   | CONDUIT | 1443.27               | 0 12:50                           | 7.70                      | 0.02           | 0.18            |
| RT-14  | CONDUIT | 107.56                | 0 12:44                           | 5.07                      | 0.00           | 0.09            |
| RT-13  | CONDUIT | 1645.84               | 0 13:11                           | 7.10                      | 0.03           | 0.19            |
| RT-12  | CONDUIT | 1626.98               | 0 13:08                           | 7.52                      | 0.03           | 0.18            |
| RT-18  | CONDUIT | 161.34                | 0 12:32                           | 4.56                      | 0.00           | 0.08            |
| RT-19  | CONDUIT | 292.62                | 0 12:35                           | 4.73                      | 0.01           | 0.14            |
| RT-11  | CONDUIT | 1593.34               | 0 13:01                           | 7.77                      | 0.04           | 0.19            |
| RT-15  | CONDUIT | 252.44                | 0 12:40                           | 6.13                      | 0.01           | 0.12            |
| RT-8   | CONDUIT | 1407.11               | 0 12:44                           | 7.96                      | 0.03           | 0.22            |
| RT-16  | CONDUIT | 190.35                | 0 12:48                           | 4.96                      | 0.00           | 0.09            |
| RT-17  | CONDUIT | 54.28                 | 0 12:41                           | 3.05                      | 0.00           | 0.07            |
| RT-17A | CONDUIT | 207.70                | 0 12:31                           | 7.29                      | 0.00           | 0.09            |
| 32     | DUMMY   | 74.06                 | 0 12:25                           |                           |                |                 |
| 33     | DUMMY   | 87.48                 | 0 12:25                           |                           |                |                 |
| 34     | DUMMY   | 133.97                | 0 12:25                           |                           |                |                 |
| 35     | DUMMY   | 162.20                | 0 12:35                           |                           |                |                 |
| 36     | DUMMY   | 81.51                 | 0 12:25                           |                           |                |                 |
| 37     | DUMMY   | 144.84                | 0 12:25                           |                           |                |                 |
| 38     | DUMMY   | 36.26                 | 0 12:20                           |                           |                |                 |
| 39     | DUMMY   | 192.52                | 0 12:20                           |                           |                |                 |

|    |       |        |   |       |
|----|-------|--------|---|-------|
| 40 | DUMMY | 25.97  | 0 | 12:15 |
| 41 | DUMMY | 23.17  | 0 | 12:20 |
| 42 | DUMMY | 3.71   | 0 | 12:15 |
| 43 | DUMMY | 89.03  | 0 | 12:35 |
| 44 | DUMMY | 100.09 | 0 | 12:30 |
| 45 | DUMMY | 89.43  | 0 | 12:25 |
| 46 | DUMMY | 42.58  | 0 | 12:20 |
| 47 | DUMMY | 123.98 | 0 | 12:25 |
| 48 | DUMMY | 128.18 | 0 | 12:25 |
| 49 | DUMMY | 177.16 | 0 | 12:25 |
| 50 | DUMMY | 59.34  | 0 | 12:25 |
| 51 | DUMMY | 53.72  | 0 | 12:15 |
| 52 | DUMMY | 50.91  | 0 | 12:20 |
| 53 | DUMMY | 31.44  | 0 | 12:25 |

\*\*\*\*\*

Conduit Surcharge Summary

\*\*\*\*\*

No conduits were surcharged.

Analysis begun on: Thu Sep 02 14:54:25 2021

Analysis ended on: Thu Sep 02 14:54:25 2021

Total elapsed time: < 1 sec

EPA STORM WATER MANAGEMENT MODEL - VERSION 5.1 (Build 5.1.012)

-----  
WARNING 04: minimum elevation drop used for Conduit 32  
WARNING 04: minimum elevation drop used for Conduit 33  
WARNING 04: minimum elevation drop used for Conduit 34  
WARNING 04: minimum elevation drop used for Conduit 35  
WARNING 04: minimum elevation drop used for Conduit 36  
WARNING 04: minimum elevation drop used for Conduit 37  
WARNING 04: minimum elevation drop used for Conduit 38  
WARNING 04: minimum elevation drop used for Conduit 39  
WARNING 04: minimum elevation drop used for Conduit 40  
WARNING 04: minimum elevation drop used for Conduit 41  
WARNING 04: minimum elevation drop used for Conduit 42  
WARNING 04: minimum elevation drop used for Conduit 43  
WARNING 04: minimum elevation drop used for Conduit 44  
WARNING 04: minimum elevation drop used for Conduit 45  
WARNING 04: minimum elevation drop used for Conduit 46  
WARNING 04: minimum elevation drop used for Conduit 47  
WARNING 04: minimum elevation drop used for Conduit 48  
WARNING 04: minimum elevation drop used for Conduit 49  
WARNING 04: minimum elevation drop used for Conduit 50  
WARNING 04: minimum elevation drop used for Conduit 51  
WARNING 04: minimum elevation drop used for Conduit 52  
WARNING 04: minimum elevation drop used for Conduit 53

\*\*\*\*\*  
NOTE: The summary statistics displayed in this report are  
based on results found at every computational time step,  
not just on results from each reporting time step.  
\*\*\*\*\*

\*\*\*\*\*

Analysis Options

\*\*\*\*\*

Flow Units ..... CFS  
Process Models:  
  Rainfall/Runoff ..... NO  
  RDII ..... NO  
  Snowmelt ..... NO  
  Groundwater ..... NO  
  Flow Routing ..... YES  
  Ponding Allowed ..... NO  
  Water Quality ..... NO  
Flow Routing Method ..... KINWAVE  
Starting Date ..... 01/01/2005 00:00:00  
Ending Date ..... 01/04/2005 06:00:00  
Antecedent Dry Days ..... 0.0  
Report Time Step ..... 00:05:00  
Routing Time Step ..... 30.00 sec

```

*****
Flow Routing Continuity      Volume      Volume
                             acre-feet  10^6 gal
*****
Dry Weather Inflow .....    0.000    0.000
Wet Weather Inflow .....    0.000    0.000
Groundwater Inflow .....    0.000    0.000
RDII Inflow .....          0.000    0.000
External Inflow .....      383.667   125.024
External Outflow .....     389.413   126.896
Flooding Loss .....        0.000    0.000
Evaporation Loss .....     0.000    0.000
Exfiltration Loss .....    0.000    0.000
Initial Stored Volume ....  0.000    0.000
Final Stored Volume .....  0.000    0.000
Continuity Error (%) ..... -1.498

```

```

*****
Highest Flow Instability Indexes
*****

```

All links are stable.

```

*****
Routing Time Step Summary
*****

```

```

Minimum Time Step      : 30.00 sec
Average Time Step      : 30.00 sec
Maximum Time Step      : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging  : 0.00

```

```

*****
Node Depth Summary
*****

```

| Node  | Type     | Average Depth | Maximum Depth | Maximum HGL | Time of Occurrence | Max Depth | Reported Max Depth |
|-------|----------|---------------|---------------|-------------|--------------------|-----------|--------------------|
| EX-3  | JUNCTION | 0.05          | 2.06          | 212.06      | 0 12:25            | 2.05      | 2.05               |
| EX-4  | JUNCTION | 0.05          | 2.21          | 262.21      | 0 12:25            | 2.21      | 2.21               |
| EX-10 | JUNCTION | 0.06          | 1.95          | 139.95      | 0 12:30            | 1.95      | 1.95               |
| EX-20 | JUNCTION | 0.03          | 1.89          | 97.89       | 0 12:20            | 1.88      | 1.88               |
| EX-79 | JUNCTION | 0.05          | 1.99          | 523.99      | 0 12:20            | 1.98      | 1.98               |
| EX-80 | JUNCTION | 0.05          | 1.69          | 513.69      | 0 12:25            | 1.69      | 1.69               |
| EX-81 | JUNCTION | 0.05          | 2.01          | 494.01      | 0 12:30            | 2.00      | 2.00               |
| EX-82 | JUNCTION | 0.03          | 1.69          | 523.69      | 0 12:20            | 1.68      | 1.68               |
| DP-10 | JUNCTION | 0.10          | 2.59          | 76.59       | 0 12:34            | 2.59      | 2.59               |
| DP-56 | JUNCTION | 0.05          | 1.90          | 73.90       | 0 12:27            | 1.90      | 1.90               |



|        |          |      |      |        |   |       |      |
|--------|----------|------|------|--------|---|-------|------|
| DP-60A | JUNCTION | 0.13 | 4.10 | 26.10  | 0 | 13:06 | 4.09 |
| DP-63  | JUNCTION | 0.12 | 4.22 | 100.22 | 0 | 12:59 | 4.21 |
| DP-69  | JUNCTION | 0.12 | 4.32 | 196.32 | 0 | 12:48 | 4.32 |
| DP-71  | JUNCTION | 0.13 | 4.68 | 262.68 | 0 | 12:43 | 4.68 |
| DP-73  | JUNCTION | 0.13 | 4.69 | 304.69 | 0 | 12:40 | 4.69 |
| EX-74  | JUNCTION | 0.05 | 2.27 | 459.27 | 0 | 12:24 | 2.27 |
| EX-75  | JUNCTION | 0.11 | 3.85 | 395.85 | 0 | 12:34 | 3.84 |
| EX-78  | JUNCTION | 0.07 | 2.73 | 424.73 | 0 | 12:25 | 2.73 |
| DP-8A  | JUNCTION | 0.04 | 1.51 | 105.51 | 0 | 12:25 | 1.50 |
| DP-9   | JUNCTION | 0.09 | 3.01 | 25.01  | 0 | 12:29 | 3.01 |
| EX-76  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 | 00:00 | 0.00 |
| EX-73  | JUNCTION | 0.00 | 0.00 | 392.00 | 0 | 00:00 | 0.00 |
| EX-88  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 | 00:00 | 0.00 |
| EX-77  | JUNCTION | 0.00 | 0.00 | 300.00 | 0 | 00:00 | 0.00 |
| EX-6   | JUNCTION | 0.00 | 0.00 | 258.00 | 0 | 00:00 | 0.00 |
| EX-20A | JUNCTION | 0.00 | 0.00 | 22.00  | 0 | 00:00 | 0.00 |
| EX-21  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-3A  | JUNCTION | 0.00 | 0.00 | 74.00  | 0 | 00:00 | 0.00 |
| EX-0   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-1   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-2   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-4A  | JUNCTION | 0.00 | 0.00 | 96.00  | 0 | 00:00 | 0.00 |
| EX-10A | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-9   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-8   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-7   | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-5   | JUNCTION | 0.00 | 0.00 | 192.00 | 0 | 00:00 | 0.00 |
| EX-12  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| EX-11  | JUNCTION | 0.00 | 0.00 | 72.00  | 0 | 00:00 | 0.00 |
| EX-13  | JUNCTION | 0.00 | 0.00 | 104.00 | 0 | 00:00 | 0.00 |
| EX-24  | JUNCTION | 0.00 | 0.00 | 22.00  | 0 | 00:00 | 0.00 |
| EX-25  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-53A | OUTFALL  | 0.16 | 4.09 | 4.09   | 0 | 13:09 | 4.09 |
| DP-9A  | OUTFALL  | 0.08 | 2.99 | 2.99   | 0 | 12:34 | 2.99 |
| DP-1   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-2   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-4   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-5   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-6   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-7   | OUTFALL  | 0.06 | 1.87 | 1.87   | 0 | 12:47 | 1.87 |
| DP-3   | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| DP-8   | OUTFALL  | 0.04 | 1.90 | 1.90   | 0 | 12:29 | 1.90 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

---

| Node | Type | Maximum Lateral Inflow | Maximum Total Inflow | Maximum Time of Occurrence | Lateral Inflow Volume | Total Inflow Volume | Flow Balance Error |
|------|------|------------------------|----------------------|----------------------------|-----------------------|---------------------|--------------------|
|      |      | CFS                    | CFS                  | days hr:min                | 10 <sup>6</sup> gal   | 10 <sup>6</sup> gal | Percent            |

|        |          |        |         |   |       |       |       |        |
|--------|----------|--------|---------|---|-------|-------|-------|--------|
| EX-3   | JUNCTION | 149.59 | 149.59  | 0 | 12:25 | 4.22  | 4.22  | 0.000  |
| EX-4   | JUNCTION | 221.22 | 221.22  | 0 | 12:25 | 5.92  | 5.92  | 0.000  |
| EX-10  | JUNCTION | 247.82 | 247.82  | 0 | 12:30 | 8.45  | 8.45  | 0.000  |
| EX-20  | JUNCTION | 214.98 | 214.98  | 0 | 12:20 | 4.37  | 4.37  | 0.000  |
| EX-79  | JUNCTION | 299.69 | 299.69  | 0 | 12:20 | 6.12  | 6.12  | 0.000  |
| EX-80  | JUNCTION | 181.71 | 181.71  | 0 | 12:25 | 4.79  | 4.79  | -0.000 |
| EX-81  | JUNCTION | 267.18 | 267.18  | 0 | 12:30 | 8.02  | 8.02  | 0.000  |
| EX-82  | JUNCTION | 186.82 | 186.82  | 0 | 12:20 | 3.59  | 3.59  | 0.000  |
| DP-10  | JUNCTION | 0.00   | 300.10  | 0 | 12:34 | 0     | 11.2  | 0.000  |
| DP-56  | JUNCTION | 0.00   | 252.85  | 0 | 12:27 | 0     | 7.17  | 0.000  |
| DP-60A | JUNCTION | 0.00   | 1969.24 | 0 | 13:06 | 0     | 72.3  | 0.000  |
| DP-63  | JUNCTION | 0.00   | 1980.73 | 0 | 12:59 | 0     | 70.5  | 0.000  |
| DP-69  | JUNCTION | 0.00   | 1988.41 | 0 | 12:48 | 0     | 65.5  | 0.000  |
| DP-71  | JUNCTION | 0.00   | 1734.92 | 0 | 12:43 | 0     | 54.9  | 0.000  |
| DP-73  | JUNCTION | 0.00   | 1672.02 | 0 | 12:40 | 0     | 52.1  | 0.000  |
| EX-74  | JUNCTION | 197.86 | 352.34  | 0 | 12:24 | 4.05  | 7.67  | -0.000 |
| EX-75  | JUNCTION | 85.81  | 970.48  | 0 | 12:34 | 2.68  | 29.1  | 0.000  |
| EX-78  | JUNCTION | 245.43 | 497.68  | 0 | 12:25 | 5.27  | 11.4  | 0.000  |
| DP-8A  | JUNCTION | 0.00   | 70.54   | 0 | 12:25 | 0     | 2.32  | 0.000  |
| DP-9   | JUNCTION | 0.00   | 351.65  | 0 | 12:29 | 0     | 9.41  | 0.000  |
| EX-76  | JUNCTION | 86.18  | 86.18   | 0 | 12:25 | 2.84  | 2.84  | 0.000  |
| EX-73  | JUNCTION | 101.98 | 101.98  | 0 | 12:25 | 2.85  | 2.85  | 0.000  |
| EX-88  | JUNCTION | 156.62 | 156.62  | 0 | 12:25 | 4.23  | 4.23  | 0.000  |
| EX-77  | JUNCTION | 190.53 | 190.53  | 0 | 12:35 | 7.02  | 7.02  | 0.000  |
| EX-6   | JUNCTION | 95.34  | 95.34   | 0 | 12:25 | 2.75  | 2.75  | 0.000  |
| EX-20A | JUNCTION | 171.92 | 171.92  | 0 | 12:25 | 4.95  | 4.95  | 0.000  |
| EX-21  | JUNCTION | 41.94  | 41.94   | 0 | 12:20 | 1.16  | 1.16  | 0.000  |
| EX-3A  | JUNCTION | 223.40 | 223.40  | 0 | 12:20 | 6.86  | 6.86  | 0.000  |
| EX-0   | JUNCTION | 31.45  | 31.45   | 0 | 12:15 | 0.543 | 0.543 | 0.000  |
| EX-1   | JUNCTION | 27.93  | 27.93   | 0 | 12:20 | 0.588 | 0.588 | 0.000  |
| EX-2   | JUNCTION | 4.52   | 4.52    | 0 | 12:15 | 0.132 | 0.132 | 0.000  |
| EX-4A  | JUNCTION | 104.76 | 104.76  | 0 | 12:35 | 4.58  | 4.58  | 0.000  |
| EX-10A | JUNCTION | 121.64 | 121.64  | 0 | 12:30 | 4.13  | 4.13  | 0.000  |
| EX-9   | JUNCTION | 106.57 | 106.57  | 0 | 12:25 | 3.56  | 3.56  | 0.000  |
| EX-8   | JUNCTION | 50.92  | 50.92   | 0 | 12:20 | 1.01  | 1.01  | 0.000  |
| EX-7   | JUNCTION | 147.04 | 147.04  | 0 | 12:25 | 4.64  | 4.64  | 0.000  |
| EX-5   | JUNCTION | 150.41 | 150.41  | 0 | 12:25 | 4.59  | 4.59  | 0.000  |
| EX-12  | JUNCTION | 63.35  | 63.35   | 0 | 12:15 | 1.07  | 1.07  | 0.000  |
| EX-11  | JUNCTION | 213.92 | 213.92  | 0 | 12:25 | 4.82  | 4.82  | 0.000  |
| EX-13  | JUNCTION | 70.54  | 70.54   | 0 | 12:25 | 2.32  | 2.32  | 0.000  |
| EX-24  | JUNCTION | 60.43  | 60.43   | 0 | 12:20 | 1.67  | 1.67  | 0.000  |
| EX-25  | JUNCTION | 38.17  | 38.17   | 0 | 12:25 | 1.25  | 1.25  | 0.000  |
| DP-53A | OUTFALL  | 0.00   | 2197.66 | 0 | 13:08 | 0     | 84.9  | 0.000  |
| DP-9A  | OUTFALL  | 0.00   | 381.11  | 0 | 12:33 | 0     | 10.6  | 0.000  |
| DP-1   | OUTFALL  | 0.00   | 31.45   | 0 | 12:15 | 0     | 0.543 | 0.000  |
| DP-2   | OUTFALL  | 0.00   | 27.93   | 0 | 12:20 | 0     | 0.588 | 0.000  |
| DP-4   | OUTFALL  | 0.00   | 147.04  | 0 | 12:25 | 0     | 4.64  | 0.000  |
| DP-5   | OUTFALL  | 0.00   | 50.92   | 0 | 12:20 | 0     | 1.01  | 0.000  |
| DP-6   | OUTFALL  | 0.00   | 106.57  | 0 | 12:25 | 0     | 3.56  | 0.000  |
| DP-7   | OUTFALL  | 0.00   | 326.28  | 0 | 12:44 | 0     | 12.7  | 0.000  |
| DP-3   | OUTFALL  | 0.00   | 4.52    | 0 | 12:15 | 0     | 0.132 | 0.000  |
| DP-8   | OUTFALL  | 0.00   | 297.43  | 0 | 12:28 | 0     | 8.25  | 0.000  |

\*\*\*\*\*

Node Flooding Summary

\*\*\*\*\*

No nodes were flooded.

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq | Avg Flow Pcnt | Max Flow CFS | Total Volume 10^6 gal |
|--------------|-----------|---------------|--------------|-----------------------|
| DP-53A       | 51.14     | 78.99         | 2197.66      | 84.854                |
| DP-9A        | 32.08     | 15.69         | 381.11       | 10.572                |
| DP-1         | 2.55      | 10.13         | 31.45        | 0.543                 |
| DP-2         | 2.98      | 9.40          | 27.93        | 0.588                 |
| DP-4         | 32.77     | 6.74          | 147.04       | 4.637                 |
| DP-5         | 29.89     | 1.61          | 50.92        | 1.008                 |
| DP-6         | 32.96     | 5.14          | 106.57       | 3.555                 |
| DP-7         | 15.14     | 40.08         | 326.28       | 12.745                |
| DP-3         | 4.25      | 1.48          | 4.52         | 0.132                 |
| DP-8         | 30.10     | 13.05         | 297.43       | 8.251                 |
| System       | 23.39     | 182.30        | 2955.71      | 126.887               |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link  | Type    | Maximum  Flow  CFS | Time of Occurrence days hr:min | Max  Veloc  ft/sec | Maximum Full Flow | Max/ Full Flow | Max/ Full Depth |
|-------|---------|--------------------|--------------------------------|--------------------|-------------------|----------------|-----------------|
| RT-4  | CONDUIT | 337.89             | 0 12:31                        | 5.55               | 0.00              | 0.11           |                 |
| RT-1  | CONDUIT | 251.20             | 0 12:40                        | 5.29               | 0.00              | 0.10           |                 |
| RT-3  | CONDUIT | 173.98             | 0 12:27                        | 4.94               | 0.00              | 0.08           |                 |
| RT-2  | CONDUIT | 161.46             | 0 12:38                        | 4.88               | 0.00              | 0.08           |                 |
| RT-6  | CONDUIT | 278.31             | 0 12:28                        | 5.97               | 0.00              | 0.10           |                 |
| RT-5  | CONDUIT | 945.90             | 0 12:41                        | 7.78               | 0.02              | 0.19           |                 |
| RT-7  | CONDUIT | 423.39             | 0 12:41                        | 5.75               | 0.01              | 0.13           |                 |
| RT-10 | CONDUIT | 209.08             | 0 12:34                        | 5.32               | 0.00              | 0.11           |                 |
| RT-9  | CONDUIT | 1709.59            | 0 12:49                        | 8.06               | 0.03              | 0.20           |                 |
| RT-14 | CONDUIT | 127.38             | 0 12:43                        | 5.28               | 0.00              | 0.09           |                 |
| RT-13 | CONDUIT | 1965.55            | 0 13:09                        | 7.47               | 0.03              | 0.20           |                 |
| RT-12 | CONDUIT | 1942.19            | 0 13:06                        | 7.91               | 0.03              | 0.20           |                 |

|        |         |         |   |       |      |      |      |
|--------|---------|---------|---|-------|------|------|------|
| RT-18  | CONDUIT | 190.02  | 0 | 12:32 | 4.74 | 0.00 | 0.09 |
| RT-19  | CONDUIT | 347.12  | 0 | 12:34 | 4.93 | 0.01 | 0.15 |
| RT-11  | CONDUIT | 1898.12 | 0 | 12:59 | 8.18 | 0.04 | 0.21 |
| RT-15  | CONDUIT | 297.12  | 0 | 12:40 | 6.39 | 0.01 | 0.13 |
| RT-8   | CONDUIT | 1663.86 | 0 | 12:43 | 8.31 | 0.03 | 0.23 |
| RT-16  | CONDUIT | 224.77  | 0 | 12:47 | 5.16 | 0.00 | 0.09 |
| RT-17  | CONDUIT | 64.98   | 0 | 12:40 | 3.19 | 0.00 | 0.07 |
| RT-17A | CONDUIT | 252.10  | 0 | 12:29 | 7.66 | 0.00 | 0.10 |
| 32     | DUMMY   | 86.18   | 0 | 12:25 |      |      |      |
| 33     | DUMMY   | 101.98  | 0 | 12:25 |      |      |      |
| 34     | DUMMY   | 156.62  | 0 | 12:25 |      |      |      |
| 35     | DUMMY   | 190.53  | 0 | 12:35 |      |      |      |
| 36     | DUMMY   | 95.34   | 0 | 12:25 |      |      |      |
| 37     | DUMMY   | 171.92  | 0 | 12:25 |      |      |      |
| 38     | DUMMY   | 41.94   | 0 | 12:20 |      |      |      |
| 39     | DUMMY   | 223.40  | 0 | 12:20 |      |      |      |
| 40     | DUMMY   | 31.45   | 0 | 12:15 |      |      |      |
| 41     | DUMMY   | 27.93   | 0 | 12:20 |      |      |      |
| 42     | DUMMY   | 4.52    | 0 | 12:15 |      |      |      |
| 43     | DUMMY   | 104.76  | 0 | 12:35 |      |      |      |
| 44     | DUMMY   | 121.64  | 0 | 12:30 |      |      |      |
| 45     | DUMMY   | 106.57  | 0 | 12:25 |      |      |      |
| 46     | DUMMY   | 50.92   | 0 | 12:20 |      |      |      |
| 47     | DUMMY   | 147.04  | 0 | 12:25 |      |      |      |
| 48     | DUMMY   | 150.41  | 0 | 12:25 |      |      |      |
| 49     | DUMMY   | 213.92  | 0 | 12:25 |      |      |      |
| 50     | DUMMY   | 70.54   | 0 | 12:25 |      |      |      |
| 51     | DUMMY   | 63.35   | 0 | 12:15 |      |      |      |
| 52     | DUMMY   | 60.43   | 0 | 12:20 |      |      |      |
| 53     | DUMMY   | 38.17   | 0 | 12:25 |      |      |      |

\*\*\*\*\*

Conduit Surcharge Summary

\*\*\*\*\*

No conduits were surcharged.

Analysis begun on: Thu Aug 12 12:23:21 2021


Analysis ended on: Thu Aug 12 12:23:21 2021

Total elapsed time: < 1 sec

**APPENDIX C**

**PROPOSED CONDITIONS HYDRAULIC CALCULATIONS**

| Basin Update Summary |             |           |                |           |
|----------------------|-------------|-----------|----------------|-----------|
| Basin                | MDDP (2018) |           | Updated (2021) |           |
|                      | Area (ac)   | Imperv. % | Area (ac)      | Imperv. % |
| SC3-1A               | 27.8        | 32%       | 27.8           | 32%       |
| SC3-5A               | 39.1        | 61%       | 39.1           | 61%       |
| SC3-5B               | 63.0        | 54%       | 63.0           | 54%       |
| SC3-6A               | 49.3        | 71%       | 49.3           | 71%       |
| SC3-6B               | 30.9        | 58%       | 30.9           | 58%       |
| SC3-6C               | 58.0        | 46%       | 62.1           | 47%       |
| SC3-7                | 45.7        | 72%       | 45.7           | 72%       |
| SC3-8                | 143.4       | 2%        | 143.4          | 2%        |
| SC3-9                | 217.4       | 15%       | 217.4          | 15%       |
| SC3-10               | 36.0        | 8%        | 36.0           | 8%        |
| SC3-11A              | 10.7        | 17%       | 7.7            | 5%        |
| SC3-11B              | 76.6        | 39%       | 75.9           | 66%       |
| SC3-12               | 88.2        | 55%       | 54.9           | 55%       |
| SC3-12A              |             |           | 16.9           | 44%       |
| SC3-12B              |             |           | 16.6           | 3%        |
| SC3-13               | 41.0        | 65%       | 41.0           | 65%       |
| SC3-13A              |             |           | 28.1           | 3%        |
| SC3-14A              | 164.9       | 40%       | 137.9          | 63%       |
| SC3-14B              | 34.7        | 65%       | 64.0           | 69%       |
| SC3-15A              | 139.7       | 3%        | 128.7          | 3%        |
| SC3-15B              | 7.9         | 60%       | 7.9            | 60%       |
| SC3-16A              | 168.1       | 51%       | 178.8          | 69%       |
| SC3-16B              | 50.7        | 67%       | 51.5           | 75%       |
| SC3-17               | 70.6        | 29%       | 27.8           | 61%       |
| SC3-17B              |             |           | 30.3           | 62%       |
| SC3-18               | 53.8        | 44%       | 22.7           | 3%        |
| SC3-18B              |             |           | 19.4           | 51%       |
| SC3-19               | 184.0       | 4%        | 201.6          | 4%        |
| SC3-20               | 34.2        | 12%       | 37.1           | 12%       |
| SC3-21               | 23.3        | 16%       | 23.7           | 16%       |
| SC3-22               | 33.9        | 12%       | 28.9           | 12%       |
| SC3-23               | 14.5        | 19%       | 28.0           | 19%       |
| SC3-24A              | 35.7        | 10%       | 36.0           | 10%       |
| SC3-24B              | 12.2        | 9%        | 10.6           | 9%        |
| SC3-25               | 19.0        | 15%       | 14.9           | 15%       |
| SC3-26               | 10.0        | 3%        | 12.7           | 6%        |
| SC3-27               | 70.0        | 28%       | 65.0           | 22%       |
| SC3-61               | 65.5        | 10%       | 65.5           | 10%       |
| SC3-72               | 56.2        | 8%        | 56.2           | 8%        |
| SC3-73               | 90.0        | 5%        | 90.0           | 5%        |
| SC3-74               | 119.7       | 10%       | 119.7          | 10%       |
| SC3-75               | 79.3        | 10%       | 79.3           | 10%       |
| SC3-76               | 86.4        | 8%        | 86.4           | 8%        |
| SC3-77               | 106.9       | 2%        | 106.9          | 2%        |
| SC3-78               | 155.6       | 10%       | 155.6          | 10%       |
| SC3-79               | 189.0       | 7%        | 189.0          | 7%        |
| SC3-80               | 147.7       | 7%        | 147.7          | 7%        |
| SC3-81               | 262.9       | 2%        | 262.9          | 2%        |
| SC3-82               | 117.8       | 2%        | 117.8          | 2%        |
| SC3-88               | 60.2        | 2%        | 60.2           | 2%        |
| SC3-89               | 27.5        | 2%        | 23.3           | 2%        |
| SCE-1                | 64.4        | 14%       | 64.4           | 14%       |
| SCE-2                | 15          | 10%       | 15.0           | 10%       |
| SCE-3                | 67.5        | 25%       | 67.5           | 25%       |
| SCE-4                | 29.5        | 25%       | 29.5           | 25%       |
| SCE-5                | 85.5        | 70%       | 93.6           | 70%       |
| SCE-6                | 3.8         | 10%       | 4.2            | 10%       |
| SCE-7                | 44.9        | 76%       | 27.3           | 76%       |
| SCE-8                | 25.5        | 95%       | 25.5           | 95%       |
| SCE-9                | 4           | 10%       | 4.2            | 10%       |
| SCE-10               | 174.3       | 45%       | 164.4          | 45%       |
| SCE-11               | 5.8         | 10%       | 5.8            | 10%       |
| SCE-13               | 78.6        | 10%       | 78.6           | 10%       |
| SCE-14               | 52.5        | 10%       | 52.5           | 10%       |
| SCE-15               | 39.7        | 20%       | 39.7           | 20%       |

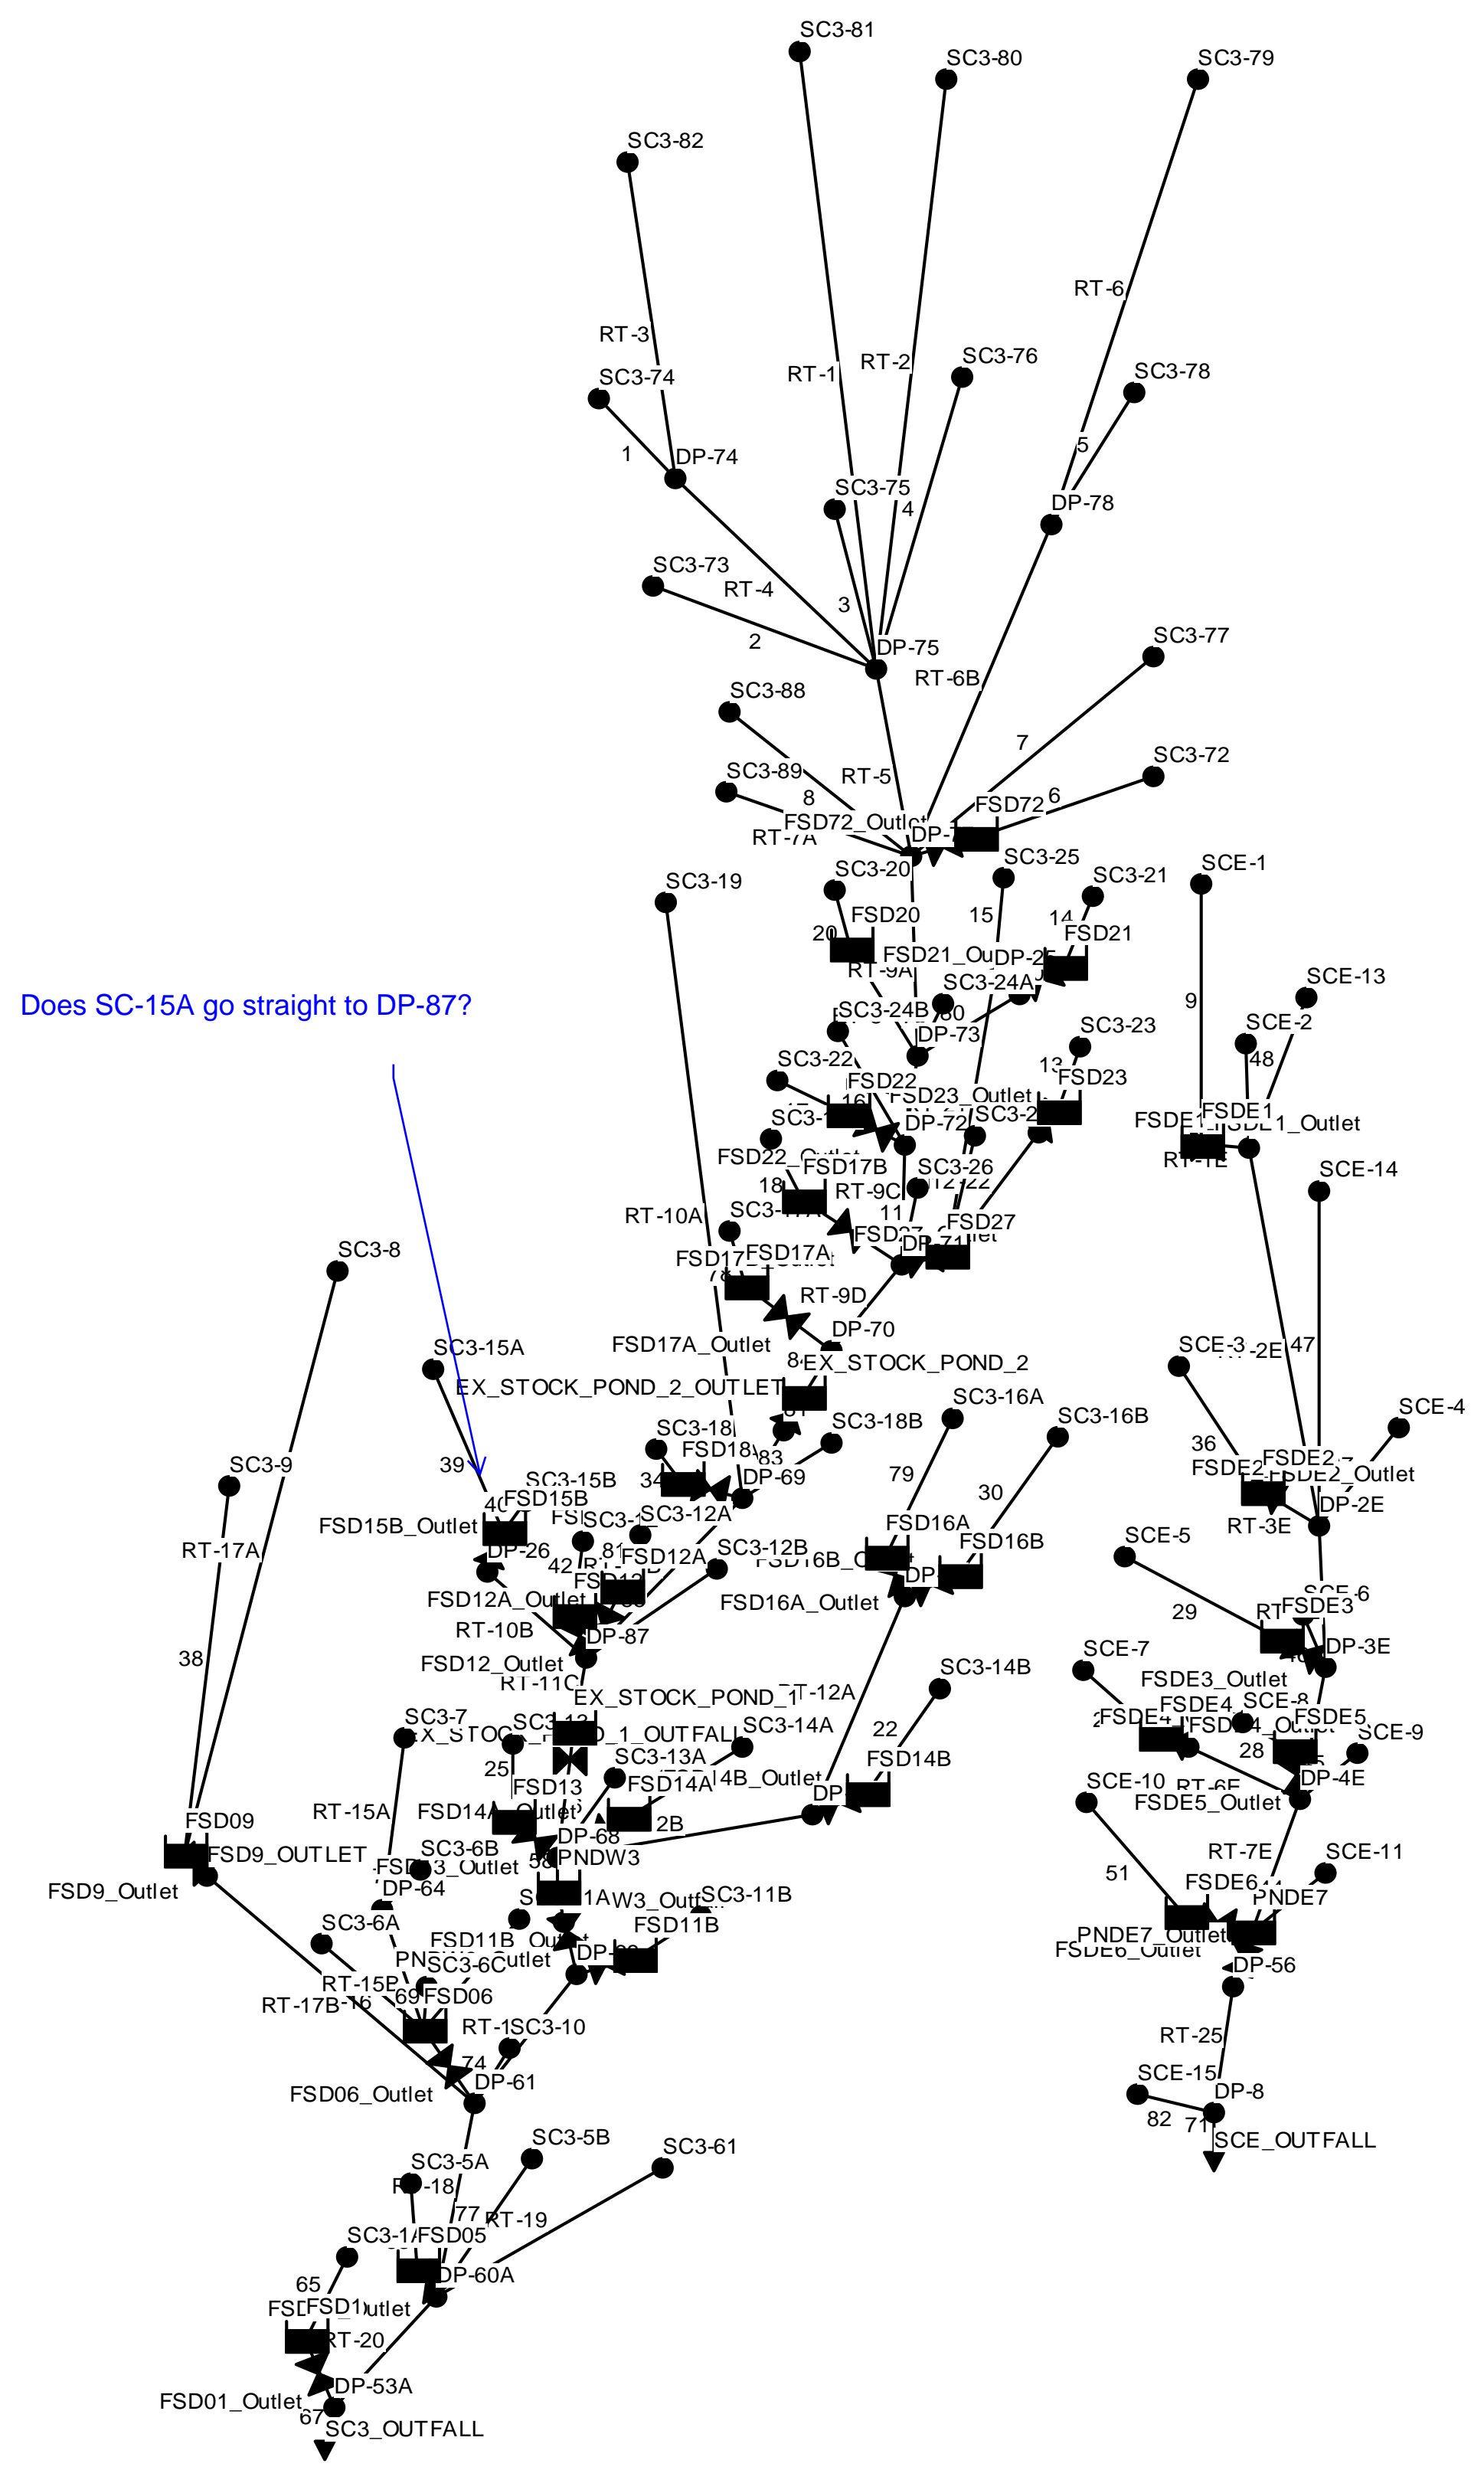

Does SC-15A go straight to DP-87?





**Sterling Ranch Master Development Drainage Plan**  
**Sand Creek Basin - Developed Condition - Lag Time Calculations**

8/21/2018

| Basin ID | OVERLAND FLOW |      |             |           |          | SHALLOW GUTTER FLOW |           |           |          | SHALLOW CHANNEL FLOW |           |           |          | STORM SEWER FLOW |           |           |          | CHANNELIZED FLOW |           |           |          | Tc Total (min) | Tlag 0.6*Tc (min) |
|----------|---------------|------|-------------|-----------|----------|---------------------|-----------|-----------|----------|----------------------|-----------|-----------|----------|------------------|-----------|-----------|----------|------------------|-----------|-----------|----------|----------------|-------------------|
|          | P2 (in)       | n    | Length (ft) | Slope (%) | Tt (min) | Length (ft)         | Slope (%) | Vel (fps) | Tt (min) | Length (ft)          | Slope (%) | Vel (fps) | Tt (min) | Length (ft)      | Slope (%) | Vel (fps) | Tt (min) | Length (ft)      | Slope (%) | Vel (fps) | Tt (min) |                |                   |
| SC3-1A   | 2.1           | 0.15 | 100         | 1.5       | 13.6     | 200                 | 1         | 0.5       | 1.5      | 0                    | 0         | 0         | 0        | 800              | 2.3       | 8         | 1.7      | 0                | 0         | 0         | 0        | 16.7           | 10.0              |
| SC3-5A   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 900                 | 2.0       | 2.0       | 2.9      | 0                    | 0         | 0         | 0        | 600              | 1.7       | 8         | 1.3      | 0                | 0         | 0         | 0        | 16.2           | 9.7               |
| SC3-5B   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 975                 | 2.5       | 2.5       | 3.1      | 0                    | 0         | 0         | 0        | 1250             | 1.0       | 6         | 3.5      | 0                | 0         | 0         | 0        | 18.7           | 11.2              |
| SC3-6A   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 1250                | 2.2       | 2.2       | 2.9      | 0                    | 0         | 0         | 0        | 1030             | 1.9       | 8         | 2.1      | 0                | 0         | 0         | 0        | 17.1           | 10.3              |
| SC3-6B   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 300                 | 2.0       | 2.0       | 2.8      | 0                    | 0         | 0         | 0        | 1300             | 2.2       | 8         | 2.7      | 0                | 0         | 0         | 0        | 17.6           | 10.6              |
| SC3-6C   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 950                 | 1.9       | 1.9       | 2.8      | 0                    | 0         | 0         | 0        | 1195             | 1.7       | 8         | 2.5      | 0                | 0         | 0         | 0        | 17.4           | 10.4              |
| SC3-7    | 2.1           | 0.15 | 100         | 3.0       | 10.3     | 0                   | 0         | 0         | 0        | 1175                 | 28        | 3.0       | 6.5      | 0                | 0         | 0         | 0        | 730              | 2.7       | 4.1       | 3.0      | 19.8           | 11.9              |
| SC3-8    | 2.1           | 0.15 | 300         | 3.8       | 22.5     | 0                   | 0         | 0         | 0        | 730                  | 40        | 3.5       | 3.5      | 0                | 0         | 0         | 0        | 2200             | 3.6       | 4.3       | 8.5      | 34.5           | 20.7              |
| SC3-9    | 2.1           | 0.15 | 300         | 4.0       | 22.1     | 0                   | 0         | 0         | 0        | 650                  | 20        | 2.7       | 4.0      | 0                | 0         | 0         | 0        | 4450             | 1.8       | 4.2       | 17.7     | 43.7           | 26.2              |
| SC3-10   | 2.1           | 0.15 | 250         | 3.2       | 20.9     | 0                   | 0         | 0         | 0        | 400                  | 20        | 3.5       | 1.9      | 0                | 0         | 0         | 0        | 1150             | 2.0       | 3.0       | 6.4      | 29.2           | 17.5              |
| SC3-11A  | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 280                 | 10        | 3.6       | 3.7      | 0                    | 0         | 0         | 0        | 100              | 2.0       | 8         | 0.2      | 0                | 0         | 0         | 0        | 16.0           | 9.6               |
| SC3-11B  | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 550                 | 12        | 2.2       | 2.9      | 0                    | 0         | 0         | 0        | 2700             | 1.6       | 8         | 5.6      | 0                | 0         | 0         | 0        | 20.6           | 12.4              |
| SC3-12   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 1000                | 30        | 3.0       | 3.5      | 0                    | 0         | 0         | 0        | 400              | 3.0       | 10        | 0.7      | 0                | 0         | 0         | 0        | 16.3           | 9.8               |
| SC3-13   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 820                 | 18        | 2.2       | 3.0      | 0                    | 0         | 0         | 0        | 1025             | 1.8       | 8         | 2.1      | 0                | 0         | 0         | 0        | 17.2           | 10.6              |
| SC3-14A  | 2.1           | 0.15 | 100         | 3.0       | 10.3     | 875                 | 22        | 2.5       | 3.0      | 0                    | 0         | 0         | 0        | 2575             | 1.8       | 8         | 5.4      | 0                | 0         | 0         | 0        | 18.6           | 11.2              |
| SC3-14B  | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 930                 | 22        | 2.4       | 3.1      | 0                    | 0         | 0         | 0        | 1050             | 2.3       | 8         | 2.2      | 0                | 0         | 0         | 0        | 17.4           | 10.4              |
| SC3-15A  | 2.1           | 0.15 | 300         | 5.3       | 19.7     | 0                   | 0         | 0         | 0        | 1100                 | 40        | 2.9       | 6.3      | 0                | 0         | 0         | 0        | 4163             | 2.5       | 4.1       | 16.9     | 42.9           | 25.8              |
| SC3-15B  | 2.1           | 0.15 | 50          | 2.0       | 6.9      | 1380                | 23        | 1.0       | 2.6      | 0                    | 0         | 0         | 0        | 0                | 0         | 0         | 0        | 315              | 3.8       | 4.1       | 1.3      | 10.8           | 6.5               |
| SC3-16A  | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 900                 | 28        | 3.1       | 3.5      | 0                    | 0         | 0         | 0        | 4485             | 2.3       | 8         | 9.3      | 0                | 0         | 0         | 0        | 24.9           | 15.0              |
| SC3-16B  | 2.1           | 0.15 | 100         | 3.0       | 10.3     | 0                   | 0         | 2.4       | 0        | 700                  | 20        | 3.4       | 3.4      | 1290             | 3.6       | 12        | 1.8      | 0                | 0         | 0         | 0        | 15.5           | 9.3               |
| SC3-17   | 2.1           | 0.15 | 100         | 3.0       | 10.3     | 0                   | 0         | 0         | 0        | 700                  | 20        | 3.4       | 3.4      | 1290             | 3.6       | 12        | 1.8      | 0                | 0         | 0         | 0        | 15.5           | 8.5               |
| SC3-18   | 2.1           | 0.15 | 100         | 3.0       | 10.3     | 0                   | 0         | 0         | 0        | 800                  | 22        | 3.4       | 3.9      | 200              | 4.0       | 12        | 0.3      | 0                | 0         | 0         | 0        | 14.5           | 8.6               |
| SC3-19   | 2.1           | 0.15 | 300         | 4.7       | 20.8     | 0                   | 0         | 0         | 0        | 770                  | 22        | 2.7       | 4.8      | 0                | 0         | 0         | 0        | 3900             | 3.0       | 4.0       | 16.3     | 41.8           | 25.1              |
| SC3-20   | 2.1           | 0.15 | 200         | 4.0       | 16.0     | 0                   | 0         | 0         | 0        | 70                   | 2         | 2.7       | 0.4      | 0                | 0         | 0         | 0        | 975              | 4.3       | 3.1       | 5.2      | 21.6           | 13.0              |
| SC3-21   | 2.1           | 0.15 | 200         | 4.0       | 16.0     | 0                   | 0         | 0         | 0        | 630                  | 26        | 3.1       | 3.4      | 0                | 0         | 0         | 0        | 875              | 3.4       | 3.4       | 4.3      | 23.6           | 14.2              |
| SC3-22   | 2.1           | 0.15 | 200         | 4.0       | 16.0     | 0                   | 0         | 0         | 0        | 400                  | 16        | 3.0       | 2.2      | 0                | 0         | 0         | 0        | 1350             | 2.8       | 3.4       | 6.6      | 24.8           | 14.9              |
| SC3-23   | 2.1           | 0.15 | 200         | 5.0       | 14.6     | 0                   | 0         | 0         | 0        | 275                  | 12        | 3.3       | 1.4      | 200              | 4.0       | 12        | 0.3      | 450              | 3.5       | 2.8       | 2.7      | 18.9           | 11.4              |
| SC3-24A  | 2.1           | 0.15 | 200         | 3.0       | 17.9     | 0                   | 0         | 0         | 0        | 495                  | 18        | 2.9       | 2.8      | 0                | 0         | 0         | 0        | 1780             | 1.6       | 2.9       | 10.2     | 31.0           | 18.6              |
| SC3-24B  | 2.1           | 0.15 | 200         | 3.0       | 17.9     | 0                   | 0         | 0         | 0        | 320                  | 14        | 3.3       | 1.6      | 0                | 0         | 0         | 0        | 930              | 4.5       | 2.9       | 5.3      | 24.9           | 14.9              |
| SC3-25   | 2.1           | 0.15 | 200         | 6.0       | 13.6     | 0                   | 0         | 0         | 0        | 340                  | 20        | 2.7       | 2.1      | 600              | 2.0       | 8         | 1.3      | 960              | 1.9       | 2.1       | 7.6      | 24.5           | 14.7              |
| SC3-26   | 2.1           | 0.15 | 100         | 2.0       | 12.1     | 0                   | 0         | 0         | 0        | 0                    | 0         | 0         | 0        | 0                | 0         | 0         | 0        | 1300             | 1.7       | 2.0       | 10.8     | 22.9           | 13.8              |
| SC3-27   | 2.1           | 0.15 | 100         | 3.0       | 10.3     | 900                 | 28.0      | 3.1       | 3.5      | 0                    | 0         | 0         | 0        | 1800             | 2.0       | 8         | 3.8      | 0                | 0         | 0         | 0        | 17.5           | 10.5              |
| SC3-61   | 2.1           | 0.15 | 200         | 3.0       | 17.9     | 0                   | 0         | 0         | 0        | 0                    | 0         | 0         | 0        | 0                | 0         | 0         | 0        | 2500             | 1.8       | 3.4       | 12.3     | 30.2           | 18.1              |
| SC3-72   | 2.1           | 0.15 | 250         | 4.0       | 19.1     | 0                   | 0         | 0         | 0        | 1025                 | 4.4       | 3.8       | 4.5      | 0                | 0         | 0         | 0        | 1595             | 4.4       | 4.0       | 6.6      | 30.2           | 18.1              |
| SC3-73   | 2.1           | 0.15 | 300         | 3.3       | 23.7     | 0                   | 0         | 0         | 0        | 1650                 | 3.3       | 2.9       | 9.5      | 0                | 0         | 0         | 0        | 1230             | 3.3       | 4.2       | 4.9      | 38.1           | 22.9              |
| SC3-74   | 2.1           | 0.15 | 300         | 4.7       | 20.8     | 0                   | 0         | 0         | 0        | 2000                 | 2.6       | 2.8       | 11.9     | 0                | 0         | 0         | 0        | 770              | 2.6       | 3.9       | 3.3      | 35.9           | 21.6              |
| SC3-75   | 2.1           | 0.15 | 300         | 3.3       | 23.7     | 0                   | 0         | 0         | 0        | 1200                 | 2.8       | 2.7       | 7.4      | 0                | 0         | 0         | 0        | 2300             | 2.8       | 3.1       | 12.4     | 43.5           | 26.1              |
| SC3-76   | 2.1           | 0.15 | 300         | 3.3       | 23.7     | 0                   | 0         | 0         | 0        | 1160                 | 2.6       | 3.1       | 6.2      | 0                | 0         | 0         | 0        | 3025             | 2.6       | 3.6       | 14.0     | 44.0           | 26.4              |
| SC3-77   | 2.1           | 0.15 | 300         | 4.7       | 20.8     | 0                   | 0         | 0         | 0        | 1250                 | 2.7       | 2.7       | 7.7      | 0                | 0         | 0         | 0        | 3600             | 2.7       | 4.4       | 13.6     | 42.1           | 25.3              |
| SC3-78   | 2.1           | 0.15 | 300         | 3.3       | 23.7     | 0                   | 0         | 0         | 0        | 1560                 | 3.2       | 3.3       | 7.9      | 0                | 0         | 0         | 0        | 1850             | 3.2       | 4.5       | 6.9      | 38.5           | 23.1              |
| SC3-79   | 2.1           | 0.15 | 300         | 4.0       | 22.1     | 0                   | 0         | 0         | 0        | 1740                 | 1.8       | 3.5       | 8.3      | 0                | 0         | 0         | 0        | 1100             | 1.8       | 3.0       | 6.1      | 36.5           | 21.9              |
| SC3-80   | 2.1           | 0.15 | 300         | 5.0       | 20.2     | 0                   | 0         | 0         | 0        | 1625                 | 2.8       | 3.4       | 8.0      | 0                | 0         | 0         | 0        | 2140             | 2.8       | 4.1       | 8.7      | 36.9           | 22.1              |
| SC3-81   | 2.1           | 0.15 | 300         | 6.7       | 18.0     | 0                   | 0         | 0         | 0        | 2000                 | 3.1       | 3.4       | 9.8      | 0                | 0         | 0         | 0        | 3600             | 3.1       | 4.9       | 12.2     | 40.0           | 24.0              |
| SC3-82   | 2.1           | 0.15 | 300         | 3.3       | 23.7     | 0                   | 0         | 0         | 0        | 2000                 | 3.2       | 3.3       | 10.1     | 0                | 0         | 0         | 0        | 625              | 3.2       | 4.1       | 2.5      | 36.4           | 21.8              |
| SC3-88   | 2.1           | 0.15 | 300         | 4.7       | 20.8     | 0                   | 0         | 0         | 0        | 825                  | 3.8       | 3.3       | 4.2      | 0                | 0         | 0         | 0        | 2400             | 3.8       | 3.9       | 10.3     | 35.2           | 21.1              |
| SC3-89   | 2.1           | 0.15 | 200         | 4.0       | 16.0     | 0                   | 0         | 0         | 0        | 910                  | 4.1       | 4.0       | 3.8      | 0                | 0         | 0         | 0        | 830              | 4.1       | 3.5       | 4.0      | 23.7           | 14.2              |

DCM TABLE 6-25 WAS USED FOR SHALLOW CONCENTRATED SWALE & GUTTER FLOW  
N VALUE FOR OVERLAND FLOW WAS ASSUMED TO BE 0.15 FOR ALL BASINS  
A ROUGHNESS COEFFICIENT OF 0.050 WAS USED FOR EARTHEN CHANNEL BOTTOMS  
A ROUGHNESS COEFFICIENT OF 0.013 WAS USED FOR CONCRETE LINED CONVEYANCES

**Sterling Ranch MDDP**  
**Hydrologic Study -Developed Conditions - Reach Data**  
**8/21/2018**

| Reach ID | Reach Length L1 (ft) | Reach Vert. Drop H1 (ft) | Reach Slope S1 % | Mannings N Value n | Reach Side Slope SS (H/V) | Bottom Width BW (ft) | Diameter D ft |
|----------|----------------------|--------------------------|------------------|--------------------|---------------------------|----------------------|---------------|
| RT-1     | 3975                 | 100                      | 2.5%             | 0.05               | 10                        | 6                    | N/A           |
| RT-2     | 4570                 | 120                      | 2.6%             | 0.05               | 10                        | 6                    | N/A           |
| RT-3     | 2360                 | 65                       | 2.8%             | 0.05               | 10                        | 6                    | N/A           |
| RT-4     | 2695                 | 65                       | 2.4%             | 0.05               | 10                        | 6                    | N/A           |
| RT-5     | 4100                 | 92                       | 2.2%             | 0.05               | 6                         | 10                   | N/A           |
| RT-6A    | 3030                 | 100                      | 3.3%             | 0.05               | 10                        | 6                    | N/A           |
| RT-6B    | 6145                 | 122                      | 2.0%             | 0.05               | 10                        | 6                    | N/A           |
| RT-7A    | 1050                 | 35                       | 3.3%             | 0.013              |                           |                      | 4             |
| RT-8     | 625                  | 24                       | 3.8%             | 0.013              |                           |                      | 2             |
| RT-9A    | 2600                 | 40                       | 1.5%             | 0.05               | 6                         | 30                   | N/A           |
| RT-9B    | 760                  | 17                       | 2.2%             | 0.05               | 6                         | 30                   | N/A           |
| RT-9C    | 1450                 | 26                       | 1.8%             | 0.05               | 6                         | 30                   | N/A           |
| RT-9D    | 1490                 | 28                       | 1.9%             | 0.05               | 6                         | 30                   | N/A           |
| RT-10A   | 1940                 | 42                       | 2.2%             | 0.013              |                           |                      | 5             |
| RT-10B   | 1560                 | 42                       | 2.7%             | 0.013              |                           |                      | 5             |
| RT-11A   | 1275                 | 26                       | 2.0%             | 0.05               | 6                         | 30                   | N/A           |
| RT-11B   | 2960                 | 46                       | 1.6%             | 0.05               | 6                         | 30                   | N/A           |
| RT-12A   | 2590                 | 40                       | 1.5%             | 0.05               | 6                         | 40                   |               |
| RT-12B   | 4200                 | 66                       | 1.6%             | 0.035              | 4                         | 15                   |               |
| RT-13    | 1550                 | 20                       | 1.3%             | 0.05               | 6                         | 40                   | N/A           |
| RT-14    | 1765                 | 35                       | 2.0%             | 0.05               | 6                         | 40                   | N/A           |
| RT-15A   | 900                  | 24                       | 2.7%             | 0.013              |                           |                      | 4             |
| RT-15B   | 1450                 | 30                       | 2.1%             | 0.013              |                           |                      | 6             |
| RT-16    | 1250                 | 24                       | 1.9%             | 0.013              |                           |                      | 3.5           |
| RT-17A   | 5000                 | 108                      | 2.2%             | 0.04               | 4                         | 4                    | N/A           |
| RT-17B   | 3675                 | 76                       | 2.1%             | 0.013              |                           |                      | 4             |
| RT-18    | 2500                 | 41                       | 1.6%             | 0.05               | 6                         | 40                   | N/A           |
| RT-19    | 1200                 | 6                        | 0.5%             | 0.013              |                           |                      | 6             |
| RT-20    | 1480                 | 22                       | 1.5%             | 0.05               | 6                         | 40                   | N/A           |
| RT-21    | 3300                 | 75                       | 2.3%             | 0.013              |                           |                      | 3.5           |
| RT-22    | 2000                 | 38                       | 1.9%             | 0.013              |                           |                      | 3             |

**Sterling Ranch MDDP - East Fork Basin**  
**Hydrologic Study - Developed Condition Composite CN & Impervious % Table**

| Basin  | Basin   | Basin | Basin   | Sub-Area 1 |     | HSG  | UA CN   | CN      | Sub-Area 2 |     | HSG  | UA CN   | CN      | Sub-Area 3 |     | HSG  | UA CN   | CN      | Sub-Area 4 |     | HSG  | UA CN   | CN      | Sub-Area 5 |     | HSG  | UA CN   | CN      | Sub-Area 6 |     | HSG  | UA CN   | CN      | Sub-Area 7 |     | HSG  | UA CN   | CN      | Sub-Area 8 |     | HSG  | UA CN   | CN      | Sub-Area 9 |     | HSG  | UA CN | CN    | Sub-Areas |     | % HSG | % HSG         | Weighted    | Weighted |     |     |    |    |
|--------|---------|-------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|---------|---------|------------|-----|------|-------|-------|-----------|-----|-------|---------------|-------------|----------|-----|-----|----|----|
| ID     | Area    | Area  | Area    | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value   | Value   | Area       | Imp | Type | Value | Value | Total     | A   | B     | Sub Areas Imp | Sub Area CN |          |     |     |    |    |
|        | (SF)    | (AC)  | (SQ MI) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (AC)       | (%) |      | (HSG B) | (HSG B) | (Check)    | %   | %    | %     | No.   |           |     |       |               |             |          |     |     |    |    |
| SCE-1  | 2805264 | 64.4  | 0.101   | 21.2       | 10  | B    | 63      | 63      | 22.2       | 12  | B    | 65      | 65      | 21.1       | 20  | B    | 68      | 68      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       | 64    | 0         | 100 | 14    | 65            |             |          |     |     |    |    |
| SCE-2  | 655113  | 15.0  | 0.023   | 15.0       | 10  | B    | 64      | 64      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       | 15        | 0   | 100   | 10            | 64          |          |     |     |    |    |
| SCE-3  | 2939174 | 67.5  | 0.105   | 60.2       | 25  | B    | 70      | 70      | 7.3        | 25  | A    | 54      | 70      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       | 68        | 11  | 89    | 25            | 70          |          |     |     |    |    |
| SCE-4  | 1287039 | 29.5  | 0.046   | 29.5       | 25  | B    | 70      | 70      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           | 30  | 0     | 100           | 25          | 70       |     |     |    |    |
| SCE-5  | 3726038 | 85.5  | 0.134   | 85.1       | 70  | A    | 87      | 87      | 0.4        | 70  | B    | 79      | 87      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           |     | 86    | 99            | 1           | 70       | 87  |     |    |    |
| SCE-6  | 166759  | 3.8   | 0.006   | 3.8        | 10  | A    | 43      | 64      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           | 4   | 100   | 0             | 10          | 64       |     |     |    |    |
| SCE-7  | 1955020 | 44.9  | 0.070   | 18.84      | 70  | A    | 79      | 87      | 26.04      | 80  | B    | 86      | 90      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           | 45  | 42    | 58            | 76          | 89       |     |     |    |    |
| SCE-8  | 1108602 | 25.5  | 0.040   | 25.5       | 95  | A    | 89      | 92      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           |     | 26    | 100           | 0           | 95       | 92  |     |    |    |
| SCE-9  | 175063  | 4.0   | 0.006   | 4.0        | 10  | A    | 43      | 64      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           | 4   | 100   | 0             | 10          | 64       |     |     |    |    |
| SCE-10 | 7591841 | 174.3 | 0.272   | 174.3      | 45  | A    | 65      | 83      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           |     | 174   | 100           | 0           | 45       | 83  |     |    |    |
| SCE-11 | 253349  | 5.8   | 0.009   | 5.8        | 10  | A    | 43      | 64      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           |     | 6     | 100           | 0           | 10       | 64  |     |    |    |
| SCE-13 | 3423352 | 78.6  | 0.123   | 78.6       | 10  | B    | 63      | 63      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           |     |       |               | 79          | 0        | 100 | 10  | 63 |    |
| SCE-14 | 2286292 | 52.5  | 0.082   | 52.5       | 10  | B    | 63      | 63      |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |         |         |            |     |      |       |       |           |     |       |               |             | 53       | 0   | 100 | 10 | 63 |

**Sterling Ranch MDDP - East Fork Basin**  
**Hydrologic Study - Developed Condition - Lag Time Calculations**

| Basin ID | OVERLAND FLOW |      |                |              |             | SHALLOW GUTTER FLOW |              |              |             | SHALLOW CHANNEL FLOW |              |              |             | STORM SEWER FLOW |              |              |             | CHANNELIZED FLOW |              |              |             | Tc<br>Total<br>(min) | TLag<br>0.6*Tc<br>(min) |
|----------|---------------|------|----------------|--------------|-------------|---------------------|--------------|--------------|-------------|----------------------|--------------|--------------|-------------|------------------|--------------|--------------|-------------|------------------|--------------|--------------|-------------|----------------------|-------------------------|
|          | P2<br>(in)    | n    | Length<br>(ft) | Slope<br>(%) | Tt<br>(min) | Length<br>(ft)      | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) | Length<br>(ft)       | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) | Length<br>(ft)   | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) | Length<br>(ft)   | Slope<br>(%) | Vel<br>(fps) | Tt<br>(min) |                      |                         |
| SCE-1    | 2.1           | 0.15 | 100            | 3.9          | 9.3         | 500                 | 2.8          | 0.5          | 1.5         | 0                    | 0            | 0.0          | 0.0         | 1500             | 1.2          | 8            | 3.1         | 0                | 0.0          | 0.0          | 0.0         | 13.9                 | 8.3                     |
| SCE-2    | 2.1           | 0.15 | 100            | 2.0          | 12.1        | 50                  | 3.0          | 2.0          | 2.9         | 0                    | 0            | 0.0          | 0.0         | 1800             | 1.4          | 8            | 3.8         | 0                | 0.0          | 0.0          | 0.0         | 18.7                 | 11.2                    |
| SCE-3    | 2.1           | 0.15 | 100            | 2.0          | 12.1        | 350                 | 2.0          | 2.0          | 2.8         | 0                    | 0            | 0.0          | 0.0         | 2000             | 1.4          | 8            | 4.2         | 0                | 0.0          | 0.0          | 0.0         | 19.1                 | 11.4                    |
| SCE-4    | 2.1           | 0.15 | 75             | 2.0          | 9.6         | 25                  | 3.3          | 1.9          | 2.8         | 0                    | 0            | 0.0          | 0.0         | 3350             | 0.6          | 8            | 7.0         | 0                | 0.0          | 0.0          | 0.0         | 19.4                 | 11.6                    |
| SCE-5    | 2.1           | 0.15 | 150            | 3.0          | 14.2        | 830                 | 2.7          | 2.7          | 2.8         | 0                    | 0            | 0.0          | 0.0         | 556              | 1.2          | 7            | 1.3         | 0                | 0.0          | 0.0          | 0.0         | 18.3                 | 11.0                    |
| SCE-6    | 2.1           | 0.15 | 25             | 2.0          | 4.0         | 25                  | 3.1          | 3.0          | 2.8         | 0                    | 0            | 0.0          | 0.0         | 123              | 1.5          | 8            | 0.3         | 0                | 0.0          | 0.0          | 0.0         | 7.0                  | 4.2                     |
| SCE-7    | 2.1           | 0.15 | 100            | 2.0          | 12.1        | 400                 | 2.9          | 2.1          | 2.8         | 0                    | 0            | 0.0          | 0.0         | 754              | 1.8          | 7            | 1.8         | 0                | 0.0          | 0.0          | 0.0         | 16.7                 | 10.0                    |
| SCE-8    | 2.1           | 0.15 | 100            | 2.0          | 12.1        | 300                 | 2.8          | 3.4          | 2.8         | 0                    | 0            | 0.0          | 0.0         | 650              | 1.5          | 7            | 1.5         | 0                | 0.0          | 0.0          | 0.0         | 16.4                 | 9.9                     |
| SCE-9    | 2.1           | 0.15 | 35             | 2.0          | 5.2         | 25                  | 3.5          | 3.6          | 3.7         | 0                    | 0            | 0.0          | 0.0         | 100              | 2.0          | 8            | 0.2         | 0                | 0.0          | 0.0          | 0.0         | 9.1                  | 5.5                     |
| SCE-10   | 2.1           | 0.15 | 150            | 2.0          | 16.7        | 900                 | 2.5          | 2.2          | 2.9         | 0                    | 0            | 0.0          | 0.0         | 2700             | 1.6          | 8            | 5.6         | 0                | 0.0          | 0.0          | 0.0         | 25.3                 | 15.2                    |
| SCE-11   | 2.1           | 0.15 | 25             | 2.0          | 4.0         | 25                  | 3            | 3.0          | 3.5         | 0                    | 0            | 0.0          | 0.0         | 400              | 3.0          | 7            | 1.0         | 0                | 0.0          | 0.0          | 0.0         | 8.4                  | 5.1                     |
| SCE-13   | 2.1           | 0.15 | 160            | 2.0          | 17.6        | 500                 | 2.5          | 2.5          | 3.1         | 0                    | 0            | 0.0          | 0.0         | 500              | 2.4          | 6            | 1.4         | 0                | 0.0          | 0.0          | 0.0         | 22.1                 | 13.3                    |
| SCE-14   | 2.1           | 0.15 | 160            | 2.0          | 17.6        | 450                 | 2.5          | 2.2          | 2.9         | 0                    | 0            | 0.0          | 0.0         | 500              | 2.0          | 8            | 1.0         | 0                | 0.0          | 0.0          | 0.0         | 21.6                 | 12.9                    |

DCM TABLE 6-25 WAS USED FOR SHALLOW CONCENTRATED SWALE & GUTTER FLOW  
N VALUE FOR OVERLAND FLOW WAS ASSUMED TO BE 0.15 FOR ALL BASINS  
A ROUGHNESS COEFFICIENT OF 0.050 WAS USED FOR EARTHEN CHANNEL BOTTOMS  
A ROUGHNESS COEFFICIENT OF 0.013 WAS USED FOR CONCRETE LINED CONVEYANCES

# HY-8 Culvert Analysis Report

## Crossing Discharge Data

Discharge Selection Method: Specify Minimum, Design, and Maximum Flow

Minimum Flow: 0 cfs

Design Flow: 1550 cfs

Maximum Flow: 2600 cfs


**Table 1 - Summary of Culvert Flows at Crossing: SRR (separate berm)**

| Headwater Elevation (ft) | Total Discharge (cfs) | Culvert 1 Discharge (cfs) | Culvert 2 (low flow) Discharge (cfs) | Roadway Discharge (cfs) | Iterations  |
|--------------------------|-----------------------|---------------------------|--------------------------------------|-------------------------|-------------|
| 7000.88                  | 0.00                  | 0.00                      | 0.00                                 | 0.00                    | 0           |
| 7003.13                  | 260.00                | 151.32                    | 108.64                               | 0.00                    | 3           |
| 7004.37                  | 520.00                | 339.63                    | 180.32                               | 0.00                    | 4           |
| 7005.52                  | 780.00                | 552.62                    | 227.38                               | 0.00                    | 4           |
| 7006.71                  | 1040.00               | 773.45                    | 266.59                               | 0.00                    | 4           |
| 7008.18                  | 1300.00               | 994.87                    | 305.19                               | 0.00                    | 4           |
| 7009.91                  | 1550.00               | 1205.48                   | 344.57                               | 0.00                    | 4           |
| 7011.14                  | 1820.00               | 1333.23                   | 369.90                               | 115.89                  | 7           |
| 7011.40                  | 2080.00               | 1359.45                   | 375.23                               | 344.67                  | 5           |
| 7011.62                  | 2340.00               | 1380.22                   | 379.47                               | 580.03                  | 5           |
| 7011.81                  | 2600.00               | 1398.22                   | 383.17                               | 817.61                  | 4           |
| 7010.88                  | 1672.34               | 1307.58                   | 364.76                               | 0.00                    | Overtopping |

Rating Curve Plot for Crossing: SRR (separate berm)

### Total Rating Curve

Crossing: SRR (separate berm)

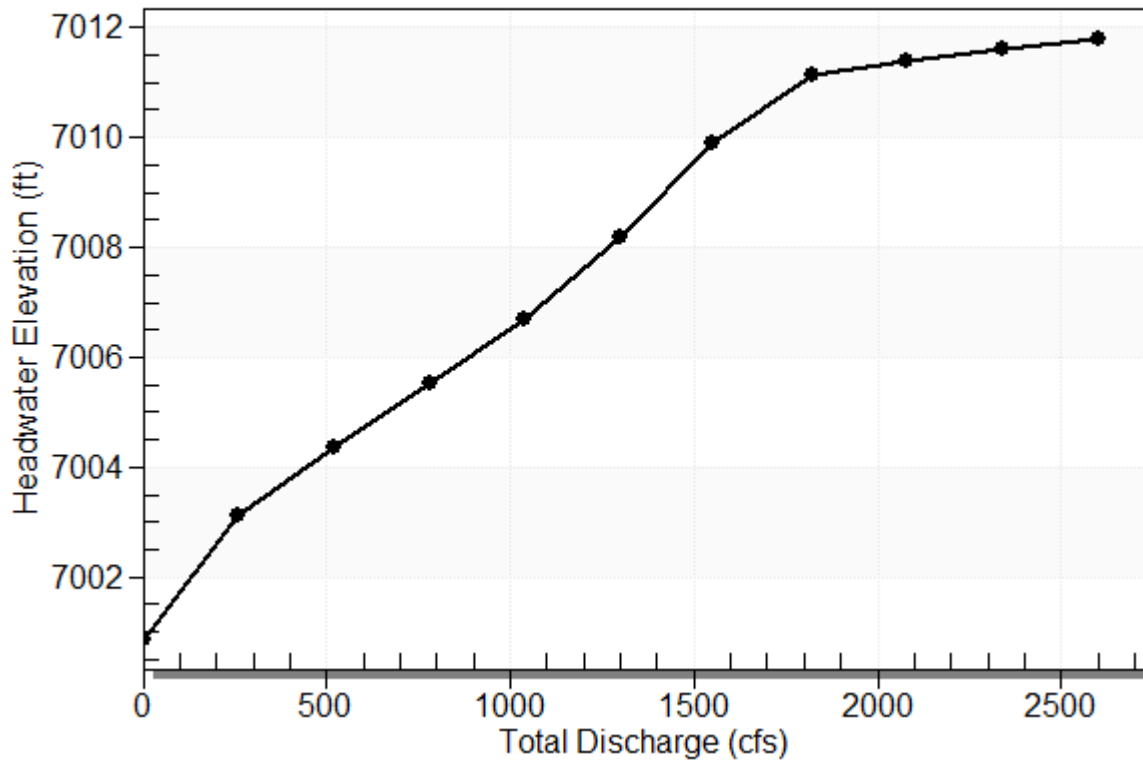

**Table 2 - Culvert Summary Table: Culvert 1**

| Total Discharge (cfs) | Culvert Discharge (cfs) | Headwater Elevation (ft) | Inlet Control Depth (ft) | Outlet Control Depth (ft) | Flow Type | Normal Depth (ft) | Critical Depth (ft) | Outlet Depth (ft) | Tailwater Depth (ft) | Outlet Velocity (ft/s) | Tailwater Velocity (ft/s) |
|-----------------------|-------------------------|--------------------------|--------------------------|---------------------------|-----------|-------------------|---------------------|-------------------|----------------------|------------------------|---------------------------|
| 0.00                  | 0.00                    | 7000.88                  | 0.000                    | 0.000                     | 0-NF      | 0.000             | 0.000               | 0.000             | 0.000                | 0.000                  | 0.000                     |
| 260.00                | 151.32                  | 7003.13                  | 1.745                    | 1.751                     | 3-M2t     | 1.225             | 1.017               | 1.177             | 1.738                | 4.944                  | 2.537                     |
| 520.00                | 339.63                  | 7004.37                  | 2.954                    | 2.998                     | 3-M2t     | 2.077             | 1.743               | 2.032             | 2.593                | 6.429                  | 3.216                     |
| 780.00                | 552.62                  | 7005.52                  | 4.097                    | 4.143                     | 3-M2t     | 2.886             | 2.412               | 2.703             | 3.264                | 7.863                  | 3.673                     |
| 1040.00               | 773.45                  | 7006.71                  | 5.326                    | 5.184                     | 3-M2t     | 3.644             | 3.018               | 3.274             | 3.835                | 9.085                  | 4.027                     |
| 1300.00               | 994.87                  | 7008.18                  | 6.800                    | 6.142                     | 7-M2t     | 4.000             | 3.569               | 3.780             | 4.341                | 10.124                 | 4.318                     |
| 1550.00               | 1205.48                 | 7009.91                  | 8.531                    | 4.111                     | 5-M2t     | 4.000             | 4.000               | 3.780             | 4.781                | 0.000                  | 4.558                     |
| 1820.00               | 1333.23                 | 7011.14                  | 9.756                    | 4.548                     | 5-M2t     | 4.000             | 4.000               | 3.780             | 5.218                | 10.124                 | 4.786                     |
| 2080.00               | 1359.45                 | 7011.40                  | 10.024                   | 4.939                     | 5-M2t     | 4.000             | 4.000               | 3.780             | 5.609                | 10.124                 | 4.982                     |
| 2340.00               | 1380.22                 | 7011.62                  | 10.241                   | 5.306                     | 5-M2t     | 4.000             | 4.000               | 3.780             | 5.976                | 10.124                 | 5.159                     |
| 2600.00               | 1398.22                 | 7011.81                  | 10.431                   | 5.652                     | 5-M2t     | 4.000             | 4.000               | 3.780             | 6.322                | 10.124                 | 5.322                     |



\*\*\*\*\*


Straight Culvert

Inlet Elevation (invert): 7001.38 ft, Outlet Elevation (invert): 7001.27 ft

Culvert Length: 84.00 ft, Culvert Slope: 0.0013

\*\*\*\*\*


### Culvert Performance Curve Plot: Culvert 1

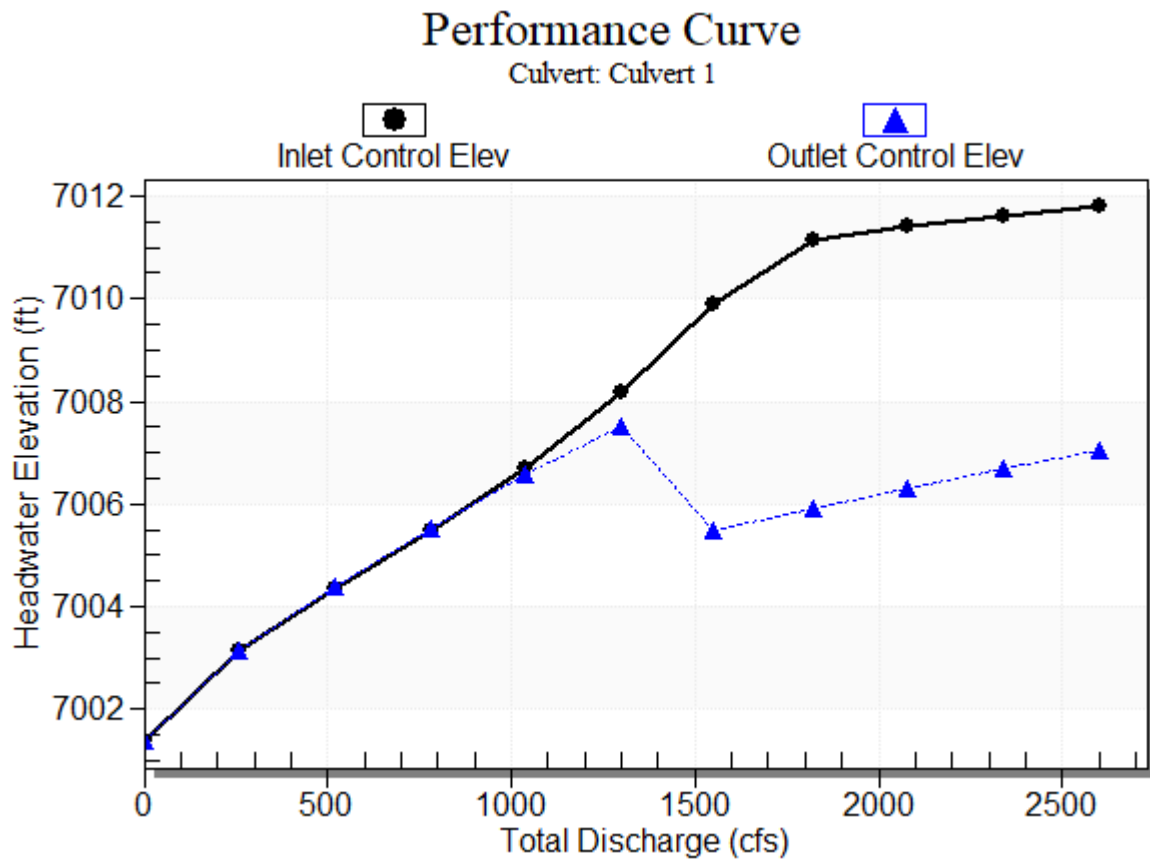

## Water Surface Profile Plot for Culvert: Culvert 1

Crossing - SRR (separate berm), Design Discharge - 1550.0 cfs

Culvert - Culvert 1, Culvert Discharge - 1205.5 cfs

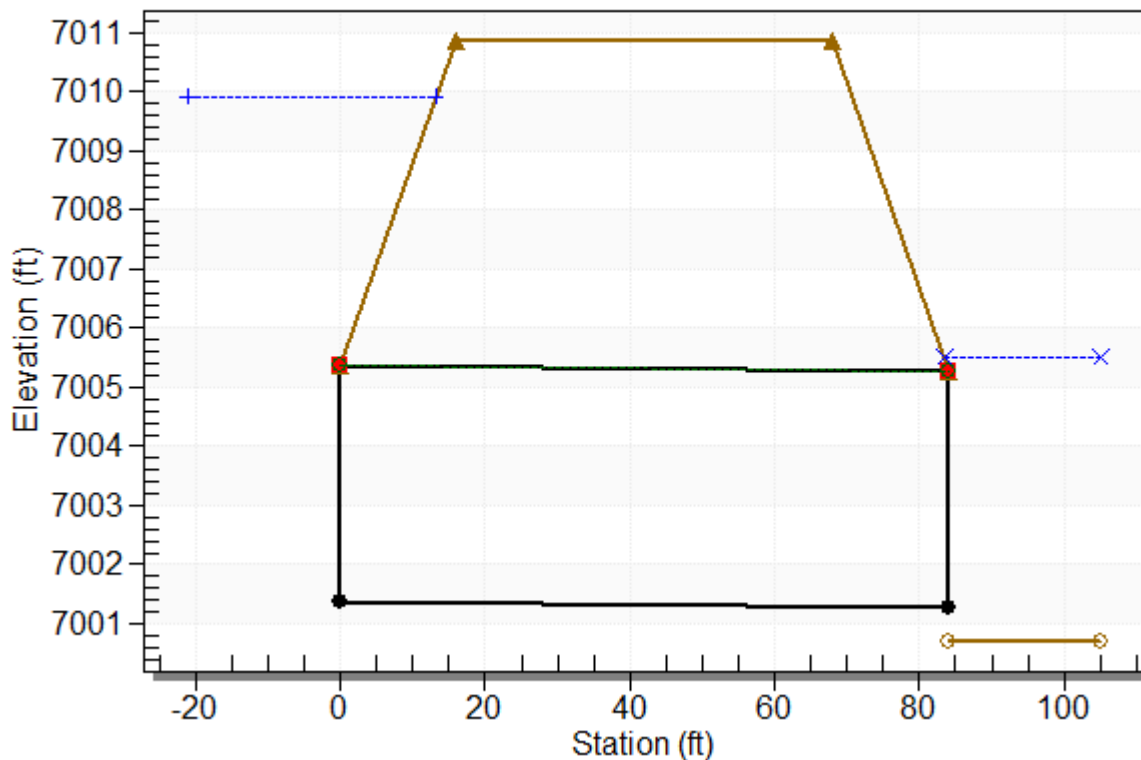

### Site Data - Culvert 1

Site Data Option: Culvert Invert Data

Inlet Station: 0.00 ft

Inlet Elevation: 7001.38 ft

Outlet Station: 84.00 ft

Outlet Elevation: 7001.27 ft

Number of Barrels: 2

### Culvert Data Summary - Culvert 1

Barrel Shape: Concrete Box

Barrel Span: 13.00 ft

Barrel Rise: 4.00 ft

Barrel Material: Concrete

Embedment: 0.00 in

Barrel Manning's n: 0.0120

Culvert Type: Straight

Inlet Configuration: Square Edge (90°) Headwall

Inlet Depression: None

**Table 3 - Culvert Summary Table: Culvert 2 (low flow)**

| Total Discharge (cfs) | Culvert Discharge (cfs) | Headwater Elevation (ft) | Inlet Control Depth (ft) | Outlet Control Depth (ft) | Flow Type | Normal Depth (ft) | Critical Depth (ft) | Outlet Depth (ft) | Tailwater Depth (ft) | Outlet Velocity (ft/s) | Tailwater Velocity (ft/s) |
|-----------------------|-------------------------|--------------------------|--------------------------|---------------------------|-----------|-------------------|---------------------|-------------------|----------------------|------------------------|---------------------------|
| 0.00                  | 0.00                    | 7000.88                  | 0.000                    | 0.000                     | 0-NF      | 0.000             | 0.000               | 0.000             | 0.000                | 0.000                  | 0.000                     |
| 260.00                | 108.64                  | 7003.13                  | 2.213                    | 2.235                     | 7-M1t     | 1.340             | 1.294               | 1.738             | 1.738                | 4.808                  | 2.537                     |
| 520.00                | 180.32                  | 7004.37                  | 3.494                    | 3.860                     | 4-FFf     | 1.865             | 1.815               | 2.000             | 2.593                | 6.935                  | 3.216                     |
| 780.00                | 227.38                  | 7005.52                  | 4.644                    | 5.380                     | 4-FFf     | 2.000             | 2.000               | 2.000             | 3.264                | 8.745                  | 3.673                     |
| 1040.00               | 266.59                  | 7006.71                  | 5.825                    | 6.807                     | 4-FFf     | 2.000             | 2.000               | 2.000             | 3.835                | 10.253                 | 4.027                     |
| 1300.00               | 305.19                  | 7008.18                  | 7.300                    | 8.288                     | 4-FFf     | 2.000             | 2.000               | 2.000             | 4.341                | 11.738                 | 4.318                     |
| 1550.00               | 344.57                  | 7009.91                  | 9.031                    | 9.860                     | 4-FFf     | 2.000             | 2.000               | 2.000             | 4.781                | 13.253                 | 4.558                     |
| 1820.00               | 369.90                  | 7011.14                  | 10.255                   | 11.097                    | 4-FFf     | 2.000             | 2.000               | 2.000             | 5.218                | 14.227                 | 4.786                     |
| 2080.00               | 375.23                  | 7011.40                  | 10.524                   | 11.663                    | 4-FFf     | 2.000             | 2.000               | 2.000             | 5.609                | 14.432                 | 4.982                     |
| 2340.00               | 379.47                  | 7011.62                  | 10.740                   | 12.172                    | 4-FFf     | 2.000             | 2.000               | 2.000             | 5.976                | 14.595                 | 5.159                     |
| 2600.00               | 383.17                  | 7011.81                  | 10.931                   | 12.642                    | 4-FFf     | 2.000             | 2.000               | 2.000             | 6.322                | 14.737                 | 5.322                     |

\*\*\*\*\*

Straight Culvert

Inlet Elevation (invert): 7000.88 ft, Outlet Elevation (invert): 7000.71 ft


Culvert Length: 84.00 ft, Culvert Slope: 0.0020

\*\*\*\*\*

### Culvert Performance Curve Plot: Culvert 2 (low flow)

## Performance Curve


Culvert: Culvert 2 (low flow)

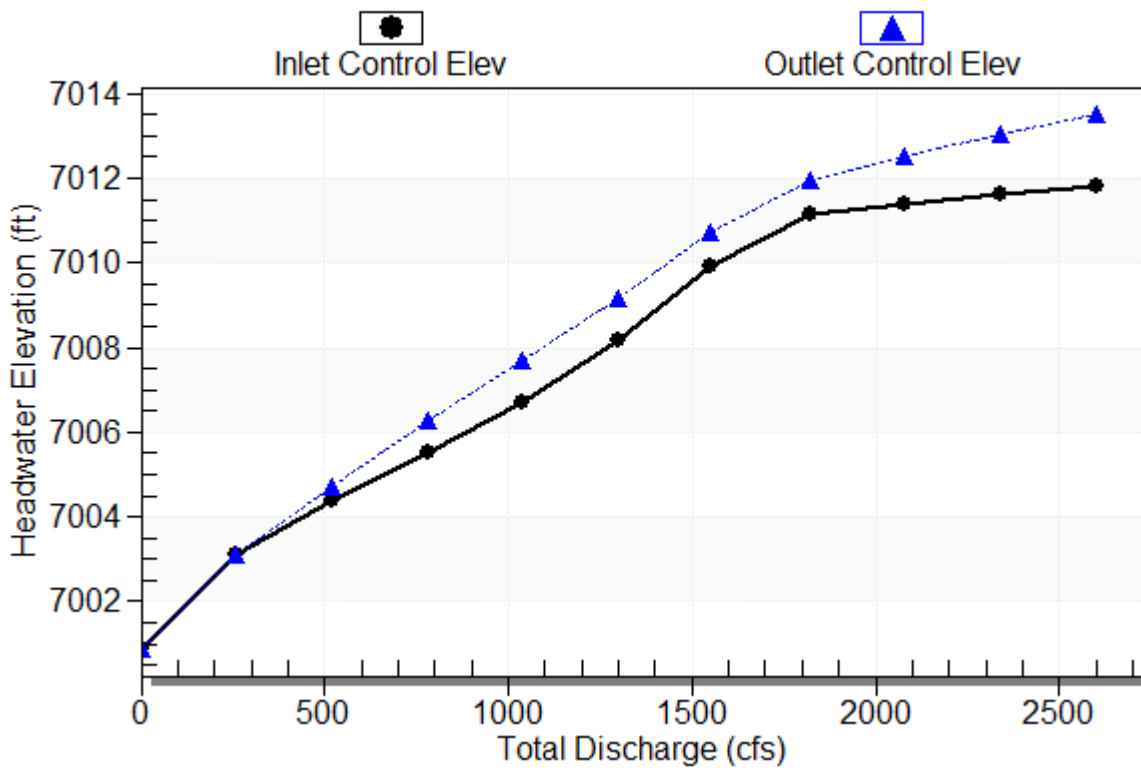

## Water Surface Profile Plot for Culvert: Culvert 2 (low flow)

Crossing - SRR (separate berm), Design Discharge - 1550.0 cfs

Culvert - Culvert 2 (low flow), Culvert Discharge - 344.6 cfs

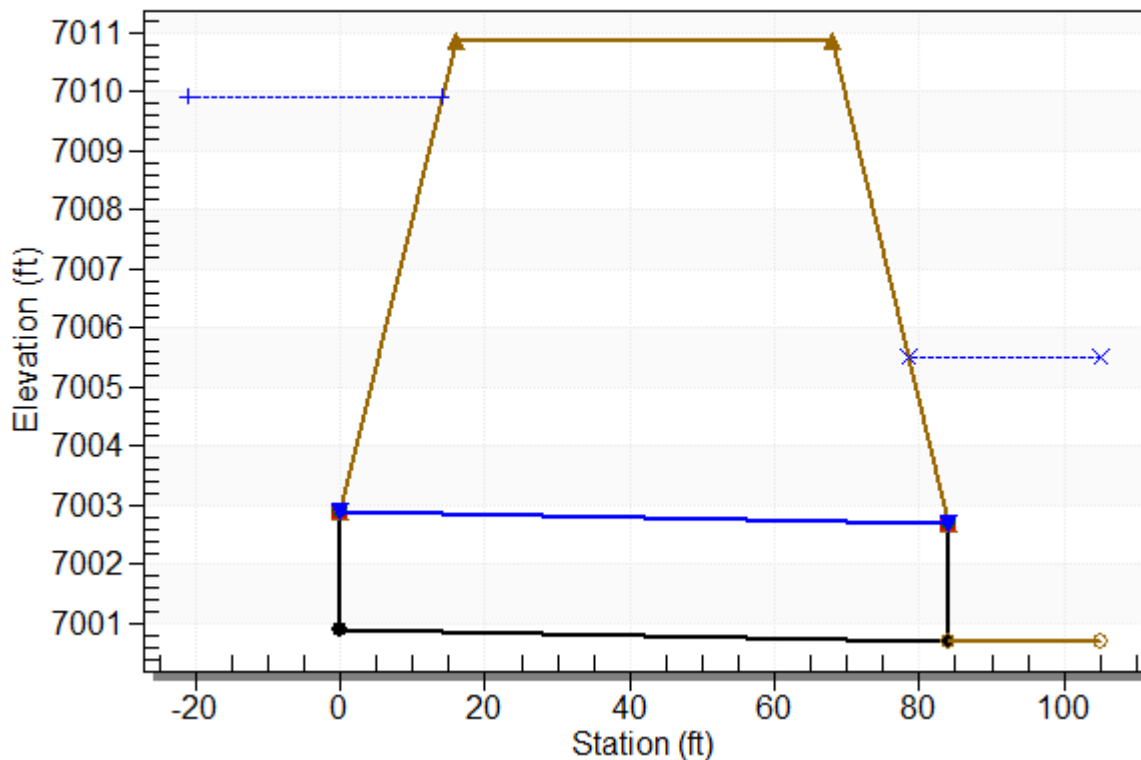

### Site Data - Culvert 2 (low flow)

Site Data Option: Culvert Invert Data

Inlet Station: 0.00 ft

Inlet Elevation: 7000.88 ft

Outlet Station: 84.00 ft

Outlet Elevation: 7000.71 ft

Number of Barrels: 1

### Culvert Data Summary - Culvert 2 (low flow)

Barrel Shape: Concrete Box

Barrel Span: 13.00 ft

Barrel Rise: 2.00 ft

Barrel Material: Concrete

Embedment: 0.00 in

Barrel Manning's n: 0.0120

Culvert Type: Straight

Inlet Configuration: Square Edge (90°) Headwall

Inlet Depression: None

**Table 4 - Downstream Channel Rating Curve (Crossing: SRR (separate berm))**

| Flow (cfs) | Water Surface Elev (ft) | Depth (ft) | Velocity (ft/s) | Shear (psf) | Froude Number |
|------------|-------------------------|------------|-----------------|-------------|---------------|
| 0.00       | 7000.71                 | 0.00       | 0.00            | 0.00        | 0.00          |
| 260.00     | 7002.45                 | 1.74       | 2.54            | 0.22        | 0.36          |
| 520.00     | 7003.30                 | 2.59       | 3.22            | 0.32        | 0.38          |
| 780.00     | 7003.97                 | 3.26       | 3.67            | 0.41        | 0.39          |
| 1040.00    | 7004.55                 | 3.84       | 4.03            | 0.48        | 0.40          |
| 1300.00    | 7005.05                 | 4.34       | 4.32            | 0.54        | 0.41          |
| 1550.00    | 7005.49                 | 4.78       | 4.56            | 0.60        | 0.41          |
| 1820.00    | 7005.93                 | 5.22       | 4.79            | 0.65        | 0.42          |
| 2080.00    | 7006.32                 | 5.61       | 4.98            | 0.70        | 0.42          |
| 2340.00    | 7006.69                 | 5.98       | 5.16            | 0.75        | 0.43          |
| 2600.00    | 7007.03                 | 6.32       | 5.32            | 0.79        | 0.43          |



**Tailwater Channel Data - SRR (separate berm)**

Tailwater Channel Option: Trapezoidal Channel

Bottom Width: 52.00 ft

Side Slope (H:V): 4.00 (4:1)

Channel Slope: 0.0020

Channel Manning's n: 0.0350

Channel Invert Elevation: 7000.71 ft

**Roadway Data for Crossing: SRR (separate berm)**

Roadway Profile Shape: Constant Roadway Elevation

Crest Length: 300.00 ft

Crest Elevation: 7010.88 ft

Roadway Surface: Paved

Roadway Top Width: 52.00 ft

**Sterling Ranch - East Fork Basin**  
**Hydrologic Study - Developed Conditions - Reach Data**

| Reach ID | Reach Length<br>L1<br>(ft) | Reach Vert. Drop<br>H1<br>(ft) | Reach Slope<br>S1<br>% | Mannings N Value<br>n | Reach Side Slope<br>SS<br>(H/V) | Bottom Width<br>BW<br>(ft) | Diameter<br>D<br>ft |
|----------|----------------------------|--------------------------------|------------------------|-----------------------|---------------------------------|----------------------------|---------------------|
| RT-1E    | 300                        | 6                              | 2.0%                   | 0.013                 | N/A                             | N/A                        | 4                   |
| RT-2E    | 2000                       | 40                             | 2.0%                   | 0.013                 | N/A                             | N/A                        | 4                   |
| RT-3E    | 400                        | 10                             | 2.5%                   | 0.013                 | N/A                             | N/A                        | 4                   |
| RT-4E    | 3600                       | 90                             | 2.5%                   | 0.013                 | N/A                             | N/A                        | 4                   |
| RT-5E    | 1250                       | 31                             | 2.5%                   | 0.013                 | N/A                             | N/A                        | 5                   |
| RT-6E    | 1485                       | 37                             | 2.5%                   | 0.013                 | N/A                             | N/A                        | 4                   |
| RT-7E    | 1410                       | 35                             | 2.5%                   | 0.013                 | N/A                             | N/A                        | 6                   |

### Existing Stock Pond 1 Proposed Outlet Structure

|           |           |          |     |                 |          |      |
|-----------|-----------|----------|-----|-----------------|----------|------|
| width     | 25        | area     | 625 | open area x 70% | 218.75   | 0.25 |
| length    | 25        | blockage | 0.5 |                 |          |      |
| perimeter | 100       | blockage | 0   | avail perm.     | 100      |      |
| Elev (ft) | Head (ft) |          |     | Orifice         | Weir     |      |
| 7036      | 0         |          |     | 0               | 0        |      |
| 7036.25   | 0.25      |          |     | 526.6381        | 38.75    |      |
| 7036.5    | 0.5       |          |     | 744.7787        | 109.6016 |      |
| 7036.75   | 0.75      |          |     | 912.1639        | 201.3509 |      |
| 7037      | 1         |          |     | 1053.276        | 310      |      |
| 7037.25   | 1.25      |          |     | 1177.599        | 433.2382 |      |
| 7037.5    | 1.5       |          |     | 1289.995        | 569.5064 |      |
| 7037.75   | 1.75      |          |     | 1393.353        | 717.66   |      |
| 7038      | 2         |          |     | 1489.557        | 876.8124 |      |
| 7038.25   | 2.25      |          |     | 1579.914        | 1046.25  |      |
| 7038.5    | 2.5       |          |     | 1665.376        | 1225.383 |      |
| 7038.75   | 2.75      |          |     | 1746.661        | 1413.711 |      |
| 7039      | 3         |          |     | 1824.328        | 1610.807 |      |
| 7039.25   | 3.25      |          |     | 1898.821        | 1816.296 |      |
| 7039.5    | 3.5       |          |     | 1970.499        | 2029.849 |      |
| 7039.75   | 3.75      |          |     | 2039.66         | 2251.172 |      |
| 7040      | 4         |          |     | 2106.552        | 2480     |      |
| 7040.25   | 4.25      |          |     | 2171.384        | 2716.096 |      |
| 7040.5    | 4.5       |          |     | 2234.336        | 2959.242 |      |
| 7040.75   | 4.75      |          |     | 2295.562        | 3209.239 |      |
| 7041      | 5         |          |     | 2355.197        | 3465.905 |      |
| 7041.25   | 5.25      |          |     | 2413.359        | 3729.071 |      |
| 7041.5    | 5.5       |          |     | 2470.152        | 3998.579 |      |
| 7041.75   | 5.75      |          |     | 2525.667        | 4274.285 |      |
| 7042      | 6         |          |     | 2579.989        | 4556.051 |      |
| 7042.25   | 6.25      |          |     | 2633.19         | 4843.75  |      |
| 7042.5    | 6.5       |          |     | 2685.338        | 5137.262 |      |
| 7042.75   | 6.75      |          |     | 2736.492        | 5436.474 |      |
| 7043      | 7         |          |     | 2786.707        | 5741.28  |      |
| 7043.25   | 7.25      |          |     | 2836.033        | 6051.579 |      |
| 7043.5    | 7.5       |          |     | 2884.516        | 6367.275 |      |
| 7043.75   | 7.75      |          |     | 2932.197        | 6688.277 |      |
| 7044      | 8         |          |     | 2979.115        | 7014.499 |      |
| 7044.25   | 8.25      |          |     | 3025.305        | 7345.859 |      |
| 7044.5    | 8.5       |          |     | 3070.801        | 7682.279 |      |
| 7044.75   | 8.75      |          |     | 3115.633        | 8023.683 |      |
| 7045      | 9         |          |     | 3159.828        | 8370     |      |
| 7045.25   | 9.25      |          |     | 3203.414        | 8721.161 |      |
| 7045.5    | 9.5       |          |     | 3246.415        | 9077.1   |      |
| 7045.75   | 9.75      |          |     | 3288.854        | 9437.753 |      |
| 7046      | 10        |          |     | 3330.752        | 9803.061 |      |
| 7046.25   | 10.25     |          |     | 3372.129        | 10172.96 |      |
| 7046.5    | 10.5      |          |     | 3413.005        | 10547.41 |      |
| 7046.75   | 10.75     |          |     | 3453.397        | 10926.33 |      |
| 7047      | 11        |          |     | 3493.322        | 11309.69 |      |
| 7047.25   | 11.25     |          |     | 3532.796        | 11697.43 |      |
| 7047.5    | 11.5      |          |     | 3571.833        | 12089.5  |      |
| 7047.75   | 11.75     |          |     | 3610.449        | 12485.86 |      |
| 7048      | 12        |          |     | 3648.656        | 12886.46 |      |

### Existing Stock Pond 2 Proposed Outlet Structure

| width     | 25        | area     | 625 | open area x 70% | 218.75   |
|-----------|-----------|----------|-----|-----------------|----------|
| length    | 25        | blockage | 0.5 |                 |          |
| perimeter | 100       | blockage | 0   | avail perm.     | 100      |
| Elev (ft) | Head (ft) |          |     | Orifice         | Weir     |
| 7117.75   | 0         |          |     | 0               | 0        |
| 7118      | 0.25      |          |     | 526.6381        | 38.75    |
| 7118.25   | 0.5       |          |     | 744.7787        | 109.6016 |
| 7118.5    | 0.75      |          |     | 912.1639        | 201.3509 |
| 7118.75   | 1         |          |     | 1053.276        | 310      |
| 7119      | 1.25      |          |     | 1177.599        | 433.2382 |
| 7119.25   | 1.5       |          |     | 1289.995        | 569.5064 |
| 7119.5    | 1.75      |          |     | 1393.353        | 717.66   |
| 7119.75   | 2         |          |     | 1489.557        | 876.8124 |
| 7120      | 2.25      |          |     | 1579.914        | 1046.25  |
| 7120.25   | 2.5       |          |     | 1665.376        | 1225.383 |
| 7120.5    | 2.75      |          |     | 1746.661        | 1413.711 |
| 7120.75   | 3         |          |     | 1824.328        | 1610.807 |
| 7121      | 3.25      |          |     | 1898.821        | 1816.296 |
| 7121.25   | 3.5       |          |     | 1970.499        | 2029.849 |
| 7121.5    | 3.75      |          |     | 2039.66         | 2251.172 |
| 7121.75   | 4         |          |     | 2106.552        | 2480     |
| 7122      | 4.25      |          |     | 2171.384        | 2716.096 |
| 7122.25   | 4.5       |          |     | 2234.336        | 2959.242 |
| 7122.5    | 4.75      |          |     | 2295.562        | 3209.239 |
| 7122.75   | 5         |          |     | 2355.197        | 3465.905 |
| 7123      | 5.25      |          |     | 2413.359        | 3729.071 |
| 7123.25   | 5.5       |          |     | 2470.152        | 3998.579 |
| 7123.5    | 5.75      |          |     | 2525.667        | 4274.285 |
| 7123.75   | 6         |          |     | 2579.989        | 4556.051 |
| 7124      | 6.25      |          |     | 2633.19         | 4843.75  |
| 7124.25   | 6.5       |          |     | 2685.338        | 5137.262 |
| 7124.5    | 6.75      |          |     | 2736.492        | 5436.474 |
| 7124.75   | 7         |          |     | 2786.707        | 5741.28  |
| 7125      | 7.25      |          |     | 2836.033        | 6051.579 |
| 7125.25   | 7.5       |          |     | 2884.516        | 6367.275 |
| 7125.5    | 7.75      |          |     | 2932.197        | 6688.277 |
| 7125.75   | 8         |          |     | 2979.115        | 7014.499 |
| 7126      | 8.25      |          |     | 3025.305        | 7345.859 |
| 7126.25   | 8.5       |          |     | 3070.801        | 7682.279 |
| 7126.5    | 8.75      |          |     | 3115.633        | 8023.683 |
| 7126.75   | 9         |          |     | 3159.828        | 8370     |
| 7127      | 9.25      |          |     | 3203.414        | 8721.161 |
| 7127.25   | 9.5       |          |     | 3246.415        | 9077.1   |
| 7127.5    | 9.75      |          |     | 3288.854        | 9437.753 |
| 7127.75   | 10        |          |     | 3330.752        | 9803.061 |
| 7128      | 10.25     |          |     | 3372.129        | 10172.96 |
| 7128.25   | 10.5      |          |     | 3413.005        | 10547.41 |
| 7128.5    | 10.75     |          |     | 3453.397        | 10926.33 |
| 7128.75   | 11        |          |     | 3493.322        | 11309.69 |
| 7129      | 11.25     |          |     | 3532.796        | 11697.43 |
| 7129.25   | 11.5      |          |     | 3571.833        | 12089.5  |
| 7129.5    | 11.75     |          |     | 3610.449        | 12485.86 |
| 7129.75   | 12        |          |     | 3648.656        | 12886.46 |

**Existing vs. Proposed Peak Flow Rate Design Point Summary**

| Design Point | Existing | Proposed | %     | Existing   | Proposed | %    | Existing | Proposed     | %    | Existing  | Proposed  | %    | Existing   | Proposed  | %    | Existing  | Proposed   | %    |
|--------------|----------|----------|-------|------------|----------|------|----------|--------------|------|-----------|-----------|------|------------|-----------|------|-----------|------------|------|
|              | Q2 (cfs) | Q2 (cfs) |       | Difference | Q5 (cfs) |      | Q5 (cfs) | % Difference |      | Q10 (cfs) | Q10 (cfs) |      | Difference | Q25 (cfs) |      | Q25 (cfs) | Difference |      |
| DP-73        | 171.20   | 147.29   | -14%  | 503.09     | 442.62   | -12% | 791.79   | 703.56       | -11% | 1033.04   | 919.74    | -11% | 1414.41    | 1257.44   | -11% | 1672.0    | 1497.12    | -10% |
| DP-71        | 175.00   | 154.76   | -12%  | 518.37     | 475.49   | -8%  | 818.24   | 773.89       | -5%  | 1068.91   | 1022.86   | -4%  | 1466.2     | 1389.51   | -5%  | 1734.9    | 1642.96    | -5%  |
| DP-69        | 189.69   | 158.17   | -17%  | 579.88     | 521.37   | -10% | 923.83   | 855.08       | -7%  | 1213.68   | 1134.95   | -6%  | 1675.53    | 1532.12   | -9%  | 1988.4    | 1795.11    | -10% |
| DP-63        | 175.18   | 136.83   | -22%  | 557.4      | 404.27   | -27% | 899.71   | 684.34       | -24% | 1192.36   | 940.16    | -21% | 1661.58    | 1293.98   | -22% | 1980.7    | 1554.72    | -22% |
| DP-60A       | 167.91   | 150.16   | -11%  | 546.35     | 456.15   | -17% | 886.79   | 769.88       | -13% | 1179      | 1056.06   | -10% | 1649.04    | 1471.37   | -11% | 1969.2    | 1839.17    | -7%  |
| DP-53A       | 182.68   | 150.2    | -18%  | 602.01     | 456.7    | -24% | 983.58   | 772.23       | -21% | 1311.23   | 1058.86   | -19% | 1837.86    | 1474.82   | -20% | 2197.7    | 1843.8     | -16% |
| DP-56        | 0.35     | 25.44    | 7169% | 40.19      | 46.04    | 15%  | 96.37    | 68.58        | -29% | 141.51    | 85.35     | -40% | 207.98     | 124.7     | -40% | 242.9     | 145.69     | -40% |
| DP-8         | 1.97     | 27.54    | 1298% | 50.28      | 49.4     | -2%  | 115.07   | 72.24        | -37% | 167.23    | 90.17     | -46% | 245.12     | 125.47    | -49% | 297.4     | 147.14     | -51% |

**Existing vs. Proposed Total Runoff Volume Design Point Summary**


| Design Point | Existing   | Proposed   | %      | Existing   | Proposed   | %     | Existing   | Proposed     | %    | Existing    | Proposed    | %    | Existing   | Proposed    | %    | Existing    | Proposed   | %    |
|--------------|------------|------------|--------|------------|------------|-------|------------|--------------|------|-------------|-------------|------|------------|-------------|------|-------------|------------|------|
|              | V2 (ac-ft) | V2 (ac-ft) |        | Difference | V5 (ac-ft) |       | V5 (ac-ft) | % Difference |      | V10 (ac-ft) | V10 (ac-ft) |      | Difference | V25 (ac-ft) |      | V25 (ac-ft) | Difference |      |
| DP-73        | 19.9       | 20.62      | 4%     | 51.9       | 52.17      | 1%    | 78.6       | 78.56        | 0%   | 101.0       | 100.66      | 0%   | 136.3      | 135.64      | 0%   | 159.9       | 158.97     | -1%  |
| DP-71        | 20.7       | 27.13      | 31%    | 54.6       | 63.22      | 16%   | 82.6       | 93.29        | 13%  | 106.2       | 118.46      | 12%  | 143.6      | 158.05      | 10%  | 168.5       | 184.75     | 10%  |
| DP-69        | 24.0       | 29.52      | 23%    | 64.4       | 71.50      | 11%   | 98.2       | 106.18       | 8%   | 126.4       | 134.42      | 6%   | 171.2      | 178.30      | 4%   | 201.0       | 207.46     | 3%   |
| DP-63        | 25.9       | 59.84      | 131%   | 69.7       | 126.74     | 82%   | 105.9      | 182.60       | 72%  | 136.3       | 228.02      | 67%  | 184.4      | 298.29      | 62%  | 216.4       | 343.71     | 59%  |
| DP-60A       | 26.1       | 87.77      | 236%   | 71.2       | 173.08     | 143%  | 108.6      | 244.90       | 125% | 139.6       | 302.90      | 117% | 189.0      | 392.82      | 108% | 221.9       | 451.12     | 103% |
| DP-53A       | 31.6       | 88.38      | 180%   | 84.1       | 174.00     | 107%  | 128.0      | 246.12       | 92%  | 164.5       | 304.74      | 85%  | 221.9      | 395.88      | 78%  | 260.5       | 454.19     | 74%  |
| DP-56        | 0.1        | 31.61      | 50890% | 4.0        | 46.65      | 1069% | 8.7        | 60.15        | 588% | 12.6        | 71.81       | 472% | 18.2       | 89.30       | 391% | 22.0        | 100.97     | 359% |
| DP-8         | 0.2        | 32.84      | 19179% | 4.9        | 48.49      | 894%  | 10.3       | 62.91        | 514% | 14.5        | 74.88       | 415% | 21.0       | 93.29       | 344% | 25.3        | 105.88     | 318% |

MDDP Proposed vs. Amendment Proposed Peak Flow Rate Basin Summary

| Basin   | MDDP                 |                      | Amend | %     | MDDP                  |                       | Amend | %      | MDDP                  |                        | Amend  | %    | MDDP  |        | Amend | %     | MDDP   |      | Amend | % |
|---------|----------------------|----------------------|-------|-------|-----------------------|-----------------------|-------|--------|-----------------------|------------------------|--------|------|-------|--------|-------|-------|--------|------|-------|---|
|         | Q <sub>2</sub> (cfs) | Q <sub>5</sub> (cfs) |       |       | Q <sub>10</sub> (cfs) | Q <sub>25</sub> (cfs) |       |        | Q <sub>50</sub> (cfs) | Q <sub>100</sub> (cfs) |        |      |       |        |       |       |        |      |       |   |
| SC3-1A  | 16.3                 | 15.4                 | -6%   | 23.3  | 32.05                 | 38%                   | 33    | 44.63  | 35%                   | 45.8                   | 54.22  | 18%  | 57.1  | 68.02  | 19%   | 68.9  | 77.21  | 12%  |       |   |
| SC3-5A  | 40.6                 | 48.38                | 19%   | 53.7  | 75.2                  | 40%                   | 71    | 95.88  | 35%                   | 92.4                   | 112.35 | 22%  | 110.6 | 135.5  | 23%   | 129.1 | 150.82 | 17%  |       |   |
| SC3-5B  | 53.8                 | 60.26                | 12%   | 73    | 97.13                 | 33%                   | 98.5  | 126.36 | 28%                   | 130.8                  | 149    | 14%  | 158.6 | 181.48 | 14%   | 187   | 203.13 | 9%   |       |   |
| SC3-6A  | 61.4                 | 59.98                | -2%   | 79.3  | 84.21                 | 6%                    | 102.2 | 106.32 | 4%                    | 130.1                  | 123.77 | -5%  | 153.6 | 149.06 | -3%   | 177.1 | 165.69 | -6%  |       |   |
| SC3-6B  | 32.9                 | 31.63                | -4%   | 43.4  | 49.78                 | 15%                   | 57    | 63.88  | 12%                   | 73.9                   | 74.85  | 1%   | 88.2  | 90.7   | 3%    | 102.7 | 101.25 | -1%  |       |   |
| SC3-6C  | 53.9                 | 52.26                | -3%   | 72.5  | 84.02                 | 16%                   | 97.1  | 115.61 | 19%                   | 128                    | 140.03 | 9%   | 154.5 | 174.32 | 13%   | 181.5 | 196.64 | 8%   |       |   |
| SC3-7   | 54                   | 60.94                | 13%   | 69.9  | 87.91                 | 26%                   | 90.3  | 109.28 | 21%                   | 115.2                  | 126.05 | 9%   | 136.2 | 150.45 | 10%   | 157.2 | 166.71 | 6%   |       |   |
| SC3-8   | 25.4                 | 12.18                | -52%  | 42.1  | 56.41                 | 34%                   | 66.7  | 93.96  | 41%                   | 100.7                  | 122.75 | 22%  | 132.3 | 166.13 | 26%   | 166.2 | 195.44 | 18%  |       |   |
| SC3-9   | 45.8                 | 24.66                | -46%  | 71.5  | 73.44                 | 3%                    | 108.6 | 114.01 | 5%                    | 158.9                  | 146.06 | -8%  | 204.9 | 193.77 | -5%   | 254   | 225.81 | -11% |       |   |
| SC3-10  | 7.6                  | 2.94                 | -61%  | 12.3  | 14.36                 | 17%                   | 19.4  | 23.62  | 22%                   | 29.1                   | 30.77  | 6%   | 38    | 41.33  | 9%    | 47.7  | 48.66  | 2%   |       |   |
| SC3-11A | 5.3                  | 1.99                 | -62%  | 7.8   | 5.36                  | -31%                  | 11.3  | 8.05   | -29%                  | 15.9                   | 10.06  | -37% | 20    | 13.08  | -35%  | 24.3  | 15.09  | -38% |       |   |
| SC3-11B | 59.4                 | 79.84                | 34%   | 81.3  | 116.98                | 44%                   | 110.8 | 148.27 | 34%                   | 148.1                  | 172.72 | 17%  | 180.5 | 208.2  | 15%   | 213.7 | 231.81 | 8%   |       |   |
| SC3-12  | 77.8                 | 47.61                | -39%  | 105.6 | 71.53                 | -32%                  | 142.5 | 91.34  | -36%                  | 189.1                  | 106.54 | -44% | 229.1 | 129.44 | -44%  | 270   | 144.67 | -46% |       |   |
| SC3-12A |                      | 15.01                |       |       | 24.03                 |                       |       | 31.22  |                       |                        | 36.66  |      |       | 44.86  |       |       | 50.3   |      |       |   |
| SC3-12B |                      | 1.38                 |       |       | 4.03                  |                       |       | 6.23   |                       |                        | 8.01   |      |       | 10.7   |       |       | 12.51  |      |       |   |
| SC3-13  | 43.9                 | 56.24                | 28%   | 57.8  | 80.96                 | 40%                   | 76.5  | 100.72 | 32%                   | 98.5                   | 115.86 | 18%  | 117.6 | 138.53 | 18%   | 136.9 | 153.6  | 12%  |       |   |
| SC3-13A |                      | 2.61                 |       |       | 7.62                  |                       |       | 11.81  |                       |                        | 15.18  |      |       | 20.28  |       |       | 23.7   |      |       |   |
| SC3-14A | 127.6                | 137.91               | 8%    | 175.4 | 201.61                | 15%                   | 239.8 | 260.35 | 9%                    | 321.9                  | 307.16 | -5%  | 393.2 | 373.37 | -5%   | 466.3 | 417.25 | -11% |       |   |
| SC3-14B | 24.6                 | 77.46                | 215%  | 34.3  | 109.84                | 220%                  | 47.4  | 139.54 | 194%                  | 64.2                   | 162.93 | 154% | 79    | 196.7  | 149%  | 94.1  | 218.85 | 133% |       |   |
| SC3-15A | 21.6                 | 13.21                | -39%  | 35.5  | 38.41                 | 8%                    | 56.3  | 59.28  | 5%                    | 85.3                   | 76.32  | -11% | 112.1 | 102.43 | -9%   | 141   | 119.86 | -15% |       |   |
| SC3-15B | 10.8                 | 8.38                 | -22%  | 14    | 12.29                 | -12%                  | 18.2  | 15.45  | -15%                  | 23.3                   | 17.9   | -23% | 27.6  | 21.56  | -22%  | 31.9  | 24     | -25% |       |   |
| SC3-16A | 84.4                 | 206.37               | 145%  | 120.4 | 292.54                | 143%                  | 170   | 371.39 | 118%                  | 234.8                  | 434.23 | 85%  | 292.2 | 523.16 | 79%   | 351.8 | 582.23 | 66%  |       |   |
| SC3-16B | 39                   | 60.38                | 55%   | 53.7  | 82.91                 | 54%                   | 73.6  | 103.49 | 41%                   | 99                     | 119.96 | 21%  | 121.1 | 143.94 | 19%   | 143.8 | 159.74 | 11%  |       |   |
| SC3-17A | 41.8                 | 27.45                | -34%  | 59.6  | 42.18                 | -29%                  | 85.2  | 54.03  | -37%                  | 119                    | 63.03  | -47% | 149.1 | 76.6   | -49%  | 180.6 | 85.6   | -53% |       |   |
| SC3-17B |                      | 34.53                |       |       | 50.54                 |                       |       | 63.5   |                       |                        | 73.46  |      |       | 88.39  |       |       | 98.33  |      |       |   |
| SC3-18  | 49.3                 | 22.75                | -54%  | 67.1  | 32.96                 | -51%                  | 91    | 41.34  | -55%                  | 121.2                  | 47.83  | -61% | 147.3 | 57.56  | -61%  | 174   | 64.05  | -63% |       |   |
| SC3-18B |                      | 1.53                 |       |       | 4.45                  |                       |       | 6.89   |                       |                        | 8.86   |      |       | 11.91  |       |       | 13.95  |      |       |   |
| SC3-19  | 28.8                 | 28                   | -3%   | 47.7  | 78.96                 | 66%                   | 75.7  | 120.84 | 60%                   | 114.4                  | 154.22 | 35%  | 150.2 | 205.45 | 37%   | 188.8 | 239.67 | 27%  |       |   |
| SC3-20  | 9.9                  | 9.29                 | -6%   | 15.5  | 21.02                 | 36%                   | 23.8  | 30.73  | 29%                   | 35.1                   | 38.5   | 10%  | 45.5  | 50.17  | 10%   | 56.6  | 57.99  | 2%   |       |   |
| SC3-21  | 7                    | 9.77                 | 40%   | 10.8  | 20.68                 | 91%                   | 16.3  | 29.45  | 81%                   | 23.7                   | 36.03  | 52%  | 30.4  | 45.92  | 51%   | 37.5  | 52.53  | 40%  |       |   |
| SC3-22  | 9.4                  | 7.15                 | -24%  | 14.8  | 16.35                 | 10%                   | 22.5  | 24.05  | 7%                    | 32.9                   | 30.08  | -9%  | 42.5  | 39.14  | -8%   | 52.6  | 45.22  | -14% |       |   |
| SC3-23  | 5.5                  | 10.92                | 99%   | 8.3   | 22.1                  | 166%                  | 12.4  | 31.23  | 152%                  | 18                     | 38.2   | 112% | 23    | 48.72  | 112%  | 28.4  | 55.73  | 96%  |       |   |
| SC3-24A | 13                   | 6.43                 | -51%  | 20.4  | 15.26                 | -25%                  | 31.1  | 22.51  | -28%                  | 45.7                   | 28.3   | -38% | 59    | 37.09  | -37%  | 73.2  | 42.98  | -41% |       |   |
| SC3-24B | 3.4                  | 1.95                 | -43%  | 5.3   | 4.78                  | -10%                  | 8.1   | 7.12   | -12%                  | 11.8                   | 8.98   | -24% | 15.2  | 11.76  | -23%  | 18.9  | 13.62  | -28% |       |   |
| SC3-25  | 5.8                  | 5.58                 | -4%   | 8.9   | 12.02                 | 35%                   | 13.4  | 17.2   | 28%                   | 19.5                   | 21.1   | 8%   | 25.1  | 26.97  | 7%    | 31    | 30.9   | 0%   |       |   |
| SC3-26  | 2.5                  | 1.66                 | -34%  | 4     | 4.37                  | 9%                    | 6.2   | 6.61   | 7%                    | 9.2                    | 8.4    | -9%  | 12.1  | 11.13  | -8%   | 15.1  | 12.95  | -14% |       |   |
| SC3-27  | 35.1                 | 14.49                | -59%  | 51.2  | 27.87                 | -46%                  | 73.8  | 39.1   | -47%                  | 103.7                  | 48.09  | -54% | 130.3 | 61.8   | -53%  | 158.3 | 70.95  | -55% |       |   |
| SC3-61  | 13.7                 | 5.61                 | -59%  | 22    | 22.4                  | 2%                    | 34.4  | 36.4   | 6%                    | 51.6                   | 47.4   | -8%  | 67.6  | 63.67  | -6%   | 84.8  | 74.61  | -12% |       |   |
| SC3-72  | 12.8                 | 9.55                 | -25%  | 20.2  | 23.84                 | 18%                   | 31.4  | 35.61  | 13%                   | 46.7                   | 44.98  | -4%  | 60.9  | 59.19  | -3%   | 76    | 68.7   | -10% |       |   |
| SC3-73  | 16.4                 | 12.16                | -26%  | 26.4  | 33.03                 | 25%                   | 41.3  | 50.14  | 21%                   | 62.1                   | 63.84  | 3%   | 81.3  | 84.94  | 4%    | 102   | 99.04  | -3%  |       |   |
| SC3-74  | 22.3                 | 22.51                | 1%    | 36.5  | 53.27                 | 46%                   | 57.3  | 79.1   | 38%                   | 85.9                   | 99.77  | 16%  | 112.3 | 131.03 | 17%   | 140.7 | 151.94 | 8%   |       |   |
| SC3-75  | 13.1                 | 11.12                | -15%  | 21.5  | 26.37                 | 23%                   | 33.7  | 38.98  | 16%                   | 50.5                   | 49.21  | -3%  | 66.1  | 64.91  | -2%   | 82.8  | 75.41  | -9%  |       |   |
| SC3-76  | 14.2                 | 10.85                | -24%  | 23.1  | 27.09                 | 17%                   | 36.4  | 40.54  | 11%                   | 54.6                   | 51.45  | -6%  | 71.4  | 68.18  | -5%   | 89.6  | 79.38  | -11% |       |   |
| SC3-77  | 16.6                 | 8.93                 | -46%  | 27.6  | 27.11                 | -2%                   | 43.8  | 42.16  | -4%                   | 66.2                   | 54.46  | -18% | 87    | 73.59  | -15%  | 109.4 | 86.36  | -21% |       |   |
| SC3-78  | 28.1                 | 32.29                | 15%   | 45.3  | 77.46                 | 71%                   | 70.6  | 114.83 | 63%                   | 106.2                  | 144.42 | 36%  | 139.1 | 189.21 | 36%   | 174.5 | 219.17 | 26%  |       |   |
| SC3-79  | 34.9                 | 32.26                | -8%   | 57    | 82.54                 | 45%                   | 89.5  | 123.52 | 38%                   | 134.3                  | 156.01 | 16%  | 175.6 | 205.95 | 17%   | 220.1 | 239.34 | 9%   |       |   |
| SC3-80  | 27.3                 | 22.36                | -18%  | 44.3  | 57.34                 | 29%                   | 69.6  | 86.09  | 24%                   | 104.5                  | 109.14 | 4%   | 136.8 | 144.5  | 6%    | 171.4 | 168.15 | -2%  |       |   |
| SC3-81  | 42.6                 | 26.67                | -37%  | 70.2  | 81                    | 15%                   | 111   | 125.85 | 13%                   | 167.4                  | 162.22 | -3%  | 219.6 | 218.65 | 0%    | 275.7 | 256.32 | -7%  |       |   |
| SC3-82  | 20                   | 17.01                | -15%  | 33.2  | 50.83                 | 53%                   | 52.8  | 79.48  | 51%                   | 80                     | 102.02 | 28%  | 105.1 | 136.18 | 30%   | 132.3 | 158.98 | 20%  |       |   |
| SC3-88  | 10.5                 | 6.28                 | -40%  | 17.4  | 18.99                 | 9%                    | 27.6  | 29.44  | 7%                    | 41.8                   | 37.84  | -9%  | 54.9  | 50.8   | -7%   | 69    | 59.46  | -14% |       |   |
| SC3-89  | 6.1                  | 2.86                 | -53%  | 10    | 8.64                  | -14%                  | 15.7  | 13.39  | -15%                  | 23.6                   | 17.14  | -27% | 30.8  | 22.87  | -26%  | 38.6  | 26.69  | -31% |       |   |
| SCE-1   | 23.3                 | 9.82                 | -58%  | 35.9  | 21.3                  | -41%                  | 53.8  | 30.85  | -43%                  | 79.1                   | 38.58  | -51% | 102.4 | 50.51  | -51%  | 127.4 | 58.52  | -54% |       |   |
| SCE-2   | 4.4                  | 1.42                 | -68%  | 7     | 3.35                  | -52%                  | 10.8  | 4.95   | -54%                  | 15.9                   | 6.27   | -61% | 20.7  | 8.3    | -60%  | 25.7  | 9.66   | -62% |       |   |
| SCE-3   | 30.6                 | 9.63                 | -69%  | 45.2  | 19.25                 | -57%                  | 65.9  | 28.62  | -57%                  | 93.3                   | 36.11  | -61% | 118   | 47.22  | -60%  | 143.9 | 54.72  | -62% |       |   |
| SCE-4   | 13.3                 | 4.16                 | -69%  | 19.6  | 7.52                  | -62%                  | 28.6  | 10.35  | -64%                  | 40.6                   | 12.67  | -69% | 57.8  | 16.29  | -94%  | 62.6  | 18.71  | -70% |       |   |
| SCE-5   | 100.4                | 95.82                | -5%   | 130.6 | 133.18                | 2%                    | 169.6 | 168.48 | -1%                   | 217.4                  | 197.05 | -9%  | 257.8 | 238.47 | -7%   | 298.4 | 265.69 | -11% |       |   |
| SCE-6   | 1.6                  | 0.18                 | -89%  | 2.5   | 0.55                  | -78%                  | 3.7   | 1.03   | -72%                  | 5.4                    | 1.42   | -74% | 7     | 2      | -71%  | 8.6   | 2.39   | -72% |       |   |
| SCE-7   | 58.9                 | 39.33                | -33%  | 75.5  | 54.94                 | -27%                  | 96.6  | 67.52  | -30%                  | 122.2                  | 77.22  | -37% | 143.7 | 91.69  | -36%  | 165.2 | 101.34 | -39% |       |   |
| SCE-8   | 38.6                 | 47.1                 | 22%   | 48.4  | 61.37                 | 27%                   | 60.7  | 73.41  | 21%                   | 75.4                   | 82.94  | 10%  | 87.7  | 97.16  | 11%   | 99.9  | 106.61 | 7%   |       |   |
| SCE-9   | 1.5                  | 0.22                 | -85%  | 2.4   | 0.68                  | -72%                  | 3.6   | 1.27   | -65%                  | 5.3                    | 1.75   | -67% | 6.8   | 2.46   | -64%  | 8.5   | 2.94   | -65% |       |   |
| SCE-10  | 7.6                  | 107.37               | 1313% | 189.4 | 167.39                | -12%                  | 19.4  | 232.98 | 1101%                 | 29.1                   | 286.58 | 885% | 398.9 | 362.01 | -9%   | 467.5 | 411.15 | -12% |       |   |
| SCE-11  | 2.3                  | 0.77                 | -67%  | 3.6   | 2.52                  | -30%                  | 5.5   | 4.75   | -14%                  | 8                      | 6.5    | -19% | 10.3  | 8.93   | -13%  | 12.8  | 10.51  | -18% |       |   |
| SCE-13  | 19.6                 | 10.9                 | -44%  | 31.3  | 25.85                 | -17%                  | 48.7  | 38.21  | -22%                  | 73.1                   | 48.24  | -34% | 95.7  | 63.64  | -34%  | 120   | 73.94  | -38% |       |   |
| SCE-14  | 13.2                 | 8                    | -39%  | 21.2  | 19.04                 | -10%                  | 33.3  | 28.21  | -15%                  | 49.9                   | 35.59  | -29% | 65.2  | 46.77  | -28%  | 81.7  | 54.26  | -34% |       |   |
| SCE-15  | 2.2                  | 13.6                 | 518%  | 5.1   | 27.2                  | 433%                  | 10.1  | 38.53  | 281%                  | 17.7                   | 47.35  | 168% | 25.1  | 60.67  | 142%  | 35.4  | 69.54  | 96%  |       |   |

MDDP Proposed vs. Amendment Proposed Peak Flow Rate Design Point Summary

| Design Point    | MDDP     | Amend    | %      | MDDP       | Amend    | %     | MDDP     | Amend        | %    | MDDP      | Amend     | %    | MDDP       | Amend     | %    | MDDP      | Amend      | %       |
|-----------------|----------|----------|--------|------------|----------|-------|----------|--------------|------|-----------|-----------|------|------------|-----------|------|-----------|------------|---------|
|                 | Q2 (cfs) | Q2 (cfs) |        | Difference | Q5 (cfs) |       | Q5 (cfs) | % Difference |      | Q10 (cfs) | Q10 (cfs) |      | Difference | Q25 (cfs) |      | Q25 (cfs) | Difference |         |
| DP-74           | 39.3     | 33.68    | -14%   | 65.3       | 94.55    | 45%   | 104.8    | 145.74       | 39%  | 158.9     | 187.2     | 18%  | 209.1      | 251.03    | 20%  | 262.8     | 293.76     | 12%     |
| DP-75           | 141.2    | 95.13    | -33%   | 235.1      | 274.57   | 17%   | 376.6    | 427.98       | 14%  | 566.6     | 555.2     | -2%  | 750.9      | 754.29    | 0%   | 950.5     | 887.87     | -7%     |
| DP-77           | 209.9    | 144.08   | -31%   | 351.9      | 426.57   | 21%   | 580.6    | 672.84       | 16%  | 886.6     | 877.81    | -1%  | 1168.4     | 1201.19   | 3%   | 1467.7    | 1423.89    | -3%     |
| DP-78           | 59.7     | 52.82    | -12%   | 98.4       | 138.33   | 41%   | 154      | 210.37       | 37%  | 232.6     | 269.64    | 16%  | 306.2      | 360.98    | 18%  | 385.3     | 422.09     | 10%     |
| DP-73           | 207.5    | 147.29   | -29%   | 354.3      | 442.62   | 25%   | 588.5    | 703.56       | 20%  | 897.1     | 919.74    | 3%   | 1187.2     | 1257.44   | 6%   | 1506.7    | 1497.12    | -1%     |
| DP-72           | 206.2    | 148.04   | -28%   | 352.5      | 450.6    | 28%   | 586.7    | 718.24       | 22%  | 897.2     | 939.53    | 5%   | 1195.3     | 1285.42   | 8%   | 1518.6    | 1527.19    | 1%      |
| DP-71           | 205.9    | 154.76   | -25%   | 349.3      | 475.49   | 36%   | 610.5    | 773.89       | 27%  | 932.4     | 1022.86   | 10%  | 1226.9     | 1389.51   | 13%  | 1612.2    | 1642.96    | 2%      |
| DP-70           | 205.3    | 155.07   | -24%   | 349.8      | 480.21   | 37%   | 614      | 783.11       | 28%  | 940.1     | 1035.54   | 10%  | 1260.6     | 1408.68   | 12%  | 1636.7    | 1665.91    | 2%      |
| DP-69           | 212.7    | 158.17   | -26%   | 366.6      | 521.37   | 42%   | 653.7    | 855.08       | 31%  | 1010.6    | 1134.95   | 12%  | 1364.1     | 1532.12   | 12%  | 1775.7    | 1795.11    | 1%      |
| DP-87           | 216.9    | 151.73   | -30%   | 374.6      | 531.49   | 42%   | 681.9    | 884.92       | 30%  | 1072.1    | 1181.68   | 10%  | 1471.5     | 1613.16   | 10%  | 1905.9    | 1903.95    | 0%      |
| DP-68           | 214.6    | 101.57   | -53%   | 374.5      | 467.33   | 25%   | 714.9    | 897.95       | 26%  | 1187.6    | 1286.67   | 8%   | 1674.9     | 1785.56   | 7%   | 2204.1    | 2095.47    | -5%     |
| DP-64           | 85.9     | 91.34    | 6%     | 112.1      | 135.67   | 21%   | 145.9    | 170.56       | 17%  | 187.5     | 198.05    | 6%   | 222.6      | 238.16    | 7%   | 258       | 264.76     | 3%      |
| DP-63           | 154.4    | 136.83   | -11%   | 201        | 404.27   | 101%  | 375.7    | 684.34       | 82%  | 815.9     | 940.16    | 15%  | 1112.1     | 1293.98   | 16%  | 1385.1    | 1554.72    | 12%     |
| DP-61           | 156.6    | 140.26   | -10%   | 223.9      | 448.63   | 100%  | 428      | 758.6        | 77%  | 928.2     | 1042.07   | 12%  | 1287.3     | 1451.8    | 13%  | 1620.1    | 1816.26    | 12%     |
| DP-60A          | 161.6    | 150.16   | -7%    | 224.8      | 456.15   | 103%  | 439.1    | 769.88       | 75%  | 950.4     | 1056.06   | 11%  | 1320.5     | 1471.37   | 11%  | 1661.8    | 1839.17    | 11%     |
| DP-53A          | 161.6    | 150.2    | -7%    | 225.7      | 456.7    | 102%  | 441.8    | 772.23       | 75%  | 951.1     | 1058.86   | 11%  | 1326       | 1474.82   | 11%  | 1668.9    | 1843.8     | 10%     |
| DP-1E           | 23.9     | 12.41    | -48%   | 38.3       | 29.33    | -23%  | 70.1     | 43.32        | -38% | 132.8     | 54.71     | -59% | 173        | 72.19     | -58% | 220.9     | 83.88      | -62%    |
| DP-2E           | 48.9     | 25       | -49%   | 76.8       | 56.23    | -27%  | 123      | 82.03        | -33% | 228.7     | 103.33    | -55% | 319.7      | 135.61    | -58% | 419.4     | 157.53     | -62%    |
| DP-3E           | 48.5     | 28       | -42%   | 75.7       | 60.94    | -19%  | 122.2    | 88.92        | -27% | 271.1     | 116.05    | -57% | 387.1      | 175.35    | -55% | 500.1     | 221.76     | -56%    |
| DP-4E           | 48.1     | 29.8     | -38%   | 76.2       | 64.13    | -16%  | 122.4    | 93.94        | -23% | 286.9     | 122.72    | -57% | 407.3      | 184.86    | -55% | 534.8     | 230.91     | -57%    |
| DP-56           | 23.1     | 25.44    | 10%    | 35.3       | 46.04    | 30%   | 71.5     | 68.58        | -4%  | 108.3     | 85.35     | -21% | 152.1      | 124.7     | -18% | 196.4     | 145.69     | -26%    |
| DP-8            | 24.1     | 27.54    | 14%    | 37.2       | 49.4     | 33%   | 73.5     | 72.24        | -2%  | 111.3     | 90.17     | -19% | 155.4      | 125.47    | -19% | 200.7     | 147.14     | -27%    |
| DP-21           | 0.6      | 84.32    | 13953% | 8.8        | 145.61   | 1555% | 17.8     | 175.84       | 888% | 57.1      | 176.17    | 209% | 116.8      | 176.17    | 51%  | 174.9     | 176.17     | 1%      |
| DP-22           | 0.6      | 65.06    | 10743% | 8.8        | 126.55   | 1338% | 17.6     | 156.5        | 789% | 56.8      | 156.5     | 176% | 105.1      | 156.5     | 49%  | 156.4     | 156.5      | 0%      |
| DP-25           | 5.9      | 5.58     | -5%    | 9.1        | 12.02    | 32%   | 16.3     | 17.2         | 6%   | 35.1      | 21.1      | -40% | 46.4       | 26.97     | -42% | 58.2      | 30.9       | -47%    |
| DP-26           | 0.1      | 0.74     | 640%   | 1.1        | 9.32     | 747%  | 3.2      | 19.8         | 519% | 7.3       | 32.37     | 343% | 9.5        | 53.15     | 459% | 12        | 68.04      | 467%    |
| EX_STOCK_POND_1 |          | 141.53   |        |            | 512.56   |       |          | 860.4        |      |           | 1154.93   |      |            | 1590.6    |      |           |            | 1874.89 |
| EX_STOCK_POND_2 |          | 155.07   |        |            | 480.21   |       |          | 783.11       |      |           | 1035.54   |      |            | 1408.68   |      |           |            | 1665.91 |
| PNDE7           | 46.5     | 33.49    | -28%   | 75.4       | 70.68    | -6%   | 121.2    | 103.63       | -14% | 285.2     | 134.94    | -53% | 402.4      | 212.81    | -47% | 548       | 269.11     | -51%    |
| PNDW3           | 214.6    | 101.57   | -53%   | 374.5      | 467.33   | 25%   | 714.9    | 897.95       | 26%  | 1187.6    | 1286.68   | 8%   | 1674.9     | 1785.56   | 7%   | 2204.1    | 2095.47    | -5%     |

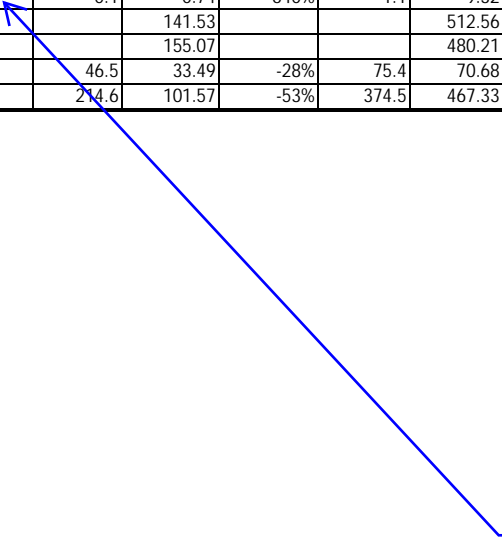

This should address how the flows are handled with the current approved plans and construction. The previous comment was that detention is assumed west of Vollmer, which could be modeled or just mentioned, with the model conveying flows through the approved bypass pipe.

MDDP Proposed vs. Amendment Total Runoff Volume Proposed Design Point Summary

| Design Point | MDDP       | Amend      | % Difference | MDDP       | Amend      | % Difference | MDDP        | Amend       | % Difference | MDDP        | Amend       | % Difference | MDDP        | Amend       | % Difference | MDDP         | Amend        | % Difference |
|--------------|------------|------------|--------------|------------|------------|--------------|-------------|-------------|--------------|-------------|-------------|--------------|-------------|-------------|--------------|--------------|--------------|--------------|
|              | V2 (ac-ft) | V2 (ac-ft) |              | V5 (ac-ft) | V5 (ac-ft) |              | V10 (ac-ft) | V10 (ac-ft) |              | V25 (ac-ft) | V25 (ac-ft) |              | V50 (ac-ft) | V50 (ac-ft) |              | V100 (ac-ft) | V100 (ac-ft) |              |
| DP-74        | 5.9        | 3.03       | -49%         | 9          | 7.67       | -15%         | 13.6        | 11.57       | -15%         | 19.8        | 14.82       | -25%         | 25.5        | 20.04       | -21%         | 31.6         | 23.51        | -26%         |
| DP-75        | 22.7       | 11.05      | -51%         | 34.5       | 28.82      | -16%         | 51.7        | 43.58       | -16%         | 75.4        | 56.16       | -26%         | 97.1        | 75.80       | -22%         | 120.5        | 89.00        | -26%         |
| DP-77        | 37.7       | 18.84      | -50%         | 57.4       | 48.49      | -16%         | 85.9        | 73.04       | -15%         | 125.1       | 93.91       | -25%         | 161.1       | 126.74      | -21%         | 199.9        | 148.53       | -26%         |
| DP-78        | 8.9        | 4.91       | -45%         | 13.5       | 11.69      | -13%         | 20.1        | 17.40       | -13%         | 29.3        | 22.25       | -24%         | 37.7        | 29.86       | -21%         | 46.7         | 34.99        | -25%         |
| DP-73        | 40         | 20.62      | -48%         | 60.8       | 52.17      | -14%         | 91          | 78.56       | -14%         | 132.5       | 100.66      | -24%         | 170.7       | 135.64      | -21%         | 211.7        | 158.97       | -25%         |
| DP-72        | 41.3       | 21.30      | -48%         | 62.9       | 53.71      | -15%         | 94          | 80.71       | -14%         | 136.8       | 103.42      | -24%         | 176.2       | 139.33      | -21%         | 218.5        | 163.26       | -25%         |
| DP-71        | 46.3       | 27.13      | -41%         | 70         | 63.22      | -10%         | 104.3       | 93.29       | -11%         | 151.3       | 118.46      | -22%         | 194.5       | 158.05      | -19%         | 240.8        | 184.75       | -23%         |
| DP-70        | 49.5       | 29.25      | -41%         | 74.5       | 66.29      | -11%         | 110.6       | 96.98       | -12%         | 160.1       | 122.75      | -23%         | 205.4       | 163.26      | -21%         | 254          | 190.58       | -25%         |
| DP-69        | 57.5       | 29.52      | -49%         | 86.1       | 71.50      | -17%         | 127.4       | 106.18      | -17%         | 183.8       | 134.42      | -27%         | 235.3       | 178.30      | -24%         | 290.6        | 207.46       | -29%         |
| DP-87        | 66.5       | 35.91      | -46%         | 98.9       | 83.17      | -16%         | 145.6       | 122.45      | -16%         | 209.1       | 154.36      | -26%         | 267.1       | 204.08      | -24%         | 329.1        | 236.92       | -28%         |
| DP-68        | 81.8       | 53.09      | -35%         | 123.7      | 117.23     | -5%          | 183.9       | 170.94      | -7%          | 264.9       | 214.82      | -19%         | 338         | 282.34      | -16%         | 415.8        | 328.37       | -21%         |
| DP-64        | 7          | 7.58       | 8%           | 9.1        | 10.25      | 13%          | 11.8        | 12.52       | 6%           | 15.2        | 14.33       | -6%          | 18.1        | 17.03       | -6%          | 21.1         | 18.87        | -11%         |
| DP-63        | 85.6       | 59.84      | -30%         | 129.5      | 126.74     | -2%          | 192.3       | 182.60      | -5%          | 276.7       | 228.02      | -18%         | 352.8       | 298.29      | -15%         | 433.5        | 343.71       | -21%         |
| DP-61        | 103.7      | 79.18      | -24%         | 157.8      | 159.89     | 1%           | 235.1       | 227.71      | -3%          | 338.4       | 282.95      | -16%         | 431.3       | 368.26      | -15%         | 529.8        | 423.50       | -20%         |
| DP-60A       | 111        | 87.77      | -21%         | 168.6      | 173.08     | 3%           | 250.4       | 244.90      | -2%          | 359.5       | 302.90      | -16%         | 457.7       | 392.82      | -14%         | 561.5        | 451.12       | -20%         |
| DP-53A       | 112        | 88.38      | -21%         | 170        | 174.00     | 2%           | 252.6       | 246.12      | -3%          | 362.6       | 304.74      | -16%         | 461.7       | 395.88      | -14%         | 566.5        | 454.19       | -20%         |
| DP-1E        | 3.1        | 2.48       | -20%         | 5.2        | 5.19       | 0%           | 8.4         | 7.73        | -8%          | 12.7        | 10.00       | -21%         | 16.6        | 13.56       | -18%         | 20.9         | 15.96        | -24%         |
| DP-2E        | 6.1        | 6.20       | 2%           | 10.4       | 11.94      | 15%          | 16.9        | 17.25       | 2%           | 25.7        | 21.76       | -15%         | 33.7        | 28.79       | -15%         | 42.2         | 33.45        | -21%         |
| DP-3E        | 7          | 15.38      | 120%         | 13.7       | 24.24      | 77%          | 23.4        | 32.53       | 39%          | 36.1        | 39.28       | 9%           | 47.4        | 49.72       | 5%           | 59.3         | 56.77        | -4%          |
| DP-4E        | 7.6        | 21.67      | 185%         | 15.6       | 32.53      | 109%         | 27.2        | 42.35       | 56%          | 43          | 50.64       | 18%          | 57.2        | 63.22       | 11%          | 72           | 71.81        | 0%           |
| DP-56        | 7.7        | 31.61      | 311%         | 16.1       | 46.65      | 190%         | 28.6        | 60.15       | 110%         | 51.3        | 71.81       | 40%          | 71.7        | 89.30       | 25%          | 92.9         | 100.97       | 9%           |
| DP-8         | 8          | 32.84      | 310%         | 16.7       | 48.49      | 190%         | 26.6        | 62.91       | 137%         | 53          | 74.88       | 41%          | 74          | 93.29       | 26%          | 95.9         | 105.88       | 10%          |
| DP-21        | 6.3        | 20.47      | 225%         | 11.3       | 31.00      | 174%         | 18.3        | 39.90       | 118%         | 27.5        | 47.26       | 72%          | 35.6        | 58.31       | 64%          | 44           | 65.67        | 49%          |
| DP-22        | 6.3        | 16.08      | 155%         | 10.7       | 24.40      | 128%         | 16.7        | 31.61       | 89%          | 24.6        | 37.13       | 51%          | 31.5        | 46.03       | 46%          | 38.7         | 51.56        | 33%          |
| DP-25        | 1.3        | 0.31       | -76%         | 1.9        | 0.61       | -68%         | 2.8         | 0.87        | -69%         | 4.1         | 1.08        | -74%         | 5.2         | 1.42        | -73%         | 6.4          | 1.65         | -74%         |
| DP-26        | 0.7        | 2.01       | 188%         | 0.9        | 4.73       | 425%         | 1.2         | 7.03        | 486%         | 1.5         | 8.93        | 495%         | 1.8         | 11.97       | 565%         | 2.1          | 13.99        | 566%         |



| Summary of Peak Discharges         |     |     |      |      |      |      |
|------------------------------------|-----|-----|------|------|------|------|
| Design Point 75                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 141 | 235 | 377  | 567  | 751  | 951  |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 971  |
| 2018 Developed Cond. (cfs)         | 141 | 235 | 377  | 567  | 751  | 951  |
| 2021 Developed Cond. (cfs)         | 95  | 275 | 428  | 555  | 754  | 888  |
| Design Point 77                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | n/a | n/a | n/a  | n/a  | n/a  | n/a  |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      |      |
| 2018 Developed Cond. (cfs)         | 210 | 352 | 581  | 887  | 1168 | 1468 |
| 2021 Developed Cond. (cfs)         | 144 | 428 | 674  | 880  | 1204 | 1423 |
| 1996 DBPS Existing Cond. (cfs)     |     |     |      |      |      | 2193 |
| 1996 DBPS Developed Cond. (cfs)    |     |     |      |      |      | 2262 |
| Design Point 73                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 226 | 381 | 618  | 957  | 1260 | 1582 |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 1672 |
| 2018 Developed Cond. (cfs)         | 208 | 354 | 589  | 897  | 1187 | 1507 |
| 2021 Developed Cond. (cfs)         | 147 | 442 | 703  | 919  | 1258 | 1497 |
| Design Point 71                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 229 | 389 | 630  | 979  | 1277 | 1638 |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 1735 |
| 2018 Developed Cond. (cfs)         | 206 | 349 | 611  | 932  | 1227 | 1612 |
| 2021 Developed Cond. (cfs)         | 150 | 482 | 776  | 1018 | 1379 | 1643 |
| Design Point 69                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 253 | 435 | 708  | 1100 | 1453 | 1870 |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 1988 |
| 2018 Developed Cond. (cfs)         | 213 | 367 | 654  | 1011 | 1364 | 1776 |
| 2021 Developed Cond. (cfs)         | 153 | 536 | 871  | 1149 | 1564 | 1795 |
| Design Point 68                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | n/a | n/a | n/a  | n/a  | n/a  | n/a  |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      |      |
| 2018 Developed Cond. w/o Pnd (cfs) | 215 | 375 | 715  | 1188 | 1675 | 2204 |
| 2021 Developed Cond. (cfs)         |     |     |      |      |      |      |
| 2018 Developed w/Pnd (cfs) Pnd W3  | 154 | 200 | 367  | 800  | 1086 | 1351 |
| 2021 Developed Cond. w/ Pnd(cfs)   | 98  | 513 | 952  | 1336 | 1863 | 2095 |
| Design Point 63                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 251 | 431 | 713  | 1113 | 1496 | 1912 |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 1981 |
| 2018 Developed Cond. w/o Pnd (cfs) | 213 | 373 | 721  | 1198 | 1705 | 2237 |
| 2018 Developed w/Pnd (cfs)         | 154 | 201 | 376  | 816  | 1112 | 1385 |
| 2021 Developed Cond. w/ Pnd(cfs)   | 130 | 432 | 723  | 981  | 1348 | 1554 |
| 2011 Wilson (cfs)                  |     |     | 1066 |      |      | 1791 |
| 1996 DBPS Existing Cond. (cfs)     |     |     |      |      |      | 2508 |
| 1996 DBPS Developed Cond. (cfs)    |     |     |      |      |      | 2689 |
| Design Point 61                    |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | n/a | n/a | n/a  | n/a  | n/a  | n/a  |
| 2018 Developed Cond. w/o Pnd (cfs) | 214 | 375 | 783  | 1370 | 1967 | 2607 |
| 2018 Developed w/Pnd (cfs)         | 157 | 224 | 428  | 928  | 1287 | 1620 |
| 2021 Developed Cond. w/ Pnd(cfs)   |     |     |      |      |      | 1816 |
| 2011 Wilson (cfs)                  |     |     | 1232 |      |      | 2087 |
| Design Point 60a                   |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 248 | 430 | 707  | 1113 | 1497 | 1914 |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 1969 |
| 2018 Developed Cond. w/o Pnd (cfs) | 216 | 378 | 795  | 1395 | 2004 | 2645 |
| 2018 Developed w/Pnd (cfs)         | 162 | 225 | 439  | 950  | 1321 | 1662 |
| 2021 Developed Cond. w/ Pnd(cfs)   | 133 | 480 | 802  | 1091 | 1518 | 1839 |
| 2011 Wilson (cfs)                  |     |     | 1265 |      |      | 2133 |
| 1996 DBPS Existing Cond. (cfs)     |     |     |      |      |      | 2629 |
| 1996 DBPS Developed Cond. (cfs)    |     |     |      |      |      | 3295 |
| Design Point 53a                   |     |     |      |      |      |      |
| Storm Event (YR)                   | 2   | 5   | 10   | 25   | 50   | 100  |
| 2016 Existing Cond. (cfs)          | 262 | 454 | 763  | 1197 | 1610 | 2062 |
| 2021 Existing Cond. (cfs)          |     |     |      |      |      | 2198 |
| 2018 Developed Cond. w/o Pnd (cfs) | 215 | 378 | 792  | 1392 | 2009 | 2657 |
| 2018 Developed w/Pnd (cfs)         | 162 | 226 | 442  | 951  | 1326 | 1669 |
| 2021 Developed Cond. w/ Pnd(cfs)   | 142 | 488 | 817  | 1109 | 1542 | 1843 |

| Full Spectrum Detention Pond Updates |                               |                |                   |                                 |             |                              |                    |                |                    |                   |                    |
|--------------------------------------|-------------------------------|----------------|-------------------|---------------------------------|-------------|------------------------------|--------------------|----------------|--------------------|-------------------|--------------------|
| MDDP By M&S                          |                               |                |                   | Proposed Designs By JR & Others |             |                              |                    |                |                    |                   |                    |
| Name                                 | Peak Inflow                   | Stored Volume  | Peak Release Rate | Name                            | Design Firm | Peak Inflow                  | Percent Difference | Stored Volume  | Percent Difference | Peak Release Rate | Percent Difference |
|                                      | 100-YR (cfs) From MDDP By M&S | 100-YR (ac-ft) | 100-YR (cfs)      |                                 |             | 100-YR (cfs) From MDDP By JR |                    | 100-YR (ac-ft) |                    | 100-YR (cfs)      |                    |
| FSD1                                 | 68.9                          | 2.2            | 25.4              |                                 | Unchanged   | 77.21                        | 12%                | 2.3            | 5%                 | 25.4              | 0%                 |
| FSD5                                 | 129.1                         | 5.2            | 30.1              | Pond 1                          | Matrix      | 150.8                        | 17%                | 6.2            | 19%                | 3.7               | -88%               |
| FSD6                                 | 608.6                         | 26.0           | 149.6             | Pond W-6                        | JR          | 610                          | 0%                 | 24.9           | -4%                | 139.3             | -7%                |
| FSD9                                 | 410.1                         | 13.8           | 289.9             | Pond W-4                        | JR          | 386                          | -6%                | 10.8           | -22%               | 264.75            | -9%                |
| FSD11A                               | 24.3                          | 0.6            | 12.3              | Removed                         |             |                              |                    |                |                    |                   |                    |
| FSD11B                               | 213.7                         | 8.2            | 69.5              |                                 | JR          | 209.4                        | -2%                | 6.7            | -18%               | 77                | 11%                |
| FSD12                                | 270.0                         | 8.9            | 103.1             | Pond 4                          | M&S         | 205.1                        | -24%               | 5.8            | -35%               | 103.1             | 0%                 |
| Added - FSD12A                       |                               |                |                   | Pond 1                          | M&S         | 48.9                         |                    | 1.4            |                    | 23.4              |                    |
| FSD13                                | 136.9                         | 5.0            | 47.2              | Pond 8                          | M&S         | 153.6                        | 12%                | 5.1            | 2%                 | 43.8              | -7%                |
| FSD14A                               | 466.3                         | 17.3           | 142.2             |                                 | JR          | 425.6                        | -9%                | 16.6           | -4%                | 176.2             | 24%                |
| FSD14B                               | 94.1                          | 3.8            | 19.3              |                                 | Unchanged   | 215.7                        | 129%               | 10.2           | 168%               | 19.3              | 0%                 |
| FSD15B                               | 31.9                          | 1.0            | 12                |                                 | Unchanged   | 135.5                        | 325%               | 6.2            | 520%               | 68.04             | 467%               |
| FSD16A                               | 351.8                         | 13.8           | 128.3             |                                 | JR          | 179.1                        | 65%                | 17.5           | 27%                | 128.3             | 0%                 |
| FSD16B                               | 143.8                         | 5.8            | 28.1              |                                 | JR          | 143.8                        | 0%                 | 6.7            | 16%                | 28.2              | 0%                 |
| FSD17                                | 180.6                         | 4.7            | 86.1              | Pond C                          | JR          | 74.0                         | -59%               | 2.7            | -43%               | 26.7              | -69%               |
| Added - FSD17B                       |                               |                |                   | Pond B                          | JR          | 69.3                         |                    | 2.8            |                    | 24.3              |                    |
| FSD18                                | 174                           | 5.3            | 69.6              | Pond A                          | JR          | 75.5                         | -57%               | 2.9            | -45%               | 32.2              | -54%               |
| FSD20                                | 56.6                          | 1.2            | 42.4              |                                 | Unchanged   | 62.9                         | 11%                | 0.5            | -58%               | 44.35             | 5%                 |
| FSD21                                | 37.5                          | 0.8            | 30.1              |                                 | Unchanged   | 51.3                         | 37%                | 0.9            | 13%                | 30.3              | 1%                 |
| FSD22                                | 52.6                          | 1.0            | 43.8              | Pond 1                          | Classic     | 56.5                         | 7%                 | 1.5            | 50%                | 24                | -45%               |
| FSD23                                | 28.4                          | 0.6            | 18.6              |                                 | Unchanged   | 22.6                         | -20%               | 0.1            | -83%               | 21.17             | 14%                |
| FSD27                                | 206.3                         | 4.2            | 161.9             | Pond 2                          | Classic     | 167.3                        | -19%               | 6.9            | 64%                | 91.9              | -43%               |
| FSD72                                | 76.0                          | 1.3            | 73.4              |                                 | Unchanged   | 68.7                         | -10%               | 1.2            | -8%                | 62.1              | -15%               |
| Added                                |                               |                |                   | EX Stock Pond 1                 | JR          | 1977.6                       |                    | 36.0           |                    | 1897.2            |                    |
| Added                                |                               |                |                   | EX stock Pond 2                 |             | 1648.7                       |                    | 8.7            |                    | 1644.8            |                    |
| PNDW3                                | 2204.1                        | 78.2           | 1350.6            |                                 | JR          | 2202.2                       | 0%                 | 50.6           | -35%               | 1486.64           | 10%                |
| FSD-E1                               | 127.4                         | 2.5            | 84                |                                 | Unchanged   | 58.5                         | -54%               | 4.4            | 76%                | 21.81             | -74%               |
| FSD-E2                               | 143.9                         | 3.8            | 74.7              |                                 | Unchanged   | 54.7                         | -62%               | 4.2            | 11%                | 21.11             | -72%               |
| FSD-E3                               | 298.4                         | 11.4           | 101.3             |                                 | Unchanged   | 224.7                        | -25%               | 13.6           | 19%                | 56.99             | -44%               |
| FSD-E4                               | 165.2                         | 6.9            | 43.6              |                                 | Unchanged   | 101.3                        | -39%               | 5.3            | -23%               | 4.91              | -89%               |
| FSD-E5                               | 99.9                          | 5.3            | 10                |                                 | Unchanged   | 106.6                        | 7%                 | 5.8            | 9%                 | 3.8               | -62%               |
| FSD-E6                               | 467.5                         | 23.7           | 123.3             |                                 | Unchanged   | 441.6                        | -6%                | 22.2           | -6%                | 56.78             | -54%               |
| PND-E7                               | 548                           | 28.0           | 196.4             |                                 | Unchanged   | 263.9                        | -52%               | 16             | -43%               | 144.77            | -26%               |

verify values

[TITLE]

::Project Title/Notes  
Sterling Ranch 2021 MDDP Amendment  
50-YR Type II Storm

[OPTIONS]

::Option Value  
FLOW\_UNITS CFS  
INFILTRATION HORTON  
FLOW\_ROUTING KINWAVE  
LINK\_OFFSETS DEPTH  
MIN\_SLOPE 0  
ALLOW\_PONDING NO  
SKIP\_STEADY\_STATE NO

START\_DATE 01/01/2005  
START\_TIME 00:00:00  
REPORT\_START\_DATE 01/01/2005  
REPORT\_START\_TIME 00:00:00  
END\_DATE 01/04/2005  
END\_TIME 06:00:00  
SWEEP\_START 01/01  
SWEEP\_END 12/31  
DRY\_DAYS 0  
REPORT\_STEP 00:05:00  
WET\_STEP 00:05:00  
DRY\_STEP 01:00:00  
ROUTING\_STEP 0:00:30

INERTIAL\_DAMPING PARTIAL  
NORMAL\_FLOW\_LIMITED BOTH  
FORCE\_MAIN\_EQUATION H-W  
VARIABLE\_STEP 0.75  
LENGTHENING\_STEP 0  
MIN\_SURFAREA 12.557  
MAX\_TRIALS 8  
HEAD\_TOLERANCE 0.005  
SYS\_FLOW\_TOL 5  
LAT\_FLOW\_TOL 5  
MINIMUM\_STEP 0.5  
THREADS 1

[FILES]

::Interfacing Files  
USE INFLOWS "2518804 CUHP SWMM - PROP Conditions-100YR 24hr Storm.xlsm.txt"

[EVAPORATION]

::Data Source Parameters  
::-----  
CONSTANT 0.0  
DRY\_ONLY NO

[JUNCTIONS]

::Name Elevation MaxDepth InitDepth SurDepth Aponded  
::-----  
79 295 0 0 0 0  
80 331 0 0 0 0

|                         |       |   |   |   |   |
|-------------------------|-------|---|---|---|---|
| 81                      | 229   | 0 | 0 | 0 | 0 |
| DP-1E                   | 258.9 | 0 | 0 | 0 | 0 |
| DP-21                   | 184.2 | 0 | 0 | 0 | 0 |
| DP-22                   | 224.2 | 0 | 0 | 0 | 0 |
| DP-25                   | 332.2 | 0 | 0 | 0 | 0 |
| DP-26                   | 199.2 | 0 | 0 | 0 | 0 |
| DP-2E                   | 218.9 | 0 | 0 | 0 | 0 |
| DP-3E                   | 128.9 | 0 | 0 | 0 | 0 |
| DP-4E                   | 60.5  | 0 | 0 | 0 | 0 |
| DP-53A                  | 0     | 0 | 0 | 0 | 0 |
| DP-56                   | 32    | 0 | 0 | 0 | 0 |
| DP-60A                  | 22.2  | 0 | 0 | 0 | 0 |
| DP-61                   | 63.2  | 0 | 0 | 0 | 0 |
| DP-63                   | 98.2  | 0 | 0 | 0 | 0 |
| DP-64                   | 93.2  | 0 | 0 | 0 | 0 |
| DP-68                   | 118.4 | 0 | 0 | 0 | 0 |
| DP-69                   | 203.2 | 0 | 0 | 0 | 0 |
| DP-70                   | 229.2 | 0 | 0 | 0 | 0 |
| DP-71                   | 257.2 | 0 | 0 | 0 | 0 |
| DP-72                   | 283.2 | 0 | 0 | 0 | 0 |
| DP-73                   | 300.2 | 0 | 0 | 0 | 0 |
| DP-74                   | 497.2 | 0 | 0 | 0 | 0 |
| DP-75                   | 432.2 | 0 | 0 | 0 | 0 |
| DP-77                   | 340.2 | 0 | 0 | 0 | 0 |
| DP-78                   | 462.2 | 0 | 0 | 0 | 0 |
| DP-8                    | 0     | 0 | 0 | 0 | 0 |
| DP-87                   | 157.2 | 0 | 0 | 0 | 0 |
| FSD9_OUTLET             | 139.2 | 0 | 0 | 0 | 0 |
| FSDE1_Outlet            | 264.9 | 0 | 0 | 0 | 0 |
| FSDE2_Outlet            | 228.9 | 0 | 0 | 0 | 0 |
| FSDE4_Outlet            | 97.6  | 0 | 0 | 0 | 0 |
| PNDW3_Outfall           | 118.2 | 0 | 0 | 0 | 0 |
| SC3-10                  | 63.2  | 0 | 0 | 0 | 0 |
| SC3-11A                 | 98.2  | 0 | 0 | 0 | 0 |
| SC3-11B                 | 98.2  | 0 | 0 | 0 | 0 |
| SC3-12                  | 157.2 | 0 | 0 | 0 | 0 |
| SC3-12A                 | 157.2 | 0 | 0 | 0 | 0 |
| SC3-13                  | 118.6 | 0 | 0 | 0 | 0 |
| SC3-14A                 | 118.5 | 0 | 0 | 0 | 0 |
| SC3-14B                 | 184.2 | 0 | 0 | 0 | 0 |
| SC3-15A                 | 199.2 | 0 | 0 | 0 | 0 |
| SC3-15B                 | 199.2 | 0 | 0 | 0 | 0 |
| SC3-16A                 | 224.2 | 0 | 0 | 0 | 0 |
| SC3-16B                 | 224.2 | 0 | 0 | 0 | 0 |
| SC3-17A                 | 230.2 | 0 | 0 | 0 | 0 |
| ;Homestead North Pond C |       |   |   |   |   |
| SC3-17B                 | 258.2 | 0 | 0 | 0 | 0 |
| ;Homestead North Pond A |       |   |   |   |   |
| SC3-18                  | 203.2 | 0 | 0 | 0 | 0 |
| SC3-18B                 | 203.2 | 0 | 0 | 0 | 0 |
| SC3-19                  | 245.2 | 0 | 0 | 0 | 0 |
| SC3-1A                  | 0     | 0 | 0 | 0 | 0 |
| SC3-20                  | 324.2 | 0 | 0 | 0 | 0 |
| SC3-21                  | 332.2 | 0 | 0 | 0 | 0 |
| SC3-22                  | 283.2 | 0 | 0 | 0 | 0 |
| SC3-23                  | 295.2 | 0 | 0 | 0 | 0 |
| SC3-24A                 | 300.2 | 0 | 0 | 0 | 0 |

|         |       |   |   |   |   |
|---------|-------|---|---|---|---|
| SC3-24B | 283.2 | 0 | 0 | 0 | 0 |
| SC3-25  | 332.2 | 0 | 0 | 0 | 0 |
| SC3-26  | 257.2 | 0 | 0 | 0 | 0 |
| SC3-27  | 257.2 | 0 | 0 | 0 | 0 |
| SC3-5A  | 22.2  | 0 | 0 | 0 | 0 |
| SC3-5B  | 0     | 0 | 0 | 0 | 0 |
| SC3-61  | 28.2  | 0 | 0 | 0 | 0 |
| SC3-6A  | 87.2  | 0 | 0 | 0 | 0 |
| SC3-6B  | 93.2  | 0 | 0 | 0 | 0 |
| SC3-6C  | 63.2  | 0 | 0 | 0 | 0 |
| SC3-7   | 117.2 | 0 | 0 | 0 | 0 |
| SC3-72  | 340.2 | 0 | 0 | 0 | 0 |
| SC3-73  | 432.2 | 0 | 0 | 0 | 0 |
| SC3-74  | 497.2 | 0 | 0 | 0 | 0 |
| SC3-75  | 432.2 | 0 | 0 | 0 | 0 |
| SC3-76  | 432.2 | 0 | 0 | 0 | 0 |
| SC3-77  | 340.2 | 0 | 0 | 0 | 0 |
| SC3-78  | 462.2 | 0 | 0 | 0 | 0 |
| SC3-79  | 562.2 | 0 | 0 | 0 | 0 |
| SC3-8   | 247.2 | 0 | 0 | 0 | 0 |
| SC3-80  | 552.2 | 0 | 0 | 0 | 0 |
| SC3-81  | 532.2 | 0 | 0 | 0 | 0 |
| SC3-82  | 562.2 | 0 | 0 | 0 | 0 |
| SC3-88  | 340.2 | 0 | 0 | 0 | 0 |
| SC3-89  | 375.2 | 0 | 0 | 0 | 0 |
| SC3-9   | 139.2 | 0 | 0 | 0 | 0 |
| SCE-1   | 266   | 0 | 0 | 0 | 0 |
| SCE-10  | 32.5  | 0 | 0 | 0 | 0 |
| SCE-11  | 32.5  | 0 | 0 | 0 | 0 |
| SCE-13  | 258.9 | 0 | 0 | 0 | 0 |
| SCE-14  | 218.9 | 0 | 0 | 0 | 0 |
| SCE-15  | 0     | 0 | 0 | 0 | 0 |
| SCE-2   | 258.9 | 0 | 0 | 0 | 0 |
| SCE-3   | 230   | 0 | 0 | 0 | 0 |
| SCE-4   | 218.9 | 0 | 0 | 0 | 0 |
| SCE-5   | 128.9 | 0 | 0 | 0 | 0 |
| SCE-6   | 128.9 | 0 | 0 | 0 | 0 |
| SCE-7   | 98    | 0 | 0 | 0 | 0 |
| SCE-8   | 60.5  | 0 | 0 | 0 | 0 |
| SCE-9   | 60.5  | 0 | 0 | 0 | 0 |
| SC3-12B | 157.2 | 0 | 0 | 0 | 0 |
| SC3-13A | 118.6 | 0 | 0 | 0 | 0 |

[OUTFALLS]

| Name        | Elevation | Type | Stage Data | Gated | Route To |
|-------------|-----------|------|------------|-------|----------|
| SC3_OUTFALL | 0         | FREE |            | NO    |          |
| SCE_OUTFALL | 0         | FREE |            | NO    |          |

[STORAGE]

| Name  | Elev. | MaxDepth | InitDepth | Shape   | Curve Name/Params | N/A | Fevap | Psi | Ksat | IMD |
|---|-------|----------|-----------|---------|-------------------|-----|-------|-----|------|-----|
| ;Pond 1 from Aspen Meadows FDR by Matrix dated 01/19  |       |          |           |         |                   |     |       |     |      |     |
| FSD05   | 22.2  | 9        | 0         | TABULAR | FSD05_Storage     | 0   | 0     |     |      |     |
| ;Pond W-5 From SR Filing 2 Drainage Report by JR 4/21 |       |          |           |         |                   |     |       |     |      |     |
| FSD06   | 63.2  | 10.5     | 0         | TABULAR | FSD06_Storage     | 0   | 0     |     |      |     |
| ;Pond W-4 From SR Filing 2 Report by JR 4/21          |       |          |           |         |                   |     |       |     |      |     |

|  |       |       |   |         |                |   |   |
|--|-------|-------|---|---------|----------------|---|---|
| FSD09  | 139.2 | 11    | 0 | TABULAR | FSD09_Storage  | 0 | 0 |
| FSD1   | 0     | 9     | 0 | TABULAR | FSD01_Storage  | 0 | 0 |
| ;Pond FSD11B From Sterling Ranch Phase 3 Prelim DR by JR Dated 12/20 |       |       |   |         |                |   |   |
| FSD11B   | 98.2  | 9     | 0 | TABULAR | FSD11B_Storage | 0 | 0 |
| ;Pond 4 Sterling Ranch F1 by M&S 7/16                                |       |       |   |         |                |   |   |
| FSD12  | 157   | 9     | 0 | TABULAR | FSD12_Storage  | 0 | 0 |
| ;Pond 8 Sterling Ranch F1 by M&S 7/16                                |       |       |   |         |                |   |   |
| FSD13  | 118.5 | 10.5  | 0 | TABULAR | FSD13_Storage  | 0 | 0 |
| ;Pond FSD14A From Sterling Ranch Phase 3 Prelim DR by JR Dated 12/20 |       |       |   |         |                |   |   |
| FSD14A   | 118.4 | 9     | 0 | TABULAR | FSD14A_Storage | 0 | 0 |
| FSD14B   | 184.2 | 10    | 0 | TABULAR | FSD14B_Storage | 0 | 0 |
| FSD15B   | 199.2 | 12.24 | 0 | TABULAR | FSD15B         | 0 | 0 |
| FSD16A   | 224.2 | 12    | 0 | TABULAR | FSD16A_Storage | 0 | 0 |
| FSD16B   | 224.2 | 10    | 0 | TABULAR | FSD16B_Storage | 0 | 0 |
| ;Homestead North Pond B  |       |       |   |         |                |   |   |
| FSD17A   | 230.2 | 9.9   | 0 | TABULAR | FSD17A_Storage | 0 | 0 |
| ;Homestead North Pond C  |       |       |   |         |                |   |   |
| FSD17B   | 258.2 | 9     | 0 | TABULAR | FSD17B_Storage | 0 | 0 |
| ;Homestead North Pond A  |       |       |   |         |                |   |   |
| FSD18  | 203.2 | 9     | 0 | TABULAR | FSD18_Storage  | 0 | 0 |
| FSD20  | 324.2 | 9     | 0 | TABULAR | FSD20_Storage  | 0 | 0 |
| FSD21  | 332.2 | 9     | 0 | TABULAR | FSD21_Storage  | 0 | 0 |
| ;Pond 1 in Retreat at Timber Ridge by Classic Engineering dated 6/20 |       |       |   |         |                |   |   |
| FSD22  | 283.2 | 8     | 0 | TABULAR | FSD22_Storage  | 0 | 0 |
| FSD23  | 296   | 9     | 0 | TABULAR | FSD23_Storage  | 0 | 0 |
| ;Pond 2 in Retreat at Timber Ridge by Classic Engineering dated 6/20 |       |       |   |         |                |   |   |
| FSD27  | 257.2 | 10    | 0 | TABULAR | FSD27_Storage  | 0 | 0 |
| FSD72  | 340.2 | 9     | 0 | TABULAR | FSD72_Storage  | 0 | 0 |
| FSDE1  | 266   | 9     | 0 | TABULAR | FSDE1_Storage  | 0 | 0 |
| FSDE2  | 230   | 9     | 0 | TABULAR | FSDE2_Storage  | 0 | 0 |
| FSDE3  | 128.9 | 9     | 0 | TABULAR | FSDE3_Storage  | 0 | 0 |
| FSDE4  | 98    | 10    | 0 | TABULAR | FSDE4_Storage  | 0 | 0 |
| FSDE5  | 60.5  | 9     | 0 | TABULAR | FSDE5_Storage  | 0 | 0 |
| PNDE7  | 32.5  | 9     | 0 | TABULAR | PNDE7_Storage  | 0 | 0 |
| FSDE6  | 32.5  | 9     | 0 | TABULAR | FSDE6_Storage  | 0 | 0 |
| PNDW3  | 118.3 | 11    | 0 | TABULAR | PNDW3_Storage  | 0 | 0 |
| ;Existing Stock Pond 1   |       |       |   |         |                |   |   |
| EX_STOCK_POND_1  | 142   | 12    | 0 | TABULAR | EX_STOCKPOND   | 0 | 0 |
| ;Pond 1 From Homestead Filing 2 by M&S, dated 1/20                   |       |       |   |         |                |   |   |
| FSD12A   | 157   | 9.83  | 0 | TABULAR | FSD12A_Storage | 0 | 0 |
| EX_STOCK_POND_2  | 229.1 | 7     | 0 | TABULAR | EX_STOCKPOND_2 | 0 | 0 |

[CONDUITS]

| ::Name  | From Node   | To Node         | Length | Roughness | InOffset | OutOffset | InitFlow | MaxFlow |
|---------|-------------|-----------------|--------|-----------|----------|-----------|----------|---------|
| ;;----- |             |                 |        |           |          |           |          |         |
| RT-1    | SC3-81      | DP-75           | 3975   | .05       | 0        | 0         | 0        | 0       |
| RT-10A  | SC3-19      | DP-69           | 1940   | 0.05      | 0        | 0         | 0        | 0       |
| RT-10B  | DP-26       | DP-87           | 1940   | 0.013     | 0        | 0         | 0        | 0       |
| RT-11A  | 81          | DP-69           | 1275   | 0.05      | 0        | 0         | 0        | 0       |
| RT-11B  | DP-69       | DP-87           | 2960   | 0.05      | 0        | 0         | 0        | 0       |
| RT-11C  | DP-87       | EX_STOCK_POND_1 | 2590   | 0.05      | 0        | 0         | 0        | 0       |
| RT-12A  | DP-22       | DP-21           | 2260   | 0.013     | 0        | 0         | 0        | 0       |
| RT-12B  | DP-21       | DP-68           | 1925   | 0.013     | 0        | 0         | 0        | 0       |
| RT-16   | SC3-6A      | FSD06           | 1250   | 0.013     | 0        | 0         | 0        | 0       |
| RT-17B  | FSD9_OUTLET | DP-61           | 3375   | 0.013     | 0        | 0         | 0        | 0       |
| RT-18   | DP-61       | DP-60A          | 2500   | 0.05      | 0        | 0         | 0        | 0       |
| RT-19   | SC3-61      | DP-60A          | 1200   | 0.013     | 0        | 0         | 0        | 0       |

|        |              |        |      |       |   |   |   |   |
|--------|--------------|--------|------|-------|---|---|---|---|
| RT-1E  | FSDE1_Outlet | DP-1E  | 300  | .021  | 0 | 0 | 0 | 0 |
| RT-2   | SC3-80       | DP-75  | 4570 | 0.05  | 0 | 0 | 0 | 0 |
| RT-20  | DP-60A       | DP-53A | 400  | 0.05  | 0 | 0 | 0 | 0 |
| RT-21  | DP-25        | FSD27  | 3300 | 0.013 | 0 | 0 | 0 | 0 |
| RT-22  | 79           | FSD27  | 2000 | .013  | 0 | 0 | 0 | 0 |
| RT-2E  | DP-1E        | DP-2E  | 2000 | .02   | 0 | 0 | 0 | 0 |
| RT-3   | SC3-82       | DP-74  | 2360 | .05   | 0 | 0 | 0 | 0 |
| RT-3E  | FSDE2_Outlet | DP-2E  | 400  | .021  | 0 | 0 | 0 | 0 |
| RT-4   | DP-74        | DP-75  | 2695 | 0.05  | 0 | 0 | 0 | 0 |
| RT-4E  | DP-2E        | DP-3E  | 3600 | 0.021 | 0 | 0 | 0 | 0 |
| RT-5   | DP-75        | DP-77  | 4100 | 0.05  | 0 | 0 | 0 | 0 |
| RT-5E  | DP-3E        | DP-4E  | 1250 | 0.021 | 0 | 0 | 0 | 0 |
| RT-6   | SC3-79       | DP-78  | 3030 | 0.05  | 0 | 0 | 0 | 0 |
| RT-6B  | DP-78        | DP-77  | 6145 | 0.05  | 0 | 0 | 0 | 0 |
| RT-6E  | FSDE4_Outlet | DP-4E  | 1485 | 0.021 | 0 | 0 | 0 | 0 |
| RT-7A  | SC3-89       | DP-77  | 1035 | .013  | 0 | 0 | 0 | 0 |
| RT-7E  | DP-4E        | PNDE7  | 1410 | 0.021 | 0 | 0 | 0 | 0 |
| RT-8   | FSD20        | DP-73  | 625  | 0.013 | 0 | 0 | 0 | 0 |
| RT-9A  | DP-77        | DP-73  | 2600 | 0.05  | 0 | 0 | 0 | 0 |
| RT-9B  | DP-73        | DP-72  | 760  | 0.05  | 0 | 0 | 0 | 0 |
| RT-9C  | DP-72        | DP-71  | 1450 | 0.05  | 0 | 0 | 0 | 0 |
| RT-9D  | DP-71        | DP-70  | 1490 | 0.05  | 0 | 0 | 0 | 0 |
| RT-14  | DP-63        | DP-61  | 1765 | 0.05  | 0 | 0 | 0 | 0 |
| 1      | SC3-74       | DP-74  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 2      | SC3-73       | DP-75  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 3      | SC3-75       | DP-75  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 4      | SC3-76       | DP-75  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 5      | SC3-78       | DP-78  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 6      | SC3-72       | FSD72  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 7      | SC3-77       | DP-77  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 8      | SC3-88       | DP-77  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 9      | SCE-1        | FSDE1  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 10     | SCE-2        | DP-1E  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 11     | SC3-26       | DP-71  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 12     | SC3-27       | FSD27  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 13     | SC3-23       | FSD23  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 14     | SC3-21       | FSD21  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 15     | SC3-25       | DP-25  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 16     | SC3-24B      | DP-72  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 17     | SC3-22       | FSD22  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 18     | SC3-17B      | FSD17B | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 20     | SC3-20       | FSD20  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 22     | SC3-14B      | FSD14B | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 24     | SC3-14A      | FSD14A | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 25     | SC3-13       | FSD13  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 27     | SCE-7        | FSDE4  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 28     | SCE-8        | FSDE5  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 29     | SCE-5        | FSDE3  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 30     | SC3-16B      | FSD16B | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 34     | SC3-18       | FSD18  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 36     | SCE-3        | FSDE2  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 37     | SCE-4        | DP-2E  | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 38     | SC3-9        | FSD09  | 1    | 0.05  | 0 | 0 | 0 | 0 |
| RT-17A | SC3-8        | FSD09  | 5000 | 0.04  | 0 | 0 | 0 | 0 |
| 39     | SC3-15A      | FSD15B | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 40     | SC3-15B      | FSD15B | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 42     | SC3-12       | FSD12  | 1    | 0.05  | 0 | 0 | 0 | 0 |

|        |         |                 |      |       |   |   |   |   |
|--------|---------|-----------------|------|-------|---|---|---|---|
| 44     | SCE-11  | PNDE7           | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 45     | SCE-9   | DP-4E           | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 46     | SCE-6   | DP-3E           | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 47     | SCE-14  | DP-2E           | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 48     | SCE-13  | DP-1E           | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 51     | SCE-10  | FSDE6           | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 54     | SC3-11B | FSD11B          | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 56     | SC3-11A | FSD06           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 58     | DP-68   | PNDW3           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 63     | SC3-5A  | FSD05           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 65     | SC3-1A  | FSD1            | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 67     | DP-53A  | SC3_OUTFALL     | 1    | 0.05  | 0 | 0 | 0 | 0 |
| RT-15A | SC3-7   | DP-64           | 900  | 0.013 | 0 | 0 | 0 | 0 |
| RT-15B | DP-64   | FSD06           | 1450 | 0.013 | 0 | 0 | 0 | 0 |
| 69     | SC3-6C  | FSD06           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 70     | SC3-6B  | DP-64           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| RT-25  | DP-56   | DP-8            | 1300 | .05   | 0 | 0 | 0 | 0 |
| 71     | DP-8    | SCE_OUTFALL     | 400  | 0.01  | 0 | 0 | 0 | 0 |
| 74     | SC3-10  | DP-61           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 75     | SC3-24A | DP-73           | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 77     | SC3-5B  | DP-60A          | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 78     | SC3-17A | FSD17A          | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 79     | SC3-16A | FSD16A          | 1    | 0.05  | 0 | 0 | 0 | 0 |
| 80     | 80      | DP-73           | 1389 | .013  | 0 | 0 | 0 | 0 |
| 81     | SC3-12A | FSD12A          | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 82     | SCE-15  | DP-8            | 1    | 0.01  | 0 | 0 | 0 | 0 |
| 83     | SC3-18B | DP-69           | 1    | .035  | 0 | 0 | 0 | 0 |
| 84     | DP-70   | EX_STOCK_POND_2 | 1    | 0.035 | 0 | 0 | 0 | 0 |
| 85     | SC3-12B | DP-87           | 1    | .035  | 0 | 0 | 0 | 0 |
| 86     | SC3-13A | DP-68           | 1    | .035  | 0 | 0 | 0 | 0 |

[OUTLETS]

| ;;Name   | From Node | To Node      | Offset | Type          | QTable/Qcoeff | Qexpon | Gated |
|--|-----------|--------------|--------|---------------|---------------|--------|-------|
| FSD01_Outlet                                   | FSD1      | DP-53A       | 0      | TABULAR/DEPTH | FSD01_Outlet  |        | NO    |
| ;From Aspend Meadows FDR by Matrix dated 01/19 |           |              |        |               |               |        |       |
| FSD05_Outlet                                   | FSD05     | DP-60A       | 0      | TABULAR/DEPTH | FSD05_Outlet  |        | NO    |
| FSD06_Outlet                                   | FSD06     | DP-61        | 0      | TABULAR/DEPTH | FSD06_Outlet  |        | NO    |
| ;Rough calc based on Prelim Sizing             |           |              |        |               |               |        |       |
| FSD11B_Outlet                                  | FSD11B    | DP-63        | 0      | TABULAR/DEPTH | FSD11B_Outlet |        | NO    |
| FSD12_Outlet                                   | FSD12     | DP-87        | 0      | TABULAR/DEPTH | FSD12_Outlet  |        | NO    |
| FSD13_Outlet                                   | FSD13     | DP-68        | 0      | TABULAR/DEPTH | FSD13_Outlet  |        | NO    |
| ;Rough calc based on Prelim Pond sizing        |           |              |        |               |               |        |       |
| FSD14A_Outlet                                  | FSD14A    | DP-68        | 0      | TABULAR/DEPTH | FSD14A_Outlet |        | NO    |
| FSD14B_Outlet                                  | FSD14B    | DP-21        | 0      | TABULAR/DEPTH | FSD14B_Outlet |        | NO    |
| FSD15B_Outlet                                  | FSD15B    | DP-26        | 0      | TABULAR/DEPTH | FSD15B_Outlet |        | NO    |
| FSD16A_Outlet                                  | FSD16A    | DP-22        | 0      | TABULAR/DEPTH | FSD16A_Outlet |        | NO    |
| FSD16B_Outlet                                  | FSD16B    | DP-22        | 0      | TABULAR/DEPTH | FSD16B_Outlet |        | NO    |
| FSD17B_Outlet                                  | FSD17B    | DP-71        | 0      | TABULAR/DEPTH | FSD17B_Outlet |        | NO    |
| FSD18_Outlet                                   | FSD18     | DP-69        | 0      | TABULAR/DEPTH | FSD18_Outlet  |        | NO    |
| FSD21_Outlet                                   | FSD21     | 80           | 0      | TABULAR/DEPTH | FSD21_Outlet  |        | NO    |
| ;From Retreat at Timber Ridge F1 FDR           |           |              |        |               |               |        |       |
| FSD22_Outlet                                   | FSD22     | DP-72        | 0      | TABULAR/DEPTH | FSD22_Outlet  |        | NO    |
| FSD72_Outlet                                   | FSD72     | DP-77        | 0      | TABULAR/DEPTH | FSD72_Outlet  |        | NO    |
| FSD9_Outlet                                    | FSD09     | FSD9_OUTLET  | 0      | TABULAR/DEPTH | FSD09_Outlet  |        | NO    |
| FSDE2_Outlet                                   | FSDE2     | FSDE2_Outlet | 0      | TABULAR/DEPTH | FSDE2_Outlet  |        | NO    |
| FSDE3_Outlet                                   | FSDE3     | DP-3E        | 0      | TABULAR/DEPTH | FSDE3_Outlet  |        | NO    |



|                                      |                 |              |   |               |                       |    |
|--------------------------------------|-----------------|--------------|---|---------------|-----------------------|----|
| FSDE4_Outlet                         | FSDE4           | FSDE4_Outlet | 0 | TABULAR/DEPTH | FSDE4_Outlet          | NO |
| FSDE5_Outlet                         | FSDE5           | DP-4E        | 0 | TABULAR/DEPTH | FSDE5_Outlet          | NO |
| FSDE6_Outlet                         | FSDE6           | PNDE7        | 0 | TABULAR/DEPTH | FSDE6_Outlet          | NO |
| FSDE1_Outlet                         | FSDE1           | FSDE1_Outlet | 0 | TABULAR/DEPTH | FSDE1_Outlet          | NO |
| PNDE7_Outlet                         | PNDE7           | DP-56        | 0 | TABULAR/DEPTH | FSDE7_Outlet          | NO |
| FSD17A_Outlet                        | FSD17A          | DP-70        | 0 | TABULAR/DEPTH | FSD17A_Outlet         | NO |
| PNDW3_Outlet                         | PNDW3           | DP-63        | 0 | TABULAR/DEPTH | PNDW3                 | NO |
| ;From Retreat at Timber Ridge F1 FDR |                 |              |   |               |                       |    |
| FSD27_Outlet                         | FSD27           | DP-71        | 0 | TABULAR/DEPTH | FSD27_Outlet          | NO |
| EX_STOCK_POND_1_OUTFALL              | EX_STOCK_POND_1 | DP-68        | 0 | TABULAR/DEPTH | EX_STOCK_POND         | NO |
| FSD23_Outlet                         | FSD23           | 79           | 0 | TABULAR/DEPTH | FSD23_Outlet          | NO |
| FSD12A_Outlet                        | FSD12A          | DP-87        | 0 | TABULAR/DEPTH | FSD12A_Outlet         | NO |
| EX_STOCK_POND_2_OUTLET               | EX_STOCK_POND_2 | 81           | 0 | TABULAR/DEPTH | EX_STOCKPOND_2_Outlet | NO |

[XSECTIONS]

| ;;Link | Shape | Geom1 | Geom2 | Geom3 | Geom4 | Barrels | Culvert |
|--------|-------|-------|-------|-------|-------|---------|---------|
|--------|-------|-------|-------|-------|-------|---------|---------|

;;-----

|        |             |     |    |    |    |   |  |
|--------|-------------|-----|----|----|----|---|--|
| RT-1   | TRAPEZOIDAL | 20  | 6  | 10 | 10 | 1 |  |
| RT-10A | CIRCULAR    | 5   | 0  | 0  | 0  | 1 |  |
| RT-10B | CIRCULAR    | 5   | 0  | 0  | 0  | 1 |  |
| RT-11A | TRAPEZOIDAL | 20  | 30 | 6  | 6  | 1 |  |
| RT-11B | TRAPEZOIDAL | 20  | 30 | 6  | 6  | 1 |  |
| RT-11C | TRAPEZOIDAL | 20  | 40 | 6  | 6  | 1 |  |
| RT-12A | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-12B | CIRCULAR    | 4.5 | 0  | 0  | 0  | 1 |  |
| RT-16  | CIRCULAR    | 3.5 | 0  | 0  | 0  | 1 |  |
| RT-17B | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-18  | TRAPEZOIDAL | 20  | 40 | 6  | 6  | 1 |  |
| RT-19  | CIRCULAR    | 6   | 0  | 0  | 0  | 1 |  |
| RT-1E  | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-2   | TRAPEZOIDAL | 20  | 6  | 10 | 10 | 1 |  |
| RT-20  | TRAPEZOIDAL | 20  | 40 | 6  | 6  | 1 |  |
| RT-21  | CIRCULAR    | 3.5 | 0  | 0  | 0  | 1 |  |
| RT-22  | CIRCULAR    | 3   | 0  | 0  | 0  | 1 |  |
| RT-2E  | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-3   | TRAPEZOIDAL | 20  | 6  | 10 | 10 | 1 |  |
| RT-3E  | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-4   | TRAPEZOIDAL | 20  | 6  | 10 | 10 | 1 |  |
| RT-4E  | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-5   | TRAPEZOIDAL | 20  | 10 | 6  | 6  | 1 |  |
| RT-5E  | CIRCULAR    | 5   | 0  | 0  | 0  | 1 |  |
| RT-6   | TRAPEZOIDAL | 20  | 6  | 10 | 10 | 1 |  |
| RT-6B  | TRAPEZOIDAL | 20  | 6  | 10 | 10 | 1 |  |
| RT-6E  | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-7A  | CIRCULAR    | 4   | 0  | 0  | 0  | 1 |  |
| RT-7E  | CIRCULAR    | 6   | 0  | 0  | 0  | 1 |  |
| RT-8   | CIRCULAR    | 2   | 0  | 0  | 0  | 1 |  |
| RT-9A  | TRAPEZOIDAL | 20  | 30 | 6  | 6  | 1 |  |
| RT-9B  | TRAPEZOIDAL | 20  | 30 | 6  | 6  | 1 |  |
| RT-9C  | TRAPEZOIDAL | 20  | 30 | 6  | 6  | 1 |  |
| RT-9D  | TRAPEZOIDAL | 20  | 30 | 6  | 6  | 1 |  |
| RT-14  | TRAPEZOIDAL | 20  | 40 | 6  | 6  | 1 |  |
| 1      | DUMMY       | 0   | 0  | 0  | 0  | 1 |  |
| 2      | DUMMY       | 0   | 0  | 0  | 0  | 1 |  |
| 3      | DUMMY       | 0   | 0  | 0  | 0  | 1 |  |
| 4      | DUMMY       | 0   | 0  | 0  | 0  | 1 |  |
| 5      | DUMMY       | 0   | 0  | 0  | 0  | 1 |  |

|        |             |    |    |   |   |   |
|--------|-------------|----|----|---|---|---|
| 6      | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 7      | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 8      | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 9      | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 10     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 11     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 12     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 13     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 14     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 15     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 16     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 17     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 18     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 20     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 22     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 24     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 25     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 27     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 28     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 29     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 30     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 34     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 36     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 37     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 38     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| RT-17A | TRAPEZOIDAL | 20 | 4  | 4 | 4 | 1 |
| 39     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 40     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 42     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 44     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 45     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 46     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 47     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 48     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 51     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 54     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 56     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 58     | TRAPEZOIDAL | 20 | 40 | 6 | 6 | 1 |
| 63     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 65     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 67     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| RT-15A | CIRCULAR    | 4  | 0  | 0 | 0 | 1 |
| RT-15B | CIRCULAR    | 6  | 0  | 0 | 0 | 1 |
| 69     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 70     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| RT-25  | TRAPEZOIDAL | 10 | 6  | 6 | 6 | 1 |
| 71     | CIRCULAR    | 1  | 0  | 0 | 0 | 1 |
| 74     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 75     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 77     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 78     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 79     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 80     | CIRCULAR    | 3  | 0  | 0 | 0 | 1 |
| 81     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 82     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 83     | DUMMY       | 0  | 0  | 0 | 0 | 1 |
| 84     | DUMMY       | 0  | 0  | 0 | 0 | 1 |

|    |       |   |   |   |   |   |
|----|-------|---|---|---|---|---|
| 85 | DUMMY | 0 | 0 | 0 | 0 | 1 |
| 86 | DUMMY | 0 | 0 | 0 | 0 | 1 |

[CURVES]

| ::Name | Type | X-Value | Y-Value |
|--------|------|---------|---------|
|--------|------|---------|---------|

```

;-----;
FSD01_Outlet Rating 0 0
FSD01_Outlet 2.16 0.1
FSD01_Outlet 2.1625 1.7
FSD01_Outlet 2.37 3.3
FSD01_Outlet 2.67 10.9
FSD01_Outlet 3.03 17.5
FSD01_Outlet 3.33 25.5

```

```

;
FSD05_Outlet Rating 0 0
FSD05_Outlet 2.71 0.1
FSD05_Outlet 3.05 0.4
FSD05_Outlet 3.27 0.5
FSD05_Outlet 3.50375 3.2
FSD05_Outlet 4.04 3.6
FSD05_Outlet 4.44 3.7

```

```

;
FSD06_Outlet Rating 0 0
FSD06_Outlet 4.13 1.7
FSD06_Outlet 5.98 3.0
FSD06_Outlet 6.77 3.4
FSD06_Outlet 7.35 5.1
FSD06_Outlet 7.76 38.8
FSD06_Outlet 8.05 77.3
FSD06_Outlet 8.43 139.3

```

```

;
FSD09_Outlet Rating 0 0
FSD09_Outlet 3.58 1.1
FSD09_Outlet 4.55 1.4
FSD09_Outlet 5.30 7.7
FSD09_Outlet 6.04 43.3
FSD09_Outlet 7.15 141.1
FSD09_Outlet 7.83 219.9
FSD09_Outlet 8.71 285.0

```

```

;
FSD11A_Outlet Rating 0 0
FSD11A_Outlet 3.33 0.1
FSD11A_Outlet 3.335 1.6
FSD11A_Outlet 3.57 3.2
FSD11A_Outlet 3.95 7.5
FSD11A_Outlet 4.45 9.7
FSD11A_Outlet 4.94 12.4

```

```

;
FSD11B_Outlet Rating 0 0
FSD11B_Outlet 3.28 0.8
FSD11B_Outlet 4.58 1.1
FSD11B_Outlet 4.65 9.1
FSD11B_Outlet 4.70 19.1
FSD11B_Outlet 4.77 39.4
FSD11B_Outlet 4.82 55.1
FSD11B_Outlet 4.89 77.0
;

```

|              |        |      |       |
|--------------|--------|------|-------|
| FSD12_Outlet | Rating | 0    | 0     |
| FSD12_Outlet |        | 2.77 | 0     |
| FSD12_Outlet |        | 4.50 | 0     |
| FSD12_Outlet |        | 4.93 | 13.2  |
| FSD12_Outlet |        | 5.21 | 26.7  |
| FSD12_Outlet |        | 5.51 | 62.0  |
| FSD12_Outlet |        | 5.78 | 80.2  |
| FSD12_Outlet |        | 6.33 | 103.1 |

;

|              |        |      |      |
|--------------|--------|------|------|
| FSD13_Outlet | Rating | 0    | 0    |
| FSD13_Outlet |        | 2.85 | 0.3  |
| FSD13_Outlet |        | 4.80 | 0.8  |
| FSD13_Outlet |        | 5.14 | 5    |
| FSD13_Outlet |        | 5.51 | 13.4 |
| FSD13_Outlet |        | 5.90 | 26.3 |
| FSD13_Outlet |        | 6.19 | 37.8 |
| FSD13_Outlet |        | 6.59 | 43.8 |

;

|               |        |      |       |
|---------------|--------|------|-------|
| FSD14A_Outlet | Rating | 0    | 0     |
| FSD14A_Outlet |        | 1.3  | 1.5   |
| FSD14A_Outlet |        | 3.06 | 3.9   |
| FSD14A_Outlet |        | 3.35 | 19.3  |
| FSD14A_Outlet |        | 3.59 | 40.9  |
| FSD14A_Outlet |        | 3.97 | 87.2  |
| FSD14A_Outlet |        | 4.22 | 123.3 |
| FSD14A_Outlet |        | 4.56 | 176.2 |

;

|               |        |      |      |
|---------------|--------|------|------|
| FSD14B_Outlet | Rating | 0    | 0    |
| FSD14B_Outlet |        | 3.1  | 0    |
| FSD14B_Outlet |        | 3.5  | 0.3  |
| FSD14B_Outlet |        | 4.3  | 0.5  |
| FSD14B_Outlet |        | 4.31 | 5.7  |
| FSD14B_Outlet |        | 4.35 | 11.8 |
| FSD14B_Outlet |        | 4.6  | 19.3 |

;

|               |        |       |       |
|---------------|--------|-------|-------|
| FSD15B_Outlet | Rating | 0     | 0     |
| FSD15B_Outlet |        | 3.32  | 0.7   |
| FSD15B_Outlet |        | 4.27  | 0.8   |
| FSD15B_Outlet |        | 4.80  | 2.3   |
| FSD15B_Outlet |        | 6.22  | 20.6  |
| FSD15B_Outlet |        | 7.11  | 43.8  |
| FSD15B_Outlet |        | 8.35  | 91.5  |
| FSD15B_Outlet |        | 9.02  | 124.0 |
| FSD15B_Outlet |        | 9.96  | 170.1 |
| FSD15B_Outlet |        | 10.83 | 467.1 |

;

|               |        |      |       |
|---------------|--------|------|-------|
| FSD16A_Outlet | Rating | 0    | 0     |
| FSD16A_Outlet |        | 5    | 0.6   |
| FSD16A_Outlet |        | 5.01 | 8.8   |
| FSD16A_Outlet |        | 5.53 | 17.3  |
| FSD16A_Outlet |        | 6.21 | 56.2  |
| FSD16A_Outlet |        | 6.91 | 88.4  |
| FSD16A_Outlet |        | 7.59 | 128.3 |

;

|               |        |      |     |
|---------------|--------|------|-----|
| FSD16B_Outlet | Rating | 0    | 0   |
| FSD16B_Outlet |        | 3.91 | 0   |
| FSD16B_Outlet |        | 4.7  | 0.4 |

|               |          |      |
|---------------|----------|------|
| FSD16B_Outlet | 5.6      | 0.7  |
| FSD16B_Outlet | 5.61     | 8.3  |
| FSD16B_Outlet | 5.75     | 17.2 |
| FSD16B_Outlet | 6.14     | 28.2 |
| ;             |          |      |
| FSD17B_Outlet | Rating 0 | 0    |
| FSD17B_Outlet | 2.81     | 0.2  |
| FSD17B_Outlet | 4.56     | 1.8  |
| FSD17B_Outlet | 4.99     | 7.8  |
| FSD17B_Outlet | 5.25     | 13.6 |
| FSD17B_Outlet | 5.62     | 25.2 |
| FSD17B_Outlet | 5.87     | 31.0 |
| FSD17B_Outlet | 6.55     | 33.0 |
| FSD17B_Outlet | 7.79     | 90.5 |
| ;             |          |      |
| FSD18_Outlet  | Rating 0 | 0    |
| FSD18_Outlet  | 2.58     | 0.2  |
| FSD18_Outlet  | 4.27     | 0.9  |
| FSD18_Outlet  | 4.70     | 3.9  |
| FSD18_Outlet  | 5.01     | 9    |
| FSD18_Outlet  | 5.38     | 18.4 |
| FSD18_Outlet  | 5.61     | 25.7 |
| FSD18_Outlet  | 6.00     | 32.2 |
| ;             |          |      |
| FSD17A_Outlet | Rating 0 | 0    |
| FSD17A_Outlet | 3.13     | 0.2  |
| FSD17A_Outlet | 4.18     | 1.0  |
| FSD17A_Outlet | 4.34     | 3.4  |
| FSD17A_Outlet | 4.50     | 6.8  |
| FSD17A_Outlet | 4.73     | 13.4 |
| FSD17A_Outlet | 4.88     | 18.2 |
| FSD17A_Outlet | 5.09     | 25.4 |
| FSD17A_Outlet | 5.75     | 67.6 |
| ;             |          |      |
| FSD20_Outlet  | Rating 0 | 0    |
| FSD20_Outlet  | 3.6      | 0.4  |
| FSD20_Outlet  | 3.6055   | 5.5  |
| FSD20_Outlet  | 3.64     | 11.1 |
| FSD20_Outlet  | 3.94     | 25.7 |
| FSD20_Outlet  | 4.335    | 33.1 |
| FSD20_Outlet  | 4.83     | 42.5 |
| ;             |          |      |
| FSD21_Outlet  | Rating 0 | 0    |
| FSD21_Outlet  | 2.385    | 0.3  |
| FSD21_Outlet  | 2.3855   | 4.0  |
| FSD21_Outlet  | 2.645    | 8.0  |
| FSD21_Outlet  | 2.9      | 12   |
| FSD21_Outlet  | 3.23     | 14   |
| FSD21_Outlet  | 3.52     | 16   |
| ;             |          |      |
| FSD22_Outlet  | Rating 0 | 0    |
| FSD22_Outlet  | 2.22     | 0.1  |
| FSD22_Outlet  | 3.05     | 0.2  |
| FSD22_Outlet  | 3.18     | 0.17 |
| FSD22_Outlet  | 4.00     | 3.8  |
| FSD22_Outlet  | 4.67     | 17.5 |
| FSD22_Outlet  | 5.11     | 22.3 |

```

FSD22_Outlet      6.22  24.0
;
FSD23_Outlet Rating  0    0
FSD23_Outlet      2    0.2
FSD23_Outlet      2.0025  2.4
FSD23_Outlet      2.22  4.9
FSD23_Outlet      2.47  11.2
FSD23_Outlet      2.77  14.5
FSD23_Outlet      3.1   18.6
;
FSD27_Outlet Rating  0    0
FSD27_Outlet      3.65  0.5
FSD27_Outlet      5.15  0.8
FSD27_Outlet      5.37  0.858
FSD27_Outlet      6.24  17.1
FSD27_Outlet      7.13  62.2
FSD27_Outlet      7.61  85.9
FSD27_Outlet      8.91  91.9
;
FSD72_Outlet Rating  0    0
FSD72_Outlet      4.35  0.6
FSD72_Outlet      4.3525  9.6
FSD72_Outlet      4.58  19.3
FSD72_Outlet      4.61  44.4
FSD72_Outlet      4.83  57.4
FSD72_Outlet      5.065  73.4
;
FSD77_Outlet Rating  0    0
FSD77_Outlet      2.82  1.6
FSD77_Outlet      2.83  23.7
FSD77_Outlet      3.01  48.1
FSD77_Outlet      3.29  112.2
FSD77_Outlet      3.6   145.1
FSD77_Outlet      3.930  186.9
;
FSD81_Outlet Rating  0    0
FSD81_Outlet      4.68  2.4
FSD81_Outlet      4.686  36.7
FSD81_Outlet      4.931  74.5
FSD81_Outlet      5.210  174.3
FSD81_Outlet      5.536  225.5
FSD81_Outlet      5.882  290.9
;
FSD82_Outlet Rating  0    0
FSD82_Outlet      2.13  1.1
FSD82_Outlet      2.14  16.4
FSD82_Outlet      2.29  33.4
FSD82_Outlet      2.53  78.1
FSD82_Outlet      2.84  101.1
FSD82_Outlet      3.21  130.4
;
FSD88_Outlet Rating  0    0
FSD88_Outlet      1.543  0.8
FSD88_Outlet      1.5435  12.6
FSD88_Outlet      1.67  26.2
FSD88_Outlet      1.825  59.7
FSD88_Outlet      2.02  77.3

```

|              |          |      |
|--------------|----------|------|
| FSD88_Outlet | 2.245    | 99.5 |
| ;            |          |      |
| FSDE1_Outlet | Rating 0 | 0    |
| FSDE1_Outlet | 4.03     | 0.4  |
| FSDE1_Outlet | 5.39     | 1.7  |
| FSDE1_Outlet | 6.68     | 14.7 |
| FSDE1_Outlet | 7.36     | 39.5 |
| FSDE1_Outlet | 8.74     | 66.9 |
| FSDE1_Outlet | 10.24    | 71.7 |
| FSDE1_Outlet | 12.29    | 77.8 |
| ;            |          |      |
| FSDE2_Outlet | Rating 0 | 0    |
| FSDE2_Outlet | 2.99     | 2.6  |
| FSDE2_Outlet | 4.74     | 5.7  |
| FSDE2_Outlet | 6.03     | 8.1  |
| FSDE2_Outlet | 6.81     | 24.4 |
| FSDE2_Outlet | 7.57     | 56.1 |
| FSDE2_Outlet | 8.19     | 70.0 |
| FSDE2_Outlet | 9.42     | 73.8 |
| ;            |          |      |
| FSDE3_Outlet | Rating 0 | 0    |
| FSDE3_Outlet | 3.02     | 1.1  |
| FSDE3_Outlet | 5.53     | 6.1  |
| FSDE3_Outlet | 6.11     | 8.6  |
| FSDE3_Outlet | 6.73     | 21.6 |
| FSDE3_Outlet | 7.29     | 45   |
| FSDE3_Outlet | 7.71     | 67.4 |
| FSDE3_Outlet | 8.36     | 70.5 |
| ;            |          |      |
| FSDE4_Outlet | Rating 0 | 0    |
| FSDE4_Outlet | 2.86     | 0.5  |
| FSDE4_Outlet | 5.55     | 4.4  |
| FSDE4_Outlet | 5.66     | 4.7  |
| FSDE4_Outlet | 6.36     | 6.1  |
| FSDE4_Outlet | 7.21     | 7.5  |
| FSDE4_Outlet | 7.94     | 8.4  |
| FSDE4_Outlet | 8.68     | 10.7 |
| ;            |          |      |
| FSDE5_Outlet | Rating 0 | 0    |
| FSDE5_Outlet | 2.8      | 0.6  |
| FSDE5_Outlet | 5.76     | 1.2  |
| FSDE5_Outlet | 6        | 1.3  |
| FSDE5_Outlet | 6.58     | 2.1  |
| FSDE5_Outlet | 7.13     | 2.5  |
| FSDE5_Outlet | 7.67     | 3.8  |
| ;            |          |      |
| FSDE6_Outlet | Rating 0 | 0    |
| FSDE6_Outlet | 3.25     | 1.3  |
| FSDE6_Outlet | 5.56     | 9.4  |
| FSDE6_Outlet | 5.94     | 10.3 |
| FSDE6_Outlet | 7.19     | 38.9 |
| FSDE6_Outlet | 7.81     | 68.8 |
| FSDE6_Outlet | 8.75     | 71.8 |
| ;            |          |      |
| PNDW3        | Rating 0 | 0    |
| PNDW3        | 2.24     | 260  |
| PNDW3        | 3.86     | 520  |

|       |       |      |
|-------|-------|------|
| PNDW3 | 5.38  | 780  |
| PNDW3 | 6.81  | 1040 |
| PNDW3 | 8.29  | 1300 |
| PNDW3 | 9.86  | 1550 |
| PNDW3 | 11.10 | 1820 |
| PNDW3 | 11.66 | 2080 |
| PNDW3 | 12.17 | 2340 |
| PNDW3 | 12.64 | 2600 |

;

|               |        |      |         |
|---------------|--------|------|---------|
| EX_STOCK_POND | Rating | 0    | 0       |
| EX_STOCK_POND |        | 7.9  | 0       |
| EX_STOCK_POND |        | 8    | 0       |
| EX_STOCK_POND |        | 8.5  | 109.6   |
| EX_STOCK_POND |        | 9    | 310     |
| EX_STOCK_POND |        | 9.5  | 569.5   |
| EX_STOCK_POND |        | 10   | 876.8   |
| EX_STOCK_POND |        | 10.5 | 1225.5  |
| EX_STOCK_POND |        | 11   | 1610.8  |
| EX_STOCK_POND |        | 11.5 | 1970.5  |
| EX_STOCK_POND |        | 12   | 2106.55 |

;

|              |        |     |     |
|--------------|--------|-----|-----|
| FSDE7_Outlet | Rating | 0   | 0   |
| FSDE7_Outlet |        | 1   | 13  |
| FSDE7_Outlet |        | 2   | 40  |
| FSDE7_Outlet |        | 3   | 80  |
| FSDE7_Outlet |        | 4   | 95  |
| FSDE7_Outlet |        | 5   | 135 |
| FSDE7_Outlet |        | 6   | 150 |
| FSDE7_Outlet |        | 7.3 | 185 |
| FSDE7_Outlet |        | 7.9 | 200 |
| FSDE7_Outlet |        | 8.1 | 225 |

;

|               |        |      |      |
|---------------|--------|------|------|
| FSD12A_Outlet | Rating | 0    | 0    |
| FSD12A_Outlet |        | 3.35 | 0.1  |
| FSD12A_Outlet |        | 5.72 | 0.2  |
| FSD12A_Outlet |        | 5.96 | 0.7  |
| FSD12A_Outlet |        | 6.44 | 6.0  |
| FSD12A_Outlet |        | 6.91 | 15.8 |
| FSD12A_Outlet |        | 7.15 | 22.3 |
| FSD12A_Outlet |        | 7.75 | 23.4 |

;

|                       |        |      |             |
|-----------------------|--------|------|-------------|
| EX_STOCKPOND_2_Outlet | Rating | 0    | 0           |
| EX_STOCKPOND_2_Outlet |        | 3.75 | 0           |
| EX_STOCKPOND_2_Outlet |        | 4    | 38.75       |
| EX_STOCKPOND_2_Outlet |        | 4.25 | 109.6015511 |
| EX_STOCKPOND_2_Outlet |        | 4.5  | 201.3509064 |
| EX_STOCKPOND_2_Outlet |        | 4.75 | 310         |
| EX_STOCKPOND_2_Outlet |        | 5    | 433.2381706 |
| EX_STOCKPOND_2_Outlet |        | 5.25 | 569.5063652 |
| EX_STOCKPOND_2_Outlet |        | 5.5  | 717.6600431 |
| EX_STOCKPOND_2_Outlet |        | 5.75 | 876.8124087 |
| EX_STOCKPOND_2_Outlet |        | 6    | 1046.25     |
| EX_STOCKPOND_2_Outlet |        | 6.25 | 1225.382593 |
| EX_STOCKPOND_2_Outlet |        | 6.5  | 1413.711317 |
| EX_STOCKPOND_2_Outlet |        | 6.75 | 1610.807251 |
| EX_STOCKPOND_2_Outlet |        | 7    | 1816.296455 |

;



|               |         |   |       |
|---------------|---------|---|-------|
| FSD01_Storage | Storage | 0 | 0     |
| FSD01_Storage |         | 1 | 30456 |
| FSD01_Storage |         | 2 | 33376 |
| FSD01_Storage |         | 3 | 36424 |
| FSD01_Storage |         | 4 | 39600 |
| FSD01_Storage |         | 5 | 42906 |
| FSD01_Storage |         | 6 | 46336 |
| FSD01_Storage |         | 7 | 49896 |
| FSD01_Storage |         | 8 | 53584 |
| FSD01_Storage |         | 9 | 57400 |

;

|               |         |     |       |
|---------------|---------|-----|-------|
| FSD05_Storage | Storage | 0   | 77    |
| FSD05_Storage |         | 0.5 | 77    |
| FSD05_Storage |         | 1.5 | 77    |
| FSD05_Storage |         | 2   | 4494  |
| FSD05_Storage |         | 3   | 50208 |
| FSD05_Storage |         | 4   | 54337 |
| FSD05_Storage |         | 5   | 58563 |
| FSD05_Storage |         | 6   | 62889 |
| FSD05_Storage |         | 7   | 67315 |
| FSD05_Storage |         | 8   | 71840 |

;

|               |         |      |        |
|---------------|---------|------|--------|
| FSD06_Storage | Storage | 0    | 20     |
| FSD06_Storage |         | 0.5  | 1328   |
| FSD06_Storage |         | 1.5  | 13823  |
| FSD06_Storage |         | 2.5  | 40724  |
| FSD06_Storage |         | 3.5  | 71720  |
| FSD06_Storage |         | 4.5  | 112095 |
| FSD06_Storage |         | 5.5  | 136106 |
| FSD06_Storage |         | 6.5  | 158377 |
| FSD06_Storage |         | 7.5  | 174976 |
| FSD06_Storage |         | 8.5  | 188903 |
| FSD06_Storage |         | 9.5  | 199637 |
| FSD06_Storage |         | 10.5 | 210510 |

;

|               |         |    |        |
|---------------|---------|----|--------|
| FSD09_Storage | Storage | 0  | 20     |
| FSD09_Storage |         | 1  | 7181   |
| FSD09_Storage |         | 2  | 30115  |
| FSD09_Storage |         | 3  | 49313  |
| FSD09_Storage |         | 4  | 52785  |
| FSD09_Storage |         | 5  | 74559  |
| FSD09_Storage |         | 6  | 79051  |
| FSD09_Storage |         | 7  | 84185  |
| FSD09_Storage |         | 8  | 98917  |
| FSD09_Storage |         | 9  | 94245  |
| FSD09_Storage |         | 10 | 99228  |
| FSD09_Storage |         | 11 | 104318 |

;

|                |         |   |       |
|----------------|---------|---|-------|
| FSD11A_Storage | Storage | 0 | 0     |
| FSD11A_Storage |         | 1 | 3864  |
| FSD11A_Storage |         | 2 | 5000  |
| FSD11A_Storage |         | 3 | 6264  |
| FSD11A_Storage |         | 4 | 7656  |
| FSD11A_Storage |         | 5 | 9196  |
| FSD11A_Storage |         | 6 | 10824 |
| FSD11A_Storage |         | 7 | 12600 |
| FSD11A_Storage |         | 8 | 14504 |

```

;
FSD11B_Storage Storage 0 20
FSD11B_Storage 1 6880
FSD11B_Storage 2 25596
FSD11B_Storage 3 42260
FSD11B_Storage 4 53720
FSD11B_Storage 5 58818
FSD11B_Storage 6 63678
FSD11B_Storage 7 69168
;
FSD12_Storage Storage 0 2326
FSD12_Storage 1 9156
FSD12_Storage 3 14117
FSD12_Storage 5 29614
FSD12_Storage 7 46467
FSD12_Storage 9 55697
;
FSD13_Storage Storage 0 10
FSD13_Storage 0.5 457
FSD13_Storage 1.5 7423
FSD13_Storage 2.5 20206
FSD13_Storage 3.5 28371
FSD13_Storage 4.5 33351
FSD13_Storage 5.5 37998
FSD13_Storage 6.5 41980
FSD13_Storage 7.5 43012
FSD13_Storage 8.5 50147
FSD13_Storage 9.5 54386
FSD13_Storage 10.5 58728
;
FSD14A_Storage Storage 0 20
FSD14A_Storage 1 157104
FSD14A_Storage 2 164045
FSD14A_Storage 3 171085
FSD14A_Storage 4 178224
FSD14A_Storage 5 185464
FSD14A_Storage 6 192803
FSD14A_Storage 7 200248
;
FSD14B_Storage Storage 0 0
FSD14B_Storage 1 18943
FSD14B_Storage 2 43220
FSD14B_Storage 3 46969
FSD14B_Storage 4 50873
FSD14B_Storage 5 54930
FSD14B_Storage 6 59144
FSD14B_Storage 7 63512
FSD14B_Storage 8 68024
FSD14B_Storage 9 70710
FSD14B_Storage 10 77514
;
FSD15B Storage 0 90
FSD15B 0.24 331
FSD15B 1.24 7689
FSD15B 2.24 26604
FSD15B 3.24 37234
FSD15B 4.24 43658

```

|                |         |        |
|----------------|---------|--------|
| FSD15B         | 5.24    | 47762  |
| FSD15B         | 6.24    | 51250  |
| FSD15B         | 7.24    | 54827  |
| FSD15B         | 8.24    | 58544  |
| FSD15B         | 9.24    | 62316  |
| FSD15B         | 9.99    | 65152  |
| FSD15B         | 10.24   | 66643  |
| FSD15B         | 11.24   | 70696  |
| FSD15B         | 12.24   | 74859  |
| ;              |         |        |
| FSD16A_Storage | Storage | 0 0    |
| FSD16A_Storage | 1       | 30866  |
| FSD16A_Storage | 2       | 76123  |
| FSD16A_Storage | 3       | 86494  |
| FSD16A_Storage | 4       | 91584  |
| FSD16A_Storage | 5       | 96800  |
| FSD16A_Storage | 6       | 102144 |
| FSD16A_Storage | 7       | 107616 |
| FSD16A_Storage | 8       | 113216 |
| FSD16A_Storage | 9       | 118944 |
| FSD16A_Storage | 12      | 150000 |
| ;              |         |        |
| FSD16B_Storage | Storage | 0 0    |
| FSD16B_Storage | 1       | 18943  |
| FSD16B_Storage | 2       | 43220  |
| FSD16B_Storage | 3       | 46969  |
| FSD16B_Storage | 4       | 50873  |
| FSD16B_Storage | 5       | 54930  |
| FSD16B_Storage | 6       | 59144  |
| FSD16B_Storage | 7       | 63512  |
| FSD16B_Storage | 8       | 68024  |
| FSD16B_Storage | 9       | 70710  |
| FSD16B_Storage | 10      | 77514  |
| ;              |         |        |
| FSD17B_Storage | Storage | 0 130  |
| FSD17B_Storage | 1       | 130    |
| FSD17B_Storage | 2       | 16042  |
| FSD17B_Storage | 3       | 18236  |
| FSD17B_Storage | 4       | 20559  |
| FSD17B_Storage | 5       | 23009  |
| FSD17B_Storage | 6       | 25587  |
| FSD17B_Storage | 7       | 28294  |
| FSD17B_Storage | 8       | 31128  |
| FSD17B_Storage | 9       | 34091  |
| FSD17B_Storage | 9.8     | 36553  |
| ;              |         |        |
| FSD18_Storage  | Storage | 0 130  |
| FSD18_Storage  | 1       | 130    |
| FSD18_Storage  | 2       | 21961  |
| FSD18_Storage  | 3       | 24525  |
| FSD18_Storage  | 4       | 27216  |
| FSD18_Storage  | 5       | 30035  |
| FSD18_Storage  | 6       | 32983  |
| FSD18_Storage  | 7       | 36058  |
| FSD18_Storage  | 8       | 39261  |
| FSD18_Storage  | 9       | 42593  |
| ;              |         |        |

|                |         |     |        |
|----------------|---------|-----|--------|
| FSD17A_Storage | Storage | 0   | 125    |
| FSD17A_Storage |         | 1   | 125    |
| FSD17A_Storage |         | 2   | 7048   |
| FSD17A_Storage |         | 3   | 24371  |
| FSD17A_Storage |         | 4   | 52094  |
| FSD17A_Storage |         | 5   | 80914  |
| FSD17A_Storage |         | 6   | 85809  |
| FSD17A_Storage |         | 7   | 90832  |
| FSD17A_Storage |         | 8   | 95983  |
| FSD17A_Storage |         | 9   | 101262 |
| FSD17A_Storage |         | 9.9 | 106123 |

;

|               |         |   |       |
|---------------|---------|---|-------|
| FSD20_Storage | Storage | 0 | 0     |
| FSD20_Storage |         | 1 | 9292  |
| FSD20_Storage |         | 2 | 10676 |
| FSD20_Storage |         | 3 | 12430 |
| FSD20_Storage |         | 4 | 14013 |
| FSD20_Storage |         | 5 | 15785 |
| FSD20_Storage |         | 6 | 17656 |
| FSD20_Storage |         | 7 | 19626 |
| FSD20_Storage |         | 8 | 21985 |
| FSD20_Storage |         | 9 | 24472 |

;

|               |         |   |       |
|---------------|---------|---|-------|
| FSD21_Storage | Storage | 0 | 0     |
| FSD21_Storage |         | 1 | 9292  |
| FSD21_Storage |         | 2 | 10676 |
| FSD21_Storage |         | 3 | 12430 |
| FSD21_Storage |         | 4 | 14013 |
| FSD21_Storage |         | 5 | 15785 |
| FSD21_Storage |         | 6 | 17656 |
| FSD21_Storage |         | 7 | 19626 |
| FSD21_Storage |         | 8 | 21985 |
| FSD21_Storage |         | 9 | 24472 |

;

|               |         |   |       |
|---------------|---------|---|-------|
| FSD22_Storage | Storage | 0 | 50    |
| FSD22_Storage |         | 2 | 6905  |
| FSD22_Storage |         | 4 | 12575 |
| FSD22_Storage |         | 6 | 18016 |
| FSD22_Storage |         | 8 | 26430 |

;

|               |         |   |       |
|---------------|---------|---|-------|
| FSD23_Storage | Storage | 0 | 0     |
| FSD23_Storage |         | 1 | 8576  |
| FSD23_Storage |         | 2 | 10224 |
| FSD23_Storage |         | 3 | 12000 |
| FSD23_Storage |         | 4 | 13904 |
| FSD23_Storage |         | 5 | 15936 |
| FSD23_Storage |         | 6 | 18096 |
| FSD23_Storage |         | 7 | 20384 |
| FSD23_Storage |         | 8 | 22800 |
| FSD23_Storage |         | 9 | 25304 |

;

|               |         |    |       |
|---------------|---------|----|-------|
| FSD27_Storage | Storage | 0  | 277   |
| FSD27_Storage |         | 2  | 10268 |
| FSD27_Storage |         | 4  | 30108 |
| FSD27_Storage |         | 6  | 38919 |
| FSD27_Storage |         | 8  | 45498 |
| FSD27_Storage |         | 10 | 52628 |

```
;  
FSD72_Storage Storage 0 0  
FSD72_Storage 1 9292  
FSD72_Storage 2 10676  
FSD72_Storage 3 12430  
FSD72_Storage 4 14013  
FSD72_Storage 5 15785  
FSD72_Storage 6 17656  
FSD72_Storage 7 19626  
FSD72_Storage 8 21985  
FSD72_Storage 9 24472
```

```
;  
FSDE1_Storage Storage 0 0  
FSDE1_Storage 1 21618  
FSDE1_Storage 2 24523  
FSDE1_Storage 3 27481  
FSDE1_Storage 4 30595  
FSDE1_Storage 5 33863  
FSDE1_Storage 6 37286  
FSDE1_Storage 7 40864  
FSDE1_Storage 8 44579  
FSDE1_Storage 9 48485
```

```
;  
FSDE2_Storage Storage 0 0  
FSDE2_Storage 1 21618  
FSDE2_Storage 2 24523  
FSDE2_Storage 3 27481  
FSDE2_Storage 4 30595  
FSDE2_Storage 5 33863  
FSDE2_Storage 6 37286  
FSDE2_Storage 7 40864  
FSDE2_Storage 8 44579  
FSDE2_Storage 9 48485
```

```
;  
FSDE3_Storage Storage 0 0  
FSDE3_Storage 1 30866  
FSDE3_Storage 2 76123  
FSDE3_Storage 3 86496  
FSDE3_Storage 4 91584  
FSDE3_Storage 5 96800  
FSDE3_Storage 6 102144  
FSDE3_Storage 7 107616  
FSDE3_Storage 8 113216  
FSDE3_Storage 9 118944
```

```
;  
FSDE4_Storage Storage 0 0  
FSDE4_Storage 1 18943  
FSDE4_Storage 2 43220  
FSDE4_Storage 3 46969  
FSDE4_Storage 4 50873  
FSDE4_Storage 5 54930  
FSDE4_Storage 6 59144  
FSDE4_Storage 7 63512  
FSDE4_Storage 8 68024  
FSDE4_Storage 9 70710  
FSDE4_Storage 10 77514  
;
```

```

FSDE5_Storage Storage 0 0
FSDE5_Storage 1 20604
FSDE5_Storage 2 23100
FSDE5_Storage 3 25724
FSDE5_Storage 4 28476
FSDE5_Storage 5 31356
FSDE5_Storage 6 34364
FSDE5_Storage 7 37500
FSDE5_Storage 8 40764
FSDE5_Storage 9 44156
;
FSDE6_Storage Storage 0 0
FSDE6_Storage 1 35000
FSDE6_Storage 2 11000
FSDE6_Storage 3 166000
FSDE6_Storage 4 175000
FSDE6_Storage 5 180000
FSDE6_Storage 6 190000
FSDE6_Storage 7 195000
FSDE6_Storage 8 205000
FSDE6_Storage 9 210000
;
PNDE7_Storage Storage 0 0
PNDE7_Storage 1 35000
PNDE7_Storage 2 110000
PNDE7_Storage 3 165500
PNDE7_Storage 4 176000
PNDE7_Storage 5 179100
PNDE7_Storage 6 191000
PNDE7_Storage 7 285000
PNDE7_Storage 8 310000
PNDE7_Storage 9 325000
;
PNDW3_Storage Storage 0 0
PNDW3_Storage 1 9992
PNDW3_Storage 2 59043
PNDW3_Storage 3 205185
PNDW3_Storage 4 264198
PNDW3_Storage 5 285521
PNDW3_Storage 6 295282
PNDW3_Storage 7 304495
PNDW3_Storage 8 314697
PNDW3_Storage 9 324413
PNDW3_Storage 10 341308
PNDW3_Storage 11 350000
;
EX_STOCKPOND Storage 0 0
EX_STOCKPOND 2 53785
EX_STOCKPOND 4 124292
EX_STOCKPOND 6 158179
EX_STOCKPOND 8 197284
EX_STOCKPOND 12 215000
;
FSD12A_Storage Storage 0 0
FSD12A_Storage 0.33 40
FSD12A_Storage 0.83 100
FSD12A_Storage 1.83 4187

```

|                        |      |          |
|------------------------|------|----------|
| FSD12A_Storage         | 3.83 | 8006     |
| FSD12A_Storage         | 5.83 | 11106    |
| FSD12A_Storage         | 7.83 | 14529    |
| FSD12A_Storage         | 9.83 | 18087    |
| ;                      |      |          |
| EX_STOCKPOND_2 Storage | 0    | 42900.00 |
| EX_STOCKPOND_2         | 1    | 46208.00 |
| EX_STOCKPOND_2         | 2    | 49635.00 |
| EX_STOCKPOND_2         | 3    | 53177.00 |
| EX_STOCKPOND_2         | 4    | 56840.00 |
| EX_STOCKPOND_2         | 5    | 60624.00 |
| EX_STOCKPOND_2         | 6    | 64531.00 |
| EX_STOCKPOND_2         | 7    | 87989.00 |

[REPORT]

```

;;Reporting Options
INPUT NO
CONTROLS NO
SUBCATCHMENTS ALL
NODES ALL
LINKS ALL

```

[TAGS]

[MAP]

```

DIMENSIONS 0.000 0.000 10000.000 10000.000
Units None

```

[COORDINATES]

```

;;Node      X-Coord      Y-Coord
;;-----
79          5884.515     4712.131
80          5817.704     5171.853
81          5073.229     3732.644
DP-1E       6547.197     4663.182
DP-21       5158.237     2461.303
DP-22       5459.717     3182.701
DP-25       5742.688     5221.372
DP-26       4124.592     3258.071
DP-2E       6775.999     3411.503
DP-3E       6797.533     2948.516
DP-4E       6714.169     2510.093
DP-53A      3642.762     501.684
DP-56       6504.129     1896.028
DP-60A      3963.085     867.767
DP-61       4084.215     1511.103
DP-63       4412.613     1939.097
DP-64       3794.068     2142.966
DP-68       4356.369     2316.580
DP-69       4942.894     3508.407
DP-70       5226.979     3993.237
DP-71       5442.103     4272.974
DP-72       5451.641     4665.874
DP-73       5492.018     4961.970
DP-74       4727.551     6865.062
DP-75       5365.504     6237.876
DP-77       5475.867     5618.766

```

|               |          |          |
|---------------|----------|----------|
| DP-78         | 5921.485 | 6716.523 |
| DP-8          | 6434.142 | 1478.802 |
| DP-87         | 4444.914 | 2983.509 |
| FSD9_OUTLET   | 3238.995 | 2256.727 |
| FSDE1_Outlet  | 6434.271 | 4669.016 |
| FSDE2_Outlet  | 6611.596 | 3515.305 |
| FSDE4_Outlet  | 6354.741 | 2689.617 |
| PNDW3_Outfall | 4371.627 | 2108.472 |
| SC3-10        | 4194.578 | 1691.453 |
| SC3-11A       | 4229.398 | 2117.054 |
| SC3-11B       | 4810.997 | 2130.213 |
| SC3-12        | 4428.057 | 3368.053 |
| SC3-12A       | 4611.234 | 3386.371 |
| SC3-13        | 4205.345 | 2690.104 |
| SC3-14A       | 4939.468 | 2687.948 |
| SC3-14B       | 5570.080 | 2881.221 |
| SC3-15A       | 3957.994 | 3935.659 |
| SC3-15B       | 4253.797 | 3492.256 |
| SC3-16A       | 5610.874 | 3769.538 |
| SC3-16B       | 5946.930 | 3710.291 |
| SC3-17A       | 4897.039 | 4383.078 |
| SC3-17B       | 5029.641 | 4689.536 |
| SC3-18        | 4661.171 | 3672.264 |
| SC3-18B       | 5224.373 | 3688.343 |
| SC3-19        | 4700.634 | 5468.026 |
| SC3-1A        | 3683.139 | 1002.356 |
| SC3-20        | 5233.607 | 5508.402 |
| SC3-21        | 6057.293 | 5486.868 |
| SC3-22        | 5053.257 | 4878.525 |
| SC3-23        | 6014.224 | 4991.580 |
| SC3-24A       | 5574.257 | 5135.860 |
| SC3-24B       | 5238.990 | 5048.107 |
| SC3-25        | 5766.580 | 5548.779 |
| SC3-26        | 5493.928 | 4529.508 |
| SC3-27        | 5680.443 | 4700.867 |
| SC3-5A        | 3887.715 | 1250.000 |
| SC3-5B        | 4269.948 | 1325.370 |
| SC3-61        | 4689.866 | 1301.144 |
| SC3-6A        | 3599.724 | 2036.725 |
| SC3-6B        | 3911.941 | 2278.262 |
| SC3-6C        | 3931.404 | 1899.389 |
| SC3-7         | 3866.181 | 2719.714 |
| SC3-72        | 6243.026 | 5882.560 |
| SC3-73        | 4660.257 | 6517.821 |
| SC3-74        | 4487.983 | 7134.240 |
| SC3-75        | 5230.915 | 6770.849 |
| SC3-76        | 5642.758 | 7201.535 |
| SC3-77        | 6251.101 | 6280.944 |
| SC3-78        | 6185.792 | 7157.036 |
| SC3-79        | 6385.690 | 8189.419 |
| SC3-8         | 3648.146 | 4254.031 |
| SC3-80        | 5591.614 | 8184.036 |
| SC3-81        | 5125.935 | 8278.248 |
| SC3-82        | 4579.503 | 7912.166 |
| SC3-88        | 4902.517 | 6095.211 |
| SC3-89        | 4886.367 | 5834.108 |
| SC3-9         | 3303.598 | 3543.400 |



|                 |          |          |
|-----------------|----------|----------|
| SCE-1           | 6399.149 | 5529.937 |
| SCE-10          | 6035.758 | 2498.988 |
| SCE-11          | 6797.533 | 2267.494 |
| SCE-13          | 6727.547 | 5155.779 |
| SCE-14          | 6773.307 | 4520.518 |
| SCE-15          | 6197.784 | 1540.228 |
| SCE-2           | 6541.814 | 5005.039 |
| SCE-3           | 6329.163 | 3944.476 |
| SCE-4           | 7030.774 | 3734.824 |
| SCE-5           | 6151.505 | 3309.215 |
| SCE-6           | 6725.692 | 3121.900 |
| SCE-7           | 6024.991 | 2935.057 |
| SCE-8           | 6533.739 | 2768.166 |
| SCE-9           | 6893.358 | 2668.804 |
| SC3-12B         | 4853.505 | 3268.196 |
| SC3-13A         | 4531.145 | 2580.495 |
| SC3_OUTFALL     | 3610.089 | 362.777  |
| SCE_OUTFALL     | 6437.143 | 1321.540 |
| FSD05           | 3903.865 | 964.671  |
| FSD06           | 3926.222 | 1751.687 |
| FSD09           | 3166.317 | 2329.405 |
| FSD1            | 3551.242 | 727.794  |
| FSD11B          | 4590.270 | 1990.241 |
| FSD12           | 4403.012 | 3117.276 |
| FSD13           | 4205.345 | 2437.077 |
| FSD14A          | 4577.197 | 2451.551 |
| FSD14B          | 5333.203 | 2531.289 |
| FSD15B          | 4181.119 | 3398.044 |
| FSD16A          | 5397.806 | 3311.907 |
| FSD16B          | 5631.991 | 3249.996 |
| FSD17A          | 4947.134 | 4200.382 |
| FSD17B          | 5126.883 | 4489.159 |
| FSD18           | 4743.086 | 3557.071 |
| FSD20           | 5286.628 | 5319.839 |
| FSD21           | 5965.772 | 5260.758 |
| FSD22           | 5271.292 | 4776.237 |
| FSD23           | 5938.854 | 4787.004 |
| FSD27           | 5586.231 | 4302.483 |
| FSD72           | 5683.135 | 5683.368 |
| FSDE1           | 6401.841 | 4671.258 |
| FSDE2           | 6587.574 | 3529.941 |
| FSDE3           | 6652.177 | 3034.653 |
| FSDE4           | 6269.944 | 2711.639 |
| FSDE5           | 6692.554 | 2679.337 |
| PNDE7           | 6555.273 | 2081.761 |
| FSDE6           | 6342.622 | 2130.213 |
| PNDW3           | 4348.595 | 2207.747 |
| EX_STOCK_POND_1 | 4407.171 | 2730.935 |
| FSD12A          | 4556.281 | 3198.614 |
| EX_STOCK_POND_2 | 5130.815 | 3839.177 |

[VERTICES]

| ::Link                  | X-Coord  | Y-Coord  |
|-------------------------|----------|----------|
| ::-----                 |          |          |
| EX_STOCK_POND_1_OUTFALL | 4395.690 | 2640.525 |
| EX_STOCK_POND_1_OUTFALL | 4394.255 | 2640.525 |

Sterling Ranch 2022 MDDP Amendment

2-YR Type II Storm

**NOTE:** These warnings are generated from using 1 foot dummy conduits between basin nodes and detention ponds to ensure there is no additional travel time between the bottom of the basin and the detention pond, except where conveyed by a channel.

WARNING 04: minimum elevation drop used for Conduit 1  
WARNING 04: minimum elevation drop used for Conduit 2  
WARNING 04: minimum elevation drop used for Conduit 3  
WARNING 04: minimum elevation drop used for Conduit 4  
WARNING 04: minimum elevation drop used for Conduit 5  
WARNING 04: minimum elevation drop used for Conduit 6  
WARNING 04: minimum elevation drop used for Conduit 7  
WARNING 04: minimum elevation drop used for Conduit 8  
WARNING 04: minimum elevation drop used for Conduit 9  
WARNING 04: minimum elevation drop used for Conduit 10  
WARNING 04: minimum elevation drop used for Conduit 11  
WARNING 04: minimum elevation drop used for Conduit 12  
WARNING 04: minimum elevation drop used for Conduit 14  
WARNING 04: minimum elevation drop used for Conduit 15  
WARNING 04: minimum elevation drop used for Conduit 16  
WARNING 04: minimum elevation drop used for Conduit 17  
WARNING 04: minimum elevation drop used for Conduit 18  
WARNING 04: minimum elevation drop used for Conduit 20  
WARNING 04: minimum elevation drop used for Conduit 22  
WARNING 04: minimum elevation drop used for Conduit 27  
WARNING 04: minimum elevation drop used for Conduit 28  
WARNING 04: minimum elevation drop used for Conduit 29  
WARNING 04: minimum elevation drop used for Conduit 30  
WARNING 04: minimum elevation drop used for Conduit 34  
WARNING 04: minimum elevation drop used for Conduit 36  
WARNING 04: minimum elevation drop used for Conduit 37  
WARNING 04: minimum elevation drop used for Conduit 38  
WARNING 04: minimum elevation drop used for Conduit 39  
WARNING 04: minimum elevation drop used for Conduit 40  
WARNING 04: minimum elevation drop used for Conduit 44  
WARNING 04: minimum elevation drop used for Conduit 45  
WARNING 04: minimum elevation drop used for Conduit 46  
WARNING 04: minimum elevation drop used for Conduit 47  
WARNING 04: minimum elevation drop used for Conduit 48  
WARNING 04: minimum elevation drop used for Conduit 51  
WARNING 04: minimum elevation drop used for Conduit 54  
WARNING 08: elevation drop exceeds length for Conduit 56  
WARNING 04: minimum elevation drop used for Conduit 63  
WARNING 04: minimum elevation drop used for Conduit 65  
WARNING 04: minimum elevation drop used for Conduit 67  
WARNING 04: minimum elevation drop used for Conduit 69  
WARNING 04: minimum elevation drop used for Conduit 70  
WARNING 04: minimum elevation drop used for Conduit 71  
WARNING 04: minimum elevation drop used for Conduit 74  
WARNING 04: minimum elevation drop used for Conduit 75  
WARNING 08: elevation drop exceeds length for Conduit 77  
WARNING 04: minimum elevation drop used for Conduit 78  
WARNING 04: minimum elevation drop used for Conduit 79  
WARNING 04: minimum elevation drop used for Conduit 82

WARNING 04: minimum elevation drop used for Conduit 83  
 WARNING 04: minimum elevation drop used for Conduit 85  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12\_Outlet  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12A\_Outlet

\*\*\*\*\*  
 NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.  
 \*\*\*\*\*

\*\*\*\*\*  
 Analysis Options  
 \*\*\*\*\*

Flow Units ..... CFS  
 Process Models:  
 Rainfall/Runoff ..... NO  
 RDII ..... NO  
 Snowmelt ..... NO  
 Groundwater ..... NO  
 Flow Routing ..... YES  
 Ponding Allowed ..... NO  
 Water Quality ..... NO  
 Flow Routing Method ..... KINWAVE  
 Starting Date ..... 01/01/2005 00:00:00  
 Ending Date ..... 01/04/2005 06:00:00  
 Antecedent Dry Days ..... 0.0  
 Report Time Step ..... 00:05:00  
 Routing Time Step ..... 30.00 sec

|                             | Volume    | Volume              |
|-----------------------------|-----------|---------------------|
| Flow Routing Continuity     | acre-feet | 10 <sup>6</sup> gal |
| *****                       | -----     | -----               |
| Dry Weather Inflow .....    | 0.000     | 0.000               |
| Wet Weather Inflow .....    | 0.000     | 0.000               |
| Groundwater Inflow .....    | 0.000     | 0.000               |
| RDII Inflow .....           | 0.000     | 0.000               |
| External Inflow .....       | 163.823   | 53.384              |
| External Outflow .....      | 88.713    | 28.909              |
| Flooding Loss .....         | 32.252    | 10.510              |
| Evaporation Loss .....      | 0.000     | 0.000               |
| Exfiltration Loss .....     | 0.000     | 0.000               |
| Initial Stored Volume ..... | 0.000     | 0.000               |
| Final Stored Volume .....   | 42.982    | 14.006              |
| Continuity Error (%) .....  | -0.076    |                     |

\*\*\*\*\*  
 Highest Flow Instability Indexes  
 \*\*\*\*\*

Link PNDW3\_Outlet (65)  
 Link RT-14 (65)  
 Link RT-18 (65)  
 Link RT-20 (63)  
 Link 67 (63)

\*\*\*\*\*

Routing Time Step Summary

\*\*\*\*\*

Minimum Time Step : 30.00 sec
Average Time Step : 30.00 sec
Maximum Time Step : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging : 0.00

\*\*\*\*\*

Node Depth Summary

\*\*\*\*\*

Table with columns: Node, Type, Average Depth, Maximum Depth, Maximum HGL, Time of Occurrence, Max Reported Max Depth. Rows include nodes 79 through SC3-11A.

|         |          |      |      |        |         |      |
|---------|----------|------|------|--------|---------|------|
| SC3-11B | JUNCTION | 0.00 | 0.00 | 98.20  | 0 00:00 | 0.00 |
| SC3-12  | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-12A | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-13  | JUNCTION | 0.00 | 0.00 | 118.60 | 0 00:00 | 0.00 |
| SC3-14A | JUNCTION | 0.00 | 0.00 | 118.50 | 0 00:00 | 0.00 |
| SC3-14B | JUNCTION | 0.00 | 0.00 | 184.20 | 0 00:00 | 0.00 |
| SC3-15A | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-15B | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-16A | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-16B | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-17A | JUNCTION | 0.00 | 0.00 | 230.20 | 0 00:00 | 0.00 |
| SC3-17B | JUNCTION | 0.00 | 0.00 | 258.20 | 0 00:00 | 0.00 |
| SC3-18  | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-18B | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-19  | JUNCTION | 0.05 | 1.81 | 247.01 | 0 12:25 | 1.80 |
| SC3-1A  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-20  | JUNCTION | 0.00 | 0.00 | 324.20 | 0 00:00 | 0.00 |
| SC3-21  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-22  | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-23  | JUNCTION | 0.00 | 0.00 | 295.20 | 0 00:00 | 0.00 |
| SC3-24A | JUNCTION | 0.00 | 0.00 | 300.20 | 0 00:00 | 0.00 |
| SC3-24B | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-25  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-26  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-27  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-5A  | JUNCTION | 0.00 | 0.00 | 22.20  | 0 00:00 | 0.00 |
| SC3-5B  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-61  | JUNCTION | 0.03 | 0.56 | 28.76  | 0 12:20 | 0.56 |
| SC3-6A  | JUNCTION | 0.08 | 1.60 | 88.80  | 0 12:15 | 1.59 |
| SC3-6B  | JUNCTION | 0.00 | 0.00 | 93.20  | 0 00:00 | 0.00 |
| SC3-6C  | JUNCTION | 0.00 | 0.00 | 63.20  | 0 00:00 | 0.00 |
| SC3-7   | JUNCTION | 0.07 | 1.39 | 118.59 | 0 12:15 | 1.38 |
| SC3-72  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-73  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-74  | JUNCTION | 0.00 | 0.00 | 497.20 | 0 00:00 | 0.00 |
| SC3-75  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-76  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-77  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-78  | JUNCTION | 0.00 | 0.00 | 462.20 | 0 00:00 | 0.00 |
| SC3-79  | JUNCTION | 0.02 | 0.74 | 562.94 | 0 12:25 | 0.73 |
| SC3-8   | JUNCTION | 0.01 | 0.61 | 247.81 | 0 12:25 | 0.61 |
| SC3-80  | JUNCTION | 0.02 | 0.65 | 552.85 | 0 12:25 | 0.65 |
| SC3-81  | JUNCTION | 0.02 | 0.72 | 532.92 | 0 12:30 | 0.71 |
| SC3-82  | JUNCTION | 0.01 | 0.57 | 562.77 | 0 12:25 | 0.56 |
| SC3-88  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-89  | JUNCTION | 0.01 | 0.29 | 375.49 | 0 12:20 | 0.29 |
| SC3-9   | JUNCTION | 0.00 | 0.00 | 139.20 | 0 00:00 | 0.00 |
| SCE-1   | JUNCTION | 0.00 | 0.00 | 266.00 | 0 00:00 | 0.00 |
| SCE-10  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-11  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-13  | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-14  | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-15  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SCE-2   | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-3   | JUNCTION | 0.00 | 0.00 | 230.00 | 0 00:00 | 0.00 |
| SCE-4   | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-5   | JUNCTION | 0.00 | 0.00 | 128.90 | 0 00:00 | 0.00 |

|                 |          |      |      |        |   |       |      |
|-----------------|----------|------|------|--------|---|-------|------|
| SCE-6           | JUNCTION | 0.00 | 0.00 | 128.90 | 0 | 00:00 | 0.00 |
| SCE-7           | JUNCTION | 0.00 | 0.00 | 98.00  | 0 | 00:00 | 0.00 |
| SCE-8           | JUNCTION | 0.00 | 0.00 | 60.50  | 0 | 00:00 | 0.00 |
| SCE-9           | JUNCTION | 0.00 | 0.00 | 60.50  | 0 | 00:00 | 0.00 |
| SC3-12B         | JUNCTION | 0.00 | 0.00 | 157.20 | 0 | 00:00 | 0.00 |
| SC3-13A         | JUNCTION | 0.00 | 0.00 | 118.60 | 0 | 00:00 | 0.00 |
| SC3_OUTFALL     | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| SCE_OUTFALL     | OUTFALL  | 0.96 | 1.00 | 1.00   | 0 | 03:23 | 1.00 |
| FSD05           | STORAGE  | 2.76 | 4.28 | 26.48  | 0 | 13:04 | 4.28 |
| FSD06           | STORAGE  | 4.85 | 7.11 | 70.31  | 0 | 16:59 | 7.11 |
| FSD09           | STORAGE  | 1.94 | 4.38 | 143.58 | 0 | 15:01 | 4.38 |
| FSD1            | STORAGE  | 1.45 | 1.86 | 1.86   | 1 | 00:07 | 1.86 |
| FSD11B          | STORAGE  | 2.88 | 4.82 | 103.02 | 0 | 12:25 | 4.82 |
| FSD12           | STORAGE  | 4.21 | 5.47 | 162.47 | 0 | 12:28 | 5.47 |
| FSD13           | STORAGE  | 3.10 | 5.45 | 123.95 | 0 | 12:40 | 5.45 |
| FSD14A          | STORAGE  | 1.57 | 3.07 | 121.47 | 0 | 15:34 | 3.07 |
| FSD14B          | STORAGE  | 3.34 | 4.76 | 188.96 | 0 | 12:42 | 4.76 |
| FSD15B          | STORAGE  | 1.49 | 3.69 | 202.89 | 0 | 15:16 | 3.69 |
| FSD16A          | STORAGE  | 4.10 | 6.39 | 230.59 | 0 | 12:41 | 6.39 |
| FSD16B          | STORAGE  | 4.29 | 5.60 | 229.80 | 0 | 17:05 | 5.60 |
| FSD17A          | STORAGE  | 2.83 | 4.18 | 234.38 | 0 | 14:19 | 4.18 |
| FSD17B          | STORAGE  | 2.27 | 5.11 | 263.31 | 0 | 12:40 | 5.11 |
| FSD18           | STORAGE  | 2.56 | 4.30 | 207.50 | 0 | 14:18 | 4.30 |
| FSD20           | STORAGE  | 0.02 | 0.61 | 324.81 | 0 | 12:23 | 0.60 |
| FSD21           | STORAGE  | 0.64 | 2.35 | 334.55 | 0 | 13:28 | 2.35 |
| FSD22           | STORAGE  | 1.42 | 3.31 | 286.51 | 0 | 13:45 | 3.31 |
| FSD23           | STORAGE  | 0.69 | 2.21 | 298.21 | 0 | 12:44 | 2.21 |
| FSD27           | STORAGE  | 3.09 | 5.27 | 262.47 | 0 | 15:19 | 5.27 |
| FSD72           | STORAGE  | 0.88 | 3.25 | 343.45 | 0 | 14:31 | 3.25 |
| FSDE1           | STORAGE  | 1.57 | 2.62 | 268.62 | 0 | 15:50 | 2.62 |
| FSDE2           | STORAGE  | 0.33 | 2.31 | 232.31 | 0 | 14:53 | 2.31 |
| FSDE3           | STORAGE  | 2.58 | 4.75 | 133.65 | 0 | 14:35 | 4.75 |
| FSDE4           | STORAGE  | 2.06 | 3.31 | 101.31 | 0 | 14:53 | 3.31 |
| FSDE5           | STORAGE  | 2.56 | 5.10 | 65.60  | 0 | 16:46 | 5.10 |
| PNDE7           | STORAGE  | 0.36 | 1.46 | 33.96  | 0 | 13:31 | 1.46 |
| FSDE6           | STORAGE  | 2.67 | 4.16 | 36.66  | 0 | 14:38 | 4.16 |
| PNDW3           | STORAGE  | 0.08 | 0.88 | 119.18 | 0 | 12:44 | 0.87 |
| EX_STOCK_POND_1 | STORAGE  | 6.63 | 8.12 | 150.12 | 0 | 16:36 | 8.12 |
| FSD12A          | STORAGE  | 4.13 | 6.07 | 163.07 | 0 | 14:11 | 6.07 |
| EX_STOCK_POND_2 | STORAGE  | 3.17 | 4.36 | 233.46 | 0 | 13:25 | 4.36 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum        |              | Lateral | Total  | Flow     |                        |            |
|-------|----------|----------------|--------------|---------|--------|----------|------------------------|------------|
|       |          | Lateral Inflow | Total Inflow |         |        |          | Time of Max Occurrence | Max Inflow |
|       |          | CFS            | CFS          | days    | hr:min | 10^6 gal | 10^6 gal               | Percent    |
| 79    | JUNCTION | 0.00           | 4.77         | 0       | 12:44  | 0        | 0.236                  | -0.000     |
| 80    | JUNCTION | 0.00           | 0.30         | 0       | 13:28  | 0        | 0.17                   | 0.000      |
| 81    | JUNCTION | 0.00           | 150.48       | 0       | 13:25  | 0        | 8.13                   | 0.000      |
| DP-1E | JUNCTION | 0.00           | 12.41        | 0       | 12:25  | 0        | 0.808                  | 0.000      |
| DP-21 | JUNCTION | 0.00           | 84.32        | 0       | 12:43  | 0        | 6.67                   | 0.000      |

|               |          |        |        |   |       |        |        |           |
|---------------|----------|--------|--------|---|-------|--------|--------|-----------|
| DP-22         | JUNCTION | 0.00   | 65.06  | 0 | 12:41 | 0      | 5.24   | 0.000     |
| DP-25         | JUNCTION | 0.00   | 5.58   | 0 | 12:15 | 0      | 0.1    | 0.000     |
| DP-26         | JUNCTION | 0.00   | 0.74   | 0 | 15:16 | 0      | 0.656  | 0.000     |
| DP-2E         | JUNCTION | 0.00   | 25.00  | 0 | 12:30 | 0      | 2.02   | 0.000     |
| DP-3E         | JUNCTION | 0.00   | 28.00  | 0 | 12:38 | 0      | 5.01   | 0.000     |
| DP-4E         | JUNCTION | 0.00   | 29.80  | 0 | 12:39 | 0      | 7.06   | 0.000     |
| DP-53A        | JUNCTION | 0.00   | 150.20 | 0 | 12:53 | 0      | 28.8   | 0.000     |
| DP-56         | JUNCTION | 0.00   | 25.44  | 0 | 13:31 | 0      | 10.3   | 0.000     |
| DP-60A        | JUNCTION | 0.00   | 150.16 | 0 | 12:52 | 0      | 28.6   | 0.000     |
| DP-61         | JUNCTION | 0.00   | 140.26 | 0 | 12:42 | 0      | 25.8   | 0.000     |
| DP-63         | JUNCTION | 0.00   | 136.83 | 0 | 12:34 | 0      | 19.5   | 0.000     |
| DP-64         | JUNCTION | 0.00   | 91.34  | 0 | 12:16 | 0      | 2.47   | 0.000     |
| DP-68         | JUNCTION | 0.00   | 101.57 | 0 | 12:43 | 0      | 17.3   | 0.000     |
| DP-69         | JUNCTION | 0.00   | 158.17 | 0 | 13:30 | 0      | 9.62   | 0.000     |
| DP-70         | JUNCTION | 0.00   | 155.07 | 0 | 13:17 | 0      | 9.53   | 0.000     |
| DP-71         | JUNCTION | 0.00   | 154.76 | 0 | 13:13 | 0      | 8.84   | 0.000     |
| DP-72         | JUNCTION | 0.00   | 148.04 | 0 | 13:09 | 0      | 6.94   | 0.000     |
| DP-73         | JUNCTION | 0.00   | 147.29 | 0 | 13:07 | 0      | 6.72   | 0.000     |
| DP-74         | JUNCTION | 0.00   | 33.68  | 0 | 12:32 | 0      | 0.987  | 0.000     |
| DP-75         | JUNCTION | 0.00   | 95.13  | 0 | 12:45 | 0      | 3.6    | 0.000     |
| DP-77         | JUNCTION | 0.00   | 144.08 | 0 | 12:58 | 0      | 6.14   | 0.000     |
| DP-78         | JUNCTION | 0.00   | 52.82  | 0 | 12:33 | 0      | 1.6    | 0.000     |
| DP-8          | JUNCTION | 0.00   | 27.54  | 0 | 13:22 | 0      | 10.7   | 0.002     |
| DP-87         | JUNCTION | 0.00   | 151.73 | 0 | 13:44 | 0      | 11.7   | 0.000     |
| FSD9_OUTLET   | JUNCTION | 0.00   | 1.35   | 0 | 15:01 | 0      | 1.25   | 0.000     |
| FSDE1_Outlet  | JUNCTION | 0.00   | 0.26   | 0 | 15:50 | 0      | 0.326  | 0.000     |
| FSDE2_Outlet  | JUNCTION | 0.00   | 2.01   | 0 | 14:53 | 0      | 0.608  | 0.000     |
| FSDE4_Outlet  | JUNCTION | 0.00   | 1.15   | 0 | 14:53 | 0      | 0.907  | 0.000     |
| PNDW3_Outfall | JUNCTION | 0.00   | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| SC3-10        | JUNCTION | 2.94   | 2.94   | 0 | 12:20 | 0.0737 | 0.0737 | 0.000     |
| SC3-11A       | JUNCTION | 1.99   | 1.99   | 0 | 12:15 | 0.0283 | 0.0283 | 0.000     |
| SC3-11B       | JUNCTION | 79.84  | 79.84  | 0 | 12:15 | 2.48   | 2.48   | 0.000     |
| SC3-12        | JUNCTION | 47.61  | 47.61  | 0 | 12:15 | 1.53   | 1.53   | 0.000     |
| SC3-12A       | JUNCTION | 15.01  | 15.01  | 0 | 12:15 | 0.362  | 0.362  | 0.000     |
| SC3-13        | JUNCTION | 56.24  | 56.24  | 0 | 12:15 | 1.33   | 1.33   | 0.000     |
| SC3-14A       | JUNCTION | 137.91 | 137.91 | 0 | 12:15 | 4.26   | 4.26   | 0.000     |
| SC3-14B       | JUNCTION | 77.46  | 77.46  | 0 | 12:15 | 2.14   | 2.14   | 0.000     |
| SC3-15A       | JUNCTION | 13.21  | 13.21  | 0 | 12:30 | 0.422  | 0.422  | 0.000     |
| SC3-15B       | JUNCTION | 8.38   | 8.38   | 0 | 12:15 | 0.234  | 0.234  | 0.000     |
| SC3-16A       | JUNCTION | 206.37 | 206.37 | 0 | 12:15 | 6.13   | 6.13   | 0.000     |
| SC3-16B       | JUNCTION | 60.38  | 60.38  | 0 | 12:15 | 1.93   | 1.93   | 0.000     |
| SC3-17A       | JUNCTION | 27.45  | 27.45  | 0 | 12:15 | 0.707  | 0.707  | 0.000     |
| SC3-17B       | JUNCTION | 34.53  | 34.53  | 0 | 12:15 | 0.927  | 0.927  | 0.000     |
| SC3-18        | JUNCTION | 22.75  | 22.75  | 0 | 12:15 | 0.721  | 0.721  | 0.000     |
| SC3-18B       | JUNCTION | 1.53   | 1.53   | 0 | 12:25 | 0.0635 | 0.0635 | 0.000     |
| SC3-19        | JUNCTION | 28.00  | 28.00  | 0 | 12:25 | 0.707  | 0.707  | 0.000     |
| SC3-1A        | JUNCTION | 15.40  | 15.40  | 0 | 12:15 | 0.35   | 0.35   | 0.000     |
| SC3-20        | JUNCTION | 9.29   | 9.29   | 0 | 12:20 | 0.215  | 0.215  | 0.000     |
| SC3-21        | JUNCTION | 9.77   | 9.77   | 0 | 12:15 | 0.17   | 0.17   | 0.000     |
| SC3-22        | JUNCTION | 7.15   | 7.15   | 0 | 12:20 | 0.167  | 0.167  | 0.000     |
| SC3-23        | JUNCTION | 10.92  | 10.92  | 0 | 12:15 | 0.237  | 0.237  | 0.000     |
| SC3-24A       | JUNCTION | 6.43   | 6.43   | 0 | 12:20 | 0.185  | 0.185  | 0.000     |
| SC3-24B       | JUNCTION | 1.95   | 1.95   | 0 | 12:15 | 0.0514 | 0.0514 | 0.000     |
| SC3-25        | JUNCTION | 5.58   | 5.58   | 0 | 12:15 | 0.1    | 0.1    | 0.000     |
| SC3-26        | JUNCTION | 1.66   | 1.66   | 0 | 12:20 | 0.051  | 0.051  | 0.000     |
| SC3-27        | JUNCTION | 14.49  | 14.49  | 0 | 12:20 | 0.628  | 0.628  | 0.000     |
| SC3-5A        | JUNCTION | 48.38  | 48.38  | 0 | 12:15 | 1.13   | 1.13   | 0.000     |

|             |          |        |        |   |       |        |        |        |
|-------------|----------|--------|--------|---|-------|--------|--------|--------|
| SC3-5B      | JUNCTION | 60.26  | 60.26  | 0 | 12:15 | 1.62   | 1.62   | 0.000  |
| SC3-61      | JUNCTION | 5.61   | 5.61   | 0 | 12:20 | 0.177  | 0.177  | 0.000  |
| SC3-6A      | JUNCTION | 59.98  | 59.98  | 0 | 12:15 | 1.71   | 1.71   | 0.000  |
| SC3-6B      | JUNCTION | 31.63  | 31.63  | 0 | 12:15 | 0.853  | 0.853  | 0.000  |
| SC3-6C      | JUNCTION | 52.26  | 52.26  | 0 | 12:15 | 1.33   | 1.33   | 0.000  |
| SC3-7       | JUNCTION | 60.94  | 60.94  | 0 | 12:15 | 1.62   | 1.62   | 0.000  |
| SC3-72      | JUNCTION | 9.55   | 9.55   | 0 | 12:20 | 0.256  | 0.256  | 0.000  |
| SC3-73      | JUNCTION | 12.16  | 12.16  | 0 | 12:25 | 0.337  | 0.337  | 0.000  |
| SC3-74      | JUNCTION | 22.51  | 22.51  | 0 | 12:25 | 0.616  | 0.616  | 0.000  |
| SC3-75      | JUNCTION | 11.12  | 11.12  | 0 | 12:25 | 0.408  | 0.408  | 0.000  |
| SC3-76      | JUNCTION | 10.85  | 10.85  | 0 | 12:25 | 0.393  | 0.393  | 0.000  |
| SC3-77      | JUNCTION | 8.93   | 8.93   | 0 | 12:30 | 0.327  | 0.327  | 0.000  |
| SC3-78      | JUNCTION | 32.29  | 32.29  | 0 | 12:20 | 0.8    | 0.8    | 0.000  |
| SC3-79      | JUNCTION | 32.26  | 32.26  | 0 | 12:25 | 0.807  | 0.807  | 0.000  |
| SC3-8       | JUNCTION | 12.18  | 12.18  | 0 | 12:25 | 0.246  | 0.246  | 0.000  |
| SC3-80      | JUNCTION | 22.36  | 22.36  | 0 | 12:25 | 0.631  | 0.631  | 0.000  |
| SC3-81      | JUNCTION | 26.67  | 26.67  | 0 | 12:30 | 0.804  | 0.804  | -0.000 |
| SC3-82      | JUNCTION | 17.01  | 17.01  | 0 | 12:25 | 0.36   | 0.36   | 0.000  |
| SC3-88      | JUNCTION | 6.28   | 6.28   | 0 | 12:25 | 0.184  | 0.184  | 0.000  |
| SC3-89      | JUNCTION | 2.86   | 2.86   | 0 | 12:20 | 0.0711 | 0.0711 | 0.000  |
| SC3-9       | JUNCTION | 24.66  | 24.66  | 0 | 12:25 | 0.985  | 0.985  | 0.000  |
| SCE-1       | JUNCTION | 9.82   | 9.82   | 0 | 12:25 | 0.42   | 0.42   | 0.000  |
| SCE-10      | JUNCTION | 107.37 | 107.37 | 0 | 12:15 | 3.41   | 3.41   | 0.000  |
| SCE-11      | JUNCTION | 0.77   | 0.77   | 0 | 12:15 | 0.0138 | 0.0138 | 0.000  |
| SCE-13      | JUNCTION | 10.90  | 10.90  | 0 | 12:25 | 0.404  | 0.404  | 0.000  |
| SCE-14      | JUNCTION | 8.00   | 8.00   | 0 | 12:20 | 0.27   | 0.27   | 0.000  |
| SCE-15      | JUNCTION | 13.60  | 13.60  | 0 | 12:15 | 0.354  | 0.354  | 0.000  |
| SCE-2       | JUNCTION | 1.42   | 1.42   | 0 | 12:25 | 0.0772 | 0.0772 | 0.000  |
| SCE-3       | JUNCTION | 9.63   | 9.63   | 0 | 12:25 | 0.608  | 0.608  | 0.000  |
| SCE-4       | JUNCTION | 4.16   | 4.16   | 0 | 12:30 | 0.333  | 0.333  | 0.000  |
| SCE-5       | JUNCTION | 95.82  | 95.82  | 0 | 12:15 | 3.25   | 3.25   | 0.000  |
| SCE-6       | JUNCTION | 0.18   | 0.18   | 0 | 12:20 | 0.0103 | 0.0103 | 0.000  |
| SCE-7       | JUNCTION | 39.33  | 39.33  | 0 | 12:15 | 1.02   | 1.02   | 0.000  |
| SCE-8       | JUNCTION | 47.10  | 47.10  | 0 | 12:15 | 1.19   | 1.19   | 0.000  |
| SCE-9       | JUNCTION | 0.22   | 0.22   | 0 | 12:20 | 0.0102 | 0.0102 | 0.000  |
| SC3-12B     | JUNCTION | 1.38   | 1.38   | 0 | 12:20 | 0.0545 | 0.0545 | 0.000  |
| SC3-13A     | JUNCTION | 2.61   | 2.61   | 0 | 12:25 | 0.0922 | 0.0922 | 0.000  |
| SC3_OUTFALL | OUTFALL  | 0.00   | 150.20 | 0 | 12:53 | 0      | 28.8   | 0.000  |
| SCE_OUTFALL | OUTFALL  | 0.00   | 0.08   | 0 | 03:22 | 0      | 0.148  | 0.000  |
| FSD05       | STORAGE  | 0.00   | 48.38  | 0 | 12:15 | 0      | 1.13   | 0.024  |
| FSD06       | STORAGE  | 0.00   | 200.92 | 0 | 12:16 | 0      | 5.52   | 0.001  |
| FSD09       | STORAGE  | 0.00   | 29.55  | 0 | 12:35 | 0      | 1.25   | 0.006  |
| FSD1        | STORAGE  | 0.00   | 15.40  | 0 | 12:15 | 0      | 0.35   | -0.001 |
| FSD11B      | STORAGE  | 0.00   | 79.84  | 0 | 12:15 | 0      | 2.48   | 0.190  |
| FSD12       | STORAGE  | 0.00   | 47.61  | 0 | 12:15 | 0      | 1.53   | 0.175  |
| FSD13       | STORAGE  | 0.00   | 56.24  | 0 | 12:15 | 0      | 1.33   | 0.072  |
| FSD14A      | STORAGE  | 0.00   | 137.91 | 0 | 12:15 | 0      | 4.26   | 0.002  |
| FSD14B      | STORAGE  | 0.00   | 77.46  | 0 | 12:15 | 0      | 2.14   | 0.082  |
| FSD15B      | STORAGE  | 0.00   | 18.35  | 0 | 12:25 | 0      | 0.656  | 0.006  |
| FSD16A      | STORAGE  | 0.00   | 206.37 | 0 | 12:15 | 0      | 6.13   | 0.071  |
| FSD16B      | STORAGE  | 0.00   | 60.38  | 0 | 12:15 | 0      | 1.93   | 0.001  |
| FSD17A      | STORAGE  | 0.00   | 27.45  | 0 | 12:15 | 0      | 0.707  | 0.007  |
| FSD17B      | STORAGE  | 0.00   | 34.53  | 0 | 12:15 | 0      | 0.927  | 0.091  |
| FSD18       | STORAGE  | 0.00   | 22.75  | 0 | 12:15 | 0      | 0.721  | 0.007  |
| FSD20       | STORAGE  | 0.00   | 9.29   | 0 | 12:20 | 0      | 0.215  | 0.317  |
| FSD21       | STORAGE  | 0.00   | 9.77   | 0 | 12:15 | 0      | 0.17   | 0.011  |
| FSD22       | STORAGE  | 0.00   | 7.15   | 0 | 12:20 | 0      | 0.167  | 0.008  |



|                 |         |      |        |         |   |       |        |
|-----------------|---------|------|--------|---------|---|-------|--------|
| FSD23           | STORAGE | 0.00 | 10.92  | 0 12:15 | 0 | 0.237 | 0.168  |
| FSD27           | STORAGE | 0.00 | 19.85  | 0 12:35 | 0 | 0.965 | 0.003  |
| FSD72           | STORAGE | 0.00 | 9.55   | 0 12:20 | 0 | 0.256 | 0.012  |
| FSDE1           | STORAGE | 0.00 | 9.82   | 0 12:25 | 0 | 0.42  | -0.000 |
| FSDE2           | STORAGE | 0.00 | 9.63   | 0 12:25 | 0 | 0.608 | 0.013  |
| FSDE3           | STORAGE | 0.00 | 95.82  | 0 12:15 | 0 | 3.25  | 0.007  |
| FSDE4           | STORAGE | 0.00 | 39.33  | 0 12:15 | 0 | 1.02  | 0.001  |
| FSDE5           | STORAGE | 0.00 | 47.10  | 0 12:15 | 0 | 1.19  | 0.003  |
| PNDE7           | STORAGE | 0.00 | 33.49  | 0 12:42 | 0 | 10.3  | 0.012  |
| FSDE6           | STORAGE | 0.00 | 107.37 | 0 12:15 | 0 | 3.41  | 0.004  |
| PNDW3           | STORAGE | 0.00 | 101.57 | 0 12:43 | 0 | 17.3  | 1.729  |
| EX_STOCK_POND_1 | STORAGE | 0.00 | 141.53 | 0 13:59 | 0 | 11.7  | -0.001 |
| FSD12A          | STORAGE | 0.00 | 15.01  | 0 12:15 | 0 | 0.362 | 0.001  |
| EX_STOCK_POND_2 | STORAGE | 0.00 | 155.07 | 0 13:17 | 0 | 9.53  | 0.150  |

\*\*\*\*\*  
Node Flooding Summary  
\*\*\*\*\*

Flooding refers to all water that overflows a node, whether it ponds or not.

| ----- |               |          |                                    |                       |                        |
|-------|---------------|----------|------------------------------------|-----------------------|------------------------|
|       | Total         | Maximum  |                                    |                       |                        |
| Node  | Hours Flooded | Rate CFS | Time of Max Occurrence days hr:min | Flood Volume 10^6 gal | Ponded Volume 1000 ft3 |
| ----- |               |          |                                    |                       |                        |
| DP-8  | 75.08         | 27.47    | 0 13:22                            | 10.509                | 0.000                  |

\*\*\*\*\*  
Storage Volume Summary  
\*\*\*\*\*

| -----        |                         |               |           |            |                         |               |                                    |                     |  |
|--------------|-------------------------|---------------|-----------|------------|-------------------------|---------------|------------------------------------|---------------------|--|
| Storage Unit | Average Volume 1000 ft3 | Avg Evap Pcnt | Evap Pcnt | Exfil Pcnt | Maximum Volume 1000 ft3 | Max Pcnt Full | Time of Max Occurrence days hr:min | Maximum Outflow CFS |  |
| -----        |                         |               |           |            |                         |               |                                    |                     |  |
| FSD05        | 23.707                  | 6             | 0         | 0          | 96.396                  | 24            | 0 13:03                            | 3.66                |  |
| FSD06        | 266.979                 | 22            | 0         | 0          | 554.580                 | 46            | 0 16:59                            | 4.40                |  |
| FSD09        | 39.835                  | 6             | 0         | 0          | 134.756                 | 19            | 0 15:01                            | 1.35                |  |
| FSD1         | 30.673                  | 8             | 0         | 0          | 42.539                  | 12            | 1 00:07                            | 0.09                |  |
| FSD11B       | 60.723                  | 14            | 0         | 0          | 147.593                 | 34            | 0 12:25                            | 56.11               |  |
| FSD12        | 56.655                  | 23            | 0         | 0          | 87.709                  | 35            | 0 12:27                            | 34.11               |  |
| FSD13        | 37.444                  | 11            | 0         | 0          | 106.671                 | 31            | 0 12:39                            | 11.95               |  |
| FSD14A       | 176.642                 | 11            | 0         | 0          | 418.274                 | 27            | 0 15:34                            | 4.30                |  |
| FSD14B       | 106.112                 | 21            | 0         | 0          | 174.619                 | 34            | 0 12:41                            | 19.30               |  |
| FSD15B       | 18.439                  | 3             | 0         | 0          | 70.679                  | 13            | 0 15:15                            | 0.74                |  |
| FSD16A       | 256.496                 | 22            | 0         | 0          | 473.665                 | 41            | 0 12:40                            | 64.67               |  |
| FSD16B       | 156.010                 | 30            | 0         | 0          | 221.257                 | 43            | 0 17:04                            | 1.59                |  |
| FSD17A       | 22.919                  | 4             | 0         | 0          | 67.391                  | 12            | 0 14:18                            | 1.00                |  |
| FSD17B       | 16.043                  | 9             | 0         | 0          | 69.118                  | 38            | 0 12:40                            | 10.50               |  |
| FSD18        | 26.200                  | 11            | 0         | 0          | 68.576                  | 29            | 0 14:17                            | 1.11                |  |
| FSD20        | 0.020                   | 0             | 0         | 0          | 1.711                   | 1             | 0 12:23                            | 8.86                |  |
| FSD21        | 3.701                   | 3             | 0         | 0          | 18.459                  | 14            | 0 13:28                            | 0.30                |  |
| FSD22        | 5.129                   | 5             | 0         | 0          | 18.385                  | 18            | 0 13:45                            | 0.73                |  |

|                 |         |    |   |   |         |    |   |       |        |
|-----------------|---------|----|---|---|---------|----|---|-------|--------|
| FSD23           | 3.485   | 3  | 0 | 0 | 15.863  | 12 | 0 | 12:44 | 4.77   |
| FSD27           | 37.806  | 12 | 0 | 0 | 92.863  | 31 | 0 | 15:18 | 0.83   |
| FSD72           | 6.024   | 5  | 0 | 0 | 29.280  | 22 | 0 | 14:31 | 0.45   |
| FSDE1           | 25.222  | 9  | 0 | 0 | 49.536  | 17 | 0 | 15:49 | 0.26   |
| FSDE2           | 4.432   | 2  | 0 | 0 | 41.588  | 15 | 0 | 14:53 | 2.01   |
| FSDE3           | 124.915 | 16 | 0 | 0 | 309.450 | 40 | 0 | 14:34 | 4.55   |
| FSDE4           | 47.764  | 9  | 0 | 0 | 100.237 | 19 | 0 | 14:53 | 1.15   |
| FSDE5           | 48.902  | 19 | 0 | 0 | 116.846 | 44 | 0 | 16:46 | 1.07   |
| PNDE7           | 4.201   | 0  | 0 | 0 | 41.581  | 3  | 0 | 13:30 | 25.44  |
| FSDE6           | 129.715 | 10 | 0 | 0 | 327.615 | 26 | 0 | 14:37 | 4.49   |
| PNDW3           | 0.079   | 0  | 0 | 0 | 3.827   | 0  | 0 | 12:44 | 101.57 |
| EX_STOCK_POND_1 | 712.247 | 42 | 0 | 0 | 892.739 | 53 | 0 | 16:36 | 25.46  |
| FSD12A          | 18.796  | 20 | 0 | 0 | 36.248  | 40 | 0 | 14:10 | 0.52   |
| EX_STOCK_POND_2 | 156.049 | 39 | 0 | 0 | 219.698 | 55 | 0 | 13:25 | 150.48 |

\*\*\*\*\*  
 Outfall Loading Summary  
 \*\*\*\*\*

| Outfall Node | Flow Freq | Avg Flow | Max Flow | Total Volume |
|--------------|-----------|----------|----------|--------------|
|              | Pcnt      | CFS      | CFS      | 10^6 gal     |
| SC3_OUTFALL  | 96.90     | 14.13    | 150.20   | 28.759       |
| SCE_OUTFALL  | 96.26     | 0.07     | 0.08     | 0.148        |
| System       | 96.58     | 14.20    | 150.27   | 28.906       |

\*\*\*\*\*  
 Link Flow Summary  
 \*\*\*\*\*

| Link   | Type    | Maximum  Flow | Time of Occurrence | Max  Veloc | Maximum Full Flow | Max/ Full Flow | Max/ Full Depth |
|--------|---------|---------------|--------------------|------------|-------------------|----------------|-----------------|
|        |         | CFS           | days hr:min        | ft/sec     | Flow              |                |                 |
| RT-1   | CONDUIT | 22.62         | 0 12:50            | 2.91       | 0.00              | 0.03           |                 |
| RT-10A | CONDUIT | 26.75         | 0 12:34            | 4.44       | 0.27              | 0.35           |                 |
| RT-10B | CONDUIT | 0.74          | 0 15:21            | 3.79       | 0.00              | 0.03           |                 |
| RT-11A | CONDUIT | 148.26        | 0 13:30            | 3.93       | 0.00              | 0.05           |                 |
| RT-11B | CONDUIT | 145.06        | 0 13:44            | 3.63       | 0.00              | 0.06           |                 |
| RT-11C | CONDUIT | 141.53        | 0 13:59            | 2.45       | 0.00              | 0.06           |                 |
| RT-12A | CONDUIT | 65.02         | 0 12:43            | 13.77      | 0.34              | 0.40           |                 |
| RT-12B | CONDUIT | 84.30         | 0 12:44            | 18.62      | 0.23              | 0.33           |                 |
| RT-16  | CONDUIT | 58.99         | 0 12:16            | 14.05      | 0.42              | 0.45           |                 |
| RT-17B | CONDUIT | 1.35          | 0 15:10            | 4.75       | 0.01              | 0.06           |                 |
| RT-18  | CONDUIT | 134.42        | 0 12:54            | 3.34       | 0.00              | 0.04           |                 |
| RT-19  | CONDUIT | 5.44          | 0 12:25            | 4.16       | 0.02              | 0.09           |                 |
| RT-1E  | CONDUIT | 0.26          | 0 15:51            | 1.98       | 0.00              | 0.03           |                 |
| RT-2   | CONDUIT | 17.16         | 0 12:50            | 2.83       | 0.00              | 0.03           |                 |
| RT-20  | CONDUIT | 150.13        | 0 12:53            | 5.07       | 0.00              | 0.03           |                 |
| RT-21  | CONDUIT | 4.82          | 0 12:23            | 7.52       | 0.03              | 0.12           |                 |
| RT-22  | CONDUIT | 4.75          | 0 12:48            | 12.99      | 0.05              | 0.15           |                 |

|        |         |        |   |       |       |      |      |
|--------|---------|--------|---|-------|-------|------|------|
| RT-2E  | CONDUIT | 12.22  | 0 | 12:31 | 6.62  | 0.09 | 0.21 |
| RT-3   | CONDUIT | 14.50  | 0 | 12:36 | 2.65  | 0.00 | 0.03 |
| RT-3E  | CONDUIT | 2.01   | 0 | 14:55 | 4.00  | 0.01 | 0.08 |
| RT-4   | CONDUIT | 30.94  | 0 | 12:44 | 3.06  | 0.00 | 0.04 |
| RT-4E  | CONDUIT | 24.54  | 0 | 12:37 | 8.50  | 0.17 | 0.28 |
| RT-5   | CONDUIT | 90.46  | 0 | 12:59 | 4.24  | 0.00 | 0.06 |
| RT-5E  | CONDUIT | 27.99  | 0 | 12:39 | 11.29 | 0.07 | 0.18 |
| RT-6   | CONDUIT | 28.06  | 0 | 12:39 | 3.37  | 0.00 | 0.03 |
| RT-6B  | CONDUIT | 41.94  | 0 | 13:00 | 3.35  | 0.00 | 0.05 |
| RT-6E  | CONDUIT | 1.15   | 0 | 14:59 | 3.37  | 0.01 | 0.06 |
| RT-7A  | CONDUIT | 2.82   | 0 | 12:23 | 6.88  | 0.01 | 0.07 |
| RT-7E  | CONDUIT | 29.77  | 0 | 12:42 | 7.87  | 0.08 | 0.19 |
| RT-8   | CONDUIT | 8.85   | 0 | 12:24 | 11.02 | 0.20 | 0.30 |
| RT-9A  | CONDUIT | 141.32 | 0 | 13:07 | 3.57  | 0.00 | 0.05 |
| RT-9B  | CONDUIT | 147.15 | 0 | 13:09 | 4.04  | 0.00 | 0.05 |
| RT-9C  | CONDUIT | 147.38 | 0 | 13:13 | 3.77  | 0.00 | 0.05 |
| RT-9D  | CONDUIT | 154.09 | 0 | 13:17 | 3.88  | 0.00 | 0.05 |
| RT-14  | CONDUIT | 134.52 | 0 | 12:42 | 3.53  | 0.00 | 0.04 |
| 1      | DUMMY   | 22.51  | 0 | 12:25 |       |      |      |
| 2      | DUMMY   | 12.16  | 0 | 12:25 |       |      |      |
| 3      | DUMMY   | 11.12  | 0 | 12:25 |       |      |      |
| 4      | DUMMY   | 10.85  | 0 | 12:25 |       |      |      |
| 5      | DUMMY   | 32.29  | 0 | 12:20 |       |      |      |
| 6      | DUMMY   | 9.55   | 0 | 12:20 |       |      |      |
| 7      | DUMMY   | 8.93   | 0 | 12:30 |       |      |      |
| 8      | DUMMY   | 6.28   | 0 | 12:25 |       |      |      |
| 9      | DUMMY   | 9.82   | 0 | 12:25 |       |      |      |
| 10     | DUMMY   | 1.42   | 0 | 12:25 |       |      |      |
| 11     | DUMMY   | 1.66   | 0 | 12:20 |       |      |      |
| 12     | DUMMY   | 14.49  | 0 | 12:20 |       |      |      |
| 13     | DUMMY   | 10.92  | 0 | 12:15 |       |      |      |
| 14     | DUMMY   | 9.77   | 0 | 12:15 |       |      |      |
| 15     | DUMMY   | 5.58   | 0 | 12:15 |       |      |      |
| 16     | DUMMY   | 1.95   | 0 | 12:15 |       |      |      |
| 17     | DUMMY   | 7.15   | 0 | 12:20 |       |      |      |
| 18     | DUMMY   | 34.53  | 0 | 12:15 |       |      |      |
| 20     | DUMMY   | 9.29   | 0 | 12:20 |       |      |      |
| 22     | DUMMY   | 77.46  | 0 | 12:15 |       |      |      |
| 24     | DUMMY   | 137.91 | 0 | 12:15 |       |      |      |
| 25     | DUMMY   | 56.24  | 0 | 12:15 |       |      |      |
| 27     | DUMMY   | 39.33  | 0 | 12:15 |       |      |      |
| 28     | DUMMY   | 47.10  | 0 | 12:15 |       |      |      |
| 29     | DUMMY   | 95.82  | 0 | 12:15 |       |      |      |
| 30     | DUMMY   | 60.38  | 0 | 12:15 |       |      |      |
| 34     | DUMMY   | 22.75  | 0 | 12:15 |       |      |      |
| 36     | DUMMY   | 9.63   | 0 | 12:25 |       |      |      |
| 37     | DUMMY   | 4.16   | 0 | 12:30 |       |      |      |
| 38     | DUMMY   | 24.66  | 0 | 12:25 |       |      |      |
| RT-17A | CONDUIT | 8.84   | 0 | 12:45 | 3.30  | 0.00 | 0.03 |
| 39     | DUMMY   | 13.21  | 0 | 12:30 |       |      |      |
| 40     | DUMMY   | 8.38   | 0 | 12:15 |       |      |      |
| 42     | DUMMY   | 47.61  | 0 | 12:15 |       |      |      |
| 44     | DUMMY   | 0.77   | 0 | 12:15 |       |      |      |
| 45     | DUMMY   | 0.22   | 0 | 12:20 |       |      |      |
| 46     | DUMMY   | 0.18   | 0 | 12:20 |       |      |      |
| 47     | DUMMY   | 8.00   | 0 | 12:20 |       |      |      |
| 48     | DUMMY   | 10.90  | 0 | 12:25 |       |      |      |

|                         |         |        |   |       |       |      |      |
|-------------------------|---------|--------|---|-------|-------|------|------|
| 51                      | DUMMY   | 107.37 | 0 | 12:15 |       |      |      |
| 54                      | DUMMY   | 79.84  | 0 | 12:15 |       |      |      |
| 56                      | DUMMY   | 1.99   | 0 | 12:15 |       |      |      |
| 58                      | CONDUIT | 101.57 | 0 | 12:43 | 5.30  | 0.00 | 0.02 |
| 63                      | DUMMY   | 48.38  | 0 | 12:15 |       |      |      |
| 65                      | DUMMY   | 15.40  | 0 | 12:15 |       |      |      |
| 67                      | DUMMY   | 150.20 | 0 | 12:53 |       |      |      |
| RT-15A                  | CONDUIT | 60.46  | 0 | 12:16 | 15.77 | 0.26 | 0.35 |
| RT-15B                  | CONDUIT | 90.35  | 0 | 12:17 | 15.61 | 0.15 | 0.26 |
| 69                      | DUMMY   | 52.26  | 0 | 12:15 |       |      |      |
| 70                      | DUMMY   | 31.63  | 0 | 12:15 |       |      |      |
| RT-25                   | CONDUIT | 25.43  | 0 | 13:36 | 3.08  | 0.00 | 0.08 |
| 71                      | CONDUIT | 0.08   | 0 | 03:22 | 0.10  | 1.08 | 1.00 |
| 74                      | DUMMY   | 2.94   | 0 | 12:20 |       |      |      |
| 75                      | DUMMY   | 6.43   | 0 | 12:20 |       |      |      |
| 77                      | DUMMY   | 60.26  | 0 | 12:15 |       |      |      |
| 78                      | DUMMY   | 27.45  | 0 | 12:15 |       |      |      |
| 79                      | DUMMY   | 206.37 | 0 | 12:15 |       |      |      |
| 80                      | CONDUIT | 0.30   | 0 | 13:33 | 3.12  | 0.00 | 0.04 |
| 81                      | DUMMY   | 15.01  | 0 | 12:15 |       |      |      |
| 82                      | DUMMY   | 13.60  | 0 | 12:15 |       |      |      |
| 83                      | DUMMY   | 1.53   | 0 | 12:25 |       |      |      |
| 84                      | DUMMY   | 155.07 | 0 | 13:17 |       |      |      |
| 85                      | DUMMY   | 1.38   | 0 | 12:20 |       |      |      |
| 86                      | DUMMY   | 2.61   | 0 | 12:25 |       |      |      |
| FSD01_Outlet            | DUMMY   | 0.09   | 1 | 00:07 |       |      |      |
| FSD05_Outlet            | DUMMY   | 3.66   | 0 | 13:04 |       |      |      |
| FSD06_Outlet            | DUMMY   | 4.40   | 0 | 16:59 |       |      |      |
| FSD11B_Outlet           | DUMMY   | 56.11  | 0 | 12:25 |       |      |      |
| FSD12_Outlet            | DUMMY   | 34.11  | 0 | 12:28 |       |      |      |
| FSD13_Outlet            | DUMMY   | 11.95  | 0 | 12:40 |       |      |      |
| FSD14A_Outlet           | DUMMY   | 4.30   | 0 | 15:34 |       |      |      |
| FSD14B_Outlet           | DUMMY   | 19.30  | 0 | 12:27 |       |      |      |
| FSD15B_Outlet           | DUMMY   | 0.74   | 0 | 15:16 |       |      |      |
| FSD16A_Outlet           | DUMMY   | 64.67  | 0 | 12:41 |       |      |      |
| FSD16B_Outlet           | DUMMY   | 1.59   | 0 | 17:05 |       |      |      |
| FSD17B_Outlet           | DUMMY   | 10.50  | 0 | 12:40 |       |      |      |
| FSD18_Outlet            | DUMMY   | 1.11   | 0 | 14:18 |       |      |      |
| FSD21_Outlet            | DUMMY   | 0.30   | 0 | 13:28 |       |      |      |
| FSD22_Outlet            | DUMMY   | 0.73   | 0 | 13:45 |       |      |      |
| FSD72_Outlet            | DUMMY   | 0.45   | 0 | 14:31 |       |      |      |
| FSD9_Outlet             | DUMMY   | 1.35   | 0 | 15:01 |       |      |      |
| FSDE2_Outlet            | DUMMY   | 2.01   | 0 | 14:53 |       |      |      |
| FSDE3_Outlet            | DUMMY   | 4.55   | 0 | 14:35 |       |      |      |
| FSDE4_Outlet            | DUMMY   | 1.15   | 0 | 14:53 |       |      |      |
| FSDE5_Outlet            | DUMMY   | 1.07   | 0 | 16:46 |       |      |      |
| FSDE6_Outlet            | DUMMY   | 4.49   | 0 | 14:38 |       |      |      |
| FSDE1_Outlet            | DUMMY   | 0.26   | 0 | 15:50 |       |      |      |
| PNDE7_Outlet            | DUMMY   | 25.44  | 0 | 13:31 |       |      |      |
| FSD17A_Outlet           | DUMMY   | 1.00   | 0 | 14:19 |       |      |      |
| PNDW3_Outlet            | DUMMY   | 101.57 | 0 | 12:44 |       |      |      |
| FSD27_Outlet            | DUMMY   | 0.83   | 0 | 15:19 |       |      |      |
| EX_STOCK_POND_1_OUTFALL | DUMMY   | 25.46  | 0 | 16:36 |       |      |      |
| FSD23_Outlet            | DUMMY   | 4.77   | 0 | 12:44 |       |      |      |
| FSD12A_Outlet           | DUMMY   | 0.52   | 0 | 14:11 |       |      |      |
| EX_STOCK_POND_2_OUTLET  | DUMMY   | 150.48 | 0 | 13:25 |       |      |      |

\*\*\*\*\*  
 Conduit Surcharge Summary  
 \*\*\*\*\*

| Conduit | Hours            |                  | Hours    |             | Capacity |
|---------|------------------|------------------|----------|-------------|----------|
|         | ----- Hours Full | ----- Above Full | -----    | -----       |          |
|         | Both Ends        | Upstream         | Dnstream | Normal Flow | Limited  |
| 71      | 75.08            | 75.08            | 75.08    | 0.04        | 75.08    |

Analysis begun on: Thu Mar 24 10:23:37 2022  
 Analysis ended on: Thu Mar 24 10:23:38 2022  
 Total elapsed time: 00:00:01

Sterling Ranch 2022 MDDP Amendment

5-YR Type II Storm

**NOTE: These warnings are generated from using 1 foot dummy conduits between basin nodes and detention ponds to ensure there is no additional travel time between the bottom of the basin and the detention pond, except where conveyed by a channel.**

- WARNING 04: minimum elevation drop used for Conduit 1
- WARNING 04: minimum elevation drop used for Conduit 2
- WARNING 04: minimum elevation drop used for Conduit 3
- WARNING 04: minimum elevation drop used for Conduit 4
- WARNING 04: minimum elevation drop used for Conduit 5
- WARNING 04: minimum elevation drop used for Conduit 6
- WARNING 04: minimum elevation drop used for Conduit 7
- WARNING 04: minimum elevation drop used for Conduit 8
- WARNING 04: minimum elevation drop used for Conduit 9
- WARNING 04: minimum elevation drop used for Conduit 10
- WARNING 04: minimum elevation drop used for Conduit 11
- WARNING 04: minimum elevation drop used for Conduit 12
- WARNING 04: minimum elevation drop used for Conduit 14
- WARNING 04: minimum elevation drop used for Conduit 15
- WARNING 04: minimum elevation drop used for Conduit 16
- WARNING 04: minimum elevation drop used for Conduit 17
- WARNING 04: minimum elevation drop used for Conduit 18
- WARNING 04: minimum elevation drop used for Conduit 20
- WARNING 04: minimum elevation drop used for Conduit 22
- WARNING 04: minimum elevation drop used for Conduit 27
- WARNING 04: minimum elevation drop used for Conduit 28
- WARNING 04: minimum elevation drop used for Conduit 29
- WARNING 04: minimum elevation drop used for Conduit 30
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 54
- WARNING 08: elevation drop exceeds length for Conduit 56
- WARNING 04: minimum elevation drop used for Conduit 63
- WARNING 04: minimum elevation drop used for Conduit 65
- WARNING 04: minimum elevation drop used for Conduit 67
- WARNING 04: minimum elevation drop used for Conduit 69
- WARNING 04: minimum elevation drop used for Conduit 70
- WARNING 04: minimum elevation drop used for Conduit 71
- WARNING 04: minimum elevation drop used for Conduit 74
- WARNING 04: minimum elevation drop used for Conduit 75
- WARNING 08: elevation drop exceeds length for Conduit 77
- WARNING 04: minimum elevation drop used for Conduit 78
- WARNING 04: minimum elevation drop used for Conduit 79
- WARNING 04: minimum elevation drop used for Conduit 82

WARNING 04: minimum elevation drop used for Conduit 83  
 WARNING 04: minimum elevation drop used for Conduit 85  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12\_Outlet  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12A\_Outlet

\*\*\*\*\*  
 NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.  
 \*\*\*\*\*

\*\*\*\*\*  
 Analysis Options  
 \*\*\*\*\*

Flow Units ..... CFS  
 Process Models:  
 Rainfall/Runoff ..... NO  
 RDII ..... NO  
 Snowmelt ..... NO  
 Groundwater ..... NO  
 Flow Routing ..... YES  
 Ponding Allowed ..... NO  
 Water Quality ..... NO  
 Flow Routing Method ..... KINWAVE  
 Starting Date ..... 01/01/2005 00:00:00  
 Ending Date ..... 01/04/2005 06:00:00  
 Antecedent Dry Days ..... 0.0  
 Report Time Step ..... 00:05:00  
 Routing Time Step ..... 30.00 sec

|                             | Volume    | Volume              |
|-----------------------------|-----------|---------------------|
| Flow Routing Continuity     | acre-feet | 10 <sup>6</sup> gal |
| *****                       | -----     | -----               |
| Dry Weather Inflow .....    | 0.000     | 0.000               |
| Wet Weather Inflow .....    | 0.000     | 0.000               |
| Groundwater Inflow .....    | 0.000     | 0.000               |
| RDII Inflow .....           | 0.000     | 0.000               |
| External Inflow .....       | 266.377   | 86.803              |
| External Outflow .....      | 174.441   | 56.844              |
| Flooding Loss .....         | 47.959    | 15.628              |
| Evaporation Loss .....      | 0.000     | 0.000               |
| Exfiltration Loss .....     | 0.000     | 0.000               |
| Initial Stored Volume ..... | 0.000     | 0.000               |
| Final Stored Volume .....   | 44.828    | 14.608              |
| Continuity Error (%) .....  | -0.319    |                     |

\*\*\*\*\*  
 Highest Flow Instability Indexes  
 \*\*\*\*\*

Link PNDW3\_Outlet (63)  
 Link RT-14 (63)  
 Link RT-18 (62)  
 Link 67 (61)  
 Link RT-20 (61)

\*\*\*\*\*

Routing Time Step Summary

\*\*\*\*\*

Minimum Time Step : 30.00 sec
Average Time Step : 30.00 sec
Maximum Time Step : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging : 0.00

\*\*\*\*\*

Node Depth Summary

\*\*\*\*\*

Table with columns: Node, Type, Average Depth, Maximum Depth, Maximum HGL, Time of Occurrence, Max Reported Max Depth. Rows include nodes 79 through 111A.



|         |          |      |      |        |         |      |
|---------|----------|------|------|--------|---------|------|
| SC3-11B | JUNCTION | 0.00 | 0.00 | 98.20  | 0 00:00 | 0.00 |
| SC3-12  | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-12A | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-13  | JUNCTION | 0.00 | 0.00 | 118.60 | 0 00:00 | 0.00 |
| SC3-14A | JUNCTION | 0.00 | 0.00 | 118.50 | 0 00:00 | 0.00 |
| SC3-14B | JUNCTION | 0.00 | 0.00 | 184.20 | 0 00:00 | 0.00 |
| SC3-15A | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-15B | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-16A | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-16B | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-17A | JUNCTION | 0.00 | 0.00 | 230.20 | 0 00:00 | 0.00 |
| SC3-17B | JUNCTION | 0.00 | 0.00 | 258.20 | 0 00:00 | 0.00 |
| SC3-18  | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-18B | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-19  | JUNCTION | 0.08 | 3.36 | 248.56 | 0 12:25 | 3.34 |
| SC3-1A  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-20  | JUNCTION | 0.00 | 0.00 | 324.20 | 0 00:00 | 0.00 |
| SC3-21  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-22  | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-23  | JUNCTION | 0.00 | 0.00 | 295.20 | 0 00:00 | 0.00 |
| SC3-24A | JUNCTION | 0.00 | 0.00 | 300.20 | 0 00:00 | 0.00 |
| SC3-24B | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-25  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-26  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-27  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-5A  | JUNCTION | 0.00 | 0.00 | 22.20  | 0 00:00 | 0.00 |
| SC3-5B  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-61  | JUNCTION | 0.04 | 1.11 | 29.31  | 0 12:20 | 1.10 |
| SC3-6A  | JUNCTION | 0.09 | 1.96 | 89.16  | 0 12:15 | 1.94 |
| SC3-6B  | JUNCTION | 0.00 | 0.00 | 93.20  | 0 00:00 | 0.00 |
| SC3-6C  | JUNCTION | 0.00 | 0.00 | 63.20  | 0 00:00 | 0.00 |
| SC3-7   | JUNCTION | 0.08 | 1.70 | 118.90 | 0 12:15 | 1.68 |
| SC3-72  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-73  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-74  | JUNCTION | 0.00 | 0.00 | 497.20 | 0 00:00 | 0.00 |
| SC3-75  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-76  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-77  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-78  | JUNCTION | 0.00 | 0.00 | 462.20 | 0 00:00 | 0.00 |
| SC3-79  | JUNCTION | 0.03 | 1.14 | 563.34 | 0 12:25 | 1.13 |
| SC3-8   | JUNCTION | 0.02 | 1.30 | 248.50 | 0 12:20 | 1.29 |
| SC3-80  | JUNCTION | 0.03 | 1.01 | 553.21 | 0 12:25 | 1.01 |
| SC3-81  | JUNCTION | 0.03 | 1.20 | 533.40 | 0 12:30 | 1.19 |
| SC3-82  | JUNCTION | 0.02 | 0.95 | 563.15 | 0 12:20 | 0.95 |
| SC3-88  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-89  | JUNCTION | 0.01 | 0.49 | 375.69 | 0 12:20 | 0.49 |
| SC3-9   | JUNCTION | 0.00 | 0.00 | 139.20 | 0 00:00 | 0.00 |
| SCE-1   | JUNCTION | 0.00 | 0.00 | 266.00 | 0 00:00 | 0.00 |
| SCE-10  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-11  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-13  | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-14  | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-15  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SCE-2   | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-3   | JUNCTION | 0.00 | 0.00 | 230.00 | 0 00:00 | 0.00 |
| SCE-4   | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-5   | JUNCTION | 0.00 | 0.00 | 128.90 | 0 00:00 | 0.00 |

|                 |          |      |      |        |   |       |      |
|-----------------|----------|------|------|--------|---|-------|------|
| SCE-6           | JUNCTION | 0.00 | 0.00 | 128.90 | 0 | 00:00 | 0.00 |
| SCE-7           | JUNCTION | 0.00 | 0.00 | 98.00  | 0 | 00:00 | 0.00 |
| SCE-8           | JUNCTION | 0.00 | 0.00 | 60.50  | 0 | 00:00 | 0.00 |
| SCE-9           | JUNCTION | 0.00 | 0.00 | 60.50  | 0 | 00:00 | 0.00 |
| SC3-12B         | JUNCTION | 0.00 | 0.00 | 157.20 | 0 | 00:00 | 0.00 |
| SC3-13A         | JUNCTION | 0.00 | 0.00 | 118.60 | 0 | 00:00 | 0.00 |
| SC3_OUTFALL     | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| SCE_OUTFALL     | OUTFALL  | 0.97 | 1.00 | 1.00   | 0 | 02:52 | 1.00 |
| FSD05           | STORAGE  | 2.90 | 4.99 | 27.19  | 0 | 13:19 | 4.99 |
| FSD06           | STORAGE  | 5.10 | 7.73 | 70.93  | 0 | 12:55 | 7.73 |
| FSD09           | STORAGE  | 2.36 | 6.13 | 145.33 | 0 | 13:18 | 6.12 |
| FSD1            | STORAGE  | 1.70 | 2.31 | 2.31   | 0 | 12:58 | 2.31 |
| FSD11B          | STORAGE  | 2.93 | 5.17 | 103.37 | 0 | 12:27 | 5.16 |
| FSD12           | STORAGE  | 4.27 | 5.70 | 162.70 | 0 | 12:23 | 5.69 |
| FSD13           | STORAGE  | 3.19 | 6.00 | 124.50 | 0 | 12:30 | 6.00 |
| FSD14A          | STORAGE  | 1.64 | 3.51 | 121.91 | 0 | 12:57 | 3.51 |
| FSD14B          | STORAGE  | 3.40 | 5.83 | 190.03 | 0 | 12:47 | 5.83 |
| FSD15B          | STORAGE  | 2.32 | 5.34 | 204.54 | 0 | 13:53 | 5.34 |
| FSD16A          | STORAGE  | 4.16 | 7.39 | 231.59 | 0 | 12:36 | 7.39 |
| FSD16B          | STORAGE  | 4.35 | 5.77 | 229.97 | 0 | 12:55 | 5.77 |
| FSD17A          | STORAGE  | 2.92 | 4.48 | 234.68 | 0 | 12:56 | 4.48 |
| FSD17B          | STORAGE  | 2.36 | 5.60 | 263.80 | 0 | 12:31 | 5.60 |
| FSD18           | STORAGE  | 2.65 | 4.83 | 208.03 | 0 | 13:04 | 4.83 |
| FSD20           | STORAGE  | 0.03 | 0.94 | 325.14 | 0 | 12:23 | 0.94 |
| FSD21           | STORAGE  | 0.69 | 2.71 | 334.91 | 0 | 12:38 | 2.71 |
| FSD22           | STORAGE  | 1.50 | 4.12 | 287.32 | 0 | 12:57 | 4.12 |
| FSD23           | STORAGE  | 0.73 | 2.65 | 298.65 | 0 | 12:34 | 2.65 |
| FSD27           | STORAGE  | 3.28 | 6.21 | 263.41 | 0 | 13:25 | 6.21 |
| FSD72           | STORAGE  | 1.33 | 4.41 | 344.61 | 0 | 12:56 | 4.41 |
| FSDE1           | STORAGE  | 2.67 | 4.43 | 270.43 | 0 | 15:40 | 4.43 |
| FSDE2           | STORAGE  | 0.55 | 3.68 | 233.68 | 0 | 14:46 | 3.68 |
| FSDE3           | STORAGE  | 2.91 | 5.78 | 134.68 | 0 | 14:08 | 5.78 |
| FSDE4           | STORAGE  | 2.25 | 3.92 | 101.92 | 0 | 14:12 | 3.92 |
| FSDE5           | STORAGE  | 3.19 | 6.16 | 66.66  | 0 | 15:35 | 6.16 |
| PNDE7           | STORAGE  | 0.48 | 2.15 | 34.65  | 0 | 13:36 | 2.15 |
| FSDE6           | STORAGE  | 3.01 | 4.93 | 37.43  | 0 | 14:09 | 4.93 |
| PNDW3           | STORAGE  | 0.16 | 3.10 | 121.40 | 0 | 14:12 | 3.10 |
| EX_STOCK_POND_1 | STORAGE  | 6.74 | 9.14 | 151.14 | 0 | 13:55 | 9.14 |
| FSD12A          | STORAGE  | 4.22 | 6.65 | 163.65 | 0 | 12:44 | 6.65 |
| EX_STOCK_POND_2 | STORAGE  | 3.20 | 5.08 | 234.18 | 0 | 13:07 | 5.08 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum    |                  | Lateral Inflow Volume | Total Inflow Volume | Flow Balance | Error |
|-------|----------|------------|------------------|-----------------------|---------------------|--------------|-------|
|       |          | Inflow CFS | Total Inflow CFS |                       |                     |              |       |
| 79    | JUNCTION | 0.00       | 13.23            | 0                     | 0.43                | 0.000        |       |
| 80    | JUNCTION | 0.00       | 8.99             | 0                     | 0.328               | 0.000        |       |
| 81    | JUNCTION | 0.00       | 479.49           | 0                     | 20.1                | 0.000        |       |
| DP-1E | JUNCTION | 0.00       | 29.33            | 0                     | 1.69                | 0.000        |       |
| DP-21 | JUNCTION | 0.00       | 145.61           | 0                     | 10.1                | 0.000        |       |

|               |          |        |        |   |       |        |        |           |
|---------------|----------|--------|--------|---|-------|--------|--------|-----------|
| DP-22         | JUNCTION | 0.00   | 126.55 | 0 | 12:42 | 0      | 7.95   | 0.000     |
| DP-25         | JUNCTION | 0.00   | 12.02  | 0 | 12:15 | 0      | 0.198  | 0.000     |
| DP-26         | JUNCTION | 0.00   | 9.32   | 0 | 13:53 | 0      | 1.54   | 0.000     |
| DP-2E         | JUNCTION | 0.00   | 56.23  | 0 | 12:28 | 0      | 3.89   | 0.000     |
| DP-3E         | JUNCTION | 0.00   | 60.94  | 0 | 12:34 | 0      | 7.9    | 0.000     |
| DP-4E         | JUNCTION | 0.00   | 64.13  | 0 | 12:35 | 0      | 10.6   | 0.000     |
| DP-53A        | JUNCTION | 0.00   | 456.70 | 0 | 14:19 | 0      | 56.7   | 0.000     |
| DP-56         | JUNCTION | 0.00   | 46.04  | 0 | 13:36 | 0      | 15.2   | 0.000     |
| DP-60A        | JUNCTION | 0.00   | 456.15 | 0 | 14:19 | 0      | 56.4   | 0.000     |
| DP-61         | JUNCTION | 0.00   | 448.63 | 0 | 14:13 | 0      | 52.1   | 0.000     |
| DP-63         | JUNCTION | 0.00   | 404.27 | 0 | 14:12 | 0      | 41.3   | 0.000     |
| DP-64         | JUNCTION | 0.00   | 135.67 | 0 | 12:16 | 0      | 3.34   | 0.000     |
| DP-68         | JUNCTION | 0.00   | 467.33 | 0 | 13:54 | 0      | 38.2   | 0.000     |
| DP-69         | JUNCTION | 0.00   | 521.37 | 0 | 13:09 | 0      | 23.3   | 0.000     |
| DP-70         | JUNCTION | 0.00   | 480.21 | 0 | 13:05 | 0      | 21.6   | 0.000     |
| DP-71         | JUNCTION | 0.00   | 475.49 | 0 | 13:02 | 0      | 20.6   | 0.000     |
| DP-72         | JUNCTION | 0.00   | 450.60 | 0 | 12:59 | 0      | 17.5   | 0.000     |
| DP-73         | JUNCTION | 0.00   | 442.62 | 0 | 12:57 | 0      | 17     | 0.000     |
| DP-74         | JUNCTION | 0.00   | 94.55  | 0 | 12:30 | 0      | 2.5    | 0.000     |
| DP-75         | JUNCTION | 0.00   | 274.57 | 0 | 12:41 | 0      | 9.39   | 0.000     |
| DP-77         | JUNCTION | 0.00   | 426.57 | 0 | 12:51 | 0      | 15.8   | 0.000     |
| DP-78         | JUNCTION | 0.00   | 138.33 | 0 | 12:31 | 0      | 3.81   | 0.000     |
| DP-8          | JUNCTION | 0.00   | 49.40  | 0 | 13:25 | 0      | 15.8   | 0.001     |
| DP-87         | JUNCTION | 0.00   | 531.49 | 0 | 13:17 | 0      | 27.1   | 0.000     |
| FSD9_OUTLET   | JUNCTION | 0.00   | 50.81  | 0 | 13:18 | 0      | 3.62   | 0.000     |
| FSDE1_Outlet  | JUNCTION | 0.00   | 0.79   | 0 | 15:40 | 0      | 0.6    | 0.000     |
| FSDE2_Outlet  | JUNCTION | 0.00   | 3.82   | 0 | 14:46 | 0      | 1.04   | 0.000     |
| FSDE4_Outlet  | JUNCTION | 0.00   | 2.03   | 0 | 14:12 | 0      | 1.22   | 0.000     |
| PNDW3_Outfall | JUNCTION | 0.00   | 0.00   | 0 | 00:00 | 0      | 0      | 0.000 gal |
| SC3-10        | JUNCTION | 14.36  | 14.36  | 0 | 12:20 | 0.299  | 0.299  | 0.000     |
| SC3-11A       | JUNCTION | 5.36   | 5.36   | 0 | 12:15 | 0.0757 | 0.0757 | 0.000     |
| SC3-11B       | JUNCTION | 116.98 | 116.98 | 0 | 12:15 | 3.37   | 3.37   | 0.000     |
| SC3-12        | JUNCTION | 71.53  | 71.53  | 0 | 12:15 | 2.11   | 2.11   | 0.000     |
| SC3-12A       | JUNCTION | 24.03  | 24.03  | 0 | 12:15 | 0.519  | 0.519  | 0.000     |
| SC3-13        | JUNCTION | 80.96  | 80.96  | 0 | 12:15 | 1.8    | 1.8    | 0.000     |
| SC3-14A       | JUNCTION | 201.61 | 201.61 | 0 | 12:15 | 5.77   | 5.77   | 0.000     |
| SC3-14B       | JUNCTION | 109.84 | 109.84 | 0 | 12:15 | 2.86   | 2.86   | 0.000     |
| SC3-15A       | JUNCTION | 38.41  | 38.41  | 0 | 12:30 | 1.22   | 1.22   | 0.000     |
| SC3-15B       | JUNCTION | 12.29  | 12.29  | 0 | 12:15 | 0.319  | 0.319  | 0.000     |
| SC3-16A       | JUNCTION | 292.54 | 292.54 | 0 | 12:15 | 8.21   | 8.21   | 0.000     |
| SC3-16B       | JUNCTION | 82.91  | 82.91  | 0 | 12:15 | 2.56   | 2.56   | 0.000     |
| SC3-17A       | JUNCTION | 42.18  | 42.18  | 0 | 12:15 | 0.99   | 0.99   | 0.000     |
| SC3-17B       | JUNCTION | 50.54  | 50.54  | 0 | 12:15 | 1.26   | 1.26   | 0.000     |
| SC3-18        | JUNCTION | 32.96  | 32.96  | 0 | 12:15 | 0.98   | 0.98   | 0.000     |
| SC3-18B       | JUNCTION | 4.45   | 4.45   | 0 | 12:25 | 0.184  | 0.184  | 0.000     |
| SC3-19        | JUNCTION | 78.96  | 78.96  | 0 | 12:25 | 1.97   | 1.97   | 0.000     |
| SC3-1A        | JUNCTION | 32.05  | 32.05  | 0 | 12:15 | 0.566  | 0.566  | 0.000     |
| SC3-20        | JUNCTION | 21.02  | 21.02  | 0 | 12:20 | 0.457  | 0.457  | 0.000     |
| SC3-21        | JUNCTION | 20.68  | 20.68  | 0 | 12:15 | 0.328  | 0.328  | 0.000     |
| SC3-22        | JUNCTION | 16.35  | 16.35  | 0 | 12:15 | 0.356  | 0.356  | 0.000     |
| SC3-23        | JUNCTION | 22.10  | 22.10  | 0 | 12:15 | 0.431  | 0.431  | 0.000     |
| SC3-24A       | JUNCTION | 15.26  | 15.26  | 0 | 12:20 | 0.417  | 0.417  | 0.000     |
| SC3-24B       | JUNCTION | 4.78   | 4.78   | 0 | 12:15 | 0.12   | 0.12   | 0.000     |
| SC3-25        | JUNCTION | 12.02  | 12.02  | 0 | 12:15 | 0.198  | 0.198  | 0.000     |
| SC3-26        | JUNCTION | 4.37   | 4.37   | 0 | 12:20 | 0.131  | 0.131  | 0.000     |
| SC3-27        | JUNCTION | 27.87  | 27.87  | 0 | 12:20 | 1.1    | 1.1    | 0.000     |
| SC3-5A        | JUNCTION | 75.20  | 75.20  | 0 | 12:15 | 1.53   | 1.53   | 0.000     |

|             |          |        |        |   |       |        |        |       |
|-------------|----------|--------|--------|---|-------|--------|--------|-------|
| SC3-5B      | JUNCTION | 97.13  | 97.13  | 0 | 12:15 | 2.27   | 2.27   | 0.000 |
| SC3-61      | JUNCTION | 22.40  | 22.40  | 0 | 12:20 | 0.593  | 0.593  | 0.000 |
| SC3-6A      | JUNCTION | 84.21  | 84.21  | 0 | 12:15 | 2.27   | 2.27   | 0.000 |
| SC3-6B      | JUNCTION | 49.78  | 49.78  | 0 | 12:15 | 1.18   | 1.18   | 0.000 |
| SC3-6C      | JUNCTION | 84.02  | 84.02  | 0 | 12:15 | 1.85   | 1.85   | 0.000 |
| SC3-7       | JUNCTION | 87.91  | 87.91  | 0 | 12:15 | 2.17   | 2.17   | 0.000 |
| SC3-72      | JUNCTION | 23.84  | 23.84  | 0 | 12:20 | 0.615  | 0.615  | 0.000 |
| SC3-73      | JUNCTION | 33.03  | 33.03  | 0 | 12:25 | 0.903  | 0.903  | 0.000 |
| SC3-74      | JUNCTION | 53.27  | 53.27  | 0 | 12:25 | 1.39   | 1.39   | 0.000 |
| SC3-75      | JUNCTION | 26.37  | 26.37  | 0 | 12:25 | 0.921  | 0.921  | 0.000 |
| SC3-76      | JUNCTION | 27.09  | 27.09  | 0 | 12:25 | 0.945  | 0.945  | 0.000 |
| SC3-77      | JUNCTION | 27.11  | 27.11  | 0 | 12:30 | 0.992  | 0.992  | 0.000 |
| SC3-78      | JUNCTION | 77.46  | 77.46  | 0 | 12:20 | 1.81   | 1.81   | 0.000 |
| SC3-79      | JUNCTION | 82.54  | 82.54  | 0 | 12:25 | 2.01   | 2.01   | 0.000 |
| SC3-8       | JUNCTION | 56.41  | 56.41  | 0 | 12:20 | 1.14   | 1.14   | 0.000 |
| SC3-80      | JUNCTION | 57.34  | 57.34  | 0 | 12:25 | 1.57   | 1.57   | 0.000 |
| SC3-81      | JUNCTION | 81.00  | 81.00  | 0 | 12:30 | 2.44   | 2.44   | 0.000 |
| SC3-82      | JUNCTION | 50.83  | 50.83  | 0 | 12:20 | 1.09   | 1.09   | 0.000 |
| SC3-88      | JUNCTION | 18.99  | 18.99  | 0 | 12:25 | 0.558  | 0.558  | 0.000 |
| SC3-89      | JUNCTION | 8.64   | 8.64   | 0 | 12:20 | 0.215  | 0.215  | 0.000 |
| SC3-9       | JUNCTION | 73.44  | 73.44  | 0 | 12:25 | 2.43   | 2.43   | 0.000 |
| SCE-1       | JUNCTION | 21.30  | 21.30  | 0 | 12:25 | 0.849  | 0.849  | 0.000 |
| SCE-10      | JUNCTION | 167.39 | 167.39 | 0 | 12:15 | 4.79   | 4.79   | 0.000 |
| SCE-11      | JUNCTION | 2.52   | 2.52   | 0 | 12:15 | 0.0369 | 0.0369 | 0.000 |
| SCE-13      | JUNCTION | 25.85  | 25.85  | 0 | 12:25 | 0.913  | 0.913  | 0.000 |
| SCE-14      | JUNCTION | 19.04  | 19.04  | 0 | 12:20 | 0.61   | 0.61   | 0.000 |
| SCE-15      | JUNCTION | 27.20  | 27.20  | 0 | 12:15 | 0.633  | 0.633  | 0.000 |
| SCE-2       | JUNCTION | 3.35   | 3.35   | 0 | 12:25 | 0.174  | 0.174  | 0.000 |
| SCE-3       | JUNCTION | 19.25  | 19.25  | 0 | 12:25 | 1.04   | 1.04   | 0.000 |
| SCE-4       | JUNCTION | 7.52   | 7.52   | 0 | 12:30 | 0.554  | 0.554  | 0.000 |
| SCE-5       | JUNCTION | 133.18 | 133.18 | 0 | 12:15 | 4.32   | 4.32   | 0.000 |
| SCE-6       | JUNCTION | 0.55   | 0.55   | 0 | 12:20 | 0.0275 | 0.0275 | 0.000 |
| SCE-7       | JUNCTION | 54.94  | 54.94  | 0 | 12:15 | 1.36   | 1.36   | 0.000 |
| SCE-8       | JUNCTION | 61.37  | 61.37  | 0 | 12:15 | 1.54   | 1.54   | 0.000 |
| SCE-9       | JUNCTION | 0.68   | 0.68   | 0 | 12:20 | 0.0274 | 0.0274 | 0.000 |
| SC3-12B     | JUNCTION | 4.03   | 4.03   | 0 | 12:20 | 0.158  | 0.158  | 0.000 |
| SC3-13A     | JUNCTION | 7.62   | 7.62   | 0 | 12:20 | 0.268  | 0.268  | 0.000 |
| SC3_OUTFALL | OUTFALL  | 0.00   | 456.70 | 0 | 14:19 | 0      | 56.7   | 0.000 |
| SCE_OUTFALL | OUTFALL  | 0.00   | 0.08   | 0 | 02:51 | 0      | 0.149  | 0.000 |
| FSD05       | STORAGE  | 0.00   | 75.20  | 0 | 12:15 | 0      | 1.53   | 0.015 |
| FSD06       | STORAGE  | 0.00   | 302.10 | 0 | 12:16 | 0      | 7.53   | 0.032 |
| FSD09       | STORAGE  | 0.00   | 112.72 | 0 | 12:33 | 0      | 3.62   | 0.115 |
| FSD1        | STORAGE  | 0.00   | 32.05  | 0 | 12:15 | 0      | 0.566  | 0.035 |
| FSD11B      | STORAGE  | 0.00   | 116.98 | 0 | 12:15 | 0      | 3.37   | 0.148 |
| FSD12       | STORAGE  | 0.00   | 71.53  | 0 | 12:15 | 0      | 2.11   | 0.177 |
| FSD13       | STORAGE  | 0.00   | 80.96  | 0 | 12:15 | 0      | 1.8    | 0.091 |
| FSD14A      | STORAGE  | 0.00   | 201.61 | 0 | 12:15 | 0      | 5.77   | 0.035 |
| FSD14B      | STORAGE  | 0.00   | 109.84 | 0 | 12:15 | 0      | 2.86   | 0.059 |
| FSD15B      | STORAGE  | 0.00   | 46.09  | 0 | 12:25 | 0      | 1.54   | 0.037 |
| FSD16A      | STORAGE  | 0.00   | 292.54 | 0 | 12:15 | 0      | 8.21   | 0.070 |
| FSD16B      | STORAGE  | 0.00   | 82.91  | 0 | 12:15 | 0      | 2.56   | 0.041 |
| FSD17A      | STORAGE  | 0.00   | 42.18  | 0 | 12:15 | 0      | 0.99   | 0.032 |
| FSD17B      | STORAGE  | 0.00   | 50.54  | 0 | 12:15 | 0      | 1.26   | 0.088 |
| FSD18       | STORAGE  | 0.00   | 32.96  | 0 | 12:15 | 0      | 0.98   | 0.037 |
| FSD20       | STORAGE  | 0.00   | 21.02  | 0 | 12:20 | 0      | 0.457  | 0.310 |
| FSD21       | STORAGE  | 0.00   | 20.68  | 0 | 12:15 | 0      | 0.328  | 0.212 |
| FSD22       | STORAGE  | 0.00   | 16.35  | 0 | 12:15 | 0      | 0.356  | 0.124 |

|                 |         |      |        |   |       |   |       |        |
|-----------------|---------|------|--------|---|-------|---|-------|--------|
| FSD23           | STORAGE | 0.00 | 22.10  | 0 | 12:15 | 0 | 0.431 | 0.204  |
| FSD27           | STORAGE | 0.00 | 48.02  | 0 | 12:27 | 0 | 1.72  | 0.075  |
| FSD72           | STORAGE | 0.00 | 23.84  | 0 | 12:20 | 0 | 0.615 | -1.739 |
| FSDE1           | STORAGE | 0.00 | 21.30  | 0 | 12:25 | 0 | 0.849 | 0.001  |
| FSDE2           | STORAGE | 0.00 | 19.25  | 0 | 12:25 | 0 | 1.04  | 0.021  |
| FSDE3           | STORAGE | 0.00 | 133.18 | 0 | 12:15 | 0 | 4.32  | 0.010  |
| FSDE4           | STORAGE | 0.00 | 54.94  | 0 | 12:15 | 0 | 1.36  | 0.007  |
| FSDE5           | STORAGE | 0.00 | 61.37  | 0 | 12:15 | 0 | 1.54  | 0.003  |
| PNDE7           | STORAGE | 0.00 | 70.68  | 0 | 12:37 | 0 | 15.2  | 0.019  |
| FSDE6           | STORAGE | 0.00 | 167.39 | 0 | 12:15 | 0 | 4.79  | 0.009  |
| PNDW3           | STORAGE | 0.00 | 467.33 | 0 | 13:54 | 0 | 38.2  | 0.802  |
| EX_STOCK_POND_1 | STORAGE | 0.00 | 512.56 | 0 | 13:27 | 0 | 27.2  | 0.136  |
| FSD12A          | STORAGE | 0.00 | 24.03  | 0 | 12:15 | 0 | 0.519 | 0.083  |
| EX_STOCK_POND_2 | STORAGE | 0.00 | 480.21 | 0 | 13:05 | 0 | 21.6  | 0.183  |

\*\*\*\*\*  
Node Flooding Summary  
\*\*\*\*\*

Flooding refers to all water that overflows a node, whether it ponds or not.

| -----         |                       |          |                                    |                       |                        |
|---------------|-----------------------|----------|------------------------------------|-----------------------|------------------------|
| Total Maximum |                       |          |                                    |                       |                        |
| Node          | Maximum Hours Flooded | Rate CFS | Time of Max Occurrence days hr:min | Flood Volume 10^6 gal | Ponded Volume 1000 ft3 |
| -----         |                       |          |                                    |                       |                        |
| DP-8          | 75.60                 | 49.33    | 0 13:25                            | 15.627                | 0.000                  |

\*\*\*\*\*  
Storage Volume Summary  
\*\*\*\*\*

| -----        |                         |               |            |            |                         |               |                                    |                     |  |
|--------------|-------------------------|---------------|------------|------------|-------------------------|---------------|------------------------------------|---------------------|--|
| Storage Unit | Average Volume 1000 ft3 | Avg Evap Pcnt | Exfil Pcnt | Exfil Pcnt | Maximum Volume 1000 ft3 | Max Pcnt Full | Time of Max Occurrence days hr:min | Maximum Outflow CFS |  |
| -----        |                         |               |            |            |                         |               |                                    |                     |  |
| FSD05        | 30.086                  | 7             | 0          | 0          | 136.865                 | 34            | 0 13:19                            | 3.70                |  |
| FSD06        | 295.894                 | 25            | 0          | 0          | 662.116                 | 55            | 0 12:54                            | 36.40               |  |
| FSD09        | 55.672                  | 8             | 0          | 0          | 263.446                 | 37            | 0 13:17                            | 50.81               |  |
| FSD1         | 38.781                  | 11            | 0          | 0          | 57.600                  | 16            | 0 12:58                            | 2.83                |  |
| FSD11B       | 62.199                  | 14            | 0          | 0          | 167.884                 | 39            | 0 12:26                            | 77.00               |  |
| FSD12        | 57.532                  | 23            | 0          | 0          | 95.637                  | 38            | 0 12:22                            | 61.05               |  |
| FSD13        | 39.377                  | 11            | 0          | 0          | 128.243                 | 37            | 0 12:30                            | 30.29               |  |
| FSD14A       | 187.782                 | 12            | 0          | 0          | 495.234                 | 32            | 0 12:57                            | 33.87               |  |
| FSD14B       | 108.736                 | 21            | 0          | 0          | 234.571                 | 46            | 0 12:47                            | 19.30               |  |
| FSD15B       | 38.012                  | 7             | 0          | 0          | 144.290                 | 26            | 0 13:53                            | 9.32                |  |
| FSD16A       | 261.763                 | 22            | 0          | 0          | 580.691                 | 50            | 0 12:35                            | 116.78              |  |
| FSD16B       | 158.197                 | 31            | 0          | 0          | 230.901                 | 45            | 0 12:54                            | 17.70               |  |
| FSD17A       | 25.084                  | 4             | 0          | 0          | 86.123                  | 15            | 0 12:55                            | 6.42                |  |
| FSD17B       | 17.311                  | 10            | 0          | 0          | 80.764                  | 45            | 0 12:30                            | 24.50               |  |
| FSD18        | 28.168                  | 12            | 0          | 0          | 83.818                  | 36            | 0 13:04                            | 6.02                |  |
| FSD20        | 0.043                   | 0             | 0          | 0          | 4.099                   | 3             | 0 12:23                            | 19.88               |  |
| FSD21        | 4.018                   | 3             | 0          | 0          | 22.630                  | 17            | 0 12:38                            | 8.99                |  |
| FSD22        | 5.622                   | 6             | 0          | 0          | 27.937                  | 28            | 0 12:57                            | 6.21                |  |

|                 |         |    |   |   |          |    |   |       |        |
|-----------------|---------|----|---|---|----------|----|---|-------|--------|
| FSD23           | 3.772   | 3  | 0 | 0 | 20.764   | 15 | 0 | 12:33 | 13.23  |
| FSD27           | 42.174  | 14 | 0 | 0 | 128.077  | 42 | 0 | 13:25 | 16.48  |
| FSD72           | 10.475  | 8  | 0 | 0 | 45.268   | 34 | 0 | 12:55 | 11.95  |
| FSDE1           | 53.984  | 19 | 0 | 0 | 102.501  | 36 | 0 | 15:39 | 0.79   |
| FSDE2           | 9.016   | 3  | 0 | 0 | 79.268   | 28 | 0 | 14:46 | 3.82   |
| FSDE3           | 152.605 | 20 | 0 | 0 | 410.135  | 54 | 0 | 14:08 | 7.16   |
| FSDE4           | 55.850  | 11 | 0 | 0 | 130.370  | 25 | 0 | 14:12 | 2.03   |
| FSDE5           | 66.207  | 25 | 0 | 0 | 151.891  | 58 | 0 | 15:35 | 1.52   |
| PNDE7           | 8.876   | 1  | 0 | 0 | 107.251  | 7  | 0 | 13:36 | 46.04  |
| FSDE6           | 168.817 | 13 | 0 | 0 | 464.762  | 37 | 0 | 14:09 | 7.20   |
| PNDW3           | 2.758   | 0  | 0 | 0 | 193.395  | 7  | 0 | 14:12 | 398.71 |
| EX_STOCK_POND_1 | 729.980 | 43 | 0 | 0 | 1098.099 | 65 | 0 | 13:54 | 383.82 |
| FSD12A          | 19.474  | 21 | 0 | 0 | 43.157   | 47 | 0 | 12:43 | 6.18   |
| EX_STOCK_POND_2 | 158.034 | 40 | 0 | 0 | 262.808  | 66 | 0 | 13:07 | 479.49 |

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq | Avg Flow | Max Flow | Total Volume |
|--------------|-----------|----------|----------|--------------|
|              | Pcnt      | CFS      | CFS      | 10^6 gal     |
| SC3_OUTFALL  | 97.49     | 27.69    | 456.70   | 56.691       |
| SCE_OUTFALL  | 96.88     | 0.07     | 0.08     | 0.149        |
| System       | 97.18     | 27.76    | 456.78   | 56.840       |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow | Time of Occurrence | Max  Veloc | Maximum Full Flow | Max/ Full | Max/ Full Depth |
|--------|---------|---------------|--------------------|------------|-------------------|-----------|-----------------|
|        |         | CFS           | days hr:min        | ft/sec     | Flow              |           |                 |
| RT-1   | CONDUIT | 72.48         | 0 12:46            | 3.92       | 0.00              | 0.06      |                 |
| RT-10A | CONDUIT | 76.75         | 0 12:31            | 5.75       | 0.77              | 0.66      |                 |
| RT-10B | CONDUIT | 9.31          | 0 13:56            | 8.21       | 0.02              | 0.11      |                 |
| RT-11A | CONDUIT | 478.22        | 0 13:10            | 5.69       | 0.01              | 0.10      |                 |
| RT-11B | CONDUIT | 508.16        | 0 13:17            | 5.35       | 0.01              | 0.11      |                 |
| RT-11C | CONDUIT | 512.56        | 0 13:27            | 3.69       | 0.01              | 0.13      |                 |
| RT-12A | CONDUIT | 126.31        | 0 12:44            | 16.28      | 0.66              | 0.59      |                 |
| RT-12B | CONDUIT | 145.55        | 0 12:46            | 21.62      | 0.40              | 0.44      |                 |
| RT-16  | CONDUIT | 82.73         | 0 12:16            | 15.28      | 0.59              | 0.55      |                 |
| RT-17B | CONDUIT | 50.64         | 0 13:21            | 14.07      | 0.23              | 0.33      |                 |
| RT-18  | CONDUIT | 447.47        | 0 14:19            | 4.95       | 0.01              | 0.09      |                 |
| RT-19  | CONDUIT | 21.94         | 0 12:24            | 6.23       | 0.07              | 0.18      |                 |
| RT-1E  | CONDUIT | 0.79          | 0 15:41            | 2.77       | 0.01              | 0.06      |                 |
| RT-2   | CONDUIT | 47.12         | 0 12:44            | 3.62       | 0.00              | 0.05      |                 |
| RT-20  | CONDUIT | 456.12        | 0 14:19            | 7.46       | 0.00              | 0.06      |                 |
| RT-21  | CONDUIT | 10.76         | 0 12:21            | 9.44       | 0.07              | 0.18      |                 |
| RT-22  | CONDUIT | 13.20         | 0 12:36            | 12.76      | 0.14              | 0.26      |                 |

|        |         |        |         |       |      |      |
|--------|---------|--------|---------|-------|------|------|
| RT-2E  | CONDUIT | 29.01  | 0 12:29 | 8.47  | 0.22 | 0.32 |
| RT-3   | CONDUIT | 46.37  | 0 12:33 | 3.57  | 0.00 | 0.05 |
| RT-3E  | CONDUIT | 3.82   | 0 14:47 | 4.86  | 0.03 | 0.11 |
| RT-4   | CONDUIT | 88.71  | 0 12:39 | 3.98  | 0.00 | 0.06 |
| RT-4E  | CONDUIT | 55.54  | 0 12:33 | 10.62 | 0.39 | 0.44 |
| RT-5   | CONDUIT | 263.80 | 0 12:51 | 5.64  | 0.00 | 0.11 |
| RT-5E  | CONDUIT | 60.91  | 0 12:35 | 14.12 | 0.16 | 0.27 |
| RT-6   | CONDUIT | 75.03  | 0 12:35 | 4.34  | 0.00 | 0.05 |
| RT-6B  | CONDUIT | 113.27 | 0 12:52 | 4.18  | 0.00 | 0.07 |
| RT-6E  | CONDUIT | 2.03   | 0 14:17 | 4.01  | 0.01 | 0.08 |
| RT-7A  | CONDUIT | 8.57   | 0 12:22 | 9.71  | 0.03 | 0.12 |
| RT-7E  | CONDUIT | 64.05  | 0 12:37 | 9.82  | 0.17 | 0.28 |
| RT-8   | CONDUIT | 19.87  | 0 12:24 | 13.74 | 0.45 | 0.47 |
| RT-9A  | CONDUIT | 419.94 | 0 12:58 | 5.03  | 0.01 | 0.10 |
| RT-9B  | CONDUIT | 442.30 | 0 12:59 | 5.74  | 0.01 | 0.09 |
| RT-9C  | CONDUIT | 449.10 | 0 13:02 | 5.36  | 0.01 | 0.10 |
| RT-9D  | CONDUIT | 474.06 | 0 13:05 | 5.53  | 0.01 | 0.10 |
| RT-14  | CONDUIT | 403.80 | 0 14:16 | 5.09  | 0.01 | 0.08 |
| 1      | DUMMY   | 53.27  | 0 12:25 |       |      |      |
| 2      | DUMMY   | 33.03  | 0 12:25 |       |      |      |
| 3      | DUMMY   | 26.37  | 0 12:25 |       |      |      |
| 4      | DUMMY   | 27.09  | 0 12:25 |       |      |      |
| 5      | DUMMY   | 77.46  | 0 12:20 |       |      |      |
| 6      | DUMMY   | 23.84  | 0 12:20 |       |      |      |
| 7      | DUMMY   | 27.11  | 0 12:30 |       |      |      |
| 8      | DUMMY   | 18.99  | 0 12:25 |       |      |      |
| 9      | DUMMY   | 21.30  | 0 12:25 |       |      |      |
| 10     | DUMMY   | 3.35   | 0 12:25 |       |      |      |
| 11     | DUMMY   | 4.37   | 0 12:20 |       |      |      |
| 12     | DUMMY   | 27.87  | 0 12:20 |       |      |      |
| 13     | DUMMY   | 22.10  | 0 12:15 |       |      |      |
| 14     | DUMMY   | 20.68  | 0 12:15 |       |      |      |
| 15     | DUMMY   | 12.02  | 0 12:15 |       |      |      |
| 16     | DUMMY   | 4.78   | 0 12:15 |       |      |      |
| 17     | DUMMY   | 16.35  | 0 12:15 |       |      |      |
| 18     | DUMMY   | 50.54  | 0 12:15 |       |      |      |
| 20     | DUMMY   | 21.02  | 0 12:20 |       |      |      |
| 22     | DUMMY   | 109.84 | 0 12:15 |       |      |      |
| 24     | DUMMY   | 201.61 | 0 12:15 |       |      |      |
| 25     | DUMMY   | 80.96  | 0 12:15 |       |      |      |
| 27     | DUMMY   | 54.94  | 0 12:15 |       |      |      |
| 28     | DUMMY   | 61.37  | 0 12:15 |       |      |      |
| 29     | DUMMY   | 133.18 | 0 12:15 |       |      |      |
| 30     | DUMMY   | 82.91  | 0 12:15 |       |      |      |
| 34     | DUMMY   | 32.96  | 0 12:15 |       |      |      |
| 36     | DUMMY   | 19.25  | 0 12:25 |       |      |      |
| 37     | DUMMY   | 7.52   | 0 12:30 |       |      |      |
| 38     | DUMMY   | 73.44  | 0 12:25 |       |      |      |
| RT-17A | CONDUIT | 46.37  | 0 12:36 | 4.98  | 0.00 | 0.06 |
| 39     | DUMMY   | 38.41  | 0 12:30 |       |      |      |
| 40     | DUMMY   | 12.29  | 0 12:15 |       |      |      |
| 42     | DUMMY   | 71.53  | 0 12:15 |       |      |      |
| 44     | DUMMY   | 2.52   | 0 12:15 |       |      |      |
| 45     | DUMMY   | 0.68   | 0 12:20 |       |      |      |
| 46     | DUMMY   | 0.55   | 0 12:20 |       |      |      |
| 47     | DUMMY   | 19.04  | 0 12:20 |       |      |      |
| 48     | DUMMY   | 25.85  | 0 12:25 |       |      |      |

|                         |         |        |   |       |       |      |      |
|-------------------------|---------|--------|---|-------|-------|------|------|
| 51                      | DUMMY   | 167.39 | 0 | 12:15 |       |      |      |
| 54                      | DUMMY   | 116.98 | 0 | 12:15 |       |      |      |
| 56                      | DUMMY   | 5.36   | 0 | 12:15 |       |      |      |
| 58                      | CONDUIT | 467.33 | 0 | 13:54 | 9.15  | 0.00 | 0.05 |
| 63                      | DUMMY   | 75.20  | 0 | 12:15 |       |      |      |
| 65                      | DUMMY   | 32.05  | 0 | 12:15 |       |      |      |
| 67                      | DUMMY   | 456.70 | 0 | 14:19 |       |      |      |
| RT-15A                  | CONDUIT | 87.12  | 0 | 12:16 | 17.40 | 0.37 | 0.42 |
| RT-15B                  | CONDUIT | 134.10 | 0 | 12:16 | 17.48 | 0.22 | 0.32 |
| 69                      | DUMMY   | 84.02  | 0 | 12:15 |       |      |      |
| 70                      | DUMMY   | 49.78  | 0 | 12:15 |       |      |      |
| RT-25                   | CONDUIT | 46.03  | 0 | 13:41 | 3.62  | 0.01 | 0.10 |
| 71                      | CONDUIT | 0.08   | 0 | 02:51 | 0.10  | 1.08 | 1.00 |
| 74                      | DUMMY   | 14.36  | 0 | 12:20 |       |      |      |
| 75                      | DUMMY   | 15.26  | 0 | 12:20 |       |      |      |
| 77                      | DUMMY   | 97.13  | 0 | 12:15 |       |      |      |
| 78                      | DUMMY   | 42.18  | 0 | 12:15 |       |      |      |
| 79                      | DUMMY   | 292.54 | 0 | 12:15 |       |      |      |
| 80                      | CONDUIT | 8.97   | 0 | 12:40 | 15.91 | 0.09 | 0.20 |
| 81                      | DUMMY   | 24.03  | 0 | 12:15 |       |      |      |
| 82                      | DUMMY   | 27.20  | 0 | 12:15 |       |      |      |
| 83                      | DUMMY   | 4.45   | 0 | 12:25 |       |      |      |
| 84                      | DUMMY   | 480.21 | 0 | 13:05 |       |      |      |
| 85                      | DUMMY   | 4.03   | 0 | 12:20 |       |      |      |
| 86                      | DUMMY   | 7.62   | 0 | 12:20 |       |      |      |
| FSD01_Outlet            | DUMMY   | 2.83   | 0 | 12:58 |       |      |      |
| FSD05_Outlet            | DUMMY   | 3.70   | 0 | 12:18 |       |      |      |
| FSD06_Outlet            | DUMMY   | 36.40  | 0 | 12:55 |       |      |      |
| FSD11B_Outlet           | DUMMY   | 77.00  | 0 | 12:15 |       |      |      |
| FSD12_Outlet            | DUMMY   | 61.05  | 0 | 12:23 |       |      |      |
| FSD13_Outlet            | DUMMY   | 30.29  | 0 | 12:30 |       |      |      |
| FSD14A_Outlet           | DUMMY   | 33.87  | 0 | 12:57 |       |      |      |
| FSD14B_Outlet           | DUMMY   | 19.30  | 0 | 12:14 |       |      |      |
| FSD15B_Outlet           | DUMMY   | 9.32   | 0 | 13:53 |       |      |      |
| FSD16A_Outlet           | DUMMY   | 116.78 | 0 | 12:36 |       |      |      |
| FSD16B_Outlet           | DUMMY   | 17.70  | 0 | 12:55 |       |      |      |
| FSD17B_Outlet           | DUMMY   | 24.50  | 0 | 12:31 |       |      |      |
| FSD18_Outlet            | DUMMY   | 6.02   | 0 | 13:04 |       |      |      |
| FSD21_Outlet            | DUMMY   | 8.99   | 0 | 12:38 |       |      |      |
| FSD22_Outlet            | DUMMY   | 6.21   | 0 | 12:57 |       |      |      |
| FSD72_Outlet            | DUMMY   | 11.95  | 0 | 12:56 |       |      |      |
| FSD9_Outlet             | DUMMY   | 50.81  | 0 | 13:18 |       |      |      |
| FSDE2_Outlet            | DUMMY   | 3.82   | 0 | 14:46 |       |      |      |
| FSDE3_Outlet            | DUMMY   | 7.16   | 0 | 14:08 |       |      |      |
| FSDE4_Outlet            | DUMMY   | 2.03   | 0 | 14:12 |       |      |      |
| FSDE5_Outlet            | DUMMY   | 1.52   | 0 | 15:35 |       |      |      |
| FSDE6_Outlet            | DUMMY   | 7.20   | 0 | 14:09 |       |      |      |
| FSDE1_Outlet            | DUMMY   | 0.79   | 0 | 15:40 |       |      |      |
| PNDE7_Outlet            | DUMMY   | 46.04  | 0 | 13:36 |       |      |      |
| FSD17A_Outlet           | DUMMY   | 6.42   | 0 | 12:56 |       |      |      |
| PNDW3_Outlet            | DUMMY   | 398.71 | 0 | 14:12 |       |      |      |
| FSD27_Outlet            | DUMMY   | 16.48  | 0 | 13:25 |       |      |      |
| EX_STOCK_POND_1_OUTFALL | DUMMY   | 383.82 | 0 | 13:55 |       |      |      |
| FSD23_Outlet            | DUMMY   | 13.23  | 0 | 12:34 |       |      |      |
| FSD12A_Outlet           | DUMMY   | 6.18   | 0 | 12:44 |       |      |      |
| EX_STOCK_POND_2_OUTLET  | DUMMY   | 479.49 | 0 | 13:07 |       |      |      |



\*\*\*\*\*  
 Conduit Surcharge Summary  
 \*\*\*\*\*

| Conduit | Hours            |          | Hours      |          | Capacity    |         |
|---------|------------------|----------|------------|----------|-------------|---------|
|         | ----- Hours Full | -----    | Above Full | Dnstream |             |         |
|         | Both Ends        | Upstream |            |          | Normal Flow | Limited |
| 71      | 75.60            | 75.60    | 75.60      | 0.04     | 75.60       |         |

Analysis begun on: Thu Mar 24 10:22:11 2022  
 Analysis ended on: Thu Mar 24 10:22:11 2022  
 Total elapsed time: < 1 sec

Sterling Ranch 2022 MDDP Amendment

10-YR Type II Storm

**NOTE: These warnings are generated from using 1 foot dummy conduits between basin nodes and detention ponds to ensure there is no additional travel time between the bottom of the basin and the detention pond, except where conveyed by a channel.**

- WARNING 04: minimum elevation drop used for Conduit 1
- WARNING 04: minimum elevation drop used for Conduit 2
- WARNING 04: minimum elevation drop used for Conduit 3
- WARNING 04: minimum elevation drop used for Conduit 4
- WARNING 04: minimum elevation drop used for Conduit 5
- WARNING 04: minimum elevation drop used for Conduit 6
- WARNING 04: minimum elevation drop used for Conduit 7
- WARNING 04: minimum elevation drop used for Conduit 8
- WARNING 04: minimum elevation drop used for Conduit 9
- WARNING 04: minimum elevation drop used for Conduit 10
- WARNING 04: minimum elevation drop used for Conduit 11
- WARNING 04: minimum elevation drop used for Conduit 12
- WARNING 04: minimum elevation drop used for Conduit 14
- WARNING 04: minimum elevation drop used for Conduit 15
- WARNING 04: minimum elevation drop used for Conduit 16
- WARNING 04: minimum elevation drop used for Conduit 17
- WARNING 04: minimum elevation drop used for Conduit 18
- WARNING 04: minimum elevation drop used for Conduit 20
- WARNING 04: minimum elevation drop used for Conduit 22
- WARNING 04: minimum elevation drop used for Conduit 27
- WARNING 04: minimum elevation drop used for Conduit 28
- WARNING 04: minimum elevation drop used for Conduit 29
- WARNING 04: minimum elevation drop used for Conduit 30
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 54
- WARNING 08: elevation drop exceeds length for Conduit 56
- WARNING 04: minimum elevation drop used for Conduit 63
- WARNING 04: minimum elevation drop used for Conduit 65
- WARNING 04: minimum elevation drop used for Conduit 67
- WARNING 04: minimum elevation drop used for Conduit 69
- WARNING 04: minimum elevation drop used for Conduit 70
- WARNING 04: minimum elevation drop used for Conduit 71
- WARNING 04: minimum elevation drop used for Conduit 74
- WARNING 04: minimum elevation drop used for Conduit 75
- WARNING 08: elevation drop exceeds length for Conduit 77
- WARNING 04: minimum elevation drop used for Conduit 78
- WARNING 04: minimum elevation drop used for Conduit 79
- WARNING 04: minimum elevation drop used for Conduit 82

WARNING 04: minimum elevation drop used for Conduit 83  
 WARNING 04: minimum elevation drop used for Conduit 85  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12\_Outlet  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12A\_Outlet

\*\*\*\*\*  
 NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.  
 \*\*\*\*\*

\*\*\*\*\*  
 Analysis Options  
 \*\*\*\*\*

Flow Units ..... CFS  
 Process Models:  
 Rainfall/Runoff ..... NO  
 RDII ..... NO  
 Snowmelt ..... NO  
 Groundwater ..... NO  
 Flow Routing ..... YES  
 Ponding Allowed ..... NO  
 Water Quality ..... NO  
 Flow Routing Method ..... KINWAVE  
 Starting Date ..... 01/01/2005 00:00:00  
 Ending Date ..... 01/04/2005 06:00:00  
 Antecedent Dry Days ..... 0.0  
 Report Time Step ..... 00:05:00  
 Routing Time Step ..... 30.00 sec

|                             | Volume    | Volume              |
|-----------------------------|-----------|---------------------|
| Flow Routing Continuity     | acre-feet | 10 <sup>6</sup> gal |
| *****                       | -----     | -----               |
| Dry Weather Inflow .....    | 0.000     | 0.000               |
| Wet Weather Inflow .....    | 0.000     | 0.000               |
| Groundwater Inflow .....    | 0.000     | 0.000               |
| RDII Inflow .....           | 0.000     | 0.000               |
| External Inflow .....       | 353.936   | 115.335             |
| External Outflow .....      | 246.678   | 80.384              |
| Flooding Loss .....         | 62.771    | 20.455              |
| Evaporation Loss .....      | 0.000     | 0.000               |
| Exfiltration Loss .....     | 0.000     | 0.000               |
| Initial Stored Volume ..... | 0.000     | 0.000               |
| Final Stored Volume .....   | 45.570    | 14.850              |
| Continuity Error (%) .....  | -0.306    |                     |

\*\*\*\*\*  
 Highest Flow Instability Indexes  
 \*\*\*\*\*

Link PNDW3\_Outlet (62)  
 Link RT-14 (62)  
 Link RT-18 (62)  
 Link 67 (61)  
 Link RT-20 (61)

\*\*\*\*\*

Routing Time Step Summary

\*\*\*\*\*

Minimum Time Step : 30.00 sec
Average Time Step : 30.00 sec
Maximum Time Step : 30.00 sec
Percent in Steady State : 0.00
Average Iterations per Step : 1.00
Percent Not Converging : 0.00

\*\*\*\*\*

Node Depth Summary

\*\*\*\*\*

Table with columns: Node, Type, Average Depth, Maximum Depth, Maximum HGL, Time of Occurrence, Max Reported Max Depth. Rows include nodes 79 through SC3-11A.

|         |          |      |      |        |         |      |
|---------|----------|------|------|--------|---------|------|
| SC3-11B | JUNCTION | 0.00 | 0.00 | 98.20  | 0 00:00 | 0.00 |
| SC3-12  | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-12A | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-13  | JUNCTION | 0.00 | 0.00 | 118.60 | 0 00:00 | 0.00 |
| SC3-14A | JUNCTION | 0.00 | 0.00 | 118.50 | 0 00:00 | 0.00 |
| SC3-14B | JUNCTION | 0.00 | 0.00 | 184.20 | 0 00:00 | 0.00 |
| SC3-15A | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-15B | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-16A | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-16B | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-17A | JUNCTION | 0.00 | 0.00 | 230.20 | 0 00:00 | 0.00 |
| SC3-17B | JUNCTION | 0.00 | 0.00 | 258.20 | 0 00:00 | 0.00 |
| SC3-18  | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-18B | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-19  | JUNCTION | 0.10 | 5.00 | 250.20 | 0 12:19 | 5.00 |
| SC3-1A  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-20  | JUNCTION | 0.00 | 0.00 | 324.20 | 0 00:00 | 0.00 |
| SC3-21  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-22  | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-23  | JUNCTION | 0.00 | 0.00 | 295.20 | 0 00:00 | 0.00 |
| SC3-24A | JUNCTION | 0.00 | 0.00 | 300.20 | 0 00:00 | 0.00 |
| SC3-24B | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-25  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-26  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-27  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-5A  | JUNCTION | 0.00 | 0.00 | 22.20  | 0 00:00 | 0.00 |
| SC3-5B  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-61  | JUNCTION | 0.05 | 1.41 | 29.61  | 0 12:20 | 1.40 |
| SC3-6A  | JUNCTION | 0.10 | 2.29 | 89.49  | 0 12:15 | 2.25 |
| SC3-6B  | JUNCTION | 0.00 | 0.00 | 93.20  | 0 00:00 | 0.00 |
| SC3-6C  | JUNCTION | 0.00 | 0.00 | 63.20  | 0 00:00 | 0.00 |
| SC3-7   | JUNCTION | 0.09 | 1.92 | 119.12 | 0 12:15 | 1.90 |
| SC3-72  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-73  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-74  | JUNCTION | 0.00 | 0.00 | 497.20 | 0 00:00 | 0.00 |
| SC3-75  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-76  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-77  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-78  | JUNCTION | 0.00 | 0.00 | 462.20 | 0 00:00 | 0.00 |
| SC3-79  | JUNCTION | 0.04 | 1.36 | 563.56 | 0 12:25 | 1.36 |
| SC3-8   | JUNCTION | 0.03 | 1.64 | 248.84 | 0 12:20 | 1.62 |
| SC3-80  | JUNCTION | 0.04 | 1.22 | 553.42 | 0 12:25 | 1.21 |
| SC3-81  | JUNCTION | 0.04 | 1.45 | 533.65 | 0 12:30 | 1.45 |
| SC3-82  | JUNCTION | 0.02 | 1.16 | 563.36 | 0 12:20 | 1.15 |
| SC3-88  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-89  | JUNCTION | 0.01 | 0.61 | 375.81 | 0 12:20 | 0.61 |
| SC3-9   | JUNCTION | 0.00 | 0.00 | 139.20 | 0 00:00 | 0.00 |
| SCE-1   | JUNCTION | 0.00 | 0.00 | 266.00 | 0 00:00 | 0.00 |
| SCE-10  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-11  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-13  | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-14  | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-15  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SCE-2   | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-3   | JUNCTION | 0.00 | 0.00 | 230.00 | 0 00:00 | 0.00 |
| SCE-4   | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-5   | JUNCTION | 0.00 | 0.00 | 128.90 | 0 00:00 | 0.00 |

|                 |          |      |      |        |   |       |      |
|-----------------|----------|------|------|--------|---|-------|------|
| SCE-6           | JUNCTION | 0.00 | 0.00 | 128.90 | 0 | 00:00 | 0.00 |
| SCE-7           | JUNCTION | 0.00 | 0.00 | 98.00  | 0 | 00:00 | 0.00 |
| SCE-8           | JUNCTION | 0.00 | 0.00 | 60.50  | 0 | 00:00 | 0.00 |
| SCE-9           | JUNCTION | 0.00 | 0.00 | 60.50  | 0 | 00:00 | 0.00 |
| SC3-12B         | JUNCTION | 0.00 | 0.00 | 157.20 | 0 | 00:00 | 0.00 |
| SC3-13A         | JUNCTION | 0.00 | 0.00 | 118.60 | 0 | 00:00 | 0.00 |
| SC3_OUTFALL     | OUTFALL  | 0.00 | 0.00 | 0.00   | 0 | 00:00 | 0.00 |
| SCE_OUTFALL     | OUTFALL  | 0.97 | 1.00 | 1.00   | 0 | 02:34 | 1.00 |
| FSD05           | STORAGE  | 3.07 | 5.58 | 27.78  | 0 | 13:34 | 5.58 |
| FSD06           | STORAGE  | 5.18 | 8.19 | 71.39  | 0 | 12:41 | 8.19 |
| FSD09           | STORAGE  | 2.42 | 6.78 | 145.98 | 0 | 13:01 | 6.78 |
| FSD1            | STORAGE  | 1.72 | 2.62 | 2.62   | 0 | 12:44 | 2.62 |
| FSD11B          | STORAGE  | 2.97 | 5.74 | 103.94 | 0 | 12:32 | 5.74 |
| FSD12           | STORAGE  | 4.32 | 5.90 | 162.90 | 0 | 12:23 | 5.90 |
| FSD13           | STORAGE  | 3.24 | 6.44 | 124.94 | 0 | 12:29 | 6.44 |
| FSD14A          | STORAGE  | 1.69 | 3.85 | 122.25 | 0 | 12:45 | 3.85 |
| FSD14B          | STORAGE  | 3.47 | 6.78 | 190.98 | 0 | 12:50 | 6.78 |
| FSD15B          | STORAGE  | 2.41 | 6.16 | 205.36 | 0 | 13:38 | 6.16 |
| FSD16A          | STORAGE  | 4.22 | 8.35 | 232.55 | 0 | 12:38 | 8.34 |
| FSD16B          | STORAGE  | 4.38 | 6.18 | 230.38 | 0 | 12:48 | 6.18 |
| FSD17A          | STORAGE  | 2.97 | 4.68 | 234.88 | 0 | 12:47 | 4.68 |
| FSD17B          | STORAGE  | 2.43 | 6.01 | 264.21 | 0 | 12:30 | 6.01 |
| FSD18           | STORAGE  | 2.70 | 5.13 | 208.33 | 0 | 12:50 | 5.13 |
| FSD20           | STORAGE  | 0.03 | 1.17 | 325.37 | 0 | 12:23 | 1.17 |
| FSD21           | STORAGE  | 0.71 | 3.14 | 335.34 | 0 | 12:37 | 3.14 |
| FSD22           | STORAGE  | 1.53 | 4.42 | 287.62 | 0 | 12:45 | 4.42 |
| FSD23           | STORAGE  | 0.76 | 3.13 | 299.13 | 0 | 12:34 | 3.13 |
| FSD27           | STORAGE  | 3.35 | 6.64 | 263.84 | 0 | 13:03 | 6.64 |
| FSD72           | STORAGE  | 1.35 | 4.59 | 344.79 | 0 | 12:37 | 4.59 |
| FSDE1           | STORAGE  | 2.98 | 5.51 | 271.51 | 0 | 15:08 | 5.51 |
| FSDE2           | STORAGE  | 0.70 | 4.78 | 234.78 | 0 | 14:40 | 4.78 |
| FSDE3           | STORAGE  | 3.06 | 6.47 | 135.37 | 0 | 13:17 | 6.47 |
| FSDE4           | STORAGE  | 2.39 | 4.42 | 102.42 | 0 | 13:55 | 4.42 |
| FSDE5           | STORAGE  | 3.44 | 6.84 | 67.34  | 0 | 14:39 | 6.84 |
| PNDE7           | STORAGE  | 0.57 | 2.71 | 35.21  | 0 | 13:43 | 2.71 |
| FSDE6           | STORAGE  | 3.26 | 5.67 | 38.17  | 0 | 13:56 | 5.67 |
| PNDW3           | STORAGE  | 0.22 | 4.78 | 123.08 | 0 | 13:57 | 4.77 |
| EX_STOCK_POND_1 | STORAGE  | 6.78 | 9.79 | 151.79 | 0 | 13:34 | 9.78 |
| FSD12A          | STORAGE  | 4.27 | 6.98 | 163.98 | 0 | 12:34 | 6.98 |
| EX_STOCK_POND_2 | STORAGE  | 3.23 | 5.60 | 234.70 | 0 | 13:01 | 5.60 |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum    |                    | Lateral Inflow Volume | Total Inflow Volume | Flow Balance Error |
|-------|----------|------------|--------------------|-----------------------|---------------------|--------------------|
|       |          | Inflow CFS | Time of Occurrence |                       |                     |                    |
| 79    | JUNCTION | 0.00       | 18.60              | 0                     | 0.596               | 0.000              |
| 80    | JUNCTION | 0.00       | 13.47              | 0                     | 0.463               | 0.000              |
| 81    | JUNCTION | 0.00       | 781.80             | 0                     | 30.1                | -0.000             |
| DP-1E | JUNCTION | 0.00       | 43.32              | 0                     | 2.52                | 0.000              |
| DP-21 | JUNCTION | 0.00       | 175.84             | 0                     | 13                  | 0.000              |

|               |          |        |        |   |       |       |       |           |
|---------------|----------|--------|--------|---|-------|-------|-------|-----------|
| DP-22         | JUNCTION | 0.00   | 156.50 | 0 | 12:40 | 0     | 10.3  | 0.000     |
| DP-25         | JUNCTION | 0.00   | 17.20  | 0 | 12:15 | 0     | 0.282 | 0.000     |
| DP-26         | JUNCTION | 0.00   | 19.80  | 0 | 13:38 | 0     | 2.29  | 0.000     |
| DP-2E         | JUNCTION | 0.00   | 82.03  | 0 | 12:27 | 0     | 5.62  | 0.000     |
| DP-3E         | JUNCTION | 0.00   | 88.92  | 0 | 12:34 | 0     | 10.6  | 0.000     |
| DP-4E         | JUNCTION | 0.00   | 93.94  | 0 | 12:34 | 0     | 13.8  | 0.000     |
| DP-53A        | JUNCTION | 0.00   | 772.23 | 0 | 14:02 | 0     | 80.2  | 0.000     |
| DP-56         | JUNCTION | 0.00   | 68.58  | 0 | 13:43 | 0     | 19.6  | 0.000     |
| DP-60A        | JUNCTION | 0.00   | 769.88 | 0 | 14:02 | 0     | 79.8  | 0.000     |
| DP-61         | JUNCTION | 0.00   | 758.60 | 0 | 13:57 | 0     | 74.2  | 0.000     |
| DP-63         | JUNCTION | 0.00   | 684.34 | 0 | 13:57 | 0     | 59.5  | 0.000     |
| DP-64         | JUNCTION | 0.00   | 170.56 | 0 | 12:15 | 0     | 4.08  | 0.000     |
| DP-68         | JUNCTION | 0.00   | 897.95 | 0 | 13:33 | 0     | 55.7  | 0.000     |
| DP-69         | JUNCTION | 0.00   | 855.08 | 0 | 13:03 | 0     | 34.6  | 0.000     |
| DP-70         | JUNCTION | 0.00   | 783.11 | 0 | 12:59 | 0     | 31.6  | 0.000     |
| DP-71         | JUNCTION | 0.00   | 773.89 | 0 | 12:56 | 0     | 30.4  | 0.000     |
| DP-72         | JUNCTION | 0.00   | 718.24 | 0 | 12:54 | 0     | 26.3  | 0.000     |
| DP-73         | JUNCTION | 0.00   | 703.56 | 0 | 12:52 | 0     | 25.6  | 0.000     |
| DP-74         | JUNCTION | 0.00   | 145.74 | 0 | 12:29 | 0     | 3.77  | 0.000     |
| DP-75         | JUNCTION | 0.00   | 427.98 | 0 | 12:39 | 0     | 14.2  | 0.000     |
| DP-77         | JUNCTION | 0.00   | 672.84 | 0 | 12:47 | 0     | 23.8  | 0.000     |
| DP-78         | JUNCTION | 0.00   | 210.37 | 0 | 12:30 | 0     | 5.67  | 0.000     |
| DP-8          | JUNCTION | 0.00   | 72.24  | 0 | 13:30 | 0     | 20.5  | 0.001     |
| DP-87         | JUNCTION | 0.00   | 884.92 | 0 | 13:09 | 0     | 39.9  | 0.000     |
| FSD9_OUTLET   | JUNCTION | 0.00   | 108.63 | 0 | 13:01 | 0     | 5.59  | 0.000     |
| FSDE1_Outlet  | JUNCTION | 0.00   | 2.96   | 0 | 15:08 | 0     | 0.926 | 0.000     |
| FSDE2_Outlet  | JUNCTION | 0.00   | 5.77   | 0 | 14:40 | 0     | 1.46  | 0.000     |
| FSDE4_Outlet  | JUNCTION | 0.00   | 2.76   | 0 | 13:55 | 0     | 1.48  | 0.000     |
| PNDW3_Outfall | JUNCTION | 0.00   | 0.00   | 0 | 00:00 | 0     | 0     | 0.000 gal |
| SC3-10        | JUNCTION | 23.62  | 23.62  | 0 | 12:20 | 0.49  | 0.49  | 0.000     |
| SC3-11A       | JUNCTION | 8.05   | 8.05   | 0 | 12:15 | 0.116 | 0.116 | 0.000     |
| SC3-11B       | JUNCTION | 148.27 | 148.27 | 0 | 12:15 | 4.11  | 4.11  | 0.000     |
| SC3-12        | JUNCTION | 91.34  | 91.34  | 0 | 12:15 | 2.6   | 2.6   | 0.000     |
| SC3-12A       | JUNCTION | 31.22  | 31.22  | 0 | 12:15 | 0.651 | 0.651 | 0.000     |
| SC3-13        | JUNCTION | 100.72 | 100.72 | 0 | 12:15 | 2.19  | 2.19  | 0.000     |
| SC3-14A       | JUNCTION | 260.35 | 260.35 | 0 | 12:15 | 7.08  | 7.08  | 0.000     |
| SC3-14B       | JUNCTION | 139.54 | 139.54 | 0 | 12:15 | 3.48  | 3.48  | 0.000     |
| SC3-15A       | JUNCTION | 59.28  | 59.28  | 0 | 12:25 | 1.9   | 1.9   | 0.000     |
| SC3-15B       | JUNCTION | 15.45  | 15.45  | 0 | 12:15 | 0.391 | 0.391 | 0.000     |
| SC3-16A       | JUNCTION | 371.39 | 371.39 | 0 | 12:15 | 10    | 10    | 0.000     |
| SC3-16B       | JUNCTION | 103.49 | 103.49 | 0 | 12:15 | 3.1   | 3.1   | 0.000     |
| SC3-17A       | JUNCTION | 54.03  | 54.03  | 0 | 12:15 | 1.23  | 1.23  | 0.000     |
| SC3-17B       | JUNCTION | 63.50  | 63.50  | 0 | 12:15 | 1.54  | 1.54  | 0.000     |
| SC3-18        | JUNCTION | 41.34  | 41.34  | 0 | 12:15 | 1.2   | 1.2   | 0.000     |
| SC3-18B       | JUNCTION | 6.89   | 6.89   | 0 | 12:20 | 0.285 | 0.285 | 0.000     |
| SC3-19        | JUNCTION | 120.84 | 120.84 | 0 | 12:25 | 3.03  | 3.03  | 0.000     |
| SC3-1A        | JUNCTION | 44.63  | 44.63  | 0 | 12:15 | 0.748 | 0.748 | 0.000     |
| SC3-20        | JUNCTION | 30.73  | 30.73  | 0 | 12:15 | 0.662 | 0.662 | 0.000     |
| SC3-21        | JUNCTION | 29.45  | 29.45  | 0 | 12:15 | 0.463 | 0.463 | 0.000     |
| SC3-22        | JUNCTION | 24.05  | 24.05  | 0 | 12:15 | 0.516 | 0.516 | 0.000     |
| SC3-23        | JUNCTION | 31.23  | 31.23  | 0 | 12:15 | 0.597 | 0.597 | 0.000     |
| SC3-24A       | JUNCTION | 22.51  | 22.51  | 0 | 12:20 | 0.612 | 0.612 | 0.000     |
| SC3-24B       | JUNCTION | 7.12   | 7.12   | 0 | 12:15 | 0.177 | 0.177 | 0.000     |
| SC3-25        | JUNCTION | 17.20  | 17.20  | 0 | 12:15 | 0.282 | 0.282 | 0.000     |
| SC3-26        | JUNCTION | 6.61   | 6.61   | 0 | 12:20 | 0.199 | 0.199 | 0.000     |
| SC3-27        | JUNCTION | 39.10  | 39.10  | 0 | 12:20 | 1.5   | 1.5   | 0.000     |
| SC3-5A        | JUNCTION | 95.88  | 95.88  | 0 | 12:15 | 1.88  | 1.88  | 0.000     |

|             |          |        |        |   |       |        |        |        |
|-------------|----------|--------|--------|---|-------|--------|--------|--------|
| SC3-5B      | JUNCTION | 126.36 | 126.36 | 0 | 12:15 | 2.82   | 2.82   | 0.000  |
| SC3-61      | JUNCTION | 36.40  | 36.40  | 0 | 12:20 | 0.946  | 0.946  | 0.000  |
| SC3-6A      | JUNCTION | 106.32 | 106.32 | 0 | 12:15 | 2.76   | 2.76   | 0.000  |
| SC3-6B      | JUNCTION | 63.88  | 63.88  | 0 | 12:15 | 1.45   | 1.45   | 0.000  |
| SC3-6C      | JUNCTION | 115.61 | 115.61 | 0 | 12:15 | 2.34   | 2.34   | 0.000  |
| SC3-7       | JUNCTION | 109.28 | 109.28 | 0 | 12:15 | 2.63   | 2.63   | 0.000  |
| SC3-72      | JUNCTION | 35.61  | 35.61  | 0 | 12:20 | 0.917  | 0.917  | 0.000  |
| SC3-73      | JUNCTION | 50.14  | 50.14  | 0 | 12:25 | 1.38   | 1.38   | 0.000  |
| SC3-74      | JUNCTION | 79.10  | 79.10  | 0 | 12:20 | 2.04   | 2.04   | 0.000  |
| SC3-75      | JUNCTION | 38.98  | 38.98  | 0 | 12:25 | 1.35   | 1.35   | 0.000  |
| SC3-76      | JUNCTION | 40.54  | 40.54  | 0 | 12:25 | 1.41   | 1.41   | 0.000  |
| SC3-77      | JUNCTION | 42.16  | 42.16  | 0 | 12:30 | 1.55   | 1.55   | 0.000  |
| SC3-78      | JUNCTION | 114.83 | 114.83 | 0 | 12:20 | 2.65   | 2.65   | 0.000  |
| SC3-79      | JUNCTION | 123.52 | 123.52 | 0 | 12:25 | 3.01   | 3.01   | 0.000  |
| SC3-8       | JUNCTION | 93.96  | 93.96  | 0 | 12:20 | 1.88   | 1.88   | 0.000  |
| SC3-80      | JUNCTION | 86.09  | 86.09  | 0 | 12:25 | 2.36   | 2.36   | 0.000  |
| SC3-81      | JUNCTION | 125.85 | 125.85 | 0 | 12:30 | 3.81   | 3.81   | 0.000  |
| SC3-82      | JUNCTION | 79.48  | 79.48  | 0 | 12:20 | 1.7    | 1.7    | -0.000 |
| SC3-88      | JUNCTION | 29.44  | 29.44  | 0 | 12:25 | 0.871  | 0.871  | 0.000  |
| SC3-89      | JUNCTION | 13.39  | 13.39  | 0 | 12:20 | 0.336  | 0.336  | 0.000  |
| SC3-9       | JUNCTION | 114.01 | 114.01 | 0 | 12:25 | 3.64   | 3.64   | 0.000  |
| SCE-1       | JUNCTION | 30.85  | 30.85  | 0 | 12:25 | 1.21   | 1.21   | 0.000  |
| SCE-10      | JUNCTION | 232.98 | 232.98 | 0 | 12:15 | 6.1    | 6.1    | 0.000  |
| SCE-11      | JUNCTION | 4.75   | 4.75   | 0 | 12:15 | 0.0668 | 0.0668 | 0.000  |
| SCE-13      | JUNCTION | 38.21  | 38.21  | 0 | 12:25 | 1.34   | 1.34   | 0.000  |
| SCE-14      | JUNCTION | 28.21  | 28.21  | 0 | 12:20 | 0.895  | 0.895  | 0.000  |
| SCE-15      | JUNCTION | 38.53  | 38.53  | 0 | 12:15 | 0.872  | 0.872  | 0.000  |
| SCE-2       | JUNCTION | 4.95   | 4.95   | 0 | 12:20 | 0.256  | 0.256  | 0.000  |
| SCE-3       | JUNCTION | 28.62  | 28.62  | 0 | 12:25 | 1.46   | 1.46   | 0.000  |
| SCE-4       | JUNCTION | 10.35  | 10.35  | 0 | 12:30 | 0.742  | 0.742  | 0.000  |
| SCE-5       | JUNCTION | 168.48 | 168.48 | 0 | 12:15 | 5.27   | 5.27   | 0.000  |
| SCE-6       | JUNCTION | 1.03   | 1.03   | 0 | 12:20 | 0.0497 | 0.0497 | 0.000  |
| SCE-7       | JUNCTION | 67.52  | 67.52  | 0 | 12:15 | 1.64   | 1.64   | 0.000  |
| SCE-8       | JUNCTION | 73.41  | 73.41  | 0 | 12:15 | 1.84   | 1.84   | 0.000  |
| SCE-9       | JUNCTION | 1.27   | 1.27   | 0 | 12:20 | 0.0496 | 0.0496 | 0.000  |
| SC3-12B     | JUNCTION | 6.23   | 6.23   | 0 | 12:20 | 0.245  | 0.245  | 0.000  |
| SC3-13A     | JUNCTION | 11.81  | 11.81  | 0 | 12:20 | 0.415  | 0.415  | 0.000  |
| SC3_OUTFALL | OUTFALL  | 0.00   | 772.23 | 0 | 14:02 | 0      | 80.2   | 0.000  |
| SCE_OUTFALL | OUTFALL  | 0.00   | 0.08   | 0 | 02:33 | 0      | 0.149  | 0.000  |
| FSD05       | STORAGE  | 0.00   | 95.88  | 0 | 12:15 | 0      | 1.88   | 0.006  |
| FSD06       | STORAGE  | 0.00   | 392.42 | 0 | 12:16 | 0      | 9.29   | 0.077  |
| FSD09       | STORAGE  | 0.00   | 184.19 | 0 | 12:31 | 0      | 5.6    | 0.109  |
| FSD1        | STORAGE  | 0.00   | 44.63  | 0 | 12:15 | 0      | 0.748  | 0.099  |
| FSD11B      | STORAGE  | 0.00   | 148.27 | 0 | 12:15 | 0      | 4.11   | 0.078  |
| FSD12       | STORAGE  | 0.00   | 91.34  | 0 | 12:15 | 0      | 2.6    | 0.115  |
| FSD13       | STORAGE  | 0.00   | 100.72 | 0 | 12:15 | 0      | 2.19   | 0.093  |
| FSD14A      | STORAGE  | 0.00   | 260.35 | 0 | 12:15 | 0      | 7.08   | 0.080  |
| FSD14B      | STORAGE  | 0.00   | 139.54 | 0 | 12:15 | 0      | 3.48   | 0.044  |
| FSD15B      | STORAGE  | 0.00   | 69.20  | 0 | 12:25 | 0      | 2.29   | 0.072  |
| FSD16A      | STORAGE  | 0.00   | 371.39 | 0 | 12:15 | 0      | 10     | 0.052  |
| FSD16B      | STORAGE  | 0.00   | 103.49 | 0 | 12:15 | 0      | 3.1    | 0.064  |
| FSD17A      | STORAGE  | 0.00   | 54.03  | 0 | 12:15 | 0      | 1.23   | 0.066  |
| FSD17B      | STORAGE  | 0.00   | 63.50  | 0 | 12:15 | 0      | 1.54   | 0.092  |
| FSD18       | STORAGE  | 0.00   | 41.34  | 0 | 12:15 | 0      | 1.2    | 0.078  |
| FSD20       | STORAGE  | 0.00   | 30.73  | 0 | 12:15 | 0      | 0.662  | 0.208  |
| FSD21       | STORAGE  | 0.00   | 29.45  | 0 | 12:15 | 0      | 0.463  | 0.144  |
| FSD22       | STORAGE  | 0.00   | 24.05  | 0 | 12:15 | 0      | 0.516  | 0.184  |



|                 |         |      |        |   |       |   |       |       |
|-----------------|---------|------|--------|---|-------|---|-------|-------|
| FSD23           | STORAGE | 0.00 | 31.23  | 0 | 12:15 | 0 | 0.597 | 0.142 |
| FSD27           | STORAGE | 0.00 | 68.86  | 0 | 12:25 | 0 | 2.37  | 0.127 |
| FSD72           | STORAGE | 0.00 | 35.61  | 0 | 12:20 | 0 | 0.917 | 0.179 |
| FSDE1           | STORAGE | 0.00 | 30.85  | 0 | 12:25 | 0 | 1.21  | 0.007 |
| FSDE2           | STORAGE | 0.00 | 28.62  | 0 | 12:25 | 0 | 1.46  | 0.028 |
| FSDE3           | STORAGE | 0.00 | 168.48 | 0 | 12:15 | 0 | 5.27  | 0.021 |
| FSDE4           | STORAGE | 0.00 | 67.52  | 0 | 12:15 | 0 | 1.64  | 0.010 |
| FSDE5           | STORAGE | 0.00 | 73.41  | 0 | 12:15 | 0 | 1.84  | 0.005 |
| PNDE7           | STORAGE | 0.00 | 103.63 | 0 | 12:36 | 0 | 19.6  | 0.024 |
| FSDE6           | STORAGE | 0.00 | 232.98 | 0 | 12:15 | 0 | 6.1   | 0.011 |
| PNDW3           | STORAGE | 0.00 | 897.95 | 0 | 13:33 | 0 | 55.7  | 0.561 |
| EX_STOCK_POND_1 | STORAGE | 0.00 | 860.40 | 0 | 13:18 | 0 | 39.9  | 0.127 |
| FSD12A          | STORAGE | 0.00 | 31.22  | 0 | 12:15 | 0 | 0.651 | 0.093 |
| EX_STOCK_POND_2 | STORAGE | 0.00 | 783.11 | 0 | 12:59 | 0 | 31.6  | 0.138 |

\*\*\*\*\*  
Node Flooding Summary  
\*\*\*\*\*

Flooding refers to all water that overflows a node, whether it ponds or not.

| -----  |                       |                  |                                    |                       |                        |
|--------|-----------------------|------------------|------------------------------------|-----------------------|------------------------|
| Node   | Total Maximum         |                  |                                    |                       |                        |
|        | Maximum Hours Flooded | Maximum Rate CFS | Time of Max Occurrence days hr:min | Flood Volume 10^6 gal | Ponded Volume 1000 ft3 |
| DP-8   | 75.91                 | 72.16            | 0 13:30                            | 20.349                | 0.000                  |
| SC3-19 | 0.31                  | 20.89            | 0 12:26                            | 0.104                 | 0.000                  |

\*\*\*\*\*  
Storage Volume Summary  
\*\*\*\*\*

| -----        |                |               |            |                |          |                        |                 |  |
|--------------|----------------|---------------|------------|----------------|----------|------------------------|-----------------|--|
| Storage Unit | Average Volume | Avg Evap Pcnt | Exfil Pcnt | Maximum Volume | Max Pcnt | Time of Max Occurrence | Maximum Outflow |  |
|              | 1000 ft3       | Full          | Loss       | 1000 ft3       | Full     | days hr:min            | CFS             |  |
| FSD05        | 38.500         | 9             | 0 0        | 172.162        | 42       | 0 13:33                | 3.70            |  |
| FSD06        | 304.478        | 25            | 0 0        | 744.911        | 62       | 0 12:41                | 99.67           |  |
| FSD09        | 58.020         | 8             | 0 0        | 316.857        | 44       | 0 13:01                | 108.63          |  |
| FSD1         | 39.114         | 11            | 0 0        | 68.358         | 19       | 0 12:44                | 9.58            |  |
| FSD11B       | 63.590         | 15            | 0 0        | 203.029        | 47       | 0 12:32                | 77.00           |  |
| FSD12        | 58.226         | 23            | 0 0        | 103.010        | 41       | 0 12:23                | 75.10           |  |
| FSD13        | 40.502         | 12            | 0 0        | 146.254        | 42       | 0 12:29                | 41.57           |  |
| FSD14A       | 194.459        | 12            | 0 0        | 554.769        | 35       | 0 12:45                | 72.60           |  |
| FSD14B       | 112.082        | 22            | 0 0        | 292.277        | 57       | 0 12:50                | 19.30           |  |
| FSD15B       | 40.489         | 7             | 0 0        | 184.581        | 33       | 0 13:38                | 19.80           |  |
| FSD16A       | 266.596        | 23            | 0 0        | 688.284        | 59       | 0 12:38                | 128.30          |  |
| FSD16B       | 159.533        | 31            | 0 0        | 255.176        | 50       | 0 12:47                | 28.20           |  |
| FSD17A       | 26.316         | 5             | 0 0        | 99.965         | 17       | 0 12:47                | 12.05           |  |
| FSD17B       | 18.296         | 10            | 0 0        | 91.232         | 51       | 0 12:30                | 31.43           |  |
| FSD18        | 29.300         | 13            | 0 0        | 92.939         | 40       | 0 12:49                | 12.12           |  |
| FSD20        | 0.065          | 0             | 0 0        | 6.293          | 5        | 0 12:23                | 28.77           |  |
| FSD21        | 4.196          | 3             | 0 0        | 27.986         | 21       | 0 12:36                | 13.47           |  |

|                 |         |    |   |   |          |    |   |       |        |
|-----------------|---------|----|---|---|----------|----|---|-------|--------|
| FSD22           | 5.810   | 6  | 0 | 0 | 32.024   | 32 | 0 | 12:44 | 12.48  |
| FSD23           | 4.012   | 3  | 0 | 0 | 26.434   | 20 | 0 | 12:33 | 18.60  |
| FSD27           | 43.642  | 14 | 0 | 0 | 145.738  | 48 | 0 | 13:03 | 37.61  |
| FSD72           | 10.644  | 8  | 0 | 0 | 47.987   | 36 | 0 | 12:37 | 28.06  |
| FSDE1           | 63.250  | 22 | 0 | 0 | 139.036  | 49 | 0 | 15:08 | 2.96   |
| FSDE2           | 12.850  | 5  | 0 | 0 | 113.740  | 40 | 0 | 14:39 | 5.77   |
| FSDE3           | 165.952 | 22 | 0 | 0 | 481.875  | 63 | 0 | 13:17 | 16.21  |
| FSDE4           | 62.104  | 12 | 0 | 0 | 156.366  | 30 | 0 | 13:55 | 2.76   |
| FSDE5           | 73.745  | 28 | 0 | 0 | 176.545  | 67 | 0 | 14:39 | 2.29   |
| PNDE7           | 14.220  | 1  | 0 | 0 | 182.764  | 11 | 0 | 13:43 | 68.58  |
| FSDE6           | 204.601 | 16 | 0 | 0 | 600.645  | 48 | 0 | 13:56 | 9.67   |
| PNDW3           | 10.696  | 0  | 0 | 0 | 617.891  | 24 | 0 | 13:56 | 676.70 |
| EX_STOCK_POND_1 | 735.494 | 43 | 0 | 0 | 1229.238 | 73 | 0 | 13:34 | 744.94 |
| FSD12A          | 19.798  | 22 | 0 | 0 | 47.404   | 52 | 0 | 12:33 | 13.09  |
| EX_STOCK_POND_2 | 159.164 | 40 | 0 | 0 | 294.792  | 74 | 0 | 13:01 | 781.80 |

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq | Avg Flow Pcnt | Max Flow CFS | Total Volume CFS | 10^6 gal |
|--------------|-----------|---------------|--------------|------------------|----------|
| SC3_OUTFALL  | 97.81     | 39.05         | 772.23       | 80.229           |          |
| SCE_OUTFALL  | 97.28     | 0.07          | 0.08         | 0.149            |          |
| System       | 97.54     | 39.13         | 772.31       | 80.378           |          |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow  CFS | Time of Occurrence days | Max  Veloc  ft/sec | Maximum Full Flow | Max/ Full Flow | Max/ Full Depth |
|--------|---------|--------------------|-------------------------|--------------------|-------------------|----------------|-----------------|
| RT-1   | CONDUIT | 114.92             | 0 12:44                 | 4.39               | 0.00              | 0.07           |                 |
| RT-10A | CONDUIT | 107.82             | 0 12:30                 | 6.22               | 1.08              | 0.96           |                 |
| RT-10B | CONDUIT | 19.79              | 0 13:40                 | 10.28              | 0.05              | 0.15           |                 |
| RT-11A | CONDUIT | 780.22             | 0 13:03                 | 6.58               | 0.01              | 0.13           |                 |
| RT-11B | CONDUIT | 840.25             | 0 13:09                 | 6.18               | 0.02              | 0.14           |                 |
| RT-11C | CONDUIT | 860.40             | 0 13:18                 | 4.30               | 0.02              | 0.17           |                 |
| RT-12A | CONDUIT | 156.54             | 0 12:57                 | 17.13              | 0.82              | 0.69           |                 |
| RT-12B | CONDUIT | 175.83             | 0 12:58                 | 22.70              | 0.48              | 0.49           |                 |
| RT-16  | CONDUIT | 104.49             | 0 12:16                 | 16.11              | 0.75              | 0.64           |                 |
| RT-17B | CONDUIT | 108.36             | 0 13:05                 | 17.22              | 0.50              | 0.50           |                 |
| RT-18  | CONDUIT | 757.36             | 0 14:02                 | 5.83               | 0.01              | 0.12           |                 |
| RT-19  | CONDUIT | 35.79              | 0 12:23                 | 7.17               | 0.12              | 0.23           |                 |
| RT-1E  | CONDUIT | 2.96               | 0 15:09                 | 4.18               | 0.02              | 0.11           |                 |
| RT-2   | CONDUIT | 72.69              | 0 12:42                 | 4.01               | 0.00              | 0.06           |                 |
| RT-20  | CONDUIT | 769.84             | 0 14:02                 | 8.87               | 0.01              | 0.09           |                 |
| RT-21  | CONDUIT | 15.61              | 0 12:21                 | 10.48              | 0.10              | 0.22           |                 |

|        |         |        |   |       |       |      |      |
|--------|---------|--------|---|-------|-------|------|------|
| RT-22  | CONDUIT | 18.64  | 0 | 12:39 | 13.37 | 0.20 | 0.31 |
| RT-2E  | CONDUIT | 42.87  | 0 | 12:28 | 9.43  | 0.32 | 0.39 |
| RT-3   | CONDUIT | 73.10  | 0 | 12:31 | 4.01  | 0.00 | 0.06 |
| RT-3E  | CONDUIT | 5.77   | 0 | 14:40 | 5.51  | 0.04 | 0.14 |
| RT-4   | CONDUIT | 138.04 | 0 | 12:37 | 4.44  | 0.00 | 0.08 |
| RT-4E  | CONDUIT | 81.40  | 0 | 12:32 | 11.70 | 0.58 | 0.55 |
| RT-5   | CONDUIT | 413.17 | 0 | 12:48 | 6.32  | 0.01 | 0.13 |
| RT-5E  | CONDUIT | 88.91  | 0 | 12:34 | 15.73 | 0.24 | 0.33 |
| RT-6   | CONDUIT | 114.62 | 0 | 12:33 | 4.80  | 0.00 | 0.07 |
| RT-6B  | CONDUIT | 175.57 | 0 | 12:49 | 4.63  | 0.00 | 0.09 |
| RT-6E  | CONDUIT | 2.76   | 0 | 13:59 | 4.46  | 0.02 | 0.10 |
| RT-7A  | CONDUIT | 13.31  | 0 | 12:21 | 11.03 | 0.05 | 0.15 |
| RT-7E  | CONDUIT | 93.85  | 0 | 12:36 | 10.92 | 0.25 | 0.34 |
| RT-8   | CONDUIT | 28.76  | 0 | 12:24 | 15.02 | 0.65 | 0.59 |
| RT-9A  | CONDUIT | 664.66 | 0 | 12:53 | 5.75  | 0.01 | 0.13 |
| RT-9B  | CONDUIT | 703.19 | 0 | 12:54 | 6.59  | 0.01 | 0.12 |
| RT-9C  | CONDUIT | 716.35 | 0 | 12:57 | 6.15  | 0.01 | 0.13 |
| RT-9D  | CONDUIT | 771.84 | 0 | 12:59 | 6.39  | 0.01 | 0.13 |
| RT-14  | CONDUIT | 683.78 | 0 | 14:00 | 6.02  | 0.01 | 0.11 |
| 1      | DUMMY   | 79.10  | 0 | 12:20 |       |      |      |
| 2      | DUMMY   | 50.14  | 0 | 12:25 |       |      |      |
| 3      | DUMMY   | 38.98  | 0 | 12:25 |       |      |      |
| 4      | DUMMY   | 40.54  | 0 | 12:25 |       |      |      |
| 5      | DUMMY   | 114.83 | 0 | 12:20 |       |      |      |
| 6      | DUMMY   | 35.61  | 0 | 12:20 |       |      |      |
| 7      | DUMMY   | 42.16  | 0 | 12:30 |       |      |      |
| 8      | DUMMY   | 29.44  | 0 | 12:25 |       |      |      |
| 9      | DUMMY   | 30.85  | 0 | 12:25 |       |      |      |
| 10     | DUMMY   | 4.95   | 0 | 12:20 |       |      |      |
| 11     | DUMMY   | 6.61   | 0 | 12:20 |       |      |      |
| 12     | DUMMY   | 39.10  | 0 | 12:20 |       |      |      |
| 13     | DUMMY   | 31.23  | 0 | 12:15 |       |      |      |
| 14     | DUMMY   | 29.45  | 0 | 12:15 |       |      |      |
| 15     | DUMMY   | 17.20  | 0 | 12:15 |       |      |      |
| 16     | DUMMY   | 7.12   | 0 | 12:15 |       |      |      |
| 17     | DUMMY   | 24.05  | 0 | 12:15 |       |      |      |
| 18     | DUMMY   | 63.50  | 0 | 12:15 |       |      |      |
| 20     | DUMMY   | 30.73  | 0 | 12:15 |       |      |      |
| 22     | DUMMY   | 139.54 | 0 | 12:15 |       |      |      |
| 24     | DUMMY   | 260.35 | 0 | 12:15 |       |      |      |
| 25     | DUMMY   | 100.72 | 0 | 12:15 |       |      |      |
| 27     | DUMMY   | 67.52  | 0 | 12:15 |       |      |      |
| 28     | DUMMY   | 73.41  | 0 | 12:15 |       |      |      |
| 29     | DUMMY   | 168.48 | 0 | 12:15 |       |      |      |
| 30     | DUMMY   | 103.49 | 0 | 12:15 |       |      |      |
| 34     | DUMMY   | 41.34  | 0 | 12:15 |       |      |      |
| 36     | DUMMY   | 28.62  | 0 | 12:25 |       |      |      |
| 37     | DUMMY   | 10.35  | 0 | 12:30 |       |      |      |
| 38     | DUMMY   | 114.01 | 0 | 12:25 |       |      |      |
| RT-17A | CONDUIT | 79.25  | 0 | 12:35 | 5.64  | 0.00 | 0.07 |
| 39     | DUMMY   | 59.28  | 0 | 12:25 |       |      |      |
| 40     | DUMMY   | 15.45  | 0 | 12:15 |       |      |      |
| 42     | DUMMY   | 91.34  | 0 | 12:15 |       |      |      |
| 44     | DUMMY   | 4.75   | 0 | 12:15 |       |      |      |
| 45     | DUMMY   | 1.27   | 0 | 12:20 |       |      |      |
| 46     | DUMMY   | 1.03   | 0 | 12:20 |       |      |      |
| 47     | DUMMY   | 28.21  | 0 | 12:20 |       |      |      |

|                         |         |        |   |       |       |      |      |
|-------------------------|---------|--------|---|-------|-------|------|------|
| 48                      | DUMMY   | 38.21  | 0 | 12:25 |       |      |      |
| 51                      | DUMMY   | 232.98 | 0 | 12:15 |       |      |      |
| 54                      | DUMMY   | 148.27 | 0 | 12:15 |       |      |      |
| 56                      | DUMMY   | 8.05   | 0 | 12:15 |       |      |      |
| 58                      | CONDUIT | 897.95 | 0 | 13:33 | 11.39 | 0.01 | 0.08 |
| 63                      | DUMMY   | 95.88  | 0 | 12:15 |       |      |      |
| 65                      | DUMMY   | 44.63  | 0 | 12:15 |       |      |      |
| 67                      | DUMMY   | 772.23 | 0 | 14:02 |       |      |      |
| RT-15A                  | CONDUIT | 108.11 | 0 | 12:16 | 18.40 | 0.46 | 0.48 |
| RT-15B                  | CONDUIT | 169.45 | 0 | 12:16 | 18.61 | 0.28 | 0.36 |
| 69                      | DUMMY   | 115.61 | 0 | 12:15 |       |      |      |
| 70                      | DUMMY   | 63.88  | 0 | 12:15 |       |      |      |
| RT-25                   | CONDUIT | 68.56  | 0 | 13:47 | 4.02  | 0.01 | 0.13 |
| 71                      | CONDUIT | 0.08   | 0 | 02:33 | 0.10  | 1.08 | 1.00 |
| 74                      | DUMMY   | 23.62  | 0 | 12:20 |       |      |      |
| 75                      | DUMMY   | 22.51  | 0 | 12:20 |       |      |      |
| 77                      | DUMMY   | 126.36 | 0 | 12:15 |       |      |      |
| 78                      | DUMMY   | 54.03  | 0 | 12:15 |       |      |      |
| 79                      | DUMMY   | 371.39 | 0 | 12:15 |       |      |      |
| 80                      | CONDUIT | 13.47  | 0 | 12:39 | 16.04 | 0.14 | 0.25 |
| 81                      | DUMMY   | 31.22  | 0 | 12:15 |       |      |      |
| 82                      | DUMMY   | 38.53  | 0 | 12:15 |       |      |      |
| 83                      | DUMMY   | 6.89   | 0 | 12:20 |       |      |      |
| 84                      | DUMMY   | 783.11 | 0 | 12:59 |       |      |      |
| 85                      | DUMMY   | 6.23   | 0 | 12:20 |       |      |      |
| 86                      | DUMMY   | 11.81  | 0 | 12:20 |       |      |      |
| FSD01_Outlet            | DUMMY   | 9.58   | 0 | 12:44 |       |      |      |
| FSD05_Outlet            | DUMMY   | 3.70   | 0 | 12:14 |       |      |      |
| FSD06_Outlet            | DUMMY   | 99.67  | 0 | 12:41 |       |      |      |
| FSD11B_Outlet           | DUMMY   | 77.00  | 0 | 12:10 |       |      |      |
| FSD12_Outlet            | DUMMY   | 75.10  | 0 | 12:23 |       |      |      |
| FSD13_Outlet            | DUMMY   | 41.57  | 0 | 12:29 |       |      |      |
| FSD14A_Outlet           | DUMMY   | 72.60  | 0 | 12:45 |       |      |      |
| FSD14B_Outlet           | DUMMY   | 19.30  | 0 | 12:09 |       |      |      |
| FSD15B_Outlet           | DUMMY   | 19.80  | 0 | 13:38 |       |      |      |
| FSD16A_Outlet           | DUMMY   | 128.30 | 0 | 12:21 |       |      |      |
| FSD16B_Outlet           | DUMMY   | 28.20  | 0 | 12:40 |       |      |      |
| FSD17B_Outlet           | DUMMY   | 31.43  | 0 | 12:30 |       |      |      |
| FSD18_Outlet            | DUMMY   | 12.12  | 0 | 12:50 |       |      |      |
| FSD21_Outlet            | DUMMY   | 13.47  | 0 | 12:37 |       |      |      |
| FSD22_Outlet            | DUMMY   | 12.48  | 0 | 12:45 |       |      |      |
| FSD72_Outlet            | DUMMY   | 28.06  | 0 | 12:37 |       |      |      |
| FSD9_Outlet             | DUMMY   | 108.63 | 0 | 13:01 |       |      |      |
| FSDE2_Outlet            | DUMMY   | 5.77   | 0 | 14:40 |       |      |      |
| FSDE3_Outlet            | DUMMY   | 16.21  | 0 | 13:17 |       |      |      |
| FSDE4_Outlet            | DUMMY   | 2.76   | 0 | 13:55 |       |      |      |
| FSDE5_Outlet            | DUMMY   | 2.29   | 0 | 14:39 |       |      |      |
| FSDE6_Outlet            | DUMMY   | 9.67   | 0 | 13:56 |       |      |      |
| FSDE1_Outlet            | DUMMY   | 2.96   | 0 | 15:08 |       |      |      |
| PNDE7_Outlet            | DUMMY   | 68.58  | 0 | 13:43 |       |      |      |
| FSD17A_Outlet           | DUMMY   | 12.05  | 0 | 12:47 |       |      |      |
| PNDW3_Outlet            | DUMMY   | 676.70 | 0 | 13:57 |       |      |      |
| FSD27_Outlet            | DUMMY   | 37.61  | 0 | 13:03 |       |      |      |
| EX_STOCK_POND_1_OUTFALL | DUMMY   | 744.94 | 0 | 13:34 |       |      |      |
| FSD23_Outlet            | DUMMY   | 18.60  | 0 | 12:29 |       |      |      |
| FSD12A_Outlet           | DUMMY   | 13.09  | 0 | 12:34 |       |      |      |
| EX_STOCK_POND_2_OUTLET  | DUMMY   | 781.80 | 0 | 13:01 |       |      |      |

\*\*\*\*\*  
 Conduit Surcharge Summary  
 \*\*\*\*\*

| Conduit | Hours                            |                   | Hours                           |                   | Capacity<br>Normal Flow | Limited |
|---------|----------------------------------|-------------------|---------------------------------|-------------------|-------------------------|---------|
|         | -----<br>Hours Full<br>Both Ends | -----<br>Upstream | -----<br>Above Full<br>Dnstream | -----<br>Dnstream |                         |         |
| RT-10A  | 0.30                             | 0.30              | 0.30                            | 0.32              | 0.30                    |         |
| 71      | 75.91                            | 75.91             | 75.91                           | 0.03              | 75.91                   |         |

Analysis begun on: Thu Mar 24 10:18:54 2022  
 Analysis ended on: Thu Mar 24 10:18:54 2022  
 Total elapsed time: < 1 sec

Sterling Ranch 2022 MDDP Amendment  
25-YR Type II Storm

**NOTE: These warnings are generated from using 1 foot dummy conduits between basin nodes and detention ponds to ensure there is no additional travel time between the bottom of the basin and the detention pond, except where conveyed by a channel.**

WARNING 04: minimum elevation drop used for Conduit 1  
WARNING 04: minimum elevation drop used for Conduit 2  
WARNING 04: minimum elevation drop used for Conduit 3  
WARNING 04: minimum elevation drop used for Conduit 4  
WARNING 04: minimum elevation drop used for Conduit 5  
WARNING 04: minimum elevation drop used for Conduit 6  
WARNING 04: minimum elevation drop used for Conduit 7  
WARNING 04: minimum elevation drop used for Conduit 8  
WARNING 04: minimum elevation drop used for Conduit 9  
WARNING 04: minimum elevation drop used for Conduit 10  
WARNING 04: minimum elevation drop used for Conduit 11  
WARNING 04: minimum elevation drop used for Conduit 12  
WARNING 04: minimum elevation drop used for Conduit 14  
WARNING 04: minimum elevation drop used for Conduit 15  
WARNING 04: minimum elevation drop used for Conduit 16  
WARNING 04: minimum elevation drop used for Conduit 17  
WARNING 04: minimum elevation drop used for Conduit 18  
WARNING 04: minimum elevation drop used for Conduit 20  
WARNING 04: minimum elevation drop used for Conduit 22  
WARNING 04: minimum elevation drop used for Conduit 27  
WARNING 04: minimum elevation drop used for Conduit 28  
WARNING 04: minimum elevation drop used for Conduit 29  
WARNING 04: minimum elevation drop used for Conduit 30  
WARNING 04: minimum elevation drop used for Conduit 34  
WARNING 04: minimum elevation drop used for Conduit 36  
WARNING 04: minimum elevation drop used for Conduit 37  
WARNING 04: minimum elevation drop used for Conduit 38  
WARNING 04: minimum elevation drop used for Conduit 39  
WARNING 04: minimum elevation drop used for Conduit 40  
WARNING 04: minimum elevation drop used for Conduit 44  
WARNING 04: minimum elevation drop used for Conduit 45  
WARNING 04: minimum elevation drop used for Conduit 46  
WARNING 04: minimum elevation drop used for Conduit 47  
WARNING 04: minimum elevation drop used for Conduit 48  
WARNING 04: minimum elevation drop used for Conduit 51  
WARNING 04: minimum elevation drop used for Conduit 54  
WARNING 08: elevation drop exceeds length for Conduit 56  
WARNING 04: minimum elevation drop used for Conduit 63  
WARNING 04: minimum elevation drop used for Conduit 65  
WARNING 04: minimum elevation drop used for Conduit 67  
WARNING 04: minimum elevation drop used for Conduit 69  
WARNING 04: minimum elevation drop used for Conduit 70  
WARNING 04: minimum elevation drop used for Conduit 71  
WARNING 04: minimum elevation drop used for Conduit 74  
WARNING 04: minimum elevation drop used for Conduit 75  
WARNING 08: elevation drop exceeds length for Conduit 77  
WARNING 04: minimum elevation drop used for Conduit 78  
WARNING 04: minimum elevation drop used for Conduit 79  
WARNING 04: minimum elevation drop used for Conduit 82

WARNING 04: minimum elevation drop used for Conduit 83  
 WARNING 04: minimum elevation drop used for Conduit 85  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12\_Outlet  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12A\_Outlet

\*\*\*\*\*  
 NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.  
 \*\*\*\*\*

\*\*\*\*\*  
 Analysis Options  
 \*\*\*\*\*

Flow Units ..... CFS  
 Process Models:  
 Rainfall/Runoff ..... NO  
 RDII ..... NO  
 Snowmelt ..... NO  
 Groundwater ..... NO  
 Flow Routing ..... YES  
 Ponding Allowed ..... NO  
 Water Quality ..... NO  
 Flow Routing Method ..... KINWAVE  
 Starting Date ..... 01/01/2005 00:00:00  
 Ending Date ..... 01/04/2005 06:00:00  
 Antecedent Dry Days ..... 0.0  
 Report Time Step ..... 00:05:00  
 Routing Time Step ..... 30.00 sec

|                             | Volume    | Volume              |
|-----------------------------|-----------|---------------------|
| Flow Routing Continuity     | acre-feet | 10 <sup>6</sup> gal |
| *****                       | -----     | -----               |
| Dry Weather Inflow .....    | 0.000     | 0.000               |
| Wet Weather Inflow .....    | 0.000     | 0.000               |
| Groundwater Inflow .....    | 0.000     | 0.000               |
| RDII Inflow .....           | 0.000     | 0.000               |
| External Inflow .....       | 425.961   | 138.806             |
| External Outflow .....      | 305.181   | 99.448              |
| Flooding Loss .....         | 75.801    | 24.701              |
| Evaporation Loss .....      | 0.000     | 0.000               |
| Exfiltration Loss .....     | 0.000     | 0.000               |
| Initial Stored Volume ..... | 0.000     | 0.000               |
| Final Stored Volume .....   | 45.960    | 14.977              |
| Continuity Error (%) .....  | -0.230    |                     |

\*\*\*\*\*  
 Highest Flow Instability Indexes  
 \*\*\*\*\*

- Link RT-14 (63)
- Link PNDW3\_Outlet (62)
- Link RT-18 (62)
- Link RT-20 (61)
- Link 67 (61)

\*\*\*\*\*

Routing Time Step Summary

\*\*\*\*\*

Minimum Time Step : 30.00 sec  
Average Time Step : 30.00 sec  
Maximum Time Step : 30.00 sec  
Percent in Steady State : 0.00  
Average Iterations per Step : 1.00  
Percent Not Converging : 0.00

\*\*\*\*\*

Node Depth Summary

\*\*\*\*\*

| Node          | Type     | Average Depth<br>Feet | Maximum Depth<br>Feet | Maximum HGL<br>Feet | Time of Max Occurrence<br>days hr:min | Max Reported<br>Max Depth<br>Feet |
|---------------|----------|-----------------------|-----------------------|---------------------|---------------------------------------|-----------------------------------|
| 79            | JUNCTION | 0.07                  | 0.92                  | 295.92              | 0 12:20                               | 0.92                              |
| 80            | JUNCTION | 0.06                  | 0.81                  | 331.81              | 0 12:31                               | 0.81                              |
| 81            | JUNCTION | 0.13                  | 3.02                  | 232.02              | 0 12:58                               | 3.02                              |
| DP-1E         | JUNCTION | 0.20                  | 1.79                  | 260.69              | 0 12:25                               | 1.79                              |
| DP-21         | JUNCTION | 0.31                  | 2.76                  | 186.96              | 0 13:25                               | 2.76                              |
| DP-22         | JUNCTION | 0.31                  | 2.75                  | 226.95              | 0 12:25                               | 2.75                              |
| DP-25         | JUNCTION | 0.02                  | 0.88                  | 333.08              | 0 12:15                               | 0.87                              |
| DP-26         | JUNCTION | 0.15                  | 0.98                  | 200.18              | 0 13:24                               | 0.98                              |
| DP-2E         | JUNCTION | 0.28                  | 2.55                  | 221.45              | 0 12:27                               | 2.54                              |
| DP-3E         | JUNCTION | 0.34                  | 2.54                  | 131.44              | 0 12:32                               | 2.53                              |
| DP-4E         | JUNCTION | 0.49                  | 2.38                  | 62.88               | 0 12:39                               | 2.38                              |
| DP-53A        | JUNCTION | 0.22                  | 2.06                  | 2.06                | 0 13:55                               | 2.06                              |
| DP-56         | JUNCTION | 0.41                  | 1.39                  | 33.39               | 0 14:01                               | 1.39                              |
| DP-60A        | JUNCTION | 0.30                  | 2.85                  | 25.05               | 0 13:55                               | 2.85                              |
| DP-61         | JUNCTION | 0.30                  | 2.85                  | 66.05               | 0 13:50                               | 2.85                              |
| DP-63         | JUNCTION | 0.24                  | 2.56                  | 100.76              | 0 13:51                               | 2.56                              |
| DP-64         | JUNCTION | 0.11                  | 2.35                  | 95.55               | 0 12:15                               | 2.33                              |
| DP-68         | JUNCTION | 0.28                  | 2.21                  | 120.61              | 0 13:25                               | 2.21                              |
| DP-69         | JUNCTION | 0.20                  | 5.00                  | 208.20              | 0 12:22                               | 5.00                              |
| DP-70         | JUNCTION | 0.14                  | 3.06                  | 232.26              | 0 12:57                               | 3.05                              |
| DP-71         | JUNCTION | 0.14                  | 3.06                  | 260.26              | 0 12:54                               | 3.06                              |
| DP-72         | JUNCTION | 0.11                  | 2.97                  | 286.17              | 0 12:51                               | 2.96                              |
| DP-73         | JUNCTION | 0.13                  | 2.96                  | 303.16              | 0 12:51                               | 2.96                              |
| DP-74         | JUNCTION | 0.05                  | 1.74                  | 498.94              | 0 12:28                               | 1.73                              |
| DP-75         | JUNCTION | 0.09                  | 3.00                  | 435.20              | 0 12:38                               | 2.99                              |
| DP-77         | JUNCTION | 0.10                  | 2.98                  | 343.18              | 0 12:45                               | 2.98                              |
| DP-78         | JUNCTION | 0.06                  | 2.12                  | 464.32              | 0 12:29                               | 2.12                              |
| DP-8          | JUNCTION | 9.76                  | 10.00                 | 10.00               | 0 01:54                               | 10.00                             |
| DP-87         | JUNCTION | 0.24                  | 4.00                  | 161.20              | 0 13:06                               | 4.00                              |
| FSD9_OUTLET   | JUNCTION | 0.21                  | 2.51                  | 141.71              | 0 12:56                               | 2.51                              |
| FSDE1_Outlet  | JUNCTION | 0.16                  | 0.65                  | 265.55              | 0 14:23                               | 0.65                              |
| FSDE2_Outlet  | JUNCTION | 0.13                  | 0.62                  | 229.52              | 0 14:37                               | 0.62                              |
| FSDE4_Outlet  | JUNCTION | 0.19                  | 0.42                  | 98.02               | 0 13:49                               | 0.42                              |
| PNDW3_Outfall | JUNCTION | 0.00                  | 0.00                  | 118.20              | 0 00:00                               | 0.00                              |
| SC3-10        | JUNCTION | 0.00                  | 0.00                  | 63.20               | 0 00:00                               | 0.00                              |
| SC3-11A       | JUNCTION | 0.00                  | 0.00                  | 98.20               | 0 00:00                               | 0.00                              |



|         |          |      |      |        |         |      |
|---------|----------|------|------|--------|---------|------|
| SC3-11B | JUNCTION | 0.00 | 0.00 | 98.20  | 0 00:00 | 0.00 |
| SC3-12  | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-12A | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-13  | JUNCTION | 0.00 | 0.00 | 118.60 | 0 00:00 | 0.00 |
| SC3-14A | JUNCTION | 0.00 | 0.00 | 118.50 | 0 00:00 | 0.00 |
| SC3-14B | JUNCTION | 0.00 | 0.00 | 184.20 | 0 00:00 | 0.00 |
| SC3-15A | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-15B | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-16A | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-16B | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-17A | JUNCTION | 0.00 | 0.00 | 230.20 | 0 00:00 | 0.00 |
| SC3-17B | JUNCTION | 0.00 | 0.00 | 258.20 | 0 00:00 | 0.00 |
| SC3-18  | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-18B | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-19  | JUNCTION | 0.11 | 5.00 | 250.20 | 0 12:15 | 5.00 |
| SC3-1A  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-20  | JUNCTION | 0.00 | 0.00 | 324.20 | 0 00:00 | 0.00 |
| SC3-21  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-22  | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-23  | JUNCTION | 0.00 | 0.00 | 295.20 | 0 00:00 | 0.00 |
| SC3-24A | JUNCTION | 0.00 | 0.00 | 300.20 | 0 00:00 | 0.00 |
| SC3-24B | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-25  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-26  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-27  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-5A  | JUNCTION | 0.00 | 0.00 | 22.20  | 0 00:00 | 0.00 |
| SC3-5B  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-61  | JUNCTION | 0.05 | 1.61 | 29.81  | 0 12:20 | 1.60 |
| SC3-6A  | JUNCTION | 0.11 | 2.57 | 89.77  | 0 12:15 | 2.53 |
| SC3-6B  | JUNCTION | 0.00 | 0.00 | 93.20  | 0 00:00 | 0.00 |
| SC3-6C  | JUNCTION | 0.00 | 0.00 | 63.20  | 0 00:00 | 0.00 |
| SC3-7   | JUNCTION | 0.09 | 2.09 | 119.29 | 0 12:15 | 2.07 |
| SC3-72  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-73  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-74  | JUNCTION | 0.00 | 0.00 | 497.20 | 0 00:00 | 0.00 |
| SC3-75  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-76  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-77  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-78  | JUNCTION | 0.00 | 0.00 | 462.20 | 0 00:00 | 0.00 |
| SC3-79  | JUNCTION | 0.04 | 1.50 | 563.70 | 0 12:25 | 1.50 |
| SC3-8   | JUNCTION | 0.03 | 1.85 | 249.05 | 0 12:20 | 1.84 |
| SC3-80  | JUNCTION | 0.04 | 1.35 | 553.55 | 0 12:25 | 1.35 |
| SC3-81  | JUNCTION | 0.04 | 1.62 | 533.82 | 0 12:30 | 1.62 |
| SC3-82  | JUNCTION | 0.03 | 1.30 | 563.50 | 0 12:20 | 1.29 |
| SC3-88  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-89  | JUNCTION | 0.02 | 0.69 | 375.89 | 0 12:20 | 0.69 |
| SC3-9   | JUNCTION | 0.00 | 0.00 | 139.20 | 0 00:00 | 0.00 |
| SCE-1   | JUNCTION | 0.00 | 0.00 | 266.00 | 0 00:00 | 0.00 |
| SCE-10  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-11  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-13  | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-14  | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-15  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SCE-2   | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-3   | JUNCTION | 0.00 | 0.00 | 230.00 | 0 00:00 | 0.00 |
| SCE-4   | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-5   | JUNCTION | 0.00 | 0.00 | 128.90 | 0 00:00 | 0.00 |

|                 |          |      |       |        |   |       |       |
|-----------------|----------|------|-------|--------|---|-------|-------|
| SCE-6           | JUNCTION | 0.00 | 0.00  | 128.90 | 0 | 00:00 | 0.00  |
| SCE-7           | JUNCTION | 0.00 | 0.00  | 98.00  | 0 | 00:00 | 0.00  |
| SCE-8           | JUNCTION | 0.00 | 0.00  | 60.50  | 0 | 00:00 | 0.00  |
| SCE-9           | JUNCTION | 0.00 | 0.00  | 60.50  | 0 | 00:00 | 0.00  |
| SC3-12B         | JUNCTION | 0.00 | 0.00  | 157.20 | 0 | 00:00 | 0.00  |
| SC3-13A         | JUNCTION | 0.00 | 0.00  | 118.60 | 0 | 00:00 | 0.00  |
| SC3_OUTFALL     | OUTFALL  | 0.00 | 0.00  | 0.00   | 0 | 00:00 | 0.00  |
| SCE_OUTFALL     | OUTFALL  | 0.97 | 1.00  | 1.00   | 0 | 02:23 | 1.00  |
| FSD05           | STORAGE  | 3.23 | 6.04  | 28.24  | 0 | 13:47 | 6.04  |
| FSD06           | STORAGE  | 5.23 | 8.53  | 71.73  | 0 | 12:38 | 8.53  |
| FSD09           | STORAGE  | 2.46 | 7.27  | 146.47 | 0 | 12:56 | 7.27  |
| FSD1            | STORAGE  | 1.73 | 2.85  | 2.85   | 0 | 12:40 | 2.85  |
| FSD11B          | STORAGE  | 3.00 | 6.25  | 104.45 | 0 | 12:35 | 6.25  |
| FSD12           | STORAGE  | 4.35 | 6.08  | 163.08 | 0 | 12:24 | 6.08  |
| FSD13           | STORAGE  | 3.27 | 6.88  | 125.38 | 0 | 12:30 | 6.88  |
| FSD14A          | STORAGE  | 1.72 | 4.11  | 122.51 | 0 | 12:40 | 4.11  |
| FSD14B          | STORAGE  | 3.54 | 7.51  | 191.71 | 0 | 12:52 | 7.50  |
| FSD15B          | STORAGE  | 2.46 | 6.67  | 205.87 | 0 | 13:24 | 6.67  |
| FSD16A          | STORAGE  | 4.27 | 9.23  | 233.43 | 0 | 12:41 | 9.23  |
| FSD16B          | STORAGE  | 4.41 | 6.69  | 230.89 | 0 | 12:51 | 6.69  |
| FSD17A          | STORAGE  | 3.01 | 4.83  | 235.03 | 0 | 12:44 | 4.83  |
| FSD17B          | STORAGE  | 2.49 | 6.47  | 264.67 | 0 | 12:32 | 6.46  |
| FSD18           | STORAGE  | 2.74 | 5.34  | 208.54 | 0 | 12:43 | 5.34  |
| FSD20           | STORAGE  | 0.04 | 1.36  | 325.56 | 0 | 12:23 | 1.36  |
| FSD21           | STORAGE  | 0.73 | 3.60  | 335.80 | 0 | 12:38 | 3.60  |
| FSD22           | STORAGE  | 1.55 | 4.67  | 287.87 | 0 | 12:40 | 4.67  |
| FSD23           | STORAGE  | 0.79 | 3.78  | 299.78 | 0 | 12:40 | 3.78  |
| FSD27           | STORAGE  | 3.40 | 6.92  | 264.12 | 0 | 13:01 | 6.92  |
| FSD72           | STORAGE  | 1.36 | 4.61  | 344.81 | 0 | 12:30 | 4.61  |
| FSDE1           | STORAGE  | 3.04 | 5.94  | 271.94 | 0 | 14:23 | 5.94  |
| FSDE2           | STORAGE  | 0.82 | 5.59  | 235.59 | 0 | 14:37 | 5.59  |
| FSDE3           | STORAGE  | 3.13 | 6.93  | 135.83 | 0 | 13:06 | 6.93  |
| FSDE4           | STORAGE  | 2.50 | 4.82  | 102.82 | 0 | 13:49 | 4.82  |
| FSDE5           | STORAGE  | 3.64 | 7.38  | 67.88  | 0 | 14:17 | 7.38  |
| PNDE7           | STORAGE  | 0.64 | 3.36  | 35.86  | 0 | 14:01 | 3.36  |
| FSDE6           | STORAGE  | 3.41 | 6.20  | 38.70  | 0 | 13:23 | 6.20  |
| PNDW3           | STORAGE  | 0.26 | 6.21  | 124.51 | 0 | 13:51 | 6.21  |
| EX_STOCK_POND_1 | STORAGE  | 6.80 | 10.25 | 152.25 | 0 | 13:26 | 10.24 |
| FSD12A          | STORAGE  | 4.30 | 7.22  | 164.22 | 0 | 12:30 | 7.22  |
| EX_STOCK_POND_2 | STORAGE  | 3.24 | 5.98  | 235.08 | 0 | 12:58 | 5.98  |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum    |                            | Lateral Inflow Volume | Total Inflow Volume | Flow Balance Error |
|-------|----------|------------|----------------------------|-----------------------|---------------------|--------------------|
|       |          | Inflow CFS | Maximum Time of Occurrence |                       |                     |                    |
| 79    | JUNCTION | 0.00       | 18.60                      | 0                     | 0.736               | 0.000              |
| 80    | JUNCTION | 0.00       | 16.00                      | 0                     | 0.577               | 0.000              |
| 81    | JUNCTION | 0.00       | 1033.54                    | 0                     | 38.5                | 0.000              |
| DP-1E | JUNCTION | 0.00       | 54.71                      | 0                     | 3.26                | 0.000              |
| DP-21 | JUNCTION | 0.00       | 176.17                     | 0                     | 15.4                | 0.000              |

|               |          |        |         |   |       |       |       |           |
|---------------|----------|--------|---------|---|-------|-------|-------|-----------|
| DP-22         | JUNCTION | 0.00   | 156.50  | 0 | 12:25 | 0     | 12.1  | 0.000     |
| DP-25         | JUNCTION | 0.00   | 21.10   | 0 | 12:15 | 0     | 0.352 | 0.000     |
| DP-26         | JUNCTION | 0.00   | 32.37   | 0 | 13:24 | 0     | 2.91  | 0.000     |
| DP-2E         | JUNCTION | 0.00   | 103.33  | 0 | 12:27 | 0     | 7.09  | 0.000     |
| DP-3E         | JUNCTION | 0.00   | 116.05  | 0 | 12:37 | 0     | 12.8  | 0.000     |
| DP-4E         | JUNCTION | 0.00   | 122.72  | 0 | 12:39 | 0     | 16.5  | 0.000     |
| DP-53A        | JUNCTION | 0.00   | 1058.86 | 0 | 13:55 | 0     | 99.3  | 0.000     |
| DP-56         | JUNCTION | 0.00   | 85.35   | 0 | 14:01 | 0     | 23.4  | 0.000     |
| DP-60A        | JUNCTION | 0.00   | 1056.06 | 0 | 13:55 | 0     | 98.7  | 0.000     |
| DP-61         | JUNCTION | 0.00   | 1042.07 | 0 | 13:50 | 0     | 92.2  | 0.000     |
| DP-63         | JUNCTION | 0.00   | 940.16  | 0 | 13:51 | 0     | 74.3  | 0.000     |
| DP-64         | JUNCTION | 0.00   | 198.05  | 0 | 12:15 | 0     | 4.67  | 0.000     |
| DP-68         | JUNCTION | 0.00   | 1286.67 | 0 | 13:25 | 0     | 70    | 0.000     |
| DP-69         | JUNCTION | 0.00   | 1134.95 | 0 | 13:00 | 0     | 43.8  | 0.000     |
| DP-70         | JUNCTION | 0.00   | 1035.54 | 0 | 12:57 | 0     | 40    | 0.000     |
| DP-71         | JUNCTION | 0.00   | 1022.86 | 0 | 12:54 | 0     | 38.6  | 0.000     |
| DP-72         | JUNCTION | 0.00   | 939.53  | 0 | 12:51 | 0     | 33.7  | 0.000     |
| DP-73         | JUNCTION | 0.00   | 919.74  | 0 | 12:50 | 0     | 32.8  | 0.000     |
| DP-74         | JUNCTION | 0.00   | 187.20  | 0 | 12:28 | 0     | 4.83  | 0.000     |
| DP-75         | JUNCTION | 0.00   | 555.20  | 0 | 12:38 | 0     | 18.3  | 0.000     |
| DP-77         | JUNCTION | 0.00   | 877.81  | 0 | 12:45 | 0     | 30.6  | 0.000     |
| DP-78         | JUNCTION | 0.00   | 269.64  | 0 | 12:29 | 0     | 7.25  | 0.000     |
| DP-8          | JUNCTION | 0.00   | 90.17   | 0 | 13:16 | 0     | 24.4  | 0.001     |
| DP-87         | JUNCTION | 0.00   | 1181.68 | 0 | 13:06 | 0     | 50.3  | 0.000     |
| FSD9_OUTLET   | JUNCTION | 0.00   | 155.28  | 0 | 12:56 | 0     | 7.16  | 0.000     |
| FSDE1_Outlet  | JUNCTION | 0.00   | 7.20    | 0 | 14:23 | 0     | 1.23  | 0.000     |
| FSDE2_Outlet  | JUNCTION | 0.00   | 7.27    | 0 | 14:37 | 0     | 1.8   | -0.000    |
| FSDE4_Outlet  | JUNCTION | 0.00   | 3.34    | 0 | 13:49 | 0     | 1.7   | 0.000     |
| PNDW3_Outfall | JUNCTION | 0.00   | 0.00    | 0 | 00:00 | 0     | 0     | 0.000 gal |
| SC3-10        | JUNCTION | 30.77  | 30.77   | 0 | 12:20 | 0.643 | 0.643 | 0.000     |
| SC3-11A       | JUNCTION | 10.06  | 10.06   | 0 | 12:15 | 0.149 | 0.149 | 0.000     |
| SC3-11B       | JUNCTION | 172.72 | 172.72  | 0 | 12:15 | 4.71  | 4.71  | 0.000     |
| SC3-12        | JUNCTION | 106.54 | 106.54  | 0 | 12:15 | 3     | 3     | 0.000     |
| SC3-12A       | JUNCTION | 36.66  | 36.66   | 0 | 12:15 | 0.758 | 0.758 | 0.000     |
| SC3-13        | JUNCTION | 115.86 | 115.86  | 0 | 12:15 | 2.51  | 2.51  | 0.000     |
| SC3-14A       | JUNCTION | 307.16 | 307.16  | 0 | 12:15 | 8.14  | 8.14  | 0.000     |
| SC3-14B       | JUNCTION | 162.93 | 162.93  | 0 | 12:15 | 3.98  | 3.98  | 0.000     |
| SC3-15A       | JUNCTION | 76.32  | 76.32   | 0 | 12:25 | 2.46  | 2.46  | 0.000     |
| SC3-15B       | JUNCTION | 17.90  | 17.90   | 0 | 12:15 | 0.449 | 0.449 | 0.000     |
| SC3-16A       | JUNCTION | 434.23 | 434.23  | 0 | 12:15 | 11.4  | 11.4  | 0.000     |
| SC3-16B       | JUNCTION | 119.96 | 119.96  | 0 | 12:15 | 3.53  | 3.53  | 0.000     |
| SC3-17A       | JUNCTION | 63.03  | 63.03   | 0 | 12:15 | 1.42  | 1.42  | 0.000     |
| SC3-17B       | JUNCTION | 73.46  | 73.46   | 0 | 12:15 | 1.77  | 1.77  | 0.000     |
| SC3-18        | JUNCTION | 47.83  | 47.83   | 0 | 12:15 | 1.37  | 1.37  | 0.000     |
| SC3-18B       | JUNCTION | 8.86   | 8.86    | 0 | 12:20 | 0.371 | 0.371 | 0.000     |
| SC3-19        | JUNCTION | 154.22 | 154.22  | 0 | 12:25 | 3.92  | 3.92  | 0.000     |
| SC3-1A        | JUNCTION | 54.22  | 54.22   | 0 | 12:15 | 0.894 | 0.894 | 0.000     |
| SC3-20        | JUNCTION | 38.50  | 38.50   | 0 | 12:15 | 0.835 | 0.835 | 0.000     |
| SC3-21        | JUNCTION | 36.03  | 36.03   | 0 | 12:15 | 0.577 | 0.577 | 0.000     |
| SC3-22        | JUNCTION | 30.08  | 30.08   | 0 | 12:15 | 0.65  | 0.65  | 0.000     |
| SC3-23        | JUNCTION | 38.20  | 38.20   | 0 | 12:15 | 0.736 | 0.736 | 0.000     |
| SC3-24A       | JUNCTION | 28.30  | 28.30   | 0 | 12:20 | 0.777 | 0.777 | 0.000     |
| SC3-24B       | JUNCTION | 8.98   | 8.98    | 0 | 12:15 | 0.225 | 0.225 | 0.000     |
| SC3-25        | JUNCTION | 21.10  | 21.10   | 0 | 12:15 | 0.352 | 0.352 | 0.000     |
| SC3-26        | JUNCTION | 8.40   | 8.40    | 0 | 12:20 | 0.256 | 0.256 | 0.000     |
| SC3-27        | JUNCTION | 48.09  | 48.09   | 0 | 12:20 | 1.83  | 1.83  | 0.000     |
| SC3-5A        | JUNCTION | 112.35 | 112.35  | 0 | 12:15 | 2.16  | 2.16  | 0.000     |

|             |          |        |         |         |        |        |       |
|-------------|----------|--------|---------|---------|--------|--------|-------|
| SC3-5B      | JUNCTION | 149.00 | 149.00  | 0 12:15 | 3.26   | 3.26   | 0.000 |
| SC3-61      | JUNCTION | 47.40  | 47.40   | 0 12:20 | 1.23   | 1.23   | 0.000 |
| SC3-6A      | JUNCTION | 123.77 | 123.77  | 0 12:15 | 3.16   | 3.16   | 0.000 |
| SC3-6B      | JUNCTION | 74.85  | 74.85   | 0 12:15 | 1.67   | 1.67   | 0.000 |
| SC3-6C      | JUNCTION | 140.03 | 140.03  | 0 12:15 | 2.74   | 2.74   | 0.000 |
| SC3-7       | JUNCTION | 126.05 | 126.05  | 0 12:15 | 3      | 3      | 0.000 |
| SC3-72      | JUNCTION | 44.98  | 44.98   | 0 12:20 | 1.17   | 1.17   | 0.000 |
| SC3-73      | JUNCTION | 63.84  | 63.84   | 0 12:25 | 1.78   | 1.78   | 0.000 |
| SC3-74      | JUNCTION | 99.77  | 99.77   | 0 12:20 | 2.59   | 2.59   | 0.000 |
| SC3-75      | JUNCTION | 49.21  | 49.21   | 0 12:25 | 1.72   | 1.72   | 0.000 |
| SC3-76      | JUNCTION | 51.45  | 51.45   | 0 12:25 | 1.8    | 1.8    | 0.000 |
| SC3-77      | JUNCTION | 54.46  | 54.46   | 0 12:30 | 2.02   | 2.02   | 0.000 |
| SC3-78      | JUNCTION | 144.42 | 144.42  | 0 12:20 | 3.37   | 3.37   | 0.000 |
| SC3-79      | JUNCTION | 156.01 | 156.01  | 0 12:25 | 3.87   | 3.87   | 0.000 |
| SC3-8       | JUNCTION | 122.75 | 122.75  | 0 12:20 | 2.48   | 2.48   | 0.000 |
| SC3-80      | JUNCTION | 109.14 | 109.14  | 0 12:25 | 3.02   | 3.02   | 0.000 |
| SC3-81      | JUNCTION | 162.22 | 162.22  | 0 12:30 | 4.96   | 4.96   | 0.000 |
| SC3-82      | JUNCTION | 102.02 | 102.02  | 0 12:20 | 2.22   | 2.22   | 0.000 |
| SC3-88      | JUNCTION | 37.84  | 37.84   | 0 12:25 | 1.14   | 1.14   | 0.000 |
| SC3-89      | JUNCTION | 17.14  | 17.14   | 0 12:20 | 0.438  | 0.438  | 0.000 |
| SC3-9       | JUNCTION | 146.06 | 146.06  | 0 12:25 | 4.62   | 4.62   | 0.000 |
| SCE-1       | JUNCTION | 38.58  | 38.58   | 0 12:25 | 1.52   | 1.52   | 0.000 |
| SCE-10      | JUNCTION | 286.58 | 286.58  | 0 12:15 | 7.15   | 7.15   | 0.000 |
| SCE-11      | JUNCTION | 6.50   | 6.50    | 0 12:15 | 0.091  | 0.091  | 0.000 |
| SCE-13      | JUNCTION | 48.24  | 48.24   | 0 12:25 | 1.7    | 1.7    | 0.000 |
| SCE-14      | JUNCTION | 35.59  | 35.59   | 0 12:20 | 1.14   | 1.14   | 0.000 |
| SCE-15      | JUNCTION | 47.35  | 47.35   | 0 12:15 | 1.07   | 1.07   | 0.000 |
| SCE-2       | JUNCTION | 6.27   | 6.27    | 0 12:25 | 0.325  | 0.325  | 0.000 |
| SCE-3       | JUNCTION | 36.11  | 36.11   | 0 12:25 | 1.8    | 1.8    | 0.000 |
| SCE-4       | JUNCTION | 12.67  | 12.67   | 0 12:30 | 0.9    | 0.9    | 0.000 |
| SCE-5       | JUNCTION | 197.05 | 197.05  | 0 12:15 | 6.02   | 6.02   | 0.000 |
| SCE-6       | JUNCTION | 1.42   | 1.42    | 0 12:20 | 0.0678 | 0.0678 | 0.000 |
| SCE-7       | JUNCTION | 77.22  | 77.22   | 0 12:15 | 1.87   | 1.87   | 0.000 |
| SCE-8       | JUNCTION | 82.94  | 82.94   | 0 12:15 | 2.08   | 2.08   | 0.000 |
| SCE-9       | JUNCTION | 1.75   | 1.75    | 0 12:20 | 0.0676 | 0.0676 | 0.000 |
| SC3-12B     | JUNCTION | 8.01   | 8.01    | 0 12:20 | 0.319  | 0.319  | 0.000 |
| SC3-13A     | JUNCTION | 15.18  | 15.18   | 0 12:20 | 0.539  | 0.539  | 0.000 |
| SC3_OUTFALL | OUTFALL  | 0.00   | 1058.86 | 0 13:55 | 0      | 99.3   | 0.000 |
| SCE_OUTFALL | OUTFALL  | 0.00   | 0.08    | 0 02:22 | 0      | 0.15   | 0.000 |
| FSD05       | STORAGE  | 0.00   | 112.35  | 0 12:15 | 0      | 2.16   | 0.002 |
| FSD06       | STORAGE  | 0.00   | 462.71  | 0 12:16 | 0      | 10.7   | 0.076 |
| FSD09       | STORAGE  | 0.00   | 241.20  | 0 12:30 | 0      | 7.17   | 0.094 |
| FSD1        | STORAGE  | 0.00   | 54.22   | 0 12:15 | 0      | 0.894  | 0.113 |
| FSD11B      | STORAGE  | 0.00   | 172.72  | 0 12:15 | 0      | 4.71   | 0.028 |
| FSD12       | STORAGE  | 0.00   | 106.54  | 0 12:15 | 0      | 3      | 0.098 |
| FSD13       | STORAGE  | 0.00   | 115.86  | 0 12:15 | 0      | 2.51   | 0.077 |
| FSD14A      | STORAGE  | 0.00   | 307.16  | 0 12:15 | 0      | 8.14   | 0.087 |
| FSD14B      | STORAGE  | 0.00   | 162.93  | 0 12:15 | 0      | 3.98   | 0.038 |
| FSD15B      | STORAGE  | 0.00   | 87.85   | 0 12:25 | 0      | 2.91   | 0.074 |
| FSD16A      | STORAGE  | 0.00   | 434.23  | 0 12:15 | 0      | 11.4   | 0.043 |
| FSD16B      | STORAGE  | 0.00   | 119.96  | 0 12:15 | 0      | 3.53   | 0.061 |
| FSD17A      | STORAGE  | 0.00   | 63.03   | 0 12:15 | 0      | 1.42   | 0.088 |
| FSD17B      | STORAGE  | 0.00   | 73.46   | 0 12:15 | 0      | 1.77   | 0.069 |
| FSD18       | STORAGE  | 0.00   | 47.83   | 0 12:15 | 0      | 1.37   | 0.093 |
| FSD20       | STORAGE  | 0.00   | 38.50   | 0 12:15 | 0      | 0.835  | 0.181 |
| FSD21       | STORAGE  | 0.00   | 36.03   | 0 12:15 | 0      | 0.577  | 0.054 |
| FSD22       | STORAGE  | 0.00   | 30.08   | 0 12:15 | 0      | 0.65   | 0.164 |

|                 |         |      |         |   |       |   |       |       |
|-----------------|---------|------|---------|---|-------|---|-------|-------|
| FSD23           | STORAGE | 0.00 | 38.20   | 0 | 12:15 | 0 | 0.736 | 0.054 |
| FSD27           | STORAGE | 0.00 | 84.52   | 0 | 12:21 | 0 | 2.91  | 0.097 |
| FSD72           | STORAGE | 0.00 | 44.98   | 0 | 12:20 | 0 | 1.17  | 0.116 |
| FSDE1           | STORAGE | 0.00 | 38.58   | 0 | 12:25 | 0 | 1.52  | 0.028 |
| FSDE2           | STORAGE | 0.00 | 36.11   | 0 | 12:25 | 0 | 1.8   | 0.031 |
| FSDE3           | STORAGE | 0.00 | 197.05  | 0 | 12:15 | 0 | 6.02  | 0.038 |
| FSDE4           | STORAGE | 0.00 | 77.22   | 0 | 12:15 | 0 | 1.87  | 0.012 |
| FSDE5           | STORAGE | 0.00 | 82.94   | 0 | 12:15 | 0 | 2.08  | 0.007 |
| PNDE7           | STORAGE | 0.00 | 134.94  | 0 | 12:40 | 0 | 23.4  | 0.029 |
| FSDE6           | STORAGE | 0.00 | 286.58  | 0 | 12:15 | 0 | 7.15  | 0.015 |
| PNDW3           | STORAGE | 0.00 | 1286.68 | 0 | 13:25 | 0 | 70    | 0.434 |
| EX_STOCK_POND_1 | STORAGE | 0.00 | 1154.93 | 0 | 13:14 | 0 | 50.3  | 0.117 |
| FSD12A          | STORAGE | 0.00 | 36.66   | 0 | 12:15 | 0 | 0.758 | 0.096 |
| EX_STOCK_POND_2 | STORAGE | 0.00 | 1035.54 | 0 | 12:57 | 0 | 40    | 0.120 |

\*\*\*\*\*  
Node Flooding Summary  
\*\*\*\*\*

Flooding refers to all water that overflows a node, whether it ponds or not.

| -----         |                       |                  |                                    |                       |                        |
|---------------|-----------------------|------------------|------------------------------------|-----------------------|------------------------|
| Total Maximum |                       |                  |                                    |                       |                        |
| Node          | Maximum Hours Flooded | Maximum Rate CFS | Time of Max Occurrence days hr:min | Flood Volume 10^6 gal | Ponded Volume 1000 ft3 |
| -----         |                       |                  |                                    |                       |                        |
| DP-8          | 76.10                 | 90.09            | 0 13:17                            | 24.258                | 0.000                  |
| SC3-19        | 0.53                  | 54.15            | 0 12:26                            | 0.442                 | 0.000                  |

\*\*\*\*\*  
Storage Volume Summary  
\*\*\*\*\*

| -----        |                         |                    |                 |                         |               |                                    |                     |  |
|--------------|-------------------------|--------------------|-----------------|-------------------------|---------------|------------------------------------|---------------------|--|
| Storage Unit | Average Volume 1000 ft3 | Avg Evap Pcnt Full | Exfil Pcnt Loss | Maximum Volume 1000 ft3 | Max Pcnt Full | Time of Max Occurrence days hr:min | Maximum Outflow CFS |  |
| -----        |                         |                    |                 |                         |               |                                    |                     |  |
| FSD05        | 46.476                  | 11                 | 0 0             | 200.342                 | 49            | 0 13:46                            | 3.70                |  |
| FSD06        | 310.051                 | 26                 | 0 0             | 809.774                 | 67            | 0 12:37                            | 139.30              |  |
| FSD09        | 59.626                  | 8                  | 0 0             | 358.622                 | 50            | 0 12:55                            | 155.28              |  |
| FSD1         | 39.349                  | 11                 | 0 0             | 76.723                  | 21            | 0 12:39                            | 14.25               |  |
| FSD11B       | 64.825                  | 15                 | 0 0             | 235.082                 | 54            | 0 12:35                            | 77.00               |  |
| FSD12        | 58.750                  | 23                 | 0 0             | 109.795                 | 44            | 0 12:24                            | 84.49               |  |
| FSD13        | 41.314                  | 12                 | 0 0             | 164.684                 | 48            | 0 12:30                            | 43.80               |  |
| FSD14A       | 198.927                 | 13                 | 0 0             | 600.278                 | 38            | 0 12:39                            | 106.77              |  |
| FSD14B       | 115.466                 | 22                 | 0 0             | 338.548                 | 66            | 0 12:52                            | 19.30               |  |
| FSD15B       | 41.952                  | 7                  | 0 0             | 211.251                 | 37            | 0 13:24                            | 32.37               |  |
| FSD16A       | 271.246                 | 23                 | 0 0             | 791.947                 | 68            | 0 12:40                            | 128.30              |  |
| FSD16B       | 160.854                 | 31                 | 0 0             | 286.223                 | 56            | 0 12:51                            | 28.20               |  |
| FSD17A       | 27.210                  | 5                  | 0 0             | 110.966                 | 19            | 0 12:43                            | 16.66               |  |
| FSD17B       | 19.105                  | 11                 | 0 0             | 103.243                 | 57            | 0 12:32                            | 32.77               |  |
| FSD18        | 30.094                  | 13                 | 0 0             | 99.455                  | 43            | 0 12:43                            | 17.51               |  |
| FSD20        | 0.084                   | 0                  | 0 0             | 8.097                   | 6             | 0 12:23                            | 35.73               |  |
| FSD21        | 4.372                   | 3                  | 0 0             | 33.954                  | 25            | 0 12:38                            | 16.00               |  |

|                 |         |    |   |   |          |    |   |       |         |
|-----------------|---------|----|---|---|----------|----|---|-------|---------|
| FSD22           | 5.945   | 6  | 0 | 0 | 35.468   | 35 | 0 | 12:40 | 17.49   |
| FSD23           | 4.253   | 3  | 0 | 0 | 34.780   | 26 | 0 | 12:40 | 18.60   |
| FSD27           | 44.686  | 15 | 0 | 0 | 157.062  | 52 | 0 | 13:00 | 51.45   |
| FSD72           | 10.753  | 8  | 0 | 0 | 48.229   | 36 | 0 | 12:30 | 40.25   |
| FSDE1           | 64.875  | 23 | 0 | 0 | 154.344  | 54 | 0 | 14:23 | 7.20    |
| FSDE2           | 15.886  | 6  | 0 | 0 | 141.557  | 50 | 0 | 14:37 | 7.27    |
| FSDE3           | 171.626 | 22 | 0 | 0 | 529.993  | 69 | 0 | 13:05 | 29.83   |
| FSDE4           | 66.959  | 13 | 0 | 0 | 177.406  | 34 | 0 | 13:49 | 3.34    |
| FSDE5           | 79.581  | 30 | 0 | 0 | 196.697  | 75 | 0 | 14:16 | 3.09    |
| PNDE7           | 20.255  | 1  | 0 | 0 | 287.473  | 18 | 0 | 14:01 | 85.35   |
| FSDE6           | 227.450 | 18 | 0 | 0 | 700.697  | 56 | 0 | 13:23 | 16.32   |
| PNDW3           | 19.136  | 1  | 0 | 0 | 1034.438 | 40 | 0 | 13:51 | 931.20  |
| EX_STOCK_POND_1 | 738.726 | 44 | 0 | 0 | 1324.171 | 78 | 0 | 13:25 | 1048.23 |
| FSD12A          | 20.027  | 22 | 0 | 0 | 50.567   | 55 | 0 | 12:29 | 18.73   |
| EX_STOCK_POND_2 | 160.018 | 40 | 0 | 0 | 319.042  | 80 | 0 | 12:58 | 1033.54 |

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq | Avg Flow Pcnt | Max Flow CFS | Total Volume CFS | 10^6 gal |
|--------------|-----------|---------------|--------------|------------------|----------|
| SC3_OUTFALL  | 97.99     | 48.24         | 1058.86      | 99.291           |          |
| SCE_OUTFALL  | 97.52     | 0.07          | 0.08         | 0.150            |          |
| System       | 97.76     | 48.31         | 1058.93      | 99.440           |          |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow  CFS | Time of Occurrence days | Max  Veloc  ft/sec | Maximum Full Flow | Max/ Full Flow | Max/ Full Depth |
|--------|---------|--------------------|-------------------------|--------------------|-------------------|----------------|-----------------|
| RT-1   | CONDUIT | 149.77             | 0 12:43                 | 4.67               | 0.00              | 0.08           |                 |
| RT-10A | CONDUIT | 107.67             | 0 12:51                 | 6.20               | 1.08              | 1.00           |                 |
| RT-10B | CONDUIT | 32.37              | 0 13:26                 | 11.89              | 0.08              | 0.20           |                 |
| RT-11A | CONDUIT | 1031.86            | 0 13:01                 | 7.13               | 0.02              | 0.15           |                 |
| RT-11B | CONDUIT | 1119.00            | 0 13:06                 | 6.70               | 0.02              | 0.17           |                 |
| RT-11C | CONDUIT | 1154.93            | 0 13:14                 | 4.67               | 0.03              | 0.20           |                 |
| RT-12A | CONDUIT | 156.87             | 0 13:25                 | 17.14              | 0.82              | 0.69           |                 |
| RT-12B | CONDUIT | 176.11             | 0 13:25                 | 22.73              | 0.48              | 0.49           |                 |
| RT-16  | CONDUIT | 121.70             | 0 12:16                 | 16.57              | 0.87              | 0.72           |                 |
| RT-17B | CONDUIT | 154.92             | 0 12:59                 | 18.75              | 0.72              | 0.63           |                 |
| RT-18  | CONDUIT | 1040.49            | 0 13:55                 | 6.42               | 0.02              | 0.14           |                 |
| RT-19  | CONDUIT | 46.59              | 0 12:23                 | 7.73               | 0.16              | 0.27           |                 |
| RT-1E  | CONDUIT | 7.20               | 0 14:24                 | 5.44               | 0.06              | 0.16           |                 |
| RT-2   | CONDUIT | 94.01              | 0 12:40                 | 4.27               | 0.00              | 0.06           |                 |
| RT-20  | CONDUIT | 1056.04            | 0 13:55                 | 9.81               | 0.01              | 0.10           |                 |
| RT-21  | CONDUIT | 19.43              | 0 12:20                 | 11.12              | 0.13              | 0.24           |                 |

|        |         |         |   |       |       |      |      |
|--------|---------|---------|---|-------|-------|------|------|
| RT-22  | CONDUIT | 18.72   | 0 | 13:04 | 13.58 | 0.20 | 0.31 |
| RT-2E  | CONDUIT | 54.33   | 0 | 12:28 | 10.04 | 0.41 | 0.45 |
| RT-3   | CONDUIT | 94.58   | 0 | 12:30 | 4.26  | 0.00 | 0.06 |
| RT-3E  | CONDUIT | 7.27    | 0 | 14:38 | 5.89  | 0.05 | 0.15 |
| RT-4   | CONDUIT | 178.58  | 0 | 12:36 | 4.73  | 0.00 | 0.08 |
| RT-4E  | CONDUIT | 102.52  | 0 | 12:32 | 12.33 | 0.73 | 0.63 |
| RT-5   | CONDUIT | 538.07  | 0 | 12:46 | 6.75  | 0.01 | 0.15 |
| RT-5E  | CONDUIT | 116.02  | 0 | 12:37 | 16.92 | 0.31 | 0.38 |
| RT-6   | CONDUIT | 146.64  | 0 | 12:33 | 5.08  | 0.00 | 0.07 |
| RT-6B  | CONDUIT | 228.12  | 0 | 12:47 | 4.92  | 0.00 | 0.10 |
| RT-6E  | CONDUIT | 3.33    | 0 | 13:53 | 4.68  | 0.02 | 0.11 |
| RT-7A  | CONDUIT | 17.05   | 0 | 12:21 | 11.87 | 0.06 | 0.17 |
| RT-7E  | CONDUIT | 122.71  | 0 | 12:40 | 11.75 | 0.33 | 0.40 |
| RT-8   | CONDUIT | 35.72   | 0 | 12:24 | 15.71 | 0.81 | 0.68 |
| RT-9A  | CONDUIT | 868.70  | 0 | 12:51 | 6.21  | 0.02 | 0.15 |
| RT-9B  | CONDUIT | 919.14  | 0 | 12:52 | 7.13  | 0.01 | 0.14 |
| RT-9C  | CONDUIT | 937.32  | 0 | 12:54 | 6.65  | 0.02 | 0.15 |
| RT-9D  | CONDUIT | 1020.18 | 0 | 12:57 | 6.92  | 0.02 | 0.15 |
| RT-14  | CONDUIT | 939.54  | 0 | 13:54 | 6.64  | 0.01 | 0.13 |
| 1      | DUMMY   | 99.77   | 0 | 12:20 |       |      |      |
| 2      | DUMMY   | 63.84   | 0 | 12:25 |       |      |      |
| 3      | DUMMY   | 49.21   | 0 | 12:25 |       |      |      |
| 4      | DUMMY   | 51.45   | 0 | 12:25 |       |      |      |
| 5      | DUMMY   | 144.42  | 0 | 12:20 |       |      |      |
| 6      | DUMMY   | 44.98   | 0 | 12:20 |       |      |      |
| 7      | DUMMY   | 54.46   | 0 | 12:30 |       |      |      |
| 8      | DUMMY   | 37.84   | 0 | 12:25 |       |      |      |
| 9      | DUMMY   | 38.58   | 0 | 12:25 |       |      |      |
| 10     | DUMMY   | 6.27    | 0 | 12:25 |       |      |      |
| 11     | DUMMY   | 8.40    | 0 | 12:20 |       |      |      |
| 12     | DUMMY   | 48.09   | 0 | 12:20 |       |      |      |
| 13     | DUMMY   | 38.20   | 0 | 12:15 |       |      |      |
| 14     | DUMMY   | 36.03   | 0 | 12:15 |       |      |      |
| 15     | DUMMY   | 21.10   | 0 | 12:15 |       |      |      |
| 16     | DUMMY   | 8.98    | 0 | 12:15 |       |      |      |
| 17     | DUMMY   | 30.08   | 0 | 12:15 |       |      |      |
| 18     | DUMMY   | 73.46   | 0 | 12:15 |       |      |      |
| 20     | DUMMY   | 38.50   | 0 | 12:15 |       |      |      |
| 22     | DUMMY   | 162.93  | 0 | 12:15 |       |      |      |
| 24     | DUMMY   | 307.16  | 0 | 12:15 |       |      |      |
| 25     | DUMMY   | 115.86  | 0 | 12:15 |       |      |      |
| 27     | DUMMY   | 77.22   | 0 | 12:15 |       |      |      |
| 28     | DUMMY   | 82.94   | 0 | 12:15 |       |      |      |
| 29     | DUMMY   | 197.05  | 0 | 12:15 |       |      |      |
| 30     | DUMMY   | 119.96  | 0 | 12:15 |       |      |      |
| 34     | DUMMY   | 47.83   | 0 | 12:15 |       |      |      |
| 36     | DUMMY   | 36.11   | 0 | 12:25 |       |      |      |
| 37     | DUMMY   | 12.67   | 0 | 12:30 |       |      |      |
| 38     | DUMMY   | 146.06  | 0 | 12:25 |       |      |      |
| RT-17A | CONDUIT | 104.75  | 0 | 12:34 | 6.00  | 0.00 | 0.09 |
| 39     | DUMMY   | 76.32   | 0 | 12:25 |       |      |      |
| 40     | DUMMY   | 17.90   | 0 | 12:15 |       |      |      |
| 42     | DUMMY   | 106.54  | 0 | 12:15 |       |      |      |
| 44     | DUMMY   | 6.50    | 0 | 12:15 |       |      |      |
| 45     | DUMMY   | 1.75    | 0 | 12:20 |       |      |      |
| 46     | DUMMY   | 1.42    | 0 | 12:20 |       |      |      |
| 47     | DUMMY   | 35.59   | 0 | 12:20 |       |      |      |

|                         |         |         |   |       |       |      |      |
|-------------------------|---------|---------|---|-------|-------|------|------|
| 48                      | DUMMY   | 48.24   | 0 | 12:25 |       |      |      |
| 51                      | DUMMY   | 286.58  | 0 | 12:15 |       |      |      |
| 54                      | DUMMY   | 172.72  | 0 | 12:15 |       |      |      |
| 56                      | DUMMY   | 10.06   | 0 | 12:15 |       |      |      |
| 58                      | CONDUIT | 1286.68 | 0 | 13:25 | 12.78 | 0.01 | 0.10 |
| 63                      | DUMMY   | 112.35  | 0 | 12:15 |       |      |      |
| 65                      | DUMMY   | 54.22   | 0 | 12:15 |       |      |      |
| 67                      | DUMMY   | 1058.86 | 0 | 13:55 |       |      |      |
| RT-15A                  | CONDUIT | 125.05  | 0 | 12:16 | 19.10 | 0.53 | 0.52 |
| RT-15B                  | CONDUIT | 197.04  | 0 | 12:16 | 19.39 | 0.32 | 0.39 |
| 69                      | DUMMY   | 140.03  | 0 | 12:15 |       |      |      |
| 70                      | DUMMY   | 74.85   | 0 | 12:15 |       |      |      |
| RT-25                   | CONDUIT | 85.35   | 0 | 14:05 | 4.26  | 0.01 | 0.14 |
| 71                      | CONDUIT | 0.08    | 0 | 02:22 | 0.10  | 1.08 | 1.00 |
| 74                      | DUMMY   | 30.77   | 0 | 12:20 |       |      |      |
| 75                      | DUMMY   | 28.30   | 0 | 12:20 |       |      |      |
| 77                      | DUMMY   | 149.00  | 0 | 12:15 |       |      |      |
| 78                      | DUMMY   | 63.03   | 0 | 12:15 |       |      |      |
| 79                      | DUMMY   | 434.23  | 0 | 12:15 |       |      |      |
| 80                      | CONDUIT | 16.01   | 0 | 12:46 | 16.09 | 0.16 | 0.27 |
| 81                      | DUMMY   | 36.66   | 0 | 12:15 |       |      |      |
| 82                      | DUMMY   | 47.35   | 0 | 12:15 |       |      |      |
| 83                      | DUMMY   | 8.86    | 0 | 12:20 |       |      |      |
| 84                      | DUMMY   | 1035.54 | 0 | 12:57 |       |      |      |
| 85                      | DUMMY   | 8.01    | 0 | 12:20 |       |      |      |
| 86                      | DUMMY   | 15.18   | 0 | 12:20 |       |      |      |
| FSD01_Outlet            | DUMMY   | 14.25   | 0 | 12:40 |       |      |      |
| FSD05_Outlet            | DUMMY   | 3.70    | 0 | 12:11 |       |      |      |
| FSD06_Outlet            | DUMMY   | 139.30  | 0 | 12:29 |       |      |      |
| FSD11B_Outlet           | DUMMY   | 77.00   | 0 | 12:08 |       |      |      |
| FSD12_Outlet            | DUMMY   | 84.49   | 0 | 12:24 |       |      |      |
| FSD13_Outlet            | DUMMY   | 43.80   | 0 | 12:20 |       |      |      |
| FSD14A_Outlet           | DUMMY   | 106.77  | 0 | 12:40 |       |      |      |
| FSD14B_Outlet           | DUMMY   | 19.30   | 0 | 12:06 |       |      |      |
| FSD15B_Outlet           | DUMMY   | 32.37   | 0 | 13:24 |       |      |      |
| FSD16A_Outlet           | DUMMY   | 128.30  | 0 | 12:17 |       |      |      |
| FSD16B_Outlet           | DUMMY   | 28.20   | 0 | 12:25 |       |      |      |
| FSD17B_Outlet           | DUMMY   | 32.77   | 0 | 12:32 |       |      |      |
| FSD18_Outlet            | DUMMY   | 17.51   | 0 | 12:43 |       |      |      |
| FSD21_Outlet            | DUMMY   | 16.00   | 0 | 12:31 |       |      |      |
| FSD22_Outlet            | DUMMY   | 17.49   | 0 | 12:40 |       |      |      |
| FSD72_Outlet            | DUMMY   | 40.25   | 0 | 12:30 |       |      |      |
| FSD9_Outlet             | DUMMY   | 155.28  | 0 | 12:56 |       |      |      |
| FSDE2_Outlet            | DUMMY   | 7.27    | 0 | 14:37 |       |      |      |
| FSDE3_Outlet            | DUMMY   | 29.83   | 0 | 13:06 |       |      |      |
| FSDE4_Outlet            | DUMMY   | 3.34    | 0 | 13:49 |       |      |      |
| FSDE5_Outlet            | DUMMY   | 3.09    | 0 | 14:17 |       |      |      |
| FSDE6_Outlet            | DUMMY   | 16.32   | 0 | 13:23 |       |      |      |
| FSDE1_Outlet            | DUMMY   | 7.20    | 0 | 14:23 |       |      |      |
| PNDE7_Outlet            | DUMMY   | 85.35   | 0 | 14:01 |       |      |      |
| FSD17A_Outlet           | DUMMY   | 16.66   | 0 | 12:44 |       |      |      |
| PNDW3_Outlet            | DUMMY   | 931.20  | 0 | 13:51 |       |      |      |
| FSD27_Outlet            | DUMMY   | 51.45   | 0 | 13:01 |       |      |      |
| EX_STOCK_POND_1_OUTFALL | DUMMY   | 1048.23 | 0 | 13:26 |       |      |      |
| FSD23_Outlet            | DUMMY   | 18.60   | 0 | 12:20 |       |      |      |
| FSD12A_Outlet           | DUMMY   | 18.73   | 0 | 12:30 |       |      |      |
| EX_STOCK_POND_2_OUTLET  | DUMMY   | 1033.54 | 0 | 12:58 |       |      |      |



\*\*\*\*\*  
 Conduit Surcharge Summary  
 \*\*\*\*\*

| Conduit | Hours                  |          | Hours      |          | Capacity    |         |
|---------|------------------------|----------|------------|----------|-------------|---------|
|         | ----- Hours Full ----- | -----    | Above Full | Dnstream |             |         |
|         | Both Ends              | Upstream |            |          | Normal Flow | Limited |
| RT-10A  | 0.53                   | 0.53     | 0.53       | 0.57     | 0.53        |         |
| 71      | 76.10                  | 76.10    | 76.10      | 0.04     | 76.10       |         |

Analysis begun on: Thu Mar 24 10:17:34 2022  
 Analysis ended on: Thu Mar 24 10:17:35 2022  
 Total elapsed time: 00:00:01

Sterling Ranch 2022 MDDP Amendment

50-YR Type II Storm

**NOTE: These warnings are generated from using 1 foot dummy conduits between basin nodes and detention ponds to ensure there is no additional travel time between the bottom of the basin and the detention pond, except where conveyed by a channel.**

- WARNING 04: minimum elevation drop used for Conduit 1
- WARNING 04: minimum elevation drop used for Conduit 2
- WARNING 04: minimum elevation drop used for Conduit 3
- WARNING 04: minimum elevation drop used for Conduit 4
- WARNING 04: minimum elevation drop used for Conduit 5
- WARNING 04: minimum elevation drop used for Conduit 6
- WARNING 04: minimum elevation drop used for Conduit 7
- WARNING 04: minimum elevation drop used for Conduit 8
- WARNING 04: minimum elevation drop used for Conduit 9
- WARNING 04: minimum elevation drop used for Conduit 10
- WARNING 04: minimum elevation drop used for Conduit 11
- WARNING 04: minimum elevation drop used for Conduit 12
- WARNING 04: minimum elevation drop used for Conduit 14
- WARNING 04: minimum elevation drop used for Conduit 15
- WARNING 04: minimum elevation drop used for Conduit 16
- WARNING 04: minimum elevation drop used for Conduit 17
- WARNING 04: minimum elevation drop used for Conduit 18
- WARNING 04: minimum elevation drop used for Conduit 20
- WARNING 04: minimum elevation drop used for Conduit 22
- WARNING 04: minimum elevation drop used for Conduit 27
- WARNING 04: minimum elevation drop used for Conduit 28
- WARNING 04: minimum elevation drop used for Conduit 29
- WARNING 04: minimum elevation drop used for Conduit 30
- WARNING 04: minimum elevation drop used for Conduit 34
- WARNING 04: minimum elevation drop used for Conduit 36
- WARNING 04: minimum elevation drop used for Conduit 37
- WARNING 04: minimum elevation drop used for Conduit 38
- WARNING 04: minimum elevation drop used for Conduit 39
- WARNING 04: minimum elevation drop used for Conduit 40
- WARNING 04: minimum elevation drop used for Conduit 44
- WARNING 04: minimum elevation drop used for Conduit 45
- WARNING 04: minimum elevation drop used for Conduit 46
- WARNING 04: minimum elevation drop used for Conduit 47
- WARNING 04: minimum elevation drop used for Conduit 48
- WARNING 04: minimum elevation drop used for Conduit 51
- WARNING 04: minimum elevation drop used for Conduit 54
- WARNING 08: elevation drop exceeds length for Conduit 56
- WARNING 04: minimum elevation drop used for Conduit 63
- WARNING 04: minimum elevation drop used for Conduit 65
- WARNING 04: minimum elevation drop used for Conduit 67
- WARNING 04: minimum elevation drop used for Conduit 69
- WARNING 04: minimum elevation drop used for Conduit 70
- WARNING 04: minimum elevation drop used for Conduit 71
- WARNING 04: minimum elevation drop used for Conduit 74
- WARNING 04: minimum elevation drop used for Conduit 75
- WARNING 08: elevation drop exceeds length for Conduit 77
- WARNING 04: minimum elevation drop used for Conduit 78
- WARNING 04: minimum elevation drop used for Conduit 79
- WARNING 04: minimum elevation drop used for Conduit 82

WARNING 04: minimum elevation drop used for Conduit 83  
 WARNING 04: minimum elevation drop used for Conduit 85  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12\_Outlet  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12A\_Outlet

\*\*\*\*\*  
 NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.  
 \*\*\*\*\*

\*\*\*\*\*  
 Analysis Options  
 \*\*\*\*\*

Flow Units ..... CFS  
 Process Models:  
 Rainfall/Runoff ..... NO  
 RDII ..... NO  
 Snowmelt ..... NO  
 Groundwater ..... NO  
 Flow Routing ..... YES  
 Ponding Allowed ..... NO  
 Water Quality ..... NO  
 Flow Routing Method ..... KINWAVE  
 Starting Date ..... 01/01/2005 00:00:00  
 Ending Date ..... 01/04/2005 06:00:00  
 Antecedent Dry Days ..... 0.0  
 Report Time Step ..... 00:05:00  
 Routing Time Step ..... 30.00 sec

|                             | Volume    | Volume              |
|-----------------------------|-----------|---------------------|
| Flow Routing Continuity     | acre-feet | 10 <sup>6</sup> gal |
| *****                       | -----     | -----               |
| Dry Weather Inflow .....    | 0.000     | 0.000               |
| Wet Weather Inflow .....    | 0.000     | 0.000               |
| Groundwater Inflow .....    | 0.000     | 0.000               |
| RDII Inflow .....           | 0.000     | 0.000               |
| External Inflow .....       | 537.363   | 175.108             |
| External Outflow .....      | 395.299   | 128.814             |
| Flooding Loss .....         | 96.917    | 31.582              |
| Evaporation Loss .....      | 0.000     | 0.000               |
| Exfiltration Loss .....     | 0.000     | 0.000               |
| Initial Stored Volume ..... | 0.000     | 0.000               |
| Final Stored Volume .....   | 46.348    | 15.103              |
| Continuity Error (%) .....  | -0.223    |                     |

\*\*\*\*\*  
 Highest Flow Instability Indexes  
 \*\*\*\*\*

Link PNDW3\_Outlet (62)  
 Link RT-14 (62)  
 Link RT-18 (62)  
 Link 67 (61)  
 Link RT-20 (61)

\*\*\*\*\*

Routing Time Step Summary

\*\*\*\*\*

Minimum Time Step : 30.00 sec  
 Average Time Step : 30.00 sec  
 Maximum Time Step : 30.00 sec  
 Percent in Steady State : 0.00  
 Average Iterations per Step : 1.00  
 Percent Not Converging : 0.00

\*\*\*\*\*

Node Depth Summary

\*\*\*\*\*

| Node          | Type     | Average Depth<br>Feet | Maximum Depth<br>Feet | Maximum HGL<br>Feet | Time of Occurrence<br>days hr:min | Max Reported<br>Max Depth<br>Feet |
|---------------|----------|-----------------------|-----------------------|---------------------|-----------------------------------|-----------------------------------|
| 79            | JUNCTION | 0.07                  | 0.92                  | 295.92              | 0 12:16                           | 0.92                              |
| 80            | JUNCTION | 0.07                  | 0.81                  | 331.81              | 0 12:20                           | 0.81                              |
| 81            | JUNCTION | 0.15                  | 3.54                  | 232.54              | 0 12:56                           | 3.53                              |
| DP-1E         | JUNCTION | 0.22                  | 2.11                  | 261.01              | 0 12:25                           | 2.11                              |
| DP-21         | JUNCTION | 0.33                  | 2.76                  | 186.96              | 0 13:54                           | 2.76                              |
| DP-22         | JUNCTION | 0.33                  | 2.75                  | 226.95              | 0 12:18                           | 2.75                              |
| DP-25         | JUNCTION | 0.03                  | 1.00                  | 333.20              | 0 12:15                           | 0.98                              |
| DP-26         | JUNCTION | 0.16                  | 1.26                  | 200.46              | 0 13:12                           | 1.26                              |
| DP-2E         | JUNCTION | 0.31                  | 3.16                  | 222.06              | 0 12:26                           | 3.14                              |
| DP-3E         | JUNCTION | 0.37                  | 3.14                  | 132.04              | 0 12:33                           | 3.13                              |
| DP-4E         | JUNCTION | 0.52                  | 3.00                  | 63.50               | 0 12:42                           | 3.00                              |
| DP-53A        | JUNCTION | 0.25                  | 2.47                  | 2.47                | 0 13:47                           | 2.47                              |
| DP-56         | JUNCTION | 0.44                  | 1.66                  | 33.66               | 0 14:07                           | 1.66                              |
| DP-60A        | JUNCTION | 0.33                  | 3.40                  | 25.60               | 0 13:47                           | 3.40                              |
| DP-61         | JUNCTION | 0.34                  | 3.64                  | 66.84               | 0 13:02                           | 3.40                              |
| DP-63         | JUNCTION | 0.26                  | 3.04                  | 101.24              | 0 13:47                           | 3.04                              |
| DP-64         | JUNCTION | 0.12                  | 2.61                  | 95.81               | 0 12:15                           | 2.58                              |
| DP-68         | JUNCTION | 0.30                  | 2.33                  | 120.73              | 0 13:18                           | 2.33                              |
| DP-69         | JUNCTION | 0.22                  | 5.00                  | 208.20              | 0 12:18                           | 5.00                              |
| DP-70         | JUNCTION | 0.15                  | 3.58                  | 232.78              | 0 12:54                           | 3.58                              |
| DP-71         | JUNCTION | 0.15                  | 3.59                  | 260.79              | 0 12:52                           | 3.58                              |
| DP-72         | JUNCTION | 0.12                  | 3.49                  | 286.69              | 0 12:49                           | 3.49                              |
| DP-73         | JUNCTION | 0.14                  | 3.49                  | 303.69              | 0 12:49                           | 3.49                              |
| DP-74         | JUNCTION | 0.05                  | 1.97                  | 499.17              | 0 12:27                           | 1.96                              |
| DP-75         | JUNCTION | 0.10                  | 3.44                  | 435.64              | 0 12:37                           | 3.43                              |
| DP-77         | JUNCTION | 0.12                  | 3.50                  | 343.70              | 0 12:44                           | 3.50                              |
| DP-78         | JUNCTION | 0.07                  | 2.39                  | 464.59              | 0 12:28                           | 2.39                              |
| DP-8          | JUNCTION | 9.79                  | 10.00                 | 10.00               | 0 01:40                           | 10.00                             |
| DP-87         | JUNCTION | 0.26                  | 4.69                  | 161.89              | 0 13:03                           | 4.68                              |
| FSD9_OUTLET   | JUNCTION | 0.23                  | 4.00                  | 143.20              | 0 12:43                           | 4.00                              |
| FSDE1_Outlet  | JUNCTION | 0.18                  | 0.89                  | 265.79              | 0 13:57                           | 0.89                              |
| FSDE2_Outlet  | JUNCTION | 0.14                  | 0.89                  | 229.79              | 0 13:59                           | 0.89                              |
| FSDE4_Outlet  | JUNCTION | 0.21                  | 0.47                  | 98.07               | 0 13:43                           | 0.47                              |
| PNDW3_Outfall | JUNCTION | 0.00                  | 0.00                  | 118.20              | 0 00:00                           | 0.00                              |
| SC3-10        | JUNCTION | 0.00                  | 0.00                  | 63.20               | 0 00:00                           | 0.00                              |
| SC3-11A       | JUNCTION | 0.00                  | 0.00                  | 98.20               | 0 00:00                           | 0.00                              |

|         |          |      |      |        |         |      |
|---------|----------|------|------|--------|---------|------|
| SC3-11B | JUNCTION | 0.00 | 0.00 | 98.20  | 0 00:00 | 0.00 |
| SC3-12  | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-12A | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-13  | JUNCTION | 0.00 | 0.00 | 118.60 | 0 00:00 | 0.00 |
| SC3-14A | JUNCTION | 0.00 | 0.00 | 118.50 | 0 00:00 | 0.00 |
| SC3-14B | JUNCTION | 0.00 | 0.00 | 184.20 | 0 00:00 | 0.00 |
| SC3-15A | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-15B | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-16A | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-16B | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-17A | JUNCTION | 0.00 | 0.00 | 230.20 | 0 00:00 | 0.00 |
| SC3-17B | JUNCTION | 0.00 | 0.00 | 258.20 | 0 00:00 | 0.00 |
| SC3-18  | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-18B | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-19  | JUNCTION | 0.13 | 5.00 | 250.20 | 0 12:12 | 5.00 |
| SC3-1A  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-20  | JUNCTION | 0.00 | 0.00 | 324.20 | 0 00:00 | 0.00 |
| SC3-21  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-22  | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-23  | JUNCTION | 0.00 | 0.00 | 295.20 | 0 00:00 | 0.00 |
| SC3-24A | JUNCTION | 0.00 | 0.00 | 300.20 | 0 00:00 | 0.00 |
| SC3-24B | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-25  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-26  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-27  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-5A  | JUNCTION | 0.00 | 0.00 | 22.20  | 0 00:00 | 0.00 |
| SC3-5B  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-61  | JUNCTION | 0.06 | 1.88 | 30.08  | 0 12:20 | 1.87 |
| SC3-6A  | JUNCTION | 0.12 | 3.50 | 90.70  | 0 12:14 | 3.50 |
| SC3-6B  | JUNCTION | 0.00 | 0.00 | 93.20  | 0 00:00 | 0.00 |
| SC3-6C  | JUNCTION | 0.00 | 0.00 | 63.20  | 0 00:00 | 0.00 |
| SC3-7   | JUNCTION | 0.10 | 2.33 | 119.53 | 0 12:15 | 2.31 |
| SC3-72  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-73  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-74  | JUNCTION | 0.00 | 0.00 | 497.20 | 0 00:00 | 0.00 |
| SC3-75  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-76  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-77  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-78  | JUNCTION | 0.00 | 0.00 | 462.20 | 0 00:00 | 0.00 |
| SC3-79  | JUNCTION | 0.05 | 1.69 | 563.89 | 0 12:25 | 1.69 |
| SC3-8   | JUNCTION | 0.04 | 2.12 | 249.32 | 0 12:20 | 2.10 |
| SC3-80  | JUNCTION | 0.05 | 1.53 | 553.73 | 0 12:25 | 1.53 |
| SC3-81  | JUNCTION | 0.05 | 1.84 | 534.04 | 0 12:30 | 1.84 |
| SC3-82  | JUNCTION | 0.03 | 1.47 | 563.67 | 0 12:20 | 1.46 |
| SC3-88  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-89  | JUNCTION | 0.02 | 0.80 | 376.00 | 0 12:20 | 0.79 |
| SC3-9   | JUNCTION | 0.00 | 0.00 | 139.20 | 0 00:00 | 0.00 |
| SCE-1   | JUNCTION | 0.00 | 0.00 | 266.00 | 0 00:00 | 0.00 |
| SCE-10  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-11  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-13  | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-14  | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-15  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SCE-2   | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-3   | JUNCTION | 0.00 | 0.00 | 230.00 | 0 00:00 | 0.00 |
| SCE-4   | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-5   | JUNCTION | 0.00 | 0.00 | 128.90 | 0 00:00 | 0.00 |

|                 |          |      |       |        |   |       |       |
|-----------------|----------|------|-------|--------|---|-------|-------|
| SCE-6           | JUNCTION | 0.00 | 0.00  | 128.90 | 0 | 00:00 | 0.00  |
| SCE-7           | JUNCTION | 0.00 | 0.00  | 98.00  | 0 | 00:00 | 0.00  |
| SCE-8           | JUNCTION | 0.00 | 0.00  | 60.50  | 0 | 00:00 | 0.00  |
| SCE-9           | JUNCTION | 0.00 | 0.00  | 60.50  | 0 | 00:00 | 0.00  |
| SC3-12B         | JUNCTION | 0.00 | 0.00  | 157.20 | 0 | 00:00 | 0.00  |
| SC3-13A         | JUNCTION | 0.00 | 0.00  | 118.60 | 0 | 00:00 | 0.00  |
| SC3_OUTFALL     | OUTFALL  | 0.00 | 0.00  | 0.00   | 0 | 00:00 | 0.00  |
| SCE_OUTFALL     | OUTFALL  | 0.97 | 1.00  | 1.00   | 0 | 02:10 | 1.00  |
| FSD05           | STORAGE  | 3.48 | 6.69  | 28.89  | 0 | 14:01 | 6.69  |
| FSD06           | STORAGE  | 5.31 | 9.36  | 72.56  | 0 | 12:41 | 9.35  |
| FSD09           | STORAGE  | 2.51 | 7.92  | 147.12 | 0 | 12:52 | 7.91  |
| FSD1            | STORAGE  | 1.74 | 3.20  | 3.20   | 0 | 12:36 | 3.20  |
| FSD11B          | STORAGE  | 3.05 | 7.00  | 105.20 | 0 | 12:39 | 7.00  |
| FSD12           | STORAGE  | 4.39 | 6.40  | 163.40 | 0 | 12:26 | 6.40  |
| FSD13           | STORAGE  | 3.32 | 7.66  | 126.16 | 0 | 12:33 | 7.65  |
| FSD14A          | STORAGE  | 1.75 | 4.46  | 122.86 | 0 | 12:35 | 4.46  |
| FSD14B          | STORAGE  | 3.65 | 8.51  | 192.71 | 0 | 12:55 | 8.51  |
| FSD15B          | STORAGE  | 2.51 | 7.35  | 206.55 | 0 | 13:12 | 7.35  |
| FSD16A          | STORAGE  | 4.35 | 10.46 | 234.66 | 0 | 12:45 | 10.46 |
| FSD16B          | STORAGE  | 4.46 | 7.56  | 231.76 | 0 | 12:55 | 7.56  |
| FSD17A          | STORAGE  | 3.05 | 5.04  | 235.24 | 0 | 12:40 | 5.04  |
| FSD17B          | STORAGE  | 2.56 | 6.90  | 265.10 | 0 | 12:28 | 6.89  |
| FSD18           | STORAGE  | 2.78 | 5.64  | 208.84 | 0 | 12:38 | 5.63  |
| FSD20           | STORAGE  | 0.04 | 1.69  | 325.89 | 0 | 12:25 | 1.69  |
| FSD21           | STORAGE  | 0.77 | 4.60  | 336.80 | 0 | 12:44 | 4.59  |
| FSD22           | STORAGE  | 1.58 | 5.16  | 288.36 | 0 | 12:42 | 5.16  |
| FSD23           | STORAGE  | 0.85 | 4.98  | 300.98 | 0 | 12:48 | 4.97  |
| FSD27           | STORAGE  | 3.46 | 7.24  | 264.44 | 0 | 12:54 | 7.24  |
| FSD72           | STORAGE  | 1.38 | 4.75  | 344.95 | 0 | 12:30 | 4.75  |
| FSDE1           | STORAGE  | 3.09 | 6.59  | 272.59 | 0 | 13:57 | 6.59  |
| FSDE2           | STORAGE  | 0.92 | 6.37  | 236.37 | 0 | 13:59 | 6.37  |
| FSDE3           | STORAGE  | 3.20 | 7.47  | 136.37 | 0 | 12:56 | 7.47  |
| FSDE4           | STORAGE  | 2.65 | 5.39  | 103.39 | 0 | 13:43 | 5.39  |
| FSDE5           | STORAGE  | 3.87 | 8.15  | 68.65  | 0 | 14:07 | 8.15  |
| PNDE7           | STORAGE  | 0.74 | 4.74  | 37.24  | 0 | 14:07 | 4.74  |
| FSDE6           | STORAGE  | 3.52 | 6.91  | 39.41  | 0 | 13:10 | 6.91  |
| PNDW3           | STORAGE  | 0.33 | 8.19  | 126.49 | 0 | 13:47 | 8.18  |
| EX_STOCK_POND_1 | STORAGE  | 6.83 | 10.87 | 152.87 | 0 | 13:19 | 10.87 |
| FSD12A          | STORAGE  | 4.34 | 7.66  | 164.66 | 0 | 12:30 | 7.66  |
| EX_STOCK_POND_2 | STORAGE  | 3.26 | 6.49  | 235.59 | 0 | 12:56 | 6.48  |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum    |                    | Lateral Inflow Volume | Total Inflow Volume | Flow Balance Error |
|-------|----------|------------|--------------------|-----------------------|---------------------|--------------------|
|       |          | Inflow CFS | Time of Occurrence |                       |                     |                    |
| 79    | JUNCTION | 0.00       | 18.60              | 0                     | 0.955               | 0.000              |
| 80    | JUNCTION | 0.00       | 16.00              | 0                     | 0.755               | 0.000              |
| 81    | JUNCTION | 0.00       | 1406.20            | 0                     | 51.8                | 0.000              |
| DP-1E | JUNCTION | 0.00       | 72.19              | 0                     | 4.42                | 0.000              |
| DP-21 | JUNCTION | 0.00       | 176.17             | 0                     | 19                  | 0.000              |

|               |          |        |         |   |       |       |       |           |
|---------------|----------|--------|---------|---|-------|-------|-------|-----------|
| DP-22         | JUNCTION | 0.00   | 156.50  | 0 | 12:18 | 0     | 15    | 0.000     |
| DP-25         | JUNCTION | 0.00   | 26.97   | 0 | 12:15 | 0     | 0.463 | 0.000     |
| DP-26         | JUNCTION | 0.00   | 53.15   | 0 | 13:12 | 0     | 3.9   | 0.000     |
| DP-2E         | JUNCTION | 0.00   | 135.61  | 0 | 12:26 | 0     | 9.38  | 0.000     |
| DP-3E         | JUNCTION | 0.00   | 175.35  | 0 | 12:41 | 0     | 16.2  | 0.000     |
| DP-4E         | JUNCTION | 0.00   | 184.86  | 0 | 12:42 | 0     | 20.6  | -0.000    |
| DP-53A        | JUNCTION | 0.00   | 1474.82 | 0 | 13:47 | 0     | 129   | 0.000     |
| DP-56         | JUNCTION | 0.00   | 124.70  | 0 | 14:07 | 0     | 29.1  | 0.000     |
| DP-60A        | JUNCTION | 0.00   | 1471.37 | 0 | 13:47 | 0     | 128   | 0.000     |
| DP-61         | JUNCTION | 0.00   | 1451.80 | 0 | 13:44 | 0     | 120   | 0.000     |
| DP-63         | JUNCTION | 0.00   | 1293.98 | 0 | 13:47 | 0     | 97.2  | 0.000     |
| DP-64         | JUNCTION | 0.00   | 238.16  | 0 | 12:15 | 0     | 5.55  | 0.000     |
| DP-68         | JUNCTION | 0.00   | 1785.56 | 0 | 13:18 | 0     | 92    | 0.000     |
| DP-69         | JUNCTION | 0.00   | 1532.12 | 0 | 12:58 | 0     | 58.1  | 0.000     |
| DP-70         | JUNCTION | 0.00   | 1408.68 | 0 | 12:54 | 0     | 53.2  | 0.000     |
| DP-71         | JUNCTION | 0.00   | 1389.51 | 0 | 12:52 | 0     | 51.5  | 0.000     |
| DP-72         | JUNCTION | 0.00   | 1285.42 | 0 | 12:49 | 0     | 45.4  | 0.000     |
| DP-73         | JUNCTION | 0.00   | 1257.44 | 0 | 12:48 | 0     | 44.2  | 0.000     |
| DP-74         | JUNCTION | 0.00   | 251.03  | 0 | 12:27 | 0     | 6.53  | -0.000    |
| DP-75         | JUNCTION | 0.00   | 754.29  | 0 | 12:37 | 0     | 24.7  | 0.000     |
| DP-77         | JUNCTION | 0.00   | 1201.19 | 0 | 12:44 | 0     | 41.3  | 0.000     |
| DP-78         | JUNCTION | 0.00   | 360.98  | 0 | 12:28 | 0     | 9.73  | -0.000    |
| DP-8          | JUNCTION | 0.00   | 125.47  | 0 | 14:09 | 0     | 30.4  | 0.001     |
| DP-87         | JUNCTION | 0.00   | 1613.16 | 0 | 13:03 | 0     | 66.5  | 0.000     |
| FSD9_OUTLET   | JUNCTION | 0.00   | 226.29  | 0 | 12:52 | 0     | 9.59  | 0.000     |
| FSDE1_Outlet  | JUNCTION | 0.00   | 13.77   | 0 | 13:57 | 0     | 1.71  | 0.000     |
| FSDE2_Outlet  | JUNCTION | 0.00   | 15.12   | 0 | 13:59 | 0     | 2.31  | 0.000     |
| FSDE4_Outlet  | JUNCTION | 0.00   | 4.17    | 0 | 13:43 | 0     | 2.02  | 0.000     |
| PNDW3_Outfall | JUNCTION | 0.00   | 0.00    | 0 | 00:00 | 0     | 0     | 0.000 gal |
| SC3-10        | JUNCTION | 41.33  | 41.33   | 0 | 12:15 | 0.874 | 0.874 | 0.000     |
| SC3-11A       | JUNCTION | 13.08  | 13.08   | 0 | 12:15 | 0.202 | 0.202 | 0.000     |
| SC3-11B       | JUNCTION | 208.20 | 208.20  | 0 | 12:15 | 5.6   | 5.6   | 0.000     |
| SC3-12        | JUNCTION | 129.44 | 129.44  | 0 | 12:15 | 3.61  | 3.61  | 0.000     |
| SC3-12A       | JUNCTION | 44.86  | 44.86   | 0 | 12:15 | 0.924 | 0.924 | 0.000     |
| SC3-13        | JUNCTION | 138.53 | 138.53  | 0 | 12:15 | 2.99  | 2.99  | 0.000     |
| SC3-14A       | JUNCTION | 373.37 | 373.37  | 0 | 12:15 | 9.72  | 9.72  | 0.000     |
| SC3-14B       | JUNCTION | 196.70 | 196.70  | 0 | 12:15 | 4.74  | 4.74  | 0.000     |
| SC3-15A       | JUNCTION | 102.43 | 102.43  | 0 | 12:25 | 3.36  | 3.36  | 0.000     |
| SC3-15B       | JUNCTION | 21.56  | 21.56   | 0 | 12:15 | 0.537 | 0.537 | 0.000     |
| SC3-16A       | JUNCTION | 523.16 | 523.16  | 0 | 12:15 | 13.6  | 13.6  | 0.000     |
| SC3-16B       | JUNCTION | 143.94 | 143.94  | 0 | 12:15 | 4.18  | 4.18  | 0.000     |
| SC3-17A       | JUNCTION | 76.60  | 76.60   | 0 | 12:15 | 1.71  | 1.71  | 0.000     |
| SC3-17B       | JUNCTION | 88.39  | 88.39   | 0 | 12:15 | 2.12  | 2.12  | 0.000     |
| SC3-18        | JUNCTION | 57.56  | 57.56   | 0 | 12:15 | 1.64  | 1.64  | 0.000     |
| SC3-18B       | JUNCTION | 11.91  | 11.91   | 0 | 12:25 | 0.507 | 0.507 | 0.000     |
| SC3-19        | JUNCTION | 205.45 | 205.45  | 0 | 12:25 | 5.34  | 5.34  | 0.000     |
| SC3-1A        | JUNCTION | 68.02  | 68.02   | 0 | 12:15 | 1.11  | 1.11  | 0.000     |
| SC3-20        | JUNCTION | 50.17  | 50.17   | 0 | 12:15 | 1.11  | 1.11  | 0.000     |
| SC3-21        | JUNCTION | 45.92  | 45.92   | 0 | 12:15 | 0.756 | 0.756 | 0.000     |
| SC3-22        | JUNCTION | 39.14  | 39.14   | 0 | 12:15 | 0.863 | 0.863 | 0.000     |
| SC3-23        | JUNCTION | 48.72  | 48.72   | 0 | 12:15 | 0.955 | 0.955 | 0.000     |
| SC3-24A       | JUNCTION | 37.09  | 37.09   | 0 | 12:20 | 1.04  | 1.04  | 0.000     |
| SC3-24B       | JUNCTION | 11.76  | 11.76   | 0 | 12:15 | 0.302 | 0.302 | 0.000     |
| SC3-25        | JUNCTION | 26.97  | 26.97   | 0 | 12:15 | 0.463 | 0.463 | 0.000     |
| SC3-26        | JUNCTION | 11.13  | 11.13   | 0 | 12:20 | 0.346 | 0.346 | 0.000     |
| SC3-27        | JUNCTION | 61.80  | 61.80   | 0 | 12:20 | 2.35  | 2.35  | 0.000     |
| SC3-5A        | JUNCTION | 135.50 | 135.50  | 0 | 12:15 | 2.59  | 2.59  | 0.000     |

|             |          |        |         |         |        |        |        |
|-------------|----------|--------|---------|---------|--------|--------|--------|
| SC3-5B      | JUNCTION | 181.48 | 181.48  | 0 12:15 | 3.92   | 3.92   | 0.000  |
| SC3-61      | JUNCTION | 63.67  | 63.67   | 0 12:20 | 1.66   | 1.66   | 0.000  |
| SC3-6A      | JUNCTION | 149.06 | 149.06  | 0 12:15 | 3.75   | 3.75   | -0.000 |
| SC3-6B      | JUNCTION | 90.70  | 90.70   | 0 12:15 | 2.01   | 2.01   | 0.000  |
| SC3-6C      | JUNCTION | 174.32 | 174.32  | 0 12:15 | 3.34   | 3.34   | 0.000  |
| SC3-7       | JUNCTION | 150.45 | 150.45  | 0 12:15 | 3.55   | 3.55   | 0.000  |
| SC3-72      | JUNCTION | 59.19  | 59.19   | 0 12:20 | 1.58   | 1.58   | 0.000  |
| SC3-73      | JUNCTION | 84.94  | 84.94   | 0 12:25 | 2.41   | 2.41   | 0.000  |
| SC3-74      | JUNCTION | 131.03 | 131.03  | 0 12:20 | 3.46   | 3.46   | 0.000  |
| SC3-75      | JUNCTION | 64.91  | 64.91   | 0 12:25 | 2.29   | 2.29   | 0.000  |
| SC3-76      | JUNCTION | 68.18  | 68.18   | 0 12:25 | 2.42   | 2.42   | 0.000  |
| SC3-77      | JUNCTION | 73.59  | 73.59   | 0 12:30 | 2.76   | 2.76   | 0.000  |
| SC3-78      | JUNCTION | 189.21 | 189.21  | 0 12:20 | 4.5    | 4.5    | 0.000  |
| SC3-79      | JUNCTION | 205.95 | 205.95  | 0 12:25 | 5.22   | 5.22   | 0.000  |
| SC3-8       | JUNCTION | 166.13 | 166.13  | 0 12:20 | 3.41   | 3.41   | 0.000  |
| SC3-80      | JUNCTION | 144.50 | 144.50  | 0 12:25 | 4.08   | 4.08   | 0.000  |
| SC3-81      | JUNCTION | 218.65 | 218.65  | 0 12:30 | 6.79   | 6.79   | 0.000  |
| SC3-82      | JUNCTION | 136.18 | 136.18  | 0 12:20 | 3.04   | 3.04   | 0.000  |
| SC3-88      | JUNCTION | 50.80  | 50.80   | 0 12:25 | 1.55   | 1.55   | 0.000  |
| SC3-89      | JUNCTION | 22.87  | 22.87   | 0 12:20 | 0.6    | 0.6    | 0.000  |
| SC3-9       | JUNCTION | 193.77 | 193.77  | 0 12:25 | 6.11   | 6.11   | 0.000  |
| SCE-1       | JUNCTION | 50.51  | 50.51   | 0 12:25 | 2      | 2      | 0.000  |
| SCE-10      | JUNCTION | 362.01 | 362.01  | 0 12:15 | 8.74   | 8.74   | 0.000  |
| SCE-11      | JUNCTION | 8.93   | 8.93    | 0 12:15 | 0.127  | 0.127  | 0.000  |
| SCE-13      | JUNCTION | 63.64  | 63.64   | 0 12:25 | 2.27   | 2.27   | 0.000  |
| SCE-14      | JUNCTION | 46.77  | 46.77   | 0 12:20 | 1.52   | 1.52   | 0.000  |
| SCE-15      | JUNCTION | 60.67  | 60.67   | 0 12:15 | 1.39   | 1.39   | 0.000  |
| SCE-2       | JUNCTION | 8.30   | 8.30    | 0 12:25 | 0.434  | 0.434  | 0.000  |
| SCE-3       | JUNCTION | 47.22  | 47.22   | 0 12:25 | 2.31   | 2.31   | 0.000  |
| SCE-4       | JUNCTION | 16.29  | 16.29   | 0 12:30 | 1.15   | 1.15   | 0.000  |
| SCE-5       | JUNCTION | 238.47 | 238.47  | 0 12:15 | 7.16   | 7.16   | 0.000  |
| SCE-6       | JUNCTION | 2.00   | 2.00    | 0 12:20 | 0.0949 | 0.0949 | 0.000  |
| SCE-7       | JUNCTION | 91.69  | 91.69   | 0 12:15 | 2.21   | 2.21   | 0.000  |
| SCE-8       | JUNCTION | 97.16  | 97.16   | 0 12:15 | 2.44   | 2.44   | 0.000  |
| SCE-9       | JUNCTION | 2.46   | 2.46    | 0 12:20 | 0.0947 | 0.0947 | 0.000  |
| SC3-12B     | JUNCTION | 10.70  | 10.70   | 0 12:20 | 0.435  | 0.435  | 0.000  |
| SC3-13A     | JUNCTION | 20.28  | 20.28   | 0 12:20 | 0.736  | 0.736  | 0.000  |
| SC3_OUTFALL | OUTFALL  | 0.00   | 1474.82 | 0 13:47 | 0      | 129    | 0.000  |
| SCE_OUTFALL | OUTFALL  | 0.00   | 0.08    | 0 02:09 | 0      | 0.15   | 0.000  |
| FSD05       | STORAGE  | 0.00   | 135.50  | 0 12:15 | 0      | 2.59   | 0.001  |
| FSD06       | STORAGE  | 0.00   | 559.04  | 0 12:16 | 0      | 12.8   | 0.064  |
| FSD09       | STORAGE  | 0.00   | 327.53  | 0 12:30 | 0      | 9.6    | 0.088  |
| FSD1        | STORAGE  | 0.00   | 68.02   | 0 12:15 | 0      | 1.11   | 0.106  |
| FSD11B      | STORAGE  | 0.00   | 208.20  | 0 12:15 | 0      | 5.6    | -0.019 |
| FSD12       | STORAGE  | 0.00   | 129.44  | 0 12:15 | 0      | 3.61   | 0.064  |
| FSD13       | STORAGE  | 0.00   | 138.53  | 0 12:15 | 0      | 2.99   | 0.061  |
| FSD14A      | STORAGE  | 0.00   | 373.37  | 0 12:15 | 0      | 9.72   | 0.080  |
| FSD14B      | STORAGE  | 0.00   | 196.70  | 0 12:15 | 0      | 4.74   | 0.025  |
| FSD15B      | STORAGE  | 0.00   | 116.39  | 0 12:25 | 0      | 3.9    | 0.067  |
| FSD16A      | STORAGE  | 0.00   | 523.16  | 0 12:15 | 0      | 13.6   | 0.032  |
| FSD16B      | STORAGE  | 0.00   | 143.94  | 0 12:15 | 0      | 4.18   | 0.045  |
| FSD17A      | STORAGE  | 0.00   | 76.60   | 0 12:15 | 0      | 1.71   | 0.114  |
| FSD17B      | STORAGE  | 0.00   | 88.39   | 0 12:15 | 0      | 2.12   | 0.068  |
| FSD18       | STORAGE  | 0.00   | 57.56   | 0 12:15 | 0      | 1.64   | 0.089  |
| FSD20       | STORAGE  | 0.00   | 50.17   | 0 12:15 | 0      | 1.11   | 0.286  |
| FSD21       | STORAGE  | 0.00   | 45.92   | 0 12:15 | 0      | 0.756  | 0.079  |
| FSD22       | STORAGE  | 0.00   | 39.14   | 0 12:15 | 0      | 0.863  | 0.130  |



|                 |         |      |         |   |       |   |       |       |
|-----------------|---------|------|---------|---|-------|---|-------|-------|
| FSD23           | STORAGE | 0.00 | 48.72   | 0 | 12:15 | 0 | 0.955 | 0.051 |
| FSD27           | STORAGE | 0.00 | 105.16  | 0 | 12:20 | 0 | 3.77  | 0.106 |
| FSD72           | STORAGE | 0.00 | 59.19   | 0 | 12:20 | 0 | 1.58  | 0.547 |
| FSDE1           | STORAGE | 0.00 | 50.51   | 0 | 12:25 | 0 | 2     | 0.054 |
| FSDE2           | STORAGE | 0.00 | 47.22   | 0 | 12:25 | 0 | 2.31  | 0.045 |
| FSDE3           | STORAGE | 0.00 | 238.47  | 0 | 12:15 | 0 | 7.16  | 0.055 |
| FSDE4           | STORAGE | 0.00 | 91.69   | 0 | 12:15 | 0 | 2.21  | 0.014 |
| FSDE5           | STORAGE | 0.00 | 97.16   | 0 | 12:15 | 0 | 2.44  | 0.012 |
| PNDE7           | STORAGE | 0.00 | 212.81  | 0 | 12:45 | 0 | 29.1  | 0.026 |
| FSDE6           | STORAGE | 0.00 | 362.01  | 0 | 12:15 | 0 | 8.74  | 0.030 |
| PNDW3           | STORAGE | 0.00 | 1785.56 | 0 | 13:18 | 0 | 92    | 0.330 |
| EX_STOCK_POND_1 | STORAGE | 0.00 | 1590.60 | 0 | 13:11 | 0 | 66.5  | 0.106 |
| FSD12A          | STORAGE | 0.00 | 44.86   | 0 | 12:15 | 0 | 0.924 | 0.090 |
| EX_STOCK_POND_2 | STORAGE | 0.00 | 1408.68 | 0 | 12:54 | 0 | 53.2  | 0.107 |

\*\*\*\*\*  
Node Flooding Summary  
\*\*\*\*\*

Flooding refers to all water that overflows a node, whether it ponds or not.

| -----         |                       |                  |                                    |                               |                                |  |  |
|---------------|-----------------------|------------------|------------------------------------|-------------------------------|--------------------------------|--|--|
| Total Maximum |                       |                  |                                    |                               |                                |  |  |
| Node          | Maximum Hours Flooded | Maximum Rate CFS | Time of Max Occurrence days hr:min | Maximum Flood Volume 10^6 gal | Maximum Ponded Volume 1000 ft3 |  |  |
| -----         |                       |                  |                                    |                               |                                |  |  |
| DP-8          | 76.33                 | 125.39           | 0 14:09                            | 30.299                        | 0.000                          |  |  |
| FSD9_OUTLET   | 0.32                  | 10.71            | 0 12:52                            | 0.062                         | 0.000                          |  |  |
| SC3-19        | 0.82                  | 105.25           | 0 12:26                            | 1.212                         | 0.000                          |  |  |
| SC3-6A        | 0.06                  | 8.27             | 0 12:15                            | 0.007                         | 0.000                          |  |  |

\*\*\*\*\*  
Storage Volume Summary  
\*\*\*\*\*

| -----        |                         |               |            |                         |               |                                    |                     |  |
|--------------|-------------------------|---------------|------------|-------------------------|---------------|------------------------------------|---------------------|--|
| Storage Unit | Average Volume 1000 ft3 | Avg Evap Pcnt | Exfil Pcnt | Maximum Volume 1000 ft3 | Max Pcnt Full | Time of Max Occurrence days hr:min | Maximum Outflow CFS |  |
| -----        |                         |               |            |                         |               |                                    |                     |  |
| FSD05        | 60.384                  | 15            | 0 0        | 242.809                 | 60            | 0 14:01                            | 3.70                |  |
| FSD06        | 319.026                 | 27            | 0 0        | 969.143                 | 81            | 0 12:41                            | 139.30              |  |
| FSD09        | 61.830                  | 9             | 0 0        | 418.499                 | 58            | 0 12:51                            | 226.29              |  |
| FSD1         | 39.698                  | 11            | 0 0        | 89.475                  | 25            | 0 12:36                            | 22.08               |  |
| FSD11B       | 66.829                  | 15            | 0 0        | 285.901                 | 66            | 0 12:39                            | 77.00               |  |
| FSD12        | 59.489                  | 24            | 0 0        | 122.435                 | 49            | 0 12:25                            | 97.62               |  |
| FSD13        | 42.682                  | 12            | 0 0        | 198.011                 | 57            | 0 12:33                            | 43.80               |  |
| FSD14A       | 204.791                 | 13            | 0 0        | 664.350                 | 42            | 0 12:35                            | 160.77              |  |
| FSD14B       | 121.658                 | 24            | 0 0        | 406.673                 | 79            | 0 12:55                            | 19.30               |  |
| FSD15B       | 43.713                  | 8             | 0 0        | 248.052                 | 44            | 0 13:11                            | 53.15               |  |
| FSD16A       | 279.037                 | 24            | 0 0        | 949.587                 | 81            | 0 12:44                            | 128.30              |  |
| FSD16B       | 163.471                 | 32            | 0 0        | 342.046                 | 66            | 0 12:55                            | 28.20               |  |
| FSD17A       | 28.447                  | 5             | 0 0        | 127.606                 | 22            | 0 12:40                            | 23.77               |  |
| FSD17B       | 20.189                  | 11            | 0 0        | 114.961                 | 64            | 0 12:28                            | 49.19               |  |
| FSD18        | 31.162                  | 13            | 0 0        | 108.603                 | 47            | 0 12:38                            | 26.12               |  |

|                 |         |    |   |   |          |    |   |       |         |
|-----------------|---------|----|---|---|----------|----|---|-------|---------|
| FSD20           | 0.117   | 0  | 0 | 0 | 11.417   | 9  | 0 | 12:24 | 44.35   |
| FSD21           | 4.727   | 4  | 0 | 0 | 48.066   | 36 | 0 | 12:44 | 16.00   |
| FSD22           | 6.159   | 6  | 0 | 0 | 42.896   | 42 | 0 | 12:41 | 22.38   |
| FSD23           | 4.746   | 4  | 0 | 0 | 52.291   | 39 | 0 | 12:47 | 18.60   |
| FSD27           | 46.136  | 15 | 0 | 0 | 170.705  | 56 | 0 | 12:53 | 67.58   |
| FSD72           | 10.902  | 8  | 0 | 0 | 50.412   | 38 | 0 | 12:30 | 52.63   |
| FSDE1           | 66.611  | 23 | 0 | 0 | 179.257  | 63 | 0 | 13:57 | 13.77   |
| FSDE2           | 18.747  | 7  | 0 | 0 | 170.617  | 60 | 0 | 13:59 | 15.12   |
| FSDE3           | 178.233 | 23 | 0 | 0 | 589.341  | 77 | 0 | 12:55 | 54.74   |
| FSDE4           | 74.171  | 14 | 0 | 0 | 209.477  | 41 | 0 | 13:42 | 4.17    |
| FSDE5           | 87.007  | 33 | 0 | 0 | 227.505  | 86 | 0 | 14:06 | 3.80    |
| PNDE7           | 33.944  | 2  | 0 | 0 | 530.030  | 33 | 0 | 14:07 | 124.70  |
| FSDE6           | 244.267 | 19 | 0 | 0 | 837.415  | 66 | 0 | 13:10 | 32.54   |
| PNDW3           | 33.360  | 1  | 0 | 0 | 1642.043 | 64 | 0 | 13:47 | 1282.88 |
| EX_STOCK_POND_1 | 742.929 | 44 | 0 | 0 | 1453.866 | 86 | 0 | 13:19 | 1508.49 |
| FSD12A          | 20.362  | 22 | 0 | 0 | 56.649   | 62 | 0 | 12:30 | 22.86   |
| EX_STOCK_POND_2 | 161.216 | 41 | 0 | 0 | 354.715  | 89 | 0 | 12:56 | 1406.20 |

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| SC3_OUTFALL  | 98.22             | 62.37           | 1474.82         | 128.655                  |
| SCE_OUTFALL  | 97.82             | 0.07            | 0.08            | 0.150                    |
| System       | 98.02             | 62.44           | 1474.90         | 128.804                  |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum<br> Flow <br>CFS | Time of Max<br>Occurrence<br>days hr:min | Maximum<br> Veloc <br>ft/sec | Max/<br>Full<br>Flow | Max/<br>Full<br>Depth |
|--------|---------|--------------------------|--|------------------------------|----------------------|-----------------------|
| RT-1   | CONDUIT | 204.56                   | 0 12:42                                  | 5.02                         | 0.00                 | 0.09                  |
| RT-10A | CONDUIT | 107.65                   | 0 13:05                                  | 6.17                         | 1.08                 | 1.00                  |
| RT-10B | CONDUIT | 53.13                    | 0 13:13                                  | 13.73                        | 0.14                 | 0.25                  |
| RT-11A | CONDUIT | 1404.27                  | 0 12:58                                  | 7.77                         | 0.02                 | 0.18                  |
| RT-11B | CONDUIT | 1516.95                  | 0 13:03                                  | 7.30                         | 0.03                 | 0.20                  |
| RT-11C | CONDUIT | 1590.60                  | 0 13:11                                  | 5.11                         | 0.04                 | 0.23                  |
| RT-12A | CONDUIT | 156.87                   | 0 13:54                                  | 17.15                        | 0.82                 | 0.69                  |
| RT-12B | CONDUIT | 176.15                   | 0 13:55                                  | 22.74                        | 0.48                 | 0.49                  |
| RT-16  | CONDUIT | 149.03                   | 0 12:17                                  | 17.04                        | 1.07                 | 0.92                  |
| RT-17B | CONDUIT | 232.36                   | 0 13:02                                  | 20.16                        | 1.08                 | 0.92                  |
| RT-18  | CONDUIT | 1450.60                  | 0 13:47                                  | 7.07                         | 0.02                 | 0.17                  |
| RT-19  | CONDUIT | 62.83                    | 0 12:22                                  | 8.41                         | 0.21                 | 0.31                  |
| RT-1E  | CONDUIT | 13.77                    | 0 13:58                                  | 6.58                         | 0.11                 | 0.22                  |
| RT-2   | CONDUIT | 127.32                   | 0 12:40                                  | 4.59                         | 0.00                 | 0.07                  |

|        |         |         |   |       |       |      |      |
|--------|---------|---------|---|-------|-------|------|------|
| RT-20  | CONDUIT | 1471.31 | 0 | 13:47 | 10.87 | 0.01 | 0.12 |
| RT-21  | CONDUIT | 25.24   | 0 | 12:19 | 11.94 | 0.17 | 0.28 |
| RT-22  | CONDUIT | 18.78   | 0 | 13:34 | 13.54 | 0.20 | 0.31 |
| RT-2E  | CONDUIT | 71.66   | 0 | 12:28 | 10.77 | 0.54 | 0.52 |
| RT-3   | CONDUIT | 127.74  | 0 | 12:29 | 4.57  | 0.00 | 0.07 |
| RT-3E  | CONDUIT | 15.12   | 0 | 14:00 | 7.31  | 0.11 | 0.22 |
| RT-4   | CONDUIT | 241.31  | 0 | 12:35 | 5.08  | 0.00 | 0.10 |
| RT-4E  | CONDUIT | 134.77  | 0 | 12:33 | 12.94 | 0.96 | 0.78 |
| RT-5   | CONDUIT | 734.58  | 0 | 12:45 | 7.29  | 0.01 | 0.17 |
| RT-5E  | CONDUIT | 175.32  | 0 | 12:42 | 18.87 | 0.46 | 0.48 |
| RT-6   | CONDUIT | 195.99  | 0 | 12:32 | 5.44  | 0.00 | 0.08 |
| RT-6B  | CONDUIT | 311.09  | 0 | 12:45 | 5.28  | 0.00 | 0.11 |
| RT-6E  | CONDUIT | 4.17    | 0 | 13:47 | 5.01  | 0.03 | 0.12 |
| RT-7A  | CONDUIT | 22.77   | 0 | 12:21 | 12.90 | 0.09 | 0.20 |
| RT-7E  | CONDUIT | 184.81  | 0 | 12:42 | 13.07 | 0.50 | 0.50 |
| RT-8   | CONDUIT | 46.55   | 0 | 12:29 | 16.45 | 1.05 | 0.92 |
| RT-9A  | CONDUIT | 1191.48 | 0 | 12:49 | 6.78  | 0.02 | 0.17 |
| RT-9B  | CONDUIT | 1256.75 | 0 | 12:49 | 7.79  | 0.02 | 0.16 |
| RT-9C  | CONDUIT | 1282.87 | 0 | 12:52 | 7.26  | 0.02 | 0.17 |
| RT-9D  | CONDUIT | 1386.89 | 0 | 12:54 | 7.54  | 0.02 | 0.18 |
| RT-14  | CONDUIT | 1293.46 | 0 | 13:50 | 7.31  | 0.02 | 0.15 |
| 1      | DUMMY   | 131.03  | 0 | 12:20 |       |      |      |
| 2      | DUMMY   | 84.94   | 0 | 12:25 |       |      |      |
| 3      | DUMMY   | 64.91   | 0 | 12:25 |       |      |      |
| 4      | DUMMY   | 68.18   | 0 | 12:25 |       |      |      |
| 5      | DUMMY   | 189.21  | 0 | 12:20 |       |      |      |
| 6      | DUMMY   | 59.19   | 0 | 12:20 |       |      |      |
| 7      | DUMMY   | 73.59   | 0 | 12:30 |       |      |      |
| 8      | DUMMY   | 50.80   | 0 | 12:25 |       |      |      |
| 9      | DUMMY   | 50.51   | 0 | 12:25 |       |      |      |
| 10     | DUMMY   | 8.30    | 0 | 12:25 |       |      |      |
| 11     | DUMMY   | 11.13   | 0 | 12:20 |       |      |      |
| 12     | DUMMY   | 61.80   | 0 | 12:20 |       |      |      |
| 13     | DUMMY   | 48.72   | 0 | 12:15 |       |      |      |
| 14     | DUMMY   | 45.92   | 0 | 12:15 |       |      |      |
| 15     | DUMMY   | 26.97   | 0 | 12:15 |       |      |      |
| 16     | DUMMY   | 11.76   | 0 | 12:15 |       |      |      |
| 17     | DUMMY   | 39.14   | 0 | 12:15 |       |      |      |
| 18     | DUMMY   | 88.39   | 0 | 12:15 |       |      |      |
| 20     | DUMMY   | 50.17   | 0 | 12:15 |       |      |      |
| 22     | DUMMY   | 196.70  | 0 | 12:15 |       |      |      |
| 24     | DUMMY   | 373.37  | 0 | 12:15 |       |      |      |
| 25     | DUMMY   | 138.53  | 0 | 12:15 |       |      |      |
| 27     | DUMMY   | 91.69   | 0 | 12:15 |       |      |      |
| 28     | DUMMY   | 97.16   | 0 | 12:15 |       |      |      |
| 29     | DUMMY   | 238.47  | 0 | 12:15 |       |      |      |
| 30     | DUMMY   | 143.94  | 0 | 12:15 |       |      |      |
| 34     | DUMMY   | 57.56   | 0 | 12:15 |       |      |      |
| 36     | DUMMY   | 47.22   | 0 | 12:25 |       |      |      |
| 37     | DUMMY   | 16.29   | 0 | 12:30 |       |      |      |
| 38     | DUMMY   | 193.77  | 0 | 12:25 |       |      |      |
| RT-17A | CONDUIT | 144.63  | 0 | 12:33 | 6.48  | 0.00 | 0.10 |
| 39     | DUMMY   | 102.43  | 0 | 12:25 |       |      |      |
| 40     | DUMMY   | 21.56   | 0 | 12:15 |       |      |      |
| 42     | DUMMY   | 129.44  | 0 | 12:15 |       |      |      |
| 44     | DUMMY   | 8.93    | 0 | 12:15 |       |      |      |
| 45     | DUMMY   | 2.46    | 0 | 12:20 |       |      |      |

|                         |         |         |   |       |       |      |      |  |
|-------------------------|---------|---------|---|-------|-------|------|------|--|
| 46                      | DUMMY   | 2.00    | 0 | 12:20 |       |      |      |  |
| 47                      | DUMMY   | 46.77   | 0 | 12:20 |       |      |      |  |
| 48                      | DUMMY   | 63.64   | 0 | 12:25 |       |      |      |  |
| 51                      | DUMMY   | 362.01  | 0 | 12:15 |       |      |      |  |
| 54                      | DUMMY   | 208.20  | 0 | 12:15 |       |      |      |  |
| 56                      | DUMMY   | 13.08   | 0 | 12:15 |       |      |      |  |
| 58                      | CONDUIT | 1785.56 | 0 | 13:18 | 14.16 | 0.01 | 0.12 |  |
| 63                      | DUMMY   | 135.50  | 0 | 12:15 |       |      |      |  |
| 65                      | DUMMY   | 68.02   | 0 | 12:15 |       |      |      |  |
| 67                      | DUMMY   | 1474.82 | 0 | 13:47 |       |      |      |  |
| RT-15A                  | CONDUIT | 149.34  | 0 | 12:16 | 19.92 | 0.64 | 0.58 |  |
| RT-15B                  | CONDUIT | 236.71  | 0 | 12:16 | 20.36 | 0.39 | 0.43 |  |
| 69                      | DUMMY   | 174.32  | 0 | 12:15 |       |      |      |  |
| 70                      | DUMMY   | 90.70   | 0 | 12:15 |       |      |      |  |
| RT-25                   | CONDUIT | 124.68  | 0 | 14:11 | 4.70  | 0.01 | 0.17 |  |
| 71                      | CONDUIT | 0.08    | 0 | 02:09 | 0.10  | 1.08 | 1.00 |  |
| 74                      | DUMMY   | 41.33   | 0 | 12:15 |       |      |      |  |
| 75                      | DUMMY   | 37.09   | 0 | 12:20 |       |      |      |  |
| 77                      | DUMMY   | 181.48  | 0 | 12:15 |       |      |      |  |
| 78                      | DUMMY   | 76.60   | 0 | 12:15 |       |      |      |  |
| 79                      | DUMMY   | 523.16  | 0 | 12:15 |       |      |      |  |
| 80                      | CONDUIT | 16.04   | 0 | 13:18 | 16.32 | 0.16 | 0.27 |  |
| 81                      | DUMMY   | 44.86   | 0 | 12:15 |       |      |      |  |
| 82                      | DUMMY   | 60.67   | 0 | 12:15 |       |      |      |  |
| 83                      | DUMMY   | 11.91   | 0 | 12:25 |       |      |      |  |
| 84                      | DUMMY   | 1408.68 | 0 | 12:54 |       |      |      |  |
| 85                      | DUMMY   | 10.70   | 0 | 12:20 |       |      |      |  |
| 86                      | DUMMY   | 20.28   | 0 | 12:20 |       |      |      |  |
| FSD01_Outlet            | DUMMY   | 22.08   | 0 | 12:36 |       |      |      |  |
| FSD05_Outlet            | DUMMY   | 3.70    | 0 | 12:08 |       |      |      |  |
| FSD06_Outlet            | DUMMY   | 139.30  | 0 | 12:19 |       |      |      |  |
| FSD11B_Outlet           | DUMMY   | 77.00   | 0 | 12:05 |       |      |      |  |
| FSD12_Outlet            | DUMMY   | 97.62   | 0 | 12:26 |       |      |      |  |
| FSD13_Outlet            | DUMMY   | 43.80   | 0 | 12:15 |       |      |      |  |
| FSD14A_Outlet           | DUMMY   | 160.77  | 0 | 12:35 |       |      |      |  |
| FSD14B_Outlet           | DUMMY   | 19.30   | 0 | 12:00 |       |      |      |  |
| FSD15B_Outlet           | DUMMY   | 53.15   | 0 | 13:12 |       |      |      |  |
| FSD16A_Outlet           | DUMMY   | 128.30  | 0 | 12:13 |       |      |      |  |
| FSD16B_Outlet           | DUMMY   | 28.20   | 0 | 12:18 |       |      |      |  |
| FSD17B_Outlet           | DUMMY   | 49.19   | 0 | 12:28 |       |      |      |  |
| FSD18_Outlet            | DUMMY   | 26.12   | 0 | 12:38 |       |      |      |  |
| FSD21_Outlet            | DUMMY   | 16.00   | 0 | 12:20 |       |      |      |  |
| FSD22_Outlet            | DUMMY   | 22.38   | 0 | 12:42 |       |      |      |  |
| FSD72_Outlet            | DUMMY   | 52.63   | 0 | 12:30 |       |      |      |  |
| FSD9_Outlet             | DUMMY   | 226.29  | 0 | 12:52 |       |      |      |  |
| FSDE2_Outlet            | DUMMY   | 15.12   | 0 | 13:59 |       |      |      |  |
| FSDE3_Outlet            | DUMMY   | 54.74   | 0 | 12:56 |       |      |      |  |
| FSDE4_Outlet            | DUMMY   | 4.17    | 0 | 13:43 |       |      |      |  |
| FSDE5_Outlet            | DUMMY   | 3.80    | 0 | 12:34 |       |      |      |  |
| FSDE6_Outlet            | DUMMY   | 32.54   | 0 | 13:10 |       |      |      |  |
| FSDE1_Outlet            | DUMMY   | 13.77   | 0 | 13:57 |       |      |      |  |
| PNDE7_Outlet            | DUMMY   | 124.70  | 0 | 14:07 |       |      |      |  |
| FSD17A_Outlet           | DUMMY   | 23.77   | 0 | 12:40 |       |      |      |  |
| PNDW3_Outlet            | DUMMY   | 1282.88 | 0 | 13:47 |       |      |      |  |
| FSD27_Outlet            | DUMMY   | 67.58   | 0 | 12:54 |       |      |      |  |
| EX_STOCK_POND_1_OUTFALL | DUMMY   | 1508.49 | 0 | 13:19 |       |      |      |  |
| FSD23_Outlet            | DUMMY   | 18.60   | 0 | 12:16 |       |      |      |  |

FSD12A\_Outlet DUMMY 22.86 0 12:30  
 EX\_STOCK\_POND\_2\_OUTLET DUMMY 1406.20 0 12:56

\*\*\*\*\*  
 Conduit Surcharge Summary  
 \*\*\*\*\*

| Conduit | Hours                  |          | Hours      |          | Capacity    |         |
|---------|------------------------|----------|------------|----------|-------------|---------|
|         | ----- Hours Full ----- | -----    | Above Full | Dnstream |             |         |
|         | Both Ends              | Upstream |            |          | Normal Flow | Limited |
| RT-10A  | 0.81                   | 0.81     | 0.81       | 0.86     | 0.81        |         |
| RT-16   | 0.05                   | 0.05     | 0.05       | 0.05     | 0.05        |         |
| RT-17B  | 0.31                   | 0.31     | 0.31       | 0.30     | 0.31        |         |
| RT-8    | 0.14                   | 0.14     | 0.14       | 0.14     | 0.14        |         |
| 71      | 76.33                  | 76.33    | 76.33      | 0.04     | 76.33       |         |

Analysis begun on: Thu Mar 24 10:13:31 2022  
 Analysis ended on: Thu Mar 24 10:13:32 2022  
 Total elapsed time: 00:00:01

Sterling Ranch 2022 MDDP Amendment  
100-YR Type II Storm

**NOTE: These warnings are generated from using 1 foot dummy conduits between basin nodes and detention ponds to ensure there is no additional travel time between the bottom of the basin and the detention pond, except where conveyed by a channel.**

WARNING 04: minimum elevation drop used for Conduit 1  
WARNING 04: minimum elevation drop used for Conduit 2  
WARNING 04: minimum elevation drop used for Conduit 3  
WARNING 04: minimum elevation drop used for Conduit 4  
WARNING 04: minimum elevation drop used for Conduit 5  
WARNING 04: minimum elevation drop used for Conduit 6  
WARNING 04: minimum elevation drop used for Conduit 7  
WARNING 04: minimum elevation drop used for Conduit 8  
WARNING 04: minimum elevation drop used for Conduit 9  
WARNING 04: minimum elevation drop used for Conduit 10  
WARNING 04: minimum elevation drop used for Conduit 11  
WARNING 04: minimum elevation drop used for Conduit 12  
WARNING 04: minimum elevation drop used for Conduit 14  
WARNING 04: minimum elevation drop used for Conduit 15  
WARNING 04: minimum elevation drop used for Conduit 16  
WARNING 04: minimum elevation drop used for Conduit 17  
WARNING 04: minimum elevation drop used for Conduit 18  
WARNING 04: minimum elevation drop used for Conduit 20  
WARNING 04: minimum elevation drop used for Conduit 22  
WARNING 04: minimum elevation drop used for Conduit 27  
WARNING 04: minimum elevation drop used for Conduit 28  
WARNING 04: minimum elevation drop used for Conduit 29  
WARNING 04: minimum elevation drop used for Conduit 30  
WARNING 04: minimum elevation drop used for Conduit 34  
WARNING 04: minimum elevation drop used for Conduit 36  
WARNING 04: minimum elevation drop used for Conduit 37  
WARNING 04: minimum elevation drop used for Conduit 38  
WARNING 04: minimum elevation drop used for Conduit 39  
WARNING 04: minimum elevation drop used for Conduit 40  
WARNING 04: minimum elevation drop used for Conduit 44  
WARNING 04: minimum elevation drop used for Conduit 45  
WARNING 04: minimum elevation drop used for Conduit 46  
WARNING 04: minimum elevation drop used for Conduit 47  
WARNING 04: minimum elevation drop used for Conduit 48  
WARNING 04: minimum elevation drop used for Conduit 51  
WARNING 04: minimum elevation drop used for Conduit 54  
WARNING 08: elevation drop exceeds length for Conduit 56  
WARNING 04: minimum elevation drop used for Conduit 63  
WARNING 04: minimum elevation drop used for Conduit 65  
WARNING 04: minimum elevation drop used for Conduit 67  
WARNING 04: minimum elevation drop used for Conduit 69  
WARNING 04: minimum elevation drop used for Conduit 70  
WARNING 04: minimum elevation drop used for Conduit 71  
WARNING 04: minimum elevation drop used for Conduit 74  
WARNING 04: minimum elevation drop used for Conduit 75  
WARNING 08: elevation drop exceeds length for Conduit 77  
WARNING 04: minimum elevation drop used for Conduit 78  
WARNING 04: minimum elevation drop used for Conduit 79  
WARNING 04: minimum elevation drop used for Conduit 82

WARNING 04: minimum elevation drop used for Conduit 83  
 WARNING 04: minimum elevation drop used for Conduit 85  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12\_Outlet  
 WARNING 10: crest elevation raised to downstream invert for regulator Link FSD12A\_Outlet

\*\*\*\*\*  
 NOTE: The summary statistics displayed in this report are based on results found at every computational time step, not just on results from each reporting time step.  
 \*\*\*\*\*

\*\*\*\*\*  
 Analysis Options  
 \*\*\*\*\*

Flow Units ..... CFS  
 Process Models:  
 Rainfall/Runoff ..... NO  
 RDII ..... NO  
 Snowmelt ..... NO  
 Groundwater ..... NO  
 Flow Routing ..... YES  
 Ponding Allowed ..... NO  
 Water Quality ..... NO  
 Flow Routing Method ..... KINWAVE  
 Starting Date ..... 01/01/2005 00:00:00  
 Ending Date ..... 01/04/2005 06:00:00  
 Antecedent Dry Days ..... 0.0  
 Report Time Step ..... 00:05:00  
 Routing Time Step ..... 30.00 sec

|                             | Volume    | Volume              |
|-----------------------------|-----------|---------------------|
| Flow Routing Continuity     | acre-feet | 10 <sup>6</sup> gal |
| *****                       | -----     | -----               |
| Dry Weather Inflow .....    | 0.000     | 0.000               |
| Wet Weather Inflow .....    | 0.000     | 0.000               |
| Groundwater Inflow .....    | 0.000     | 0.000               |
| RDII Inflow .....           | 0.000     | 0.000               |
| External Inflow .....       | 612.160   | 199.482             |
| External Outflow .....      | 453.902   | 147.911             |
| Flooding Loss .....         | 113.259   | 36.907              |
| Evaporation Loss .....      | 0.000     | 0.000               |
| Exfiltration Loss .....     | 0.000     | 0.000               |
| Initial Stored Volume ..... | 0.000     | 0.000               |
| Final Stored Volume .....   | 46.554    | 15.170              |
| Continuity Error (%) .....  | -0.254    |                     |

\*\*\*\*\*  
 Highest Flow Instability Indexes  
 \*\*\*\*\*

- Link RT-14 (61)
- Link PNDW3\_Outlet (61)
- Link RT-18 (61)
- Link RT-20 (60)
- Link 67 (60)

\*\*\*\*\*

Routing Time Step Summary

\*\*\*\*\*

Minimum Time Step : 30.00 sec  
Average Time Step : 30.00 sec  
Maximum Time Step : 30.00 sec  
Percent in Steady State : 0.00  
Average Iterations per Step : 1.00  
Percent Not Converging : 0.00

\*\*\*\*\*

Node Depth Summary

\*\*\*\*\*

| Node          | Type     | Average Depth<br>Feet | Maximum Depth<br>Feet | Maximum HGL<br>Feet | Time of Occurrence<br>days hr:min | Max Reported<br>Max Depth<br>Feet |
|---------------|----------|-----------------------|-----------------------|---------------------|-----------------------------------|-----------------------------------|
| 79            | JUNCTION | 0.08                  | 0.92                  | 295.92              | 0 12:14                           | 0.92                              |
| 80            | JUNCTION | 0.07                  | 0.81                  | 331.81              | 0 12:18                           | 0.81                              |
| 81            | JUNCTION | 0.16                  | 3.85                  | 232.85              | 0 12:55                           | 3.85                              |
| DP-1E         | JUNCTION | 0.23                  | 2.32                  | 261.22              | 0 12:25                           | 2.31                              |
| DP-21         | JUNCTION | 0.35                  | 2.76                  | 186.96              | 0 14:14                           | 2.75                              |
| DP-22         | JUNCTION | 0.35                  | 2.75                  | 226.95              | 0 12:15                           | 2.75                              |
| DP-25         | JUNCTION | 0.03                  | 1.07                  | 333.27              | 0 12:15                           | 1.06                              |
| DP-26         | JUNCTION | 0.17                  | 1.43                  | 200.63              | 0 13:07                           | 1.43                              |
| DP-2E         | JUNCTION | 0.32                  | 4.00                  | 222.90              | 0 12:19                           | 4.00                              |
| DP-3E         | JUNCTION | 0.39                  | 3.72                  | 132.62              | 0 12:42                           | 3.52                              |
| DP-4E         | JUNCTION | 0.54                  | 3.44                  | 63.94               | 0 12:43                           | 3.41                              |
| DP-53A        | JUNCTION | 0.26                  | 2.79                  | 2.79                | 0 13:43                           | 2.78                              |
| DP-56         | JUNCTION | 0.46                  | 1.78                  | 33.78               | 0 14:13                           | 1.78                              |
| DP-60A        | JUNCTION | 0.35                  | 3.83                  | 26.03               | 0 13:43                           | 3.82                              |
| DP-61         | JUNCTION | 0.36                  | 4.00                  | 67.20               | 0 12:45                           | 4.00                              |
| DP-63         | JUNCTION | 0.28                  | 3.36                  | 101.56              | 0 13:40                           | 3.36                              |
| DP-64         | JUNCTION | 0.12                  | 2.77                  | 95.97               | 0 12:15                           | 2.74                              |
| DP-68         | JUNCTION | 0.32                  | 2.55                  | 120.95              | 0 13:16                           | 2.55                              |
| DP-69         | JUNCTION | 0.23                  | 5.00                  | 208.20              | 0 12:16                           | 5.00                              |
| DP-70         | JUNCTION | 0.16                  | 3.90                  | 233.10              | 0 12:53                           | 3.89                              |
| DP-71         | JUNCTION | 0.16                  | 3.90                  | 261.10              | 0 12:51                           | 3.90                              |
| DP-72         | JUNCTION | 0.13                  | 3.81                  | 287.01              | 0 12:48                           | 3.80                              |
| DP-73         | JUNCTION | 0.15                  | 3.80                  | 304.00              | 0 12:48                           | 3.80                              |
| DP-74         | JUNCTION | 0.06                  | 2.11                  | 499.31              | 0 12:27                           | 2.10                              |
| DP-75         | JUNCTION | 0.11                  | 3.70                  | 435.90              | 0 12:36                           | 3.69                              |
| DP-77         | JUNCTION | 0.13                  | 3.82                  | 344.02              | 0 12:43                           | 3.81                              |
| DP-78         | JUNCTION | 0.08                  | 2.55                  | 464.75              | 0 12:28                           | 2.55                              |
| DP-8          | JUNCTION | 9.80                  | 10.00                 | 10.00               | 0 01:33                           | 10.00                             |
| DP-87         | JUNCTION | 0.27                  | 5.11                  | 162.31              | 0 13:01                           | 5.10                              |
| FSD9_OUTLET   | JUNCTION | 0.24                  | 4.00                  | 143.20              | 0 12:35                           | 4.00                              |
| FSDE1_Outlet  | JUNCTION | 0.18                  | 1.13                  | 266.03              | 0 13:41                           | 1.13                              |
| FSDE2_Outlet  | JUNCTION | 0.15                  | 1.05                  | 229.95              | 0 13:47                           | 1.05                              |
| FSDE4_Outlet  | JUNCTION | 0.21                  | 0.51                  | 98.11               | 0 13:35                           | 0.51                              |
| PNDW3_Outfall | JUNCTION | 0.00                  | 0.00                  | 118.20              | 0 00:00                           | 0.00                              |
| SC3-10        | JUNCTION | 0.00                  | 0.00                  | 63.20               | 0 00:00                           | 0.00                              |
| SC3-11A       | JUNCTION | 0.00                  | 0.00                  | 98.20               | 0 00:00                           | 0.00                              |



|         |          |      |      |        |         |      |
|---------|----------|------|------|--------|---------|------|
| SC3-11B | JUNCTION | 0.00 | 0.00 | 98.20  | 0 00:00 | 0.00 |
| SC3-12  | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-12A | JUNCTION | 0.00 | 0.00 | 157.20 | 0 00:00 | 0.00 |
| SC3-13  | JUNCTION | 0.00 | 0.00 | 118.60 | 0 00:00 | 0.00 |
| SC3-14A | JUNCTION | 0.00 | 0.00 | 118.50 | 0 00:00 | 0.00 |
| SC3-14B | JUNCTION | 0.00 | 0.00 | 184.20 | 0 00:00 | 0.00 |
| SC3-15A | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-15B | JUNCTION | 0.00 | 0.00 | 199.20 | 0 00:00 | 0.00 |
| SC3-16A | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-16B | JUNCTION | 0.00 | 0.00 | 224.20 | 0 00:00 | 0.00 |
| SC3-17A | JUNCTION | 0.00 | 0.00 | 230.20 | 0 00:00 | 0.00 |
| SC3-17B | JUNCTION | 0.00 | 0.00 | 258.20 | 0 00:00 | 0.00 |
| SC3-18  | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-18B | JUNCTION | 0.00 | 0.00 | 203.20 | 0 00:00 | 0.00 |
| SC3-19  | JUNCTION | 0.13 | 5.00 | 250.20 | 0 12:11 | 5.00 |
| SC3-1A  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-20  | JUNCTION | 0.00 | 0.00 | 324.20 | 0 00:00 | 0.00 |
| SC3-21  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-22  | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-23  | JUNCTION | 0.00 | 0.00 | 295.20 | 0 00:00 | 0.00 |
| SC3-24A | JUNCTION | 0.00 | 0.00 | 300.20 | 0 00:00 | 0.00 |
| SC3-24B | JUNCTION | 0.00 | 0.00 | 283.20 | 0 00:00 | 0.00 |
| SC3-25  | JUNCTION | 0.00 | 0.00 | 332.20 | 0 00:00 | 0.00 |
| SC3-26  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-27  | JUNCTION | 0.00 | 0.00 | 257.20 | 0 00:00 | 0.00 |
| SC3-5A  | JUNCTION | 0.00 | 0.00 | 22.20  | 0 00:00 | 0.00 |
| SC3-5B  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SC3-61  | JUNCTION | 0.06 | 2.04 | 30.24  | 0 12:20 | 2.03 |
| SC3-6A  | JUNCTION | 0.13 | 3.50 | 90.70  | 0 12:11 | 3.50 |
| SC3-6B  | JUNCTION | 0.00 | 0.00 | 93.20  | 0 00:00 | 0.00 |
| SC3-6C  | JUNCTION | 0.00 | 0.00 | 63.20  | 0 00:00 | 0.00 |
| SC3-7   | JUNCTION | 0.11 | 2.49 | 119.69 | 0 12:15 | 2.46 |
| SC3-72  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-73  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-74  | JUNCTION | 0.00 | 0.00 | 497.20 | 0 00:00 | 0.00 |
| SC3-75  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-76  | JUNCTION | 0.00 | 0.00 | 432.20 | 0 00:00 | 0.00 |
| SC3-77  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-78  | JUNCTION | 0.00 | 0.00 | 462.20 | 0 00:00 | 0.00 |
| SC3-79  | JUNCTION | 0.05 | 1.81 | 564.01 | 0 12:25 | 1.81 |
| SC3-8   | JUNCTION | 0.04 | 2.28 | 249.48 | 0 12:20 | 2.26 |
| SC3-80  | JUNCTION | 0.05 | 1.63 | 553.83 | 0 12:25 | 1.63 |
| SC3-81  | JUNCTION | 0.05 | 1.97 | 534.17 | 0 12:30 | 1.97 |
| SC3-82  | JUNCTION | 0.03 | 1.58 | 563.78 | 0 12:20 | 1.56 |
| SC3-88  | JUNCTION | 0.00 | 0.00 | 340.20 | 0 00:00 | 0.00 |
| SC3-89  | JUNCTION | 0.02 | 0.86 | 376.06 | 0 12:20 | 0.86 |
| SC3-9   | JUNCTION | 0.00 | 0.00 | 139.20 | 0 00:00 | 0.00 |
| SCE-1   | JUNCTION | 0.00 | 0.00 | 266.00 | 0 00:00 | 0.00 |
| SCE-10  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-11  | JUNCTION | 0.00 | 0.00 | 32.50  | 0 00:00 | 0.00 |
| SCE-13  | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-14  | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-15  | JUNCTION | 0.00 | 0.00 | 0.00   | 0 00:00 | 0.00 |
| SCE-2   | JUNCTION | 0.00 | 0.00 | 258.90 | 0 00:00 | 0.00 |
| SCE-3   | JUNCTION | 0.00 | 0.00 | 230.00 | 0 00:00 | 0.00 |
| SCE-4   | JUNCTION | 0.00 | 0.00 | 218.90 | 0 00:00 | 0.00 |
| SCE-5   | JUNCTION | 0.00 | 0.00 | 128.90 | 0 00:00 | 0.00 |

|                 |          |      |       |        |   |       |       |
|-----------------|----------|------|-------|--------|---|-------|-------|
| SCE-6           | JUNCTION | 0.00 | 0.00  | 128.90 | 0 | 00:00 | 0.00  |
| SCE-7           | JUNCTION | 0.00 | 0.00  | 98.00  | 0 | 00:00 | 0.00  |
| SCE-8           | JUNCTION | 0.00 | 0.00  | 60.50  | 0 | 00:00 | 0.00  |
| SCE-9           | JUNCTION | 0.00 | 0.00  | 60.50  | 0 | 00:00 | 0.00  |
| SC3-12B         | JUNCTION | 0.00 | 0.00  | 157.20 | 0 | 00:00 | 0.00  |
| SC3-13A         | JUNCTION | 0.00 | 0.00  | 118.60 | 0 | 00:00 | 0.00  |
| SC3_OUTFALL     | OUTFALL  | 0.00 | 0.00  | 0.00   | 0 | 00:00 | 0.00  |
| SCE_OUTFALL     | OUTFALL  | 0.98 | 1.00  | 1.00   | 0 | 02:03 | 1.00  |
| FSD05           | STORAGE  | 3.67 | 7.12  | 29.32  | 0 | 14:14 | 7.12  |
| FSD06           | STORAGE  | 5.36 | 9.94  | 73.14  | 0 | 12:43 | 9.93  |
| FSD09           | STORAGE  | 2.55 | 8.44  | 147.64 | 0 | 12:52 | 8.43  |
| FSD1            | STORAGE  | 1.75 | 3.44  | 3.44   | 0 | 12:36 | 3.43  |
| FSD11B          | STORAGE  | 3.08 | 7.52  | 105.72 | 0 | 12:41 | 7.51  |
| FSD12           | STORAGE  | 4.41 | 6.63  | 163.63 | 0 | 12:28 | 6.62  |
| FSD13           | STORAGE  | 3.36 | 8.16  | 126.66 | 0 | 12:35 | 8.16  |
| FSD14A          | STORAGE  | 1.77 | 4.73  | 123.13 | 0 | 12:36 | 4.73  |
| FSD14B          | STORAGE  | 3.73 | 9.12  | 193.32 | 0 | 12:58 | 9.12  |
| FSD15B          | STORAGE  | 2.54 | 7.74  | 206.94 | 0 | 13:07 | 7.74  |
| FSD16A          | STORAGE  | 4.41 | 11.23 | 235.43 | 0 | 12:47 | 11.23 |
| FSD16B          | STORAGE  | 4.50 | 8.14  | 232.34 | 0 | 12:58 | 8.14  |
| FSD17A          | STORAGE  | 3.08 | 5.17  | 235.37 | 0 | 12:38 | 5.16  |
| FSD17B          | STORAGE  | 2.60 | 7.11  | 265.31 | 0 | 12:27 | 7.10  |
| FSD18           | STORAGE  | 2.81 | 5.86  | 209.06 | 0 | 12:38 | 5.85  |
| FSD20           | STORAGE  | 0.05 | 2.27  | 326.47 | 0 | 12:31 | 2.26  |
| FSD21           | STORAGE  | 0.80 | 5.30  | 337.50 | 0 | 12:48 | 5.30  |
| FSD22           | STORAGE  | 1.61 | 5.65  | 288.85 | 0 | 12:47 | 5.64  |
| FSD23           | STORAGE  | 0.88 | 5.77  | 301.77 | 0 | 12:52 | 5.77  |
| FSD27           | STORAGE  | 3.50 | 7.46  | 264.66 | 0 | 12:51 | 7.46  |
| FSD72           | STORAGE  | 1.39 | 4.90  | 345.10 | 0 | 12:30 | 4.90  |
| FSDE1           | STORAGE  | 3.12 | 6.88  | 272.88 | 0 | 13:41 | 6.87  |
| FSDE2           | STORAGE  | 0.95 | 6.65  | 236.65 | 0 | 13:47 | 6.65  |
| FSDE3           | STORAGE  | 3.25 | 7.82  | 136.72 | 0 | 12:52 | 7.81  |
| FSDE4           | STORAGE  | 2.75 | 5.77  | 103.77 | 0 | 13:35 | 5.77  |
| FSDE5           | STORAGE  | 4.09 | 8.73  | 69.23  | 0 | 14:20 | 8.73  |
| PNDE7           | STORAGE  | 0.81 | 5.71  | 38.21  | 0 | 14:13 | 5.71  |
| FSDE6           | STORAGE  | 3.58 | 7.35  | 39.85  | 0 | 13:06 | 7.35  |
| PNDW3           | STORAGE  | 0.37 | 9.46  | 127.76 | 0 | 13:45 | 9.46  |
| EX_STOCK_POND_1 | STORAGE  | 6.85 | 11.24 | 153.24 | 0 | 13:16 | 11.24 |
| FSD12A          | STORAGE  | 4.37 | 8.09  | 165.09 | 0 | 12:32 | 8.08  |
| EX_STOCK_POND_2 | STORAGE  | 3.28 | 6.81  | 235.91 | 0 | 12:55 | 6.81  |

\*\*\*\*\*

Node Inflow Summary

\*\*\*\*\*

| Node  | Type     | Maximum    |                    | Lateral Inflow Volume | Total Inflow Volume | Flow Balance Error |
|-------|----------|------------|--------------------|-----------------------|---------------------|--------------------|
|       |          | Inflow CFS | Time of Occurrence |                       |                     |                    |
| 79    | JUNCTION | 0.00       | 18.60              | 0                     | 1.1                 | 0.000              |
| 80    | JUNCTION | 0.00       | 16.00              | 0                     | 0.876               | 0.000              |
| 81    | JUNCTION | 0.00       | 1662.14            | 0                     | 60.7                | 0.000              |
| DP-1E | JUNCTION | 0.00       | 83.88              | 0                     | 5.2                 | 0.000              |
| DP-21 | JUNCTION | 0.00       | 176.17             | 0                     | 21.4                | 0.000              |

|               |          |        |         |   |       |       |       |           |
|---------------|----------|--------|---------|---|-------|-------|-------|-----------|
| DP-22         | JUNCTION | 0.00   | 156.50  | 0 | 12:15 | 0     | 16.8  | 0.000     |
| DP-25         | JUNCTION | 0.00   | 30.90   | 0 | 12:15 | 0     | 0.537 | 0.000     |
| DP-26         | JUNCTION | 0.00   | 68.04   | 0 | 13:07 | 0     | 4.56  | 0.000     |
| DP-2E         | JUNCTION | 0.00   | 157.53  | 0 | 12:27 | 0     | 10.9  | -0.000    |
| DP-3E         | JUNCTION | 0.00   | 221.76  | 0 | 12:42 | 0     | 18.5  | 0.000     |
| DP-4E         | JUNCTION | 0.00   | 230.91  | 0 | 12:43 | 0     | 23.4  | 0.000     |
| DP-53A        | JUNCTION | 0.00   | 1843.80 | 0 | 13:43 | 0     | 148   | 0.000     |
| DP-56         | JUNCTION | 0.00   | 145.69  | 0 | 14:13 | 0     | 32.9  | 0.000     |
| DP-60A        | JUNCTION | 0.00   | 1839.17 | 0 | 13:43 | 0     | 147   | 0.000     |
| DP-61         | JUNCTION | 0.00   | 1816.26 | 0 | 13:39 | 0     | 138   | 0.000     |
| DP-63         | JUNCTION | 0.00   | 1554.72 | 0 | 13:40 | 0     | 112   | 0.000     |
| DP-64         | JUNCTION | 0.00   | 264.76  | 0 | 12:15 | 0     | 6.15  | 0.000     |
| DP-68         | JUNCTION | 0.00   | 2095.47 | 0 | 13:16 | 0     | 107   | 0.000     |
| DP-69         | JUNCTION | 0.00   | 1795.11 | 0 | 12:57 | 0     | 67.6  | 0.000     |
| DP-70         | JUNCTION | 0.00   | 1665.91 | 0 | 12:53 | 0     | 62.1  | 0.000     |
| DP-71         | JUNCTION | 0.00   | 1642.96 | 0 | 12:51 | 0     | 60.2  | 0.000     |
| DP-72         | JUNCTION | 0.00   | 1527.19 | 0 | 12:48 | 0     | 53.2  | 0.000     |
| DP-73         | JUNCTION | 0.00   | 1497.12 | 0 | 12:47 | 0     | 51.8  | 0.000     |
| DP-74         | JUNCTION | 0.00   | 293.76  | 0 | 12:27 | 0     | 7.66  | 0.000     |
| DP-75         | JUNCTION | 0.00   | 887.87  | 0 | 12:36 | 0     | 29    | 0.000     |
| DP-77         | JUNCTION | 0.00   | 1423.89 | 0 | 12:43 | 0     | 48.4  | 0.000     |
| DP-78         | JUNCTION | 0.00   | 422.09  | 0 | 12:28 | 0     | 11.4  | 0.000     |
| DP-8          | JUNCTION | 0.00   | 147.14  | 0 | 13:34 | 0     | 34.5  | 0.001     |
| DP-87         | JUNCTION | 0.00   | 1903.95 | 0 | 13:01 | 0     | 77.2  | 0.000     |
| FSD9_OUTLET   | JUNCTION | 0.00   | 264.75  | 0 | 12:52 | 0     | 11.3  | 0.000     |
| FSDE1_Outlet  | JUNCTION | 0.00   | 21.81   | 0 | 13:41 | 0     | 2.03  | 0.000     |
| FSDE2_Outlet  | JUNCTION | 0.00   | 21.11   | 0 | 13:47 | 0     | 2.65  | 0.000     |
| FSDE4_Outlet  | JUNCTION | 0.00   | 4.91    | 0 | 13:35 | 0     | 2.24  | 0.000     |
| PNDW3_Outfall | JUNCTION | 0.00   | 0.00    | 0 | 00:00 | 0     | 0     | 0.000 gal |
| SC3-10        | JUNCTION | 48.66  | 48.66   | 0 | 12:15 | 1.03  | 1.03  | 0.000     |
| SC3-11A       | JUNCTION | 15.09  | 15.09   | 0 | 12:15 | 0.238 | 0.238 | 0.000     |
| SC3-11B       | JUNCTION | 231.81 | 231.81  | 0 | 12:15 | 6.2   | 6.2   | 0.000     |
| SC3-12        | JUNCTION | 144.67 | 144.67  | 0 | 12:15 | 4.01  | 4.01  | 0.000     |
| SC3-12A       | JUNCTION | 50.30  | 50.30   | 0 | 12:15 | 1.04  | 1.04  | 0.000     |
| SC3-13        | JUNCTION | 153.60 | 153.60  | 0 | 12:15 | 3.31  | 3.31  | 0.000     |
| SC3-14A       | JUNCTION | 417.25 | 417.25  | 0 | 12:15 | 10.8  | 10.8  | 0.000     |
| SC3-14B       | JUNCTION | 218.85 | 218.85  | 0 | 12:15 | 5.25  | 5.25  | 0.000     |
| SC3-15A       | JUNCTION | 119.86 | 119.86  | 0 | 12:25 | 3.97  | 3.97  | 0.000     |
| SC3-15B       | JUNCTION | 24.00  | 24.00   | 0 | 12:15 | 0.596 | 0.596 | 0.000     |
| SC3-16A       | JUNCTION | 582.23 | 582.23  | 0 | 12:15 | 15    | 15    | 0.000     |
| SC3-16B       | JUNCTION | 159.74 | 159.74  | 0 | 12:15 | 4.62  | 4.62  | 0.000     |
| SC3-17A       | JUNCTION | 85.60  | 85.60   | 0 | 12:15 | 1.91  | 1.91  | 0.000     |
| SC3-17B       | JUNCTION | 98.33  | 98.33   | 0 | 12:15 | 2.35  | 2.35  | 0.000     |
| SC3-18        | JUNCTION | 64.05  | 64.05   | 0 | 12:15 | 1.82  | 1.82  | 0.000     |
| SC3-18B       | JUNCTION | 13.95  | 13.95   | 0 | 12:25 | 0.597 | 0.597 | 0.000     |
| SC3-19        | JUNCTION | 239.67 | 239.67  | 0 | 12:25 | 6.28  | 6.28  | -0.000    |
| SC3-1A        | JUNCTION | 77.21  | 77.21   | 0 | 12:15 | 1.27  | 1.27  | 0.000     |
| SC3-20        | JUNCTION | 57.99  | 57.99   | 0 | 12:15 | 1.29  | 1.29  | 0.000     |
| SC3-21        | JUNCTION | 52.53  | 52.53   | 0 | 12:15 | 0.876 | 0.876 | 0.000     |
| SC3-22        | JUNCTION | 45.22  | 45.22   | 0 | 12:15 | 1.01  | 1.01  | 0.000     |
| SC3-23        | JUNCTION | 55.73  | 55.73   | 0 | 12:15 | 1.1   | 1.1   | 0.000     |
| SC3-24A       | JUNCTION | 42.98  | 42.98   | 0 | 12:20 | 1.21  | 1.21  | 0.000     |
| SC3-24B       | JUNCTION | 13.62  | 13.62   | 0 | 12:15 | 0.354 | 0.354 | 0.000     |
| SC3-25        | JUNCTION | 30.90  | 30.90   | 0 | 12:15 | 0.537 | 0.537 | 0.000     |
| SC3-26        | JUNCTION | 12.95  | 12.95   | 0 | 12:20 | 0.407 | 0.407 | 0.000     |
| SC3-27        | JUNCTION | 70.95  | 70.95   | 0 | 12:20 | 2.71  | 2.71  | 0.000     |
| SC3-5A        | JUNCTION | 150.82 | 150.82  | 0 | 12:15 | 2.87  | 2.87  | 0.000     |

|             |          |        |         |   |       |       |       |        |
|-------------|----------|--------|---------|---|-------|-------|-------|--------|
| SC3-5B      | JUNCTION | 203.13 | 203.13  | 0 | 12:15 | 4.36  | 4.36  | 0.000  |
| SC3-61      | JUNCTION | 74.61  | 74.61   | 0 | 12:20 | 1.95  | 1.95  | 0.000  |
| SC3-6A      | JUNCTION | 165.69 | 165.69  | 0 | 12:15 | 4.15  | 4.15  | 0.000  |
| SC3-6B      | JUNCTION | 101.25 | 101.25  | 0 | 12:15 | 2.23  | 2.23  | 0.000  |
| SC3-6C      | JUNCTION | 196.64 | 196.64  | 0 | 12:15 | 3.74  | 3.74  | 0.000  |
| SC3-7       | JUNCTION | 166.71 | 166.71  | 0 | 12:15 | 3.92  | 3.92  | 0.000  |
| SC3-72      | JUNCTION | 68.70  | 68.70   | 0 | 12:20 | 1.85  | 1.85  | 0.000  |
| SC3-73      | JUNCTION | 99.04  | 99.04   | 0 | 12:25 | 2.84  | 2.84  | 0.000  |
| SC3-74      | JUNCTION | 151.94 | 151.94  | 0 | 12:20 | 4.05  | 4.05  | 0.000  |
| SC3-75      | JUNCTION | 75.41  | 75.41   | 0 | 12:25 | 2.68  | 2.68  | 0.000  |
| SC3-76      | JUNCTION | 79.38  | 79.38   | 0 | 12:25 | 2.84  | 2.84  | 0.000  |
| SC3-77      | JUNCTION | 86.36  | 86.36   | 0 | 12:30 | 3.26  | 3.26  | 0.000  |
| SC3-78      | JUNCTION | 219.17 | 219.17  | 0 | 12:20 | 5.26  | 5.26  | 0.000  |
| SC3-79      | JUNCTION | 239.34 | 239.34  | 0 | 12:25 | 6.12  | 6.12  | 0.000  |
| SC3-8       | JUNCTION | 195.44 | 195.44  | 0 | 12:20 | 4.07  | 4.07  | 0.000  |
| SC3-80      | JUNCTION | 168.15 | 168.15  | 0 | 12:25 | 4.78  | 4.78  | 0.000  |
| SC3-81      | JUNCTION | 256.32 | 256.32  | 0 | 12:30 | 8.02  | 8.02  | 0.000  |
| SC3-82      | JUNCTION | 158.98 | 158.98  | 0 | 12:20 | 3.59  | 3.59  | 0.000  |
| SC3-88      | JUNCTION | 59.46  | 59.46   | 0 | 12:25 | 1.83  | 1.83  | 0.000  |
| SC3-89      | JUNCTION | 26.69  | 26.69   | 0 | 12:20 | 0.708 | 0.708 | 0.000  |
| SC3-9       | JUNCTION | 225.81 | 225.81  | 0 | 12:25 | 7.13  | 7.13  | 0.000  |
| SCE-1       | JUNCTION | 58.52  | 58.52   | 0 | 12:25 | 2.33  | 2.33  | 0.000  |
| SCE-10      | JUNCTION | 411.15 | 411.15  | 0 | 12:15 | 9.8   | 9.8   | 0.000  |
| SCE-11      | JUNCTION | 10.51  | 10.51   | 0 | 12:15 | 0.152 | 0.152 | 0.000  |
| SCE-13      | JUNCTION | 73.94  | 73.94   | 0 | 12:25 | 2.66  | 2.66  | 0.000  |
| SCE-14      | JUNCTION | 54.26  | 54.26   | 0 | 12:20 | 1.78  | 1.78  | 0.000  |
| SCE-15      | JUNCTION | 69.54  | 69.54   | 0 | 12:15 | 1.6   | 1.6   | 0.000  |
| SCE-2       | JUNCTION | 9.66   | 9.66    | 0 | 12:25 | 0.508 | 0.508 | 0.000  |
| SCE-3       | JUNCTION | 54.72  | 54.72   | 0 | 12:25 | 2.65  | 2.65  | 0.000  |
| SCE-4       | JUNCTION | 18.71  | 18.71   | 0 | 12:30 | 1.31  | 1.31  | 0.000  |
| SCE-5       | JUNCTION | 265.69 | 265.69  | 0 | 12:15 | 7.92  | 7.92  | 0.000  |
| SCE-6       | JUNCTION | 2.39   | 2.39    | 0 | 12:20 | 0.113 | 0.113 | 0.000  |
| SCE-7       | JUNCTION | 101.34 | 101.34  | 0 | 12:15 | 2.44  | 2.44  | 0.000  |
| SCE-8       | JUNCTION | 106.61 | 106.61  | 0 | 12:15 | 2.67  | 2.67  | 0.000  |
| SCE-9       | JUNCTION | 2.94   | 2.94    | 0 | 12:15 | 0.113 | 0.113 | 0.000  |
| SC3-12B     | JUNCTION | 12.51  | 12.51   | 0 | 12:20 | 0.513 | 0.513 | 0.000  |
| SC3-13A     | JUNCTION | 23.70  | 23.70   | 0 | 12:20 | 0.867 | 0.867 | 0.000  |
| SC3_OUTFALL | OUTFALL  | 0.00   | 1843.80 | 0 | 13:43 | 0     | 148   | 0.000  |
| SCE_OUTFALL | OUTFALL  | 0.00   | 0.08    | 0 | 02:03 | 0     | 0.15  | 0.000  |
| FSD05       | STORAGE  | 0.00   | 150.82  | 0 | 12:15 | 0     | 2.87  | 0.001  |
| FSD06       | STORAGE  | 0.00   | 610.02  | 0 | 12:15 | 0     | 14.2  | 0.055  |
| FSD09       | STORAGE  | 0.00   | 386.00  | 0 | 12:30 | 0     | 11.3  | 0.071  |
| FSD1        | STORAGE  | 0.00   | 77.21   | 0 | 12:15 | 0     | 1.27  | 0.103  |
| FSD11B      | STORAGE  | 0.00   | 231.81  | 0 | 12:15 | 0     | 6.2   | -0.045 |
| FSD12       | STORAGE  | 0.00   | 144.67  | 0 | 12:15 | 0     | 4.01  | 0.047  |
| FSD13       | STORAGE  | 0.00   | 153.60  | 0 | 12:15 | 0     | 3.31  | 0.053  |
| FSD14A      | STORAGE  | 0.00   | 417.25  | 0 | 12:15 | 0     | 10.8  | 0.082  |
| FSD14B      | STORAGE  | 0.00   | 218.85  | 0 | 12:15 | 0     | 5.25  | 0.010  |
| FSD15B      | STORAGE  | 0.00   | 135.46  | 0 | 12:25 | 0     | 4.56  | 0.062  |
| FSD16A      | STORAGE  | 0.00   | 582.23  | 0 | 12:15 | 0     | 15    | 0.025  |
| FSD16B      | STORAGE  | 0.00   | 159.74  | 0 | 12:15 | 0     | 4.62  | 0.046  |
| FSD17A      | STORAGE  | 0.00   | 85.60   | 0 | 12:15 | 0     | 1.91  | 0.118  |
| FSD17B      | STORAGE  | 0.00   | 98.33   | 0 | 12:15 | 0     | 2.35  | 0.073  |
| FSD18       | STORAGE  | 0.00   | 64.05   | 0 | 12:15 | 0     | 1.82  | 0.078  |
| FSD20       | STORAGE  | 0.00   | 57.99   | 0 | 12:15 | 0     | 1.29  | 0.486  |
| FSD21       | STORAGE  | 0.00   | 52.53   | 0 | 12:15 | 0     | 0.876 | 0.021  |
| FSD22       | STORAGE  | 0.00   | 45.22   | 0 | 12:15 | 0     | 1.01  | 0.086  |

|                 |         |      |         |         |   |      |       |
|-----------------|---------|------|---------|---------|---|------|-------|
| FSD23           | STORAGE | 0.00 | 55.73   | 0 12:15 | 0 | 1.1  | 0.043 |
| FSD27           | STORAGE | 0.00 | 118.26  | 0 12:20 | 0 | 4.34 | 0.106 |
| FSD72           | STORAGE | 0.00 | 68.70   | 0 12:20 | 0 | 1.85 | 0.414 |
| FSDE1           | STORAGE | 0.00 | 58.52   | 0 12:25 | 0 | 2.33 | 0.070 |
| FSDE2           | STORAGE | 0.00 | 54.72   | 0 12:25 | 0 | 2.65 | 0.060 |
| FSDE3           | STORAGE | 0.00 | 265.69  | 0 12:15 | 0 | 7.92 | 0.052 |
| FSDE4           | STORAGE | 0.00 | 101.34  | 0 12:15 | 0 | 2.44 | 0.015 |
| FSDE5           | STORAGE | 0.00 | 106.61  | 0 12:15 | 0 | 2.67 | 0.011 |
| PNDE7           | STORAGE | 0.00 | 269.11  | 0 12:45 | 0 | 32.9 | 0.022 |
| FSDE6           | STORAGE | 0.00 | 411.15  | 0 12:15 | 0 | 9.8  | 0.039 |
| PNDW3           | STORAGE | 0.00 | 2095.47 | 0 13:16 | 0 | 107  | 0.293 |
| EX_STOCK_POND_1 | STORAGE | 0.00 | 1874.89 | 0 13:08 | 0 | 77.2 | 0.101 |
| FSD12A          | STORAGE | 0.00 | 50.30   | 0 12:15 | 0 | 1.04 | 0.072 |
| EX_STOCK_POND_2 | STORAGE | 0.00 | 1665.91 | 0 12:53 | 0 | 62.1 | 0.100 |

\*\*\*\*\*  
Node Flooding Summary  
\*\*\*\*\*

Flooding refers to all water that overflows a node, whether it ponds or not.

| -----       |               |             |             |          |          |  |
|-------------|---------------|-------------|-------------|----------|----------|--|
| Node        | Total Maximum |             |             |          |          |  |
|             | Maximum       | Time of Max | Flood       | Ponded   |          |  |
|             | Hours         | Rate        | Occurrence  | Volume   | Volume   |  |
| Node        | Flooded       | CFS         | days hr:min | 10^6 gal | 1000 ft3 |  |
| -----       |               |             |             |          |          |  |
| DP-2E       | 0.38          | 16.88       | 0 12:27     | 0.113    | 0.000    |  |
| DP-8        | 76.45         | 147.07      | 0 13:34     | 34.309   | 0.000    |  |
| FSD9_OUTLET | 0.70          | 49.16       | 0 12:52     | 0.600    | 0.000    |  |
| SC3-19      | 0.97          | 139.41      | 0 12:25     | 1.837    | 0.000    |  |
| SC3-6A      | 0.14          | 24.78       | 0 12:15     | 0.047    | 0.000    |  |

\*\*\*\*\*  
Storage Volume Summary  
\*\*\*\*\*

| -----        |          |          |       |         |          |             |             |        |
|--------------|----------|----------|-------|---------|----------|-------------|-------------|--------|
| Storage Unit | Average  | Avg Evap | Exfil | Maximum | Max      | Time of Max | Maximum     |        |
|              | Volume   | Pcnt     | Pcnt  | Volume  | Pcnt     | Occurrence  | Outflow     |        |
|              | 1000 ft3 | Full     | Loss  | Loss    | 1000 ft3 | Full        | days hr:min | CFS    |
| -----        |          |          |       |         |          |             |             |        |
| FSD05        | 70.954   | 17       | 0     | 0       | 271.332  | 67          | 0 14:13     | 3.70   |
| FSD06        | 324.634  | 27       | 0     | 0       | 1086.161 | 90          | 0 12:43     | 139.30 |
| FSD09        | 63.364   | 9        | 0     | 0       | 469.434  | 65          | 0 12:51     | 264.75 |
| FSD1         | 39.930   | 11       | 0     | 0       | 98.225   | 27          | 0 12:35     | 25.50  |
| FSD11B       | 68.270   | 16       | 0     | 0       | 322.109  | 74          | 0 12:41     | 77.00  |
| FSD12        | 59.953   | 24       | 0     | 0       | 132.379  | 53          | 0 12:27     | 103.10 |
| FSD13        | 43.678   | 13       | 0     | 0       | 221.356  | 64          | 0 12:34     | 43.80  |
| FSD14A       | 207.670  | 13       | 0     | 0       | 713.024  | 46          | 0 12:35     | 176.20 |
| FSD14B       | 126.354  | 25       | 0     | 0       | 449.615  | 87          | 0 12:57     | 19.30  |
| FSD15B       | 44.684   | 8        | 0     | 0       | 269.722  | 48          | 0 13:06     | 68.04  |
| FSD16A       | 284.759  | 24       | 0     | 0       | 1055.689 | 90          | 0 12:46     | 128.30 |
| FSD16B       | 165.632  | 32       | 0     | 0       | 381.330  | 74          | 0 12:57     | 28.20  |
| FSD17A       | 29.202   | 5        | 0     | 0       | 137.727  | 24          | 0 12:37     | 30.30  |
| FSD17B       | 20.841   | 12       | 0     | 0       | 120.886  | 67          | 0 12:26     | 58.89  |

|                 |         |    |   |   |          |    |   |       |         |
|-----------------|---------|----|---|---|----------|----|---|-------|---------|
| FSD18           | 31.810  | 14 | 0 | 0 | 115.687  | 50 | 0 | 12:37 | 29.78   |
| FSD20           | 0.166   | 0  | 0 | 0 | 17.544   | 13 | 0 | 12:31 | 44.35   |
| FSD21           | 5.027   | 4  | 0 | 0 | 59.169   | 44 | 0 | 12:47 | 16.00   |
| FSD22           | 6.349   | 6  | 0 | 0 | 50.862   | 50 | 0 | 12:46 | 23.12   |
| FSD23           | 5.148   | 4  | 0 | 0 | 65.571   | 49 | 0 | 12:51 | 18.60   |
| FSD27           | 47.026  | 16 | 0 | 0 | 180.168  | 60 | 0 | 12:51 | 78.35   |
| FSD72           | 11.001  | 8  | 0 | 0 | 52.733   | 39 | 0 | 12:29 | 62.10   |
| FSDE1           | 67.413  | 24 | 0 | 0 | 190.726  | 67 | 0 | 13:40 | 21.81   |
| FSDE2           | 19.611  | 7  | 0 | 0 | 181.810  | 64 | 0 | 13:46 | 21.11   |
| FSDE3           | 182.195 | 24 | 0 | 0 | 627.637  | 82 | 0 | 12:52 | 67.91   |
| FSDE4           | 78.757  | 15 | 0 | 0 | 230.731  | 45 | 0 | 13:35 | 4.91    |
| FSDE5           | 94.297  | 36 | 0 | 0 | 251.982  | 95 | 0 | 14:20 | 3.80    |
| PNDE7           | 43.299  | 3  | 0 | 0 | 706.739  | 44 | 0 | 14:12 | 145.69  |
| FSDE6           | 253.167 | 20 | 0 | 0 | 924.075  | 73 | 0 | 13:06 | 46.78   |
| PNDW3           | 43.653  | 2  | 0 | 0 | 2052.600 | 80 | 0 | 13:45 | 1486.64 |
| EX_STOCK_POND_1 | 745.407 | 44 | 0 | 0 | 1533.185 | 90 | 0 | 13:16 | 1786.01 |
| FSD12A          | 20.606  | 22 | 0 | 0 | 62.991   | 69 | 0 | 12:32 | 23.40   |
| EX_STOCK_POND_2 | 161.989 | 41 | 0 | 0 | 380.458  | 96 | 0 | 12:54 | 1662.14 |

\*\*\*\*\*

Outfall Loading Summary

\*\*\*\*\*

| Outfall Node | Flow Freq<br>Pcnt | Avg Flow<br>CFS | Max Flow<br>CFS | Total Volume<br>10^6 gal |
|--------------|-------------------|-----------------|-----------------|--------------------------|
| SC3_OUTFALL  | 98.32             | 71.54           | 1843.80         | 147.750                  |
| SCE_OUTFALL  | 97.97             | 0.07            | 0.08            | 0.150                    |
| System       | 98.15             | 71.62           | 1843.88         | 147.900                  |

\*\*\*\*\*

Link Flow Summary

\*\*\*\*\*

| Link   | Type    | Maximum  Flow <br>CFS | Time of Occurrence<br>days hr:min | Maximum  Veloc <br>ft/sec | Maximum Full Flow | Maximum Full Depth |
|--------|---------|-----------------------|-----------------------------------|---------------------------|-------------------|--------------------|
| RT-1   | CONDUIT | 241.28                | 0 12:41                           | 5.22                      | 0.00              | 0.10               |
| RT-10A | CONDUIT | 107.77                | 0 13:13                           | 6.20                      | 1.08              | 1.00               |
| RT-10B | CONDUIT | 68.02                 | 0 13:08                           | 14.73                     | 0.18              | 0.29               |
| RT-11A | CONDUIT | 1659.96               | 0 12:57                           | 8.14                      | 0.03              | 0.19               |
| RT-11B | CONDUIT | 1777.66               | 0 13:01                           | 7.60                      | 0.03              | 0.21               |
| RT-11C | CONDUIT | 1874.89               | 0 13:08                           | 5.34                      | 0.05              | 0.25               |
| RT-12A | CONDUIT | 156.87                | 0 14:14                           | 17.16                     | 0.82              | 0.69               |
| RT-12B | CONDUIT | 176.11                | 0 14:15                           | 22.74                     | 0.48              | 0.49               |
| RT-16  | CONDUIT | 150.78                | 0 12:20                           | 17.35                     | 1.08              | 1.00               |
| RT-17B | CONDUIT | 233.08                | 0 12:43                           | 20.54                     | 1.08              | 1.00               |
| RT-18  | CONDUIT | 1814.83               | 0 13:43                           | 7.59                      | 0.03              | 0.19               |
| RT-19  | CONDUIT | 73.63                 | 0 12:22                           | 8.80                      | 0.25              | 0.34               |
| RT-1E  | CONDUIT | 21.81                 | 0 13:41                           | 7.50                      | 0.17              | 0.28               |

|        |         |         |   |       |       |      |      |
|--------|---------|---------|---|-------|-------|------|------|
| RT-2   | CONDUIT | 149.76  | 0 | 12:39 | 4.77  | 0.00 | 0.08 |
| RT-20  | CONDUIT | 1838.99 | 0 | 13:43 | 11.63 | 0.02 | 0.14 |
| RT-21  | CONDUIT | 29.04   | 0 | 12:19 | 12.40 | 0.19 | 0.30 |
| RT-22  | CONDUIT | 18.79   | 0 | 13:51 | 13.54 | 0.20 | 0.31 |
| RT-2E  | CONDUIT | 83.38   | 0 | 12:28 | 11.16 | 0.63 | 0.58 |
| RT-3   | CONDUIT | 149.88  | 0 | 12:29 | 4.74  | 0.00 | 0.08 |
| RT-3E  | CONDUIT | 21.10   | 0 | 13:47 | 8.05  | 0.15 | 0.26 |
| RT-4   | CONDUIT | 283.34  | 0 | 12:34 | 5.28  | 0.00 | 0.10 |
| RT-4E  | CONDUIT | 152.15  | 0 | 12:42 | 13.20 | 1.08 | 0.94 |
| RT-5   | CONDUIT | 866.84  | 0 | 12:44 | 7.60  | 0.02 | 0.18 |
| RT-5E  | CONDUIT | 220.47  | 0 | 12:43 | 20.00 | 0.58 | 0.55 |
| RT-6   | CONDUIT | 228.99  | 0 | 12:32 | 5.64  | 0.00 | 0.09 |
| RT-6B  | CONDUIT | 367.10  | 0 | 12:45 | 5.49  | 0.00 | 0.12 |
| RT-6E  | CONDUIT | 4.91    | 0 | 13:39 | 5.25  | 0.03 | 0.13 |
| RT-7A  | CONDUIT | 26.58   | 0 | 12:21 | 13.50 | 0.10 | 0.21 |
| RT-7E  | CONDUIT | 229.28  | 0 | 12:45 | 13.80 | 0.62 | 0.57 |
| RT-8   | CONDUIT | 46.59   | 0 | 12:46 | 16.53 | 1.05 | 0.93 |
| RT-9A  | CONDUIT | 1412.57 | 0 | 12:48 | 7.12  | 0.03 | 0.19 |
| RT-9B  | CONDUIT | 1496.36 | 0 | 12:48 | 8.19  | 0.02 | 0.18 |
| RT-9C  | CONDUIT | 1523.58 | 0 | 12:51 | 7.62  | 0.03 | 0.19 |
| RT-9D  | CONDUIT | 1640.44 | 0 | 12:53 | 7.91  | 0.03 | 0.19 |
| RT-14  | CONDUIT | 1551.66 | 0 | 13:41 | 7.73  | 0.02 | 0.17 |
| 1      | DUMMY   | 151.94  | 0 | 12:20 |       |      |      |
| 2      | DUMMY   | 99.04   | 0 | 12:25 |       |      |      |
| 3      | DUMMY   | 75.41   | 0 | 12:25 |       |      |      |
| 4      | DUMMY   | 79.38   | 0 | 12:25 |       |      |      |
| 5      | DUMMY   | 219.17  | 0 | 12:20 |       |      |      |
| 6      | DUMMY   | 68.70   | 0 | 12:20 |       |      |      |
| 7      | DUMMY   | 86.36   | 0 | 12:30 |       |      |      |
| 8      | DUMMY   | 59.46   | 0 | 12:25 |       |      |      |
| 9      | DUMMY   | 58.52   | 0 | 12:25 |       |      |      |
| 10     | DUMMY   | 9.66    | 0 | 12:25 |       |      |      |
| 11     | DUMMY   | 12.95   | 0 | 12:20 |       |      |      |
| 12     | DUMMY   | 70.95   | 0 | 12:20 |       |      |      |
| 13     | DUMMY   | 55.73   | 0 | 12:15 |       |      |      |
| 14     | DUMMY   | 52.53   | 0 | 12:15 |       |      |      |
| 15     | DUMMY   | 30.90   | 0 | 12:15 |       |      |      |
| 16     | DUMMY   | 13.62   | 0 | 12:15 |       |      |      |
| 17     | DUMMY   | 45.22   | 0 | 12:15 |       |      |      |
| 18     | DUMMY   | 98.33   | 0 | 12:15 |       |      |      |
| 20     | DUMMY   | 57.99   | 0 | 12:15 |       |      |      |
| 22     | DUMMY   | 218.85  | 0 | 12:15 |       |      |      |
| 24     | DUMMY   | 417.25  | 0 | 12:15 |       |      |      |
| 25     | DUMMY   | 153.60  | 0 | 12:15 |       |      |      |
| 27     | DUMMY   | 101.34  | 0 | 12:15 |       |      |      |
| 28     | DUMMY   | 106.61  | 0 | 12:15 |       |      |      |
| 29     | DUMMY   | 265.69  | 0 | 12:15 |       |      |      |
| 30     | DUMMY   | 159.74  | 0 | 12:15 |       |      |      |
| 34     | DUMMY   | 64.05   | 0 | 12:15 |       |      |      |
| 36     | DUMMY   | 54.72   | 0 | 12:25 |       |      |      |
| 37     | DUMMY   | 18.71   | 0 | 12:30 |       |      |      |
| 38     | DUMMY   | 225.81  | 0 | 12:25 |       |      |      |
| RT-17A | CONDUIT | 172.21  | 0 | 12:32 | 6.76  | 0.00 | 0.11 |
| 39     | DUMMY   | 119.86  | 0 | 12:25 |       |      |      |
| 40     | DUMMY   | 24.00   | 0 | 12:15 |       |      |      |
| 42     | DUMMY   | 144.67  | 0 | 12:15 |       |      |      |
| 44     | DUMMY   | 10.51   | 0 | 12:15 |       |      |      |

|                         |         |         |   |       |       |      |      |
|-------------------------|---------|---------|---|-------|-------|------|------|
| 45                      | DUMMY   | 2.94    | 0 | 12:15 |       |      |      |
| 46                      | DUMMY   | 2.39    | 0 | 12:20 |       |      |      |
| 47                      | DUMMY   | 54.26   | 0 | 12:20 |       |      |      |
| 48                      | DUMMY   | 73.94   | 0 | 12:25 |       |      |      |
| 51                      | DUMMY   | 411.15  | 0 | 12:15 |       |      |      |
| 54                      | DUMMY   | 231.81  | 0 | 12:15 |       |      |      |
| 56                      | DUMMY   | 15.09   | 0 | 12:15 |       |      |      |
| 58                      | CONDUIT | 2095.47 | 0 | 13:16 | 14.88 | 0.01 | 0.13 |
| 63                      | DUMMY   | 150.82  | 0 | 12:15 |       |      |      |
| 65                      | DUMMY   | 77.21   | 0 | 12:15 |       |      |      |
| 67                      | DUMMY   | 1843.80 | 0 | 13:43 |       |      |      |
| RT-15A                  | CONDUIT | 165.30  | 0 | 12:16 | 20.37 | 0.70 | 0.62 |
| RT-15B                  | CONDUIT | 263.41  | 0 | 12:16 | 20.94 | 0.43 | 0.46 |
| 69                      | DUMMY   | 196.64  | 0 | 12:15 |       |      |      |
| 70                      | DUMMY   | 101.25  | 0 | 12:15 |       |      |      |
| RT-25                   | CONDUIT | 145.68  | 0 | 14:16 | 4.90  | 0.02 | 0.18 |
| 71                      | CONDUIT | 0.08    | 0 | 02:03 | 0.10  | 1.08 | 1.00 |
| 74                      | DUMMY   | 48.66   | 0 | 12:15 |       |      |      |
| 75                      | DUMMY   | 42.98   | 0 | 12:20 |       |      |      |
| 77                      | DUMMY   | 203.13  | 0 | 12:15 |       |      |      |
| 78                      | DUMMY   | 85.60   | 0 | 12:15 |       |      |      |
| 79                      | DUMMY   | 582.23  | 0 | 12:15 |       |      |      |
| 80                      | CONDUIT | 16.04   | 0 | 13:34 | 16.18 | 0.16 | 0.27 |
| 81                      | DUMMY   | 50.30   | 0 | 12:15 |       |      |      |
| 82                      | DUMMY   | 69.54   | 0 | 12:15 |       |      |      |
| 83                      | DUMMY   | 13.95   | 0 | 12:25 |       |      |      |
| 84                      | DUMMY   | 1665.91 | 0 | 12:53 |       |      |      |
| 85                      | DUMMY   | 12.51   | 0 | 12:20 |       |      |      |
| 86                      | DUMMY   | 23.70   | 0 | 12:20 |       |      |      |
| FSD01_Outlet            | DUMMY   | 25.50   | 0 | 12:27 |       |      |      |
| FSD05_Outlet            | DUMMY   | 3.70    | 0 | 12:06 |       |      |      |
| FSD06_Outlet            | DUMMY   | 139.30  | 0 | 12:17 |       |      |      |
| FSD11B_Outlet           | DUMMY   | 77.00   | 0 | 12:04 |       |      |      |
| FSD12_Outlet            | DUMMY   | 103.10  | 0 | 12:21 |       |      |      |
| FSD13_Outlet            | DUMMY   | 43.80   | 0 | 12:12 |       |      |      |
| FSD14A_Outlet           | DUMMY   | 176.20  | 0 | 12:25 |       |      |      |
| FSD14B_Outlet           | DUMMY   | 19.30   | 0 | 11:56 |       |      |      |
| FSD15B_Outlet           | DUMMY   | 68.04   | 0 | 13:07 |       |      |      |
| FSD16A_Outlet           | DUMMY   | 128.30  | 0 | 12:11 |       |      |      |
| FSD16B_Outlet           | DUMMY   | 28.20   | 0 | 12:15 |       |      |      |
| FSD17B_Outlet           | DUMMY   | 58.89   | 0 | 12:27 |       |      |      |
| FSD18_Outlet            | DUMMY   | 29.78   | 0 | 12:38 |       |      |      |
| FSD21_Outlet            | DUMMY   | 16.00   | 0 | 12:18 |       |      |      |
| FSD22_Outlet            | DUMMY   | 23.12   | 0 | 12:47 |       |      |      |
| FSD72_Outlet            | DUMMY   | 62.10   | 0 | 12:30 |       |      |      |
| FSD9_Outlet             | DUMMY   | 264.75  | 0 | 12:52 |       |      |      |
| FSDE2_Outlet            | DUMMY   | 21.11   | 0 | 13:47 |       |      |      |
| FSDE3_Outlet            | DUMMY   | 67.91   | 0 | 12:52 |       |      |      |
| FSDE4_Outlet            | DUMMY   | 4.91    | 0 | 13:35 |       |      |      |
| FSDE5_Outlet            | DUMMY   | 3.80    | 0 | 12:23 |       |      |      |
| FSDE6_Outlet            | DUMMY   | 46.78   | 0 | 13:06 |       |      |      |
| FSDE1_Outlet            | DUMMY   | 21.81   | 0 | 13:41 |       |      |      |
| PNDE7_Outlet            | DUMMY   | 145.69  | 0 | 14:13 |       |      |      |
| FSD17A_Outlet           | DUMMY   | 30.30   | 0 | 12:38 |       |      |      |
| PNDW3_Outlet            | DUMMY   | 1486.64 | 0 | 13:45 |       |      |      |
| FSD27_Outlet            | DUMMY   | 78.35   | 0 | 12:51 |       |      |      |
| EX_STOCK_POND_1_OUTFALL | DUMMY   | 1786.01 | 0 | 13:16 |       |      |      |



FSD23\_Outlet DUMMY 18.60 0 12:14  
 FSD12A\_Outlet DUMMY 23.40 0 12:25  
 EX\_STOCK\_POND\_2\_OUTLET DUMMY 1662.14 0 12:55

\*\*\*\*\*

Conduit Surcharge Summary

\*\*\*\*\*

| Conduit | Hours                  |          | Hours      |          | Capacity    |
|---------|------------------------|----------|------------|----------|-------------|
|         | ----- Hours Full ----- | -----    | Above Full | Dnstream |             |
|         | Both Ends              | Upstream |            |          | Normal Flow |
|         |                        |          |            |          | Limited     |
| RT-10A  | 0.97                   | 0.97     | 0.97       | 1.02     | 0.97        |
| RT-16   | 0.13                   | 0.13     | 0.13       | 0.13     | 0.13        |
| RT-17B  | 0.69                   | 0.69     | 0.69       | 0.71     | 0.69        |
| RT-4E   | 0.38                   | 0.38     | 0.38       | 0.38     | 0.38        |
| RT-8    | 0.48                   | 0.48     | 0.48       | 0.19     | 0.48        |
| 71      | 76.45                  | 76.45    | 76.45      | 0.03     | 76.45       |

Analysis begun on: Thu Mar 24 10:14:09 2022  
 Analysis ended on: Thu Mar 24 10:14:10 2022  
 Total elapsed time: 00:00:01

**APPENDIX D**

**REFERENCE MATERIAL**

# TECHNICAL MEMORANDUM



---

**To:** Jeff Rice, PE, El Paso County  
**From:** Mike Bramlett, PE, JR Engineering  
**Date:** April 13, 2021  
**Subject:** Sterling Ranch MDDP – Hydrology Alternatives

---

Mr. Rice,

JR Engineering is preparing an updated MDDP for the Sterling Ranch Development, revising the approved *Master Development Drainage Plan for Sterling Ranch* prepared by M&S Civil Consultants, dated October 2018. JR is presenting two alternatives for how the hydrology for the MDDP along Sand Creek could be analyzed. Initially, JR was provided with a HEC-HMS model previously done by M&S for the current MDDP. Due in part to skepticism over the validity of the model, as well as the desire to incorporate all the proposed offline storage into the model, it was decided that rather than revising the existing model in HEC-HMS, it would be preferable to use EPA SWMM for the hydrologic modeling. Unfortunately, there is no clean, easy way to directly convert a HEC-HMS model to SWMM. The HEC-HMS model uses SCS Curve Number for its infiltration calculations. Colorado Springs criteria explicitly states that Curve Number cannot be used in SWMM because it doesn't accurately model infiltration with Curve Number. Unable to directly use Curve Number, it is proposed instead to use Horton's Equation for infiltration.

The two modeling methods presented both use SWMM. One model uses CUHP to generate sub-basin hydrology, while the other uses the internal hydrologic parameters in SWMM. Rather than modeling all the design storms at this time, we decided to use just the Existing Conditions 100-year storm for this comparison, since the model is simpler and where the differences between models would be at their most extreme. Both models use the 24-hour Type II Storm, simulating a frontal storm typically seen along the Front Range.

**Alternative 1:** This evaluation uses the Colorado Urban Hydrograph Procedure (CUHP) to develop sub-basin hydrographs for use in SWMM. To get as close of a comparison as possible, we tried to use as much original sub-basin information as possible from the 2018 MDDP. From the MDDP Appendices we were able to determine basin area and imperviousness. Basin length and distance to centroid were determined by re-creating the Existing Conditions Map. Basin slope was determined based on the Lag Time tables in the appendices and then adjusted based Colorado Springs criteria for slopes in SWMM models. Horton parameters were determined based on the soil group composition of each basin. The rain gauge for the 24-hr storm was made by converting the cumulative hydrograph into an incremental one, so as to better model the peaks.

All basins were defined as junction nodes. Any nodes that had a defined channel connecting them were used based on parameters taken from the HEC-HMS model. When a channel wasn't defined in the HEC-HMS model, it was assumed that one wasn't present and a dummy conduit of minimal length was used to connect the node to its nearest downstream junction. Results from both alternatives can be seen in the table below.



**Alternative 2:** This alternative calculates the sub-basin hydrology based on the internal hydrology parameters within SWMM. Basin area, imperviousness, and slope were all the same as those used in alternative 1. Horton parameters were also taken directly from alternative 1. All defined channels were also taken directly from alternative 1. One of the biggest differences between the two is how it calculates basin width. Colorado Springs provides an excel spreadsheet to convert an irregular shaped basin into a uniform width rectangle. The other big difference between the two models is how routing is done. To simulate runoff from single family houses and local roads in the mostly large, undeveloped basins, pervious routing was used. Depression storage depths were the same assumptions used in alternative 1, and it was assumed that zero percent of all the basins had no depression storage available. The rain gauge was identical to the cumulative hydrograph in the HEC-HMS model.

The basins were laid out in a similar fashion as the HEC-HMS model. If a basin doesn't drain directly to a defined channel, then the basin drains to a dummy node at the top of the channel, which then conveys it downstream to the next node. Channel parameters were taken directly from the HEC-HMS model. Results from both alternatives can be seen in the table below.

| Basin Summary |                                |                 |                    |                               |                    |
|---------------|--------------------------------|-----------------|--------------------|-------------------------------|--------------------|
| Basin         | MDDP (HEC-HMS)                 | CUHP            |                    | SWMM                          |                    |
|               | 24-hr Type II Storm Q100 (cfs) | CUHP Q100 (cfs) | Percent Difference | Internal Hydrology Q100 (cfs) | Percent Difference |
| EX-0          | 32.2                           | 31.5            | 2%                 | 67.7                          | 210%               |
| EX-1          | 30.9                           | 27.9            | 10%                | 73.3                          | 237%               |
| EX-2          | 7.1                            | 4.5             | 36%                | 58.9                          | 830%               |
| EX-3          | 143.1                          | 149.6           | 5%                 | 640.5                         | 448%               |
| EX-3A         | 192.6                          | 223.4           | 16%                | 556.7                         | 289%               |
| EX-4          | 197.3                          | 221.2           | 12%                | 542.5                         | 275%               |
| EX-4A         | 160.1                          | 104.8           | 35%                | 378.6                         | 236%               |
| EX-5          | 158.2                          | 150.4           | 5%                 | 786.7                         | 497%               |
| EX-6          | 100.5                          | 95.3            | 5%                 | 387.6                         | 386%               |
| EX-7          | 107.4                          | 147.0           | 37%                | 484.5                         | 451%               |
| EX-8          | 20.5                           | 50.9            | 248%               | 151.4                         | 738%               |
| EX-9          | 125.2                          | 106.6           | 15%                | 222.9                         | 178%               |
| EX-10         | 236.1                          | 247.9           | 5%                 | 786.5                         | 333%               |
| EX-10A        | 43.1                           | 121.6           | 282%               | 338.2                         | 785%               |
| EX-11         | 126.1                          | 213.9           | 170%               | 365.1                         | 290%               |
| EX-12         | 33.3                           | 63.4            | 90%                | 98.8                          | 297%               |
| EX-13         | 78.4                           | 70.5            | 10%                | 327.7                         | 418%               |
| EX-20         | 166.2                          | 215.0           | 29%                | 453.7                         | 273%               |
| EX-20A        | 194.6                          | 171.9           | 12%                | 235.3                         | 121%               |
| EX-21         | 49                             | 41.9            | 14%                | 259.6                         | 530%               |
| EX-24         | 73                             | 60.4            | 17%                | 148.0                         | 203%               |
| EX-25         | 25.1                           | 38.2            | 52%                | 72.2                          | 287%               |
| EX-73         | 102                            | 102.0           | 0%                 | 262.2                         | 257%               |
| EX-74         | 140.7                          | 197.9           | 41%                | 349.0                         | 248%               |
| EX-75         | 82.8                           | 85.8            | 4%                 | 330.7                         | 399%               |
| EX-76         | 89.6                           | 86.2            | 4%                 | 330.5                         | 369%               |
| EX-77         | 227.7                          | 190.5           | 16%                | 704.5                         | 309%               |
| EX-78         | 174.5                          | 245.4           | 41%                | 318.9                         | 183%               |
| EX-79         | 220.1                          | 299.7           | 36%                | 348.6                         | 158%               |
| EX-80         | 171.4                          | 181.7           | 6%                 | 373.6                         | 218%               |
| EX-81         | 275.7                          | 267.2           | 3%                 | 349.1                         | 127%               |
| EX-82         | 132.3                          | 186.8           | 41%                | 243.3                         | 184%               |
| EX-88         | 144.4                          | 156.6           | 8%                 | 410.1                         | 284%               |



**Results:** As seen in the above table, almost across the board, the CUHP model was closer to MDDP results than the SWMM Internal Geometry. There are basins where the CUHP is within a few percent of the MDDP, while the Internal Hydrology is several times higher. A few basins are over double compared to the MDDP in both models, but for the most part the Internal Hydrology model is substantially higher. The discrepancy appears to be mainly in the hydrology itself. The values at the design points of the model are overall closer to the MDDP values. Peak values at design points for the CUHP model are within 40% with one exception, while there are 8 nodes in the Internal Hydrology model that are at least double that of the MDDP. Curiously, volumes across the board show a lower percent difference than peak flows. The CUHP volumes all stay below 50% of the MDDP model, while the highest difference in the Internal Hydrology model is 76%.

**Conclusions:** As expected, converting a HEC-HMS model to a SWMM model creates differences in results, regardless of how you choose to model it. Due to SWMM's inability to properly model SCS Curve Number, neither of these models is a perfect comparison to the 2018 MDDP's HEC-HMS models. Using as many parameters provided from the MDDP model as possible, we were able to create two functioning SWMM models. Using CUHP to calculate basin hydrology proved to be across the board more similar to the MDDP results than by calculating basin hydrology with SWMM's internal parameters.

It is our recommendation that CUHP and SWMM be used for all further hydrologic modeling involved with this MDDP revision.

**FINAL DRAINAGE REPORT FOR  
HOMESTEAD AT STERLING RANCH  
FILING NO. 1**

**EL PASO COUNTY, COLORADO**

July 2018

Prepared for:

**SR Land, LLC  
20 Boulder Crescent, Suite 210  
Colorado Springs, CO 80903**

Prepared by:



**20 Boulder Crescent, Suite 110  
Colorado Springs, CO 80903  
(719) 955-5485**

Project #09-005  
DSD Project # SF-17-025

**DP5, (Aka DP5\*)** 0.80 acres, consists of 0.61 acres proposed backyards of residential lots (Basin G) that have assigned runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year, as well 0.19 acres of Dines Boulevard (Basin H) with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year as well as flow by from DP4. Developed runoff of 4.2 and 19.7 cfs has been calculated to reach DP5 in the two events respectively. An existing 15' CDOT type R at-grade inlet at DP5 will intercept flows of  $Q_5=4.2$  cfs and  $Q_{100}=14.7$  cfs. These flows are equivalent to the flows documented in the MDDPSR report ( $Q_5=4.2$  cfs and  $Q_{100}=19.7$  cfs). An existing 36" RCP will carry the collected runoff under existing Dines Boulevard towards DP6, while flow-by from DP5 will continue south within Dines Boulevard.

**DP6, (Aka DP5\*)** 4.68 acres, consists backyards of residential lots of 0.43 and 0.61 acres in size (Basins OS3 and OS4) that have been assigned runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year events and 2.1 acre portion of Wheatland Drive and 1.54 acre portion of Dines Boulevard, both with assigned runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year events. Developed runoff of  $Q_5=14.1$  cfs and  $Q_{100}=26.7$  cfs has been calculated to reach DP6. An existing 15' CDOT type R at-grade inlet. These flows are equivalent to the flows documented in the MDDPSR report ( $Q_5=14.1$  cfs and  $Q_{100}=26.7$  cfs). Flow-by from DP6 will continue south within Dines Boulevard.

**DP7, (Aka DP9\*)** 9.73 acres, consists of proposed residential lots of the planned development located east of the subject site (Basin OS-6) that have been assigned runoff coefficients of 0.38 for the 5-year and 0.55 for the 100-year events. Developed runoff of  $Q_5=12.6$  cfs and  $Q_{100}=30.5$  cfs has been calculated to reach DP7. An existing 30" RCP will convey runoff to existing FSD Pond 4. The flows in PR7 are approximately equivalent to the flows documented in the MDDPSR report of  $Q_5=12.5$  cfs and  $Q_{100}=30.4$  cfs.

**DP8,(Aka DP10\*)** 1.97 acres, consists of Basin S (Existing FSD Pond 4) with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year and runoff from PR4, PR6 and PR7. Based upon this drainage analysis the total combined developed runoff to reach DP10 at the existing pond will be  $Q_5=49.2$  cfs and  $Q_{100}=105.39$  cfs for the 5 and 100 year events respectively, which varies just slightly from the MDDPSR flows of  $Q_5=50.0$  cfs and  $Q_{100}=102.9$  cfs that the facility was designed for.

The existing privately maintained facility, as constructed, continues to provide full spectrum detention and water quality for the calculated runoff as planned. The pond will continue to treat approx 27.63 acres, and provide 0.46 ac-ft of water quality storage and 2.915 ac-ft of 100-year storage (refer to UD-Detention worksheet in appendix of this report). According to the updated UD detention worksheet, the slight inflow increase in results in only an increase in the ponding elevation of 0.03' and an increase of 0.6 cfs being released from the pond when compared to the initial design worksheets. Despite the minor increase the pond continues to meet the required drain times and pre-developed flow release rates as necessary with no negative impacts to downstream facilities.

In the event of clogging or total inlet failure, flows at DP8 will over top the existing emergency spillway and outfall into Sand Creek. The existing detention pond will be private and shall be maintained by the Sterling Ranch Metropolitan District (SRMD). Access has been granted to the SRMD and El Paso County for access and maintenance of the private detention pond.

**DP9,(Aka DP10\*)** 3.01 acres, consists of 2.71 acres of existing low density residential (Basin OS1A) that have assigned runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year and 0.31 acres of existing

bottom of the rundown provides to dissipate energy and prevent local scour. Runoff is conveyed southerly in an existing earthen swale that leads to existing Detention Pond W-9.

**DP14 (Aka DP61\*)**, 4.03 acres, consists 1.15 acres of rear residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year and 1.60 acres of landscape area and an existing FSD pond (Basin M2) that has been assigned runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year and 2.04 acres of the eastern half of existing Vollmer Road and adjacent landscaped areas, which have been assigned runoff coefficients of 0.63 and 0.76 for the 5 and 100 year events respectively as well as flows from DP13. Runoff reaching the existing pond at DP 14 is calculated to be  $Q_5=8.9$  cfs and  $Q_{100}=21.2$  cfs, which matches the MDDPSR flows of  $Q_5=8.9$  cfs and  $Q_{100}=21.2$  cfs that the facility was designed for.

The existing facility functions to provide full spectrum detention and water quality for runoff calculated to reach DP14. The existing pond will treat approx 5.87 acres, and provide 0.092 ac-ft of water quality storage and 0.638 ac-ft of 100-year storage. As described within the MDDPSR the detention facility is private and shall be maintained by the Sterling Ranch Metropolitan District. Access shall be granted to the owner and El Paso County for access and maintenance of the private detention pond. In the event of clogging or total inlet failure, flows at DP14 will over top the emergency spillway and outfall into a proposed swale which will route flows to an existing Vollmer Road side swale. The peak release rates from Pond W-9 ( $PR_{13}$ ,  $Q_5=0.6$  cfs and  $Q_{100}=8.7$  cfs) are conveyed within an existing 18" RCP to and existing 30" RCP ( $PR_{14}$ ) ( $Q_5=7.6$  cfs and  $Q_{100}=47.2$  cfs). These flows will be combine with flows from  $PR_{12}$  and be routed east, within the Homestead Sterling Ranch Filing No. 1 subdivision, via a 54" RCP,  $PR_{15}$  ( $Q_5=23.8$  cfs and  $Q_{100}=164.1$  cfs). These flows will combine with flows from  $PR_{16}$  ( $Q_5=2.8$  cfs and  $Q_{100}=36.8$  cfs, release rate Pond 4) and be routed south via a 60" RCP,  $PR_{12}$  ( $Q_5=26.6$  cfs and  $Q_{100}=200.9$  cfs). These flows are nearly equivalent to the SRMDDP runoff rates of ( $Q_5=26.5$  cfs and  $Q_{100}=200.3$  cfs) which the pipe was designed. The collected runoff will outfall into an existing low tailwater irap basin at Sand Creek.

**Basin N** 2.08 acres, consists of proposed residential backyard lots and part of Tract L located along the south boundary of Homestead at Sterling Ranch Filing No. 1 with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year. Developed runoff of  $Q_5=1.6$  cfs and  $Q_{100}=5.7$  cfs have been calculated for the basin. Runoff from the proposed residential backyard lots will flow to an existing swale that falls along the east boundary of the Barbarick Subdivision. Basin N was part of a larger Basin YY\* that was as discussed in the MDDPSR. The limited developed flows from Basin N that are discharged to the south are considerably less than the historic flows previously directed toward the Barbarick subdivision as can be seen by noting Basin EX-3A in the Sterling Ranch MDDP Existing Conditions Map. As the backyards are typically permeable, and roof drainage from the back of the house shall be directed to the front of the lot water quality treatment will be addressed in the paragraph below.

The flows generated by Basin N and Tract L will be routed south via overlot grading and swales to a temporary sediment basin (future Pond W-5), at the south end of the Sterling Ranch Development. Upon development of the Sterling Ranch Filing No. 2 infrastructure Pond W-5 will be constructed and flows from Basin N and Tract L will be treated as WQCV and Full Spectrum Detention. As such the proposed develop shall not adversely affect the downstream infrastructure.



**Basin O** 0.57 acres, consists of planned residential backyard lots located along the south boundary of Homestead at Sterling Ranch Filing No. 1 that have been assigned runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year storm events. Developed runoff of, Q5=0.5 cfs and Q100=1.8 cfs is anticipated to be produced by the basin. Runoff from the proposed residential backyard lots will sheet flows towards the planned Branding Iron at Sterling Ranch Filing No. 1 as discussed in the MDDPSR. Basin O was part of a larger Basin GG\* in the MDDPSR. Runoff from basin O and the flow-by from DP1, 2, 5 and 6 will be collected within existing system within existing Dines Boulevard and detained and released at pre-developed flow rates from FSD Pond 4. Refer to Branding Iron at Sterling Ranch filing No.1 FDR for additional information.

## **DETENTION PONDS**

### **Water Quality/Full Spectrum Detention Facilities**

As discussed in the detained drainage summary, developed runoff from Homestead at Sterling Ranch Filing No. 1 is conveyed to existing Full Spectrum Detention Ponds No 4, 8 and W-9 in accordance with the Sterling Ranch Filing Nos. 1&2 MDDP. Based upon the provided analysis the ponds are adequate to serve their intended purpose and require no modification. This is because this final drainage report and the SR Filing 1 and 2 MDDP were nearly concurrent. Thus the larger scale concept planning was very finite and thus allowed for the developed flow rates to align between the two documents and thereby not requiring modifications to facility which is often common between conceptual and final design. The information provided in this report regarding Ponds 8 and W-9 shall supersede the information presented in the MDDP and should be re-referenced with future design.

The flows generated by Basin N and Tract L will be routed south via overlot grading and vegetated swales to a temporary sediment basin (future Pond W-5), at the south end of the Sterling Ranch Development. Upon development of the Sterling Ranch Filing No. 2 infrastructure Pond W-5 will be constructed and flows from Basin N and Tract L will be treated as WQCV (see WQCV deviation request) and Full Spectrum Detention. As such the proposed develop shall not adversely affect the downstream infrastructure.

## **EROSION CONTROL**

It is the policy of the El Paso County that a grading and erosion control plan be submitted with the drainage report. EPC approved “Early Grading Plan for Sterling Ranch Phase I Onsite Grading & Erosion Control”, November 18, 2015. And “Early Grading Plan for Sterling Ranch Phase I Offsite Grading & Erosion Control”, December 3, 2015. Grading and Erosion control operations are currently underway (August 2016). Grading and Erosion Control will cease with the final development of the site in the next 12-36 months.

## **CONSTRUCTION COST OPINION – HOMESTEAD AT STERLING RANCH FILING NO. 1**


### **Drainage Facilities:**

Minor improvements with the development of Homestead at Sterling Ranch Filing No. 1 are listed below. The majority of the infrastructure construction costs have been accounted for in the “Master Development



## Detention Basin Outlet Structure Design

Project: **STERLING RANCH FILING NO. 1**  
 Basin ID: **POND 4**



|                   | Stage (ft) | Zone Volume (ac-ft) | Outlet Type          |
|-------------------|------------|---------------------|----------------------|
| Zone 1 (WQCV)     | 3.32       | 0.494               | Orifice Plate        |
| Zone 2 (EURV)     | 5.38       | 1.079               | Orifice Plate        |
| Zone 3 (100-year) | 6.69       | 1.209               | Weir&Pipe (Restrict) |
| <b>Total</b>      |            | <b>2.781</b>        |                      |

**User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)**

|                                   |     |  |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter =     | N/A | inches   |

**Calculated Parameters for Underdrain**

|                               |     |                 |
|-------------------------------|-----|-----------------|
| Underdrain Orifice Area =     | N/A | ft <sup>2</sup> |
| Underdrain Orifice Centroid = | N/A | feet            |

**User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)**

|  |       |   |
|--|-------|---|
| Invert of Lowest Orifice =                 | 0.00  | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 5.37  | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing =  | 19.40 | inches  |
| Orifice Plate: Orifice Area per Row =      | N/A   | inches  |

**Calculated Parameters for Plate**

|                            |     |                 |
|----------------------------|-----|-----------------|
| WQ Orifice Area per Row =  | N/A | ft <sup>2</sup> |
| Elliptical Half-Width =    | N/A | feet            |
| Elliptical Slot Centroid = | N/A | feet            |
| Elliptical Slot Area =     | N/A | ft <sup>2</sup> |

**User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)**

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.79             | 3.58             |                  |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 2.33             | 2.33             | 2.60             |                  |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

**User Input: Vertical Orifice (Circular or Rectangular)**

|   | Not Selected | Not Selected |   |
|---|--------------|--------------|---|
| Invert of Vertical Orifice =                  | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | N/A          | N/A          | inches  |

**Calculated Parameters for Vertical Orifice**

|                             | Not Selected | Not Selected |                 |
|-----------------------------|--------------|--------------|-----------------|
| Vertical Orifice Area =     | N/A          | N/A          | ft <sup>2</sup> |
| Vertical Orifice Centroid = | N/A          | N/A          | feet            |

**User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)**

|                                       | Zone 3 Weir | Not Selected |   |
|---------------------------------------|-------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 5.37        | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 9.00        | N/A          | feet  |
| Overflow Weir Slope =                 | 4.00        | N/A          | H:V (enter zero for flat grate)               |
| Horiz. Length of Weir Sides =         | 2.91        | N/A          | feet  |
| Overflow Grate Open Area % =          | 70%         | N/A          | % grate open area/total area                  |
| Debris Clogging % =                   | 50%         | N/A          | %   |

**Calculated Parameters for Overflow Weir**

|  | Zone 3 Weir | Not Selected |                 |
|--|-------------|--------------|-----------------|
| Height of Grate Upper Edge, H <sub>1</sub> = | 6.10        | N/A          | feet            |
| Over Flow Weir Slope Length =                | 3.00        | N/A          | feet            |
| Grate Open Area / 100-yr Orifice Area =      | 4.06        | N/A          | should be ≥ 4   |
| Overflow Grate Open Area w/o Debris =        | 18.90       | N/A          | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | 9.45        | N/A          | ft <sup>2</sup> |

**User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)**

|   | Zone 3 Restrictor | Not Selected |  |
|---|-------------------|--------------|--|
| Depth to Invert of Outlet Pipe =            | 0.00              | N/A          | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 30.00             | N/A          | inches   |
| Restrictor Plate Height Above Pipe Invert = | 27.00             |              | inches   |

**Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate**

|  | Zone 3 Restrictor | Not Selected |                 |
|--|-------------------|--------------|-----------------|
| Outlet Orifice Area =                            | 4.65              | N/A          | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | 1.19              | N/A          | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | 2.50              | N/A          | radians         |

**User Input: Emergency Spillway (Rectangular or Trapezoidal)**

|                                     |       |   |
|-------------------------------------|-------|---|
| Spillway Invert Stage =             | 7.33  | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length =             | 34.00 | feet  |
| Spillway End Slopes =               | 4.00  | H:V   |
| Freeboard above Max Water Surface = | 1.00  | feet  |




**Calculated Parameters for Spillway**

|                                  |      |       |
|----------------------------------|------|-------|
| Spillway Design Flow Depth =     | 0.94 | feet  |
| Stage at Top of Freeboard =      | 9.27 | feet  |
| Basin Area at Top of Freeboard = | 1.31 | acres |

**Routed Hydrograph Results**

|   | WQCV  | EURV  | 2 Year | 5 Year           | 10 Year          | 25 Year          | 50 Year          | 100 Year         | 500 Year |
|---|-------|-------|--------|------------------|------------------|------------------|------------------|------------------|----------|
| Design Storm Return Period =                  |       |       |        |                  |                  |                  |                  |                  |          |
| One-Hour Rainfall Depth (in) =                | 0.53  | 1.07  | 1.19   | 1.50             | 1.75             | 2.00             | 2.25             | 2.52             | 6.53     |
| Calculated Runoff Volume (acre-ft) =          | 0.494 | 1.573 | 1.312  | 1.982            | 2.542            | 3.324            | 3.977            | 4.720            | 13.003   |
| OPTIONAL Override Runoff Volume (acre-ft) =   |       |       |        |                  |                  |                  |                  |                  |          |
| Inflow Hydrograph Volume (acre-ft) =          | 0.494 | 1.573 | 1.312  | 1.982            | 2.543            | 3.326            | 3.980            | 4.723            | 13.012   |
| Predevelopment Unit Peak Flow, q (cfs/acre) = | 0.00  | 0.00  | 0.01   | 0.20             | 0.40             | 0.90             | 1.16             | 1.48             | 2.09     |
| Predevelopment Peak Q (cfs) =                 | 0.0   | 0.0   | 0.4    | 5.5              | 11.0             | 24.8             | 32.1             | 40.9             | 57.7     |
| Peak Inflow Q (cfs) =                         | 11.0  | 34.8  | 79.1   | 43.8             | 56.3             | 73.9             | 88.6             | 105.3            | 289.7    |
| Peak Outflow Q (cfs) =                        | 0.2   | 0.4   | 0.4    | 2.8              | 9.0              | 18.6             | 27.1             | 36.8             | 195.3    |
| Ratio Peak Outflow to Predevelopment Q =      | N/A   | N/A   | N/A    | 0.5              | 0.8              | 0.7              | 0.8              | 0.9              | 3.4      |
| Structure Controlling Flow Plate =            | Plate | Plate | Plate  | Overflow Grate 1 | Overflow Grate 1 | Overflow Grate 1 | Overflow Grate 1 | Overflow Grate 1 | Spillway |
| Max Velocity through Grate 1 (fps) =          | N/A   | N/A   | N/A    | 0.1              | 0.4              | 1.0              | 1.4              | 1.9              | 3.2      |
| Max Velocity through Grate 2 (fps) =          | N/A   | N/A   | N/A    | N/A              | N/A              | N/A              | N/A              | N/A              | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =  | 38    | 70    | 64     | 72               | 70               | 68               | 66               | 64               | 48       |
| Time to Drain 99% of Inflow Volume (hours) =  | 40    | 75    | 68     | 78               | 77               | 76               | 76               | 75               | 65       |
| Maximum Ponding Depth (ft) =                  | 3.22  | 5.29  | 4.90   | 5.64             | 5.97             | 6.32             | 6.56             | 6.81             | 8.46     |
| Area at Maximum Ponding Depth (acres) =       | 0.33  | 0.71  | 0.61   | 0.81             | 0.91             | 1.01             | 1.08             | 1.15             | 1.28     |
| Maximum Volume Stored (acre-ft) =             | 0.460 | 1.510 | 1.253  | 1.776            | 2.060            | 2.386            | 2.647            | 2.915            | 4.956    |

## Detention Basin Outlet Structure Design

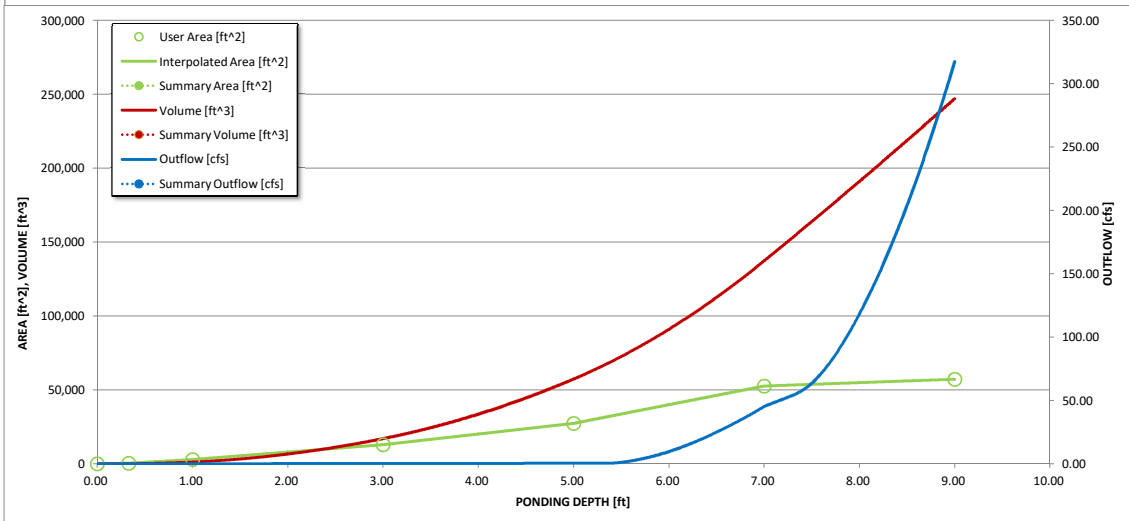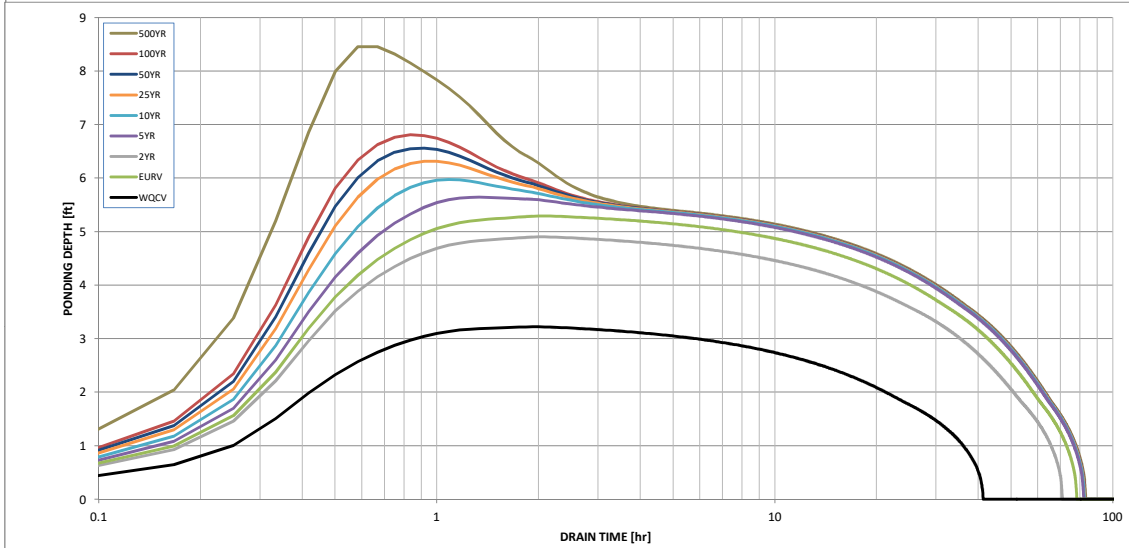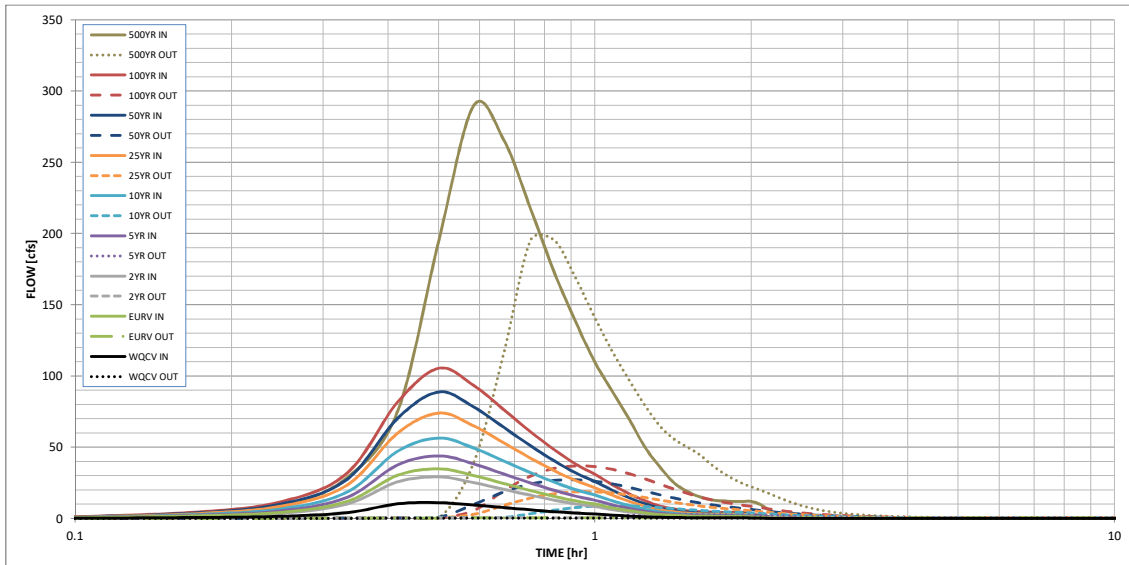

**S-A-V-D Chart Axis Override**

|               | X-axis | Left Y-Axis | Right Y-Axis |
|---------------|--------|-------------|--------------|
| minimum bound |        |             |              |
| maximum bound |        |             |              |



# HOMESTEAD AT STERLING RANCH FILING NO. 1

COUNTY OF EL PASO, STATE OF COLORADO


## FINAL DRAINAGE MAP

APRIL 2018

| BASIN SUMMARY  |              |                |                  |
|----------------|--------------|----------------|------------------|
| BASIN          | AREA (ACRES) | Q <sub>5</sub> | Q <sub>100</sub> |
| OS2            | 2.10         | 8.9            | 15.9             |
| OS3            | 0.43         | 0.4            | 1.3              |
| OS4            | 0.61         | 0.5            | 1.9              |
| OS5            | 1.54         | 5.6            | 10.0             |
| OS6            | 9.73         | 12.5           | 30.4             |
| OS7            | 1.97         | 0.7            | 5.3              |
| A              | 2.79         | 3.6            | 8.7              |
| B              | 2.70         | 3.6            | 8.6              |
| C              | 2.92         | 4.2            | 10.1             |
| D              | 2.90         | 4.3            | 10.4             |
| E              | 5.34         | 8.2            | 19.9             |
| F              | 1.12         | 4.3            | 7.7              |
| G              | 0.61         | 0.5            | 1.9              |
| EX-H           | 0.19         | 0.9            | 1.6              |
| M              | 1.15         | 1.0            | 3.6              |
| M2             | 1.60         | 0.4            | 3.2              |
| N              | 2.08         | 1.6            | 5.7              |
| O              | 0.57         | 0.5            | 1.8              |
| W-2            | 10.00        | 2.7            | 19.7             |
| OS1 HISTORIC   | 111.70       | 18.9           | 136.8            |
| SUB-BASIN OS1A | 2.70         | 0.7            | 5.3              |
| SUB-BASIN OS1B | 9.09         | 2.4            | 17.8             |
| SUB-BASIN OS1C | 5.64         | 1.5            | 11.1             |
| SUB-BASIN OS1D | 94.3         | 16.3           | 119.5            |
| V1A            | 0.31         | 1.4            | 2.6              |
| V1B            | 0.26         | 1.2            | 2.2              |
| V1C            | 0.21         | 1.0            | 1.7              |
| V1D            | 0.13         | 0.6            | 1.1              |
| V2             | 0.32         | 1.5            | 2.7              |
| RP-2B          | 2.04         | 4.9            | 9.9              |
| RP-2C          | 1.28         | 4.3            | 8.2              |

**LEGEND**



- BASIN DESIGNATION: Z, C5, C100
- ACRES: 25, .25, .35
- PIPE RUN REFERENCE LABEL: 4
- SURFACE DESIGN POINT: 6
- BASIN BOUNDARY: Dashed green line
- EXISTING CONTOUR: Dashed black line (6920)
- PROP CONTOUR: Solid black line (6920)
- FILING NO. 4 BOUNDARY: Solid black line
- EXISTING STORM SEWER PIPE: Dashed black line
- EXISTING STORM SEWER PIPE: Solid black line
- CROSSSPAN: Symbol
- INLET: Symbol
- EXISTING FLOW DIRECTION ARROW: Arrow
- FLOW DIRECTION: Arrow
- FLARED END SECTION: Symbol
- HIGH POINT: H.P. X
- LOW POINT: L.P. X

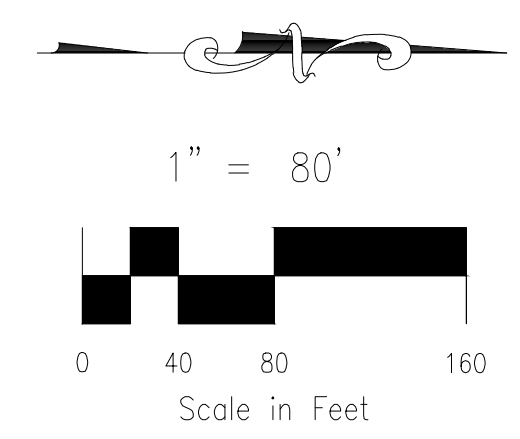

| DESIGN POINT SUMMARY |                |                  |                     |
|----------------------|----------------|------------------|---------------------|
| DESIGN POINT         | Q <sub>5</sub> | Q <sub>100</sub> | STRUCTURE           |
| 1                    | 3.6            | 8.7              | 15' AT-GRADE INLET  |
| 2                    | 3.6            | 8.6              | B                   |
| 3                    | 4.2            | 10.1             | C                   |
| 4                    | 16.1           | 36.7             | D, E, F             |
| 5                    | 4.2            | 19.7             | G, EX-H, FLOWBY DP4 |
| 6                    | 14.1           | 28.7             | OS2, OS3, OS4, OS5  |
| 7                    | 12.6           | 30.5             | OS6                 |
| 8                    | 49.2           | 105.3            | OS7, PR4, PR6, PR7  |
| 9                    | 1.6            | 7.0              | OS1A, V1A           |
| 10                   | 4.8            | 26.3             | OS1B, V1B, DP6      |
| 11                   | 2.2            | 12.3             | OS1C, V1C           |
| 12                   | 18.9           | 133.7            | OS1D, V1D, W-2, V2  |
| 13                   | 2.8            | 5.6              | RP-2B               |
| 14                   | 8.9            | 21.2             | M, M2, RP2C, DP13   |

| STORM SEWER SUMMARY |                |                  |                         |
|---------------------|----------------|------------------|-------------------------|
| PIPE RUN            | Q <sub>5</sub> | Q <sub>100</sub> | CONTRIBUTING PIPES/DP'S |
| 1                   | 3.6            | 8.7              | 30" RCP DP1             |
| 2                   | 7.1            | 17.2             | 36" RCP DP2, PR1        |
| 3                   | 4.2            | 10.1             | 18" RCP DP3             |
| 4                   | 16.8           | 29.4             | 30" RCP DP4, PR3        |
| 5                   | 10.8           | 30.0             | 36" RCP DPS, PR2        |
| 6                   | 21.0           | 44.6             | 36" RCP DP6, PR5        |
| 7                   | 12.6           | 30.5             | 24" RCP DP7             |
| 8                   | 1.6            | 7.0              | 12" CMP DP9             |
| 9                   | 4.8            | 26.3             | 24" RCP DP10            |
| 10                  | 2.2            | 12.3             | 18" RCP DP11            |
| 11                  | 7.0            | 38.6             | 30" RCP PR5, PR6        |
| 12                  | 18.9           | 133.7            | 54" RCP DP12            |
| 13                  | 0.6            | 8.7              | 18" RCP                 |
| 14                  | 7.6            | 47.2             | 30" RCP                 |
| 15                  | 23.8           | 164.1            | 54" RCP PR7, PR9        |
| 16                  | 2.7            | 36.2             | 30" RCP                 |
| 17                  | 26.5           | 200.3            | 60" RCP PR11, PR12      |

| REVISED POND 4 FSD BASIN DATA   | REVISED POND W-9 FSD BASIN DATA |
|---------------------------------|---------------------------------|
| WQ WATER SURFACE EL = 7056.39   | WQ WATER SURFACE EL = 7086.59   |
| WQ VOLUME=0.046 AC-FT           | WQ VOLUME=0.092 AC-FT           |
| EURY WATER SURFACE EL = 7058.46 | EURY WATER SURFACE EL = 7087.99 |
| EURY VOLUME=1.510 AC-FT         | EURY VOLUME=0.390 AC-FT         |
| 100-YR WATER SURFACE EL=7059.98 | 100-YR WATER SURFACE EL=7088.84 |
| SPILLWAY CREST EL=7060.0        | SPILLWAY CREST EL=7088.84       |
| TOP OF EMBANKMENT EL=7063.0     | TOP OF EMBANKMENT EL=7090.5     |
| 100-YR VOLUME=2.915 AC-FT       | 100-YR VOLUME=0.638 AC-FT       |
| 100-YR INFLOW = 105.3 CFS       | 100-YR INFLOW = 21.2 CFS        |
| 100-YR RELEASE = 36.8 CFS       | 100-YR RELEASE = 8.7 CFS        |

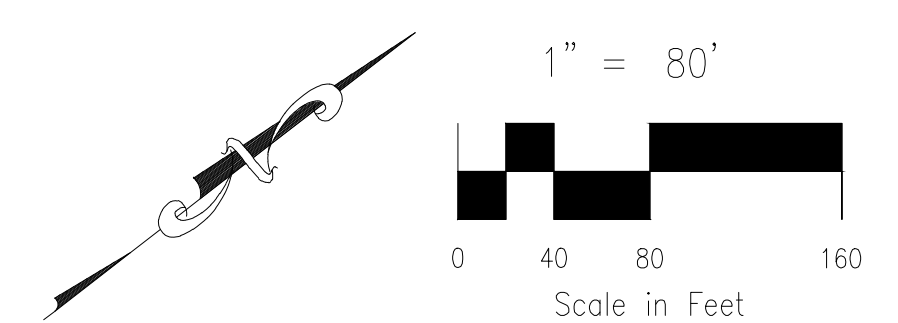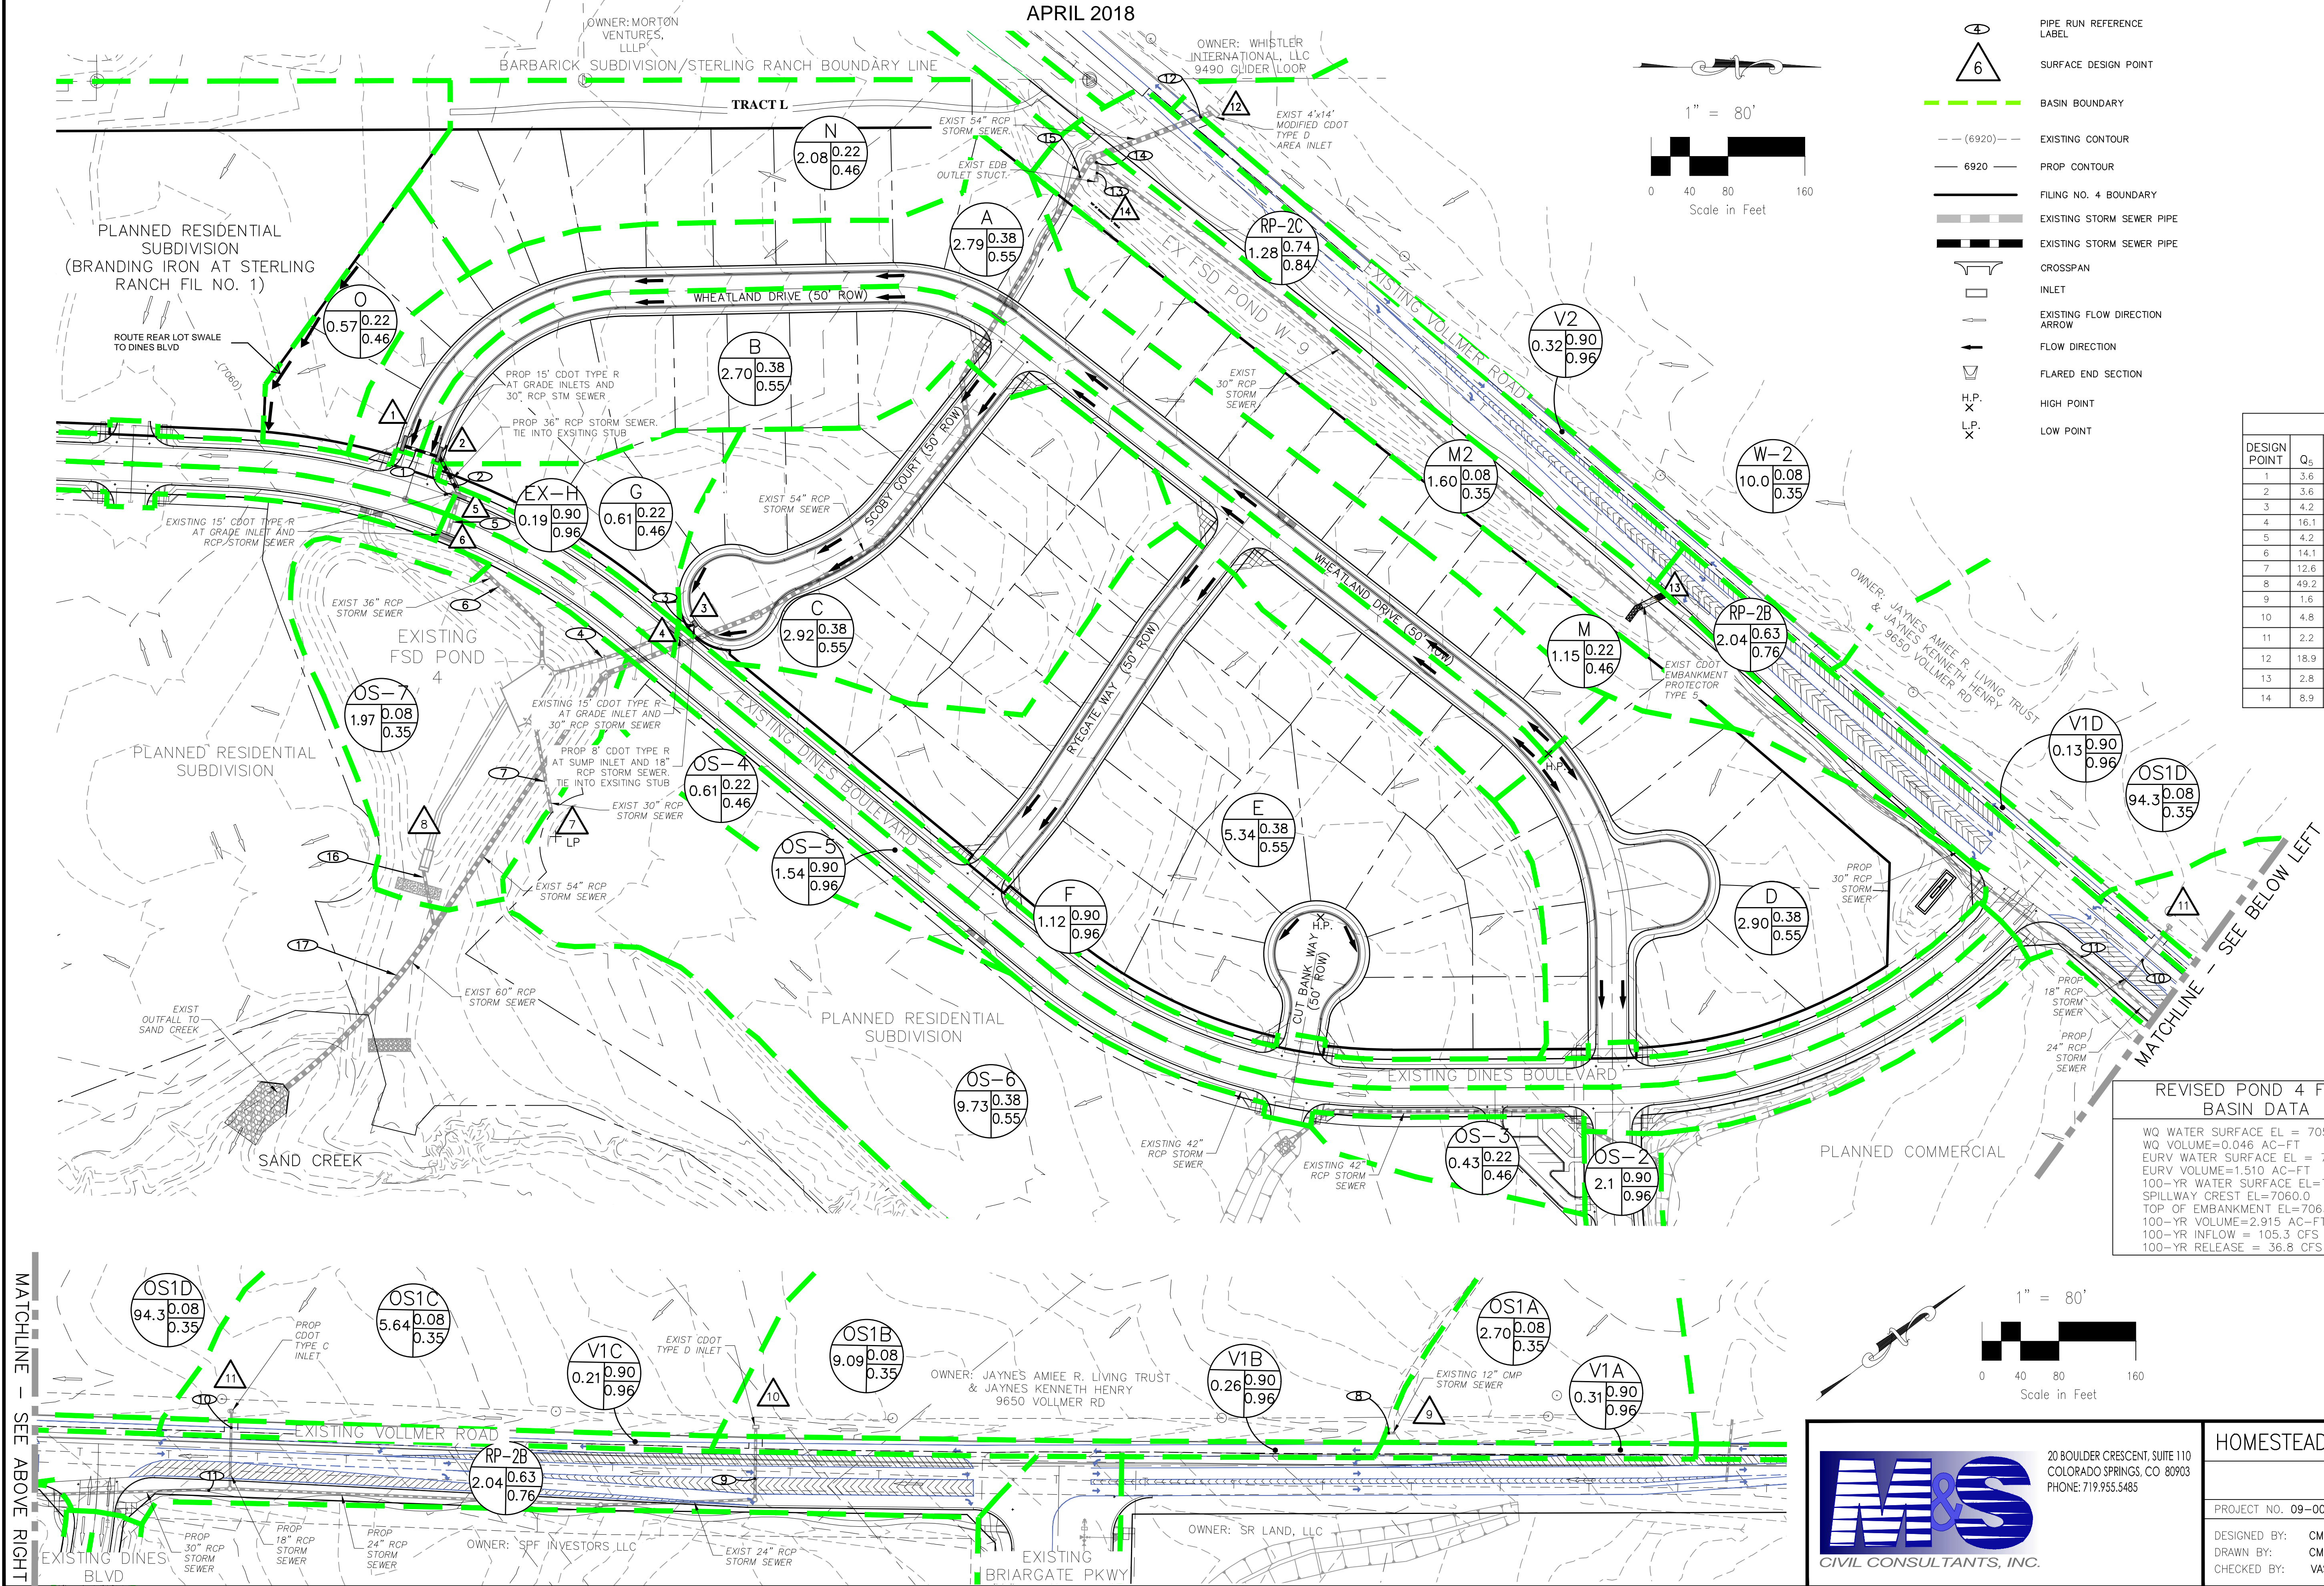

FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES  
FOR BURIED UTILITY INFORMATION  
48 HRS BEFORE YOU DIG  
CALL 1-800-922-1987

**M&S CIVIL CONSULTANTS, INC.**  
20 BOULDER CRESCENT, SUITE 110  
COLORADO SPRINGS, CO 80903  
PHONE: 719.955.5485

**HOMESTEAD AT STERLING RANCH FIL NO. 1**  
**FINAL DRAINAGE MAP**

|                    |   |                 |
|--------------------|---|-----------------|
| PROJECT NO. 09-005 | SCALE: HORIZONTAL: 1"=80' VERTICAL: N/A | DATE: 4/12/2018 |
| DESIGNED BY: CMN   | CHECKED BY: VAS                         | SHEET 1 OF 1    |
|                    |   | FDM01           |

File: C:\Users\mcfarrell\MyDocuments\Temp\Proposed Drainage Map\_1\_1\_53056.dwg Plotstamp: 4/24/2018 10:06 AM



**FINAL DRAINAGE REPORT FOR  
HOMESTEAD AT STERLING RANCH  
FILING NO. 2**

**EL PASO COUNTY, COLORADO**

January 2020

Prepared for:  
**SR Land, LLC**  
**20 Boulder Crescent, Suite 210**  
**Colorado Springs, CO 80903**

Prepared by:



**20 Boulder Crescent, Suite 110**  
**Colorado Springs, CO 80903**  
**(719) 955-5485**

Project #09-007  
SF -19-004

respectively. The total combined developed area being discharge to the channel is less than one acre. It is not practicable to provide WQCV for these areas, as stated earlier in this paragraph, areas consists primarily of vegetated tracts with no development.

## **CHANNEL IMPROVEMENTS**

Slope grading and intermittent channel bank lining has been proposed for portions of the developable areas adjacent to Sand Creek to protect the developed lots and prevent excessive erosion until the DBPS recommended Sand Creek Channel improvements are installed. The proposed slope grading is intended to reduce outer bank grades and bring uniformity to areas where significant riling and destabilization has occurred. Proposed channel stabilization improvements includes placement of soil riprap and turf reinforcement matting along embankment toes and along embankment slopes, both of which will function to retain soils and vegetation during heavy rains or larger flood flow events. All disturbed areas, not hardscaped will be re-vegetated with native species grasses, per El Paso County erosion control standards. Storm sewer outfalls into Sand Creek shall be protected by low-tailwater riprap basins. The outfall protection is shown on the accompanying drainage map in the appendix. Refer to the Homestead Filing No.2 Grading and Erosion Control Plans for riprap and turf reinforcement map placement and construction details.

Permanently installed check structures and rip-rap channel lining will be installed within Sand Creek Channel to handle the runoff from fully developed Sterling Ranch and up-gradient watershed in accordance with the Sand Creek DBPS. A discussion regarding the timing of these channel improvements is provided in a subsequent paragraph titled Sterling Ranch Filing No. 1 Subdivision Improvement agreement which follows the Construction Costs segment of this report. Financial Assurance shall be posted for the proposed Sand Creek Channel Improvements and Bank Stabilization (Slope Protection and grade control structures).

## **WATER QUALITY PROVISIONS**

The proposed Full Spectrum Detention Facility, Pond 1 functions to provide detention storage and water quality facility for runoff produced onsite from tributary Basins T, U, V1, V2 and W3. This water quality facility is designed to treat 0.245 ac-ft of water quality storage (WQCV), 0.741 ac-feet of excess urban runoff volume (EURV) and 1.331 ac-ft of 100-year storage. A rolled erosion control blanketed emergency spillway, concrete forebay, trickle channel and outlet structure, and gravel maintenance access road has been designed for Pond 1.

A 24" RCP pipe extending from the proposed modified 6'x2.9' CDOT Type D sump inlet (see Design Point 13) will convey discharge from the pond to Sand Creek. Runoff discharged to Sand Creek is anticipated to reach peak flow rates of Q5=0.7 cfs and Q100=23.4 cfs. A soil riprap stilling basin has been provided at the termination of the pipe to arrest erosion.

Runoff produced within the residential backyard lots, of Basins X1, X2, W1 and Y1 will be conveyed in backyard swales and as sheet flow to a Sand Filter Basin within each lot. The treated flows will be collected by private storm sewer systems and discharged into the Sand Creek Channel. This water quality facility, for each Sand Filter Basin, is designed to treat 0.001 ac-ft of water quality storage (WQCV), 0.005 ac-feet of excess urban runoff volume (EURV) and 0.014 ac-ft of 100-year storage. A 20' wide typical drainage easement is provided within the lots to accommodate the BMP's. The facilities constructed are to be privately maintained by the Sterling Ranch metro district.


The WQCV and EURV required for the site has been determined using the guidelines set forth in the City of Colorado Springs/El Paso County Drainage Criteria Manual - Volume II. Refer to the water quality





## DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

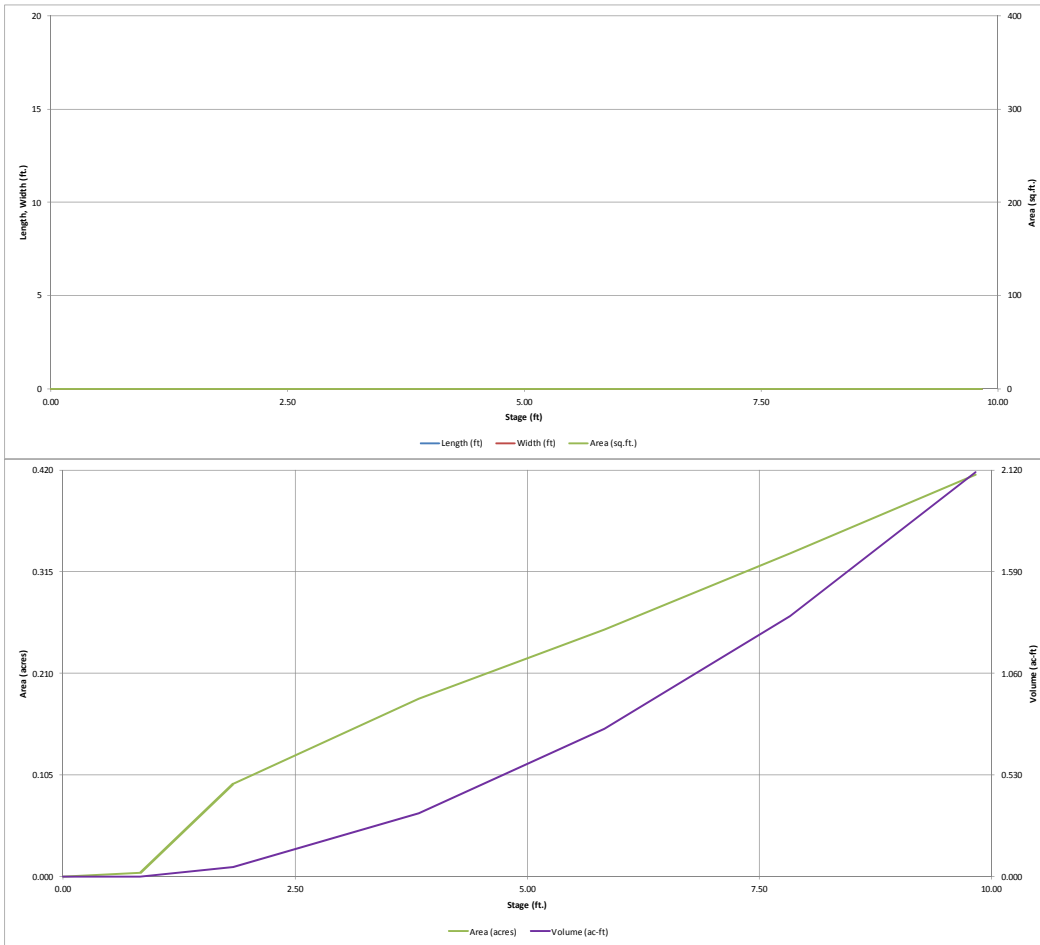


# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: \_\_\_\_\_

Basin ID: \_\_\_\_\_

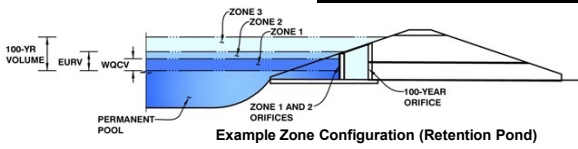

|                   | Stage (ft) | Zone Volume (ac-ft) | Outlet Type          |
|-------------------|------------|---------------------|----------------------|
| Zone 1 (WQCV)     | 3.45       | 0.262               | Orifice Plate        |
| Zone 2 (EURV)     | 5.84       | 0.508               | Orifice Plate        |
| Zone 3 (100-year) | 8.00       | 0.642               | Weir&Pipe (Restrict) |
|                   |            | 1.412               | Total                |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

|                                   |     |  |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter =     | N/A | inches   |

Calculated Parameters for Underdrain

|                               |     |                 |
|-------------------------------|-----|-----------------|
| Underdrain Orifice Area =     | N/A | ft <sup>2</sup> |
| Underdrain Orifice Centroid = | N/A | feet            |

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

|  |       |   |
|--|-------|---|
| Invert of Lowest Orifice =                 | 0.00  | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 5.84  | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing =  | 23.40 | inches  |
| Orifice Plate: Orifice Area per Row =      | 1.19  | sq. inches (diameter = 1-3/16 inches)         |

Calculated Parameters for Plate

|                            |           |                 |
|----------------------------|-----------|-----------------|
| WQ Orifice Area per Row =  | 8.264E-03 | ft <sup>2</sup> |
| Elliptical Half-Width =    | N/A       | feet            |
| Elliptical Slot Centroid = | N/A       | feet            |
| Elliptical Slot Area =     | N/A       | ft <sup>2</sup> |

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.95             | 3.89             |                  |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 1.19             | 1.19             | 1.19             |                  |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

User Input: Vertical Orifice (Circular or Rectangular)

|   | Not Selected | Not Selected |   |
|---|--------------|--------------|---|
| Invert of Vertical Orifice =                  | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | N/A          | N/A          | inches  |

Calculated Parameters for Vertical Orifice

|                             | Not Selected | Not Selected |                 |
|-----------------------------|--------------|--------------|-----------------|
| Vertical Orifice Area =     | N/A          | N/A          | ft <sup>2</sup> |
| Vertical Orifice Centroid = | N/A          | N/A          | feet            |

User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)

|                                       | Zone 3 Weir | Not Selected |   |
|---------------------------------------|-------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 5.84        | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 6.00        | N/A          | feet  |
| Overflow Weir Slope =                 | 3.00        | N/A          | H:V (enter zero for flat grate)               |
| Horiz. Length of Weir Sides =         | 2.91        | N/A          | feet  |
| Overflow Grate Open Area % =          | 70%         | N/A          | %, grate open area/total area                 |
| Debris Clogging % =                   | 50%         | N/A          | %   |

Calculated Parameters for Overflow Weir

|  | Zone 3 Weir | Not Selected |                 |
|--|-------------|--------------|-----------------|
| Height of Grate Upper Edge, H <sub>1</sub> = | 6.81        | N/A          | feet            |
| Over Flow Weir Slope Length =                | 3.07        | N/A          | feet            |
| Grate Open Area / 100-yr Orifice Area =      | 7.21        | N/A          | should be ≥ 4   |
| Overflow Grate Open Area w/o Debris =        | 12.88       | N/A          | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | 6.44        | N/A          | ft <sup>2</sup> |

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

|   | Zone 3 Restrictor | Not Selected |  |
|---|-------------------|--------------|--|
| Depth to Invert of Outlet Pipe =            | 0.25              | N/A          | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 24.00             | N/A          | inches   |
| Restrictor Plate Height Above Pipe Invert = | 13.30             |              | inches   |

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

|  | Zone 3 Restrictor | Not Selected |                 |
|--|-------------------|--------------|-----------------|
| Outlet Orifice Area =                            | 1.79              | N/A          | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | 0.63              | N/A          | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | 1.68              | N/A          | radians         |

User Input: Emergency Spillway (Rectangular or Trapezoidal)

|                                     |       |   |
|-------------------------------------|-------|---|
| Spillway Invert Stage =             | 7.80  | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length =             | 17.00 | feet  |
| Spillway End Slopes =               | 4.00  | H:V   |
| Freeboard above Max Water Surface = | 1.00  | feet  |

Calculated Parameters for Spillway




|                                  |      |       |
|----------------------------------|------|-------|
| Spillway Design Flow Depth =     | 0.89 | feet  |
| Stage at Top of Freeboard =      | 9.69 | feet  |
| Basin Area at Top of Freeboard = | 0.41 | acres |

## Routed Hydrograph Results

|   | WQCV  | EURV  | 2 Year | 5 Year           | 10 Year          | 25 Year          | 50 Year        | 100 Year       | 500 Year |
|---|-------|-------|--------|------------------|------------------|------------------|----------------|----------------|----------|
| Design Storm Return Period                  |       |       |        |                  |                  |                  |                |                |          |
| One-Hour Rainfall Depth (in)                | 0.53  | 1.07  | 1.19   | 1.50             | 1.75             | 2.00             | 2.25           | 2.52           | 0.00     |
| Calculated Runoff Volume (acre-ft)          | 0.262 | 0.771 | 0.614  | 0.847            | 1.177            | 1.710            | 2.073          | 2.550          | 0.000    |
| OPTIONAL Override Runoff Volume (acre-ft)   |       |       |        |                  |                  |                  |                |                |          |
| Inflow Hydrograph Volume (acre-ft)          | 0.262 | 0.771 | 0.614  | 0.847            | 1.176            | 1.710            | 2.074          | 2.551          | #N/A     |
| Predevelopment Unit Peak Flow, q (cfs/acre) | 0.00  | 0.00  | 0.02   | 0.03             | 0.27             | 0.84             | 1.16           | 1.55           | 0.00     |
| Predevelopment Peak Q (cfs)                 | 0.0   | 0.0   | 0.3    | 0.4              | 4.4              | 13.9             | 19.2           | 25.5           | 0.0      |
| Peak Inflow Q (cfs)                         | 5.3   | 15.5  | 12.4   | 17.0             | 23.5             | 34.1             | 41.2           | 50.5           | #N/A     |
| Peak Outflow Q (cfs)                        | 0.1   | 0.2   | 0.2    | 0.7              | 6.0              | 15.8             | 22.3           | 23.4           | #N/A     |
| Ratio Peak Outflow to Predevelopment Q      | N/A   | N/A   | N/A    | 1.5              | 1.4              | 1.1              | 1.2            | 0.9            | #N/A     |
| Structure Controlling Flow                  | Plate | Plate | Plate  | Overflow Grate 1 | Overflow Grate 1 | Overflow Grate 1 | Outlet Plate 1 | Outlet Plate 1 | #N/A     |
| Max Velocity through Grate 1 (fps)          | N/A   | N/A   | N/A    | 0.0              | 0.4              | 1.2              | 1.7            | 1.8            | #N/A     |
| Max Velocity through Grate 2 (fps)          | N/A   | N/A   | N/A    | N/A              | N/A              | N/A              | N/A            | N/A            | #N/A     |
| Time to Drain 97% of Inflow Volume (hours)  | 39    | 69    | 62     | 71               | 69               | 66               | 63             | 61             | #N/A     |
| Time to Drain 99% of Inflow Volume (hours)  | 40    | 73    | 65     | 76               | 75               | 74               | 73             | 72             | #N/A     |
| Maximum Ponding Depth (ft)                  | 3.35  | 5.72  | 5.08   | 5.96             | 6.44             | 6.91             | 7.15           | 7.75           | #N/A     |
| Area at Maximum Ponding Depth (acres)       | 0.16  | 0.25  | 0.23   | 0.26             | 0.28             | 0.30             | 0.31           | 0.33           | #N/A     |
| Maximum Volume Stored (acre-ft)             | 0.245 | 0.741 | 0.588  | 0.802            | 0.932            | 1.067            | 1.137          | 1.331          | #N/A     |

# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

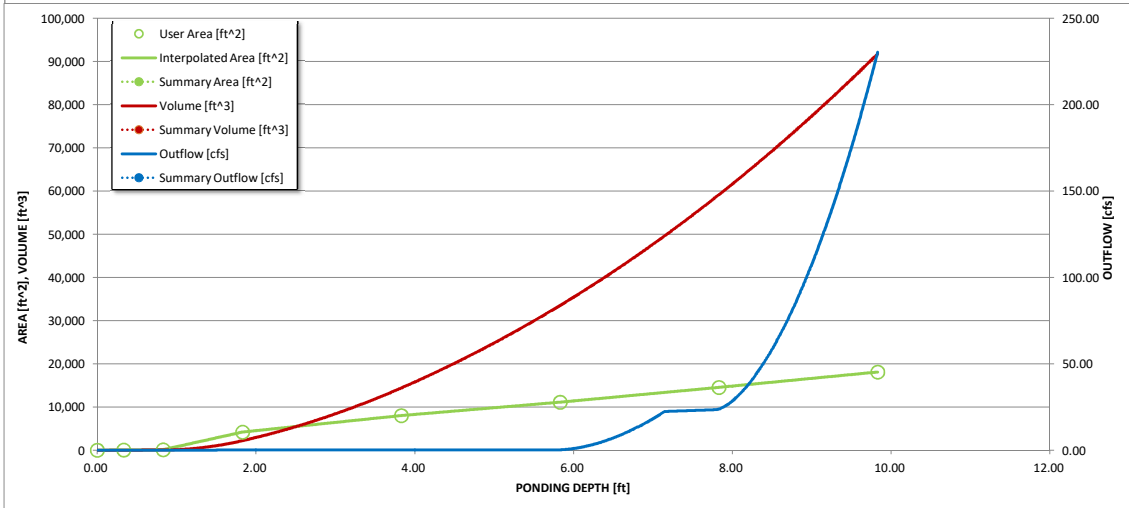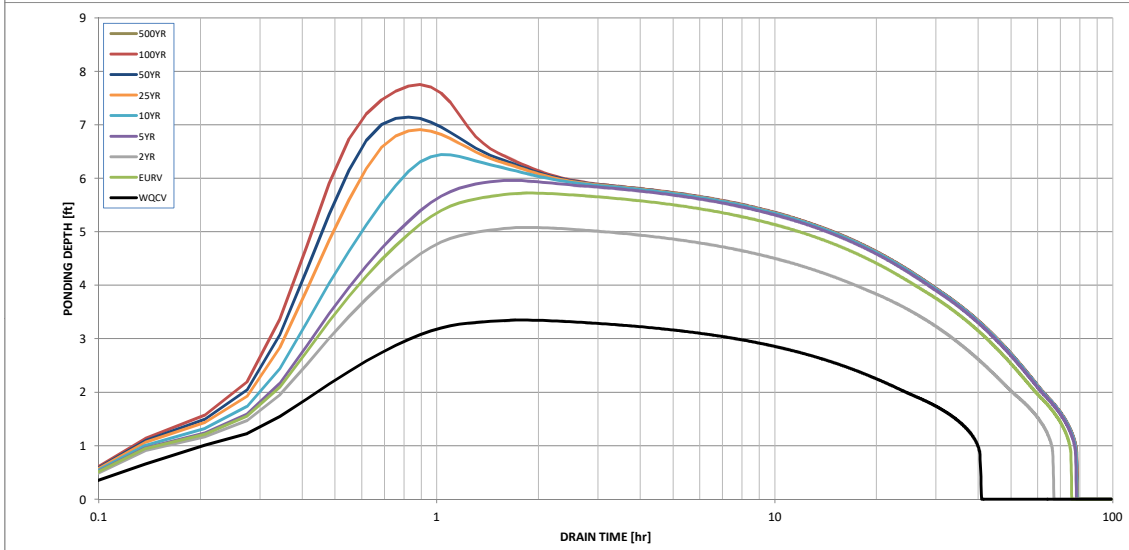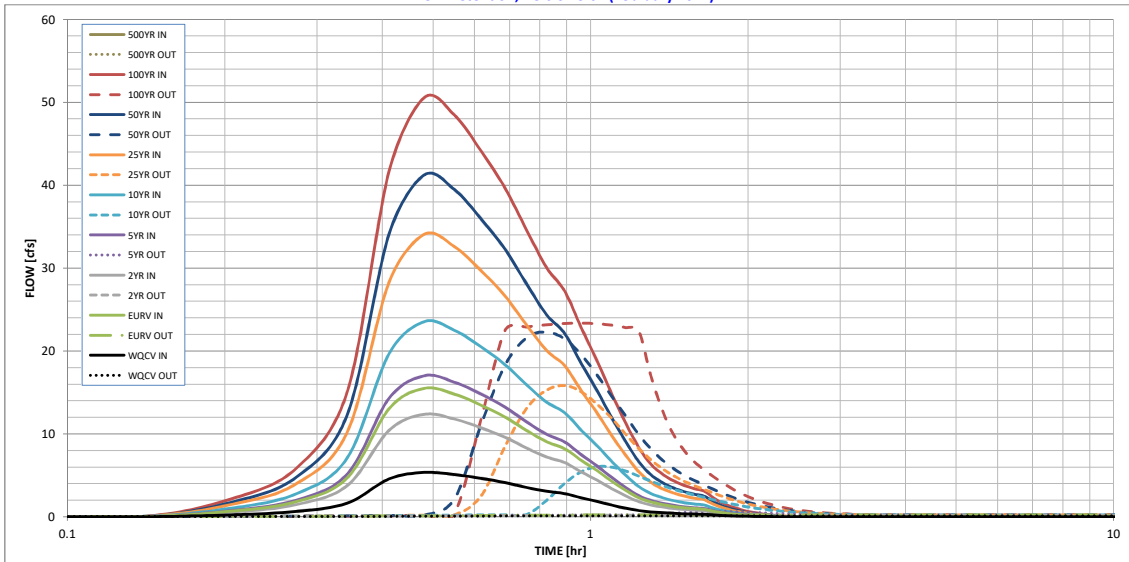

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound               |        |             |              |
| maximum bound               |        |             |              |





WLD RIDGE  
FILING NO. 2  
EPC

SUB-BASIN EX3

SUB-BASIN EX3

SUB-BASIN EX3



EPC  
\*UNPLATTED\*

SUB-BASIN EX3

SUB-BASIN EX3

SUB-BASIN EX3

STERLING RANCH FILING NO. 1  
PROPOSED FINAL DRAINAGE MAP  
PROJECT NO. 09-002 DATE: 1/2/2018  
SCALE: HORIZONTAL: 1"=100' VERTICAL: N/A  
DESIGNED BY: ET DRAWN BY: BB CHECKED BY: GT  
SHEET 4 OF 4 SHEET 4

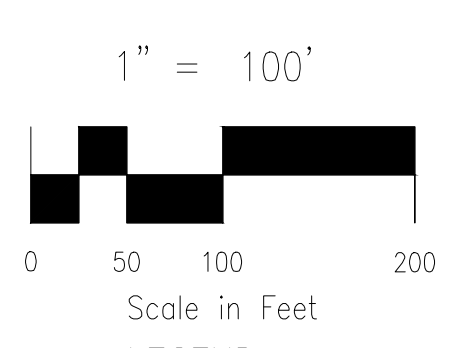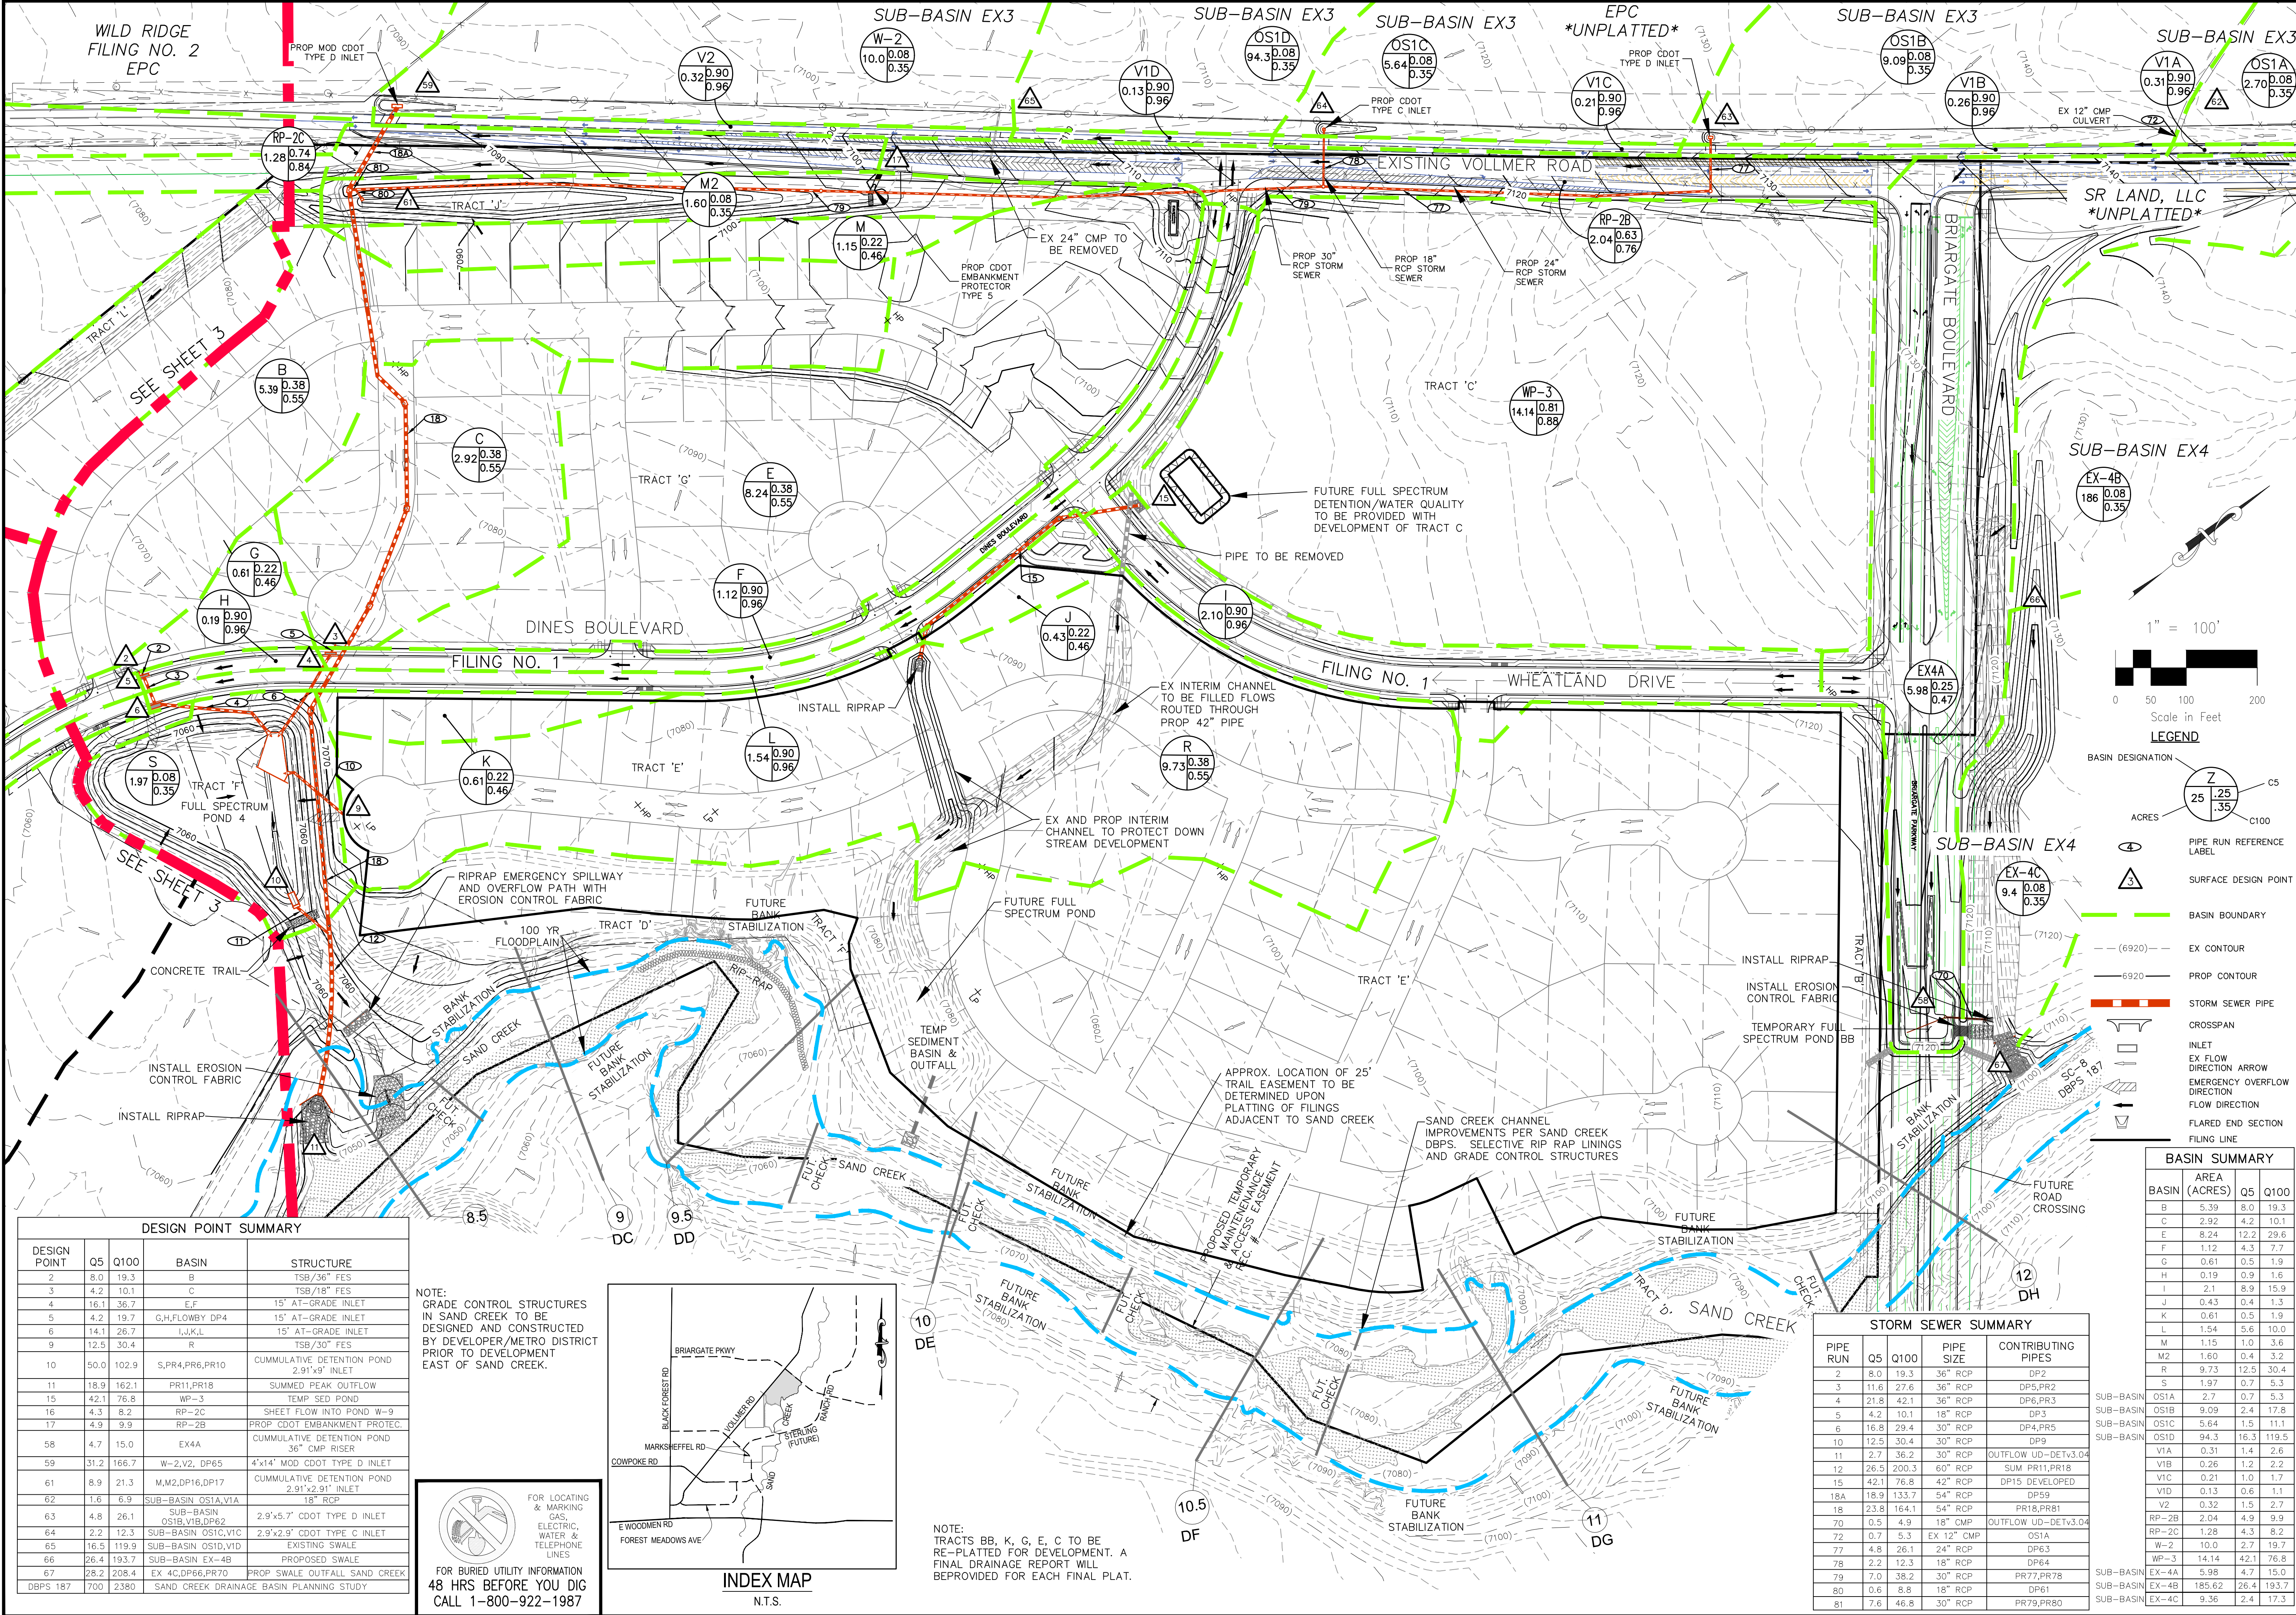

- LEGEND**
- BASIN DESIGNATION: Z (25, .25, .35) C5
  - ACRES: 4, 3
  - PIPE RUN REFERENCE LABEL: 4, 3
  - SURFACE DESIGN POINT: 4, 3
  - BASIN BOUNDARY: (dashed line)
  - EX CONTOUR: (dashed line)
  - PROP CONTOUR: (solid line)
  - STORM SEWER PIPE: (thick red line)
  - CROSSSPAN: (rectangle)
  - INLET: (trapezoid)
  - EX FLOW DIRECTION ARROW: (arrow)
  - EMERGENCY OVERFLOW DIRECTION: (arrow)
  - FLOW DIRECTION: (arrow)
  - FLARED END SECTION: (trapezoid)
  - FILING LINE: (dashed line)

BASIN SUMMARY

| BASIN           | AREA (ACRES) | Q5   | Q100  |
|-----------------|--------------|------|-------|
| B               | 5.39         | 8.0  | 19.3  |
| C               | 2.92         | 4.2  | 10.1  |
| E               | 8.24         | 12.2 | 29.6  |
| F               | 1.12         | 4.3  | 7.7   |
| G               | 0.61         | 0.5  | 1.9   |
| H               | 0.19         | 0.9  | 1.6   |
| I               | 2.1          | 8.9  | 15.9  |
| J               | 0.43         | 0.4  | 1.3   |
| K               | 0.61         | 0.5  | 1.9   |
| L               | 1.54         | 5.6  | 10.0  |
| M               | 1.15         | 1.0  | 3.6   |
| M2              | 1.60         | 0.4  | 3.2   |
| R               | 9.73         | 12.5 | 30.4  |
| S               | 1.97         | 0.7  | 5.3   |
| SUB-BASIN OS1A  | 2.7          | 0.7  | 5.3   |
| SUB-BASIN OS1B  | 9.09         | 2.4  | 17.8  |
| SUB-BASIN OS1C  | 5.64         | 1.5  | 11.1  |
| SUB-BASIN OS1D  | 94.3         | 16.3 | 119.5 |
| SUB-BASIN DP9   |              |      |       |
| VIA             | 0.31         | 1.4  | 2.6   |
| VIB             | 0.26         | 1.2  | 2.2   |
| VIC             | 0.21         | 1.0  | 1.7   |
| VID             | 0.13         | 0.6  | 1.1   |
| VP2             | 0.32         | 1.5  | 2.7   |
| VP2-2B          | 2.04         | 4.9  | 9.9   |
| RP-2C           | 1.28         | 4.3  | 8.2   |
| W-2             | 10.0         | 2.7  | 19.7  |
| WP-3            | 14.14        | 4.2  | 17.6  |
| SUB-BASIN EX-4A | 5.98         | 2.4  | 17.8  |
| SUB-BASIN EX-4B | 186          | 26.4 | 193.7 |
| SUB-BASIN EX-4C | 9.36         | 2.4  | 17.3  |


STORM SEWER SUMMARY

| PIPE RUN | Q5   | Q100  | PIPE SIZE  | CONTRIBUTING PIPES |
|----------|------|-------|------------|--------------------|
| 2        | 8.0  | 19.3  | 36" RCP    | DP2                |
| 3        | 11.6 | 27.6  | 36" RCP    | DP5,PR2            |
| 4        | 21.8 | 42.1  | 36" RCP    | DP6,PR3            |
| 5        | 4.2  | 10.1  | 18" RCP    | DP3                |
| 6        | 16.8 | 29.4  | 30" RCP    | DP4,PR5            |
| 10       | 12.5 | 30.4  | 30" RCP    | DP9                |
| 11       | 2.7  | 36.2  | 30" RCP    | OUTFLOW UD-DET3.04 |
| 12       | 26.5 | 200.3 | 60" RCP    | SUM PR11,PR18      |
| 15       | 42.1 | 76.8  | 42" RCP    | DP15 DEVELOPED     |
| 18A      | 18.9 | 133.7 | 54" RCP    | DP59               |
| 18       | 23.8 | 164.1 | 54" RCP    | PR18,PR1           |
| 70       | 0.5  | 4.9   | 18" CMP    | OUTFLOW UD-DET3.04 |
| 72       | 0.7  | 5.3   | EX 12" CMP | OS1A               |
| 77       | 4.8  | 26.1  | 24" RCP    | DP63               |
| 78       | 2.2  | 12.3  | 18" RCP    | DP64               |
| 79       | 7.0  | 38.2  | 30" RCP    | PR77,PR78          |
| 80       | 0.6  | 8.8   | 18" RCP    | DP61               |
| 81       | 7.6  | 46.8  | 30" RCP    | PR79,PR80          |

**DESIGN POINT SUMMARY**

| DESIGN POINT | Q5   | Q100  | BASIN                                    | STRUCTURE                                   |
|--------------|------|-------|--|---|
| 2            | 8.0  | 19.3  | B  | TSB/36" FES                                 |
| 3            | 4.2  | 10.1  | C  | TSB/18" FES                                 |
| 4            | 16.1 | 36.7  | E,F                                      | 15" AT-GRADE INLET                          |
| 5            | 4.2  | 19.7  | G,H,FLOWBY DP4                           | 15" AT-GRADE INLET                          |
| 6            | 14.1 | 26.7  | I,J,K,L                                  | 15" AT-GRADE INLET                          |
| 9            | 12.5 | 30.4  | R  | TSB/30" FES                                 |
| 10           | 50.0 | 102.9 | S,PR4,PR6,PR10                           | CUMULATIVE DETENTION POND 2.91'x9' INLET    |
| 11           | 18.9 | 162.1 | PR11,PR18                                | SUMMED PEAK OUTFLOW                         |
| 15           | 42.1 | 76.8  | WP-3                                     | TEMP SED POND                               |
| 16           | 4.3  | 8.2   | RP-2C                                    | SHEET FLOW INTO POND W-9                    |
| 17           | 4.9  | 9.9   | RP-2B                                    | PROP CDOT EMBANKMENT PROTEC.                |
| 58           | 4.7  | 15.0  | EX4A                                     | CUMULATIVE DETENTION POND 36" CMP RISER     |
| 59           | 31.2 | 166.7 | W-2,V2, DP65                             | 4'x14' MOD CDOT TYPE D INLET                |
| 61           | 8.9  | 21.3  | M,M2,DP16,DP17                           | CUMULATIVE DETENTION POND 2.91'x2.91' INLET |
| 62           | 1.6  | 6.9   | SUB-BASIN OS1A,VIA                       | 18" RCP                                     |
| 63           | 4.8  | 26.1  | SUB-BASIN OS1B,VIB,DP62                  | 2.9'x5.7' CDOT TYPE D INLET                 |
| 64           | 2.2  | 12.3  | SUB-BASIN OS1C,VIC                       | 2.9'x2.9' CDOT TYPE C INLET                 |
| 65           | 16.5 | 119.9 | SUB-BASIN OS1D,VID                       | EXISTING SWALE                              |
| 66           | 26.4 | 193.7 | SUB-BASIN EX-4B                          | PROPOSED SWALE                              |
| 67           | 28.2 | 208.4 | EX 4C,DP66,PR70                          | PROP SWALE OUTFALL SAND CREEK               |
| DBPS 187     | 700  | 2380  | SAND CREEK DRAINAGE BASIN PLANNING STUDY |   |

NOTE: GRADE CONTROL STRUCTURES IN SAND CREEK TO BE DESIGNED AND CONSTRUCTED BY DEVELOPER/METRO DISTRICT PRIOR TO DEVELOPMENT EAST OF SAND CREEK.

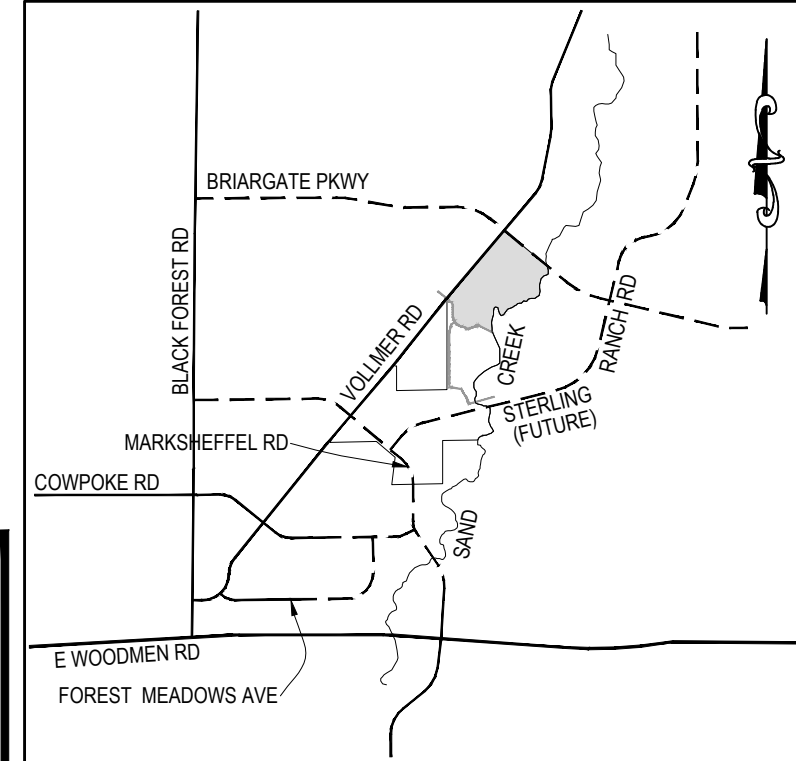

INDEX MAP  
N.T.S.

NOTE: TRACTS BB, K, G, E, C TO BE RE-PLATTED FOR DEVELOPMENT. A FINAL DRAINAGE REPORT WILL BE PROVIDED FOR EACH FINAL PLAT.

File: C:\080026\Sterling Ranch District\Map\080026\080026-Filing-1-Drainage-Map-SHEET 4.dwg PlotStamp: 1/13/2020 4:41 PM

20 BOULDER CRESCENT SUITE 110  
COLORADO SPRINGS, CO 80903  
PHONE: 719.555.5485

CIVIL CONSULTANTS, INC.

FOR AND ON BEHALF OF  
M&S CIVIL CONSULTANTS, INC.

REVISIONS: NO. DATE: BY: DESCRIPTION:

THE ENGINEER PREPARED THESE PLANS WILL NOT BE RESPONSIBLE OR LIABLE FOR UNAUTHORIZED CHANGES TO OR USES OF THESE PLANS. ALL CHANGES TO THE PLANS MUST BE IN WRITING AND MUST BE APPROVED BY THE PREPARER OF THESE PLANS.

CAUTION



# HOMESTEAD AT STERLING RANCH FILING NO. 2


## COUNTY OF EL PASO, STATE OF COLORADO

### PROPOSED DRAINAGE MAP

JANUARY 2020

#### LEGEND

- BASIN DESIGNATION: BASIN DESIGNATION
- PIPE RUN REFERENCE LABEL: PIPE RUN REFERENCE LABEL
- SURFACE DESIGN POINT: SURFACE DESIGN POINT
- BASIN BOUNDARY: BASIN BOUNDARY
- EXISTING CONTOUR: EXISTING CONTOUR
- PROP CONTOUR: PROP CONTOUR
- HOMESTEAD FILING NOS. 2&3 BOUNDARY: HOMESTEAD FILING NOS. 2&3 BOUNDARY
- PROPOSED STORM SEWER PIPE: PROPOSED STORM SEWER PIPE
- EXISTING STORM SEWER PIPE: EXISTING STORM SEWER PIPE
- CROSSSPAN: CROSSSPAN
- INLET: INLET
- EXISTING FLOW DIRECTION ARROW: EXISTING FLOW DIRECTION ARROW
- PROPOSED FLOW DIRECTION ARROW: PROPOSED FLOW DIRECTION ARROW
- FLARED END SECTION: FLARED END SECTION
- H.P. X: HIGH POINT
- L.P. X: LOW POINT

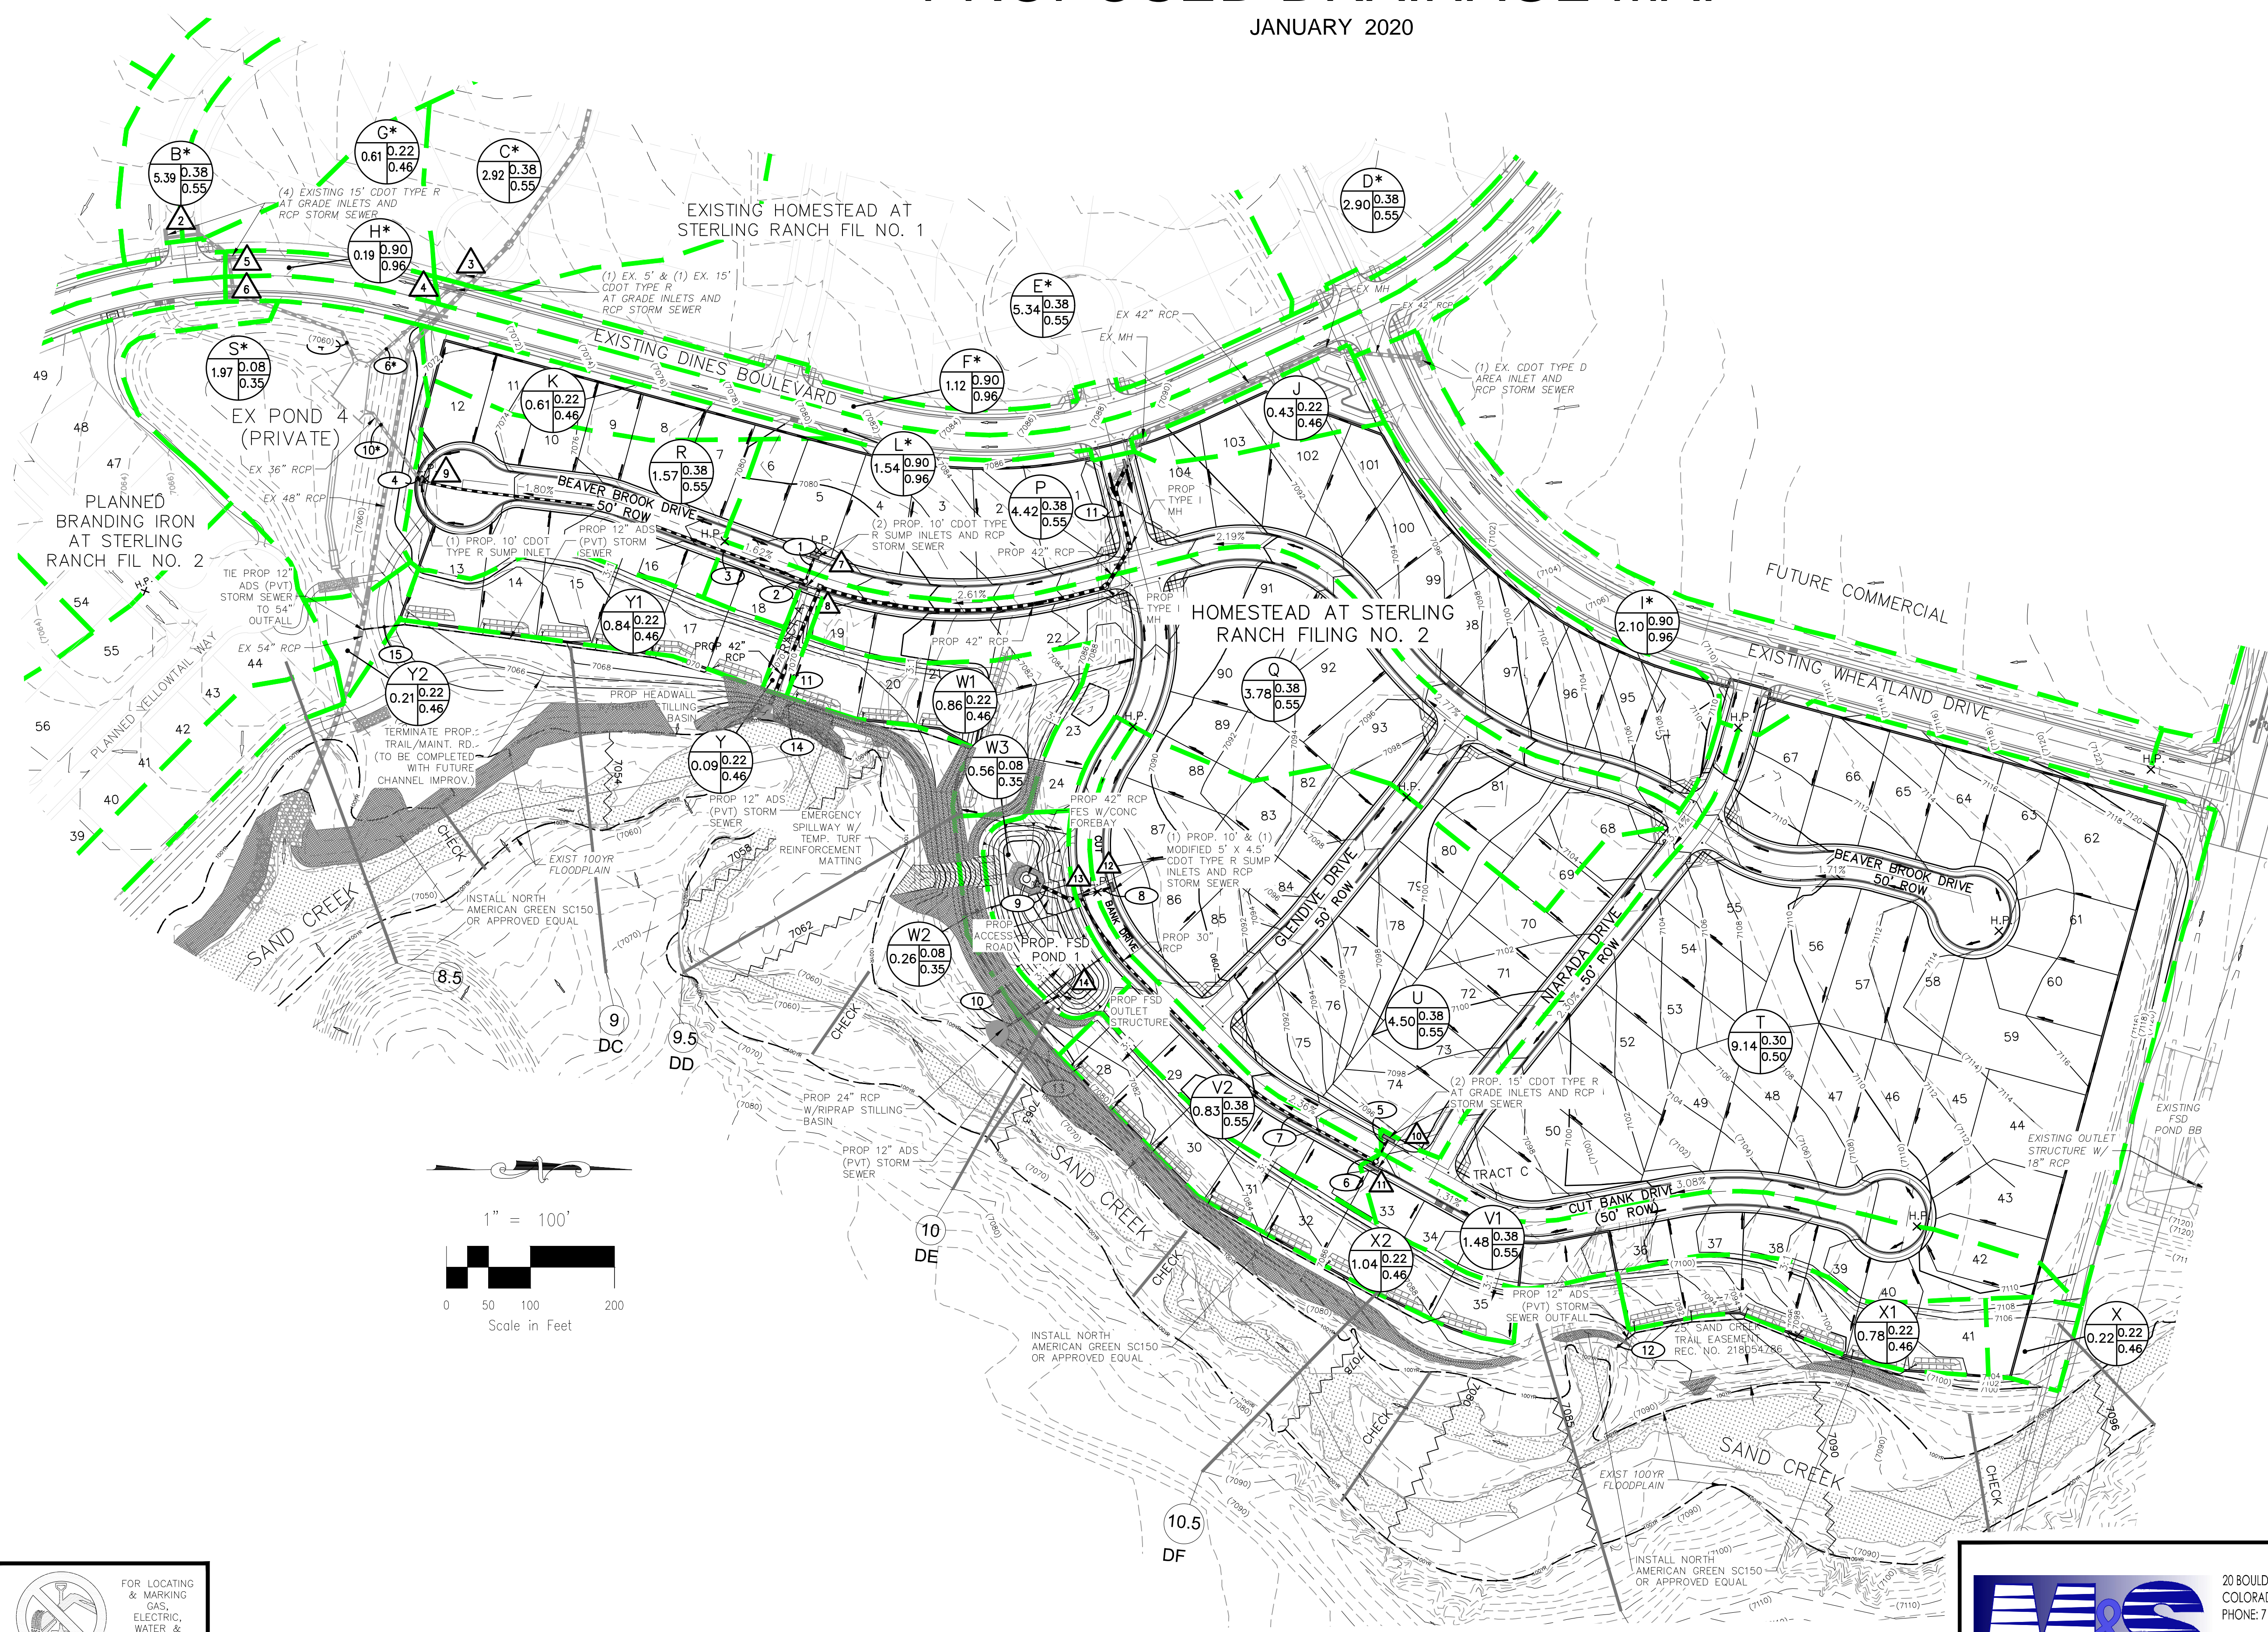

| STORM SEWER SUMMARY |                |                  |           |                                  |
|---------------------|----------------|------------------|-----------|----------------------------------|
| PIPE RUN            | Q <sub>s</sub> | Q <sub>100</sub> | PIPE SIZE | CONTRIBUTING PIPES/DESIGN POINTS |
| 1                   | 5.7            | 13.8             | 18" RCP   | DP7                              |
| 2                   | 4.9            | 11.8             | 18" RCP   | DP8                              |
| 3                   | 10.6           | 25.7             | 24" RCP   | PR1, PR2                         |
| 4                   | 12.4           | 30.1             | 30" RCP   | DP9, PR3                         |
| 5                   | 9.1            | 12.7             | 18" RCP   | DP10                             |
| 6                   | 1.9            | 12.7             | 18" RCP   | DP11                             |
| 7                   | 10.9           | 25.3             | 30" RCP   | PR5, PR6                         |
| 8                   | 6.2            | 17.2             | 24" RCP   | DP12                             |
| 9                   | 17.9           | 47.1             | 42" RCP   | DP13, PR7, PR8                   |
| 10                  | 0.7            | 23.5             | 24" RCP   | OUTLET STRUC.                    |
| 11                  | 42.1           | 76.8             | 42" RCP   | CONTINUED FROM MDDP PIPE#5       |
| 12                  | 0.0            | 1.3              | 12" ADS   | LOTS 36-41                       |
| 13                  | 0.0            | 1.6              | 12" ADS   | LOTS 28-35                       |
| 14                  | 0.0            | 1.5              | 12" ADS   | LOTS 19-24                       |
| 15                  | 0.0            | 1.4              | 12" ADS   | LOTS 13-18                       |
| 4*                  | 21.8           | 42.1             | 36" RCP   | SEE MDDP*                        |
| 6*                  | 16.8           | 29.4             | 30" RCP   | SEE MDDP*                        |
| 10*                 | 12.5           | 30.4             | 30" RCP   | SEE MDDP*                        |


| BASIN SUMMARY |              |                |                  |  |
|---------------|--------------|----------------|------------------|--|
| BASIN         | AREA (ACRES) | Q <sub>s</sub> | Q <sub>100</sub> |  |
| ONSITE BASINS |              |                |                  |  |
| J             | 0.43         | 0.4            | 1.3              |  |
| K             | 0.61         | 0.5            | 1.9              |  |
| P             | 4.42         | 5.7            | 13.8             |  |
| Q             | 3.78         | 4.9            | 11.8             |  |
| R             | 1.57         | 2.2            | 5.4              |  |
| T             | 9.14         | 9.4            | 26.4             |  |
| U             | 4.50         | 6.4            | 15.6             |  |
| V1            | 1.48         | 2.1            | 5.0              |  |
| V2            | 0.83         | 1.2            | 2.9              |  |
| W1            | 0.56         | 0.2            | 1.7              |  |
| W2            | 0.26         | 0.1            | 0.8              |  |
| W3            | 0.56         | 0.2            | 1.7              |  |
| X             | 0.22         | 0.2            | 0.8              |  |
| X1            | 0.78         | 0.8            | 2.8              |  |
| X2            | 1.04         | 1.1            | 3.7              |  |
| Y             | 0.09         | 0.1            | 0.3              |  |
| Y1            | 0.84         | 0.8            | 3.0              |  |
| Y2            | 0.21         | 0.2            | 0.7              |  |
| B*            | 5.39         | 8.0            | 19.3             |  |
| C*            | 2.92         | 4.2            | 10.1             |  |
| D*            | 2.90         | 4.3            | 10.4             |  |
| E*            | 5.34         | 8.2            | 19.9             |  |
| F*            | 1.12         | 0.9            | 2.2              |  |
| G*            | 0.61         | 0.4            | 1.3              |  |
| H*            | 0.19         | 0.2            | 0.7              |  |
| I*            | 2.10         | 0.9            | 2.2              |  |
| L*            | 1.54         | 0.9            | 2.2              |  |
| M*            | 1.57         | 0.5            | 1.9              |  |
| N*            | 1.12         | 0.9            | 2.2              |  |
| O*            | 1.12         | 0.9            | 2.2              |  |
| R*            | 1.57         | 0.5            | 1.9              |  |
| S*            | 1.97         | 0.8            | 2.2              |  |
| V*            | 0.61         | 0.2            | 0.7              |  |
| W*            | 0.09         | 0.2            | 0.7              |  |
| X*            | 0.78         | 0.8            | 2.8              |  |
| Y*            | 0.09         | 0.1            | 0.3              |  |
| Z             | 25           | 25             | 35               |  |

| FULL SPECTRUM DETENTION INTERIM POND 1 |             |  |
|--|-------------|--|
| WQ VOLUME                              | 0.245 AC-FT |  |
| EURY VOLUME                            | 0.741 AC-FT |  |
| 100 YR STORAGE VOLUME                  | 1.331 AC-FT |  |
| 100 YR WATER SURFACE EL                | 7083.91     |  |
| SPILLWAY CREST EL                      | 7084.16     |  |
| TOP OF EMBANKMENT EL                   | 7086.00     |  |
| SPILLWAY DESIGN FLOW DEPTH             | 0.84 FT     |  |

| DESIGN POINT SUMMARY |                |                  |                                   |
|----------------------|----------------|------------------|-----------------------------------|
| DESIGN POINT         | Q <sub>s</sub> | Q <sub>100</sub> | STRUCTURE                         |
| 2*                   | 8.0            | 19.3             | (2) EX. 15" AT-GRADE INLETS       |
| 3*                   | 4.2            | 10.1             | EX. 6" SUMP INLET                 |
| 4*                   | 16.1           | 36.7             | D*, E*, F*                        |
| 5*                   | 4.2            | 19.7             | G*, H*, FLOWBY DP4*               |
| 6*                   | 14.1           | 26.7             | I*, J*, K*, L*                    |
| 7                    | 5.7            | 13.8             | PROP. 10" SUMP INLET              |
| 8                    | 4.9            | 11.8             | PROP. 10" SUMP INLET              |
| 9                    | 2.2            | 5.4              | PROP. 5" SUMP INLET               |
| 10                   | 9.4            | 15.6             | PROP. 15" AT-GRADE INLET          |
| 11                   | 1.9            | 15.6             | PROP. 15" AT-GRADE INLET          |
| 12                   | 6.2            | 17.2             | U, FLOWBY DP10                    |
| 13                   | 1.2            | 5.9              | V2, FLOWBY DP11                   |
| 14                   | 19.6           | 52.4             | W3, PR9 CUMULATIVE DETENTION POND |

\* For detailed information on Design Points, Basins, Flowby, or Pipe Runs see Sterling Ranch Filing Nos. 1&2 MDDP prepared by WS Civil Consultants, dated April 2017. Refer to Homestead at Sterling Ranch Filing No. 2 Grading and Erosion Control Plan for additional interim channel stabilization improvements. All elevations provided on map are referenced in NGVD29.

File: 0:\08007A\Sterling Ranch No 2\Map\Eng Exhibit\Prop. Drain. Map Homestead Fil. No 2.dwg Plotstamp: 1/15/2020 11:17 AM

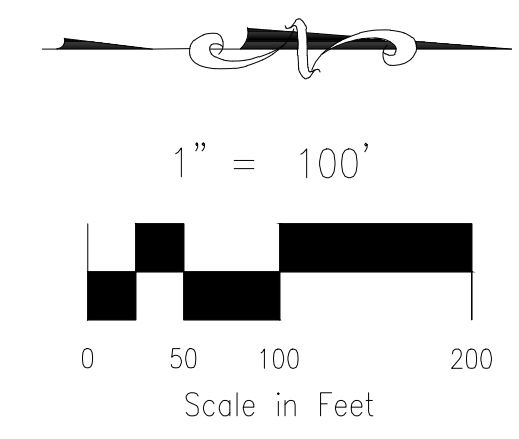

FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES  
FOR BURIED UTILITY INFORMATION  
48 HRS BEFORE YOU DIG  
CALL 1-800-922-1987



20 BOULDER CRESCENT, SUITE 110  
COLORADO SPRINGS, CO 80903  
PHONE: 719.955.5485

HOMESTEAD AT STERLING RANCH FIL. NO. 2  
PROPOSED DRAINAGE MAP

|                    |  |                  |
|--------------------|--|------------------|
| PROJECT NO. 09-007 | SCALE: HORIZONTAL: 1"=100' VERTICAL: N/A | DATE: 01/15/2020 |
| DESIGNED BY: CMN   | CHECKED BY: VAS                          | SHEET 1 OF 1     |
|                    |  | PDM              |



**FINAL DRAINAGE REPORT FOR  
BRANDING IRON AT STERLING RANCH  
FILING NO. 2**

**EL PASO COUNTY, COLORADO**

January 2020

Prepared for:  
**SR Land, LLC**  
**20 Boulder Crescent, Suite 210**  
**Colorado Springs, CO 80903**

Prepared by:



**102 E. Pikes Peak, Suite 500**  
**Colorado Springs, CO 80903**  
**(719) 955-5485**

Project #09-012  
EPC Project # SF-19-018

## EXISTING DRAINAGE CONDITIONS

The Branding Iron at Sterling Ranch Filing No. 2 site consists of 18.881 acres and is situated west of the Sand Creek Watershed. This area was previously studied in the "Sand Creek Drainage Basin Planning Study" (DBPS) prepared by Kiowa Corporation, revised March 1996. More recently the area was studied in the "Master Development Drainage Report for Sterling Ranch Filing Nos. 1&2, and Final Drainage Report for Sterling Ranch Filing No.1" prepared by MS Civil Consultants, dated April 2017 (henceforth referred to as "Sterling Ranch Filing Nos. 1&2 MDDP"). Branding Iron at Sterling Ranch Filing No. 2 and the surrounding areas, with the exception of the existing Barbarick Subdivision, have already been graded during the overlot of the subdivision. Please refer to the Sterling Ranch Filing Nos. 1&2 MDDP by MS Civil Consultants for information on historic conditions and overlot drainage patterns.

## PROPOSED DRAINAGE CHARACTERISTICS

### General Concept Drainage Discussion

The following is a description of the onsite basins, offsite bypass flows and the overall drainage characteristics for the development of Branding Iron at Sterling Ranch Filing No. 2. The development of Branding Iron at Sterling Ranch Filing No. 2 consists of residential streets and cul-de-sacs, proposed storm drainage improvements, and lots located within the filing boundary. The proposed development results in drainage patterns and flow values that are the same or less than those in the Sterling Ranch Filing Nos. 1&2 MDDP. Surface flow is designated as Design Points (DP). The following DPs and Basins were determined using the Rational Method since this method offers a more conservative approach to drainage. It should be noted that all calculations and drainage basins have been revised to reflect the new criteria updates by the El Paso County/City of Colorado Springs Drainage Criteria Manual. For comparison, the **asterisk (\*)** symbol in the detailed drainage discussions below represents each Basin or Design Point as labeled in the Sterling Ranch Filing Nos. 1&2 MDDP.

### Detailed Drainage Discussion (Design Points)

**DP2\***, 5.39 acres, consists of Basin B\* planned residential lots and streets with runoff coefficients of 0.38 for the 5-year and 0.55 for the 100-year. Developed runoff of Q5=8.0 cfs and Q100=19.3 cfs has been calculated for DP2\*. The surface runoff is routed via overlot grading and planned swales to two existing 15' CDOT Type R at-grade inlets. The flows are routed east via a 36" RCP to DP5.

**DP5\***, 0.80 acres, consists of Basin G\* residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year, Basin H\* existing Dines Boulevard, with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year and flowby from Sterling Ranch Filing Nos. 1&2 MDDP DP4\*. Developed runoff of Q5=4.2 and Q100=19.7 cfs has been calculated for DP5\*. The surface runoff is routed via overlot grading and curb and gutter to DP5\* which is collected by an existing 15' CDOT type R at-grade inlet. DP5\* has an intercepted flow of (Q5=4.2 cfs and Q100=14.7 cfs) and of flowby of (Q5=0.0 cfs and Q100=5.0 cfs).

**DP6\***, 4.68 acres, consists of Sterling Ranch Filing Nos. 1&2 MDDP Basins J\* and K\* planned residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year, Sterling Ranch Filing Nos. 1&2 MDDP Basin I\* (Wheatland Drive) and Basin L\* ( Dines Boulevard) with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year. Developed runoff of Q5=14.1 cfs and Q100=26.7cfs has been calculated for DP6\*. The surface runoff is routed via overlot grading and curb and gutter to DP6\* which is collected by an existing 15' CDOT type R at-grade inlet. DP6\* has an intercepted flow of (Q5=12.1 cfs and Q100=17.2 cfs) and of flowby of (Q5=2.0 cfs and Q100=9.5 cfs).



**DP27**, 33.84 acres, consists of Pond 8 an existing full spectrum detention pond. Runoff tributary to Pond 8 consists of Basin UU\* with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year, existing pipe runs PR20\*, PR23\*, PR26\* and proposed pipe run PR2. Developed runoff of Q5=50.0 cfs and Q100=132.0 cfs has been calculated for DP27. A 2.91' X 9' outlet structure is designed to detain and treat all flows reaching DP27. Refer to the Hydraulic Calculations section of the appendix for more information.

**Detailed Drainage Discussion (Drainage Basins)**

**Basins VV and WW**, 1.00 acres, consists of proposed residential backyard lots located along the east and south boundaries of the site, with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year. Developed combined runoff of Q5=0.9 cfs and Q100=3.0 cfs has been calculated for these basins. Sheet flow produced within the residential backyard lots of Basins VV and WW travels east and south via backyard lot grading towards Sand Creek. Since the total area draining into Sand Creek is less than One acre, no permanent water quality facilities are necessary. No deviation to the EPC code is required or requested.

**IMPROVEMENTS TO POND 8**

An additional watershed area of 6.22 acres was added to existing Pond 8 from proposed Basin RR and Basin SS. Runoff produced within these basins is collected at Design Point 24 by a proposed 15' CDOT Type R sump inlet and routed to existing Pond 8 via a proposed 24" and existing 30" RCP pipe (Pipe Run 1). The increased volume and hydraulic affects for Pond 8 were analyzed and are summarized in the table below. Adjustments were performed to the design of Pond 8 to accommodate for the increase in tributary impervious area and runoff volume. Refer to the Hydraulic Calculations section of the appendix for more information. A forebay calculation sheet has been included in the appendix. A copy of the draft CD/pond modifications have been included with this report.

| <b>Description</b>            | <b>MDDP</b> | <b>Branding Iron Fil. No. 2</b> |
|-------------------------------|-------------|---------------------------------|
| Watershed Area                | 28.98 Acres | 35.20 Acres                     |
| 100 yr WSE                    | 7020.59     | 7021.13                         |
| Emergency Spillway Crest EL   | 7020.60     | 7021.15                         |
| 100 yr Volume                 | 2.988 Ac-ft | 3.490 Ac-ft                     |
| North Forebay Volume Required | 643 CF      | 732 CF                          |
| North Forebay Volume Provided | 855 CF      | 855 CF                          |

**EROSION CONTROL**

It is the policy of the El Paso County that a grading and erosion control plan be submitted with the drainage report. EPC approved “Early Grading Plan for Sterling Ranch Phase I Onsite Grading & Erosion Control”, November 18, 2015. And “Early Grading Plan for Sterling Ranch Phase I Offsite Grading & Erosion Control”, December 3, 2015. Grading and Erosion control operations are currently underway (August 2016). Grading and Erosion Control will cease with the final development of the site in the next 12-36 months.

**CHANNEL IMPROVEMENTS**


Slope grading and intermittent channel bank lining has been proposed for portions of the developable areas adjacent to Sand Creek to protect the developed lots and prevent excessive erosion until the DBPS recommended Sand Creek Channel improvements are installed. The proposed slope grading is intended to reduce outer bank grades and bring uniformity to areas where significant riling and destabilization has

# BRANDING IRON AT STERLING RANCH FIL. NO.2

## DETENTION BASIN STAGE-STORAGE TABLE BUILDER

Project: STERLING RANCH FILING NO. 1

Basin ID: POND 8



Example Zone Configuration (Retention Pond)

### Required Volume Calculation

|   |                  |
|---|------------------|
| Selected BMP Type =                     | <b>EDB</b>       |
| Watershed Area =                        | 35.20 acres      |
| Watershed Length =                      | 2,151 ft         |
| Watershed Slope =                       | 0.021 ft/ft      |
| Watershed Imperviousness =              | 53.00% percent   |
| Percentage Hydrologic Soil Group A =    | 0.0% percent     |
| Percentage Hydrologic Soil Group B =    | 100.0% percent   |
| Percentage Hydrologic Soil Groups C/D = | 0.0% percent     |
| Desired WQCV Drain Time =               | 40.0 hours       |
| Location for 1-hr Rainfall Depths =     | User Input       |
| Water Quality Capture Volume (WQCV) =   | 0.630 acre-feet  |
| Excess Urban Runoff Volume (EURV) =     | 2.004 acre-feet  |
| 2-yr Runoff Volume (P1 = 1.19 in.) =    | 1.671 acre-feet  |
| 5-yr Runoff Volume (P1 = 1.5 in.) =     | 2.524 acre-feet  |
| 10-yr Runoff Volume (P1 = 1.75 in.) =   | 3.238 acre-feet  |
| 25-yr Runoff Volume (P1 = 2 in.) =      | 4.235 acre-feet  |
| 50-yr Runoff Volume (P1 = 2.25 in.) =   | 5.066 acre-feet  |
| 100-yr Runoff Volume (P1 = 2.52 in.) =  | 6.013 acre-feet  |
| 500-yr Runoff Volume (P1 = 6.53 in.) =  | 16.565 acre-feet |
| Approximate 2-yr Detention Volume =     | 1.581 acre-feet  |
| Approximate 5-yr Detention Volume =     | 2.320 acre-feet  |
| Approximate 10-yr Detention Volume =    | 2.537 acre-feet  |
| Approximate 25-yr Detention Volume =    | 2.653 acre-feet  |
| Approximate 50-yr Detention Volume =    | 2.952 acre-feet  |
| Approximate 100-yr Detention Volume =   | 3.543 acre-feet  |

Top of MP=7014.54

|   |             |
|---|-------------|
| Optional User Input<br>1-hr Precipitation | 1.19 inches |
|   | 1.50 inches |
|   | 1.75 inches |
|   | 2.00 inches |
|   | 2.25 inches |
|   | 2.52 inches |
|   | 6.53 inches |

### Stage-Storage Calculation


|   |                 |
|---|-----------------|
| Zone 1 Volume (WQCV) =                                  | 0.630 acre-feet |
| Zone 2 Volume (EURV - Zone 1) =                         | 1.374 acre-feet |
| Zone 3 Volume (100-year - Zones 1 & 2) =                | 1.540 acre-feet |
| Total Detention Basin Volume =                          | 3.543 acre-feet |
| Initial Surcharge Volume (ISV) =                        | user ft^3       |
| Initial Surcharge Depth (ISD) =                         | user ft         |
| Total Available Detention Depth (H <sub>total</sub> ) = | user ft         |
| Depth of Trickle Channel (H <sub>trc</sub> ) =          | user ft         |
| Slope of Trickle Channel (S <sub>trc</sub> ) =          | user ft/ft      |
| Slopes of Main Basin Sides (S <sub>main</sub> ) =       | user H:V        |
| Basin Length-to-Width Ratio (R <sub>L,W</sub> ) =       | user            |

| Depth Increment = 1 ft      |            |                              |             |            |            |                              |             |              |                |  |
|-----------------------------|------------|------------------------------|-------------|------------|------------|------------------------------|-------------|--------------|----------------|--|
| Stage - Storage Description | Stage (ft) | Optional Override Stage (ft) | Length (ft) | Width (ft) | Area (ft²) | Optional Override Area (ft²) | Area (acre) | Volume (ft³) | Volume (ac-ft) |  |
| <b>Micropool</b>            | --         | 0.00                         | --          | --         | --         | 10                           | 0.000       |              |                |  |
|                             | --         | 0.33                         | --          | --         | --         | 228                          | 0.005       | 37           | 0.001          |  |
|                             | --         | 0.50                         | --          | --         | --         | 457                          | 0.010       | 93           | 0.002          |  |
| <b>7016</b>                 | --         | 1.50                         | --          | --         | --         | 7,423                        | 0.170       | 3,964        | 0.091          |  |
| <b>7017</b>                 | --         | 2.50                         | --          | --         | --         | 20,206                       | 0.464       | 17,852       | 0.410          |  |
| <b>7018</b>                 | --         | 3.50                         | --          | --         | --         | 28,371                       | 0.651       | 42,140       | 0.967          |  |
| <b>7019</b>                 | --         | 4.50                         | --          | --         | --         | 33,351                       | 0.766       | 73,001       | 1.676          |  |
| <b>7020</b>                 | --         | 5.50                         | --          | --         | --         | 37,998                       | 0.872       | 108,676      | 2.495          |  |
| <b>7021</b>                 | --         | 6.50                         | --          | --         | --         | 41,980                       | 0.964       | 148,665      | 3.413          |  |
| <b>7022</b>                 | --         | 7.50                         | --          | --         | --         | 46,012                       | 1.056       | 192,661      | 4.423          |  |
| <b>7023</b>                 | --         | 8.50                         | --          | --         | --         | 50,147                       | 1.151       | 240,740      | 5.527          |  |
| <b>7024</b>                 | --         | 9.50                         | --          | --         | --         | 54,386                       | 1.249       | 293,007      | 6.727          |  |
| <b>7025</b>                 | --         | 10.50                        | --          | --         | --         | 58,728                       | 1.348       | 349,564      | 8.025          |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |
|                             | --         | --                           | --          | --         | --         |                              |             |              |                |  |

# BRANDING IRON AT STERLING RANCH FIL. NO.2

## Detention Basin Outlet Structure Design

Project: STERLING RANCH FILING NO. 1  
Basin ID: POND 8



|                   | Stage (ft) | Zone Volume (ac-ft) | Outlet Type          |
|-------------------|------------|---------------------|----------------------|
| Zone 1 (WQCV)     | 2.94       | 0.630               | Orifice Plate        |
| Zone 2 (EURV)     | 4.92       | 1.374               | Orifice Plate        |
| Zone 3 (100-year) | 6.64       | 1.540               | Weir&Pipe (Restrict) |
| <b>Total</b>      |            | <b>3.543</b>        |                      |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =  ft (distance below the filtration media surface)  
Underdrain Orifice Diameter =  inches

Calculated Parameters for Underdrain

Underdrain Orifice Area =  ft<sup>2</sup>  
Underdrain Orifice Centroid =  feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =  ft (relative to basin bottom at Stage = 0 ft)  
Depth at top of Zone using Orifice Plate =  ft (relative to basin bottom at Stage = 0 ft)  
Orifice Plate: Orifice Vertical Spacing =  inches  
Orifice Plate: Orifice Area per Row =  inches

Calculated Parameters for Plate

WQ Orifice Area per Row =  ft<sup>2</sup>  
Elliptical Half-Width =  feet  
Elliptical Slot Centroid =  feet  
Elliptical Slot Area =  ft<sup>2</sup>

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.60             | 3.20             | 4.80             |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 2.87             | 2.90             | 4.38             | 2.88             |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

User Input: Vertical Orifice (Circular or Rectangular)

|   | Not Selected                     | Not Selected                     |   |
|---|----------------------------------|----------------------------------|---|
| Invert of Vertical Orifice =                  | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | inches  |

Calculated Parameters for Vertical Orifice

|                             | Not Selected                     | Not Selected                     |                 |
|-----------------------------|----------------------------------|----------------------------------|-----------------|
| Vertical Orifice Area =     | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | ft <sup>2</sup> |
| Vertical Orifice Centroid = | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | feet            |

User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)

|                                       | Zone 3 Weir                       | Not Selected                     |   |
|---------------------------------------|-----------------------------------|----------------------------------|---|
| Overflow Weir Front Edge Height, Ho = | <input type="text" value="4.74"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | <input type="text" value="9.00"/> | <input type="text" value="N/A"/> | feet  |
| Overflow Weir Slope =                 | <input type="text" value="4.00"/> | <input type="text" value="N/A"/> | H:V (enter zero for flat grate)               |
| Horiz. Length of Weir Sides =         | <input type="text" value="2.91"/> | <input type="text" value="N/A"/> | feet  |
| Overflow Grate Open Area % =          | <input type="text" value="70%"/>  | <input type="text" value="N/A"/> | % grate open area/total area                  |
| Debris Clogging % =                   | <input type="text" value="50%"/>  | <input type="text" value="N/A"/> | %   |

Calculated Parameters for Overflow Weir

|  | Zone 3 Weir                        | Not Selected                     |                 |
|--|------------------------------------|----------------------------------|-----------------|
| Height of Grate Upper Edge, H <sub>1</sub> = | <input type="text" value="5.47"/>  | <input type="text" value="N/A"/> | feet            |
| Over Flow Weir Slope Length =                | <input type="text" value="3.00"/>  | <input type="text" value="N/A"/> | feet            |
| Grate Open Area / 100-yr Orifice Area =      | <input type="text" value="4.90"/>  | <input type="text" value="N/A"/> | should be ≥ 4   |
| Overflow Grate Open Area w/o Debris =        | <input type="text" value="18.90"/> | <input type="text" value="N/A"/> | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | <input type="text" value="9.45"/>  | <input type="text" value="N/A"/> | ft <sup>2</sup> |

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

|   | Zone 3 Restrictor                  | Not Selected                     |  |
|---|------------------------------------|----------------------------------|--|
| Depth to Invert of Outlet Pipe =            | <input type="text" value="0.00"/>  | <input type="text" value="N/A"/> | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | <input type="text" value="30.00"/> | <input type="text" value="N/A"/> | inches   |
| Restrictor Plate Height Above Pipe Invert = | <input type="text" value="22.00"/> | <input type="text" value="N/A"/> | inches   |

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

|  | Zone 3 Restrictor                 | Not Selected                     |                 |
|--|-----------------------------------|----------------------------------|-----------------|
| Outlet Orifice Area =                            | <input type="text" value="3.86"/> | <input type="text" value="N/A"/> | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | <input type="text" value="1.02"/> | <input type="text" value="N/A"/> | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | <input type="text" value="2.06"/> | <input type="text" value="N/A"/> | radians         |

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage =  ft (relative to basin bottom at Stage = 0 ft)  
Spillway Crest Length =  feet  
Spillway End Slopes =  H:V  
Freeboard above Max Water Surface =  feet




Calculated Parameters for Spillway

Spillway Design Flow Depth =  feet  
Stage at Top of Freeboard =  feet  
Basin Area at Top of Freeboard =  acres

### Routed Hydrograph Results

|   | WQCV  | EURV             | 2 Year | 5 Year           | 10 Year          | 25 Year          | 50 Year          | 100 Year       | 500 Year |
|---|-------|------------------|--------|------------------|------------------|------------------|------------------|----------------|----------|
| Design Storm Return Period =                  |       |                  |        |                  |                  |                  |                  |                |          |
| One-Hour Rainfall Depth (in) =                | 0.53  | 1.07             | 1.19   | 1.50             | 1.75             | 2.00             | 2.25             | 2.52           | 6.53     |
| Calculated Runoff Volume (acre-ft) =          | 0.630 | 2.004            | 1.671  | 2.524            | 3.238            | 4.235            | 5.066            | 6.013          | 16.565   |
| OPTIONAL Override Runoff Volume (acre-ft) =   |       |                  |        |                  |                  |                  |                  |                |          |
| Inflow Hydrograph Volume (acre-ft) =          | 0.629 | 2.003            | 1.670  | 2.523            | 3.237            | 4.233            | 5.062            | 6.008          | 16.555   |
| Predevelopment Unit Peak Flow, q (cfs/acre) = | 0.00  | 0.00             | 0.01   | 0.17             | 0.34             | 0.78             | 1.01             | 1.29           | 1.83     |
| Predevelopment Peak Q (cfs) =                 | 0.0   | 0.0              | 0.4    | 6.0              | 12.0             | 27.5             | 35.6             | 45.6           | 64.5     |
| Peak Inflow Q (cfs) =                         | 12.5  | 39.7             | 33.2   | 50.2             | 64.6             | 84.7             | 101.4            | 120.4          | 329.9    |
| Peak Outflow Q (cfs) =                        | 0.3   | 0.8              | 0.5    | 5.0              | 13.4             | 26.3             | 37.8             | 43.8           | 274.9    |
| Ratio Peak Outflow to Predevelopment Q =      | N/A   | N/A              | N/A    | 0.8              | 1.1              | 1.0              | 1.1              | 1.0            | 4.3      |
| Structure Controlling Flow =                  | Plate | Overflow Grate 1 | Plate  | Overflow Grate 1 | Overflow Grate 1 | Overflow Grate 1 | Overflow Grate 1 | Outlet Plate 1 | Spillway |
| Max Velocity through Grate 1 (fps) =          | N/A   | 0.01             | N/A    | 0.2              | 0.7              | 1.3              | 1.9              | 2.3            | 2.6      |
| Max Velocity through Grate 2 (fps) =          | N/A   | N/A              | N/A    | N/A              | N/A              | N/A              | N/A              | N/A            | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =  | 39    | 72               | 66     | 72               | 70               | 67               | 65               | 63             | 47       |
| Time to Drain 99% of Inflow Volume (hours) =  | 41    | 77               | 70     | 77               | 77               | 76               | 75               | 74             | 65       |
| Maximum Ponding Depth (ft) =                  | 2.85  | 4.80             | 4.39   | 5.14             | 5.51             | 5.90             | 6.19             | 6.59           | 8.17     |
| Area at Maximum Ponding Depth (acres) =       | 0.53  | 0.80             | 0.75   | 0.83             | 0.87             | 0.91             | 0.94             | 0.97           | 1.12     |
| Maximum Volume Stored (acre-ft) =             | 0.584 | 1.902            | 1.585  | 2.179            | 2.495            | 2.851            | 3.119            | 3.490          | 5.152    |

## Detention Basin Outlet Structure Design

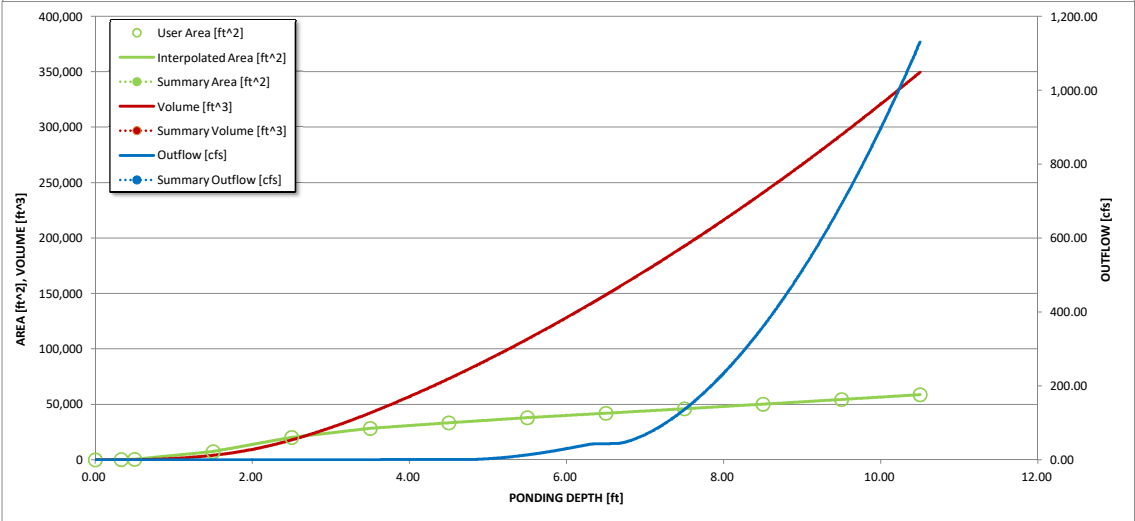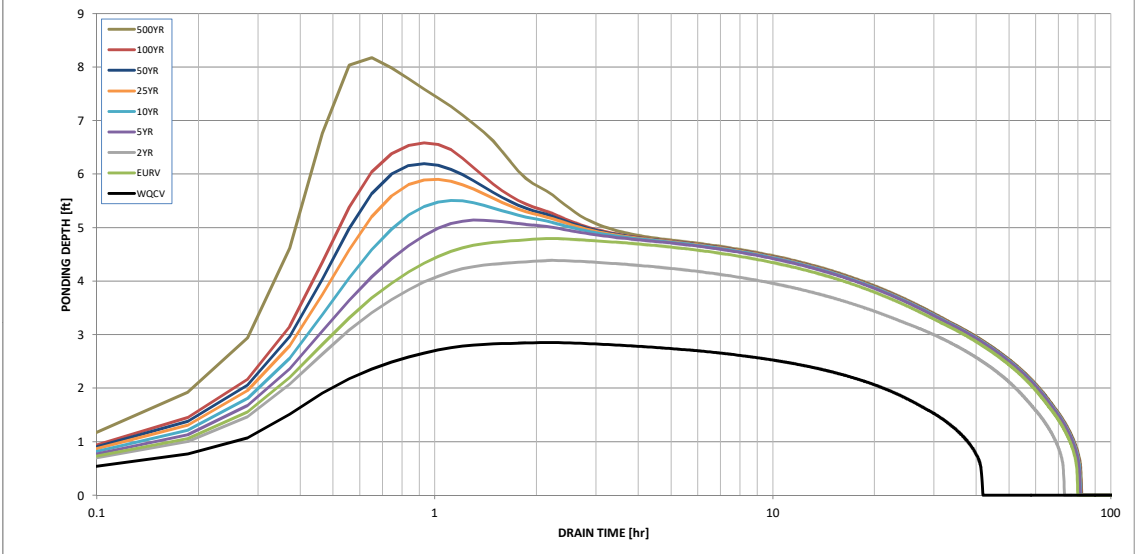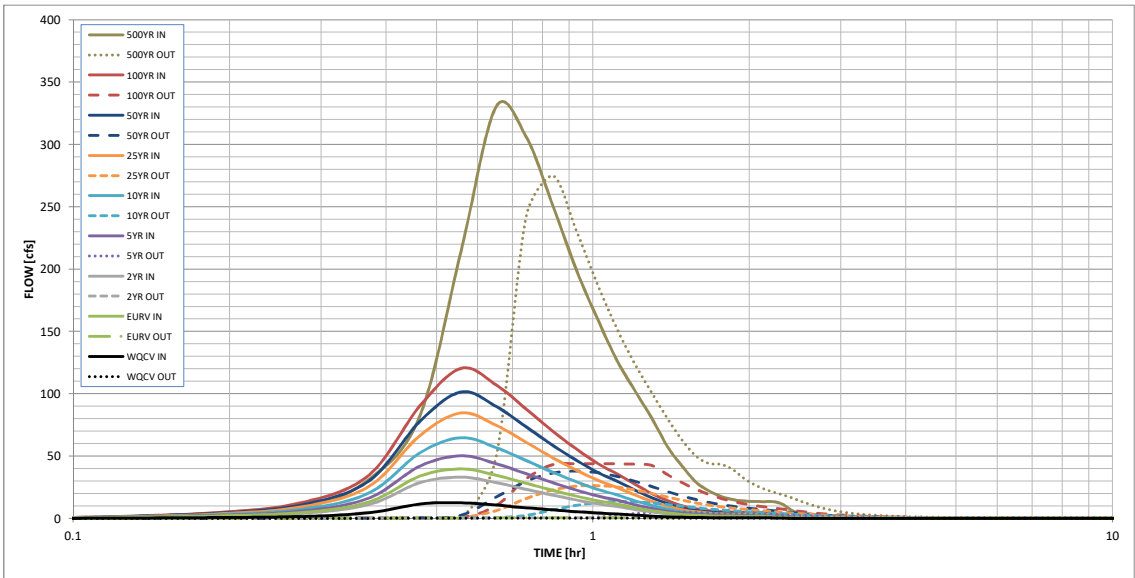

**S-A-V-D Chart Axis Override**

|               | X-axis | Left Y-Axis | Right Y-Axis |
|---------------|--------|-------------|--------------|
| minimum bound |        |             |              |
| maximum bound |        |             |              |



# BRANDING IRON AT STERLING RANCH FILING NO. 2

## COUNTY OF EL PASO, STATE OF COLORADO

### PROPOSED DRAINAGE MAP

JANUARY 2020

**LEGEND**

**FUT. CHECK**

— (6920) — EXISTING CONTOUR  
 — 6920 — PROP CONTOUR

— BRANDING IRON FILING NO. 2 BOUNDARY

— PROPOSED STORM SEWER PIPE  
 — EXISTING STORM SEWER PIPE

— 100 YEAR FLOODPLAIN  
 (FEMA) BASE FLOOD ELEVATION  
 (FEMA) CROSS SECTION

**BASIN DESIGNATION**

ACRES

PIPE RUN REFERENCE LABEL

SURFACE DESIGN POINT

CROSSSPAN

INLET

EXISTING FLOW DIRECTION ARROW

EXISTING FLOW DIRECTION ARROW


PROPOSED FLOW DIRECTION ARROW

FLARED END SECTION

HIP HIGH POINT

LP LOW POINT

EXISTING WETLANDS

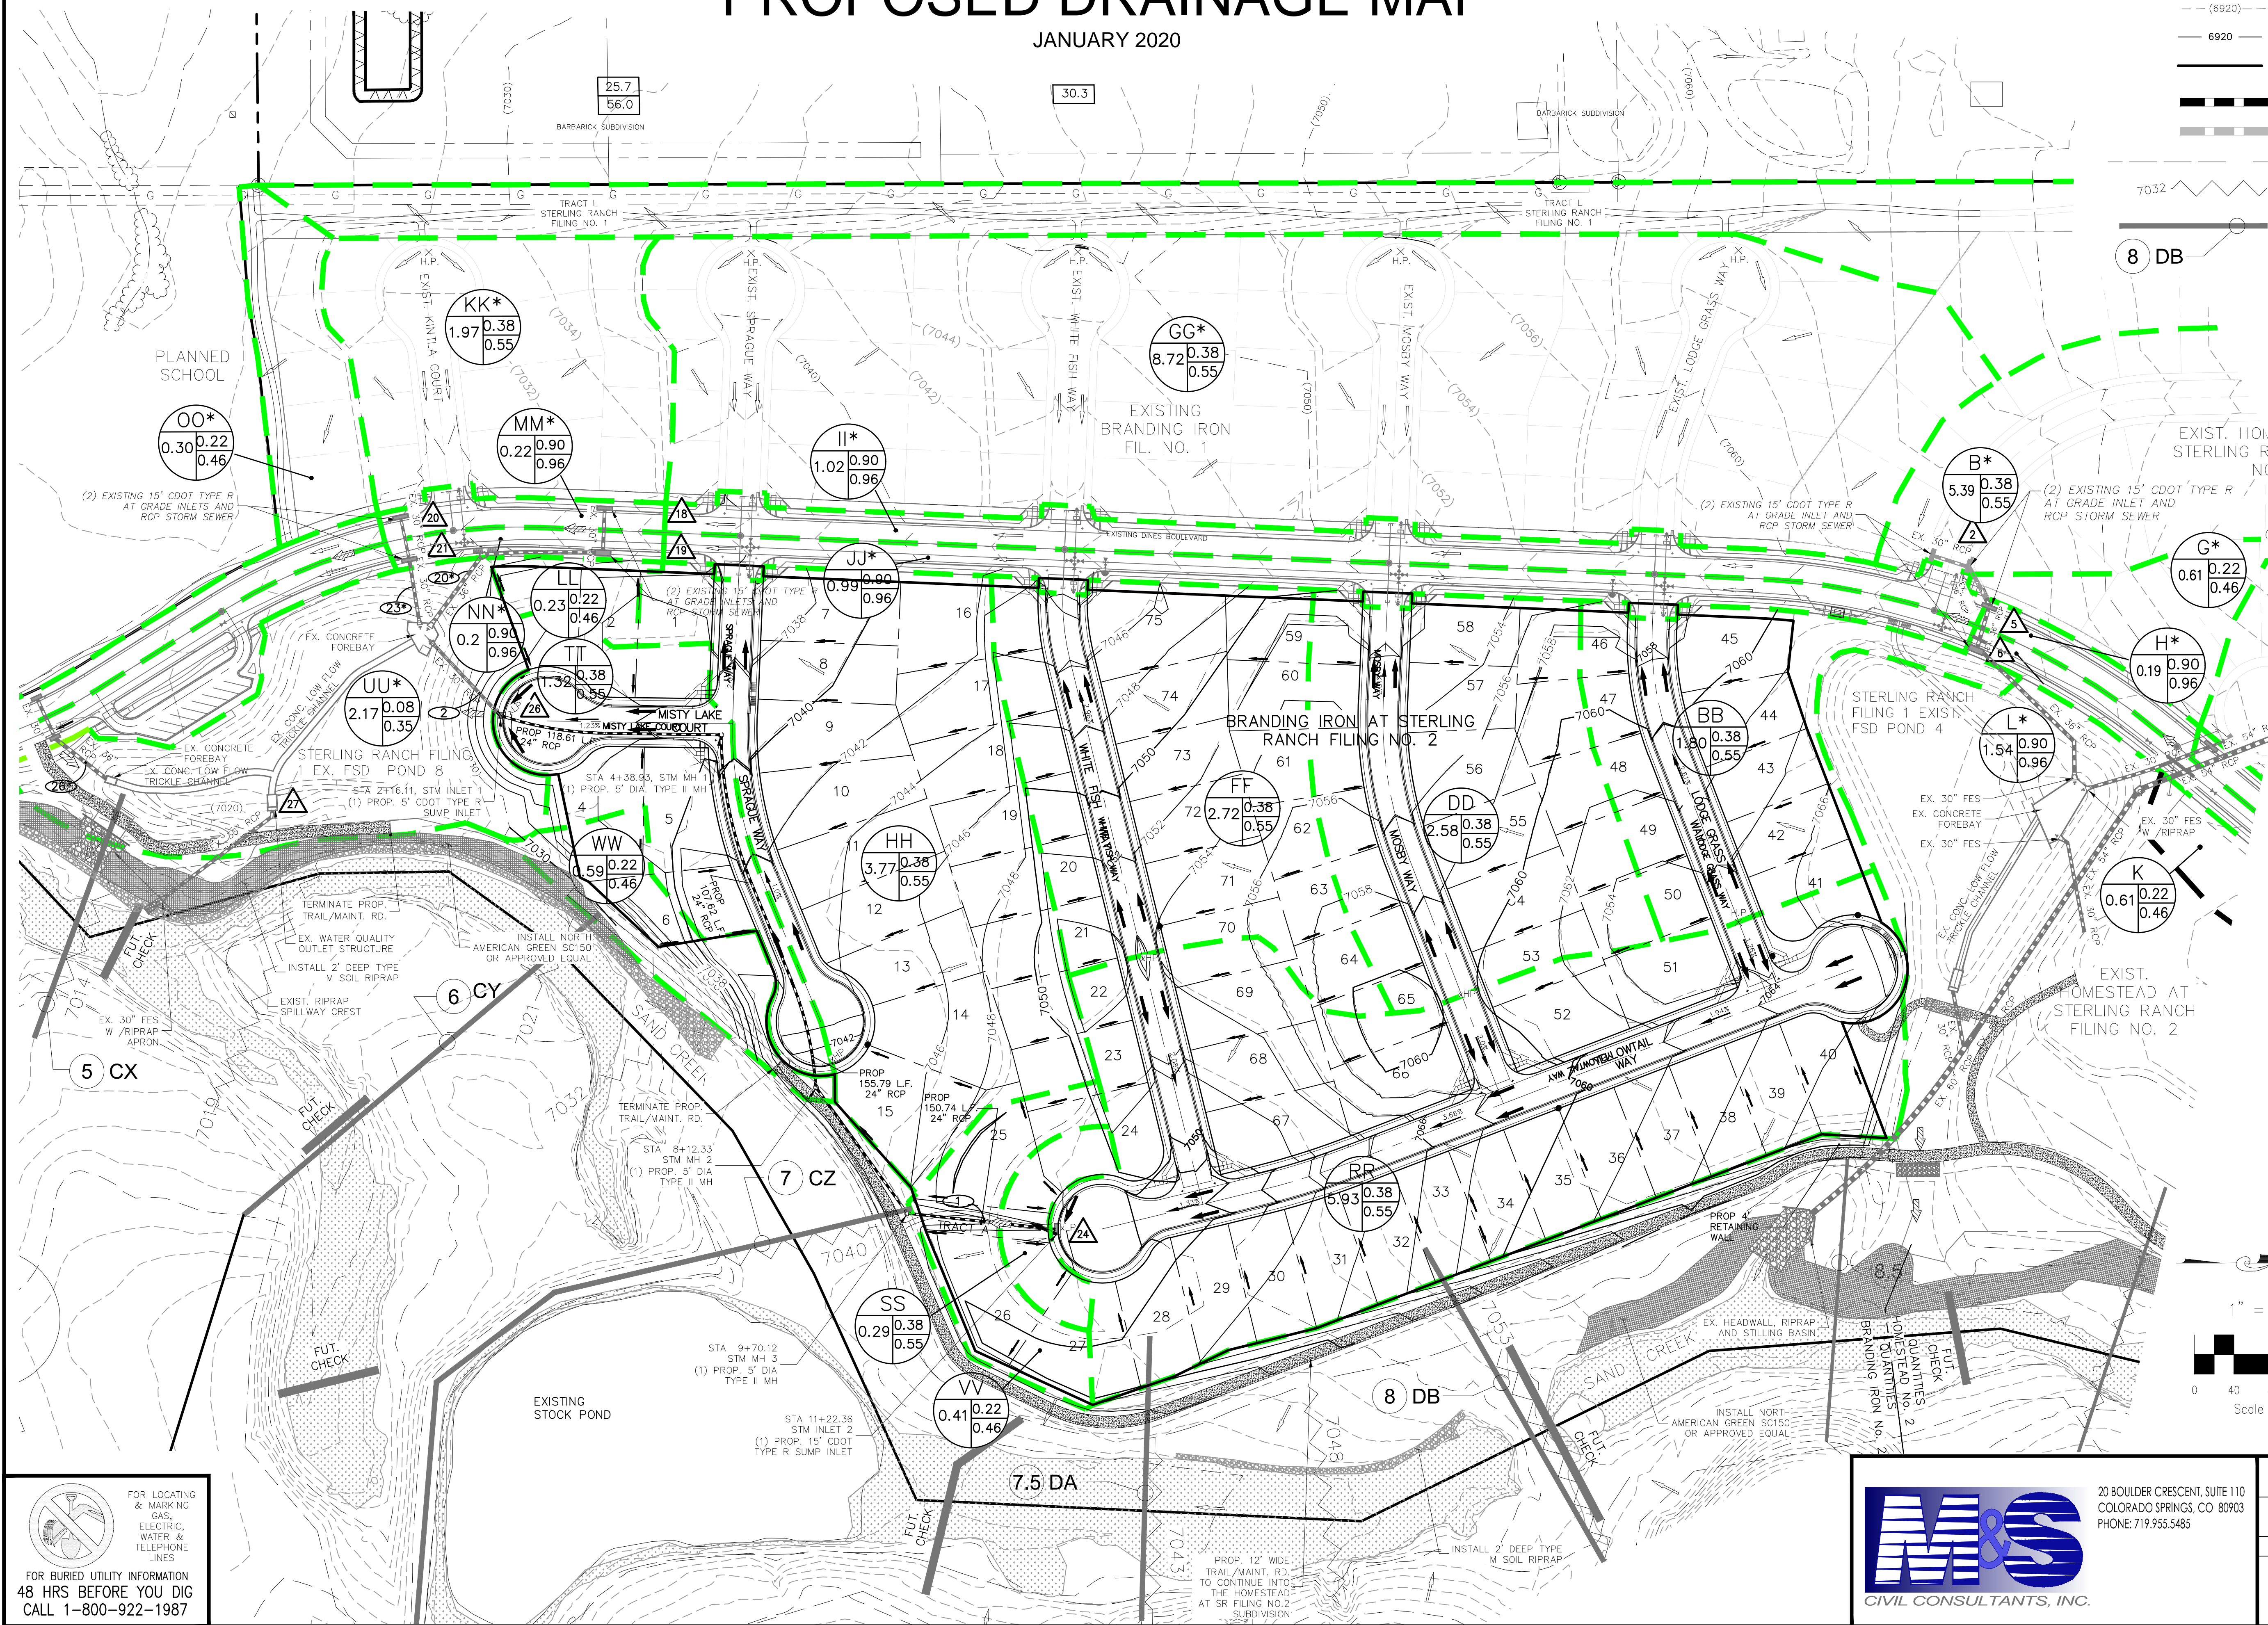

**BASIN SUMMARY**

| BASIN          | AREA (ACRES) | Q <sub>5</sub> | Q <sub>100</sub> |
|----------------|--------------|----------------|------------------|
| ONSITE BASINS  |              |                |                  |
| BB             | 1.80         | 2.6            | 6.4              |
| DD             | 2.58         | 3.7            | 9.0              |
| FF             | 2.72         | 3.9            | 9.6              |
| HH             | 3.77         | 5.3            | 12.9             |
| LL             | 0.23         | 0.2            | 0.7              |
| RR             | 5.93         | 7.9            | 19.2             |
| SS             | 0.29         | 0.1            | 0.9              |
| TT             | 1.32         | 2.0            | 4.9              |
| VV             | 0.41         | 0.4            | 1.3              |
| WW             | 0.59         | 0.5            | 1.8              |
| OFFSITE BASINS |              |                |                  |
| B*             | 5.39         | 8.0            | 19.3             |
| G*             | 0.61         | 0.5            | 1.9              |
| H*             | 0.19         | 0.9            | 1.6              |
| K*             | 0.61         | 0.5            | 1.9              |
| L*             | 1.54         | 5.6            | 10.0             |
| GG*            | 8.72         | 11.3           | 27.3             |
| II*            | 1.02         | 4.0            | 7.2              |
| JJ*            | 0.99         | 3.9            | 7.0              |
| KK*            | 1.97         | 2.9            | 7.1              |
| MM*            | 0.22         | 1.0            | 1.8              |
| NN*            | 0.20         | 0.9            | 1.7              |
| OO*            | 0.30         | 0.3            | 1.0              |
| PP*            | 0.37         | 1.7            | 3.1              |
| UU*            | 2.17         | 0.8            | 5.8              |


**DESIGN POINT SUMMARY**

| DESIGN POINT | Q <sub>5</sub> | Q <sub>100</sub> | BASIN                            | STRUCTURE                  |
|--------------|----------------|------------------|----------------------------------|----------------------------|
| 2*           | 8.0            | 19.3             | B*                               | (2) EX. 15" AT-GRADE INLET |
| 5*           | 4.2            | 19.7             | G*, H*, FLOWBY DP4*              | EX. 15" AT-GRADE INLET     |
| 6*           | 14.1           | 26.7             | I*, J*, K*, L*                   | EX. 15" AT-GRADE INLET     |
| 18*          | 14.1           | 41.6             | GG*, II*, FLOWBY DP5*            | EX. 15" AT-GRADE INLET     |
| 19           | 20.5           | 52.0             | BB, DD, FF, HH, JJ*, FLOWBY DP6* | EX. 15" AT-GRADE INLET     |
| 20*          | 5.2            | 27.9             | KK*, MM*, FLOWBY DP18*           | EX. 15" AT-GRADE INLET     |
| 21           | 6.4            | 30.7             | LL, NN*, FLOWBY DP19*            | EX. 15" AT-GRADE INLET     |
| 24           | 8.0            | 19.8             | RR, SS                           | PROP. 15" SUMP INLET       |
| 26           | 2.0            | 4.9              | TT                               | PROP. 5" SUMP INLET        |
| 27           | 50.0           | 132.0            | UU*, PR2, PR20*, PR23*, PR26*    | CUMULATIVE DET. POND 8     |

\* For detailed information on Design Points, Basins, Flowby, or Pipe Runs see Sterling Ranch Filing Nos. 1&2 MDDP prepared by MS Civil Consultants, dated April 2017

**STORM SEWER SUMMARY**

| PIPE RUN | Q <sub>5</sub> | Q <sub>100</sub> | PIPE SIZE | CONTRIBUTING PIPES/DESIGN POINTS |
|----------|----------------|------------------|-----------|----------------------------------|
| 1        | 8.0            | 19.8             | 24" RCP   | DP24                             |
| 2        | 9.5            | 23.5             | 24" RCP   | DP26, PR1                        |
| 20*      | 25.8           | 42.3             | 36" RCP   | SEE MDDP*                        |
| 23*      | 11.1           | 34.4             | 30" RCP   | SEE MDDP*                        |
| 26*      | 3.2            | 27.7             | 36" RCP   | SEE MDDP*                        |

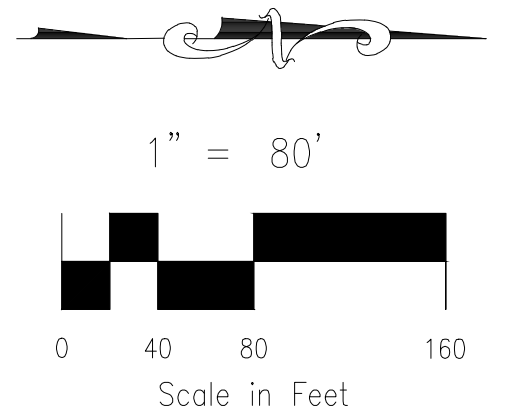

File: 0100012A\Challenger East\Map\Branding Iron Fil No 2.dwg Plotstamp: 3/24/2020 4:27 PM

FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES

FOR BURIED UTILITY INFORMATION 48 HRS BEFORE YOU DIG CALL 1-800-922-1987

**M&S CIVIL CONSULTANTS, INC.**

20 BOULDER CRESCENT, SUITE 110  
 COLORADO SPRINGS, CO 80903  
 PHONE: 719.955.5485

BRANDING IRON AT SR FIL. NO. 2

PROPOSED DRAINAGE MAP

PROJECT NO. 09-012 SCALE: HORIZONTAL: 1"=80' DATE: 01/27/2020

DESIGNED BY: CMN DRAWN BY: CMN CHECKED BY: VAS SHEET 1 OF 1 PDM



**STERLING RANCH  
RETENTION POND VOLUME**

***(Pond Volume Calculation)***

**BIG POND**

| Elevation | SF         | CF         | Storage |       |
|-----------|------------|------------|---------|-------|
|           |            |            | AF      | Sum   |
| 7028      | 0.00       | -          |         | 0     |
| 7030      | 53,785.00  | 53,785.00  | 1.23    | 1.23  |
| 7032      | 70,507.00  | 124,292.00 | 2.85    | 4.09  |
| 7034      | 87,672.00  | 158,179.00 | 3.63    | 7.72  |
| 7036      | 109,612.00 | 197,284.00 | 4.53    | 12.25 |


Total = 533,540 CF  
Total = 12.25 Ac-ft

At Elevation 7035, the Storage is 9.98 Ac-ft.  
At Elevation 7034, the Storage is 7.72 Ac-ft.

Calculated by: VAS  
Date: 4/21/2016  
Checked by: VAS

# STERLING RANCH

"BIG POND"

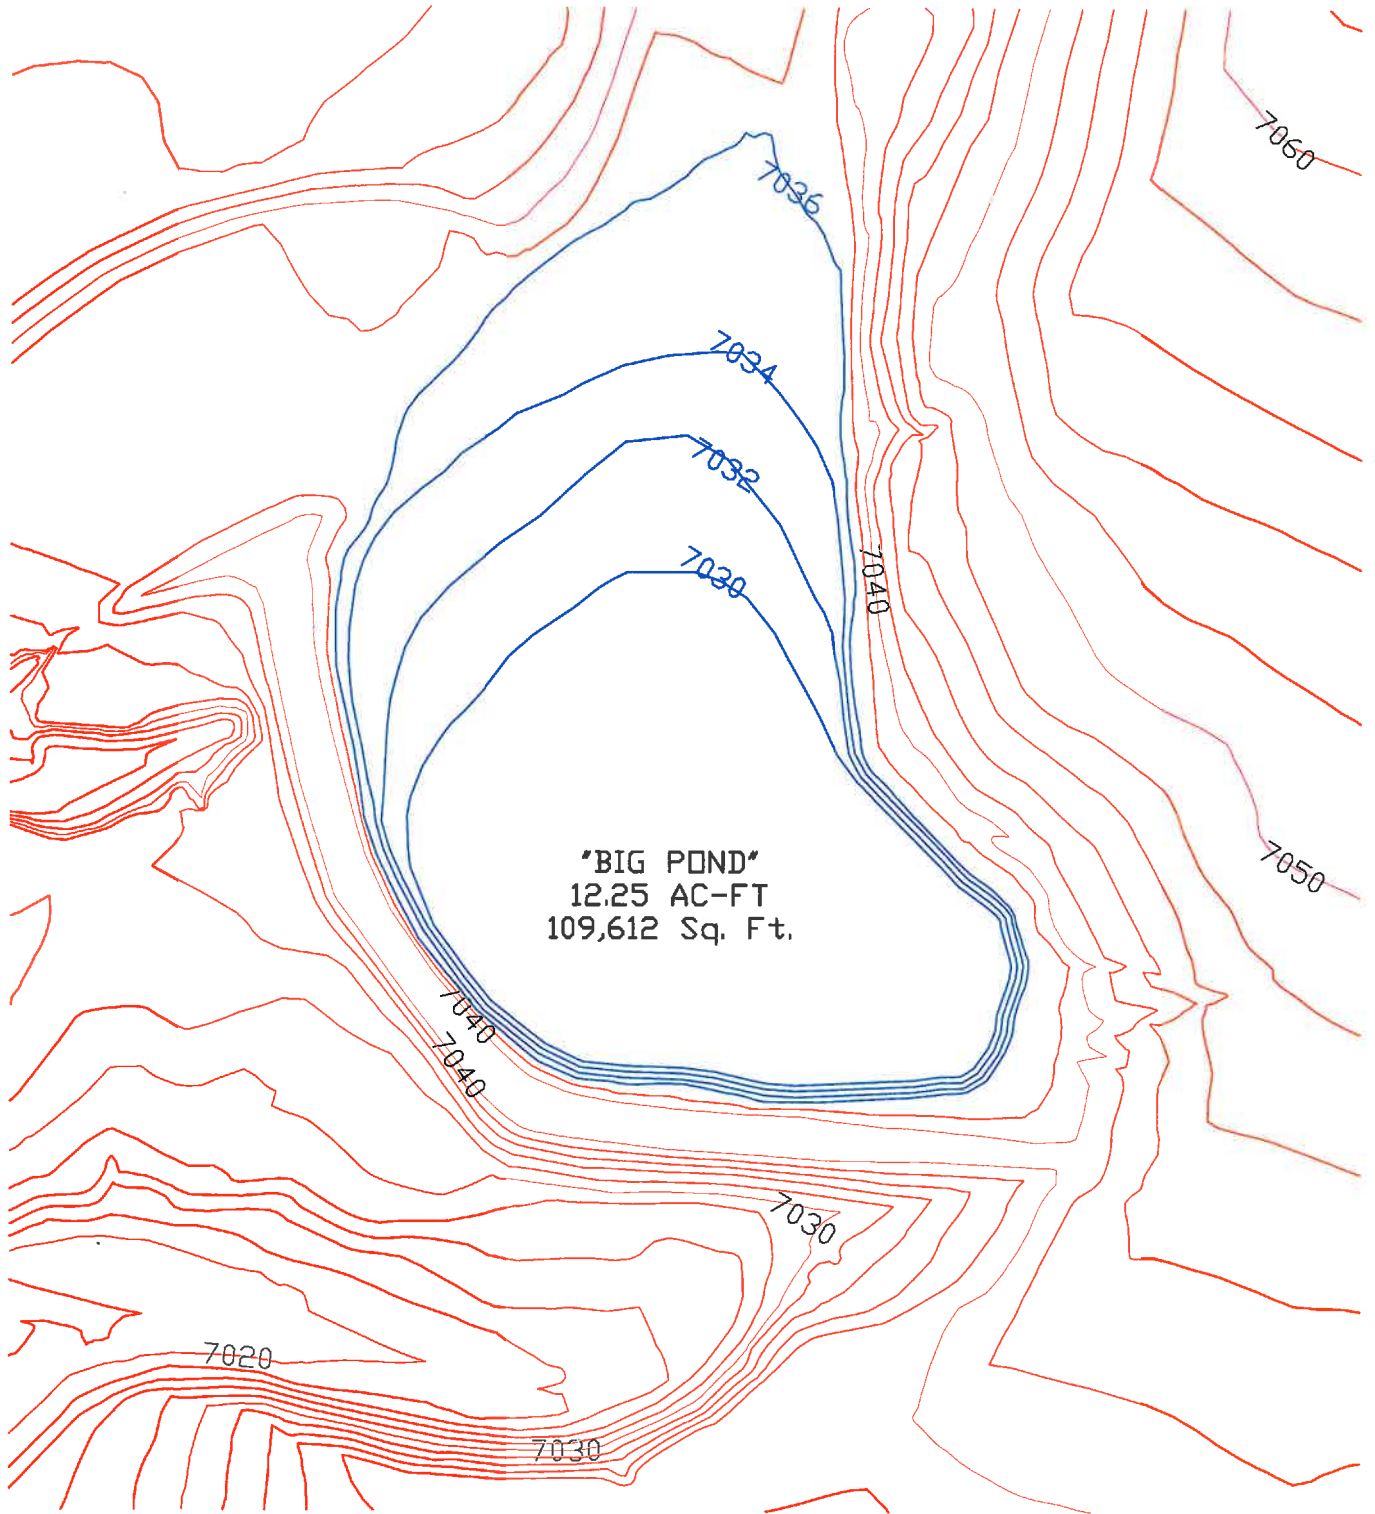

"BIG POND"  
12.25 AC-FT  
109,612 Sq. Ft.



20 BOULDER CRESCENT, STE. 110  
COLORADO SPRINGS,  
COLORADO 80903

EXHIBIT  
STERLING RANCH  
JOB NO. 09-001  
DATE PREPARED: 4-25-16  
DATE REVISED:

CIVIL CONSULTANTS, INC.

v 719.955.5485  
f 719.444.8427

SHEET 1 OF 1



INNOVATIVE DESIGN. **CLASSIC RESULTS.**

**FINAL DRAINAGE REPORT  
FOR  
RETREAT AT TIMBERRIDGE  
FILING NO. 1**

Prepared for:  
**TIMBERRIDGE DEVELOPMENT GROUP, LLC**  
2138 FLYING HORSE CLUB DRIVE  
COLORADO SPRINGS CO 80921  
(719) 592-9333

Prepared by:  
**CLASSIC CONSULTING**  
619 N. CASCADE AVE SUITE 200  
COLORADO SPRINGS CO 80903  
(719) 785-0790

Job No. 1185.00

PCD Project No. SF-19-009








**DETENTION BASIN STAGE-STORAGE TABLE BUILDER**

UD-Detention, Version 3.07 (February 2017)

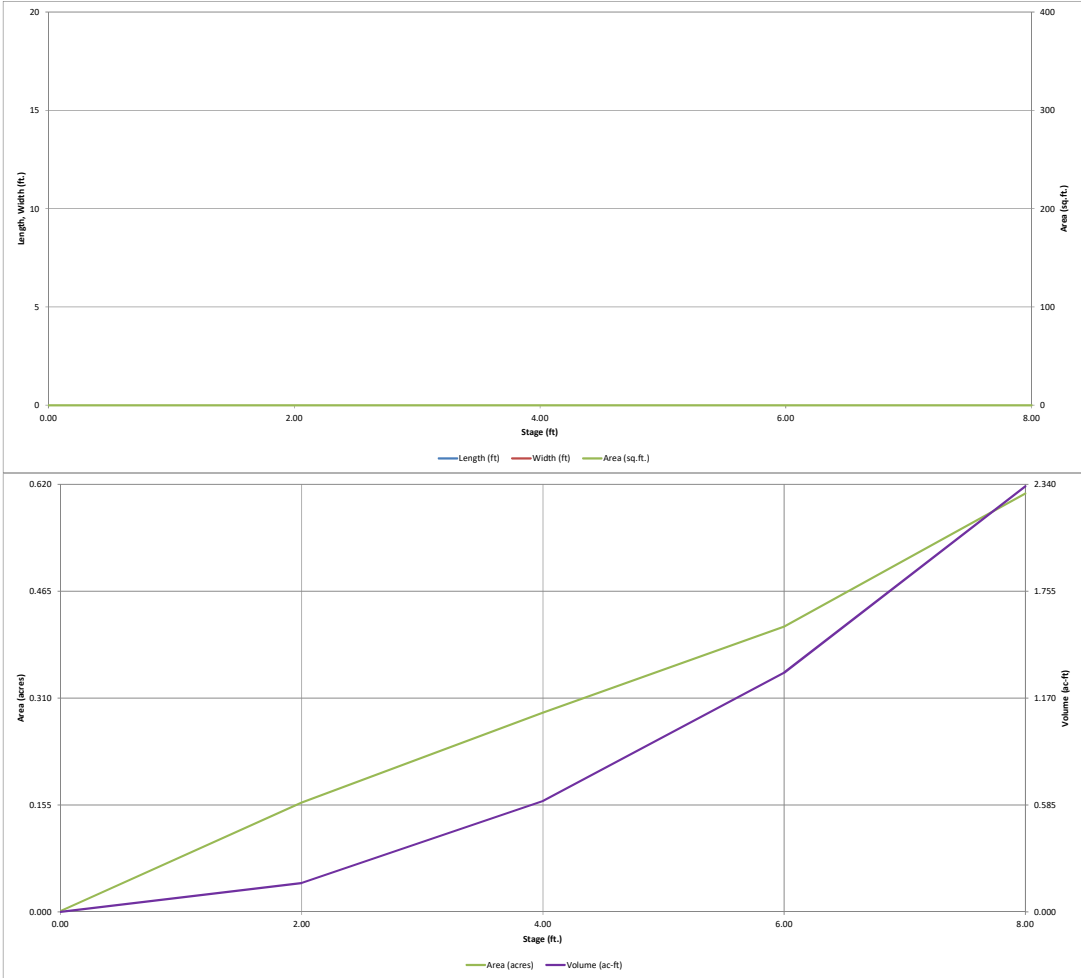


# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: **RETREAT AT TIMBERRIDGE FILING NO. 1**

Basin ID: **POND 1**

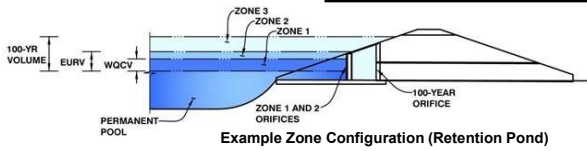

**Example Zone Configuration (Retention Pond)**

|                   | Stage (ft) | Zone Volume (ac-ft) | Outlet Type          |
|-------------------|------------|---------------------|----------------------|
| Zone 1 (WQCV)     | 2.33       | 0.214               | Orifice Plate        |
| Zone 2 (EURV)     | 3.18       | 0.177               | Orifice Plate        |
| Zone 3 (100-year) | 5.91       | 0.877               | Weir&Pipe (Restrict) |
|                   |            | 1.268               | Total                |

**User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)**

|                                   |     |  |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter =     | N/A | inches   |

**Calculated Parameters for Underdrain**

|                               |     |                 |
|-------------------------------|-----|-----------------|
| Underdrain Orifice Area =     | N/A | ft <sup>2</sup> |
| Underdrain Orifice Centroid = | N/A | feet            |

**User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)**

|  |       |   |
|--|-------|---|
| Invert of Lowest Orifice =                 | 0.00  | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 3.50  | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing =  | 14.00 | inches  |
| Orifice Plate: Orifice Area per Row =      | N/A   | inches  |

**Calculated Parameters for Plate**

|                            |     |                 |
|----------------------------|-----|-----------------|
| WQ Orifice Area per Row =  | N/A | ft <sup>2</sup> |
| Elliptical Half-Width =    | N/A | feet            |
| Elliptical Slot Centroid = | N/A | feet            |
| Elliptical Slot Area =     | N/A | ft <sup>2</sup> |

**User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)**

|                                | Row 1 (required) | Row 2 (optional)  | Row 3 (optional)  | Row 4 (optional)  | Row 5 (optional)  | Row 6 (optional)  | Row 7 (optional)  | Row 8 (optional)  |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.20              | 2.40              |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      | 1.20             | 1.31              | 1.31              |                   |                   |                   |                   |                   |
|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

**User Input: Vertical Orifice (Circular or Rectangular)**

|   | Not Selected | Not Selected |   |
|---|--------------|--------------|---|
| Invert of Vertical Orifice =                  | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | N/A          | N/A          | inches  |

**Calculated Parameters for Vertical Orifice**

|                             | Not Selected | Not Selected |                 |
|-----------------------------|--------------|--------------|-----------------|
| Vertical Orifice Area =     | N/A          | N/A          | ft <sup>2</sup> |
| Vertical Orifice Centroid = | N/A          | N/A          | feet            |

**User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)**

|                                       | Zone 3 Weir | Not Selected |   |
|---------------------------------------|-------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 3.50        | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 4.00        | N/A          | feet  |
| Overflow Weir Slope =                 | 4.00        | N/A          | H:V (enter zero for flat grate)               |
| Horiz. Length of Weir Sides =         | 4.00        | N/A          | feet  |
| Overflow Grate Open Area % =          | 75%         | N/A          | %, grate open area/total area                 |
| Debris Clogging % =                   | 50%         | N/A          | %   |

**Calculated Parameters for Overflow Weir**

|  | Zone 3 Weir | Not Selected |                 |
|--|-------------|--------------|-----------------|
| Height of Grate Upper Edge, H <sub>g</sub> = | 4.50        | N/A          | feet            |
| Overflow Weir Slope Length =                 | 4.12        | N/A          | feet            |
| Grate Open Area / 100-yr Orifice Area =      | 7.00        | N/A          | should be ≥ 4   |
| Overflow Grate Open Area w/o Debris =        | 12.37       | N/A          | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | 6.18        | N/A          | ft <sup>2</sup> |

**User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)**

|   | Zone 3 Restrictor | Not Selected |  |
|---|-------------------|--------------|--|
| Depth to Invert of Outlet Pipe =            | 2.50              | N/A          | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 18.00             | N/A          | inches   |
| Restrictor Plate Height Above Pipe Invert = | 18.00             |              | inches   |

**Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate**

|  | Zone 3 Restrictor | Not Selected |                 |
|--|-------------------|--------------|-----------------|
| Outlet Orifice Area =                            | 1.77              | N/A          | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | 0.75              | N/A          | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | 3.14              | N/A          | radians         |

**User Input: Emergency Spillway (Rectangular or Trapezoidal)**

|                                     |       |   |
|-------------------------------------|-------|---|
| Spillway Invert Stage =             | 6.30  | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length =             | 30.00 | feet  |
| Spillway End Slopes =               | 3.00  | H:V   |
| Freeboard above Max Water Surface = | 1.00  | feet  |

**Calculated Parameters for Spillway**




|                                  |      |       |
|----------------------------------|------|-------|
| Spillway Design Flow Depth =     | 0.62 | feet  |
| Stage at Top of Freeboard =      | 7.92 | feet  |
| Basin Area at Top of Freeboard = | 0.60 | acres |

**Routed Hydrograph Results**

|   | WQCV  | EURV  | 2 Year | 5 Year | 10 Year         | 25 Year         | 50 Year        | 100 Year       | 500 Year |
|---|-------|-------|--------|--------|-----------------|-----------------|----------------|----------------|----------|
| Design Storm Return Period =                  |       |       |        |        |                 |                 |                |                |          |
| One-Hour Rainfall Depth (in) =                | 0.53  | 1.07  | 1.19   | 1.50   | 1.75            | 2.00            | 2.25           | 2.52           | 3.85     |
| Calculated Runoff Volume (acre-ft) =          | 0.214 | 0.391 | 0.278  | 0.421  | 0.832           | 1.922           | 2.610          | 3.508          | 6.448    |
| OPTIONAL Override Runoff Volume (acre-ft) =   |       |       |        |        |                 |                 |                |                |          |
| Inflow Hydrograph Volume (acre-ft) =          | 0.214 | 0.391 | 0.277  | 0.421  | 0.832           | 1.922           | 2.610          | 3.508          | 6.443    |
| Predevelopment Unit Peak Flow, q (cfs/acre) = | 0.00  | 0.00  | 0.01   | 0.02   | 0.15            | 0.53            | 0.73           | 0.99           | 1.81     |
| Predevelopment Peak Q (cfs) =                 | 0.0   | 0.0   | 0.3    | 0.479  | 4.5             | 15.5            | 21.5           | 29.2           | 53.1     |
| Peak Inflow Q (cfs) =                         | 3.0   | 5.4   | 3.8    | 5.8    | 11.3            | 26.0            | 35.1           | 47.0           | 85.1     |
| Peak Outflow Q (cfs) =                        | 0.1   | 0.2   | 0.1    | 0.172  | 3.8             | 17.5            | 22.3           | 24.0           | 75.6     |
| Ratio Peak Outflow to Predevelopment Q =      | N/A   | N/A   | N/A    | 0.4    | 0.8             | 1.1             | 1.0            | 0.8            | 1.4      |
| Structure Controlling Flow =                  | Plate | Plate | Plate  | Plate  | Overflow Gate 1 | Overflow Gate 1 | Outlet Plate 1 | Outlet Plate 1 | Spillway |
| Max Velocity through Gate 1 (fps) =           | N/A   | N/A   | N/A    | N/A    | 0.3             | 1.4             | 1.8            | 1.9            | 2.0      |
| Max Velocity through Gate 2 (fps) =           | N/A   | N/A   | N/A    | N/A    | N/A             | N/A             | N/A            | N/A            | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =  | 41    | 53    | 46     | 55     | 57              | 48              | 44             | 39             | 28       |
| Time to Drain 99% of Inflow Volume (hours) =  | 43    | 57    | 49     | 59     | 64              | 60              | 58             | 55             | 47       |
| Maximum Ponding Depth (ft) =                  | 2.22  | 3.05  | 2.54   | 3.18   | 4.00            | 4.67            | 5.11           | 6.22           | 6.96     |
| Area at Maximum Ponding Depth (acres) =       | 0.17  | 0.23  | 0.19   | 0.23   | 0.29            | 0.33            | 0.36           | 0.43           | 0.51     |
| Maximum Volume Stored (acre-ft) =             | 0.194 | 0.362 | 0.255  | 0.390  | 0.607           | 0.814           | 0.962          | 1.402          | 1.746    |

# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

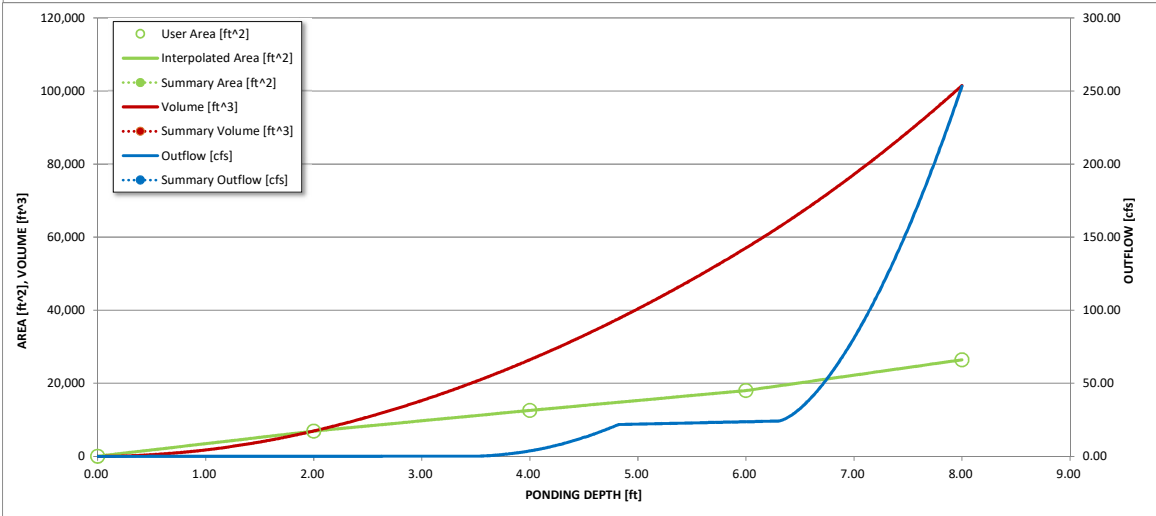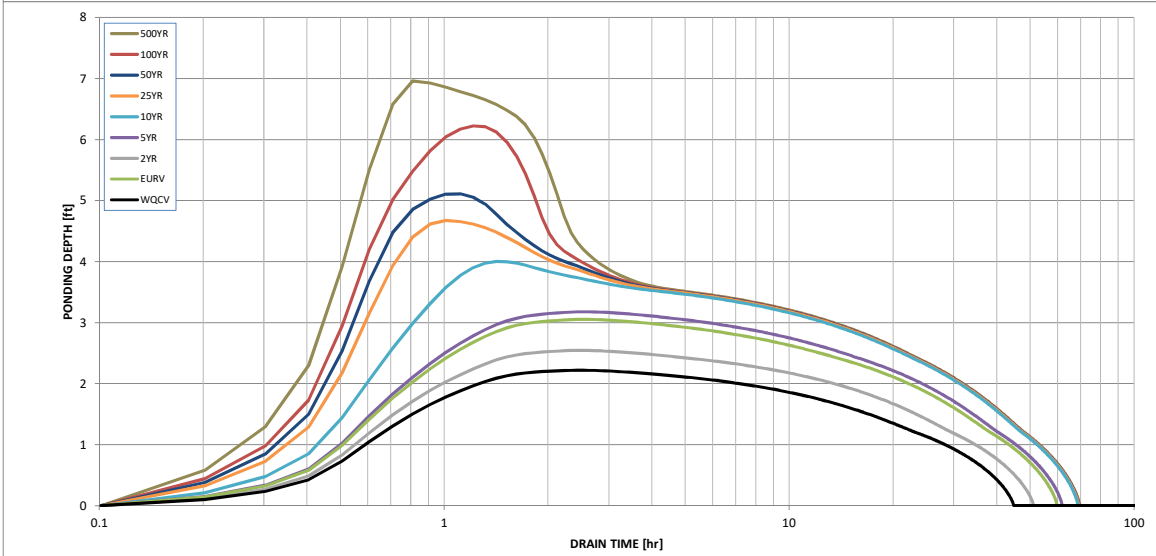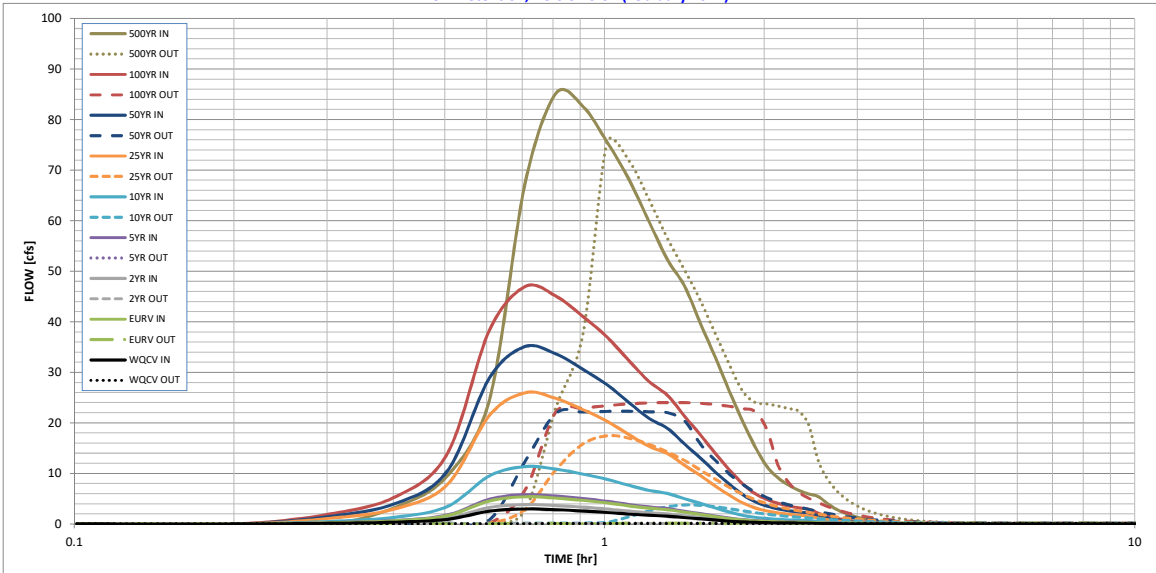

**S-A-V-D Chart Axis Override**

|               | X-axis | Left Y-Axis | Right Y-Axis |
|---------------|--------|-------------|--------------|
| minimum bound |        |             |              |
| maximum bound |        |             |              |






## DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

Project: RETREAT AT TIMBERIDGE FILING NO. 1  
 Basin ID: POND 2



Example Zone Configuration (Retention Pond)

**Required Volume Calculation**

|   |            |           |
|---|------------|-----------|
| Selected BMP Type =                     | <b>EDB</b> |           |
| Watershed Area =                        | 100.40     | acres     |
| Watershed Length =                      | 4,000      | ft        |
| Watershed Slope =                       | 0.032      | ft/ft     |
| Watershed Imperviousness =              | 21.60%     | percent   |
| Percentage Hydrologic Soil Group A =    | 0.0%       | percent   |
| Percentage Hydrologic Soil Group B =    | 100.0%     | percent   |
| Percentage Hydrologic Soil Groups C/D = | 0.0%       | percent   |
| Desired WQCV Drain Time =               | 40.0       | hours     |
| Location for 1-hr Rainfall Depths =     | User Input |           |
| Water Quality Capture Volume (WQCV) =   | 1.022      | acre-feet |
| Excess Urban Runoff Volume (EURV) =     | 2.168      | acre-feet |
| 2-yr Runoff Volume (P1 = 1.19 in.) =    | 1.608      | acre-feet |
| 5-yr Runoff Volume (P1 = 1.5 in.) =     | 2.351      | acre-feet |
| 10-yr Runoff Volume (P1 = 1.75 in.) =   | 3.953      | acre-feet |
| 25-yr Runoff Volume (P1 = 2 in.) =      | 7.552      | acre-feet |
| 50-yr Runoff Volume (P1 = 2.25 in.) =   | 9.864      | acre-feet |
| 100-yr Runoff Volume (P1 = 2.52 in.) =  | 12.887     | acre-feet |
| 500-yr Runoff Volume (P1 = 3.85 in.) =  | 23.106     | acre-feet |
| Approximate 2-yr Detention Volume =     | 1.499      | acre-feet |
| Approximate 5-yr Detention Volume =     | 2.205      | acre-feet |
| Approximate 10-yr Detention Volume =    | 3.488      | acre-feet |
| Approximate 25-yr Detention Volume =    | 4.261      | acre-feet |
| Approximate 50-yr Detention Volume =    | 4.500      | acre-feet |
| Approximate 100-yr Detention Volume =   | 5.494      | acre-feet |

|  |        |
|--|--------|
| Optional User Override<br>1-hr Precipitation |        |
| 1.19   | inches |
| 1.50   | inches |
| 1.75   | inches |
| 2.00   | inches |
| 2.25   | inches |
| 2.52   | inches |
| 3.85   | inches |


**Stage-Storage Calculation**

|   |       |                 |
|---|-------|-----------------|
| Zone 1 Volume (WQCV) =                                  | 1.022 | acre-feet       |
| Zone 2 Volume (EURV - Zone 1) =                         | 1.146 | acre-feet       |
| Zone 3 Volume (100-year - Zones 1 & 2) =                | 3.327 | acre-feet       |
| Total Detention Basin Volume =                          | 5.494 | acre-feet       |
| Initial Surcharge Volume (ISV) =                        | user  | ft <sup>3</sup> |
| Initial Surcharge Depth (ISD) =                         | user  | ft              |
| Total Available Detention Depth (H <sub>total</sub> ) = | user  | ft              |
| Depth of Trickle Channel (H <sub>TC</sub> ) =           | user  | ft              |
| Slope of Trickle Channel (S <sub>TC</sub> ) =           | user  | ft/ft           |
| Slopes of Main Basin Sides (S <sub>main</sub> ) =       | user  | H:V             |
| Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =       | user  |                 |
|   |       |                 |
| Initial Surcharge Area (A <sub>ISV</sub> ) =            | user  | ft <sup>2</sup> |
| Surcharge Volume Length (L <sub>ISV</sub> ) =           | user  | ft              |
| Surcharge Volume Width (W <sub>ISV</sub> ) =            | user  | ft              |
| Depth of Basin Floor (H <sub>f,100yr</sub> ) =          | user  | ft              |
| Length of Basin Floor (L <sub>f,100yr</sub> ) =         | user  | ft              |
| Width of Basin Floor (W <sub>f,100yr</sub> ) =          | user  | ft              |
| Area of Basin Floor (A <sub>f,100yr</sub> ) =           | user  | ft <sup>2</sup> |
| Volume of Basin Floor (V <sub>f,100yr</sub> ) =         | user  | ft <sup>3</sup> |
| Depth of Main Basin (H <sub>main</sub> ) =              | user  | ft              |
| Length of Main Basin (L <sub>main</sub> ) =             | user  | ft              |
| Width of Main Basin (W <sub>main</sub> ) =              | user  | ft              |
| Area of Main Basin (A <sub>main</sub> ) =               | user  | ft <sup>2</sup> |
| Volume of Main Basin (V <sub>main</sub> ) =             | user  | ft <sup>3</sup> |
| Calculated Total Basin Volume (V <sub>total</sub> ) =   | user  | acre-feet       |

| Depth Increment = 2 ft      |            |                              |             |            |                         |   |             |                           |                |
|-----------------------------|------------|------------------------------|-------------|------------|-------------------------|---|-------------|---------------------------|----------------|
| Stage - Storage Description | Stage (ft) | Optional Override Stage (ft) | Length (ft) | Width (ft) | Area (ft <sup>2</sup> ) | Optional Override Area (ft <sup>2</sup> ) | Area (acre) | Volume (ft <sup>3</sup> ) | Volume (ac-ft) |
| Top of Micropool            | 0.00       |                              |             |            | 277                     |   | 0.006       |                           |                |
| 7162                        | 2.00       |                              |             |            | 10,268                  |   | 0.236       | 10,442                    | 0.240          |
| 7164                        | 4.00       |                              |             |            | 30,108                  |   | 0.691       | 50,921                    | 1.169          |
| 7166                        | 6.00       |                              |             |            | 38,919                  |   | 0.893       | 119,948                   | 2.754          |
| 7168                        | 8.00       |                              |             |            | 45,498                  |   | 1.044       | 204,365                   | 4.692          |
| 7170                        | 10.00      |                              |             |            | 52,628                  |   | 1.208       | 302,491                   | 6.944          |

# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

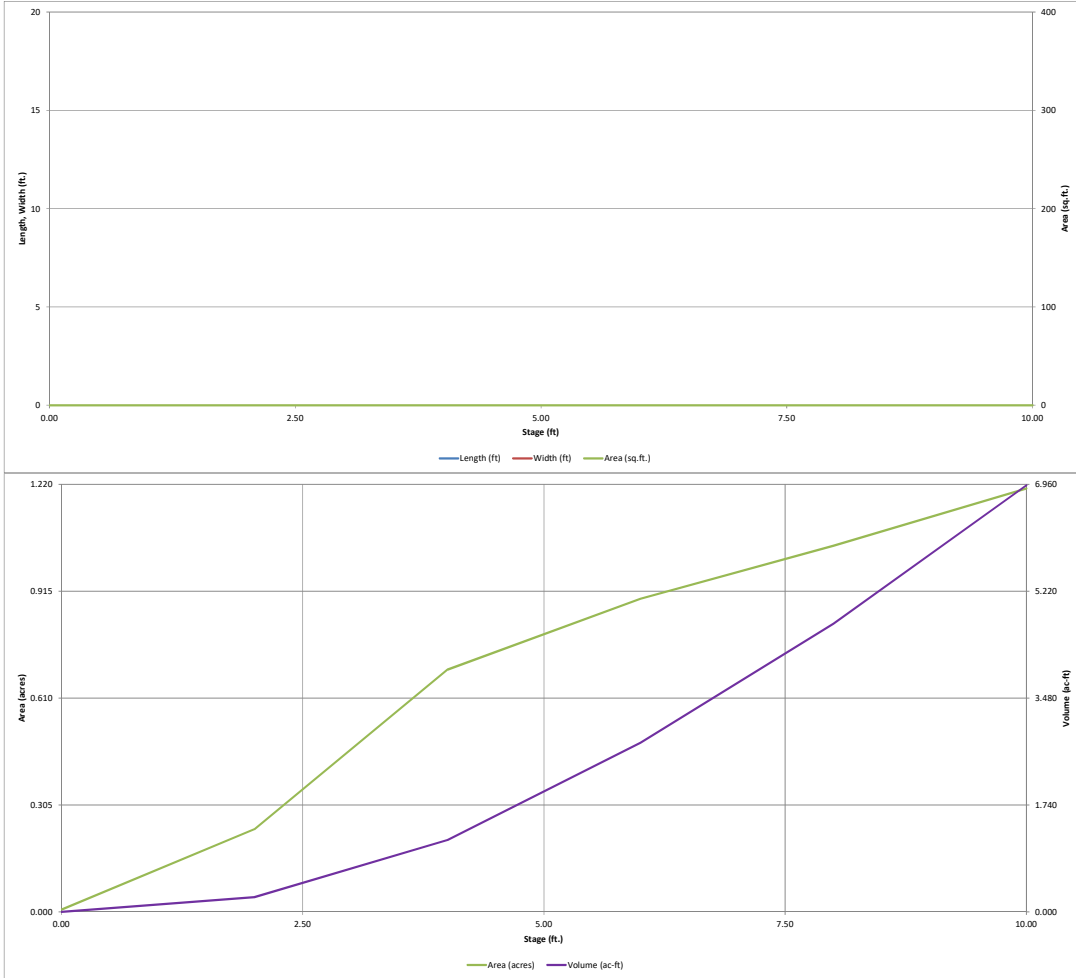




# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: **RETREAT AT TIMBERRIDGE FILING NO. 1**

Basin ID: **POND 2**

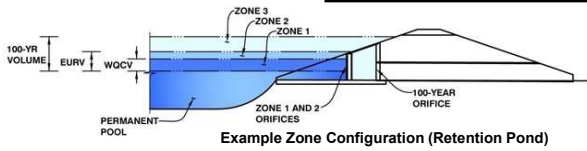

**Example Zone Configuration (Retention Pond)**

|                   | Stage (ft) | Zone Volume (ac-ft) | Outlet Type          |
|-------------------|------------|---------------------|----------------------|
| Zone 1 (WQCV)     | 3.78       | 1.022               | Orifice Plate        |
| Zone 2 (EURV)     | 5.32       | 1.146               | Orifice Plate        |
| Zone 3 (100-year) | 8.75       | 3.327               | Weir&Pipe (Restrict) |
|                   |            | 5.494               | <b>Total</b>         |

**User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)**

|                                   |     |  |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter =     | N/A | inches   |

**Calculated Parameters for Underdrain**

|                               |     |                 |
|-------------------------------|-----|-----------------|
| Underdrain Orifice Area =     | N/A | ft <sup>2</sup> |
| Underdrain Orifice Centroid = | N/A | feet            |

**User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)**

|  |       |   |
|--|-------|---|
| Invert of Lowest Orifice =                 | 0.00  | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 5.50  | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing =  | 16.50 | inches  |
| Orifice Plate: Orifice Area per Row =      | N/A   | inches  |

**Calculated Parameters for Plate**

|                            |     |                 |
|----------------------------|-----|-----------------|
| WQ Orifice Area per Row =  | N/A | ft <sup>2</sup> |
| Elliptical Half-Width =    | N/A | feet            |
| Elliptical Slot Centroid = | N/A | feet            |
| Elliptical Slot Area =     | N/A | ft <sup>2</sup> |

**User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)**

|                                | Row 1 (required) | Row 2 (optional)  | Row 3 (optional)  | Row 4 (optional)  | Row 5 (optional)  | Row 6 (optional)  | Row 7 (optional)  | Row 8 (optional)  |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.40              | 2.80              | 4.20              |                   |                   |                   |                   |
| Orifice Area (sq. inches)      | 3.00             | 4.00              | 4.00              | 4.00              |                   |                   |                   |                   |
|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

**User Input: Vertical Orifice (Circular or Rectangular)**

|   | Not Selected | Not Selected |   |
|---|--------------|--------------|---|
| Invert of Vertical Orifice =                  | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | N/A          | N/A          | inches  |

**Calculated Parameters for Vertical Orifice**

|                             | Not Selected | Not Selected |                 |
|-----------------------------|--------------|--------------|-----------------|
| Vertical Orifice Area =     | N/A          | N/A          | ft <sup>2</sup> |
| Vertical Orifice Centroid = | N/A          | N/A          | feet            |

**User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)**

|                                       | Zone 3 Weir | Not Selected |   |
|---------------------------------------|-------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 5.50        | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 12.00       | N/A          | feet  |
| Overflow Weir Slope =                 | 4.00        | N/A          | H:V (enter zero for flat grate)               |
| Horiz. Length of Weir Sides =         | 4.00        | N/A          | feet  |
| Overflow Grate Open Area % =          | 75%         | N/A          | %, grate open area/total area                 |
| Debris Clogging % =                   | 50%         | N/A          | %   |

**Calculated Parameters for Overflow Weir**

|  | Zone 3 Weir | Not Selected |                 |
|--|-------------|--------------|-----------------|
| Height of Grate Upper Edge, H <sub>g</sub> = | 6.50        | N/A          | feet            |
| Over Flow Weir Slope Length =                | 4.12        | N/A          | feet            |
| Grate Open Area / 100-yr Orifice Area =      | 6.22        | N/A          | should be ≥ 4   |
| Overflow Grate Open Area w/o Debris =        | 37.11       | N/A          | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | 18.55       | N/A          | ft <sup>2</sup> |

**User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)**

|   | Zone 3 Restrictor | Not Selected |  |
|---|-------------------|--------------|--|
| Depth to Invert of Outlet Pipe =            | 2.50              | N/A          | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 42.00             | N/A          | inches   |
| Restrictor Plate Height Above Pipe Invert = | 25.00             |              | inches   |

**Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate**

|  | Zone 3 Restrictor | Not Selected |                 |
|--|-------------------|--------------|-----------------|
| Outlet Orifice Area =                            | 5.97              | N/A          | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | 1.18              | N/A          | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | 1.76              | N/A          | radians         |

**User Input: Emergency Spillway (Rectangular or Trapezoidal)**

|                                     |       |   |
|-------------------------------------|-------|---|
| Spillway Invert Stage =             | 9.00  | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length =             | 65.00 | feet  |
| Spillway End Slopes =               | 3.00  | H:V   |
| Freeboard above Max Water Surface = |       | feet  |

**Calculated Parameters for Spillway**




|                                  |      |       |
|----------------------------------|------|-------|
| Spillway Design Flow Depth =     | 0.96 | feet  |
| Stage at Top of Freeboard =      | 9.96 | feet  |
| Basin Area at Top of Freeboard = | 1.20 | acres |

**Routed Hydrograph Results**

|   | WQCV  | EURV  | 2 Year | 5 Year | 10 Year         | 25 Year         | 50 Year        | 100 Year       | 500 Year |
|---|-------|-------|--------|--------|-----------------|-----------------|----------------|----------------|----------|
| Design Storm Return Period =                  |       |       |        |        |                 |                 |                |                |          |
| One-Hour Rainfall Depth (in) =                | 0.53  | 1.07  | 1.19   | 1.50   | 1.75            | 2.00            | 2.25           | 2.52           | 3.85     |
| Calculated Runoff Volume (acre-ft) =          | 1.022 | 2.168 | 1.608  | 2.351  | 3.953           | 7.552           | 9.864          | 12.887         | 23.106   |
| OPTIONAL Override Runoff Volume (acre-ft) =   |       |       |        |        |                 |                 |                |                |          |
| Inflow Hydrograph Volume (acre-ft) =          | 1.021 | 2.165 | 1.607  | 2.349  | 3.949           | 7.544           | 9.852          | 12.868         | 23.079   |
| Predevelopment Unit Peak Flow, q (cfs/acre) = | 0.00  | 0.00  | 0.01   | 0.02   | 0.17            | 0.58            | 0.80           | 1.08           | 1.97     |
| Predevelopment Peak Q (cfs) =                 | 0.0   | 0.0   | 1.0    | 1.800  | 17.0            | 58.0            | 80.3           | 108.7          | 197.5    |
| Peak Inflow Q (cfs) =                         | 15.1  | 31.7  | 23.6   | 34.3   | 57.3            | 107.8           | 139.7          | 180.8          | 316.4    |
| Peak Outflow Q (cfs) =                        | 0.5   | 0.8   | 0.7    | 0.858  | 17.1            | 62.2            | 85.9           | 91.9           | 96.7     |
| Ratio Peak Outflow to Predevelopment Q =      | N/A   | N/A   | N/A    | 0.5    | 1.0             | 1.1             | 1.1            | 0.8            | 0.5      |
| Structure Controlling Flow =                  | Plate | Plate | Plate  | Plate  | Overflow Gate 1 | Overflow Gate 1 | Outlet Plate 1 | Outlet Plate 1 | N/A      |
| Max Velocity through Gate 1 (fps) =           | N/A   | N/A   | N/A    | N/A    | 0.4             | 1.7             | 2.3            | 2.4            | 2.6      |
| Max Velocity through Gate 2 (fps) =           | N/A   | N/A   | N/A    | N/A    | N/A             | N/A             | N/A            | N/A            | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =  | 44    | 59    | 53     | 61     | 59              | 53              | 49             | 46             | 36       |
| Time to Drain 99% of Inflow Volume (hours) =  | 47    | 65    | 58     | 68     | 68              | 64              | 62             | 59             | 53       |
| Maximum Ponding Depth (ft) =                  | 3.65  | 5.15  | 4.46   | 5.37   | 6.24            | 7.13            | 7.61           | 8.91           | 10.00    |
| Area at Maximum Ponding Depth (acres) =       | 0.61  | 0.81  | 0.74   | 0.83   | 0.91            | 0.98            | 1.02           | 1.12           | 1.21     |
| Maximum Volume Stored (acre-ft) =             | 0.935 | 2.031 | 1.498  | 2.203  | 2.961           | 3.802           | 4.290          | 5.676          | 6.944    |

# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

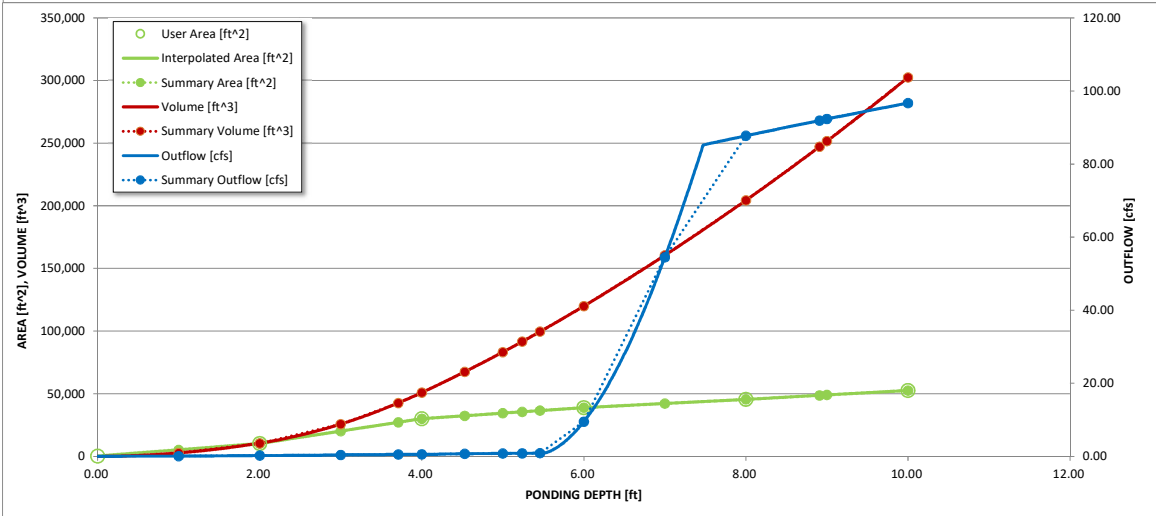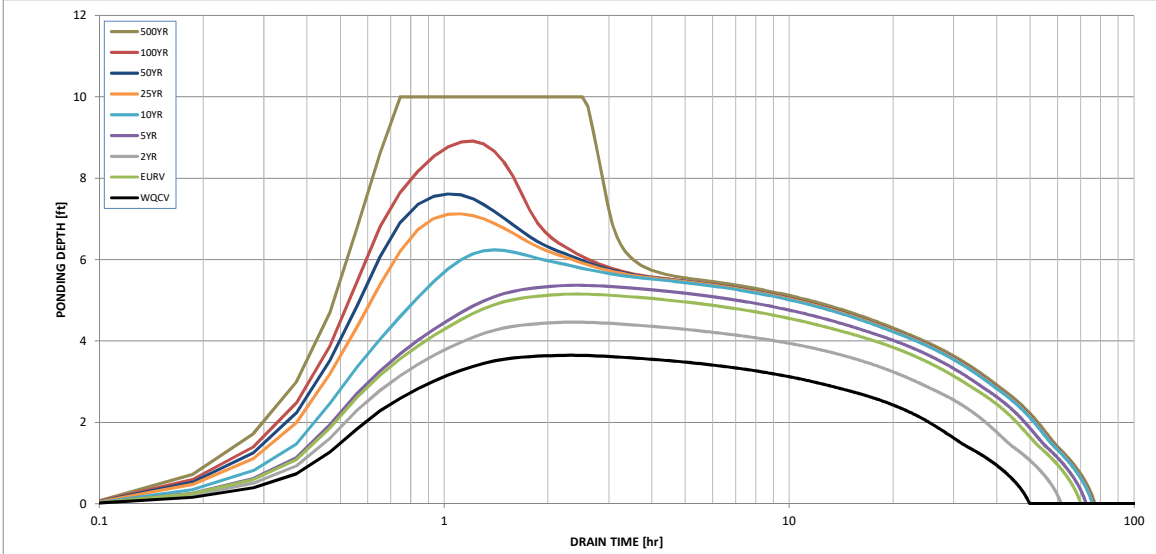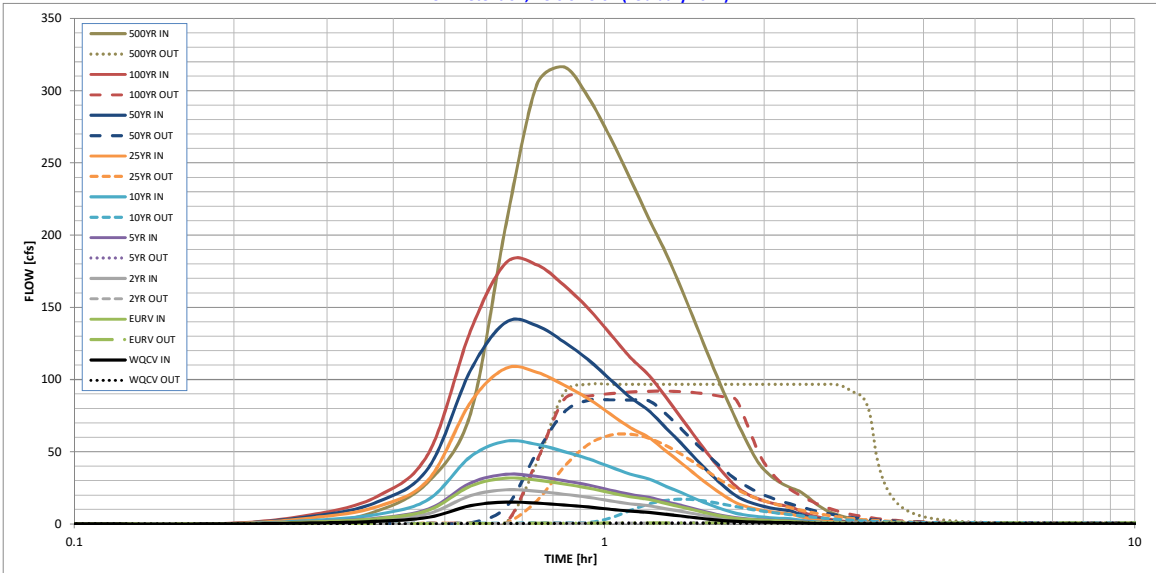

**S-A-V-D Chart Axis Override**


|               | X-axis | Left Y-Axis | Right Y-Axis |
|---------------|--------|-------------|--------------|
| minimum bound |        |             |              |
| maximum bound |        |             |              |







| DESCRIPTION                | LEGEND | SYMBOL |
|----------------------------|--------|--------|
| EXISTING GROUND CONTOUR    | 6910   |        |
| PROPOSED FINISHED CONTOUR  | 6910   |        |
| BASIN BOUNDARY             |        |        |
| BASIN IDENTIFIER           |        |        |
| AREA IN ACRES              |        |        |
| DESIGN POINT               |        |        |
| EXISTING DIRECTION OF FLOW |        |        |
| PROPOSED DIRECTION OF FLOW |        |        |
| DRAINAGE IMPROVEMENTS      |        |        |
| PIPE RUN                   |        |        |
| WETLAND DELINEATION        |        |        |

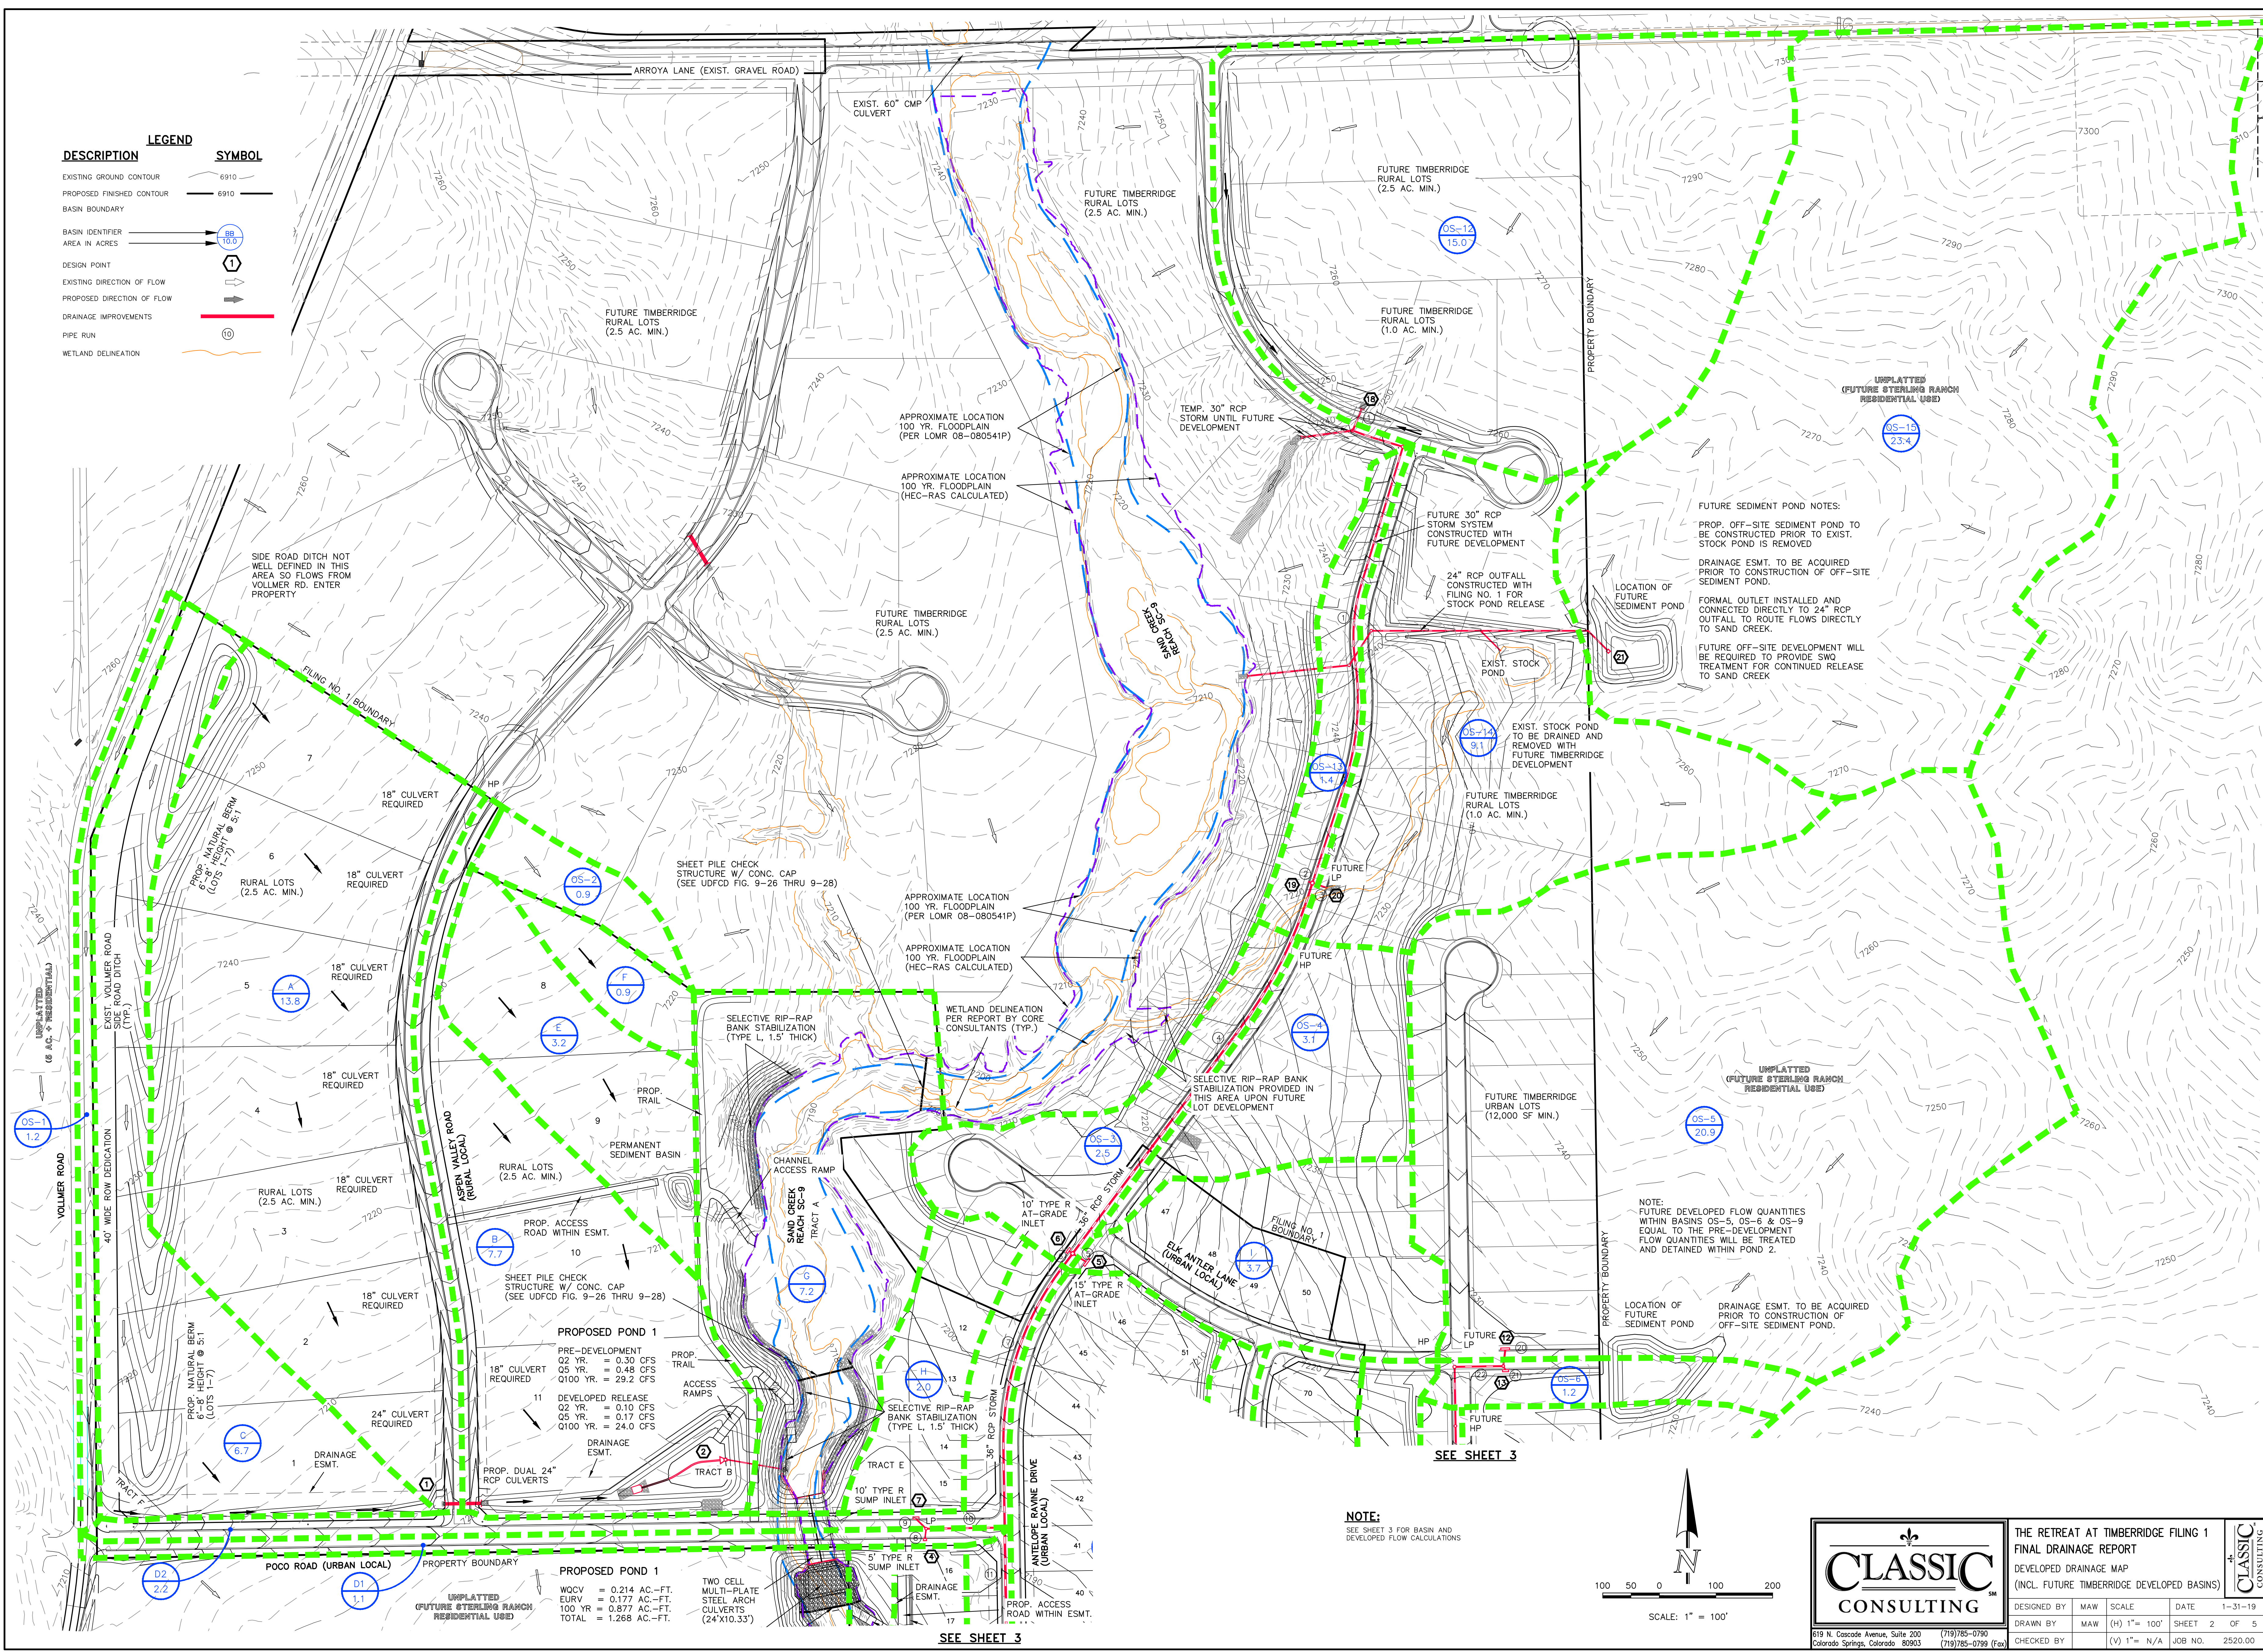

**FUTURE SEDIMENT POND NOTES:**  
 PROP. OFF-SITE SEDIMENT POND TO BE CONSTRUCTED PRIOR TO EXIST. STOCK POND IS REMOVED.  
 DRAINAGE ESMT. TO BE ACQUIRED PRIOR TO CONSTRUCTION OF OFF-SITE SEDIMENT POND.  
 FORMAL OUTLET INSTALLED AND CONNECTED DIRECTLY TO 24" RCP OUTFALL TO ROUTE FLOWS DIRECTLY TO SAND CREEK.  
 FUTURE OFF-SITE DEVELOPMENT WILL BE REQUIRED TO PROVIDE SWO TREATMENT FOR CONTINUED RELEASE TO SAND CREEK.

**NOTE:**  
 FUTURE DEVELOPED FLOW QUANTITIES WITHIN BASINS OS-5, OS-6 & OS-9 EQUAL TO THE PRE-DEVELOPMENT FLOW QUANTITIES WILL BE TREATED AND DETAINED WITHIN POND 2.

**PROPOSED POND 1**


|                   |          |
|-------------------|----------|
| PRE-DEVELOPMENT   |          |
| Q2 YR. =          | 0.30 CFS |
| Q5 YR. =          | 0.48 CFS |
| Q100 YR. =        | 29.2 CFS |
| DEVELOPED RELEASE |          |
| Q2 YR. =          | 0.10 CFS |
| Q5 YR. =          | 0.17 CFS |
| Q100 YR. =        | 24.0 CFS |

**PROPOSED POND 1**

|          |               |
|----------|---------------|
| WOCV =   | 0.214 AC.-FT. |
| EURV =   | 0.177 AC.-FT. |
| 100 YR = | 0.877 AC.-FT. |
| TOTAL =  | 1.268 AC.-FT. |

TWO CELL MULTI-PLATE STEEL ARCH CULVERTS (24'X10'3")

**NOTE:**  
 SEE SHEET 3 FOR BASIN AND DEVELOPED FLOW CALCULATIONS

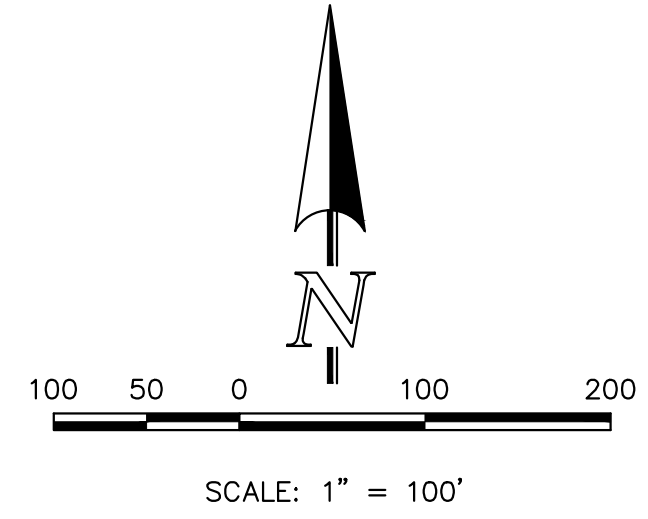

|            |   |               |         |        |
|------------|---|---------------|---------|--------|
|            | <b>THE RETREAT AT TIMBERRIDGE FILING 1</b><br><b>FINAL DRAINAGE REPORT</b><br>DEVELOPED DRAINAGE MAP<br>(INCL. FUTURE TIMBERRIDGE DEVELOPED BASINS) |               |         |        |
|            | DESIGNED BY   | MAW           | SCALE   | DATE   |
| DRAWN BY   | MAW   | (H) 1" = 100' | SHEET   | 2 OF 5 |
| CHECKED BY | (V) 1" = N/A  | JOB NO.       | 2520.00 |        |


619 N. Cascade Avenue, Suite 200 (719)785-0790  
 Colorado Springs, Colorado 80903 (719)785-0799 (Fax)








| DESCRIPTION                | SYMBOL |
|----------------------------|--------|
| EXISTING GROUND CONTOUR    | 6910   |
| PROPOSED FINISHED CONTOUR  | 6910   |
| BASIN BOUNDARY             | —      |
| BASIN IDENTIFIER           | OS-1   |
| AREA IN ACRES              | 10.0   |
| DESIGN POINT               | ①      |
| EXISTING DIRECTION OF FLOW | →      |
| PROPOSED DIRECTION OF FLOW | →      |
| DRAINAGE IMPROVEMENTS      | —      |
| PIPE RUN                   | ⑩      |

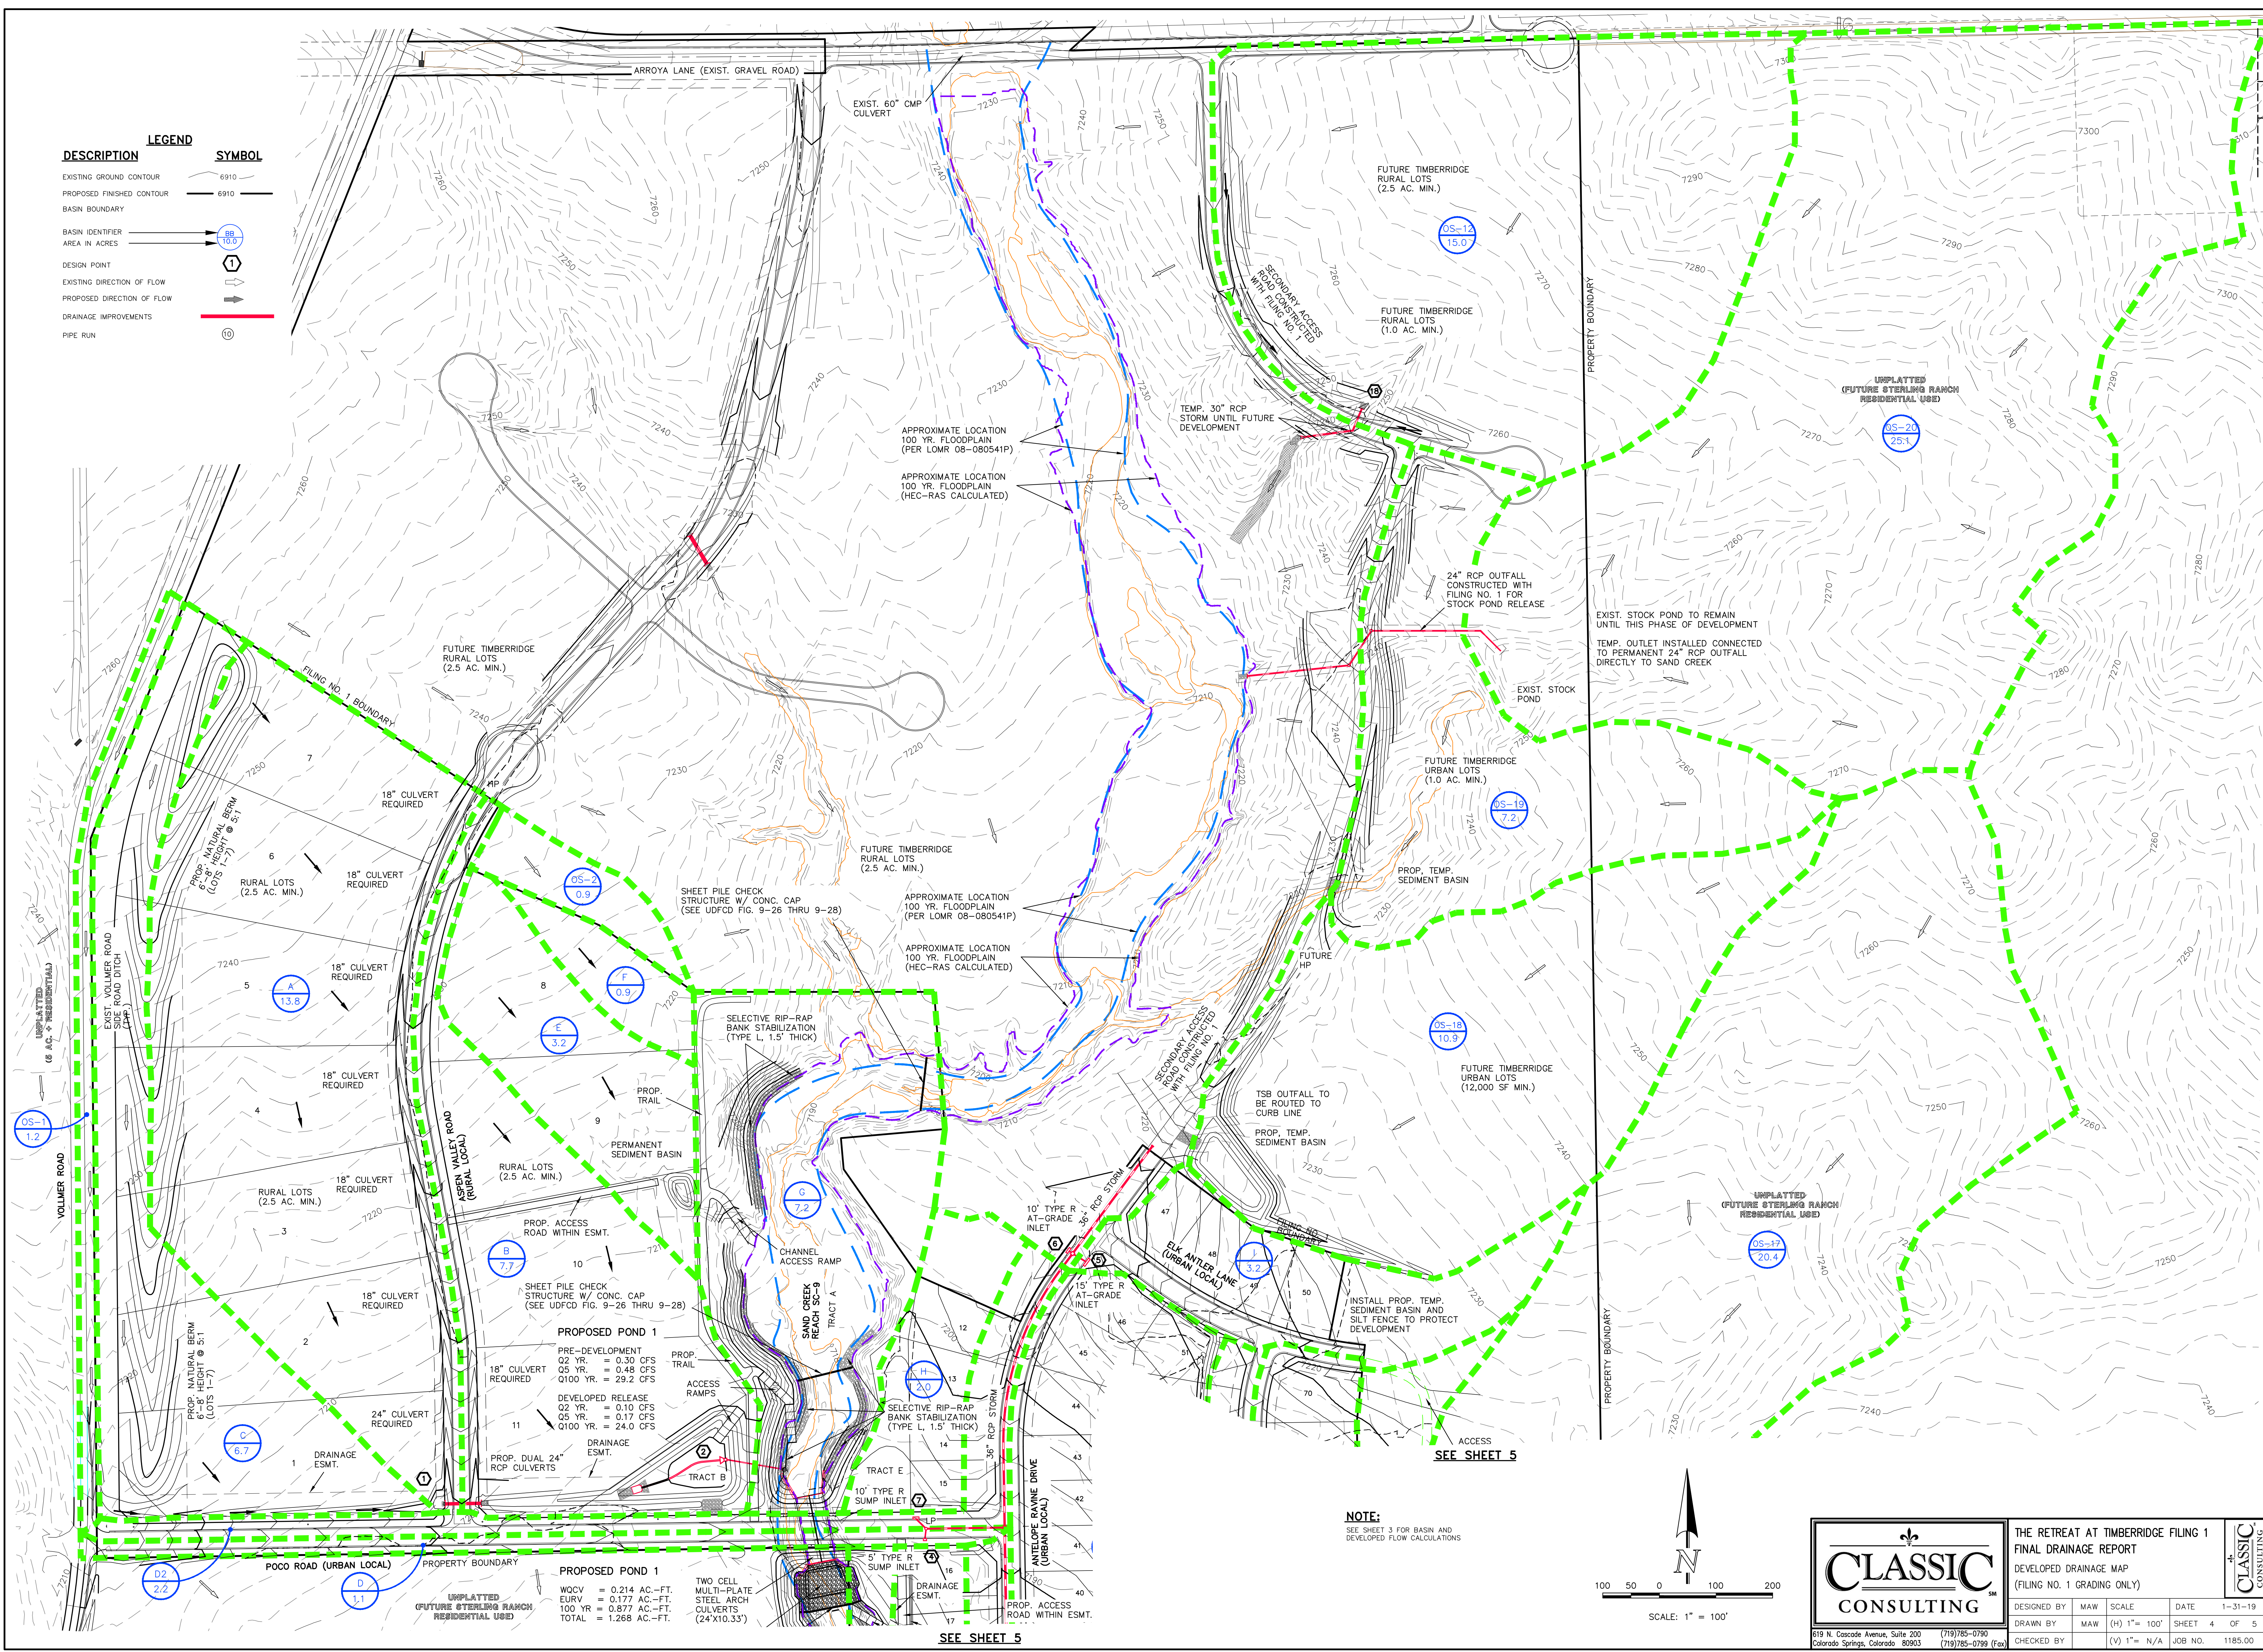

**PROPOSED POND 1**  
 PRE-DEVELOPMENT  
 Q2 YR. = 0.30 CFS  
 Q5 YR. = 0.48 CFS  
 Q100 YR. = 29.2 CFS  
 DEVELOPED RELEASE  
 Q2 YR. = 0.10 CFS  
 Q5 YR. = 0.17 CFS  
 Q100 YR. = 24.0 CFS

**PROPOSED POND 1**  
 WOCV = 0.214 AC.-FT.  
 EURV = 0.177 AC.-FT.  
 100 YR. = 0.977 AC.-FT.  
 TOTAL = 1.268 AC.-FT.  
 TWO CELL MULTI-PLATE STEEL ARCH CULVERTS (24'X10.33')

**NOTE:**  
 SEE SHEET 3 FOR BASIN AND DEVELOPED FLOW CALCULATIONS

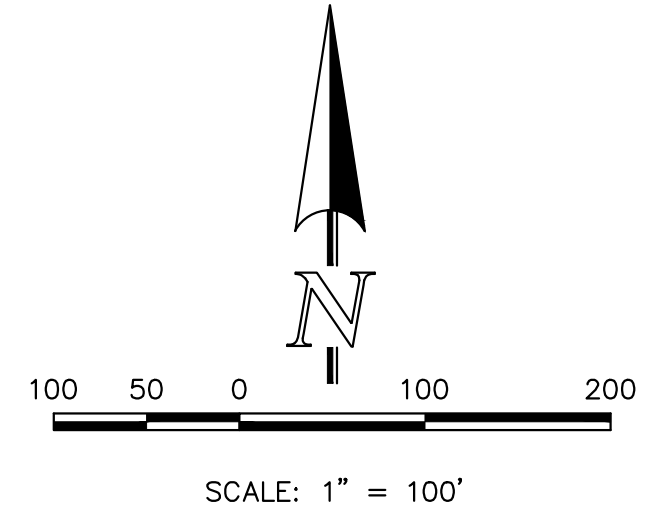

|   |             |              |         |
|---|-------------|--------------|---------|
| <b>THE RETREAT AT TIMBERIDGE FILING NO. 1</b> |             |              |         |
| FINAL DRAINAGE REPORT                         |             |              |         |
| DEVELOPED DRAINAGE MAP                        |             |              |         |
| (FILING NO. 1 GRADING ONLY)                   |             |              |         |
| DESIGNED BY                                   | MAW         | SCALE        | DATE    |
| DRAWN BY                                      | MAW         | (H) 1"= 100' | 1-31-19 |
| CHECKED BY                                    | (V) 1"= N/A | JOB NO.      | 1185.00 |


SEE SHEET 5

SEE SHEET 5



| FINAL DRAINAGE REPORT - SURFACE ROUTING SUMMARY |  |                  |                    |            |      |        |      |            |                               |
|---|--|------------------|--------------------|------------|------|--------|------|------------|-------------------------------|
| Design Point(s)                                 | Contributing Basins  | Intensity        |                    |            | Flow |        |      | Inlet Size |                               |
|   |  | Equivalent CA(5) | Equivalent CA(100) | Maximum Tc | I(5) | I(100) | Q(5) |            |                               |
| 1   | A (13.8 Ac), OS-1 (1.2 Ac) and C (8.7 Ac)  | 3.58             | 9.08               | 31.8       | 2.39 | 4.02   | 9    | 36         | DUAL 24" RCP CULVERTS         |
| 2   | TOTAL INFLOW INTO POND 1 A, B, C and OS-1 (28.4 Ac)  | 4.66             | 12.16              | 33.8       | 2.30 | 3.86   | 11   | 47         | POND 1                        |
| 3   | No longer used   |                  |                    |            |      |        |      |            |                               |
| 4   | D1 (1.1 Ac)  | 0.74             | 0.87               | 15.2       | 3.50 | 5.88   | 3    | 5          | 6" TYFER SUMP INLET           |
| 5   | OS-4 (3.1 Ac), I (3.7 Ac)  | 1.61             | 3.17               | 17.7       | 3.28 | 5.50   | 5    | 17         | 10" TYFER AT-GRADE INLET      |
| 6   | OS-3 (2.5 Ac)  | 0.63             | 1.18               | 11.9       | 3.86 | 6.49   | 2    | 8          | 10" TYFER AT-GRADE INLET      |
| 7   | Basin D2, Basin Hand 50% of 100 yr Flow from DP-6 (5.5 Ac)                                   | 1.51             | 2.47               | 27.3       | 2.62 | 4.40   | 4    | 11         | 10" TYFER SUMP INLET          |
| 8   | K (1.5 Ac)   | 0.38             | 0.71               | 12.6       | 3.78 | 6.35   | 1    | 4          | 6" TYFER SUMP INLET           |
| 9   | J and OS-7 (5.7 Ac)  | 1.43             | 2.88               | 16.0       | 3.43 | 5.75   | 5    | 15         | 10" TYFER SUMP INLET          |
| 10  | Flow from DP-5 and Basin L (7.3 Ac)  | 1.83             | 4.29               | 21.2       | 3.00 | 5.04   | 5    | 22         | 10" TYFER AT-GRADE INLET      |
| 11  | Basins N, O, P and 50% 100 Yr Flow from DP-6 and portion of 100 yr Flow from DP-10 (13.6 Ac) | 1.58             | 4.54               | 24.2       | 2.80 | 4.70   | 4    | 21         | 10" TYFER SUMP INLET          |
| 12  | OS-5 (20.9 Ac)   | 2.93             | 6.27               | 19.9       | 3.08 | 5.19   | 9    | 33         | 10" TYFER SUMP INLET          |
| 13  | OS-6 (1.2 Ac)  | 0.19             | 2.06               | 12.4       | 3.80 | 6.39   | 1    | 13         | 10" TYFER SUMP INLET          |
| 14  | OS-8 (1.0 Ac)  | 0.25             | 0.47               | 11.0       | 3.99 | 6.70   | 1    | 3          | 6" TYFER SUMP INLET           |
| 15  | OS-9 (5.3 Ac)  | 0.85             | 2.17               | 16.0       | 3.42 | 5.74   | 3    | 12         | 10" TYFER SUMP INLET          |
| 16  | OS-10 (1.0 Ac)   | 0.25             | 0.47               | 11.0       | 3.99 | 6.69   | 1    | 3          | 6" TYFER SUMP INLET           |
| 17  | OS-11 (7.9 Ac)   | 1.98             | 3.71               | 14.7       | 3.55 | 5.96   | 7    | 22         | 10" TYFER SUMP INLET          |
| 18  | OS-12 (15.0 Ac)  | 2.10             | 6.00               | 22.0       | 2.94 | 4.94   | 6    | 30         | 30" RCP CULVERT               |
| 19  | OS-13 (1.4 Ac)   | 0.28             | 0.62               | 12.2       | 3.83 | 6.42   | 1    | 4          | 6" TYFER SUMP INLET           |
| 20  | OS-14 (8.1 Ac)   | 1.82             | 4.00               | 19.9       | 3.10 | 5.20   | 6    | 21         | 6" TYFER SUMP INLET           |
| 21  | TOTAL INFLOW INTO EXIST. STOCK POND (23.4 Ac)  | 2.11             | 8.42               | 29.8       | 2.49 | 4.18   | 5    | 35         | EXIST. STOCK POND WITH OUTLET |
| 22  | TOTAL INFLOW INTO POND 2 (104.8 Ac)  | 20.50            | 45.77              | 30.0       | 2.48 | 4.16   | 51   | 191        | POND 2                        |

| DESCRIPTION                | LEGEND | SYMBOL |
|----------------------------|--------|--------|
| EXISTING GROUND CONTOUR    |        | 6910   |
| PROPOSED FINISHED CONTOUR  |        | 6910   |
| BASIN BOUNDARY             |        |        |
| BASIN IDENTIFIER           |        | OS-100 |
| AREA IN ACRES              |        | 10.0   |
| DESIGN POINT               |        | 1      |
| EXISTING DIRECTION OF FLOW |        |        |
| PROPOSED DIRECTION OF FLOW |        |        |
| DRAINAGE IMPROVEMENTS      |        |        |

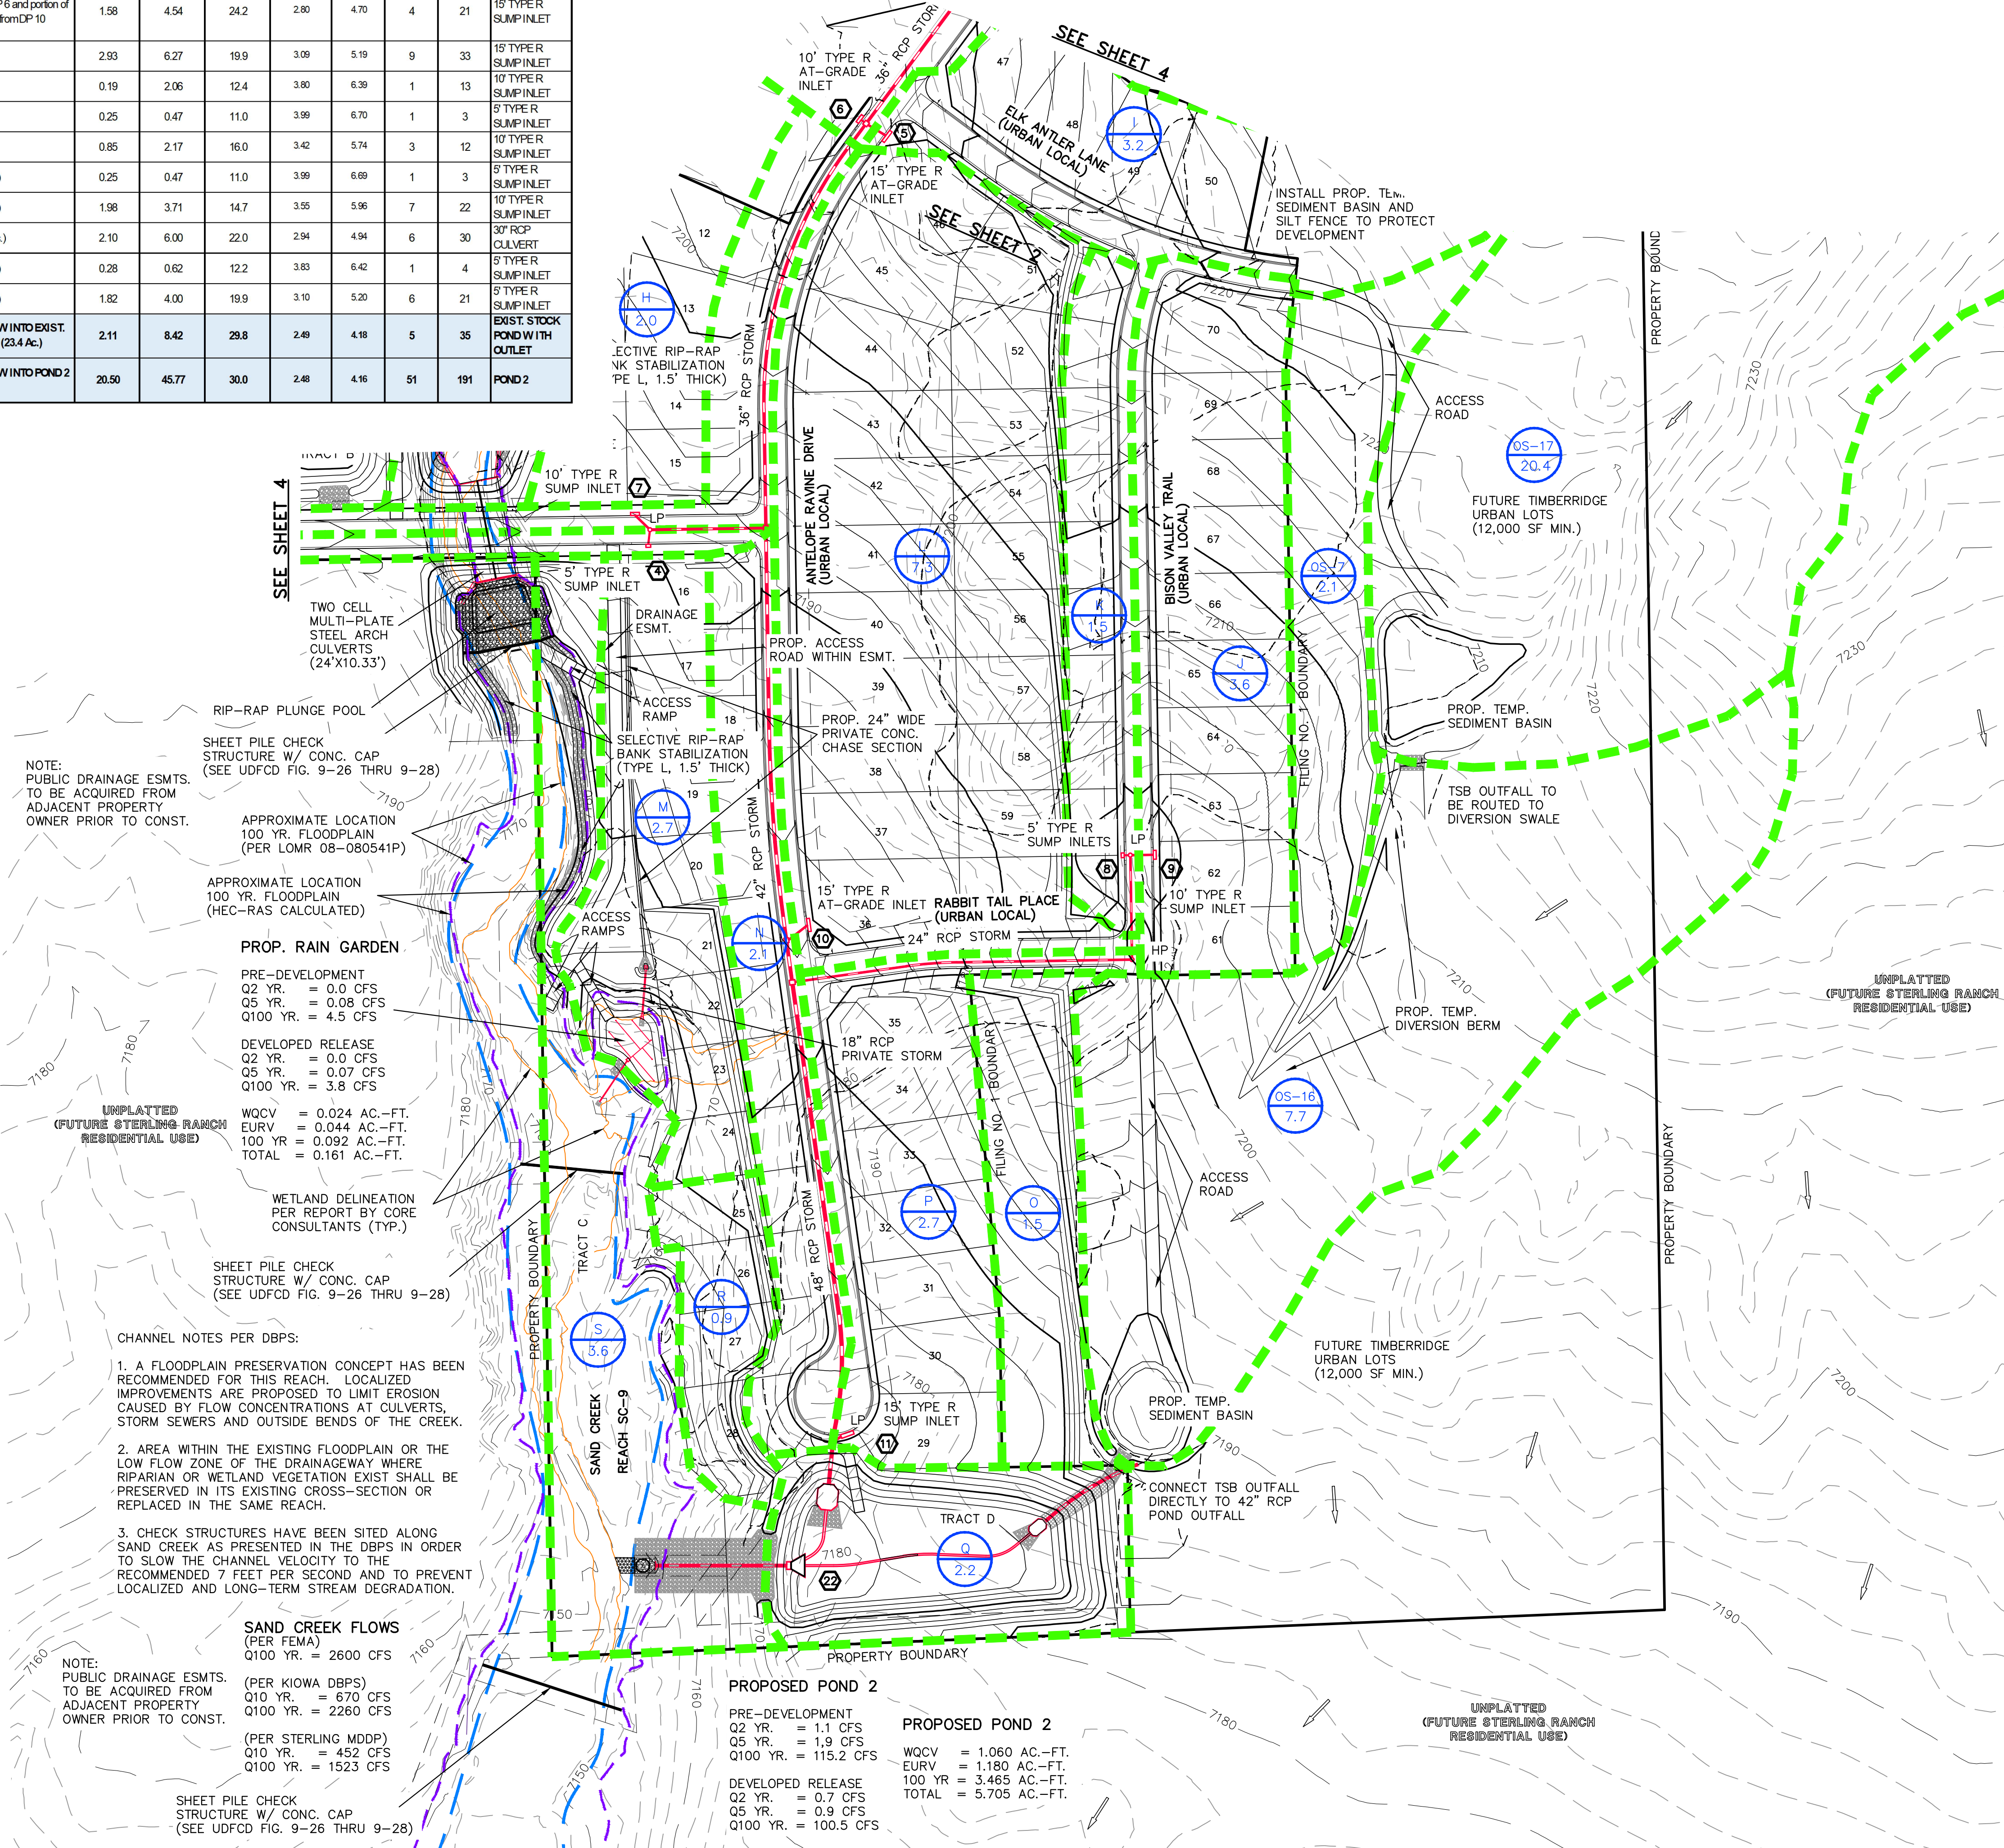

| FINAL DRAINAGE REPORT - BASIN RUNOFF SUMMARY |          |       |        |        |        |          |      |             |             |                       |             |           |                 |           |             |      |      |             |       |       |        |      |      |        |
|--|----------|-------|--------|--------|--------|----------|------|-------------|-------------|-----------------------|-------------|-----------|-----------------|-----------|-------------|------|------|-------------|-------|-------|--------|------|------|--------|
| BASIN  | WEIGHTED |       |        |        |        | OVERLAND |      |             |             | STREET / CHANNEL FLOW |             |           |                 | INTENSITY |             |      |      | TOTAL FLOWS |       |       |        |      |      |        |
|  | CA(2)    | CA(5) | CA(10) | CA(25) | CA(50) | CA(100)  | C(5) | Length (ft) | Height (ft) | Tc (min)              | Length (ft) | Slope (%) | Velocity (ft/s) | Tc (min)  | TOTAL (cfs) | I(2) | I(5) | I(10)       | I(25) | I(50) | I(100) | Q(2) | Q(5) | Q(100) |
| OS-1   | 0.88     | 0.71  | 0.76   | 0.82   | 0.85   | 0.88     | 0.08 | 10          | 0.2         | 4.8                   | 1700        | 3.5%      | 1.9             | 151       | 18.8        | 2.46 | 3.11 | 3.62        | 4.14  | 4.66  | 5.21   | 2    | 2    | 9      |
| OS-2   | 0.02     | 0.07  | 0.14   | 0.23   | 0.27   | 0.32     | 0.08 | 300         | 10.5        | 21.1                  | 21          | 2.41      | 3.01            | 3.91      | 4.01        | 4.51 | 5.05 | 5.57        | 6.07  | 6.57  | 7.07   | 2    | 2    | 16     |
| OS-3   | 0.45     | 0.63  | 0.80   | 0.96   | 1.08   | 1.18     | 0.25 | 35          | 1.1         | 9.1                   | 800         | 3.0%      | 3.5             | 2.9       | 11.9        | 3.08 | 3.96 | 4.51        | 5.15  | 5.80  | 6.49   | 1    | 2    | 8      |
| OS-4   | 0.47     | 0.68  | 0.93   | 1.15   | 1.27   | 1.43     | 0.22 | 200         | 6           | 15.6                  | 400         | 3.0%      | 3.5             | 1.9       | 17.6        | 2.62 | 3.28 | 3.83        | 4.38  | 4.93  | 5.51   | 1    | 2    | 8      |
| OS-5   | 1.25     | 2.03  | 4.81   | 6.48   | 7.52   | 8.36     | 0.14 | 200         | 8           | 15.5                  | 750         | 2.0%      | 2.8             | 4.4       | 19.9        | 2.47 | 3.09 | 3.61        | 4.13  | 4.64  | 5.19   | 3    | 9    | 40     |
| OS-6   | 0.08     | 0.19  | 0.29   | 0.38   | 0.44   | 0.49     | 0.16 | 55          | 1.1         | 10.0                  | 900         | 3.0%      | 3.5             | 2.4       | 12.4        | 3.04 | 3.80 | 4.44        | 5.07  | 5.74  | 6.39   | 0.3  | 1    | 3      |
| OS-7   | 0.38     | 0.53  | 0.67   | 0.82   | 0.90   | 0.99     | 0.25 | 100         | 10          | 7.2                   |             |           |                 | 7.2       | 3.89        | 4.63 | 5.40 | 6.17        | 6.94  | 7.77  | 1      | 2    | 8    |        |
| OS-8   | 0.18     | 0.25  | 0.32   | 0.39   | 0.43   | 0.47     | 0.25 | 55          | 1.1         | 9.1                   | 400         | 3.0%      | 3.5             | 1.9       | 11.0        | 3.18 | 3.98 | 4.65        | 5.32  | 5.98  | 6.70   | 1    | 1    | 3      |
| OS-9   | 0.37     | 0.65  | 1.27   | 1.70   | 1.96   | 2.17     | 0.16 | 200         | 10          | 14.1                  | 400         | 3.0%      | 3.5             | 1.9       | 16.0        | 2.73 | 3.42 | 3.99        | 4.56  | 5.13  | 5.74   | 1    | 3    | 12     |
| OS-10  | 0.18     | 0.25  | 0.32   | 0.39   | 0.43   | 0.47     | 0.25 | 55          | 1.1         | 9.1                   | 450         | 3.0%      | 3.9             | 1.9       | 11.0        | 3.18 | 3.99 | 4.65        | 5.32  | 5.98  | 6.69   | 1    | 1    | 3      |
| OS-11  | 1.42     | 1.98  | 2.33   | 3.08   | 3.40   | 3.71     | 0.25 | 200         | 10          | 12.8                  | 450         | 3.0%      | 3.9             | 1.9       | 14.7        | 2.84 | 3.55 | 4.14        | 4.74  | 5.33  | 5.96   | 4    | 7    | 22     |
| OS-12  | 0.90     | 2.10  | 3.45   | 4.65   | 5.40   | 6.00     | 0.14 | 300         | 13          | 16.5                  | 600         | 2.0%      | 2.8             | 3.5       | 22.0        | 2.35 | 2.94 | 3.43        | 3.93  | 4.42  | 4.94   | 2    | 6    | 30     |
| OS-13  | 0.17     | 0.28  | 0.38   | 0.49   | 0.56   | 0.62     | 0.20 | 55          | 1.1         | 9.6                   | 450         | 2.0%      | 2.8             | 2.7       | 12.2        | 3.05 | 3.83 | 4.46        | 5.10  | 5.74  | 6.42   | 0.5  | 1    | 4      |
| OS-14  | 1.09     | 1.82  | 2.48   | 3.19   | 3.64   | 4.00     | 0.20 | 300         | 12          | 17.8                  | 300         | 2.0%      | 2.8             | 2.1       | 19.9        | 2.48 | 3.10 | 3.62        | 4.13  | 4.65  | 5.20   | 3    | 6    | 21     |
| OS-15  | 0.70     | 2.11  | 3.98   | 6.08   | 7.25   | 8.42     | 0.09 | 300         | 16          | 16.2                  | 1300        | 3.0%      | 1.9             | 11.6      | 28.6        | 2.00 | 2.49 | 2.91        | 3.32  | 3.74  | 4.15   | 1    | 5    | 25     |
| OS-16  | 0.23     | 0.69  | 1.31   | 2.00   | 2.39   | 2.77     | 0.09 | 300         | 10          | 21.2                  | 600         | 3.0%      | 1.9             | 5.3       | 26.6        | 2.13 | 2.68 | 3.11        | 3.55  | 4.00  | 4.47   | 0.5  | 2    | 12     |
| OS-17  | 0.61     | 1.84  | 3.47   | 5.30   | 6.32   | 7.34     | 0.09 | 300         | 9.5         | 21.6                  | 650         | 3.0%      | 1.9             | 5.8       | 27.4        | 2.10 | 2.62 | 3.05        | 3.49  | 3.93  | 4.39   | 1.3  | 5    | 32     |
| OS-18  | 0.33     | 0.68  | 1.05   | 2.83   | 3.38   | 3.92     | 0.09 | 300         | 10          | 21.2                  | 700         | 3.0%      | 1.9             | 6.2       | 27.5        | 2.09 | 2.61 | 3.05        | 3.49  | 3.92  | 4.39   | 0.7  | 3    | 17     |
| OS-19  | 0.22     | 0.65  | 1.22   | 1.67   | 2.23   | 2.59     | 0.09 | 300         | 10          | 21.2                  | 400         | 3.0%      | 1.9             | 3.6       | 24.8        | 2.21 | 2.77 | 3.23        | 3.69  | 4.15  | 4.64   | 0.5  | 2    | 12     |
| OS-20  | 0.75     | 2.26  | 4.27   | 6.53   | 7.78   | 9.04     | 0.09 | 300         | 16          | 16.2                  | 1300        | 3.0%      | 1.9             | 11.6      | 28.6        | 2.00 | 2.49 | 2.91        | 3.32  | 3.74  | 4.15   | 2    | 6    | 28     |
| A  | 0.83     | 1.93  | 3.17   | 4.28   | 4.97   | 5.52     | 0.14 | 300         | 10.5        | 19.9                  | 1280        | 3.2%      | 1.8             | 11.9      | 31.6        | 1.92 | 2.39 | 2.79        | 3.19  | 3.59  | 4.02   | 2    | 5    | 24     |
| B  | 0.46     | 1.08  | 1.77   | 2.39   | 2.77   | 3.08     | 0.14 | 300         | 10.5        | 19.9                  | 400         | 2.0%      | 1.4             | 4.7       | 24.6        | 2.23 | 2.78 | 3.24        | 3.71  | 4.17  | 4.67   | 1    | 3    | 16     |
| C  | 0.40     | 0.94  | 1.54   | 2.08   | 2.41   | 2.68     | 0.14 | 300         | 10.5        | 19.9                  | 1100        | 1.5%      | 2.4             | 7.5       | 27.3        | 2.10 | 2.62 | 3.06        | 3.49  | 3.93  | 4.40   | 1    | 2    | 12     |
| D  | 0.72     | 0.74  | 0.78   | 0.83   | 0.85   | 0.87     | 0.08 | 15          | 0.3         | 5.7                   | 1400        | 1.5%      | 2.4             | 9.5       | 15.2        | 2.80 | 3.00 | 4.00        | 4.67  | 5.25  | 5.88   | 2    | 3    | 5      |
| E  | 0.66     | 1.07  | 1.18   | 1.30   | 1.36   | 1.43     | 0.25 | 55          | 1.1         | 9.1                   | 900         | 2.5%      | 3.2             | 2.6       | 11.7        | 3.11 | 3.89 | 4.54        | 5.19  | 5.84  | 6.54   | 3    | 4    | 9      |
| F  | 0.19     | 0.45  | 0.74   | 0.99   | 1.15   | 1.28     | 0.14 | 300         | 10.5        | 19.9                  | 300         | 2.0%      | 1.4             | 3.5       | 23.4        | 2.28 | 2.85 | 3.33        | 3.81  | 4.29  | 4.79   | 0.4  | 1    | 6      |
| G  | 0.05     | 0.13  | 0.21   | 0.28   | 0.32   | 0.36     | 0.14 | 300         | 10.5        | 19.9                  |             |           |                 | 19.9      | 2.46        | 3.10 | 3.62 | 4.13        | 4.65  | 5.20  | 0.1    | 0.4  | 1.9  |        |
| H  | 0.14     | 0.58  | 1.08   | 1.80   | 2.16   | 2.52     | 0.08 | 70          | 14          | 5.7                   | 900         | 2.0%      | 1.4             | 10.6      | 16.3        | 2.71 | 3.39 | 3.96        | 4.52  | 5.09  | 5.70   | 0.4  | 2    | 14     |
| I  | 0.30     | 0.44  | 0.60   | 0.74   | 0.82   | 0.92     | 0.22 | 100         | 4           | 10.1                  | 300         | 3.0%      | 3.5             | 1.4       | 11.5        | 3.13 | 3.92 | 4.57        | 5.23  | 5.88  | 6.58   | 1    | 2    | 6      |
| J  | 0.67     | 0.93  | 1.18   | 1.44   | 1.59   | 1.74     | 0.25 | 120         | 3           | 12.4                  | 550         | 3.0%      | 3.7             | 2.4       | 14.9        | 2.82 | 3.43 | 4.12        | 4.71  | 5.30  | 5.93   | 2    | 3    | 10     |
| K  | 0.65     | 0.90  | 1.15   | 1.40   | 1.55   | 1.69     | 0.25 | 120         | 3           | 12.4                  | 600         | 2.0%      | 2.8             | 3.5       | 16.0        | 2.74 | 3.43 | 4.00        | 4.57  | 5.14  | 5.75   | 2    | 3    | 10     |
| L  | 0.27     | 0.38  | 0.48   | 0.59   | 0.65   | 0.71     | 0.25 | 55          | 1.1         | 9.1                   | 800         | 2.0%      | 2.8             | 3.5       | 12.6        | 3.02 | 3.78 | 4.41        | 5.05  | 5.68  | 6.35   | 0.8  | 1    | 4      |
| M  | 1.31     | 1.80  | 2.34   | 2.85   | 3.14   | 3.43     | 0.25 | 100         | 4.5         | 13.1                  | 800         | 2.5%      | 3.2             | 4.5       | 17.6        | 2.62 | 3.28 | 3.80        | 4.38  | 4.93  | 5.51   | 3    | 6    | 19     |
| N  | 0.41     | 0.59  | 0.81   | 1.00   | 1.11   | 1.24     | 0.22 | 100         | 4           | 10.1                  | 400         | 2.0%      | 2.8             | 2.4       | 12.4        | 3.04 | 3.80 | 4.44        | 5.07  | 5.71  | 6.39   | 1    | 2    | 6      |
| O  | 0.38     | 0.53  | 0.67   | 0.82   | 0.90   | 0.99     | 0.25 | 55          | 1.1         | 9.1                   | 1050        | 2.0%      | 2.8             | 6.2       | 15.2        | 2.79 | 3.00 | 4.06        | 4.66  | 5.25  | 5.87   | 1    | 2    | 6      |
| P  | 0.27     | 0.38  | 0.48   | 0.59   | 0.65   | 0.71     | 0.25 | 80          | 5           | 7.5                   | 75          | 3.64      | 4.56            | 5.32      | 6.08        | 6.84 | 7.66 | 8.48        | 9.31  | 10.14 | 1      | 2    | 5    |        |
| Q  | 0.49     | 0.68  | 0.86   | 1.05   | 1.16   | 1.27     | 0.25 | 120         | 3           | 12.4                  | 450         | 1.5%      | 2.4             | 3.1       | 15.5        | 2.77 | 3.47 | 4.05        | 4.63  | 5.21  | 5.83   | 1    | 2    | 7      |
| R  | 0.13     | 0.31  | 0.51   | 0.68   | 0.79   | 0.88     | 0.14 | 90</        |             |                       |             |           |                 |           |             |      |      |             |       |       |        |      |      |        |



**PRELIMINARY DRAINAGE REPORT AND MDDP ADDENDUM  
FOR  
HOMESTEAD NORTH AT STERLING RANCH PRELIMINARY PLAN**

**Prepared For:**

**SR Land, LLC  
20 Boulder Crescent, Suite 200  
Colorado Springs, CO 80903  
(719) 491-3024**

**April 1st, 2021  
Project No. 25188.00**

**Prepared By:**

**JR Engineering, LLC  
5475 Tech Center Drive, Suite 235  
Colorado Springs, CO 80919  
719-593-2593**

**PCD Filing No.:  
SP-20-008**

The Sand Creek is within the eastern portion of the site. Currently, JR Engineering is performing studies and plans to address Sand Creek stabilization.

There are no known irrigation facilities located on the project site.

## **FLOODPLAIN STATEMENT**

Based on the FEMA Firm Maps Number 08041C0533G and 08041C0535G revised December 7, 2018, the vast majority of the development is located within Zone X, or areas area outside the Special Flood Hazard Area (SFHA) and higher than the elevation of the 0.2-percent-annual-chance (or 500-year) flood. The eastern property boundary will be platted to the center of Sand creek placing a portion of the site within Zone AE. The area of disturbance for site grading is located outside of the delineated floodway within Zone X. The FEMA map containing the site has been presented in Appendix A.

## **EXISTING DRAINAGE CONDITIONS**

---

### **MAJOR BASIN DESCRIPTIONS**

The site lies within the Sand Creek Drainage Basin based on the “Sand Creek Drainage Basin Planning Study” (DBPS) completed by Kiowa Engineering Corporation in January 1993, revised March 1996. The Sand Creek Drainage Basin covers approximately 54 square miles and is divided into major sub-basins. The site is within the respective sub-basin is shown in Appendix E.

The Sand Creek DBPS assumed the Homestead North at Sterling Ranch property to have a "large lot residential" use for the majority of the site. However, the proposed Sterling Ranch master plan is a mix of; school, multi-family, single-family, and commercial land uses, resulting in higher runoff. The site generally drains from north to south consisting of rolling hills. Currently, the site is used as pasture land for cattle. Sand Creek is located in the east portion of the site running north to south. This reach of drainage conveyance is not currently improved. There are a few stock ponds within the creek channel used for cattle watering. Currently, JR engineering is performing studies and plans to address Sand Creek stabilization adjacent to the site.

The proposed drainage on the site closely follows the approved "Master Development Drainage Plan for Sterling Ranch", (MMDP) prepared by M&S Civil Consultants, Inc., dated October 24, 2018. The MMDP “Developed Hydrologic Conditions Map” as shown within Appendix E, shows the estimated detention for the site. The site is tributary to basins SC3-18, SC3-17, and a portion of basin SC-322. Full-spectrum detention in the MMDP was previously analyzed and corresponds to ponds FSD18 and FSD17 for the site. Pond FSD17 is associated with ponds A and B within this report. Pond FSD18 is associated with ponds B and C within this report. Runoff as shown in the proposed M&S conduit RT-10A will be detained within pond C, whereas the 2018 MDDP specified that this runoff outfall directly into Sand Creek. This represents a more conservative approach to attenuate and treat water



quality for the offsite runoff going into Sand Creek. The total estimated/projected detention and estimated outflows from the MDDP are shown in Table 1 on the following page.

**Table 1.**

| FSD17                   |      |      |      |       |       |       |
|-------------------------|------|------|------|-------|-------|-------|
| STORM EVENT (YR)        | 2    | 5    | 10   | 25    | 50    | 100   |
| PEAK INFLOW (CFS)       | 41.8 | 59.6 | 85.2 | 119.0 | 149.1 | 180.6 |
| ALLOWABLE RELEASE (CFS) | 0.7  | 11.1 | 22.5 | 52    | 67.2  | 86.3  |
| MODELED RELEASE (CFS)   | 0.7  | 8.4  | 22.4 | 52    | 67.2  | 86.1  |
| STORED VOLUME (AC-FT)   | 2.6  | 2.6  | 2.8  | 3.4   | 4.0   | 4.7   |

| FSD18                   |      |      |      |       |       |      |
|-------------------------|------|------|------|-------|-------|------|
| STORM EVENT (YR)        | 2    | 5    | 10   | 25    | 50    | 100  |
| PEAK INFLOW (CFS)       | 49.3 | 67.1 | 91.0 | 121.2 | 147.3 | 174  |
| ALLOWABLE RELEASE (CFS) | 0.6  | 9.2  | 18.4 | 42.2  | 54.6  | 69.9 |
| MODELED RELEASE (CFS)   | 0.6  | 6.3  | 18.4 | 42.2  | 54.6  | 69.6 |
| STORED VOLUME (AC-FT)   | 3.2  | 3.2  | 3.4  | 4.0   | 4.7   | 5.3  |

The MMDP plans for additional detention to the north of the site, as shown in Appendix E. No future offsite detention is necessary for the site.

In summary, the site will have three detention ponds A, B, and C. Ponds A and B associated with pond FSD17 of the M&S MDDP and Ponds B and C associated with pond FSD18. The release rates of these ponds will be below 90% of the historic drainage in continuity with the approved M&S MDDP. The report deviates with MDDP and detains and treats water quality from the existing offsite runoff from basin SC3-19 of the M&S MDDP via proposed storm pipe along Vollmer road and Briargate parkway that goes into pond C and outfalls within Sand Creek. The MDDP showed the runoff going into Sand Creek undetained. The total net detention being stored onsite in the 100 year event is 14.68 Acre-ft, as shown in Tables 2.1-2.3 of this report. The total runoff released from the detention ponds is 232.3 cfs in the 100 year event for the three ponds, as shown in Tables 2.1-2.3 of this report. The drainage for Vollmer and the corresponding offsite tributary area is detained treated for water quality within pond C.

**Pond A** has a total tributary area of 29.82 Acres, the net percent impervious area of pond A is 46.5%. Pond A has been conceptually graded in to fit the design volume, as shown in Appendix C of this report. This pond will be built in phase 2 of Homestead North at Sterling Ranch. Pond A will outfall directly into the Sand Creek basin. The WQCV, 5 year and 100 year volumes, releases rates and stages for pond A are shown in Table 2.1 below. These results correspond to the Routed Hydrograph results, as shown in Appendix C of this report.

| <b>TABLE 2.1 Pond A</b> |           |                |                    |
|-------------------------|-----------|----------------|--------------------|
|                         | Stage –ft | Volume (Acres) | Release Rate (cfs) |
| <b>WQCV</b>             | 2.81      | 0.498          | 0.2                |
| <b>5 Year</b>           | 5.44      | 1.726          | 4.3                |
| <b>100 Year</b>         | 6.73      | 2.477          | 36.2               |

**Basin B1.1** 3.36 acres 45% percent impervious is comprised of single-family residential lots, a local roads Billy Claiborne Drive, Perry Owens Drive and an urban knuckle. The runoff ( $Q_5=5.5$  cfs,  $Q_{100}=12.5$  cfs) from basin B1.1 drains to design point 1.1B.

**Basin B1.2** 1.81 acres and 54% percent impervious is comprised of single-family residential lots, a local roads Claiborne Drive, Perry Owens Drive and an urban knuckle. The runoff ( $Q_5=3.5$  cfs,  $Q_{100}=7.4$  cfs) from basin B1.2 drains to design point 1.2B.

**Basin B1.3** 0.47 acres and 47% percent impervious is comprised of single-family residential lots and a local roads Aspen Valley Road and Perry Owens Drive. The runoff ( $Q_5=1.0$  cfs,  $Q_{100}=2.2$  cfs) from basin B1.3 drains to design point 1.3B.

**Basin B2** 0.82 acres and 58% percent impervious is comprised of the northern portion of a local residential road Sam Bass Drive adjacent to the intersecting at Vollmer road. Runoff ( $Q_5=2.3$  cfs,  $Q_{100}=4.9$  cfs) from basin B2 drains to design point 2B and confluences with runoff from basins B1.1, B1.2 and B1.3.

**Basin B3** 0.24 acres and 79% percent impervious is comprised of the southern portion of a local residential road Sam Bass Drive adjacent to the intersection of Vollmer road. Runoff ( $Q_5=0.9$  cfs,  $Q_{100}=1.7$  cfs) from basin B3 drains to design point 3B.

**Pond B** has a tributary area 27.86 acres and is 50.0 % impervious. Pond B has been conceptually graded in to fit the design volume, as shown in Appendix C of this report. This pond will be built in phase 1 of Homestead North at Sterling Ranch. The pond B emergency overflow spillway will drain directly into Sand Creek. The WQCV, 5 year and 100 year volumes, releases rates and stages for pond B are shown in Table 2.2 below. These results correspond to the Routed Hydrograph results, as shown in Appendix C of this report.

| <b>TABLE 2.2 Pond B</b> |           |                |                    |
|-------------------------|-----------|----------------|--------------------|
|                         | Stage –ft | Volume (Acres) | Release Rate (cfs) |
| <b>WQCV</b>             | 3.13      | 0.483          | 0.2                |
| <b>5 Year</b>           | 4.34      | 1.701          | 3.4                |
| <b>100 Year</b>         | 5.09      | 3.019          | 25.4               |

**Basin C1** 2.82 acres and 69% percent impervious is comprised of single-family lots, and the northwestern side of the local residential roads Texas Jack Drive and Harvey Logan Drive. Runoff ( $Q_5=5.4$  cfs,  $Q_{100}=11.4$  cfs) from basin C1 drains to design point 1C at Wheatland Drive.

**Basin C2.1** 0.20 acres and 91% percent impervious is comprised of single-family lots, and the north western side of the residential road Texas Jack Drive. Runoff ( $Q_5=0.8$  cfs,  $Q_{100}=1.6$  cfs) from basin C2.1 drains to design point 2.1C a 5' on grade type R inlet.

**Basin C2.2** 4.69 acres and 73% percent impervious is comprised of local roads, single-family lots, and the north western side of the residential road Wheatland Drive. Runoff ( $Q_5=9.9$  cfs,  $Q_{100}=20.3$  cfs) from basin C2.2 drains to design point 2.2C in confluence with bypass runoff from basin C2.3. The runoff ultimately drains to design point 4C a 20' type R sump inlet. The total runoff from basins C1, C2.1, C2.2, C2.3 and C4.1 is collected within the sump inlet.

**Basin C2.3** 0.83 acres and 67% percent impervious is comprised of local roads Tom Ketchum Drive Jack Helm Drive and Harvey Logan Drive, single-family lots, and the north western side of the residential road Wheatland Drive. Runoff ( $Q_5=1.9$  cfs,  $Q_{100}=3.9$  cfs) from basin C2.3 drains to design point 2.3C in confluence with runoff from basin C1 at an on grade 15' Type R inlet.

**Basin C3.1** 0.35 acres and 73% percent impervious is comprised of single-family lots, and the southeastern side of the residential road Wheatland Drive. Runoff ( $Q_5=1.2$  cfs,  $Q_{100}=2.4$  cfs) from basin C3.1 drains to design point 3.1C.

**Basin C3.2** 1.46 acres and 71% percent impervious is comprised of local roads, single-family lots, and the southeastern side of the residential road Wheatland Drive and Tom Ketchum Drive. Runoff ( $Q_5=3.6$  cfs,  $Q_{100}=7.4$  cfs) from basin C3.2 drains to design point 3.2C.

**Basin C4.1** 6.35 acres and 65% percent impervious is comprised of single-family lots, and the northwestern side of the local residential road Texas Jack Drive, a right in lane and Nat Love Drive. Runoff ( $Q_5=12.1$  cfs,  $Q_{100}=25.9$  cfs) from basin C4.1 drains to design point 4C a 20' type R sump inlet. The total runoff from basins C1, C2.1, C2.2, C2.3 and C4.1 is collected within the sump inlet.

**Basin C4.2** 3.44 acres and 59% percent impervious is comprised of a local road Texas Jack Drive and single-family lots. Runoff ( $Q_5=5.9$  cfs,  $Q_{100}=13.3$  cfs) from basin C4.2 drains to design point 4.2C a 15' type R on grade inlet.

**Basin C5** 0.16 acres and 81% percent impervious is comprised of the northwestern side of a residential road Wheatland Drive. Runoff ( $Q_5=0.6$  cfs,  $Q_{100}=1.0$  cfs) from basin C5 drains to design point 5C, a 5' type R sump inlet. Basin C5 collects runoff from basin C3.2 and C5. The runoff from basin C ultimately outfalls into pond C. In the event the inlet clogs at Basin C5 the runoff will overflow to pond C. An overflow path has been graded to ensure that the overflow path will go into pond C.

**Basin C6** 2.48 acres and 21% percent impervious is comprised of pond C and some single-family residential area. Runoff ( $Q_5=2.5$  cfs,  $Q_{100}=8.8$  cfs) generated in Basin B11 sheet flows into Pond C where it is treated for water-quality and is detained up until the 100 year-event. The MHFD Detention sheet for pond C is shown in Appendix C of this report.

**Pond C** has a tributary area of 224.42 acres and is 10.3 % impervious. Pond C has been conceptually graded in to fit the design volume, as shown in Appendix C of this report. This pond will be built in phase 1 of Homestead North at Sterling Ranch. The Pond C overflow emergency spillway will overflow into Sand Creek. The WQCV, 5 year and 100 year volumes, releases rates and stages for pond C are shown in Table 2.3 below. These results correspond to the Routed Hydrograph results, as shown in Appendix C of this report.

| <b>TABLE 2.3 Pond C</b> |           |                |                    |
|-------------------------|-----------|----------------|--------------------|
|                         | Stage –ft | Volume (Acres) | Release Rate (cfs) |
| <b>WQCV</b>             | 3.32      | 1.288          | 0.7                |
| <b>5 Year</b>           | 6.22      | 4.310          | 20.6               |
| <b>100 Year</b>         | 9.94      | 9.263          | 173.9              |

## **Appendix C**

### **Hydraulic Calculations**




# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD- Detention, Version 4.03 (May 2020)

Project: Homestead North at Sterling Ranch

Basin ID: Pond A



### Watershed Information

|   |                |
|---|----------------|
| Selected BMP Type =                     | EDB            |
| Watershed Area =                        | 29.82 acres    |
| Watershed Length =                      | 1,963 ft       |
| Watershed Length to Centroid =          | 1,178 ft       |
| Watershed Slope =                       | 0.030 ft/ft    |
| Watershed Imperviousness =              | 46.50% percent |
| Percentage Hydrologic Soil Group A =    | 0.0% percent   |
| Percentage Hydrologic Soil Group B =    | 100.0% percent |
| Percentage Hydrologic Soil Groups C/D = | 0.0% percent   |
| Target WOCV Drain Time =                | 40.0 hours     |
| Location for 1-hr Rainfall Depths =     | User Input     |

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

|  |                 |
|--|-----------------|
| Water Quality Capture Volume (WOCV) =  | 0.489 acre-feet |
| Excess Urban Runoff Volume (EURV) =    | 1.474 acre-feet |
| 2-yr Runoff Volume (P1 = 1.19 in.) =   | 1.416 acre-feet |
| 5-yr Runoff Volume (P1 = 1.5 in.) =    | 2.052 acre-feet |
| 10-yr Runoff Volume (P1 = 1.75 in.) =  | 2.615 acre-feet |
| 25-yr Runoff Volume (P1 = 2 in.) =     | 3.389 acre-feet |
| 50-yr Runoff Volume (P1 = 2.25 in.) =  | 4.007 acre-feet |
| 100-yr Runoff Volume (P1 = 2.52 in.) = | 4.798 acre-feet |
| 500-yr Runoff Volume (P1 = 4 in.) =    | 8.639 acre-feet |
| Approximate 2-yr Detention Volume =    | 1.104 acre-feet |
| Approximate 5-yr Detention Volume =    | 1.522 acre-feet |
| Approximate 10-yr Detention Volume =   | 2.040 acre-feet |
| Approximate 25-yr Detention Volume =   | 2.247 acre-feet |
| Approximate 50-yr Detention Volume =   | 2.352 acre-feet |
| Approximate 100-yr Detention Volume =  | 2.648 acre-feet |

### Optional User Overrides

|  |             |
|--|-------------|
|  | 1.19 inches |
|  | 1.50 inches |
|  | 1.75 inches |
|  | 2.00 inches |
|  | 2.25 inches |
|  | 2.52 inches |
|  | 4.00 inches |



### Define Zones and Basin Geometry

|   |                         |
|---|-------------------------|
| Zone 1 Volume (WOCV) =                                  | 0.489 acre-feet         |
| Zone 2 Volume (EURV - Zone 1) =                         | 0.985 acre-feet         |
| Zone 3 Volume (100-year - Zones 1 & 2) =                | 1.174 acre-feet         |
| Total Detention Basin Volume =                          | 2.648 acre-feet         |
| Initial Surcharge Volume (ISV) =                        | 64 ft <sup>3</sup>      |
| Initial Surcharge Depth (ISD) =                         | 0.50 ft                 |
| Total Available Detention Depth (H <sub>total</sub> ) = | 7.00 ft                 |
| Depth of Trickle Channel (H <sub>TC</sub> ) =           | 0.50 ft                 |
| Slope of Trickle Channel (S <sub>TC</sub> ) =           | 0.005 ft/ft             |
| Slopes of Main Basin Sides (S <sub>main</sub> ) =       | 4 H:V                   |
| Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =       | 2                       |
| Initial Surcharge Area (A <sub>ISV</sub> ) =            | 128 ft <sup>2</sup>     |
| Surcharge Volume Length (L <sub>ISV</sub> ) =           | 11.3 ft                 |
| Surcharge Volume Width (W <sub>ISV</sub> ) =            | 11.3 ft                 |
| Depth of Basin Floor (H <sub>FLOOR</sub> ) =            | 0.78 ft                 |
| Length of Basin Floor (L <sub>FLOOR</sub> ) =           | 170.4 ft                |
| Width of Basin Floor (W <sub>FLOOR</sub> ) =            | 89.3 ft                 |
| Area of Basin Floor (A <sub>FLOOR</sub> ) =             | 15,221 ft <sup>2</sup>  |
| Volume of Basin Floor (V <sub>FLOOR</sub> ) =           | 4,353 ft <sup>3</sup>   |
| Depth of Main Basin (H <sub>MAIN</sub> ) =              | 5.22 ft                 |
| Length of Main Basin (L <sub>MAIN</sub> ) =             | 212.2 ft                |
| Width of Main Basin (W <sub>MAIN</sub> ) =              | 131.1 ft                |
| Area of Main Basin (A <sub>MAIN</sub> ) =               | 27,811 ft <sup>2</sup>  |
| Volume of Main Basin (V <sub>MAIN</sub> ) =             | 110,675 ft <sup>3</sup> |
| Calculated Total Basin Volume (V <sub>total</sub> ) =   | 2.644 acre-feet         |

| Depth Increment = 0.10 ft |      | Optional Override Stage (ft) | Length (ft) | Width (ft) | Area (ft <sup>2</sup> ) | Optional Override Area (ft <sup>2</sup> ) | Area (acre) | Volume (ft <sup>3</sup> ) | Volume (ac-ft) |
|---------------------------|------|------------------------------|-------------|------------|-------------------------|---|-------------|---------------------------|----------------|
| Top of Micropool          | 0.00 |                              | 11.3        | 11.3       | 128                     |   | 0.003       |                           |                |
| ISV                       | 0.50 |                              | 11.3        | 11.3       | 128                     |   | 0.003       | 64                        | 0.001          |
|                           | 0.60 |                              | 11.3        | 11.3       | 128                     |   | 0.003       | 77                        | 0.002          |
|                           | 0.70 |                              | 11.3        | 11.3       | 128                     |   | 0.003       | 90                        | 0.002          |
|                           | 0.80 |                              | 11.3        | 11.3       | 128                     |   | 0.003       | 102                       | 0.002          |
|                           | 0.90 |                              | 11.3        | 11.3       | 128                     |   | 0.003       | 115                       | 0.003          |
|                           | 1.00 |                              | 11.3        | 11.3       | 128                     |   | 0.003       | 128                       | 0.003          |
|                           | 1.10 |                              | 31.7        | 21.3       | 676                     |   | 0.016       | 165                       | 0.004          |
|                           | 1.20 |                              | 52.1        | 31.3       | 1,631                   |   | 0.037       | 277                       | 0.006          |
|                           | 1.30 |                              | 72.5        | 41.3       | 2,995                   |   | 0.069       | 505                       | 0.012          |
|                           | 1.40 |                              | 92.9        | 51.3       | 4,767                   |   | 0.109       | 889                       | 0.020          |
| 1.50                      |      | 113.3                        | 61.3        | 6,947      |                         | 0.159                                     | 1,472       | 0.034                     |                |
| 1.60                      |      | 133.7                        | 71.3        | 9,534      |                         | 0.219                                     | 2,292       | 0.053                     |                |
| 1.70                      |      | 154.1                        | 81.3        | 12,530     |                         | 0.288                                     | 3,392       | 0.078                     |                |
| Floor                     | 1.78 |                              | 170.4       | 89.3       | 15,221                  |   | 0.349       | 4,500                     | 0.103          |
|                           | 1.80 |                              | 170.6       | 89.5       | 15,262                  |   | 0.350       | 4,805                     | 0.110          |
|                           | 1.90 |                              | 171.4       | 90.3       | 15,471                  |   | 0.355       | 6,342                     | 0.146          |
|                           | 2.00 |                              | 172.2       | 91.1       | 15,681                  |   | 0.360       | 7,899                     | 0.181          |
|                           | 2.10 |                              | 173.0       | 91.9       | 15,892                  |   | 0.365       | 9,478                     | 0.218          |
|                           | 2.20 |                              | 173.8       | 92.7       | 16,105                  |   | 0.370       | 11,078                    | 0.254          |
|                           | 2.30 |                              | 174.6       | 93.5       | 16,318                  |   | 0.375       | 12,699                    | 0.292          |
|                           | 2.40 |                              | 175.4       | 94.3       | 16,534                  |   | 0.380       | 14,342                    | 0.329          |
|                           | 2.50 |                              | 176.2       | 95.1       | 16,750                  |   | 0.385       | 16,006                    | 0.367          |
|                           | 2.60 |                              | 177.0       | 95.9       | 16,968                  |   | 0.390       | 17,692                    | 0.406          |
| 2.70                      |      | 177.8                        | 96.7        | 17,186     |                         | 0.395                                     | 19,399      | 0.445                     |                |
| 2.80                      |      | 178.6                        | 97.5        | 17,407     |                         | 0.400                                     | 21,129      | 0.485                     |                |
| Zone 1 (WOCV)             | 2.82 |                              | 178.7       | 97.6       | 17,451                  |   | 0.401       | 21,477                    | 0.493          |
|                           | 2.90 |                              | 179.4       | 98.3       | 17,628                  |   | 0.405       | 22,881                    | 0.525          |
|                           | 3.00 |                              | 180.2       | 99.1       | 17,851                  |   | 0.410       | 24,655                    | 0.566          |
|                           | 3.10 |                              | 181.0       | 99.9       | 18,075                  |   | 0.415       | 26,451                    | 0.607          |
|                           | 3.20 |                              | 181.8       | 100.7      | 18,300                  |   | 0.420       | 28,270                    | 0.649          |
|                           | 3.30 |                              | 182.6       | 101.5      | 18,527                  |   | 0.425       | 30,111                    | 0.691          |
|                           | 3.40 |                              | 183.4       | 102.3      | 18,755                  |   | 0.431       | 31,975                    | 0.734          |
|                           | 3.50 |                              | 184.2       | 103.1      | 18,984                  |   | 0.436       | 33,862                    | 0.777          |
|                           | 3.60 |                              | 185.0       | 103.9      | 19,214                  |   | 0.441       | 35,772                    | 0.821          |
|                           | 3.70 |                              | 185.8       | 104.7      | 19,446                  |   | 0.446       | 37,705                    | 0.866          |
| 3.80                      |      | 186.6                        | 105.5       | 19,679     |                         | 0.452                                     | 39,661      | 0.910                     |                |
| 3.90                      |      | 187.4                        | 106.3       | 19,913     |                         | 0.457                                     | 41,641      | 0.956                     |                |
| 4.00                      |      | 188.2                        | 107.1       | 20,149     |                         | 0.463                                     | 43,644      | 1.002                     |                |
| 4.10                      |      | 189.0                        | 107.9       | 20,386     |                         | 0.468                                     | 45,671      | 1.048                     |                |
| 4.20                      |      | 189.8                        | 108.7       | 20,624     |                         | 0.473                                     | 47,721      | 1.096                     |                |
| 4.30                      |      | 190.6                        | 109.5       | 20,863     |                         | 0.479                                     | 49,795      | 1.143                     |                |
| 4.40                      |      | 191.4                        | 110.3       | 21,104     |                         | 0.484                                     | 51,894      | 1.191                     |                |
| 4.50                      |      | 192.2                        | 111.1       | 21,346     |                         | 0.490                                     | 54,016      | 1.240                     |                |
| 4.60                      |      | 193.0                        | 111.9       | 21,589     |                         | 0.496                                     | 56,163      | 1.289                     |                |
| 4.70                      |      | 193.8                        | 112.7       | 21,834     |                         | 0.501                                     | 58,334      | 1.339                     |                |
| 4.80                      |      | 194.6                        | 113.5       | 22,080     |                         | 0.507                                     | 60,530      | 1.390                     |                |
| 4.90                      |      | 195.4                        | 114.3       | 22,327     |                         | 0.513                                     | 62,750      | 1.441                     |                |
| 5.00                      |      | 195.9                        | 114.8       | 22,500     |                         | 0.517                                     | 64,319      | 1.477                     |                |
| Zone 2 (EURV)             | 5.07 |                              | 196.2       | 115.1      | 22,575                  |   | 0.518       | 64,995                    | 1.492          |
|                           | 5.10 |                              | 197.0       | 115.9      | 22,825                  |   | 0.524       | 67,265                    | 1.544          |
|                           | 5.20 |                              | 197.8       | 116.7      | 23,076                  |   | 0.530       | 69,560                    | 1.597          |
|                           | 5.30 |                              | 198.6       | 117.5      | 23,328                  |   | 0.536       | 71,880                    | 1.650          |
|                           | 5.40 |                              | 199.4       | 118.3      | 23,581                  |   | 0.541       | 74,226                    | 1.704          |
|                           | 5.50 |                              | 200.2       | 119.1      | 23,836                  |   | 0.547       | 76,597                    | 1.758          |
|                           | 5.60 |                              | 201.0       | 119.9      | 24,092                  |   | 0.553       | 78,993                    | 1.813          |
|                           | 5.70 |                              | 201.8       | 120.7      | 24,349                  |   | 0.559       | 81,415                    | 1.869          |
|                           | 5.80 |                              | 202.6       | 121.5      | 24,608                  |   | 0.565       | 83,863                    | 1.925          |
|                           | 5.90 |                              | 203.4       | 122.3      | 24,868                  |   | 0.571       | 86,337                    | 1.982          |
| 6.00                      |      | 204.2                        | 123.1       | 25,129     |                         | 0.577                                     | 88,837      | 2.039                     |                |
| 6.10                      |      | 205.0                        | 123.9       | 25,392     |                         | 0.583                                     | 91,363      | 2.097                     |                |
| 6.20                      |      | 205.8                        | 124.7       | 25,655     |                         | 0.589                                     | 93,915      | 2.156                     |                |
| 6.30                      |      | 206.6                        | 125.5       | 25,920     |                         | 0.595                                     | 96,494      | 2.215                     |                |
| 6.40                      |      | 207.4                        | 126.3       | 26,187     |                         | 0.601                                     | 99,099      | 2.275                     |                |
| 6.50                      |      | 208.2                        | 127.1       | 26,454     |                         | 0.607                                     | 101,731     | 2.335                     |                |
| 6.60                      |      | 209.0                        | 127.9       | 26,723     |                         | 0.613                                     | 104,390     | 2.396                     |                |
| 6.70                      |      | 209.8                        | 128.7       | 26,993     |                         | 0.620                                     | 107,076     | 2.458                     |                |
| 6.80                      |      | 210.6                        | 129.5       | 27,264     |                         | 0.626                                     | 109,788     | 2.520                     |                |
| 6.90                      |      | 211.4                        | 130.3       | 27,537     |                         | 0.632                                     | 112,529     | 2.583                     |                |
| 7.00                      |      | 212.2                        | 131.1       | 27,811     |                         | 0.638                                     | 115,299     | 2.647                     |                |
| 7.10                      |      | 213.0                        | 131.9       | 28,086     |                         | 0.639                                     | 118,097     | 2.653                     |                |
| Zone 3 (100-year)         | 7.10 |                              | 213.0       | 131.9      | 28,086                  |   | 0.645       | 118,091                   | 2.711          |
|                           | 7.20 |                              | 213.8       | 132.7      | 28,363                  |   | 0.651       | 120,913                   | 2.776          |
|                           | 7.30 |                              | 214.6       | 133.5      | 28,641                  |   | 0.657       | 123,763                   | 2.841          |
|                           | 7.40 |                              | 215.4       | 134.3      | 28,920                  |   | 0.664       | 126,641                   | 2.907          |
|                           | 7.50 |                              | 216.2       | 135.1      | 29,200                  |   | 0.670       | 129,547                   | 2.974          |
|                           | 7.60 |                              | 217.0       | 135.9      | 29,482                  |   | 0.677       | 132,482                   | 3.041          |
|                           | 7.70 |                              | 217.8       | 136.7      | 29,765                  |   | 0.683       | 135,444                   | 3.109          |
|                           | 7.80 |                              | 218.6       | 137.5      | 30,049                  |   | 0.690       | 138,435                   | 3.178          |
|                           | 7.90 |                              | 219.4       | 138.3      | 30,334                  |   | 0.696       | 141,454                   | 3.247          |
|                           | 8.00 |                              | 220.2       | 139.1      | 30,621                  |   | 0.703       | 144,501                   | 3.317          |
| 8.10                      |      | 221.0                        | 139.9       | 30,909     |                         | 0.710                                     | 147,578     | 3.388                     |                |
| 8.20                      |      | 221.8                        | 140.7       | 31,199     |                         | 0.716                                     | 150,683     | 3.459                     |                |
| 8.30                      |      | 222.6                        | 141.5       | 31,489     |                         | 0.723                                     | 153,818     | 3.531                     |                |
| 8.40                      |      | 223.4                        | 142.3       | 31,781     |                         | 0.730                                     | 156,981     | 3.604                     |                |
| 8.50                      |      | 224.2                        | 143.1       | 32,074     |                         | 0.736                                     | 160,174     | 3.677                     |                |
| 8.60                      |      | 225.0                        | 143.9       | 32,369     |                         | 0.743                                     | 163,396     | 3.751                     |                |
| 8.70                      |      | 225.8                        | 144.7       | 32,664     |                         | 0.750                                     | 166,648     | 3.826                     |                |
| 8.80                      |      | 226.6                        | 145.5       | 32,961     |                         | 0.757                                     | 169,929     | 3.901                     |                |
| 8.90                      |      | 227.4                        | 146.3       | 33,260     |                         | 0.764                                     | 173,240     | 3.977                     |                |
| 9.00                      |      | 228.2                        | 147.1       | 33,559     |                         | 0.770                                     | 176,581     | 4.054                     |                |
| 9.10                      |      | 229.0                        | 147.9       | 33,860     |                         | 0.777                                     | 179,952     | 4.131                     |                |
| 9.20                      |      | 229.8                        | 148.7       | 34,162     |                         | 0.784                                     | 183,353     | 4.209                     |                |
| 9.30                      |      | 230.6                        | 149.5       | 34,466     |                         | 0.791                                     | 186,784     | 4.288                     |                |
| 9.40                      |      | 231.4                        | 150.3       | 34,770     |                         | 0.798                                     | 190,246     | 4.367                     |                |
| 9.50                      |      | 232.2                        | 151.1       | 35,076     |                         | 0.805                                     | 193,738     | 4.448                     |                |
| 9.60                      |      | 233.0                        | 151.9       | 35,383     |                         | 0.812                                     | 197,261     | 4.529                     |                |
| 9.70                      |      | 233.8                        | 152.7       | 35,692     |                         | 0.819                                     | 200,815     | 4.610                     |                |
| 9.80                      |      | 234.6                        | 153.5       | 36,002     |                         | 0.826                                     | 204,400     | 4.692                     |                |

# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

*MHFD-Detention, Version 4.03 (May 2020)*

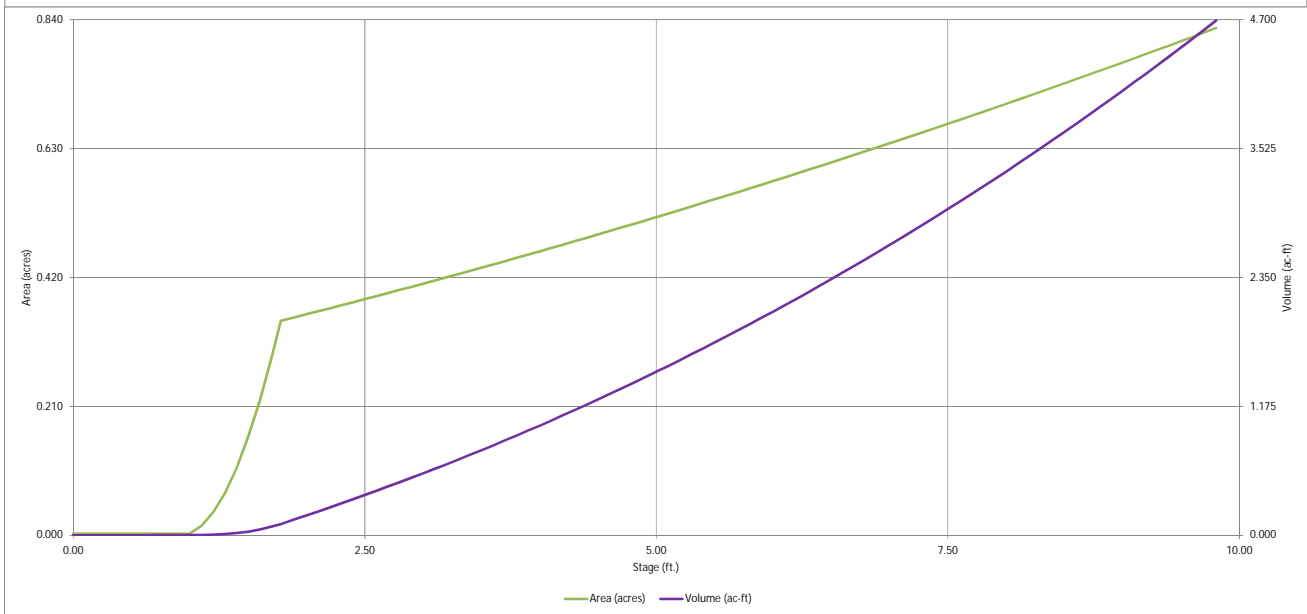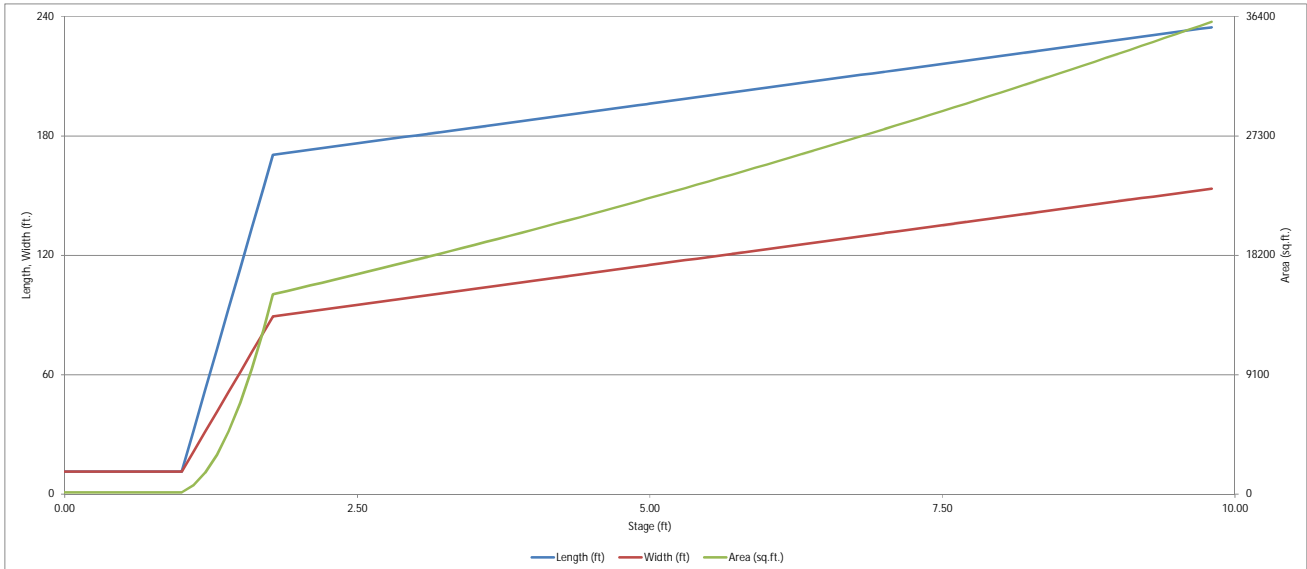


# DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.03 (May 2020)

Project: Homestead North at Sterling Ranch

Basin ID: Pond A

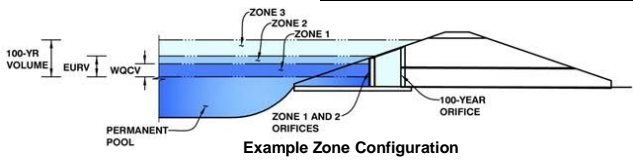

|                   | Estimated Stage (ft) | Estimated Volume (ac-ft) | Outlet Type          |
|-------------------|----------------------|--------------------------|----------------------|
| V)                | 2.82                 | 0.489                    | Orifice Plate        |
| V)                | 4.97                 | 0.985                    | Orifice Plate        |
| W)                | 7.01                 | 1.174                    | Weir&Pipe (Restrict) |
| Total (all zones) |                      | 2.648                    |                      |

User Input: Orifice at Underdrain Outlet (typically used to drain WOCV in a Filtration BMP)

|                                   |     |  |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter =     | N/A | inches   |

Calculated Parameters for Underdrain

|                               |     |                 |
|-------------------------------|-----|-----------------|
| Underdrain Orifice Area =     | N/A | ft <sup>2</sup> |
| Underdrain Orifice Centroid = | N/A | feet            |

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WOCV and/or EURV in a sedimentation BMP)

|  |      |   |
|--|------|---|
| Invert of Lowest Orifice =                 | 0.00 | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 4.97 | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing =  | N/A  | inches  |
| Orifice Plate: Orifice Area per Row =      | N/A  | inches  |

Calculated Parameters for Plate

|                            |     |                 |
|----------------------------|-----|-----------------|
| WO Orifice Area per Row =  | N/A | ft <sup>2</sup> |
| Elliptical Half-Width =    | N/A | feet            |
| Elliptical Slot Centroid = | N/A | feet            |
| Elliptical Slot Area =     | N/A | ft <sup>2</sup> |

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.66             | 3.31             | 2.85             |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 2.23             | 2.23             | 2.23             | 2.25             |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

User Input: Vertical Orifice (Circular or Rectangular)

|   | Not Selected | Not Selected |   |
|---|--------------|--------------|---|
| Invert of Vertical Orifice =                  | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | N/A          | N/A          | inches  |

Calculated Parameters for Vertical Orifice

|                             | Not Selected | Not Selected |                 |
|-----------------------------|--------------|--------------|-----------------|
| Vertical Orifice Area =     | N/A          | N/A          | ft <sup>2</sup> |
| Vertical Orifice Centroid = | N/A          | N/A          | feet            |

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))

|                                       | Zone 3 Weir | Not Selected |   |
|---------------------------------------|-------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 4.97        | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 5.00        | N/A          | feet  |
| Overflow Weir Grate Slope =           | 4.00        | N/A          | H:V   |
| Horiz. Length of Weir Sides =         | 5.00        | N/A          | feet  |
| Overflow Grate Open Area % =          | 75%         | N/A          | % , grate open area/total area                |
| Debris Clogging % =                   | 50%         | N/A          | %   |

Calculated Parameters for Overflow Weir

|  | Zone 3 Weir | Not Selected |                 |
|--|-------------|--------------|-----------------|
| Height of Grate Upper Edge, H <sub>1</sub> = | 6.22        | N/A          | feet            |
| Overflow Weir Slope Length =                 | 5.15        | N/A          | feet            |
| Grate Open Area / 100-yr Orifice Area =      | 6.15        | N/A          |                 |
| Overflow Grate Open Area w/o Debris =        | 19.33       | N/A          | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | 9.66        | N/A          | ft <sup>2</sup> |

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

|   | Zone 3 Restrictor | Not Selected |  |
|---|-------------------|--------------|--|
| Depth to Invert of Outlet Pipe =            | 0.00              | N/A          | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 24.00             | N/A          | inches   |
| Restrictor Plate Height Above Pipe Invert = | 24.00             |              | inches   |

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

|  | Zone 3 Restrictor | Not Selected |                 |
|--|-------------------|--------------|-----------------|
| Outlet Orifice Area =                            | 3.14              | N/A          | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | 1.00              | N/A          | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | 3.14              | N/A          | radians         |

User Input: Emergency Spillway (Rectangular or Trapezoidal)

|                                     |       |   |
|-------------------------------------|-------|---|
| Spillway Invert Stage =             | 7.00  | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length =             | 23.00 | feet  |
| Spillway End Slopes =               | 4.00  | H:V   |
| Freeboard above Max Water Surface = | 1.00  | feet  |

Calculated Parameters for Spillway

|                                    |      |         |
|------------------------------------|------|---------|
| Spillway Design Flow Depth =       | 0.91 | feet    |
| Stage at Top of Freeboard =        | 8.91 | feet    |
| Basin Area at Top of Freeboard =   | 0.76 | acres   |
| Basin Volume at Top of Freeboard = | 3.98 | acre-ft |




## Routed Hydrograph Results

*The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).*

|   | WOCV  | EURV          | 2 Year | 5 Year          | 10 Year         | 25 Year         | 50 Year         | 100 Year       | 500 Year |
|---|-------|---------------|--------|-----------------|-----------------|-----------------|-----------------|----------------|----------|
| Design Storm Return Period =                    |       |               |        |                 |                 |                 |                 |                |          |
| One-Hour Rainfall Depth (in) =                  | N/A   | N/A           | 1.19   | 1.50            | 1.75            | 2.00            | 2.25            | 2.52           | 4.00     |
| CUHP Runoff Volume (acre-ft) =                  | 0.489 | 1.474         | 1.416  | 2.052           | 2.615           | 3.389           | 4.007           | 4.798          | 8.639    |
| Inflow Hydrograph Volume (acre-ft) =            | N/A   | N/A           | 1.416  | 2.052           | 2.615           | 3.389           | 4.007           | 4.798          | 8.639    |
| CUHP Predevelopment Peak Q (cfs) =              | N/A   | N/A           | 2.7    | 7.7             | 11.7            | 21.0            | 26.4            | 33.9           | 66.6     |
| OPTIONAL Override Predevelopment Peak Q (cfs) = | N/A   | N/A           |        |                 |                 |                 |                 |                |          |
| Predevelopment Unit Peak Flow, q (cfs/acre) =   | N/A   | N/A           | 0.09   | 0.26            | 0.39            | 0.71            | 0.89            | 1.14           | 2.23     |
| Peak Inflow Q (cfs) =                           | N/A   | N/A           | 18.8   | 27.8            | 34.7            | 47.3            | 55.8            | 66.4           | 116.7    |
| Peak Outflow Q (cfs) =                          | 0.2   | 0.5           | 0.5    | 4.3             | 10.0            | 20.1            | 28.0            | 36.2           | 91.0     |
| Ratio Peak Outflow to Predevelopment Q =        | N/A   | N/A           | N/A    | 0.6             | 0.9             | 1.0             | 1.1             | 1.1            | 1.4      |
| Structure Controlling Flow =                    | Plate | Overflow Weir | Plate  | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Outlet Plate 1 | Spillway |
| Max Velocity through Gate 1 (fps) =             | N/A   | N/A           | N/A    | 0.2             | 0.5             | 1.0             | 1.4             | 1.8            | 2.0      |
| Max Velocity through Gate 2 (fps) =             | N/A   | N/A           | N/A    | N/A             | N/A             | N/A             | N/A             | N/A            | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =    | 39    | 68            | 67     | 70              | 68              | 66              | 64              | 62             | 53       |
| Time to Drain 99% of Inflow Volume (hours) =    | 40    | 72            | 71     | 75              | 75              | 74              | 73              | 72             | 68       |
| Maximum Ponding Depth (ft) =                    | 2.81  | 4.97          | 4.69   | 5.44            | 5.76            | 6.13            | 6.37            | 6.73           | 7.77     |
| Area at Maximum Ponding Depth (acres) =         | 0.40  | 0.52          | 0.50   | 0.54            | 0.56            | 0.58            | 0.60            | 0.62           | 0.69     |
| Maximum Volume Stored (acre-ft) =               | 0.489 | 1.477         | 1.329  | 1.726           | 1.903           | 2.115           | 2.251           | 2.477          | 3.157    |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-*Detention*, Version 4.00 (December 2019)

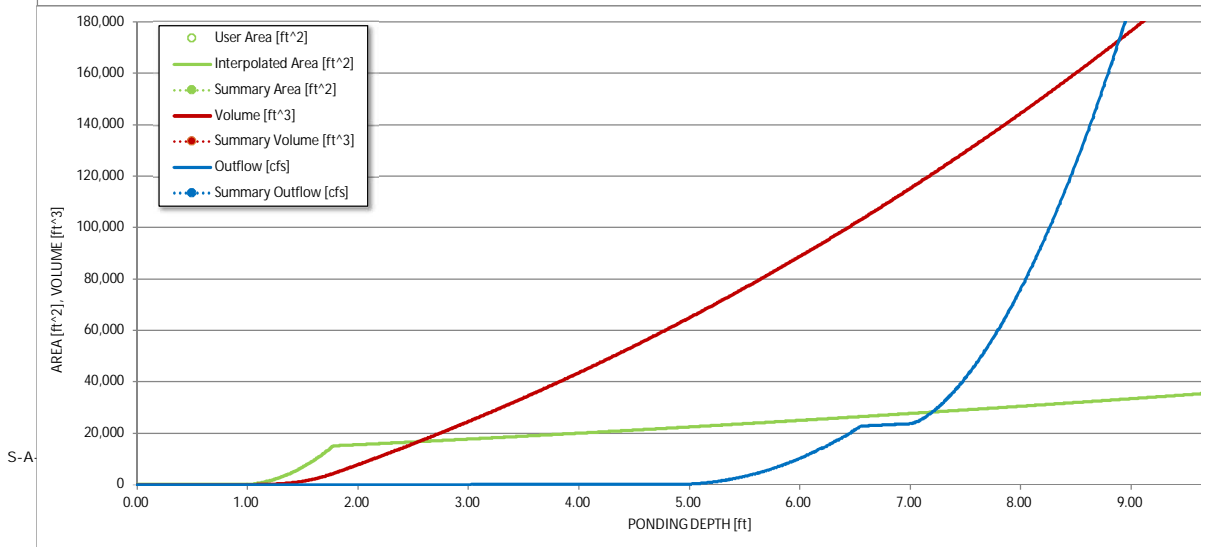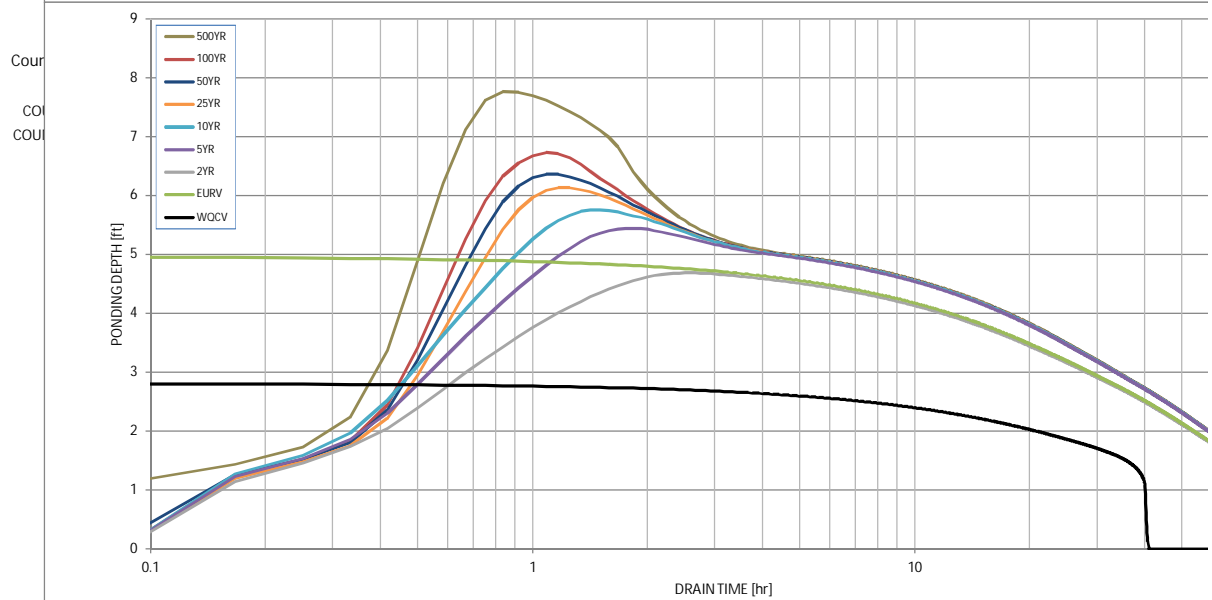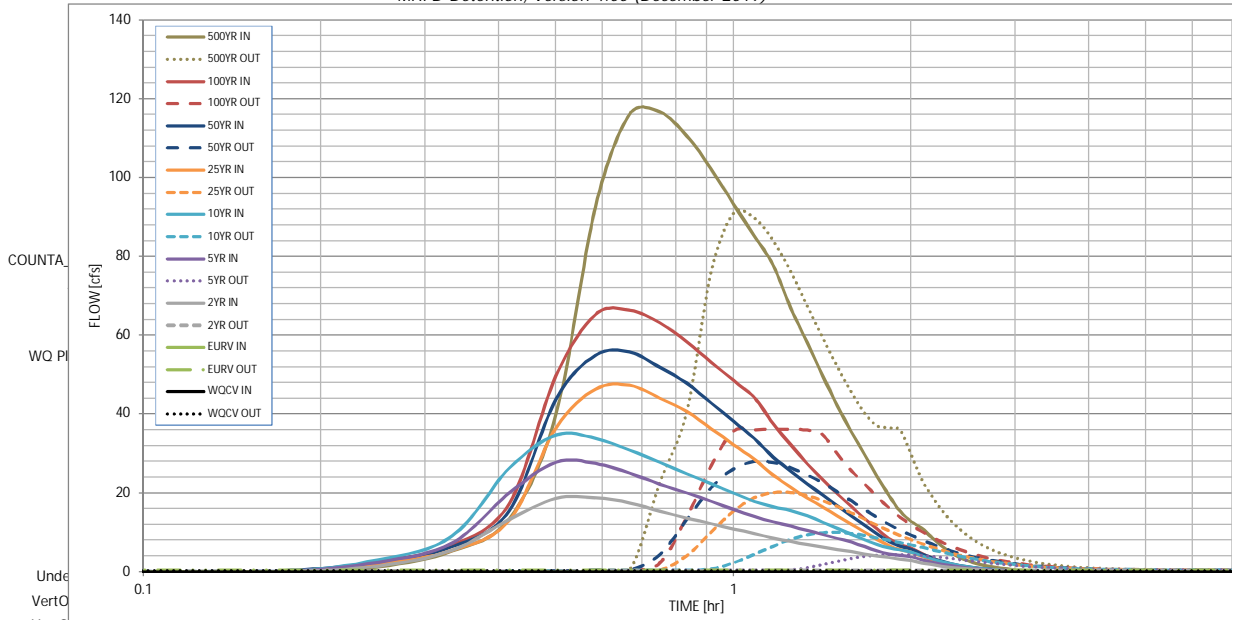




| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound               |        |             |              |
| maximum bound               |        |             |              |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: \_\_\_\_\_

## Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.



| SOURCE  | CUHP       | CUHP       | CUHP         | CUHP         | CUHP          | CUHP          | CUHP          | CUHP           | CUHP           |
|---------|------------|------------|--------------|--------------|---------------|---------------|---------------|----------------|----------------|
| TIME    | WQCV [cfs] | EURV [cfs] | 2 Year [cfs] | 5 Year [cfs] | 10 Year [cfs] | 25 Year [cfs] | 50 Year [cfs] | 100 Year [cfs] | 500 Year [cfs] |
| 0:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 0:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 0:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.17          | 0.02           | 1.28           |
| 0:15:00 | 0.00       | 0.00       | 1.48         | 2.42         | 3.01          | 2.02          | 2.55          | 2.47           | 5.23           |
| 0:20:00 | 0.00       | 0.00       | 5.46         | 7.28         | 9.08          | 5.44          | 6.37          | 6.79           | 13.47          |
| 0:25:00 | 0.00       | 0.00       | 13.26        | 20.00        | 26.25         | 13.07         | 15.51         | 17.30          | 39.87          |
| 0:30:00 | 0.00       | 0.00       | 18.64        | 27.81        | 34.70         | 36.50         | 43.76         | 49.67          | 92.54          |
| 0:35:00 | 0.00       | 0.00       | 18.84        | 27.50        | 33.88         | 46.32         | 54.94         | 65.27          | 116.18         |
| 0:40:00 | 0.00       | 0.00       | 17.48        | 25.05        | 30.89         | 47.34         | 55.80         | 66.36          | 116.74         |
| 0:45:00 | 0.00       | 0.00       | 15.41        | 22.23        | 27.77         | 44.07         | 51.90         | 63.18          | 110.64         |
| 0:50:00 | 0.00       | 0.00       | 13.65        | 20.02        | 24.87         | 40.68         | 47.87         | 58.32          | 102.22         |
| 0:55:00 | 0.00       | 0.00       | 12.20        | 17.87        | 22.33         | 36.32         | 42.84         | 53.15          | 93.36          |
| 1:00:00 | 0.00       | 0.00       | 10.89        | 15.84        | 20.00         | 32.25         | 38.13         | 48.55          | 85.33          |
| 1:05:00 | 0.00       | 0.00       | 9.73         | 14.02        | 17.90         | 28.63         | 33.91         | 44.30          | 77.86          |
| 1:10:00 | 0.00       | 0.00       | 8.56         | 12.70        | 16.49         | 24.54         | 29.11         | 37.62          | 66.92          |
| 1:15:00 | 0.00       | 0.00       | 7.67         | 11.59        | 15.56         | 21.47         | 25.57         | 32.21          | 58.18          |
| 1:20:00 | 0.00       | 0.00       | 6.95         | 10.48        | 14.22         | 18.76         | 22.34         | 27.44          | 49.66          |
| 1:25:00 | 0.00       | 0.00       | 6.31         | 9.45         | 12.56         | 16.43         | 19.53         | 23.32          | 42.12          |
| 1:30:00 | 0.00       | 0.00       | 5.70         | 8.46         | 10.98         | 14.14         | 16.76         | 19.78          | 35.62          |
| 1:35:00 | 0.00       | 0.00       | 5.10         | 7.52         | 9.50          | 12.02         | 14.19         | 16.55          | 29.71          |
| 1:40:00 | 0.00       | 0.00       | 4.51         | 6.39         | 8.14          | 10.05         | 11.83         | 13.58          | 24.30          |
| 1:45:00 | 0.00       | 0.00       | 3.98         | 5.33         | 6.96          | 8.24          | 9.65          | 10.86          | 19.38          |
| 1:50:00 | 0.00       | 0.00       | 3.60         | 4.56         | 6.12          | 6.66          | 7.76          | 8.55           | 15.38          |
| 1:55:00 | 0.00       | 0.00       | 3.15         | 4.10         | 5.54          | 5.57          | 6.48          | 6.95           | 12.76          |
| 2:00:00 | 0.00       | 0.00       | 2.80         | 3.76         | 5.01          | 4.93          | 5.72          | 5.97           | 11.11          |
| 2:05:00 | 0.00       | 0.00       | 2.29         | 3.08         | 4.10          | 3.92          | 4.55          | 4.66           | 8.72           |
| 2:10:00 | 0.00       | 0.00       | 1.83         | 2.45         | 3.27          | 3.04          | 3.52          | 3.52           | 6.61           |
| 2:15:00 | 0.00       | 0.00       | 1.46         | 1.94         | 2.59          | 2.36          | 2.73          | 2.65           | 4.99           |
| 2:20:00 | 0.00       | 0.00       | 1.15         | 1.53         | 2.03          | 1.83          | 2.11          | 1.97           | 3.71           |
| 2:25:00 | 0.00       | 0.00       | 0.91         | 1.20         | 1.57          | 1.41          | 1.62          | 1.47           | 2.77           |
| 2:30:00 | 0.00       | 0.00       | 0.71         | 0.93         | 1.20          | 1.08          | 1.23          | 1.12           | 2.09           |
| 2:35:00 | 0.00       | 0.00       | 0.56         | 0.71         | 0.91          | 0.82          | 0.93          | 0.85           | 1.58           |
| 2:40:00 | 0.00       | 0.00       | 0.43         | 0.54         | 0.69          | 0.62          | 0.71          | 0.65           | 1.21           |
| 2:45:00 | 0.00       | 0.00       | 0.33         | 0.41         | 0.53          | 0.48          | 0.54          | 0.51           | 0.94           |
| 2:50:00 | 0.00       | 0.00       | 0.24         | 0.30         | 0.40          | 0.36          | 0.41          | 0.39           | 0.71           |
| 2:55:00 | 0.00       | 0.00       | 0.17         | 0.21         | 0.29          | 0.27          | 0.30          | 0.28           | 0.52           |
| 3:00:00 | 0.00       | 0.00       | 0.11         | 0.15         | 0.19          | 0.18          | 0.21          | 0.19           | 0.35           |
| 3:05:00 | 0.00       | 0.00       | 0.07         | 0.09         | 0.12          | 0.12          | 0.13          | 0.12           | 0.22           |
| 3:10:00 | 0.00       | 0.00       | 0.04         | 0.05         | 0.06          | 0.06          | 0.07          | 0.07           | 0.11           |
| 3:15:00 | 0.00       | 0.00       | 0.01         | 0.02         | 0.03          | 0.03          | 0.03          | 0.03           | 0.04           |
| 3:20:00 | 0.00       | 0.00       | 0.00         | 0.01         | 0.01          | 0.01          | 0.01          | 0.01           | 0.01           |
| 3:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 3:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 3:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 3:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 3:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 3:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 3:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:15:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:20:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 4:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:15:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:20:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 5:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
| 6:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |









# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

*MHFD-Detention, Version 4.03 (May 2020)*

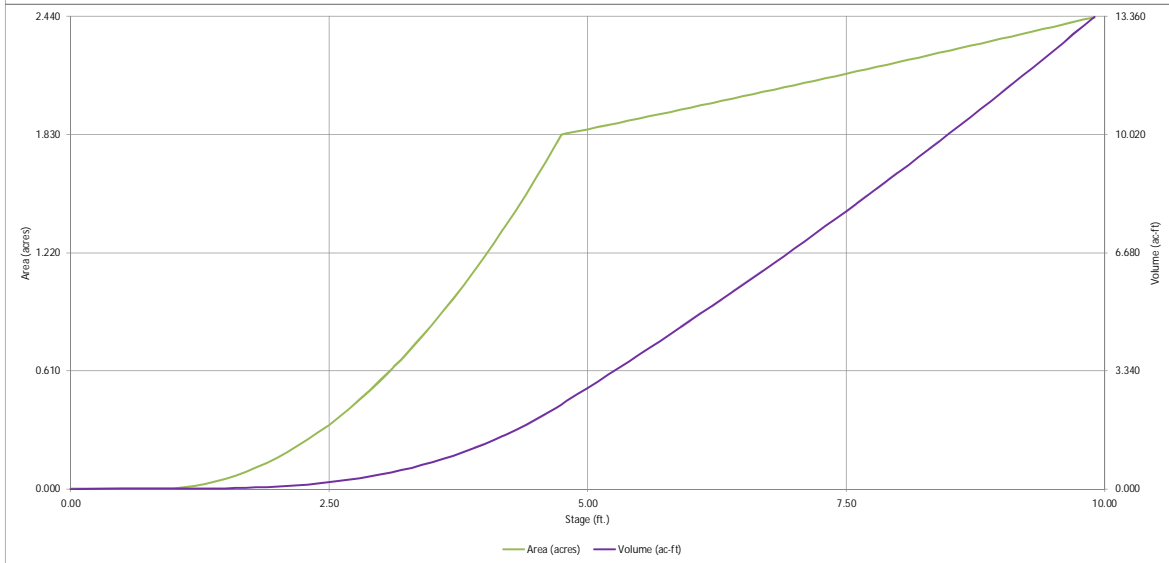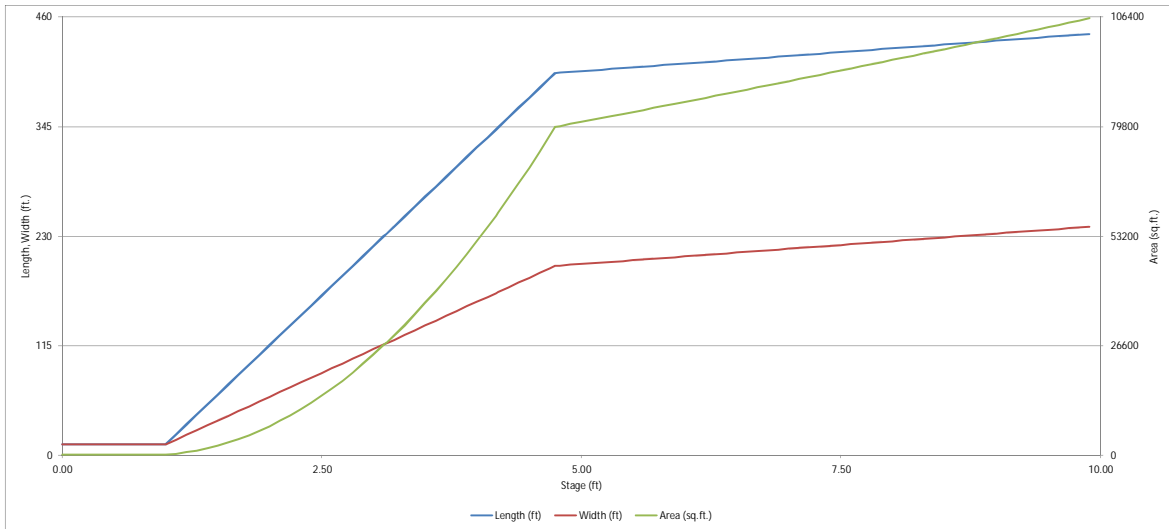


# DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-*Detention, Version 4.03 (May 2020)*

Project: Homestead North at Sterling Ranch

Basin ID: Pond B

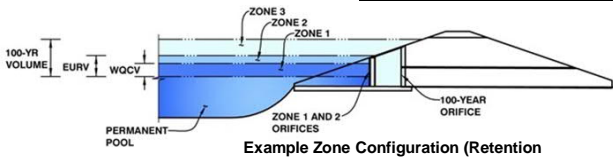

|                   | Estimated Stage (ft) | Estimated Volume (ac-ft) | Outlet Type          |
|-------------------|----------------------|--------------------------|----------------------|
| e 1 (WQCV)        | 3.13                 | 0.479                    | Orifice Plate        |
| e 2 (EURV)        | 4.18                 | 1.010                    | Orifice Plate        |
| -1/2WQCV          | 5.00                 | 1.356                    | Weir&Pipe (Restrict) |
| Total (all zones) |                      | 2.845                    |                      |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

|                                   |     |  |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter =     | N/A | inches   |

|                                      |                     |
|--------------------------------------|---------------------|
| Calculated Parameters for Underdrain |                     |
| Underdrain Orifice Area =            | N/A ft <sup>2</sup> |
| Underdrain Orifice Centroid =        | N/A feet            |

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

|  |      |   |
|--|------|---|
| Invert of Lowest Orifice =                 | 0.00 | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 4.11 | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing =  | N/A  | inches  |
| Orifice Plate: Orifice Area per Row =      | N/A  | inches  |

|                                 |                     |
|---------------------------------|---------------------|
| Calculated Parameters for Plate |                     |
| WQ Orifice Area per Row =       | N/A ft <sup>2</sup> |
| Elliptical Half-Width =         | N/A feet            |
| Elliptical Slot Centroid =      | N/A feet            |
| Elliptical Slot Area =          | N/A ft <sup>2</sup> |

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.37             | 2.74             | 3.20             |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 1.60             | 1.60             | 1.60             | 9.00             |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

User Input: Vertical Orifice (Circular or Rectangular)

|   |              |              |   |
|---|--------------|--------------|---|
|   | Not Selected | Not Selected |   |
| Invert of Vertical Orifice =                  |              | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A          | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   |              | N/A          | inches  |

|  |                     |
|--|---------------------|
| Calculated Parameters for Vertical Orifice |                     |
| Vertical Orifice Area =                    | N/A ft <sup>2</sup> |
| Vertical Orifice Centroid =                | N/A feet            |

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))

|                                       | Zone 3 Weir | Not Selected |   |
|---------------------------------------|-------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 4.11        | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 5.00        | N/A          | feet  |
| Overflow Weir Grate Slope =           | 0.00        | N/A          | H:V   |
| Horiz. Length of Weir Sides =         | 5.00        | N/A          | feet  |
| Overflow Grate Open Area % =          | 70%         | N/A          | %, grate open area/total area                 |
| Debris Clogging % =                   | 70%         | N/A          | %   |

|  |                       |
|--|-----------------------|
| Calculated Parameters for Overflow Weir      |                       |
| Height of Grate Upper Edge, H <sub>1</sub> = | 4.11 feet             |
| Overflow Weir Slope Length =                 | 5.00 feet             |
| Grate Open Area / 100-yr Orifice Area =      | 5.76                  |
| Overflow Grate Open Area w/o Debris =        | 17.50 ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | 5.25 ft <sup>2</sup>  |

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

|   |                  |              |  |
|---|------------------|--------------|--|
|   | one 3 Restrictor | Not Selected |  |
| Depth to Invert of Outlet Pipe =            | 0.25             | N/A          | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 33.00            | N/A          | inches   |
| Restrictor Plate Height Above Pipe Invert = | 16.80            |              | inches   |

|   |                      |
|---|----------------------|
| Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate |                      |
| Outlet Orifice Area =   | 3.04 ft <sup>2</sup> |
| Outlet Orifice Centroid =                                       | 0.80 feet            |
| Half-Central Angle of Restrictor Plate on Pipe =                | 1.59 radians         |

User Input: Emergency Spillway (Rectangular or Trapezoidal)

|                                     |       |   |
|-------------------------------------|-------|---|
| Spillway Invert Stage =             | 5.16  | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length =             | 23.00 | feet  |
| Spillway End Slopes =               | 4.00  | H:V   |
| Freeboard above Max Water Surface = | 1.00  | feet  |

|                                    |              |
|------------------------------------|--------------|
| Calculated Parameters for Spillway |              |
| Spillway Design Flow Depth =       | 0.91 feet    |
| Stage at Top of Freeboard =        | 7.07 feet    |
| Basin Area at Top of Freeboard =   | 2.09 acres   |
| Basin Volume at Top of Freeboard = | 6.94 acre-ft |




## Routed Hydrograph Results

*The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).*

|   | WQCV  | EURV            | 2 Year | 5 Year        | 10 Year         | 25 Year         | 50 Year         | 100 Year      | 500 Year |
|---|-------|-----------------|--------|---------------|-----------------|-----------------|-----------------|---------------|----------|
| Design Storm Return Period                    |       |                 |        |               |                 |                 |                 |               |          |
| One-Hour Rainfall Depth (in)                  | N/A   | N/A             | 1.19   | 1.50          | 1.75            | 2.00            | 2.25            | 2.52          | 4.00     |
| CUHP Runoff Volume (acre-ft)                  | 0.479 | 1.489           | 1.408  | 2.012         | 2.543           | 3.255           | 3.834           | 4.566         | 8.151    |
| Inflow Hydrograph Volume (acre-ft)            | N/A   | N/A             | 1.408  | 2.012         | 2.543           | 3.255           | 3.834           | 4.566         | 8.151    |
| CUHP Predevelopment Peak Q (cfs)              | N/A   | N/A             | 3.2    | 9.1           | 13.8            | 24.2            | 30.4            | 38.6          | 75.6     |
| OPTIONAL Override Predevelopment Peak Q (cfs) | N/A   | N/A             |        |               |                 |                 |                 |               |          |
| Predevelopment Unit Peak Flow, q (cfs/acre)   | N/A   | N/A             | 0.12   | 0.33          | 0.49            | 0.87            | 1.09            | 1.39          | 2.71     |
| Peak Inflow Q (cfs)                           | N/A   | N/A             | 23.9   | 34.9          | 42.9            | 56.2            | 66.2            | 79.0          | 137.9    |
| Peak Outflow Q (cfs)                          | 0.2   | 1.0             | 0.5    | 3.4           | 6.8             | 13.4            | 18.2            | 25.4          | 67.6     |
| Ratio Peak Outflow to Predevelopment Q        | N/A   | N/A             | N/A    | 0.4           | 0.5             | 0.6             | 0.6             | 0.7           | 0.9      |
| Structure Controlling Flow                    | Plate | Overflow Weir 1 | Plate  | overflow Weir | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | overflow Weir | Spillway |
| Max Velocity through Gate 1 (fps)             | N/A   | 0.03            | N/A    | 0.2           | 0.4             | 0.7             | 1.0             | 1.4           | 1.9      |
| Max Velocity through Gate 2 (fps)             | N/A   | N/A             | N/A    | N/A           | N/A             | N/A             | N/A             | N/A           | N/A      |
| Time to Drain 97% of Inflow Volume (hours)    | 38    | 64              | 63     | 66            | 65              | 63              | 61              | 59            | 51       |
| Time to Drain 99% of Inflow Volume (hours)    | 40    | 67              | 67     | 70            | 70              | 70              | 69              | 68            | 65       |
| Maximum Ponding Depth (ft)                    | 3.13  | 4.18            | 4.05   | 4.34          | 4.50            | 4.73            | 4.88            | 5.09          | 5.75     |
| Area at Maximum Ponding Depth (acres)         | 0.63  | 1.34            | 1.23   | 1.46          | 1.59            | 1.81            | 1.87            | 1.87          | 1.94     |
| Maximum Volume Stored (acre-ft)               | 0.483 | 1.492           | 1.312  | 1.701         | 1.945           | 2.354           | 2.629           | 3.019         | 4.276    |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-*Detention*, Version 4.00 (December 2019)

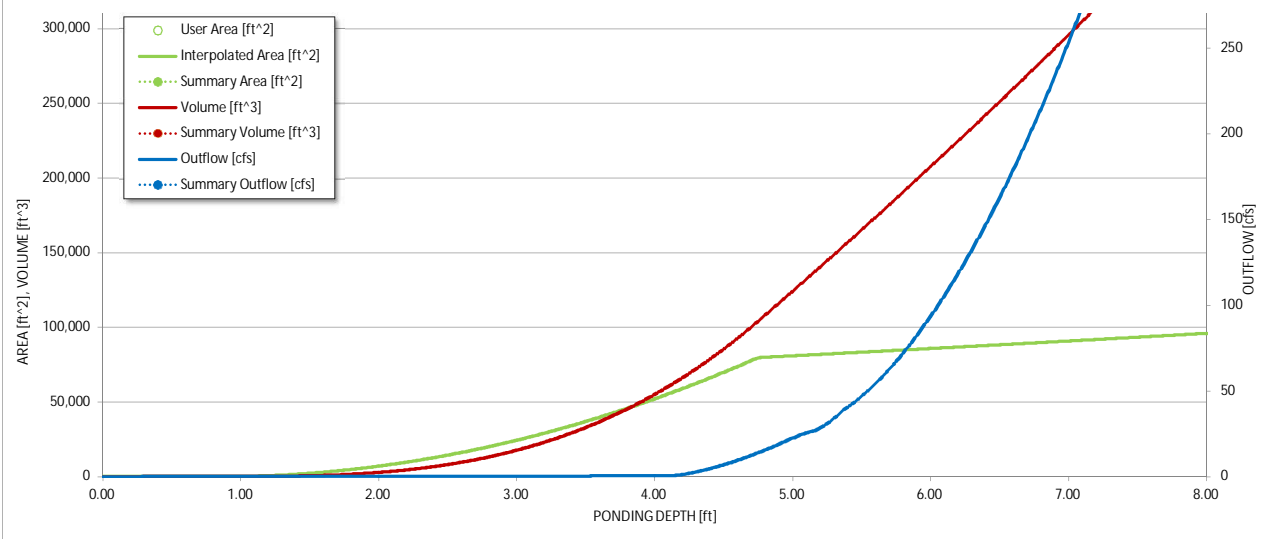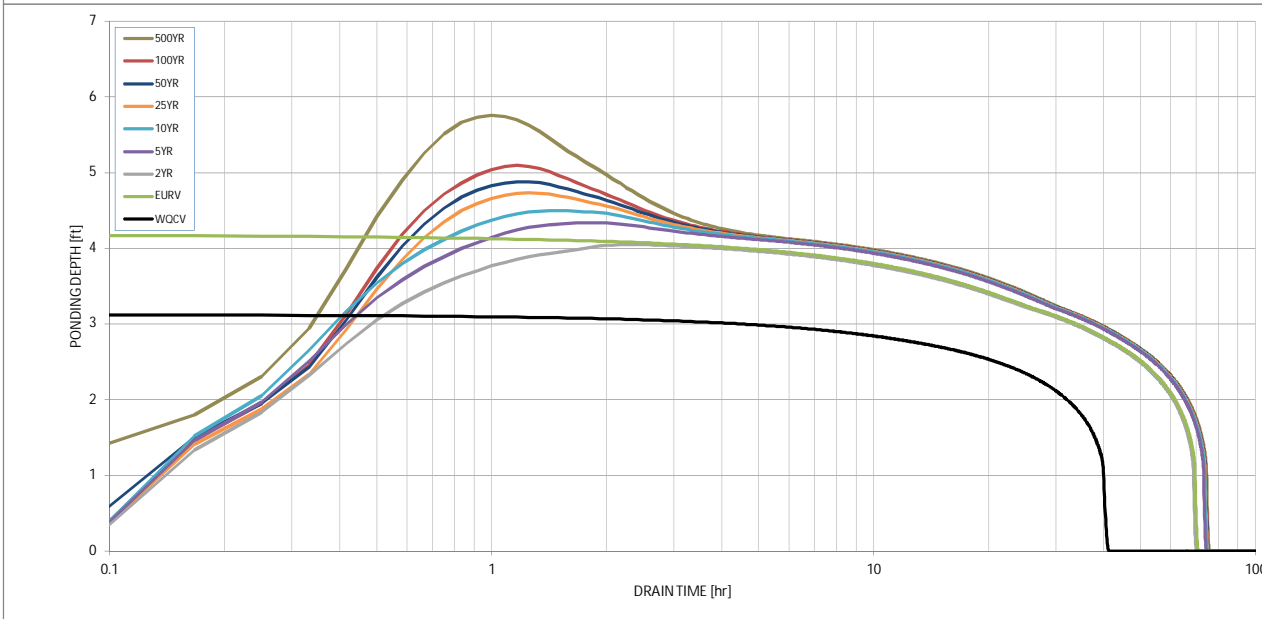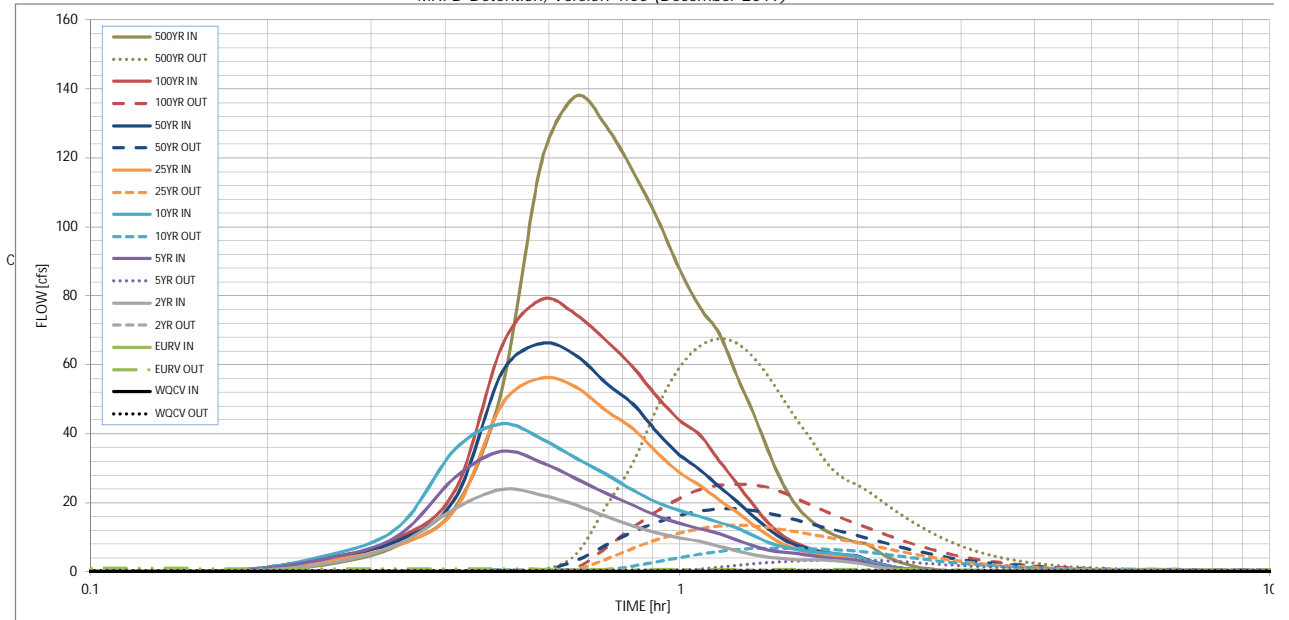

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound               |        |             |              |
| maximum bound               |        |             |              |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: \_\_\_\_\_

## Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.



| Time Interval | SOURCE  | CUHP       | CUHP       | CUHP         | CUHP         | CUHP          | CUHP          | CUHP          | CUHP           | CUHP           |
|---------------|---------|------------|------------|--------------|--------------|---------------|---------------|---------------|----------------|----------------|
|               | TIME    | WQCV [cfs] | EURV [cfs] | 2 Year [cfs] | 5 Year [cfs] | 10 Year [cfs] | 25 Year [cfs] | 50 Year [cfs] | 100 Year [cfs] | 500 Year [cfs] |
| 5.00 min      | 0:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.26          | 0.03           | 1.94           |
|               | 0:15:00 | 0.00       | 0.00       | 2.25         | 3.68         | 4.56          | 3.07          | 3.82          | 3.74           | 7.60           |
|               | 0:20:00 | 0.00       | 0.00       | 7.96         | 10.47        | 12.93         | 7.75          | 9.02          | 9.68           | 18.73          |
|               | 0:25:00 | 0.00       | 0.00       | 18.41        | 27.41        | 35.61         | 18.07         | 21.36         | 23.77          | 53.14          |
|               | 0:30:00 | 0.00       | 0.00       | 23.88        | 34.90        | 42.90         | 48.54         | 57.90         | 65.58          | 118.97         |
|               | 0:35:00 | 0.00       | 0.00       | 22.17        | 31.65        | 38.52         | 56.18         | 66.22         | 79.00          | 137.93         |
|               | 0:40:00 | 0.00       | 0.00       | 19.33        | 26.98        | 32.92         | 53.54         | 62.76         | 74.62          | 129.24         |
|               | 0:45:00 | 0.00       | 0.00       | 16.01        | 22.72        | 28.26         | 46.69         | 54.71         | 67.07          | 116.05         |
|               | 0:50:00 | 0.00       | 0.00       | 13.29        | 19.30        | 23.63         | 41.48         | 48.60         | 59.29          | 102.37         |
|               | 0:55:00 | 0.00       | 0.00       | 11.19        | 16.14        | 20.00         | 34.37         | 40.35         | 50.64          | 87.66          |
|               | 1:00:00 | 0.00       | 0.00       | 9.79         | 14.00        | 17.71         | 28.69         | 33.79         | 43.89          | 76.53          |
|               | 1:05:00 | 0.00       | 0.00       | 8.75         | 12.42        | 15.96         | 24.94         | 29.48         | 39.51          | 69.11          |
|               | 1:10:00 | 0.00       | 0.00       | 7.35         | 10.96        | 14.29         | 20.83         | 24.67         | 32.15          | 56.88          |
|               | 1:15:00 | 0.00       | 0.00       | 6.06         | 9.22         | 12.69         | 17.21         | 20.44         | 25.64          | 46.02          |
|               | 1:20:00 | 0.00       | 0.00       | 4.95         | 7.48         | 10.52         | 13.53         | 16.04         | 19.30          | 34.53          |
|               | 1:25:00 | 0.00       | 0.00       | 4.15         | 6.23         | 8.45          | 10.42         | 12.31         | 14.00          | 25.12          |
|               | 1:30:00 | 0.00       | 0.00       | 3.71         | 5.57         | 7.21          | 7.92          | 9.35          | 10.26          | 18.74          |
|               | 1:35:00 | 0.00       | 0.00       | 3.50         | 5.22         | 6.44          | 6.42          | 7.55          | 8.05           | 14.86          |
|               | 1:40:00 | 0.00       | 0.00       | 3.40         | 4.64         | 5.89          | 5.49          | 6.42          | 6.66           | 12.33          |
|               | 1:45:00 | 0.00       | 0.00       | 3.33         | 4.18         | 5.51          | 4.88          | 5.67          | 5.69           | 10.58          |
|               | 1:50:00 | 0.00       | 0.00       | 3.27         | 3.85         | 5.24          | 4.47          | 5.16          | 5.03           | 9.37           |
|               | 1:55:00 | 0.00       | 0.00       | 2.86         | 3.60         | 4.89          | 4.20          | 4.82          | 4.56           | 8.50           |
|               | 2:00:00 | 0.00       | 0.00       | 2.51         | 3.31         | 4.37          | 4.01          | 4.58          | 4.26           | 7.93           |
|               | 2:05:00 | 0.00       | 0.00       | 1.89         | 2.48         | 3.24          | 3.00          | 3.42          | 3.16           | 5.85           |
|               | 2:10:00 | 0.00       | 0.00       | 1.38         | 1.80         | 2.32          | 2.16          | 2.46          | 2.28           | 4.19           |
|               | 2:15:00 | 0.00       | 0.00       | 1.00         | 1.30         | 1.67          | 1.56          | 1.77          | 1.65           | 3.04           |
|               | 2:20:00 | 0.00       | 0.00       | 0.72         | 0.93         | 1.20          | 1.12          | 1.27          | 1.20           | 2.19           |
|               | 2:25:00 | 0.00       | 0.00       | 0.51         | 0.64         | 0.84          | 0.79          | 0.89          | 0.84           | 1.54           |
|               | 2:30:00 | 0.00       | 0.00       | 0.35         | 0.43         | 0.58          | 0.55          | 0.62          | 0.59           | 1.07           |
|               | 2:35:00 | 0.00       | 0.00       | 0.23         | 0.30         | 0.39          | 0.38          | 0.43          | 0.40           | 0.73           |
|               | 2:40:00 | 0.00       | 0.00       | 0.14         | 0.19         | 0.24          | 0.24          | 0.27          | 0.26           | 0.46           |
|               | 2:45:00 | 0.00       | 0.00       | 0.07         | 0.10         | 0.13          | 0.14          | 0.15          | 0.14           | 0.25           |
|               | 2:50:00 | 0.00       | 0.00       | 0.03         | 0.05         | 0.05          | 0.06          | 0.07          | 0.06           | 0.11           |
|               | 2:55:00 | 0.00       | 0.00       | 0.01         | 0.01         | 0.01          | 0.01          | 0.02          | 0.01           | 0.02           |
|               | 3:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:15:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:20:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 3:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:15:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:20:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 4:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:15:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:20:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 6:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |





# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

*MHFD-Detention, Version 4.04 (February 2021)*

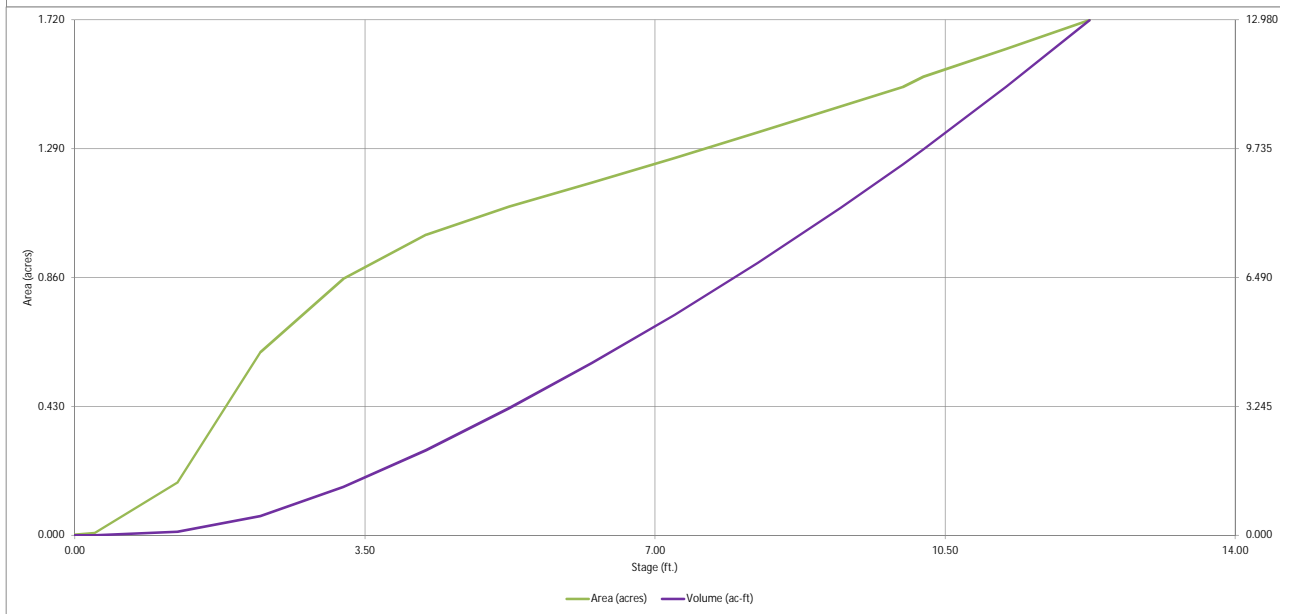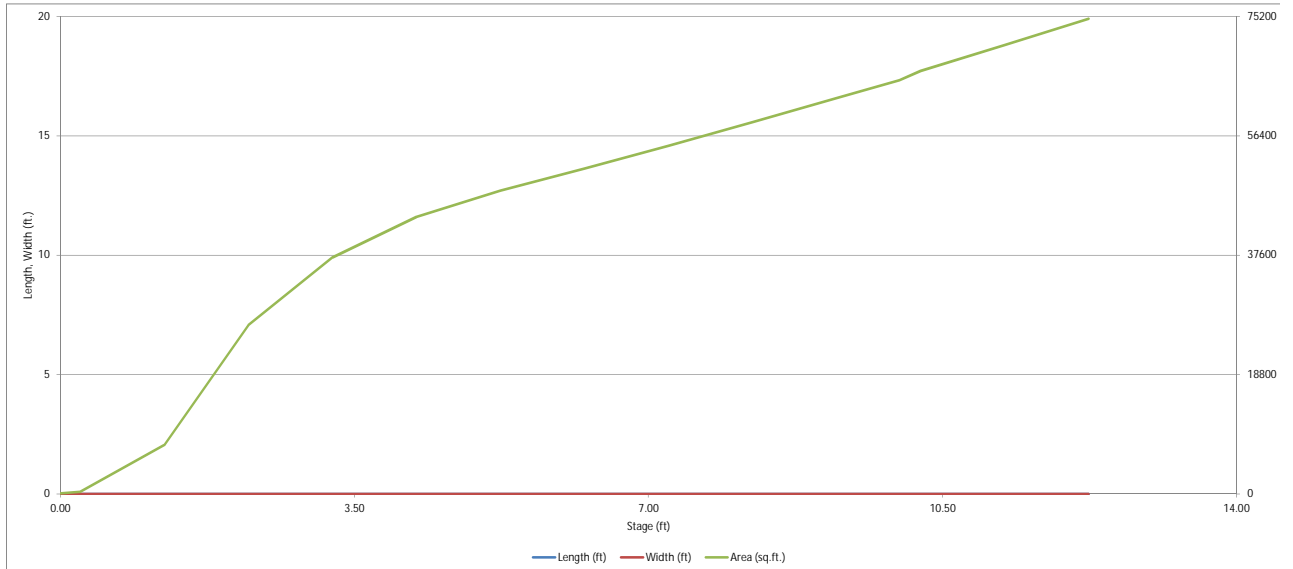




# DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-*Detention*, Version 4.04 (February 2021)

Project: Pond C with offsite flow

Basin ID: \_\_\_\_\_



**Example Zone Configuration (Retention Pond)**

|                          | Estimated Stage (ft) | Estimated Volume (ac-ft) | Outlet Type          |
|--------------------------|----------------------|--------------------------|----------------------|
| Zone 1 (WQCV)            | 3.32                 | 1.285                    | Orifice Plate        |
| Zone 2 (EURV)            | 4.27                 | 0.893                    | Orifice Plate        |
| Zone 3 (100+1/2WQCV)     | 9.79                 | 6.861                    | Weir&Pipe (Restrict) |
| <b>Total (all zones)</b> |                      | <b>9.038</b>             |                      |

**User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)**

Underdrain Orifice Invert Depth =  ft (distance below the filtration media surface)  
 Underdrain Orifice Diameter =  inches

**Calculated Parameters for Underdrain**  
 Underdrain Orifice Area =  ft<sup>2</sup>  
 Underdrain Orifice Centroid =  feet

**User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)**

Invert of Lowest Orifice =  ft (relative to basin bottom at Stage = 0 ft)  
 Depth at top of Zone using Orifice Plate =  ft (relative to basin bottom at Stage = 0 ft)  
 Orifice Plate: Orifice Vertical Spacing =  inches  
 Orifice Plate: Orifice Area per Row =  sq. inches (use rectangular openings)

**Calculated Parameters for Plate**  
 WQ Orifice Area per Row =  ft<sup>2</sup>  
 Elliptical Half-Width =  feet  
 Elliptical Slot Centroid =  feet  
 Elliptical Slot Area =  ft<sup>2</sup>

**User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)**

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.50             | 3.00             |                  |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 5.27             | 5.27             | 5.27             |                  |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

**User Input: Vertical Orifice (Circular or Rectangular)**

|   | Not Selected                     | Not Selected                     |   |
|---|----------------------------------|----------------------------------|---|
| Invert of Vertical Orifice =                  | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter =                   | <input type="text" value="N/A"/> | <input type="text" value="N/A"/> | inches  |

**Calculated Parameters for Vertical Orif**  
 Vertical Orifice Area =   
 Vertical Orifice Centroid =

**User Input: Overflow Weir (Dropbox with Flat or Sloped Gate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))**

|                                       | Zone 3 Weir     | Not Selected |   |
|---------------------------------------|-----------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | 4.36            | N/A          | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | 7.00            | N/A          | feet  |
| Overflow Weir Gate Slope =            | 4.00            | N/A          | H:V   |
| Horiz. Length of Weir Sides =         | 12.42           | N/A          | feet  |
| Overflow Gate Type =                  | Close Mesh Gate | N/A          |   |
| Debris Clogging % =                   | 75%             | N/A          | %   |

**Calculated Parameters for Overflow W**  
 Height of Gate Upper Edge, H<sub>1</sub> =   
 Overflow Weir Slope Length =   
 Gate Open Area / 100-yr Orifice Area =   
 Overflow Gate Open Area w/o Debris =   
 Overflow Gate Open Area w/ Debris =

**User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)**

|   | Zone 3 Restrictor | Not Selected |  |
|---|-------------------|--------------|--|
| Depth to Invert of Outlet Pipe =            | 6.29              | 0.00         | ft (distance below basin bottom at Stage = 0 ft) |
| Outlet Pipe Diameter =                      | 48.00             |              | inches   |
| Restrictor Plate Height Above Pipe Invert = | 35.00             |              | inches   |

**Calculated Parameters for Outlet Pipe w/ Flow Restriction Pl**  
 Outlet Orifice Area =   
 Outlet Orifice Centroid =   
 Half-Central Angle of Restrictor Plate on Pipe =

**User Input: Emergency Spillway (Rectangular or Trapezoidal)**


Spillway Invert Stage =  ft (relative to basin bottom at Stage = 0 ft)  
 Spillway Crest Length =  feet  
 Spillway End Slopes =  H:V  
 Freeboard above Max Water Surface =  feet

**Calculated Parameters for Spillway**  
 Spillway Design Flow Depth =  feet  
 Stage at Top of Freeboard =  feet  
 Basin Area at Top of Freeboard =  acres  
 Basin Volume at Top of Freeboard =  acre-ft

**Routed Hydrograph Results**

*The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AI)*

|   | WQCV  | EURV  | 2 Year          | 5 Year          | 10 Year         | 25 Year         | 50 Year         | 100 Year        |
|---|-------|-------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Design Storm Return Period                    |       |       |                 |                 |                 |                 |                 |                 |
| One-Hour Rainfall Depth (in)                  | N/A   | N/A   | 1.19            | 1.50            | 1.75            | 2.00            | 2.25            | 2.52            |
| CUHP Runoff Volume (acre-ft)                  | 1.285 | 2.178 | 3.054           | 6.693           | 10.318          | 16.758          | 21.161          | 27.489          |
| Inflow Hydrograph Volume (acre-ft)            | N/A   | N/A   | 3.054           | 6.693           | 10.318          | 16.758          | 21.161          | 27.489          |
| CUHP Predevelopment Peak Q (cfs)              | N/A   | N/A   | 17.6            | 49.5            | 77.1            | 142.4           | 179.0           | 229.9           |
| OPTIONAL Override Predevelopment Peak Q (cfs) | N/A   | N/A   |                 |                 |                 |                 |                 |                 |
| Predevelopment Unit Peak Flow, q (cfs/acre)   | N/A   | N/A   | 0.08            | 0.22            | 0.34            | 0.63            | 0.80            | 1.02            |
| Peak Inflow Q (cfs)                           | N/A   | N/A   | 29.3            | 63.0            | 90.7            | 154.7           | 191.6           | 243.4           |
| Peak Outflow Q (cfs)                          | 0.7   | 0.9   | 2.4             | 20.6            | 43.8            | 91.6            | 124.1           | 173.9           |
| Ratio Peak Outflow to Predevelopment Q        | N/A   | N/A   | N/A             | 0.4             | 0.6             | 0.6             | 0.7             | 0.8             |
| Structure Controlling Flow                    | Plate | Plate | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 |
| Max Velocity through Gate 1 (fps)             | N/A   | N/A   | 0.02            | 0.3             | 0.6             | 1.3             | 1.7             | 2.4             |
| Max Velocity through Gate 2 (fps)             | N/A   | N/A   | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| Time to Drain 97% of Inflow Volume (hours)    | 38    | 50    | 57              | 54              | 50              | 45              | 41              | 36              |
| Time to Drain 99% of Inflow Volume (hours)    | 40    | 53    | 62              | 61              | 59              | 56              | 54              | 52              |
| Maximum Ponding Depth (ft)                    | 3.32  | 4.27  | 4.80            | 6.22            | 7.10            | 8.35            | 9.02            | 9.94            |
| Area at Maximum Ponding Depth (acres)         | 0.87  | 1.01  | 1.05            | 1.17            | 1.25            | 1.35            | 1.41            | 1.49            |
| Maximum Volume Stored (acre-ft)               | 1.288 | 2.178 | 2.714           | 4.310           | 5.376           | 6.988           | 7.928           | 9.263           |



ice

ft<sup>2</sup>

feet

elr

feet

feet

ft<sup>2</sup>

ft<sup>2</sup>

ite

ft<sup>2</sup>

feet




radians

5)

|          |
|----------|
| 500 Year |
| 4.00     |
| 55.501   |
| 55.501   |
| 455.8    |
| 2.03     |
| 469.0    |
| 466.7    |
| 1.0      |
| Spillway |
| 2.6      |
| N/A      |
| 20       |
| 44       |
| 10.81    |
| 1.58     |
| 10.603   |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

*MHFD-Detention, Version 4.04 (February 2021)*

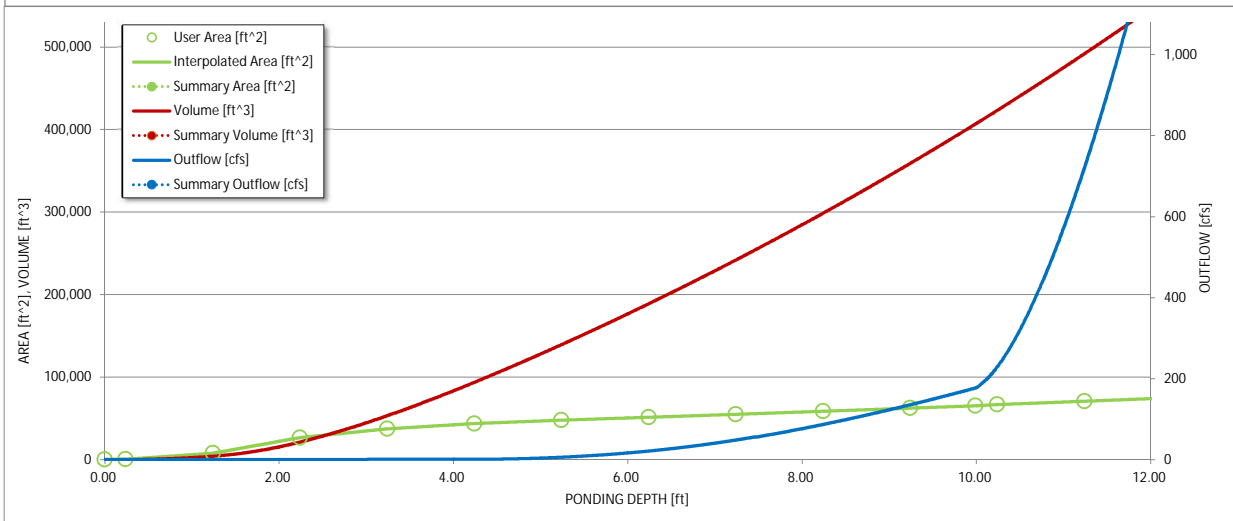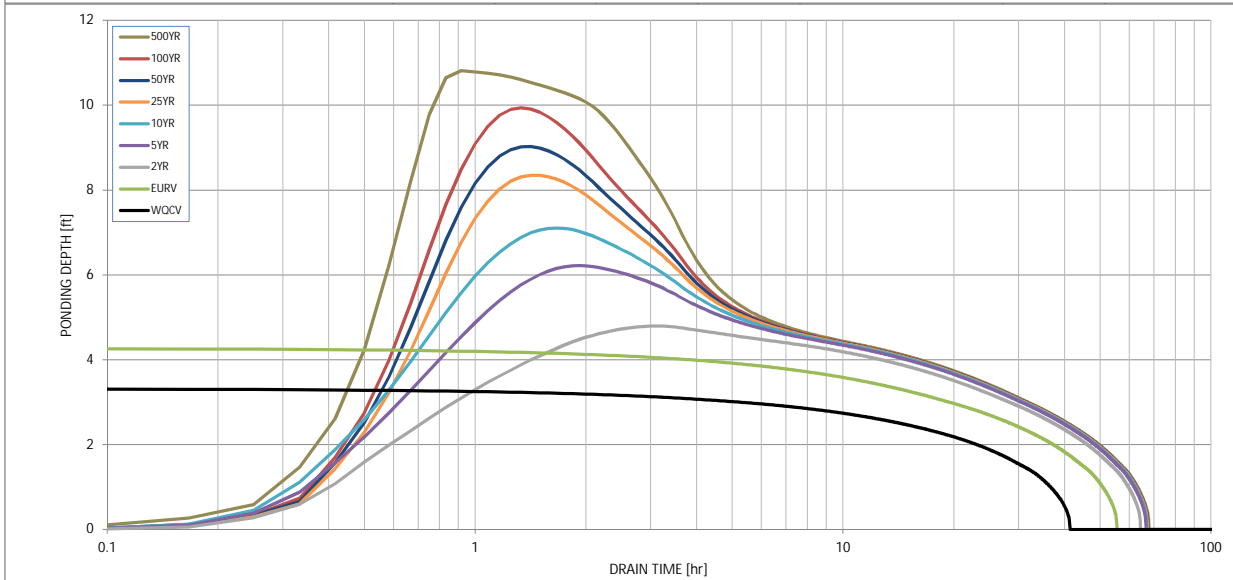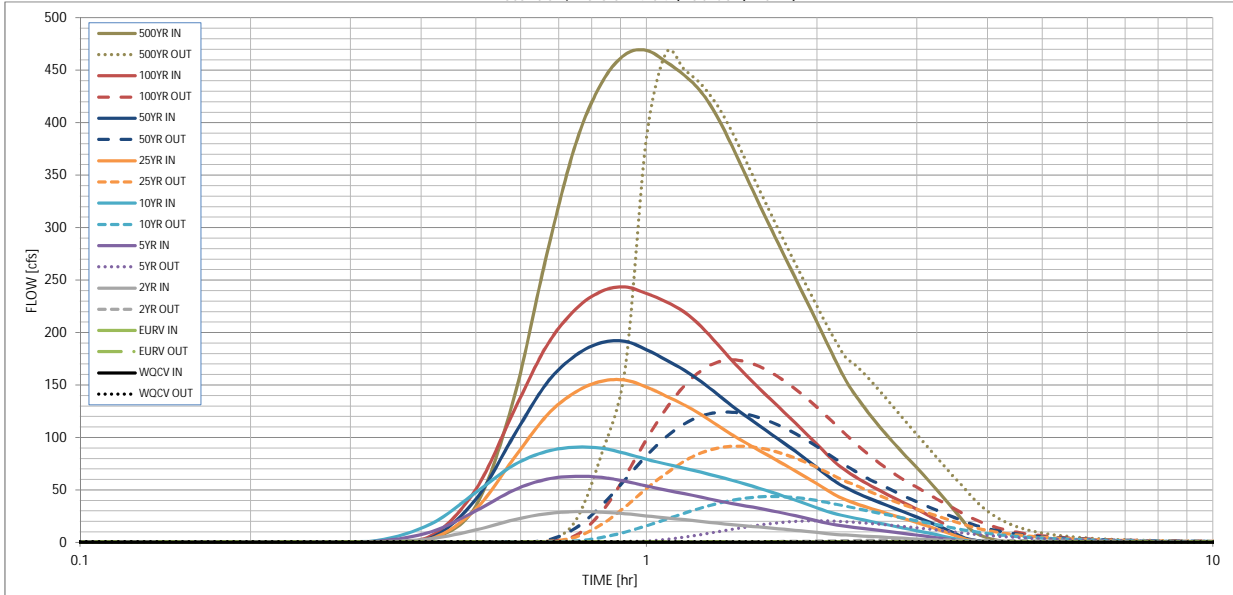

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound               |        |             |              |
| maximum bound               |        |             |              |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: \_\_\_\_\_

## Inflow Hydrographs


The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

| Time Interval | SOURCE  | CUHP       | CUHP       | CUHP         | CUHP         | CUHP          | CUHP          | CUHP          | CUHP           | CUHP           |
|---------------|---------|------------|------------|--------------|--------------|---------------|---------------|---------------|----------------|----------------|
|               | TIME    | WQCV [cfs] | EURV [cfs] | 2 Year [cfs] | 5 Year [cfs] | 10 Year [cfs] | 25 Year [cfs] | 50 Year [cfs] | 100 Year [cfs] | 500 Year [cfs] |
| 5.00 min      | 0:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.01          | 0.00           | 0.08           |
|               | 0:15:00 | 0.00       | 0.00       | 0.09         | 0.15         | 0.19          | 0.13          | 0.17          | 0.16           | 0.44           |
|               | 0:20:00 | 0.00       | 0.00       | 0.46         | 1.05         | 1.76          | 0.51          | 0.62          | 0.65           | 3.37           |
|               | 0:25:00 | 0.00       | 0.00       | 3.52         | 9.98         | 17.69         | 3.45          | 4.47          | 6.28           | 34.90          |
|               | 0:30:00 | 0.00       | 0.00       | 11.93        | 30.05        | 47.70         | 31.84         | 41.28         | 50.76          | 137.07         |
|               | 0:35:00 | 0.00       | 0.00       | 21.52        | 49.78        | 73.78         | 79.92         | 101.83        | 125.08         | 274.28         |
|               | 0:40:00 | 0.00       | 0.00       | 27.38        | 60.22        | 86.67         | 120.91        | 151.70        | 187.33         | 379.67         |
|               | 0:45:00 | 0.00       | 0.00       | 29.25        | 62.98        | 90.72         | 143.37        | 178.24        | 222.26         | 437.75         |
|               | 0:50:00 | 0.00       | 0.00       | 28.91        | 61.90        | 89.69         | 153.61        | 190.33        | 239.35         | 464.94         |
|               | 0:55:00 | 0.00       | 0.00       | 27.31        | 58.31        | 84.83         | 154.68        | 191.57        | 243.35         | 468.96         |
|               | 1:00:00 | 0.00       | 0.00       | 25.18        | 53.76        | 79.20         | 148.05        | 183.67        | 237.22         | 457.96         |
|               | 1:05:00 | 0.00       | 0.00       | 23.30        | 49.83        | 74.65         | 139.47        | 173.85        | 229.30         | 445.23         |
|               | 1:10:00 | 0.00       | 0.00       | 21.67        | 46.46        | 70.66         | 130.94        | 164.08        | 219.55         | 429.09         |
|               | 1:15:00 | 0.00       | 0.00       | 20.00        | 43.13        | 66.79         | 121.64        | 153.20        | 205.59         | 405.92         |
|               | 1:20:00 | 0.00       | 0.00       | 18.33        | 39.85        | 62.92         | 111.74        | 141.31        | 189.15         | 377.68         |
|               | 1:25:00 | 0.00       | 0.00       | 16.89        | 37.05        | 59.18         | 102.49        | 129.96        | 173.22         | 348.90         |
|               | 1:30:00 | 0.00       | 0.00       | 15.71        | 34.69        | 55.38         | 94.65         | 120.20        | 159.28         | 322.04         |
|               | 1:35:00 | 0.00       | 0.00       | 14.62        | 32.42        | 51.53         | 87.45         | 111.13        | 146.62         | 296.98         |
|               | 1:40:00 | 0.00       | 0.00       | 13.57        | 30.12        | 47.70         | 80.71         | 102.63        | 135.06         | 273.69         |
|               | 1:45:00 | 0.00       | 0.00       | 12.54        | 27.73        | 43.94         | 74.27         | 94.49         | 124.18         | 251.62         |
|               | 1:50:00 | 0.00       | 0.00       | 11.51        | 25.31        | 40.27         | 68.04         | 86.63         | 113.68         | 230.48         |
|               | 1:55:00 | 0.00       | 0.00       | 10.47        | 22.89        | 36.64         | 61.91         | 78.93         | 103.47         | 209.98         |
|               | 2:00:00 | 0.00       | 0.00       | 9.42         | 20.50        | 32.98         | 55.88         | 71.36         | 93.53          | 190.08         |
|               | 2:05:00 | 0.00       | 0.00       | 8.40         | 18.24        | 29.54         | 49.93         | 63.88         | 83.80          | 170.99         |
|               | 2:10:00 | 0.00       | 0.00       | 7.56         | 16.54        | 26.96         | 44.50         | 57.07         | 74.97          | 154.29         |
|               | 2:15:00 | 0.00       | 0.00       | 6.99         | 15.33        | 24.95         | 40.53         | 52.07         | 68.30          | 141.02         |
|               | 2:20:00 | 0.00       | 0.00       | 6.50         | 14.25        | 23.11         | 37.31         | 47.94         | 62.76          | 129.64         |
|               | 2:25:00 | 0.00       | 0.00       | 6.05         | 13.24        | 21.40         | 34.51         | 44.31         | 57.85          | 119.36         |
|               | 2:30:00 | 0.00       | 0.00       | 5.61         | 12.27        | 19.77         | 31.96         | 40.98         | 53.40          | 109.96         |
|               | 2:35:00 | 0.00       | 0.00       | 5.19         | 11.33        | 18.21         | 29.61         | 37.92         | 49.28          | 101.24         |
|               | 2:40:00 | 0.00       | 0.00       | 4.78         | 10.42        | 16.69         | 27.35         | 34.98         | 45.43          | 93.08          |
|               | 2:45:00 | 0.00       | 0.00       | 4.38         | 9.53         | 15.24         | 25.17         | 32.18         | 41.82          | 85.46          |
|               | 2:50:00 | 0.00       | 0.00       | 3.99         | 8.66         | 13.83         | 23.07         | 29.47         | 38.41          | 78.26          |
|               | 2:55:00 | 0.00       | 0.00       | 3.61         | 7.80         | 12.48         | 20.99         | 26.82         | 35.02          | 71.23          |
|               | 3:00:00 | 0.00       | 0.00       | 3.22         | 6.96         | 11.18         | 18.93         | 24.20         | 31.66          | 64.33          |
|               | 3:05:00 | 0.00       | 0.00       | 2.84         | 6.13         | 9.88          | 16.88         | 21.59         | 28.30          | 57.45          |
|               | 3:10:00 | 0.00       | 0.00       | 2.46         | 5.30         | 8.60          | 14.84         | 19.00         | 24.94          | 50.60          |
|               | 3:15:00 | 0.00       | 0.00       | 2.09         | 4.48         | 7.32          | 12.80         | 16.41         | 21.60          | 43.76          |
|               | 3:20:00 | 0.00       | 0.00       | 1.71         | 3.67         | 6.05          | 10.77         | 13.83         | 18.25          | 36.94          |
|               | 3:25:00 | 0.00       | 0.00       | 1.34         | 2.85         | 4.79          | 8.74          | 11.25         | 14.92          | 30.15          |
|               | 3:30:00 | 0.00       | 0.00       | 0.98         | 2.05         | 3.54          | 6.71          | 8.69          | 11.59          | 23.40          |
|               | 3:35:00 | 0.00       | 0.00       | 0.62         | 1.27         | 2.37          | 4.71          | 6.15          | 8.30           | 16.92          |
|               | 3:40:00 | 0.00       | 0.00       | 0.35         | 0.78         | 1.68          | 2.85          | 3.83          | 5.32           | 11.64          |
|               | 3:45:00 | 0.00       | 0.00       | 0.24         | 0.58         | 1.32          | 1.82          | 2.56          | 3.55           | 8.30           |
|               | 3:50:00 | 0.00       | 0.00       | 0.19         | 0.45         | 1.05          | 1.19          | 1.76          | 2.42           | 6.00           |
|               | 3:55:00 | 0.00       | 0.00       | 0.15         | 0.37         | 0.84          | 0.80          | 1.23          | 1.61           | 4.27           |
| 4:00:00       | 0.00    | 0.00       | 0.12       | 0.29         | 0.67         | 0.52          | 0.84          | 1.03          | 2.97           |                |
| 4:05:00       | 0.00    | 0.00       | 0.10       | 0.23         | 0.52         | 0.36          | 0.60          | 0.63          | 2.00           |                |
| 4:10:00       | 0.00    | 0.00       | 0.08       | 0.18         | 0.39         | 0.24          | 0.41          | 0.35          | 1.29           |                |
| 4:15:00       | 0.00    | 0.00       | 0.06       | 0.13         | 0.28         | 0.16          | 0.28          | 0.20          | 0.83           |                |
| 4:20:00       | 0.00    | 0.00       | 0.05       | 0.10         | 0.20         | 0.12          | 0.20          | 0.15          | 0.60           |                |
| 4:25:00       | 0.00    | 0.00       | 0.04       | 0.07         | 0.14         | 0.08          | 0.15          | 0.12          | 0.44           |                |
| 4:30:00       | 0.00    | 0.00       | 0.03       | 0.05         | 0.11         | 0.06          | 0.12          | 0.09          | 0.35           |                |
| 4:35:00       | 0.00    | 0.00       | 0.02       | 0.04         | 0.08         | 0.05          | 0.09          | 0.07          | 0.27           |                |
| 4:40:00       | 0.00    | 0.00       | 0.02       | 0.02         | 0.06         | 0.03          | 0.06          | 0.05          | 0.20           |                |
| 4:45:00       | 0.00    | 0.00       | 0.01       | 0.01         | 0.04         | 0.02          | 0.05          | 0.04          | 0.14           |                |
| 4:50:00       | 0.00    | 0.00       | 0.01       | 0.01         | 0.02         | 0.02          | 0.03          | 0.03          | 0.09           |                |
| 4:55:00       | 0.00    | 0.00       | 0.00       | 0.01         | 0.01         | 0.01          | 0.02          | 0.01          | 0.06           |                |
| 5:00:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.01          | 0.01          | 0.03           |                |
| 5:05:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.01           |                |
| 5:10:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:15:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:20:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:25:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:30:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:35:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:40:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:45:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:50:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:55:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 6:00:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |





# EARLY GRADING - DRAINAGE MAP

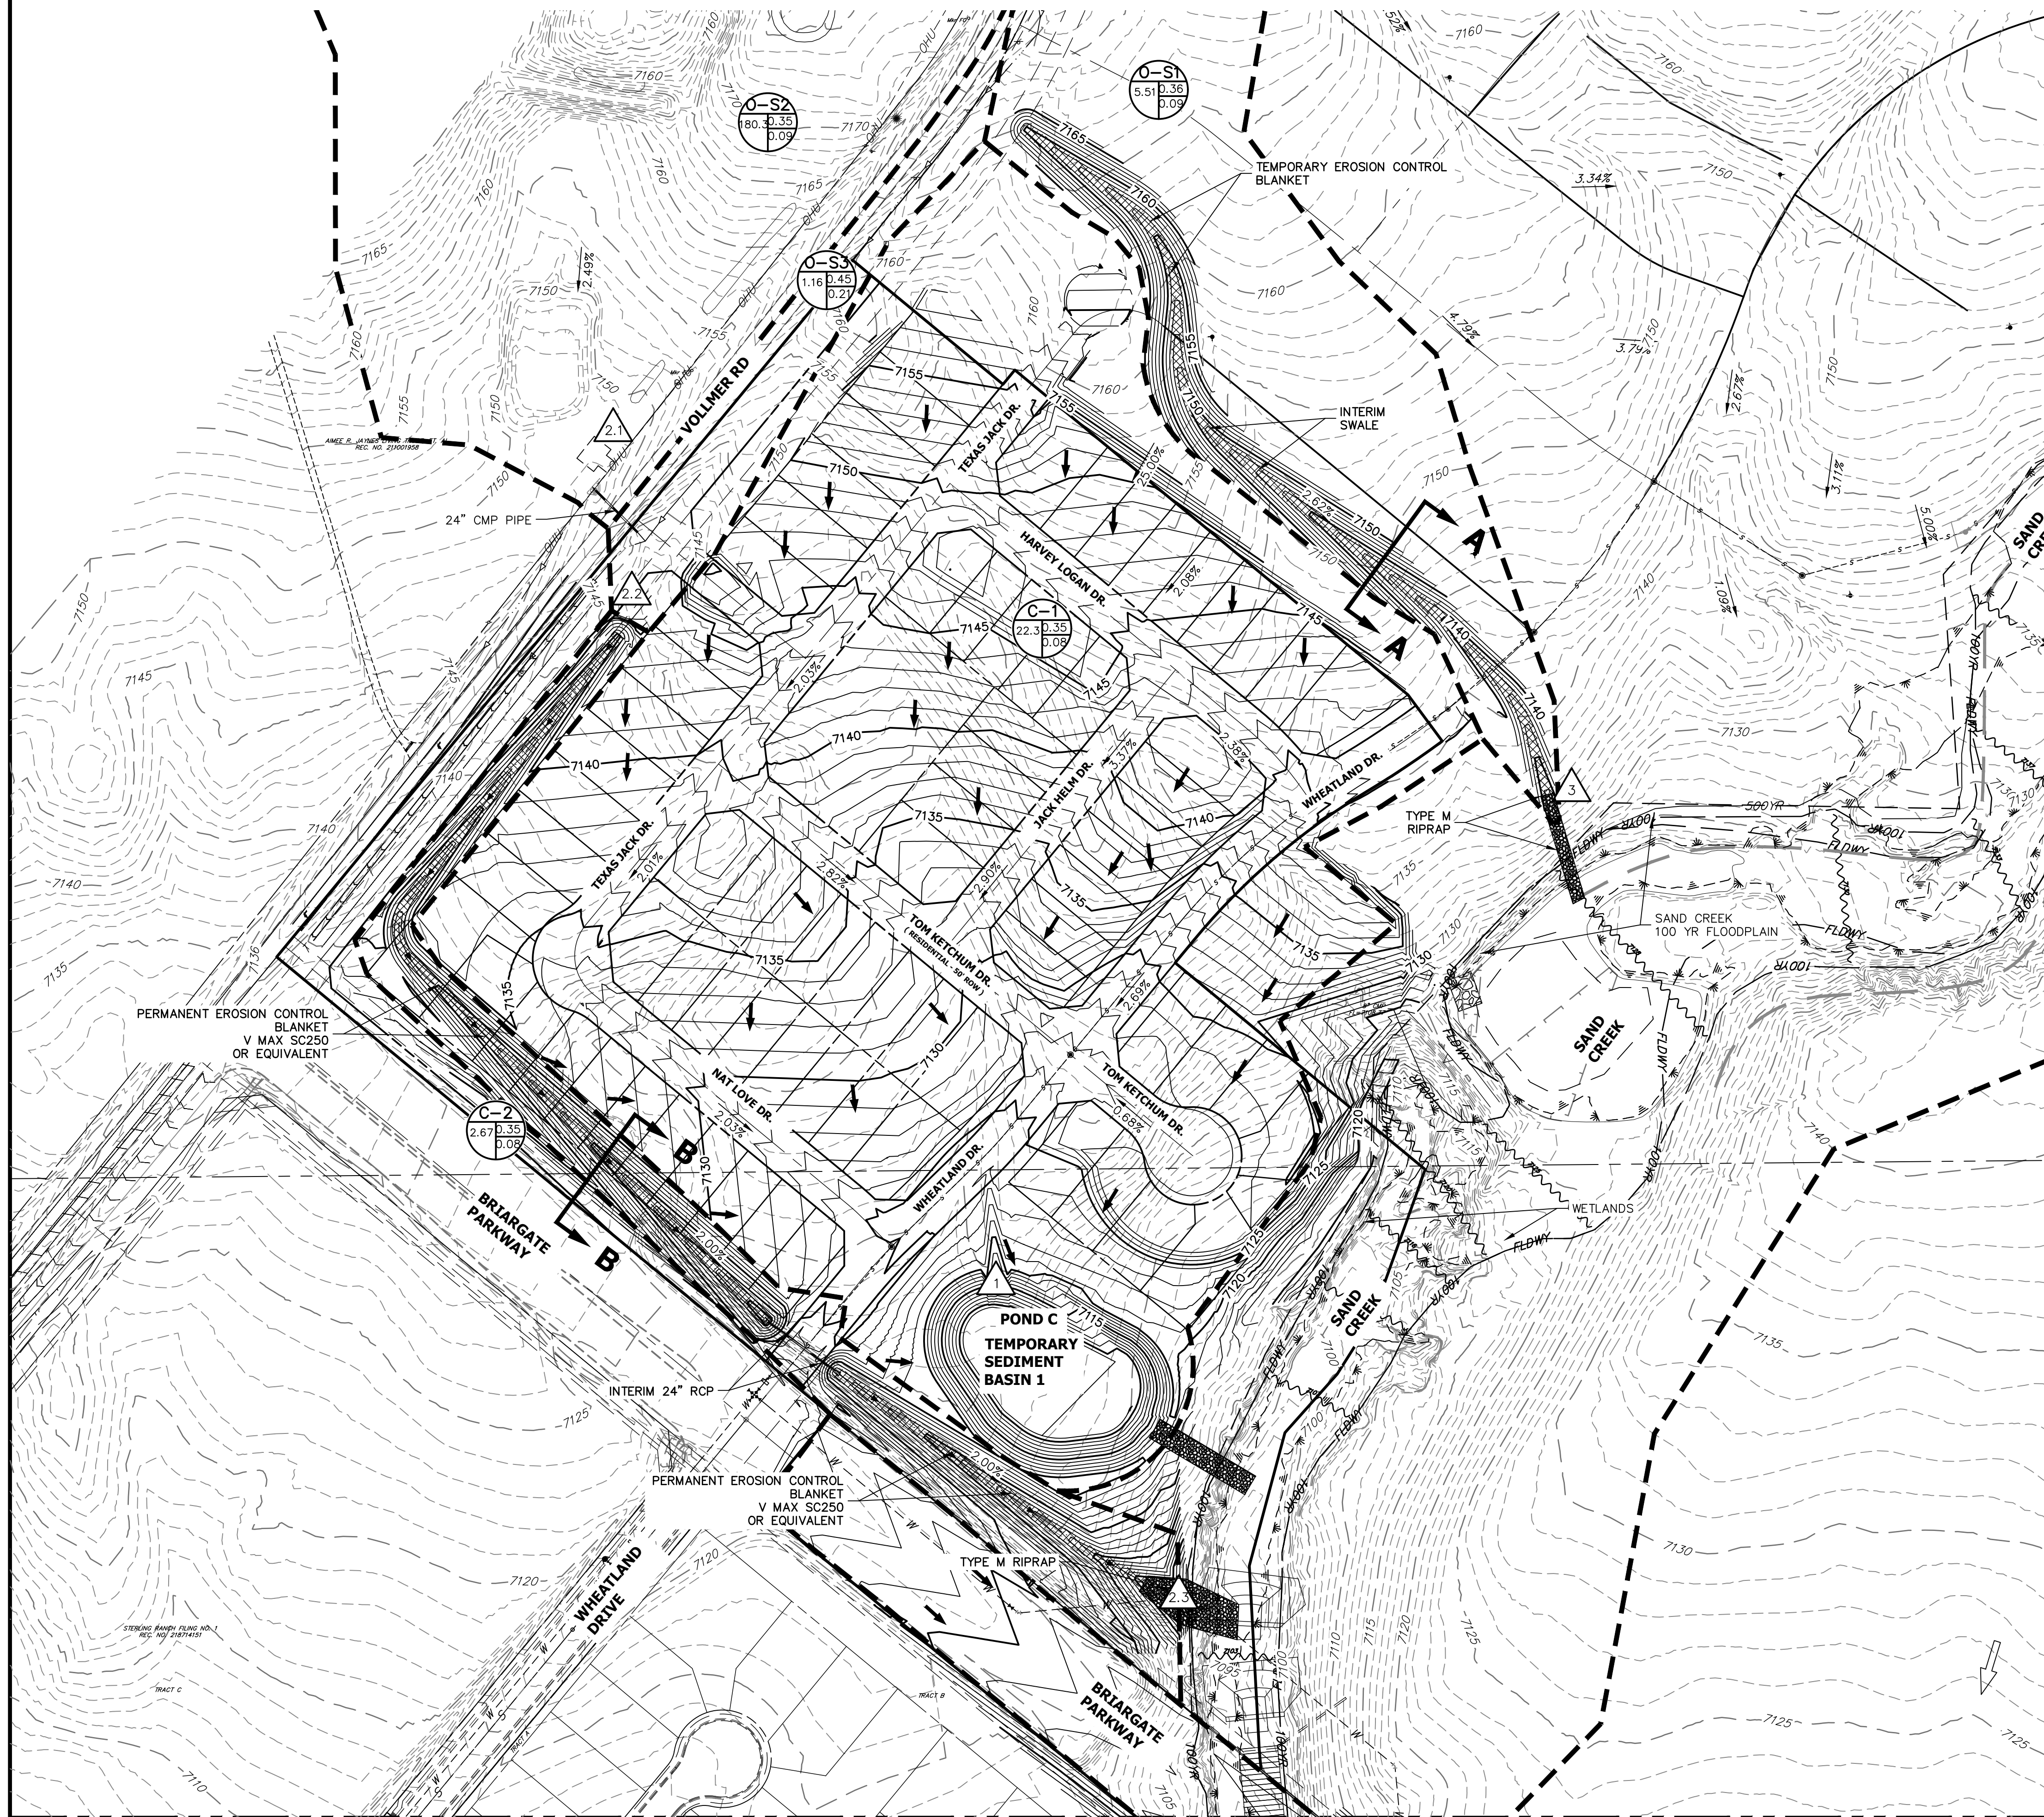

### LEGEND

BASIN ID  
 A: BASIN LABEL  
 B: AREA  
 C: C-100 YR  
 D: C-5 YR

DESIGN POINT

PROPOSED FLOW DIRECTION

BASIN DRAINAGE AREA

EXISTING STORM SEWER

STORM SEWER PROPOSED

PROPOSED R.O.W

PROPOSED PROPERTY LINES

PROPOSED SIDEWALK

EXISTING PROPERTY LINE

ROW EXISTING

FL EXISTING

SIDEWALK EXISTING

DRAINAGE ACCESS & MAINTENANCE EASEMENT

CHECK DAM

EXISTING

PROPOSED

SEDIMENT BASIN - SUMMARY TABLE


| Temporary Sediment Basin | Contributing On-site Basin | Area (acres) | Percent Impervious | Contributing Off-site Basin | Off-Site Area (acres) | Percent Impervious | Required Volume (cf) | Provided Volume (cf) |
|--------------------------|----------------------------|--------------|--------------------|-----------------------------|-----------------------|--------------------|----------------------|----------------------|
| 1                        | C-1                        | 22.30        | 2%                 |                             |                       | 2%                 | 80,280               | 108,900              |
| 2                        | D                          | 17.29        | 2%                 | O5,O-S4,O-S5,O5-6,O5-7      | 250.76                | 2%                 | 187,624              | 201,393              |

BASIN - SUMMARY TABLE

| Tributary Sub-basin | Area (acres) | Percent Impervious | C <sub>s</sub> | C <sub>100</sub> | t <sub>c</sub> (min) | Q <sub>s</sub> (cfs) | Q <sub>100</sub> (cfs) |
|---------------------|--------------|--------------------|----------------|------------------|----------------------|----------------------|------------------------|
| C-1                 | 22.30        | 2.0%               | 0.08           | 0.35             | 40.1                 | 3.6                  | 26.8                   |
| C-2                 | 2.67         | 2.0%               | 0.08           | 0.35             | 24.9                 | 0.6                  | 4.3                    |
| D                   | 17.29        | 2.0%               | 0.08           | 0.35             | 52.1                 | 2.3                  | 16.8                   |
| O5                  | 124.20       | 2.0%               | 0.08           | 0.35             | 64.5                 | 13.3                 | 97.2                   |
| O-S1                | 5.51         | 3.6%               | 0.09           | 0.36             | 36.5                 | 1.1                  | 7.3                    |
| O-S2                | 180.30       | 2.8%               | 0.09           | 0.35             | 47.4                 | 28.1                 | 192.9                  |
| O-S3                | 1.16         | 18.1%              | 0.21           | 0.45             | 14.0                 | 0.9                  | 3.2                    |
| O-S4                | 67.77        | 2.0%               | 0.08           | 0.35             | 34.0                 | 12.4                 | 91.3                   |
| O-S5                | 6.18         | 2.0%               | 0.08           | 0.35             | 30.7                 | 1.2                  | 8.9                    |
| O-S6                | 35.25        | 2.0%               | 0.08           | 0.35             | 29.3                 | 7.1                  | 52.1                   |
| O-S7                | 17.36        | 2.0%               | 0.08           | 0.35             | 29.5                 | 3.5                  | 25.5                   |

### DESIGN POINT

| DP  | Q5 Total | Q100 Total |
|-----|----------|------------|
| 0   | 28.6     | 214.2      |
| 1   | 3.6      | 26.8       |
| 2.1 | 28.1     | 192.9      |
| 2.2 | 28.5     | 194.5      |
| 2.3 | 28.9     | 197.3      |
| 3   | 1.1      | 7.3        |
| 4   | 12.4     | 91.3       |
| 5   | 1.2      | 8.9        |
| 6.1 | 7.1      | 52.1       |
| 6.2 | 3.5      | 77.4       |
| 7   | 26.7     | 196.2      |
| 8   | 2.3      | 16.8       |

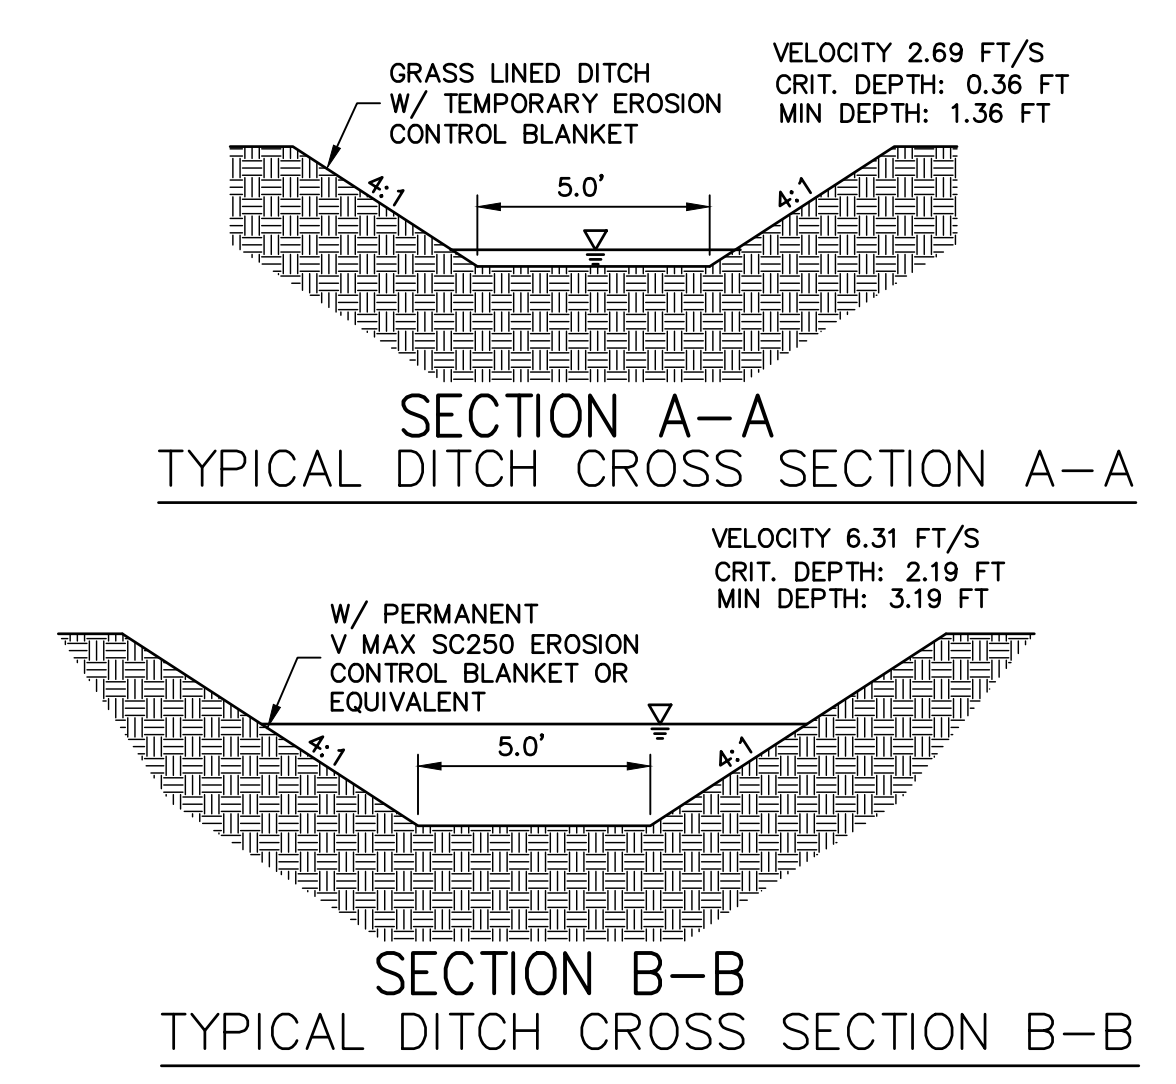

EARLY GRADING - DRAINAGE MAP  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 3/23/22  
 SHEET 1 OF 4

100 50 0 100 200  
 ORIGINAL SCALE: 1" = 100'


**J-R ENGINEERING**  
 A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com


SEE SHEET 2



# EARLY GRADING - DRAINAGE MAP

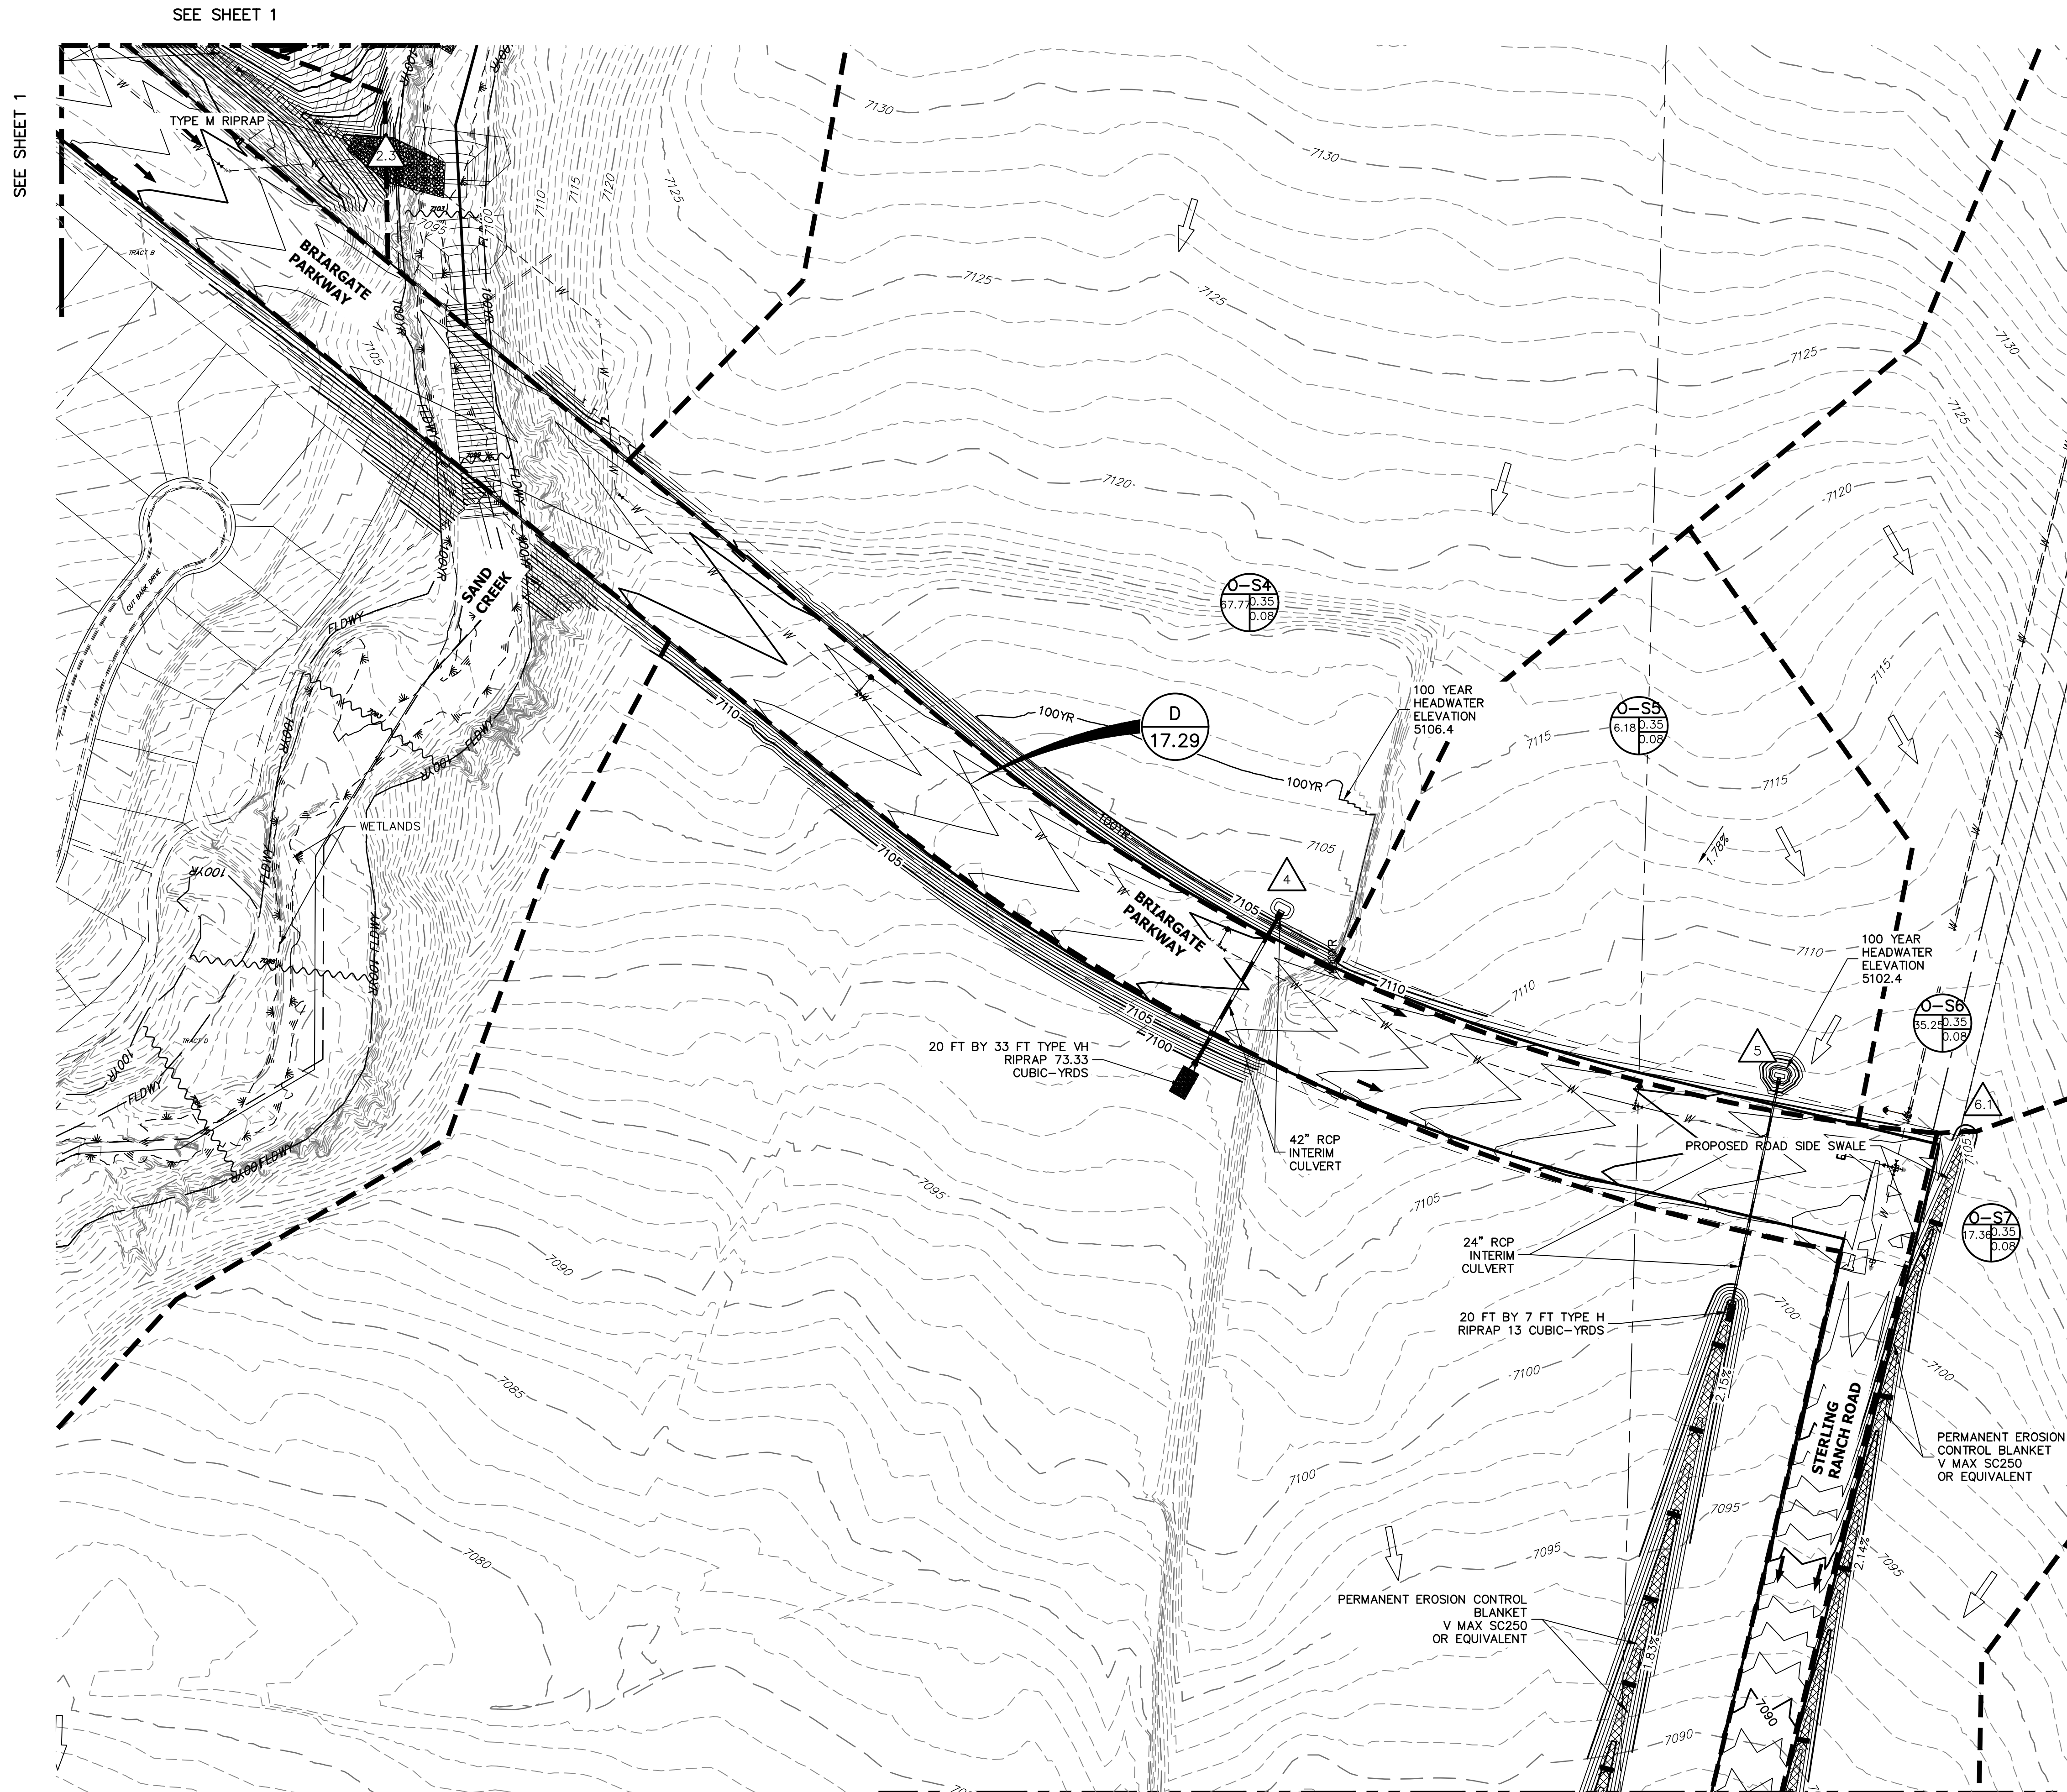

## LEGEND

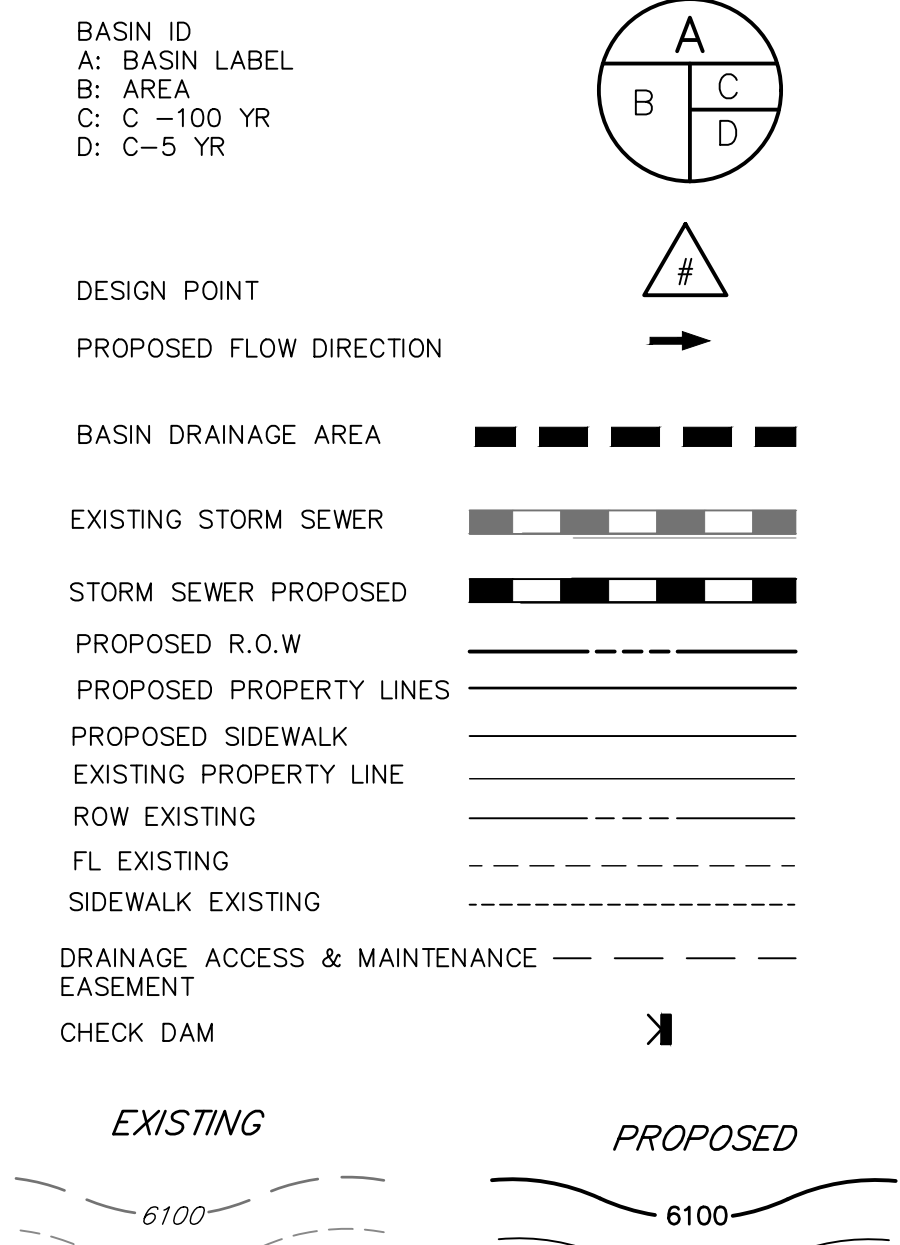

## SEDIMENT BASIN - SUMMARY TABLE


| Temporary Sediment Basin | Contributing On-site Basin | Area (acres) | Percent Impervious | Contributing Off-site Basin | Off-Site Area (acres) | Percent Impervious | Required Volume (cf) | Provided Volume (cf) |
|--------------------------|----------------------------|--------------|--------------------|-----------------------------|-----------------------|--------------------|----------------------|----------------------|
| 1                        | C-1                        | 22.30        | 2%                 |                             |                       | 2%                 | 80,280               | 108,900              |
| 2                        | D                          | 17.29        | 2%                 | O5,O-S4,O-S5,O5-6,O5-7      | 250.76                | 2%                 | 187,624              | 201,393              |

## Basin - Summary Table

| Tributary Sub-basin | Area (acres) | Percent Impervious | C <sub>s</sub> | C <sub>100</sub> | t <sub>c</sub> (min) | Q <sub>s</sub> (cfs) | Q <sub>100</sub> (cfs) |
|---------------------|--------------|--------------------|----------------|------------------|----------------------|----------------------|------------------------|
| C-1                 | 22.30        | 2.0%               | 0.08           | 0.35             | 40.1                 | 3.6                  | 26.8                   |
| C-2                 | 2.67         | 2.0%               | 0.08           | 0.35             | 24.9                 | 0.6                  | 4.3                    |
| D                   | 17.29        | 2.0%               | 0.08           | 0.35             | 52.1                 | 2.3                  | 16.8                   |
| O5                  | 124.20       | 2.0%               | 0.08           | 0.35             | 64.5                 | 13.3                 | 97.2                   |
| O-S1                | 5.51         | 3.6%               | 0.09           | 0.36             | 36.5                 | 1.1                  | 7.3                    |
| O-S2                | 180.30       | 2.8%               | 0.09           | 0.35             | 47.4                 | 28.1                 | 192.9                  |
| O-S3                | 1.16         | 18.1%              | 0.21           | 0.45             | 14.0                 | 0.9                  | 3.2                    |
| O-S4                | 67.77        | 2.0%               | 0.08           | 0.35             | 34.0                 | 12.4                 | 91.3                   |
| O-S5                | 6.18         | 2.0%               | 0.08           | 0.35             | 30.7                 | 1.2                  | 8.9                    |
| O-S6                | 35.25        | 2.0%               | 0.08           | 0.35             | 29.3                 | 7.1                  | 52.1                   |
| O-S7                | 17.36        | 2.0%               | 0.08           | 0.35             | 29.5                 | 3.5                  | 25.5                   |

## DESIGN POINT

| DP  | Q5    |       | Q100  |       |
|-----|-------|-------|-------|-------|
|     | Total | Total | Total | Total |
| 0   | 28.6  | 214.2 | 28.6  | 214.2 |
| 1   | 3.6   | 26.8  | 3.6   | 26.8  |
| 2.1 | 28.1  | 192.9 | 28.1  | 192.9 |
| 2.2 | 28.5  | 194.5 | 28.5  | 194.5 |
| 2.3 | 28.9  | 197.3 | 28.9  | 197.3 |
| 3   | 1.1   | 7.3   | 1.1   | 7.3   |
| 4   | 12.4  | 91.3  | 12.4  | 91.3  |
| 5   | 1.2   | 8.9   | 1.2   | 8.9   |
| 6.1 | 7.1   | 52.1  | 7.1   | 52.1  |
| 6.2 | 3.5   | 26.8  | 3.5   | 26.8  |
| 7   | 26.7  | 196.2 | 26.7  | 196.2 |
| 8   | 2.3   | 16.8  | 2.3   | 16.8  |

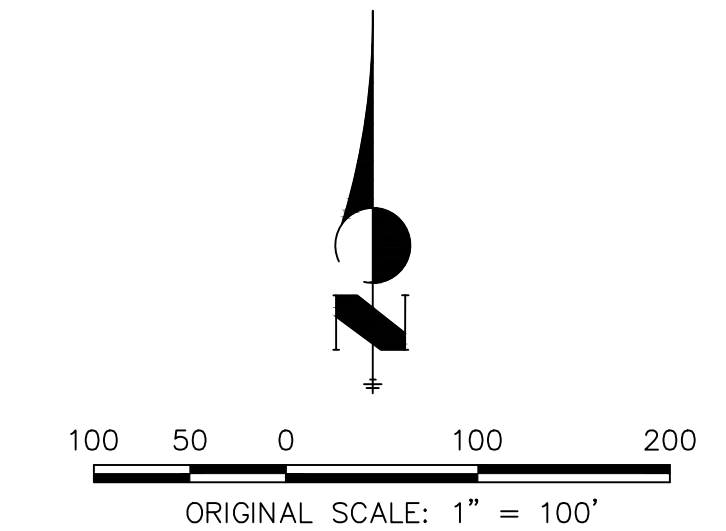

EARLY GRADING - DRAINAGE MAP  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 3/23/22  
 SHEET 2 OF 4




Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com




# EARLY GRADING - DRAINAGE MAP

SEE SHEET 2

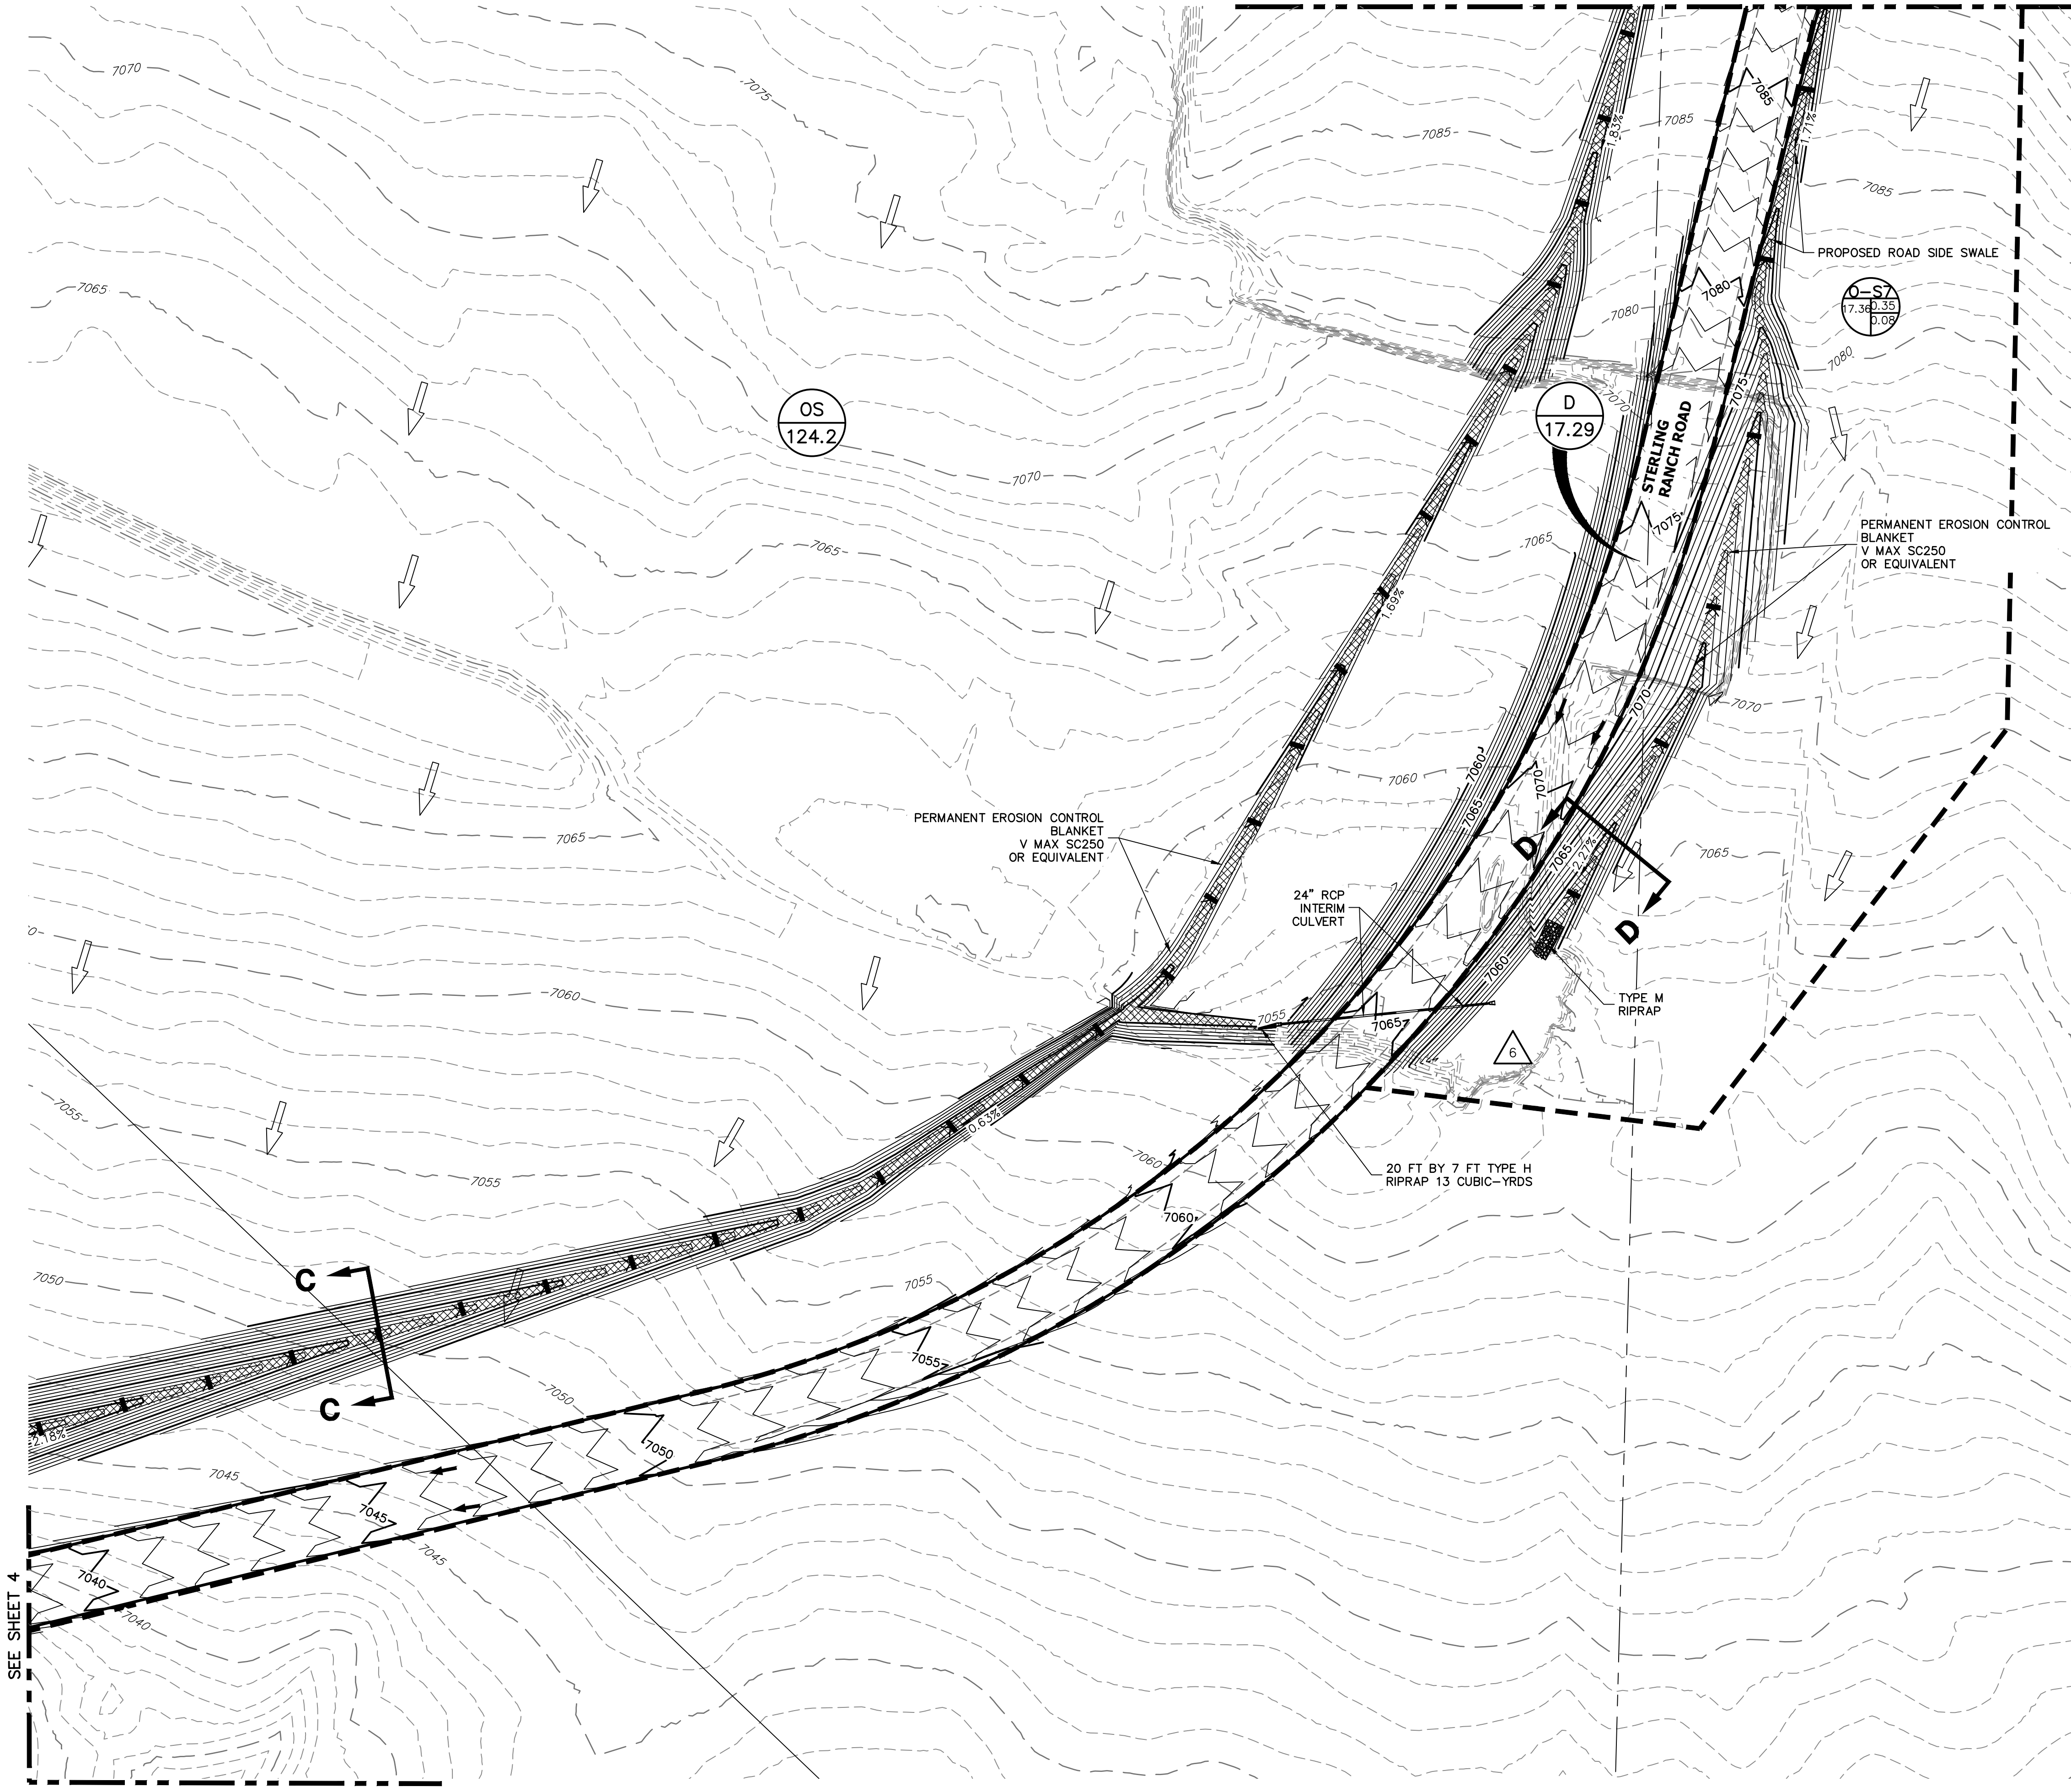

## LEGEND

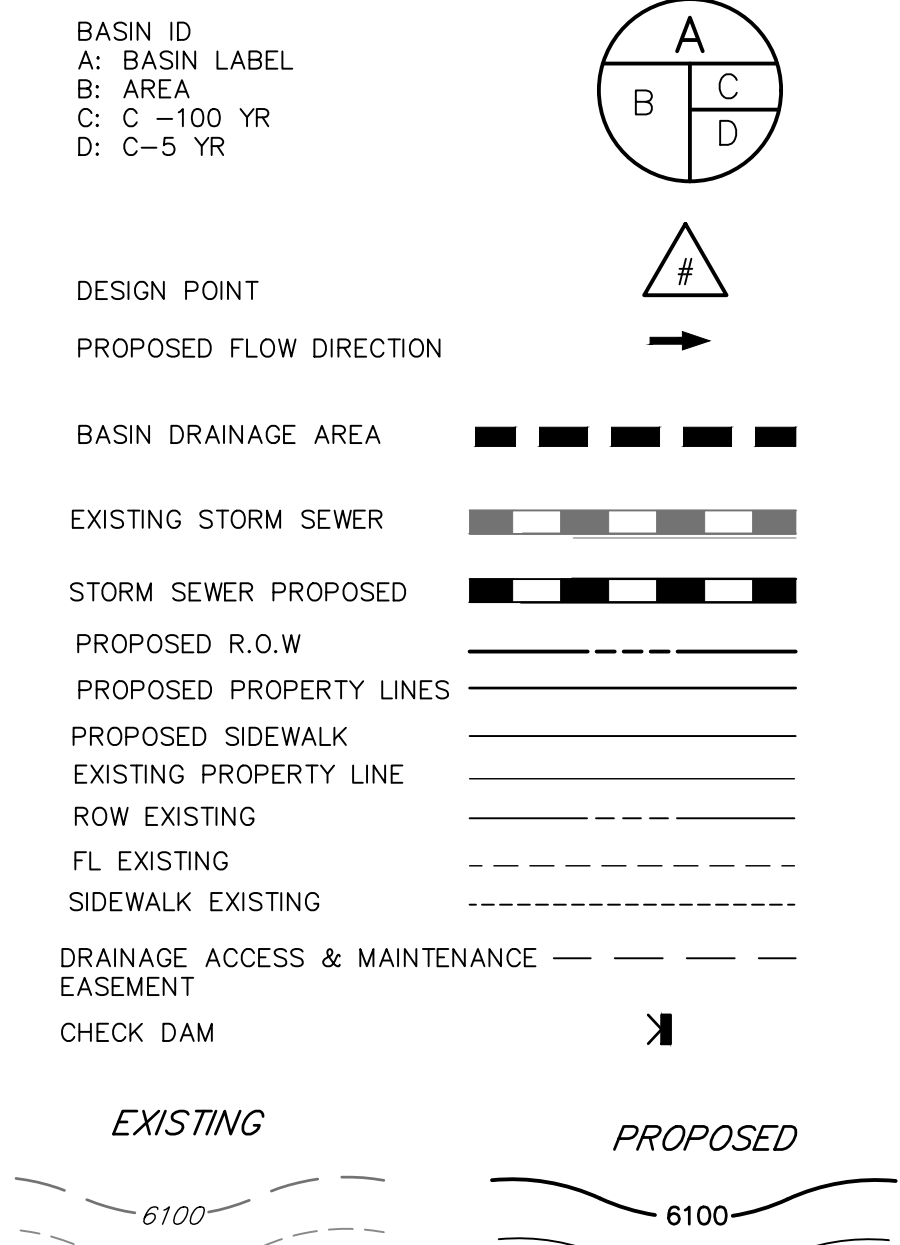

## SEDIMENT BASIN - SUMMARY TABLE


| Temporary Sediment Basin | Contributing On-site Basin | Area (acres) | Percent Impervious | Contributing Off-site Basin | Off-Site Area (acres) | Percent Impervious | Required Volume (cf) | Provided Volume (cf) |
|--------------------------|----------------------------|--------------|--------------------|-----------------------------|-----------------------|--------------------|----------------------|----------------------|
| 1                        | C-1                        | 22.30        | 2%                 |                             |                       | 2%                 | 80,280               | 108,900              |
| 2                        | D                          | 17.29        | 2%                 | OS, O-S4, O-S5, OS-6, OS-7  | 250.76                | 2%                 | 187,624              | 201,393              |

## Basin - SUMMARY TABLE

| Tributary Sub-basin | Area (acres) | Percent Impervious | C <sub>s</sub> | C <sub>100</sub> | t <sub>c</sub> (min) | Q <sub>s</sub> (cfs) | Q <sub>100</sub> (cfs) |
|---------------------|--------------|--------------------|----------------|------------------|----------------------|----------------------|------------------------|
| C-1                 | 22.30        | 2.0%               | 0.08           | 0.35             | 40.1                 | 3.6                  | 26.8                   |
| C-2                 | 2.67         | 2.0%               | 0.08           | 0.35             | 24.9                 | 0.6                  | 4.3                    |
| D                   | 17.29        | 2.0%               | 0.08           | 0.35             | 52.1                 | 2.3                  | 16.8                   |
| OS                  | 124.20       | 2.0%               | 0.08           | 0.35             | 64.5                 | 13.3                 | 97.2                   |
| O-S1                | 5.51         | 3.6%               | 0.09           | 0.36             | 36.5                 | 1.1                  | 7.3                    |
| O-S2                | 180.30       | 2.8%               | 0.09           | 0.35             | 47.4                 | 28.1                 | 192.9                  |
| O-S3                | 1.16         | 18.1%              | 0.21           | 0.45             | 14.0                 | 0.9                  | 3.2                    |
| O-S4                | 67.77        | 2.0%               | 0.08           | 0.35             | 34.0                 | 12.4                 | 91.3                   |
| O-S5                | 6.18         | 2.0%               | 0.08           | 0.35             | 30.7                 | 1.2                  | 8.9                    |
| O-S6                | 35.25        | 2.0%               | 0.08           | 0.35             | 29.3                 | 7.1                  | 52.1                   |
| O-S7                | 17.36        | 2.0%               | 0.08           | 0.35             | 29.5                 | 3.5                  | 25.5                   |


## DESIGN POINT

| DP  | Q <sub>5</sub> | Q <sub>100</sub> |
|-----|----------------|------------------|
|     | Total          | Total            |
| 0   | 28.6           | 214.2            |
| 1   | 3.6            | 26.8             |
| 2.1 | 28.1           | 192.9            |
| 2.2 | 28.5           | 194.5            |
| 2.3 | 28.9           | 197.3            |
| 3   | 1.1            | 7.3              |
| 4   | 12.4           | 91.3             |
| 5   | 1.2            | 8.9              |
| 6.1 | 7.1            | 52.1             |
| 6.2 | 3.5            | 77.4             |
| 7   | 26.7           | 196.2            |
| 8   | 2.3            | 16.8             |

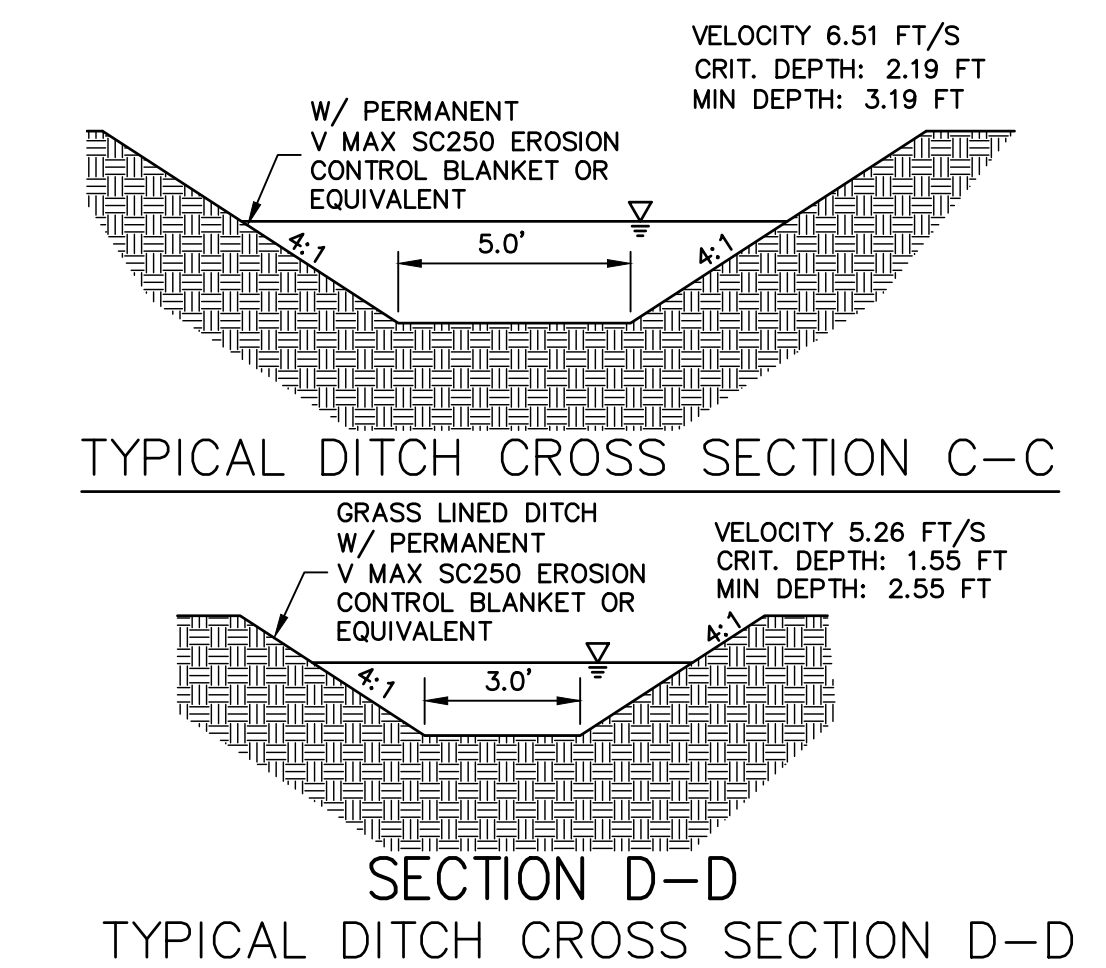

SEE SHEET 4

SEE SHEET 4

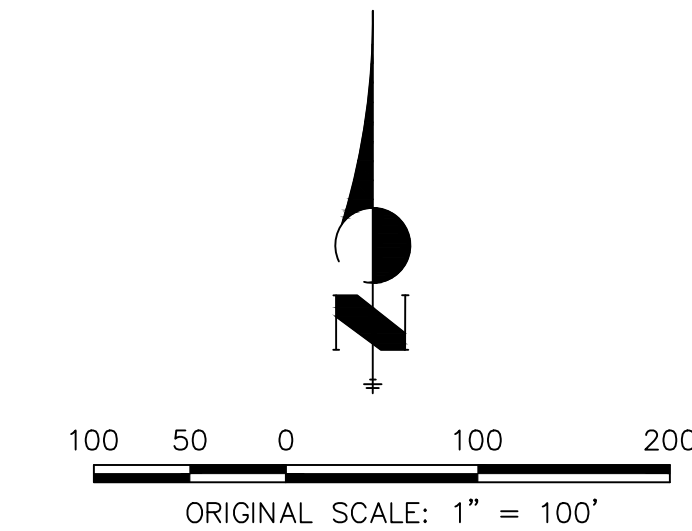

EARLY GRADING - DRAINAGE MAP  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 1/5/22  
 SHEET 3 OF 4




Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com



# EARLY GRADING - DRAINAGE MAP



## LEGEND

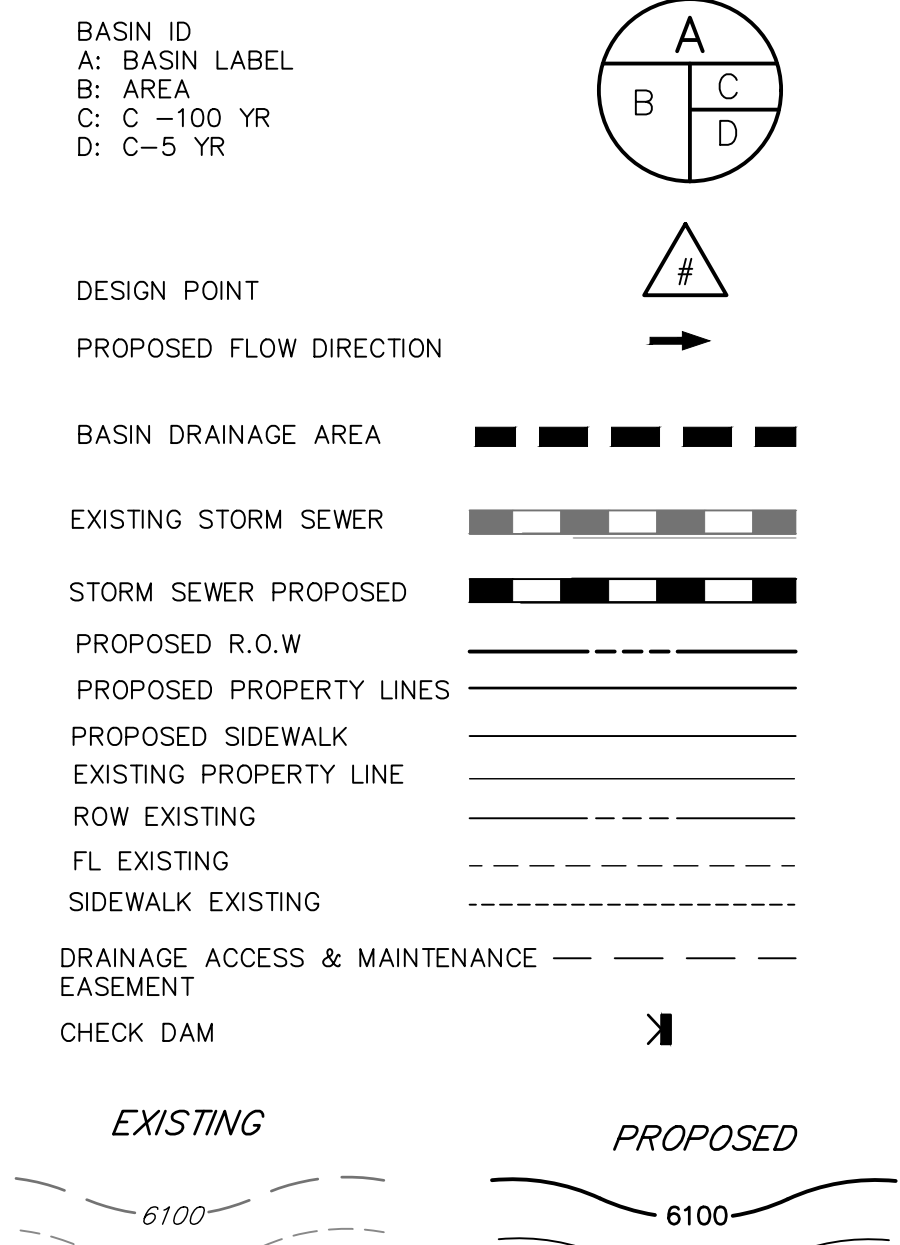

## SEDIMENT BASIN - SUMMARY TABLE

| Temporary Sediment Basin | Contributing On-site Basin | Area (acres) | Percent Impervious | Contributing Off-site Basin | Off-Site Area (acres) | Percent Impervious | Required Volume (cf) | Provided Volume (cf) |
|--------------------------|----------------------------|--------------|--------------------|-----------------------------|-----------------------|--------------------|----------------------|----------------------|
| 1                        | C-1                        | 22.30        | 2%                 |                             |                       | 2%                 | 80,280               | 108,900              |
| 2                        | D                          | 17.29        | 2%                 | OS, O-S4, O-S5, OS-6, OS-7  | 250.76                | 2%                 | 187,624              | 201,393              |



## Basin - Summary Table

| Tributary Sub-basin | Area (acres) | Percent Impervious | C <sub>s</sub> | C <sub>100</sub> | t <sub>c</sub> (min) | Q <sub>s</sub> (cfs) | Q <sub>100</sub> (cfs) |
|---------------------|--------------|--------------------|----------------|------------------|----------------------|----------------------|------------------------|
| C-1                 | 22.30        | 2.0%               | 0.08           | 0.35             | 40.1                 | 3.6                  | 26.8                   |
| C-2                 | 2.67         | 2.0%               | 0.08           | 0.35             | 24.9                 | 0.6                  | 4.3                    |
| D                   | 17.29        | 2.0%               | 0.08           | 0.35             | 52.1                 | 2.3                  | 16.8                   |
| OS                  | 124.20       | 2.0%               | 0.08           | 0.35             | 64.5                 | 13.3                 | 97.2                   |
| O-S1                | 5.51         | 3.6%               | 0.09           | 0.36             | 36.5                 | 1.1                  | 7.3                    |
| O-S2                | 180.30       | 2.8%               | 0.09           | 0.35             | 47.4                 | 28.1                 | 192.9                  |
| O-S3                | 1.16         | 18.1%              | 0.21           | 0.45             | 14.0                 | 0.9                  | 3.2                    |
| O-S4                | 67.77        | 2.0%               | 0.08           | 0.35             | 34.0                 | 12.4                 | 91.3                   |
| O-S5                | 6.18         | 2.0%               | 0.08           | 0.35             | 30.7                 | 1.2                  | 8.9                    |
| O-S6                | 35.25        | 2.0%               | 0.08           | 0.35             | 29.3                 | 7.1                  | 52.1                   |
| O-S7                | 17.36        | 2.0%               | 0.08           | 0.35             | 29.5                 | 3.5                  | 25.5                   |

## DESIGN POINT

| DP  | Q    |       |
|-----|------|-------|
|     | Q5   | Q100  |
| 0   | 28.6 | 214.2 |
| 1   | 3.6  | 26.8  |
| 2.1 | 28.1 | 192.9 |
| 2.2 | 28.5 | 194.5 |
| 2.3 | 28.9 | 197.3 |
| 3   | 1.1  | 7.3   |
| 4   | 12.4 | 91.3  |
| 5   | 1.2  | 8.9   |
| 6.1 | 7.1  | 52.1  |
| 6.2 | 3.5  | 77.4  |
| 7   | 26.7 | 196.2 |
| 8   | 2.3  | 16.8  |

SEE SHEET 3

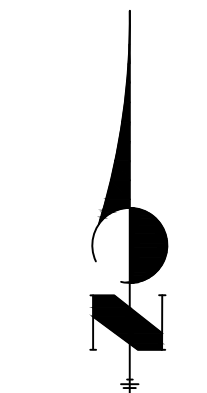

EARLY GRADING - DRAINAGE MAP  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 1/5/22  
 SHEET 4 OF 4



Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com

X:\25188\000\all\25188\Drawings\Sheet\Drawings\25188\000\01 Early Grading.dwg, Early Grading (4), 11/20/22 2:31:28 PM, PC



**Mulching (MU)**

**EC-4**

**Description**

Mulching consists of evenly applying straw, hay, shredded wood mulch, rock, bark or compost to disturbed soils and securing the mulch by crimping, tackifiers, netting or other measures. Mulching helps reduce erosion by protecting bare soil from rainfall impact, increasing infiltration, and reducing runoff. Although often applied in conjunction with temporary or permanent seeding, it can also be used for temporary stabilization of areas that cannot be reseeded due to seasonal constraints.



Photograph MU-1. An area that was recently seeded, mulched, and crimped.

Mulch can be applied either using standard mechanical dry application methods or using hydromulching equipment that hydraulically applies a slurry of water, wood fiber mulch, and often a tackifier.

**Appropriate Uses**

Use mulch in conjunction with seeding to help protect the seedbed and stabilize the soil. Mulch can also be used as a temporary cover on low to mild slopes to help temporarily stabilize disturbed areas where growing season constraints prevent effective reseeding. Disturbed areas should be properly mulched and tacked, or seeded, mulched and tacked promptly after final grade is reached (typically within no longer than 14 days) on portions of the site not otherwise stabilized.

Standard dry mulching is encouraged in most jurisdictions; however, hydromulching may not be allowed in certain jurisdictions or may not be allowed near waterways.

Do not apply mulch during windy conditions.

**Design and Installation**

Prior to mulching, surface-roughen areas by rolling with a crimping or punching type roller or by track walking. Track walking should only be used where other methods are impractical because track walking with heavy equipment typically compacts the soil.

A variety of mulches can be used effectively at construction sites. Consider the following:

| Mulch                    |          |
|--------------------------|----------|
| Functions                |          |
| Erosion Control          | Yes      |
| Sediment Control         | Moderate |
| Site/Material Management | No       |

June 2012 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 MU-1

**EC-2 Temporary and Permanent Seeding (TS/PS)**

Table TS/PS-3. Seeding Dates for Annual and Perennial Grasses

| Seeding Dates            | Annual Grasses<br>(Numbers in table reference species in Table TS/PS-1) |           | Perennial Grasses |      |
|--------------------------|---|-----------|-------------------|------|
|                          | Warm  | Cool      | Warm              | Cool |
| January 1–March 15       |   |           | ✓                 | ✓    |
| March 16–April 30        | 4   | 1,2,3     | ✓                 | ✓    |
| May 1–May 15             | 4   |           | ✓                 |      |
| May 16–June 30           | 4,5,6,7   |           |                   |      |
| July 1–July 15           | 5,6,7   |           |                   |      |
| July 16–August 31        |   |           |                   |      |
| September 1–September 30 |   | 8,9,10,11 |                   |      |
| October 1–December 31    |   |           |                   | ✓    |

**Mulch**

Cover seeded areas with mulch or an appropriate rolled erosion control product to promote establishment of vegetation. Anchor mulch by crimping, netting or use of a non-toxic tackifier. See the Mulching BMP Fact Sheet for additional guidance.

**Maintenance and Removal**

Monitor and observe seeded areas to identify areas of poor growth or areas that fail to germinate. Reseed and mulch these areas, as needed.

An area that has been permanently seeded should have a good stand of vegetation within one growing season if irrigated and within three growing seasons without irrigation in Colorado. Reseed portions of the site that fail to germinate or remain bare after the first growing season.


Seeded areas may require irrigation, particularly during extended dry periods. Targeted weed control may also be necessary.

Protect seeded areas from construction equipment and vehicle access.

TS/PS-6 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

**Concrete Washout Area (CWA)**

**MM-1**

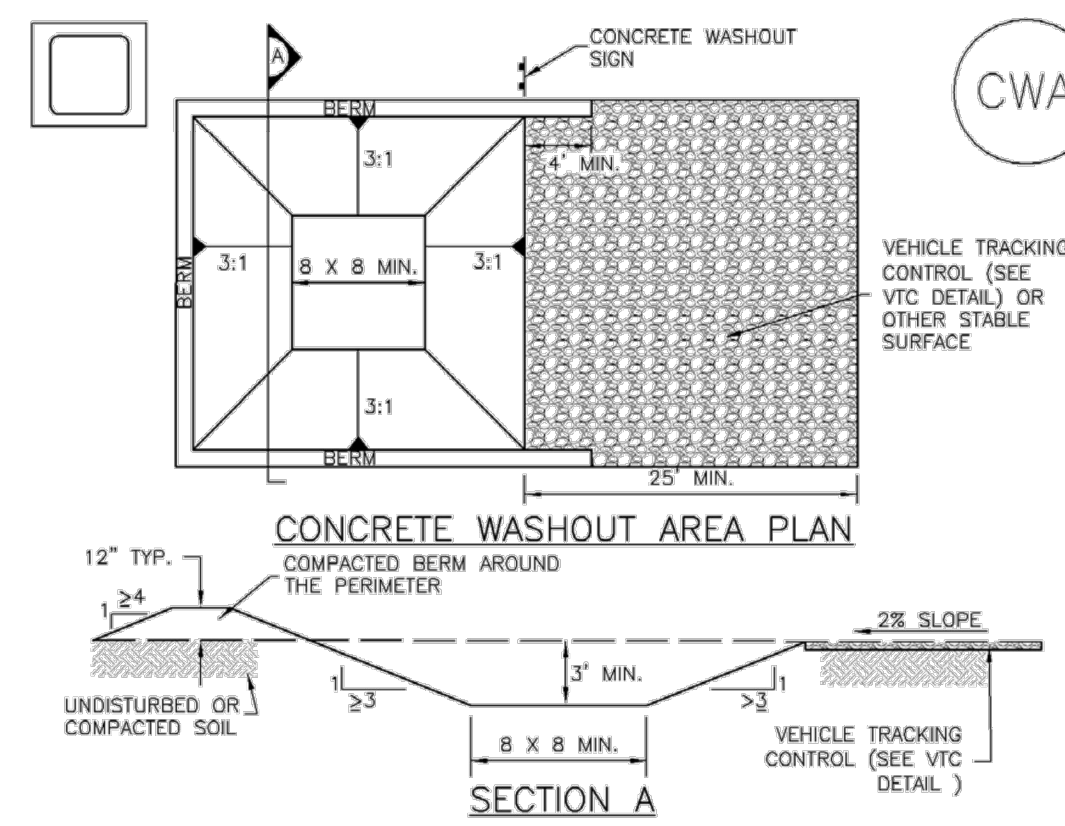

CWA-1. CONCRETE WASHOUT AREA


**CWA INSTALLATION NOTES**

- SEE PLAN VIEW FOR CWA INSTALLATION LOCATION.
- DO NOT LOCATE AN UNLINED CWA WITHIN 400' OF ANY NATURAL DRAINAGE PATHWAY OR WATERBODY. DO NOT LOCATE WITHIN 1,000' OF ANY WELLS OR DRINKING WATER SOURCES. IF SITE CONSTRAINTS MAKE THIS INFASIBLE, OR IF HIGHLY PERMEABLE SOILS EXIST ON SITE, THE CWA MUST BE INSTALLED WITH AN IMPERMEABLE LINER (16 MIL MIN. THICKNESS) OR SURFACE STORAGE ALTERNATIVES USING PREFABRICATED CONCRETE WASHOUT DEVICES OR A LINED ABOVE GROUND STORAGE ARE SHOULD BE USED.
- THE CWA SHALL BE INSTALLED PRIOR TO CONCRETE PLACEMENT ON SITE.
- CWA SHALL INCLUDE A FLAT SUBSURFACE PIT THAT IS AT LEAST 8' BY 8' SLOPES LEADING OUT OF THE SUBSURFACE PIT SHALL BE 3:1 OR FLATTER. THE PIT SHALL BE AT LEAST 3' DEEP.
- BERM SURROUNDING SIDES AND BACK OF THE CWA SHALL HAVE MINIMUM HEIGHT OF 1'.
- VEHICLE TRACKING PAD SHALL BE SLOPED 2% TOWARDS THE CWA.
- SIGNS SHALL BE PLACED AT THE CONSTRUCTION ENTRANCE, AT THE CWA, AND ELSEWHERE AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CWA TO OPERATORS OF CONCRETE TRUCKS AND PUMP RIGS.
- USE EXCAVATED MATERIAL FOR PERIMETER BERM CONSTRUCTION.

November 2010 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 CWA-3

**Sediment Basin (SB)**

**SC-7**

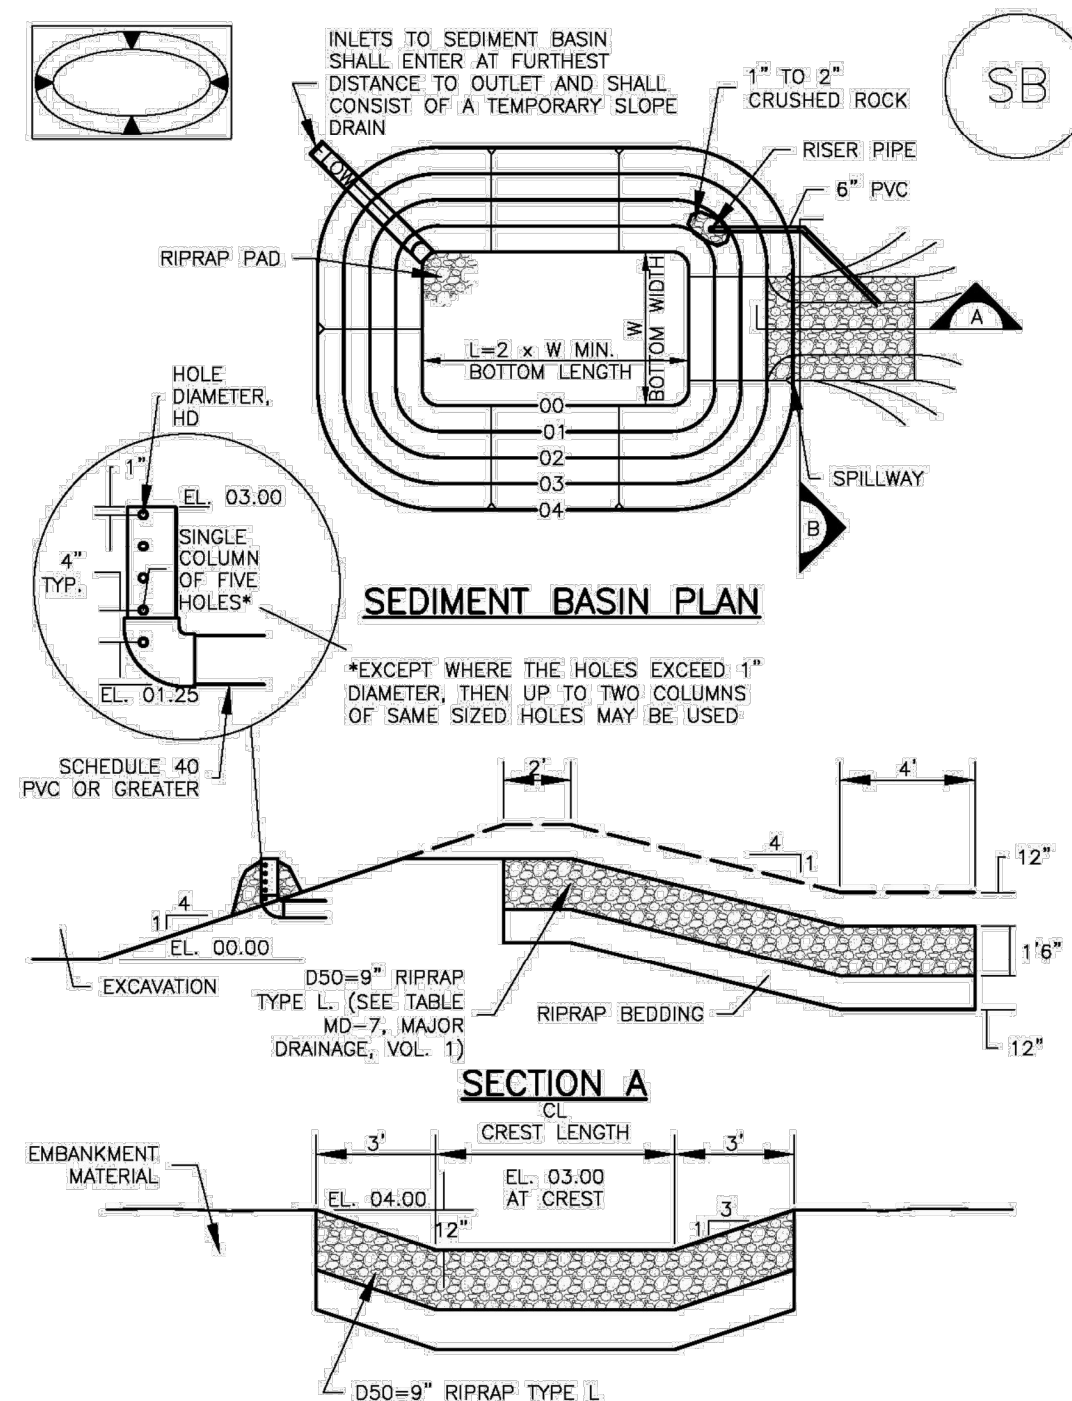

**EC-2 Temporary and Permanent Seeding (TS/PS)**

Table TS/PS-2. Minimum Drill Seeding Rates for Perennial Grasses

| Common Name                           | Botanical Name                       | Growth Season* | Growth Form | Seeds/ Pound | Pounds of PLS/acre |
|---------------------------------------|--------------------------------------|----------------|-------------|--------------|--------------------|
| <b>Alkali Soil Seed Mix</b>           |                                      |                |             |              |                    |
| Alkali sacaton                        | <i>Sporobolus airoides</i>           | Cool           | Bunch       | 1,750,000    | 0.25               |
| Basin wildrye                         | <i>Elymus cinereus</i>               | Cool           | Bunch       | 165,000      | 2.5                |
| Sodar streambank wheatgrass           | <i>Agropyron riparium 'Sodar'</i>    | Cool           | Sod         | 170,000      | 2.5                |
| Jose tall wheatgrass                  | <i>Agropyron elongatum 'Jose'</i>    | Cool           | Bunch       | 79,000       | 7.0                |
| Arriba western wheatgrass             | <i>Agropyron smithii 'Arriba'</i>    | Cool           | Sod         | 110,000      | 5.5                |
| <b>Total</b>                          |                                      |                |             |              | <b>17.75</b>       |
| <b>Fertile Loamy Soil Seed Mix</b>    |                                      |                |             |              |                    |
| Ephraim crested wheatgrass            | <i>Agropyron cristatum 'Ephraim'</i> | Cool           | Sod         | 175,000      | 2.0                |
| Dural hard fescue                     | <i>Festuca ovina 'duriscula'</i>     | Cool           | Bunch       | 565,000      | 1.0                |
| Lincoln smooth brome                  | <i>Bromus inermis leys 'Lincoln'</i> | Cool           | Sod         | 130,000      | 3.0                |
| Sodar streambank wheatgrass           | <i>Agropyron riparium 'Sodar'</i>    | Cool           | Sod         | 170,000      | 2.5                |
| Arriba western wheatgrass             | <i>Agropyron smithii 'Arriba'</i>    | Cool           | Sod         | 110,000      | 7.0                |
| <b>Total</b>                          |                                      |                |             |              | <b>15.5</b>        |
| <b>High Water Table Soil Seed Mix</b> |                                      |                |             |              |                    |
| Meadow foxtail                        | <i>Alopecurus pratensis</i>          | Cool           | Sod         | 900,000      | 0.5                |
| Redtop                                | <i>Agrostis alba</i>                 | Warm           | Open sod    | 5,000,000    | 0.25               |
| Reed canarygrass                      | <i>Phalaris arundinacea</i>          | Cool           | Sod         | 68,000       | 0.5                |
| Lincoln smooth brome                  | <i>Bromus inermis leys 'Lincoln'</i> | Cool           | Sod         | 130,000      | 3.0                |
| Pathfinder switchgrass                | <i>Panicum virgatum 'Pathfinder'</i> | Warm           | Sod         | 389,000      | 1.0                |
| Alkar tall wheatgrass                 | <i>Agropyron elongatum 'Alkar'</i>   | Cool           | Bunch       | 79,000       | 5.5                |
| <b>Total</b>                          |                                      |                |             |              | <b>10.75</b>       |
| <b>Transition Turf Seed Mix*</b>      |                                      |                |             |              |                    |
| Ruebens Canadian bluegrass            | <i>Poa compressa 'Ruebens'</i>       | Cool           | Sod         | 2,500,000    | 0.5                |
| Dural hard fescue                     | <i>Festuca ovina 'duriscula'</i>     | Cool           | Bunch       | 565,000      | 1.0                |
| Citation perennial ryegrass           | <i>Lolium perenne 'Citation'</i>     | Cool           | Sod         | 247,000      | 3.0                |
| Lincoln smooth brome                  | <i>Bromus inermis leys 'Lincoln'</i> | Cool           | Sod         | 130,000      | 3.0                |
| <b>Total</b>                          |                                      |                |             |              | <b>7.5</b>         |

TS/PS-4 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

**SC-7 Sediment Basin (SB)**

| Upstream Drainage Area (rounded to nearest acre), (ac) | Basin Bottom Width (W), (ft) | Spillway Crest Length (CL), (ft) | Hole Diameter (HD), (in) |
|--|------------------------------|----------------------------------|--------------------------|
| 1  | 12 1/2                       | 2                                | 3/4                      |
| 2  | 21                           | 3                                | 1 1/4                    |
| 3  | 28                           | 5                                | 1 1/2                    |
| 4  | 33 1/2                       | 6                                | 1 3/4                    |
| 5  | 38 1/2                       | 8                                | 1 3/4                    |
| 6  | 43                           | 9                                | 1 3/4                    |
| 7  | 47 1/2                       | 11                               | 1 3/4                    |
| 8  | 51                           | 12                               | 1 3/4                    |
| 9  | 55                           | 13                               | 1 3/4                    |
| 10   | 58 1/2                       | 15                               | 1 3/4                    |
| 11   | 61                           | 16                               | 1 3/4                    |
| 12   | 64                           | 18                               | 1 3/4                    |
| 13   | 67 1/2                       | 19                               | 1 3/4                    |
| 14   | 70 1/2                       | 21                               | 1 3/4                    |
| 15   | 73 1/2                       | 22                               | 1 3/4                    |
| 20   | 100                          | 31                               | 1 3/4                    |
| 17 ONSITE ACRES  | 152                          | 103                              | 2                        |
| 253 OFFSITE ACRES                                      |                              |                                  |                          |

TABLE SB-1. SIZING INFORMATION FOR STANDARD SEDIMENT BASIN

**SEDIMENT BASIN INSTALLATION NOTES**

- SEE PLAN VIEW FOR:
  - LOCATION OF SEDIMENT BASIN.
  - TYPE OF BASIN (STANDARD BASIN OR NONSTANDARD BASIN).
  - FOR STANDARD BASIN, BOTTOM WIDTH W, CREST LENGTH CL, AND HOLE DIAMETER, HD.
  - FOR NONSTANDARD BASIN, SEE CONSTRUCTION DRAWINGS FOR DESIGN OF BASIN INCLUDING RISER HEIGHT H, NUMBER OF COLUMNS N, HOLE DIAMETER HD AND PIPE DIAMETER D.
- FOR STANDARD BASIN, BOTTOM DIMENSION MAY BE MODIFIED AS LONG AS BOTTOM AREA IS NOT REDUCED.
- SEDIMENT BASINS SHALL BE INSTALLED PRIOR TO ANY OTHER LAND-DISTURBING ACTIVITY THAT RELIES ON BASINS AS A STORMWATER CONTROL.
- EMBANKMENT MATERIAL SHALL CONSIST OF SOIL FREE OF DEBRIS, ORGANIC MATERIAL, AND ROCKS OR CONCRETE GREATER THAN 3 INCHES AND SHALL HAVE A MINIMUM OF 15 PERCENT BY WEIGHT PASSING THE NO. 200 SIEVE.
- EMBANKMENT MATERIAL SHALL BE COMPACTED TO AT LEAST 95 PERCENT OF MAXIMUM DENSITY IN ACCORDANCE WITH ASTM D698.
- PIPE SCH 40 OR GREATER SHALL BE USED.
- THE DETAILS SHOWN ON THESE SHEETS PERTAIN TO STANDARD SEDIMENT BASIN(S) FOR DRAINAGE AREAS LESS THAN 15 ACRES. SEE CONSTRUCTION DRAWINGS FOR EMBANKMENT, STORAGE VOLUME, SPILLWAY, OUTLET, AND OUTLET PROTECTION DETAILS FOR ANY SEDIMENT BASIN(S) THAT HAVE BEEN INDIVIDUALLY DESIGNED FOR DRAINAGE AREAS LARGER THAN 15 ACRES.

SB-6 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 August 2013

**Temporary and Permanent Seeding (TS/PS)**

**EC-2**

Table TS/PS-2. Minimum Drill Seeding Rates for Perennial Grasses (cont.)

| Common Name                                | Botanical Name                          | Growth Season* | Growth Form            | Seeds/ Pound | Pounds of PLS/acre |
|--|---|----------------|------------------------|--------------|--------------------|
| <b>Sandy Soil Seed Mix</b>                 |   |                |                        |              |                    |
| Blue grama                                 | <i>Bouteloua gracilis</i>               | Warm           | Sod-forming bunchgrass | 825,000      | 0.5                |
| Camper litle bluestem                      | <i>Schizachyrium scoparium 'Camper'</i> | Warm           | Bunch                  | 240,000      | 1.0                |
| Prairie sandreed                           | <i>Calamovilfa longifolia</i>           | Warm           | Open sod               | 274,000      | 1.0                |
| Sand dropseed                              | <i>Sporobolus cryptandrus</i>           | Cool           | Bunch                  | 5,298,000    | 0.25               |
| Vaughn sideoats grama                      | <i>Bouteloua curtipendula 'Vaughn'</i>  | Warm           | Sod                    | 191,000      | 2.0                |
| Arriba western wheatgrass                  | <i>Agropyron smithii 'Arriba'</i>       | Cool           | Sod                    | 110,000      | 5.5                |
| <b>Total</b>                               |   |                |                        |              | <b>10.25</b>       |
| <b>Heavy Clay, Rocky Foothill Seed Mix</b> |   |                |                        |              |                    |
| Ephraim crested wheatgrass*                | <i>Agropyron cristatum 'Ephraim'</i>    | Cool           | Sod                    | 175,000      | 1.5                |
| Oahu Intermediate wheatgrass               | <i>Agropyron intermedium 'Oahu'</i>     | Cool           | Sod                    | 115,000      | 5.5                |
| Vaughn sideoats grama*                     | <i>Bouteloua curtipendula 'Vaughn'</i>  | Warm           | Sod                    | 191,000      | 2.0                |
| Lincoln smooth brome                       | <i>Bromus inermis leys 'Lincoln'</i>    | Cool           | Sod                    | 130,000      | 3.0                |
| Arriba western wheatgrass                  | <i>Agropyron smithii 'Arriba'</i>       | Cool           | Sod                    | 110,000      | 5.5                |
| <b>Total</b>                               |   |                |                        |              | <b>17.5</b>        |

- \* All of the above seeding mixes and rates are based on drill seeding followed by crimped straw mulch. These rates should be doubled if seed is broadcast and should be increased by 50 percent if the seeding is done using a Britton Drill or is applied through hydraulic seeding. Hydraulic seeding may be substituted for drilling only where slopes are steeper than 3:1. If hydraulic seeding is used, hydraulic mulching should be done as a separate operation.
- † See Table TS/PS-3 for seeding dates.
- ‡ If site is to be irrigated, the transition turf seed rates should be doubled.
- § Crested wheatgrass should not be used on slopes steeper than 6H to 1V.
- ¶ Can substitute 0.5 lbs PLS of blue grama for the 2.0 lbs PLS of Vaughn sideoats grama.

June 2012 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 TS/PS-5

**Sediment Basin (SB)**

**SC-7**

**SEDIMENT BASIN MAINTENANCE NOTES**

- INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.
- FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.
- WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.
- SEDIMENT ACCUMULATED IN BASIN SHALL BE REMOVED AS NEEDED TO MAINTAIN BMP EFFECTIVENESS, TYPICALLY WHEN SEDIMENT DEPTH REACHES ONE FOOT (I.E., TWO FEET BELOW THE SPILLWAY CREST).
- SEDIMENT BASINS ARE TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND GRASS COVER IS ACCEPTED BY THE LOCAL JURISDICTION.
- WHEN SEDIMENT BASINS ARE REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.

(DETAILS ADAPTED FROM DOUGLAS COUNTY, COLORADO)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

August 2013 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 SB-7

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, OR ENGINEERING APPROVES THEIR USE, THESE DRAWINGS ARE DESIGNATED BY WRITTEN AUTHORIZATION.  
 PREPARED FOR  
**SR LAND, LLC**  
 20 BOULDER CRESCENT  
 SUITE 201  
 COLORADO SPRINGS, CO 80903  
 JAMES F. MORLEY  
 (719) 471-1742  
**J.R. ENGINEERING**  
 A Wehrman Company  
 Centennial 303-740-9888 • Colorado Springs 719-583-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com


HOMESTEAD NORTH AT STERLING RANCH  
 DETAIL  
 SHEET 8 OF 10  
 JOB NO. 25188.00



# DRAINAGE MAP

## LEGEND

BASIN ID  
 A: BASIN LABEL  
 B: AREA  
 C: C-100 YR  
 D: C-5 YR



DESIGN POINT  
 PROPOSED FLOW DIRECTION



BASIN DRAINAGE AREA




EXISTING STORM SEWER



STORM SEWER PROPOSED



PROPOSED R.O.W



PROPOSED PROPERTY LINES  
 PROPOSED SIDEWALK  
 EXISTING PROPERTY LINE  
 ROW EXISTING  
 FL EXISTING  
 SIDEWALK EXISTING  
 DRAINAGE ACCESS & MAINTENANCE EASEMENT


EXISTING  
 PROPOSED  
 6100

### DESIGN POINT SUMMARY TABLE

| DP   | Q5    |       | Q100  |       |
|------|-------|-------|-------|-------|
|      | Total | Total | Total | Total |
| 1a   | 6.9   | 14.7  |       |       |
| 2a   | 8.3   | 20.5  |       |       |
| 5a   | 9.5   | 26.1  |       |       |
| 7a   | 10.4  | 29.9  |       |       |
| 2a   | 6.4   | 13.3  |       |       |
| 1.1  | 13.0  | 18.7  |       |       |
| 4a   | 6.6   | 15.2  |       |       |
| 1.2  | 23.5  | 48.1  |       |       |
| 6a   | 10.7  | 18.5  |       |       |
| 1.3  | 43.6  | 94.5  |       |       |
| 8a   | 11.3  | 20.0  |       |       |
| 1.4  | 44.4  | 96.2  |       |       |
| 9A   | 21.6  | 103.0 |       |       |
| 1.1b | 5.5   | 12.5  |       |       |
| 1.2b | 3.5   | 7.4   |       |       |
| 2.1  | 8.7   | 17.5  |       |       |
| 1.3b | 1.0   | 2.2   |       |       |
| 2b   | 2.4   | 6.8   |       |       |
| 3b   | 0.9   | 1.7   |       |       |
| 4b   | 7.1   | 16.8  |       |       |
| 6b   | 10.3  | 26.5  |       |       |
| 9b   | 12.1  | 30.3  |       |       |
| 5b   | 4.3   | 8.9   |       |       |
| 7b   | 7.3   | 14.9  |       |       |
| 2.2  | 16.3  | 32.9  |       |       |
| 2.3  | 23.5  | 47.3  |       |       |
| 8b   | 5.0   | 13.1  |       |       |
| 2.4  | 35.6  | 77.6  |       |       |
| 10b  | 5.7   | 14.3  |       |       |
| 2.5  | 42.5  | 91.5  |       |       |
| 11b  | 0.9   | 3.7   |       |       |
| 12b  | 1.5   | 4.1   |       |       |
| 2.6  | 46.1  | 102.6 |       |       |
| 1c   | 5.4   | 11.4  |       |       |
| 2.3c | 7.1   | 14.9  |       |       |
| 2.1c | 0.8   | 1.6   |       |       |
| 2.2c | 9.8   | 20.1  |       |       |
| 4.2c | 5.9   | 13.2  |       |       |
| 3.1  | 6.5   | 11.7  |       |       |
| 4c   | 18.9  | 41.9  |       |       |
| 3.1c | 1.2   | 2.4   |       |       |
| 3.2  | 7.9   | 12.6  |       |       |
| 3.2c | 3.6   | 7.9   |       |       |
| 3.3  | 14.3  | 24.1  |       |       |
| 3.4  | 31.5  | 63.1  |       |       |
| 5c   | 4.1   | 8.8   |       |       |
| 3.5  | 34.5  | 69.7  |       |       |
| 6c   | 2.5   | 8.8   |       |       |
| 3.6  | 41.4  | 78.9  |       |       |
| 1o   | 0.8   | 6.0   |       |       |
| 1d   | 2.4   | 6.0   |       |       |
| 1.1d | 3.2   | 11.6  |       |       |
| 2d   | 2.5   | 6.1   |       |       |
| 1.2d | 5.7   | 17.7  |       |       |
| 3d   | 0.6   | 1.2   |       |       |
| 4d   | 1.0   | 1.1   |       |       |
| 1.3d | 0.5   | 2.2   |       |       |
| 1.4d | 6.4   | 19.2  |       |       |
| 2o   | 27.1  | 190.9 |       |       |
| 6d   | 2.5   | 4.6   |       |       |
| 5d   | 3.1   | 6.1   |       |       |
| 1.5d | 29.2  | 195.0 |       |       |
| 1.6d | 32.6  | 205.3 |       |       |
| 3o   | 1.7   | 12.6  |       |       |
| 8d   | 2.5   | 14.4  |       |       |
| 7d   | 2.8   | 4.7   |       |       |
| 2.1d | 3.5   | 16.1  |       |       |
| 1.7d | 36.0  | 220.9 |       |       |
| 5    | 56.0  | 264.1 |       |       |

### BASIN SUMMARY TABLE

| Tributary Sub-basin | Area (acres) | Percent Impervious | C5   | C100 | tc (min) | Q5 (cfs) | Q100 (cfs) |
|---------------------|--------------|--------------------|------|------|----------|----------|------------|
| A1                  | 3.67         | 52%                | 0.51 | 0.64 | 13.3     | 6.9      | 14.7       |
| A2                  | 3.21         | 57%                | 0.54 | 0.67 | 13.7     | 6.4      | 13.3       |
| A3                  | 4.79         | 50%                | 0.49 | 0.63 | 13.9     | 8.5      | 18.4       |
| A4                  | 3.56         | 55%                | 0.53 | 0.66 | 14.0     | 6.8      | 14.2       |
| A5                  | 5.43         | 50%                | 0.49 | 0.62 | 11.1     | 10.5     | 22.6       |
| A6                  | 3.95         | 53%                | 0.52 | 0.65 | 12.5     | 7.7      | 16.2       |
| A7                  | 1.97         | 15%                | 0.19 | 0.43 | 16.5     | 1.3      | 4.8        |
| A8                  | 0.46         | 52%                | 0.50 | 0.66 | 5.0      | 1.2      | 2.6        |
| A9                  | 2.78         | 16%                | 0.20 | 0.43 | 13.4     | 2.1      | 7.4        |
| B1.1                | 3.36         | 45%                | 0.45 | 0.60 | 13.4     | 5.5      | 12.5       |
| B1.2                | 1.81         | 54%                | 0.52 | 0.65 | 12.8     | 3.5      | 7.4        |
| B1.3                | 0.47         | 47%                | 0.46 | 0.63 | 8.1      | 1.0      | 2.2        |
| B2                  | 0.82         | 58%                | 0.55 | 0.69 | 5.0      | 2.3      | 4.9        |
| B3                  | 0.24         | 79%                | 0.73 | 0.83 | 5.0      | 0.9      | 1.7        |
| B4                  | 4.21         | 39%                | 0.40 | 0.57 | 9.5      | 7.1      | 16.8       |
| B5                  | 1.75         | 58%                | 0.55 | 0.68 | 7.8      | 4.3      | 8.9        |
| B6                  | 3.66         | 57%                | 0.55 | 0.68 | 6.6      | 9.5      | 19.9       |
| B7                  | 1.28         | 60%                | 0.57 | 0.69 | 8.9      | 3.1      | 6.4        |
| B8                  | 2.30         | 55%                | 0.53 | 0.66 | 9.6      | 5.1      | 10.7       |
| B9                  | 3.69         | 65%                | 0.50 | 0.64 | 13.1     | 6.9      | 14.8       |
| B10                 | 0.22         | 80%                | 0.73 | 0.83 | 5.0      | 0.8      | 1.6        |
| B11                 | 1.65         | 15%                | 0.16 | 0.40 | 16.7     | 0.9      | 3.7        |
| B12                 | 2.40         | 40%                | 0.30 | 0.50 | 39.8     | 1.5      | 4.1        |
| C1                  | 2.82         | 69%                | 0.52 | 0.65 | 13.1     | 5.4      | 11.4       |
| C2.1                | 0.20         | 91%                | 0.82 | 0.90 | 5.0      | 0.8      | 1.6        |
| C2.2                | 4.69         | 73%                | 0.56 | 0.68 | 12.8     | 9.9      | 20.3       |
| C2.3                | 0.83         | 67%                | 0.54 | 0.68 | 10.1     | 1.9      | 3.9        |
| C3.1                | 0.35         | 73%                | 0.68 | 0.79 | 5.0      | 1.2      | 2.4        |
| C3.2                | 1.46         | 71%                | 0.56 | 0.68 | 8.4      | 3.6      | 7.4        |
| C4.1                | 6.35         | 65%                | 0.49 | 0.63 | 12.1     | 12.0     | 25.8       |
| C4.2                | 3.44         | 59%                | 0.46 | 0.61 | 12.7     | 5.9      | 13.2       |
| C5                  | 0.16         | 81%                | 0.74 | 0.84 | 7.2      | 0.6      | 1.0        |
| C6                  | 2.48         | 21%                | 0.22 | 0.45 | 6.8      | 2.5      | 8.8        |
| D1                  | 1.83         | 39%                | 0.39 | 0.58 | 16.7     | 2.4      | 6.0        |
| D2                  | 1.77         | 43%                | 0.43 | 0.61 | 16.3     | 2.5      | 6.1        |
| D3                  | 0.18         | 68%                | 0.63 | 0.76 | 5.4      | 0.6      | 1.2        |
| D4                  | 0.19         | 57%                | 0.54 | 0.70 | 6.3      | 0.5      | 1.1        |
| D5                  | 0.91         | 77%                | 0.71 | 0.82 | 6.0      | 3.1      | 6.1        |
| D6                  | 0.83         | 69%                | 0.64 | 0.77 | 6.4      | 2.5      | 5.2        |
| D7                  | 0.75         | 79%                | 0.72 | 0.83 | 5.0      | 2.8      | 5.4        |
| D8                  | 0.72         | 69%                | 0.64 | 0.77 | 5.0      | 2.4      | 4.8        |
| OS1                 | 2.85         | 2%                 | 0.08 | 0.35 | 14.5     | 0.8      | 6.0        |
| OS2                 | 179.61       | 2%                 | 0.08 | 0.35 | 47.4     | 27.1     | 190.9      |
| OS3                 | 11.99        | 2%                 | 0.08 | 0.35 | 47.6     | 1.7      | 12.6       |

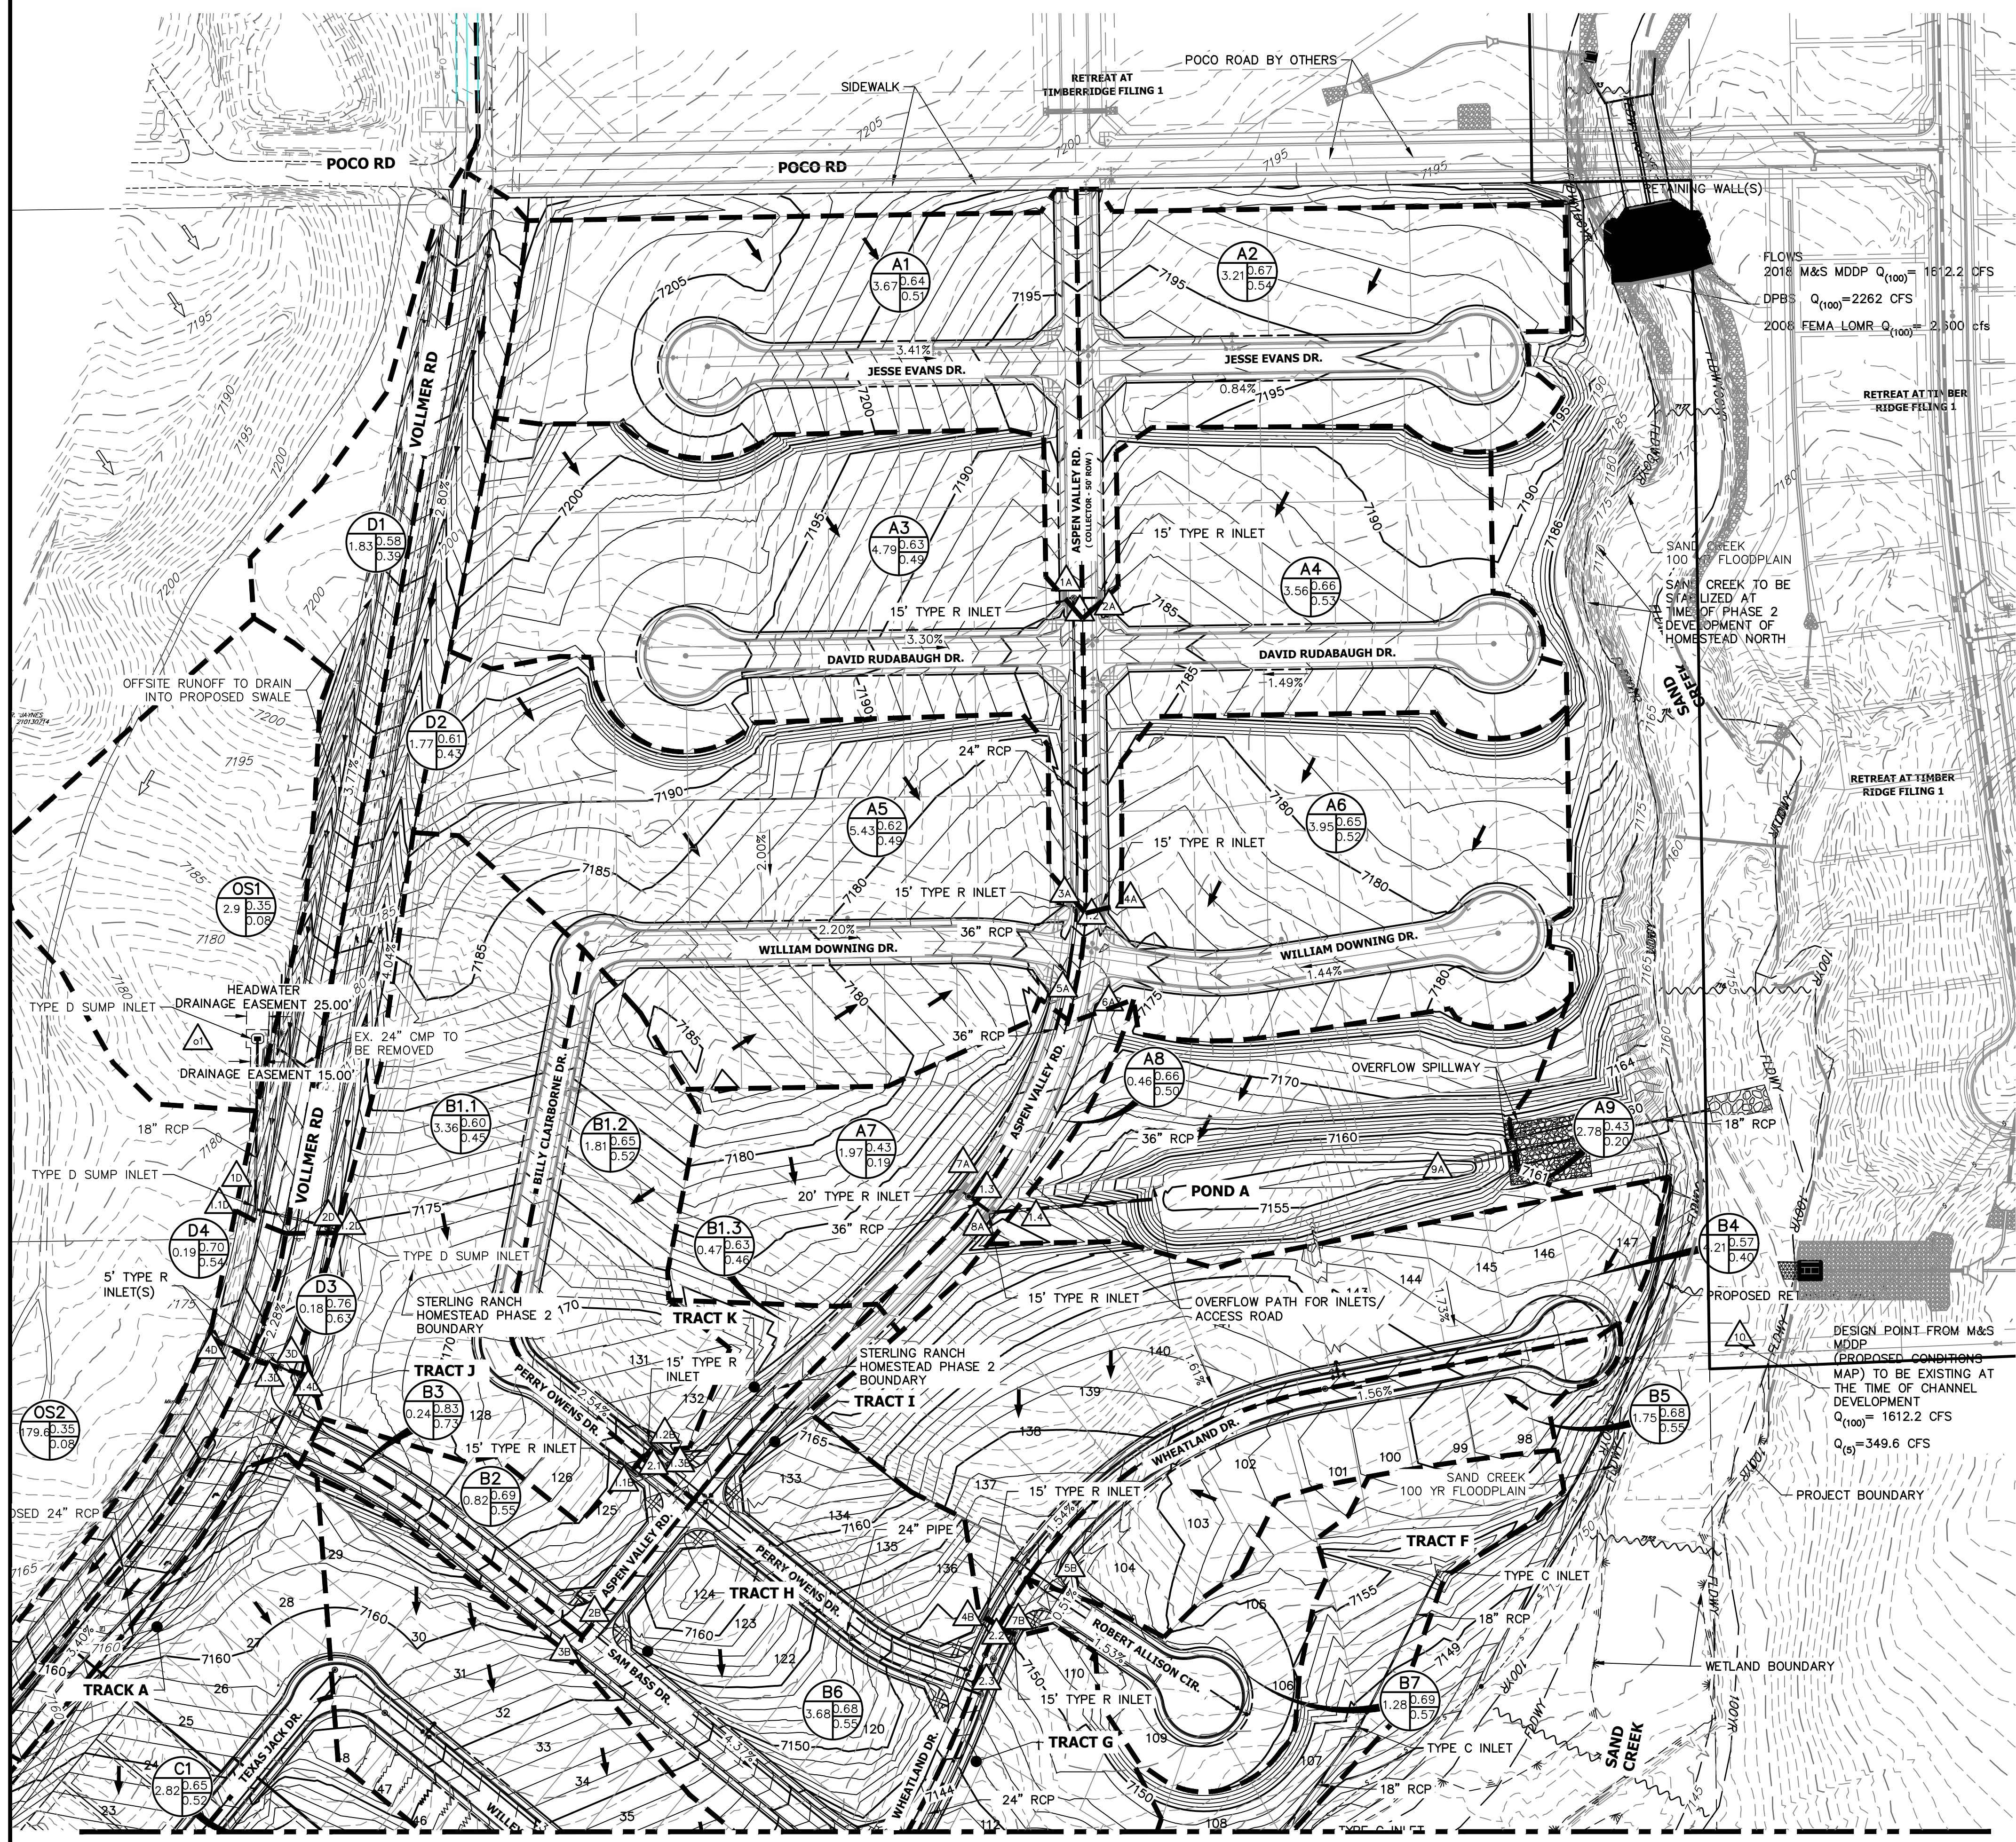

SEE SHEET 2



DRAINAGE MAP  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 3/23/22  
 SHEET 1 OF 2


**J-R ENGINEERING**  
 A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com




# DRAINAGE MAP

SEE SHEET 1

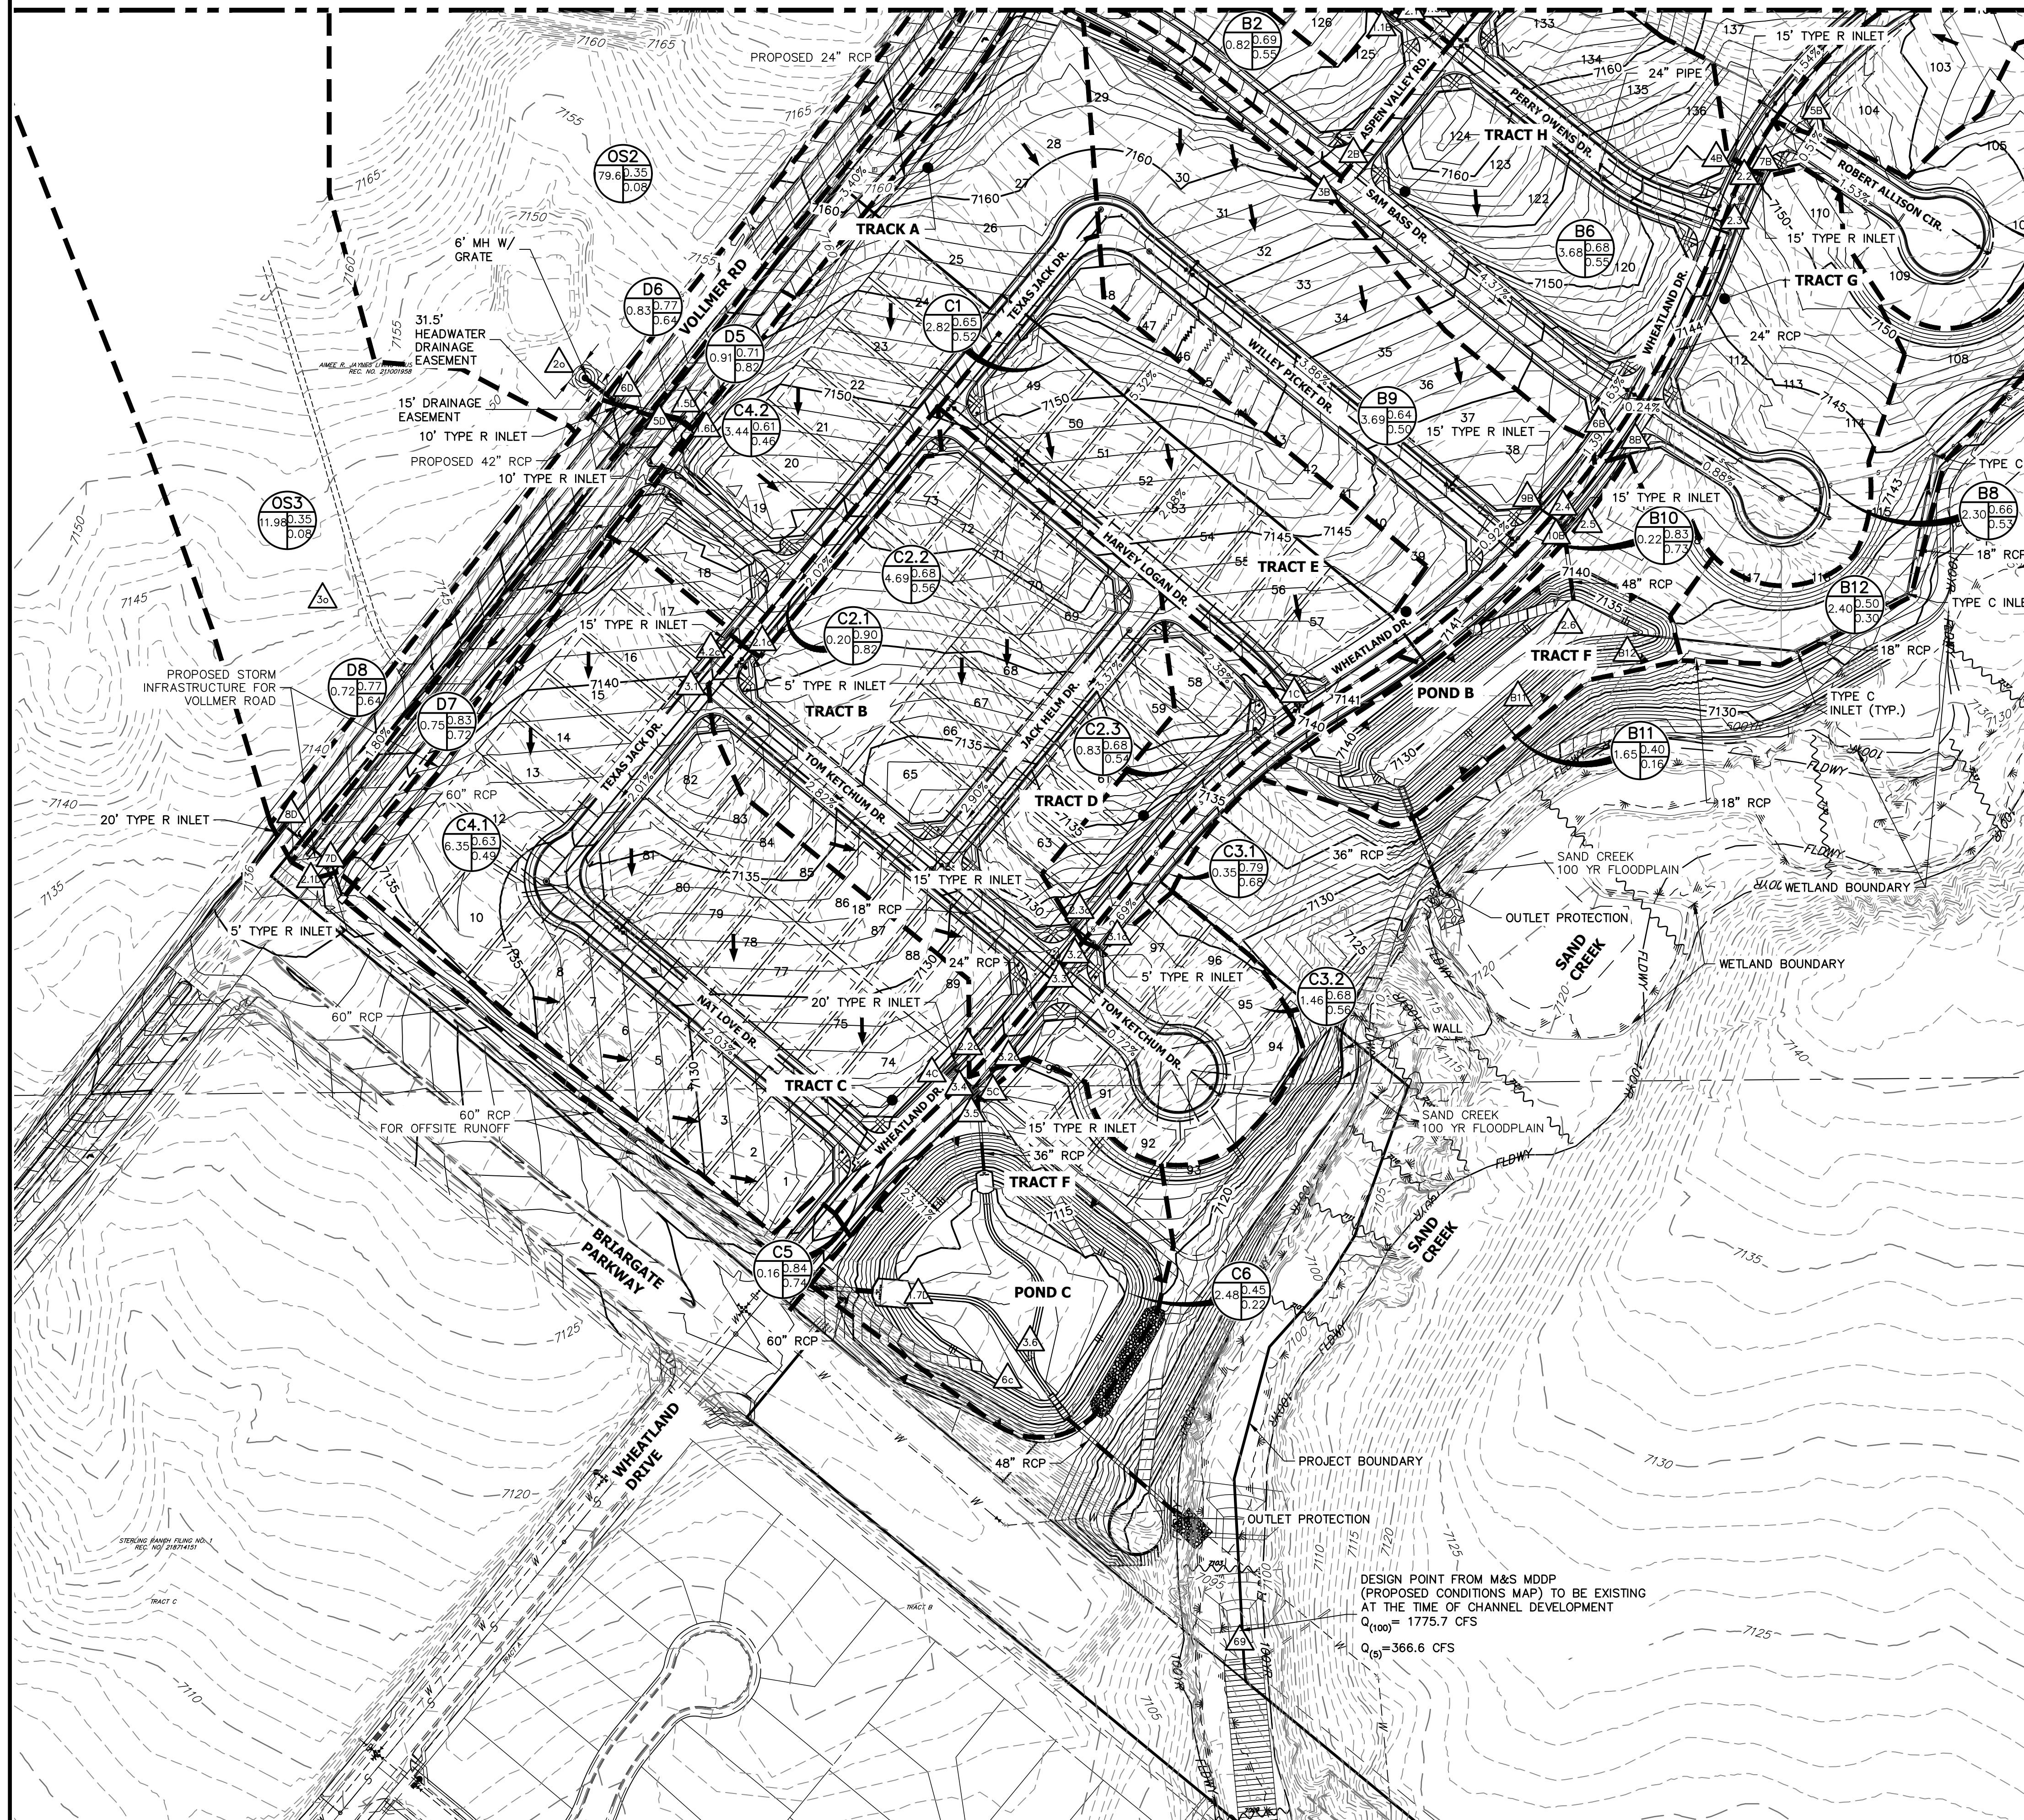


## LEGEND

BASIN ID  
 A: BASIN LABEL  
 B: AREA  
 C: C - 100 YR  
 D: C - 5 YR



DESIGN POINT  
 PROPOSED FLOW DIRECTION



BASIN DRAINAGE AREA  
 EXISTING STORM SEWER  
 STORM SEWER PROPOSED




PROPOSED R.O.W  
 PROPOSED PROPERTY LINES  
 PROPOSED SIDEWALK  
 EXISTING PROPERTY LINE  
 ROW EXISTING  
 FL EXISTING  
 SIDEWALK EXISTING  
 DRAINAGE ACCESS & MAINTENANCE  
 EASEMENT



| DP   | Q5    |       | Q100  |       |
|------|-------|-------|-------|-------|
|      | Total | Total | Total | Total |
| 1a   | 6.9   | 14.7  |       |       |
| 3a   | 8.3   | 20.5  |       |       |
| 5a   | 9.5   | 26.1  |       |       |
| 7a   | 10.4  | 29.9  |       |       |
| 2a   | 6.4   | 13.3  |       |       |
| 1.1  | 13.0  | 18.7  |       |       |
| 4a   | 6.6   | 15.2  |       |       |
| 1.2  | 23.5  | 48.1  |       |       |
| 6a   | 10.7  | 18.5  |       |       |
| 1.3  | 43.6  | 94.5  |       |       |
| 8a   | 11.3  | 20.0  |       |       |
| 1.4  | 44.4  | 96.2  |       |       |
| 9a   | 21.6  | 103.0 |       |       |
| 1.1b | 5.5   | 12.5  |       |       |
| 1.2b | 3.5   | 7.4   |       |       |
| 2.1  | 8.7   | 17.5  |       |       |
| 1.3b | 1.0   | 2.2   |       |       |
| 2b   | 2.4   | 6.8   |       |       |
| 3b   | 0.9   | 1.7   |       |       |
| 4b   | 7.1   | 16.8  |       |       |
| 6b   | 10.3  | 26.5  |       |       |
| 9b   | 12.1  | 30.3  |       |       |
| 5b   | 4.3   | 8.9   |       |       |
| 7b   | 7.3   | 14.9  |       |       |
| 2.2  | 16.3  | 32.9  |       |       |
| 2.3  | 23.5  | 47.3  |       |       |
| 8b   | 5.0   | 13.1  |       |       |
| 2.4  | 35.6  | 77.6  |       |       |
| 10b  | 5.7   | 14.3  |       |       |
| 2.5  | 42.5  | 91.5  |       |       |
| 11b  | 0.9   | 3.7   |       |       |
| 12b  | 1.5   | 4.1   |       |       |
| 2.6  | 46.1  | 102.6 |       |       |
| 1c   | 5.4   | 11.4  |       |       |
| 2.3c | 7.1   | 14.9  |       |       |
| 2.1c | 0.8   | 1.6   |       |       |
| 2.2c | 9.8   | 20.1  |       |       |
| 4.2c | 5.9   | 13.2  |       |       |
| 3.1  | 6.5   | 11.7  |       |       |
| 4c   | 18.9  | 41.9  |       |       |
| 3.1c | 1.2   | 2.4   |       |       |
| 3.2  | 7.9   | 12.6  |       |       |
| 3.2c | 3.6   | 7.9   |       |       |
| 3.3  | 14.3  | 24.1  |       |       |
| 3.4  | 31.5  | 63.1  |       |       |
| 5c   | 4.1   | 8.8   |       |       |
| 3.5  | 34.5  | 69.7  |       |       |
| 6c   | 2.5   | 8.8   |       |       |
| 3.6  | 41.4  | 78.9  |       |       |
| 1e   | 0.8   | 6.0   |       |       |
| 1d   | 2.4   | 6.0   |       |       |
| 1.1d | 3.2   | 11.6  |       |       |
| 2d   | 2.5   | 6.1   |       |       |
| 1.2d | 5.7   | 17.7  |       |       |
| 3d   | 0.6   | 1.2   |       |       |
| 4d   | 1.0   | 1.1   |       |       |
| 1.3d | 0.5   | 2.2   |       |       |
| 1.4d | 6.4   | 19.2  |       |       |
| 2e   | 27.1  | 190.9 |       |       |
| 6d   | 2.5   | 4.6   |       |       |
| 5d   | 3.1   | 6.1   |       |       |
| 1.5d | 29.2  | 195.0 |       |       |
| 1.6d | 32.6  | 205.3 |       |       |
| 3e   | 1.7   | 12.6  |       |       |
| 8d   | 2.5   | 14.4  |       |       |
| 7d   | 2.8   | 4.7   |       |       |
| 2.1d | 3.5   | 16.1  |       |       |
| 1.7d | 36.0  | 220.9 |       |       |
| 5    | 56.0  | 264.1 |       |       |

| Tributary | Area (acres) | Percent Impervious | C5   | C100 | tc (min) | Q5    | Q100  |
|-----------|--------------|--------------------|------|------|----------|-------|-------|
|           |              |                    |      |      |          | (cfs) | (cfs) |
| Sub-basin |              |                    |      |      |          |       |       |
| A1        | 3.67         | 52%                | 0.51 | 0.64 | 13.3     | 6.9   | 14.7  |
| A2        | 3.21         | 57%                | 0.54 | 0.67 | 13.7     | 6.4   | 13.3  |
| A3        | 4.79         | 50%                | 0.49 | 0.63 | 13.9     | 8.5   | 18.4  |
| A4        | 3.56         | 55%                | 0.53 | 0.66 | 14.0     | 6.8   | 14.2  |
| A5        | 5.43         | 50%                | 0.49 | 0.62 | 11.1     | 10.5  | 22.6  |
| A6        | 3.95         | 53%                | 0.52 | 0.65 | 12.5     | 7.7   | 16.2  |
| A7        | 1.97         | 15%                | 0.19 | 0.43 | 16.5     | 1.3   | 4.8   |
| A8        | 0.46         | 52%                | 0.50 | 0.66 | 5.0      | 1.2   | 2.6   |
| A9        | 2.78         | 16%                | 0.20 | 0.43 | 13.4     | 2.1   | 7.4   |
| B1.1      | 3.36         | 45%                | 0.45 | 0.60 | 13.4     | 5.5   | 12.5  |
| B1.2      | 1.81         | 54%                | 0.52 | 0.65 | 12.8     | 3.5   | 7.4   |
| B1.3      | 0.47         | 47%                | 0.46 | 0.63 | 8.1      | 1.0   | 2.2   |
| B2        | 0.82         | 58%                | 0.55 | 0.69 | 5.0      | 2.3   | 4.9   |
| B3        | 0.24         | 79%                | 0.73 | 0.83 | 5.0      | 0.9   | 1.7   |
| B4        | 4.21         | 39%                | 0.40 | 0.57 | 9.5      | 7.1   | 16.8  |
| B5        | 1.75         | 58%                | 0.55 | 0.68 | 7.8      | 4.3   | 8.9   |
| B6        | 3.66         | 57%                | 0.55 | 0.68 | 6.6      | 9.5   | 19.9  |
| B7        | 1.28         | 60%                | 0.57 | 0.69 | 8.9      | 3.1   | 6.4   |
| B8        | 2.30         | 55%                | 0.53 | 0.66 | 9.6      | 5.1   | 10.7  |
| B9        | 3.69         | 65%                | 0.50 | 0.64 | 13.1     | 6.9   | 14.8  |
| B10       | 0.22         | 80%                | 0.73 | 0.83 | 5.0      | 0.8   | 1.6   |
| B11       | 1.65         | 15%                | 0.16 | 0.40 | 16.7     | 0.9   | 3.7   |
| B12       | 2.40         | 40%                | 0.30 | 0.50 | 39.8     | 1.5   | 4.1   |
| C1        | 2.82         | 69%                | 0.52 | 0.65 | 13.1     | 5.4   | 11.4  |
| C2.1      | 0.20         | 91%                | 0.82 | 0.90 | 5.0      | 0.8   | 1.6   |
| C2.2      | 4.69         | 73%                | 0.56 | 0.68 | 12.8     | 9.9   | 20.3  |
| C2.3      | 0.83         | 67%                | 0.54 | 0.68 | 10.1     | 1.9   | 3.9   |
| C3.1      | 0.35         | 73%                | 0.68 | 0.79 | 5.0      | 1.2   | 2.4   |
| C3.2      | 1.46         | 71%                | 0.56 | 0.68 | 8.4      | 3.6   | 7.4   |
| C4.1      | 6.35         | 65%                | 0.49 | 0.63 | 12.1     | 12.0  | 25.8  |
| C4.2      | 3.44         | 59%                | 0.46 | 0.61 | 12.7     | 5.9   | 13.2  |
| C5        | 0.16         | 81%                | 0.74 | 0.84 | 7.2      | 0.6   | 1.0   |
| C6        | 2.48         | 21%                | 0.22 | 0.45 | 6.8      | 2.5   | 8.8   |
| D1        | 1.83         | 39%                | 0.39 | 0.58 | 16.7     | 2.4   | 6.0   |
| D2        | 1.77         | 43%                | 0.43 | 0.61 | 16.3     | 2.5   | 6.1   |
| D3        | 0.18         | 68%                | 0.63 | 0.76 | 5.4      | 0.6   | 1.2   |
| D4        | 0.19         | 57%                | 0.54 | 0.70 | 6.3      | 0.5   | 1.1   |
| D5        | 0.91         | 77%                | 0.71 | 0.82 | 6.0      | 3.1   | 6.1   |
| D6        | 0.83         | 69%                | 0.64 | 0.77 | 6.4      | 2.5   | 5.2   |
| D7        | 0.75         | 79%                | 0.72 | 0.83 | 5.0      | 2.8   | 5.4   |
| D8        | 0.72         | 69%                | 0.64 | 0.77 | 5.0      | 2.4   | 4.8   |
| OS1       | 2.85         | 2%                 | 0.08 | 0.35 | 14.5     | 0.8   | 6.0   |
| OS2       | 179.61       | 2%                 | 0.08 | 0.35 | 47.4     | 27.1  | 190.9 |
| OS3       | 11.99        | 2%                 | 0.08 | 0.35 | 47.6     | 1.7   | 12.6  |

DESIGN POINT FROM M&S MDDP  
 (PROPOSED CONDITIONS MAP) TO BE EXISTING  
 AT THE TIME OF CHANNEL DEVELOPMENT  
 $Q_{(100)} = 1775.7$  CFS  
 $Q_{(5)} = 366.6$  CFS

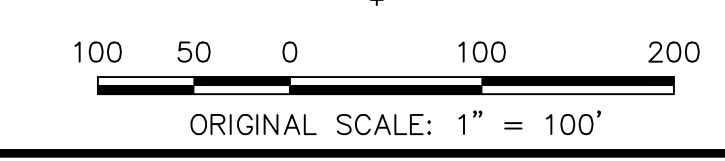

DRAINAGE MAP  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 3/23/22  
 SHEET 2 OF 2




Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com



# WATER QUALITY CAPTURE PLAN


## HOMESTEAD NORTH

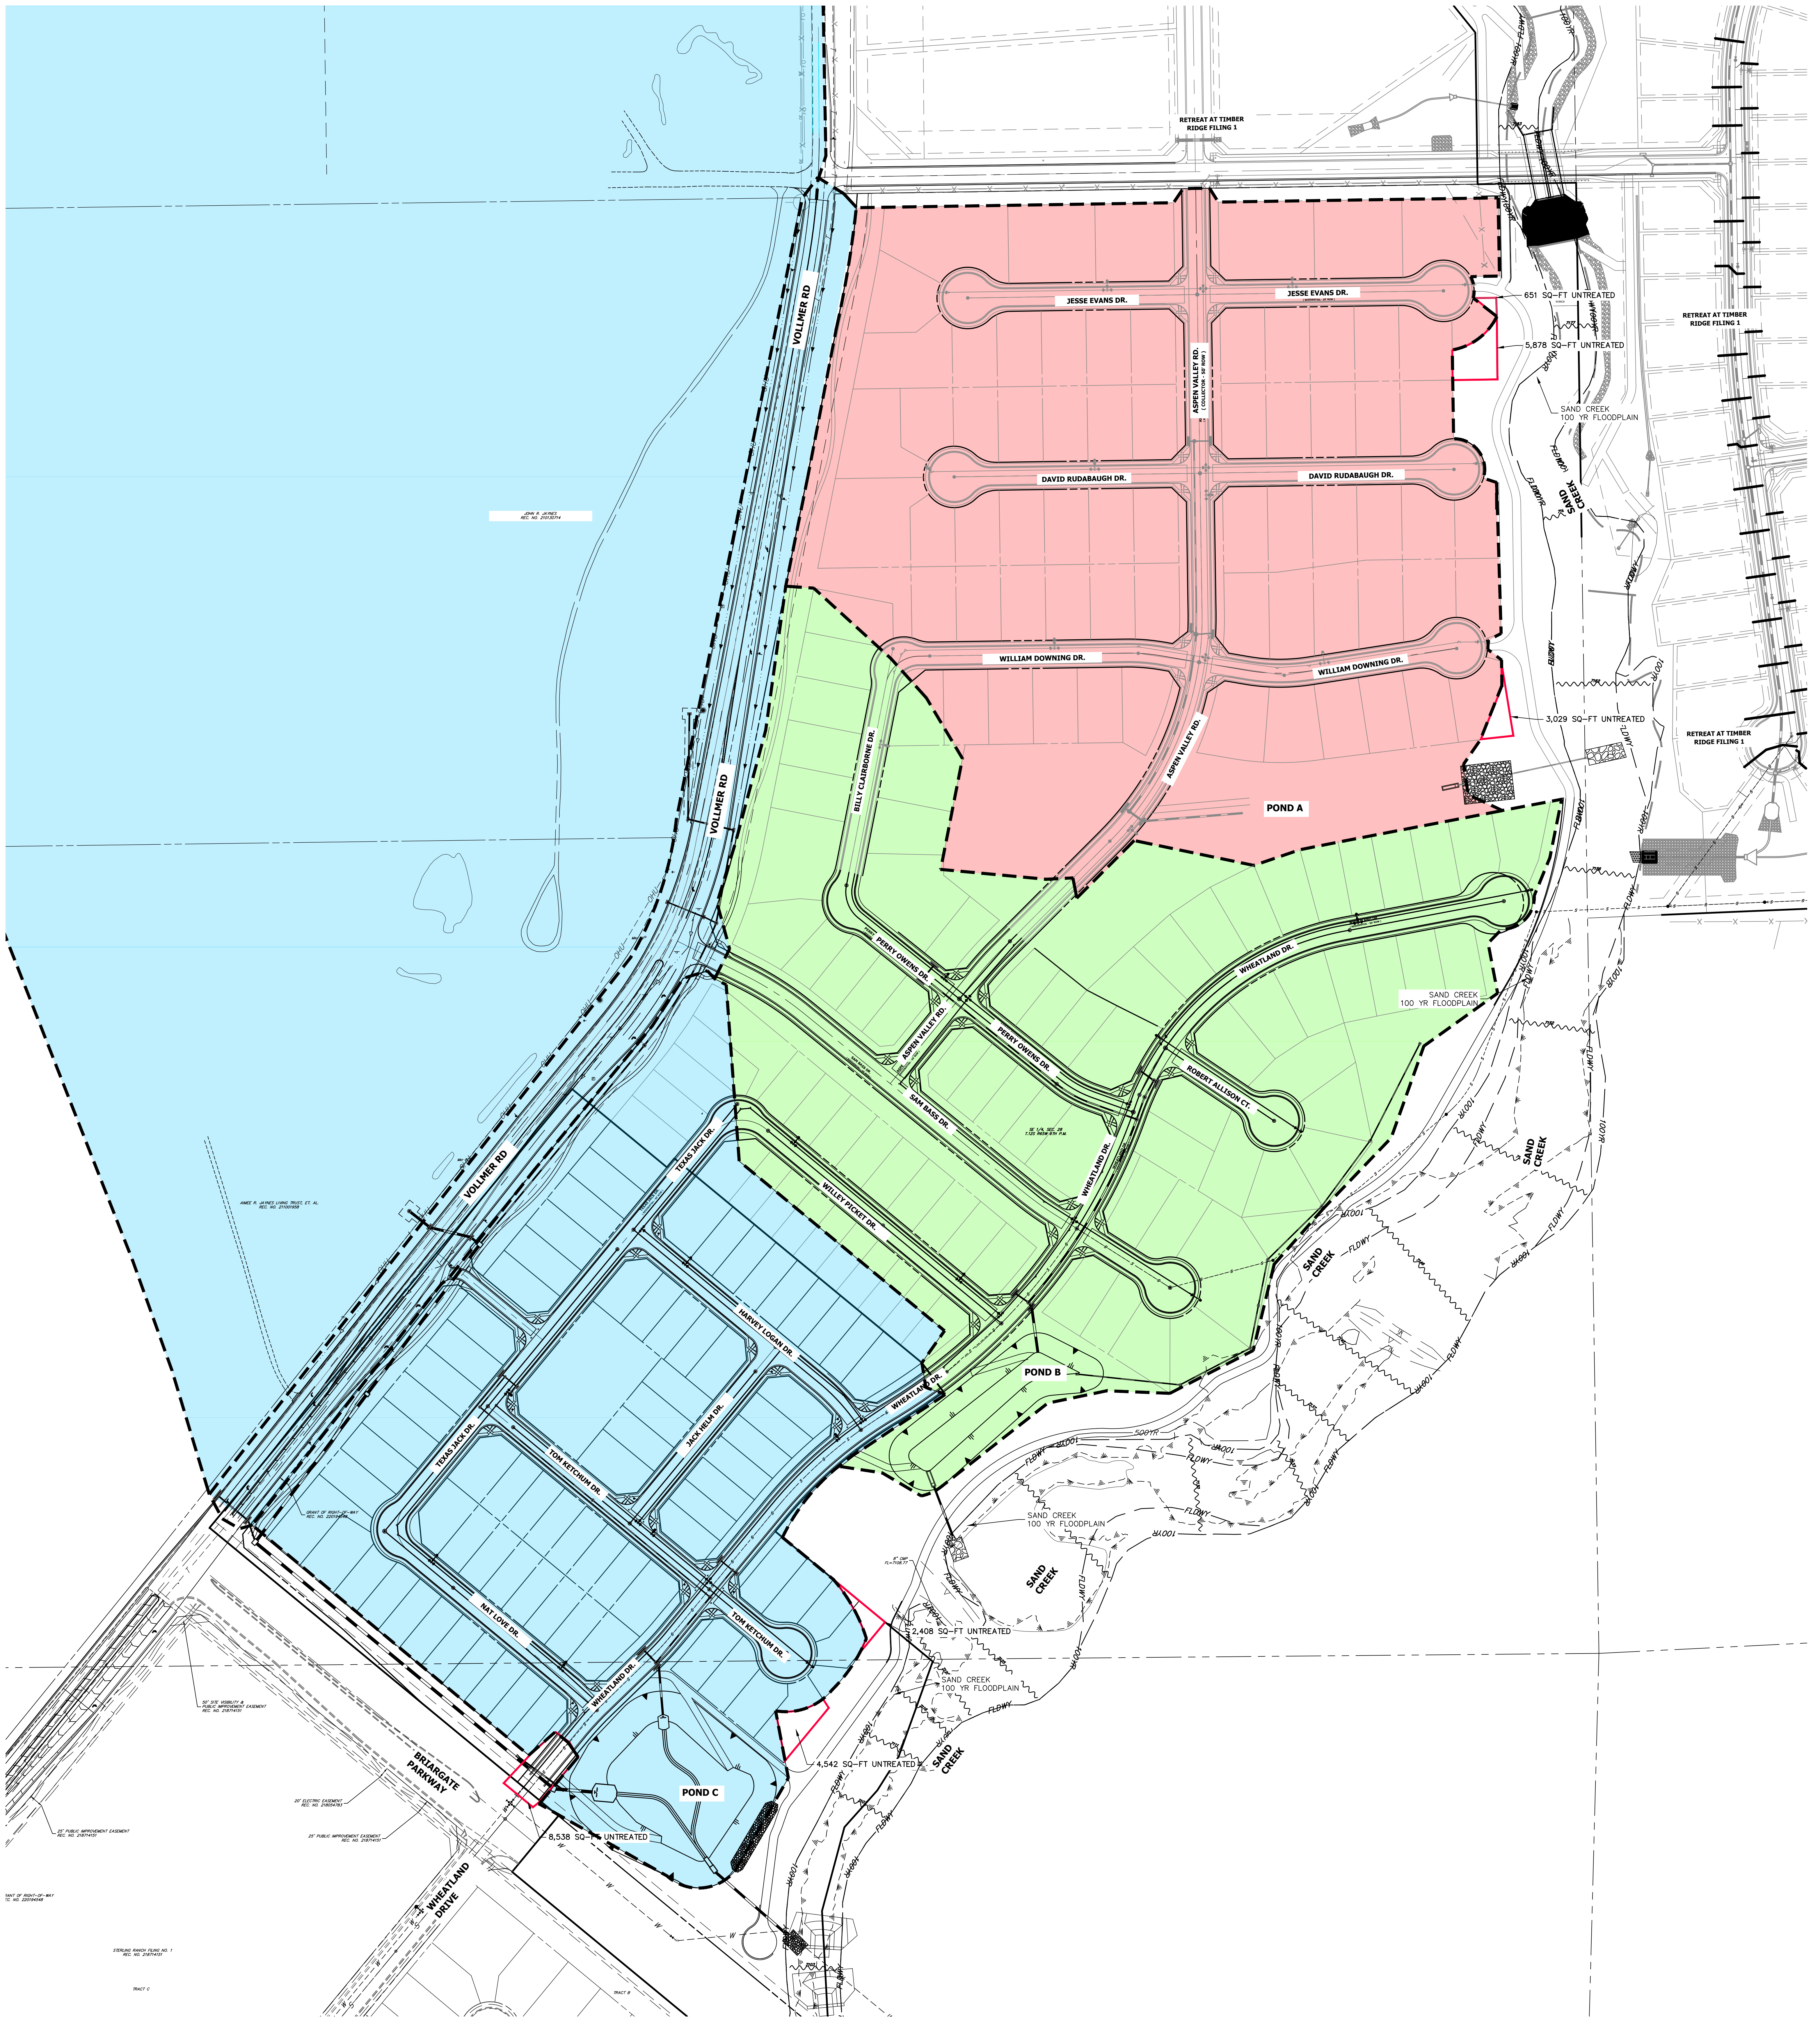

- POND A 29.82 ACRES, 46.5% IMPERVIOUS**
- POND B 27.86 ACRES, 50.0% IMPERVIOUS**
- POND C 224.42 ACRES, 10.3% IMPERVIOUS**

**NOTE:**


1. A SEPARATE PLAN FOR STERLING RANCH ROAD AND BRIARGATE PKWY WILL BE PROVIDED IN A THE SEPARATE FDR REQUIRED FOR CONSTRUCTION OF THESE ROADWAYS.
2. A TOTAL OF 20,046 SQ-FT ON SITE IS LEFT UNTREATED.
3. POND C TREATS THE IMPROVEMENTS TO VOLLNER ROAD AND THE OFFSITE TRIBUTARY AREA

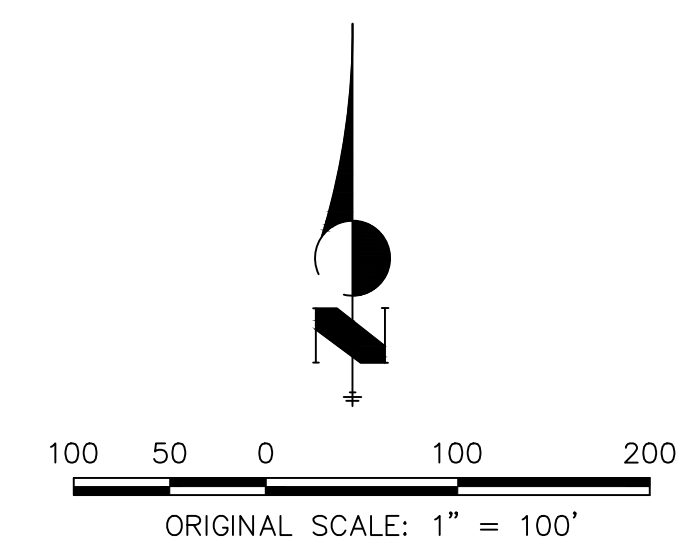

WQ - PONDS  
 HOMESTEAD NORTH  
 JOB NO. 25188.00  
 03-23-2022  
 SHEET 1 OF 1



NEW DOC



**MASTER DEVELOPMENT  
DRAINAGE REPORT  
FOR  
STERLING RANCH FILING NOS. 1&2  
AND  
FINAL DRAINAGE REPORT FOR  
STERLING RANCH FILING NO. 1**

**EL PASO COUNTY, COLORADO**

DECEMBER 2017

Prepared for:

**SR Land, LLC  
20 Boulder Crescent, Suite 210  
Colorado Springs, CO 80903**

Prepared by:



**CIVIL CONSULTANTS, INC.  
20 Boulder Crescent, Suite 110  
Colorado Springs, CO 80903  
(719) 955-5485**

RECEIVED VERSION

JAN 04 2018

Project #09-002  
DSD Project # SF-16-013

*Keep*

**SF-16-013**

5-year and 0.96 for the 100-year. Developed runoff of Q5=16.1 cfs and Q100=36.7 cfs has been calculated for DP4. The surface runoff is routed via overlot grading and curb and gutter to DP4 which will be collected by a 15' CDOT type R at-grade inlet. The intercepted flow (Q5=13.3 cfs and Q100=20.0 cfs) will combine with flows from PR5 and be routed east via a 30" RCP (PR6, Q5=16.8 cfs and Q100=29.4 cfs) to Detention Pond 4 (DP 10). Flows will outfall into a concrete lined forebay.

**DP2**, 5.39 acres, consists of Basin B future residential lots and streets with runoff coefficients of 0.38 for the 5-year and 0.55 for the 100-year. Developed runoff of Q5=8.0 cfs and Q100=19.3 cfs has been calculated for DP2. The surface runoff is routed via overlot grading and proposed swales to a temporary sediment basin at DP2 which will be collected by a temporary 36" FES. The flows will be routed east via a 36" RCP (PR2, Q5=8.0 cfs and Q100=19.3 cfs) to DP5.

**DP5**, 0.80 acres, consists of Basin G future residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year, Basin H (Dines Boulevard) with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year and flowby from DP4. Developed runoff of Q5=4.2 cfs and Q100=19.7 cfs has been calculated for DP5. The surface runoff is routed via overlot grading and curb and gutter to DP5 which will be collected by a 15' CDOT type R at-grade inlet. The intercepted flow (Q5=4.2 cfs and Q100=14.7 cfs) will combine with flows from PR2 and be routed east via a 36" RCP (PR3, Q5=11.6 cfs and Q100=27.6 cfs) to DP6.

**DP6**, 4.68 acres, consists of Basin J and K future residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year, Basin L (Dines Boulevard) and Basin I (Wheatland Drive) with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year. Developed runoff of Q5=14.1 cfs and Q100=26.7cfs has been calculated for DP6. The surface runoff is routed via overlot grading and curb and gutter to DP6 which will be collected by a 15' CDOT type R at-grade inlet. The intercepted flow (Q5=12.1 cfs and Q100=17.2 cfs) will combine with flows from PR3 and be routed east via a 36" RCP (PR4, Q5=21.8 cfs and Q100=42.1 cfs) to Detention Pond 4 (DP 10). Flows will outfall into a concrete lined forebay.

**DP9**, 9.73 acres, consists of Basin R future residential lots and streets with runoff coefficients of 0.38 for the 5-year and 0.55 for the 100-year. Developed runoff of Q5=12.5 cfs and Q100=30.4 cfs has been calculated for DP9. The surface runoff is routed via overlot grading and swales to a temporary sediment basin at DP9 which will be collected by a 30" FES. The flow will be routed south via a 30" RCP (PR10, Q5=12.5 cfs and Q100=30.4 cfs) to Detention Pond 4 (DP 10). Flows will outfall into a concrete lined forebay.

**DP10**, 1.97 acres, consists of Basin S (**Detention Pond 4**) with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year. The combined upstream developed runoff of Q5=50.0 cfs and Q100=102.9 cfs has been calculated for DP10. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff calculated onsite. The pond is designed to treat approx 27.5 acres, and provide 0.46 ac-ft of water quality storage and 2.90 ac-ft of 100-year storage. The forebay, trickle channel micropool, outlet structure and pipe have been designed per the UDFCD manual and per the Detention Design-UD-Detention v3.05 workbook. The detention pond will be private and shall be maintained by the Sterling Ranch Metropolitan District. Access shall be granted to the owner and El Paso County for access and maintenance of the private detention pond. A private maintenance agreement document shall accompany the submittal. In the event of clogging or total inlet failure, flows at DP10 will over top the emergency spillway and outfall into Sand Creek. A rip rap apron will be constructed to dissipate energy and prevent local scour at the outlet. The peak release rate from pond 4 (PR11, Q5=2.7 cfs and Q100=36.2 cfs ~30" RCP) will combine with offsite flows from PR18 (Q5=16.2 cfs and Q100=125.9 cfs). The summed flows (PR12, Q5=18.9 cfs and Q100=162.1 cfs) will outfall, via a 54" RCP at DP11 and into Sand Creek. Impacts from the outfall into Sand Creek will be addressed in the revised TM-SCCS.

DP23 which will be collected by a 10' CDOT type R sump inlet. The flow will combine with flow from PR25 and will be routed east via a 36" RCP (PR26, Q5=3.2 cfs and Q100=27.7 cfs) to Detention Pond 8 (DP 27). Flows will outfall into a concrete lined forebay. In the event of clogging or total inlet failure, flows at DP23 will over top the curb and gutter and outfall into the Detention Pond 8 (DP 27).

**DP26**, 1.32 acres, consists of Basin TT future residential lots and streets with runoff coefficients of 0.38 for the 5-year and 0.55 for the 100-year. Developed runoff of Q5=2.0 cfs and Q100=4.9 cfs has been calculated for DP26. The surface runoff is routed via overlot grading and swales to a temporary sediment basin at DP26 which will be collected by an 18" FES. The flow will routed south via an 18" RCP (PR28) to Detention Pond 8 (DP 27). Flows will outfall into a concrete lined forebay.

**DP27**, 2.17 acres, consists of Basin UU (**Detention Pond 8**) with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year. The combined upstream developed runoff of Q5=42.3 cfs and Q100=112.8 cfs has been calculated for DP27. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff calculated onsite. The pond is designed to treat approx 29.0 acres, and provide 0.48 ac-ft of water quality storage and 3.00 ac-ft of 100-year storage. The forebay, trickle channel micropool, outlet structure and pipe have been designed per the UDFCD manual and per the Detention Design-UD-Detention v3.05 workbook. The detention pond will be private and shall be maintained by the Sterling Ranch Metropolitan District. A private maintenance agreement document shall accompany the submittal. In the event of clogging or total inlet failure, flows at DP27 will over top the emergency spillway and outfall into Sand Creek. A rip rap apron will be constructed to dissipate energy and prevent local scour at the outlet. The peak release rate from pond 8 (PR29, Q5=2.9 cfs and Q100=41.7 cfs) will outfall, via a 30" RCP into Sand Creek. Impacts from the outfall into Sand Creek will be addressed in the revised TM-SCCS.

The water quality volume and 100-year volume required for the site has been determined using the guidelines set forth in the City of Colorado Springs/El Paso County Drainage Criteria Manual Chapter 6-Volume II. Refer to the Detention Basin Design sheets located within the appendix of this report.

#### **Design Points Tributary to Detention Pond W-5 (Prelim. Drainage Map Sheet 1)–Filing No. 2**

**DP28**, 33.3 acres, consists of Basin OS3 off-site Barbarick Subdivision with runoff coefficients of 0.36 for the 5-year and 0.55 for the 100-year and Basin YY future Sterling Ranch residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year. Developed runoff of Q5=25.8 cfs and Q100=60.2 cfs has been calculated for DP28. Per the "Final Drainage Report for Barbarick Subdivision Portions of Lots 1, 2 and Lots 3, 4", prepared by Matrix Design Group, dated June 6, 2016, a combined onsite flow of Q5=11.4 cfs and Q100=85.4 cfs was calculated up to the detention pond on the south boundary line of the Barbarick Subdivision. The reduction of flow, from previous reports is attributed to a reduction of Sterling Ranch Subdivision flow contributing to the OS3 basin. The release rate from the detention pond combined with Basin YY are Q5=25.8 cfs and Q100=60.2 cfs. The surface runoff shall be collected by a temporary sediment basin and 36" FES and routed south via 36" RCP (PR32) to PR34. In the event of clogging, flow will be routed via historic drainage patterns to DP33. Historic flows produced by Basin OS3 will be accounted for in the calculations for detention/water quality for Pond W5. The drainage report was prepared by Matrix Design Group, 2016 for the Barbarick Subdivision and has been attached at the end of the reference section of this report. The Final Drainage Report for Filing No. 2 will address the revisions from the previous report to the new Matrix report.

**DP29**, 12.58 acres, consists of Basin XX future residential lots and streets with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year and Basin JP-1 future school site with runoff coefficients of 0.39 for the 5-year and 0.55 for the 100-year. Developed runoff of Q5=17.3 cfs and Q100=41.7 cfs has been calculated for DP29. The surface runoff will be routed via overlot grading and curb and gutter to a temporary sediment basin at DP29 which will be collected by a 36" FES. The flow will be routed west via

a 36" RCP (PR33) and will combine with flow from PR32. The combined flows in PR34 (Q5=41.4 cfs and Q100=97.8 cfs) will be routed south and west via a 48" RCP to PR35.

**DP30**, 2.46 acres, consists of Basin III future open space area with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year and Basin JP-7A (Sterling Ranch Road) with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year. Developed runoff of Q5=6.5 cfs and Q100=13.0 cfs has been calculated for DP30. The surface runoff is routed via overlot grading and curb and gutter to DP30 which will be collected by a 15' CDOT type R at-grade inlet. The intercepted flow (Q5=6.5 cfs and Q100=11.1 cfs) will be routed south via a 24" RCP (PR34A) and will combine with flows from PR34 and PR34B. The combined flows (Q5=53.1 cfs and Q100=117.8 cfs) will be routed west via a 48" RCP (PR35) to PR39.

**DP31**, 4.64 acres, consists of Basin JIJ future residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year and Basin JP-7A (Sterling Ranch Road) with runoff coefficients of 0.90 for the 5-year and 0.96 for the 100-year. Developed runoff of Q5=8.4 cfs and Q100=19.8 cfs has been calculated for DP31. The surface runoff is routed via overlot grading and curb and gutter to DP31 which will be collected by a 15' CDOT type R at-grade inlet. The intercepted flow (Q5=8.2 cfs and Q100=14.2 cfs) will be routed south via a 24" RCP (PR34B) and will combine with flows from PR34 and PR34A. The combined flows (PR35, Q5=53.1 cfs and Q100=117.8 cfs) will be routed west via a 48" RCP to PR39.

**DP32**, 17.0 acres, consists of Basin OS2 off-site Barbarick Subdivision with runoff coefficients of 0.49 for the 5-year and 0.62 for the 100-year. Developed runoff of Q5=30.4 cfs and Q100=80.8 cfs has been calculated for DP32 Per the "Final Drainage Report for Barbarick Subdivision Portions of Lots 1, 2 and Lots 3, 4", prepared by Matrix Design Group, dated June 6, 2016, a combined onsite flow of Q5=3.13 cfs and Q100=11.6 cfs was calculated up to the sand filter pond on the south boundary line of the Barbarick Subdivision. The release rate from the sand filter pond combined with Lots 1 and 2 west of the sand filter pond are Q5=30.4 cfs and Q100=80.8 cfs The surface runoff shall be collected by a temporary sediment basin and 42" FES. In the event of clogging, flow will be routed via historic drainage patterns to DP33. The flow will be routed south via 42" RCP (PR36) to PR38. Upon future development of this basin, full spectrum detention shall be required and will release to historic release rates of Q5=30.4 cfs and Q100=80.8 cfs. Historic flows produced by Basin OS2 will be accounted for in the calculations for detention/water quality for Pond W5. The Final Drainage Report for Filing No. 2, will address the revisions from the previous report to the new Matrix report.

**DP33**, 9.68 acres, consists of Basin AAA future residential lots and streets with runoff coefficients of 0.49 for the 5-year and 0.65 for the 100-year. Developed runoff of Q5=17.3 cfs and Q100=38.5 cfs has been calculated for DP33. The surface runoff will be routed via overlot grading and curb and gutter to a temporary sediment basin at DP33 which will be collected by a 30" FES. The flow will be routed west via a 30" RCP (PR37) and will combine with flows from PR36. The combined flows (PR38, Q5=45.9 cfs and Q100=115.2 cfs) will be routed south via a 48" RCP to PR39. The combined flows of PR35 and PR38 (PR39, Q5=98.5 cfs and Q100=232.0 cfs) will be routed south via a 66" RCP to PR57.

**DP40**, 13.89 acres, consists of Basin CCC future residential lots and streets with runoff coefficients of 0.49 for the 5-year and 0.62 for the 100-year. Developed runoff of Q5=25.5 cfs and Q100=54.2cfs has been calculated for DP40. The surface runoff is routed via overlot grading and curb and gutter to a temporary sediment basin at DP40 which will be collected by a 36" FES. The flow will be routed west via a 36" RCP (PR46) and will combine with flow from PR47. The combined flows in PR48 (Q5=26.0 cfs and Q100=61.7 cfs) will be routed south via a 42" RCP to PR52.

**DP44**, 4.24 acres, consists of Basin HHH undisturbed gas line easements and minimal rear residential lots with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year. Developed runoff of Q5=1.2 cfs and Q100=9.1 cfs has been calculated for DP44. The surface runoff is routed via historic drainage patterns and overlot grading to a temporary sediment basin at DP44 which will be collected by an 18" FES. The



calculated for DP50. In the undeveloped condition, runoff of Q5=2.0 cfs and Q100=15.0 cfs are routed via historic drainage patterns and proposed swales to DP50. The surface runoff will be collected by a 36" FES. The flows will be routed south via a 36" RCP (PR64) to PR65. The accumulated flow in PR65 (Q5=32.0 cfs and Q100=309.7 cfs) will be routed south to PR67. Upon future development of this basin, full spectrum detention shall be required and will release to historic release rates of Q5=2.0 cfs and Q100=15.0 cfs.

**DP53**, 5.37 acres, consists of Basin JP-12 a future commercial parcel with runoff coefficients of 0.81 for the 5-year and 0.88 for the 100-year. Developed runoff of Q5=19.8 cfs and Q100=36.1 cfs has been calculated for DP53. In the undeveloped condition, runoff of Q5=1.4 cfs and Q100=10.0 cfs are routed via historic drainage patterns and proposed swales to DP53. The surface runoff will be collected by a 30" FES. The flows will be routed south via a 30" RCP (PR66) to PR67. The accumulated flow in PR67 (Q5=39.1 cfs and Q100=322.5 cfs) will be routed via a 72" RCP south to Sand Creek. Upon future development of this basin, full spectrum detention shall be required and will release to historic release rates of Q5=1.4 cfs and Q100=10.0 cfs. The summed flows at DP68 (PR74, Q5=42.2 cfs and Q100=472.2 cfs) will outfall into Sand Creek. Impacts from the outfall into Sand Creek will be addressed in the revised TM-SCCS. A riprap apron will be constructed to dissipate energy and prevent local scour at the outlet. ✪

**DP54**, 1.21 acres, consists of Basin RP-7D (Marksheffel Road) with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year and DP51 flowby. Undeveloped runoff of Q5=0.4 cfs and Q100=3.5 cfs has been calculated for DP54. Undeveloped flows will be routed to a temporary sediment basin via overlot grading as shown on the "Sterling Ranch-Phase 1 Offsite Grading, Early Grading & Erosion Control Plans", prepared by M&S Civil Consultants, Inc., dated November 2015, which will route flows to Sand Creek. Erosion control will be provided.

**DP55**, 1.28 acres, consists of Basin RP-7C (Marksheffel Road) with runoff coefficients of 0.08 for the 5-year and 0.35 for the 100-year and DP51 flowby. Undeveloped runoff of Q5=0.4 cfs and Q100=4.9 cfs has been calculated for DP55. Undeveloped flows will be routed to a temporary sediment basin via overlot grading as shown on the "Sterling Ranch-Phase 1 Offsite Grading, Early Grading & Erosion Control Plans", prepared by M&S Civil Consultants, Inc., dated November 2015, which will route flows to Sand Creek. Erosion control will be provided.

**Basin SSS**, 1.21 acres, consists of the backyards of future residential lots with runoff coefficients of 0.22 for the 5-year and 0.46 for the 100-year. Developed runoff of Q5=1.1 cfs and Q100=3.8 cfs has been calculated for this basin. Developed flows will be sheet flow into Sand Creek. Erosion control will be provided.

There will be bank stabilization improvements to the Sand Creek Drainage Channel with the development of the STERLING RANCH FILING NOS. 1&2 site (Roadways and tracts) to maintain the integrity of roadways and ponds. However, channel improvements for Sand Creek (checks, drops, etc...) will be installed in accordance with the Subdivision Improvement Agreement.

## **DETENTION PONDS**

**Detention Pond 4**, has combined upstream developed runoff of Q5=50.0 cfs and Q100=102.9 cfs. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff calculated onsite. The pond is designed to treat approx 27.5 acres, and provide 0.46 ac-ft of water quality storage and 2.90 ac-ft of 100-year storage. The forebay, trickle channel micropool, outlet structure and pipe have been designed per the UDFCD manual and per the Detention Design-JUD-Detention v3.05 workbook.

**Detention Pond 8**, has combined upstream developed runoff of Q5=42.3 cfs and Q100=112.8 cfs. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff



calculated onsite. The pond is designed to treat approximately 29.0 acres, and provide 0.48 ac-ft of water quality storage and 3.00 ac-ft of 100-year storage. The forebay, trickle channel micropool, outlet structure and pipe have been designed per the UDFCD manual and per the Detention Design-UD-Detention v3.05 workbook.

**Detention Pond W-5**, has combined upstream developed runoff of  $Q5=233.2$  cfs and  $Q100=518.2$  cfs. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff calculated onsite. The pond is designed to treat approx 175.6 acres, and provide 2.90 ac-ft of water quality storage and 17.16 ac-ft of 100-year storage. The forebay, trickle channel micropool, outlet structure and pipe have been designed per the UDFCD manual and per the Detention Design-UD-Detention v3.05 workbook. Design and calculations will be addressed in the Filing No. 2 Final Drainage Report. See Sand Creek Channel Study-Future Hydrologic Conditions Map in the appendix. Impacts from the outfall into Sand Creek will be addressed in the revised TM-SCCS.

**Detention Pond B-B**, has combined upstream developed runoff of  $Q5=4.7$  cfs and  $Q100=15.0$  cfs. The proposed temporary Detention Pond functions to provide full spectrum detention and water quality for runoff calculated onsite. The pond is designed to treat approximately 5.98 acres, and provide 0.04 ac-ft of water quality storage and 0.48 ac-ft of 100-year storage. The outlet structure and pipe have been designed to release the required rates per the UDFCD manual and per the Detention Design-UD-Detention v3.05 workbook.

**Detention Pond W-9**, has combined upstream developed runoff of  $Q5=8.9$  cfs and  $Q100=21.2$  cfs. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff calculated offsite. The pond is designed to treat approx 5.87 acres, and provide 0.092 ac-ft of water quality storage and 0.638 ac-ft of 100-year storage. The outlet structure, 18" filter layer(minimum), underdrain and pipe have been designed per the UDFCD manual and per the Detention Design-UD-Detention v3.07 workbook.

**Conceptual Detention Pond W-4**, has combined upstream developed runoff of  $Q5=72.9$  cfs and  $Q100=368.4$  cfs. The proposed Detention Pond functions to provide full spectrum detention and water quality for runoff calculated offsite. The pond is designed to treat approx 352.2 acres, and provide 1.73 ac-ft of water quality storage and 6.63 ac-ft of 100-year storage. The forebay, trickle channel micropool, outlet structure and pipe have been designed per the UDFCD manual and per the Detention Design-UD-Detention v3.05 workbook. Design and calculations will be addressed in the Filing No. 2 Final Drainage Report. See Sand Creek Channel Study-Future Hydrologic Conditions Map in the appendix. Impacts from the outfall into Sand Creek will be addressed in the revised TM-SCCS. The Conceptual Detention Pond W-4 is subject to El Paso County approval for the site shown.

The detention ponds will be private and shall be maintained by the Sterling Ranch Metropolitan District. Access shall be granted to the owner and El Paso County for access and maintenance of the private detention ponds. A private maintenance agreement documents shall accompany the submittal. In the event of clogging or total inlet failure, flows will over top the emergency spillway and outfall into Sand Creek. A rip rap apron will be constructed to dissipate energy and prevent local scour at the outlet.

The water quality volume and 100-year volume required for the site has been determined using the guidelines set forth in the City of Colorado Springs/El Paso County Drainage Criteria Manual Chapter 6 - Volume II. Refer to the Detention Basin Design sheets located within the appendix of this report.

## **EROSION CONTROL**




It is the policy of the El Paso County that a grading and erosion control plan be submitted with the drainage report. EPC approved "Early Grading Plan for Sterling Ranch Phase I Onsite Grading &







15 NORTH NEVADA AVENUE  
 COLORADO SPRINGS, CO 80903  
 (719) 955-5485, FAX (719) 471-4812

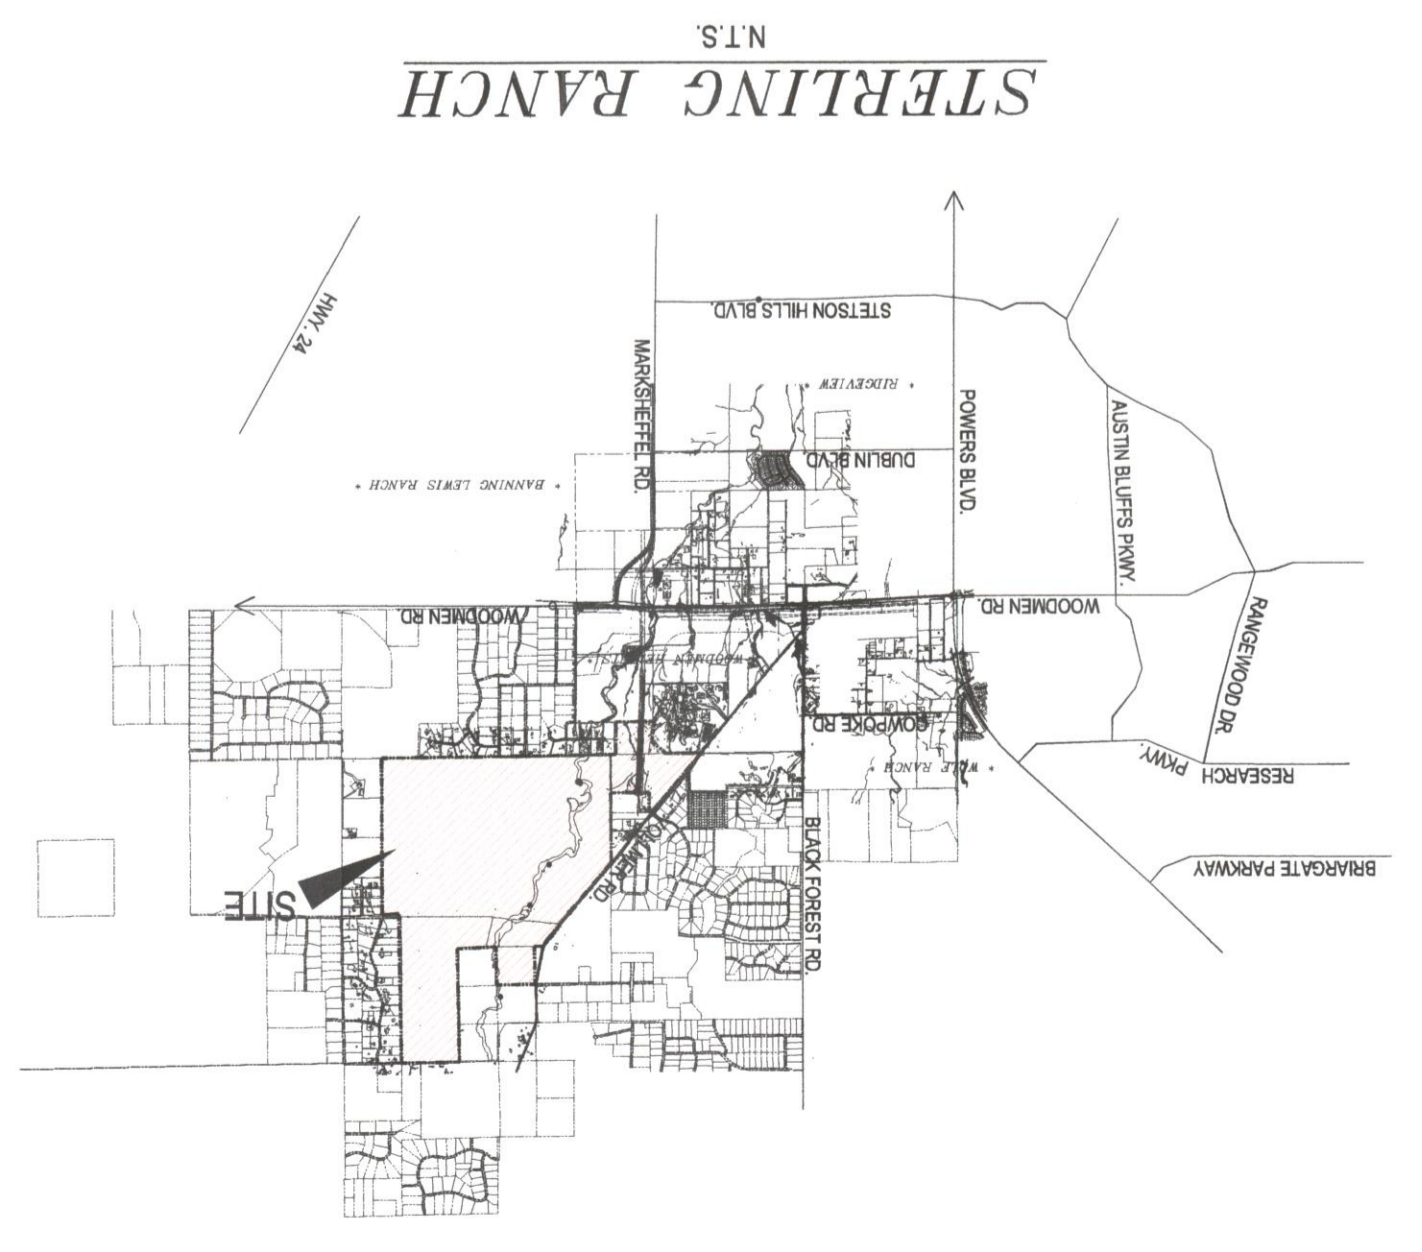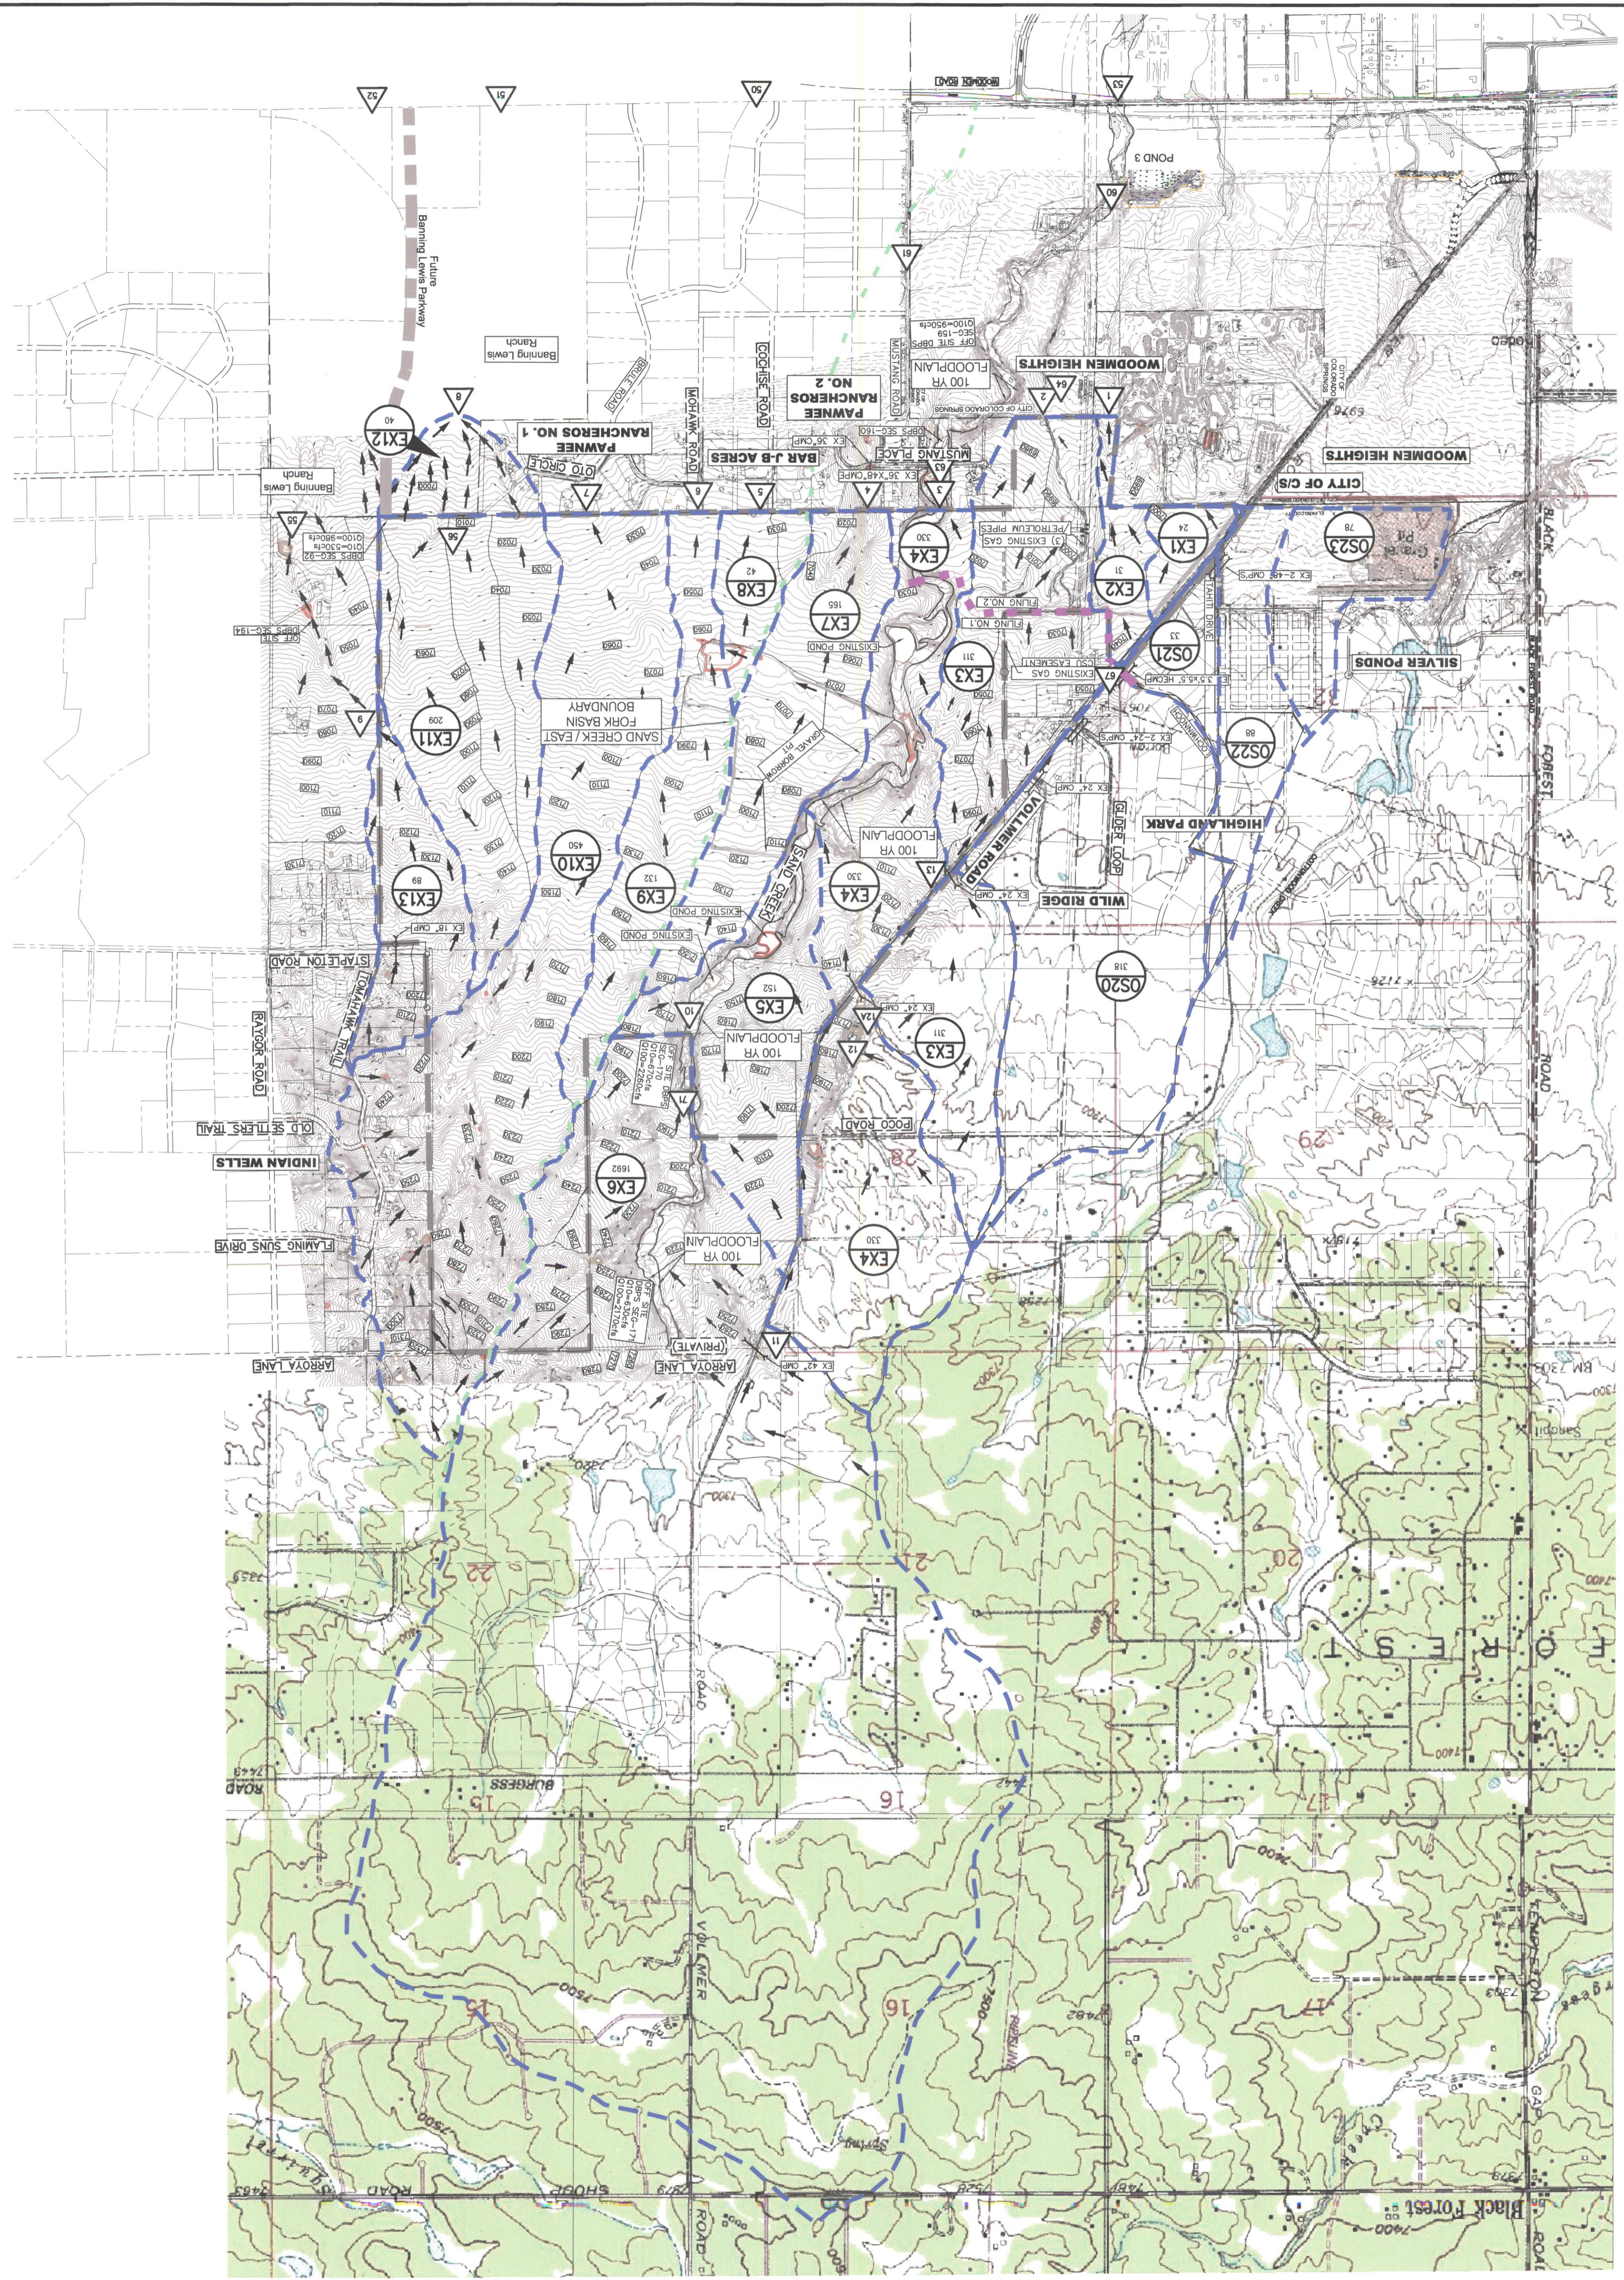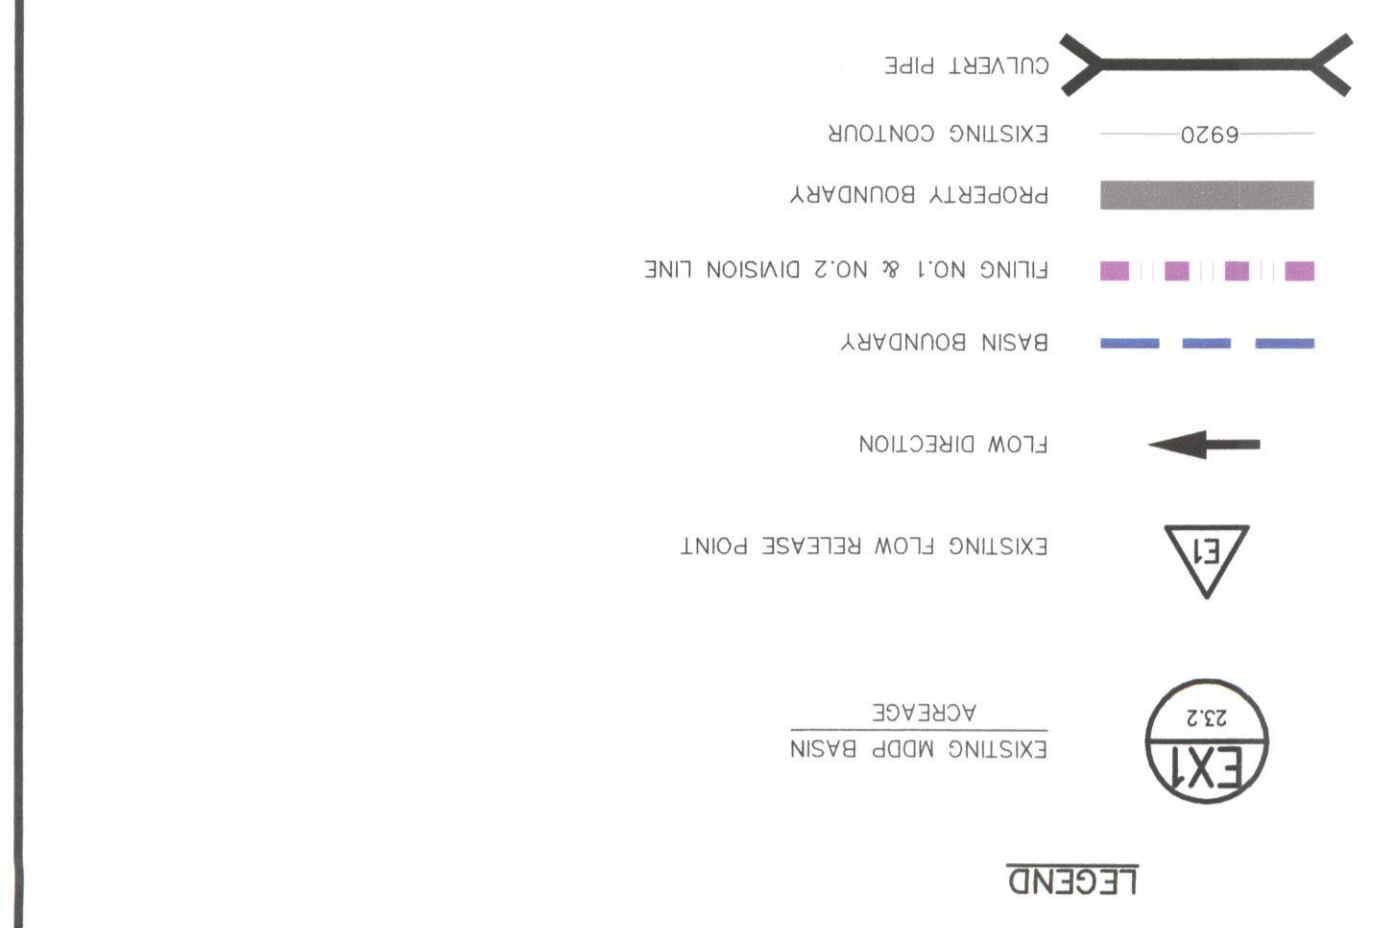

HISTORIC CONDITION

DESIGN POINTS

| DESIGN POINT | SO. Q <sub>100</sub> | Q <sub>100</sub> (cfs) | MI. Q <sub>100</sub> | Q <sub>100</sub> DP/10 |
|--------------|----------------------|------------------------|----------------------|------------------------|
| 1            | 0.09                 | 5                      | 84                   |                        |
| 2            | 0.49                 | 49                     | 341                  | 0.74                   |
| 3            | 0.52                 | 139                    | 2610                 | 4.33                   |
| 4            | 0.26                 | 12                     | 197                  |                        |
| 5            | 0.07                 | 4                      | 64                   |                        |
| 6            | 0.21                 | 11                     | 149                  |                        |
| 7            | 0.20                 | 48                     | 474                  |                        |
| 8            | 0.39                 | 18                     | 305                  |                        |
| 9            | 0.14                 | 6                      | 114                  |                        |
| 10           | 2.64                 | 122                    | 2245                 | 3.27                   |
| 11           | 0.09                 | 5                      | 83                   |                        |
| 12A          | 0.01                 | 3                      | 16                   |                        |
| 12           | 0.27                 | 10                     | 200                  |                        |
| 13           | 0.17                 | 6                      | 126                  |                        |

NOTE: SO. MARE NOT CONSISTANT AT EACH DESIGN POINT DP-DPPS

|    |      |      |  |  |
|----|------|------|--|--|
| 55 | 0.48 | #    |  |  |
| 56 | 0.53 | 1210 |  |  |
| 60 | 5.38 | 2629 |  |  |

HISTORIC CONDITION

BASIN SUMMARY

| BASIN | AREA (ACRES) | Q <sub>100</sub> (cfs) |
|-------|--------------|------------------------|
| EX-1  | 24           | 3                      |
| EX-2  | 31           | 3                      |
| EX-3  | 311          | 49                     |
| EX-4  | 330          | 71                     |
| EX-5  | 152          | 14                     |
| EX-6  | 1692         | 118                    |
| EX-7  | 165          | 12                     |
| EX-8  | 42           | 4                      |
| EX-9  | 132          | 11                     |
| EX-10 | 450          | 48                     |
| EX-11 | 209          | 17                     |
| EX-12 | 40           | 5                      |
| EX-13 | 89           | 6                      |
| OS-20 | 318          | 61                     |
| OS-21 | 33           | 8                      |
| OS-22 | 88           | 18                     |
| OS-23 | 78           | 34                     |

NOTE: BASIN S OS-22 & OS-23 NOT PART OF THIS REPORT. FLOWS FOLLOW HISTORIC PATTERNS ON THE WEST SIDE OF VOLLMER ROAD.



















**FINAL DRAINAGE REPORT  
FOR  
STERLING RANCH FILING NO. 2**

**Prepared For:  
SR Land, LLC  
20 Boulder Crescent, Suite 210  
Colorado Springs, CO 80903**

**June 2021  
Project No. 25188.01**

**Prepared By:  
JR Engineering, LLC  
5475 Tech Center Drive  
Colorado Springs, CO 80919  
719-593-2593**

**PCD File No. SF-20-015**

## DRAINAGE FACILITY DESIGN

---

### General Concept

The proposed stormwater conveyance system was designed to convey the developed Sterling Ranch Filing No. 2 runoff to the proposed full spectrum water quality and detention pond W5 via storm sewer. Pond W4 will be utilized to detain and treat large portions of offsite area. The proposed ponds were designed to release at less than historic rates to minimize adverse impacts downstream. Treated water will outfall directly into the Sand Creek Drainageway, where it will eventually outfall into Fountain Creek. All Ponds will be owned and maintained by Sterling Ranch Metro District. A proposed drainage map is presented in Appendix E showing locations of the pond and channel outfall locations.

To maintain the integrity of Pond W5, there will be bank stabilization improvements to the Sand Creek Drainage Channel with the development of the Sterling Ranch Filing No. 2 site. The pond release location will be protected with riprap. However, channel improvements for Sand Creek (checks, drops, etc.) will be installed in accordance with the construction plans performed by Matrix Design Group. JR Engineering is coordinating with Matrix Design Group. The flows discharged from Pond W5 will outfall into the reach of Sand Creek designed by Matrix. The discharge point from Sterling Ranch Filing No. 2 into Sand Creek is shown on the Matrix Design Plans in Appendix D. The rerouting of flows to ponds W4 and W5 outfall location should cause no negative impacts to downstream reaches of Sand Creek. Per the DBPS, Reach SC-9, the recommended improvements to the channel include selective rip rap linings, grade control check structures, and drop structure improvements that are anticipated to stabilize the channel to prevent further degradation, scour and meandering. Full Spectrum Detention in ponds W4 and W5 will reduce peak flows within the channel there-by adding to the integrity of the Sand Creek Channel.

The report is in compliance with the M&S 2018 MDDP. The total net outflow of the site into Sand Creek is 320.3 cfs at design point 4.8, as shown in the proposed drainage map in Appendix E. The diversion outfall for pond W5/W4 is in continuity with the approved MDDP. W4 and W5 correspond to pond FSD9 and FSD6 within the approved M&S 2018 MDDP. The MDDP shows the total net allowable release rate of these ponds to be 441.6 cfs at the junction structure and outfalls into Sand Creek.

Pond W4 and pond W5 350.74 acres and 173.97 acre have 524.71 acre tributary area. The existing drainage basins have a total net area of 569.9 acres. The total net existing runoff for the site is 473.2 cfs. In the proposed condition, the site will release a total of 320.3 cfs. No adverse downstream impacts are anticipated, with the proposed runoff being less than the existing runoff.

### Specific Details

#### ***Four Step Process to Minimize Adverse Impacts of Urbanization***

In accordance with the El Paso County Drainage Criteria Manual Volume 2, this site has implemented the four step process to minimize adverse impacts of urbanization. The four step process includes reducing runoff volumes, stabilizing drainageways, treating the water quality capture volume (WQCV), and consider the need for Industrial Commercial BMP's.



Step 1, Reducing Runoff Volumes: The development of the project site is a proposed single-family development with open spaces and lawn areas interspersed within the development which helps disconnect impervious areas and reduce runoff volumes.

Step 2, Stabilize Drainageways: Sterling Ranch Filing No. 2 utilizes storm sewer throughout the project site. This storm sewer directs the on-site development flows to the full spectrum detention Pond W5 that releases at or below historic rates into the Sand Creek Drainageway. Measures shall be implemented to prevent any negative impacts to the drainageway. Riprap at the outfall locations will be utilized to prevent any erosion. An emergency overflow spillway rundown has been designed from Pond W5 down into the Sand Creek Drainageway. The overflow channel will help protect and stabilize the drainageway by reducing channel degradation and erosion. The channel utilizes 4 foot deep "VH Soil Riprap" base with a minimum 4 inch overlay of topsoil, seed and mulch. A detailed analysis of the Sand Creek Drainageway is currently being conducted by Matrix Design Group. This report will cover stabilization measures and channel improvements needed for this reach of the Sand Creek Drainageway. The portions of Sand Creek to the south of the historic confluence point are to be stabilized per the Sand Creek Stabilization at Aspen Meadows Subdivision Filing No. 1 plans by Matrix Design Group, April 2020.

Step 3, Treat the WQCV: Water Quality treatment is provided in two proposed full spectrum water quality detention ponds: Pond W4 and Pond W5. Pond W5 will receive all runoff generated within Sterling Ranch Filing No. 2 as well as future Sterling Ranch Phase 2 and Copper Chase at Sterling Ranch, a school site and a small portion of offsite areas. Pond W4 will receive runoff generated from portions of Vollmer Road and a large portion of offsite areas to the north and west of Vollmer road. In general, the runoff from this site will be collected within inlets and conveyed to the proposed ponds via storm sewer. Upon entrance to the ponds, flows will be captured in a forebay designed to promote settlement of suspended solids. A trickle channel is also incorporated into the ponds to minimize the amount of standing water. The outlet structures have been designed to detain the water quality capture volume (WQCV) for 40 hours, and the extended urban runoff volume (EURV) for 72 hours. All flows released from the ponds will be reduced to less than historic rates into the Sand Creek Drainageway. These ponds will facilitate pollutant removal for the site, while also reducing peak stormwater rates into the Sand Creek Drainageway.

Step 4, Consider the need for Industrial and Commercial BMP's: future commercial sites are proposed within this development. Site specific storm water quality and erosion control plans will be required for each commercial tract prior to development. A site specific storm water quality and erosion control plan and narrative have also been prepared in conjunction with this final drainage report. Site specific temporary source control BMPs as well as permanent BMP's will be detailed in this plan and narrative to protect receiving waters.

### ***Water Quality***

In accordance with Section 13.3.2.1 of the CCS/EPCDCM, full spectrum water quality and detention are provided for all developed basins. For this site, two detention ponds have been proposed. The WQCV for each pond shall be released within 40 hours and the EURV shall be released within 72 hours. The table below provides the volumes required for each pond, along with their respective release rates for the 5-year and 100-year storm. Both ponds will utilize forebays, trickle channels, and outlet structures to dissipate energy and treat flows. The outlet structure for these ponds shall

reduce the release rates for all storm events to less than historic rates to minimize adverse impacts to downstream stormwater facilities. A broad crested weir is provided as an emergency spillway for each pond. The emergency spillway provided for Pond W5 will convey flows directly into the Sand Creek Drainageway. The emergency spillway provided for Pond W4 shall convey flows to the existing roadside swale along Vollmer Road. Both spillways will utilize riprap aprons to prevent scour at the outlets. Pond and outlet structure calculations and sizing can be found in Appendix C. The detention ponds will be private and shall be maintained by the Sterling Ranch Metropolitan District. Access shall be granted to the owner and El Paso County for access and maintenance of the private detention pond. Pond W5 corresponds to pond FSD6 from the MMDP ( $Q_5=7.6$  cfs,  $Q_{100}=149.7$  cfs) and is releasing less than the MDDP values in the proposed design.

Table 3. Pond Volumes & Release Rates

|                    | REQUIRED VOLUME<br>(AC-FT) | VOLUME PROVIDED<br>(AC-FT) | WQCV<br>(AC-FT) | EURV<br>(AC-FT) | 5-YEAR RELEASE<br>(CFS) | 100-YEAR RELEASE<br>(CFS) |
|--------------------|----------------------------|----------------------------|-----------------|-----------------|-------------------------|---------------------------|
| POND W5            | 18.376                     | 18.441                     | 3.32            | 11.843          | 3.40                    | 139.3                     |
| INTERIM<br>POND W4 | 7.506                      | 7.506                      | 2.220           | 3.714           | 20.7                    | 285.0                     |

Per the MDDP, Pond W4 is sized to maximize the area on the site & could be potentially enlarged in the future if more land is purchased. A preliminary design for the ultimate configuration of Pond W4 has been used to calculate potential volume. Upon future development, an expansion of Pond W4 will need to be finalized. The pond is designed to treat approximately 352.2 acres and provide approximately 2.281 ac-ft of water quality storage. Modifications will be required to ensure the outlet structure complies with local and El Paso County criteria. A preliminary pond sizing for the ultimate condition can be found in the appendix. Pond W4 corresponds to pond FSD9 from the MMDP ( $Q_5=24.9$  cfs,  $Q_{100}=290$  cfs) and is releasing less than the MDDP values in the proposed design. The ultimate emergency overflow path will be through Marksheffel and a section can be found within Appendix B demonstrating the ability to pass 319.2 cfs. The interim emergency overflow path will be via an emergency overflow inlet and the existing ditch along Vollmer Road.

### ***Erosion Control Plan***

The El Paso County Drainage Criteria Manual specifies an Erosion Control Plan and associated cost estimate must be submitted with each Final Drainage Report. The Erosion Control Plan for Sterling Ranch Filing No. 2 has been submitted with this report.

### ***Operation & Maintenance***



In order to ensure the function and effectiveness of the stormwater infrastructure, maintenance activities such as inspection, routine maintenance, restorative maintenance, rehabilitation and repair, are required. All proposed drainage structures within the any platted County ROW will be owned and maintained by El Paso County. All proposed drainage structures within the property or tracts will be owned and maintained by the Sterling Ranch Metro District. Vegetation in the natural and improved portions of Sand Creek Drainageway is the responsibility of Sterling Ranch Metro District. This includes all mowing, seeding and weed control activities. An Inspection & Maintenance Plan has been submitted concurrently with this final drainage report that details the required maintenance activities and intervals to ensure proper function of all stormwater infrastructures in the future. The full spectrum detention ponds will be owned & maintained by Sterling Ranch Metro District.





# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

*MHFD-Detention, Version 4.03 (May 2020)*

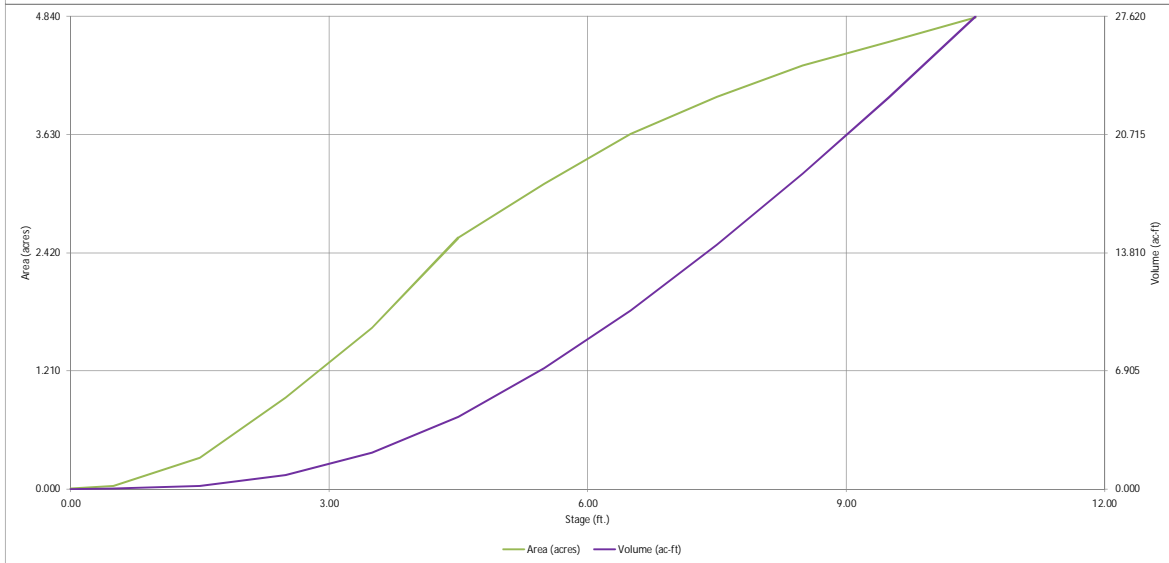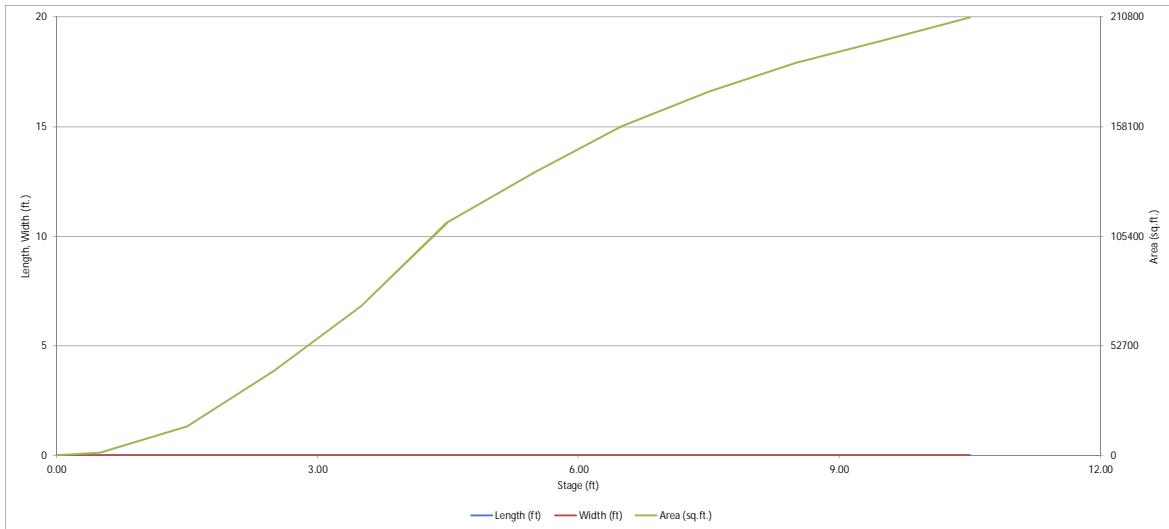


# DETENTION BASIN OUTLET STRUCTURE DESIGN

MFD Detention, Version 4.03 (May 2020)

Project: STERLING RANCH FILLING NO. 2

Basin ID: POND WS



|                          | Estimated Stage (ft) | Estimated Volume (ac-ft) | Outlet Type          |
|--------------------------|----------------------|--------------------------|----------------------|
| Zone 1 (WOCV)            | 4.13                 | 3.311                    | Orifice Plate        |
| Zone 2 (EURV)            | 6.88                 | 8.532                    | Rectangular Orifice  |
| Zone 3 (100-year)        | 8.49                 | 6.532                    | Weir/Pipe (Restrict) |
| <b>Total (all zones)</b> |                      | <b>18.376</b>            |                      |

**User Input - Orifice at Underdrain Outlet (typically used to drain WOCV in a Filtration BMP)**

|                                   |     |  |                               |     |                 |
|-----------------------------------|-----|--|-------------------------------|-----|-----------------|
| Underdrain Orifice Invert Depth - | N/A | ft (distance below the filtration media surface) | Underdrain Orifice Area -     | N/A | ft <sup>2</sup> |
| Underdrain Orifice Diameter -     | N/A | inches   | Underdrain Orifice Centroid - | N/A | feet            |

**User Input - Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WOCV and/or EURV in a sedimentation BMP)**

|  |      |   |                            |     |                 |
|--|------|---|----------------------------|-----|-----------------|
| Invert of Lowest Orifice -                 | 0.00 | ft (relative to basin bottom at Stage = 0 ft) | WQ Orifice Area per Row -  | N/A | ft <sup>2</sup> |
| Depth at top of Zone using Orifice Plate - | 6.88 | ft (relative to basin bottom at Stage = 0 ft) | Elliptical Half-Width -    | N/A | feet            |
| Orifice Plate: Orifice Vertical Spacing -  | N/A  | inches  | Elliptical Slot Centroid - | N/A | feet            |
| Orifice Plate: Orifice Area per Row -      | N/A  | inches  | Elliptical Slot Area -     | N/A | ft <sup>2</sup> |

**User Input - Stage and Total Area of Each Orifice Row (numbered from lowest to highest)**

| Row 1 (required)              | Row 2 (optional) | Row 3 (optional)  | Row 4 (optional)  | Row 5 (optional)  | Row 6 (optional)  | Row 7 (optional)  | Row 8 (optional)  |
|-------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Control (ft) | 0.00             | 2.35              | 4.00              |                   |                   |                   |                   |
| Orifice Area (sq. inches)     | 12.5%            | 12.5%             | 25.00             |                   |                   |                   |                   |
|                               | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) |
| Stage of Orifice Control (ft) |                  |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)     |                  |                   |                   |                   |                   |                   |                   |

**User Input - Vertical Orifice (Circular or Rectangular)**

|   | Zone 2 Rectangular | Not Selected |   | Zone 2 Rectangular          | Not Selected |
|---|--------------------|--------------|---|-----------------------------|--------------|
| Invert of Vertical Orifice -                  | N/A                | N/A          | ft (relative to basin bottom at Stage = 0 ft) | Vertical Orifice Area -     | N/A          |
| Depth at top of Zone using Vertical Orifice - | N/A                | N/A          | ft (relative to basin bottom at Stage = 0 ft) | Vertical Orifice Centroid - | N/A          |
| Vertical Orifice Height -                     | N/A                | N/A          | inches  |                             |              |
| Vertical Orifice Width -                      |                    |              | inches  |                             |              |

**User Input - Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe, NB Rectangular/Trapezoidal Weir, Dard, No Outlet Pipe)**

|                                      | Zone 3 Weir | Not Selected |   | Zone 3 Weir                                  | Not Selected |
|--------------------------------------|-------------|--------------|---|--|--------------|
| Overflow Weir Front Edge Height, H - | 7.30        | N/A          | ft (relative to basin bottom at Stage = 0 ft) | Height of Grate Upper Edge, H <sub>u</sub> - | 7.30         |
| Overflow Weir Front Edge Length -    | 20.00       | N/A          | feet  | Overflow Weir Slope Length -                 | 6.00         |
| Overflow Weir Grate Slope -          | 0.00        | N/A          | H:V   | Grate Open Area / 100-y Orifice Area -       | 6.48         |
| Horiz. Length of Weir Sides -        | 6.00        | N/A          | feet  | Overflow Grate Open Area w/o Debris -        | 84.00        |
| Overflow Grate Open Area % -         | 70%         | N/A          | %, grate open area/total area                 | Overflow Grate Open Area / Debris -          | 42.00        |
| Debris Chocking % -                  | 50%         | N/A          | %   |  |              |

**User Input - Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)**

|   | Zone 3 Restrictor | Not Selected |  | Zone 3 Restrictor                                | Not Selected |
|---|-------------------|--------------|--|--|--------------|
| Depth to Invert of Outlet Pipe -            | 2.25              | N/A          | ft (distance below basin bottom at Stage = 0 ft) | Outlet Orifice Area -                            | 12.96        |
| Outlet Pipe Diameter -                      | 54.00             | N/A          | inches   | Outlet Orifice Centroid -                        | 1.88         |
| Restrictor Plate Height Above Pipe Invert - | 41.00             |              | inches   | Half-Central Angle of Restrictor Plate on Pipe - | 2.12         |
|   |                   |              |  |  | rad          |

**User Input - Emergency Spillway (Rectangular or Trapezoidal)**

| Spillway Invert Stage -             | 8.50  | ft (relative to basin bottom at Stage = 0 ft) | Spillway Design Flow Depth -       | 1.74  | feet    |
|-------------------------------------|-------|---|------------------------------------|-------|---------|
| Spillway Crest Length -             | 48.00 | feet  | Stage at Top of Freeboard -        | 12.24 | feet    |
| Spillway End Slopes -               | 10.00 | H:V   | Basin Area at Top of Freeboard -   | 4.83  | acres   |
| Freeboard above Max Water Surface - | 2.00  | feet  | Basin Volume at Top of Freeboard - | 27.61 | acre-ft |




## Model Hydrograph Results

The user can override the default CUPP hydrographs and outfall volumes by entering new values in the Inflow Hydrographs table. (Columns 19 through 22)

|  | WOCV  | EURV   | 2 Year | 5 Year | 10 Year         | 25 Year         | 50 Year         | 100 Year        | 500 Year |
|--|-------|--------|--------|--------|-----------------|-----------------|-----------------|-----------------|----------|
| Design Storm Return Period                   |       |        |        |        |                 |                 |                 |                 |          |
| One-Hour Rainfall Depth (in)                 | N/A   | N/A    | 1.19   | 1.50   | 1.75            | 2.00            | 2.25            | 2.52            | 3.14     |
| CUPP Runoff Volume (ac-ft)                   | 3.311 | 11.843 | 9.121  | 11.991 | 14.334          | 18.244          | 21.510          | 26.733          | 34.734   |
| Inflow Hydrograph Volume (ac-ft)             | N/A   | N/A    | 9.121  | 11.991 | 14.334          | 18.244          | 21.510          | 25.732          | 34.734   |
| CUPP Pradeposiment Peak Q (cfs)              | N/A   | N/A    | 1.6    | 2.9    | 5.1             | 54.6            | 85.6            | 128.5           | 217.8    |
| OPTIONAL Override Pradeposiment Peak Q (cfs) | N/A   | N/A    |        |        |                 |                 |                 |                 |          |
| Pradeposiment Unit Peak Flow, q (cfs/acre)   | N/A   | N/A    | 0.01   | 0.02   | 0.03            | 0.31            | 0.49            | 0.74            | 1.25     |
| Pradeposiment Unit Peak Inflow Q (cfs)       | N/A   | N/A    | 140.5  | 186.5  | 222.1           | 301.6           | 361.5           | 431.2           | 586.0    |
| Peak Outflow Q (cfs)                         | 1.7   | 3.4    | 3.0    | 3.4    | 5.1             | 38.8            | 77.3            | 139.3           | 252.7    |
| Ratio Peak Outflow to Pradeposiment Q -      | Plate | Plate  | N/A    | 1.2    | 1.0             | 0.7             | 0.9             | 1.1             | 1.2      |
| Structure Controlling Flow -                 | Plate | Plate  | Plate  | Plate  | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Spillway |
| Max Velocity through Grate 1 (fps)           | N/A   | N/A    | N/A    | N/A    | 0.0             | 0.4             | 0.9             | 1.6             | 2.2      |
| Max Velocity through Grate 2 (fps)           | N/A   | N/A    | N/A    | N/A    | N/A             | N/A             | N/A             | N/A             | N/A      |
| Time to Drain 97% of Inflow Volume (hour)    | 38    | 70     | 63     | 71     | 78              | 76              | 75              | 73              | 70       |
| Time to Drain 99% of Inflow Volume (hour)    | 40    | 78     | 67     | 77     | 84              | 84              | 83              | 82              | 81       |
| Maximum Ponding Depth (ft)                   | 4.13  | 6.88   | 5.98   | 6.77   | 7.35            | 7.76            | 8.05            | 8.43            | 9.04     |
| Area at Maximum Ponding Depth (ac-ft)        | 2.23  | 3.78   | 3.37   | 3.73   | 3.96            | 4.10            | 4.19            | 4.31            | 4.47     |
| Maximum Volume Stored (ac-ft)                | 3.320 | 11.847 | 8.616  | 11.396 | 13.666          | 15.319          | 16.522          | 18.138          | 20.774   |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

*MMFD- Detention, Version 4.00 (December 2019)*

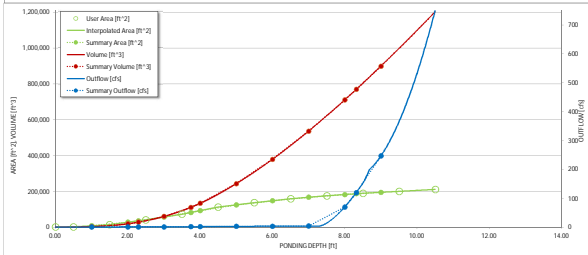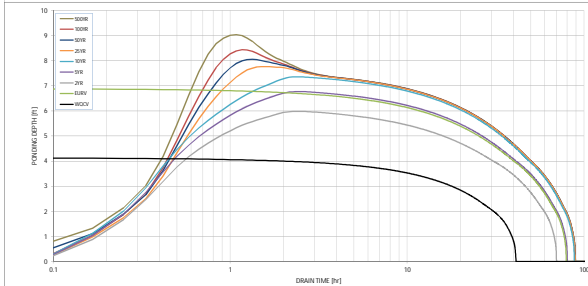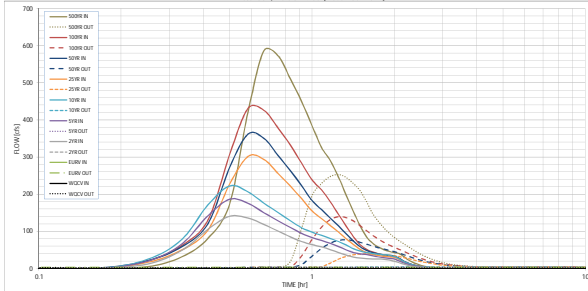

S-S-V-D Chart 1 Axis Overlaid: X-axis Left Y-Axis Right Y-Axis  
 minimum bound maximum bound



## DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: \_\_\_\_\_

**Inflow Hydrographs**

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

| Time Interval | SOURCE  | CUHP       | CUHP       | CUHP         | CUHP         | CUHP          | CUHP          | CUHP          | CUHP           | CUHP           |
|---------------|---------|------------|------------|--------------|--------------|---------------|---------------|---------------|----------------|----------------|
|               | TIME    | WQCV [cfs] | EURV [cfs] | 2 Year [cfs] | 5 Year [cfs] | 10 Year [cfs] | 25 Year [cfs] | 50 Year [cfs] | 100 Year [cfs] | 500 Year [cfs] |
| 5.00 min      | 0:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 1.37          | 0.14           | 4.42           |
|               | 0:15:00 | 0.00       | 0.00       | 12.01        | 19.62        | 24.38         | 16.41         | 21.13         | 20.11          | 30.88          |
|               | 0:20:00 | 0.00       | 0.00       | 48.30        | 65.33        | 77.56         | 49.45         | 58.16         | 61.60          | 81.16          |
|               | 0:25:00 | 0.00       | 0.00       | 105.72       | 142.84       | 171.74        | 104.07        | 121.39        | 131.21         | 174.25         |
|               | 0:30:00 | 0.00       | 0.00       | 140.48       | 186.46       | 222.13        | 227.64        | 272.85        | 308.13         | 402.01         |
|               | 0:35:00 | 0.00       | 0.00       | 135.46       | 175.22       | 206.02        | 301.41        | 363.54        | 431.24         | 585.96         |
|               | 0:40:00 | 0.00       | 0.00       | 118.36       | 150.07       | 175.48        | 290.61        | 350.26        | 425.82         | 573.28         |
|               | 0:45:00 | 0.00       | 0.00       | 100.92       | 128.44       | 150.65        | 256.40        | 304.92        | 378.98         | 510.45         |
| 0:50:00       | 0.00    | 0.00       | 84.87      | 110.40       | 128.43       | 222.14        | 263.81        | 332.30        | 449.36         |                |
| 0:55:00       | 0.00    | 0.00       | 72.36      | 94.33        | 109.32       | 187.66        | 222.42        | 282.99        | 384.40         |                |
| 1:00:00       | 0.00    | 0.00       | 64.06      | 83.13        | 97.59        | 154.96        | 182.98        | 238.59        | 325.88         |                |
| 1:05:00       | 0.00    | 0.00       | 58.14      | 75.08        | 88.94        | 134.19        | 158.26        | 211.50        | 290.49         |                |
| 1:10:00       | 0.00    | 0.00       | 50.72      | 67.68        | 80.67        | 115.60        | 135.72        | 179.70        | 246.12         |                |
| 1:15:00       | 0.00    | 0.00       | 42.71      | 59.28        | 72.45        | 97.95         | 114.20        | 145.50        | 197.60         |                |
| 1:20:00       | 0.00    | 0.00       | 35.76      | 50.04        | 63.10        | 80.42         | 93.20         | 113.95        | 153.88         |                |
| 1:25:00       | 0.00    | 0.00       | 30.54      | 42.87        | 53.10        | 64.63         | 74.31         | 85.95         | 114.90         |                |
| 1:30:00       | 0.00    | 0.00       | 27.71      | 39.21        | 46.68        | 51.11         | 58.33         | 64.24         | 85.13          |                |
| 1:35:00       | 0.00    | 0.00       | 26.36      | 37.32        | 42.89        | 47.74         | 48.57         | 51.53         | 67.73          |                |
| 1:40:00       | 0.00    | 0.00       | 25.40      | 34.28        | 40.22        | 37.77         | 42.78         | 44.23         | 57.57          |                |
| 1:45:00       | 0.00    | 0.00       | 25.13      | 31.06        | 38.26        | 34.61         | 39.11         | 39.26         | 50.51          |                |
| 1:50:00       | 0.00    | 0.00       | 24.76      | 28.74        | 36.93        | 32.45         | 36.59         | 36.99         | 45.78          |                |
| 1:55:00       | 0.00    | 0.00       | 22.48      | 27.05        | 35.35        | 31.03         | 34.94         | 33.68         | 42.43          |                |
| 2:00:00       | 0.00    | 0.00       | 19.58      | 25.23        | 32.57        | 30.00         | 33.77         | 32.06         | 40.11          |                |
| 2:05:00       | 0.00    | 0.00       | 15.52      | 20.27        | 25.90        | 24.54         | 22.57         | 26.26         | 32.38          |                |
| 2:10:00       | 0.00    | 0.00       | 11.36      | 14.69        | 18.66        | 17.66         | 19.83         | 18.68         | 23.23          |                |
| 2:15:00       | 0.00    | 0.00       | 8.25       | 10.65        | 13.46        | 12.75         | 14.30         | 13.52         | 16.79          |                |
| 2:20:00       | 0.00    | 0.00       | 5.94       | 7.66         | 9.70         | 9.23          | 10.34         | 9.85          | 12.22          |                |
| 2:25:00       | 0.00    | 0.00       | 4.23       | 5.34         | 6.86         | 6.50          | 7.28          | 6.96          | 8.63           |                |
| 2:30:00       | 0.00    | 0.00       | 2.91       | 3.63         | 4.77         | 4.51          | 5.04          | 4.82          | 5.97           |                |
| 2:35:00       | 0.00    | 0.00       | 1.96       | 2.50         | 3.30         | 3.19          | 3.57          | 3.40          | 4.20           |                |
| 2:40:00       | 0.00    | 0.00       | 1.21       | 1.65         | 2.12         | 2.10          | 2.34          | 2.23          | 2.75           |                |
| 2:45:00       | 0.00    | 0.00       | 0.68       | 0.97         | 1.20         | 1.24          | 1.38          | 1.31          | 1.60           |                |
| 2:50:00       | 0.00    | 0.00       | 0.28       | 0.47         | 0.55         | 0.60          | 0.66          | 0.61          | 0.76           |                |
| 2:55:00       | 0.00    | 0.00       | 0.00       | 0.15         | 0.16         | 0.19          | 0.20          | 0.19          | 0.22           |                |
| 3:00:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:05:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:10:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:15:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:20:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:25:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:30:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:35:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:40:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:45:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:50:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 3:55:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:00:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:05:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:10:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:15:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:20:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:25:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:30:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:35:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:40:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:45:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:50:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 4:55:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:00:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:05:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:10:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:15:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:20:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:25:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:30:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:35:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:40:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:45:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:50:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 5:55:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |
| 6:00:00       | 0.00    | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           |                |









# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

*MHFD-Detention, Version 4.03 (May 2020)*

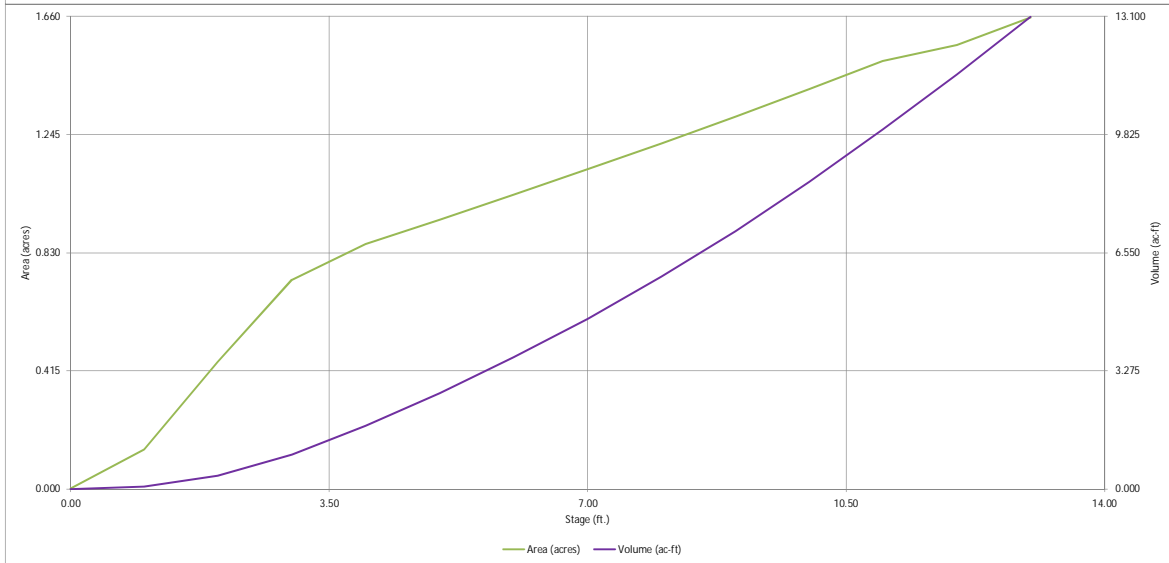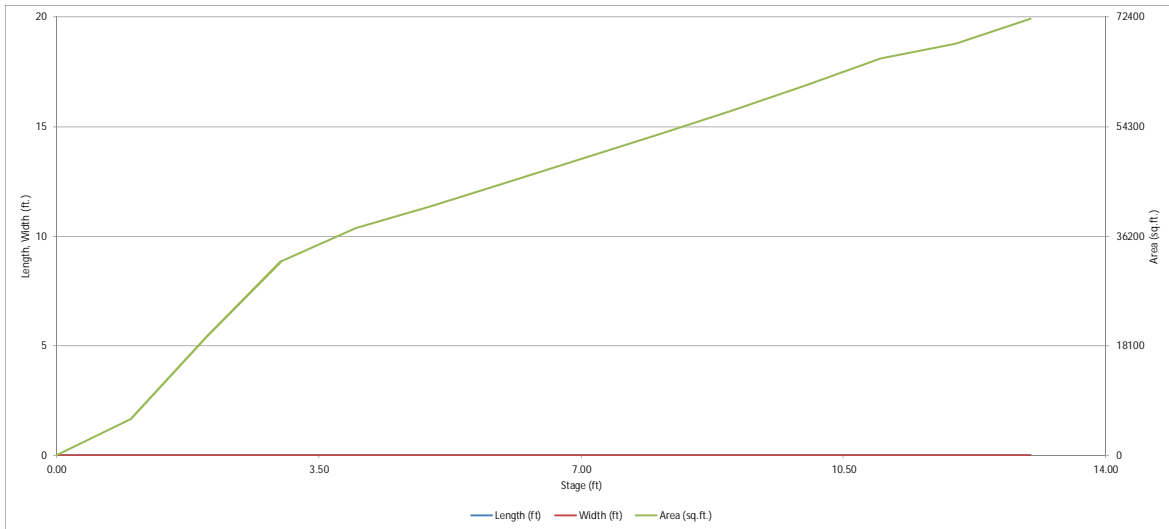


# DETENTION BASIN OUTLET STRUCTURE DESIGN

*MHFD-Detention, Version 4.03 (May 2020)*

**Project:** STERLING RANCH FILING NO. 2

**Basin ID:** POND W4 Interim



**Example Zone Configuration (Retention Pond)**

|                          | Estimated Stage (ft) | Estimated Volume (ac-ft) | Outlet Type          |
|--------------------------|----------------------|--------------------------|----------------------|
| Zone 1 (WQCV)            | 4.61                 | 2.281                    | Orifice Plate        |
| Zone 2 (EURV)            | 6.07                 | 1.429                    | Orifice Plate        |
| Zone 3 (100-year)        | 12.46                | 8.500                    | Weir&Pipe (Restrict) |
| <b>Total (all zones)</b> |                      | <b>12.211</b>            |                      |

**User Input:** Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =  ft (distance below the filtration media surface)  
 Underdrain Orifice Diameter =  inches

**Calculated Parameters for Underdrain**  
 Underdrain Orifice Area =  ft<sup>2</sup>  
 Underdrain Orifice Centroid =  feet

**User Input:** Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =  0.00 ft (relative to basin bottom at Stage = 0 ft)  
 Depth at top of Zone using Orifice Plate =  4.99 ft (relative to basin bottom at Stage = 0 ft)  
 Orifice Plate: Orifice Vertical Spacing =  N/A inches  
 Orifice Plate: Orifice Area per Row =  6.80 sq. inches (use rectangular openings)

**Calculated Parameters for Plate**  
 WQ Orifice Area per Row =  4.722E-02 ft<sup>2</sup>  
 Elliptical Half-Width =  N/A feet  
 Elliptical Slot Centroid =  N/A feet  
 Elliptical Slot Area =  N/A ft<sup>2</sup>

**User Input:** Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 1.66             | 3.33             |                  |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 6.80             | 6.80             | 6.80             |                  |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

**User Input:** Vertical Orifice (Circular or Rectangular)

Invert of Vertical Orifice =  Not Selected  Not Selected ft (relative to basin bottom at Stage = 0 ft)  
 Depth at top of Zone using Vertical Orifice =  N/A  N/A ft (relative to basin bottom at Stage = 0 ft)  
 Vertical Orifice Diameter =  N/A  N/A inches

**Calculated Parameters for Vertical Orifice**  
 Vertical Orifice Area =  Not Selected  Not Selected ft<sup>2</sup>  
 Vertical Orifice Centroid =  N/A  N/A feet

**User Input:** Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))

|                                       | Zone 3 Weir | Not Selected |
|---------------------------------------|-------------|--------------|
| Overflow Weir Front Edge Height, Ho = | 6.07        | N/A          |
| Overflow Weir Front Edge Length =     | 20.00       | N/A          |
| Overflow Weir Grate Slope =           | 4.00        | N/A          |
| Horiz. Length of Weir Sides =         | 10.00       | N/A          |
| Overflow Grate Open Area % =          | 70%         | N/A          |
| Debris Clogging % =                   | 50%         | N/A          |

**Calculated Parameters for Overflow Weir**  
 Height of Grate Upper Edge, H<sub>u</sub> =  Not Selected  Not Selected feet  
 Overflow Weir Slope Length =  10.31  N/A feet  
 Grate Open Area / 100-yr Orifice Area =  6.46  N/A  
 Overflow Grate Open Area w/o Debris =  144.31  N/A ft<sup>2</sup>  
 Overflow Grate Open Area w/ Debris =  72.15  N/A ft<sup>2</sup>

**User Input:** Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

|   | Zone 3 Restrictor | Not Selected |
|---|-------------------|--------------|
| Depth to Invert of Outlet Pipe =            | 0.58              | N/A          |
| Outlet Pipe Diameter =                      | 66.00             | N/A          |
| Restrictor Plate Height Above Pipe Invert = | 58.80             |              |

**Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate**  
 Outlet Orifice Area =  Zone 3 Restrictor  Not Selected ft<sup>2</sup>  
 Outlet Orifice Centroid =  2.60  N/A feet  
 Half-Central Angle of Restrictor Plate on Pipe =  2.47  N/A radians

**User Input:** Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage =  9.50 ft (relative to basin bottom at Stage = 0 ft)  
 Spillway Crest Length =  74.00 feet  
 Spillway End Slopes =  4.00 H:V  
 Freeboard above Max Water Surface =  1.50 feet

**Calculated Parameters for Spillway**  
 Spillway Design Flow Depth =  1.20 feet  
 Stage at Top of Freeboard =  12.20 feet  
 Basin Area at Top of Freeboard =  1.58 acres  
 Basin Volume at Top of Freeboard =  11.80 acre-ft




**Routed Hydrograph Results**

*The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).*

|   | WQCV  | EURV            | 2 Year | 5 Year          | 10 Year         | 25 Year         | 50 Year         | 100 Year        | 500 Year |
|---|-------|-----------------|--------|-----------------|-----------------|-----------------|-----------------|-----------------|----------|
| Design Storm Return Period =                    | N/A   | N/A             | 1.19   | 1.50            | 1.75            | 2.00            | 2.25            | 2.52            | 3.14     |
| One-Hour Rainfall Depth (in) =                  | N/A   | N/A             | 1.19   | 1.50            | 1.75            | 2.00            | 2.25            | 2.52            | 3.14     |
| CUHP Runoff Volume (acre-ft) =                  | 2.281 | 3.710           | 2.802  | 6.573           | 10.859          | 20.281          | 26.707          | 36.815          | 54.041   |
| Inflow Hydrograph Volume (acre-ft) =            | N/A   | N/A             | 2.802  | 6.573           | 10.859          | 20.281          | 26.707          | 36.815          | 54.041   |
| CUHP Predevelopment Peak Q (cfs) =              | N/A   | N/A             | 3.7    | 30.4            | 64.6            | 150.7           | 203.5           | 280.5           | 416.0    |
| OPTIONAL Override Predevelopment Peak Q (cfs) = | N/A   | N/A             |        |                 |                 |                 |                 |                 |          |
| Predevelopment Unit Peak Flow, q (cfs/acre) =   | N/A   | N/A             | 0.01   | 0.09            | 0.18            | 0.43            | 0.58            | 0.80            | 1.19     |
| Peak Inflow Q (cfs) =                           | N/A   | N/A             | 23.4   | 55.7            | 91.6            | 179.7           | 233.5           | 308.1           | 444.7    |
| Peak Outflow Q (cfs) =                          | 1.1   | 1.4             | 1.2    | 20.7            | 54.4            | 141.3           | 198.4           | 285.0           | 433.1    |
| Ratio Peak Outflow to Predevelopment Q =        | N/A   | N/A             | N/A    | 0.7             | 0.8             | 0.9             | 1.0             | 1.0             | 1.0      |
| Structure Controlling Flow =                    | Plate | Overflow Weir 1 | Plate  | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Overflow Weir 1 | Spillway |
| Max Velocity through Gate 1 (fps) =             | N/A   | N/A             | N/A    | 0.1             | 0.4             | 1.0             | 1.4             | 2.0             | 2.1      |
| Max Velocity through Gate 2 (fps) =             | N/A   | N/A             | N/A    | N/A             | N/A             | N/A             | N/A             | N/A             | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =    | 42    | 53              | 48     | 55              | 51              | 44              | 40              | 35              | 27       |
| Time to Drain 99% of Inflow Volume (hours) =    | 45    | 57              | 51     | 61              | 59              | 55              | 53              | 50              | 46       |
| Maximum Ponding Depth (ft) =                    | 4.61  | 6.07            | 4.85   | 6.72            | 7.28            | 8.21            | 8.68            | 9.28            | 10.17    |
| Area at Maximum Ponding Depth (acres) =         | 0.91  | 1.04            | 0.93   | 1.10            | 1.15            | 1.23            | 1.28            | 1.33            | 1.42     |
| Maximum Volume Stored (acre-ft) =               | 2.290 | 3.714           | 2.511  | 4.398           | 5.039           | 6.146           | 6.736           | 7.506           | 8.745    |

# DETENTION BASIN OUTLET STRUCTURE DESIGN

*MHFD-Detention, Version 4.00 (December 2019)*

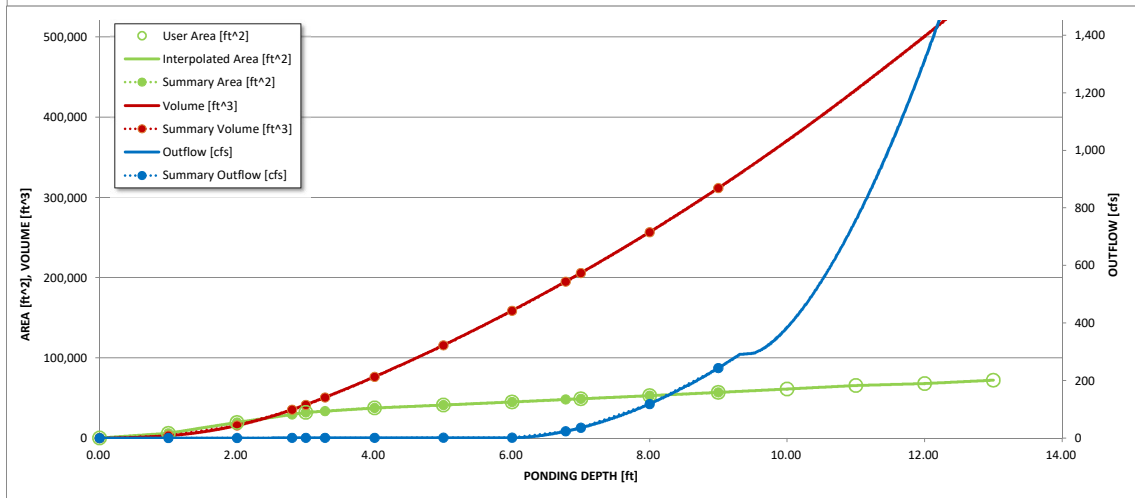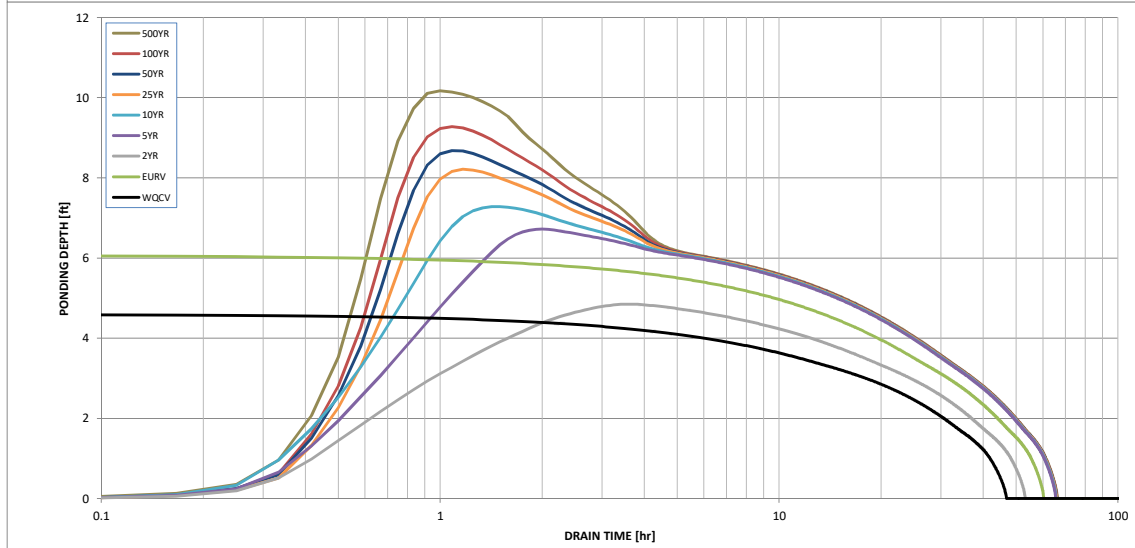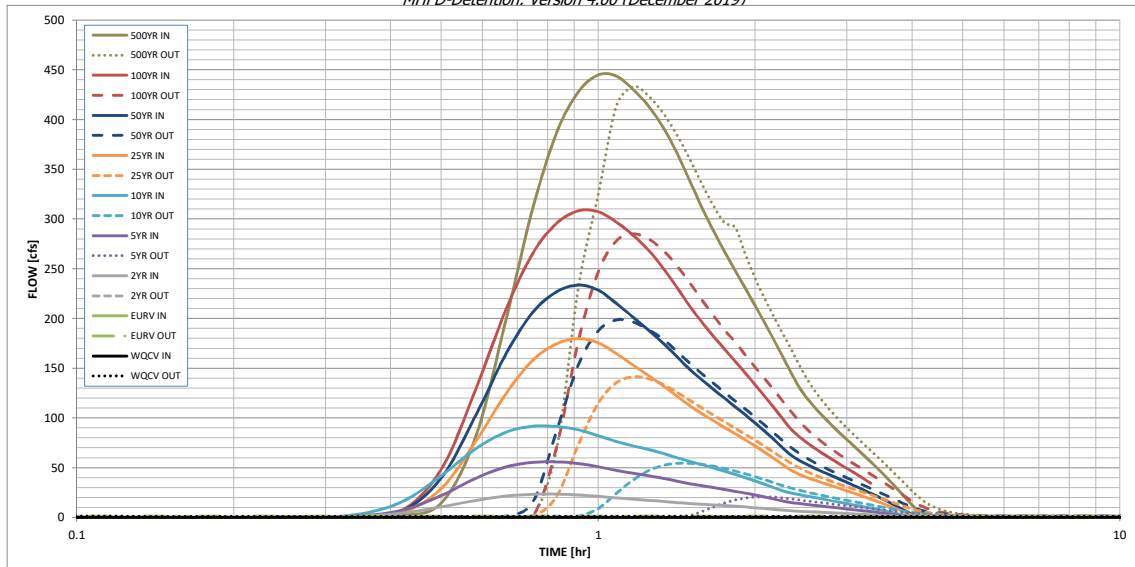

S-A-V-D Chart Axis Override

|               | X-axis | Left Y-Axis | Right Y-Axis |
|---------------|--------|-------------|--------------|
| minimum bound |        |             |              |
| maximum bound |        |             |              |



# DETENTION BASIN OUTLET STRUCTURE DESIGN

*Outflow Hydrograph Workbook Filename:* \_\_\_\_\_

## Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

| Time Interval | SOURCE  | CUHP       | CUHP       | CUHP         | CUHP         | CUHP          | CUHP          | CUHP          | CUHP           | CUHP           |
|---------------|---------|------------|------------|--------------|--------------|---------------|---------------|---------------|----------------|----------------|
|               | TIME    | WQCV [cfs] | EURV [cfs] | 2 Year [cfs] | 5 Year [cfs] | 10 Year [cfs] | 25 Year [cfs] | 50 Year [cfs] | 100 Year [cfs] | 500 Year [cfs] |
| 5.00 min      | 0:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:05:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 0:10:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.02          | 0.00           | 0.05           |
|               | 0:15:00 | 0.00       | 0.00       | 0.13         | 0.22         | 0.27          | 0.19          | 0.26          | 0.23           | 0.41           |
|               | 0:20:00 | 0.00       | 0.00       | 0.70         | 1.03         | 1.91          | 0.80          | 0.98          | 0.99           | 1.99           |
|               | 0:25:00 | 0.00       | 0.00       | 4.05         | 6.62         | 14.64         | 3.93          | 5.22          | 5.86           | 14.30          |
|               | 0:30:00 | 0.00       | 0.00       | 10.59        | 21.88        | 41.83         | 28.88         | 39.54         | 48.08          | 81.91          |
|               | 0:35:00 | 0.00       | 0.00       | 17.09        | 39.51        | 69.21         | 76.76         | 103.22        | 129.56         | 199.96         |
|               | 0:40:00 | 0.00       | 0.00       | 21.42        | 50.84        | 85.74         | 124.91        | 164.83        | 209.85         | 311.38         |
|               | 0:45:00 | 0.00       | 0.00       | 23.26        | 55.39        | 91.58         | 158.09        | 206.35        | 265.79         | 387.19         |
|               | 0:50:00 | 0.00       | 0.00       | 23.43        | 55.73        | 91.37         | 174.59        | 226.89        | 295.75         | 427.74         |
|               | 0:55:00 | 0.00       | 0.00       | 22.60        | 54.20        | 87.99         | 179.69        | 233.50        | 308.15         | 444.73         |
|               | 1:00:00 | 0.00       | 0.00       | 21.09        | 50.99        | 82.12         | 175.52        | 228.49        | 307.36         | 443.68         |
|               | 1:05:00 | 0.00       | 0.00       | 19.58        | 47.22        | 76.30         | 164.74        | 215.25        | 296.89         | 430.21         |
|               | 1:10:00 | 0.00       | 0.00       | 18.33        | 44.40        | 71.93         | 153.13        | 201.32        | 283.81         | 413.28         |
|               | 1:15:00 | 0.00       | 0.00       | 17.16        | 41.96        | 68.16         | 142.50        | 188.13        | 268.44         | 391.95         |
|               | 1:20:00 | 0.00       | 0.00       | 16.00        | 39.30        | 64.26         | 132.29        | 174.98        | 250.51         | 366.18         |
|               | 1:25:00 | 0.00       | 0.00       | 14.87        | 36.45        | 60.01         | 122.00        | 161.53        | 231.17         | 338.13         |
|               | 1:30:00 | 0.00       | 0.00       | 13.96        | 33.90        | 56.25         | 112.10        | 148.57        | 212.08         | 310.76         |
|               | 1:35:00 | 0.00       | 0.00       | 13.21        | 31.96        | 52.94         | 104.00        | 137.94        | 195.94         | 287.45         |
|               | 1:40:00 | 0.00       | 0.00       | 12.50        | 30.03        | 49.64         | 96.86         | 128.39        | 181.69         | 266.65         |
|               | 1:45:00 | 0.00       | 0.00       | 11.83        | 28.10        | 46.33         | 90.29         | 119.57        | 168.78         | 247.80         |
|               | 1:50:00 | 0.00       | 0.00       | 11.16        | 26.19        | 43.06         | 83.95         | 111.08        | 156.61         | 230.01         |
|               | 1:55:00 | 0.00       | 0.00       | 10.46        | 24.30        | 39.85         | 77.88         | 102.92        | 144.90         | 212.87         |
|               | 2:00:00 | 0.00       | 0.00       | 9.73         | 22.42        | 36.66         | 71.85         | 94.85         | 133.46         | 196.17         |
|               | 2:05:00 | 0.00       | 0.00       | 8.94         | 20.50        | 33.43         | 65.81         | 86.82         | 122.23         | 179.75         |
|               | 2:10:00 | 0.00       | 0.00       | 8.12         | 18.55        | 30.15         | 59.74         | 78.80         | 111.18         | 163.53         |
|               | 2:15:00 | 0.00       | 0.00       | 7.29         | 16.62        | 27.00         | 53.67         | 70.78         | 100.15         | 147.40         |
|               | 2:20:00 | 0.00       | 0.00       | 6.67         | 15.07        | 24.72         | 47.94         | 63.30         | 89.82          | 132.66         |
|               | 2:25:00 | 0.00       | 0.00       | 6.21         | 14.10        | 23.11         | 43.84         | 58.01         | 82.20          | 121.64         |
|               | 2:30:00 | 0.00       | 0.00       | 5.79         | 13.19        | 21.64         | 40.65         | 53.80         | 76.06          | 112.54         |
|               | 2:35:00 | 0.00       | 0.00       | 5.42         | 12.32        | 20.22         | 37.96         | 50.19         | 70.67          | 104.47         |
|               | 2:40:00 | 0.00       | 0.00       | 5.06         | 11.50        | 18.86         | 35.48         | 46.87         | 65.80          | 97.17          |
|               | 2:45:00 | 0.00       | 0.00       | 4.71         | 10.71        | 17.53         | 33.22         | 43.83         | 61.30          | 90.40          |
|               | 2:50:00 | 0.00       | 0.00       | 4.37         | 9.94         | 16.25         | 31.01         | 40.87         | 57.03          | 84.03          |
|               | 2:55:00 | 0.00       | 0.00       | 4.04         | 9.19         | 15.00         | 28.84         | 37.99         | 53.02          | 78.06          |
|               | 3:00:00 | 0.00       | 0.00       | 3.72         | 8.47         | 13.79         | 26.71         | 35.19         | 49.23          | 72.44          |
|               | 3:05:00 | 0.00       | 0.00       | 3.41         | 7.76         | 12.62         | 24.62         | 32.42         | 45.47          | 66.87          |
|               | 3:10:00 | 0.00       | 0.00       | 3.10         | 7.07         | 11.48         | 22.54         | 29.69         | 41.74          | 61.34          |
|               | 3:15:00 | 0.00       | 0.00       | 2.80         | 6.38         | 10.35         | 20.48         | 26.97         | 38.01          | 55.82          |
|               | 3:20:00 | 0.00       | 0.00       | 2.50         | 5.70         | 9.23          | 18.42         | 24.26         | 34.28          | 50.31          |
|               | 3:25:00 | 0.00       | 0.00       | 2.20         | 5.03         | 8.12          | 16.37         | 21.55         | 30.56          | 44.81          |
|               | 3:30:00 | 0.00       | 0.00       | 1.91         | 4.36         | 7.01          | 14.32         | 18.86         | 26.85          | 39.32          |
|               | 3:35:00 | 0.00       | 0.00       | 1.62         | 3.69         | 5.91          | 12.27         | 16.16         | 23.14          | 33.84          |
|               | 3:40:00 | 0.00       | 0.00       | 1.34         | 3.02         | 4.81          | 10.23         | 13.47         | 19.43          | 28.38          |
|               | 3:45:00 | 0.00       | 0.00       | 1.06         | 2.36         | 3.72          | 8.20          | 10.79         | 15.74          | 22.93          |
|               | 3:50:00 | 0.00       | 0.00       | 0.78         | 1.72         | 2.65          | 6.18          | 8.13          | 12.05          | 17.51          |
|               | 3:55:00 | 0.00       | 0.00       | 0.52         | 1.11         | 1.69          | 4.19          | 5.51          | 8.43           | 12.27          |
|               | 4:00:00 | 0.00       | 0.00       | 0.38         | 0.70         | 1.15          | 2.44          | 3.26          | 5.30           | 7.97           |
|               | 4:05:00 | 0.00       | 0.00       | 0.30         | 0.56         | 0.93          | 1.47          | 2.05          | 3.46           | 5.40           |
|               | 4:10:00 | 0.00       | 0.00       | 0.25         | 0.46         | 0.76          | 0.94          | 1.34          | 2.31           | 3.71           |
|               | 4:15:00 | 0.00       | 0.00       | 0.22         | 0.37         | 0.62          | 0.64          | 0.91          | 1.52           | 2.50           |
|               | 4:20:00 | 0.00       | 0.00       | 0.18         | 0.30         | 0.50          | 0.44          | 0.62          | 0.97           | 1.64           |
|               | 4:25:00 | 0.00       | 0.00       | 0.15         | 0.24         | 0.39          | 0.33          | 0.45          | 0.58           | 1.03           |
|               | 4:30:00 | 0.00       | 0.00       | 0.13         | 0.19         | 0.30          | 0.25          | 0.32          | 0.32           | 0.61           |
|               | 4:35:00 | 0.00       | 0.00       | 0.11         | 0.14         | 0.22          | 0.18          | 0.22          | 0.18           | 0.38           |
|               | 4:40:00 | 0.00       | 0.00       | 0.09         | 0.11         | 0.16          | 0.14          | 0.16          | 0.13           | 0.30           |
|               | 4:45:00 | 0.00       | 0.00       | 0.07         | 0.09         | 0.12          | 0.10          | 0.12          | 0.10           | 0.23           |
|               | 4:50:00 | 0.00       | 0.00       | 0.05         | 0.07         | 0.09          | 0.08          | 0.09          | 0.08           | 0.19           |
|               | 4:55:00 | 0.00       | 0.00       | 0.04         | 0.05         | 0.07          | 0.06          | 0.07          | 0.06           | 0.14           |
|               | 5:00:00 | 0.00       | 0.00       | 0.03         | 0.04         | 0.05          | 0.04          | 0.05          | 0.05           | 0.11           |
|               | 5:05:00 | 0.00       | 0.00       | 0.02         | 0.03         | 0.03          | 0.03          | 0.04          | 0.03           | 0.07           |
|               | 5:10:00 | 0.00       | 0.00       | 0.01         | 0.02         | 0.02          | 0.02          | 0.02          | 0.02           | 0.05           |
|               | 5:15:00 | 0.00       | 0.00       | 0.01         | 0.01         | 0.01          | 0.01          | 0.01          | 0.01           | 0.03           |
|               | 5:20:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.01          | 0.01          | 0.01          | 0.01           | 0.01           |
|               | 5:25:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:30:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:35:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:40:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:45:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:50:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 5:55:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |
|               | 6:00:00 | 0.00       | 0.00       | 0.00         | 0.00         | 0.00          | 0.00          | 0.00          | 0.00           | 0.00           |






# STERLING RANCH PONDS W4 & W5 TRIBUTARY AREA EXHIBIT

## LEGEND

- MDDP BASINS
- POND W4 TRIBUTARY AREA
- POND W5 TRIBUTARY AREA
- HISTORIC DBPS SC/EFSC BNDRY LINE
- PROPOSED SC/EFSC BNDRY LINE
- BASIN DIVERSION AREA (EAST FORK SAND CREEK TO SAND CREEK) \* ~267.3 AC

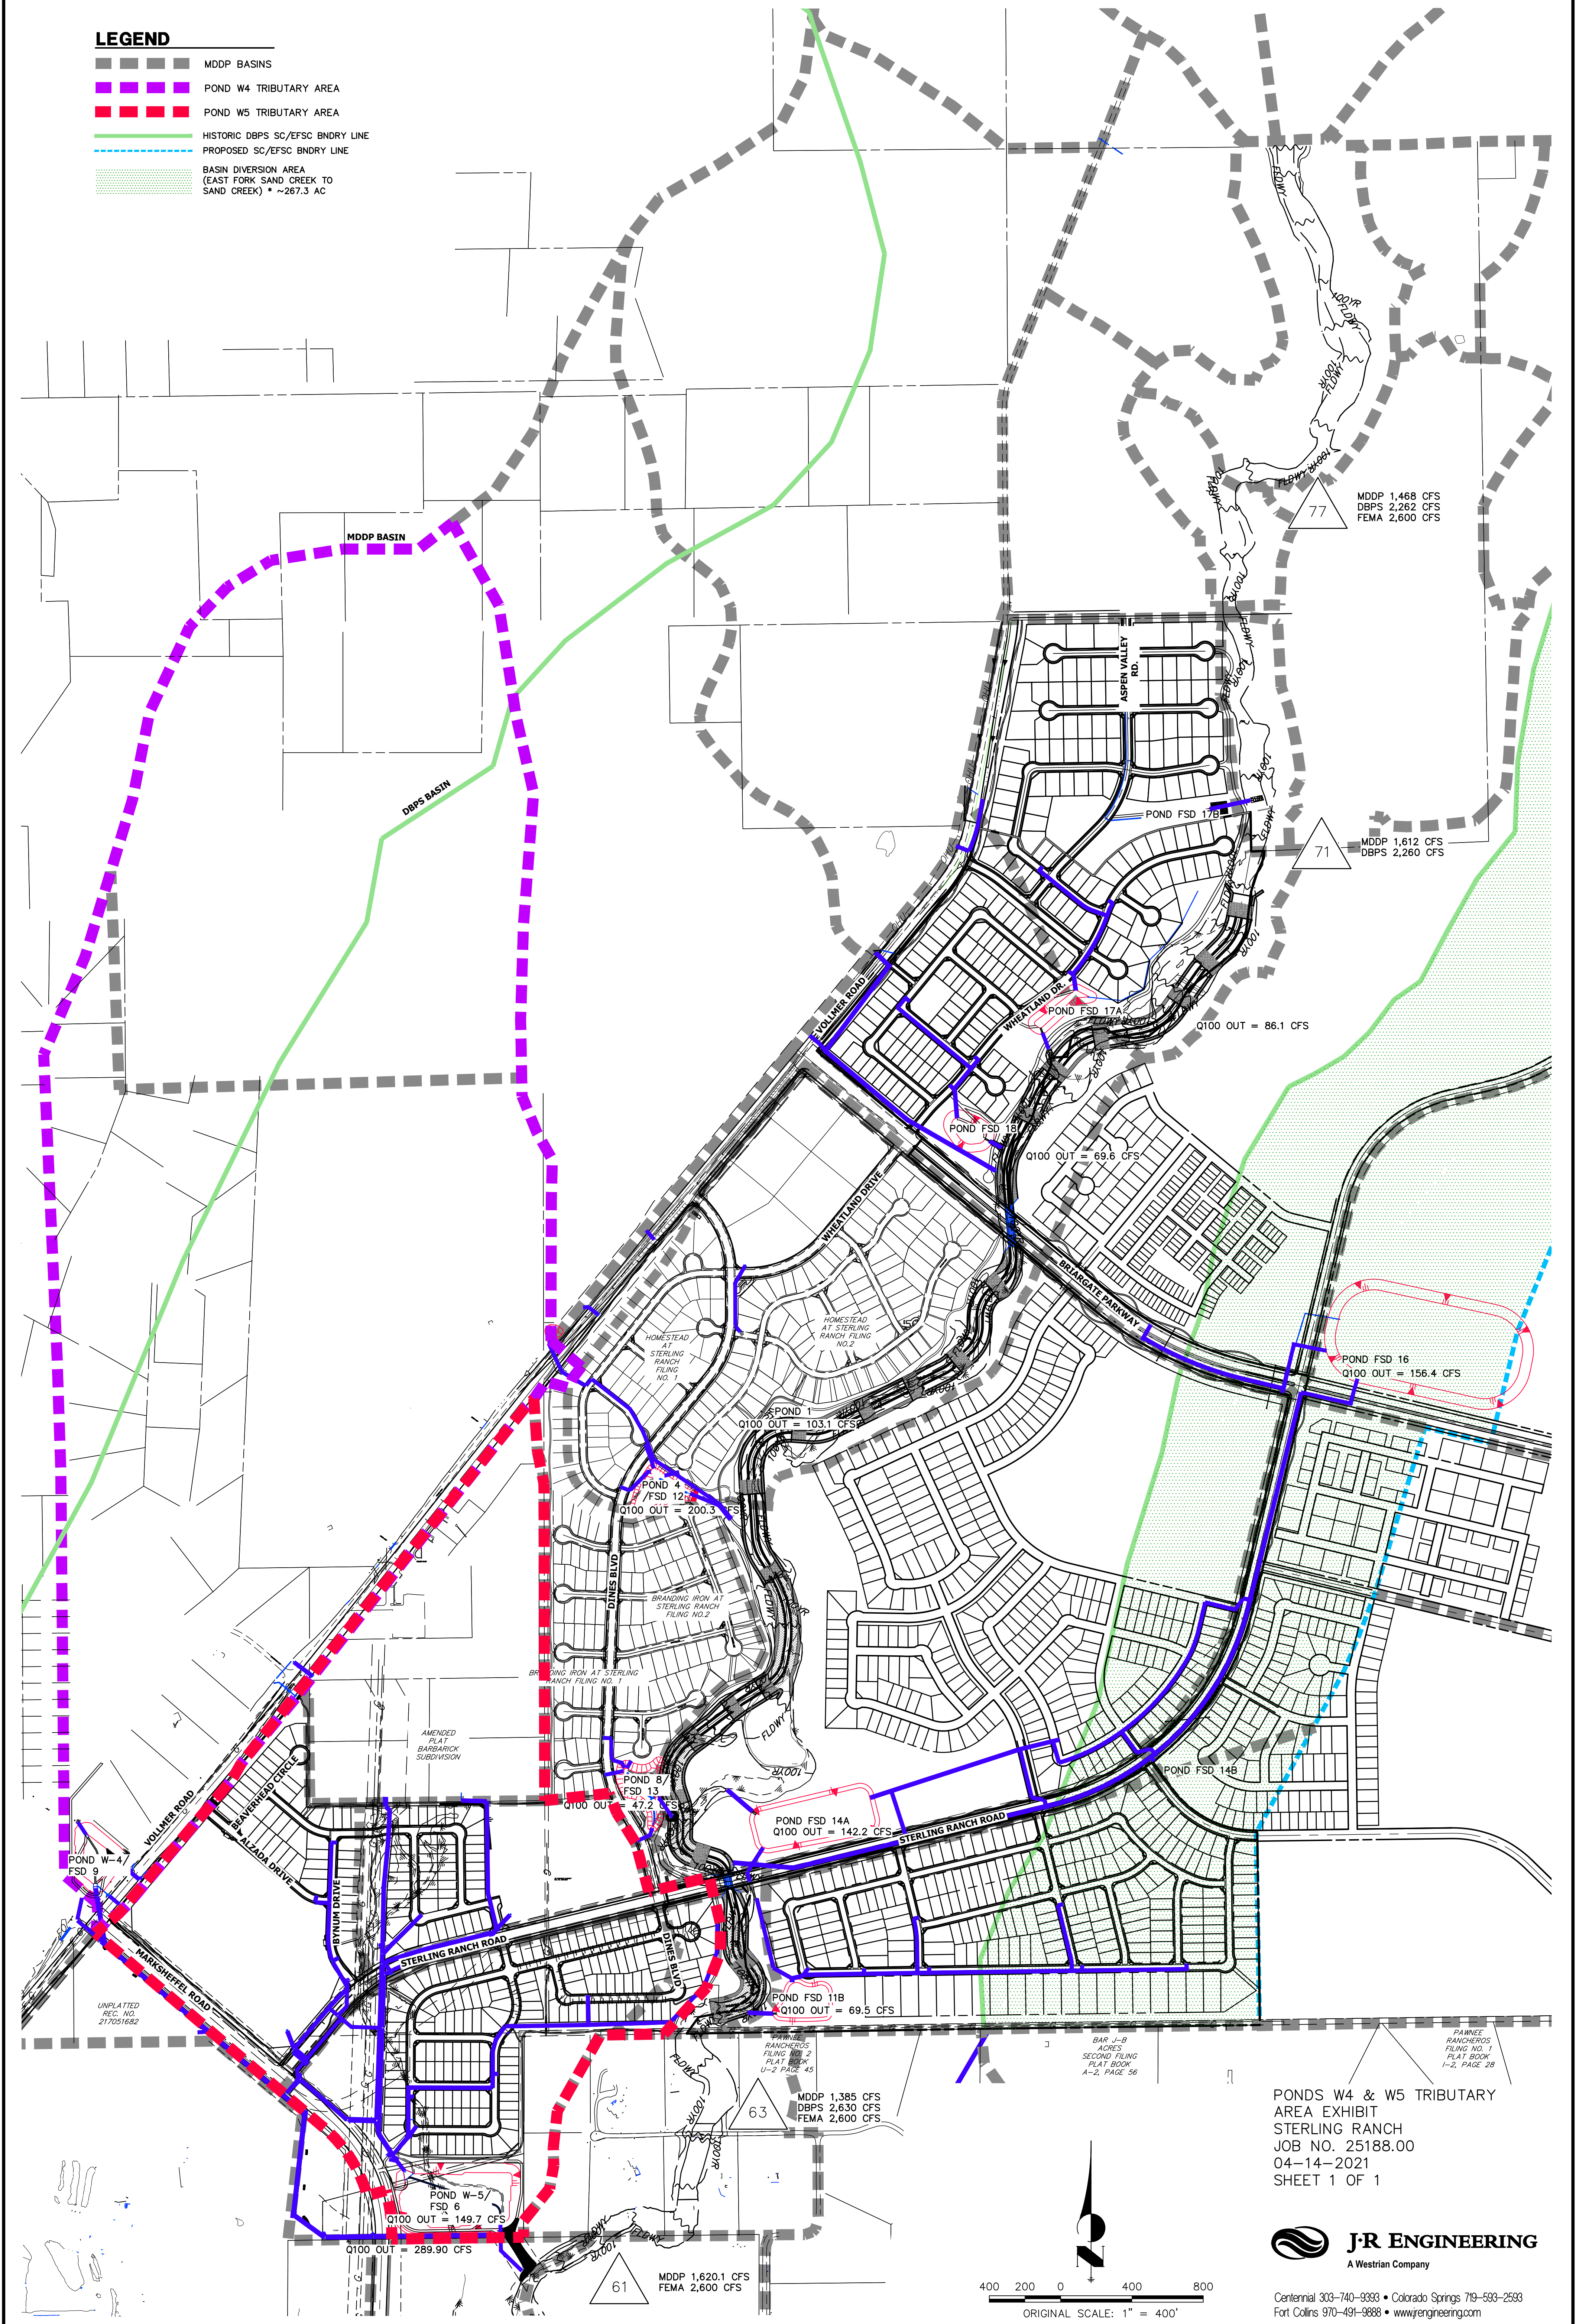


PONDS W4 & W5 TRIBUTARY  
 AREA EXHIBIT  
 STERLING RANCH  
 JOB NO. 25188.00  
 04-14-2021  
 SHEET 1 OF 1

**J-R ENGINEERING**  
 A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com

X:\25188\Drawings\Presentations\2021-4-14 Ponds W4 & W5 Tributary Area.dwg, 24x36 Title Format, 6/23/2021, 12:23:50 PM, FC



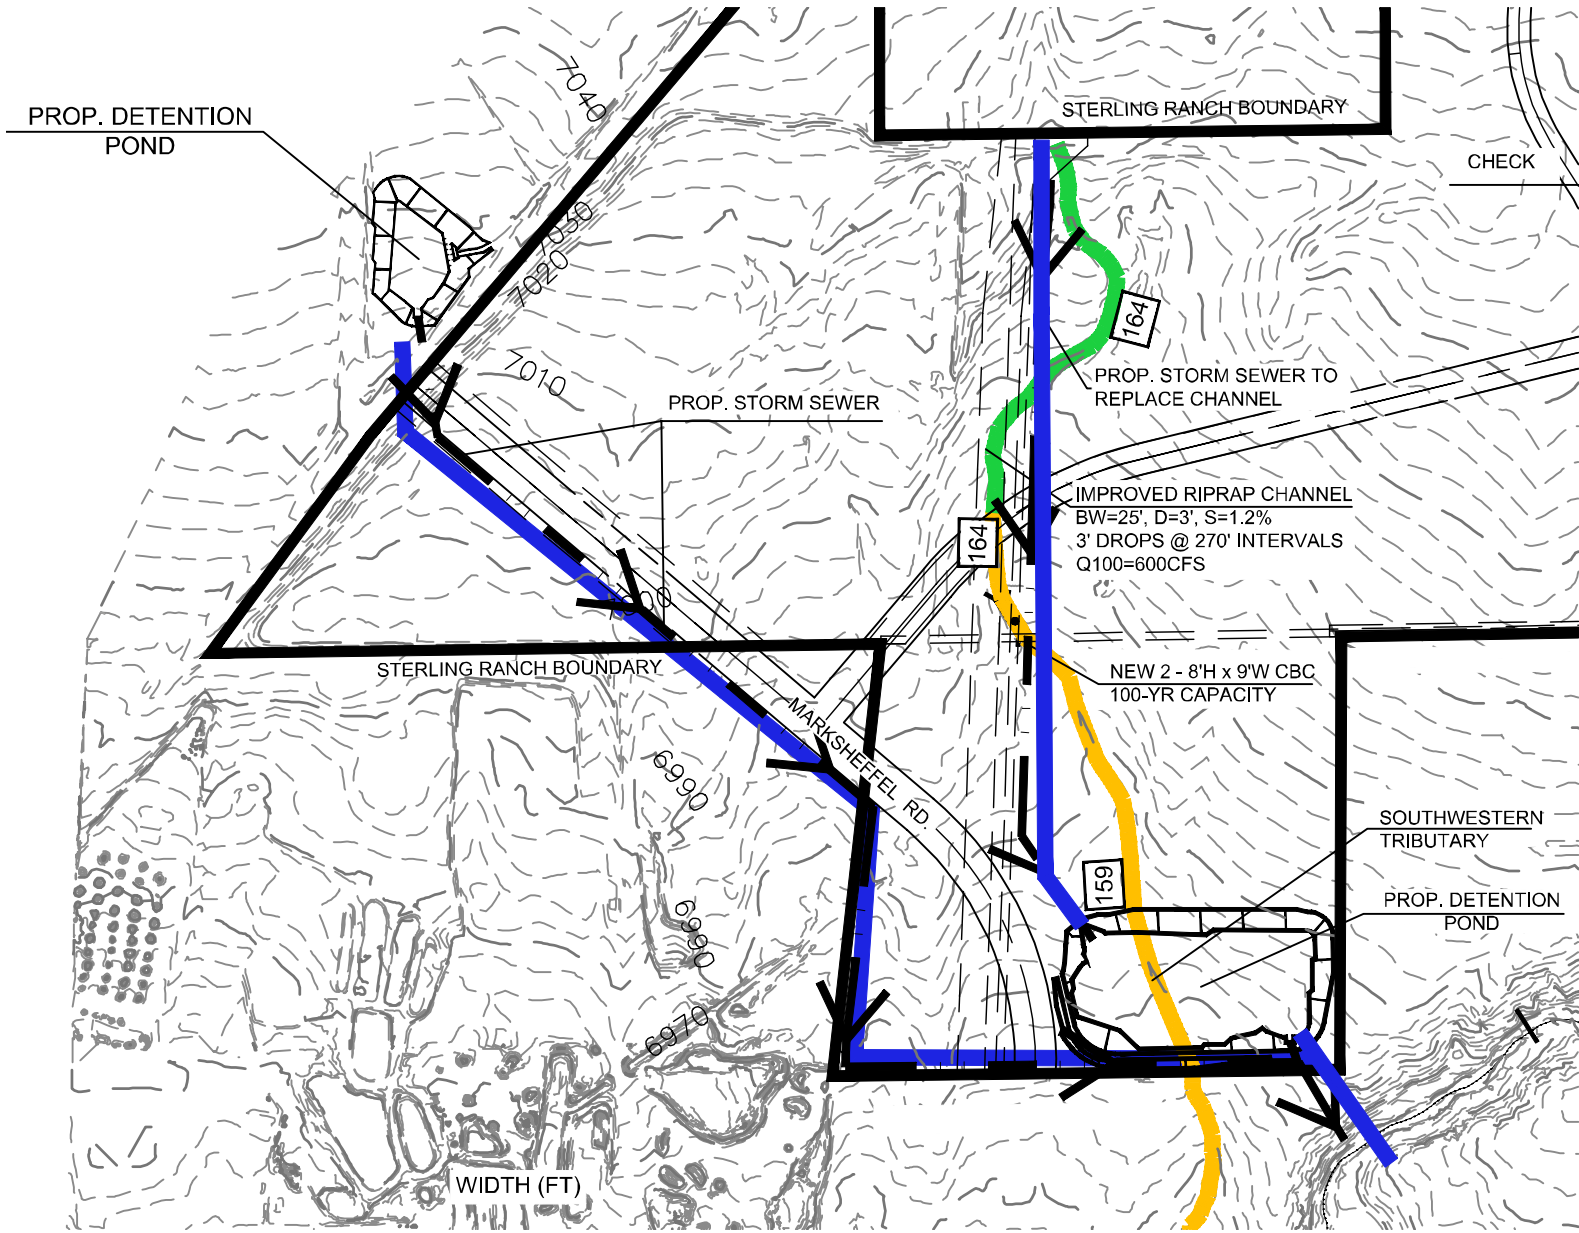


SOUTHWEST TRIBUTARY  
 SHEET 3 OF 5

**APPENDIX E**  
**DRAINAGE MAPS & PLANS**



# STERLING RANCH EXISTING DRAINAGE MAP

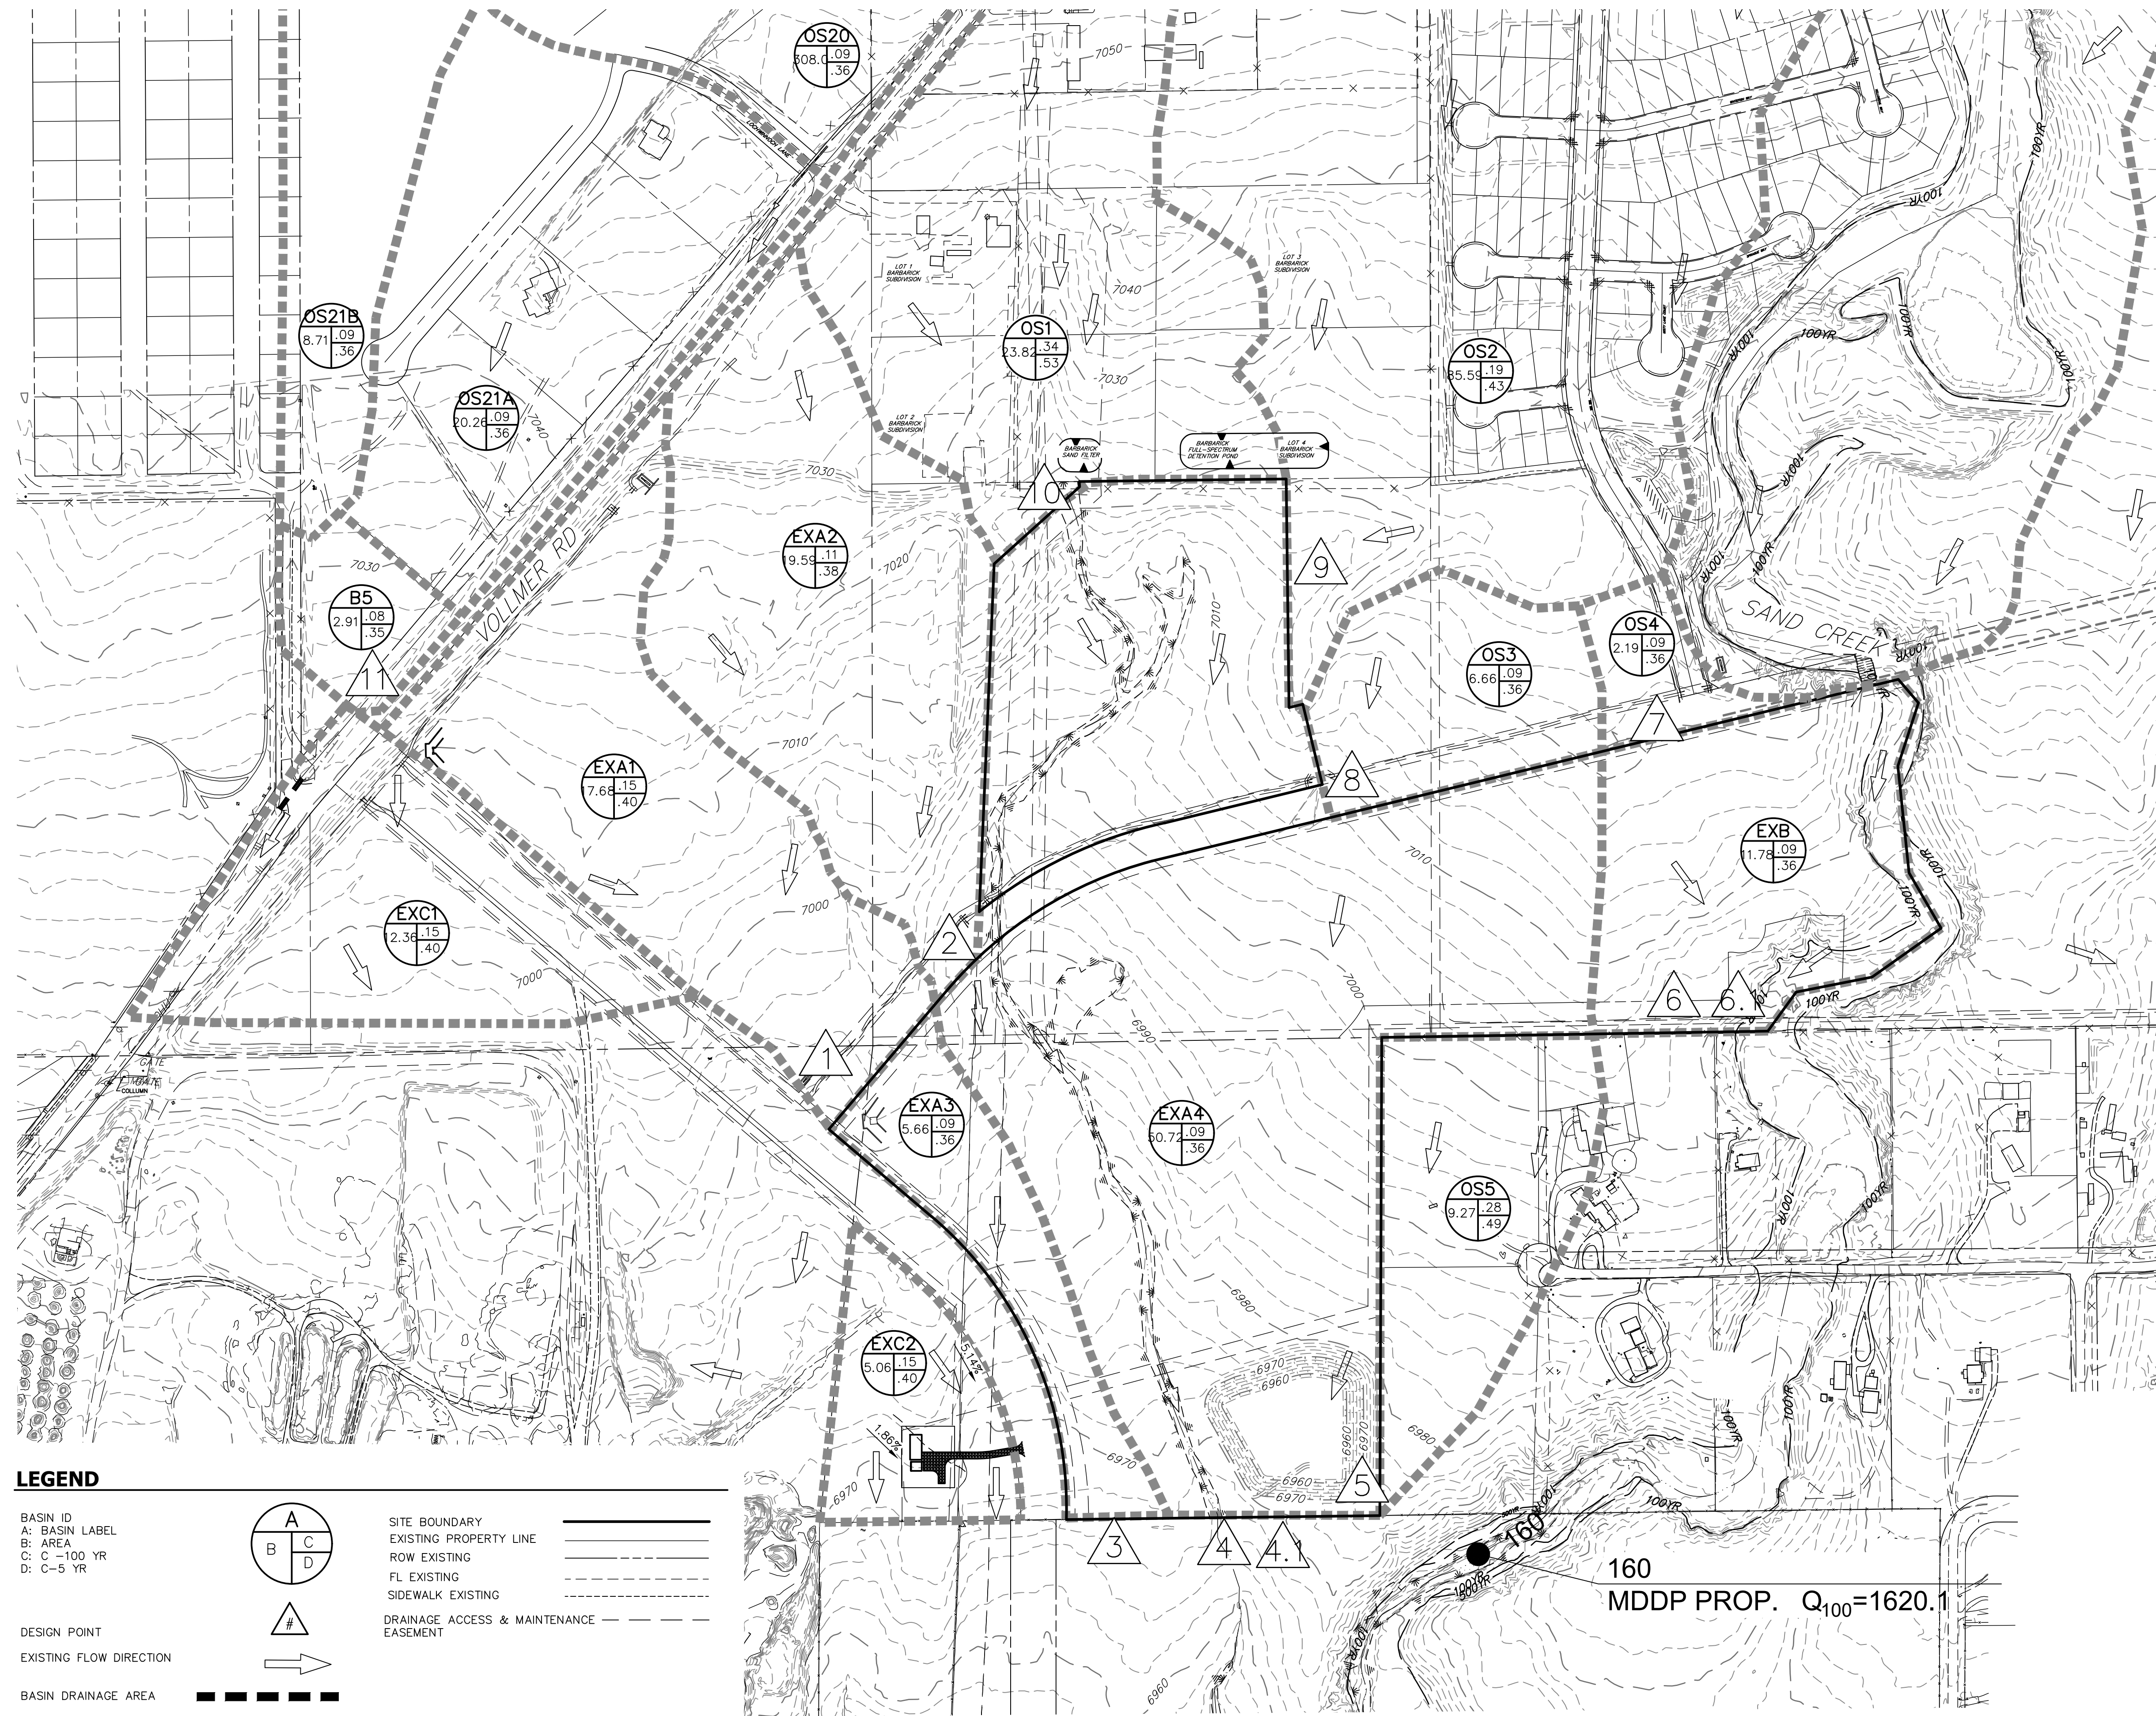


| DESIGN POINT |       |       |
|--------------|-------|-------|
| DP           | Q5    | Q100  |
|              | Total | Total |
| 1            | 7.2   | 12.1  |
| 2            | 5.4   | 9.0   |
| 3            | 1.4   | 2.3   |
| 4            | 10.6  | 17.8  |
| 5            | 7.5   | 23.4  |
| 6            | 3.0   | 5.0   |
| 7            | 0.5   | 0.9   |
| 8            | 1.8   | 3.1   |
| 9            | 37.3  | 62.6  |
| 10           | 23.9  | 40.1  |
| 4.1          | 45.6  | 76.5  |
| 6.1          | 3.0   | 5.1   |
| 11           | 56.9  | 215.3 |

| BASIN SUMMARY TABLE |              |                    |       |           |             |             |                 |
|---------------------|--------------|--------------------|-------|-----------|-------------|-------------|-----------------|
| Tributary Sub-basin | Area (acres) | Percent Impervious | $C_s$ | $C_{100}$ | $t_t$ (min) | $Q_5$ (cfs) | $Q_{100}$ (cfs) |
| EXA1                | 17.68        | 9%                 | 0.15  | 0.40      | 25.4        | 7.2         | 12.1            |
| EXA2                | 19.59        | 5%                 | 0.11  | 0.38      | 31.5        | 5.4         | 9.0             |
| EXA3                | 5.66         | 2%                 | 0.09  | 0.36      | 26.4        | 1.4         | 2.3             |
| EXA4                | 50.72        | 2%                 | 0.09  | 0.36      | 33.2        | 10.6        | 17.8            |
| EXC1                | 12.36        | 2%                 | 0.09  | 0.36      | 22.0        | 3.3         | 5.5             |
| EXC2                | 5.06         | 2%                 | 0.09  | 0.36      | 20.6        | 1.4         | 2.3             |
| EXB                 | 11.78        | 2%                 | 0.09  | 0.36      | 23.8        | 3.0         | 5.0             |
| OS1                 | 23.82        | 45%                | 0.34  | 0.53      | 22.4        | 23.9        | 40.1            |
| OS2                 | 85.59        | 18%                | 0.19  | 0.43      | 34.1        | 37.3        | 62.6            |
| OS3                 | 6.66         | 2%                 | 0.09  | 0.36      | 20.3        | 1.8         | 3.1             |
| OS4                 | 2.19         | 2%                 | 0.09  | 0.36      | 26.6        | 0.5         | 0.9             |
| OS5                 | 9.27         | 9%                 | 0.28  | 0.49      | 22.8        | 7.5         | 23.4            |
| B5                  | 2.91         | 26%                | 0.79  | 1.19      | 5.0         | 11.8        | 19.9            |
| OS20                | 308.00       | 9%                 | 0.13  | 0.40      | 68.9        | 61.0        | 310.0           |
| OS21A               | 20.26        | 12%                | 0.13  | 0.40      | 53.5        | 4.2         | 7.1             |
| OS21B               | 8.71         | 12%                | 0.13  | 0.40      | 24.5        | 3.1         | 5.3             |


### LEGEND

BASIN ID  
 A: BASIN LABEL  
 B: AREA  
 C: C -100 YR  
 D: C -5 YR





SITE BOUNDARY  
 EXISTING PROPERTY LINE  
 ROW EXISTING  
 FL EXISTING  
 SIDEWALK EXISTING  
 DRAINAGE ACCESS & MAINTENANCE EASEMENT

DESIGN POINT  
 EXISTING FLOW DIRECTION



BASIN DRAINAGE AREA  
 EXISTING CONTOURS

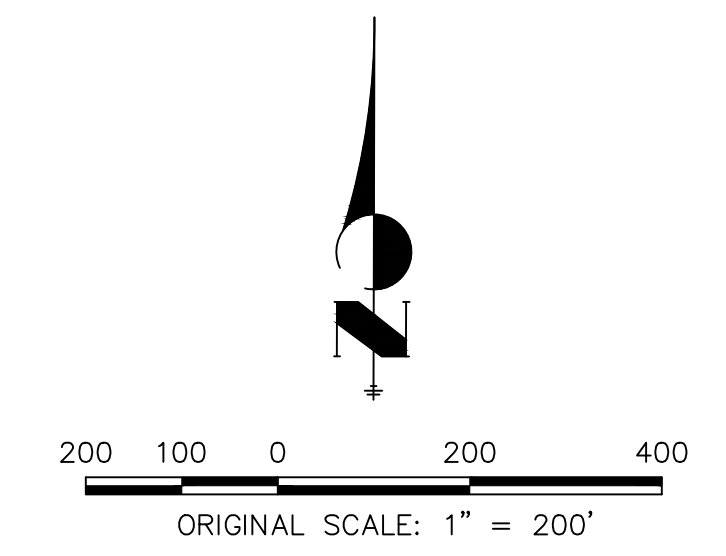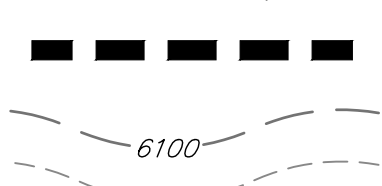

STERLING RANCH FILING 2  
 EXISTING DRAINAGE MAP  
 JOB NO. 25188.00  
 04/19/21  
 SHEET 1 OF 1



Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com





| DESIGN POINT | DP    | Q5    | Q100 | Total |
|--------------|-------|-------|------|-------|
| 1            | 4.4   | 9.4   |      |       |
| 2            | 1.9   | 3.9   |      |       |
| 3            | 11.1  | 24.7  |      |       |
| 4            | 3.7   | 7.4   |      |       |
| 5            | 4.1   | 10.6  |      |       |
| 6            | 3.3   | 6.7   |      |       |
| 7            | 27.5  | 60.6  |      |       |
| 8            | 3.0   | 12.5  |      |       |
| 9            | 1.9   | 4.8   |      |       |
| 10           | 9.2   | 17.3  |      |       |
| 11           | 9.5   | 19.9  |      |       |
| 12           | 1.9   | 9.5   |      |       |
| 13           | 15.7  | 34.6  |      |       |
| 14           | 16.0  | 37.9  |      |       |
| 15           | 5.4   | 11.7  |      |       |
| 16           | 4.4   | 9.5   |      |       |
| 17           | 1.4   | 4.7   |      |       |
| 18           | 4.3   | 14.0  |      |       |
| 19           | 38.8  | 85.4  |      |       |
| 20           | 7.1   | 13.4  |      |       |
| 21           | 7.4   | 15.2  |      |       |
| 22           | 2.7   | 15.4  |      |       |
| 23           | 8.8   | 15.8  |      |       |
| 24           | 11.5  | 20.6  |      |       |
| 25           | 61.0  | 310.9 |      |       |
| 26           | 4.2   | 21.9  |      |       |
| 27           | 6.3   | 11.7  |      |       |
| 28           | 6.9   | 14.4  |      |       |
| 29           | 3.1   | 16.3  |      |       |
| 30           | 0.9   | 6.4   |      |       |
| 31           | 2.0   | 15.0  |      |       |
| 32           | 1.4   | 10.0  |      |       |
| 33           | 6.0   | 10.3  |      |       |
| 34           | 12.6  | 19.7  |      |       |
| 35           | 17.6  | 28.7  |      |       |
| 36           | 25.9  | 46.9  |      |       |
| 37           | 5.0   | 8.7   |      |       |
| 38           | 52.5  | 103.9 |      |       |
| 39           | 55.1  | 103.9 |      |       |
| 40           | 56.4  | 107.7 |      |       |
| 41           | 17.3  | 25.3  |      |       |
| 42           | 68.8  | 125.0 |      |       |
| 43           | 23.2  | 74.5  |      |       |
| 44           | 36.1  | 106.6 |      |       |
| 45           | 56.9  | 138.7 |      |       |
| 46           | 9.6   | 17.2  |      |       |
| 47           | 63.7  | 133.9 |      |       |
| 48           | 96.6  | 250.7 |      |       |
| 49           | 97.8  | 250.4 |      |       |
| 50           | 192.0 | 396.8 |      |       |
| 51           | 189.8 | 424.4 |      |       |
| 52           | 14.2  | 22.5  |      |       |
| 53           | 189.8 | 424.4 |      |       |
| 54           | 187.5 | 428.2 |      |       |
| 55           | 18.4  | 26.1  |      |       |
| 56           | 50.2  | 204.7 |      |       |
| 57           | 12.7  | 26.0  |      |       |
| 58           | 49.1  | 203.3 |      |       |
| 59           | 3.1   | 3.1   |      |       |
| 60           | 51.1  | 51.1  |      |       |
| 61           | 56.5  | 76.1  |      |       |
| 62           | 58.4  | 248.6 |      |       |
| 63           | 59.8  | 320.3 |      |       |
| 64           | 13.8  | 28.1  |      |       |
| 65           | 17.6  | 48.3  |      |       |
| 66           | 3.31  | 6.50  |      |       |
| 67           | 1.63  | 2.97  |      |       |

| BASIN SUMMARY TABLE |         |              |      |      |                |                |                  |
|---------------------|---------|--------------|------|------|----------------|----------------|------------------|
| Tributary           | Area    | Percent      | Cs   | C100 | t <sub>c</sub> | Q <sub>s</sub> | Q <sub>100</sub> |
| Sub-basin           | (acres) | (Impervious) |      |      | (min)          | (cfs)          | (cfs)            |
| A1                  | 2.06    | 66%          | 0.51 | 0.65 | 9.7            | 4.4            | 9.4              |
| A2                  | 0.82    | 69%          | 0.53 | 0.66 | 9.1            | 1.9            | 3.9              |
| A3                  | 6.76    | 60%          | 0.47 | 0.62 | 15.0           | 11.1           | 24.7             |
| A4                  | 1.51    | 77%          | 0.60 | 0.71 | 10.2           | 3.7            | 7.4              |
| A5                  | 1.70    | 76%          | 0.59 | 0.70 | 9.9            | 4.1            | 8.3              |
| A6                  | 1.37    | 75%          | 0.58 | 0.70 | 10.0           | 3.3            | 6.6              |
| AGA                 | 0.53    | 95%          | 0.81 | 0.88 | 5.0            | 2.2            | 4.1              |
| A7                  | 19.00   | 65%          | 0.45 | 0.59 | 18.3           | 27.5           | 60.6             |
| A8                  | 1.48    | 63%          | 0.56 | 0.70 | 13.9           | 3.0            | 6.3              |
| A9                  | 0.61    | 79%          | 0.73 | 0.83 | 8.7            | 1.9            | 3.7              |
| A10                 | 2.61    | 86%          | 0.79 | 0.88 | 7.9            | 9.2            | 17.3             |
| A11                 | 2.89    | 83%          | 0.76 | 0.86 | 8.7            | 9.5            | 18.1             |
| A12                 | 3.87    | 8%           | 0.13 | 0.38 | 11.9           | 1.9            | 3.5              |
| A13                 | 9.65    | 65%          | 0.45 | 0.59 | 14.0           | 15.7           | 34.6             |
| A14                 | 11.76   | 55%          | 0.39 | 0.55 | 15.3           | 16.0           | 37.9             |
| A15                 | 2.91    | 54%          | 0.52 | 0.68 | 14.9           | 5.4            | 11.7             |
| A16                 | 2.34    | 56%          | 0.54 | 0.69 | 14.7           | 4.4            | 9.6              |
| A17                 | 1.76    | 24%          | 0.21 | 0.44 | 13.7           | 1.4            | 4.7              |
| A18                 | 5.27    | 21%          | 0.24 | 0.47 | 16.4           | 4.3            | 14.0             |
| A19                 | 31.85   | 67%          | 0.45 | 0.59 | 25.8           | 38.8           | 85.4             |
| A20                 | 1.83    | 89%          | 0.81 | 0.89 | 8.0            | 6.6            | 12.2             |
| A21                 | 1.93    | 90%          | 0.82 | 0.90 | 8.7            | 6.8            | 12.6             |
| A22                 | 8.68    | 5%           | 0.11 | 0.37 | 23.3           | 2.7            | 15.4             |
| B1                  | 2.98    | 100%         | 0.90 | 0.96 | 17.6           | 8.8            | 15.8             |
| B2                  | 3.89    | 100%         | 0.90 | 0.96 | 17.6           | 11.5           | 20.6             |
| B3                  | 1.53    | 100%         | 0.90 | 0.96 | 9.4            | 5.8            | 10.4             |
| B4                  | 1.50    | 100%         | 0.90 | 0.96 | 9.4            | 5.7            | 10.2             |
| B5                  | 2.91    | 5%           | 0.08 | 0.35 | 13.1           | 0.9            | 6.4              |
| C1                  | 8.01    | 95%          | 0.81 | 0.88 | 9.9            | 2.0            | 15.0             |
| C2                  | 5.06    | 95%          | 0.81 | 0.88 | 7.9            | 1.4            | 10.0             |
| OS20                | 308.00  | 9%           | 0.13 | 0.40 | 68.9           | 61.0           | 310.0            |
| OS21A               | 20.26   | 12%          | 0.13 | 0.40 | 53.5           | 4.2            | 21.9             |
| OS21B               | 8.71    | 12%          | 0.13 | 0.40 | 24.5           | 3.1            | 16.3             |
| OS2                 | 17.00   | 70%          | 0.49 | 0.62 | 36.0           | 13.8           | 39.1             |
| OS3                 | 28.70   | 70%          | 0.49 | 0.62 | 52.6           | 17.6           | 48.9             |
| OS4                 | 5.08    | 15%          | 0.20 | 0.40 | 29.5           | 2.6            | 8.5              |
| D1                  | 0.45    | 95%          | 0.81 | 0.88 | 7.0            | 1.7            | 3.1              |
| D2                  | 0.43    | 95%          | 0.81 | 0.88 | 7.0            | 1.6            | 3.0              |

- LEGEND:**
- PROPOSED STORM SEWER
  - 5000 FUTURE RD MAJOR CONTOUR
  - 5000 FUTURE RD MINOR CONTOUR
  - PROPOSED MAJOR CONTOUR
  - PROPOSED MINOR CONTOUR
  - 5000 EXISTING MAJOR CONTOUR
  - EXISTING MINOR CONTOUR
  - DRAINAGE BASIN
  - A  
○ B  
○ C  
○ D A = BASIN DESIGNATION  
B = AREA IN ACRES  
C = 5-YR RUNOFF COEFFICIENT  
D = 100-YR RUNOFF COEFFICIENT
  - ▲ DESIGN POINT
  - HP HIGH POINT
  - LP LOW POINT
  - DRAINAGE ARROW
  - ← EXISTING DRAINAGE ARROW
  - PROPOSED DRAINAGE SWALE

DRAINAGE MAP  
 STERLING RANCH FILING 2  
 JOB NO. 25188.01  
 6/23/21  
 SHEET 1 OF 7

**J-R ENGINEERING**  
 A Westrian Company



Centennial 303-740-9393 • Colorado Springs 719-593-2993  
 Fort Collins 970-491-9888 • www.jrengineering.com

RAO INVESTMENTS, LLC  
 5300000709




X:\25188\01\25188\01\Drawings\Sheet\Drainage\Map\Proposed Map.dwg, 24x36 Title Landscape, 6/23/2021, 3:58:24 PM, PC



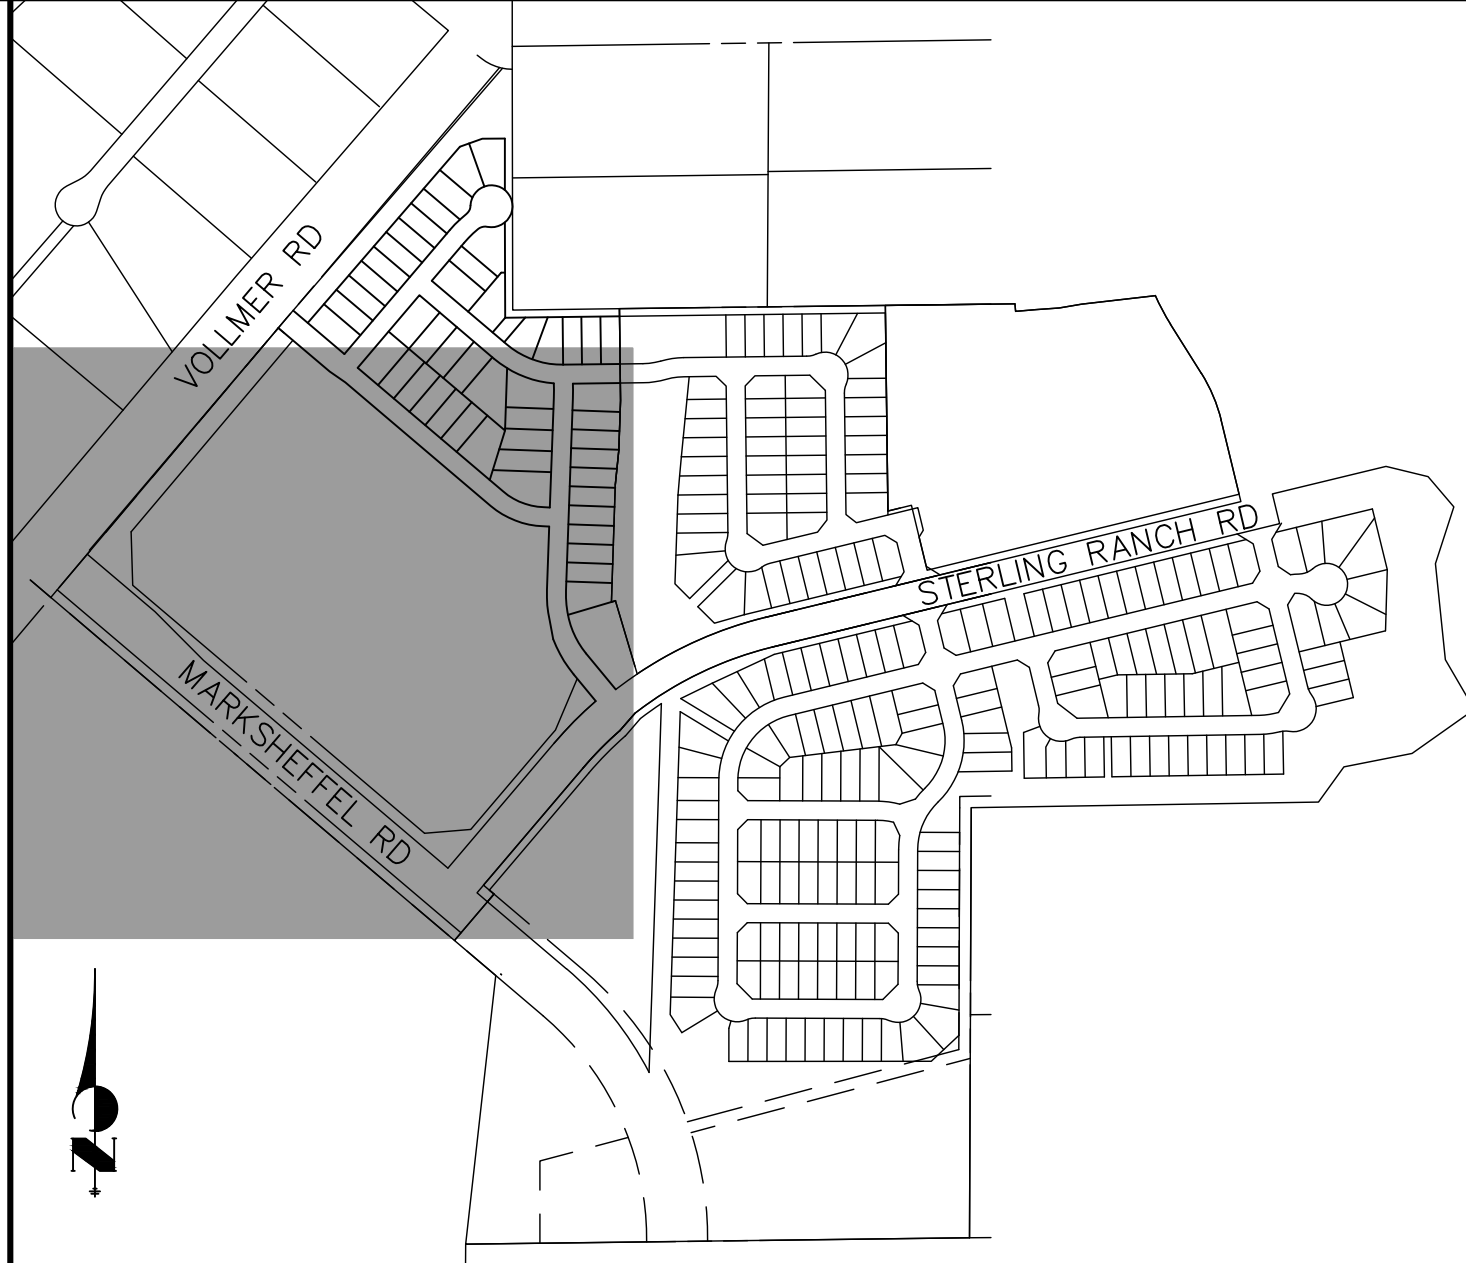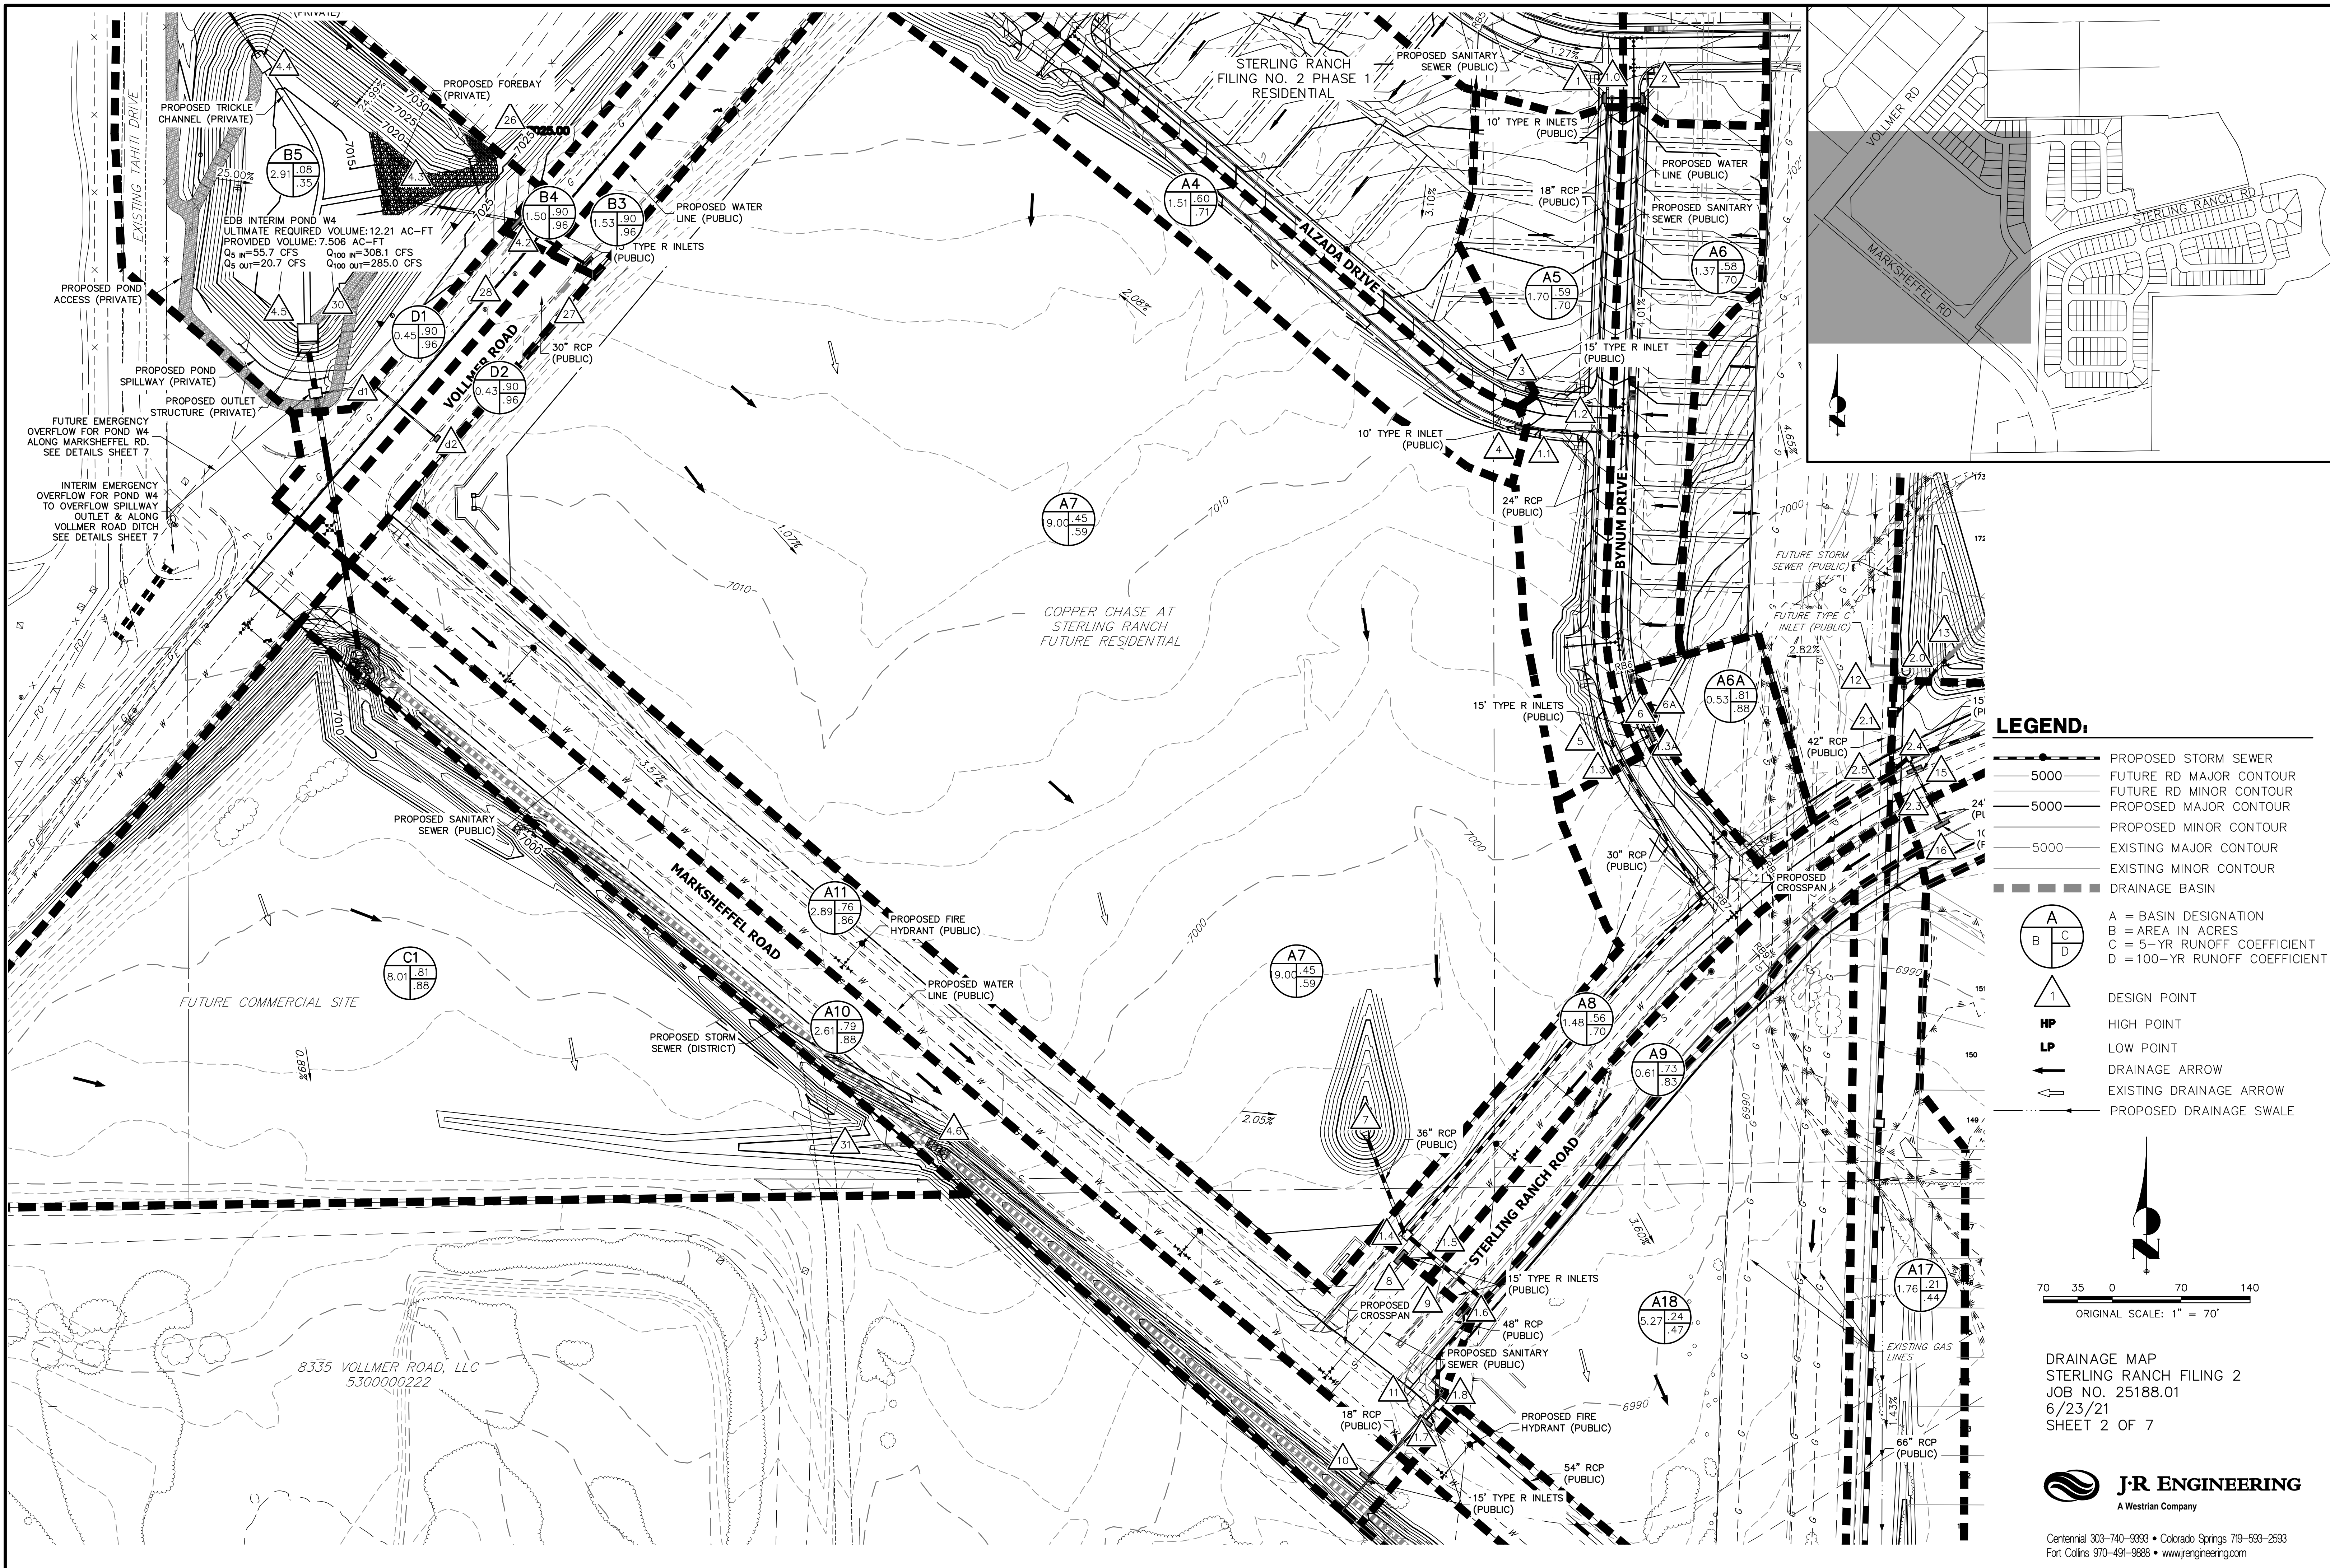

- LEGEND:**
- PROPOSED STORM SEWER
  - FUTURE RD MAJOR CONTOUR
  - FUTURE RD MINOR CONTOUR
  - PROPOSED MAJOR CONTOUR
  - PROPOSED MINOR CONTOUR
  - EXISTING MAJOR CONTOUR
  - EXISTING MINOR CONTOUR
  - DRAINAGE BASIN
  - A = BASIN DESIGNATION  
B = AREA IN ACRES  
C = 5-YR RUNOFF COEFFICIENT  
D = 100-YR RUNOFF COEFFICIENT
  - DESIGN POINT
  - HIGH POINT
  - LOW POINT
  - DRAINAGE ARROW
  - EXISTING DRAINAGE ARROW
  - PROPOSED DRAINAGE SWALE

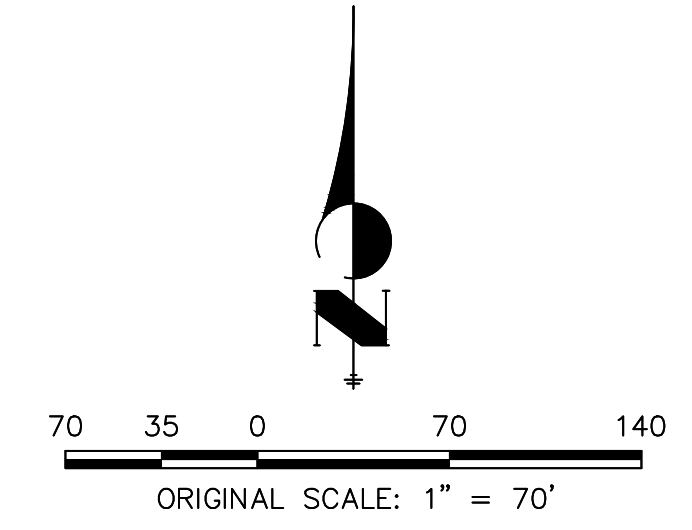


DRAINAGE MAP  
 STERLING RANCH FILING 2  
 JOB NO. 25188.01  
 6/23/21  
 SHEET 2 OF 7

**J-R ENGINEERING**  
 A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com

X:\25188\000\all\25188\01\Drawings\Sheet\Design\Damage Maps\Proposed Map.dwg, 24x36 Title Landscape (2), 6/23/2021, 3:08:15 PM, FC



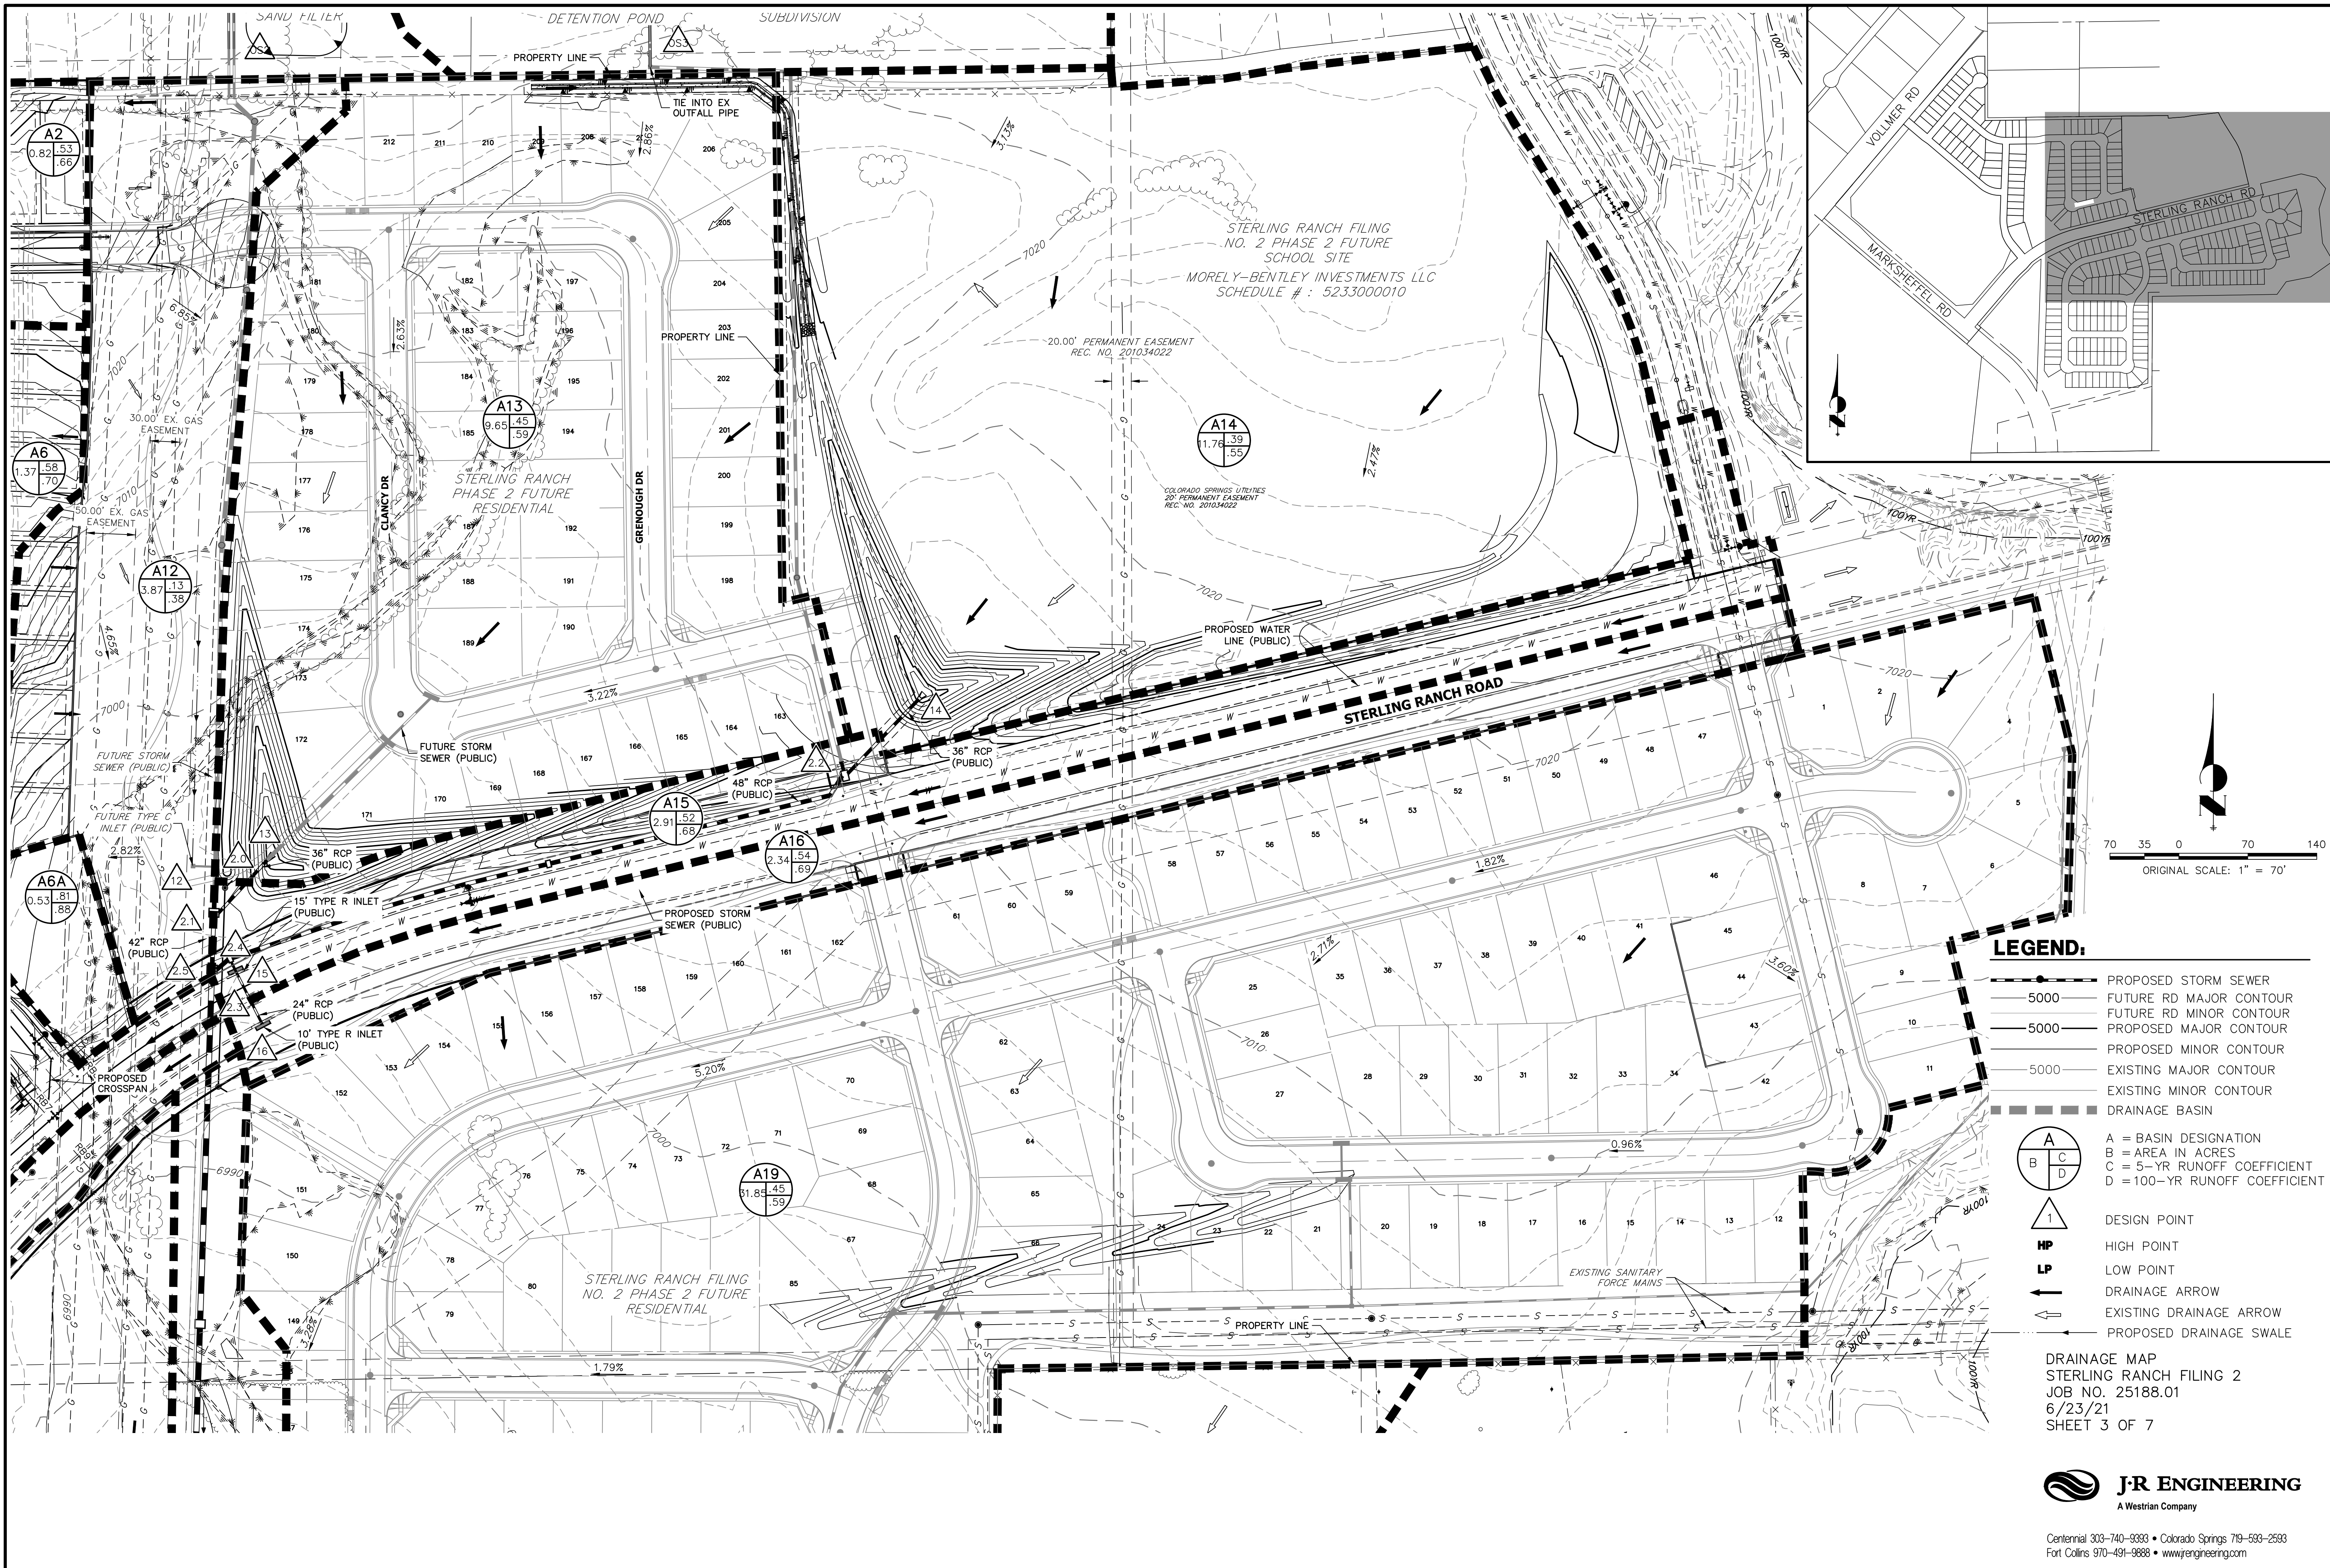

- LEGEND:**
- PROPOSED STORM SEWER
  - 5000 FUTURE RD MAJOR CONTOUR
  - 5000 FUTURE RD MINOR CONTOUR
  - 5000 PROPOSED MAJOR CONTOUR
  - 5000 PROPOSED MINOR CONTOUR
  - 5000 EXISTING MAJOR CONTOUR
  - 5000 EXISTING MINOR CONTOUR
  - DRAINAGE BASIN
  - A = BASIN DESIGNATION  
B = AREA IN ACRES  
C = 5-YR RUNOFF COEFFICIENT  
D = 100-YR RUNOFF COEFFICIENT
  - DESIGN POINT
  - HIGH POINT
  - LOW POINT
  - DRAINAGE ARROW
  - EXISTING DRAINAGE ARROW
  - PROPOSED DRAINAGE SWALE



DRAINAGE MAP  
 STERLING RANCH FILING 2  
 JOB NO. 25188.01  
 6/23/21  
 SHEET 3 OF 7




Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com

X:\25188\000\all\25188\01\Drawings\Sheet\Drawings\Sheet\Damage Maps\Proposed Map.dwg, 24x36 Title Landscape A1, 6/23/2021, 3:09:29 PM, FC



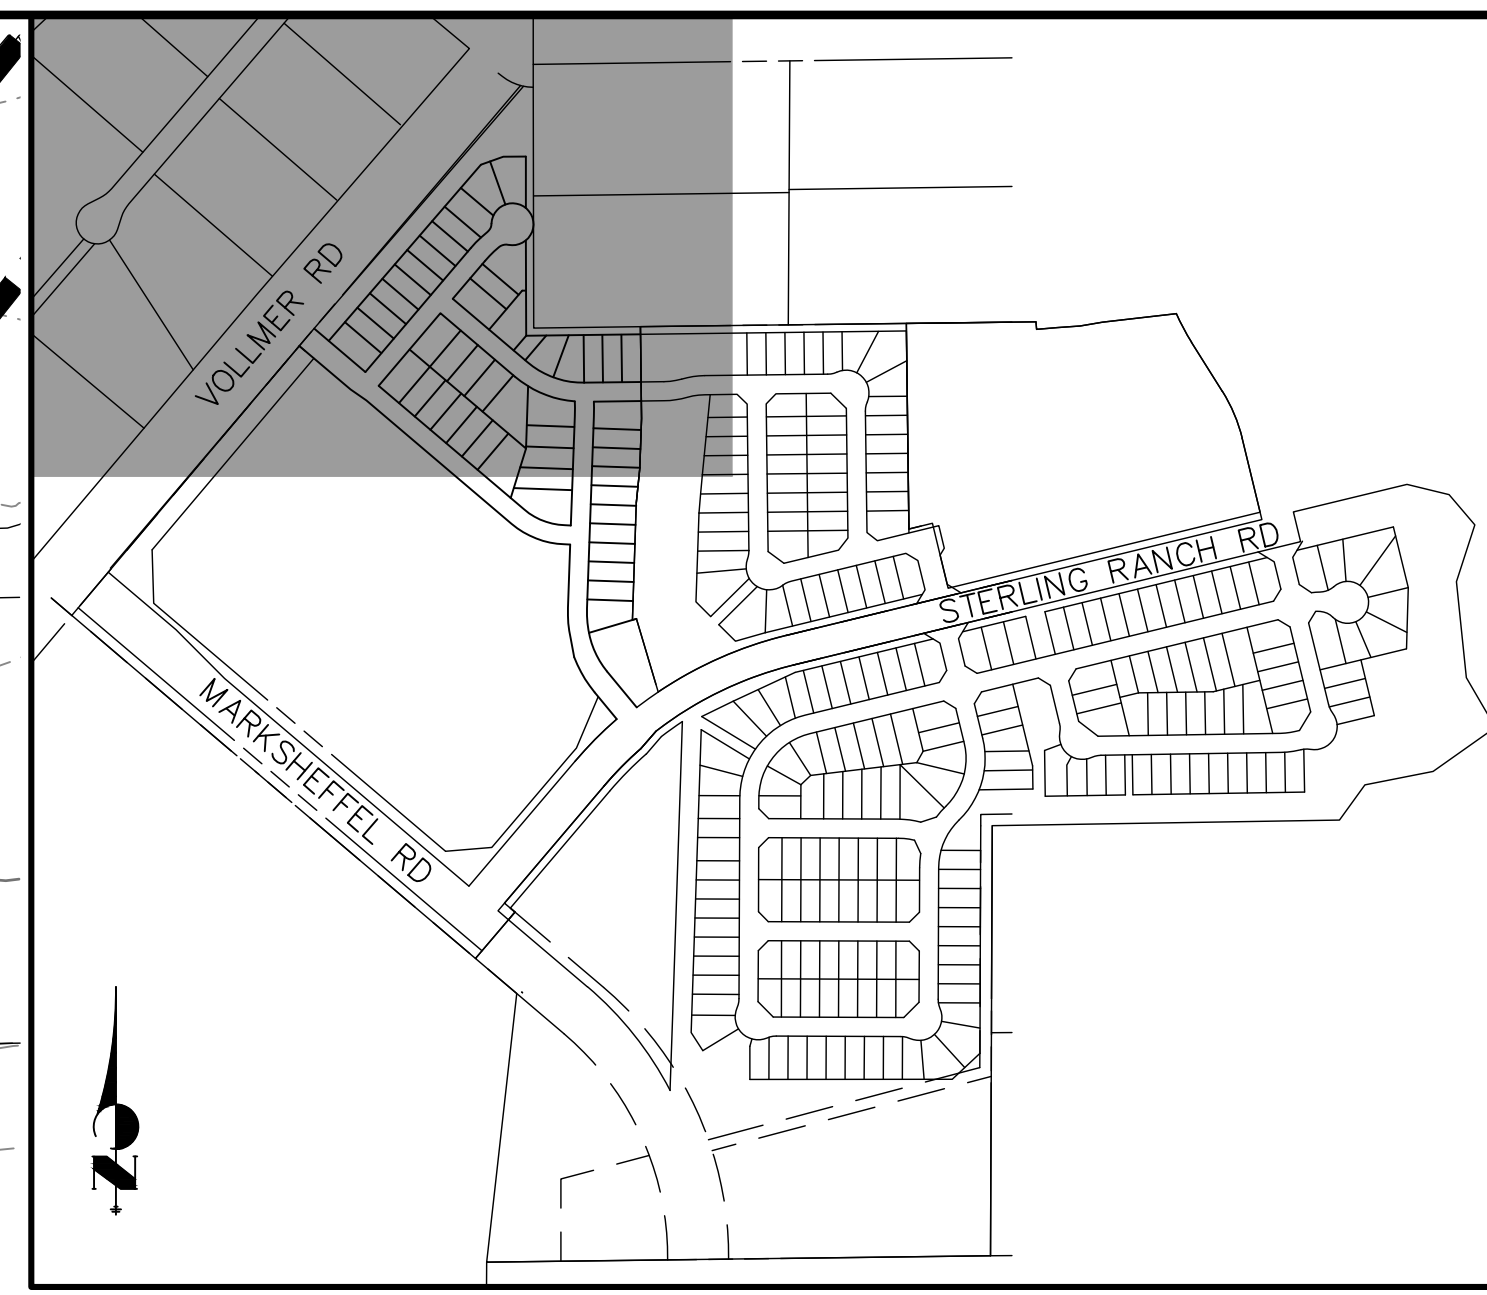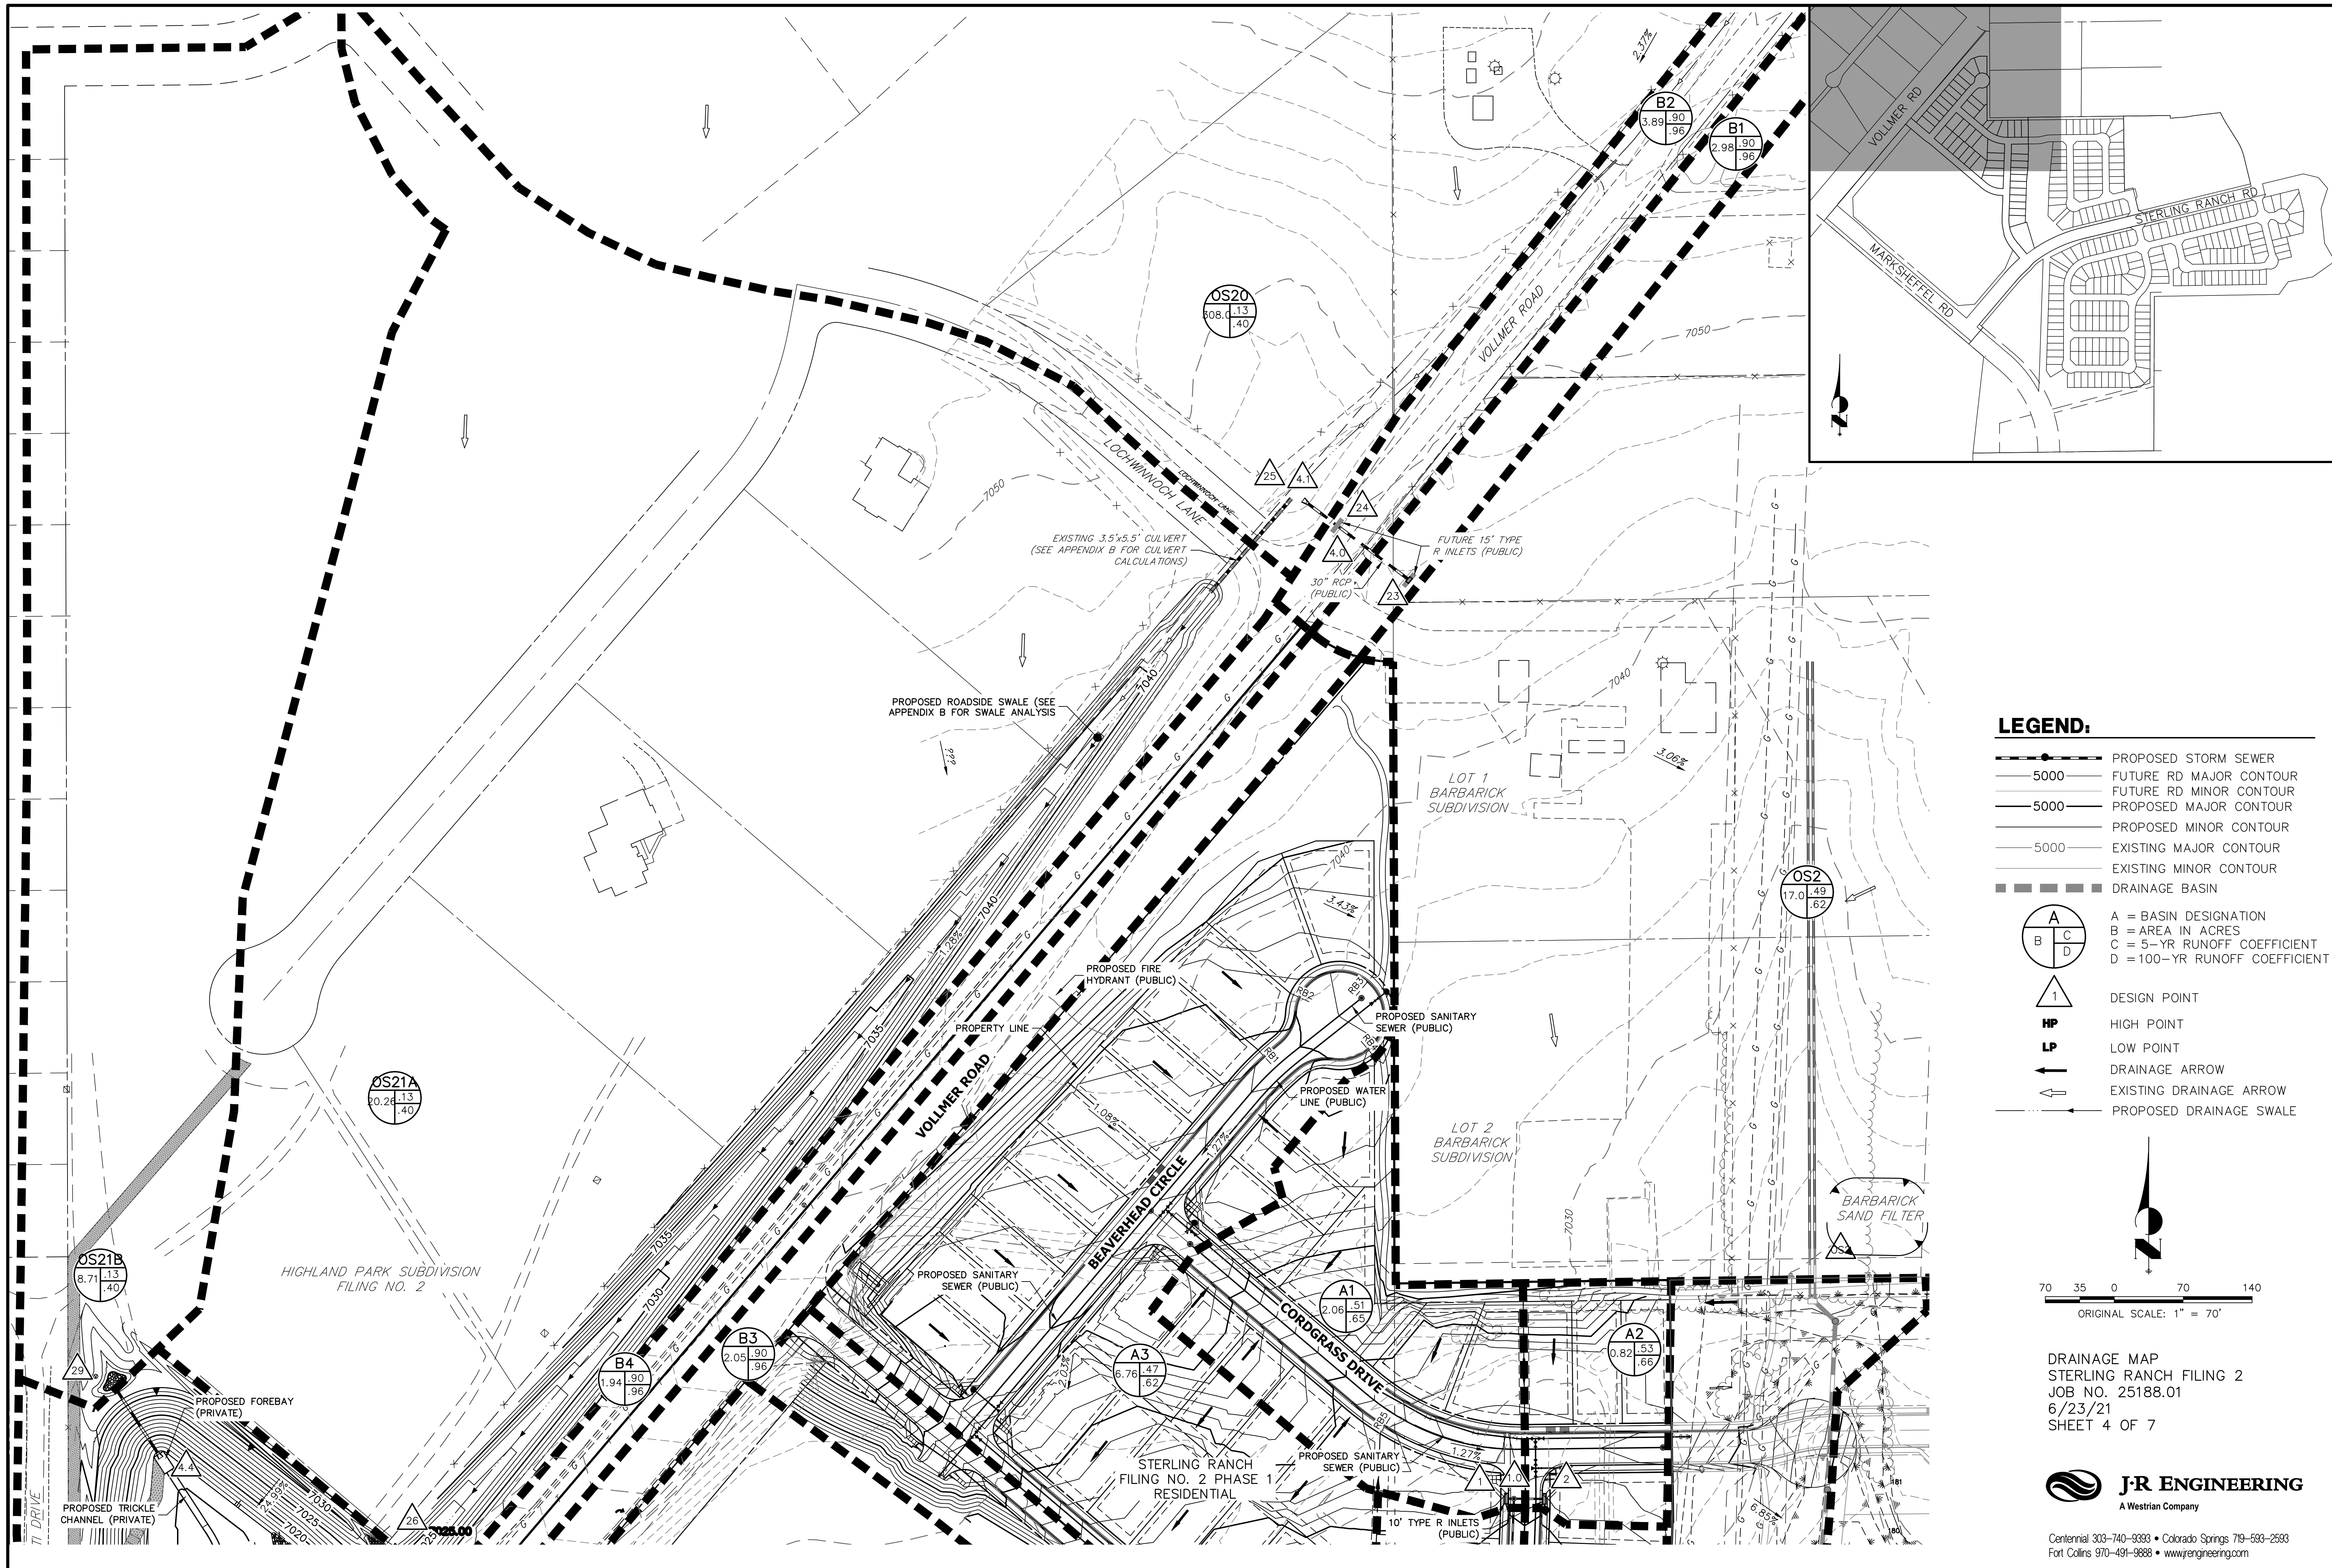



- LEGEND:**
- PROPOSED STORM SEWER
  - 5000 FUTURE RD MAJOR CONTOUR
  - 5000 FUTURE RD MINOR CONTOUR
  - PROPOSED MAJOR CONTOUR
  - 5000 PROPOSED MINOR CONTOUR
  - 5000 EXISTING MAJOR CONTOUR
  - 5000 EXISTING MINOR CONTOUR
  - DRAINAGE BASIN
- |  |                               |
|--|-------------------------------|
|  | A = BASIN DESIGNATION         |
|  | B = AREA IN ACRES             |
|  | C = 5-YR RUNOFF COEFFICIENT   |
|  | D = 100-YR RUNOFF COEFFICIENT |
- DESIGN POINT
  - HIGH POINT
  - LOW POINT
  - DRAINAGE ARROW
  - EXISTING DRAINAGE ARROW
  - PROPOSED DRAINAGE SWALE

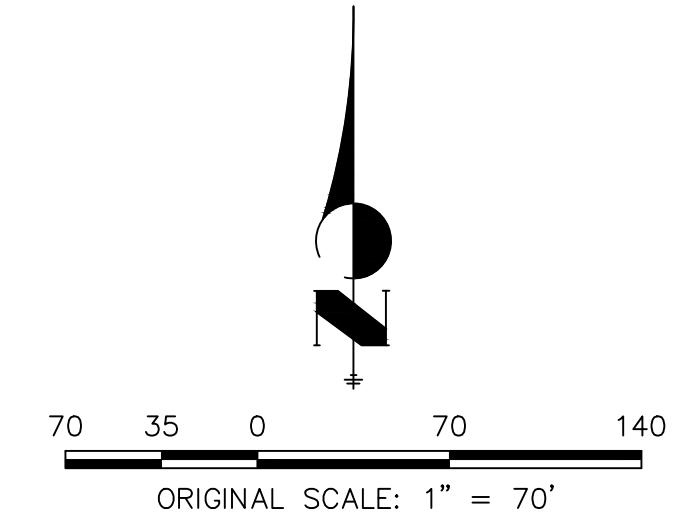


DRAINAGE MAP  
 STERLING RANCH FILING 2  
 JOB NO. 25188.01  
 6/23/21  
 SHEET 4 OF 7

X:\25188\01\Drawings\Sheet\Drainage Maps\Proposed Map.dwg, 24x36 Title Landscape (3), 6/23/2021, 3:16:42 PM, FC



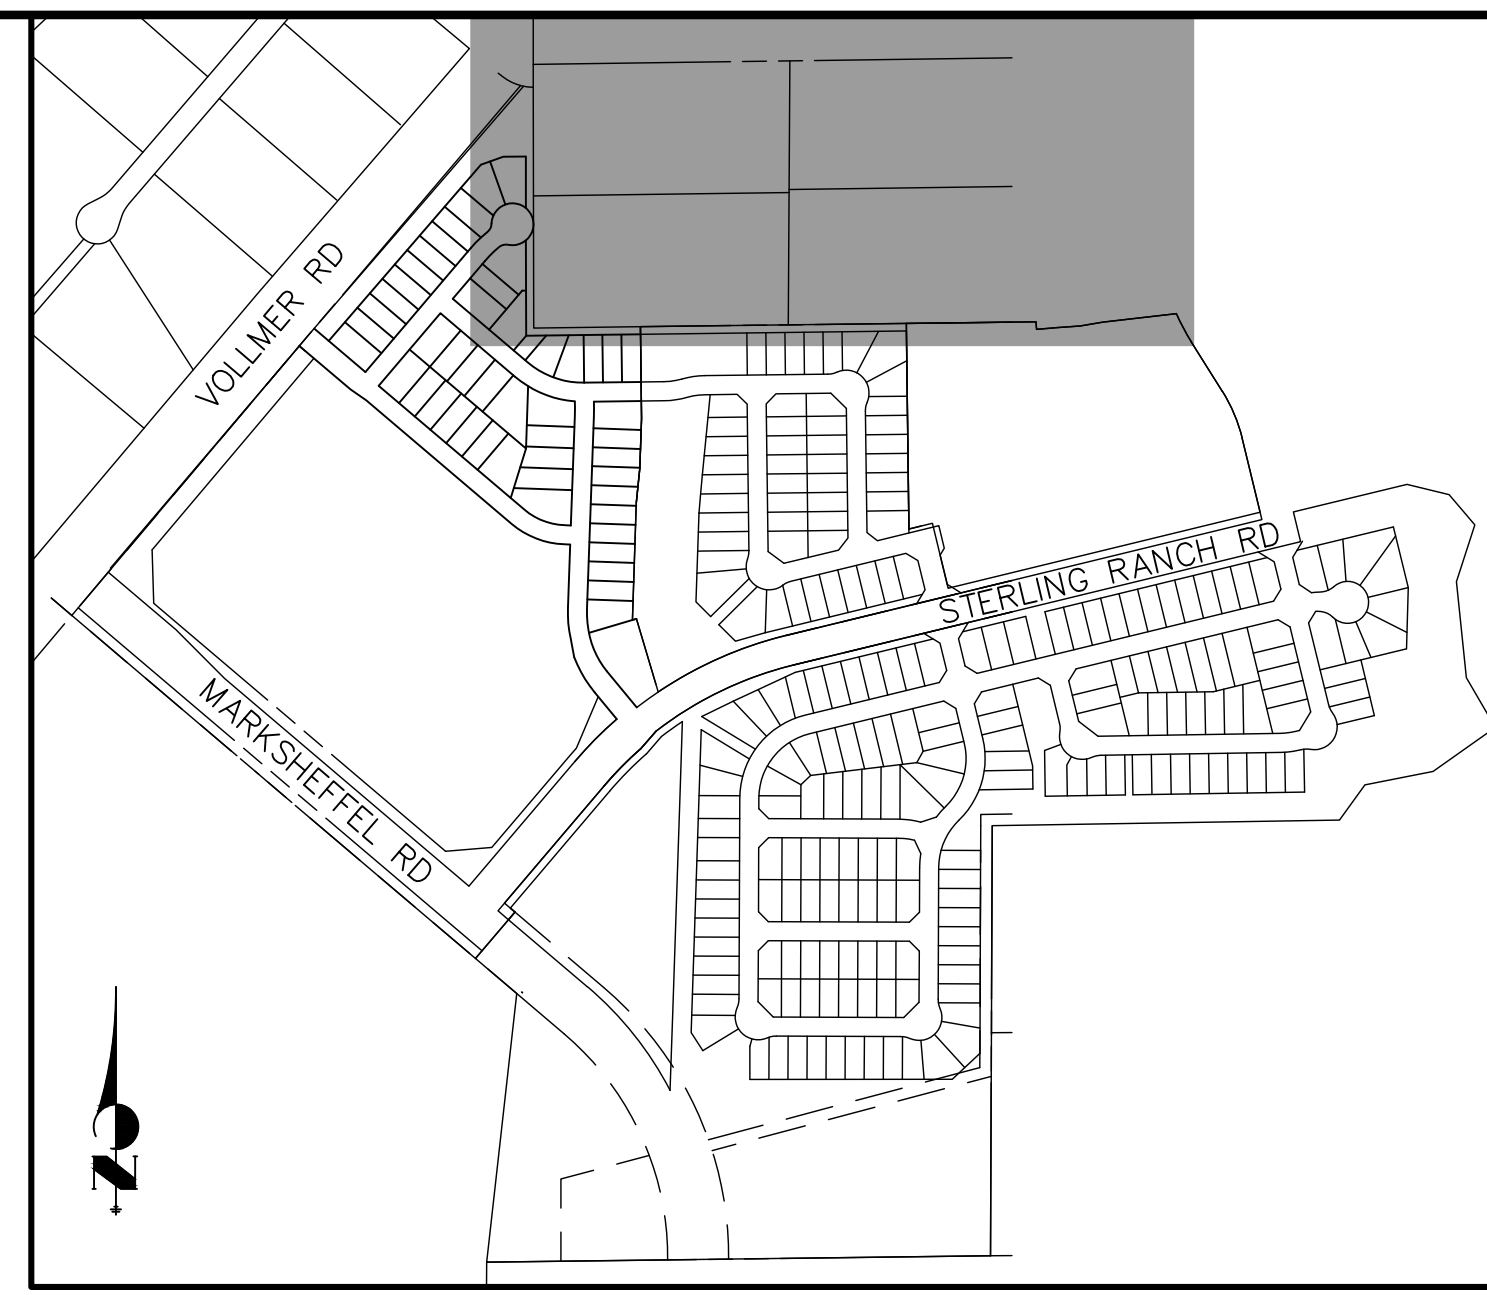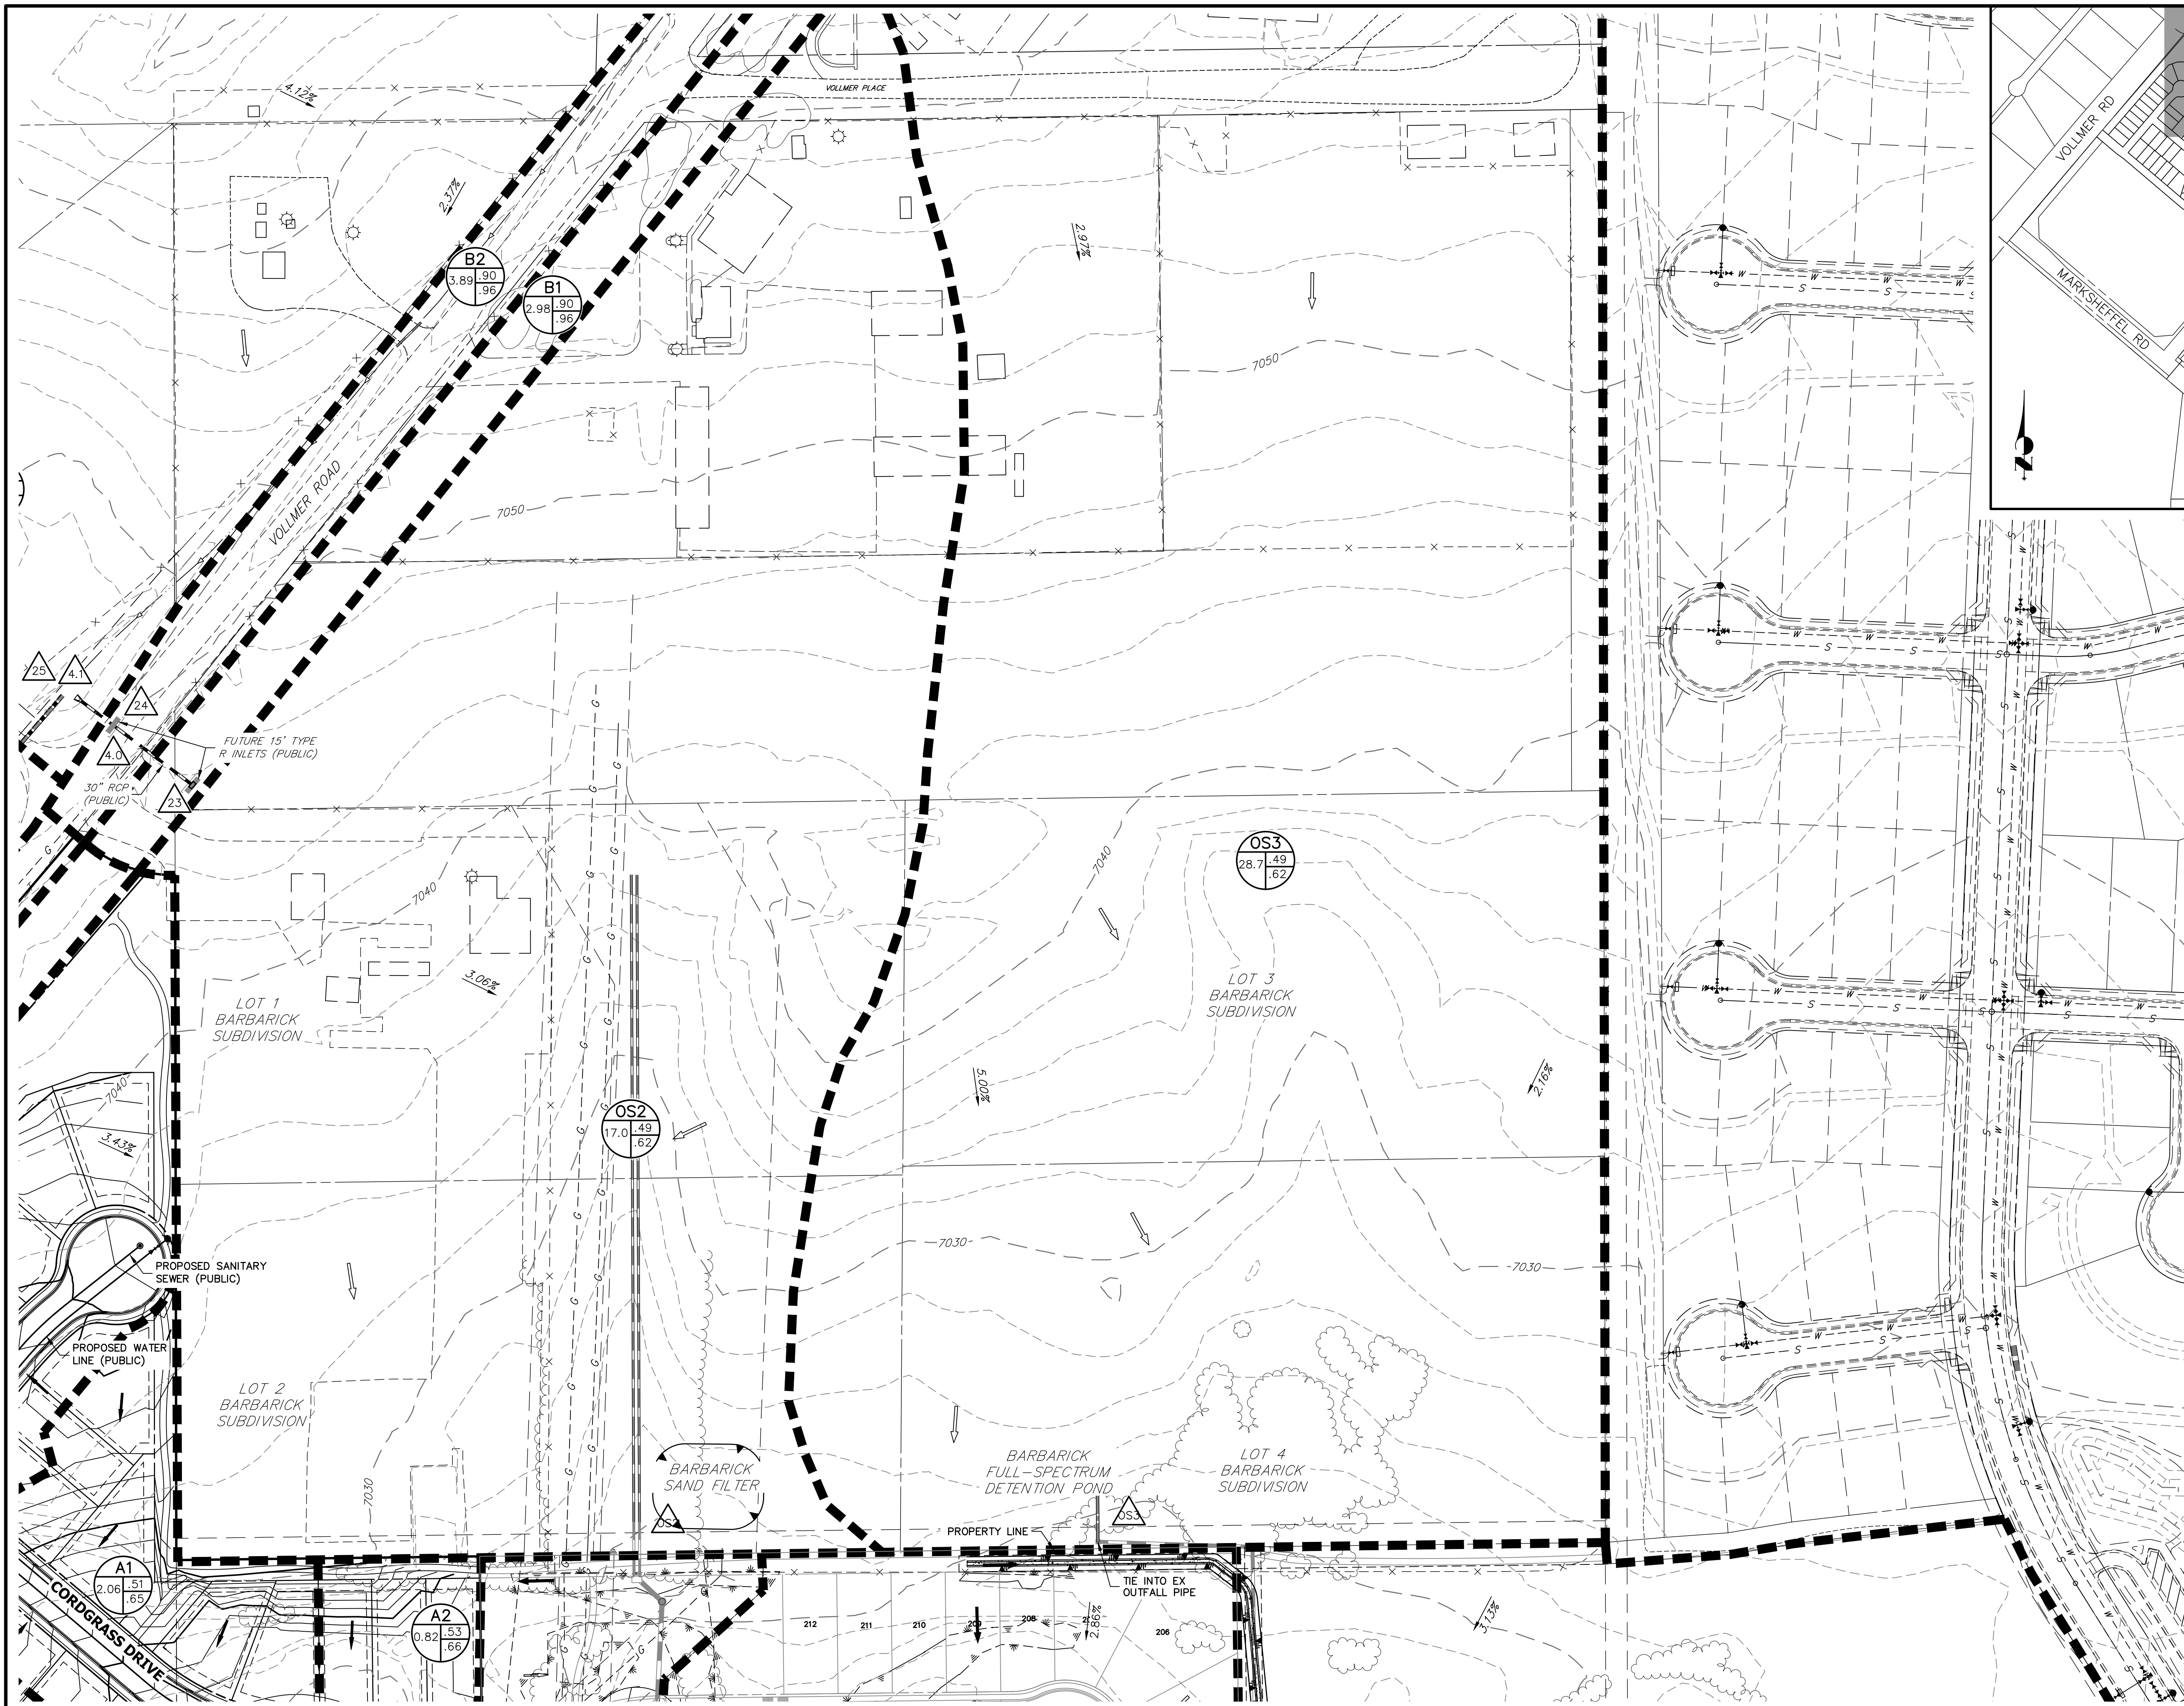

- LEGEND:**
- PROPOSED STORM SEWER
  - FUTURE RD MAJOR CONTOUR
  - FUTURE RD MINOR CONTOUR
  - PROPOSED MAJOR CONTOUR
  - PROPOSED MINOR CONTOUR
  - EXISTING MAJOR CONTOUR
  - EXISTING MINOR CONTOUR
  - DRAINAGE BASIN
  - A = BASIN DESIGNATION  
B = AREA IN ACRES  
C = 5-YR RUNOFF COEFFICIENT  
D = 100-YR RUNOFF COEFFICIENT
  - DESIGN POINT
  - HIGH POINT
  - LOW POINT
  - DRAINAGE ARROW
  - EXISTING DRAINAGE ARROW
  - PROPOSED DRAINAGE SWALE

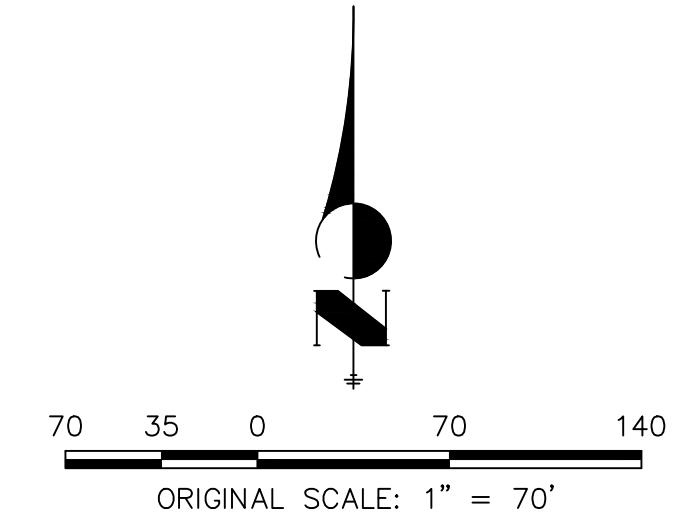


DRAINAGE MAP  
 STERLING RANCH FILING 2  
 JOB NO. 25188.01  
 6/23/21  
 SHEET 5 OF 7




Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com


X:\25188\000\all\25188\01\Drawings\Sheet\Drainage Maps\Proposed Map.dwg, 24x36 Title Landscape (6), 6/23/2021, 3:11:35 PM, PC

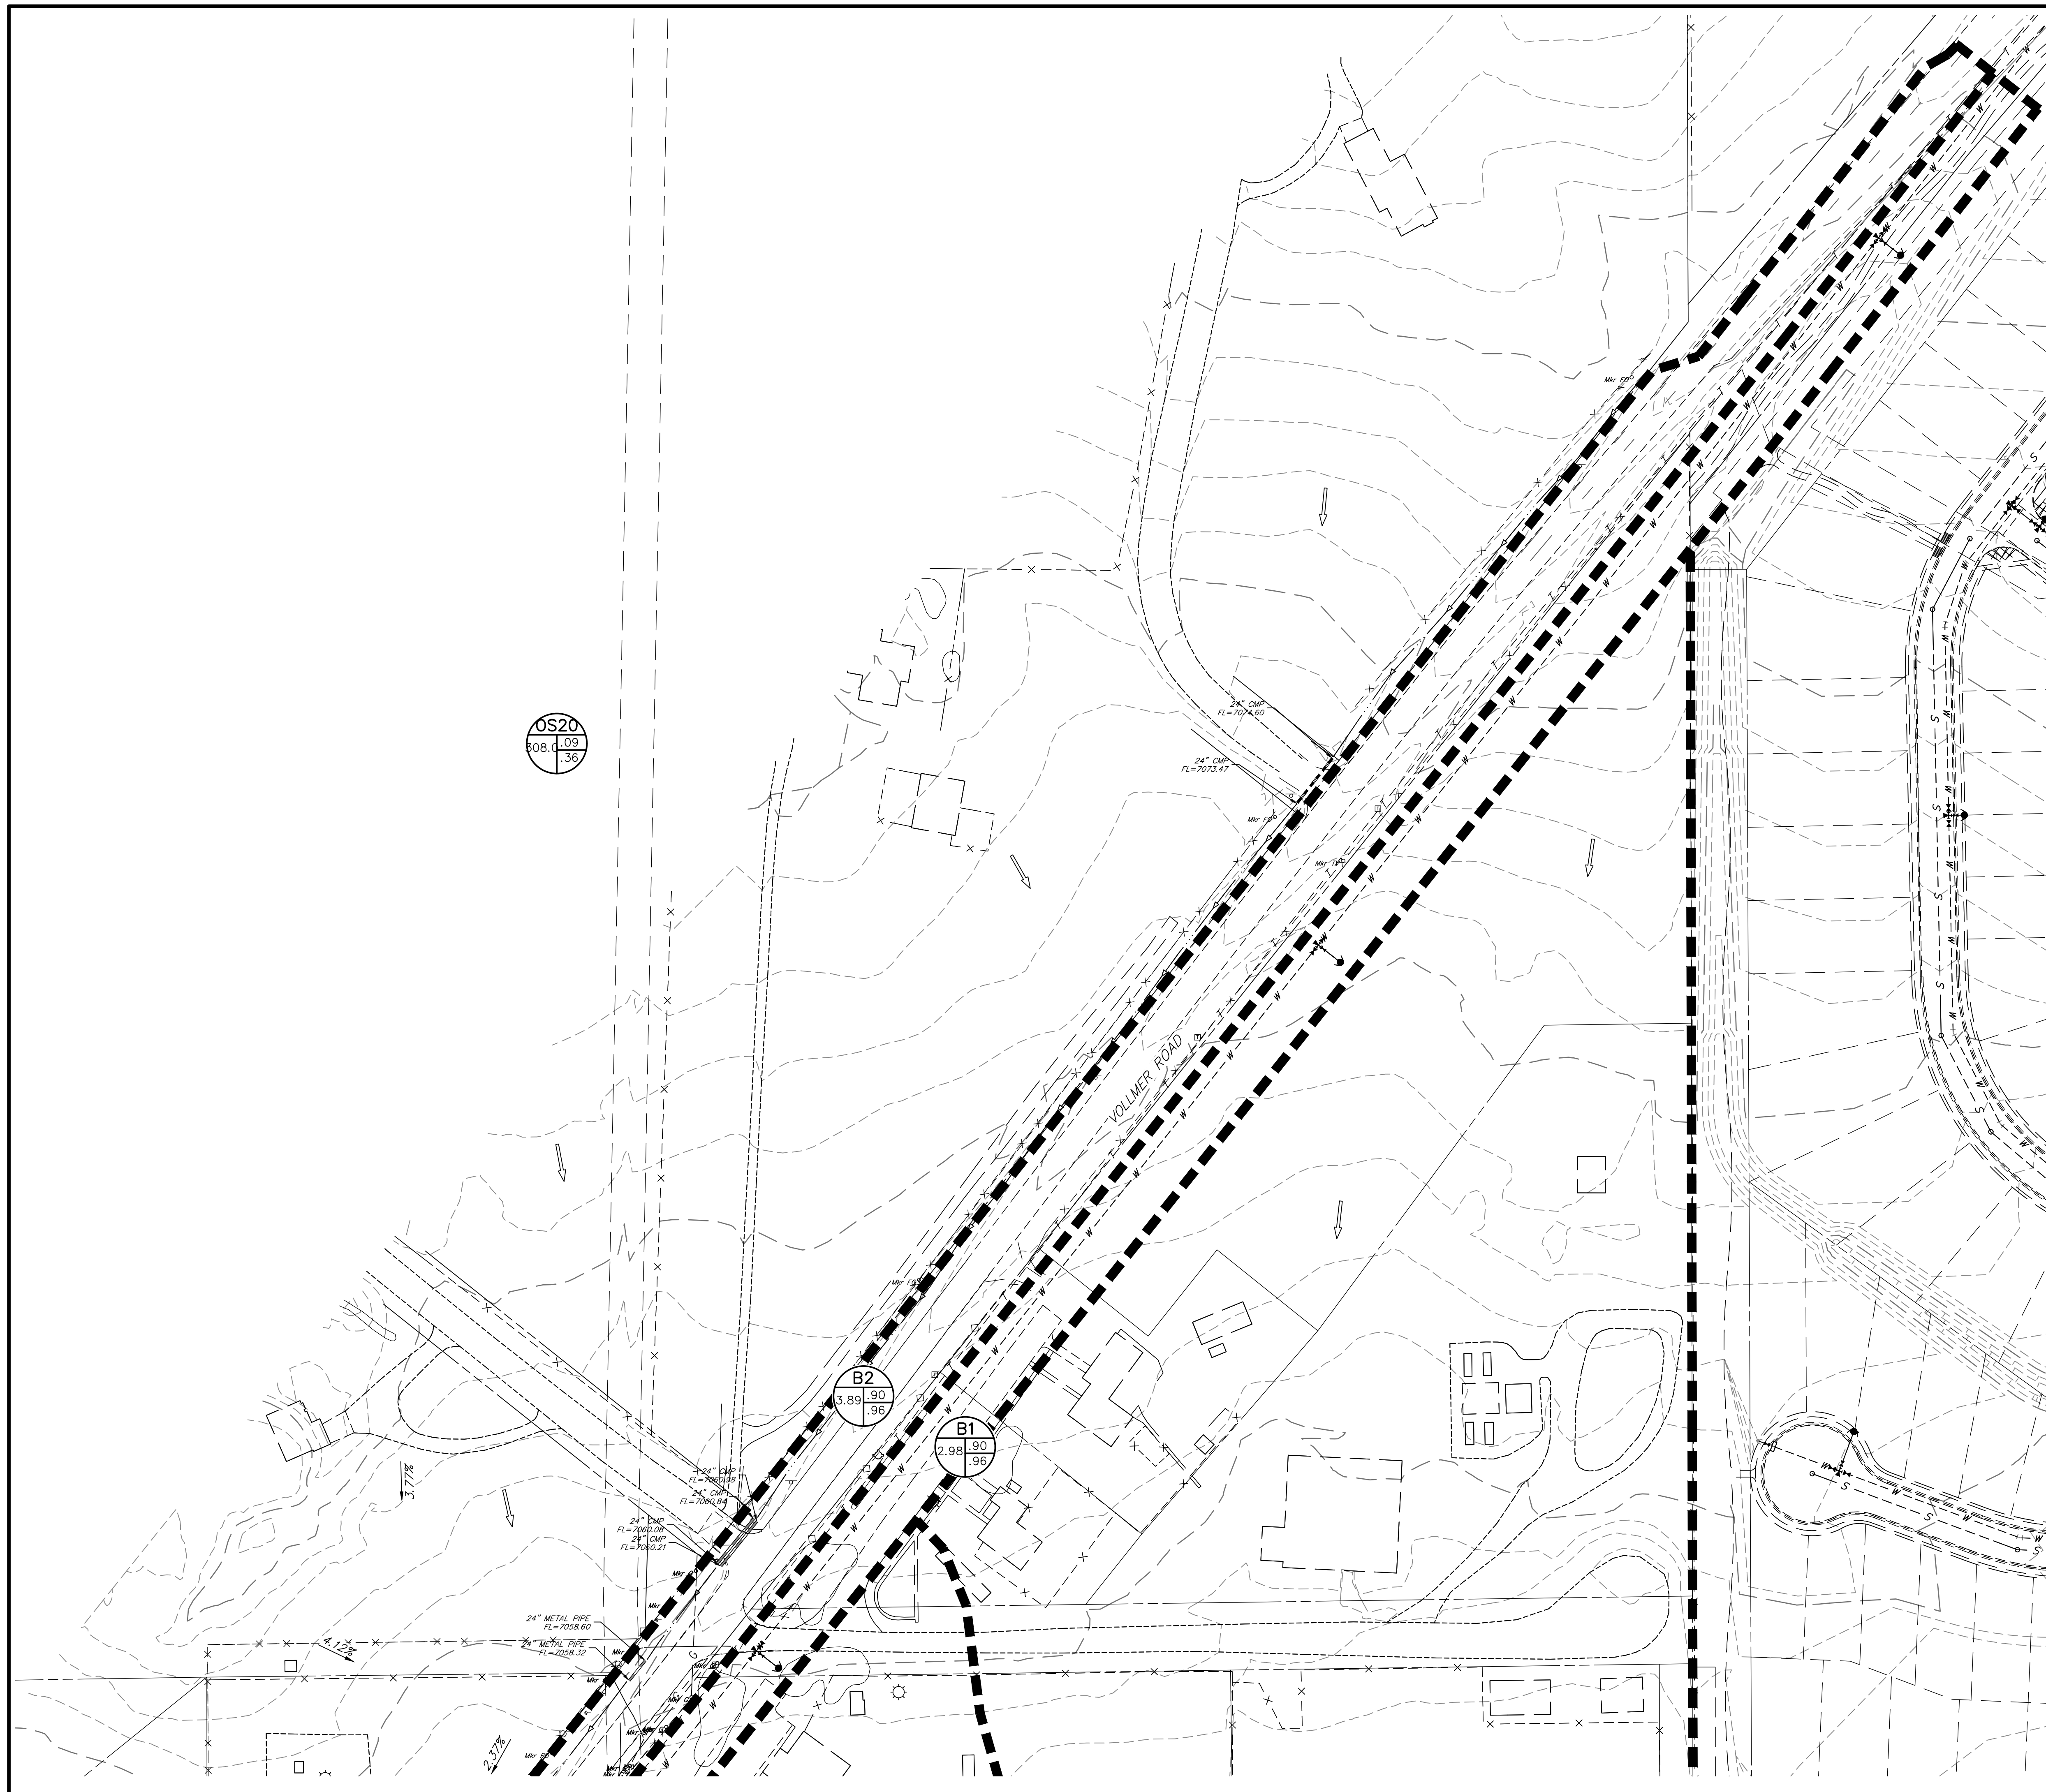

OS20  
108.09  
1.36

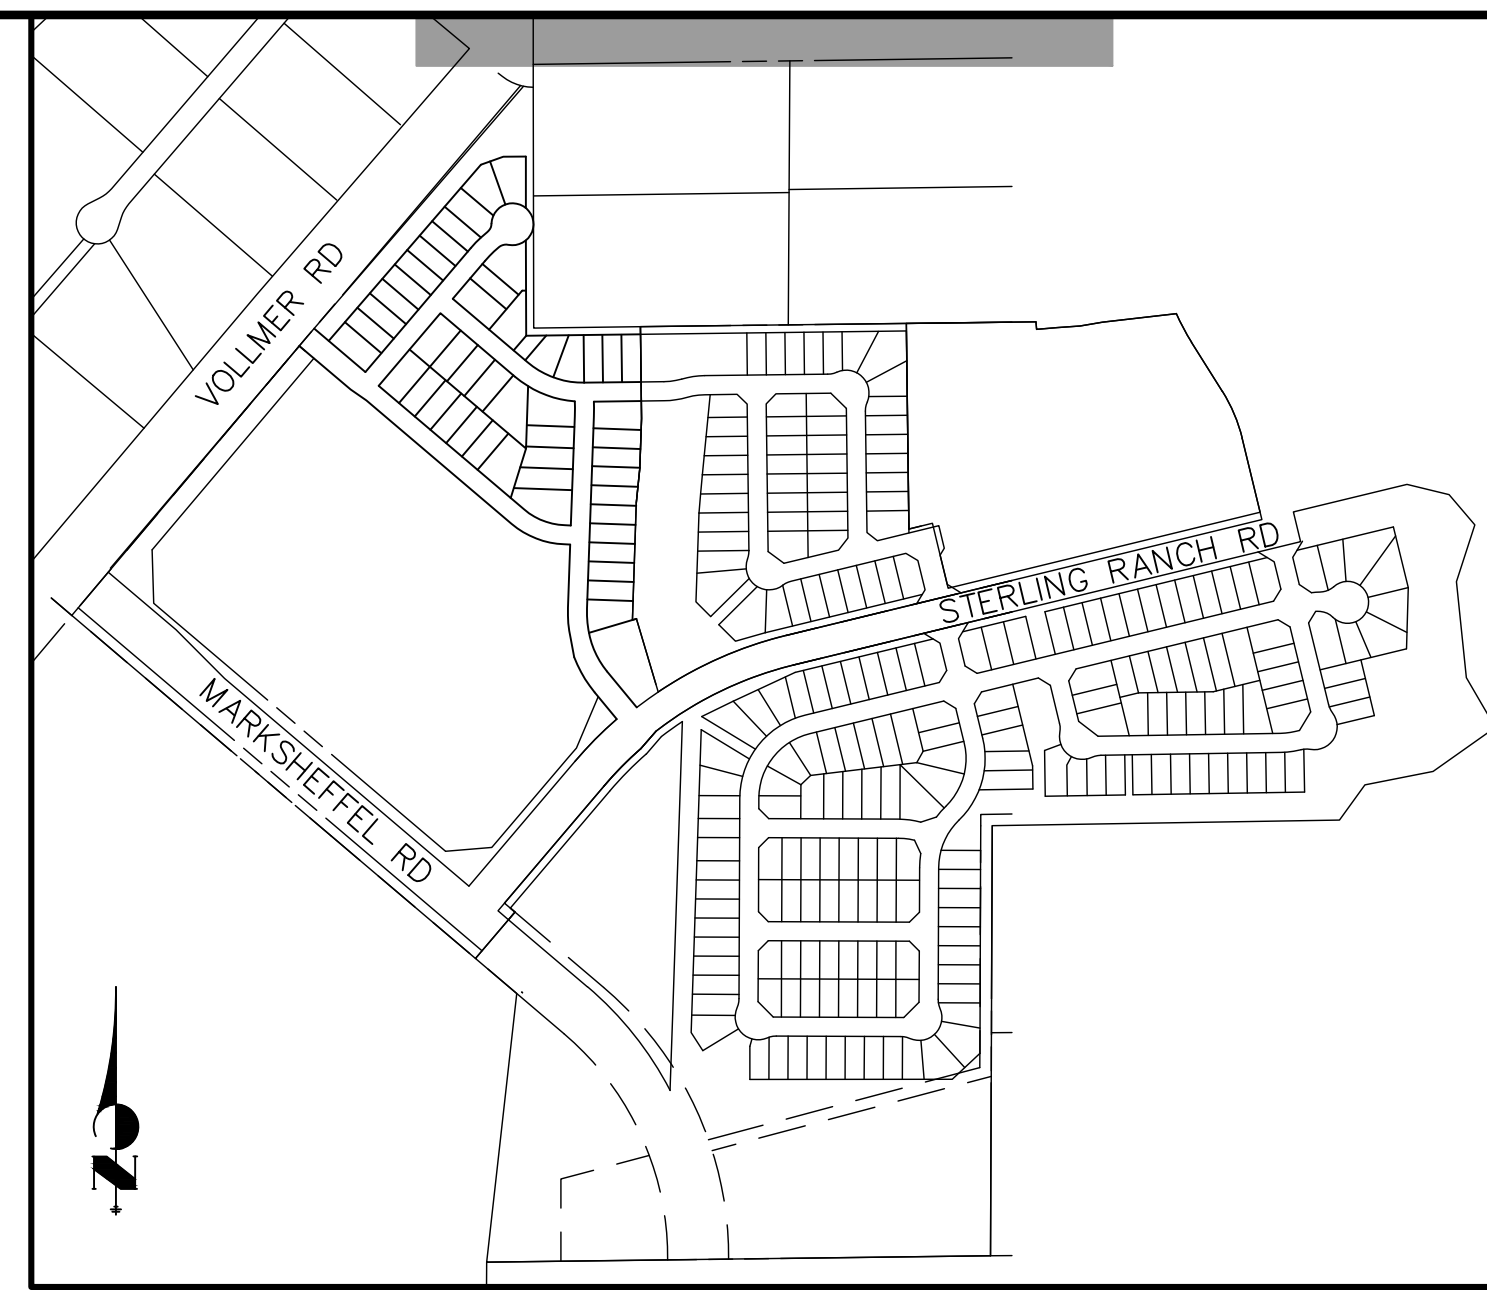

- LEGEND:**
- PROPOSED STORM SEWER
  - 5000 FUTURE RD MAJOR CONTOUR
  - 5000 FUTURE RD MINOR CONTOUR
  - 5000 PROPOSED MAJOR CONTOUR
  - 5000 PROPOSED MINOR CONTOUR
  - 5000 EXISTING MAJOR CONTOUR
  - EXISTING MINOR CONTOUR
  - DRAINAGE BASIN
  - A = BASIN DESIGNATION  
B = AREA IN ACRES  
C = 5-YR RUNOFF COEFFICIENT  
D = 100-YR RUNOFF COEFFICIENT
  - DESIGN POINT
  - HIGH POINT
  - LOW POINT
  - DRAINAGE ARROW
  - EXISTING DRAINAGE ARROW
  - PROPOSED DRAINAGE SWALE

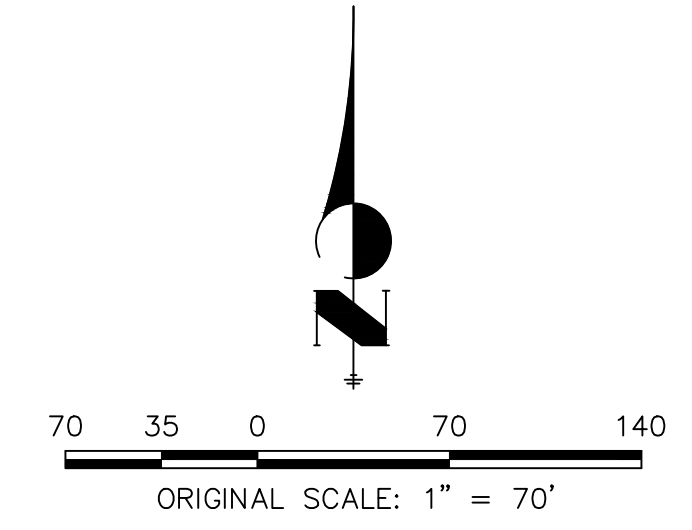


DRAINAGE MAP  
STERLING RANCH FILING 2  
JOB NO. 25188.01  
4/16/21  
SHEET 6 OF 6




Centennial 303-740-9393 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • www.jrengineering.com




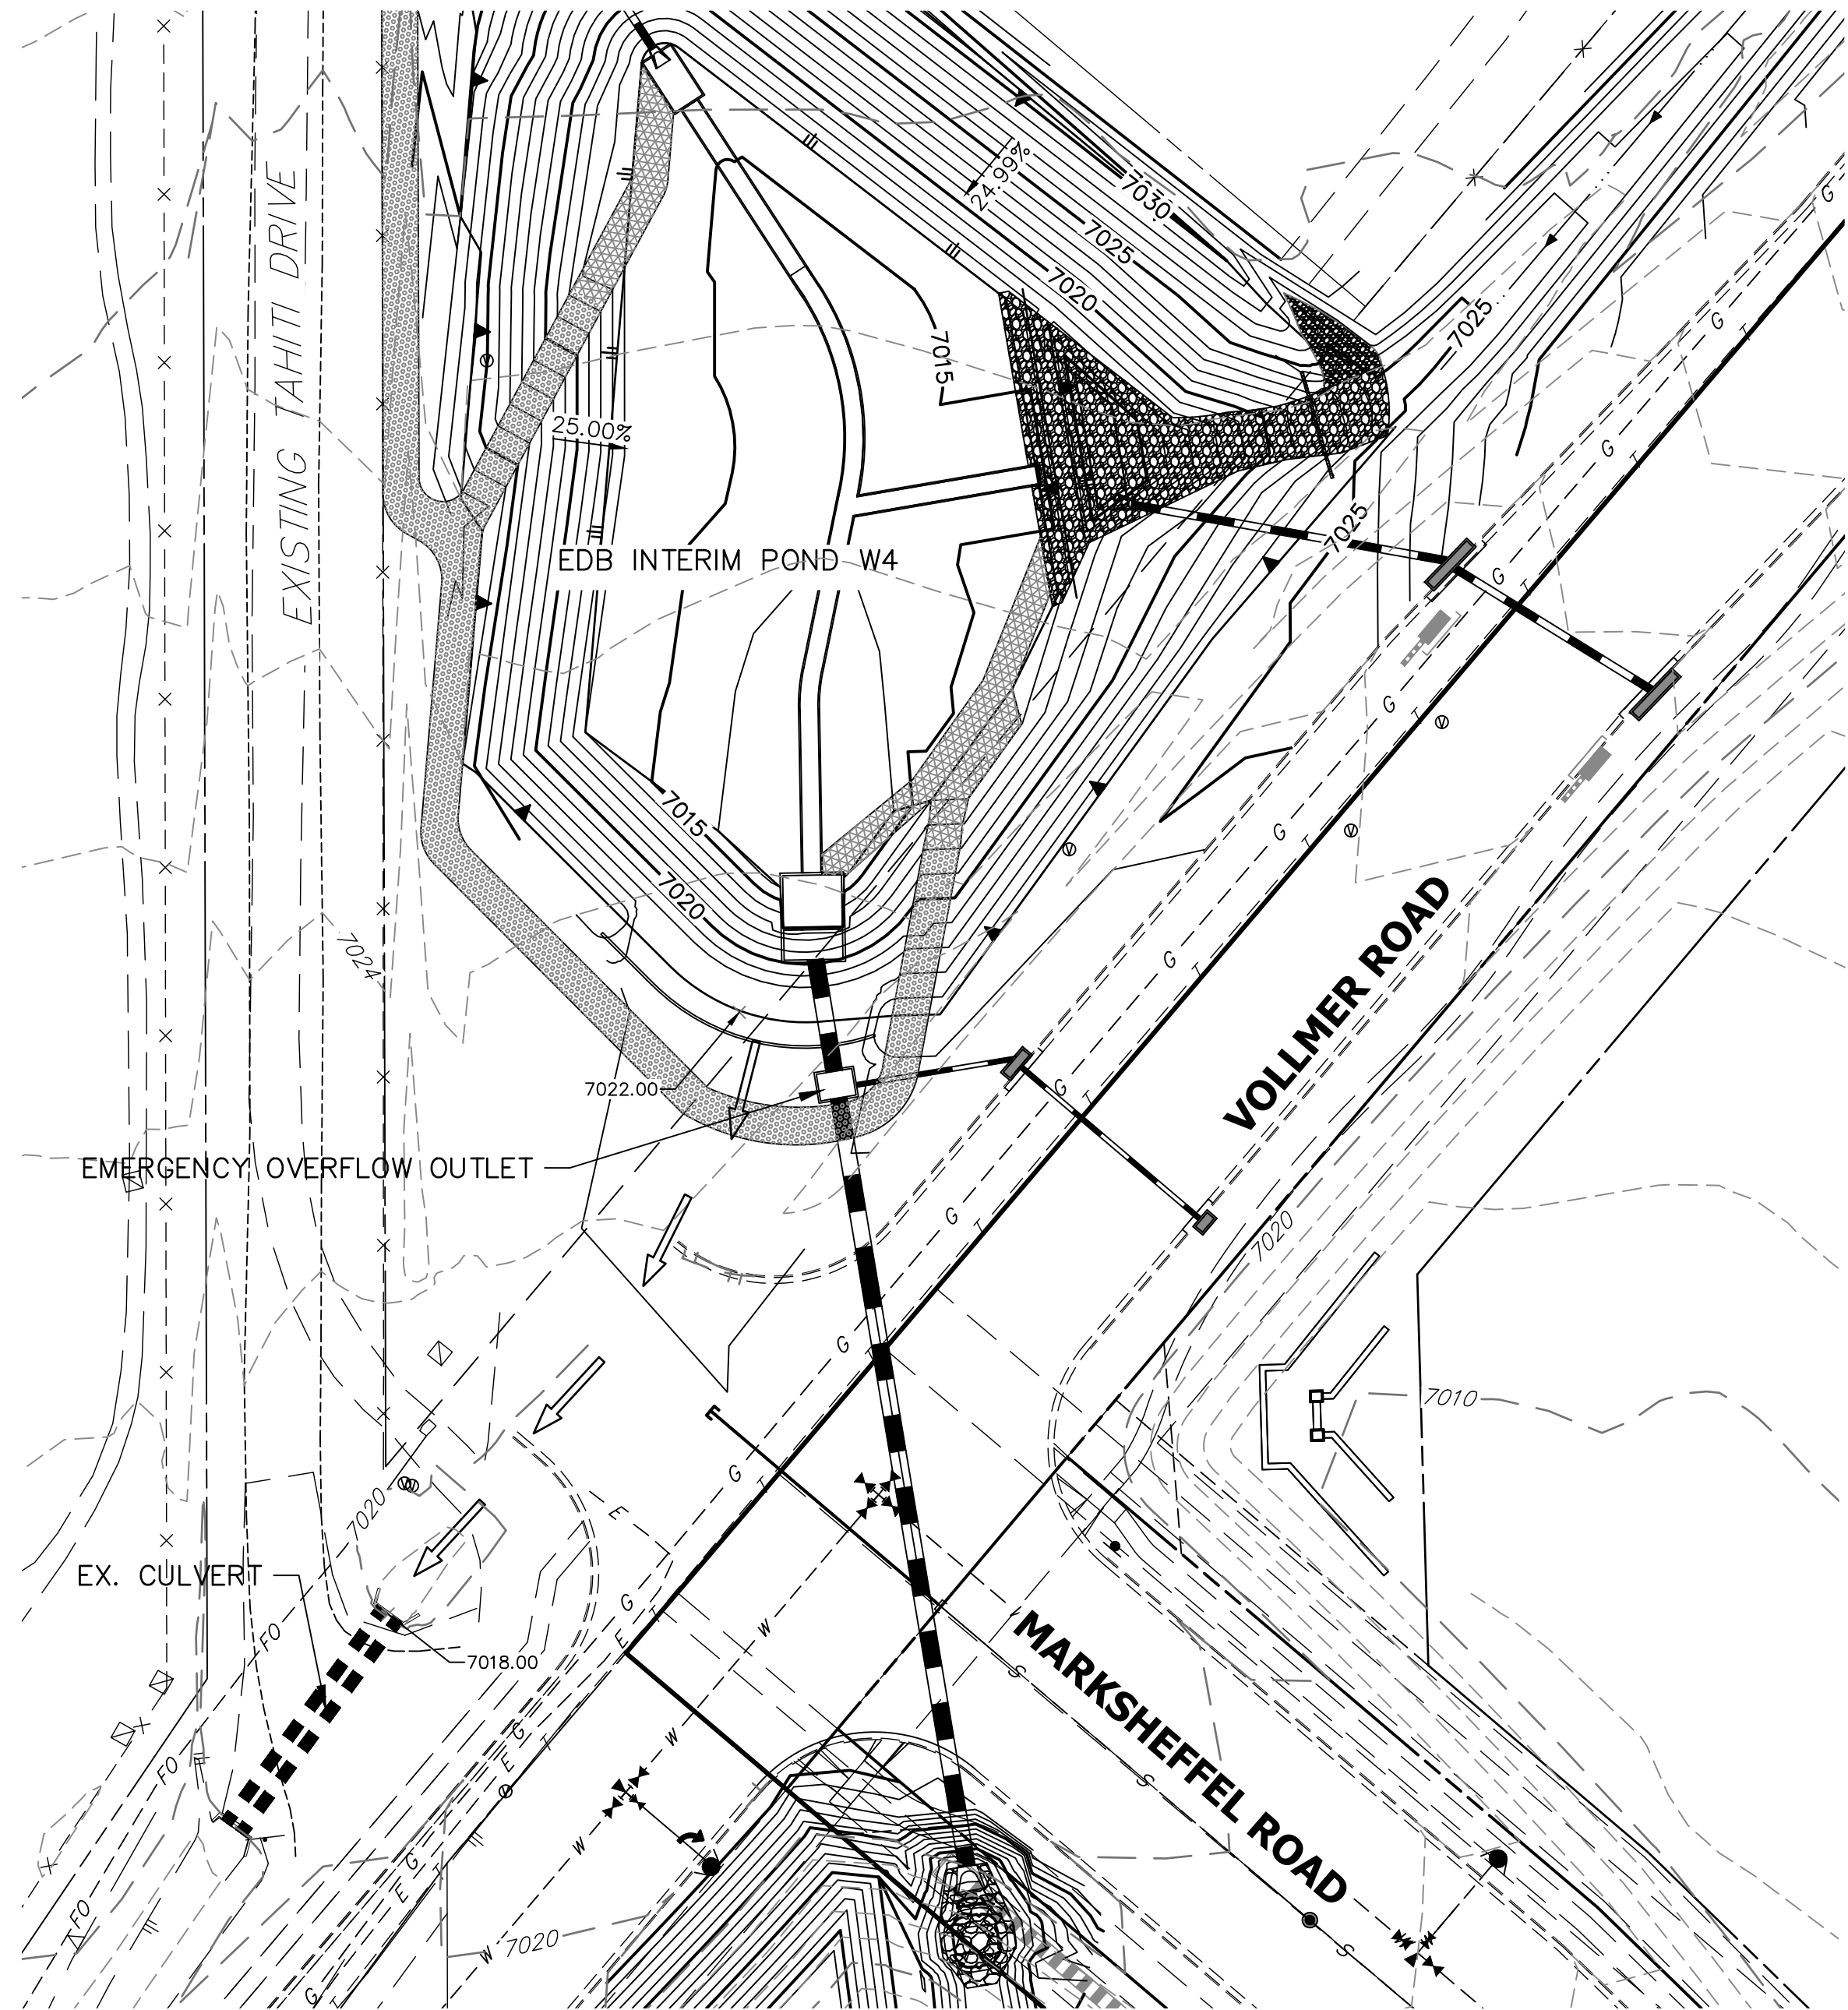

**POND W4 EMERGENCY OVERFLOW INTERIM CONDITION**

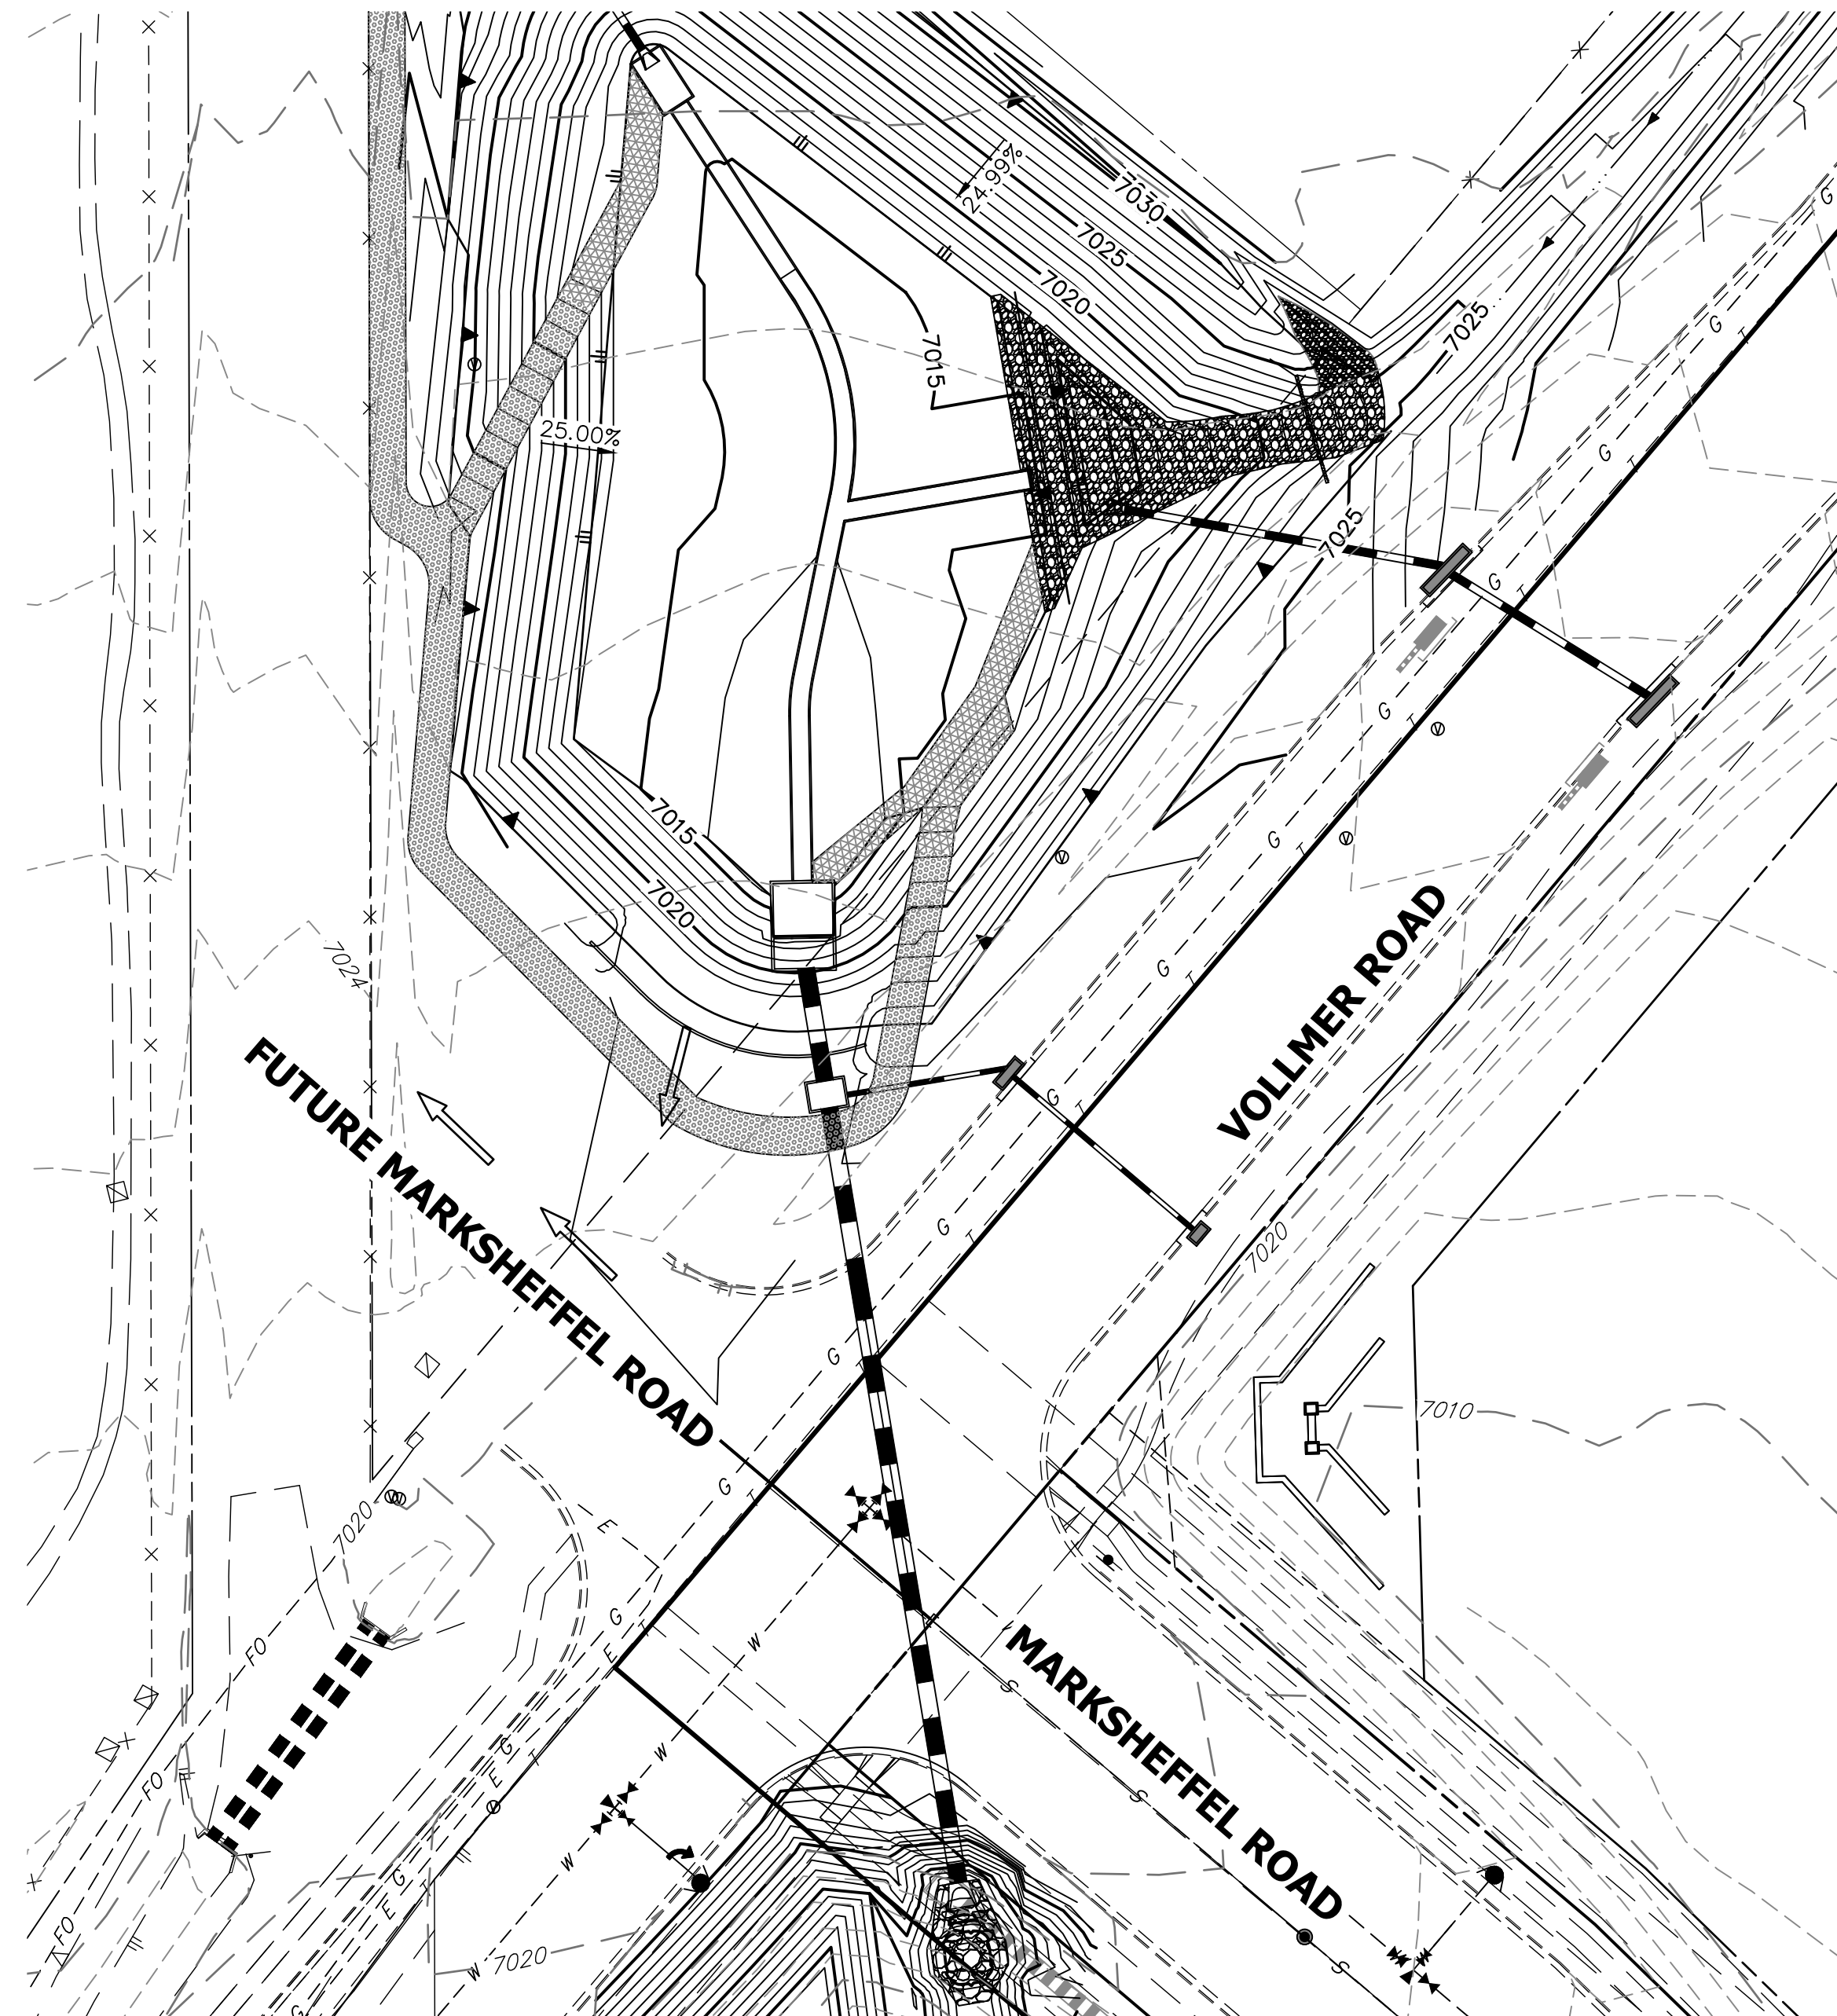

**POND W4 EMERGENCY OVERFLOW ULTIMATE CONDITION**

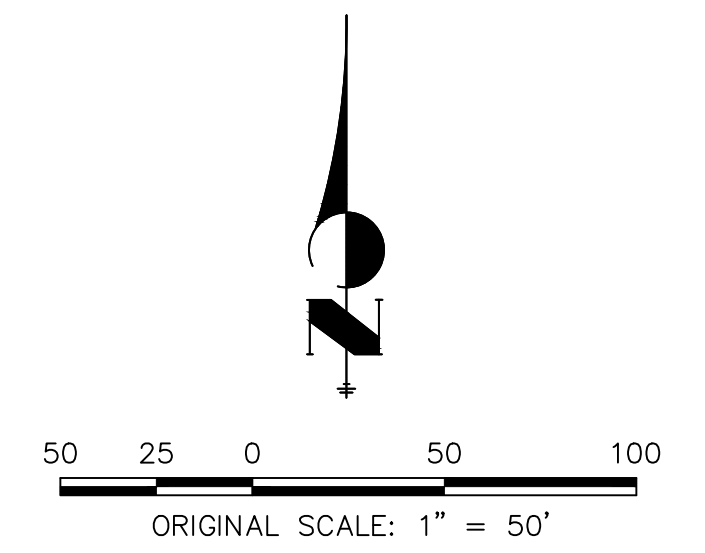

DRAINAGE MAP  
 STERLING RANCH FILING 2  
 JOB NO. 25188.01  
 6/23/21  
 SHEET 7 OF 7



Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com

X:\25188\000\all\25188\01\Drawings\Sheet\Design\Damage Maps\Pond W4 Emergency Overflow.dwg, 24x36 Title Landscape (2), 6/23/2021 3:14:12 PM, PC

**PRELIMINARY DRAINAGE REPORT  
FOR  
STERLING RANCH PHASE 3 PRELIMINARY PLAN**

**Prepared For:**

**SR Land, LLC  
20 Boulder Crescent, Suite 200  
Colorado Springs, CO 80903  
(719) 491-3024**

**December 1, 2020  
Project No. 25188.03**

**Prepared By:  
JR Engineering, LLC  
5475 Tech Center Drive, Suite 235  
Colorado Springs, CO 80919  
719-593-2593**

Step 3 – Treat the WQCV: Water Quality treatment for this site is provided in the proposed full spectrum water quality detention ponds. The runoff from this site will be collected within inlets and conveyed to the proposed ponds via storm sewer. Upon entrance to the ponds, flows will be captured in a forebay designed to promote settlement of suspended solids. A trickle channel will be incorporated into the ponds to minimize the amount of standing water. The outlet structure will be designed to detain the water quality capture volume (WQCV) for 40 hours, and the extended urban runoff volume (EURV) for 72 hours. All flows released from the ponds will be reduced to less than historic rates.

Step 4 –BMPs will be utilized to minimize off-site contaminants and to protect the downstream receiving waters. The permanent erosion control BMPs include asphalt drives and parking, storm inlets and storm pipe, four full spectrum water quality and detention ponds, and permanent vegetation.

**WATER QUALITY**

In accordance with Section 13.3.2.1 of the CCS/EPCDCM, full spectrum water quality and detention are provided for all developed basins. This site will drain into four Full Spectrum Drainage Ponds FSD14A, FSD11B, FSD16 and FSD14B. Further details as well as all pond volume, water quality, and outfall calculations will be included in the Sterling Ranch Phase 3 Final Drainage Report. A summary of Pond FSD11B and FSD11B has been included below for reference. Ponds FSD16 and FSD14B are sized per the MDDP and will be designed with the corresponding future development.

Table 3. Pond Volumes & Release Rates

|                | REQUIRED VOLUME<br>(AC-FT) | VOLUME PROVIDED<br>(AC-FT) | WQCV<br>(AC-FT) | EURV<br>(AC-FT) | 5-YEAR RELEASE<br>(CFS) | 100-YEAR RELEASE<br>(CFS) |
|----------------|----------------------------|----------------------------|-----------------|-----------------|-------------------------|---------------------------|
| POND<br>FSD14A | 15.5                       | 17.52                      | 2.86            | 9.5             | 7.5                     | 142.4                     |
| POND<br>FSD11B | 8.07                       | 9.7                        | 1.5             | 5.03            | 4.5                     | 69.6                      |

**EROSION CONTROL PLAN**

We respectfully request that the Erosion Control Plan and Cost Estimate be submitted in conjunction with the grading and erosion control plan and construction assurances posted prior to obtaining a grading permit.

**OPERATION & MAINTENANCE**



In order to ensure the function and effectiveness of the stormwater infrastructure, maintenance activities such as inspection, routine maintenance, restorative maintenance, rehabilitation and repair,





# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

*MHFD-Detention, Version 4.03 (May 2020)*

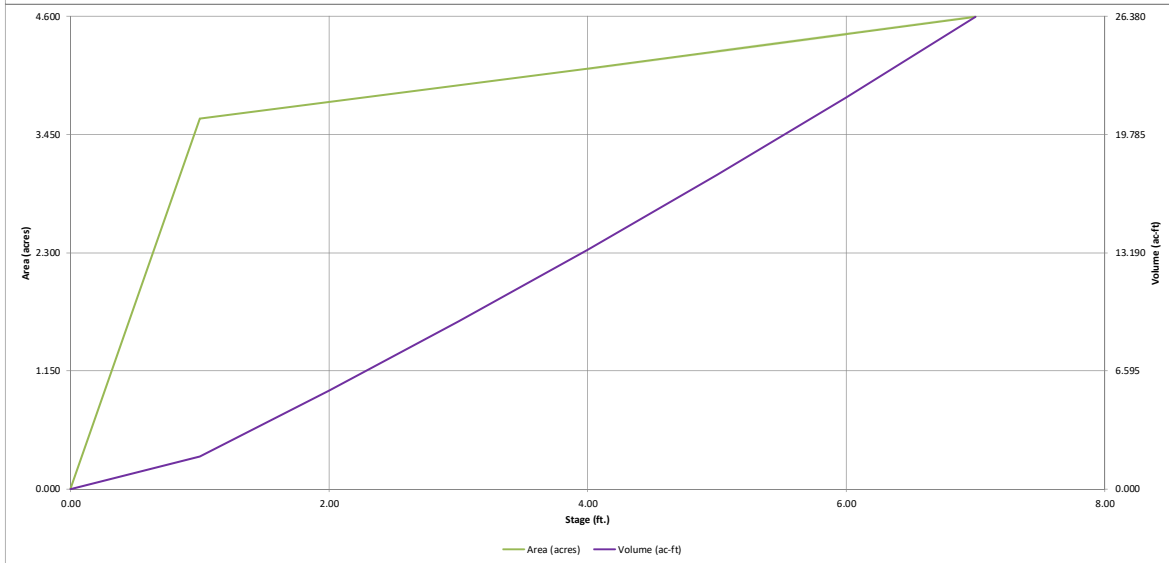
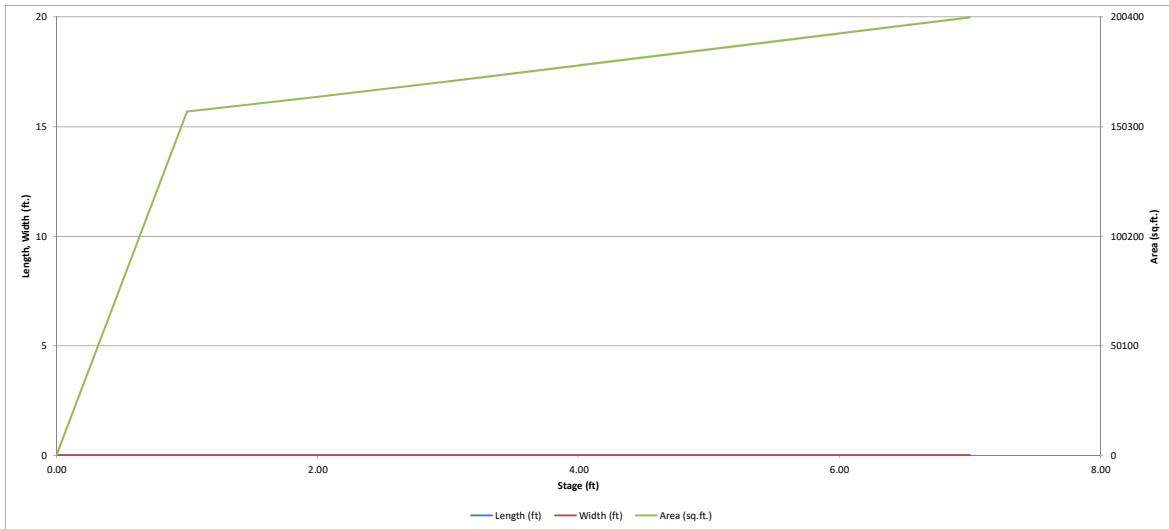






# DETENTION BASIN STAGE-STORAGE TABLE BUILDER



*MHFD-Detention, Version 4.03 (May 2020)*

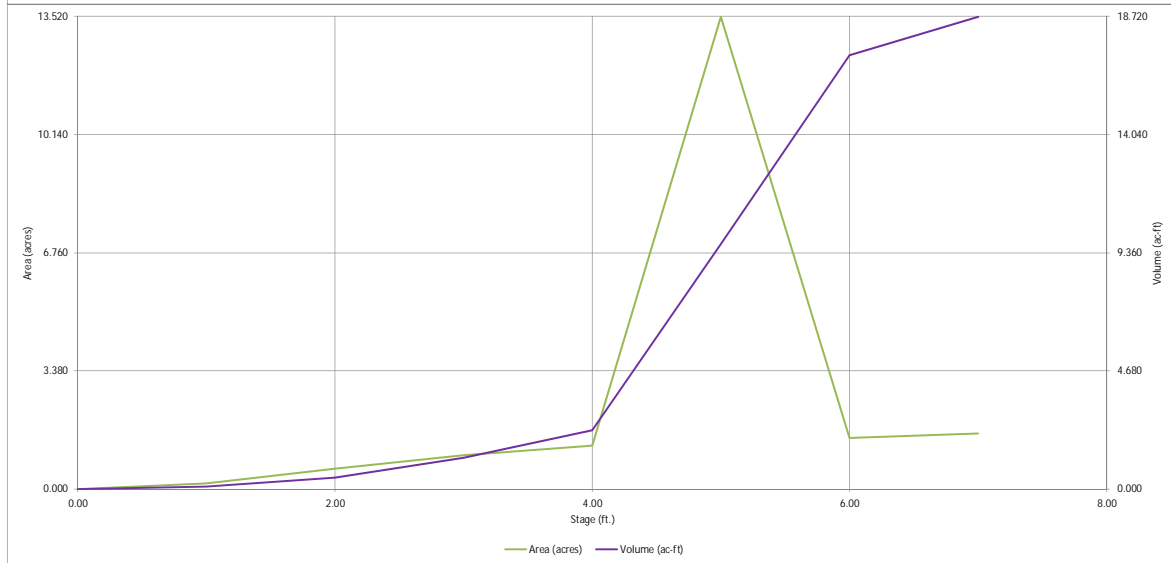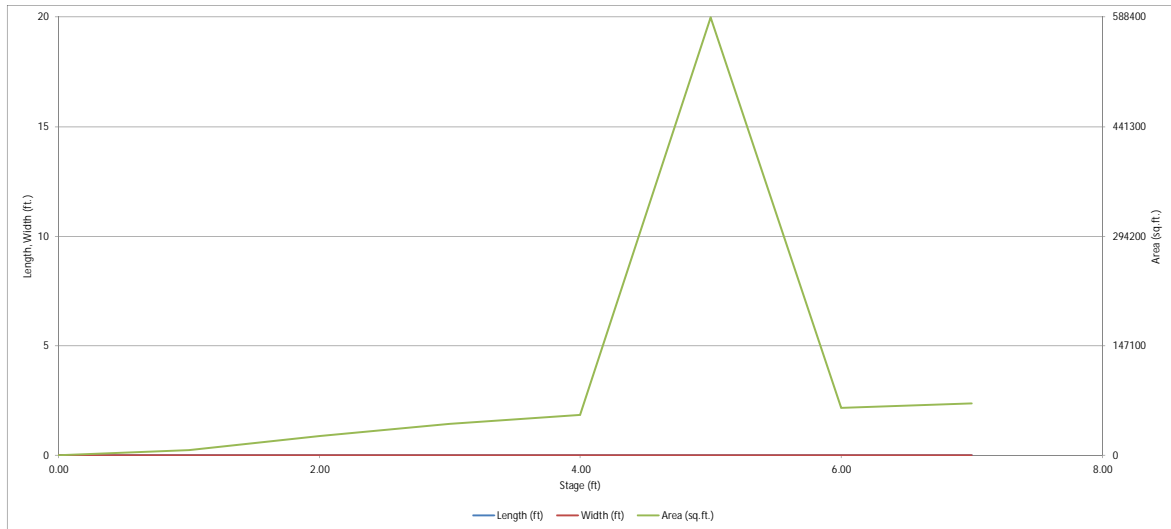








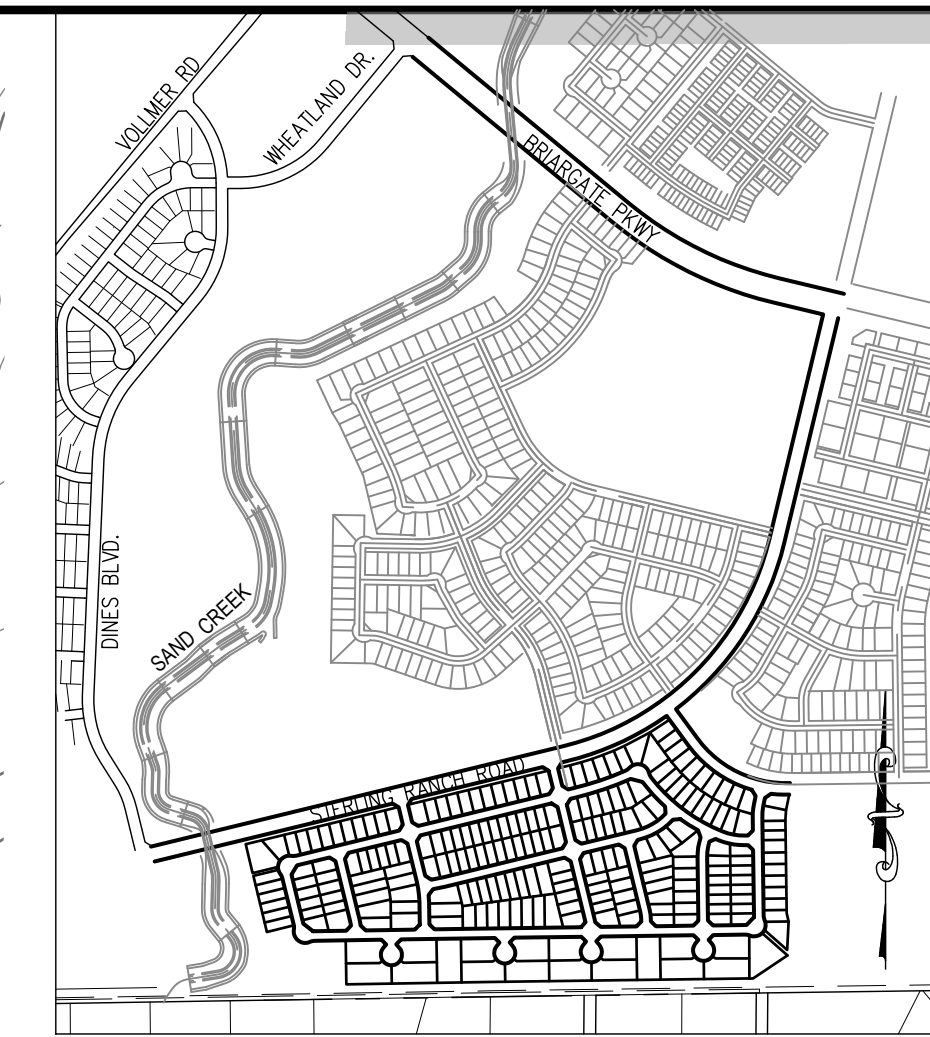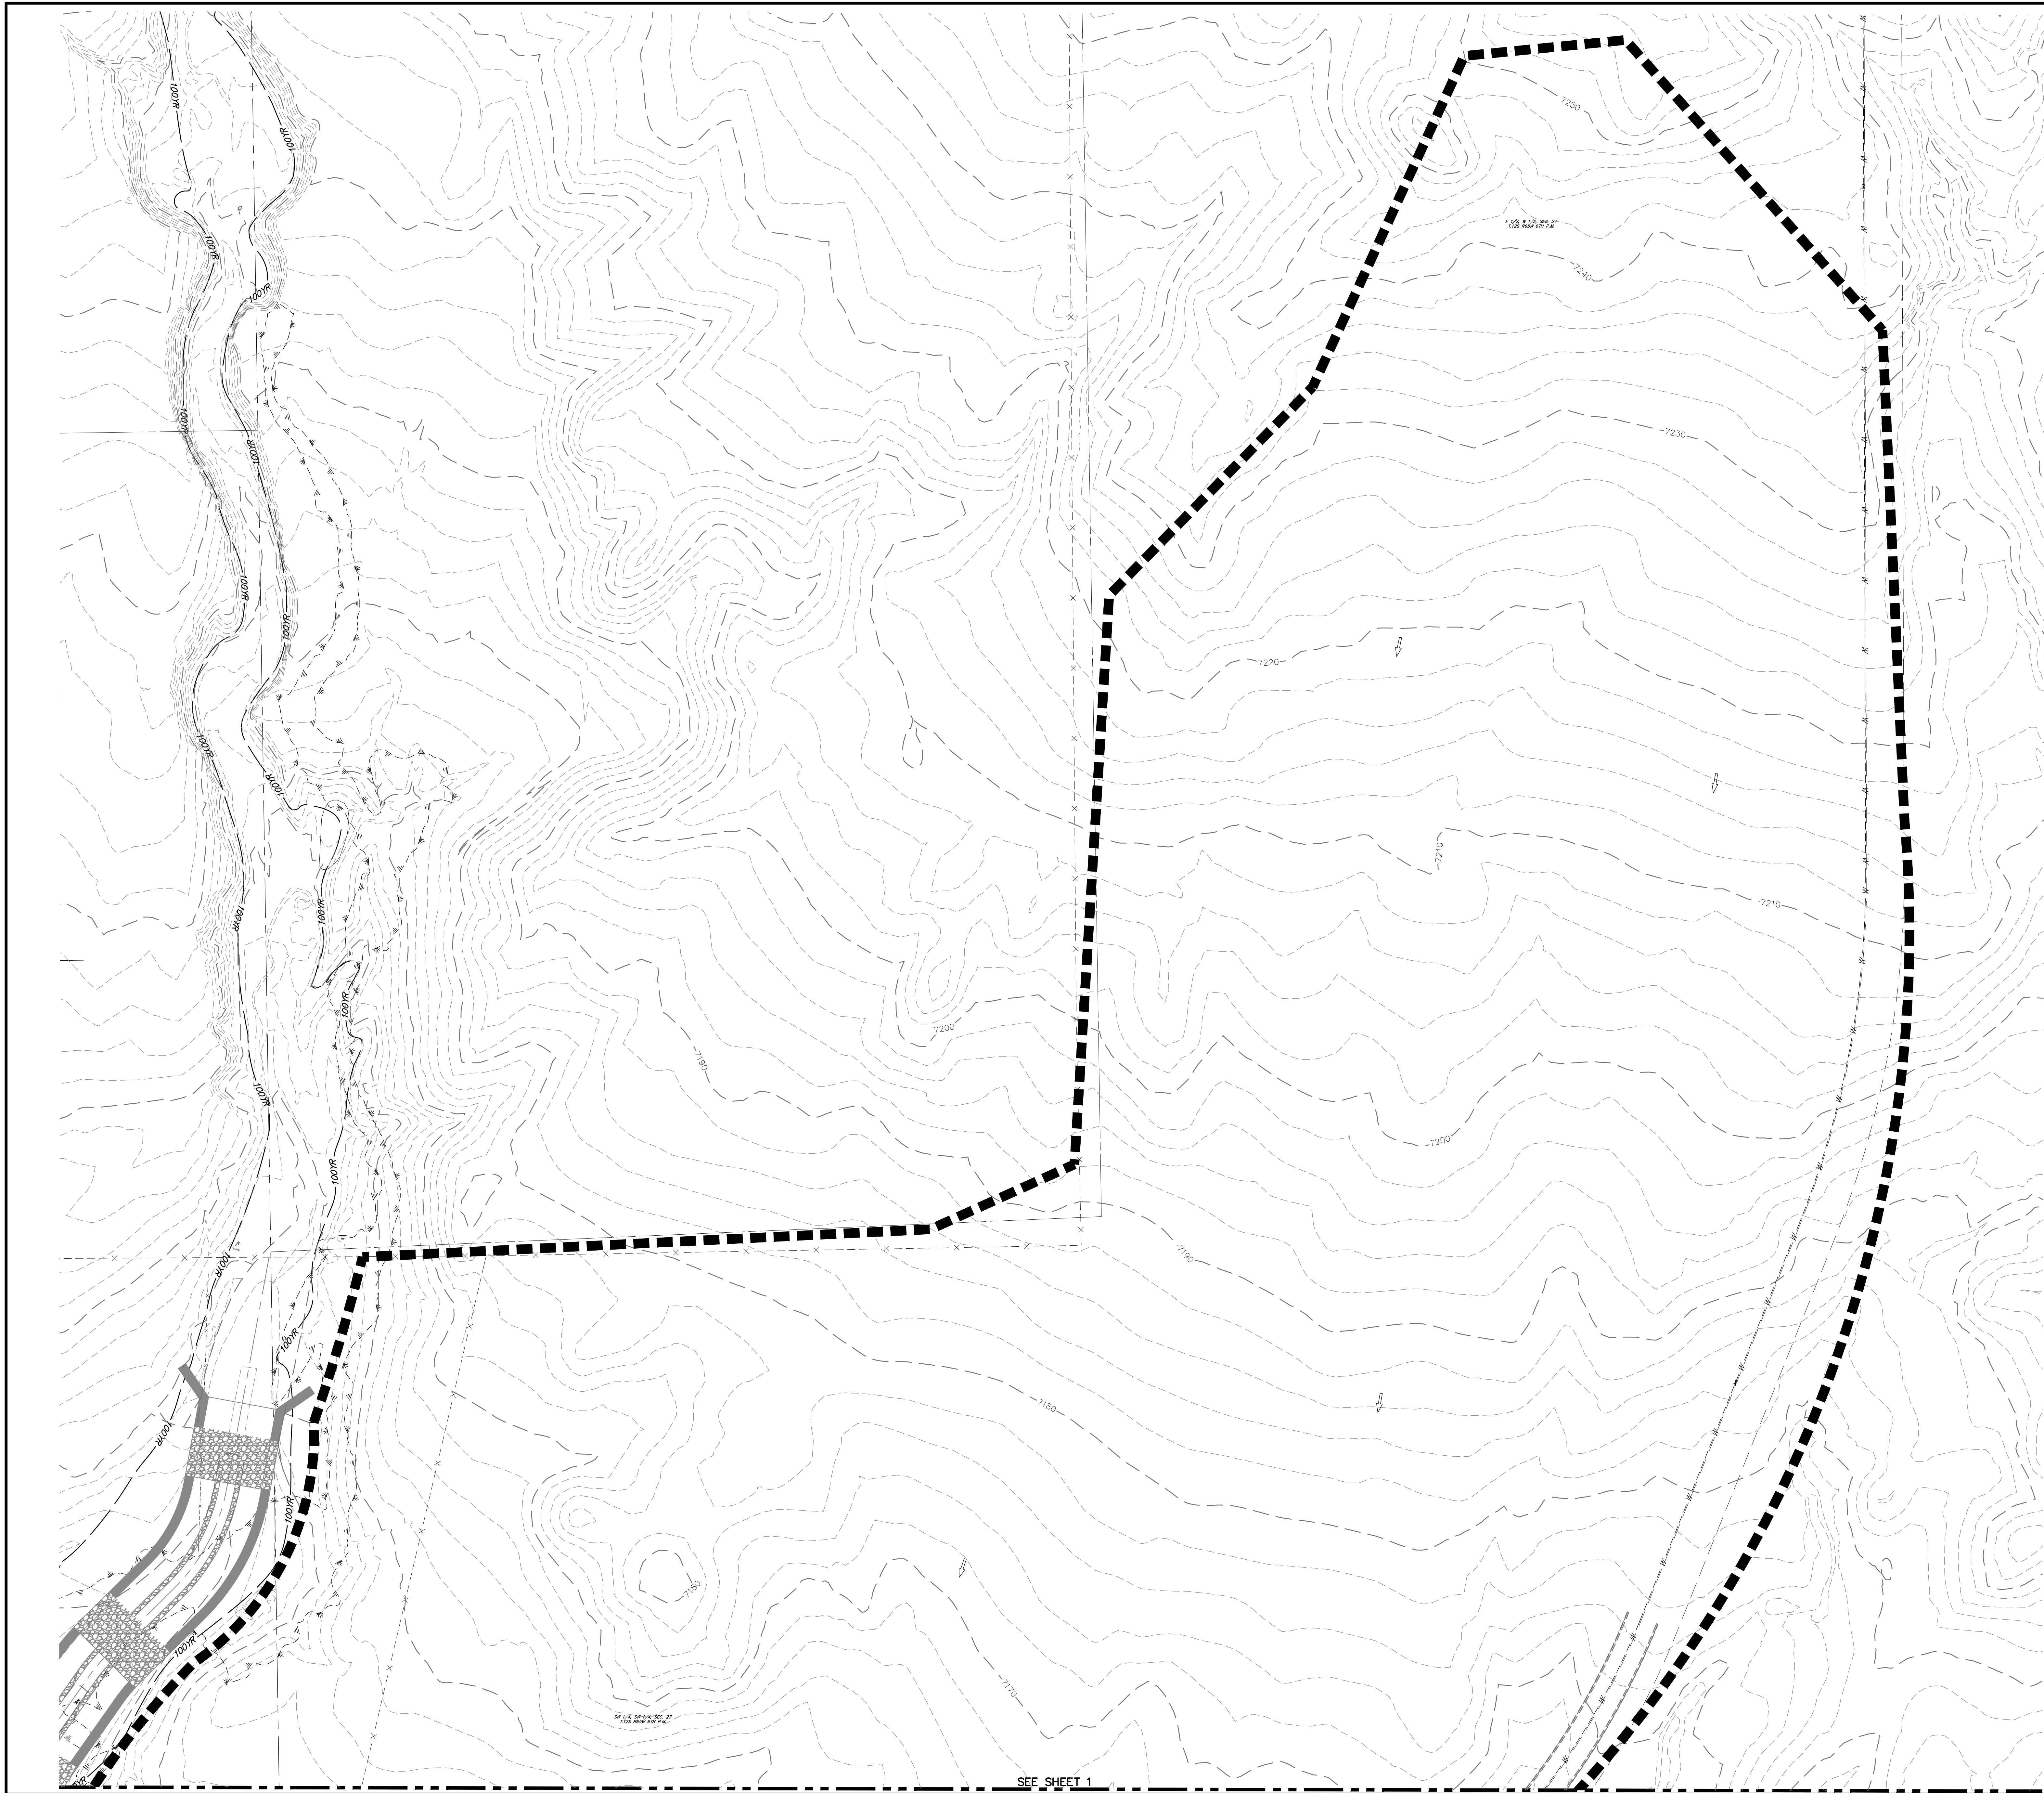

- LEGEND**
- BASIN ID
  - A: BASIN LABEL
  - B: AREA
  - C: C-100 YR
  - D: C-5 YR
- DESIGN POINT
- PROPOSED FLOW DIRECTION
- BASIN DRAINAGE AREA
- EXISTING STORM SEWER
- STORM SEWER PROPOSED
- PROPOSED R.O.W
- PROPOSED PROPERTY LINES
- EXISTING PROPERTY LINE
- ROW EXISTING
- FL EXISTING
- SIDEWALK EXISTING
- DRAINAGE ACCESS & MAINTENANCE EASEMENT

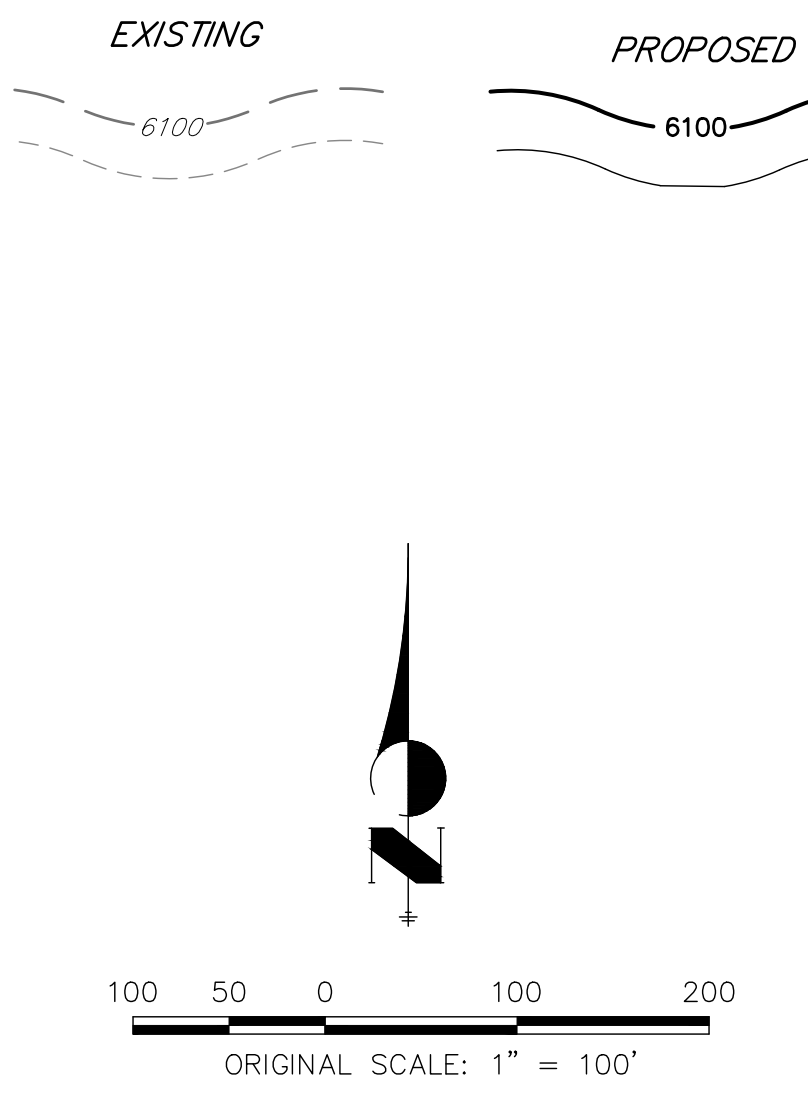

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, JR ENGINEERING APPROVES THEIR USE ONLY FOR THE PURPOSES LISTED AND BY WRITTEN AUTHORIZATION.

PREPARED FOR  
**SR LAND LLC**  
 20 BOULDER CRESCENT  
 SUITE 201  
 COLORADO SPRINGS, CO 80903  
 JAMES F. MORLEY  
 (719) 471-1742

**JR ENGINEERING**  
 A Western Company  
 Centennial 302-740-8888 • Colorado Springs 719-595-2588  
 Fort Collins 970-491-8888 • www.jrengineering.com

| NO. | REVISION | BY | DATE |
|-----|----------|----|------|
|     |          |    |      |
|     |          |    |      |
|     |          |    |      |

| H-SCALE | V-SCALE | DATE       | DESIGNED BY | DRAWN BY | CHECKED BY |
|---------|---------|------------|-------------|----------|------------|
| 1"=100' | 1"=1'   | 12/01/2020 | RAB         | CGV      |            |

STERLING RANCH PHASE 3  
 PROPOSED CONDITIONS MAP



SHEET 2 OF 5  
 JOB NO. 25188.03



Know what's below.  
 Call before you dig.

SEE SHEET 1




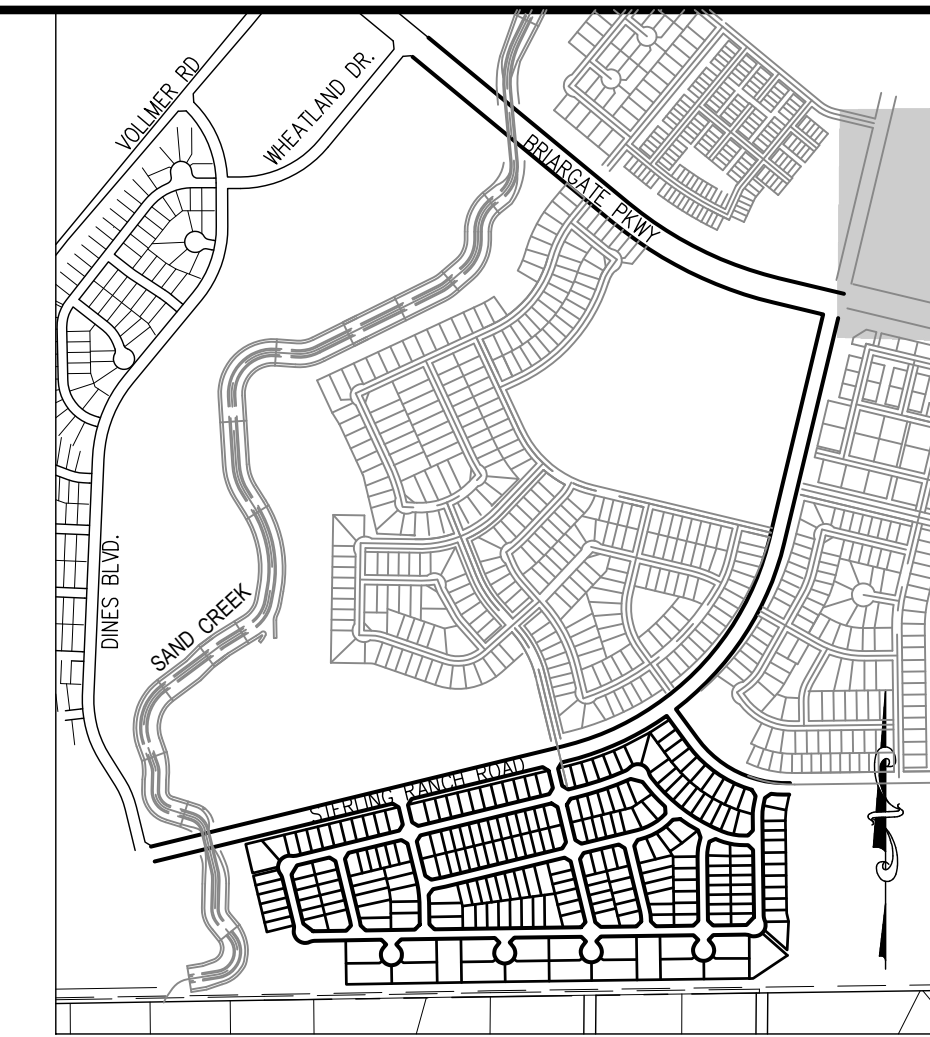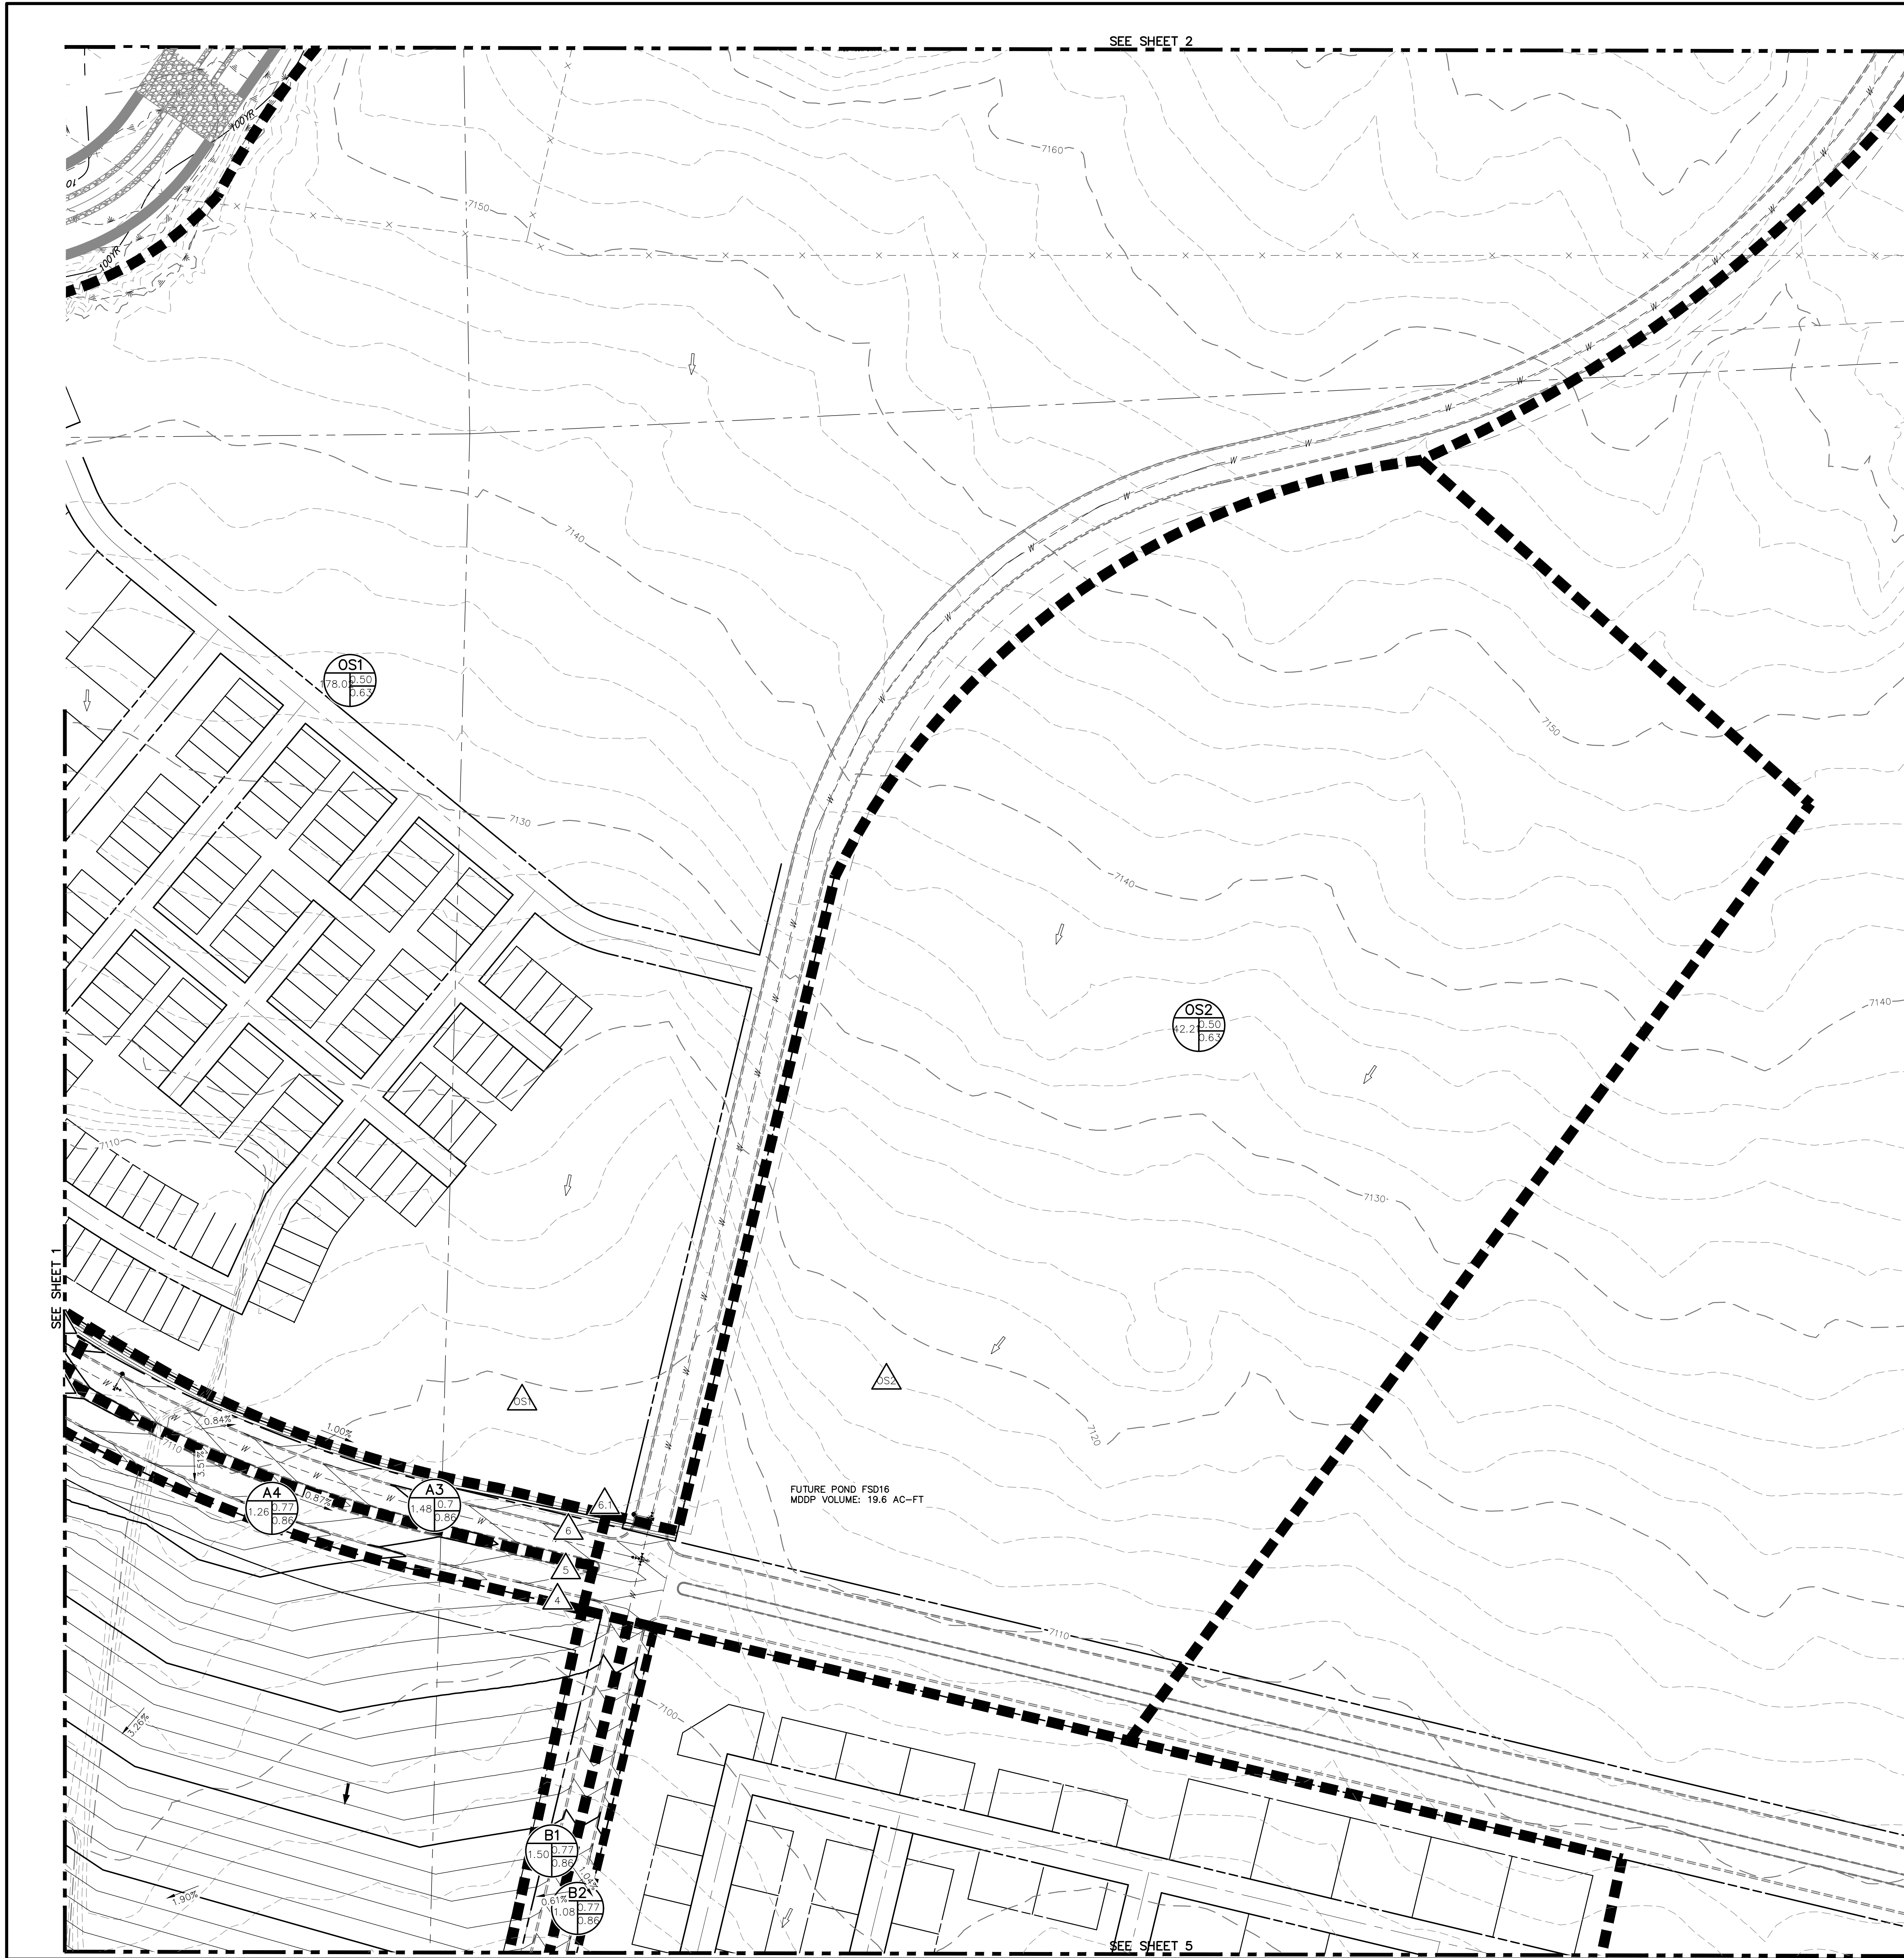

KEY MAP  
SCALE: NTS

**LEGEND**

- BASIN ID
  - A: BASIN LABEL
  - B: AREA
  - C: C - 100 YR
  - D: C - 5 YR
- 
- DESIGN POINT
  - PROPOSED FLOW DIRECTION
  - BASIN DRAINAGE AREA
  - EXISTING STORM SEWER
  - STORM SEWER PROPOSED
  - PROPOSED R.O.W
  - PROPOSED PROPERTY LINES
  - PROPOSED SIDEWALK
  - EXISTING PROPERTY LINE
  - ROW EXISTING
  - FL EXISTING
  - SIDEWALK EXISTING
  - DRAINAGE ACCESS & MAINTENANCE EASEMENT
- 

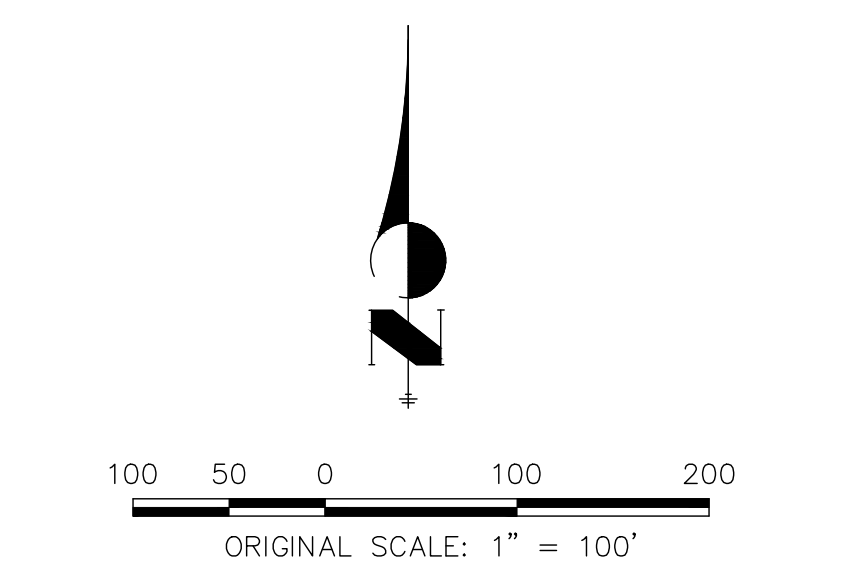

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, JR ENGINEERING APPROVES THEIR USE ONLY FOR THE PURPOSES INDICATED BY WRITTEN AUTHORIZATION.

PREPARED FOR  
**SR LAND LLC**  
20 BOULDER CRESCENT  
SUITE 201  
COLORADO SPRINGS, CO 80903  
JAMES F. MORLEY  
(719) 471-1742

**JR ENGINEERING**  
A Westman Company  
Central 303-740-8888 • Colorado Springs 719-596-2688  
Fort Collins 970-491-8888 • www.jrengineering.com


| NO. | REVISION | BY | DATE |
|-----|----------|----|------|
|     |          |    |      |
|     |          |    |      |
|     |          |    |      |
|     |          |    |      |

| H-SCALE   | V-SCALE | DATE       | DESIGNED BY | DRAWN BY | CHECKED BY |
|-----------|---------|------------|-------------|----------|------------|
| 1" = 100' | 1" = 1' | 12/01/2020 | RAB         | CGV      |            |

STERLING RANCH PHASE 3  
PROPOSED CONDITIONS MAP





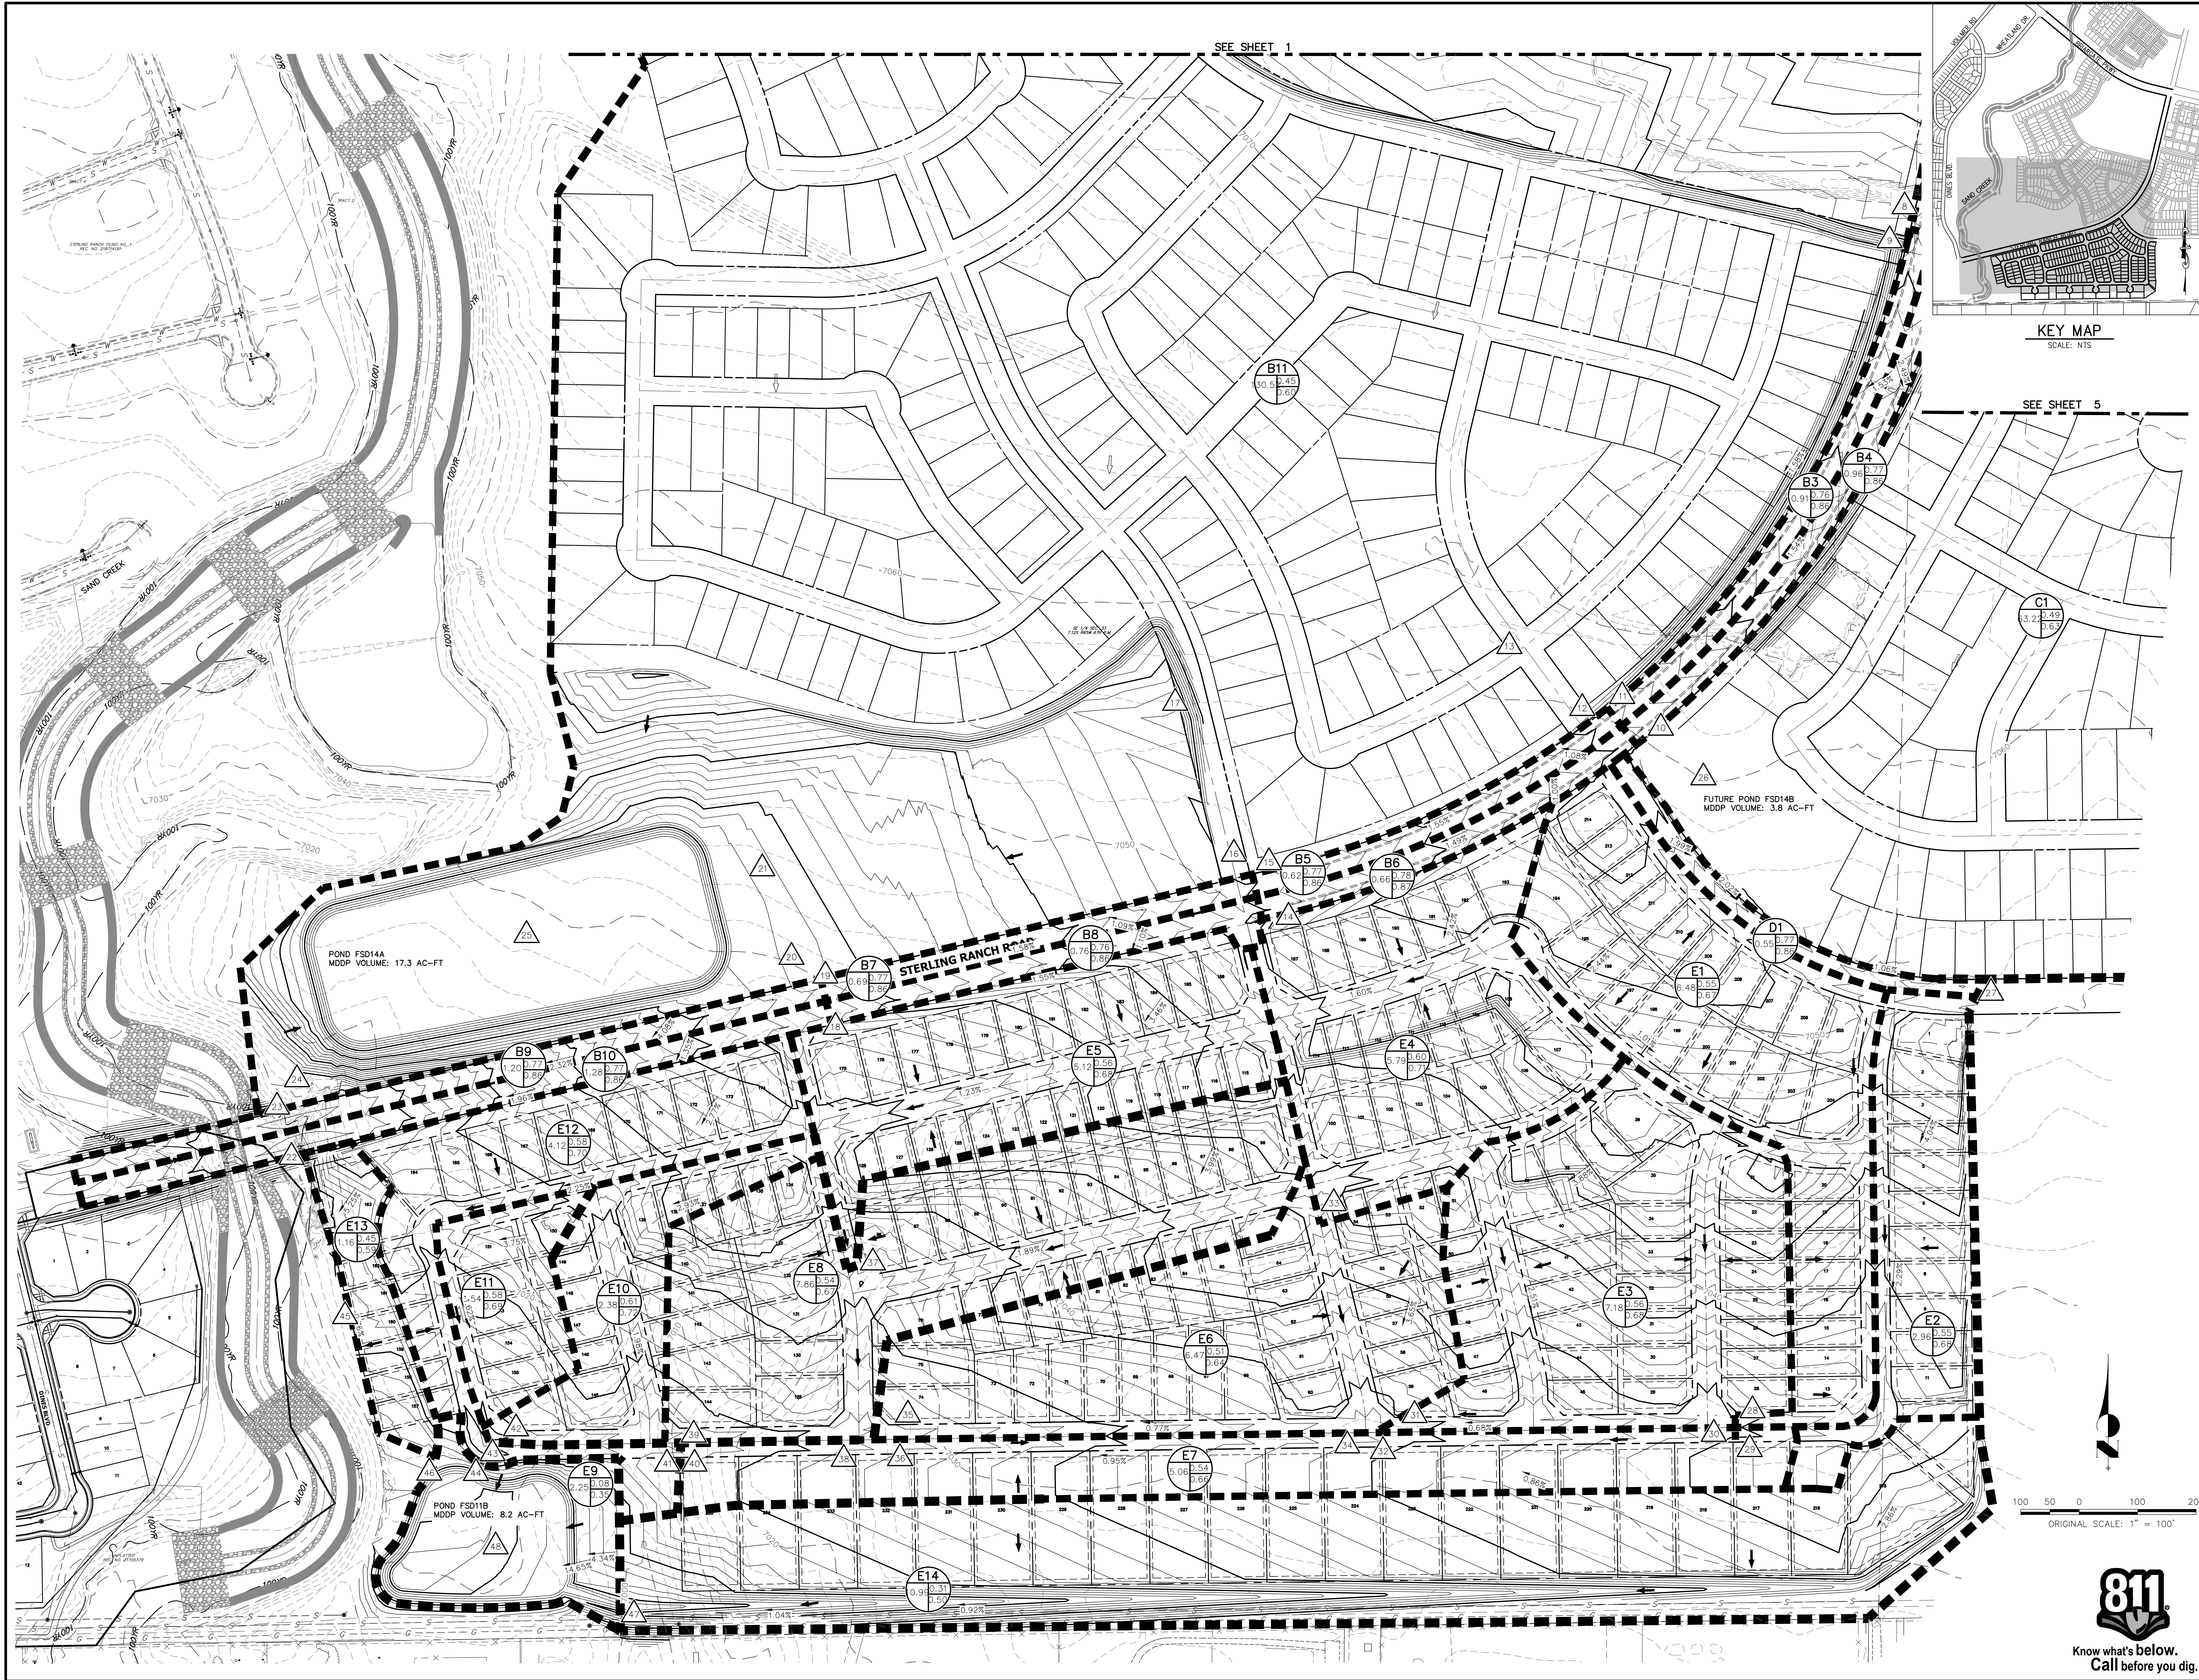


SEE SHEET 1



KEY MAP  
SCALE: NTS

SEE SHEET 5



UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, JR ENGINEERING APPROVES THEIR USE ONLY FOR THE PURPOSES INDICATED BY WRITTEN AUTHORIZATION.

PREPARED FOR  
**SR LAND LLC**  
20 BOULDER CRESCENT  
SUITE 201  
COLORADO SPRINGS, CO 80903  
JAMES F. MORLEY  
(719) 471-1742

**J.R. ENGINEERING**  
A Western Company  
Central 303-440-8888 • Colorado Springs 719-595-2688  
Fort Collins 970-491-8888 • www.jrengineering.com

| H-SCALE | V-SCALE | DATE       | DESIGNED BY | DRAWN BY | CHECKED BY | No. | REVISION | BY | DATE | STERLING RANCH PHASE 3 |                  |
|---------|---------|------------|-------------|----------|------------|-----|----------|----|------|------------------------|------------------|
|         |         |            |             |          |            |     |          |    |      | 1" = 100'              | 1" = 1"          |
|         |         | 12/01/2020 | RAB         | CGV      |            |     |          |    |      |                        | JOB NO. 25188.03 |







**FINAL DRAINAGE REPORT  
For  
Aspen Meadows**

**Sand Creek  
Drainage Basin**

Prepared for:  
**City of Colorado Springs**  
**Engineering Development Review Division Team**  
30 North Nevada Avenue, Suite 401  
Colorado Springs, CO 80903

On Behalf of:

**COLA, LLC.**  
7910 Gateway Boulevard, Suite 102  
El Paso, TX 79915

Prepared by:



2435 Research Parkway, Suite 300  
Colorado Springs, CO 80920  
(719) 575-0100  
fax (719) 572-0208

January 2019

Project No. 17.886.004

#### **D. Four-Step Process**

Per the DCM Chapter 1, Section 4, the City of Colorado Springs require the UDFCD Four Step Process for receiving water protection that focuses on reducing runoff volumes, treating the water quality capture volume (WQCV), stabilizing draingeways, and implementing long-term source controls. Stonebridge Development complies with this process in the following ways:

1. Reducing runoff volumes – the runoff reduction worksheet has been completed and can be found in Appendix C. An example of this step would be to provide landscaping in the available open space areas. Majority of runoff generated from this site area is being released/conveyed through overland flow and grassed swales which help to eliminate unnecessary impervious area.
2. These flows eventually discharge into Pond 1 which has been designed to treat the runoff for water quality and release flows at historic rates.
3. The runoff is routed through proposed storm sewer into proposed Pond 1. Downstream from Pond 1, treated release runoff enters existing Sand Creek Channel that conveys flows approximately 2,875 feet downstream, to another existing Detention Facility “Pond 3”.
4. Implementing long-term source controls – source control BMP’s such as temporary sedimentation basins, covering storage/handling areas and implementing containment/control measures, particularly around vehicular activities should be utilized to control potential source contaminants. The specific location(s) of source control areas will be identified within the SWMP as determined by the site superintendent.

#### **E. Detention and Water Quality**

Development of the site requires that full spectrum detention be provided to reduce the fully developed flows from the site to pre-project levels. This is due in part to the master planning of the area, as well as consideration of environmental impacts to existing downstream facilities. A full spectrum extended detention basin is proposed to treat the full spectrum of runoff from the single-family development and an extended water quality control volume detention area is proposed to treat runoff to Marksheffel Road. Please refer to Appendix C for UD-detention spreadsheet calculations for Pond 1 and the Marksheffel WQCV treatment pond.

To effectively treat the water quality runoff volume, each pond utilizes a small outlet structure to extend the time required to discharge the full volume of runoff. Treating the water quality volume requires an extended discharge time of 40 hours. This is the time required to achieve removal of a significant amount of total suspended solids (TSS). The ponds will also have low flow trickle channels which drain to a micro pool at the outlet structure, which is in place to promote biological uptake. Pond 1 was designed with a total watershed area of 21.45 Acres and 55.9% imperviousness. The WQCV treatment pond for Marksheffel Road was designed with a watershed of 8.09 Acres (including 5.7 Acres from Sub-basins A12 through A17 and 2.49 Acres from Sub-basins

RP-7C and RP-7D), and 91.2% watershed imperviousness. The basins and their structures are sized based on pre-development peak flows as calculated by the UD-Detention spreadsheet from UDFCD. The spreadsheets can be found in Appendix C.

The overall volume requirement calculated for the full spectrum EDB, which includes the water quality control volume, the excess urban runoff volume, and detention for storms from the 5-year (20% probability) to the 100-year (1% probability) is 2.32 acre-ft or 101,234 cubic feet. This total detention volume is slightly higher than the value indicated by UD-Detention (2.25 Acre-ft) in order to account for additional flows to Marksheffel Drive from portions of the development along Marksheffel Drive which cannot be diverted to Pond 1. The EURV volume in the lower portion of the detention volume will allow for low and high probability storms to be released to Sand Creek at rates which approximate pre-development conditions. This also reduces the higher probability storms (i.e. less than 2-year (50% probability)) to a level which is at or near the sediment carrying threshold value for the downstream drainageways. The proposed storm sewer drainage facilities will be publicly owned and maintained by the metro district.

The proposed outfall for Pond 1 must discharge the Q100 (1% probability flow) at 90% of the pre-development rate of 7.2 cfs for the development to comply with city requirements. The peak discharge rate is further decreased (overdetained) to 3.7 cfs to account for the portion of Aspen Meadows which adds a flow of approximately 3.5 cfs over the UD-Detention calculation for pre-development flows to Marksheffel Drive. This is a reduction from the pre-project Q100 discharge for the site which is estimated to be approximately 46 cfs.

The emergency overflow for the pond will be at the 5' stage and will discharge directly to Sand Creek.

## **Channel Improvements**

Sand Creek runs directly adjacent to the proposed Aspen Meadows development, running from the northeast to the southwest. Improvements to this channel are one of the conditions of development and Matrix Design Group, Inc. is designing these improvements under a different project and which will be covered under a separate submittal. Based on previous similar rehabilitation projects a rough estimate of stream rehabilitation for Sand Creek ranges from \$705 to \$1,340 per linear foot of channel improvement. For the 4,250-foot proposed project this means a range of \$2,996,250 to \$5,695,000 in projected construction costs. In the future, as the designs are refined, we will be able to narrow the cost estimate window.

## **VIII. Erosion Control Plan**


Per the city of Colorado Springs Drainage Criteria Manual Volume 1, an erosion control plan is required to be included with the drainage analysis. At this time, it is respectfully





# DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

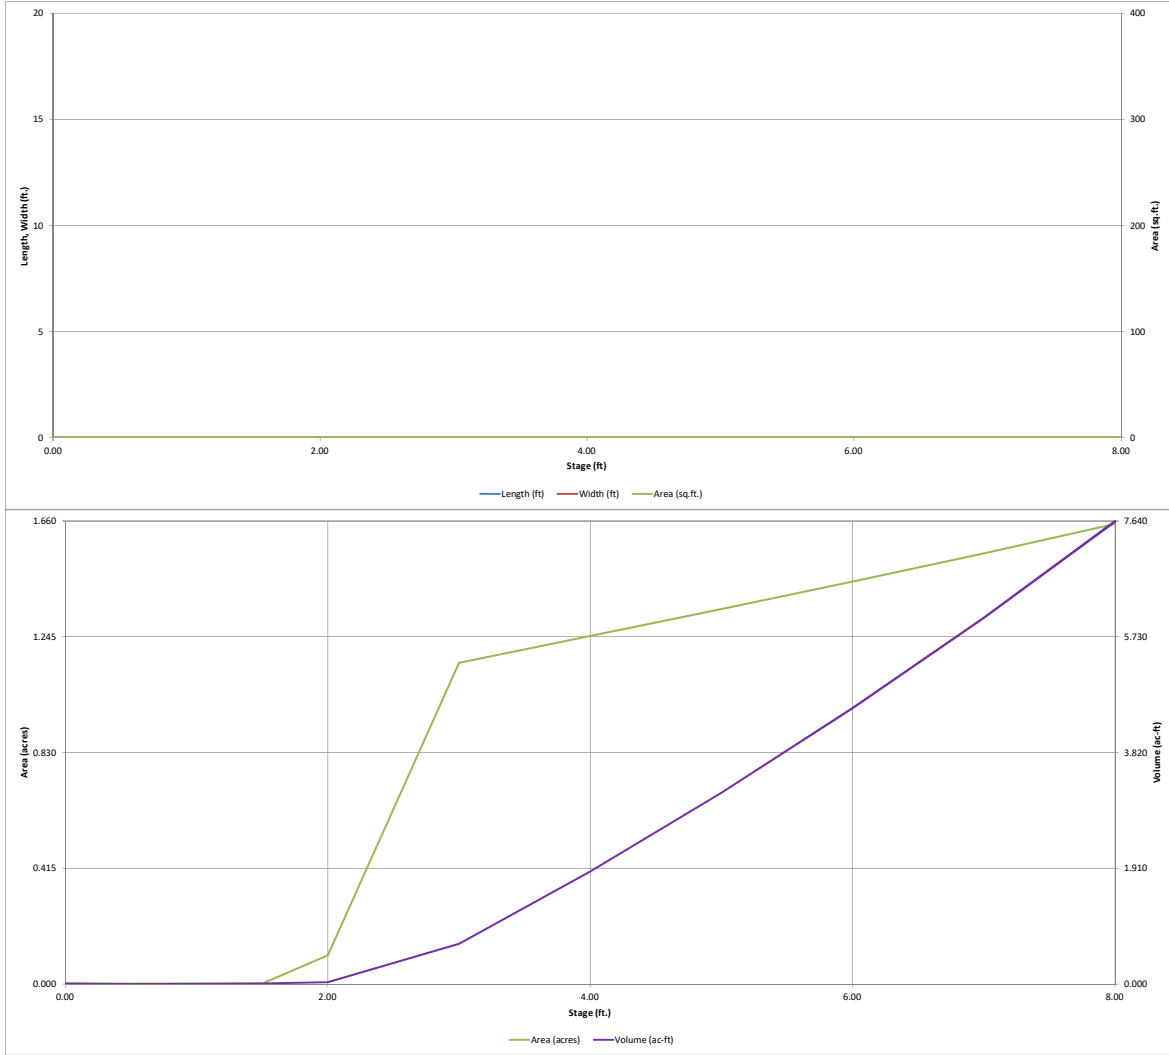


## Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: **Aspen Meadows**

Basin ID: **SINGLE FAMILY AREA OF 21.45 ACRES**



|                   | Stage (ft) | Zone Volume (ac-ft) | Outlet Type          |
|-------------------|------------|---------------------|----------------------|
| Zone 1 (WQCV)     | 2.75       | 0.399               | Orifice Plate        |
| Zone 2 (EURV)     | 3.65       | 1.021               | Rectangular Orifice  |
| Zone 3 (100-year) | 4.31       | 0.825               | Weir&Pipe (Circular) |
|                   |            | 2.246               | Total                |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =  ft (distance below the filtration media surface)  
Underdrain Orifice Diameter =  inches

Calculated Parameters for Underdrain

Underdrain Orifice Area =  ft<sup>2</sup>  
Underdrain Orifice Centroid =  feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =  ft (relative to basin bottom at Stage = 0 ft)  
Depth at top of Zone using Orifice Plate =  ft (relative to basin bottom at Stage = 0 ft)  
Orifice Plate: Orifice Vertical Spacing =  inches  
Orifice Plate: Orifice Area per Row =  sq. inches (diameter = 1-1/8 inches)

Calculated Parameters for Plate

WQ Orifice Area per Row =  ft<sup>2</sup>  
Elliptical Half-Width =  feet  
Elliptical Slot Centroid =  feet  
Elliptical Slot Area =  ft<sup>2</sup>

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

|                                | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00             | 0.91             | 1.82             |                  |                  |                  |                  |                  |
| Orifice Area (sq. inches)      | 1.00             | 1.00             | 1.00             |                  |                  |                  |                  |                  |

|                                | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) |                  |                   |                   |                   |                   |                   |                   |                   |
| Orifice Area (sq. inches)      |                  |                   |                   |                   |                   |                   |                   |                   |

User Input: Vertical Orifice (Circular or Rectangular)

|   | Zone 2 Rectangular                | Not Selected                     |   |
|---|-----------------------------------|----------------------------------|---|
| Invert of Vertical Orifice =                  | <input type="text" value="2.75"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | <input type="text" value="3.65"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Height =                     | <input type="text" value="2.00"/> | <input type="text" value="N/A"/> | inches  |
| Vertical Orifice Width =                      | <input type="text" value="6.67"/> |                                  | inches  |

Calculated Parameters for Vertical Orifice

|                             | Zone 2 Rectangular                | Not Selected                     |                 |
|-----------------------------|-----------------------------------|----------------------------------|-----------------|
| Vertical Orifice Area =     | <input type="text" value="0.09"/> | <input type="text" value="N/A"/> | ft <sup>2</sup> |
| Vertical Orifice Centroid = | <input type="text" value="0.08"/> | <input type="text" value="N/A"/> | feet            |

User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)

|                                       | Zone 3 Weir                       | Not Selected                     |   |
|---------------------------------------|-----------------------------------|----------------------------------|---|
| Overflow Weir Front Edge Height, Ho = | <input type="text" value="3.54"/> | <input type="text" value="N/A"/> | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length =     | <input type="text" value="3.00"/> | <input type="text" value="N/A"/> | feet  |
| Overflow Weir Slope =                 | <input type="text" value="0.00"/> | <input type="text" value="N/A"/> | H:V (enter zero for flat grate)               |
| Horiz. Length of Weir Sides =         | <input type="text" value="3.00"/> | <input type="text" value="N/A"/> | feet  |
| Overflow Grate Open Area % =          | <input type="text" value="70%"/>  | <input type="text" value="N/A"/> | %, grate open area/total area                 |
| Debris Clogging % =                   | <input type="text" value="50%"/>  | <input type="text" value="N/A"/> | %   |

Calculated Parameters for Overflow Weir

|  | Zone 3 Weir                        | Not Selected                     |                 |
|--|------------------------------------|----------------------------------|-----------------|
| Height of Grate Upper Edge, H <sub>1</sub> = | <input type="text" value="3.54"/>  | <input type="text" value="N/A"/> | feet            |
| Over Flow Weir Slope Length =                | <input type="text" value="3.00"/>  | <input type="text" value="N/A"/> | feet            |
| Grate Open Area / 100-yr Orifice Area =      | <input type="text" value="16.97"/> | <input type="text" value="N/A"/> | should be ≥ 4   |
| Overflow Grate Open Area w/o Debris =        | <input type="text" value="6.30"/>  | <input type="text" value="N/A"/> | ft <sup>2</sup> |
| Overflow Grate Open Area w/ Debris =         | <input type="text" value="3.15"/>  | <input type="text" value="N/A"/> | ft <sup>2</sup> |

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

|                                  | Zone 3 Circular                   | Not Selected                     |  |
|----------------------------------|-----------------------------------|----------------------------------|--|
| Depth to Invert of Outlet Pipe = | <input type="text" value="0.30"/> | <input type="text" value="N/A"/> | ft (distance below basin bottom at Stage = 0 ft) |
| Circular Orifice Diameter =      | <input type="text" value="8.25"/> | <input type="text" value="N/A"/> | inches   |

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

|  | Zone 3 Circular                   | Not Selected                     |                 |
|--|-----------------------------------|----------------------------------|-----------------|
| Outlet Orifice Area =                            | <input type="text" value="0.37"/> | <input type="text" value="N/A"/> | ft <sup>2</sup> |
| Outlet Orifice Centroid =                        | <input type="text" value="0.34"/> | <input type="text" value="N/A"/> | feet            |
| Half-Central Angle of Restrictor Plate on Pipe = | <input type="text" value="N/A"/>  | <input type="text" value="N/A"/> | radians         |

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage =  ft (relative to basin bottom at Stage = 0 ft)  
Spillway Crest Length =  feet  
Spillway End Slopes =  H:V  
Freeboard above Max Water Surface =  feet

Calculated Parameters for Spillway

Spillway Design Flow Depth =  feet  
Stage at Top of Freeboard =  feet  
Basin Area at Top of Freeboard =  acres




### Routed Hydrograph Results

|   | WQCV  | EURV             | 2 Year             | 5 Year             | 10 Year            | 25 Year          | 50 Year        | 100 Year       | 500 Year |
|---|-------|------------------|--------------------|--------------------|--------------------|------------------|----------------|----------------|----------|
| Design Storm Return Period =                  |       |                  |                    |                    |                    |                  |                |                |          |
| One-Hour Rainfall Depth (in) =                | 0.53  | 1.07             | 0.95               | 1.23               | 1.49               | 1.88             | 2.21           | 2.57           | 3.52     |
| Calculated Runoff Volume (acre-ft) =          | 0.399 | 1.420            | 0.782              | 1.055              | 1.348              | 1.842            | 2.350          | 2.959          | 4.557    |
| OPTIONAL Override Runoff Volume (acre-ft) =   |       |                  |                    |                    |                    |                  |                |                |          |
| Inflow Hydrograph Volume (acre-ft) =          | 0.399 | 1.421            | 0.783              | 1.056              | 1.349              | 1.843            | 2.352          | 2.961          | 4.560    |
| Predevelopment Unit Peak Flow, q (cfs/acre) = | 0.00  | 0.00             | 0.00               | 0.00               | 0.01               | 0.03             | 0.14           | 0.33           | 0.82     |
| Predevelopment Peak Q (cfs) =                 | 0.0   | 0.0              | 0.0                | 0.1                | 0.2                | 0.7              | 3.1            | 7.1            | 17.6     |
| Peak Inflow Q (cfs) =                         | 4.7   | 16.4             | 9.1                | 12.2               | 15.6               | 21.2             | 27.0           | 33.8           | 51.7     |
| Peak Outflow Q (cfs) =                        | 0.1   | 0.6              | 0.4                | 0.4                | 0.5                | 3.2              | 3.6            | 3.7            | 10.5     |
| Ratio Peak Outflow to Predevelopment Q =      | N/A   | N/A              | N/A                | 6.9                | 2.2                | 4.3              | 1.2            | 0.5            | 0.6      |
| Structure Controlling Flow =                  | Plate | Overflow Grate 1 | Vertical Orifice 1 | Vertical Orifice 1 | Vertical Orifice 1 | Overflow Grate 1 | Outlet Plate 1 | Outlet Plate 1 | Spillway |
| Max Velocity through Grate 1 (fps) =          | N/A   | 0.01             | N/A                | N/A                | N/A                | 0.4              | 0.5            | 0.5            | 0.5      |
| Max Velocity through Grate 2 (fps) =          | N/A   | N/A              | N/A                | N/A                | N/A                | N/A              | N/A            | N/A            | N/A      |
| Time to Drain 97% of Inflow Volume (hours) =  | 40    | 72               | 59                 | 65                 | 71                 | 73               | 72             | 72             | 70       |
| Time to Drain 99% of Inflow Volume (hours) =  | 42    | 76               | 61                 | 68                 | 75                 | 77               | 78             | 78             | 80       |
| Maximum Ponding Depth (ft) =                  | 2.71  | 3.56             | 3.05               | 3.27               | 3.50               | 3.75             | 4.04           | 4.44           | 5.31     |
| Area at Maximum Ponding Depth (acres) =       | 0.85  | 1.20             | 1.16               | 1.18               | 1.20               | 1.22             | 1.25           | 1.29           | 1.38     |
| Maximum Volume Stored (acre-ft) =             | 0.367 | 1.305            | 0.715              | 0.971              | 1.245              | 1.548            | 1.907          | 2.415          | 3.574    |



# Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

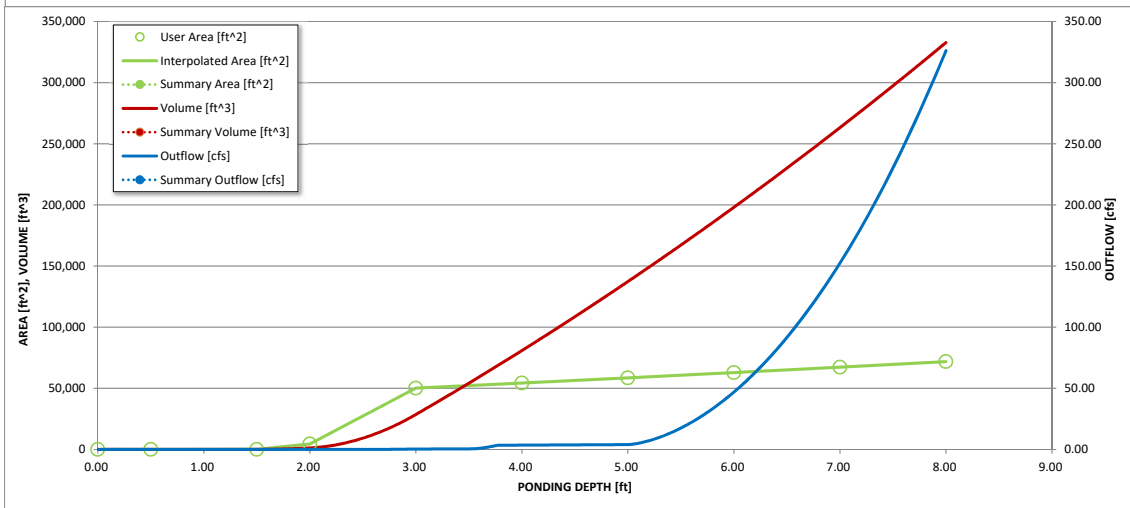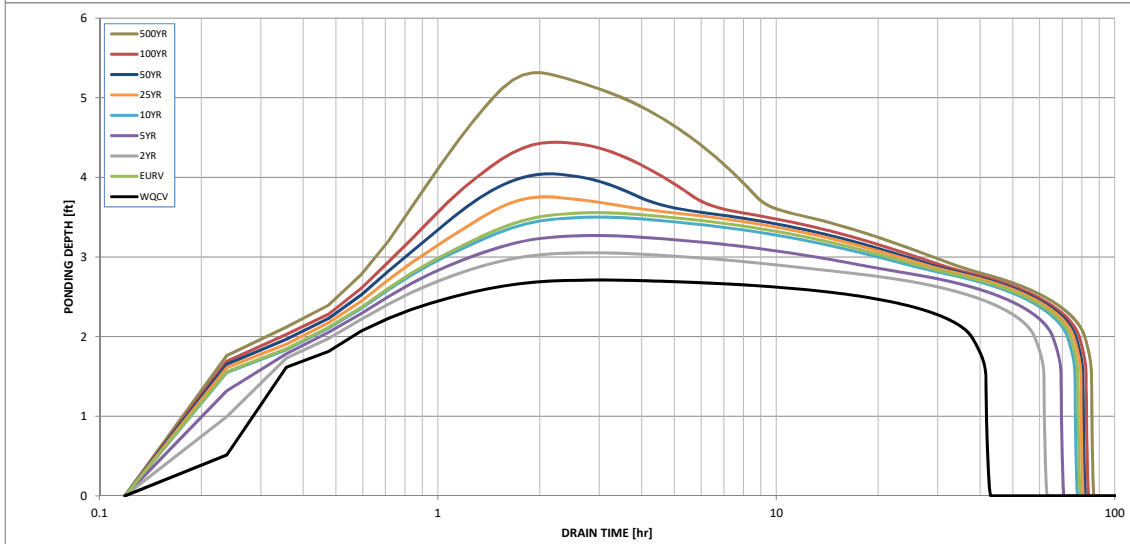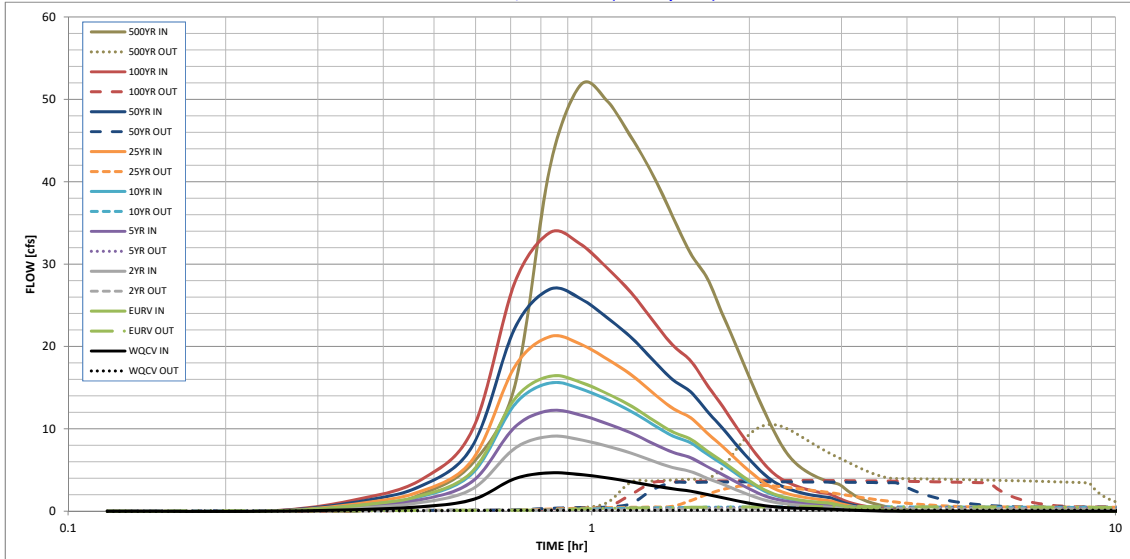

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound               |        |             |              |
| maximum bound               |        |             |              |







Know what's below.  
Call before you dig.

# ASPEN MEADOWS

## COLORADO SPRINGS, CO

### PROPOSED CONDITIONS MAP

| Design Point | Upstream     |          |            | Subbasins Included             |      | Inlet                      |  | Outlet Pipe Size/Type | Downstream Design Point |
|--------------|--------------|----------|------------|--------------------------------|------|----------------------------|--|-----------------------|-------------------------|
|              | Area (Acres) | Q5 (cfs) | Q100 (cfs) | Name                           | Type | Size (ft)                  |  |                       |                         |
| DP1          | 4.22         | 4.6      | 13.2       | A2                             | A2   | D 10 R                     | 8  | 24" RCP/HP            | D2                      |
| DP2          | 8.17         | 10.0     | 28.7       | A1,A2                          | A1   | D 10 R                     | 8  | 30" RCP/HP            | D5                      |
| DP3          | 0.93         | 1.5      | 4.2        | A3                             | A3   | D 10 R                     | 6  | 18" RCP/HP            | D4                      |
| DP4          | 1.31         | 2.0      | 5.7        | A3,A4                          | A4   | D 10 R                     | 6  | 18" RCP/HP            | D5                      |
| DP5          | 9.48         | 12.0     | 34.4       | A1,A2,A3,A4                    | D5   | MH                         | 6  | 30" RCP/HP            | D9                      |
| DP6          | 3.92         | 3.3      | 11.0       | A6                             | A6   | D 10 R                     | 8  | 24" RCP/HP            | D7                      |
| DP7          | 5.08         | 5.0      | 15.9       | A6,A7                          | A5   | D 10 R                     | 6  | 24" RCP/HP            | D8                      |
| DP8          | 0.43         | 0.7      | 1.9        | A8                             | A7   | D 10 R                     | 6  | 18" RCP/HP            | D8                      |
| DP9          | 16.10        | 19.3     | 56.8       | A1,A2,A3,A4,A6,A7,A8,A9        | A8   | D 10 R                     | 8  | 36" RCP/HP            | D10                     |
| DP10         | 2.00         | 2.8      | 8.0        | A5                             | A5   | D 10 R                     | 0  | 0                     | 0                       |
| DP Pond      | 21.45        | 24.4     | 75.1       | A1,A2,A3,A4,A5,A6,A7,A8,A9,A10 | A9   | Detention Outlet Structure | Orifice Plate: 1.02 Sq. In. (Stage 0, 9' & 1.06')<br>Overflow Weir/Grate: L=2', W=2' w/ slope: 0<br>Structure Outlet Pipe: 18" RCP/HP (10.5" Orifice Plate). |                       |                         |
| DP11         | 1.88         | 5.4      | 12.1       | A12                            | A12  | D 10 R                     | 16   | 18" RCP/HP            | D12                     |
| DP12         | 3.82         | 10.7     | 24.0       | A12,A13                        | A13  | D 10 R                     | 16   | 24" RCP/HP            | D14                     |
| DP13         | 0.71         | 2.7      | 6.0        | A14                            | A14  | D 10 R                     | 16   | 18" RCP/HP            | D14                     |
| DP14         | 5.24         | 16.0     | 36.0       | A12,A13,A14,A15                | A15  | D 10 R                     | 16   | 30" RCP/HP            | D16                     |
| DP15         | 1.90         | 4.8      | 11.6       | A16                            | A16  | D 10 R                     | 20   | 18" RCP/HP            | D16                     |
| DP16         | 8.09         | 24.3     | 55.4       | A12,A13,A14,A15,A16,A17        | A17  | D 10 R                     | 16   | 30" RCP/HP            | Sand Creek              |

| Basin Summary Table |              |          |            |  |
|---------------------|--------------|----------|------------|--|
| Aspen Meadows       |              |          |            |  |
| Area ID             | Area (Acres) | Q5 (cfs) | Q100 (cfs) |  |
| RP-7C               | 1.28         | 2.8      | 6.4        |  |
| RP-7D               | 1.21         | 2.9      | 6.5        |  |
| A1                  | 4.22         | 5.4      | 15.5       |  |
| A2                  | 3.95         | 4.6      | 13.2       |  |
| A3                  | 0.93         | 1.5      | 4.2        |  |
| A4                  | 0.38         | 0.5      | 1.5        |  |
| A5                  | 2.00         | 2.8      | 8.0        |  |
| A6                  | 3.92         | 3.3      | 11.0       |  |
| A7                  | 1.17         | 1.7      | 4.8        |  |
| A8                  | 0.43         | 0.7      | 1.9        |  |
| A9                  | 1.11         | 1.6      | 4.6        |  |
| A10                 | 3.34         | 2.3      | 10.3       |  |
| A11                 | 0.88         | 0.3      | 2.8        |  |
| A12                 | 0.67         | 2.5      | 5.6        |  |
| A13                 | 0.66         | 2.5      | 5.6        |  |
| A14                 | 0.71         | 2.7      | 6.0        |  |
| A15                 | 0.71         | 2.6      | 5.9        |  |
| A16                 | 1.90         | 4.8      | 11.6       |  |
| A17                 | 0.94         | 3.5      | 7.9        |  |

CONSULTANT:  
CIVIL ENGINEER:  
**Matrix**  
DESIGN GROUP  
2435 Research Parkway, Suite 300  
Colorado Springs, CO 80920  
Phone 719-575-0100  
Fax 719-575-0208  
LANDSCAPE ARCHITECT:  
Thomas & Thomas Planning-Urban  
614 N. Tejon Street  
Colorado Springs, CO 80903  
Phone (719)578-8777

PROJECT:  
**ASPEN MEADOWS**  
FILING NO. 1  
DEVELOPMENT PLAN  
CITY OF COLORADO SPRINGS  
JANUARY 2019  
OWNER:  
COLA, LLC  
555 MIDDLE PARKWAY  
COLORADO SPRINGS, CO 80921  
(719)459-0807


DEVELOPER:  
COLA, LLC  
555 MIDDLE PARKWAY  
COLORADO SPRINGS, CO 80921  
(719)459-0807  
CITY PLANNING FILE NO.: AR DP XXXXXXXXX  
ISSUE: JANUARY, 2019

DRAWING INFORMATION:  
PROJECT NO.: 17.886.004.000  
DRAWN BY: CRAIG DOLD  
CHECKED BY: JEFF ODOR  
APPROVED BY: JEFF ODOR  
SHEET TITLE:

## DRAINAGE REPORT MAP

# DR02


SHEET 2 OF 3

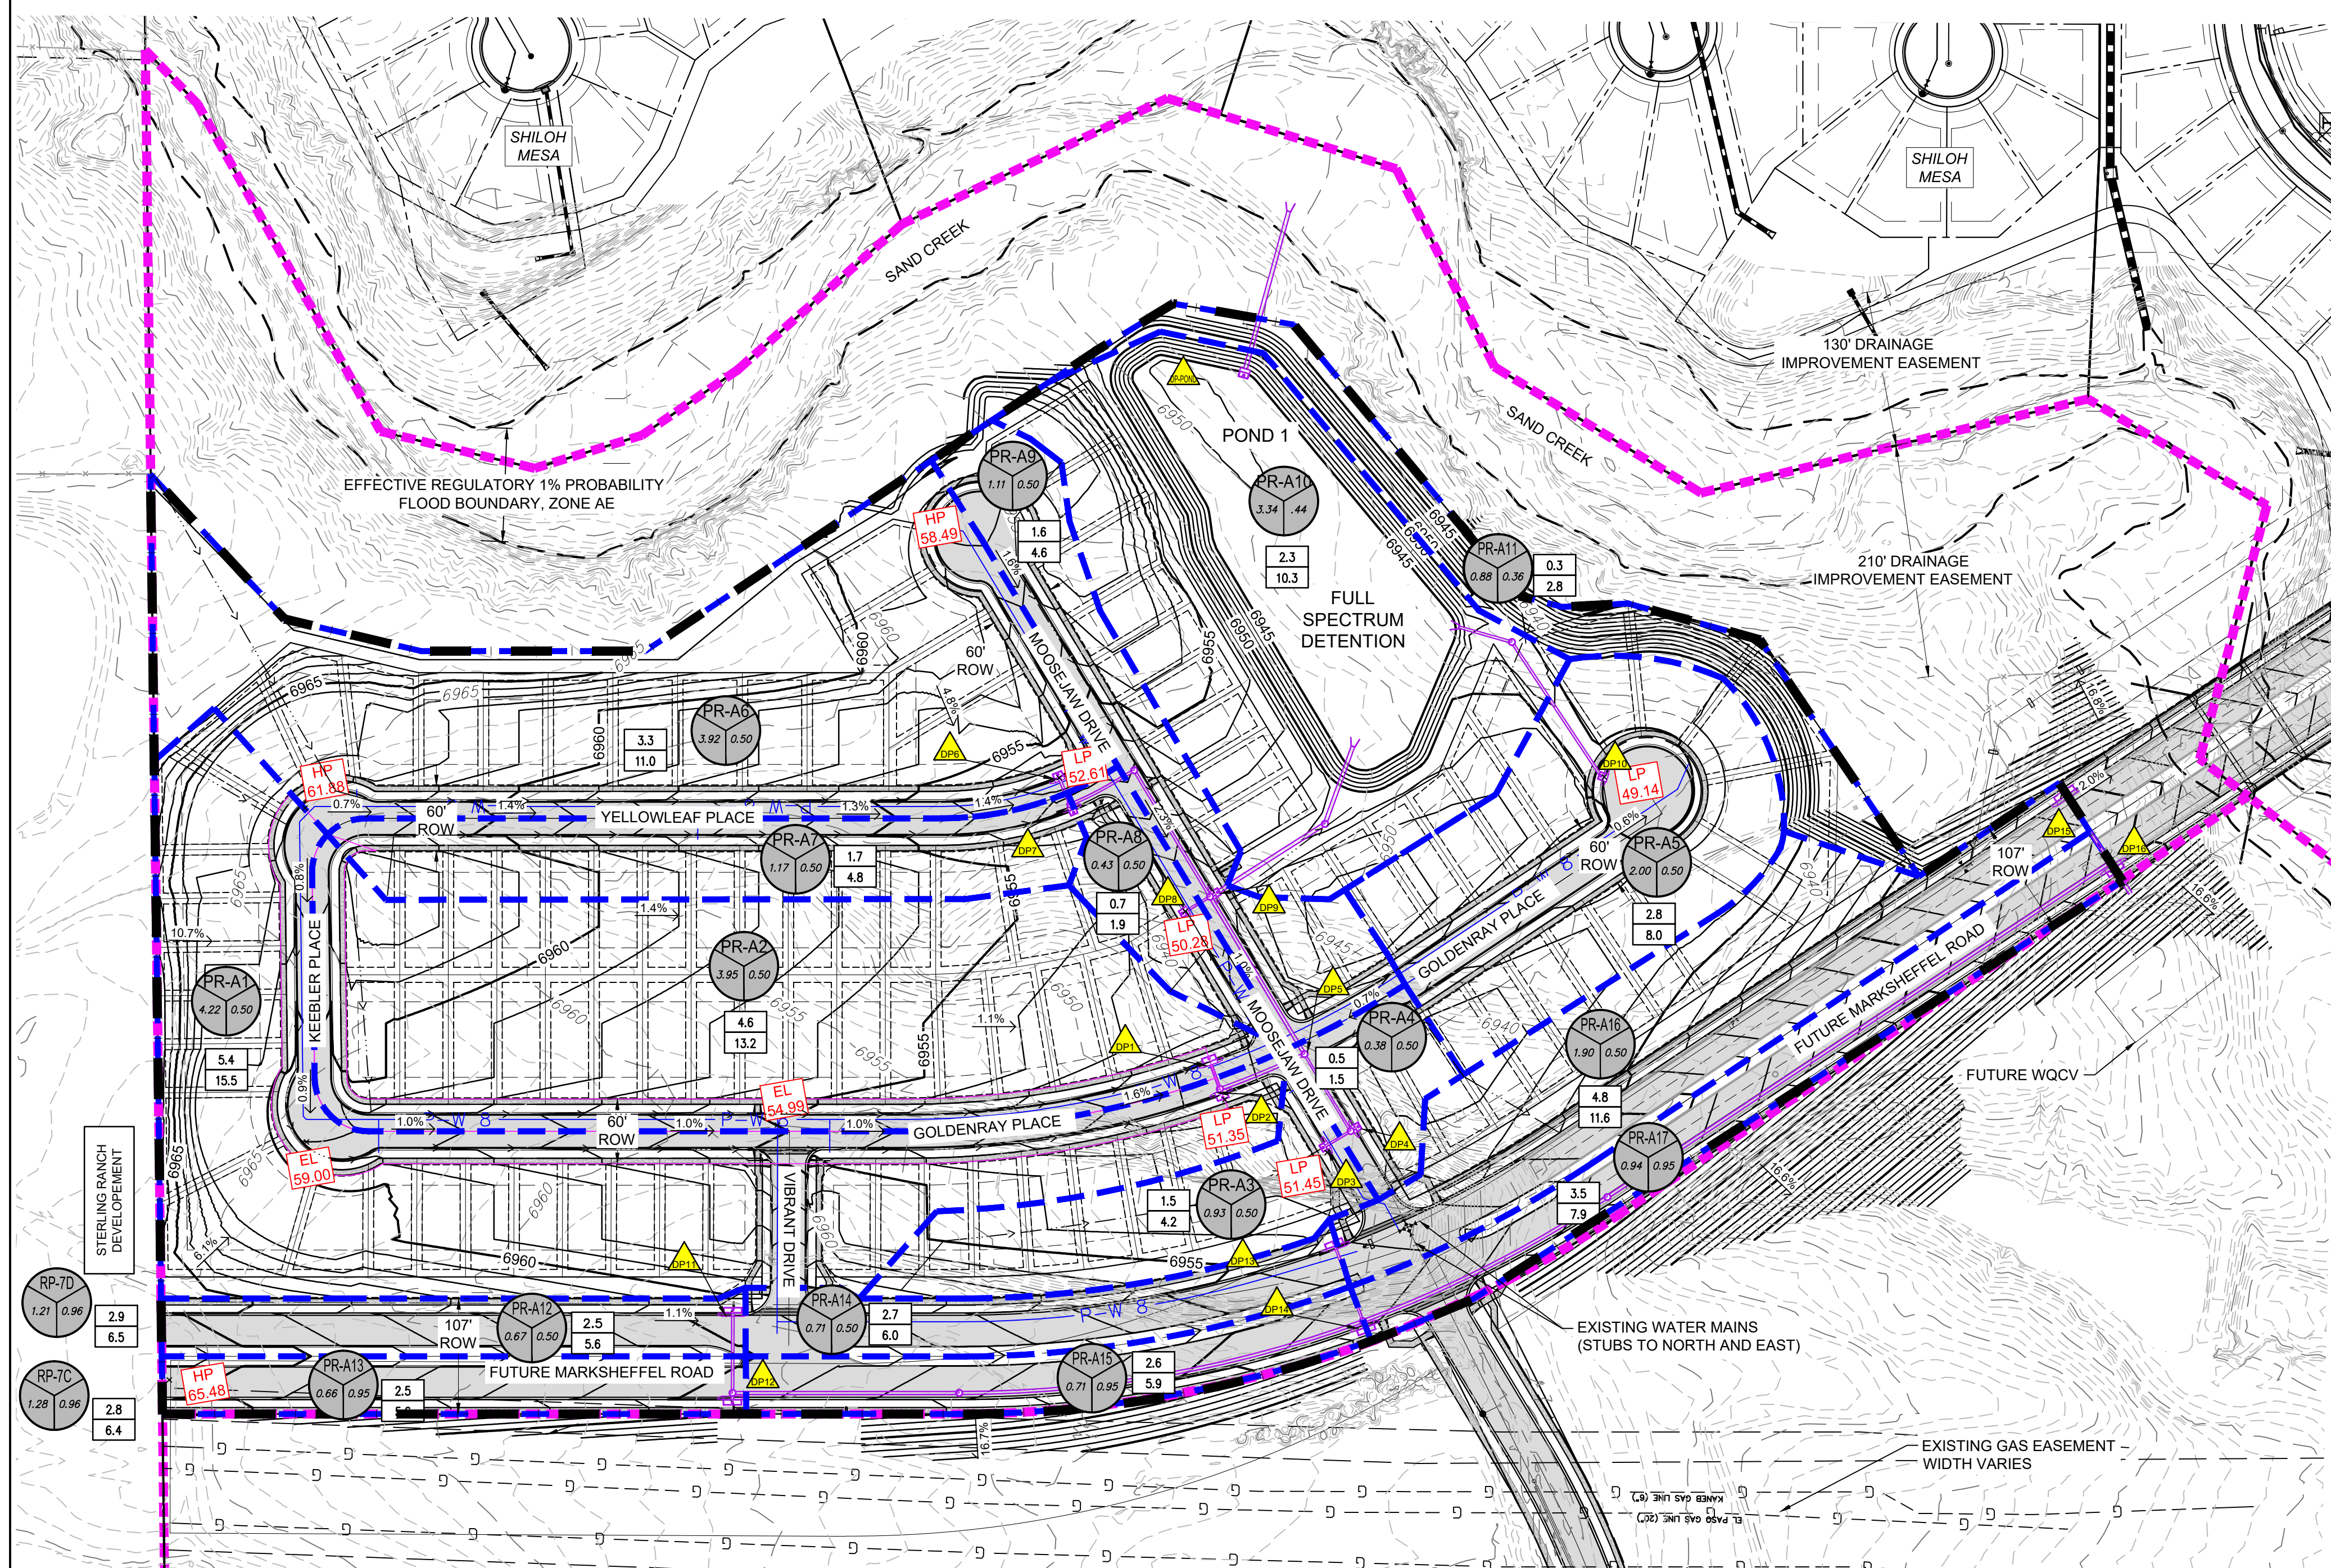

NOTES:  
1. Spot elevations subject to change with final grading design and construction.

### LEGEND


- SUB-BASIN BOUNDARY
- EXISTING CONTOUR
- PROPOSED CONTOUR
- FLOW DIRECTION
- LOW POINT AND ELEVATION
- HIGH POINT AND ELEVATION
- SPOT ELEVATION
- SWALE
- DESIGN POINT
- SUB BASIN DESIGNATION
- SUB BASIN RUNOFF COEFFICIENT
- SUB BASIN AREA (AC.)
- 5-YEAR STORM EVENT PEAK FLOW (CFS)
- 100-YEAR STORM EVENT PEAK FLOW (CFS)
- PROPERTY LINE
- STORM PIPE

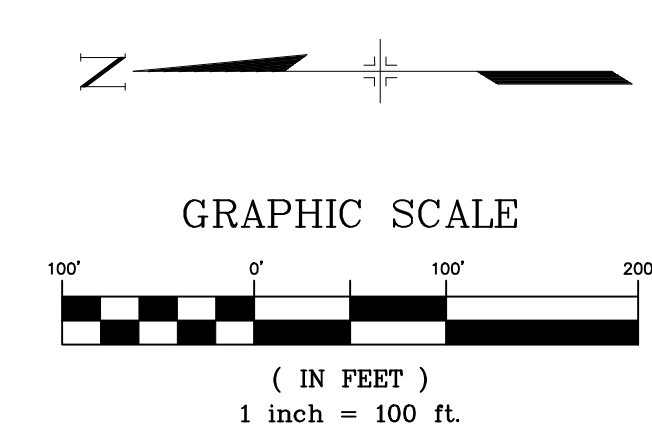




**APPENDIX E**  
**DRAINAGE MAPS**



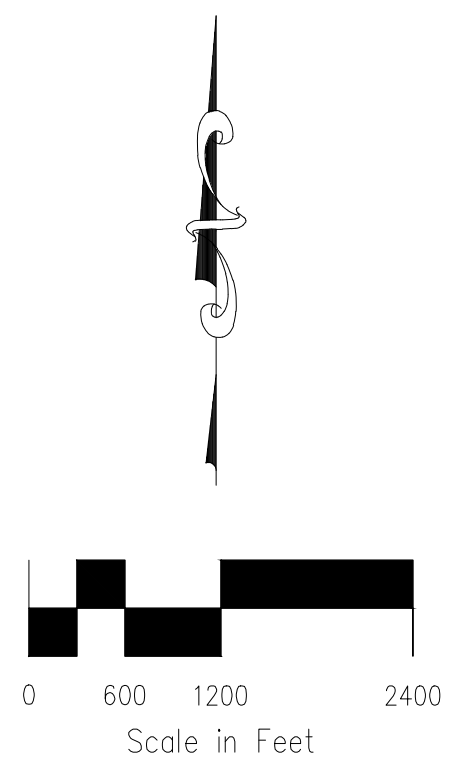

**LEGEND**

- BASIN ID - SC3-77
- DESIGN POINT - 87
- REACH IDENTIFIER - RT-17A
- BASIN BOUNDARY - - - - -
- EAST FORK SAND CREEK - - - - -
- BASIN BOUNDARY - - - - -
- FLOW DIRECTION - >>>

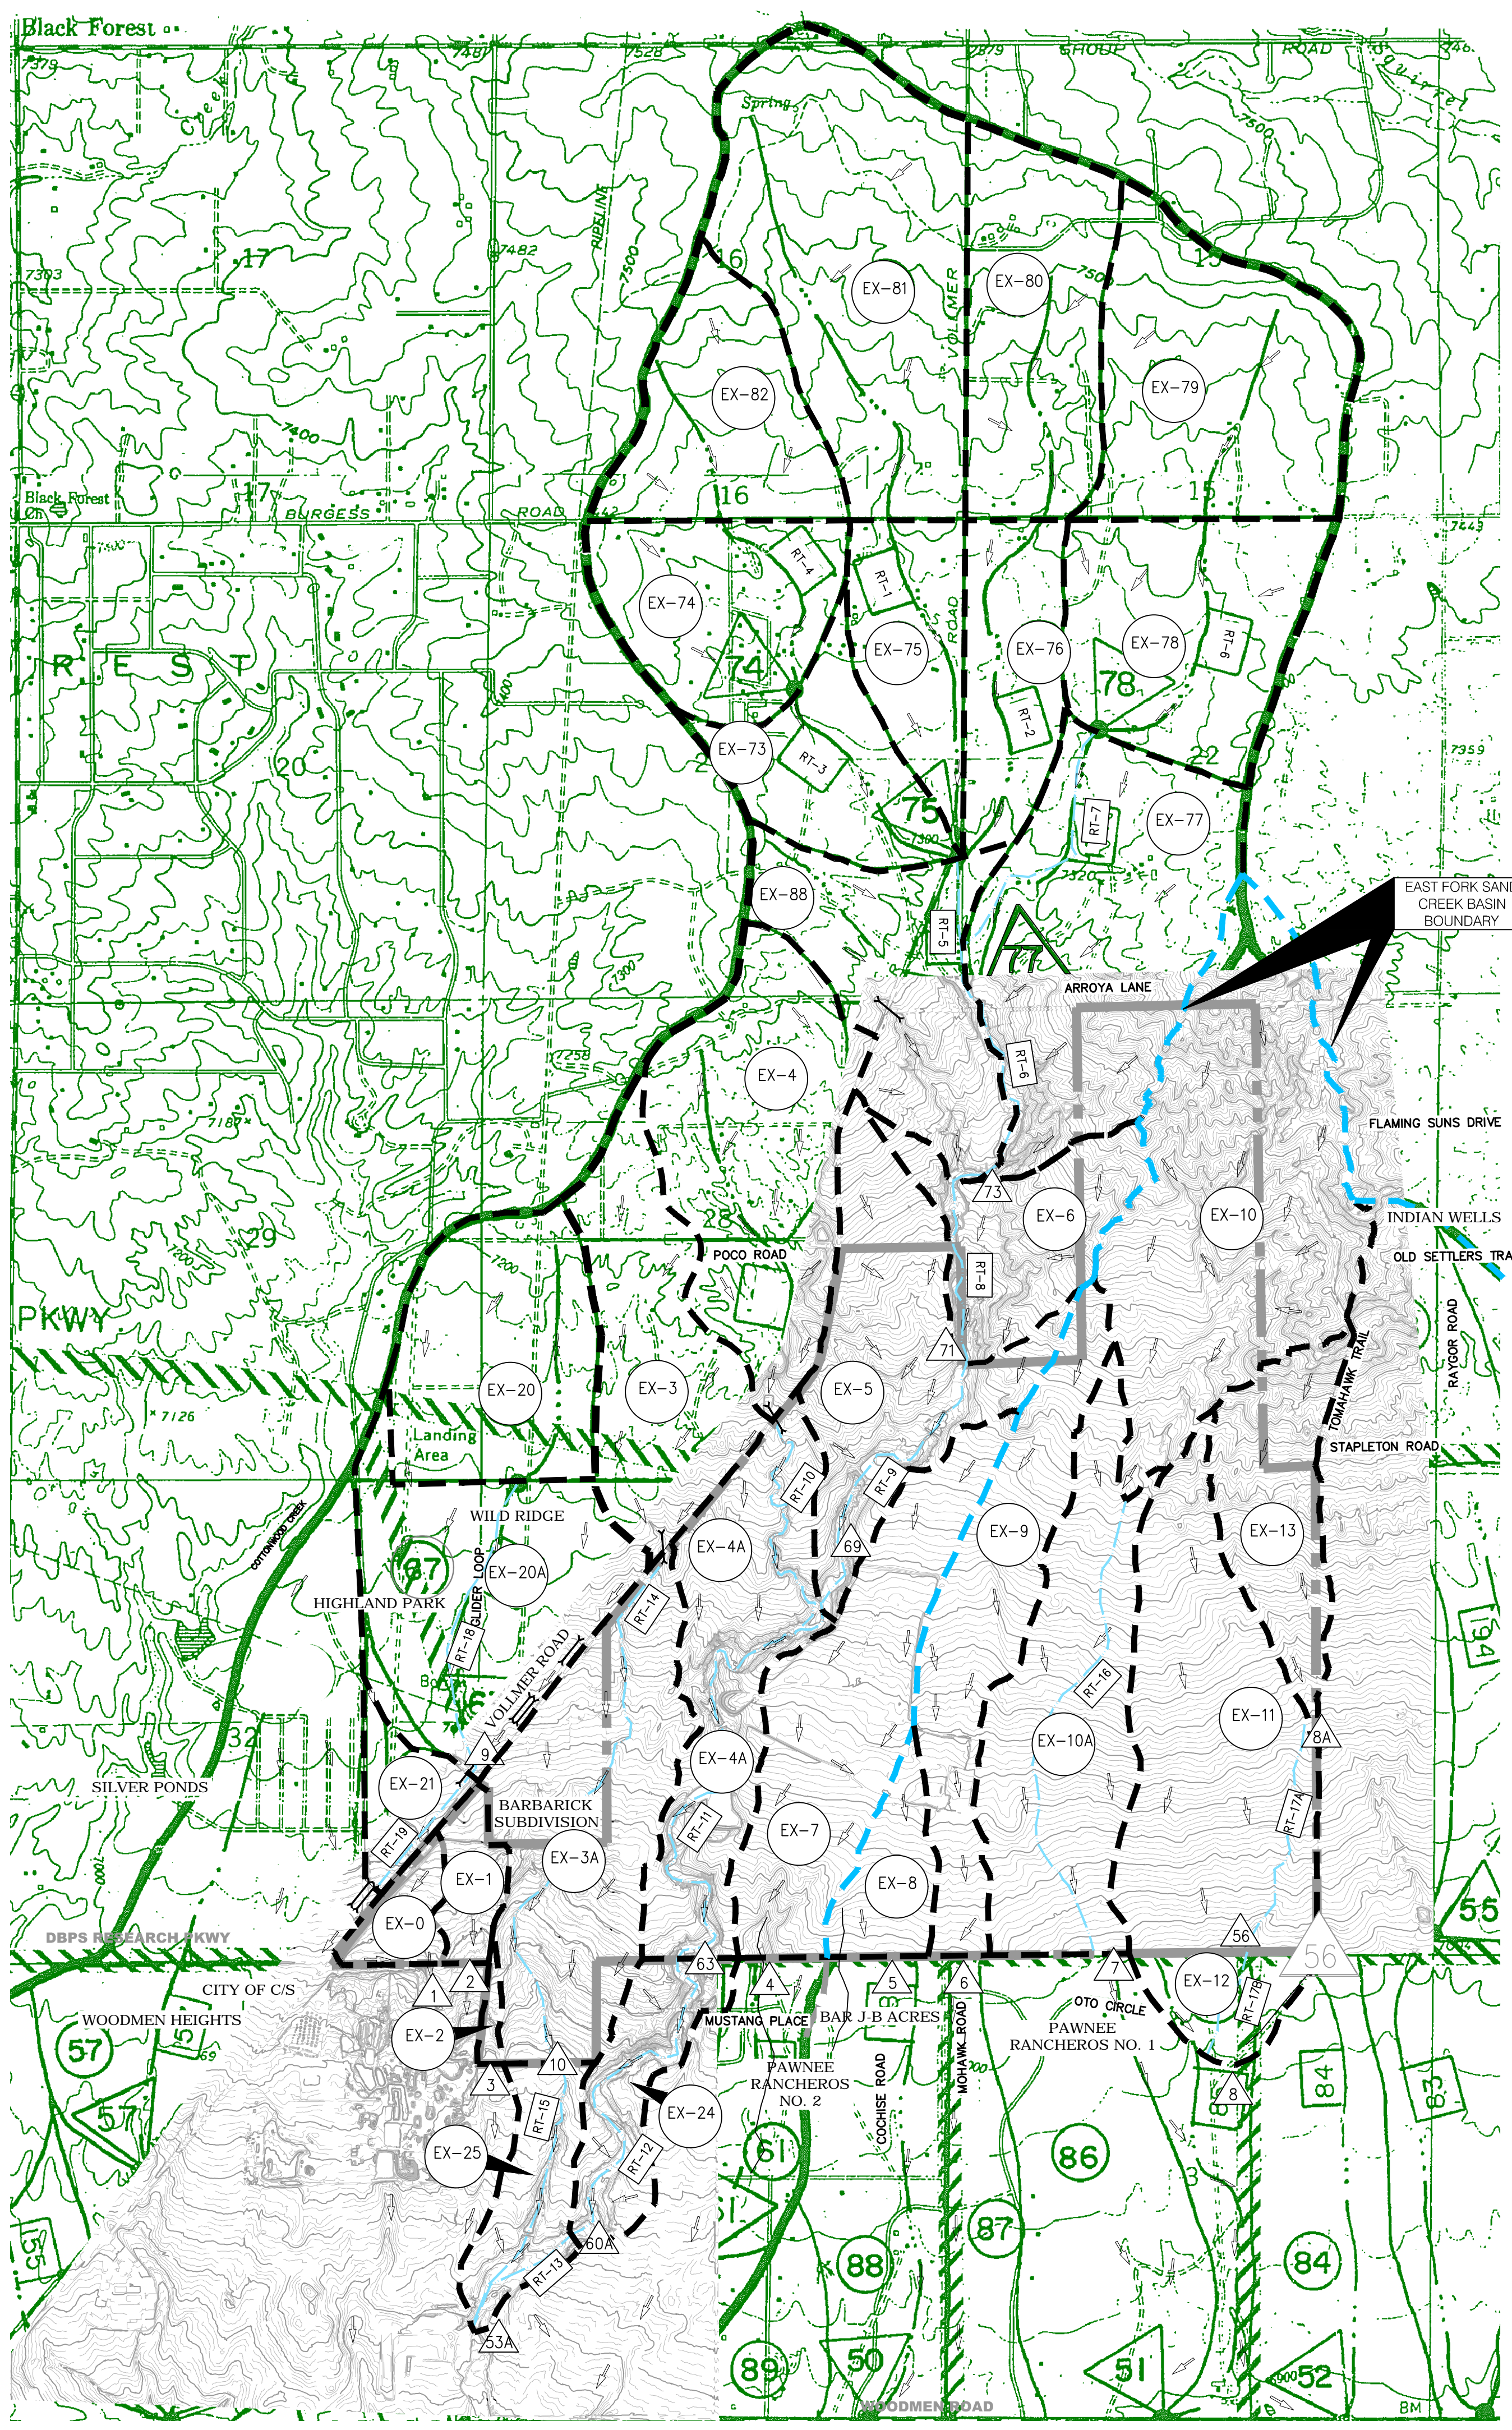

| BASIN SUMMARY |    |              |              |                      |                      |                       |                       |                       |                        |
|---------------|----|--------------|--------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| BASIN         | CN | AREA (ACRES) | AREA (SQ MI) | Q <sub>2</sub> (CFS) | Q <sub>5</sub> (CFS) | Q <sub>10</sub> (CFS) | Q <sub>25</sub> (CFS) | Q <sub>50</sub> (CFS) | Q <sub>100</sub> (CFS) |
| EX-0          | 62 | 23.8         | 0.037        | 5.0                  | 8.2                  | 13.0                  | 19.6                  | 25.7                  | 32.2                   |
| EX-1          | 62 | 25.7         | 0.040        | 4.8                  | 7.9                  | 12.4                  | 18.7                  | 24.5                  | 30.9                   |
| EX-2          | 62 | 5.5          | 0.009        | 1.1                  | 1.8                  | 2.8                   | 4.3                   | 5.6                   | 7.1                    |
| EX-3          | 62 | 136.8        | 0.214        | 22.0                 | 36.4                 | 57.6                  | 86.9                  | 114.0                 | 143.1                  |
| EX-3A         | 61 | 188.1        | 0.294        | 28.3                 | 47.4                 | 75.7                  | 115.1                 | 152.2                 | 192.6                  |
| EX-4          | 62 | 192.0        | 0.300        | 30.1                 | 49.9                 | 79.1                  | 119.5                 | 157.0                 | 197.3                  |
| EX-4A         | 62 | 151.5        | 0.237        | 24.7                 | 40.8                 | 64.4                  | 97.0                  | 127.2                 | 160.1                  |
| EX-5          | 62 | 153.9        | 0.240        | 24.2                 | 40.0                 | 63.4                  | 95.9                  | 125.9                 | 158.2                  |
| EX-6          | 62 | 90.2         | 0.141        | 15.3                 | 25.5                 | 40.1                  | 60.7                  | 79.9                  | 100.5                  |
| EX-7          | 56 | 165.0        | 0.258        | 11.6                 | 21.5                 | 37.5                  | 60.9                  | 83.1                  | 107.4                  |
| EX-8          | 45 | 42.0         | 0.066        | 0.5                  | 1.7                  | 4.5                   | 9.4                   | 14.5                  | 20.5                   |
| EX-9          | 54 | 131.9        | 0.206        | 12.2                 | 23.9                 | 43.1                  | 70.9                  | 97.0                  | 125.2                  |
| EX-10         | 60 | 270.7        | 0.423        | 32.7                 | 56.0                 | 91.1                  | 140.1                 | 185.9                 | 236.1                  |
| EX-10A        | 41 | 179.3        | 0.280        | 0.6                  | 2.2                  | 7.3                   | 17.4                  | 29.1                  | 43.1                   |
| EX-11         | 43 | 209.3        | 0.327        | 18.0                 | 29.8                 | 47.7                  | 73.4                  | 98.3                  | 126.1                  |
| EX-12         | 51 | 39.5         | 0.062        | 2.2                  | 5.1                  | 10.1                  | 17.7                  | 25.1                  | 33.3                   |
| EX-13         | 55 | 89.3         | 0.139        | 7.7                  | 15.2                 | 27.1                  | 44.2                  | 60.5                  | 78.4                   |
| EX-20         | 62 | 143.4        | 0.224        | 25.4                 | 42.1                 | 66.7                  | 100.7                 | 132.3                 | 166.2                  |
| EX-20A        | 64 | 179.7        | 0.281        | 32.2                 | 51.9                 | 80.5                  | 119.8                 | 155.9                 | 194.6                  |
| EX-21         | 65 | 33.3         | 0.052        | 8.6                  | 13.5                 | 20.7                  | 30.5                  | 39.4                  | 49.0                   |
| EX-24         | 59 | 63.1         | 0.099        | 9.5                  | 16.6                 | 27.5                  | 42.9                  | 57.4                  | 73.0                   |
| EX-25         | 43 | 54.4         | 0.085        | 0.3                  | 1.5                  | 4.8                   | 10.7                  | 17.2                  | 25.1                   |
| EX-73         | 63 | 90.0         | 0.141        | 16.4                 | 26.4                 | 41.3                  | 62.1                  | 81.3                  | 102.0                  |
| EX-74         | 63 | 119.7        | 0.187        | 22.3                 | 36.5                 | 57.3                  | 85.9                  | 112.3                 | 140.7                  |
| EX-75         | 63 | 79.3         | 0.124        | 13.1                 | 21.5                 | 33.7                  | 50.5                  | 66.1                  | 82.8                   |
| EX-76         | 63 | 86.4         | 0.135        | 14.2                 | 23.1                 | 36.4                  | 54.6                  | 71.4                  | 89.6                   |
| EX-77         | 62 | 230.6        | 0.360        | 34.7                 | 56.9                 | 90.6                  | 137.5                 | 180.9                 | 227.7                  |
| EX-78         | 63 | 155.6        | 0.243        | 28.1                 | 45.3                 | 70.6                  | 106.2                 | 139.1                 | 174.5                  |
| EX-79         | 63 | 189.0        | 0.295        | 34.9                 | 57.0                 | 89.5                  | 134.3                 | 175.6                 | 220.1                  |
| EX-80         | 63 | 147.7        | 0.231        | 27.3                 | 44.3                 | 69.6                  | 104.5                 | 136.8                 | 171.4                  |
| EX-81         | 62 | 262.9        | 0.411        | 42.6                 | 70.2                 | 111.0                 | 167.4                 | 219.6                 | 275.7                  |
| EX-82         | 62 | 117.8        | 0.184        | 20.0                 | 33.2                 | 52.8                  | 80.0                  | 105.1                 | 132.3                  |
| EX-88         | 62 | 139.2        | 0.217        | 22.2                 | 36.7                 | 58.0                  | 87.6                  | 115.0                 | 144.4                  |

| DESIGN POINT SUMMARY (PEAK FLOW) |              |                      |                      |                       |                       |                       |                        |
|----------------------------------|--------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| DESIGN POINT                     | AREA (SQ MI) | Q <sub>2</sub> (CFS) | Q <sub>5</sub> (CFS) | Q <sub>10</sub> (CFS) | Q <sub>25</sub> (CFS) | Q <sub>50</sub> (CFS) | Q <sub>100</sub> (CFS) |
| DP-74                            | 0.371        | 39.3                 | 65.3                 | 104.8                 | 158.9                 | 209.1                 | 262.8                  |
| DP-75                            | 1.413        | 141.2                | 235.1                | 376.6                 | 566.6                 | 750.9                 | 950.5                  |
| DP-78                            | 0.538        | 59.7                 | 98.4                 | 154.0                 | 232.6                 | 306.2                 | 385.3                  |
| DP-73                            | 2.528        | 225.9                | 380.7                | 618.0                 | 957.0                 | 1260.4                | 1582.3                 |
| DP-71                            | 2.669        | 229.3                | 388.9                | 629.7                 | 978.8                 | 1277.3                | 1637.9                 |
| DP-69                            | 3.209        | 253.0                | 434.8                | 707.7                 | 1100.0                | 1453.3                | 1870.4                 |
| DP-63                            | 3.446        | 251.4                | 430.7                | 713.1                 | 1113.2                | 1496.2                | 1911.5                 |
| DP-10                            | 0.508        | 36.5                 | 56.0                 | 106.4                 | 162.9                 | 220.6                 | 287.2                  |
| DP-9A                            | 0.557        | 55.3                 | 94.3                 | 150.3                 | 227.7                 | 299.5                 | 380.5                  |
| DP-9                             | 0.505        | 52.8                 | 88.8                 | 142.1                 | 214.2                 | 281.0                 | 351.4                  |
| DP-8A                            | 0.139        | 7.7                  | 15.2                 | 27.1                  | 44.2                  | 60.5                  | 78.4                   |
| DP-8                             | 0.528        | 24.2                 | 45.1                 | 77.8                  | 124.4                 | 169.5                 | 220.9                  |
| DP-7                             | 0.703        | 32.4                 | 57.1                 | 97.3                  | 156.1                 | 213.8                 | 277.9                  |
| DP-6                             | 0.206        | 12.2                 | 23.9                 | 43.1                  | 70.9                  | 97.0                  | 125.2                  |
| DP-5                             | 0.066        | 0.5                  | 1.7                  | 4.5                   | 9.4                   | 14.5                  | 20.5                   |
| DP-4                             | 0.258        | 11.6                 | 21.5                 | 37.5                  | 60.9                  | 83.1                  | 107.4                  |
| DP-3                             | 0.009        | 1.1                  | 1.8                  | 2.8                   | 4.3                   | 5.6                   | 7.1                    |
| DP-2                             | 0.040        | 4.8                  | 7.9                  | 12.4                  | 18.7                  | 24.5                  | 30.9                   |
| DP-1                             | 0.037        | 5.0                  | 8.2                  | 13.0                  | 19.6                  | 25.7                  | 32.2                   |
| DP-60A                           | 3.545        | 247.7                | 430.2                | 707.1                 | 1113.0                | 1496.6                | 1913.5                 |
| DP-56                            | 0.466        | 23.2                 | 42.5                 | 71.9                  | 115.6                 | 157.4                 | 202.9                  |
| DP-53A                           | 4.138        | 262.1                | 454.0                | 763.2                 | 1196.5                | 1609.8                | 2061.5                 |

| DESIGN POINT SUMMARY (VOLUME) |              |                        |                        |                         |                         |                         |                          |
|-------------------------------|--------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|--------------------------|
| DESIGN POINT                  | AREA (SQ MI) | V <sub>2</sub> (AC-FT) | V <sub>5</sub> (AC-FT) | V <sub>10</sub> (AC-FT) | V <sub>25</sub> (AC-FT) | V <sub>50</sub> (AC-FT) | V <sub>100</sub> (AC-FT) |
| DP-74                         | 0.371        | 5.9                    | 9.0                    | 13.6                    | 19.8                    | 25.5                    | 31.6                     |
| DP-75                         | 1.413        | 22.7                   | 34.5                   | 51.7                    | 75.4                    | 97.1                    | 120.5                    |
| DP-78                         | 0.538        | 8.9                    | 13.5                   | 20.1                    | 29.3                    | 37.7                    | 46.7                     |
| DP-73                         | 2.528        | 40.4                   | 61.5                   | 92.1                    | 134.3                   | 173.1                   | 214.9                    |
| DP-71                         | 2.669        | 42.5                   | 64.9                   | 97.1                    | 141.6                   | 182.5                   | 226.6                    |
| DP-69                         | 3.209        | 50.7                   | 77.4                   | 116.1                   | 169.4                   | 216.6                   | 271.4                    |
| DP-63                         | 3.446        | 54.1                   | 82.5                   | 123.8                   | 180.8                   | 233.3                   | 289.9                    |
| DP-10                         | 0.508        | 7.6                    | 11.7                   | 17.6                    | 25.8                    | 33.4                    | 41.6                     |
| DP-9A                         | 0.557        | 9.3                    | 14.1                   | 21.1                    | 30.7                    | 39.4                    | 48.8                     |
| DP-9                          | 0.505        | 8.4                    | 12.7                   | 19.0                    | 27.6                    | 35.5                    | 44.0                     |
| DP-8A                         | 0.139        | 1.3                    | 2.1                    | 3.4                     | 5.2                     | 7.0                     | 8.9                      |
| DP-8                          | 0.528        | 4.4                    | 7.0                    | 11.1                    | 16.8                    | 22.3                    | 28.4                     |
| DP-7                          | 0.703        | 6.1                    | 10.0                   | 15.9                    | 24.3                    | 32.4                    | 41.3                     |
| DP-6                          | 0.206        | 2.4                    | 4.0                    | 6.3                     | 9.6                     | 12.7                    | 16.0                     |
| DP-5                          | 0.066        | 0.2                    | 0.4                    | 0.8                     | 1.4                     | 1.9                     | 2.6                      |
| DP-4                          | 0.258        | 2.6                    | 4.2                    | 6.7                     | 10.2                    | 13.5                    | 17.2                     |
| DP-3                          | 0.009        | 0.1                    | 0.2                    | 0.3                     | 0.5                     | 0.6                     | 0.8                      |
| DP-2                          | 0.040        | 0.6                    | 0.9                    | 1.4                     | 2.1                     | 2.7                     | 3.4                      |
| DP-1                          | 0.037        | 0.6                    | 0.9                    | 1.3                     | 1.9                     | 2.5                     | 3.1                      |
| DP-60A                        | 3.545        | 55.3                   | 84.4                   | 126.4                   | 184.8                   | 238.5                   | 296.6                    |
| DP-56                         | 0.466        | 4.0                    | 6.3                    | 9.9                     | 14.9                    | 19.8                    | 25.1                     |
| DP-53A                        | 4.138        | 63.0                   | 96.4                   | 144.7                   | 211.8                   | 273.9                   | 340.9                    |

| EFCS DBPS DESIGN POINT SUMMARY (PEAK FLOW) |              |                      |                        |
|--|--------------|----------------------|------------------------|
| DBPS DESIGN POINT                          | AREA (SQ MI) | Q <sub>2</sub> (CFS) | Q <sub>100</sub> (CFS) |
| DP-50                                      | 0.32         | 47.0                 | 195.7                  |
| DP-51 (BASIN 86)                           | 0.33         | 17.7                 | 74.1                   |
| DP-52                                      | 1.67         | 80.5                 | 456.5                  |
| DP-56                                      | 0.79         | 63.6                 | 265.0                  |

Values reported from SCDBPS  
 (DP 50, 51, 52 Not analyzed as a part of this study)  
 DBPS Reach 85(Basin#1)=Q10=28.8cfs Q100=115.2cfs

**M&S**  
 CIVIL CONSULTANTS, INC.  
 20 BOULDER CRESCENT, SUITE 110  
 COLORADO SPRINGS, CO 80903  
 PHONE: 719.955.5485

2018 STERLING RANCH MDDP  
 EXISTING HYDROLOGIC CONDITIONS MAP

PROJECT NO. 09-002 FILE: \\dmg\Eng Exhibits\2018-MDDP-ExistCondWS\Map.dwg

DESIGNED BY: DLM SCALE: DATE: 08-22-18  
 DRAWN BY: DLM HORIZ: NTS  
 CHECKED BY: VAS VERT: NTS

DM1


File: c:\09002A\Sterling Ranch - District\Eng Exhibits\2018-MDDP-ExistCondWS\Map.dwg Plotstamp: 11/13/2018 1:52 PM

FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES  
 FOR BURIED UTILITY INFORMATION 48 HRS BEFORE YOU DIG CALL 1-800-922-1987




| Proposed Conditions Design Point Summary |                      |                      |                       |                       |                       |                        |
|--|----------------------|----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Design Point                             | Q <sub>2</sub> (cfs) | Q <sub>5</sub> (cfs) | Q <sub>10</sub> (cfs) | Q <sub>25</sub> (cfs) | Q <sub>50</sub> (cfs) | Q <sub>100</sub> (cfs) |
| DP-74                                    | 33.68                | 94.55                | 145.74                | 187.2                 | 251.03                | 293.76                 |
| DP-75                                    | 95.13                | 274.57               | 427.98                | 555.2                 | 754.29                | 887.87                 |
| DP-76                                    | 144.08               | 426.57               | 672.84                | 877.81                | 1201.19               | 1423.89                |
| DP-78                                    | 52.82                | 138.33               | 210.37                | 269.64                | 360.98                | 422.09                 |
| DP-73                                    | 147.29               | 442.62               | 702.56                | 919.74                | 1257.44               | 1497.12                |
| DP-72                                    | 148.04               | 450.6                | 718.24                | 939.53                | 1285.42               | 1527.19                |
| DP-71                                    | 154.76               | 475.49               | 773.89                | 1022.86               | 1389.51               | 1642.96                |
| DP-70                                    | 155.07               | 480.21               | 783.11                | 1035.54               | 1408.68               | 1665.91                |
| DP-69                                    | 158.17               | 521.37               | 855.08                | 1134.95               | 1532.12               | 1795.11                |
| DP-87                                    | 151.73               | 531.49               | 884.92                | 1181.68               | 1613.16               | 1903.95                |
| DP-68                                    | 101.57               | 467.33               | 897.95                | 1286.67               | 1785.56               | 2095.47                |
| DP-64                                    | 91.34                | 135.67               | 170.56                | 198.05                | 238.16                | 264.76                 |
| DP-63                                    | 136.83               | 404.27               | 684.34                | 940.16                | 1293.98               | 1554.73                |
| DP-61                                    | 140.26               | 448.63               | 758.6                 | 1042.07               | 1451.8                | 1816.26                |
| DP-60A                                   | 150.16               | 456.15               | 769.88                | 1056.06               | 1471.37               | 1839.17                |
| DP-53A                                   | 150.2                | 456.7                | 772.23                | 1058.86               | 1474.82               | 1843.8                 |
| DP-1E                                    | 12.41                | 29.33                | 43.32                 | 54.71                 | 72.19                 | 83.88                  |
| DP-2E                                    | 25                   | 56.23                | 82.03                 | 103.33                | 135.61                | 157.53                 |
| DP-3E                                    | 28                   | 60.94                | 88.92                 | 116.05                | 175.35                | 221.76                 |
| DP-4E                                    | 29.8                 | 64.13                | 93.94                 | 122.72                | 184.86                | 230.91                 |
| DP-5E                                    | 25.44                | 46.04                | 68.38                 | 85.35                 | 124.7                 | 145.69                 |
| DP-8                                     | 27.54                | 49.4                 | 72.24                 | 90.17                 | 125.47                | 147.14                 |
| DP-21                                    | 84.32                | 145.61               | 175.84                | 176.17                | 176.17                | 176.17                 |
| DP-22                                    | 65.06                | 126.55               | 156.5                 | 156.5                 | 156.5                 | 156.5                  |
| DP-25                                    | 5.58                 | 12.02                | 17.2                  | 21.1                  | 26.97                 | 30.9                   |
| DP-26                                    | 0.74                 | 9.32                 | 19.8                  | 32.37                 | 53.15                 | 68.04                  |
| EX STOCK POND 1                          | 141.53               | 512.56               | 860.4                 | 1154.93               | 1590.6                | 1874.89                |
| EX STOCK POND 2                          | 155.07               | 480.21               | 783.11                | 1035.54               | 1408.68               | 1665.91                |
| PND1E7                                   | 33.49                | 70.68                | 103.63                | 134.94                | 212.81                | 269.11                 |
| PNDW3                                    | 101.57               | 467.33               | 897.95                | 1286.68               | 1785.56               | 2095.47                |
| PNDW3_OUTLET                             | 101.57               | 398.7                | 676.7                 | 931.2                 | 1282.89               | 1486.6                 |

| Proposed Conditions Basin Summary |                      |                      |                       |                       |                       |                        |
|-----------------------------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Basin                             | Q <sub>2</sub> (cfs) | Q <sub>5</sub> (cfs) | Q <sub>10</sub> (cfs) | Q <sub>25</sub> (cfs) | Q <sub>50</sub> (cfs) | Q <sub>100</sub> (cfs) |
| SC3-1A                            | 15.4                 | 32.05                | 44.63                 | 54.22                 | 68.02                 | 77.21                  |
| SC3-5A                            | 48.38                | 75.1                 | 95.88                 | 112.35                | 135.5                 | 150.82                 |
| SC3-5B                            | 60.26                | 97.13                | 126.36                | 149                   | 181.48                | 203.13                 |
| SC3-6A                            | 59.98                | 84.21                | 106.32                | 123.77                | 149.06                | 165.69                 |
| SC3-6B                            | 31.63                | 49.78                | 63.88                 | 74.85                 | 90.7                  | 101.25                 |
| SC3-6C                            | 52.26                | 84.02                | 115.61                | 140.03                | 174.32                | 196.64                 |
| SC3-7                             | 60.94                | 87.91                | 109.28                | 126.05                | 150.45                | 166.71                 |
| SC3-8                             | 12.18                | 56.41                | 93.96                 | 122.75                | 166.13                | 195.44                 |
| SC3-9                             | 24.66                | 73.44                | 114.01                | 146.06                | 193.77                | 225.81                 |
| SC3-10                            | 2.94                 | 14.36                | 23.62                 | 30.77                 | 41.33                 | 48.66                  |
| SC3-11A                           | 1.99                 | 5.36                 | 8.05                  | 10.06                 | 13.08                 | 15.09                  |
| SC3-11B                           | 79.84                | 116.98               | 148.27                | 172.72                | 208.2                 | 231.81                 |
| SC3-12                            | 47.61                | 71.53                | 91.34                 | 106.54                | 129.44                | 144.67                 |
| SC3-12A                           | 15.01                | 24.03                | 31.22                 | 36.66                 | 44.86                 | 50.3                   |
| SC3-12B                           | 1.38                 | 4.03                 | 6.23                  | 8.01                  | 10.7                  | 12.51                  |
| SC3-13                            | 56.24                | 80.96                | 100.72                | 115.86                | 138.53                | 153.6                  |
| SC3-13A                           | 2.61                 | 7.62                 | 11.81                 | 15.18                 | 20.28                 | 23.7                   |
| SC3-14A                           | 137.91               | 201.61               | 260.35                | 307.16                | 373.37                | 417.25                 |
| SC3-14B                           | 77.46                | 109.84               | 139.54                | 162.93                | 196.7                 | 218.85                 |
| SC3-15A                           | 13.21                | 38.41                | 59.28                 | 76.32                 | 102.43                | 119.88                 |
| SC3-15B                           | 8.38                 | 12.29                | 15.45                 | 17.9                  | 21.56                 | 24                     |
| SC3-16A                           | 206.37               | 292.54               | 371.39                | 434.23                | 523.16                | 582.23                 |
| SC3-16B                           | 60.38                | 82.91                | 103.49                | 119.96                | 143.94                | 159.74                 |
| SC3-17A                           | 27.45                | 42.18                | 54.03                 | 63.03                 | 76.6                  | 85.6                   |
| SC3-17B                           | 34.53                | 50.54                | 63.5                  | 73.46                 | 88.39                 | 98.33                  |
| SC3-18                            | 22.75                | 32.96                | 41.34                 | 47.83                 | 57.56                 | 64.05                  |
| SC3-18B                           | 1.53                 | 4.45                 | 6.89                  | 8.86                  | 11.91                 | 13.95                  |
| SC3-19                            | 28                   | 78.96                | 120.84                | 154.22                | 205.45                | 239.67                 |
| SC3-20                            | 9.29                 | 21.02                | 30.73                 | 38.5                  | 50.17                 | 57.99                  |
| SC3-21                            | 9.77                 | 20.68                | 29.45                 | 36.03                 | 45.92                 | 52.53                  |
| SC3-22                            | 7.15                 | 16.35                | 24.05                 | 30.08                 | 39.14                 | 45.22                  |
| SC3-23                            | 10.92                | 22.1                 | 31.23                 | 38.2                  | 48.72                 | 55.73                  |
| SC3-24A                           | 6.43                 | 15.26                | 22.51                 | 28.3                  | 37.09                 | 42.98                  |
| SC3-24B                           | 1.95                 | 4.78                 | 7.12                  | 8.98                  | 11.76                 | 13.62                  |
| SC3-25                            | 5.58                 | 12.02                | 17.2                  | 21.1                  | 26.97                 | 30.9                   |
| SC3-26                            | 1.66                 | 4.37                 | 6.61                  | 8.4                   | 11.13                 | 12.95                  |
| SC3-27                            | 14.49                | 27.87                | 39.1                  | 48.09                 | 61.8                  | 70.95                  |
| SC3-61                            | 5.61                 | 22.4                 | 36.4                  | 47.4                  | 63.67                 | 74.61                  |
| SC3-72                            | 9.55                 | 23.84                | 35.61                 | 44.98                 | 59.19                 | 68.7                   |
| SC3-73                            | 12.16                | 33.03                | 50.14                 | 63.84                 | 84.94                 | 99.04                  |
| SC3-74                            | 22.51                | 53.27                | 79.1                  | 99.77                 | 131.03                | 151.94                 |
| SC3-75                            | 11.12                | 26.37                | 38.98                 | 49.21                 | 64.91                 | 75.41                  |
| SC3-76                            | 10.85                | 27.09                | 40.54                 | 51.45                 | 68.18                 | 79.38                  |
| SC3-77                            | 8.93                 | 27.11                | 42.16                 | 54.46                 | 73.59                 | 86.36                  |
| SC3-78                            | 32.29                | 77.46                | 114.83                | 144.42                | 189.21                | 219.17                 |
| SC3-79                            | 32.26                | 82.54                | 123.52                | 156.01                | 205.95                | 239.34                 |
| SC3-80                            | 22.36                | 57.34                | 86.09                 | 109.14                | 144.5                 | 168.15                 |
| SC3-81                            | 26.67                | 81                   | 125.85                | 162.22                | 218.65                | 256.32                 |
| SC3-82                            | 17.01                | 50.83                | 79.48                 | 102.02                | 136.18                | 158.98                 |
| SC3-88                            | 6.28                 | 18.99                | 29.44                 | 37.84                 | 50.8                  | 59.46                  |
| SC3-89                            | 2.86                 | 8.64                 | 13.39                 | 17.14                 | 22.87                 | 26.69                  |
| SCE-1                             | 9.82                 | 21.3                 | 30.85                 | 38.58                 | 50.51                 | 58.52                  |
| SCE-2                             | 1.42                 | 3.35                 | 4.95                  | 6.27                  | 8.3                   | 9.66                   |
| SCE-3                             | 9.63                 | 19.25                | 28.62                 | 36.11                 | 47.22                 | 54.72                  |
| SCE-4                             | 4.16                 | 7.52                 | 10.35                 | 12.67                 | 16.29                 | 18.71                  |
| SCE-5                             | 95.82                | 133.18               | 168.48                | 197.05                | 238.47                | 265.69                 |
| SCE-6                             | 0.18                 | 0.55                 | 1.03                  | 1.42                  | 2                     | 2.39                   |
| SCE-7                             | 39.33                | 54.94                | 67.52                 | 77.22                 | 91.69                 | 101.34                 |
| SCE-8                             | 47.1                 | 63.37                | 73.41                 | 82.94                 | 97.16                 | 106.61                 |
| SCE-9                             | 0.22                 | 0.68                 | 1.27                  | 1.75                  | 2.46                  | 2.94                   |
| SCE-10                            | 107.37               | 167.39               | 232.98                | 286.58                | 362.01                | 411.15                 |
| SCE-11                            | 0.77                 | 2.52                 | 4.75                  | 6.5                   | 8.93                  | 10.51                  |
| SCE-13                            | 10.9                 | 25.85                | 38.21                 | 48.24                 | 63.64                 | 73.94                  |
| SCE-14                            | 8                    | 19.04                | 28.21                 | 35.59                 | 46.77                 | 54.26                  |
| SCE-15                            | 13.6                 | 27.2                 | 38.53                 | 47.35                 | 60.67                 | 69.54                  |

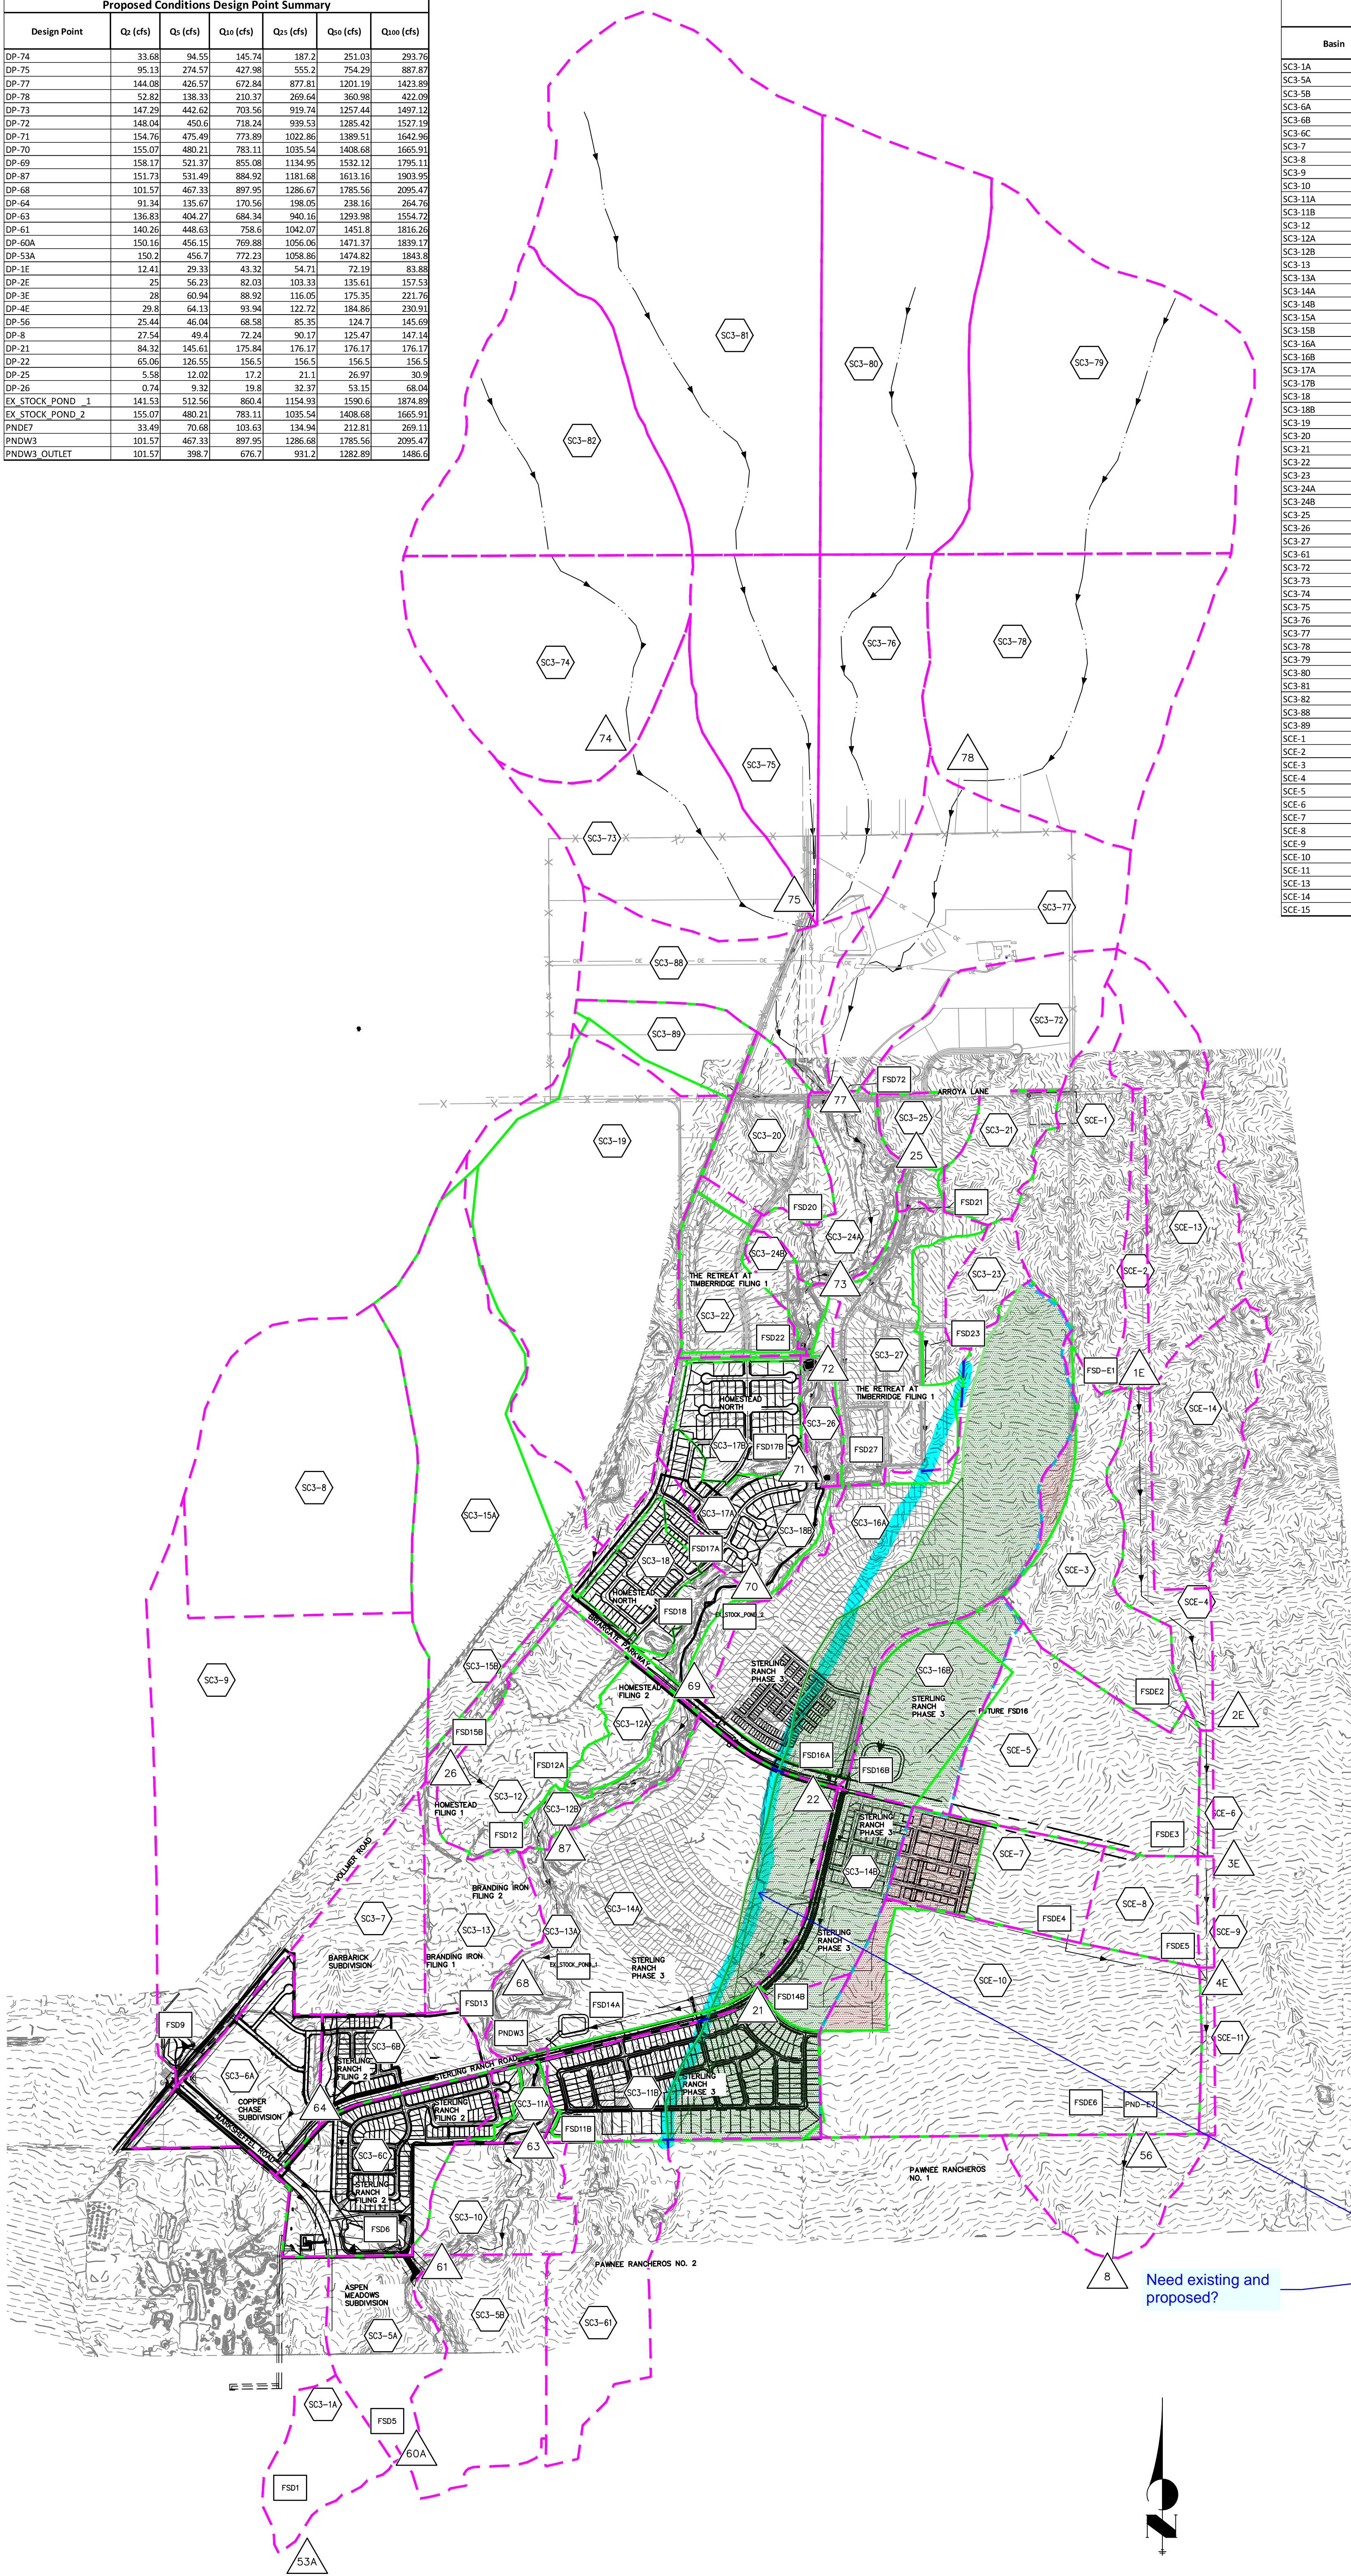

- SWMM BASIN
- SWMM DETENTION POND
- SWMM DESIGN POINT
- PREVIOUS EAST FORK BASIN TRANSFER AREA
- ADDITIONAL EAST FORK BASIN TRANSFER AREA
- EAST FORK BASIN BOUNDARY
- 2018 MDDP DRAINAGE BASIN BOUNDARY
- 2022 MDDP DRAINAGE BASIN BOUNDARY

PROPOSED DRAINAGE MAP  
 SAND CREEK MDDP AMENDMENT  
 JOB NO. 25188.04  
 02/17/22  
 SHEET 1 OF 1

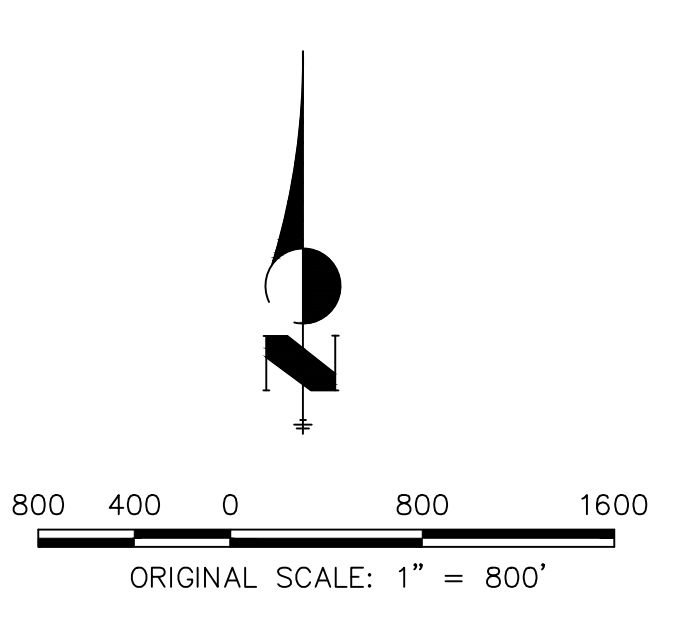

X:\2518804\2518804\SWMM\Map.dwg, Layout1, 4/11/2022, 4:48:46 PM, VaughnD