



Sustainable Traffic Solutions

Joseph L. Henderson PE, PTOE
Traffic Engineer / Principal

September 13, 2024

Emily Hill
Director
Haven School
5484 Burgess Road
Colorado Springs, CO 80908

RE: Responses to Comments on the Traffic Impact Study for the Haven School

Dear Emily,

El Paso County provided comments on the traffic impact study for this project that was dated June 25, 2024. Sustainable Traffic Solutions has responded to the comments as noted below.

Comment 1 Add and compare LOS analysis if lane improvements are not added at Milam and Burgess. (Refers to the Year 2026 traffic conditions.)

Response Refer to Section 5.0.

Comment 2 Discuss if the current peak hour has tripped the needed lane improvements at Milam and Burgess without the school added. Discuss that the Milham and Burgess intersection can operate safely with the school open and the off-site improvements not completed (not including access improvements on Burgess). (Refers to the auxiliary lane review.)

Response Refer to Section 9.0 and Table 4.

Comment 3 Compute the school % ADT impact to the westbound approach to Milam (east leg) and compute the cost share of that % ADT impact to be escrowed for the east leg only. North and south leg will not be escrowed.

Response Refer to Table 1. The school will contribute approximately 2.8% of the traffic on the east leg of the intersection.

Comment 4 note this will be a condition of approval to restrict bus service due to line of sight not able to be met (Refers to Section 10.0.)

Response The school understands this.

Comment 5 etadf

Response Based on email correspondence with Ed Schoenheit, the comment is to be disregarded.


Comment 6 45 mph posted

Emily Hill
September 13, 2024
Page 2

Response The speed limit was changed from 30 MPH to 45 MPH in the VISTRO files.
However, the speed limit is only applicable when analyzing a signalized corridor.
Therefore, it's meaningless for this project.

Please contact me with questions.

Sincerely,

A handwritten signature in blue ink that reads "Joseph L. Henderson". The signature is written in a cursive style and is positioned above the printed name.

Joseph L. Henderson, PE, PTOE
Project Manager / Principal
Haven School TIS Comment Response Letter 9-12-24

Please add certification page with engineer stamp/sign and owner sign.

Traffic Engineer's Statement

The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.

[Name, P.E. # _____]Date

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

[Name, Title]Date
[Business Name]
[Address]

Prepared By:



Sustainable Traffic Solutions, Inc.

<http://www.sustainabletrafficsolutions.com/>

Joseph L. Henderson, PE, PTOE

303.589.6875

joe@sustainabletrafficsolutions.com

Joseph L. Henderson's electronic or digital seal and signature is effective only as to that version of this document as originally published by Joseph L. Henderson. Joseph L. Henderson is not responsible for any subsequent modification, corruption, or unauthorized use of this document. To verify the validity or applicability of the seal and signature, contact Joseph L. Henderson.

Table of Contents

| | Page |
|--|-----------|
| 1.0 Introduction | 1 |
| 2.0 Project Description..... | 2 |
| 2.1 Study Area..... | 2 |
| 2.2 Study Assumptions..... | 2 |
| 3.0 Traffic Count Data | 3 |
| 3.1 Level of Service Analysis..... | 4 |
| 4.0 Site Generated Traffic | 4 |
| 4.1 Trip Generation..... | 4 |
| 5.0 2026 Traffic Conditions..... | 4 |
| 6.0 Year 2045 Traffic Conditions | 6 |
| 7.0 Traffic Signal Warrant Study | 7 |
| 8.0 Road Impact Fee..... | 8 |
| 9.0 Auxiliary Lane Review at the Study Area Intersections | 8 |
| 9.1 Review of Crash Data at Milam Road / Burgess Road | 9 |
| 9.2 Cost Estimates for Improvements..... | 9 |
| 9.3 Reimbursable Improvements..... | 10 |
| 10.0 Entering Sight Distance | 10 |
| 11.0 Sight Distance Along the Roadway | 10 |
| 12.0 School Drop-Off and Pick-Up Procedures | 11 |
| 13.0 Conclusions | 11 |

Table of Contents (Continued)

List of Appendices

| | |
|------------|------------------------------------|
| Appendix A | Project Correspondence |
| Appendix B | PPACG Traffic Volume Projections |
| Appendix C | Traffic Count Data |
| Appendix D | VISTRO Analysis Results |
| Appendix E | Traffic Signal Warrant Analysis |
| Appendix F | Roadway Improvement Cost Estimates |

List of Tables

| | |
|---------|--|
| Table 1 | – Estimated Daily Volumes for Key Links in the Study Area |
| Table 2 | – Intersection Operational Summary |
| Table 3 | – Trip Generation Estimate |
| Table 4 | – Year 2026 Auxiliary Lane Analysis – Tuesday & Thursday Traffic |
| Table 5 | – Year 2026 Auxiliary Lane Analysis – Monday & Wednesday Traffic |

List of Figures

| | |
|-----------|---|
| Figure 1 | – Vicinity Map |
| Figure 2 | – Site Layout |
| Figure 3 | – Laneage and Traffic Control – Existing |
| Figure 4 | – Year 2023 Traffic Volumes – Morning Peak Hour |
| Figure 5 | – Year 2023 Traffic Volumes – After School Peak Hour |
| Figure 6 | – Trip Distribution |
| Figure 7 | – Tuesday & Thursday Trip Assignment – Morning Peak Hour |
| Figure 8 | – Tuesday & Thursday Trip Assignment – After School Peak Hour |
| Figure 9 | – Year 2026 Background Traffic Volumes – Morning Peak Hour |
| Figure 10 | – Year 2026 Background Traffic Volumes – After School Peak Hour |
| Figure 11 | – Year 2026 Total Traffic Volumes – Morning Peak Hour |
| Figure 12 | – Year 2026 Total Traffic Volumes – After School Peak Hour |
| Figure 13 | – Laneage and Traffic Control – Year 2026 Traffic Volume Scenarios |
| Figure 14 | – Year 2045 Background Traffic Volumes – Morning Peak Hour |
| Figure 15 | – Year 2045 Background Traffic Volumes – After School Peak Hour |
| Figure 16 | – Year 2045 Total Traffic Volumes – Morning Peak Hour |
| Figure 17 | – Year 2045 Total Traffic Volumes – After School Peak Hour |
| Figure 18 | – Laneage and Traffic Control – Year 2045 Traffic Volume Scenarios |
| Figure 19 | – Conceptual Improvement Sketch for the Site Access on Burgess Road |
| Figure 20 | – Conceptual Improvement Sketch for Milam Road at Burgess Road |
| Figure 21 | – Conceptual Improvement Sketch for Burgess Road at Milam Road |
| Figure 22 | – Intersection Sight Distance at the Site Access on Burgess Road |

Haven School

Traffic Impact Study

1.0 Introduction

The Haven School is a tuition-free public program serving kindergarten through 12th grade homeschool students in the Colorado Springs area. It is located at 5490 Burgess Road in El Paso County. The property has two buildings that are used for the school and a single family dwelling unit that is not occupied. A vicinity map is contained in Figure 1 that shows the location of the site on the north side of Burgess Road. Figure 2 shows an aerial photo that was obtained from the El Paso County website. The buildings and their proximity to Burgess Road can be seen in the figure. Information about the Haven School can be found [here](#).

Haven School provides science, arts, and nature courses in the classical tradition. There are 110 students currently attending the Haven School. The days that they attend are as follows.

- 40 kindergarten through 6th grade students come to the school one day per week on Monday through Thursday
- 70 7th through 12th grade students come to the school twice each week on Tuesdays and Thursdays.

The school has a capacity of 120 students that would include an additional 10 students in 7th through 12th grades.

Haven School is open a total of thirty weeks during the school year. The school day begins after the morning peak hour and ends before the evening peak hour. The drop off times are 8:45 a.m. and 9:00 a.m., and the pick-up times are 3:00 p.m. and 3:15 p.m. The times are staggered to separate the elementary and secondary grades.

A meeting was held with the County staff on June 27, 2023 to discuss the assumptions that were used in the traffic study. Meeting notes and the traffic study assumptions discussed at the meeting are contained in Appendix A.

This study has been prepared in conformance with the El Paso County criteria for traffic impact studies¹.

County report review is provided only for general conformance with County standards and design criteria. The County is not responsible for the accuracy and adequacy of the data, analysis, or conclusions. The County through the approval of

¹ [El Paso County Engineering Criteria Manual, Appendix B](#), May 16, 2021.

this document assumes no responsibility for completeness and/or accuracy of this document.

2.0 Project Description

2.1 Study Area

The study area includes the site access on Burgess Road plus the intersections of Burgess Road / Milam Road and Burgess Road / Black Forest Road. Burgess Road / Milam Road is a three-legged intersection with side street stop control. There is a private access that is part of this intersection. Burgess Road / Black Forest Road is a four-legged, signalized intersection. Burgess Road, Milam Road, and Black Forest Road are two-lane minor arterial roadways. The speed limit on Burgess Road near the site is 45 MPH. Refer to Figure 3 for the laneage and traffic control at the study area intersections.

2.2 Study Assumptions

The following assumptions were utilized for this study.

Short-Term Study Horizon. The capacity of the school is expected to be reached by the Year 2025. Based on El Paso County requirements, the short-term horizon is one year following full occupancy of the development, therefore, the short-term horizon is Year 2026.

Long-Term Study Horizon. Year 2045 will be the long-term horizon because it is 20 years following the year when the school is expected to reach capacity.

Growth in Background Traffic. The following annual growth rates were calculated based on Year 2045 projected volumes that were provided by the Pikes Peak Area Council of Governments (PPACG) (see Appendix B).

- Burgess Road between Milam Road and Black Forest Road – 5%
- Milam Road north of Burgess Road – 4%
- Milam Road south of Burgess Road – 2%
- Black Forest Road north of Burgess Road – 3%
- Black Forest Road south of Burgess Road – 5%
- Burgess Road east of Black Forest Road – 2%

Saturation Flow Rate. The saturation flow rate was assumed to be 1,900 passenger cars / hour / lane.

Future Roadway Improvements. No capacity improvements are planned on Burgess Road, Milam Road, or Black Forest Road.

Peak Hour Factor (PHF). For the existing and the short-term planning horizons, the PHF was based on the data collected for the traffic study. A PHF of 0.5 was assumed for the turning movements at the site access. In the long-term horizon, the PHF was assumed to be 0.92 unless the existing PHF is higher than 0.92. In that case, the existing PHF was used in the analysis of the long-term volumes.

Truck Percentage. Vehicle classification data were collected on Burgess Road near the site for 24-hours and the data are summarized in the following table. It shows that an average of 7% trucks passed by the site. Therefore, 7% trucks were assumed for all movements except for the site access. Refer to Section 3.0 for a discussion of the traffic data collection. A truck percentage of 2% was assumed for all movements associated with the site access.

| Direction | Traffic | | % Trucks |
|-----------|---------|--------|----------|
| | Total | Trucks | |
| Eastbound | 2,404 | 133 | 6% |
| Westbound | 2,287 | 204 | 9% |
| Total | 4,691 | 337 | 7% |

3.0 Traffic Count Data

Traffic count data were collected for the project on Wednesday July 19, 2023 by All Traffic Data. The peak hour counts were collected during the drop off and pick up times for the school. The Year 2023 peak hour volumes are summarized in Figures 4 and 5. Existing daily volumes are summarized in the following table and in Table 1. The traffic count data are contained in Appendix C.

Year 2023 Daily Volumes

| Link | Year 2023 Existing Traffic |
|---|----------------------------|
| Burgess Road east of High Meadows Drive | 4,691 |
| Burgess Road west of Black Forest Road | 4,610 |
| Milam Road north of Burgess Road | 4,660 |
| Milam Road south of Burgess Road | 7,920 |
| Black Forest Road north of Burgess Road | 4,660 |
| Black Forest Road south of Burgess Road | 4,850 |
| Burgess Road east of Black Forest Road | 4,990 |

3.1 Level of Service Analysis

To evaluate the performance of the intersections within the study area, the level of service (LOS) was calculated using PTV VISTRO software. This software package utilizes criteria described in the Highway Capacity Manual². LOS is a measure used to describe operational conditions at an intersection. LOS categories ranging from A to F are assigned based on the predicted delay in seconds per vehicle for the intersection as a whole, as well as for individual turning movements. LOS A indicates very good operations, and LOS F indicates poor, congested operations. In rural areas, LOS C is considered the minimum intersection operation.

The following table summarizes the analysis of the Year 2023 conditions. It shows that both of the intersections are currently operating at LOS C, or better. The level of service for intersections with side-street stop-control is determined by the movement with the highest delay value. The detailed analysis results are summarized in Table 2 and the VISTRO analysis results are contained in Appendix D.

Year 2023 Traffic Conditions

| Intersection | Control | Total | |
|--------------------------------------|------------------|---------|--------------|
| | | Morning | After School |
| 1 - Burgess Road / Milam Road | Side-Street Stop | C | B |
| 2 - Burgess Road / Black Forest Road | Signalized | A | A |

4.0 Site Generated Traffic

4.1 Trip Generation

In order to determine the traffic impacts associated with the Haven School, the trip generation was estimated using rates that are contained in Trip Generation, 11th Edition³. The trip generation estimate is contained in Table 3.

The peak hour trips generated by the Haven School are assumed to be distributed as shown in Figure 6. The trip distribution assumption is based on the proximity of the school to the residences in the area. Refer to Figures 7 and 8 for the peak hour trip assignment. The assignments are based on the trip generation for Tuesday and Thursday because the volumes are expected to be higher than on Monday and Wednesday. Considering that the school is open 30 weeks per year, these volumes would only be observed on 60 days per year.

5.0 2026 Traffic Conditions

Haven School is expected to be at capacity by the Year 2025, and the short-term horizon is Year 2026 based on the County requirements. Background traffic volumes were developed by inflating the Year 2023 volumes by the growth rates

² Highway Capacity Manual, 7th Edition. National Academy of Sciences, Engineering, and Medicine. 2022.

³ Trip Generation, 11th Edition. Institute of Transportation Engineers. September 2021.

discussed in Section 2.2. The background traffic volume scenarios are contained in Figures 9 and 10. Total traffic volume scenarios were developed by adding the trip assignment to the background traffic volume scenarios (see Figures 11 and 12).

The results of the analysis are summarized in the following table. It shows that all of the intersections are expected to be operating at LOS C, or better. Figure 13 contains the laneage and traffic control assumed in the analysis of the total traffic volume scenarios.

Year 2026 Traffic Conditions

| Intersection | Control | Background | | Total | |
|--|------------------|------------|--------------|---------|--------------|
| | | Morning | After School | Morning | After School |
| 1 - Burgess Road / Milam Road | Side-Street Stop | C | B | C | B |
| 2 - Burgess Road / Black Forest Road | Signalized | A | A | A | A |
| 3 - Burgess Road / Haven School Access | Side-Street Stop | --- | | B | B |

Analysis was performed at Burgess Road / Milam Road to determine the impact of the improvements on the level of service. It shows that there is no change in the level of service and only a slight change in the delay for the westbound left turn which controls the level of service for this intersection. Constructing the auxiliary lanes will reduce the delay by about 1.5 seconds during the morning peak hour and about 0.5 seconds during the after school peak hour.

Comparison of Burgess Road / Milam Road with and without Improvements

| Movement | With Improvements | | Without Improvements | |
|----------------------|-------------------|--------------|----------------------|--------------|
| | Morning | After School | Morning | After School |
| Intersection | C / 18.5 | B / 13.54 | C / 19.94 | B / 13.95 |
| Southbound Left Turn | A / 7.48 | A / 7.59 | A / 7.45 | A / 7.57 |
| Westbound Left Turn | C / 18.5 | B / 13.54 | C / 19.94 | B / 13.95 |
| Westbound Right Turn | A / 8.93 | A / 9.24 | C / 17.74 | B / 12.03 |

The detailed analysis results are summarized in Table 2 and the VISTRO analysis results are contained in Appendix D.

The Year 2026 daily volumes are summarized in the following table and in Table 1.

Year 2026 Daily Volumes

| Link | Year 2026 Background Traffic | Year 2026 Total Traffic |
|---|------------------------------|-------------------------|
| Burgess Road east of High Meadows Drive | 5,470 | 5,610 |
| Burgess Road west of Black Forest Road | 5,380 | 5,440 |
| Milam Road north of Burgess Road | 5,200 | 5,220 |
| Milam Road south of Burgess Road | 8,420 | 8,540 |
| Black Forest Road north of Burgess Road | 5,090 | 5,090 |
| Black Forest Road south of Burgess Road | 5,670 | 5,710 |
| Burgess Road east of Black Forest Road | 5,310 | 5,330 |

The Year 2026 projected daily volumes were compared against Table 2-4 of the El Paso County Engineering Criteria Manual (ECM). All of the roadways are two-lane rural minor arterials with a threshold of 10,000 ADT. A review of the table shows that the projected daily volumes are all below 10,000 ADT, therefore, the two-lane section is adequate.

6.0 Year 2045 Traffic Conditions

The Year 2045 background and total traffic volume scenarios were determined as discussed in Section 5.0. The background traffic volume scenarios are contained in Figures 14 and 15, and the total traffic volume scenarios are contained in Figures 16 and 17.

The results of the analysis are summarized in the following table. Figure 18 contains the laneage and traffic control assumed in the analysis of the total traffic volume scenarios. It shows that all of the intersections are expected to operate at LOS C, or better. The intersection of Burgess Road / Milam Road is assumed to be signalized by the Year 2045.

Year 2045 Traffic Conditions

| Intersection | Control | Background | | Total | |
|--|------------------|------------|--------------|---------|--------------|
| | | Morning | After School | Morning | After School |
| 1 - Burgess Road / Milam Road | Signalized | A | A | A | A |
| 2 - Burgess Road / Black Forest Road | Signalized | A | A | A | A |
| 3 - Burgess Road / Haven School Access | Side-Street Stop | --- | | C | C |

The detailed analysis results are summarized in Table 2 and the VISTRO analysis results are contained in Appendix D.

The Year 2045 daily volumes are summarized in the following table and in Table 1.

Year 2045 Daily Volumes

| Link | Year 2045 Background Traffic | Year 2045 Total Traffic |
|---|------------------------------|-------------------------|
| Burgess Road east of High Meadows Drive | 14,430 | 14,570 |
| Burgess Road west of Black Forest Road | 14,250 | 14,310 |
| Milam Road north of Burgess Road | 10,370 | 10,390 |
| Milam Road south of Burgess Road | 12,280 | 12,400 |
| Black Forest Road north of Burgess Road | 8,890 | 8,890 |
| Black Forest Road south of Burgess Road | 15,230 | 15,270 |
| Burgess Road east of Black Forest Road | 7,830 | 7,850 |

The Year 2045 projected daily volumes were compared against Table 2-4 of the El Paso County Engineering Criteria Manual (ECM). All of the roadways are two-lane rural minor arterials with a threshold of 10,000 ADT. The traffic volumes on all of the roadways are expected to exceed 10,000 ADT by the Year 2045 which would suggest that the roadways should be widened to four through lanes. The exceptions would be Black Forest Road north of Burgess Road and Burgess Road east of Black Forest Road.

7.0 Traffic Signal Warrant Study

A traffic signal warrant study was performed at Milam Road / Burgess Road based on the requirements contained in the Manual on Uniform Traffic Control Devices⁴ (MUTCD) to determine if a traffic signal will be warranted. The following assumptions were used for the analysis.

Speed Limit. The posted speed limit is 45 MPH on Milam Road.

Number of Main-Street Lanes. One lane exists on Milam Road and is expected to be expanded to two lanes by the Year 2045.

Number of Side-Street Lanes. One side-street lane was assumed on the Burgess Road approach.

Main Street Right Turning Traffic. None of the northbound right turn volumes were included in the warrant because a right turn bypass island is assumed for this

⁴ Manual on Uniform Traffic Control Devices, 11th Edition. Federal Highway Administration. December 2023.

movement. Therefore, the northbound right turning traffic will not pass through the intersection.

Side-Street Right Turning Traffic. 50% of the right turning traffic was included in the warrant analysis because some vehicles will be able to turn into gaps in traffic without the aid of a traffic signal.

To evaluate the signal warrants, 12 hours of turning movement counts were collected from 6:00 a.m. to 6:00 p.m. on Tuesday April 16, 2024 by Sustainable Traffic Solutions. These data are contained in Appendix C. A review of the volumes shows that a traffic signal is not currently warranted, but is expected to be warranted by the four hour warrant by the Year 2045. It is estimated that the traffic signal will be warranted by the Year 2035. The signal warrant study analysis is contained in Appendix E.

8.0 Road Impact Fee

The road impact fee is based on the size of the buildings. The total square footage of the school buildings is 19,723 ft² including 6,370 ft² for the main school building and 13,353 ft² for the barn. The fee for a public/institutional land use is \$3,372.00 per 1,000 ft², therefore, the road impact fee is \$66,505.96 $((19,723/1000) \times \$3,372 = \$66,505.96)$.

9.0 Auxiliary Lane Review at the Study Area Intersections

The need for auxiliary lanes was reviewed at the study area intersections based on the requirements contained in Section 2.3.7D of the ECM. Burgess Road, Milam Road, and Black Forest Road are all classified as minor arterials by El Paso County. The review is contained in Table 4 for the Tuesday and Thursday volumes, and the review for the Monday and Wednesday volumes is contained in Table 5. The following is a summary of the analysis.

Burgess Road / Haven School Access. An eastbound left turn deceleration lane will be warranted during the morning peak hour on Tuesday and Thursday. This lane will not be warranted on Monday and Wednesday.

Burgess Road / Milam Road. The following lanes will be warranted all four days that the school will be open.

- Southbound left turn decel lane
- Northbound right turn decel lane
- Northbound to eastbound right turn accel lane
- Westbound left turn decel lane

Table 4 also shows that all four of these lanes are currently warranted without the school traffic.

Burgess Road / Black Forest Road. All of the possible auxiliary lanes exist at this intersection.

9.1 Review of Crash Data at Milam Road / Burgess Road

Crash data were reviewed for Milam Road / Burgess Road to estimate the safety impact that the warranted auxiliary lanes would provide. The five most recent years of crash data were reviewed using data that were found on the [CDOT website](#). The following table contains a summary of crash data that shows that there were 10 crashes at the intersection during the five year period. Four of the crashes involved more than one vehicle including two approach turn crashes and two rear end crashes. First, both of the approach turn crashes involved a southbound left turning vehicle colliding with a northbound through vehicle. The CDOT data didn't include the crash reports, so it wasn't possible to read the detail about those crashes. However, it is quite possible that the lack of the southbound left turn lane contributed to those crashes. Second, one of the rear end crashes was on the southbound approach. That crash would have been caused by a vehicle stopped in the through lane waiting to turn left. Considering the volume of traffic that has passed through the intersection in five years, it's difficult to say that three crashes point to a pattern that needs to be addressed. With regard to the school traffic, a small amount of traffic is assumed to come from the north on Milam Road (10 southbound vehicles per day). It doesn't seem likely that this minor volume will result in a safety issue at the intersection.

Crash Summary

| Crash Type | | |
|------------------|-----------|-------------|
| Fixed Object | 3 | 30% |
| Run Off the Road | 1 | 10% |
| Approach Turn | 2 | 20% |
| Rear End | 2 | 20% |
| Animal | 2 | 20% |
| Total | 10 | 100% |

9.2 Cost Estimates for Improvements

Conceptual designs were prepared for both of the intersections to develop cost estimates. Figure 19 contains the conceptual design for the school access on Burgess Road and the conceptual design for Burgess Road / Milam Road is contained in Figures 20 and 21. The auxiliary lane lengths are included in Tables 4 and 5.

Cost estimates were prepared for the improvements and are summarized in the following table. Detailed cost estimates are contained in Appendix F. Based on correspondence with Edward Schoenheit at El Paso County, the Haven School will be responsible for the total cost of improvements at the site access and a portion of the cost to construct the westbound left turn lane on Burgess Road at Milam Road.

The percentage is based on the volume of school traffic that will use the westbound approach to the intersection compared to the total volume on the approach. As noted in the summary table below, that will be approximately 2.8%.

| Intersection | Movement | Cost | School Responsibility | |
|------------------------------|-----------------------------|-----------|-----------------------|-----------|
| | | | Percentage | Amount |
| Burgess Road / School Access | EBLT Decel Lane | \$329,900 | 100.0% | \$329,900 |
| Burgess Road / Milam Road | North Leg (SBLT Decel Lane) | \$231,100 | 0.0% | \$0 |
| | South Leg (NBRT Decel Lane) | \$199,300 | 0.0% | \$0 |
| | WBLT Decel Lane | \$184,900 | 2.8% | \$5,177 |
| | NB to EB RT Accel Lane | \$203,600 | 0.0% | 0 |

9.3 Reimbursable Improvements

Table 4 from the 2016 Major Transportation Corridors Plan Update⁵ was reviewed to determine if any of the identified improvements would be reimbursable. The plan doesn't include any projects on Burgess Road, however, a rural county road upgrade is planned for Milam Road between Shoup Road and Old Ranch Road (project U14). Therefore, the southbound left turn and northbound right turn decel lanes at Burgess Road / Milam Road would be reimbursable improvements.

10.0 Entering Sight Distance

The intersection sight distance was estimated at the site access for the Haven School using methodology that is contained in Table 2-35 of the ECM. The ECM requires a minimum of 450' of sight distance for a passenger vehicle to turn from the school access onto Burgess Road. As shown in Figure 22, adequate entering sight distance exists at the site access. The entering sight distance was only verified for passenger vehicles because buses and trucks are not expected to use the access based on information provided by the Haven School. Considering the vertical geometry east of the site access, there isn't enough sight distance to accommodate a school bus, single unit truck, or multi-unit truck.

11.0 Sight Distance Along the Roadway

The sight distance along the roadway was evaluated as required by Section 2.4.1D of the ECM. Table 2-33 requires a minimum of 325' of sight distance along the roadway for a 45 MPH speed limit and would accommodate vehicle speeds of 55 MPH. As shown in Figure 22, there is a minimum of 450' of sight distance east and west of the school access, therefore, the criteria were satisfied.

⁵ 2016 Major Transportation Corridors Plan Update. El Paso County. Adopted December 6, 2016.

12.0 School Drop-Off and Pick-Up Procedures

The length of the drop-off and pick-up queues were estimated using the Poisson distribution. Based on information provided by the Haven School, it typically takes a parent about three minutes to enter the property, drop-off or pick-up, and then leave the property. If the parent travels at approximately 20 MPH on the Haven School property (1,050' between the entrance and the drop-off or pick-up location), that would allow about 90 seconds for the student to enter or exit the vehicle. The following information was provided by the Haven School.

- The pick-up and drop-off are staggered for the different grades, so not all parents arrive at the same time.
- 10% of the 7th through 12th grade students drive themselves to school.

The average queue length is estimated to be approximately nine vehicles long (approximately 153') based on the following assumptions.

- The drop-off / pick-up queue was estimated for the 7th through 12th grade students because that is the largest group of students.
- The vehicle occupancy was assumed to be one student per vehicle.
- The capacity for the 7th through 12th grade students is 80. Assuming that 10% drive to and from school, 72 parents were assumed to drop-off and pick-up students.
- 90 seconds was assumed for a student to enter or exit the vehicle.

Based on very conservative assumptions, the average queue will not impact the traffic on Burgess Road.

13.0 Conclusions

STS has drawn the following conclusions based on the analysis performed for this project.

Intersection Operation. The existing intersections are currently operating at LOS C, or better. In the Year 2045, all of the intersections are expected to continue to operate at a minimum of LOS C.

Traffic Signal Warrant Study. Warrants contained in the MUTCD for signalization of Milam Road / Burgess Road were reviewed to determine if the intersection will warrant signalization. The intersection is not expected to meet signal warrants in the Year 2026, however, the Year 2045 volumes satisfy the four hour warrant. It is estimated that the intersection will warrant signalization by the Year 2035.

Auxiliary Lane Review at the Site Access on Burgess Road. An eastbound left turn deceleration lane is warranted based on the Tuesday and Thursday peak hour trip generation.

Auxiliary Lane Review at Milam Road / Burgess Road. The following lanes are warranted at the intersection.

-
- Southbound left turn deceleration lane
 - Northbound right turn deceleration lane
 - Northbound to eastbound right turn acceleration lane
 - Westbound left turn deceleration lane

Entering Sight Distance. There is adequate entering sight distance for passenger vehicles. The entering sight distance was only verified for passenger vehicles because buses and trucks are not expected to use the access based on information provided by the Haven School. Considering the vertical geometry east of the site access, there isn't enough sight distance to accommodate a school bus, single unit truck, or multi-unit truck.

Sight Distance Along the Roadway. The criteria are satisfied for the 45 MPH speed limit and would accommodate vehicle speeds of 55 MPH.

School Drop-Off and Pick-Up Procedures. Parents dropping-off and picking-up students will not impact the traffic on Burgess Road.

Tables

Table 1 – Estimated Daily Volumes for Key Links in the Study Area

Table 2 – Intersection Operational Summary

Table 3 – Trip Generation Estimate

Table 4 – Year 2026 Auxiliary Lane Analysis – Tuesday & Thursday Traffic

Table 5 – Year 2026 Auxiliary Lane Analysis – Monday & Wednesday Traffic

Table 1. Estimated Daily Volumes for Key Links in the Study Area

| Link | Year 2023 Existing Traffic ¹ | Year 2026 Background Traffic | Haven School | Year 2026 Total Traffic | School Traffic as a Percentage of Total Traffic | Year 2045 Background Traffic | Year 2045 Total Traffic |
|---|---|------------------------------|--------------|-------------------------|---|------------------------------|-------------------------|
| Burgess Road east of Milam Road | 4,690 | 4,940 | 140 | 5,080 | 2.8% | 13,000 | 13,140 |
| Burgess Road east of High Meadows Drive | 4,691 | 5,470 | 140 | 5,610 | 2.6% | 14,430 | 14,570 |
| Burgess Road west of Black Forest Road | 4,610 | 5,380 | 60 | 5,440 | 1.1% | 14,250 | 14,310 |
| Milam Road north of Burgess Road | 4,660 | 5,200 | 20 | 5,220 | 0.4% | 10,370 | 10,390 |
| Milam Road south of Burgess Road | 7,920 | 8,420 | 120 | 8,540 | 1.4% | 12,280 | 12,400 |
| Black Forest Road north of Burgess Road | 4,660 | 5,090 | 0 | 5,090 | 0.0% | 8,890 | 8,890 |
| Black Forest Road south of Burgess Road | 4,850 | 5,670 | 40 | 5,710 | 0.7% | 15,230 | 15,270 |
| Burgess Road east of Black Forest Road | 4,990 | 5,310 | 20 | 5,330 | 0.4% | 7,830 | 7,850 |

Note

1. The Year 2023 volumes highlighted in yellow were collected in the field. The other existing volumes were estimated using the peak hour to daily ratio for the evening peak hour.

Table 2. Intersection Operational Summary

| Signalized Intersections ¹ | Year 2023 Volumes | | | | Year 2026 Background Volumes | | | | Year 2026 Total Volumes | | | | Year 2045 Background Volumes | | | | Year 2045 Total Volumes | | | |
|--|-------------------|-----|--------------|-----|------------------------------|-----|--------------|-----|-------------------------|-----|--------------|-----|--|-----|--------------|-----|-------------------------|-----|--------------|-----|
| | Morning | | After School | | Morning | | After School | | Morning | | After School | | Morning | | After School | | Morning | | After School | |
| | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS |
| 1 - Burgess Road / Milam Road | --- | | | | --- | | | | --- | | | | 2.3 | A | 2.3 | A | 2.3 | A | 2.3 | A |
| 2 - Burgess Road / Black Forest Road | 6.0 | A | 5.9 | A | 6.2 | A | 6.1 | A | 6.3 | A | 6.1 | A | 7.0 | A | 8.1 | A | 7.1 | A | 8.1 | A |
| Stop-Controlled Intersections ² | Year 2023 Volumes | | | | Year 2026 Background Volumes | | | | Year 2026 Total Volumes | | | | Year 2026 Total Volumes Without Improvements | | | | Year 2045 Total Volumes | | | |
| | Morning | | After School | | Morning | | After School | | Morning | | After School | | Morning | | After School | | Morning | | After School | |
| | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS | Delay | LOS |
| 1 - Burgess Road / Milam Road | 15.0 | B | 12.4 | B | 17.9 | C | 13.4 | B | 18.5 | C | 13.5 | B | 19.9 | C | 14.0 | B | --- | | | |
| | WBLT | | WBLT | | WBLT | | WBLT | | WBLT | | WBLT | | WBLT | | WBLT | | | | | |
| 3 - Burgess Road / Haven School Access | --- | | | | --- | | | | 13.8 | B | 12.7 | B | --- | | | | 24.7 | C | 21.7 | C |
| | --- | | | | --- | | | | SBLT | | SBLT | | --- | | | | SBLT | | SBLT | |

Notes

1. The level of service for signalized intersections is based on the delay for the entire intersection.
2. The level of service for intersections with side-street stop-control is determined by the movement with the highest delay value.

Table 3. Trip Generation Estimate

| Land Use | ITE Code ¹ | Size | Unit | Trips | | | | | | | | | | | |
|------------------------------------|-----------------------|------|----------|-----------------|-------|-----|-----|--------------------------------|-------|----|-----|-------------------------------------|-------|----|-----|
| | | | | Average Weekday | | | | Morning Peak Hour of Generator | | | | After School Peak Hour of Generator | | | |
| | | | | Rate | Total | In | Out | Rate | Total | In | Out | Rate | Total | In | Out |
| Monday through Thursday | | | | | | | | | | | | | | | |
| Private School (K-8) ² | 530 | 10 | Students | 4.11 | 42 | 21 | 21 | 1.01 | 10 | 6 | 4 | 0.60 | 6 | 3 | 3 |
| Tuesday & Thursday | | | | | | | | | | | | | | | |
| Private School (K-12) ³ | 532 | 80 | Students | 2.48 | 198 | 99 | 99 | 0.80 | 64 | 40 | 24 | 0.53 | 42 | 18 | 25 |
| Total - Tuesday & Thursday | --- | --- | --- | --- | 240 | 120 | 120 | --- | 74 | 46 | 28 | --- | 48 | 21 | 28 |

Notes

1. The trip generation rates were obtained from [Trip Generation, 11th Edition](#) (Institute of Transportation Engineers, 2021).
2. The school has a capacity of 40 K through 6th grade students. Each K through 6th grade student comes to the Haven School one day per week on Monday through Thursday), so their attendance was assumed to be divided equally between the four possible days that they can choose to attend.
3. The school has a capacity of 80 7th through 12th grade students.

Table 4. Year 2026 Auxiliary Lane Analysis - Tuesday & Thursday Traffic

Burgess Road / Haven School Access - With School Traffic

| Movement | Threshold | Year 2026 Total Traffic | | Lane Length | | | | | |
|---------------------------|-----------|-------------------------|--------------|---------------|--------------|----------------|----------------|-------------|---------|
| | | Morning | After School | Speed Limit | Design Speed | Redirect Taper | Approach Taper | Lane Length | Storage |
| EB Left Turn Decel | 25 VPH | 33 | 15 | 45 | 60 | 330 | 240 | 290 | 50 |
| WB Right Turn Decel | 50 VPH | 14 | 6 | Not Warranted | | | | | |
| SB to WB Right Turn Accel | 50 VPH | 19 | 19 | Not Warranted | | | | | |

Burgess Road / Milam Road - Without School Traffic

| Movement | Threshold | Year 2026 Traffic | | Lane Length | | | | | |
|----------------------------------|-----------|-------------------|--------------|---------------|--------------|----------------|----------------|-------------|---------|
| | | Morning | After School | Speed Limit | Design Speed | Redirect Taper | Approach Taper | Lane Length | Storage |
| SB Left Turn Decel | 25 VPH | 40 | 27 | 45 | 60 | 330 | 240 | 290 | 50 |
| NB Right Turn Decel ² | 50 VPH | 115 | 168 | | | --- | 240 | 290 | 0 |
| NB to EB Right Turn Accel | 50 VPH | 115 | 168 | | | --- | 162 | 550 | 0 |
| WB Left Turn Decel | 25 VPH | 237 | 139 | | | --- | 240 | 290 | 200 |
| WB Right Turn Decel | 50 VPH | 35 | 30 | Not Warranted | | | | | |
| WB to NB Right Turn Accel | 50 VPH | 35 | 30 | Not Warranted | | | | | |

XX Threshold Exceeded

Notes

1. Based on Figures 2-25 and 2-26 of the ECM, the County standards allow for vehicle deceleration in the bay taper.
2. The geometry of the northbound right turn decel lane does not meet County standards. No storage is assumed because a right turn bypass lane and accel lane are assumed.

Burgess Road / Milam Road - Without School Traffic

| Movement | Threshold | Year 2026 Traffic | | Lane Length | | | | | |
|----------------------------------|-----------|-------------------|--------------|---------------|--------------|----------------|----------------|-------------|---------|
| | | Morning | After School | Speed Limit | Design Speed | Redirect Taper | Approach Taper | Lane Length | Storage |
| SB Left Turn Decel | 25 VPH | 35 | 25 | 45 | 60 | 330 | 240 | 290 | 50 |
| NB Right Turn Decel ² | 50 VPH | 87 | 155 | | | --- | 240 | 290 | 0 |
| NB to EB Right Turn Accel | 50 VPH | 87 | 155 | | | --- | 162 | 550 | 0 |
| WB Left Turn Decel | 25 VPH | 221 | 123 | | | --- | 240 | 290 | 200 |
| WB Right Turn Decel | 50 VPH | 32 | 27 | Not Warranted | | | | | |
| WB to NB Right Turn Accel | 50 VPH | 32 | 27 | Not Warranted | | | | | |

XX Threshold Exceeded

Table 5. Year 2026 Auxiliary Lane Analysis - Monday & Wednesday Traffic

Burgess Road / Haven School Access

| Movement | Threshold | Year 2026 Total Traffic | | Lane Length | | | | | |
|---------------------------|-----------|-------------------------|--------------|---------------|--------------|----------------|----------------|-------------|---------|
| | | Morning | After School | Speed Limit | Design Speed | Redirect Taper | Approach Taper | Lane Length | Storage |
| EB Left Turn Decel | 25 VPH | 4 | 2 | 45 | 60 | 330 | 240 | 290 | 50 |
| WB Right Turn Decel | 50 VPH | 12 | 1 | Not Warranted | | | | | |
| SB to WB Right Turn Accel | 50 VPH | 3 | 2 | Not Warranted | | | | | |

Burgess Road / Milam Road

| Movement | Threshold | Year 2026 Traffic | | Lane Length | | | | | |
|----------------------------------|-----------|-------------------|--------------|---------------|--------------|----------------|----------------|-------------|---------|
| | | Morning | After School | Speed Limit | Design Speed | Redirect Taper | Approach Taper | Lane Length | Storage |
| SB Left Turn Decel | 25 VPH | 37 | 24 | 45 | 60 | 330 | 240 | 290 | 50 |
| NB Right Turn Decel ² | 50 VPH | 109 | 154 | | | --- | 240 | 290 | 0 |
| NB to EB Right Turn Accel | 50 VPH | 109 | 154 | | | --- | 162 | 550 | 0 |
| WB Left Turn Decel | 25 VPH | 225 | 119 | | | --- | 240 | 290 | 200 |
| WB Right Turn Decel | 50 VPH | 32 | 26 | Not Warranted | | | | | |
| WB to NB Right Turn Accel | 50 VPH | 32 | 26 | Not Warranted | | | | | |

XX Threshold Exceeded

Notes

1. Based on Figures 2-25 and 2-26 of the ECM, the County standards allow for vehicle deceleration in the bay taper.
2. The geometry of the northbound right turn decel lane does not meet County standards. No storage is assumed because a right turn bypass lane and accel lane are assumed.

Figures

Figure 1 – Vicinity Map

Figure 2 – Site Layout

Figure 3 – Laneage and Traffic Control – Existing

Figure 4 – Year 2023 Traffic Volumes – Morning Peak Hour

Figure 5 – Year 2023 Traffic Volumes – After School Peak Hour

Figure 6 – Trip Distribution

Figure 7 – Tuesday & Thursday Trip Assignment – Morning Peak Hour

Figure 8 – Tuesday & Thursday Trip Assignment – After School Peak Hour

Figure 9 – Year 2026 Background Traffic Volumes – Morning Peak Hour

Figure 10 – Year 2026 Background Traffic Volumes – After School Peak Hour

Figure 11 – Year 2026 Total Traffic Volumes – Morning Peak Hour

Figure 12 – Year 2026 Total Traffic Volumes – After School Peak Hour

Figure 13 – Laneage and Traffic Control – Year 2026 Traffic Volume Scenarios

Figure 14 – Year 2045 Background Traffic Volumes – Morning Peak Hour

Figure 15 – Year 2045 Background Traffic Volumes – After School Peak Hour

Figure 16 – Year 2045 Total Traffic Volumes – Morning Peak Hour

Figure 17 – Year 2045 Total Traffic Volumes – After School Peak Hour


Figure 18 – Laneage and Traffic Control – Year 2045 Traffic Volume Scenarios

Figure 19 – Conceptual Improvement Sketch for the Site Access on Burgess Road

Figure 20 – Conceptual Improvement Sketch for Milam Road at Burgess Road

Figure 21 – Conceptual Improvement Sketch for Burgess Road at Milam Road

Figure 22 – Intersection Sight Distance at the Site Access on Burgess Road

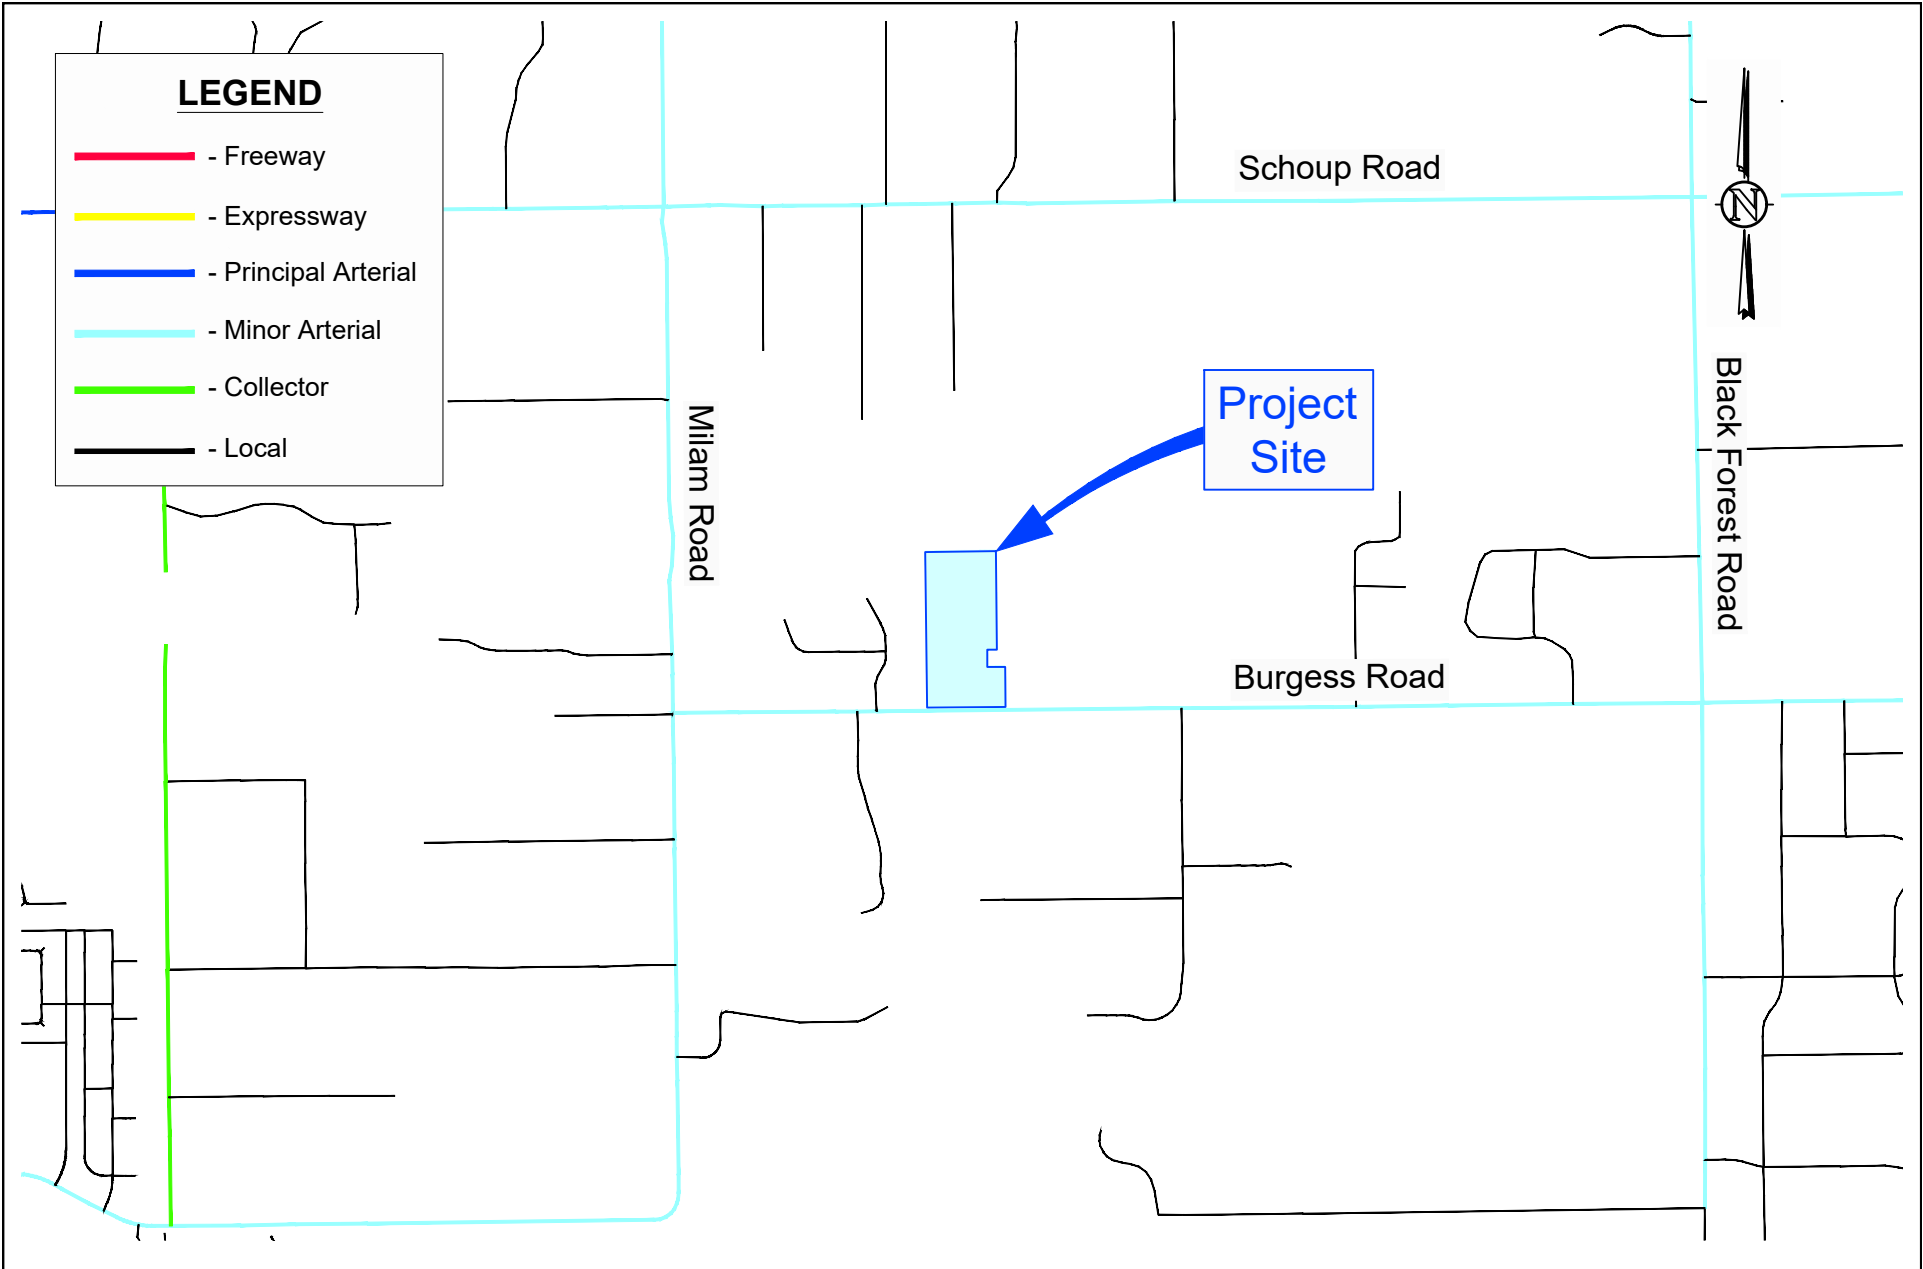

LEGEND

- - Freeway
- - Expressway
- - Principal Arterial
- - Minor Arterial
- - Collector
- - Local

Haven School Traffic Impact Study
VICINITY MAP



| | | | | | | | | | |
|-------|-------------|------|--------------------|----------|-----|-------|--------------|--------|---|
| Scale | 1" = 2,000' | Date | September 12, 2024 | Drawn by | JLH | Job # | Haven School | Figure | 1 |
|-------|-------------|------|--------------------|----------|-----|-------|--------------|--------|---|



Haven School Traffic Impact Study
SITE LAYOUT

| | | | | | | | | | |
|-------|-----|------|--------------------|----------|-----|-------|--------------|--------|---|
| Scale | NTS | Date | September 12, 2024 | Drawn by | JLH | Job # | Haven School | Figure | 2 |
|-------|-----|------|--------------------|----------|-----|-------|--------------|--------|---|

Figure 3 – Laneage and Traffic Control – Existing


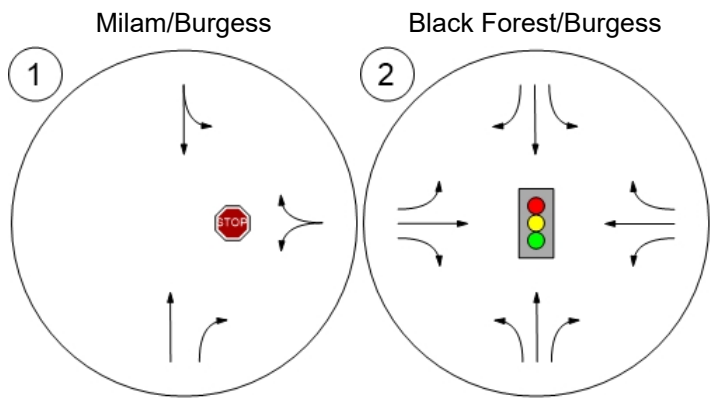



Figure 4 – Year 2023 Traffic Volumes – Morning Peak Hour



Milam/Burgess

Black Forest/Burgess

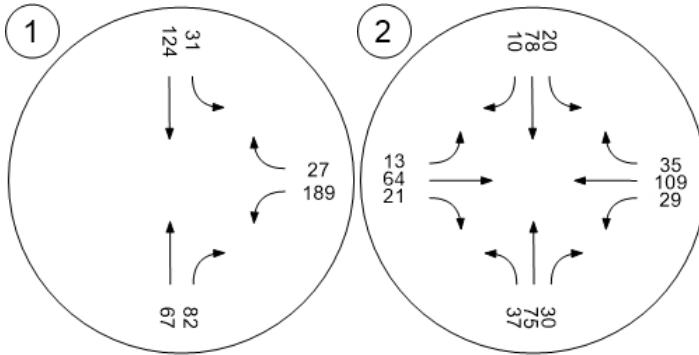

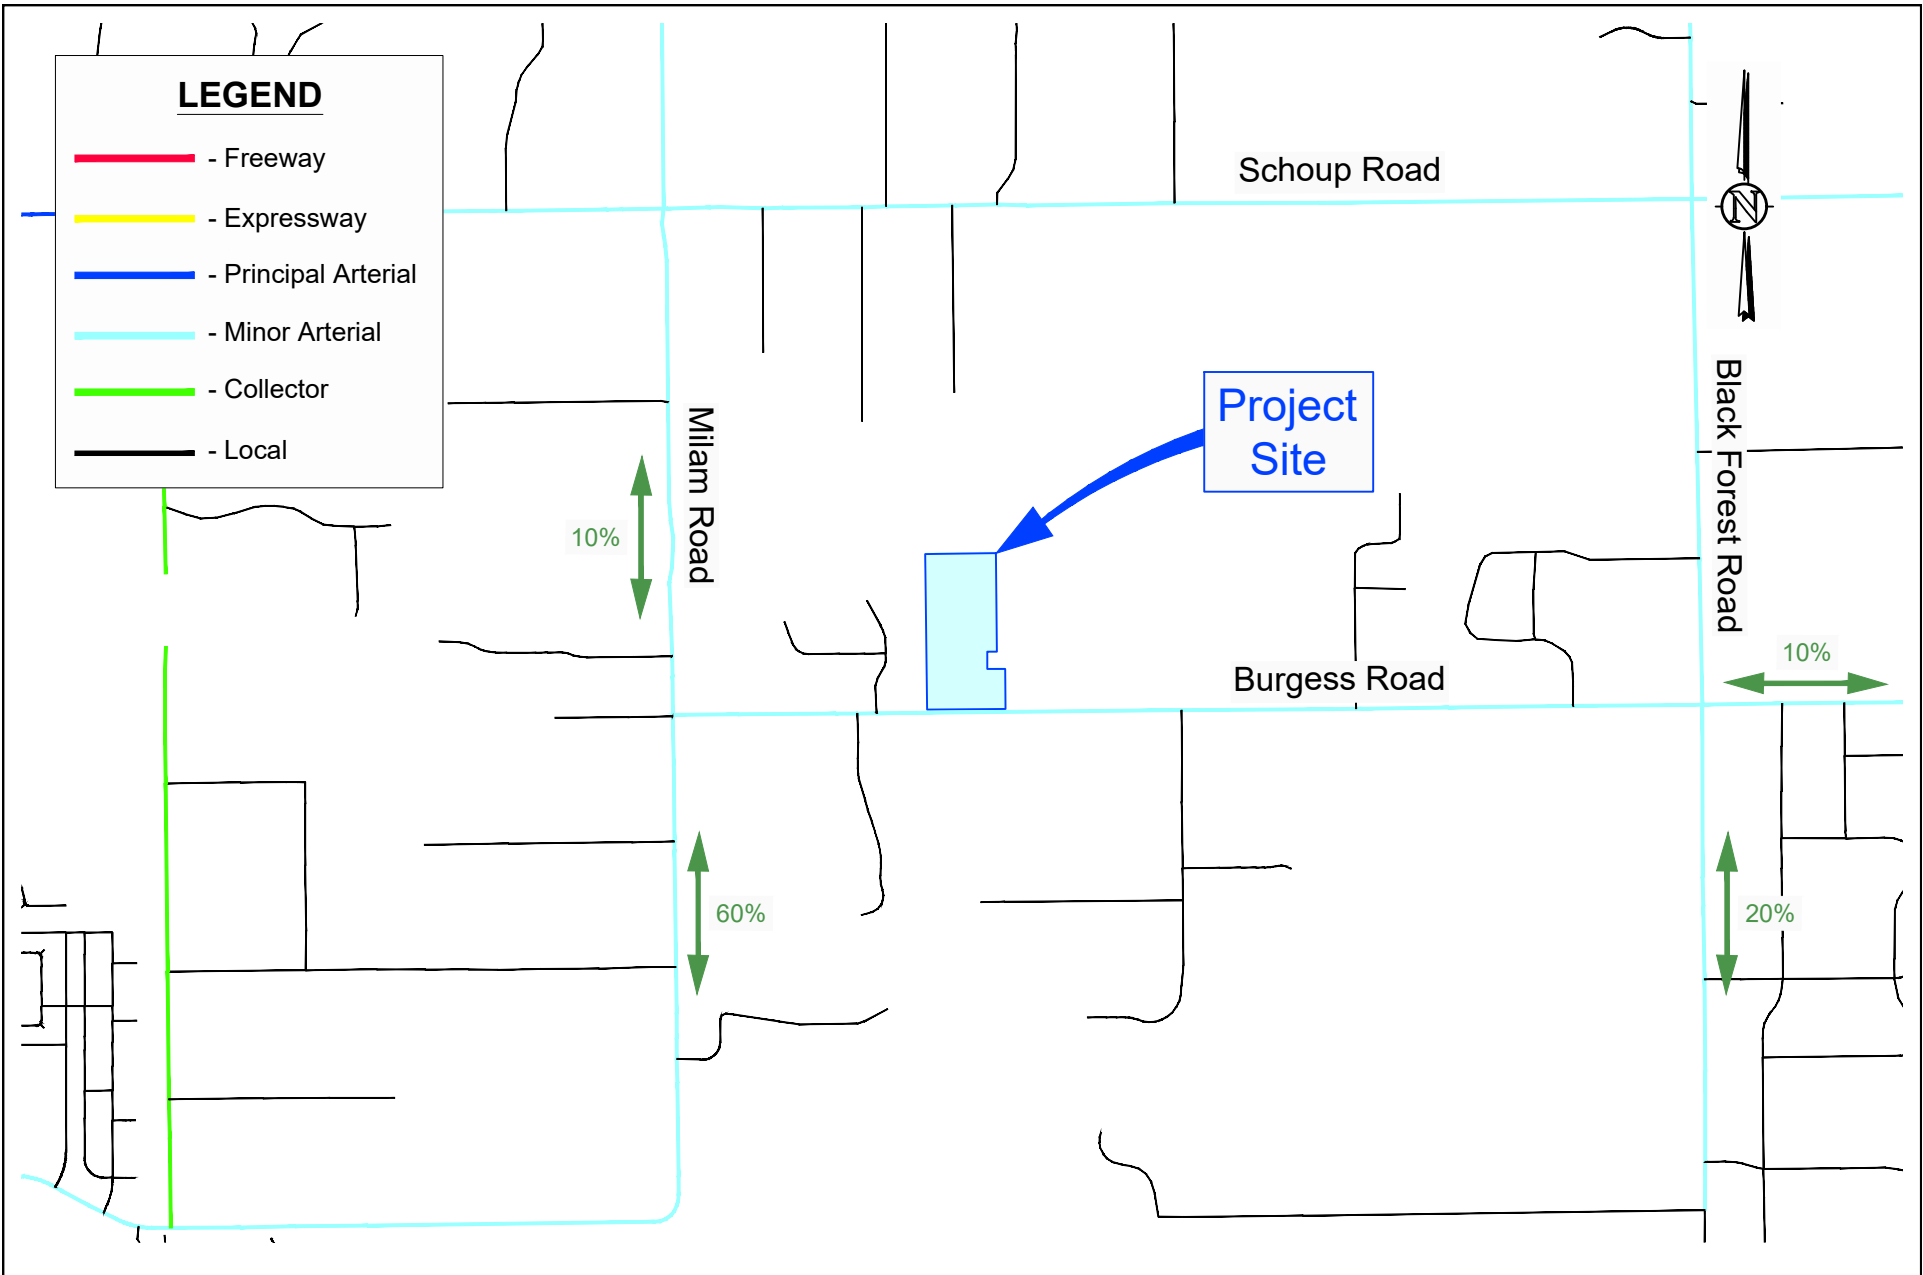

Haven School Traffic Impact Study
TRIP DISTRIBUTION

| | | | | | | | | | |
|-------|-------------|------|--------------------|----------|-----|-------|--------------|--------|---|
| Scale | 1" = 2,000' | Date | September 12, 2024 | Drawn by | JLH | Job # | Haven School | Figure | 6 |
|-------|-------------|------|--------------------|----------|-----|-------|--------------|--------|---|

Figure 7 – Tuesday & Thursday Trip Assignment – Morning Peak Hour

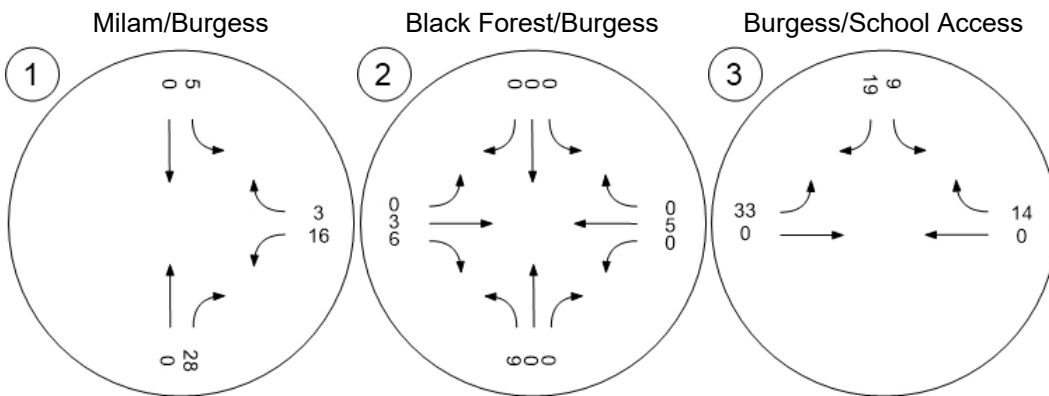


Figure 8 – Tuesday & Thursday Trip Assignment – After School Peak Hour

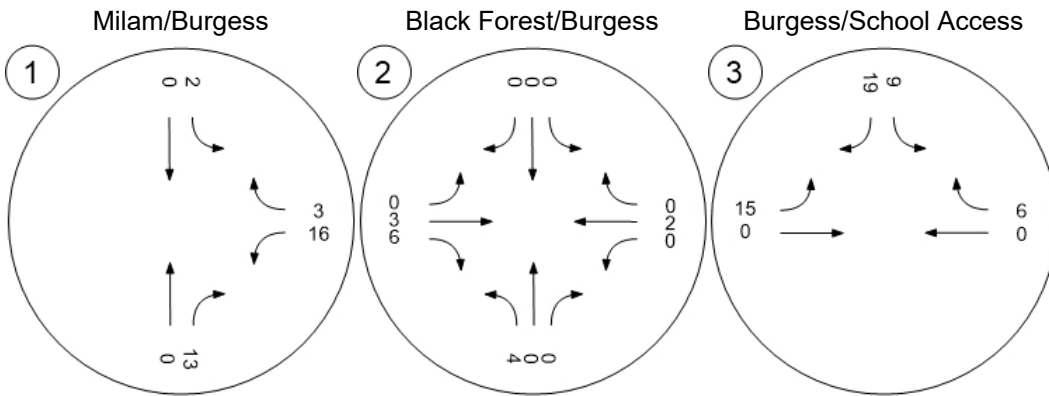


Figure 9 – Year 2026 Background Traffic Volumes – Morning Peak Hour



Milam/Burgess

Black Forest/Burgess

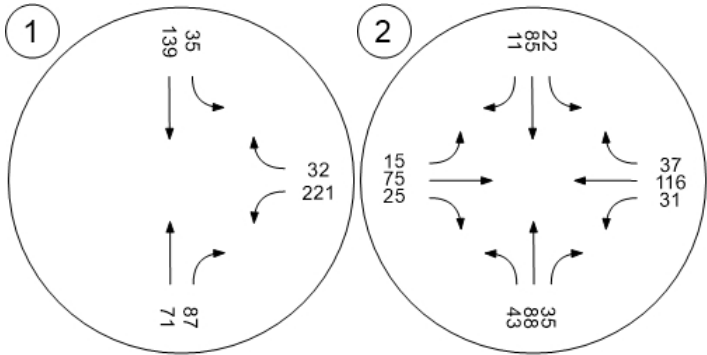


Figure 10 – Year 2026 Background Traffic Volumes – After School Peak Hour

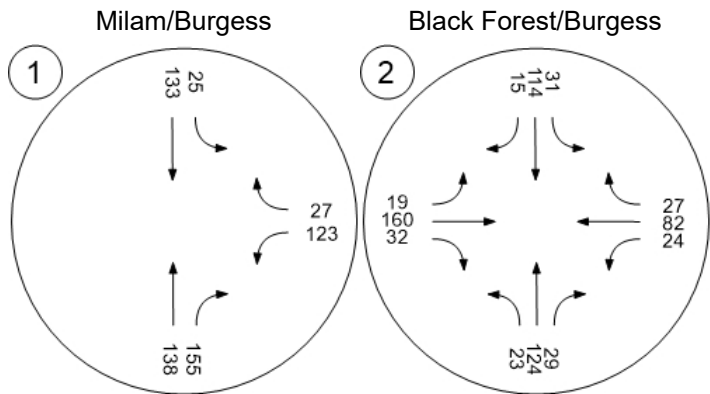


Figure 11 – Year 2026 Total Traffic Volumes – Morning Peak Hour

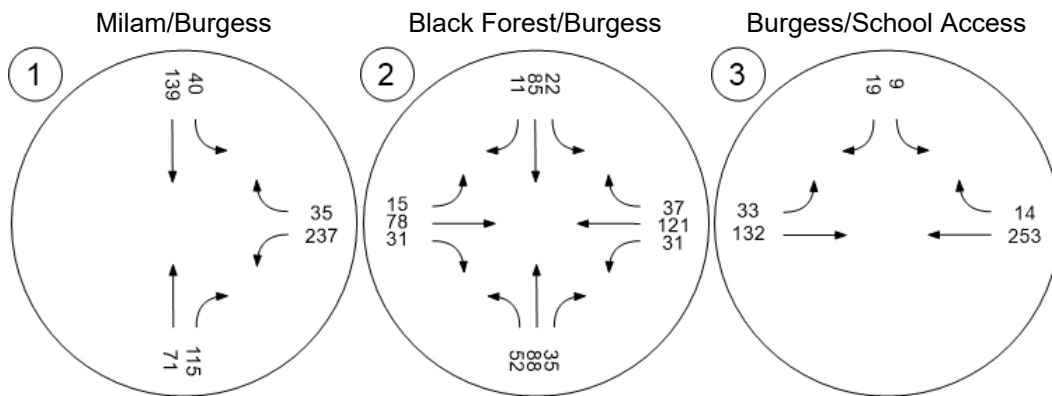


Figure 12 – Year 2026 Total Traffic Volumes – After School Peak Hour

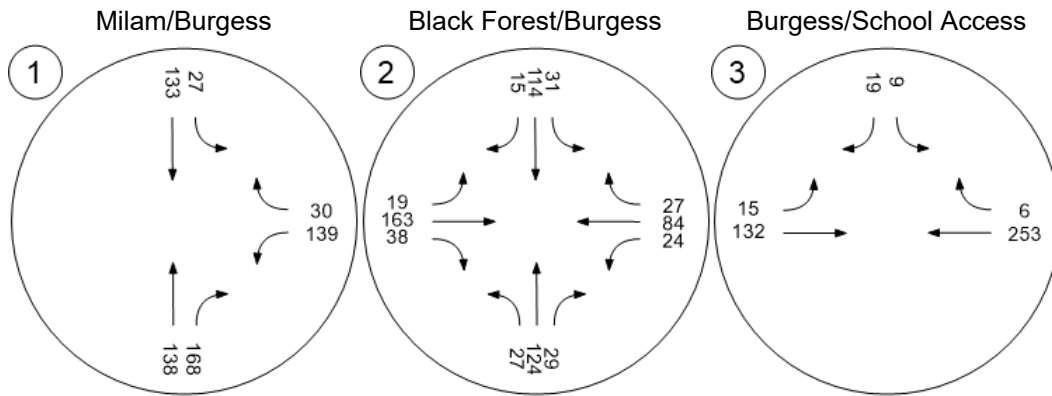


Figure 13 – Laneage and Traffic Control – Year 2026 Traffic Volume Scenarios

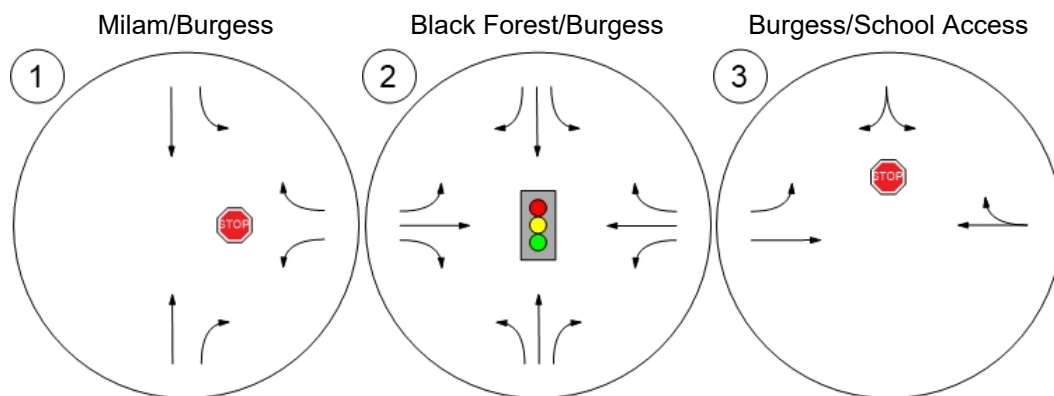


Figure 14 – Year 2045 Background Traffic Volumes – Morning Peak Hour

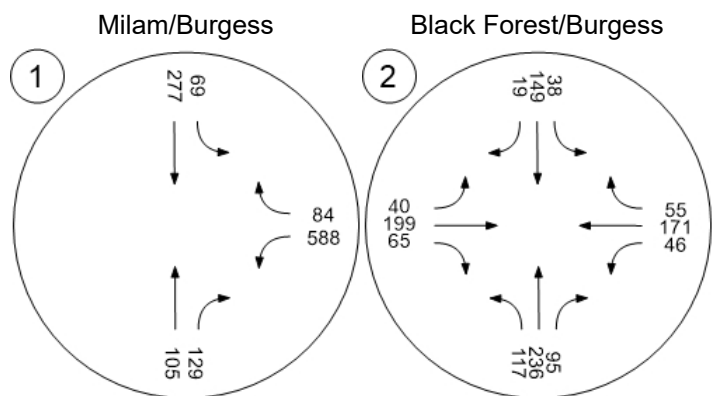


Figure 15 – Year 2045 Background Traffic Volumes – After School Peak Hour



Milam/Burgess

Black Forest/Burgess

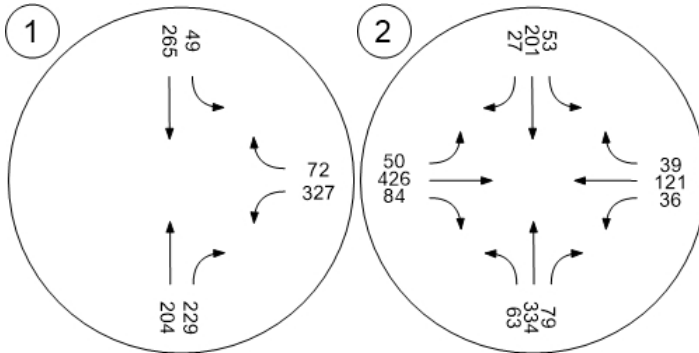


Figure 16 – Year 2045 Total Traffic Volumes – Morning Peak Hour

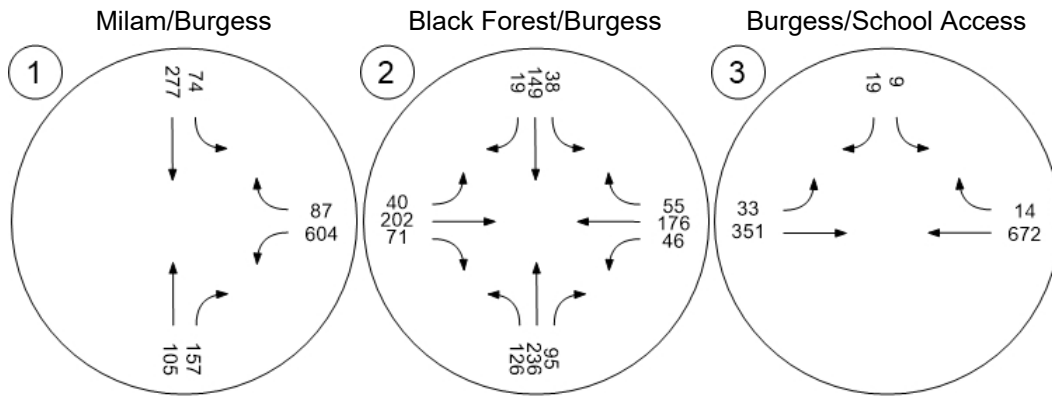


Figure 17 – Year 2045 Total Traffic Volumes – After School Peak Hour




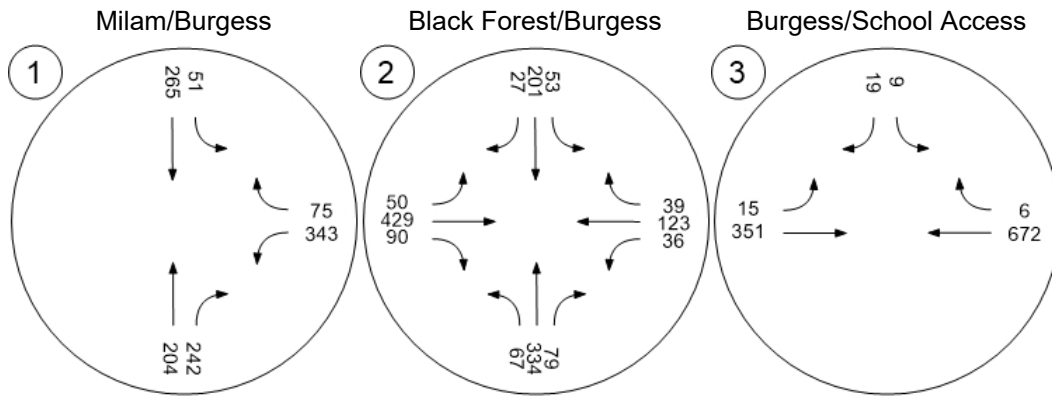



Figure 18 – Laneage and Traffic Control – Year 2045 Traffic Volume Scenarios

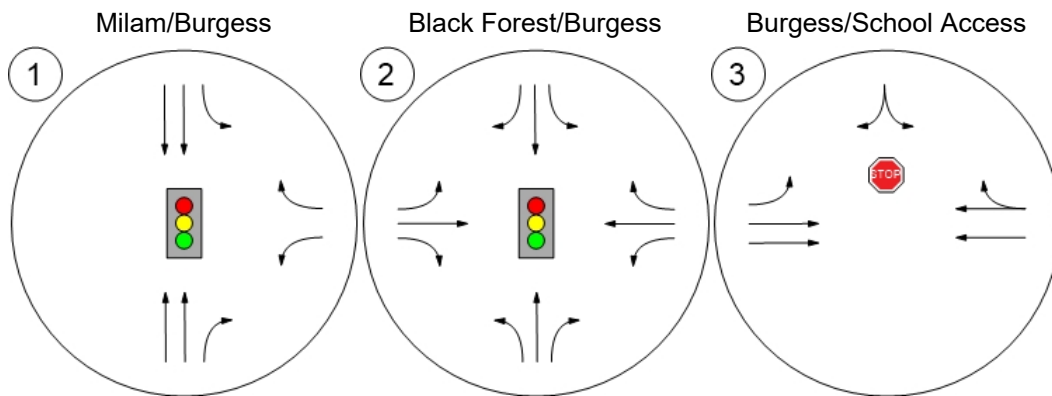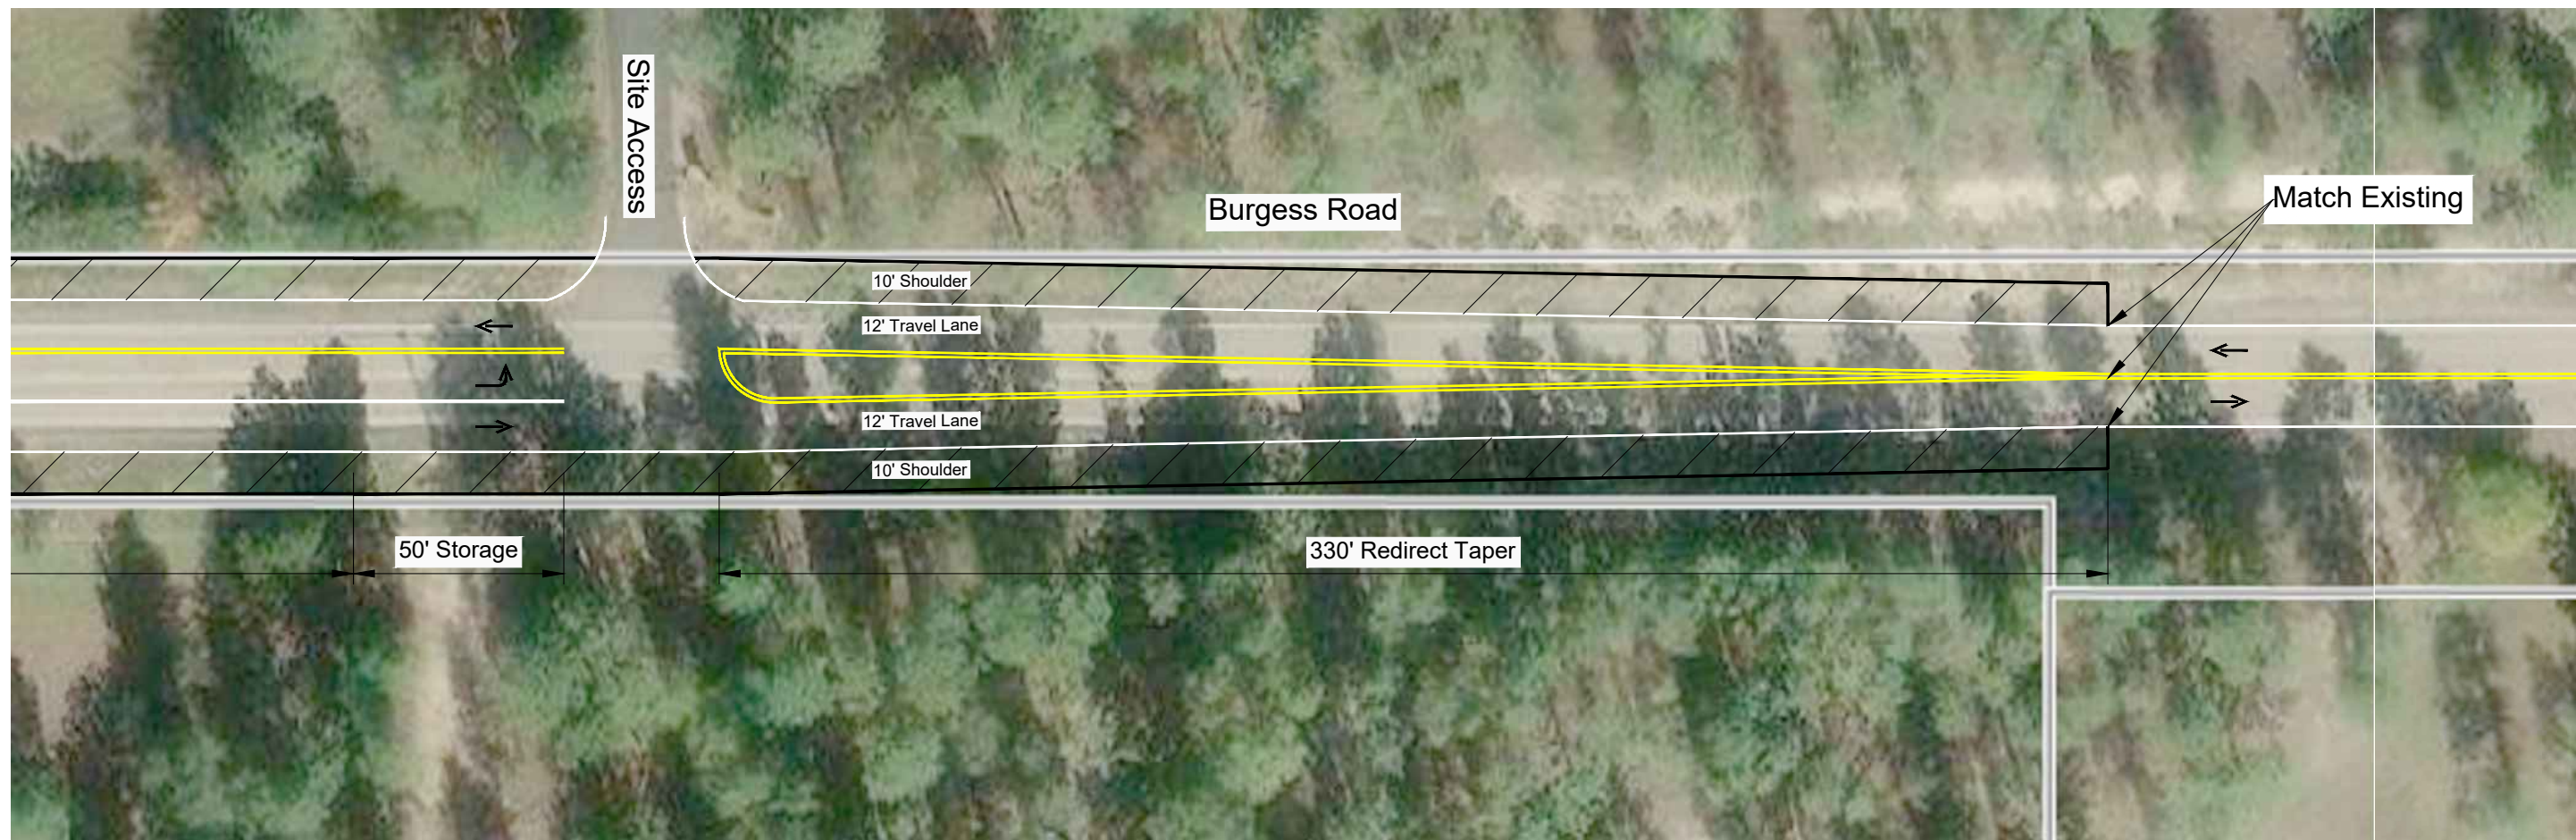

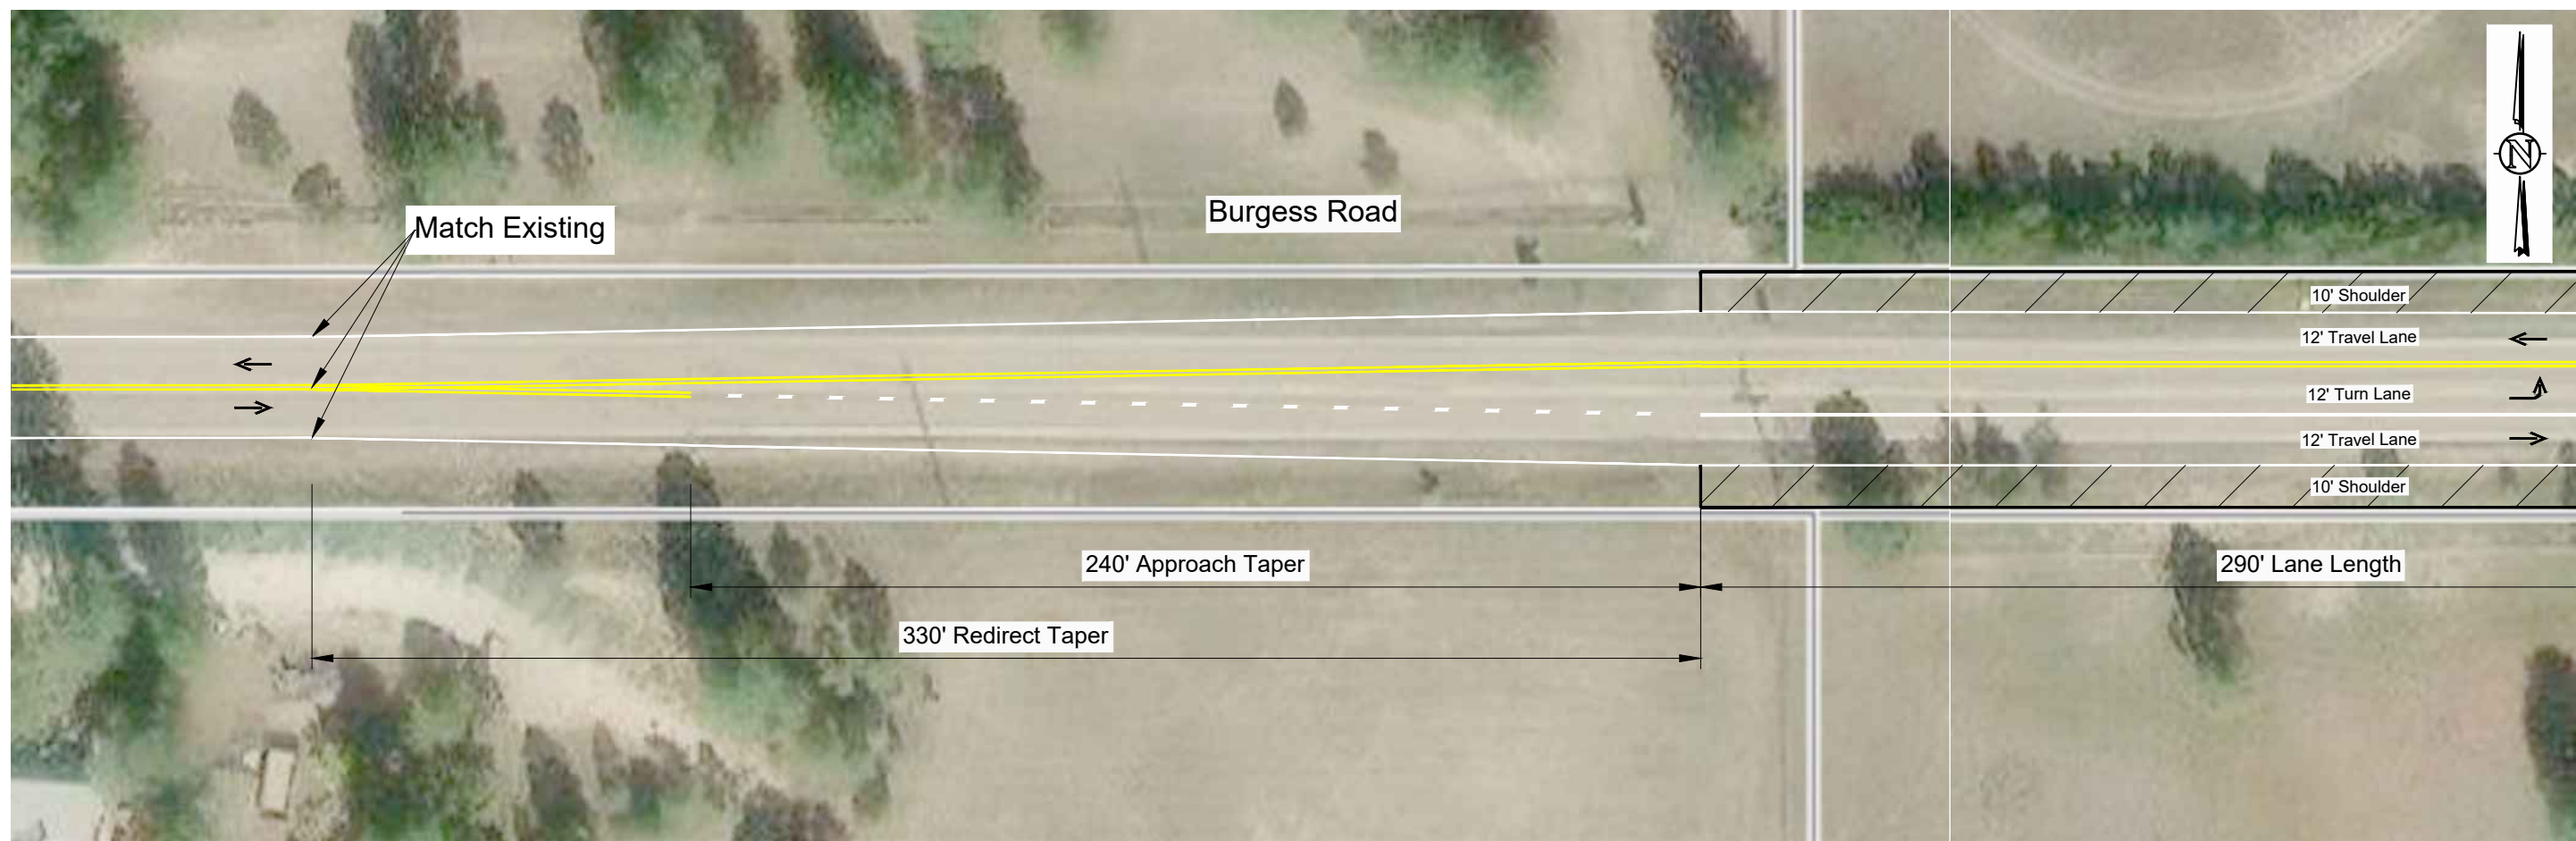

Haven School Traffic Impact Study
CONCEPTUAL IMPROVEMENT SKETCH FOR THE SITE ACCESS ON BURGESS ROAD


| | |
|----------|--------------------|
| Scale | NTS |
| Date | September 12, 2024 |
| Drawn by | JLH |
| Job # | Haven School |
| Figure | 19 |

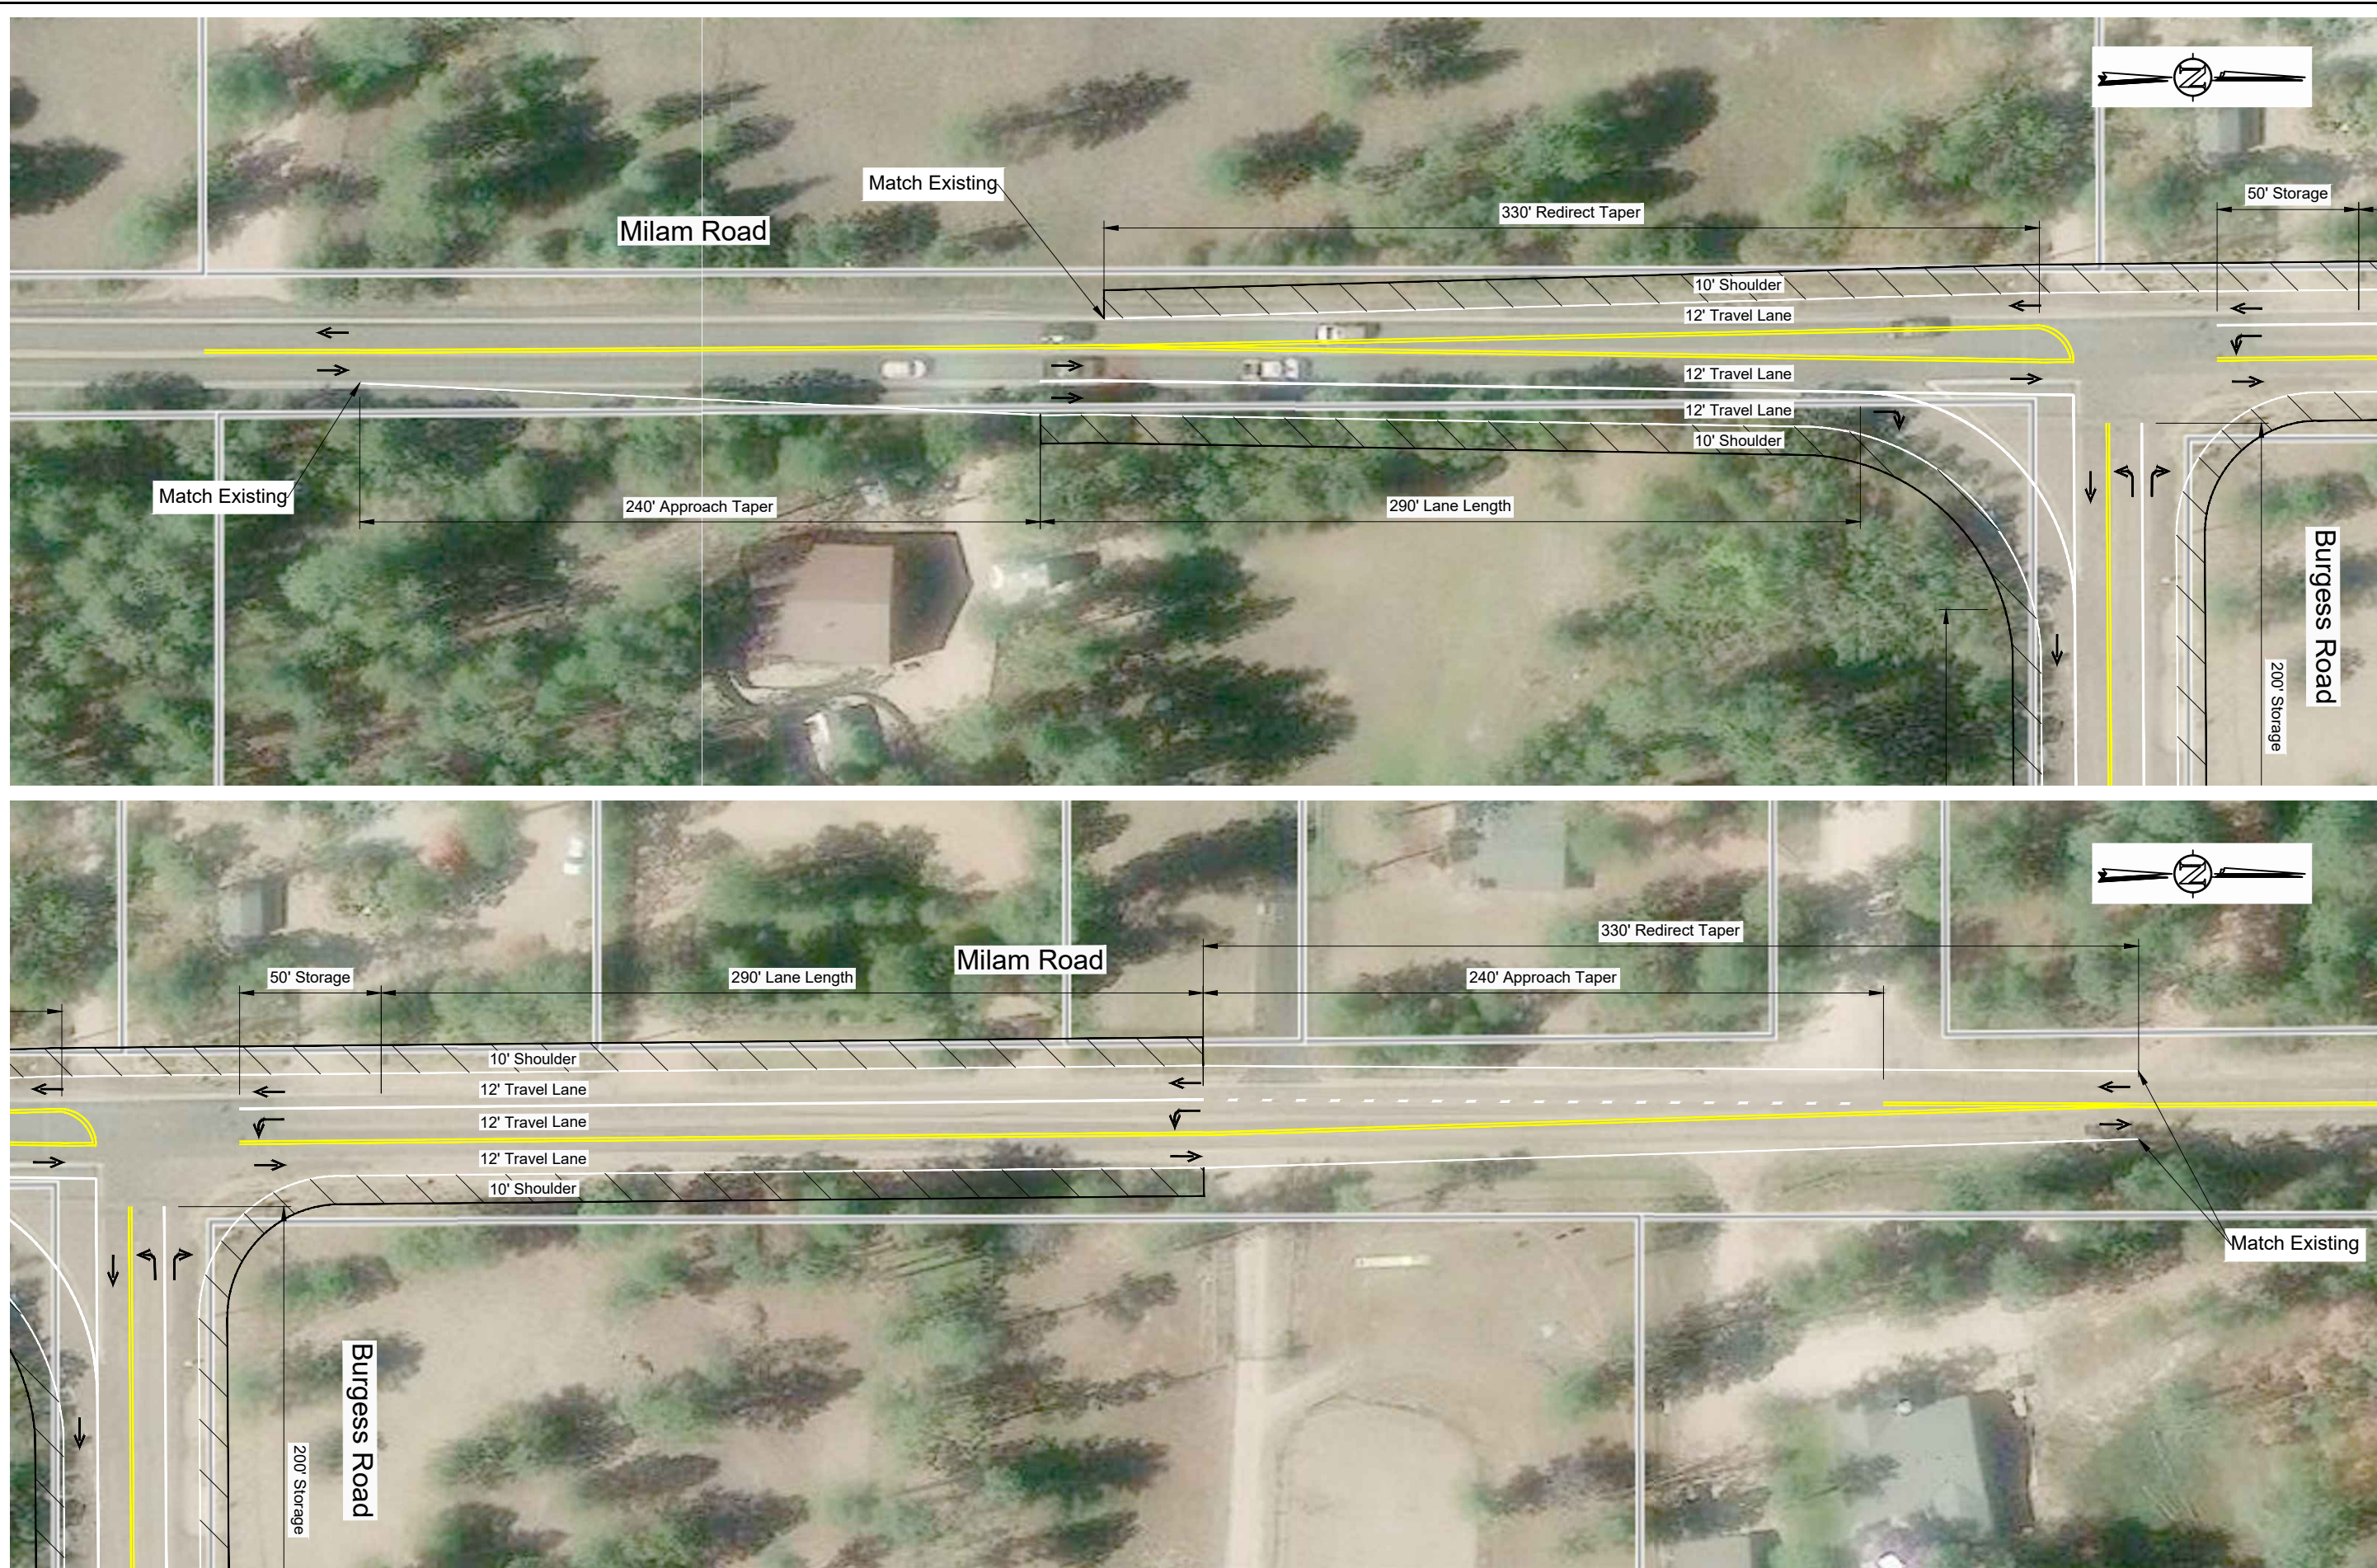



Haven School Traffic Impact Study
 CONCEPTUAL IMPROVEMENT SKETCH FOR BURGESS ROAD AT MILAM ROAD


| | |
|----------|--------------------|
| Scale | NTS |
| Date | September 12, 2024 |
| Drawn by | JLH |
| Job # | Haven School |
| Figure | 21 |

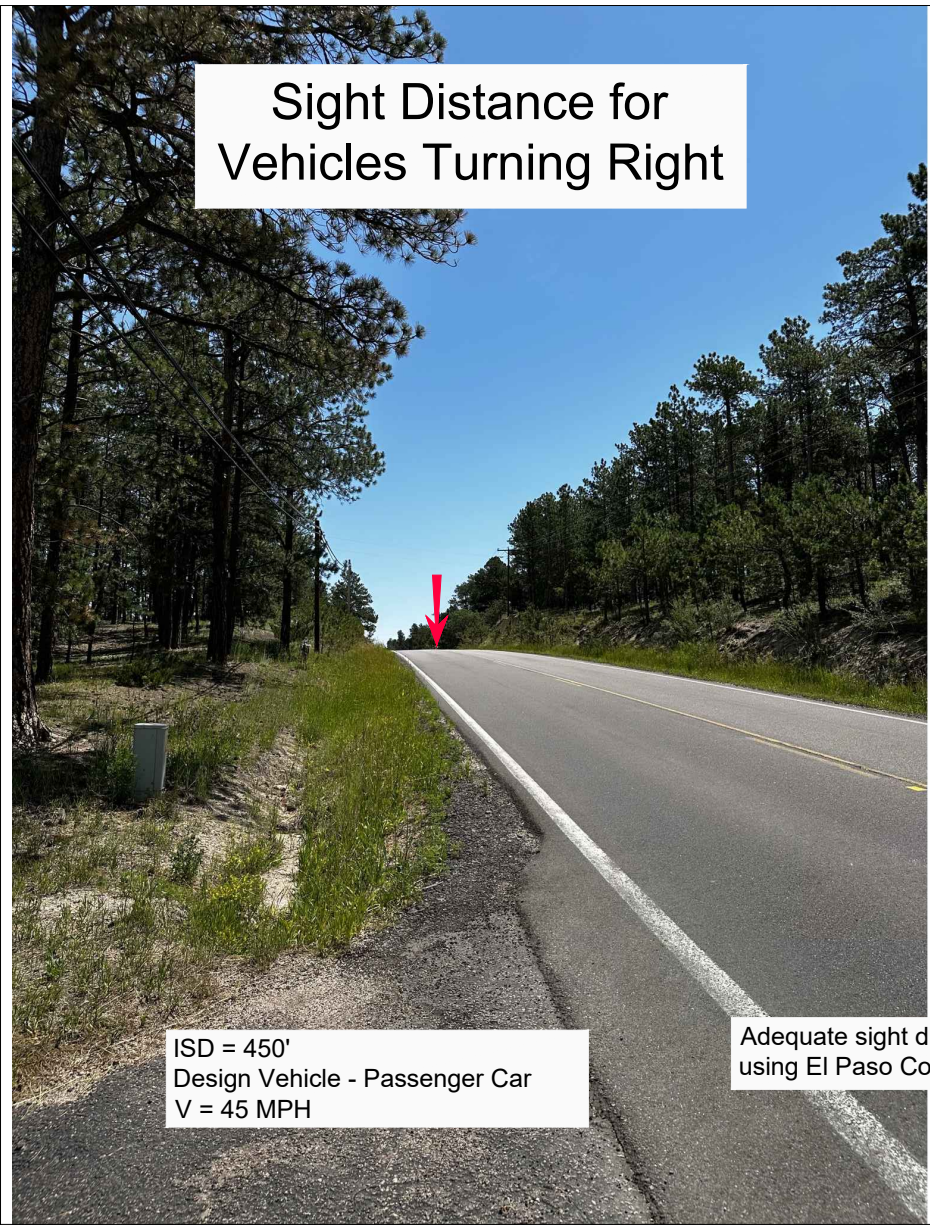

Sight Distance for Vehicles Turning Right

ISD = 450'
Design Vehicle - Passenger Car
V = 45 MPH

Adequate sight distance is available using El Paso County ECM criteria.

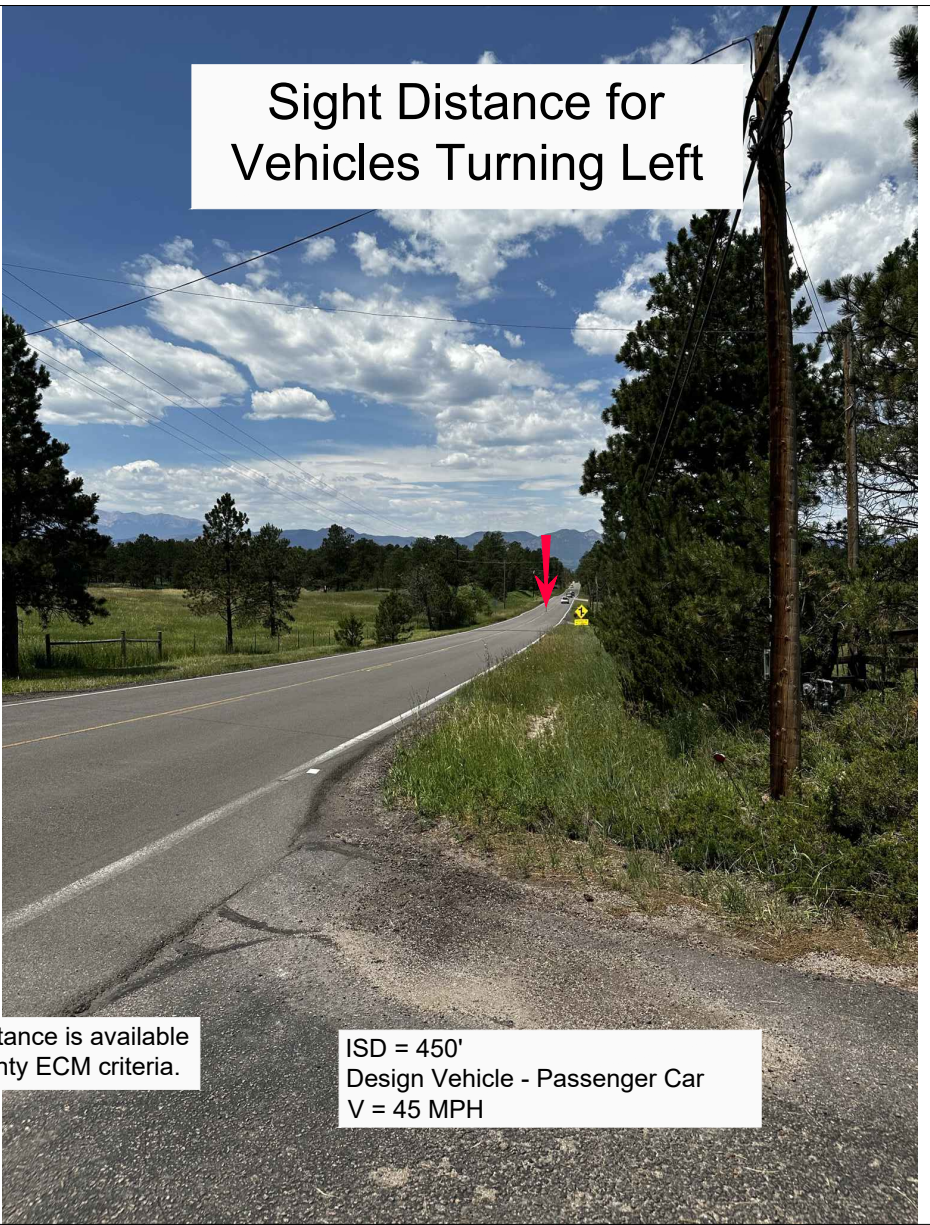

Sight Distance for Vehicles Turning Left

ISD = 450'
Design Vehicle - Passenger Car
V = 45 MPH



Haven School Traffic Impact Study
ENTERING SIGHT DISTANCE AT THE SITE ACCESS ON BURGESS ROAD

| | | | | | | | | | |
|-------|-----|------|--------------------|----------|-----|-------|--------------|--------|----|
| Scale | NTS | Date | September 12, 2024 | Drawn by | JLH | Job # | Haven School | Figure | 22 |
|-------|-----|------|--------------------|----------|-----|-------|--------------|--------|----|

Appendix A

Project Correspondence

Haven School

Traffic Impact Study

1.0 Introduction

The Haven School is a tuition-free public program serving kindergarten through 12th grade homeschool students in the Colorado Springs area. It is located at 5484 Burgess Road in El Paso County. The property has two buildings that are used for the school and a single family dwelling unit that is not occupied. A vicinity map is contained in Figure 1 that shows the location of the site on the north side of Burgess Road. Figure 2 shows an aerial photo that was obtained from the El Paso County website. The buildings and their proximity to Burgess Road can be seen in the figure.

Haven School provides science, arts, and nature courses in the classical tradition. Kindergarten through 6th grade students come to the school one day per week on Monday through Thursday, and 7th through 12th grade students come to the school twice each week on Tuesdays and Thursdays. The school has a capacity of 40 kindergarten through 6th grade students, and 70 7th through 12th grade students. Haven School is open a total of thirty weeks during the school year.

A meeting was held with the County staff on June 27, 2023 to discuss the assumptions that will be used in the traffic study. Meeting minutes can be found in Appendix A.

This study has been prepared in conformance with the El Paso County criteria for traffic impact studies¹.

2.0 Project Description

2.1 Study Area

The study area includes the site access. It is a T-intersection with side-street stop control.

2.2 Study Assumptions

The following assumptions were utilized for this study.

Short-Term Study Horizon. The short-term horizon is assumed to be the Year 2025. The school should be at capacity by that time.

Long-Term Study Horizon. Year 2043 will be the long-term horizon because it is 20 years following the completion of the development.

Growth in Background Traffic. xxxxxxxx

¹ [El Paso County Engineering Criteria Manual, Appendix B](#). May 16, 2021.

Saturation Flow Rate. The saturation flow rate was assumed to be 1,900 passenger cars / hour / lane.

Future Roadway Improvements. xxxxxxxx

Peak Hour Factor (PHF). For the existing and the short-term planning horizons, the PHF was based on the data collected for the traffic study. At new approaches, the PHF was assumed to be 0.85 for all movements in all of the planning horizons. In the long-term horizon, the PHF was assumed to be 0.92 unless the existing PHF is higher than 0.92. In that case, the existing PHF was used in the analysis of the long-term volumes.

Truck Percentage. A truck percentage of 2% was assumed for all movements.

3.0 Site Generated Traffic

3.1 Trip Generation


In order to estimate the traffic impacts associated with the Haven School, the trip generation was estimated using rates contained in the Institute of Transportation Engineers Trip Generation manual² (see Table 3). The trip generation estimate was based on the following assumptions.

- **K – 6th Grade Students.** These students attend the school on one day between Monday and Thursday. The school has a capacity of 40 K through 6th grade students, so 10 students were assumed to attend on each day.
- **7th – 12th Grade Students.** These students attend the school on Tuesday and Thursday. The school has a capacity of 70 7th through 12th grade students.

3.2 Trip Distribution and Assignment

The trip distribution for the development is contained in Figure 6. It was based on population density near the school. The peak hour assignments are contained in Figures 7 and 8.

² Trip Generation, 11th Edition. Institute of Transportation Engineers. September 2021.

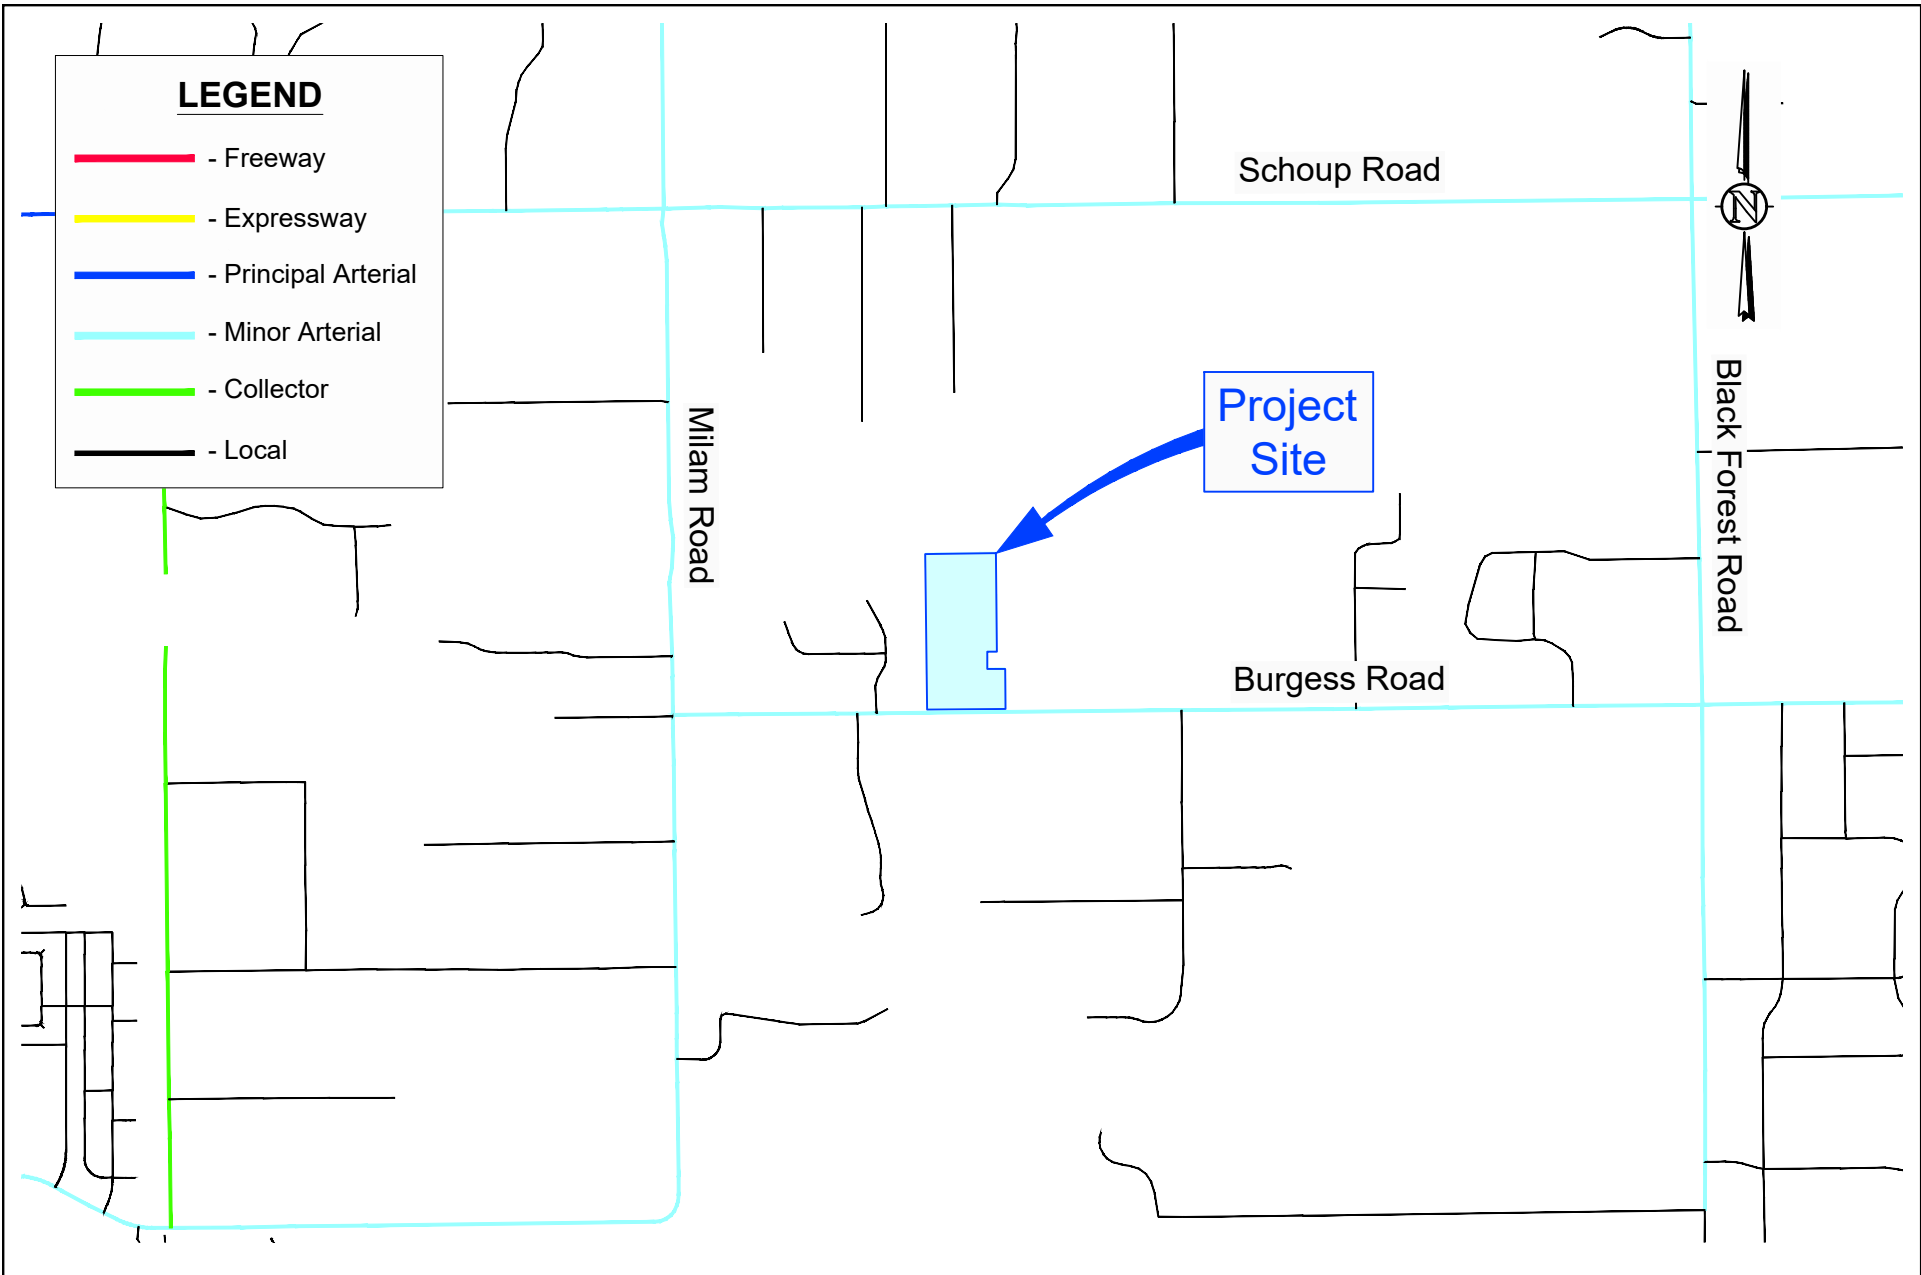


Haven School Traffic Impact Study
VICINITY MAP

| | | | | | | | | | |
|-------|-------------|------|---------------|----------|-----|-------|--------------|--------|---|
| Scale | 1" = 2,000' | Date | June 27, 2023 | Drawn by | JLH | Job # | Haven School | Figure | 1 |
|-------|-------------|------|---------------|----------|-----|-------|--------------|--------|---|



Haven School Traffic Impact Study
SITE PLAN

| | | | | | | | | | |
|-------|-----|------|---------------|----------|-----|-------|--------------|--------|---|
| Scale | NTS | Date | June 27, 2023 | Drawn by | JLH | Job # | Haven School | Figure | 2 |
|-------|-----|------|---------------|----------|-----|-------|--------------|--------|---|

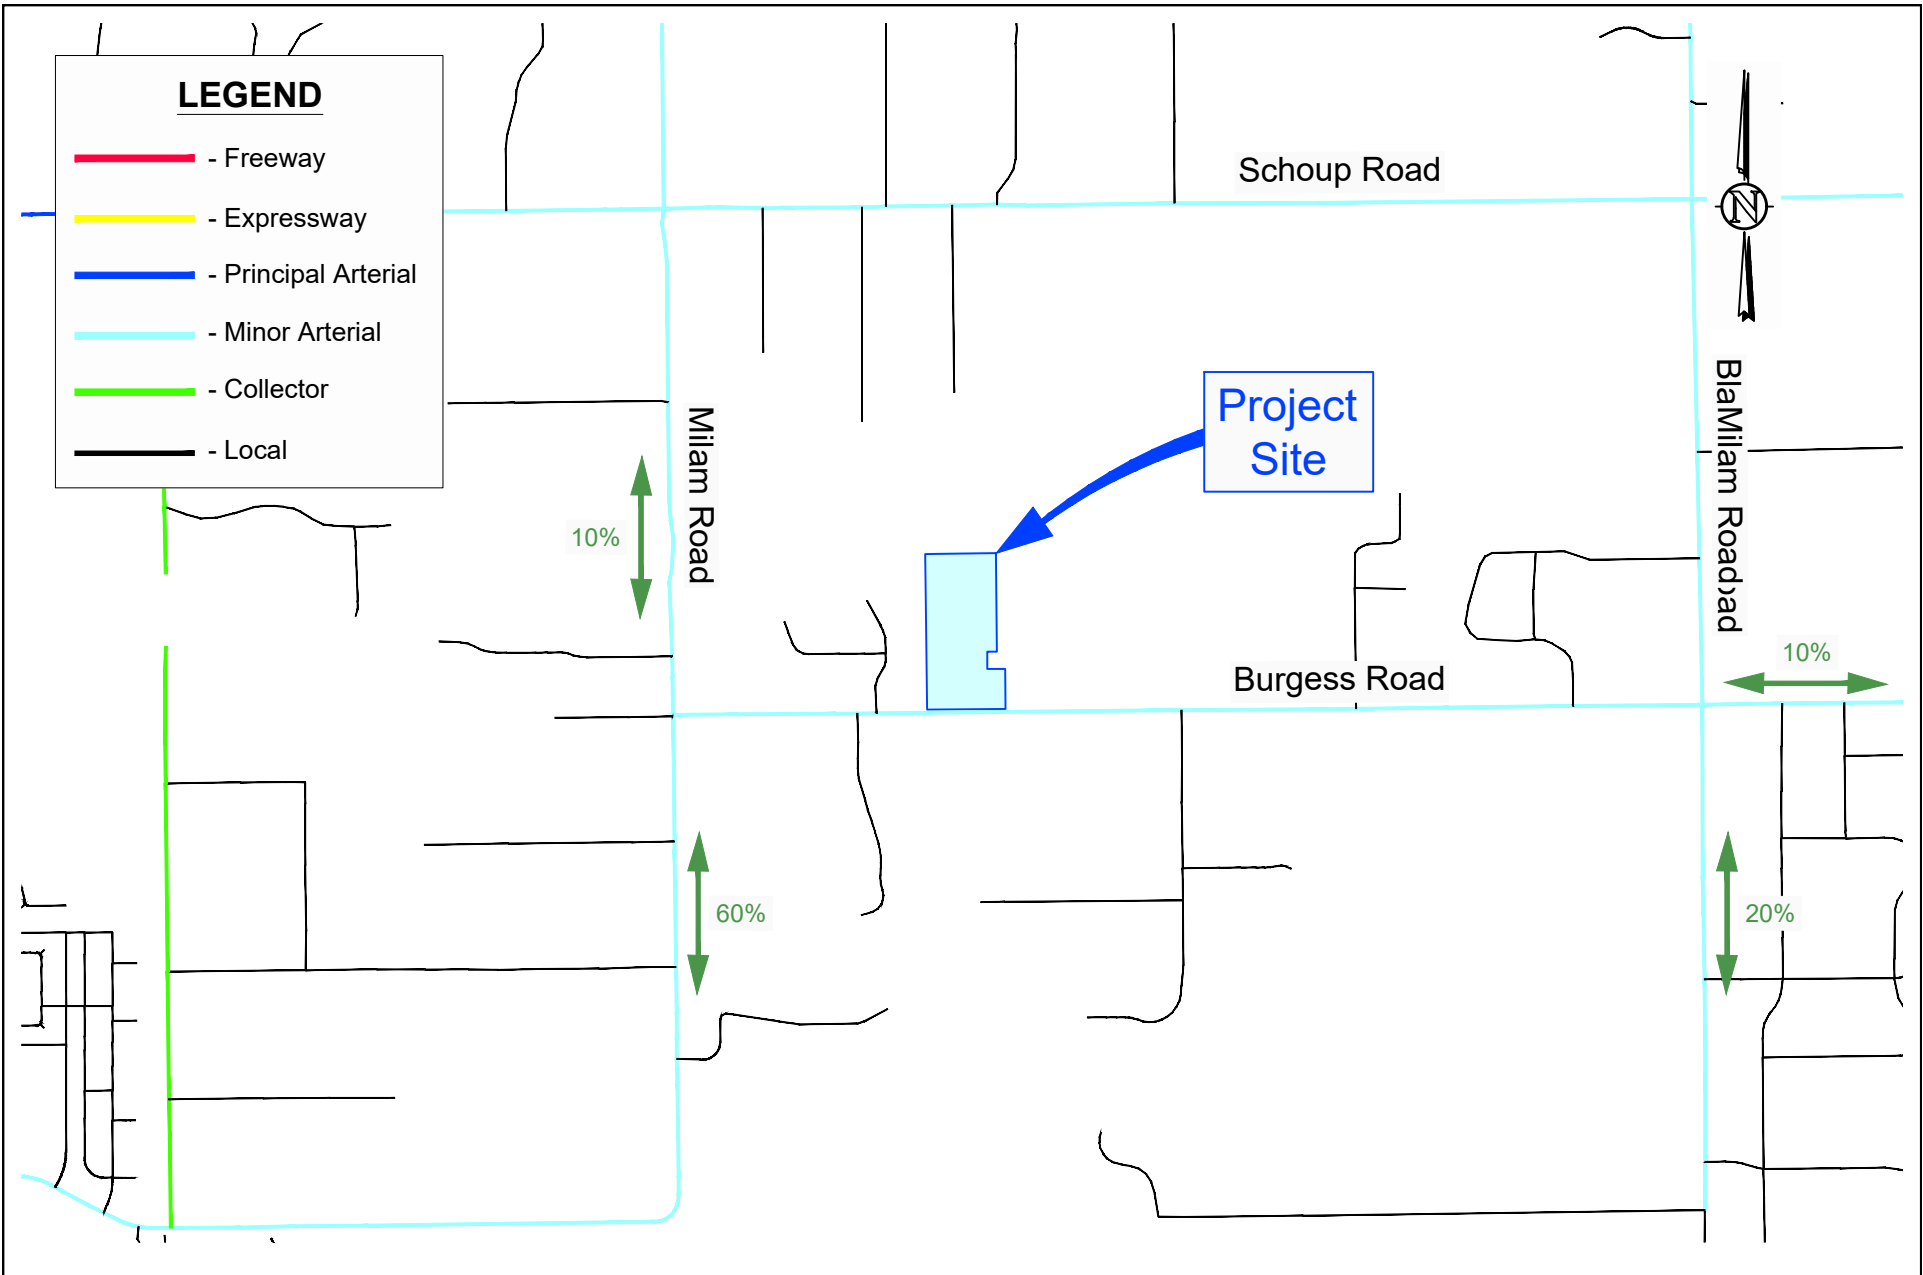

LEGEND

- - Freeway
- - Expressway
- - Principal Arterial
- - Minor Arterial
- - Collector
- - Local

Haven School Traffic Impact Study
TRIP DISTRIBUTION



| | | | | | | | | | |
|-------|-------------|------|---------------|----------|-----|-------|--------------|--------|---|
| Scale | 1" = 2,000' | Date | June 27, 2023 | Drawn by | JLH | Job # | Haven School | Figure | 6 |
|-------|-------------|------|---------------|----------|-----|-------|--------------|--------|---|

Table 3. Trip Generation Estimate

| Land Use | ITE Code ¹ | Size | Unit | Trips | | | | | | | | | | | |
|-------------------------------|-----------------------|------|----------|-----------------|-------|----|-----|--------------------------------|-------|----|-----|----------------------------------|-------|----|-----|
| | | | | Average Weekday | | | | Morning Peak Hour of Generator | | | | Afternoon Peak Hour of Generator | | | |
| | | | | Rate | Total | In | Out | Rate | Total | In | Out | Rate | Total | In | Out |
| Monday & Wednesday | | | | | | | | | | | | | | | |
| Private School (K-8) | 530 | 10 | Students | 4.11 | 42 | 21 | 21 | 1.01 | 10 | 6 | 4 | 0.60 | 6 | 3 | 3 |
| Tuesday & Thursday | | | | | | | | | | | | | | | |
| Private School (K-12) | 532 | 80 | Students | 2.48 | 198 | 99 | 99 | 0.80 | 64 | 40 | 24 | 0.53 | 42 | 18 | 25 |

Notes

1. The trip generation rates were obtained from Trip Generation, 11th Edition (Institute of Transportation Engineers, 2021).

Haven School Meeting with Jeff Rice

June 27, 2023

- Use 0.5 PHF for school
- No improvements are planned on Burgess Road
- Significant impacts for signalized intersection
- Count Milman and Black Forest Road
- Sight distance study is required
- Does the road cross section fit the ADT?

Appendix B

PPACG Traffic Volume Projections



Joe Henderson <thetrafficczar@gmail.com>

Projected Volumes in El Paso County

5 messages

Joe Henderson <joe@sustainabletrafficsolutions.com>

Wed, Aug 23, 2023 at 1:54 PM

To: dmiller@ppacg.org, jobrien@ppacg.org, jbechtel@ppacg.org, jliosatos@ppacg.org

I'm working on a traffic impact study in El Paso County and I need to develop annual growth rates for the roadways in the study area. Does PPACG publish traffic count data and the projected volumes? I've looked your website and can't find them.

--

Joseph L. Henderson, PE, PTOE

Principal

Sustainable Traffic Solutions, Inc.

823 West 124th Drive

Westminster, CO 80234

303.589.6875

joe@sustainabletrafficsolutions.com

sustainabletrafficsolutions.com

Licensed in CO, WY, and IA



William Mast <wmast@ppacg.org>

Wed, Aug 23, 2023 at 2:33 PM

To: "joe@sustainabletrafficsolutions.com" <joe@sustainabletrafficsolutions.com>

Hi Joseph,

We do not publish the model outputs, but can share them. Where is your study area and which forecast years are you interested in?

William Mast, GISP

GIS Admin & Modeling Lead

Pikes Peak Area Council of Governments

(719) 471-7080 ext. 109



Pikes Peak Area
Council of Governments

Communities Working Together

[Quoted text hidden]

Joe Henderson <joe@sustainabletrafficsolutions.com>
To: William Mast <wmast@ppacg.org>

Wed, Aug 23, 2023 at 2:52 PM

William,

The roads in my project at Burgess Road, Milam Road, and Black Forest Road. The long-term horizon year in my study is 2045.

Does that give you enough information?

Joe
[Quoted text hidden]

William Mast <wmast@ppacg.org>
To: Joe Henderson <joe@sustainabletrafficsolutions.com>

Wed, Aug 23, 2023 at 8:56 PM

The attached png displays the 2045 directional volumes for Burgess Rd, Milam to Black Forest.

[Quoted text hidden]
[Quoted text hidden]

[Quoted text hidden]
[Quoted text hidden]
[Quoted text hidden]
[Quoted text hidden]



--

Joseph L. Henderson, PE, PTOE

Principal

Sustainable Traffic Solutions, Inc.

823 West 124th Drive



Westminster, CO 80234

303.589.6875

joe@sustainabletrafficsolutions.com

sustainabletrafficsolutions.com

Licensed in CO, WY, and IA

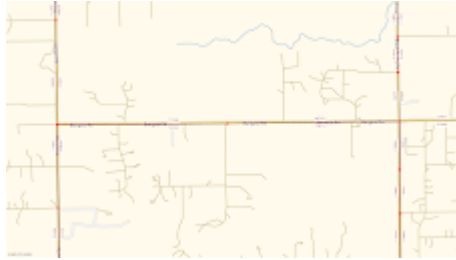

Burgess Rd Tot Volume 2045.png
343K

Joe Henderson <joe@sustainabletrafficsolutions.com>
To: William Mast <wmast@ppacg.org>

Wed, Aug 23, 2023 at 8:58 PM


Thanks. That's exactly what I needed.

[Quoted text hidden]

[Quoted text hidden]

[Quoted text hidden]



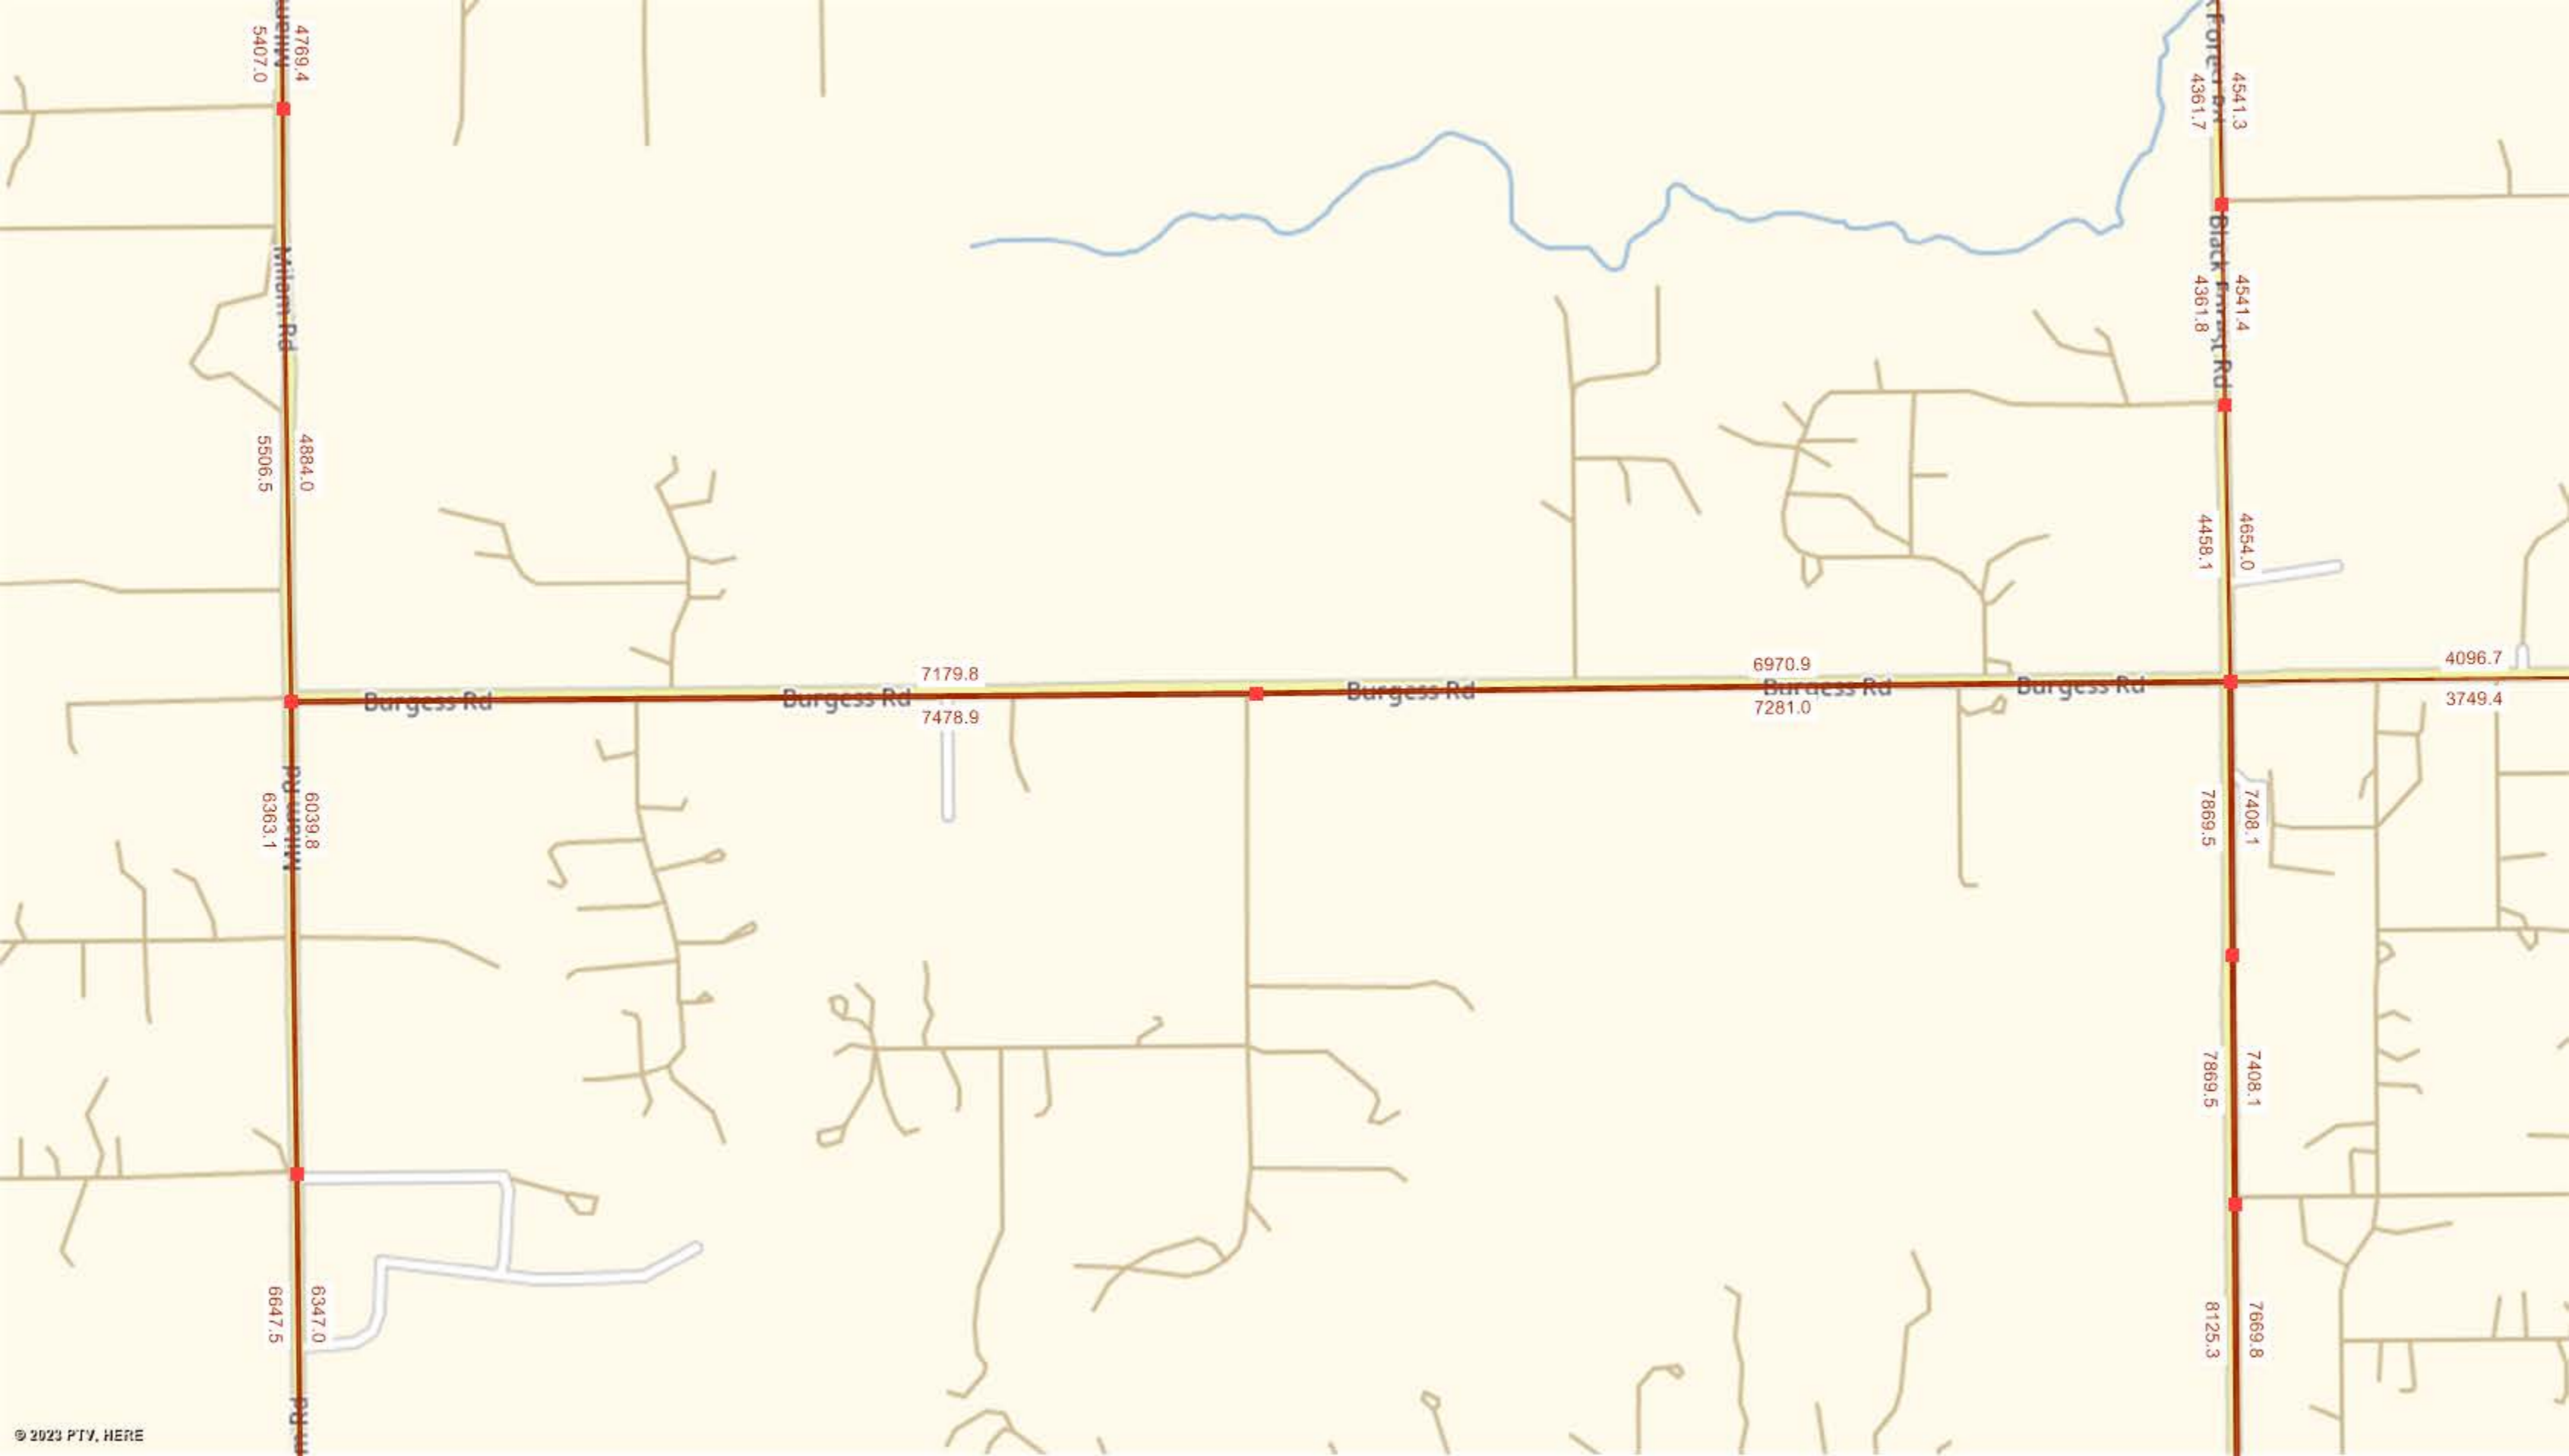

Appendix C

Traffic Count Data


Location: 1 MILAM ROAD & BURGESS ROAD AM

Date: Wednesday, July 19, 2023


Peak Hour: 08:30 AM - 09:30 AM

Peak 15-Minutes: 09:00 AM - 09:15 AM


Peak Hour - Motorized Vehicles

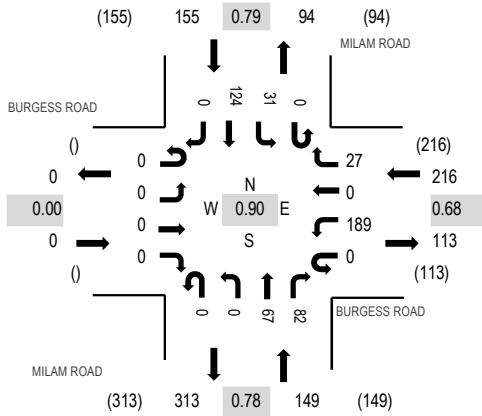

Peak Hour - Bicycles

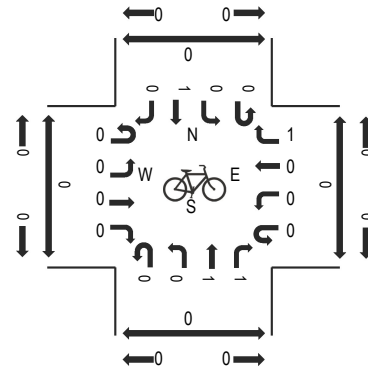

Peak Hour - Pedestrians

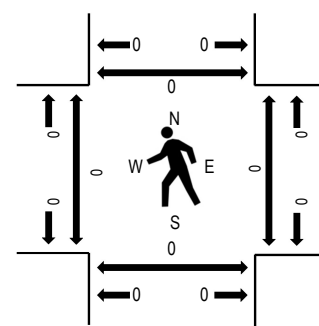

Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

| Interval Start Time | BURGESS ROAD Eastbound | | | | BURGESS ROAD Westbound | | | | MILAM ROAD Northbound | | | | MILAM ROAD Southbound | | | | Total | Rolling Hour | Pedestrian Crossings | | | |
|------------------------|---------------------------|------|------|-------|---------------------------|------|------|-------|--------------------------|------|------|-------|--------------------------|------|------|-------|-------|-----------------|----------------------|------|-------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | | West | East | South | North |
| 8:30 AM | 0 | 0 | 0 | 0 | 0 | 49 | 0 | 5 | 0 | 0 | 18 | 18 | 0 | 3 | 24 | 0 | 117 | 520 | 0 | 0 | 0 | 0 |
| 8:45 AM | 0 | 0 | 0 | 0 | 0 | 34 | 0 | 3 | 0 | 0 | 15 | 24 | 0 | 10 | 39 | 0 | 125 | | 0 | 0 | 0 | 0 |
| 9:00 AM | 0 | 0 | 0 | 0 | 0 | 66 | 0 | 13 | 0 | 0 | 13 | 13 | 0 | 9 | 30 | 0 | 144 | | 0 | 0 | 0 | 0 |
| 9:15 AM | 0 | 0 | 0 | 0 | 0 | 40 | 0 | 6 | 0 | 0 | 21 | 27 | 0 | 9 | 31 | 0 | 134 | | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 0 | 0 | 0 | 189 | 0 | 27 | 0 | 0 | 67 | 82 | 0 | 31 | 124 | 0 | 520 | | 0 | 0 | 0 | 0 |
| Peak Hour | 0 | 0 | 0 | 0 | 0 | 189 | 0 | 27 | 0 | 0 | 67 | 82 | 0 | 31 | 124 | 0 | 520 | | 0 | 0 | 0 | 0 |


Location: 2 BLACK FOREST ROAD & BURGESS ROAD AM

Date: Wednesday, July 19, 2023


Peak Hour: 08:30 AM - 09:30 AM

Peak 15-Minutes: 09:15 AM - 09:30 AM


Peak Hour - Motorized Vehicles

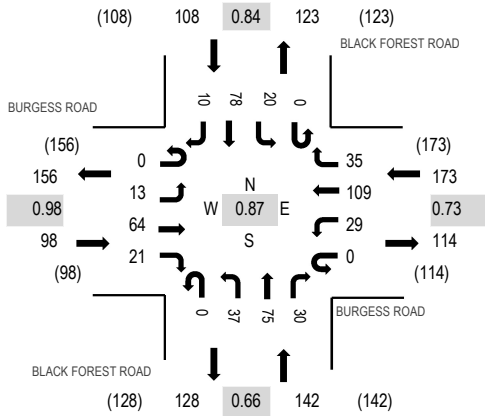

Peak Hour - Bicycles

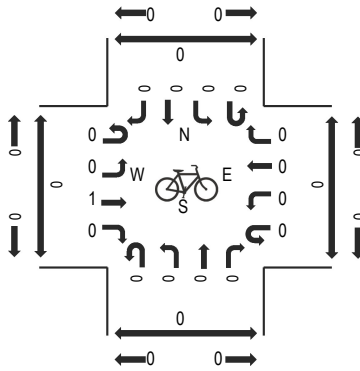

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

| Interval Start Time | BURGESS ROAD Eastbound | | | | BURGESS ROAD Westbound | | | | BLACK FOREST ROAD Northbound | | | | BLACK FOREST ROAD Southbound | | | | Total | Rolling Hour | Pedestrian Crossings | | | |
|------------------------|---------------------------|------|------|-------|---------------------------|------|------|-------|---------------------------------|------|------|-------|---------------------------------|------|------|-------|-------|-----------------|----------------------|------|-------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | | West | East | South | North |
| 8:30 AM | 0 | 3 | 14 | 6 | 0 | 9 | 40 | 10 | 0 | 3 | 17 | 3 | 0 | 3 | 20 | 4 | 132 | 521 | 0 | 0 | 0 | 0 |
| 8:45 AM | 0 | 5 | 13 | 7 | 0 | 5 | 22 | 11 | 0 | 9 | 22 | 3 | 0 | 4 | 20 | 3 | 124 | | 0 | 0 | 0 | 0 |
| 9:00 AM | 0 | 4 | 18 | 3 | 0 | 8 | 22 | 7 | 0 | 12 | 9 | 10 | 0 | 5 | 17 | 0 | 115 | | 0 | 0 | 0 | 0 |
| 9:15 AM | 0 | 1 | 19 | 5 | 0 | 7 | 25 | 7 | 0 | 13 | 27 | 14 | 0 | 8 | 21 | 3 | 150 | | 0 | 0 | 0 | 0 |
| Count Total | 0 | 13 | 64 | 21 | 0 | 29 | 109 | 35 | 0 | 37 | 75 | 30 | 0 | 20 | 78 | 10 | 521 | | 0 | 0 | 0 | 0 |
| Peak Hour | 0 | 13 | 64 | 21 | 0 | 29 | 109 | 35 | 0 | 37 | 75 | 30 | 0 | 20 | 78 | 10 | 521 | | 0 | 0 | 0 | 0 |


Location: 1 MILAM ROAD & BURGESS ROAD PM

Date: Wednesday, July 19, 2023


Peak Hour: 02:45 PM - 03:45 PM

Peak 15-Minutes: 03:30 PM - 03:45 PM


Peak Hour - Motorized Vehicles

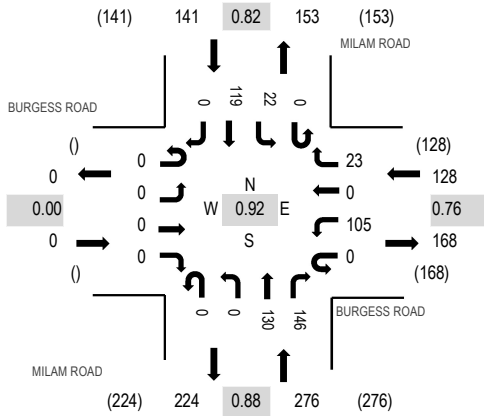

Peak Hour - Bicycles

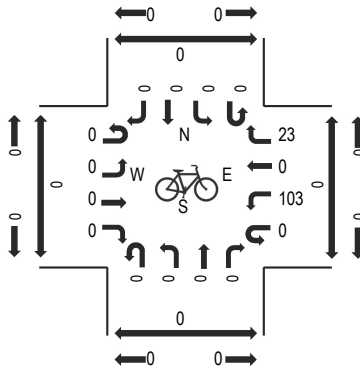

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

| Interval Start Time | BURGESS ROAD Eastbound | | | | BURGESS ROAD Westbound | | | | MILAM ROAD Northbound | | | | MILAM ROAD Southbound | | | | Total | Rolling Hour | Pedestrian Crossings | | | |
|------------------------|---------------------------|------|------|-------|---------------------------|------|------|-------|--------------------------|------|------|-------|--------------------------|------|------|-------|-------|-----------------|----------------------|------|-------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | | West | East | South | North |
| 2:45 PM | 0 | 0 | 0 | 0 | 0 | 22 | 0 | 4 | 0 | 0 | 28 | 26 | 0 | 6 | 37 | 0 | 123 | 545 | 0 | 0 | 0 | 0 |
| 3:00 PM | 0 | 0 | 0 | 0 | 0 | 25 | 0 | 5 | 0 | 0 | 38 | 32 | 0 | 6 | 33 | 0 | 139 | | 0 | 0 | 0 | 0 |
| 3:15 PM | 0 | 0 | 0 | 0 | 0 | 22 | 0 | 8 | 0 | 0 | 35 | 43 | 0 | 3 | 24 | 0 | 135 | | 0 | 0 | 0 | 0 |
| 3:30 PM | 0 | 0 | 0 | 0 | 0 | 36 | 0 | 6 | 0 | 0 | 29 | 45 | 0 | 7 | 25 | 0 | 148 | | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 0 | 0 | 0 | 105 | 0 | 23 | 0 | 0 | 130 | 146 | 0 | 22 | 119 | 0 | 545 | | 0 | 0 | 0 | 0 |
| Peak Hour | 0 | 0 | 0 | 0 | 0 | 105 | 0 | 23 | 0 | 0 | 130 | 146 | 0 | 22 | 119 | 0 | 545 | | 0 | 0 | 0 | 0 |


Location: 2 BLACK FOREST ROAD & BURGESS ROAD PM

Date: Wednesday, July 19, 2023


Peak Hour: 02:45 PM - 03:45 PM

Peak 15-Minutes: 03:15 PM - 03:30 PM


Peak Hour - Motorized Vehicles

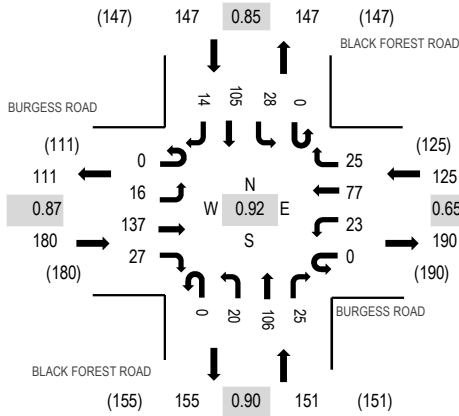

Peak Hour - Bicycles

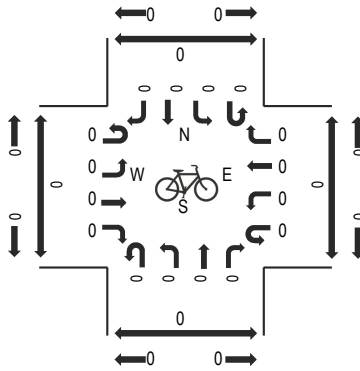

Peak Hour - Pedestrians

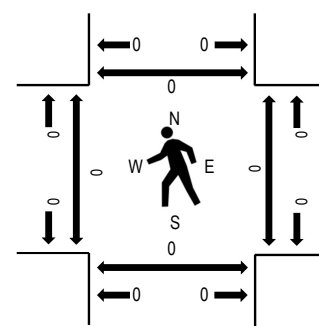

Note: Total study counts contained in parentheses.



Traffic Counts - Motorized Vehicles

| Interval Start Time | BURGESS ROAD Eastbound | | | | BURGESS ROAD Westbound | | | | BLACK FOREST ROAD Northbound | | | | BLACK FOREST ROAD Southbound | | | | Total | Rolling Hour | Pedestrian Crossings | | | |
|------------------------|---------------------------|------|------|-------|---------------------------|------|------|-------|---------------------------------|------|------|-------|---------------------------------|------|------|-------|-------|-----------------|----------------------|------|-------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | | West | East | South | North |
| 2:45 PM | 0 | 3 | 37 | 6 | 0 | 5 | 11 | 9 | 0 | 2 | 22 | 8 | 0 | 7 | 28 | 4 | 142 | 603 | 0 | 0 | 0 | 0 |
| 3:00 PM | 0 | 4 | 29 | 4 | 0 | 6 | 14 | 3 | 0 | 7 | 27 | 8 | 0 | 9 | 30 | 4 | 145 | | 0 | 0 | 0 | 0 |
| 3:15 PM | 0 | 3 | 37 | 12 | 0 | 8 | 29 | 11 | 0 | 3 | 31 | 3 | 0 | 4 | 19 | 3 | 163 | | 0 | 0 | 0 | 0 |
| 3:30 PM | 0 | 6 | 34 | 5 | 0 | 4 | 23 | 2 | 0 | 8 | 26 | 6 | 0 | 8 | 28 | 3 | 153 | | 0 | 0 | 0 | 0 |
| Count Total | 0 | 16 | 137 | 27 | 0 | 23 | 77 | 25 | 0 | 20 | 106 | 25 | 0 | 28 | 105 | 14 | 603 | | 0 | 0 | 0 | 0 |
| Peak Hour | 0 | 16 | 137 | 27 | 0 | 23 | 77 | 25 | 0 | 20 | 106 | 25 | 0 | 28 | 105 | 14 | 603 | | 0 | 0 | 0 | 0 |

Vehicle Volume Report - Hourly

Site Description: BURGESS RD E.O. HIGH MEADOWS DR
 Site Number: 3
 Start Date: 7/19/2023
 End Date: 7/19/2023

| Time | Monday | | | Tuesday | | | Wednesday | | | Thursday | | | Friday | | | Saturday | | | Sunday | | | 3 Day Avg | | 5 Day Avg | | 7 Day Avg | |
|---------------------|---------|----|-------|---------|----|-------|-----------|---------|--------|----------|----|-------|---------|----|-------|----------|----|-------|---------|----|-------|-----------|----|-----------|----|-----------|----|
| | 7/24/23 | | | 7/25/23 | | | 7/19/23 | | | 7/20/23 | | | 7/21/23 | | | 7/22/23 | | | 7/23/23 | | | Tue-Thu | | Mon-Fri | | Mon-Sun | |
| | EB | WB | Total | EB | WB | Total | EB | WB | Total | EB | WB | Total | EB | WB | Total | EB | WB | Total | EB | WB | Total | EB | WB | EB | WB | EB | WB |
| 12:00 AM | - | - | - | - | - | - | 10 | 5 | 15 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 1:00 AM | - | - | - | - | - | - | 4 | 1 | 5 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 2:00 AM | - | - | - | - | - | - | 1 | 1 | 2 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 3:00 AM | - | - | - | - | - | - | 3 | 0 | 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 4:00 AM | - | - | - | - | - | - | 3 | 16 | 19 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 5:00 AM | - | - | - | - | - | - | 5 | 39 | 44 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 6:00 AM | - | - | - | - | - | - | 33 | 139 | 172 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 7:00 AM | - | - | - | - | - | - | 65 | 234 | 299 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 8:00 AM | - | - | - | - | - | - | 108 | 239 | 347 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 9:00 AM | - | - | - | - | - | - | 123 | 204 | 327 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 10:00 AM | - | - | - | - | - | - | 130 | 157 | 287 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 11:00 AM | - | - | - | - | - | - | 148 | 161 | 309 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 12:00 PM | - | - | - | - | - | - | 145 | 162 | 307 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 1:00 PM | - | - | - | - | - | - | 149 | 145 | 294 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 2:00 PM | - | - | - | - | - | - | 188 | 110 | 298 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 3:00 PM | - | - | - | - | - | - | 190 | 154 | 344 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 4:00 PM | - | - | - | - | - | - | 261 | 112 | 373 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 5:00 PM | - | - | - | - | - | - | 265 | 138 | 403 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 6:00 PM | - | - | - | - | - | - | 199 | 107 | 306 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 7:00 PM | - | - | - | - | - | - | 121 | 67 | 188 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 8:00 PM | - | - | - | - | - | - | 99 | 41 | 140 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 9:00 PM | - | - | - | - | - | - | 101 | 33 | 134 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 10:00 PM | - | - | - | - | - | - | 38 | 17 | 55 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 11:00 PM | - | - | - | - | - | - | 15 | 5 | 20 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 6:00 AM - 9:00 AM | - | - | - | - | - | - | 206 | 612 | 818 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 3:00 PM - 6:00 PM | - | - | - | - | - | - | 716 | 404 | 1120 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 6:00 AM - 7:00 PM | - | - | - | - | - | - | 2004 | 2062 | 4066 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 12:00 AM - 12:00 AM | - | - | - | - | - | - | 2404 | 2287 | 4691 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| Percent | - | - | - | - | - | - | 51.2% | 48.8% | 100.0% | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| AM Peak | - | - | - | - | - | - | 8:00 AM | 9:00 AM | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| PM Peak | - | - | - | - | - | - | 5:00 PM | 6:00 PM | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |

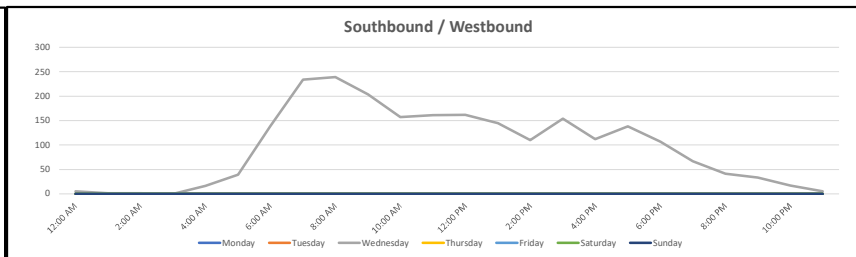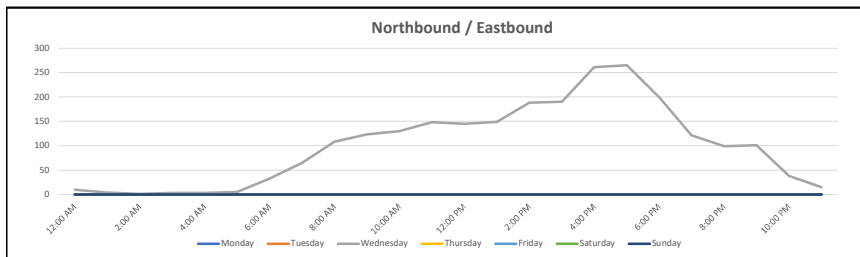

Vehicle Classification Report - Hourly

Site Description: BURGESS RD E.O. HIGH MEADOWS DR
Site Number: 3
Start Date: 7/19/2023
End Date: 7/19/2023

| FHWA Vehicle Classification | |
|--|--|
| Class 1 - Motorcycles | Class 8 - Four or Fewer Axle Single-Trailer Trucks |
| Class 2 - Passenger Cars | Class 9 - Five-Axle Single-Trailer Trucks |
| Class 3 - Other Two-Axle, Four-Tire Single Unit Vehicles | Class 10 - Six or More Axle Single-Trailer Trucks |
| Class 4 - Buses | Class 11 - Five or fewer Axle Multi-Trailer Trucks |
| Class 5 - Two-Axle, Six-Tire, Single-Unit Trucks | Class 12 - Six-Axle Multi-Trailer Trucks |
| Class 6 - Three-Axle Single-Unit Trucks | Class 13 - Seven or More Axle Multi-Trailer Trucks |
| Class 7 - Four or More Axle Single-Unit Trucks | |

| FHWA Vehicle Classification - Total Study | | | | | | | | | | | | | | |
|---|---------------|-------------|--------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Total | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| Eastbound | 2404 | 10 | 1606 | 655 | 1 | 122 | 6 | 0 | 3 | 1 | 0 | 0 | 0 | 0 |
| <i>Percent</i> | <i>100.0%</i> | <i>0.4%</i> | <i>66.8%</i> | <i>27.2%</i> | <i>0.0%</i> | <i>5.1%</i> | <i>0.2%</i> | <i>0.0%</i> | <i>0.1%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> |
| Westbound | 2287 | 11 | 1452 | 620 | 1 | 186 | 11 | 0 | 2 | 3 | 0 | 0 | 1 | 0 |
| <i>Percent</i> | <i>100.0%</i> | <i>0.5%</i> | <i>63.5%</i> | <i>27.1%</i> | <i>0.0%</i> | <i>8.1%</i> | <i>0.5%</i> | <i>0.0%</i> | <i>0.1%</i> | <i>0.1%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> |
| Total | 4691 | 21 | 3058 | 1275 | 2 | 308 | 17 | 0 | 5 | 4 | 0 | 0 | 1 | 0 |
| <i>Percent</i> | <i>100.0%</i> | <i>0.4%</i> | <i>65.2%</i> | <i>27.2%</i> | <i>0.0%</i> | <i>6.6%</i> | <i>0.4%</i> | <i>0.0%</i> | <i>0.1%</i> | <i>0.1%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> | <i>0.0%</i> |

Site Description: BURGESS RD E.O. HIGH MEADOWS DR
 Site Number: 3
 Start Date: 7/19/2023
 End Date: 7/19/2023

Vehicle Classification Report (Eastbound - 07/19/2023)

| Wednesday | Total | Eastbound | | | | | | | | | | | | |
|---------------------|-------|-----------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| | | Classes | | | | | | | | | | | | |
| 7/19/23 | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| 12:00 AM | 10 | 0 | 5 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1:00 AM | 4 | 0 | 3 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2:00 AM | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3:00 AM | 3 | 0 | 2 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 4:00 AM | 3 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 5:00 AM | 5 | 0 | 4 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 AM | 33 | 0 | 26 | 4 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7:00 AM | 65 | 0 | 47 | 13 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 8:00 AM | 108 | 1 | 70 | 34 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:00 AM | 123 | 0 | 77 | 38 | 0 | 7 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 10:00 AM | 130 | 1 | 88 | 31 | 0 | 8 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 11:00 AM | 148 | 1 | 97 | 40 | 0 | 9 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| 12:00 PM | 145 | 0 | 90 | 43 | 0 | 11 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1:00 PM | 149 | 0 | 98 | 45 | 0 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2:00 PM | 188 | 0 | 120 | 56 | 0 | 9 | 2 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 3:00 PM | 190 | 1 | 127 | 45 | 0 | 16 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 4:00 PM | 261 | 1 | 176 | 70 | 1 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 5:00 PM | 265 | 0 | 170 | 82 | 0 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 PM | 199 | 2 | 121 | 67 | 0 | 8 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 7:00 PM | 121 | 1 | 83 | 32 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 8:00 PM | 99 | 0 | 70 | 26 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:00 PM | 101 | 1 | 85 | 13 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 10:00 PM | 38 | 0 | 34 | 3 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 PM | 15 | 0 | 10 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 AM - 9:00 AM | 206 | 1 | 143 | 51 | 0 | 11 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3:00 PM - 6:00 PM | 716 | 2 | 473 | 197 | 1 | 42 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 AM - 7:00 PM | 2004 | 7 | 1307 | 568 | 1 | 111 | 6 | 0 | 3 | 1 | 0 | 0 | 0 | 0 |
| 12:00 AM - 12:00 AM | 2404 | 10 | 1606 | 655 | 1 | 122 | 6 | 0 | 3 | 1 | 0 | 0 | 0 | 0 |
| Percent | 100% | 0.4% | 66.8% | 27.2% | 0.0% | 5.1% | 0.2% | 0.0% | 0.1% | 0.0% | 0.0% | 0.0% | 0.0% | 0.0% |

Site Description: BURGESS RD E.O. HIGH MEADOWS DR
 Site Number: 3
 Start Date: 7/19/2023
 End Date: 7/19/2023

Vehicle Classification Report (Westbound - 07/19/2023)

| Wednesday | Total | Westbound | | | | | | | | | | | | |
|---------------------|-------|-----------|------|-----|---|-----|----|---|---|---|----|----|----|----|
| | | Classes | | | | | | | | | | | | |
| 7/19/23 | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| 12:00 AM | 5 | 0 | 3 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1:00 AM | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2:00 AM | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3:00 AM | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 4:00 AM | 16 | 0 | 12 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 5:00 AM | 39 | 0 | 29 | 6 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 AM | 139 | 1 | 92 | 34 | 0 | 11 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7:00 AM | 234 | 0 | 164 | 50 | 0 | 19 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 8:00 AM | 239 | 1 | 174 | 51 | 1 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:00 AM | 204 | 2 | 143 | 40 | 0 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 10:00 AM | 157 | 1 | 116 | 33 | 0 | 5 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 AM | 161 | 0 | 124 | 27 | 0 | 8 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 |
| 12:00 PM | 162 | 2 | 103 | 49 | 0 | 6 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 1:00 PM | 145 | 1 | 103 | 34 | 0 | 6 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| 2:00 PM | 110 | 0 | 74 | 24 | 0 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3:00 PM | 154 | 0 | 117 | 27 | 0 | 7 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 4:00 PM | 112 | 1 | 80 | 24 | 0 | 5 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 5:00 PM | 138 | 0 | 58 | 59 | 0 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 PM | 107 | 0 | 14 | 67 | 0 | 25 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7:00 PM | 67 | 1 | 10 | 40 | 0 | 15 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 8:00 PM | 41 | 0 | 7 | 28 | 0 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:00 PM | 33 | 1 | 15 | 13 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 10:00 PM | 17 | 0 | 9 | 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 PM | 5 | 0 | 3 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 AM - 9:00 AM | 612 | 2 | 430 | 135 | 1 | 42 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3:00 PM - 6:00 PM | 404 | 1 | 255 | 110 | 0 | 33 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:00 AM - 7:00 PM | 2062 | 9 | 1362 | 519 | 1 | 155 | 11 | 0 | 1 | 3 | 0 | 0 | 1 | 0 |
| 12:00 AM - 12:00 AM | 2287 | 11 | 1452 | 620 | 1 | 186 | 11 | 0 | 2 | 3 | 0 | 0 | 1 | 0 |
| Percent | 0% | - | - | - | - | - | - | - | - | - | - | - | - | - |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Pedestrian Crossing | | | | | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|---------------------|------|------|-------|-------|-------|-------|------|------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | Total | North | South | East | West |
| 6:00 | 0 | 0 | 3 | 2 | 0 | 0 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 19 | 0 | 4 | 34 | 0 | 0 | 0 | 0 |
| 6:15 | 0 | 0 | 5 | 6 | 0 | 0 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 2 | 56 | 0 | 0 | 0 | 0 |
| 6:30 | 0 | 0 | 5 | 1 | 0 | 0 | 11 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 7 | 65 | 0 | 0 | 0 | 0 |
| 6:45 | 0 | 0 | 8 | 10 | 0 | 1 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 57 | 0 | 3 | 104 | 0 | 0 | 0 | 0 |
| 7:00 | 0 | 0 | 7 | 14 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 61 | 0 | 6 | 118 | 0 | 0 | 0 | 0 |
| 7:15 | 0 | 0 | 18 | 17 | 0 | 4 | 37 | 0 | 0 | 0 | 0 | 0 | 0 | 75 | 0 | 1 | 152 | 0 | 0 | 0 | 0 |
| 7:30 | 0 | 0 | 19 | 31 | 0 | 7 | 36 | 0 | 0 | 0 | 0 | 0 | 0 | 68 | 0 | 7 | 168 | 0 | 0 | 0 | 0 |
| 7:45 | 0 | 0 | 26 | 33 | 0 | 3 | 41 | 0 | 0 | 0 | 0 | 0 | 0 | 71 | 0 | 12 | 186 | 0 | 0 | 0 | 0 |
| 8:00 | 0 | 0 | 20 | 28 | 0 | 6 | 31 | 0 | 0 | 0 | 0 | 0 | 0 | 64 | 0 | 4 | 153 | 0 | 0 | 0 | 0 |
| 8:15 | 0 | 0 | 17 | 40 | 0 | 4 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 47 | 0 | 3 | 133 | 0 | 0 | 0 | 0 |
| 8:30 | 0 | 0 | 16 | 50 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 62 | 0 | 6 | 164 | 0 | 0 | 0 | 0 |
| 8:45 | 0 | 0 | 16 | 50 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 62 | 0 | 6 | 164 | 0 | 0 | 0 | 0 |
| 9:00 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 | 0 | 0 | 0 | 0 |
| 9:15 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 | 0 | 0 | 0 | 0 |
| 9:30 | 0 | 0 | 13 | 24 | 0 | 1 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 47 | 0 | 3 | 108 | 0 | 0 | 0 | 0 |
| 9:45 | 0 | 0 | 12 | 23 | 0 | 3 | 26 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 101 | 0 | 0 | 0 | 0 |
| 10:00 | 0 | 0 | 12 | 23 | 0 | 3 | 26 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 101 | 0 | 0 | 0 | 0 |
| 10:15 | 0 | 0 | 11 | 27 | 0 | 4 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 28 | 0 | 3 | 95 | 0 | 0 | 0 | 0 |
| 10:30 | 0 | 0 | 16 | 24 | 0 | 3 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 47 | 0 | 2 | 106 | 0 | 0 | 0 | 0 |
| 10:45 | 0 | 0 | 18 | 27 | 0 | 2 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 50 | 0 | 5 | 124 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 18 | 27 | 0 | 2 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 50 | 0 | 5 | 124 | 0 | 0 | 0 | 0 |
| 11:15 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 | 0 | 0 | 0 | 0 |
| 11:30 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 | 0 | 0 | 0 | 0 |
| 11:45 | 0 | 0 | 16 | 31 | 0 | 5 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 103 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 0 | 22 | 31 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 8 | 116 | 0 | 0 | 0 | 0 |
| 12:15 | 0 | 0 | 22 | 31 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 8 | 116 | 0 | 0 | 0 | 0 |
| 12:30 | 0 | 1 | 22 | 34 | 0 | 3 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 20 | 0 | 8 | 109 | 0 | 0 | 0 | 0 |
| 12:45 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 | 0 | 0 | 0 | 0 |
| 13:15 | 0 | 1 | 13 | 37 | 0 | 6 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 27 | 0 | 3 | 108 | 0 | 0 | 0 | 0 |
| 13:30 | 0 | 0 | 13 | 29 | 0 | 6 | 16 | 0 | 0 | 1 | 0 | 0 | 0 | 39 | 0 | 3 | 107 | 0 | 0 | 0 | 0 |
| 13:45 | 0 | 0 | 15 | 35 | 0 | 4 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 23 | 0 | 2 | 96 | 0 | 0 | 0 | 0 |
| 14:00 | 0 | 0 | 19 | 42 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 4 | 117 | 0 | 0 | 0 | 0 |
| 14:15 | 0 | 0 | 20 | 41 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 5 | 120 | 0 | 0 | 0 | 0 |
| 14:30 | 0 | 0 | 13 | 38 | 0 | 8 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 0 | 5 | 112 | 0 | 0 | 0 | 0 |
| 14:45 | 0 | 0 | 16 | 35 | 0 | 1 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 2 | 123 | 0 | 0 | 0 | 0 |
| 15:00 | 0 | 0 | 17 | 49 | 0 | 9 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 132 | 0 | 0 | 0 | 0 |
| 15:15 | 0 | 0 | 29 | 56 | 0 | 6 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 50 | 0 | 8 | 171 | 0 | 0 | 0 | 0 |
| 15:30 | 0 | 0 | 30 | 69 | 0 | 9 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 60 | 0 | 8 | 192 | 0 | 0 | 0 | 0 |
| 15:45 | 0 | 0 | 30 | 49 | 0 | 8 | 24 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 5 | 153 | 0 | 0 | 0 | 0 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | Pedestrian Crossing | | | | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|---------------------|------|------|-------|-------|-------|------|------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right | North | South | East | West |
| 16:00 | 0 | 0 | 31 | 81 | 0 | 17 | 26 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 3 | 202 | 0 | 0 | 0 | 0 |
| 16:15 | 0 | 0 | 44 | 61 | 0 | 6 | 34 | 0 | 0 | 0 | 0 | 0 | 0 | 31 | 0 | 6 | 182 | 0 | 0 | 0 | 0 |
| 16:30 | 0 | 0 | 33 | 76 | 0 | 7 | 26 | 0 | 0 | 0 | 1 | 0 | 1 | 35 | 0 | 1 | 180 | 0 | 0 | 0 | 0 |
| 16:45 | 0 | 0 | 25 | 67 | 0 | 5 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 1 | 3 | 159 | 0 | 0 | 0 | 0 |
| 17:00 | 0 | 0 | 36 | 65 | 0 | 6 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 160 | 0 | 0 | 0 | 0 |
| 17:15 | 0 | 0 | 31 | 76 | 0 | 7 | 39 | 0 | 0 | 0 | 0 | 0 | 0 | 43 | 0 | 1 | 197 | 0 | 0 | 0 | 0 |
| 17:30 | 0 | 0 | 47 | 69 | 0 | 8 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 6 | 183 | 0 | 0 | 0 | 0 |
| 17:45 | 0 | 0 | 30 | 50 | 0 | 6 | 15 | 0 | 0 | 0 | 0 | 0 | 0 | 38 | 0 | 1 | 140 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 2 | 938 | 1819 | 0 | 233 | 1047 | 2 | 0 | 1 | 3 | 1 | 1 | 1947 | 1 | 221 | 6216 | 0 | 0 | 0 | 0 |
| % Trucks | 0% | 0% | 1% | 1% | 0% | 3% | 1% | 0% | 0% | 0% | 0% | 0% | 0% | 1% | 0% | 1% | 1% | --- | --- | --- | --- |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | Pedestrian Crossing | | | | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|---------------------|------|------|-------|-------|-------|------|------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right | North | South | East | West |
| 6:00 | 0 | 0 | 21 | 19 | 0 | 1 | 56 | 0 | 0 | 0 | 0 | 0 | 0 | 146 | 0 | 16 | 259 | 0 | 0 | 0 | 0 |
| 7:00 | 0 | 0 | 70 | 95 | 0 | 19 | 139 | 0 | 0 | 0 | 0 | 0 | 0 | 275 | 0 | 26 | 624 | 0 | 0 | 0 | 0 |
| 8:00 | 0 | 0 | 69 | 168 | 0 | 20 | 103 | 0 | 0 | 0 | 0 | 0 | 0 | 235 | 0 | 19 | 614 | 0 | 0 | 0 | 0 |
| 9:00 | 0 | 0 | 55 | 93 | 0 | 10 | 72 | 1 | 0 | 0 | 0 | 0 | 0 | 165 | 0 | 23 | 419 | 0 | 0 | 0 | 0 |
| 10:00 | 0 | 0 | 57 | 101 | 0 | 12 | 82 | 1 | 0 | 0 | 1 | 1 | 0 | 155 | 0 | 16 | 426 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 78 | 164 | 0 | 15 | 95 | 0 | 0 | 0 | 1 | 0 | 0 | 137 | 0 | 17 | 507 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 1 | 81 | 125 | 0 | 23 | 71 | 0 | 0 | 0 | 0 | 0 | 0 | 110 | 0 | 26 | 437 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 1 | 56 | 130 | 0 | 22 | 72 | 0 | 0 | 1 | 0 | 0 | 0 | 115 | 0 | 10 | 407 | 0 | 0 | 0 | 0 |
| 14:00 | 0 | 0 | 68 | 156 | 0 | 17 | 77 | 0 | 0 | 0 | 0 | 0 | 0 | 138 | 0 | 16 | 472 | 0 | 0 | 0 | 0 |
| 15:00 | 0 | 0 | 106 | 223 | 0 | 32 | 83 | 0 | 0 | 0 | 0 | 0 | 0 | 177 | 0 | 27 | 648 | 0 | 0 | 0 | 0 |
| 16:00 | 0 | 0 | 133 | 285 | 0 | 35 | 107 | 0 | 0 | 0 | 1 | 0 | 1 | 147 | 1 | 13 | 723 | 0 | 0 | 0 | 0 |
| 17:00 | 0 | 0 | 144 | 260 | 0 | 27 | 90 | 0 | 0 | 0 | 0 | 0 | 0 | 147 | 0 | 12 | 680 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 2 | 938 | 1819 | 0 | 233 | 1047 | 2 | 0 | 1 | 3 | 1 | 1 | 1947 | 1 | 221 | 6216 | 0 | 0 | 0 | 0 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Passenger Vehicles

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 3 | 2 | 0 | 0 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 19 | 0 | 4 | 34 |
| 6:15 | 0 | 0 | 5 | 6 | 0 | 0 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 2 | 56 |
| 6:30 | 0 | 0 | 5 | 1 | 0 | 0 | 11 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 7 | 65 |
| 6:45 | 0 | 0 | 7 | 10 | 0 | 1 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 57 | 0 | 3 | 103 |
| 7:00 | 0 | 0 | 7 | 13 | 0 | 5 | 24 | 0 | 0 | 0 | 0 | 0 | 0 | 57 | 0 | 6 | 112 |
| 7:15 | 0 | 0 | 17 | 17 | 0 | 3 | 35 | 0 | 0 | 0 | 0 | 0 | 0 | 72 | 0 | 1 | 145 |
| 7:30 | 0 | 0 | 18 | 29 | 0 | 6 | 36 | 0 | 0 | 0 | 0 | 0 | 0 | 68 | 0 | 7 | 164 |
| 7:45 | 0 | 0 | 26 | 32 | 0 | 3 | 41 | 0 | 0 | 0 | 0 | 0 | 0 | 71 | 0 | 12 | 185 |
| 8:00 | 0 | 0 | 18 | 26 | 0 | 6 | 29 | 0 | 0 | 0 | 0 | 0 | 0 | 64 | 0 | 4 | 147 |
| 8:15 | 0 | 0 | 15 | 37 | 0 | 4 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 45 | 0 | 3 | 125 |
| 8:30 | 0 | 0 | 16 | 50 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 60 | 0 | 6 | 162 |
| 8:45 | 0 | 0 | 20 | 25 | 0 | 10 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 54 | 0 | 4 | 141 |
| 9:00 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 |
| 9:15 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 |
| 9:30 | 0 | 0 | 11 | 24 | 0 | 5 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 39 | 0 | 0 | 101 |
| 9:45 | 0 | 0 | 12 | 20 | 0 | 3 | 25 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 97 |
| 10:00 | 0 | 0 | 12 | 20 | 0 | 3 | 25 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 97 |
| 10:15 | 0 | 0 | 10 | 28 | 0 | 4 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 2 | 94 |
| 10:30 | 0 | 0 | 16 | 24 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 46 | 0 | 2 | 104 |
| 10:45 | 0 | 0 | 18 | 27 | 0 | 2 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 50 | 0 | 5 | 124 |
| 11:00 | 0 | 0 | 26 | 29 | 0 | 2 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 34 | 0 | 6 | 117 |
| 11:15 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 |
| 11:30 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 |
| 11:45 | 0 | 0 | 25 | 35 | 0 | 5 | 15 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 8 | 118 |
| 12:00 | 0 | 0 | 21 | 29 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 7 | 112 |
| 12:15 | 0 | 0 | 21 | 29 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 7 | 112 |
| 12:30 | 0 | 0 | 16 | 22 | 0 | 7 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 2 | 94 |
| 12:45 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 |
| 13:00 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 |
| 13:15 | 0 | 0 | 13 | 29 | 0 | 6 | 16 | 0 | 0 | 1 | 0 | 0 | 0 | 39 | 0 | 3 | 107 |
| 13:30 | 0 | 0 | 13 | 29 | 0 | 6 | 16 | 0 | 0 | 1 | 0 | 0 | 0 | 39 | 0 | 3 | 107 |
| 13:45 | 0 | 0 | 13 | 35 | 0 | 3 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 22 | 0 | 2 | 92 |
| 14:00 | 0 | 0 | 19 | 42 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 116 |
| 14:15 | 0 | 0 | 19 | 41 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 31 | 0 | 5 | 118 |
| 14:30 | 0 | 0 | 13 | 38 | 0 | 7 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 0 | 5 | 111 |
| 14:45 | 0 | 0 | 16 | 35 | 0 | 1 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 40 | 0 | 2 | 122 |
| 15:00 | 0 | 0 | 17 | 49 | 0 | 9 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 132 |
| 15:15 | 0 | 0 | 29 | 55 | 0 | 6 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 50 | 0 | 8 | 170 |
| 15:30 | 0 | 0 | 29 | 65 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 59 | 0 | 8 | 184 |
| 15:45 | 0 | 0 | 29 | 49 | 0 | 8 | 24 | 0 | 0 | 0 | 0 | 0 | 0 | 36 | 0 | 5 | 151 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Passenger Vehicles

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 16:00 | 0 | 0 | 31 | 81 | 0 | 17 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 43 | 0 | 3 | 200 |
| 16:15 | 0 | 0 | 44 | 61 | 0 | 6 | 32 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 179 |
| 16:30 | 0 | 0 | 33 | 76 | 0 | 7 | 26 | 0 | 0 | 0 | 1 | 0 | 1 | 33 | 0 | 1 | 178 |
| 16:45 | 0 | 0 | 25 | 66 | 0 | 5 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 1 | 3 | 156 |
| 17:00 | 0 | 0 | 36 | 65 | 0 | 6 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 160 |
| 17:15 | 0 | 0 | 31 | 75 | 0 | 7 | 39 | 0 | 0 | 0 | 0 | 0 | 0 | 43 | 0 | 1 | 196 |
| 17:30 | 0 | 0 | 47 | 69 | 0 | 8 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 6 | 183 |
| 17:45 | 0 | 0 | 30 | 50 | 0 | 6 | 15 | 0 | 0 | 0 | 0 | 0 | 0 | 38 | 0 | 1 | 140 |
| Count Total | 0 | 0 | 936 | 1755 | 0 | 240 | 1019 | 2 | 0 | 2 | 2 | 0 | 1 | 1923 | 1 | 212 | 6093 |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 20 | 19 | 0 | 1 | 56 | 0 | 0 | 0 | 0 | 0 | 0 | 146 | 0 | 16 | 258 |
| 7:00 | 0 | 0 | 68 | 91 | 0 | 17 | 136 | 0 | 0 | 0 | 0 | 0 | 0 | 268 | 0 | 26 | 606 |
| 8:00 | 0 | 0 | 69 | 138 | 0 | 25 | 103 | 0 | 0 | 0 | 0 | 0 | 0 | 223 | 0 | 17 | 575 |
| 9:00 | 0 | 0 | 53 | 90 | 0 | 14 | 73 | 1 | 0 | 0 | 0 | 0 | 0 | 157 | 0 | 20 | 408 |
| 10:00 | 0 | 0 | 56 | 99 | 0 | 12 | 72 | 1 | 0 | 0 | 1 | 0 | 0 | 163 | 0 | 15 | 419 |
| 11:00 | 0 | 0 | 95 | 170 | 0 | 15 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 122 | 0 | 22 | 515 |
| 12:00 | 0 | 0 | 73 | 109 | 0 | 27 | 67 | 0 | 0 | 0 | 0 | 0 | 0 | 120 | 0 | 18 | 414 |
| 13:00 | 0 | 0 | 54 | 122 | 0 | 21 | 67 | 0 | 0 | 2 | 0 | 0 | 0 | 126 | 0 | 10 | 402 |
| 14:00 | 0 | 0 | 67 | 156 | 0 | 16 | 77 | 0 | 0 | 0 | 0 | 0 | 0 | 135 | 0 | 16 | 467 |
| 15:00 | 0 | 0 | 104 | 218 | 0 | 30 | 83 | 0 | 0 | 0 | 0 | 0 | 0 | 175 | 0 | 27 | 637 |
| 16:00 | 0 | 0 | 133 | 284 | 0 | 35 | 104 | 0 | 0 | 0 | 1 | 0 | 1 | 141 | 1 | 13 | 713 |
| 17:00 | 0 | 0 | 144 | 259 | 0 | 27 | 90 | 0 | 0 | 0 | 0 | 0 | 0 | 147 | 0 | 12 | 679 |
| Count Total | 0 | 0 | 936 | 1755 | 0 | 240 | 1019 | 2 | 0 | 2 | 2 | 0 | 1 | 1923 | 1 | 212 | 6093 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Trucks Less Than 40' Long

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:45 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 7:00 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 6 |
| 7:15 | 0 | 0 | 1 | 0 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 0 | 7 |
| 7:30 | 0 | 0 | 1 | 2 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 7:45 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 8:00 | 0 | 0 | 2 | 2 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 |
| 8:15 | 0 | 0 | 2 | 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 7 |
| 8:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 2 |
| 8:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:45 | 0 | 0 | 0 | 3 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 10:00 | 0 | 0 | 0 | 3 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 10:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 10:30 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |
| 10:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 11:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 4 |
| 12:15 | 0 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 4 |
| 12:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:45 | 0 | 0 | 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |
| 14:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 14:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 14:30 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 14:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 15:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15:15 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 15:30 | 0 | 0 | 1 | 4 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 7 |
| 15:45 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Trucks Less Than 40' Long

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |
| 16:15 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 3 |
| 16:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 2 |
| 16:45 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |
| 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:15 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 17:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 13 | 26 | 0 | 5 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 23 | 0 | 3 | 82 |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 7:00 | 0 | 0 | 2 | 4 | 0 | 2 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 7 | 0 | 0 | 18 |
| 8:00 | 0 | 0 | 4 | 4 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 15 |
| 9:00 | 0 | 0 | 0 | 3 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 10:00 | 0 | 0 | 0 | 3 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 7 |
| 11:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 12:00 | 0 | 0 | 2 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 8 |
| 13:00 | 0 | 0 | 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |
| 14:00 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 0 | 4 |
| 15:00 | 0 | 0 | 2 | 5 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 10 |
| 16:00 | 0 | 0 | 0 | 1 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 9 |
| 17:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| Count Total | 0 | 0 | 13 | 26 | 0 | 5 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 23 | 0 | 3 | 82 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Trucks Greater Than 40' Long

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 8:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 9:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 10:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14:00 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 15:00 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |

Appendix D

VISTRO Analysis Results

Year 2023 Traffic Volumes

Haven School TIS

Vistro File: C:\...\AM 9-12-24.vistro

Scenario 1 2023 AM

Report File: C:\...\2023 AM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.425 | 15.0 | C |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | NB Left | 0.141 | 6.0 | A |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Two-way stop | Delay (sec / veh): | 15.0 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | C |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.425 |

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↑↑ | | ↑ | | ↑ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 0 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Peak Hour Factor | 0.7800 | 0.7800 | 0.7900 | 0.7900 | 0.6800 | 0.6800 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 21 | 26 | 10 | 39 | 69 | 10 |
| Total Analysis Volume [veh/h] | 86 | 105 | 39 | 157 | 278 | 40 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | No |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|-------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.03 | 0.00 | 0.43 | 0.04 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.43 | 0.00 | 15.04 | 13.23 |
| Movement LOS | A | A | A | A | C | B |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.07 | 0.07 | 2.49 | 2.49 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 1.66 | 1.66 | 62.18 | 62.18 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.48 | | 14.81 | |
| Approach LOS | A | | A | | B | |
| d_I, Intersection Delay [s/veh] | 7.09 | | | | | |
| Intersection LOS | C | | | | | |

Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 6.0 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.141 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| | | | | | | | | | | | | |
| Base Volume Input [veh/h] | 37 | 75 | 30 | 20 | 78 | 10 | 13 | 64 | 21 | 29 | 109 | 35 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 15 | 0 | 0 | 5 | 0 | 0 | 11 | 0 | 0 | 18 |
| Total Hourly Volume [veh/h] | 37 | 75 | 15 | 20 | 78 | 5 | 13 | 64 | 10 | 29 | 109 | 17 |
| Peak Hour Factor | 0.6600 | 0.6600 | 0.6600 | 0.8400 | 0.8400 | 0.8400 | 0.9800 | 0.9800 | 0.9800 | 0.7300 | 0.7300 | 0.7300 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 14 | 28 | 6 | 6 | 23 | 1 | 3 | 16 | 3 | 10 | 37 | 6 |
| Total Analysis Volume [veh/h] | 56 | 114 | 23 | 24 | 93 | 6 | 13 | 65 | 10 | 40 | 149 | 23 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | Free Running |
| Actuation Type | Fully actuated |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 |
| g / C, Green / Cycle | 0.32 | 0.32 | 0.32 | 0.32 | 0.32 | 0.32 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 |
| (v / s)_i Volume / Saturation Flow Rate | 0.04 | 0.06 | 0.01 | 0.02 | 0.05 | 0.00 | 0.01 | 0.03 | 0.01 | 0.03 | 0.08 | 0.01 |
| s, saturation flow rate [veh/h] | 1296 | 1870 | 1589 | 1252 | 1870 | 1589 | 1213 | 1870 | 1589 | 1324 | 1870 | 1589 |
| c, Capacity [veh/h] | 582 | 594 | 505 | 562 | 594 | 505 | 555 | 621 | 528 | 623 | 621 | 528 |
| d1, Uniform Delay [s] | 7.52 | 5.66 | 5.39 | 7.50 | 5.59 | 5.33 | 7.43 | 5.28 | 5.13 | 6.94 | 5.53 | 5.17 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.07 | 0.16 | 0.04 | 0.03 | 0.12 | 0.01 | 0.02 | 0.07 | 0.01 | 0.04 | 0.20 | 0.03 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| X, volume / capacity | 0.10 | 0.19 | 0.05 | 0.04 | 0.16 | 0.01 | 0.02 | 0.10 | 0.02 | 0.06 | 0.24 | 0.04 |
| d, Delay for Lane Group [s/veh] | 7.59 | 5.82 | 5.43 | 7.53 | 5.71 | 5.34 | 7.45 | 5.35 | 5.14 | 6.99 | 5.73 | 5.20 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | No | No | No | Yes | No |
| 50th-Percentile Queue Length [veh/ln] | 0.10 | 0.12 | 0.02 | 0.04 | 0.09 | 0.01 | 0.02 | 0.06 | 0.01 | 0.06 | 0.14 | 0.02 |
| 50th-Percentile Queue Length [ft/ln] | 2.40 | 2.88 | 0.56 | 1.04 | 2.30 | 0.14 | 0.56 | 1.40 | 0.21 | 1.50 | 3.46 | 0.50 |
| 95th-Percentile Queue Length [veh/ln] | 0.17 | 0.21 | 0.04 | 0.07 | 0.17 | 0.01 | 0.04 | 0.10 | 0.02 | 0.11 | 0.25 | 0.04 |
| 95th-Percentile Queue Length [ft/ln] | 4.32 | 5.18 | 1.01 | 1.87 | 4.14 | 0.26 | 1.00 | 2.52 | 0.39 | 2.71 | 6.23 | 0.90 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 7.59 | 5.82 | 5.43 | 7.53 | 5.71 | 5.34 | 7.45 | 5.35 | 5.14 | 6.99 | 5.73 | 5.20 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 6.28 | | | 6.05 | | | 5.64 | | | 5.91 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 6.02 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.141 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|------|-------|--------|-------|-------|-------|-------|
| Vehicle Miles Traveled [mph] | 5.89 | 11.98 | 2.42 | 2.65 | 10.26 | 0.66 | 19.05 | 95.24 | 14.65 | 4.80 | 17.89 | 2.76 |
| Stops [stops/h] | 15.26 | 18.29 | 3.55 | 6.60 | 14.65 | 0.91 | 3.54 | 8.91 | 1.36 | 9.57 | 22.01 | 3.17 |
| Fuel consumption [US gal/h] | 0.48 | 0.77 | 0.15 | 0.21 | 0.64 | 0.04 | 0.72 | 3.45 | 0.53 | 0.34 | 1.06 | 0.16 |
| CO [g/h] | 33.41 | 54.04 | 10.66 | 14.65 | 44.88 | 2.83 | 50.10 | 240.88 | 37.02 | 23.80 | 74.14 | 11.08 |
| NOx [g/h] | 6.50 | 10.51 | 2.07 | 2.85 | 8.73 | 0.55 | 9.75 | 46.87 | 7.20 | 4.63 | 14.42 | 2.16 |
| VOC [g/h] | 7.74 | 12.52 | 2.47 | 3.40 | 10.40 | 0.66 | 11.61 | 55.83 | 8.58 | 5.51 | 17.18 | 2.57 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3534 | | | 3534 | | | 3534 | | | 3534 | | |
| d_b, Bicycle Delay [s] | 6.66 | | | 6.66 | | | 6.66 | | | 6.66 | | |
| I_b,int, Bicycle LOS Score for Intersection | 1.903 | | | 1.771 | | | 1.723 | | | 1.939 | | |
| Bicycle LOS | A | | | A | | | A | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Haven School TIS

Vistro File: C:\...\PM 9-12-24.vistro

Scenario 1 2023 PM

Report File: C:\...\2023 PM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.217 | 12.4 | B |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | SB Left | 0.150 | 5.9 | A |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
Analysis Method: HCM 7th Edition
Analysis Period: 15 minutes

Delay (sec / veh): 12.4
Level Of Service: B
Volume to Capacity (v/c): 0.217

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↑↑ | | ↑ | | ↑ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 0 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Peak Hour Factor | 0.8800 | 0.8800 | 0.8200 | 0.8200 | 0.7600 | 0.7600 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 37 | 41 | 7 | 36 | 35 | 8 |
| Total Analysis Volume [veh/h] | 148 | 166 | 27 | 145 | 138 | 30 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |



Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | No |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|-------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.02 | 0.00 | 0.22 | 0.03 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.54 | 0.00 | 12.43 | 10.78 |
| Movement LOS | A | A | A | A | B | B |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.05 | 0.05 | 0.99 | 0.99 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 1.14 | 1.14 | 24.64 | 24.64 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.18 | | 12.14 | |
| Approach LOS | A | | A | | B | |
| d_I, Intersection Delay [s/veh] | 3.43 | | | | | |
| Intersection LOS | B | | | | | |

Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 5.9 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.150 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | | | | | | | | | | | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Base Volume Input [veh/h] | 20 | 106 | 25 | 28 | 105 | 14 | 16 | 137 | 27 | 23 | 77 | 25 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 13 | 0 | 0 | 7 | 0 | 0 | 14 | 0 | 0 | 13 |
| Total Hourly Volume [veh/h] | 20 | 106 | 12 | 28 | 105 | 7 | 16 | 137 | 13 | 23 | 77 | 12 |
| Peak Hour Factor | 0.9000 | 0.9000 | 0.9000 | 0.8500 | 0.8500 | 0.8500 | 0.8700 | 0.8700 | 0.8700 | 0.6540 | 0.6540 | 0.6540 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 6 | 29 | 3 | 8 | 31 | 2 | 5 | 39 | 4 | 9 | 29 | 5 |
| Total Analysis Volume [veh/h] | 22 | 118 | 13 | 33 | 124 | 8 | 18 | 157 | 15 | 35 | 118 | 18 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | Free Running |
| Actuation Type | Fully actuated |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 6 | 6 | 6 | 6 | 6 | 6 | 7 | 7 | 7 | 7 | 7 | 7 |
| g / C, Green / Cycle | 0.30 | 0.30 | 0.30 | 0.30 | 0.30 | 0.30 | 0.32 | 0.32 | 0.32 | 0.32 | 0.32 | 0.32 |
| (v / s)_i Volume / Saturation Flow Rate | 0.02 | 0.06 | 0.01 | 0.03 | 0.07 | 0.01 | 0.01 | 0.08 | 0.01 | 0.03 | 0.06 | 0.01 |
| s, saturation flow rate [veh/h] | 1258 | 1870 | 1589 | 1259 | 1870 | 1589 | 1253 | 1870 | 1589 | 1213 | 1870 | 1589 |
| c, Capacity [veh/h] | 546 | 561 | 477 | 550 | 561 | 477 | 581 | 606 | 515 | 553 | 606 | 515 |
| d1, Uniform Delay [s] | 7.54 | 5.57 | 5.26 | 7.56 | 5.59 | 5.24 | 7.02 | 5.31 | 4.91 | 7.43 | 5.19 | 4.92 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.03 | 0.18 | 0.02 | 0.05 | 0.20 | 0.01 | 0.02 | 0.22 | 0.02 | 0.05 | 0.16 | 0.03 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| X, volume / capacity | 0.04 | 0.21 | 0.03 | 0.06 | 0.22 | 0.02 | 0.03 | 0.26 | 0.03 | 0.06 | 0.19 | 0.03 |
| d, Delay for Lane Group [s/veh] | 7.57 | 5.75 | 5.28 | 7.61 | 5.78 | 5.26 | 7.04 | 5.53 | 4.93 | 7.47 | 5.34 | 4.94 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | No | No | No | Yes | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.03 | 0.10 | 0.01 | 0.05 | 0.10 | 0.01 | 0.03 | 0.11 | 0.01 | 0.05 | 0.08 | 0.01 |
| 50th-Percentile Queue Length [ft/ln] | 0.87 | 2.46 | 0.26 | 1.30 | 2.60 | 0.16 | 0.63 | 2.70 | 0.24 | 1.34 | 1.94 | 0.28 |
| 95th-Percentile Queue Length [veh/ln] | 0.06 | 0.18 | 0.02 | 0.09 | 0.19 | 0.01 | 0.05 | 0.19 | 0.02 | 0.10 | 0.14 | 0.02 |
| 95th-Percentile Queue Length [ft/ln] | 1.56 | 4.43 | 0.46 | 2.34 | 4.68 | 0.28 | 1.13 | 4.85 | 0.42 | 2.40 | 3.49 | 0.51 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 7.57 | 5.75 | 5.28 | 7.61 | 5.78 | 5.26 | 7.04 | 5.53 | 4.93 | 7.47 | 5.34 | 4.94 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 5.97 | | | 6.12 | | | 5.63 | | | 5.74 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 5.85 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.150 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|-------|------|-------|-------|------|-------|--------|-------|-------|-------|------|
| Vehicle Miles Traveled [mph] | 2.31 | 12.40 | 1.37 | 3.64 | 13.68 | 0.88 | 26.37 | 230.04 | 21.98 | 4.20 | 14.17 | 2.16 |
| Stops [stops/h] | 5.91 | 16.76 | 1.75 | 8.86 | 17.72 | 1.07 | 4.26 | 18.37 | 1.61 | 9.10 | 13.22 | 1.93 |
| Fuel consumption [US gal/h] | 0.19 | 0.77 | 0.08 | 0.29 | 0.84 | 0.05 | 0.98 | 8.29 | 0.79 | 0.31 | 0.78 | 0.12 |
| CO [g/h] | 13.05 | 53.93 | 5.77 | 20.00 | 58.39 | 3.64 | 68.70 | 579.49 | 55.11 | 21.70 | 54.40 | 8.12 |
| NOx [g/h] | 2.54 | 10.49 | 1.12 | 3.89 | 11.36 | 0.71 | 13.37 | 112.75 | 10.72 | 4.22 | 10.58 | 1.58 |
| VOC [g/h] | 3.02 | 12.50 | 1.34 | 4.64 | 13.53 | 0.84 | 15.92 | 134.30 | 12.77 | 5.03 | 12.61 | 1.88 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3786 | | | 3786 | | | 3786 | | | 3786 | | |
| d_b, Bicycle Delay [s] | 8.43 | | | 8.43 | | | 8.43 | | | 8.43 | | |
| I_b,int, Bicycle LOS Score for Intersection | 1.834 | | | 1.843 | | | 1.896 | | | 1.863 | | |
| Bicycle LOS | A | | | A | | | A | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Year 2026 Traffic Volume Scenarios

Haven School TIS

Vistro File: C:\...\AM 9-12-24.vistro

Scenario 2 2026 Back AM

Report File: C:\...\2026 Back AM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.522 | 17.9 | C |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | EB Left | 0.156 | 6.2 | A |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
Analysis Method: HCM 7th Edition
Analysis Period: 15 minutes

Delay (sec / veh): 17.9
Level Of Service: C
Volume to Capacity (v/c): 0.522

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↑↑ | | ↑ | | ↑ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 0 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0600 | 1.0600 | 1.1200 | 1.1200 | 1.1700 | 1.1700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 71 | 87 | 35 | 139 | 221 | 32 |
| Peak Hour Factor | 0.7800 | 0.7800 | 0.7900 | 0.7900 | 0.6800 | 0.6800 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 23 | 28 | 11 | 44 | 81 | 12 |
| Total Analysis Volume [veh/h] | 91 | 112 | 44 | 176 | 325 | 47 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | No |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|-------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.03 | 0.00 | 0.52 | 0.05 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.44 | 0.00 | 17.88 | 15.82 |
| Movement LOS | A | A | A | A | C | C |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.08 | 0.08 | 3.62 | 3.62 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 1.88 | 1.88 | 90.46 | 90.46 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.49 | | 17.62 | |
| Approach LOS | A | | A | | C | |
| d_I, Intersection Delay [s/veh] | 8.66 | | | | | |
| Intersection LOS | C | | | | | |

Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 6.2 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.156 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Base Volume Input [veh/h] | 37 | 75 | 30 | 20 | 78 | 10 | 13 | 64 | 21 | 29 | 109 | 35 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 1.1700 | 1.1700 | 1.1700 | 1.0900 | 1.0900 | 1.0900 | 1.1700 | 1.1700 | 1.1700 | 1.0600 | 1.0600 | 1.0600 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 18 | 0 | 0 | 6 | 0 | 0 | 13 | 0 | 0 | 19 |
| Total Hourly Volume [veh/h] | 43 | 88 | 17 | 22 | 85 | 5 | 15 | 75 | 12 | 31 | 116 | 18 |
| Peak Hour Factor | 0.6600 | 0.6600 | 0.6600 | 0.8400 | 0.8400 | 0.8400 | 0.9800 | 0.9800 | 0.9800 | 0.7300 | 0.7300 | 0.7300 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 16 | 33 | 6 | 7 | 25 | 1 | 4 | 19 | 3 | 11 | 40 | 6 |
| Total Analysis Volume [veh/h] | 65 | 133 | 26 | 26 | 101 | 6 | 15 | 77 | 12 | 42 | 159 | 25 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | Free Running |
| Actuation Type | Fully actuated |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| g / C, Green / Cycle | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 |
| (v / s)_i Volume / Saturation Flow Rate | 0.05 | 0.07 | 0.02 | 0.02 | 0.05 | 0.00 | 0.01 | 0.04 | 0.01 | 0.03 | 0.09 | 0.02 |
| s, saturation flow rate [veh/h] | 1286 | 1870 | 1589 | 1227 | 1870 | 1589 | 1200 | 1870 | 1589 | 1308 | 1870 | 1589 |
| c, Capacity [veh/h] | 584 | 620 | 527 | 555 | 620 | 527 | 538 | 622 | 529 | 603 | 622 | 529 |
| d1, Uniform Delay [s] | 7.64 | 5.73 | 5.41 | 7.67 | 5.62 | 5.34 | 7.79 | 5.53 | 5.34 | 7.29 | 5.79 | 5.39 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.08 | 0.17 | 0.04 | 0.03 | 0.12 | 0.01 | 0.02 | 0.09 | 0.02 | 0.05 | 0.21 | 0.04 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| X, volume / capacity | 0.11 | 0.21 | 0.05 | 0.05 | 0.16 | 0.01 | 0.03 | 0.12 | 0.02 | 0.07 | 0.26 | 0.05 |
| d, Delay for Lane Group [s/veh] | 7.72 | 5.90 | 5.45 | 7.70 | 5.75 | 5.35 | 7.81 | 5.62 | 5.36 | 7.34 | 6.01 | 5.42 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | No | No | No | Yes | No |
| 50th-Percentile Queue Length [veh/ln] | 0.12 | 0.15 | 0.03 | 0.05 | 0.11 | 0.01 | 0.03 | 0.08 | 0.01 | 0.07 | 0.18 | 0.03 |
| 50th-Percentile Queue Length [ft/ln] | 3.03 | 3.72 | 0.69 | 1.24 | 2.75 | 0.16 | 0.73 | 2.04 | 0.31 | 1.83 | 4.51 | 0.66 |
| 95th-Percentile Queue Length [veh/ln] | 0.22 | 0.27 | 0.05 | 0.09 | 0.20 | 0.01 | 0.05 | 0.15 | 0.02 | 0.13 | 0.32 | 0.05 |
| 95th-Percentile Queue Length [ft/ln] | 5.46 | 6.70 | 1.24 | 2.23 | 4.95 | 0.28 | 1.32 | 3.67 | 0.56 | 3.30 | 8.12 | 1.18 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 7.72 | 5.90 | 5.45 | 7.70 | 5.75 | 5.35 | 7.81 | 5.62 | 5.36 | 7.34 | 6.01 | 5.42 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 6.38 | | | 6.11 | | | 5.90 | | | 6.19 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 6.19 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.156 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|------|-------|--------|-------|-------|-------|-------|
| Vehicle Miles Traveled [mph] | 6.83 | 13.98 | 2.73 | 2.87 | 11.15 | 0.66 | 21.98 | 112.82 | 17.58 | 5.04 | 19.09 | 3.00 |
| Stops [stops/h] | 18.47 | 22.66 | 4.21 | 7.53 | 16.75 | 0.95 | 4.47 | 12.41 | 1.90 | 11.16 | 27.48 | 4.01 |
| Fuel consumption [US gal/h] | 0.57 | 0.92 | 0.17 | 0.23 | 0.71 | 0.04 | 0.83 | 4.11 | 0.64 | 0.37 | 1.19 | 0.18 |
| CO [g/h] | 39.57 | 64.35 | 12.22 | 16.27 | 49.52 | 2.87 | 58.21 | 287.26 | 44.70 | 26.17 | 83.21 | 12.60 |
| NOx [g/h] | 7.70 | 12.52 | 2.38 | 3.17 | 9.63 | 0.56 | 11.33 | 55.89 | 8.70 | 5.09 | 16.19 | 2.45 |
| VOC [g/h] | 9.17 | 14.91 | 2.83 | 3.77 | 11.48 | 0.67 | 13.49 | 66.58 | 10.36 | 6.06 | 19.28 | 2.92 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3384 | | | 3384 | | | 3384 | | | 3384 | | |
| d_b, Bicycle Delay [s] | 5.66 | | | 5.66 | | | 5.66 | | | 5.66 | | |
| I_b,int, Bicycle LOS Score for Intersection | 1.959 | | | 1.789 | | | 1.753 | | | 1.964 | | |
| Bicycle LOS | A | | | A | | | A | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Haven School TIS

Vistro File: C:\...\AM 9-12-24.vistro

Scenario 6 2026 Total AM w/o Improvements

Report File: C:\...\2026 Total AM - w-o Improvements at
Milam.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|-------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.575 | 19.9 | C |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
 Analysis Method: HCM 7th Edition
 Analysis Period: 15 minutes

Delay (sec / veh): 19.9
 Level Of Service: C
 Volume to Capacity (v/c): 0.575

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|-------------|--------|-------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↑ ↑ | | ↑ ↑ | | ↑ ↑ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 0 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0600 | 1.0600 | 1.1200 | 1.1200 | 1.1700 | 1.1700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 28 | 5 | 0 | 16 | 3 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 71 | 115 | 40 | 139 | 237 | 35 |
| Peak Hour Factor | 0.7800 | 0.7800 | 0.7900 | 0.7900 | 0.6800 | 0.6800 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 23 | 37 | 13 | 44 | 87 | 13 |
| Total Analysis Volume [veh/h] | 91 | 147 | 51 | 176 | 349 | 51 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | No |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|--------|--------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.03 | 0.00 | 0.57 | 0.05 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.45 | 0.00 | 19.94 | 17.74 |
| Movement LOS | A | A | A | A | C | C |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.09 | 0.09 | 4.40 | 4.40 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 2.19 | 2.19 | 109.94 | 109.94 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.67 | | 19.66 | |
| Approach LOS | A | | A | | C | |
| d_I, Intersection Delay [s/veh] | 9.53 | | | | | |
| Intersection LOS | C | | | | | |

Haven School TIS

Vistro File: C:\...\PM 9-12-24.vistro

Scenario 2 2026 Back PM

Report File: C:\...\2026 Back PM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.266 | 13.4 | B |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | SB Left | 0.172 | 6.1 | A |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
Analysis Method: HCM 7th Edition
Analysis Period: 15 minutes

Delay (sec / veh): 13.4
Level Of Service: B
Volume to Capacity (v/c): 0.266

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↑↑ | | ↑ | | ↑ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 0 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0600 | 1.0600 | 1.1200 | 1.1200 | 1.1700 | 1.1700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 138 | 155 | 25 | 133 | 123 | 27 |
| Peak Hour Factor | 0.8800 | 0.8800 | 0.8200 | 0.8200 | 0.7600 | 0.7600 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 39 | 44 | 8 | 41 | 40 | 9 |
| Total Analysis Volume [veh/h] | 157 | 176 | 30 | 162 | 162 | 36 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |



Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | No |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|-------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.02 | 0.00 | 0.27 | 0.04 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.56 | 0.00 | 13.37 | 11.50 |
| Movement LOS | A | A | A | A | B | B |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.05 | 0.05 | 1.30 | 1.30 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 1.27 | 1.27 | 32.44 | 32.44 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.18 | | 13.03 | |
| Approach LOS | A | | A | | B | |
| d_I, Intersection Delay [s/veh] | 3.88 | | | | | |
| Intersection LOS | B | | | | | |

Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 6.1 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.172 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| | | | | | | | | | | | | |
| Base Volume Input [veh/h] | 20 | 106 | 25 | 28 | 105 | 14 | 16 | 137 | 27 | 23 | 77 | 25 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 1.1700 | 1.1700 | 1.1700 | 1.0900 | 1.0900 | 1.0900 | 1.1700 | 1.1700 | 1.1700 | 1.0600 | 1.0600 | 1.0600 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 15 | 0 | 0 | 8 | 0 | 0 | 16 | 0 | 0 | 14 |
| Total Hourly Volume [veh/h] | 23 | 124 | 14 | 31 | 114 | 7 | 19 | 160 | 16 | 24 | 82 | 13 |
| Peak Hour Factor | 0.9000 | 0.9000 | 0.9000 | 0.8500 | 0.8500 | 0.8500 | 0.8700 | 0.8700 | 0.8700 | 0.6540 | 0.6540 | 0.6540 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 6 | 34 | 4 | 9 | 34 | 2 | 5 | 46 | 5 | 9 | 31 | 5 |
| Total Analysis Volume [veh/h] | 26 | 138 | 16 | 36 | 134 | 8 | 22 | 184 | 18 | 37 | 125 | 20 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 7 | 7 | 7 | 7 | 7 | 7 | 8 | 8 | 8 | 8 | 8 | 8 |
| g / C, Green / Cycle | 0.31 | 0.31 | 0.31 | 0.31 | 0.31 | 0.31 | 0.34 | 0.34 | 0.34 | 0.34 | 0.34 | 0.34 |
| (v / s)_i Volume / Saturation Flow Rate | 0.02 | 0.07 | 0.01 | 0.03 | 0.07 | 0.01 | 0.02 | 0.10 | 0.01 | 0.03 | 0.07 | 0.01 |
| s, saturation flow rate [veh/h] | 1246 | 1870 | 1589 | 1233 | 1870 | 1589 | 1243 | 1870 | 1589 | 1180 | 1870 | 1589 |
| c, Capacity [veh/h] | 538 | 575 | 489 | 534 | 575 | 489 | 586 | 638 | 542 | 542 | 638 | 542 |
| d1, Uniform Delay [s] | 7.85 | 5.89 | 5.51 | 7.95 | 5.88 | 5.48 | 7.10 | 5.48 | 5.00 | 7.68 | 5.29 | 5.00 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.04 | 0.21 | 0.03 | 0.05 | 0.21 | 0.01 | 0.03 | 0.25 | 0.02 | 0.05 | 0.15 | 0.03 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| X, volume / capacity | 0.05 | 0.24 | 0.03 | 0.07 | 0.23 | 0.02 | 0.04 | 0.29 | 0.03 | 0.07 | 0.20 | 0.04 |
| d, Delay for Lane Group [s/veh] | 7.89 | 6.11 | 5.54 | 8.01 | 6.08 | 5.50 | 7.13 | 5.73 | 5.02 | 7.73 | 5.44 | 5.03 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.05 | 0.15 | 0.02 | 0.07 | 0.15 | 0.01 | 0.03 | 0.16 | 0.01 | 0.07 | 0.10 | 0.02 |
| 50th-Percentile Queue Length [ft/ln] | 1.20 | 3.78 | 0.41 | 1.69 | 3.66 | 0.20 | 0.86 | 4.01 | 0.35 | 1.65 | 2.57 | 0.39 |
| 95th-Percentile Queue Length [veh/ln] | 0.09 | 0.27 | 0.03 | 0.12 | 0.26 | 0.01 | 0.06 | 0.29 | 0.03 | 0.12 | 0.19 | 0.03 |
| 95th-Percentile Queue Length [ft/ln] | 2.16 | 6.81 | 0.74 | 3.05 | 6.58 | 0.37 | 1.56 | 7.22 | 0.64 | 2.96 | 4.63 | 0.71 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 7.89 | 6.11 | 5.54 | 8.01 | 6.08 | 5.50 | 7.13 | 5.73 | 5.02 | 7.73 | 5.44 | 5.03 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 6.31 | | | 6.45 | | | 5.81 | | | 5.86 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 6.09 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.172 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|-------|------|-------|-------|------|-------|--------|-------|-------|-------|------|
| Vehicle Miles Traveled [mph] | 2.73 | 14.50 | 1.68 | 3.97 | 14.79 | 0.88 | 32.23 | 269.60 | 26.37 | 4.44 | 15.01 | 2.40 |
| Stops [stops/h] | 7.67 | 24.14 | 2.61 | 10.81 | 23.35 | 1.30 | 5.52 | 25.61 | 2.25 | 10.51 | 16.42 | 2.51 |
| Fuel consumption [US gal/h] | 0.23 | 0.97 | 0.11 | 0.33 | 0.96 | 0.06 | 1.21 | 9.77 | 0.95 | 0.34 | 0.86 | 0.13 |
| CO [g/h] | 16.14 | 67.72 | 7.56 | 23.01 | 67.32 | 3.87 | 84.26 | 683.20 | 66.44 | 23.84 | 59.91 | 9.36 |
| NOx [g/h] | 3.14 | 13.17 | 1.47 | 4.48 | 13.10 | 0.75 | 16.39 | 132.93 | 12.93 | 4.64 | 11.66 | 1.82 |
| VOC [g/h] | 3.74 | 15.69 | 1.75 | 5.33 | 15.60 | 0.90 | 19.53 | 158.34 | 15.40 | 5.53 | 13.88 | 2.17 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3547 | | | 3547 | | | 3547 | | | 3547 | | |
| d_b, Bicycle Delay [s] | 6.75 | | | 6.75 | | | 6.75 | | | 6.75 | | |
| I_b,int, Bicycle LOS Score for Intersection | 1.881 | | | 1.867 | | | 1.956 | | | 1.883 | | |
| Bicycle LOS | A | | | A | | | A | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Haven School TIS

Vistro File: C:\...\PM 9-12-24.vistro

Scenario 6 2026 Total PM w/o Improvements

Report File: C:\...\2026 Total PM - w-o Improvements at
Milam.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|-------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.304 | 14.0 | B |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
 Analysis Method: HCM 7th Edition
 Analysis Period: 15 minutes

Delay (sec / veh): 14.0
 Level Of Service: B
 Volume to Capacity (v/c): 0.304

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|-------------|--------|-------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↑ ↓ | | ↑ ↓ | | ← → | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 0 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0600 | 1.0600 | 1.1200 | 1.1200 | 1.1700 | 1.1700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 13 | 2 | 0 | 16 | 3 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 138 | 168 | 27 | 133 | 139 | 30 |
| Peak Hour Factor | 0.8800 | 0.8800 | 0.8200 | 0.8200 | 0.7600 | 0.7600 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 39 | 48 | 8 | 41 | 46 | 10 |
| Total Analysis Volume [veh/h] | 157 | 191 | 33 | 162 | 183 | 39 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | No |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|-------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.02 | 0.00 | 0.30 | 0.04 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.57 | 0.00 | 13.95 | 12.03 |
| Movement LOS | A | A | A | A | B | B |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.06 | 0.06 | 1.55 | 1.55 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 1.40 | 1.40 | 38.83 | 38.83 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.28 | | 13.62 | |
| Approach LOS | A | | A | | B | |
| d_I, Intersection Delay [s/veh] | 4.28 | | | | | |
| Intersection LOS | B | | | | | |

Haven School TIS

Vistro File: C:\...\AM 9-12-24.vistro
 Report File: C:\...\2026 Total AM.pdf

Scenario 3 2026 Total AM
 9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|-----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.572 | 18.5 | C |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | EB Left | 0.160 | 6.3 | A |
| 3 | Burgess/School Access | Two-way stop | HCM 7th Edition | SB Left | 0.041 | 13.8 | B |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
Analysis Method: HCM 7th Edition
Analysis Period: 15 minutes

Delay (sec / veh): 18.5
Level Of Service: C
Volume to Capacity (v/c): 0.572

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↵↶ | | ↶↵ | | ↶↵ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 1 | 0 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 500.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 1 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 550.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0600 | 1.0600 | 1.1200 | 1.1200 | 1.1700 | 1.1700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 28 | 5 | 0 | 16 | 3 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 71 | 115 | 40 | 139 | 237 | 35 |
| Peak Hour Factor | 0.7800 | 0.7800 | 0.7900 | 0.7900 | 0.6800 | 0.6800 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 23 | 37 | 13 | 44 | 87 | 13 |
| Total Analysis Volume [veh/h] | 91 | 147 | 51 | 176 | 349 | 51 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.03 | 0.00 | 0.57 | 0.05 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.48 | 0.00 | 18.50 | 8.93 |
| Movement LOS | A | A | A | A | C | A |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.11 | 0.00 | 3.61 | 0.17 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 2.63 | 0.00 | 90.35 | 4.17 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.68 | | 17.28 | |
| Approach LOS | A | | A | | C | |
| d_I, Intersection Delay [s/veh] | 8.43 | | | | | |
| Intersection LOS | C | | | | | |

Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 6.3 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.160 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| | | | | | | | | | | | | |
| Base Volume Input [veh/h] | 37 | 75 | 30 | 20 | 78 | 10 | 13 | 64 | 21 | 29 | 109 | 35 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 1.1700 | 1.1700 | 1.1700 | 1.0900 | 1.0900 | 1.0900 | 1.1700 | 1.1700 | 1.1700 | 1.0600 | 1.0600 | 1.0600 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 9 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 6 | 0 | 5 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 18 | 0 | 0 | 6 | 0 | 0 | 16 | 0 | 0 | 19 |
| Total Hourly Volume [veh/h] | 52 | 88 | 17 | 22 | 85 | 5 | 15 | 78 | 15 | 31 | 121 | 18 |
| Peak Hour Factor | 0.6600 | 0.6600 | 0.6600 | 0.8400 | 0.8400 | 0.8400 | 0.9800 | 0.9800 | 0.9800 | 0.7300 | 0.7300 | 0.7300 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 20 | 33 | 6 | 7 | 25 | 1 | 4 | 20 | 4 | 11 | 41 | 6 |
| Total Analysis Volume [veh/h] | 79 | 133 | 26 | 26 | 101 | 6 | 15 | 80 | 15 | 42 | 166 | 25 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| g / C, Green / Cycle | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 |
| (v / s)_i Volume / Saturation Flow Rate | 0.06 | 0.07 | 0.02 | 0.02 | 0.05 | 0.00 | 0.01 | 0.04 | 0.01 | 0.03 | 0.09 | 0.02 |
| s, saturation flow rate [veh/h] | 1286 | 1870 | 1589 | 1227 | 1870 | 1589 | 1192 | 1870 | 1589 | 1301 | 1870 | 1589 |
| c, Capacity [veh/h] | 587 | 628 | 534 | 558 | 628 | 534 | 530 | 623 | 530 | 597 | 623 | 530 |
| d1, Uniform Delay [s] | 7.74 | 5.74 | 5.42 | 7.68 | 5.64 | 5.35 | 7.95 | 5.62 | 5.43 | 7.40 | 5.90 | 5.46 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.10 | 0.17 | 0.04 | 0.03 | 0.12 | 0.01 | 0.02 | 0.09 | 0.02 | 0.05 | 0.23 | 0.04 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| X, volume / capacity | 0.13 | 0.21 | 0.05 | 0.05 | 0.16 | 0.01 | 0.03 | 0.13 | 0.03 | 0.07 | 0.27 | 0.05 |
| d, Delay for Lane Group [s/veh] | 7.84 | 5.91 | 5.46 | 7.71 | 5.75 | 5.36 | 7.97 | 5.71 | 5.45 | 7.45 | 6.13 | 5.50 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | No | No | No | Yes | No |
| 50th-Percentile Queue Length [veh/ln] | 0.15 | 0.15 | 0.03 | 0.05 | 0.11 | 0.01 | 0.03 | 0.09 | 0.02 | 0.08 | 0.20 | 0.03 |
| 50th-Percentile Queue Length [ft/ln] | 3.83 | 3.86 | 0.72 | 1.27 | 2.85 | 0.16 | 0.77 | 2.26 | 0.42 | 1.92 | 5.05 | 0.70 |
| 95th-Percentile Queue Length [veh/ln] | 0.28 | 0.28 | 0.05 | 0.09 | 0.21 | 0.01 | 0.06 | 0.16 | 0.03 | 0.14 | 0.36 | 0.05 |
| 95th-Percentile Queue Length [ft/ln] | 6.89 | 6.94 | 1.29 | 2.28 | 5.13 | 0.29 | 1.39 | 4.08 | 0.75 | 3.46 | 9.09 | 1.26 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 7.84 | 5.91 | 5.46 | 7.71 | 5.75 | 5.36 | 7.97 | 5.71 | 5.45 | 7.45 | 6.13 | 5.50 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 6.50 | | | 6.12 | | | 5.98 | | | 6.30 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 6.28 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.160 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|------|-------|--------|-------|-------|-------|-------|
| Vehicle Miles Traveled [mph] | 8.30 | 13.98 | 2.73 | 2.87 | 11.15 | 0.66 | 21.98 | 117.22 | 21.98 | 5.04 | 19.93 | 3.00 |
| Stops [stops/h] | 22.95 | 23.10 | 4.29 | 7.59 | 17.08 | 0.97 | 4.63 | 13.57 | 2.50 | 11.52 | 30.26 | 4.20 |
| Fuel consumption [US gal/h] | 0.70 | 0.93 | 0.18 | 0.23 | 0.71 | 0.04 | 0.84 | 4.28 | 0.80 | 0.38 | 1.27 | 0.18 |
| CO [g/h] | 48.65 | 64.74 | 12.29 | 16.32 | 49.82 | 2.89 | 58.38 | 299.14 | 55.99 | 26.55 | 88.51 | 12.80 |
| NOx [g/h] | 9.47 | 12.60 | 2.39 | 3.18 | 9.69 | 0.56 | 11.36 | 58.20 | 10.89 | 5.17 | 17.22 | 2.49 |
| VOC [g/h] | 11.28 | 15.00 | 2.85 | 3.78 | 11.55 | 0.67 | 13.53 | 69.33 | 12.98 | 6.15 | 20.51 | 2.97 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3329 | | | 3329 | | | 3329 | | | 3329 | | |
| d_b, Bicycle Delay [s] | 5.30 | | | 5.30 | | | 5.30 | | | 5.30 | | |
| I_b,int, Bicycle LOS Score for Intersection | 1.982 | | | 1.789 | | | 1.768 | | | 1.975 | | |
| Bicycle LOS | A | | | A | | | A | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



**Intersection Level Of Service Report
Intersection 3: Burgess/School Access**

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Two-way stop | Delay (sec / veh): | 13.8 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | B |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.041 |

Intersection Setup

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|------------------------------|---------------------|--------|--------------|--------|--------------|--------|
| Approach | Southbound | | Eastbound | | Westbound | |
| Lane Configuration | | | | | | |
| Turning Movement | Left | Right | Left | Thru | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 0 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|---|---------------------|--------|--------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 0 | 0 | 0 | 113 | 216 | 0 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 1.1700 | 1.1700 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 9 | 19 | 33 | 0 | 0 | 14 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 9 | 19 | 33 | 132 | 253 | 14 |
| Peak Hour Factor | 0.5000 | 0.5000 | 0.5000 | 0.8500 | 0.8500 | 0.5000 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 5 | 10 | 17 | 39 | 74 | 7 |
| Total Analysis Volume [veh/h] | 18 | 38 | 66 | 155 | 298 | 28 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Stop | Free | Free |
| Flared Lane | No | | |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | No | | |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|-------|-------|------|------|------|------|
| V/C, Movement V/C Ratio | 0.04 | 0.05 | 0.05 | 0.00 | 0.00 | 0.00 |
| d_M, Delay for Movement [s/veh] | 13.80 | 10.56 | 8.08 | 0.00 | 0.00 | 0.00 |
| Movement LOS | B | B | A | A | A | A |
| 95th-Percentile Queue Length [veh/ln] | 0.31 | 0.31 | 0.17 | 0.00 | 0.00 | 0.00 |
| 95th-Percentile Queue Length [ft/ln] | 7.67 | 7.67 | 4.23 | 0.00 | 0.00 | 0.00 |
| d_A, Approach Delay [s/veh] | 11.60 | | 2.41 | | 0.00 | |
| Approach LOS | B | | A | | A | |
| d_I, Intersection Delay [s/veh] | 1.96 | | | | | |
| Intersection LOS | B | | | | | |

Haven School TIS

Vistro File: C:\...\PM 9-12-24.vistro
 Report File: C:\...\2026 Total PM.pdf

Scenario 3 2026 Total PM
 9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|-----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Two-way stop | HCM 7th Edition | WB Left | 0.303 | 13.5 | B |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | SB Left | 0.174 | 6.1 | A |
| 3 | Burgess/School Access | Two-way stop | HCM 7th Edition | SB Left | 0.036 | 12.7 | B |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

Control Type: Two-way stop
 Analysis Method: HCM 7th Edition
 Analysis Period: 15 minutes

Delay (sec / veh): 13.5
 Level Of Service: B
 Volume to Capacity (v/c): 0.303

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↵↗ | | ↖↵ | | ↖↗ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 1 | 0 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 500.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 1 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 500.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0600 | 1.0600 | 1.1200 | 1.1200 | 1.1700 | 1.1700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 13 | 2 | 0 | 16 | 3 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 138 | 168 | 27 | 133 | 139 | 30 |
| Peak Hour Factor | 0.8800 | 0.8800 | 0.8200 | 0.8200 | 0.7600 | 0.7600 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 39 | 48 | 8 | 41 | 46 | 10 |
| Total Analysis Volume [veh/h] | 157 | 191 | 33 | 162 | 183 | 39 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |



Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Free | Free | Stop |
| Flared Lane | | | |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | | | No |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|------|------|------|------|-------|------|
| V/C, Movement V/C Ratio | 0.00 | 0.00 | 0.02 | 0.00 | 0.30 | 0.04 |
| d_M, Delay for Movement [s/veh] | 0.00 | 0.00 | 7.59 | 0.00 | 13.54 | 9.24 |
| Movement LOS | A | A | A | A | B | A |
| 95th-Percentile Queue Length [veh/ln] | 0.00 | 0.00 | 0.07 | 0.00 | 1.27 | 0.14 |
| 95th-Percentile Queue Length [ft/ln] | 0.00 | 0.00 | 1.78 | 0.00 | 31.86 | 3.44 |
| d_A, Approach Delay [s/veh] | 0.00 | | 1.28 | | 12.78 | |
| Approach LOS | A | | A | | B | |
| d_I, Intersection Delay [s/veh] | 4.04 | | | | | |
| Intersection LOS | B | | | | | |

Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 6.1 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.174 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | | | | | | | | | | | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| | | | | | | | | | | | | |
| Base Volume Input [veh/h] | 20 | 106 | 25 | 28 | 105 | 14 | 16 | 137 | 27 | 23 | 77 | 25 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 1.1700 | 1.1700 | 1.1700 | 1.0900 | 1.0900 | 1.0900 | 1.1700 | 1.1700 | 1.1700 | 1.0600 | 1.0600 | 1.0600 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 6 | 0 | 2 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 15 | 0 | 0 | 8 | 0 | 0 | 19 | 0 | 0 | 14 |
| Total Hourly Volume [veh/h] | 27 | 124 | 14 | 31 | 114 | 7 | 19 | 163 | 19 | 24 | 84 | 13 |
| Peak Hour Factor | 0.9000 | 0.9000 | 0.9000 | 0.8500 | 0.8500 | 0.8500 | 0.8700 | 0.8700 | 0.8700 | 0.6540 | 0.6540 | 0.6540 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 8 | 34 | 4 | 9 | 34 | 2 | 5 | 47 | 5 | 9 | 32 | 5 |
| Total Analysis Volume [veh/h] | 30 | 138 | 16 | 36 | 134 | 8 | 22 | 187 | 22 | 37 | 128 | 20 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 7 | 7 | 7 | 7 | 7 | 7 | 8 | 8 | 8 | 8 | 8 | 8 |
| g / C, Green / Cycle | 0.31 | 0.31 | 0.31 | 0.31 | 0.31 | 0.31 | 0.34 | 0.34 | 0.34 | 0.34 | 0.34 | 0.34 |
| (v / s)_i Volume / Saturation Flow Rate | 0.02 | 0.07 | 0.01 | 0.03 | 0.07 | 0.01 | 0.02 | 0.10 | 0.01 | 0.03 | 0.07 | 0.01 |
| s, saturation flow rate [veh/h] | 1246 | 1870 | 1589 | 1233 | 1870 | 1589 | 1239 | 1870 | 1589 | 1173 | 1870 | 1589 |
| c, Capacity [veh/h] | 538 | 578 | 491 | 533 | 578 | 491 | 584 | 642 | 545 | 539 | 642 | 545 |
| d1, Uniform Delay [s] | 7.92 | 5.93 | 5.55 | 7.99 | 5.91 | 5.52 | 7.15 | 5.51 | 5.03 | 7.73 | 5.32 | 5.02 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.04 | 0.21 | 0.03 | 0.05 | 0.20 | 0.01 | 0.03 | 0.25 | 0.03 | 0.05 | 0.15 | 0.03 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| X, volume / capacity | 0.06 | 0.24 | 0.03 | 0.07 | 0.23 | 0.02 | 0.04 | 0.29 | 0.04 | 0.07 | 0.20 | 0.04 |
| d, Delay for Lane Group [s/veh] | 7.96 | 6.14 | 5.57 | 8.05 | 6.12 | 5.53 | 7.17 | 5.76 | 5.06 | 7.78 | 5.48 | 5.05 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.06 | 0.16 | 0.02 | 0.07 | 0.15 | 0.01 | 0.04 | 0.17 | 0.02 | 0.07 | 0.11 | 0.02 |
| 50th-Percentile Queue Length [ft/ln] | 1.43 | 3.92 | 0.42 | 1.73 | 3.79 | 0.21 | 0.89 | 4.25 | 0.45 | 1.69 | 2.75 | 0.41 |
| 95th-Percentile Queue Length [veh/ln] | 0.10 | 0.28 | 0.03 | 0.12 | 0.27 | 0.02 | 0.06 | 0.31 | 0.03 | 0.12 | 0.20 | 0.03 |
| 95th-Percentile Queue Length [ft/ln] | 2.57 | 7.05 | 0.76 | 3.12 | 6.82 | 0.38 | 1.60 | 7.64 | 0.81 | 3.04 | 4.94 | 0.74 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 7.96 | 6.14 | 5.57 | 8.05 | 6.12 | 5.53 | 7.17 | 5.76 | 5.06 | 7.78 | 5.48 | 5.05 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 6.39 | | | 6.48 | | | 5.83 | | | 5.89 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 6.12 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.174 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|-------|------|-------|-------|------|-------|--------|-------|-------|-------|------|
| Vehicle Miles Traveled [mph] | 3.15 | 14.50 | 1.68 | 3.97 | 14.79 | 0.88 | 32.23 | 273.99 | 32.23 | 4.44 | 15.37 | 2.40 |
| Stops [stops/h] | 9.00 | 24.73 | 2.68 | 10.94 | 23.92 | 1.33 | 5.62 | 26.81 | 2.84 | 10.68 | 17.34 | 2.58 |
| Fuel consumption [US gal/h] | 0.27 | 0.98 | 0.11 | 0.33 | 0.97 | 0.06 | 1.21 | 9.94 | 1.16 | 0.34 | 0.88 | 0.13 |
| CO [g/h] | 18.77 | 68.30 | 7.62 | 23.15 | 67.88 | 3.90 | 84.36 | 695.11 | 81.29 | 24.02 | 61.86 | 9.43 |
| NOx [g/h] | 3.65 | 13.29 | 1.48 | 4.50 | 13.21 | 0.76 | 16.41 | 135.24 | 15.82 | 4.67 | 12.04 | 1.83 |
| VOC [g/h] | 4.35 | 15.83 | 1.77 | 5.36 | 15.73 | 0.90 | 19.55 | 161.10 | 18.84 | 5.57 | 14.34 | 2.19 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3507 | | | 3507 | | | 3507 | | | 3507 | | |
| d_b, Bicycle Delay [s] | 6.48 | | | 6.48 | | | 6.48 | | | 6.48 | | |
| I_b,int, Bicycle LOS Score for Intersection | 1.888 | | | 1.867 | | | 1.972 | | | 1.888 | | |
| Bicycle LOS | A | | | A | | | A | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



**Intersection Level Of Service Report
Intersection 3: Burgess/School Access**

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Two-way stop | Delay (sec / veh): | 12.7 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | B |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.036 |

Intersection Setup

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|------------------------------|---------------------|--------|--------------|--------|--------------|--------|
| Approach | Southbound | | Eastbound | | Westbound | |
| Lane Configuration | | | | | | |
| Turning Movement | Left | Right | Left | Thru | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 0 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|---|---------------------|--------|--------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 0 | 0 | 0 | 113 | 216 | 0 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 1.1700 | 1.1700 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 9 | 19 | 15 | 0 | 0 | 6 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 9 | 19 | 15 | 132 | 253 | 6 |
| Peak Hour Factor | 0.5000 | 0.5000 | 0.5000 | 0.8500 | 0.8500 | 0.5000 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 5 | 10 | 8 | 39 | 74 | 3 |
| Total Analysis Volume [veh/h] | 18 | 38 | 30 | 155 | 298 | 12 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Stop | Free | Free |
| Flared Lane | No | | |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | No | | |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|-------|-------|------|------|------|------|
| V/C, Movement V/C Ratio | 0.04 | 0.05 | 0.02 | 0.00 | 0.00 | 0.00 |
| d_M, Delay for Movement [s/veh] | 12.67 | 10.43 | 7.95 | 0.00 | 0.00 | 0.00 |
| Movement LOS | B | B | A | A | A | A |
| 95th-Percentile Queue Length [veh/ln] | 0.29 | 0.29 | 0.07 | 0.00 | 0.00 | 0.00 |
| 95th-Percentile Queue Length [ft/ln] | 7.15 | 7.15 | 1.84 | 0.00 | 0.00 | 0.00 |
| d_A, Approach Delay [s/veh] | 11.15 | | 1.29 | | 0.00 | |
| Approach LOS | B | | A | | A | |
| d_I, Intersection Delay [s/veh] | 1.57 | | | | | |
| Intersection LOS | B | | | | | |

Year 2045 Traffic Volume Scenarios

Haven School TIS

Vistro File: C:\...\AM 9-12-24.vistro

Scenario 4 2045 Back AM

Report File: C:\...\2045 Back AM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Signalized | HCM 7th Edition | SB Left | 0.088 | 2.3 | A |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | WB Left | 0.246 | 7.0 | A |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level Of Service Report
Intersection 1: Milam/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 2.3 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.088 |

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↔ | | ↔ | | ↔↔ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Curb Present | No | | No | | No | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| | | | | | | |
| Base Volume Input [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | |
| Growth Factor | 1.5700 | 1.5700 | 2.2300 | 2.2300 | 3.1100 | 3.1100 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 105 | 129 | 69 | 277 | 588 | 84 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 29 | 35 | 19 | 75 | 160 | 23 |
| Total Analysis Volume [veh/h] | 114 | 140 | 75 | 301 | 639 | 91 |
| Presence of On-Street Parking | No | No | No | No | No | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | 0 | | 0 | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | 0 | | 0 | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |
| Bicycle Volume [bicycles/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permissive | Permissive | Permissive | Permissive | Permissive | Permissive |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Signal Group | 2 | 0 | 0 | 6 | 0 | 0 |
| Auxiliary Signal Groups | | | | | | |
| Maximum Green [s] | 40 | 0 | 0 | 40 | 0 | 0 |
| Amber [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| All red [s] | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 |
| Walk [s] | 5 | 0 | 0 | 5 | 0 | 0 |
| Pedestrian Clearance [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | No | | | No | | |
| I1, Start-Up Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| I2, Clearance Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|
| Split [s] | 14 | 0 | 0 | 14 | 0 | 0 |
| Lead / Lag | - | - | - | - | - | - |
| Minimum Green [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Vehicle Extension [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| Minimum Recall | No | | | No | | |
| Maximum Recall | No | | | No | | |
| Pedestrian Recall | No | | | No | | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | C | R | L | C | |
|---|------|------|------|------|--|
| C, Calculated Cycle Length [s] | 16 | 16 | 16 | 16 | |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | |
| l1_p, Permitted Start-Up Lost Time [s] | 0.00 | 0.00 | 2.00 | 0.00 | |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | |
| g_i, Effective Green Time [s] | 8 | 8 | 8 | 8 | |
| g / C, Green / Cycle | 0.51 | 0.51 | 0.51 | 0.51 | |
| (v / s)_i Volume / Saturation Flow Rate | 0.03 | 0.09 | 0.07 | 0.08 | |
| s, saturation flow rate [veh/h] | 3560 | 1589 | 1125 | 3560 | |
| c, Capacity [veh/h] | 1814 | 810 | 874 | 1814 | |
| d1, Uniform Delay [s] | 2.04 | 2.16 | 3.30 | 2.15 | |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | |
| d2, Incremental Delay [s] | 0.01 | 0.10 | 0.04 | 0.04 | |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | |

Lane Group Results

| | | | | | |
|---------------------------------------|------|------|------|------|--|
| X, volume / capacity | 0.06 | 0.17 | 0.09 | 0.17 | |
| d, Delay for Lane Group [s/veh] | 2.05 | 2.26 | 3.35 | 2.20 | |
| Lane Group LOS | A | A | A | A | |
| Critical Lane Group | No | Yes | No | No | |
| 50th-Percentile Queue Length [veh/ln] | 0.00 | 0.02 | 0.06 | 0.01 | |
| 50th-Percentile Queue Length [ft/ln] | 0.09 | 0.56 | 1.38 | 0.27 | |
| 95th-Percentile Queue Length [veh/ln] | 0.01 | 0.04 | 0.10 | 0.02 | |
| 95th-Percentile Queue Length [ft/ln] | 0.16 | 1.02 | 2.48 | 0.48 | |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------|-------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 2.05 | 2.26 | 3.35 | 2.20 | 0.00 | 0.00 |
| Movement LOS | A | A | A | A | | |
| d_A, Approach Delay [s/veh] | 2.17 | | 2.43 | | 0.00 | |
| Approach LOS | A | | A | | A | |
| d_I, Intersection Delay [s/veh] | 2.32 | | | | | |
| Intersection LOS | A | | | | | |
| Intersection V/C | 0.088 | | | | | |

Emissions

| | | | | | |
|------------------------------|-------|-------|-------|-------|--|
| Vehicle Miles Traveled [mph] | 5.85 | 7.18 | 4.31 | 17.28 | |
| Stops [stops/h] | 1.60 | 4.99 | 12.18 | 4.75 | |
| Fuel consumption [US gal/h] | 0.27 | 0.37 | 0.35 | 0.79 | |
| CO [g/h] | 18.73 | 26.05 | 24.47 | 54.94 | |
| NOx [g/h] | 3.64 | 5.07 | 4.76 | 10.69 | |
| VOC [g/h] | 4.34 | 6.04 | 5.67 | 12.73 | |

Other Modes

| | | | | | | |
|--|-------|--|-------|--|-------|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | 0.0 | | 0.0 | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| d_p, Pedestrian Delay [s] | 0.00 | | 0.00 | | 0.00 | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | 0.000 | | 0.000 | |
| Crosswalk LOS | F | | F | | F | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | 2000 | | 2000 | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 4911 | | 4911 | | 0 | |
| d_b, Bicycle Delay [s] | 17.25 | | 17.25 | | 8.15 | |
| I_b,int, Bicycle LOS Score for Intersection | 1.769 | | 1.870 | | 1.560 | |
| Bicycle LOS | A | | A | | A | |

Sequence

| | | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 7.0 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.246 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | | ↵↵↵ | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Base Volume Input [veh/h] | 37 | 75 | 30 | 20 | 78 | 10 | 13 | 64 | 21 | 29 | 109 | 35 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 3.1500 | 3.1500 | 3.1500 | 1.9100 | 1.9100 | 1.9100 | 3.1100 | 3.1100 | 3.1100 | 1.5700 | 1.5700 | 1.5700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 48 | 0 | 0 | 10 | 0 | 0 | 33 | 0 | 0 | 28 |
| Total Hourly Volume [veh/h] | 117 | 236 | 47 | 38 | 149 | 9 | 40 | 199 | 32 | 46 | 171 | 27 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9800 | 0.9800 | 0.9800 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 32 | 64 | 13 | 10 | 40 | 2 | 10 | 51 | 8 | 13 | 46 | 7 |
| Total Analysis Volume [veh/h] | 127 | 257 | 51 | 41 | 162 | 10 | 41 | 203 | 33 | 50 | 186 | 29 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 26 | 26 | 26 | 26 | 26 | 26 | 26 | 26 | 26 | 26 | 26 | 26 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 10 | 10 | 10 | 10 | 10 | 10 | 9 | 9 | 9 | 9 | 9 | 9 |
| g / C, Green / Cycle | 0.37 | 0.37 | 0.37 | 0.37 | 0.37 | 0.37 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 |
| (v / s)_i Volume / Saturation Flow Rate | 0.10 | 0.14 | 0.03 | 0.04 | 0.09 | 0.01 | 0.04 | 0.11 | 0.02 | 0.04 | 0.10 | 0.02 |
| s, saturation flow rate [veh/h] | 1213 | 1870 | 1589 | 1071 | 1870 | 1589 | 1166 | 1870 | 1589 | 1144 | 1870 | 1589 |
| c, Capacity [veh/h] | 562 | 683 | 581 | 482 | 683 | 581 | 500 | 624 | 531 | 487 | 624 | 531 |
| d1, Uniform Delay [s] | 8.58 | 6.21 | 5.53 | 8.90 | 5.86 | 5.39 | 8.89 | 6.62 | 6.03 | 9.14 | 6.55 | 6.01 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.20 | 0.34 | 0.06 | 0.07 | 0.18 | 0.01 | 0.07 | 0.30 | 0.05 | 0.09 | 0.26 | 0.04 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|-------|-------|------|------|-------|------|------|-------|------|------|-------|------|
| X, volume / capacity | 0.23 | 0.38 | 0.09 | 0.09 | 0.24 | 0.02 | 0.08 | 0.33 | 0.06 | 0.10 | 0.30 | 0.05 |
| d, Delay for Lane Group [s/veh] | 8.78 | 6.55 | 5.60 | 8.98 | 6.04 | 5.40 | 8.96 | 6.92 | 6.07 | 9.23 | 6.82 | 6.05 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.32 | 0.39 | 0.07 | 0.11 | 0.23 | 0.01 | 0.11 | 0.36 | 0.05 | 0.14 | 0.32 | 0.05 |
| 50th-Percentile Queue Length [ft/ln] | 7.98 | 9.81 | 1.71 | 2.74 | 5.71 | 0.32 | 2.74 | 8.93 | 1.31 | 3.46 | 8.06 | 1.15 |
| 95th-Percentile Queue Length [veh/ln] | 0.57 | 0.71 | 0.12 | 0.20 | 0.41 | 0.02 | 0.20 | 0.64 | 0.09 | 0.25 | 0.58 | 0.08 |
| 95th-Percentile Queue Length [ft/ln] | 14.36 | 17.67 | 3.07 | 4.94 | 10.28 | 0.58 | 4.93 | 16.07 | 2.35 | 6.22 | 14.51 | 2.06 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 8.78 | 6.55 | 5.60 | 8.98 | 6.04 | 5.40 | 8.96 | 6.92 | 6.07 | 9.23 | 6.82 | 6.05 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 7.09 | | | 6.58 | | | 7.12 | | | 7.19 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 7.03 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.246 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|--------|-------|-------|-------|------|--------|--------|--------|-------|--------|-------|
| Vehicle Miles Traveled [mph] | 13.35 | 27.01 | 5.36 | 4.52 | 17.88 | 1.10 | 60.07 | 297.44 | 48.35 | 6.00 | 22.33 | 3.48 |
| Stops [stops/h] | 43.42 | 53.44 | 9.30 | 14.94 | 31.11 | 1.76 | 14.91 | 48.60 | 7.12 | 18.82 | 43.89 | 6.24 |
| Fuel consumption [US gal/h] | 1.22 | 1.93 | 0.36 | 0.42 | 1.20 | 0.07 | 2.32 | 11.09 | 1.79 | 0.53 | 1.57 | 0.23 |
| CO [g/h] | 85.59 | 135.12 | 24.99 | 29.06 | 83.79 | 4.95 | 162.12 | 774.88 | 124.89 | 37.30 | 109.69 | 16.26 |
| NOx [g/h] | 16.65 | 26.29 | 4.86 | 5.65 | 16.30 | 0.96 | 31.54 | 150.76 | 24.30 | 7.26 | 21.34 | 3.16 |
| VOC [g/h] | 19.84 | 31.31 | 5.79 | 6.74 | 19.42 | 1.15 | 37.57 | 179.59 | 28.94 | 8.65 | 25.42 | 3.77 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3025 | | | 3025 | | | 3025 | | | 3025 | | |
| d_b, Bicycle Delay [s] | 3.47 | | | 3.47 | | | 3.47 | | | 3.47 | | |
| I_b,int, Bicycle LOS Score for Intersection | 2.357 | | | 1.928 | | | 2.071 | | | 2.043 | | |
| Bicycle LOS | B | | | A | | | B | | | B | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Haven School TIS

Vistro File: C:\...\PM 9-12-24.vistro

Scenario 4 2045 Back PM

Report File: C:\...\2045 Back PM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Signalized | HCM 7th Edition | SB Left | 0.157 | 2.3 | A |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | WB Left | 0.442 | 8.1 | A |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level of Service Report
Intersection 1: Milam/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 2.3 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.157 |

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↔ | | ↔ | | ↔↔ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Curb Present | No | | No | | No | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | |
| Growth Factor | 1.5700 | 1.5700 | 2.2300 | 2.2300 | 3.1100 | 3.1100 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 204 | 229 | 49 | 265 | 327 | 72 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 55 | 62 | 13 | 72 | 89 | 20 |
| Total Analysis Volume [veh/h] | 222 | 249 | 53 | 288 | 355 | 78 |
| Presence of On-Street Parking | No | No | No | No | No | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | 0 | | 0 | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | 0 | | 0 | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |
| Bicycle Volume [bicycles/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permissive | Permissive | Permissive | Permissive | Permissive | Permissive |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Signal Group | 2 | 0 | 0 | 6 | 0 | 0 |
| Auxiliary Signal Groups | | | | | | |
| Maximum Green [s] | 40 | 0 | 0 | 40 | 0 | 0 |
| Amber [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| All red [s] | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 |
| Walk [s] | 5 | 0 | 0 | 5 | 0 | 0 |
| Pedestrian Clearance [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | No | | | No | | |
| I1, Start-Up Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| I2, Clearance Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|
| Split [s] | 14 | 0 | 0 | 14 | 0 | 0 |
| Lead / Lag | - | - | - | - | - | - |
| Minimum Green [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Vehicle Extension [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| Minimum Recall | No | | | No | | |
| Maximum Recall | No | | | No | | |
| Pedestrian Recall | No | | | No | | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | C | R | L | C | |
|---|------|------|------|------|--|
| C, Calculated Cycle Length [s] | 17 | 17 | 17 | 17 | |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | |
| l1_p, Permitted Start-Up Lost Time [s] | 0.00 | 0.00 | 2.00 | 0.00 | |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | |
| g_i, Effective Green Time [s] | 9 | 9 | 9 | 9 | |
| g / C, Green / Cycle | 0.53 | 0.53 | 0.53 | 0.53 | |
| (v / s)_i Volume / Saturation Flow Rate | 0.06 | 0.16 | 0.06 | 0.08 | |
| s, saturation flow rate [veh/h] | 3560 | 1589 | 922 | 3560 | |
| c, Capacity [veh/h] | 1889 | 843 | 789 | 1889 | |
| d1, Uniform Delay [s] | 2.02 | 2.25 | 3.27 | 2.06 | |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | |
| d2, Incremental Delay [s] | 0.03 | 0.19 | 0.04 | 0.04 | |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | |

Lane Group Results

| | | | | | |
|---------------------------------------|------|------|------|------|--|
| X, volume / capacity | 0.12 | 0.30 | 0.07 | 0.15 | |
| d, Delay for Lane Group [s/veh] | 2.05 | 2.44 | 3.30 | 2.10 | |
| Lane Group LOS | A | A | A | A | |
| Critical Lane Group | No | Yes | No | No | |
| 50th-Percentile Queue Length [veh/ln] | 0.01 | 0.05 | 0.04 | 0.01 | |
| 50th-Percentile Queue Length [ft/ln] | 0.18 | 1.13 | 1.06 | 0.24 | |
| 95th-Percentile Queue Length [veh/ln] | 0.01 | 0.08 | 0.08 | 0.02 | |
| 95th-Percentile Queue Length [ft/ln] | 0.32 | 2.04 | 1.91 | 0.44 | |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------|-------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 2.05 | 2.44 | 3.30 | 2.10 | 0.00 | 0.00 |
| Movement LOS | A | A | A | A | | |
| d_A, Approach Delay [s/veh] | 2.26 | | 2.29 | | 0.00 | |
| Approach LOS | A | | A | | A | |
| d_I, Intersection Delay [s/veh] | 2.27 | | | | | |
| Intersection LOS | A | | | | | |
| Intersection V/C | 0.157 | | | | | |

Emissions

| | | | | | |
|------------------------------|-------|-------|-------|-------|--|
| Vehicle Miles Traveled [mph] | 11.39 | 12.77 | 3.04 | 16.54 | |
| Stops [stops/h] | 3.03 | 9.53 | 8.95 | 4.10 | |
| Fuel consumption [US gal/h] | 0.52 | 0.68 | 0.25 | 0.74 | |
| CO [g/h] | 36.40 | 47.54 | 17.56 | 51.78 | |
| NOx [g/h] | 7.08 | 9.25 | 3.42 | 10.07 | |
| VOC [g/h] | 8.43 | 11.02 | 4.07 | 12.00 | |

Other Modes

| | | | | | | |
|--|-------|--|-------|--|-------|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | 0.0 | | 0.0 | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| d_p, Pedestrian Delay [s] | 0.00 | | 0.00 | | 0.00 | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | 0.000 | | 0.000 | |
| Crosswalk LOS | F | | F | | F | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | 2000 | | 2000 | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 4684 | | 4684 | | 0 | |
| d_b, Bicycle Delay [s] | 15.38 | | 15.38 | | 8.54 | |
| I_b,int, Bicycle LOS Score for Intersection | 1.948 | | 1.841 | | 1.560 | |
| Bicycle LOS | A | | A | | A | |

Sequence

| | | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 8.1 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.442 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | | | | | | | | | | | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| | | | | | | | | | | | | |
| Base Volume Input [veh/h] | 20 | 106 | 25 | 28 | 105 | 14 | 16 | 137 | 27 | 23 | 77 | 25 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 3.1500 | 3.1500 | 3.1500 | 1.9100 | 1.9100 | 1.9100 | 3.1100 | 3.1100 | 3.1100 | 1.5700 | 1.5700 | 1.5700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 40 | 0 | 0 | 14 | 0 | 0 | 42 | 0 | 0 | 20 |
| Total Hourly Volume [veh/h] | 63 | 334 | 39 | 53 | 201 | 13 | 50 | 426 | 42 | 36 | 121 | 19 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 17 | 91 | 11 | 14 | 55 | 4 | 14 | 116 | 11 | 10 | 33 | 5 |
| Total Analysis Volume [veh/h] | 68 | 363 | 42 | 58 | 218 | 14 | 54 | 463 | 46 | 39 | 132 | 21 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|-------|------|------|------|------|------|-------|------|------|
| C, Calculated Cycle Length [s] | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| g / C, Green / Cycle | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.36 | 0.36 | 0.36 | 0.36 | 0.36 | 0.36 |
| (v / s)_i Volume / Saturation Flow Rate | 0.06 | 0.19 | 0.03 | 0.06 | 0.12 | 0.01 | 0.04 | 0.25 | 0.03 | 0.04 | 0.07 | 0.01 |
| s, saturation flow rate [veh/h] | 1148 | 1870 | 1589 | 980 | 1870 | 1589 | 1234 | 1870 | 1589 | 890 | 1870 | 1589 |
| c, Capacity [veh/h] | 489 | 660 | 561 | 383 | 660 | 561 | 572 | 674 | 573 | 337 | 674 | 573 |
| d1, Uniform Delay [s] | 9.46 | 7.25 | 6.00 | 11.29 | 6.61 | 5.89 | 8.10 | 7.58 | 5.87 | 12.13 | 6.14 | 5.78 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.13 | 0.72 | 0.06 | 0.18 | 0.29 | 0.02 | 0.07 | 1.26 | 0.06 | 0.15 | 0.14 | 0.03 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|------|-------|------|-------|-------|------|------|-------|------|-------|------|------|
| X, volume / capacity | 0.14 | 0.55 | 0.07 | 0.15 | 0.33 | 0.02 | 0.09 | 0.69 | 0.08 | 0.12 | 0.20 | 0.04 |
| d, Delay for Lane Group [s/veh] | 9.59 | 7.97 | 6.06 | 11.47 | 6.90 | 5.91 | 8.17 | 8.84 | 5.93 | 12.28 | 6.28 | 5.81 |
| Lane Group LOS | A | A | A | B | A | A | A | A | A | B | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.21 | 0.77 | 0.07 | 0.21 | 0.40 | 0.02 | 0.14 | 1.08 | 0.07 | 0.16 | 0.22 | 0.03 |
| 50th-Percentile Queue Length [ft/ln] | 5.13 | 19.33 | 1.75 | 5.37 | 10.12 | 0.57 | 3.38 | 27.05 | 1.87 | 3.91 | 5.54 | 0.83 |
| 95th-Percentile Queue Length [veh/ln] | 0.37 | 1.39 | 0.13 | 0.39 | 0.73 | 0.04 | 0.24 | 1.95 | 0.13 | 0.28 | 0.40 | 0.06 |
| 95th-Percentile Queue Length [ft/ln] | 9.23 | 34.79 | 3.16 | 9.67 | 18.21 | 1.03 | 6.08 | 48.68 | 3.36 | 7.04 | 9.98 | 1.50 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|-------|------|------|------|------|------|-------|------|------|
| d_M, Delay for Movement [s/veh] | 9.59 | 7.97 | 6.06 | 11.47 | 6.90 | 5.91 | 8.17 | 8.84 | 5.93 | 12.28 | 6.28 | 5.81 |
| Movement LOS | A | A | A | B | A | A | A | A | A | B | A | A |
| d_A, Approach Delay [s/veh] | 8.03 | | | 7.77 | | | 8.53 | | | 7.44 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 8.09 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.442 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|--------|-------|-------|--------|------|--------|---------|--------|-------|-------|-------|
| Vehicle Miles Traveled [mph] | 7.15 | 38.15 | 4.41 | 6.40 | 24.06 | 1.54 | 79.12 | 678.39 | 67.40 | 4.68 | 15.85 | 2.52 |
| Stops [stops/h] | 26.62 | 100.30 | 9.10 | 27.87 | 52.50 | 2.97 | 17.54 | 140.36 | 9.68 | 20.29 | 28.77 | 4.33 |
| Fuel consumption [US gal/h] | 0.71 | 3.14 | 0.32 | 0.70 | 1.78 | 0.11 | 3.02 | 25.83 | 2.49 | 0.51 | 1.07 | 0.17 |
| CO [g/h] | 49.54 | 219.74 | 22.11 | 49.02 | 124.68 | 7.46 | 211.10 | 1805.61 | 173.79 | 35.66 | 74.76 | 11.54 |
| NOx [g/h] | 9.64 | 42.75 | 4.30 | 9.54 | 24.26 | 1.45 | 41.07 | 351.31 | 33.81 | 6.94 | 14.55 | 2.25 |
| VOC [g/h] | 11.48 | 50.93 | 5.12 | 11.36 | 28.89 | 1.73 | 48.92 | 418.47 | 40.28 | 8.26 | 17.33 | 2.67 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 2883 | | | 2883 | | | 2883 | | | 2883 | | |
| d_b, Bicycle Delay [s] | 2.70 | | | 2.70 | | | 2.70 | | | 2.70 | | |
| I_b,int, Bicycle LOS Score for Intersection | 2.406 | | | 2.061 | | | 2.558 | | | 1.909 | | |
| Bicycle LOS | B | | | B | | | B | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Haven School TIS

Vistro File: C:\...\AM 9-12-24.vistro
 Report File: C:\...\2045 Total AM.pdf

Scenario 5 2045 Total AM
 9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|-----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Signalized | HCM 7th Edition | SB Left | 0.108 | 2.3 | A |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | WB Left | 0.248 | 7.1 | A |
| 3 | Burgess/School Access | Two-way stop | HCM 7th Edition | SB Left | 0.090 | 24.7 | C |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level of Service Report
Intersection 1: Milam/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 2.3 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.108 |

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↔ | | ↔ | | ↔↔ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Curb Present | No | | No | | No | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| | | | | | | |
| Base Volume Input [veh/h] | 67 | 82 | 31 | 124 | 189 | 27 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | |
| Growth Factor | 1.5700 | 1.5700 | 2.2300 | 2.2300 | 3.1100 | 3.1100 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 28 | 5 | 0 | 16 | 3 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 105 | 157 | 74 | 277 | 604 | 87 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 29 | 43 | 20 | 75 | 164 | 24 |
| Total Analysis Volume [veh/h] | 114 | 171 | 80 | 301 | 657 | 95 |
| Presence of On-Street Parking | No | No | No | No | No | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | 0 | | 0 | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | 0 | | 0 | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |
| Bicycle Volume [bicycles/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permissive | Permissive | Permissive | Permissive | Permissive | Permissive |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Signal Group | 2 | 0 | 0 | 6 | 0 | 0 |
| Auxiliary Signal Groups | | | | | | |
| Maximum Green [s] | 40 | 0 | 0 | 40 | 0 | 0 |
| Amber [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| All red [s] | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 |
| Walk [s] | 5 | 0 | 0 | 5 | 0 | 0 |
| Pedestrian Clearance [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | No | | | No | | |
| I1, Start-Up Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| I2, Clearance Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|
| Split [s] | 14 | 0 | 0 | 14 | 0 | 0 |
| Lead / Lag | - | - | - | - | - | - |
| Minimum Green [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Vehicle Extension [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| Minimum Recall | No | | | No | | |
| Maximum Recall | No | | | No | | |
| Pedestrian Recall | No | | | No | | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | C | R | L | C | |
|---|------|------|------|------|--|
| C, Calculated Cycle Length [s] | 16 | 16 | 16 | 16 | |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | |
| l1_p, Permitted Start-Up Lost Time [s] | 0.00 | 0.00 | 2.00 | 0.00 | |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | |
| g_i, Effective Green Time [s] | 8 | 8 | 8 | 8 | |
| g / C, Green / Cycle | 0.51 | 0.51 | 0.51 | 0.51 | |
| (v / s)_i Volume / Saturation Flow Rate | 0.03 | 0.11 | 0.07 | 0.08 | |
| s, saturation flow rate [veh/h] | 3560 | 1589 | 1094 | 3560 | |
| c, Capacity [veh/h] | 1819 | 812 | 863 | 1819 | |
| d1, Uniform Delay [s] | 2.03 | 2.20 | 3.32 | 2.15 | |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | |
| d2, Incremental Delay [s] | 0.01 | 0.13 | 0.05 | 0.04 | |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | |

Lane Group Results

| | | | | | |
|---------------------------------------|------|------|------|------|--|
| X, volume / capacity | 0.06 | 0.21 | 0.09 | 0.17 | |
| d, Delay for Lane Group [s/veh] | 2.05 | 2.33 | 3.36 | 2.19 | |
| Lane Group LOS | A | A | A | A | |
| Critical Lane Group | No | Yes | No | No | |
| 50th-Percentile Queue Length [veh/ln] | 0.00 | 0.03 | 0.06 | 0.01 | |
| 50th-Percentile Queue Length [ft/ln] | 0.09 | 0.72 | 1.48 | 0.27 | |
| 95th-Percentile Queue Length [veh/ln] | 0.01 | 0.05 | 0.11 | 0.02 | |
| 95th-Percentile Queue Length [ft/ln] | 0.16 | 1.30 | 2.67 | 0.48 | |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------|-------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 2.05 | 2.33 | 3.36 | 2.19 | 0.00 | 0.00 |
| Movement LOS | A | A | A | A | | |
| d_A, Approach Delay [s/veh] | 2.22 | | 2.44 | | 0.00 | |
| Approach LOS | A | | A | | A | |
| d_I, Intersection Delay [s/veh] | 2.34 | | | | | |
| Intersection LOS | A | | | | | |
| Intersection V/C | 0.108 | | | | | |

Emissions

| | | | | | |
|------------------------------|-------|-------|-------|-------|--|
| Vehicle Miles Traveled [mph] | 5.85 | 8.77 | 4.59 | 17.28 | |
| Stops [stops/h] | 1.59 | 6.35 | 13.08 | 4.72 | |
| Fuel consumption [US gal/h] | 0.27 | 0.46 | 0.37 | 0.79 | |
| CO [g/h] | 18.71 | 32.21 | 26.21 | 54.89 | |
| NOx [g/h] | 3.64 | 6.27 | 5.10 | 10.68 | |
| VOC [g/h] | 4.34 | 7.46 | 6.07 | 12.72 | |

Other Modes

| | | | | | | |
|--|-------|--|-------|--|-------|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | 0.0 | | 0.0 | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| d_p, Pedestrian Delay [s] | 0.00 | | 0.00 | | 0.00 | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | 0.000 | | 0.000 | |
| Crosswalk LOS | F | | F | | F | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | 2000 | | 2000 | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 4896 | | 4896 | | 0 | |
| d_b, Bicycle Delay [s] | 17.13 | | 17.13 | | 8.17 | |
| I_b,int, Bicycle LOS Score for Intersection | 1.795 | | 1.874 | | 1.560 | |
| Bicycle LOS | A | | A | | A | |

Sequence

| | | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 7.1 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.248 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | | | | | | | | | | | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Base Volume Input [veh/h] | 37 | 75 | 30 | 20 | 78 | 10 | 13 | 64 | 21 | 29 | 109 | 35 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 3.1500 | 3.1500 | 3.1500 | 1.9100 | 1.9100 | 1.9100 | 3.1100 | 3.1100 | 3.1100 | 1.5700 | 1.5700 | 1.5700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 9 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 6 | 0 | 5 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 48 | 0 | 0 | 10 | 0 | 0 | 36 | 0 | 0 | 28 |
| Total Hourly Volume [veh/h] | 126 | 236 | 47 | 38 | 149 | 9 | 40 | 202 | 35 | 46 | 176 | 27 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9800 | 0.9800 | 0.9800 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 34 | 64 | 13 | 10 | 40 | 2 | 10 | 52 | 9 | 13 | 48 | 7 |
| Total Analysis Volume [veh/h] | 137 | 257 | 51 | 41 | 162 | 10 | 41 | 206 | 36 | 50 | 191 | 29 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | Free Running |
| Actuation Type | Fully actuated |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|------|------|------|------|------|------|------|------|------|
| C, Calculated Cycle Length [s] | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 10 | 10 | 10 | 10 | 10 | 10 | 9 | 9 | 9 | 9 | 9 | 9 |
| g / C, Green / Cycle | 0.36 | 0.36 | 0.36 | 0.36 | 0.36 | 0.36 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 | 0.33 |
| (v / s)_i Volume / Saturation Flow Rate | 0.11 | 0.14 | 0.03 | 0.04 | 0.09 | 0.01 | 0.04 | 0.11 | 0.02 | 0.04 | 0.10 | 0.02 |
| s, saturation flow rate [veh/h] | 1213 | 1870 | 1589 | 1071 | 1870 | 1589 | 1161 | 1870 | 1589 | 1138 | 1870 | 1589 |
| c, Capacity [veh/h] | 561 | 683 | 581 | 482 | 683 | 581 | 497 | 626 | 532 | 485 | 626 | 532 |
| d1, Uniform Delay [s] | 8.69 | 6.23 | 5.55 | 8.93 | 5.89 | 5.41 | 8.94 | 6.63 | 6.04 | 9.17 | 6.57 | 6.01 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.22 | 0.34 | 0.06 | 0.08 | 0.18 | 0.01 | 0.07 | 0.30 | 0.05 | 0.09 | 0.27 | 0.04 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|-------|-------|------|------|-------|------|------|-------|------|------|-------|------|
| X, volume / capacity | 0.24 | 0.38 | 0.09 | 0.09 | 0.24 | 0.02 | 0.08 | 0.33 | 0.07 | 0.10 | 0.30 | 0.05 |
| d, Delay for Lane Group [s/veh] | 8.91 | 6.58 | 5.62 | 9.01 | 6.06 | 5.42 | 9.01 | 6.94 | 6.09 | 9.27 | 6.84 | 6.05 |
| Lane Group LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.35 | 0.40 | 0.07 | 0.11 | 0.23 | 0.01 | 0.11 | 0.37 | 0.06 | 0.14 | 0.33 | 0.05 |
| 50th-Percentile Queue Length [ft/ln] | 8.77 | 9.95 | 1.73 | 2.77 | 5.79 | 0.33 | 2.77 | 9.13 | 1.44 | 3.49 | 8.35 | 1.15 |
| 95th-Percentile Queue Length [veh/ln] | 0.63 | 0.72 | 0.12 | 0.20 | 0.42 | 0.02 | 0.20 | 0.66 | 0.10 | 0.25 | 0.60 | 0.08 |
| 95th-Percentile Queue Length [ft/ln] | 15.78 | 17.90 | 3.12 | 4.98 | 10.42 | 0.59 | 4.99 | 16.43 | 2.59 | 6.27 | 15.04 | 2.07 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 8.91 | 6.58 | 5.62 | 9.01 | 6.06 | 5.42 | 9.01 | 6.94 | 6.09 | 9.27 | 6.84 | 6.05 |
| Movement LOS | A | A | A | A | A | A | A | A | A | A | A | A |
| d_A, Approach Delay [s/veh] | 7.18 | | | 6.60 | | | 7.13 | | | 7.21 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 7.07 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.248 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|--------|-------|-------|-------|------|--------|--------|--------|-------|--------|-------|
| Vehicle Miles Traveled [mph] | 14.40 | 27.01 | 5.36 | 4.52 | 17.88 | 1.10 | 60.07 | 301.83 | 52.75 | 6.00 | 22.93 | 3.48 |
| Stops [stops/h] | 47.58 | 53.96 | 9.39 | 15.00 | 31.42 | 1.78 | 15.03 | 49.51 | 7.80 | 18.91 | 45.32 | 6.25 |
| Fuel consumption [US gal/h] | 1.33 | 1.94 | 0.36 | 0.42 | 1.20 | 0.07 | 2.32 | 11.25 | 1.95 | 0.54 | 1.62 | 0.23 |
| CO [g/h] | 93.22 | 135.66 | 25.08 | 29.13 | 84.11 | 4.96 | 162.25 | 786.54 | 136.28 | 37.41 | 112.93 | 16.27 |
| NOx [g/h] | 18.14 | 26.39 | 4.88 | 5.67 | 16.37 | 0.97 | 31.57 | 153.03 | 26.52 | 7.28 | 21.97 | 3.16 |
| VOC [g/h] | 21.60 | 31.44 | 5.81 | 6.75 | 19.49 | 1.15 | 37.60 | 182.29 | 31.58 | 8.67 | 26.17 | 3.77 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 3014 | | | 3014 | | | 3014 | | | 3014 | | |
| d_b, Bicycle Delay [s] | 3.41 | | | 3.41 | | | 3.41 | | | 3.41 | | |
| I_b,int, Bicycle LOS Score for Intersection | 2.373 | | | 1.928 | | | 2.086 | | | 2.051 | | |
| Bicycle LOS | B | | | A | | | B | | | B | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



**Intersection Level Of Service Report
Intersection 3: Burgess/School Access**

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Two-way stop | Delay (sec / veh): | 24.7 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | C |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.090 |

Intersection Setup

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|------------------------------|---------------------|--------|--------------|--------|--------------|--------|
| Approach | Southbound | | Eastbound | | Westbound | |
| Lane Configuration | | | | | | |
| Turning Movement | Left | Right | Left | Thru | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 0 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|---|---------------------|--------|--------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 0 | 0 | 0 | 113 | 216 | 0 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 3.1100 | 3.1100 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 9 | 19 | 33 | 0 | 0 | 14 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 9 | 19 | 33 | 351 | 672 | 14 |
| Peak Hour Factor | 0.5000 | 0.5000 | 0.5000 | 0.9200 | 0.9200 | 0.5000 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 5 | 10 | 17 | 95 | 183 | 7 |
| Total Analysis Volume [veh/h] | 18 | 38 | 66 | 382 | 730 | 28 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Stop | Free | Free |
| Flared Lane | No | | |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | No | | |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|-------|-------|------|------|------|------|
| V/C, Movement V/C Ratio | 0.09 | 0.06 | 0.08 | 0.00 | 0.01 | 0.00 |
| d_M, Delay for Movement [s/veh] | 24.72 | 12.55 | 9.60 | 0.00 | 0.00 | 0.00 |
| Movement LOS | C | B | A | A | A | A |
| 95th-Percentile Queue Length [veh/ln] | 0.53 | 0.53 | 0.25 | 0.00 | 0.00 | 0.00 |
| 95th-Percentile Queue Length [ft/ln] | 13.20 | 13.20 | 6.31 | 0.00 | 0.00 | 0.00 |
| d_A, Approach Delay [s/veh] | 16.46 | | 1.41 | | 0.00 | |
| Approach LOS | C | | A | | A | |
| d_I, Intersection Delay [s/veh] | 1.23 | | | | | |
| Intersection LOS | C | | | | | |

Haven School TIS

Vistro File: C:\...\PM 9-12-24.vistro

Scenario 5 2045 Total PM

Report File: C:\...\2045 Total PM.pdf

9/12/2024

Intersection Analysis Summary

| ID | Intersection Name | Control Type | Method | Worst Mvmt | V/C | Delay (s/veh) | LOS |
|----|-----------------------|--------------|-----------------|------------|-------|---------------|-----|
| 1 | Milam/Burgess | Signalized | HCM 7th Edition | SB Left | 0.165 | 2.3 | A |
| 2 | Black Forest/Burgess | Signalized | HCM 7th Edition | WB Left | 0.443 | 8.1 | A |
| 3 | Burgess/School Access | Two-way stop | HCM 7th Edition | SB Left | 0.076 | 21.7 | C |

V/C, Delay, LOS: For two-way stop, these values are taken from the movement with the worst (highest) delay value. For all other control types, they are taken for the whole intersection.

Intersection Level of Service Report
Intersection 1: Milam/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 2.3 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.165 |

Intersection Setup

| Name | Milam Road | | Milam Road | | Burgess Road | |
|------------------------------|------------|--------|------------|--------|--------------|--------|
| Approach | Northbound | | Southbound | | Westbound | |
| Lane Configuration | ↔ | | ↔ | | ↔↔ | |
| Turning Movement | Thru | Right | Left | Thru | Left | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 1 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Curb Present | No | | No | | No | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Milam Road | | Milam Road | | Burgess Road | |
|---|------------|--------|------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 130 | 146 | 22 | 119 | 105 | 23 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | |
| Growth Factor | 1.5700 | 1.5700 | 2.2300 | 2.2300 | 3.1100 | 3.1100 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 0 | 13 | 2 | 0 | 16 | 3 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 204 | 242 | 51 | 265 | 343 | 75 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 55 | 66 | 14 | 72 | 93 | 20 |
| Total Analysis Volume [veh/h] | 222 | 263 | 55 | 288 | 373 | 82 |
| Presence of On-Street Parking | No | No | No | No | No | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | 0 | | 0 | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | 0 | | 0 | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | 0 | | 0 | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |
| Bicycle Volume [bicycles/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | <i>Free Running</i> |
| Actuation Type | <i>Fully actuated</i> |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permissive | Permissive | Permissive | Permissive | Permissive | Permissive |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Signal Group | 2 | 0 | 0 | 6 | 0 | 0 |
| Auxiliary Signal Groups | | | | | | |
| Maximum Green [s] | 40 | 0 | 0 | 40 | 0 | 0 |
| Amber [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| All red [s] | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 |
| Walk [s] | 5 | 0 | 0 | 5 | 0 | 0 |
| Pedestrian Clearance [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | No | | | No | | |
| I1, Start-Up Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| I2, Clearance Lost Time [s] | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|
| Split [s] | 14 | 0 | 0 | 14 | 0 | 0 |
| Lead / Lag | - | - | - | - | - | - |
| Minimum Green [s] | 10 | 0 | 0 | 10 | 0 | 0 |
| Vehicle Extension [s] | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 |
| Minimum Recall | No | | | No | | |
| Maximum Recall | No | | | No | | |
| Pedestrian Recall | No | | | No | | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | C | R | L | C | |
|---|------|------|------|------|--|
| C, Calculated Cycle Length [s] | 17 | 17 | 17 | 17 | |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | |
| l1_p, Permitted Start-Up Lost Time [s] | 0.00 | 0.00 | 2.00 | 0.00 | |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | |
| g_i, Effective Green Time [s] | 9 | 9 | 9 | 9 | |
| g / C, Green / Cycle | 0.53 | 0.53 | 0.53 | 0.53 | |
| (v / s)_i Volume / Saturation Flow Rate | 0.06 | 0.17 | 0.06 | 0.08 | |
| s, saturation flow rate [veh/h] | 3560 | 1589 | 910 | 3560 | |
| c, Capacity [veh/h] | 1896 | 846 | 784 | 1896 | |
| d1, Uniform Delay [s] | 2.01 | 2.26 | 3.27 | 2.05 | |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | |
| d2, Incremental Delay [s] | 0.03 | 0.21 | 0.04 | 0.04 | |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | |

Lane Group Results

| | | | | | |
|---------------------------------------|------|------|------|------|--|
| X, volume / capacity | 0.12 | 0.31 | 0.07 | 0.15 | |
| d, Delay for Lane Group [s/veh] | 2.04 | 2.47 | 3.30 | 2.09 | |
| Lane Group LOS | A | A | A | A | |
| Critical Lane Group | No | Yes | No | No | |
| 50th-Percentile Queue Length [veh/ln] | 0.01 | 0.05 | 0.04 | 0.01 | |
| 50th-Percentile Queue Length [ft/ln] | 0.18 | 1.22 | 1.11 | 0.24 | |
| 95th-Percentile Queue Length [veh/ln] | 0.01 | 0.09 | 0.08 | 0.02 | |
| 95th-Percentile Queue Length [ft/ln] | 0.32 | 2.19 | 1.99 | 0.44 | |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------|-------|------|------|------|------|------|
| d_M, Delay for Movement [s/veh] | 2.04 | 2.47 | 3.30 | 2.09 | 0.00 | 0.00 |
| Movement LOS | A | A | A | A | | |
| d_A, Approach Delay [s/veh] | 2.27 | | 2.29 | | 0.00 | |
| Approach LOS | A | | A | | A | |
| d_I, Intersection Delay [s/veh] | 2.28 | | | | | |
| Intersection LOS | A | | | | | |
| Intersection V/C | 0.165 | | | | | |

Emissions

| | | | | | |
|------------------------------|-------|-------|-------|-------|--|
| Vehicle Miles Traveled [mph] | 11.39 | 13.49 | 3.16 | 16.54 | |
| Stops [stops/h] | 3.01 | 10.21 | 9.29 | 4.06 | |
| Fuel consumption [US gal/h] | 0.52 | 0.72 | 0.26 | 0.74 | |
| CO [g/h] | 36.35 | 50.44 | 18.23 | 51.71 | |
| NOx [g/h] | 7.07 | 9.81 | 3.55 | 10.06 | |
| VOC [g/h] | 8.42 | 11.69 | 4.22 | 11.98 | |

Other Modes

| | | | | | | |
|--|-------|--|-------|--|-------|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | 0.0 | | 0.0 | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | 0.00 | | 0.00 | |
| d_p, Pedestrian Delay [s] | 0.00 | | 0.00 | | 0.00 | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | 0.000 | | 0.000 | |
| Crosswalk LOS | F | | F | | F | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | 2000 | | 2000 | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 4664 | | 4664 | | 0 | |
| d_b, Bicycle Delay [s] | 15.22 | | 15.22 | | 8.58 | |
| I_b,int, Bicycle LOS Score for Intersection | 1.960 | | 1.843 | | 1.560 | |
| Bicycle LOS | A | | A | | A | |

Sequence

| | | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Intersection Level Of Service Report
Intersection 2: Black Forest/Burgess

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Signalized | Delay (sec / veh): | 8.1 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | A |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.443 |

Intersection Setup

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|------------------------------|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| Approach | Northbound | | | Southbound | | | Eastbound | | | Westbound | | |
| Lane Configuration | | | | | | | | | | | | |
| Turning Movement | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right | Left | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 200.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | | 45.00 | | | 45.00 | | | 45.00 | | |
| Grade [%] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| Curb Present | No | | | No | | | No | | | No | | |
| Crosswalk | No | | | No | | | No | | | No | | |

Volumes

| Name | Black Forest Road | | | Black Forest Road | | | Burgess Road | | | Burgess Road | | |
|---|-------------------|--------|--------|-------------------|--------|--------|--------------|--------|--------|--------------|--------|--------|
| | | | | | | | | | | | | |
| Base Volume Input [veh/h] | 20 | 106 | 25 | 28 | 105 | 14 | 16 | 137 | 27 | 23 | 77 | 25 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Proportion of CAVs [%] | 0.00 | | | | | | | | | | | |
| Growth Factor | 3.1500 | 3.1500 | 3.1500 | 1.9100 | 1.9100 | 1.9100 | 3.1100 | 3.1100 | 3.1100 | 1.5700 | 1.5700 | 1.5700 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 6 | 0 | 2 | 0 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Right Turn on Red Volume [veh/h] | 0 | 0 | 40 | 0 | 0 | 14 | 0 | 0 | 45 | 0 | 0 | 20 |
| Total Hourly Volume [veh/h] | 67 | 334 | 39 | 53 | 201 | 13 | 50 | 429 | 45 | 36 | 123 | 19 |
| Peak Hour Factor | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 | 0.9200 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 18 | 91 | 11 | 14 | 55 | 4 | 14 | 117 | 12 | 10 | 33 | 5 |
| Total Analysis Volume [veh/h] | 73 | 363 | 42 | 58 | 218 | 14 | 54 | 466 | 49 | 39 | 134 | 21 |
| Presence of On-Street Parking | No | | No | No | | No | No | | No | No | | No |
| On-Street Parking Maneuver Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Local Bus Stopping Rate [/h] | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| v_do, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_di, Inbound Pedestrian Volume crossing m | 0 | | | 0 | | | 0 | | | 0 | | |
| v_co, Outbound Pedestrian Volume crossing | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ci, Inbound Pedestrian Volume crossing mi | 0 | | | 0 | | | 0 | | | 0 | | |
| v_ab, Corner Pedestrian Volume [ped/h] | 0 | | | 0 | | | 0 | | | 0 | | |
| Bicycle Volume [bicycles/h] | 0 | | | 0 | | | 0 | | | 0 | | |

Intersection Settings

| | |
|---------------------------|---------------------------------------|
| Located in CBD | No |
| Signal Coordination Group | - |
| Cycle Length [s] | 90 |
| Active Pattern | Free Running (No Pattern) |
| Coordination Type | Free Running |
| Actuation Type | Fully actuated |
| Offset [s] | 0.0 |
| Offset Reference | Lead Green - Beginning of First Green |
| Permissive Mode | SingleBand |
| Lost time [s] | 0.00 |

Phasing & Timing (Basic)

| Control Type | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss | Permiss |
|---------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Signal Group | 0 | 2 | 0 | 0 | 6 | 0 | 0 | 4 | 0 | 0 | 8 | 0 |
| Auxiliary Signal Groups | | | | | | | | | | | | |
| Maximum Green [s] | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 | 0 | 40 | 0 |
| Amber [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| All red [s] | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 0.0 |
| Walk [s] | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 0 |
| Pedestrian Clearance [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Delayed Vehicle Green [s] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Rest In Walk | | No | | | No | | | No | | | No | |
| I1, Start-Up Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| I2, Clearance Lost Time [s] | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | 0.0 |
| Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector Length [ft] | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 |
| Advanced Detector Location [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Advanced Detector Length [ft] | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| I, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Phasing & Timing: Free Running (No Pattern)

| | | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Split [s] | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 | 0 | 14 | 0 |
| Lead / Lag | - | - | - | - | - | - | - | - | - | - | - | - |
| Minimum Green [s] | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 | 0 | 10 | 0 |
| Vehicle Extension [s] | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | 0.0 |
| Minimum Recall | | No | | | No | | | No | | | No | |
| Maximum Recall | | No | | | No | | | No | | | No | |
| Pedestrian Recall | | No | | | No | | | No | | | No | |

Exclusive Pedestrian Phase

| | |
|--------------------------|---|
| Pedestrian Signal Group | 0 |
| Pedestrian Walk [s] | 0 |
| Pedestrian Clearance [s] | 0 |

Lane Group Calculations

| Lane Group | L | C | R | L | C | R | L | C | R | L | C | R |
|---|------|------|------|-------|------|------|------|------|------|-------|------|------|
| C, Calculated Cycle Length [s] | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 | 28 |
| L, Total Lost Time per Cycle [s] | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |
| l1_p, Permitted Start-Up Lost Time [s] | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 | 2.00 | 0.00 | 0.00 |
| l2, Clearance Lost Time [s] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| g_i, Effective Green Time [s] | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| g / C, Green / Cycle | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.35 | 0.36 | 0.36 | 0.36 | 0.36 | 0.36 | 0.36 |
| (v / s)_i Volume / Saturation Flow Rate | 0.06 | 0.19 | 0.03 | 0.06 | 0.12 | 0.01 | 0.04 | 0.25 | 0.03 | 0.04 | 0.07 | 0.01 |
| s, saturation flow rate [veh/h] | 1148 | 1870 | 1589 | 980 | 1870 | 1589 | 1232 | 1870 | 1589 | 886 | 1870 | 1589 |
| c, Capacity [veh/h] | 487 | 659 | 560 | 382 | 659 | 560 | 564 | 673 | 572 | 331 | 673 | 572 |
| d1, Uniform Delay [s] | 9.54 | 7.23 | 5.99 | 11.30 | 6.60 | 5.88 | 8.23 | 7.59 | 5.88 | 12.26 | 6.14 | 5.78 |
| k, delay calibration | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 | 0.11 |
| l, Upstream Filtering Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| d2, Incremental Delay [s] | 0.14 | 0.72 | 0.06 | 0.18 | 0.29 | 0.02 | 0.07 | 1.29 | 0.06 | 0.16 | 0.14 | 0.03 |
| d3, Initial Queue Delay [s] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Rp, platoon ratio | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| PF, progression factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Lane Group Results

| | | | | | | | | | | | | |
|---------------------------------------|-------|-------|------|-------|-------|------|------|-------|------|-------|-------|------|
| X, volume / capacity | 0.15 | 0.55 | 0.07 | 0.15 | 0.33 | 0.02 | 0.10 | 0.69 | 0.09 | 0.12 | 0.20 | 0.04 |
| d, Delay for Lane Group [s/veh] | 9.68 | 7.95 | 6.04 | 11.48 | 6.89 | 5.90 | 8.30 | 8.88 | 5.95 | 12.42 | 6.28 | 5.80 |
| Lane Group LOS | A | A | A | B | A | A | A | A | A | B | A | A |
| Critical Lane Group | No | Yes | No | No | No | No | No | Yes | No | No | No | No |
| 50th-Percentile Queue Length [veh/ln] | 0.22 | 0.77 | 0.07 | 0.21 | 0.40 | 0.02 | 0.14 | 1.09 | 0.08 | 0.16 | 0.23 | 0.03 |
| 50th-Percentile Queue Length [ft/ln] | 5.56 | 19.27 | 1.75 | 5.37 | 10.08 | 0.57 | 3.45 | 27.34 | 1.99 | 3.95 | 5.63 | 0.83 |
| 95th-Percentile Queue Length [veh/ln] | 0.40 | 1.39 | 0.13 | 0.39 | 0.73 | 0.04 | 0.25 | 1.97 | 0.14 | 0.28 | 0.41 | 0.06 |
| 95th-Percentile Queue Length [ft/ln] | 10.01 | 34.68 | 3.15 | 9.67 | 18.15 | 1.03 | 6.20 | 49.22 | 3.58 | 7.11 | 10.13 | 1.50 |

Movement, Approach, & Intersection Results

| | | | | | | | | | | | | |
|---------------------------------|-------|------|------|-------|------|------|------|------|------|-------|------|------|
| d_M, Delay for Movement [s/veh] | 9.68 | 7.95 | 6.04 | 11.48 | 6.89 | 5.90 | 8.30 | 8.88 | 5.95 | 12.42 | 6.28 | 5.80 |
| Movement LOS | A | A | A | B | A | A | A | A | A | B | A | A |
| d_A, Approach Delay [s/veh] | 8.05 | | | 7.76 | | | 8.58 | | | 7.47 | | |
| Approach LOS | A | | | A | | | A | | | A | | |
| d_I, Intersection Delay [s/veh] | 8.12 | | | | | | | | | | | |
| Intersection LOS | A | | | | | | | | | | | |
| Intersection V/C | 0.443 | | | | | | | | | | | |

Emissions

| | | | | | | | | | | | | |
|------------------------------|-------|--------|-------|-------|--------|------|--------|---------|--------|-------|-------|-------|
| Vehicle Miles Traveled [mph] | 7.67 | 38.15 | 4.41 | 6.40 | 24.06 | 1.54 | 79.12 | 682.79 | 71.80 | 4.68 | 16.09 | 2.52 |
| Stops [stops/h] | 28.90 | 100.09 | 9.08 | 27.91 | 52.38 | 2.96 | 17.90 | 142.05 | 10.33 | 20.52 | 29.24 | 4.33 |
| Fuel consumption [US gal/h] | 0.77 | 3.14 | 0.32 | 0.70 | 1.78 | 0.11 | 3.03 | 26.01 | 2.65 | 0.51 | 1.09 | 0.17 |
| CO [g/h] | 53.56 | 219.47 | 22.08 | 49.07 | 124.52 | 7.45 | 211.51 | 1818.32 | 185.15 | 35.94 | 75.93 | 11.54 |
| NOx [g/h] | 10.42 | 42.70 | 4.30 | 9.55 | 24.23 | 1.45 | 41.15 | 353.78 | 36.02 | 6.99 | 14.77 | 2.24 |
| VOC [g/h] | 12.41 | 50.86 | 5.12 | 11.37 | 28.86 | 1.73 | 49.02 | 421.41 | 42.91 | 8.33 | 17.60 | 2.67 |

Other Modes

| | | | | | | | | | | | | |
|--|-------|--|--|-------|--|--|-------|--|--|-------|--|--|
| g_Walk,mi, Effective Walk Time [s] | 0.0 | | | 0.0 | | | 0.0 | | | 0.0 | | |
| M_corner, Corner Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| M_CW, Crosswalk Circulation Area [ft ² /ped] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| d_p, Pedestrian Delay [s] | 0.00 | | | 0.00 | | | 0.00 | | | 0.00 | | |
| I_p,int, Pedestrian LOS Score for Intersectio | 0.000 | | | 0.000 | | | 0.000 | | | 0.000 | | |
| Crosswalk LOS | F | | | F | | | F | | | F | | |
| s_b, Saturation Flow Rate of the bicycle lane | 2000 | | | 2000 | | | 2000 | | | 2000 | | |
| c_b, Capacity of the bicycle lane [bicycles/h] | 2886 | | | 2886 | | | 2886 | | | 2886 | | |
| d_b, Bicycle Delay [s] | 2.72 | | | 2.72 | | | 2.72 | | | 2.72 | | |
| I_b,int, Bicycle LOS Score for Intersection | 2.414 | | | 2.061 | | | 2.573 | | | 1.913 | | |
| Bicycle LOS | B | | | B | | | B | | | A | | |

Sequence

| | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Ring 1 | - | 2 | - | 4 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 2 | - | 6 | - | 8 | - | - | - | - | - | - | - | - | - | - | - |
| Ring 3 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Ring 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |



Intersection Level Of Service Report
Intersection 3: Burgess/School Access

| | | | |
|------------------|-----------------|---------------------------|-------|
| Control Type: | Two-way stop | Delay (sec / veh): | 21.7 |
| Analysis Method: | HCM 7th Edition | Level Of Service: | C |
| Analysis Period: | 15 minutes | Volume to Capacity (v/c): | 0.076 |

Intersection Setup

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|------------------------------|---------------------|--------|--------------|--------|--------------|--------|
| Approach | Southbound | | Eastbound | | Westbound | |
| Lane Configuration | ↵ | | ↵ | | ↵ | |
| Turning Movement | Left | Right | Left | Thru | Thru | Right |
| Lane Width [ft] | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 | 12.00 |
| No. of Lanes in Entry Pocket | 0 | 0 | 1 | 0 | 0 | 0 |
| Entry Pocket Length [ft] | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 | 100.00 |
| No. of Lanes in Exit Pocket | 0 | 0 | 0 | 0 | 0 | 0 |
| Exit Pocket Length [ft] | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Speed [mph] | 45.00 | | 45.00 | | 45.00 | |
| Grade [%] | 0.00 | | 0.00 | | 0.00 | |
| Crosswalk | No | | No | | No | |

Volumes

| Name | Haven School Access | | Burgess Road | | Burgess Road | |
|---|---------------------|--------|--------------|--------|--------------|--------|
| Base Volume Input [veh/h] | 0 | 0 | 0 | 113 | 216 | 0 |
| Base Volume Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Heavy Vehicles Percentage [%] | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Growth Factor | 1.0000 | 1.0000 | 1.0000 | 3.1100 | 3.1100 | 1.0000 |
| In-Process Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Site-Generated Trips [veh/h] | 9 | 19 | 15 | 0 | 0 | 6 |
| Diverted Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Pass-by Trips [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Existing Site Adjustment Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Other Volume [veh/h] | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Hourly Volume [veh/h] | 9 | 19 | 15 | 351 | 672 | 6 |
| Peak Hour Factor | 0.5000 | 0.5000 | 0.5000 | 0.9200 | 0.9200 | 0.5000 |
| Other Adjustment Factor | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 | 1.0000 |
| Total 15-Minute Volume [veh/h] | 5 | 10 | 8 | 95 | 183 | 3 |
| Total Analysis Volume [veh/h] | 18 | 38 | 30 | 382 | 730 | 12 |
| Pedestrian Volume [ped/h] | 0 | | 0 | | 0 | |

Intersection Settings

| | | | |
|------------------------------------|------|------|------|
| Priority Scheme | Stop | Free | Free |
| Flared Lane | No | | |
| Storage Area [veh] | 0 | 0 | 0 |
| Two-Stage Gap Acceptance | No | | |
| Number of Storage Spaces in Median | 0 | 0 | 0 |

Movement, Approach, & Intersection Results

| | | | | | | |
|---------------------------------------|-------|-------|------|------|------|------|
| V/C, Movement V/C Ratio | 0.08 | 0.06 | 0.03 | 0.00 | 0.01 | 0.00 |
| d_M, Delay for Movement [s/veh] | 21.65 | 12.14 | 9.33 | 0.00 | 0.00 | 0.00 |
| Movement LOS | C | B | A | A | A | A |
| 95th-Percentile Queue Length [veh/ln] | 0.47 | 0.47 | 0.11 | 0.00 | 0.00 | 0.00 |
| 95th-Percentile Queue Length [ft/ln] | 11.78 | 11.78 | 2.71 | 0.00 | 0.00 | 0.00 |
| d_A, Approach Delay [s/veh] | 15.20 | | 0.68 | | 0.00 | |
| Approach LOS | C | | A | | A | |
| d_I, Intersection Delay [s/veh] | 0.93 | | | | | |
| Intersection LOS | C | | | | | |

Appendix E

Traffic Signal Warrant Analysis



Traffic Signal Warrant Analysis

| | |
|-----------------------|-------------------|
| Project Name | Haven School TIS |
| Project/File # | Haven School |
| Scenario | Year 2024 Traffic |

| Intersection Information | |
|------------------------------------|-------------------|
| Major Street Name | Milam Road |
| North/South or East/West | N/S |
| Speed Limit | 45 mph or greater |
| # of Approach Lanes | 1 |
| % of Right Turn Traffic to Include | 0% |
| | |
| Minor Street Name | Burgess Road |
| # of Approach Lanes | 1 |
| % of Right Turn Traffic to Include | 50% |
| Isolated Community < 10,000 pop | No |

| What Additional Warrants to Consider? | |
|--|----|
| Warrant 3, Peak Hour (A - Vol. and Delay) | No |
| Warrant 4, Pedestrian Volume | No |
| Warrant 5, School Crossing | No |
| Warrant 6, Coordinated Signal System | No |
| Warrant 7, Crash Experience | No |
| Warrant 8, Roadway Network | No |
| Warrant 9, Intersection Near a Grade Crossing | No |
| All-Way Stop Warrant | No |

Sustainable Traffic Solutions, Inc.



Traffic Signal Warrant Analysis

Milam Road (Major Street) Volume

| Northbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 0 | 21 | 19 | |
| 7 - 8 AM | 0 | 70 | 96 | |
| 8 - 9 AM | 0 | 69 | 158 | |
| 9 - 10 AM | 0 | 55 | 93 | |
| 10 - 11 AM | 0 | 57 | 101 | |
| 11 - 12 PM | 0 | 78 | 164 | |
| 12 - 1 PM | 0 | 81 | 125 | |
| 1 - 2 PM | 0 | 56 | 130 | |
| 2 - 3 PM | 0 | 68 | 156 | |
| 3 - 4 PM | 0 | 106 | 223 | |
| 4 - 5 PM | 0 | 133 | 285 | |
| 5 - 6 PM | 0 | 144 | 260 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 2,748 | 0 |

| Southbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 1 | 56 | 0 | |
| 7 - 8 AM | 19 | 139 | 0 | |
| 8 - 9 AM | 20 | 103 | 0 | |
| 9 - 10 AM | 10 | 72 | 1 | |
| 10 - 11 AM | 12 | 82 | 1 | |
| 11 - 12 PM | 15 | 95 | 0 | |
| 12 - 1 PM | 23 | 71 | 0 | |
| 1 - 2 PM | 22 | 72 | 0 | |
| 2 - 3 PM | 17 | 77 | 0 | |
| 3 - 4 PM | 32 | 83 | 0 | |
| 4 - 5 PM | 35 | 107 | 0 | |
| 5 - 6 PM | 27 | 90 | 0 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 1,282 | 0 |

Burgess Road (Minor Street) Volume

| Eastbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 0 | 0 | 0 | |
| 7 - 8 AM | 0 | 0 | 0 | |
| 8 - 9 AM | 0 | 0 | 0 | |
| 9 - 10 AM | 0 | 0 | 0 | |
| 10 - 11 AM | 0 | 1 | 1 | |
| 11 - 12 PM | 0 | 1 | 0 | |
| 12 - 1 PM | 0 | 0 | 0 | |
| 1 - 2 PM | 1 | 0 | 0 | |
| 2 - 3 PM | 0 | 0 | 0 | |
| 3 - 4 PM | 0 | 0 | 0 | |
| 4 - 5 PM | 0 | 1 | 0 | |
| 5 - 6 PM | 0 | 0 | 0 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 5 | 0 |

| Westbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 146 | 0 | 16 | |
| 7 - 8 AM | 275 | 0 | 26 | |
| 8 - 9 AM | 235 | 0 | 19 | |
| 9 - 10 AM | 165 | 0 | 23 | |
| 10 - 11 AM | 155 | 0 | 16 | |
| 11 - 12 PM | 137 | 0 | 17 | |
| 12 - 1 PM | 110 | 0 | 26 | |
| 1 - 2 PM | 115 | 0 | 10 | |
| 2 - 3 PM | 138 | 0 | 16 | |
| 3 - 4 PM | 177 | 0 | 27 | |
| 4 - 5 PM | 147 | 1 | 13 | |
| 5 - 6 PM | 147 | 0 | 12 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 2,169 | 0 |



Traffic Signal Warrant Analysis

Warrants 1 - 3 (Volume Warrants)

| | |
|-----------------------|-------------------|
| Project Name | Haven School TIS |
| Project/File # | Haven School |
| Scenario | Year 2024 Traffic |

| Intersection Information | | | |
|--------------------------|---------------------|-------------------------|--------------------|
| Major Street (N/S Road) | Milam Road | Minor Street (E/W Road) | Burgess Road |
| Analyzed with | 1 approach lane | Analyzed with | 1 Approach Lane |
| Total Approach Volume | 4030 vehicles | Total Approach Volume | 2174 vehicles |
| Total Ped/Bike Volume | 0 crossings | Total Ped/Bike Volume | 0 crossings |
| Right turn reduction of | 100 percent applied | Right turn reduction of | 50 percent applied |

No high speed or isolated community reduction applied to the Volume Warrant thresholds.


| Warrant 1, Eight Hour Vehicular Volume | | | |
|--|----------------------|----------------------|-------------------------------|
| | Condition A | Condition B | Condition A+B* |
| Condition Satisfied? | Not Satisfied | Not Satisfied | Not Satisfied |
| Required values reached for | 0 hours | 0 hours | 0 (Cond. A) & 0 (Cond. B) |
| Criteria - Major Street (veh/hr) | 350 | 525 | 280 (Cond. A) & 420 (Cond. B) |
| Criteria - Minor Street (veh/hr) | 105 | 53 | 84 (Cond. A) & 42 (Cond. B) |

* Should be applied only after an adequate trial of other alternatives that could cause less delay and inconvenience to traffic has failed to solve the traffic problems.

| Warrant 2, Four Hour Vehicular Volume | |
|---------------------------------------|----------------------|
| Condition Satisfied? | Not Satisfied |
| Required values reached for | 1 hour |
| Criteria | See Figure Below |

| Warrant 3, Peak Hour Vehicular Volume | | |
|--|---------------------|----------------------|
| | Condition A | Condition B |
| Condition Satisfied? | Not Examined | Not Satisfied |
| Required values reached for | | 0 hours |
| Criteria - Total Approach Volume (veh in one hour) | | See Figure Below |
| Criteria - Minor Street High Side Volume (veh in one hour) | | |
| Criteria - Minor Street High Side Delay (veh-hrs) | | |

Figure 4C-2 (Warrant 2 - 70% Factor) & Figure 4C-4 (Warrant 3 - 70% Factor)

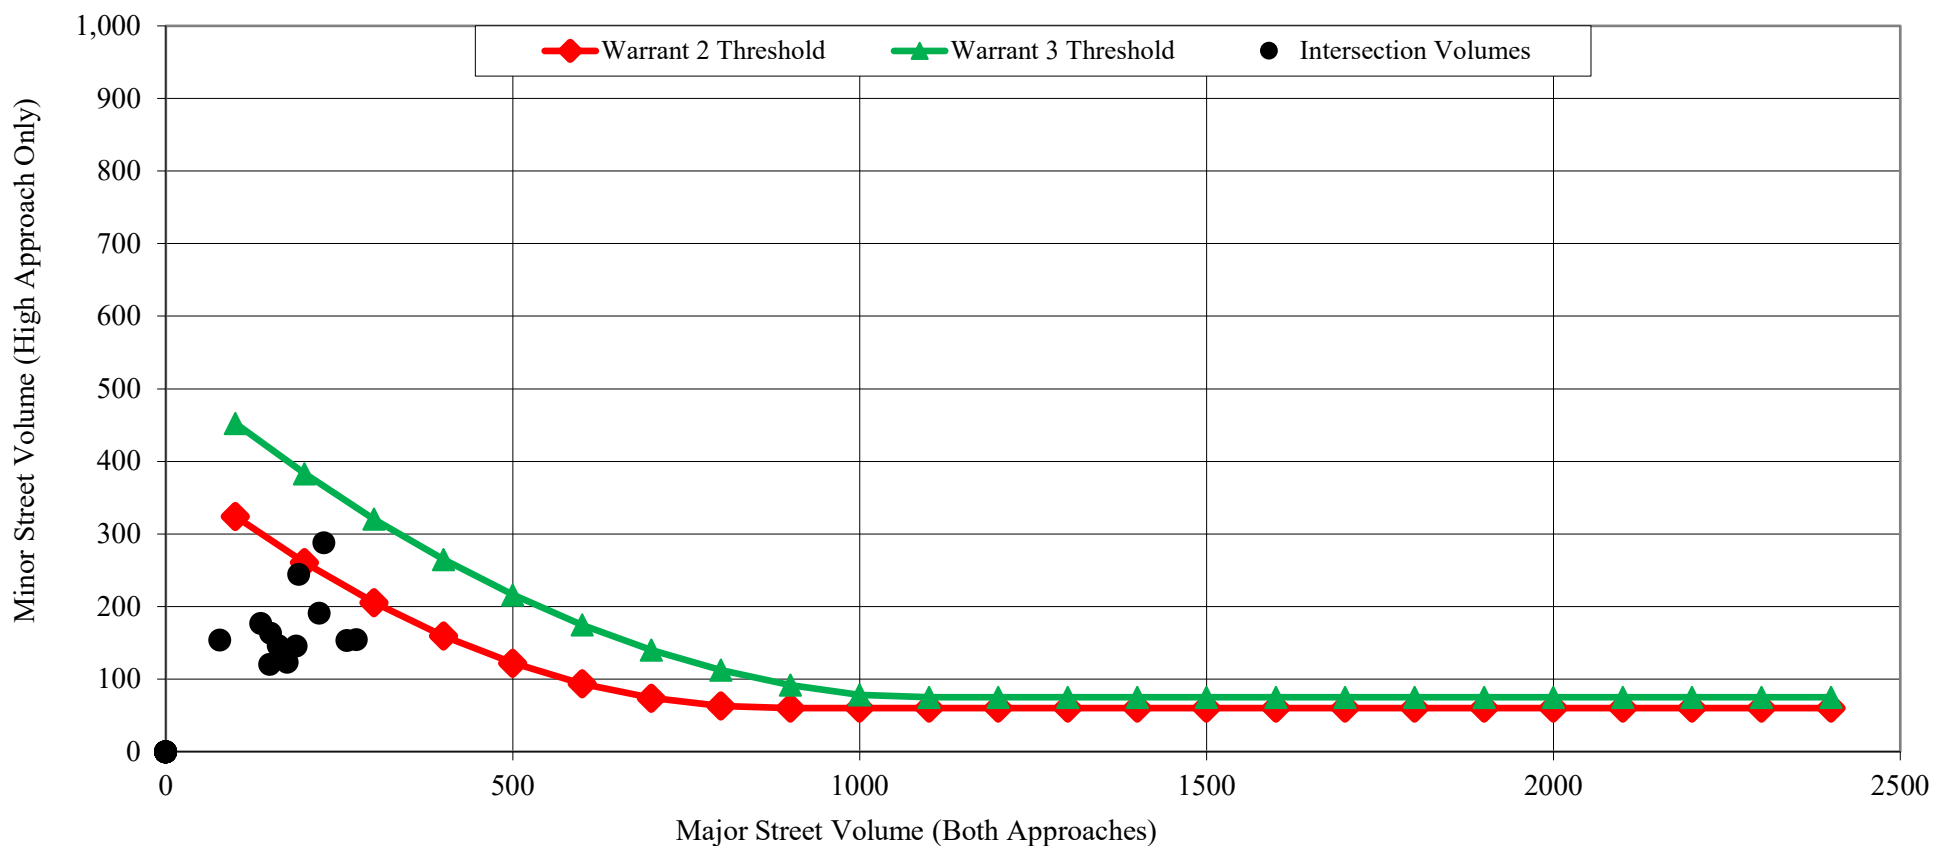



Traffic Signal Warrant Analysis

| | |
|-----------------------|------------------|
| Project Name | Haven School TIS |
| Project/File # | Haven School |
| Scenario | Year 2045 Total |

| Intersection Information | |
|------------------------------------|-------------------|
| Major Street Name | Milam Road |
| North/South or East/West | N/S |
| Speed Limit | 45 mph or greater |
| # of Approach Lanes | 2 or more |
| % of Right Turn Traffic to Include | 0% |
| Minor Street Name | Burgess Road |
| # of Approach Lanes | 1 |
| % of Right Turn Traffic to Include | 50% |
| Isolated Community < 10,000 pop | No |

| What Additional Warrants to Consider? | |
|---|----|
| Warrant 3, Peak Hour (A - Vol. and Delay) | No |
| Warrant 4, Pedestrian Volume | No |
| Warrant 5, School Crossing | No |
| Warrant 6, Coordinated Signal System | No |
| Warrant 7, Crash Experience | No |
| Warrant 8, Roadway Network | No |
| Warrant 9, Intersection Near a Grade Crossing | No |
| All-Way Stop Warrant | No |

Sustainable Traffic Solutions, Inc.



Traffic Signal Warrant Analysis

Milam Road (Major Street) Volume

| Northbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 0 | 33 | 30 | |
| 7 - 8 AM | 0 | 110 | 149 | |
| 8 - 9 AM | 0 | 108 | 263 | |
| 9 - 10 AM | 0 | 86 | 146 | |
| 10 - 11 AM | 0 | 89 | 158 | |
| 11 - 12 PM | 0 | 122 | 257 | |
| 12 - 1 PM | 0 | 127 | 196 | |
| 1 - 2 PM | 0 | 88 | 204 | |
| 2 - 3 PM | 0 | 106 | 244 | |
| 3 - 4 PM | 0 | 166 | 349 | |
| 4 - 5 PM | 0 | 208 | 446 | |
| 5 - 6 PM | 0 | 226 | 407 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 4,318 | 0 |

| Southbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 2 | 125 | 0 | |
| 7 - 8 AM | 42 | 310 | 0 | |
| 8 - 9 AM | 45 | 230 | 0 | |
| 9 - 10 AM | 22 | 160 | 1 | |
| 10 - 11 AM | 27 | 183 | 1 | |
| 11 - 12 PM | 33 | 212 | 0 | |
| 12 - 1 PM | 51 | 158 | 0 | |
| 1 - 2 PM | 49 | 160 | 0 | |
| 2 - 3 PM | 38 | 172 | 0 | |
| 3 - 4 PM | 71 | 185 | 0 | |
| 4 - 5 PM | 78 | 238 | 0 | |
| 5 - 6 PM | 60 | 201 | 0 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 2,854 | 0 |

Burgess Road (Minor Street) Volume

| Eastbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 0 | 0 | 0 | |
| 7 - 8 AM | 0 | 0 | 0 | |
| 8 - 9 AM | 0 | 0 | 0 | |
| 9 - 10 AM | 0 | 0 | 0 | |
| 10 - 11 AM | 0 | 1 | 1 | |
| 11 - 12 PM | 0 | 1 | 0 | |
| 12 - 1 PM | 0 | 0 | 0 | |
| 1 - 2 PM | 1 | 0 | 0 | |
| 2 - 3 PM | 0 | 0 | 0 | |
| 3 - 4 PM | 0 | 0 | 0 | |
| 4 - 5 PM | 0 | 1 | 0 | |
| 5 - 6 PM | 0 | 0 | 0 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 5 | 0 |

| Westbound Volume by Hour | | | | |
|-----------------------------|------------|---------|-------------|------------|
| Time | Left Turns | Through | Right Turns | Peds/Bikes |
| 12 - 1 AM | | | | |
| 1 - 2 AM | | | | |
| 2 - 3 AM | | | | |
| 3 - 4 AM | | | | |
| 4 - 5 AM | | | | |
| 5 - 6 AM | | | | |
| 6 - 7 AM | 453 | 0 | 50 | |
| 7 - 8 AM | 854 | 0 | 81 | |
| 8 - 9 AM | 730 | 0 | 59 | |
| 9 - 10 AM | 512 | 0 | 71 | |
| 10 - 11 AM | 481 | 0 | 50 | |
| 11 - 12 PM | 425 | 0 | 53 | |
| 12 - 1 PM | 342 | 0 | 81 | |
| 1 - 2 PM | 357 | 0 | 31 | |
| 2 - 3 PM | 428 | 0 | 50 | |
| 3 - 4 PM | 550 | 0 | 84 | |
| 4 - 5 PM | 456 | 1 | 40 | |
| 5 - 6 PM | 456 | 0 | 37 | |
| 6 - 7 PM | | | | |
| 7 - 8 PM | | | | |
| 8 - 9 PM | | | | |
| 9 - 10 PM | | | | |
| 10 - 11 PM | | | | |
| 11 - 12 AM | | | | |
| Total Vehicles (unadjusted) | | | 6,732 | 0 |



Traffic Signal Warrant Analysis

Warrants 1 - 3 (Volume Warrants)

| | |
|----------------|------------------|
| Project Name | Haven School TIS |
| Project/File # | Haven School |
| Scenario | Year 2045 Total |

| Intersection Information | | | |
|--------------------------|--------------------------|-------------------------|--------------------|
| Major Street (N/S Road) | Milam Road | Minor Street (E/W Road) | Burgess Road |
| Analyzed with | 2 or more approach lanes | Analyzed with | 1 Approach Lane |
| Total Approach Volume | 7172 vehicles | Total Approach Volume | 6737 vehicles |
| Total Ped/Bike Volume | 0 crossings | Total Ped/Bike Volume | 0 crossings |
| Right turn reduction of | 100 percent applied | Right turn reduction of | 50 percent applied |

No high speed or isolated community reduction applied to the Volume Warrant thresholds.


| Warrant 1, Eight Hour Vehicular Volume | | | |
|--|---------------|---------------|-------------------------------|
| | Condition A | Condition B | Condition A+B* |
| Condition Satisfied? | Not Satisfied | Not Satisfied | Not Satisfied |
| Required values reached for | 4 hours | 0 hours | 7 (Cond. A) & 1 (Cond. B) |
| Criteria - Major Street (veh/hr) | 420 | 630 | 336 (Cond. A) & 504 (Cond. B) |
| Criteria - Minor Street (veh/hr) | 105 | 53 | 84 (Cond. A) & 42 (Cond. B) |

* Should be applied only after an adequate trial of other alternatives that could cause less delay and inconvenience to traffic has failed to solve the traffic problems.

| Warrant 2, Four Hour Vehicular Volume | |
|---------------------------------------|------------------|
| Condition Satisfied? | Satisfied |
| Required values reached for | 12 hours |
| Criteria | See Figure Below |

| Warrant 3, Peak Hour Vehicular Volume | | |
|--|--------------|------------------|
| | Condition A | Condition B |
| Condition Satisfied? | Not Examined | Satisfied |
| Required values reached for | | 11 hours |
| Criteria - Total Approach Volume (veh in one hour) | | See Figure Below |
| Criteria - Minor Street High Side Volume (veh in one hour) | | |
| Criteria - Minor Street High Side Delay (veh-hrs) | | |

Figure 4C-2 (Warrant 2 - 70% Factor) & Figure 4C-4 (Warrant 3 - 70% Factor)

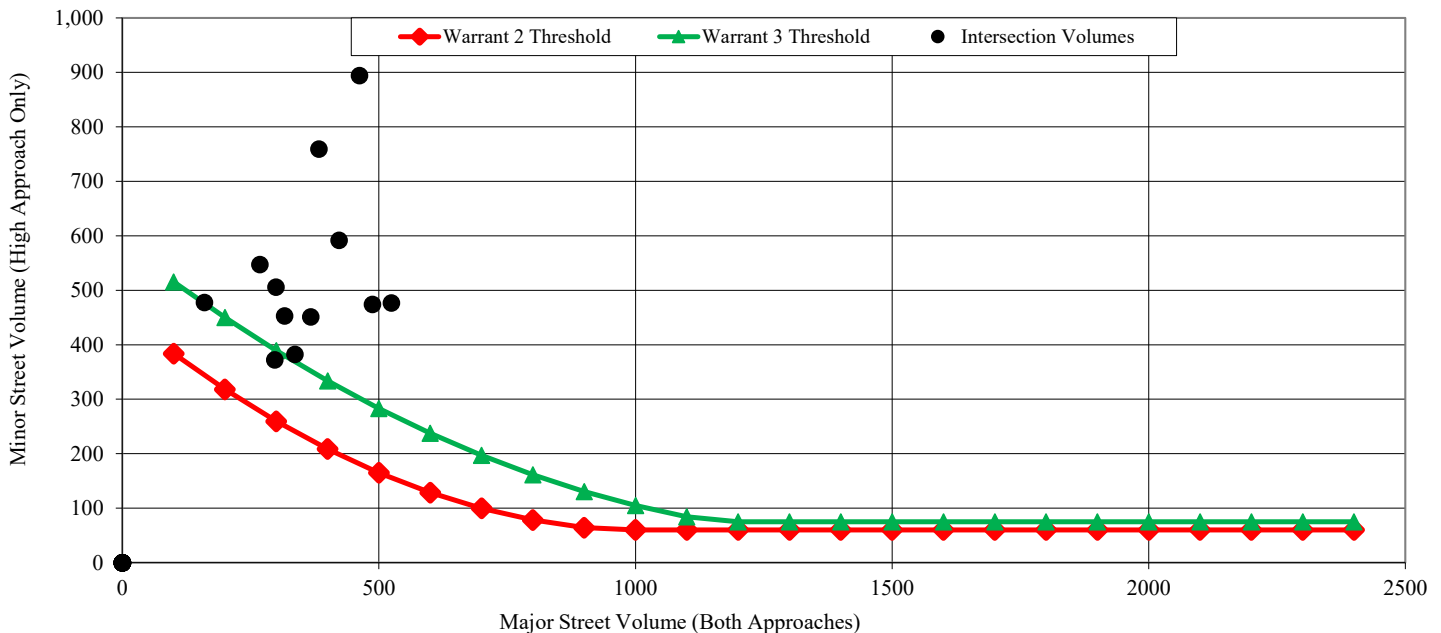



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Pedestrian Crossing | | | | | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|---------------------|------|------|-------|-------|-------|-------|------|------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | Total | North | South | East | West |
| 6:00 | 0 | 0 | 3 | 2 | 0 | 0 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 19 | 0 | 4 | 34 | 0 | 0 | 0 | 0 |
| 6:15 | 0 | 0 | 5 | 6 | 0 | 0 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 2 | 56 | 0 | 0 | 0 | 0 |
| 6:30 | 0 | 0 | 5 | 1 | 0 | 0 | 11 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 7 | 65 | 0 | 0 | 0 | 0 |
| 6:45 | 0 | 0 | 8 | 10 | 0 | 1 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 57 | 0 | 3 | 104 | 0 | 0 | 0 | 0 |
| 7:00 | 0 | 0 | 7 | 14 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 61 | 0 | 6 | 118 | 0 | 0 | 0 | 0 |
| 7:15 | 0 | 0 | 18 | 17 | 0 | 4 | 37 | 0 | 0 | 0 | 0 | 0 | 0 | 75 | 0 | 1 | 152 | 0 | 0 | 0 | 0 |
| 7:30 | 0 | 0 | 19 | 31 | 0 | 7 | 36 | 0 | 0 | 0 | 0 | 0 | 0 | 68 | 0 | 7 | 168 | 0 | 0 | 0 | 0 |
| 7:45 | 0 | 0 | 26 | 33 | 0 | 3 | 41 | 0 | 0 | 0 | 0 | 0 | 0 | 71 | 0 | 12 | 186 | 0 | 0 | 0 | 0 |
| 8:00 | 0 | 0 | 20 | 28 | 0 | 6 | 31 | 0 | 0 | 0 | 0 | 0 | 0 | 64 | 0 | 4 | 153 | 0 | 0 | 0 | 0 |
| 8:15 | 0 | 0 | 17 | 40 | 0 | 4 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 47 | 0 | 3 | 133 | 0 | 0 | 0 | 0 |
| 8:30 | 0 | 0 | 16 | 50 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 62 | 0 | 6 | 164 | 0 | 0 | 0 | 0 |
| 8:45 | 0 | 0 | 16 | 50 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 62 | 0 | 6 | 164 | 0 | 0 | 0 | 0 |
| 9:00 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 | 0 | 0 | 0 | 0 |
| 9:15 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 | 0 | 0 | 0 | 0 |
| 9:30 | 0 | 0 | 13 | 24 | 0 | 1 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 47 | 0 | 3 | 108 | 0 | 0 | 0 | 0 |
| 9:45 | 0 | 0 | 12 | 23 | 0 | 3 | 26 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 101 | 0 | 0 | 0 | 0 |
| 10:00 | 0 | 0 | 12 | 23 | 0 | 3 | 26 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 101 | 0 | 0 | 0 | 0 |
| 10:15 | 0 | 0 | 11 | 27 | 0 | 4 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 28 | 0 | 3 | 95 | 0 | 0 | 0 | 0 |
| 10:30 | 0 | 0 | 16 | 24 | 0 | 3 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 47 | 0 | 2 | 106 | 0 | 0 | 0 | 0 |
| 10:45 | 0 | 0 | 18 | 27 | 0 | 2 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 50 | 0 | 5 | 124 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 18 | 27 | 0 | 2 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 50 | 0 | 5 | 124 | 0 | 0 | 0 | 0 |
| 11:15 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 | 0 | 0 | 0 | 0 |
| 11:30 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 | 0 | 0 | 0 | 0 |
| 11:45 | 0 | 0 | 16 | 31 | 0 | 5 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 103 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 0 | 22 | 31 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 8 | 116 | 0 | 0 | 0 | 0 |
| 12:15 | 0 | 0 | 22 | 31 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 8 | 116 | 0 | 0 | 0 | 0 |
| 12:30 | 0 | 1 | 22 | 34 | 0 | 3 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 20 | 0 | 8 | 109 | 0 | 0 | 0 | 0 |
| 12:45 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 | 0 | 0 | 0 | 0 |
| 13:15 | 0 | 1 | 13 | 37 | 0 | 6 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 27 | 0 | 3 | 108 | 0 | 0 | 0 | 0 |
| 13:30 | 0 | 0 | 13 | 29 | 0 | 6 | 16 | 0 | 0 | 1 | 0 | 0 | 0 | 39 | 0 | 3 | 107 | 0 | 0 | 0 | 0 |
| 13:45 | 0 | 0 | 15 | 35 | 0 | 4 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 23 | 0 | 2 | 96 | 0 | 0 | 0 | 0 |
| 14:00 | 0 | 0 | 19 | 42 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 4 | 117 | 0 | 0 | 0 | 0 |
| 14:15 | 0 | 0 | 20 | 41 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 5 | 120 | 0 | 0 | 0 | 0 |
| 14:30 | 0 | 0 | 13 | 38 | 0 | 8 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 0 | 5 | 112 | 0 | 0 | 0 | 0 |
| 14:45 | 0 | 0 | 16 | 35 | 0 | 1 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 2 | 123 | 0 | 0 | 0 | 0 |
| 15:00 | 0 | 0 | 17 | 49 | 0 | 9 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 132 | 0 | 0 | 0 | 0 |
| 15:15 | 0 | 0 | 29 | 56 | 0 | 6 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 50 | 0 | 8 | 171 | 0 | 0 | 0 | 0 |
| 15:30 | 0 | 0 | 30 | 69 | 0 | 9 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 60 | 0 | 8 | 192 | 0 | 0 | 0 | 0 |
| 15:45 | 0 | 0 | 30 | 49 | 0 | 8 | 24 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 5 | 153 | 0 | 0 | 0 | 0 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | Pedestrian Crossing | | | | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|---------------------|------|------|-------|-------|-------|------|------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right | North | South | East | West |
| 16:00 | 0 | 0 | 31 | 81 | 0 | 17 | 26 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 3 | 202 | 0 | 0 | 0 | 0 |
| 16:15 | 0 | 0 | 44 | 61 | 0 | 6 | 34 | 0 | 0 | 0 | 0 | 0 | 0 | 31 | 0 | 6 | 182 | 0 | 0 | 0 | 0 |
| 16:30 | 0 | 0 | 33 | 76 | 0 | 7 | 26 | 0 | 0 | 0 | 1 | 0 | 1 | 35 | 0 | 1 | 180 | 0 | 0 | 0 | 0 |
| 16:45 | 0 | 0 | 25 | 67 | 0 | 5 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 1 | 3 | 159 | 0 | 0 | 0 | 0 |
| 17:00 | 0 | 0 | 36 | 65 | 0 | 6 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 160 | 0 | 0 | 0 | 0 |
| 17:15 | 0 | 0 | 31 | 76 | 0 | 7 | 39 | 0 | 0 | 0 | 0 | 0 | 0 | 43 | 0 | 1 | 197 | 0 | 0 | 0 | 0 |
| 17:30 | 0 | 0 | 47 | 69 | 0 | 8 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 6 | 183 | 0 | 0 | 0 | 0 |
| 17:45 | 0 | 0 | 30 | 50 | 0 | 6 | 15 | 0 | 0 | 0 | 0 | 0 | 0 | 38 | 0 | 1 | 140 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 2 | 938 | 1819 | 0 | 233 | 1047 | 2 | 0 | 1 | 3 | 1 | 1 | 1947 | 1 | 221 | 6216 | 0 | 0 | 0 | 0 |
| % Trucks | 0% | 0% | 1% | 1% | 0% | 3% | 1% | 0% | 0% | 0% | 0% | 0% | 0% | 1% | 0% | 1% | 1% | --- | --- | --- | --- |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | Pedestrian Crossing | | | | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|---------------------|------|------|-------|-------|-------|------|------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right | North | South | East | West |
| 6:00 | 0 | 0 | 21 | 19 | 0 | 1 | 56 | 0 | 0 | 0 | 0 | 0 | 0 | 146 | 0 | 16 | 259 | 0 | 0 | 0 | 0 |
| 7:00 | 0 | 0 | 70 | 95 | 0 | 19 | 139 | 0 | 0 | 0 | 0 | 0 | 0 | 275 | 0 | 26 | 624 | 0 | 0 | 0 | 0 |
| 8:00 | 0 | 0 | 69 | 168 | 0 | 20 | 103 | 0 | 0 | 0 | 0 | 0 | 0 | 235 | 0 | 19 | 614 | 0 | 0 | 0 | 0 |
| 9:00 | 0 | 0 | 55 | 93 | 0 | 10 | 72 | 1 | 0 | 0 | 0 | 0 | 0 | 165 | 0 | 23 | 419 | 0 | 0 | 0 | 0 |
| 10:00 | 0 | 0 | 57 | 101 | 0 | 12 | 82 | 1 | 0 | 0 | 1 | 1 | 0 | 155 | 0 | 16 | 426 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 78 | 164 | 0 | 15 | 95 | 0 | 0 | 0 | 1 | 0 | 0 | 137 | 0 | 17 | 507 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 1 | 81 | 125 | 0 | 23 | 71 | 0 | 0 | 0 | 0 | 0 | 0 | 110 | 0 | 26 | 437 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 1 | 56 | 130 | 0 | 22 | 72 | 0 | 0 | 1 | 0 | 0 | 0 | 115 | 0 | 10 | 407 | 0 | 0 | 0 | 0 |
| 14:00 | 0 | 0 | 68 | 156 | 0 | 17 | 77 | 0 | 0 | 0 | 0 | 0 | 0 | 138 | 0 | 16 | 472 | 0 | 0 | 0 | 0 |
| 15:00 | 0 | 0 | 106 | 223 | 0 | 32 | 83 | 0 | 0 | 0 | 0 | 0 | 0 | 177 | 0 | 27 | 648 | 0 | 0 | 0 | 0 |
| 16:00 | 0 | 0 | 133 | 285 | 0 | 35 | 107 | 0 | 0 | 0 | 1 | 0 | 1 | 147 | 1 | 13 | 723 | 0 | 0 | 0 | 0 |
| 17:00 | 0 | 0 | 144 | 260 | 0 | 27 | 90 | 0 | 0 | 0 | 0 | 0 | 0 | 147 | 0 | 12 | 680 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 2 | 938 | 1819 | 0 | 233 | 1047 | 2 | 0 | 1 | 3 | 1 | 1 | 1947 | 1 | 221 | 6216 | 0 | 0 | 0 | 0 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Passenger Vehicles

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 3 | 2 | 0 | 0 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 19 | 0 | 4 | 34 |
| 6:15 | 0 | 0 | 5 | 6 | 0 | 0 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 2 | 56 |
| 6:30 | 0 | 0 | 5 | 1 | 0 | 0 | 11 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 7 | 65 |
| 6:45 | 0 | 0 | 7 | 10 | 0 | 1 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 57 | 0 | 3 | 103 |
| 7:00 | 0 | 0 | 7 | 13 | 0 | 5 | 24 | 0 | 0 | 0 | 0 | 0 | 0 | 57 | 0 | 6 | 112 |
| 7:15 | 0 | 0 | 17 | 17 | 0 | 3 | 35 | 0 | 0 | 0 | 0 | 0 | 0 | 72 | 0 | 1 | 145 |
| 7:30 | 0 | 0 | 18 | 29 | 0 | 6 | 36 | 0 | 0 | 0 | 0 | 0 | 0 | 68 | 0 | 7 | 164 |
| 7:45 | 0 | 0 | 26 | 32 | 0 | 3 | 41 | 0 | 0 | 0 | 0 | 0 | 0 | 71 | 0 | 12 | 185 |
| 8:00 | 0 | 0 | 18 | 26 | 0 | 6 | 29 | 0 | 0 | 0 | 0 | 0 | 0 | 64 | 0 | 4 | 147 |
| 8:15 | 0 | 0 | 15 | 37 | 0 | 4 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 45 | 0 | 3 | 125 |
| 8:30 | 0 | 0 | 16 | 50 | 0 | 5 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 60 | 0 | 6 | 162 |
| 8:45 | 0 | 0 | 20 | 25 | 0 | 10 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 54 | 0 | 4 | 141 |
| 9:00 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 |
| 9:15 | 0 | 0 | 15 | 23 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 44 | 0 | 7 | 105 |
| 9:30 | 0 | 0 | 11 | 24 | 0 | 5 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 39 | 0 | 0 | 101 |
| 9:45 | 0 | 0 | 12 | 20 | 0 | 3 | 25 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 97 |
| 10:00 | 0 | 0 | 12 | 20 | 0 | 3 | 25 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 97 |
| 10:15 | 0 | 0 | 10 | 28 | 0 | 4 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 2 | 94 |
| 10:30 | 0 | 0 | 16 | 24 | 0 | 3 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 46 | 0 | 2 | 104 |
| 10:45 | 0 | 0 | 18 | 27 | 0 | 2 | 21 | 0 | 0 | 0 | 1 | 0 | 0 | 50 | 0 | 5 | 124 |
| 11:00 | 0 | 0 | 26 | 29 | 0 | 2 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 34 | 0 | 6 | 117 |
| 11:15 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 |
| 11:30 | 0 | 0 | 22 | 53 | 0 | 4 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 140 |
| 11:45 | 0 | 0 | 25 | 35 | 0 | 5 | 15 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 8 | 118 |
| 12:00 | 0 | 0 | 21 | 29 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 7 | 112 |
| 12:15 | 0 | 0 | 21 | 29 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 32 | 0 | 7 | 112 |
| 12:30 | 0 | 0 | 16 | 22 | 0 | 7 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 2 | 94 |
| 12:45 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 |
| 13:00 | 0 | 0 | 15 | 29 | 0 | 6 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 26 | 0 | 2 | 96 |
| 13:15 | 0 | 0 | 13 | 29 | 0 | 6 | 16 | 0 | 0 | 1 | 0 | 0 | 0 | 39 | 0 | 3 | 107 |
| 13:30 | 0 | 0 | 13 | 29 | 0 | 6 | 16 | 0 | 0 | 1 | 0 | 0 | 0 | 39 | 0 | 3 | 107 |
| 13:45 | 0 | 0 | 13 | 35 | 0 | 3 | 17 | 0 | 0 | 0 | 0 | 0 | 0 | 22 | 0 | 2 | 92 |
| 14:00 | 0 | 0 | 19 | 42 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 116 |
| 14:15 | 0 | 0 | 19 | 41 | 0 | 4 | 18 | 0 | 0 | 0 | 0 | 0 | 0 | 31 | 0 | 5 | 118 |
| 14:30 | 0 | 0 | 13 | 38 | 0 | 7 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 0 | 5 | 111 |
| 14:45 | 0 | 0 | 16 | 35 | 0 | 1 | 28 | 0 | 0 | 0 | 0 | 0 | 0 | 40 | 0 | 2 | 122 |
| 15:00 | 0 | 0 | 17 | 49 | 0 | 9 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 132 |
| 15:15 | 0 | 0 | 29 | 55 | 0 | 6 | 22 | 0 | 0 | 0 | 0 | 0 | 0 | 50 | 0 | 8 | 170 |
| 15:30 | 0 | 0 | 29 | 65 | 0 | 7 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 59 | 0 | 8 | 184 |
| 15:45 | 0 | 0 | 29 | 49 | 0 | 8 | 24 | 0 | 0 | 0 | 0 | 0 | 0 | 36 | 0 | 5 | 151 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Passenger Vehicles

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 16:00 | 0 | 0 | 31 | 81 | 0 | 17 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 43 | 0 | 3 | 200 |
| 16:15 | 0 | 0 | 44 | 61 | 0 | 6 | 32 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 0 | 6 | 179 |
| 16:30 | 0 | 0 | 33 | 76 | 0 | 7 | 26 | 0 | 0 | 0 | 1 | 0 | 1 | 33 | 0 | 1 | 178 |
| 16:45 | 0 | 0 | 25 | 66 | 0 | 5 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 35 | 1 | 3 | 156 |
| 17:00 | 0 | 0 | 36 | 65 | 0 | 6 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 4 | 160 |
| 17:15 | 0 | 0 | 31 | 75 | 0 | 7 | 39 | 0 | 0 | 0 | 0 | 0 | 0 | 43 | 0 | 1 | 196 |
| 17:30 | 0 | 0 | 47 | 69 | 0 | 8 | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 37 | 0 | 6 | 183 |
| 17:45 | 0 | 0 | 30 | 50 | 0 | 6 | 15 | 0 | 0 | 0 | 0 | 0 | 0 | 38 | 0 | 1 | 140 |
| Count Total | 0 | 0 | 936 | 1755 | 0 | 240 | 1019 | 2 | 0 | 2 | 2 | 0 | 1 | 1923 | 1 | 212 | 6093 |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 20 | 19 | 0 | 1 | 56 | 0 | 0 | 0 | 0 | 0 | 0 | 146 | 0 | 16 | 258 |
| 7:00 | 0 | 0 | 68 | 91 | 0 | 17 | 136 | 0 | 0 | 0 | 0 | 0 | 0 | 268 | 0 | 26 | 606 |
| 8:00 | 0 | 0 | 69 | 138 | 0 | 25 | 103 | 0 | 0 | 0 | 0 | 0 | 0 | 223 | 0 | 17 | 575 |
| 9:00 | 0 | 0 | 53 | 90 | 0 | 14 | 73 | 1 | 0 | 0 | 0 | 0 | 0 | 157 | 0 | 20 | 408 |
| 10:00 | 0 | 0 | 56 | 99 | 0 | 12 | 72 | 1 | 0 | 0 | 1 | 0 | 0 | 163 | 0 | 15 | 419 |
| 11:00 | 0 | 0 | 95 | 170 | 0 | 15 | 91 | 0 | 0 | 0 | 0 | 0 | 0 | 122 | 0 | 22 | 515 |
| 12:00 | 0 | 0 | 73 | 109 | 0 | 27 | 67 | 0 | 0 | 0 | 0 | 0 | 0 | 120 | 0 | 18 | 414 |
| 13:00 | 0 | 0 | 54 | 122 | 0 | 21 | 67 | 0 | 0 | 2 | 0 | 0 | 0 | 126 | 0 | 10 | 402 |
| 14:00 | 0 | 0 | 67 | 156 | 0 | 16 | 77 | 0 | 0 | 0 | 0 | 0 | 0 | 135 | 0 | 16 | 467 |
| 15:00 | 0 | 0 | 104 | 218 | 0 | 30 | 83 | 0 | 0 | 0 | 0 | 0 | 0 | 175 | 0 | 27 | 637 |
| 16:00 | 0 | 0 | 133 | 284 | 0 | 35 | 104 | 0 | 0 | 0 | 1 | 0 | 1 | 141 | 1 | 13 | 713 |
| 17:00 | 0 | 0 | 144 | 259 | 0 | 27 | 90 | 0 | 0 | 0 | 0 | 0 | 0 | 147 | 0 | 12 | 679 |
| Count Total | 0 | 0 | 936 | 1755 | 0 | 240 | 1019 | 2 | 0 | 2 | 2 | 0 | 1 | 1923 | 1 | 212 | 6093 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Trucks Less Than 40' Long

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| | 6:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | 0 | 0 |
| 6:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6:45 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 7:00 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 6 |
| 7:15 | 0 | 0 | 1 | 0 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 0 | 7 |
| 7:30 | 0 | 0 | 1 | 2 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 7:45 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 8:00 | 0 | 0 | 2 | 2 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 |
| 8:15 | 0 | 0 | 2 | 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 7 |
| 8:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 2 |
| 8:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9:45 | 0 | 0 | 0 | 3 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 10:00 | 0 | 0 | 0 | 3 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 10:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 10:30 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |
| 10:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 11:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 4 |
| 12:15 | 0 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 4 |
| 12:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:45 | 0 | 0 | 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |
| 14:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 14:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 14:30 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 14:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 15:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15:15 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 15:30 | 0 | 0 | 1 | 4 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 7 |
| 15:45 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Trucks Less Than 40' Long

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |
| 16:15 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 3 |
| 16:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 2 |
| 16:45 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 |
| 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:15 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 17:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 13 | 26 | 0 | 5 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 23 | 0 | 3 | 82 |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 7:00 | 0 | 0 | 2 | 4 | 0 | 2 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 7 | 0 | 0 | 18 |
| 8:00 | 0 | 0 | 4 | 4 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 15 |
| 9:00 | 0 | 0 | 0 | 3 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| 10:00 | 0 | 0 | 0 | 3 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 7 |
| 11:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 12:00 | 0 | 0 | 2 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 8 |
| 13:00 | 0 | 0 | 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |
| 14:00 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 0 | 4 |
| 15:00 | 0 | 0 | 2 | 5 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 10 |
| 16:00 | 0 | 0 | 0 | 1 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 9 |
| 17:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| Count Total | 0 | 0 | 13 | 26 | 0 | 5 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 23 | 0 | 3 | 82 |



MILAM RD / BURGESS RD
APR 16, 2024

www.sustainabletrafficsolutions.com

Trucks Greater Than 40' Long

| Interval Start Time | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|---------------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |

| Hour by Hour | Milam Road Northbound | | | Milam Road Southbound | | | Burgess Rpad Eastbound | | | Burgess Road Westbound | | | Total | | | | |
|--------------|-----------------------|------|------|-----------------------|--------|------|------------------------|-------|--------|------------------------|------|-------|-------|--------|------|------|-------|
| | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | U-Turn | Left | Thru | Right | | U-Turn | Left | Thru | Right |
| 6:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 8:00 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 9:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 10:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 14:00 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 15:00 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Count Total | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 4 |

Traffic Signal Warrant Volumes

| Time of Day | Year 2024 Volumes | | | | | | | | | | | | Year 2025 Volumes | | | | | | | | | | | | | |
|-------------|-------------------|------|-----|------------|------|----|-----------|------|----|-----------|------|----|-------------------|------|-----|------------|------|----|-----------|------|----|-----------|------|-----|---|----|
| | Northbound | | | Southbound | | | Eastbound | | | Westbound | | | Northbound | | | Southbound | | | Eastbound | | | Westbound | | | | |
| | LT | Thru | RT | LT | Thru | RT | LT | Thru | RT | LT | Thru | RT | LT | Thru | RT | LT | Thru | RT | LT | Thru | RT | LT | Thru | RT | | |
| 6:00 | 0 | 21 | 19 | 1 | 56 | 0 | 0 | 0 | 0 | 146 | 0 | 16 | 0 | 33 | 30 | 2 | 125 | 0 | 0 | 0 | 0 | 0 | 0 | 453 | 0 | 50 |
| 7:00 | 0 | 70 | 95 | 19 | 139 | 0 | 0 | 0 | 0 | 275 | 0 | 26 | 0 | 110 | 149 | 42 | 310 | 0 | 0 | 0 | 0 | 0 | 0 | 854 | 0 | 81 |
| 8:00 | 0 | 69 | 168 | 20 | 103 | 0 | 0 | 0 | 0 | 235 | 0 | 19 | 0 | 108 | 263 | 45 | 230 | 0 | 0 | 0 | 0 | 0 | 0 | 730 | 0 | 59 |
| 9:00 | 0 | 55 | 93 | 10 | 72 | 1 | 0 | 0 | 0 | 165 | 0 | 23 | 0 | 86 | 146 | 22 | 160 | 1 | 0 | 0 | 0 | 0 | 0 | 512 | 0 | 71 |
| 10:00 | 0 | 57 | 101 | 12 | 82 | 1 | 0 | 1 | 1 | 155 | 0 | 16 | 0 | 89 | 158 | 27 | 183 | 1 | 0 | 1 | 1 | 0 | 0 | 481 | 0 | 50 |
| 11:00 | 0 | 78 | 164 | 15 | 95 | 0 | 0 | 1 | 0 | 137 | 0 | 17 | 0 | 122 | 257 | 33 | 212 | 0 | 0 | 1 | 0 | 0 | 0 | 425 | 0 | 53 |
| 12:00 | 0 | 81 | 125 | 23 | 71 | 0 | 0 | 0 | 0 | 110 | 0 | 26 | 0 | 127 | 196 | 51 | 158 | 0 | 0 | 0 | 0 | 0 | 0 | 342 | 0 | 81 |
| 13:00 | 0 | 56 | 130 | 22 | 72 | 0 | 1 | 0 | 0 | 115 | 0 | 10 | 0 | 88 | 204 | 49 | 160 | 0 | 1 | 0 | 0 | 0 | 0 | 357 | 0 | 31 |
| 14:00 | 0 | 68 | 156 | 17 | 77 | 0 | 0 | 0 | 0 | 138 | 0 | 16 | 0 | 106 | 244 | 38 | 172 | 0 | 0 | 0 | 0 | 0 | 0 | 428 | 0 | 50 |
| 15:00 | 0 | 106 | 223 | 32 | 83 | 0 | 0 | 0 | 0 | 177 | 0 | 27 | 0 | 166 | 349 | 71 | 185 | 0 | 0 | 0 | 0 | 0 | 0 | 550 | 0 | 84 |
| 16:00 | 0 | 133 | 285 | 35 | 107 | 0 | 0 | 1 | 0 | 147 | 1 | 13 | 0 | 208 | 446 | 78 | 238 | 0 | 0 | 1 | 0 | 0 | 0 | 456 | 1 | 40 |
| 17:00 | 0 | 144 | 260 | 27 | 90 | 0 | 0 | 0 | 0 | 147 | 0 | 12 | 0 | 226 | 407 | 60 | 201 | 0 | 0 | 0 | 0 | 0 | 0 | 456 | 0 | 37 |

Appendix F

Roadway Improvement Cost Estimates



IMPROVEMENTS ON BURGESS ROAD AT THE SCHOOL ACCESS

June 12, 2024

| Item No. | Work Activity | Quantity | Unit | Unit Cost | Total Cost |
|----------|---|----------|------|-------------|------------------|
| 1 | Unclassified Excavation | 4,623 | CY | \$3.25 | \$15,023 |
| 2 | Subgrade Preparation for Asphalt Pavement | 2,521 | SY | \$1.95 | \$4,917 |
| 3 | Asphalt Paving 6" Asphalt / 8" Class 5 Aggregate Base | 2,521 | SY | \$52.60 | \$132,624 |
| 4 | Latex Paint Pavement Markings | 1 | LS | \$2,000.00 | \$2,000 |
| 5 | Erosion Control | 1 | LS | \$10,000.00 | \$10,000 |
| 6 | Mobilization | 1 | LS | \$16,460.00 | \$16,460 |
| 7 | Work Zone Traffic Control | 1 | LS | \$16,460.00 | \$16,460 |
| 8 | Design and Construction Surveying | 1 | LS | \$50,000.00 | \$50,000 |
| 9 | Construction Administration | 1 | LS | \$16,460.00 | \$16,460 |
| | Subtotal | | | | \$263,900 |
| | 25% Contingency | | | | \$66,000 |
| | Total | | | | \$329,900 |

Note. The cost estimate does not include costs for utility relocation and right-of-way acquisition.



IMPROVEMENTS ON THE SOUTH LEG OF MILAM ROAD

June 12, 2024

| Item No. | Work Activity | Quantity | Unit | Unit Cost | Total Cost |
|----------|---|----------|------|-------------|------------------|
| 1 | Unclassified Excavation | 2,187 | CY | \$3.25 | \$7,106 |
| 2 | Subgrade Preparation for Asphalt Pavement | 1,193 | SY | \$1.95 | \$2,326 |
| 3 | Asphalt Paving 6" Asphalt / 8" Class 5 Aggregate Base | 1,193 | SY | \$52.60 | \$62,735 |
| 4 | Latex Paint Pavement Markings | 1 | LS | \$2,000.00 | \$2,000 |
| 5 | Erosion Control | 1 | LS | \$10,000.00 | \$10,000 |
| 6 | Mobilization | 1 | LS | \$8,420.00 | \$8,420 |
| 7 | Work Zone Traffic Control | 1 | LS | \$8,420.00 | \$8,420 |
| 8 | Design and Construction Surveying | 1 | LS | \$50,000.00 | \$50,000 |
| 9 | Construction Administration | 1 | LS | \$8,420.00 | \$8,420 |
| | Subtotal | | | | \$159,400 |
| | 25% Contingency | | | | \$39,900 |
| | Total | | | | \$199,300 |

Note. The cost estimate does not include costs for utility relocation and right-of-way acquisition.



IMPROVEMENTS ON THE NORTH LEG OF MILAM ROAD

June 12, 2024

| Item No. | Work Activity | Quantity | Unit | Unit Cost | Total Cost |
|----------|---|----------|------|-------------|------------------|
| 1 | Unclassified Excavation | 2,780 | CY | \$3.25 | \$9,035 |
| 2 | Subgrade Preparation for Asphalt Pavement | 1,516 | SY | \$1.95 | \$2,957 |
| 3 | Asphalt Paving 6" Asphalt / 8" Class 5 Aggregate Base | 1,516 | SY | \$52.60 | \$79,760 |
| 4 | Latex Paint Pavement Markings | 1 | LS | \$2,000.00 | \$2,000 |
| 5 | Erosion Control | 1 | LS | \$10,000.00 | \$10,000 |
| 6 | Mobilization | 1 | LS | \$10,380.00 | \$10,380 |
| 7 | Work Zone Traffic Control | 1 | LS | \$10,380.00 | \$10,380 |
| 8 | Design and Construction Surveying | 1 | LS | \$50,000.00 | \$50,000 |
| 9 | Construction Administration | 1 | LS | \$10,380.00 | \$10,380 |
| | Subtotal | | | | \$184,900 |
| | 25% Contingency | | | | \$46,200 |
| | Total | | | | \$231,100 |

Note. The cost estimate does not include costs for utility relocation and right-of-way acquisition.



IMPROVEMENTS ON THE EAST LEG OF BURGESS ROAD

WESTBOUND LEFT TURN DECEL LANE

September 12, 2024

| Item No. | Work Activity | Quantity | Unit | Unit Cost | Total Cost |
|----------|---|----------|------|-------------|------------------|
| 1 | Unclassified Excavation | 2,501 | CY | \$3.25 | \$8,129 |
| 2 | Subgrade Preparation for Asphalt Pavement | 1,364 | SY | \$1.95 | \$2,660 |
| 3 | Asphalt Paving 6" Asphalt / 8" Class 5 Aggregate Base | 1,364 | SY | \$52.60 | \$71,761 |
| 4 | Latex Paint Pavement Markings | 1 | LS | \$2,000.00 | \$2,000 |
| 5 | Erosion Control | 1 | LS | \$10,000.00 | \$10,000 |
| 6 | Mobilization | 1 | LS | \$9,460.00 | \$9,460 |
| 7 | Work Zone Traffic Control | 1 | LS | \$9,460.00 | \$9,460 |
| 8 | Design and Construction Surveying | 1 | LS | \$25,000.00 | \$25,000 |
| 9 | Construction Administration | 1 | LS | \$9,460.00 | \$9,460 |
| | Subtotal | | | | \$147,900 |
| | 25% Contingency | | | | \$37,000 |
| | Total | | | | \$184,900 |

Note. The cost estimate does not include costs for utility relocation and right-of-way acquisition.



IMPROVEMENTS ON THE EAST LEG OF BURGESS ROAD
NORTHBOUND TO EASTBOUND RIGHT TURN ACCEL LANE
 September 12, 2024

| Item No. | Work Activity | Quantity | Unit | Unit Cost | Total Cost |
|----------|---|----------|------|-------------|------------------|
| 1 | Unclassified Excavation | 2,851 | CY | \$3.25 | \$9,265 |
| 2 | Subgrade Preparation for Asphalt Pavement | 1,555 | SY | \$1.95 | \$3,032 |
| 3 | Asphalt Paving 6" Asphalt / 8" Class 5 Aggregate Base | 1,555 | SY | \$52.60 | \$81,787 |
| 4 | Latex Paint Pavement Markings | 1 | LS | \$2,000.00 | \$2,000 |
| 5 | Erosion Control | 1 | LS | \$10,000.00 | \$10,000 |
| 6 | Mobilization | 1 | LS | \$10,610.00 | \$10,610 |
| 7 | Work Zone Traffic Control | 1 | LS | \$10,610.00 | \$10,610 |
| 8 | Design and Construction Surveying | 1 | LS | \$25,000.00 | \$25,000 |
| 9 | Construction Administration | 1 | LS | \$10,610.00 | \$10,610 |
| | Subtotal | | | | \$162,900 |
| | 25% Contingency | | | | \$40,700 |
| | Total | | | | \$203,600 |

Note. The cost estimate does not include costs for utility relocation and right-of-way acquisition.