

PLAN NOTES

1. PARKING LOT LIGHTING IS TO BE DESIGNED AS "FULL CUT-OFF".
2. THE CONTRACTOR SHALL NOT PURPOSEFULLY PROCEED WITH ANY CONSTRUCTION PER PLANS PROVIDED WHEN OBSTRUCTIONS AND / OR DIFFERENCES EXIST THAT WERE NOT CONSIDERED AND REVIEWED OR APPROVED. CONTRACTOR SHALL NOTIFY OWNER OR OWNER'S REPRESENTATIVE AND EL PASO COUNTY IF SITUATION ARISES AND REVISIONS ARE NECESSARY.
3. THE CONTRACTOR SHALL PREVENT SEDIMENT, DEBRIS AND OTHER POLLUTANTS FROM ENTERING ANY STORM WATER SEWER SYSTEM OR, ADJACENT WATER WAYS, ETC., DURING THE DEMOLITION OR CONSTRUCTION OPERATIONS THAT ARE PART OF THIS PROJECT. THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THE EXPENSE OF CORRECTION OF ANY ADVERSE IMPACTS TO THE STORM WATER SEWER SYSTEM OR ADJACENT WATER WAYS, WETLANDS ETC., RESULTING FROM THE WORK DONE AS PART OF THIS PROJECT/CONTRACT.
4. THE CONTRACTOR SHALL BE RESPONSIBLE PRIOR TO BIDDING AND CONSTRUCTION, OF BECOMING AWARE OF ALL EXISTING AND PROPOSED UTILITIES, PIPES, STRUCTURES, ETC. CALL UNCC THREE DAYS BEFORE SCHEDULED WORK AT 811 OR 1-922-1987.
5. ANY MONUMENT SIGNAGE TO BE APPROVED THROUGH SEPARATE SIGN PERMIT
6. THE PARTIES RESPONSIBLE FOR THIS PLAN HAVE FAMILIARIZED THEMSELVES WITH ALL CURRENT ACCESSIBILITY CRITERIA AND SPECIFICATIONS AND THE PROPOSED PLAN REFLECTS ALL SITE ELEMENTS REQUIRED BY THE APPLICABLE ADA DESIGN STANDARDS AND GUIDELINES AS PUBLISHED BY THE UNITED STATES DEPARTMENT OF JUSTICE. APPROVAL OF THIS PLAN BY EL PASO COUNTY DOES NOT ASSURE COMPLIANCE WITH THE ADA OR ANY REGULATIONS OR GUIDELINES ENACTED OR PROMULGATED UNDER OR WITH RESPECT TO SUCH LAWS.

PROPERTY TAX SCHEDULE #:
6205000019

SITE DATA:


EXISTING ZONING: RR-5
 PROPOSED ZONING: RR-5
 ADJACENT ZONING: S=RR-5, SFD; W=RR-5, RESIDENTIAL; E=RR-5, CHURCH; N=RR-5, SFD
 ADJACENT USES: CHURCH, RESIDENTIAL
 SITE SF & ACREAGE: 392,040 SF / 9.0 ACRES
 REQUIRED SETBACKS:
 FRONT: 25'
 SIDE: 25'
 REAR: 25'

CROSSROADS CHAPEL - AMENDMENT
COLORADO SPRINGS, CO
SITE PLAN


PROJ. NO.:	
DATE:	08.20.25
SCALE:	See Sheet
DRAWN:	NAM
CHKD BY:	NAM
SHEET	810

REVISIONS:
Amendment Area 9.10.25

SITE PLAN PLAN
SCALE: 1" = 20'

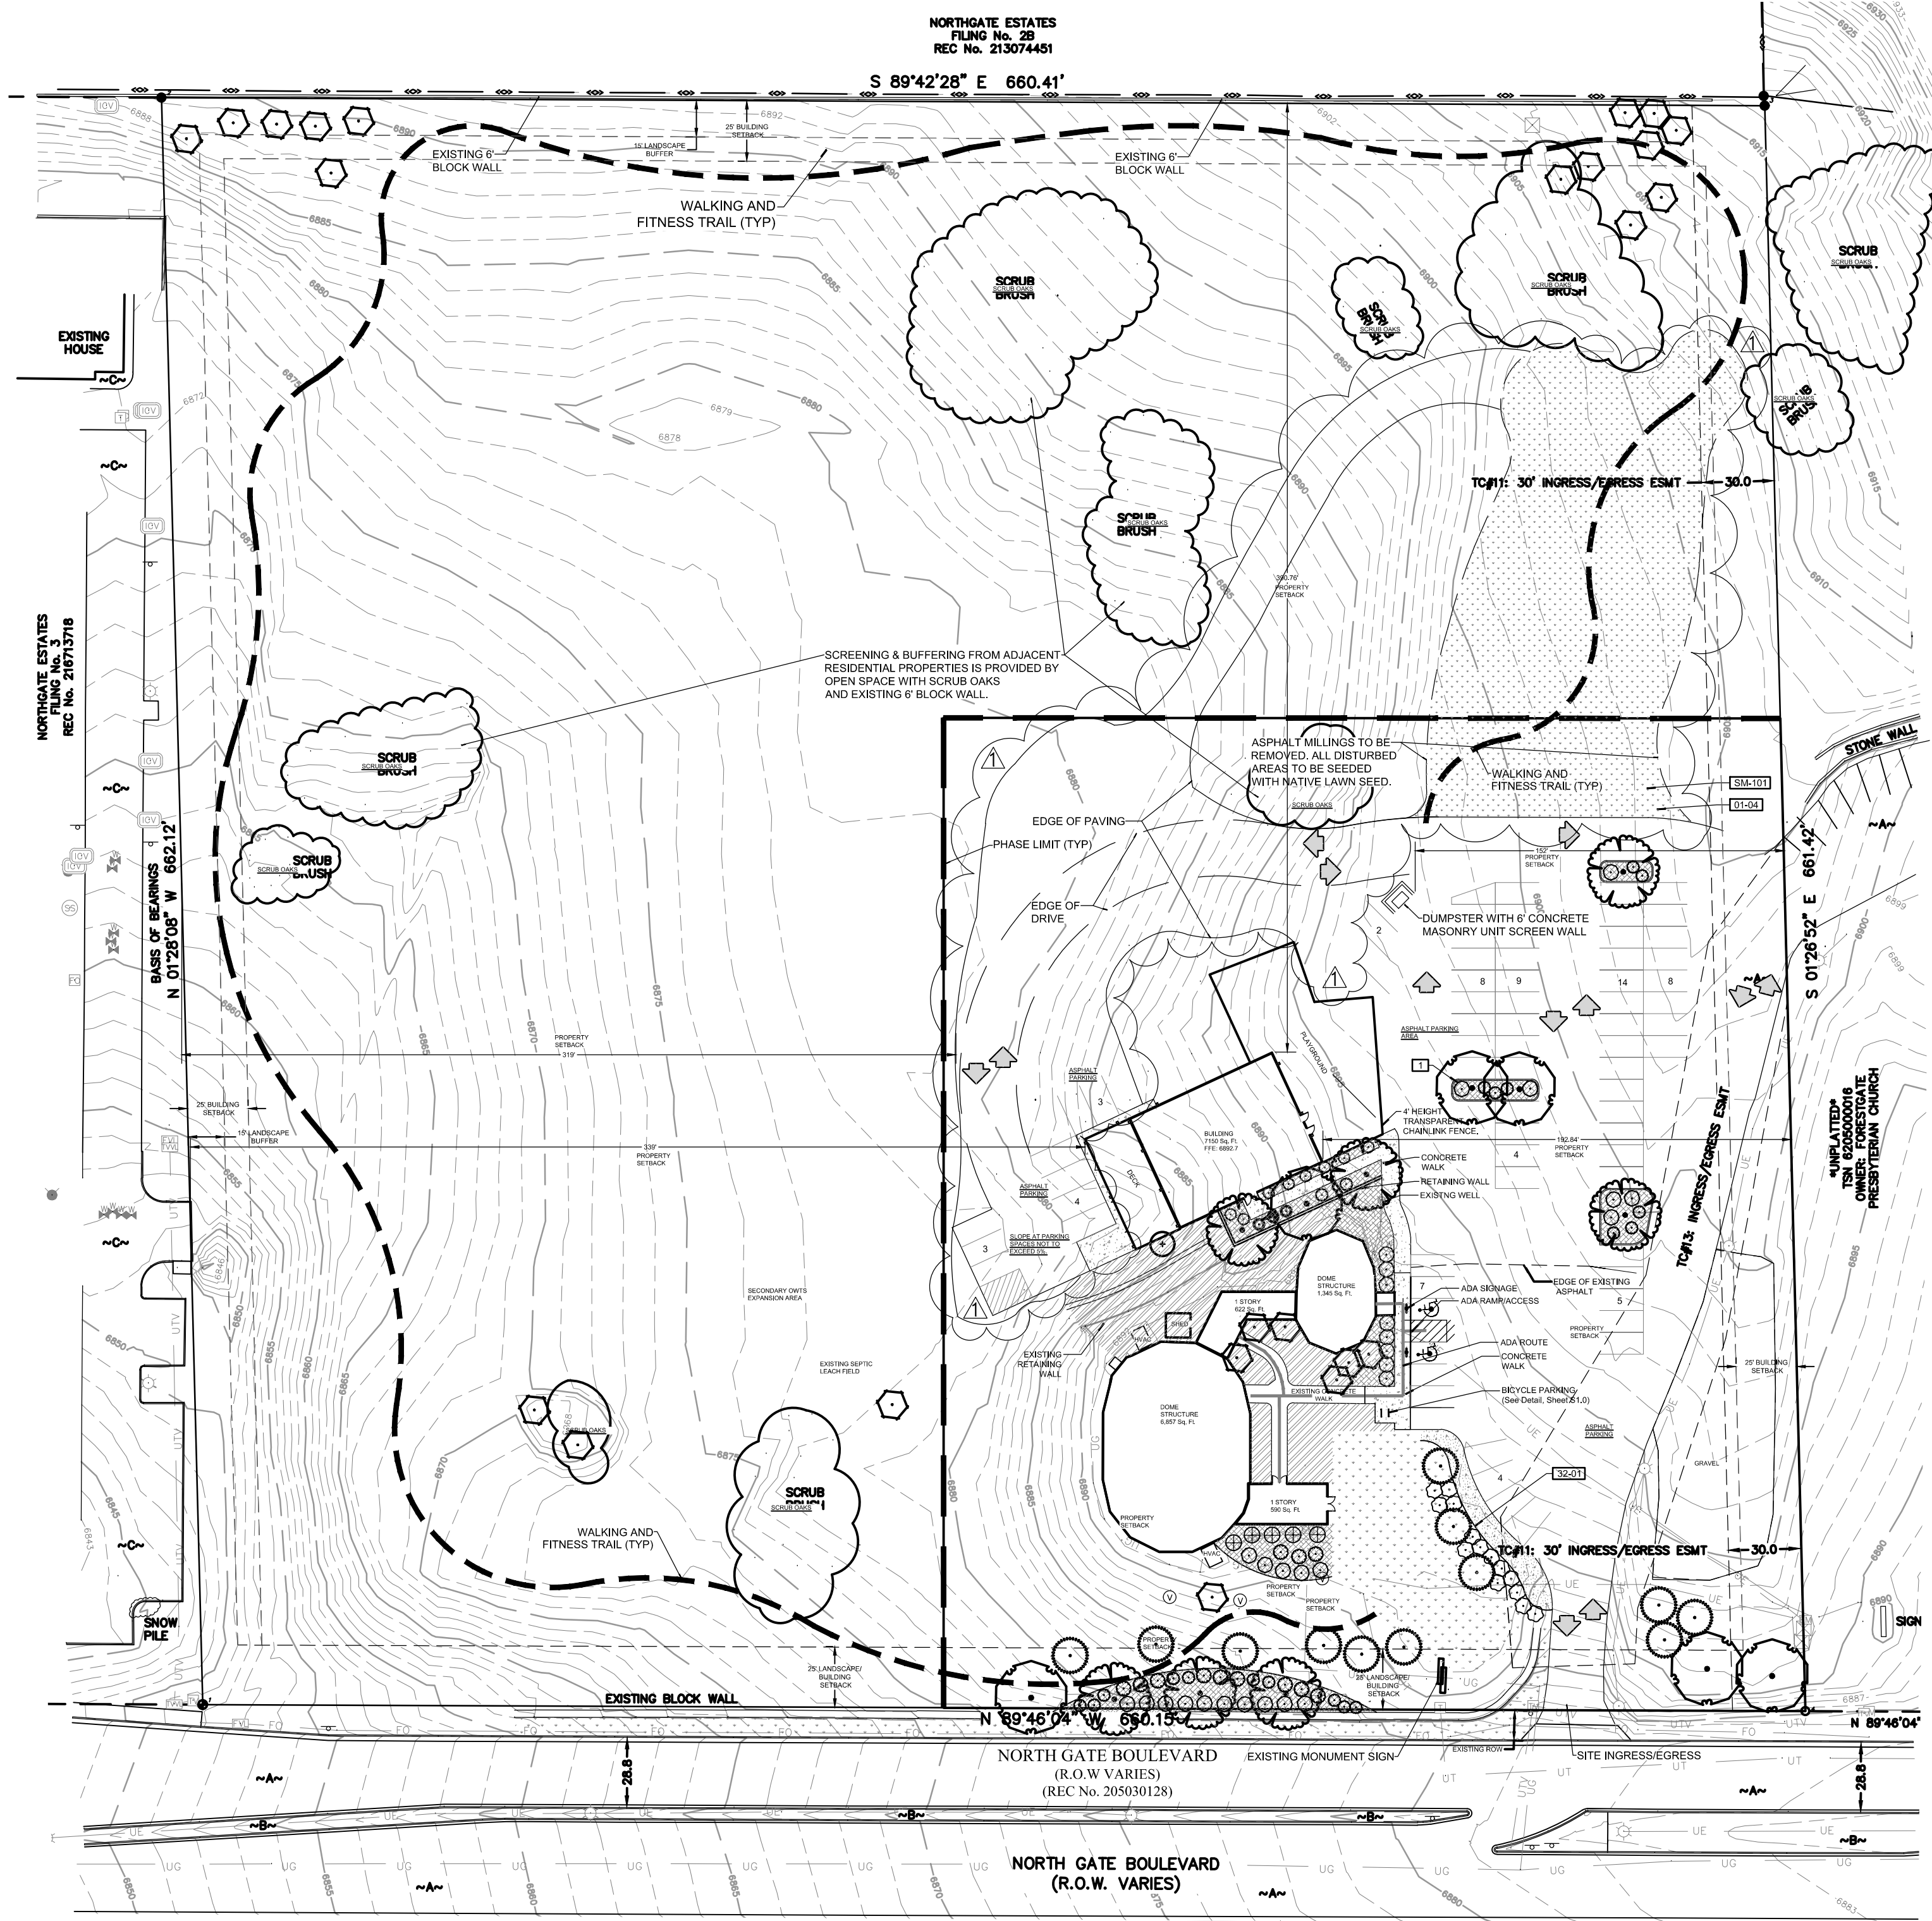

LANDSCAPE PLAN
SCALE: 1" = 50'

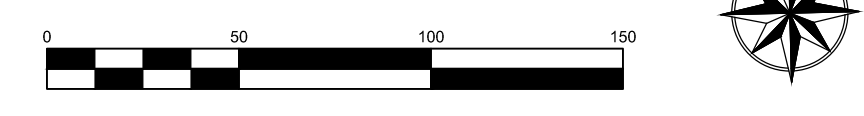

PLANT SCHEDULE

SYMBOL	CODE	QTY	BOTANICAL NAME	COMMON NAME	SIZE	CONTAINER
TREES						
	CO	7	Celtis occidentalis	Common Hackberry	B & B	1.5' Cal
	GTS	6	Gleditsia triacanthos inermis 'Shademaster' TM	Shademaster Locust	B & B	1.5' Cal
	PE	12	Pinus edulis	Pinon Pine	6' B&B	
	EX-REM	1	REMOVE AS INDICATED	EXISTING TREE TO BE REMOVED	EX	
	EX-RET	24	TO REMAIN- Protect during construction	EXISTING TREE TO REMAIN	EX	
SHRUBS						
	AC	29	Arctostaphylos x coloradoensis 'Chieftain'	Manzanita	5 gal	
	CIT	3	Cercocarpus intricatus	Little Leaf Mountain Mahogany	5 gal	
	CMF	5	Chamaebatia millefolium 'Fernbush'	Fernbush	5 gal	
	EN	12	Ericameria nauseosa	Rubber Rabbitbrush	5 gal	
	FA	20	Fallugia paradoxa 12356D	Apache Plume	5 gal	
	POD	14	Physocarpus opulifolius 'Diablo'	Diablo Ninebark	5 gal	
GRASSES						
	SW	8	Sporobolus wrightii	Big Sacaton	1 gal	
GROUND COVERS						
	EXLR	5,437 sf	EX LANDSCAPE - SHRUB BED ADJUST FOR NEW LAYOUT. REPLACE ANY DEAD/DAMAGED MATERIALS AND PROTECT DURING CONSTRUCTION.	TO REMAIN	EX	
	NLS	27,241 sf	NATIVE LAWN SEED MIX 2-3 LBS PER 1000 SQUARE FEET. TEMPORARY IRRIGATION	PAWNEE BUTTES SEED CO NATIVE LAWN MIX	seed	
MULCHES						
	RM	791 sf	ROCK MULCH PER OWNER APPROVAL. PLACE TO A UNIFORM DEPTH OF 3" OVER PERMEABLE WEED BARRIER FABRIC.	RIVER ROCK 1"-2"	mulch	
	WM	5,158 sf	SHREDDED CEDAR MULCH GORILLA HAIR OR SHREDDED REDWOOD MULCH. NO WEED BARRIER UNDER WOOD MULCH AREAS	WOOD MULCH	mulch	

PLAN NOTES:

- NO SUBSTITUTIONS WITHOUT PREVIOUS APPROVAL OF LANDSCAPE ARCHITECT. UNAPPROVED DEVIATIONS FROM THIS PLAN WILL BE RECTIFIED AT CONTRACTORS EXPENSE.
- CONTRACTOR TO PROVIDE ANALYSIS OF ANY AMENDMENTS PROPOSED FOR PLANTING AREAS PRIOR TO INSTALLATION OF SUCH MATERIALS.
- NO FABRIC UNDER WOOD MULCH IN ANY AREAS. ALL PLANTS IN ROCK MULCH AREAS TO RECEIVE SHREDDED CEDAR MULCH RINGS EQUAL TO THE ROOTBALL OF THE PLANT. MASSING SHALL HAVE CONTINUOUS SHREDDED MULCH BANDS. SEE DETAILS SHEET L2.0.
- DRILINE TO BE PLACED OVER WEED BARRIER FABRIC AND STAKED ON TOP OF WEED BARRIER.
- WEED BARRIER CUTOUTS FOR PLANTS IN ROCK AREAS SHALL ACCOUNT FOR MATURE SIZE OF PLANTS, AND EQUAL AT LEAST THE DIAMETER OF THE ROOTBALL. SEE DETAILS SHEET L2.0
- ALL EMITTERS PER IRRIGATION PLAN.
- ALL EMITTERS TO BE PLACED AT THE APPROPRIATE LOCATIONS. ALL EMITTERS TO USE MICRO TUBING, STAKES, AND BUG CAPS. SEE LANDSCAPE DETAILS SHEET FOR ADDITIONAL NOTES AND DETAILS.
- RETAIN 10% OF ALL PLANT TAGS PER SPECIES FOR DURATION OF WARRANTY PERIOD.

REFERENCE NOTES SCHEDULE

SYMBOL	DESCRIPTION	QTY
[1]	PLACE SHREDDED CEDAR MULCH AROUND BASE OF ALL PERENNIALS AND GRASSES IN LARGE COBBLE AREAS. MASS PERENNIALS TO RECEIVE LARGE RING AROUND ENTIRE GROUP (TYP). WOOD MULCH NOT REQUIRED AROUND BASE OF PLANTS LOCATED IN PEA GRAVEL.	
[2]	MINIMUM 3' ROOTBALL OFFSET FROM BUILDING, TYP.	
[3]	PLACE PLANTS TO PROVIDE MIN. 2' CLEARANCE FROM BACK OF CURB AT MATURE SPREAD.	
SYMBOL	DESCRIPTION	QTY
[01-04]	SEED ALL DISTURBED AREAS WITH NATIVE LAWN MIX UNLESS OTHERWISE NOTED.	
32 LANDSCAPE IMPROVEMENTS		
SYMBOL	DESCRIPTION	QTY
[32-01]	14 G ROLL TOP STEEL EDGING, STAKED 30" OC MAX.	776 LF
SYMBOL	DESCRIPTION	QTY
[SM-101]	ALL SEEDED AREAS TO BE AMENDED AND HYDROSEDED. PLACE EROSION CONTROL MAT ON ALL SLOPES EXCEEDING 4:1.	


SEED MAINTENANCE: MOW NATIVE LAWN MIX ABOUT 1/3 THE AMOUNT AS SODDED TURFGRASS OR AS NEEDED. MOW HAND PULL WEED OR SPOT WEED USING A BROADLEAF APPLICATION DURING FIRST 3 GROWING SEASONS.

Native Lawn Mix
(90%) Buffalograss
(10%) Blue Grama
Seed @ 2-3 lb / 1000 sf

DISTURBED AREAS TO BE RESEED WITH NATIVE LAWN MIX UNLESS OTHERWISE NOTED. RE: CIVIL PLANS


QTY FOR REFERENCE ONLY. VERIFY ALL COUNTS PER PLAN

REVISIONS:
Amendment Area 9.10.25

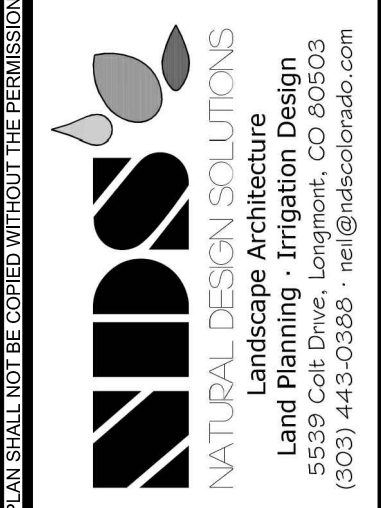

CROSSROADS CHAPEL - AMENDMENT
COLORADO SPRINGS, CO
LANDSCAPE PLAN

PROJ. NO.:
DATE: 08.20.25
SCALE: See Sheet
DRAWN: NAM
CHKD BY: NAM
SHEET L10

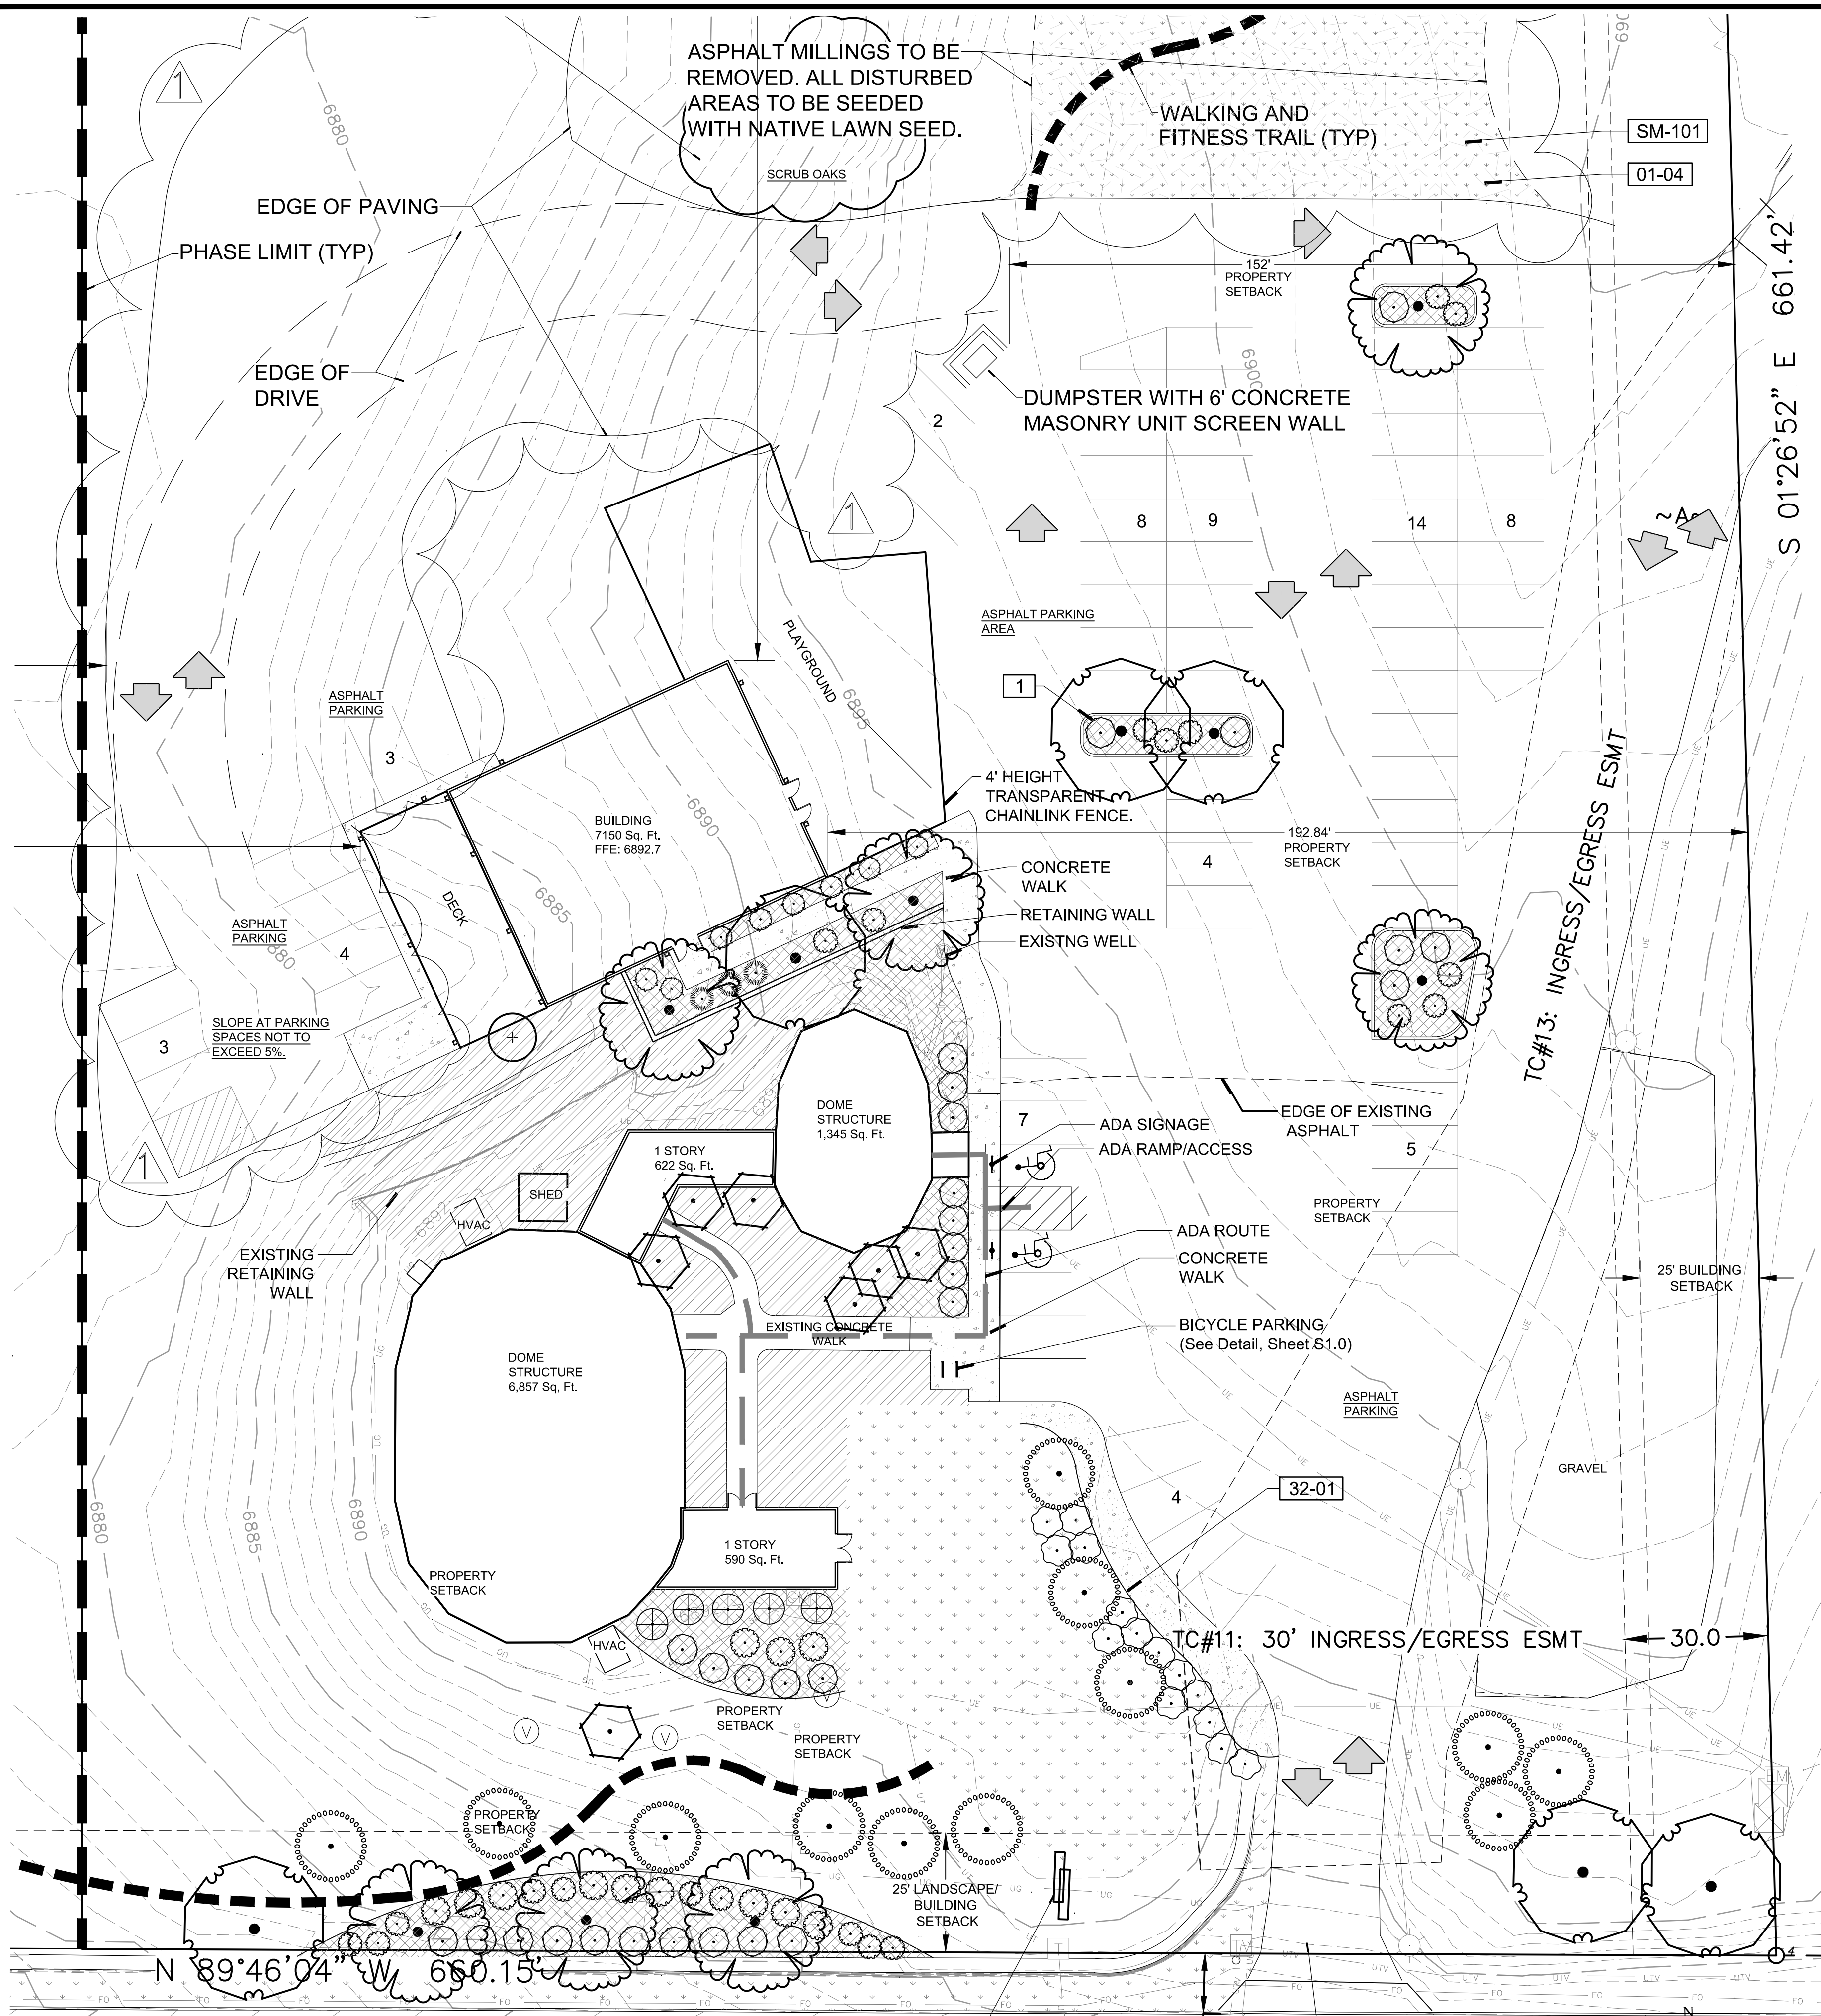

PLANT SCHEDULE

SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	SIZE	CONTAINER
TREES					
	CO	7	Celtis occidentalis / Common Hackberry	B & B	1.5" Cal
	GTS	6	Gleditsia triacanthos inermis 'Shademaster' TM / Shademaster Locust	B & B	1.5" Cal
	PE	12	Pinus edulis / Pinon Pine	6" B&B	
	EX-REM	1	REMOVE AS INDICATED / EXISTING TREE TO BE REMOVED	EX	
	EX-RET	24	TO REMAIN- Protect during construction / EXISTING TREE TO REMAIN	EX	
SHRUBS					
	AC	29	Arctostaphylos x coloradoensis 'Chieftain' / Manzanita	5 gal	
	CIT	3	Cercocarpus intricatus / Little Leaf Mountain Mahogany	5 gal	
	CMF	5	Chamaebatiaria millefolium 'Fernbush' / Fernbush	5 gal	
	EN	12	Ericameria nauseosa / Rubber Rabbitbrush	5 gal	
	FA	20	Fallugia paradoxa / Apache Plume	5 gal	
	POD	14	Physocarpus opulifolius 'Diablo' / Diablo Ninebark	5 gal	
GRASSES					
	SW	8	Sporobolus wrightii / Big Sacaton	1 gal	
GROUND COVERS					
	EXLR	5,437 sf	EX LANDSCAPE - SHRUB BED / TO REMAIN	EX	
	NLS	27,241 sf	NATIVE LAWN SEED MIX / PAWNEE BUTTES SEED CO NATIVE LAWN MIX	seed	
MULCHES					
	RM	791 sf	ROCK MULCH / RIVER ROCK 1"-2"	mulch	
	WM	5,158 sf	SHREDDED CEDAR MULCH / WOOD MULCH	mulch	

PLAN NOTES:

- NO SUBSTITUTIONS WITHOUT PREVIOUS APPROVAL OF LANDSCAPE ARCHITECT. UNAPPROVED DEVIATIONS FROM THIS PLAN WILL BE RECTIFIED AT CONTRACTORS EXPENSE.
- CONTRACTOR TO PROVIDE ANALYSIS OF ANY AMENDMENTS PROPOSED FOR PLANTING AREAS PRIOR TO INSTALLATION OF SUCH MATERIALS.
- NO FABRIC UNDER WOOD MULCH IN ANY AREAS. ALL PLANTS IN ROCK MULCH AREAS TO RECEIVE SHREDDED CEDAR MULCH RINGS EQUAL TO THE ROOTBALL OF THE PLANT. MASSING SHALL HAVE CONTINUOUS SHREDDED MULCH BANDS. SEE DETAILS SHEET L2.0.
- DRIPLINE TO BE PLACED OVER WEED BARRIER FABRIC AND STAKED ON TOP OF WEED BARRIER.
- WEED BARRIER CUTOUTS FOR PLANTS IN ROCK AREAS SHALL ACCOUNT FOR MATURE SIZE OF PLANTS, AND EQUAL AT LEAST THE DIAMETER OF THE ROOTBALL. SEE DETAILS SHEET L2.0
- ALL EMITTERS PER IRRIGATION PLAN.
- ALL EMITTERS TO BE PLACED AT THE APPROPRIATE LOCATIONS. ALL EMITTERS TO USE MICRO TUBING, STAKES, AND BUG CAPS.
- SEE LANDSCAPE DETAILS SHEET FOR ADDITIONAL NOTES AND DETAILS.
- RETAIN 10% OF ALL PLANT TAGS PER SPECIES FOR DURATION OF WARRANTY PERIOD.

REFERENCE NOTES SCHEDULE

SYMBOL	DESCRIPTION	QTY
[1]	PLACE SHREDDED CEDAR MULCH AROUND BASE OF ALL PERENNIALS AND GRASSES IN LARGE COBBLE AREAS. MASSING PERENNIALS TO RECEIVE LARGE RING AROUND ENTIRE GROUP (TYP). WOOD MULCH NOT REQUIRED AROUND BASE OF PLANTS LOCATED IN PEA GRAVEL.	
[2]	MINIMUM 3' ROOTBALL OFFSET FROM BUILDING, TYP.	
[3]	PLACE PLANTS TO PROVIDE MIN. 2' CLEARANCE FROM BACK OF CURB AT MATURE SPREAD.	
SYMBOL	DESCRIPTION	QTY
[01-04]	SEED ALL DISTURBED AREAS WITH NATIVE LAWN MIX UNLESS OTHERWISE NOTED.	
SYMBOL	DESCRIPTION	QTY
[32-01]	14 G ROLL TOP STEEL EDGING, STAKED 30" OC MAX.	776 LF
SYMBOL	DESCRIPTION	QTY
[SM-101]	ALL SEEDED AREAS TO BE AMENDED AND HYDROSEEDING. PLACE EROSION CONTROL MAT ON ALL SLOPES EXCEEDING 4:1.	

SEED MAINTENANCE: MOW NATIVE LAWN MIX ABOUT 1/2 THE AMOUNT AS SOODED TURFGRASS OR AS NEEDED. MOW HAND PULL WEED OR SPOT WEED USING A BROADLEAF APPLICATION DURING FIRST 3 GROWING SEASONS.

Native Lawn Mix
 (90%) Buffalograss
 (10%) Blue Grama
 Seed @ 2-3 lb / 1000 sf

DISTURBED AREAS TO BE RESEEDING WITH NATIVE LAWN MIX UNLESS OTHERWISE NOTED. RE: CIVIL PLANS

N 89°46'04" W 660.15'

LANDSCAPE PLAN ENLARGEMENT

SCALE: 1" = 20'



CROSSROADS CHAPEL - AMENDMENT
COLORADO SPRINGS, CO
LANDSCAPE PLAN

PROJ. NO.:
 DATE: 08.20.25
 SCALE: See Sheet
 DRAWN: NAM
 CHKD BY: NAM
 SHEET L11

GENERAL NOTES

(Note: All references to "Contractor" are specific to "Landscape Contractor" unless notified as "General or other type of Contractor")

- CONTRACTOR IS RESPONSIBLE FOR VERIFYING QUANTITIES OF MATERIALS NEEDED TO COMPLETE THIS PLAN IN THE FIELD. NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPANCIES BETWEEN THE DRAWINGS AND CONDITIONS IN THE FIELD. SUBSTITUTIONS OF PLANT MATERIAL ARE NOT ALLOWED WITHOUT APPROVAL FROM LANDSCAPE ARCHITECT GIVEN PRIOR TO INSTALLATION. GRAPHIC QTY'S, PREVAIL OVER WRITTEN QTY'S. PRIOR TO COMMENCEMENT OF WORK THE LANDSCAPE CONTRACTOR SHALL CONTACT OWNERS REPRESENTATIVE FOR SPECIFIC INSTRUCTIONS RELEVANT TO THE SEQUENCING AND SCOPE OF WORK.
- CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL LANDSCAPE SHOWN ON THIS PLAN. ANY DEFICIENCIES OR DEVIATIONS FROM THIS PLAN ARE TO BE APPROVED BY OWNER'S REPRESENTATIVE OR LANDSCAPE ARCHITECT. ANY CHANGES FROM THE APPROVED PLANS MAY REQUIRE APPROVAL FROM THE CITY OR COUNTY PLANNING DEPARTMENTS.

LANDSCAPE CONTRACTOR TO PROVIDE ALL LABOR AND MATERIALS NECESSARY TO FURNISH SCOPE OF WORK AS SHOWN PER PLAN.
- EXISTING TOPSOIL IS TO BE STOCKPILED AND USED TO ESTABLISH FINAL GRADES WITHIN LANDSCAPE AREAS. ALL STOCKPILED SOIL MUST BE CLEAR OF WEEDS, ROCKS AND DEBRIS BEFORE REUSE. ALL BERMED PLANTING BEDS TO BE CREATED WITH IMPORTED TOPSOIL.
- GENERAL CONTRACTOR TO RE-SPREAD STOCKPILED SOIL AND ESTABLISH PROPER GRADE CONDITIONS TO THE FOLLOWING SPECIFICATIONS:
A. 1" BELOW CURB FOR ALL SEEDED AREAS.
B. 2.5" BELOW CURB FOR ALL SODDED AREAS.
C. 4" BELOW CURB FOR ALL PLANTING, ROCK AND MULCH BEDS.
CONTRACTOR TO TILL PARKING LOT ISLANDS TO A DEPTH OF 30".
- AMEND ALL PLANTING BEDS WITH CLASS 1 COMPOST. APPLY AT RATE OF 3 CYDS. PER 1000 SQUARE FEET TO ALL PLANTING BEDS AND MANICURED LAWN AREAS, AND 2 CYDS. PER 1000 SQUARE FEET FOR SEEDED AREAS. TILL, MIXING THOROUGHLY, INTO THE UPPER 8" OF SOIL.
- FINE GRADE TO BE ESTABLISHED BY LANDSCAPE CONTRACTOR. FINE GRADE SHALL BE FREE OF ROCKS AND DEBRIS. FINE GRADE IN SEED AREAS SHALL BE FREE FROM ROCKS AND DEBRIS 1/2" AND GREATER. FINE GRADE IN SODDED AREAS SHALL BE FREE FROM ROCKS AND DEBRIS 1/2" AND GREATER. CONTRACTOR TO REPORT ANY POOR DRAINAGE CONDITIONS PRIOR TO CONSTRUCTION.
- CONTRACTOR IS TO PROVIDE VERIFICATION THAT ALL SOD IS OF THE SPECIES SHOWN ON THIS PLAN. NO SUBSTITUTIONS WILL BE ALLOWED. SOD TO BE LAID WITH TIGHT STAGGERED EDGES AND BE ROLLED AFTER INSTALLATION. SEEDED AREAS CANNOT BE SUBSTITUTED WITH SOD.
- MULCHS: ALL PLANTING BEDS THAT CALL FOR WOOD/ORGANIC MULCH TO RECEIVE 4" ORGANIC SHREDDED BARK MULCH. SHREDDED MULCH IS TO BE OF FIBROUS MATERIAL, NOT CHIPS OR CHUNKS. NO FABRIC IS TO BE PLACED UNDER WOOD/ORGANIC MULCH. TREES IN TURF AND NATIVE GRASS AREAS TO RECEIVE 4" DIAMETER OF WOOD MULCH, 3" DEPTH. SHRUBS AND GROUNDCOVERS IN NATIVE GRASS AREAS TO RECEIVE 3" DIAMETER OF WOOD MULCH, 3" DEEP. ALL MULCHED BEDS ARE TO BE SPRAYED WITH WATER AFTER INSTALLATION TO HELP MULCH TO MAT DOWN.

TREES IN COBBLE/ROCK MULCH TO RECEIVE 4" DIAMETER OF WOOD MULCH, 3" DEEP. SHRUBS AND GROUNDCOVERS IN COBBLE/ROCK MULCH AREAS TO RECEIVE 3" DIAMETER OF WOOD MULCH, 3" DEEP. NO FABRIC UNDERLAYMENT IN WOOD MULCH AREAS.

ALL PLANTING BEDS THAT CALL FOR COBBLE/ROCK MULCH TO RECEIVE MIN. 3" DEPTH OF MULCH USE PERMEABLE FABRIC UNDERLAYMENT FOR ALL COBBLE/AGGREGATE AREAS WITH SLOPES 3:1 AND LESS. USE QUICK RELEASE ORGANIC PRE-EMERGENT HERBICIDE FOR ALL MULCHED AND PERENNIAL PLANTING BEDS (AND FOR COBBLE/AGGREGATE AREAS WITH SLOPES EXCEEDING 3:1 GRADE.


- SEED MIX INSTALLATION: CONTRACTOR TO DRILL SEED WITH BRILLION TYPE APPLICATOR AND APPLY 'SOIL GUARD' BONDED FIBER MATRIX (BFM), WHERE INDICATED PER PLAN AND SCHEDULES. APPLY SEED IN TWO DIRECTIONS (PERPENDICULAR OF THE OTHER). ADD SOIL GUARD BFM FOR DRILL SEEDING WHERE NOTED PER PLAN AND ON ALL SLOPES 5:1 TO 3:1. FOR AREAS WITH 3:1 SLOPES OR GREATER CONTRACTOR TO USE SOIL GUARD APPLICATION ONLY (IN LIEU OF HYDROMULCH) CONTRACTOR TO SPOT SEED NON-GERMINATING AREAS (3) MONTHS AFTER INITIAL SEED APPLICATION. CONTRACTOR TO RE-SEED ALL BARE AREAS (6"x6") AND GREATER AFTER (6) MONTHS FROM SEED GERMINATION OR AT THE BEGINNING OF THE FOLLOWING GROWING SEASON. PRIOR TO THE 11-MONTH WARRANTY INSPECTION RE-APPLY SOIL GUARD AND SEED MIX TO ALL BARE AREAS (6"x6" OR GREATER) AND TO ALL BARE AREAS (4"x4" OR GREATER) ON ALL SLOPES 3:1 AND GREATER.
- REMOVED DEAD TWIGS AND BRANCHES FROM ALL NEW AND EXISTING PLANT MATERIAL IN A MANNER THAT DOES NOT CHANGE THE NATURAL HABIT OF THE PLANT MATERIAL. SCARES OF 1" OR MORE SHALL BE PAINTED WITH ORGANIC TREE PAINT. CENTRAL LEADERS SHALL NOT BE REMOVED AT ANY TIME. NEWLY PLANTED TREES WITHOUT CENTRAL LEADERS WILL BE REJECTED.
- CONTRACTOR TO APPLY FERTILIZER IN SPRING & LATE SEPTEMBER. WATER THOROUGHLY AFTER APPLICATION OF FERTILIZERS.

ALL SEEDED AND SODDED AREAS TO HAVE RECOMMEND FERTILIZER APPLICATIONS ADDED 2 TO 3 WEEKS AFTER SEEDLING EMERGENCE. AND ONCE IN MID TO LATE JUNE, IN EARLY TO MID AUGUST, AND ONCE IN LATE SEPTEMBER. SEEDED AND SODDED AREAS ARE ALSO TO RECEIVE .5 LB. OF ELEMENTAL SULFUR (OR EQUIVALENT MATERIAL) PER 1,000 S.F. APPLIED IN LATE SEPTEMBER. WATER THOROUGHLY AFTER APPLICATION OF FERTILIZERS.
- ALL PLANT MATERIALS AND UTILITIES ARE SHOWN AT AN APPROXIMATE LOCATIONS. THE CONTRACTOR MAY NEED TO ADJUST LOCATIONS OF PLANT MATERIAL TO ADHERE TO SPECIFIC ON-SITE CONDITIONS AND CODE REQUIREMENTS. ALL TREES AND SHRUBS TO BE PLACED AT 2' MINIMUM BACK OF CURB. CONTRACTOR TO CALL FOR UTILITY LOCATES BEFORE PLANTING (TYP.) 1-800-922-1987, OR CALL 811 BEFORE YOU DIG!
- STEEL EDGING TO BE USED TO SEPARATE ALL TURF AND/OR SEEDED AREAS FROM PLANTING BEDS. USE PERFORATED EDGING SEGMENTS TO OBTAIN POSITIVE DRAINAGE FOR ALL DRAINAGE SWALES OR AREAS OF STANDING WATER.
- CONTRACTOR TO PROVIDE COBBLE & UNDERLAYMENT FOR BUILDING DRAINS AND SWALES THROUGH LANDSCAPED AREAS.
- ALL REQUIRED LANDSCAPING TO BE INSTALLED PRIOR TO ISSUANCE OF THE CERTIFICATE OF OCCUPANCY.
- ALL NURSERY STOCK TO CONFORM TO THE AMERICAN STANDARD FOR NURSERY STOCK (ANSI z60.1) AND THE COLORADO NURSERY ACT.
- CONTRACTOR IS RESPONSIBLE FOR CONTACTING LANDSCAPE ARCHITECT FOR ALL REQUIRED INSPECTIONS. PROVIDE AT LEAST 48 HOURS NOTICE TO SCHEDULE AN INSPECTION. REQUIRED INSPECTIONS INCLUDE A LANDSCAPE LAYOUT AND PLANT MATERIAL VERIFICATION AND PLACEMENT INSPECTION, IRRIGATION MAIN LINE INSPECTION, LANDSCAPE AND IRRIGATION PUNCH LIST INSPECTION, AND A LANDSCAPE AND IRRIGATION FINAL INSPECTION.
- CONTRACTOR IS TO PROVIDE A ONE YEAR WARRANTY ON ALL PLANT MATERIAL, TURF, IRRIGATION COMPONENTS, AND WORKMANSHIP. REPLACEMENT PLANT MATERIALS SHALL BE OF THE SAME SPECIES AND SIZE AS THE DECAYED OR DEAD PLANT MATERIAL. WARRANTY IS VOID IF PLANT MATERIAL ARE UNDER OR OVER-WATERED/FERTILIZED, DAMAGED BY VANDALISM OR NEGLECTED BY OWNER AFTER FINAL MAINTENANCE PERIOD AND FINAL ACCEPTANCE IS PROVIDED.


REMOVE ALL TREE STAKING MATERIALS AT END OF WARRANTY, PRIOR TO FINAL ACCEPTANCE

NOTES:

- MARK THE NORTH SIDE OF TREE IN THE NURSERY, AND ROTATE TREE TO FACE NORTH AT THE SITE WHENEVER POSSIBLE.
- AT TIME OF PLANTING, DO NOT REMOVE OR CUT LEADER AND PRUNE ONLY DEAD OR BROKEN BRANCHES, CROSS OVER BRANCHES, AND WEAK OR NARROW CROTCHES. SOME INTERIOR TWIGS AND LATERAL BRANCHES MAY BE PRUNED. HOWEVER, DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN.
- STRUCTURAL PRUNING SHOULD NOT BEGIN UNTIL AFTER ESTABLISHMENT PERIOD, USUALLY TWO GROWING SEASONS.
- KEEP PLANTS MOIST AND SHADED UNTIL PLANTING.
- DO NOT FERTILIZE FOR AT LEAST ONE GROWING SEASON.
- AMENDED BACKFILL SHALL BE AS STATED ON THIS SHEET.
- WRAP TRUNK ON EXPOSED SITES AND SPECIES WITH THIN BARK. USE ELECTRICAL OR DUCT TAPE, NOT TWINE.
- COORDINATE WITH CITY FORESTRY FOR CURRENT INSECT AND DISEASE RECOMMENDATIONS PRIOR TO PLANTING.
- DEEP WATER ALL PLANTS AT TIME OF PLANTING.

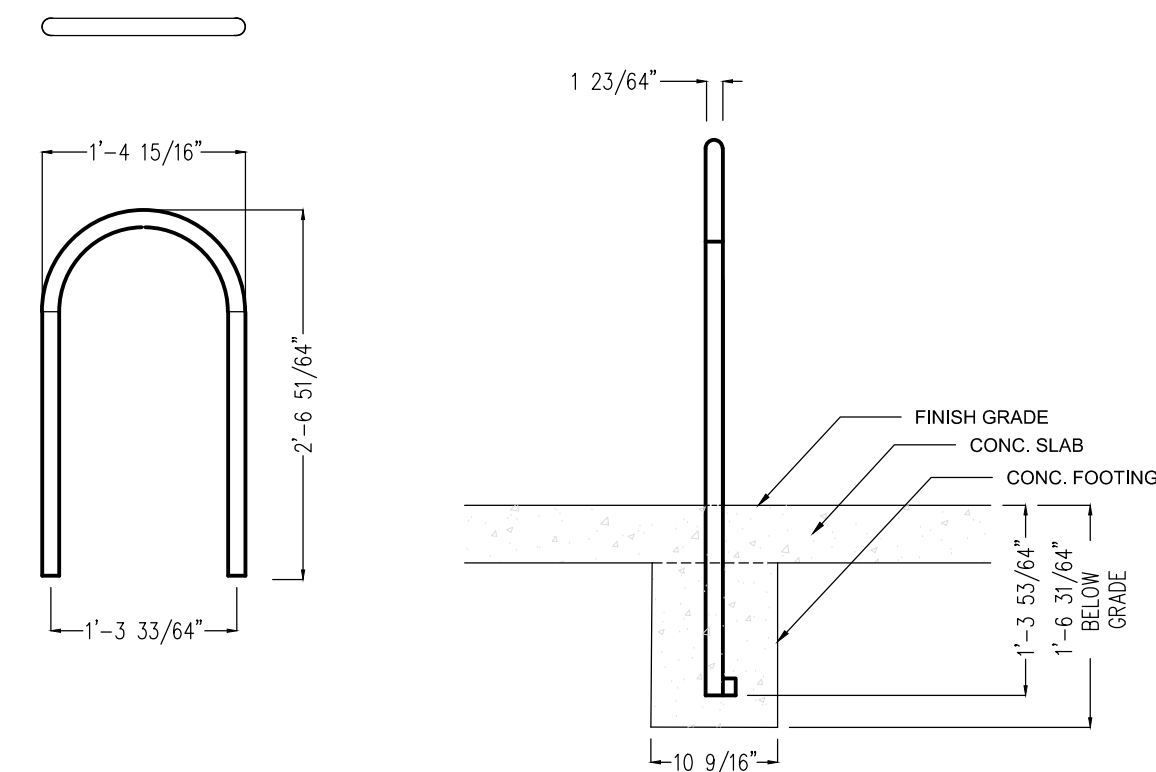

L2.0 MAGLIN 500 STEEL BIKE RACK DETAIL (MBR500-DB)
NOT TO SCALE

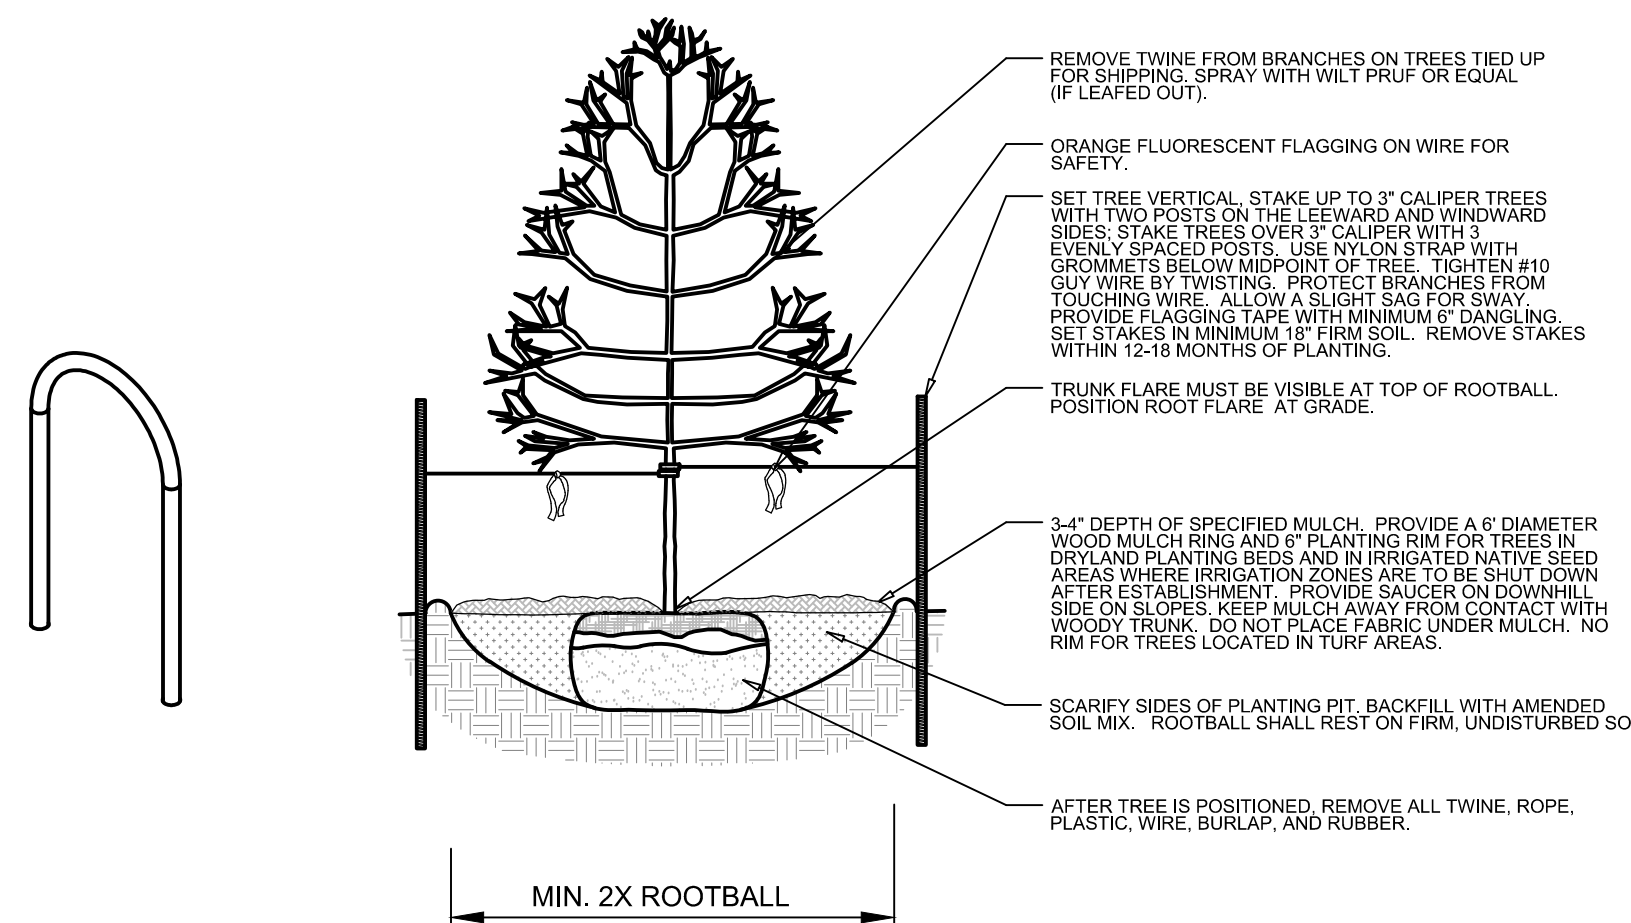

L2.0 DECIDUOUS TREE PLANTING DETAIL
SECTION

EXISTING TREE PROTECTION DIRECTIONS:

PROTECTIVE FENCING:

FOUR FOOT HEIGHT PROTECTIVE FENCING IS TO BE INSTALLED AROUND THE EXISTING TREES TO REMAIN PRIOR TO CONSTRUCTION ON THIS SITE. CONTRACTOR IS TO TAKE PRECAUTIONS TO ENSURE THAT EXISTING ROOTS AND LIMBS ARE NOT DAMAGED DURING EXCAVATION ADJACENT TO TREES. FENCING IS TO BE INSTALLED BELOW THE EDGE OF THE CANOPY OF THE EXISTING TREES TO REMAIN. FENCING IS TO REMAIN IN PLACE FOR THE DURATION OF CONSTRUCTION.


IF ROOT PRUNING IS NECESSARY FOR GRADING, EXCAVATING, OR INSTALLATION OF IRRIGATION SYSTEM, ALL ROOT PRUNING IS TO TAKE PLACE OUTSIDE OF THE PROTECTIVE FENCING AROUND EACH TREE. CONTRACTOR IS TO TRENCH 12" AWAY FROM PROTECTIVE FENCING. ANY ROOTS LARGER THAN 2" ARE TO BE SAW CUT. CONTRACTOR IS TO HAND DIG ANY TRENCHES AND SAW CUT ANY INTERFERING ROOTS INSIDE THE PROTECTIVE FENCE AREAS.

WATERING, MULCHING, AND FERTILIZATION:

PRIOR TO CONSTRUCTION CONTRACTOR IS TO PLACE A 4" DEPTH OF WOOD CHIPS OR MULCH INSIDE THE PROTECTIVE FENCING OF EXISTING TREES TO REMAIN. CONTRACTOR IS TO PROVIDE REGULAR DEEP WATERING TO ALL EXISTING TREES TO REMAIN THROUGHOUT CONSTRUCTION. DURING CONSTRUCTION A SLOW-RELEASE NITROGEN FERTILIZER IS TO BE APPLIED AROUND THE BASE OF EACH TREE AT A RATE OF 2 LBS. PER 1000 S.F. (USE DRIP LINE OF TREE TO CALCULATE SQUARE FOOTAGE).


L2.0 TREE PROTECTION DETAIL
NOT TO SCALE

MAINTENANCE: THE OWNER OF THIS PROPERTY AND ANY FUTURE OWNERS SHALL BE RESPONSIBLE FOR THE PROPER LANDSCAPE AND IRRIGATION MAINTENANCE OF THIS SITE AND ANY RIGHT OF WAY AREAS BETWEEN THE CURB AND PROPERTY LINES OF THIS SITE. MAINTENANCE OF THIS SITE INCLUDES, BUT IS NOT LIMITED TO, IRRIGATION INSPECTIONS AND ADJUSTMENTS, IRRIGATION SYSTEM SHUT DOWN AND START UP, IRRIGATION LEAK REPAIR, LANDSCAPE WEEDING, MOWING, SEEDING, FERTILIZATION, WOOD MULCH AND ROCK COVER REPLACEMENT, PRUNING, AND PLANT MATERIAL REPLACEMENT (INCLUDING ANNUAL BEDS). ALL MAINTENANCE SHOULD BE IN ACCORDANCE WITH STANDARDS SPECIFIED WITHIN THE "ALCC SPECIFICATIONS HANDBOOK" REVISED EDITION- 1996. OWNER SHOULD CONTACT LANDSCAPE CONTRACTOR OR LANDSCAPE ARCHITECT REGARDING ANY QUESTIONS RELATING TO THE LANDSCAPE OR IRRIGATION MAINTENANCE OF THIS SITE.

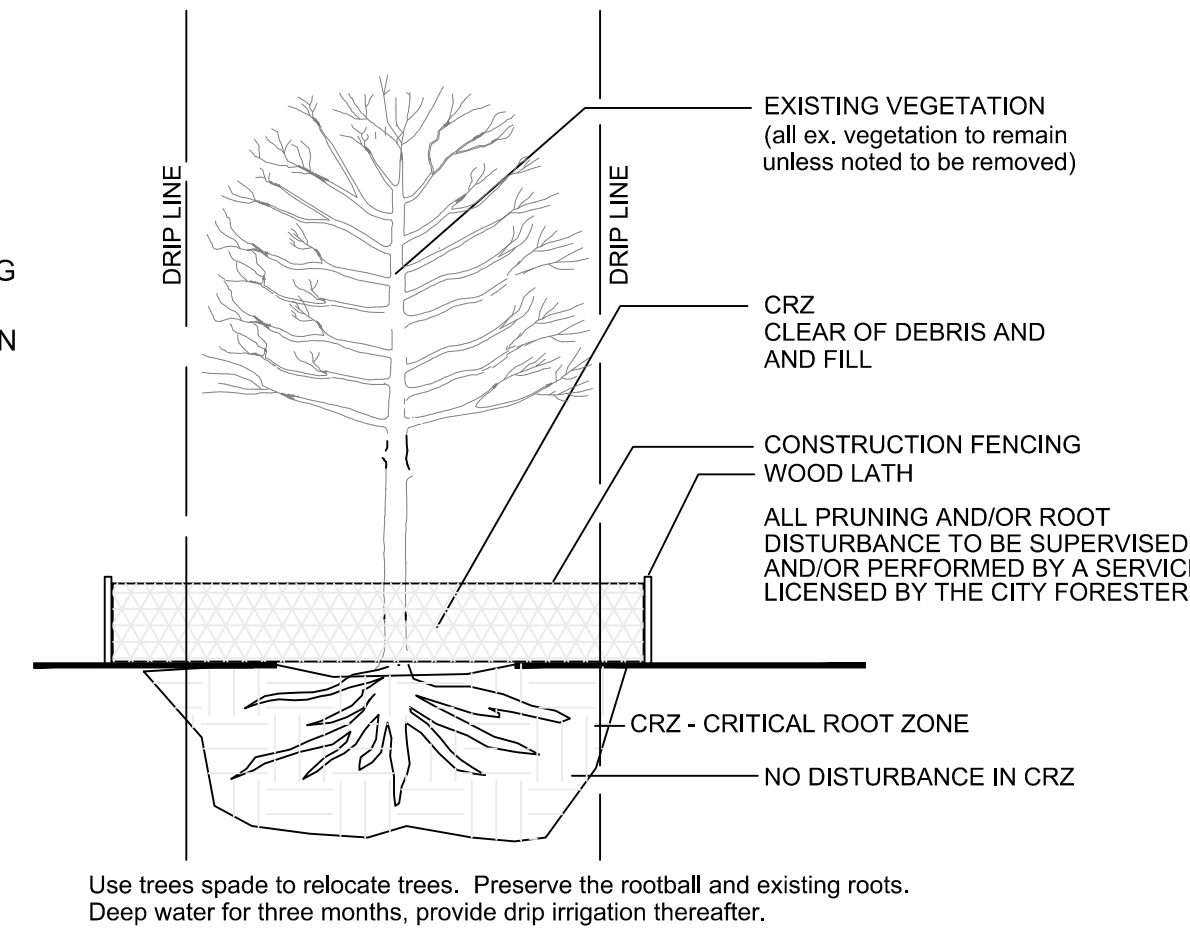


SITE CATEGORY REQUIREMENTS

ROADWAY LANDSCAPING (or Double Frontage Lot Streetscapes)					
Street Name or Zone Boundary (elev.)	Street Classification	Setback Width Req. / Prov.	Linear Footage 355 (phase 1)	Tree/Feet Required	No. of Trees Req. / Prov.
Northgate B'd	Major Arterial	25 / 25 +		1 / 20	18 / 15
Shrub and Orn. Grass Substitutes	Setback Plant Abbrev. Denoted on Plan	Percent Ground Plane Veg. Req. / Provided	High Water-use Turf %		
30 / 30	-	75% / 75%	0%		
PARKING LOTS					
No. of Vehicle Spaces Provided	Shade Trees (1/15) Required / Provided	Vehicle Lot Frontage (s)	Length of Frontage (ft.) (excluding driveways)	2/3 Length of Frontage (ft.)	
71 (10 Proposed)	4 / 4	N/A	154	103	
Frontage Screening Provided (LF)	Evergreen LF Req. (50%) / Prov.	Length of Screening Wall or Berm Provided	Vehicle Lot Plant Abstr. on Plan	Percent Ground Plane Veg. Req. / Provided	
110	55	-	N/A	75% / 80%	
INTERNAL LANDSCAPING					
Net Site Area (SF) (less Public R.O.W.)	Percent Min. Internal Area (%)	Internal Area (SF) Required / Provided	Internal Trees (1/500 SF) Required / Provided	Internal Trees (1/500 SF) Shrub Sub Req/Prov	
142,844 (phase 1)	5%	7,142 / (10,252)	14 / 14 (8 existing)	0 / 0	
Internal Plant Abbr. Denoted on Plan	Percent Ground Plane Veg. Req. / Provided				
IN	75% / 86%				
LANDSCAPE BUFFERS & SCREENS - N/A					
Street Name or Property Line (elev.)	Width (in. ft.) Req. / Prov.	Linear Footage	Buffer Trees (1/25) Required / Provided	Evergreen Trees Req. (50%) / Provided	Length of 6 ft. Opaque Structure Req. / Prov.

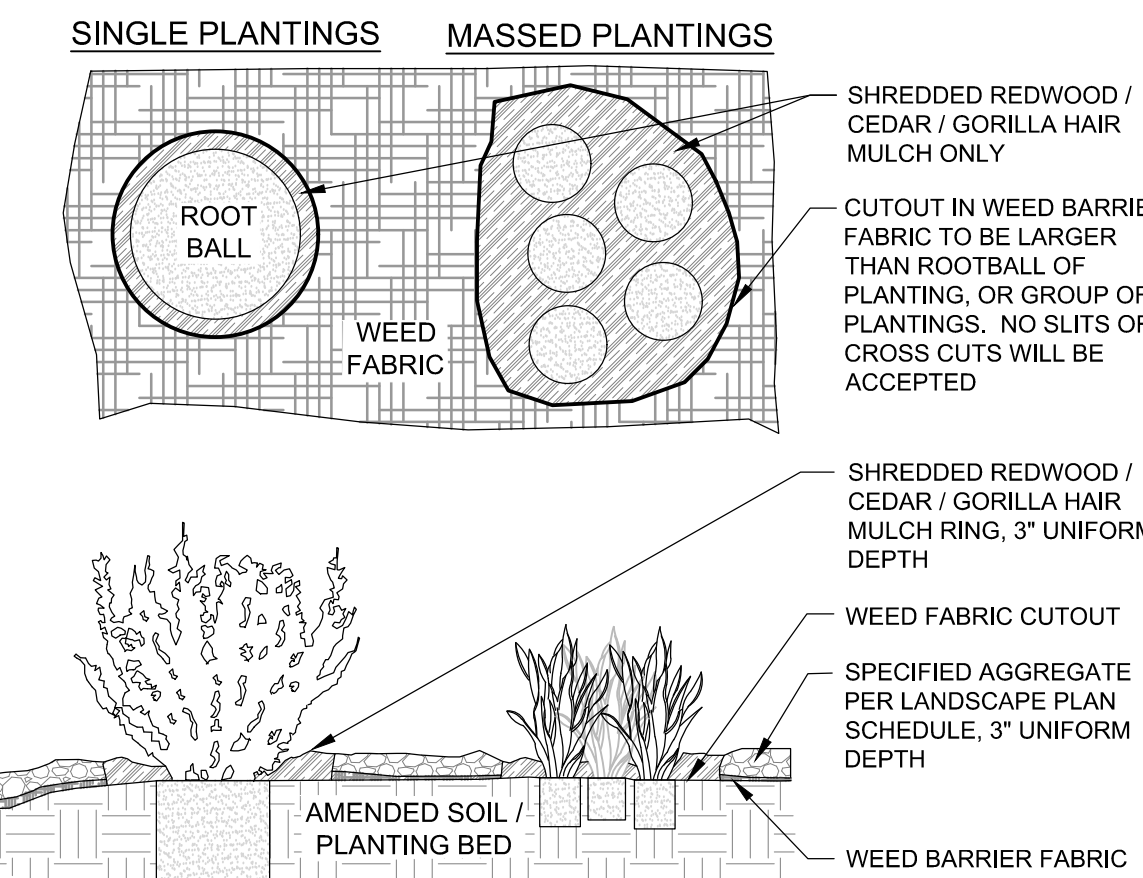

L2.0 FABRIC CUTOUT / WOOD MULCH RING DETAIL
NOT TO SCALE

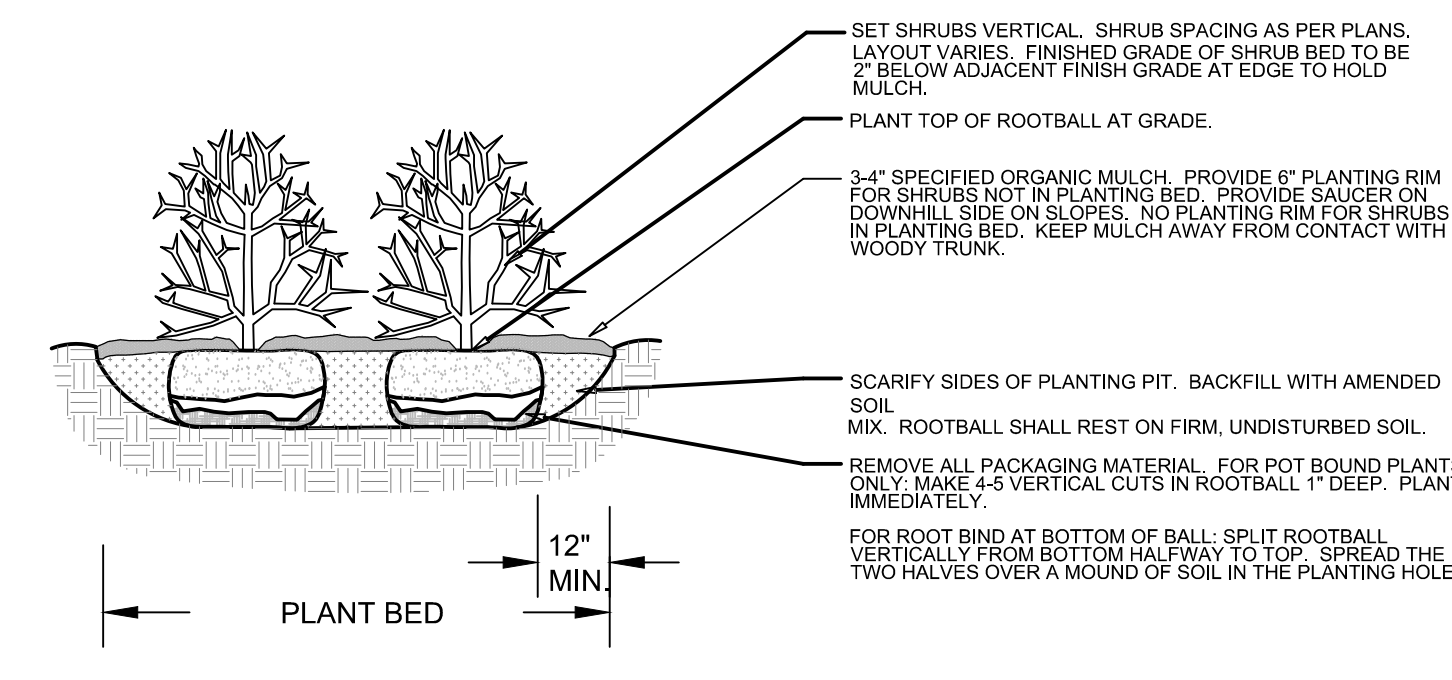


L2.0 SHRUB PLANTING DETAIL
SECTION

CROSSROADS CHAPEL - AMENDMENT

COLORADO SPRINGS, CO

LANDSCAPE PLAN DETAILS & NOTES

PROJ. NO.:
DATE: 08.20.25
SCALE: See Sheet
DRAWN: NAM
CHKD BY: NAM
SHEET L20

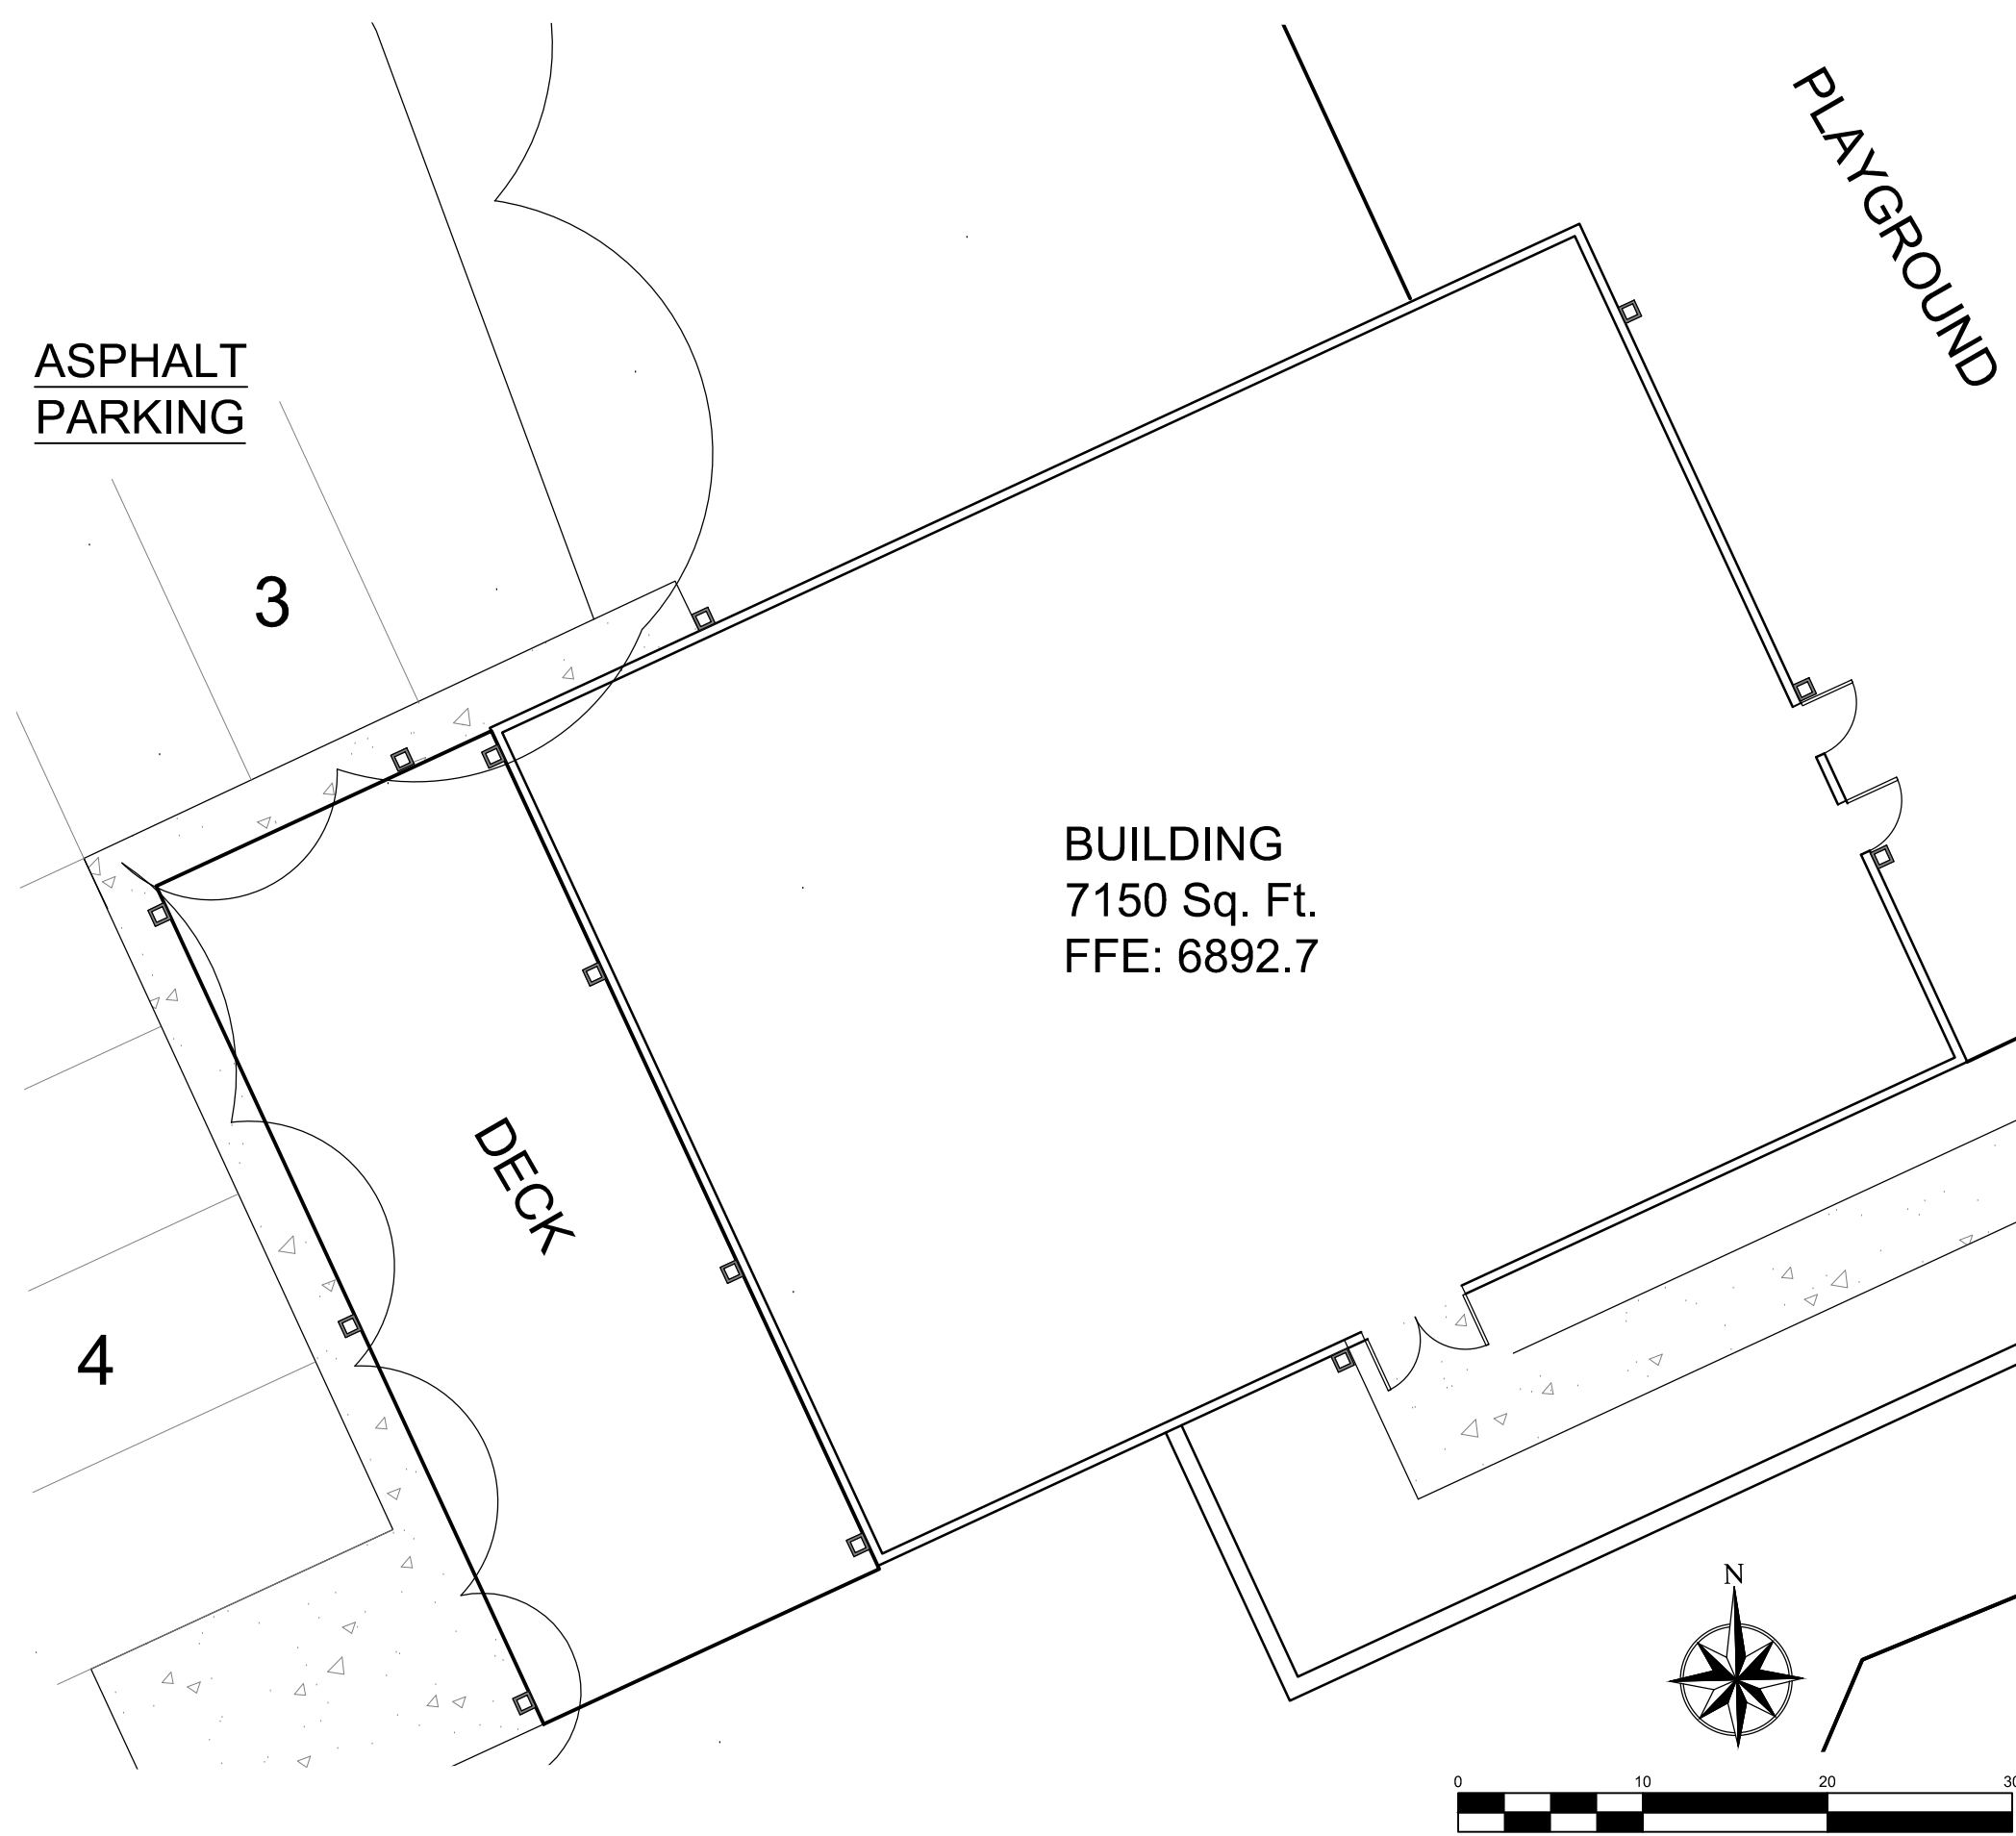

BUILDING EXTERIOR LIGHTING PLAN

SCALE: 1" = 10'

LUMINAIRE SCHEDULE

SYMBOL	QUANTITY	DESCRIPTION	LUMENS	WATTS	FINISH	BULB	MODEL
	13	UP/DOWN WALL LIGHT	1000	60	MATTE BLACK/BRONZE	4"A19 LED	K1211



Up and Down Lights Outdoor Wall Light Dusk to Dawn, Exterior Light Fixture Wall Mount 2 Pack, Matte Black Front Porch Light, IP65 Outdoor Wall Sconce for Patio, Garage, Front Door - ETL Listed

Outdoor Wall Lights Dusk to Dawn - 13" Exterior Up and Down Lights outdoor Fixture Sand Matte Black built-in IC light sensor. This outdoor wall sconce can sensitively detect the brightness of surrounding, modern outdoor wall light turn on at night and turn off at daytime, free your hands. Patio wall light fixture Perfect for your porch, Garage, walkway, pathway, garden, poolside or villa.

Anti-Rust & Weather Resistance – 2-light exterior wall light fixture are Made of the heavy-duty die-cast aluminum alloy, our outdoor lights is Weather-resistant & Rust-resistant, Waterproof IP54, Wall lighting Ideal for exterior porch, patio, Balcony, garden, open field. Easy set up as exterior lighting or as a security wall light above your front door.

ETL Listed Outdoor Lights for House - Meet American electric standard, Hard-wired, Input Voltage 100-240V. This outdoor wall light fixture is great addition for your house. Manufacturer offer 2-Year-Warranty.

Technical Details

Brand	iYogaled
Color	Black
Material	Aluminum
Style	Modern
Light fixture form	Sconce
Product Dimensions	4"L x 4"W x 13"H
Specific Uses For Product	Outdoor Or Indoor use
Indoor/Outdoor Usage	Outdoor
Power Source	AC 100-240V
Installation Type	Flush Mount
Special Feature	Waterproof
Control Method	Touch
Light Source Type	Incandescent
Finish Type	Oil Rubbed
Shade Material	Glass
Number of Light Sources	2
Voltage	120 Volts (AC)
Shape	Square
Included Components	Light kit included
Warranty Type	Limited
Lighting Method	Up and Down Light
Specification Met	ETL
Item Weight	3 Pounds
Wattage	60 watts
Bulb Base	E26 Medium
Controller Type	Push Button
Switch Type	Touch
Water Resistance Level	Water Resistant
Brightness	1000 Lumen
Mounting Type	Wall Mount
Shade Color	Matte Black
Fixture Type	Freestanding
Manufacturer	iYogaled
UPC	720310873469
Part Number	K1213
Item model number	K1213
Finish types	Oil Rubbed
Maximum Compatible Wattage	100 Watts
Special Features	Waterproof
Plug Format	A- US style
Color Temperature	5000 Kelvin
Color Rendering Index (CRI)	80.00
Average Life	50000 Hours

REVISIONS:
Amendment Area 9.10.25

NDS
NATURAL DESIGN SOLUTIONS
Landscape Architecture
Land Planning - Irrigation Design
9539 Cole Drive, Longmont, CO 80503
(303) 443-0388 • nrd@ndcolorado.com

CROSSROADS CHAPEL - AMENDMENT
COLORADO SPRINGS, CO
EXTERIOR LIGHTING PLAN

PROJ. NO.:
DATE: 08.20.25
SCALE: See Sheet
DRAWN: NAM
CHKD BY: NAM
SHEET E10