

**FINAL DRAINAGE LETTER**  
**FOR**  
**LOT 35, CLAREMONT BUSINESS PARK**  
**FILING NO. 2**  
**EL PASO COUNTY, COLORADO**

FEBRUARY 2018

Prepared for:

**Hammers Construction, Inc.**  
**1411 Woolsey Heights**  
**Colorado Springs, CO 80915**

Prepared by:



20 Boulder Crescent, Suite 110  
Colorado Springs, CO 80903  
(719) 955-5485

Project #44-029  
PCD Project No. PPR-17-056

Lot 35

Replace with the County standard statement:  
The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the applicable master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.  
**Unresolved.**

ENGINEERS STATEMENT

The attached drainage plan and report was prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria acceptable to the City of Colorado Springs. I accept responsibility for any liability caused by any negligent acts, errors of omission on my part in preparing this report.

\_\_\_\_\_  
Virgil A. Sanchez, P.E. #37160  
For and on Behalf of M&S Civil Consultants, Inc

DEVELOPER'S STATEMENT

I, the developer have read and will comply with all the requirements specified in this drainage report and plan.

BY: \_\_\_\_\_

TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

ADDRESS: Hammers Construction, LLC  
1411 Woolsey Heights  
Colorado Springs, CO 80915

El Paso County Criteria Manual  
**Unresolved.**

EL PASO COUNTY'S STATEMENT

Filed in accordance with the requirements of El Paso County Land Development Code, Drainage Criteria Manual Volumes 1 and 2, and the Engineering Manual, as amended.

BY: \_\_\_\_\_

DATE: \_\_\_\_\_

Jennifer Irvine, P.E.  
County Engineer / ECM Administrator

CONDITIONS:





20 Boulder Crescent, Suite 110  
Colorado Springs, CO 80903  
Mail to: P.O. Box 1360  
Colorado Springs, CO 80901  
719.955.5485

February 13, 2018

Attn: Jennifer Irvine, P.E.  
El Paso County Engineer  
2880 International Circle  
Colorado Springs, Colorado 80910

RE: Final Drainage Letter for Lot 35, Claremont Business Park Filing No. 2, in El Paso County, Colorado.

Dear Jennifer,

The purpose of this letter is to show that there shall be no negative drainage effects associated with the proposed development of Lot 35 within the Claremont Business Park Filing No. 2, recorded January 4, 2007 under Reception No. 207712506 of the El Paso County Records. This final drainage letter is being submitted concurrently with the improvement construction plans proposing a 6,250 SF building and the associated parking improvements.

**Property Description:**

The proposed project site is within the Northeast Quarter of Section 8, Township 14 South, Range 65 West of the 6th Principal Meridian. Lot 35 consist of 0.5 acres and is currently vacant. The proposed project consist of all infrastructure typically associated with a 6,250 SF building structure. The majority of the site will consist of asphalt, curb, lighting, a Storm Water Quality Facility (Permeable Pavement System) and landscaping.

**Existing Drainage Characteristics:**

The site, which is located West of Meadowbrook Parkway, within an established commercial / light industrial neighborhood is bound to the Southeast by Cole View private roadway, and then to the Northeast and Southwest by commercial Lots 34 and 36, and then to the Northwest by the existing East Fork Sand Creek Channel. The site is currently vacant land with a relatively new roadway infrastructure and associated utilities with slopes ranging between 0-4% from East to West. Flows from the site run in a sheet-flow manner from East to West to the West property line to an existing curb where flows continue southerly through an existing curb chase onto Lot 34 and then eventually outfalls to an existing storm sewer collection system at the Southwest corner of Lot 33 and ultimately discharges to the East Fork Sand Creek.

**Floodplain Statement:**

According to the Federal Emergency Management Agency (FEMA) Flood Insurance Rate Map (FIRM) No. 08041C0752 F, dated March 17, 1997, and as amended by the FEME approved Revision LOMR dated 12/13/2006, none of the site lies in a designated flood plain. The nearest major drainage way is East Fork Sand Creek just Northwest of the commercial business park.

Update and include the LOMR:  
... and as amended by the FEMA approved Letter of Map  
Revision (LOMR) case number \_\_\_\_\_ dated \_\_\_\_\_...  
**Unresolved. Include the case number.**

### **Proposed drainage characteristics:**

The proposed project consist of all infrastructure typically associated with a 6,250 SF building structure. The majority of the site will consist of asphalt, curb, lighting, a Storm Water Quality Facility (Permeable Pavement System) and landscaping. The subject site was previously analyzed within the Final Drainage Report for Claremont Business Park Filing No. 2 prepared by Matrix Design Group approved April 24, 2006. On-site WQCV is required but on-site stormwater detention is not required per the FDR for Claremont Business Park Fil. 2.

The post-developed flows from Lot 35 (to include the North half of the building roof) shall be directed to a Storm Water Quality Facility (Permeable Pavement System) that straddles the South property line of Lot 35 and the North property line of Lot 34. Maintenance for said WQ Facility shall be the responsibility of the owner of Lot 35. A Drainage & Maintenance Easement Agreement shall be recorded by separate instrument over encroached portion of Lot 34. (See grading plan included within this report).

Flows released from the Storm Water Quality Facility and any additional overflow shall outfall through a 3" x 5' wide curb notch at the southwest corner of the WQ facility and then continue along the existing curb line along the West property line of Lots 34 & 33 and eventually outfalls to an existing storm sewer collection system at the Southwest corner of Lot 33 then ultimately discharges to the East Fork Sand Creek.

Pre-developed flows from the currently vacant Lot 36 (Northeast) shall flow via the existing curb along the West property line and outfall through the 3' wide curb opening at the West property corner of Lot 35. Upon the time of development of Lot 36, post-developed flows shall be analyzed and shall be designed to ensure there are no adverse effects to the improvements to Lot 35.

### **FOUR STEP PROCESS**

**Step1 Employ Runoff Reduction Practices** – The project does not provide any runoff reduction practices.

**Step 2 Stabilize Drainageways** – The site is directly adjacent to the Sand Creek Channel. The Lot 35 site proposed a Storm Water Quality Facility (Permeable Pavement System) before discharging East Fork Sand Creek. The proposed WQ system has been designed to drain a peak event within 12 hours, therefore is not anticipated to have negative effects on downstream drainageways.

**Step 3 Provide Water Quality Capture Volume** – A Storm Water Quality Facility (Permeable Pavement System) is proposed to provide WQCV.

**Step4 Consider Need for Industrial and Commercial BMP's** – This submittal provides a final grading and erosion control plans with BMPs in place. The proposed project will use silt fence, a vehicle tracking control pad, a concrete washout area, mulching and reseeding to mitigate the potential for erosion across the site.

### **Water Quality Provisions:**

Lot 35's on-site WQCV shall be directed to a Storm Water Quality Facility (Permeable Pavement System) as detailed within the grading plans. (See grading plan included within this report). The percolation test findings per the Percolation Test by Geoquest, LLC dated October 13, 2016 (included within the report), conclude that the test holes drained at a rate of 16-20 minutes per inch. Using the conservative 16.0min/in for the 24 inches of permeable pavement storage the detention should drain in 3.5 hours

The proposed Water Quality Facility is a Partial Infiltration section as detailed in the UDFCD Permeable Pavement Systems w/ a 6" high curb around the paver's edge to ensure flows have an opportunity to infiltrate through the system. Any additional overflow shall outfall through a 3" x 5' wide curb notch at the southwest corner of the WQ facility and then continue along the existing curb line along the West property line of Lots

34 & 33 and eventually outfalls to an existing storm sewer collection system at the Southwest corner of Lot 33 then ultimately discharges to the East Fork Sand Creek.

Flows released from the Storm Water Quality Facility through the underdrain shall outfall into the Sand Creek Channel via a 6" Solid PVC.

Proposed construction BMP's (silt fence) will capture any silt caused by construction before it can make it into the existing channel.

**Private Water Quality Facility - Cost Estimate:**

Private Water Quality Facility (Permeable Pavement System): **\$8,000.00**

**Drainage fees:**

No drainage fees are due as the site has been previous platted.

**Conclusion:**

No negative drainage effects associated with the proposed development of Lot 35 within the Claremont Business Park Filing No. 2.


This proposal does not conflict or change the specifications as previously detailed within the "Final Drainage Report for Claremont Business Park Filing No. 2" prepared by Matrix Design Group approved April 24, 2006

This letter has been prepared according to the County drainage criteria and is being submitted for approval. If you have any question about this submittal, please feel free to call me at 719-491-0818 or email me at [Virgils@mscivil.com](mailto:Virgils@mscivil.com)

Sincerely,

Virgil A. Sanchez

**VICINITY MAP**

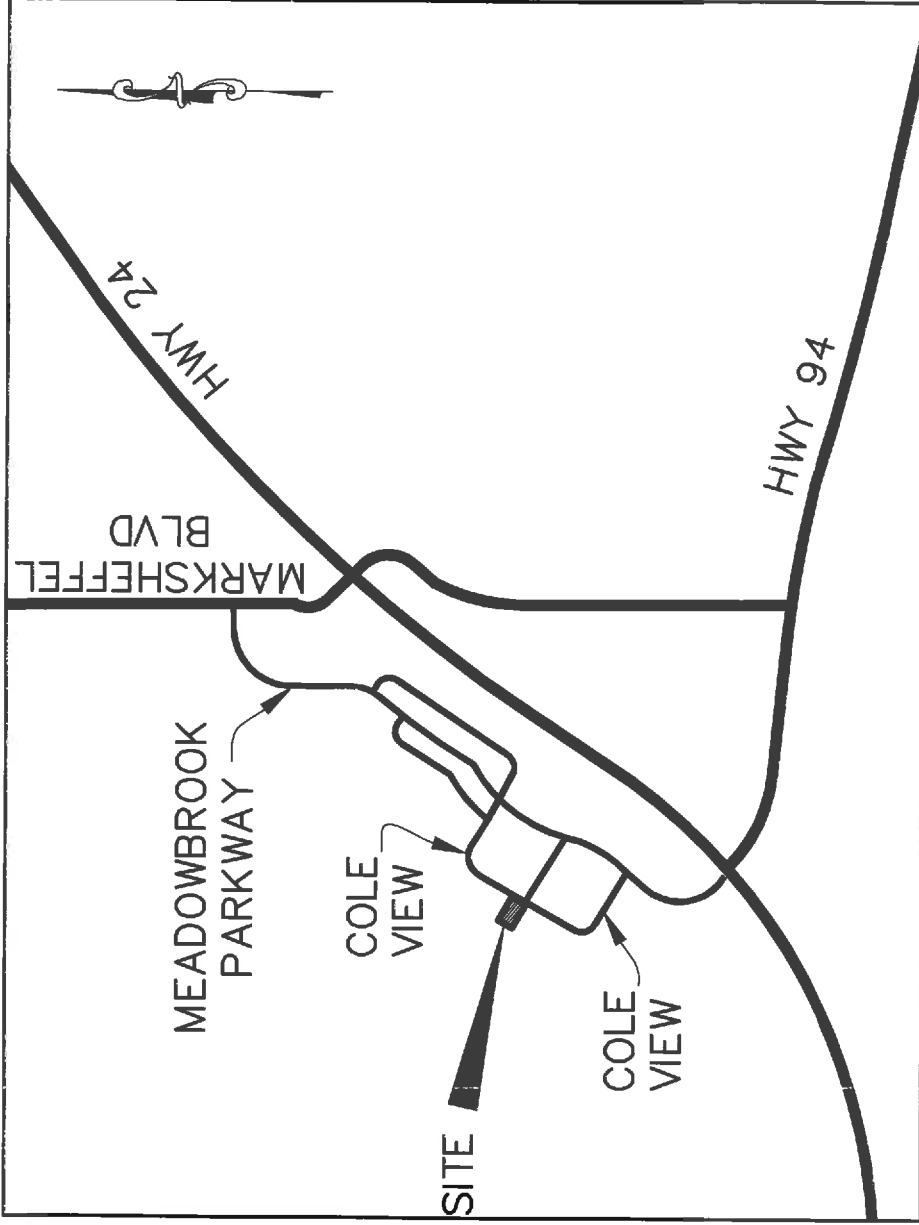

VICINITY MAP  
N.T.S.

## **PERMEABLE PAVEMENT SYSTEM**

## Description

The term *Permeable Pavement System*, as used in this manual, is a general term to describe any one of several pavements that allow movement of water into the layers below the pavement surface. Depending on the design, permeable pavements can be used to promote volume reduction, provide treatment and slow release of the water quality capture volume (WQCV), and reduce effective imperviousness. Use of permeable pavements is a common Low Impact Development (LID) practice and is often used in combination with other BMPs to provide full treatment and slow release of the WQCV. A number of installations within the UDFCD



**Photograph PPS-1.** The reservoir layer of a permeable pavement provides storage volume for the WQCV. Photo courtesy of Muller Engineering and Jefferson County Open Space.

boundary have also been designed with an increased depth of aggregate material in order to provide storage for storm events in excess of the water quality (80th percentile) storm event. This requires some additional design considerations, which are discussed within this BMP Fact Sheet.

## Site Selection

This infiltrating BMP requires consultation with a geotechnical engineer when proposed near a structure. In addition to providing the pavement design, a geotechnical engineer can assist with evaluating the suitability of soils, identifying potential impacts, and establishing minimum distances between the BMP and structures.

Permeable pavement systems provide an alternative to conventional pavement in pedestrian areas and lower-speed vehicle areas. They are not appropriate where sediment-laden runoff could clog the system (e.g., near loose material storage areas).

This BMP is not appropriate when erosive conditions such as steep slopes and/or sparse vegetation drain to the permeable pavement. The sequence of construction is also important to preserve pavement infiltration. Construction of the pavement should take place only after construction in the watershed is complete.

For sites where land uses or activities can cause infiltrating stormwater to contaminate groundwater, special design requirements are required to ensure no-infiltration from the pavement section.

Permeable Pavement	
<b>Functions</b>	
LID/Volume Red.	Yes
WQCV	Yes
WQCV+Flood Control	Yes
Fact Sheet Includes EURV Guidance	No
<b>Typical Effectiveness for Targeted Pollutants<sup>3</sup></b>	
Sediment/Solids	Very Good <sup>1</sup>
Nutrients	Good
Total Metals	Good
Bacteria	Unknown
<b>Other Considerations</b>	
Life-cycle Costs <sup>4</sup>	High <sup>2</sup>
<sup>1</sup> Not recommended for watersheds with high sediment yields (unless pretreatment is provided). <sup>2</sup> Does not consider the life cycle cost of the conventional pavement that it replaces. <sup>3</sup> Based primarily on data from the International Stormwater BMP Database ( <a href="http://www.bmpdatabase.org">www.bmpdatabase.org</a> ). <sup>4</sup> Based primarily on BMP-REALCOST available at <a href="http://www.udfcd.org">www.udfcd.org</a> . Analysis based on a single installation (not based on the maximum recommended watershed tributary to each BMP).	

Permeable pavements and other BMPs used for infiltration that are located adjacent to buildings, hardscape or conventional pavement areas can adversely impact those structures if protection measures are not provided. Wetting of subgrade soil underlying those structures can cause the structures to settle or result in other moisture-related problems. Wetting of potentially expansive soils or bedrock can cause those materials to swell, resulting in structure movements. In general, a geotechnical engineer should evaluate the potential impact of the BMP on adjacent structures based on an evaluation of the subgrade soil, groundwater, and bedrock conditions at the site. In addition, the following minimum requirements should be met:

- In locations where subgrade soils do not allow infiltration, the pavement section should include an underdrain system.
- Where infiltration can adversely impact adjacent structures, the filter layer should be underlain by an underdrain system designed to divert water away from the structure.
- In locations where potentially expansive soils or bedrock exist, placement of permeable pavement adjacent to structures and conventional pavement should only be considered if the BMP includes an underdrain designed to divert water away from the structure and is lined with an essentially impermeable geomembrane liner designed to restrict seepage.

## Designing for Maintenance

Recommended ongoing maintenance practices for all BMPs are provided in the BMP Maintenance chapter of this manual. During design and construction, the following should be considered to ensure ease of maintenance over the long-term:

- Hold a pre-construction meeting to ensure that the contractor has an understanding of how the pavement is intended to function. Discuss the contractor's proposed sequence of construction and look for activities that may require protection of the permeable pavement system.
- Ensure that the permeable pavement is protected from construction activities following pavement construction (e.g., landscaping operations). This could include covering areas of the pavement, providing alternative construction vehicle access, and providing education to all parties working on-site.
- Include an observation well to monitor the drain time of the pavement system over time. This will assist with determining the required maintenance needs. See Figure PPS-8.

## Benefits

- Permeable pavement systems provide water quality treatment in an area that serves more than one purpose. The depth of the pavement system can also be increased to provide flood control.
- Permeable pavements can be used to reduce effective imperviousness or alleviate nuisance drainage problems.
- Permeable pavements benefit tree health by providing additional air and water to nearby roots.
- Permeable pavements are less likely to form ice on the surface than conventional pavements.
- Some permeable pavements can be used to achieve LEED credits.

## Limitations

- Additional design and construction steps are required for placement of any ponding or infiltration area near or upgradient from a building foundation, particularly when potentially expansive soils exist. This is discussed in the design procedure section.
- In developing or otherwise erosive watersheds, high sediment loads can clog the facility.



- Call for construction fence on the plans around pervious areas where infiltration rates need to be preserved and could be reduced by compaction from construction traffic or storage of materials.

### Example Construction Drawing Notes

- Excavation of subgrade shall not commence until after the pre-construction meeting.
- Subgrade shall be excavated using low ground pressure (LGP) track equipment to minimize over compaction of the subgrade.<sup>1</sup>
- Grading and compaction equipment used in the area of the permeable pavement should be approved by the engineer prior to use.
- Loose materials shall not be stored on the permeable pavement area.
- The contractor shall, at all times during and after system installation, prevent sediment, debris, and dirt from any source from entering the permeable pavement system.
- Placement of the wearing course shall be performed after fine grading and landscaping in adjacent areas is complete. If the wearing course becomes clogged due to construction activities, clean the surface with a vacuum machine to restore the infiltration rate after construction is complete.

<sup>1</sup> For partial and full infiltration sections only.

## Design Procedure and Criteria

Note: This manual includes a variety of specific pavements, which are discussed and distinguished in supplemental BMP Fact Sheets T-10.1, T-10.2, etc. This BMP Fact Sheet outlines the design procedure and other design components and considerations that are common to all of the systems. Review of the supplemental Fact Sheets is recommended to determine the appropriate pavement for a specific site or use.

1. **Subsurface Exploration and Determination of a No-Infiltration, Partial Infiltration, or Full Infiltration Section:** Permeable pavements can be designed with three basic types of sections. The appropriate section will depend on land use and activities, proximity to adjacent structures and soil characteristics. Sections of each installation type are shown in Figure PPS-1.
  - **No-Infiltration Section:** This section includes an underdrain and an impermeable liner that prevents infiltration of stormwater into the subgrade soils. Consider using this section when any of the following conditions exist:
    - Land use or activities could contaminate groundwater if stormwater is allowed to infiltrate.
    - Permeable pavement is located over potentially expansive soils or bedrock that could swell due to infiltration and potentially damage the permeable pavement system or adjacent structures (e.g., building foundation or conventional pavement).

- **Partial Infiltration Section:** This section does not include an impermeable liner, and allows some infiltration. Stormwater that does not infiltrate is collected and removed by an underdrain system.
- **Full Infiltration Section:** This section is designed to infiltrate the water stored in the voids of the pavement into the subgrade below. UDFCD recommends a minimum infiltration rate of 2 times the rate needed to drain the WQCV over 12 hours.

**Subsurface Exploration and Testing for all Sections:** A geotechnical engineer should scope and perform a subsurface study. Typical geotechnical investigation needed to select and design the pavement system for handling anticipated traffic loads includes:

- Prior to exploration review geologic and geotechnical information to assess near-surface soil, bedrock and groundwater conditions that may be encountered and anticipated ranges of infiltration rate for those materials. For example, if the site is located in a general area of known shallow, potentially expansive bedrock, a no-infiltration section will likely be required. It is also possible that this BMP may be infeasible, even with a liner, if there is a significant potential for damage to the pavement system or adjacent structures (e.g., areas of dipping bedrock).
- Drill exploratory borings or exploratory pits to characterize subsurface conditions beneath the subgrade and develop requirements for subgrade preparation. Drill at least one boring or pit for every 40,000 ft<sup>2</sup>, and at least two borings or pits for sites between 10,000 ft<sup>2</sup> and 40,000 ft<sup>2</sup>. The boring or pit should extend at least 5 feet below the bottom of the base, and at least 20 feet in areas where there is a potential of encountering potentially expansive soils or bedrock. More borings or pits at various depths may be required by the geotechnical engineer in areas where soil types may change, in low-lying areas where subsurface drainage may collect, or where the water table is likely within 8 feet below the planned bottom of the base or top of subgrade. Installation of temporary monitoring wells in selected borings or pits for monitoring groundwater levels over time should be considered where shallow groundwater that could impact the pavement system area is encountered.
- Perform laboratory tests on samples obtained from the borings or pits to initially characterize the subgrade, evaluate the possible section type, and to assess subgrade conditions for supporting traffic loads. Consider the following tests: moisture content (ASTM D 2216); dry density (ASTM D 2936); Atterberg limits (ASTM D 4318); gradation (ASTM D 6913); swell-consolidation (ASTM D 4546); subgrade support testing (R-value, CBR or unconfined compressive strength); and hydraulic conductivity. A geotechnical engineer should determine the appropriate test method based on the soil type.
- For sites where a full infiltration section may be feasible, perform on-site infiltration tests using a double-ring infiltrometer (ASTM D 3385). Perform at least one test for every 160,000 ft<sup>2</sup> and at least two tests for sites between 40,000 ft<sup>2</sup> and 160,000 ft<sup>2</sup>. The tests should be located near completed borings or pits so the test results and subsurface conditions encountered in the borings can be compared, and at least one test should be located near the boring or pit showing the most unfavorable infiltration condition. The test should be performed at the planned top of subgrade underlying the permeable pavement system, and that subgrade should be prepared similar to that required for support of the permeable pavement system.
- Be aware that actual infiltration rates are highly variable dependent on soil type, density and moisture content and degree of compaction as well as other environmental and construction influences. Actual rates can differ an order of magnitude or more from those indicated by

infiltration or permeability testing. Selection of the section type should be based on careful assessment of the subsurface exploration and testing data.

2. **Required Storage Volume:** Provide the WQCV based on a 12-hour drain time.
- Find the required WQCV (watershed inches of runoff). Using the effective impervious area of the watershed area, use Figure 3-2 located in Chapter 3 to determine the WQCV based on a 12-hour drain time. The maximum recommended ratio for tributary impervious area to permeable pavement area is 2.0. Higher loading is not recommended, as it may increase the required maintenance interval.
  - Calculate the design volume as follows:

$$V = \left[ \frac{\text{WQCV}}{12} \right] A \quad \text{Equation PPS-1}$$

Where:

$A$  = watershed area tributary to the permeable pavement (ft<sup>2</sup>)

$V$  = design volume (ft<sup>3</sup>)

- Add flood control volume if desired. When designing for flood control volumes, provide an overflow that will convey runoff in excess of the WQCV directly into the reservoir. A gravel strip or inlet that is connected to the reservoir can provide this overflow.

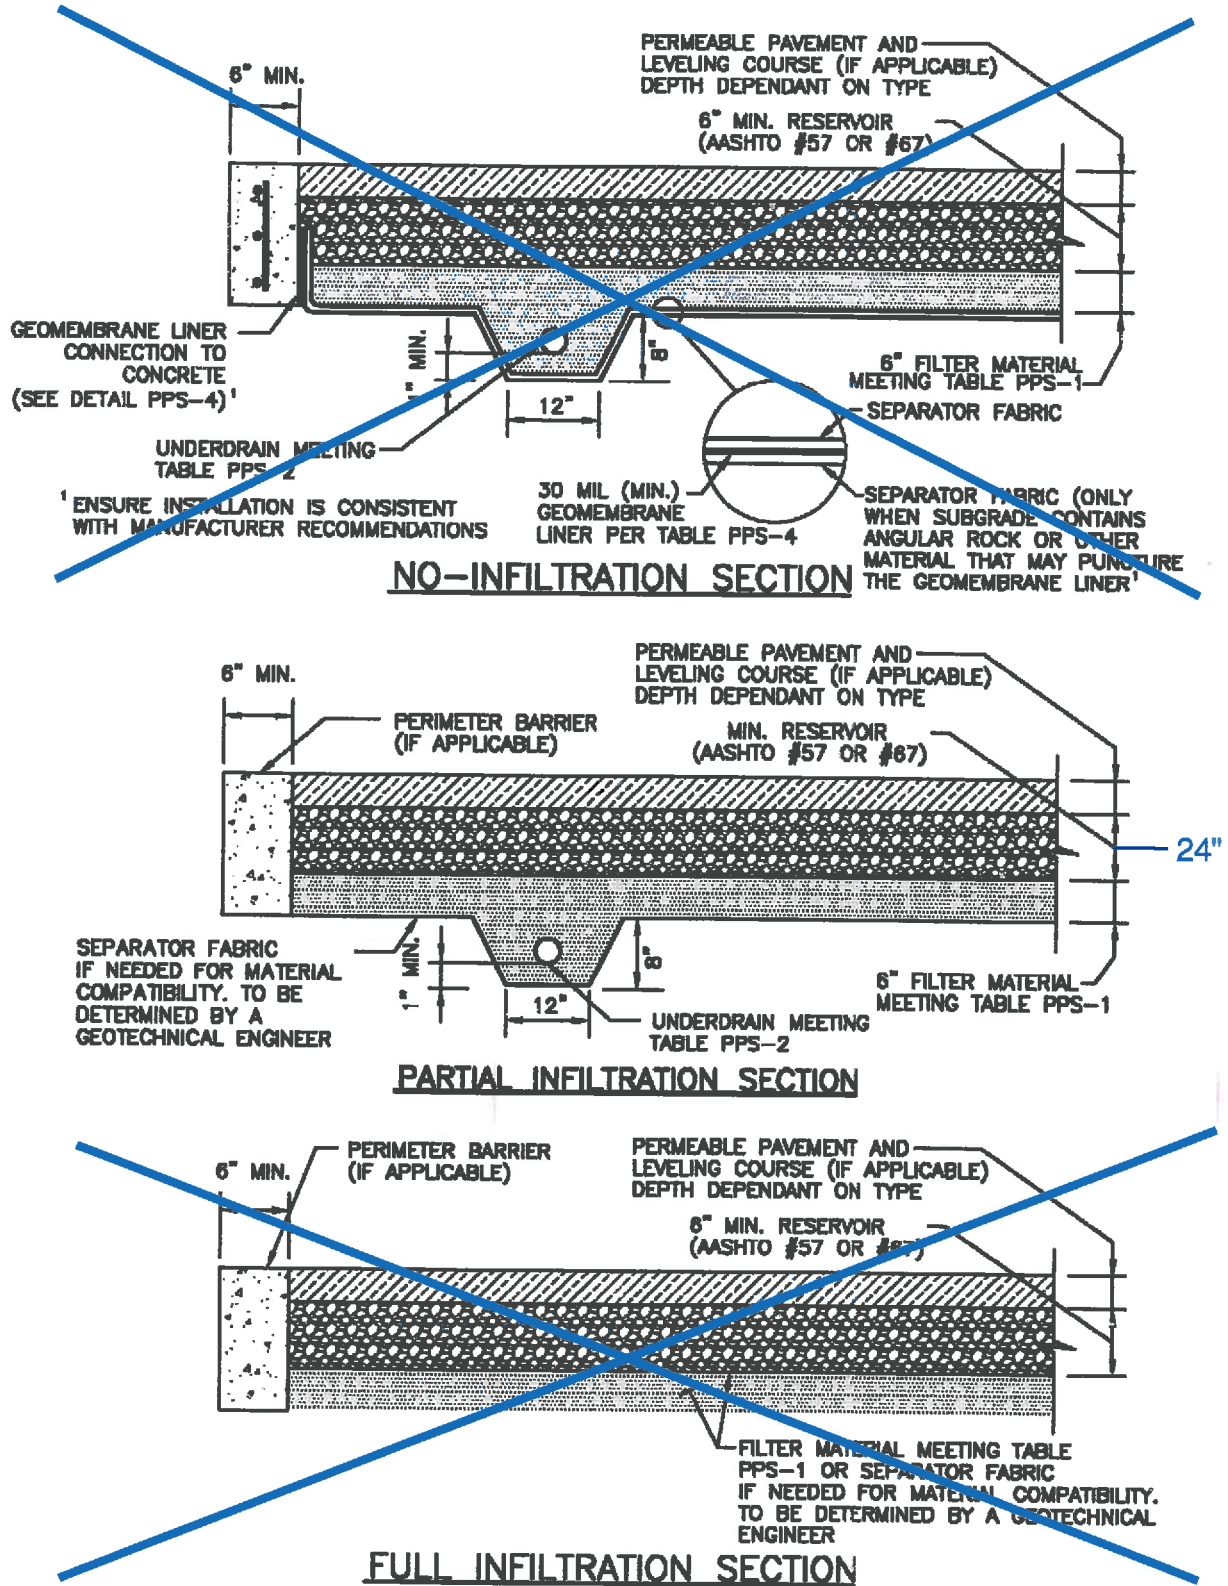


Figure PPS-1. Permeable Pavement Sections

3. **Depth of Reservoir:** The minimum recommended depth of AASHTO No. 57 or No. 67 coarse aggregate is 6 inches. Additional depth may be required to support anticipated loads or to provide additional storage, (i.e., for flood control). This material should have all fractured faces. UDFCD recommends that void storage be calculated only for the reservoir, assuming the aggregate filter layer is saturated. With the exception of porous gravel pavement, use a porosity of 40% or less for both No. 57 and No. 67 coarse aggregate. For porous gravel pavement use a porosity of 30% or less to account for reduced volume due to sediment. Porous gravel pavements typically allow greater sediment volumes to enter the pavement. See Figures PPS-2 and PPS-3 for alternative pavement profiles. Calculate available storage using equation PPS-2 for a flat subgrade installation, and PPS-3 for a sloped subgrade installation. These equations allow for one inch of freeboard. Flat installations are preferred as the design spreads infiltration evenly over the subgrade. For sloped subgrade installations, the increased storage depth located upstream of the lateral barrier (see step 7) can increase lateral movement (parallel to the flow barrier) of water into areas adjacent to the pavement section.

When used for vehicular traffic, a pavement design should be performed by a qualified engineer experienced in the design of permeable pavements and conventional asphalt and concrete pavements. The permeable pavement should be adequately supported by a properly prepared subgrade, properly compacted filter material and reservoir material.

Reservoir aggregate should have all fractured faces. Place the aggregate in 6-inch (maximum) lifts, compacting each lift by using a 10-ton, or heavier, vibrating steel drum roller. Make at least four passes with the roller, with the initial passes made while vibrating the roller and the final one to two passes without vibration.

- For flat or stepped installations (0% slope at the reservoir/subgrade interface):

$$V = P \left[ \frac{D - 1}{12} \right] A \quad \text{Equation PPS-2}$$

Where:

$V$  = volume available in the reservoir (ft<sup>3</sup>)

$P$  = porosity,  $\leq 0.30$  for porous gravel,  $\leq 0.4$  for all other pavements  
using AASHTO No. 57 or No. 67 coarse aggregate in the reservoir

$D$  = depth of reservoir (in)

$A$  = area of the permeable pavement (ft<sup>2</sup>)

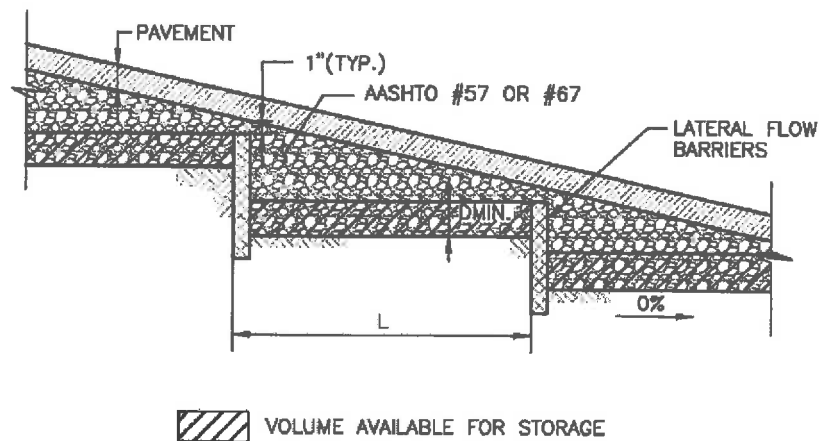


Figure PPS-2. Permeable Pavement Profile, Stepped Installation

- For sloped installations (slope of the reservoir/subgrade interface  $> 0\%$ ):


$$V = P \left[ \frac{D - 6sL - 1}{12} \right] A \quad \text{Equation PPS-3a}$$

While:

$$L < \frac{2 \text{WQCV}}{sAP} \quad \text{Equation PPS-3b}$$

Where:

- $V$  = volume available in the reservoir ( $\text{ft}^3$ )
- $P$  = porosity,  $\leq 0.30$  for porous gravel,  $\leq 0.4$  for all other pavements using AASHTO No. 57 or No. 67 coarse aggregate in the reservoir
- $s$  = slope of the reservoir/subgrade interface (ft/ft)
- $D$  = depth of the reservoir (in)
- $L$  = length between lateral flow barriers (see step 4) (ft)
- $A$  = area of the permeable pavement ( $\text{ft}^2$ )
- WQCV = water quality capture volume ( $\text{ft}^3$ )

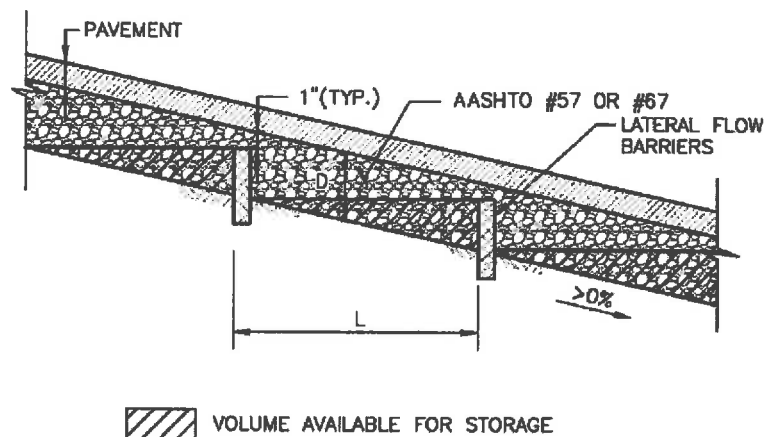

**Figure PPS-3. Permeable Pavement Profile, Sloped Installation.**

4. **Lateral Flow Barriers:** Construct lateral flow cutoff barriers using concrete walls or a 30 mil (minimum) PVC geomembrane. Lateral flow barriers should be placed parallel to contours (normal to flow). This will preserve the volume available for storage and ensure that stormwater will not resurface, washing out infill material. See Figure PPS-6 and Table PPS-4 when using a PVC geomembrane for this purpose. Also include a separator fabric, per Table PPS-3, between the geomembrane and all aggregate materials. Lateral flow barriers should be installed in all permeable pavement installations that have a reservoir/subgrade interface greater than 0%. Lateral flow barriers should be spaced, as necessary, to satisfy equations PPS-3a and PPS-3b. One exception is reinforced grass pavement. Infill washout is not a concern with reinforced grass pavement.
  
5. **Perimeter Barrier:** For all no-infiltration sections, provide a reinforced concrete barrier on all sides of the pavement system. Perimeter barriers may also be recommended for other permeable pavement installations depending on the type or use of the pavement. For PICP and concrete grid pavement, a barrier is required to restrain movement of the pavers or grids. Precast, cast-in-place concrete or cut stone barriers are required for commercial vehicular areas. For residential use and commercial pedestrian use, a metal or plastic edge spiked with 3/8-inch-diameter, 10-inch-long nails provides a less expensive alternative for edge restraint.

For all pavements, consider the section beyond the permeable pavement when evaluating the perimeter design. The perimeter barrier helps force water into the underdrain and reduces lateral flow of water. Lateral flow can negatively impact the adjacent conventional pavement section, structure, or embankment (especially when the subgrade is sloped). Also consider material separation. Consider construction of the interface between the permeable pavement and the adjacent materials and how the design will prevent adjacent materials from entering the permeable pavement section. Depending on the soils, depth of pavement, and other factors, this may be achieved with fabric or may require a more formalized barrier.

When a permeable pavement section is adjacent to conventional pavement, a vertical liner may be required to separate the reservoir of the permeable pavement system from dense-graded aggregates and soils within the conventional pavement. An impermeable liner can be used to provide this vertical barrier and separate these two pavement systems.

No-Infiltration Section: For this type of section, the perimeter barrier also serves to attach the impermeable membrane. The membrane should extend up to the top of the filter layer and be firmly



attached to the concrete perimeter barrier using batten bars to provide a leak-proof seal. A nitrile-based vinyl adhesive can be used when the need for an impermeable liner is less critical. See Figures PPS-4 and PPS-5 for installation details. For ease of construction, including the placement of geotextiles, it is suggested that the barrier extend to the bottom of the filter layer.

**Partial and Full Infiltration Section:** The perimeter barrier for these sections also restricts lateral flow to adjacent areas of conventional pavement or other structures where excessive moisture and/or hydrostatic pressure can cause damage. When this is of particular concern, the perimeter barrier should be extended to a depth 12 inches or more below the underdrain. Otherwise, extend the barrier to the bottom of the filter layer.

- 6. Filter Material and Underdrain System:** An aggregate filter layer and underdrain are required for all partial and no-infiltration sections. Without this filter layer, the section will not provide adequate pollutant removal. This is based on research performed by UDFCD monitoring sites with and without this component. A filter or separator fabric may also be necessary under the reservoir in a full infiltration section if the subgrade is not filter compatible with the reservoir material such that finer subgrade soils could enter into the voids of the reservoir.

In previous versions of the USDCM, UDFCD recommended that the underdrain be placed in an aggregate drainage layer and that a geotextile separator fabric be placed between this drainage and the filter layer. This version of the USDCM replaces that fabric, which could more easily plug or be damaged during construction, with aggregate filter material that is filter-compatible with the reservoir, and a drainpipe with perforations that are filter-compatible with the filter material. This eliminates the need for a separator fabric between the reservoir and the underdrain layer. The filter material provided below should only be used with the underdrain pipe specified within this section.

The underdrain should be placed below a 6-inch-thick layer of CDOT Class C filter material meeting the gradation in Table PPS-1. Extend the filter material around and below the underdrain as shown in Figure PPS-1.

Provide clean-outs to allow inspection (by camera) of the drainpipe system during and after construction to ensure that the pipe was not crushed or disconnected during construction and to allow for maintenance of the underdrain.

Use of Class C Filter material with a slotted PVC pipe that meets the slot dimensions provided in Table PPS-2 will eliminate the need for an aggregate layer wrapped geotextile fabric.

### Design Opportunity

Pollutant removal occurs in the filter material layer of the section. The basic permeable pavement section may be considered with other wearing courses to provide water quality as long as:

- the filter layer is included in the section,
- the wearing course provides adequate permeability, and
- the new section does not introduce new pollutants to the runoff.



**Table PPS-1. Gradation Specifications for Class C Filter Material** (Source: CDOT Table 703-7)

Sieve Size	Mass Percent Passing Square Mesh Sieves
19.0 mm (3/4")	100
4.75 mm (No. 4)	60 – 100
300 µm (No. 50)	10 – 30
150 µm (No. 100)	0 – 10
75 µm (No. 200)	0 - 3

**Table PPS-2. Dimensions for Slotted Pipe**

Pipe Diameter	Slot Length <sup>1</sup>	Maximum Slot Width	Slot Centers <sup>1</sup>	Open Area <sup>1</sup> (per foot)
4"	1-1/16"	0.032"	0.413"	1.90 in <sup>2</sup>
6"	1-3/8"	0.032"	0.516"	1.98 in <sup>2</sup>

<sup>1</sup> Some variation in these values is acceptable and is expected from various pipe manufacturers. Be aware that both increased slot length and decreased slot centers will be beneficial to hydraulics but detrimental to the structure of the pipe.

Compact the filter layer using a vibratory drum roller or plate. The top of each layer below the leveling course must be uniform and should not deviate more than a ½ inch when a 10-foot straight edge is laid on its surface. The top of the leveling course should not deviate more than 3/8 inch in 10 feet.

- Impermeable Geomembrane Liner and Geotextile Separator Fabric:** For no-infiltration sections, install a 30 mil (minimum) PVC geomembrane liner, per Table PPS-4, on the bottom and sides of the basin, extending up at least to the top of the filter layer. Provide at least 9 inches (12 inches if possible) of cover over the membrane where it is attached to the wall to protect the membrane from UV deterioration. The geomembrane should be field-seamed using a dual track welder, which allows for non-destructive testing of almost all field seams. A small amount of single track and/or adhesive seaming should be allowed in limited areas to seam around pipe perforations, to patch seams removed for destructive seam testing, and for limited repairs. The liner should be installed with slack to prevent tearing due to backfill, compaction, and settling. Place CDOT Class B geotextile separator fabric, per Table PPS-3, above the geomembrane to protect it from being punctured during the placement of the filter material above the liner. If the subgrade contains angular rocks or other material that could puncture the geomembrane, smooth-roll the surface to create a suitable surface. If smooth-rolling the surface does not provide a suitable surface, also place the separator fabric between the geomembrane and the underlying subgrade. This should only be done when necessary because fabric placed under the geomembrane can increase seepage losses through pinholes or other geomembrane defects. Connect the geomembrane to perimeter concrete walls around the basin perimeter, creating a watertight seal between the geomembrane and the walls using a continuous batten bar and anchor connection (see Figure PPS-5). Where the need for the impermeable

membrane is not as critical, the membrane can be attached with a nitrile-based vinyl adhesive. Use watertight PVC boots for underdrain pipe penetrations through the liner (see Figure PPS-4).

**Table PPS-3. Physical Requirements for Separator Fabric<sup>1</sup>**

Property	Class B		Test Method
	Elongation < 50% <sup>2</sup>	Elongation > 50% <sup>2</sup>	
Grab Strength, N (lbs)	800 (180)	510 (115)	ASTM D 4632
Puncture Resistance, N (lbs)	310 (70)	180 (40)	ASTM D 4833
Trapezoidal Tear Strength, N (lbs)	310 (70)	180 (40)	ASTM D 4533
Apparent Opening Size, mm (US Sieve Size)	AOS < 0.3mm (US Sieve Size No. 50)		ASTM D 4751
Permittivity, sec <sup>-1</sup>	0.02 default value, must also be greater than that of soil		ASTM D 4491
Permeability, cm/sec	k fabric > k soil for all classes		ASTM D 4491
Ultraviolet Degradation at 500 hours	50% strength retained for all classes		ASTM D 4355

<sup>1</sup> Strength values are in the weaker principle direction

<sup>2</sup> As measured in accordance with ASTM D 4632

**Table PPS-4. Physical Requirements for Geomembrane**

Property	Thickness 0.76 mm (30 mil)	Test Method
Thickness, % Tolerance	±5	ASTM D 1593
Tensile Strength, kN/m (lbs/in) width	12.25 (70)	ASTM D 882, Method B
Modulus at 100% Elongation, kN/m (lbs/in)	5.25 (30)	ASTM D 882, Method B
Ultimate Elongation, %	350	ASTM D 882, Method A
Tear Resistance, N (lbs)	38 (8.5)	ASTM D 1004
Low Temperature Impact, °C (°F)	-29 (-20)	ASTM D 1790
Volatile loss, % max.	0.7	ASTM D 1203, Method A
Pinholes, No. Per 8 m <sup>2</sup> (No. per 10 sq. yds.) max.	1	N/A
Bonded Seam Strength, % of tensile strength	80	N/A

- Outlet:** The portion of the WQCV in each cell should be slowly released to drain in approximately 12 hours. An orifice at the outlet of the underdrain can be used for each cell to provide detention and slow release of the WQCV to offset hydromodification. Use a minimum orifice size of 3/8 inch to avoid clogging. If lateral walls are required, each cell should be considered a separate system and be

controlled independently. See Figure PPS-6 for underdrain system layout and outlet details showing a multi-cell configuration. Equations PPS-4 and PPS-5 can be used to determine the depth of the WQCV within the pavement section (based either on the stepped/flat installation shown in Figure PPS-2 or the sloped installation shown in Figure PPS-3) and Equation PPS-6 can be used to size the WQCV orifice. If the design includes multiple cells, these calculations should be performed for each cell substituting WQCV and  $V_{\text{Total}}$  with the volumes provided in each cell. The UD-BMP workbook available at [www.udfcd.org](http://www.udfcd.org) can be used when multiple cells are similar in area. The workbook assumes that the WQCV is distributed evenly between each cell.

For calculating depth of the WQCV using a flat/stepped installation, see Figure PPS-2:

$$d = \frac{12 \text{ WQCV}}{PA} \quad \text{Equation PPS-4}$$

Where:

$d$  = depth of WQCV storage in the reservoir (in)

$P$  = porosity,  $\leq 0.30$  for porous gravel,  $\leq 0.4$  for all other pavements using AASHTO No. 57 or No. 67 coarse aggregate in the reservoir

$A$  = area of permeable pavement system ( $\text{ft}^2$ )

WQCV = water quality capture volume ( $\text{ft}^3$ )

For calculating depth of the WQCV using a sloped installation, see Figure PPS-3:

$$d = 6 \left[ \frac{2 \text{ WQCV}}{PA} \right] + sL \quad \text{Equation PPS-5}$$

Where:

$d$  = depth of WQCV storage in the reservoir (in)

$A$  = area of permeable pavement system ( $\text{ft}^2$ )

$s$  = slope of the reservoir/subgrade interface (ft/ft)

$L$  = length between lateral flow barriers (see step 4) (ft)

For calculating the diameter of the orifice for a 12-hour drain time (Use a minimum orifice size of 3/8 inch to avoid clogging.):

$$D_{12 \text{ hour drain time}} = \sqrt{\frac{V}{1414 y^{0.41}}} \quad \text{Equation PPS-6}$$

Where:

$D$  = diameter of the orifice to drain a volume in 12 hours (in)

$Y$  = distance from the lowest elevation of the storage volume (i.e. the bottom of the reservoir) to the center of the orifice (ft)

$V$  = volume (WQCV or the portion of the WQCV in the cell) to drain in 12 hours (ft<sup>3</sup>)

## Additional Design Considerations

### Subgrade Preparation


**Partial Infiltration and Full Infiltration Installations:** The subgrade should be stripped of topsoil or other organics and either excavated or filled to the final subgrade level. Unnecessary compaction or over-compaction will reduce the subgrade infiltration rate. However, a soft or loosely compacted subgrade will settle, adversely impacting the performance of the entire permeable pavement system. The following recommendations for subgrade preparation are intended to strike a balance between those competing objectives:

- For sites, or portions thereof, requiring excavation to the final subgrade level, compaction of the subgrade may not be needed, provided that loose materials are removed from the excavation, and a firm subgrade is provided for the support of the pavement system. A geotechnical engineer should observe the prepared subgrade. Local soft areas should be excavated and replaced with properly compacted fill. As an alternative to excavating and replacing material, stabilization consisting of geogrid and compacted granular fill material can be used to bridge over the soft area. Fill material should be free draining and have a hydraulic conductivity significantly higher than the subgrade soil. Fill is typically compacted to a level equivalent to 95% Standard Proctor compaction (ASTM D 698). The designer should specify the level of compaction required to support the pavement system.
- For sites (or portions thereof), requiring placement of fill above the existing subgrade to reach the final subgrade level, the fill should be properly compacted. Specify the hydraulic conductivity for the material that is to be placed. This should be at least one order of magnitude higher than the native material. If the type or level of compaction of fill material available for construction is different than that considered in design, additional testing should be performed to substantiate that the design infiltration rate can be met. However, additional infiltrometer testing may not be necessary, provided that it can be demonstrated by other means that the compacted fill material is more permeable than that considered for design.
- Low ground pressure (LGP) track equipment should be used within the pavement area to limit over-compacting the subgrade. Wheel loads should not be allowed.

**No-Infiltration Sections:** Unless otherwise indicated by the geotechnical engineer, the subgrade for this section should be scarified and properly compacted to support the liner and pavement system. A level of compaction equivalent to 95% of the Standard Proctor density (ASTM D 698) is typically used. The designer should specify the level of compaction. No-infiltration sections should be smooth rolled with a roller compactor, and the prepared subgrade surface should be free of sharp objects that could puncture the liner. Both the designer and the liner installer should inspect the subgrade for acceptance prior to liner placement.

## Filter and Reservoir Layer Compaction

Filter material placed above the prepared subgrade should be compacted to a relative density between 70% and 75% (ASTM D4253 and ASTM D4254) using a walk-behind vibratory roller, vibratory plate compactor or other light compaction equipment. Do not over-compact; this will limit unnecessary infiltration into the underlying subgrade. The reservoir layer may not be testable for compaction using a method based on specified density (e.g., nuclear density testing). The designer should consider a method specification (e.g., number of passes of a specified vibratory compactor) for those materials. The number of passes appropriate is dependent on the type of equipment and depth of the layer.

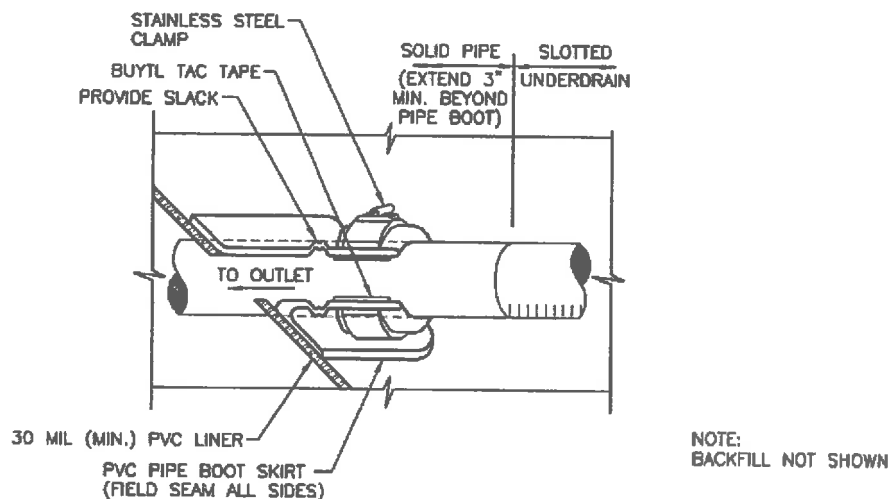

**Figure PPS-4. Geomembrane Liner/Underdrain Penetration Detail**

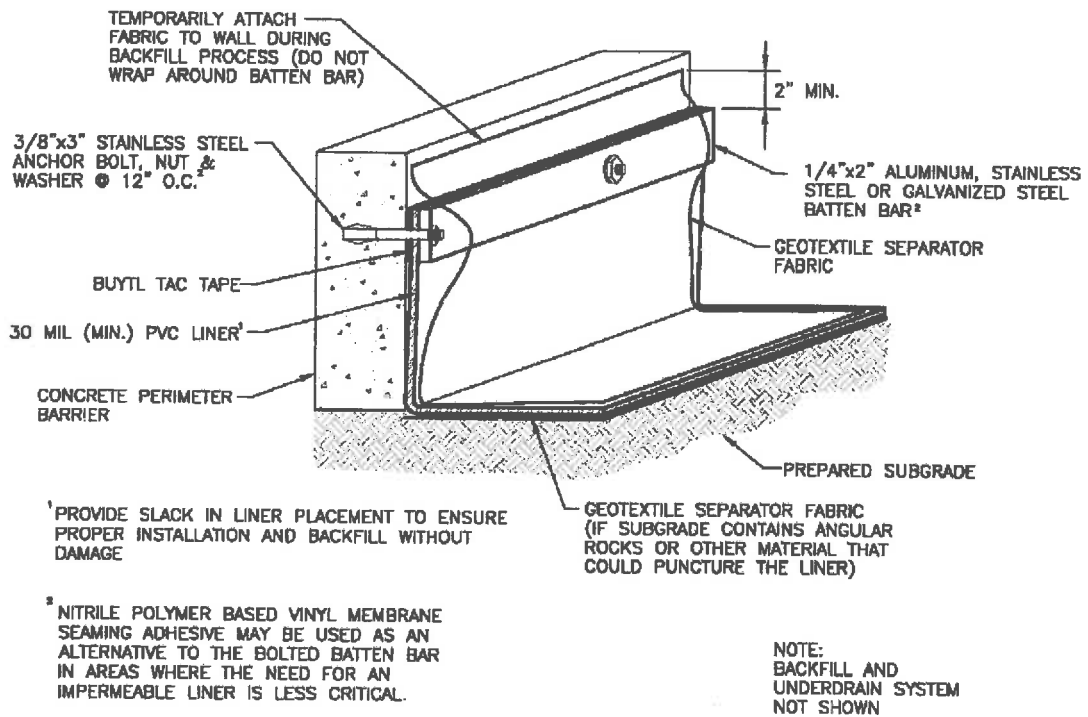


Figure PPS-5. Geomembrane Liner/Concrete Connection Detail

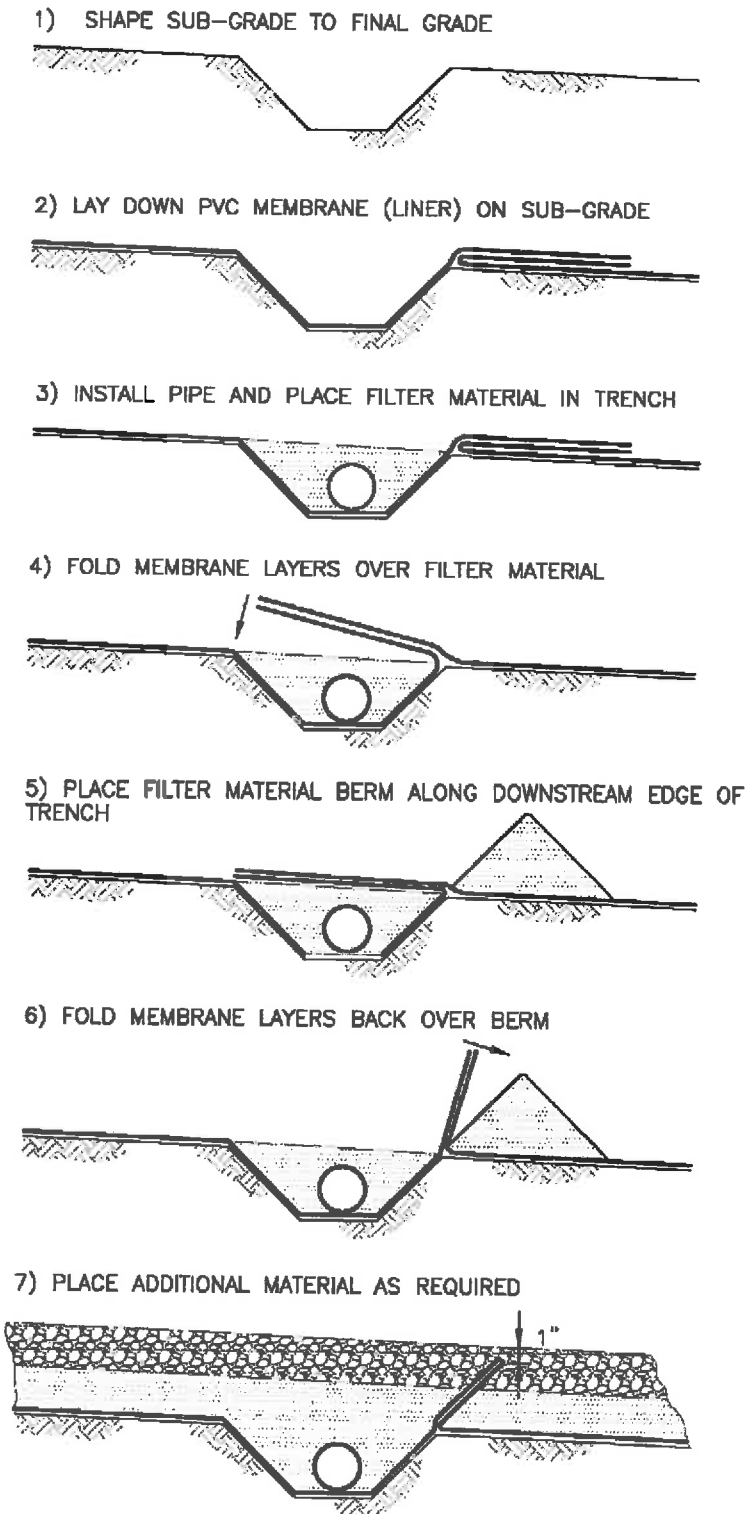


Figure PPS-6. Lateral Barrier Installation



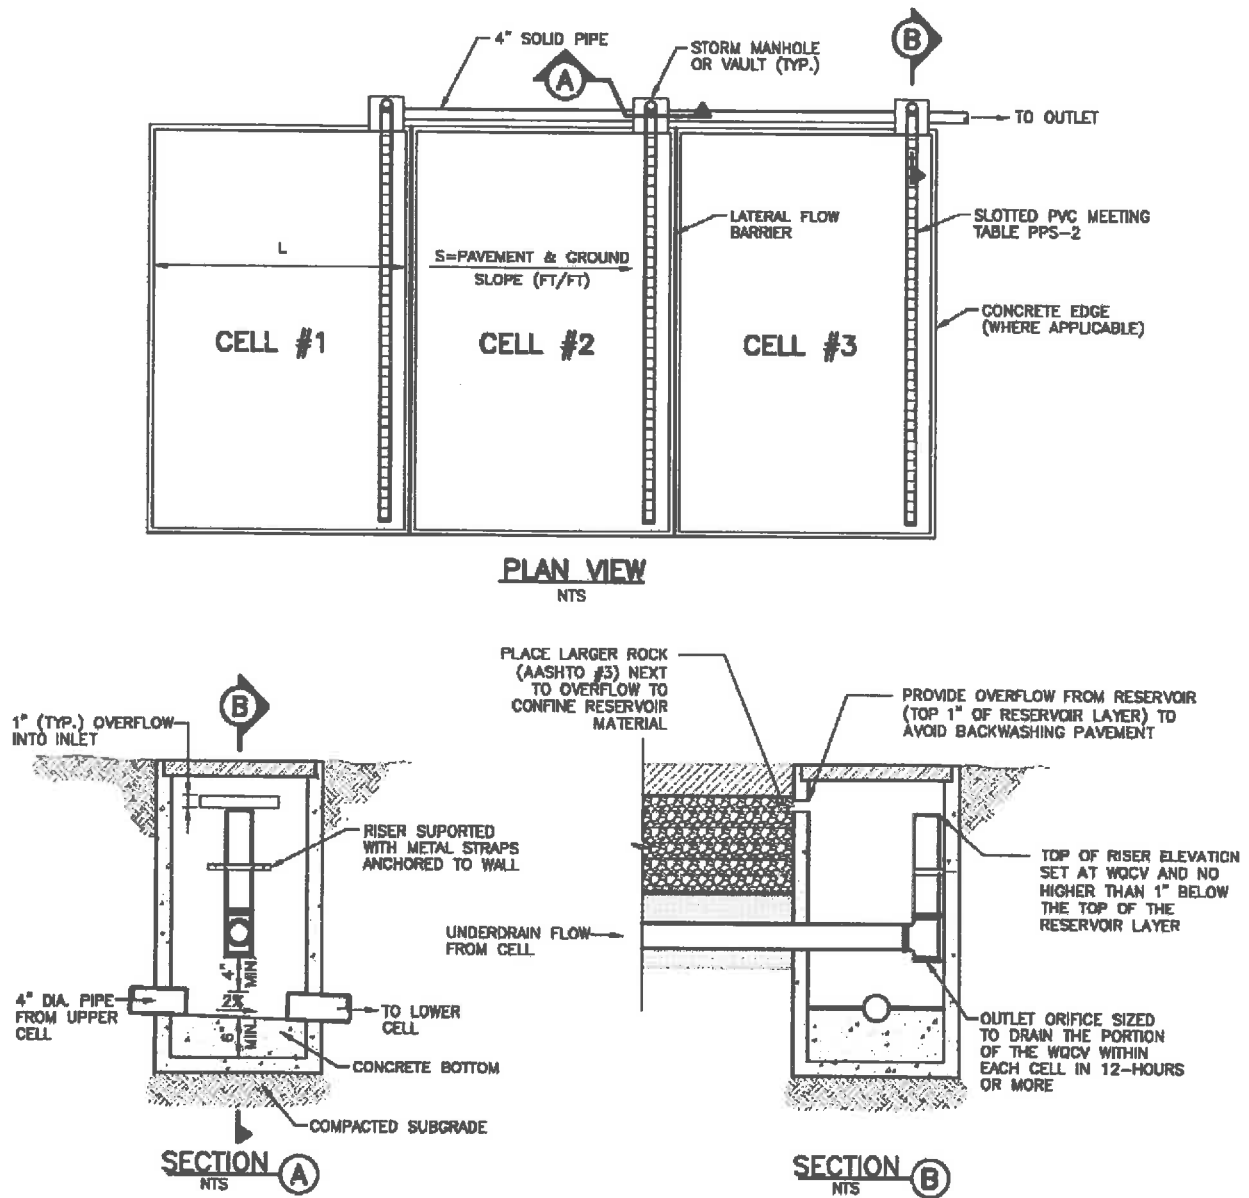


Figure PPS-7. Underdrain System Layout and Outlet Details



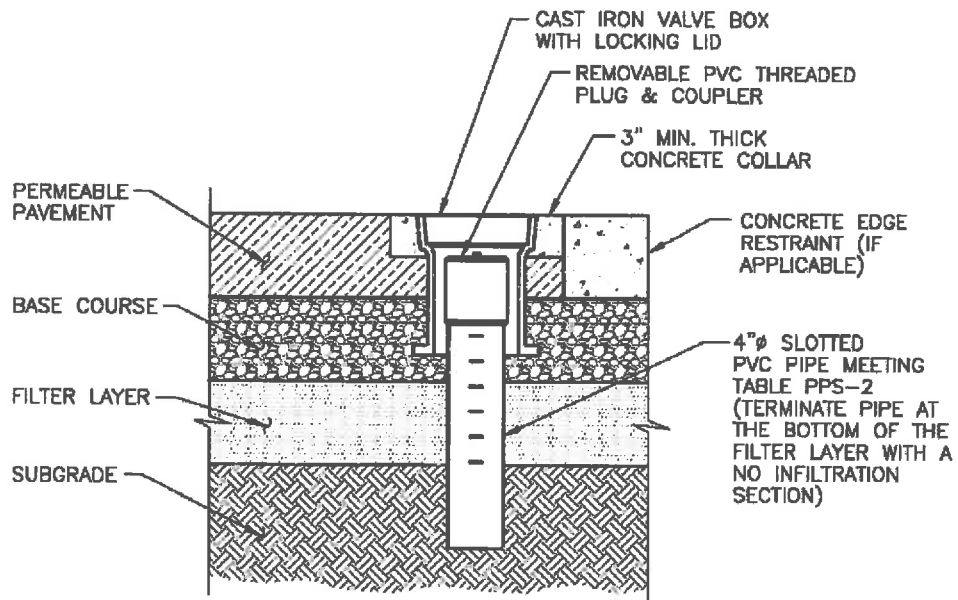

**SECTION**

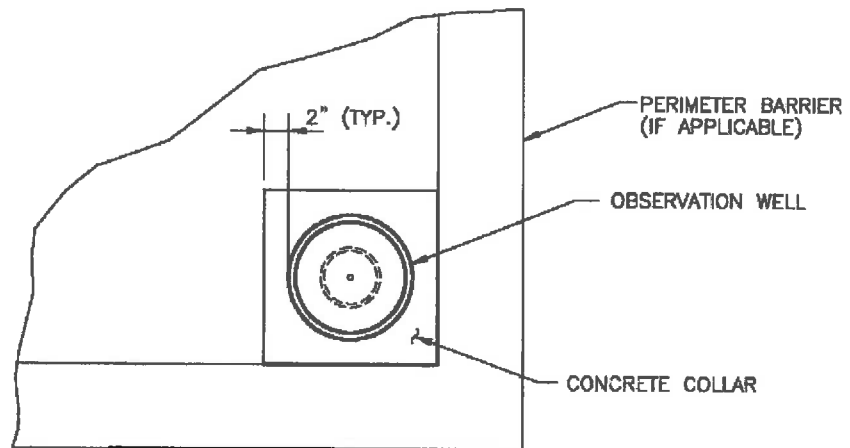

**PLAN**

**Figure PPS-8. Observation Well**

## Construction Considerations

Proper construction of permeable pavement systems requires measures to preserve natural infiltration rates (for full and partial infiltration sections) prior to placement of the pavement, as well as measures to protect the system from the time that pavement construction is complete to the end of site construction. Supplemental Fact Sheets on the specific pavements provide additional construction considerations. The following recommendations apply to all permeable pavement systems:

- When using an impermeable liner, ensure enough slack in the liner to allow for backfill, compaction, and settling without tearing the liner.
- Provide necessary quality assurance and quality control (QA/QC) when constructing an impermeable geomembrane liner system, including, but not limited to fabrication testing, destructive and non-destructive testing of field seams, observation of geomembrane material for tears or other defects, and air lace testing for leaks in all field seams and penetrations. QA/QC should be overseen by a professional engineer. Consider requiring field reports or other documentation from the engineer.
- Keep mud and sediment-laden runoff away from the pavement area.
- Temporarily divert runoff or install sediment control measures as necessary to reduce the amount of sediment run-on to the pavement.
- Cover surfaces with a heavy impermeable membrane when construction activities threaten to deposit sediment onto the pavement area.

## Design Example

The *UD-BMP* workbook, designed as a tool for both designer and reviewing agency is available at [www.udfcd.org](http://www.udfcd.org). This section provides a completed design form from this workbook as an example.

## **HYDRAULIC CALCULATIONS**

**LOT 35 CLAREMONT BUSINESS PARK FIL. NO. 2**  
**FINAL DRAINAGE REPORT DRAINAGE CALCULATIONS**  
*(Area Runoff Coefficient Summary)*

BASIN	TOTAL AREA		DEVELOPED				UNDEVELOPED			WEIGHTED	
	AREA (Sq Ft)	AREA (Acres)	AREA (Acres)	C <sub>5</sub>	C <sub>100</sub>	AREA (Acres)	C <sub>5</sub>	C <sub>100</sub>	C <sub>5</sub>	C <sub>100</sub>	
<i>A</i>	16000	0.37	0.32	0.90	0.96	0.05	0.15	0.20	0.80	0.86	
<i>B</i>	2500	0.06	0.03	0.90	0.96	0.02	0.15	0.20	0.52	0.57	

**LOT 35 CLAREMONT BUSINESS PARK FIL. NO. 2**  
**FINAL DRAINAGE REPORT DRAINAGE CALCULATIONS**  
**(Area Drainage Summary)**

From Area Runoff Coefficient Summary			OVERLAND			STREET / CHANNEL FLOW			Time of Travel		INTENSITY *		TOTAL FLOWS			
BASIN	AREA TOTAL (Acres)	C <sub>5</sub>	C <sub>100</sub>	Length (ft)	Height (ft)	T <sub>c</sub> (min)	Length (ft)	Slope (%)	Velocity (fps)	T <sub>t</sub> (min)	TOTAL (min)	CHECK (min)	I <sub>5</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>5</sub> (c.f.s.)	Q <sub>100</sub> (c.f.s.)
<b>Proposed Area Drainage Summary</b>																
A	0.37	0.80	0.86	10	1	0.8	146	2.4%	5.4	0.5	5.0	10.9	5.2	8.7	1.5	2.8
B	0.06	0.52	0.57	10	1	1.5	52	1.6%	4.4	0.2	5.0	10.5	5.2	8.7	0.2	0.3

Calculated by: GW  
 Date: 10/28/2017  
 Checked by: VAS

## Design Procedure Form: Permeable Pavement Systems (PPS)

UD-BMP (Version 3.06, November 2016)

Sheet 1 of 2

Designer: GW  
 Company: M&S Civil Consultants  
 Date: October 28, 2017  
 Project: Lot 35 - Claremont Business Park  
 Location: 7259 Cole View

<p><b>1. Type of Permeable Pavement Section</b></p> <p>A) What type of section of permeable pavement is used? (Based on the land use and activities, proximity to adjacent structures and soil characteristics.)</p> <p>B) What type of wearing course?</p>	<p>Choose One</p> <p><input type="radio"/> No Infiltration</p> <p><input type="radio"/> Partial Infiltration Section</p> <p><input checked="" type="radio"/> Full Infiltration Section</p> <hr/> <p>Choose One</p> <p><input checked="" type="radio"/> PICP</p> <p><input type="radio"/> Concrete Grid Pavement</p> <p><input type="radio"/> Pervious Concrete</p> <p><input type="radio"/> Porous Gravel</p>
<p><b>2. Required Storage Volume</b></p> <p>A) Effective Imperviousness of Area Tributary to Permeable Pavement, <math>I_e</math></p> <p>B) Tributary Area's imperviousness Ratio (<math>I = I_e / 100</math>)</p> <p>C) Tributary Watershed Area (Including area of permeable pavement system)</p> <p>D) Area of Permeable Pavement System (Minimum recommended permeable pavement area = 4966 sq ft)</p> <p>E) Impervious Tributary Ratio (Contributing Impervious Area / Permeable Pavement Ratio)</p> <p>F) Water Quality Capture Volume (WQCV) Based on 12-hour Drain Time (<math>WQCV = (0.8 * (0.91 * i^2 - 1.19 * i^2 + 0.78 * i) / 12) * \text{Area}</math>)</p> <p>G) Is flood control volume being added?</p> <p>H) Total Volume Needed</p>	<p><math>I_e =</math> <u>90.0</u> %</p> <p><math>I =</math> <u>0.900</u></p> <p><math>A_{\text{Total}} =</math> <u>16,000</u> sq ft</p> <p><math>A_{\text{PPS}} =</math> <u>750</u> sq ft</p> <p><math>R_T =</math> <u>18.3</u></p> <p style="color: red; font-weight: bold;">IMPERVIOUS TRIBUTARY RATIO EXCEEDS 2.0</p> <p style="color: blue; font-weight: bold;">A 6" CONCRETE CURB SHALL ENCLOSE AROUND THE PERMEABLE PAVER'S EDGE</p> <p>WQCV = <u>428</u> cu ft</p> <p>Choose One</p> <p><input type="radio"/> YES</p> <p><input checked="" type="radio"/> NO</p> <p><math>V_{\text{Total}} =</math> _____ cu ft</p>
<p><b>3. Depth of Reservoir</b></p> <p>A) Minimum Depth of Reservoir (Minimum recommended depth is 6 inches)</p> <p>B) Is the slope of the reservoir/subgrade interface equal to 0%?</p> <p>C) Porosity (Porous Gravel Pavement <math>\leq 0.3</math>, Others <math>\leq 0.40</math>)</p> <p>D) Slope of the Base Course/Subgrade Interface</p> <p>E) Length Between Lateral Flow Barriers</p> <p>F) Volume Provided Based on Depth of Base Course Flat or Stepped: <math>V = P * ((D_{\text{min}}) / 12) * \text{Area}</math> Sloped: <math>V = P * [(D_{\text{min}} - (D_{\text{min}} - 6 * SL - 1)) / 12] * \text{Area}</math></p>	<p><math>D_{\text{min}} =</math> <u>24.0</u> inches</p> <p>Choose One</p> <p><input checked="" type="radio"/> YES- Flat or Stepped Installation</p> <p><input type="radio"/> NO- Sloped Installation</p> <p><math>P =</math> <u>0.30</u></p> <p><math>S =</math> _____ ft / ft</p> <p><math>L =</math> _____ ft</p> <p><math>V =</math> <u>431</u> cu ft</p>
<p><b>4. Lateral Flow Barriers</b></p> <p>A) Type of Lateral Flow Barriers</p> <p>B) Number of Permeable Pavement Cells</p>	<p>Choose One</p> <p><input type="radio"/> Concrete Walls</p> <p><input type="radio"/> PVC geomembrane installed normal to flow</p> <p><input checked="" type="radio"/> N/A- Flat installation</p> <p><input type="radio"/> Other (Describe):</p> <hr/> <hr/> <hr/> <p>Cells = _____</p>
<p><b>5. Perimeter Barrier</b></p> <p>A) Is a perimeter barrier provided on all sides of the pavement system? (Recommended for PICP, concrete grid pavement, or for any no-infiltration section.)</p>	<p>Choose One</p> <p><input type="radio"/> YES</p> <p><input checked="" type="radio"/> NO</p>

**Design Procedure Form: Permeable Pavement Systems (PPS)**

Sheet 2 of 2

**Designer:** GW  
**Company:** M&S Civil Consultants  
**Date:** October 28, 2017  
**Project:** Lot 35 - Claremont Business Park  
**Location:** 7287 Cole View

<p><b>C. Filter Material and Underdrain System</b></p> <p>A) Is the underdrain placed below a 6-inch thick layer of CDOT Class C filter material?</p> <p>B) Diameter of Slotted Pipe (slot dimensions per Table PPS-77)</p> <p>C) Distance from the Lowest Elevation of the Storage Volume (i.e. the bottom of the base course to the center of the orifice)</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Choose One</p> <p><input type="radio"/> YES</p> <p><input type="radio"/> NO</p> <p><input checked="" type="radio"/> N/A</p> </div> <div style="border: 1px solid black; padding: 5px;"> <p>Choose One</p> <p><input type="radio"/> 4-inch</p> <p><input type="radio"/> 6-inch</p> </div> <p style="text-align: right;">_____ ft</p>
<p><b>D. Impermeable Geomembrane Liner and Flexible Separator Fabric</b></p> <p>A) Is there a minimum 30 mil thick impermeable PVC geomembrane liner on the bottom and sides of the basin, extending up to the top of the base course?</p> <p>B) CDOT Class B Separator Fabric</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Choose One</p> <p><input type="radio"/> YES</p> <p><input checked="" type="radio"/> NO</p> </div> <div style="border: 1px solid black; padding: 5px;"> <p>Choose One</p> <p><input type="radio"/> Placed above the liner</p> <p><input type="radio"/> Placed above and below the liner</p> </div>
<p><b>E. Orifice</b> (Assumes each cell has similar area, single slope, and length between lateral barriers (unless subgrade is flat). Calculate cells individually where this varies.)</p> <p>A) Depth of WDCM in the Reservoir (Elevation of the Flood Control Outlet)</p> <p>B) Diameter of Orifice for 12-hour Drain Time (Use a minimum orifice diameter of 3/8-inch)</p>	<p>Depth = _____ inches</p> <p>D<sub>orifice</sub> = _____ inches</p>
<p><b>Notes:</b> _____</p> <p>_____</p> <p>_____</p> <p>_____</p>	



6825 Silver Ponds Heights #101  
Colorado Springs, CO 80908  
(719) 481-4560

---

**PERCOLATION TEST**

**FOR**

**HAMMERS CONSTRUCTION**

**JOB #16-0787**

Lot 11, Filing 2,  
Claremont Business Park Subdivision,  
7176 Cole View,  
El Paso County,  
Colorado

Respectfully submitted,

Charles E. Milligan, P.E.  
Civil Engineer





## PERCOLATION TEST FINDINGS

Enclosed are the results of the percolation test for the retention pond to be installed at Lot 11, Filing 2, Claremont Business Park Subdivision, 7176 Cole View, El Paso County, Colorado. The locations of the percolation test borings were determined by Hammers Construction. The commercial structure will not be on a public water system. Due to the natural slope of the property, the entire system will feed to the west to northwest at 2% approximately 50 feet. All applicable regulations of the El Paso County Health Department ISDS Regulations must be complied with for the installation of the disposal system.

The percolation test was performed on October 6, 2016, in accordance with E.P.C.P.H. OWS Regulations. The field data and results of the percolation test are as follows:

PERC. TEST @ TIME	PERC HOLE #1 @ 34" DEPTH DROP (IN INCHES)	PERC HOLE #2 @ 34" DEPTH DROP (IN INCHES)	PERC HOLE #3 @ 34" DEPTH DROP (IN INCHES)
12:24	1-3/4	4-1/4	2
12:34	3/4	1-7/8	5/8
12:44	3/4	1	5/8
12:54	11/16	13/16	9/16
1:04	5/8	5/8	9/16
1:14	5/8	5/8	1/2
Rate/Hole	16.0	16.0	20.0

The average of the test holes is 17.3 minutes per inch.

Blow counts at the depth of 3 feet was 31/12.

The soil profile for the disposal system is as follows:

- 0 to 6" - Sand- fine to coarse grain, high density, low moisture content, low cohesion, low plasticity, brown in color.
- 6" to 8' - Sand- fine to coarse grain, moderate density, moderate moisture content, low clay content, low cohesion, low plasticity, brown in color.

No water was encountered during the drilling of all holes. Bedrock was not encountered during the drilling of the test borings. No known wells were observed within 100 feet of the proposed system. All setbacks shall conform to county regulations.

If during construction of the field itself, subsurface conditions change considerably or if the location of the proposed field changes, this office shall be notified to determine whether the conditions are adequate for the system as designed or whether a new system needs to be designed.

Weather conditions at the time of the test consisted of partly cloudy skies with cold temperatures.



# DRILL LOGS

JOB #: 16-0787

TEST BORING  
NO.: TH-1

DATE: 10/6/2016

JOB #:

TEST BORING  
NO.: TH-

DATE:

**0"-6' Sand (SM)**

Fine-coarse grained  
Moderate-high density  
Moderate moisture  
content  
Low-moderate clay  
content  
Low plasticity  
Light Brown color

**6'-8' Sand (SC)**

Fine-coarse grained  
Moderate-high density  
Moderate-high moisture  
content  
Low-moderate clay  
content  
Low-moderate plasticity  
Greysih Brown color

DEPTH (in ft.)	SYMBOL	SAMPLES	BLOW COUNT	WATER %	SOIL TYPE
1					
2					
3			31 12"	7.0	SM
4					
5					
6					
7					
8			Bag 2"	11.2	SC
9					
10					

DEPTH (in ft.)

SYMBOL

SAMPLES

BLOW COUNT


WATER %

SOIL TYPE

DEPTH (in ft.)	SYMBOL	SAMPLES	BLOW COUNT	WATER %	SOIL TYPE
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

**SITE MAP**

Lot 11, Filing 2  
Claremont Business Park  
7176 Cole View  
El Paso County,  
Colorado  
Job #16-0787

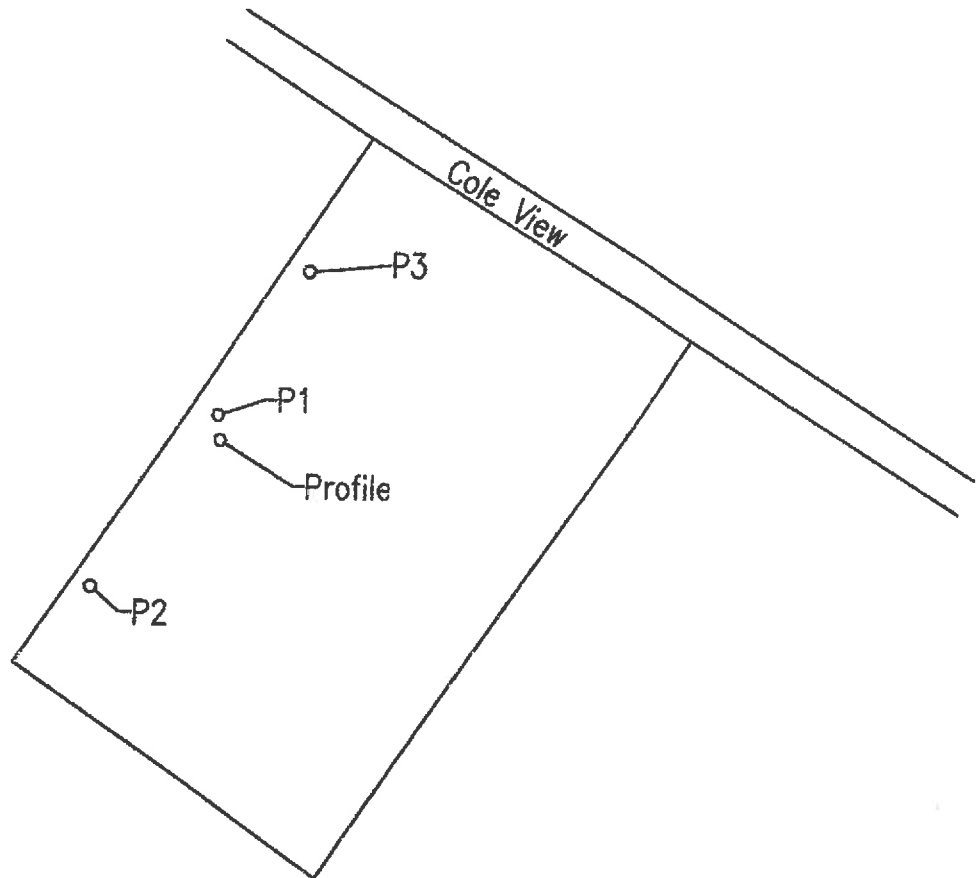

Location from Southwest Lot Corner to Profile:

N. 41° E. - 78'

Location from Profile to:

P1: S. 78° E. - 3'


P2: S. 32° W. - 54'

P3: N. 35° E. - 45'


GPS coordinates:

N. 38° 50' 55.05"

W. 104° 41' 22.66"




# GEOQUEST LLC GRADATION TEST RESULTS

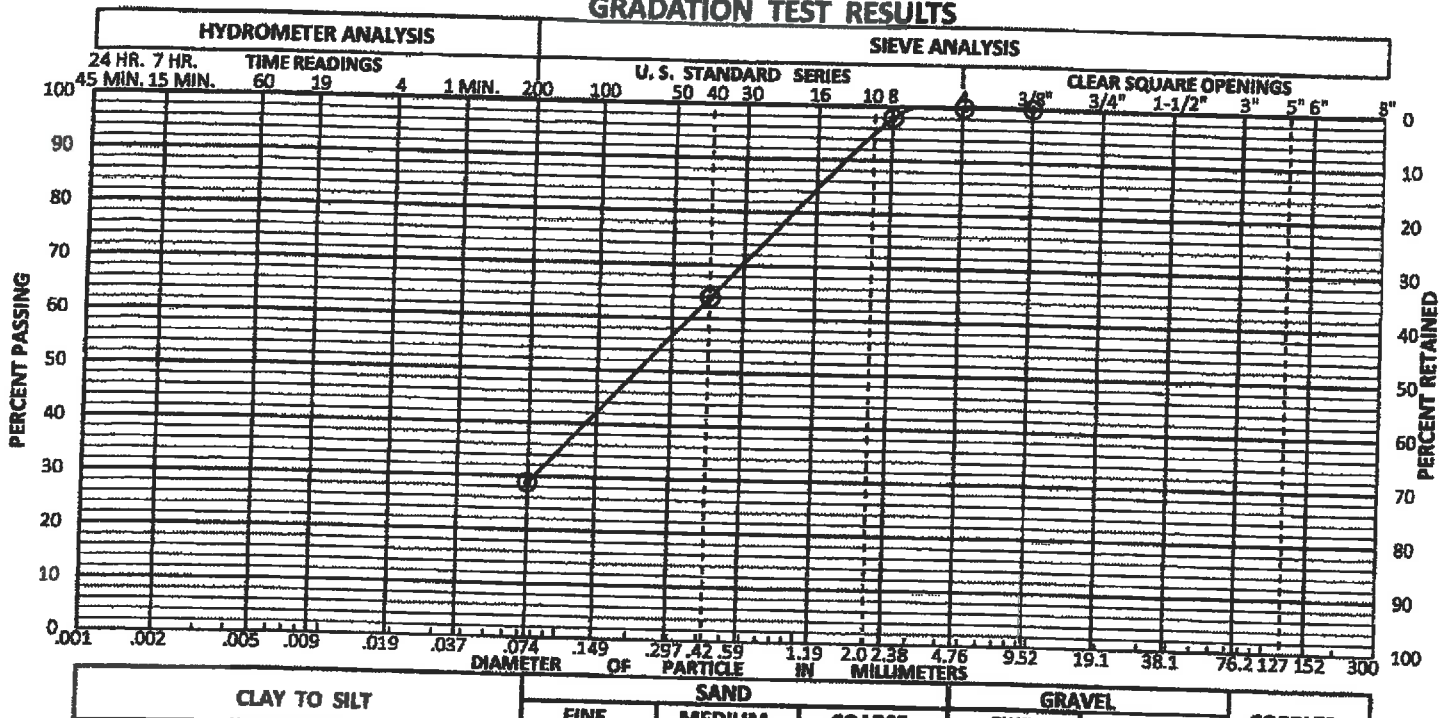

**CLASSIFICATION SM**  
 GRAVEL 0.0 %  
 SAND 71.2 %  
 FINES 28.8 %  
 SAMPLE # 1 HOLE # TH-1 DEPTH 3 FEET

**NOTES: 7.0 % Moisture Content**  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

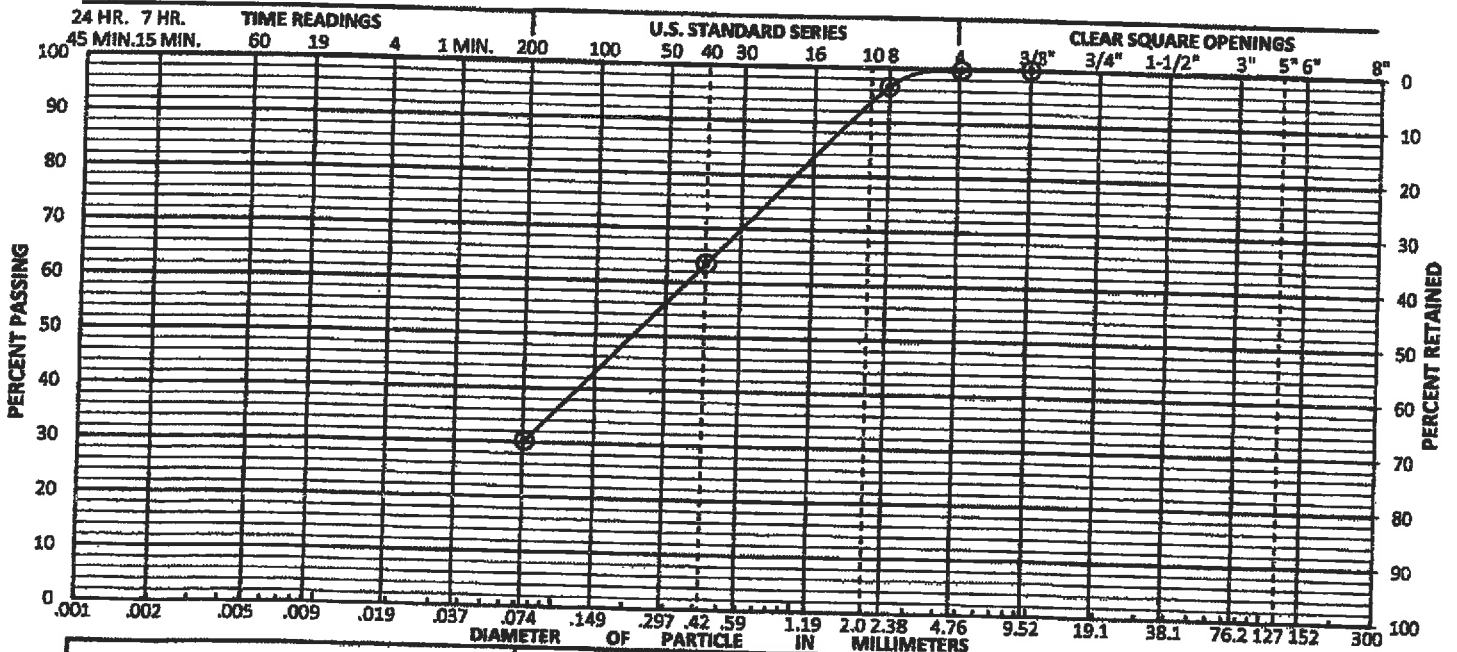

**CLASSIFICATION SC**  
 GRAVEL 0.2 %  
 SAND 69.5 %  
 FINES 30.3 %  
 SAMPLE # 1 HOLE # TH-1 DEPTH 8 FEET

**NOTES: 11.2% Moisture Content**  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 Job #: 16-0787 By: DM 10/6/2016

## **SOIL SURVEY**

All Ecological Sites -- Rangeland--El Paso County Area, Colorado



Soil Map may not be valid. © 2017 Esri

Map Scale: 1:485 if printed on A landscape (11" x 8.5") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84

















Natural Resources  
Conservation Service

Web Soil Survey  
National Cooperative Soil Survey



## MAP LEGEND

- Area of Interest (AOI)**
  -  Area of Interest (AOI)
- Soils**
  - Soil Rating Polygons**
    -  R069XY031CO
    -  Not rated or not available
  - Soil Rating Lines**
    -  R069XY031CO
    -  Not rated or not available
  - Soil Rating Points**
    -  R069XY031CO
    -  Not rated or not available
- Water Features**
  -  Streams and Canals
- Transportation**
  -  Rails
  -  Interstate Highways
  -  US Routes
  -  Major Roads
  -  Local Roads
- Background**
  -  Aerial Photography

## MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

**Warning:** Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL:  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado  
 Survey Area Data: Version 14, Sep 23, 2016

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 3, 2014—Jun 17, 2014

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## All Ecological Sites — Rangeland

Map unit symbol	Map unit name	Component name (percent)	Ecological site	Acres in AOI	Percent of AOI
28	Ellicott loamy coarse sand, 0 to 5 percent slopes	Ellicott (85%) Fluvaquentic haplaquoll Other soils Pleasant	R069XY031CO — Sandy Bottomland LRU's A & B	0.4	100.0%
<b>Totals for Area of Interest</b>				<b>0.4</b>	<b>100.0%</b>



## El Paso County Area, Colorado

### 28—Ellicott loamy coarse sand, 0 to 5 percent slopes

#### Map Unit Setting

*National map unit symbol:* 3680  
*Elevation:* 5,500 to 6,500 feet  
*Mean annual precipitation:* 13 to 15 inches  
*Mean annual air temperature:* 47 to 50 degrees F  
*Frost-free period:* 125 to 145 days  
*Farmland classification:* Not prime farmland

#### Map Unit Composition

*Ellicott and similar soils:* 85 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Ellicott

##### Setting

*Landform:* Flood plains, stream terraces  
*Landform position (three-dimensional):* Tread  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Sandy alluvium

##### Typical profile

*A - 0 to 4 inches:* loamy coarse sand  
*C - 4 to 60 inches:* stratified coarse sand to sandy loam

##### Properties and qualities

*Slope:* 0 to 5 percent  
*Depth to restrictive feature:* More than 80 inches  
*Natural drainage class:* Somewhat excessively drained  
*Runoff class:* Very low  
*Capacity of the most limiting layer to transmit water (Ksat):* High to very high (5.95 to 19.98 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* Frequent  
*Frequency of ponding:* None  
*Available water storage in profile:* Low (about 4.1 inches)

##### Interpretive groups

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 7w  
*Hydrologic Soil Group:* A  
*Ecological site:* Sandy Bottomland LRU's A & B (R069XY031CO)  
*Other vegetative classification:* SANDY BOTTOMLAND (069AY031CO)  
*Hydric soil rating:* No

#### Minor Components

##### Fluvaquentic haplaquoll

*Percent of map unit:*  
*Landform:* Swales  
*Hydric soil rating:* Yes

**Other soils**

*Percent of map unit:*  
*Hydric soil rating: No*

**Pleasant**

*Percent of map unit:*  
*Landform: Depressions*  
*Hydric soil rating: Yes*

**FEMA MAP / LOMR**



# Federal Emergency Management Agency

Washington, D.C. 20472

**NOV 13 2006**

CERTIFIED MAIL  
RETURN RECEIPT REQUESTED

The Honorable Sallie Clark  
Chair, El Paso County  
Board of Commissioners  
27 East Vermijo Avenue  
Colorado Springs, CO 80903

IN REPLY REFER TO:

Case No.: 06-08-B137P  
Follows Conditional  
Case No.: 04-08-0469R  
Community Name: El Paso County, CO  
Community No.: 080059  
Effective Date of  
This Revision: **DEC 13 2006**

Dear Ms. Clark:

The Flood Insurance Study Report and Flood Insurance Rate Map for your community have been revised by this Letter of Map Revision (LOMR). Please use the enclosed annotated map panel(s) revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals issued in your community.

Additional documents are enclosed which provide information regarding this LOMR. Please see the List of Enclosures below to determine which documents are included. Other attachments specific to this request may be included as referenced in the Determination Document. If you have any questions regarding floodplain management regulations for your community or the National Flood Insurance Program (NFIP) in general, please contact the Consultation Coordination Officer for your community. If you have any technical questions regarding this LOMR, please contact the Director, Federal Insurance and Mitigation Division of the Department of Homeland Security's Federal Emergency Management Agency (FEMA) in Denver, Colorado, at (303) 235-4830, or the FEMA Map Assistance Center, toll free, at 1-877-336-2627 (1-877-FEMA MAP). Additional information about the NFIP is available on our website at <http://www.fema.gov/nfip>.

Sincerely,

Kevin C. Long, CFM, Project Engineer  
Engineering Management Section  
Mitigation Division

For: William R. Blanton Jr., CFM, Chief  
Engineering Management Section  
Mitigation Division

List of Enclosures:

Letter of Map Revision Determination Document  
Annotated Flood Insurance Rate Map  
Annotated Flood Insurance Study Report

cc: Mr. Kevin Stilson, P.E., CFM  
Regional Floodplain Administrator

██████████  
Central Marksheffel Business District

██████████  
Matrix Design Group



**Federal Emergency Management Agency**  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT**

COMMUNITY AND REVISION INFORMATION		PROJECT DESCRIPTION	BASIS OF REQUEST
COMMUNITY	El Paso County Colorado (Unincorporated Areas)	CHANNELIZATION	FLOODWAY HYDRAULIC ANALYSIS NEW TOPOGRAPHIC DATA
	COMMUNITY NO.: 080059		
IDENTIFIER	Marksheffel Business District	APPROXIMATE LATITUDE & LONGITUDE: 38.863, -104.674 SOURCE: USGS QUADRANGLE DATUM: NAD 27	
ANNOTATED MAPPING ENCLOSURES		ANNOTATED STUDY ENCLOSURES	
TYPE: FIRM*	NO.: 08041C0752F	DATE: March 17, 1997	
TYPE: FIRM*	NO.: 08041C0756F	DATE: March 17, 1997	
		DATE OF EFFECTIVE FLOOD INSURANCE STUDY: August 23, 1999 PROFILE: 212P FLOODWAY DATA TABLE 5	

Enclosures reflect changes to flooding sources affected by this revision.

\* FIRM - Flood Insurance Rate Map; \*\* FBFM - Flood Boundary and Floodway Map; \*\*\* FHBM - Flood Hazard Boundary Map

**FLOODING SOURCE(S) & REVISED REACH(ES)**

East Fork Sand Creek - from approximately 5,250 feet downstream to just upstream of Marksheffel Road

**SUMMARY OF REVISIONS**

Flooding Source	Effective Flooding	Revised Flooding	Increases	Decreases
East Fork Sand Creek	Floodway	Floodway	YES	YES
	Zone AE	Zone AE	YES	YES
	BFEs	BFEs	NONE	YES
	Zone X (Shaded)	Zone X (Unshaded)	NONE	YES

\* BFEs - Base Flood Elevations

**DETERMINATION**

This document provides the determination from the Department of Homeland Security's Federal Emergency Management Agency (FEMA) regarding a request for a Letter of Map Revision (LOMR) for the area described above. Using the information submitted, we have determined that a revision to the flood hazards depicted in the Flood Insurance Study (FIS) report and/or National Flood Insurance Program (NFIP) map is warranted. This document revises the effective NFIP map, as indicated in the attached documentation. Please use the enclosed annotated map panels revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals in your community.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at <http://www.fema.gov/nfip>.

*Kevin C. Long*  
Kevin C. Long, CFM, Project Engineer  
Engineering Management Section  
Mitigation Division



**Federal Emergency Management Agency**  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT (CONTINUED)**

**COMMUNITY INFORMATION**

**APPLICABLE NFIP REGULATIONS/COMMUNITY OBLIGATION**

We have made this determination pursuant to Section 206 of the Flood Disaster Protection Act of 1973 (P.L. 93-234) and in accordance with the National Flood Insurance Act of 1968, as amended (Title XIII of the Housing and Urban Development Act of 1968, P.L. 90-448), 42 U.S.C. 4001-4128, and 44 CFR Part 65. Pursuant to Section 1361 of the National Flood Insurance Act of 1968, as amended, communities participating in the NFIP are required to adopt and enforce floodplain management regulations that meet or exceed NFIP criteria. These criteria, including adoption of the FIS report and FIRM, and the modifications made by this LOMR, are the minimum requirements for continued NFIP participation and do not supersede more stringent State/Commonwealth or local requirements to which the regulations apply.

We provide the floodway designation to your community as a tool to regulate floodplain development. Therefore, the floodway revision we have described in this letter, while acceptable to us, must also be acceptable to your community and adopted by appropriate community action, as specified in Paragraph 60.3(d) of the NFIP regulations.

NFIP regulations Subparagraph 60.3(b)(7) requires communities to ensure that the flood-carrying capacity within the altered or relocated portion of any watercourse is maintained. This provision is incorporated into your community's existing floodplain management ordinances; therefore, responsibility for maintenance of the altered or relocated watercourse, including any related appurtenances such as bridges, culverts, and other drainage structures, rests with your community. We may request that your community submit a description and schedule of maintenance activities necessary to ensure this requirement.

**COMMUNITY REMINDERS**

We based this determination on the 1-percent-annual-chance flood discharges computed in the FIS for your community without considering subsequent changes in watershed characteristics that could increase flood discharges. Future development of projects upstream could cause increased flood discharges, which could cause increased flood hazards. A comprehensive restudy of your community's flood hazards would consider the cumulative effects of development on flood discharges subsequent to the publication of the FIS report for your community and could, therefore, establish greater flood hazards in this area.

Your community must regulate all proposed floodplain development and ensure that permits required by Federal and/or State/Commonwealth law have been obtained. State/Commonwealth or community officials, based on knowledge of local conditions and in the interest of safety, may set higher standards for construction or may limit development in floodplain areas. If your State/Commonwealth or community has adopted more restrictive or comprehensive floodplain management criteria, those criteria take precedence over the minimum NFIP requirements.

We will not print and distribute this LOMR to primary users, such as local insurance agents or mortgage lenders; instead, the community will serve as a repository for the new data. We encourage you to disseminate the information in this LOMR by preparing a news release for publication in your community's newspaper that describes the revision and explains how your community will provide the data and help interpret the NFIP maps. In that way, interested persons, such as property owners, insurance agents, and mortgage lenders, can benefit from the information.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at <http://www.fema.gov/nfip>.

*Kevin C. Long*  
Kevin C. Long, CFM, Project Engineer  
Engineering Management Section  
Mitigation Division



**Federal Emergency Management Agency**  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT (CONTINUED)**

We have designated a Consultation Coordination Officer (CCO) to assist your community. The CCO will be the primary liaison between your community and FEMA. For information regarding your CCO, please contact:

Ms. Jeanine D. Petterson  
Director, Federal Insurance and Mitigation Division  
Federal Emergency Management Agency, Region VIII  
Denver Federal Center, Building 710  
P.O. Box 25267  
Denver, CO 80225-0267  
(303) 235-4830

**STATUS OF THE COMMUNITY NFIP MAPS**

We will not physically revise and republish the FIRM and FIS report for your community to reflect the modifications made by this LOMR at this time. When changes to the previously cited FIRM panel(s) and FIS report warrant physical revision and republication in the future, we will incorporate the modifications made by this LOMR at that time.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-338-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3801 Eisenhower Avenue, Alexandria, VA 22304. Additional Information about the NFIP is available on our website at <http://www.fema.gov/nfip>.

*Kevin C. Long*

Kevin C. Long, CFM, Project Engineer  
Engineering Management Section  
Mitigation Division



**Federal Emergency Management Agency**  
Washington, D.C. 20472

**LETTER OF MAP REVISION  
DETERMINATION DOCUMENT (CONTINUED)**

**PUBLIC NOTIFICATION OF REVISION**

**PUBLIC NOTIFICATION**

FLOODING SOURCE	LOCATION OF REFERENCED ELEVATION	BFE (FEET NGVD 29)		MAP PANEL NUMBER(S)
		EFFECTIVE	REVISED	
East Fork Sand Creek	Approximately 5,150 feet downstream of Marksheffel Road	6,316	6,315	08041C0752F
	Approximately 210 feet downstream of Marksheffel Road	6,381	6,379	08041C0756F

Within 90 days of the second publication in the local newspaper, a citizen may request that we reconsider this determination. Any request for reconsideration must be based on scientific or technical data. This revision will become effective 30 days from the date of this letter. However, until the 90-day period has elapsed, the revised BFEs presented in this LOMR may be changed.

A notice of changes will be published in the *Federal Register*. This information also will be published in your local newspaper on or about the dates listed below.

LOCAL NEWSPAPER      Name: *El Paso County News*  
Dates: 11/29/2006 and 12/06/2006

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-338-2627 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at <http://www.fema.gov/nfip>.

*Kevin C. Long*

Kevin C. Long, CFM, Project Engineer  
Engineering Management Section  
Mitigation Division



**CHANGES ARE MADE IN DETERMINATIONS OF BASE FLOOD ELEVATIONS FOR THE UNINCORPORATED AREAS OF EL PASO COUNTY, COLORADO, UNDER THE NATIONAL FLOOD INSURANCE PROGRAM**

On March 17, 1997, the Department of Homeland Security's Federal Emergency Management Agency identified Special Flood Hazard Areas (SFHAs) in the unincorporated areas of El Paso County, Colorado, through issuance of a Flood Insurance Rate Map (FIRM). The Mitigation Division has determined that modification of the elevations of the flood having a 1-percent chance of being equaled or exceeded in any given year (base flood) for certain locations in this community is appropriate. The modified Base Flood Elevations (BFEs) revise the FIRM for the community.

The changes are being made pursuant to Section 206 of the Flood Disaster Protection Act of 1973 (Public Law 93-234) and are in accordance with the National Flood Insurance Act of 1968, as amended (Title XIII of the Housing and Urban Development Act of 1968, Public Law 90-448), 42 U.S.C. 4001-4128, and 44 CFR Part 65.

A hydraulic analysis was performed to incorporate the effects of channel improvements along Sand Creek East Fork from approximately 5,250 feet downstream to just upstream of Marksheffel Road, and has resulted in a revised delineation of the regulatory floodway, an increase in SFHA width, a decrease in SFHA width, and decreased BFEs for Sand Creek East Fork. The aforementioned channelized portion of Sand Creek East Fork contains the base flood. The table below indicates existing and modified BFEs for selected locations along the affected lengths of the flooding source(s) cited above.

Location	Existing BFE (feet)*	Modified BFE (feet)*
Sand Creek East Fork		
Approximately 5,150 feet downstream of Marksheffel Road	6,316	6,315
Approximately 210 feet downstream of Marksheffel Road	6,381	6,379

\*National Geodetic Vertical Datum, rounded to nearest whole foot

Under the above-mentioned Acts of 1968 and 1973, the Mitigation Division must develop criteria for floodplain management. To participate in the National Flood Insurance Program (NFIP), the community must use the modified BFEs to administer the floodplain management measures of the NFIP. These modified BFEs will also be used to calculate the appropriate flood insurance premium rates for new buildings and their contents and for the second layer of insurance on existing buildings and contents.

Upon the second publication of notice of these changes in this newspaper, any person has 90 days in which he or she can request, through the Chief Executive Officer of the community, that the Mitigation Division reconsider the determination. Any request for reconsideration must be based on knowledge of changed conditions or new scientific or technical data. All interested parties are on notice that until the 90-day period elapses, the Mitigation Division's determination to modify the BFEs may itself be changed.

Any person having knowledge or wishing to comment on these changes should immediately notify:

The Honorable Sallie Clark  
 Chair, El Paso County  
 Board of Commissioners  
 27 East Vermijo Avenue  
 Colorado Springs, CO 80903

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION		
CROSS SECTION	DISTANCE'	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY FEET (NGVD)	WITH FLOODWAY INCREASE
Sand Creek East Fork							
A	1,100	100	455	11.9	6,038.7	6,038.7	0.0
B	2,400	100	446	12.2	6,054.3	6,054.3	0.0
C	3,330	100	450	12.0	6,069.9	6,069.9	0.0
D	4,240	100	449	12.1	6,085.1	6,085.1	0.0
E	4,870	100	451	12.0	6,095.2	6,095.2	0.0
F	5,820	250	602	8.9	6,118.4	6,118.4	0.5
G	6,690	150	518	10.3	6,128.1	6,129.1	1.0
H	7,795	125	477	11.2	6,155.2	6,155.2	0.0
I	8,665	150	505	10.6	6,168.8	6,168.8	0.0
J	9,675	100	443	12.0	6,188.4	6,188.4	0.0
K	10,565	115	465	11.5	6,196.2	6,196.2	0.0
L	11,325	166	525	10.2	6,207.3	6,207.3	0.0
M	11,375	173	632	8.4	6,207.9	6,207.9	0.0
N	12,610	367	699	7.6	6,228.8	6,228.8	0.1
O	13,720	188	570	10.0	6,241.7	6,241.7	0.0
P	14,805	125	479	11.1	6,257.9	6,257.9	0.0
Q	14,885	125	601	8.9	6,259.9	6,259.9	1.0
R	15,850	228	582	9.2	6,268.7	6,268.7	0.0
S	16,325	300	678	7.9	6,277.3	6,277.3	0.2
T	16,995	321	690	7.7	6,291.4	6,291.4	0.6
U	17,065	326	667	8.0	6,291.4	6,292.1	0.7
V	17,915	388	1,598	3.3	6,293.4	6,294.0	0.6
W	18,995	367	683	7.8	6,307.2	6,307.6	0.4
X	20,730	103	575	11.7	6,327.8	6,327.8	0.6
Y	22,560	142	506	11.0	6,348.8	6,349.4	0.6
Z	23,060	145	503	11.0	6,358.0	6,358.0	0.0
AA	24,835	418	3,156	7.0	6,383.5	6,383.5	0.0
AB	26,470	132	452	10.0	6,402.7	6,402.7	0.0
AC	27,715	112	419	10.8	6,416.6	6,416.6	0.0

REVISIED AREA

REVISIED TO

1/2 Feet Above Confluence With Sand Creek

REVISIED BY LOMR DATED OCTOBER 30, 2006

REFLECT LOMR

REVISIED BY LOMR DATED OCTOBER 30, 2006

FEDERAL EMERGENCY MANAGEMENT AGENCY  
EL PASO COUNTY, CO  
AND INCORPORATED AREAS

FLOODWAY DATA REFLECTIVE DEC 13, 2006

SAND CREEK EAST FORK

ELEVATION IN FEET (NGVD 29)

6400

6380

6360

6340

6320

6300

6280

19500

20000

20500

21000

21500


22000

22500


23000

23500

24000

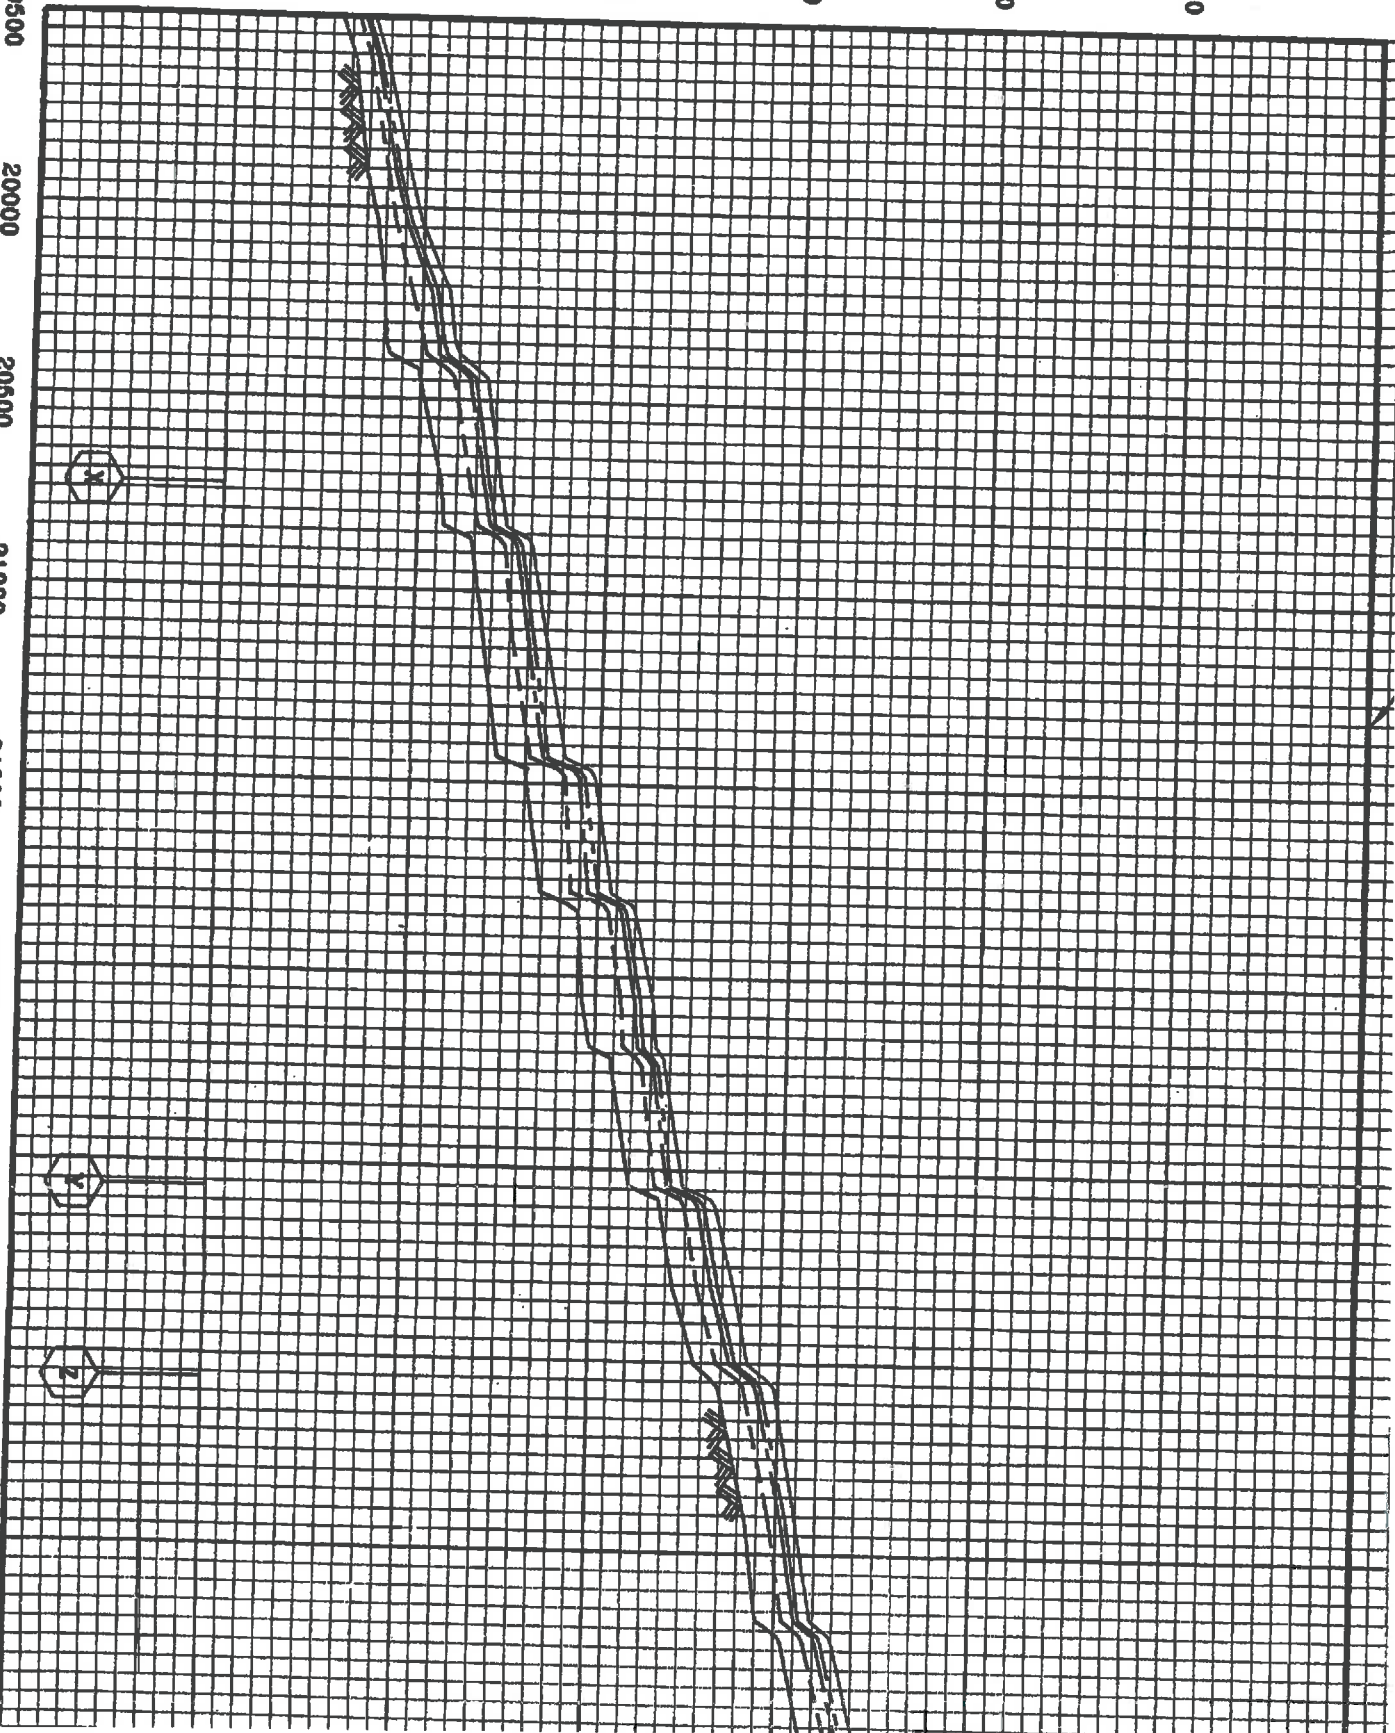

STREAM DISTANCE IN FEET ABOVE CONFLUENCE WITH SAND CR.

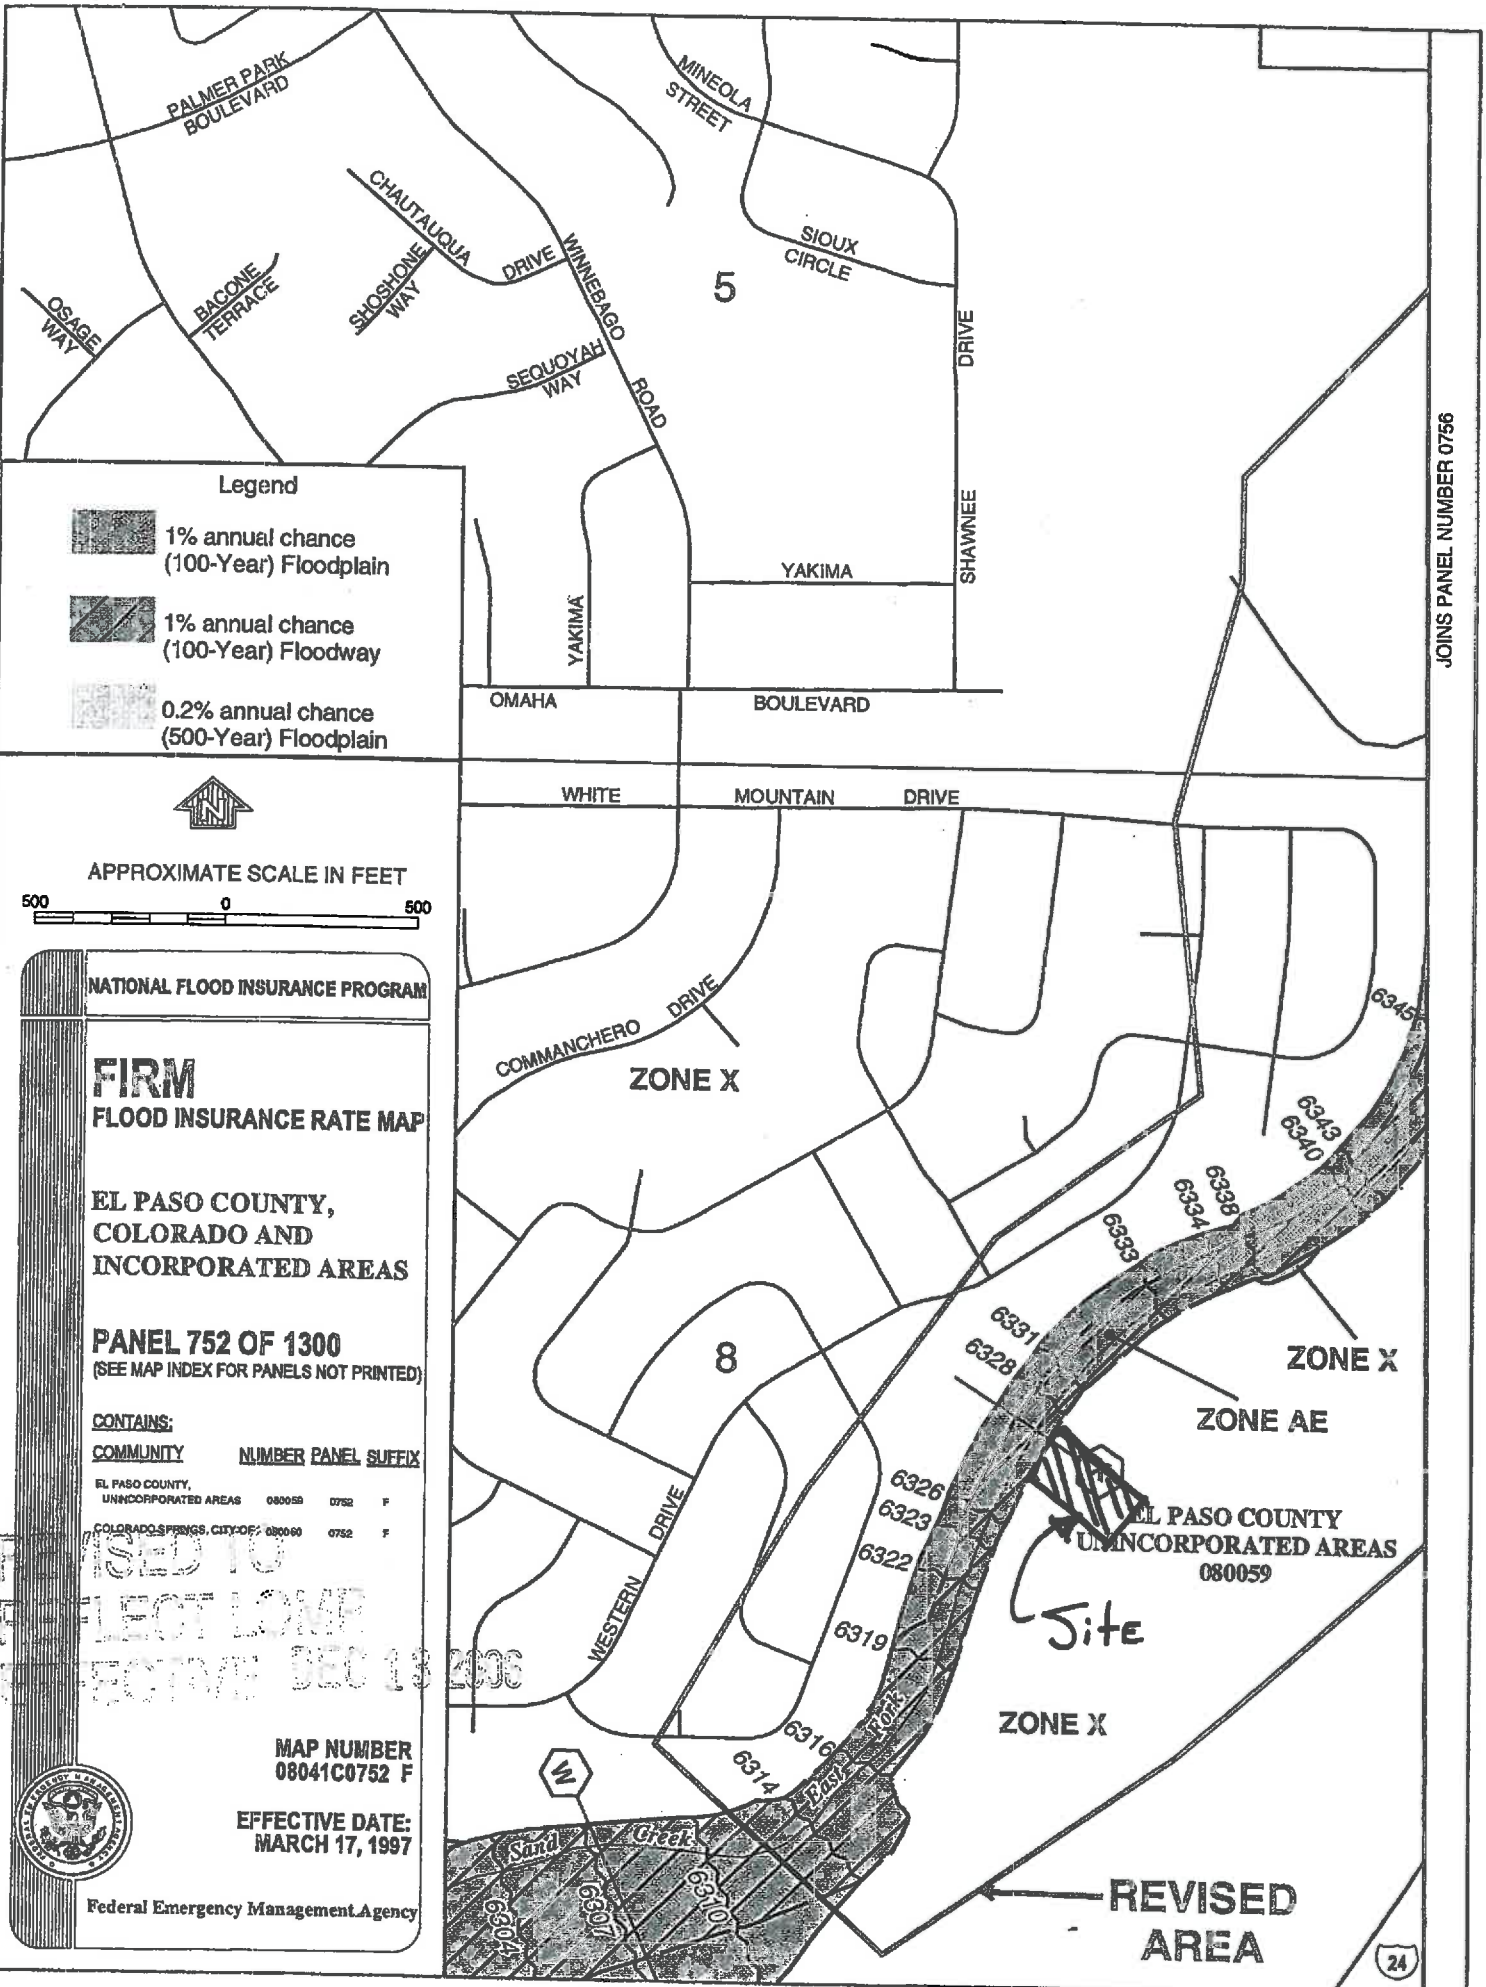


JOINS PANEL NUMBER 0756

**Legend**

- 1% annual chance (100-Year) Floodplain
- 1% annual chance (100-Year) Floodway
- 0.2% annual chance (500-Year) Floodplain



APPROXIMATE SCALE IN FEET



**NATIONAL FLOOD INSURANCE PROGRAM**

**FIRM  
FLOOD INSURANCE RATE MAP**

**EL PASO COUNTY,  
COLORADO AND  
INCORPORATED AREAS**

**PANEL 752 OF 1300**  
(SEE MAP INDEX FOR PANELS NOT PRINTED)

**CONTAINS:**

COMMUNITY	NUMBER	PANEL	SUFFIX
EL PASO COUNTY, UNINCORPORATED AREAS	080059	0752	F
COLORADO SPRINGS, CITY OF	080060	0752	F

EL PASO COUNTY  
UNINCORPORATED AREAS  
080059

**REVISIONS TO  
ELECT LAMP  
EFFECTIVE DEC 18 2006**

MAP NUMBER  
08041C0752 F

EFFECTIVE DATE:  
MARCH 17, 1997




Federal Emergency Management Agency

AREA REVISED  
BY LOMR DATED  
MARCH 24, 2004

AREA REVISED  
BY LOMR DATED  
OCTOBER 30, 2006

JOINS PANEL 0752

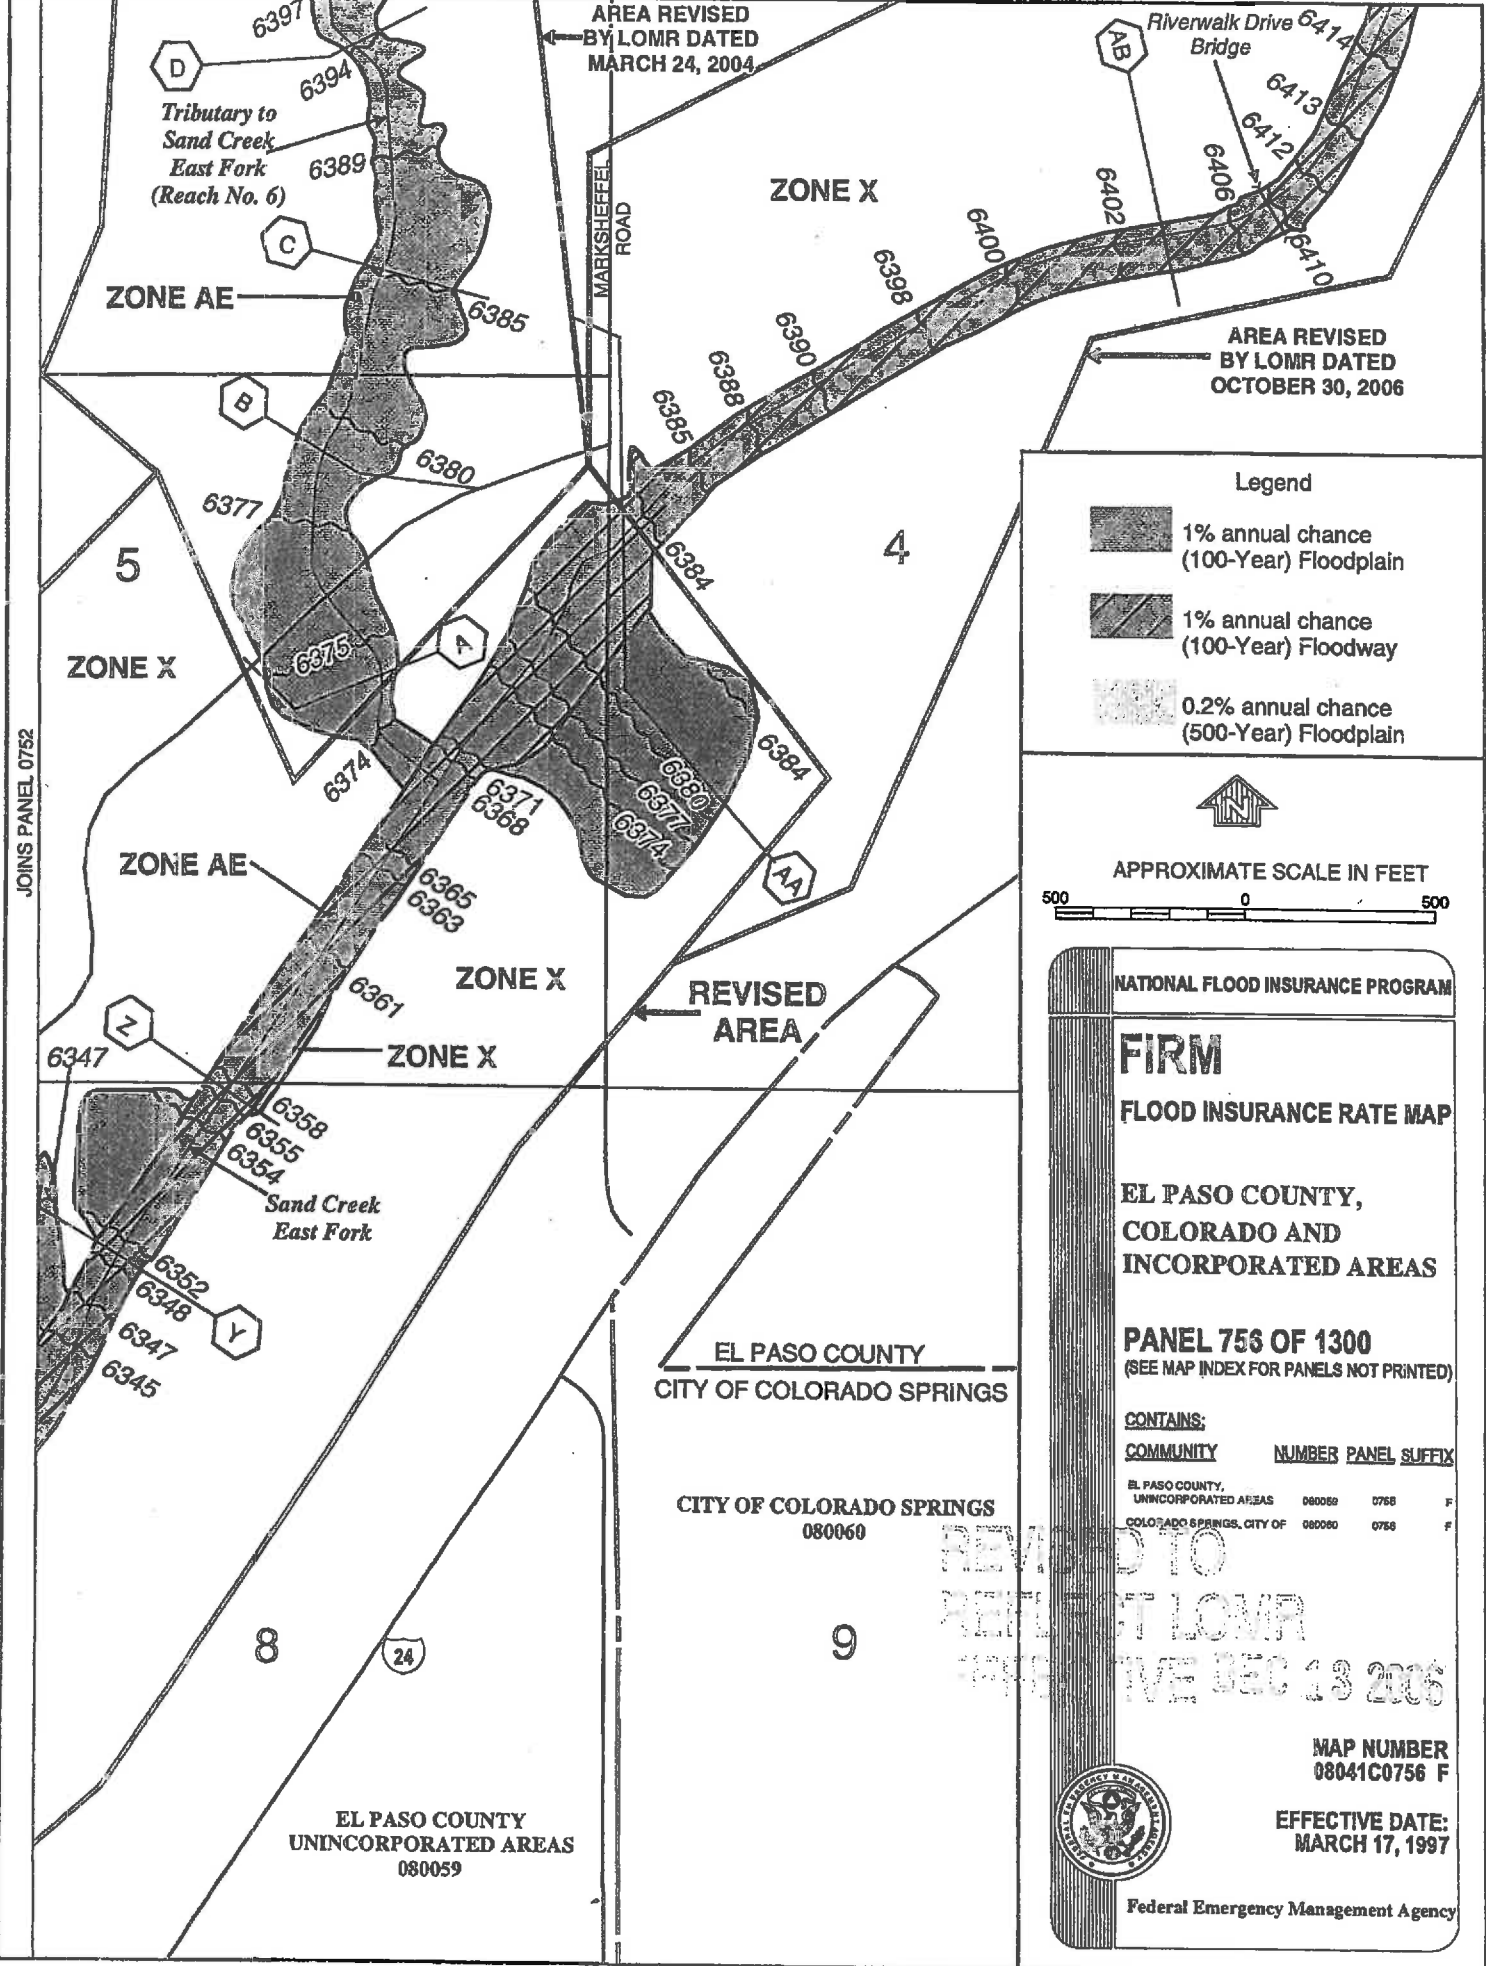

REVISED TO  
REFLECT LOMR  
EFFECTIVE DATE 050 13 2006



MAP NUMBER  
08041C0756 F

EFFECTIVE DATE:  
MARCH 17, 1997

Federal Emergency Management Agency


**DRAINAGE MAP / GRADING PLANS**




# MASTER BLASTER

EL PASO COUNTY, STATE OF COLORADO  
 LOT 35 OF CLAREMONT BUSINESS PARK FIL. NO. 2

## PROPOSED DRAINAGE MAP

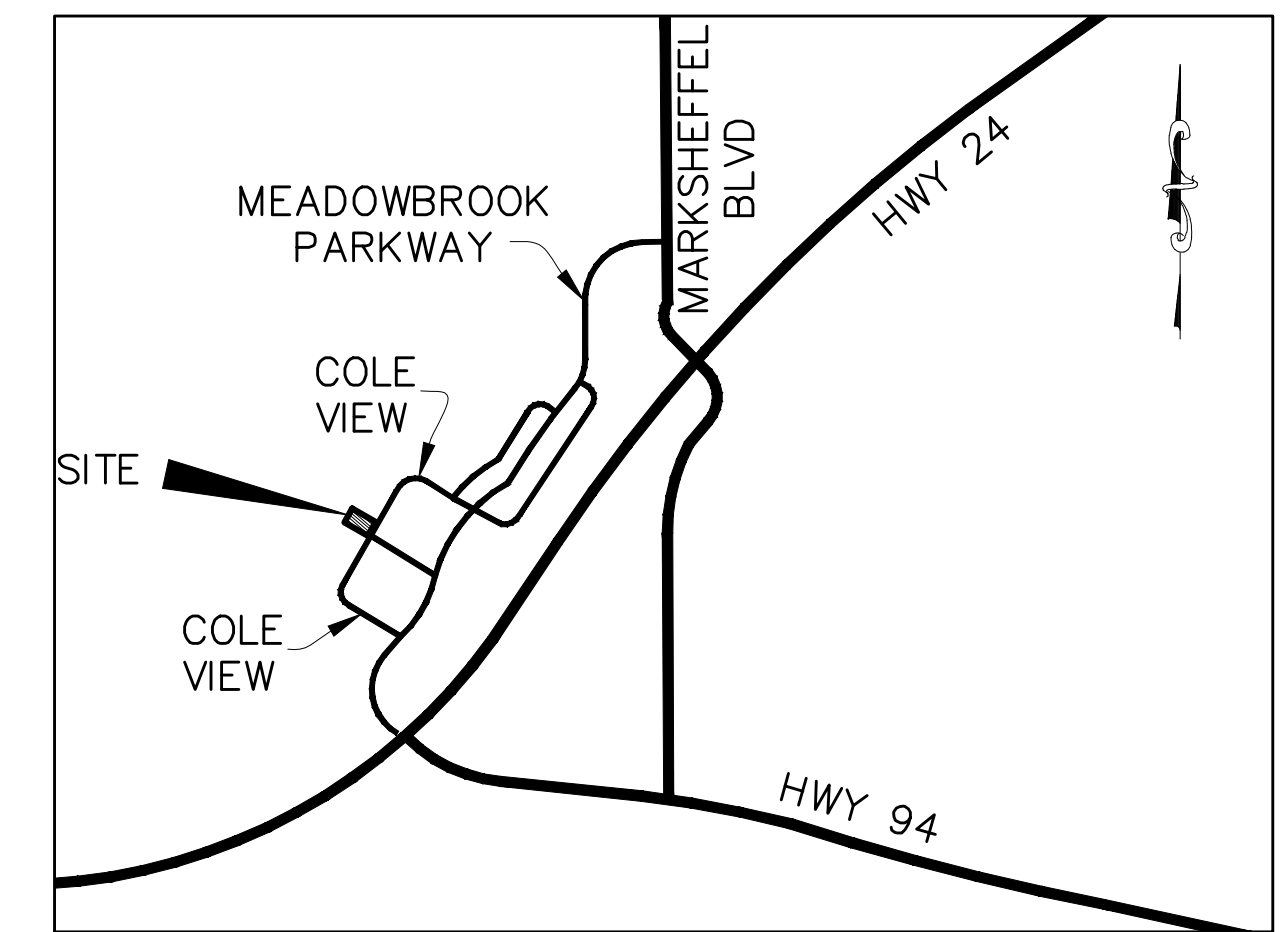


VICINITY MAP  
 N.T.S.

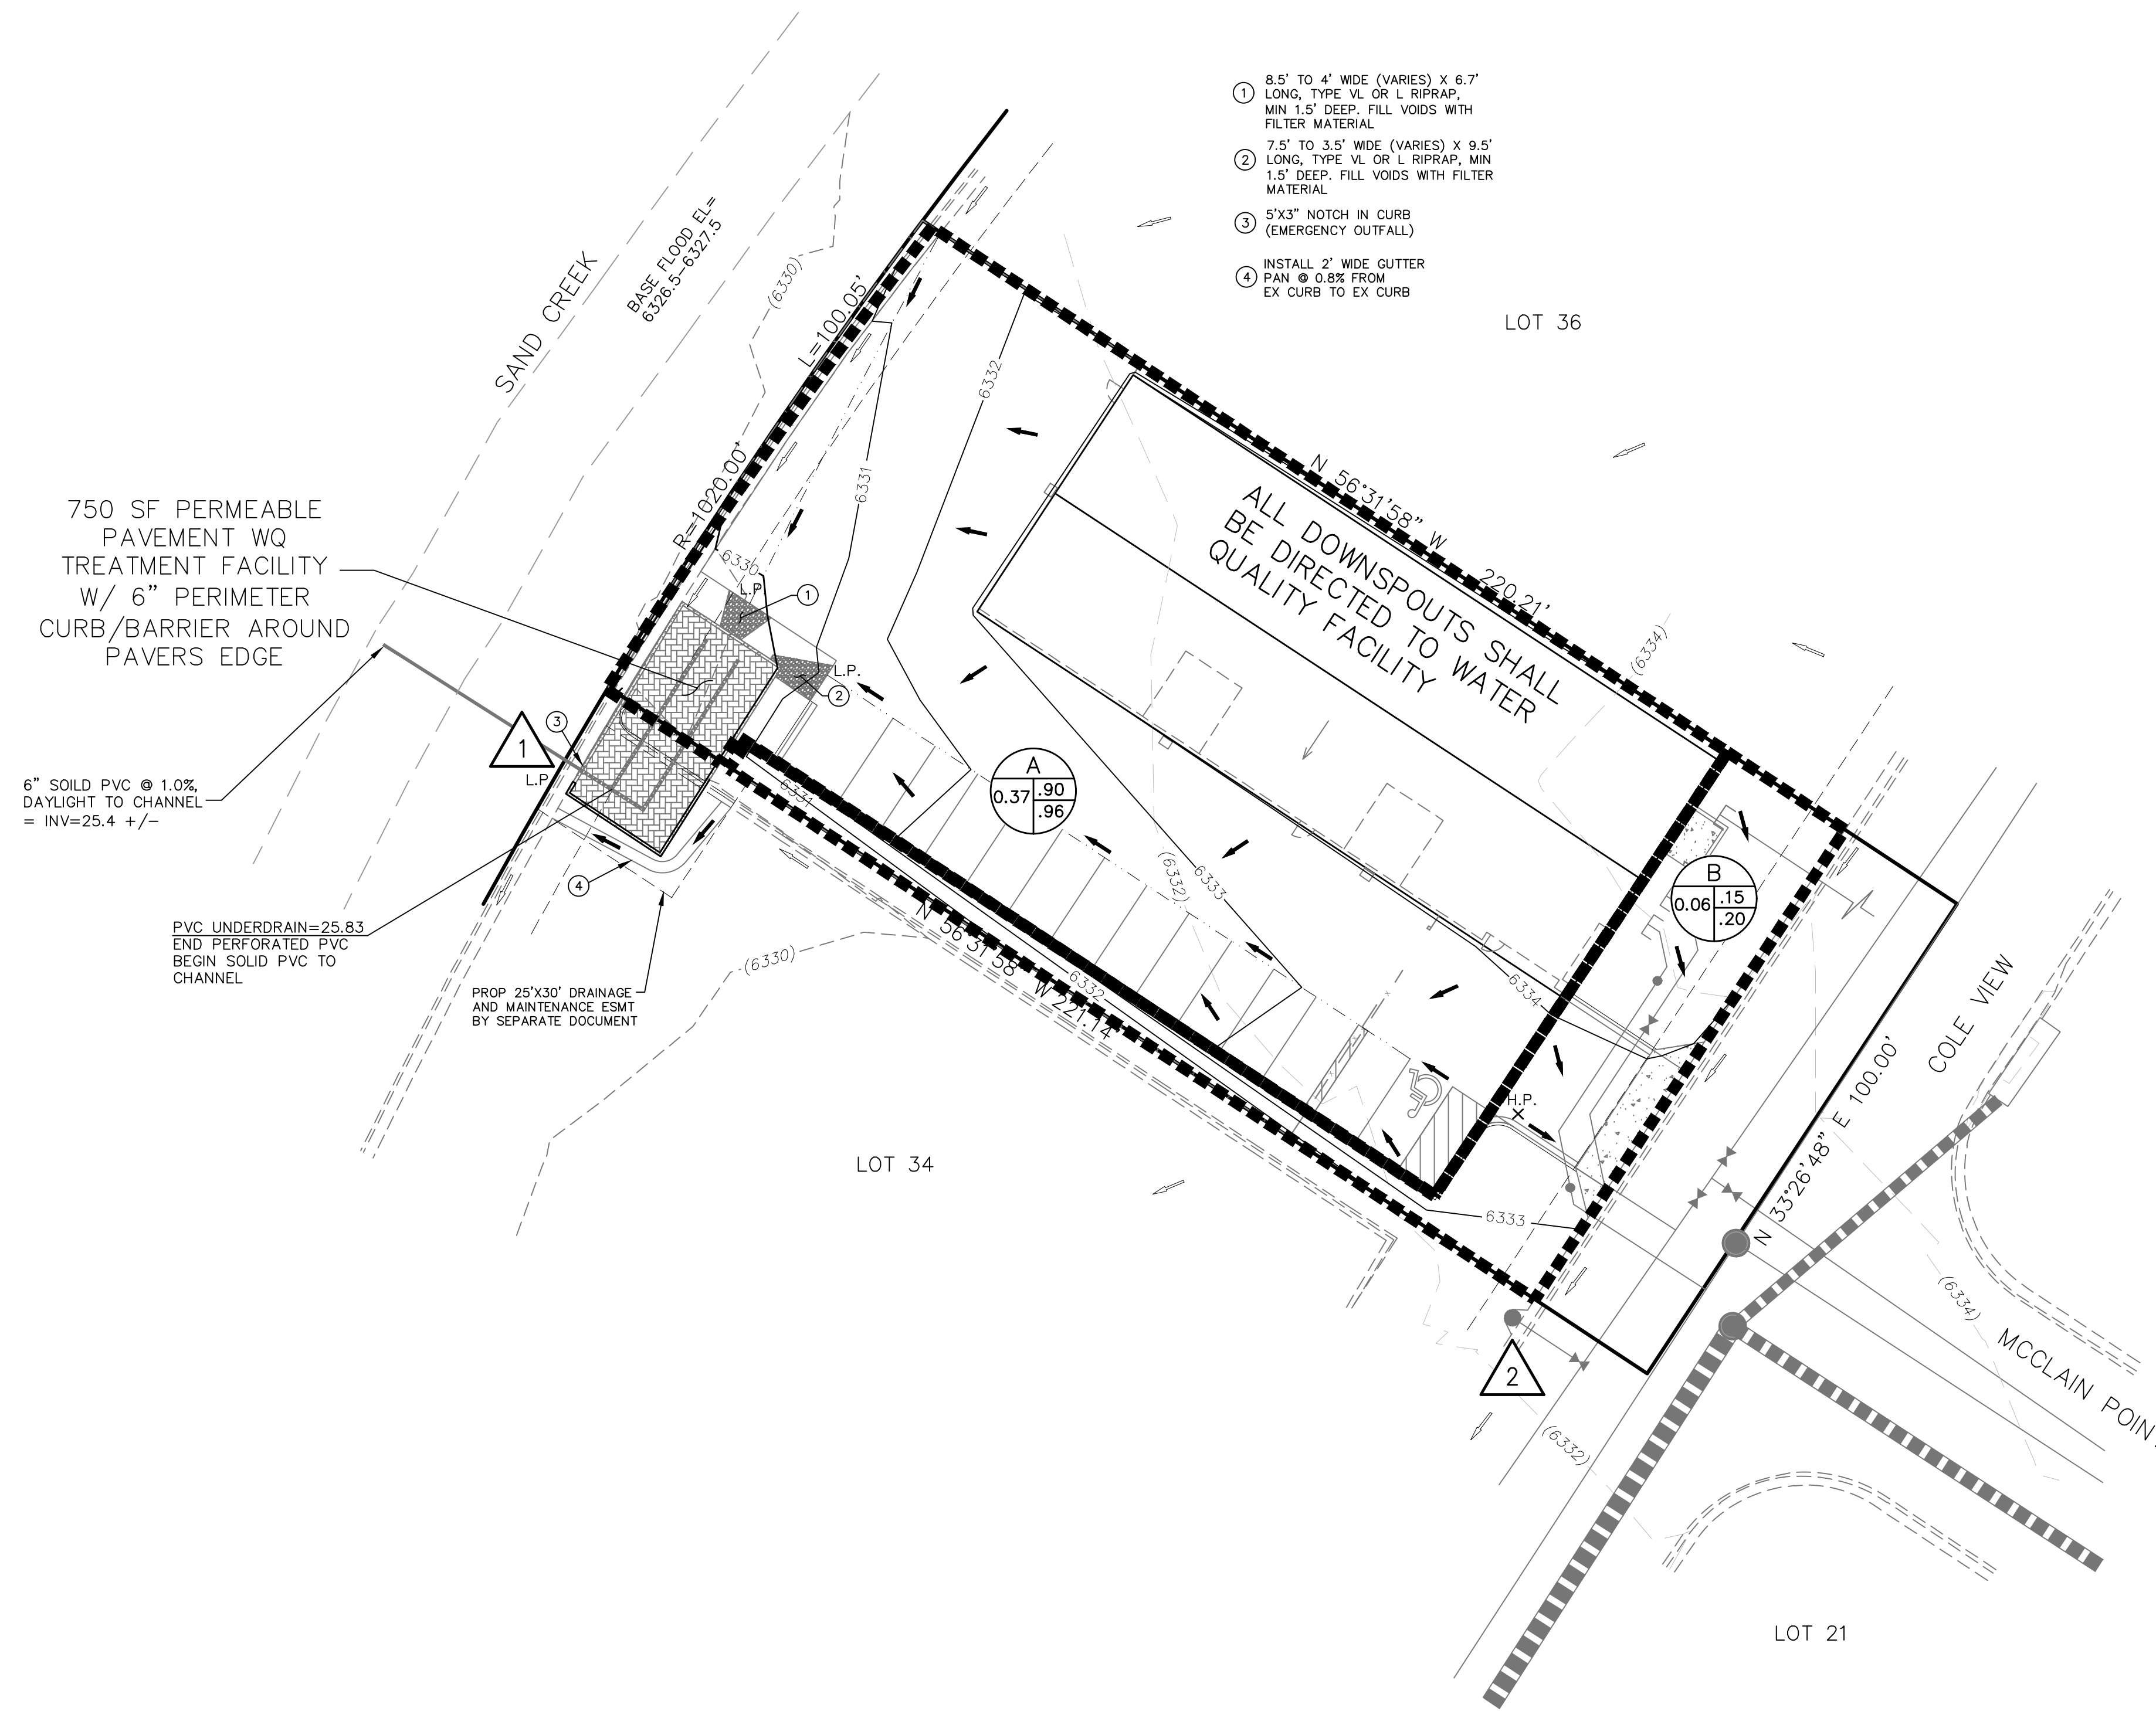

- ① 8.5" TO 4" WIDE (VARIES) X 6.7" LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP, FILL VOIDS WITH FILTER MATERIAL
- ② 7.5" TO 3.5" WIDE (VARIES) X 9.5" LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP, FILL VOIDS WITH FILTER MATERIAL
- ③ 5'X3" NOTCH IN CURB (EMERGENCY OUTFALL)
- ④ INSTALL 2" WIDE GUTTER PAN @ 0.8% FROM EX CURB TO EX CURB

### LEGEND

- BASIN DESIGNATION
- |       |      |
|-------|------|
| Z     | C5   |
| 25    | .25  |
| ACRES | .35  |
|       | C100 |
- ① SURFACE DESIGN POINT
  - CURRENT DEVELOPMENT BASIN BOUNDARY
  - - - (6920) - - - EXISTING CONTOUR
  - 6920 — PROP CONTOUR
  - EXISTING STORM SEWER PIPE
  - INLET
  - EXISTING FLOW DIRECTION ARROW
  - ↑ FLOW DIRECTION
  - H.P. X HIGH POINT
  - L.P. X LOW POINT

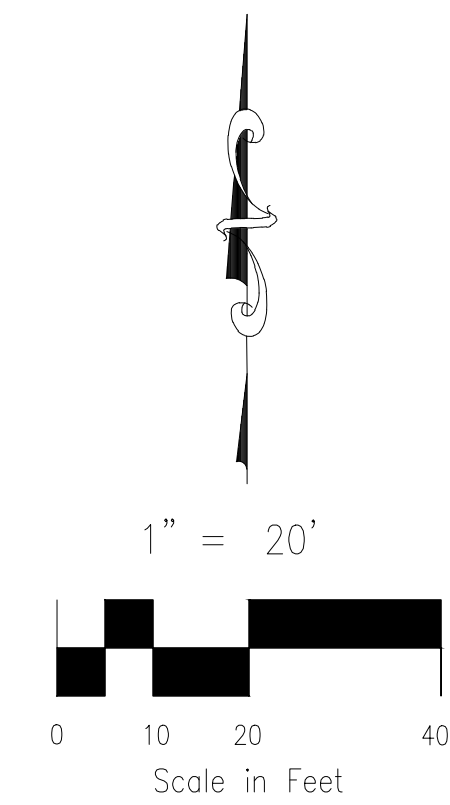

DRAINAGE MAP  
 MASTER BLASTER  
 JOB NO. 44-029  
 DATE PREPARED: OCTOBER 27, 2017  
 DATE REVISED: FEBRUARY 13, 2018



20 BOULDER CRESCENT, SUITE 110  
 COLORADO SPRINGS, CO 80903  
 PHONE: 719.955.5485



**GRADING AND EROSION CONTROL NOTES:**

- CONSTRUCTION MAY NOT COMMENCE UNTIL A CONSTRUCTION PERMIT IS OBTAINED FROM DEVELOPMENT SERVICES AND A PRECONSTRUCTION CONFERENCE IS HELD WITH DEVELOPMENT SERVICES INSPECTIONS.
- STORMWATER DISCHARGES FROM CONSTRUCTION SITES SHALL NOT CAUSE OR THREATEN TO CAUSE POLLUTION, CONTAMINATION, OR DEGRADATION OF STATE WATERS. ALL WORK AND EARTH DISTURBANCE SHALL BE DONE IN A MANNER THAT MINIMIZES POLLUTION OF ANY ON-SITE OR OFF SITE WATERS, INCLUDING WETLANDS.
- NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS TO REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING.
- A SEPARATE STORMWATER MANAGEMENT PLAN (SMWP) FOR THIS PROJECT SHALL BE COMPLETED AND AN EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP) ISSUED PRIOR TO COMMENCING CONSTRUCTION. DURING CONSTRUCTION THE SMWP IS THE RESPONSIBILITY OF THE DESIGNATED STORMWATER MANAGER, SHALL BE LOCATED ON SITE AT ALL TIMES AND SHALL BE KEPT UP TO DATE WITH WORK PROGRESS AND CHANGES IN THE FIELD.
- ONCE THE ESQCP HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT CONTROL BMPs AS INDICATED ON THE GEC. A PRECONSTRUCTION MEETING BETWEEN THE CONTRACTOR, ENGINEER, AND EL PASO COUNTY WILL BE HELD PRIOR TO ANY CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE APPLICANT TO COORDINATE THE MEETING TIME AND PLACE WITH COUNTY DSD INSPECTIONS STAFF.
- SOIL EROSION CONTROL MEASURES FOR ALL SLOPES, CHANNELS, DITCHES, OR ANY DISTURBED LAND AREA SHALL BE COMPLETED WITHIN 21 CALENDAR DAYS AFTER FINAL GRADING, OR FINAL EARTH DISTURBANCE, HAS BEEN COMPLETED. DISTURBED AREAS AND STOCKPILES WHICH ARE NOT AT FINAL GRADE BUT WILL REMAIN DORMANT FOR LONGER THAN 30 DAYS SHALL ALSO BE MULCHED WITHIN 21 DAYS AFTER INTERIM GRADING. AN AREA THAT IS GOING TO REMAIN IN AN INTERIM STATE FOR MORE THAN 60 DAYS SHALL ALSO BE SEEDED. ALL TEMPORARY SOIL EROSION CONTROL MEASURES AND BMPs SHALL BE MAINTAINED UNTIL PERMANENT SOIL EROSION CONTROL MEASURES ARE IMPLEMENTED AND ESTABLISHED.
- TEMPORARY SOIL EROSION CONTROL FACILITIES SHALL BE REMOVED AND EARTH DISTURBANCE AREAS GRADED AND STABILIZED WITH PERMANENT SOIL EROSION CONTROL MEASURES PURSUANT TO STANDARDS AND SPECIFICATION PRESCRIBED IN THE DCM VOLUME II AND THE ENGINEERING CRITERIA MANUAL (ECM) APPENDIX I.
- ALL PERSONS ENGAGED IN EARTH DISTURBANCE SHALL IMPLEMENT AND MAINTAIN ACCEPTABLE SOIL EROSION AND SEDIMENT CONTROL MEASURES INCLUDING BMPs IN CONFORMANCE WITH THE EROSION CONTROL TECHNICAL STANDARDS OF THE DRAINAGE CRITERIA MANUAL (DCM) VOLUME II AND IN ACCORDANCE WITH THE STORMWATER MANAGEMENT PLAN (SMWP).
- ALL TEMPORARY EROSION CONTROL FACILITIES INCLUDING BMPs AND ALL PERMANENT FACILITIES INTENDED TO CONTROL EROSION OF ANY EARTH DISTURBANCE OPERATIONS, SHALL BE INSTALLED AS DEFINED IN THE APPROVED PLANS, THE SMWP AND THE DCM VOLUME II AND MAINTAINED THROUGHOUT THE DURATION OF THE EARTH DISTURBANCE OPERATION.
- ANY EARTH DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER SO AS TO EFFECTIVELY REDUCE ACCELERATED SOIL EROSION AND RESULTING SEDIMENTATION. ALL DISTURBANCES SHALL BE DESIGNED, CONSTRUCTED, AND COMPLETED SO THAT THE EXPOSED AREA OF ANY DISTURBED LAND SHALL BE LIMITED TO THE SHORTEST PRACTICAL PERIOD OF TIME.
- ANY TEMPORARY OR PERMANENT FACILITY DESIGNED AND CONSTRUCTED FOR THE CONVEYANCE OF STORMWATER AROUND, THROUGH, OR FROM THE EARTH DISTURBANCE AREA SHALL BE DESIGNED TO LIMIT THE DISCHARGE TO A NON-EROSIVE VELOCITY.
- CONCRETE WASH WATER SHALL BE CONTAINED AND DISPOSED OF IN ACCORDANCE WITH THE SMWP. NO WASH WATER SHALL BE DISCHARGED TO OR ALLOWED TO RUNOFF TO STATE WATERS, INCLUDING ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR FACILITIES.
- EROSION CONTROL BLANKETING IS TO BE USED ON SLOPES STEEPER THAN 3:1.
- BUILDING, CONSTRUCTION, EXCAVATION, OR OTHER WASTE MATERIALS SHALL NOT BE TEMPORARILY PLACED OR STORED IN THE STREET, ALLEY, OR OTHER PUBLIC WAY, UNLESS IN ACCORDANCE WITH AN APPROVED TRAFFIC CONTROL PLAN. BMP'S MAY BE REQUIRED BY EL PASO COUNTY ENGINEERING IF DEEMED NECESSARY, BASED ON SPECIFIC CONDITIONS AND CIRCUMSTANCES.
- VEHICLE TRACKING OF SOILS AND CONSTRUCTION DEBRIS OFF-SITE SHALL BE MINIMIZED. MATERIALS TRACKED OFFSITE SHALL BE CLEANED UP AND PROPERLY DISPOSED OF IMMEDIATELY.
- CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL WASTES FROM THE CONSTRUCTION SITE FOR DISPOSAL IN ACCORDANCE WITH LOCAL AND STATE REGULATORY REQUIREMENTS. NO CONSTRUCTION DEBRIS, TREE SLASH, BUILDING MATERIAL WASTES OR UNUSED BUILDING MATERIALS SHALL BE BURIED, DUMPED, OR DISCHARGED AT THE SITE.
- THE OWNER, SITE DEVELOPER, CONTRACTOR, AND/OR THEIR AUTHORIZED AGENTS SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL CONSTRUCTION DEBRIS, DIRT, TRASH, ROCK, SEDIMENT, AND SAND THAT MAY ACCUMULATE IN THE STORM SEWER OR OTHER DRAINAGE CONVEYANCE SYSTEM AND STORMWATER APPURTENANCES AS A RESULT OF SITE DEVELOPMENT.
- THE QUANTITY OF MATERIALS STORED ON THE PROJECT SITE SHALL BE LIMITED, AS MUCH AS PRACTICAL, TO THAT QUANTITY REQUIRED TO PERFORM THE WORK IN AN ORDERLY SEQUENCE. ALL MATERIALS STORED ON-SITE SHALL BE STORED IN A NEAT, ORDERLY MANNER, IN THEIR ORIGINAL CONTAINERS, WITH ORIGINAL MANUFACTURER'S LABELS.
- NO CHEMICALS ARE TO BE USED BY THE CONTRACTOR, WHICH HAVE THE POTENTIAL TO BE RELEASED IN STORMWATER UNLESS PERMISSION FOR THE USE OF A SPECIFIC CHEMICAL IS GRANTED IN WRITING BY THE ECM ADMINISTRATOR. IN GRANTING THE USE OF SUCH CHEMICALS, SPECIAL CONDITIONS AND MONITORING MAY BE REQUIRED.
- BULK STORAGE STRUCTURES FOR PETROLEUM PRODUCTS AND OTHER CHEMICALS SHALL HAVE ADEQUATE PROTECTION SO AS TO CONTAIN ALL SPILLS AND PREVENT ANY SPILLED MATERIAL FROM ENTERING STATE WATERS, INCLUDING ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR FACILITIES.
- NO PERSON SHALL CAUSE THE IMPEDIMENT OF STORMWATER FLOW IN THE FLOW LINE OF THE CURB AND GUTTER OR IN THE DITCHLINE.
- INDIVIDUALS SHALL COMPLY WITH THE "COLORADO WATER QUALITY CONTROL ACT" (TITLE 25, ARTICLE 8, CRS), AND THE "CLEAN WATER ACT" (33 USC 1344), IN ADDITION TO THE REQUIREMENTS INCLUDED IN THE DCM VOLUME II AND THE ECM APPENDIX I. ALL APPROPRIATE PERMITS MUST BE OBTAINED BY THE CONTRACTOR PRIOR TO CONSTRUCTION (NPDES, FLOODPLAIN, 404, FUGITIVE DUST, ETC.). IN THE EVENT OF CONFLICTS BETWEEN THESE REQUIREMENTS AND LAWS, RULES, OR REGULATIONS OF OTHER FEDERAL, STATE, OR COUNTY AGENCIES, THE MORE RESTRICTIVE LAWS, RULES, OR REGULATIONS SHALL APPLY.
- ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE AT APPROVED CONSTRUCTION ACCESS POINTS.
- PRIOR TO ACTUAL CONSTRUCTION THE PERMITEE SHALL VERIFY THE LOCATION OF EXISTING UTILITIES.
- A WATER SOURCE SHALL BE AVAILABLE ON SITE DURING EARTHWORK OPERATIONS AND UTILIZED AS REQUIRED TO MINIMIZE DUST FROM EARTHWORK EQUIPMENT AND WIND.
- THE SOILS REPORT FOR THIS SITE HAS BEEN PREPARED BY TERRACON # 23055071 MAY 30, 2006. AND SHALL BE CONSIDERED A PART OF THESE PLANS.
- AT LEAST TEN DAYS PRIOR TO THE ANTICIPATED START OF CONSTRUCTION, FOR PROJECTS THAT WILL DISTURB 1 ACRE OR MORE, THE OWNER OR OPERATOR OF CONSTRUCTION ACTIVITY SHALL SUBMIT A PERMIT APPLICATION FOR STORMWATER DISCHARGE TO THE COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT, WATER QUALITY DIVISION. THE APPLICATION CONTAINS CERTIFICATION OF COMPLETION OF A STORMWATER MANAGEMENT PLAN (SMWP), OF WHICH THIS GRADING AND EROSION CONTROL PLAN MAY BE A PART. FOR INFORMATION OR APPLICATION MATERIALS CONTACT:

**COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT**  
 WATER QUALITY CONTROL DIVISION  
 WQCD - PERMITS  
 4300 CHERRY CREEK DRIVE SOUTH  
 DENVER, CO 80246-1530  
 ATTN: PERMITS UNIT

**FOR BURIED UTILITY INFORMATION**  
 48 HRS BEFORE YOU DIG  
 CALL 1-800-922-1987

**FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES**  
 WATER EMERGENCIES 520-0300


**MASTER BLASTER**

EL PASO COUNTY, STATE OF COLORADO  
 GRADING & EROSION CONTROL PLAN

LOT 35 OF CLAREMONT BUSINESS PARK FIL. NO. 2

**LEGEND**

- EX MAJ CONT
- EX MIN CONT
- PROP MAJ CONT
- PROP MIN CONT
- LOW POINT
- HIGH POINT
- EXISTING FLOWLINE
- TOP OF CURB
- FINISH GRADE
- FINISH FLOOR
- TOP OF FOOTING
- SILT FENCE
- VEHICLE TRACKING CONTROL
- CONCRETE WASH-OUT BASIN

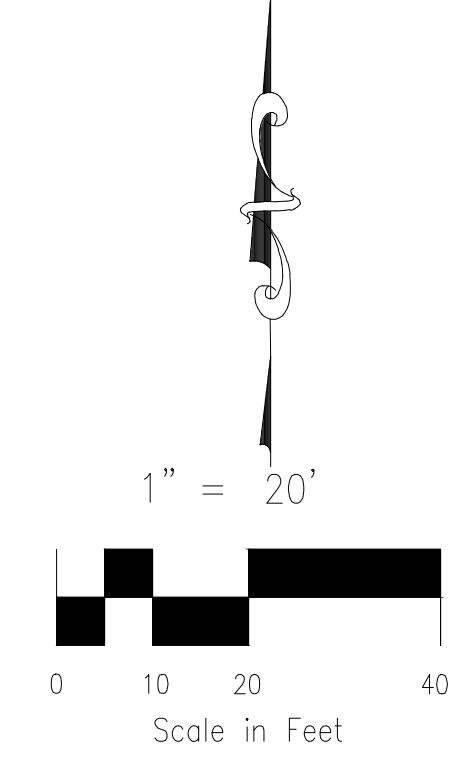

SEE PARTIAL INFILTRATION SECTION FOR PERMEABLE PAVEMENT SYSTEM W/ 6" PERIMETER CURB/BARRIER AROUND EDGE (750 SF)



6" SOLID PVC @ 1.0% DAYLIGHT TO CHANNEL = INV=25.4 +/-

PVC UNDERDRAIN=25.83 END PERFORATED PVC BEGIN SOLID PVC TO CHANNEL


CONSTRUCT A 6" CONCRETE CURB AROUND PAVERS EDGE

PROP 25'X30' DRAINAGE AND MAINTENANCE ESMT BY SEPARATE DOCUMENT

SAWCUT AND REMOVE EX ASPHALT, CURB AND GUTTER.

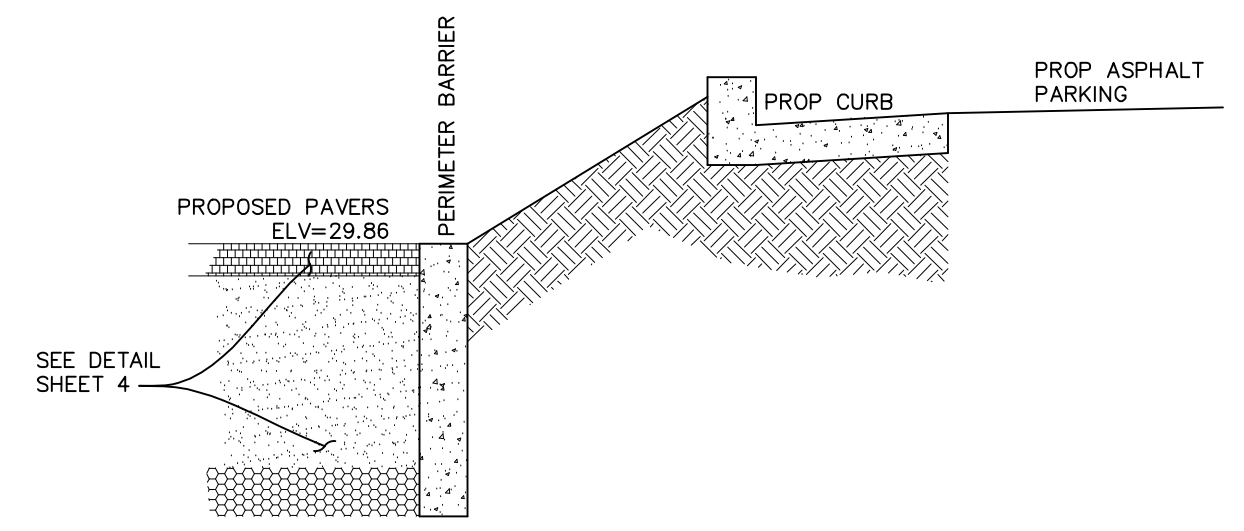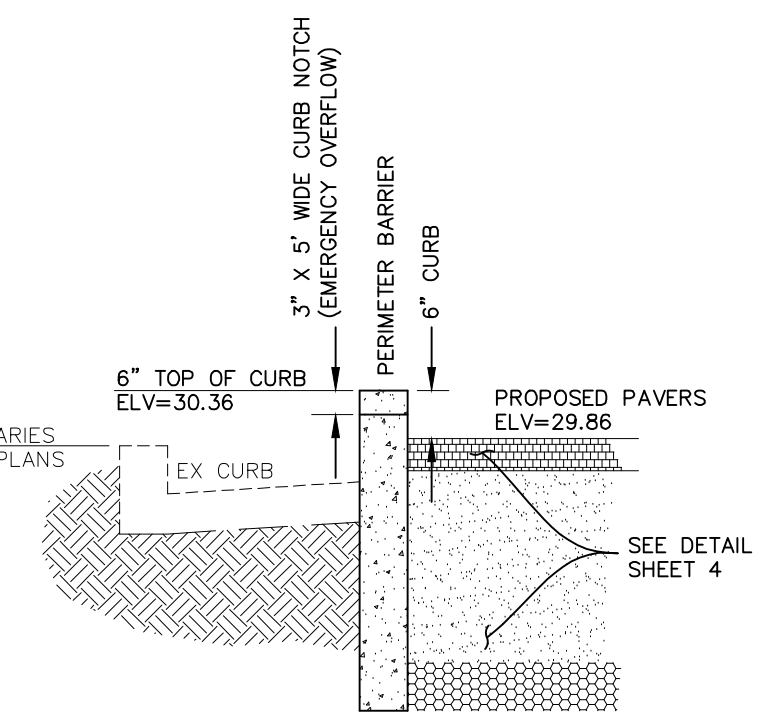

- 8.5' TO 4' WIDE (VARIES) X 6.7' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL.
- 7.5' TO 3.5' WIDE (VARIES) X 9.5' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL.
- 5'X3' NOTCH IN CURB (EMERGENCY OUTFALL)
- INSTALL 2' WIDE GUTTER PAN @ 0.8% FROM EX CURB TO EX CURB

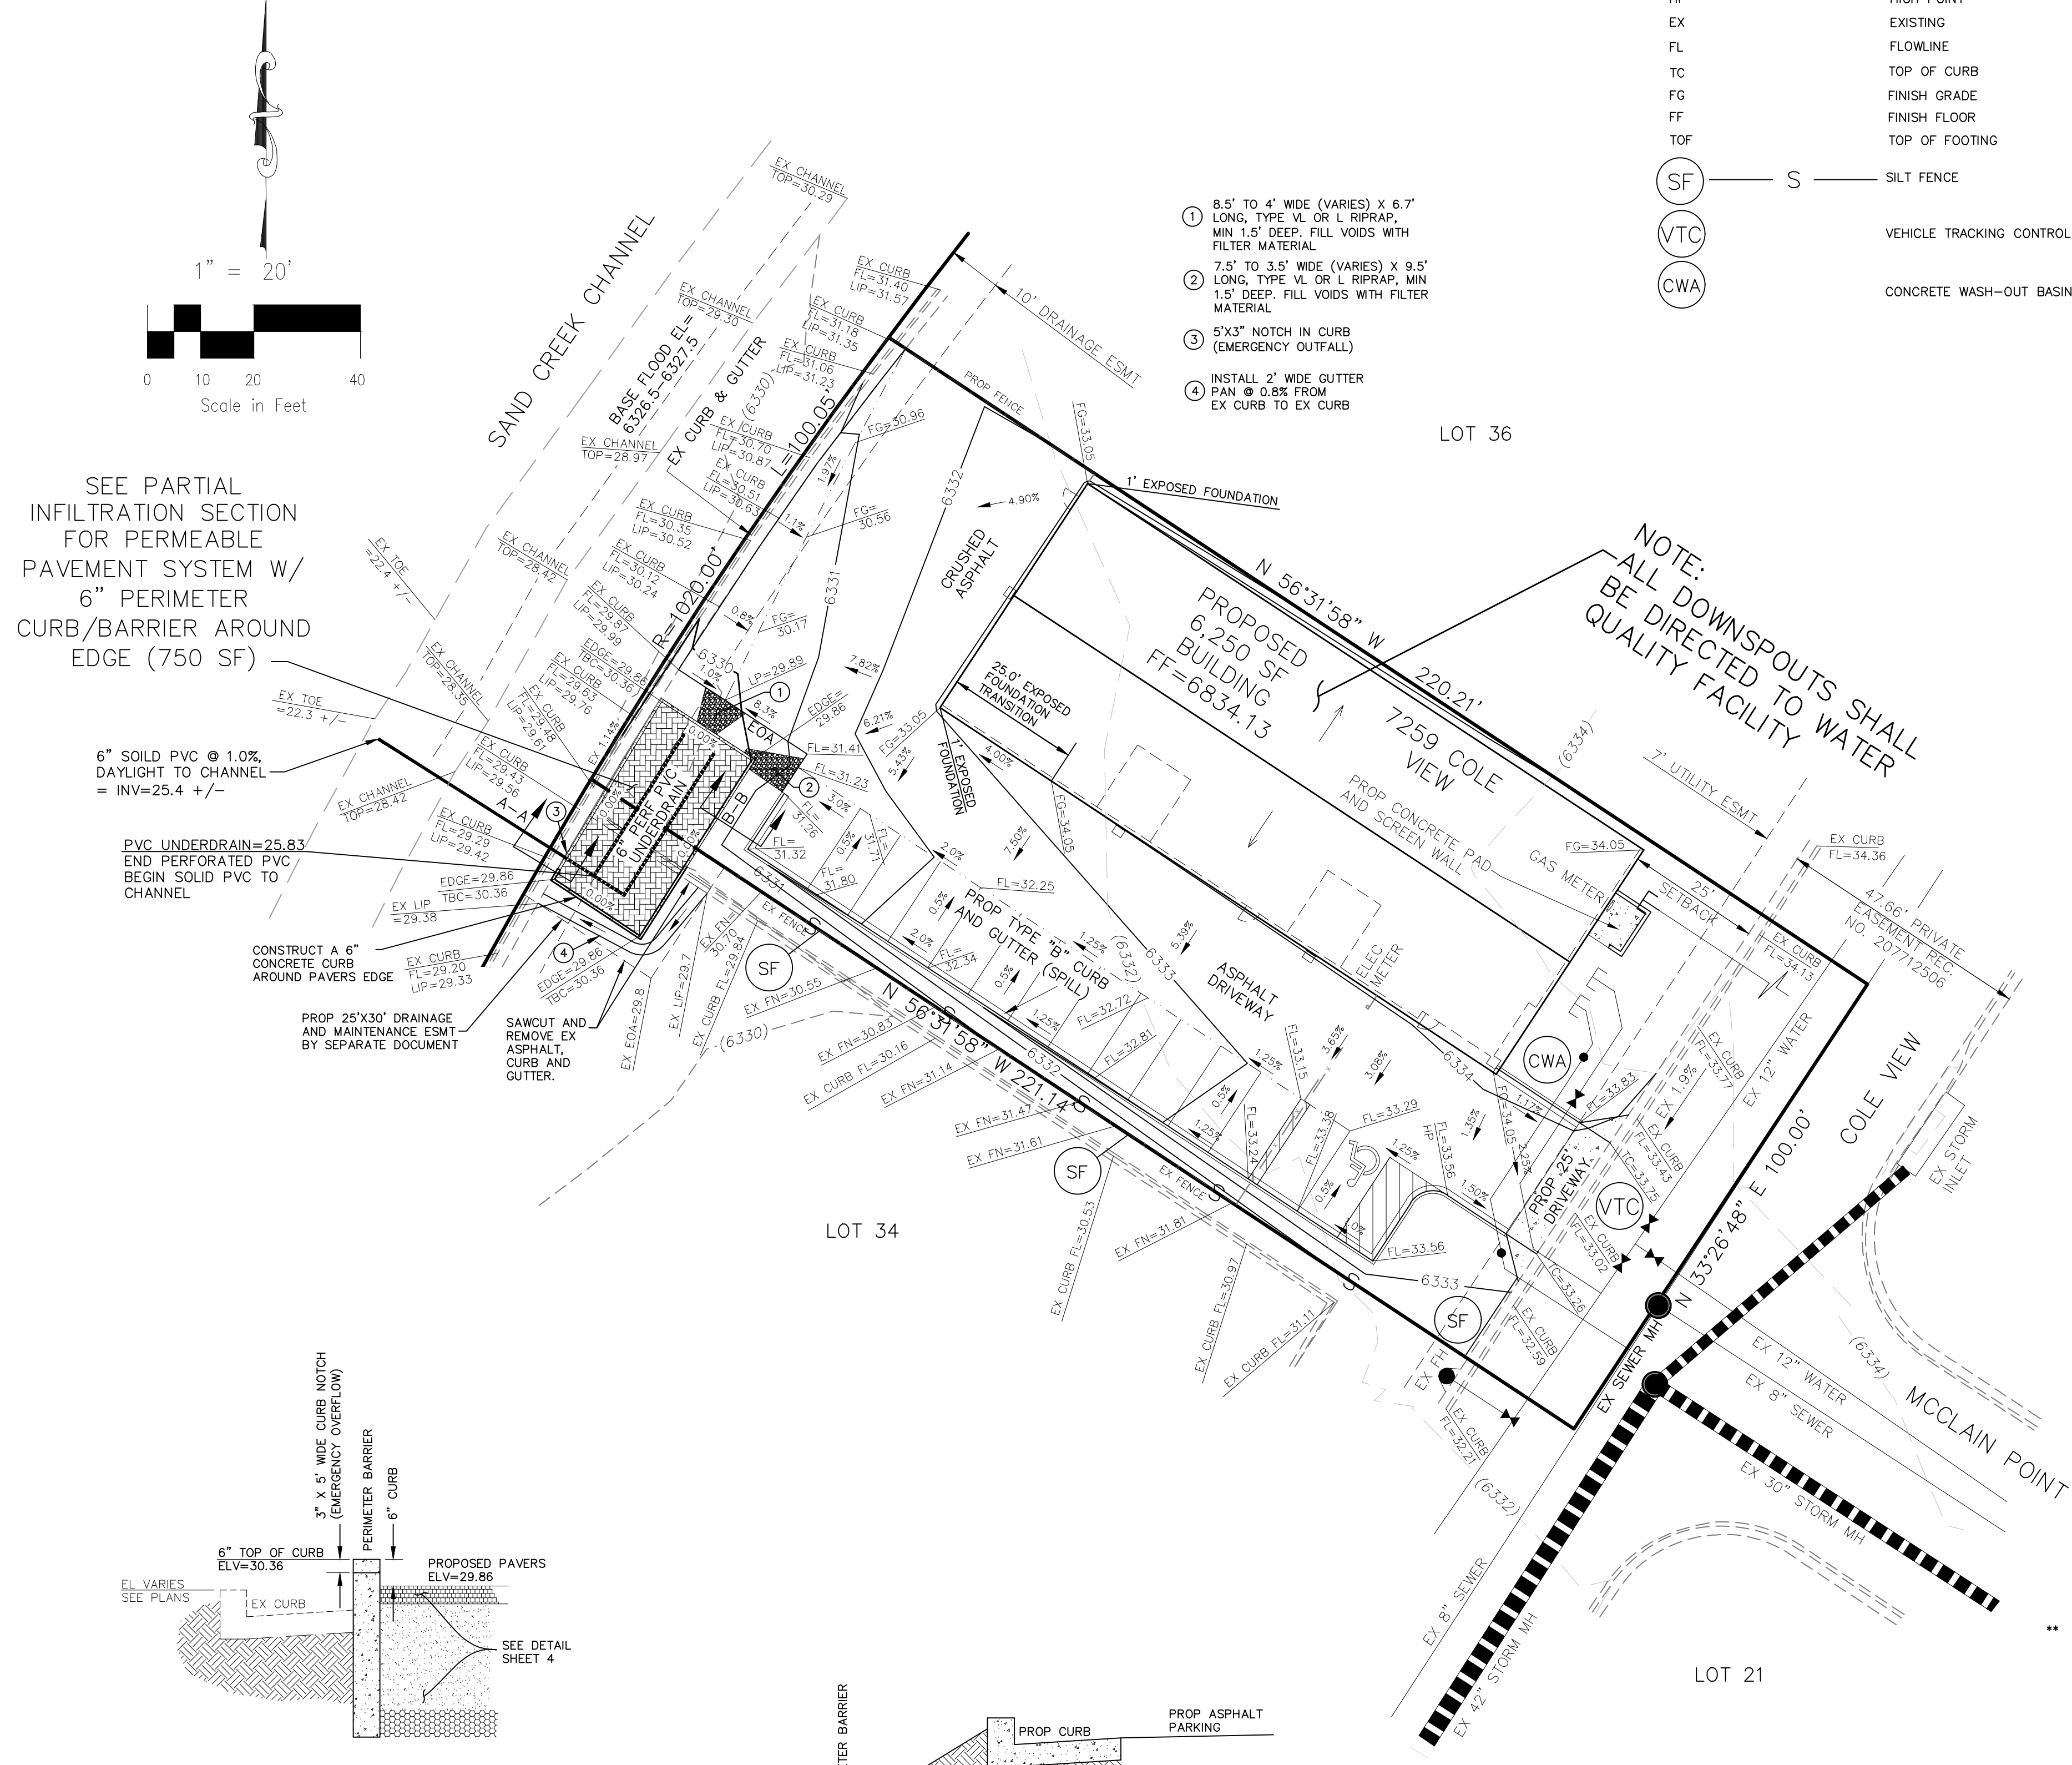

**DESIGN ENGINEER'S STATEMENT**

THIS GRADING AND EROSION CONTROL PLAN WAS PREPARED UNDER MY DIRECTION AND SUPERVISION AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. SAID PLAN HAS BEEN PREPARED ACCORDING TO THE CRITERIA ESTABLISHED BY THE COUNTY FOR GRADING AND EROSION CONTROL PLANS. I ACCEPT RESPONSIBILITY FOR ANY LIABILITY CAUSED BY NEGLIGENT ACTS, ERRORS OR OMISSIONS ON MY PART IN PREPARING THIS PLAN.

VIRGIL A. SANCHEZ, COLORADO P.E. #37160 DATE  
 FOR AND ON BEHALF OF M & S CIVIL CONSULTANTS, INC.

**OWNER/DEVELOPER'S STATEMENT:**

I, THE OWNER/DEVELOPER HAVE READ AND WILL COMPLY WITH ALL OF THE REQUIREMENTS SPECIFIED IN THESE DETAILED PLANS AND SPECIFICATIONS.

NAME: \_\_\_\_\_ DATE \_\_\_\_\_  
 DBA: HAMMERS CONSTRUCTION  
 ADDRESS: 1411 WOOLSEY HEIGHTS COLORADO SPRINGS, 80915

**EL PASO COUNTY:**


COUNTY PLAN REVIEW IS PROVIDED ONLY FOR GENERAL CONFORMANCE WITH COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE FOR THE ACCURACY AND ADEQUACY OF THE DESIGN, DIMENSIONS, AND/OR ELEVATIONS WHICH SHALL BE CONFIRMED AT THE JOB SITE. THE COUNTY THROUGH THE APPROVAL OF THIS DOCUMENT ASSUMES NO RESPONSIBILITY FOR COMPLETENESS AND/OR ACCURACY OF THIS DOCUMENT.

FILED IN ACCORDANCE WITH THE REQUIREMENTS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE, DRAINAGE CRITERIA, AND ENGINEERING CRITERIA MANUAL AS AMENDED.

IN ACCORDANCE WITH ECM SECTION 1.12, THESE CONSTRUCTION DOCUMENTS WILL BE VALID FOR CONSTRUCTION FOR A PERIOD OF 2 YEARS FROM THE DATE SIGNED BY THE EL PASO COUNTY ENGINEER. IF CONSTRUCTION HAS NOT STARTED WITHIN THOSE 2 YEARS, THE PLANS WILL NEED TO BE RESUBMITTED FOR APPROVAL, INCLUDING PAYMENT OF REVIEW FEES AT THE PLANNING AND COMMUNITY DEVELOPMENT DIRECTOR'S DISCRETION.

JENNIFER IRVINE, P.E. DATE  
 COUNTY ENGINEER / ECM ADMINISTRATOR

LOT 14

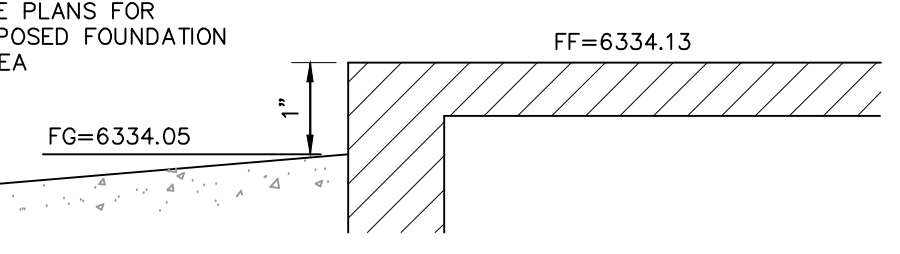


GRADING & EROSION CONTROL PLAN  
 MASTER BLASTER  
 JOB NO. 44-029  
 DATE PREPARED: NOVEMBER 2, 2017  
 DATE REVISED: FEBRUARY 13, 2018



20 BOULDER CRESCENT, SUITE 110  
 COLORADO SPRINGS, CO 80903  
 PHONE: 719.955.5485




**Concrete Washout Area (CWA) MM-1**

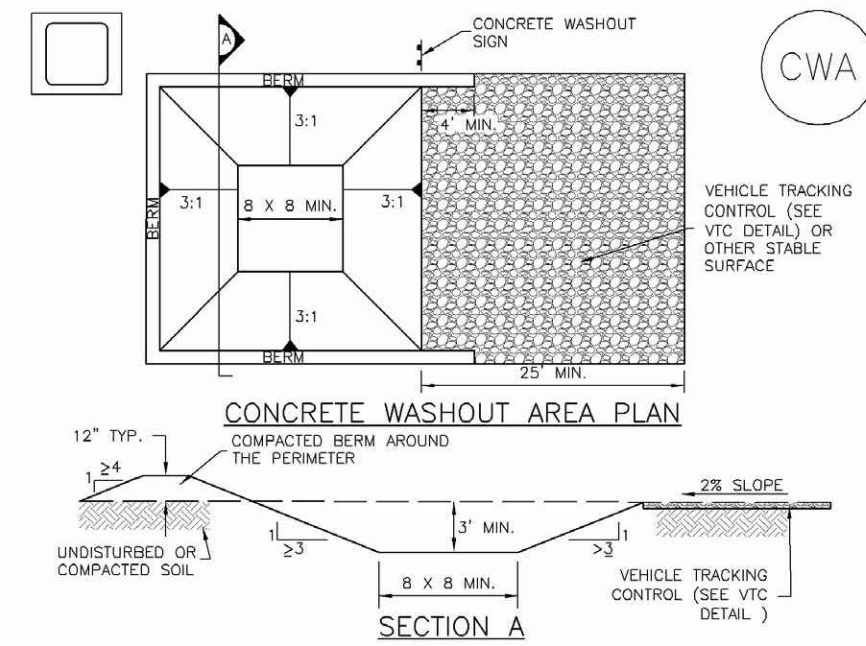

- CWA-1. CONCRETE WASHOUT AREA**  
CWA INSTALLATION NOTES
- SEE PLAN VIEW FOR CWA INSTALLATION LOCATION.
  - DO NOT LOCATE AN UNLINED CWA WITHIN 400' OF ANY NATURAL DRAINAGE PATHWAY OR WATERBODY. DO NOT LOCATE WITHIN 1,000' OF ANY WELLS OR DRINKING WATER SOURCES. IF SITE CONSTRAINTS MAKE THIS INFEASIBLE, OR IF HIGHLY PERMEABLE SOILS EXIST ON SITE, THE CWA MUST BE INSTALLED WITH AN IMPERMEABLE LINER (18 MIL MIN. THICKNESS) OR SURFACE STORAGE ALTERNATIVES USING PREFABRICATED CONCRETE WASHOUT DEVICES OR A LINED ABOVE GROUND STORAGE ARE SHOULD BE USED.
  - THE CWA SHALL BE INSTALLED PRIOR TO CONCRETE PLACEMENT ON SITE.
  - CWA SHALL INCLUDE A FLAT SURFACE WITH THAT IS AT LEAST 8" BY 8" SLOPES LEADING OUT OF THE SUBSURFACE PIT SHALL BE 3:1 OR FLATTER. THE PIT SHALL BE AT LEAST 3' DEEP.
  - BERM SURROUNDING SIDES AND BACK OF THE CWA SHALL HAVE MINIMUM HEIGHT OF 1'.
  - VEHICLE TRACKING PAD SHALL BE SLOPED 2% TOWARDS THE CWA.
  - SIGNS SHALL BE PLACED AT THE CONSTRUCTION ENTRANCE, AT THE CWA, AND ELSEWHERE AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CWA TO OPERATORS OF CONCRETE TRUCKS AND PUMP TRUCKS.
  - USE EXCAVATED MATERIAL FOR PERIMETER BERM CONSTRUCTION.


November 2010 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 CWA-3

**Vehicle Tracking Control (VTC) SM-4**

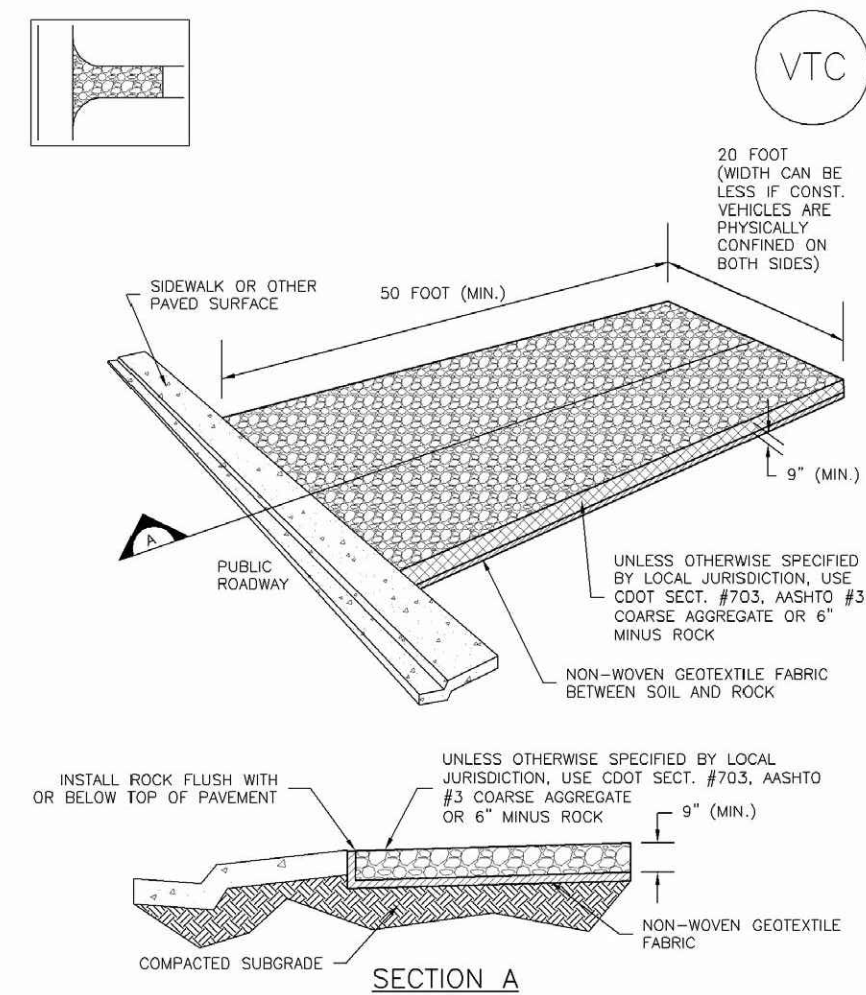


November 2010 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 VTC-3

**Silt Fence (SF) SC-1**

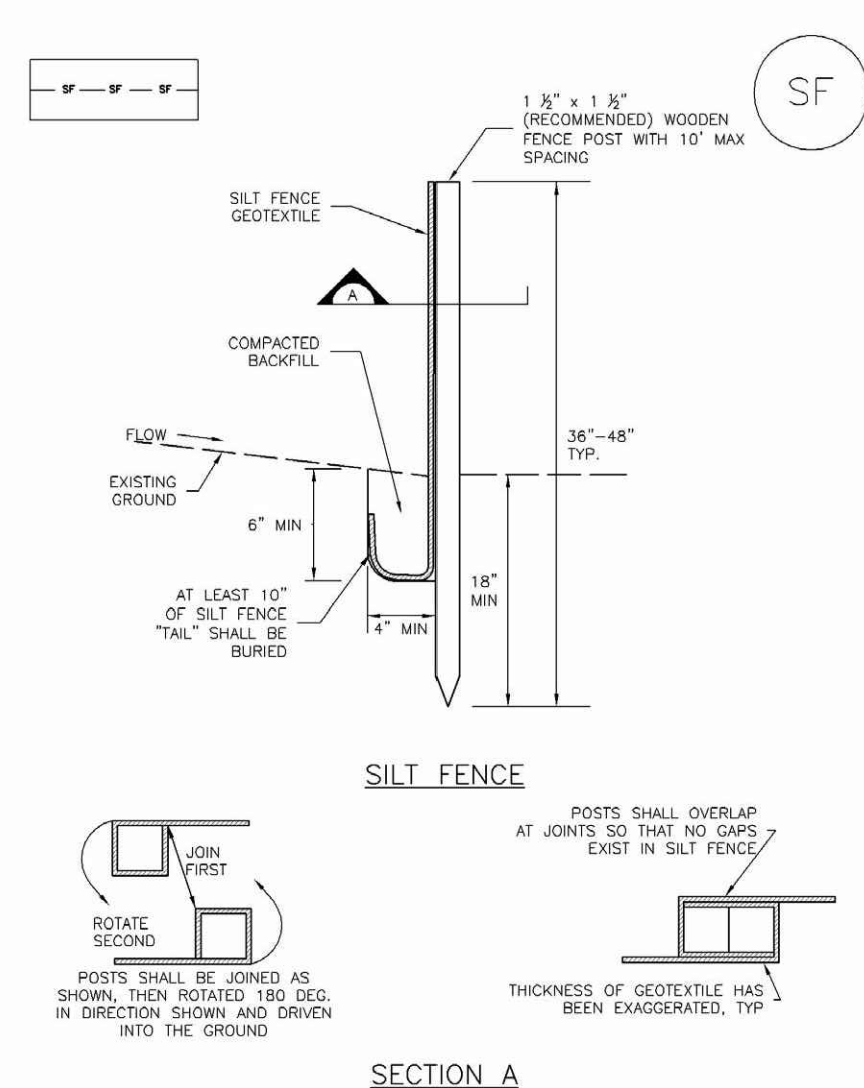

November 2010 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 SF-3

**Permeable Pavement Systems T-10**

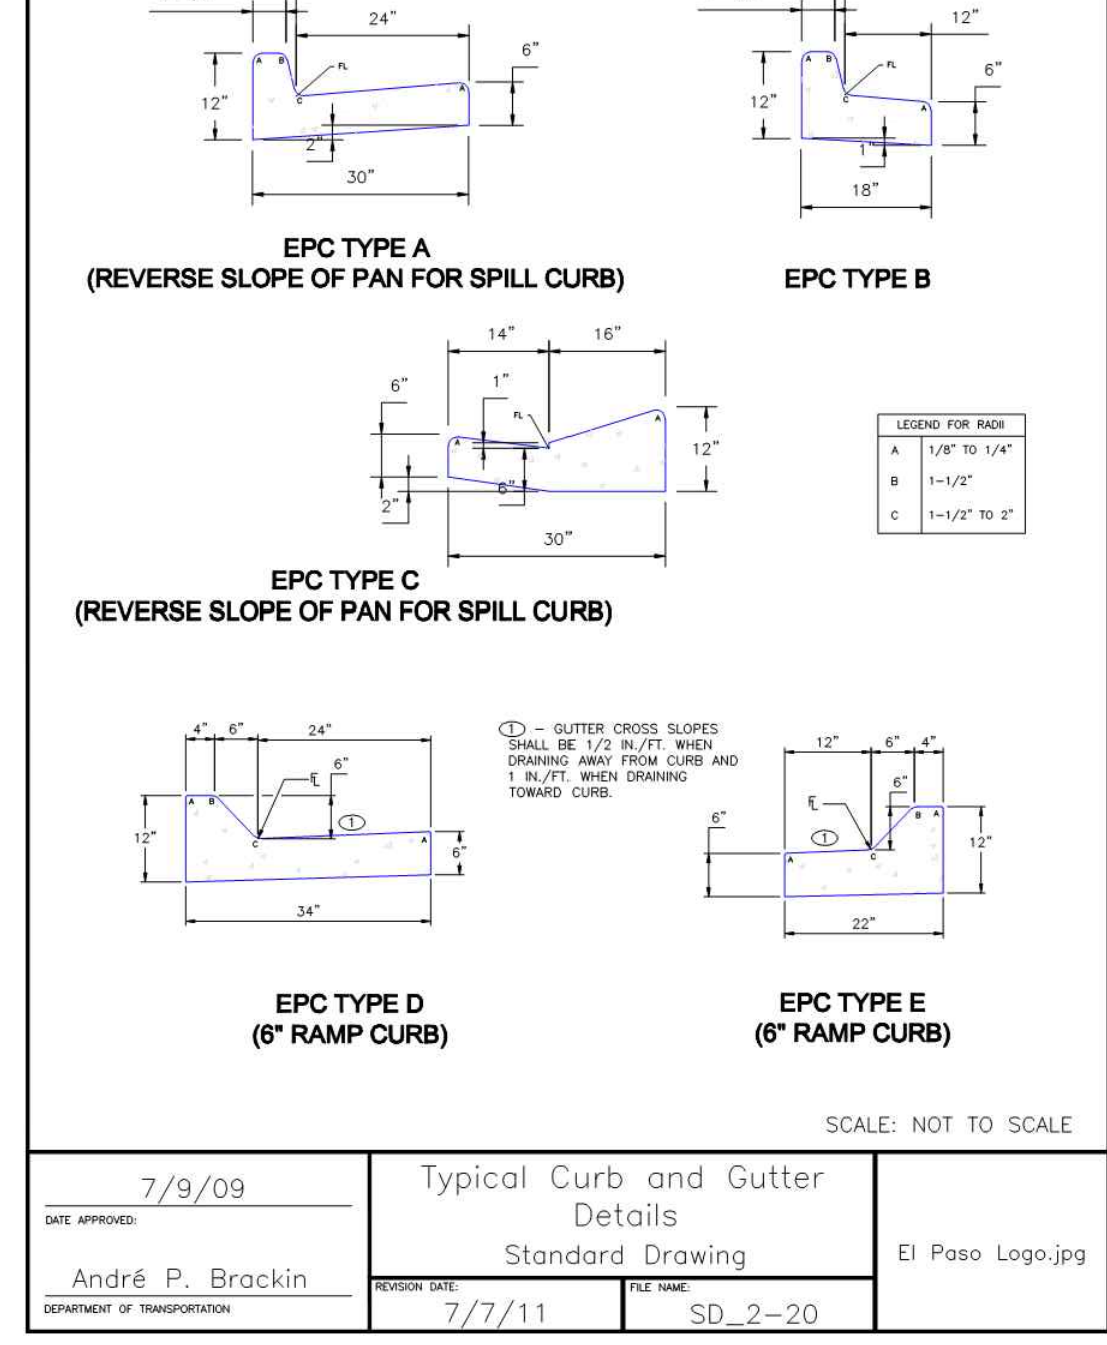

7/9/09 Typical Curb and Gutter Details Standard Drawing El Paso Logo.jpg  
DATE APPROVED: André P. Brackin  
DESIGNER: 7/7/11 FILE NAME: SD\_2-20

**Permeable Pavement Systems T-10**

**Table PPS-1. Gradation Specifications for Class C Filter Material** (Source: CDOT Table 703-7)

Sieve Size	Mass Percent Passing Square Mesh Sieves
19.0 mm (3/4")	100
4.75 mm (No. 4)	60 - 100
300 µm (No. 50)	10 - 30
150 µm (No. 100)	0 - 10
75 µm (No. 200)	0 - 3

**Table PPS-2. Dimensions for Slotted Pipe**

Pipe Diameter	Slot Length <sup>1</sup>	Maximum Slot Width	Slot Centers <sup>1</sup>	Open Area <sup>1</sup> (per foot)
4"	1-1/16"	0.032"	0.413"	1.90 in <sup>2</sup>
6"	1-3/8"	0.032"	0.516"	1.98 in <sup>2</sup>

- Some variation in these values is acceptable and is expected from various pipe manufacturers. Be aware that both increased slot length and decreased slot centers will be beneficial to hydraulics but detrimental to the structure of the pipe.
- Compact the filter layer using a vibratory drum roller or plate. The top of each layer below the leveling course must be uniform and should not deviate more than a 1/8 inch when a 10-foot straight edge is laid on its surface. The top of the leveling course should not deviate more than 3/8 inch in 10 feet.
7. **Impermeable Geomembrane Liner and Geotextile Separator Fabric:** For no-infiltration sections, install a 30 mil (minimum) PVC geomembrane liner, per Table PPS-4, on the bottom and sides of the basin, extending up at least to the top of the filter layer. Provide at least 9 inches (12 inches if possible) of cover over the membrane where it is attached to the wall to protect the membrane from UV deterioration. The geomembrane should be field-seamed using a dual track welder, which allows for non-destructive testing of almost all field seams. A small amount of single track and/or adhesive seaming should be allowed in limited areas to seam around pipe perforations, to patch seams removed for destructive seam testing, and for limited repairs. The liner should be installed with slack to prevent tearing due to backfill, compaction, and settling. Place CDOT Class B geotextile separator fabric, per Table PPS-3, above the geomembrane to protect it from being punctured during the placement of the filter material above the liner. If the subgrade contains angular rocks or other material that could puncture the geomembrane, smooth-roll the surface to create a suitable surface. If smooth-rolling the surface does not provide a suitable surface, also place the separator fabric between the geomembrane and the underlying subgrade. This should only be done when necessary because fabric placed under the geomembrane can increase seepage losses through pinholes or other geomembrane defects. Connect the geomembrane to perimeter concrete walls around the basin perimeter, creating a watertight seal between the geomembrane and the walls using a continuous batter bar and anchor connection (see Figure PPS-5). Where the need for the impermeable

August 2013 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 PPS-11

**EC-2 Temporary and Permanent Seeding (TS/PS)**

Table TS/PS-2. Minimum Drill Seeding Rates for Perennial Grasses

Common Name	Botanical Name	Growth Season <sup>1</sup>	Growth Form	Seeds/ Pound	Pounds of PLS/acre
<b>Alkali Soil Seed Mix</b>					
Alkali sacaton	<i>Sporobolus airoides</i>	Cool	Bunch	1,750,000	0.25
Basin wildrye	<i>Elymus cinereus</i>	Cool	Bunch	165,000	2.5
Soda streambank wheatgrass	<i>Agropyron repens</i> 'Soda'	Cool	Sod	170,000	2.5
Junc tall wheatgrass	<i>Agropyron elongatum</i> 'Junc'	Cool	Bunch	79,000	7.0
Archa western wheatgrass	<i>Agropyron amabilis</i> 'Archa'	Cool	Sod	110,000	5.5
<b>Total</b>					<b>17.75</b>
<b>Fertile Loamy Soil Seed Mix</b>					
Ephraim crested wheatgrass	<i>Agropyron cristatum</i> 'Ephraim'	Cool	Sod	175,000	2.0
Dural hard fescue	<i>Festuca ovina</i> 'Aravacola'	Cool	Bunch	565,000	1.0
Lincoln smooth brome	<i>Bromus inermis</i> 'Leys'	Cool	Sod	130,000	3.0
Soda streambank wheatgrass	<i>Agropyron repens</i> 'Soda'	Cool	Sod	170,000	2.5
Archa western wheatgrass	<i>Agropyron amabilis</i> 'Archa'	Cool	Sod	110,000	7.0
<b>Total</b>					<b>15.5</b>
<b>High Water Table Soil Seed Mix</b>					
Meadow foxtail	<i>Setoparus pratensis</i>	Cool	Sod	900,000	0.5
Redtop	<i>Agrostis alba</i>	Warm	Open sod	5,000,000	0.25
Road oatgrass	<i>Phalaris arvensis</i>	Cool	Sod	48,000	0.5
Lincoln smooth brome	<i>Bromus inermis</i> 'Leys'	Cool	Sod	130,000	3.0
Pathfinder switchgrass	<i>Panicum virgatum</i> 'Pathfinder'	Warm	Sod	389,000	1.0
Albar tall wheatgrass	<i>Agropyron elongatum</i> 'Albar'	Cool	Bunch	79,000	5.5
<b>Total</b>					<b>10.75</b>
<b>Transition Turf Seed Mix<sup>2</sup></b>					
Riverbank Canada thistlegrass	<i>Poa compressa</i> 'Riverside'	Cool	Sod	2,500,000	0.5
Dural hard fescue	<i>Festuca ovina</i> 'Aravacola'	Cool	Bunch	565,000	1.0
Citation perennial ryegrass	<i>Lolium perenne</i> 'Citation'	Cool	Sod	247,000	3.0
Lincoln smooth brome	<i>Bromus inermis</i> 'Leys'	Cool	Sod	130,000	3.0
<b>Total</b>					<b>7.5</b>

TS/PS-4 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

**Temporary and Permanent Seeding (TS/PS) EC-2**


Table TS/PS-2. Minimum Drill Seeding Rates for Perennial Grasses (cont.)

Common Name	Botanical Name	Growth Season <sup>1</sup>	Growth Form	Seeds/ Pound	Pounds of PLS/acre
<b>Sandy Soil Seed Mix</b>					
Blue grama	<i>Bouteloua gracilis</i>	Warm	Sod-forming bunchgrass	825,000	0.5
Campier little bluestem	<i>Schizolobium scoparium</i> 'Campier'	Warm	Bunch	240,000	1.0
Prairie sandreed	<i>Calamagrostis longifolia</i>	Warm	Open sod	274,000	1.0
Sand dropseed	<i>Sporobolus vaginifolius</i>	Cool	Bunch	5,298,000	0.25
Vaughn sidecoast grama	<i>Bouteloua curtipendula</i> 'Vaughn'	Warm	Sod	191,000	2.0
Archa western wheatgrass	<i>Agropyron amabilis</i> 'Archa'	Cool	Sod	110,000	5.5
<b>Total</b>					<b>10.25</b>
<b>Heavy Clay, Rocky Foothill Seed Mix</b>					
Ephraim crested wheatgrass <sup>3</sup>	<i>Agropyron cristatum</i> 'Ephraim'	Cool	Sod	175,000	1.5
Odin Intermediate wheatgrass	<i>Agropyron intermedium</i> 'Odin'	Cool	Sod	115,000	5.5
Vaughn sidecoast grama <sup>4</sup>	<i>Bouteloua curtipendula</i> 'Vaughn'	Warm	Sod	191,000	2.0
Lincoln smooth brome	<i>Bromus inermis</i> 'Leys'	Cool	Sod	130,000	3.0
Archa western wheatgrass	<i>Agropyron amabilis</i> 'Archa'	Cool	Sod	110,000	5.5
<b>Total</b>					<b>17.5</b>

- <sup>1</sup> All of the above seeding rates and rates are based on drill seeding followed by crimped straw mulch. These rates should be doubled if seed is broadcast and should be increased by 50 percent if the seeding is done using a Brillion Drill or is applied through hydraulic seeding. Hydraulic seeding may be substituted for drilling only when slopes are steeper than 3:1. If hydraulic seeding is used, hydraulic mulching should be done as a separate operation.
- <sup>2</sup> See Table TS/PS-3 for seeding dates.
- <sup>3</sup> If site is to be irrigated, the transition turf seed rates should be doubled.
- <sup>4</sup> Crested wheatgrass should not be used on slopes steeper than 0H to 1V.
- <sup>5</sup> Can substitute 0.5 lbs PLS of blue grama for the 2.0 lbs PLS of Vaughn sidecoast grama.

June 2012 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 TS/PS-5

**T-10 Permeable Pavement Systems**

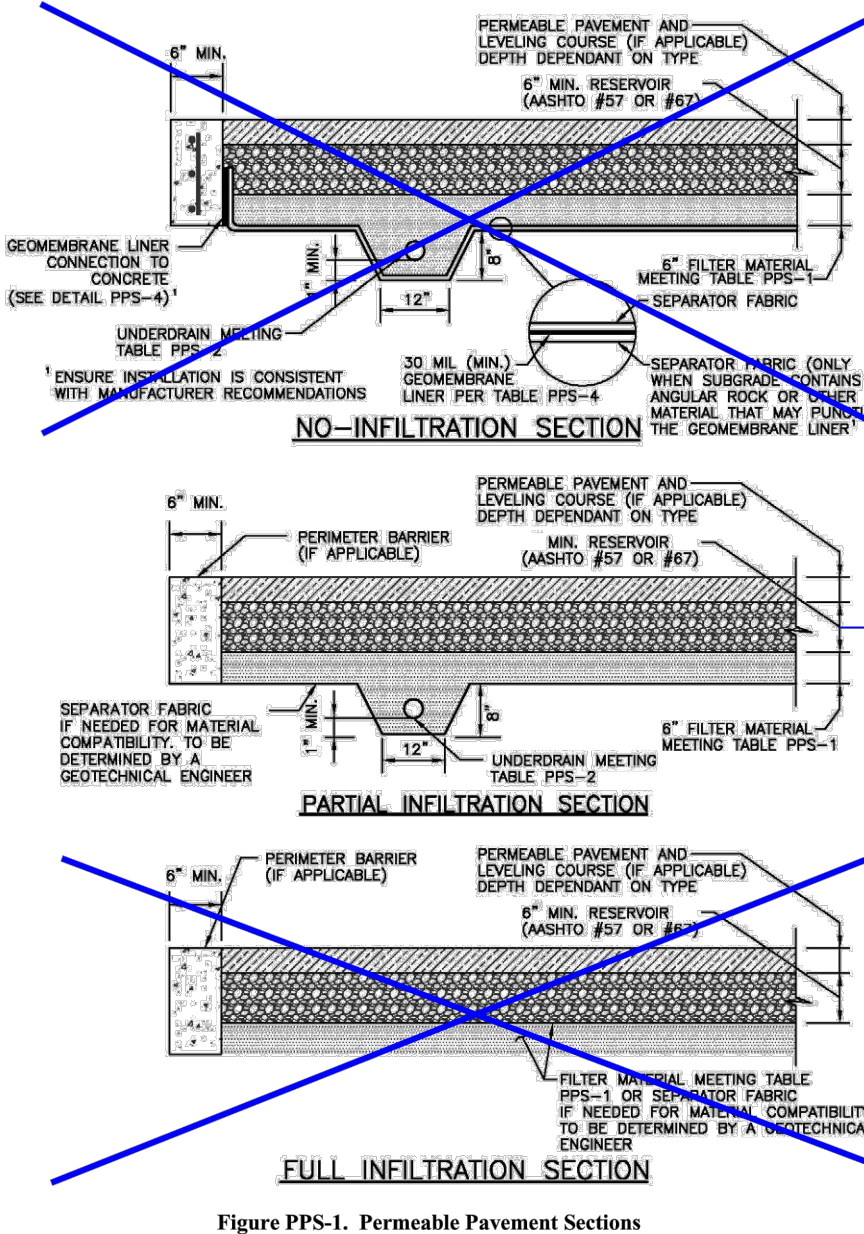

PPS-6 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 August 2013

**T-10 Permeable Pavement Systems**

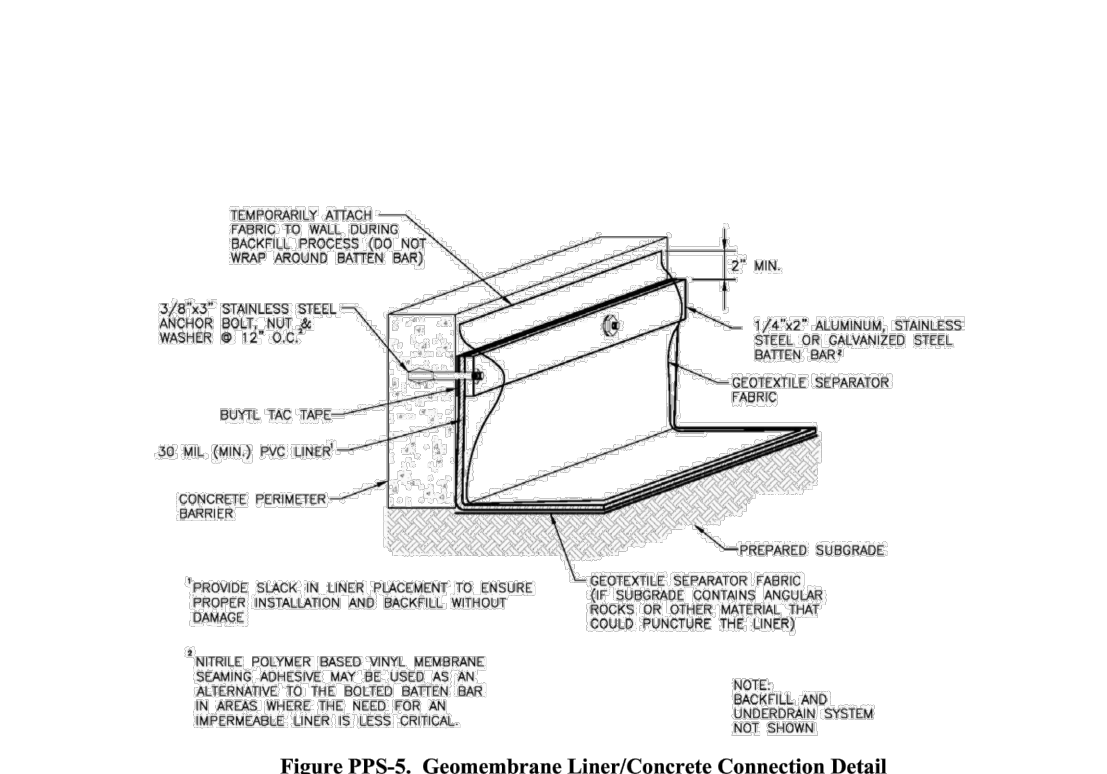


Figure PPS-5. Geomembrane Liner/Concrete Connection Detail

PPS-16 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 August 2013

**Permeable Pavement Systems T-10**

- Call for construction fence on the plans around pervious areas where infiltration rates need to be preserved and could be reduced by compaction from construction traffic or storage of materials.
- Example Construction Drawing Notes**
- Excavation of subgrade shall not commence until after the pre-construction meeting.
  - Subgrade shall be excavated using low ground pressure (LGP) track equipment to minimize over compaction of the subgrade.<sup>1</sup>
  - Grading and compaction equipment used in the area of the permeable pavement should be approved by the engineer prior to use.
  - Loose materials shall not be stored on the permeable pavement area.
  - The contractor shall, at all times during and after system installation, prevent sediment, debris, and dirt from any source from entering the permeable pavement system.
  - Placement of the wearing course shall be performed after fine grading and landscaping in adjacent areas is complete. If the wearing course becomes clogged due to construction activities, clean the surface with a vacuum machine to restore the infiltration rate after construction is complete.
- <sup>1</sup> For partial and full infiltration sections only.

**Design Procedure and Criteria**

Note: This manual includes a variety of specific pavements, which are discussed and distinguished in supplemental BMP Fact Sheets T-10.1, T-10.2, etc. This BMP Fact Sheet outlines the design procedure and other design components and considerations that are common to all of the systems. Review of the supplemental Fact Sheets is recommended to determine the appropriate pavement for a specific site or use.


- Subsurface Exploration and Determination of a No-Infiltration, Partial Infiltration, or Full Infiltration Section.** Permeable pavements can be designed with three basic types of sections. The appropriate section will depend on land use and activities, proximity to adjacent structures and soil characteristics. Sections of each installation type are shown in Figure PPS-1.
  - No-Infiltration Section:** This section includes an underdrain and an impermeable liner that prevents infiltration of stormwater into the subgrade soils. Consider using this section when any of the following conditions exist:
    - Land use or activities could contaminate groundwater if stormwater is allowed to infiltrate.
    - Permeable pavement is located over potentially expansive soils or bedrock that could swell due to infiltration and potentially damage the permeable pavement system or adjacent structures (e.g., building foundation or conventional pavement).

August 2013 Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 PPS-3



Markup Summary

gwillard (1)



**Subject:** Text Box  
**Page Label:** 27  
**Lock:** Unlocked  
**Author:** gwillard

A 6" CONCRETE CURB SHALL ENCLOSE  
AROUND THE PERMABLE PAVER'S EDGE

dsdlaforce (3)



**Subject:** Callout  
**Page Label:** 2  
**Lock:** Unlocked  
**Author:** dsdlaforce

El Paso County Criteria Manual  
Unresolved.



**Subject:** Cloud+  
**Page Label:** 2  
**Lock:** Unlocked  
**Author:** dsdlaforce

Replace with the County standard statement:  
The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief.  
Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the applicable master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.  
Unresolved.



**Subject:** Callout  
**Page Label:** 2  
**Lock:** Unlocked  
**Author:** dsdlaforce

Update and include the LOMR:  
... and as amended by the FEMA approved Letter of Map Revision (LOMR) case number \_\_\_\_\_ dated \_\_\_\_\_...  
Unresolved. Include the case number.

AutoCAD SHX Text (406)

- C5

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

C5

EXISTING CONTOUR  
PROP CONTOUR  
EXISTING STORM S

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP CONTOUR

- ② LONG TYPE VERTICAL RIPR, 1.5' DEEP. FILL VOIDS WITH MATERIAL
- ③ 5'X3" NOTCH IN CURB (EMERGENCY OUTFALL)
- ④ INSTALL 2' WIDE GUTTER PAN @ 0.8% FROM EX CURB TO EX CURB

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

5'X3" NOTCH IN CURB (EMERGENCY OUTFALL)



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

H.P.

(6332)

**Subject:**  
**Page Label:** [1] SHT 1 GRADING (6332)  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6" SOILD PVC @ 1.0%  
DAYLIGHT TO CHANNEL  
= INV=25.4 +/-

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6" SOILD PVC @ 1.0%, DAYLIGHT TO CHANNEL  
**Lock:** Unlocked = INV=25.4 +/-  
**Author:** AutoCAD SHX Text

1

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

C100

**Subject:**  
**Page Label:** [1] SHT 1 GRADING C100  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EXISTING STORM SEWER PIPE  
INLET  
EXISTING FLOW DIRECTION  
ARROW  
FLOW DIRECTION  
HIGH POINT

**Subject:**  
**Page Label:** [1] SHT 1 GRADING EXISTING FLOW DIRECTION ARROW  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PVC UNDERDRAIN=25.83  
END PERFORATED PVC  
BEGIN SOLID PVC TO  
CHANNEL

**Subject:**  
**Page Label:** [1] SHT 1 GRADING PVC UNDERDRAIN=25.83 END PERFORATED  
**Lock:** Unlocked PVC BEGIN SOLID PVC TO CHANNEL  
**Author:** AutoCAD SHX Text

Z

**Subject:**  
**Page Label:** [1] SHT 1 GRADING Z  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1" =

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1" =  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

MASTER BLASTER  
CLATSOP COUNTY STATE OF OREGON  
LOT 35 OF CLAREMONT BUSINESS PARK, PL. NO. 2  
PROPOSED DRAINAGE MAP


**Subject:**  
**Page Label:** [1] SHT 1 GRADING LOT 35 OF CLAREMONT BUSINESS PARK FIL.  
**Lock:** Unlocked NO. 2  
**Author:** AutoCAD SHX Text

6/

20'

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

20'



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

R=1020.00'

2

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

2

- ① 6.5" TO 4" WIDE (VARIES) X 6-7' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL.
- ② 7.5" TO 3.5" WIDE (VARIES) X 9.5' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL.
- ③ 5X3" NOTCH IN CURB (EMERGENCY OUTFALL)
- ④ INSTALL 3" WIDE GUTTER
- ⑤ DRAIN IN 1" WIDE EDGEM

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

7.5' TO 3.5' WIDE (VARIES) X 9.5' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL

CURRENT DEVELOPME  
EXISTING CONTOUR  
PROP CONTOUR


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EXISTING CONTOUR

LEGEND


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

%%uLEGEND




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

B



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

MCCLAIN POINT



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

N 33%%D26'48" E

— (6920) —

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

(6920)

SITE

Subject: SITE  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

L.P.  
X

Subject: L.P.  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

MASTER BLASTER  
EL PASO COUNTY, STATE OF COLORADO  
LOT 21 OF CLAREMONT BUSINESS PARK (L.P. NO. 2)  
PROPOSED DRAINAGE MAP

Subject: EL PASO COUNTY, STATE OF COLORADO  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

ALL DOWNSPOUTS SHALL BE DIRECTED TO WATER QUALITY FACILITY

Subject: ALL DOWNSPOUTS SHALL BE DIRECTED TO WATER QUALITY FACILITY  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

INLET

Subject: INLET  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

-(6330)-

Subject: (6330)  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

3

Subject: 3  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

LOT 21

Subject: LOT 21  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

0.37

Subject: 0.37  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

EXISTING CONTOUR  
PROP CONTOUR  
EXISTING STORM SEWER PIPE  
INLET  
EXISTING FLOW DIRECTION  
ARROW

Subject: EXISTING STORM SEWER PIPE  
Page Label: [1] SHT 1 GRADING  
Lock: Unlocked  
Author: AutoCAD SHX Text

LOT 14

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 14



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

(6330)

- ③ 5'X3" NOTCH IN CURB (EMERGENCY OUTFALL)
- ④ INSTALL 2' WIDE GUTTER PAN @ 0.8% FROM EX CURB TO EX CURB


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

INSTALL 2' WIDE GUTTER PAN @ 0.8% FROM EX CURB TO EX CURB

SHEET 1 OF 1

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

SHEET 1 OF 1



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

COLE VIEW

- SURFACE DESIGN POINT
- ▬ CURRENT DEVELOPMENT BASIN BOUNDARY
- EXISTING CONTOUR
- PROP CONTOUR
- ▬ EXISTING STORM SEWER PIPE

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

CURRENT DEVELOPMENT BASIN BOUNDARY

ACRES

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

ACRES

10


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

10



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

L.P.



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP 25'X30' DRAINAGE AND MAINTENANCE ESMT BY SEPARATE DOCUMENT

H.P.  
X

**Subject:**  
**Page Label:** [1] SHT 1 GRADING H.P.  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

40


**Subject:**  
**Page Label:** [1] SHT 1 GRADING 40  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING (6334)  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FLOW DIRECTIC  
HIGH POINT  
LOW POINT

**Subject:**  
**Page Label:** [1] SHT 1 GRADING HIGH POINT  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 0.06  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6331  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6332  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6334  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

- ① 8.5' TO 4' WIDE (VARIES) X 6.7' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP, FILL VOIDS WITH FILTER MATERIAL.
- ② 7.5' TO 3.5' WIDE (VARIES) X 8.5' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP, FILL VOIDS WITH FILTER MATERIAL.

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 8.5' TO 4' WIDE (VARIES) X 6.7' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

**Subject:**  
**Page Label:** [1] SHT 1 GRADING EL PASO COUNTY FILE NO. PPR 17-056  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

750 SF PERMEABLE PAVEMENT WQ  
TREATMENT FACILITY W/ 6" PERIMETER  
CURB/BARRIER AROUND PAVERS EDGE

LOT 34


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 34




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

MARKSHEFFEL BLVD




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

221.14'



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

2




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3

LOT 36


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 36



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

.96



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6333



SAND CREEK  
BASE FLOOD  
EL= 6326.5-6327.5

**Subject:** SAND CREEK  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

CREEK  
BASE FLOOD EL=  
6326.5-6327.5  
(6330)

**Subject:** BASE FLOOD EL= 6326.5-6327.5  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

HWY 24

**Subject:** HWY 24  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

A

**Subject:** A  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6920

**Subject:** 6920  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

.90

**Subject:** .90  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

N 56°31'58" W  
DOWN  
DIR

**Subject:** N 56%%D31'58" W  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LEGEN

BASIN DESIGNATION


**Subject:** BASIN DESIGNATION  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

HWY 94

**Subject:** HWY 94  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

20

**Subject:** 20  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** MEADOWBROOK PARKWAY  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** L.P.  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** COLE VIEW  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** LOW POINT  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

-6331-


-----  
**Subject:** 6331  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** COLE VIEW  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** 4  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** FLOW DIRECTION  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** 1  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** Scale in Feet  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




Subject: 6330  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: 220.21'  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: N 56% D31'58" W  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: .25  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text

DRAINAGE MAP  
 MASTER BLASTER  
 JOB NO. 44-029  
 DATE PREPARED: OCTOBER 27, 2017  
 DATE REVISED: FEBRUARY 13, 2018  
 EL PASO COUNTY FILE NO. PPF


Subject: DRAINAGE MAP MASTER BLASTER JOB NO.  
 Page Label: [1] SHT 1 GRADING 44-029 DATE PREPARED: OCTOBER 27, 2017  
 Lock: Unlocked DATE REVISED: FEBRUARY 13, 2018  
 Author: AutoCAD SHX Text



Subject: (6332)  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: .20  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: 25  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text

SURFACE DESIGN POINT

CURRENT DEVELOPMENT BAS


Subject: SURFACE DESIGN POINT  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: (6334)  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text

|||  
N.T.S.

Subject:  
Page Label: [1] SHT 1 GRADING N.T.S.  
Lock: Unlocked  
Author: AutoCAD SHX Text



Subject:  
Page Label: [1] SHT 1 GRADING L=100.05'  
Lock: Unlocked  
Author: AutoCAD SHX Text

.15

Subject:  
Page Label: [1] SHT 1 GRADING .15  
Lock: Unlocked  
Author: AutoCAD SHX Text

2

Subject:  
Page Label: [1] SHT 1 GRADING 2  
Lock: Unlocked  
Author: AutoCAD SHX Text

L.P.

Subject:  
Page Label: [1] SHT 1 GRADING L.P.  
Lock: Unlocked  
Author: AutoCAD SHX Text

.35

Subject:  
Page Label: [1] SHT 1 GRADING .35  
Lock: Unlocked  
Author: AutoCAD SHX Text

0

Subject:  
Page Label: [1] SHT 1 GRADING 0  
Lock: Unlocked  
Author: AutoCAD SHX Text




Subject:  
Page Label: [1] SHT 1 GRADING 6332  
Lock: Unlocked  
Author: AutoCAD SHX Text

VICINITY MAP  
N.T.S.

Subject:  
Page Label: [1] SHT 1 GRADING %%UVICINITY MAP  
Lock: Unlocked  
Author: AutoCAD SHX Text



Subject:  
Page Label: [1] SHT 1 GRADING 6333  
Lock: Unlocked  
Author: AutoCAD SHX Text



Cc

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 100.00'  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 4  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING (6332)  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING SETBACK  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1.97%%  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING N 33%%D26'48\"/>




**Subject:**  
**Page Label:** [1] SHT 1 GRADING PROP FENCE  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 25'  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING FG=34.05  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX CURB FL=31.40 LIP=31.57  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



Subject: 6330  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: 7' UTILITY ESMT  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: FG=33.05  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: ELEC METER  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: FL=33.15  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: 7.50%%  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: 1.0%%  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: CWA  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: 1.25%%  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: SF  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




**Subject:** 1.25%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** 1' EXPOSED FOUNDATION  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** SEE PARTIAL INFILTRATION SECTION FOR PERMEABLE PAVEMENT SYSTEM W/ 6" PERIMETER CURB/BARRIER AROUND EDGE (750 SF)  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EX FN=30.55  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EX FN= 30.70  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** FG=30.96  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EX 1.9%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** 5.43%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

20

**Subject:** 20  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EX FN=30.83  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 0.5%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

GRADING & EROSION CONTROL PLAN  
MASTER BLASTER  
JOB NO. 44-029  
DATE PREPARED: NOVEMBER 2, 2017  
DATE REVISED: FEBRUARY 13, 2018  
EL PASO COUNTY FILE NO. PPF


**Subject:** GRADING & EROSION CONTROL PLAN  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text  
MASTER BLASTER JOB NO. 44-029 DATE  
PREPARED: NOVEMBER 2, 2017 DATE  
REVISED: FEBRUARY 13, 2018




**Subject:** EX CURB FL=30.97  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

JENNIFER IRVINE, P.E.  
COUNTY ENGINEER / ECM ADMINISTRATOR

**Subject:** COUNTY ENGINEER / ECM ADMINISTRATOR  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** FL=33.24  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** PVC UNDERDRAIN=25.83 END PERFORATED  
PVC BEGIN SOLID PVC TO CHANNEL  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX CHANNEL TOP=29.30  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX CHANNEL TOP=28.42  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX TOE =22.3 +/-  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3


**Subject:** 3  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



FOR ALL SPECIAL CONTRACTS, SEE ATTACHED FOR ALL ON BEHALF OF M & S CIVIL CONSULTANTS, INC.  
OWNER/DEVELOPER'S STATEMENT  
I HEREBY CERTIFY THAT I AM AN INDIVIDUAL AND NOT AN EMPLOYEE OF ANY OTHER PERSON OR ENTITY.


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

VIRGIL A. SANCHEZ, COLORADO P.E. #37160  
FOR AND ON BEHALF OF M & S CIVIL  
CONSULTANTS, INC.



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

TC=33.26




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=30.12 LIP=30.24




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

%%UBUILDING FINISH FLOOR DETAIL




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL= 31.32



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX 12" WATER



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

VTC

10


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

10

EX MIN CONT  
PROP MAJ CONT  
PROP MIN CONT


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP MAJ CONT



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


(6332)



-----  
**Subject:** EX CURB FL=30.70 LIP=30.87  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 21

-----  
**Subject:** LOT 21  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** FL=32.72  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** EX 30" STORM MH  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

- 4.90%

-----  
**Subject:** 4.90%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** TBC=30.36  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** CALL 1-800-922-1987  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** EX FENCE  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** EX STORM INLET  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


EXISTING  
FLOWLINE  
TOP OF CURB

-----  
**Subject:** FLOWLINE  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOW POINT  
HIGH POINT


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOW POINT




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1.25%%%



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=29.43 LIP=29.56



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=33.02




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6331



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX 12" WATER



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EOA



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

(6334)

③ 5'X3" NOTCH IN CURB  
(EMERGENCY OUTFALL)

④ INSTALL 2' WIDE GUTTER  
PAN @ 0.8% FROM  
EX CURB TO EX CURB

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

INSTALL 2' WIDE GUTTER PAN @ 0.8% FROM  
EX CURB TO EX CURB


**LEGEND**

**Subject:** %%%uLEGEND  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


**SECTION A-A**  
NTS




**Subject:** SECTION A-A  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** 5.39%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EX FN=31.14  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EDGE=29.86  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 0.5%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** B-B  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** COLE VIEW  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** MCCLAIN POINT  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP MAJ CONT  
PROP MIN CONT  
LOW POINT

**Subject:** PROP MIN CONT  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 0.5%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** N 56%%D31'58" W  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX CHANNEL TOP=30.29  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

0

**Subject:** 0  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

TOF

**Subject:** TOF  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

(SF)


**Subject:** SF  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

- FOR LOCATING
- SILT FENCE
- VEHICLE TRACKING CONTROL
- CONCRETE WASH-OUT BASIN


**Subject:** VEHICLE TRACKING CONTROL  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** FOR BURIED UTILITY INFORMATION  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX LIP =29.38  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** PROP TYPE "B" CURB AND GUTTER (SPILL)  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1.17%%  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6333  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING FG=34.05  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING FG= 30.56  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING FL=31.23  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING FL= 31.71  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING LP=29.89  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1' EXPOSED FOUNDATION  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING SECTION B-B  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING PROP ASPHALT PARKING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

4

EX MAJ CONT

EX MIN CONT

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX MAJ CONT

10 20  
Scale in Feet


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

Scale in Feet

NTS


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

NTS



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=29.29 LIP=29.42



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=31.06 LIP=31.23



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

THIS GRADING AND EROSION CONTROL PLAN WAS PREPARED UNDER MY DIRECTION AND SUPERVISION AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. SAID PLAN HAS BEEN PREPARED ACCORDING TO THE CRITERIA ESTABLISHED BY THE COUNTY FOR GRADING AND EROSION CONTROL PLANS. I ACCEPT RESPONSIBILITY FOR ANY LIABILITY CAUSED BY NEGLIGENT ACTS, ERRORS OR OMISSIONS ON MY PART IN PREPARING THIS PLAN.



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3.08%%

RIMETER BAR  
6" CURB

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6" CURB




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

HP

VEHICLE TRACKING CONTROL  
 CONCRETE WASH-OUT BASIN


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

CONCRETE WASH-OUT BASIN




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB & GUTTER




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP 25'X30' DRAINAGE AND MAINTENANCE  
 ESMT BY SEPARATE DOCUMENT




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FG=34.05




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

\*\* SEE PLANS FOR SEE PLANS FOR EXPOSED  
 FOUNDATION AREA




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

GAS METER



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX 8" SEWER



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


EX CURB

VEHICLE TRACKING CONTROL  
 CONCRETE WASH-OUT BASIN  
 EL PASO COUNTY FILE NO. PPR 17-056


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EL PASO COUNTY FILE NO. PPR 17-056






**Subject:**  
**Page Label:** [1] SHT 1 GRADING 3.65%%  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6334  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING EDGE=29.86 TBC=30.36  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING SF  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING PROPOSED PAVERS ELV=29.86  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING 40  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX CHANNEL TOP=28.97  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING 1.25%%  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX CURB  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING FL=34.13  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** ASPHALT DRIVEWAY  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** 7.82%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX EOA=29.8  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** (6330)  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** FL=33.83  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 6331  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 0.8%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX FN=31.61  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

- ① 8.5' TO 4' WIDE (VARIES) X 6.7' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL.
- ② 7.5' TO 3.5' WIDE (VARIES) X 8.5' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL.


**Subject:** 8.5' TO 4' WIDE (VARIES) X 6.7' LONG, TYPE VL OR L RIPRAP, MIN 1.5' DEEP. FILL VOIDS WITH FILTER MATERIAL  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** PROP 25' DRIVEWAY  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text








---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 100.00'  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING 6333  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


---

ENGINEERING  
FLOWLINE  
TOP OF CURB  
FINISH GRADE  
FINISH FLOOR

---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING TOP OF CURB  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX CURB  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING SAWCUT AND REMOVE EX ASPHALT, CURB AND GUTTER.  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING FL=32.59  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING PERIMETER BARRIER  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX CHANNEL TOP=28.35  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


---



---

**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX 1.14%%  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

---



---


**Subject:**  
**Page Label:** [1] SHT 1 GRADING 2  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

---

1"

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1"



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6" PERF PVC



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

SAND CREEK CHANNEL

LP


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LP

HP

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

HP




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

6.21%%

1" =


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1" =




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=34.36




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX SEWER MH



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


31.80




Subject: PROPOSED 6,250 SF BUILDING FF=6834.13  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text

LOW POINT  
 HIGH POINT  
 EXISTING


Subject: HIGH POINT  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: FL= 31.26  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: FL=33.38  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: FL=32.25  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text

TOP OF FOOT  
 - SILT FENCE


Subject: SILT FENCE  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: CWA  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: EX CURB FL=29.87 LIP=29.99  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



Subject: FL=33.29  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text




Subject: EX 42" STORM MH  
 Page Label: [1] SHT 1 GRADING  
 Lock: Unlocked  
 Author: AutoCAD SHX Text



---

**Subject:** UNDERDRAIN  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



---

**Subject:** 6" SOILD PVC @ 1.0%, DAYLIGHT TO CHANNEL  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX

---

**Subject:** EX  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




---

**Subject:** 220.21'  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




---

**Subject:** EX TOE = 22.4 +/-  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




---

**Subject:** R=1020.00'  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




---

**Subject:** FG=6334.05  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




---

**Subject:** FF=6334.13  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



---

**Subject:** EX CURB FL=29.84  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



---

**Subject:** NOTE: ALL DOWNSPOUTS SHALL BE DIRECTED TO WATER QUALITY FACILITY  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



DATE

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

DATE

SHOWN IN THESE DETAILS PLANS AND PROFESSIONAL  
DATE \_\_\_\_\_ DATE  
DATE NUMBER FOR IDENTIFICATION  
NUMBER THAT INDICATES REVISION TO DRAWING NUMBER  
EL PASO COUNTY:  
COUNTY PLUM REVIEW IS PROVIDED ONLY FOR GENERAL USE  
COUNTY DESIGN CRITERIA. THE COUNTY IS NOT RESPONSIBLE.

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

ADDRESS: 1411 WOOLSEY HEIGHTS  
COLORADO SPRINGS, 80915

DATE \_\_\_\_\_ DATE  
OWNER/DEVELOPER'S STATEMENT:  
DATE \_\_\_\_\_ DATE  
DATE \_\_\_\_\_ DATE  
DATE \_\_\_\_\_ DATE

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

%%UOWNER/DEVELOPER'S STATEMENT:

FF

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FF

36  
A-A  
R

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

A-A

25.0' EXPOSED  
FOUNDATION  
TRANSITION

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

25.0' EXPOSED FOUNDATION TRANSITION

EX CURB

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB

DATE \_\_\_\_\_ DATE  
OWNER/DEVELOPER'S STATEMENT:  
DATE \_\_\_\_\_ DATE  
DATE \_\_\_\_\_ DATE  
DATE \_\_\_\_\_ DATE

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

I, THE OWNER/DEVELOPER HAVE READ AND  
WILL COMPLY WITH ALL OF THE  
REQUIREMENTS SPECIFIED IN THESE  
DETAILED PLANS AND SPECIFICATIONS.



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

GRADING AND EROSION CONTROL NOTES:  
1. CONSTRUCTION MAY NOT COMMENCE UNTIL A CONSTRUCTION PERMIT IS OBTAINED FROM DEVELOPMENT SERVICES AND CONSTRUCTION MAY NOT COMMENCE UNTIL A CONSTRUCTION PERMIT IS OBTAINED FROM DEVELOPMENT SERVICES AND A PRECONSTRUCTION CONFERENCE IS HELD WITH DEVELOPMENT SERVICES INSPECTIONS. 2. STORMWATER DISCHARGES FROM CONSTRUCTION SITES SHALL NOT CAUSE OR THREATEN TO CAUSE POLLUTION, STORMWATER DISCHARGES FROM CONSTRUCTION SITES SHALL NOT CAUSE OR THREATEN TO CAUSE POLLUTION, CONTAMINATION, OR DEGRADATION OF STATE WATERS. ALL WORK AND EARTH DISTURBANCE SHALL BE DONE IN A MANNER THAT MINIMIZES POLLUTION OF ANY ON-SITE OR OFF SITE WATERS, INCLUDING WETLANDS. 3. NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS TO REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING. 4. A SEPARATE STORMWATER MANAGEMENT PLAN (SMWP) FOR THIS PROJECT SHALL BE COMPLETED AND AN EROSION AND A SEPARATE STORMWATER MANAGEMENT PLAN (SMWP) FOR THIS PROJECT SHALL BE COMPLETED AND AN EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP) ISSUED PRIOR TO COMMENCING CONSTRUCTION. DURING CONSTRUCTION THE SWMP IS THE RESPONSIBILITY OF THE DESIGNATED STORMWATER MANAGER, SHALL BE LOCATED ON SITE AT ALL TIMES AND SHALL BE KEPT UP TO DATE WITH WORK PROGRESS AND CHANGES IN THE FIELD. 5. ONCE THE ESQCP HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT ONCE THE ESQCP HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT CONTROL BMPS AS INDICATED ON THE GEC. A PRECONSTRUCTION MEETING BETWEEN THE CONTRACTOR, ENGINEER, AND EL PASO COUNTY WILL BE HELD PRIOR TO ANY CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE APPLICANT TO COORDINATE THE MEETING TIME AND PLACE WITH COUNTY DSD INSPECTIONS STAFF. 6. SOIL EROSION CONTROL MEASURES FOR ALL SLOPES, CHANNELS, DITCHES, OR ANY DISTURBED LAND AREA SHALL BE SOIL EROSION CONTROL MEASURES FOR ALL SLOPES.

DATE

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

DATE

SF

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

SF



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

TC=33.75

EL VARIES  
SEE PLANS


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EL VARIES SEE PLANS



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=33.43



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP CURB

LOT 36


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 36




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX FENCE




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FG=33.05



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


EX CURB



**Subject:** EX CURB FL=29.63 LIP=29.76  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FG


**Subject:** FG  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 47.66' PRIVATE EASEMENT REC. NO. 207712506  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX LIP=29.7  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** EX CURB  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

- FINISH GRADE
- FINISH FLOOR
- TOP OF FOOTING
- SILT FENCE

**Subject:** TOP OF FOOTING  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

MASTER BLASTER  
EL PASO COUNTY, STATE OF COLORADO  
GRADING & EROSION CONTROL PLAN  
37 35 OF CLAREMONT BUSINESS PARK, FIL. NO.

**Subject:** GRADING & EROSION CONTROL PLAN  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FOR BURIED UTILITY INFORMATION  
48 HRS BEFORE YOU DIG  
CALL 1-800-922-1987  
FOR LOCATING & MARKING GAS  
ELECTRIC, WATER & TELEPHONE LINES  
WATER EMERGENCIES: 500-5000


**Subject:** ELECTRIC, WATER & TELEPHONE LINES  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

NAME:

**Subject:** NAME:  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** 4  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PROP CONCRETE PAD AND SCREEN WALL




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=33.56



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=31.11




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

221.14'



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EDGE=29.86




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=33.56



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EL PASO COUNTY, STATE OF COLORADO



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

PERIMETER BARRIER



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3.0%%%




- ② LONG, TYPE VL OR L RIPR, 1.5' DEEP. FILL VOIDS WITH MATERIAL
- ③ 5'X3" NOTCH IN CURB (EMERGENCY OUTFALL)
- ④ INSTALL 2" WIDE GUTTER PAN @ 0.8% FROM EX CURB TO EX CURB


-----  
**Subject:** 5'X3" NOTCH IN CURB (EMERGENCY OUTFALL)  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** 7259 COLE VIEW  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** EX CURB  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** FL=32.81  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** 0.00%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** 2.0%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** FL= 32.34  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** 0.5%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

TOP OF CURB  
 FINISH GRADE  
 FINISH FLOOR  
 TOP OF FOOTING


-----  
**Subject:** FINISH GRADE  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

SEE DETAIL SHEET 4

-----  
**Subject:** SEE DETAIL SHEET 4  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** 48 HRS BEFORE YOU DIG  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** CRUSHED ASPHALT  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** FL=32.21  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** 6332  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX MAJ CONT  
 EX MIN CONT  
 PROP MAJ CONT


-----  
**Subject:** EX MIN CONT  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** EX FN=31.47  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




-----  
**Subject:** EX CURB FL=31.18 LIP=31.35  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** 0.00%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text


FL

-----  
**Subject:** FL  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



-----  
**Subject:** 1.35%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text






**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3" X 5' WIDE CURB NOTCH (EMERGENCY OVERFLOW)

20'


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

20'




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

2.25%%%




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=29.20 LIP=29.33



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

EX CURB FL=30.16




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

TBC=30.36

2

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

2




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1.50%%%

NTS

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

NTS



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

10' DRAINAGE ESMT

DATE

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

DATE



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 35 OF CLAREMONT BUSINESS PARK FIL.  
NO. 2

TOP OF CURB  
FINISH GRADE  
FINISH FLOOR  
TOP OF FOOTING


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FINISH FLOOR

LOT 34


**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 34




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

1



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

L=100.05'




**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

N 56%°D31'58" W



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

8.3%%



**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

FL=33.77

LOT 14

**Subject:**  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

LOT 14



**Subject:** EX CURB FL=30.53  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** 1  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

HIGH POIN  
EXISTING  
FLOWLINE

**Subject:** EXISTING  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** WATER EMERGENCIES 520-0300  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 1.17%%  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** (6334)  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

SHEET 3 OF 9


**Subject:** SHEET 3 OF 9  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** 6332  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:** VTC  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:** EX CURB FL=29.48 LIP=29.61  
**Page Label:** [1] SHT 1 GRADING  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text

3/ ✓  
--(6330)--


**Subject:**  
**Page Label:** [1] SHT 1 GRADING (6330)  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX FH  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text




**Subject:**  
**Page Label:** [1] SHT 1 GRADING EX CURB FL=30.51 LIP=30.63  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING CONSTRUCT A 6" CONCRETE CURB AROUND PAVERS EDGE  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING EL PASO COUNTY FILE NO. PPR 17-056  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text



**Subject:**  
**Page Label:** [1] SHT 1 GRADING GRADING & EROSION CONTROL PLAN DETAILS MASTER BLASTER JOB NO. 44-029  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text  
DATE PREPARED: OCTOBER 30, 2017 DATE REVISED: JANUARY 29, 2018

SHEET 4 OF 9

**Subject:**  
**Page Label:** [1] SHT 1 GRADING SHEET 4 OF 9  
**Lock:** Unlocked  
**Author:** AutoCAD SHX Text