



FINAL DRAINAGE REPORT

BENT GRASS RESIDENTIAL SUBDIVISION
FILING NO. 2
(SF-19-014)

El Paso County, Colorado

PREPARED FOR:
Challenger Homes
8605 Explorer Dr., Suite 250
Colorado Springs, CO 80920


PREPARED BY:
Galloway & Company, Inc.
1155 Kelly Johnson Blvd., Suite 305
Colorado Springs, CO 80920

DATE:
July 2019
Revised October 2019



ENGINEER'S STATEMENT

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the Drainage Criteria Manual for the City of Colorado Springs and El Paso County. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.

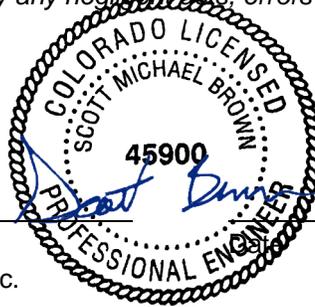

Scott Brown, PE 45900
For and on behalf of Galloway & Company, Inc.

10/21/2019

DEVELOPER'S CERTIFICATION

I, The developer, have read and will comply with all of the requirements specified in this drainage report and plan.

By: _____

_____ Date

Address: Challenger Homes
8605 Explorer Dr., Suite 250
Colorado Springs, CO 80920

DEVELOPER'S CERTIFICATION

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 and 2, El Paso County Engineering Criteria Manual and Land Development Code as amended.

Jennifer Irvine, P.E.
County Engineer/ECM Administrator

_____ Date

Conditions:

TABLE OF CONTENTS

| | | |
|-------|--|----|
| I. | Purpose | 1 |
| II. | General Description | 1 |
| III. | Previous Reports | 1 |
| IV. | Drainage Criteria..... | 2 |
| V. | Existing Drainage Conditions | 3 |
| VI. | Four Step Process | 5 |
| | 1. Employ Runoff Reduction Practices | 5 |
| | 2. Implement BMPs That Provide a Water Quality Capture Volume with Slow Release | 5 |
| | 3. Stabilize Drainageways..... | 5 |
| | 4. Implement Site Specific and Other Source Control BMPs..... | 5 |
| VII. | Proposed Drainage Conditions..... | 5 |
| VIII. | Proposed Water Quality Detention Ponds..... | 10 |
| IX. | Proposed Channel Improvements | 11 |
| X. | Proposed Regional Pond Improvements | 12 |
| XI. | Maintenance | 13 |
| XII. | Wetlands Mitigation..... | 13 |
| XIII. | Floodplain Statement | 13 |
| XIV. | Drainage/Bridge Fees and Credits/Reimbursements | 13 |
| XV. | Conclusion | 15 |
| XVI. | References | 16 |

Appendices:

- A. Exhibits and Figures
- B. Hydrologic Computations
- C. Hydraulic Computations
- D. Channel HEC-RAS Models
- E. On-Site Pond Calculations
- F. Regional Pond Calculations
- G. Drainage Map

I. Purpose

The intent of the developer is to develop the residential portion of the Bent Grass Subdivision. The purpose of this Final Drainage Report is to identify on and offsite drainage patterns, locate and identify tributary or downstream drainage features and facilities that impact the site, and to identify which types of drainage facilities will be needed and where they will be located. This report will remain in general compliance with the previously approved MDDP for the site prepared by Galloway & Company.

II. General Description

The project is a single-family residential development located in the Falcon area of El Paso County, Colorado. The site is located in the Northwest $\frac{1}{4}$ and Southwest $\frac{1}{4}$ of Section 1, Township 13S, Range 65W, of the Sixth Principal Meridian, County of El Paso, State of Colorado. The subject property is located to the south of The Meadows Filing No. 3; west of Bent Grass Residential Filing No. 1; north of Latigo Business Center Filing No 1, undeveloped property, and the Mountain View Electric Association; and east of The Meadows Filing No. 2. A Vicinity Map is included in Appendix A.

A Planned Unit Development Plan Amendment has already been approved for the site, PUD-14-002. This Development Plan is the basis for the drainage facility design contained within this MDDP. The site consists of approximately 103.4 acres and includes 309 dwelling units.

The existing soil types within the proposed site as determined by the NRCS Web Soil Survey for El Paso County Area consist of Columbine gravelly sandy loam, Blakeland-Fluvaquentic Haplaquolls, and Blakeland loamy sand. All soils are defined as having a hydrologic soil group of A. See the soils map included in Appendix A.

III. Previous Reports

The proposed site has been included in multiple drainage studies in the past. The following is a composite list of the existing reports pertaining to this site analysis.

1. *Falcon Drainage Basin Planning Study*, by Matrix Design Group, September 2015.
2. *Master Development Drainage Plan – Bent Grass Residential Subdivision*, by Galloway & Company, May 2019.
3. *Master Development Drainage Plan and Preliminary Drainage Plan – Bent Grass Subdivision*, by Kiowa Engineering Corporation, December 2006.
4. *Final Drainage Report for Bent Grass Residential (Filing No. 1)*, by Classic Consulting Engineers & Surveyors, LLC, August 2014.
5. *Final Drainage Report Addendum for Bent Grass Residential (Filing No. 1)*, by Classic Consulting Engineers & Surveyors, LLC, August 2015.
6. *Master Development Drainage Plan for The Ranch*, by Classic Consulting Engineers & Surveyors, LLC, November 2018.
7. *Falcon Highlands Master Development Drainage Plan & Preliminary Drainage Report & Final Drainage Report for Filing 1*, by URS, January 2005.
8. *Final Drainage Report and Erosion Control Plan – Latigo Business Center Filing No. 1 A Re-subdivision of a Portion of Latigo Business and Research Center Filing No. 1*, by Kiowa Engineering Corporation, November 2004.

9. *Final Drainage Letter Report for Lot 1, Latigo Business Center Filing No. 1*, by Colorado Design Concepts, April 2005.
10. *Final Drainage and Erosion Control for The Meadows Filing Three Subdivision*, by LADD Engineering, July 2000.

IV. Drainage Criteria

Hydrology calculations were performed using the City of Colorado Springs/El Paso County Drainage Criteria Manual, as revised in November 1991 and October 1994 with County adopted Chapter 6 and Section 3.2.1 of Chapter 13 of the City of Colorado Springs/El Paso County Drainage Criteria Manual as revised in May 2014.

The drainage calculations were based on the criteria manual Figure 6-5 and IDF equations to determine the intensity, and are listed in Table 1 below.

Table 1 - Precipitation Data

| Return Period | One Hour Depth (in). | Intensity (in/hr) |
|---------------|----------------------|-------------------|
| 5-year | 1.50 | 5.17 |
| 100-year | 2.52 | 8.68 |

The rational method was used to calculate peak flows as the tributary areas are less than 100 acres. The rational method has been proven to be accurate for basins of this size and is based on the following formula:

$$Q = CIA$$

Where:

- Q = Peak Discharge (cfs)
- C = Runoff Coefficient
- I = Runoff intensity (inches/hour)
- A = Drainage area (acres)

The runoff coefficients are calculated based on land use, percent imperviousness, and design storm for each basin, as shown in the drainage criteria manual (Table 6-6). Composite percent impervious and C values were calculated using the residential, streets, roofs, and lawns coefficients found in Table 6-6 of the manual.

The 100-year event was used as the major storm event for pipes and inlets. The 5-year event was used as the minor event.

For the preliminary design of the channels HEC-RAS version 5.0.3 was utilized. The model was prepared to evaluate velocity, Froude number, and channel depth. Additionally, the model was utilized to size the culverts under Bent Grass Meadows Parkway. A Manning's n value of 0.045 was utilized for the channel which is appropriate for a bunch type native grass that is anticipated within the full channel section. The channels were designed to have a maximum depth of 5' per the criteria manual and have a maximum velocity of 5 ft/s with a maximum Froude number of 0.6.

The UD-Detention spreadsheet was utilized for sizing the water quality orifices on the proposed water quality portion of the regional detention pond. This spreadsheet was also utilized for the design of the proposed on-site water quality ponds, Pond (North) and Pond (South).

HEC-HMS will be utilized to analyze the hydrology of the overall basin and verify that no changes in release rates have occurred to the regional detention pond with its addition of water quality.

UD-Inlet was utilized to calculate both the street capacities and the inlet capacities.

StormCAD was utilized to size the storm sewer systems.

V. Existing Drainage Conditions

The site is contained fully within one major drainage basin; the West Falcon Tributary. The site does border the Middle Falcon Tributary along the eastern edge of the property. The site generally drains from north to south with an average slope of 2% outside of the channel. The rational method was used to analyze the individual basins within the site because their size permits it. Excerpts from the DBPS are included in Appendix A.

In addition to the DBPS, The Ranch MDDP to the north and west of the site has revisited their existing conditions as well as existing conditions from the site directly to the north of them. Several detention ponds have been created within the Paint Brush Hills Subdivision which revise the offsite flow entering the site within the major drainageway. This is taken into account with The Ranch MDDP. While The Ranch is still in design stage they are proposing detention ponds within their site to release at historic rates. This will revise the flow rates in their designed section of the channel to below the rates that are identified within the DBPS. A HEC-HMS model will be prepared with subsequent submittals updating the existing flow rates within the channel (as well as the proposed flow rates).

Per the DBPS the site lies within the basins, WT200, WT210, and WT220. These basins connect to channel reaches RWT202, RWT204, and RWT210. Both the RWT204 and RWT210 sections of channel currently exist and appear as a drainageway when visiting the site. Reach RWT202 appears to be a shallow overland flow through the project site. It is nearly unrecognizable through the site from a visual standpoint.

The existing channels have been visually inspected via a site walk and all appear in really good condition. There are no signs of scour within the bottoms of the channel. There are small areas that are incised or sloughing at the top of bank of the channel. These areas are less than 12" in height.

There is a small depression at the north end of the site, it appears to be the remnants of an old stock pond. It provides no detention or water quality for the upstream area. It will be removed with the development of this site.

There is an existing sediment pond located to the east of the site, on what is known as the "School Site." This sediment pond was designed with the FDR Addendum for Bent Grass Residential Filing 1 and works for existing conditions. A permanent pond will need to be provided upon development of this site. Drainage basins OS-5 and OS-6 in the provided Proposed Drainage Maps (Appendix G) represent these areas.

A historic basin map has been prepared for this site to analyze the existing basins as well as the offsite basins contributing to the site. The historic map is included in Appendix G and basins are described below.

Basin A-1 (5.42 AC, $Q_5 = 2.2$ cfs, $Q_{100} = 12.4$ cfs): is associated with the northeastern portion of the proposed site. The basin is currently undeveloped. Runoff from the basin generally flows to the southeast, into the property to the east.

Basin A-2 (18.00 AC, $Q_5 = 5.3$ cfs, $Q_{100} = 35.4$ cfs): is associated with the northeastern portion of the proposed site. The basin is currently undeveloped. Runoff from the basin generally flows to the southwest into the existing channel RWT204.

Basin A-3 (19.59 AC, $Q_5 = 6.0$ cfs, $Q_{100} = 40.7$ cfs): is associated with the northwestern portion of the proposed site. The basin is currently undeveloped. Runoff from the basin generally flows to the southeast into the existing channel RWT204.

Basin A-4 (23.81 AC, $Q_5 = 8.3$ cfs, $Q_{100} = 46.5$ cfs): is associated with the western portion of the proposed site. The basin is currently undeveloped. Runoff from the basin generally flows to the south toward the Latigo Business Center Filing No. 1.

Basin B-1 (35.53 AC, $Q_5 = 9.6$ cfs, $Q_{100} = 64.2$ cfs): is associated with the southeastern portion of the proposed site. The basin is currently undeveloped. Runoff from the basin generally flows to the south offsite.

Basin B-2 (4.51 AC, $Q_5 = 1.5$ cfs, $Q_{100} = 10.0$ cfs): is associated with a portion of the middle of the site. The basin is currently undeveloped. Runoff from the basin generally flows to the southeast into the existing channel.

Basin B-3 (16.18 AC, $Q_5 = 7.8$ cfs, $Q_{100} = 36.9$ cfs): is associated with the southwestern portion of the proposed site. The basin is currently undeveloped. Runoff from the basin generally flows to the southeast into the existing channel.

Basin OS-1 (13.05 AC, $Q_5 = 6.9$ cfs, $Q_{100} = 28.6$ cfs) is associated with The Meadows Filing No. 3 lots 14, 15, 16, and 17. Runoff from this basin sheet flows to the northern property line of the site and then into Basin A-1 to Design Point (DP1).

Basin OS-2 (17.81 AC, $Q_5 = 11.4$ cfs, $Q_{100} = 41.7$ cfs) is associated with The Meadows Filing No. 3 lots 7, 10, 11, 12 and 13. Runoff from this basin sheet flows to the northern property line and into Basin A-2 to DP 2 where it enters RWT204.

Basin OS-3 (9.99 AC, $Q_5 = 5.4$ cfs, $Q_{100} = 23.4$ cfs) is associated with The Meadows Filing No. 3 lots 4 and 5. Runoff from this basin sheet flows to the northern property line and into Basin A-3 to DP 3 where it enters RWT204.

Basin OS-4 (30.69 AC, $Q_5 = 12.0$ cfs, $Q_{100} = 55.4$ cfs) is associated with The Meadows Filing No. 1 lots 4, 5, 6, 7, 8, 9, 10 and 11. Runoff from this basin sheet flows east to the western property line of the site and into Basin A-4 where it then flows south to DP 4.

Basin OS-5 (14.13 AC, $Q_5 = 4.9$ cfs, $Q_{100} = 27.5$ cfs): a basin that is associated with Bent Grass Filing No. 1. Runoff from this basin sheet flows from the North to the South into basin OS-6 and an existing sediment pond.

Basin OS-6 (5.81 AC, Q5 = 1.9 cfs, Q100 = 12.8 cfs): a basin that is associated with Bent Grass Filing No. 1. Runoff from this basin sheet flows from the North to South to an existing sediment pond and then into Bent Grass Meadows Drive.

VI. Four Step Process

The Four Step Process is used to minimize the adverse impacts of urbanization and is a vital component of developing a balanced, sustainable project. Below identifies the approach to the four-step process:

1. Employ Runoff Reduction Practices

The proposed development uses Low Impact Development (LID) practices to reduce runoff at the source. Rather than creating point discharges that are directly connected to impervious areas, runoff is routed through pervious areas to promote infiltration. Grass buffers and swales are used where practical.

2. Implement BMPs That Provide a Water Quality Capture Volume with Slow Release

This step utilizes formalized water quality capture volume to slow the release of runoff from the site. Pond WU will be modified to provide EURV and WQCV for its entire tributary area. The EURV volume will release in 72 hours, while the WQCV will release in no less than 40 hours. On-site water quality control volume detention ponds will provide water quality treatment prior to the runoff being released into the channel.

3. Stabilize Drainageways

This step implements stabilization to channels to accommodate developed flows while protecting infrastructure and controlling sediment loading from erosion in the drainageways. Erosion protection in the form of riprap pads at all outfall points to the channel to prevent scouring of the channel from point discharges. A HEC-RAS model has been created and used to evaluate the stability of the existing and proposed channels. It has been determined that given that the channel is stable in its current state and the proposed velocities and Froude numbers are similar to those in the existing channel, no improvements will be made to the channel at this time. This will be further discussed later in this report.

4. Implement Site Specific and Other Source Control BMPs

Source control BMPs for homeowners include the use of garages as the primary area where pollutants can be stored. The single-family detached homes provide garages which can act as storage areas. The proposed development does not include outdoor storage or the potential for introduction of contaminants to the city's MS4, thus no targeted source control BMPs are necessary. The biggest source control BMP is public education which can be found on the City of Colorado Springs website and discuss topics such as: pet waste, car washing, lawn care, fall leaves, and snow melt and deicer.

VII. Proposed Drainage Conditions

There has been very minor change to the overall Falcon Area Basin delineation with the proposed condition. A small portion of the site that previously went to the Middle Tributary has been revised to come into the site and a small portion of the site that was previously within the West Tributary has been

designed to drain into the Middle Tributary. This will be discussed with the individual basins. All necessary calculations can be found within the appendices of the report.

According to the DBPS, there are two channels that run through the site. As was discussed within the Existing Conditions portion of the report both the RWT202 and RWT204 run through the site. The RWT202 channel will be rerouted on the north end, prior to entering the site, to flow in the existing RWT204 channel. The proposed development will drain to the RWT204 channel, which becomes RWT210 further south in the site. Because Bent Grass Meadows Parkway is being constructed, (2) 16' x 6' concrete box culverts for RWT204 will be installed with this project. This will be installed in its ultimate location.

The DBPS alternative that was approved shows a small sub regional pond (SR3) to provide EURV for a portion of the tributary area. The basin analysis provided in the DBPS shows no decrease in either the 2-year or the 100-year events through this point. It has been discussed with El Paso County to provide detention ponds that only treat the Water Quality Capture Volume (WQCV) but in lieu of that revise the existing detention pond WU South to provide water quality for the entire tributary area. This modification will be discussed later in the report.

The site will provide WQCV Detention Ponds to provide water quality treatment prior to discharging the runoff directly into the West Tributary channel RWT204.

As has been mentioned previously the site is proposed to be single family residential. The site has been designed to provide a large lot buffer between the existing large lots to the north and west of the site and the proposed site. Beyond this buffer the majority of the site is smaller approximately 1/8 acre lots.

Basin OS-1 (32.28 AC, Q5 = 15.1 cfs, Q100 = 65.1 cfs): a basin that is associated with The Meadows Filing No. 3 lots 7, 10, 11, 12, 13, 14, 15, 16, and 17. Runoff from this basin sheet flows south to the northern property line of the site to Proposed Swale - A that will convey flows directly to the existing RWT204.

Basin A-1 (2.70 AC, Q5 = 3.3 cfs, Q100 = 8.6 cfs): a basin that is in the northeast corner of the site. It encompasses single-family residential lots (Type A and B) along Ansley Court. Runoff will flow from each lot onto Ansley Court where proposed mountable curb and gutter will convey flows to **DP-1**. Flows will then be conveyed West by mountable curb and gutter to DP-2.

Basin A-2 (1.19 AC, Q5 = 1.5 cfs, Q100 = 4.1 cfs): a basin that is in the northeast area of the site. It encompasses single-family residential lots (Type A) along Berwyn Court. Runoff will flow from each lot onto Berwyn Court where proposed mountable curb and gutter will convey flows to **DP- 2**. Flows will then be conveyed South by mountable curb and gutter to DP-3.

Basin A-3 (1.57 AC, Q5 = 2.0 cfs, Q100 = 5.0 cfs): a basin that is in the northeast area of the site. It encompasses single-family residential lots (Type A and B) along Niebrara Drive and Berwyn Court. Runoff will flow from each lot onto Niebrara Drive and Berwyn Court where proposed mountable curb and gutter will convey flows to **DP-3**. Flows will then be conveyed West by a proposed cross pan to DP-4.

Basin A-4 (2.24 AC, Q5 = 2.9 cfs, Q100 = 7.5 cfs): a basin that is in the northeast area of the site. It encompasses single-family residential lots (Type A and B) along Berwyn Court and a small portion of Willmore Drive. Runoff will flow from each lot onto Berwyn Court where proposed mountable curb and

gutter will convey flows to **DP-4**. Flows will then be conveyed West along Bent Grass Meadows Drive by curb and gutter to DP-8.

Basin E-1 (1.71 AC, Q5 = 3.6 cfs, Q100 = 7.6 cfs): a basin that is in the center of the site and encompasses a portion of Bent Grass Meadows Drive. A high point on the far East of the basin forces water to flow to a low point at **DP-8**, which represents a 20' CDOT Type R sump inlet, which conveys stormwater via proposed 36" RCP storm sewer to the north water quality detention pond. Emergency overflow will spill over the crown of the road and enter into a proposed 10' CDOT Type R sump inlet represented by DP-7.

Basin D-2 (3.19 AC, Q5 = 3.9 cfs, Q100 = 5.7 cfs): a basin that is in the northwest area of the site. It is undeveloped and covered in native grasses, weeds, rock, and shrubs. Runoff from this basin sheet flows from North to South along grades between 2.5 and 6.5 percent. Small portions of the basin will flow directly into RWT202. Most of this basin sheet flows from north to south and collects at **DP-5**. Flows will then be conveyed East by a proposed cross pan to DP-6.

Basin D-1 (12.49 AC, Q5 = 13.7 cfs, Q100 = 36.6 cfs): a basin that is in the northwest area of the site. It is undeveloped and covered in native grasses, weeds, rock, and shrubs. Runoff from this basin sheet flows from North to South along grades between 2.5 and 6.5 percent. Small portions of the basin will flow directly into RWT204. Most of this basin sheet flows from north to south and collects at **DP-6**. Flows will then be conveyed East along Bent Grass Meadows Drive by curb and gutter to DP-8.

Basin E-2 (0.68 AC, Q5 = 2.4 cfs, Q100 = 4.6 cfs): a basin that is in the center of the site and encompasses a portion of Bent Grass Meadows Drive. A high point on the far West of the basin forces water to flow to a low point at **DP-8**, which represents a 20' CDOT Type R sump inlet, which conveys stormwater via a proposed 36" RCP storm sewer to the north water quality detention pond. Emergency overflow will spill over the crown of the road and enter into a proposed 10' CDOT Type R sump inlet represented by DP-7.

Basin E-3 (0.78 AC, Q5 = 2.9 cfs, Q100 = 5.3 cfs): a basin that is in the center of the site and encompasses a portion of Bent Grass Meadows Drive. A high point on the far West of the basin forces water to flow to a low point at **DP-7**, which represents a 10' CDOT Type R sump inlet, which conveys stormwater via a proposed 24" storm sewer to **DP-8**. This inlet receives emergency overflow from DP-8.

Basin B-3 (0.46 AC, Q5 = 1.1 cfs, Q100 = 2.3 cfs): a basin that is in the North-central area of the site. It encompasses the fronts of two single family Type A lots, and a large portion of Silky Thread Road. Runoff will flow from each lot onto Silky Thread Road where proposed mountable curb and gutter will convey flows west into temporary Proposed Swale - B. Flows will continue West and then South to **DP-14** where it will enter the north water quality detention pond.

Basin B-4 (1.19 AC, Q5 = 0.4 cfs, Q100 = 2.5 cfs): a basin that is in the North-central area of the site, and a portion of The Meadows Filing No. 3 lot 13. Runoff from this basin sheet flows until it is intercepted by temporary Proposed Swale - B just West of Silky Thread Road. Once intercepted, flows will be routed West and then South to **DP-14** into the north water quality detention pond.

Basin B-1 (4.46 AC, Q5 = 6.6 cfs, Q100 = 14.0 cfs): a basin that is in the northeast area of the site. It encompasses single-family residential Type A lots along Thedford Court and Willmore Drive. Runoff will flow from each lot onto the street where proposed mountable curb and gutter will convey flows South and then West to **DP-11**.

Basin B-2 (1.17 AC, Q5 = 2.0 cfs, Q100 = 4.3 cfs): a basin that is in the northeast area of the site. It encompasses the fronts of single-family residential Type B lots along Willmore Drive. Runoff will flow from each lot onto the street where proposed mountable curb and gutter will convey flows West to **DP-12**.

Basin B-5 (1.56 AC, Q5 = 0.5 cfs, Q100 = 3.7 cfs): a basin that is in the northeast area of the site. It is undeveloped and covered in native grasses, weeds, rock, and shrubs. Runoff from this basin sheet flows from North to South along grades around 2 percent. Runoff will be intercepted by temporary Proposed Swale B and C that will convey flows to **DP-14** into the north water quality detention pond.

Basin B-6 (0.62 AC, Q5 = 0.2 cfs, Q100 = 1.5 cfs): a basin that is in the northeast area of the site adjacent to RWT204. It encompasses the proposed north water quality detention pond. Runoff will sheet flow directly into the pond. The pond will outfall to RWT204.

Basin C-5 (7.86 AC, Q5 = 10.9 cfs, Q100 = 24.9 cfs): a basin that is in the southeast area of the site. It encompasses single-family residential lots, Type A lots along Feather Reed Drive and Avena Road. Runoff will flow from each lot onto the street where proposed mountable curb and gutter will convey flows West and then South to a proposed on-grade 15' CDOT Type R inlet, **DP-16**. Captured flow will convey stormwater via a proposed 24" RCP storm sewer to DP-17. By-pass flow will continue down Feather Reed Drive to DP-18 where 5 yr. and 100 yr. flows will be completely captured by a 20' CDOT Type R sump inlet.

Basin C-6 (5.54 AC, Q5 = 6.9 cfs, Q100 = 16.9 cfs): a basin that is in the southeast area of the site. It encompasses single-family residential lots, Type A lots along the North portion of Feather Reed Drive and Type A lots along the South portion of Feather Reed Drive. Runoff will flow from each lot onto Feather Reed Drive where proposed mountable curb and gutter will convey flows West and then South to a proposed on-grade 10' CDOT Type R inlet, **DP-17**. Captured flow will convey stormwater via a proposed 30" RCP storm sewer to DP-19A. By-pass flow will continue down Feather Reed Drive to DP-19 where 5 yr. and 100 yr. flows will be completely captured by a 20' CDOT Type R sump inlet.

Basin C-3 (2.38 AC, Q5 = 3.4 cfs, Q100 = 7.9 cfs): a basin that is in the southeast area of the site. It encompasses single-family residential lots, Type A lots along Berwyn Drive. Runoff will flow from each lot onto the street where proposed mountable curb and gutter will convey flows West to a proposed 20' CDOT Type R sump inlet, **DP-18**. 5 yr. and 100 yr. flows will be completely captured and then conveyed via a proposed 30" RCP storm sewer to DP-19.

Basin C-4 (3.61 AC, Q5 = 5.2 cfs, Q100 = 12.0 cfs): a basin that is in the southeast area of the site. It encompasses single-family residential lots, Type A lots along Bossett Drive. Runoff will flow from each lot onto the street where proposed mountable curb and gutter will convey flows West to a proposed 20' CDOT Type R sump inlet, **DP-18**. 5 yr. and 100 yr. flows will be completely captured and then conveyed via a proposed 30" RCP storm sewer to DP-19.

Basin C-1 (1.35 AC, Q5 = 2.6 cfs, Q100 = 5.8 cfs): a basin that is associated with Bent Grass Residential Filing No. 1 lots 58, 59, 60, 61, 62, 63, 64, 65, and 66. It encompasses the rears of single-family residential lots. Runoff will flow West from each lot into a proposed swale which will convey flows South to Avena Road. Then, proposed mountable curb and gutter will convey flows West and will be routed through basin C-2 along Berwyn Drive to **DP-19**.

Basin C-2 (7.81 AC, Q5 = 8.1 cfs, Q100 = 20.9 cfs): a basin that is in the Southeast corner of the site. It encompasses fronts of single-family residential Type B lots. Runoff will flow from each lot onto Berwyn Drive where proposed mountable curb and gutter will convey flows South and then West to a proposed 20' CDOT Type R sump inlet, **DP-19**, where 5 yr. and 100 yr. flows will be completely captured and then conveyed via a proposed 42" RCP storm sewer pipe to outfall the south water quality detention pond.

Basin C-7 (0.76 AC, Q5 = 0.3 cfs, Q100 = 1.8 cfs): a basin that is in the South-central area of the site adjacent to RWT204 and RWT 210. It encompasses the proposed south water quality detention pond. Runoff will sheet flow directly into the pond. The pond will outfall to RWT210.

Basin C-8 (0.92 AC, Q5 = 0.3 cfs, Q100 = 2.2 cfs): a basin that is in the South-central area of the site adjacent to RWT204 and RWT 210. It encompasses the rears of single-family residential Type B lots. Runoff will sheet flow West directly into RWT204 and RWT210.

Basin OS-2 (20.08 AC, Q5 = 9.1 cfs, Q100 = 43.5 cfs): a basin that is associated with The Meadows Filing No. 2 lots 1, 2, 3, 4, 5, and 6. Runoff from this basin sheet flows from the Northwest to the Southeast until crossing the West property line of the site. The runoff will continue to sheet flow in the same manner through basins D-4 and D-3 until intercepted by Proposed Swale - D on the southern property line of the site. Collected flows will then be routed East to **DP-23** where 5 yr. and 100 yr. flows will be captured by a CDOT Type D area inlet. Flows will then be conveyed by a 36" RCP storm drain piped underneath Bent Grass Meadows Drive out falling into Proposed Swale - E that will route flows South to DP-26 and then East by Proposed Swale – F ultimately outfalling into RWT210.

Basin OS-3 (10.62 AC, Q5 = 4.7 cfs, Q100 = 22.6 cfs): a basin that is associated with The Meadows Filing No. 1 lot 11 and The Meadows Filing No. 2 lots 1 and 2. Runoff from this basin sheet flows from the Northwest to the Southeast until crossing the West property line of the site. The runoff will continue to sheet flow in the same manner through basin D-4 until intercepted by Proposed Swale - D on the southern property line of the site. Collected flows will then be routed East to **DP-23** where 5 yr. and 100 yr. flows will be captured by a CDOT Type D area inlet. Flows will then be conveyed by a 36" RCP storm drain piped underneath Bent Grass Meadows Drive out-falling into Proposed Swale – E that will route flows South to DP-26 and then ultimately East by Proposed Swale – F into RWT210.

Basin D-4 (9.53 AC, Q5 = 7.1 cfs, Q100 = 23.2 cfs): a basin that is in the West area of the site. Runoff from this basin sheet flows from the Northwest to the Southeast. The runoff be intercepted by Proposed Swale – D on the southern property line of the site. Collected flows will then be routed East to **DP-23** where 5 yr. and 100 yr. flows will be captured by a CDOT Type D area inlet. Flows will then be conveyed by a 36" RCP storm drain piped underneath Bent Grass Meadows Drive out-falling into Proposed Swale – E that will route flows South to DP-26 and then ultimately East by Proposed Swale – F into RWT210.

Basin D-3 (9.16 AC, Q5 = 9.4 cfs, Q100 = 26.2 cfs): a basin that is in the West area of the site. Runoff from this basin sheet flows from the Northwest to the Southeast. A large portion of the runoff will be intercepted by Proposed Swale – D on the southern property line of the site. Collected flows in the swale will then be routed East to **DP-23** where 5 yr. and 100 yr. flows will be captured by a CDOT Type D area inlet. Flows will then be conveyed by a 36" RCP storm drain piped underneath Bent Grass Meadows Drive out-falling into Proposed Swale – E that will route flows South to DP-26 and then East by Proposed Swale – F into RWT210. The rest of flow from the basin sheet flow onto Bent Grass Meadows Drive where proposed curb and gutter will convey flows South where the 5 yr. and 100 yr. flows will be captured by a proposed 25' CDOT Type R on-grade inlet, **DP-24**. Captured flow will be routed by a 24" RCP storm drain piped to DP-25.

Basin E-4 (0.91 AC, Q5 = 3.0 cfs, Q100 = 5.7 cfs): a basin that is in the Southwest area of the site and encompasses a portion of Bent Grass Meadows Drive. Runoff from this basin is almost immediately captured by proposed curb and gutter and then routed South where the 5 yr. and 100 yr. flows will be captured by a proposed 25' CDOT Type R on-grade inlet, **DP-24**. Captured flow will be routed by a 24" RCP storm drain piped to DP-25.

Basin E-5 (0.89 AC, Q5 = 3.3 cfs, Q100 = 6.1 cfs): a basin that is in the Southwest area of the site and encompasses a portion of Bent Grass Meadows Drive. Runoff from this basin is almost immediately captured by proposed curb and gutter and then routed South where the 5 yr. and 100 yr. flows will be captured by a proposed 25' CDOT Type R on-grade inlet, **DP-25**. Captured flow will be routed by a 24" RCP storm drain piped to an outfall at DP-26. Flows will then be routed East by Proposed Swale – F until out-falling into RWT210.

Basin F-1 (0.44 AC, Q5 = 0.6 cfs, Q100 = 1.7 cfs): a basin that is in the Northeast corner of the site. It encompasses the rears of single-family residential Type B lots. Runoff from the basin will follow historical patterns East onto a future school site.

Basin F-2 (0.55 AC, Q5 = 1.8 cfs, Q100 = 3.7 cfs): a basin that is in the east side of the site. It encompasses a portion of Bent Grass Meadows Parkway. There is a high point in the road causing a portion of the road to drain east into the existing roadway. Bent Grass Residential Filing No. 1 had two basins accounting for this condition (Basins A and B with a total area of 0.38 acres). The anticipated flow rate from these two basins was 1.3 cfs in the 5-year event and 2.6 cfs in the 100-year event. The proposed runoff from the proposed slightly exceeds the anticipated runoff in the Filing No. 1 Report.

Basin G-1 (0.98 AC, Q5 = 0.3 cfs, Q100 = 2.3 cfs): a basin that is in the South-east corner of the site. It encompasses the rears of single-family residential Type B lots. Runoff will follow historical patterns and sheet flow South off-site.

Basin H-1 (0.31 AC, Q5 = 1.1 cfs, Q100 = 2.1 cfs): a basin that is associated with Latigo Business Center Filing No. 1 lot 1. It encompasses a portion of Bent Grass Meadows Parkway South of the proposed (2) 25' CDOT Type R Inlets on site.

Basin OS-5 (14.13 AC, Q5 = 4.9 cfs, Q100 = 27.5 cfs): a basin that is associated with Bent Grass Filing No. 1. Runoff from this basin sheet flows from the North to the South into basin OS-6 and an existing sediment pond.

Basin OS-6 (5.38 AC, Q5 = 8.8 cfs, Q100 = 19.3 cfs): a basin that is associated with Bent Grass Filing No. 1. Runoff from this basin sheet flows from the North to South to an existing sediment pond. This sediment pond works in existing conditions. A permanent pond will need to be provided upon development of this site.

VIII. Proposed Water Quality Detention Ponds

Two Water Quality Capture Volume Detention Ponds will be provided for the proposed site. One will be provided for the area north of Bent Grass Meadows Drive and the other will be provided for the area to the south. Both ponds are private. These detention ponds will only provide water quality. The EURV and 100-year volumes will be conveyed via the emergency overflow weir. The water quality volume release

will be controlled with an orifice plate that will release in 40 hours. The north water quality pond will release into RWT204 and the south will release into RWT210.

IX. Proposed Channel Improvements

As can be seen in the drainage maps the proposed Filing No. 2 does not encroach into the existing channel for the RWT204 reach. It is desired to leave the channel in its existing condition if the channel can be proven to be stable. In the future when the remainder of the site is developed the RWT204 channel will be consolidated into a smaller designed cross section and will be relocated to within a tract. It will be realigned off of its current alignment.

The future channel and the existing channel do not align at this location. Therefore, a small amount of grading is proposed to direct runoff from the existing channel to the proposed culvert location. After outfalling to the south of Bent Grass Meadows Parkway there is another small section of grading to direct flows back to the existing channel. The radii of these bends were designed such that super elevation/increased velocities are not expected.

The future channel design is anticipated to have a series of Grouted Sloping Boulder Drops within it.

Reviewing the HEC-RAS model prepared for the conditions proposed by this report will show that the existing and proposed conditions have similar velocities and Froude numbers. Given that the channel is stable in its current state it is proposed to not provide improvements to the channel at this time.

Riprap protection will be provided at the individual outfalls from the site into the channel to prevent scouring from the point discharges.

Future filings will need to review the channel for necessary improvements if the ultimate channel is not constructed at such time.

At this time the RWT202 reach will be rerouted on the north end of the site and directed into the existing RWT204 reach. This has been modeled in the HEC-RAS model to ensure that the channel will still be stable with this additional flow.

The MDDP identifies the use of check structures for the RWT210 channel downstream of the site. Again, due to the existing stability of the channel and the minor increase in flows velocities and Froude numbers have only slightly changed. For the purposes of this Filing it is proposed to leave the channel as is and install the proposed improvements with subsequent filings.

The channel design flow rates have previously been established using HEC-HMS in the DBPS. The site has been analyzed using the Rational method. The HEC-HMS model for the basin has been obtained from El Paso County and has been revised accordingly for the developed site. It was necessary to break apart the basin into a couple of smaller basins in order to accurately design the crossings of Bent Grass Meadows Parkway. The DBPS also shows the pond SR3 which has been removed with this project, so it was necessary to remove it from the model.

In addition to the changes made with this project several changes have been made upstream of the Bent Grass Subdivision. The Ranch MDDP has added detention ponds for their project and has corrected several of the other offline ponds near the northern end of their site. In addition to the ponds the DBPS had identified a flow diversion from the Falcon Watershed into the Sand Creek Watershed. This diversion

has been corrected with The Ranch MDDP. The updated HEC-HMS model is necessary because the DBPS hydrology has now been superseded by The Ranch design.

The Ranch MDDP has also investigated the connection from The Ranch site through the Meadows Filing No. 3 to the Bent Grass site. It has been identified that the existing homes within the Meadows do not have the adequate drainage improvements to convey storm water through the subdivision. The drainage path through the Meadows is incorrectly identified and allowed homes built closer to the flow path than should have been allowed. In addition, several culverts were erroneously constructed restricting the flow path through the subdivision.

The conclusion of The Ranch MDDP is that major channel improvements are necessary through the Meadows subdivision. They state that multiple meetings have taken place with El Paso County regarding this issue and funding for the improvements is being discussed.

X. Proposed Regional Pond Improvements

As has been previously mentioned the DBPS identified a pond named SR3 at the junction of RWT202 and RWT204 near the south end of the Bent Grass Residential Subdivision. The purpose of this pond was to provide EURV for a portion of the tributary area, it was identified to have a volume of 1 acre-foot. It has been discussed with El Paso County to not construct this pond. In its place will be two on-site WQCV detention ponds. In addition, Pond WU will be modified to provide water quality for the entire tributary area. It is not understood how the 1 ac-ft volume for pond SR3 was generated. The onsite water quality ponds proposed have a total 0.85 ac-ft volume. If pond SR3 was truly online and provided EURV for the entire tributary area the volume would far exceed the 1 ac-ft volume that was required. In general as the undeveloped areas develop and are now required to provide onsite water quality this will aid in detaining the lower event storms which will aid in the stability of the existing channel in small storm events.

Utilizing the areas and percent impervious values from the future models in the DBPS it was determined that pond WU has a tributary area of 3.58 square miles and a 7.33% impervious. Utilizing the WQCV equations contained with the Criteria it has been determined that a volume of 9.764 ac-ft is required for the entire tributary area. This volume exceeds the volume for the 5-year event per the DBPS.

The stage storage data for the pond was taken from the DBPS and it was found that the required volume exceeds the front edge of the existing outlet structure on the pond. It is proposed to raise the front edge of the existing outlet to provide the required water quality capture volume. The existing orifices on the face of the outlet structure will be covered to prevent release through them and a new rectangular hole will be cut through the existing wall. An orifice plate with square orifices will be installed to release the WQCV. A well screen will be installed on the face of the outlet structure. A small micro pool will be proposed directly in front of the orifice plate in an effort to reduce clogging of the well screen. The revised HEC-HMS model prepared for the channel flow rates will review the pond function and release rates when prepared.

In reviewing the pond and in discussions with El Paso County the inlet to Pond WU has washed out and is in need of repair. As part of the proposed improvements to the pond the washed out embankment will be repaired. Not much discussion or design can be located regarding the original embankment. In discussions with the County it is understood that there are multiple areas of wetlands in the area. While the majority of the West Tributary should be directed through Pond WU there are two 18" pipes to the east of the embankment that allow flows to pass from the West Tributary into the existing wetlands to

maintain them. The embankment is designed such that flows will back up prior to entering Pond WU and will pass through the existing pipes to the east.

Site investigations have identified that a large reason the embankment failed was improper erosion protection. It is apparent that as the embankment was overtopped it began scouring under the riprap placed on the downhill side of the embankment. Given enough time or a large enough storm it was able to dislodge a section of the protection and the embankment washed out.

It is proposed to fill the washed out area of the embankment back to match the existing grades around it. The 18" pipe through the embankment will be replaced. The purpose of this pipe is to drain the area just upstream of the embankment since the dual pipes to the east are higher than that point. Riprap will be re-established on the downstream side of the embankment. In addition it is proposed to riprap the top of the embankment to protect it from scour. A cutoff wall will also be installed through the full length of the embankment from the top of the embankment to just below the toe of slope on the downstream side. The cutoff wall should be installed on downstream side of the top of the embankment. It is proposed to install a portion of the cutoff wall as sheet pipes. This will be through the area of the embankment that is still existing to avoid reconstructing the entire embankment. In the area where the washout occurred and where the pipe will be passing through the cutoff wall it is proposed to do a concrete cutoff wall. The concrete wall should be cast around the sheet pipe wall on both ends to prevent flows cutting between the walls and creating a failure.

XI. Maintenance

The proposed channels are to be public facilities. After completion of construction and upon the Board of County Commissioners acceptance the channels will be owned and maintained by El Paso County along with all drainage facilities within the public Right-of-Way.

XII. Wetlands Mitigation

No wetlands are located on site.

XIII. Floodplain Statement

A portion of the project site lies within Zone AE Special Flood Hazard Area as defined by the FIRM Map number 08041C0553G effective December 7, 2018. A copy of the FIRM Panel is included in Appendix A.

The portion of channel that has a floodplain designation is only the RWT210 and RWT204 portions of the channel. It is unknown why the western channel, RWT202 is unmapped since it is the larger contributor regarding flow rates. Discussions have occurred with PPRBD and a no rise certificate will be required for the existing channel. Models have been obtained from FEMA which show that the FEMA discharges are higher than the DBPS. Therefore the culvert crossing at Bent Grass Meadows Parkway has been sized per the FEMA flows and not the DBPS. The no rise certification will be provided under a separate report.

XIV. Drainage/Bridge Fees and Credits/Reimbursements

The site lies within the Falcon Drainage Basin. The DBPS was approved in 2013 and has drainage and bridge fees associated with the basin.

The subdivision has a total area of 50.795 acres.

The percent impervious for the subdivision has been calculated with this report to be approximately 39 percent.

50.795 acres x 39% = 19.81 Impervious Acres

The following calculations are based on the 2019 Falcon Basin drainage/bridge fees:

Drainage Fees

\$29,622 x 19.81 Imp. Acres = \$586,811.82

Bridge Fees

\$4,069 x 19.81 Imp. Acres = \$80,606.89

Per discussions with El Paso County the fees may be offset by the cost of regional improvements. The regional improvements would include channel, detention pond modification, and pond inlet repair costs. Below is a table of the reimbursable costs limited to those shown in the Falcon DBPS.

| Item | Quantity | Unit | Unit Cost | Cost |
|---------------------------------------|----------|------|--------------|----------------------|
| Channel Improvements | | | | |
| 30" Grouted Boulders | 33 | SY | \$ 190.00 | \$ 6,270.00 |
| Soil Rip Rap - Type M | 20.8 | CY | \$ 70.00 | \$ 1,456.00 |
| 6' Cutoff Wall - Concrete | 35 | CY | \$ 600.00 | \$ 21,000.00 |
| Subtotal | | | | \$ 28,726.00 |
| Regional Pond Improvements (Public) | | | | |
| 18" RCP Storm Drain (Public) | 126 | LF | \$ 54.00 | \$ 6,804.00 |
| 18" FES | 2 | EA | \$ 920.00 | \$ 1,840.00 |
| 3' Concrete Headwall | 2 | CY | \$ 600.00 | \$ 1,200.00 |
| 13' Cutoff Wall - Concrete | 60 | CY | \$ 600.00 | \$ 36,000.00 |
| 13' Cutoff Wall - Steel Reinforcement | 6380 | LBS | \$ 0.90 | \$ 5,742.00 |
| 13' Sheet Pile Cutoff Wall | 155 | LF | \$ 620.00 | \$ 96,100.00 |
| Rip Rap - Type VH | 2260 | CY | \$ 85.00 | \$ 192,100.00 |
| Pond Modification to Full Spectrum | 1 | LS | \$ 60,000.00 | \$ 60,000.00 |
| Subtotal | | | | \$ 399,786.00 |
| Total (Public) | | | | \$ 428,512.00 |
| Contingency | | | 10% | \$ 42,851.20 |
| Grand Total (Public) | | | | \$ 471,363.20 |

Below is a cost estimate for the improvements proposed with this filing.

| Item | Quantity | Unit | Unit Cost | Cost |
|------|----------|------|-----------|------|
| | | | | |

| Storm Drain Improvements (Public) | | | | |
|---|-------|-----|--------------|----------------------|
| 10' CDOT Type R Inlet (Public) | 10 | EA | \$ 8,000.00 | \$ 80,000.00 |
| 15' CDOT Type R Inlet (Public) | 3 | EA | \$ 9,800.00 | \$ 29,400.00 |
| CDOT Type D Area Inlet (Public) | 1 | EA | \$ 7,900.00 | \$ 7,900.00 |
| 5' Manhole - Type II (Public) | 1 | EA | \$ 4,700.00 | \$ 4,700.00 |
| 24" RCP Storm Drain (Public) | 137 | LF | \$ 70.00 | \$ 9,590.00 |
| 30" RCP Storm Drain (Public) | 122 | LF | \$ 95.00 | \$ 11,590.00 |
| 36" RCP Storm Drain (Public) | 245 | LF | \$ 110.00 | \$ 26,950.00 |
| 42" RCP Storm Drain (Public) | 50 | LF | \$ 140.00 | \$ 7,000.00 |
| 24" FES | 1 | EA | \$ 970.00 | \$ 970.00 |
| 36" FES | 1 | EA | \$ 1,610.00 | \$ 1,610.00 |
| 18" FES | 2 | EA | \$ 1,700.00 | \$ 3,400.00 |
| Subtotal | | | | \$ 183,110.00 |
| Culvert (Concrete Box Culvert) (Public) | | | | |
| 6' x 12' Concrete Box Culvert | 266 | LF | \$ 1,600.00 | \$ 425,600.00 |
| 30" Grouted Boulders | 164 | SY | \$ 190.00 | \$ 31,160.00 |
| Soil Rip Rap - Type M | 52.44 | CY | \$ 70.00 | \$ 3,670.80 |
| Headwalls - Concrete | 35 | CY | \$ 600.00 | \$ 21,000.00 |
| Wingwalls - Concrete | 60 | CY | \$ 600.00 | \$ 36,000.00 |
| Headwalls - Steel Reinforcement | 1300 | LBS | \$ 0.90 | \$ 1,170.00 |
| Wingwalls - Steel Reinforcement | 4430 | LBS | \$ 0.90 | \$ 3,987.00 |
| Subtotal | | | | \$ 522,587.80 |
| WQCV Detention Ponds (Private) | | | | |
| Pond (North) | 1 | EA | \$ 80,000.00 | \$ 80,000.00 |
| Pond (South) | 1 | EA | \$ 80,000.00 | \$ 80,000.00 |
| Subtotal | | | | \$ 160,000.00 |
| Total | | | | \$ 865,697.80 |
| Contingency | | | 10% | \$ 86,569.78 |
| Grand Total | | | | \$ 952,267.58 |

XV. Conclusion

The Bent Grass Residential Subdivision lies within the West Tributary of the Falcon Area Watershed. Recommendations are made within this report to establish and stabilize multiple drainageways through the project site. Detention for the site is provided in two on-site WQCV ponds and a regional pond that will be modified to provide water quality for the entire tributary area. Recommendations are also given for re-establishing the inlet to the regional pond. All drainage facilities within this report were sized according to the Drainage Criteria Manuals. All of the channel corridors will be publicly owned and maintained and shall be the responsibility of El Paso County. Upon development of the individual parcels within the Bent Grass Residential Subdivision, separate Final Drainage Reports will be required to be submitted and approved by El Paso County.

XVI. References

1. *City of Colorado Springs/County of El Paso Drainage Criteria Manual*, October 1991.
2. *Drainage Criteria Manual, Volume 2*, City of Colorado Springs, November 2002.
3. *Urban Storm Drainage Criteria Manual*, Urban Drainage and Flood Control District, January 2016 (with current revisions).
4. *Falcon Drainage Basin Planning Study*, by Matrix Design Group, September 2015.
5. *Master Development Drainage Plan and Preliminary Drainage Plan – Bent Grass Subdivision*, by Kiowa Engineering Corporation, December 2006.
6. *Final Drainage Report for Bent Grass Residential (Filing No. 1)*, by Classic Consulting Engineers & Surveyors, LLC, August 2014.
7. *Final Drainage Report Addendum for Bent Grass Residential (Filing No. 1)*, by Classic Consulting Engineers & Surveyors, LLC, August 2015.
8. *Master Development Drainage Plan for The Ranch*, by Classic Consulting Engineers & Surveyors, LLC, November 2018.
9. *Falcon Highlands Master Development Drainage Plan & Preliminary Drainage Report & Final Drainage Report for Filing 1*, by URS, January 2005.
10. *Final Drainage Report and Erosion Control Plan – Latigo Business Center Filing No. 1 A Re-subdivision of a Portion of Latigo Business and Research Center Filing No. 1*, by Kiowa Engineering Corporation, November 2004.

APPENDIX A
Exhibits and Figures



BENT GRASS

BENT GRASS MEADOWS DRIVE

SCALE: 1" = 2,000'

VICINITY MAP

Project No:

CLH00014.20

Drawn By:

CMWJ

Checked By:

RGD


Date:

04/02/2019


Galloway

1755 Telstar Drive, Suite 107
 Colorado Springs, CO 80920
 719.900.7220 • GallowayUS.com

Hydrologic Soil Group—El Paso County Area, Colorado

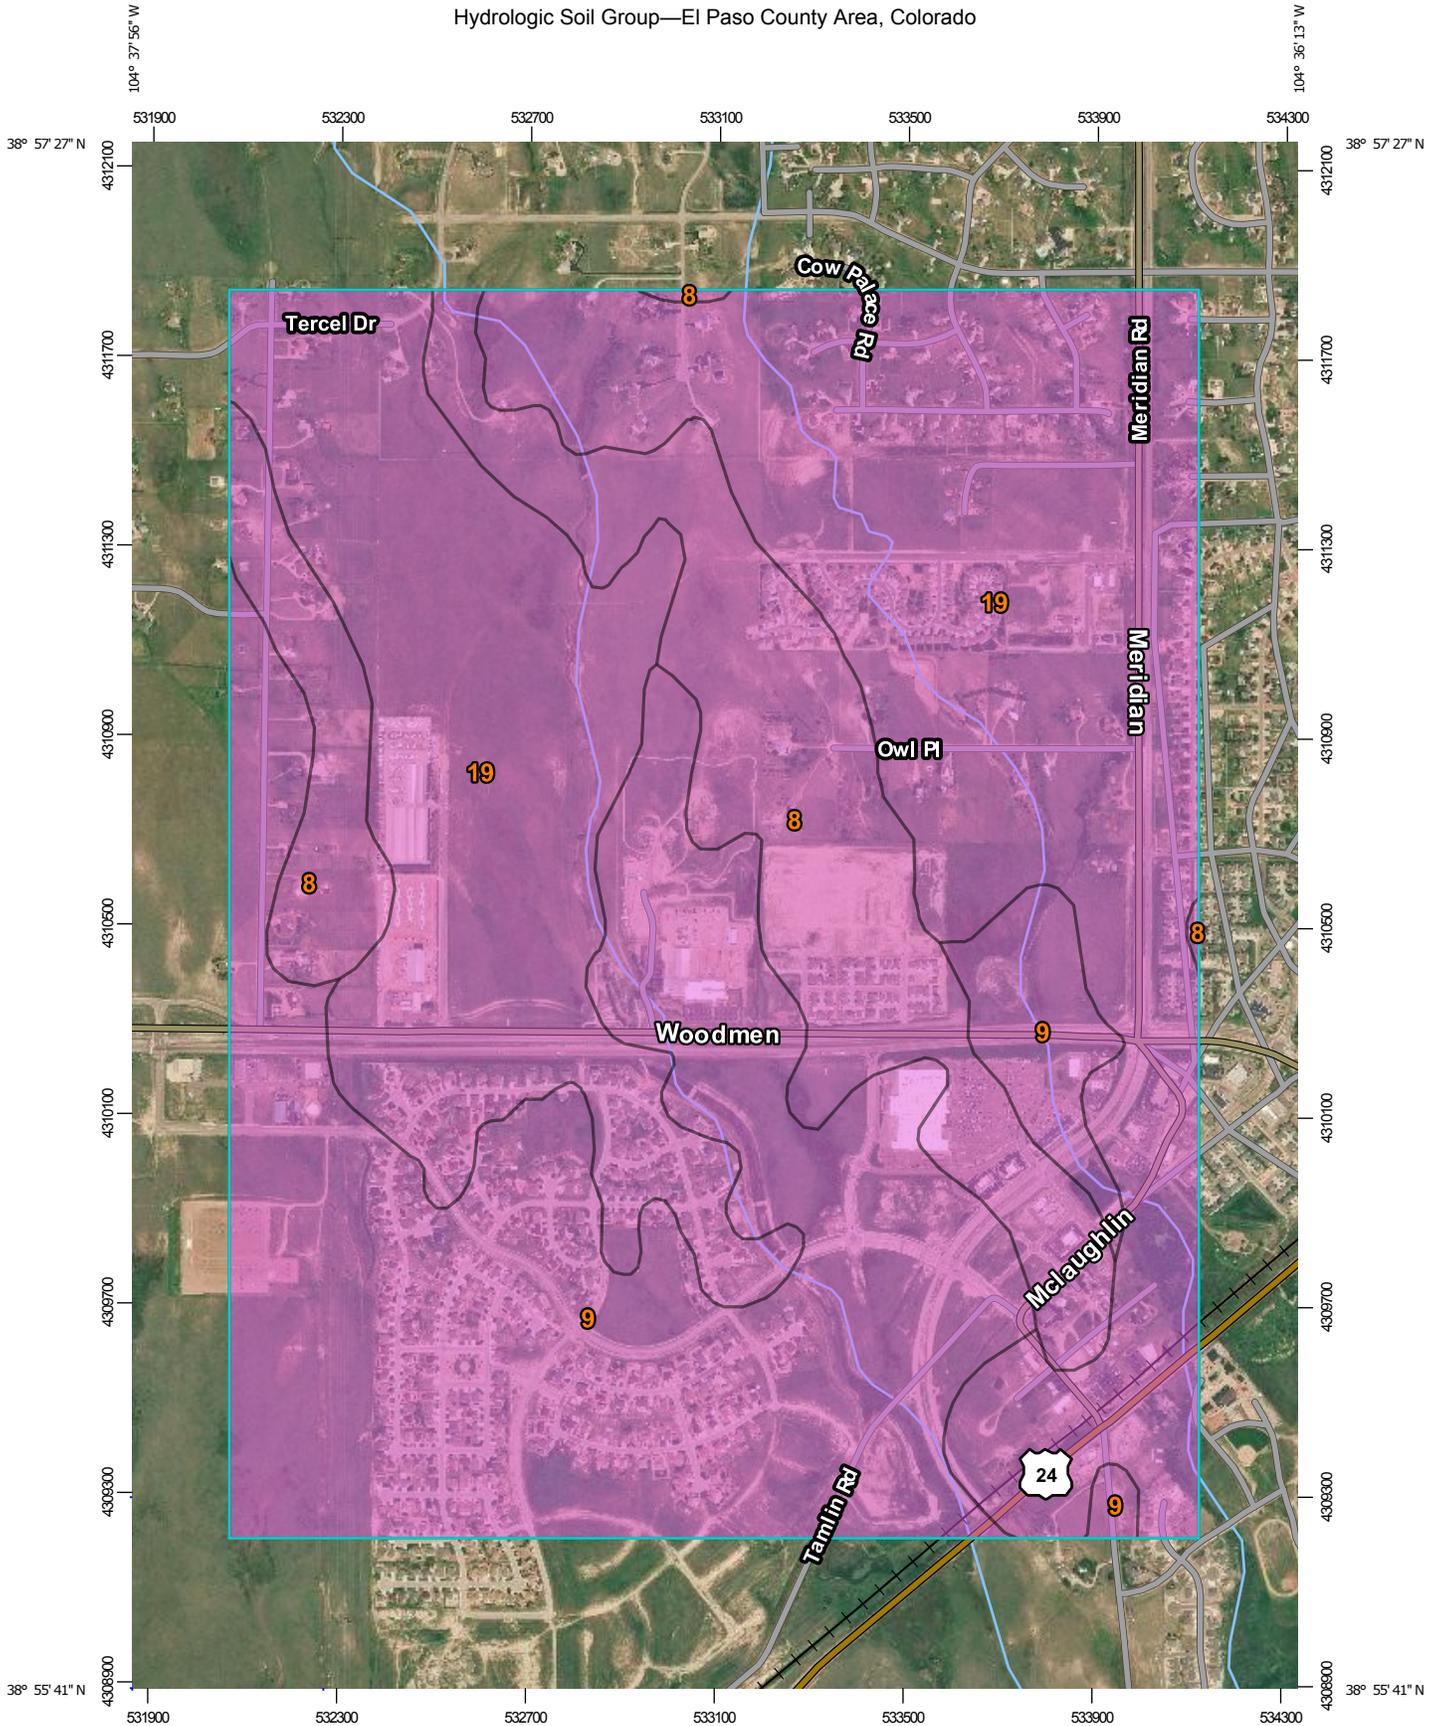

Map Scale: 1:15,900 if printed on A portrait (8.5" x 11") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84



Natural Resources
Conservation Service

Web Soil Survey
National Cooperative Soil Survey

4/2/2019
Page 1 of 4

MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)

Soils

Soil Rating Polygons

-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available

Soil Rating Lines

-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available

Soil Rating Points

-  A
-  A/D
-  B
-  B/D

-  C
-  C/D
-  D
-  Not rated or not available

Water Features

 Streams and Canals

Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado
 Survey Area Data: Version 16, Sep 10, 2018

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 7, 2016—Aug 17, 2017

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Hydrologic Soil Group

| Map unit symbol | Map unit name | Rating | Acres in AOI | Percent of AOI |
|------------------------------------|--|--------|----------------|----------------|
| 8 | Blakeland loamy sand, 1 to 9 percent slopes | A | 214.3 | 16.0% |
| 9 | Blakeland-Fluvaquentic Haplaquolls | A | 465.8 | 34.7% |
| 19 | Columbine gravelly sandy loam, 0 to 3 percent slopes | A | 662.6 | 49.3% |
| Totals for Area of Interest | | | 1,342.6 | 100.0% |

Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

Rating Options

Aggregation Method: Dominant Condition

Component Percent Cutoff: None Specified

Tie-break Rule: Higher

NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

Coastal Base Flood Elevations shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services
NOAA, NINGS12
National Geodetic Survey
SSMC-3, #9202
1315 East-West Highway
Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

Base Map information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, City of Fountain, Bureau of Land Management, National Oceanic and Atmospheric Administration, United States Geological Survey, and Anderson Consulting Engineers, Inc. These data are current as of 2006.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

Corporate limits shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.


Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.

Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FMIX) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9820 and its website at <http://www.msc.fema.gov/>.

If you have **questions about this map** or **questions concerning the National Flood Insurance Program** in general, please call **1-877-FEMA MAP (1-877-336-2627)** or visit the FEMA website at <http://www.fema.gov/business/nfp>.



| El Paso County Vertical Datum Offset Table | |
|---|----------------------------|
| Flooding Source | Vertical Datum Offset (ft) |
| REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION | |

Panel Location Map

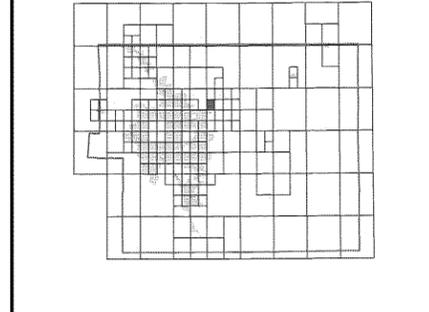

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).

Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

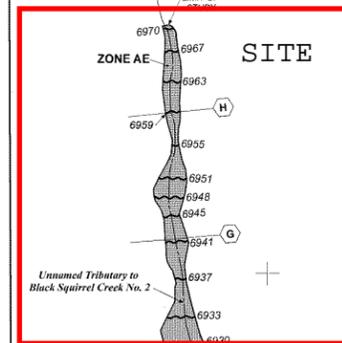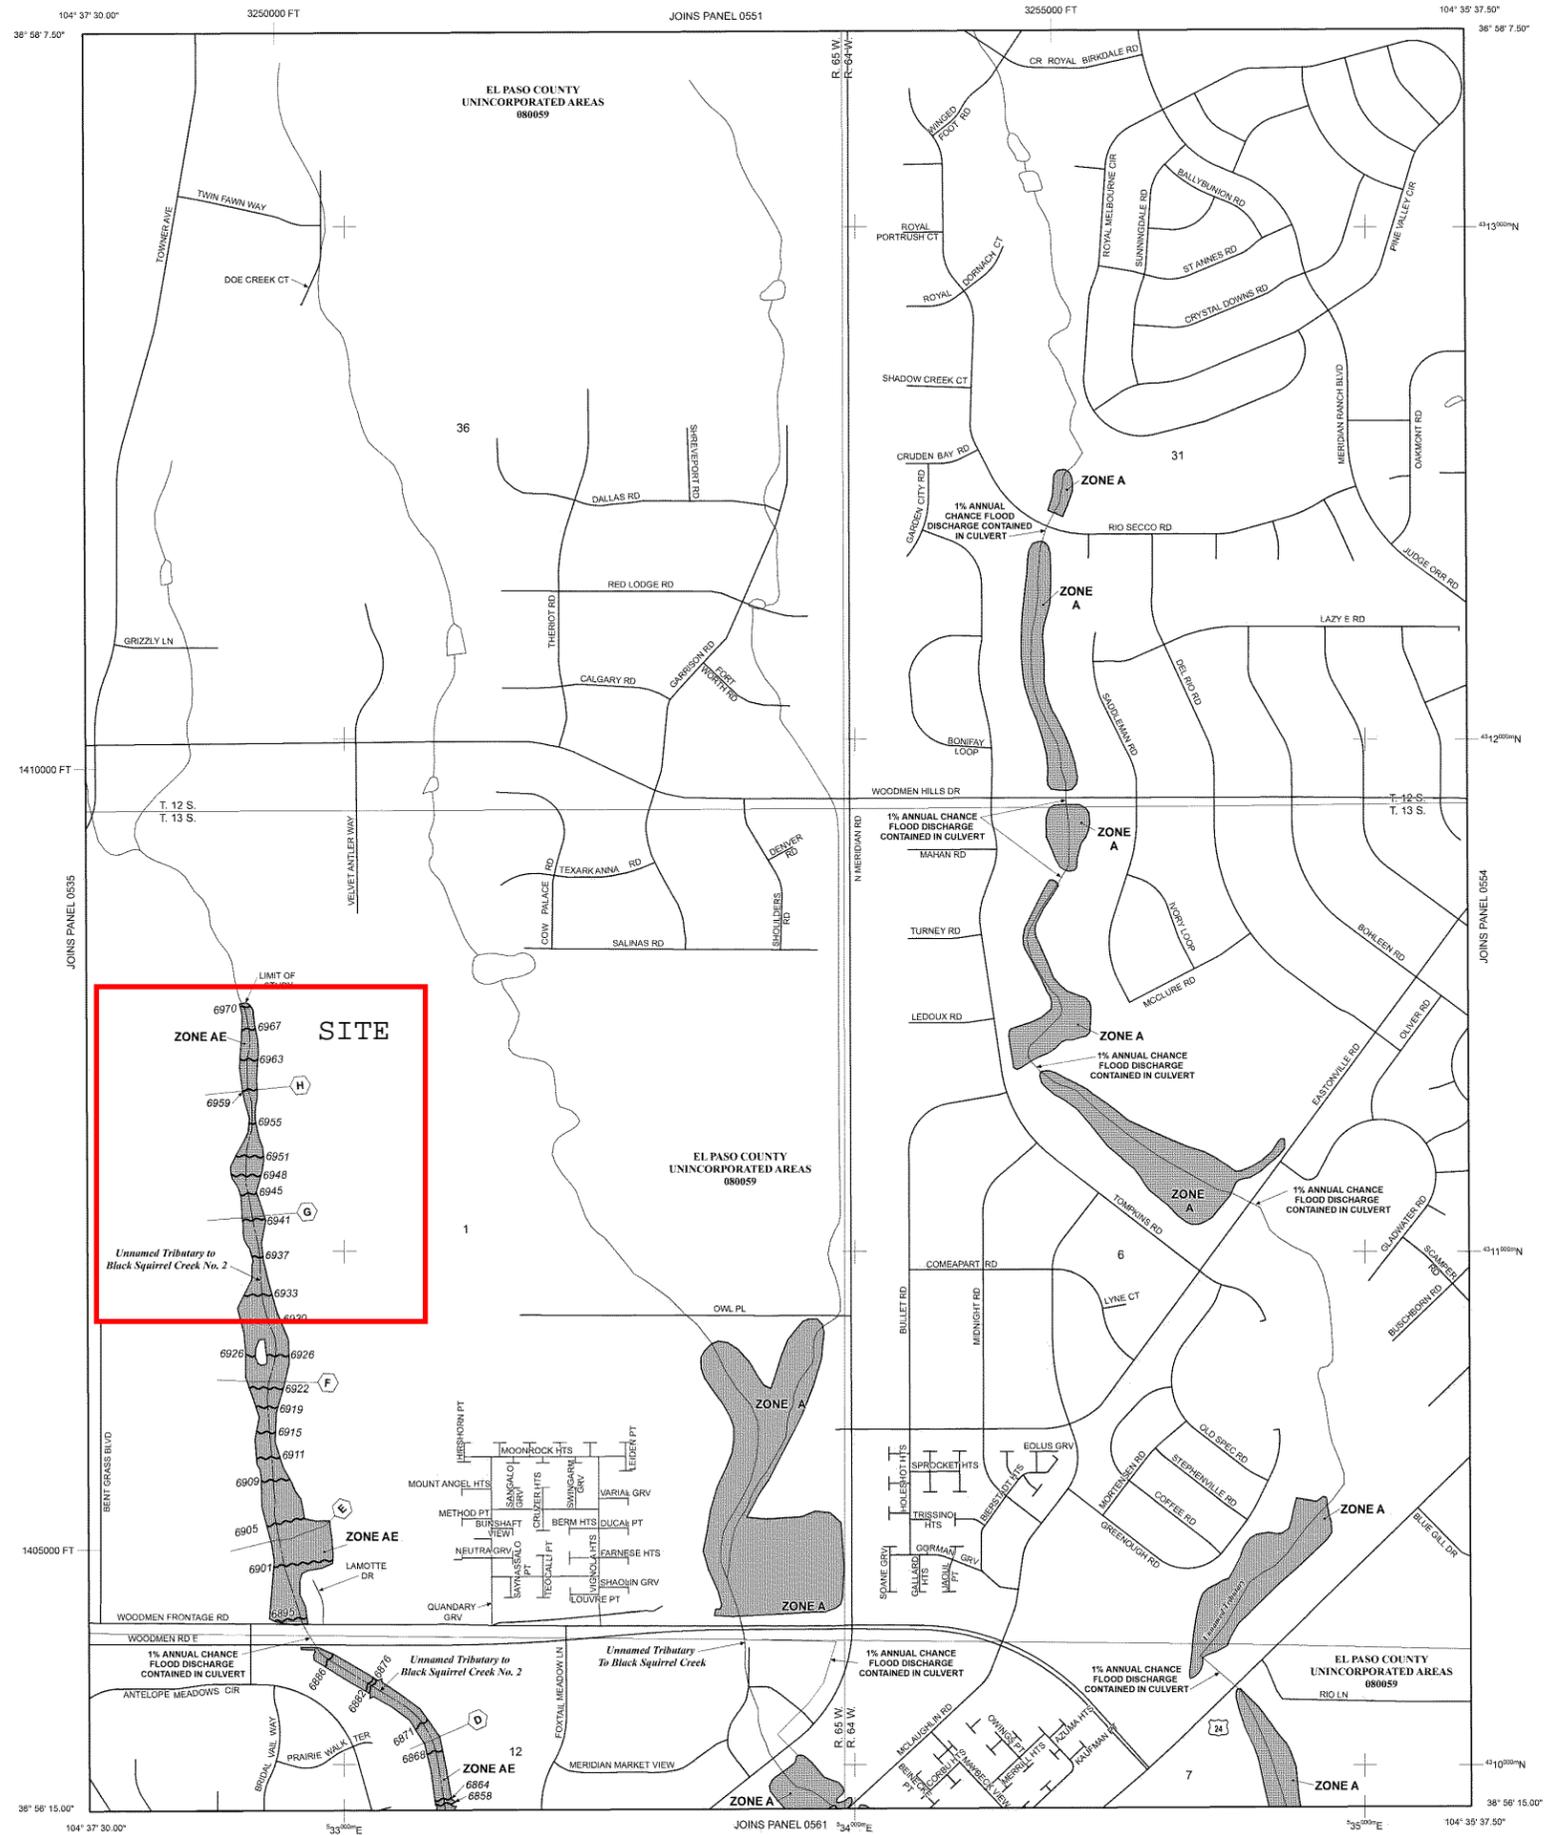

LEGEND

- SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD**
 - ZONE A** No Base Flood Elevations determined.
 - ZONE AE** Base Flood Elevations determined.
 - ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.
 - ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.
 - ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
 - ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.
 - ZONE V** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.
 - ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.
- FLOODWAY AREAS IN ZONE AE**
 - The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.
- OTHER FLOOD AREAS**
 - ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.
- OTHER AREAS**
 - ZONE X** Areas determined to be outside the 0.2% annual chance floodplain.
 - ZONE D** Areas in which flood hazards are undetermined, but possible.
- COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS**
- OTHERWISE PROTECTED AREAS (OPAs)**
 - CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.
- Boundaries**
 - Floodplain boundary
 - Floodway boundary
 - Zone D Boundary
 - CBRS and OPA boundary
- Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities**
- Base Flood Elevation line and value; elevation in feet* (EL 987)**
- Base Flood Elevation value where uniform within zone; elevation in feet***

* Referenced to the North American Vertical Datum of 1988 (NAVD 88)

- A-A** Cross section line
- 23-23** Transect line
- 97° 07' 30.00" 32° 22' 30.00"** Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)
- 4750000N** 1000-meter Universal Transverse Mercator grid ticks, zone 13
- 6000000 FT** 5000-foot grid ticks: Colorado State Plane coordinate system, central zone (FIPSZONE 0502), Lambert Conformal Conic Projection
- DX5510** Bench mark (see explanation in Notes to Users section of this FIRM panel)
- M1.5** River Mile

MAP REPOSITORIES
Refer to Map Repositories list on Map Index

EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP
MARCH 17, 1997

EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL
DECEMBER 7, 2018 - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision.

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

MAP SCALE 1" = 500'

NFP

PANEL 0553G

FIRM
FLOOD INSURANCE RATE MAP
EL PASO COUNTY, COLORADO AND INCORPORATED AREAS

PANEL 553 OF 1300
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:
COMMUNITY NUMBER PANEL SUFFIX
EL PASO COUNTY 08059 980 G

Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

MAP NUMBER 08041C0553G

MAP REVISED DECEMBER 7, 2018

Federal Emergency Management Agency

FALCON DRAINAGE BASIN PLANNING STUDY
SELECTED PLAN REPORT
FINAL - SEPTEMBER 2015

Prepared for:



El Paso County Public Services Department
3275 Akers Drive
Colorado Springs, CO 80922

Prepared By:



Matrix Design Group
2435 Research Parkway, Suite 300
Colorado Springs, CO 80920

Matrix Project No. 10.122.003


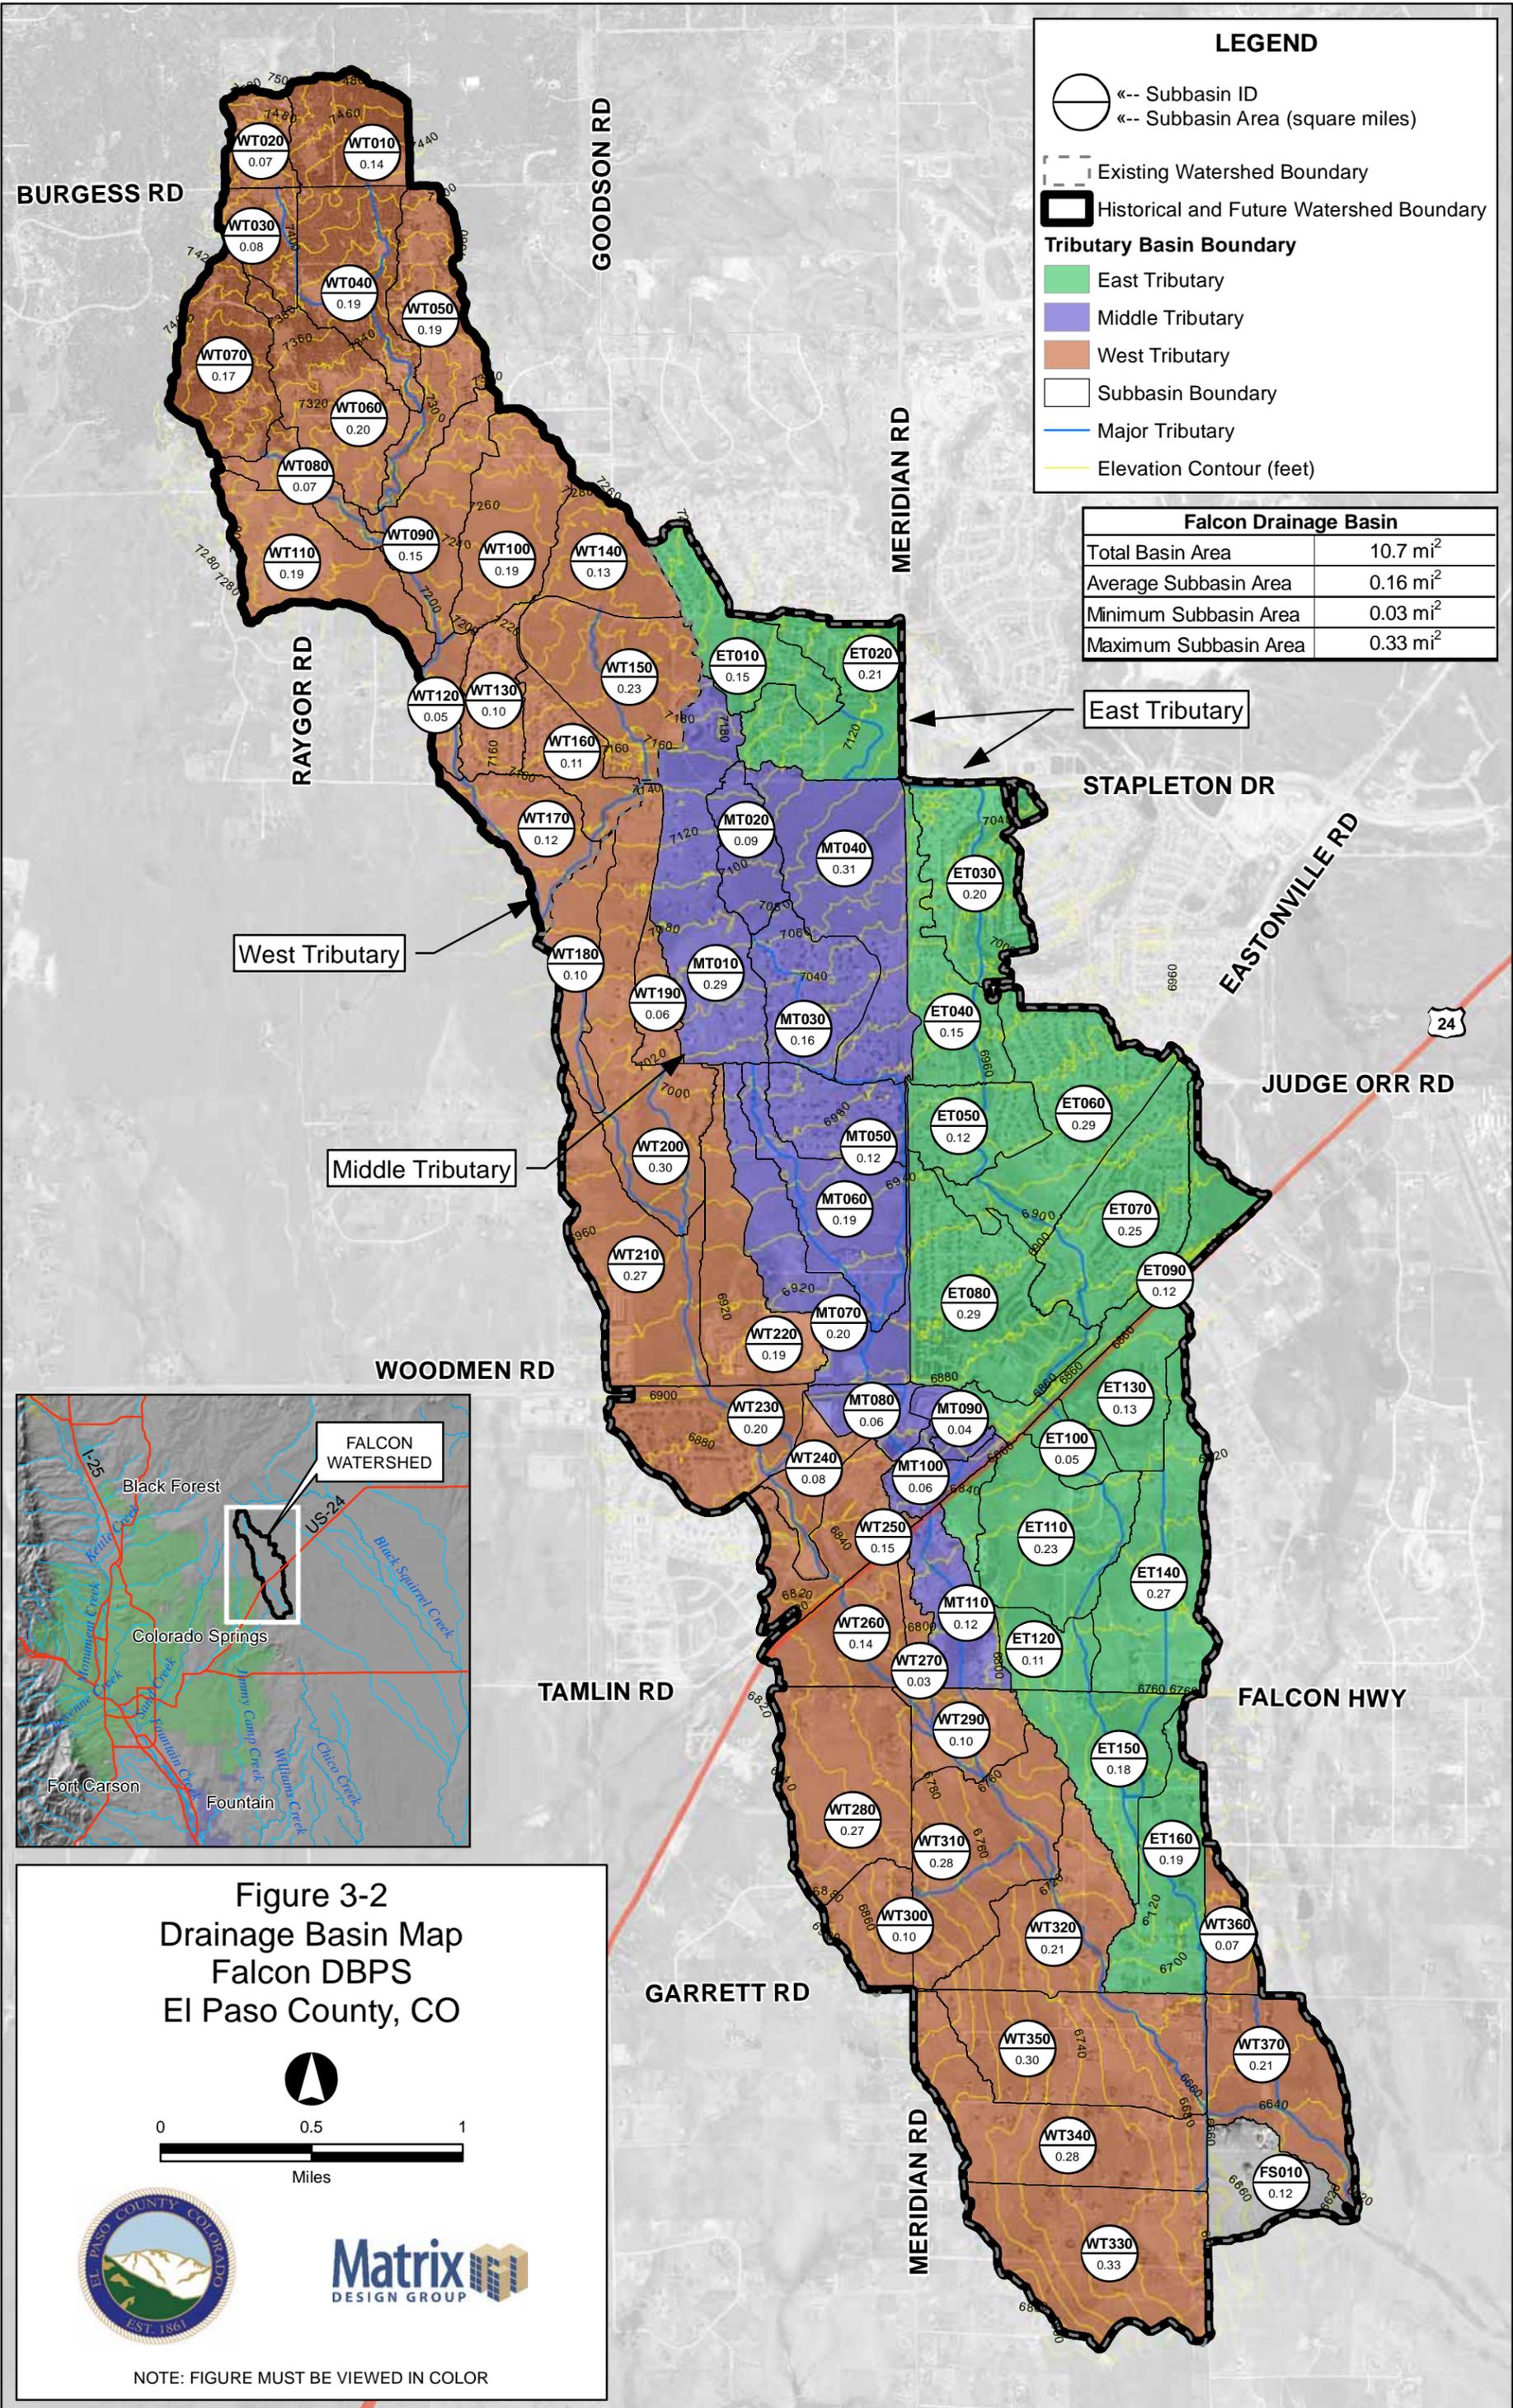


Figure 3-2
 Drainage Basin Map
 Falcon DBPS
 El Paso County, CO

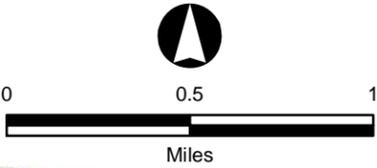

NOTE: FIGURE MUST BE VIEWED IN COLOR

| Sub Regional Detention Alternative ¹ | | | | | | |
|---|--------|-------------------------|--------------------------|---------------------------|----------------------------|-----------------------------------|
| Pond | | Q ₂ In (cfs) | Q ₂ Out (cfs) | Q ₁₀₀ In (cfs) | Q ₁₀₀ Out (cfs) | Required Volume (AF) ² |
| Paint Brush Hills Pond #4 | PBH 4 | 38 | 29 | 200 | 150 | 1.34 |
| Paint Brush Hills Pond A | PBH A | 35 | 7 | 170 | 140 | 2.62 |
| Paint Brush Hills Pond B1 | PBH B1 | 80 | 51 | 420 | 270 | 9.17 |
| Paint Brush Hills Pond B2 | PBH B2 | 51 | 10 | 270 | 180 | 12.09 |
| Paint Brush Hills Pond C | PBH C | 56 | 3 | 300 | 140 | 6.77 |
| Regional Pond MN | R MN | 65 | 32 | 850 | 820 | 7.53 |
| Regional Pond R1 | R R1 | 110 | 77 | 1,600 | 1,500 | 25.00 |
| Regional Pond R2 | R R2 | 140 | 140 | 2,100 | 2,100 | 7.90 |
| Regional Pond WU South | R WU | 47 | 22 | 1,070 | 930 | 39.54 |
| Sub Regional Pond SR1 | SR 1 | 54 | 42 | 610 | 510 | 11.03 |
| Sub Regional Pond SR2 | SR 2 | 65 | 65 | 840 | 840 | 2.05 |
| Sub Regional Pond SR3 | SR 3 | 72 | 72 | 910 | 910 | 1.03 |
| Sub Regional Pond SR4 | SR 4 | 130 | 27 | 1,000 | 730 | 19.37 |
| Sub Regional Pond SR6 | SR 6 | 74 | 9 | 390 | 200 | 11.82 |
| The Meadows Pond #1 | M 1 | 11 | 0 | 75 | 2 | 3.25 |
| The Meadows Pond #2 | M 2 | 28 | 5 | 210 | 99 | 7.94 |
| Woodmen Hills Pond #1 North | WH 1N | 65 | 61 | 390 | 260 | 7.13 |
| Woodmen Hills Pond #1 South | WH 1S | 61 | 10 | 260 | 260 | 8.78 |
| Woodmen Hills Pond #2 | WH 2 | 37 | 10 | 270 | 250 | 9.18 |
| Woodmen Hills Pond #3 | WH 3 | 105 | 13 | 530 | 360 | 8.35 |
| Woodmen Hills Pond #4 | WH 4 | 110 | 15 | 790 | 260 | 40.45 |
| Woodmen Hills Pond #5 | WH 5 | 40 | 1 | 130 | 19 | 4.10 |
| Woodmen Hills Pond H | WH H | 140 | 110 | 750 | 750 | 2.66 |

Notes
1: Represents future hydrology with retrofit existing detention ponds and 5 new subregional detention ponds
2: Required volume to highest WSE

| Reach Alternative | Total (ft) |
|---|------------|
| Protect In Place | 30,066 |
| Natural Channel Design | 32,359 |
| Small Drop Structures w/ Toe Protection | 76,812 |
| Large Drop Structures w/ Toe Protection | 0 |

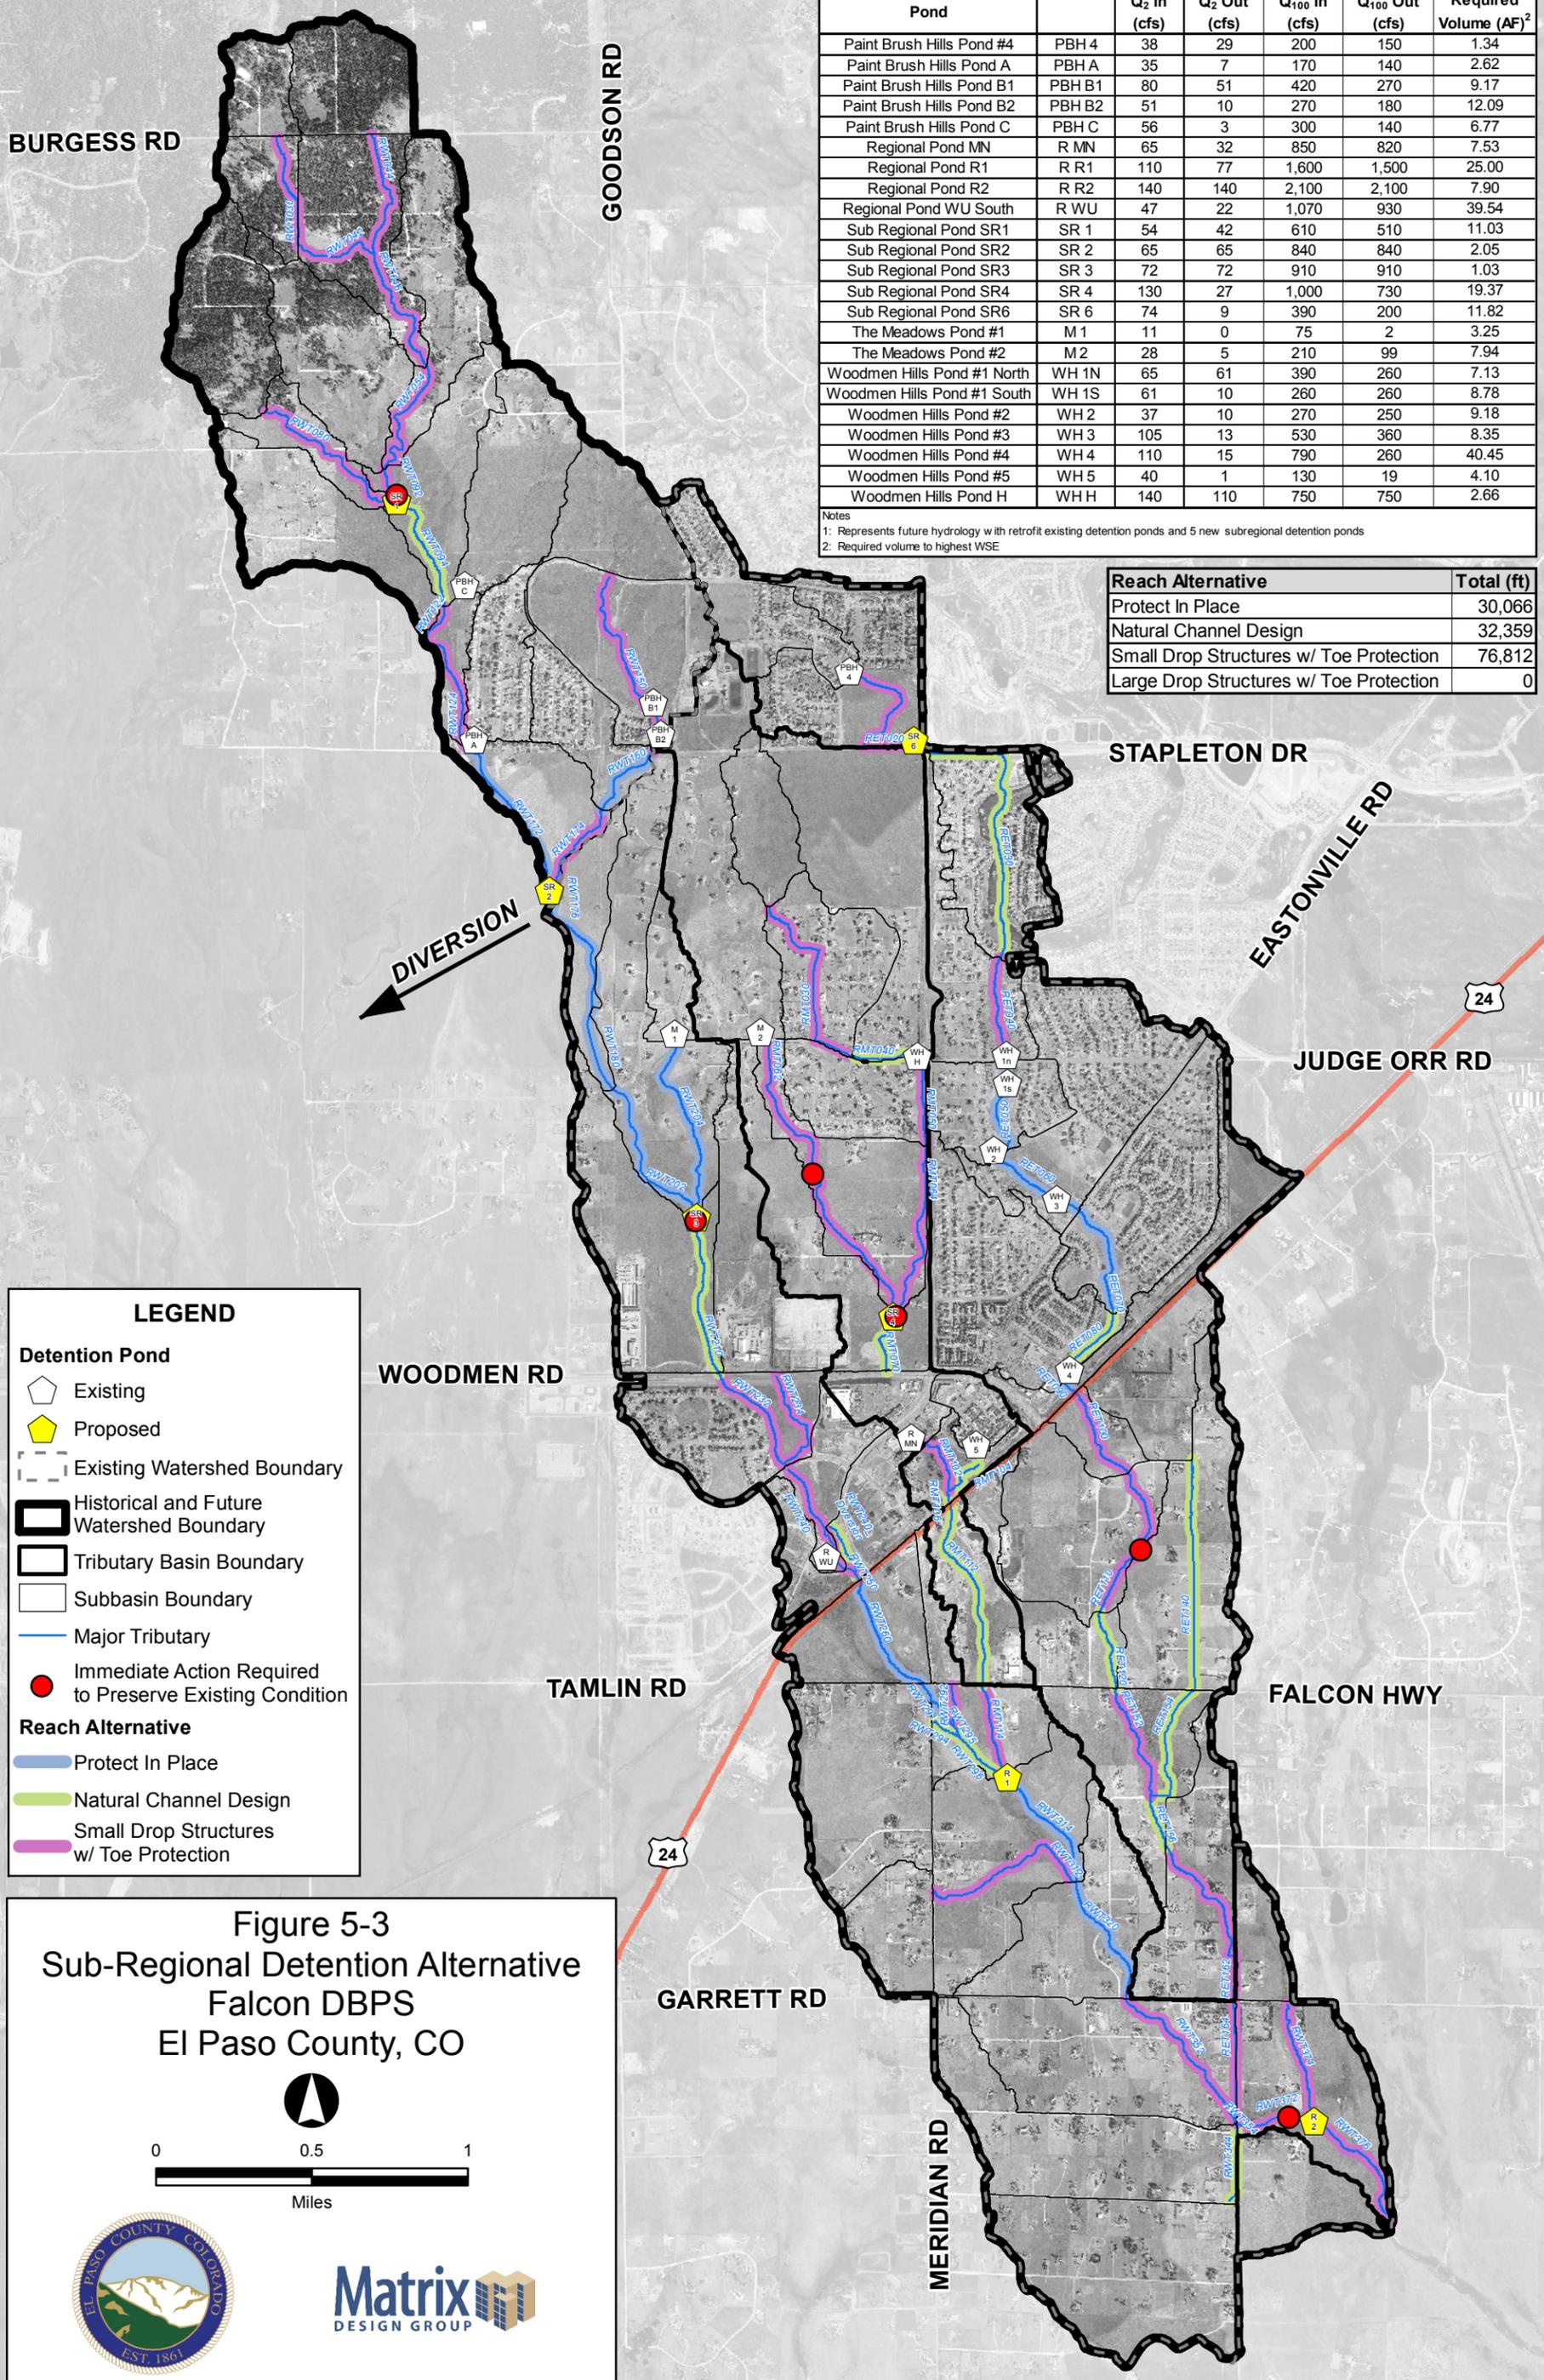


Figure 5-3
Sub-Regional Detention Alternative
Falcon DBPS
El Paso County, CO



NOTE: FIGURE MUST BE VIEWED IN COLOR

APPENDIX B
Hydrologic Computations

Existing Computations

COMPOSITE % IMPERVIOUS CALCULATIONS: EXISTING

Subdivision: Bent Grass Metro District
Location: CO, Colorado Springs

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: _____
Date: 10/25/19

| Basin ID | Total Area (ac) | Paved/Dirt Roads | | | Lawns | | | Roofs | | | Basins Total Weighted % Imp. |
|----------|-----------------|------------------|-----------|--------------------|--------|-----------|--------------------|--------|-----------|--------------------|------------------------------------|
| | | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | |
| A-1 | 5.42 | 100 | 0.16 | 3.00 | 2 | 5.26 | 1.90 | 90 | 0.00 | 0.00 | 4.9 |
| A-2 | 18.00 | 100 | 0.00 | 0.00 | 2 | 18.00 | 2.00 | 90 | 0.00 | 0.00 | 2.0 |
| A-3 | 19.59 | 100 | 0.00 | 0.00 | 2 | 19.59 | 2.00 | 90 | 0.00 | 0.00 | 2.0 |
| A-4 | 23.81 | 100 | 0.57 | 2.40 | 2 | 23.12 | 1.90 | 90 | 0.12 | 0.50 | 4.8 |
| B-1 | 32.53 | 100 | 0.00 | 0.00 | 2 | 32.53 | 2.00 | 90 | 0.00 | 0.00 | 2.0 |
| B-2 | 4.51 | 100 | 0.00 | 0.00 | 2 | 4.51 | 2.00 | 90 | 0.00 | 0.00 | 2.0 |
| B-3 | 16.18 | 100 | 1.00 | 6.20 | 2 | 15.18 | 1.90 | 90 | 0.00 | 0.00 | 8.1 |
| OS-1 | 13.06 | 100 | 0.84 | 6.40 | 2 | 11.65 | 1.80 | 90 | 0.57 | 3.90 | 12.1 |
| OS-2 | 17.81 | 100 | 2.00 | 11.20 | 2 | 15.18 | 1.70 | 90 | 0.63 | 3.20 | 16.1 |
| OS-3 | 9.99 | 100 | 0.69 | 6.90 | 2 | 9.08 | 1.80 | 90 | 0.22 | 2.00 | 10.7 |
| OS-4 | 30.69 | 100 | 1.42 | 4.60 | 2 | 28.41 | 1.90 | 90 | 0.86 | 2.50 | 9.0 |
| OS-5 | 14.13 | 100 | 0.17 | 1.20 | 2 | 13.74 | 1.90 | 90 | 0.22 | 1.40 | 4.5 |
| OS-6 | 5.81 | 100 | 0.00 | 0.00 | 2 | 5.81 | 2.00 | 90 | 0.00 | 0.00 | 2.0 |

COMPOSITE RUNOFF COEFFICIENT CALCULATIONS: EXISTING

Subdivision: Bent Grass Metro District
Location: CO, Colorado Springs

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: _____
Date: 10/25/19

| Basin ID | Total Area (ac) | Paved Roads | | | Lawns/Undeveloped | | | Roofs | | | Composite C ₅ | Composite C ₁₀₀ |
|----------|-----------------|----------------|------------------|-----------|-------------------|------------------|-----------|----------------|------------------|-----------|--------------------------|----------------------------|
| | | C ₅ | C ₁₀₀ | Area (ac) | C ₅ | C ₁₀₀ | Area (ac) | C ₅ | C ₁₀₀ | Area (ac) | | |
| A-1 | 5.42 | 0.90 | 0.96 | 0.16 | 0.09 | 0.36 | 5.26 | 0.73 | 0.81 | 0.00 | 0.11 | 0.38 |
| A-2 | 18.00 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 18.00 | 0.73 | 0.81 | 0.00 | 0.09 | 0.36 |
| A-3 | 19.59 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 19.59 | 0.73 | 0.81 | 0.00 | 0.09 | 0.36 |
| A-4 | 23.81 | 0.90 | 0.96 | 0.57 | 0.09 | 0.36 | 23.12 | 0.73 | 0.81 | 0.12 | 0.11 | 0.38 |
| B-1 | 32.53 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 32.53 | 0.73 | 0.81 | 0.00 | 0.09 | 0.36 |
| B-2 | 4.51 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 4.51 | 0.73 | 0.81 | 0.00 | 0.09 | 0.36 |
| B-3 | 16.18 | 0.90 | 0.96 | 1.00 | 0.09 | 0.36 | 15.18 | 0.73 | 0.81 | 0.00 | 0.14 | 0.40 |
| OS-1 | 13.06 | 0.90 | 0.96 | 0.84 | 0.09 | 0.36 | 11.65 | 0.73 | 0.81 | 0.57 | 0.17 | 0.42 |
| OS-2 | 17.81 | 0.90 | 0.96 | 2.00 | 0.09 | 0.36 | 15.18 | 0.73 | 0.81 | 0.63 | 0.20 | 0.44 |
| OS-3 | 9.99 | 0.90 | 0.96 | 0.69 | 0.09 | 0.36 | 9.08 | 0.73 | 0.81 | 0.22 | 0.16 | 0.41 |
| OS-4 | 30.69 | 0.90 | 0.96 | 1.42 | 0.09 | 0.36 | 28.41 | 0.73 | 0.81 | 0.86 | 0.15 | 0.40 |
| OS-5 | 14.13 | 0.90 | 0.96 | 0.17 | 0.09 | 0.36 | 13.74 | 0.73 | 0.81 | 0.22 | 0.11 | 0.37 |
| OS-6 | 5.81 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 5.81 | 0.73 | 0.81 | 0.00 | 0.09 | 0.36 |

C values are taken directly from Table 6-6 in the Colorado Springs DCM Vol. 1. (Referencing UDFCD 2001)

STANDARD FORM SF-2: EXISTING TIME OF CONCENTRATION

Subdivision: Bent Grass Metro District
Location: CO, Colorado Springs

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: _____
Date: 10/25/19

| SUB-BASIN | | | | | | INITIAL/OVERLAND | | | TRAVEL TIME | | | | | T _c CHECK | | | FINAL T _c (MIN) |
|-----------|-----------|------------------------|----------------|------------------|----------------|-------------------|-------|----------------------|-------------------|-------|----------------|------------|----------------------|----------------------------|------------------|--------------------------------|----------------------------------|
| DATA | | | | | | (T _i) | | | (T _i) | | | | | (URBANIZED BASINS) | | | |
| BASIN ID | D.A. (AC) | Hydrologic Soils Group | Impervious (%) | C ₁₀₀ | C ₅ | L (FT) | S (%) | T _i (MIN) | L (FT) | S (%) | C _v | VEL. (FPS) | T _i (MIN) | COMP. T _c (MIN) | TOTAL LENGTH(FT) | Urbanized T _c (MIN) | |
| A-1 | 5.42 | A | 4.90 | 0.38 | 0.11 | 300 | 2.5 | 22.9 | 466 | 2.5 | 15.0 | 2.4 | 3.3 | 26.2 | 766.0 | 14.3 | 14.3 |
| A-2 | 18.00 | A | 2.00 | 0.36 | 0.09 | 300 | 2.4 | 23.9 | 1130 | 2.0 | 15.0 | 2.1 | 8.9 | 32.8 | 1430.0 | 17.9 | 17.9 |
| A-3 | 19.59 | A | 2.00 | 0.36 | 0.09 | 300 | 2.7 | 23.0 | 760 | 2.7 | 15.0 | 2.5 | 5.1 | 28.1 | 1060.0 | 15.9 | 15.9 |
| A-4 | 23.81 | A | 4.80 | 0.38 | 0.11 | 300 | 2.0 | 24.9 | 1500 | 2.0 | 15.0 | 2.1 | 11.8 | 36.6 | 1800.0 | 20.0 | 20.0 |
| B-1 | 32.53 | A | 2.00 | 0.36 | 0.09 | 300 | 2.6 | 23.3 | 1100 | 2.6 | 15.0 | 2.4 | 7.6 | 30.9 | 1400.0 | 17.8 | 17.8 |
| B-2 | 4.51 | A | 2.00 | 0.36 | 0.09 | 300 | 3.0 | 22.2 | 323 | 5.0 | 15.0 | 3.4 | 1.6 | 23.8 | 623.0 | 13.5 | 13.5 |
| B-3 | 16.18 | A | 8.10 | 0.40 | 0.14 | 300 | 2.9 | 21.4 | 780 | 2.9 | 15.0 | 2.6 | 5.1 | 26.4 | 1080.0 | 16.0 | 16.0 |
| OS-1 | 13.06 | A | 12.10 | 0.42 | 0.17 | 300 | 2.5 | 21.7 | 1420 | 2.5 | 15.0 | 2.4 | 10.0 | 31.7 | 1720.0 | 19.6 | 19.6 |
| OS-2 | 17.81 | A | 16.10 | 0.44 | 0.20 | 300 | 2.3 | 21.5 | 1370 | 2.3 | 15.0 | 2.3 | 10.0 | 31.6 | 1670.0 | 19.3 | 19.3 |
| OS-3 | 9.99 | A | 10.70 | 0.41 | 0.16 | 300 | 2.0 | 23.7 | 850 | 2.0 | 15.0 | 2.1 | 6.7 | 30.3 | 1150.0 | 16.4 | 16.4 |
| OS-4 | 30.69 | A | 9.00 | 0.40 | 0.15 | 300 | 2.3 | 22.9 | 2600 | 2.3 | 15.0 | 2.3 | 19.0 | 42.0 | 2900.0 | 26.1 | 26.1 |
| OS-5 | 14.13 | A | 4.50 | 0.37 | 0.11 | 300 | 2.5 | 23.1 | 1400 | 3.0 | 15.0 | 2.6 | 9.0 | 32.1 | 1700.0 | 19.4 | 19.4 |
| OS-6 | 5.81 | A | 2.00 | 0.36 | 0.09 | 300 | 2.0 | 25.4 | 400 | 2.0 | 15.0 | 2.1 | 3.1 | 28.6 | 700.0 | 13.9 | 13.9 |

NOTES:

$T_i = (0.395 * (1.1 - C_5) * (L)^{0.5}) / ((S)^{0.33})$, S in ft/ft

$T_i = L / 60V$ (Velocity From Fig. 501)

Velocity $V = C_v * S^{0.5}$, S in ft/ft

$T_c \text{ Check} = 10 + L / 180$

For Urbanized basins a minimum T_c of 5.0 minutes is required.

For non-urbanized basins a minimum T_c of 10.0 minutes is required

**STANDARD FORM SF-3: EXISTING
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

Subdivision: Bent Grass Metro District
Location: CO, Colorado Springs
Design Storm: 5-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: _____
Date: 10/25/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|----------|-----------|---------|--------------|----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|--|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | OS-1 | 13.06 | 0.17 | 19.6 | 2.22 | 3.12 | 6.9 | | | | | | | | | | | | | |
| | 1 | A-1 | 5.42 | 0.11 | 14.3 | 0.62 | 3.60 | 2.2 | | | | | | | | | | | | | Total flow going offsite to Bent Grass F1 Residential |
| | 2 | A-2 | 18.00 | 0.09 | 17.9 | 1.62 | 3.25 | 5.3 | | | | | | | | | | | | | Total Flow entering Junction of RWT202&204 |
| | | OS-3 | 9.99 | 0.16 | 16.4 | 1.60 | 3.39 | 5.4 | | | | | | | | | | | | | |
| | | A-3 | 19.59 | 0.09 | 15.9 | 1.76 | 3.43 | 6.0 | | | | | | | | | | | | | |
| | 3 | | | | | | | | 16.4 | 3.36 | 3.39 | 11.4 | | | | | | | | | Total Flow entering Junction of RWT202&204 |
| | | OS-4 | 30.69 | 0.15 | 26.1 | 4.46 | 2.69 | 12.0 | | | | | | | | | | | | | |
| | | A-4 | 23.81 | 0.11 | 20.0 | 2.68 | 3.09 | 8.3 | | | | | | | | | | | | | |
| | 4 | | | | | | | | 26.1 | 7.14 | 2.69 | 19.2 | | | | | | | | | |
| | 5 | B-1 | 32.53 | 0.09 | 17.8 | 2.93 | 3.27 | 9.6 | | | | | | | | | | | | | |
| | 6 | B-2 | 4.51 | 0.09 | 13.5 | 0.41 | 3.68 | 1.5 | | | | | | | | | | | | | |
| | 7 | B-3 | 16.18 | 0.14 | 16.0 | 2.27 | 3.42 | 7.8 | | | | | | | | | | | | | |
| | 8 | | | | | | | 4.0 | | | | | | | | | | | | | RWT204 - Per Matrix DBPS Existing Hydrology |
| | 9 | | | | | | | 0.0 | | | | | | | | | | | | | RWT202 - Per Matrix DBPS Existing Hydrology |
| | 10 | | | | | | | 14.0 | | | | | | | | | | | | | RWT210 - Per Matrix DBPS Existing Hydrology |
| | 11 | OS-5 | 14.13 | 0.11 | 19.4 | 1.55 | 3.13 | 4.9 | | | | | | | | | | | | | Flows into Basin OS-6 |
| | 12 | OS-6 | 5.81 | 0.09 | 13.9 | 0.52 | 3.64 | 1.9 | | | | | | | | | | | | | Existing Sediment Pond in Basin and then flows to Bent Grass Meadows Drive |

**STANDARD FORM SF-3: EXISTING
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

Subdivision: Bent Grass Metro District
Location: CO, Colorado Springs
Design Storm: 100-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By:
Date: 10/25/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|----------|-----------|---------|--------------|----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|--|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | | OS-1 | 13.06 | 0.42 | 19.6 | 5.46 | 5.24 | 28.6 | | | | | | | | | | | | | |
| | 1 | A-1 | 5.42 | 0.38 | 14.3 | 2.05 | 6.04 | 12.4 | | | | | | | | | | | | | Total flow going offsite to Bent Grass F1 Residential |
| | 2 | A-2 | 18.00 | 0.36 | 17.9 | 6.48 | 5.46 | 35.4 | | | | | | | | | | | | | Total Flow entering Junction of RWT202&204 |
| | | OS-3 | 9.99 | 0.41 | 16.4 | 4.11 | 5.69 | 23.4 | | | | | | | | | | | | | |
| | | A-3 | 19.59 | 0.36 | 15.9 | 7.05 | 5.77 | 40.7 | | | | | | | | | | | | | |
| | 3 | | | | | | | | 16.4 | 11.16 | 5.69 | 63.5 | | | | | | | | | Total Flow entering Junction of RWT202&204 |
| | | OS-4 | 30.69 | 0.40 | 26.1 | 12.29 | 4.51 | 55.4 | | | | | | | | | | | | | |
| | | A-4 | 23.81 | 0.38 | 20.0 | 8.97 | 5.19 | 46.6 | | | | | | | | | | | | | |
| | 4 | | | | | | | | 26.1 | 21.26 | 4.51 | 95.9 | | | | | | | | | |
| | 5 | B-1 | 32.53 | 0.36 | 17.8 | 11.71 | 5.48 | 64.2 | | | | | | | | | | | | | |
| | 6 | B-2 | 4.51 | 0.36 | 13.5 | 1.62 | 6.18 | 10.0 | | | | | | | | | | | | | |
| | 7 | B-3 | 16.18 | 0.40 | 16.0 | 6.42 | 5.75 | 36.9 | | | | | | | | | | | | | |
| | 8 | | | | | | | 43.0 | | | | | | | | | | | | | RWT204 - Per Matrix DBPS Existing Hydrology |
| | 9 | | | | | | | 770 | | | | | | | | | | | | | RWT202 - Per Matrix DBPS Existing Hydrology |
| | 10 | | | | | | | 880 | | | | | | | | | | | | | RWT210 - Per Matrix DBPS Existing Hydrology |
| | 11 | OS-5 | 14.13 | 0.37 | 19.4 | 5.29 | 5.26 | 27.8 | | | | | | | | | | | | | Flows into Basin OS-6 |
| | 12 | OS-6 | 5.81 | 0.36 | 13.9 | 2.09 | 6.10 | 12.7 | | | | | | | | | | | | | Existing Sediment Pond in Basin and then flows to Bent Grass Meadows Drive |

Proposed Computations

COMPOSITE % IMPERVIOUS CALCULATIONS: PROPOSED

Subdivision: Bent Grass Residential Filing No. 2
 Location: CO, Colorado Springs

Project Name: Bent Grass
 Project No.: CLH000014.20
 Calculated By: CMWJ
 Checked By: SMB
 Date: 10/18/19

| Basin ID | Total Area (ac) | Paved/Gravel Roads | | | Lawns/Undeveloped | | | Roofs | | | Residential - 1/8 Acre | | | Residential - 1/4 Acre | | | Residential - 1/3 Acre | | | Residential - 1/2 Acre | | | Residential - 1 Acre | | | Basins Total Weighted % Imp. |
|----------|-----------------|--------------------|-----------|-----------------|-------------------|-----------|-----------------|--------|-----------|-----------------|------------------------|-----------|-----------------|------------------------|-----------|-----------------|------------------------|-----------|-----------------|------------------------|-----------|-----------------|----------------------|-----------|-----------------|------------------------------|
| | | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | % Imp. | Area (ac) | Weighted % Imp. | |
| A-1 | 2.70 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 1.18 | 28.4 | 40 | 0.68 | 10.1 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.84 | 6.2 | 44.7 |
| A-2 | 1.19 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.37 | 20.2 | 40 | 0.56 | 18.8 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.26 | 4.4 | 43.4 |
| A-3 | 1.57 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.59 | 24.4 | 40 | 0.98 | 25.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 49.4 |
| A-4 | 2.24 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.93 | 27.0 | 40 | 0.88 | 15.7 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.43 | 3.8 | 46.5 |
| B-1 | 4.46 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 2.28 | 33.2 | 40 | 1.46 | 13.1 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.72 | 3.2 | 49.5 |
| B-2 | 1.17 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 1.17 | 65.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 65.0 |
| B-3 | 0.46 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.46 | 65.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 65.0 |
| B-4 | 1.19 | 100 | 0.00 | 0.0 | 2 | 1.19 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| B-5 | 1.56 | 100 | 0.00 | 0.0 | 2 | 1.56 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| B-6 | 0.62 | 100 | 0.00 | 0.0 | 2 | 0.62 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| C-1 | 1.35 | 100 | 0.03 | 2.1 | 2 | 0.16 | 0.2 | 90 | 0.00 | 0.0 | 65.0 | 1.16 | 55.9 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 58.2 |
| C-2 | 7.81 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 2.86 | 23.8 | 40 | 3.01 | 15.4 | 30 | 0.70 | 2.7 | 25 | 1.24 | 4.0 | 20 | 0.00 | 0.0 | 45.9 |
| C-3 | 2.38 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 1.61 | 44.0 | 40 | 0.77 | 12.9 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 56.9 |
| C-4 | 3.61 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 2.86 | 51.4 | 40 | 0.75 | 8.4 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 59.8 |
| C-5 | 7.86 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 6.53 | 54.0 | 40 | 1.33 | 6.8 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 60.8 |
| C-6 | 5.54 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 3.14 | 36.8 | 40 | 1.60 | 11.6 | 30 | 0.80 | 4.3 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 52.7 |
| C-7 | 0.76 | 100 | 0.00 | 0.0 | 2 | 0.76 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| C-8 | 0.92 | 100 | 0.00 | 0.0 | 2 | 0.92 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| D-1 | 12.85 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 3.65 | 18.5 | 40 | 5.89 | 18.3 | 30 | 0.75 | 1.8 | 25 | 0.00 | 0.0 | 20 | 2.56 | 4.0 | 42.6 |
| D-2 | 3.19 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 1.63 | 33.2 | 40 | 0.91 | 11.4 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.65 | 4.1 | 48.7 |
| D-3 | 9.16 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.82 | 5.8 | 40 | 5.88 | 25.7 | 30 | 1.86 | 6.1 | 25 | 0.60 | 1.6 | 20 | 0.00 | 0.0 | 39.2 |
| D-4 | 9.53 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.88 | 3.7 | 30 | 5.94 | 18.7 | 25 | 1.63 | 4.3 | 20 | 1.08 | 2.3 | 29.0 |
| E-1 | 1.71 | 100 | 0.78 | 45.6 | 2 | 0.23 | 0.3 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.70 | 16.4 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 62.3 |
| E-2 | 0.68 | 100 | 0.56 | 82.4 | 2 | 0.12 | 0.4 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 82.8 |
| E-3 | 0.78 | 100 | 0.69 | 88.5 | 2 | 0.09 | 0.2 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 88.7 |
| E-4 | 0.91 | 100 | 0.73 | 80.2 | 2 | 0.18 | 0.4 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 80.6 |
| E-5 | 0.89 | 100 | 0.79 | 88.8 | 2 | 0.10 | 0.2 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 89.0 |
| F-1 | 0.46 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.43 | 37.4 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.03 | 1.3 | 38.7 |
| F-2 | 0.62 | 100 | 0.28 | 45.2 | 2 | 0.11 | 0.4 | 90 | 0.00 | 0.0 | 65.0 | 0.23 | 24.1 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 69.7 |
| G-1 | 0.98 | 100 | 0.00 | 0.0 | 2 | 0.98 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| H-1 | 0.31 | 100 | 0.22 | 71.0 | 2 | 0.09 | 0.6 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 71.6 |
| OS-1 | 32.28 | 100 | 2.15 | 6.7 | 2 | 29.25 | 1.8 | 90 | 0.88 | 2.5 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 11.0 |
| OS-2 | 20.08 | 80 | 0.90 | 3.6 | 2 | 18.62 | 1.9 | 90 | 0.56 | 2.5 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 8.0 |
| OS-3 | 10.62 | 80 | 0.48 | 3.6 | 2 | 9.84 | 1.9 | 90 | 0.30 | 2.5 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 8.0 |
| OS-4 | 2.64 | 100 | 0.00 | 0.0 | 2 | 2.64 | 2.0 | 90 | 0.00 | 0.0 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 2.0 |
| OS-5 | 14.13 | 100 | 0.17 | 1.2 | 2 | 13.74 | 1.9 | 90 | 0.22 | 1.4 | 65.0 | 0.00 | 0.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 4.5 |
| OS-6 | 5.38 | 100 | 0.00 | 0.0 | 2 | 0.00 | 0.0 | 90 | 0.00 | 0.0 | 65.0 | 5.38 | 65.0 | 40 | 0.00 | 0.0 | 30 | 0.00 | 0.0 | 25 | 0.00 | 0.0 | 20 | 0.00 | 0.0 | 65.0 |

| Lot Type Identification: | |
|--------------------------|-----------------|
| Lot Size (SF) | Lot Size (Acre) |
| 0 - 8,167 | 1/8 Acre |
| 8,168 - 12,704 | 1/4 Acre |
| 12,705 - 18,149 | 1/3 Acre |
| 18,150 - 32,670 | 1/2 Acre |
| 32,671 - 43,560 | 1 Acre |

NOTES:
 % Impervious values are taken directly from Table 6-6 in the Colorado Springs DCM Vol. 1. CH. 6 (Referencing UDFCD 2001)

COMPOSITE RUNOFF COEFFICIENT CALCULATIONS: PROPOSED

Subdivision: Bent Grass Residential Filing No. 2
 Location: CO, Colorado Springs

Project Name: Bent Grass
 Project No.: CLH000014.20
 Calculated By: CMWJ
 Checked By: SMB
 Date: 10/18/19

| Basin ID | Total Area (ac) | Paved/Gravel Roads | | | Lawns/Undeveloped | | | Roofs | | | Residential - 1/8 Acre | | | Residential - 1/4 Acre | | | Residential - 1/3 Acre | | | Residential - 1/2 Acre | | | Residential - 1 Acre | | | Composite C _s | Composite C ₁₀₀ |
|----------|-----------------|--------------------|------------------|-----------|-------------------|------------------|-----------|----------------|------------------|-----------|------------------------|------------------|-----------|------------------------|------------------|-----------|------------------------|------------------|-----------|------------------------|------------------|-----------|----------------------|------------------|-----------|--------------------------|----------------------------|
| | | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | C _s | C ₁₀₀ | Area (ac) | | |
| A-1 | 2.70 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 1.18 | 0.30 | 0.50 | 0.68 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.84 | 0.33 | 0.52 |
| A-2 | 1.19 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.37 | 0.30 | 0.50 | 0.56 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.26 | 0.32 | 0.51 |
| A-3 | 1.57 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.59 | 0.30 | 0.50 | 0.98 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.36 | 0.53 |
| A-4 | 2.24 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.93 | 0.30 | 0.50 | 0.88 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.43 | 0.34 | 0.53 |
| B-1 | 4.46 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 2.28 | 0.30 | 0.50 | 1.46 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.72 | 0.36 | 0.54 |
| B-2 | 1.17 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 1.17 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.45 | 0.59 |
| B-3 | 0.46 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.46 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.45 | 0.59 |
| B-4 | 1.19 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 1.19 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| B-5 | 1.56 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 1.56 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| B-6 | 0.62 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.62 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| C-1 | 1.35 | 0.90 | 0.96 | 0.03 | 0.09 | 0.36 | 0.16 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 1.16 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.42 | 0.57 |
| C-2 | 7.81 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 2.86 | 0.30 | 0.50 | 3.01 | 0.25 | 0.47 | 0.70 | 0.22 | 0.46 | 1.24 | 0.20 | 0.44 | 0.00 | 0.34 | 0.52 |
| C-3 | 2.38 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 1.61 | 0.30 | 0.50 | 0.77 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.40 | 0.56 |
| C-4 | 3.61 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 2.86 | 0.30 | 0.50 | 0.75 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.42 | 0.57 |
| C-5 | 7.86 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 6.53 | 0.30 | 0.50 | 1.33 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.42 | 0.57 |
| C-6 | 5.54 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 3.14 | 0.30 | 0.50 | 1.60 | 0.25 | 0.47 | 0.80 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.38 | 0.55 |
| C-7 | 0.76 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.76 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| C-8 | 0.92 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.92 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| D-1 | 12.85 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 3.65 | 0.30 | 0.50 | 5.89 | 0.25 | 0.47 | 0.75 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 2.56 | 0.32 | 0.51 |
| D-2 | 3.19 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 1.63 | 0.30 | 0.50 | 0.91 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.65 | 0.36 | 0.53 |
| D-3 | 9.16 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.82 | 0.30 | 0.50 | 5.88 | 0.25 | 0.47 | 1.86 | 0.22 | 0.46 | 0.60 | 0.20 | 0.44 | 0.00 | 0.30 | 0.50 |
| D-4 | 9.53 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.88 | 0.25 | 0.47 | 5.94 | 0.22 | 0.46 | 1.63 | 0.20 | 0.44 | 1.08 | 0.24 | 0.47 |
| E-1 | 1.71 | 0.90 | 0.96 | 0.78 | 0.09 | 0.36 | 0.23 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.70 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.55 | 0.69 |
| E-2 | 0.68 | 0.90 | 0.96 | 0.56 | 0.09 | 0.36 | 0.12 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.76 | 0.85 |
| E-3 | 0.78 | 0.90 | 0.96 | 0.69 | 0.09 | 0.36 | 0.09 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.81 | 0.89 |
| E-4 | 0.91 | 0.90 | 0.96 | 0.73 | 0.09 | 0.36 | 0.18 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.74 | 0.84 |
| E-5 | 0.89 | 0.90 | 0.96 | 0.79 | 0.09 | 0.36 | 0.10 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.81 | 0.89 |
| F-1 | 0.46 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.43 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.03 | 0.29 | 0.50 |
| F-2 | 0.62 | 0.90 | 0.96 | 0.28 | 0.09 | 0.36 | 0.11 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.23 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.59 | 0.72 |
| G-1 | 0.98 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.98 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| H-1 | 0.31 | 0.90 | 0.96 | 0.22 | 0.09 | 0.36 | 0.09 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.66 | 0.79 |
| OS-1 | 32.28 | 0.90 | 0.96 | 2.15 | 0.09 | 0.36 | 29.25 | 0.73 | 0.81 | 0.88 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.16 | 0.41 |
| OS-2 | 20.08 | 0.90 | 0.96 | 0.90 | 0.09 | 0.36 | 18.62 | 0.73 | 0.81 | 0.56 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.14 | 0.40 |
| OS-3 | 10.62 | 0.90 | 0.96 | 0.48 | 0.09 | 0.36 | 9.84 | 0.73 | 0.81 | 0.30 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.14 | 0.40 |
| OS-4 | 2.64 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 2.64 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.09 | 0.36 |
| OS-5 | 14.13 | 0.90 | 0.96 | 0.17 | 0.09 | 0.36 | 13.74 | 0.73 | 0.81 | 0.22 | 0.45 | 0.59 | 0.00 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.11 | 0.37 |
| OS-6 | 5.38 | 0.90 | 0.96 | 0.00 | 0.09 | 0.36 | 0.00 | 0.73 | 0.81 | 0.00 | 0.45 | 0.59 | 5.38 | 0.30 | 0.50 | 0.00 | 0.25 | 0.47 | 0.00 | 0.22 | 0.46 | 0.00 | 0.20 | 0.44 | 0.00 | 0.45 | 0.59 |

| Lot Type Identification: | |
|--------------------------|-----------------|
| Lot Size (SF) | Lot Size (Acre) |
| 0 - 8,167 | <= 1/8 Acre |
| 8,168 - 12,704 | 1/4 Acre |
| 12,705 - 18,149 | 1/3 Acre |
| 18,150 - 32,670 | 1/2 Acre |
| 32,671 - 43,560 | 1 Acre |

NOTES:
 C values are taken directly from Table 6-6 in the Colorado Springs DCM Vol. 1, CH. 6 (Referencing UDFCD 2001)
 Coefficients use HSG A&B soils - Refer to "Appendix A: Exhibits and Figures" for soil map

STANDARD FORM SF-2: PROPOSED TIME OF CONCENTRATION

Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19

| SUB-BASIN | | | | | | INITIAL/OVERLAND | | | TRAVEL TIME | | | | | Tc CHECK | | | FINAL |
|-----------|-----------|------------------------|----------------|----------------|------------------|-------------------|-------|----------------------|-------------------|-------|----------------|------------|----------------------|----------------------------|------------------|--------------------------------|----------------------|
| DATA | | | | | | (T _i) | | | (T _j) | | | | | (URBANIZED BASINS) | | | (T _c) |
| BASIN ID | D.A. (AC) | Hydrologic Soils Group | Impervious (%) | C _s | C ₁₀₀ | L (FT) | S (%) | T _i (MIN) | L (FT) | S (%) | C _v | VEL. (FPS) | T _j (MIN) | COMP. T _c (MIN) | TOTAL LENGTH(FT) | Urbanized T _c (MIN) | T _c (MIN) |
| A-1 | 2.70 | A | 44.7 | 0.33 | 0.52 | 100 | 1.3 | 12.8 | 550 | 1.3 | 20 | 2.3 | 4.0 | 16.8 | 650.0 | 13.6 | 13.6 |
| A-2 | 1.19 | A | 43.4 | 0.32 | 0.51 | 100 | 4.3 | 8.8 | 310 | 2.3 | 20 | 3.0 | 1.7 | 10.5 | 410.0 | 12.3 | 10.5 |
| A-3 | 1.57 | A | 49.4 | 0.36 | 0.53 | 70 | 1.0 | 11.3 | 680 | 1.2 | 20 | 2.2 | 5.2 | 16.5 | 750.0 | 14.2 | 14.2 |
| A-4 | 2.24 | A | 46.5 | 0.34 | 0.53 | 100 | 4.2 | 8.6 | 650 | 1.7 | 20 | 2.6 | 4.2 | 12.8 | 750.0 | 14.2 | 12.8 |
| B-1 | 4.46 | A | 49.5 | 0.36 | 0.54 | 100 | 2.0 | 10.8 | 910 | 1.2 | 20 | 2.2 | 6.9 | 17.7 | 1010.0 | 15.6 | 15.6 |
| B-2 | 1.17 | A | 65.0 | 0.45 | 0.59 | 85 | 0.2 | 18.7 | 430 | 0.9 | 20 | 1.9 | 3.9 | 22.6 | 515.0 | 12.9 | 12.9 |
| B-3 | 0.46 | A | 65.0 | 0.45 | 0.59 | 15 | 2.0 | 3.7 | 190 | 1.0 | 20 | 2.0 | 1.6 | 5.2 | 205.0 | 11.1 | 5.2 |
| B-4 | 1.19 | A | 2.0 | 0.09 | 0.36 | 300 | 2.7 | 22.9 | 690 | 2.7 | 15 | 2.5 | 4.6 | 27.6 | 990.0 | 15.5 | 15.5 |
| B-5 | 1.56 | A | 2.0 | 0.09 | 0.36 | 200 | 2.7 | 18.8 | 100 | 2.7 | 15 | 2.5 | 0.7 | 19.5 | 300.0 | 11.7 | 11.7 |
| B-6 | 0.62 | A | 2.0 | 0.09 | 0.36 | 100 | 5.0 | 10.8 | 30 | 2.7 | 15 | 2.5 | 0.2 | 11.0 | 130.0 | 10.7 | 10.7 |
| C-1 | 1.35 | A | 58.2 | 0.42 | 0.57 | 35 | 2.4 | 5.5 | 400 | 2.4 | 20 | 3.1 | 2.2 | 7.7 | 435.0 | 12.4 | 7.7 |
| C-2 | 7.81 | A | 45.9 | 0.34 | 0.52 | 100 | 2.0 | 11.0 | 1770 | 1.5 | 20 | 2.4 | 12.0 | 23.1 | 1870.0 | 20.4 | 20.4 |
| C-3 | 2.38 | A | 56.9 | 0.40 | 0.56 | 100 | 1.6 | 11.0 | 810 | 1.0 | 20 | 2.0 | 6.8 | 17.7 | 910.0 | 15.1 | 15.1 |
| C-4 | 3.61 | A | 59.8 | 0.42 | 0.57 | 100 | 2.0 | 9.9 | 973 | 2.0 | 20 | 2.8 | 5.7 | 15.6 | 1073.0 | 16.0 | 15.6 |
| C-5 | 7.86 | A | 60.8 | 0.42 | 0.57 | 100 | 2.0 | 9.9 | 1200 | 1.3 | 20 | 2.2 | 8.9 | 18.8 | 1300.0 | 17.2 | 17.2 |
| C-6 | 5.54 | A | 52.7 | 0.38 | 0.55 | 100 | 3.0 | 9.1 | 1230 | 1.5 | 20 | 2.4 | 8.4 | 17.5 | 1330.0 | 17.4 | 17.4 |
| C-7 | 0.76 | A | 2.0 | 0.09 | 0.36 | 80 | 2.5 | 12.2 | 150 | 2.0 | 15 | 2.1 | 1.2 | 13.4 | 230.0 | 11.3 | 11.3 |
| C-8 | 0.92 | A | 2.0 | 0.09 | 0.36 | 100 | 2.5 | 13.6 | 170 | 2.5 | 15 | 2.4 | 1.2 | 14.8 | 270.0 | 11.5 | 11.5 |
| D-1 | 12.85 | A | 42.6 | 0.32 | 0.51 | 100 | 1.0 | 14.3 | 1180 | 2.0 | 20 | 2.8 | 7.0 | 21.2 | 1280.0 | 17.1 | 17.1 |
| D-2 | 3.19 | A | 48.7 | 0.36 | 0.53 | 100 | 1.0 | 13.5 | 1000 | 2.0 | 20 | 2.8 | 5.9 | 19.4 | 1100.0 | 16.1 | 16.1 |
| D-3 | 9.16 | A | 39.2 | 0.30 | 0.50 | 90 | 1.5 | 12.1 | 1020 | 1.5 | 20 | 2.4 | 6.9 | 19.1 | 1110.0 | 16.2 | 16.2 |
| D-4 | 9.53 | A | 29.0 | 0.24 | 0.47 | 100 | 1.5 | 13.8 | 1700 | 1.5 | 20 | 2.4 | 11.6 | 25.3 | 1800.0 | 20.0 | 20.0 |
| E-1 | 1.69 | A | 62.3 | 0.55 | 0.69 | 25 | 2.0 | 4.0 | 940 | 1.0 | 20 | 2.0 | 7.8 | 11.8 | 965.0 | 15.4 | 11.8 |
| E-2 | 0.68 | A | 82.8 | 0.76 | 0.85 | 25 | 2.0 | 2.5 | 665 | 1.6 | 20 | 2.5 | 4.4 | 6.9 | 690.0 | 13.8 | 6.9 |
| E-3 | 0.78 | A | 88.7 | 0.81 | 0.89 | 25 | 2.0 | 2.1 | 632 | 1.0 | 20 | 2.0 | 5.3 | 7.4 | 657.0 | 13.7 | 7.4 |
| E-4 | 0.91 | A | 80.6 | 0.74 | 0.84 | 25 | 2.0 | 2.6 | 913 | 2.0 | 20 | 2.8 | 5.4 | 8.0 | 938.0 | 15.2 | 8.0 |
| E-5 | 0.89 | A | 89.0 | 0.81 | 0.89 | 25 | 2.0 | 2.1 | 903 | 2.1 | 20 | 2.9 | 5.2 | 7.3 | 928.0 | 15.2 | 7.3 |
| F-1 | 0.46 | A | 38.7 | 0.29 | 0.50 | 66 | 2.5 | 8.9 | - | - | 15 | 10.4 | 0.1 | 9.0 | 66.0 | 10.4 | 9.0 |
| F-2 | 0.62 | A | 69.7 | 0.59 | 0.72 | 25 | 2.0 | 3.7 | 464 | 4.0 | 20 | 4.0 | 1.9 | 5.6 | 489.0 | 12.7 | 5.6 |
| G-1 | 0.98 | A | 2.0 | 0.09 | 0.36 | 100 | 3.5 | 12.2 | 109 | 3.5 | 15 | 2.8 | 0.6 | 12.8 | 209.0 | 11.2 | 11.2 |
| H-1 | 0.31 | A | 71.6 | 0.66 | 0.79 | 25 | 2.0 | 3.2 | 135 | 2.0 | 20 | 2.8 | 0.8 | 4.0 | 160.0 | 10.9 | 5.0 |
| OS-1 | 32.28 | A | 11.0 | 0.16 | 0.41 | 100 | 2.4 | 12.9 | 2100 | 2.2 | 15 | 2.2 | 15.7 | 28.6 | 2200.0 | 22.2 | 22.2 |
| OS-2 | 20.08 | A | 8.0 | 0.14 | 0.40 | 100 | 2.3 | 13.3 | 1400 | 2.3 | 15 | 2.3 | 10.3 | 23.6 | 1500.0 | 18.3 | 18.3 |
| OS-3 | 10.62 | A | 8.0 | 0.14 | 0.40 | 100 | 2.0 | 14.0 | 1500 | 2.0 | 15 | 2.1 | 11.8 | 25.7 | 1600.0 | 18.9 | 18.9 |
| OS-4 | 2.64 | A | 2.0 | 0.09 | 0.36 | 100 | 2.0 | 14.7 | 400 | 2.0 | 15 | 2.1 | 3.1 | 17.8 | 500.0 | 12.8 | 12.8 |
| OS-5 | 14.13 | A | 4.5 | 0.11 | 0.37 | 100 | 2.5 | 13.4 | 1600 | 3.0 | 15 | 2.6 | 10.3 | 23.6 | 1700.0 | 19.4 | 19.4 |
| OS-6 | 5.38 | A | 65.0 | 0.45 | 0.59 | 100 | 2.0 | 9.4 | 600 | 2.0 | 15 | 2.1 | 4.7 | 14.2 | 700.0 | 13.9 | 13.9 |

NOTES:

$T_i = (0.395 * (1.1 - C_s) * (L)^{0.5}) / ((S)^{0.33})$, S in ft/ft

$T_j = L / 60V$ (Velocity From Fig. 501)

Velocity $V = C_v * S^{0.5}$, S in ft/ft

$T_c \text{ Check} = 10 + L / 180$

For Urbanized basins a minimum T_i of 5.0 minutes is required.

For non-urbanized basins a minimum T_i of 10.0 minutes is required

STANDARD FORM SF-3: PROPOSED
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)

Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs
Design Storm: 100-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|----------|-----------|---------|--------------|----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|--|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | | OS-1 | 32.28 | 0.41 | 22.2 | 13.23 | 4.92 | 65.1 | | | | | | | | | | | | | |
| | 1 | A-1 | 2.70 | 0.52 | 13.6 | 1.40 | 6.16 | 8.6 | | | | | 1.0 | 8.6 | | | | 160 | 2.0 | 1.3 | Total flow on North side of Niebrara Drive |
| | 2 | A-2 | 1.19 | 0.51 | 10.5 | 0.61 | 6.82 | 4.2 | | | | | | | | | | | | | |
| | 2 | | | | | | | | 14.9 | 2.01 | 5.92 | 11.9 | 1.5 | 11.9 | | | | 290 | 2.4 | 2.0 | Total flow at DP-2 |
| | 3 | A-3 | 1.57 | 0.53 | 14.2 | 0.83 | 6.05 | 5.0 | | | | | 1.4 | 15.9 | | | | 60 | 2.4 | 0.4 | Total flow at NE corner of Bent Grass M.D. & Berwyn Ct. |
| | 4 | A-4 | 2.24 | 0.53 | 12.8 | 1.19 | 6.31 | 7.5 | | | | | 1.0 | 22.4 | | | | 840 | 2.0 | 7.0 | Total flow at NW corner of Bent Grass M.D. & Berwyn Ct. Total flow entering Bent Grass M.D. from Berwyn Ct. |
| | 5 | D-2 | 3.19 | 0.53 | 16.1 | 1.69 | 5.73 | 9.7 | | | | | | | | | | | | | Total flow at DP-5 |
| | 6 | D-1 | 12.85 | 0.51 | 17.1 | 6.55 | 5.58 | 36.5 | | | | | | | | | | | | | Total flow at DP-6 |
| | 5&6 | | | | | | | | 17.1 | 8.24 | 5.58 | 46.0 | | | | | | | | | Q at each inlet = 23 cfs |
| | 5 | | | | | | | | 17.1 | 4.12 | 5.58 | 23.0 | 1.1 | 8.1 | 14.9 | | | 60 | 2.1 | 0.5 | Future total flow by-passing inlet = 8.1 cfs Future total flow captured by inlet = 14.9 cfs |
| | 6 | | | | | | | | 17.1 | 4.12 | 5.58 | 23.0 | 1.0 | 4.4 | 18.6 | | | | | | Future total flow by-passing inlet = 4.4 cfs Future total flow captured by inlet = 18.6 cfs |
| | 6 | | | | | | | | 17.6 | 2.24 | 5.51 | 12.3 | 1 | 12.3 | | | | 430 | 2.0 | 3.6 | Future total flow entering Bent Grass M.D. = 12.3 cfs // Routed to inlet at DP-8 |
| | 7 | E-3 | 0.78 | 0.89 | 7.4 | 0.69 | 7.70 | 5.3 | | | | | | | | | | | | | Total flow at DP-7 along South side of Bent Grass M.D. |
| | 8 | E-2 | 0.68 | 0.85 | 6.9 | 0.58 | 7.89 | 4.6 | | | | | | | | | | | | | |
| | 8-W | | | | | | | | 21.2 | 2.82 | 5.04 | 14.2 | | | | | | | | | Total flow approaching DP-8 from the West |
| | 8 | E-1 | 1.69 | 0.69 | 11.8 | 1.17 | 6.51 | 7.6 | | | | | | | | | | | | | |
| | 8-E | | | | | | | | 24.3 | 5.20 | 4.69 | 24.4 | | | | | | | | | Total flow approaching DP-8 from the East |
| | 8 | | | | | | | | 24.3 | 8.02 | 4.69 | 37.6 | | | | | | | | | Total flow at DP-8 along North side of Bent Grass M.D. |
| | 7&8 | | | | | | | | 24.3 | 8.71 | 4.69 | 40.8 | | | | | | | | | Total flow at DP-7 & Q at each inlet = 20.4 cfs |
| | 7 | | | | | | | | | | | | | 20.4 | | | | | | | Total flow captured by inlet = 20.4 cfs |
| | 7 | | | | | | | | | | | | | 20.4 | | | | | | | Total flow at DP-7 = 20.4 cfs // Piped to inlet at DP-8 |
| | 8 | | | | | | | | | | | | | 20.4 | | | | | | | Total flow captured by inlet = 20.4 cfs |
| | 8 | | | | | | | | 24.3 | 14.71 | 4.69 | 69.0 | | | 69.0 | | | | | | Total flow at DP-8 = 69 cfs // Piped to Water Quality Pond |

**STANDARD FORM SF-3: PROPOSED
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs
Design Storm: 100-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|------------------|-----------|---------|--------------|------------------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|--|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C* <i>A</i> (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C* <i>A</i> (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | 9 | B-3 | 0.46 | 0.59 | 5.2 | 0.27 | 8.56 | 2.3 | | | | | 2.5 | 2.3 | | | | 350 | 3.2 | 1.8 | Total flow at the west point of Silky Thread Rd. |
| | 10 | B-4 | 1.19 | 0.36 | 15.5 | 0.43 | 5.83 | 2.5 | | | | | | | | | | | | | Total flow at the south point of Moskell Court. |
| | 10 | | | | | | | | 15.5 | 0.70 | 5.83 | 4.1 | | | | | | | | | Total flow to temporary swale - directs flow to Water Quality Pond |
| | 11 | B-1 | 4.46 | 0.54 | 15.6 | 2.41 | 5.81 | 14.0 | | | | | | | | | | | | | Total flow on North side of Willmore Dr. |
| | 12 | B-2 | 1.17 | 0.59 | 12.9 | 0.69 | 6.30 | 4.3 | | | | | | | | | | | | | Total flow on South side of Willmore Dr. |
| | 13 | | | | | | | | 15.6 | 3.10 | 5.81 | 18.0 | 2.5 | 18.0 | | | | 200 | 3.2 | 1.1 | Total flow going West off of Willmore Dr. into temporary swale |
| | 14 | B-5 | 1.56 | 0.36 | 11.7 | 0.56 | 6.54 | 3.7 | | | | | | | | | | | | | Total flow sheet flowing from Basin B-4 to temporary swale |
| | 14 | | | | | | | | 16.7 | 4.36 | 5.65 | 24.6 | | | | | | | | | Total flow entering proposed Water Quality Pond from north |
| | 15 | B-6 | 0.62 | 0.36 | 10.7 | 0.22 | 6.76 | 1.5 | | | | | | | | | | | | | Flows directly into proposed Water Quality Pond |
| | 15 | | | | | | | | 24.3 | 19.29 | 4.69 | 90.5 | | | | | | | | | Total flow entering proposed Water Quality Pond |
| | 16 | C-5 | 7.86 | 0.57 | 17.2 | 4.48 | 5.56 | 24.9 | | | | | 1.0 | 9.4 | | | | 150 | 2.0 | 1.3 | Total flow by-passing inlet = 9.4 cfs Total flow at DP-16 = 15.5 cfs // Piped to inlet at DP-17 |
| | 17 | C-6 | 5.54 | 0.55 | 17.4 | 3.05 | 5.54 | 16.9 | | | | | 1 | 7.7 | | | | 150 | 2.0 | 1.3 | Total flow by-passing inlet = 7.7 cfs Total flow captured by inlet = 9.2 cfs |
| | 17 | | | | | | | | 17.4 | 4.45 | 5.54 | 24.6 | | | 24.6 | | | | | | Total flow at DP-17 = 24.6 cfs // Piped to manhole at DP-19A |
| | 18 | C-4 | 3.61 | 0.57 | 15.6 | 2.06 | 5.81 | 12.0 | | | | | | | | | | | | | |
| | 18 | | | | | | | | 18.5 | 3.75 | 5.39 | 20.2 | | | | | | | | | Total flow approaching DP-18 from the NW |
| | 18 | C-3 | 2.38 | 0.56 | 15.1 | 1.33 | 5.90 | 7.8 | | | | | | | | | | | | | Total flow approaching DP-18 from the SE |
| | 18 | | | | | | | | 18.5 | 5.08 | 5.39 | 27.4 | | | 27.4 | | | | | | Total flow at DP-18 = 27.4 cfs // Piped to inlet at DP-19 |
| | 19 | C-1 | 1.35 | 0.57 | 7.7 | 0.77 | 7.59 | 5.8 | | | | | 1.5 | 5.8 | | | | 1400 | 2.4 | 9.5 | |
| | 19 | C-2 | 7.81 | 0.52 | 20.4 | 4.06 | 5.14 | 20.9 | | | | | | | | | | | | | |
| | 19 | | | | | | | | 20.4 | 4.83 | 5.14 | 24.8 | | | | | | | | | Total flow approaching DP-19 from the SE |
| | 19 | | | | | | | | 20.4 | 6.22 | 5.14 | 32.0 | | | 32.0 | | | | | | Total flow captured by inlet = 32 cfs |
| | 19A | | | | | | | | 20.4 | 15.75 | 5.14 | 81.0 | | | 81.0 | | | | | | Total flow at DP-19 = 81 cfs // Piped to Water Quality Pond |
| | 20 | C-7 | 0.76 | 0.36 | 11.3 | 0.27 | 6.63 | 1.8 | | | | | | | | | | | | | Flows directly into Water Quality Pond |
| | 20 | | | | | | | | 20.4 | 16.02 | 5.14 | 82.3 | | | 82.3 | | | | | | Total flow to Water Quality Pond |

**STANDARD FORM SF-3: PROPOSED
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs
Design Storm: 100-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|----------|-----------|---------|--------------|----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|---|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | 21 | D-3 | 9.16 | 0.50 | 16.2 | 4.58 | 5.72 | 26.2 | | | | | | | | | | | | | Total flow at DP-21 |
| | 22 | OS-2 | 20.08 | 0.40 | 18.3 | 8.03 | 5.41 | 43.4 | | | | | 1.5 | 43.4 | | | | 1800 | 2.4 | 12.2 | |
| | 22 | D-4 | 9.53 | 0.47 | 20.0 | 4.48 | 5.19 | 23.3 | | | | | | | | | | | | | |
| | 22 | | | | | | | | 30.6 | 12.51 | 4.12 | 51.5 | | | | | | | | | Total flow at DP-22 |
| | 21&22 | | | | | | | | 30.6 | 17.09 | 4.12 | 70.4 | | | | | | | | | Total flow at DP-21&22 Q at each inlet = 35.2 cfs |
| | 21 | | | | | | | | 30.6 | 8.55 | 4.12 | 35.2 | 1.25 | 12.1 | 23.1 | | | 60 | 2.2 | 0.4 | Total flow by-passing inlet = 12.1 cfs Total flow at DP-21 = 23.1 cfs // Piped to inlet at DP-22 |
| | 22 | | | | | | | | 30.6 | 8.55 | 4.12 | 35.2 | | 12.1 | 23.1 | | | | | | Total flow by-passing inlet = 12.1 cfs Total flow captured by inlet = 23.1 cfs |
| | 22 | | | | | | | | 31.0 | 5.88 | 4.08 | 24.0 | 2.5 | 24.0 | | | | 550 | 3.2 | 2.9 | Total flow entering Bent Grass M.D. from DP-21&22 |
| | 22 | | | | | | | | 30.6 | 11.21 | 4.12 | 46.2 | | | 46.2 | | | | | | Total flow at DP-22 = 46.2 cfs // Piped to inlet at DP-23 |
| | 23 | OS-3 | 10.62 | 0.40 | 18.9 | 4.25 | 5.33 | 22.7 | | | | | 2 | 22.7 | | | | 470 | 2.8 | 2.8 | |
| | 23 | | | | | | | | 21.7 | 4.25 | 4.99 | 21.2 | | | 21.2 | | | | | | Total flow captured by area inlet = 21.2 cfs |
| | 23A | | | | | | | | 30.6 | 15.46 | 4.12 | 63.7 | | | 63.7 | 2.0 | | 600 | 2.8 | 3.5 | Total flow at DP-23A = 63.7 cfs // Piped under Bent Grass M.D. into swale |
| | 24 | E-4 | 0.91 | 0.84 | 8.0 | 0.76 | 7.50 | 5.7 | | | | | | | | | | | | | |
| | 24 | OS-4 | 2.64 | 0.36 | 12.8 | 0.95 | 6.31 | 6.0 | | | | | | | | | | | | | |
| | 24 | | | | | | | | 31.0 | 7.59 | 4.08 | 31.0 | | | | | | | | | Total flow at DP-24 |
| | 25 | E-5 | 0.89 | 0.89 | 7.3 | 0.79 | 7.73 | 6.1 | | | | | | | | | | | | | Total flow at DP-25 |
| | 24&25 | | | | | | | | 31.0 | 8.38 | 4.08 | 34.2 | 0.1 | | 17.0 | | | | | | Total flow at DP-24&25 Q at each inlet = 17.1 cfs |
| | 24 | | | | | | | | 31.0 | 4.19 | 4.08 | 17.1 | 0.1 | | 17.0 | | | | | | Total flow by-passing inlet = 0.1 cfs Total flow at DP-24 = 17 cfs // Piped to inlet at DP-25 |
| | 25 | | | | | | | | 31.0 | 4.19 | 4.08 | 17.1 | 0.1 | | 17.0 | | | | | | Total flow by-passing inlet = 0.1 cfs Total flow captured by inlet = 17 cfs |
| | 25 | | | | | | | | 31.0 | 8.33 | 4.08 | 34.0 | | | 34.0 | | | | | | Total flow at DP-25 = 34 cfs // Piped to outfall at DP-26 |
| | 26 | | | | | | | | 34.1 | 23.80 | 3.84 | 91.4 | | | 91.4 | | | | | | Total flow at DP-26 = 91.4 cfs // Routed to RWT204 |
| | | C-8 | 0.92 | 0.36 | 11.5 | 0.33 | 6.58 | 2.2 | | | | | | | | | | | | | Pervious/landscape - Flows into RWT204 |
| | | F-1 | 0.46 | 0.50 | 9.0 | 0.23 | 7.20 | 1.7 | | | | | | | | | | | | | Flows offsite |
| | | F-2 | 0.62 | 0.72 | 5.6 | 0.45 | 8.38 | 3.8 | | | | | | | | | | | | | Flows offsite |
| | | G-1 | 0.98 | 0.36 | 11.2 | 0.35 | 6.66 | 2.3 | | | | | | | | | | | | | Flows offsite |
| | | H-1 | 0.31 | 0.79 | 5.0 | 0.24 | 8.68 | 2.1 | | | | | | | | | | | | | Flows offsite |
| | | OS-5 | 14.13 | 0.37 | 19.4 | 5.23 | 5.26 | 27.5 | | | | | | | | | | | | | Flows into Basin OS-6 |
| | | OS-6 | 5.38 | 0.59 | 13.9 | 3.17 | 6.10 | 19.3 | | | | | | | | | | | | | To be developed in the future |

**STANDARD FORM SF-3: PROPOSED
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs
Design Storm: 5-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|----------|-----------|---------|--------------|----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|---|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C*A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | | OS-1 | 32.28 | 0.16 | 22.2 | 5.16 | 2.93 | 15.1 | | | | | | | | | | | | | Swale conveys flow to future drainage tract |
| | 1 | A-1 | 2.70 | 0.33 | 13.6 | 0.89 | 3.67 | 3.3 | | | | | 1 | 3.3 | | | | 160 | 2.0 | 1.3 | Total flow on North side of Niebrara Drive |
| | 2 | A-2 | 1.19 | 0.32 | 10.5 | 0.38 | 4.06 | 1.5 | | | | | | | | | | | | | |
| | 2 | | | | | | | | 14.9 | 1.27 | 3.53 | 4.5 | 1.5 | 4.5 | | | | 290 | 2.4 | 2.0 | Total flow at DP-2 |
| | 3 | A-3 | 1.57 | 0.36 | 14.2 | 0.57 | 3.61 | 2.1 | | | | | 1.4 | 6.1 | | | | 60 | 2.4 | 0.4 | Total flow at NE corner of Bent Grass M.D. & Berwyn Ct. |
| | 3 | | | | | | | | 16.9 | 1.84 | 3.34 | 6.1 | | | | | | | | | |
| | 4 | A-4 | 2.24 | 0.34 | 12.8 | 0.76 | 3.76 | 2.9 | | | | | | | | | | | | | Total flow at NW corner of Bent Grass M.D. & Berwyn Ct. |
| | 4 | | | | | | | | 17.3 | 2.60 | 3.30 | 8.6 | 1.0 | 8.6 | | | | 840 | 2.0 | 7.0 | Total flow entering Bent Grass M.D. from Berwyn Ct. |
| | 5 | D-2 | 3.19 | 0.36 | 16.1 | 1.15 | 3.41 | 3.9 | | | | | | | 3.9 | | | | | | Future total flow captured by inlet = 3.9 cfs |
| | 6 | D-1 | 12.85 | 0.32 | 17.1 | 4.11 | 3.32 | 13.6 | | | | | 1.1 | 0.5 | | | | | | | Future total flow by-passing inlet = 0.5 cfs |
| | 6 | | | | | | | | | | | | | | 13.1 | | | | | | Future total flow captured by inlet = 13.1 cfs |
| | 6 | | | | | | | | 17.1 | 5.10 | 3.32 | 16.9 | | | | | | | | | Total flow piped to DP-8 |
| | 6 | | | | | | | | 17.1 | 0.16 | 3.32 | 0.5 | | 0.5 | | | | 430 | 2.0 | 3.6 | Future total flow entering Bent Grass M.D. = 0.5 cfs // Routed to inlet at DP-8 |
| | 7 | E-3 | 0.78 | 0.81 | 7.4 | 0.63 | 4.59 | 2.9 | | | | | | | 2.9 | | | | | | Total flow captured by inlet = 2.9 cfs |
| | 8 | E-2 | 0.68 | 0.76 | 6.9 | 0.52 | 4.70 | 2.4 | | | | | | | | | | | | | |
| | 8-W | | | | | | | | 17.1 | 0.68 | 3.32 | 2.3 | | | | | | | | | Total flow approaching DP-8 from the West |
| | 8 | E-1 | 1.69 | 0.55 | 11.8 | 0.93 | 3.88 | 3.6 | | | | | | | | | | | | | |
| | 8-E | | | | | | | | 24.3 | 3.53 | 2.79 | 9.8 | | | | | | | | | Total flow approaching DP-8 from the East |
| | 8 | | | | | | | | 24.3 | 4.21 | 2.79 | 11.8 | | | 11.8 | | | | | | Total flow captured by inlet = 11.8 cfs |
| | 8 | | | | | | | | 24.34 | 9.94 | 2.79 | 27.7 | | | 27.7 | | | | | | Total flow at DP-8 = 27.7 cfs // Piped to Water Quality Pond |

**STANDARD FORM SF-3: PROPOSED
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs
Design Storm: 5-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19

| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS |
|--------|--------------|---------------|-----------|---------------|----------|-----------|-----------|---------|--------------|-----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|---|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C* A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C* A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | |
| | 9 | B-3 | 0.46 | 0.45 | 5.2 | 0.21 | 5.10 | 1.1 | | | | | 2.5 | 1.1 | | | | 350 | 3.2 | 1.8 | Total flow at the west point of Silky Thread Rd. |
| | 10 | B-4 | 1.19 | 0.09 | 15.5 | 0.11 | 3.47 | 0.4 | | | | | | | | | | | | | Total flow at the south point of future Moskell Court. |
| | 10 | | | | | | | | 15.5 | 0.32 | 3.47 | 1.1 | | | | | | | | | Total flow to temporary swale - directs flow to Water Quality Pond |
| | 11 | B-1 | 4.46 | 0.36 | 15.6 | 1.61 | 3.46 | 5.6 | | | | | | | | | | | | | Total flow on North side of Willmore Dr. |
| | 12 | B-2 | 1.17 | 0.45 | 12.9 | 0.53 | 3.75 | 2.0 | | | | | | | | | | | | | Total flow on South side of Willmore Dr. |
| | 13 | | | | | | | | 15.6 | 2.14 | 3.46 | 7.4 | 2.5 | 7.4 | | | | 200 | 3.2 | 1.1 | Total flow going West off of Willmore Dr. into temporary swale |
| | 14 | B-5 | 1.56 | 0.09 | 11.7 | 0.14 | 3.90 | 0.5 | | | | | | | | | | | | | Total flow sheet flowing from Basin B-4 to temporary swale |
| | 14 | | | | | | | | 16.7 | 2.60 | 3.36 | 8.7 | | | | | | | | | Total flow entering proposed Water Quality Pond from north |
| | 15 | B-6 | 0.62 | 0.09 | 10.7 | 0.06 | 4.02 | 0.2 | | | | | | | | | | | | | Flows directly into proposed Water Quality Pond |
| | 15 | | | | | | | | 24.3 | 12.60 | 2.79 | 35.2 | | | | | | | | | Total flow entering proposed Water Quality Pond |
| | 16 | C-5 | 7.86 | 0.42 | 17.2 | 3.30 | 3.31 | 10.9 | | | | | 1.0 | 1.1 | | | | 150 | 2.0 | 1.3 | Total flow by-passing inlet = 1.1 cfs Total flow at DP-16 = 9.8 cfs // Piped to inlet at DP-17 |
| | 17 | C-6 | 5.54 | 0.38 | 17.4 | 2.11 | 3.30 | 7.0 | | | | | 1 | 1.2 | | | | 150 | 2.0 | 1.3 | Total flow by-passing inlet = 1.2 cfs Total flow captured by inlet = 5.8 cfs |
| | 17 | | | | | | | | 17.4 | 4.72 | 3.30 | 15.6 | | | 15.6 | | | | | | Total flow at DP-17 = 15.6 cfs // Piped to manhole at DP-19A |
| | 18 | C-4 | 3.61 | 0.42 | 15.6 | 1.52 | 3.46 | 5.3 | | | | | | | | | | | | | |
| | 18 | | | | | | | | 18.5 | 1.86 | 3.21 | 6.0 | | | | | | | | | Total flow approaching DP-18 from the NW |
| | 18 | C-3 | 2.38 | 0.40 | 15.1 | 0.95 | 3.52 | 3.3 | | | | | | | | | | | | | Total flow approaching DP-18 from the SE |
| | 18 | | | | | | | | 18.5 | 2.81 | 3.21 | 9.0 | | | 9.0 | | | | | | Total flow captured by inlet = 9 cfs Total flow at DP-18 = 9 cfs // Piped to inlet at DP-19 |
| | 19 | C-1 | 1.35 | 0.42 | 7.7 | 0.57 | 4.52 | 2.6 | | | | | 1.5 | 2.6 | | | | 1400 | 2.4 | 9.5 | |
| | 19 | C-2 | 7.81 | 0.34 | 20.4 | 2.66 | 3.06 | 8.1 | | | | | | | | | | | | | |
| | 19 | | | | | | | | 20.4 | 3.23 | 3.06 | 9.9 | | | | | | | | | Total flow approaching DP-19 from the SE |
| | 19 | | | | | | | | 20.4 | 3.58 | 3.06 | 11.0 | | | 11.0 | | | | | | Total flow captured by inlet = 11 cfs |
| | 19 | | | | | | | | 20.4 | 6.39 | 3.06 | 19.6 | | | 19.6 | | | | | | Total flow at DP-19 = 19.6 cfs // Piped to inlet at DP-19A |
| | 19A | | | | | | | | 20.4 | 11.11 | 3.06 | 34.0 | | | 34.0 | | | | | | Total flow at DP-19A = 34 cfs // Piped to Water Quality Pond |
| | 20 | C-7 | 0.76 | 0.09 | 11.3 | 0.07 | 3.95 | 0.3 | | | | | | | | | | | | | Flows directly into Water Quality Pond |
| | 20 | | | | | | | | 20.4 | 11.18 | 3.06 | 34.2 | | | 34.2 | | | | | | Total flow to Water Quality Pond |

STANDARD FORM SF-3: PROPOSED
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)


Subdivision: Bent Grass Residential Filing No. 2
Location: CO, Colorado Springs
Design Storm: 5-Year

Project Name: Bent Grass
Project No.: CLH000014.20
Calculated By: CMWJ
Checked By: SMB
Date: 10/18/19


| STREET | Design Point | DIRECT RUNOFF | | | | | | | TOTAL RUNOFF | | | | STREET | | PIPE | | | TRAVEL TIME | | | REMARKS | |
|--------|--------------|---------------|-----------|---------------|----------|-----------|-----------|---------|--------------|-----------|-----------|---------|-----------|-------------------|-------------------|-----------|--------------------|-------------|----------------|----------|---------|--|
| | | Basin ID | Area (Ac) | Runoff Coeff. | Tc (min) | C* A (Ac) | I (in/hr) | Q (cfs) | Tc (min) | C* A (Ac) | I (in/hr) | Q (cfs) | Slope (%) | Street Flow (cfs) | Design Flow (cfs) | Slope (%) | Pipe Size (inches) | Length (ft) | Velocity (fps) | Tt (min) | | |
| | 21 | D-3 | 9.16 | 0.30 | 16.2 | 2.75 | 3.41 | 9.4 | | | | | | | | | | | | | | Total flow at DP-21 = 9.4 cfs // Piped to future inlet at DP-22 |
| | 22 | OS-2 | 20.08 | 0.14 | 18.3 | 2.81 | 3.22 | 9.0 | | | | | | 1.5 | 9.0 | | | | 1800 | 2.4 | 12.2 | |
| | 22 | D-4 | 9.53 | 0.24 | 20.0 | 2.29 | 3.09 | 7.1 | | | | | | | | | | | | | | |
| | 22 | | | | | | | | 30.6 | 5.10 | 2.45 | 12.5 | | 0.2 | | 12.3 | | | | | | Total flow by-passing inlet = 0.2 cfs Total flow captured by inlet = 12.3 cfs |
| | 22 | | | | | | | | 30.6 | 7.77 | 2.45 | 19.0 | | | 19.0 | | | | | | | Total flow at DP-22 = 19 cfs // Piped to inlet at DP-23 |
| | 22 | | | | | | | | 30.6 | 0.08 | 2.45 | 0.2 | 2.5 | 0.2 | | | | 550 | 3.2 | 2.9 | | Total flow entering Bent Grass M.D. from DP-21&22 |
| | 23 | OS-3 | 10.62 | 0.14 | 18.9 | 1.49 | 3.18 | 4.7 | | | | | 2 | 4.7 | | | | 470 | 2.8 | 2.8 | | |
| | 23 | | | | | | | | 21.7 | 1.49 | 2.97 | 4.4 | | | 4.4 | | | | | | | Total flow captured by area inlet = 4.4 cfs |
| | 23A | | | | | | | | 30.6 | 9.26 | 2.45 | 22.7 | | | 22.7 | 2.0 | | 600 | 2.8 | 3.5 | | Total flow at DP-23A = 22.7 cfs // Piped under Bent Grass M.D. into swale |
| | 24 | E-4 | 0.91 | 0.74 | 8.0 | 0.67 | 4.46 | 3.0 | | | | | | | | | | | | | | |
| | 24 | OS-4 | 2.64 | 0.09 | 12.8 | 0.24 | 3.76 | 0.9 | | | | | 2.8 | 0.9 | | | | 150 | 3.3 | 0.7 | | |
| | 24 | | | | | | | | 33.5 | 0.99 | 2.32 | 2.3 | | | 2.3 | | | | | | | Total flow at DP-24 = 2.3 cfs // Piped to inlet at DP-25 |
| | 25 | E-5 | 0.89 | 0.81 | 7.3 | 0.72 | 4.60 | 3.3 | | | | | | | 3.3 | | | | | | | Total flow captured by inlet = 3.3 cfs |
| | 25 | | | | | | | | 33.5 | 1.71 | 2.32 | 4.0 | | | 4.0 | | | | | | | Total flow at DP-25 = 4 cfs // Piped to outfall at DP-26 |
| | 26 | | | | | | | | 33.5 | 10.97 | 2.32 | 25.5 | | | 25.5 | | | | | | | Total flow at DP-26 = 25.5 cfs // Routed to RWT204 |
| | | C-8 | 0.92 | 0.09 | 11.5 | 0.08 | 3.92 | 0.3 | | | | | | | 0.3 | | | | | | | Pervious/landscape - Flows into RWT204 |
| | | F-1 | 0.46 | 0.29 | 9.0 | 0.13 | 4.29 | 0.6 | | | | | | | 0.6 | | | | | | | Flows offsite |
| | | F-2 | 0.62 | 0.59 | 5.6 | 0.37 | 4.99 | 1.8 | | | | | | | 1.8 | | | | | | | Flows offsite |
| | | G-1 | 0.98 | 0.09 | 11.2 | 0.09 | 3.96 | 0.4 | | | | | | | 0.4 | | | | | | | Flows offsite |
| | | H-1 | 0.31 | 0.66 | 5.0 | 0.20 | 5.17 | 1.0 | | | | | | | 1.0 | | | | | | | Flows offsite |
| | | OS-5 | 14.13 | 0.11 | 19.4 | 1.55 | 3.13 | 4.9 | | | | | | | 4.9 | | | | | | | Flows into Basin OS-6 |
| | | OS-6 | 5.38 | 0.45 | 13.9 | 2.42 | 3.64 | 8.8 | | | | | | | 8.8 | | | | | | | To be developed in the future |

APPENDIX C
Hydraulic Computations


Storm - A

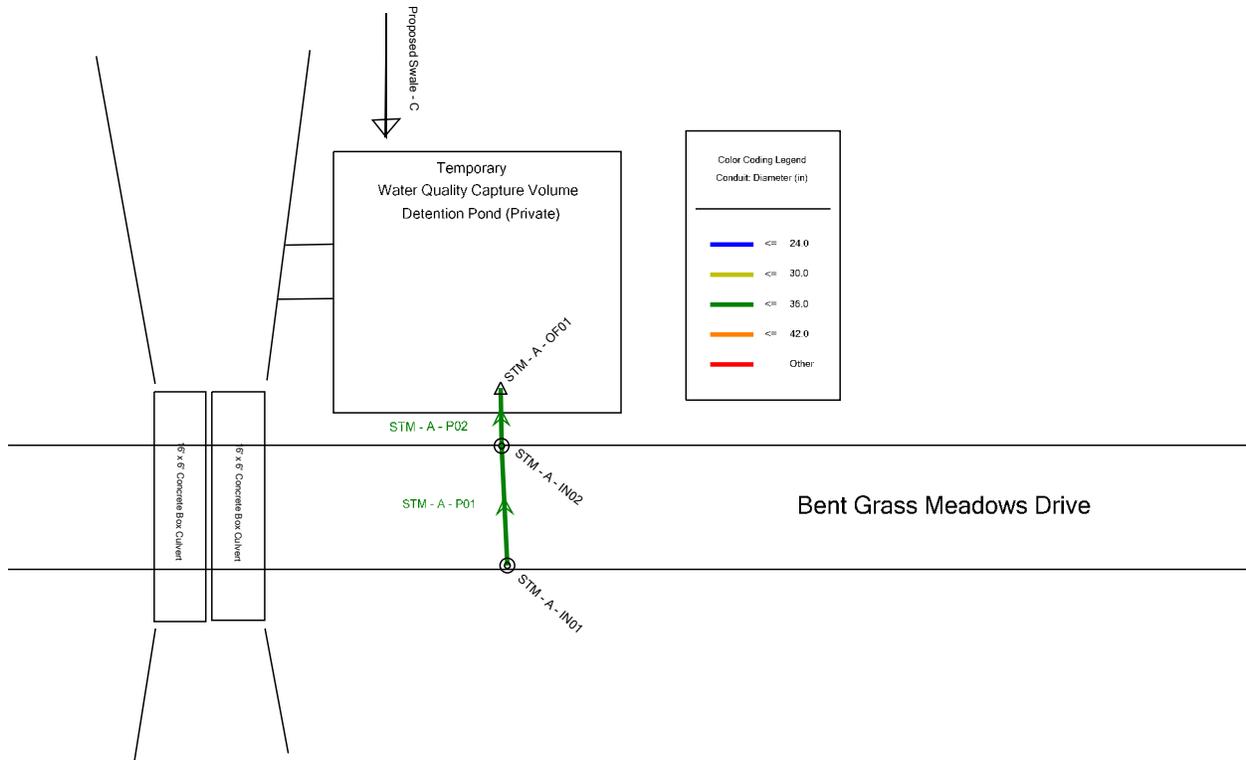


Storm - C & D

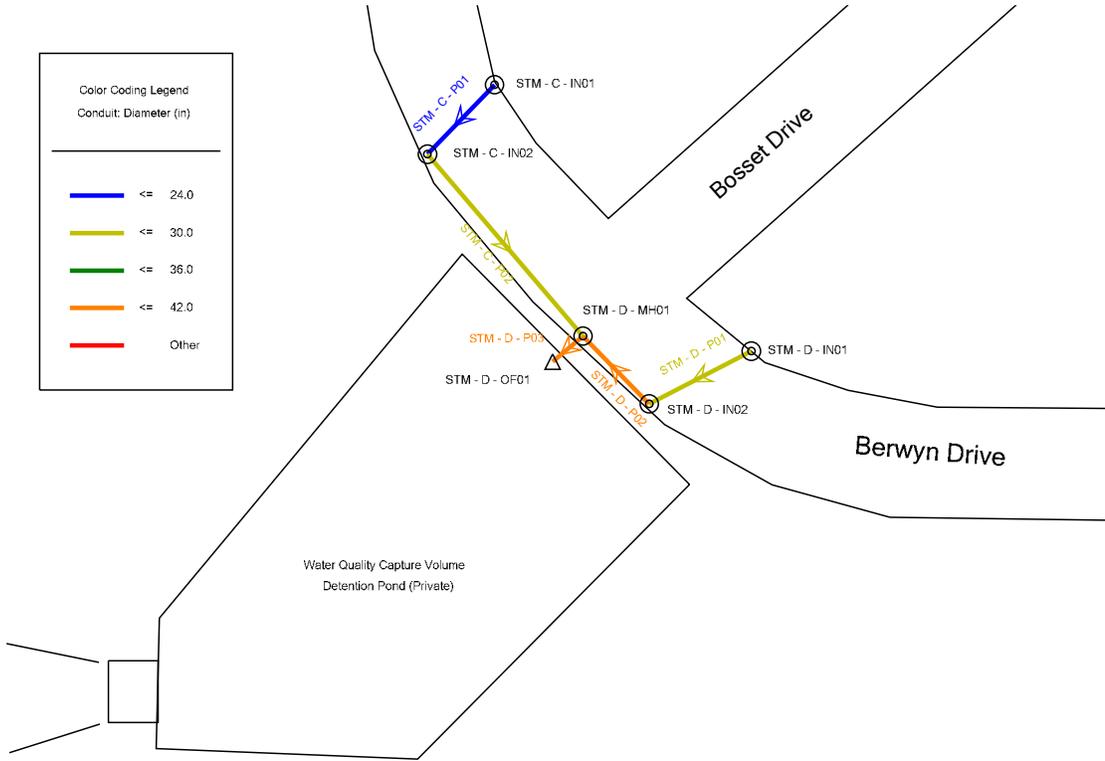

Storm - F

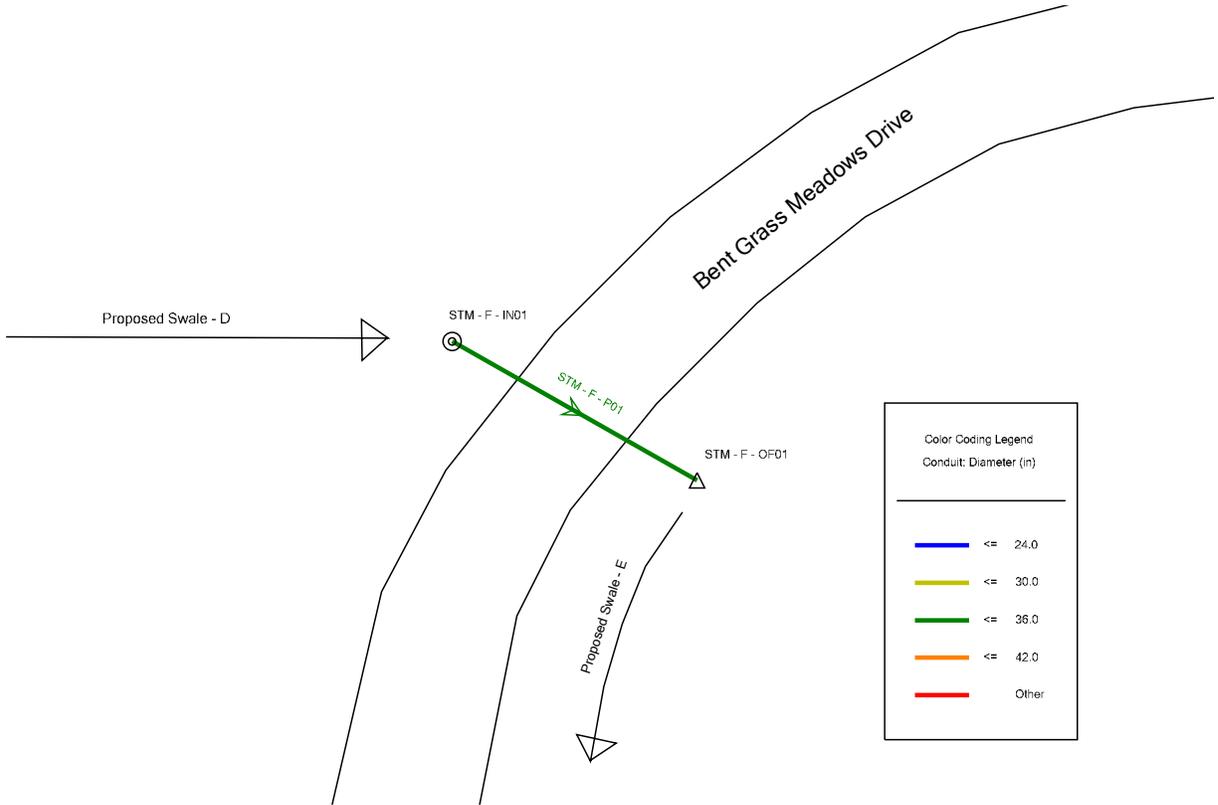

Storm - G

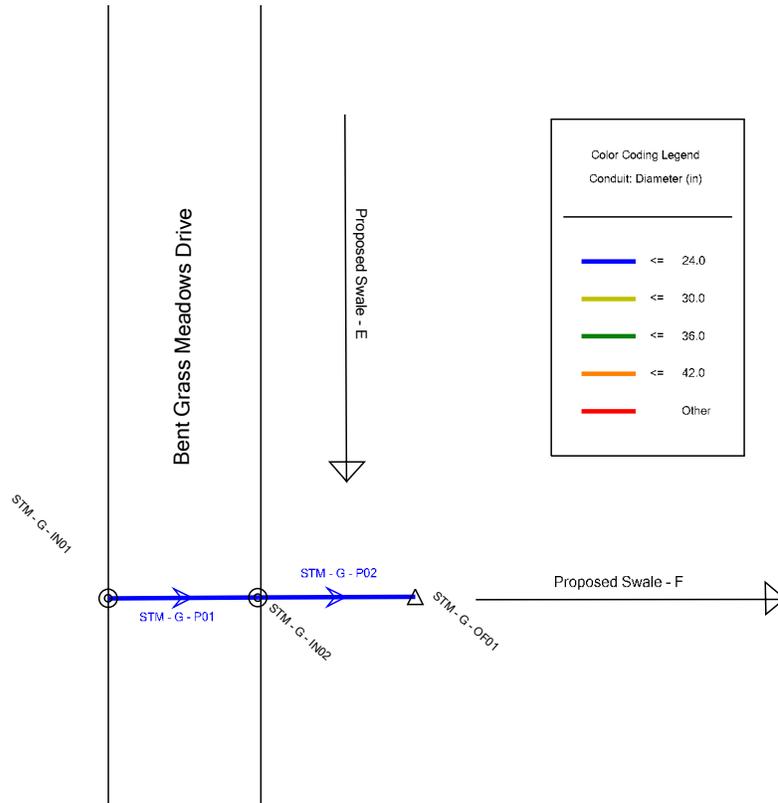

FlexTable: Conduit Table

Active Scenario: 5 YR

| Label | Start Node | Stop Node | Invert (Start) (ft) | Invert (Stop) (ft) | Length (User Defined) (ft) | Slope (Calculated) (ft/ft) | Diameter (in) | Manning's n | Flow (cfs) | Velocity (ft/s) | Capacity (Full Flow) (cfs) | Hydraulic Grade Line (In) (ft) | Hydraulic Grade Line (Out) (ft) | Energy Grade Line (In) (ft) | Energy Grade Line (Out) (ft) |
|---------------|----------------|----------------|---------------------|--------------------|----------------------------|----------------------------|---------------|-------------|------------|-----------------|----------------------------|--------------------------------|---------------------------------|-----------------------------|------------------------------|
| STM - A - P01 | STM - A - IN01 | STM - A - IN02 | 6,940.04 | 6,939.80 | 49.0 | 0.005 | 36.0 | 0.013 | 2.90 | 3.67 | 46.66 | 6,940.74 | 6,940.75 | 6,940.82 | 6,940.79 |
| STM - G - P01 | STM - G - IN01 | STM - G - IN02 | 6,931.91 | 6,931.67 | 49.0 | 0.005 | 24.0 | 0.013 | 2.40 | 3.64 | 15.83 | 6,933.43 | 6,933.42 | 6,933.44 | 6,933.43 |
| STM - G - P02 | STM - G - IN02 | STM - G - OF01 | 6,931.67 | 6,931.41 | 51.4 | 0.005 | 24.0 | 0.013 | 4.00 | 4.25 | 16.09 | 6,933.42 | 6,933.41 | 6,933.45 | 6,933.44 |
| STM - C - P01 | STM - C - IN01 | STM - C - IN02 | 6,926.43 | 6,926.25 | 36.2 | 0.005 | 24.0 | 0.013 | 9.80 | 5.33 | 15.94 | 6,928.42 | 6,928.35 | 6,928.57 | 6,928.50 |
| STM - D - P01 | STM - D - IN01 | STM - D - IN02 | 6,925.97 | 6,925.79 | 36.5 | 0.005 | 30.0 | 0.013 | 9.00 | 5.18 | 28.79 | 6,928.13 | 6,928.12 | 6,928.19 | 6,928.18 |
| STM - D - P03 | STM - D - MH01 | STM - D - OF01 | 6,924.32 | 6,924.25 | 13.2 | 0.005 | 42.0 | 0.013 | 34.00 | 7.47 | 73.29 | 6,927.76 | 6,927.75 | 6,927.96 | 6,927.94 |
| STM - A - P02 | STM - A - IN02 | STM - A - OF01 | 6,938.70 | 6,938.50 | 40.5 | 0.005 | 36.0 | 0.013 | 27.70 | 6.91 | 46.87 | 6,940.40 | 6,940.16 | 6,941.10 | 6,940.90 |
| STM - F - P01 | STM - F - IN01 | STM - F - OF01 | 6,934.42 | 6,933.64 | 155.0 | 0.005 | 36.0 | 0.013 | 22.70 | 6.62 | 47.31 | 6,935.95 | 6,935.10 | 6,936.56 | 6,935.79 |
| STM - C - P02 | STM - C - IN02 | STM - D - MH01 | 6,925.75 | 6,925.32 | 85.4 | 0.005 | 30.0 | 0.013 | 15.60 | 6.03 | 29.11 | 6,928.14 | 6,928.02 | 6,928.30 | 6,928.18 |
| STM - D - P02 | STM - D - IN02 | STM - D - MH01 | 6,924.79 | 6,924.62 | 34.1 | 0.005 | 42.0 | 0.013 | 19.60 | 6.31 | 71.06 | 6,928.03 | 6,928.02 | 6,928.10 | 6,928.09 |

FlexTable: Manhole Table
Active Scenario: 5 YR


| Label | Elevation (Rim) (ft) | Headloss Coefficient (Standard) | Headloss Method | Headloss (ft) | Hydraulic Grade Line (In) (ft) | Hydraulic Grade Line (Out) (ft) | Energy Grade Line (In) (ft) | Energy Grade Line (Out) (ft) |
|----------------|-------------------------|---------------------------------------|-----------------|------------------|--------------------------------------|---------------------------------------|-----------------------------------|------------------------------------|
| STM - A - IN01 | 6,945.10 | 0.500 | Standard | 0.04 | 6,940.78 | 6,940.74 | 6,940.86 | 6,940.82 |
| STM - A - IN02 | 6,945.10 | 0.500 | Standard | 0.35 | 6,940.75 | 6,940.40 | 6,940.79 | 6,941.10 |
| STM - G - IN02 | 6,937.01 | 0.050 | Standard | 0.00 | 6,933.42 | 6,933.42 | 6,933.43 | 6,933.45 |
| STM - G - IN01 | 6,937.01 | 1.320 | Standard | 0.02 | 6,933.44 | 6,933.43 | 6,933.46 | 6,933.44 |
| STM - C - IN02 | 6,932.39 | 1.320 | Standard | 0.21 | 6,928.35 | 6,928.14 | 6,928.50 | 6,928.30 |
| STM - C - IN01 | 6,932.52 | 0.000 | Standard | 0.00 | 6,928.42 | 6,928.42 | 6,928.57 | 6,928.57 |
| STM - D - IN01 | 6,931.23 | 0.000 | Standard | 0.00 | 6,928.13 | 6,928.13 | 6,928.19 | 6,928.19 |
| STM - D - IN02 | 6,931.21 | 1.320 | Standard | 0.09 | 6,928.12 | 6,928.03 | 6,928.18 | 6,928.10 |
| STM - F - IN01 | 6,945.20 | 0.000 | Standard | 0.00 | 6,935.95 | 6,935.95 | 6,936.56 | 6,936.56 |
| STM - D - MH01 | 6,930.74 | 1.320 | Standard | 0.26 | 6,928.02 | 6,927.76 | 6,928.09 | 6,927.96 |

FlexTable: Outfall Table


Active Scenario: 5 YR

| Label | Elevation (Ground) (ft) | Elevation (Invert) (ft) | Boundary Condition Type | Elevation (User Defined Tailwater) (ft) | Hydraulic Grade (ft) | Energy Grade Line (ft) | Flow (Total Out) (cfs) |
|----------------|-------------------------------|-------------------------------|----------------------------|--|-------------------------|------------------------------|---------------------------|
| STM - G - OF01 | 6,938.13 | 6,931.41 | Crown | | 6,933.41 | 6,933.41 | 4.00 |
| STM - D - OF01 | 6,923.50 | 6,919.81 | Crown | | 6,927.75 | 6,927.75 | 34.00 |
| STM - F - OF01 | 6,933.64 | 6,933.64 | Free Outfall | | 6,935.10 | 6,935.10 | 22.70 |
| STM - A - OF01 | 6,938.75 | 6,937.29 | Free Outfall | | 6,940.16 | 6,940.16 | 27.70 |

Storm - A - 5 YR

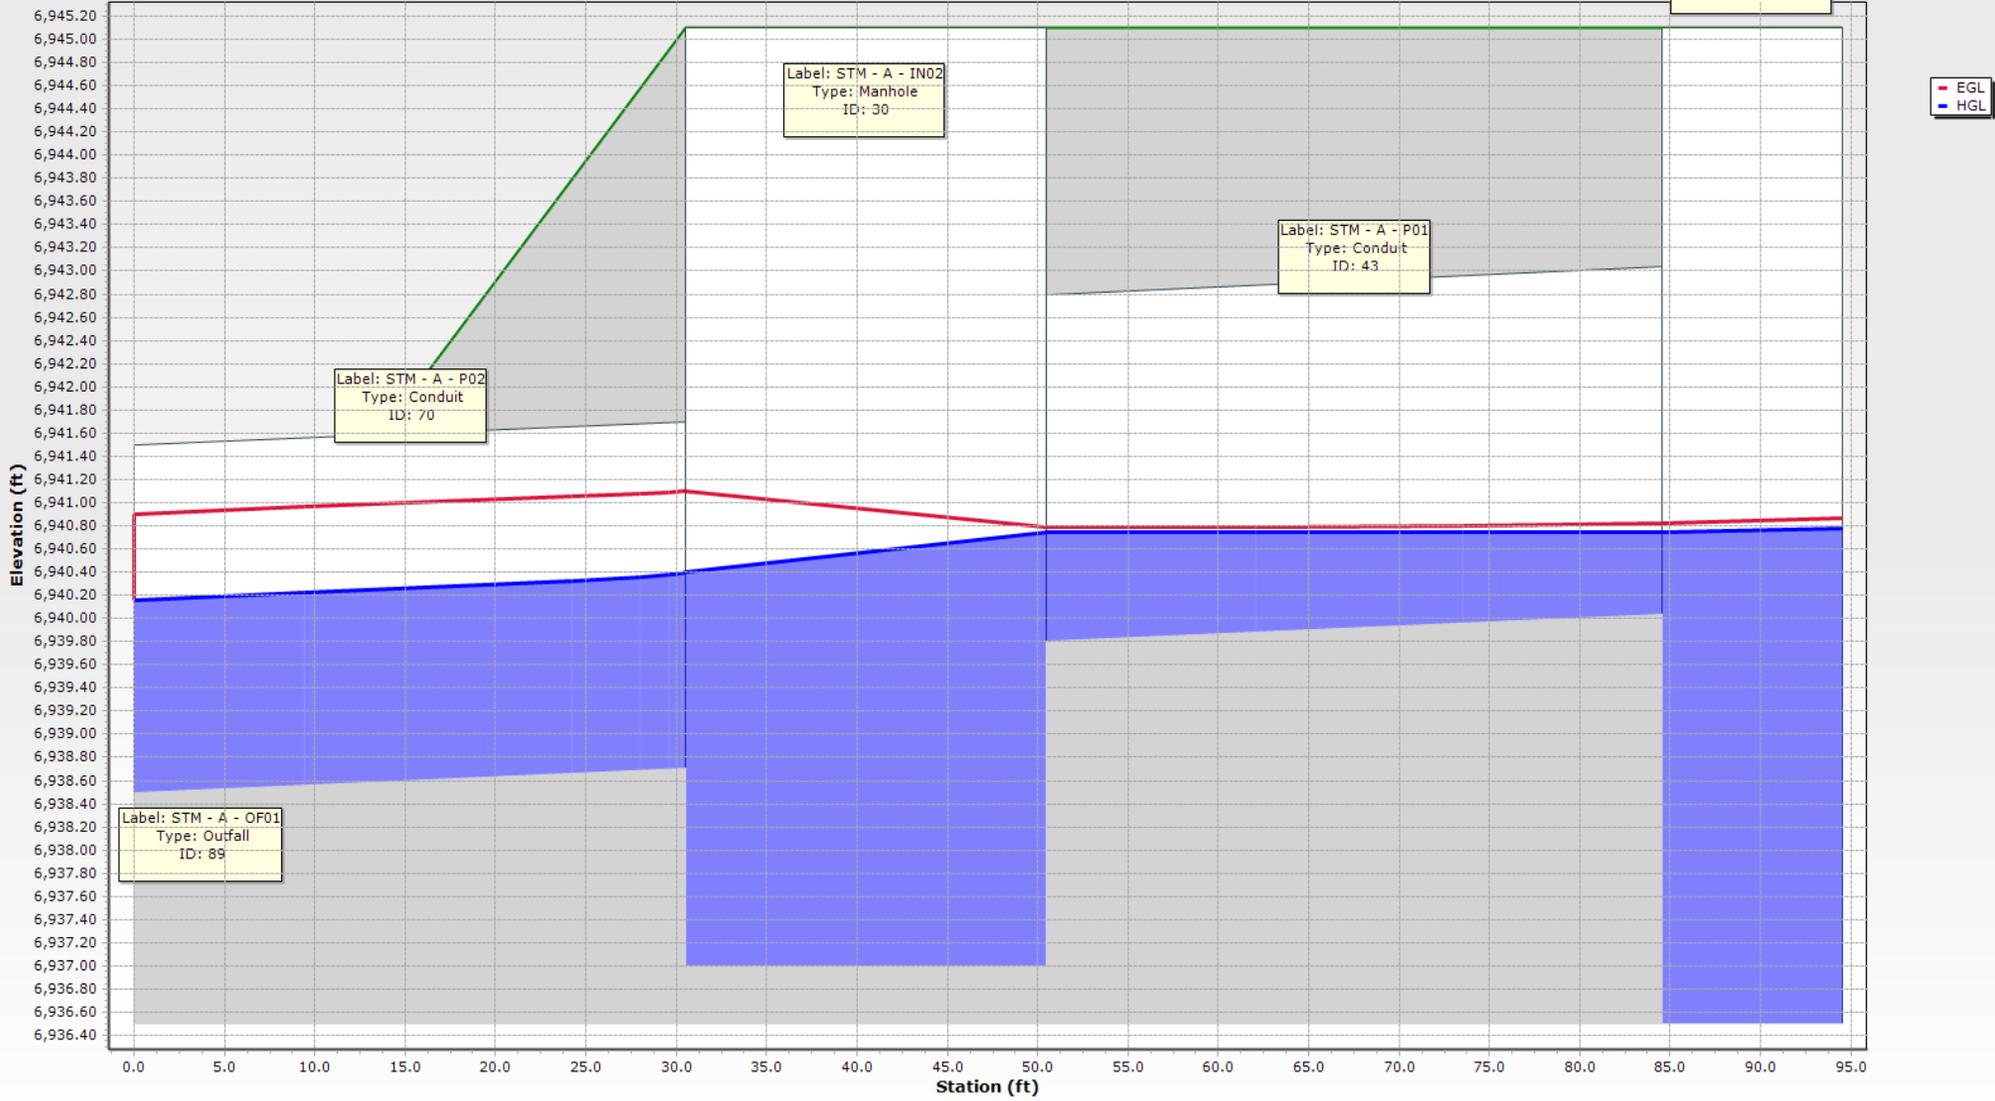

Storm - C - 5 YR

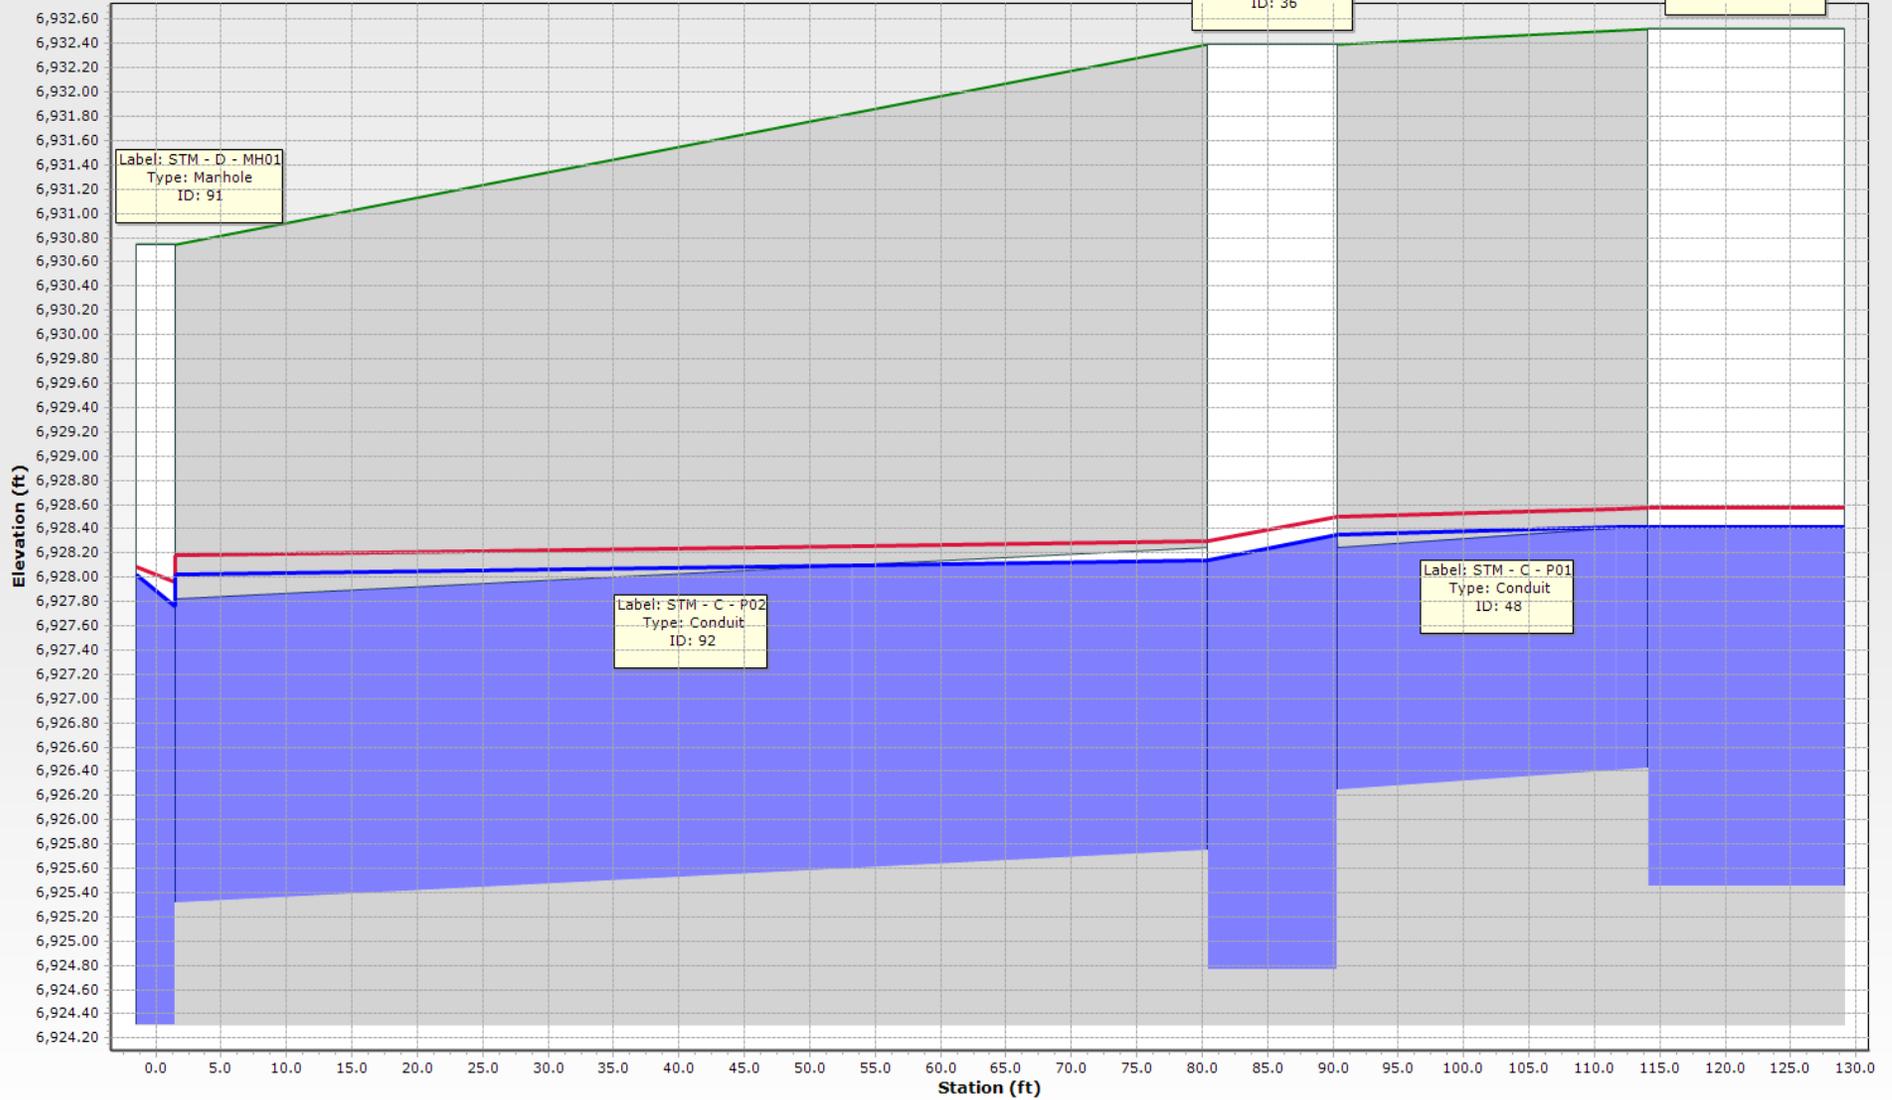

Label: STM - D - MH01
Type: Manhole
ID: 91

Label: STM - C - P02
Type: Conduit
ID: 92


Label: STM - C - IN02
Type: Manhole
ID: 36

Label: STM - C - IN01
Type: Manhole
ID: 37


Label: STM - C - P01
Type: Conduit
ID: 48

EGL
HGL


Storm - D - 5 YR

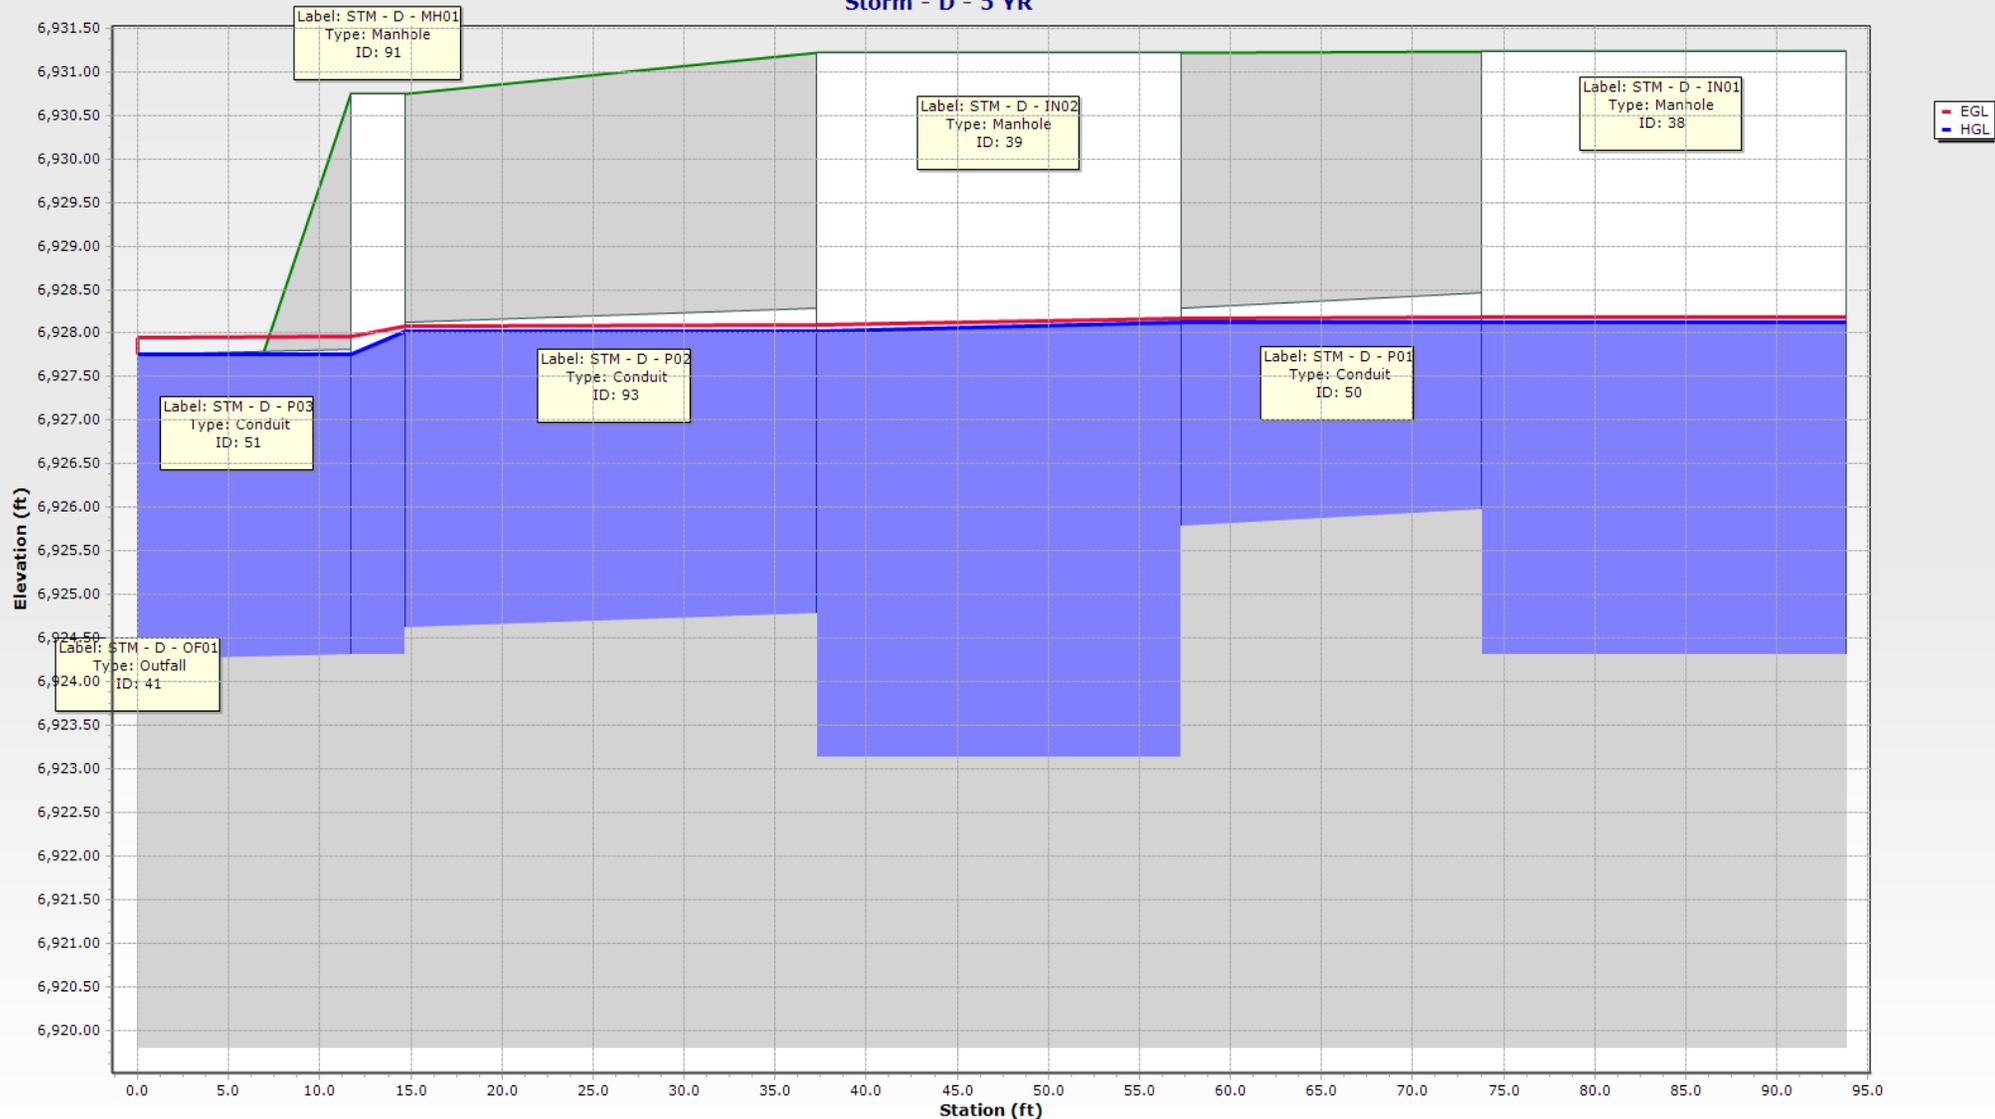

Storm - F - 5 YR

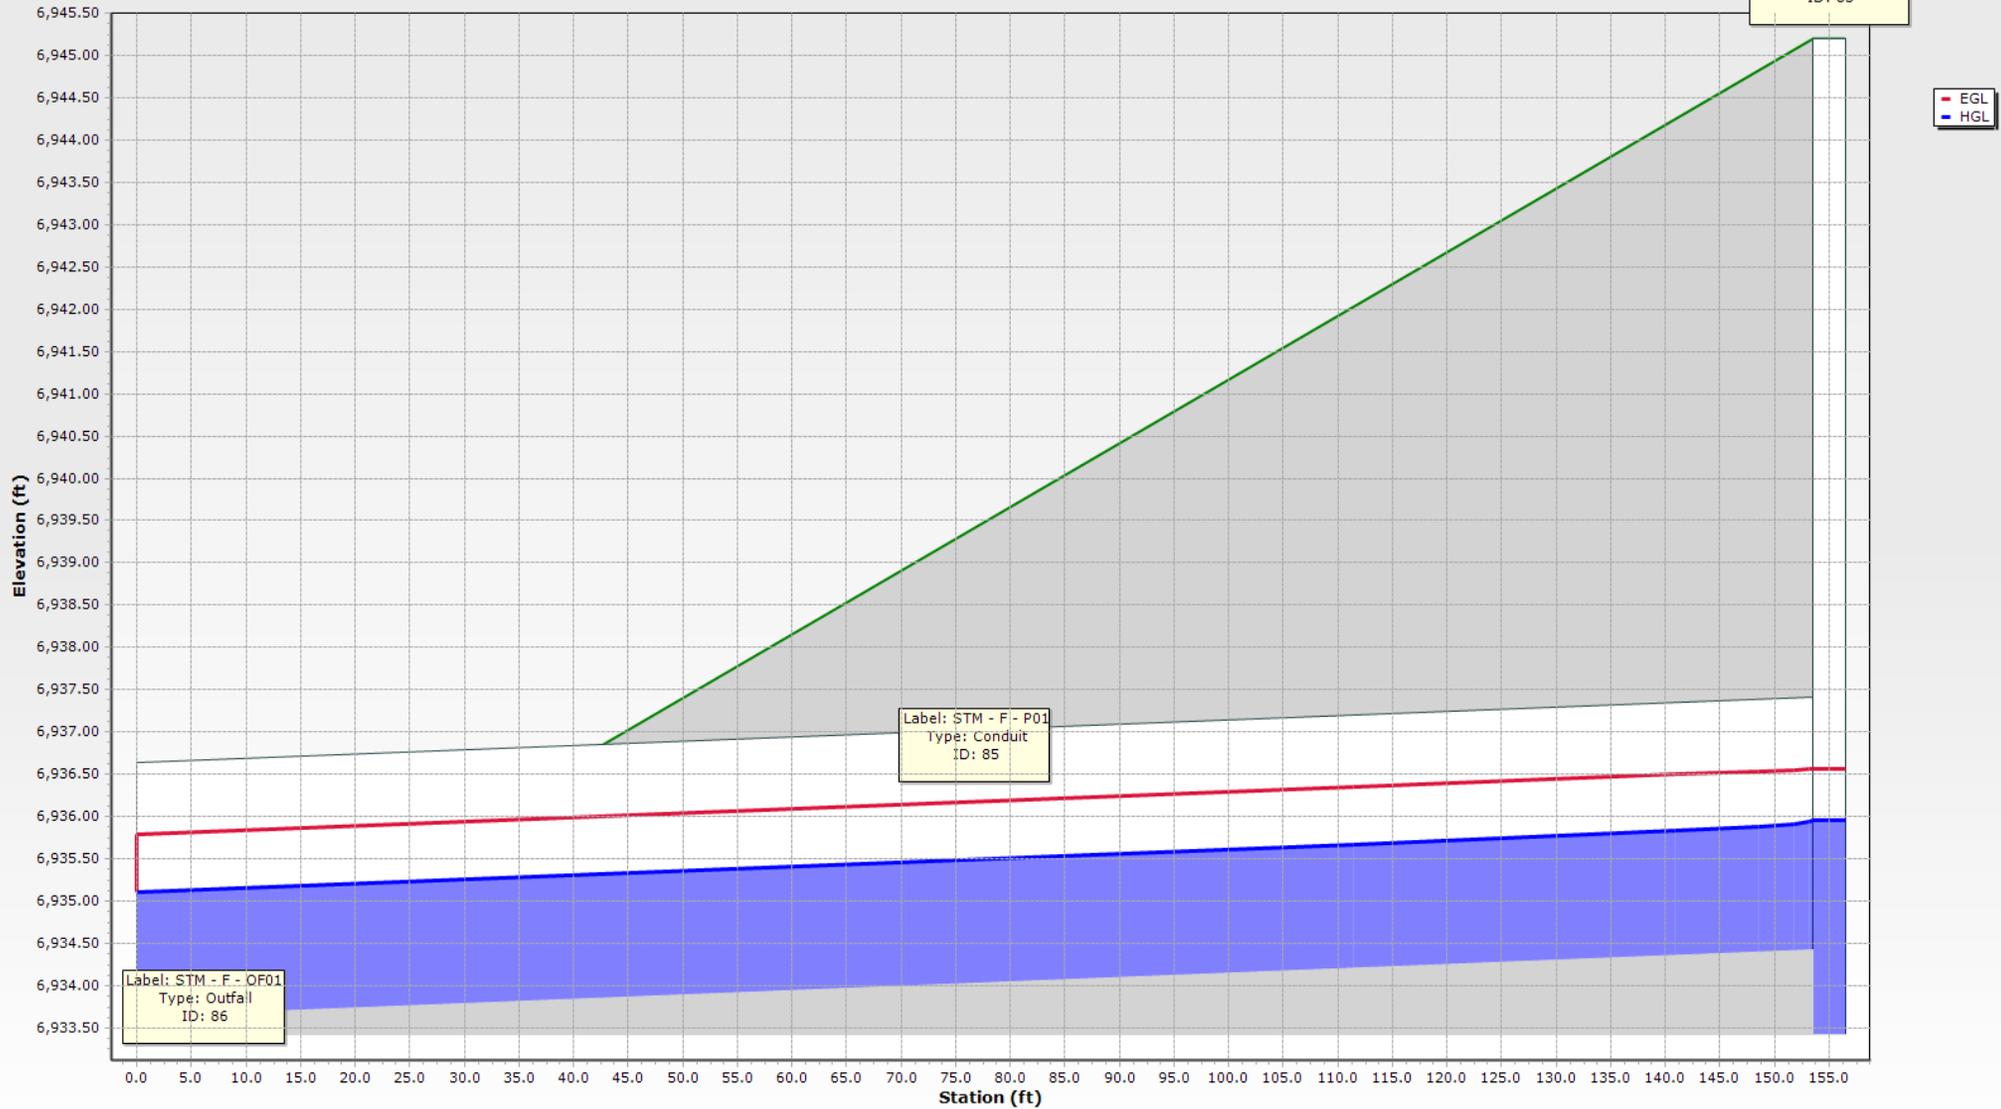

Storm - G - 5 YR

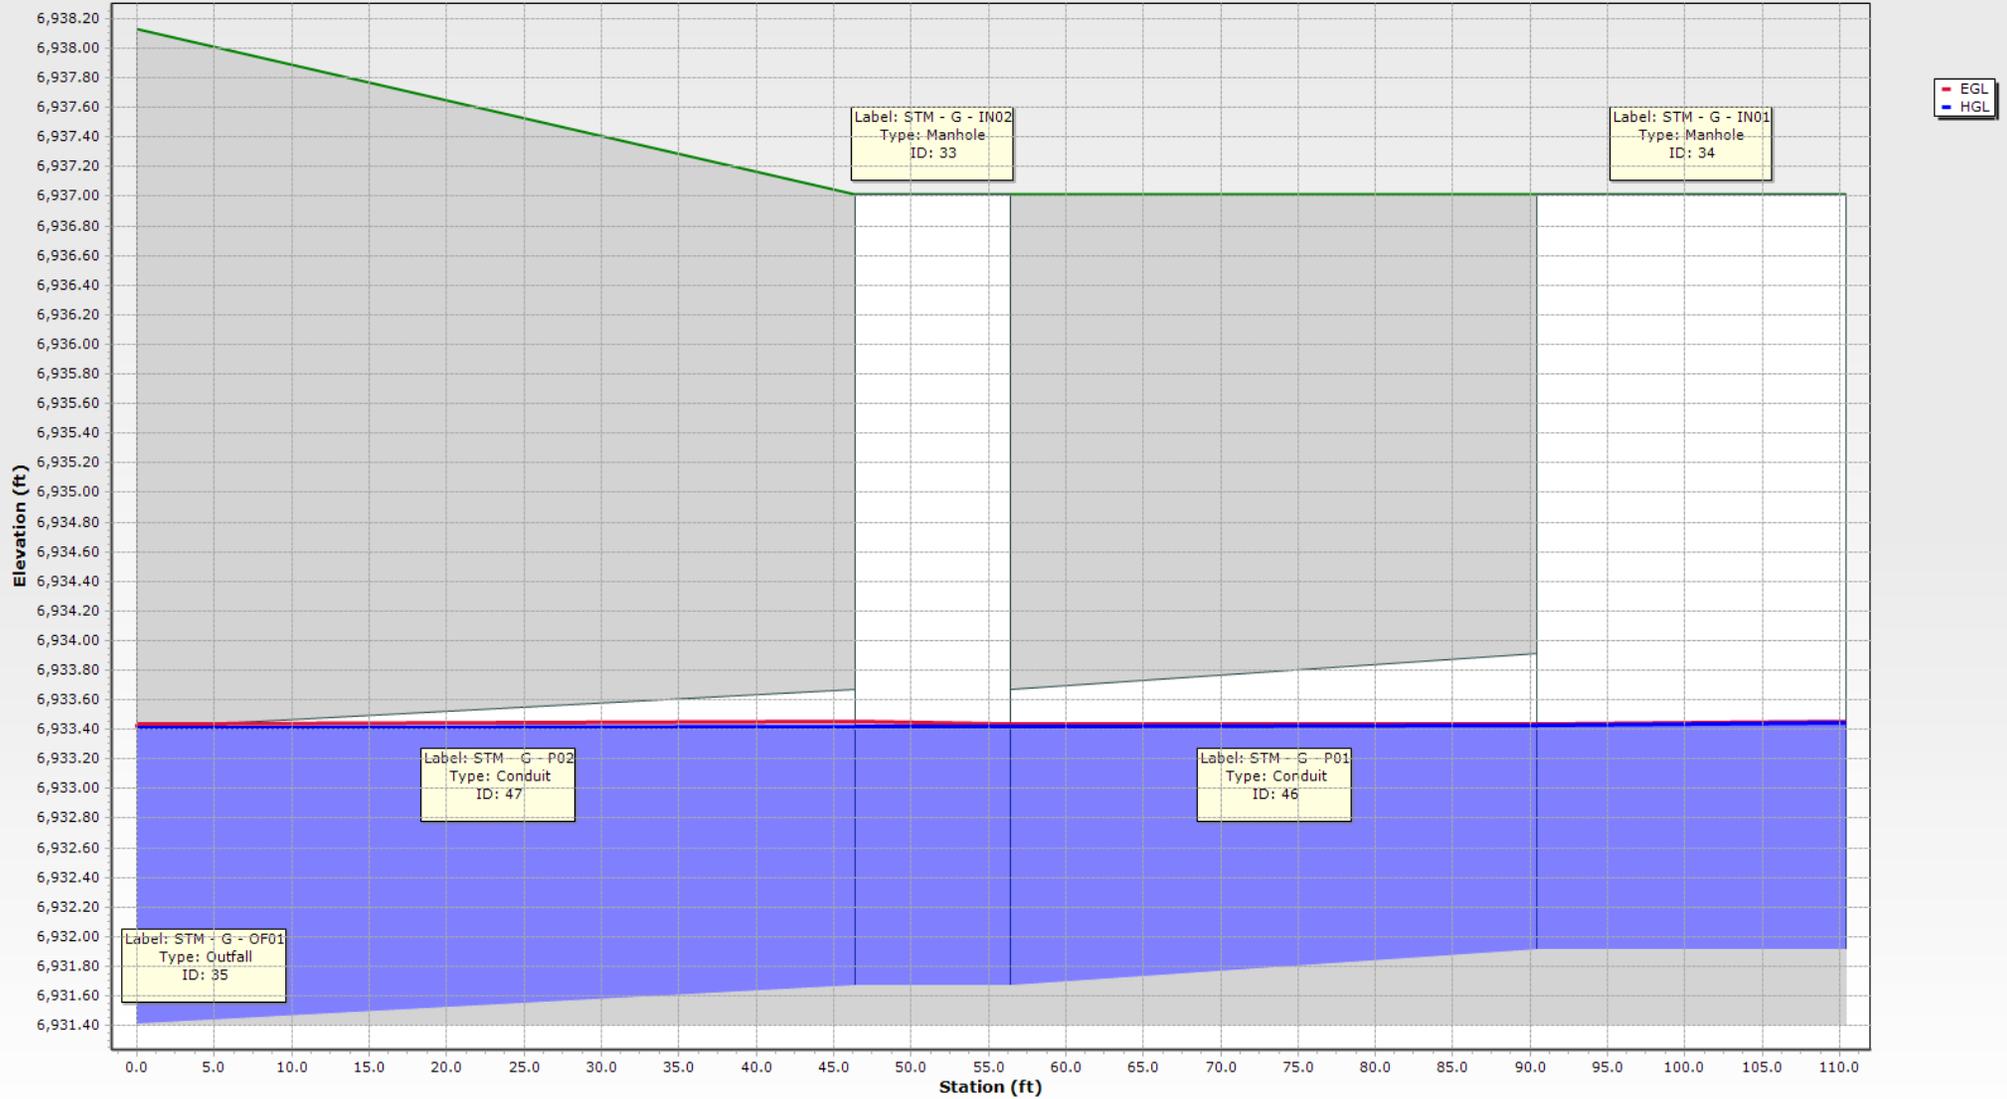

FlexTable: Conduit Table

Active Scenario: 100 YR

| Label | Start Node | Stop Node | Invert (Start) (ft) | Invert (Stop) (ft) | Length (User Defined) (ft) | Slope (Calculated) (ft/ft) | Diameter (in) | Manning's n | Flow (cfs) | Velocity (ft/s) | Capacity (Full Flow) (cfs) | Hydraulic Grade Line (In) (ft) | Hydraulic Grade Line (Out) (ft) | Energy Grade Line (In) (ft) | Energy Grade Line (Out) (ft) |
|---------------|----------------|----------------|---------------------|--------------------|----------------------------|----------------------------|---------------|-------------|------------|-----------------|----------------------------|--------------------------------|---------------------------------|-----------------------------|------------------------------|
| STM - A - P01 | STM - A - IN01 | STM - A - IN02 | 6,940.04 | 6,939.80 | 49.0 | 0.005 | 36.0 | 0.013 | 20.40 | 2.89 | 46.66 | 6,943.07 | 6,943.02 | 6,943.20 | 6,943.15 |
| STM - G - P01 | STM - G - IN01 | STM - G - IN02 | 6,931.91 | 6,931.67 | 49.0 | 0.005 | 24.0 | 0.013 | 17.00 | 5.41 | 15.83 | 6,934.94 | 6,934.66 | 6,935.39 | 6,935.12 |
| STM - G - P02 | STM - G - IN02 | STM - G - OF01 | 6,931.67 | 6,931.41 | 51.4 | 0.005 | 24.0 | 0.013 | 34.00 | 10.82 | 16.09 | 6,934.57 | 6,933.41 | 6,936.39 | 6,935.23 |
| STM - C - P01 | STM - C - IN01 | STM - C - IN02 | 6,926.43 | 6,926.25 | 36.2 | 0.005 | 24.0 | 0.013 | 15.50 | 4.93 | 15.94 | 6,930.06 | 6,929.89 | 6,930.44 | 6,930.27 |
| STM - D - P01 | STM - D - IN01 | STM - D - IN02 | 6,925.97 | 6,925.79 | 36.5 | 0.005 | 30.0 | 0.013 | 27.40 | 5.58 | 28.79 | 6,930.13 | 6,929.97 | 6,930.62 | 6,930.45 |
| STM - D - P03 | STM - D - MH01 | STM - D - OF01 | 6,924.32 | 6,924.25 | 13.2 | 0.005 | 42.0 | 0.013 | 81.00 | 8.42 | 73.29 | 6,927.27 | 6,927.06 | 6,928.63 | 6,928.55 |
| STM - A - P02 | STM - A - IN02 | STM - A - OF01 | 6,938.70 | 6,938.50 | 40.5 | 0.005 | 36.0 | 0.013 | 69.00 | 9.76 | 46.87 | 6,942.28 | 6,941.85 | 6,943.76 | 6,943.33 |
| STM - F - P01 | STM - F - IN01 | STM - F - OF01 | 6,934.42 | 6,933.64 | 155.0 | 0.005 | 36.0 | 0.013 | 63.70 | 9.01 | 47.31 | 6,938.05 | 6,936.64 | 6,939.32 | 6,937.90 |
| STM - C - P02 | STM - C - IN02 | STM - D - MH01 | 6,925.75 | 6,925.32 | 85.4 | 0.005 | 30.0 | 0.013 | 24.60 | 5.01 | 29.11 | 6,929.37 | 6,929.07 | 6,929.76 | 6,929.46 |
| STM - D - P02 | STM - D - IN02 | STM - D - MH01 | 6,924.79 | 6,924.62 | 34.1 | 0.005 | 42.0 | 0.013 | 59.40 | 6.17 | 71.06 | 6,929.19 | 6,929.07 | 6,929.78 | 6,929.66 |


FlexTable: Manhole Table
Active Scenario: 100 YR

| Label | Elevation (Rim) (ft) | Headloss Coefficient (Standard) | Headloss Method | Headloss (ft) | Hydraulic Grade Line (In) (ft) | Hydraulic Grade Line (Out) (ft) | Energy Grade Line (In) (ft) | Energy Grade Line (Out) (ft) |
|----------------|-------------------------|---------------------------------------|-----------------|------------------|--------------------------------------|---------------------------------------|-----------------------------------|------------------------------------|
| STM - A - IN01 | 6,945.10 | 0.500 | Standard | 0.06 | 6,943.13 | 6,943.07 | 6,943.26 | 6,943.20 |
| STM - A - IN02 | 6,945.10 | 0.500 | Standard | 0.74 | 6,943.02 | 6,942.28 | 6,943.15 | 6,943.76 |
| STM - G - IN02 | 6,937.01 | 0.050 | Standard | 0.09 | 6,934.66 | 6,934.57 | 6,935.12 | 6,936.39 |
| STM - G - IN01 | 6,937.01 | 1.320 | Standard | 0.60 | 6,935.54 | 6,934.94 | 6,935.99 | 6,935.39 |
| STM - C - IN02 | 6,932.39 | 1.320 | Standard | 0.52 | 6,929.89 | 6,929.37 | 6,930.27 | 6,929.76 |
| STM - C - IN01 | 6,932.52 | 0.000 | Standard | 0.00 | 6,930.06 | 6,930.06 | 6,930.44 | 6,930.44 |
| STM - D - IN01 | 6,931.23 | 0.000 | Standard | 0.00 | 6,930.13 | 6,930.13 | 6,930.62 | 6,930.62 |
| STM - D - IN02 | 6,931.21 | 1.320 | Standard | 0.78 | 6,929.97 | 6,929.19 | 6,930.45 | 6,929.78 |
| STM - F - IN01 | 6,945.20 | 0.000 | Standard | 0.00 | 6,938.05 | 6,938.05 | 6,939.32 | 6,939.32 |
| STM - D - MH01 | 6,930.74 | 1.320 | Standard | 1.79 | 6,929.07 | 6,927.27 | 6,929.66 | 6,928.63 |


FlexTable: Outfall Table
Active Scenario: 100 YR

| Label | Elevation (Ground) (ft) | Elevation (Invert) (ft) | Boundary Condition Type | Elevation (User Defined Tailwater) (ft) | Hydraulic Grade (ft) | Energy Grade Line (ft) | Flow (Total Out) (cfs) |
|----------------|-------------------------------|-------------------------------|----------------------------|--|-------------------------|------------------------------|---------------------------|
| STM - G - OF01 | 6,938.13 | 6,931.41 | Crown | | 6,933.41 | 6,933.41 | 34.00 |
| STM - D - OF01 | 6,923.50 | 6,919.81 | User Defined Tailwater | 6,926.68 | 6,927.06 | 6,927.06 | 81.00 |
| STM - F - OF01 | 6,933.64 | 6,933.64 | Crown | | 6,936.64 | 6,936.64 | 63.70 |
| STM - A - OF01 | 6,938.75 | 6,937.29 | User Defined Tailwater | 6,941.85 | 6,941.85 | 6,941.85 | 69.00 |

Storm - A - 100 YR

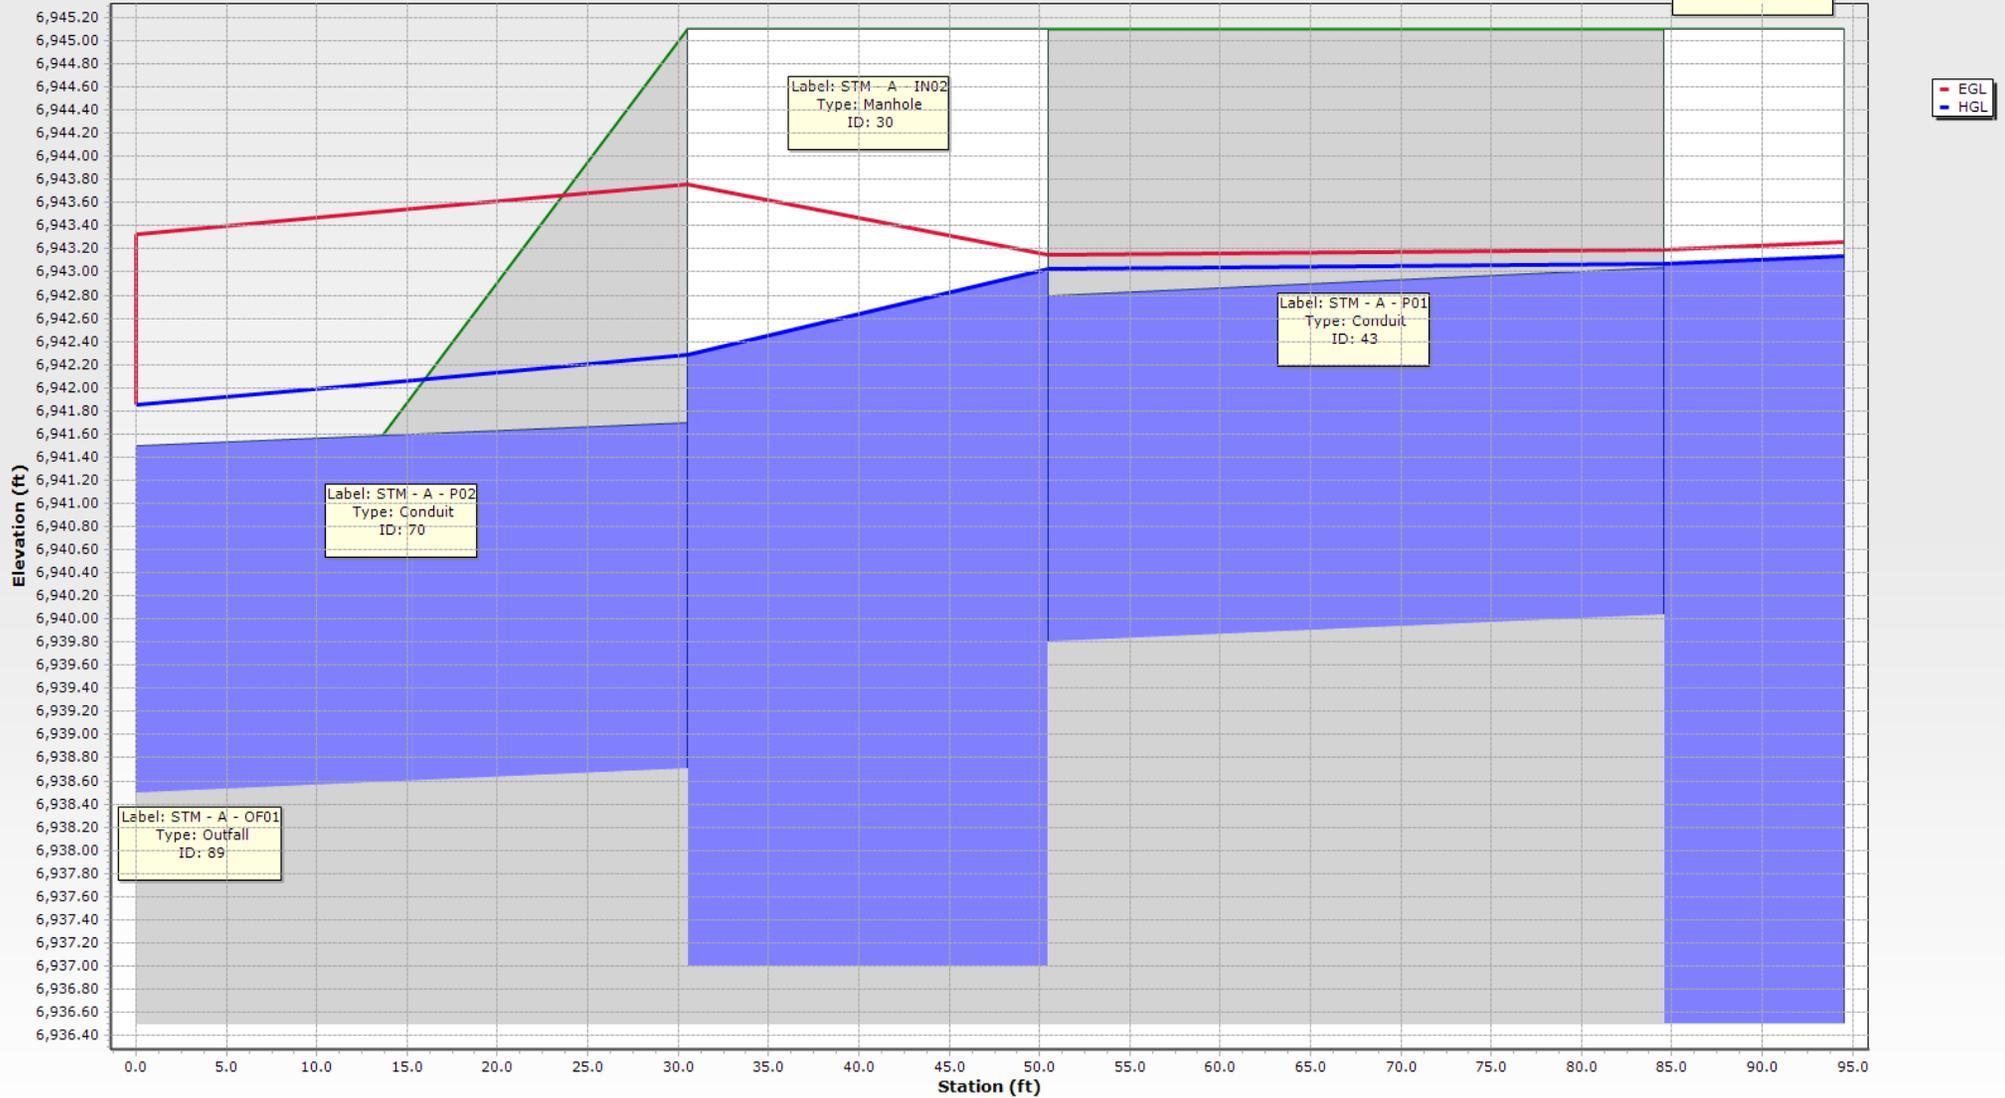


Storm - C - 100 YR

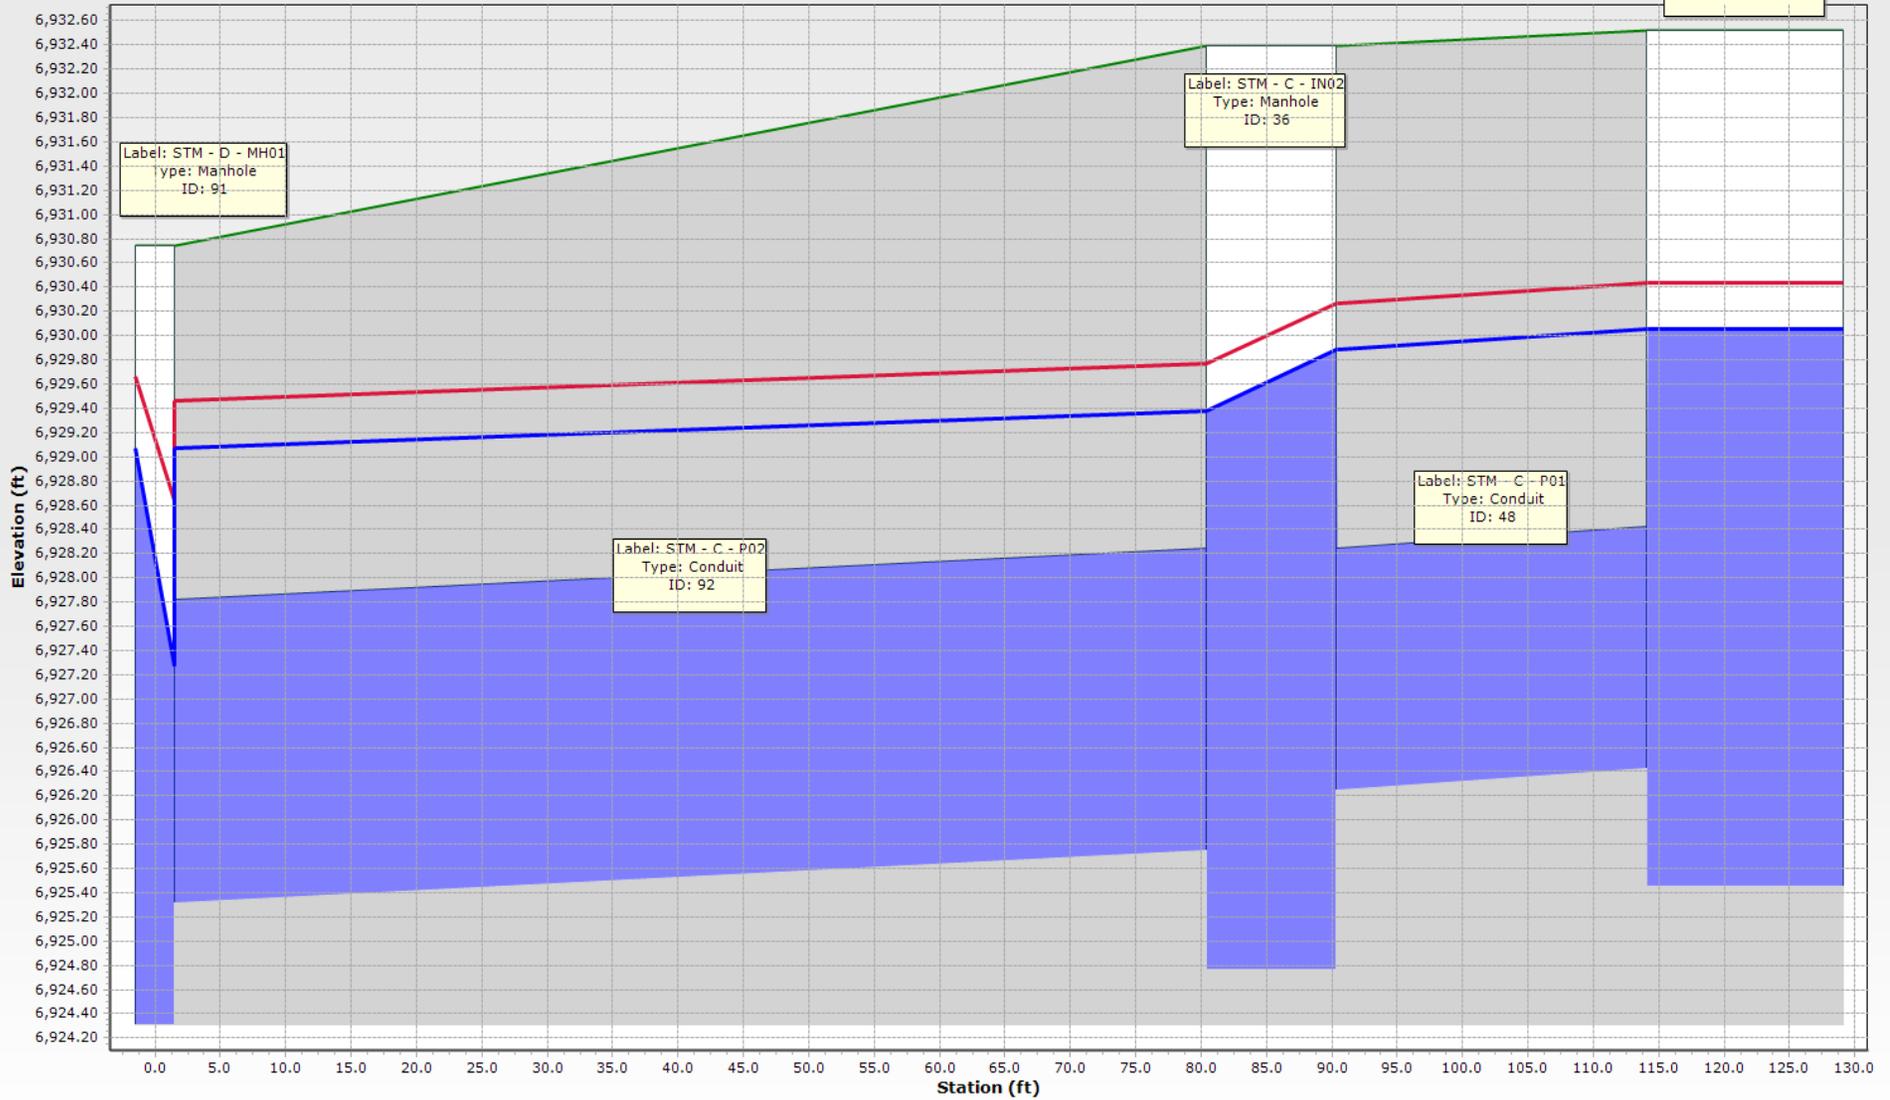


EGL
HGL


Storm - D - 100 YR

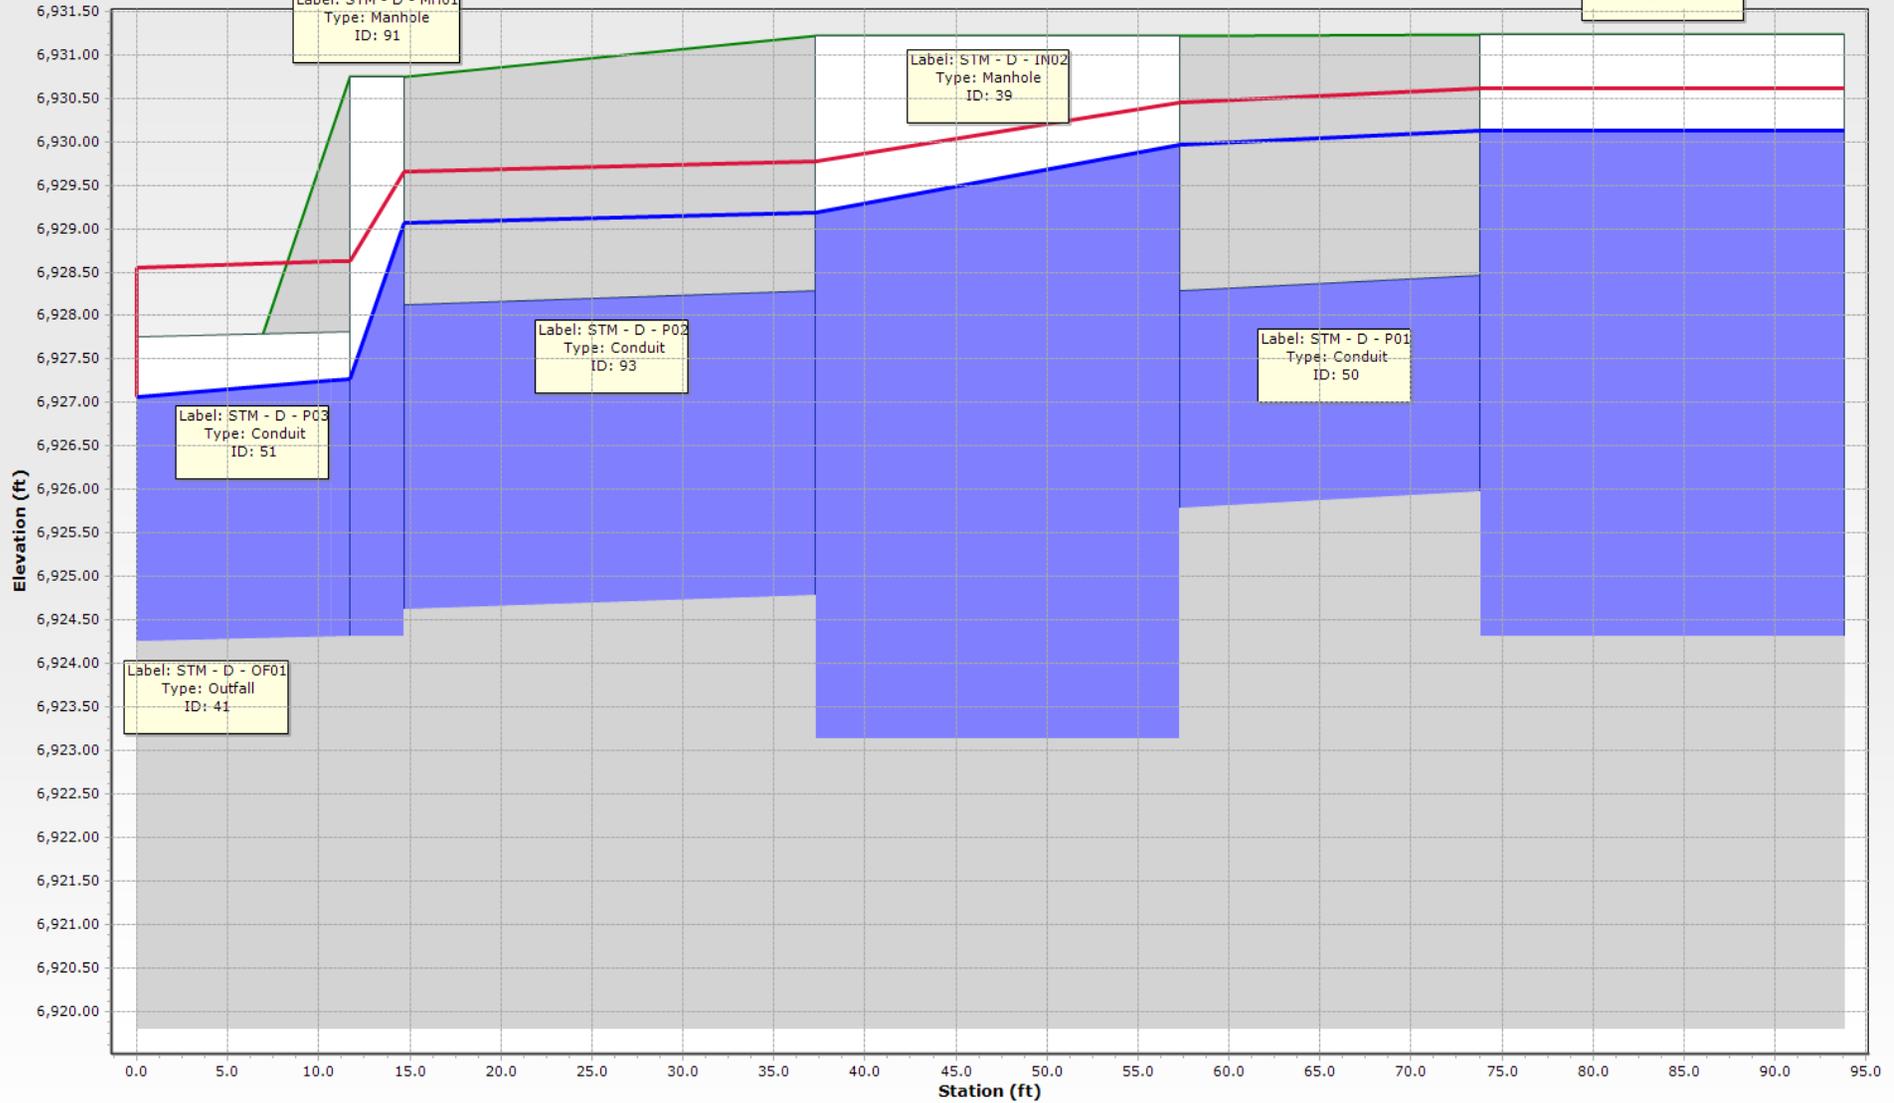

Storm - F - 100 YR

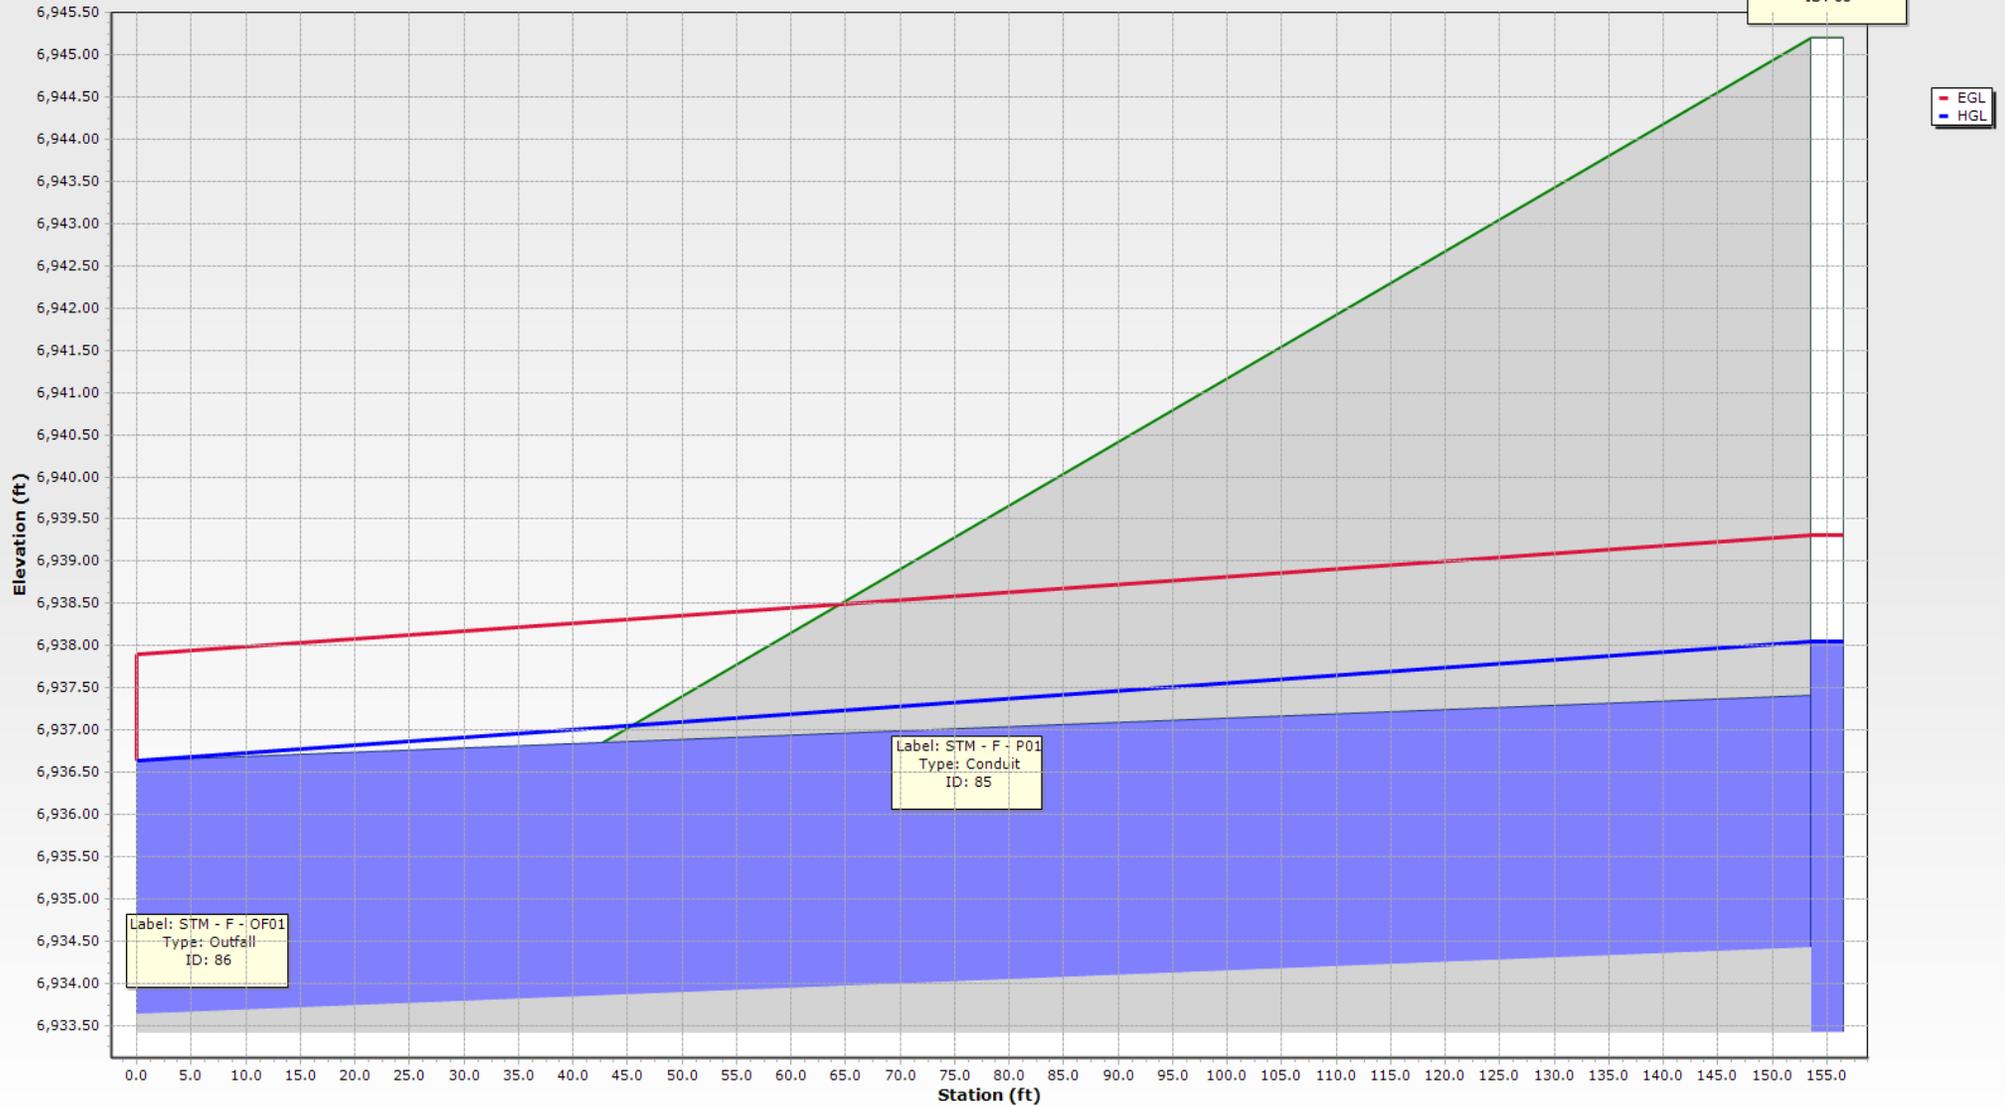

Storm - G - 100 YR

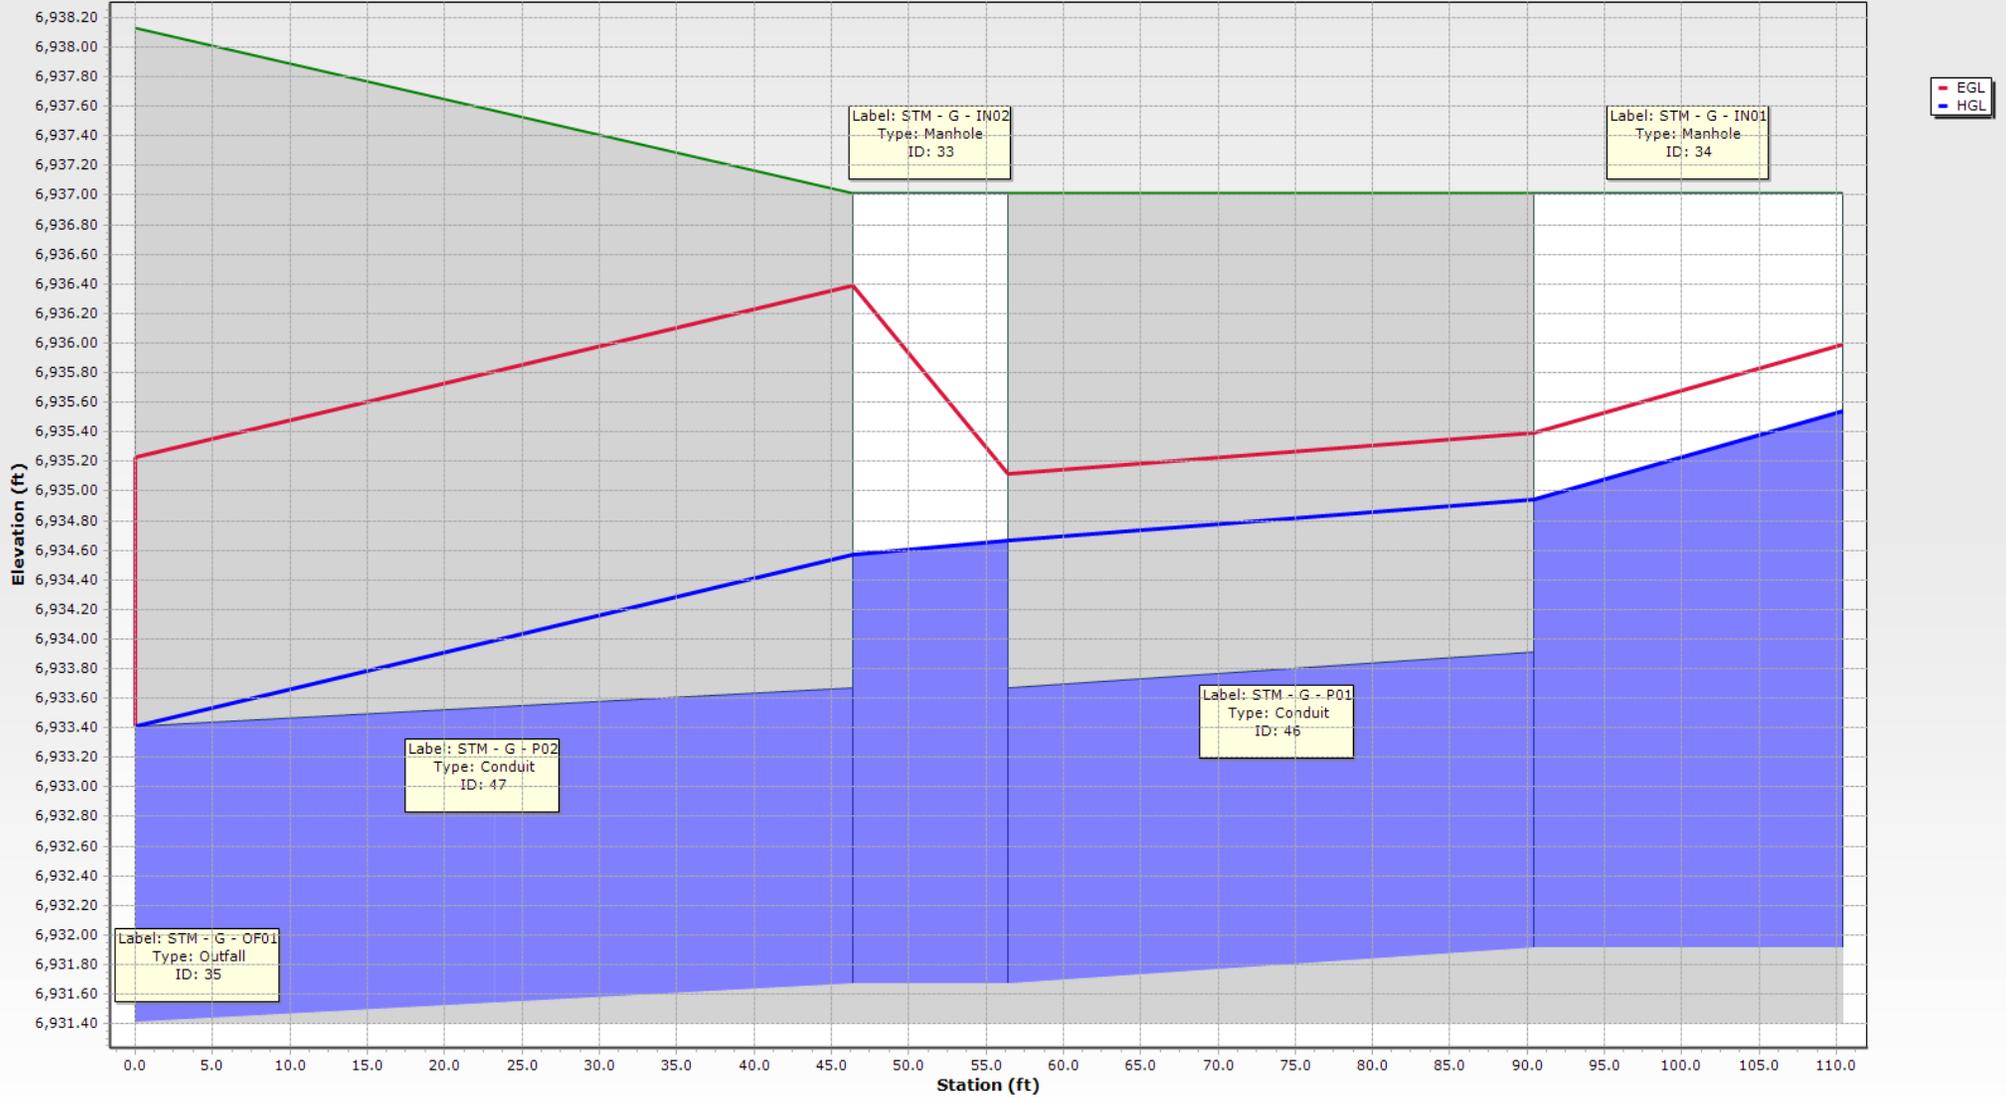


ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-1**

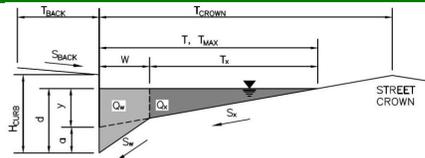

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.010$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 10.9 | 113.0 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-2 (North Approach)**

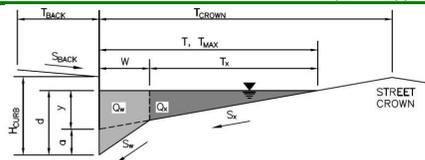

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.023$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 16.5 | 127.8 | cfs |


Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-2**

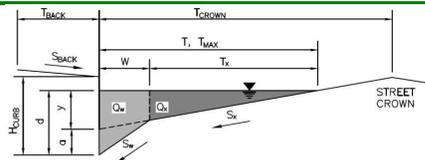

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |


Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-3**

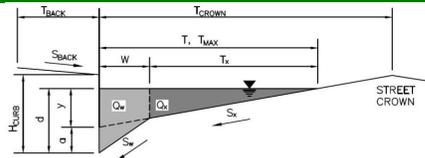

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.013$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 12.4 | 128.8 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-4**

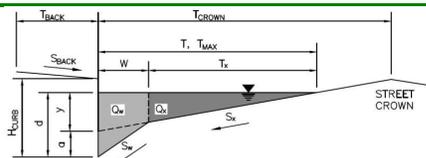

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
 Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-4 @ Bent Grass M.D.**

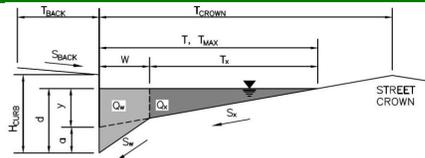


| Gutter Geometry (Enter data in the blue cells) | | | | | | | | | | | | | |
|--|---|-------------|-------------|-------------|--|---------------|------|-------|-----|-------------|-----|------|--------|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 14.0$ ft | | | | | | | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 26.0$ ft | | | | | | | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | | | | | | | |
| Street Transverse Slope | $S_X = 0.020$ ft/ft | | | | | | | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_W = 0.083$ ft/ft | | | | | | | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_0 = 0.010$ ft/ft | | | | | | | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <thead> <tr> <th></th> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>$T_{MAX} =$</td> <td>26.0</td> <td>26.0</td> <td>ft</td> </tr> <tr> <td>$d_{MAX} =$</td> <td>6.0</td> <td>12.0</td> <td>inches</td> </tr> </tbody> </table> | | Minor Storm | Major Storm | | $T_{MAX} =$ | 26.0 | 26.0 | ft | $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | Minor Storm | Major Storm | | | | | | | | | | | |
| $T_{MAX} =$ | 26.0 | 26.0 | ft | | | | | | | | | | |
| $d_{MAX} =$ | 6.0 | 12.0 | inches | | | | | | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | | | | | | | | | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <input type="checkbox"/> <input checked="" type="checkbox"/> check = yes | | | | | | | | | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th></th> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>$Q_{allow} =$</td> <td>13.8</td> <td>143.2</td> <td>cfs</td> </tr> </tbody> </table> | | Minor Storm | Major Storm | | $Q_{allow} =$ | 13.8 | 143.2 | cfs | | | | |
| | Minor Storm | Major Storm | | | | | | | | | | | |
| $Q_{allow} =$ | 13.8 | 143.2 | cfs | | | | | | | | | | |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-5**

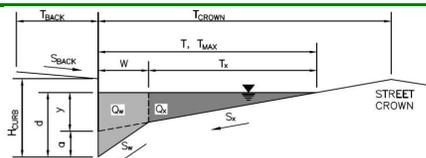

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |


MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

INLET ON A CONTINUOUS GRADE


Version 4.05 Released March 2017

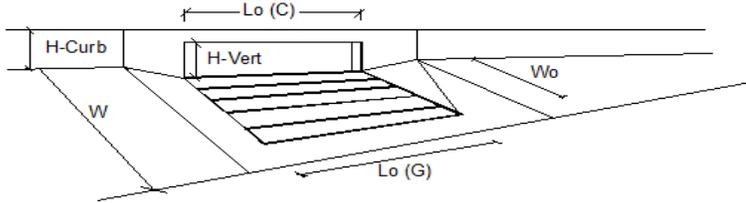

| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 15.00 | 15.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 3.9 | 14.9 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.0 | 8.1 | cfs |
| Capture Percentage = Q_i/Q_o | 100 | 65 | % |

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

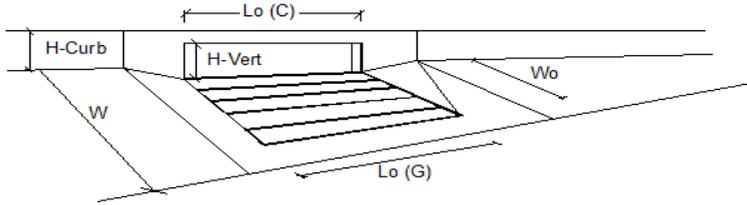


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 2 | 2 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 10.00 | 10.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 13.1 | 18.6 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.5 | 4.4 | cfs |
| Capture Percentage = Q_i/Q_o | 96 | 81 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-6 @ Bent Grass M.D.**

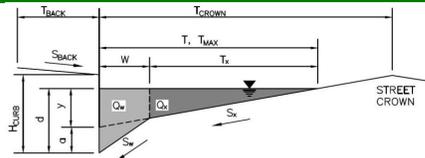

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.020$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 15.4 | 133.3 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-7**

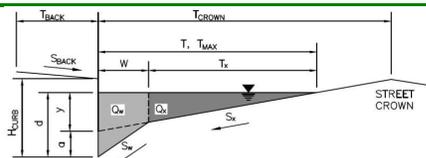

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 14.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 26.0$ ft
 $W = 2.00$ ft

Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.000$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Check boxes are not applicable in SUMP conditions


| | Minor Storm | Major Storm | |
|-------------|-------------|-------------|--------|
| $T_{MAX} =$ | 26.0 | 26.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |

MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | SUMP | SUMP | cfs |

INLET IN A SUMP OR SAG LOCATION

Version 4.05 Released March 2017

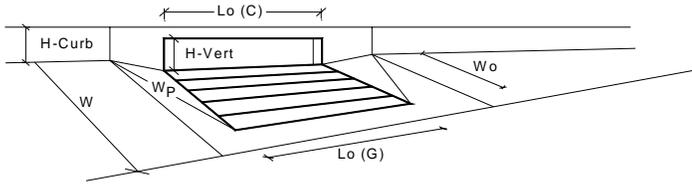


| Design Information (Input) | MINOR | MAJOR | |
|--|--------------------------|-------|---|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a' from above) | 3.00 | 3.00 | inches |
| Number of Unit Inlets (Grate or Curb Opening) | 1 | 1 | |
| Water Depth at Flowline (outside of local depression) | 6.0 | 12.0 | inches |
| Grate Information | MINOR | MAJOR | <input checked="" type="checkbox"/> Override Depths |
| Length of a Unit Grate | N/A | N/A | feet |
| Width of a Unit Grate | N/A | N/A | feet |
| Area Opening Ratio for a Grate (typical values 0.15-0.90) | N/A | N/A | |
| Clogging Factor for a Single Grate (typical value 0.50 - 0.70) | N/A | N/A | |
| Grate Weir Coefficient (typical value 2.15 - 3.60) | N/A | N/A | |
| Grate Orifice Coefficient (typical value 0.60 - 0.80) | N/A | N/A | |
| Curb Opening Information | MINOR | MAJOR | |
| Length of a Unit Curb Opening | 10.00 | 10.00 | feet |
| Height of Vertical Curb Opening in Inches | 6.00 | 6.00 | inches |
| Height of Curb Orifice Throat in Inches | 6.00 | 6.00 | inches |
| Angle of Throat (see USDCM Figure ST-5) | 63.40 | 63.40 | degrees |
| Side Width for Depression Pan (typically the gutter width of 2 feet) | 2.00 | 2.00 | feet |
| Clogging Factor for a Single Curb Opening (typical value 0.10) | 0.10 | 0.10 | |
| Curb Opening Weir Coefficient (typical value 2.3-3.7) | 3.60 | 3.60 | |
| Curb Opening Orifice Coefficient (typical value 0.60 - 0.70) | 0.67 | 0.67 | |
| Low Head Performance Reduction (Calculated) | MINOR | MAJOR | |
| Depth for Grate Midwidth | N/A | N/A | ft |
| Depth for Curb Opening Weir Equation | 0.33 | 0.83 | ft |
| Combination Inlet Performance Reduction Factor for Long Inlets | 0.57 | 1.00 | |
| Curb Opening Performance Reduction Factor for Long Inlets | 0.93 | 1.00 | |
| Grated Inlet Performance Reduction Factor for Long Inlets | N/A | N/A | |
| Total Inlet Interception Capacity (assumes clogged condition) | MINOR | MAJOR | |
| Q_a | 8.3 | 25.5 | cfs |
| Q _{PEAK REQUIRED} | 2.9 | 20.4 | cfs |

Inlet Capacity IS GOOD for Minor and Major Storms(>Q PEAK)

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-8 (East Approach)**

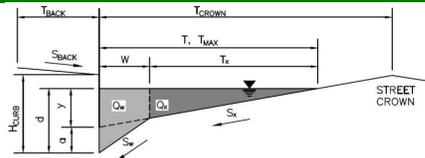


| Gutter Geometry (Enter data in the blue cells) | | | | | | | |
|--|---|-------------|-------------|-------------|--------------------------|-------------------------------------|--------|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 14.0$ ft | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 26.0$ ft | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | |
| Street Transverse Slope | $S_X = 0.020$ ft/ft | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_W = 0.083$ ft/ft | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_O = 0.019$ ft/ft | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>26.0</td> <td>26.0</td> <td>ft</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | 26.0 | 26.0 | ft |
| Minor Storm | Major Storm | | | | | | |
| 26.0 | 26.0 | ft | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>6.0</td> <td>12.0</td> <td>inches</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | 6.0 | 12.0 | inches |
| Minor Storm | Major Storm | | | | | | |
| 6.0 | 12.0 | inches | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>check = yes</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td></td> </tr> </tbody> </table> | Minor Storm | Major Storm | check = yes | <input type="checkbox"/> | <input checked="" type="checkbox"/> | |
| Minor Storm | Major Storm | check = yes | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>19.0</td> <td>171.5</td> <td>cfs</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | 19.0 | 171.5 | cfs |
| Minor Storm | Major Storm | | | | | | |
| 19.0 | 171.5 | cfs | | | | | |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-8 (West Approach)**

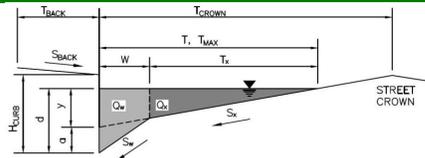


| Gutter Geometry (Enter data in the blue cells) | | | | | | | |
|--|---|-------------|-------------|-------------|--------------------------|-------------------------------------|--------|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 14.0$ ft | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 26.0$ ft | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | |
| Street Transverse Slope | $S_X = 0.020$ ft/ft | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_W = 0.083$ ft/ft | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_O = 0.011$ ft/ft | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>26.0</td> <td>26.0</td> <td>ft</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | 26.0 | 26.0 | ft |
| Minor Storm | Major Storm | | | | | | |
| 26.0 | 26.0 | ft | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>6.0</td> <td>12.0</td> <td>inches</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | 6.0 | 12.0 | inches |
| Minor Storm | Major Storm | | | | | | |
| 6.0 | 12.0 | inches | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>check = yes</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td></td> </tr> </tbody> </table> | Minor Storm | Major Storm | check = yes | <input type="checkbox"/> | <input checked="" type="checkbox"/> | |
| Minor Storm | Major Storm | check = yes | | | | | |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>14.5</td> <td>150.2</td> <td>cfs</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | 14.5 | 150.2 | cfs |
| Minor Storm | Major Storm | | | | | | |
| 14.5 | 150.2 | cfs | | | | | |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-8**

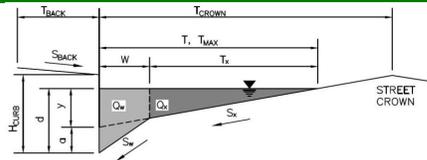

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} =$ 14.0 ft
 $S_{BACK} =$ 0.020 ft/ft
 $n_{BACK} =$ 0.013

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} =$ 6.00 inches
 $T_{CROWN} =$ 26.0 ft
 $W =$ 2.00 ft
 $S_X =$ 0.020 ft/ft
 $S_W =$ 0.083 ft/ft
 $S_0 =$ 0.000 ft/ft
 $n_{STREET} =$ 0.016

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Check boxes are not applicable in SUMP conditions

| | Minor Storm | Major Storm | |
|-------------|--------------------------|--------------------------|--------|
| $T_{MAX} =$ | 26.0 | 26.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input type="checkbox"/> | |


MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

| Minor Storm | Major Storm | |
|-------------|-------------|-----|
| SUMP | SUMP | cfs |

INLET IN A SUMP OR SAG LOCATION

Version 4.05 Released March 2017

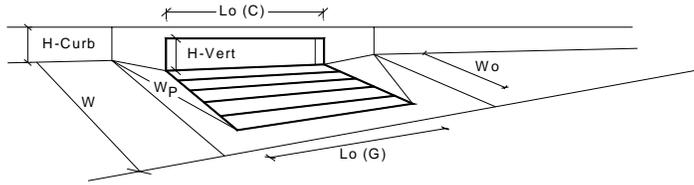


| Design Information (Input) | MINOR | MAJOR | |
|--|--------------------------|-------|---|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a' from above) | 3.00 | 3.00 | inches |
| Number of Unit Inlets (Grate or Curb Opening) | 2 | 2 | |
| Water Depth at Flowline (outside of local depression) | 6.0 | 12.0 | inches |
| Grate Information | MINOR | MAJOR | <input checked="" type="checkbox"/> Override Depths |
| Length of a Unit Grate | N/A | N/A | feet |
| Width of a Unit Grate | N/A | N/A | feet |
| Area Opening Ratio for a Grate (typical values 0.15-0.90) | N/A | N/A | |
| Clogging Factor for a Single Grate (typical value 0.50 - 0.70) | N/A | N/A | |
| Grate Weir Coefficient (typical value 2.15 - 3.60) | N/A | N/A | |
| Grate Orifice Coefficient (typical value 0.60 - 0.80) | N/A | N/A | |
| Curb Opening Information | MINOR | MAJOR | |
| Length of a Unit Curb Opening | 10.00 | 10.00 | feet |
| Height of Vertical Curb Opening in Inches | 6.00 | 6.00 | inches |
| Height of Curb Orifice Throat in Inches | 6.00 | 6.00 | inches |
| Angle of Throat (see USDCM Figure ST-5) | 63.40 | 63.40 | degrees |
| Side Width for Depression Pan (typically the gutter width of 2 feet) | 2.00 | 2.00 | feet |
| Clogging Factor for a Single Curb Opening (typical value 0.10) | 0.10 | 0.10 | |
| Curb Opening Weir Coefficient (typical value 2.3-3.7) | 3.60 | 3.60 | |
| Curb Opening Orifice Coefficient (typical value 0.60 - 0.70) | 0.67 | 0.67 | |
| Low Head Performance Reduction (Calculated) | MINOR | MAJOR | |
| Depth for Grate Midwidth | N/A | N/A | ft |
| Depth for Curb Opening Weir Equation | 0.33 | 0.83 | ft |
| Combination Inlet Performance Reduction Factor for Long Inlets | 0.57 | 1.00 | |
| Curb Opening Performance Reduction Factor for Long Inlets | 0.79 | 1.00 | |
| Grated Inlet Performance Reduction Factor for Long Inlets | N/A | N/A | |
| Total Inlet Interception Capacity (assumes clogged condition) | MINOR | MAJOR | |
| Q_a | 14.4 | 52.7 | cfs |
| Q _{PEAK REQUIRED} | 11.8 | 20.4 | cfs |

Inlet Capacity IS GOOD for Minor and Major Storms(>Q PEAK)

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: Bent Grass Residential Filing No. 2
 Inlet ID: DP-12

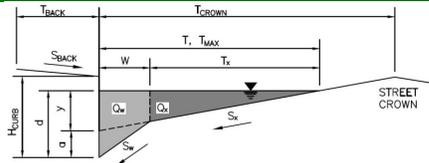


| Gutter Geometry (Enter data in the blue cells) | | | | | | | |
|---|---|-------------|-------------|--------|--------------------|---------------------|--|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 8.0$ ft | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 17.0$ ft | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | |
| Street Transverse Slope | $S_x = 0.020$ ft/ft | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_w = 0.083$ ft/ft | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_o = 0.015$ ft/ft | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>ft</th> </tr> <tr> <td>$T_{MAX} = 17.0$</td> <td>$T_{MAX} = 17.0$</td> <td></td> </tr> </table> | Minor Storm | Major Storm | ft | $T_{MAX} = 17.0$ | $T_{MAX} = 17.0$ | |
| Minor Storm | Major Storm | ft | | | | | |
| $T_{MAX} = 17.0$ | $T_{MAX} = 17.0$ | | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | <table border="1"> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>inches</th> </tr> <tr> <td>$d_{MAX} = 6.0$</td> <td>$d_{MAX} = 12.0$</td> <td></td> </tr> </table> | Minor Storm | Major Storm | inches | $d_{MAX} = 6.0$ | $d_{MAX} = 12.0$ | |
| Minor Storm | Major Storm | inches | | | | | |
| $d_{MAX} = 6.0$ | $d_{MAX} = 12.0$ | | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <input type="checkbox"/> Minor Storm <input checked="" type="checkbox"/> Major Storm check = yes | | | | | | |
| MINOR STORM Allowable Capacity is based on Spread Criterion | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | <table border="1"> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>cfs</th> </tr> <tr> <td>$Q_{allow} = 13.3$</td> <td>$Q_{allow} = 138.4$</td> <td></td> </tr> </table> | Minor Storm | Major Storm | cfs | $Q_{allow} = 13.3$ | $Q_{allow} = 138.4$ | |
| Minor Storm | Major Storm | cfs | | | | | |
| $Q_{allow} = 13.3$ | $Q_{allow} = 138.4$ | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-16**

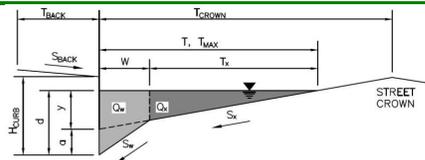

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |


MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.1 | 136.0 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

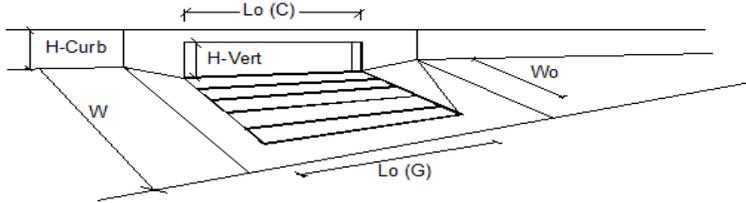


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 15.00 | 15.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 9.8 | 15.5 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 1.1 | 9.4 | cfs |
| Capture Percentage = Q_i/Q_o = | 90 | 62 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-17**

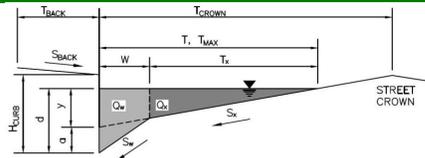

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |


MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.1 | 136.0 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

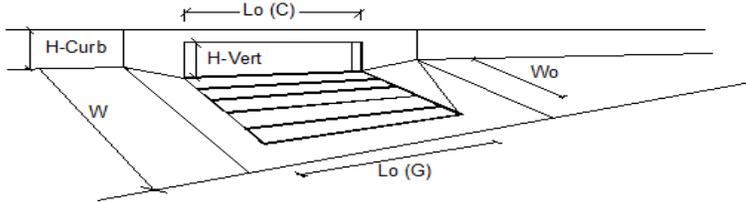


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 10.00 | 10.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 5.8 | 9.2 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 1.2 | 7.7 | cfs |
| Capture Percentage = Q_i/Q_o = | 83 | 54 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-18 (NW Approach)**

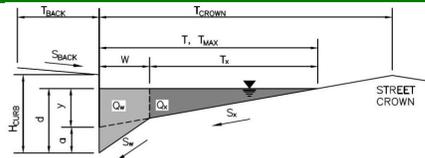

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-18 (SE Approach)**

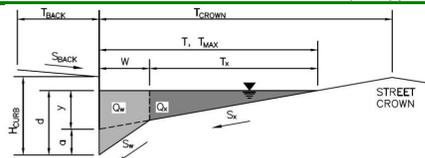

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_X = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_W = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_O = 0.015$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

| | Minor Storm | Major Storm | |
|-------------|-------------|-------------|----|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

| | Minor Storm | Major Storm | |
|-------------|-------------|-------------|--------|
| $d_{MAX} =$ | 6.0 | 12.0 | inches |

Allow Flow Depth at Street Crown (leave blank for no)

check = yes

MINOR STORM Allowable Capacity is based on Spread Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'


Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-18**

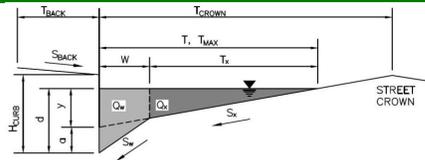

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_x = 0.020$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.000$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Check boxes are not applicable in SUMP conditions


| | Minor Storm | Major Storm | |
|-------------|--------------------------|--------------------------|--------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input type="checkbox"/> | |

MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | SUMP | SUMP | cfs |

INLET IN A SUMP OR SAG LOCATION

Version 4.05 Released March 2017

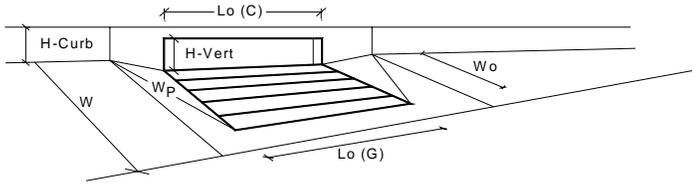


| Design Information (Input) | MINOR | MAJOR | |
|--|--------------------------|-------|---|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a' from above) | 3.00 | 3.00 | inches |
| Number of Unit Inlets (Grate or Curb Opening) | 2 | 2 | |
| Water Depth at Flowline (outside of local depression) | 5.6 | 12.0 | inches |
| Grate Information | MINOR | MAJOR | <input checked="" type="checkbox"/> Override Depths |
| Length of a Unit Grate | N/A | N/A | feet |
| Width of a Unit Grate | N/A | N/A | feet |
| Area Opening Ratio for a Grate (typical values 0.15-0.90) | N/A | N/A | |
| Clogging Factor for a Single Grate (typical value 0.50 - 0.70) | N/A | N/A | |
| Grate Weir Coefficient (typical value 2.15 - 3.60) | N/A | N/A | |
| Grate Orifice Coefficient (typical value 0.60 - 0.80) | N/A | N/A | |
| Curb Opening Information | MINOR | MAJOR | |
| Length of a Unit Curb Opening | 10.00 | 10.00 | feet |
| Height of Vertical Curb Opening in Inches | 6.00 | 6.00 | inches |
| Height of Curb Orifice Throat in Inches | 6.00 | 6.00 | inches |
| Angle of Throat (see USDCM Figure ST-5) | 63.40 | 63.40 | degrees |
| Side Width for Depression Pan (typically the gutter width of 2 feet) | 2.00 | 2.00 | feet |
| Clogging Factor for a Single Curb Opening (typical value 0.10) | 0.10 | 0.10 | |
| Curb Opening Weir Coefficient (typical value 2.3-3.7) | 3.60 | 3.60 | |
| Curb Opening Orifice Coefficient (typical value 0.60 - 0.70) | 0.67 | 0.67 | |
| Low Head Performance Reduction (Calculated) | MINOR | MAJOR | |
| Depth for Grate Midwidth | N/A | N/A | ft |
| Depth for Curb Opening Weir Equation | 0.30 | 0.83 | ft |
| Combination Inlet Performance Reduction Factor for Long Inlets | 0.53 | 1.00 | |
| Curb Opening Performance Reduction Factor for Long Inlets | 0.76 | 1.00 | |
| Grated Inlet Performance Reduction Factor for Long Inlets | N/A | N/A | |
| Total Inlet Interception Capacity (assumes clogged condition) | MINOR | MAJOR | |
| Q_a | 11.8 | 52.7 | cfs |
| Q_{PEAK REQUIRED} | 9.0 | 27.4 | cfs |

Inlet Capacity IS GOOD for Minor and Major Storms(>Q PEAK)

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-19 (SE Approach)**

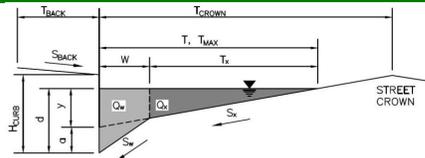

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.010$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 10.9 | 113.0 | cfs |


Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**


Inlet ID: **DP-19**

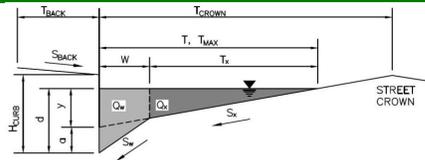

| Gutter Geometry (Enter data in the blue cells) | | | | | |
|--|--|-------------|-------------|------------------------|-------------------------|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 8.0$ ft | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 17.0$ ft | | | | |
| Gutter Width | $W = 2.00$ ft | | | | |
| Street Transverse Slope | $S_x = 0.020$ ft/ft | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_w = 0.083$ ft/ft | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_o = 0.000$ ft/ft | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <tr> <th>Minor Storm</th> <th>Major Storm</th> </tr> <tr> <td>$T_{MAX} = 17.0$ ft</td> <td>$T_{MAX} = 17.0$ ft</td> </tr> </table> | Minor Storm | Major Storm | $T_{MAX} = 17.0$ ft | $T_{MAX} = 17.0$ ft |
| Minor Storm | Major Storm | | | | |
| $T_{MAX} = 17.0$ ft | $T_{MAX} = 17.0$ ft | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | <table border="1"> <tr> <th>Minor Storm</th> <th>Major Storm</th> </tr> <tr> <td>$d_{MAX} = 6.0$ inches</td> <td>$d_{MAX} = 12.0$ inches</td> </tr> </table> | Minor Storm | Major Storm | $d_{MAX} = 6.0$ inches | $d_{MAX} = 12.0$ inches |
| Minor Storm | Major Storm | | | | |
| $d_{MAX} = 6.0$ inches | $d_{MAX} = 12.0$ inches | | | | |
| Check boxes are not applicable in SUMP conditions | <input type="checkbox"/> <input type="checkbox"/> | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | |
| $Q_{allow} =$ | <table border="1"> <tr> <th>Minor Storm</th> <th>Major Storm</th> </tr> <tr> <td>SUMP</td> <td>SUMP</td> </tr> </table> cfs | Minor Storm | Major Storm | SUMP | SUMP |
| Minor Storm | Major Storm | | | | |
| SUMP | SUMP | | | | |

INLET IN A SUMP OR SAG LOCATION

Version 4.05 Released March 2017

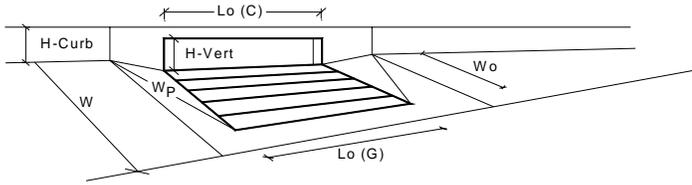


| Design Information (Input) | MINOR | MAJOR | |
|--|--------------------------|-------|---|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a' from above) | 3.00 | 3.00 | inches |
| Number of Unit Inlets (Grate or Curb Opening) | 2 | 2 | |
| Water Depth at Flowline (outside of local depression) | 5.6 | 12.0 | inches |
| Grate Information | MINOR | MAJOR | <input checked="" type="checkbox"/> Override Depths |
| Length of a Unit Grate | N/A | N/A | feet |
| Width of a Unit Grate | N/A | N/A | feet |
| Area Opening Ratio for a Grate (typical values 0.15-0.90) | N/A | N/A | |
| Clogging Factor for a Single Grate (typical value 0.50 - 0.70) | N/A | N/A | |
| Grate Weir Coefficient (typical value 2.15 - 3.60) | N/A | N/A | |
| Grate Orifice Coefficient (typical value 0.60 - 0.80) | N/A | N/A | |
| Curb Opening Information | MINOR | MAJOR | |
| Length of a Unit Curb Opening | 10.00 | 10.00 | feet |
| Height of Vertical Curb Opening in Inches | 6.00 | 6.00 | inches |
| Height of Curb Orifice Throat in Inches | 6.00 | 6.00 | inches |
| Angle of Throat (see USDCM Figure ST-5) | 63.40 | 63.40 | degrees |
| Side Width for Depression Pan (typically the gutter width of 2 feet) | 2.00 | 2.00 | feet |
| Clogging Factor for a Single Curb Opening (typical value 0.10) | 0.10 | 0.10 | |
| Curb Opening Weir Coefficient (typical value 2.3-3.7) | 3.60 | 3.60 | |
| Curb Opening Orifice Coefficient (typical value 0.60 - 0.70) | 0.67 | 0.67 | |
| Low Head Performance Reduction (Calculated) | MINOR | MAJOR | |
| Depth for Grate Midwidth | N/A | N/A | ft |
| Depth for Curb Opening Weir Equation | 0.30 | 0.83 | ft |
| Combination Inlet Performance Reduction Factor for Long Inlets | 0.53 | 1.00 | |
| Curb Opening Performance Reduction Factor for Long Inlets | 0.76 | 1.00 | |
| Grated Inlet Performance Reduction Factor for Long Inlets | N/A | N/A | |
| Total Inlet Interception Capacity (assumes clogged condition) | MINOR | MAJOR | |
| Q_a | 11.8 | 52.7 | cfs |
| $Q_{PEAK REQUIRED}$ | 11.0 | 32.0 | cfs |

Inlet Capacity IS GOOD for Minor and Major Storms(>Q PEAK)

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-21**

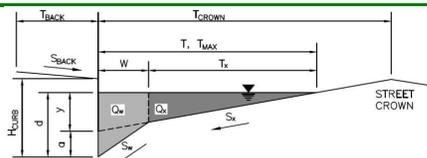

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_X = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_W = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_0 = 0.015$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

| | Minor Storm | Major Storm | |
|-------------|-------------|-------------|----|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

| | Minor Storm | Major Storm | |
|-------------|-------------|-------------|--------|
| $d_{MAX} =$ | 6.0 | 12.0 | inches |

Allow Flow Depth at Street Crown (leave blank for no)

check = yes

MINOR STORM Allowable Capacity is based on Spread Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

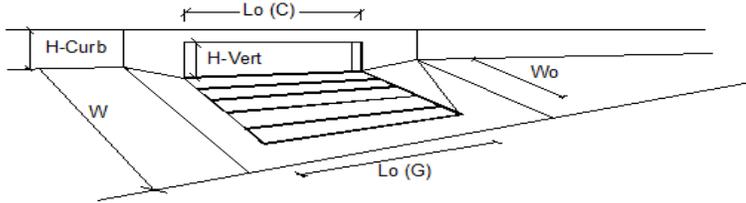


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 2 | 2 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 10.00 | 10.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 9.4 | 23.1 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.0 | 12.1 | cfs |
| Capture Percentage = Q_i/Q_o = | 100 | 66 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-22**

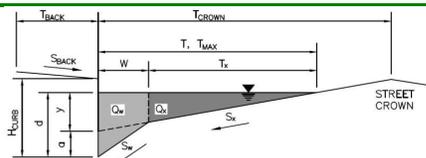

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 8.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 17.0 | 17.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |


MINOR STORM Allowable Capacity is based on Spread Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 13.3 | 138.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

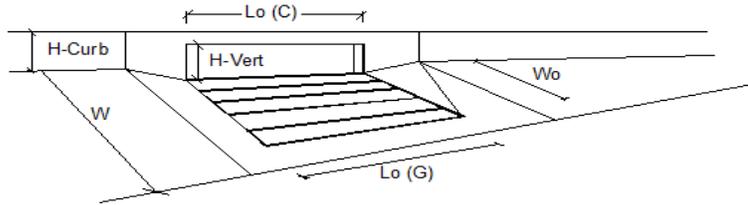


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 2 | 2 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 10.00 | 10.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 12.3 | 23.1 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.2 | 12.1 | cfs |
| Capture Percentage = Q_s/Q_o = | 98 | 66 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-22 @ Bent Grass M.D.**

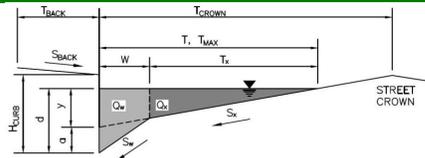

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} = 14.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 26.0$ ft
 $W = 2.00$ ft
 $S_X = 0.020$ ft/ft
 $S_W = 0.083$ ft/ft
 $S_0 = 0.015$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 26.0 | 26.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |

MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion


| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 16.9 | 175.4 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

AREA INLET IN A SWALE

Bent Grass Residential Filing No. 2

DP-23

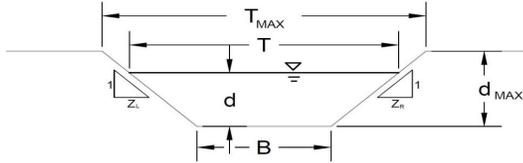

This worksheet uses the NRCS vegetative retardance method to determine Manning's n.
For more information see Section 7.2.3 of the USDCM.

Analysis of Trapezoidal Grass-Lined Channel Using SCS Method

NRCS Vegetal Retardance (A, B, C, D, or E)
Manning's n (Leave cell D16 blank to manually enter an n value)
Channel Invert Slope
Bottom Width
Left Side Slope
Right Side Slope

A, B, C, D or E
n = 0.030
S₀ = 0.0030 ft/ft
B = 3.00 ft
Z₁ = 4.00 ft/ft
Z₂ = 4.00 ft/ft

Check one of the following soil types:

| Soil Type: | Max. Velocity (V _{MAX}) | Max Froude No. (F _{MAX}) |
|--------------|-----------------------------------|------------------------------------|
| Non-Cohesive | 5.0 fps | 0.60 |
| Cohesive | 7.0 fps | 0.80 |
| Paved | N/A | N/A |

Choose One:

Non-Cohesive
 Cohesive
 Paved

Max. Allowable Top Width of Channel for Minor & Major Storm
Max. Allowable Water Depth in Channel for Minor & Major Storm

| | Minor Storm | Major Storm | |
|--------------------|-------------|-------------|------|
| T _{MAX} = | 19.00 | 19.00 | feet |
| d _{MAX} = | 1.50 | 1.50 | feet |

Maximum Channel Capacity Based On Allowable Top Width

Max. Allowable Top Width

Water Depth
Flow Area
Wetted Perimeter
Hydraulic Radius
Manning's n
Flow Velocity
Velocity-Depth Product
Hydraulic Depth
Froude Number

| | Minor Storm | Major Storm | |
|--------------------|-------------|-------------|--------------------|
| T _{MAX} = | 19.00 | 19.00 | ft |
| d = | 2.00 | 2.00 | ft |
| A = | 22.00 | 22.00 | sq ft |
| P = | 19.49 | 19.49 | ft |
| R = | 1.13 | 1.13 | ft |
| n = | 0.030 | 0.030 | |
| V = | 2.95 | 2.95 | fps |
| VR = | 3.33 | 3.33 | ft ² /s |
| D = | 1.16 | 1.16 | ft |
| Fr = | 0.48 | 0.48 | |
| Q _T = | 64.9 | 64.9 | cfs |

Max. Flow Based On Allowable Top Width

Maximum Channel Capacity Based On Allowable Water Depth

Max. Allowable Water Depth

Top Width
Flow Area
Wetted Perimeter
Hydraulic Radius
Manning's n
Flow Velocity
Velocity-Depth Product
Hydraulic Depth
Froude Number

| | Minor Storm | Major Storm | |
|--------------------|-------------|-------------|--------------------|
| d _{MAX} = | 1.50 | 1.50 | feet |
| T = | 15.00 | 15.00 | feet |
| A = | 13.50 | 13.50 | square feet |
| P = | 15.37 | 15.37 | feet |
| R = | 0.88 | 0.88 | feet |
| n = | 0.030 | 0.030 | |
| V = | 2.50 | 2.50 | fps |
| VR = | 2.19 | 2.19 | ft ² /s |
| D = | 0.90 | 0.90 | feet |
| Fr = | 0.46 | 0.46 | |
| Q _d = | 33.7 | 33.7 | cfs |

Max. Flow Based On Allowable Water Depth

Allowable Channel Capacity Based On Channel Geometry

MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|----------------------|-------------|-------------|-----|
| Q _{allow} = | 33.7 | 33.7 | cfs |
| d _{allow} = | 1.50 | 1.50 | ft |

Water Depth in Channel Based On Design Peak Flow

Design Peak Flow

Water Depth

Top Width
Flow Area
Wetted Perimeter
Hydraulic Radius
Manning's n
Flow Velocity
Velocity-Depth Product
Hydraulic Depth
Froude Number

| | Minor Storm | Major Storm | |
|------------------|-------------|-------------|--------------------|
| Q _d = | 4.4 | 21.2 | cfs |
| d = | 0.57 | 1.22 | feet |
| T = | 7.57 | 12.73 | feet |
| A = | 3.02 | 9.57 | square feet |
| P = | 7.71 | 13.03 | feet |
| R = | 0.39 | 0.73 | feet |
| n = | 0.030 | 0.030 | |
| V = | 1.46 | 2.21 | fps |
| VR = | 0.57 | 1.63 | ft ² /s |
| D = | 0.40 | 0.75 | feet |
| Fr = | 0.41 | 0.45 | |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

AREA INLET IN A SWALE

Bent Grass Residential Filing No. 2

DP-23

Inlet Design Information (Input)

Type of Inlet: Inlet Type =

Angle of Inclined Grate (must be <= 30 degrees): $\theta = 0.17$ degrees

Width of Grate: $W = 6.00$ feet

Length of Grate: $L = 3.00$ feet

Open Area Ratio: $A_{RATIO} = 0.70$


Height of Inclined Grate: $H_B = 0.01$ feet

Clogging Factor: $C_l = 0.38$

Grate Discharge Coefficient: $C_d = 0.67$

Orifice Coefficient: $C_o = 0.45$

Weir Coefficient: $C_w = 1.44$

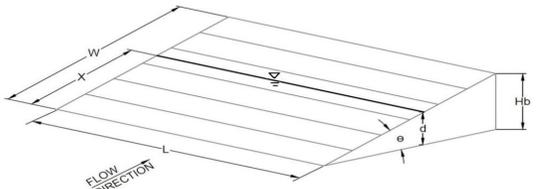

Water Depth at Inlet (for depressed inlets, 1 foot is added for depression):

| | MINOR | MAJOR |
|-----|-------|-------|
| d = | 1.57 | 2.22 |

Grate Capacity as a Weir

Submerged Side Weir Length: $X = 3.00$ feet

Inclined Side Weir Flow: $Q_{ws} = 14.9$ cfs

Base Weir Flow: $Q_{wb} = 42.7$ cfs

Interception without Clogging: $Q_{wi} = 72.4$ cfs

Interception with Clogging: $Q_{wi} = 45.3$ cfs

Grate Capacity as an Orifice

Interception without Clogging: $Q_{oi} = 81.5$ cfs

Interception with Clogging: $Q_{ois} = 50.9$ cfs

Total Inlet Interception Capacity (assumes clogged condition)


| | MINOR | MAJOR |
|--------------------------------------|-------|-------|
| $Q_a =$ | 45.3 | 60.5 |
| Bypassed Flow, $Q_b =$ | 0.0 | 0.0 |
| Capture Percentage = $Q_a/Q_o = C\%$ | 100 | 100 |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**

Inlet ID: **DP-24 (10' Inlet)**

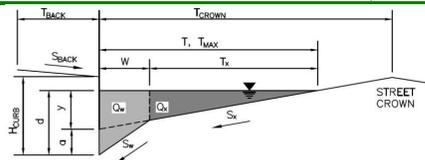

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
 Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
 Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$T_{BACK} =$ 14.0 ft
 $S_{BACK} =$ 0.020 ft/ft
 $n_{BACK} =$ 0.013

Height of Curb at Gutter Flow Line
 Distance from Curb Face to Street Crown
 Gutter Width
 Street Transverse Slope
 Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
 Street Longitudinal Slope - Enter 0 for sump condition
 Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$H_{CURB} =$ 6.00 inches
 $T_{CROWN} =$ 26.0 ft
 $W =$ 2.00 ft
 $S_X =$ 0.020 ft/ft
 $S_W =$ 0.083 ft/ft
 $S_0 =$ 0.028 ft/ft
 $n_{STREET} =$ 0.016

Max. Allowable Spread for Minor & Major Storm
 Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
 Allow Flow Depth at Street Crown (leave blank for no)

| | Minor Storm | Major Storm | |
|-------------|--------------------------|-------------------------------------|-------------|
| $T_{MAX} =$ | 26.0 | 26.0 | ft |
| $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | <input type="checkbox"/> | <input checked="" type="checkbox"/> | check = yes |


MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

| | Minor Storm | Major Storm | |
|---------------|-------------|-------------|-----|
| $Q_{allow} =$ | 18.1 | 152.7 | cfs |

Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'
Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management'

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

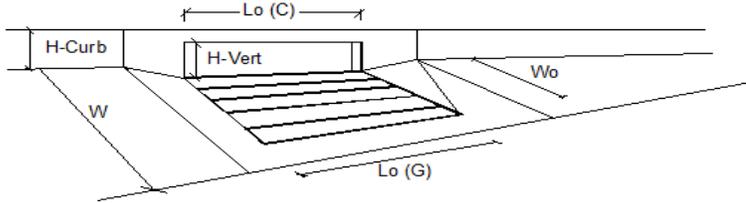


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 10.00 | 10.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 0.0 | 4.2 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.0 | 0.1 | cfs |
| Capture Percentage = Q_i/Q_o = | 0 | 98 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**


Inlet ID: **DP-24 (15' Inlet)**

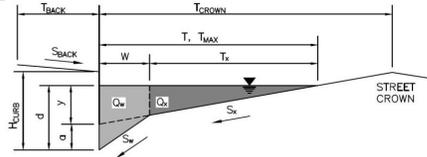

| Gutter Geometry (Enter data in the blue cells) | | | | | | | | | | |
|--|---|-------------|-------------|--|--------------------|---------------------|-----|-----------------|------------------|--------|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 14.0$ ft | | | | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 26.0$ ft | | | | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | | | | |
| Street Transverse Slope | $S_X = 0.020$ ft/ft | | | | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_W = 0.083$ ft/ft | | | | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_0 = 0.028$ ft/ft | | | | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>$T_{MAX} = 26.0$</td> <td>$T_{MAX} = 26.0$</td> <td>ft</td> </tr> <tr> <td>$d_{MAX} = 6.0$</td> <td>$d_{MAX} = 12.0$</td> <td>inches</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | $T_{MAX} = 26.0$ | $T_{MAX} = 26.0$ | ft | $d_{MAX} = 6.0$ | $d_{MAX} = 12.0$ | inches |
| Minor Storm | Major Storm | | | | | | | | | |
| $T_{MAX} = 26.0$ | $T_{MAX} = 26.0$ | ft | | | | | | | | |
| $d_{MAX} = 6.0$ | $d_{MAX} = 12.0$ | inches | | | | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | | | | | | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <input type="checkbox"/> <input checked="" type="checkbox"/> check = yes | | | | | | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>$Q_{allow} = 18.1$</td> <td>$Q_{allow} = 152.7$</td> <td>cfs</td> </tr> </tbody> </table> | Minor Storm | Major Storm | | $Q_{allow} = 18.1$ | $Q_{allow} = 152.7$ | cfs | | | |
| Minor Storm | Major Storm | | | | | | | | | |
| $Q_{allow} = 18.1$ | $Q_{allow} = 152.7$ | cfs | | | | | | | | |

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

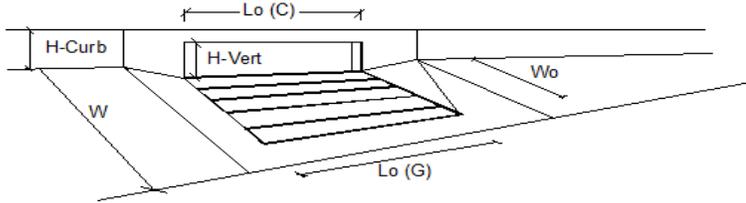


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 15.00 | 15.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 2.3 | 12.8 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.0 | 4.3 | cfs |
| Capture Percentage = Q_i/Q_o = | 100 | 75 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **Bent Grass Residential Filing No. 2**


Inlet ID: **DP-25 (10' Inlet)**

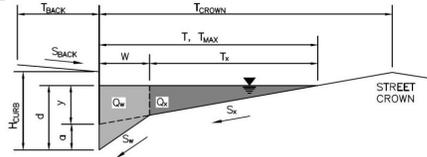

| Gutter Geometry (Enter data in the blue cells) | | | | | | | | | | | | | |
|--|---|-------------|-------------|-------------|--|---------------|------|-------|-----|-------------|-----|------|--------|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 14.0$ ft | | | | | | | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 26.0$ ft | | | | | | | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | | | | | | | |
| Street Transverse Slope | $S_X = 0.020$ ft/ft | | | | | | | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_W = 0.083$ ft/ft | | | | | | | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_0 = 0.028$ ft/ft | | | | | | | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <thead> <tr> <th></th> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>$T_{MAX} =$</td> <td>26.0</td> <td>26.0</td> <td>ft</td> </tr> <tr> <td>$d_{MAX} =$</td> <td>6.0</td> <td>12.0</td> <td>inches</td> </tr> </tbody> </table> | | Minor Storm | Major Storm | | $T_{MAX} =$ | 26.0 | 26.0 | ft | $d_{MAX} =$ | 6.0 | 12.0 | inches |
| | Minor Storm | Major Storm | | | | | | | | | | | |
| $T_{MAX} =$ | 26.0 | 26.0 | ft | | | | | | | | | | |
| $d_{MAX} =$ | 6.0 | 12.0 | inches | | | | | | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | | | | | | | | | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <input type="checkbox"/> <input checked="" type="checkbox"/> check = yes | | | | | | | | | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th></th> <th>Minor Storm</th> <th>Major Storm</th> <th></th> </tr> </thead> <tbody> <tr> <td>$Q_{allow} =$</td> <td>18.1</td> <td>152.7</td> <td>cfs</td> </tr> </tbody> </table> | | Minor Storm | Major Storm | | $Q_{allow} =$ | 18.1 | 152.7 | cfs | | | | |
| | Minor Storm | Major Storm | | | | | | | | | | | |
| $Q_{allow} =$ | 18.1 | 152.7 | cfs | | | | | | | | | | |

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

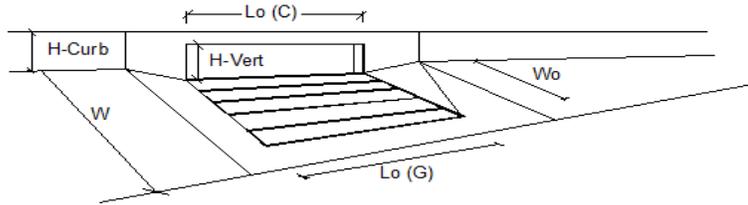


| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 10.00 | 10.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 0.0 | 4.2 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.0 | 0.1 | cfs |
| Capture Percentage = Q_i/Q_o = | 0 | 98 | % |

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)


Project: **Bent Grass Residential Filing No. 2**
 Inlet ID: **DP-25 (15' Inlet)**

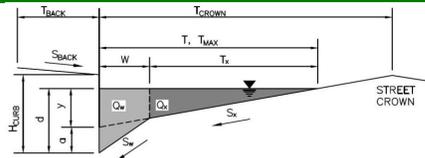

| Gutter Geometry (Enter data in the blue cells) | | | | | | | |
|--|--|-------------|-------------|--------|------|-------|--|
| Maximum Allowable Width for Spread Behind Curb | $T_{BACK} = 14.0$ ft | | | | | | |
| Side Slope Behind Curb (leave blank for no conveyance credit behind curb) | $S_{BACK} = 0.020$ ft/ft | | | | | | |
| Manning's Roughness Behind Curb (typically between 0.012 and 0.020) | $n_{BACK} = 0.013$ | | | | | | |
| Height of Curb at Gutter Flow Line | $H_{CURB} = 6.00$ inches | | | | | | |
| Distance from Curb Face to Street Crown | $T_{CROWN} = 26.0$ ft | | | | | | |
| Gutter Width | $W = 2.00$ ft | | | | | | |
| Street Transverse Slope | $S_X = 0.020$ ft/ft | | | | | | |
| Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft) | $S_W = 0.083$ ft/ft | | | | | | |
| Street Longitudinal Slope - Enter 0 for sump condition | $S_O = 0.028$ ft/ft | | | | | | |
| Manning's Roughness for Street Section (typically between 0.012 and 0.020) | $n_{STREET} = 0.016$ | | | | | | |
| Max. Allowable Spread for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>ft</th> </tr> </thead> <tbody> <tr> <td>26.0</td> <td>26.0</td> <td></td> </tr> </tbody> </table> | Minor Storm | Major Storm | ft | 26.0 | 26.0 | |
| Minor Storm | Major Storm | ft | | | | | |
| 26.0 | 26.0 | | | | | | |
| Max. Allowable Depth at Gutter Flowline for Minor & Major Storm | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>inches</th> </tr> </thead> <tbody> <tr> <td>6.0</td> <td>12.0</td> <td></td> </tr> </tbody> </table> | Minor Storm | Major Storm | inches | 6.0 | 12.0 | |
| Minor Storm | Major Storm | inches | | | | | |
| 6.0 | 12.0 | | | | | | |
| Allow Flow Depth at Street Crown (leave blank for no) | <input type="checkbox"/> <input checked="" type="checkbox"/> check = yes | | | | | | |
| MINOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| MAJOR STORM Allowable Capacity is based on Depth Criterion | | | | | | | |
| Minor storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |
| Major storm max. allowable capacity GOOD - greater than the design flow given on sheet 'Inlet Management' | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Minor Storm</th> <th>Major Storm</th> <th>cfs</th> </tr> </thead> <tbody> <tr> <td>18.1</td> <td>152.7</td> <td></td> </tr> </tbody> </table> | Minor Storm | Major Storm | cfs | 18.1 | 152.7 | |
| Minor Storm | Major Storm | cfs | | | | | |
| 18.1 | 152.7 | | | | | | |

INLET ON A CONTINUOUS GRADE

Version 4.05 Released March 2017

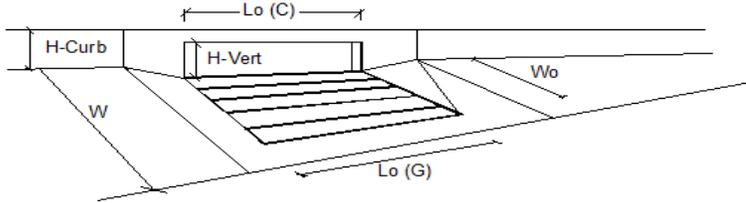

| Design Information (Input) | MINOR | MAJOR | |
|---|--------------------------|-------|--------|
| Type of Inlet | CDOT Type R Curb Opening | | |
| Local Depression (additional to continuous gutter depression 'a') | 3.0 | 3.0 | inches |
| Total Number of Units in the Inlet (Grate or Curb Opening) | 1 | 1 | |
| Length of a Single Unit Inlet (Grate or Curb Opening) | 15.00 | 15.00 | ft |
| Width of a Unit Grate (cannot be greater than W, Gutter Width) | N/A | N/A | ft |
| Clogging Factor for a Single Unit Grate (typical min. value = 0.5) | N/A | N/A | |
| Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1) | 0.10 | 0.10 | |
| Street Hydraulics: OK - Q < Allowable Street Capacity. | | | |
| Total Inlet Interception Capacity | 3.3 | 12.8 | cfs |
| Total Inlet Carry-Over Flow (flow bypassing inlet) | 0.0 | 4.3 | cfs |
| Capture Percentage = Q_i/Q_o = | 100 | 75 | % |

Swale - A

Project Description

Friction Method Manning Formula
Solve For Normal Depth

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.00500 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 1.00 | ft |
| Discharge | 65.10 | ft ³ /s |

Results

| | | |
|------------------|-------------|-----------------|
| Normal Depth | 2.01 | ft |
| Flow Area | 18.18 | ft ² |
| Wetted Perimeter | 17.58 | ft |
| Hydraulic Radius | 1.03 | ft |
| Top Width | 17.08 | ft |
| Critical Depth | 1.63 | ft |
| Critical Slope | 0.01424 | ft/ft |
| Velocity | 3.58 | ft/s |
| Velocity Head | 0.20 | ft |
| Specific Energy | 2.21 | ft |
| Froude Number | 0.61 | |
| Flow Type | Subcritical | |

GVF Input Data

| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 2.01 | ft |
| Critical Depth | 1.63 | ft |
| Channel Slope | 0.00500 | ft/ft |
| Critical Slope | 0.01424 | ft/ft |

Swale - B

Project Description

Friction Method Manning Formula
Solve For Normal Depth

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.05000 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 5.00 | ft |
| Discharge | 24.60 | ft ³ /s |

Results

| | | |
|------------------|---------------|-----------------|
| Normal Depth | 0.55 | ft |
| Flow Area | 3.98 | ft ² |
| Wetted Perimeter | 9.55 | ft |
| Hydraulic Radius | 0.42 | ft |
| Top Width | 9.42 | ft |
| Critical Depth | 0.74 | ft |
| Critical Slope | 0.01646 | ft/ft |
| Velocity | 6.18 | ft/s |
| Velocity Head | 0.59 | ft |
| Specific Energy | 1.15 | ft |
| Froude Number | 1.68 | |
| Flow Type | Supercritical | |

GVF Input Data

| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 0.55 | ft |
| Critical Depth | 0.74 | ft |
| Channel Slope | 0.05000 | ft/ft |
| Critical Slope | 0.01646 | ft/ft |

Swale - C

Project Description

Friction Method Manning Formula
Solve For Normal Depth

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.11000 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 5.00 | ft |
| Discharge | 18.00 | ft ³ /s |

Results

| | | |
|------------------|---------------|-----------------|
| Normal Depth | 0.38 | ft |
| Flow Area | 2.44 | ft ² |
| Wetted Perimeter | 8.09 | ft |
| Hydraulic Radius | 0.30 | ft |
| Top Width | 8.00 | ft |
| Critical Depth | 0.62 | ft |
| Critical Slope | 0.01726 | ft/ft |
| Velocity | 7.38 | ft/s |
| Velocity Head | 0.85 | ft |
| Specific Energy | 1.22 | ft |
| Froude Number | 2.36 | |
| Flow Type | Supercritical | |

GVF Input Data

| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 0.38 | ft |
| Critical Depth | 0.62 | ft |
| Channel Slope | 0.11000 | ft/ft |
| Critical Slope | 0.01726 | ft/ft |

Swale - D

Project Description

| | |
|-----------------|-----------------|
| Friction Method | Manning Formula |
| Solve For | Normal Depth |

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.00500 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 3.00 | ft |
| Discharge | 21.20 | ft ³ /s |

Results

| | | |
|------------------|-------------|-----------------|
| Normal Depth | 1.08 | ft |
| Flow Area | 7.94 | ft ² |
| Wetted Perimeter | 11.93 | ft |
| Hydraulic Radius | 0.67 | ft |
| Top Width | 11.66 | ft |
| Critical Depth | 0.82 | ft |
| Critical Slope | 0.01660 | ft/ft |
| Velocity | 2.67 | ft/s |
| Velocity Head | 0.11 | ft |
| Specific Energy | 1.19 | ft |
| Froude Number | 0.57 | |
| Flow Type | Subcritical | |

GVF Input Data

| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 1.08 | ft |
| Critical Depth | 0.82 | ft |
| Channel Slope | 0.00500 | ft/ft |
| Critical Slope | 0.01660 | ft/ft |

Swale - E

Project Description

Friction Method Manning Formula
Solve For Normal Depth

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.00500 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 3.00 | ft |
| Discharge | 63.70 | ft ³ /s |

Results

| | | |
|------------------|-------------|-----------------|
| Normal Depth | 1.78 | ft |
| Flow Area | 17.97 | ft ² |
| Wetted Perimeter | 17.66 | ft |
| Hydraulic Radius | 1.02 | ft |
| Top Width | 17.22 | ft |
| Critical Depth | 1.41 | ft |
| Critical Slope | 0.01428 | ft/ft |
| Velocity | 3.54 | ft/s |
| Velocity Head | 0.20 | ft |
| Specific Energy | 1.97 | ft |
| Froude Number | 0.61 | |
| Flow Type | Subcritical | |

GVF Input Data

| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 1.78 | ft |
| Critical Depth | 1.41 | ft |
| Channel Slope | 0.00500 | ft/ft |
| Critical Slope | 0.01428 | ft/ft |

Swale - F

Project Description

Friction Method Manning Formula
Solve For Normal Depth

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.01300 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 6.67 | ft |
| Discharge | 91.40 | ft ³ /s |

Results

| | | |
|------------------|-------------|-----------------|
| Normal Depth | 1.39 | ft |
| Flow Area | 16.93 | ft ² |
| Wetted Perimeter | 18.10 | ft |
| Hydraulic Radius | 0.94 | ft |
| Top Width | 17.76 | ft |
| Critical Depth | 1.37 | ft |
| Critical Slope | 0.01372 | ft/ft |
| Velocity | 5.40 | ft/s |
| Velocity Head | 0.45 | ft |
| Specific Energy | 1.84 | ft |
| Froude Number | 0.98 | |
| Flow Type | Subcritical | |

GVF Input Data


| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 1.39 | ft |
| Critical Depth | 1.37 | ft |
| Channel Slope | 0.01300 | ft/ft |
| Critical Slope | 0.01372 | ft/ft |

APPENDIX D
Preliminary Channel HEC-RAS Models

Existing Conditions Model

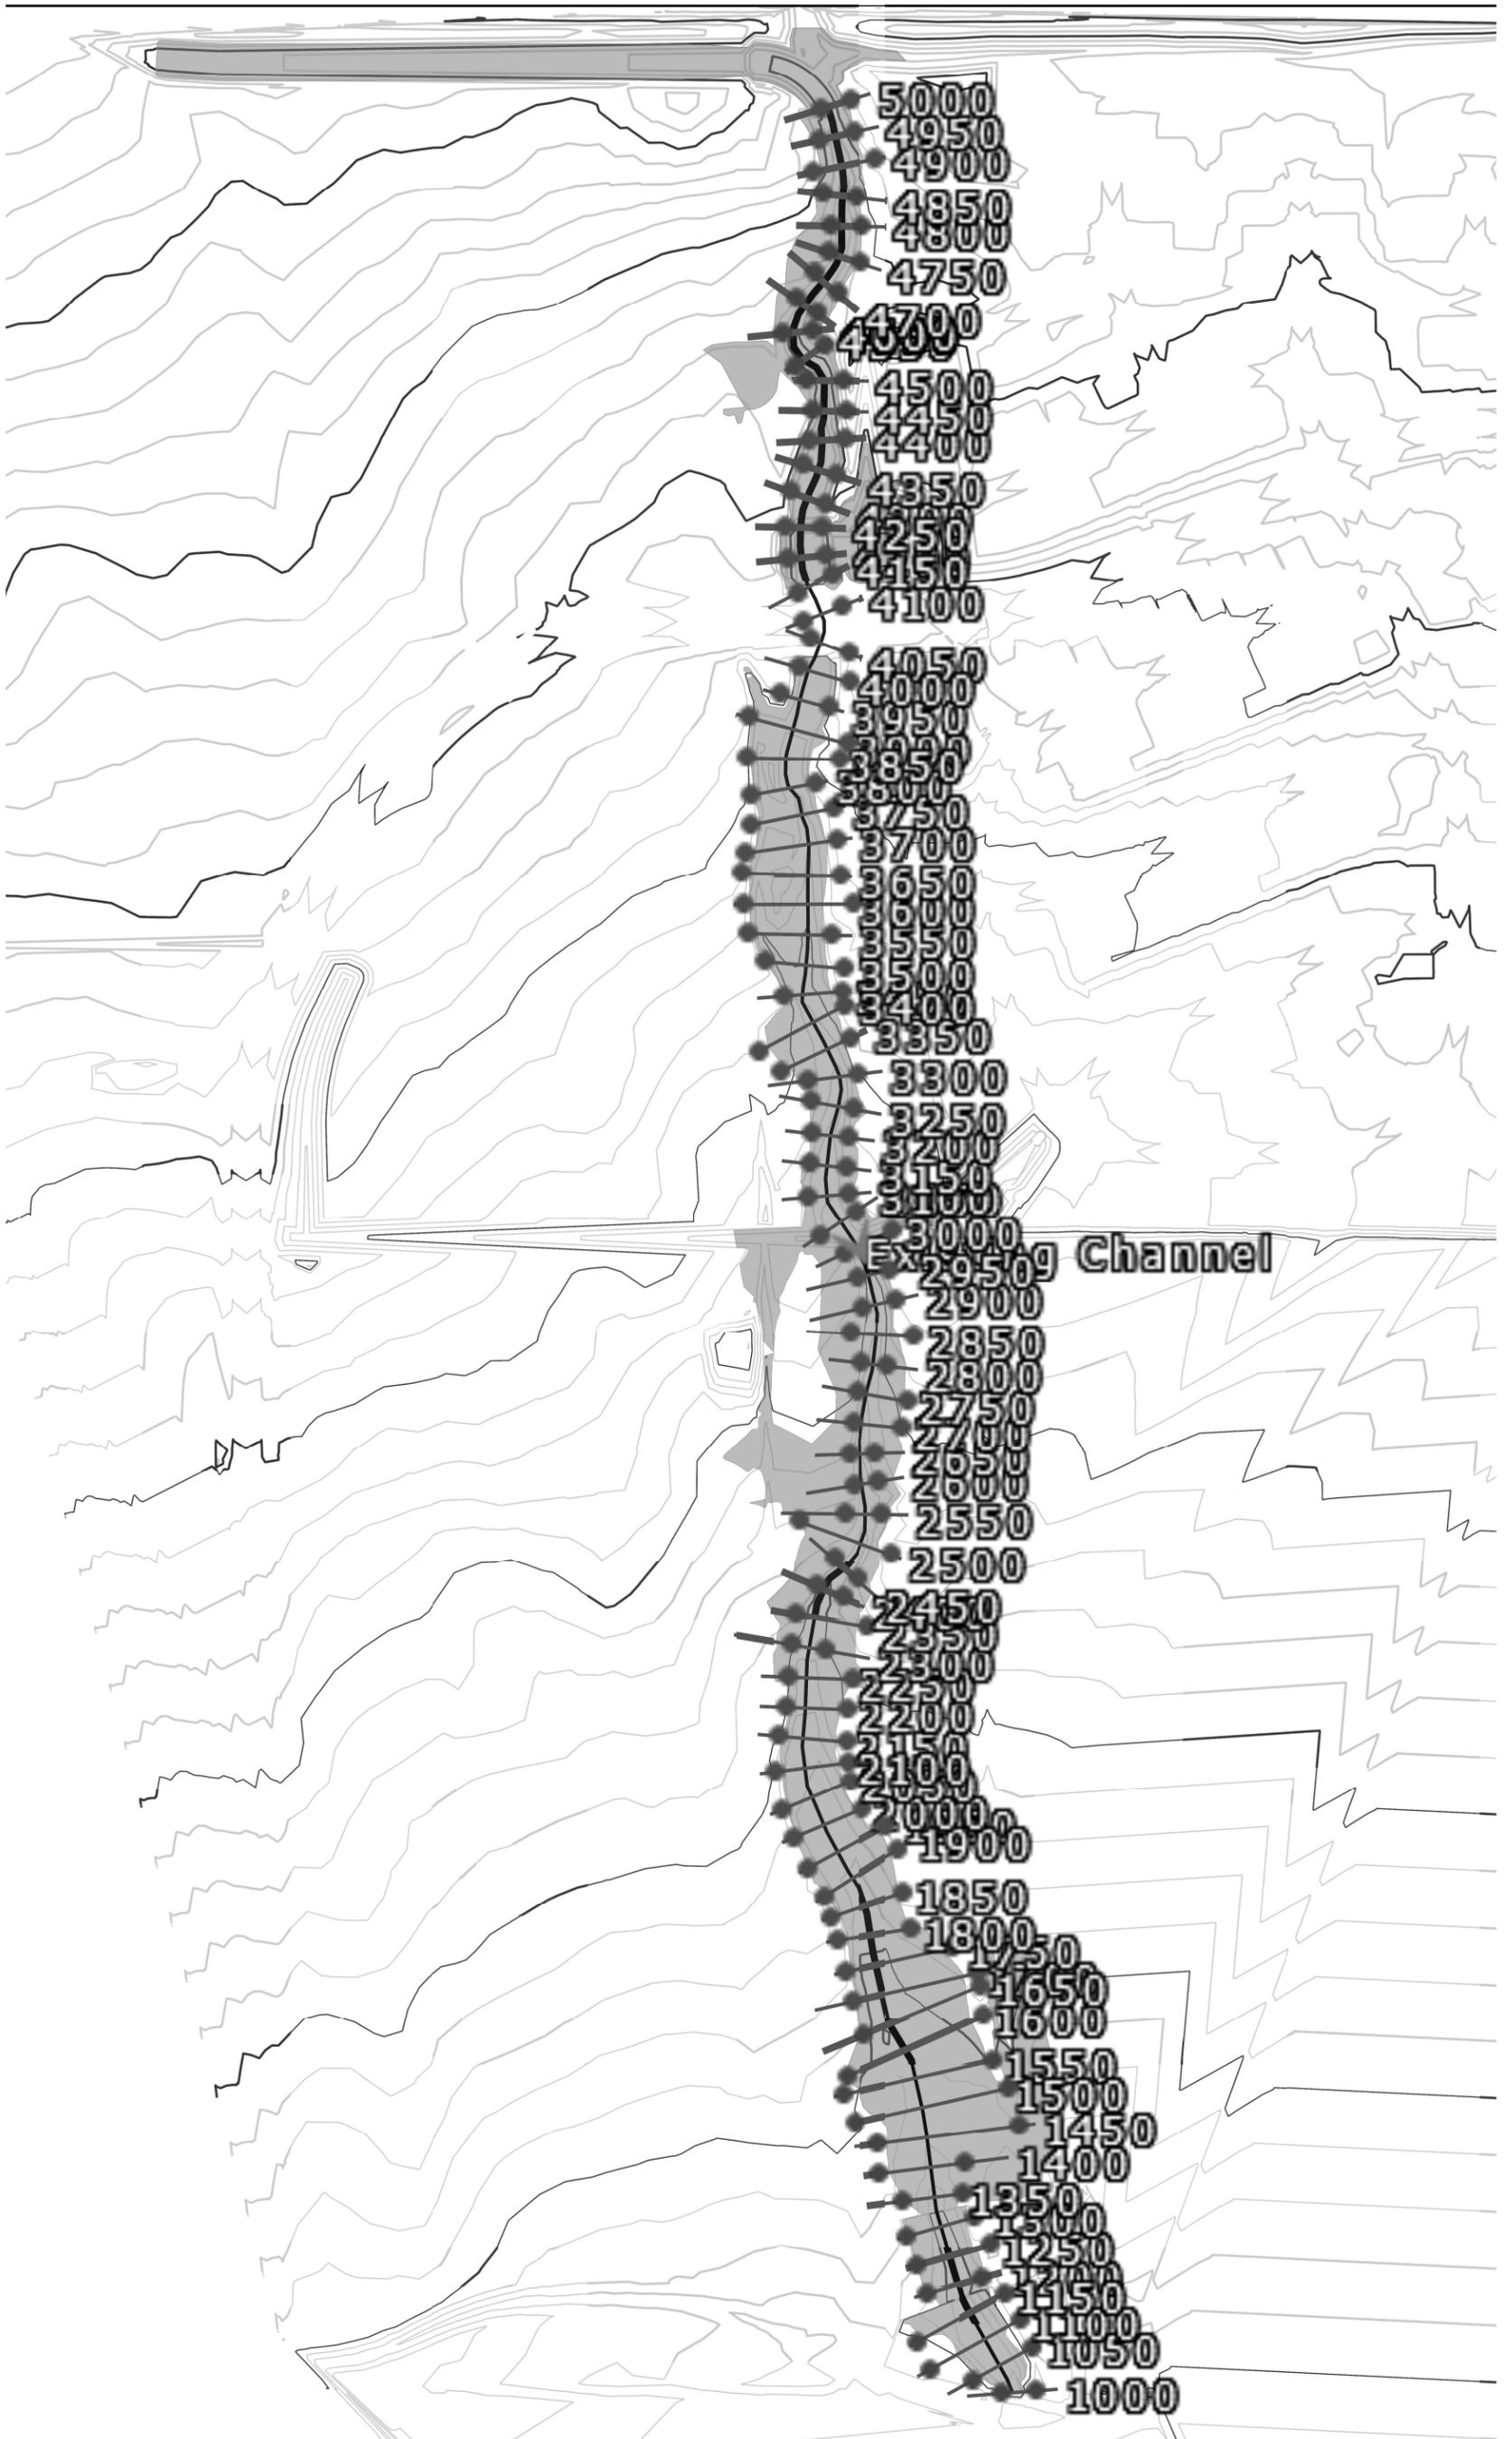

HEC-RAS HEC-RAS 5.0.3 September 2016
U. S. Army Corps of Engineers
Hydrologic Engineering Center
609 Second Street
Davis, California

| | | | | | | |
|----------|------|--------|------|------|--------|-------|
| X | X | XXXXXX | XXXX | XXXX | XX | XXXX |
| X | X | X | X X | X X | X X | X |
| X | X | X | X | X X | X X | X |
| XXXXXXXX | XXXX | X | XXX | XXXX | XXXXXX | XXXX |
| X | X | X | X | X X | X X | X |
| X | X | X | X X | X X | X X | X |
| X | X | XXXXXX | XXXX | X X | X X | XXXXX |

PROJECT DATA

Project Title: HEC-RAS Model
Project File : CLH14. 20_Channel . prj
Run Date and Time: 5/21/2019 2:12:02 PM

Project in English units

Project Description:

CRS Info=<Spatial Reference> <CoordinateSystem Code="3502"
Unit="US_survey_Foot" AcadCode="" /> <Registration OffsetX="0" OffsetY="0"
OffsetZ="0" ScaleX="1" ScaleY="1" ScaleZ="1" /></Spatial Reference>

PLAN DATA

Plan Title: Existing

Plan File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014. 20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2
Prop Drain Rpt\Channel Design\GeoHecRas\CLH14. 20_Channel . p01

Geometry Title: Existing

Geometry File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014. 20-Bent Grass\3. Permit Const Docs\3.04
Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14. 20_Channel . g01

Flow Title : Existing

Flow File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014. 20-Bent Grass\3. Permit Const Docs\3.04

Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14. 20_Channel . f01

Plan Summary Information:

Number of: Cross Sections = 81 Multiple Openings = 0
 Culverts = 0 Inline Structures = 0
 Bridges = 0 Lateral Structures = 0

Computational Information

Water surface calculation tolerance = 0.01
 Critical depth calculation tolerance = 0.01
 Maximum number of iterations = 20
 Maximum difference tolerance = 0.33
 Flow tolerance factor = 0.001

Computation Options

Critical depth computed only where necessary
 Conveyance Calculation Method: At breaks in n values only
 Friction Slope Method: Average Conveyance
 Computational Flow Regime: Subcritical Flow

FLOW DATA

Flow Title: Existing

Flow File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014. 20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2
 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14. 20_Channel . f01

Flow Data (cfs)

| River | Reach | RS | 100-YR | 5-YR |
|-----------------------|-------|------|--------|------|
| Existing Channel East | | 5000 | 43 | 4 |
| Existing Channel East | | 3900 | 880 | 14 |

Boundary Conditions

| River | Reach | Profile | Upstream | Downstream |
|-----------------------|-------|---------|-------------------|-------------------|
| Existing Channel East | | 100-YR | Normal S = 0.0329 | Normal S = 0.0247 |
| Existing Channel East | | 5-YR | Normal S = 0.0329 | Normal S = 0.0247 |

GEOMETRY DATA

Geometry Title: Existing

Geometry File : H:\Challenger Homes Inc\CO, El Paso County-CLH0000014.20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14. 20_Channel . g01

CROSS SECTION

RIVER: Existing Channel

REACH: East RS: 5000

INPUT

Description:

Station Elevation Data num= 10

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|-------|---------|------|---------|
| 0 | 6963.58 | 38.49 | 6963.58 | 42.67 | 6962.96 | 75 | 6959.7 | 89.7 | 6962.75 |
| 110.04 | 6963.46 | 118.77 | 6963.24 | 121.11 | 6963.48 | 125.8 | 6963.63 | 150 | 6963.63 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|------|-------|
| 0 | .05 | 38.49 | .045 | 89.7 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|--------------|--------|
| | 38.49 | 89.7 | | 53.22 | 50 | 51.12 | .1 .3 |

CROSS SECTION

RIVER: Existing Channel

REACH: East RS: 4950

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6964.91 | 4.49 | 6964.91 | 14.11 | 6964.28 | 28.72 | 6963.12 | 45.08 | 6961.83 |
| 66.68 | 6958.45 | 67.88 | 6958.26 | 72.91 | 6957.97 | 75 | 6957.85 | 81.59 | 6957.48 |
| 83.44 | 6957.78 | 105.7 | 6961.57 | 120.79 | 6962.71 | 134.68 | 6963.68 | 150 | 6963.68 |

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 45.08 .045 105.7 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 45.08 105.7 56.3 50 55.05 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4900

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6963.53 12.58 6963.53 20.95 6963.2 27.05 6962.33 36.46 6961.09
 59.75 6957.96 71.58 6956.48 75 6956.22 76.29 6956.13 77.28 6956.08
 80.6 6956.68 100.6 6959.86 126.33 6962.03 150 6963.76

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 20.95 .045 126.33 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 20.95 126.33 71.1 50 38.94 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4850

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6959.99 34.39 6959.99 54.42 6958.91 58.9 6957.85 72.94 6954.52
 75 6954.47 76.05 6954.44 77.22 6954.55 88.32 6956.31 97.52 6957.97
 111.09 6958.96 131.03 6960.59 146.87 6962.04 150 6962.04

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val

0 .05 54.42 .045 111.09 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 54.42 111.09 49.15 50 56.56 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4800

INPUT

Description:

Station Elevation Data num= 12

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6960.57 | 9.2 | 6960.57 | 44.01 | 6958.08 | 59.83 | 6954.92 | 68.81 | 6953.23 |
| 75 | 6953.14 | 76.25 | 6953.12 | 79.12 | 6953.16 | 91.93 | 6955.91 | 95.94 | 6956.94 |
| 100.1 | 6956.93 | 150 | 6956.93 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 44.01 | .045 | 95.94 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 44.01 95.94 61.25 50 43.37 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4750

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6958.34 | 35.51 | 6958.34 | 38.45 | 6958.32 | 40.25 | 6958.17 | 43.73 | 6957.56 |
| 73.46 | 6952.3 | 75 | 6952.25 | 75.36 | 6952.24 | 77.32 | 6952.32 | 89.26 | 6955.07 |
| 96.38 | 6956.45 | 105.11 | 6956.9 | 123.28 | 6956.85 | 137.41 | 6956.83 | 150 | 6956.83 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 40.25 | .045 | 96.38 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 40.25 96.38 62.73 50 41.17 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4700

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|--------|---------|--------|---------|
| 0 | 6958.93 | 6.21 | 6958.93 | 26.86 | 6957.79 | 46.91 | 6956.53 | 55.57 | 6954.93 |
| 72.9 | 6951.61 | 75 | 6951.59 | 75.6 | 6951.58 | 77.45 | 6951.54 | 84.09 | 6952.97 |
| 93.45 | 6955.07 | 97.28 | 6955.56 | 135.4 | 6956.48 | 143.04 | 6956.78 | 144.21 | 6956.78 |
| 145.18 | 6956.78 | 147.21 | 6956.91 | 150 | 6957.05 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 46.91 | .045 | 97.28 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 46.91 97.28 48.59 50 53.31 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4650

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6955.92 | 13 | 6955.92 | 15.98 | 6955.77 | 17.47 | 6955.75 | 19.19 | 6955.69 |
| 39.7 | 6954.03 | 40.71 | 6953.88 | 59.63 | 6950.54 | 61.54 | 6950.65 | 62.99 | 6950.73 |
| 63.73 | 6950.75 | 68.59 | 6951.79 | 81.56 | 6954.29 | 100.82 | 6955.21 | 110.87 | 6955.88 |
| 117.25 | 6955.97 | 128.49 | 6956.29 | 136.54 | 6956.29 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .05 | 39.7 | .045 | 81.56 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 39.7 81.56 31.33 50 63.68 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4600

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|-------|---------|--------|---------|--------|---------|
| 0 | 6955.98 | 3.42 | 6955.98 | 11.44 | 6955.16 | 22.53 | 6954.54 | 39.05 | 6953.33 |
| 60.56 | 6950.2 | 67.66 | 6949.26 | 68.34 | 6949.29 | 69.24 | 6949.27 | 71.52 | 6949.23 |
| 78.98 | 6950.86 | 88.89 | 6953.25 | 99.87 | 6954.11 | 104.06 | 6954.54 | 107.26 | 6954.49 |
| 144.24 | 6954.49 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 39.05 | .045 | 88.89 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 39.05 88.89 31.96 50 60.47 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4550

INPUT

Description:

Station Elevation Data num= 11

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6954.47 | 15.6 | 6953.37 | 18.05 | 6953.02 | 48.88 | 6948.55 | 52.45 | 6948.24 |
| 55.27 | 6947.91 | 55.52 | 6947.88 | 59.39 | 6948.6 | 75.66 | 6952.81 | 89.66 | 6953.03 |
| 91.58 | 6953.08 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .05 | 15.6 | .045 | 75.66 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

15. 6 75. 66 69. 03 50 28. 51 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4500

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6955.85 | 9.47 | 6955.85 | 42.52 | 6953.36 | 46.11 | 6953.07 | 52.65 | 6951.78 |
| 69.08 | 6947.9 | 75 | 6947.95 | 75.53 | 6947.96 | 76.98 | 6947.94 | 83.7 | 6948.98 |
| 107.55 | 6952.53 | 110.42 | 6952.62 | 126.61 | 6953.03 | 127.51 | 6953.05 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 46.11 | .045 | 107.55 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 46.11 | 107.55 | | 50.62 | 50 | 52.59 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4450

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6954.6 | 18.39 | 6954.6 | 39.23 | 6952.75 | 40.72 | 6952.62 | 44.07 | 6951.87 |
| 69.43 | 6946.6 | 73 | 6946.49 | 75 | 6946.44 | 76.07 | 6946.4 | 95.73 | 6951.85 |
| 96.83 | 6952.15 | 115.18 | 6952.51 | 150 | 6952.51 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 40.72 | .045 | 96.83 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 40.72 | 96.83 | | 46.56 | 50 | 51.87 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4400

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|--------|---------|
| 0 | 6954.57 | 12.29 | 6954.57 | 24.56 | 6954.28 | 34.56 | 6953.13 | 39.34 | 6952.67 |
| 42.47 | 6951.97 | 70.43 | 6945.75 | 70.85 | 6945.66 | 70.89 | 6945.64 | 70.91 | 6945.64 |
| 75 | 6944.96 | 75.01 | 6944.96 | 96.91 | 6951.35 | 98.66 | 6951.94 | 121.74 | 6952.08 |
| 150 | 6952.08 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 39.34 | .045 | 98.66 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|-------|-------|----|-------|----|----|
| 39.34 | 98.66 | 61.22 | 50 | 41.17 | .1 | .3 |
|-------|-------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4350

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6951.38 | 40.69 | 6951.38 | 47.23 | 6951.34 | 70.53 | 6944.91 | 70.85 | 6944.84 |
| 70.91 | 6944.83 | 75 | 6944.47 | 75.21 | 6944.46 | 87.72 | 6947.7 | 104.7 | 6951.48 |
| 134.53 | 6952.12 | 141.79 | 6952.34 | 150 | 6952.34 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 47.23 | .045 | 104.7 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|-------|-------|----|-------|----|----|
| 47.23 | 104.7 | 50.69 | 50 | 48.39 | .1 | .3 |
|-------|-------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4300

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6949.81 | 27.06 | 6949.81 | 45.38 | 6949.59 | 68.23 | 6944.71 | 72.38 | 6943.8 |
| 72.71 | 6943.79 | 75 | 6943.87 | 78.16 | 6943.97 | 98.85 | 6948.57 | 107.94 | 6950.62 |
| 120.3 | 6951.57 | 129.52 | 6951.73 | 150 | 6951.73 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 45.38 | .045 | 107.94 | .05 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 45.38 | 107.94 | | 39.47 | 50 | 60.56 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4250

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|-------|--------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6948.57 | 9.29 | 6948.57 | 42.5 | 6948.14 | 64.45 | 6944.4 | 72.35 | 6942.82 |
| 75 | 6942.96 | 75.29 | 6942.98 | 79.17 | 6943.16 | 89.72 | 6945.8 | 103.42 | 6949.07 |
| 109.38 | 6949.39 | 124.14 | 6949.31 | 150 | 6949.31 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 42.5 | .045 | 103.42 | .05 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 42.5 | 103.42 | | 47.28 | 50 | 53.35 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4200

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|--------|---------|-------|---------|--------|---------|
| 0 | 6947.06 | 16.62 | 6947.06 | 37.93 | 6946.33 | 57.15 | 6943.81 | 69.99 | 6941.92 |
| 73.64 | 6941.77 | 75 | 6941.74 | 77.7 | 6941.68 | 85.94 | 6943.75 | 100.62 | 6947.59 |
| 107.28 | 6947.97 | 118.1 | 6948.6 | 141.84 | 6948.75 | 150 | 6948.75 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 37.93 | .045 | 100.62 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 37.93 | 100.62 | | 34.12 | 50 | 59.42 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4150

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6946.72 | 21.81 | 6946.72 | 33.75 | 6946.21 | 44.72 | 6944.88 | 62.77 | 6942.12 |
| 71 | 6941.78 | 75 | 6941.68 | 75.99 | 6941.65 | 88.27 | 6943.68 | 99.02 | 6945.62 |
| 133.28 | 6946.17 | 148.4 | 6946.47 | 150 | 6946.47 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 33.75 | .045 | 99.02 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 33.75 | 99.02 | | 54.56 | 50 | 47.87 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4100

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6946.92 | 12.52 | 6946.92 | 26.8 | 6946.38 | 41.81 | 6945.52 | 49.62 | 6943.85 |
| 65.65 | 6940.64 | 75 | 6940.5 | 76.62 | 6940.48 | 80.6 | 6940.53 | 99.13 | 6942.25 |
| 110.21 | 6943.95 | 122.91 | 6944.07 | 136.87 | 6945.44 | 138.58 | 6945.44 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 41.81 | .045 | 110.21 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|-------|----|-------|----|----|
| 41.81 | 110.21 | 78.87 | 50 | 30.41 | .1 | .3 |
|-------|--------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4050

INPUT

Description:

Station Elevation Data num= 17

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6944.33 | 26.04 | 6944.33 | 27.03 | 6944.25 | 27.69 | 6944.25 | 31.28 | 6943.83 |
| 69.09 | 6939.89 | 69.24 | 6939.61 | 75 | 6939.61 | 78.24 | 6939.61 | 78.37 | 6939.6 |
| 78.82 | 6939.73 | 95.65 | 6943.72 | 103.92 | 6943.86 | 115.58 | 6945.3 | 119.28 | 6945.5 |
| 124.8 | 6945.27 | 136.11 | 6945.27 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 27.69 | .045 | 95.65 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|-------|-------|----|-------|----|----|
| 27.69 | 95.65 | 48.52 | 50 | 51.38 | .1 | .3 |
|-------|-------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 4000

INPUT
 Description:
 Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6944.13 | 6.34 | 6944.13 | 8.29 | 6943.89 | 23.16 | 6942.56 | 71.88 | 6938.59 |
| 75 | 6938.53 | 76.88 | 6938.49 | 77.66 | 6938.51 | 79.85 | 6939.03 | 94.21 | 6943.12 |
| 108.06 | 6943.52 | 148.53 | 6944.03 | 150 | 6944.03 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .05 | 6.34 | .045 | 94.21 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|-------|-------|----|------|----|----|
| 6.34 | 94.21 | 53.35 | 50 | 53.9 | .1 | .3 |
|------|-------|-------|----|------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3950

INPUT
 Description:
 Station Elevation Data num= 11

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6941.02 | 28.34 | 6941.02 | 73 | 6938.11 | 75.49 | 6938.03 | 75.83 | 6938.01 |
| 77.39 | 6937.94 | 81.6 | 6939.05 | 111.91 | 6941.68 | 115.43 | 6941.7 | 136.93 | 6940.99 |
| 138.53 | 6940.99 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 28.34 | .045 | 111.91 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|------|----|-------|----|----|
| 28.34 | 111.91 | 66.9 | 50 | 63.88 | .1 | .3 |
|-------|--------|------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3900

INPUT
 Description:

Station Elevation Data num= 20

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6943.22 | 2.46 | 6943.22 | 33.41 | 6939.86 | 35.37 | 6939.67 | 36.6 | 6939.52 |
| 40.25 | 6939.3 | 47.13 | 6939.08 | 82.19 | 6938.13 | 92.84 | 6937.57 | 93.35 | 6937.54 |
| 108.61 | 6937.58 | 113.66 | 6937.66 | 129.2 | 6937.61 | 148.46 | 6937.5 | 151.59 | 6937.21 |
| 153.38 | 6937.13 | 156.56 | 6937.91 | 171.58 | 6942.04 | 176.24 | 6942.19 | 190.37 | 6942.19 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .05 | 2.46 | .045 | 171.58 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|--------|-------|----|-------|----|----|
| 2.46 | 171.58 | 29.56 | 50 | 67.78 | .1 | .3 |
|------|--------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3850

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6941.79 | 3.34 | 6941.79 | 16.12 | 6941.2 | 44.4 | 6939.51 | 73.28 | 6937.89 |
| 89.2 | 6936.79 | 89.45 | 6936.8 | 103.72 | 6937.45 | 123.96 | 6937.2 | 133.88 | 6935.31 |
| 149.05 | 6939.25 | 156.89 | 6941.24 | 161.79 | 6941.24 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .05 | 3.34 | .045 | 156.89 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|--------|-------|----|-------|----|----|
| 3.34 | 156.89 | 54.23 | 50 | 63.45 | .1 | .3 |
|------|--------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3800

INPUT

Description:

Station Elevation Data num= 14

CLH14. 20_Channel . rep

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6938.59 | 23.83 | 6938.59 | 26.75 | 6938.1 | 64.69 | 6934.35 | 65 | 6934.41 |
| 72.38 | 6935.95 | 78.29 | 6937.48 | 86.93 | 6938.68 | 87.76 | 6938.73 | 89.76 | 6938.23 |
| 107.51 | 6934.66 | 127 | 6938.71 | 132.8 | 6939.83 | 140 | 6939.83 | | |

Manning's n Values

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 23.83 | .045 | 132.8 | .05 |

num= 3

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 23.83 | 132.8 | | 51.02 | 50 | 49.21 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3750

INPUT

Description:

| Station | Elevation | Data | num= | 16 | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|---------|-----------|--------|---------|--------|---------|--------|---------|-------|---------|------|-----|------|
| 0 | 6938.4 | 22.93 | 6938.4 | 39.82 | 6937.64 | 64.36 | 6934.46 | 73.46 | 6933.22 | | | |
| 73.77 | 6933.18 | 76.31 | 6933.49 | 86.66 | 6934.62 | 92.06 | 6934.61 | 95.12 | 6934.69 | | | |
| 103.76 | 6934.62 | 132.38 | 6934.34 | 155.38 | 6938.15 | 162.61 | 6939.21 | 169.1 | 6939.38 | | | |
| 170.59 | 6939.38 | | | | | | | | | | | |

Manning's n Values

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 22.93 | .045 | 162.61 | .05 |

num= 3

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 22.93 | 162.61 | | 52.26 | 50 | 46.49 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3700

INPUT

Description:

| Station | Elevation | Data | num= | 16 | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|---------|-----------|------|------|----|-----|------|-----|------|-----|------|-----|------|
| | | | | | | | | | | | | |

| | | | | | | | | | |
|--------|---------|-------|---------|--------|---------|-------|---------|--------|---------|
| 0 | 6938.69 | 13.37 | 6938.69 | 28.67 | 6938.2 | 70.27 | 6932.3 | 72.77 | 6931.91 |
| 72.8 | 6931.9 | 74.04 | 6932.1 | 88.79 | 6933.84 | 92.58 | 6934.15 | 96.39 | 6934.03 |
| 121.74 | 6933.67 | 137.6 | 6933.46 | 148.44 | 6933.23 | 164.2 | 6936.02 | 181.52 | 6938.72 |
| 185.99 | 6938.72 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 28.67 | .045 | 181.52 | .05 |

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 28.67 | 181.52 | | 60.14 | 50 | 33.53 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3650

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6937.92 | 15.4 | 6937.92 | 21.77 | 6937.78 | 43.82 | 6934.93 | 72.59 | 6931.21 |
| 72.68 | 6931.2 | 76.28 | 6931.74 | 89.29 | 6933.63 | 104.89 | 6934.34 | 113.84 | 6934.54 |
| 126.98 | 6934.36 | 154.1 | 6932.43 | 160.15 | 6933.47 | 184.83 | 6938.29 | 190.1 | 6938.29 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 21.77 | .045 | 184.83 | .05 |

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 21.77 | 184.83 | | 51.25 | 50 | 52.46 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3600

INPUT

Description:

Station Elevation Data num= 17

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-----|---------|-----|---------|-------|---------|-------|---------|------|---------|
| 0 | 6937.62 | 3.4 | 6937.62 | 12.79 | 6937.38 | 31.35 | 6936.43 | 41.1 | 6935.11 |

| | | | | | | | | | |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 72.31 | 6930.64 | 72.71 | 6930.58 | 85.12 | 6931.53 | 99.12 | 6932.37 | 109.14 | 6933.33 |
| 125.17 | 6934.55 | 145.22 | 6931.88 | 153.89 | 6930.85 | 173.12 | 6935.35 | 181.06 | 6937.1 |
| 185.24 | 6937.26 | 194.98 | 6937.26 | | | | | | |

Manning's n Values

| | | |
|--------|-------|------------|
| num= 3 | | |
| Sta | n Val | Sta n Val |
| 0 | .05 | 181.06 .05 |

| | | | | | | | | |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 0 | 181.06 | | 62.01 | 50 | 47.9 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3550

INPUT

Description:

Station Elevation Data num= 15

| | | | | | | | | | |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6935.73 | 5.33 | 6935.73 | 37.55 | 6934.96 | 49.84 | 6933.13 | 73.26 | 6929.49 |
| 73.65 | 6929.51 | 95.34 | 6930.85 | 104.54 | 6931.6 | 109.72 | 6931.57 | 122.26 | 6931.76 |
| 135.86 | 6930.75 | 147.9 | 6929.91 | 163.85 | 6933.22 | 175.35 | 6935.76 | 179.76 | 6935.76 |

Manning's n Values

| | | |
|--------|-------|-----------------------|
| num= 3 | | |
| Sta | n Val | Sta n Val |
| 0 | .05 | 37.55 .045 175.35 .05 |

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 37.55 | 175.35 | | 59.06 | 50 | 53.38 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3500

INPUT

Description:

Station Elevation Data num= 15

| | | | | | | | | | |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev |
| 0 | 6935.25 | 15.01 | 6935.25 | 28.58 | 6934.15 | 35.27 | 6933.7 | 49.03 | 6931.78 |
| 74.87 | 6928.8 | 75 | 6928.81 | 88.97 | 6930.15 | 92.89 | 6930.24 | 97.98 | 6929.93 |

111. 92 6929. 62 120. 37 6928. 86 136. 63 6932. 23 146. 26 6934. 93 150 6934. 93

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 15.01 .045 146.26 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 15.01 146.26 39.9 50 66.73 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3450

INPUT

Description:

Station Elevation Data num= 11
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6933.2 12.09 6933.2 13.53 6932.95 41.86 6930.45 64.8 6928.71
 75 6928.49 78.25 6928.42 89.89 6928.01 109.29 6933.08 109.55 6933.15
 150 6933.15

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 12.09 .045 109.55 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 12.09 109.55 24.8 50 100.26 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3400

INPUT

Description:

Station Elevation Data num= 12
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6932.69 17.69 6932.69 60.53 6928.38 63.35 6928.09 63.87 6928.07
 72.82 6927.76 80.87 6927.47 86.02 6928.04 105.87 6929.71 122.83 6930.24
 177.44 6932.03 180.28 6932.03

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 17.69 .045 177.44 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 17.69 177.44 54.43 50 48.43 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3350

INPUT

Description:

Station Elevation Data num= 15
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6932.72 3.8 6932.72 5.77 6932.69 7.36 6932.6 35.04 6931.32
 58.71 6927.57 67.53 6926.42 69.95 6926.44 73.79 6926.56 81.57 6926.79
 98.39 6928.03 119.22 6929.56 143.64 6930.24 162.24 6930.68 169.23 6930.68

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 35.04 .045 162.24 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 35.04 162.24 60.4 50 46.98 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3300

INPUT

Description:

Station Elevation Data num= 15
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6931.16 1.46 6931.16 44.98 6930.18 48.76 6929.8 64.02 6925.77
 69.23 6924.78 72.69 6924.97 73.78 6925.03 84.98 6925.91 105.49 6927.36
 128.8 6929.31 141.49 6929.55 185.07 6931.08 185.49 6931.08 192 6931.08

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val

0 .05 44.98 .045 128.8 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 44.98 128.8 56.3 50 33.79 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3250

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6929.55 | 4.97 | 6929.53 | 22.77 | 6929.02 | 50.59 | 6928.45 | 55.37 | 6927.16 |
| 70.4 | 6923.75 | 73.72 | 6924.03 | 77.53 | 6924.34 | 81.44 | 6924.74 | 88.07 | 6925.55 |
| 122.82 | 6929.1 | 123.27 | 6929.11 | 155.02 | 6929.73 | 171.66 | 6930.38 | 173.05 | 6930.38 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 50.59 | .045 | 122.82 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 50.59 122.82 48.03 50 52.79 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3200

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|-------|---------|--------|---------|
| 0 | 6928.61 | 16.79 | 6928.61 | 37.89 | 6927.96 | 47.88 | 6927.46 | 61.58 | 6925.2 |
| 70.66 | 6923.44 | 75 | 6923.29 | 75.47 | 6923.28 | 79.54 | 6923.32 | 108.39 | 6927.73 |
| 109.33 | 6927.91 | 114.48 | 6928.1 | 140.39 | 6929.05 | 150 | 6929.31 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 47.88 | .045 | 109.33 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 47.88 109.33 50.1 50 50.13 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3150

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|--------|---------|--------|---------|
| 0 | 6926.88 | 22.24 | 6926.88 | 45.77 | 6926.19 | 52.94 | 6924.92 | 62.61 | 6923.15 |
| 75 | 6923.39 | 82.58 | 6923.53 | 93.8 | 6923.61 | 101.67 | 6925.21 | 106.55 | 6926.24 |
| 133.38 | 6928.12 | 144.02 | 6928.52 | 150 | 6928.52 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 45.77 | .045 | 106.55 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 45.77 106.55 44.23 50 56.79 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3100

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6925.44 | 41.21 | 6925.44 | 42.21 | 6925.41 | 42.95 | 6925.29 | 60.07 | 6921.98 |
| 72.45 | 6922.5 | 75 | 6922.53 | 96.06 | 6922.78 | 107.62 | 6924.87 | 109.76 | 6925.31 |
| 120.75 | 6926.15 | 136.34 | 6927.41 | 138.56 | 6927.55 | 141.06 | 6927.59 | 150 | 6927.59 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 42.21 | .045 | 109.76 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 42.21 109.76 33.1 50 68.21 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3050

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|--------|---------|-------|---------|
| 0 | 6927.04 | 20.4 | 6926.3 | 37.77 | 6925.36 | 47.85 | 6924.76 | 63.81 | 6921.9 |
| 64.86 | 6921.72 | 68.48 | 6921.7 | 75 | 6921.67 | 101.35 | 6921.56 | 109.5 | 6922.78 |
| 119.15 | 6924.48 | 139.32 | 6925.18 | 150 | 6925.18 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 47.85 | .045 | 119.15 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 47.85 | 119.15 | | 67.72 | 50 | 48.85 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 3000

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6926.75 | 12.07 | 6926.75 | 30.38 | 6924.81 | 46.17 | 6923.42 | 69.32 | 6920.99 |
| 70.32 | 6920.85 | 70.81 | 6920.84 | 75 | 6920.75 | 83.92 | 6920.57 | 92.87 | 6922.59 |
| 100.45 | 6924.17 | 134.8 | 6924.77 | 150 | 6924.77 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 12.07 | .045 | 100.45 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 12.07 | 100.45 | | 64.93 | 50 | 45.01 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2950

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|-------|---------|--------|---------|--------|---------|
| 0 | 6925.81 | 18.13 | 6925.81 | 19.68 | 6925.79 | 20.08 | 6925.76 | 21.08 | 6925.7 |
| 40.93 | 6924.34 | 62.31 | 6920.25 | 64.23 | 6919.84 | 65.4 | 6919.86 | 73.12 | 6919.94 |
| 79.78 | 6920.01 | 89.4 | 6921.77 | 95.22 | 6922.65 | 166.18 | 6924.46 | 175.43 | 6924.7 |
| 179.51 | 6924.7 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 40.93 | .045 | 95.22 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 40.93 | 95.22 | | 50.79 | 50 | 51.25 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2900

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6924.92 | 20.3 | 6924.92 | 22.17 | 6924.89 | 24.13 | 6924.76 | 41.82 | 6923.67 |
| 59.09 | 6919.82 | 61.33 | 6919.34 | 64.69 | 6919.34 | 73.26 | 6919.33 | 82.61 | 6919.31 |
| 94.28 | 6920.95 | 99 | 6921.46 | 183.37 | 6923.45 | 185.87 | 6923.45 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-----|-------|
| 0 | .05 | 41.82 | .045 | 99 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 41.82 | 99 | | 65.91 | 50 | 45.14 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2850

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6923.53 | 14.01 | 6923.53 | 32.65 | 6922.77 | 47.73 | 6922.24 | 62.37 | 6918.47 |
| 64.37 | 6917.96 | 70.64 | 6918.05 | 72.59 | 6918.07 | 78.56 | 6918.13 | 84.89 | 6918.97 |
| 98.45 | 6920.68 | 118.89 | 6921.29 | 188.61 | 6923.26 | 189.28 | 6923.26 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 14.01 | .045 | 118.89 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 14.01 | 118.89 | | 66.73 | 50 | 53.41 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2800

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6922.35 | 10.49 | 6922.35 | 37.01 | 6921.12 | 54.97 | 6920.34 | 63.84 | 6917.94 |
| 66.89 | 6917.16 | 75 | 6917.29 | 81.41 | 6917.39 | 81.5 | 6917.39 | 81.68 | 6917.42 |
| 98.3 | 6920.39 | 144.82 | 6921.51 | 150 | 6921.51 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|------|-------|
| 0 | .05 | 54.97 | .045 | 98.3 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 54.97 | 98.3 | | 67.78 | 50 | 48.95 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel

REACH: East RS: 2750

INPUT

Description:

Station Elevation Data num= 12

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6920.98 | 8.09 | 6920.98 | 32.07 | 6919.62 | 49.48 | 6918.77 | 61.26 | 6917.17 |
| 64.88 | 6916.55 | 75 | 6915.94 | 75.38 | 6915.92 | 78.15 | 6915.84 | 83.39 | 6917.25 |
| 92.71 | 6919.98 | 150 | 6919.98 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .05 | 8.09 | .045 | 92.71 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|-------|-------|----|-------|----|----|
| 8.09 | 92.71 | 45.41 | 50 | 50.66 | .1 | .3 |
|------|-------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
REACH: East RS: 2700

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6919.86 | 10.07 | 6919.86 | 28.38 | 6918.78 | 49.99 | 6917.31 | 60.09 | 6916.05 |
| 67.57 | 6915.26 | 70.91 | 6915.09 | 75 | 6914.88 | 77.09 | 6914.78 | 83.92 | 6917.05 |
| 90.44 | 6919.08 | 131.67 | 6919.81 | 150 | 6919.81 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 10.07 | .045 | 90.44 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|-------|------|----|-------|----|----|
| 10.07 | 90.44 | 62.4 | 50 | 52.53 | .1 | .3 |
|-------|-------|------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
REACH: East RS: 2650

INPUT
 Description:
 Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|--------|---------|-------|---------|-------|---------|
| 0 | 6919.1 | 8.33 | 6919.1 | 17.17 | 6918.81 | 23.07 | 6918.56 | 53.21 | 6917.64 |
| 56.81 | 6916.91 | 68.79 | 6914.18 | 72.13 | 6913.94 | 75 | 6913.83 | 78.45 | 6913.71 |
| 89.72 | 6916.51 | 95.1 | 6918.05 | 106.86 | 6918.14 | 150 | 6918.14 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|------|-------|
| 0 | .05 | 53.21 | .045 | 95.1 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|------|------|----|-------|----|----|
| 53.21 | 95.1 | 54.3 | 50 | 79.13 | .1 | .3 |
|-------|------|------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2600

INPUT
 Description:
 Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|-------|---------|--------|---------|--------|--------|
| 0 | 6918.03 | 15.61 | 6918.03 | 18.34 | 6917.93 | 20.86 | 6917.82 | 26.37 | 6917.5 |
| 46.83 | 6916.29 | 48.34 | 6915.95 | 62 | 6913.18 | 68.32 | 6912.98 | 71.23 | 6912.9 |
| 73.59 | 6912.84 | 82.87 | 6915.73 | 87.16 | 6916.8 | 113.27 | 6916.84 | 164.93 | 6917.5 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 46.83 | .045 | 87.16 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|-------|-------|----|-------|----|----|
| 46.83 | 87.16 | 60.01 | 50 | 72.05 | .1 | .3 |
|-------|-------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2550

INPUT
 Description:

Station Elevation Data num= 18

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6917.98 | 16.03 | 6917.98 | 30.3 | 6917.37 | 33.44 | 6916.28 | 39.01 | 6915.48 |
| 47.77 | 6914.45 | 64.51 | 6912.49 | 71.43 | 6912.49 | 71.67 | 6912.49 | 75.28 | 6912.38 |
| 89.77 | 6914.65 | 90.88 | 6914.77 | 108.35 | 6915.07 | 144.31 | 6915.68 | 157.36 | 6915.97 |
| 178.95 | 6916.25 | 199.36 | 6916.51 | 211.51 | 6916.51 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 47.77 | .045 | 108.35 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|-------|----|------|----|----|
| 47.77 | 108.35 | 65.45 | 50 | 93.8 | .1 | .3 |
|-------|--------|-------|----|------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2500

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6917.34 | 21.33 | 6917.34 | 43.19 | 6915.76 | 50.05 | 6915.24 | 58.83 | 6913.21 |
| 65.27 | 6911.7 | 72.35 | 6911.56 | 73.69 | 6911.54 | 75.82 | 6911.56 | 81.29 | 6912.14 |
| 96.3 | 6913.77 | 116.43 | 6914.35 | 183.46 | 6915.89 | 185.27 | 6915.89 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 21.33 | .045 | 183.46 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|-------|----|------|----|----|
| 21.33 | 183.46 | 69.23 | 50 | 85.3 | .1 | .3 |
|-------|--------|-------|----|------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2450

INPUT

Description:

Station Elevation Data num= 13

CLH14. 20_Channel . rep

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6914.52 | .64 | 6914.52 | 46.94 | 6913.89 | 51.13 | 6913.72 | 53.31 | 6913.16 |
| 67.55 | 6910.62 | 75 | 6910.7 | 78.02 | 6910.73 | 79.98 | 6910.73 | 98.22 | 6913.34 |
| 98.49 | 6913.37 | 134.64 | 6914.39 | 150 | 6914.39 | | | | |

Manning's n Values

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 46.94 | .045 | 98.49 | .05 |

num= 3

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 46.94 | 98.49 | | 38.25 | 50 | 54.23 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2400

INPUT

Description:

Station Elevation Data

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|------|---------|-------|---------|-------|---------|
| 0 | 6913.88 | .43 | 6913.88 | 22.4 | 6913.14 | 42.22 | 6912.55 | 51.23 | 6911.52 |
| 66.38 | 6909.67 | 72.38 | 6908.29 | 75 | 6907.83 | 75.12 | 6907.81 | 79.67 | 6909.31 |
| 90.18 | 6912.93 | 130.62 | 6913.82 | 150 | 6913.82 | | | | |

num= 13

Manning's n Values

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 42.22 | .045 | 90.18 | .05 |

num= 3

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 42.22 | 90.18 | | 62.04 | 50 | 59.15 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2350

INPUT

Description:

Station Elevation Data

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-----|--------|-------|--------|-------|---------|-------|---------|-------|---------|
| 0 | 6913.3 | 15.78 | 6913.3 | 61.91 | 6911.47 | 66.32 | 6911.31 | 76.86 | 6910.37 |

num= 14

95.48 6908.73 100.28 6908.56 101.17 6908.5 104.23 6908.31 110.73 6909.36
 126.12 6911.75 135.5 6912.03 171.12 6912.6 174.35 6912.6

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 15.78 .045 135.5 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 15.78 135.5 50.75 50 50.85 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2300

INPUT

Description:

Station Elevation Data num= 18
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6911.72 22.76 6911.72 33.65 6911.34 69.33 6910.1 78.94 6909.72
 85.8 6908.79 90.2 6908.18 100.69 6908.29 102.97 6908.31 116.1 6908.44
 121.54 6909.11 135.6 6911.06 146.49 6911.35 179.8 6912.22 187.16 6912.38
 192.88 6912.56 216.57 6912.97 229 6912.97

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 78.94 .045 135.6 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 78.94 135.6 40.98 50 54.76 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2250

INPUT

Description:

Station Elevation Data num= 13
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6910.61 1.56 6910.61 23.77 6909.76 50.13 6908.84 60.48 6907.4
 61.16 6907.31 62.7 6907.3 75 6907.38 89 6907.46 92.6 6908.02

107.95 6910.49 119.02 6910.41 150 6910.41

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 1.56 .045 107.95 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 1.56 107.95 49.97 50 49.41 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2200

INPUT

Description:

Station Elevation Data num= 13
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6910.07 8.28 6910.07 13.9 6909.74 24.43 6909.15 45.28 6908.07
 57.94 6906.38 59.54 6906.18 61.87 6906.21 75 6906.3 88.29 6906.39
 94.06 6907.33 109.9 6910.46 150 6910.46

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 8.28 .045 109.9 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 8.28 109.9 53.67 50 48.88 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2150

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6909.25 5.2 6909.25 19.11 6908.3 32.48 6907.46 50.08 6905.59
 53.71 6905.09 59.94 6905.13 75 6905.29 92.37 6905.47 103.43 6907.89
 118.11 6910.41 137.07 6910.55 144.67 6910.76 150 6910.76

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 5.2 .045 118.11 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 5.2 118.11 34.58 50 63.09 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2100

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6908.5 6.15 6908.5 10.02 6908.21 19.07 6907.14 26.74 6906.22
 32.27 6905.66 49.04 6903.79 75 6904.43 88.43 6904.77 103.66 6905.1
 122.34 6909.12 127.5 6909.92 143.26 6910.52 150 6910.52

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 6.15 .045 127.5 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 6.15 127.5 31.66 50 64.9 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2050

INPUT

Description:

Station Elevation Data num= 13
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6907.45 9.89 6907.45 17.07 6906.74 23.21 6905.85 42.66 6903.64
 45.68 6903.25 75 6903.71 98.82 6904.09 109.01 6904.25 110.23 6904.49
 132.05 6908.89 142 6909.17 150 6909.17

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val

0 .05 9.89 .045 132.05 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 9.89 132.05 49.84 50 49.41 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 2000

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|--------|---------|--------|---------|
| 0 | 6906.54 | 9.47 | 6906.54 | 20.03 | 6905.52 | 29.79 | 6904.81 | 44.84 | 6903.15 |
| 46.69 | 6902.93 | 50.42 | 6902.97 | 75 | 6903.16 | 111.98 | 6903.44 | 122.44 | 6905.66 |
| 132.44 | 6907.76 | 144.92 | 6907.83 | 150 | 6907.83 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .05 | 9.47 | .045 | 132.44 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 9.47 132.44 47.64 50 56.5 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1950

INPUT

Description:

Station Elevation Data num= 14

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6906.83 | 2.6 | 6906.83 | 24.26 | 6906.52 | 57.8 | 6904.5 | 68.74 | 6903.96 |
| 75.6 | 6903.31 | 86.59 | 6902.27 | 110.3 | 6902.52 | 134.76 | 6902.78 | 138.55 | 6902.8 |
| 144.24 | 6903.49 | 165.28 | 6905.85 | 170.19 | 6906.05 | 182.84 | 6906.05 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 24.26 | .045 | 170.19 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 24. 26 170. 19 52. 36 50 54. 3 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1900

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6906.08 | 5.45 | 6906.08 | 18.2 | 6905.94 | 28.51 | 6905.83 | 53.96 | 6904.57 |
| 81.9 | 6902.98 | 82.53 | 6902.93 | 98.87 | 6901.84 | 114.34 | 6901.8 | 127.32 | 6901.77 |
| 130.99 | 6901.8 | 137.41 | 6902.43 | 143.62 | 6903.03 | 173.17 | 6905.83 | 186.59 | 6905.83 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 28.51 | .045 | 173.17 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 28. 51 173. 17 63. 75 50 36. 61 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1850

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6904.47 | 10.75 | 6904.47 | 13.78 | 6904.31 | 33.62 | 6903.13 | 51.09 | 6902.12 |
| 52.48 | 6901.98 | 61.55 | 6901.26 | 75 | 6901.25 | 81.26 | 6901.25 | 88.3 | 6901.2 |
| 104.78 | 6902.72 | 137.72 | 6905.89 | 150 | 6905.89 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 10.75 | .045 | 137.72 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 10. 75 137. 72 61. 98 50 38. 16 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1800

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 14 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6903.01 | 10.31 | 6903.01 | 20.44 | 6902.68 | 47.13 | 6901.17 | 48.74 | 6901.04 |
| 58.16 | 6900.25 | 69.18 | 6900.3 | 75 | 6900.32 | 93.92 | 6900.39 | 132.45 | 6905.6 |
| 133.42 | 6905.71 | 133.78 | 6905.72 | 148.41 | 6905.96 | 150 | 6905.96 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 10.31 | .045 | 133.78 | .05 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 10.31 | 133.78 | | 50.79 | 50 | 53.54 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1750

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 21 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6903.28 | 1.47 | 6903.28 | 3.64 | 6903.26 | 15.26 | 6902.98 | 16.04 | 6902.96 |
| 51.67 | 6902.08 | 60.78 | 6901.9 | 64.92 | 6901.8 | 92.65 | 6900.99 | 104.5 | 6900.66 |
| 106.01 | 6900.54 | 119.29 | 6899.84 | 139.25 | 6899.82 | 140.69 | 6899.82 | 159.99 | 6899.76 |
| 164.67 | 6899.75 | 195.04 | 6904.47 | 196.26 | 6904.65 | 197.05 | 6904.67 | 212.31 | 6904.88 |
| 212.46 | 6904.88 | | | | | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 15.26 | .045 | 196.26 | .05 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 15.26 | 196.26 | | 61.55 | 50 | 50.72 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1700

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 20 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6903 | .45 | 6903 | 3.91 | 6902.88 | 31.82 | 6901.95 | 34.62 | 6901.88 |
| 36.89 | 6901.82 | 115.47 | 6900.28 | 119.22 | 6900.19 | 123.6 | 6899.98 | 140.07 | 6899.58 |
| 161.01 | 6899.71 | 163.07 | 6899.72 | 182.45 | 6899.75 | 186.05 | 6899.76 | 214.78 | 6903.01 |
| 215.32 | 6903.07 | 215.47 | 6903.08 | 234.71 | 6903.44 | 269.69 | 6904.2 | 276.85 | 6904.2 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 3.91 | .045 | 215.47 | .05 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 3.91 | 215.47 | | 28.94 | 50 | 59.09 | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1650

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 24 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6902.16 | 4.27 | 6902.16 | 6.93 | 6902.4 | 12.64 | 6902.49 | 15.67 | 6902.55 |
| 21.47 | 6902.35 | 25.2 | 6902.23 | 52.02 | 6901.33 | 103.14 | 6900.15 | 118.47 | 6899.75 |
| 142.92 | 6898.99 | 157.7 | 6899.12 | 160.56 | 6899.28 | 174.94 | 6899.63 | 175.17 | 6899.63 |
| 188.88 | 6899.92 | 189.58 | 6899.93 | 197.96 | 6899.52 | 201.38 | 6899.35 | 218.42 | 6901.04 |
| 224.9 | 6901.7 | 228.87 | 6901.79 | 281.79 | 6902.4 | 295.03 | 6902.4 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 15.67 | .045 | 224.9 | .05 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | | | | | | | | |

15. 67 224. 9 50. 13 50 73. 62 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1600

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6901.59 | 2.06 | 6901.59 | 7.04 | 6901.57 | 15.57 | 6901.33 | 43.98 | 6900.34 |
| 66.12 | 6899.74 | 74.32 | 6899.49 | 118.46 | 6899.89 | 145.39 | 6899.62 | 166.55 | 6899.4 |
| 180.14 | 6898.93 | 185.57 | 6898.29 | 201.22 | 6899.59 | 206.55 | 6899.96 | 252.15 | 6900.82 |
| 254.18 | 6900.88 | 255.31 | 6900.91 | 259.84 | 6900.91 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .05 | 7.04 | .045 | 254.18 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|--------|------|----|-------|----|----|
| 7.04 | 254.18 | 77.3 | 50 | 30.02 | .1 | .3 |
|------|--------|------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1550

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6900.06 | 4.45 | 6900.06 | 9.08 | 6900.11 | 32.59 | 6899.49 | 43.11 | 6899.21 |
| 85.62 | 6898.17 | 136.71 | 6897.97 | 148.44 | 6897.92 | 152.79 | 6897.91 | 154.06 | 6897.87 |
| 157.25 | 6897.99 | 202.23 | 6899.17 | 208.34 | 6899.21 | 236.29 | 6900.05 | 262.22 | 6900.88 |
| 275.94 | 6900.88 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .05 | 9.08 | .045 | 262.22 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|--|--|--|--|--|--|--|
| | | | | | | |
|--|--|--|--|--|--|--|

9.08 262.22 50.69 50 49.44 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1500

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6899.23 | 10.45 | 6898.71 | 16.94 | 6898.13 | 54.66 | 6897.28 | 72.38 | 6897.55 |
| 92.11 | 6897.48 | 108.73 | 6897.41 | 135.95 | 6897.51 | 142.61 | 6897.58 | 144.79 | 6897.6 |
| 172.75 | 6898.08 | 172.79 | 6898.08 | 180.01 | 6898.25 | 214.74 | 6899.1 | 227.93 | 6899.3 |
| 259.53 | 6900.29 | 259.56 | 6900.29 | 266.11 | 6900.29 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-----|-------|--------|-------|
| 0 | .05 | 0 | .045 | 259.53 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|---|--------|-------|----|-------|----|----|
| 0 | 259.53 | 65.39 | 50 | 50.26 | .1 | .3 |
|---|--------|-------|----|-------|----|----|

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1450

INPUT

Description:

Station Elevation Data num= 25

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6897.19 | 2.4 | 6897.19 | 7.1 | 6897.19 | 9.98 | 6897.11 | 13.15 | 6897.51 |
| 28.03 | 6897.92 | 30.39 | 6897.92 | 33.72 | 6897.79 | 64.2 | 6896.43 | 97.65 | 6897 |
| 111.18 | 6897.22 | 136.14 | 6897.73 | 136.58 | 6897.73 | 136.63 | 6897.73 | 137.26 | 6897.73 |
| 179.1 | 6896.36 | 180.44 | 6896.37 | 183.9 | 6896.41 | 185.63 | 6896.94 | 208.58 | 6897.29 |
| 258.32 | 6899.12 | 259.97 | 6899.22 | 265.98 | 6899.49 | 280.35 | 6899.49 | 302.4 | 6899.49 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 30.39 | .045 | 265.98 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 30. 39 265. 98 109. 19 50 50. 75 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1400

INPUT

Description:

Station Elevation Data num= 23

| Sta | Elev |
|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| 0 | 6895. 61 | . 12 | 6895. 61 | 36. 32 | 6896. 21 | 53. 71 | 6896. 47 | 75. 26 | 6897. 27 |
| 76. 03 | 6897. 29 | 76. 07 | 6897. 29 | 91. 24 | 6896. 72 | 97. 25 | 6896. 52 | 100. 08 | 6895. 77 |
| 125. 33 | 6894. 94 | 129. 54 | 6894. 98 | 135. 84 | 6895. 04 | 139. 62 | 6896. 21 | 153. 34 | 6896. 42 |
| 183. 07 | 6897. 51 | 193. 08 | 6898. 17 | 218. 95 | 6899. 32 | 220. 94 | 6899. 32 | 222. 25 | 6899. 32 |
| 229. 54 | 6899. 61 | 237. 52 | 6899. 45 | 241. 42 | 6899. 45 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|--------|-------|---------|-------|
| 0 | . 05 | 76. 07 | . 045 | 218. 95 | . 05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 76. 07 218. 95 51. 77 50 59. 74 . 1 . 3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1350

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|---------|----------|---------|----------|---------|----------|--------|----------|---------|----------|
| 0 | 6897. 05 | . 01 | 6897. 05 | 6. 43 | 6895. 86 | 11. 05 | 6895. 69 | 23. 15 | 6895. 3 |
| 28. 83 | 6893. 78 | 36. 57 | 6893. 53 | 43. 63 | 6893. 6 | 52. 76 | 6893. 68 | 58. 59 | 6895. 48 |
| 63. 1 | 6895. 55 | 72. 88 | 6895. 91 | 91. 22 | 6897. 11 | 100. 4 | 6897. 52 | 111. 21 | 6897. 52 |
| 118. 27 | 6897. 5 | 140. 44 | 6898. 4 | 156. 39 | 6898. 4 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-----|-------|--------|-------|
| 0 | . 05 | 0 | . 045 | 100. 4 | . 05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 0 100.4 44.72 50 60.04 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1300

INPUT

Description:

Station Elevation Data num= 23

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6895.69 | 2.98 | 6895.69 | 11.3 | 6896.14 | 21.38 | 6895.92 | 37.79 | 6893.21 |
| 45.21 | 6891.73 | 57.32 | 6891.49 | 62.54 | 6889.74 | 62.55 | 6889.74 | 66.21 | 6889.28 |
| 69.25 | 6889.35 | 75 | 6889.28 | 85.9 | 6889.13 | 91.38 | 6892.02 | 96.92 | 6892.54 |
| 127.41 | 6893.56 | 129.81 | 6893.59 | 137.69 | 6895.62 | 140.07 | 6895.68 | 144.43 | 6895.79 |
| 146.08 | 6895.8 | 147.85 | 6896.16 | 150 | 6896.16 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .05 | 21.38 | .045 | 137.69 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 21.38 137.69 53.12 50 50.07 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1250

INPUT

Description:

Station Elevation Data num= 21

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|-------|---------|--------|---------|
| 0 | 6894.47 | 2.29 | 6894.47 | 7.64 | 6894.85 | 25.6 | 6893.42 | 34.28 | 6893.23 |
| 42.32 | 6891.9 | 45.96 | 6891.17 | 51.88 | 6891.06 | 54.44 | 6890.2 | 54.45 | 6890.2 |
| 65.86 | 6888.78 | 75 | 6888.97 | 75.36 | 6888.98 | 85.1 | 6888.85 | 88.31 | 6890.54 |
| 104.84 | 6892.1 | 123.12 | 6892.71 | 129.88 | 6892.8 | 134.6 | 6894.01 | 141.16 | 6894.17 |
| 150 | 6894.17 | | | | | | | | |

Manning's n Values num= 3

Sta n Val Sta n Val Sta n Val
 0 .05 7.64 .045 134.6 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 7.64 134.6 56.63 50 49.44 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1200

INPUT

Description:

Station Elevation Data num= 21

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|-------|---------|--------|---------|
| 0 | 6892.64 | 36.66 | 6892.64 | 38.75 | 6892.52 | 40.72 | 6892.49 | 42.5 | 6891.63 |
| 42.59 | 6889.77 | 45.59 | 6890.58 | 47.79 | 6890.64 | 47.8 | 6890.64 | 48.4 | 6890.41 |
| 65.51 | 6888.27 | 75 | 6888.47 | 81.47 | 6888.61 | 84.3 | 6888.57 | 85.23 | 6889.07 |
| 112.76 | 6891.66 | 118.83 | 6891.86 | 129.94 | 6892 | 131.5 | 6892.4 | 142.26 | 6892.66 |
| 150 | 6892.66 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .05 | 36.66 | .045 | 131.5 | .05 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 36.66 131.5 46.46 50 82.68 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1150

INPUT

Description:

Station Elevation Data num= 19

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6894.07 | 2.72 | 6894.07 | 9.98 | 6893.64 | 21.21 | 6891.55 | 25.74 | 6891.01 |
| 35.28 | 6889.26 | 55.82 | 6886.35 | 62.27 | 6885.25 | 67.09 | 6885.33 | 72.87 | 6885.38 |
| 82.05 | 6885.45 | 123.13 | 6886.62 | 131.01 | 6888.31 | 159.52 | 6889.99 | 175.93 | 6890.37 |
| 182.4 | 6890.4 | 182.62 | 6890.41 | 183.5 | 6890.43 | 186.85 | 6890.43 | | |

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 9.98 .045 175.93 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 9.98 175.93 49.8 50 49.97 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1100

INPUT

Description:

Station Elevation Data num= 17
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6893.38 7.97 6893.47 11.03 6893.11 43.57 6887.14 55.97 6885.38
 59.86 6884.72 72.02 6884.92 74.21 6884.96 82.63 6885.03 105.76 6885.69
 124.96 6889.81 142.19 6890.83 178.29 6891.67 192.54 6891.73 193.02 6891.75
 194.96 6891.8 199.21 6891.8

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .05 7.97 .045 178.29 .05

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 7.97 178.29 50.13 50 72.83 .1 .3

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1050

INPUT

Description:

Station Elevation Data num= 16
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6892.05 10.03 6892.05 13.94 6892.08 15.76 6892.37 40.21 6887.63
 40.39 6887.58 54.33 6885.03 58.63 6884.41 59.99 6884.18 73.7 6884.42
 83.82 6884.59 85.74 6884.61 91.01 6884.76 121.46 6891.3 127.47 6891.66
 171.48 6891.66

| Manning's n Values | | | num= 3 | | |
|--------------------|-------|-------|--------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 15.76 | .045 | 127.47 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 15.76 | 127.47 | | 72.28 | 50 | | .1 | .3 |

CROSS SECTION

RIVER: Existing Channel
 REACH: East RS: 1000

INPUT

Description:

| Station Elevation Data | | num= 26 | | | | | | | |
|------------------------|---------|---------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6891.26 | 5.44 | 6891.26 | 11.48 | 6891.3 | 19.25 | 6891.2 | 19.5 | 6891.76 |
| 19.5 | 6891.74 | 19.58 | 6891.76 | 26.72 | 6892.42 | 26.75 | 6892.42 | 26.76 | 6892.42 |
| 31.73 | 6892.62 | 38.17 | 6892.85 | 39.06 | 6892.87 | 53.88 | 6890.92 | 62.2 | 6883.33 |
| 75.01 | 6883.38 | 76.97 | 6883.39 | 89.26 | 6887.7 | 96.33 | 6893.15 | 97.62 | 6892.7 |
| 104.25 | 6892.35 | 105.39 | 6892.98 | 105.63 | 6892.96 | 106.44 | 6892.9 | 107.05 | 6892.85 |
| 150.01 | 6892.85 | | | | | | | | |

| Manning's n Values | | | num= 3 | | |
|--------------------|-------|-------|--------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .05 | 39.06 | .045 | 96.33 | .05 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 39.06 | 96.33 | | 0 | 0 | | .1 | .3 |

SUMMARY OF MANNING'S N VALUES

River: Existing Channel

| Reach | River Sta. | n1 | n2 | n3 |
|-------|------------|-----|------|-----|
| East | 5000 | .05 | .045 | .05 |
| East | 4950 | .05 | .045 | .05 |
| East | 4900 | .05 | .045 | .05 |
| East | 4850 | .05 | .045 | .05 |
| East | 4800 | .05 | .045 | .05 |

| | | | | |
|------|------|-----|------|-----|
| East | 4750 | .05 | .045 | .05 |
| East | 4700 | .05 | .045 | .05 |
| East | 4650 | .05 | .045 | .05 |
| East | 4600 | .05 | .045 | .05 |
| East | 4550 | .05 | .045 | .05 |
| East | 4500 | .05 | .045 | .05 |
| East | 4450 | .05 | .045 | .05 |
| East | 4400 | .05 | .045 | .05 |
| East | 4350 | .05 | .045 | .05 |
| East | 4300 | .05 | .045 | .05 |
| East | 4250 | .05 | .045 | .05 |
| East | 4200 | .05 | .045 | .05 |
| East | 4150 | .05 | .045 | .05 |
| East | 4100 | .05 | .045 | .05 |
| East | 4050 | .05 | .045 | .05 |
| East | 4000 | .05 | .045 | .05 |
| East | 3950 | .05 | .045 | .05 |
| East | 3900 | .05 | .045 | .05 |
| East | 3850 | .05 | .045 | .05 |
| East | 3800 | .05 | .045 | .05 |
| East | 3750 | .05 | .045 | .05 |
| East | 3700 | .05 | .045 | .05 |
| East | 3650 | .05 | .045 | .05 |
| East | 3600 | .05 | .045 | .05 |
| East | 3550 | .05 | .045 | .05 |
| East | 3500 | .05 | .045 | .05 |
| East | 3450 | .05 | .045 | .05 |
| East | 3400 | .05 | .045 | .05 |
| East | 3350 | .05 | .045 | .05 |
| East | 3300 | .05 | .045 | .05 |
| East | 3250 | .05 | .045 | .05 |
| East | 3200 | .05 | .045 | .05 |
| East | 3150 | .05 | .045 | .05 |
| East | 3100 | .05 | .045 | .05 |
| East | 3050 | .05 | .045 | .05 |
| East | 3000 | .05 | .045 | .05 |
| East | 2950 | .05 | .045 | .05 |
| East | 2900 | .05 | .045 | .05 |
| East | 2850 | .05 | .045 | .05 |
| East | 2800 | .05 | .045 | .05 |
| East | 2750 | .05 | .045 | .05 |
| East | 2700 | .05 | .045 | .05 |
| East | 2650 | .05 | .045 | .05 |
| East | 2600 | .05 | .045 | .05 |

| | | | | |
|------|------|-----|------|-----|
| East | 2550 | .05 | .045 | .05 |
| East | 2500 | .05 | .045 | .05 |
| East | 2450 | .05 | .045 | .05 |
| East | 2400 | .05 | .045 | .05 |
| East | 2350 | .05 | .045 | .05 |
| East | 2300 | .05 | .045 | .05 |
| East | 2250 | .05 | .045 | .05 |
| East | 2200 | .05 | .045 | .05 |
| East | 2150 | .05 | .045 | .05 |
| East | 2100 | .05 | .045 | .05 |
| East | 2050 | .05 | .045 | .05 |
| East | 2000 | .05 | .045 | .05 |
| East | 1950 | .05 | .045 | .05 |
| East | 1900 | .05 | .045 | .05 |
| East | 1850 | .05 | .045 | .05 |
| East | 1800 | .05 | .045 | .05 |
| East | 1750 | .05 | .045 | .05 |
| East | 1700 | .05 | .045 | .05 |
| East | 1650 | .05 | .045 | .05 |
| East | 1600 | .05 | .045 | .05 |
| East | 1550 | .05 | .045 | .05 |
| East | 1500 | .05 | .045 | .05 |
| East | 1450 | .05 | .045 | .05 |
| East | 1400 | .05 | .045 | .05 |
| East | 1350 | .05 | .045 | .05 |
| East | 1300 | .05 | .045 | .05 |
| East | 1250 | .05 | .045 | .05 |
| East | 1200 | .05 | .045 | .05 |
| East | 1150 | .05 | .045 | .05 |
| East | 1100 | .05 | .045 | .05 |
| East | 1050 | .05 | .045 | .05 |
| East | 1000 | .05 | .045 | .05 |

SUMMARY OF REACH LENGTHS

River: Existing Channel

| Reach | River Sta. | Left | Channel | Right |
|-------|------------|-------|---------|-------|
| East | 5000 | 53.22 | 50 | 51.12 |
| East | 4950 | 56.3 | 50 | 55.05 |

| | | | | |
|------|------|--------|----|---------|
| East | 4900 | 71. 1 | 50 | 38. 94 |
| East | 4850 | 49. 15 | 50 | 56. 56 |
| East | 4800 | 61. 25 | 50 | 43. 37 |
| East | 4750 | 62. 73 | 50 | 41. 17 |
| East | 4700 | 48. 59 | 50 | 53. 31 |
| East | 4650 | 31. 33 | 50 | 63. 68 |
| East | 4600 | 31. 96 | 50 | 60. 47 |
| East | 4550 | 69. 03 | 50 | 28. 51 |
| East | 4500 | 50. 62 | 50 | 52. 59 |
| East | 4450 | 46. 56 | 50 | 51. 87 |
| East | 4400 | 61. 22 | 50 | 41. 17 |
| East | 4350 | 50. 69 | 50 | 48. 39 |
| East | 4300 | 39. 47 | 50 | 60. 56 |
| East | 4250 | 47. 28 | 50 | 53. 35 |
| East | 4200 | 34. 12 | 50 | 59. 42 |
| East | 4150 | 54. 56 | 50 | 47. 87 |
| East | 4100 | 78. 87 | 50 | 30. 41 |
| East | 4050 | 48. 52 | 50 | 51. 38 |
| East | 4000 | 53. 35 | 50 | 53. 9 |
| East | 3950 | 66. 9 | 50 | 63. 88 |
| East | 3900 | 29. 56 | 50 | 67. 78 |
| East | 3850 | 54. 23 | 50 | 63. 45 |
| East | 3800 | 51. 02 | 50 | 49. 21 |
| East | 3750 | 52. 26 | 50 | 46. 49 |
| East | 3700 | 60. 14 | 50 | 33. 53 |
| East | 3650 | 51. 25 | 50 | 52. 46 |
| East | 3600 | 62. 01 | 50 | 47. 9 |
| East | 3550 | 59. 06 | 50 | 53. 38 |
| East | 3500 | 39. 9 | 50 | 66. 73 |
| East | 3450 | 24. 8 | 50 | 100. 26 |
| East | 3400 | 54. 43 | 50 | 48. 43 |
| East | 3350 | 60. 4 | 50 | 46. 98 |
| East | 3300 | 56. 3 | 50 | 33. 79 |
| East | 3250 | 48. 03 | 50 | 52. 79 |
| East | 3200 | 50. 1 | 50 | 50. 13 |
| East | 3150 | 44. 23 | 50 | 56. 79 |
| East | 3100 | 33. 1 | 50 | 68. 21 |
| East | 3050 | 67. 72 | 50 | 48. 85 |
| East | 3000 | 64. 93 | 50 | 45. 01 |
| East | 2950 | 50. 79 | 50 | 51. 25 |
| East | 2900 | 65. 91 | 50 | 45. 14 |
| East | 2850 | 66. 73 | 50 | 53. 41 |
| East | 2800 | 67. 78 | 50 | 48. 95 |
| East | 2750 | 45. 41 | 50 | 50. 66 |

| | | | | |
|------|------|--------|----|-------|
| East | 2700 | 62.4 | 50 | 52.53 |
| East | 2650 | 54.3 | 50 | 79.13 |
| East | 2600 | 60.01 | 50 | 72.05 |
| East | 2550 | 65.45 | 50 | 93.8 |
| East | 2500 | 69.23 | 50 | 85.3 |
| East | 2450 | 38.25 | 50 | 54.23 |
| East | 2400 | 62.04 | 50 | 59.15 |
| East | 2350 | 50.75 | 50 | 50.85 |
| East | 2300 | 40.98 | 50 | 54.76 |
| East | 2250 | 49.97 | 50 | 49.41 |
| East | 2200 | 53.67 | 50 | 48.88 |
| East | 2150 | 34.58 | 50 | 63.09 |
| East | 2100 | 31.66 | 50 | 64.9 |
| East | 2050 | 49.84 | 50 | 49.41 |
| East | 2000 | 47.64 | 50 | 56.5 |
| East | 1950 | 52.36 | 50 | 54.3 |
| East | 1900 | 63.75 | 50 | 36.61 |
| East | 1850 | 61.98 | 50 | 38.16 |
| East | 1800 | 50.79 | 50 | 53.54 |
| East | 1750 | 61.55 | 50 | 50.72 |
| East | 1700 | 28.94 | 50 | 59.09 |
| East | 1650 | 50.13 | 50 | 73.62 |
| East | 1600 | 77.3 | 50 | 30.02 |
| East | 1550 | 50.69 | 50 | 49.44 |
| East | 1500 | 65.39 | 50 | 50.26 |
| East | 1450 | 109.19 | 50 | 50.75 |
| East | 1400 | 51.77 | 50 | 59.74 |
| East | 1350 | 44.72 | 50 | 60.04 |
| East | 1300 | 53.12 | 50 | 50.07 |
| East | 1250 | 56.63 | 50 | 49.44 |
| East | 1200 | 46.46 | 50 | 82.68 |
| East | 1150 | 49.8 | 50 | 49.97 |
| East | 1100 | 50.13 | 50 | 72.83 |
| East | 1050 | 72.28 | 50 | 51.48 |
| East | 1000 | 0 | 0 | 0 |

SUMMARY OF CONTRACTION AND EXPANSION COEFFICIENTS

River: Existing Channel

Reach River Sta. Contr. Expan.

| | | | |
|------|------|----|----|
| East | 5000 | .1 | .3 |
| East | 4950 | .1 | .3 |
| East | 4900 | .1 | .3 |
| East | 4850 | .1 | .3 |
| East | 4800 | .1 | .3 |
| East | 4750 | .1 | .3 |
| East | 4700 | .1 | .3 |
| East | 4650 | .1 | .3 |
| East | 4600 | .1 | .3 |
| East | 4550 | .1 | .3 |
| East | 4500 | .1 | .3 |
| East | 4450 | .1 | .3 |
| East | 4400 | .1 | .3 |
| East | 4350 | .1 | .3 |
| East | 4300 | .1 | .3 |
| East | 4250 | .1 | .3 |
| East | 4200 | .1 | .3 |
| East | 4150 | .1 | .3 |
| East | 4100 | .1 | .3 |
| East | 4050 | .1 | .3 |
| East | 4000 | .1 | .3 |
| East | 3950 | .1 | .3 |
| East | 3900 | .1 | .3 |
| East | 3850 | .1 | .3 |
| East | 3800 | .1 | .3 |
| East | 3750 | .1 | .3 |
| East | 3700 | .1 | .3 |
| East | 3650 | .1 | .3 |
| East | 3600 | .1 | .3 |
| East | 3550 | .1 | .3 |
| East | 3500 | .1 | .3 |
| East | 3450 | .1 | .3 |
| East | 3400 | .1 | .3 |
| East | 3350 | .1 | .3 |
| East | 3300 | .1 | .3 |
| East | 3250 | .1 | .3 |
| East | 3200 | .1 | .3 |
| East | 3150 | .1 | .3 |
| East | 3100 | .1 | .3 |
| East | 3050 | .1 | .3 |
| East | 3000 | .1 | .3 |
| East | 2950 | .1 | .3 |
| East | 2900 | .1 | .3 |

| | | | |
|------|------|----|----|
| East | 2850 | .1 | .3 |
| East | 2800 | .1 | .3 |
| East | 2750 | .1 | .3 |
| East | 2700 | .1 | .3 |
| East | 2650 | .1 | .3 |
| East | 2600 | .1 | .3 |
| East | 2550 | .1 | .3 |
| East | 2500 | .1 | .3 |
| East | 2450 | .1 | .3 |
| East | 2400 | .1 | .3 |
| East | 2350 | .1 | .3 |
| East | 2300 | .1 | .3 |
| East | 2250 | .1 | .3 |
| East | 2200 | .1 | .3 |
| East | 2150 | .1 | .3 |
| East | 2100 | .1 | .3 |
| East | 2050 | .1 | .3 |
| East | 2000 | .1 | .3 |
| East | 1950 | .1 | .3 |
| East | 1900 | .1 | .3 |
| East | 1850 | .1 | .3 |
| East | 1800 | .1 | .3 |
| East | 1750 | .1 | .3 |
| East | 1700 | .1 | .3 |
| East | 1650 | .1 | .3 |
| East | 1600 | .1 | .3 |
| East | 1550 | .1 | .3 |
| East | 1500 | .1 | .3 |
| East | 1450 | .1 | .3 |
| East | 1400 | .1 | .3 |
| East | 1350 | .1 | .3 |
| East | 1300 | .1 | .3 |
| East | 1250 | .1 | .3 |
| East | 1200 | .1 | .3 |
| East | 1150 | .1 | .3 |
| East | 1100 | .1 | .3 |
| East | 1050 | .1 | .3 |
| East | 1000 | .1 | .3 |

HEC-RAS Plan: Existing River: Existing Channel Reach: East

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|-------|-----------|---------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| East | 5000 | 100-YR | 43.00 | 6959.70 | 6960.86 | 6960.86 | 6961.15 | 0.036699 | 4.36 | 9.86 | 17.05 | 1.01 |
| East | 5000 | 5-YR | 4.00 | 6959.70 | 6960.15 | 6960.15 | 6960.26 | 0.049278 | 2.69 | 1.49 | 6.62 | 1.00 |
| East | 4950 | 100-YR | 43.00 | 6957.48 | 6958.53 | | 6958.71 | 0.022577 | 3.43 | 12.52 | 21.61 | 0.80 |
| East | 4950 | 5-YR | 4.00 | 6957.48 | 6957.89 | 6957.84 | 6957.95 | 0.030306 | 1.99 | 2.01 | 9.76 | 0.78 |
| East | 4900 | 100-YR | 43.00 | 6956.08 | 6957.19 | 6957.14 | 6957.44 | 0.028870 | 3.98 | 10.80 | 17.92 | 0.90 |
| East | 4900 | 5-YR | 4.00 | 6956.08 | 6956.53 | 6956.47 | 6956.59 | 0.024429 | 1.97 | 2.03 | 8.53 | 0.71 |
| East | 4850 | 100-YR | 43.00 | 6954.44 | 6955.51 | 6955.51 | 6955.84 | 0.035476 | 4.60 | 9.35 | 14.50 | 1.01 |
| East | 4850 | 5-YR | 4.00 | 6954.44 | 6954.77 | 6954.77 | 6954.88 | 0.050805 | 2.71 | 1.48 | 6.68 | 1.02 |
| East | 4800 | 100-YR | 43.00 | 6953.12 | 6954.22 | | 6954.33 | 0.009349 | 2.69 | 15.98 | 20.46 | 0.54 |
| East | 4800 | 5-YR | 4.00 | 6953.12 | 6953.41 | | 6953.44 | 0.015502 | 1.48 | 2.70 | 12.39 | 0.56 |
| East | 4750 | 100-YR | 43.00 | 6952.24 | 6953.55 | | 6953.73 | 0.015007 | 3.39 | 12.69 | 16.31 | 0.68 |
| East | 4750 | 5-YR | 4.00 | 6952.24 | 6952.70 | | 6952.74 | 0.012493 | 1.67 | 2.39 | 7.75 | 0.53 |
| East | 4700 | 100-YR | 43.00 | 6951.54 | 6952.77 | | 6952.96 | 0.016053 | 3.46 | 12.44 | 16.32 | 0.70 |
| East | 4700 | 5-YR | 4.00 | 6951.54 | 6951.92 | | 6951.97 | 0.019453 | 1.90 | 2.11 | 7.91 | 0.65 |
| East | 4650 | 100-YR | 43.00 | 6950.54 | 6951.74 | 6951.65 | 6951.99 | 0.023552 | 3.95 | 10.87 | 15.56 | 0.83 |
| East | 4650 | 5-YR | 4.00 | 6950.54 | 6951.00 | 6950.91 | 6951.06 | 0.017481 | 1.84 | 2.18 | 7.89 | 0.62 |
| East | 4600 | 100-YR | 43.00 | 6949.23 | 6950.23 | 6950.23 | 6950.54 | 0.035718 | 4.46 | 9.64 | 15.79 | 1.01 |
| East | 4600 | 5-YR | 4.00 | 6949.23 | 6949.53 | 6949.53 | 6949.64 | 0.052726 | 2.65 | 1.51 | 7.26 | 1.02 |
| East | 4550 | 100-YR | 43.00 | 6947.88 | 6949.52 | | 6949.60 | 0.006158 | 2.36 | 18.23 | 20.70 | 0.44 |
| East | 4550 | 5-YR | 4.00 | 6947.88 | 6948.60 | | 6948.62 | 0.004239 | 1.06 | 3.78 | 10.84 | 0.32 |
| East | 4500 | 100-YR | 43.00 | 6947.90 | 6948.82 | | 6949.04 | 0.024525 | 3.83 | 11.22 | 17.43 | 0.84 |
| East | 4500 | 5-YR | 4.00 | 6947.90 | 6948.19 | | 6948.23 | 0.018267 | 1.65 | 2.43 | 10.75 | 0.61 |
| East | 4450 | 100-YR | 43.00 | 6946.40 | 6947.45 | 6947.40 | 6947.74 | 0.027957 | 4.27 | 10.06 | 14.54 | 0.91 |
| East | 4450 | 5-YR | 4.00 | 6946.40 | 6946.71 | 6946.71 | 6946.81 | 0.050436 | 2.48 | 1.62 | 8.31 | 0.99 |
| East | 4400 | 100-YR | 43.00 | 6944.96 | 6946.69 | | 6946.85 | 0.011515 | 3.24 | 13.26 | 14.71 | 0.60 |
| East | 4400 | 5-YR | 4.00 | 6944.96 | 6945.69 | | 6945.73 | 0.009171 | 1.60 | 2.50 | 6.78 | 0.46 |
| East | 4350 | 100-YR | 43.00 | 6944.46 | 6945.83 | | 6946.08 | 0.020831 | 4.04 | 10.64 | 13.31 | 0.80 |
| East | 4350 | 5-YR | 4.00 | 6944.46 | 6944.96 | 6944.89 | 6945.03 | 0.023999 | 2.15 | 1.86 | 6.76 | 0.72 |
| East | 4300 | 100-YR | 43.00 | 6943.79 | 6945.06 | 6944.81 | 6945.23 | 0.013613 | 3.28 | 13.12 | 16.46 | 0.65 |
| East | 4300 | 5-YR | 4.00 | 6943.79 | 6944.24 | | 6944.27 | 0.010147 | 1.48 | 2.70 | 9.00 | 0.48 |

HEC-RAS Plan: Existing River: Existing Channel Reach: East (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|-------|-----------|---------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| East | 4250 | 100-YR | 43.00 | 6942.82 | 6943.85 | 6943.85 | 6944.17 | 0.035008 | 4.55 | 9.45 | 14.74 | 1.00 |
| East | 4250 | 5-YR | 4.00 | 6942.82 | 6943.19 | 6943.19 | 6943.28 | 0.053175 | 2.47 | 1.62 | 8.74 | 1.01 |
| East | 4200 | 100-YR | 43.00 | 6941.68 | 6943.18 | | 6943.25 | 0.004488 | 2.09 | 20.61 | 22.22 | 0.38 |
| East | 4200 | 5-YR | 4.00 | 6941.68 | 6942.29 | | 6942.30 | 0.001900 | 0.78 | 5.11 | 12.64 | 0.22 |
| East | 4150 | 100-YR | 43.00 | 6941.65 | 6942.47 | 6942.47 | 6942.73 | 0.037587 | 4.09 | 10.52 | 20.50 | 1.01 |
| East | 4150 | 5-YR | 4.00 | 6941.65 | 6941.96 | 6941.96 | 6942.03 | 0.046812 | 2.16 | 1.85 | 11.10 | 0.93 |
| East | 4100 | 100-YR | 43.00 | 6940.48 | 6941.42 | | 6941.50 | 0.008415 | 2.29 | 18.76 | 28.36 | 0.50 |
| East | 4100 | 5-YR | 4.00 | 6940.48 | 6940.76 | | 6940.78 | 0.010299 | 1.13 | 3.54 | 18.02 | 0.45 |
| East | 4050 | 100-YR | 43.00 | 6939.60 | 6940.41 | 6940.41 | 6940.70 | 0.037059 | 4.31 | 9.97 | 17.56 | 1.01 |
| East | 4050 | 5-YR | 4.00 | 6939.60 | 6939.81 | 6939.79 | 6939.88 | 0.039089 | 2.12 | 1.88 | 10.01 | 0.86 |
| East | 4000 | 100-YR | 43.00 | 6938.49 | 6940.37 | | 6940.39 | 0.001184 | 1.18 | 36.59 | 34.47 | 0.20 |
| East | 4000 | 5-YR | 4.00 | 6938.49 | 6938.88 | | 6938.91 | 0.011363 | 1.42 | 2.82 | 10.93 | 0.49 |
| East | 3950 | 100-YR | 43.00 | 6937.94 | 6940.35 | | 6940.36 | 0.000326 | 0.65 | 66.18 | 57.94 | 0.11 |
| East | 3950 | 5-YR | 4.00 | 6937.94 | 6938.47 | | 6938.49 | 0.006433 | 1.15 | 3.46 | 11.95 | 0.38 |
| East | 3900 | 100-YR | 880.00 | 6937.13 | 6939.82 | | 6940.07 | 0.007176 | 3.98 | 221.03 | 129.74 | 0.54 |
| East | 3900 | 5-YR | 14.00 | 6937.13 | 6937.71 | 6937.67 | 6937.74 | 0.020669 | 1.37 | 10.21 | 65.67 | 0.61 |
| East | 3850 | 100-YR | 880.00 | 6935.31 | 6938.98 | | 6939.51 | 0.017110 | 5.86 | 150.07 | 94.14 | 0.82 |
| East | 3850 | 5-YR | 14.00 | 6935.31 | 6936.24 | 6936.21 | 6936.44 | 0.033437 | 3.56 | 3.93 | 8.45 | 0.92 |
| East | 3800 | 100-YR | 880.00 | 6934.35 | 6937.63 | 6937.63 | 6938.44 | 0.026291 | 7.21 | 121.99 | 76.87 | 1.01 |
| East | 3800 | 5-YR | 14.00 | 6934.35 | 6935.18 | | 6935.25 | 0.016913 | 2.19 | 6.40 | 17.38 | 0.64 |
| East | 3750 | 100-YR | 880.00 | 6933.18 | 6935.97 | 6935.97 | 6936.69 | 0.026437 | 6.83 | 128.91 | 89.51 | 1.00 |
| East | 3750 | 5-YR | 14.00 | 6933.18 | 6933.93 | 6933.90 | 6934.08 | 0.033448 | 3.10 | 4.51 | 12.14 | 0.90 |
| East | 3700 | 100-YR | 880.00 | 6931.90 | 6935.52 | | 6935.80 | 0.007109 | 4.18 | 210.53 | 113.85 | 0.54 |
| East | 3700 | 5-YR | 14.00 | 6931.90 | 6932.80 | | 6932.89 | 0.017452 | 2.47 | 5.67 | 13.17 | 0.66 |
| East | 3650 | 100-YR | 880.00 | 6931.20 | 6934.83 | 6934.62 | 6935.26 | 0.016635 | 5.24 | 168.06 | 122.56 | 0.79 |
| East | 3650 | 5-YR | 14.00 | 6931.20 | 6932.18 | | 6932.24 | 0.010004 | 2.03 | 6.89 | 14.16 | 0.51 |
| East | 3600 | 100-YR | 880.00 | 6930.58 | 6933.47 | 6933.47 | 6934.19 | 0.026631 | 6.81 | 129.30 | 90.30 | 1.00 |
| East | 3600 | 5-YR | 14.00 | 6930.58 | 6931.22 | 6931.20 | 6931.34 | 0.040634 | 2.85 | 4.91 | 17.42 | 0.95 |
| East | 3550 | 100-YR | 880.00 | 6929.49 | 6932.59 | | 6932.98 | 0.011886 | 4.99 | 176.41 | 107.50 | 0.69 |
| East | 3550 | 5-YR | 14.00 | 6929.49 | 6930.27 | | 6930.31 | 0.011960 | 1.72 | 8.13 | 24.52 | 0.53 |

HEC-RAS Plan: Existing River: Existing Channel Reach: East (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|-------|-----------|---------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| East | 3500 | 100-YR | 880.00 | 6928.80 | 6932.16 | | 6932.50 | 0.007413 | 4.65 | 189.41 | 90.02 | 0.56 |
| East | 3500 | 5-YR | 14.00 | 6928.80 | 6929.43 | | 6929.50 | 0.022467 | 2.21 | 6.33 | 21.03 | 0.71 |
| East | 3450 | 100-YR | 880.00 | 6928.01 | 6931.43 | | 6931.99 | 0.013155 | 6.03 | 146.02 | 72.18 | 0.75 |
| East | 3450 | 5-YR | 14.00 | 6928.01 | 6928.72 | | 6928.76 | 0.010592 | 1.58 | 8.87 | 27.90 | 0.49 |
| East | 3400 | 100-YR | 880.00 | 6927.47 | 6930.79 | 6930.47 | 6931.25 | 0.015329 | 5.49 | 160.35 | 102.84 | 0.77 |
| East | 3400 | 5-YR | 14.00 | 6927.47 | 6928.12 | 6927.99 | 6928.17 | 0.013515 | 1.81 | 7.73 | 23.81 | 0.56 |
| East | 3350 | 100-YR | 880.00 | 6926.42 | 6929.45 | 6929.42 | 6930.27 | 0.024029 | 7.29 | 120.78 | 70.80 | 0.98 |
| East | 3350 | 5-YR | 14.00 | 6926.42 | 6926.87 | 6926.87 | 6927.00 | 0.047251 | 2.91 | 4.81 | 18.56 | 1.01 |
| East | 3300 | 100-YR | 880.00 | 6924.78 | 6928.87 | | 6929.39 | 0.011224 | 5.77 | 152.42 | 71.24 | 0.70 |
| East | 3300 | 5-YR | 14.00 | 6924.78 | 6925.58 | | 6925.65 | 0.012551 | 2.08 | 6.72 | 15.81 | 0.56 |
| East | 3250 | 100-YR | 880.00 | 6923.75 | 6928.18 | | 6928.79 | 0.012342 | 6.26 | 140.48 | 62.21 | 0.73 |
| East | 3250 | 5-YR | 14.00 | 6923.75 | 6924.48 | 6924.45 | 6924.64 | 0.036210 | 3.22 | 4.34 | 11.70 | 0.93 |
| East | 3200 | 100-YR | 880.00 | 6923.28 | 6927.07 | 6926.93 | 6927.98 | 0.020071 | 7.69 | 114.50 | 53.76 | 0.93 |
| East | 3200 | 5-YR | 14.00 | 6923.28 | 6924.06 | | 6924.10 | 0.004634 | 1.50 | 9.33 | 16.97 | 0.36 |
| East | 3150 | 100-YR | 880.00 | 6923.15 | 6925.91 | 6925.91 | 6926.88 | 0.024117 | 7.91 | 111.27 | 57.61 | 1.00 |
| East | 3150 | 5-YR | 14.00 | 6923.15 | 6923.67 | | 6923.72 | 0.015644 | 1.63 | 8.57 | 34.37 | 0.58 |
| East | 3100 | 100-YR | 880.00 | 6921.98 | 6925.26 | | 6925.84 | 0.012334 | 6.11 | 144.02 | 66.41 | 0.73 |
| East | 3100 | 5-YR | 14.00 | 6921.98 | 6922.62 | | 6922.70 | 0.027686 | 2.16 | 6.48 | 26.20 | 0.77 |
| East | 3050 | 100-YR | 880.00 | 6921.56 | 6925.08 | | 6925.39 | 0.004921 | 4.50 | 200.36 | 93.77 | 0.48 |
| East | 3050 | 5-YR | 14.00 | 6921.56 | 6921.92 | | 6921.94 | 0.009235 | 1.31 | 10.66 | 39.99 | 0.45 |
| East | 3000 | 100-YR | 880.00 | 6920.57 | 6924.42 | | 6925.00 | 0.011987 | 6.08 | 146.34 | 80.22 | 0.72 |
| East | 3000 | 5-YR | 14.00 | 6920.57 | 6921.05 | | 6921.16 | 0.030929 | 2.64 | 5.31 | 17.30 | 0.84 |
| East | 2950 | 100-YR | 880.00 | 6919.84 | 6923.24 | 6923.24 | 6924.20 | 0.019805 | 7.93 | 116.13 | 71.49 | 0.93 |
| East | 2950 | 5-YR | 14.00 | 6919.84 | 6920.40 | | 6920.45 | 0.007840 | 1.63 | 8.57 | 20.43 | 0.44 |
| East | 2900 | 100-YR | 880.00 | 6919.31 | 6922.38 | 6922.27 | 6923.14 | 0.015667 | 7.14 | 135.67 | 90.41 | 0.83 |
| East | 2900 | 5-YR | 14.00 | 6919.31 | 6919.57 | 6919.56 | 6919.67 | 0.043662 | 2.56 | 5.47 | 24.20 | 0.95 |
| East | 2850 | 100-YR | 880.00 | 6917.96 | 6922.05 | | 6922.48 | 0.008515 | 5.30 | 173.38 | 97.24 | 0.61 |
| East | 2850 | 5-YR | 14.00 | 6917.96 | 6918.48 | | 6918.54 | 0.013678 | 1.99 | 7.02 | 18.84 | 0.58 |
| East | 2800 | 100-YR | 880.00 | 6917.16 | 6920.74 | 6920.74 | 6921.80 | 0.019517 | 8.27 | 110.09 | 67.16 | 0.93 |
| East | 2800 | 5-YR | 14.00 | 6917.16 | 6917.66 | | 6917.74 | 0.018761 | 2.23 | 6.28 | 18.08 | 0.67 |

HEC-RAS Plan: Existing River: Existing Channel Reach: East (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|-------|-----------|---------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| East | 2750 | 100-YR | 880.00 | 6915.84 | 6919.79 | 6919.67 | 6920.64 | 0.021782 | 7.39 | 119.13 | 63.08 | 0.95 |
| East | 2750 | 5-YR | 14.00 | 6915.84 | 6916.49 | | 6916.60 | 0.027695 | 2.72 | 5.14 | 14.61 | 0.81 |
| East | 2700 | 100-YR | 880.00 | 6914.78 | 6919.33 | | 6919.82 | 0.010160 | 5.59 | 158.99 | 85.51 | 0.66 |
| East | 2700 | 5-YR | 14.00 | 6914.78 | 6915.54 | 6915.40 | 6915.62 | 0.014491 | 2.25 | 6.22 | 14.47 | 0.60 |
| East | 2650 | 100-YR | 880.00 | 6913.71 | 6917.78 | 6917.78 | 6919.01 | 0.022953 | 8.88 | 99.38 | 45.63 | 1.01 |
| East | 2650 | 5-YR | 14.00 | 6913.71 | 6914.27 | 6914.27 | 6914.44 | 0.042538 | 3.32 | 4.22 | 12.34 | 1.00 |
| East | 2600 | 100-YR | 880.00 | 6912.84 | 6916.95 | 6916.95 | 6917.96 | 0.016859 | 8.11 | 114.79 | 86.19 | 0.88 |
| East | 2600 | 5-YR | 14.00 | 6912.84 | 6913.56 | | 6913.61 | 0.008222 | 1.83 | 7.63 | 15.76 | 0.46 |
| East | 2550 | 100-YR | 880.00 | 6912.38 | 6915.93 | 6915.70 | 6916.48 | 0.012350 | 6.15 | 162.55 | 119.51 | 0.73 |
| East | 2550 | 5-YR | 14.00 | 6912.38 | 6912.88 | 6912.81 | 6912.97 | 0.022779 | 2.41 | 5.82 | 17.27 | 0.73 |
| East | 2500 | 100-YR | 880.00 | 6911.54 | 6915.38 | | 6915.78 | 0.013164 | 5.04 | 174.57 | 113.18 | 0.72 |
| East | 2500 | 5-YR | 14.00 | 6911.54 | 6912.11 | 6911.95 | 6912.17 | 0.011681 | 1.96 | 7.15 | 17.50 | 0.54 |
| East | 2450 | 100-YR | 880.00 | 6910.62 | 6914.10 | 6914.10 | 6914.96 | 0.018168 | 7.52 | 125.22 | 92.48 | 0.89 |
| East | 2450 | 5-YR | 14.00 | 6910.62 | 6911.01 | 6911.01 | 6911.15 | 0.044623 | 3.00 | 4.67 | 16.51 | 0.99 |
| East | 2400 | 100-YR | 880.00 | 6907.81 | 6912.72 | 6912.60 | 6913.72 | 0.020181 | 8.06 | 109.65 | 52.89 | 0.94 |
| East | 2400 | 5-YR | 14.00 | 6907.81 | 6909.36 | | 6909.40 | 0.002629 | 1.43 | 9.76 | 12.11 | 0.28 |
| East | 2350 | 100-YR | 880.00 | 6908.31 | 6912.09 | 6911.78 | 6912.65 | 0.017486 | 6.04 | 145.77 | 92.62 | 0.83 |
| East | 2350 | 5-YR | 14.00 | 6908.31 | 6909.14 | | 6909.18 | 0.008051 | 1.71 | 8.17 | 18.46 | 0.45 |
| East | 2300 | 100-YR | 880.00 | 6908.18 | 6910.90 | 6910.90 | 6911.70 | 0.019749 | 7.38 | 130.55 | 88.05 | 0.92 |
| East | 2300 | 5-YR | 14.00 | 6908.18 | 6908.61 | | 6908.65 | 0.014289 | 1.67 | 8.37 | 30.31 | 0.56 |
| East | 2250 | 100-YR | 880.00 | 6907.30 | 6910.18 | | 6910.72 | 0.016717 | 5.85 | 150.37 | 93.35 | 0.81 |
| East | 2250 | 5-YR | 14.00 | 6907.30 | 6907.61 | | 6907.68 | 0.028653 | 2.04 | 6.85 | 30.99 | 0.77 |
| East | 2200 | 100-YR | 880.00 | 6906.18 | 6908.81 | 6908.81 | 6909.67 | 0.025344 | 7.41 | 118.78 | 70.62 | 1.01 |
| East | 2200 | 5-YR | 14.00 | 6906.18 | 6906.56 | | 6906.60 | 0.016610 | 1.70 | 8.25 | 32.69 | 0.60 |
| East | 2150 | 100-YR | 880.00 | 6905.09 | 6907.46 | 6907.46 | 6908.33 | 0.025269 | 7.47 | 117.75 | 68.96 | 1.01 |
| East | 2150 | 5-YR | 14.00 | 6905.09 | 6905.45 | 6905.41 | 6905.51 | 0.029664 | 1.88 | 7.47 | 39.40 | 0.76 |
| East | 2100 | 100-YR | 880.00 | 6903.79 | 6906.44 | | 6907.02 | 0.017047 | 6.11 | 143.96 | 84.97 | 0.83 |
| East | 2100 | 5-YR | 14.00 | 6903.79 | 6904.35 | | 6904.40 | 0.017075 | 1.83 | 7.63 | 27.49 | 0.61 |
| East | 2050 | 100-YR | 880.00 | 6903.25 | 6905.91 | | 6906.31 | 0.010559 | 5.08 | 173.36 | 94.41 | 0.66 |
| East | 2050 | 5-YR | 14.00 | 6903.25 | 6903.81 | | 6903.83 | 0.007776 | 1.25 | 11.24 | 40.15 | 0.41 |


HEC-RAS Plan: Existing River: Existing Channel Reach: East (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|-------|-----------|---------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| East | 2000 | 100-YR | 880.00 | 6902.93 | 6905.46 | | 6905.81 | 0.008814 | 4.69 | 187.81 | 100.72 | 0.60 |
| East | 2000 | 5-YR | 14.00 | 6902.93 | 6903.35 | | 6903.37 | 0.011438 | 1.22 | 11.50 | 56.74 | 0.48 |
| East | 1950 | 100-YR | 880.00 | 6902.27 | 6905.08 | | 6905.38 | 0.007938 | 4.38 | 200.75 | 110.13 | 0.57 |
| East | 1950 | 5-YR | 14.00 | 6902.27 | 6902.70 | | 6902.74 | 0.014071 | 1.41 | 9.90 | 45.58 | 0.54 |
| East | 1900 | 100-YR | 880.00 | 6901.77 | 6904.66 | | 6904.97 | 0.008319 | 4.47 | 196.81 | 108.57 | 0.59 |
| East | 1900 | 5-YR | 14.00 | 6901.77 | 6902.09 | | 6902.12 | 0.010813 | 1.39 | 10.04 | 38.75 | 0.48 |
| East | 1850 | 100-YR | 880.00 | 6901.20 | 6903.61 | 6903.53 | 6904.28 | 0.022907 | 6.58 | 133.81 | 88.45 | 0.94 |
| East | 1850 | 5-YR | 14.00 | 6901.20 | 6901.56 | 6901.44 | 6901.59 | 0.010508 | 1.45 | 9.66 | 34.42 | 0.48 |
| East | 1800 | 100-YR | 880.00 | 6900.25 | 6902.69 | | 6903.25 | 0.017469 | 6.00 | 146.79 | 90.94 | 0.83 |
| East | 1800 | 5-YR | 14.00 | 6900.25 | 6900.49 | 6900.49 | 6900.57 | 0.054590 | 2.25 | 6.21 | 39.29 | 1.00 |
| East | 1750 | 100-YR | 880.00 | 6899.75 | 6902.27 | | 6902.55 | 0.009309 | 4.22 | 208.72 | 136.86 | 0.60 |
| East | 1750 | 5-YR | 14.00 | 6899.75 | 6900.16 | | 6900.17 | 0.002612 | 0.80 | 17.56 | 54.06 | 0.25 |
| East | 1700 | 100-YR | 880.00 | 6899.58 | 6901.83 | | 6902.06 | 0.009474 | 3.91 | 225.10 | 167.64 | 0.59 |
| East | 1700 | 5-YR | 14.00 | 6899.58 | 6899.89 | | 6899.91 | 0.014544 | 1.28 | 10.92 | 59.80 | 0.53 |
| East | 1650 | 100-YR | 880.00 | 6898.99 | 6901.44 | | 6901.64 | 0.007234 | 3.55 | 247.56 | 173.70 | 0.52 |
| East | 1650 | 5-YR | 14.00 | 6898.99 | 6899.54 | | 6899.55 | 0.004246 | 0.94 | 14.91 | 51.72 | 0.31 |
| East | 1600 | 100-YR | 880.00 | 6898.29 | 6900.57 | 6900.55 | 6900.97 | 0.029291 | 5.10 | 172.65 | 201.43 | 0.97 |
| East | 1600 | 5-YR | 14.00 | 6898.29 | 6899.04 | 6898.94 | 6899.13 | 0.022796 | 2.39 | 5.85 | 17.54 | 0.73 |
| East | 1550 | 100-YR | 880.00 | 6897.87 | 6899.60 | | 6899.88 | 0.015843 | 4.32 | 203.85 | 192.52 | 0.74 |
| East | 1550 | 5-YR | 14.00 | 6897.87 | 6898.19 | | 6898.21 | 0.014518 | 1.14 | 12.29 | 80.18 | 0.51 |
| East | 1500 | 100-YR | 880.00 | 6897.28 | 6898.85 | | 6899.12 | 0.014571 | 4.17 | 210.88 | 196.80 | 0.71 |
| East | 1500 | 5-YR | 14.00 | 6897.28 | 6897.62 | | 6897.63 | 0.009372 | 0.89 | 15.66 | 105.95 | 0.41 |
| East | 1450 | 100-YR | 880.00 | 6896.36 | 6898.24 | | 6898.45 | 0.011479 | 3.73 | 243.10 | 234.35 | 0.63 |
| East | 1450 | 5-YR | 14.00 | 6896.36 | 6896.71 | 6896.69 | 6896.78 | 0.039766 | 2.05 | 6.84 | 39.39 | 0.87 |
| East | 1400 | 100-YR | 880.00 | 6894.94 | 6897.76 | | 6897.92 | 0.006047 | 3.34 | 276.99 | 186.93 | 0.48 |
| East | 1400 | 5-YR | 14.00 | 6894.94 | 6895.37 | 6895.29 | 6895.43 | 0.019574 | 1.99 | 7.02 | 24.71 | 0.66 |
| East | 1350 | 100-YR | 880.00 | 6893.53 | 6896.51 | 6896.51 | 6897.30 | 0.026314 | 7.16 | 122.97 | 79.06 | 1.01 |
| East | 1350 | 5-YR | 14.00 | 6893.53 | 6893.84 | 6893.84 | 6893.95 | 0.049736 | 2.64 | 5.30 | 24.69 | 1.00 |
| East | 1300 | 100-YR | 880.00 | 6889.13 | 6893.14 | | 6893.67 | 0.012928 | 5.83 | 150.96 | 76.82 | 0.73 |
| East | 1300 | 5-YR | 14.00 | 6889.13 | 6889.67 | | 6889.71 | 0.007983 | 1.54 | 9.07 | 23.82 | 0.44 |

HEC-RAS Plan: Existing River: Existing Channel Reach: East (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|-------|-----------|---------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| East | 1250 | 100-YR | 880.00 | 6888.78 | 6892.52 | 6891.92 | 6893.03 | 0.012479 | 5.72 | 153.94 | 78.94 | 0.72 |
| East | 1250 | 5-YR | 14.00 | 6888.78 | 6889.36 | | 6889.39 | 0.005136 | 1.33 | 10.54 | 24.88 | 0.36 |
| East | 1200 | 100-YR | 880.00 | 6888.27 | 6891.21 | 6891.21 | 6892.12 | 0.026053 | 7.63 | 115.37 | 65.50 | 1.01 |
| East | 1200 | 5-YR | 14.00 | 6888.27 | 6888.70 | 6888.70 | 6888.81 | 0.044386 | 2.65 | 5.29 | 22.50 | 0.96 |
| East | 1150 | 100-YR | 880.00 | 6885.25 | 6889.31 | | 6889.45 | 0.002445 | 3.04 | 289.00 | 112.95 | 0.34 |
| East | 1150 | 5-YR | 14.00 | 6885.25 | 6885.74 | | 6885.77 | 0.010348 | 1.47 | 9.52 | 32.78 | 0.48 |
| East | 1100 | 100-YR | 880.00 | 6884.72 | 6889.19 | | 6889.34 | 0.002046 | 3.16 | 278.35 | 89.62 | 0.32 |
| East | 1100 | 5-YR | 14.00 | 6884.72 | 6885.26 | | 6885.29 | 0.008650 | 1.37 | 10.21 | 34.19 | 0.44 |
| East | 1050 | 100-YR | 880.00 | 6884.18 | 6889.04 | | 6889.23 | 0.002327 | 3.47 | 253.67 | 78.02 | 0.34 |
| East | 1050 | 5-YR | 14.00 | 6884.18 | 6884.70 | | 6884.74 | 0.014211 | 1.63 | 8.59 | 32.24 | 0.56 |
| East | 1000 | 100-YR | 880.00 | 6883.33 | 6887.34 | 6887.34 | 6888.83 | 0.022827 | 9.80 | 89.84 | 30.43 | 1.01 |
| East | 1000 | 5-YR | 14.00 | 6883.33 | 6883.72 | 6883.66 | 6883.82 | 0.024726 | 2.53 | 5.54 | 16.13 | 0.76 |


Existing Channel East

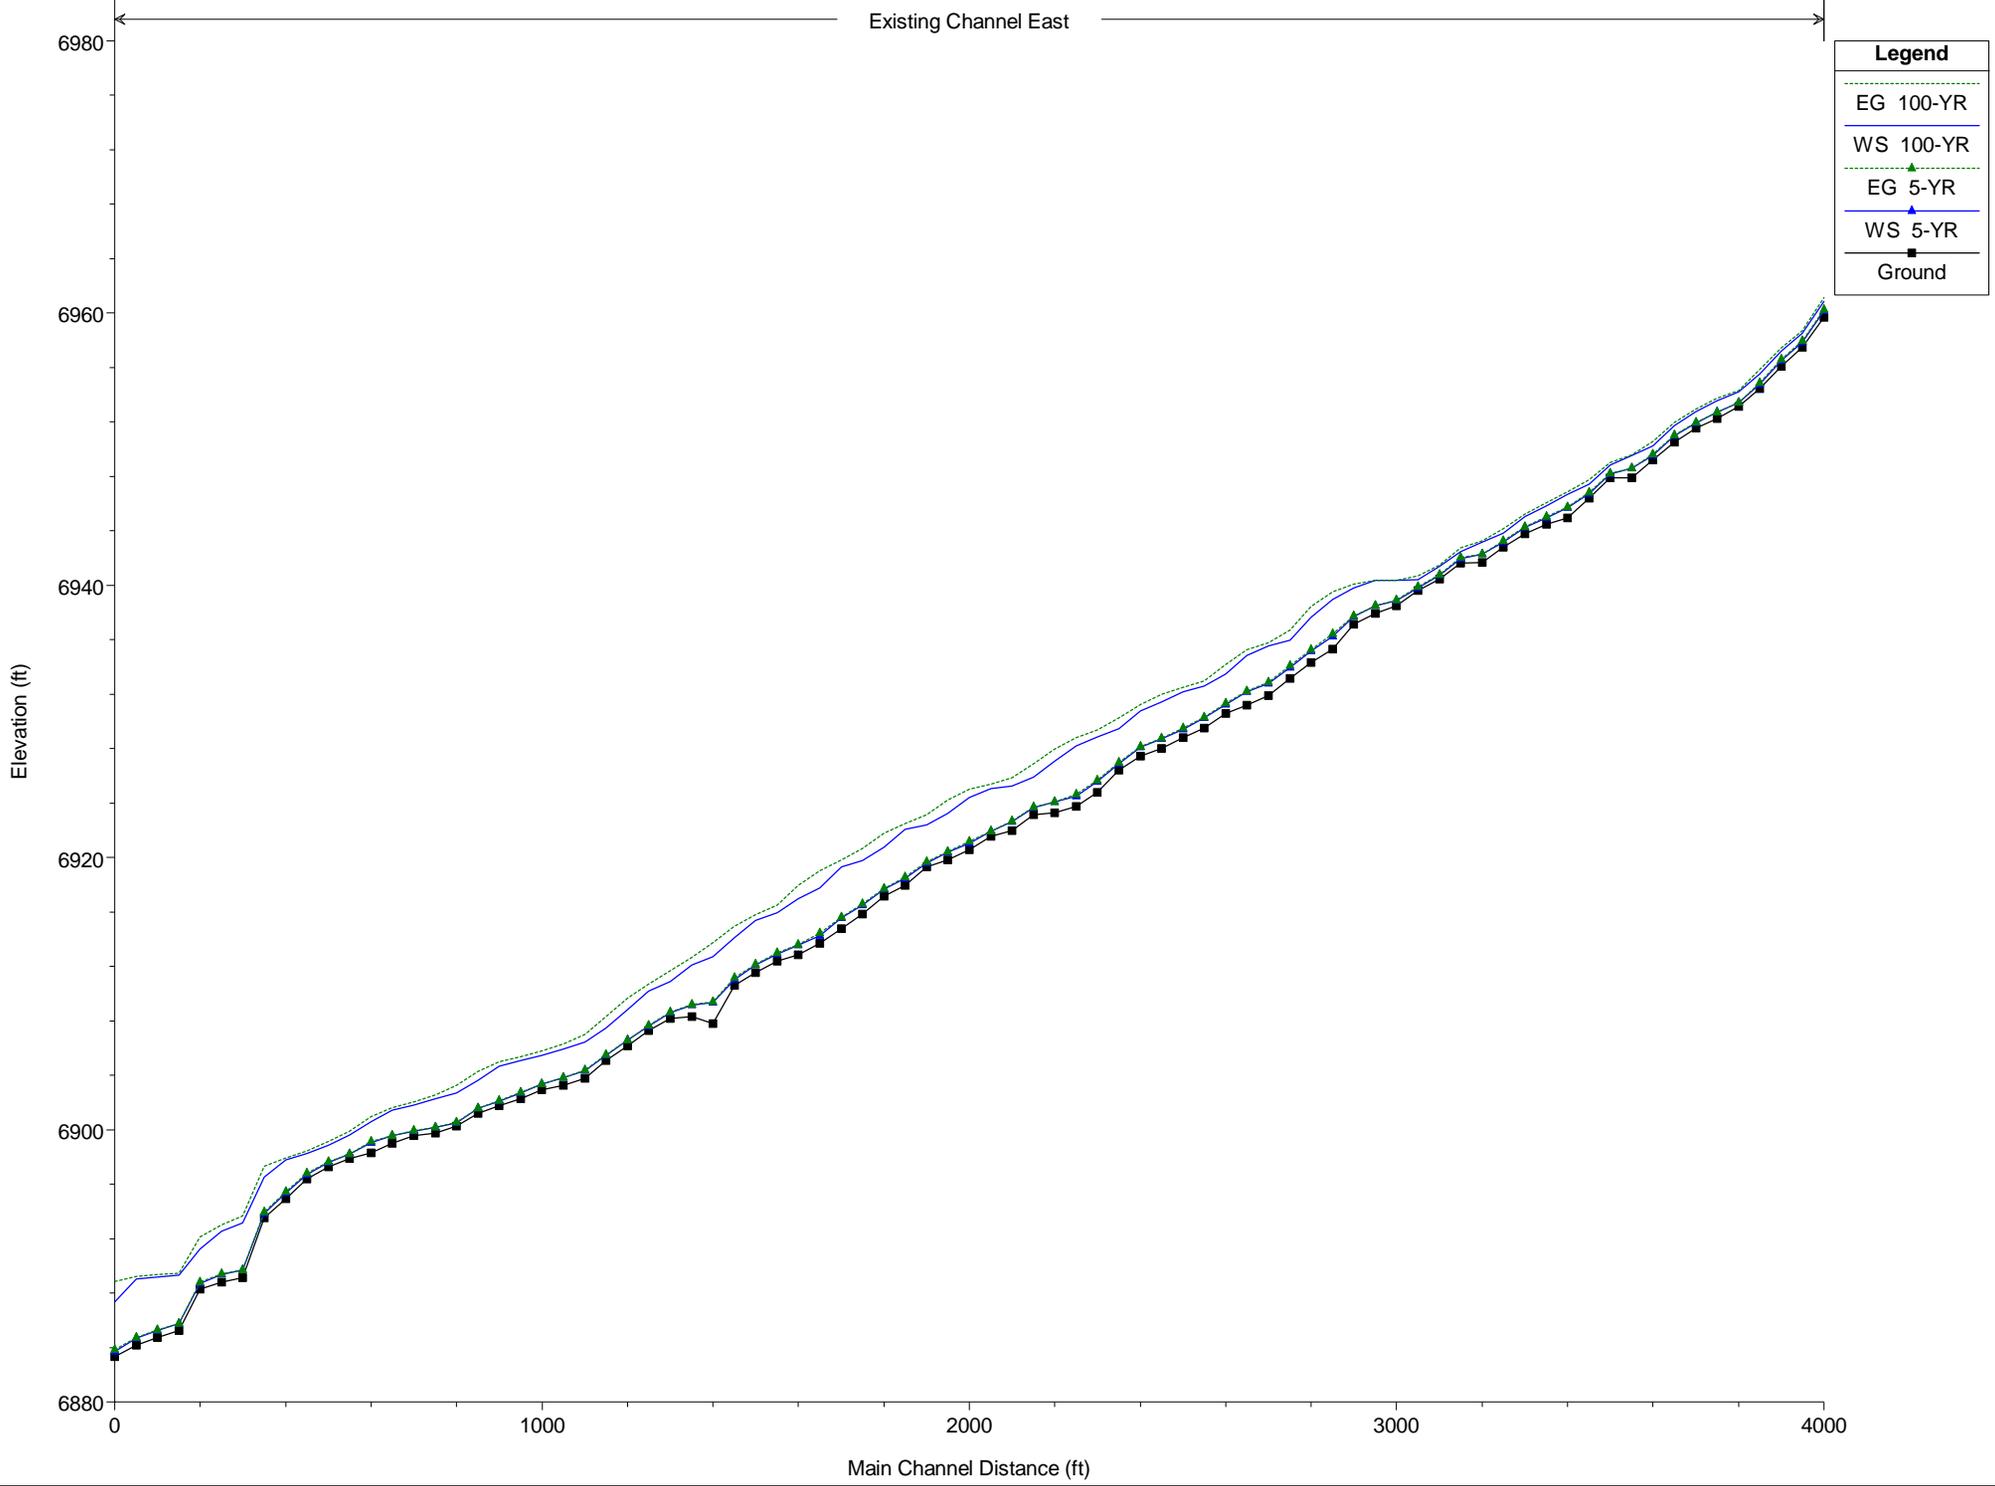


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground


HEC-RAS Model Plan: Existing 5/21/2019
RS = 5000

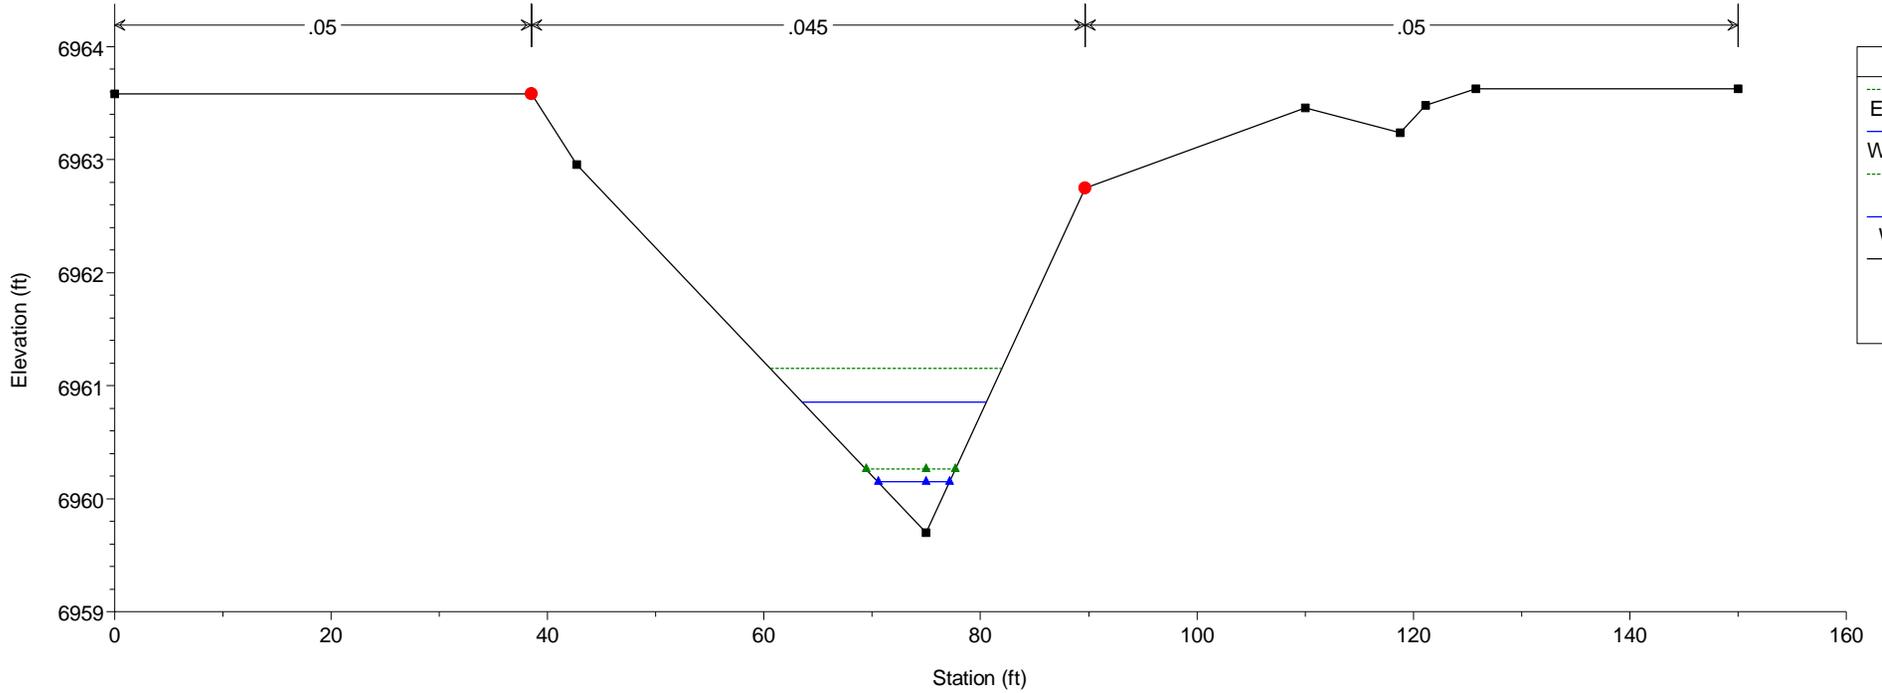


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4950

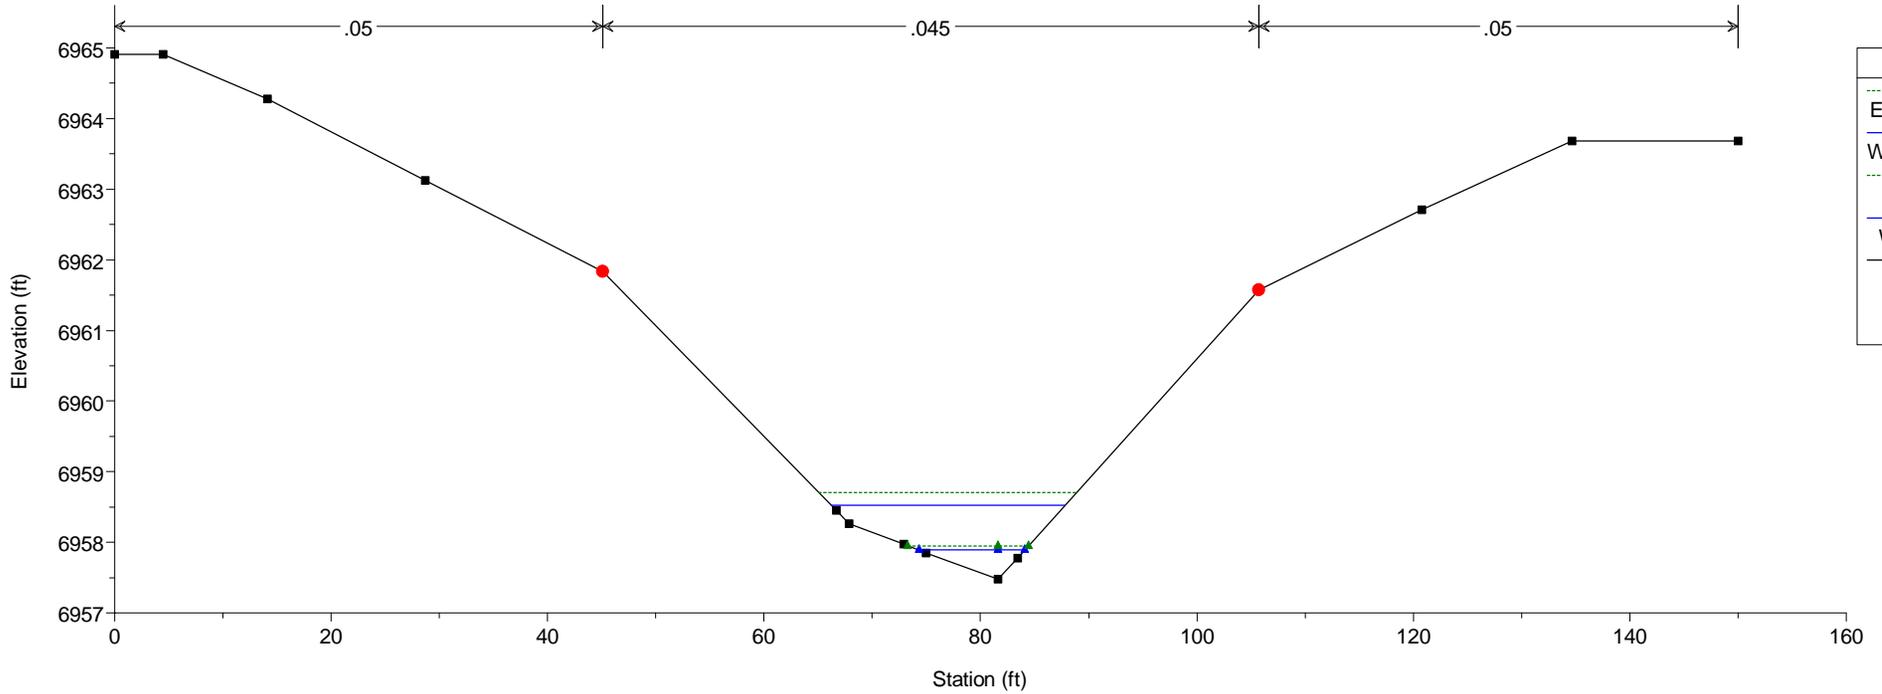



HEC-RAS Model Plan: Existing 5/21/2019
RS = 4900

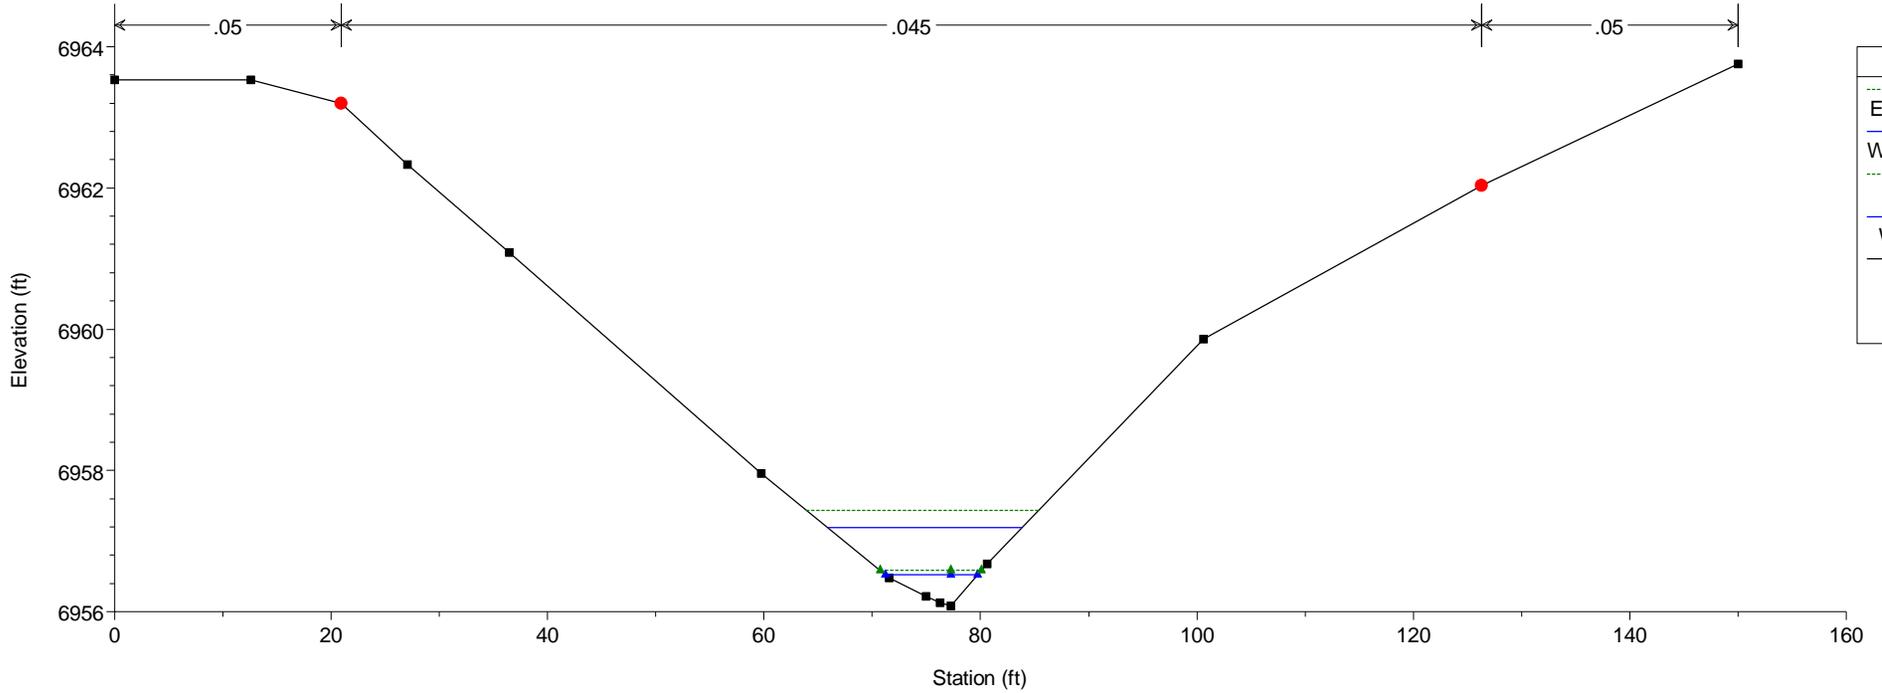



HEC-RAS Model Plan: Existing 5/21/2019
RS = 4850

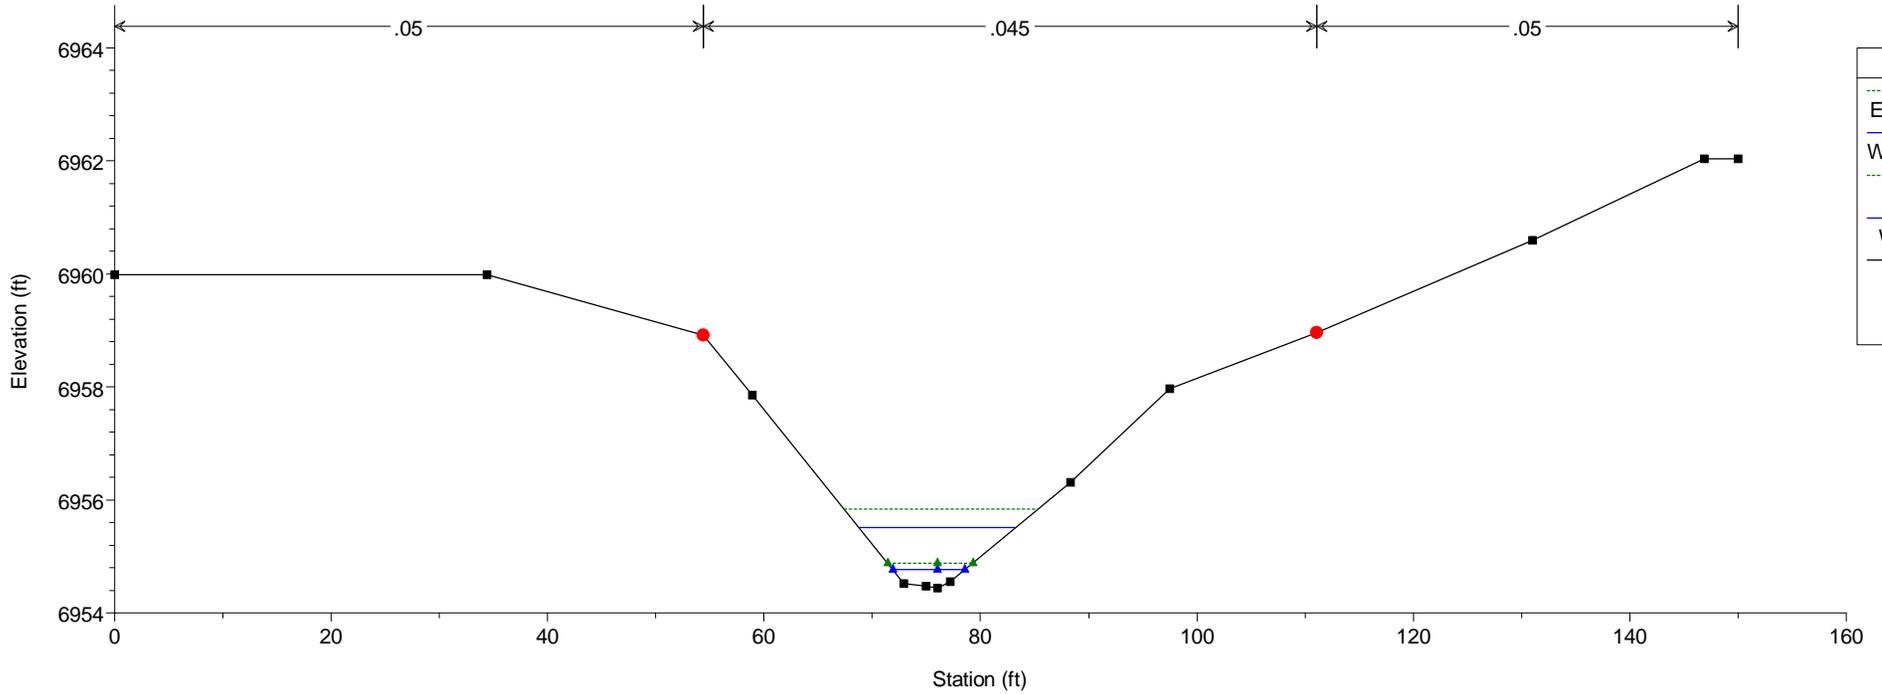


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4800

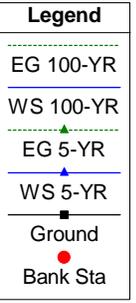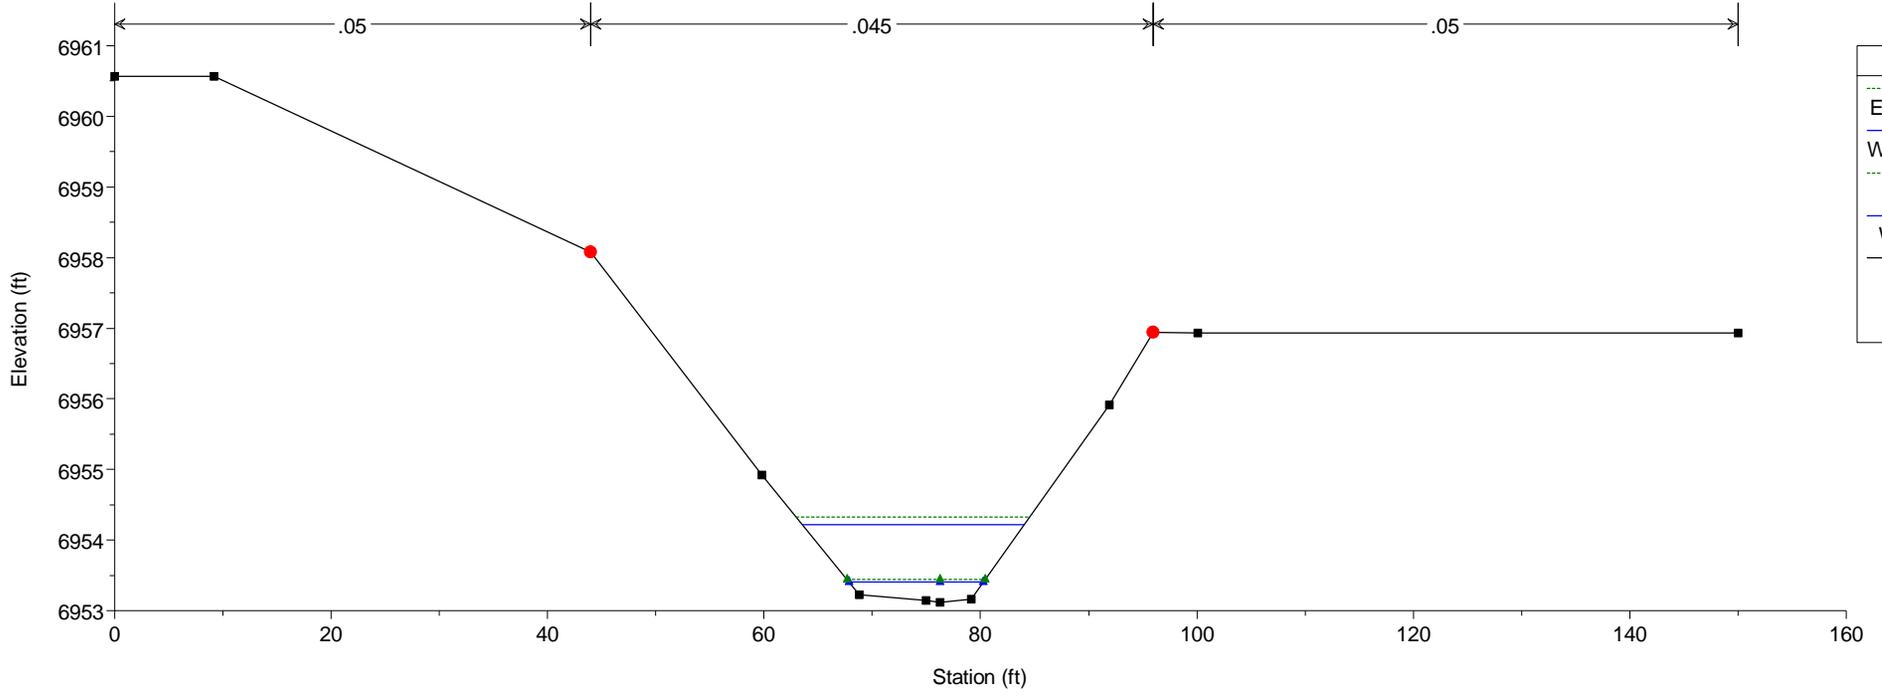


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4750

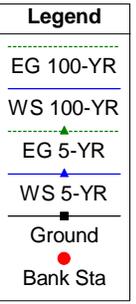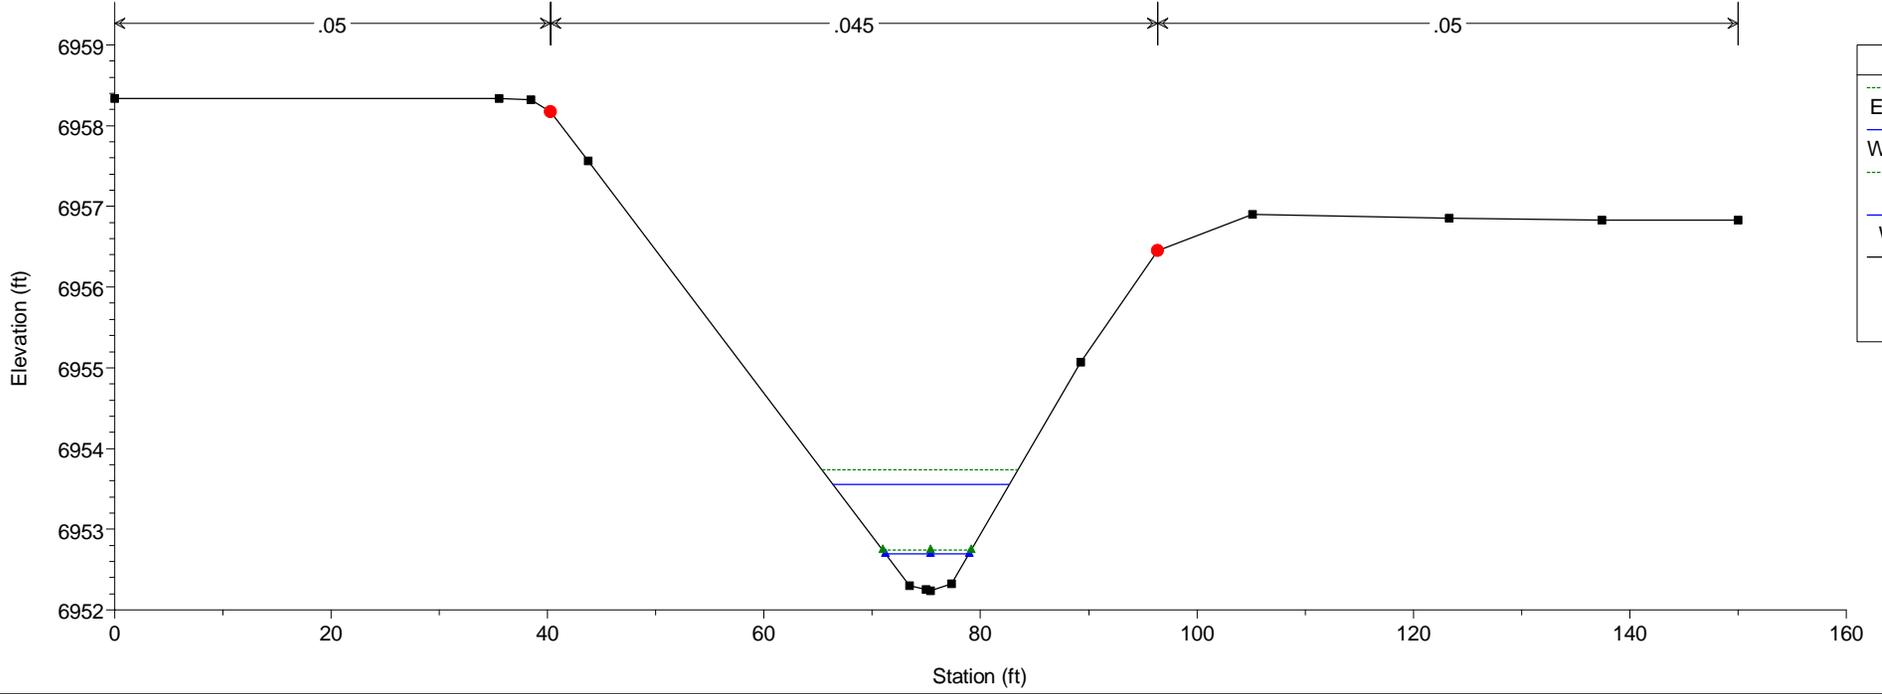



HEC-RAS Model Plan: Existing 5/21/2019
RS = 4700

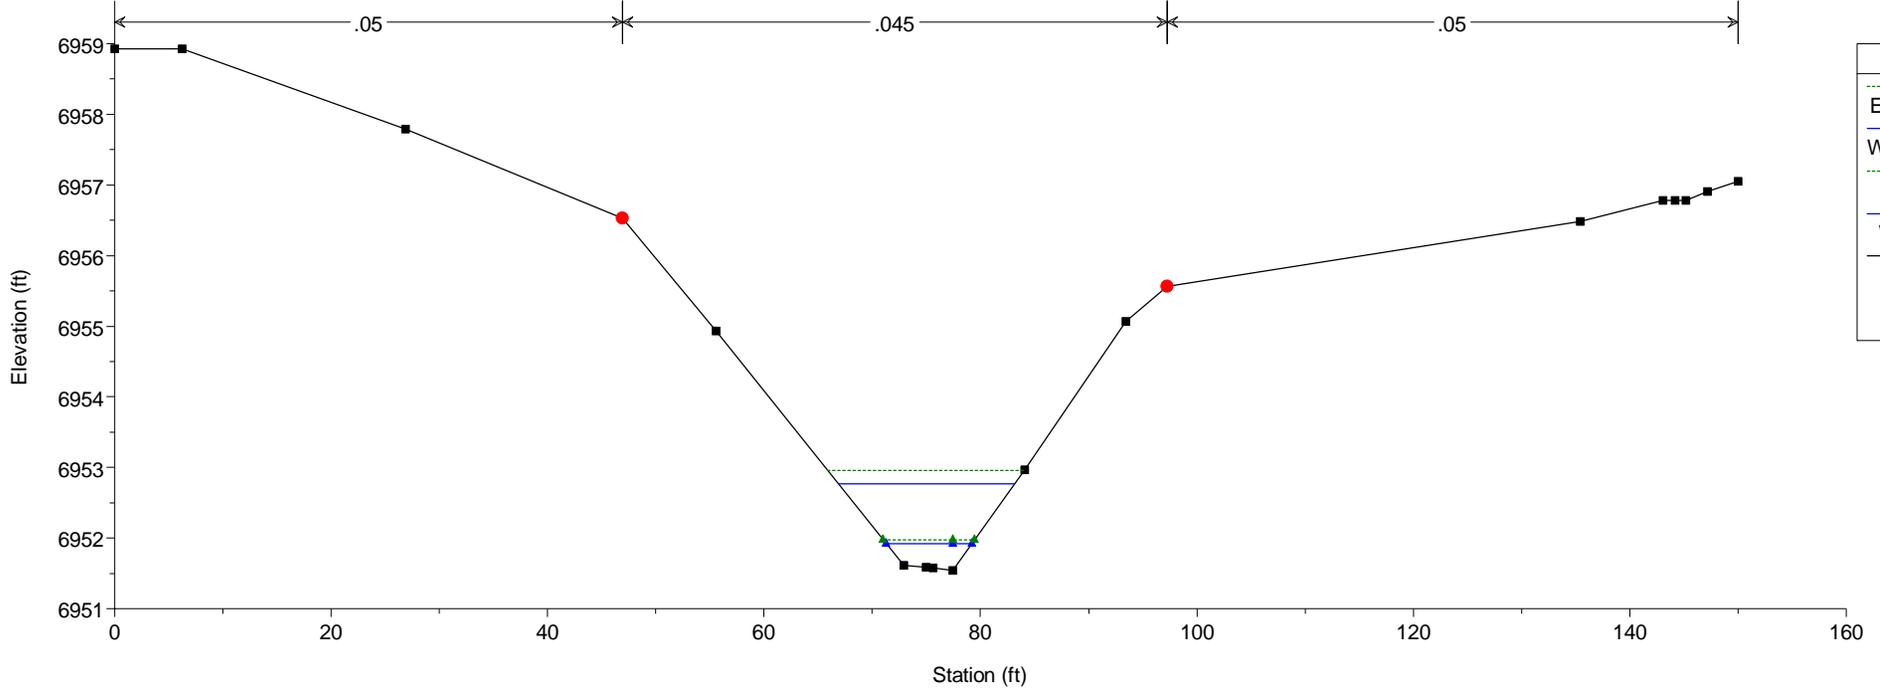



HEC-RAS Model Plan: Existing 5/21/2019
RS = 4650

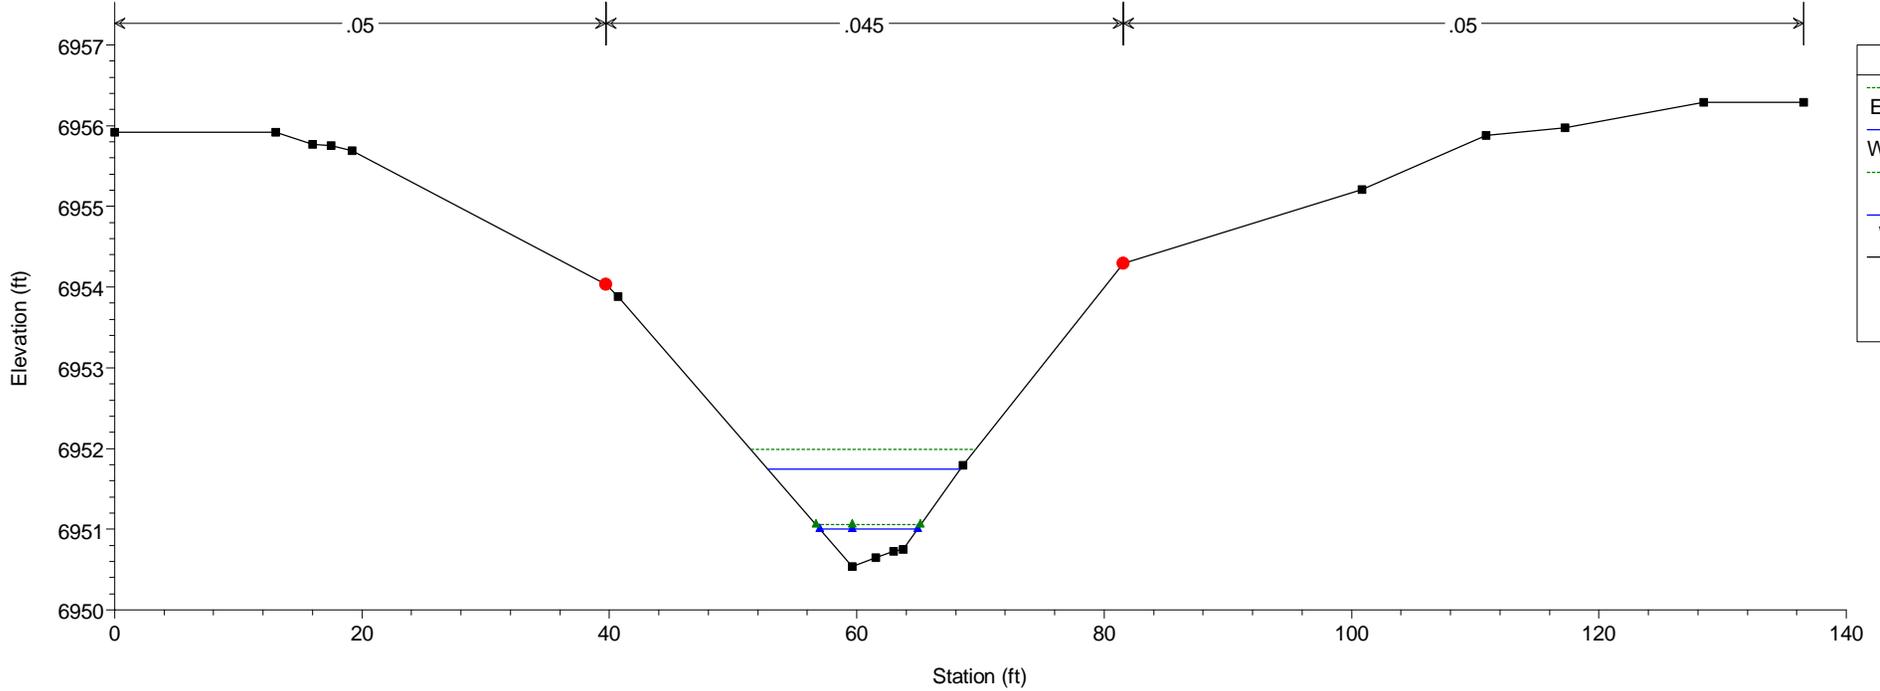

HEC-RAS Model Plan: Existing 5/21/2019
RS = 4600

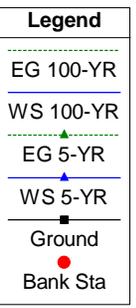
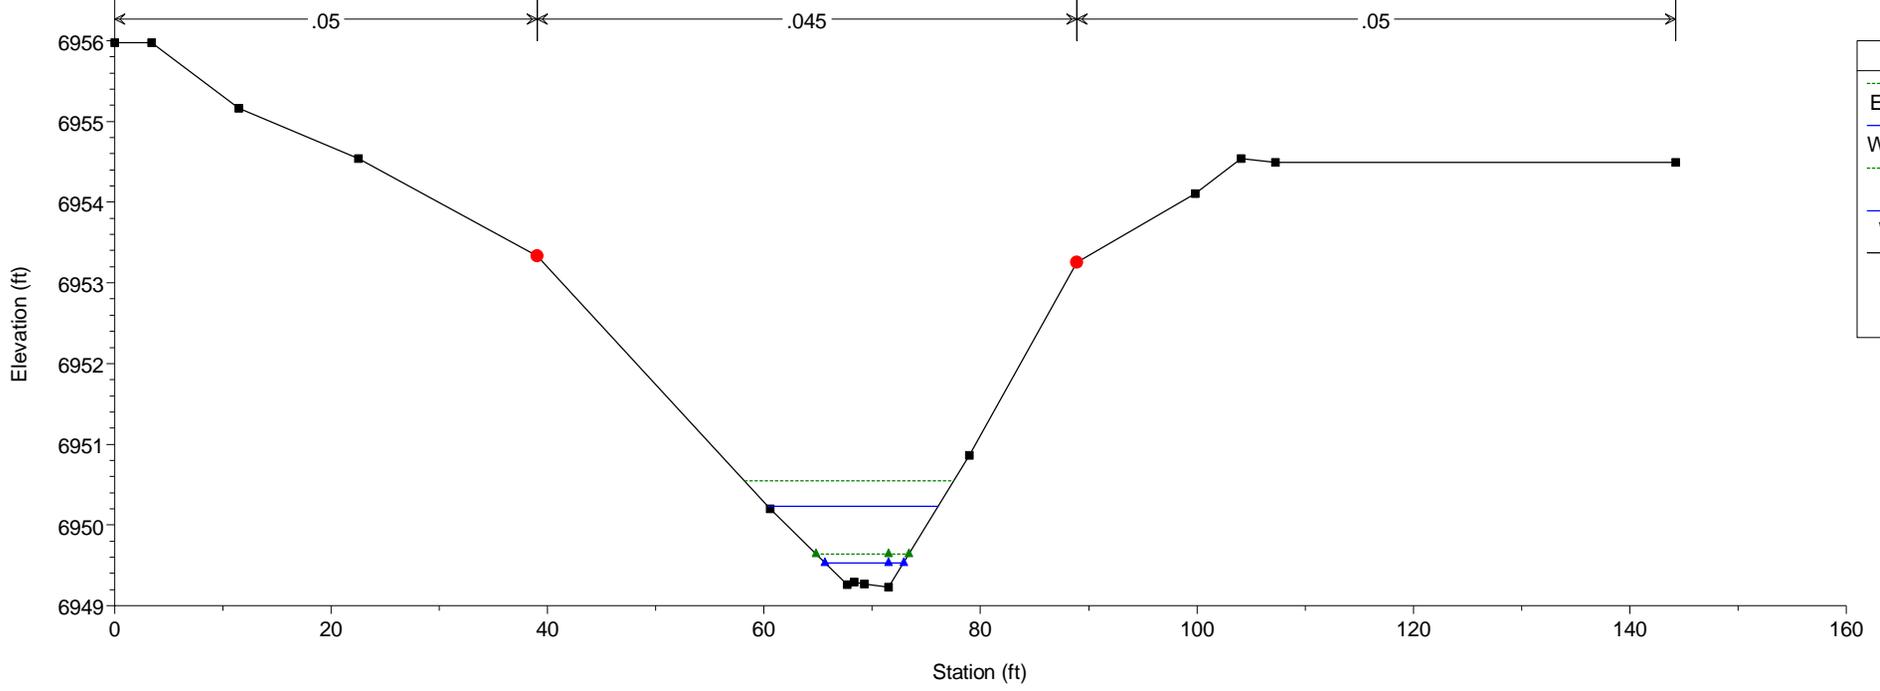


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4550

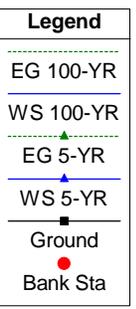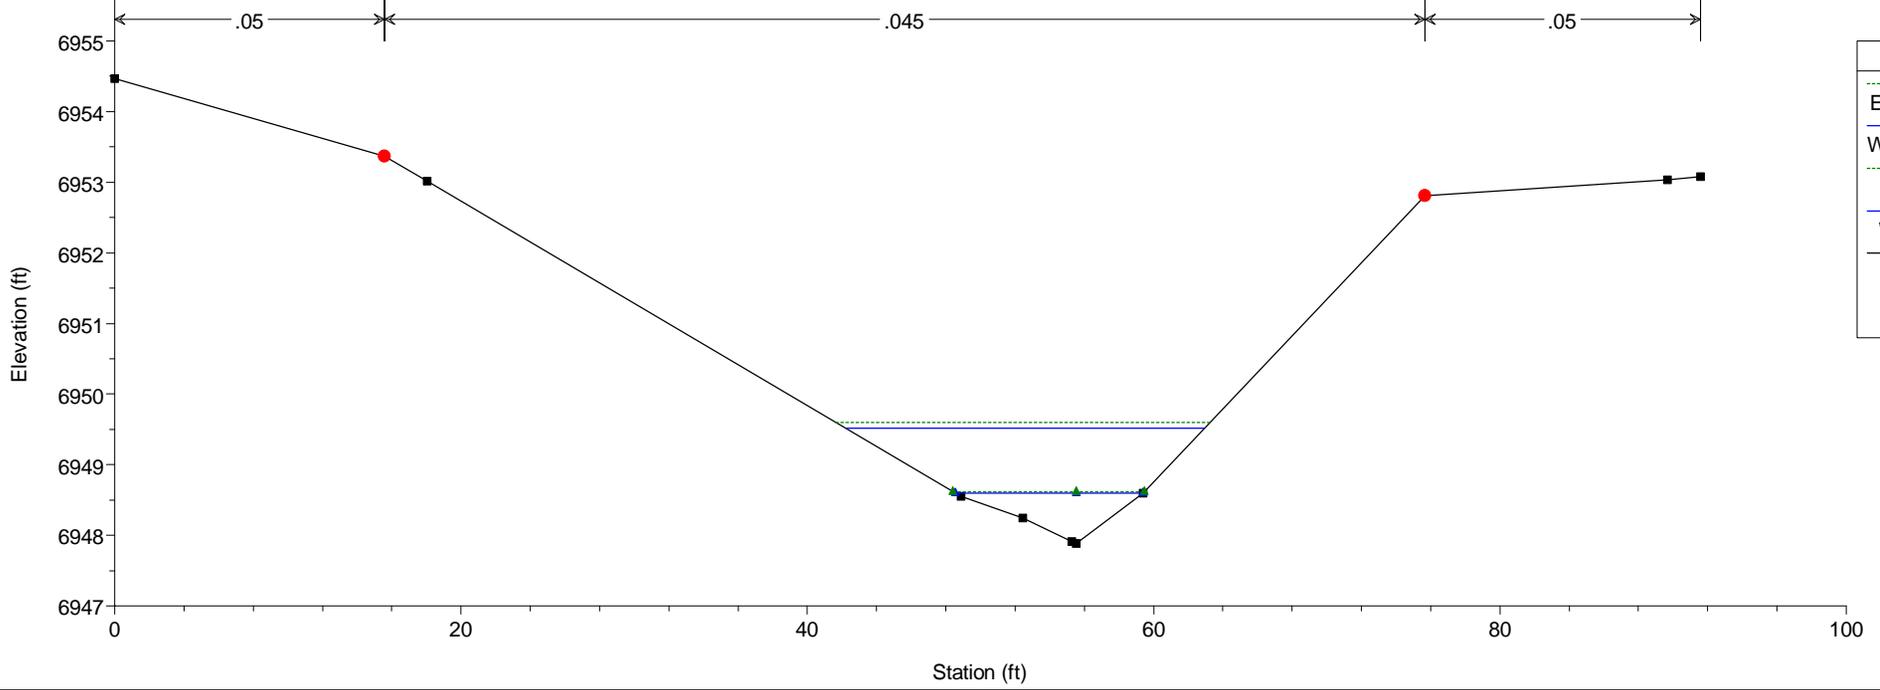



HEC-RAS Model Plan: Existing 5/21/2019

RS = 4500

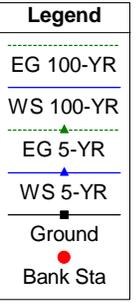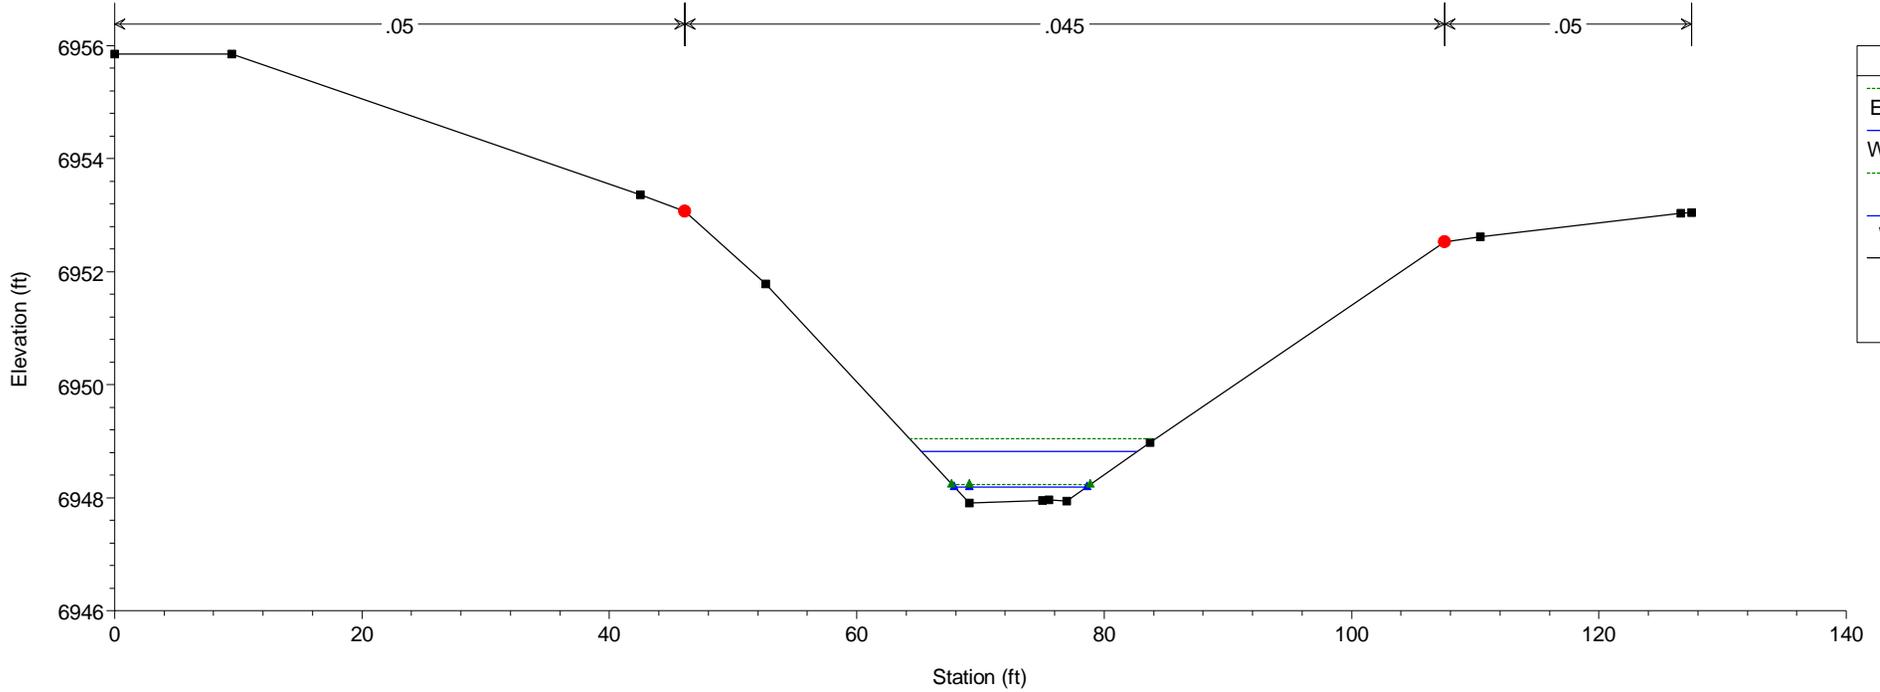


HEC-RAS Model Plan: Existing 5/21/2019


RS = 4450

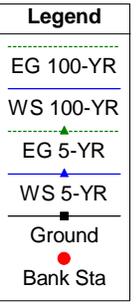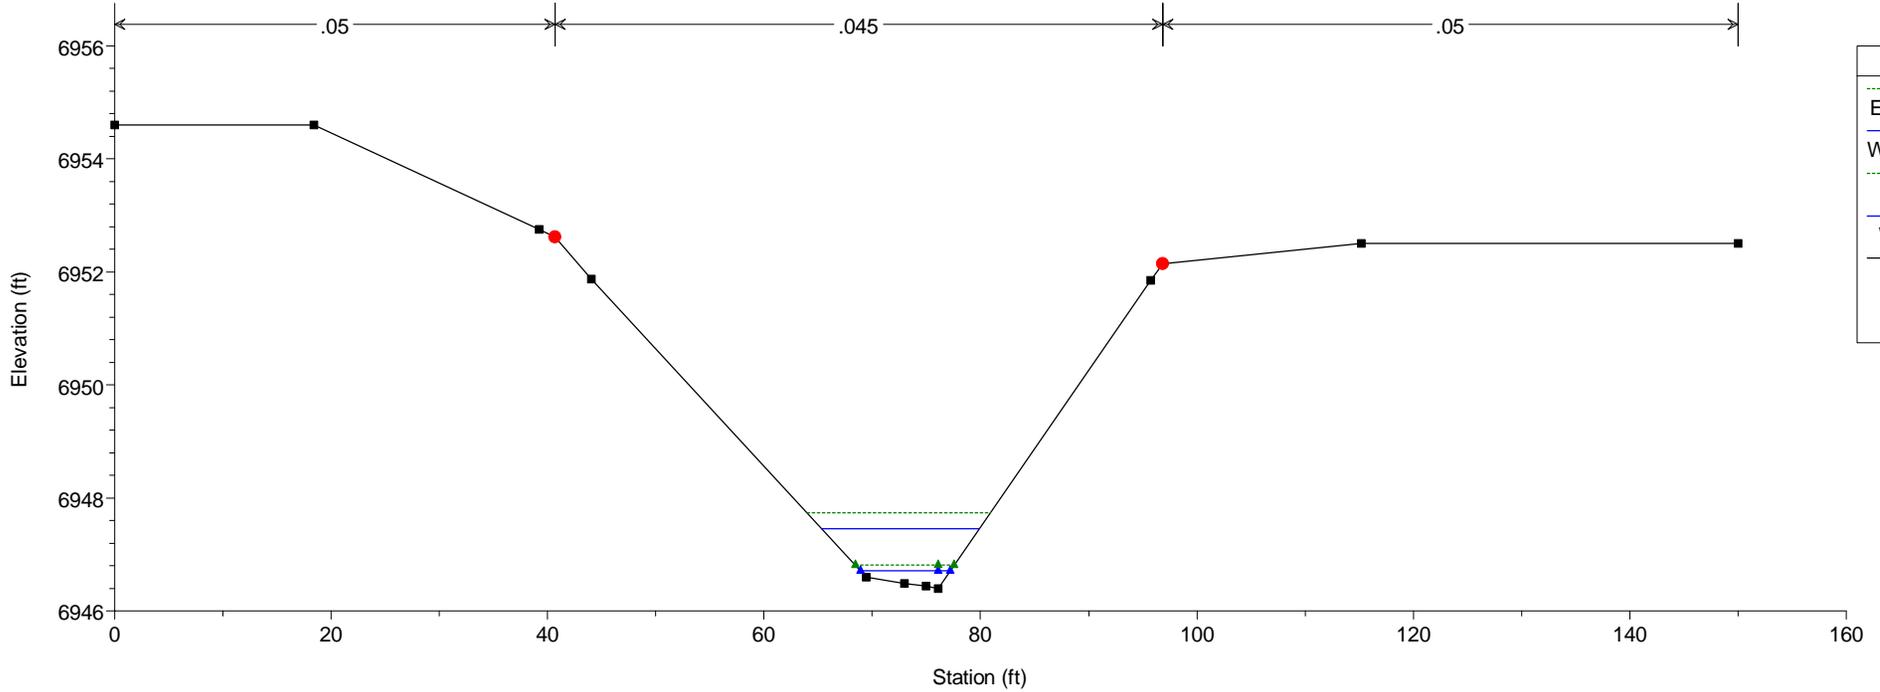


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4400

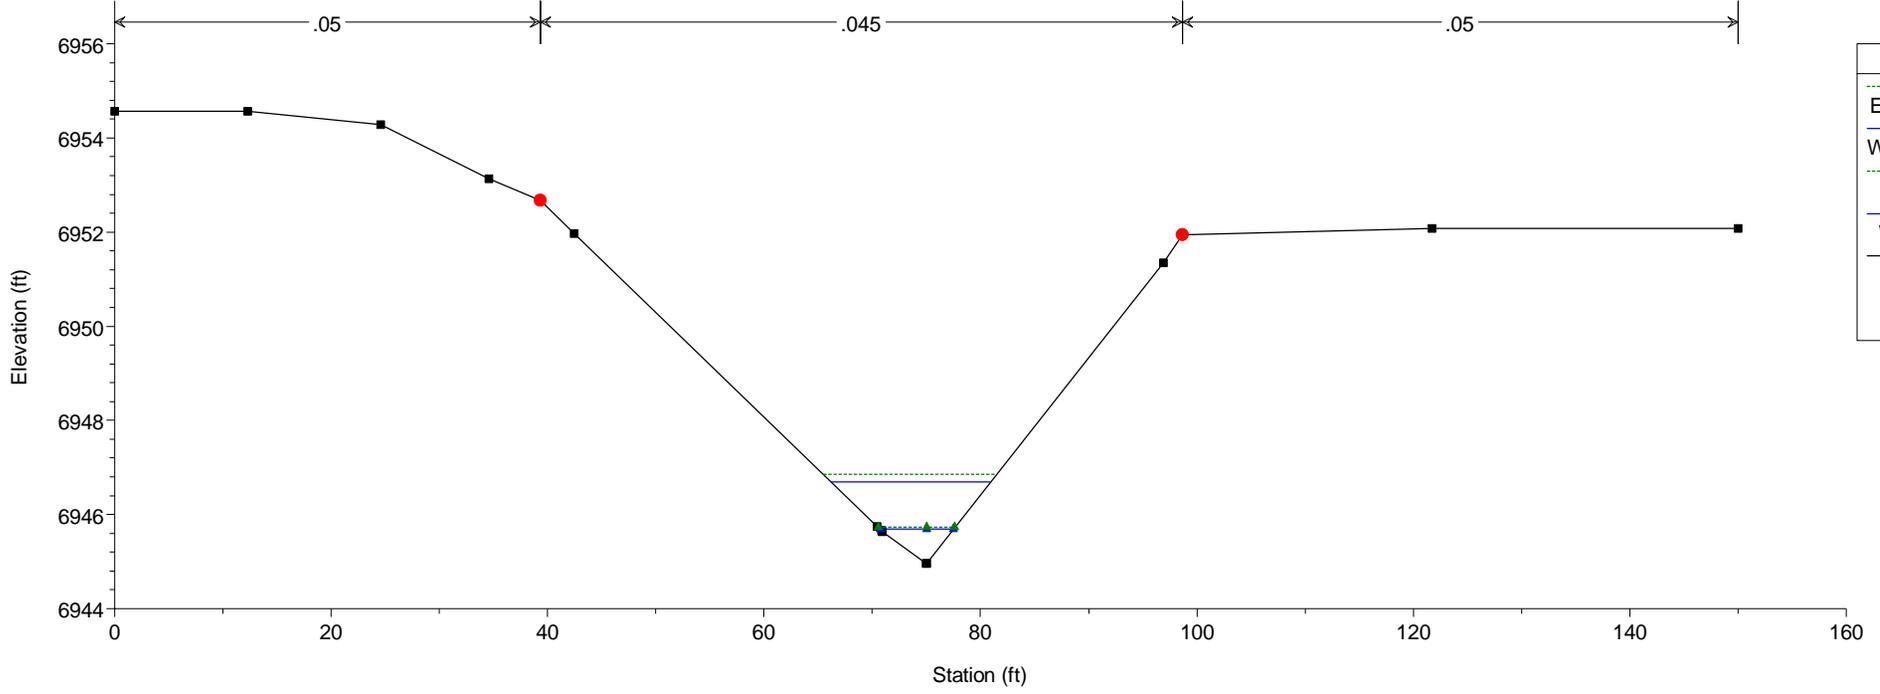


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4350

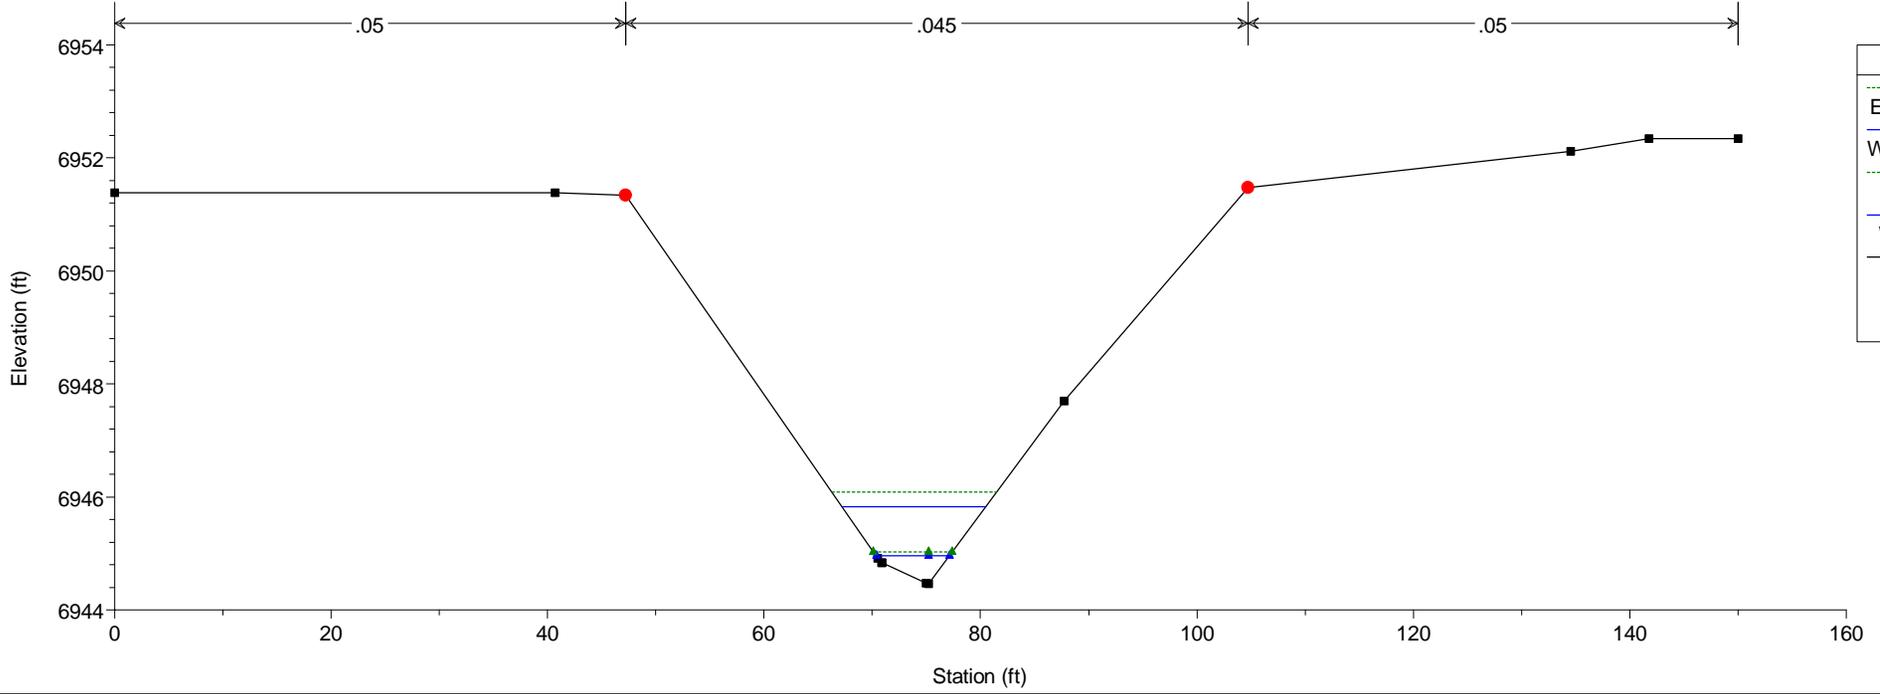

HEC-RAS Model Plan: Existing 5/21/2019
RS = 4200

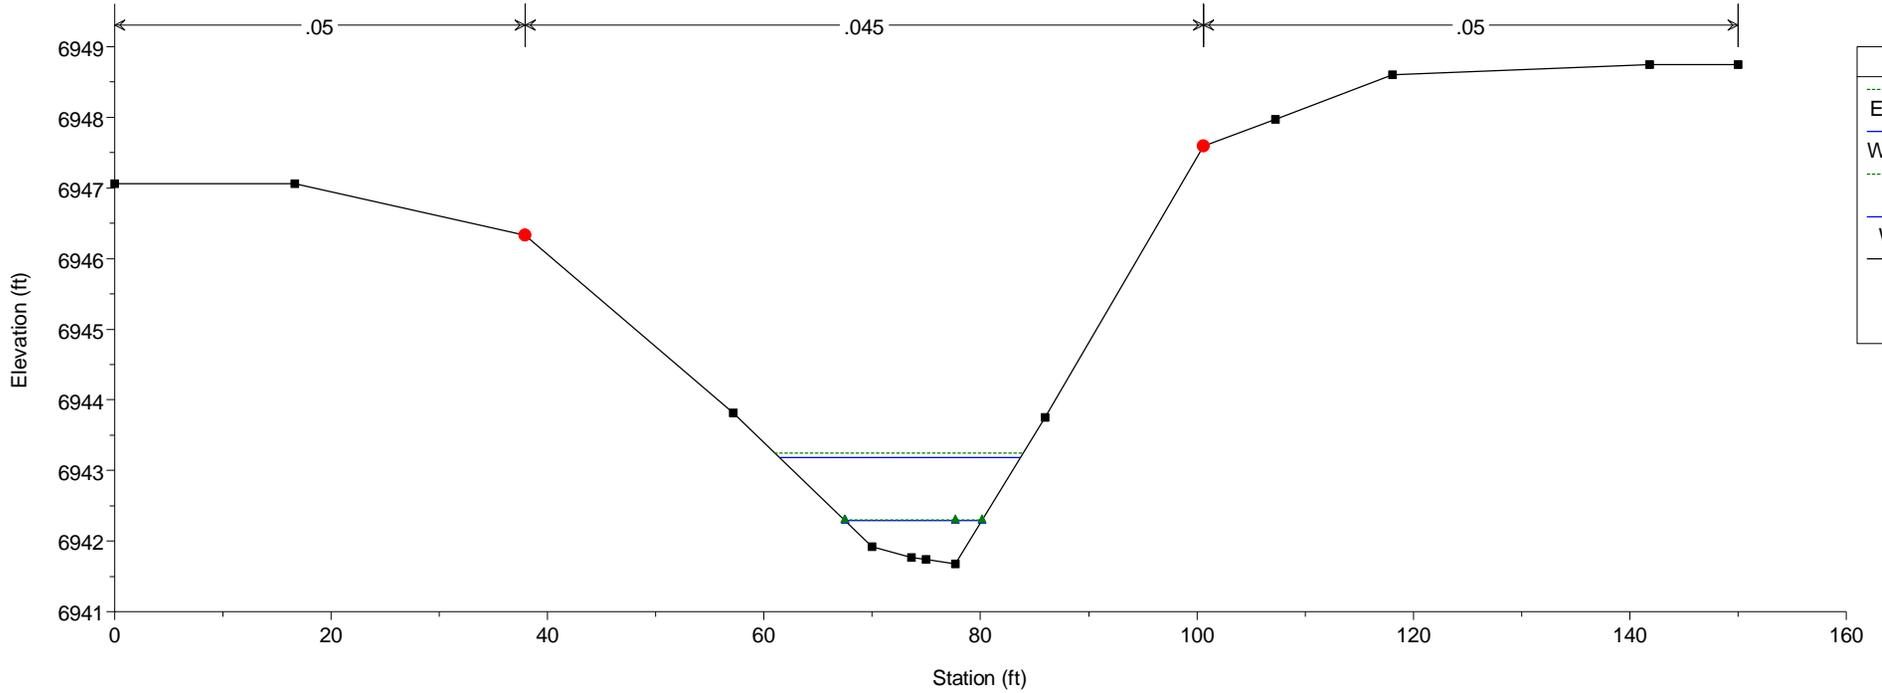

HEC-RAS Model Plan: Existing 5/21/2019
RS = 4150

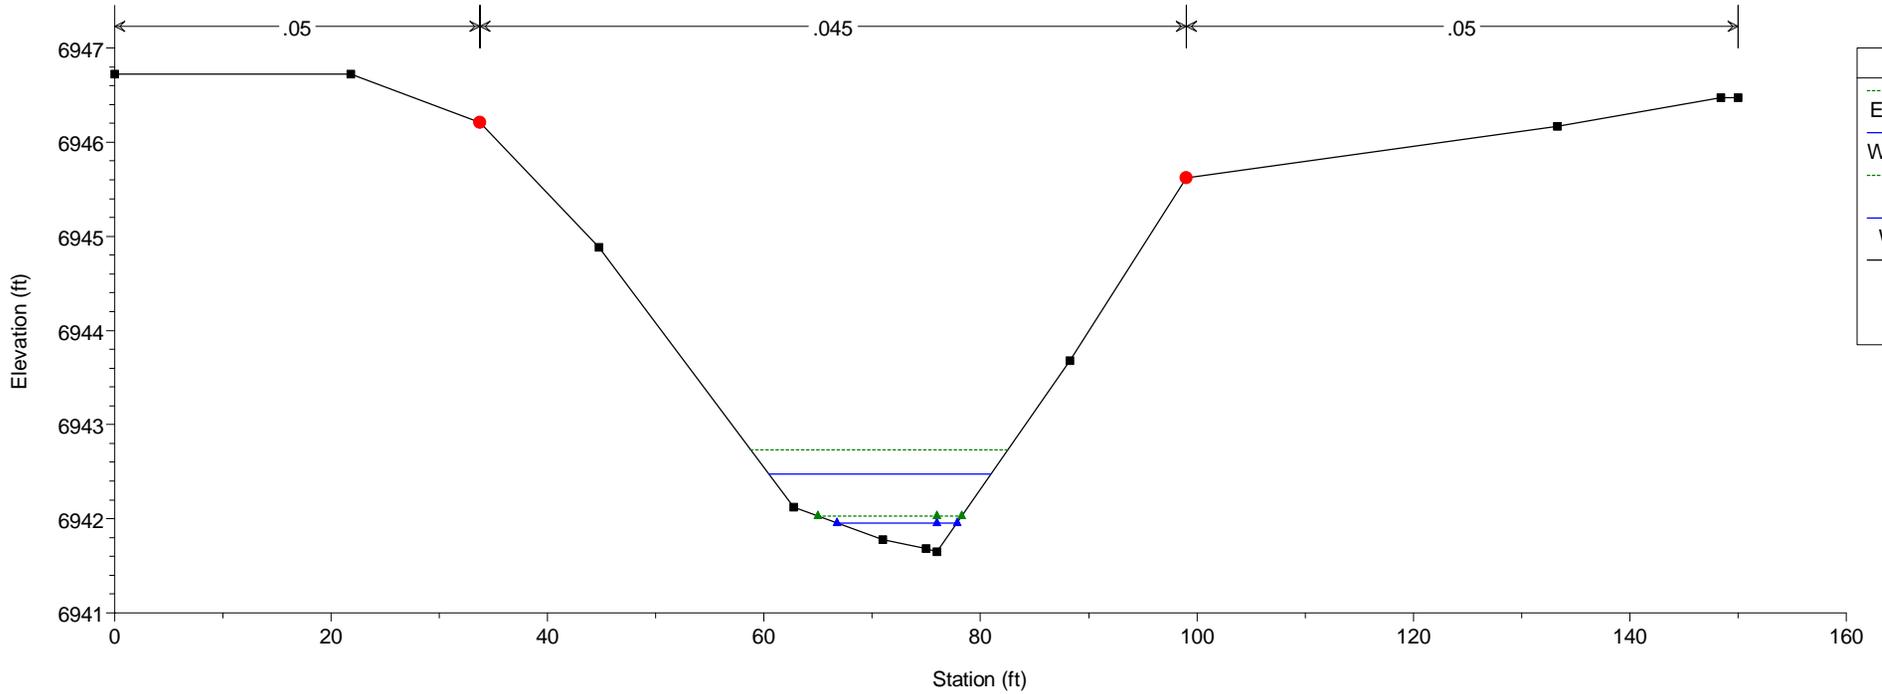

Legend


- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019

RS = 4100


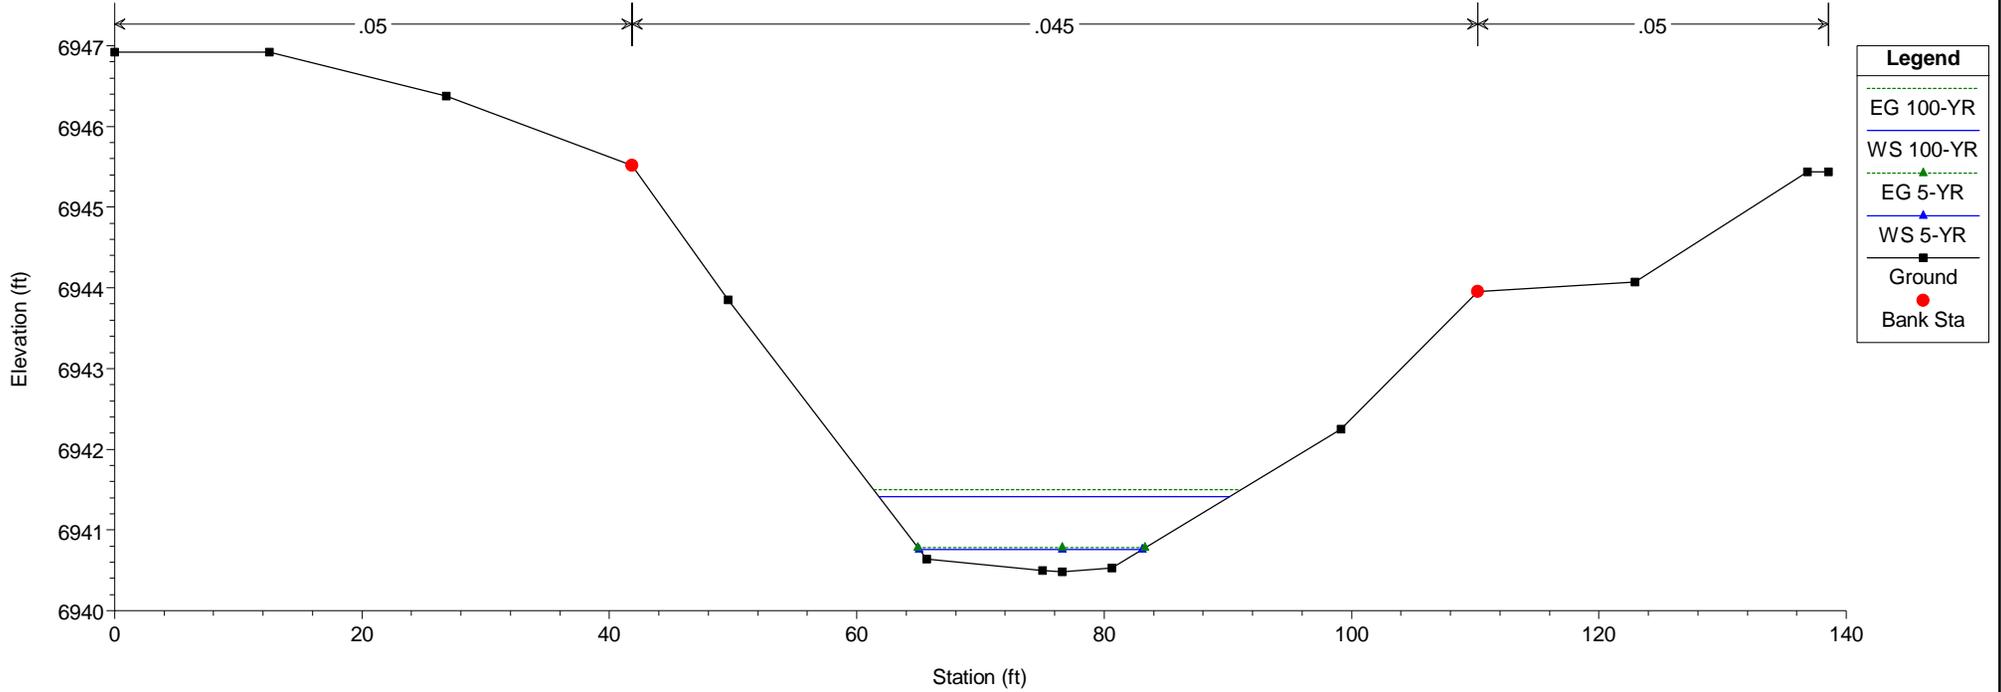


HEC-RAS Model Plan: Existing 5/21/2019



RS = 4050

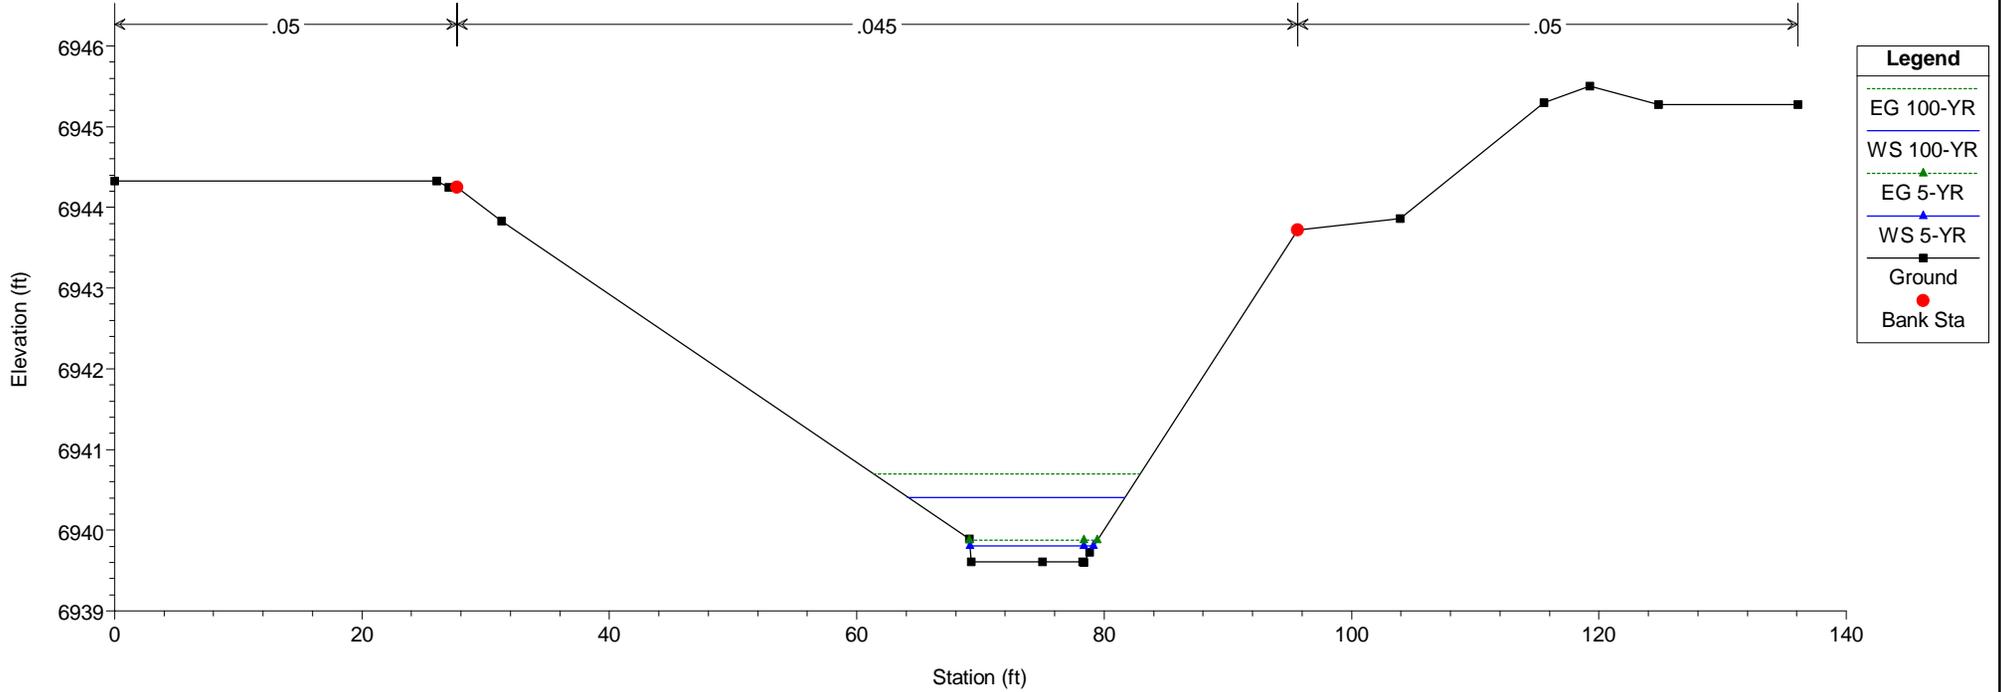


HEC-RAS Model Plan: Existing 5/21/2019
RS = 4000

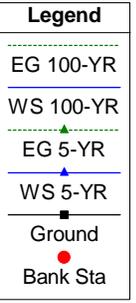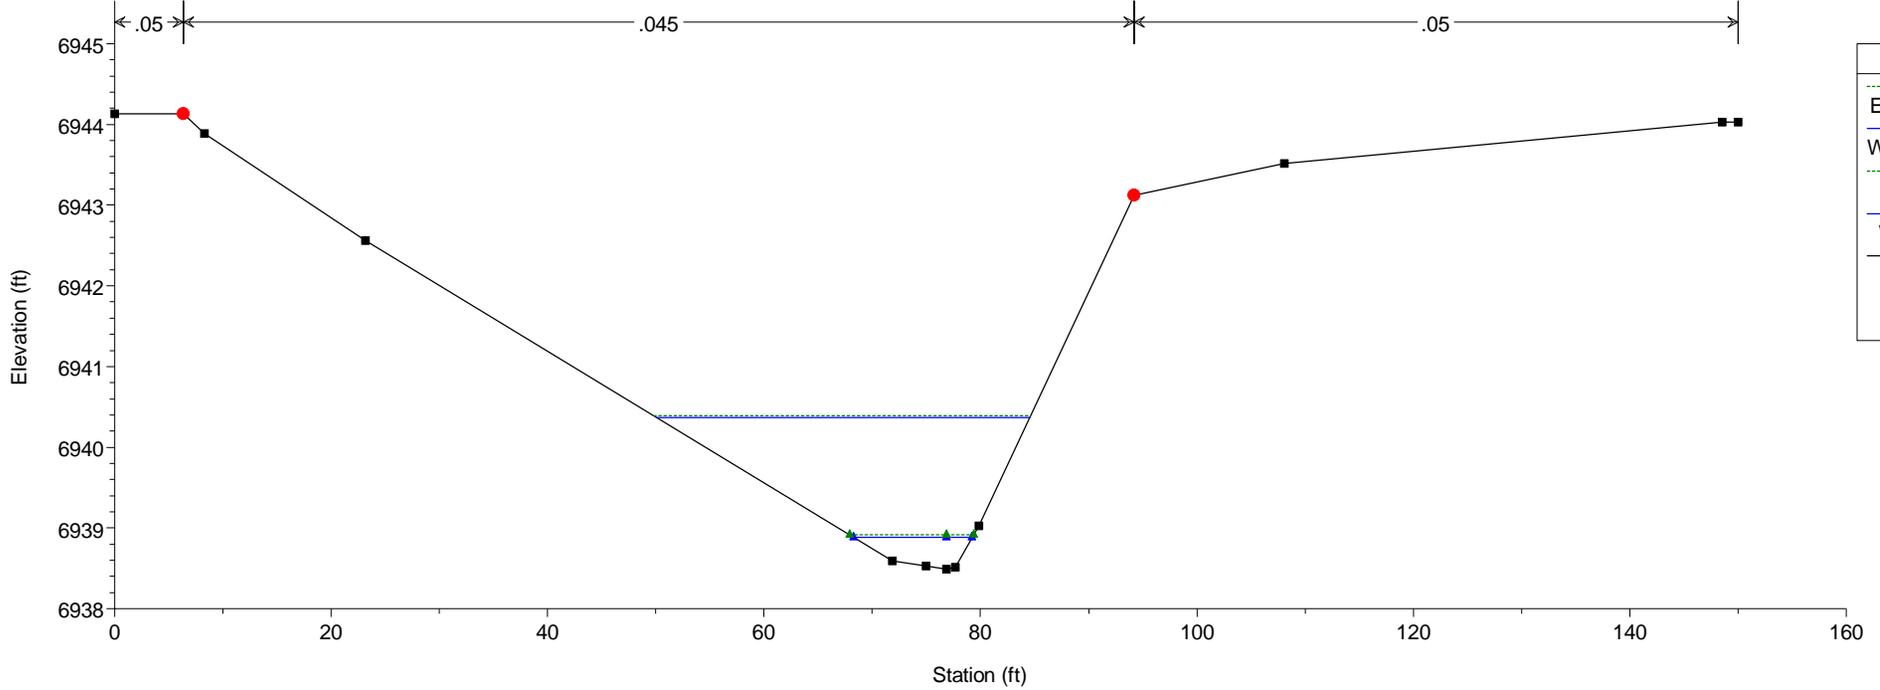


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3950

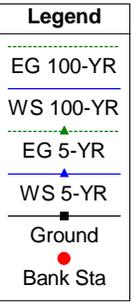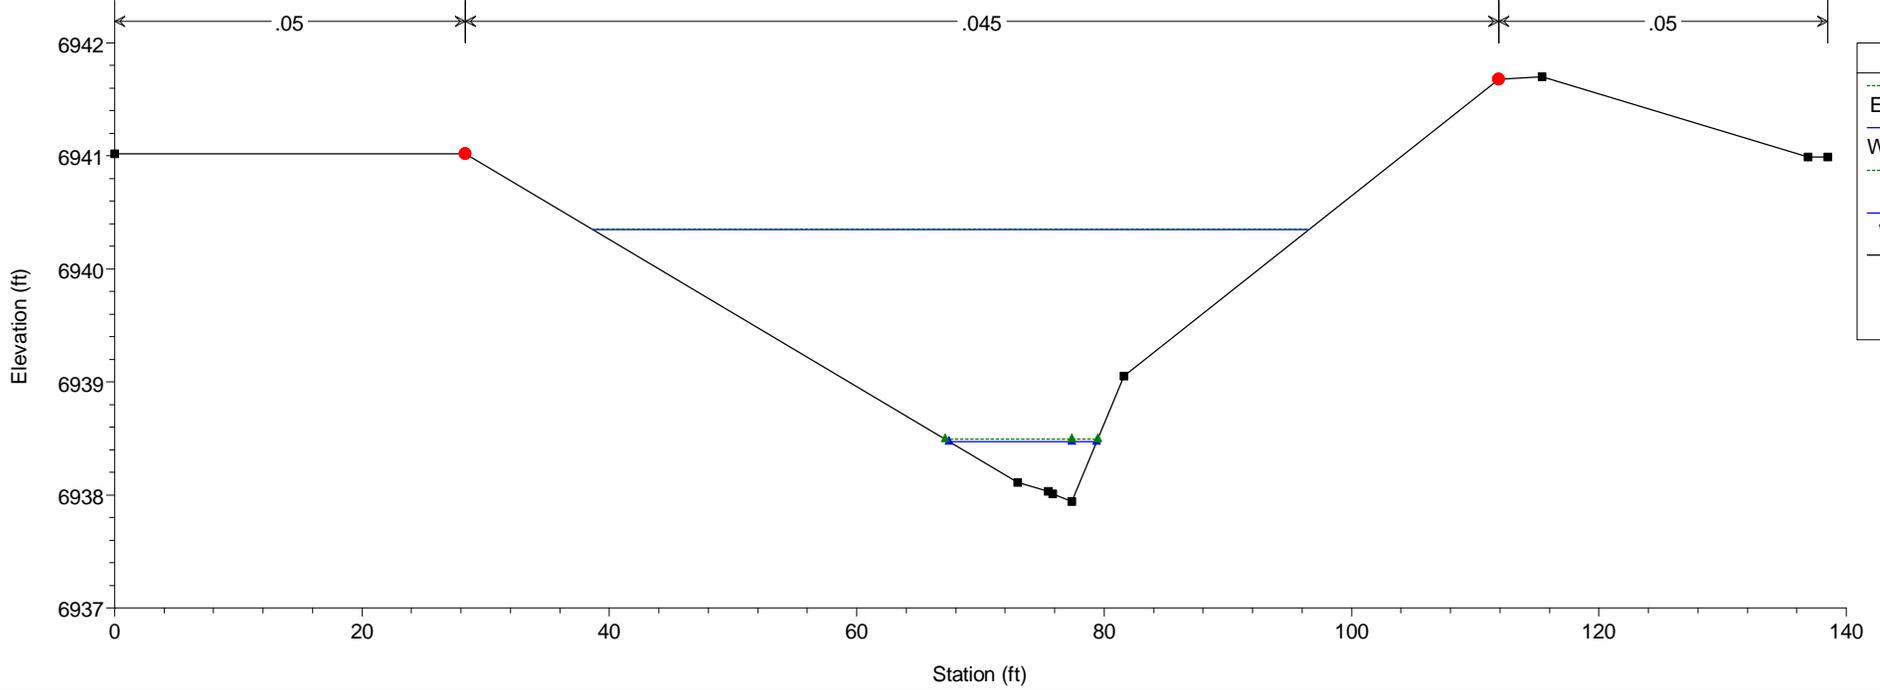


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3900

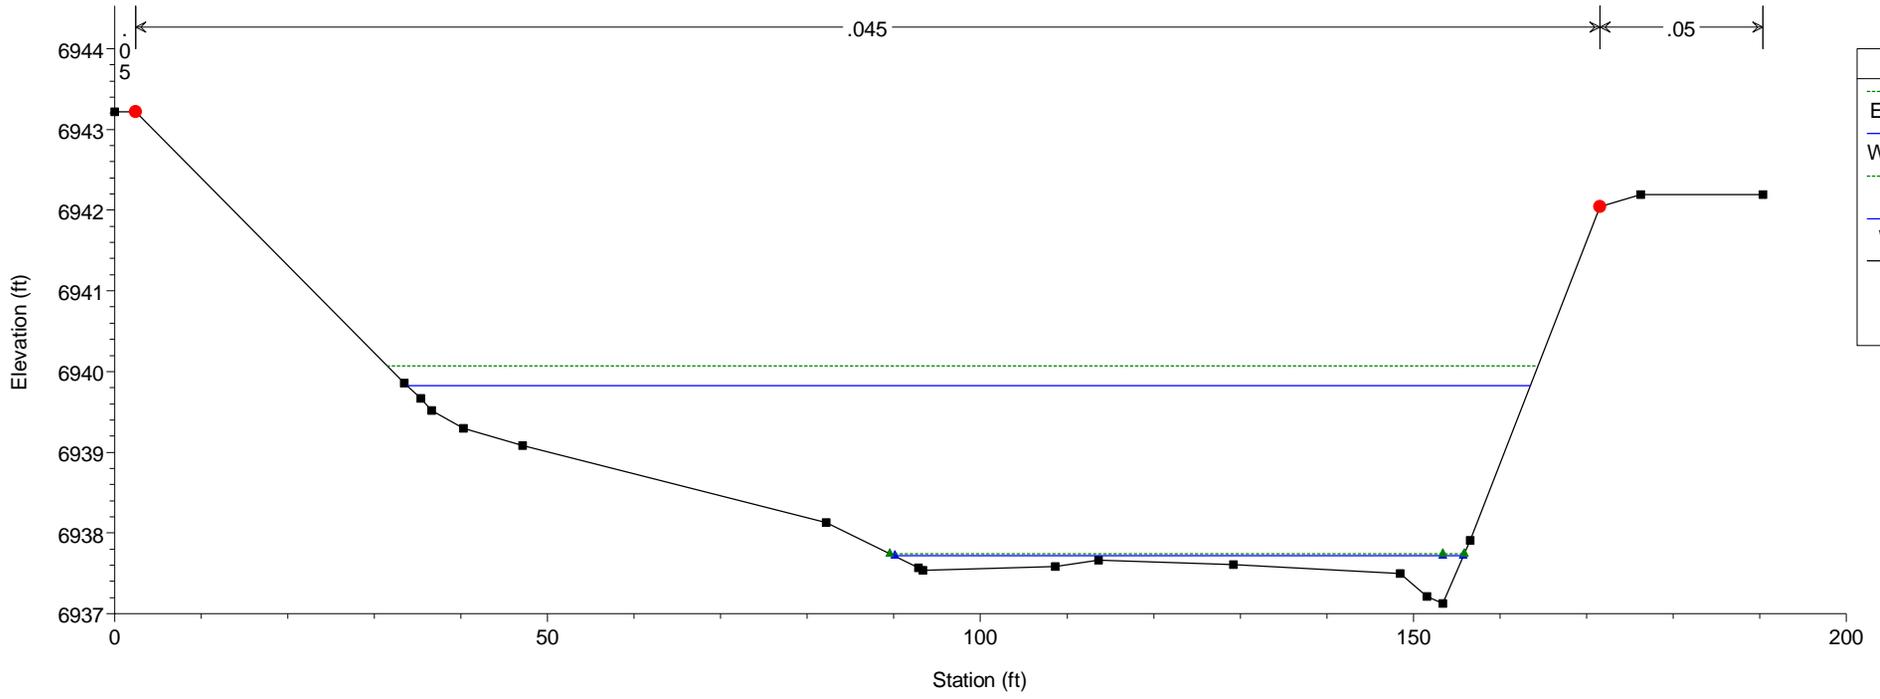


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3850

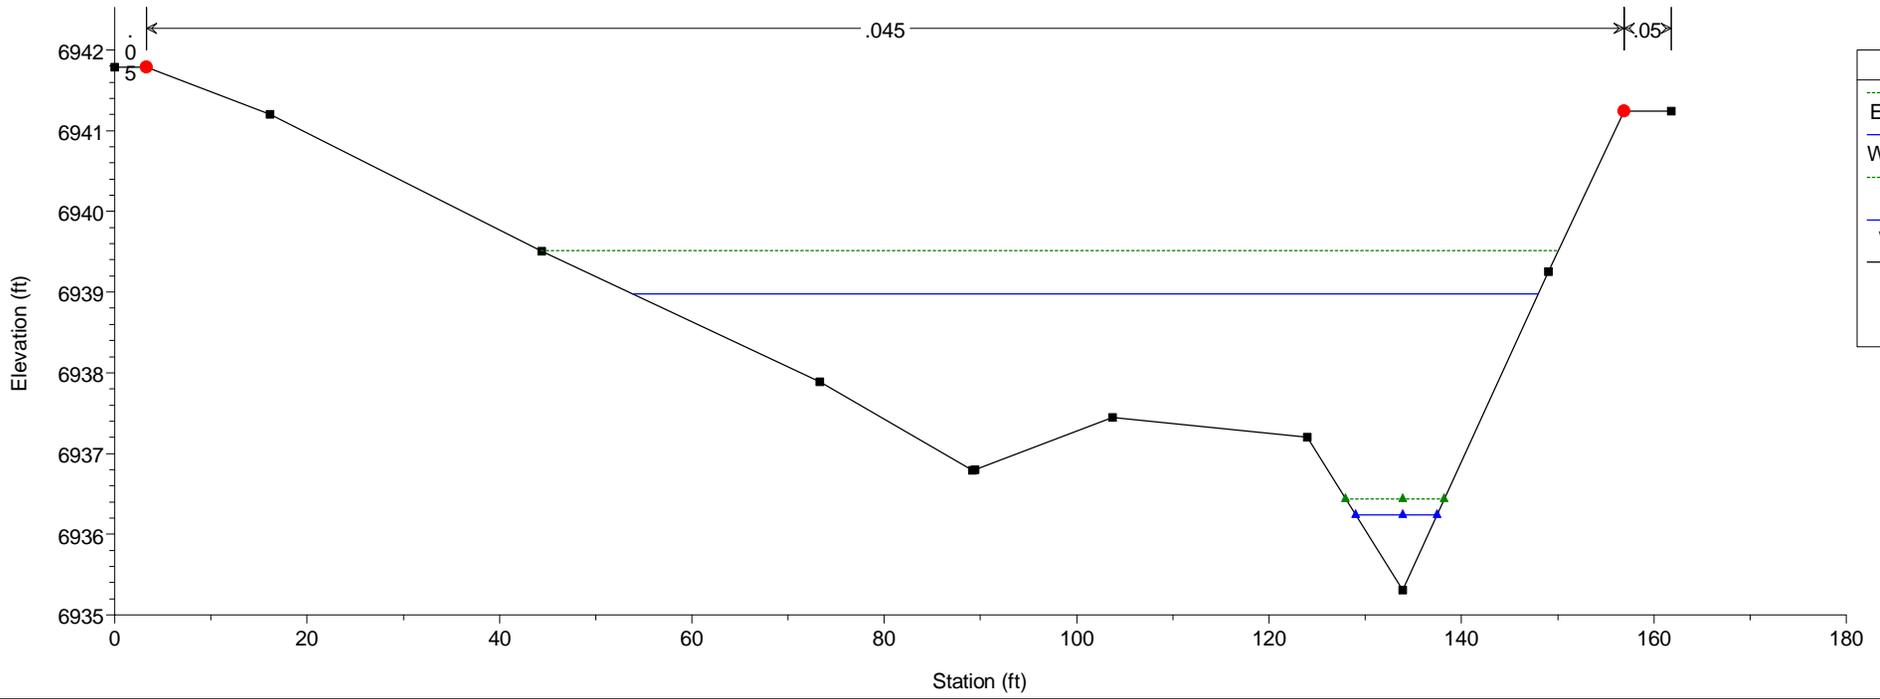

HEC-RAS Model Plan: Existing 5/21/2019
RS = 3800

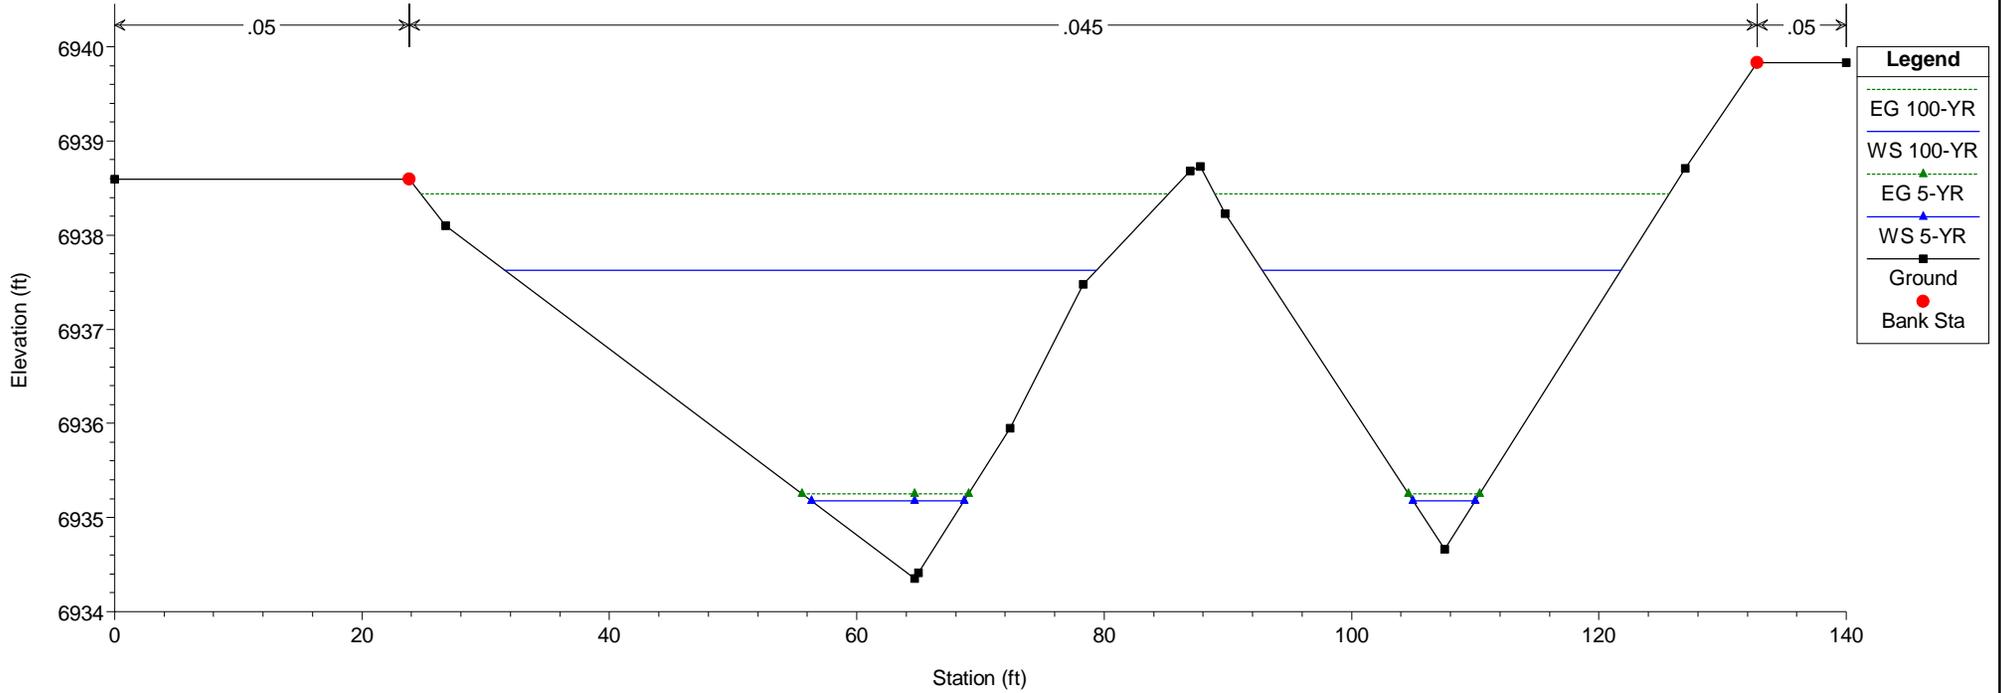


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3750

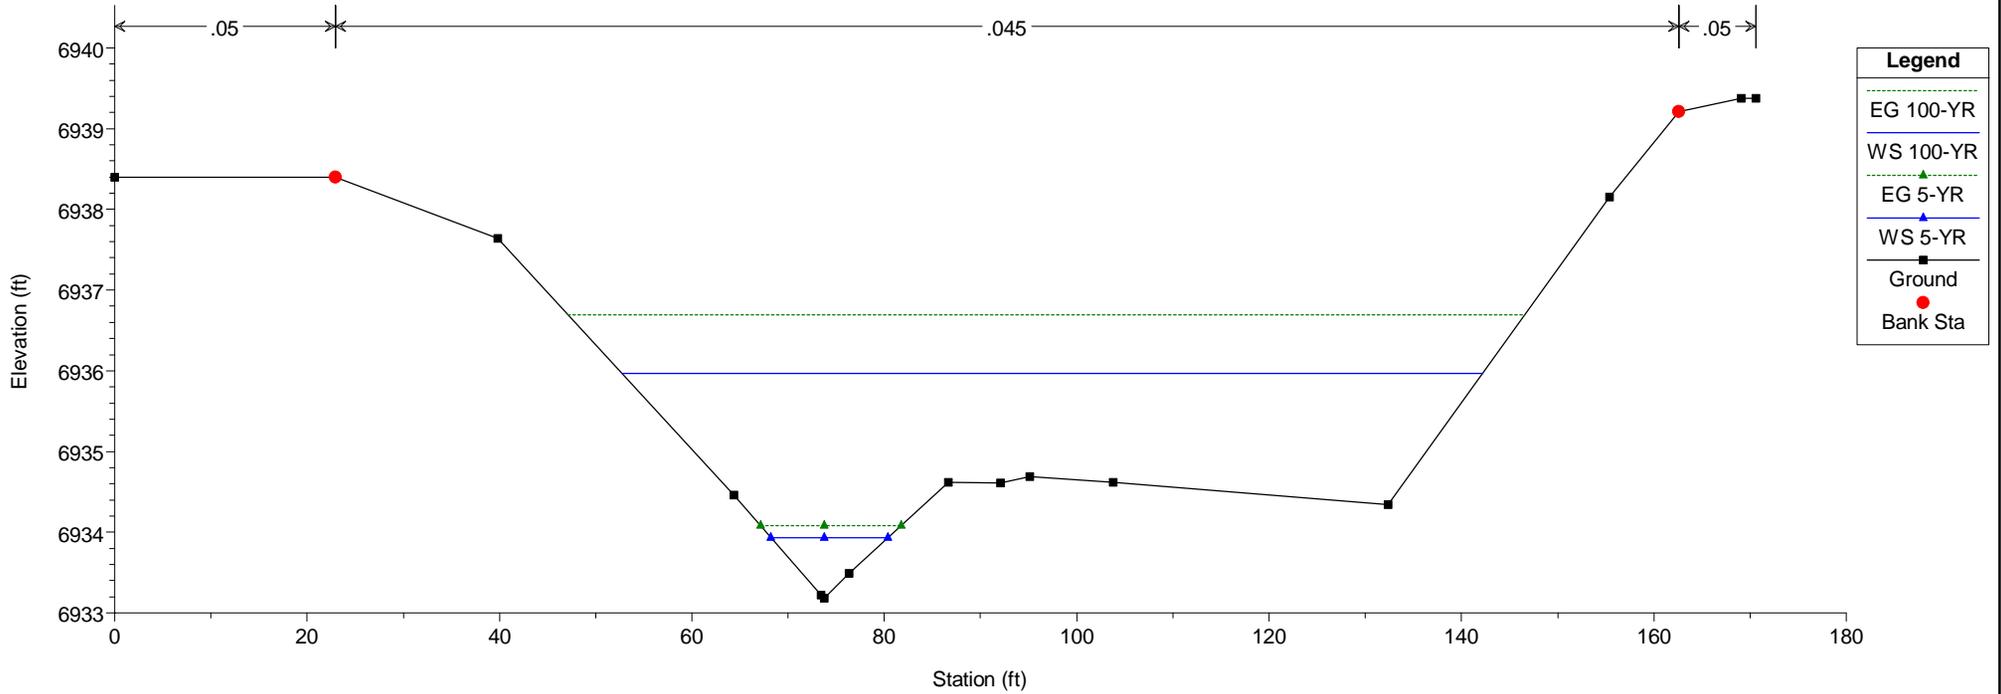

HEC-RAS Model Plan: Existing 5/21/2019

RS = 3700

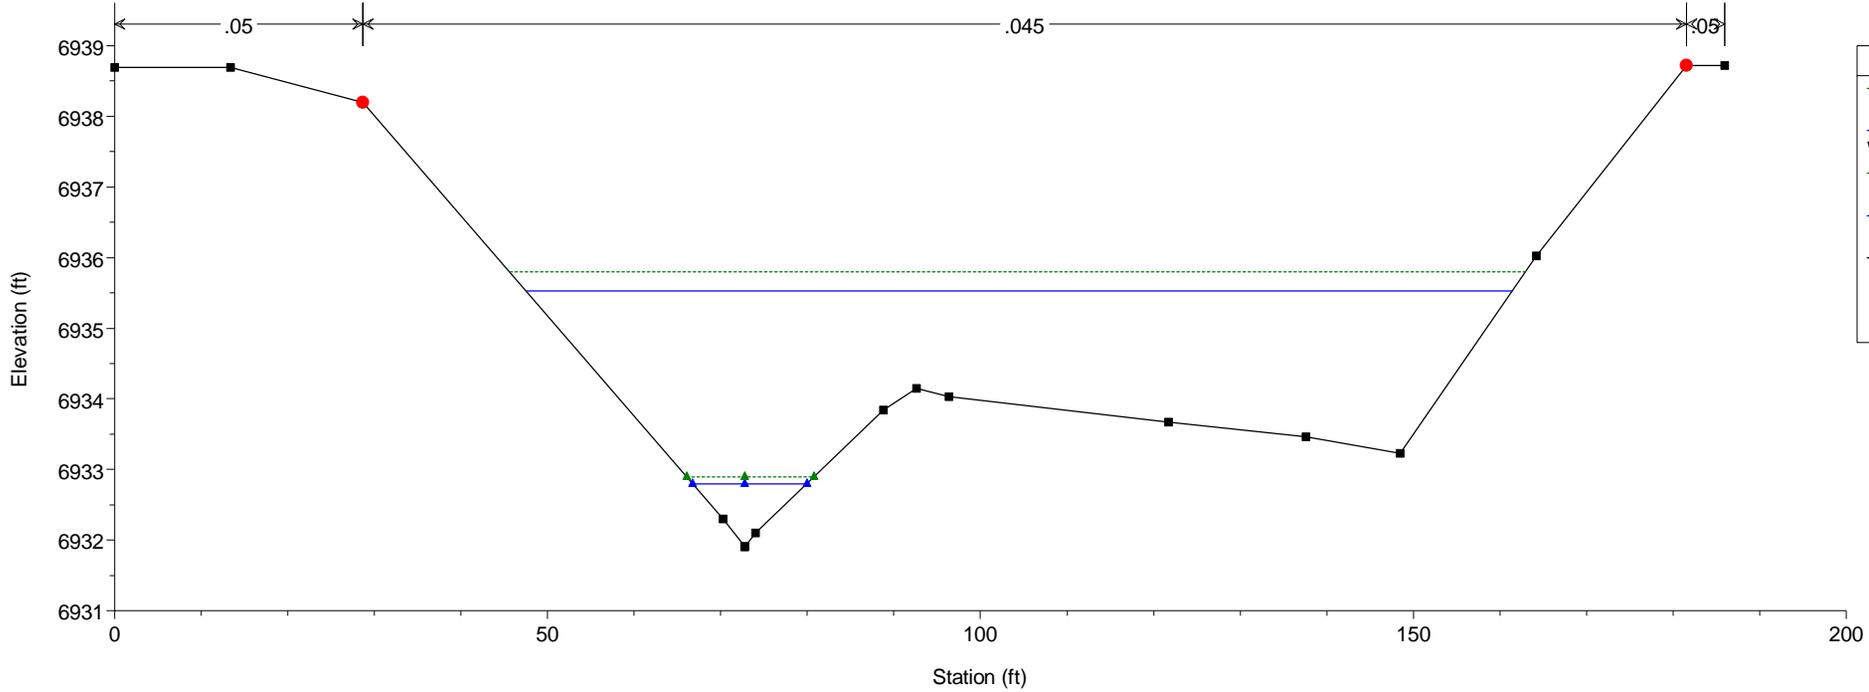


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019


RS = 3650

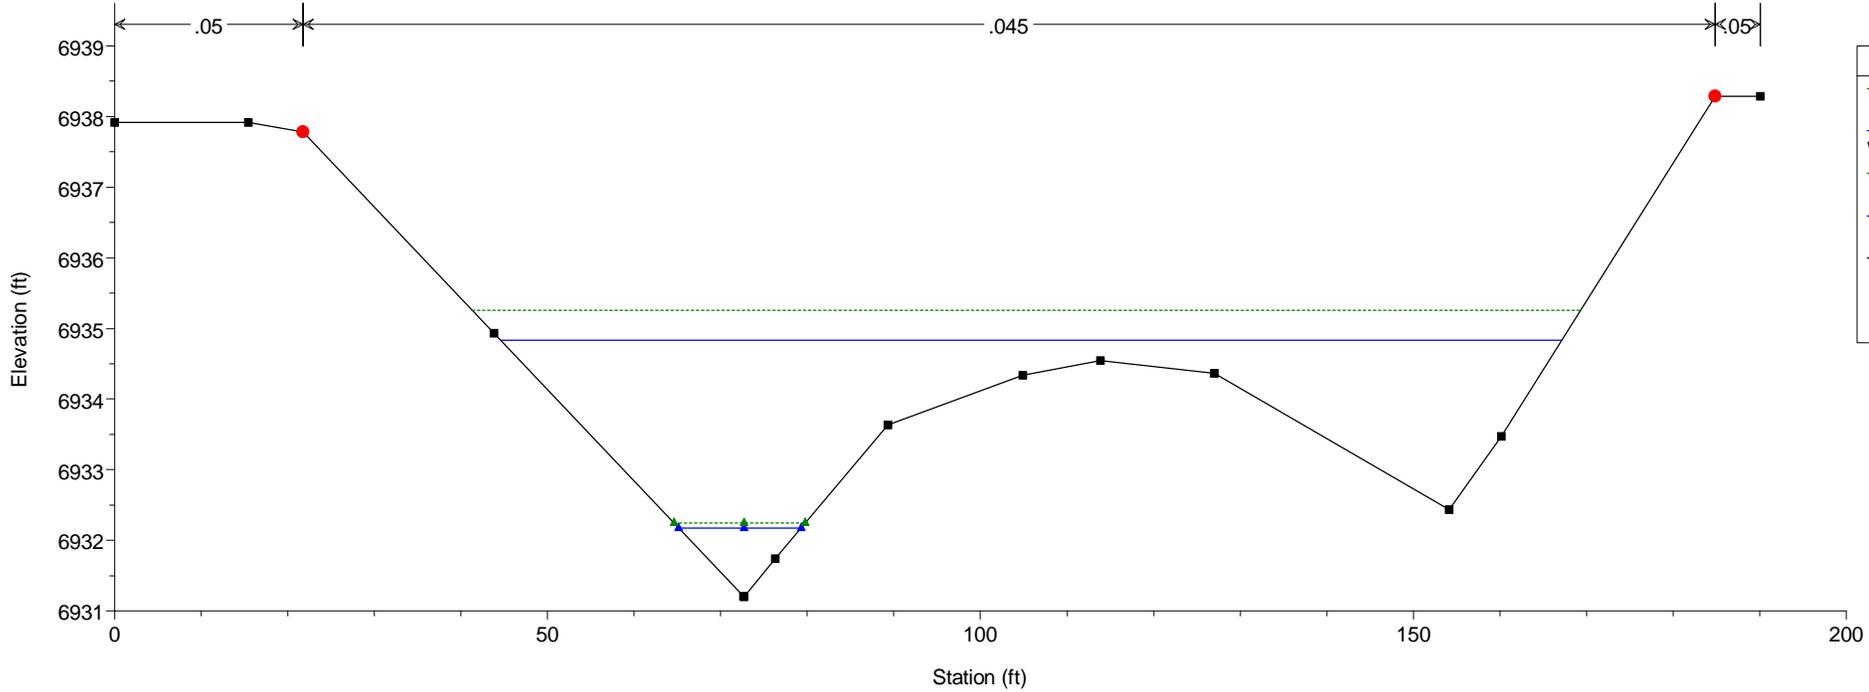

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3600

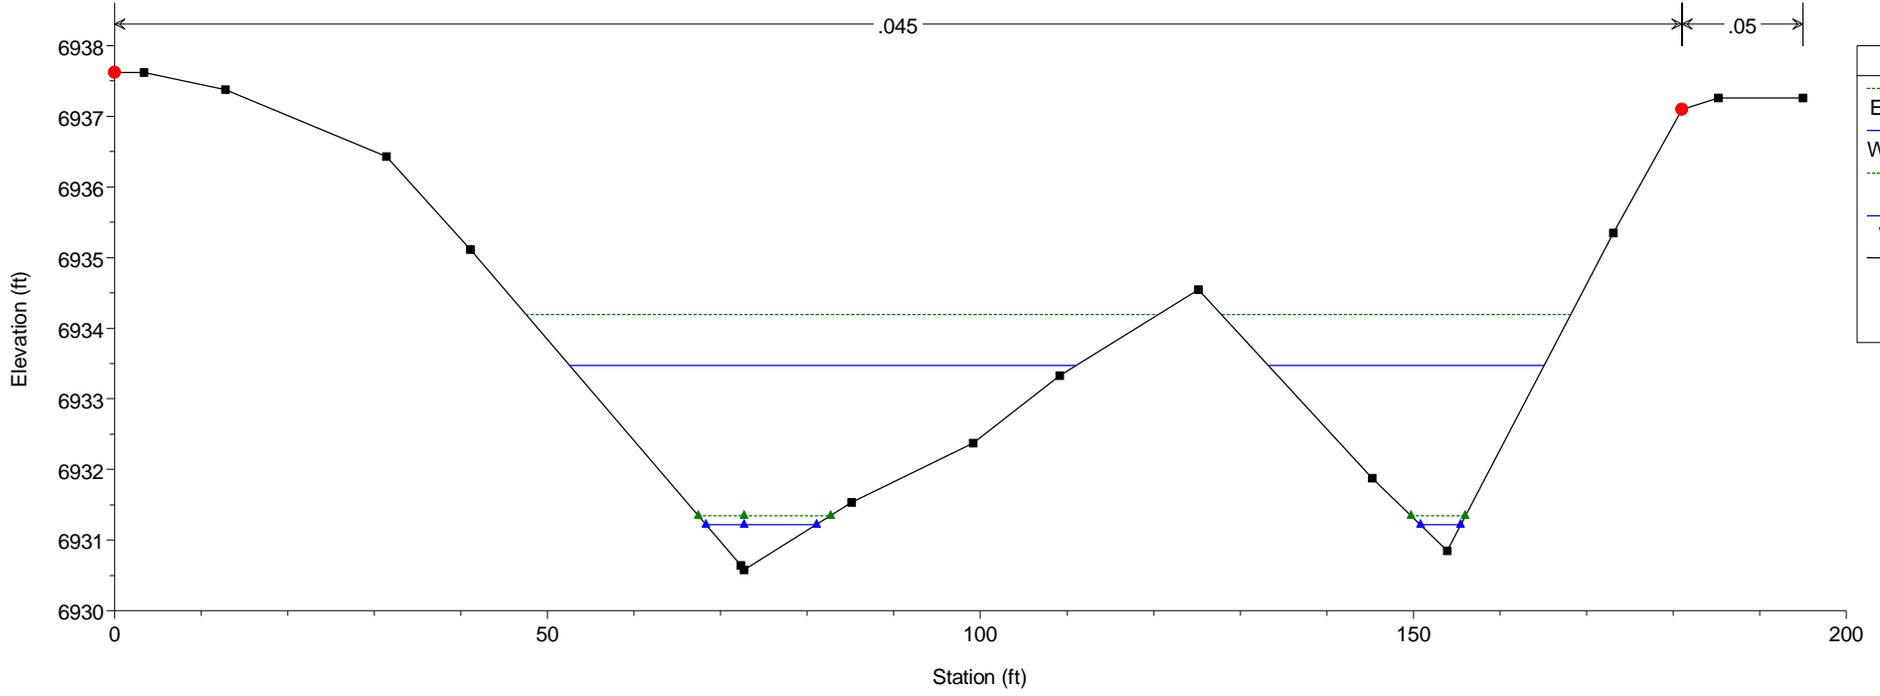

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3550

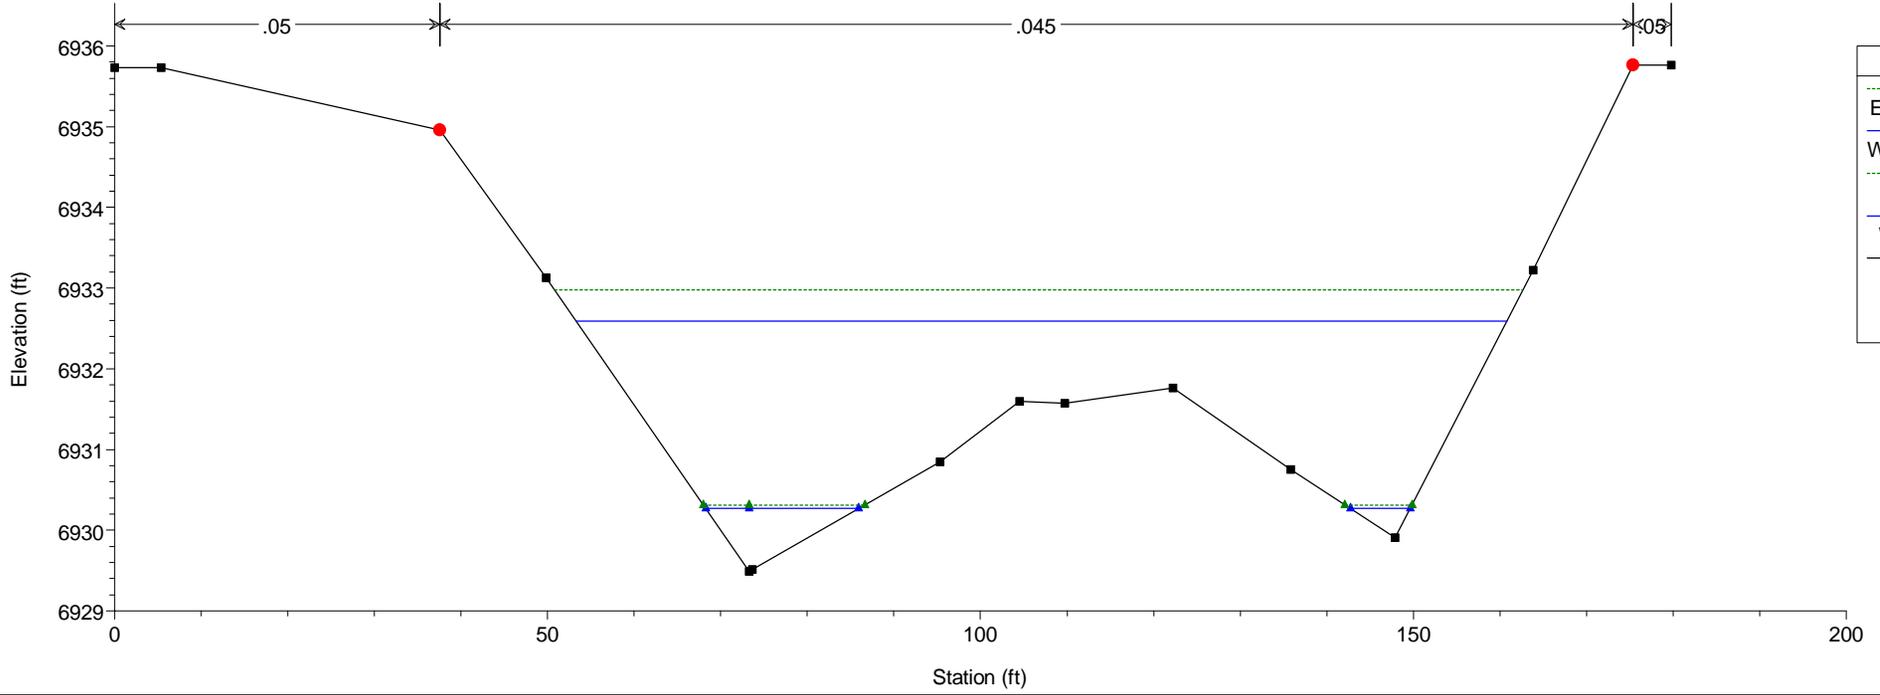


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019
RS = 3500


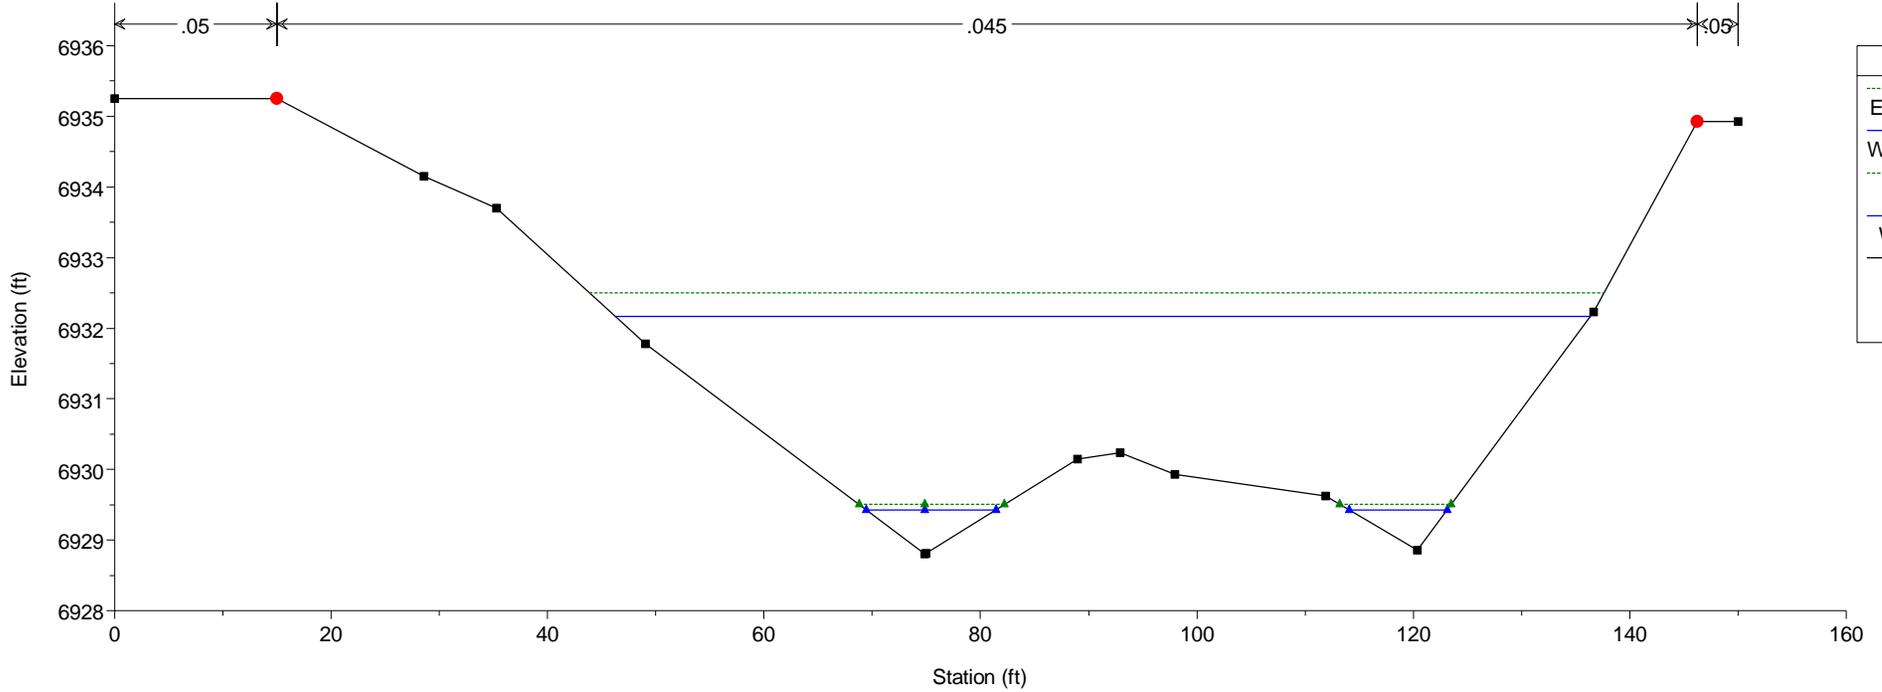


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3450

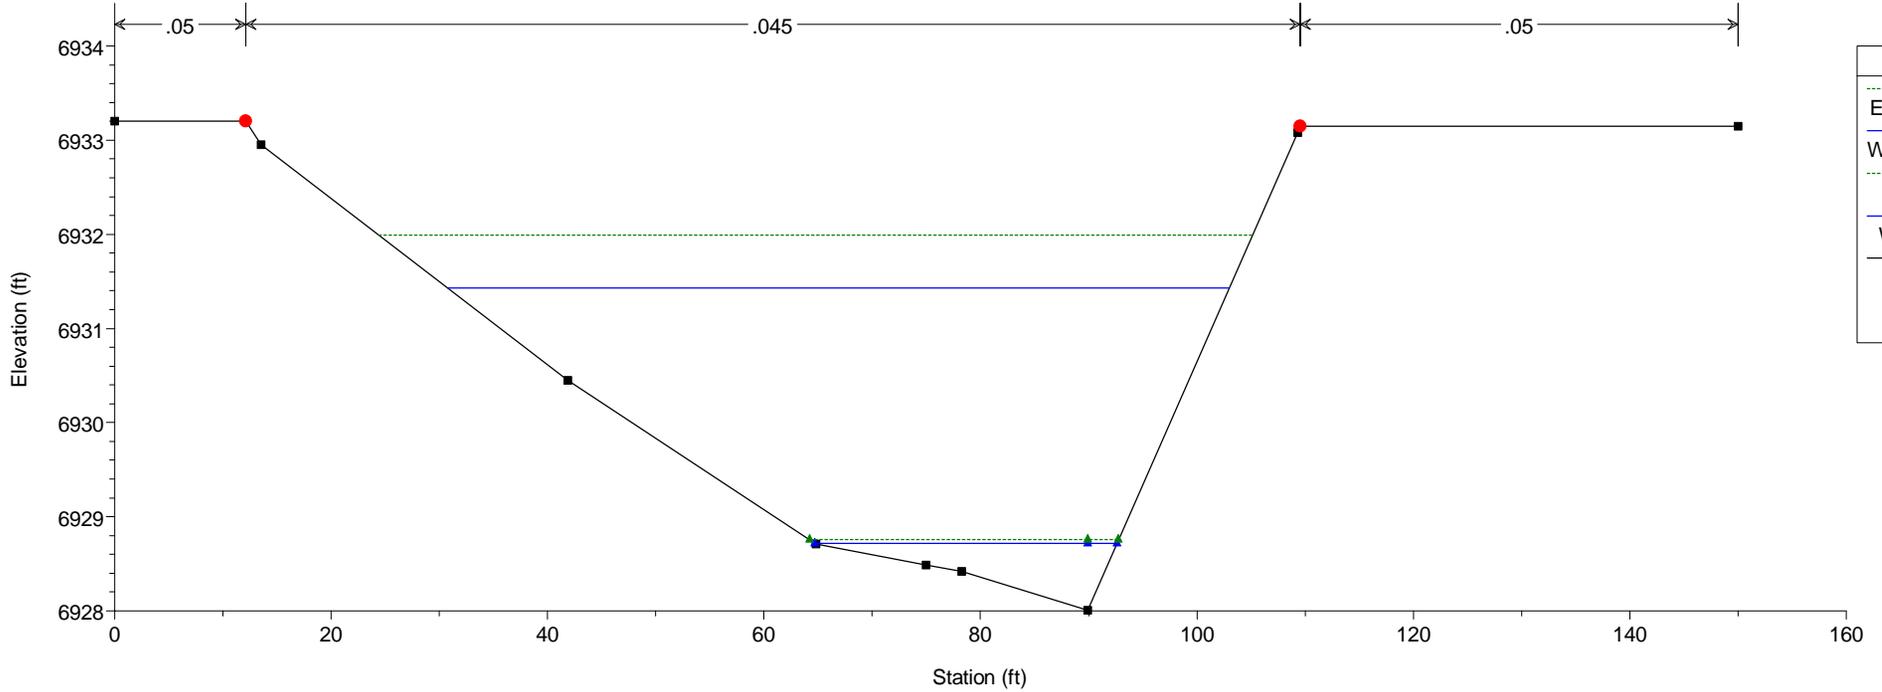



HEC-RAS Model Plan: Existing 5/21/2019

RS = 3400

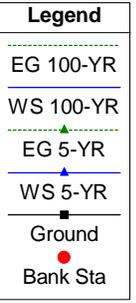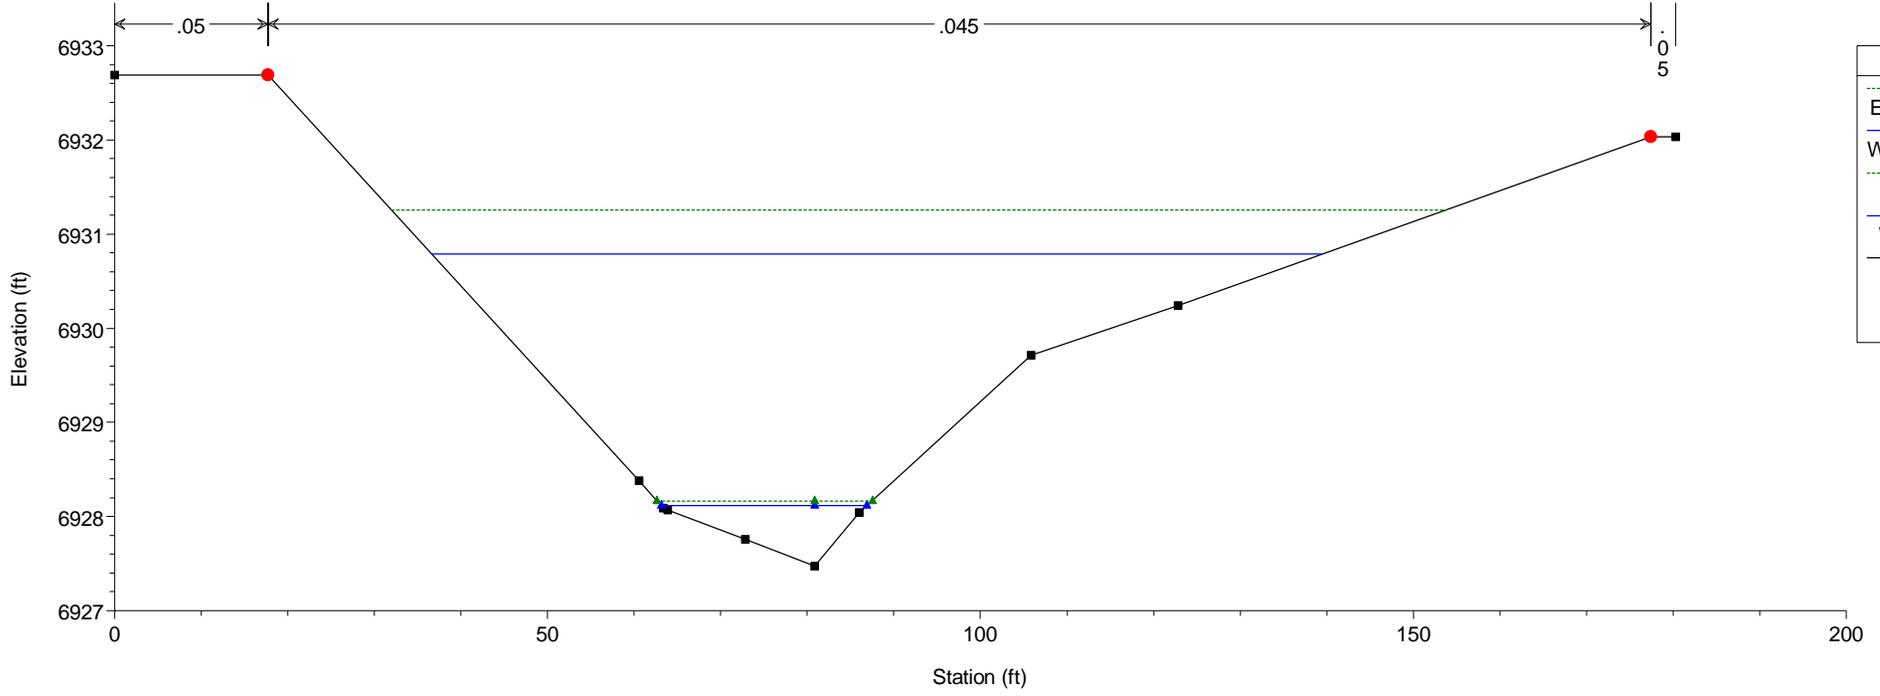


HEC-RAS Model Plan: Existing 5/21/2019

RS = 3350

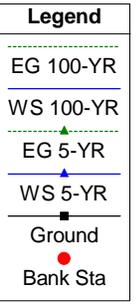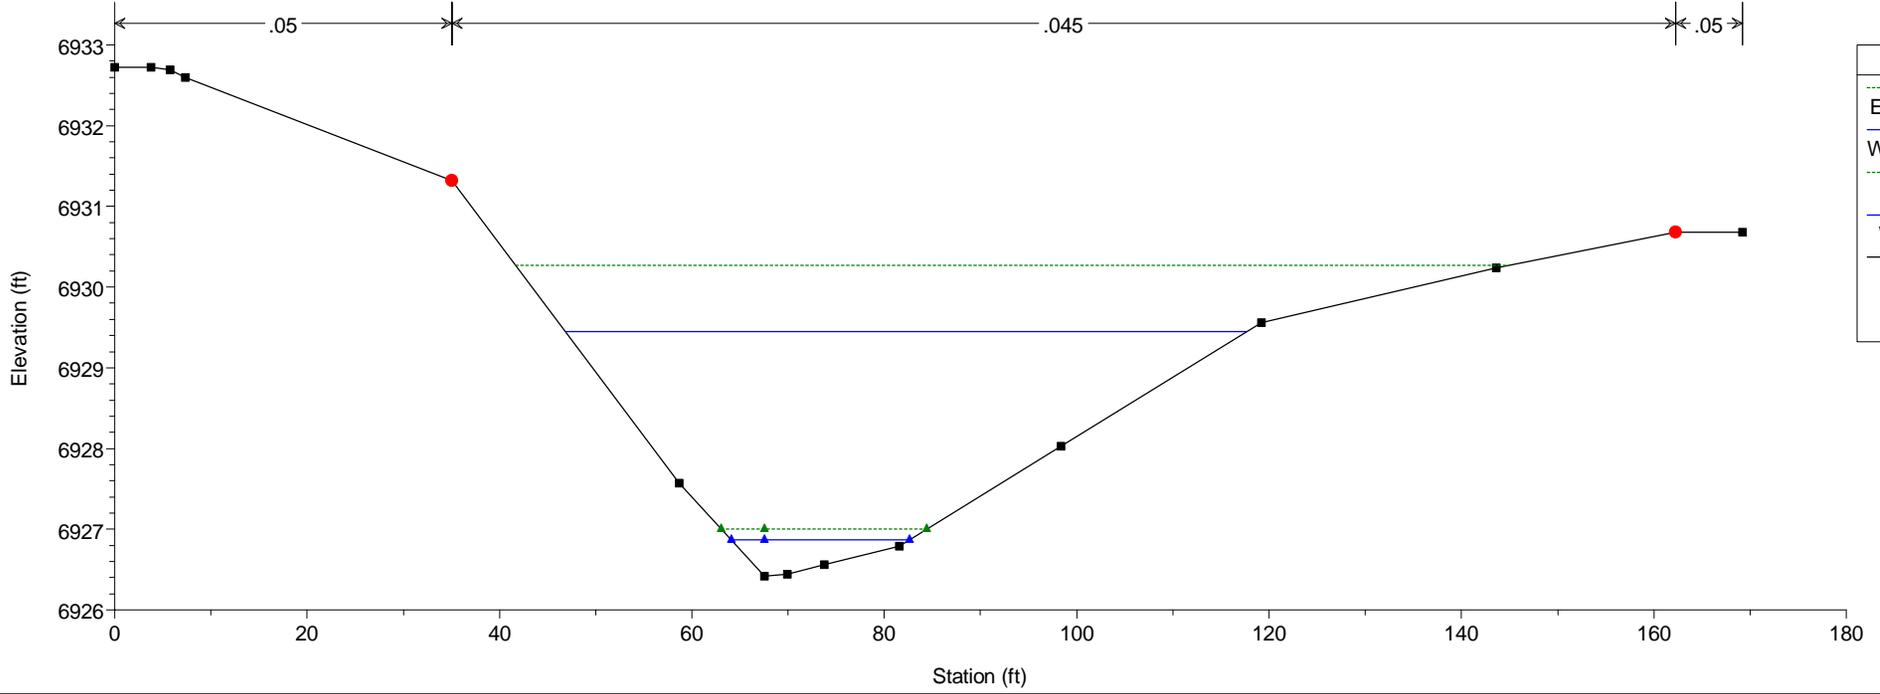


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3300

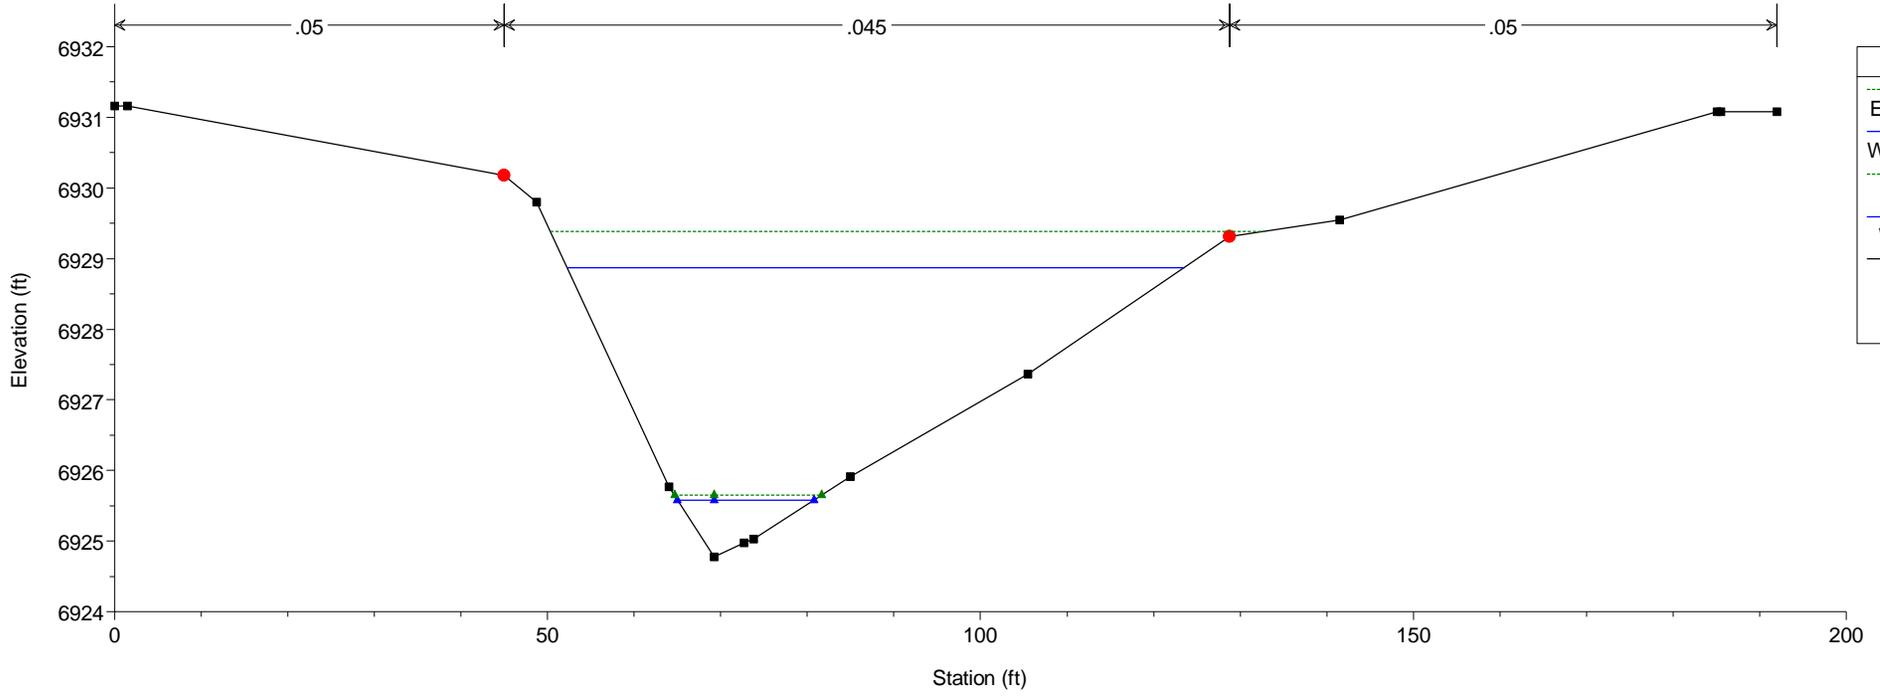

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019
RS = 3250


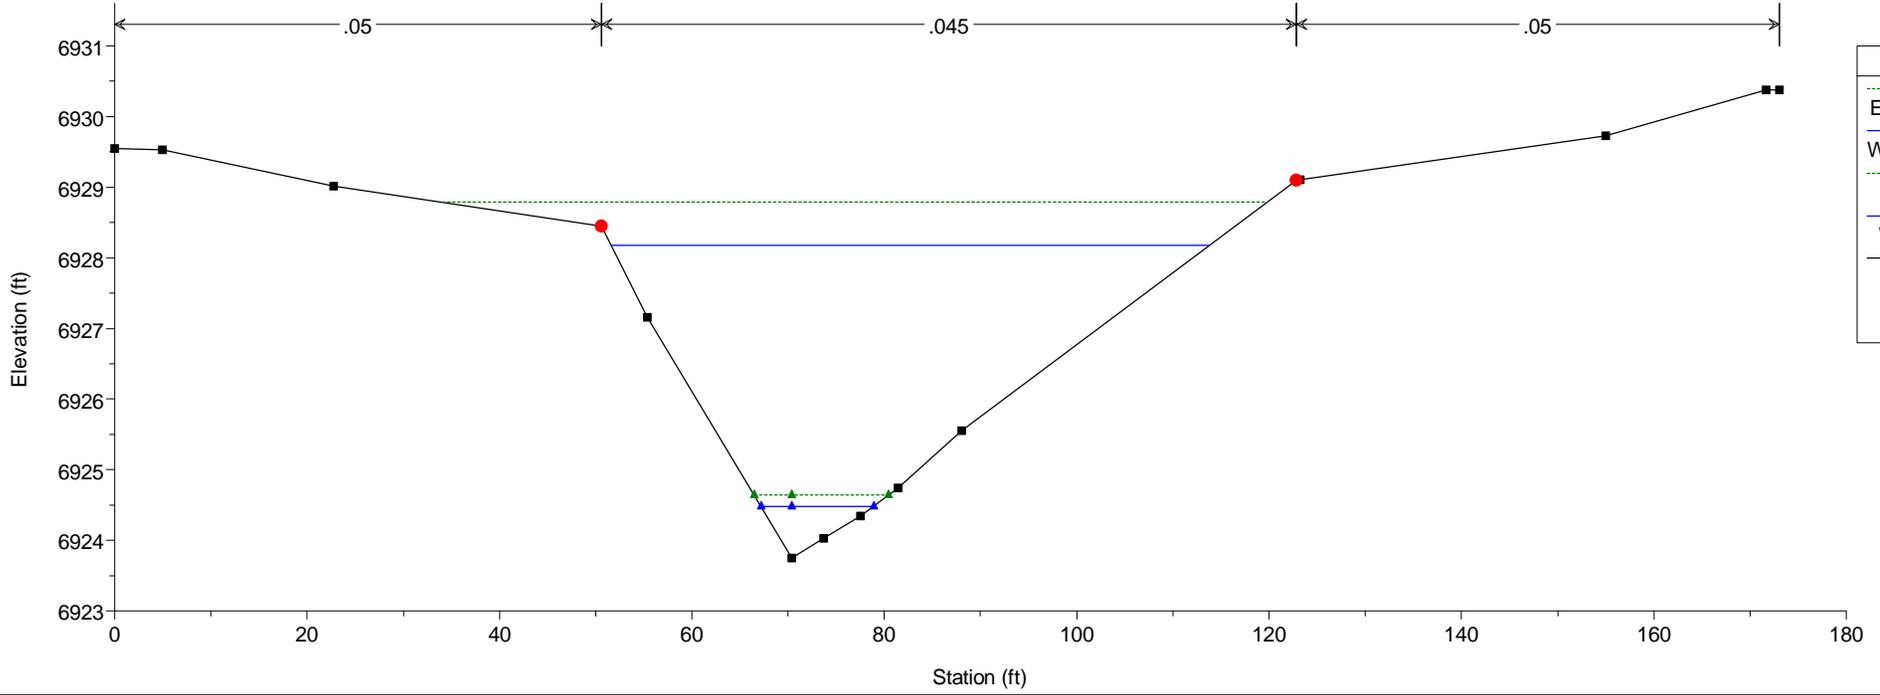


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta



HEC-RAS Model Plan: Existing 5/21/2019

RS = 3200

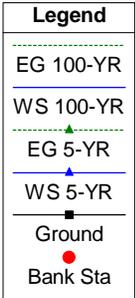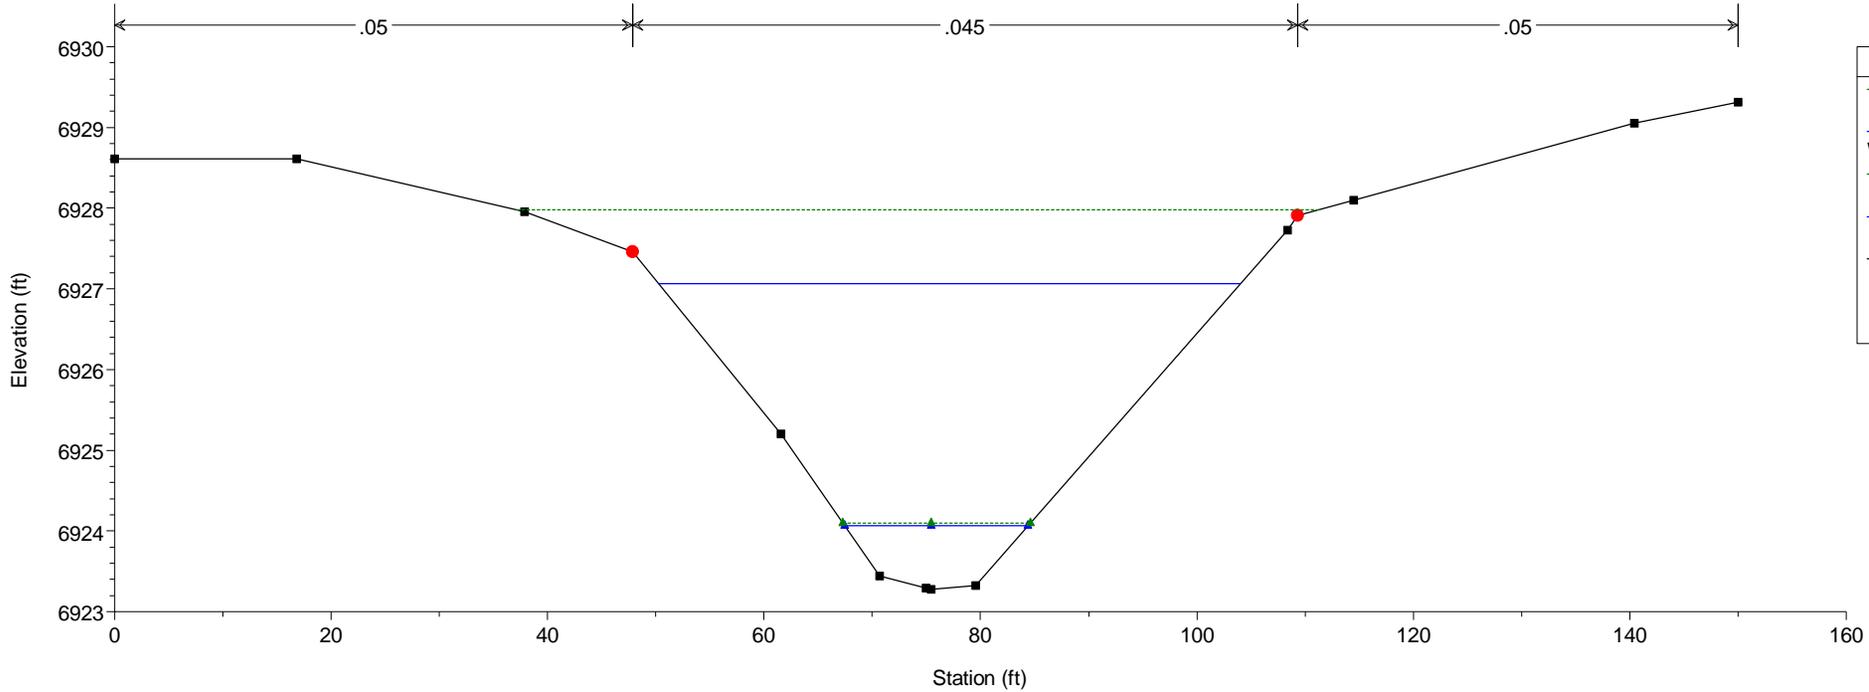


HEC-RAS Model Plan: Existing 5/21/2019


RS = 3150

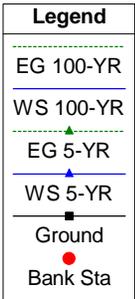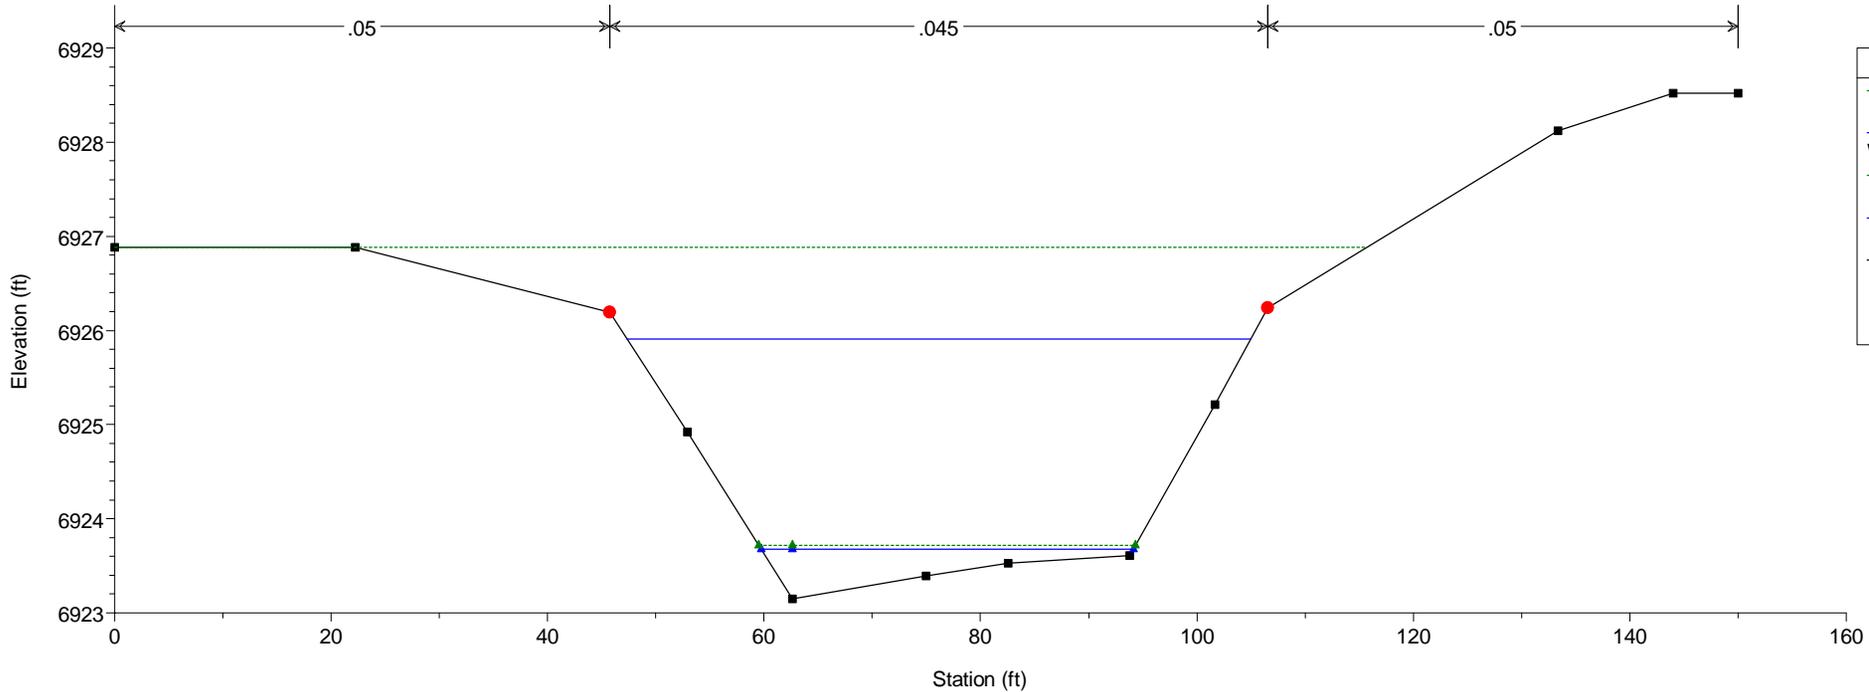


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3100

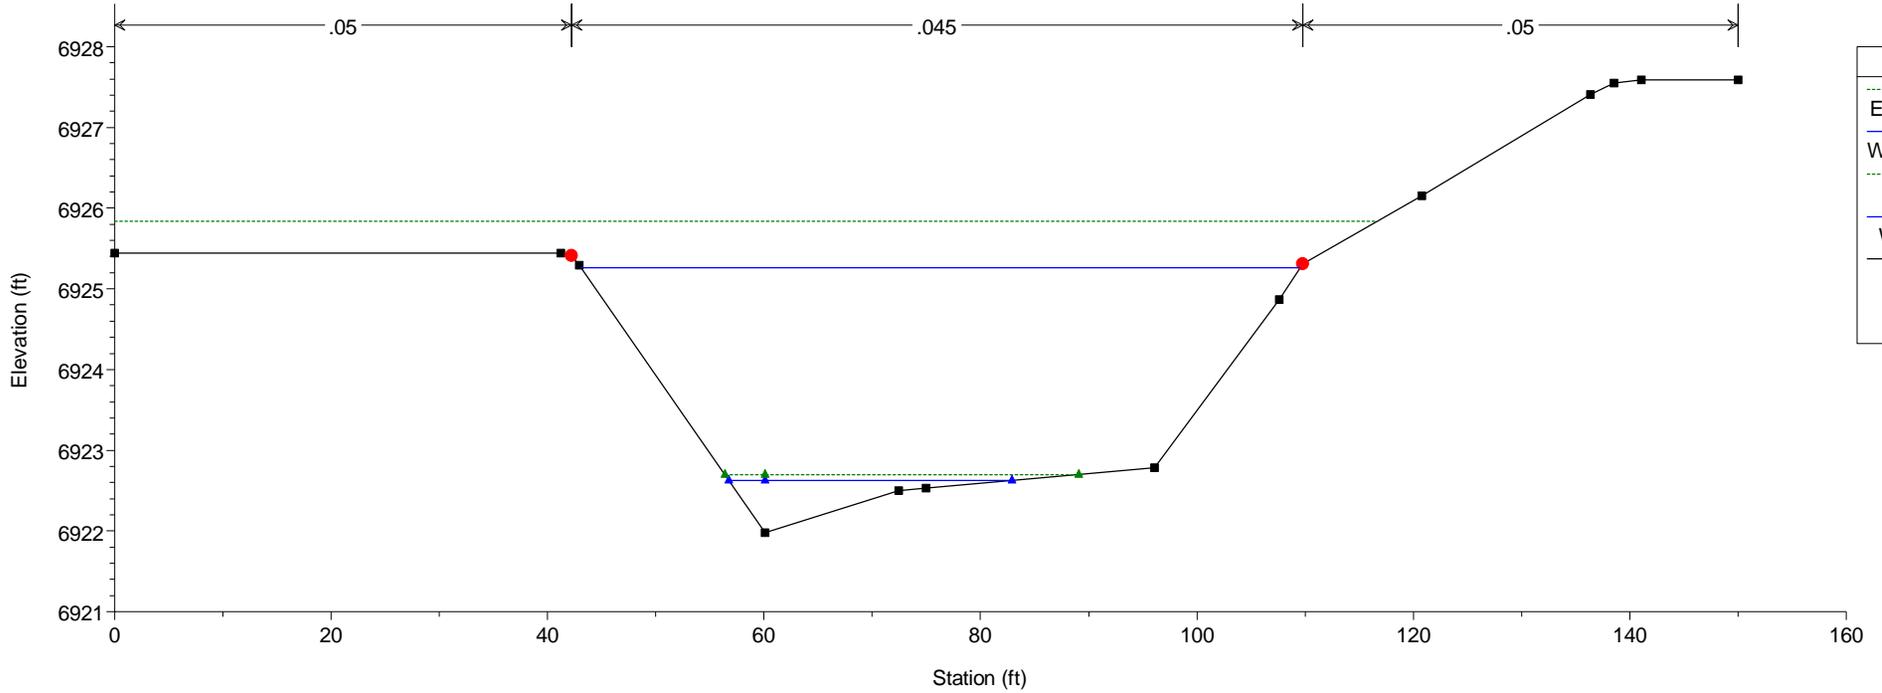


HEC-RAS Model Plan: Existing 5/21/2019
RS = 3050

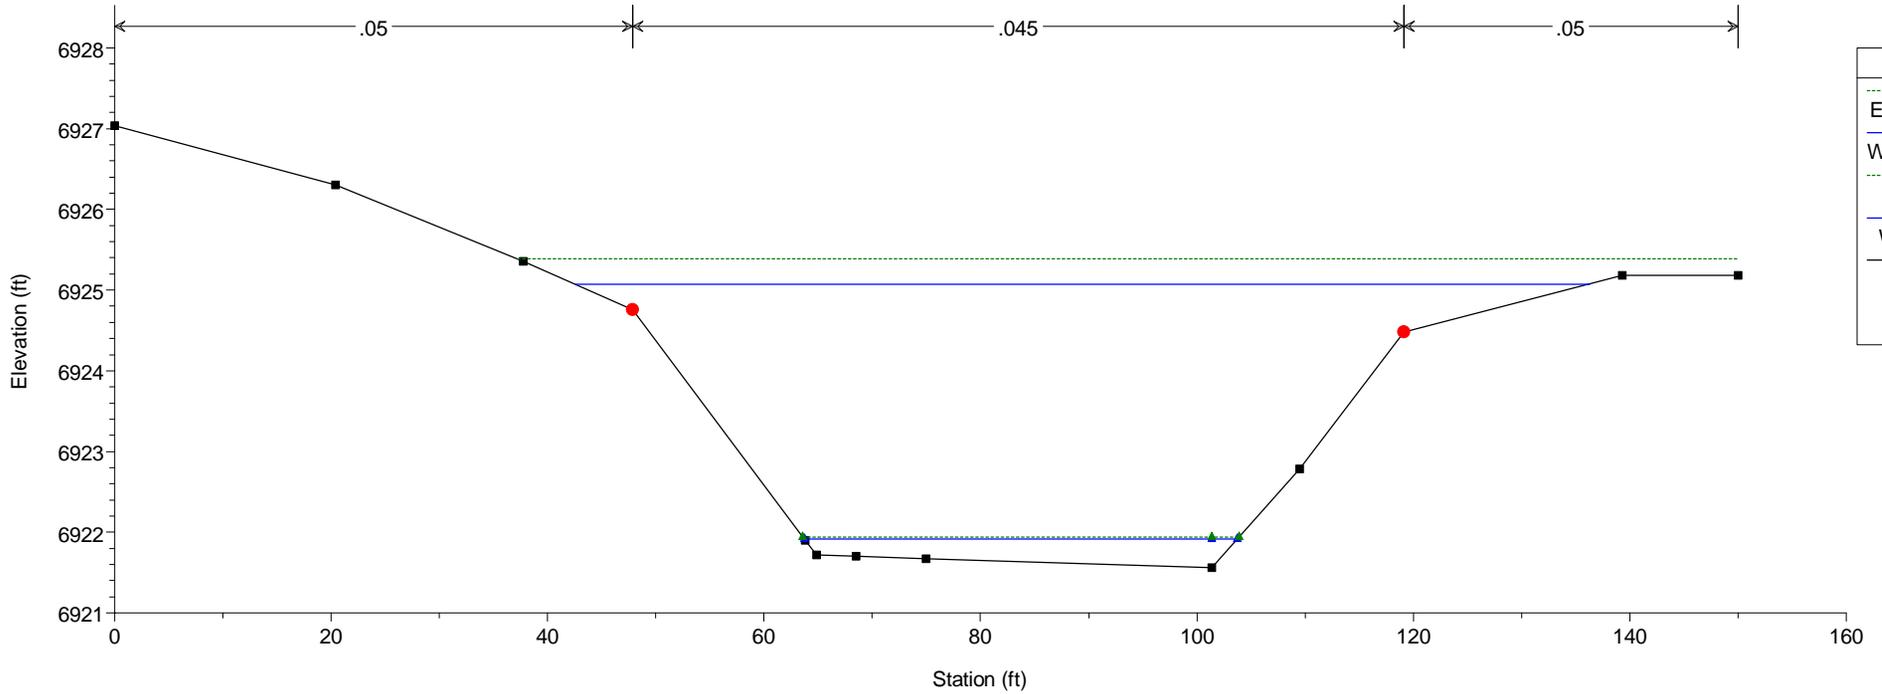

HEC-RAS Model Plan: Existing 5/21/2019
RS = 3000

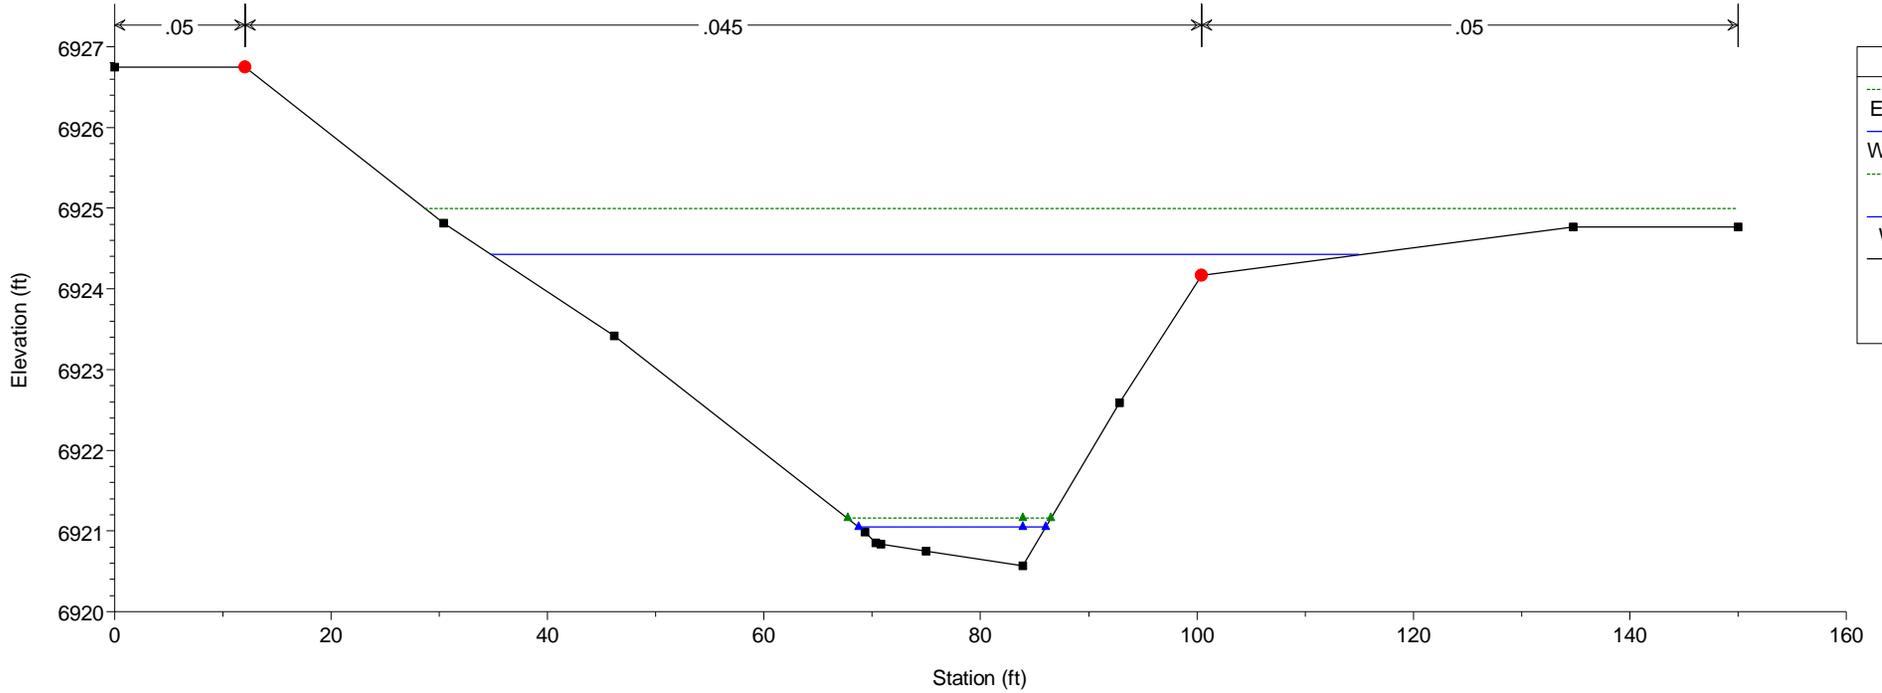

HEC-RAS Model Plan: Existing 5/21/2019
RS = 2950


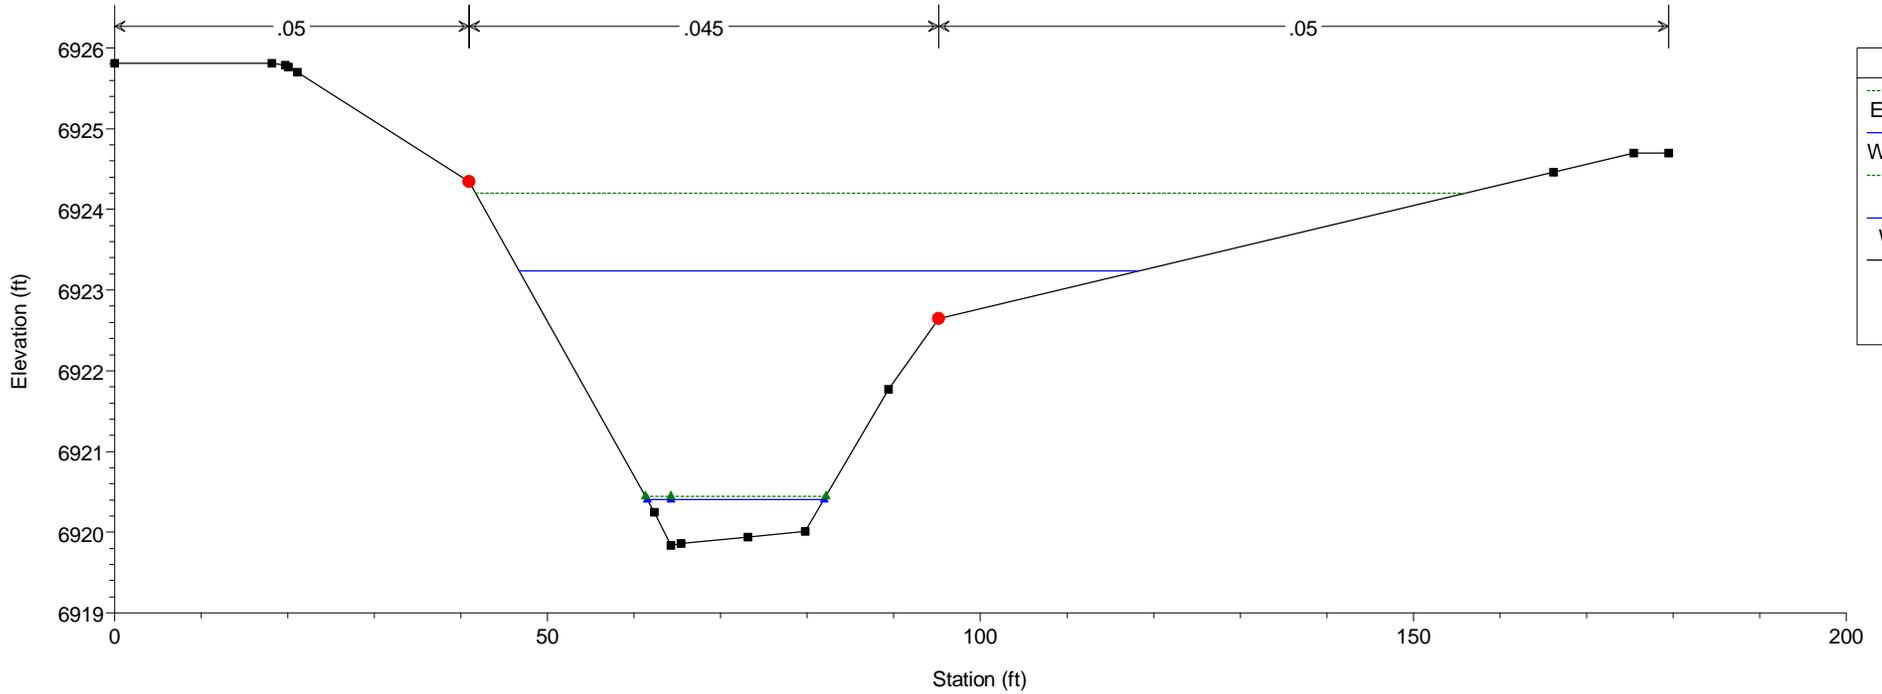


Legend


- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

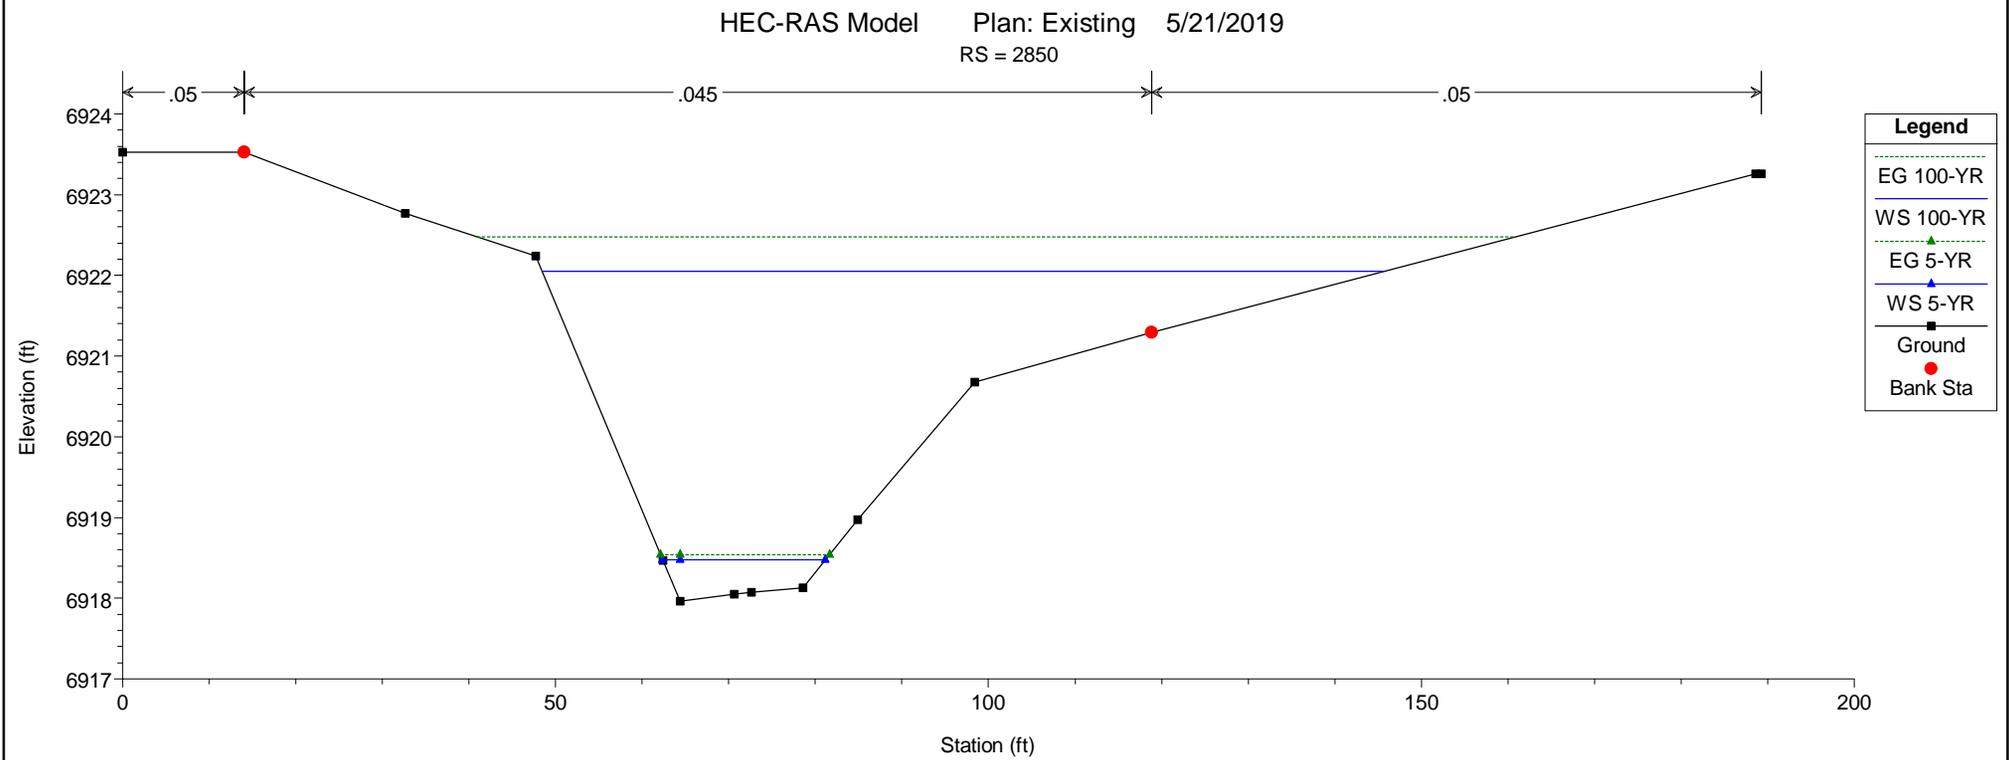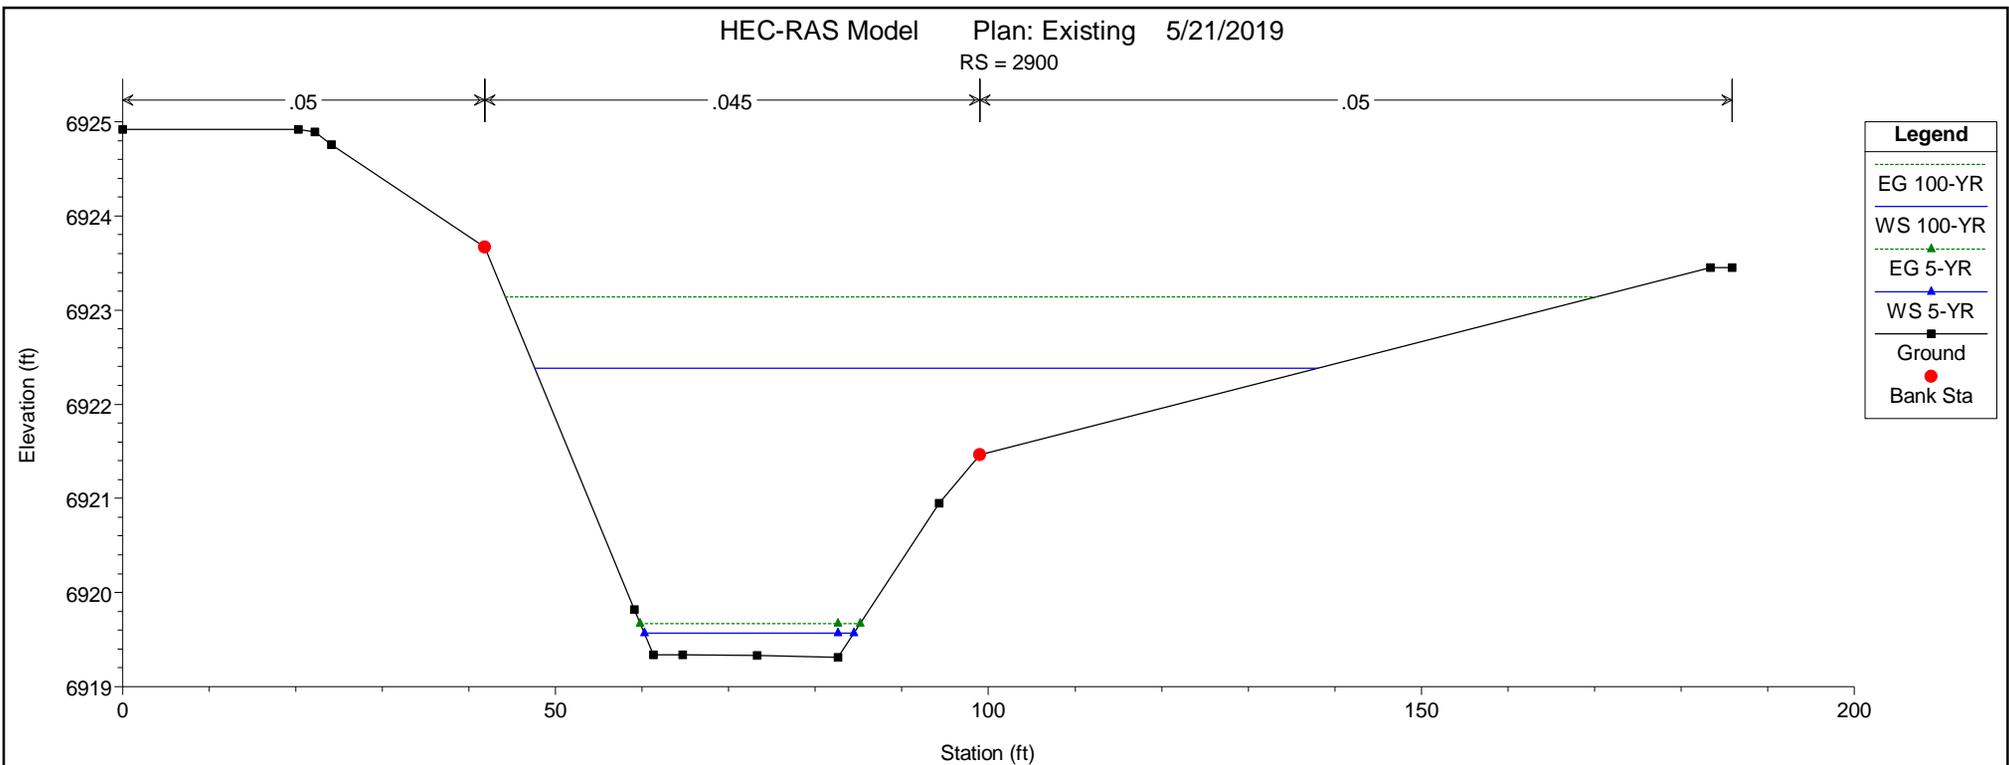


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2800

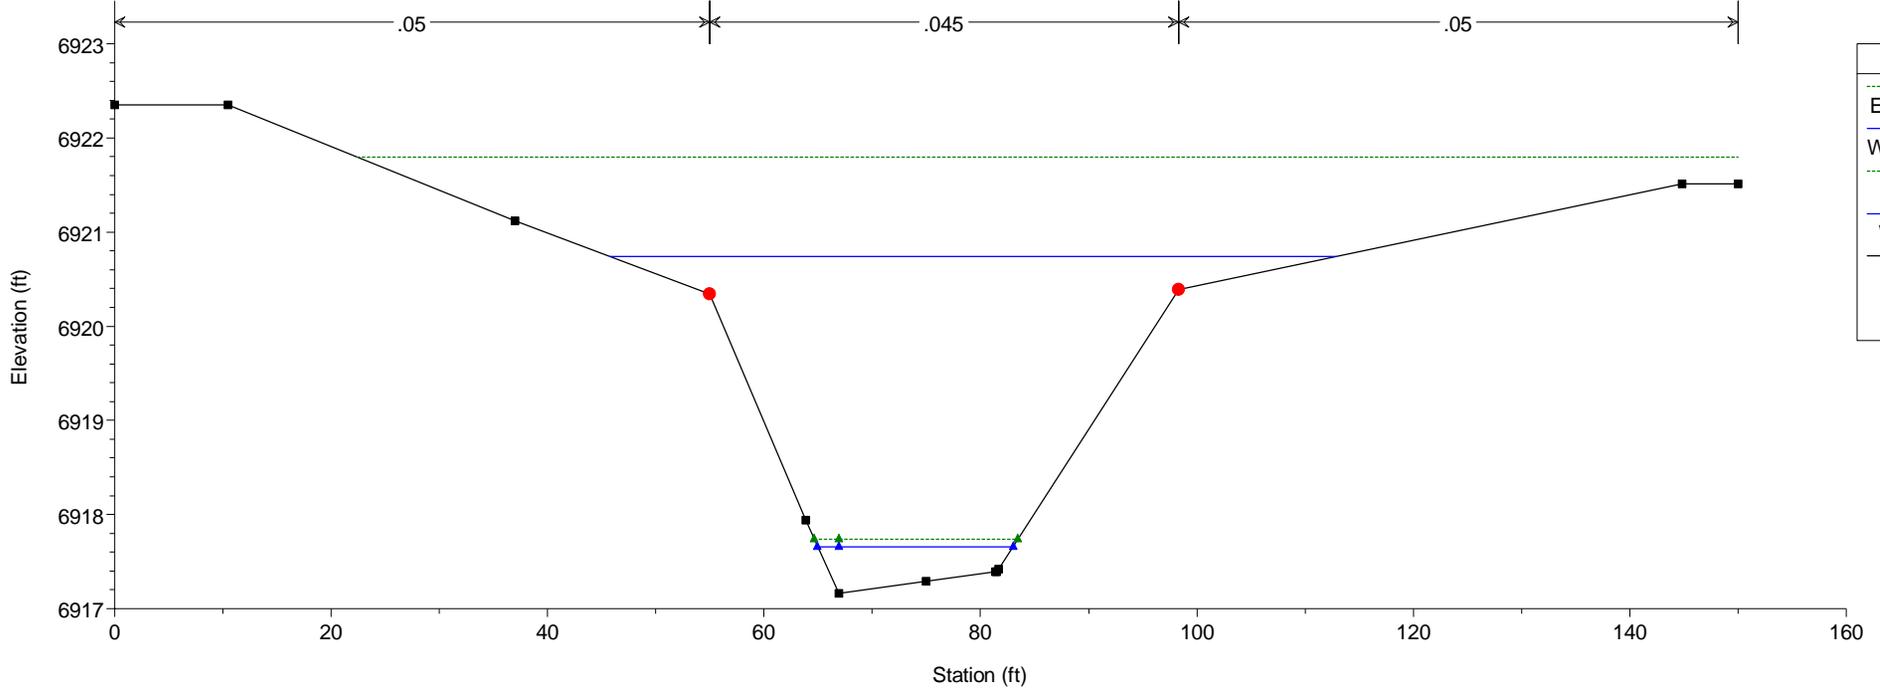

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta



HEC-RAS Model Plan: Existing 5/21/2019
RS = 2750

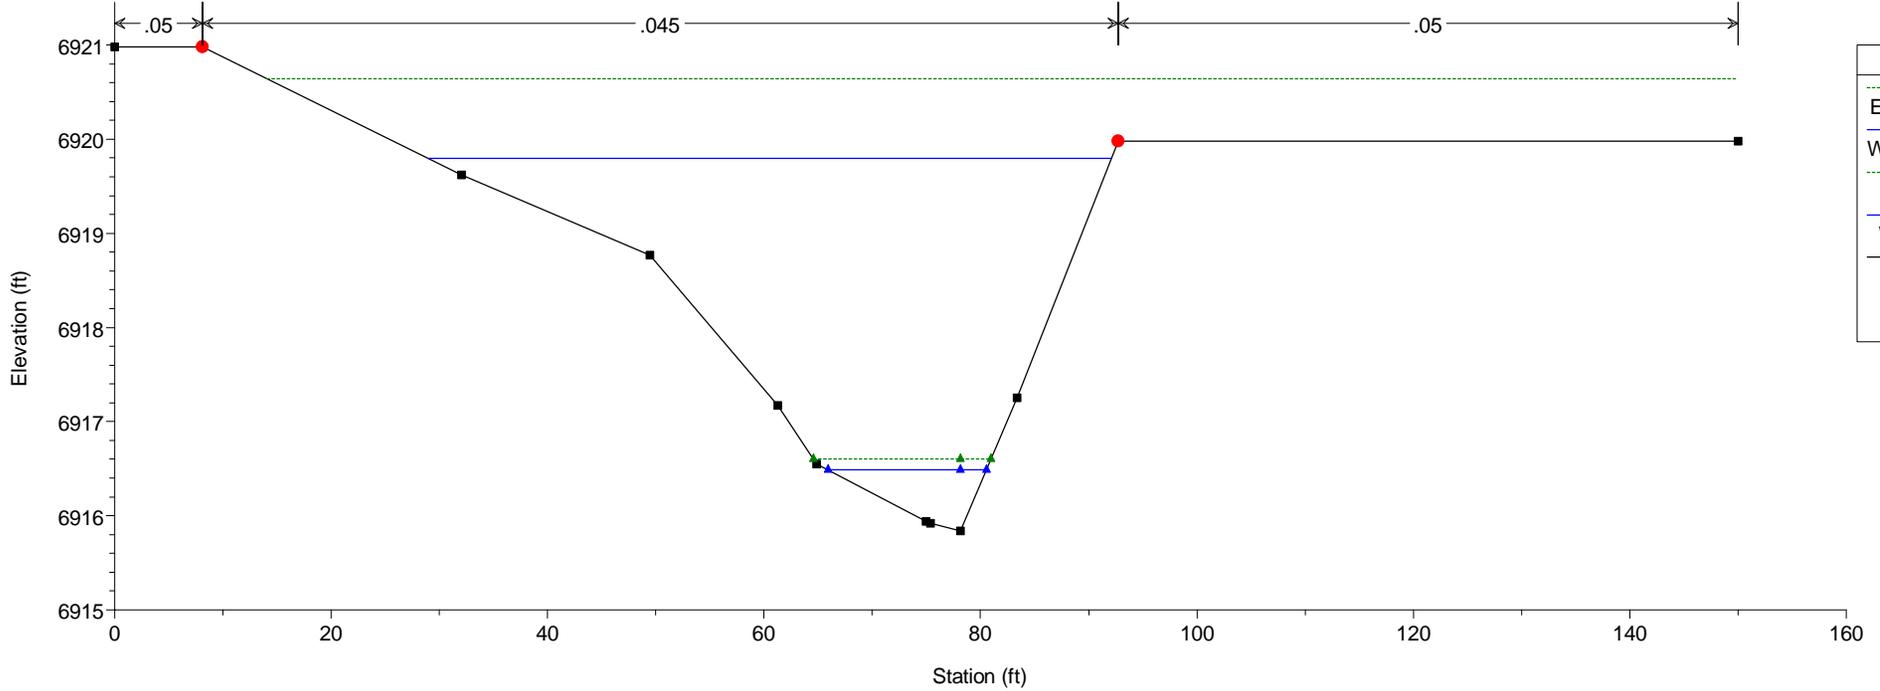



Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019
RS = 2700

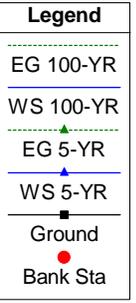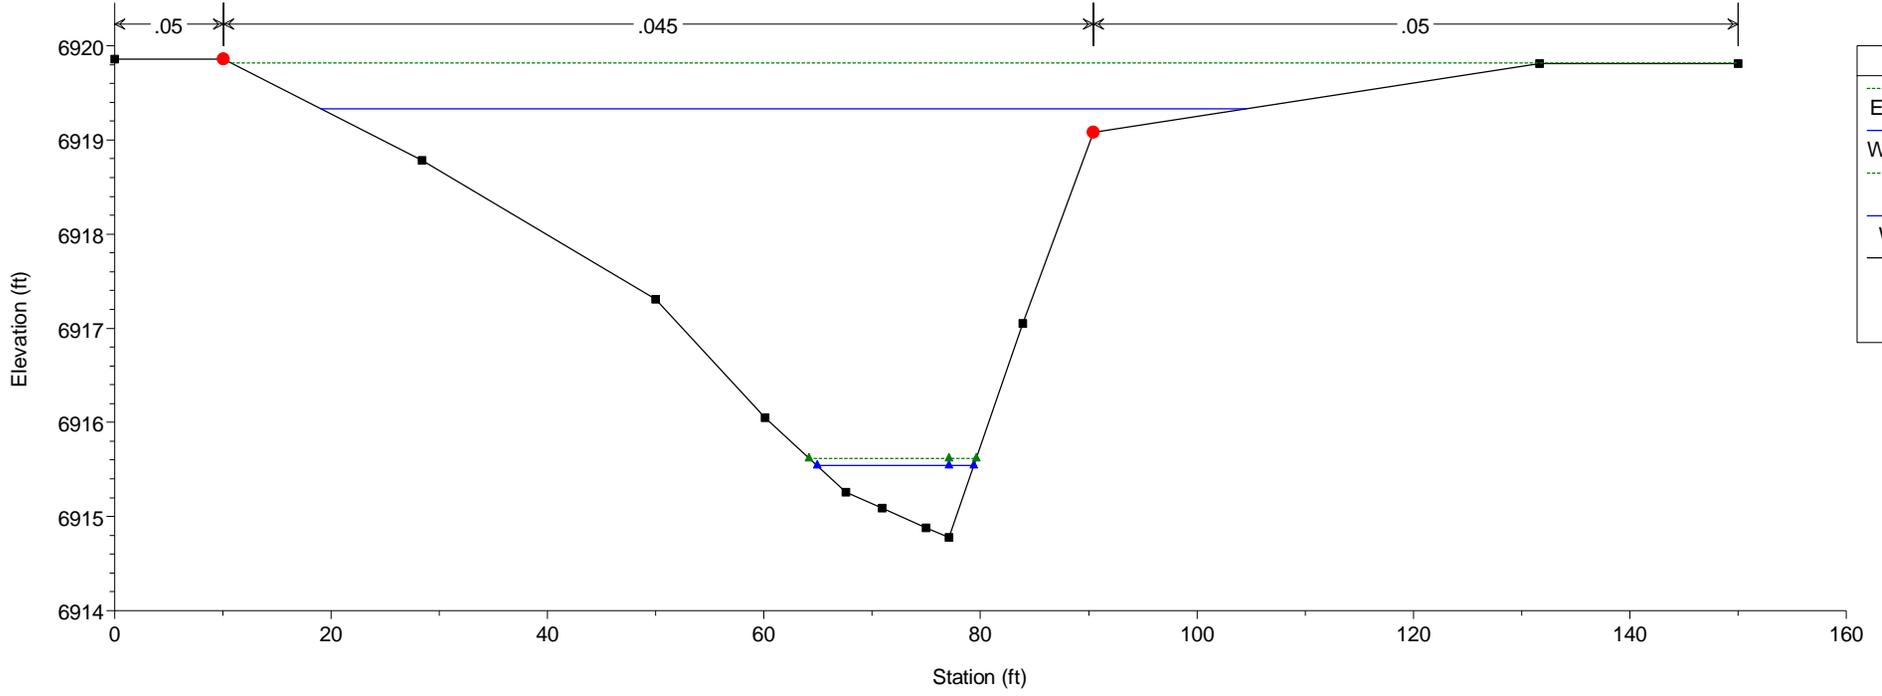


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2650

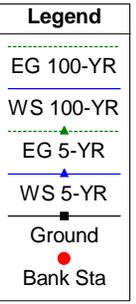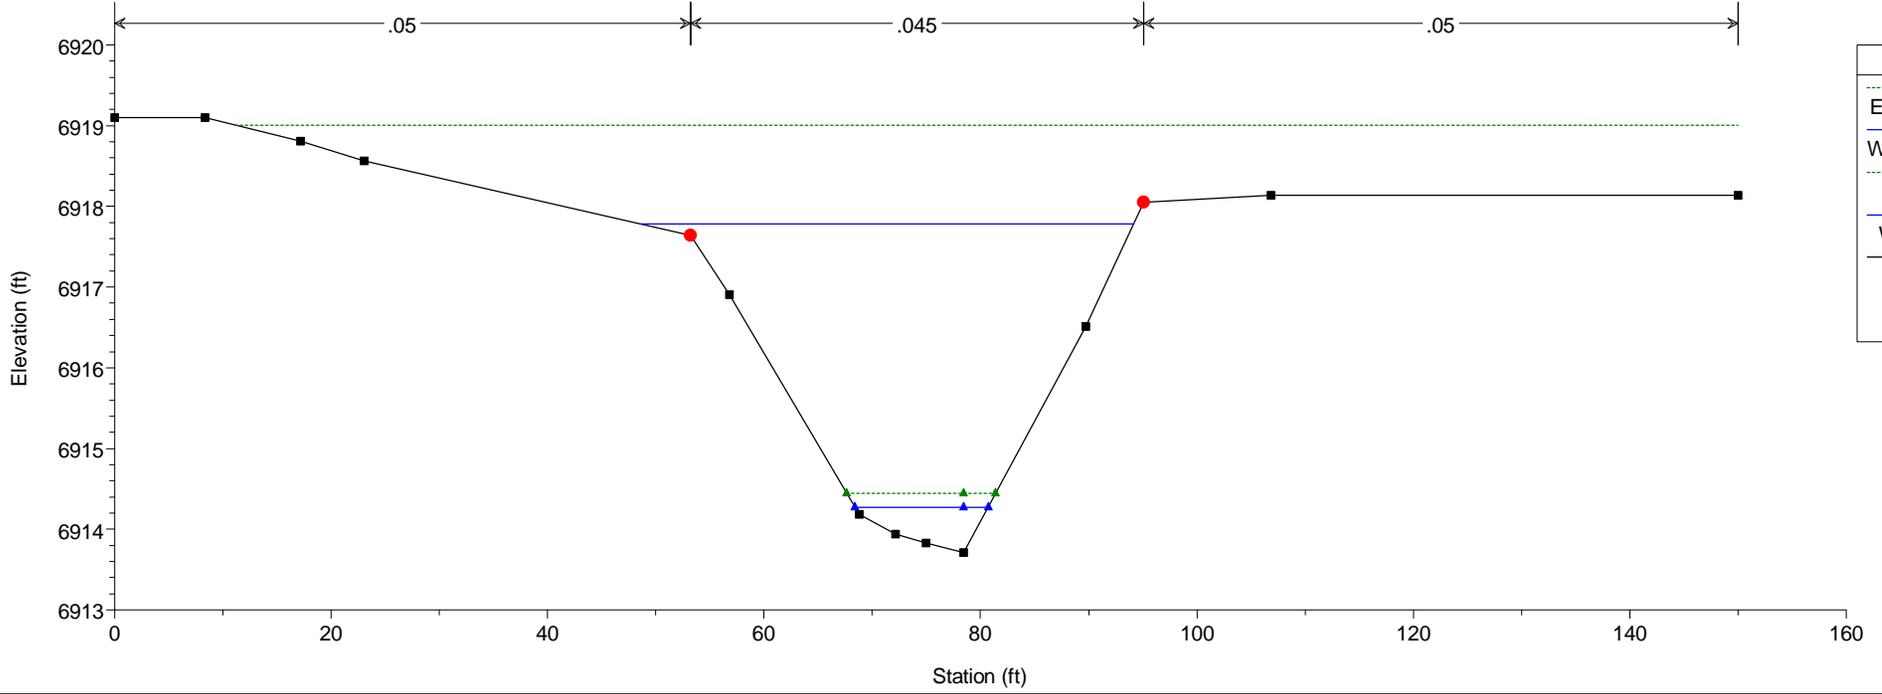

HEC-RAS Model Plan: Existing 5/21/2019

RS = 2600

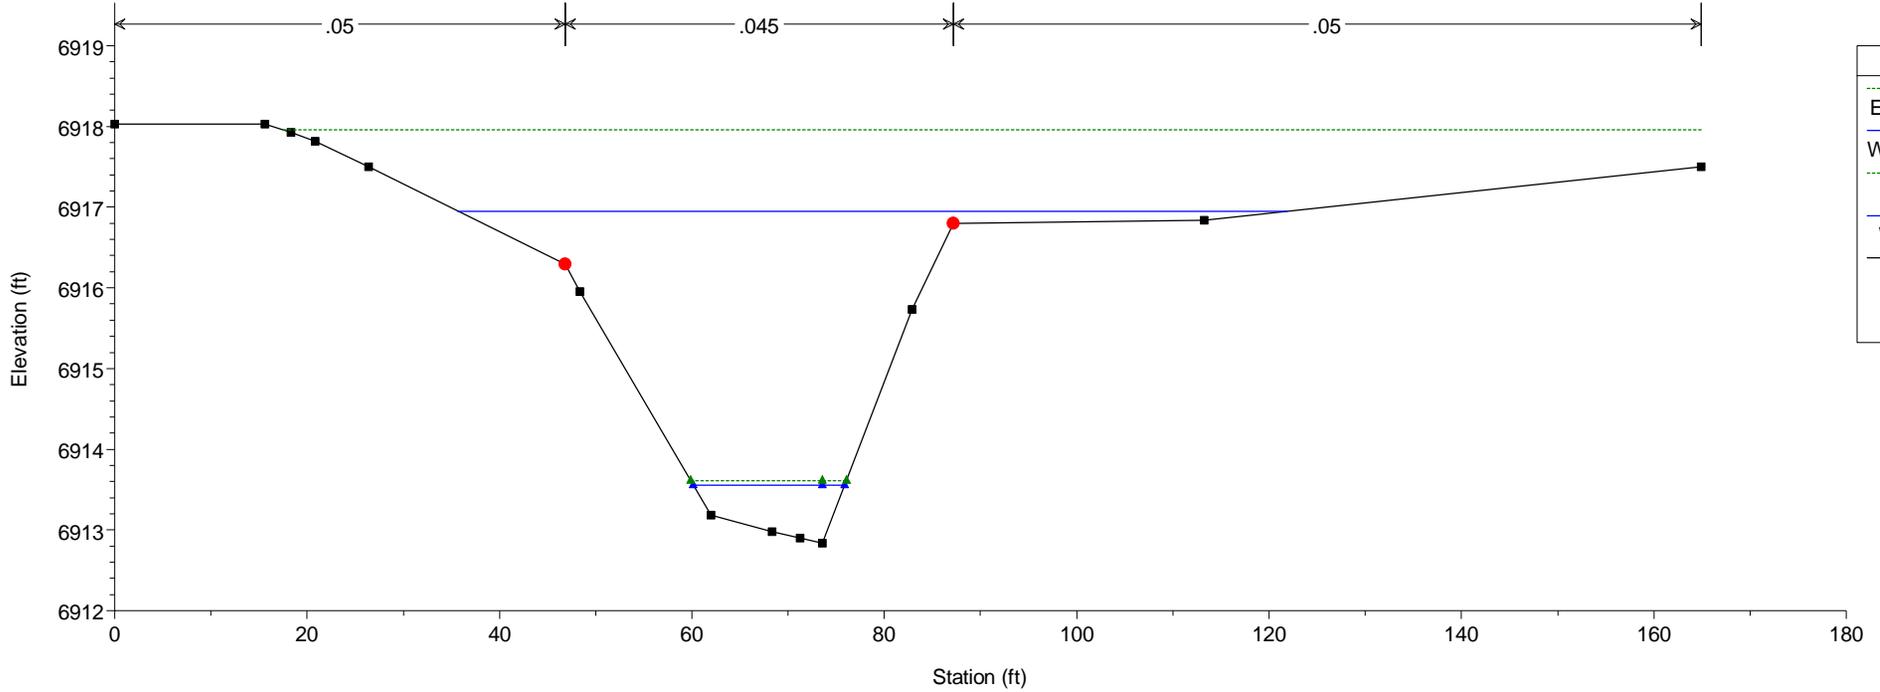


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019


RS = 2550

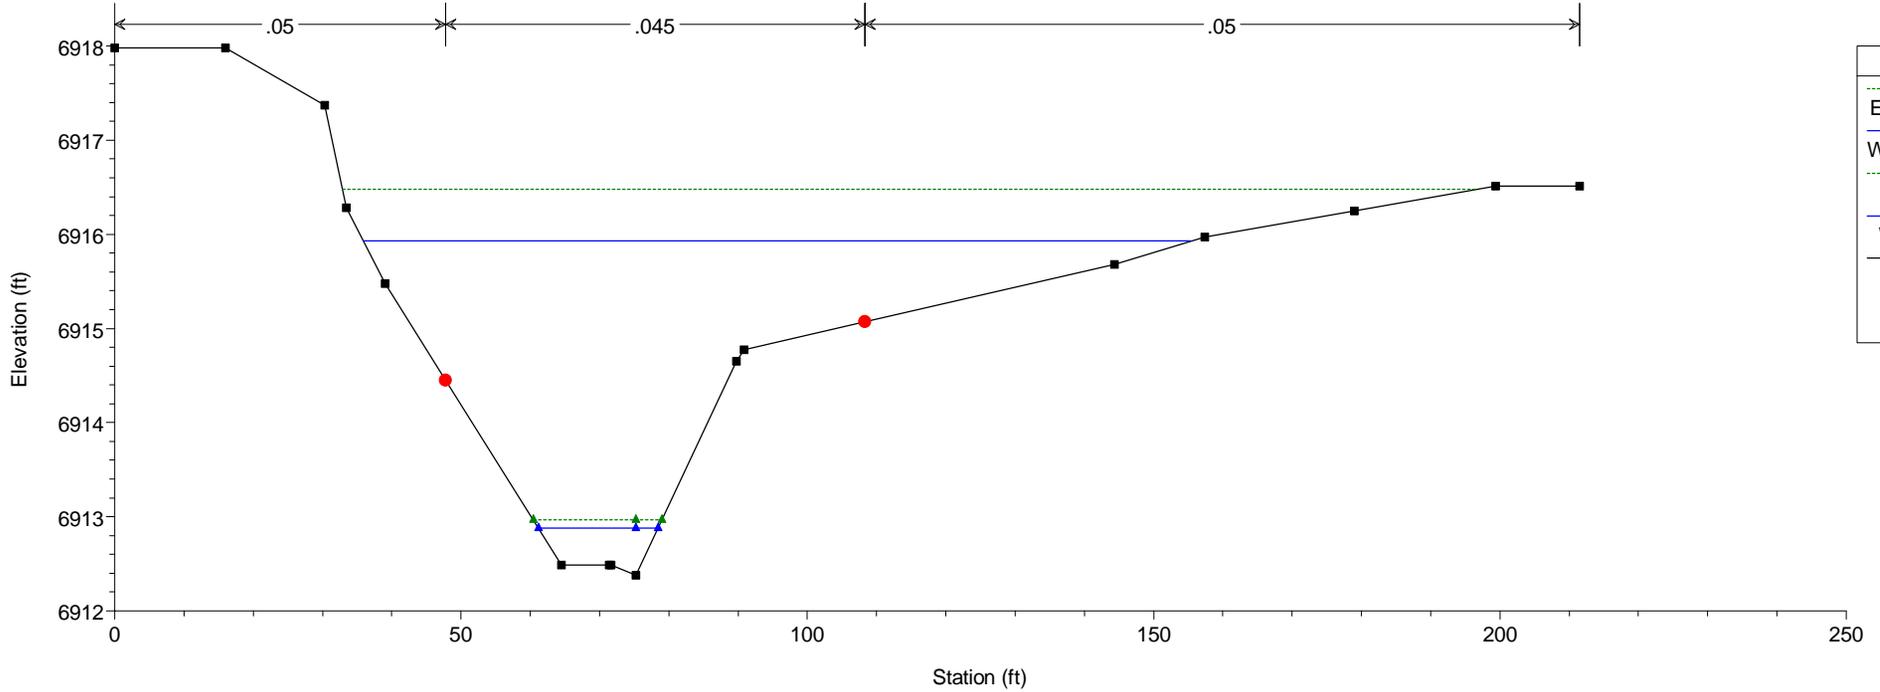

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2500

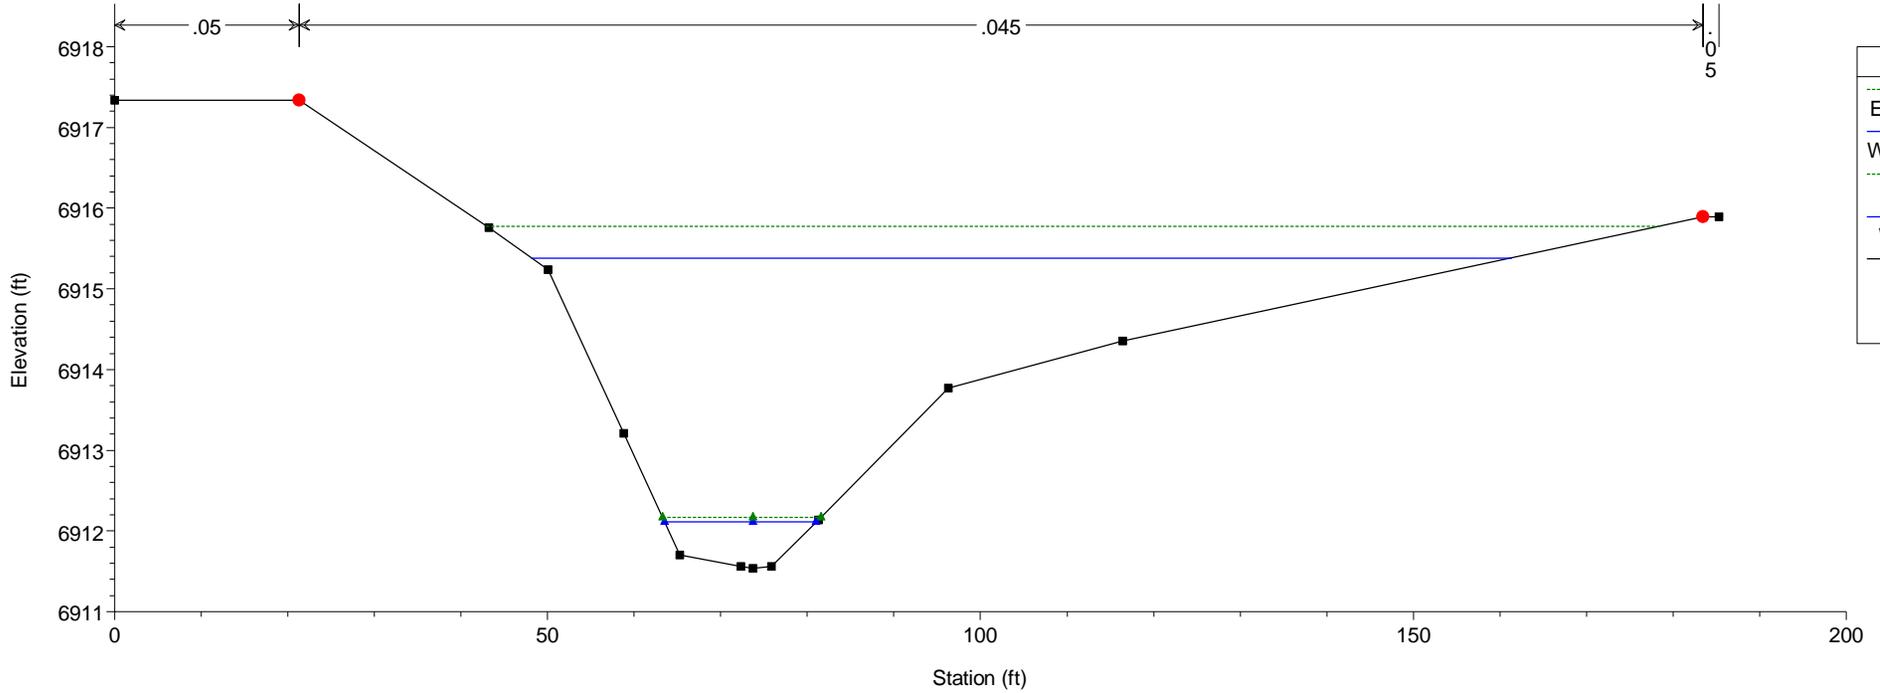

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2450

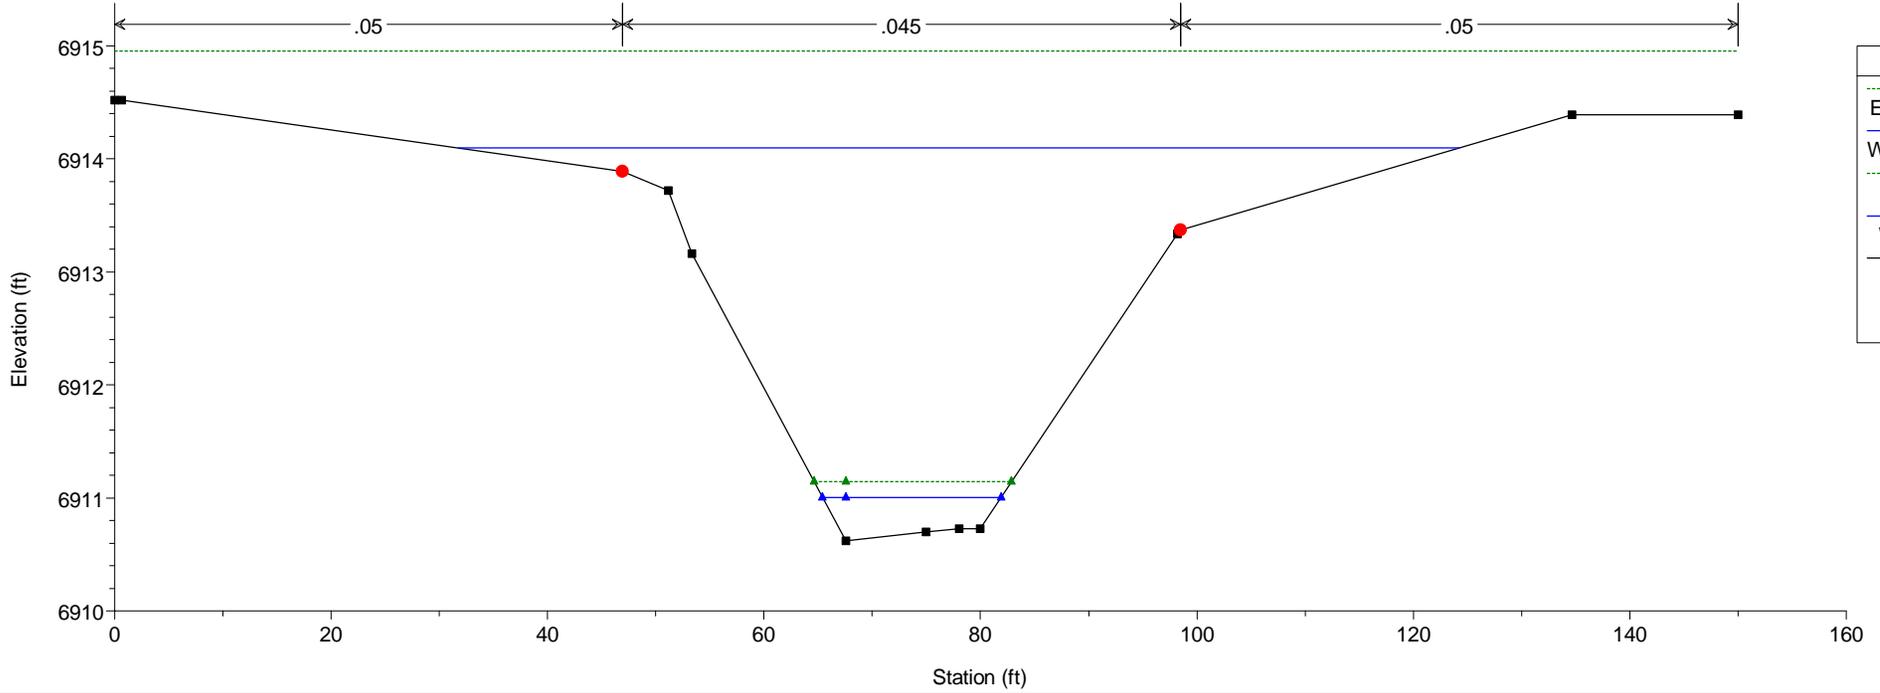

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2400

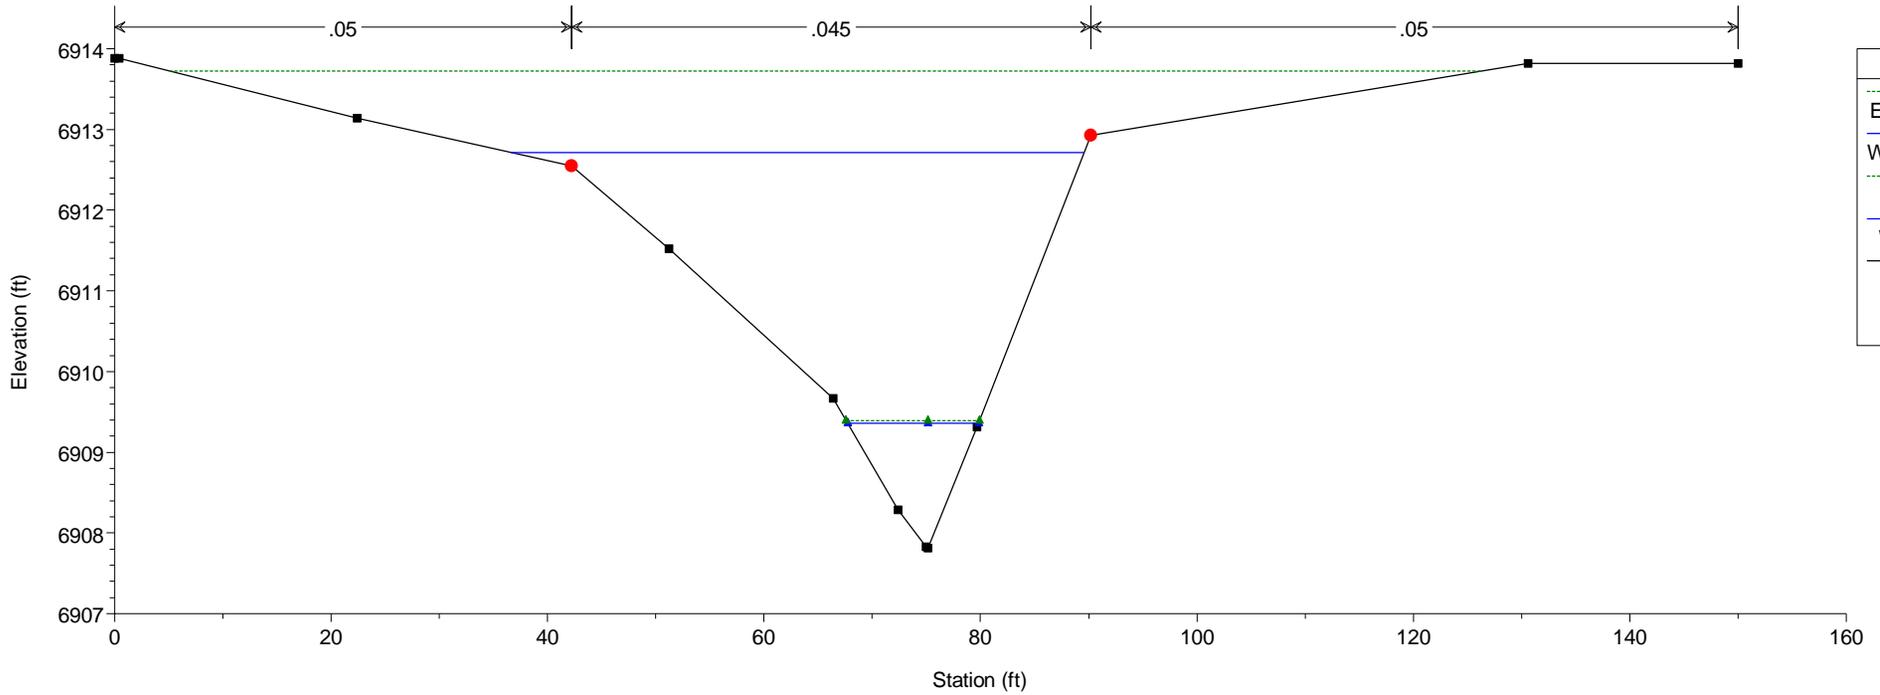

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2350

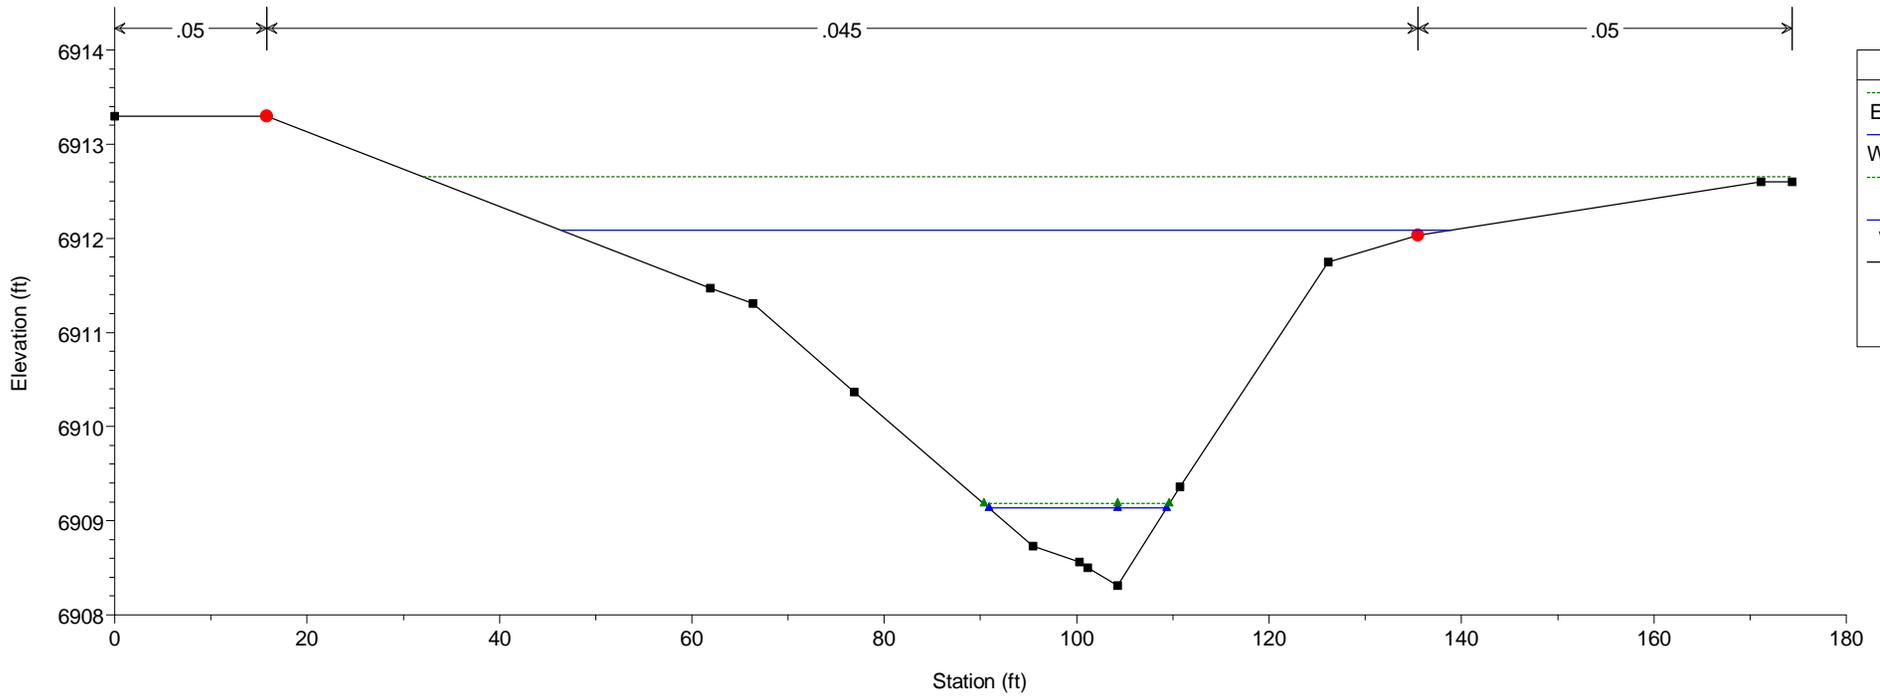

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2300

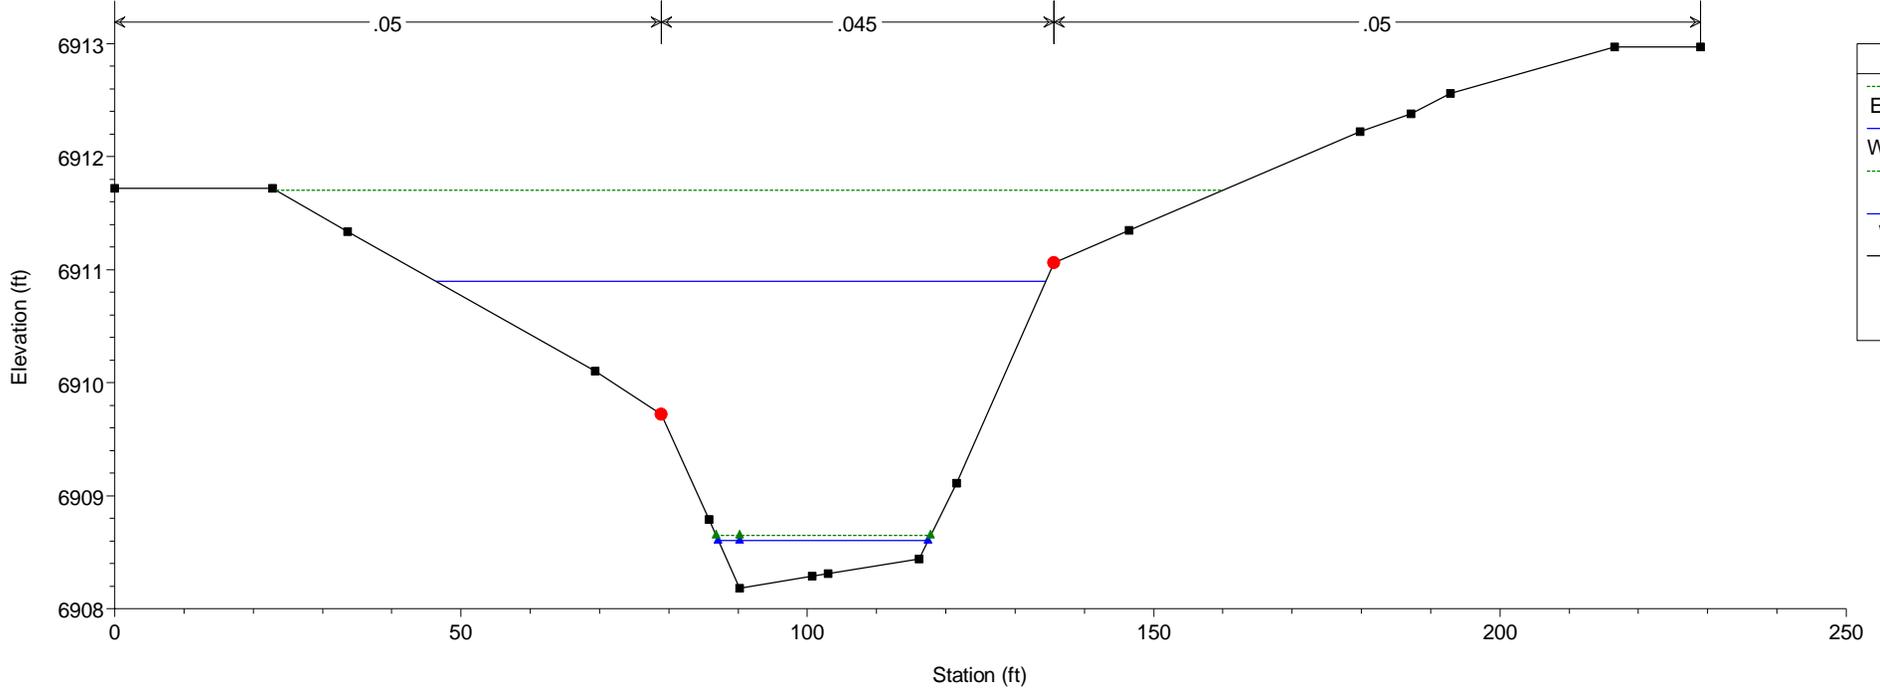

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2250

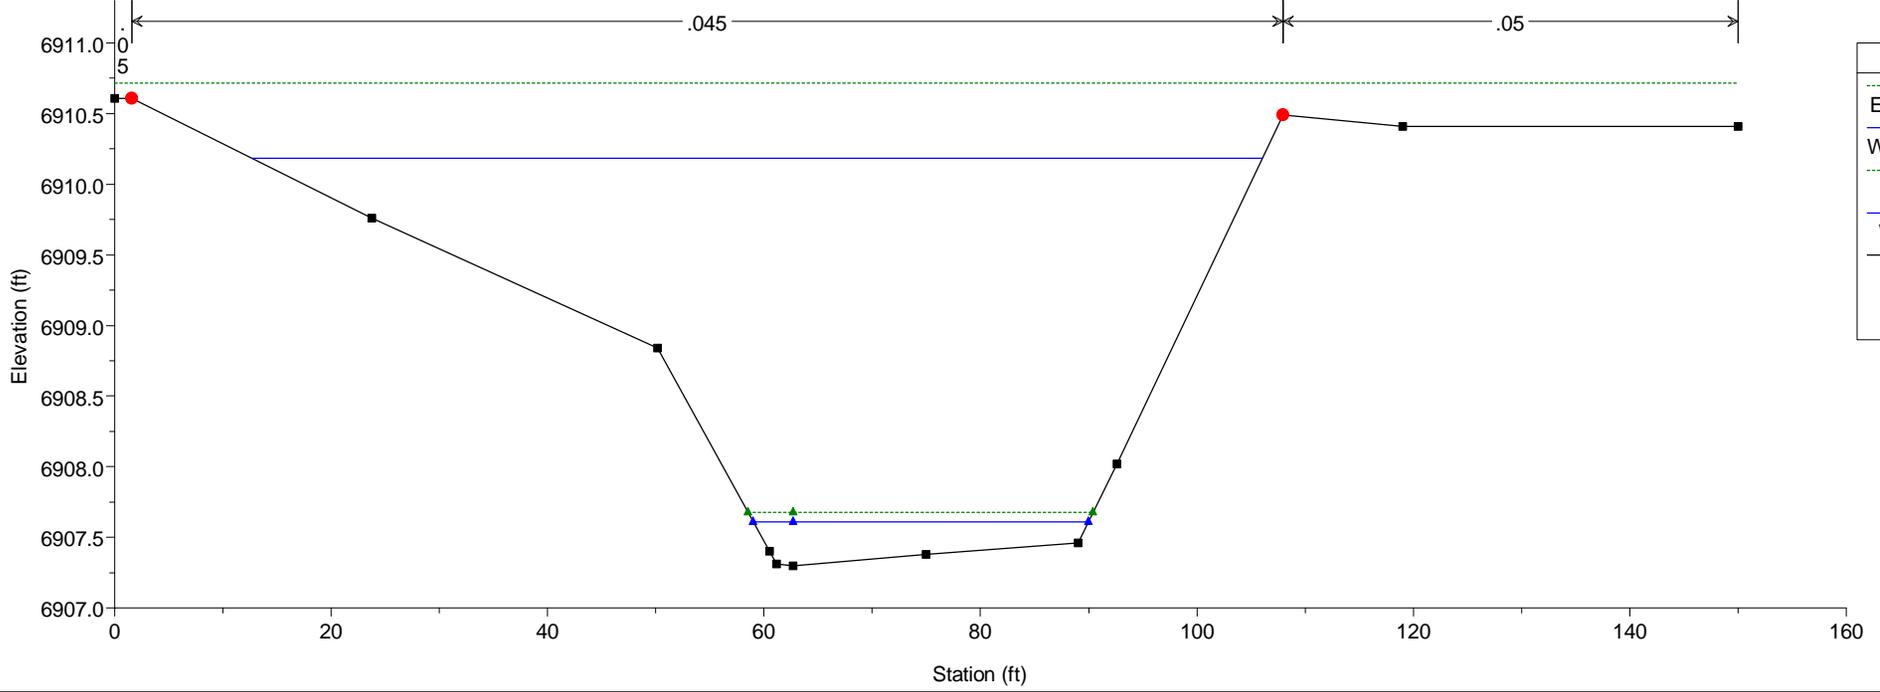

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2200

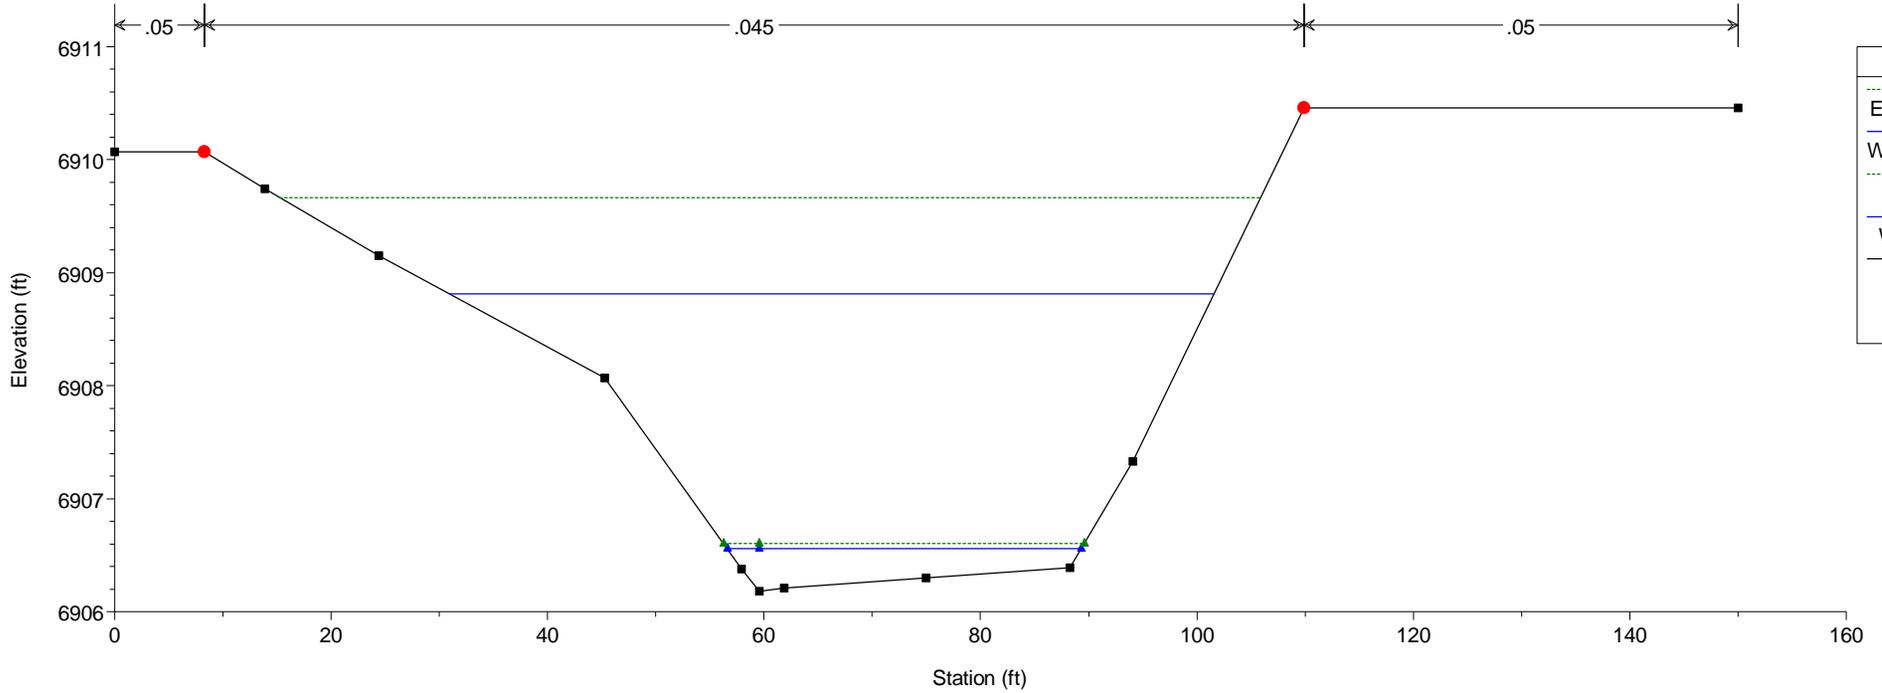

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2150

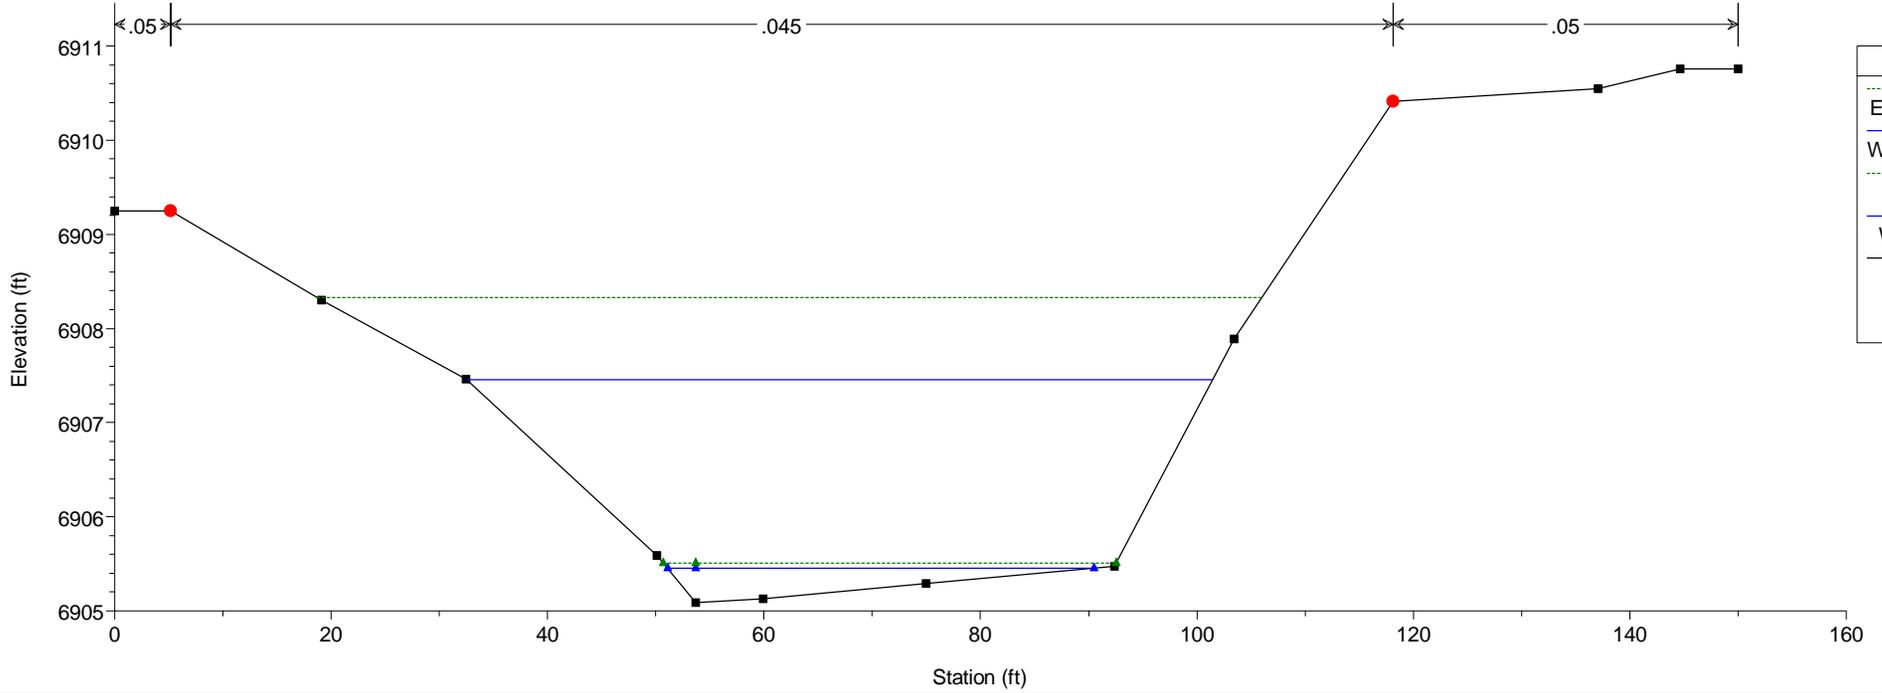


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2100

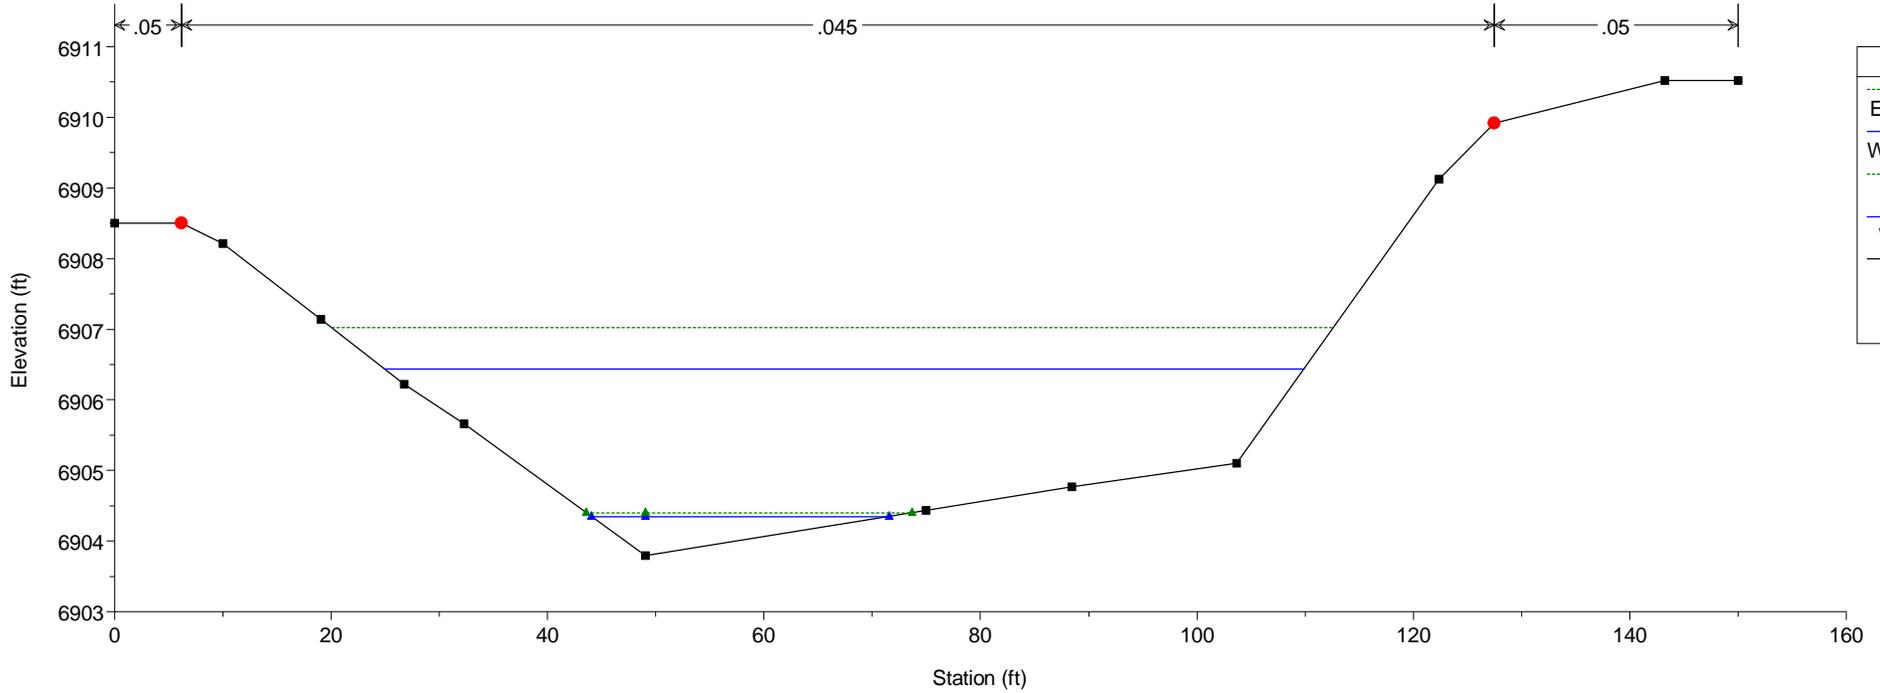

HEC-RAS Model Plan: Existing 5/21/2019
RS = 2050

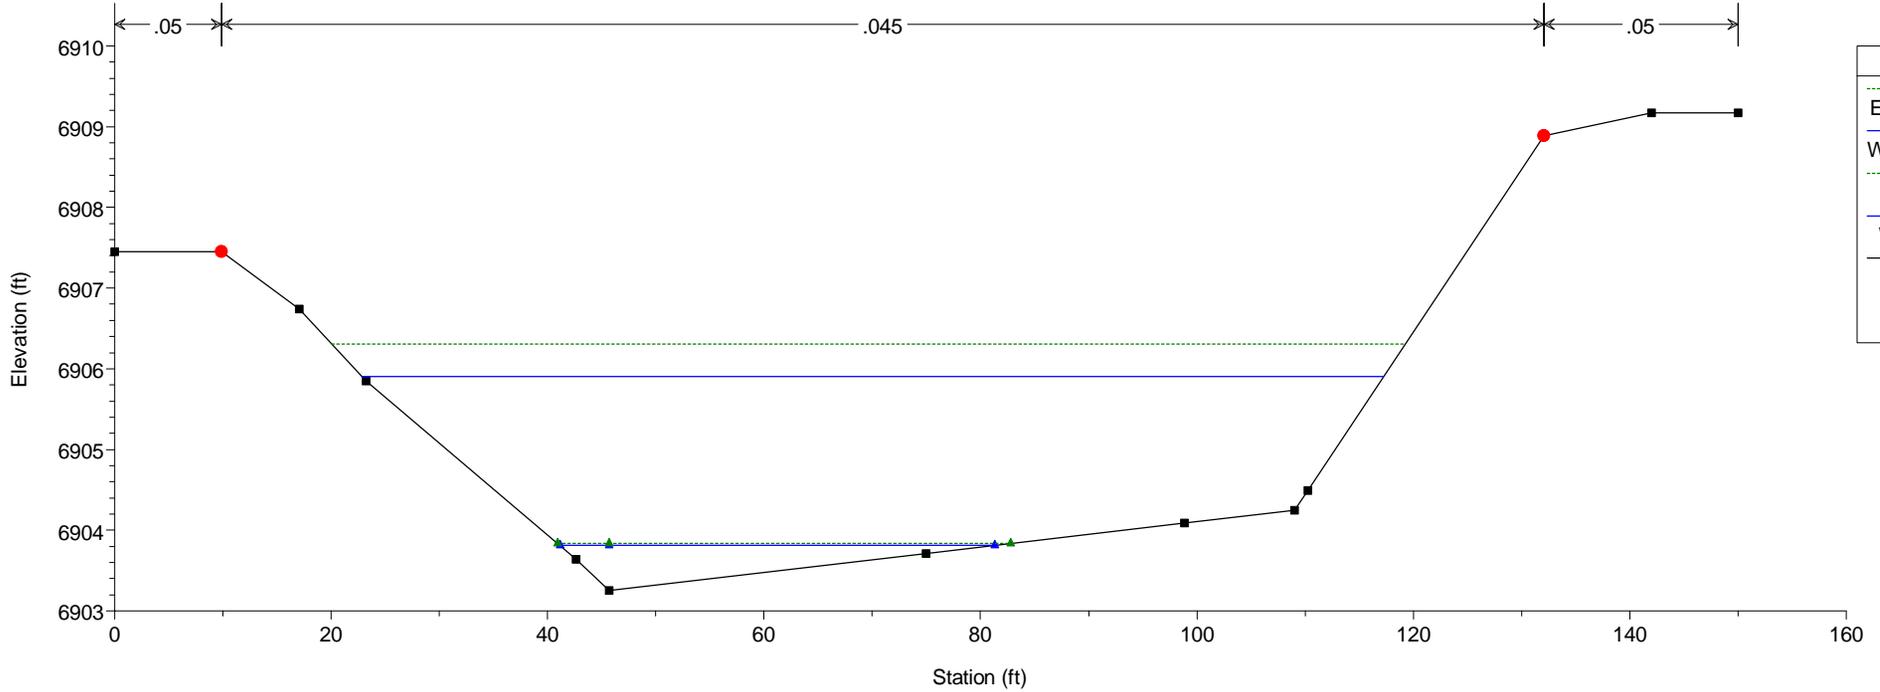


HEC-RAS Model Plan: Existing 5/21/2019
RS = 2000

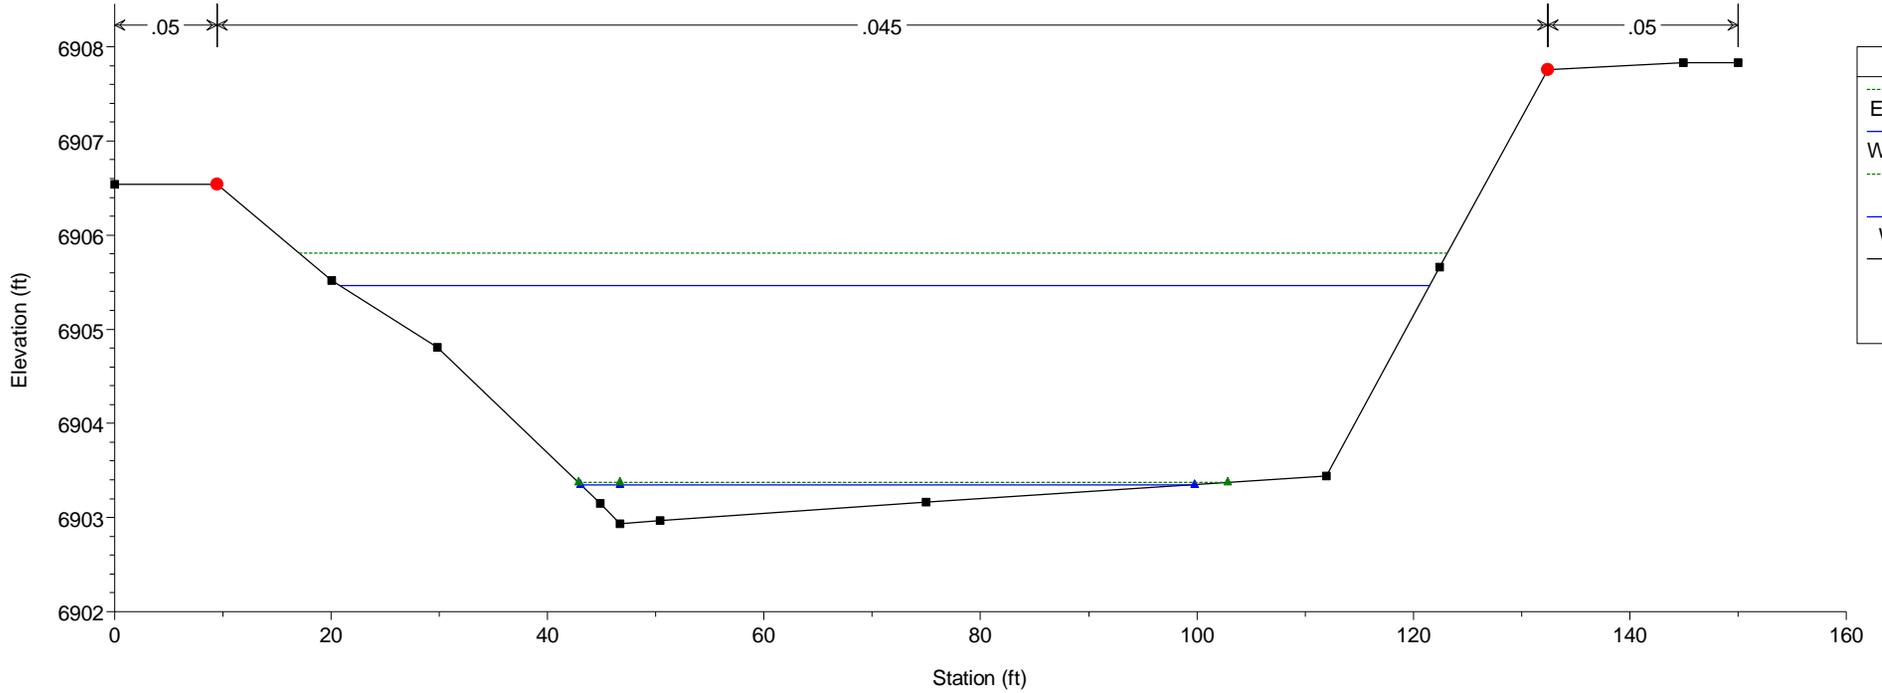

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019
RS = 1950

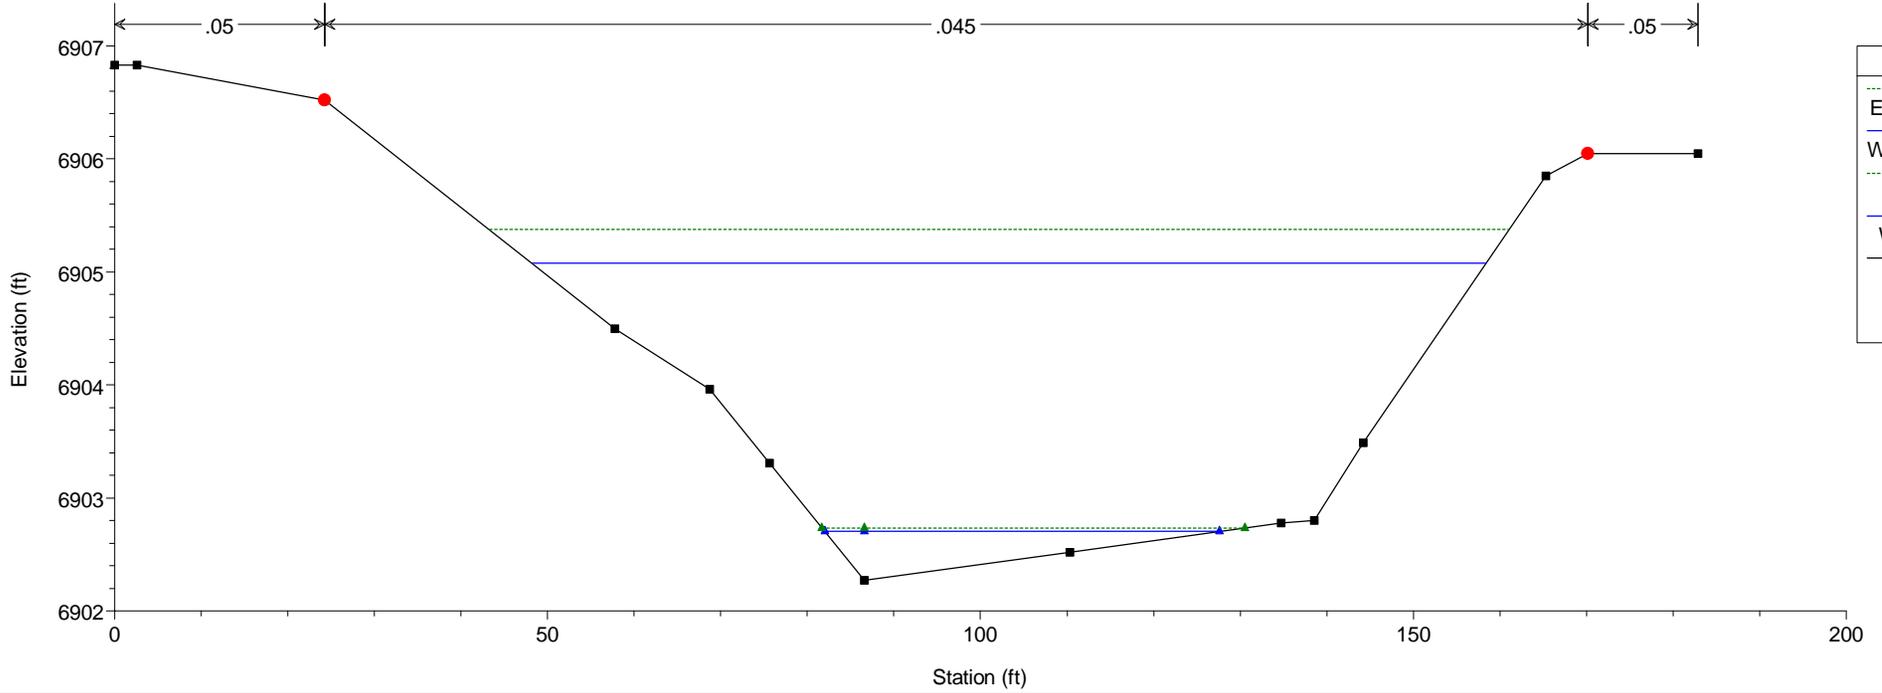


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019

RS = 1900

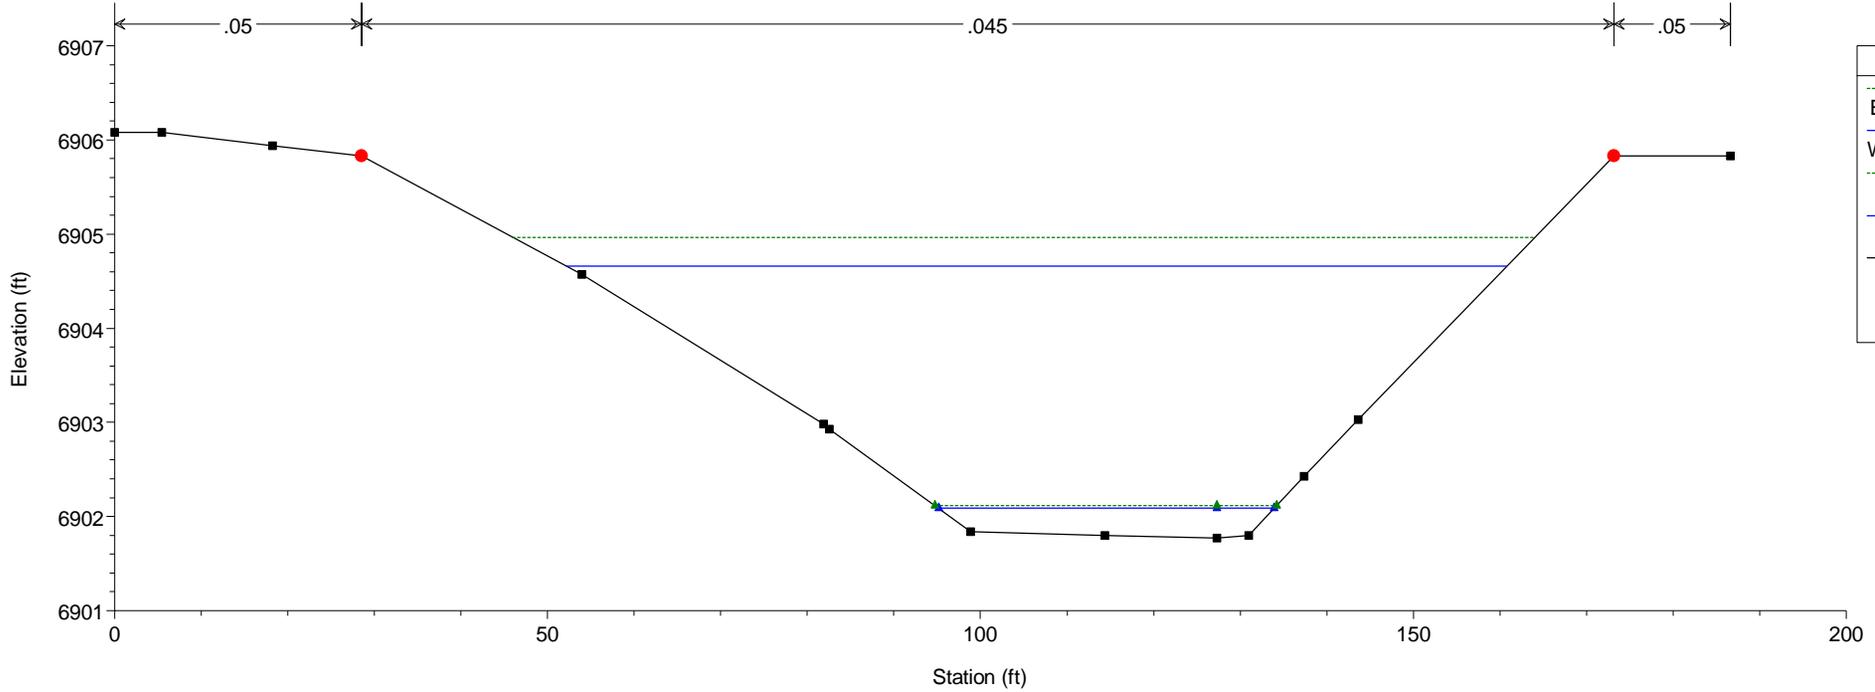


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019



RS = 1850

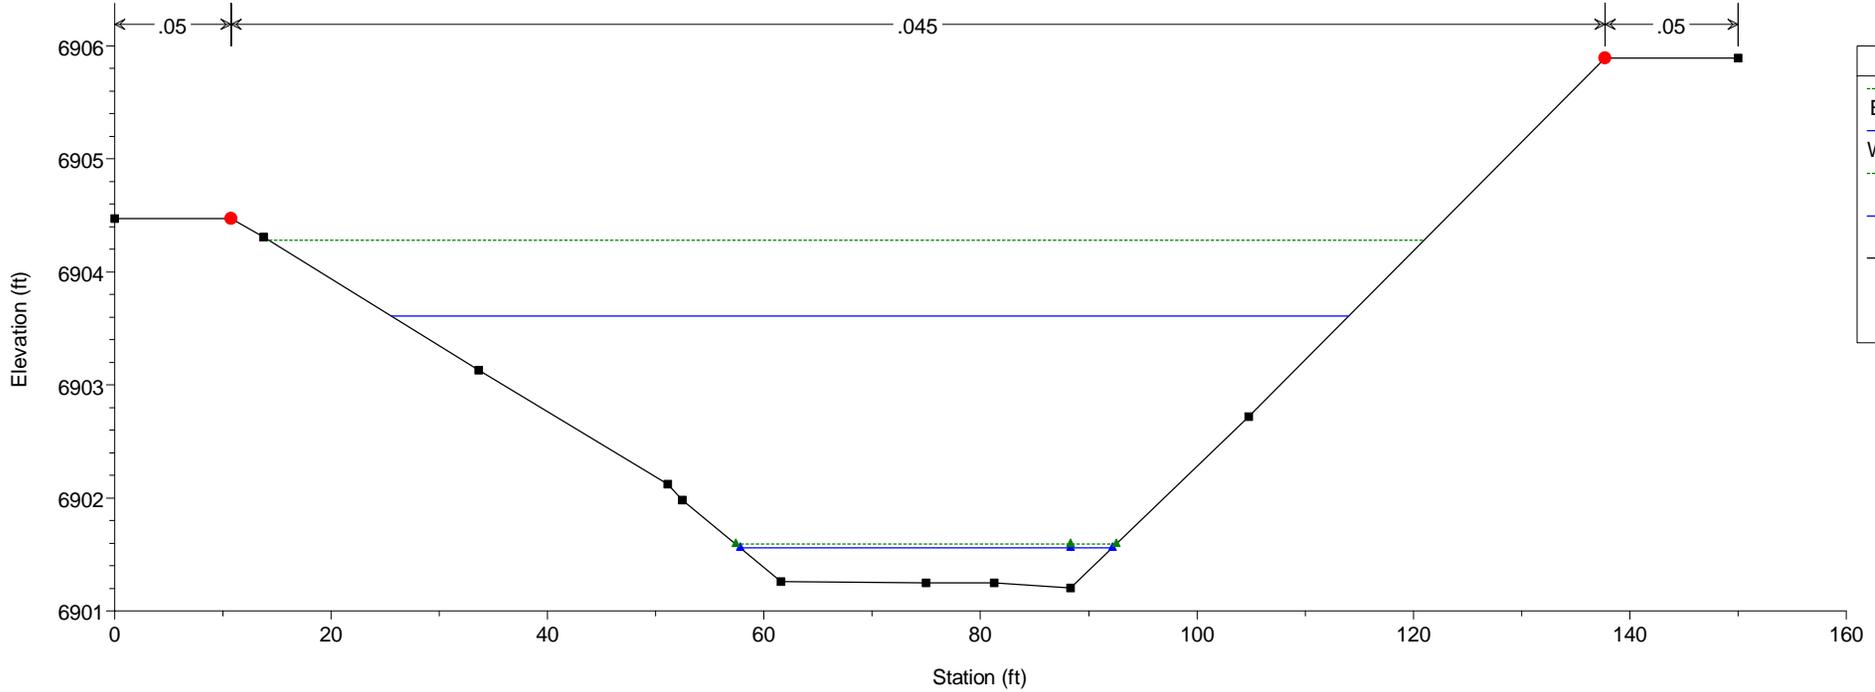



Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1800

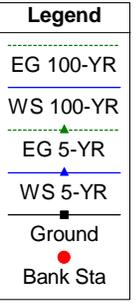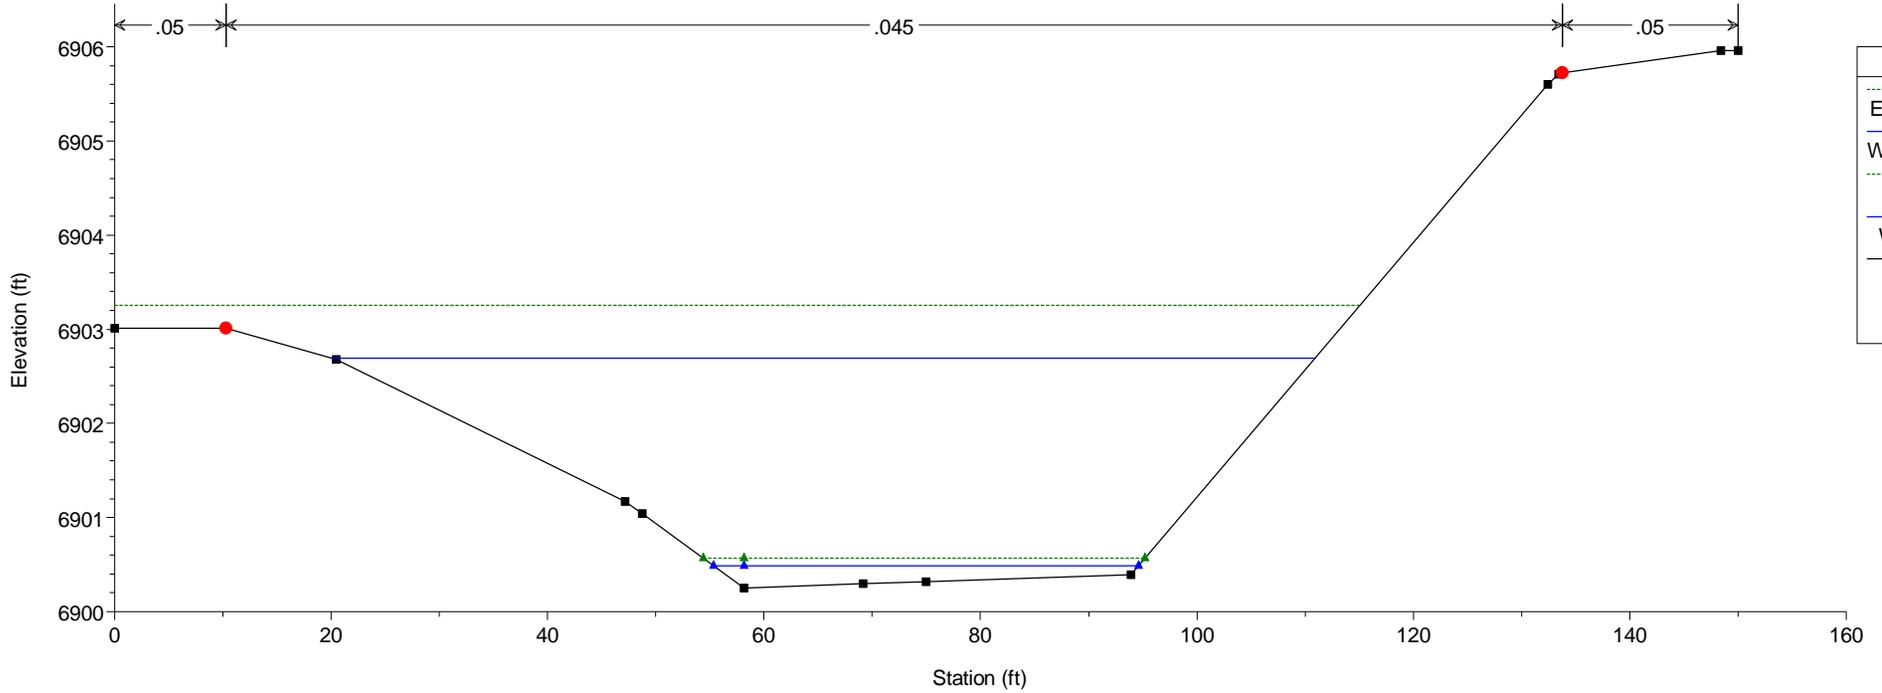


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1750

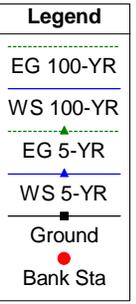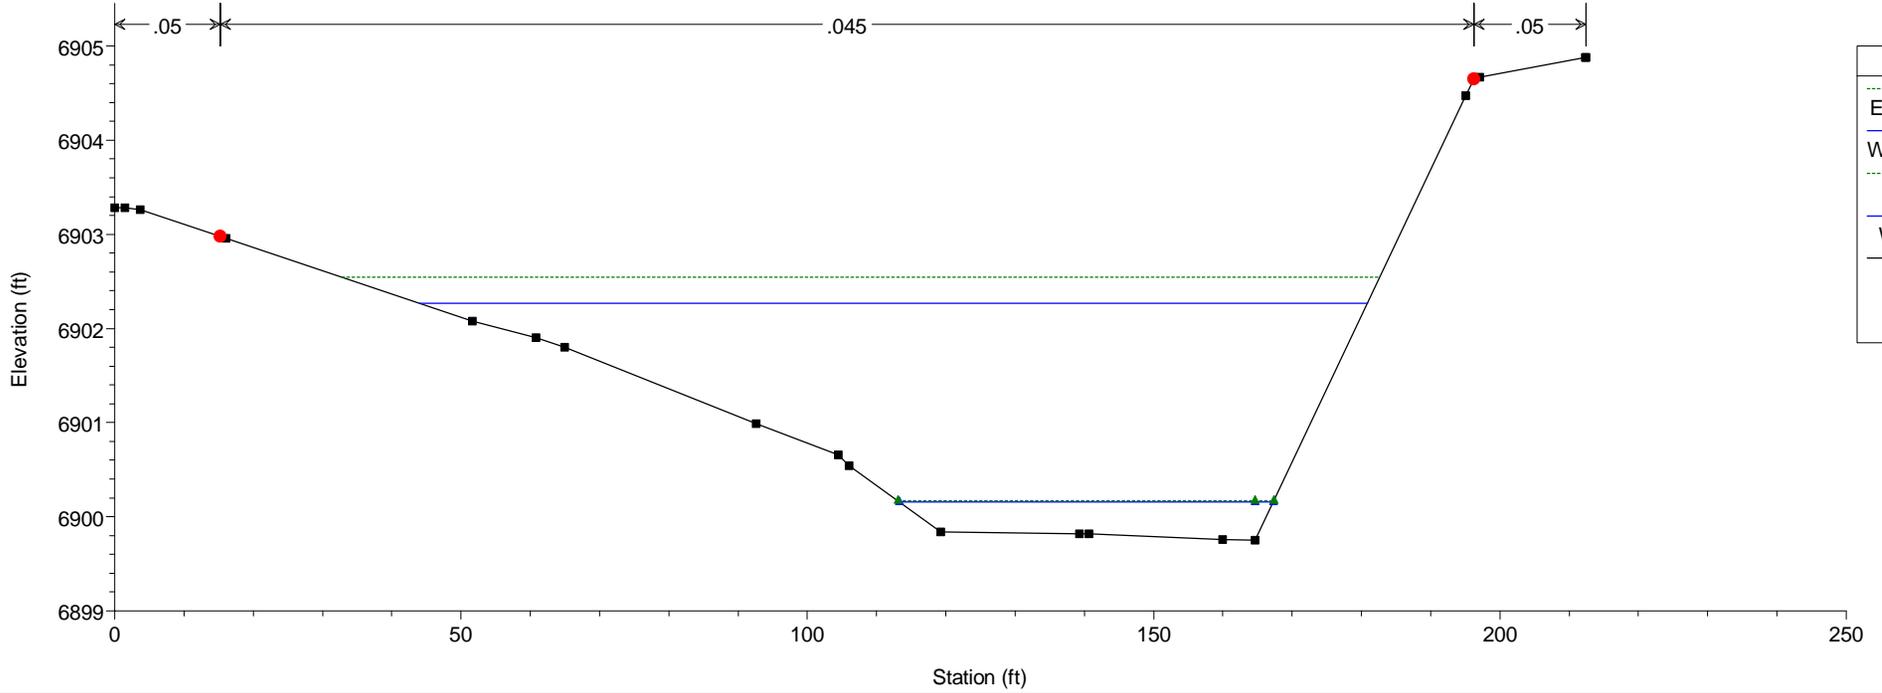


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1700

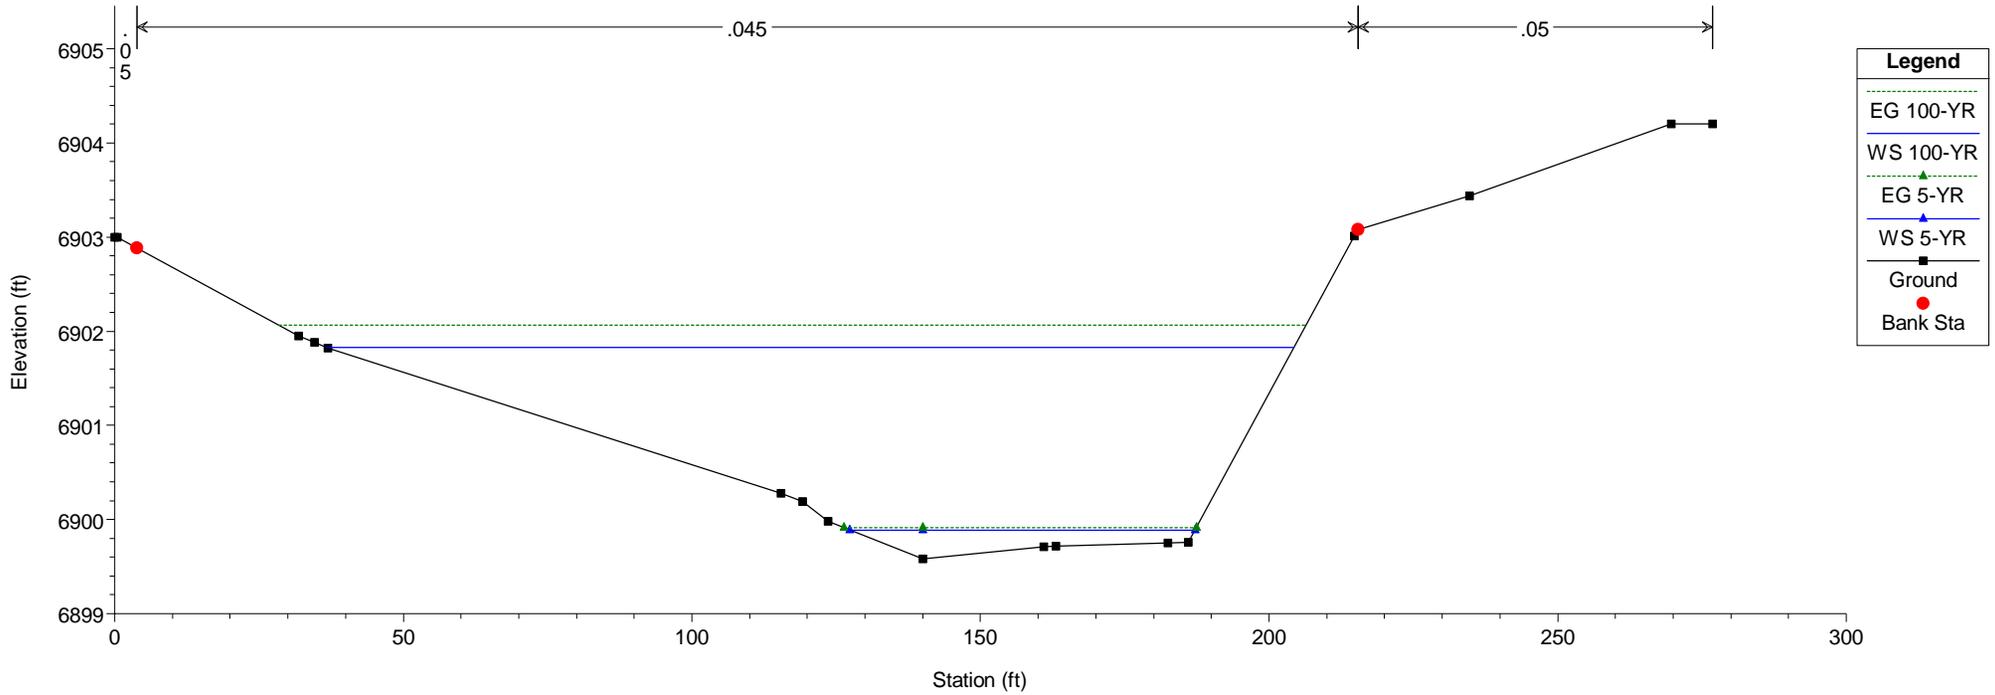


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1650

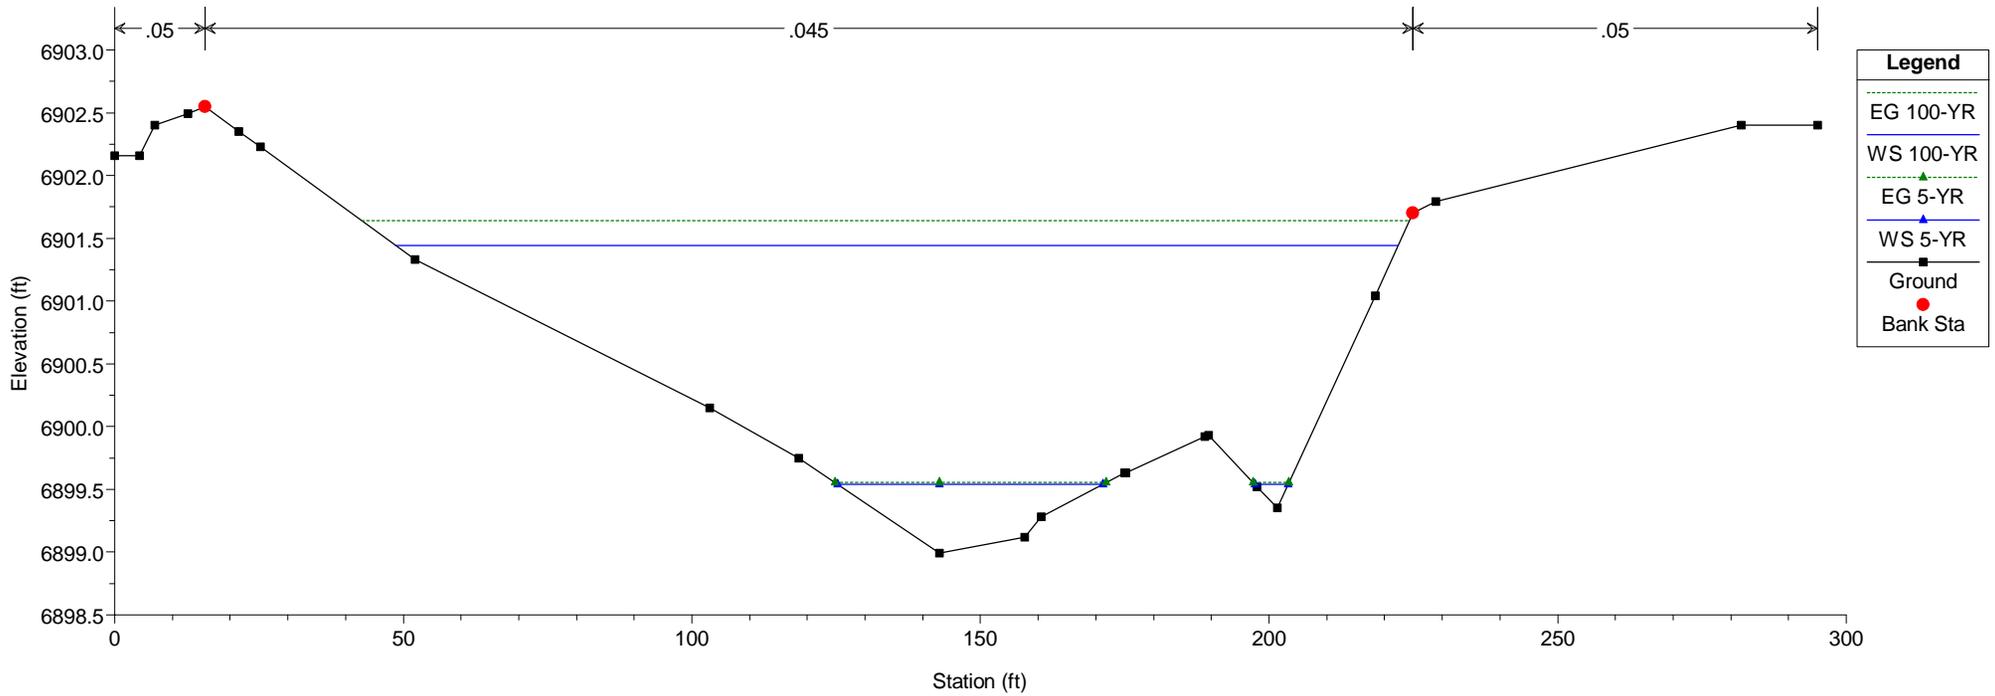


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1600

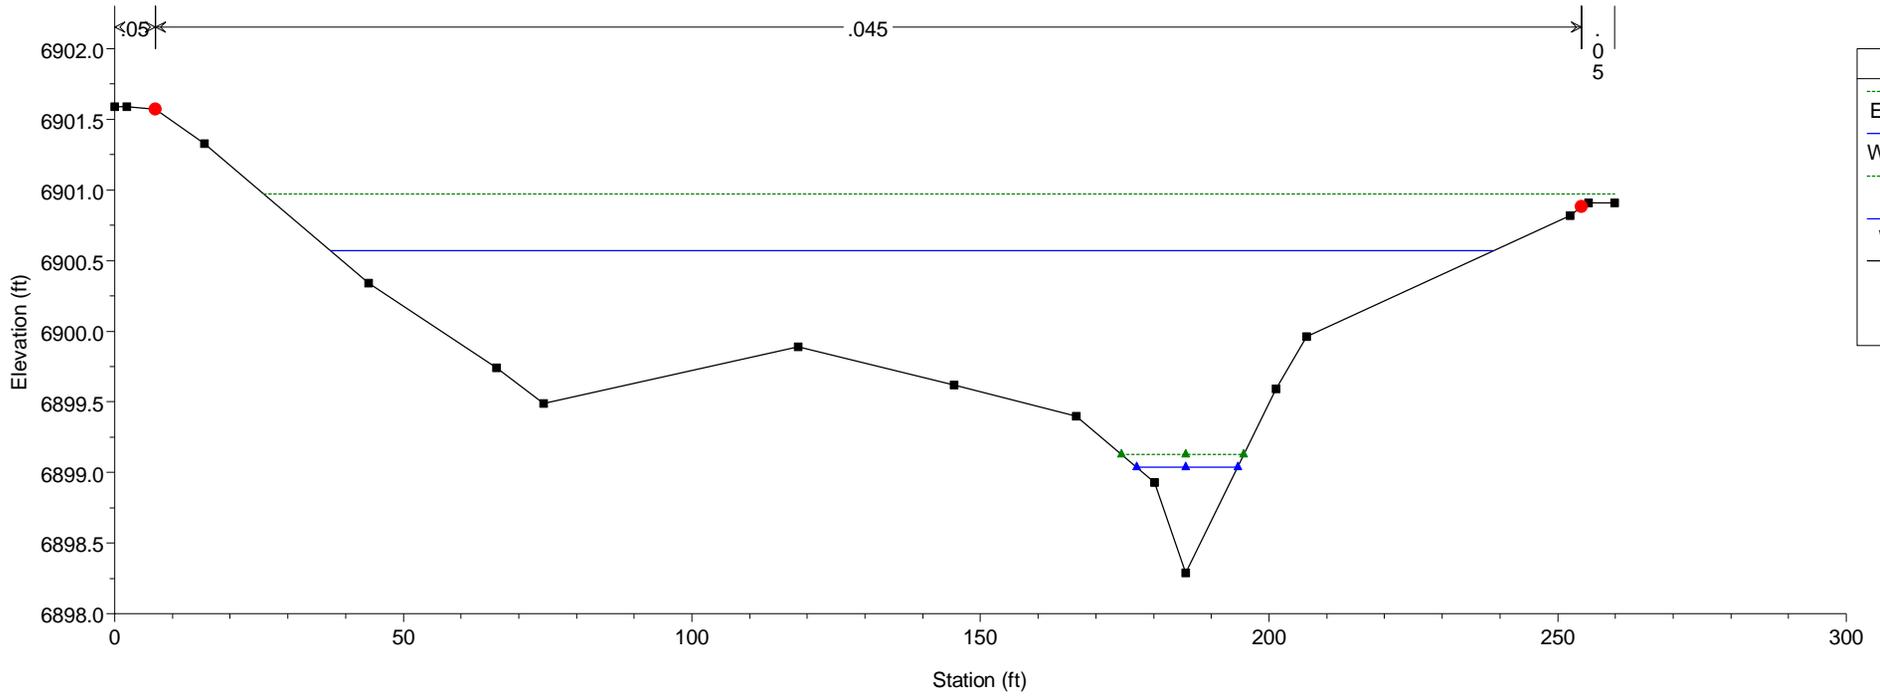

HEC-RAS Model Plan: Existing 5/21/2019
RS = 1550

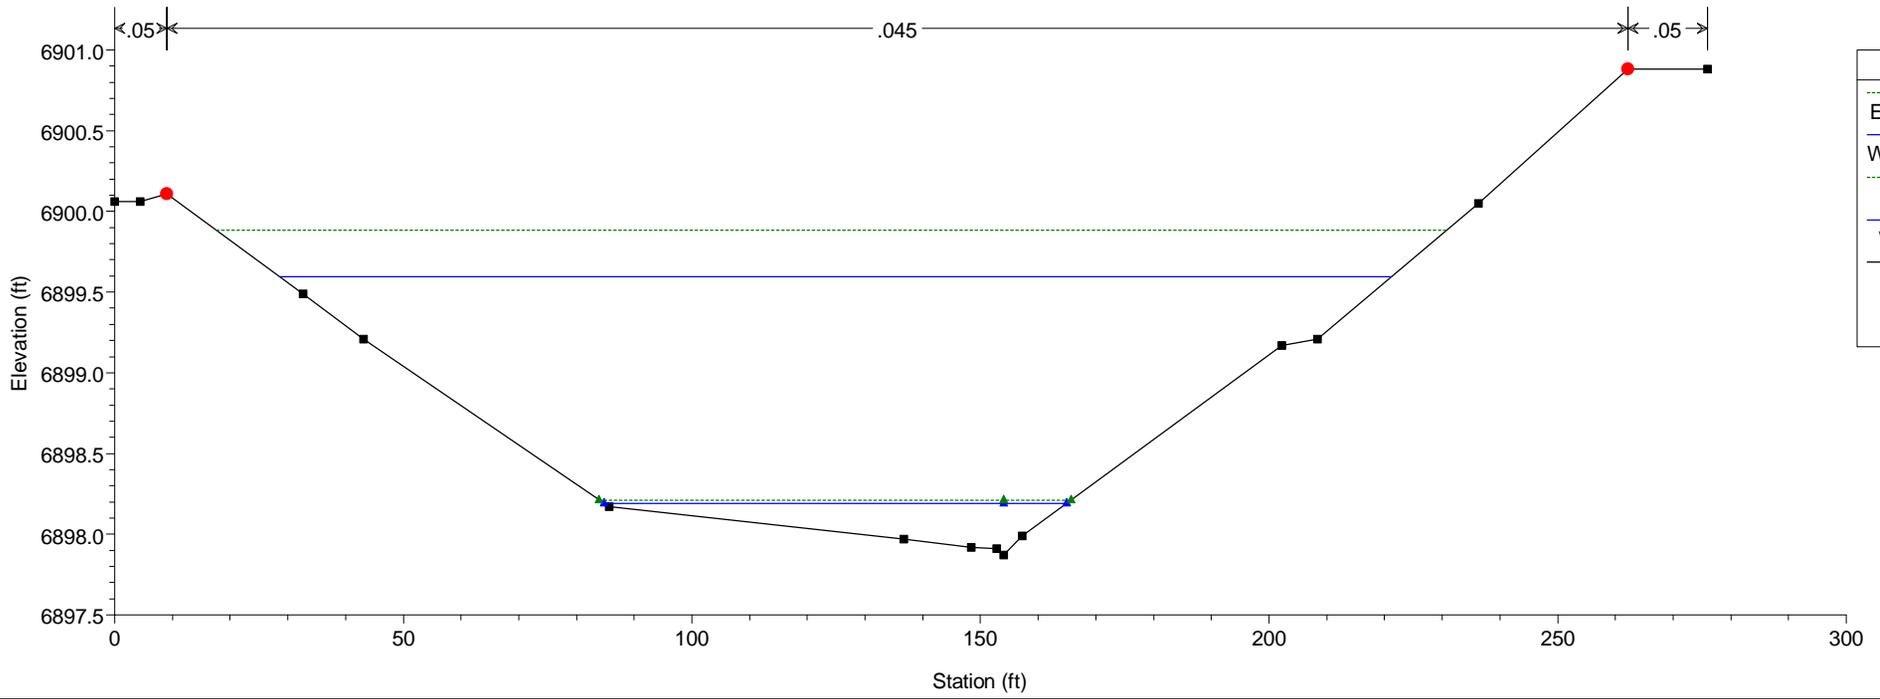


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1500

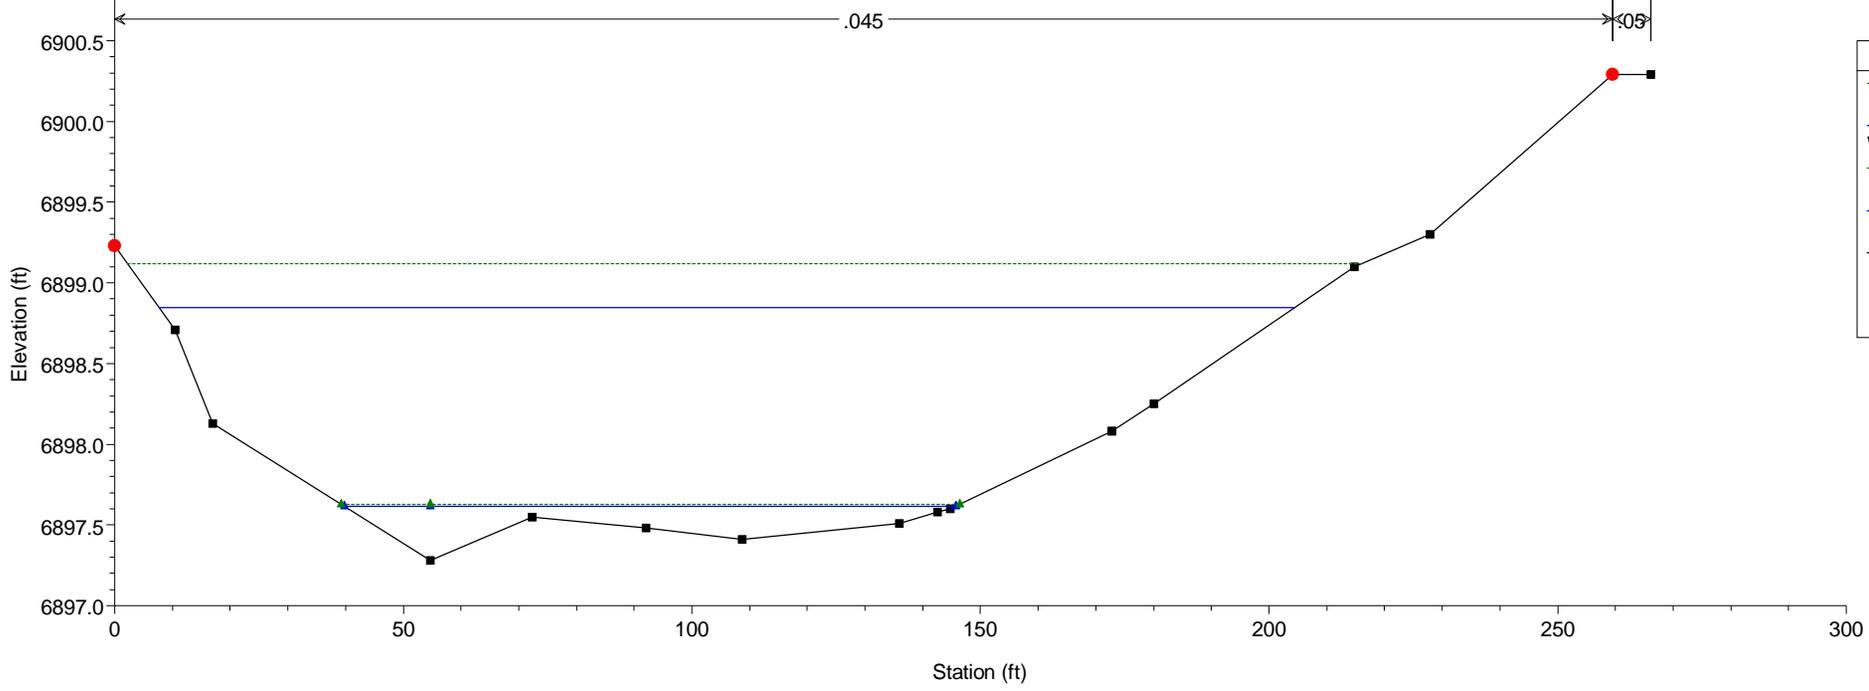

Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1450

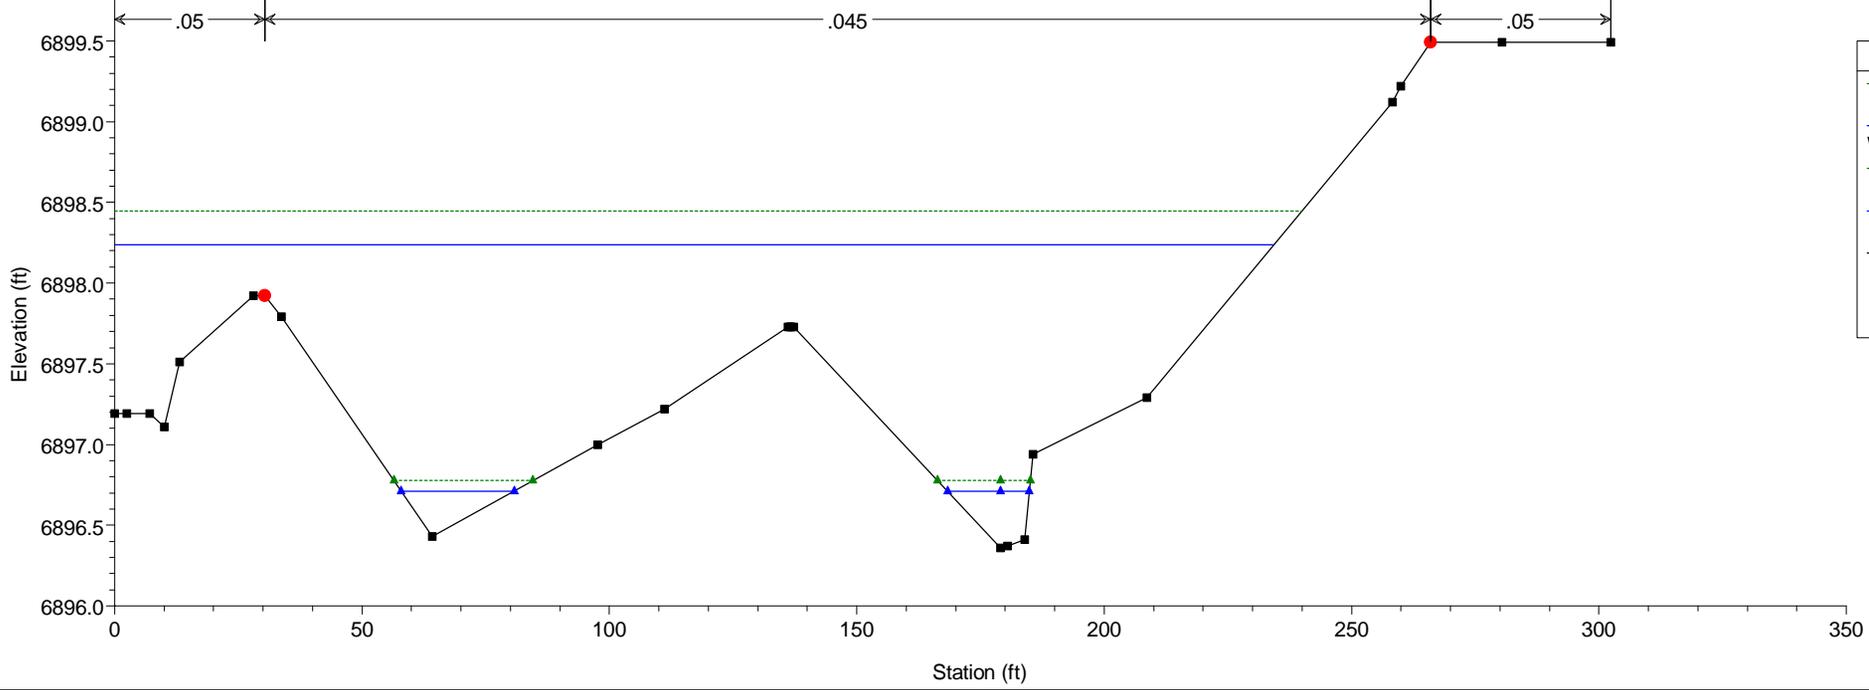


Legend

- EG 100-YR
- WS 100-YR
- EG 5-YR
- WS 5-YR
- Ground
- Bank Sta

HEC-RAS Model Plan: Existing 5/21/2019
RS = 1400


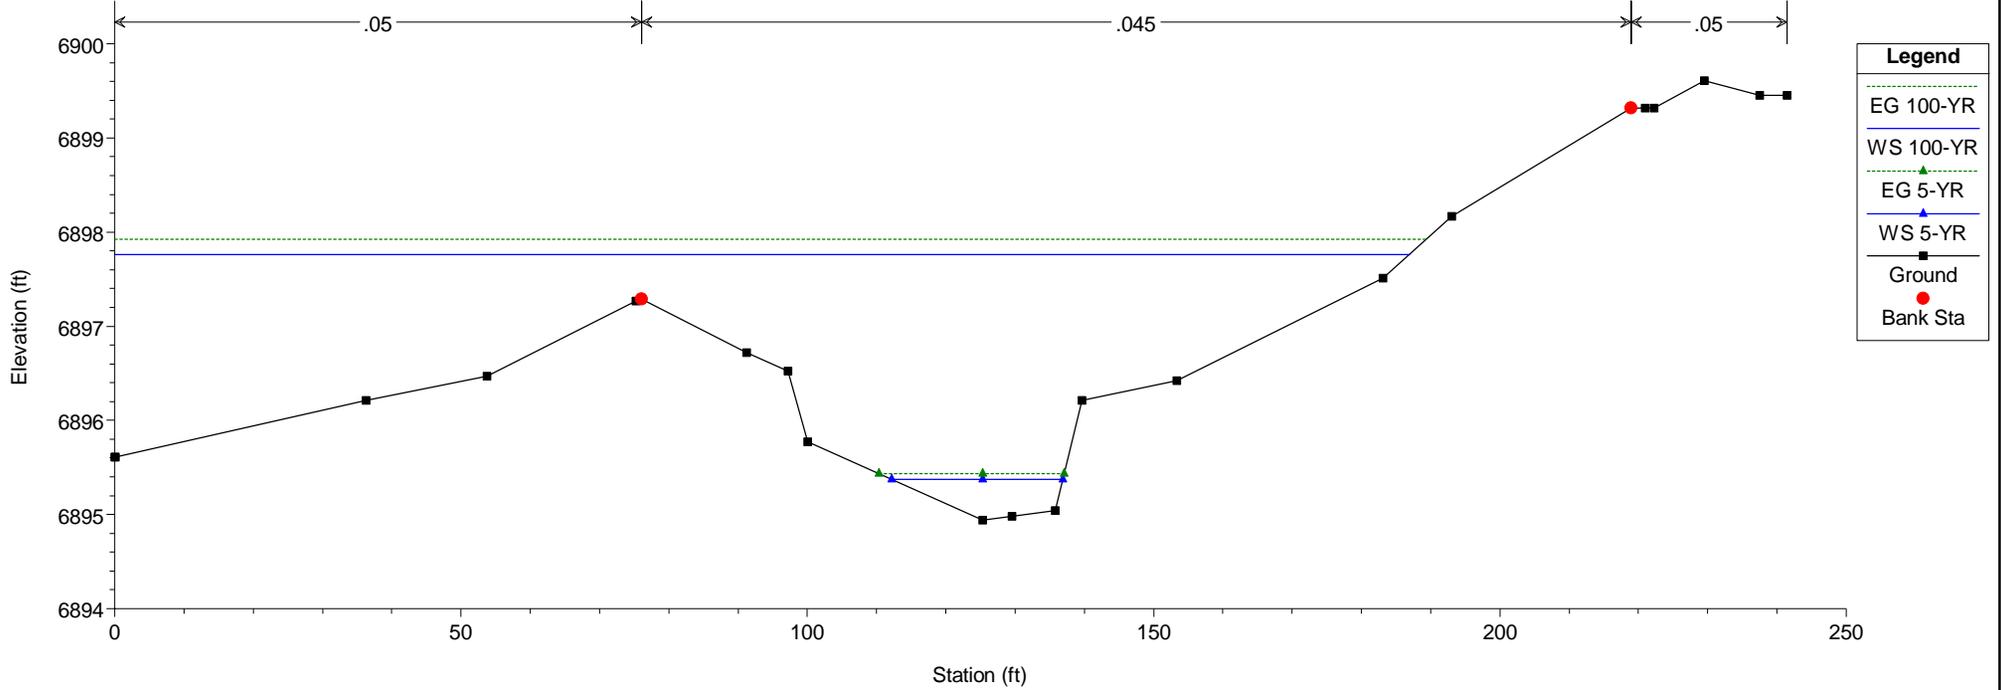


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1350

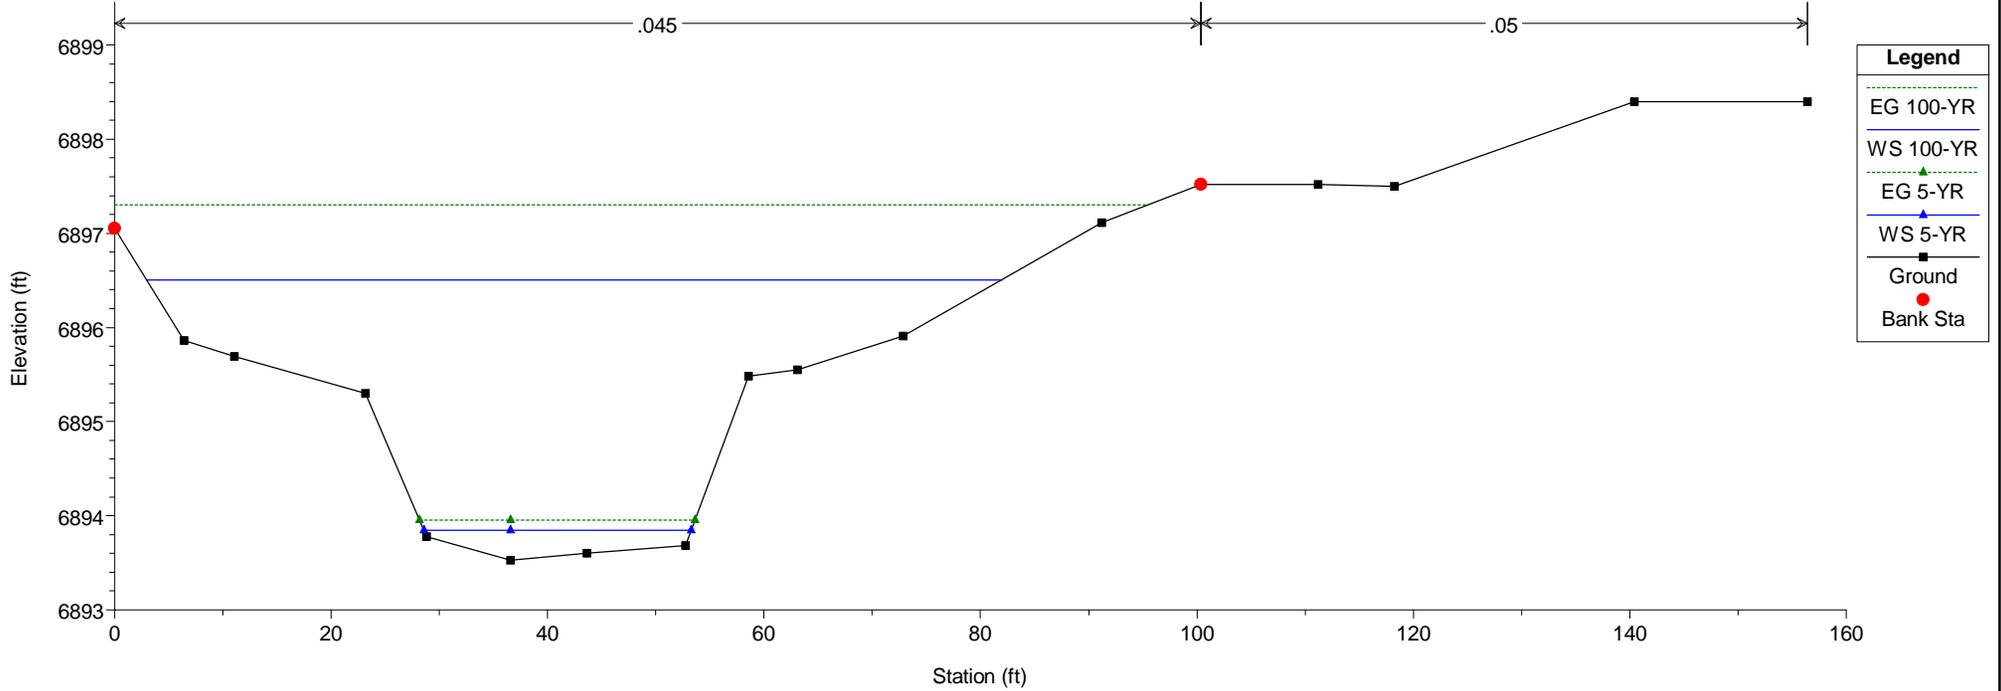



HEC-RAS Model Plan: Existing 5/21/2019

RS = 1300

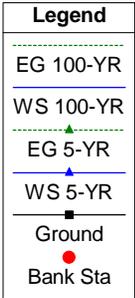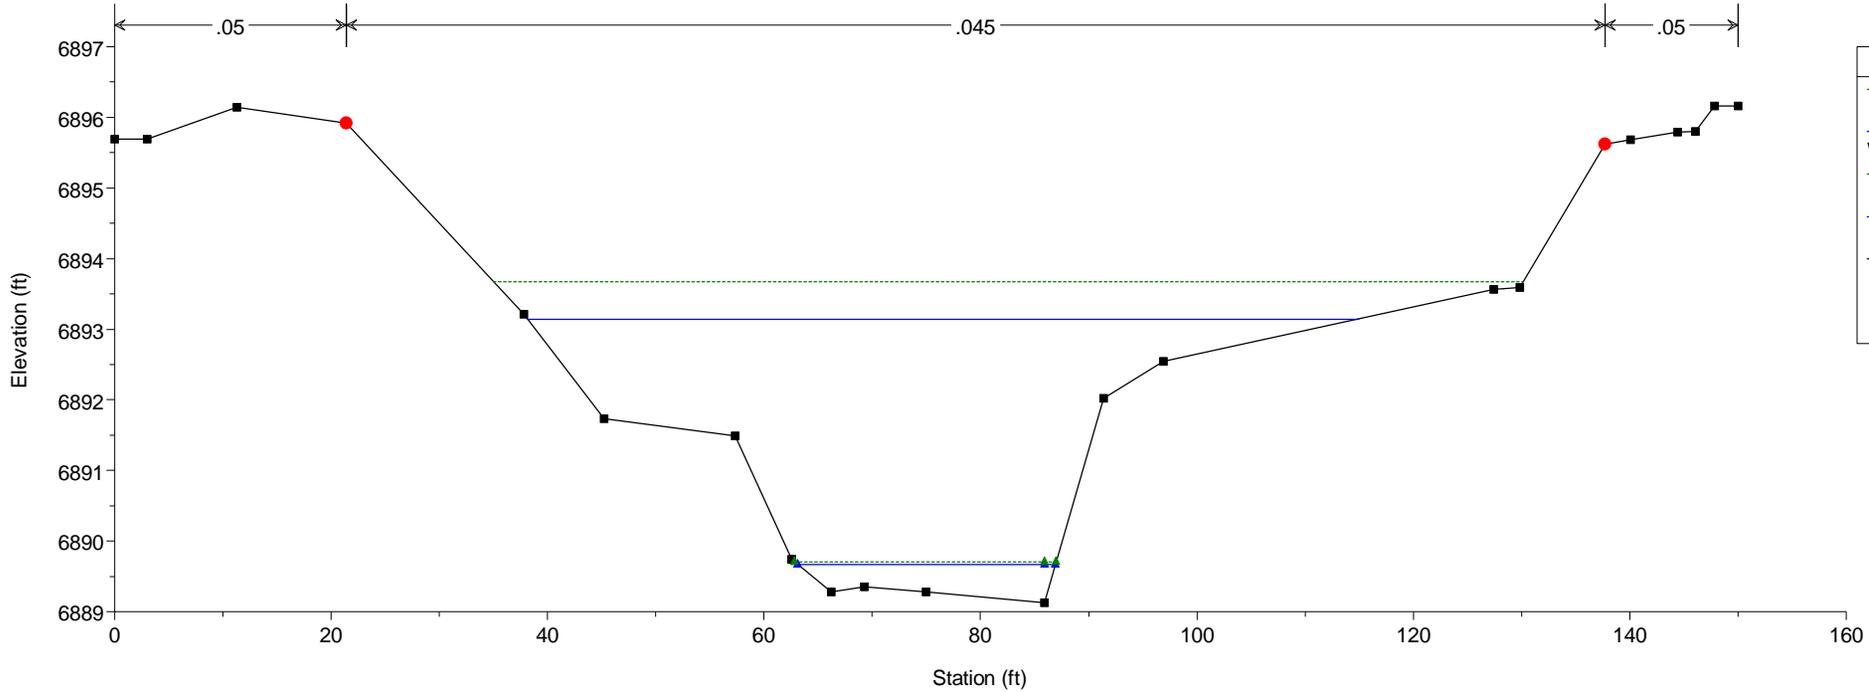



HEC-RAS Model Plan: Existing 5/21/2019

RS = 1250

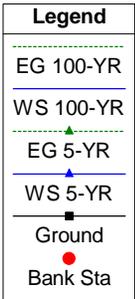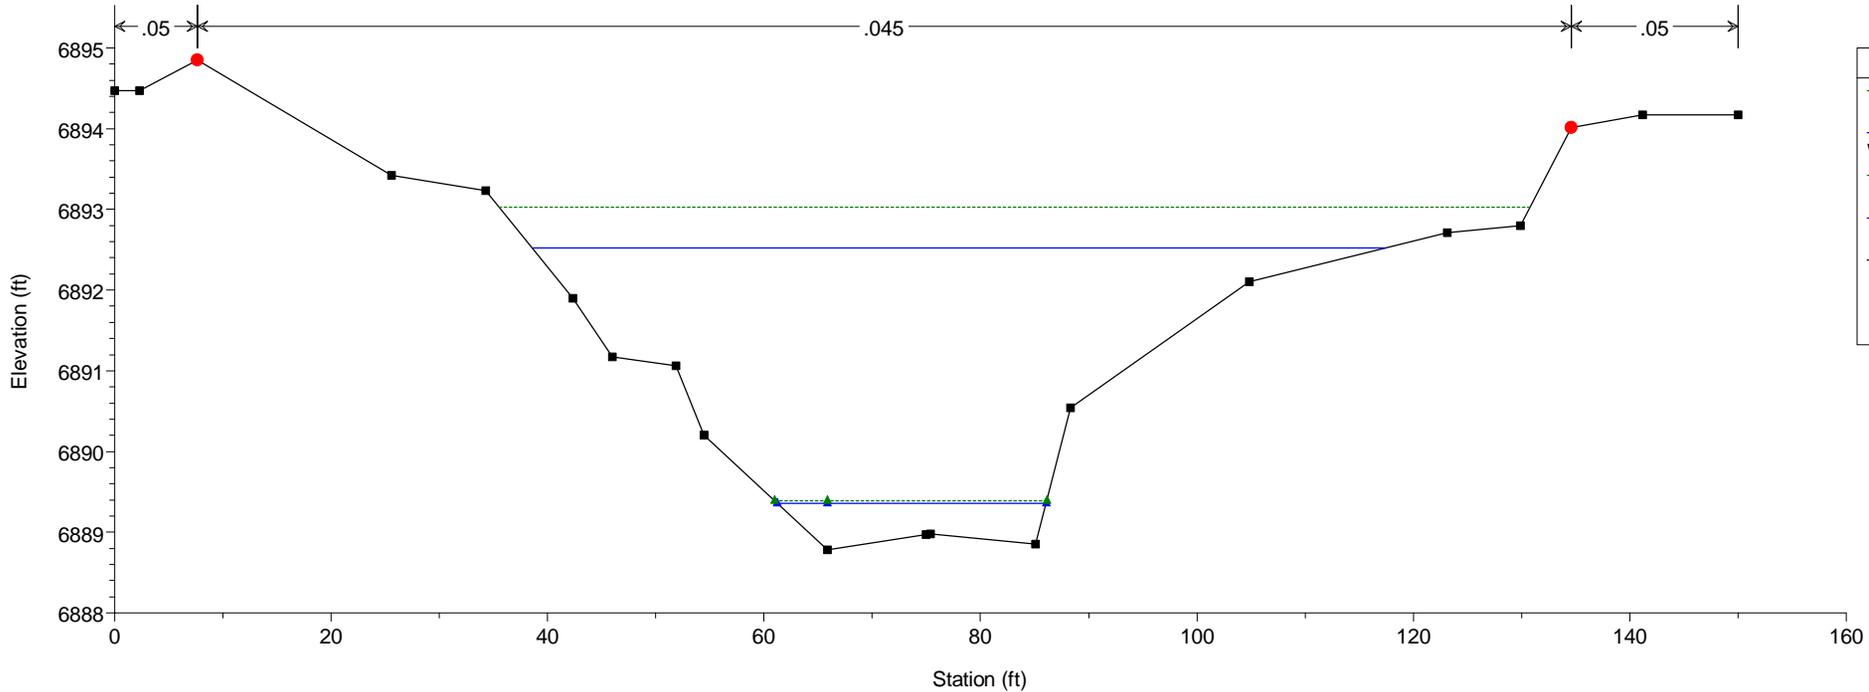



HEC-RAS Model Plan: Existing 5/21/2019

RS = 1200

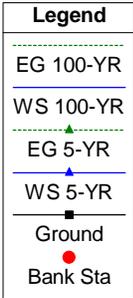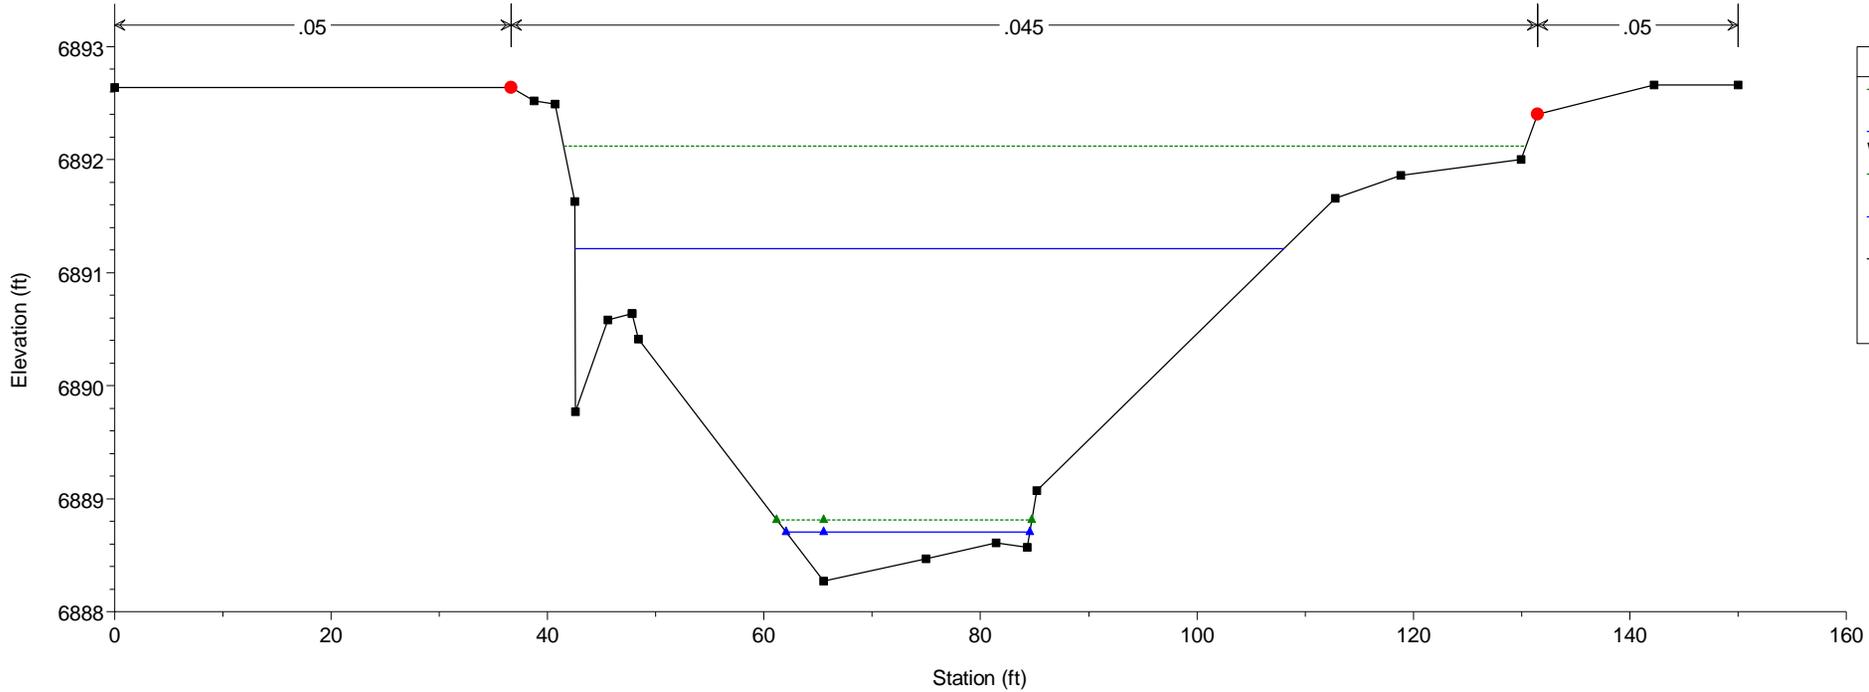


HEC-RAS Model Plan: Existing 5/21/2019


RS = 1150

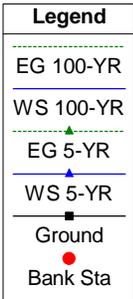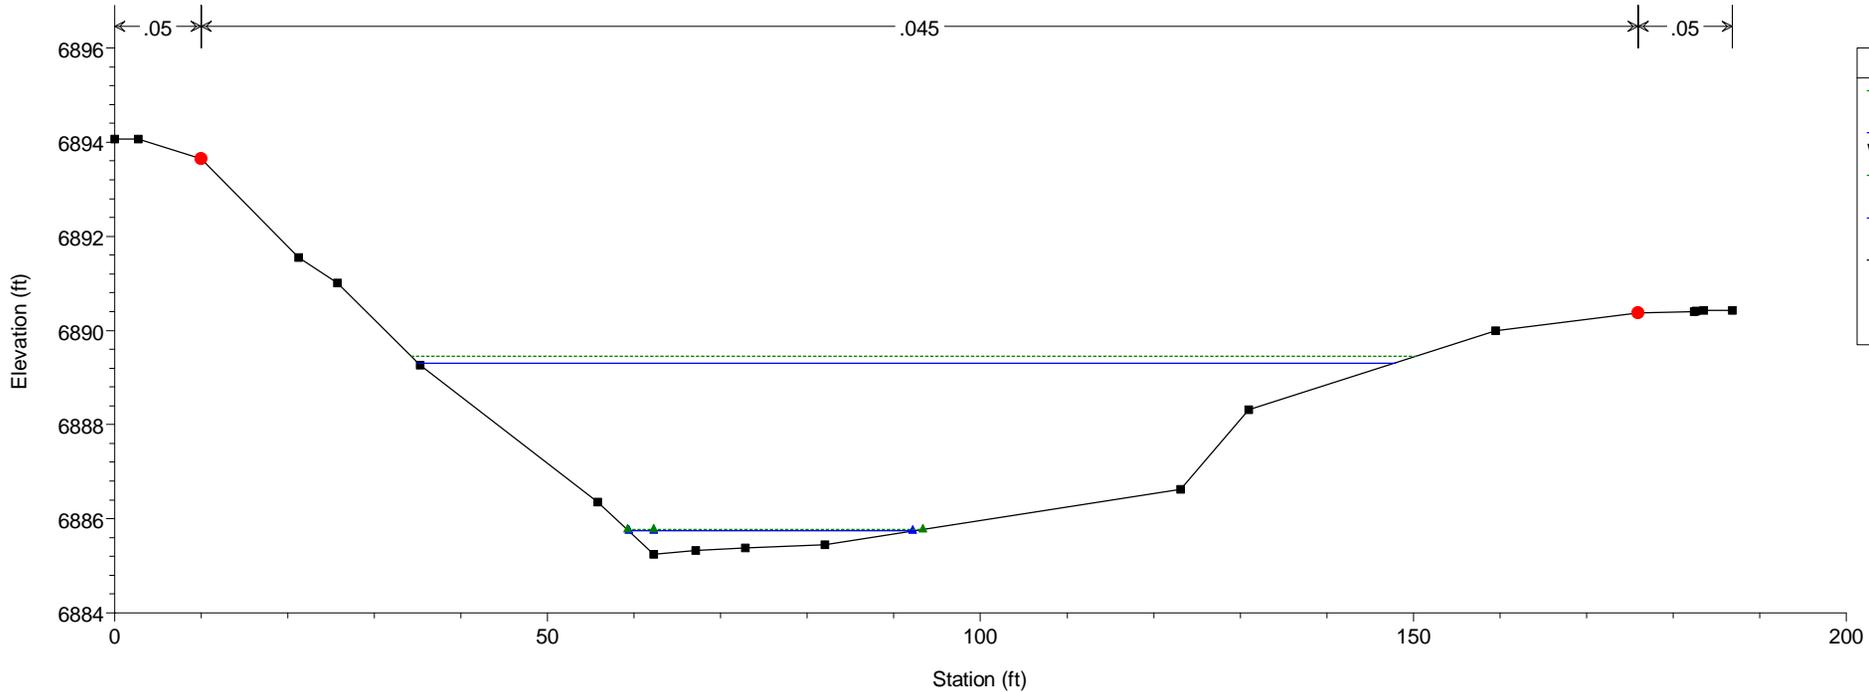


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1100

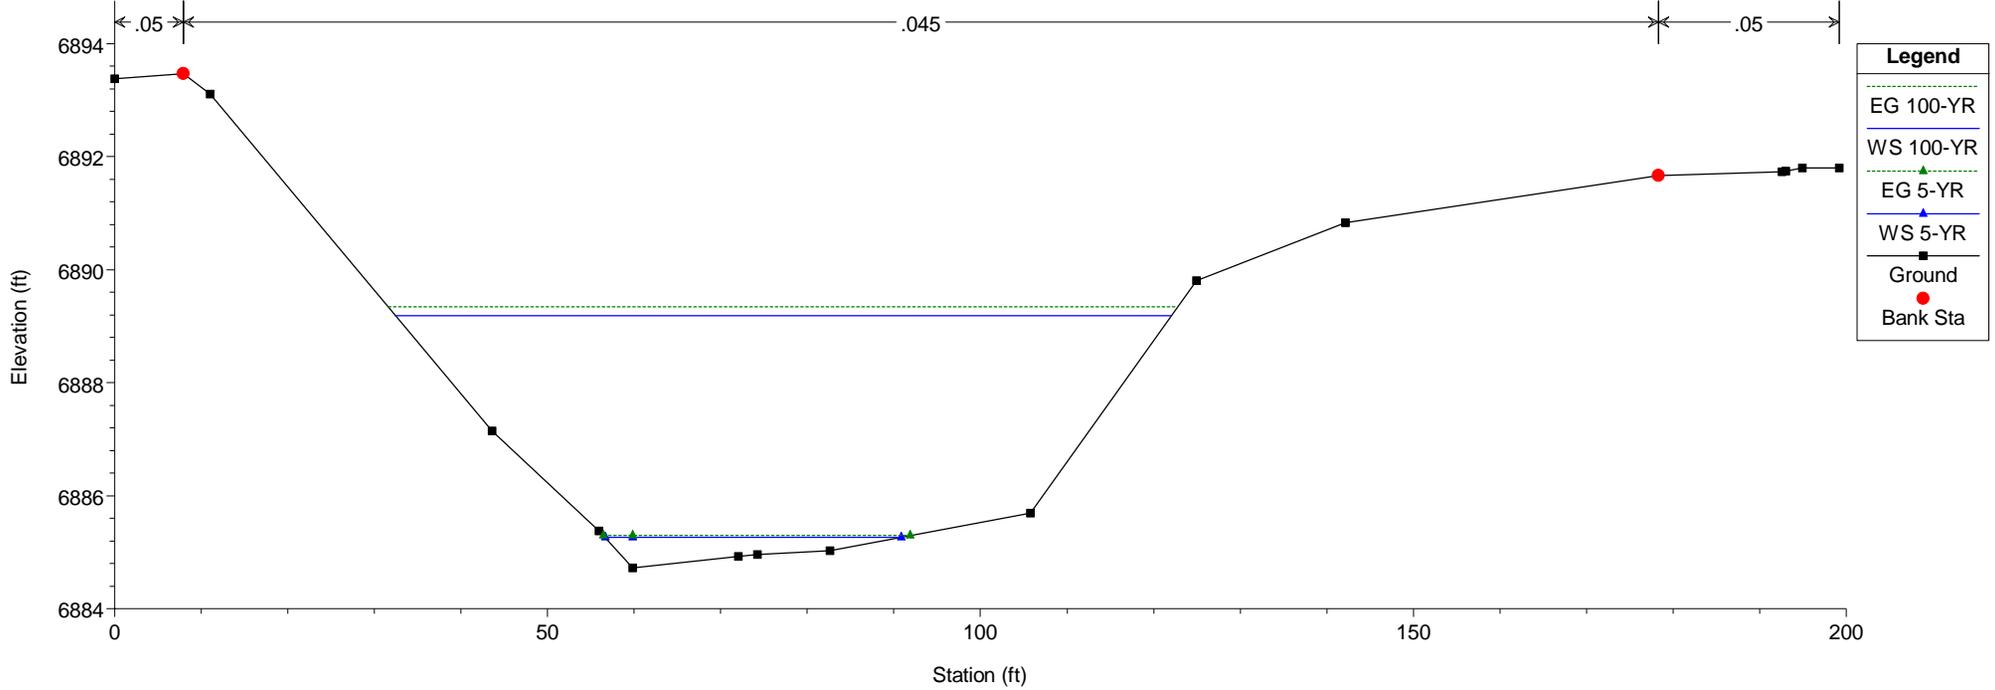


HEC-RAS Model Plan: Existing 5/21/2019
RS = 1050

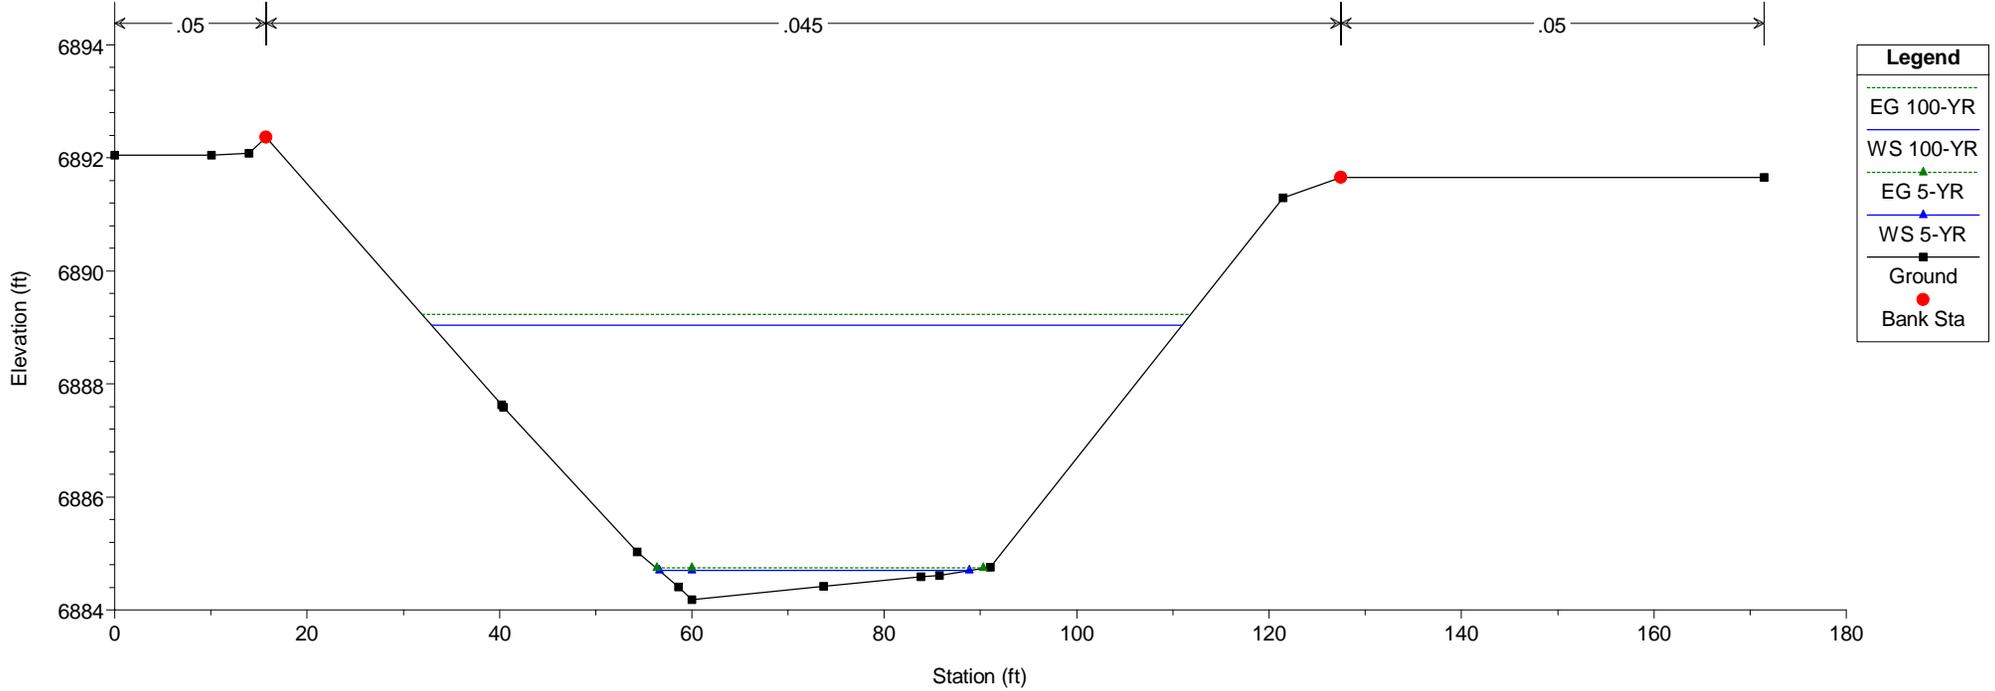

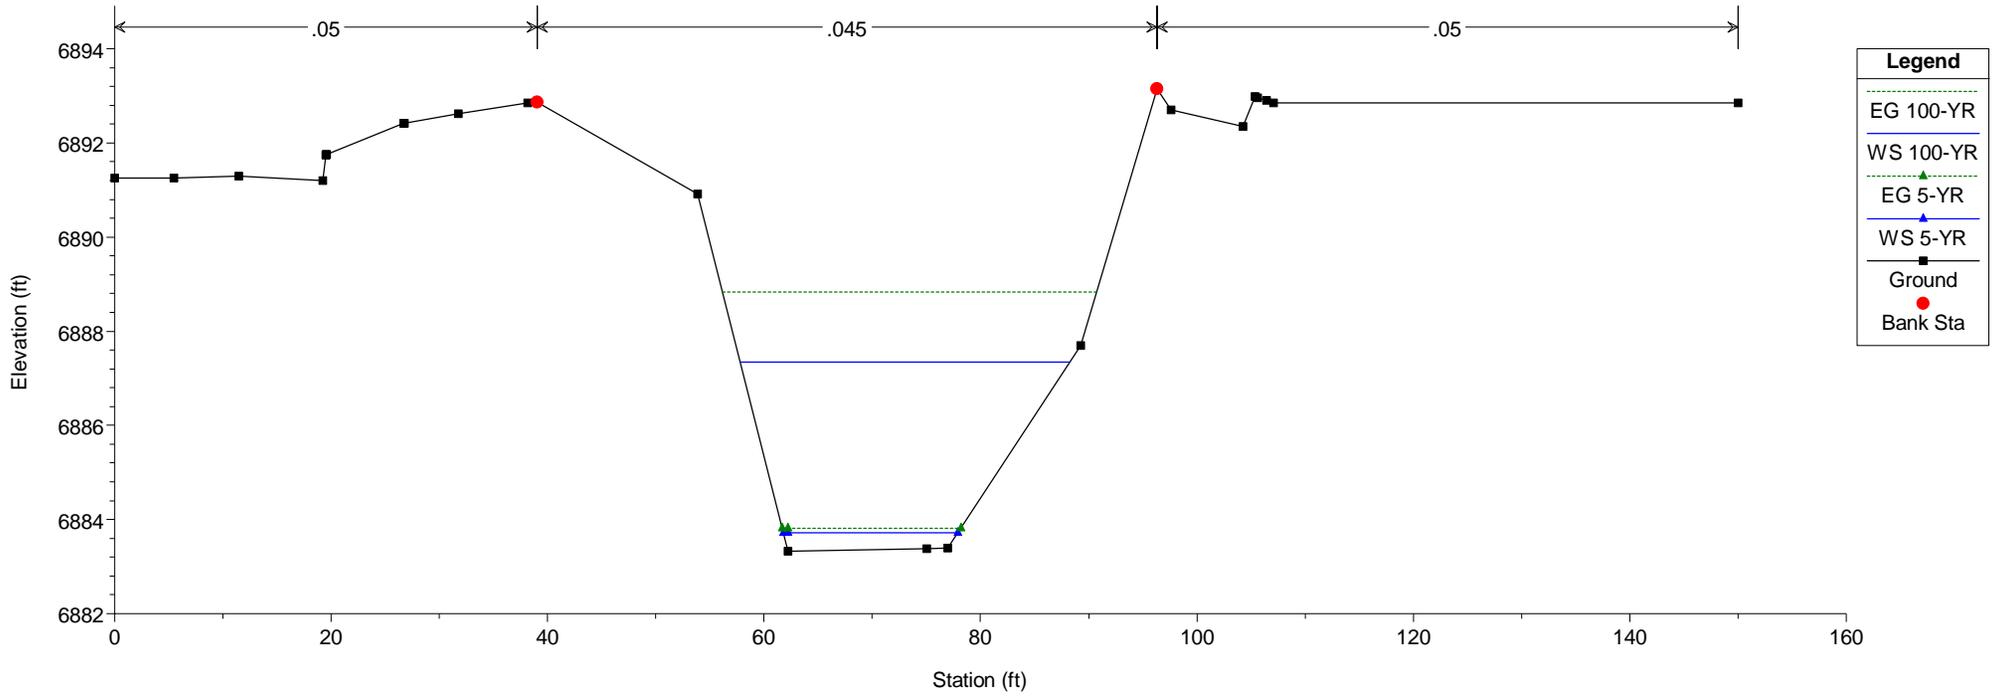

Proposed Conditions Model

66072557973196265730577021404.44

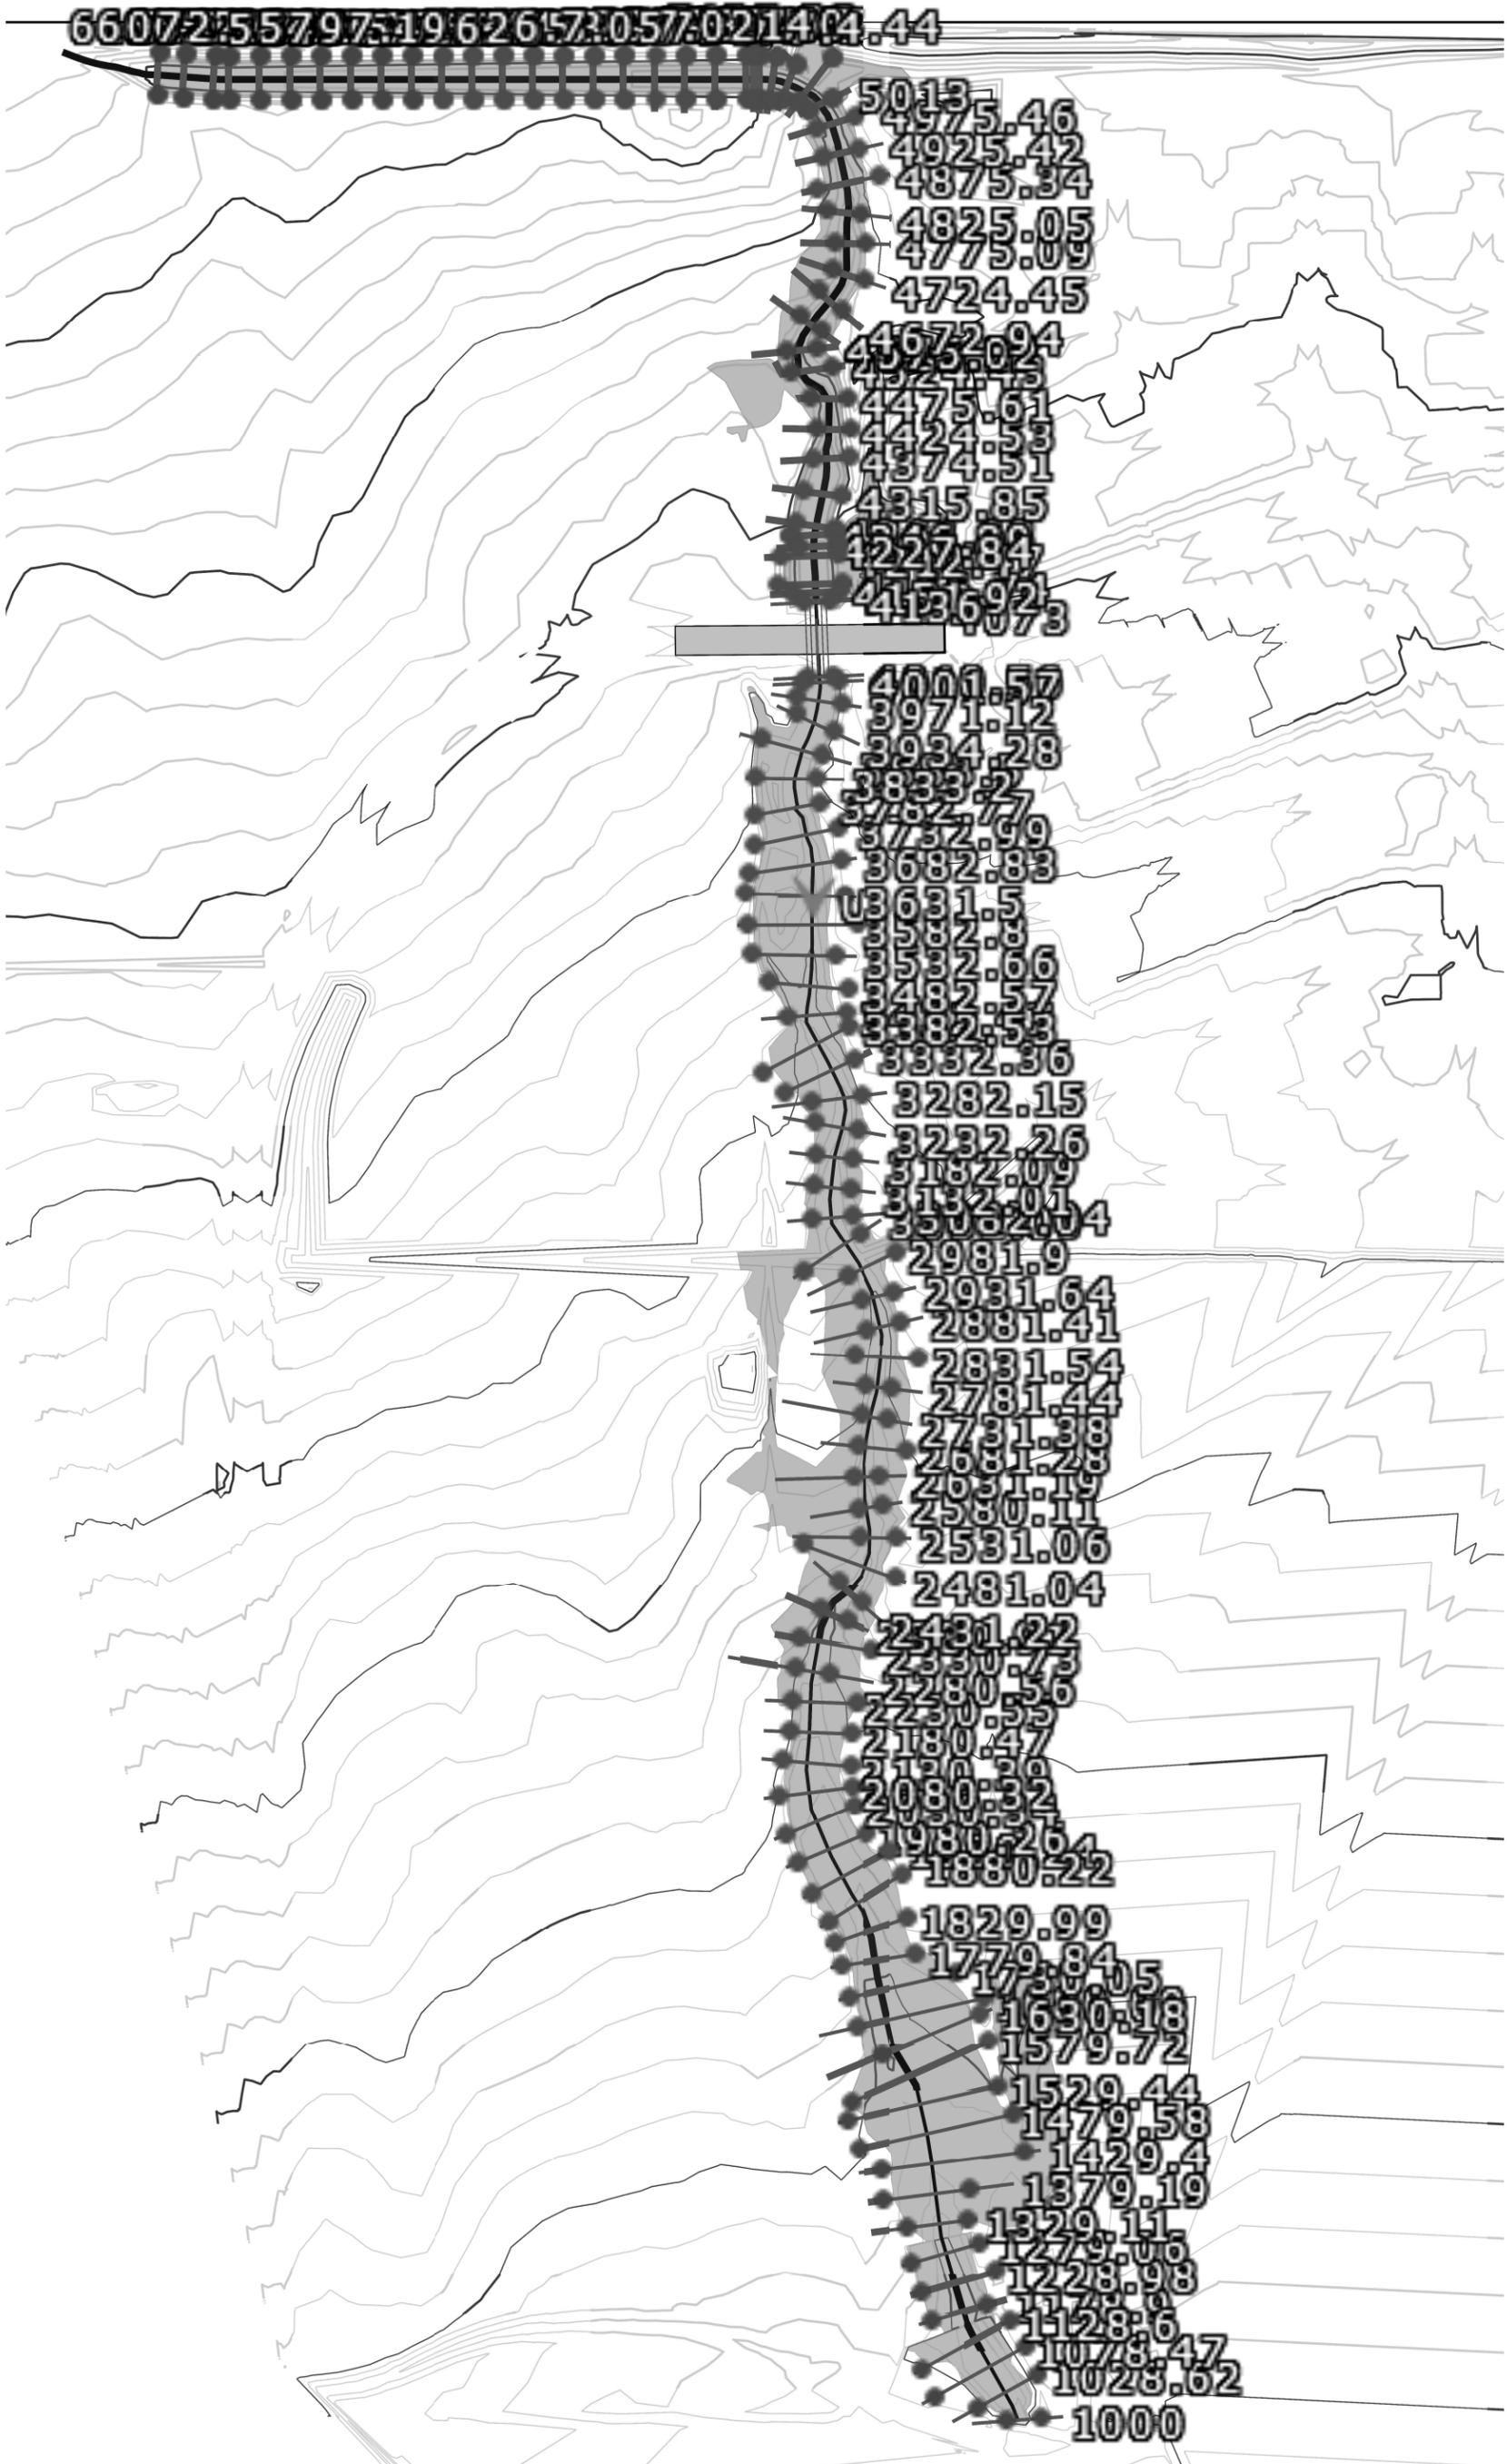

Phase 1

HEC-RAS HEC-RAS 5.0.7 March 2019
U. S. Army Corps of Engineers
Hydrologic Engineering Center
609 Second Street
Davis, California

| | | | | | | |
|----------|------|--------|------|------|--------|-------|
| X | X | XXXXXX | XXXX | XXXX | XX | XXXX |
| X | X | X | X X | X X | X X | X |
| X | X | X | X | X X | X X | X |
| XXXXXXXX | XXXX | X | XXX | XXXX | XXXXXX | XXXX |
| X | X | X | X | X X | X X | X |
| X | X | X | X X | X X | X X | X |
| X | X | XXXXXX | XXXX | X X | X X | XXXXX |

PROJECT DATA

Project Title: HEC-RAS Model
Project File : CLH14.20_Channel_10_17_2019_new_inputs.prj
Run Date and Time: 10/21/2019 6:50:03 AM

Project in English units

Project Description:

CRS Info=<Spatial Reference> <CoordinateSystem Code="3502"
Unit="US_survey_Foot" AcadCode="" /> <Registration OffsetX="0" OffsetY="0"
OffsetZ="0" ScaleX="1" ScaleY="1" ScaleZ="1" /></Spatial Reference>

PLAN DATA

Plan Title: Phase 1
Plan File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014.20-Bent Grass\3. Permit Const Docs\3.04
Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14.20_Channel_10_17_2019_new_inputs.p03

Geometry Title: Phase 1

Phase 1

Geometry File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014.20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14.20_Channel_10_17_2019_new_inputs.g03

Flow Title : Phase 1

Flow File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014.20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14.20_Channel_10_17_2019_new_inputs.f03

Plan Summary Information:

| | | |
|------------|----------------------|------------------------|
| Number of: | Cross Sections = 111 | Multiple Openings = 0 |
| | Culverts = 1 | Inline Structures = 0 |
| | Bridges = 0 | Lateral Structures = 0 |

Computational Information

| |
|---|
| Water surface calculation tolerance = 0.01 |
| Critical depth calculation tolerance = 0.01 |
| Maximum number of iterations = 20 |
| Maximum difference tolerance = 0.33 |
| Flow tolerance factor = 0.001 |

Computation Options

Critical depth computed only where necessary
 Conveyance Calculation Method: At breaks in n values only
 Friction Slope Method: Average Conveyance
 Computational Flow Regime: Subcritical Flow

FLOW DATA

Flow Title: Phase 1

Flow File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014.20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2 Prop Drain Rpt\Channel Design\GeoHecRas\CLH14.20_Channel_10_17_2019_new_inputs.f03

Flow Data (cfs)

| River | Reach | RS | DBPS 100-YR | DBPS 2-YR | FEMA 100-YR |
|---------|------------|---------|-------------|-----------|-------------|
| UT_BSC2 | NCONFL-BGM | 6115.07 | 1000 | 100 | 1000 |
| UT_BSC2 | NCONFL-BGM | 5045.44 | 1200 | 110 | 1482 |

Phase 1

Boundary Conditions

| River | Reach | Profile | Upstream | Downstream |
|---------|------------|-------------|----------|---------------------|
| UT_BSC2 | NCONFL-BGM | DBPS 100-YR | | Normal S = 0.025094 |
| UT_BSC2 | NCONFL-BGM | DBPS 2-YR | | Normal S = 0.025094 |
| UT_BSC2 | NCONFL-BGM | FEMA 100-YR | | Normal S = 0.025094 |

GEOMETRY DATA

Geometry Title: Phase 1

Geometry File : H:\Challenger Homes Inc\C0, El Paso County-CLH0000014.20-Bent Grass\3. Permit Const Docs\3.04 Grad-Drain\3.04.2 Prop Drain Rpt\Channel Desi gn\GeoHecRas\CLH14.20_Channel_10_17_2019_new_inputs.g03

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM

RS: 6115.07

INPUT

Description:

Station Elevation Data num= 42

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6975.45 | .08 | 6975.45 | .74 | 6975.41 | .82 | 6975.4 | 2.11 | 6975.36 |
| 2.79 | 6975.34 | 3.14 | 6975.33 | 4.81 | 6975.21 | 4.87 | 6975.19 | 4.94 | 6974.73 |
| 27.86 | 6969 | 28.94 | 6968.73 | 30.78 | 6968.73 | 40.57 | 6968.73 | 52.37 | 6968.74 |
| 52.88 | 6968.74 | 52.89 | 6968.74 | 53.01 | 6968.74 | 54.94 | 6968.74 | 60.85 | 6970.36 |
| 75.99 | 6974.79 | 76.18 | 6974.79 | 78.39 | 6974.74 | 78.94 | 6974.74 | 79.58 | 6974.68 |
| 79.97 | 6974.65 | 81.37 | 6974.53 | 81.38 | 6974.52 | 81.39 | 6974.52 | 81.41 | 6974.52 |
| 81.42 | 6974.51 | 81.45 | 6974.51 | 81.47 | 6974.5 | 81.51 | 6974.49 | 81.56 | 6974.48 |
| 81.6 | 6974.47 | 81.64 | 6974.46 | 81.76 | 6974.43 | 82.04 | 6974.37 | 83.23 | 6974.59 |
| 83.47 | 6974.6 | 83.94 | 6974.64 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .045 | 4.94 | .04 | 75.99 | .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 4.94 75.99 42.96 42.96 42.96 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 6072.11

INPUT

Description:

Station Elevation Data num= 22

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6975.43 | .52 | 6975.43 | .55 | 6975.47 | 1.23 | 6975.47 | 1.29 | 6975.47 |
| 1.32 | 6975.47 | 5.27 | 6975.41 | 5.57 | 6975.4 | 5.65 | 6975.4 | 5.77 | 6975.4 |
| 5.85 | 6975.37 | 8.21 | 6974.58 | 8.58 | 6974.49 | 32.21 | 6968.58 | 44.48 | 6968.58 |
| 57.99 | 6968.58 | 58.21 | 6968.58 | 82.09 | 6974.56 | 82.21 | 6974.59 | 87.19 | 6974.49 |
| 87.21 | 6974.49 | 87.23 | 6974.48 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .045 | 8.21 | .04 | 82.09 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 8.21 82.09 49.27 49.27 49.27 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 6022.84

INPUT

Description:

Station Elevation Data num= 30

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6976.92 | .12 | 6977.04 | .2 | 6977.04 | .21 | 6977.04 | .22 | 6977.04 |
| .23 | 6977.04 | .25 | 6977.04 | .27 | 6977.04 | .29 | 6977.04 | .32 | 6977.04 |
| .37 | 6977.04 | .44 | 6977.04 | .57 | 6977.03 | .83 | 6977.02 | .98 | 6977.02 |
| 3.28 | 6976.93 | 3.47 | 6976.92 | 3.49 | 6976.92 | 3.53 | 6976.92 | 11 | 6974.42 |
| 11.05 | 6974.41 | 34.68 | 6968.5 | 35.05 | 6968.41 | 35.45 | 6968.41 | 48.04 | 6968.41 |

Phase 1

61.05 6968.41 61.61 6968.55 85.05 6974.41 85.2 6974.41 90.05 6974.31

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 11.05 .04 85.05 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 11.05 85.05 24.9 24.9 24.9 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5997.93

INPUT

Description:

Station Elevation Data num= 17
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6977.05 .8 6977.08 .84 6977.08 2.67 6977.14 2.91 6977.15
 3.1 6977.15 11.17 6974.46 11.58 6974.33 12.74 6974.03 35.58 6968.32
 36.71 6968.32 48.79 6968.32 61.58 6968.32 84.75 6974.12 85.58 6974.32
 85.75 6974.32 90.58 6974.22

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 12.74 .04 84.75 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 12.74 84.75 50.34 50.34 50.34 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5947.6

INPUT

Description:

Station Elevation Data num= 19
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev

Phase 1

| | | | | | | | | | |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6976.63 | 2.34 | 6976.56 | 2.56 | 6976.55 | 2.62 | 6976.55 | 2.71 | 6976.55 |
| 2.83 | 6976.51 | 9.91 | 6974.15 | 10.26 | 6974.06 | 33.91 | 6968.15 | 34.21 | 6968.15 |
| 47.18 | 6968.15 | 59.91 | 6968.15 | 83.77 | 6974.11 | 83.91 | 6974.15 | 83.94 | 6974.15 |
| 88.91 | 6974.05 | 90.07 | 6974.34 | 90.77 | 6974.31 | 95.08 | 6974.16 | | |

Manning's n Values

| | | | |
|---------|------|---------|------|
| num= | 3 | | |
| Station | Val | Station | Val |
| 0 | .045 | 9.91 | .04 |
| | | 83.77 | .045 |

| | | | | | | | | |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 9.91 | 83.77 | | 50.74 | 50.74 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5896.86

INPUT
 Description:

| | | | | | | | | | |
|---------|-----------|-------|---------|-------|---------|-------|---------|-------|---------|
| Station | Elevation | Data | num= | 19 | | | | | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6976.17 | 2.88 | 6976.08 | 4.15 | 6976.04 | 4.28 | 6976.04 | 4.45 | 6976.04 |
| 10.55 | 6974 | 10.64 | 6973.97 | 34.22 | 6968.08 | 34.64 | 6967.97 | 35.11 | 6967.97 |
| 47.97 | 6967.97 | 60.64 | 6967.97 | 84.08 | 6973.83 | 84.64 | 6973.97 | 84.76 | 6973.97 |
| 89.64 | 6973.87 | 89.66 | 6973.87 | 91.05 | 6974.22 | 95.08 | 6974.12 | | |

Manning's n Values

| | | | |
|---------|------|---------|------|
| num= | 3 | | |
| Station | Val | Station | Val |
| 0 | .045 | 10.64 | .04 |
| | | 84.64 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 10.64 | 84.64 | | 49.32 | 49.32 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5847.54

INPUT

Phase 1

Description:

| Station | | Elevation | | Data | | num= | | 19 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6975.72 | 1.38 | 6975.69 | 1.83 | 6975.68 | 1.95 | 6975.68 | 2.16 | 6975.67 |
| 2.28 | 6975.63 | 7.78 | 6973.8 | 31.5 | 6967.87 | 31.78 | 6967.8 | 45.17 | 6967.8 |
| 57.68 | 6967.8 | 57.78 | 6967.8 | 71.83 | 6971.31 | 81.78 | 6973.8 | 86.76 | 6973.7 |
| 86.78 | 6973.7 | 86.85 | 6973.71 | 87.76 | 6973.63 | 93.48 | 6973.53 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 7.78 | .04 | 81.78 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 7.78 | 81.78 | | 50.34 | 50.34 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5797.19

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 18 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6975.51 | 4.27 | 6975.36 | 4.42 | 6975.35 | 4.47 | 6975.35 | 4.54 | 6975.35 |
| 4.57 | 6975.34 | 9.71 | 6973.62 | 9.82 | 6973.6 | 25.6 | 6969.65 | 33.71 | 6967.62 |
| 47.16 | 6967.62 | 59.47 | 6967.62 | 59.72 | 6967.62 | 83.32 | 6973.52 | 83.72 | 6973.62 |
| 83.8 | 6973.62 | 88.72 | 6973.52 | 88.75 | 6973.51 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 9.71 | .04 | 83.32 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 9.71 | 83.32 | | 49.93 | 49.93 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

Phase 1

REACH: NCONFL-BGM

RS: 5747.26

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 17 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6975.26 | 2.91 | 6975.17 | 3.14 | 6975.16 | 3.2 | 6975.16 | 3.32 | 6975.16 |
| 8.41 | 6973.46 | 8.45 | 6973.45 | 32.43 | 6967.45 | 32.45 | 6967.45 | 34.69 | 6967.45 |
| 45.96 | 6967.45 | 58.45 | 6967.45 | 58.61 | 6967.49 | 82.45 | 6973.45 | 87.38 | 6973.35 |
| 87.45 | 6973.35 | 87.48 | 6973.34 | | | | | | |

Manning's n Values

num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .045 | 8.41 | .04 | 82.45 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 8.41 | 82.45 | | 49.94 | 49.94 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM

RS: 5697.32

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 17 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6975.21 | 3.56 | 6975.12 | 3.85 | 6975.11 | 3.93 | 6975.11 | 4.08 | 6975.11 |
| 9.53 | 6973.29 | 9.58 | 6973.27 | 33.51 | 6967.29 | 33.58 | 6967.27 | 44.79 | 6967.27 |
| 47.15 | 6967.27 | 59.48 | 6967.27 | 59.58 | 6967.27 | 59.68 | 6967.3 | 83.58 | 6973.27 |
| 88.52 | 6973.17 | 88.58 | 6973.17 | | | | | | |

Manning's n Values

num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .045 | 9.58 | .04 | 83.58 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 9.58 | 83.58 | | 50.96 | 50.96 | | .1 | .3 |

CROSS SECTION

Phase 1

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5646.36

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 15 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6974.82 | 1.49 | 6974.77 | 2.18 | 6974.75 | 3.01 | 6974.73 | 3.27 | 6974.64 |
| 7.92 | 6973.09 | 9.04 | 6972.81 | 31.92 | 6967.09 | 45.54 | 6967.09 | 56.97 | 6967.09 |
| 57.92 | 6967.09 | 81.16 | 6972.91 | 81.92 | 6973.09 | 82.07 | 6973.09 | 86.92 | 6972.99 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 9.04 | .04 | 81.16 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 9.04 | 81.16 | | 49.7 | 49.7 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5596.65

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 17 | |
|---------|---------|-----------|---------|------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6974.98 | .61 | 6974.95 | 2.43 | 6974.87 | 2.62 | 6974.86 | 2.86 | 6974.85 |
| 2.95 | 6974.82 | 8.65 | 6972.92 | 9.06 | 6972.82 | 32.65 | 6966.92 | 33.27 | 6966.92 |
| 46.33 | 6966.92 | 58.65 | 6966.92 | 59.4 | 6967.11 | 82.65 | 6972.92 | 87.46 | 6972.82 |
| 87.65 | 6972.82 | 87.77 | 6972.79 | | | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 9.06 | .04 | 82.65 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 9.06 | 82.65 | | 49.95 | 49.95 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5546.7

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 16 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6975.24 | 3.2 | 6975.09 | 4.64 | 6975.03 | 4.79 | 6975.02 | 4.98 | 6975.01 |
| 5.08 | 6974.98 | 11.78 | 6972.74 | 35.27 | 6966.87 | 35.78 | 6966.74 | 49.52 | 6966.74 |
| 61.05 | 6966.74 | 61.78 | 6966.74 | 62.47 | 6966.92 | 85.78 | 6972.74 | 90.6 | 6972.65 |
| 90.78 | 6972.64 | | | | | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 11.78 | .04 | 85.78 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 11.78 | 85.78 | | 49.33 | 49.33 | 49.33 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5497.37

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 17 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6974.99 | 3.45 | 6974.85 | 3.6 | 6974.84 | 3.64 | 6974.84 | 3.72 | 6974.84 |
| 3.76 | 6974.82 | 10.52 | 6972.57 | 34.45 | 6966.59 | 34.52 | 6966.57 | 34.59 | 6966.57 |
| 48.32 | 6966.57 | 60.52 | 6966.57 | 63.01 | 6967.19 | 84.46 | 6972.56 | 84.52 | 6972.57 |
| 84.53 | 6972.57 | 89.52 | 6972.47 | | | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 10.52 | .04 | 84.46 | .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 10.52 84.46 49.32 49.32 49.32 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5448.05

INPUT

Description:

Station Elevation Data num= 17

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6974.39 | 2.57 | 6974.27 | 3.85 | 6974.21 | 4.2 | 6974.19 | 4.76 | 6974.17 |
| 5.02 | 6974.08 | 10.05 | 6972.4 | 10.97 | 6972.17 | 34.05 | 6966.4 | 47.91 | 6966.4 |
| 59.39 | 6966.4 | 60.05 | 6966.4 | 83.59 | 6972.28 | 84.05 | 6972.4 | 88.96 | 6972.3 |
| 89.06 | 6972.3 | 89.18 | 6972.27 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .045 | 10.97 | .04 | 83.59 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 10.97 83.59 50.15 50.15 50.15 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5397.9

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6973.62 | 2.95 | 6973.49 | 4.01 | 6973.44 | 4.3 | 6973.44 | 4.81 | 6973.42 |
| 4.91 | 6973.38 | 8.39 | 6972.22 | 9.03 | 6972.06 | 32.39 | 6966.22 | 46.3 | 6966.22 |
| 57.83 | 6966.22 | 58.39 | 6966.22 | 81.94 | 6972.11 | 82.39 | 6972.22 | 82.48 | 6972.22 |
| 87.39 | 6972.12 | | | | | | | | |

Phase 1

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 9.03 .04 81.94 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 9.03 81.94 49.15 49.15 49.15 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5348.75

INPUT

Description:

Station Elevation Data num= 16
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6974.19 .6 6974.16 2.52 6974.08 3.05 6974.05 4.05 6974.01
 9.63 6972.15 9.92 6972.05 32.52 6966.4 33.92 6966.05 35.44 6966.05
 47.89 6966.05 59.92 6966.05 61.25 6966.38 83.92 6972.05 88.66 6971.96
 88.92 6971.95

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 9.92 .04 83.92 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 9.92 83.92 51.73 51.73 51.73 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5297.02

INPUT

Description:

Station Elevation Data num= 20
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6974.75 1.96 6974.68 3.67 6974.62 3.84 6974.61 4.05 6974.6
 4.18 6974.56 12.25 6971.87 35.93 6965.95 36.25 6965.87 36.6 6965.87

Phase 1

| | | | | | | | | | |
|-------|---------|-------|---------|-------|---------|-------|---------|--------|---------|
| 50.28 | 6965.87 | 62.25 | 6965.87 | 85.99 | 6971.81 | 86.25 | 6971.87 | 91.2 | 6971.77 |
| 91.25 | 6971.77 | 98.08 | 6973.48 | 98.17 | 6973.5 | 99.45 | 6973.49 | 104.67 | 6973.42 |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 12.25 | .04 | 85.99 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 12.25 | 85.99 | | 48.95 48.95 | 48.95 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5248.07

INPUT

Description:

Station Elevation Data num= 19

| | | | | | | | | | |
|-------|---------|-------|---------|--------|---------|--------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6974.53 | 4.15 | 6974.51 | 4.62 | 6974.5 | 4.76 | 6974.5 | 4.98 | 6974.5 |
| 5.16 | 6974.44 | 13.38 | 6971.7 | 13.91 | 6971.56 | 37.39 | 6965.7 | 51.48 | 6965.7 |
| 62.56 | 6965.7 | 63.39 | 6965.7 | 86.51 | 6971.48 | 87.39 | 6971.7 | 87.57 | 6971.69 |
| 92.39 | 6971.6 | 92.74 | 6971.69 | 105.01 | 6974.75 | 108.26 | 6974.74 | | |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 13.91 | .04 | 86.51 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 13.91 | 86.51 | | 49.93 49.93 | 49.93 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5198.14

INPUT

Description:

Station Elevation Data num= 19

Phase 1

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|-------|---------|--------|---------|-------|---------|
| 0 | 6973.86 | 4.44 | 6973.84 | 5.57 | 6973.83 | 5.89 | 6973.83 | 6.4 | 6973.83 |
| 6.69 | 6973.73 | 13.32 | 6971.52 | 36.5 | 6965.73 | 37.32 | 6965.52 | 38.2 | 6965.52 |
| 51.47 | 6965.52 | 63.32 | 6965.52 | 64.07 | 6965.71 | 87.32 | 6971.52 | 92.18 | 6971.43 |
| 92.32 | 6971.42 | 98.62 | 6973 | 98.91 | 6973.07 | 103.07 | 6973.05 | | |

Manning's n Values

| Station | Value | Station | Value | Station | Value |
|---------|-------|---------|-------|---------|-------|
| 0 | .045 | 13.32 | .04 | 87.32 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 13.32 | 87.32 | | 50.88 | 50.88 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5147.26

INPUT

Description:

| Station | Elevation | Data | num= | 20 | Station | Elevation | Station | Elevation | Station | Elevation |
|---------|-----------|-------|---------|-------|---------|-----------|---------|-----------|---------|-----------|
| 0 | 6972.44 | 8.82 | 6972.26 | 9.64 | 6972.24 | 12.38 | 6971.32 | 12.9 | 6971.14 | |
| 36.13 | 6965.3 | 36.91 | 6965.1 | 37.5 | 6965.1 | 40.92 | 6965.1 | 51.11 | 6965.08 | |
| 62.71 | 6965.06 | 62.91 | 6965.06 | 86.53 | 6970.93 | 86.91 | 6971.02 | 91.82 | 6970.91 | |
| 91.91 | 6970.91 | 91.96 | 6970.92 | 92.23 | 6970.99 | 93.7 | 6970.98 | 95.22 | 6970.96 | |

Manning's n Values

| Station | Value | Station | Value | Station | Value |
|---------|-------|---------|-------|---------|-------|
| 0 | .045 | 12.9 | .04 | 86.53 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 12.9 | 86.53 | | 12.18 | 12.18 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5135.07

Phase 1

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 18 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6971.75 | 1.9 | 6971.71 | 3.55 | 6971.68 | 12.8 | 6968.57 | 14.18 | 6968.11 |
| 23.76 | 6965.7 | 38.18 | 6962.06 | 48.29 | 6962.04 | 52.4 | 6962.03 | 64.18 | 6962.01 |
| 73.27 | 6964.26 | 88.18 | 6967.96 | 90.04 | 6967.92 | 93.18 | 6967.85 | 93.2 | 6967.85 |
| 103.29 | 6970.36 | 103.84 | 6970.35 | 107.58 | 6970.31 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 14.18 | .04 | 88.18 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 14.18 | 88.18 | | 9.79 | 9.79 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 5125.28

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 24 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6971.22 | .39 | 6971.22 | 2.5 | 6971.24 | 3.66 | 6971.2 | 3.73 | 6971.19 |
| 3.77 | 6971.19 | 4.03 | 6971.18 | 19.12 | 6966.15 | 19.31 | 6966.09 | 19.76 | 6965.98 |
| 43.32 | 6960.09 | 44.77 | 6960.09 | 57.55 | 6960.09 | 69.32 | 6960.09 | 90.52 | 6965.39 |
| 93.33 | 6966.09 | 97.54 | 6966 | 98.33 | 6965.99 | 101.55 | 6966.79 | 113.91 | 6969.88 |
| 114.02 | 6969.88 | 114.27 | 6969.88 | 114.28 | 6969.88 | 115.04 | 6969.87 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 19.76 | .04 | 93.33 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 19.76 | 93.33 | | 21.27 | 21.27 | | .1 | .3 |

CROSS SECTION

Phase 1

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5104.02

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 23 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6969.3 | 4.95 | 6969.12 | 7.02 | 6969.05 | 14.96 | 6966.4 | 16.13 | 6966.02 |
| 36.3 | 6960.97 | 40.13 | 6960.01 | 53.07 | 6960.01 | 61.5 | 6960.01 | 66.13 | 6960.01 |
| 85.13 | 6964.77 | 90.12 | 6966.01 | 91.49 | 6965.99 | 95.12 | 6965.91 | 99.43 | 6966.99 |
| 109.06 | 6969.39 | 109.12 | 6969.39 | 109.41 | 6969.39 | 109.69 | 6969.39 | 109.95 | 6969.39 |
| 110.07 | 6969.39 | 110.17 | 6969.39 | 111.27 | 6969.39 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 16.13 | .04 | 90.12 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--|--------------|-------|-------|--------|--------|
| | 16.13 | 90.12 | | | 26.62 | 26.62 | 26.62 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5077.4

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 23 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6968.63 | .68 | 6968.57 | 1.55 | 6968.5 | 9.4 | 6967.39 | 13.89 | 6966.61 |
| 22 | 6965.66 | 22.51 | 6965.61 | 31.31 | 6964.96 | 32.67 | 6964.86 | 32.7 | 6964.86 |
| 33.62 | 6964.63 | 52.46 | 6959.92 | 65.88 | 6959.92 | 78.42 | 6959.92 | 78.46 | 6959.92 |
| 78.51 | 6959.93 | 91.82 | 6963.23 | 95.78 | 6964.18 | 104.75 | 6966.39 | 106.04 | 6966.75 |
| 108.39 | 6967.37 | 113.64 | 6968.71 | 113.66 | 6968.71 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 32.7 | .04 | 95.78 | .045 | | |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 32.7 95.78 31.96 31.96 31.96 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5045.44

INPUT

Description:

Station Elevation Data num= 20

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6966.58 | 1 | 6966.29 | 16.5 | 6961.71 | 23.18 | 6961.88 | 32.89 | 6962.11 |
| 48.78 | 6962.08 | 65.99 | 6962.04 | 71.55 | 6960.65 | 74.91 | 6959.81 | 87.35 | 6959.81 |
| 90.19 | 6959.81 | 100.91 | 6959.81 | 108.83 | 6961.78 | 113.43 | 6962.94 | 120.31 | 6964.64 |
| 128.84 | 6966.8 | 129.52 | 6966.83 | 131.49 | 6966.94 | 135.79 | 6967.17 | 137.42 | 6967.26 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .045 | 16.5 | .04 | 108.83 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 16.5 108.83 32.44 32.44 32.44 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 5013

INPUT

Description:

Station Elevation Data num= 19

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6965.08 | 9.6 | 6963.68 | 26.04 | 6961.99 | 26.61 | 6961.93 | 34.14 | 6961.91 |
| 36.34 | 6961.83 | 41.42 | 6960.59 | 45.12 | 6959.69 | 56.11 | 6959.7 | 56.63 | 6959.7 |
| 64.81 | 6959.71 | 72 | 6959.72 | 76.17 | 6960.72 | 80.12 | 6961.68 | 85.97 | 6963.07 |
| 93.9 | 6964.95 | 94.44 | 6965.07 | 95.1 | 6965.2 | 95.22 | 6965.22 | | |

Manning's n Values num= 3

Phase 1

Sta n Val Sta n Val Sta n Val
 0 .045 36.34 .04 80.12 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 36.34 80.12 37.54 37.54 37.54 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4975.46

INPUT
 Description:

Station Elevation Data num= 22

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6966.08 | 38.49 | 6963.58 | 54 | 6961.82 | 54.36 | 6961.8 | 54.81 | 6961.69 |
| 63.38 | 6959.57 | 71.3 | 6959.57 | 74.14 | 6959.57 | 75.86 | 6959.57 | 80.43 | 6959.57 |
| 89.06 | 6959.58 | 89.61 | 6959.58 | 89.7 | 6959.6 | 89.83 | 6959.63 | 90.38 | 6959.77 |
| 99.95 | 6962.13 | 104.34 | 6963.22 | 111.19 | 6963.43 | 118.77 | 6963.24 | 121.11 | 6963.48 |
| 125.8 | 6963.63 | 150 | 6965.22 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 38.49 | .04 | 104.34 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 38.49 104.34 50.04 50.04 50.04 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4925.42

INPUT
 Description:

Station Elevation Data num= 15

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6965.1 | 4.49 | 6964.91 | 14.11 | 6964.28 | 28.72 | 6963.12 | 45.08 | 6961.83 |
| 66.68 | 6958.45 | 67.88 | 6958.26 | 72.91 | 6957.97 | 75.23 | 6957.84 | 81.59 | 6957.48 |

Phase 1

83.44 6957.78 105.7 6961.57 120.79 6962.71 134.68 6963.68 150 6964.1

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 45.08 .04 105.7 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 45.08 105.7 50.08 50.08 50.08 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4875.34

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6963.99 12.58 6963.53 20.95 6963.2 27.05 6962.33 36.46 6961.09
 59.75 6957.96 71.58 6956.48 75.25 6956.2 76.29 6956.13 77.28 6956.08
 80.6 6956.68 100.6 6959.86 126.33 6962.03 150 6963.76

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 20.95 .04 126.33 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 20.95 126.33 50.29 50.29 50.29 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4825.05

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6961.95 34.39 6959.99 54.42 6958.91 58.9 6957.85 72.94 6954.52

Phase 1

| | | | | | | | | | |
|--------|---------|--------|---------|--------|---------|-------|---------|-------|---------|
| 73.41 | 6954.5 | 76.05 | 6954.44 | 77.22 | 6954.55 | 88.32 | 6956.31 | 97.52 | 6957.97 |
| 111.09 | 6958.96 | 131.03 | 6960.59 | 146.87 | 6962.04 | 150 | 6962.13 | | |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 54.42 | .04 | 111.09 | .045 |

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 54.42 | 111.09 | | 49.96 | 49.96 | 49.96 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4775.09

INPUT

Description:

Station Elevation Data num= 12

| | | | | | | | | | |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev |
| 0 | 6961.31 | 9.2 | 6960.57 | 44.01 | 6958.08 | 59.83 | 6954.92 | 68.81 | 6953.23 |
| 73.95 | 6953.15 | 76.25 | 6953.12 | 79.12 | 6953.16 | 91.93 | 6955.91 | 95.94 | 6956.94 |
| 100.1 | 6956.93 | 150 | 6959.04 | | | | | | |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 44.01 | .04 | 95.94 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 44.01 | 95.94 | | 50.64 | 50.64 | 50.64 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4724.45

INPUT

Description:

Station Elevation Data num= 15

| | | | | | | | | | |
|-----|------|-----|------|-----|------|-----|------|-----|------|
| Sta | Elev |
|-----|------|-----|------|-----|------|-----|------|-----|------|

Phase 1

| | | | | | | | | | |
|-------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6959.3 | 35.51 | 6958.34 | 38.45 | 6958.32 | 40.25 | 6958.17 | 43.73 | 6957.56 |
| 72.32 | 6952.5 | 73.46 | 6952.3 | 75.36 | 6952.24 | 77.32 | 6952.32 | 89.26 | 6955.07 |
| 96.38 | 6956.45 | 105.11 | 6956.9 | 123.28 | 6956.85 | 137.41 | 6956.83 | 150 | 6957.54 |

Manning's n Values

| | | | |
|------|-------|-------|-------|
| num= | | 3 | |
| Sta | n Val | Sta | n Val |
| 0 | .045 | 40.25 | .04 |
| | | 96.38 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 40.25 | 96.38 | | 51.51 | 51.51 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4672.94

INPUT

Description:

| | | | | | | | | | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Station | | Elevation | | Data | | num= | | 18 | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6959.12 | 6.21 | 6958.93 | 26.86 | 6957.79 | 46.91 | 6956.53 | 55.57 | 6954.93 |
| 70.54 | 6952.06 | 72.9 | 6951.61 | 75.6 | 6951.58 | 77.45 | 6951.54 | 84.09 | 6952.97 |
| 93.45 | 6955.07 | 97.28 | 6955.56 | 135.4 | 6956.48 | 143.04 | 6956.78 | 144.21 | 6956.78 |
| 145.18 | 6956.78 | 147.21 | 6956.91 | 150 | 6957.05 | | | | |

Manning's n Values

| | | | |
|------|-------|-------|-------|
| num= | | 3 | |
| Sta | n Val | Sta | n Val |
| 0 | .045 | 46.91 | .04 |
| | | 97.28 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 46.91 | 97.28 | | 49.67 | 49.67 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4623.27

INPUT

Description:

Phase 1

| Station Elevation Data | | num= 22 | | Sta | | Elev | | Sta | | Elev | |
|------------------------|---------|---------|---------|--------|---------|--------|---------|--------|---------|------|--|
| 0 | 6956.44 | 5.23 | 6956.23 | 9.7 | 6956.05 | 11.8 | 6955.97 | 13.75 | 6955.88 | | |
| 15.98 | 6955.77 | 17.47 | 6955.75 | 19.19 | 6955.69 | 39.69 | 6954.03 | 39.7 | 6954.03 | | |
| 40.7 | 6953.88 | 57.45 | 6950.92 | 59.62 | 6950.54 | 62.99 | 6950.73 | 63.73 | 6950.75 | | |
| 68.59 | 6951.79 | 81.56 | 6954.29 | 100.82 | 6955.21 | 110.86 | 6955.88 | 117.25 | 6955.97 | | |
| 128.49 | 6956.29 | 136.54 | 6956.52 | | | | | | | | |

| Manning's n Values | | num= 3 | | Sta | | n Val | |
|--------------------|------|--------|-----|-------|------|-------|--|
| 0 | .045 | 39.7 | .04 | 81.56 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 39.7 | 81.56 | | 48.25 | 48.25 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4575.02

INPUT

Description:

| Station Elevation Data | | num= 18 | | Sta | | Elev | | Sta | | Elev | |
|------------------------|---------|---------|---------|--------|---------|-------|---------|-------|---------|------|--|
| 0 | 6956.26 | 1.83 | 6956.11 | 4.72 | 6955.85 | 11.44 | 6955.16 | 22.53 | 6954.54 | | |
| 39.04 | 6953.33 | 39.05 | 6953.33 | 60.56 | 6950.2 | 67.66 | 6949.26 | 68.1 | 6949.28 | | |
| 68.33 | 6949.29 | 71.51 | 6949.23 | 78.98 | 6950.86 | 88.89 | 6953.25 | 99.86 | 6954.11 | | |
| 104.06 | 6954.54 | 107.26 | 6954.49 | 144.24 | 6954.44 | | | | | | |

| Manning's n Values | | num= 3 | | Sta | | n Val | |
|--------------------|------|--------|-----|-------|------|-------|--|
| 0 | .045 | 39.05 | .04 | 88.89 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 39.05 | 88.89 | | 35.78 | 35.78 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

Phase 1

REACH: NCONFL-BGM RS: 4524.43

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 23 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| -19.62 | 6956.38 | -14.58 | 6955.15 | -7.44 | 6954.41 | -2.52 | 6953.9 | -1.17 | 6953.76 |
| -.55 | 6953.7 | .08 | 6953.58 | .51 | 6953.51 | .8 | 6953.45 | 1.01 | 6953.42 |
| 1.03 | 6953.41 | 4.59 | 6953.1 | 32.71 | 6950.05 | 45.89 | 6948.46 | 50.82 | 6948.09 |
| 52.9 | 6948.2 | 54.39 | 6948.55 | 68.43 | 6951.89 | 73.31 | 6953.09 | 77.76 | 6953.27 |
| 85.19 | 6953.66 | 96.43 | 6954.18 | 108.86 | 6954.27 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| -19.62 | .045 | 4.59 | .04 | 73.31 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 4.59 | 73.31 | | 63.64 | 63.64 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
REACH: NCONFL-BGM RS: 4475.61

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 12 | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 33.56 | 6958.43 | 46.11 | 6955.1 | 55.02 | 6952.74 | 69.08 | 6947.9 | 75.54 | 6947.96 |
| 76.98 | 6947.94 | 77.38 | 6948 | 83.71 | 6948.98 | 107.55 | 6952.53 | 110.42 | 6952.62 |
| 126.61 | 6953.03 | 127.51 | 6953.05 | | | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 33.56 | .045 | 46.11 | .04 | 107.55 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 46.11 | 107.55 | | 51.08 | 51.08 | | .1 | .3 |

CROSS SECTION

Phase 1

RIVER: UT_BSC2
 REACH: NCONFL-BGM

RS: 4424.53

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 16 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 32.4 | 6956.66 | 40.72 | 6954.27 | 44.76 | 6953.11 | 59.82 | 6949.04 | 67.84 | 6946.93 |
| 69.43 | 6946.6 | 73 | 6946.49 | 73.94 | 6946.47 | 76.07 | 6946.4 | 92.54 | 6950.97 |
| 95.79 | 6951.81 | 96.62 | 6952 | 96.83 | 6952.11 | 97.62 | 6952.03 | 126.53 | 6952.85 |
| 150 | 6952.58 | | | | | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 32.4 | .045 | 40.72 | .04 | 96.83 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 40.72 | 96.83 | | 50.02 | 50.02 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM

RS: 4374.51

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 15 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 28.44 | 6954.28 | 28.75 | 6954.24 | 30.7 | 6953.58 | 32.99 | 6952.89 | 39.34 | 6951.26 |
| 61.79 | 6945.49 | 66.88 | 6945 | 74.35 | 6945 | 85.85 | 6945 | 98.66 | 6947.84 |
| 116.08 | 6951.7 | 117.76 | 6952.07 | 118.42 | 6952.08 | 119.36 | 6952.07 | 150 | 6952.35 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 28.44 | .045 | 39.34 | .04 | 98.66 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 39.34 | 98.66 | | 58.66 | 58.66 | | .1 | .3 |

Phase 1

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4315.85

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 17 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 20.28 | 6951.56 | 26.7 | 6951.42 | 33.91 | 6949.65 | 37.33 | 6948.81 | 53.33 | 6944.89 |
| 55.87 | 6944.88 | 63.8 | 6944.88 | 65.95 | 6944.88 | 92.16 | 6944.86 | 92.5 | 6944.94 |
| 101.14 | 6947.05 | 118.32 | 6951.25 | 118.64 | 6951.32 | 120.8 | 6951.85 | 121.16 | 6951.86 |
| 129.93 | 6952.12 | 150 | 6951.75 | | | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|-------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 20.28 | .045 | 37.33 | .04 | 101.14 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 37.33 | 101.14 | | 54.22 | 54.22 | 54.22 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4261.63

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 16 | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 30.19 | 6949.01 | 34.7 | 6949.6 | 35.35 | 6949.44 | 37.1 | 6949 | 54.41 | 6944.7 |
| 66.07 | 6944.71 | 83.69 | 6944.71 | 92.5 | 6944.72 | 92.59 | 6944.72 | 94.11 | 6945.1 |
| 102.47 | 6947.18 | 112.24 | 6949.62 | 114.5 | 6950.18 | 118.65 | 6950.2 | 139.58 | 6950.43 |
| 150 | 6950.54 | | | | | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 30.19 | .045 | 37.1 | .04 | 102.47 | .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 37.1 102.47 14.74 14.74 14.74 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4246.89

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev |
|-------|---------|-------|---------|-------|---------|-------|---------|-------|---------|
| 4.95 | 6949.3 | 6.85 | 6948.82 | 23.48 | 6944.66 | 25 | 6944.66 | 37.92 | 6944.66 |
| 43.73 | 6944.66 | 43.86 | 6944.66 | 44 | 6944.66 | 59.6 | 6944.63 | 61.48 | 6944.62 |
| 61.58 | 6944.6 | 62.9 | 6944.92 | 80.14 | 6948.84 | 83.18 | 6949.48 | 86.23 | 6949.49 |
| 92.48 | 6949.49 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|------|-------|------|-------|-------|-------|
| 4.95 | .045 | 6.85 | .04 | 80.14 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 6.85 80.14 19.05 19.05 19.05 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4227.84

INPUT

Description:

Station Elevation Data num= 9

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|--------|---------|--------|---------|-------|---------|
| 7.14 | 6945.21 | 19.57 | 6941.59 | 27.33 | 6939.95 | 41.28 | 6939.96 | 44.13 | 6939.96 |
| 65.33 | 6939.96 | 73.42 | 6941.98 | 102.88 | 6949.35 | 105.23 | 6949.34 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-----|-------|-----|-------|
| | | | | | |

Phase 1

7.14 .045 7.14 .04 73.42 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 7.14 73.42 15.37 15.37 15.37 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4212.47

INPUT

Description:

Station Elevation Data num= 19

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|-------|---------|--------|---------|
| 15.6 | 6942.15 | 30.53 | 6942.05 | 31.61 | 6942.05 | 31.64 | 6942.05 | 31.77 | 6942.02 |
| 31.92 | 6942.04 | 32.46 | 6941.88 | 32.8 | 6941.77 | 40.17 | 6939.85 | 51.1 | 6937.01 |
| 68.22 | 6937.01 | 83.35 | 6937.01 | 89.1 | 6937.01 | 92.5 | 6937.91 | 125.68 | 6946.65 |
| 136.2 | 6949.29 | 138.26 | 6949.3 | 148.71 | 6949.28 | 150 | 6949.27 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|------|-------|-------|-------|--------|-------|
| 15.6 | .045 | 31.61 | .04 | 125.68 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 31.61 125.68 46.77 46.77 46.77 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4166.74

INPUT

Description:

Station Elevation Data num= 26

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 18.15 | 6943.53 | 26.49 | 6943.57 | 33.17 | 6943.61 | 36.8 | 6942.81 | 42.61 | 6941.52 |
| 59.15 | 6937.38 | 61.23 | 6936.87 | 66.82 | 6936.87 | 78.27 | 6936.87 | 92.51 | 6936.87 |
| 99.24 | 6936.87 | 100.86 | 6937.27 | 142.76 | 6947.75 | 142.91 | 6947.77 | 144.35 | 6948.38 |
| 144.49 | 6948.38 | 144.9 | 6948.39 | 145.32 | 6948.4 | 145.74 | 6948.4 | 146.16 | 6948.41 |

Phase 1

146.59 6948.41 147.02 6948.41 147.46 6948.42 147.9 6948.42 148.34 6948.42
 150.14 6948.44

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 18.15 .045 36.8 .04 142.76 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 36.8 142.76 13.78 13.78 13.78 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4151.92

INPUT

Description:

Station Elevation Data num= 20
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 1.58 6944.75 14 6941.83 19.81 6940.54 24.05 6939.48 34.7 6936.82
 36.79 6936.82 52.06 6936.82 64.48 6936.82 72.7 6936.82 83.34 6939.48
 92.5 6941.77 93.36 6941.98 94.72 6942.19 107.88 6947.78 109.2 6947.84
 113.01 6947.94 116.9 6947.97 120.86 6948 124.89 6948.04 126.86 6948.05

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 1.58 .045 14 .04 92.5 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 14 92.5 15.92 15.92 15.92 .3 .5

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4136

INPUT

Description:

Station Elevation Data num= 40

Phase 1

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6943.34 | 4.65 | 6943.76 | 7.68 | 6944.25 | 11.51 | 6944.35 | 20.53 | 6944.7 |
| 21.47 | 6944.74 | 21.69 | 6944.75 | 22.23 | 6944.62 | 41.22 | 6941.91 | 43.44 | 6941.94 |
| 54.33 | 6943.31 | 54.44 | 6943.77 | 54.47 | 6943.88 | 54.7 | 6943.92 | 55.6 | 6944.05 |
| 55.72 | 6937.44 | 55.74 | 6937.35 | 56.12 | 6937.26 | 58.03 | 6936.78 | 64.42 | 6936.78 |
| 66.8 | 6936.78 | 75.05 | 6936.78 | 96.03 | 6936.78 | 97.9 | 6937.25 | 98.31 | 6937.35 |
| 98.34 | 6937.44 | 98.46 | 6944.05 | 99.35 | 6943.92 | 99.59 | 6943.88 | 99.62 | 6943.77 |
| 99.73 | 6943.3 | 115.44 | 6942.42 | 126.76 | 6947.17 | 127.87 | 6947.22 | 131 | 6947.3 |
| 140.42 | 6947.38 | 143.55 | 6947.4 | 146.64 | 6947.43 | 149.68 | 6947.45 | 150 | 6947.45 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|------|-------|
| 0 | .045 | 56.12 | .013 | 97.9 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|--------|-------|--------|--------|
| | 56.12 | 97.9 | | 125.44 | 125.44 | | .3 | .5 |

CULVERT

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4073

INPUT

Description:

Distance from Upstream XS = 39.21
 Deck/Roadway Width = 47.87
 Weir Coefficient = 2.6

Upstream Deck/Roadway Coordinates

| num= 116 | | | | | | | | |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|
| Sta | Hi Cord | Lo Cord | Sta | Hi Cord | Lo Cord | Sta | Hi Cord | Lo Cord |
| -133.85 | 6948.14 | 0 | -130.68 | 6948.06 | 0 | -130.54 | 6948.05 | 0 |
| -130.4 | 6948.05 | 0 | -123.71 | 6947.88 | 0 | -123.55 | 6947.87 | 0 |
| -123.54 | 6947.87 | 0 | -123.14 | 6947.86 | 0 | -123.07 | 6947.86 | 0 |
| -120.28 | 6947.79 | 0 | -116.65 | 6947.7 | 0 | -116.55 | 6947.7 | 0 |
| -116.54 | 6947.7 | 0 | -115.88 | 6947.68 | 0 | -109.7 | 6947.53 | 0 |
| -109.56 | 6947.53 | 0 | -105.51 | 6947.44 | 0 | -105.42 | 6947.43 | 0 |
| -102.62 | 6947.37 | 0 | -102.56 | 6947.37 | 0 | -102.47 | 6947.37 | 0 |
| -98.56 | 6947.28 | 0 | -95.61 | 6947.22 | 0 | -95.56 | 6947.22 | 0 |
| -88.68 | 6947.07 | 0 | -88.56 | 6947.07 | 0 | -81.67 | 6946.93 | 0 |
| -81.55 | 6946.93 | 0 | -74.65 | 6946.8 | 0 | -74.55 | 6946.8 | 0 |

Phase 1

| | | | | | | | | |
|--------|---------|---|--------|---------|---|--------|---------|---|
| -73.57 | 6946.78 | 0 | -73.55 | 6946.78 | 0 | -67.63 | 6946.68 | 0 |
| -67.55 | 6946.68 | 0 | -60.63 | 6946.57 | 0 | -60.55 | 6946.56 | 0 |
| -53.61 | 6946.46 | 0 | -53.55 | 6946.46 | 0 | -53.51 | 6946.46 | 0 |
| -48.55 | 6946.39 | 0 | -46.57 | 6946.36 | 0 | -46.55 | 6946.36 | 0 |
| -39.59 | 6946.27 | 0 | -39.55 | 6946.27 | 0 | -32.57 | 6946.18 | 0 |
| -32.55 | 6946.18 | 0 | -25.56 | 6946.11 | 0 | -25.55 | 6946.11 | 0 |
| -23.55 | 6946.08 | 0 | -21.69 | 6946.07 | 0 | -18.56 | 6946.04 | 0 |
| -18.55 | 6946.04 | 0 | -11.55 | 6945.97 | 0 | -11.53 | 6945.97 | 0 |
| -4.55 | 6945.92 | 0 | -4.53 | 6945.92 | 0 | 1.45 | 6945.88 | 0 |
| 2.45 | 6945.87 | 0 | 2.49 | 6945.87 | 0 | 9.45 | 6945.83 | 0 |
| 9.5 | 6945.83 | 0 | 16.45 | 6945.8 | 0 | 16.52 | 6945.8 | 0 |
| 23.45 | 6945.77 | 0 | 23.48 | 6945.77 | 0 | 26.45 | 6945.76 | 0 |
| 30.39 | 6945.76 | 0 | 30.45 | 6945.76 | 0 | 30.54 | 6945.76 | 0 |
| 37.45 | 6945.75 | 0 | 41.66 | 6945.74 | 0 | 41.73 | 6945.74 | 0 |
| 41.78 | 6945.74 | 0 | 44.45 | 6945.74 | 0 | 44.57 | 6945.74 | 0 |
| 51.45 | 6945.75 | 0 | 51.58 | 6945.75 | 0 | 58.45 | 6945.76 | 0 |
| 58.6 | 6945.76 | 0 | 65.45 | 6945.79 | 0 | 65.61 | 6945.79 | 0 |
| 72.45 | 6945.81 | 0 | 72.55 | 6945.82 | 0 | 76.45 | 6945.83 | 0 |
| 79.37 | 6945.85 | 0 | 79.45 | 6945.85 | 0 | 79.64 | 6945.85 | 0 |
| 81.02 | 6945.86 | 0 | 86.45 | 6945.9 | 0 | 86.64 | 6945.9 | 0 |
| 93.45 | 6945.95 | 0 | 93.64 | 6945.95 | 0 | 100.45 | 6946.01 | 0 |
| 100.47 | 6946.01 | 0 | 101.45 | 6946.02 | 0 | 101.55 | 6946.02 | 0 |
| 105.26 | 6946.06 | 0 | 105.82 | 6946.06 | 0 | 126.45 | 6946.27 | 0 |
| 127.09 | 6946.27 | 0 | 151.45 | 6946.51 | 0 | 152.06 | 6946.52 | 0 |
| 176.45 | 6946.76 | 0 | 177.04 | 6946.77 | 0 | 201.45 | 6947.01 | 0 |
| 202.02 | 6947.02 | 0 | 213.4 | 6947.13 | 0 | 226.45 | 6947.26 | 0 |
| 226.99 | 6947.27 | 0 | 251.45 | 6947.51 | 0 | 251.95 | 6947.51 | 0 |
| 276.45 | 6947.76 | 0 | 276.9 | 6947.76 | 0 | 301.45 | 6948.01 | 0 |
| 301.86 | 6948.01 | 0 | 309.04 | 6948.08 | 0 | | | |

Upstream Bridge Cross Section Data

| Station Elevation Data num= 40 | | | | | | | | | |
|--------------------------------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6943.34 | 4.65 | 6943.76 | 7.68 | 6944.25 | 11.51 | 6944.35 | 20.53 | 6944.7 |
| 21.47 | 6944.74 | 21.69 | 6944.75 | 22.23 | 6944.62 | 41.22 | 6941.91 | 43.44 | 6941.94 |
| 54.33 | 6943.31 | 54.44 | 6943.77 | 54.47 | 6943.88 | 54.7 | 6943.92 | 55.6 | 6944.05 |
| 55.72 | 6937.44 | 55.74 | 6937.35 | 56.12 | 6937.26 | 58.03 | 6936.78 | 64.42 | 6936.78 |
| 66.8 | 6936.78 | 75.05 | 6936.78 | 96.03 | 6936.78 | 97.9 | 6937.25 | 98.31 | 6937.35 |
| 98.34 | 6937.44 | 98.46 | 6944.05 | 99.35 | 6943.92 | 99.59 | 6943.88 | 99.62 | 6943.77 |
| 99.73 | 6943.3 | 115.44 | 6942.42 | 126.76 | 6947.17 | 127.87 | 6947.22 | 131 | 6947.3 |
| 140.42 | 6947.38 | 143.55 | 6947.4 | 146.64 | 6947.43 | 149.68 | 6947.45 | 150 | 6947.45 |

Phase 1

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 56.12 .013 97.9 .045

Bank Sta: Left Right Coeff Contr. Expan.
 56.12 97.9 .3 .5

Downstream Deck/Roadway Coordinates

| num= 116 | | Coordinates | | | |
|----------|---------|-------------|---------|---------|---------|
| Sta | Hi Cord | Lo Cord | Sta | Hi Cord | Lo Cord |
| -134.4 | 6948.14 | 0 | -131.23 | 6948.06 | 0 |
| -130.95 | 6948.05 | 0 | -124.26 | 6947.88 | 0 |
| -124.09 | 6947.87 | 0 | -123.69 | 6947.86 | 0 |
| -120.83 | 6947.79 | 0 | -117.2 | 6947.7 | 0 |
| -117.09 | 6947.7 | 0 | -116.43 | 6947.68 | 0 |
| -110.11 | 6947.53 | 0 | -106.06 | 6947.44 | 0 |
| -103.17 | 6947.37 | 0 | -103.11 | 6947.37 | 0 |
| -99.11 | 6947.28 | 0 | -96.16 | 6947.22 | 0 |
| -89.23 | 6947.07 | 0 | -89.11 | 6947.07 | 0 |
| -82.1 | 6946.93 | 0 | -75.2 | 6946.8 | 0 |
| -74.12 | 6946.78 | 0 | -74.1 | 6946.78 | 0 |
| -68.1 | 6946.68 | 0 | -61.18 | 6946.57 | 0 |
| -54.16 | 6946.46 | 0 | -54.1 | 6946.46 | 0 |
| -49.1 | 6946.39 | 0 | -47.12 | 6946.36 | 0 |
| -40.14 | 6946.27 | 0 | -40.1 | 6946.27 | 0 |
| -33.1 | 6946.18 | 0 | -26.11 | 6946.11 | 0 |
| -24.1 | 6946.08 | 0 | -22.24 | 6946.07 | 0 |
| -19.1 | 6946.04 | 0 | -12.1 | 6945.97 | 0 |
| -5.1 | 6945.92 | 0 | -5.08 | 6945.92 | 0 |
| 1.9 | 6945.87 | 0 | 1.94 | 6945.87 | 0 |
| 8.95 | 6945.83 | 0 | 15.9 | 6945.8 | 0 |
| 22.9 | 6945.77 | 0 | 22.93 | 6945.77 | 0 |
| 29.84 | 6945.76 | 0 | 29.9 | 6945.76 | 0 |
| 36.9 | 6945.75 | 0 | 41.11 | 6945.74 | 0 |
| 41.23 | 6945.74 | 0 | 43.9 | 6945.74 | 0 |
| 50.9 | 6945.75 | 0 | 51.03 | 6945.75 | 0 |
| 58.05 | 6945.76 | 0 | 64.9 | 6945.79 | 0 |
| 71.9 | 6945.81 | 0 | 72 | 6945.82 | 0 |
| 78.82 | 6945.85 | 0 | 78.9 | 6945.85 | 0 |
| 80.47 | 6945.86 | 0 | 85.9 | 6945.9 | 0 |

Phase 1

| | | | | | | | | |
|--------|---------|---|--------|---------|---|--------|---------|---|
| 92.9 | 6945.95 | 0 | 93.09 | 6945.95 | 0 | 99.9 | 6946.01 | 0 |
| 99.92 | 6946.01 | 0 | 100.9 | 6946.02 | 0 | 101 | 6946.02 | 0 |
| 104.71 | 6946.06 | 0 | 105.27 | 6946.06 | 0 | 125.9 | 6946.27 | 0 |
| 126.54 | 6946.27 | 0 | 150.9 | 6946.51 | 0 | 151.51 | 6946.52 | 0 |
| 175.9 | 6946.76 | 0 | 176.49 | 6946.77 | 0 | 200.9 | 6947.01 | 0 |
| 201.47 | 6947.02 | 0 | 212.85 | 6947.13 | 0 | 225.9 | 6947.26 | 0 |
| 226.44 | 6947.27 | 0 | 250.9 | 6947.51 | 0 | 251.4 | 6947.51 | 0 |
| 275.9 | 6947.76 | 0 | 276.35 | 6947.76 | 0 | 300.9 | 6948.01 | 0 |
| 301.31 | 6948.01 | 0 | 308.49 | 6948.08 | 0 | | | |

Downstream Bridge Cross Section Data

Station Elevation Data num= 46

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6945.08 | 1.53 | 6945.06 | 2.48 | 6944.97 | 7.41 | 6944.75 | 7.51 | 6944.75 |
| 12.38 | 6944.53 | 12.48 | 6944.52 | 12.61 | 6944.51 | 17.31 | 6944.29 | 21.85 | 6944.13 |
| 26.23 | 6943.62 | 29.4 | 6943.25 | 31.77 | 6942.61 | 33.63 | 6942.27 | 53.17 | 6942.94 |
| 53.28 | 6943.41 | 53.31 | 6943.51 | 53.54 | 6943.55 | 54.44 | 6943.69 | 54.56 | 6937.03 |
| 54.58 | 6936.94 | 54.94 | 6936.85 | 56.79 | 6936.4 | 58.88 | 6936.4 | 74.51 | 6936.4 |
| 75.79 | 6936.4 | 78.86 | 6936.4 | 94.79 | 6936.4 | 96.62 | 6936.85 | 96.98 | 6936.94 |
| 97 | 6937.03 | 97.12 | 6943.7 | 97.32 | 6943.66 | 98.25 | 6943.52 | 98.28 | 6943.41 |
| 98.4 | 6942.94 | 122.18 | 6943.21 | 124.52 | 6943.84 | 125.96 | 6943.87 | 127.43 | 6943.87 |
| 129.25 | 6943.86 | 135.98 | 6944.11 | 140.37 | 6944.08 | 143.66 | 6944.1 | 147.99 | 6944.08 |
| 150 | 6944.06 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .045 | 54.94 | .04 | 96.62 | .045 |

| Bank Sta: | Left | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|-------|--------|--------|
| | 54.94 | 96.62 | .3 | | .5 |

Upstream Embankment side slope = 3 horiz. to 1.0 vertical
 Downstream Embankment side slope = 3 horiz. to 1.0 vertical
 Maximum allowable submergence for weir flow = .98
 Elevation at which weir flow begins =
 Energy head used in spillway design =
 Spillway height used in design =
 Weir crest shape = Broad Crested

Number of Culverts = 1

Phase 1

Culvert Name Shape Rise Span
 Culvert #1 Box 6 16

FHWA Chart # 8 - flared wingwalls
 FHWA Scale # 1 - Wingwall flared 30 to 75 deg.

Solution Criteria = Highest U. S. EG

| | | | | | | |
|---------------------|--------|-------|----------|---------------|--------------------|----------------|
| Culvert Upstrm Dist | Length | Top n | Bottom n | Depth Blocked | Entrance Loss Coef | Exit Loss Coef |
| 1 | 120 | .011 | .011 | 0 | .5 | 1 |

Number of Barrels = 2

Upstream Elevation = 6937.5

Centerline Stations

| | |
|------|------|
| Sta. | Sta. |
| 67 | 85.5 |

Downstream Elevation = 6936.5

Centerline Stations

| | |
|------|------|
| Sta. | Sta. |
| 67 | 85.5 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM

RS: 4010.56

INPUT

Description:

| | | |
|---|------|----|
| Station Elevation Data | num= | 46 |
| Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev | | |
| 0 6945.08 1.53 6945.06 2.48 6944.97 7.41 6944.75 7.51 6944.75 | | |
| 12.38 6944.53 12.48 6944.52 12.61 6944.51 17.31 6944.29 21.85 6944.13 | | |
| 26.23 6943.62 29.4 6943.25 31.77 6942.61 33.63 6942.27 53.17 6942.94 | | |
| 53.28 6943.41 53.31 6943.51 53.54 6943.55 54.44 6943.69 54.56 6937.03 | | |
| 54.58 6936.94 54.94 6936.85 56.79 6936.4 58.88 6936.4 74.51 6936.4 | | |
| 75.79 6936.4 78.86 6936.4 94.79 6936.4 96.62 6936.85 96.98 6936.94 | | |
| 97 6937.03 97.12 6943.7 97.32 6943.66 98.25 6943.52 98.28 6943.41 | | |
| 98.4 6942.94 122.18 6943.21 124.52 6943.84 125.96 6943.87 127.43 6943.87 | | |
| 129.25 6943.86 135.98 6944.11 140.37 6944.08 143.66 6944.1 147.99 6944.08 | | |
| 150 6944.06 | | |

Manning's n Values

num= 3

| |
|--|
| Sta n Val Sta n Val Sta n Val |
| 0 .045 54.94 .04 96.62 .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 54.94 96.62 8.99 8.99 8.99 .3 .5

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 4001.57

INPUT

Description:

Station Elevation Data num= 46

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6945.21 | 3.74 | 6945.15 | 11.79 | 6944.39 | 13.92 | 6944.3 | 14.57 | 6944.27 |
| 17.27 | 6944.15 | 17.81 | 6944.09 | 18.55 | 6944.01 | 20.88 | 6943.9 | 23.14 | 6943.83 |
| 25.31 | 6943.57 | 26.89 | 6943.39 | 38.91 | 6940.17 | 39.21 | 6940.11 | 42.35 | 6940.22 |
| 42.37 | 6940.3 | 42.49 | 6940.73 | 43.44 | 6940.88 | 43.63 | 6940.91 | 43.65 | 6939.56 |
| 43.77 | 6939.11 | 44.02 | 6939.05 | 54.92 | 6936.38 | 65.53 | 6936.38 | 72.11 | 6936.38 |
| 73.92 | 6936.38 | 89.52 | 6936.38 | 92.92 | 6936.38 | 103.83 | 6939.05 | 104.07 | 6939.11 |
| 104.19 | 6939.55 | 104.21 | 6940.91 | 105.19 | 6940.76 | 105.35 | 6940.74 | 105.47 | 6940.3 |
| 105.49 | 6940.22 | 109.33 | 6940.27 | 121.26 | 6943.46 | 124.17 | 6943.53 | 126.92 | 6943.52 |
| 130.05 | 6943.5 | 133.09 | 6943.49 | 136.04 | 6943.48 | 138.91 | 6943.46 | 141.7 | 6943.45 |
| 150 | 6943.42 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 44.02 | .04 | 103.83 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 44.02 103.83 30.39 30.39 30.39 .3 .5

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3971.12

INPUT

Description:

Station Elevation Data num= 20

Phase 1

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6944.52 | 8.95 | 6944.09 | 17.21 | 6943.79 | 18.4 | 6943.71 | 18.96 | 6943.67 |
| 23.19 | 6943.34 | 35.37 | 6940.3 | 42.21 | 6938.59 | 51.48 | 6936.28 | 60.36 | 6936.28 |
| 70.95 | 6936.29 | 71.49 | 6936.29 | 84.17 | 6936.29 | 89.59 | 6936.29 | 101.56 | 6939.28 |
| 110.82 | 6941.59 | 115.8 | 6942.83 | 117.79 | 6942.83 | 125.91 | 6942.79 | 150 | 6942.86 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 35.37 | .04 | 110.82 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|------|------|------|----|----|
| 35.37 | 110.82 | 36.9 | 36.9 | 36.9 | .1 | .3 |
|-------|--------|------|------|------|----|----|

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3934.28

INPUT

Description:

Station Elevation Data num= 29

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6943.74 | 19.5 | 6943 | 21.78 | 6942.81 | 23.61 | 6942.59 | 25.44 | 6942.5 |
| 25.67 | 6942.48 | 26.29 | 6942.45 | 27.77 | 6942.38 | 33.52 | 6942.08 | 40.37 | 6941.65 |
| 49.63 | 6939.36 | 50.22 | 6939.21 | 62.45 | 6936.17 | 72.81 | 6936.17 | 81.8 | 6936.17 |
| 84.93 | 6936.17 | 87.92 | 6936.18 | 95 | 6936.18 | 100.74 | 6936.18 | 109.14 | 6938.26 |
| 111.53 | 6938.84 | 117.56 | 6940.35 | 119.3 | 6940.78 | 122.37 | 6941.11 | 128.43 | 6941.78 |
| 130.03 | 6941.95 | 130.99 | 6942 | 133.11 | 6942.09 | 150 | 6942.35 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 49.63 | .04 | 117.56 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|-------|-------|-------|----|----|
| 49.63 | 117.56 | 50.78 | 50.78 | 50.78 | .1 | .3 |
|-------|--------|-------|-------|-------|----|----|

CROSS SECTION

RIVER: UT_BSC2

Phase 1

REACH: NCONFL-BGM

RS: 3883.5

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 33 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6943.2 | 2.46 | 6943.22 | 33.41 | 6939.86 | 35.37 | 6939.67 | 36.6 | 6939.52 |
| 39.71 | 6939.33 | 45.47 | 6939.13 | 52.98 | 6938.93 | 58.14 | 6937.65 | 64.68 | 6936.04 |
| 71.55 | 6936.03 | 73.66 | 6936.03 | 79.41 | 6936.03 | 80.98 | 6936.03 | 83.75 | 6936.03 |
| 87.1 | 6936.03 | 90.85 | 6936.03 | 92.74 | 6936.02 | 103.06 | 6936.02 | 105.91 | 6936.73 |
| 107.03 | 6937.01 | 109.59 | 6937.64 | 112.81 | 6937.65 | 113.66 | 6937.66 | 114.33 | 6937.66 |
| 129.2 | 6937.61 | 148.46 | 6937.5 | 151.59 | 6937.21 | 153.38 | 6937.13 | 156.56 | 6937.91 |
| 171.58 | 6942.04 | 176.24 | 6942.19 | 190.37 | 6942.59 | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|-------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 52.98 | .04 | 156.56 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 52.98 | 156.56 | | 50.3 | 50.3 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM

RS: 3833.2

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 28 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6942.16 | 3.34 | 6941.79 | 16.12 | 6941.2 | 44.4 | 6939.51 | 45.87 | 6939.43 |
| 46.22 | 6939.41 | 47.38 | 6939.35 | 48.21 | 6939.3 | 56.35 | 6937.27 | 61.02 | 6936.11 |
| 61.91 | 6935.89 | 75.41 | 6935.88 | 79.35 | 6935.88 | 79.69 | 6935.88 | 80.96 | 6935.88 |
| 82.4 | 6935.88 | 82.99 | 6935.88 | 90.23 | 6935.88 | 100.05 | 6935.88 | 104.3 | 6936.94 |
| 105.69 | 6937.29 | 105.87 | 6937.35 | 108.18 | 6937.39 | 123.96 | 6937.2 | 133.88 | 6935.31 |
| 149.05 | 6939.25 | 156.89 | 6941.24 | 161.79 | 6941.36 | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|-------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 48.21 | .04 | 149.05 | .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 48.21 149.05 50.43 50.43 50.43 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3782.77

INPUT

Description:

Station Elevation Data num= 26

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|-------|---------|--------|---------|-------|---------|-------|---------|
| 0 | 6940.08 | 23.83 | 6938.59 | 26.75 | 6938.1 | 27.41 | 6938.02 | 31.79 | 6937.43 |
| 34.91 | 6936.64 | 39.02 | 6935.9 | 41.7 | 6935.42 | 43.32 | 6935.41 | 58.12 | 6935 |
| 58.22 | 6934.99 | 63.76 | 6934.44 | 64.69 | 6934.35 | 66.28 | 6934.68 | 67.06 | 6935 |
| 71.73 | 6935.38 | 75.33 | 6935.53 | 83.44 | 6937.16 | 88.43 | 6937.54 | 90.78 | 6938.12 |
| 90.82 | 6938.12 | 93.1 | 6937.56 | 107.51 | 6934.66 | 127 | 6938.71 | 132.8 | 6939.83 |
| 140 | 6940.13 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .045 | 23.83 | .04 | 132.8 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 23.83 132.8 49.78 49.78 49.78 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3732.99

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6939.47 | 22.93 | 6938.4 | 39.82 | 6937.64 | 64.36 | 6934.46 | 73.16 | 6933.26 |
| 73.77 | 6933.18 | 76.31 | 6933.49 | 86.66 | 6934.62 | 92.06 | 6934.61 | 95.12 | 6934.69 |
| 103.76 | 6934.62 | 132.38 | 6934.34 | 155.38 | 6938.15 | 162.61 | 6939.21 | 169.1 | 6939.38 |

Phase 1

170.59 6939.42

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 22.93 .04 162.61 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 22.93 162.61 50.16 50.16 50.16 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3682.83

INPUT

Description:

Station Elevation Data num= 16
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6938.96 13.37 6938.69 28.67 6938.2 70.27 6932.3 72.56 6931.94
 72.8 6931.9 74.04 6932.1 88.79 6933.84 92.58 6934.15 96.39 6934.03
 121.74 6933.67 137.6 6933.46 148.44 6933.23 164.2 6936.02 181.52 6938.72
 185.99 6938.82

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 28.67 .04 181.52 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 28.67 181.52 51.33 51.33 51.33 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3631.5

INPUT

Description:

Station Elevation Data num= 15
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev

Phase 1

| | | | | | | | | | |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6938.16 | 15.4 | 6937.92 | 21.77 | 6937.78 | 43.82 | 6934.93 | 72.63 | 6931.2 |
| 72.68 | 6931.2 | 76.28 | 6931.74 | 89.29 | 6933.63 | 104.89 | 6934.34 | 113.84 | 6934.54 |
| 126.98 | 6934.36 | 154.1 | 6932.43 | 160.15 | 6933.47 | 184.83 | 6938.29 | 190.1 | 6938.48 |

Manning's n Values num= 3

| Station | Value | Station | Value | Station | Value |
|---------|-------|---------|-------|---------|-------|
| 0 | .045 | 21.77 | .04 | 184.83 | .045 |

| Bank | Sta: Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|------|-----------|--------|----------|--------------|-------|-------|--------|--------|
| | 21.77 | 184.83 | | 48.71 | 48.71 | 48.71 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3582.8

INPUT

Description:

Station Elevation Data num= 17

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6937.62 | 3.4 | 6937.62 | 12.79 | 6937.38 | 31.35 | 6936.43 | 41.1 | 6935.11 |
| 72.3 | 6930.64 | 72.71 | 6930.58 | 85.12 | 6931.53 | 99.12 | 6932.37 | 109.14 | 6933.33 |
| 125.17 | 6934.55 | 145.22 | 6931.88 | 153.89 | 6930.85 | 173.12 | 6935.35 | 181.06 | 6937.1 |
| 185.24 | 6937.26 | 194.98 | 6937.42 | | | | | | |

Manning's n Values num= 3

| Station | Value | Station | Value | Station | Value |
|---------|-------|---------|-------|---------|-------|
| 0 | .045 | 0 | .04 | 181.06 | .045 |

| Bank | Sta: Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|------|-----------|--------|----------|--------------|-------|-------|--------|--------|
| | 0 | 181.06 | | 50.14 | 50.14 | 50.14 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3532.66

INPUT

Description:

Phase 1

Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6935.9 | 5.33 | 6935.73 | 37.55 | 6934.96 | 49.84 | 6933.13 | 73.26 | 6929.49 |
| 73.68 | 6929.51 | 95.34 | 6930.85 | 104.54 | 6931.6 | 109.72 | 6931.57 | 122.26 | 6931.76 |
| 135.86 | 6930.75 | 147.9 | 6929.91 | 163.85 | 6933.22 | 175.35 | 6935.76 | 179.76 | 6935.87 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 37.55 | .04 | 175.35 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|-------|-------|-------|----|----|
| 37.55 | 175.35 | 50.09 | 50.09 | 50.09 | .1 | .3 |
|-------|--------|-------|-------|-------|----|----|

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3482.57

INPUT
 Description:

Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 0 | 6935.09 | 15.01 | 6935.25 | 28.58 | 6934.15 | 35.27 | 6933.7 | 49.03 | 6931.78 |
| 74.87 | 6928.8 | 75.13 | 6928.82 | 88.97 | 6930.15 | 92.89 | 6930.24 | 97.98 | 6929.93 |
| 111.92 | 6929.62 | 120.37 | 6928.86 | 136.63 | 6932.23 | 146.26 | 6934.93 | 150 | 6934.42 |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 15.01 | .04 | 146.26 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|------|------|------|----|----|
| 15.01 | 146.26 | 50.1 | 50.1 | 50.1 | .1 | .3 |
|-------|--------|------|------|------|----|----|

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3432.47

INPUT

Phase 1

Description:

| Station | | Elevation | | Data | | num= | | 15 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6934.04 | 12.09 | 6933.79 | 12.83 | 6933.78 | 16.91 | 6933.02 | 34.95 | 6931.31 |
| 65.27 | 6928.75 | 75.11 | 6928.49 | 78.87 | 6928.39 | 88.93 | 6927.99 | 98.97 | 6930.78 |
| 107.19 | 6932.75 | 109.55 | 6932.86 | 114.68 | 6933.1 | 140.81 | 6933.36 | 150 | 6933.46 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 12.09 | .04 | 109.55 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 12.09 | 109.55 | | 49.93 | 49.93 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3382.53

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 12 | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6933.24 | 17.69 | 6932.69 | 60.53 | 6928.38 | 63.35 | 6928.09 | 63.87 | 6928.07 |
| 72.11 | 6927.78 | 80.87 | 6927.47 | 86.02 | 6928.04 | 105.87 | 6929.71 | 122.83 | 6930.24 |
| 177.44 | 6932.03 | 180.28 | 6932.01 | | | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 17.69 | .04 | 177.44 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 17.69 | 177.44 | | 50.18 | 50.18 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 3332.36

Phase 1

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 15 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6932.77 | 3.8 | 6932.72 | 5.77 | 6932.69 | 7.36 | 6932.6 | 35.04 | 6931.32 |
| 58.71 | 6927.57 | 67.53 | 6926.42 | 69.95 | 6926.44 | 73.15 | 6926.54 | 81.57 | 6926.79 |
| 98.39 | 6928.03 | 119.22 | 6929.56 | 143.64 | 6930.24 | 162.24 | 6930.68 | 169.23 | 6930.91 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 35.04 | .04 | 162.24 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 35.04 | 162.24 | | 50.21 | 50.21 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 3282.15

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 15 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6931.17 | 1.46 | 6931.16 | 44.98 | 6930.18 | 48.76 | 6929.8 | 64.02 | 6925.77 |
| 69.23 | 6924.78 | 72.51 | 6924.96 | 73.78 | 6925.03 | 84.98 | 6925.91 | 105.49 | 6927.36 |
| 128.8 | 6929.31 | 141.49 | 6929.55 | 185.07 | 6931.08 | 185.49 | 6931.08 | 192 | 6931.06 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 44.98 | .04 | 128.8 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 44.98 | 128.8 | | 49.89 | 49.89 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 3232.26

Phase 1

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 15 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6929.55 | 4.97 | 6929.53 | 22.77 | 6929.02 | 50.59 | 6928.45 | 55.37 | 6927.16 |
| 70.4 | 6923.75 | 74.08 | 6924.06 | 77.53 | 6924.34 | 81.44 | 6924.74 | 88.07 | 6925.55 |
| 122.82 | 6929.1 | 123.27 | 6929.11 | 155.02 | 6929.73 | 171.66 | 6930.38 | 173.05 | 6930.4 |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 50.59 | .04 | 122.82 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 50.59 | 122.82 | | 50.17 | 50.17 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 3182.09

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 14 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6928.69 | 16.79 | 6928.61 | 37.89 | 6927.96 | 47.88 | 6927.46 | 61.58 | 6925.2 |
| 70.66 | 6923.44 | 75.17 | 6923.29 | 75.47 | 6923.28 | 79.54 | 6923.32 | 108.39 | 6927.73 |
| 109.33 | 6927.91 | 114.48 | 6928.1 | 140.39 | 6929.05 | 150 | 6929.31 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 47.88 | .04 | 109.33 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 47.88 | 109.33 | | 50.08 | 50.08 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

Phase 1

REACH: NCONFL-BGM

RS: 3132.01

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6927.49 | 22.24 | 6926.88 | 45.77 | 6926.19 | 52.94 | 6924.92 | 62.61 | 6923.15 |
| 75.17 | 6923.39 | 82.58 | 6923.53 | 93.8 | 6923.61 | 101.67 | 6925.21 | 106.55 | 6926.24 |
| 133.38 | 6928.12 | 144.02 | 6928.52 | 150 | 6928.6 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 45.77 | .04 | 106.55 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 45.77 | 106.55 | | 49.96 | 49.96 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM

RS: 3082.04

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 18 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6928.05 | 38.05 | 6927.43 | 43.4 | 6927.16 | 93.94 | 6925.45 | 95.21 | 6925.41 |
| 96.15 | 6925.26 | 113.08 | 6921.99 | 125.32 | 6922.51 | 127.87 | 6922.54 | 149.07 | 6922.79 |
| 160.41 | 6924.83 | 162.73 | 6925.31 | 174.68 | 6926.23 | 189.47 | 6927.42 | 191.56 | 6927.56 |
| 191.58 | 6927.56 | 193.94 | 6927.59 | 200.66 | 6927.61 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 95.21 | .04 | 162.73 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 95.21 | 162.73 | | 49.96 | 49.96 | | .1 | .3 |

CROSS SECTION

Phase 1

RIVER: UT_BSC2
 REACH: NCONFL-BGM

RS: 3032.09

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 28 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6926.97 | 18.49 | 6926.3 | 35.86 | 6925.36 | 45.94 | 6924.76 | 61.9 | 6921.9 |
| 62.95 | 6921.72 | 64.44 | 6921.71 | 66.81 | 6921.7 | 72.27 | 6921.68 | 99.45 | 6921.56 |
| 103.57 | 6922.18 | 107.6 | 6922.78 | 107.9 | 6922.83 | 117.14 | 6921.62 | 117.24 | 6921.6 |
| 117.26 | 6921.6 | 117.35 | 6921.59 | 117.52 | 6921.57 | 117.53 | 6921.57 | 123.18 | 6921.62 |
| 123.5 | 6921.62 | 123.85 | 6921.63 | 129.48 | 6921.68 | 129.73 | 6921.72 | 136.89 | 6922.78 |
| 157.71 | 6925.89 | 165.78 | 6925.81 | 175.4 | 6925.61 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 45.94 | .04 | 157.71 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 45.94 | 157.71 | | 50.18 | 50.18 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM

RS: 2981.9

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 18 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6926.94 | 10.46 | 6926.75 | 12.07 | 6926.58 | 28.76 | 6924.81 | 44.56 | 6923.42 |
| 67.71 | 6920.99 | 68.71 | 6920.85 | 69.2 | 6920.84 | 72.75 | 6920.77 | 82.31 | 6920.57 |
| 91.26 | 6922.59 | 98.84 | 6924.17 | 99.59 | 6924.18 | 100.45 | 6924.2 | 133.18 | 6924.77 |
| 138.48 | 6924.85 | 170.65 | 6925.36 | 171.52 | 6925.35 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 12.07 | .04 | 100.45 | .045 | | |

Phase 1

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 12.07 | 100.45 | | 50.27 50.27 | 50.27 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2931.64

INPUT

Description:

| | | | | | | | | | |
|---------|-----------|-------|---------|-------|---------|--------|---------|--------|---------|
| Station | Elevation | Data | num= | 16 | | | | | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6926.1 | 18.13 | 6925.81 | 19.68 | 6925.79 | 20.08 | 6925.76 | 21.08 | 6925.7 |
| 40.93 | 6924.34 | 62.31 | 6920.25 | 64.23 | 6919.84 | 65.4 | 6919.86 | 72.78 | 6919.94 |
| 79.78 | 6920.01 | 89.4 | 6921.77 | 95.22 | 6922.65 | 166.18 | 6924.46 | 175.43 | 6924.7 |
| 179.51 | 6924.79 | | | | | | | | |

| | | | | | |
|-------------|--------|-------|-------|-------|-------|
| Manning's n | Values | num= | 3 | | |
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 40.93 | .04 | 95.22 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 40.93 | 95.22 | | 50.22 50.22 | 50.22 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2881.41

INPUT

Description:

| | | | | | | | | | |
|---------|-----------|-------|---------|--------|---------|--------|---------|-------|---------|
| Station | Elevation | Data | num= | 14 | | | | | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6925.24 | 20.3 | 6924.92 | 22.17 | 6924.89 | 24.13 | 6924.76 | 41.82 | 6923.67 |
| 59.09 | 6919.82 | 61.33 | 6919.34 | 64.69 | 6919.34 | 72.92 | 6919.33 | 82.61 | 6919.31 |
| 94.28 | 6920.95 | 99 | 6921.46 | 183.37 | 6923.45 | 185.87 | 6923.51 | | |

| | | | | | |
|-------------|--------|------|-------|-----|-------|
| Manning's n | Values | num= | 3 | | |
| Sta | n Val | Sta | n Val | Sta | n Val |

Phase 1

0 .045 41.82 .04 99 .045

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 41.82 | 99 | | 49.87 49.87 | 49.87 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 2831.54

INPUT

Description:

| | | | | | | | | | |
|---------|-----------|--------|---------|--------|---------|--------|---------|-------|---------|
| Station | Elevation | Data | num= | 14 | | | | | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6923.75 | 14.01 | 6923.53 | 32.65 | 6922.77 | 47.73 | 6922.24 | 62.37 | 6918.47 |
| 64.37 | 6917.96 | 70.64 | 6918.05 | 72.66 | 6918.07 | 78.56 | 6918.13 | 84.89 | 6918.97 |
| 98.45 | 6920.68 | 118.89 | 6921.29 | 188.61 | 6923.26 | 189.28 | 6923.26 | | |

| | | | |
|-------------|--------|--------|-------|
| Manning's n | Values | num= | 3 |
| Sta | n Val | Sta | n Val |
| 0 | .045 | 14.01 | .04 |
| | | 118.89 | .045 |

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 14.01 | 118.89 | | 50.1 50.1 | 50.1 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 2781.44

INPUT

Description:

| | | | | | | | | | |
|---------|-----------|--------|---------|-------|---------|-------|---------|-------|---------|
| Station | Elevation | Data | num= | 13 | | | | | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6922.59 | 10.49 | 6922.35 | 37.01 | 6921.12 | 54.97 | 6920.34 | 63.84 | 6917.94 |
| 66.89 | 6917.16 | 75.17 | 6917.29 | 81.41 | 6917.39 | 81.5 | 6917.39 | 81.68 | 6917.42 |
| 98.3 | 6920.39 | 144.82 | 6921.51 | 150 | 6921.62 | | | | |

| | | | |
|-------------|--------|------|---|
| Manning's n | Values | num= | 3 |
|-------------|--------|------|---|

Phase 1

Sta n Val Sta n Val Sta n Val
 0 .045 54.97 .04 98.3 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 54.97 98.3 50.07 50.07 50.07 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2731.38

INPUT

Description:

Station Elevation Data num= 15

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6921.06 | 2.97 | 6920.98 | 26.95 | 6919.62 | 44.36 | 6918.77 | 56.14 | 6917.17 |
| 59.76 | 6916.55 | 70.14 | 6915.93 | 70.26 | 6915.92 | 73.03 | 6915.84 | 78.27 | 6917.25 |
| 87.59 | 6919.98 | 149.06 | 6921.29 | 162.54 | 6921.54 | 175.32 | 6921.49 | 218.27 | 6921.33 |

Manning's n Values num= 3

| Sta n Val | Sta n Val | Sta n Val |
|-----------|-----------|------------|
| 0 .045 | 44.36 .04 | 87.59 .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 44.36 87.59 50.1 50.1 50.1 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2681.28

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6920.08 | 10.07 | 6919.86 | 28.38 | 6918.78 | 49.99 | 6917.31 | 60.09 | 6916.05 |
| 67.57 | 6915.26 | 70.91 | 6915.09 | 75.15 | 6914.88 | 77.09 | 6914.78 | 83.92 | 6917.05 |
| 90.44 | 6919.08 | 131.67 | 6919.81 | 150 | 6920.14 | | | | |

Phase 1

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 10.07 .04 90.44 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 10.07 90.44 50.08 50.08 50.08 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2631.19

INPUT

Description:

Station Elevation Data num= 18
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6919.2 3.3 6919.1 12.14 6918.81 18.04 6918.56 48.18 6917.64
 51.78 6916.91 63.76 6914.18 67.1 6913.94 69.93 6913.83 73.42 6913.71
 84.69 6916.51 90.07 6918.05 101.83 6918.14 152.13 6918.8 209.76 6918.3
 213.27 6918.29 216.87 6917.85 217.08 6917.83

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 48.18 .04 90.07 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 48.18 90.07 51.08 51.08 51.08 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2580.11

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6918.26 6.74 6917.96 8.13 6917.91 9.41 6917.85 36.41 6916.26
 36.83 6916.17 51.62 6913.17 57.5 6912.98 60.57 6912.9 63.17 6912.83

Phase 1

71.84 6915.53 76.79 6916.76 101.56 6916.8 154.82 6917.11

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 36.41 .04 76.79 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 36.41 76.79 49.05 49.05 49.05 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2531.06

INPUT

Description:

Station Elevation Data num= 15
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6918.43 13.25 6917.98 27.48 6917.37 30.62 6916.28 36.17 6915.49
 61.7 6912.49 68.63 6912.49 68.87 6912.49 72.47 6912.38 86.97 6914.65
 88.06 6914.77 141.53 6915.68 154.56 6915.97 176.13 6916.25 196.52 6916.51

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 27.48 .04 88.06 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 27.48 88.06 50.03 50.03 50.03 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2481.04

INPUT

Description:

Station Elevation Data num= 14
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6917.26 21.33 6917.34 43.19 6915.76 50.05 6915.24 58.83 6913.21

Phase 1

| | | | | | | | | | |
|-------|---------|--------|---------|--------|---------|--------|---------|-------|---------|
| 65.27 | 6911.7 | 72.86 | 6911.55 | 73.69 | 6911.54 | 75.82 | 6911.56 | 81.29 | 6912.14 |
| 96.3 | 6913.77 | 116.43 | 6914.35 | 183.46 | 6915.89 | 185.27 | 6915.94 | | |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 21.33 | .04 | 183.46 | .045 |

| | | | | | | | | |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 21.33 | 183.46 | | 49.82 | 49.82 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2431.22

INPUT

Description:

Station Elevation Data num= 15

| | | | | | | | | | |
|-------|---------|-------|---------|-------|---------|--------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6915.25 | 10.77 | 6915.03 | 39.35 | 6914.35 | 46.94 | 6914.01 | 52.03 | 6913.79 |
| 56.47 | 6912.59 | 67.16 | 6910.68 | 76.2 | 6910.7 | 78.84 | 6910.71 | 79.96 | 6910.7 |
| 82.85 | 6911.1 | 97.61 | 6913.31 | 98.49 | 6913.33 | 116.83 | 6913.83 | 150 | 6914.72 |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 46.94 | .04 | 98.49 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 46.94 | 98.49 | | 50.3 | 50.3 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2380.91

INPUT

Description:

Station Elevation Data num= 13

| | | | | | | | |
|-----|------|-----|------|-----|------|-----|------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|-----|------|-----|------|-----|------|-----|------|

Phase 1

| | | | | | | | | | |
|-------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6913.9 | .43 | 6913.88 | 22.4 | 6913.14 | 42.22 | 6912.55 | 51.23 | 6911.52 |
| 66.38 | 6909.67 | 72.38 | 6908.29 | 75.12 | 6907.81 | 75.59 | 6907.97 | 79.67 | 6909.31 |
| 90.18 | 6912.93 | 130.62 | 6913.82 | 150 | 6914.18 | | | | |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 42.22 | .04 | 90.18 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 42.22 | 90.18 | | 50.18 50.18 | 50.18 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2330.73

INPUT

Description:

| | | | | | | | | | |
|---------|-----------|--------|---------|--------|---------|--------|---------|--------|---------|
| Station | Elevation | Data | num= | 14 | | | | | |
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6913.49 | 15.78 | 6913.3 | 61.91 | 6911.47 | 66.32 | 6911.31 | 76.86 | 6910.37 |
| 95.48 | 6908.73 | 100.28 | 6908.56 | 101.43 | 6908.48 | 104.23 | 6908.31 | 110.73 | 6909.36 |
| 126.12 | 6911.75 | 135.5 | 6912.03 | 171.12 | 6912.6 | 174.35 | 6912.65 | | |

Manning's n Values num= 3

| | | | | | |
|-----|-------|-------|-------|-------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 15.78 | .04 | 135.5 | .045 |

| | | | | | | | | |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
| | 15.78 | 135.5 | | 50.18 50.18 | 50.18 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2280.56

INPUT

Description:

| | | | | |
|---------|-----------|------|------|----|
| Station | Elevation | Data | num= | 17 |
|---------|-----------|------|------|----|

Phase 1

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6911.82 | 21.63 | 6911.72 | 68.2 | 6910.1 | 77.81 | 6909.72 | 84.67 | 6908.79 |
| 89.07 | 6908.18 | 99.56 | 6908.29 | 102.09 | 6908.32 | 114.97 | 6908.44 | 120.41 | 6909.11 |
| 134.47 | 6911.06 | 178.67 | 6912.22 | 186.02 | 6912.38 | 191.75 | 6912.56 | 215.43 | 6912.97 |
| 242.12 | 6913.43 | 244.08 | 6913.51 | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 77.81 | .04 | 134.47 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|-------|--------|-------|-------|-------|----|----|
| 77.81 | 134.47 | 50.01 | 50.01 | 50.01 | .1 | .3 |
|-------|--------|-------|-------|-------|----|----|

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2230.55

INPUT

Description:

Station Elevation Data num= 13

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|--------|---------|-------|---------|-------|---------|-------|---------|
| 0 | 6910.61 | 1.56 | 6910.61 | 23.77 | 6909.76 | 50.13 | 6908.84 | 60.48 | 6907.4 |
| 61.16 | 6907.31 | 62.7 | 6907.3 | 75.05 | 6907.38 | 89 | 6907.46 | 92.6 | 6908.02 |
| 107.95 | 6910.49 | 119.02 | 6910.41 | 150 | 6911.34 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .045 | 1.56 | .04 | 107.95 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|--------|-------|-------|-------|----|----|
| 1.56 | 107.95 | 50.08 | 50.08 | 50.08 | .1 | .3 |
|------|--------|-------|-------|-------|----|----|

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2180.47

INPUT

Phase 1

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6909.97 | 8.28 | 6910.07 | 13.9 | 6909.74 | 24.43 | 6909.15 | 45.28 | 6908.07 |
| 57.94 | 6906.38 | 59.54 | 6906.18 | 61.87 | 6906.21 | 75.05 | 6906.3 | 88.29 | 6906.39 |
| 94.06 | 6907.33 | 109.9 | 6910.46 | 150 | 6910.88 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|-------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 8.28 | .04 | 109.9 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 8.28 | 109.9 | | 50.07 | 50.07 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2130.39

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 14 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6909.22 | 5.2 | 6909.25 | 19.11 | 6908.3 | 32.48 | 6907.46 | 50.08 | 6905.59 |
| 53.71 | 6905.09 | 59.94 | 6905.13 | 75.13 | 6905.29 | 92.37 | 6905.47 | 103.43 | 6907.89 |
| 118.11 | 6910.41 | 137.07 | 6910.55 | 144.67 | 6910.76 | 150 | 6910.91 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 5.2 | .04 | 118.11 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 5.2 | 118.11 | | 50.08 | 50.08 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 2080.32

Phase 1

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 14 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6908.48 | 6.15 | 6908.5 | 10.02 | 6908.21 | 19.07 | 6907.14 | 26.74 | 6906.22 |
| 32.27 | 6905.66 | 49.04 | 6903.79 | 74.82 | 6904.43 | 88.43 | 6904.77 | 103.66 | 6905.1 |
| 122.34 | 6909.12 | 127.5 | 6909.92 | 143.26 | 6910.52 | 150 | 6910.74 | | |

Manning's n Values

| Sta | | n Val | | Sta | | n Val | | num= | | 3 | |
|-----|-------|-------|-------|-------|-------|-------|-------|------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 6.15 | .04 | 127.5 | .045 | | | | | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 6.15 | 127.5 | | 49.97 | 49.97 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 2030.34

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6907.76 | 9.89 | 6907.45 | 17.07 | 6906.74 | 23.21 | 6905.85 | 42.66 | 6903.64 |
| 45.68 | 6903.25 | 74.42 | 6903.7 | 98.82 | 6904.09 | 109.01 | 6904.25 | 110.23 | 6904.49 |
| 132.05 | 6908.89 | 142 | 6909.17 | 150 | 6909.42 | | | | |

Manning's n Values

| Sta | | n Val | | Sta | | n Val | | num= | | 3 | |
|-----|-------|-------|-------|--------|-------|-------|-------|------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 9.89 | .04 | 132.05 | .045 | | | | | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 9.89 | 132.05 | | 50.08 | 50.08 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM RS: 1980.26

Phase 1

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6906.82 | 9.47 | 6906.54 | 20.03 | 6905.52 | 29.79 | 6904.81 | 44.84 | 6903.15 |
| 46.69 | 6902.93 | 50.42 | 6902.97 | 74.42 | 6903.16 | 111.98 | 6903.44 | 122.44 | 6905.66 |
| 132.44 | 6907.76 | 144.92 | 6907.83 | 150 | 6907.94 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 9.47 | .04 | 132.44 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 9.47 | 132.44 | | 50.02 | 50.02 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1930.24

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 14 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6906.83 | 2.6 | 6906.83 | 24.26 | 6906.52 | 57.8 | 6904.5 | 68.74 | 6903.96 |
| 75.6 | 6903.31 | 86.59 | 6902.27 | 109.59 | 6902.51 | 134.76 | 6902.78 | 138.55 | 6902.8 |
| 144.24 | 6903.49 | 165.28 | 6905.85 | 170.19 | 6906.05 | 182.84 | 6906.33 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 24.26 | .04 | 170.19 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 24.26 | 170.19 | | 50.03 | 50.03 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

Phase 1

REACH: NCONFL-BGM RS: 1880.22

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6906.09 | 7.45 | 6906.08 | 30.5 | 6905.83 | 55.96 | 6904.57 | 83.9 | 6902.98 |
| 84.52 | 6902.93 | 100.86 | 6901.84 | 115.53 | 6901.81 | 129.31 | 6901.77 | 132.98 | 6901.8 |
| 145.61 | 6903.03 | 175.17 | 6905.83 | 188.45 | 6906.15 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 30.5 | .04 | 175.17 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 30.5 | 175.17 | | 50.23 | 50.23 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
REACH: NCONFL-BGM RS: 1829.99

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 13 | |
|---------|---------|-----------|---------|-------|---------|-------|---------|-------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6904.58 | 10.75 | 6904.47 | 13.78 | 6904.31 | 33.62 | 6903.13 | 51.09 | 6902.12 |
| 52.48 | 6901.98 | 61.55 | 6901.26 | 74.51 | 6901.25 | 81.26 | 6901.25 | 88.3 | 6901.2 |
| 104.78 | 6902.72 | 137.72 | 6905.89 | 150 | 6906.25 | | | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 10.75 | .04 | 137.72 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 10.75 | 137.72 | | 50.14 | 50.14 | | .1 | .3 |

CROSS SECTION

Phase 1

RIVER: UT_BSC2
 REACH: NCONFL-BGM

RS: 1779.84

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 14 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6903.08 | 10.31 | 6903.01 | 20.44 | 6902.68 | 47.13 | 6901.17 | 48.74 | 6901.04 |
| 58.16 | 6900.25 | 69.18 | 6900.3 | 74.77 | 6900.32 | 93.92 | 6900.39 | 132.45 | 6905.6 |
| 133.42 | 6905.71 | 133.78 | 6905.72 | 148.41 | 6905.96 | 150 | 6905.98 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 10.31 | .04 | 133.78 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 10.31 | 133.78 | | 49.8 | 49.8 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM

RS: 1730.05

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 19 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6903.29 | .48 | 6903.28 | 2.59 | 6903.26 | 14.65 | 6902.96 | 15.17 | 6902.95 |
| 50.62 | 6902.08 | 59.82 | 6901.9 | 63.99 | 6901.8 | 91.99 | 6900.98 | 103.49 | 6900.66 |
| 104.95 | 6900.55 | 118.29 | 6899.84 | 138.14 | 6899.82 | 139.35 | 6899.82 | 163.67 | 6899.75 |
| 193.9 | 6904.45 | 195.26 | 6904.65 | 196.13 | 6904.67 | 211.27 | 6904.87 | | |

| Manning's n | | Values | | num= | | 3 | |
|-------------|-------|--------|-------|--------|-------|-----|-------|
| Sta | n Val | Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 15.17 | .04 | 196.13 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 15.17 | 196.13 | | 49.95 | 49.95 | | .1 | .3 |

CROSS SECTION

Phase 1

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1680.09

INPUT

Description:

Station Elevation Data num= 19

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6902.5 | 6.93 | 6902.99 | 8.14 | 6903.01 | 39.36 | 6901.96 | 42.3 | 6901.88 |
| 44.68 | 6901.82 | 123.09 | 6900.28 | 126.95 | 6900.19 | 131.45 | 6899.98 | 147.78 | 6899.58 |
| 168.39 | 6899.71 | 171.02 | 6899.72 | 193.75 | 6899.76 | 222.18 | 6902.98 | 223.04 | 6903.08 |
| 223.27 | 6903.08 | 242.45 | 6903.45 | 277.3 | 6904.2 | 284.5 | 6904.23 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .045 | 8.14 | .04 | 223.04 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.

| | | | | | | |
|------|--------|-------|-------|-------|----|----|
| 8.14 | 223.04 | 49.91 | 49.91 | 49.91 | .1 | .3 |
|------|--------|-------|-------|-------|----|----|

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1630.18

INPUT

Description:

Station Elevation Data num= 24

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6901.82 | 3.92 | 6902.16 | 6.58 | 6902.39 | 12.3 | 6902.49 | 15.32 | 6902.55 |
| 21.1 | 6902.35 | 25.17 | 6902.21 | 51.67 | 6901.33 | 102.76 | 6900.15 | 118.11 | 6899.75 |
| 142.55 | 6898.99 | 157.36 | 6899.12 | 160.23 | 6899.28 | 173.9 | 6899.61 | 174.86 | 6899.64 |
| 188.52 | 6899.92 | 189.21 | 6899.93 | 197.93 | 6899.5 | 201.03 | 6899.35 | 218.05 | 6901.03 |
| 224.55 | 6901.7 | 228.53 | 6901.79 | 281.43 | 6902.4 | 294.65 | 6902.49 | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 25.17 | .04 | 197.93 | .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 25.17 197.93 50.47 50.47 50.47 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1579.72

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6901.59 | 2.06 | 6901.59 | 7.04 | 6901.57 | 15.57 | 6901.33 | 43.98 | 6900.34 |
| 66.12 | 6899.74 | 74.32 | 6899.49 | 118.46 | 6899.89 | 144.62 | 6899.63 | 166.55 | 6899.4 |
| 180.14 | 6898.93 | 185.57 | 6898.29 | 201.22 | 6899.59 | 206.55 | 6899.96 | 252.15 | 6900.82 |
| 254.18 | 6900.88 | 255.31 | 6900.91 | 259.84 | 6900.97 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .045 | 7.04 | .04 | 254.18 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 7.04 254.18 50.28 50.28 50.28 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1529.44

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6899.88 | 4.45 | 6900.06 | 9.08 | 6900.11 | 32.59 | 6899.49 | 43.11 | 6899.21 |
| 85.62 | 6898.17 | 136.39 | 6897.97 | 148.44 | 6897.92 | 152.79 | 6897.91 | 154.06 | 6897.87 |
| 157.25 | 6897.99 | 202.23 | 6899.17 | 208.34 | 6899.21 | 236.29 | 6900.05 | 262.22 | 6900.88 |
| 275.94 | 6901.08 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|--------|-------|
| 0 | .045 | 7.04 | .04 | 254.18 | .045 |

Phase 1

Sta n Val Sta n Val Sta n Val
 0 .045 9.08 .04 262.22 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 9.08 262.22 49.86 49.86 49.86 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1479.58

INPUT

Description:

Station Elevation Data num= 18

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6898.94 | 10.45 | 6898.71 | 16.94 | 6898.13 | 54.66 | 6897.28 | 72.38 | 6897.55 |
| 92.11 | 6897.48 | 108.73 | 6897.41 | 135.95 | 6897.51 | 142.29 | 6897.57 | 144.79 | 6897.6 |
| 172.75 | 6898.08 | 172.79 | 6898.08 | 180.01 | 6898.25 | 214.74 | 6899.1 | 227.93 | 6899.3 |
| 259.53 | 6900.29 | 259.56 | 6900.29 | 266.11 | 6900.36 | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-----|-------|--------|-------|
| 0 | .045 | 0 | .04 | 259.53 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 0 259.53 50.17 50.17 50.17 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1429.4

INPUT

Description:

Station Elevation Data num= 24

| Sta | Elev |
|--------|---------|--------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6897.37 | 7.1 | 6897.19 | 9.98 | 6897.11 | 13.15 | 6897.51 | 28.03 | 6897.92 |
| 30.39 | 6897.92 | 33.72 | 6897.79 | 64.2 | 6896.43 | 97.65 | 6897 | 111.18 | 6897.22 |
| 136.14 | 6897.73 | 136.58 | 6897.73 | 136.63 | 6897.73 | 137.26 | 6897.73 | 179.1 | 6896.36 |

Phase 1

180.25 6896.37 183.9 6896.41 185.63 6896.94 208.58 6897.29 258.32 6899.12
 259.97 6899.22 265.98 6899.49 280.35 6899.49 302.4 6899.76

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 30.39 .04 265.98 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 30.39 265.98 50.22 50.22 50.22 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1379.19

INPUT

Description:

Station Elevation Data num= 23
 Sta Elev Sta Elev Sta Elev Sta Elev Sta Elev
 0 6895.62 .12 6895.61 36.32 6896.21 53.71 6896.47 75.26 6897.27
 76.03 6897.29 76.07 6897.29 91.24 6896.72 97.25 6896.52 100.08 6895.77
 125.33 6894.94 129.35 6894.98 135.84 6895.04 139.62 6896.21 153.34 6896.42
 183.07 6897.51 193.08 6898.17 218.95 6899.32 220.94 6899.32 222.25 6899.32
 229.54 6899.61 237.52 6899.45 241.42 6899.44

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 76.07 .04 218.95 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 76.07 218.95 50.07 50.07 50.07 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1329.11

INPUT

Description:

Phase 1

| Station Elevation Data | | num= 20 | | Sta | | Elev | | Sta | | Elev | |
|------------------------|---------|---------|---------|-------|---------|--------|---------|--------|---------|------|--|
| 0 | 6896.76 | .27 | 6896.77 | 18.93 | 6897.05 | 18.94 | 6897.05 | 25.36 | 6895.86 | | |
| 29.98 | 6895.69 | 42.08 | 6895.3 | 47.76 | 6893.78 | 55.5 | 6893.53 | 62.37 | 6893.6 | | |
| 71.69 | 6893.68 | 77.52 | 6895.48 | 82.03 | 6895.55 | 91.81 | 6895.91 | 110.15 | 6897.11 | | |
| 119.33 | 6897.52 | 130.14 | 6897.52 | 137.2 | 6897.5 | 159.37 | 6898.4 | 175.32 | 6898.97 | | |

| Manning's n Values | | num= 3 | | Sta | | n Val | |
|--------------------|------|--------|-----|--------|------|-------|--|
| 0 | .045 | 18.93 | .04 | 119.33 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 18.93 | 119.33 | | 50.05 | 50.05 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1279.06

INPUT
 Description:

| Station Elevation Data | | num= 23 | | Sta | | Elev | | Sta | | Elev | |
|------------------------|---------|---------|---------|--------|---------|--------|---------|--------|---------|------|--|
| 0 | 6895.52 | 2.98 | 6895.69 | 11.3 | 6896.14 | 21.38 | 6895.92 | 37.79 | 6893.21 | | |
| 45.21 | 6891.73 | 57.32 | 6891.49 | 62.54 | 6889.74 | 62.55 | 6889.74 | 66.21 | 6889.28 | | |
| 69.25 | 6889.35 | 74.59 | 6889.28 | 85.9 | 6889.13 | 91.38 | 6892.02 | 96.92 | 6892.54 | | |
| 127.41 | 6893.56 | 129.81 | 6893.59 | 137.69 | 6895.62 | 140.07 | 6895.68 | 144.43 | 6895.79 | | |
| 146.08 | 6895.8 | 147.85 | 6896.16 | 150 | 6896.19 | | | | | | |

| Manning's n Values | | num= 3 | | Sta | | n Val | |
|--------------------|------|--------|-----|--------|------|-------|--|
| 0 | .045 | 21.38 | .04 | 137.69 | .045 | | |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|--------|----------|--------------|-------|-------|--------|--------|
| | 21.38 | 137.69 | | 50.08 | 50.08 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

Phase 1

REACH: NCONFL-BGM

RS: 1228.98

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 21 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6894.35 | 2.29 | 6894.47 | 7.64 | 6894.85 | 25.6 | 6893.42 | 34.28 | 6893.23 |
| 42.32 | 6891.9 | 45.96 | 6891.17 | 51.88 | 6891.06 | 54.44 | 6890.2 | 54.45 | 6890.2 |
| 65.86 | 6888.78 | 74.59 | 6888.96 | 75.36 | 6888.98 | 85.1 | 6888.85 | 88.31 | 6890.54 |
| 104.84 | 6892.1 | 123.12 | 6892.71 | 129.88 | 6892.8 | 134.6 | 6894.01 | 141.16 | 6894.17 |
| 150 | 6894.39 | | | | | | | | |

Manning's n Values

num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|------|-------|-------|-------|
| 0 | .045 | 7.64 | .04 | 134.6 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|-------|----------|--------------|-------|-------|--------|--------|
| | 7.64 | 134.6 | | 50.08 | 50.08 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2

REACH: NCONFL-BGM

RS: 1178.9

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 21 | |
|---------|---------|-----------|---------|--------|---------|-------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6894.08 | 36.66 | 6892.64 | 38.75 | 6892.52 | 40.72 | 6892.49 | 42.5 | 6891.63 |
| 42.59 | 6889.77 | 45.59 | 6890.58 | 47.79 | 6890.64 | 47.8 | 6890.64 | 48.4 | 6890.41 |
| 65.51 | 6888.27 | 74.59 | 6888.46 | 81.47 | 6888.61 | 84.3 | 6888.57 | 85.23 | 6889.07 |
| 112.76 | 6891.66 | 118.83 | 6891.86 | 129.94 | 6892 | 131.5 | 6892.4 | 142.26 | 6892.66 |
| 150 | 6892.85 | | | | | | | | |

Manning's n Values

num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|-------|-------|
| 0 | .045 | 36.66 | .04 | 131.5 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|-------|-------|----------|--------------|-------|-------|--------|--------|
| | 36.66 | 131.5 | | 50.31 | 50.31 | | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1128.6

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 19 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6894.04 | 2.72 | 6894.07 | 9.98 | 6893.64 | 21.21 | 6891.55 | 25.74 | 6891.01 |
| 35.28 | 6889.26 | 55.82 | 6886.35 | 62.27 | 6885.25 | 67.09 | 6885.33 | 72.15 | 6885.37 |
| 82.05 | 6885.45 | 123.13 | 6886.62 | 131.01 | 6888.31 | 159.52 | 6889.99 | 175.93 | 6890.37 |
| 182.4 | 6890.4 | 182.62 | 6890.41 | 183.5 | 6890.43 | 186.85 | 6890.52 | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 9.98 | .04 | 175.93 | .045 |

| Bank Sta: | Left | Right | Lengths: | Left Channel | Right | Coeff | Contr. | Expan. |
|-----------|------|--------|----------|--------------|-------|-------|--------|--------|
| | 9.98 | 175.93 | | 50.13 | 50.13 | 50.13 | .1 | .3 |

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1078.47

INPUT

Description:

| Station | | Elevation | | Data | | num= | | 17 | |
|---------|---------|-----------|---------|--------|---------|--------|---------|--------|---------|
| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
| 0 | 6893.38 | 7.97 | 6893.47 | 11.03 | 6893.11 | 43.57 | 6887.14 | 55.97 | 6885.38 |
| 59.86 | 6884.72 | 71.3 | 6884.91 | 74.21 | 6884.96 | 82.63 | 6885.03 | 105.76 | 6885.69 |
| 124.96 | 6889.81 | 142.19 | 6890.83 | 178.29 | 6891.67 | 192.54 | 6891.73 | 193.02 | 6891.75 |
| 194.96 | 6891.8 | 199.21 | 6891.91 | | | | | | |

| Manning's n Values | | num= | | 3 | |
|--------------------|-------|------|-------|--------|-------|
| Sta | n Val | Sta | n Val | Sta | n Val |
| 0 | .045 | 7.97 | .04 | 178.29 | .045 |

Phase 1

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 7.97 178.29 49.85 49.85 49.85 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1028.62

INPUT

Description:

Station Elevation Data num= 16

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|-------|---------|--------|---------|--------|---------|
| 0 | 6892.12 | 10.03 | 6892.05 | 13.94 | 6892.08 | 15.76 | 6892.37 | 40.21 | 6887.63 |
| 40.39 | 6887.58 | 54.33 | 6885.03 | 58.63 | 6884.41 | 59.99 | 6884.18 | 72.98 | 6884.41 |
| 83.82 | 6884.59 | 85.74 | 6884.61 | 91.01 | 6884.76 | 121.46 | 6891.3 | 127.47 | 6891.66 |
| 171.48 | 6892.68 | | | | | | | | |

Manning's n Values num= 3

| Sta | n Val | Sta | n Val | Sta | n Val |
|-----|-------|-------|-------|--------|-------|
| 0 | .045 | 15.76 | .04 | 127.47 | .045 |

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 15.76 127.47 50.16 50.16 50.16 .1 .3

CROSS SECTION

RIVER: UT_BSC2
 REACH: NCONFL-BGM RS: 1000

INPUT

Description:

Station Elevation Data num= 22

| Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev | Sta | Elev |
|--------|---------|-------|---------|--------|---------|--------|---------|--------|---------|
| 0 | 6891.49 | .07 | 6891.49 | .14 | 6891.5 | .21 | 6891.5 | 23.83 | 6891.84 |
| 23.89 | 6891.84 | 34.15 | 6892.35 | 39.06 | 6892.57 | 49.95 | 6893.05 | 49.99 | 6893.05 |
| 50.98 | 6892.86 | 61.86 | 6883.24 | 74.44 | 6883.37 | 88.74 | 6883.52 | 89.47 | 6883.54 |
| 96.33 | 6887.01 | 106.4 | 6892.11 | 113.12 | 6892.47 | 113.15 | 6892.47 | 114.07 | 6892.45 |
| 122.35 | 6892.06 | 150 | 6892.54 | | | | | | |

Phase 1

Manning's n Values num= 3
 Sta n Val Sta n Val Sta n Val
 0 .045 39.06 .04 96.33 .045

Bank Sta: Left Right Lengths: Left Channel Right Coeff Contr. Expan.
 39.06 96.33 0 0 0 .1 .3

SUMMARY OF MANNING'S N VALUES

River: UT_BSC2

| Reach | River Sta. | n1 | n2 | n3 |
|------------|------------|------|-----|------|
| NCONFL-BGM | 6115.07 | .045 | .04 | .045 |
| NCONFL-BGM | 6072.11 | .045 | .04 | .045 |
| NCONFL-BGM | 6022.84 | .045 | .04 | .045 |
| NCONFL-BGM | 5997.93 | .045 | .04 | .045 |
| NCONFL-BGM | 5947.6 | .045 | .04 | .045 |
| NCONFL-BGM | 5896.86 | .045 | .04 | .045 |
| NCONFL-BGM | 5847.54 | .045 | .04 | .045 |
| NCONFL-BGM | 5797.19 | .045 | .04 | .045 |
| NCONFL-BGM | 5747.26 | .045 | .04 | .045 |
| NCONFL-BGM | 5697.32 | .045 | .04 | .045 |
| NCONFL-BGM | 5646.36 | .045 | .04 | .045 |
| NCONFL-BGM | 5596.65 | .045 | .04 | .045 |
| NCONFL-BGM | 5546.7 | .045 | .04 | .045 |
| NCONFL-BGM | 5497.37 | .045 | .04 | .045 |
| NCONFL-BGM | 5448.05 | .045 | .04 | .045 |
| NCONFL-BGM | 5397.9 | .045 | .04 | .045 |
| NCONFL-BGM | 5348.75 | .045 | .04 | .045 |
| NCONFL-BGM | 5297.02 | .045 | .04 | .045 |
| NCONFL-BGM | 5248.07 | .045 | .04 | .045 |
| NCONFL-BGM | 5198.14 | .045 | .04 | .045 |
| NCONFL-BGM | 5147.26 | .045 | .04 | .045 |
| NCONFL-BGM | 5135.07 | .045 | .04 | .045 |
| NCONFL-BGM | 5125.28 | .045 | .04 | .045 |
| NCONFL-BGM | 5104.02 | .045 | .04 | .045 |
| NCONFL-BGM | 5077.4 | .045 | .04 | .045 |

Phase 1

| | | | | |
|------------|---------|----------|------|------|
| NCONFL-BGM | 5045.44 | .045 | .04 | .045 |
| NCONFL-BGM | 5013 | .045 | .04 | .045 |
| NCONFL-BGM | 4975.46 | .045 | .04 | .045 |
| NCONFL-BGM | 4925.42 | .045 | .04 | .045 |
| NCONFL-BGM | 4875.34 | .045 | .04 | .045 |
| NCONFL-BGM | 4825.05 | .045 | .04 | .045 |
| NCONFL-BGM | 4775.09 | .045 | .04 | .045 |
| NCONFL-BGM | 4724.45 | .045 | .04 | .045 |
| NCONFL-BGM | 4672.94 | .045 | .04 | .045 |
| NCONFL-BGM | 4623.27 | .045 | .04 | .045 |
| NCONFL-BGM | 4575.02 | .045 | .04 | .045 |
| NCONFL-BGM | 4524.43 | .045 | .04 | .045 |
| NCONFL-BGM | 4475.61 | .045 | .04 | .045 |
| NCONFL-BGM | 4424.53 | .045 | .04 | .045 |
| NCONFL-BGM | 4374.51 | .045 | .04 | .045 |
| NCONFL-BGM | 4315.85 | .045 | .04 | .045 |
| NCONFL-BGM | 4261.63 | .045 | .04 | .045 |
| NCONFL-BGM | 4246.89 | .045 | .04 | .045 |
| NCONFL-BGM | 4227.84 | .045 | .04 | .045 |
| NCONFL-BGM | 4212.47 | .045 | .04 | .045 |
| NCONFL-BGM | 4166.74 | .045 | .04 | .045 |
| NCONFL-BGM | 4151.92 | .045 | .04 | .045 |
| NCONFL-BGM | 4136 | .045 | .013 | .045 |
| NCONFL-BGM | 4073 | Cul vert | | |
| NCONFL-BGM | 4010.56 | .045 | .04 | .045 |
| NCONFL-BGM | 4001.57 | .045 | .04 | .045 |
| NCONFL-BGM | 3971.12 | .045 | .04 | .045 |
| NCONFL-BGM | 3934.28 | .045 | .04 | .045 |
| NCONFL-BGM | 3883.5 | .045 | .04 | .045 |
| NCONFL-BGM | 3833.2 | .045 | .04 | .045 |
| NCONFL-BGM | 3782.77 | .045 | .04 | .045 |
| NCONFL-BGM | 3732.99 | .045 | .04 | .045 |
| NCONFL-BGM | 3682.83 | .045 | .04 | .045 |
| NCONFL-BGM | 3631.5 | .045 | .04 | .045 |
| NCONFL-BGM | 3582.8 | .045 | .04 | .045 |
| NCONFL-BGM | 3532.66 | .045 | .04 | .045 |
| NCONFL-BGM | 3482.57 | .045 | .04 | .045 |
| NCONFL-BGM | 3432.47 | .045 | .04 | .045 |
| NCONFL-BGM | 3382.53 | .045 | .04 | .045 |
| NCONFL-BGM | 3332.36 | .045 | .04 | .045 |
| NCONFL-BGM | 3282.15 | .045 | .04 | .045 |

Phase 1

| | | | | |
|------------|---------|------|-----|------|
| NCONFL-BGM | 3232.26 | .045 | .04 | .045 |
| NCONFL-BGM | 3182.09 | .045 | .04 | .045 |
| NCONFL-BGM | 3132.01 | .045 | .04 | .045 |
| NCONFL-BGM | 3082.04 | .045 | .04 | .045 |
| NCONFL-BGM | 3032.09 | .045 | .04 | .045 |
| NCONFL-BGM | 2981.9 | .045 | .04 | .045 |
| NCONFL-BGM | 2931.64 | .045 | .04 | .045 |
| NCONFL-BGM | 2881.41 | .045 | .04 | .045 |
| NCONFL-BGM | 2831.54 | .045 | .04 | .045 |
| NCONFL-BGM | 2781.44 | .045 | .04 | .045 |
| NCONFL-BGM | 2731.38 | .045 | .04 | .045 |
| NCONFL-BGM | 2681.28 | .045 | .04 | .045 |
| NCONFL-BGM | 2631.19 | .045 | .04 | .045 |
| NCONFL-BGM | 2580.11 | .045 | .04 | .045 |
| NCONFL-BGM | 2531.06 | .045 | .04 | .045 |
| NCONFL-BGM | 2481.04 | .045 | .04 | .045 |
| NCONFL-BGM | 2431.22 | .045 | .04 | .045 |
| NCONFL-BGM | 2380.91 | .045 | .04 | .045 |
| NCONFL-BGM | 2330.73 | .045 | .04 | .045 |
| NCONFL-BGM | 2280.56 | .045 | .04 | .045 |
| NCONFL-BGM | 2230.55 | .045 | .04 | .045 |
| NCONFL-BGM | 2180.47 | .045 | .04 | .045 |
| NCONFL-BGM | 2130.39 | .045 | .04 | .045 |
| NCONFL-BGM | 2080.32 | .045 | .04 | .045 |
| NCONFL-BGM | 2030.34 | .045 | .04 | .045 |
| NCONFL-BGM | 1980.26 | .045 | .04 | .045 |
| NCONFL-BGM | 1930.24 | .045 | .04 | .045 |
| NCONFL-BGM | 1880.22 | .045 | .04 | .045 |
| NCONFL-BGM | 1829.99 | .045 | .04 | .045 |
| NCONFL-BGM | 1779.84 | .045 | .04 | .045 |
| NCONFL-BGM | 1730.05 | .045 | .04 | .045 |
| NCONFL-BGM | 1680.09 | .045 | .04 | .045 |
| NCONFL-BGM | 1630.18 | .045 | .04 | .045 |
| NCONFL-BGM | 1579.72 | .045 | .04 | .045 |
| NCONFL-BGM | 1529.44 | .045 | .04 | .045 |
| NCONFL-BGM | 1479.58 | .045 | .04 | .045 |
| NCONFL-BGM | 1429.4 | .045 | .04 | .045 |
| NCONFL-BGM | 1379.19 | .045 | .04 | .045 |
| NCONFL-BGM | 1329.11 | .045 | .04 | .045 |
| NCONFL-BGM | 1279.06 | .045 | .04 | .045 |
| NCONFL-BGM | 1228.98 | .045 | .04 | .045 |

Phase 1

| | | | | |
|------------|---------|------|-----|------|
| NCONFL-BGM | 1178.9 | .045 | .04 | .045 |
| NCONFL-BGM | 1128.6 | .045 | .04 | .045 |
| NCONFL-BGM | 1078.47 | .045 | .04 | .045 |
| NCONFL-BGM | 1028.62 | .045 | .04 | .045 |
| NCONFL-BGM | 1000 | .045 | .04 | .045 |

SUMMARY OF REACH LENGTHS

Ri ver: UT_BSC2

| Reach | Ri ver Sta. | Left | Channel | Ri ght |
|------------|-------------|-------|---------|--------|
| NCONFL-BGM | 6115.07 | 42.96 | 42.96 | 42.96 |
| NCONFL-BGM | 6072.11 | 49.27 | 49.27 | 49.27 |
| NCONFL-BGM | 6022.84 | 24.9 | 24.9 | 24.9 |
| NCONFL-BGM | 5997.93 | 50.34 | 50.34 | 50.34 |
| NCONFL-BGM | 5947.6 | 50.74 | 50.74 | 50.74 |
| NCONFL-BGM | 5896.86 | 49.32 | 49.32 | 49.32 |
| NCONFL-BGM | 5847.54 | 50.34 | 50.34 | 50.34 |
| NCONFL-BGM | 5797.19 | 49.93 | 49.93 | 49.93 |
| NCONFL-BGM | 5747.26 | 49.94 | 49.94 | 49.94 |
| NCONFL-BGM | 5697.32 | 50.96 | 50.96 | 50.96 |
| NCONFL-BGM | 5646.36 | 49.7 | 49.7 | 49.7 |
| NCONFL-BGM | 5596.65 | 49.95 | 49.95 | 49.95 |
| NCONFL-BGM | 5546.7 | 49.33 | 49.33 | 49.33 |
| NCONFL-BGM | 5497.37 | 49.32 | 49.32 | 49.32 |
| NCONFL-BGM | 5448.05 | 50.15 | 50.15 | 50.15 |
| NCONFL-BGM | 5397.9 | 49.15 | 49.15 | 49.15 |
| NCONFL-BGM | 5348.75 | 51.73 | 51.73 | 51.73 |
| NCONFL-BGM | 5297.02 | 48.95 | 48.95 | 48.95 |
| NCONFL-BGM | 5248.07 | 49.93 | 49.93 | 49.93 |
| NCONFL-BGM | 5198.14 | 50.88 | 50.88 | 50.88 |
| NCONFL-BGM | 5147.26 | 12.18 | 12.18 | 12.18 |
| NCONFL-BGM | 5135.07 | 9.79 | 9.79 | 9.79 |
| NCONFL-BGM | 5125.28 | 21.27 | 21.27 | 21.27 |
| NCONFL-BGM | 5104.02 | 26.62 | 26.62 | 26.62 |
| NCONFL-BGM | 5077.4 | 31.96 | 31.96 | 31.96 |
| NCONFL-BGM | 5045.44 | 32.44 | 32.44 | 32.44 |

Phase 1

| | | | | |
|------------|---------|----------|--------|--------|
| NCONFL-BGM | 5013 | 37.54 | 37.54 | 37.54 |
| NCONFL-BGM | 4975.46 | 50.04 | 50.04 | 50.04 |
| NCONFL-BGM | 4925.42 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 4875.34 | 50.29 | 50.29 | 50.29 |
| NCONFL-BGM | 4825.05 | 49.96 | 49.96 | 49.96 |
| NCONFL-BGM | 4775.09 | 50.64 | 50.64 | 50.64 |
| NCONFL-BGM | 4724.45 | 51.51 | 51.51 | 51.51 |
| NCONFL-BGM | 4672.94 | 49.67 | 49.67 | 49.67 |
| NCONFL-BGM | 4623.27 | 48.25 | 48.25 | 48.25 |
| NCONFL-BGM | 4575.02 | 35.78 | 35.78 | 35.78 |
| NCONFL-BGM | 4524.43 | 63.64 | 63.64 | 63.64 |
| NCONFL-BGM | 4475.61 | 51.08 | 51.08 | 51.08 |
| NCONFL-BGM | 4424.53 | 50.02 | 50.02 | 50.02 |
| NCONFL-BGM | 4374.51 | 58.66 | 58.66 | 58.66 |
| NCONFL-BGM | 4315.85 | 54.22 | 54.22 | 54.22 |
| NCONFL-BGM | 4261.63 | 14.74 | 14.74 | 14.74 |
| NCONFL-BGM | 4246.89 | 19.05 | 19.05 | 19.05 |
| NCONFL-BGM | 4227.84 | 15.37 | 15.37 | 15.37 |
| NCONFL-BGM | 4212.47 | 46.77 | 46.77 | 46.77 |
| NCONFL-BGM | 4166.74 | 13.78 | 13.78 | 13.78 |
| NCONFL-BGM | 4151.92 | 15.92 | 15.92 | 15.92 |
| NCONFL-BGM | 4136 | 125.44 | 125.44 | 125.44 |
| NCONFL-BGM | 4073 | Cul vert | | |
| NCONFL-BGM | 4010.56 | 8.99 | 8.99 | 8.99 |
| NCONFL-BGM | 4001.57 | 30.39 | 30.39 | 30.39 |
| NCONFL-BGM | 3971.12 | 36.9 | 36.9 | 36.9 |
| NCONFL-BGM | 3934.28 | 50.78 | 50.78 | 50.78 |
| NCONFL-BGM | 3883.5 | 50.3 | 50.3 | 50.3 |
| NCONFL-BGM | 3833.2 | 50.43 | 50.43 | 50.43 |
| NCONFL-BGM | 3782.77 | 49.78 | 49.78 | 49.78 |
| NCONFL-BGM | 3732.99 | 50.16 | 50.16 | 50.16 |
| NCONFL-BGM | 3682.83 | 51.33 | 51.33 | 51.33 |
| NCONFL-BGM | 3631.5 | 48.71 | 48.71 | 48.71 |
| NCONFL-BGM | 3582.8 | 50.14 | 50.14 | 50.14 |
| NCONFL-BGM | 3532.66 | 50.09 | 50.09 | 50.09 |
| NCONFL-BGM | 3482.57 | 50.1 | 50.1 | 50.1 |
| NCONFL-BGM | 3432.47 | 49.93 | 49.93 | 49.93 |
| NCONFL-BGM | 3382.53 | 50.18 | 50.18 | 50.18 |
| NCONFL-BGM | 3332.36 | 50.21 | 50.21 | 50.21 |
| NCONFL-BGM | 3282.15 | 49.89 | 49.89 | 49.89 |
| NCONFL-BGM | 3232.26 | 50.17 | 50.17 | 50.17 |

Phase 1

| | | | | |
|------------|---------|-------|-------|-------|
| NCONFL-BGM | 3182.09 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 3132.01 | 49.96 | 49.96 | 49.96 |
| NCONFL-BGM | 3082.04 | 49.96 | 49.96 | 49.96 |
| NCONFL-BGM | 3032.09 | 50.18 | 50.18 | 50.18 |
| NCONFL-BGM | 2981.9 | 50.27 | 50.27 | 50.27 |
| NCONFL-BGM | 2931.64 | 50.22 | 50.22 | 50.22 |
| NCONFL-BGM | 2881.41 | 49.87 | 49.87 | 49.87 |
| NCONFL-BGM | 2831.54 | 50.1 | 50.1 | 50.1 |
| NCONFL-BGM | 2781.44 | 50.07 | 50.07 | 50.07 |
| NCONFL-BGM | 2731.38 | 50.1 | 50.1 | 50.1 |
| NCONFL-BGM | 2681.28 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 2631.19 | 51.08 | 51.08 | 51.08 |
| NCONFL-BGM | 2580.11 | 49.05 | 49.05 | 49.05 |
| NCONFL-BGM | 2531.06 | 50.03 | 50.03 | 50.03 |
| NCONFL-BGM | 2481.04 | 49.82 | 49.82 | 49.82 |
| NCONFL-BGM | 2431.22 | 50.3 | 50.3 | 50.3 |
| NCONFL-BGM | 2380.91 | 50.18 | 50.18 | 50.18 |
| NCONFL-BGM | 2330.73 | 50.18 | 50.18 | 50.18 |
| NCONFL-BGM | 2280.56 | 50.01 | 50.01 | 50.01 |
| NCONFL-BGM | 2230.55 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 2180.47 | 50.07 | 50.07 | 50.07 |
| NCONFL-BGM | 2130.39 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 2080.32 | 49.97 | 49.97 | 49.97 |
| NCONFL-BGM | 2030.34 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 1980.26 | 50.02 | 50.02 | 50.02 |
| NCONFL-BGM | 1930.24 | 50.03 | 50.03 | 50.03 |
| NCONFL-BGM | 1880.22 | 50.23 | 50.23 | 50.23 |
| NCONFL-BGM | 1829.99 | 50.14 | 50.14 | 50.14 |
| NCONFL-BGM | 1779.84 | 49.8 | 49.8 | 49.8 |
| NCONFL-BGM | 1730.05 | 49.95 | 49.95 | 49.95 |
| NCONFL-BGM | 1680.09 | 49.91 | 49.91 | 49.91 |
| NCONFL-BGM | 1630.18 | 50.47 | 50.47 | 50.47 |
| NCONFL-BGM | 1579.72 | 50.28 | 50.28 | 50.28 |
| NCONFL-BGM | 1529.44 | 49.86 | 49.86 | 49.86 |
| NCONFL-BGM | 1479.58 | 50.17 | 50.17 | 50.17 |
| NCONFL-BGM | 1429.4 | 50.22 | 50.22 | 50.22 |
| NCONFL-BGM | 1379.19 | 50.07 | 50.07 | 50.07 |
| NCONFL-BGM | 1329.11 | 50.05 | 50.05 | 50.05 |
| NCONFL-BGM | 1279.06 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 1228.98 | 50.08 | 50.08 | 50.08 |
| NCONFL-BGM | 1178.9 | 50.31 | 50.31 | 50.31 |

Phase 1

| | | | | |
|------------|---------|-------|-------|-------|
| NCONFL-BGM | 1128.6 | 50.13 | 50.13 | 50.13 |
| NCONFL-BGM | 1078.47 | 49.85 | 49.85 | 49.85 |
| NCONFL-BGM | 1028.62 | 50.16 | 50.16 | 50.16 |
| NCONFL-BGM | 1000 | 0 | 0 | 0 |

SUMMARY OF CONTRACTION AND EXPANSION COEFFICIENTS

River: UT_BSC2

| Reach | River Sta. | Contr. | Expan. |
|------------|------------|--------|--------|
| NCONFL-BGM | 6115.07 | .1 | .3 |
| NCONFL-BGM | 6072.11 | .1 | .3 |
| NCONFL-BGM | 6022.84 | .1 | .3 |
| NCONFL-BGM | 5997.93 | .1 | .3 |
| NCONFL-BGM | 5947.6 | .1 | .3 |
| NCONFL-BGM | 5896.86 | .1 | .3 |
| NCONFL-BGM | 5847.54 | .1 | .3 |
| NCONFL-BGM | 5797.19 | .1 | .3 |
| NCONFL-BGM | 5747.26 | .1 | .3 |
| NCONFL-BGM | 5697.32 | .1 | .3 |
| NCONFL-BGM | 5646.36 | .1 | .3 |
| NCONFL-BGM | 5596.65 | .1 | .3 |
| NCONFL-BGM | 5546.7 | .1 | .3 |
| NCONFL-BGM | 5497.37 | .1 | .3 |
| NCONFL-BGM | 5448.05 | .1 | .3 |
| NCONFL-BGM | 5397.9 | .1 | .3 |
| NCONFL-BGM | 5348.75 | .1 | .3 |
| NCONFL-BGM | 5297.02 | .1 | .3 |
| NCONFL-BGM | 5248.07 | .1 | .3 |
| NCONFL-BGM | 5198.14 | .1 | .3 |
| NCONFL-BGM | 5147.26 | .1 | .3 |
| NCONFL-BGM | 5135.07 | .1 | .3 |
| NCONFL-BGM | 5125.28 | .1 | .3 |
| NCONFL-BGM | 5104.02 | .1 | .3 |
| NCONFL-BGM | 5077.4 | .1 | .3 |
| NCONFL-BGM | 5045.44 | .1 | .3 |
| NCONFL-BGM | 5013 | .1 | .3 |

Phase 1

| | | | |
|------------|---------|----------|----|
| NCONFL-BGM | 4975.46 | .1 | .3 |
| NCONFL-BGM | 4925.42 | .1 | .3 |
| NCONFL-BGM | 4875.34 | .1 | .3 |
| NCONFL-BGM | 4825.05 | .1 | .3 |
| NCONFL-BGM | 4775.09 | .1 | .3 |
| NCONFL-BGM | 4724.45 | .1 | .3 |
| NCONFL-BGM | 4672.94 | .1 | .3 |
| NCONFL-BGM | 4623.27 | .1 | .3 |
| NCONFL-BGM | 4575.02 | .1 | .3 |
| NCONFL-BGM | 4524.43 | .1 | .3 |
| NCONFL-BGM | 4475.61 | .1 | .3 |
| NCONFL-BGM | 4424.53 | .1 | .3 |
| NCONFL-BGM | 4374.51 | .1 | .3 |
| NCONFL-BGM | 4315.85 | .1 | .3 |
| NCONFL-BGM | 4261.63 | .1 | .3 |
| NCONFL-BGM | 4246.89 | .1 | .3 |
| NCONFL-BGM | 4227.84 | .1 | .3 |
| NCONFL-BGM | 4212.47 | .1 | .3 |
| NCONFL-BGM | 4166.74 | .1 | .3 |
| NCONFL-BGM | 4151.92 | .3 | .5 |
| NCONFL-BGM | 4136 | .3 | .5 |
| NCONFL-BGM | 4073 | Cul vert | |
| NCONFL-BGM | 4010.56 | .3 | .5 |
| NCONFL-BGM | 4001.57 | .3 | .5 |
| NCONFL-BGM | 3971.12 | .1 | .3 |
| NCONFL-BGM | 3934.28 | .1 | .3 |
| NCONFL-BGM | 3883.5 | .1 | .3 |
| NCONFL-BGM | 3833.2 | .1 | .3 |
| NCONFL-BGM | 3782.77 | .1 | .3 |
| NCONFL-BGM | 3732.99 | .1 | .3 |
| NCONFL-BGM | 3682.83 | .1 | .3 |
| NCONFL-BGM | 3631.5 | .1 | .3 |
| NCONFL-BGM | 3582.8 | .1 | .3 |
| NCONFL-BGM | 3532.66 | .1 | .3 |
| NCONFL-BGM | 3482.57 | .1 | .3 |
| NCONFL-BGM | 3432.47 | .1 | .3 |
| NCONFL-BGM | 3382.53 | .1 | .3 |
| NCONFL-BGM | 3332.36 | .1 | .3 |
| NCONFL-BGM | 3282.15 | .1 | .3 |
| NCONFL-BGM | 3232.26 | .1 | .3 |
| NCONFL-BGM | 3182.09 | .1 | .3 |

Phase 1

| | | | |
|------------|---------|----|----|
| NCONFL-BGM | 3132.01 | .1 | .3 |
| NCONFL-BGM | 3082.04 | .1 | .3 |
| NCONFL-BGM | 3032.09 | .1 | .3 |
| NCONFL-BGM | 2981.9 | .1 | .3 |
| NCONFL-BGM | 2931.64 | .1 | .3 |
| NCONFL-BGM | 2881.41 | .1 | .3 |
| NCONFL-BGM | 2831.54 | .1 | .3 |
| NCONFL-BGM | 2781.44 | .1 | .3 |
| NCONFL-BGM | 2731.38 | .1 | .3 |
| NCONFL-BGM | 2681.28 | .1 | .3 |
| NCONFL-BGM | 2631.19 | .1 | .3 |
| NCONFL-BGM | 2580.11 | .1 | .3 |
| NCONFL-BGM | 2531.06 | .1 | .3 |
| NCONFL-BGM | 2481.04 | .1 | .3 |
| NCONFL-BGM | 2431.22 | .1 | .3 |
| NCONFL-BGM | 2380.91 | .1 | .3 |
| NCONFL-BGM | 2330.73 | .1 | .3 |
| NCONFL-BGM | 2280.56 | .1 | .3 |
| NCONFL-BGM | 2230.55 | .1 | .3 |
| NCONFL-BGM | 2180.47 | .1 | .3 |
| NCONFL-BGM | 2130.39 | .1 | .3 |
| NCONFL-BGM | 2080.32 | .1 | .3 |
| NCONFL-BGM | 2030.34 | .1 | .3 |
| NCONFL-BGM | 1980.26 | .1 | .3 |
| NCONFL-BGM | 1930.24 | .1 | .3 |
| NCONFL-BGM | 1880.22 | .1 | .3 |
| NCONFL-BGM | 1829.99 | .1 | .3 |
| NCONFL-BGM | 1779.84 | .1 | .3 |
| NCONFL-BGM | 1730.05 | .1 | .3 |
| NCONFL-BGM | 1680.09 | .1 | .3 |
| NCONFL-BGM | 1630.18 | .1 | .3 |
| NCONFL-BGM | 1579.72 | .1 | .3 |
| NCONFL-BGM | 1529.44 | .1 | .3 |
| NCONFL-BGM | 1479.58 | .1 | .3 |
| NCONFL-BGM | 1429.4 | .1 | .3 |
| NCONFL-BGM | 1379.19 | .1 | .3 |
| NCONFL-BGM | 1329.11 | .1 | .3 |
| NCONFL-BGM | 1279.06 | .1 | .3 |
| NCONFL-BGM | 1228.98 | .1 | .3 |
| NCONFL-BGM | 1178.9 | .1 | .3 |
| NCONFL-BGM | 1128.6 | .1 | .3 |

Phase 1

| | | | |
|------------|---------|----|----|
| NCONFL-BGM | 1078.47 | .1 | .3 |
| NCONFL-BGM | 1028.62 | .1 | .3 |
| NCONFL-BGM | 1000 | .1 | .3 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM

| Reach | River Sta | Profile | Q Total | Min Ch El | W.S. Elev | Crit W.S. | E.G. Elev | E.G. Slope | Vel Chnl | Flow Area | Top Width | Froude # Chl |
|------------|-----------|-------------|---------|-----------|-----------|-----------|-----------|------------|----------|-----------|-----------|--------------|
| | | | (cfs) | (ft) | (ft) | (ft) | (ft) | (ft/ft) | (ft/s) | (sq ft) | (ft) | |
| NCONFL-BGM | 6115.07 | DBPS 100-YR | 1000.00 | 6968.73 | 6973.37 | | 6973.75 | 0.003689 | 4.96 | 201.80 | 60.77 | 0.48 |
| NCONFL-BGM | 6115.07 | DBPS 2-YR | 100.00 | 6968.73 | 6970.07 | | 6970.16 | 0.003548 | 2.41 | 41.51 | 36.20 | 0.40 |
| NCONFL-BGM | 6072.11 | DBPS 100-YR | 1000.00 | 6968.58 | 6973.23 | | 6973.59 | 0.003543 | 4.82 | 207.26 | 63.16 | 0.47 |
| NCONFL-BGM | 6072.11 | DBPS 2-YR | 100.00 | 6968.58 | 6969.92 | | 6970.01 | 0.003480 | 2.38 | 41.97 | 36.70 | 0.39 |
| NCONFL-BGM | 6022.84 | DBPS 100-YR | 1000.00 | 6968.41 | 6973.05 | | 6973.42 | 0.003555 | 4.83 | 207.05 | 63.16 | 0.47 |
| NCONFL-BGM | 6022.84 | DBPS 2-YR | 100.00 | 6968.41 | 6969.75 | | 6969.84 | 0.003495 | 2.39 | 41.92 | 36.70 | 0.39 |
| NCONFL-BGM | 5997.93 | DBPS 100-YR | 1000.00 | 6968.32 | 6972.97 | | 6973.33 | 0.003552 | 4.83 | 207.08 | 63.14 | 0.47 |
| NCONFL-BGM | 5997.93 | DBPS 2-YR | 100.00 | 6968.32 | 6969.66 | | 6969.75 | 0.003458 | 2.38 | 42.07 | 36.72 | 0.39 |
| NCONFL-BGM | 5947.6 | DBPS 100-YR | 1000.00 | 6968.15 | 6972.78 | | 6973.15 | 0.003585 | 4.84 | 206.45 | 63.10 | 0.47 |
| NCONFL-BGM | 5947.6 | DBPS 2-YR | 100.00 | 6968.15 | 6969.49 | | 6969.57 | 0.003515 | 2.39 | 41.84 | 36.69 | 0.39 |
| NCONFL-BGM | 5896.86 | DBPS 100-YR | 1000.00 | 6967.97 | 6972.60 | | 6972.97 | 0.003601 | 4.85 | 206.10 | 63.04 | 0.47 |
| NCONFL-BGM | 5896.86 | DBPS 2-YR | 100.00 | 6967.97 | 6969.31 | | 6969.40 | 0.003502 | 2.39 | 41.89 | 36.68 | 0.39 |
| NCONFL-BGM | 5847.54 | DBPS 100-YR | 1000.00 | 6967.80 | 6972.42 | | 6972.79 | 0.003627 | 4.86 | 205.56 | 62.97 | 0.47 |
| NCONFL-BGM | 5847.54 | DBPS 2-YR | 100.00 | 6967.80 | 6969.13 | | 6969.22 | 0.003525 | 2.39 | 41.80 | 36.67 | 0.40 |
| NCONFL-BGM | 5797.19 | DBPS 100-YR | 1000.00 | 6967.62 | 6972.24 | | 6972.61 | 0.003641 | 4.87 | 205.26 | 62.92 | 0.48 |
| NCONFL-BGM | 5797.19 | DBPS 2-YR | 100.00 | 6967.62 | 6968.96 | | 6969.05 | 0.003482 | 2.38 | 41.97 | 36.71 | 0.39 |
| NCONFL-BGM | 5747.26 | DBPS 100-YR | 1000.00 | 6967.45 | 6972.05 | | 6972.42 | 0.003692 | 4.90 | 204.24 | 62.80 | 0.48 |
| NCONFL-BGM | 5747.26 | DBPS 2-YR | 100.00 | 6967.45 | 6968.78 | | 6968.87 | 0.003542 | 2.40 | 41.74 | 36.67 | 0.40 |
| NCONFL-BGM | 5697.32 | DBPS 100-YR | 1000.00 | 6967.27 | 6971.86 | | 6972.24 | 0.003724 | 4.91 | 203.61 | 62.72 | 0.48 |
| NCONFL-BGM | 5697.32 | DBPS 2-YR | 100.00 | 6967.27 | 6968.61 | | 6968.70 | 0.003513 | 2.39 | 41.84 | 36.66 | 0.39 |
| NCONFL-BGM | 5646.36 | DBPS 100-YR | 1000.00 | 6967.09 | 6971.67 | | 6972.05 | 0.003769 | 4.93 | 202.70 | 62.58 | 0.48 |
| NCONFL-BGM | 5646.36 | DBPS 2-YR | 100.00 | 6967.09 | 6968.43 | | 6968.52 | 0.003485 | 2.38 | 41.96 | 36.70 | 0.39 |
| NCONFL-BGM | 5596.65 | DBPS 100-YR | 1000.00 | 6966.92 | 6971.47 | | 6971.86 | 0.003850 | 4.97 | 201.18 | 62.40 | 0.49 |
| NCONFL-BGM | 5596.65 | DBPS 2-YR | 100.00 | 6966.92 | 6968.25 | | 6968.34 | 0.003540 | 2.40 | 41.74 | 36.65 | 0.40 |
| NCONFL-BGM | 5546.7 | DBPS 100-YR | 1000.00 | 6966.74 | 6971.27 | | 6971.66 | 0.003918 | 5.00 | 199.92 | 62.25 | 0.49 |
| NCONFL-BGM | 5546.7 | DBPS 2-YR | 100.00 | 6966.74 | 6968.08 | | 6968.17 | 0.003510 | 2.39 | 41.85 | 36.66 | 0.39 |
| NCONFL-BGM | 5497.37 | DBPS 100-YR | 1000.00 | 6966.57 | 6971.07 | | 6971.47 | 0.004030 | 5.05 | 197.88 | 61.97 | 0.50 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|------------|-----------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| NCONFL-BGM | 5497.37 | DBPS 2-YR | 100.00 | 6966.57 | 6967.90 | | 6967.99 | 0.003534 | 2.39 | 41.76 | 36.66 | 0.40 |
| NCONFL-BGM | 5448.05 | DBPS 100-YR | 1000.00 | 6966.40 | 6970.85 | | 6971.26 | 0.004186 | 5.12 | 195.23 | 61.65 | 0.51 |
| NCONFL-BGM | 5448.05 | DBPS 2-YR | 100.00 | 6966.40 | 6967.73 | | 6967.82 | 0.003607 | 2.41 | 41.48 | 36.61 | 0.40 |
| NCONFL-BGM | 5397.9 | DBPS 100-YR | 1000.00 | 6966.22 | 6970.63 | | 6971.05 | 0.004372 | 5.20 | 192.18 | 61.24 | 0.52 |
| NCONFL-BGM | 5397.9 | DBPS 2-YR | 100.00 | 6966.22 | 6967.54 | | 6967.64 | 0.003616 | 2.41 | 41.44 | 36.59 | 0.40 |
| NCONFL-BGM | 5348.75 | DBPS 100-YR | 1000.00 | 6966.05 | 6970.38 | | 6970.82 | 0.004665 | 5.33 | 187.75 | 60.66 | 0.53 |
| NCONFL-BGM | 5348.75 | DBPS 2-YR | 100.00 | 6966.05 | 6967.36 | | 6967.46 | 0.003729 | 2.44 | 41.03 | 36.51 | 0.41 |
| NCONFL-BGM | 5297.02 | DBPS 100-YR | 1000.00 | 6965.87 | 6970.09 | | 6970.57 | 0.005160 | 5.52 | 181.05 | 59.76 | 0.56 |
| NCONFL-BGM | 5297.02 | DBPS 2-YR | 100.00 | 6965.87 | 6967.16 | | 6967.26 | 0.003979 | 2.49 | 40.14 | 36.30 | 0.42 |
| NCONFL-BGM | 5248.07 | DBPS 100-YR | 1000.00 | 6965.70 | 6969.76 | | 6970.29 | 0.006009 | 5.83 | 171.47 | 58.50 | 0.60 |
| NCONFL-BGM | 5248.07 | DBPS 2-YR | 100.00 | 6965.70 | 6966.94 | | 6967.05 | 0.004541 | 2.60 | 38.42 | 35.93 | 0.44 |
| NCONFL-BGM | 5198.14 | DBPS 100-YR | 1000.00 | 6965.52 | 6969.27 | | 6969.93 | 0.008206 | 6.52 | 153.37 | 55.95 | 0.69 |
| NCONFL-BGM | 5198.14 | DBPS 2-YR | 100.00 | 6965.52 | 6966.64 | | 6966.77 | 0.006486 | 2.93 | 34.13 | 34.94 | 0.52 |
| NCONFL-BGM | 5147.26 | DBPS 100-YR | 1000.00 | 6965.06 | 6968.11 | 6968.11 | 6969.28 | 0.018207 | 8.65 | 115.62 | 50.26 | 1.01 |
| NCONFL-BGM | 5147.26 | DBPS 2-YR | 100.00 | 6965.06 | 6965.82 | 6965.82 | 6966.16 | 0.027168 | 4.67 | 21.40 | 31.92 | 1.01 |
| NCONFL-BGM | 5135.07 | DBPS 100-YR | 1000.00 | 6962.01 | 6965.06 | 6965.06 | 6966.23 | 0.018279 | 8.66 | 115.44 | 50.22 | 1.01 |
| NCONFL-BGM | 5135.07 | DBPS 2-YR | 100.00 | 6962.01 | 6962.77 | 6962.77 | 6963.11 | 0.027230 | 4.68 | 21.38 | 31.90 | 1.01 |
| NCONFL-BGM | 5125.28 | DBPS 100-YR | 1000.00 | 6960.09 | 6964.58 | | 6964.98 | 0.004045 | 5.06 | 197.63 | 61.95 | 0.50 |
| NCONFL-BGM | 5125.28 | DBPS 2-YR | 100.00 | 6960.09 | 6961.44 | | 6961.52 | 0.003409 | 2.37 | 42.27 | 36.77 | 0.39 |
| NCONFL-BGM | 5104.02 | DBPS 100-YR | 1000.00 | 6960.01 | 6964.50 | | 6964.90 | 0.004083 | 5.08 | 196.89 | 61.81 | 0.50 |
| NCONFL-BGM | 5104.02 | DBPS 2-YR | 100.00 | 6960.01 | 6961.37 | | 6961.45 | 0.003330 | 2.35 | 42.59 | 36.82 | 0.38 |
| NCONFL-BGM | 5077.4 | DBPS 100-YR | 1000.00 | 6959.92 | 6964.39 | | 6964.79 | 0.004073 | 5.10 | 196.29 | 62.01 | 0.50 |
| NCONFL-BGM | 5077.4 | DBPS 2-YR | 100.00 | 6959.92 | 6961.28 | | 6961.36 | 0.003307 | 2.34 | 42.72 | 36.92 | 0.38 |
| NCONFL-BGM | 5045.44 | DBPS 100-YR | 1200.00 | 6959.81 | 6964.42 | | 6964.64 | 0.002280 | 3.86 | 324.44 | 112.07 | 0.38 |
| NCONFL-BGM | 5045.44 | DBPS 2-YR | 110.00 | 6959.81 | 6961.13 | | 6961.24 | 0.004465 | 2.67 | 41.18 | 36.56 | 0.44 |
| NCONFL-BGM | 5013 | DBPS 100-YR | 1200.00 | 6959.69 | 6963.94 | | 6964.50 | 0.004862 | 6.31 | 218.41 | 81.85 | 0.57 |
| NCONFL-BGM | 5013 | DBPS 2-YR | 110.00 | 6959.69 | 6960.98 | | 6961.09 | 0.004710 | 2.69 | 40.87 | 37.38 | 0.45 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|------------|-----------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| NCONFL-BGM | 4975.46 | DBPS 100-YR | 1200.00 | 6959.57 | 6962.94 | 6962.94 | 6964.12 | 0.018106 | 8.71 | 137.76 | 59.14 | 1.01 |
| NCONFL-BGM | 4975.46 | DBPS 2-YR | 110.00 | 6959.57 | 6960.35 | 6960.35 | 6960.71 | 0.027366 | 4.83 | 22.77 | 32.49 | 1.02 |
| NCONFL-BGM | 4925.42 | DBPS 100-YR | 1200.00 | 6957.48 | 6961.61 | 6961.61 | 6962.79 | 0.018277 | 8.74 | 137.32 | 59.67 | 1.01 |
| NCONFL-BGM | 4925.42 | DBPS 2-YR | 110.00 | 6957.48 | 6958.92 | 6958.89 | 6959.31 | 0.023306 | 4.99 | 22.03 | 26.47 | 0.96 |
| NCONFL-BGM | 4875.34 | DBPS 100-YR | 1200.00 | 6956.08 | 6960.42 | 6960.42 | 6961.53 | 0.018613 | 8.43 | 142.41 | 65.82 | 1.01 |
| NCONFL-BGM | 4875.34 | DBPS 2-YR | 110.00 | 6956.08 | 6957.67 | 6957.67 | 6958.10 | 0.025299 | 5.26 | 20.92 | 24.70 | 1.01 |
| NCONFL-BGM | 4825.05 | DBPS 100-YR | 1200.00 | 6954.44 | 6959.21 | 6959.21 | 6960.39 | 0.017174 | 8.71 | 138.85 | 65.33 | 0.99 |
| NCONFL-BGM | 4825.05 | DBPS 2-YR | 110.00 | 6954.44 | 6956.09 | 6956.09 | 6956.58 | 0.024802 | 5.60 | 19.64 | 20.65 | 1.01 |
| NCONFL-BGM | 4775.09 | DBPS 100-YR | 1200.00 | 6953.12 | 6958.01 | | 6958.80 | 0.008565 | 7.24 | 178.59 | 81.37 | 0.72 |
| NCONFL-BGM | 4775.09 | DBPS 2-YR | 110.00 | 6953.12 | 6954.81 | | 6955.02 | 0.008328 | 3.66 | 30.04 | 26.43 | 0.61 |
| NCONFL-BGM | 4724.45 | DBPS 100-YR | 1200.00 | 6952.24 | 6957.28 | 6957.28 | 6958.26 | 0.012348 | 8.11 | 163.35 | 99.99 | 0.85 |
| NCONFL-BGM | 4724.45 | DBPS 2-YR | 110.00 | 6952.24 | 6954.12 | | 6954.46 | 0.014642 | 4.66 | 23.61 | 22.00 | 0.79 |
| NCONFL-BGM | 4672.94 | DBPS 100-YR | 1200.00 | 6951.54 | 6956.45 | 6956.45 | 6957.52 | 0.013431 | 8.40 | 154.91 | 86.82 | 0.89 |
| NCONFL-BGM | 4672.94 | DBPS 2-YR | 110.00 | 6951.54 | 6953.33 | | 6953.68 | 0.015612 | 4.77 | 23.05 | 21.75 | 0.82 |
| NCONFL-BGM | 4623.27 | DBPS 100-YR | 1200.00 | 6950.54 | 6955.36 | 6955.36 | 6956.49 | 0.012392 | 8.73 | 153.46 | 79.89 | 0.87 |
| NCONFL-BGM | 4623.27 | DBPS 2-YR | 110.00 | 6950.54 | 6952.23 | 6952.23 | 6952.71 | 0.024388 | 5.55 | 19.82 | 20.87 | 1.00 |
| NCONFL-BGM | 4575.02 | DBPS 100-YR | 1200.00 | 6949.23 | 6953.74 | 6953.74 | 6955.00 | 0.016347 | 9.02 | 135.19 | 61.70 | 0.98 |
| NCONFL-BGM | 4575.02 | DBPS 2-YR | 110.00 | 6949.23 | 6950.79 | 6950.79 | 6951.25 | 0.024969 | 5.47 | 20.13 | 22.13 | 1.01 |
| NCONFL-BGM | 4524.43 | DBPS 100-YR | 1200.00 | 6948.09 | 6953.82 | | 6954.24 | 0.004089 | 5.23 | 235.79 | 90.37 | 0.51 |
| NCONFL-BGM | 4524.43 | DBPS 2-YR | 110.00 | 6948.09 | 6950.29 | | 6950.42 | 0.004996 | 2.94 | 37.39 | 31.15 | 0.47 |
| NCONFL-BGM | 4475.61 | DBPS 100-YR | 1200.00 | 6947.90 | 6952.60 | 6952.41 | 6953.73 | 0.014385 | 8.52 | 140.92 | 54.37 | 0.91 |
| NCONFL-BGM | 4475.61 | DBPS 2-YR | 110.00 | 6947.90 | 6949.31 | 6949.31 | 6949.79 | 0.024539 | 5.55 | 19.81 | 20.92 | 1.01 |
| NCONFL-BGM | 4424.53 | DBPS 100-YR | 1200.00 | 6946.40 | 6951.43 | 6951.43 | 6952.89 | 0.017385 | 9.68 | 124.01 | 43.35 | 1.01 |
| NCONFL-BGM | 4424.53 | DBPS 2-YR | 110.00 | 6946.40 | 6948.01 | 6948.01 | 6948.54 | 0.023821 | 5.81 | 18.93 | 18.15 | 1.00 |
| NCONFL-BGM | 4374.51 | DBPS 100-YR | 1200.00 | 6945.00 | 6948.73 | 6948.56 | 6949.89 | 0.013925 | 8.63 | 140.45 | 53.52 | 0.91 |
| NCONFL-BGM | 4374.51 | DBPS 2-YR | 110.00 | 6945.00 | 6946.23 | | 6946.40 | 0.008205 | 3.36 | 32.70 | 32.45 | 0.59 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total | Min Ch El | W.S. Elev | Crit W.S. | E.G. Elev | E.G. Slope | Vel Chnl | Flow Area | Top Width | Froude # Chl |
|------------|-----------|-------------|---------|-----------|-----------|-----------|-----------|------------|----------|-----------|-----------|--------------|
| | | | (cfs) | (ft) | (ft) | (ft) | (ft) | (ft/ft) | (ft/s) | (sq ft) | (ft) | |
| NCONFL-BGM | 4315.85 | DBPS 100-YR | 1200.00 | 6944.86 | 6948.68 | | 6949.22 | 0.005454 | 5.90 | 207.05 | 69.95 | 0.58 |
| NCONFL-BGM | 4315.85 | DBPS 2-YR | 110.00 | 6944.86 | 6945.97 | | 6946.05 | 0.003970 | 2.32 | 47.41 | 47.78 | 0.41 |
| NCONFL-BGM | 4261.63 | DBPS 100-YR | 1200.00 | 6944.70 | 6948.07 | 6947.51 | 6948.82 | 0.009107 | 6.97 | 173.35 | 65.15 | 0.74 |
| NCONFL-BGM | 4261.63 | DBPS 2-YR | 110.00 | 6944.70 | 6945.65 | | 6945.77 | 0.007009 | 2.80 | 39.27 | 45.70 | 0.53 |
| NCONFL-BGM | 4246.89 | DBPS 100-YR | 1200.00 | 6944.60 | 6947.45 | 6947.45 | 6948.60 | 0.018237 | 8.59 | 139.71 | 61.69 | 1.01 |
| NCONFL-BGM | 4246.89 | DBPS 2-YR | 110.00 | 6944.60 | 6945.27 | 6945.27 | 6945.57 | 0.029145 | 4.39 | 25.06 | 43.37 | 1.02 |
| NCONFL-BGM | 4227.84 | DBPS 100-YR | 1200.00 | 6939.95 | 6943.16 | | 6944.00 | 0.010392 | 7.36 | 164.99 | 63.96 | 0.78 |
| NCONFL-BGM | 4227.84 | DBPS 2-YR | 110.00 | 6939.95 | 6940.58 | 6940.58 | 6940.87 | 0.027710 | 4.32 | 25.47 | 43.49 | 0.99 |
| NCONFL-BGM | 4212.47 | DBPS 100-YR | 1200.00 | 6937.01 | 6943.63 | | 6943.75 | 0.000693 | 2.83 | 439.06 | 98.62 | 0.22 |
| NCONFL-BGM | 4212.47 | DBPS 2-YR | 110.00 | 6937.01 | 6938.61 | | 6938.65 | 0.001122 | 1.55 | 70.74 | 50.24 | 0.23 |
| NCONFL-BGM | 4166.74 | DBPS 100-YR | 1200.00 | 6936.87 | 6943.60 | | 6943.72 | 0.000671 | 2.74 | 439.27 | 107.03 | 0.22 |
| NCONFL-BGM | 4166.74 | DBPS 2-YR | 110.00 | 6936.87 | 6938.57 | | 6938.60 | 0.000907 | 1.44 | 76.25 | 51.66 | 0.21 |
| NCONFL-BGM | 4151.92 | DBPS 100-YR | 1200.00 | 6936.82 | 6943.59 | | 6943.71 | 0.000589 | 2.77 | 442.11 | 91.52 | 0.21 |
| NCONFL-BGM | 4151.92 | DBPS 2-YR | 110.00 | 6936.82 | 6938.56 | | 6938.59 | 0.000841 | 1.41 | 78.17 | 51.92 | 0.20 |
| NCONFL-BGM | 4136 | DBPS 100-YR | 1200.00 | 6936.78 | 6943.37 | 6939.74 | 6943.66 | 0.000118 | 4.34 | 307.69 | 84.42 | 0.30 |
| NCONFL-BGM | 4136 | DBPS 2-YR | 110.00 | 6936.78 | 6938.55 | 6937.39 | 6938.59 | 0.000082 | 1.50 | 74.12 | 42.66 | 0.20 |
| NCONFL-BGM | 4073 | | Culvert | | | | | | | | | |
| NCONFL-BGM | 4010.56 | DBPS 100-YR | 1200.00 | 6936.40 | 6940.03 | | 6941.01 | 0.008305 | 7.95 | 152.96 | 42.55 | 0.74 |
| NCONFL-BGM | 4010.56 | DBPS 2-YR | 110.00 | 6936.40 | 6937.56 | | 6937.65 | 0.003210 | 2.30 | 48.20 | 42.46 | 0.38 |
| NCONFL-BGM | 4001.57 | DBPS 100-YR | 1200.00 | 6936.38 | 6940.17 | | 6940.74 | 0.005492 | 6.07 | 198.52 | 62.65 | 0.59 |
| NCONFL-BGM | 4001.57 | DBPS 2-YR | 110.00 | 6936.38 | 6937.54 | | 6937.61 | 0.003432 | 2.23 | 49.40 | 47.45 | 0.38 |
| NCONFL-BGM | 3971.12 | DBPS 100-YR | 1200.00 | 6936.28 | 6939.95 | | 6940.55 | 0.006963 | 6.20 | 193.50 | 67.48 | 0.65 |
| NCONFL-BGM | 3971.12 | DBPS 2-YR | 110.00 | 6936.28 | 6937.43 | | 6937.51 | 0.003583 | 2.26 | 48.69 | 47.26 | 0.39 |
| NCONFL-BGM | 3934.28 | DBPS 100-YR | 1200.00 | 6936.17 | 6939.31 | | 6940.19 | 0.012132 | 7.51 | 159.89 | 63.60 | 0.83 |
| NCONFL-BGM | 3934.28 | DBPS 2-YR | 110.00 | 6936.17 | 6937.29 | | 6937.37 | 0.003887 | 2.32 | 47.50 | 47.24 | 0.41 |
| NCONFL-BGM | 3883.5 | DBPS 100-YR | 1200.00 | 6936.02 | 6939.22 | | 6939.61 | 0.006188 | 5.04 | 241.13 | 118.45 | 0.59 |
| NCONFL-BGM | 3883.5 | DBPS 2-YR | 110.00 | 6936.02 | 6937.03 | | 6937.13 | 0.005545 | 2.59 | 42.40 | 46.44 | 0.48 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|------------|-----------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| NCONFL-BGM | 3833.2 | DBPS 100-YR | 1200.00 | 6935.31 | 6938.74 | | 6939.24 | 0.008421 | 5.69 | 210.87 | 96.62 | 0.68 |
| NCONFL-BGM | 3833.2 | DBPS 2-YR | 110.00 | 6935.31 | 6936.56 | | 6936.72 | 0.013153 | 3.14 | 35.06 | 55.02 | 0.69 |
| NCONFL-BGM | 3782.77 | DBPS 100-YR | 1200.00 | 6934.35 | 6937.69 | 6937.69 | 6938.58 | 0.019623 | 7.59 | 158.16 | 88.65 | 1.00 |
| NCONFL-BGM | 3782.77 | DBPS 2-YR | 110.00 | 6934.35 | 6935.83 | | 6936.01 | 0.014971 | 3.42 | 32.18 | 48.89 | 0.74 |
| NCONFL-BGM | 3732.99 | DBPS 100-YR | 1200.00 | 6933.18 | 6936.33 | 6936.33 | 6937.18 | 0.019654 | 7.43 | 161.55 | 94.39 | 1.00 |
| NCONFL-BGM | 3732.99 | DBPS 2-YR | 110.00 | 6933.18 | 6934.75 | 6934.75 | 6934.96 | 0.032470 | 3.69 | 29.83 | 72.71 | 1.02 |
| NCONFL-BGM | 3682.83 | DBPS 100-YR | 1200.00 | 6931.90 | 6935.81 | | 6936.19 | 0.006725 | 4.93 | 243.29 | 117.45 | 0.60 |
| NCONFL-BGM | 3682.83 | DBPS 2-YR | 110.00 | 6931.90 | 6933.87 | | 6933.98 | 0.010711 | 2.62 | 42.05 | 74.61 | 0.61 |
| NCONFL-BGM | 3631.5 | DBPS 100-YR | 1200.00 | 6931.20 | 6934.97 | 6934.89 | 6935.62 | 0.018143 | 6.49 | 184.82 | 124.30 | 0.94 |
| NCONFL-BGM | 3631.5 | DBPS 2-YR | 110.00 | 6931.20 | 6933.03 | 6932.90 | 6933.27 | 0.017222 | 3.91 | 28.10 | 38.73 | 0.81 |
| NCONFL-BGM | 3582.8 | DBPS 100-YR | 1200.00 | 6930.58 | 6933.84 | 6933.84 | 6934.67 | 0.020613 | 7.29 | 164.53 | 101.99 | 1.01 |
| NCONFL-BGM | 3582.8 | DBPS 2-YR | 110.00 | 6930.58 | 6931.90 | 6931.90 | 6932.21 | 0.028607 | 4.45 | 24.71 | 41.10 | 1.01 |
| NCONFL-BGM | 3532.66 | DBPS 100-YR | 1200.00 | 6929.49 | 6933.04 | | 6933.48 | 0.008201 | 5.32 | 225.42 | 112.51 | 0.66 |
| NCONFL-BGM | 3532.66 | DBPS 2-YR | 110.00 | 6929.49 | 6930.91 | | 6931.09 | 0.015203 | 3.38 | 32.53 | 51.01 | 0.75 |
| NCONFL-BGM | 3482.57 | DBPS 100-YR | 1200.00 | 6928.80 | 6932.77 | | 6933.14 | 0.005015 | 4.88 | 245.95 | 96.60 | 0.54 |
| NCONFL-BGM | 3482.57 | DBPS 2-YR | 110.00 | 6928.80 | 6930.12 | | 6930.29 | 0.016471 | 3.32 | 33.18 | 56.91 | 0.77 |
| NCONFL-BGM | 3432.47 | DBPS 100-YR | 1200.00 | 6927.99 | 6931.58 | 6931.58 | 6932.63 | 0.018782 | 8.24 | 145.69 | 70.19 | 1.01 |
| NCONFL-BGM | 3432.47 | DBPS 2-YR | 110.00 | 6927.99 | 6929.48 | | 6929.66 | 0.010068 | 3.37 | 32.64 | 37.73 | 0.64 |
| NCONFL-BGM | 3382.53 | DBPS 100-YR | 1200.00 | 6927.47 | 6931.07 | 6930.84 | 6931.68 | 0.014362 | 6.27 | 191.53 | 114.43 | 0.85 |
| NCONFL-BGM | 3382.53 | DBPS 2-YR | 110.00 | 6927.47 | 6928.76 | 6928.65 | 6929.01 | 0.017373 | 3.97 | 27.72 | 37.87 | 0.82 |
| NCONFL-BGM | 3332.36 | DBPS 100-YR | 1200.00 | 6926.42 | 6929.91 | 6929.91 | 6930.82 | 0.019570 | 7.64 | 157.13 | 87.83 | 1.01 |
| NCONFL-BGM | 3332.36 | DBPS 2-YR | 110.00 | 6926.42 | 6927.57 | 6927.57 | 6927.92 | 0.027146 | 4.77 | 23.08 | 33.47 | 1.01 |
| NCONFL-BGM | 3282.15 | DBPS 100-YR | 1200.00 | 6924.78 | 6929.26 | | 6929.94 | 0.010289 | 6.61 | 181.52 | 77.40 | 0.76 |
| NCONFL-BGM | 3282.15 | DBPS 2-YR | 110.00 | 6924.78 | 6926.41 | | 6926.69 | 0.016573 | 4.26 | 25.81 | 30.44 | 0.82 |
| NCONFL-BGM | 3232.26 | DBPS 100-YR | 1200.00 | 6923.75 | 6928.61 | | 6929.40 | 0.010985 | 7.11 | 169.24 | 75.31 | 0.79 |
| NCONFL-BGM | 3232.26 | DBPS 2-YR | 110.00 | 6923.75 | 6925.53 | | 6925.86 | 0.016673 | 4.59 | 23.98 | 25.36 | 0.83 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total | Min Ch El | W.S. Elev | Crit W.S. | E.G. Elev | E.G. Slope | Vel Chnl | Flow Area | Top Width | Froude # Chl |
|------------|-----------|-------------|---------|-----------|-----------|-----------|-----------|------------|----------|-----------|-----------|--------------|
| | | | (cfs) | (ft) | (ft) | (ft) | (ft) | (ft/ft) | (ft/s) | (sq ft) | (ft) | |
| NCONFL-BGM | 3182.09 | DBPS 100-YR | 1200.00 | 6923.28 | 6927.46 | 6927.46 | 6928.66 | 0.018301 | 8.77 | 136.91 | 58.83 | 1.01 |
| NCONFL-BGM | 3182.09 | DBPS 2-YR | 110.00 | 6923.28 | 6924.88 | | 6925.14 | 0.011836 | 4.07 | 27.04 | 26.51 | 0.71 |
| NCONFL-BGM | 3132.01 | DBPS 100-YR | 1200.00 | 6923.15 | 6926.40 | 6926.40 | 6927.53 | 0.017492 | 8.54 | 141.36 | 70.01 | 0.99 |
| NCONFL-BGM | 3132.01 | DBPS 2-YR | 110.00 | 6923.15 | 6924.23 | | 6924.45 | 0.015590 | 3.75 | 29.32 | 40.15 | 0.77 |
| NCONFL-BGM | 3082.04 | DBPS 100-YR | 1200.00 | 6921.99 | 6925.25 | 6925.25 | 6926.35 | 0.018520 | 8.39 | 142.96 | 66.27 | 1.01 |
| NCONFL-BGM | 3082.04 | DBPS 2-YR | 110.00 | 6921.99 | 6923.11 | 6923.11 | 6923.41 | 0.029020 | 4.37 | 25.15 | 43.61 | 1.02 |
| NCONFL-BGM | 3032.09 | DBPS 100-YR | 1200.00 | 6921.56 | 6925.59 | | 6925.77 | 0.001926 | 3.48 | 349.72 | 124.02 | 0.35 |
| NCONFL-BGM | 3032.09 | DBPS 2-YR | 110.00 | 6921.56 | 6922.54 | | 6922.60 | 0.004201 | 1.99 | 55.15 | 72.88 | 0.40 |
| NCONFL-BGM | 2981.9 | DBPS 100-YR | 1200.00 | 6920.57 | 6924.58 | 6924.44 | 6925.49 | 0.014630 | 7.68 | 159.77 | 91.00 | 0.90 |
| NCONFL-BGM | 2981.9 | DBPS 2-YR | 110.00 | 6920.57 | 6921.88 | 6921.78 | 6922.20 | 0.018527 | 4.50 | 24.44 | 28.89 | 0.86 |
| NCONFL-BGM | 2931.64 | DBPS 100-YR | 1200.00 | 6919.84 | 6923.82 | 6923.82 | 6924.80 | 0.013066 | 8.14 | 165.48 | 97.46 | 0.88 |
| NCONFL-BGM | 2931.64 | DBPS 2-YR | 110.00 | 6919.84 | 6921.18 | | 6921.43 | 0.012203 | 3.98 | 27.65 | 28.74 | 0.71 |
| NCONFL-BGM | 2881.41 | DBPS 100-YR | 1200.00 | 6919.31 | 6922.77 | 6922.77 | 6923.68 | 0.013020 | 7.96 | 174.15 | 108.54 | 0.87 |
| NCONFL-BGM | 2881.41 | DBPS 2-YR | 110.00 | 6919.31 | 6920.19 | 6920.19 | 6920.55 | 0.026092 | 4.83 | 22.80 | 31.46 | 1.00 |
| NCONFL-BGM | 2831.54 | DBPS 100-YR | 1200.00 | 6917.96 | 6922.35 | | 6922.95 | 0.008562 | 6.27 | 204.93 | 111.93 | 0.70 |
| NCONFL-BGM | 2831.54 | DBPS 2-YR | 110.00 | 6917.96 | 6919.33 | | 6919.58 | 0.012884 | 4.05 | 27.19 | 28.69 | 0.73 |
| NCONFL-BGM | 2781.44 | DBPS 100-YR | 1200.00 | 6917.16 | 6921.43 | 6921.43 | 6922.42 | 0.011024 | 8.25 | 171.47 | 111.10 | 0.82 |
| NCONFL-BGM | 2781.44 | DBPS 2-YR | 110.00 | 6917.16 | 6918.42 | 6918.34 | 6918.78 | 0.019777 | 4.84 | 22.71 | 25.18 | 0.90 |
| NCONFL-BGM | 2731.38 | DBPS 100-YR | 1200.00 | 6915.84 | 6920.29 | 6920.29 | 6921.39 | 0.012911 | 8.68 | 154.74 | 86.78 | 0.88 |
| NCONFL-BGM | 2731.38 | DBPS 2-YR | 110.00 | 6915.84 | 6917.34 | 6917.29 | 6917.74 | 0.021640 | 5.10 | 21.57 | 23.65 | 0.94 |
| NCONFL-BGM | 2681.28 | DBPS 100-YR | 1200.00 | 6914.78 | 6919.24 | 6919.15 | 6920.22 | 0.016757 | 7.96 | 151.31 | 78.66 | 0.96 |
| NCONFL-BGM | 2681.28 | DBPS 2-YR | 110.00 | 6914.78 | 6916.41 | 6916.30 | 6916.75 | 0.017403 | 4.68 | 23.50 | 24.84 | 0.85 |
| NCONFL-BGM | 2631.19 | DBPS 100-YR | 1200.00 | 6913.71 | 6918.94 | 6918.94 | 6919.62 | 0.006974 | 7.06 | 235.25 | 208.76 | 0.66 |
| NCONFL-BGM | 2631.19 | DBPS 2-YR | 110.00 | 6913.71 | 6915.21 | 6915.21 | 6915.71 | 0.024890 | 5.66 | 19.45 | 20.21 | 1.02 |
| NCONFL-BGM | 2580.11 | DBPS 100-YR | 1200.00 | 6912.83 | 6917.63 | 6917.63 | 6918.40 | 0.008495 | 7.56 | 208.29 | 141.69 | 0.73 |
| NCONFL-BGM | 2580.11 | DBPS 2-YR | 110.00 | 6912.83 | 6914.43 | | 6914.74 | 0.013388 | 4.46 | 24.64 | 22.90 | 0.76 |
| NCONFL-BGM | 2531.06 | DBPS 100-YR | 1200.00 | 6912.38 | 6916.16 | 6916.16 | 6916.95 | 0.013012 | 7.59 | 192.32 | 137.70 | 0.86 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)


| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|------------|-----------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| NCONFL-BGM | 2531.06 | DBPS 2-YR | 110.00 | 6912.38 | 6913.73 | | 6914.01 | 0.016188 | 4.27 | 25.78 | 29.88 | 0.81 |
| NCONFL-BGM | 2481.04 | DBPS 100-YR | 1200.00 | 6911.54 | 6915.67 | | 6916.18 | 0.012690 | 5.75 | 208.84 | 129.22 | 0.80 |
| NCONFL-BGM | 2481.04 | DBPS 2-YR | 110.00 | 6911.54 | 6912.90 | 6912.76 | 6913.20 | 0.016146 | 4.36 | 25.22 | 28.17 | 0.81 |
| NCONFL-BGM | 2431.22 | DBPS 100-YR | 1200.00 | 6910.68 | 6914.65 | 6914.65 | 6915.53 | 0.011648 | 7.81 | 179.38 | 120.98 | 0.83 |
| NCONFL-BGM | 2431.22 | DBPS 2-YR | 110.00 | 6910.68 | 6911.78 | 6911.78 | 6912.19 | 0.025350 | 5.13 | 21.46 | 26.43 | 1.00 |
| NCONFL-BGM | 2380.91 | DBPS 100-YR | 1200.00 | 6907.81 | 6913.30 | 6913.30 | 6914.42 | 0.013530 | 8.57 | 149.99 | 89.62 | 0.89 |
| NCONFL-BGM | 2380.91 | DBPS 2-YR | 110.00 | 6907.81 | 6910.45 | | 6910.69 | 0.008500 | 3.87 | 28.44 | 23.03 | 0.61 |
| NCONFL-BGM | 2330.73 | DBPS 100-YR | 1200.00 | 6908.31 | 6912.27 | 6912.27 | 6913.11 | 0.019039 | 7.37 | 164.26 | 108.72 | 0.99 |
| NCONFL-BGM | 2330.73 | DBPS 2-YR | 110.00 | 6908.31 | 6909.93 | | 6910.17 | 0.012955 | 3.85 | 28.54 | 32.61 | 0.73 |
| NCONFL-BGM | 2280.56 | DBPS 100-YR | 1200.00 | 6908.18 | 6911.33 | 6911.33 | 6912.23 | 0.014125 | 7.91 | 173.49 | 112.17 | 0.90 |
| NCONFL-BGM | 2280.56 | DBPS 2-YR | 110.00 | 6908.18 | 6909.18 | | 6909.41 | 0.017247 | 3.91 | 28.13 | 39.07 | 0.81 |
| NCONFL-BGM | 2230.55 | DBPS 100-YR | 1200.00 | 6907.30 | 6910.39 | 6910.32 | 6911.16 | 0.017664 | 7.03 | 170.74 | 100.15 | 0.95 |
| NCONFL-BGM | 2230.55 | DBPS 2-YR | 110.00 | 6907.30 | 6908.16 | 6908.11 | 6908.44 | 0.022312 | 4.25 | 25.86 | 38.42 | 0.91 |
| NCONFL-BGM | 2180.47 | DBPS 100-YR | 1200.00 | 6906.18 | 6909.26 | 6909.26 | 6910.22 | 0.019370 | 7.85 | 152.95 | 81.40 | 1.01 |
| NCONFL-BGM | 2180.47 | DBPS 2-YR | 110.00 | 6906.18 | 6907.06 | 6907.01 | 6907.33 | 0.021988 | 4.19 | 26.26 | 39.49 | 0.91 |
| NCONFL-BGM | 2130.39 | DBPS 100-YR | 1200.00 | 6905.09 | 6907.91 | 6907.91 | 6908.89 | 0.019111 | 7.94 | 151.20 | 78.29 | 1.01 |
| NCONFL-BGM | 2130.39 | DBPS 2-YR | 110.00 | 6905.09 | 6905.90 | 6905.87 | 6906.15 | 0.024745 | 4.04 | 27.20 | 47.15 | 0.94 |
| NCONFL-BGM | 2080.32 | DBPS 100-YR | 1200.00 | 6903.79 | 6906.62 | 6906.59 | 6907.50 | 0.018384 | 7.51 | 159.74 | 87.36 | 0.98 |
| NCONFL-BGM | 2080.32 | DBPS 2-YR | 110.00 | 6903.79 | 6904.95 | | 6905.12 | 0.016687 | 3.30 | 33.29 | 58.19 | 0.77 |
| NCONFL-BGM | 2030.34 | DBPS 100-YR | 1200.00 | 6903.25 | 6906.14 | | 6906.72 | 0.010707 | 6.12 | 196.06 | 97.22 | 0.76 |
| NCONFL-BGM | 2030.34 | DBPS 2-YR | 110.00 | 6903.25 | 6904.33 | | 6904.44 | 0.010880 | 2.66 | 41.39 | 72.79 | 0.62 |
| NCONFL-BGM | 1980.26 | DBPS 100-YR | 1200.00 | 6902.93 | 6905.72 | | 6906.21 | 0.008794 | 5.60 | 214.34 | 104.82 | 0.69 |
| NCONFL-BGM | 1980.26 | DBPS 2-YR | 110.00 | 6902.93 | 6903.77 | | 6903.88 | 0.011700 | 2.69 | 40.83 | 74.29 | 0.64 |
| NCONFL-BGM | 1930.24 | DBPS 100-YR | 1200.00 | 6902.27 | 6905.37 | | 6905.78 | 0.007578 | 5.11 | 234.64 | 117.71 | 0.64 |
| NCONFL-BGM | 1930.24 | DBPS 2-YR | 110.00 | 6902.27 | 6903.20 | | 6903.32 | 0.010960 | 2.78 | 39.50 | 65.12 | 0.63 |
| NCONFL-BGM | 1880.22 | DBPS 100-YR | 1200.00 | 6901.77 | 6904.99 | | 6905.40 | 0.007648 | 5.11 | 234.92 | 118.90 | 0.64 |
| NCONFL-BGM | 1880.22 | DBPS 2-YR | 110.00 | 6901.77 | 6902.76 | | 6902.87 | 0.007330 | 2.62 | 41.92 | 55.85 | 0.53 |

HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|------------|-----------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| NCONFL-BGM | 1829.99 | DBPS 100-YR | 1200.00 | 6901.20 | 6903.92 | 6903.92 | 6904.77 | 0.019997 | 7.40 | 162.16 | 96.78 | 1.01 |
| NCONFL-BGM | 1829.99 | DBPS 2-YR | 110.00 | 6901.20 | 6902.00 | 6901.96 | 6902.26 | 0.023055 | 4.04 | 27.20 | 44.74 | 0.91 |
| NCONFL-BGM | 1779.84 | DBPS 100-YR | 1200.00 | 6900.25 | 6902.86 | 6902.86 | 6903.71 | 0.019915 | 7.37 | 162.83 | 97.44 | 1.01 |
| NCONFL-BGM | 1779.84 | DBPS 2-YR | 110.00 | 6900.25 | 6901.04 | | 6901.24 | 0.017446 | 3.56 | 30.92 | 49.99 | 0.80 |
| NCONFL-BGM | 1730.05 | DBPS 100-YR | 1200.00 | 6899.75 | 6902.45 | | 6902.86 | 0.010043 | 5.11 | 234.78 | 145.68 | 0.71 |
| NCONFL-BGM | 1730.05 | DBPS 2-YR | 110.00 | 6899.75 | 6900.73 | | 6900.80 | 0.004667 | 2.11 | 52.18 | 68.83 | 0.43 |
| NCONFL-BGM | 1680.09 | DBPS 100-YR | 1200.00 | 6899.58 | 6902.01 | | 6902.35 | 0.009515 | 4.67 | 257.19 | 175.87 | 0.68 |
| NCONFL-BGM | 1680.09 | DBPS 2-YR | 110.00 | 6899.58 | 6900.41 | | 6900.49 | 0.008215 | 2.32 | 47.44 | 82.95 | 0.54 |
| NCONFL-BGM | 1630.18 | DBPS 100-YR | 1200.00 | 6898.99 | 6901.62 | | 6901.91 | 0.007632 | 4.42 | 279.28 | 180.86 | 0.62 |
| NCONFL-BGM | 1630.18 | DBPS 2-YR | 110.00 | 6898.99 | 6900.21 | | 6900.25 | 0.002938 | 1.55 | 72.45 | 109.71 | 0.33 |
| NCONFL-BGM | 1579.72 | DBPS 100-YR | 1200.00 | 6898.29 | 6900.75 | 6900.75 | 6901.26 | 0.024561 | 5.71 | 210.12 | 216.11 | 1.02 |
| NCONFL-BGM | 1579.72 | DBPS 2-YR | 110.00 | 6898.29 | 6899.70 | 6899.70 | 6899.88 | 0.034904 | 3.39 | 32.41 | 94.69 | 1.02 |
| NCONFL-BGM | 1529.44 | DBPS 100-YR | 1200.00 | 6897.87 | 6899.75 | 6899.59 | 6900.16 | 0.015690 | 5.11 | 234.64 | 203.58 | 0.84 |
| NCONFL-BGM | 1529.44 | DBPS 2-YR | 110.00 | 6897.87 | 6898.52 | | 6898.62 | 0.015562 | 2.54 | 43.25 | 106.37 | 0.70 |
| NCONFL-BGM | 1479.58 | DBPS 100-YR | 1200.00 | 6897.28 | 6898.98 | | 6899.38 | 0.015545 | 5.04 | 238.17 | 209.83 | 0.83 |
| NCONFL-BGM | 1479.58 | DBPS 2-YR | 110.00 | 6897.28 | 6897.94 | | 6898.00 | 0.009845 | 1.99 | 55.23 | 139.07 | 0.56 |
| NCONFL-BGM | 1429.4 | DBPS 100-YR | 1200.00 | 6896.36 | 6898.38 | | 6898.68 | 0.011352 | 4.48 | 276.02 | 238.21 | 0.72 |
| NCONFL-BGM | 1429.4 | DBPS 2-YR | 110.00 | 6896.36 | 6897.19 | | 6897.30 | 0.020221 | 2.71 | 40.65 | 113.38 | 0.79 |
| NCONFL-BGM | 1379.19 | DBPS 100-YR | 1200.00 | 6894.94 | 6898.11 | | 6898.30 | 0.004586 | 3.66 | 342.88 | 192.20 | 0.49 |
| NCONFL-BGM | 1379.19 | DBPS 2-YR | 110.00 | 6894.94 | 6895.91 | 6895.91 | 6896.18 | 0.023867 | 4.24 | 27.75 | 57.40 | 0.94 |
| NCONFL-BGM | 1329.11 | DBPS 100-YR | 1200.00 | 6893.53 | 6896.94 | 6896.94 | 6897.82 | 0.018928 | 7.55 | 159.91 | 99.41 | 0.99 |
| NCONFL-BGM | 1329.11 | DBPS 2-YR | 110.00 | 6893.53 | 6894.47 | 6894.47 | 6894.85 | 0.025809 | 4.96 | 22.18 | 29.07 | 1.00 |
| NCONFL-BGM | 1279.06 | DBPS 100-YR | 1200.00 | 6889.13 | 6893.49 | | 6894.18 | 0.012935 | 6.68 | 179.69 | 89.18 | 0.83 |
| NCONFL-BGM | 1279.06 | DBPS 2-YR | 110.00 | 6889.13 | 6890.54 | | 6890.72 | 0.007497 | 3.44 | 31.98 | 28.42 | 0.57 |
| NCONFL-BGM | 1228.98 | DBPS 100-YR | 1200.00 | 6888.78 | 6892.87 | 6892.47 | 6893.53 | 0.012767 | 6.53 | 183.66 | 93.67 | 0.82 |
| NCONFL-BGM | 1228.98 | DBPS 2-YR | 110.00 | 6888.78 | 6890.20 | | 6890.35 | 0.006846 | 3.15 | 34.91 | 33.21 | 0.54 |


HEC-RAS Plan: Phase 1 River: UT_BSC2 Reach: NCONFL-BGM (Continued)

| Reach | River Sta | Profile | Q Total (cfs) | Min Ch El (ft) | W.S. Elev (ft) | Crit W.S. (ft) | E.G. Elev (ft) | E.G. Slope (ft/ft) | Vel Chnl (ft/s) | Flow Area (sq ft) | Top Width (ft) | Froude # Chl |
|------------|-----------|-------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------|--------------------|----------------------|-------------------|--------------|
| NCONFL-BGM | 1178.9 | DBPS 100-YR | 1200.00 | 6888.27 | 6891.67 | 6891.67 | 6892.72 | 0.019273 | 8.20 | 146.30 | 70.62 | 1.00 |
| NCONFL-BGM | 1178.9 | DBPS 2-YR | 110.00 | 6888.27 | 6889.36 | 6889.36 | 6889.73 | 0.026689 | 4.85 | 22.69 | 31.58 | 1.01 |
| NCONFL-BGM | 1128.6 | DBPS 100-YR | 1200.00 | 6885.25 | 6889.22 | | 6889.51 | 0.003936 | 4.30 | 279.14 | 110.91 | 0.48 |
| NCONFL-BGM | 1128.6 | DBPS 2-YR | 110.00 | 6885.25 | 6886.37 | | 6886.50 | 0.010484 | 2.86 | 38.41 | 58.67 | 0.62 |
| NCONFL-BGM | 1078.47 | DBPS 100-YR | 1200.00 | 6884.72 | 6888.98 | | 6889.31 | 0.003636 | 4.61 | 260.46 | 87.59 | 0.47 |
| NCONFL-BGM | 1078.47 | DBPS 2-YR | 110.00 | 6884.72 | 6885.91 | | 6886.02 | 0.008280 | 2.75 | 40.04 | 54.51 | 0.57 |
| NCONFL-BGM | 1028.62 | DBPS 100-YR | 1200.00 | 6884.18 | 6888.65 | | 6889.09 | 0.004871 | 5.37 | 223.44 | 74.12 | 0.55 |
| NCONFL-BGM | 1028.62 | DBPS 2-YR | 110.00 | 6884.18 | 6885.28 | 6885.13 | 6885.49 | 0.014281 | 3.64 | 30.19 | 40.46 | 0.74 |
| NCONFL-BGM | 1000 | DBPS 100-YR | 1200.00 | 6883.24 | 6887.00 | 6887.00 | 6888.56 | 0.017487 | 10.04 | 119.56 | 38.69 | 1.01 |
| NCONFL-BGM | 1000 | DBPS 2-YR | 110.00 | 6883.24 | 6884.17 | 6884.16 | 6884.54 | 0.025114 | 4.84 | 22.71 | 29.92 | 0.98 |

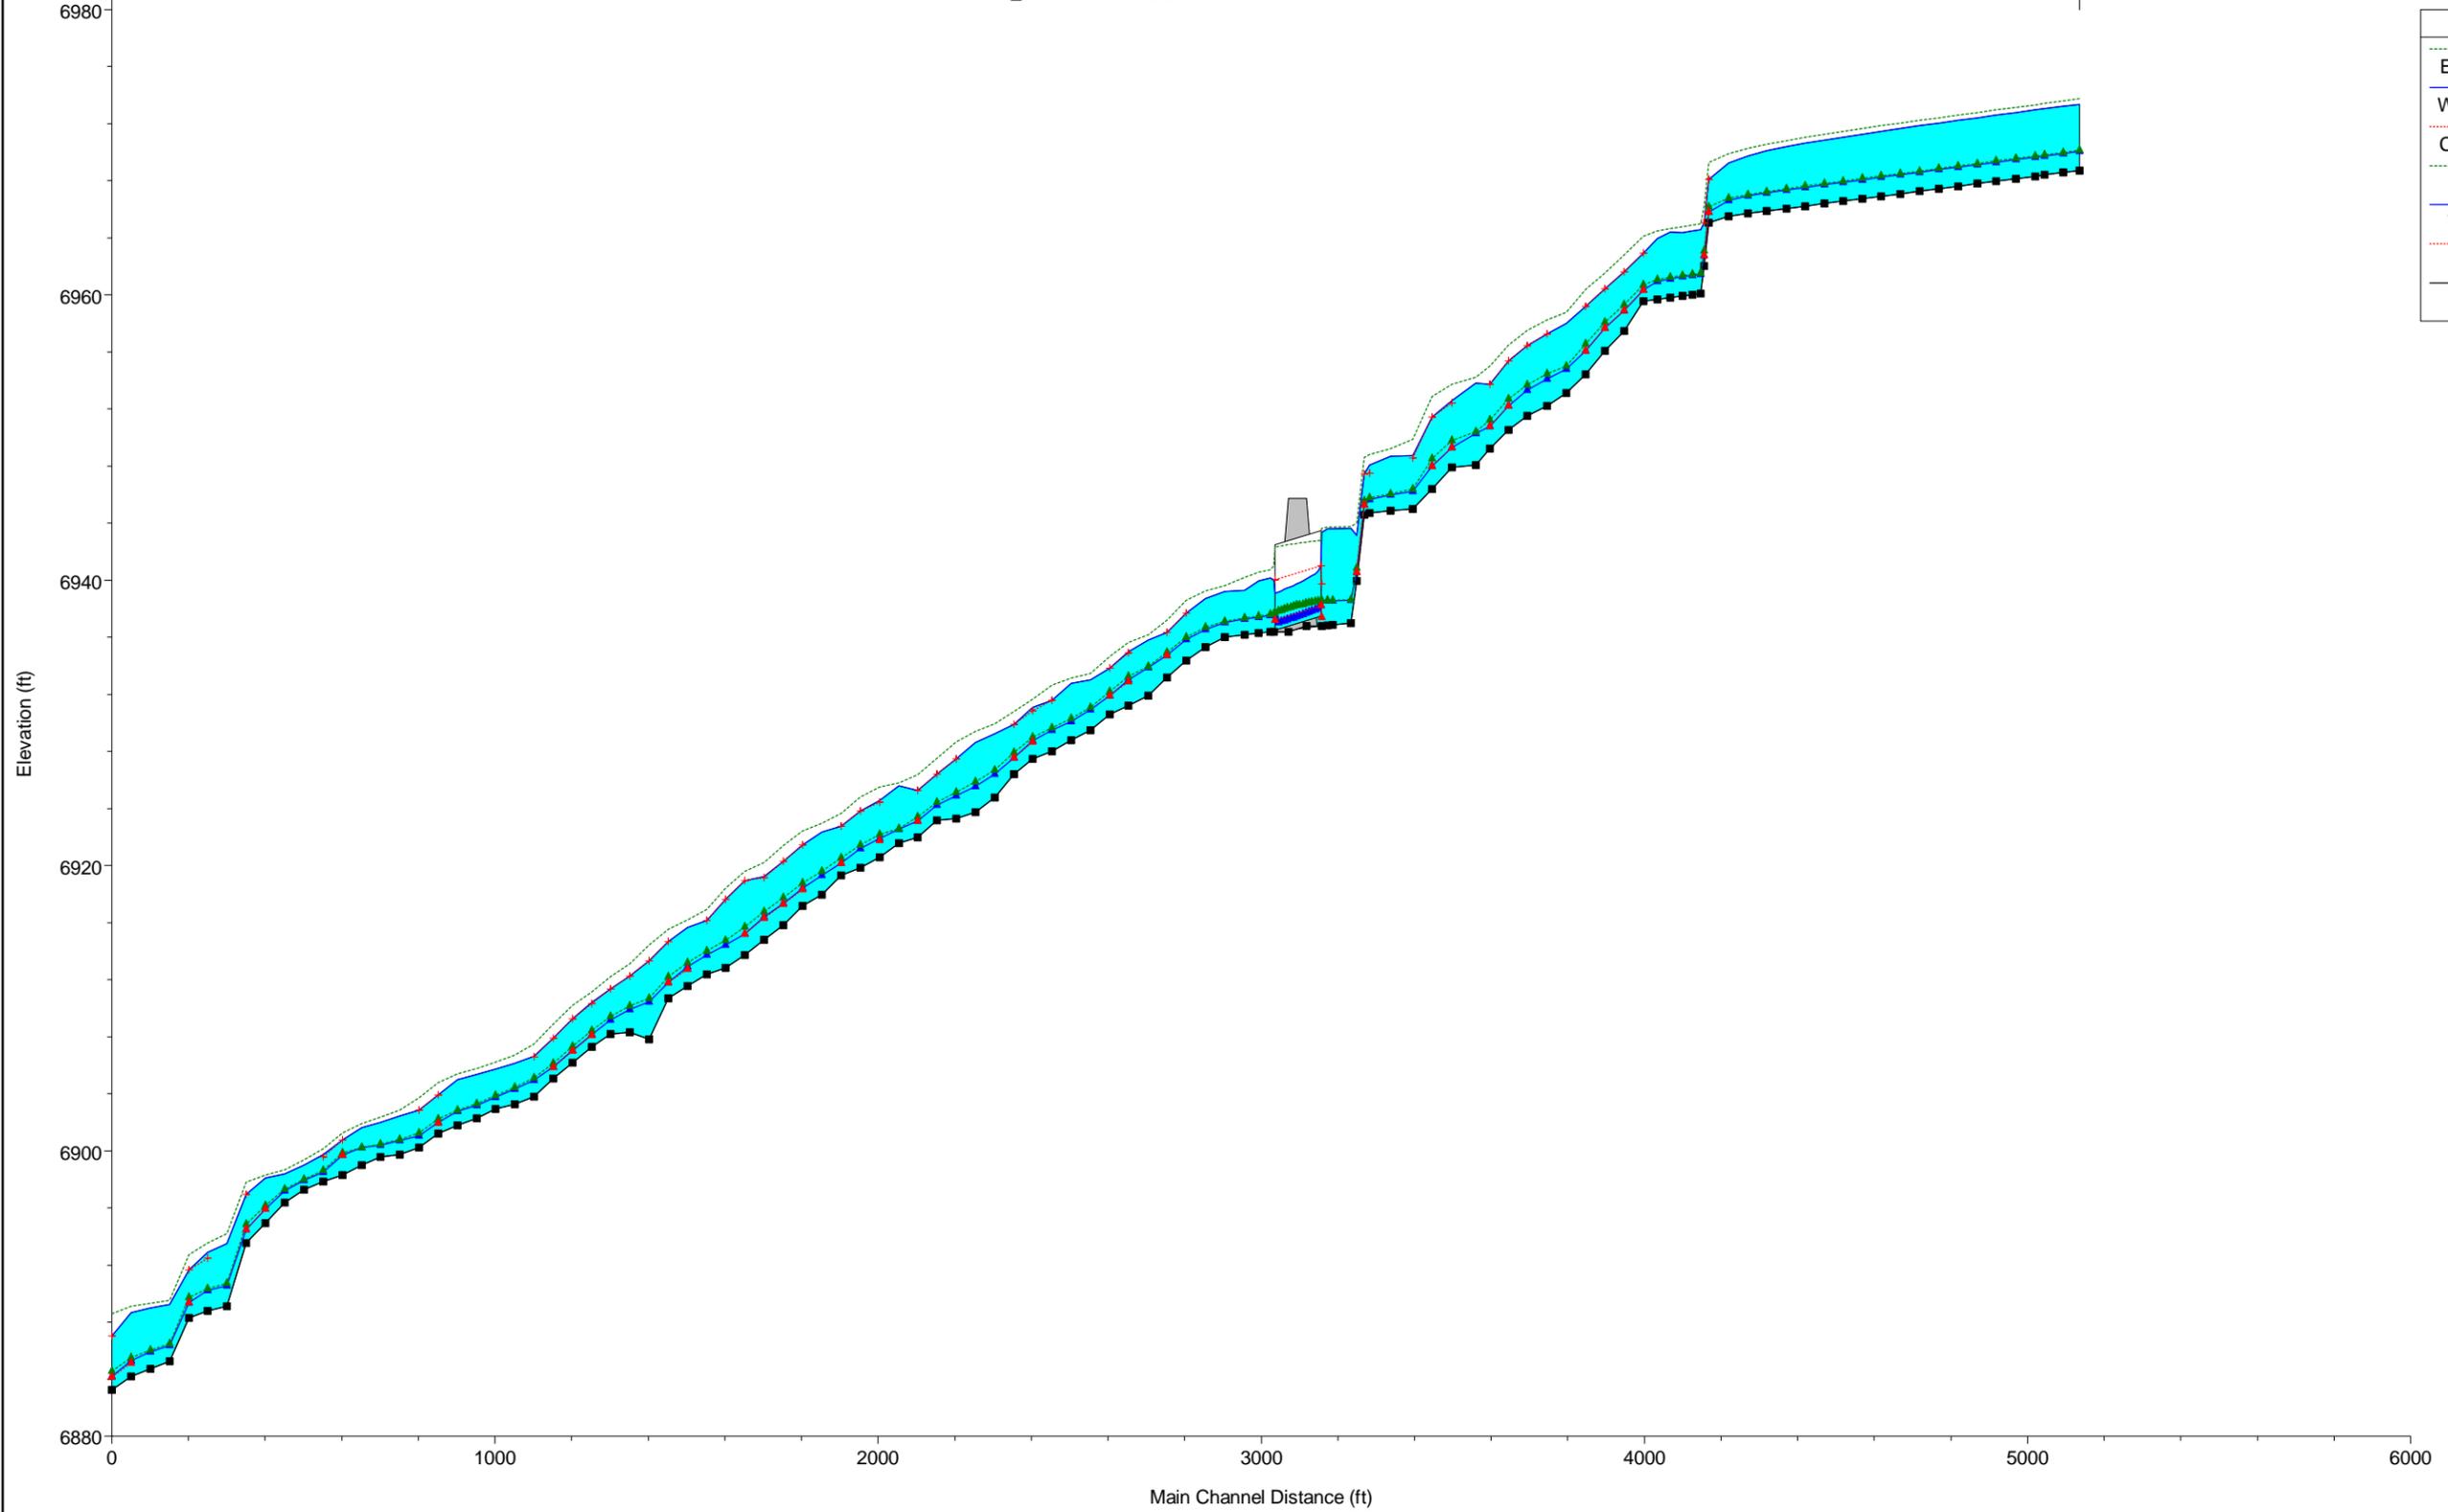


| Legend | |
|------------------|---------------------------------------|
| EG DBPS 100-YR | --- (dotted line) |
| WS DBPS 100-YR | — (solid line) |
| Crit DBPS 100-YR | --- (dotted line) |
| EG DBPS 2-YR | --- (dotted line) |
| WS DBPS 2-YR | — (solid line) |
| Crit DBPS 2-YR | --- (dotted line) |
| Ground | --- (dashed line with square markers) |



HEC-RAS Model Plan: Phase 1 10/21/2019

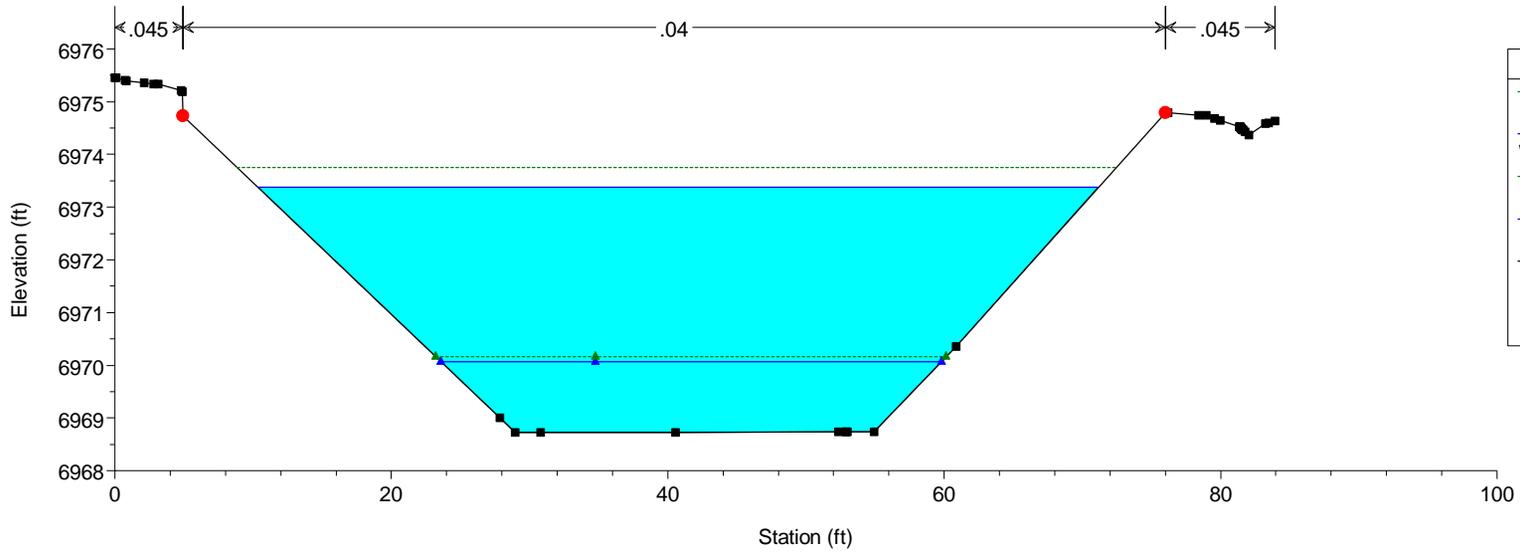



HEC-RAS Model Plan: Phase 1 10/21/2019

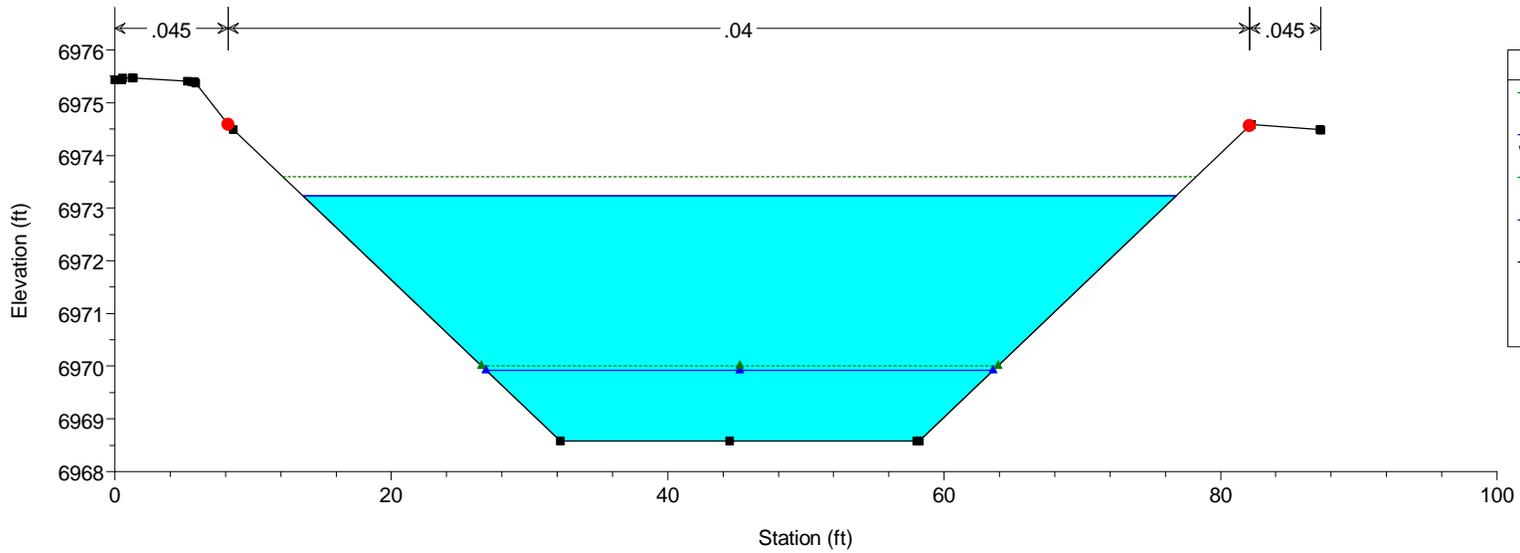


HEC-RAS Model Plan: Phase 1 10/21/2019

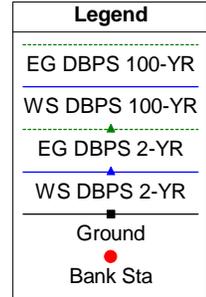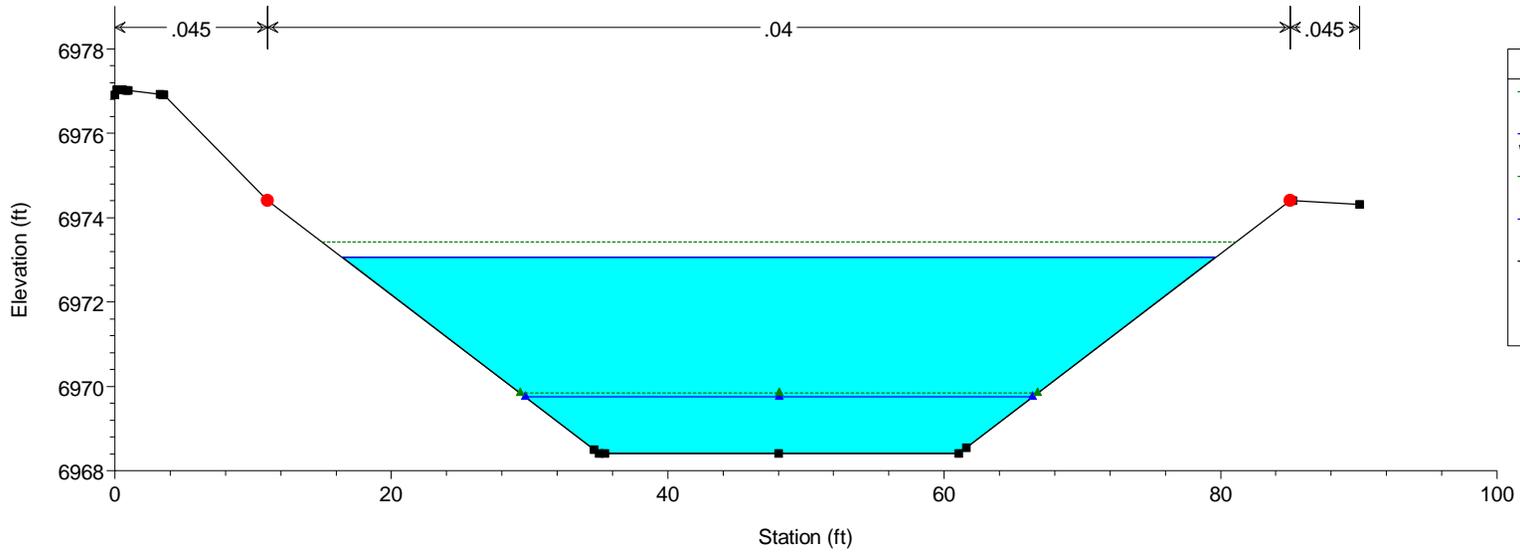


HEC-RAS Model Plan: Phase 1 10/21/2019

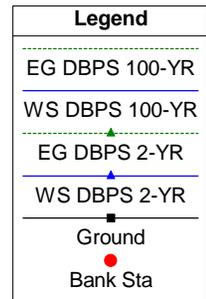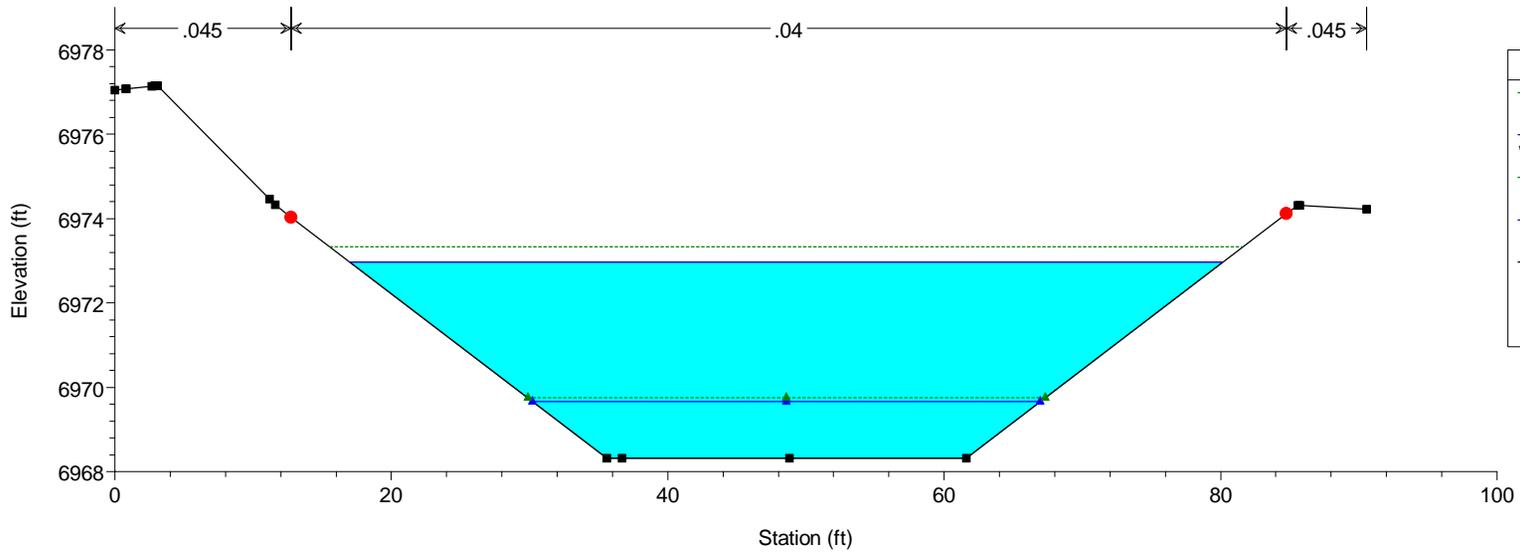



HEC-RAS Model Plan: Phase 1 10/21/2019

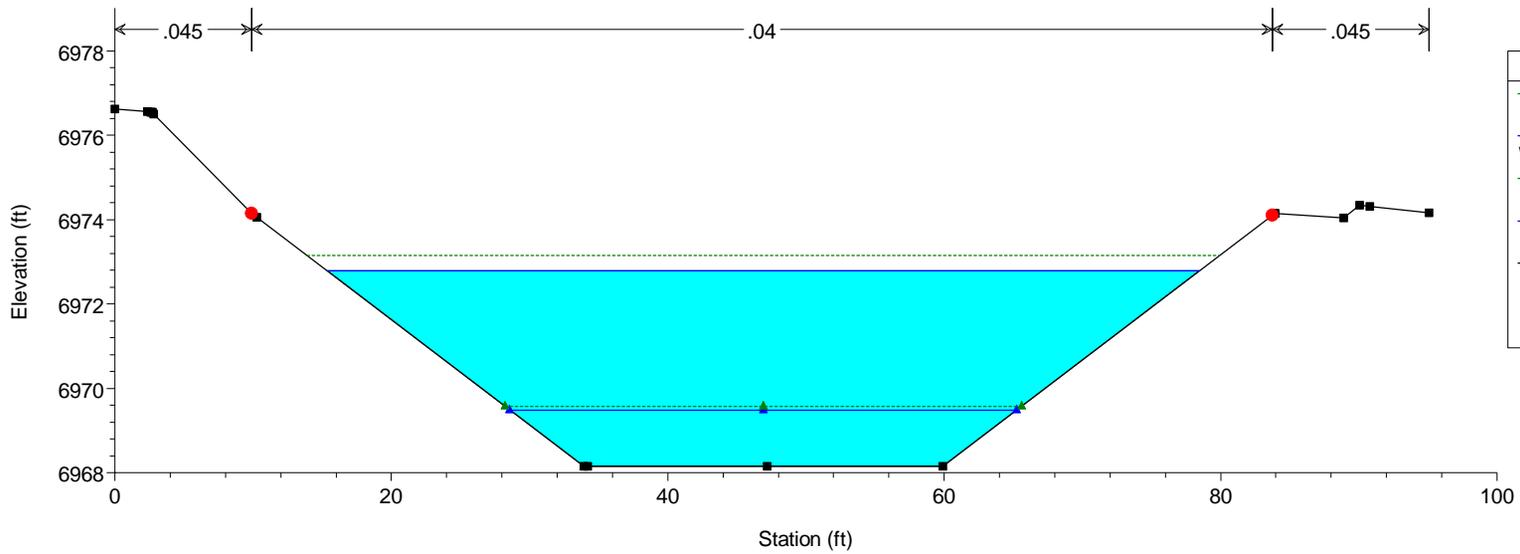



HEC-RAS Model Plan: Phase 1 10/21/2019

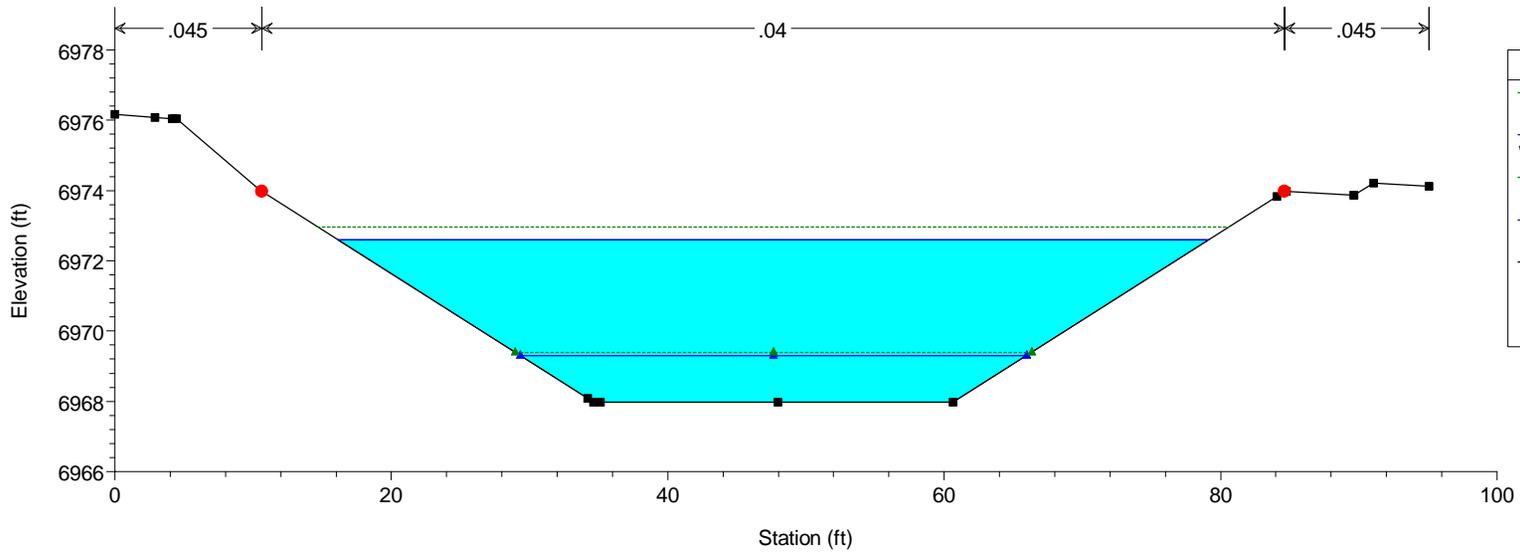



HEC-RAS Model Plan: Phase 1 10/21/2019

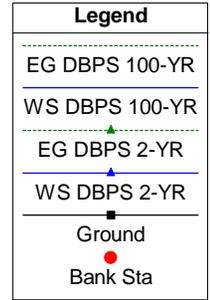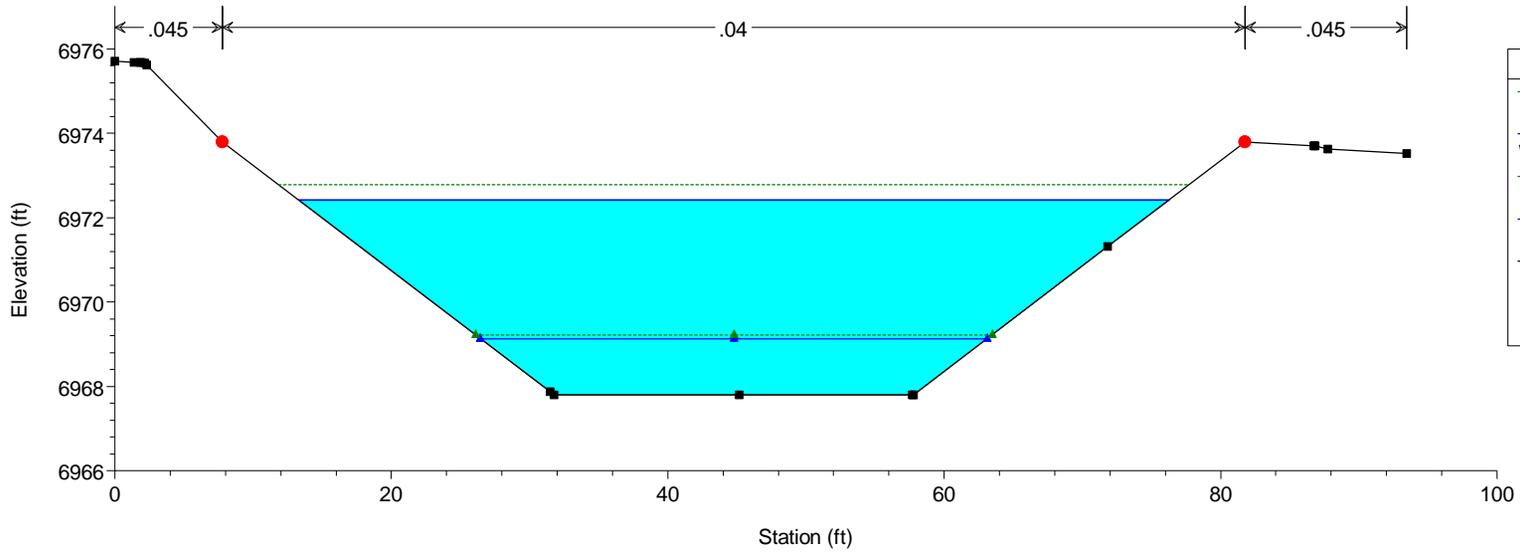



HEC-RAS Model Plan: Phase 1 10/21/2019

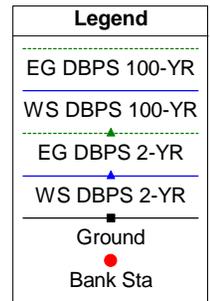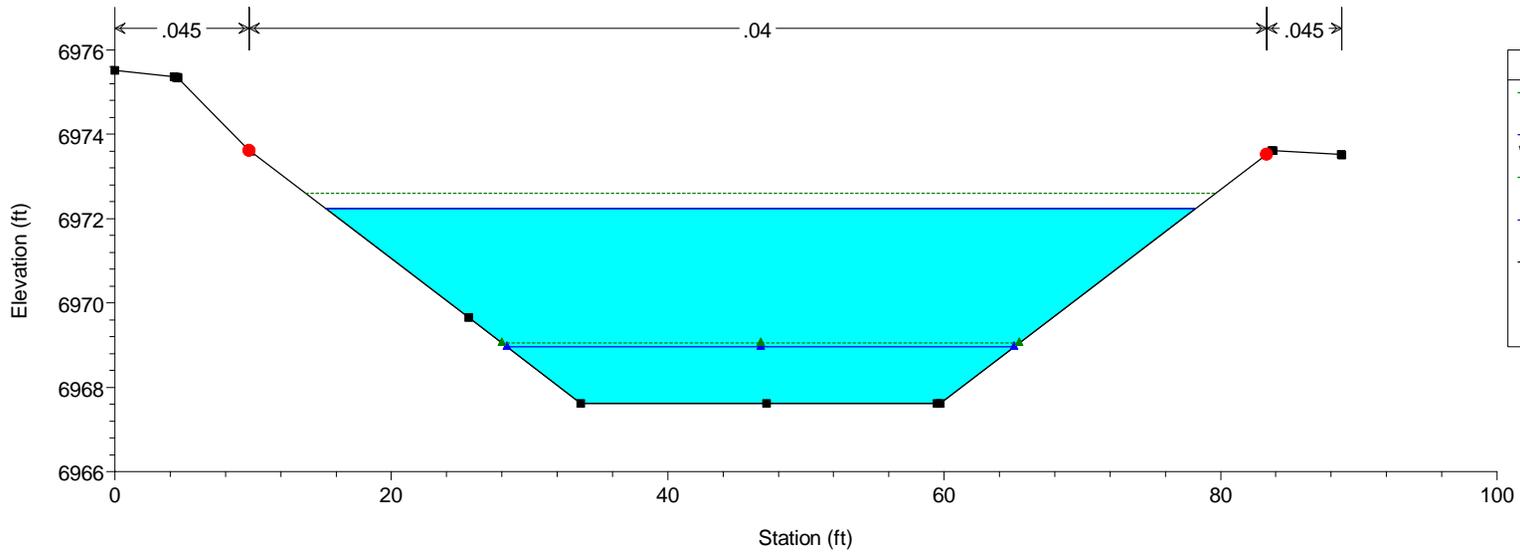


HEC-RAS Model Plan: Phase 1 10/21/2019

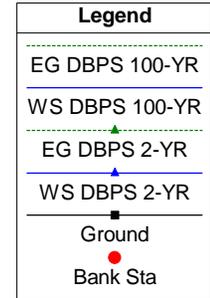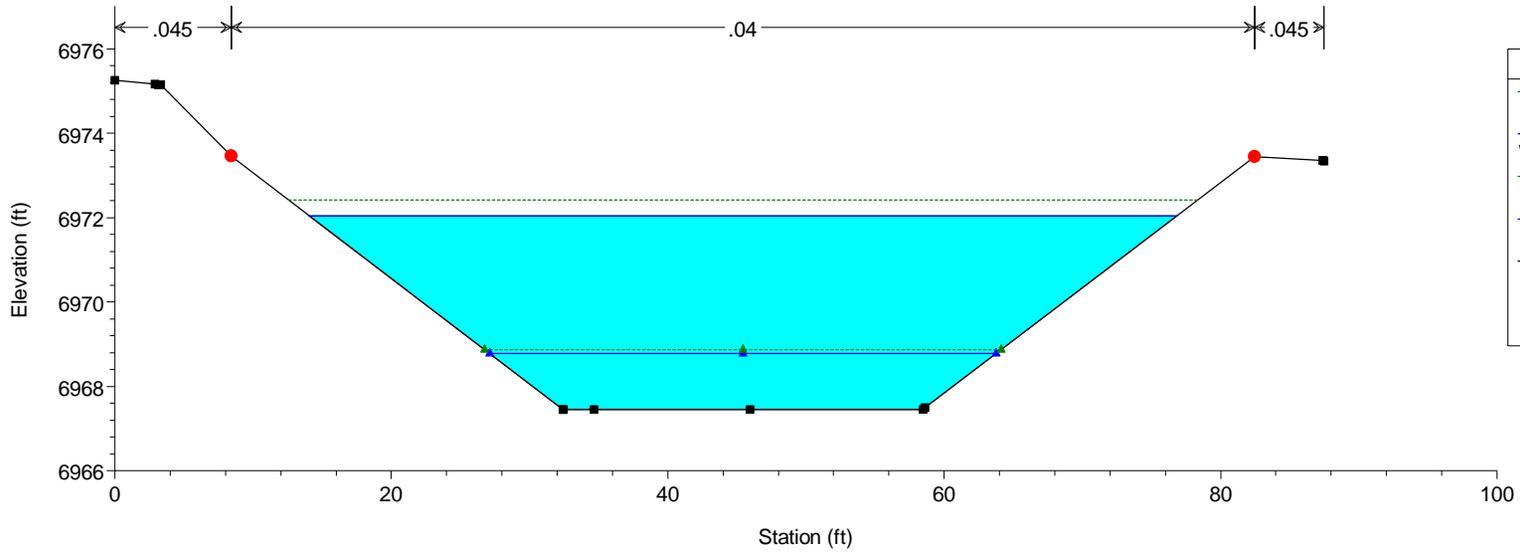



HEC-RAS Model Plan: Phase 1 10/21/2019

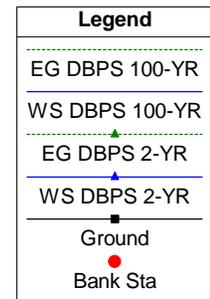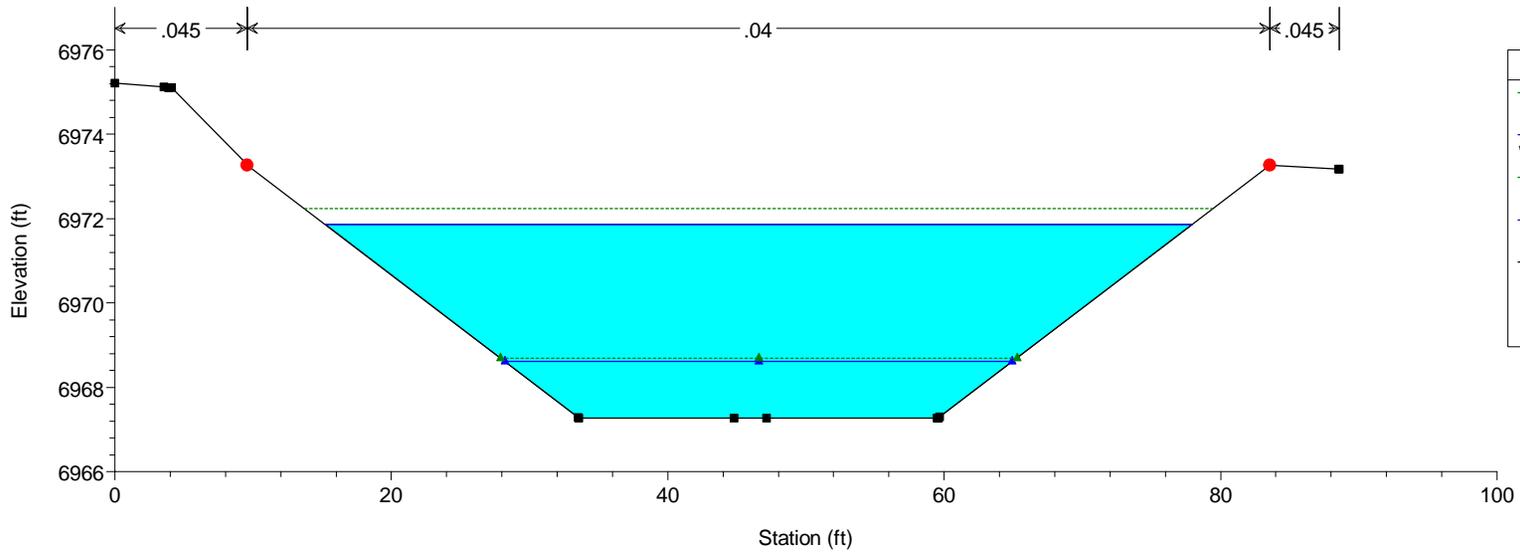



HEC-RAS Model Plan: Phase 1 10/21/2019

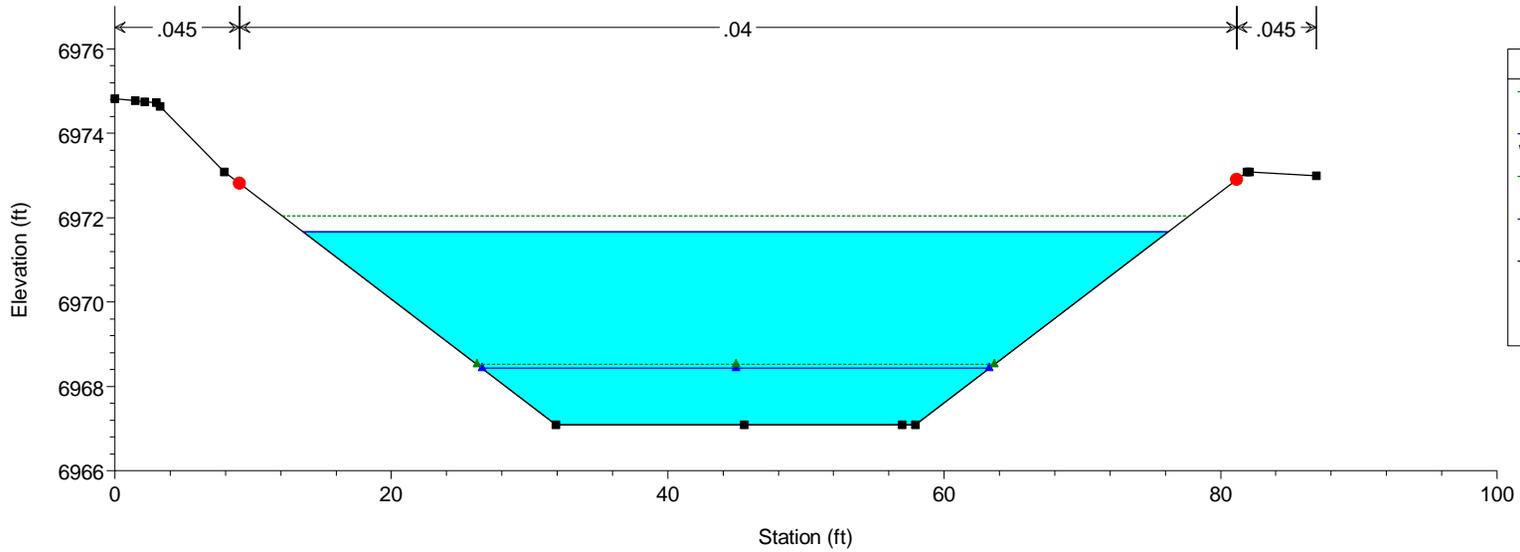



HEC-RAS Model Plan: Phase 1 10/21/2019

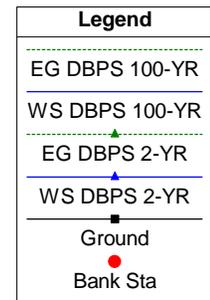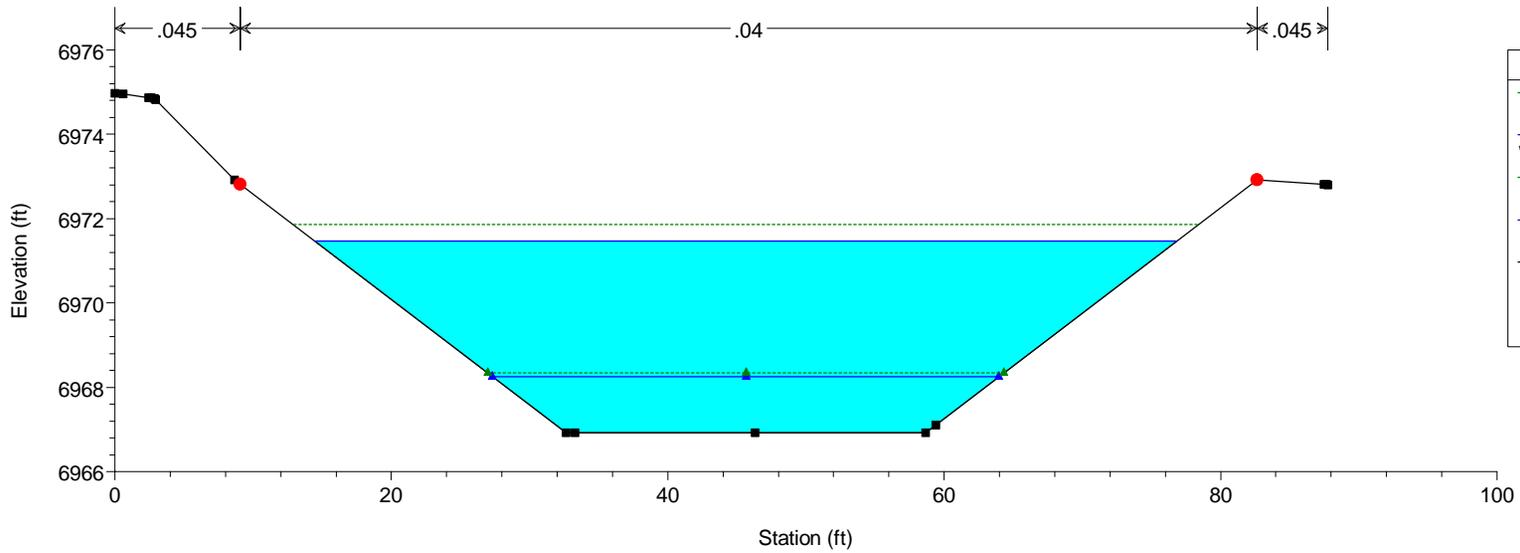



HEC-RAS Model Plan: Phase 1 10/21/2019

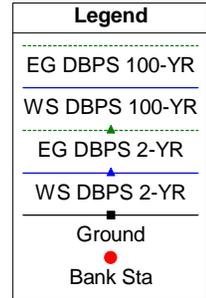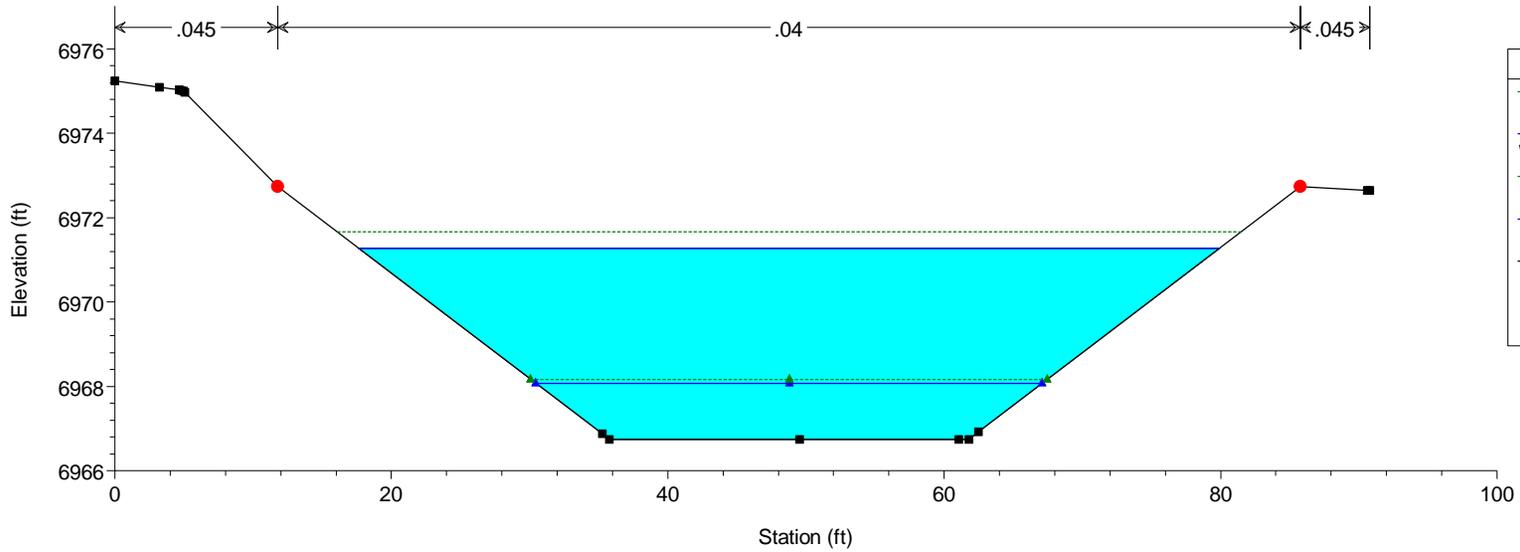



HEC-RAS Model Plan: Phase 1 10/21/2019

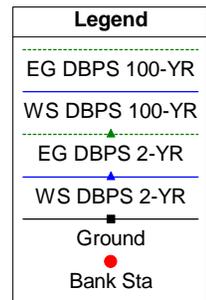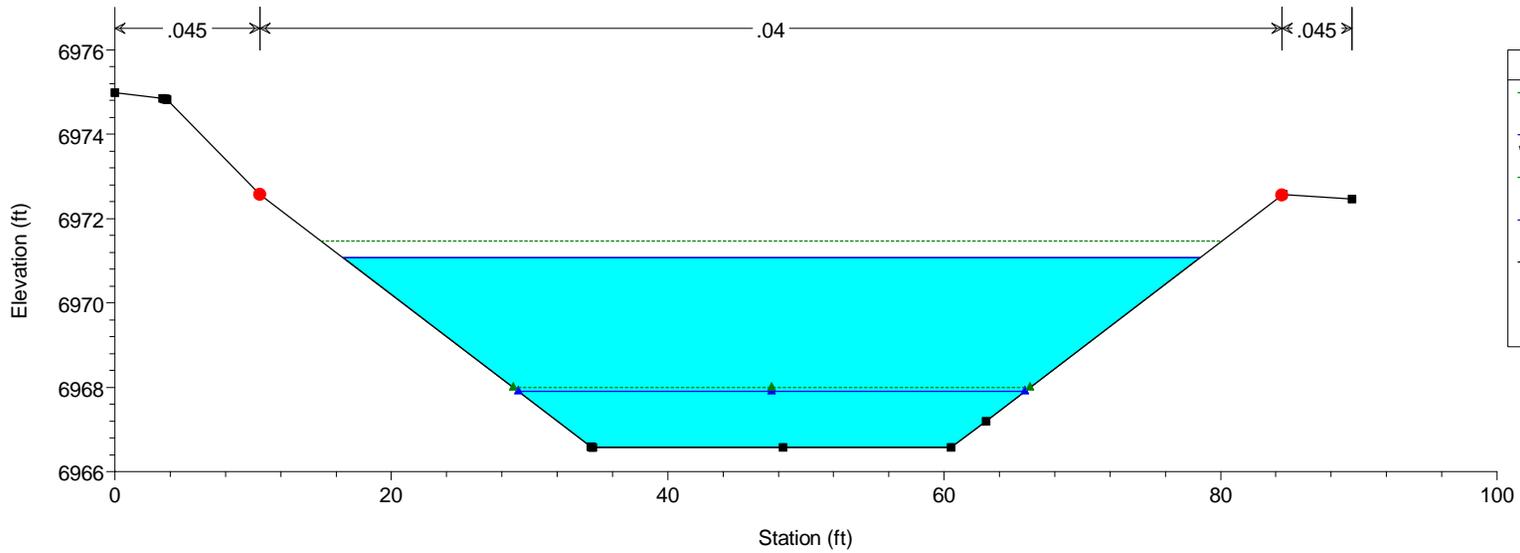


HEC-RAS Model Plan: Phase 1 10/21/2019

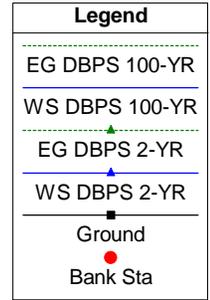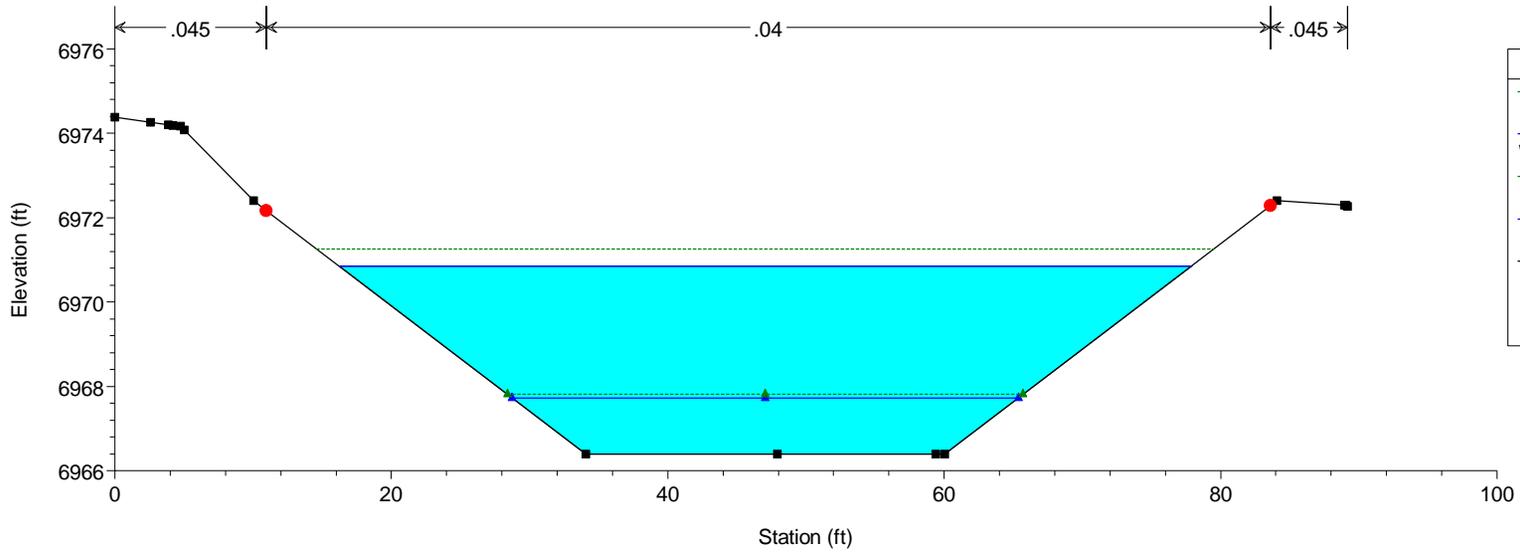


HEC-RAS Model Plan: Phase 1 10/21/2019

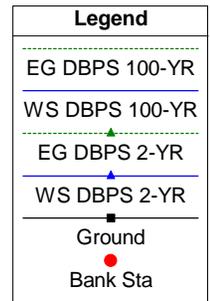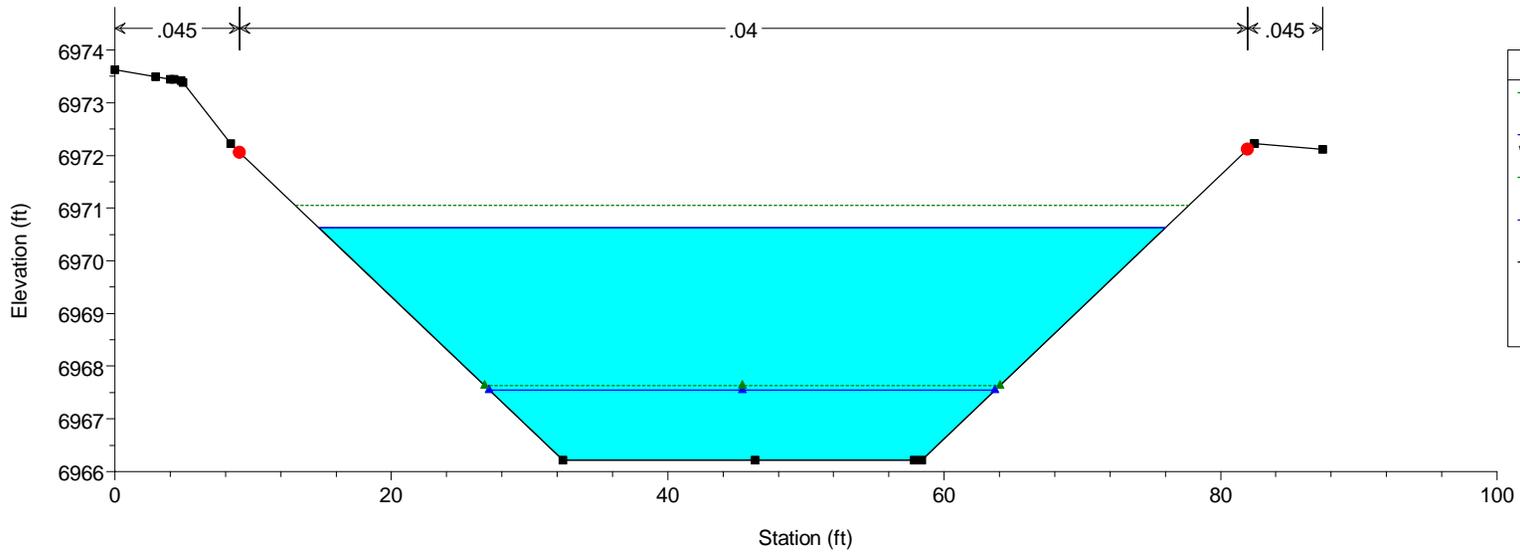



HEC-RAS Model Plan: Phase 1 10/21/2019

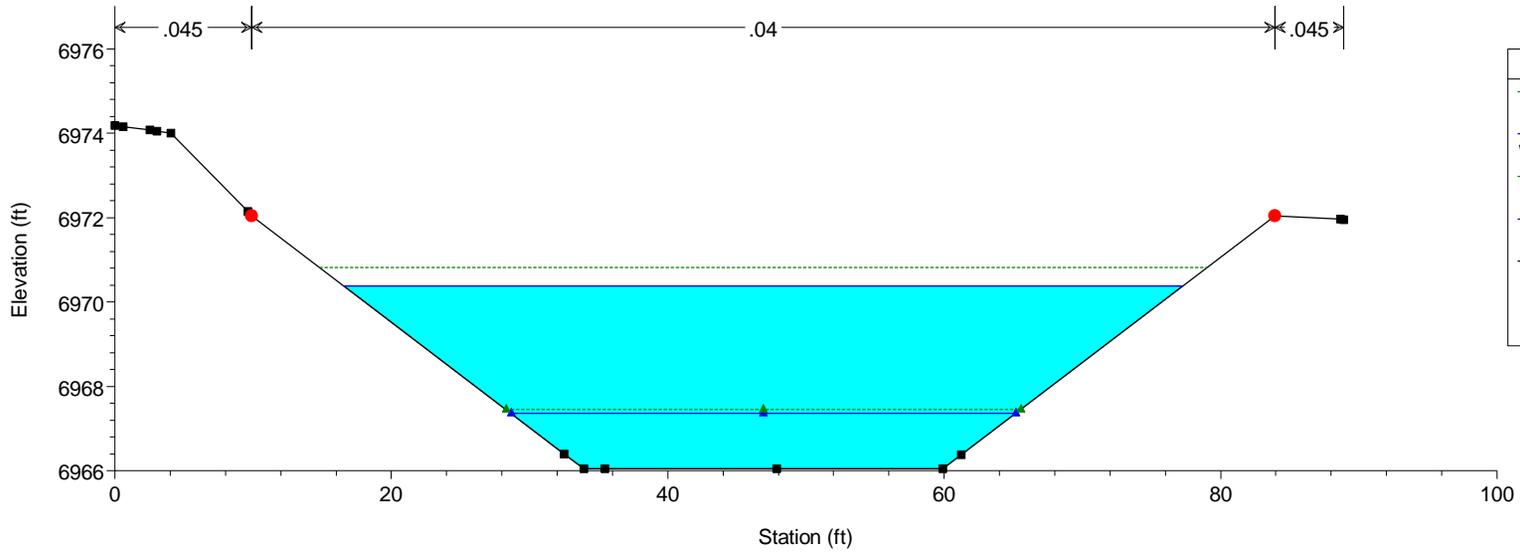



HEC-RAS Model Plan: Phase 1 10/21/2019

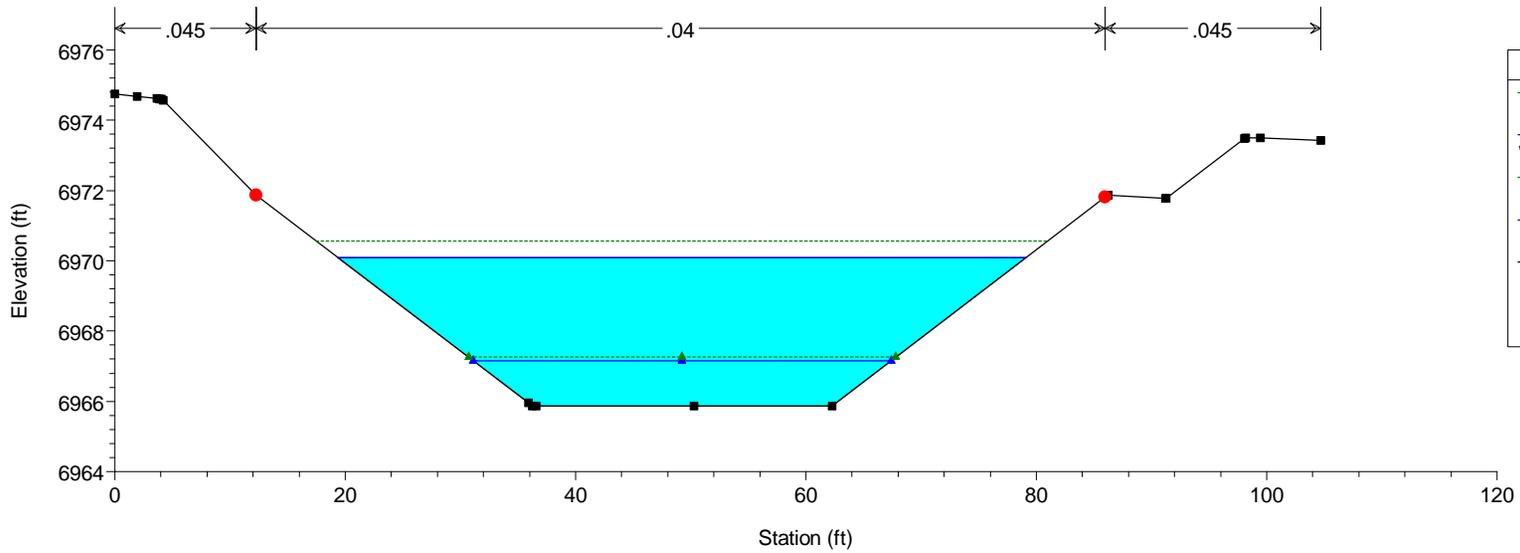


HEC-RAS Model Plan: Phase 1 10/21/2019

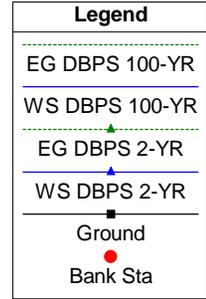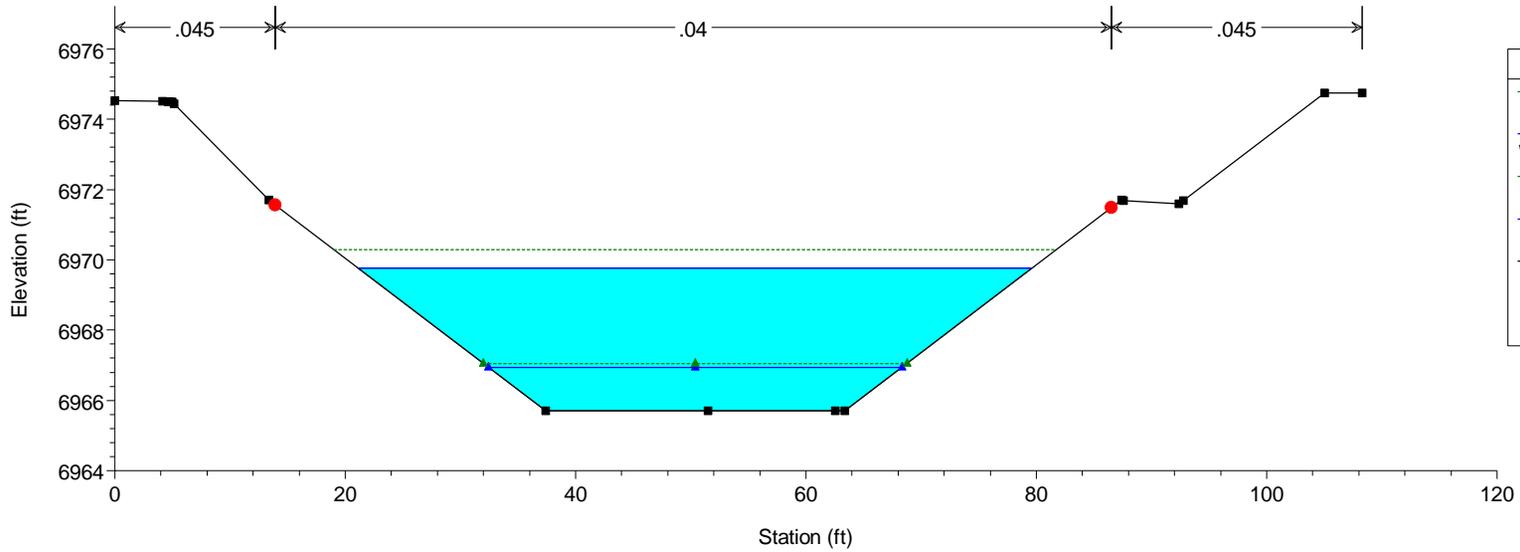


HEC-RAS Model Plan: Phase 1 10/21/2019

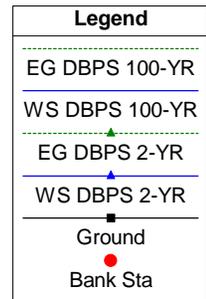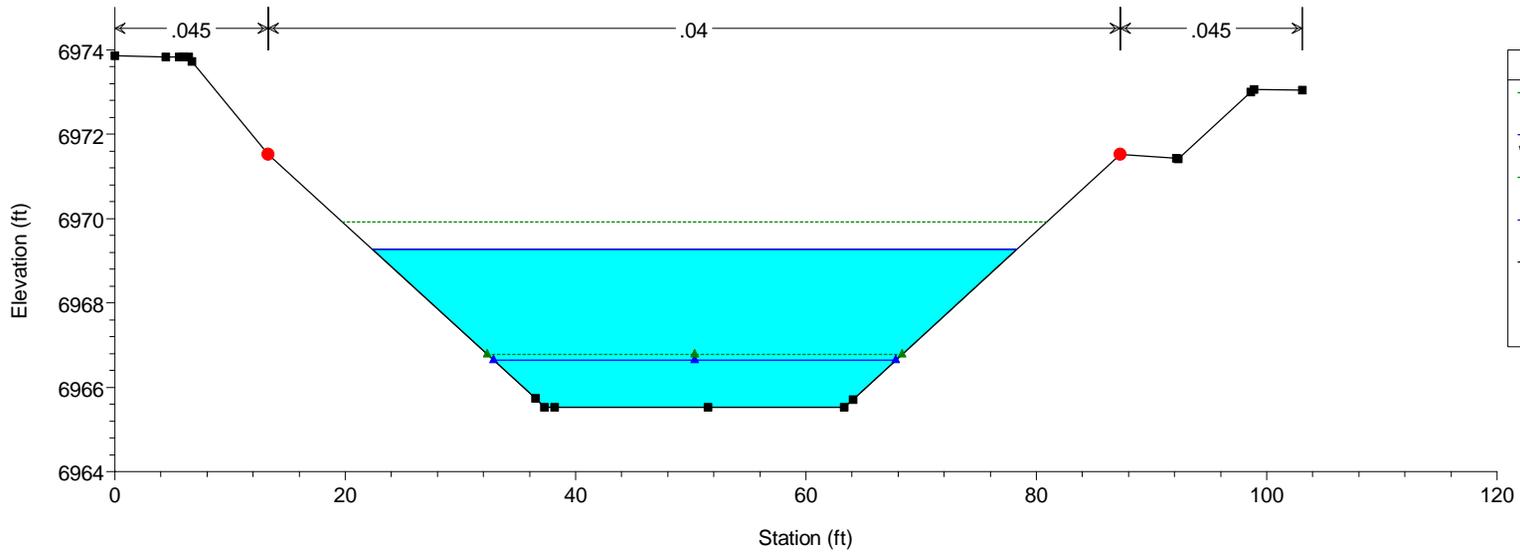


HEC-RAS Model Plan: Phase 1 10/21/2019

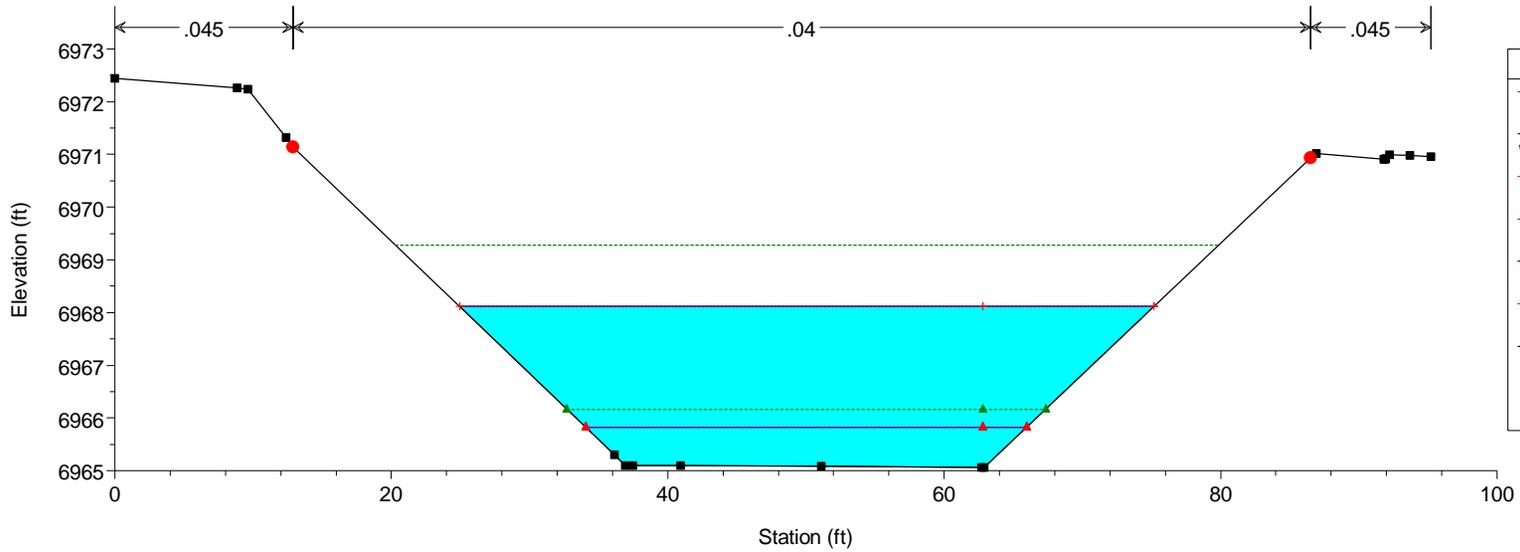


HEC-RAS Model Plan: Phase 1 10/21/2019

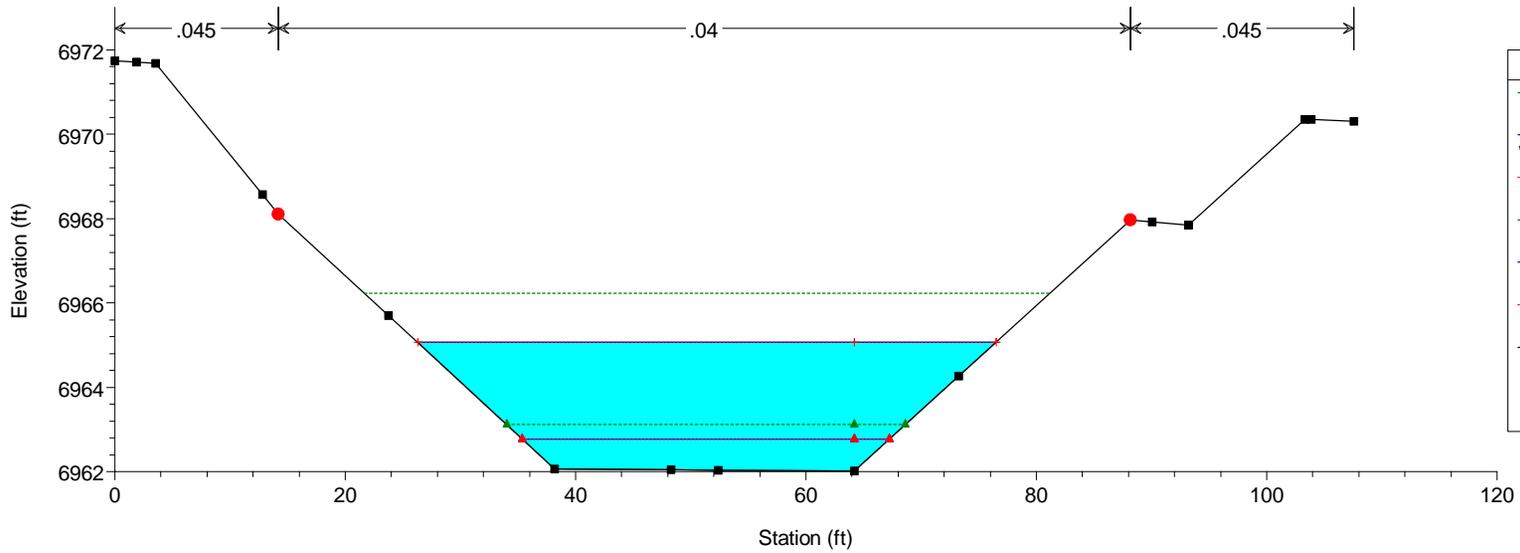


HEC-RAS Model Plan: Phase 1 10/21/2019

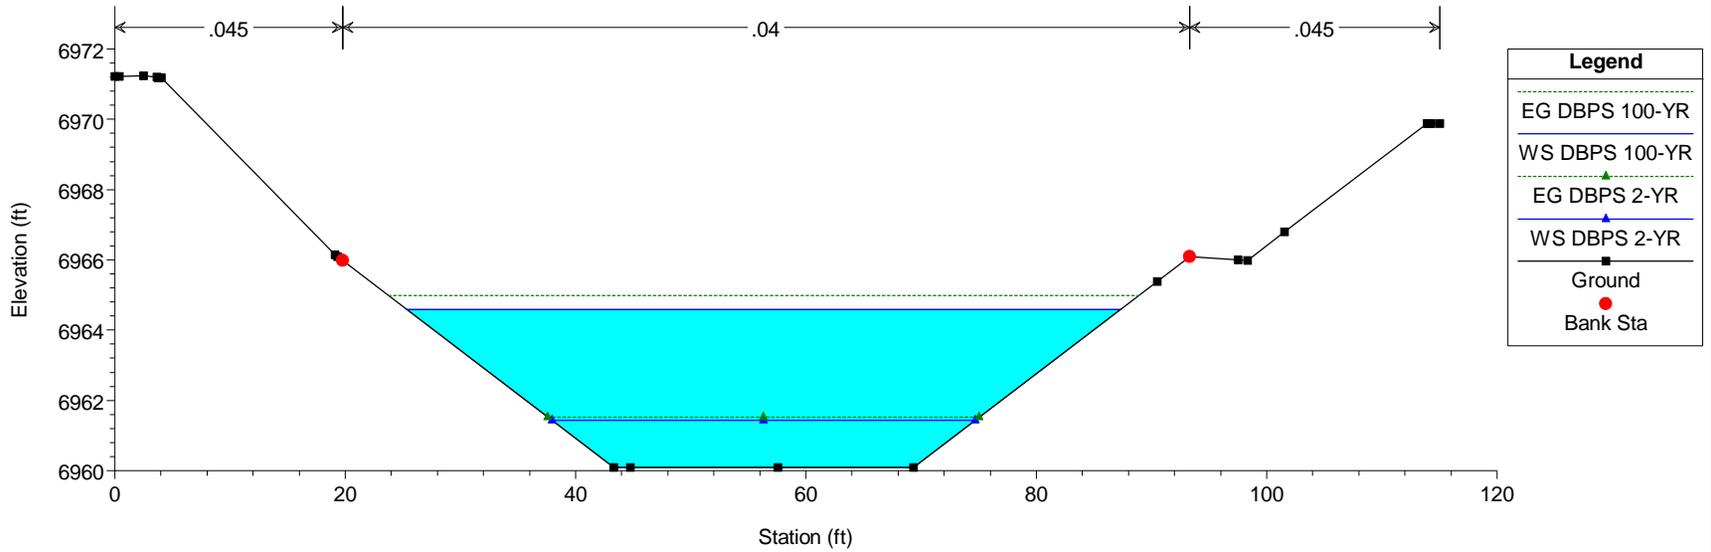

HEC-RAS Model Plan: Phase 1 10/21/2019

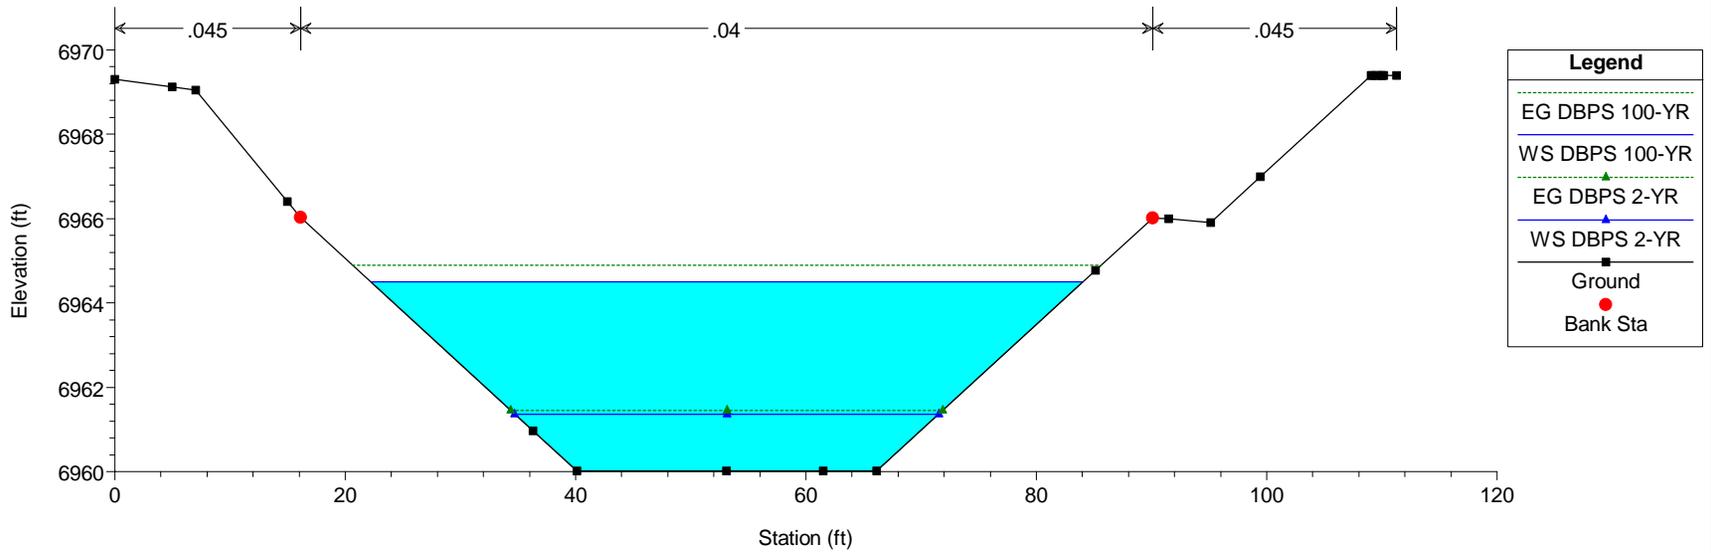


HEC-RAS Model Plan: Phase 1 10/21/2019

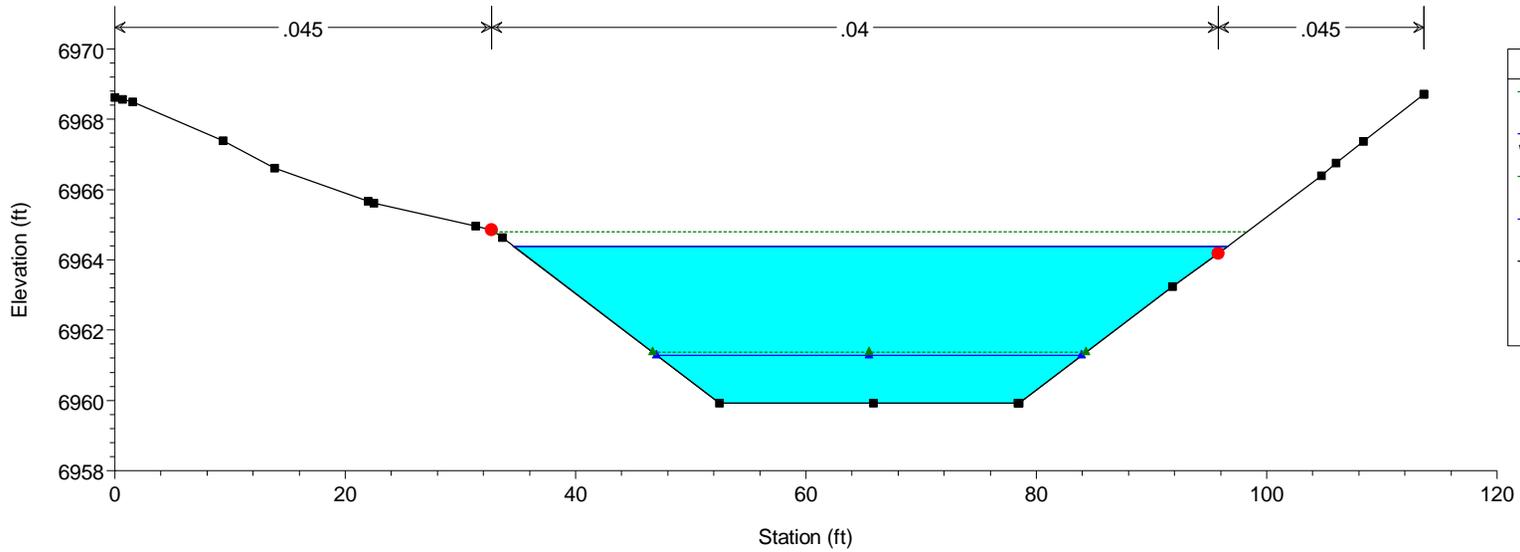


| Legend | |
|----------------|-----------------------------------|
| EG DBPS 100-YR | (Dotted green line) |
| WS DBPS 100-YR | (Solid blue line) |
| EG DBPS 2-YR | (Dotted green line with triangle) |
| WS DBPS 2-YR | (Solid blue line with triangle) |
| Ground | (Black square) |
| Bank Sta | (Red circle) |

HEC-RAS Model Plan: Phase 1 10/21/2019

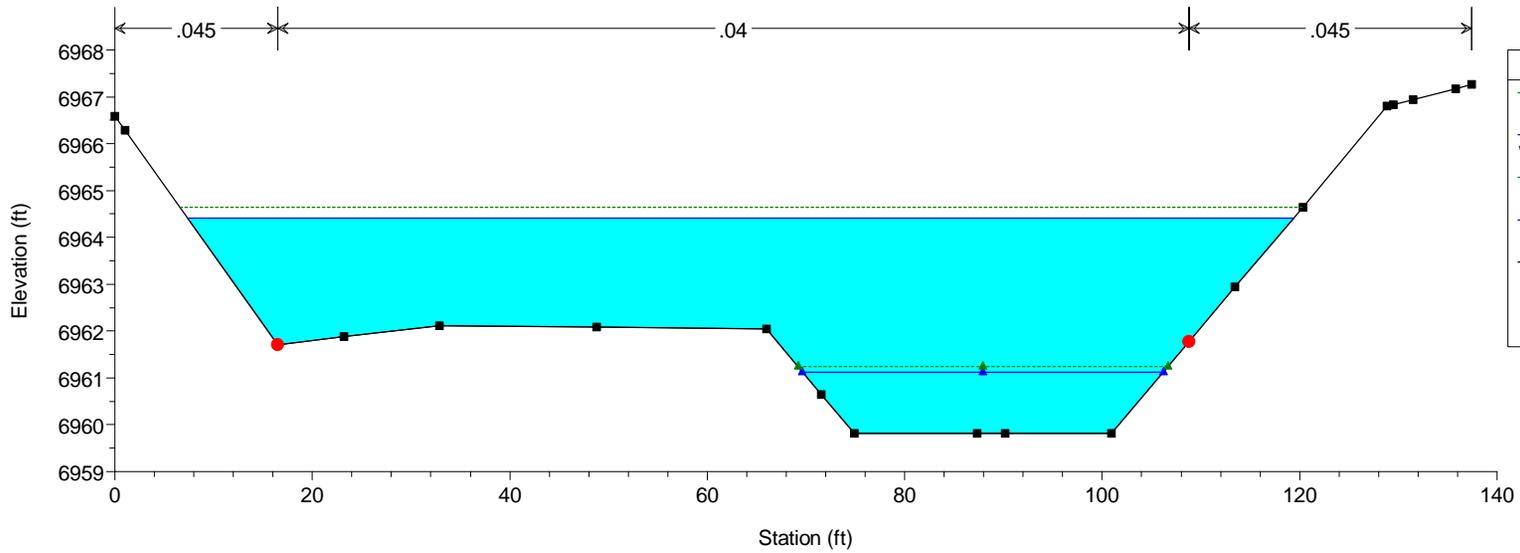


| Legend | |
|----------------|-----------------------------------|
| EG DBPS 100-YR | (Dotted green line) |
| WS DBPS 100-YR | (Solid blue line) |
| EG DBPS 2-YR | (Dotted green line with triangle) |
| WS DBPS 2-YR | (Solid blue line with triangle) |
| Ground | (Black square) |
| Bank Sta | (Red circle) |



HEC-RAS Model Plan: Phase 1 10/21/2019

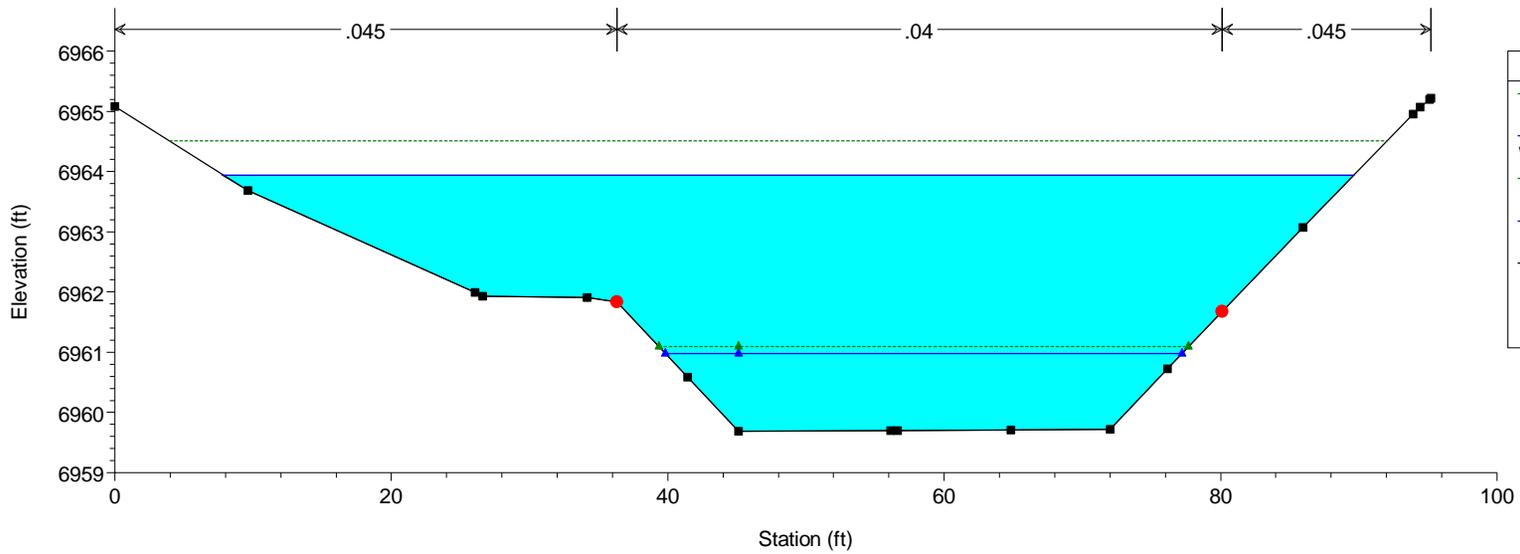



HEC-RAS Model Plan: Phase 1 10/21/2019

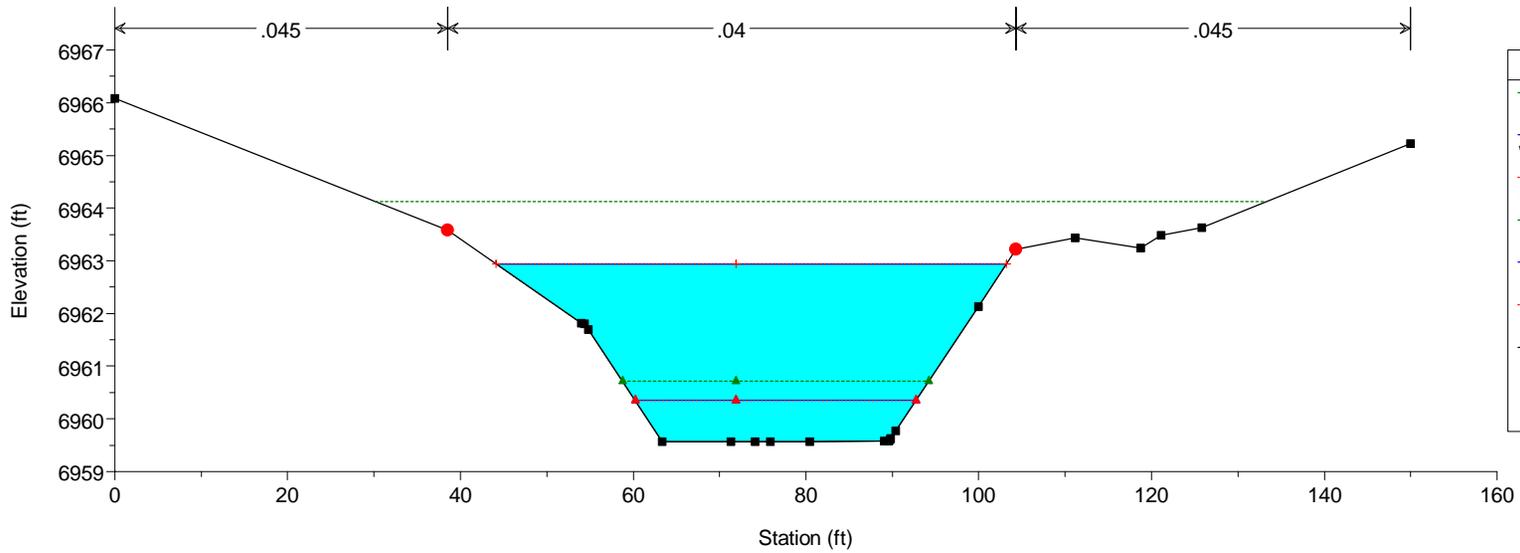


HEC-RAS Model Plan: Phase 1 10/21/2019

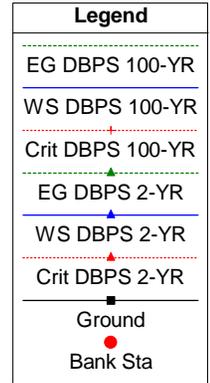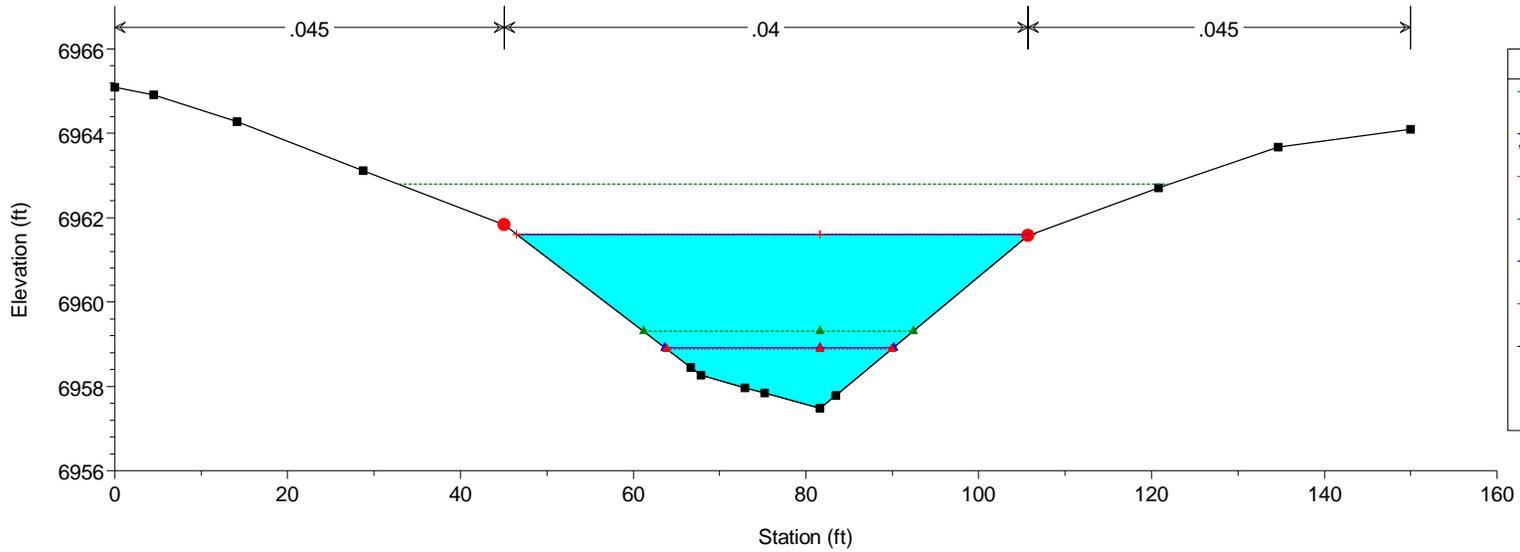


HEC-RAS Model Plan: Phase 1 10/21/2019

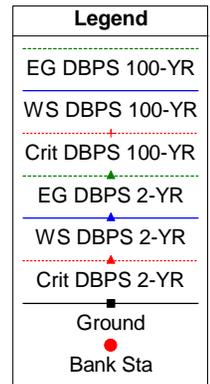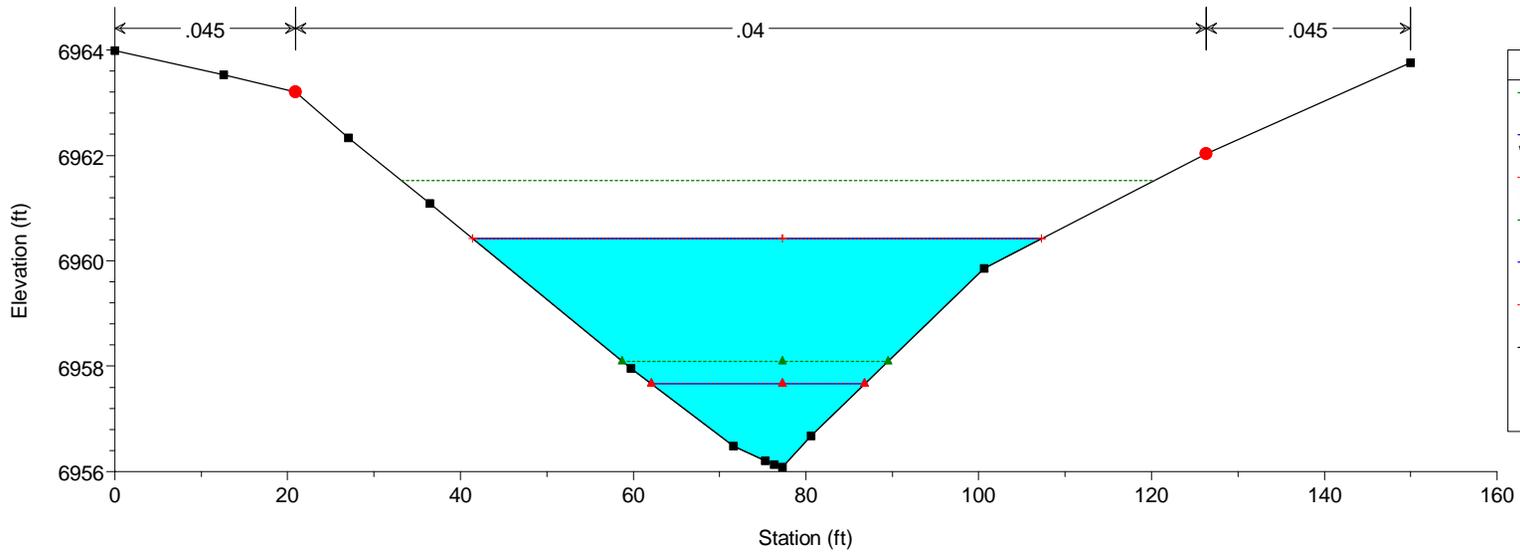


HEC-RAS Model Plan: Phase 1 10/21/2019

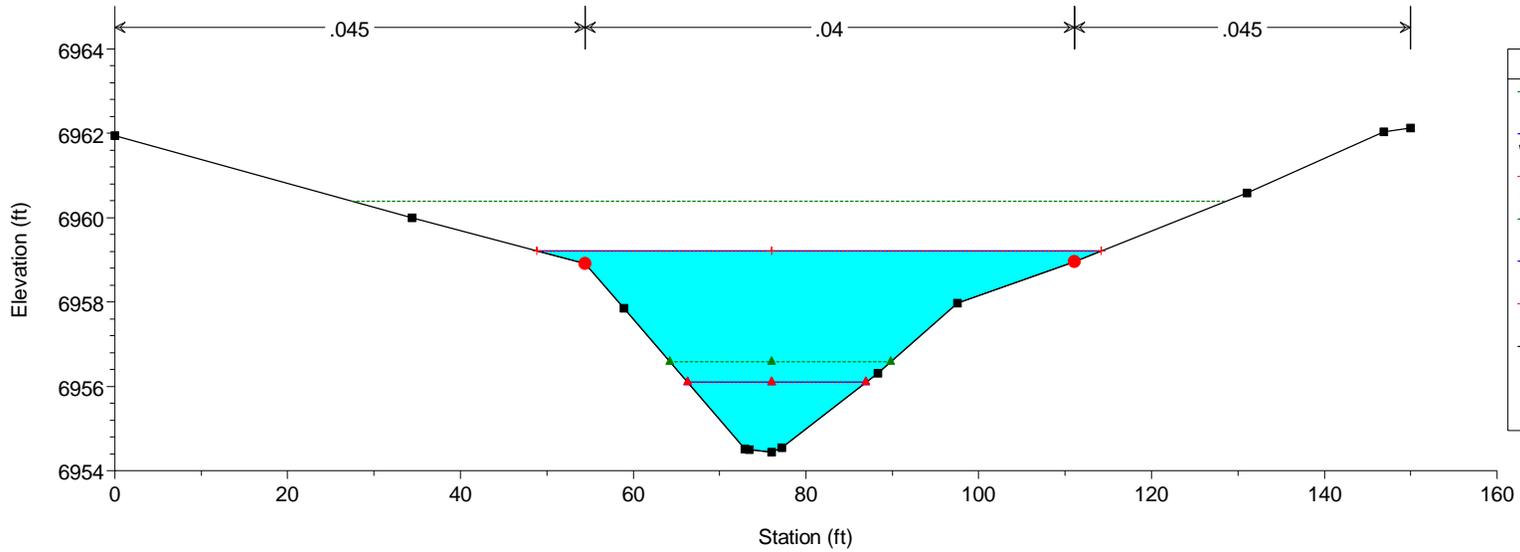


HEC-RAS Model Plan: Phase 1 10/21/2019

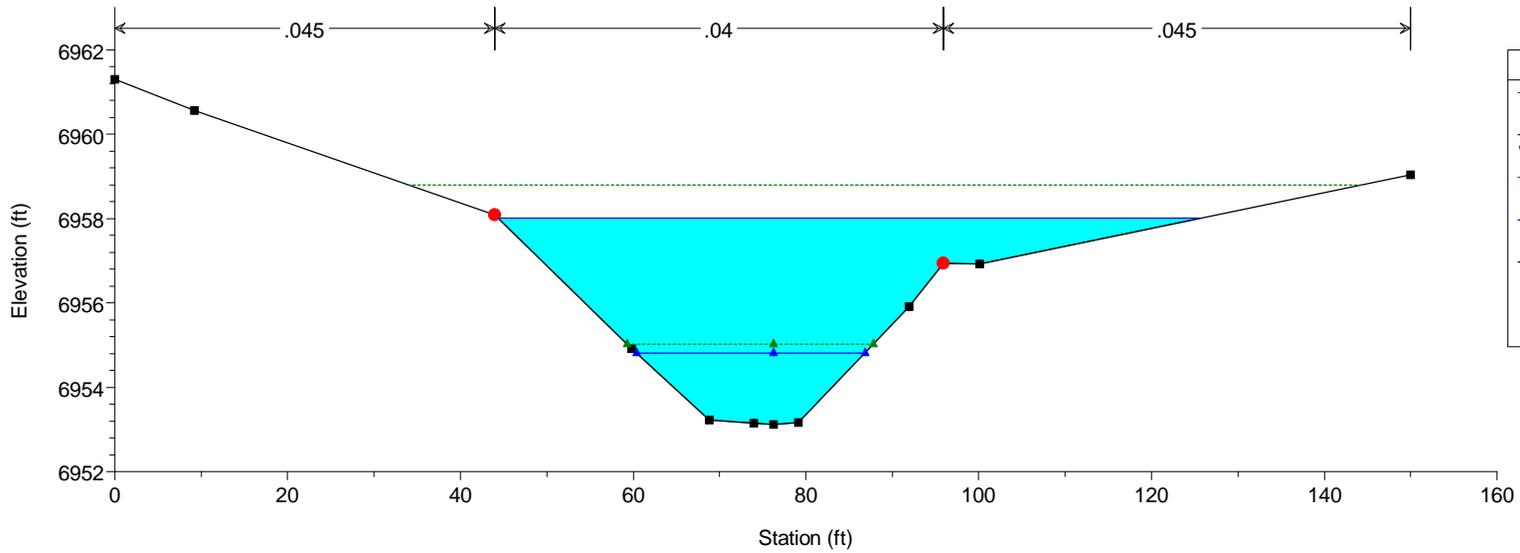


HEC-RAS Model Plan: Phase 1 10/21/2019

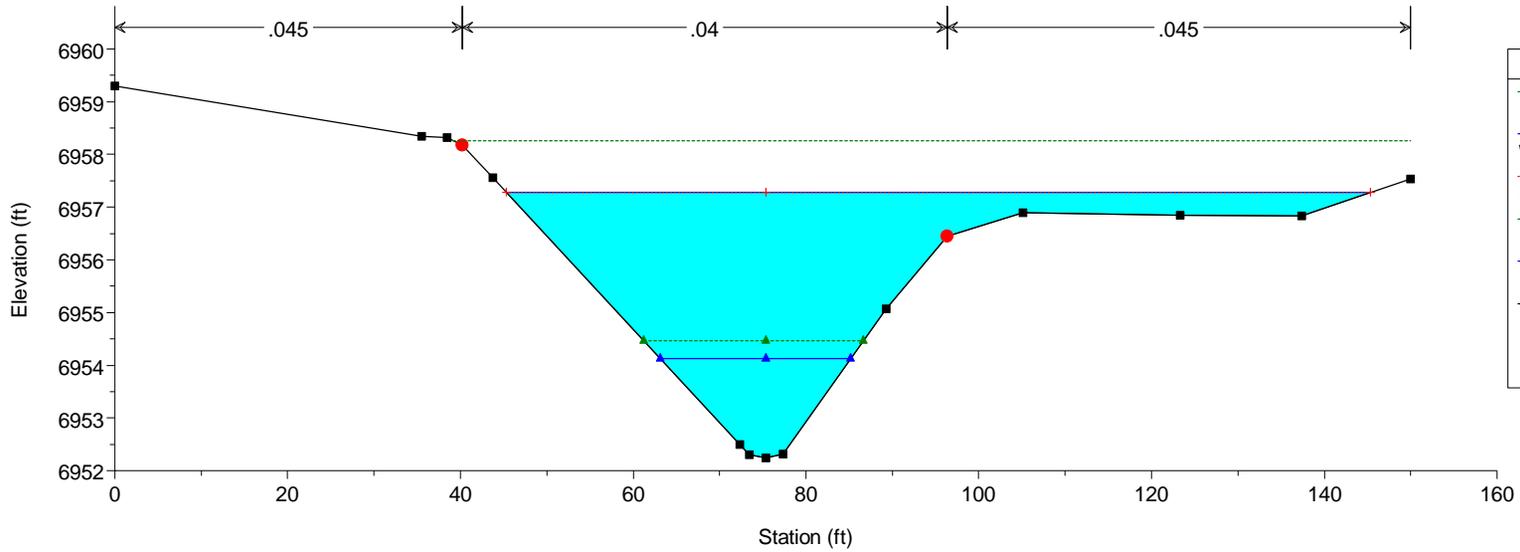


HEC-RAS Model Plan: Phase 1 10/21/2019

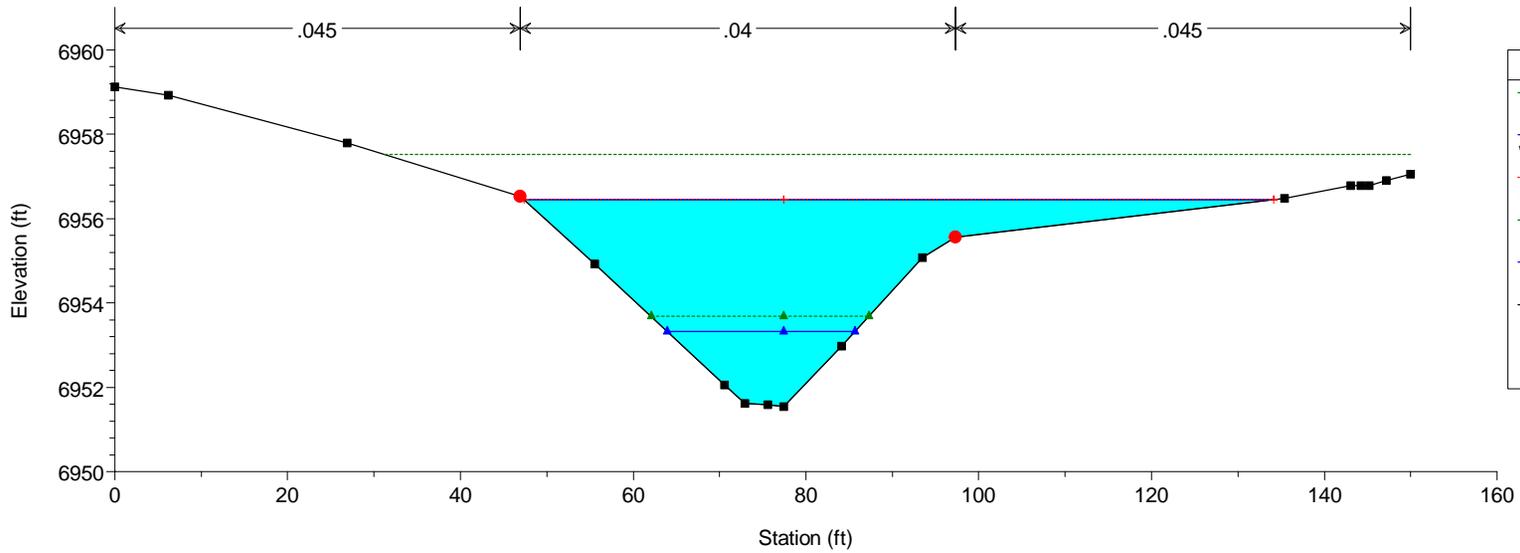


HEC-RAS Model Plan: Phase 1 10/21/2019

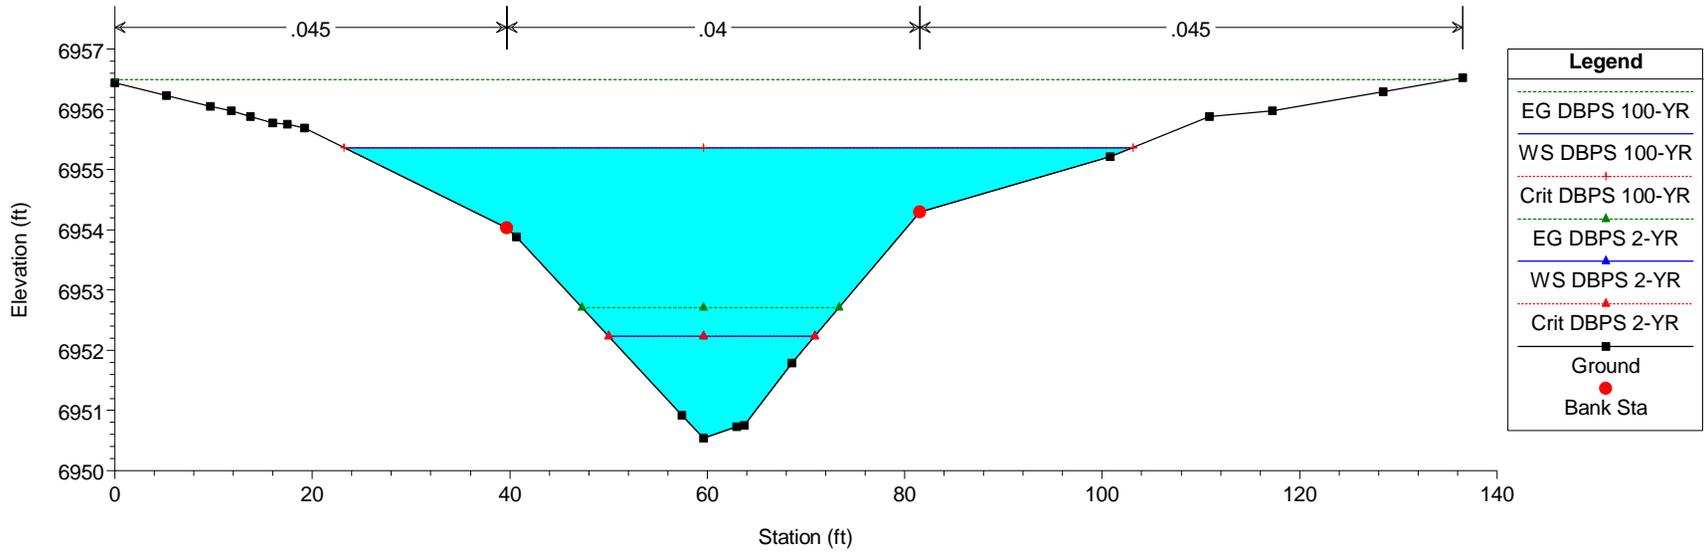

HEC-RAS Model Plan: Phase 1 10/21/2019

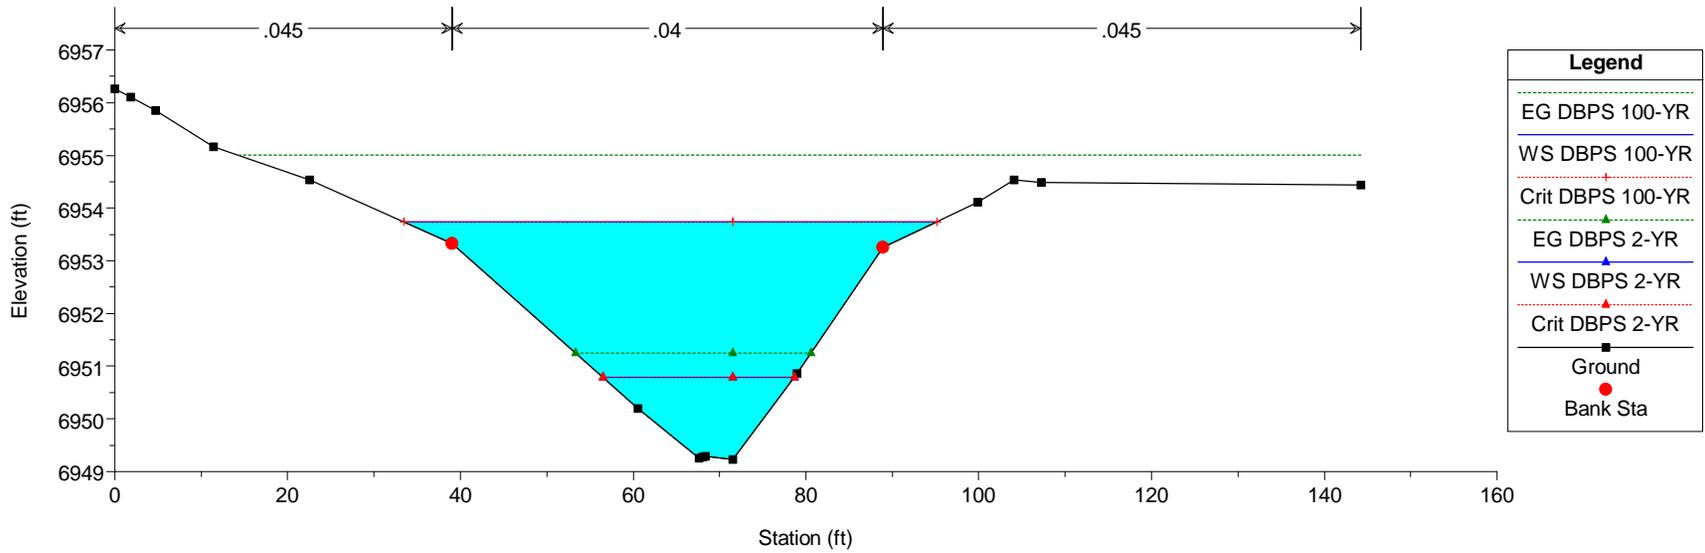


HEC-RAS Model Plan: Phase 1 10/21/2019

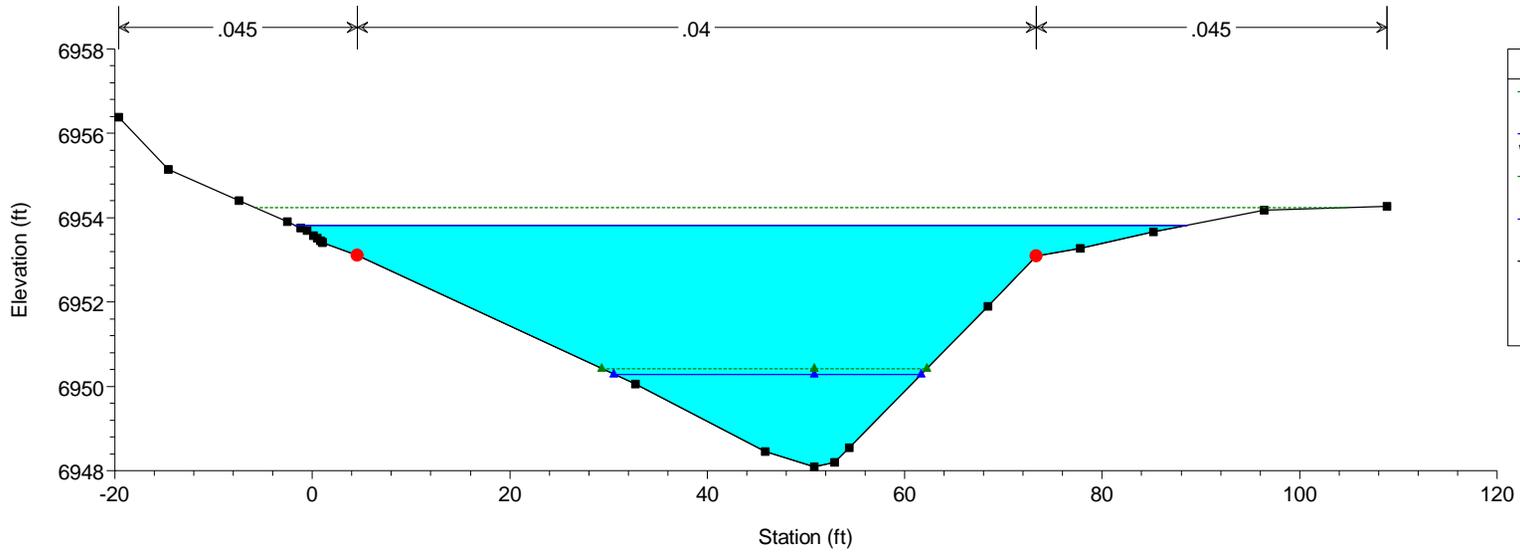


| Legend | |
|----------------|-----------------------|
| EG DBPS 100-YR | — (dotted green line) |
| WS DBPS 100-YR | — (solid blue line) |
| EG DBPS 2-YR | — (dotted green line) |
| WS DBPS 2-YR | — (solid blue line) |
| Ground | — (solid black line) |
| Bank Sta | ● (red dot) |

HEC-RAS Model Plan: Phase 1 10/21/2019

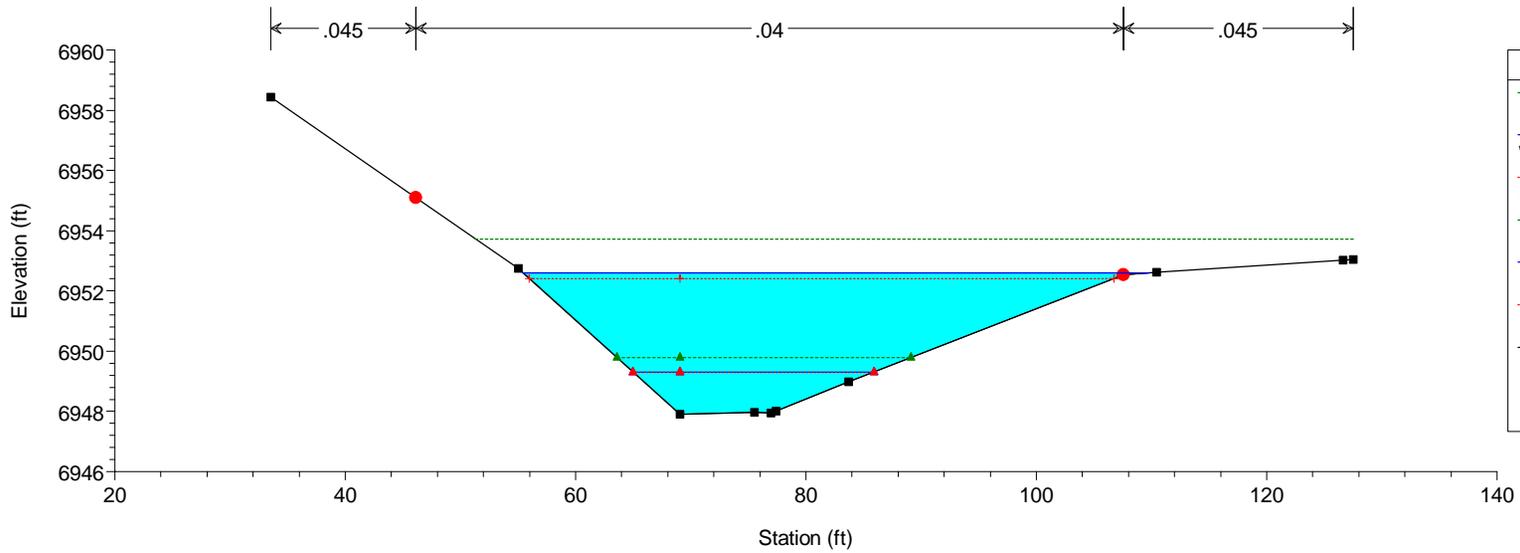


| Legend | |
|------------------|-----------------------|
| EG DBPS 100-YR | — (dotted green line) |
| WS DBPS 100-YR | — (solid blue line) |
| Crit DBPS 100-YR | — (dotted red line) |
| EG DBPS 2-YR | — (dotted green line) |
| WS DBPS 2-YR | — (solid blue line) |
| Crit DBPS 2-YR | — (dotted red line) |
| Ground | — (solid black line) |
| Bank Sta | ● (red dot) |


HEC-RAS Model Plan: Phase 1 10/21/2019

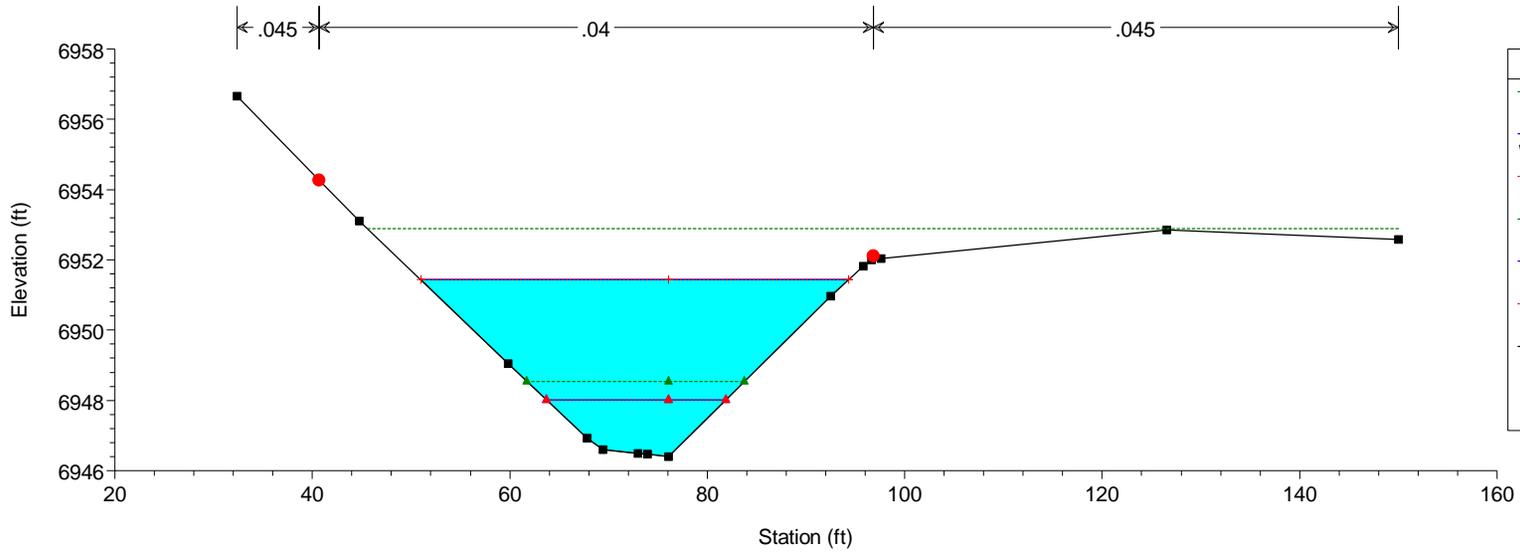

HEC-RAS Model Plan: Phase 1 10/21/2019

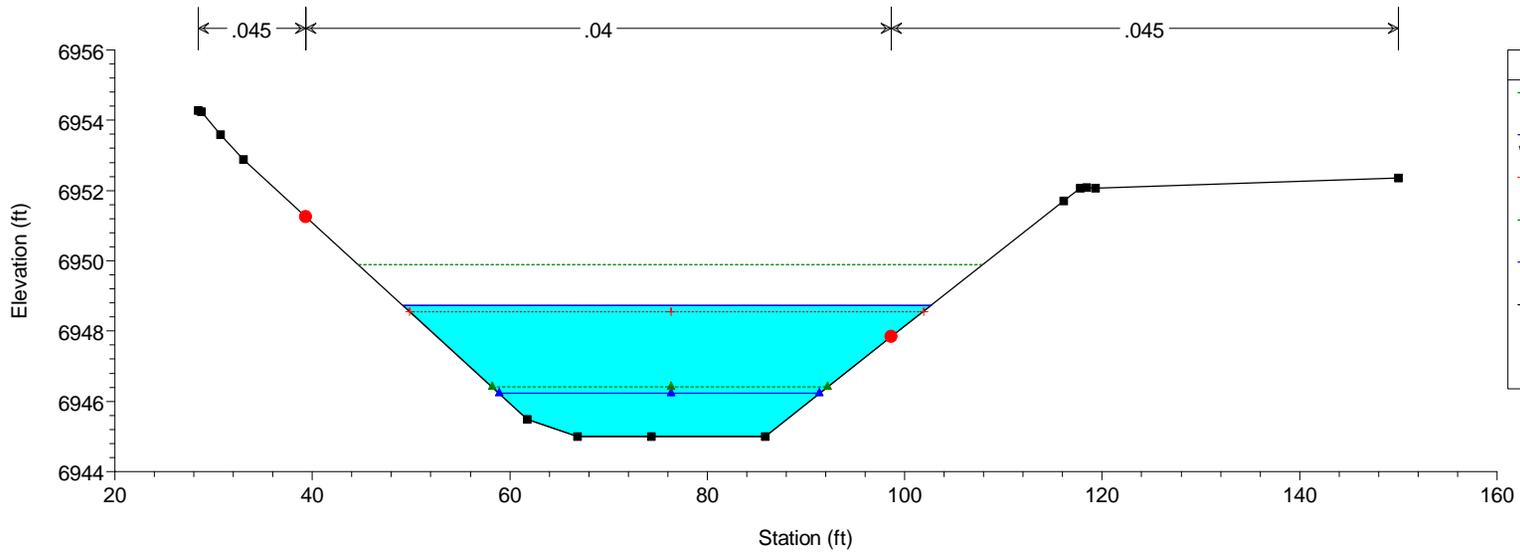


HEC-RAS Model Plan: Phase 1 10/21/2019

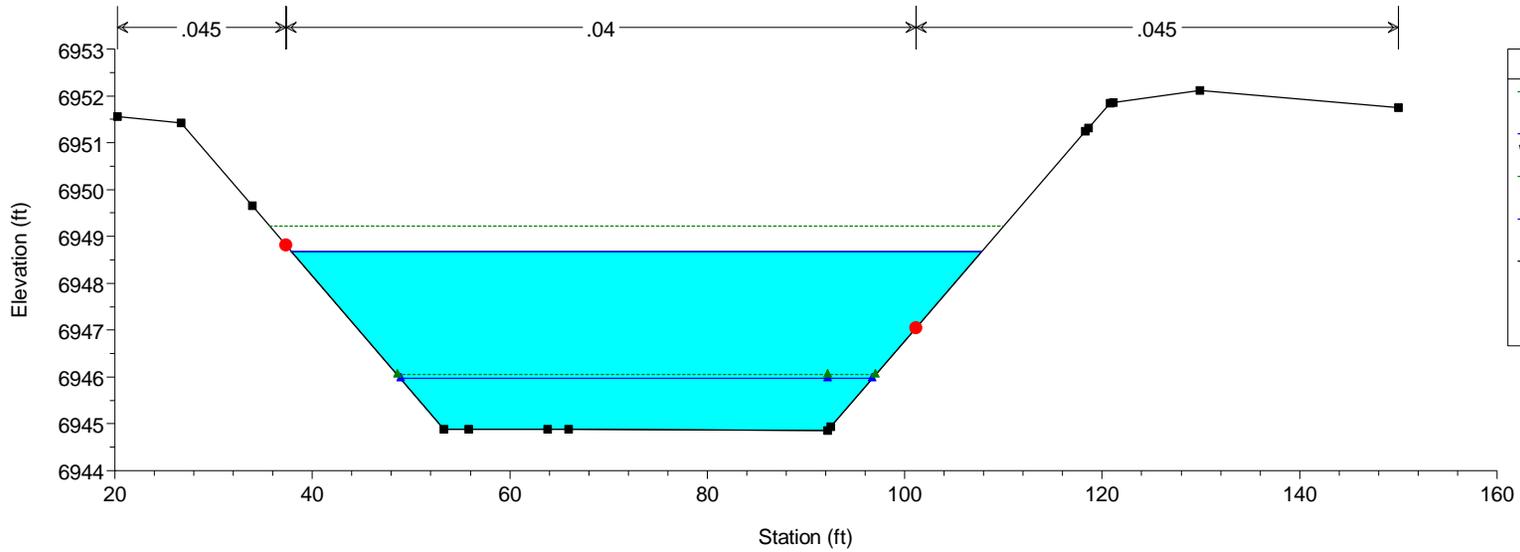


| Legend | |
|----------------|--|
| EG DBPS 100-YR | |
| WS DBPS 100-YR | |
| EG DBPS 2-YR | |
| WS DBPS 2-YR | |
| Ground | |
| Bank Sta | |

HEC-RAS Model Plan: Phase 1 10/21/2019

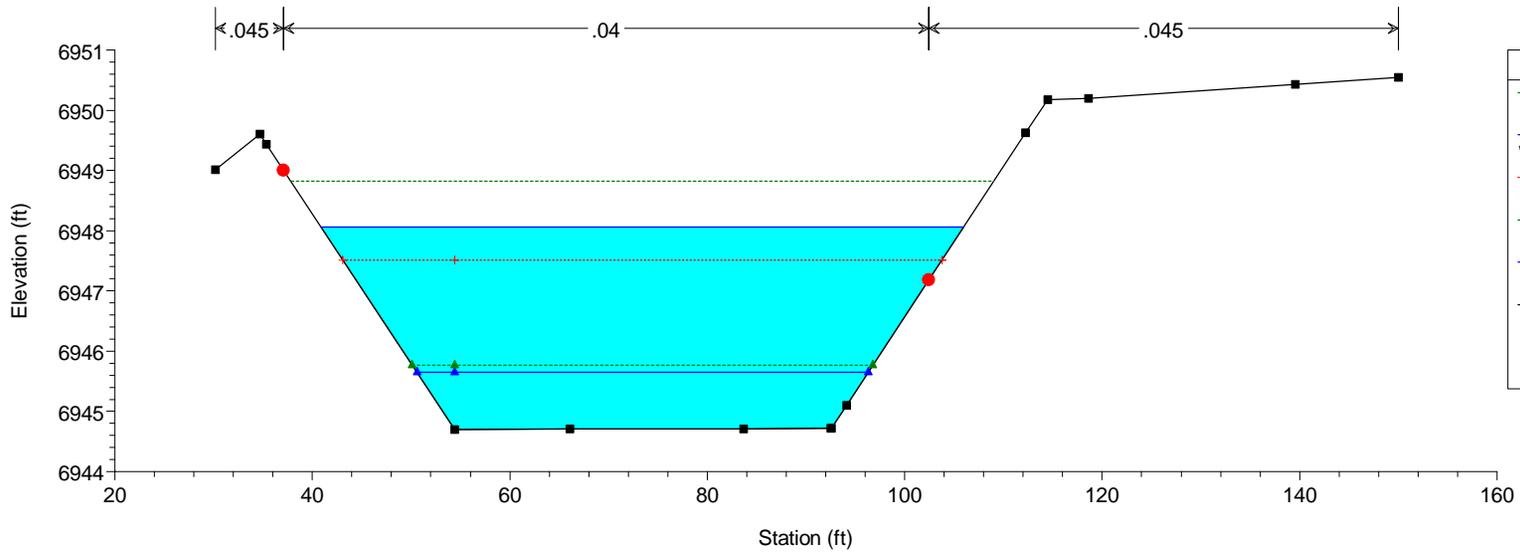


| Legend | |
|------------------|--|
| EG DBPS 100-YR | |
| WS DBPS 100-YR | |
| Crit DBPS 100-YR | |
| EG DBPS 2-YR | |
| WS DBPS 2-YR | |
| Ground | |
| Bank Sta | |


HEC-RAS Model Plan: Phase 1 10/21/2019

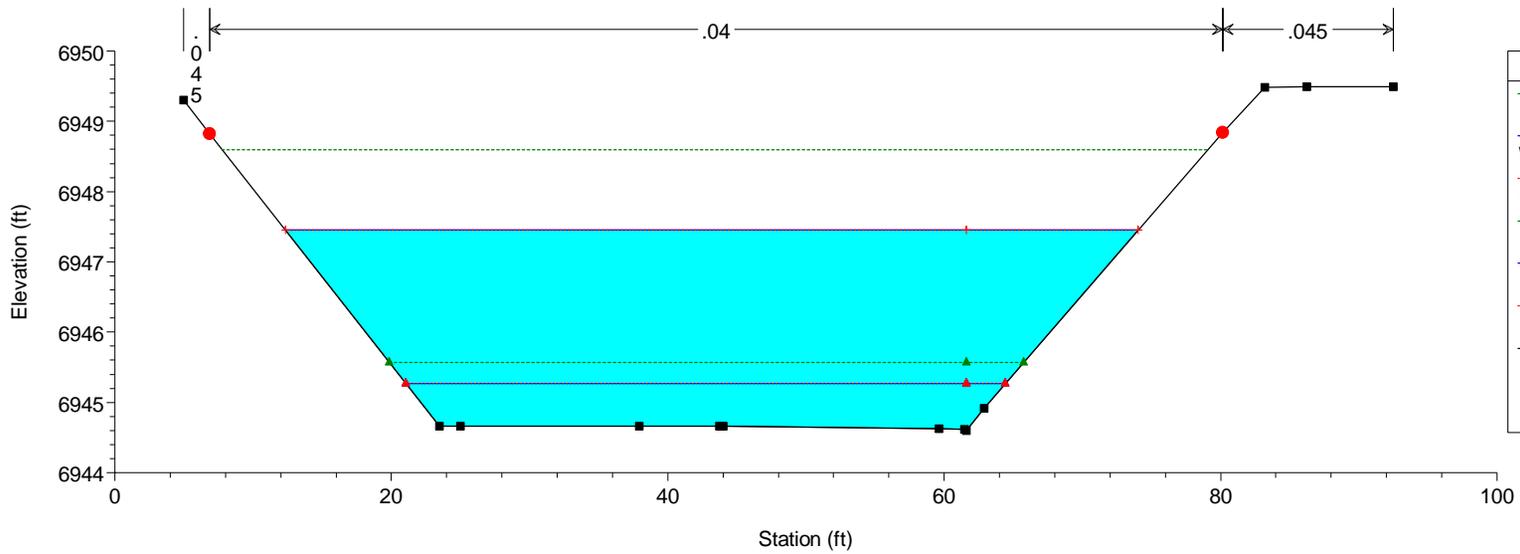

HEC-RAS Model Plan: Phase 1 10/21/2019

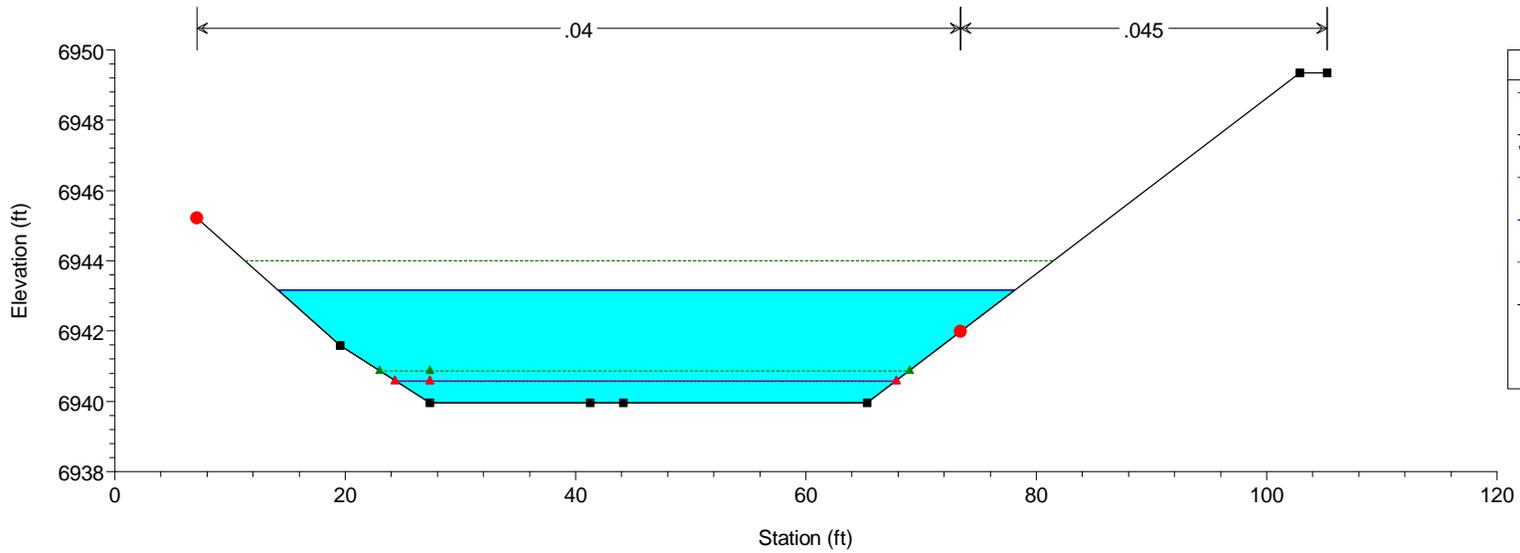


HEC-RAS Model Plan: Phase 1 10/21/2019

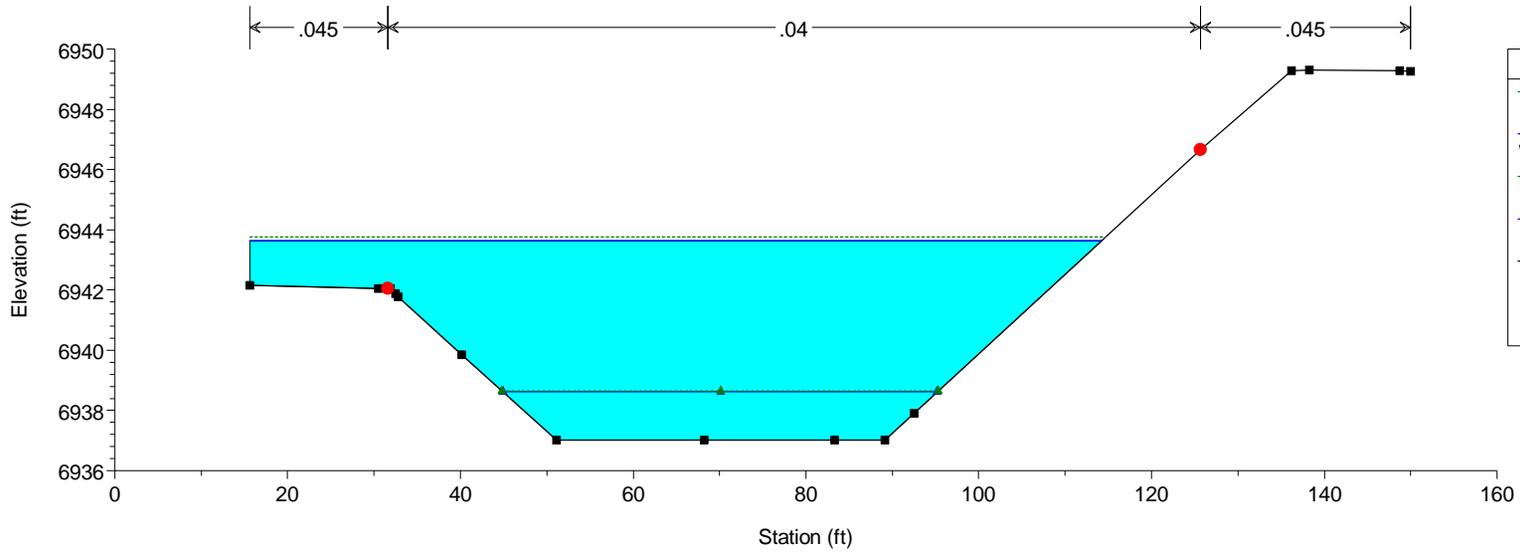


| Legend | |
|----------------|--|
| EG DBPS 100-YR | |
| WS DBPS 100-YR | |
| EG DBPS 2-YR | |
| WS DBPS 2-YR | |
| Ground | |
| Bank Sta | |

HEC-RAS Model Plan: Phase 1 10/21/2019

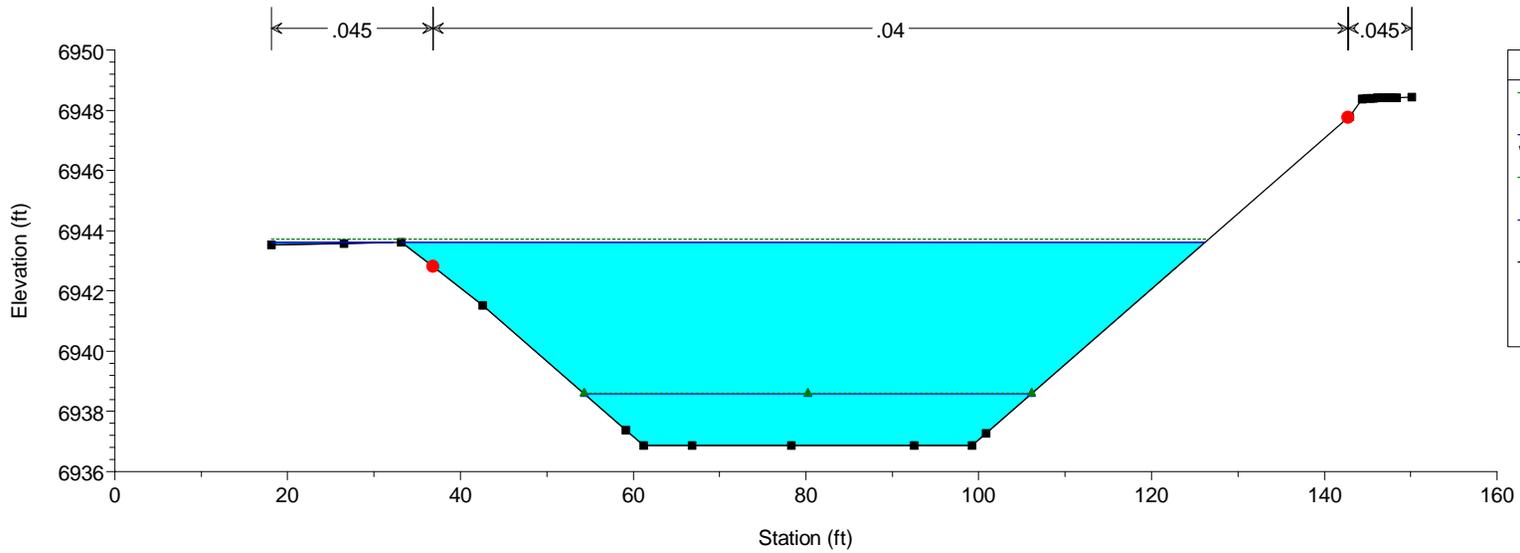


| Legend | |
|----------------|--|
| EG DBPS 100-YR | |
| WS DBPS 100-YR | |
| EG DBPS 2-YR | |
| WS DBPS 2-YR | |
| Ground | |
| Bank Sta | |



HEC-RAS Model Plan: Phase 1 10/21/2019

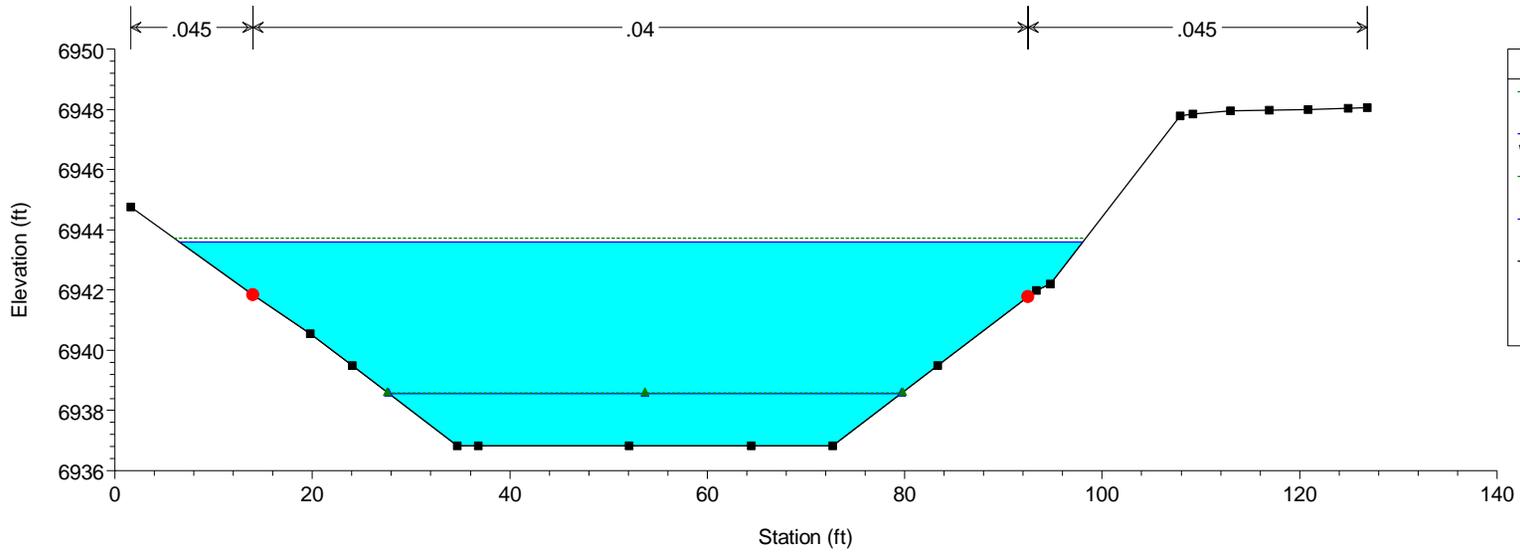



HEC-RAS Model Plan: Phase 1 10/21/2019

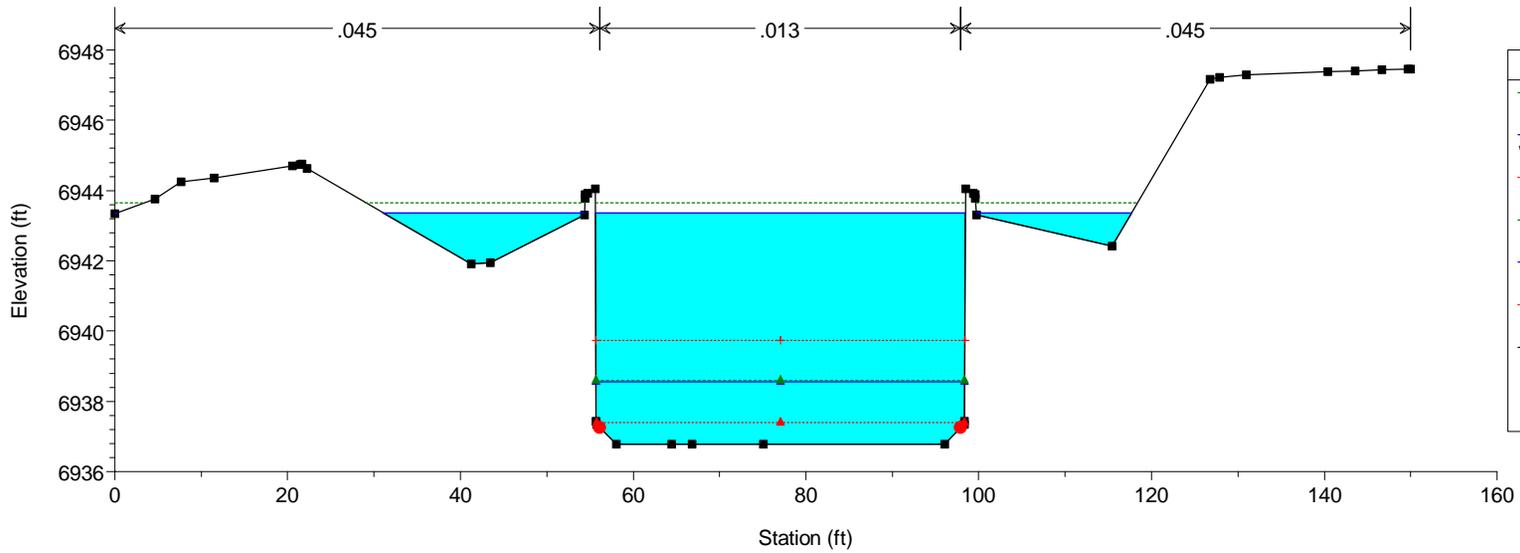



HEC-RAS Model Plan: Phase 1 10/21/2019

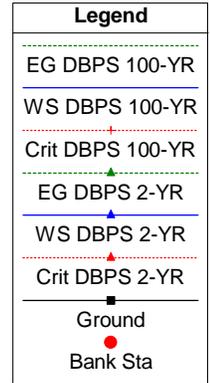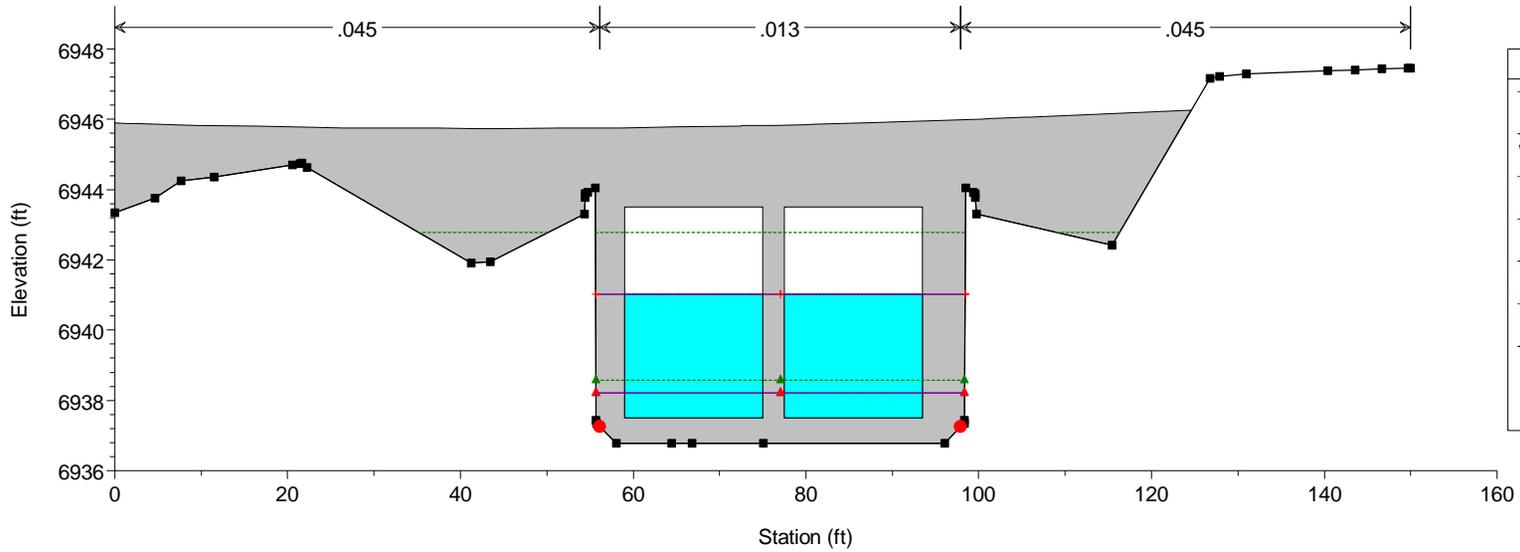



HEC-RAS Model Plan: Phase 1 10/21/2019

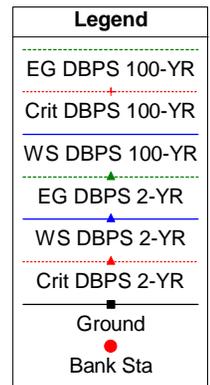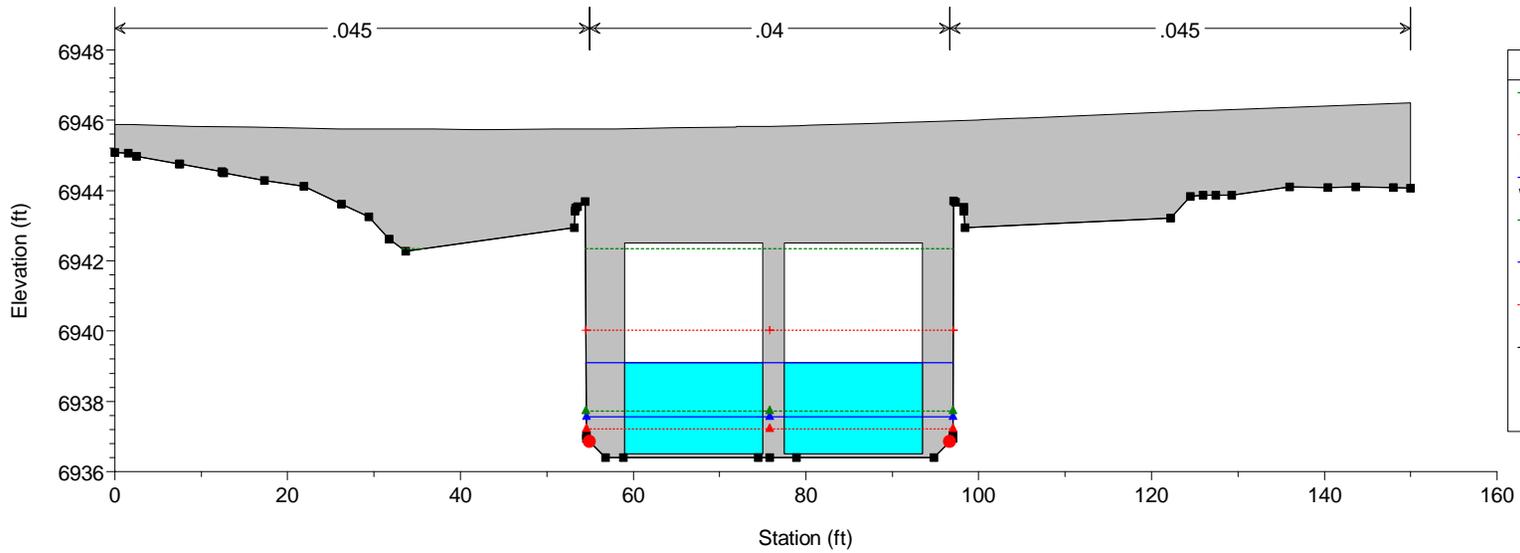



HEC-RAS Model Plan: Phase 1 10/21/2019

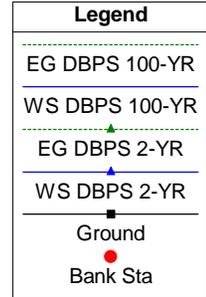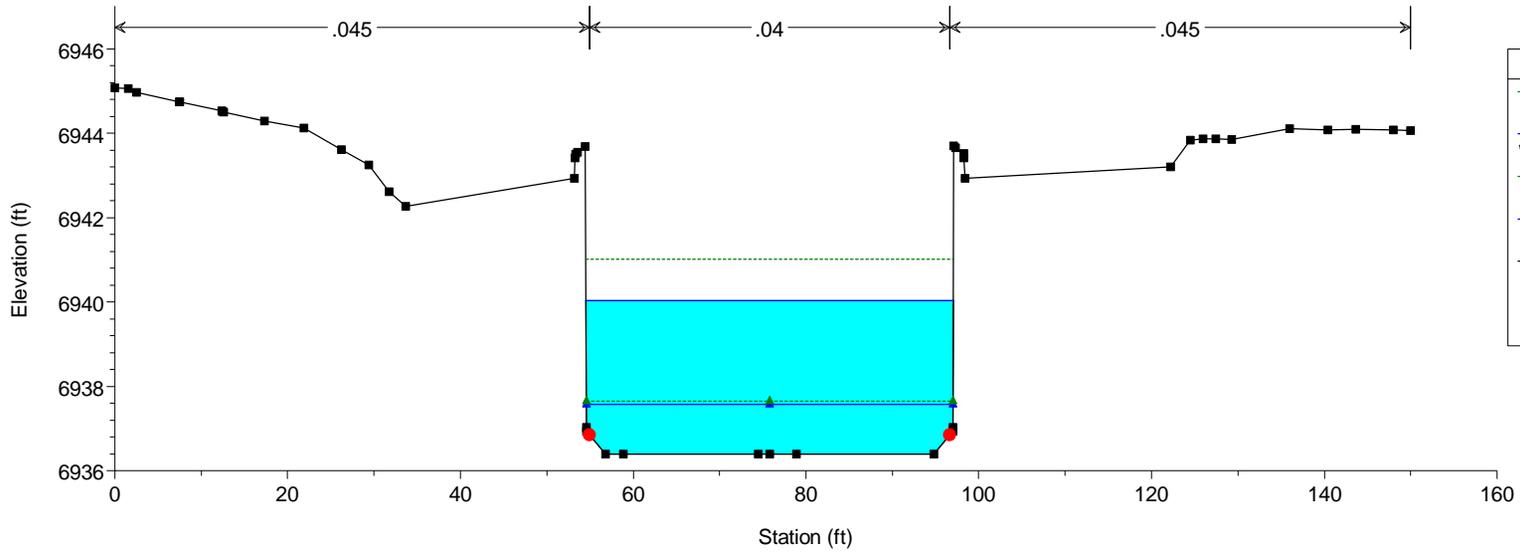



HEC-RAS Model Plan: Phase 1 10/21/2019

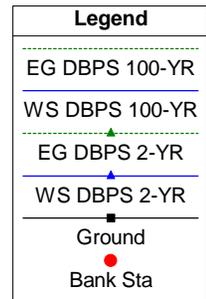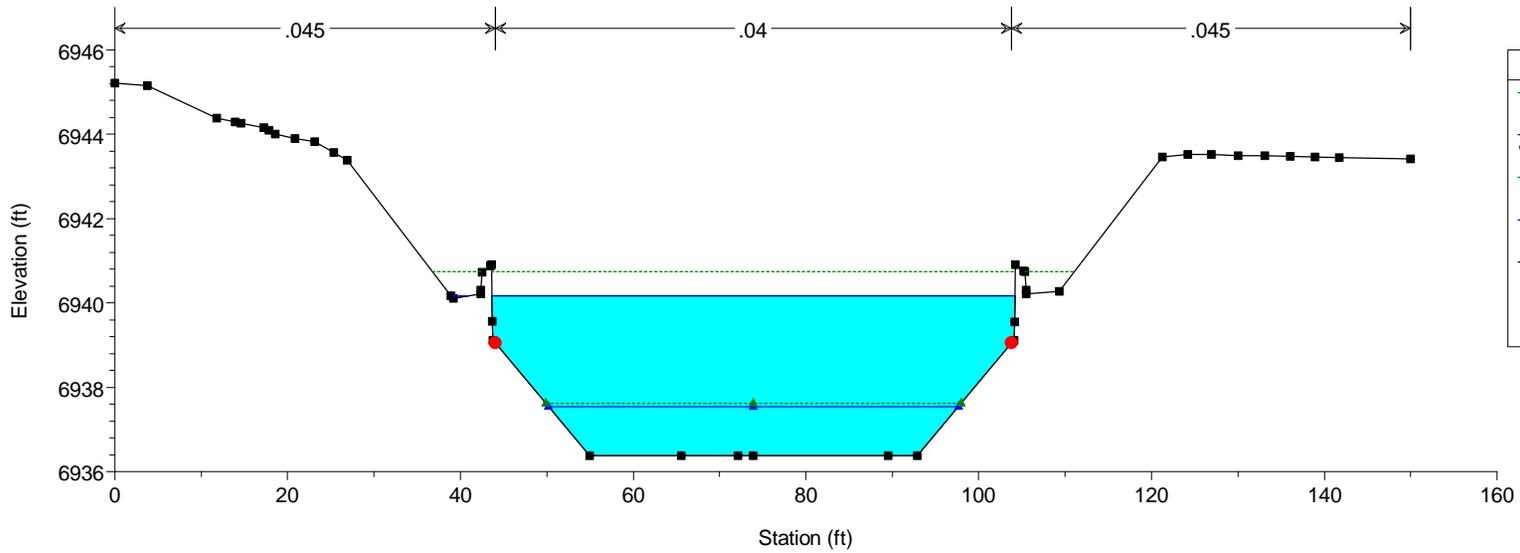


HEC-RAS Model Plan: Phase 1 10/21/2019

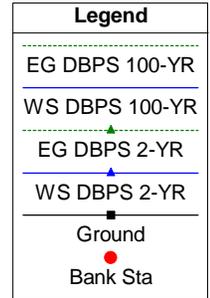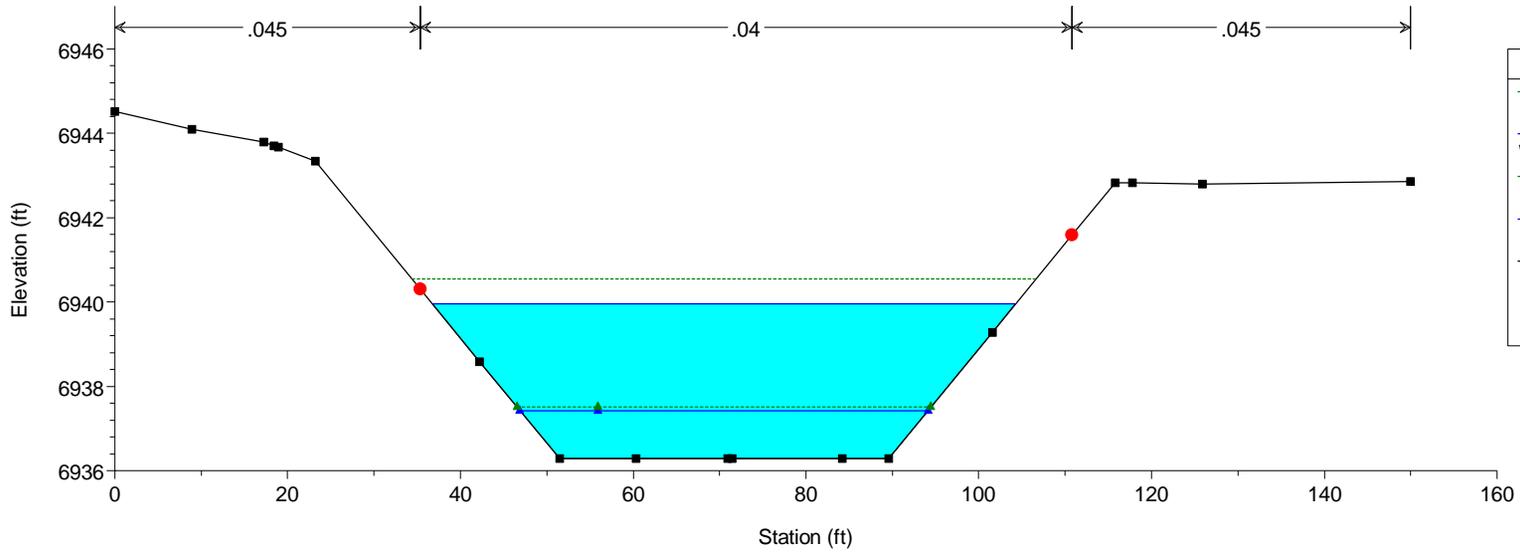


HEC-RAS Model Plan: Phase 1 10/21/2019

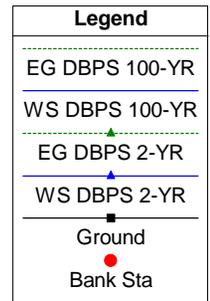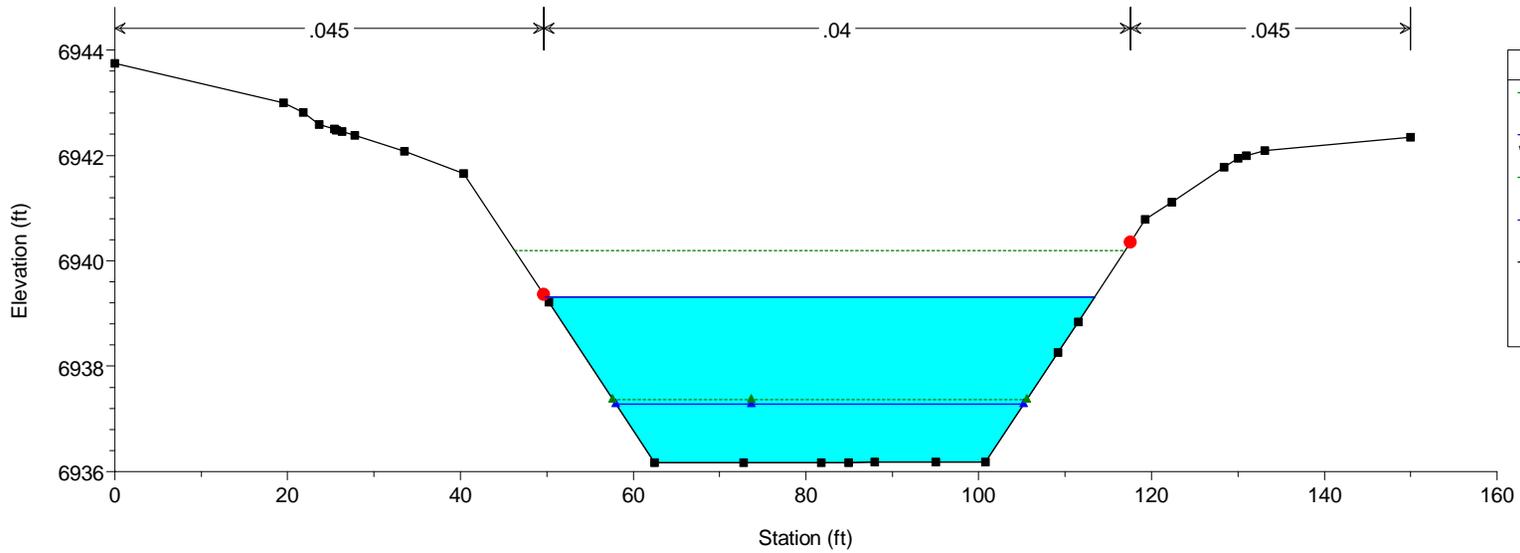


HEC-RAS Model Plan: Phase 1 10/21/2019

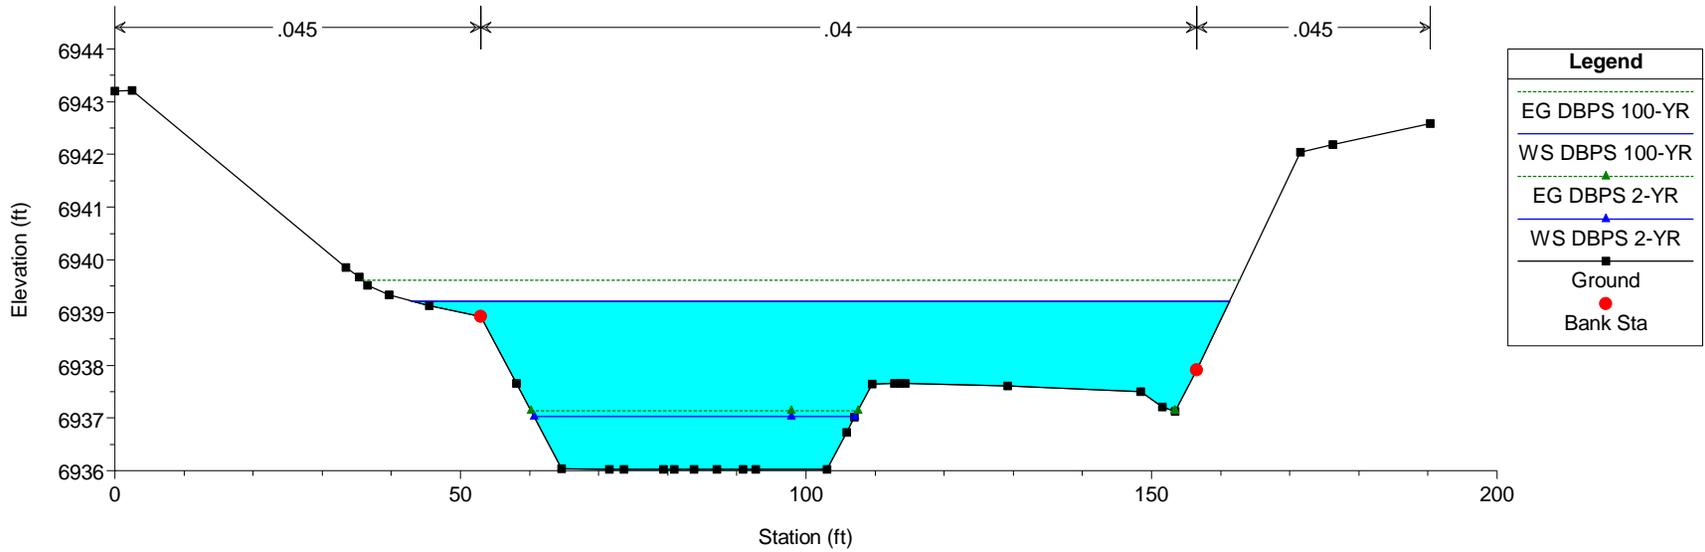


HEC-RAS Model Plan: Phase 1 10/21/2019

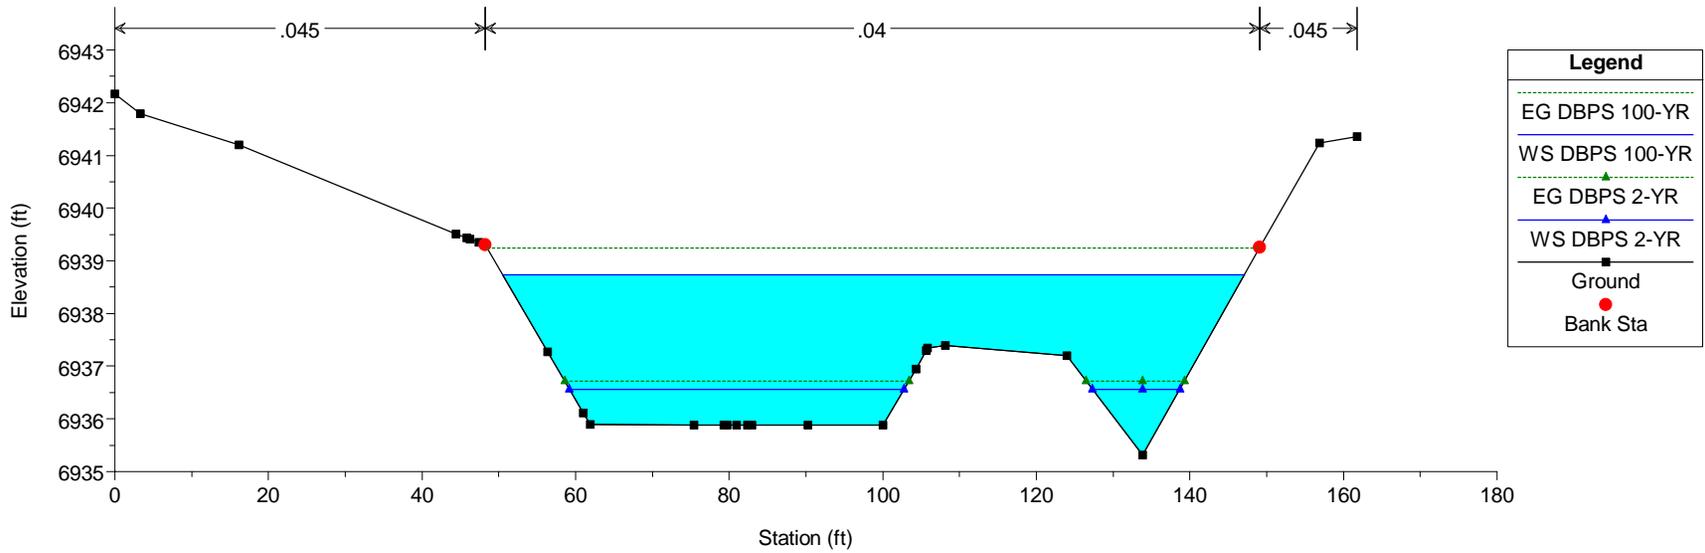


HEC-RAS Model Plan: Phase 1 10/21/2019

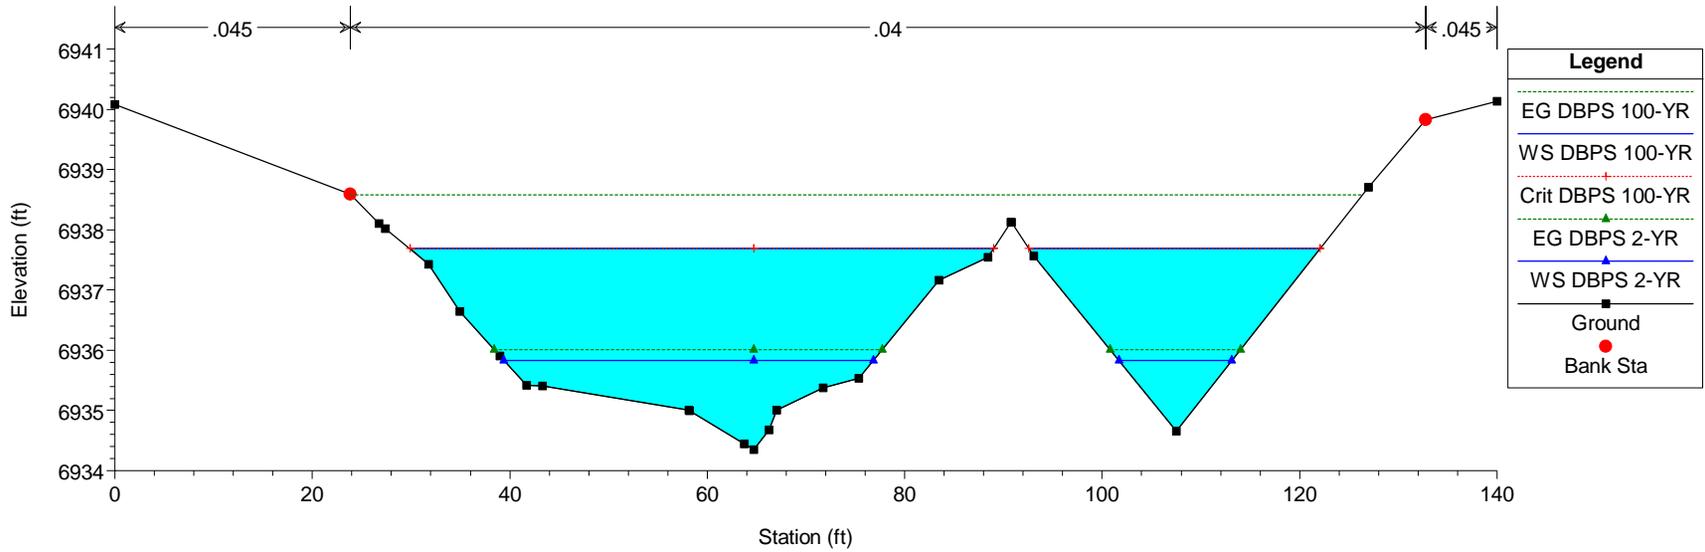


HEC-RAS Model Plan: Phase 1 10/21/2019

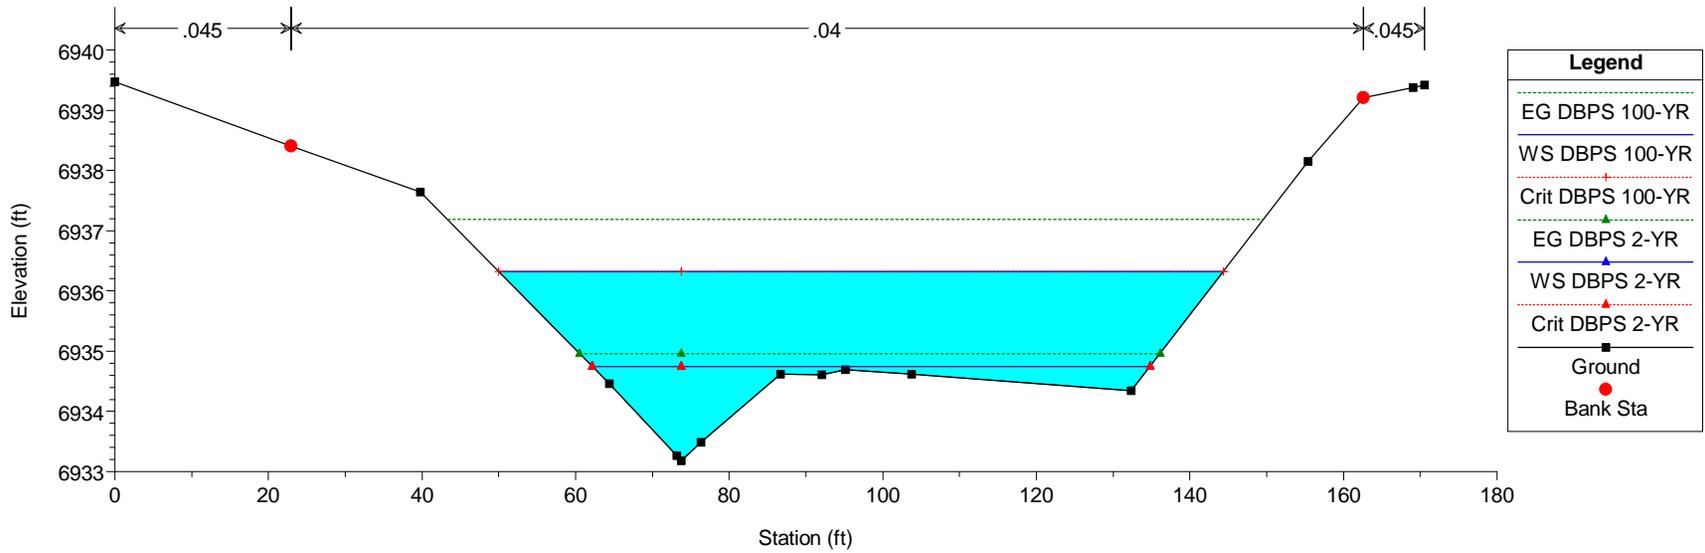


HEC-RAS Model Plan: Phase 1 10/21/2019

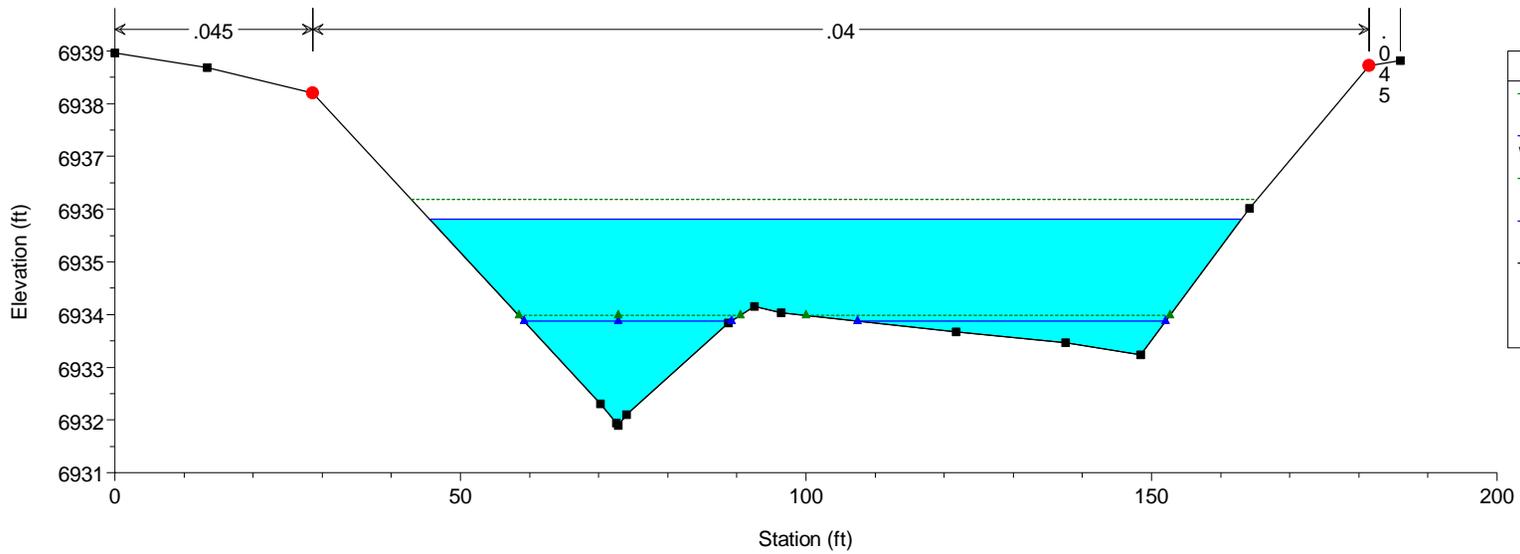


HEC-RAS Model Plan: Phase 1 10/21/2019

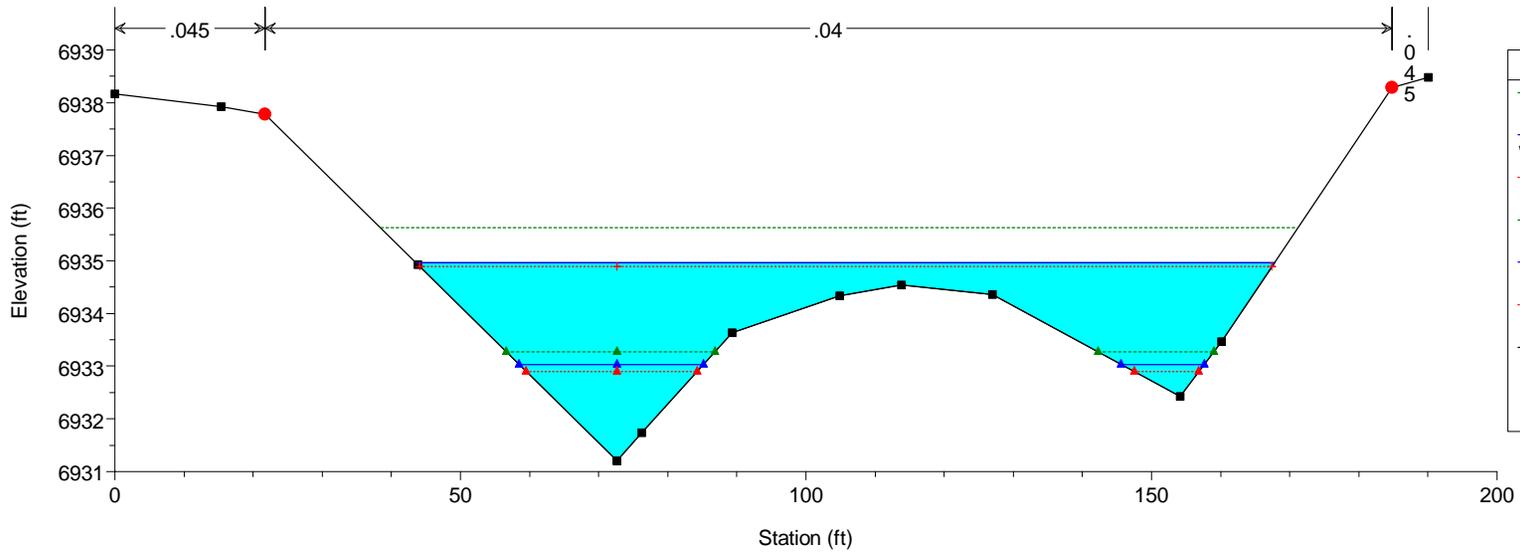


HEC-RAS Model Plan: Phase 1 10/21/2019

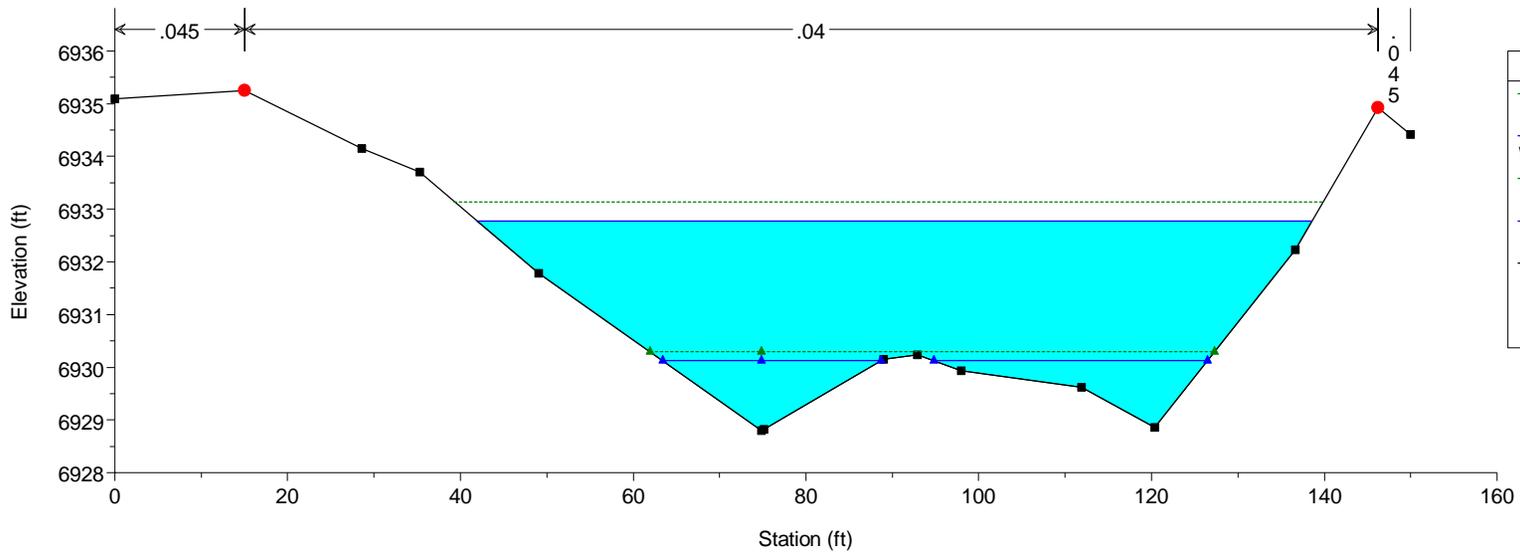

HEC-RAS Model Plan: Phase 1 10/21/2019

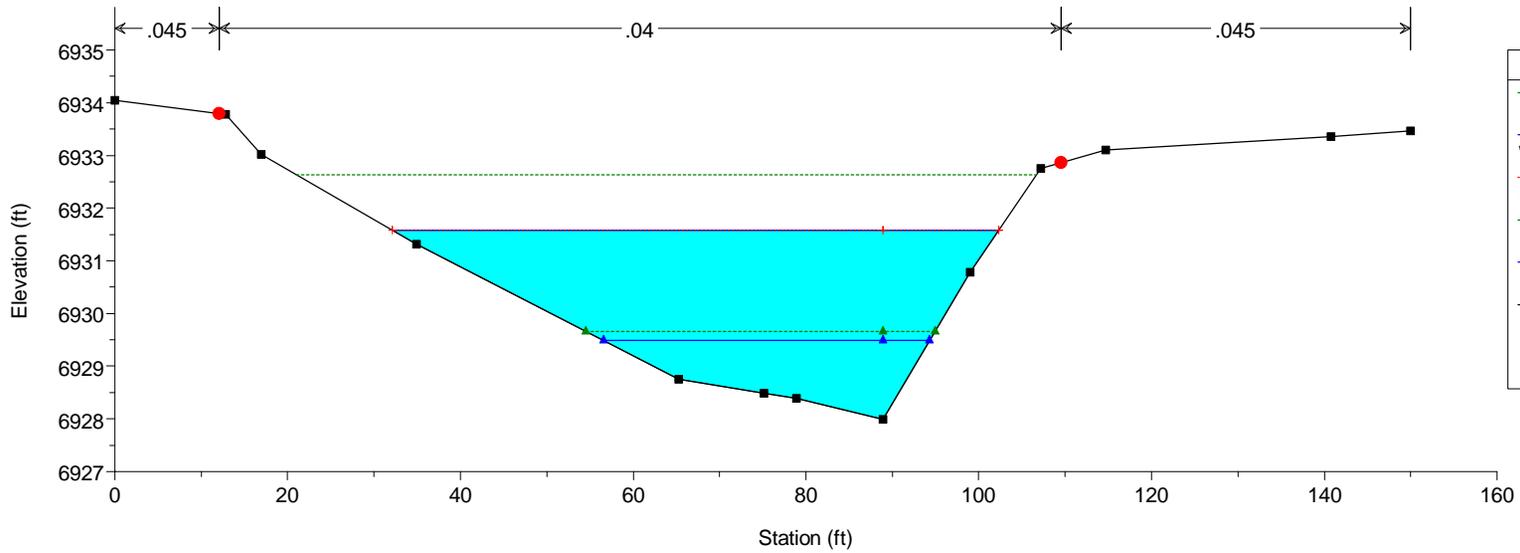


HEC-RAS Model Plan: Phase 1 10/21/2019

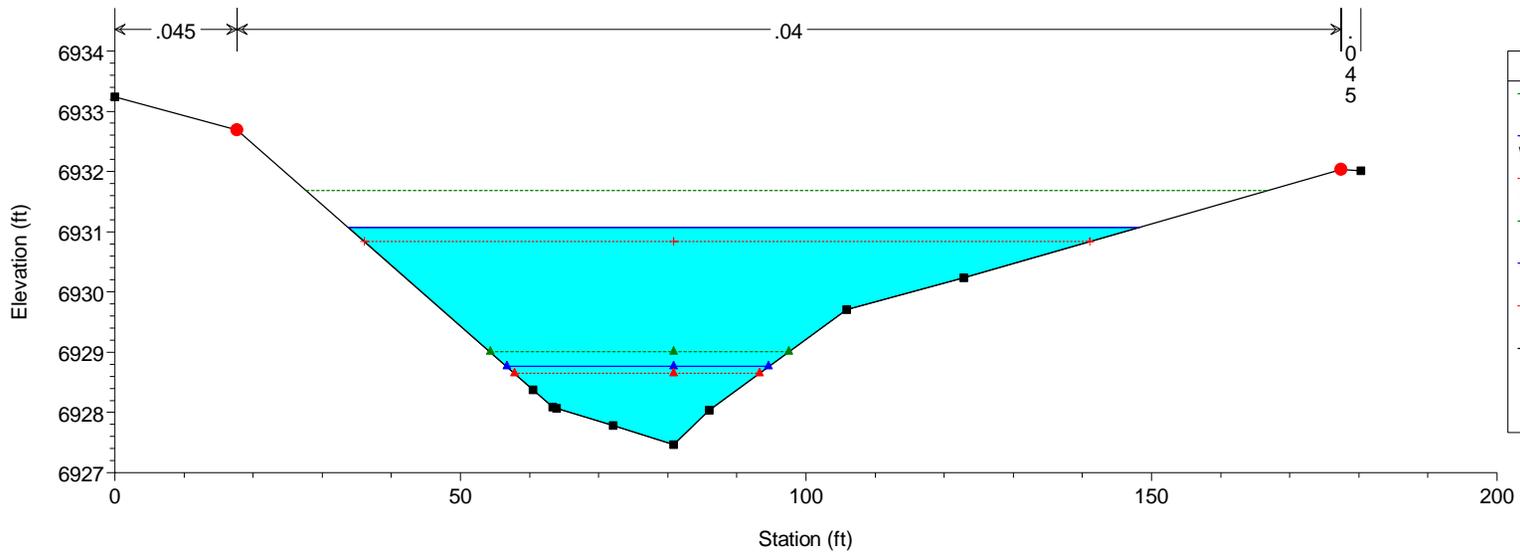


| Legend | |
|------------------|---------------------|
| EG DBPS 100-YR | (Dotted green line) |
| WS DBPS 100-YR | (Solid red line) |
| Crit DBPS 100-YR | (Dotted red line) |
| EG DBPS 2-YR | (Dotted blue line) |
| WS DBPS 2-YR | (Solid blue line) |
| Crit DBPS 2-YR | (Dotted blue line) |
| Ground | (Solid black line) |
| Bank Sta | (Red dot) |

HEC-RAS Model Plan: Phase 1 10/21/2019

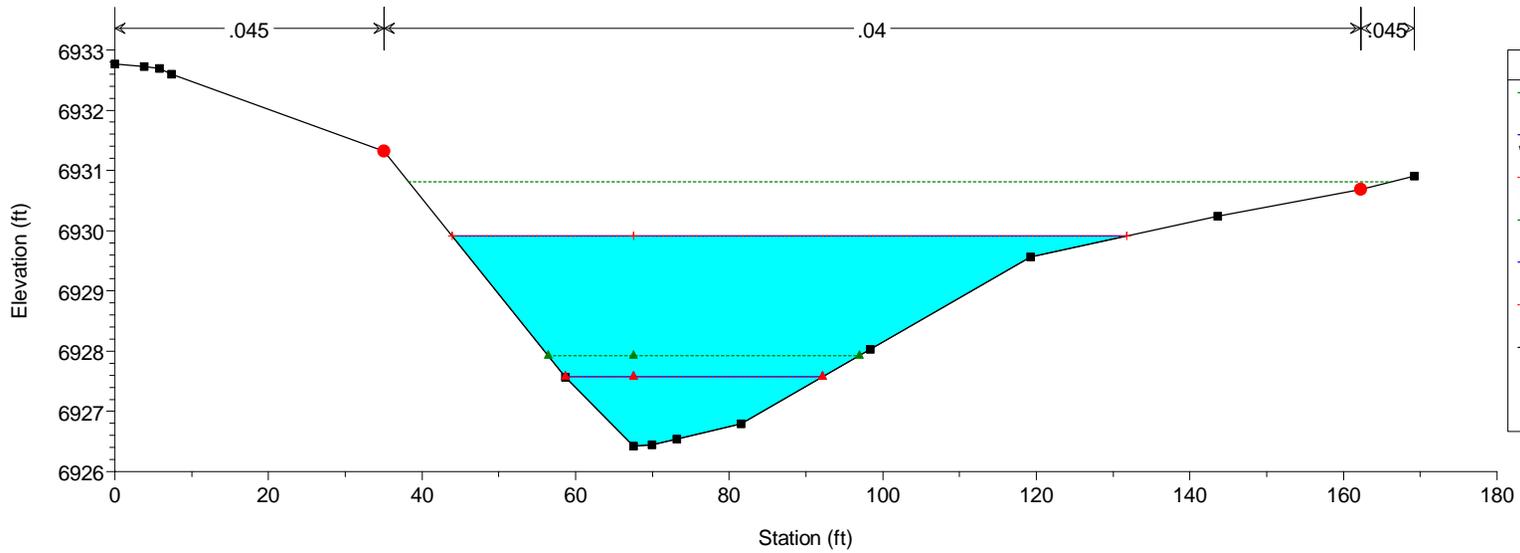


| Legend | |
|------------------|---------------------|
| EG DBPS 100-YR | (Dotted green line) |
| WS DBPS 100-YR | (Solid red line) |
| Crit DBPS 100-YR | (Dotted red line) |
| EG DBPS 2-YR | (Dotted blue line) |
| WS DBPS 2-YR | (Solid blue line) |
| Crit DBPS 2-YR | (Dotted blue line) |
| Ground | (Solid black line) |
| Bank Sta | (Red dot) |

HEC-RAS Model Plan: Phase 1 10/21/2019

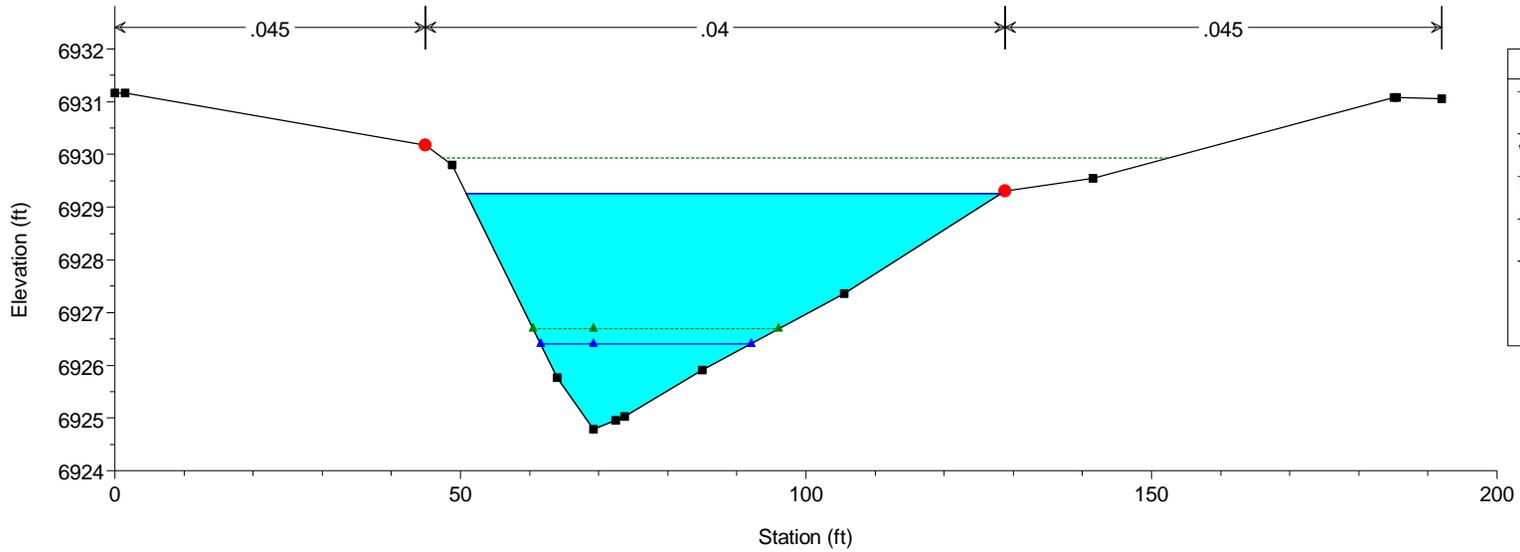



| Legend | |
|----------------|--|
| EG DBPS 100-YR | |
| WS DBPS 100-YR | |
| EG DBPS 2-YR | |
| WS DBPS 2-YR | |
| Ground | |
| Bank Sta | |

HEC-RAS Model Plan: Phase 1 10/21/2019


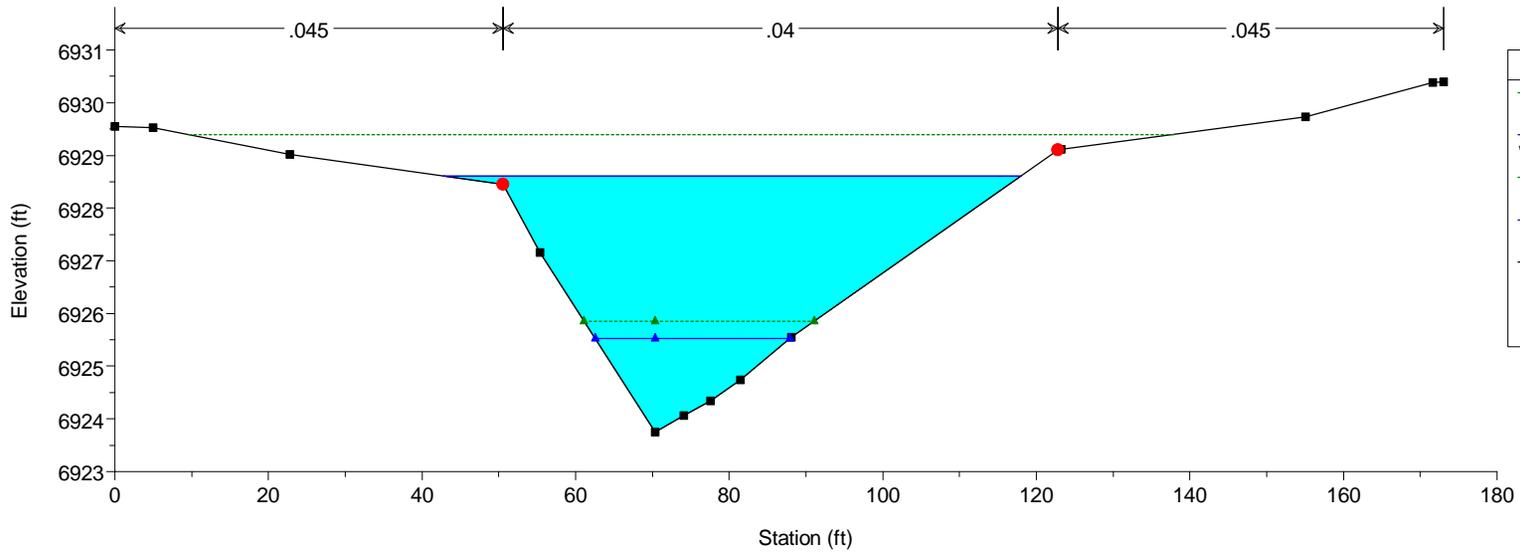


| Legend | |
|----------------|--|
| EG DBPS 100-YR | |
| WS DBPS 100-YR | |
| EG DBPS 2-YR | |
| WS DBPS 2-YR | |
| Ground | |
| Bank Sta | |


HEC-RAS Model Plan: Phase 1 10/21/2019

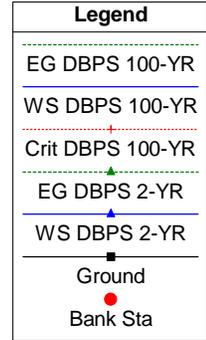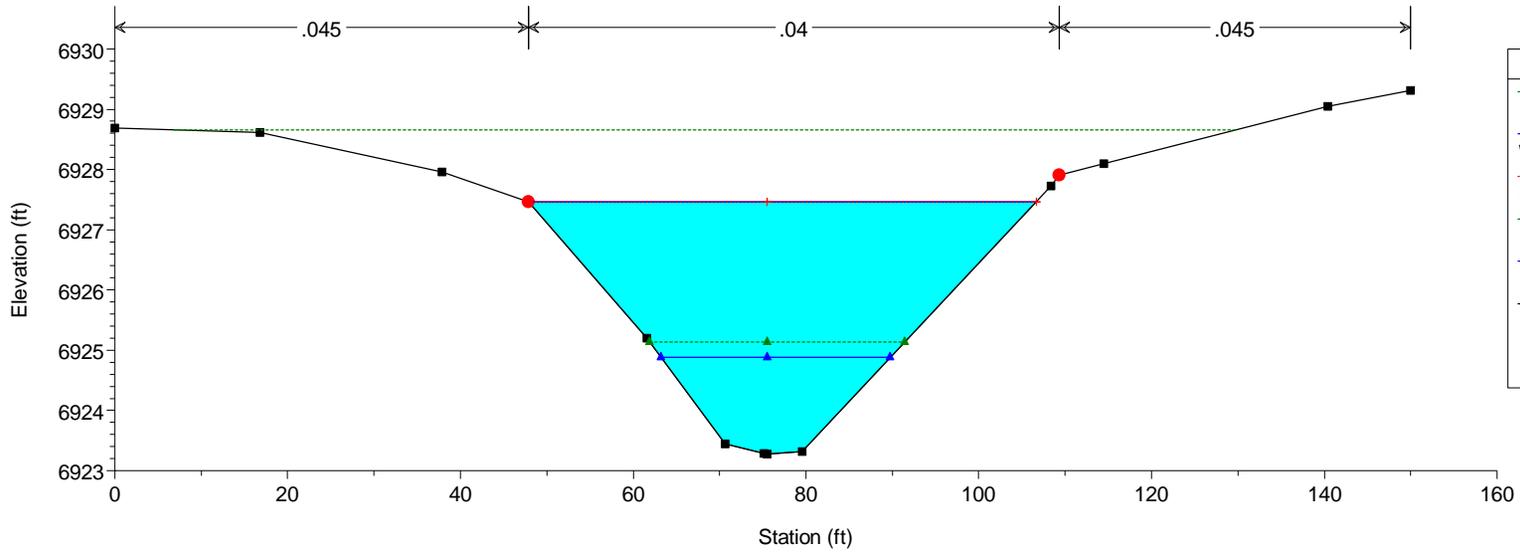


HEC-RAS Model Plan: Phase 1 10/21/2019

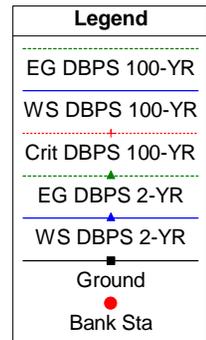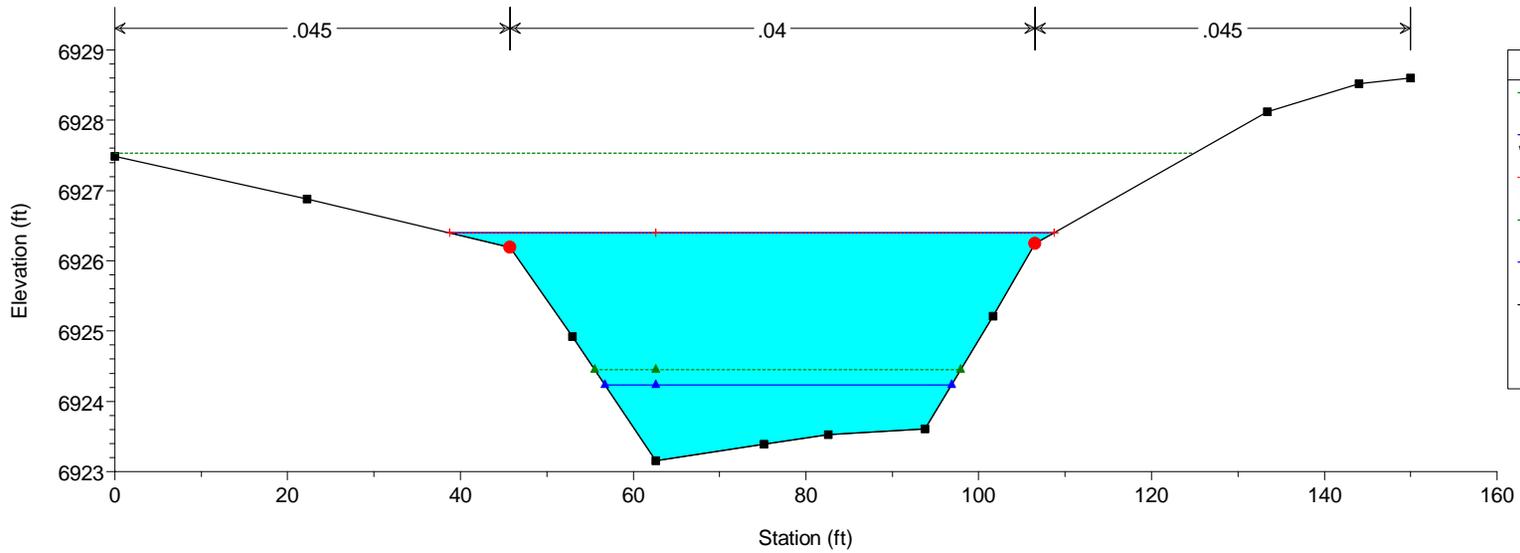



HEC-RAS Model Plan: Phase 1 10/21/2019

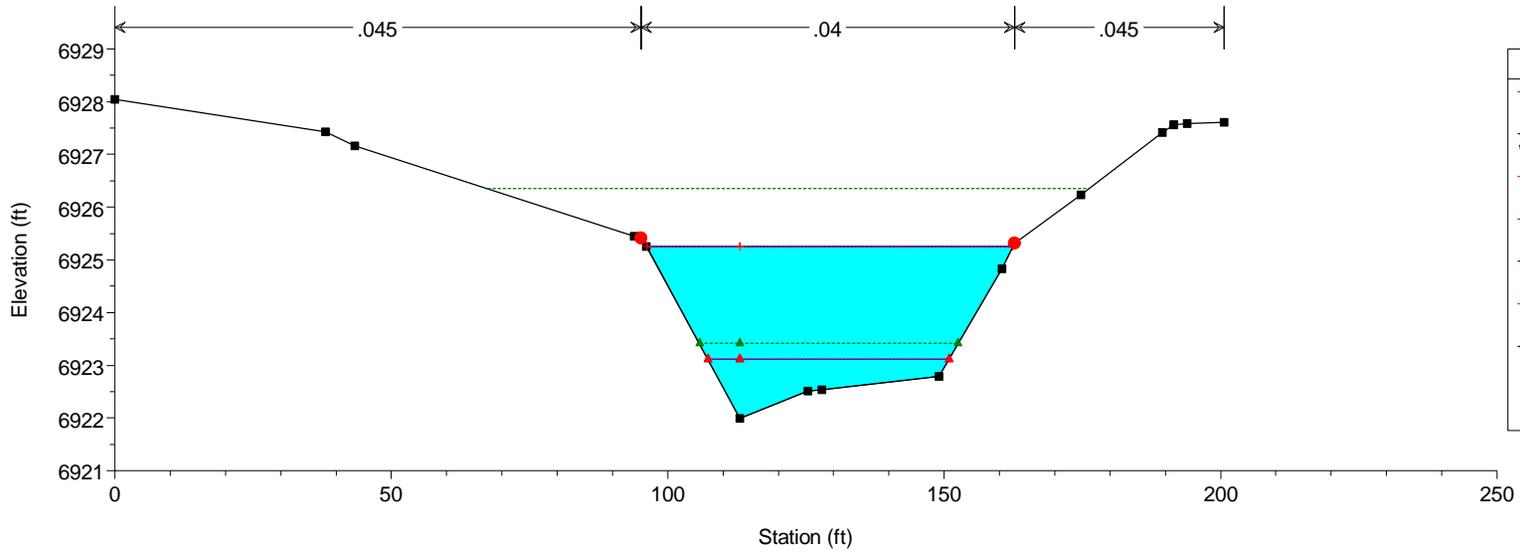



HEC-RAS Model Plan: Phase 1 10/21/2019

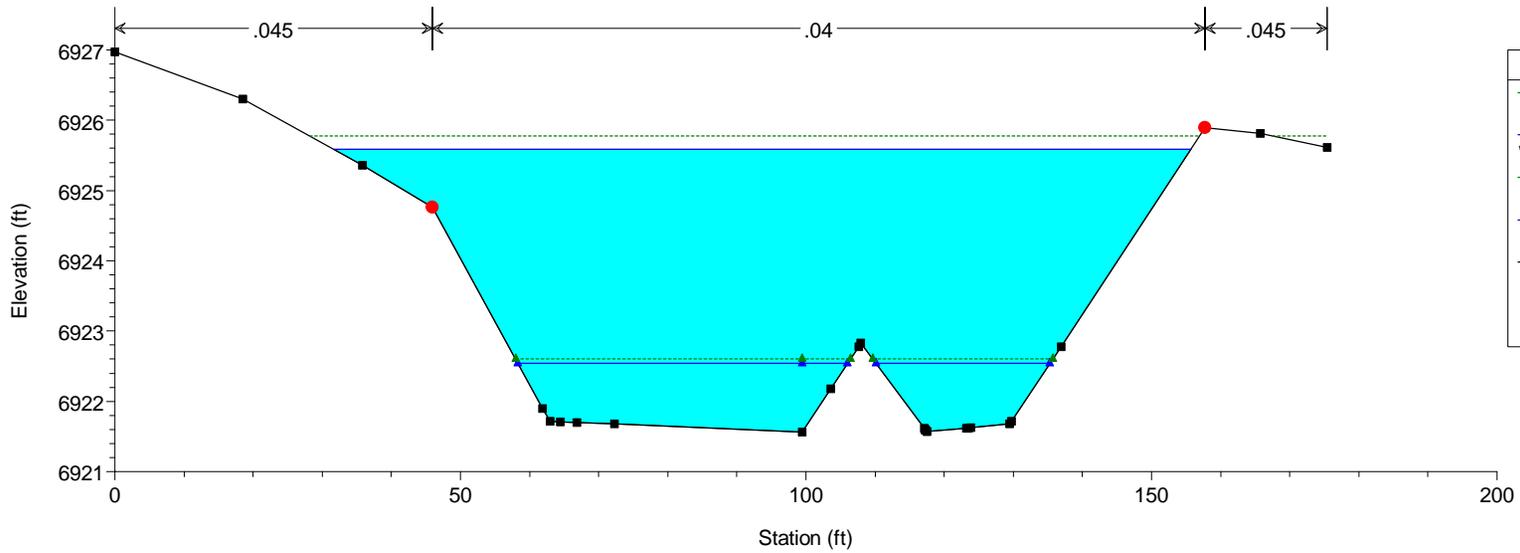


HEC-RAS Model Plan: Phase 1 10/21/2019

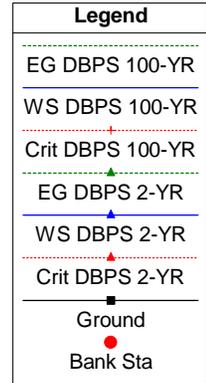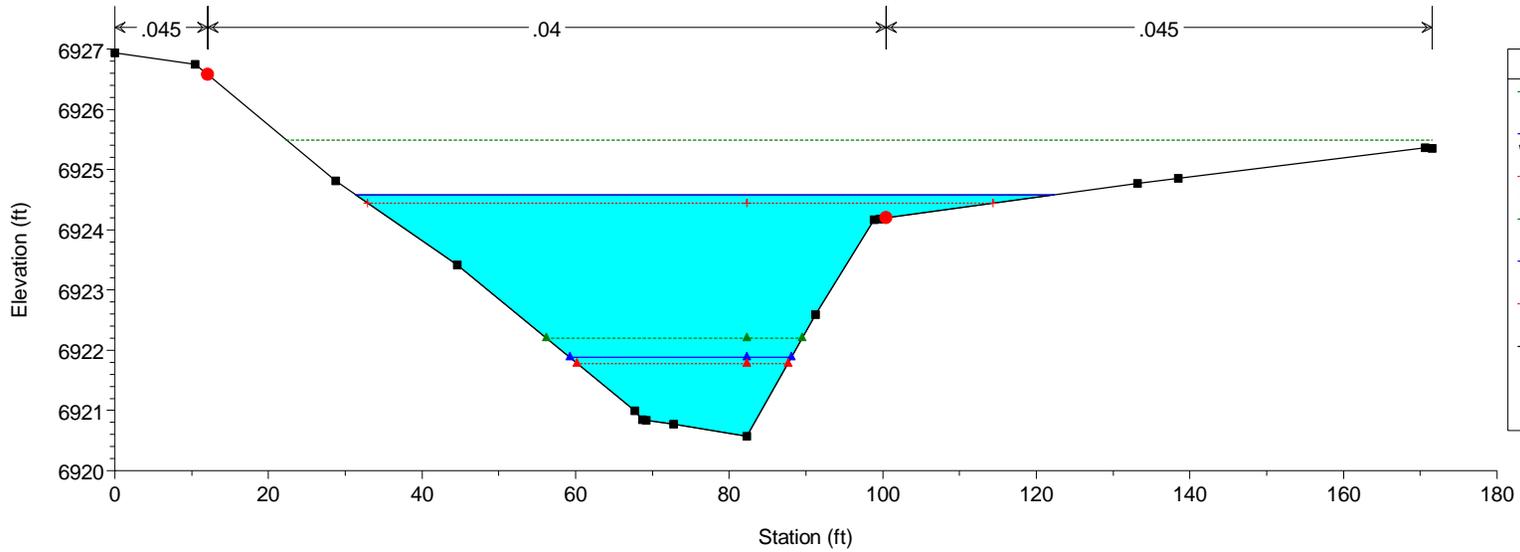


HEC-RAS Model Plan: Phase 1 10/21/2019

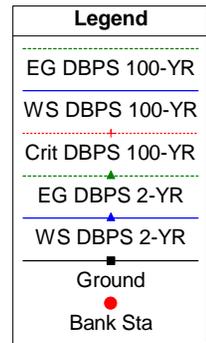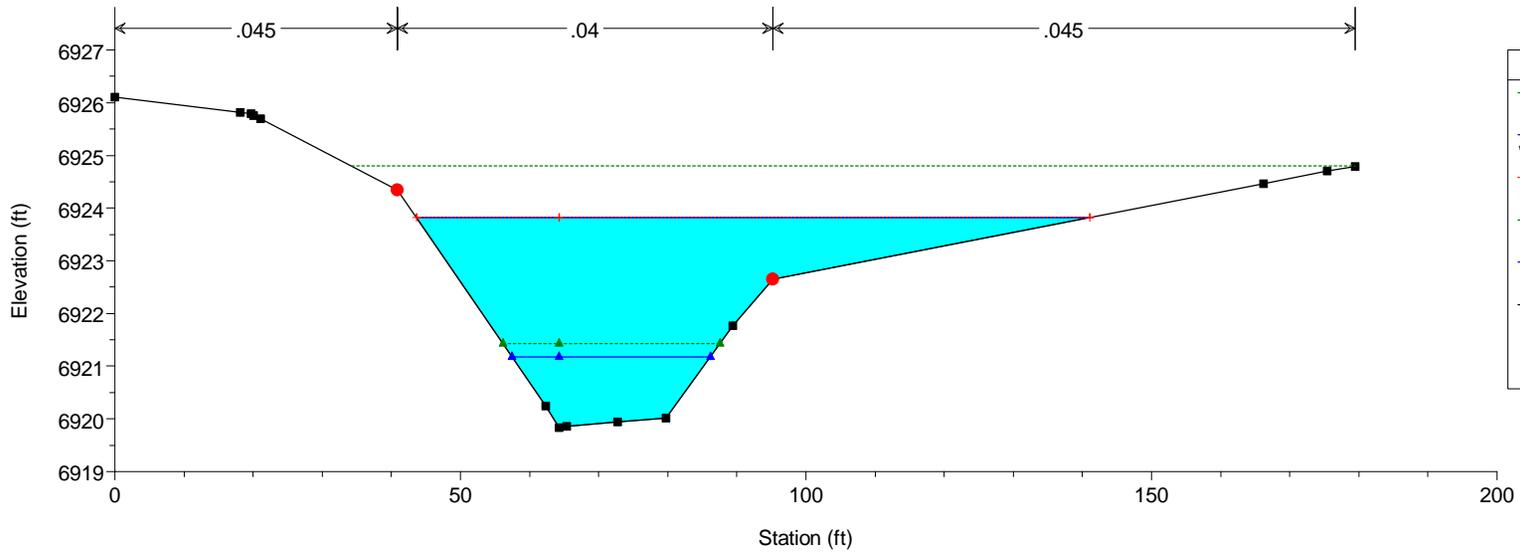



HEC-RAS Model Plan: Phase 1 10/21/2019

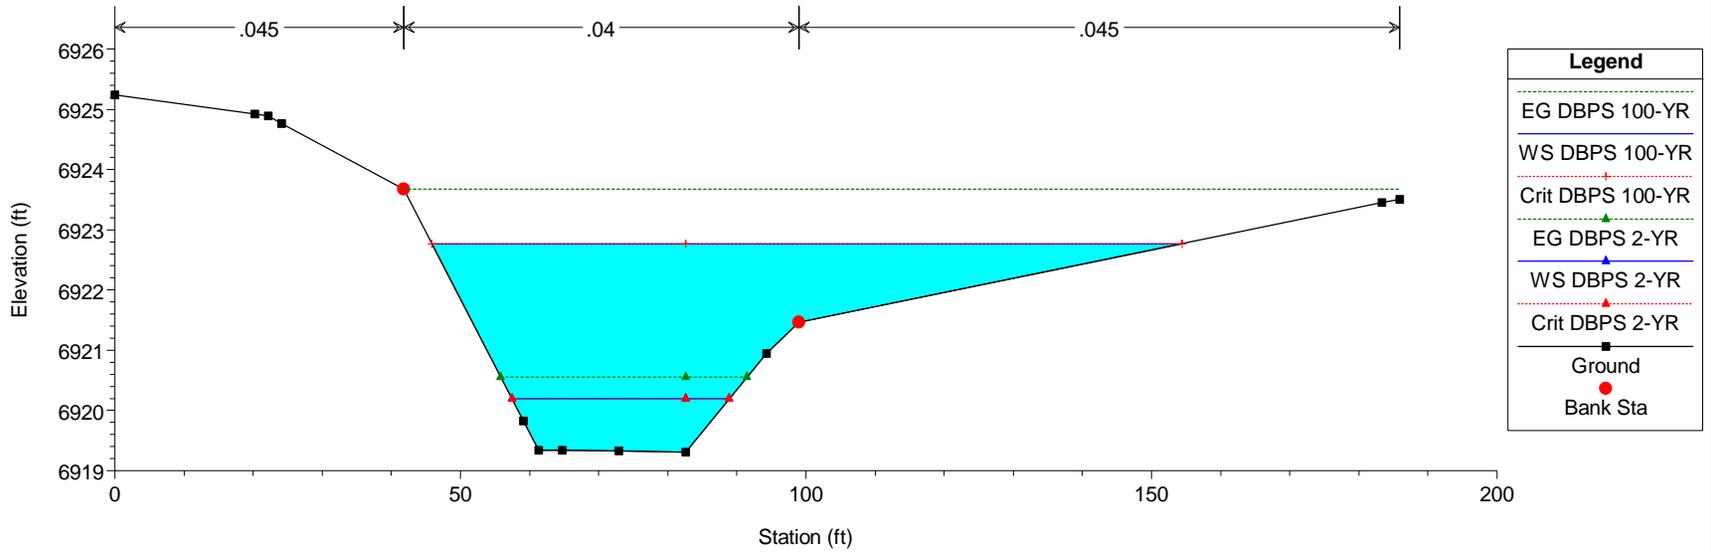



HEC-RAS Model Plan: Phase 1 10/21/2019

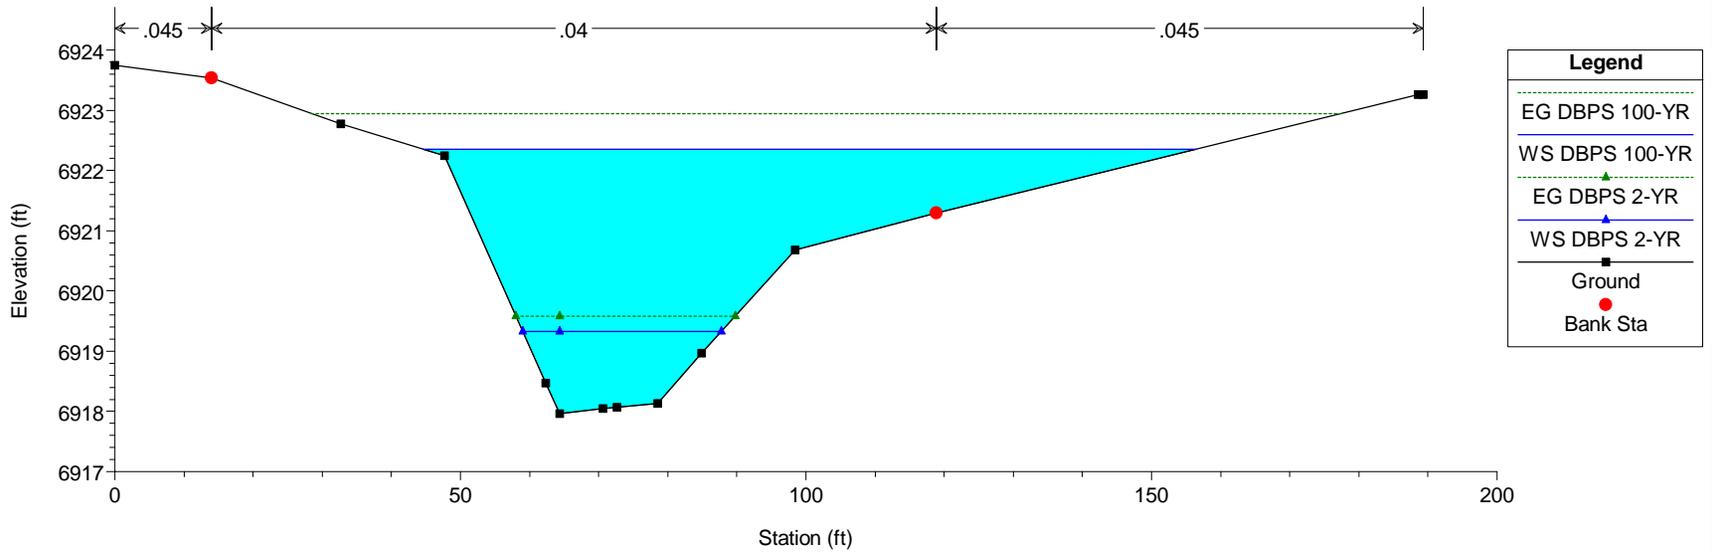


HEC-RAS Model Plan: Phase 1 10/21/2019

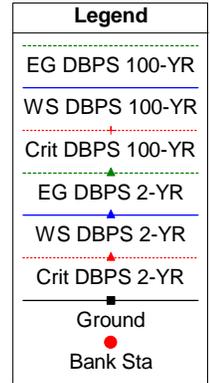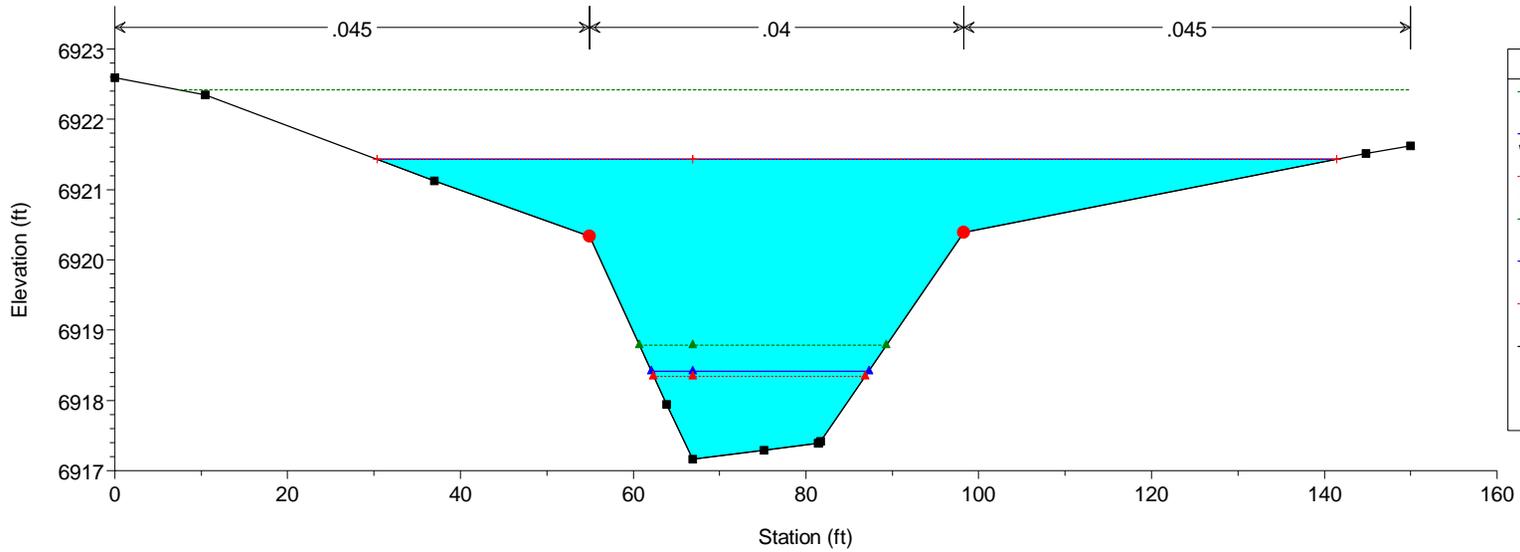


HEC-RAS Model Plan: Phase 1 10/21/2019

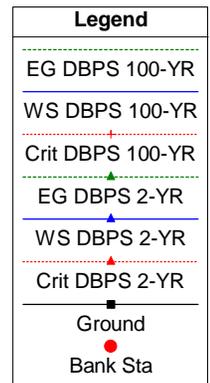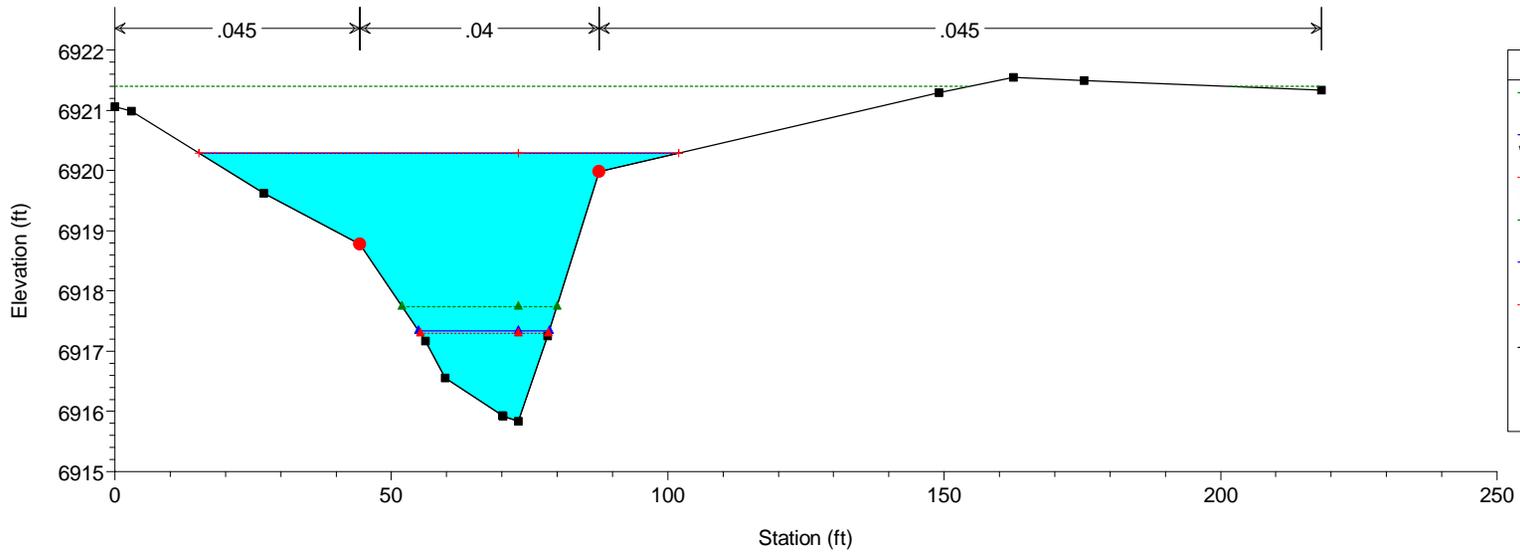


HEC-RAS Model Plan: Phase 1 10/21/2019

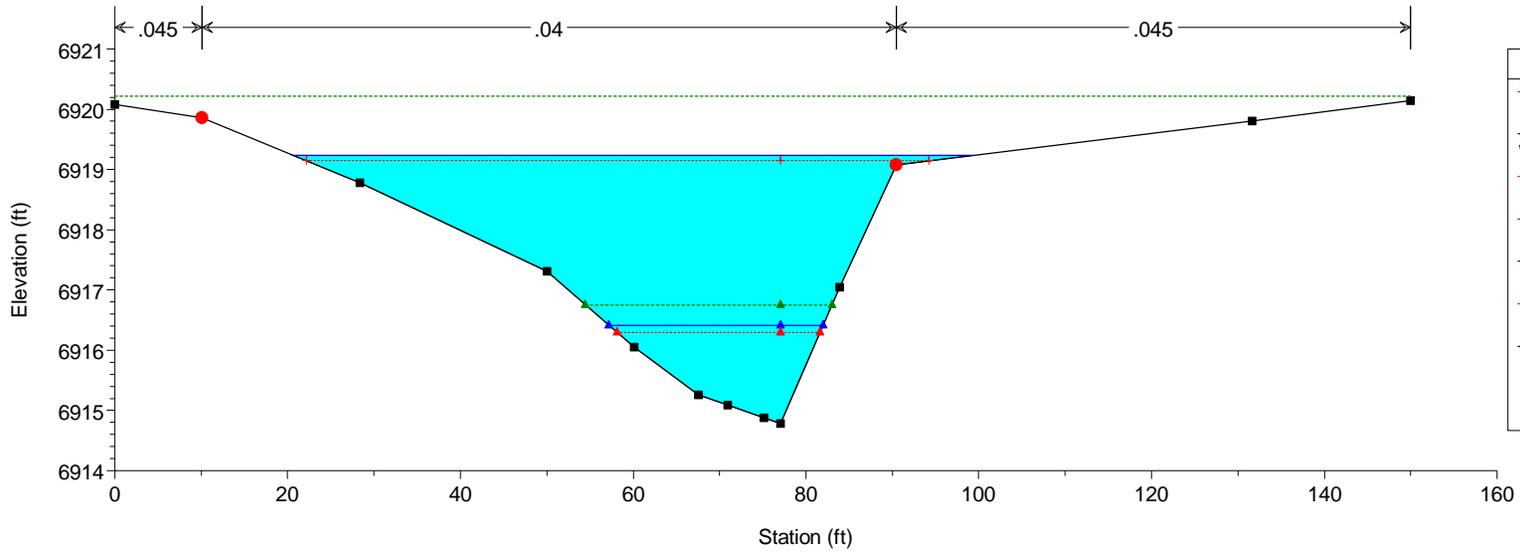


HEC-RAS Model Plan: Phase 1 10/21/2019

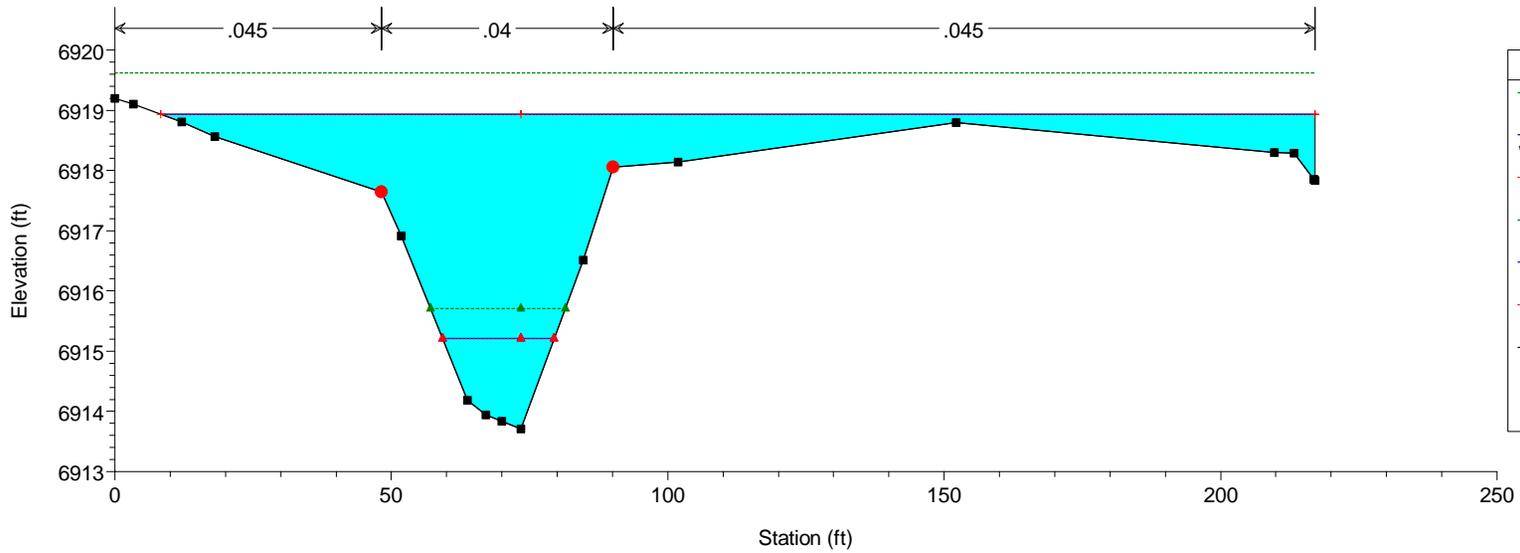



HEC-RAS Model Plan: Phase 1 10/21/2019

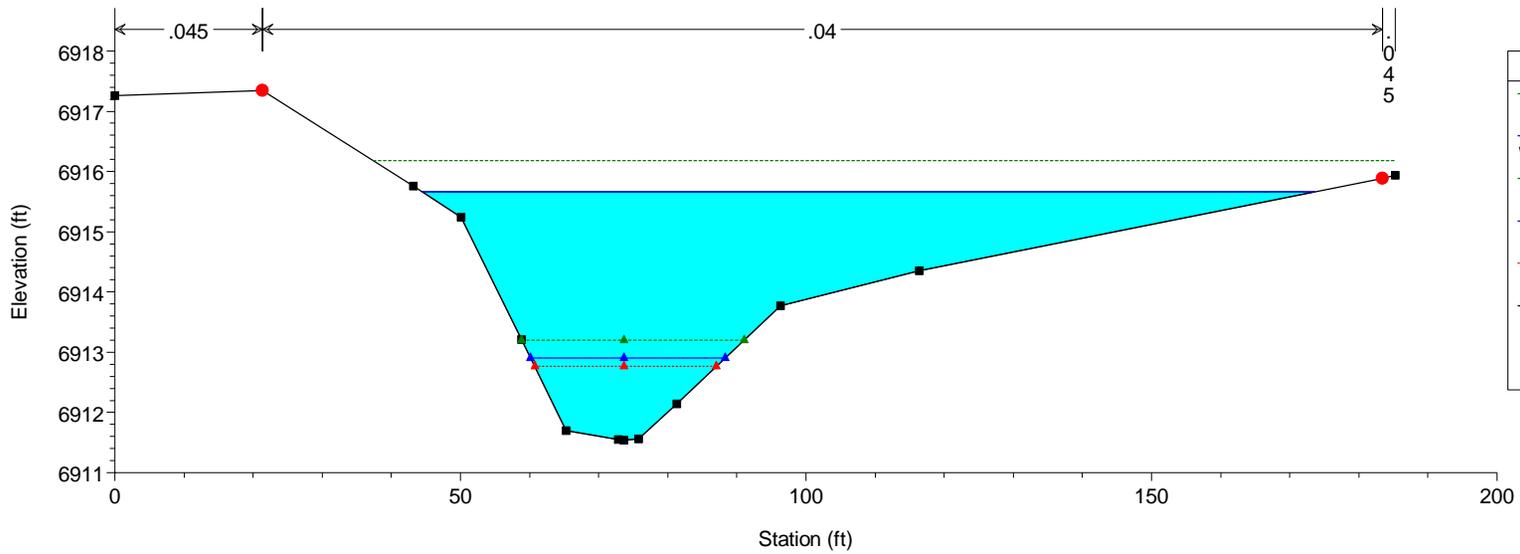



HEC-RAS Model Plan: Phase 1 10/21/2019

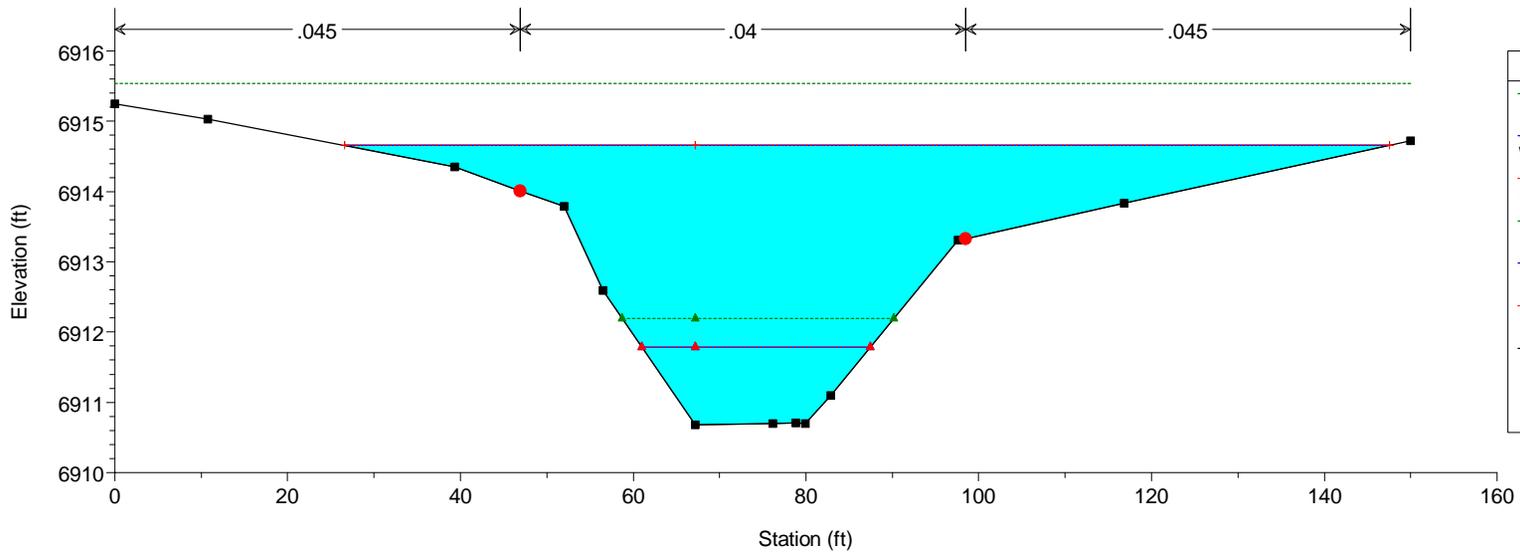


HEC-RAS Model Plan: Phase 1 10/21/2019

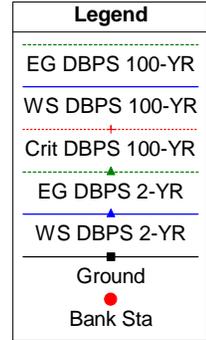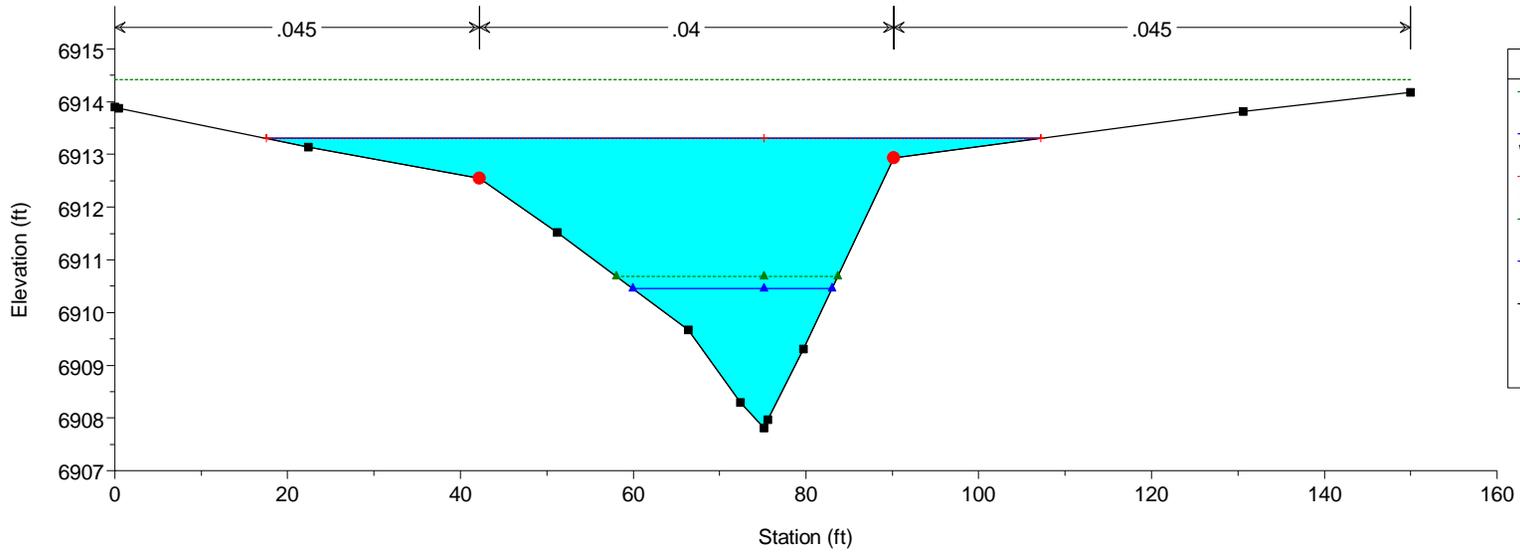


HEC-RAS Model Plan: Phase 1 10/21/2019

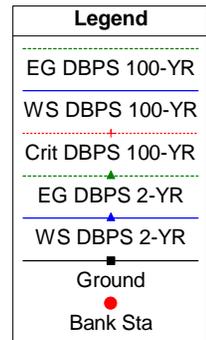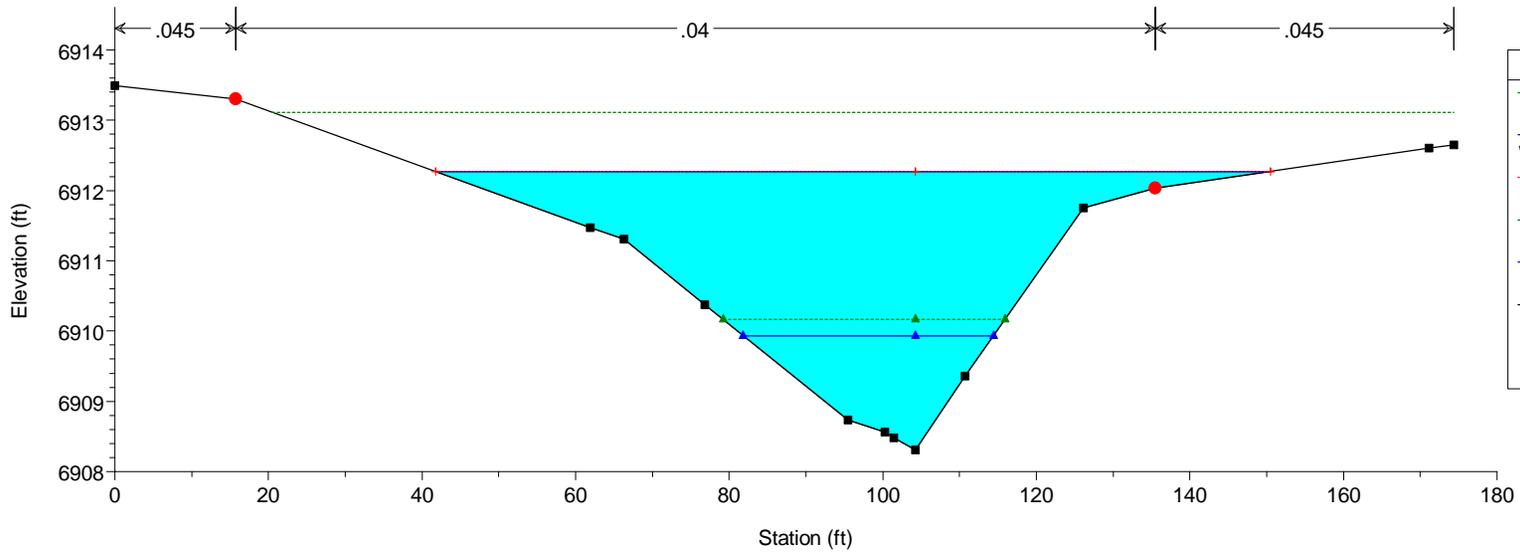


HEC-RAS Model Plan: Phase 1 10/21/2019

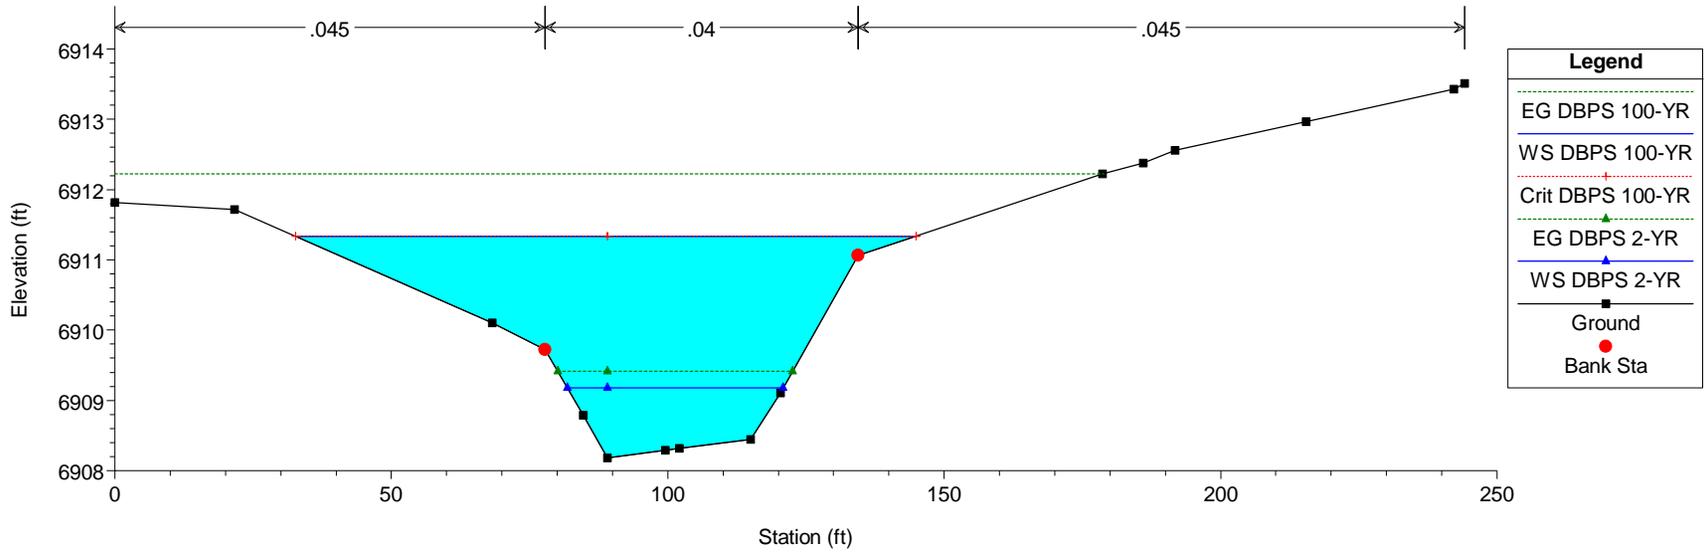


HEC-RAS Model Plan: Phase 1 10/21/2019

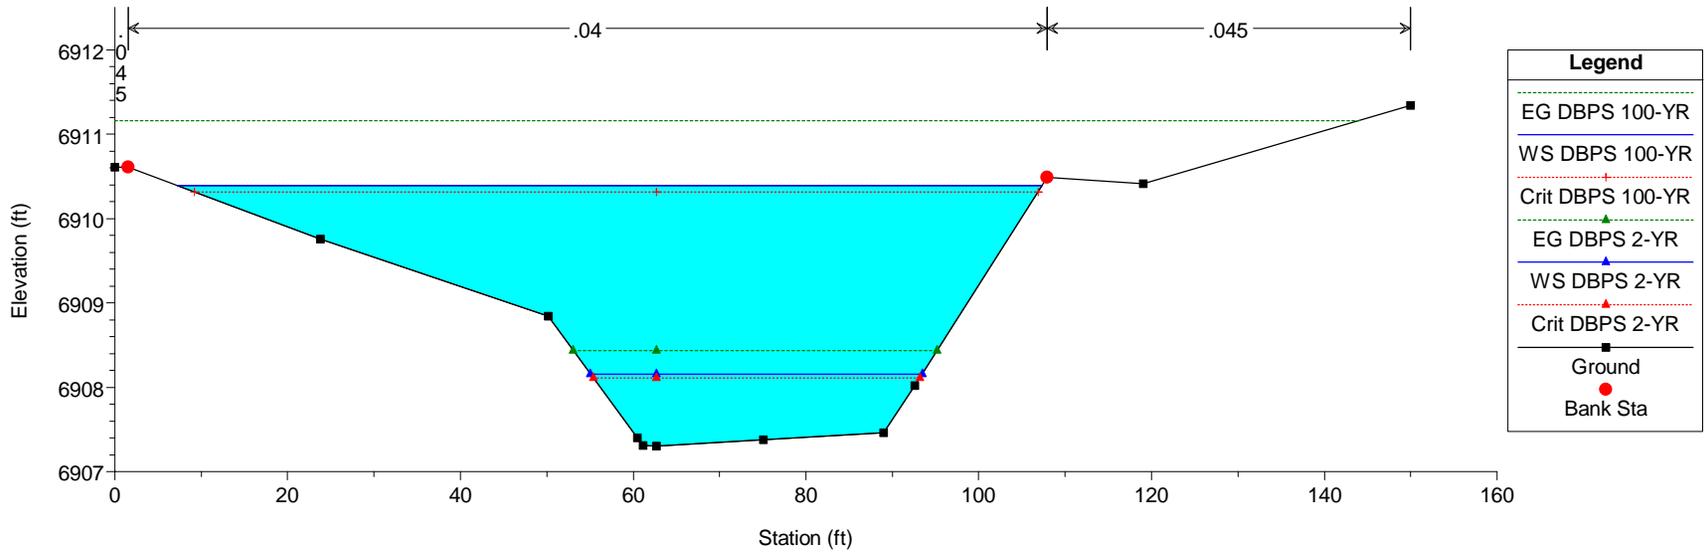



HEC-RAS Model Plan: Phase 1 10/21/2019

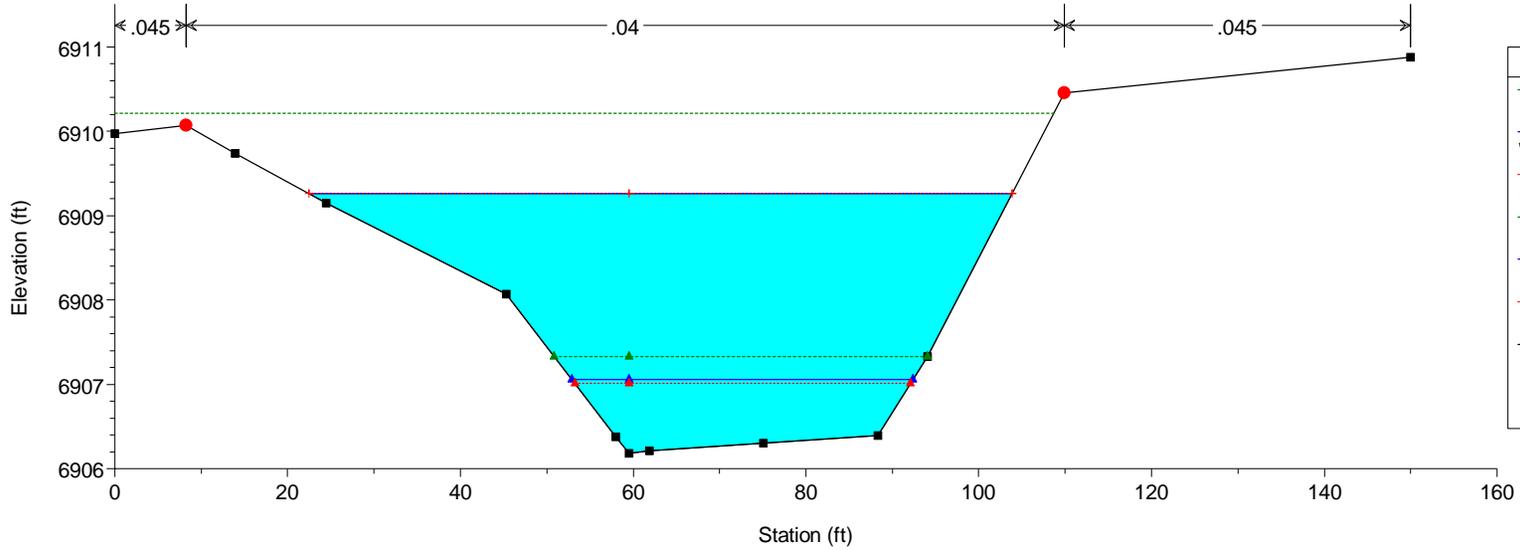



HEC-RAS Model Plan: Phase 1 10/21/2019

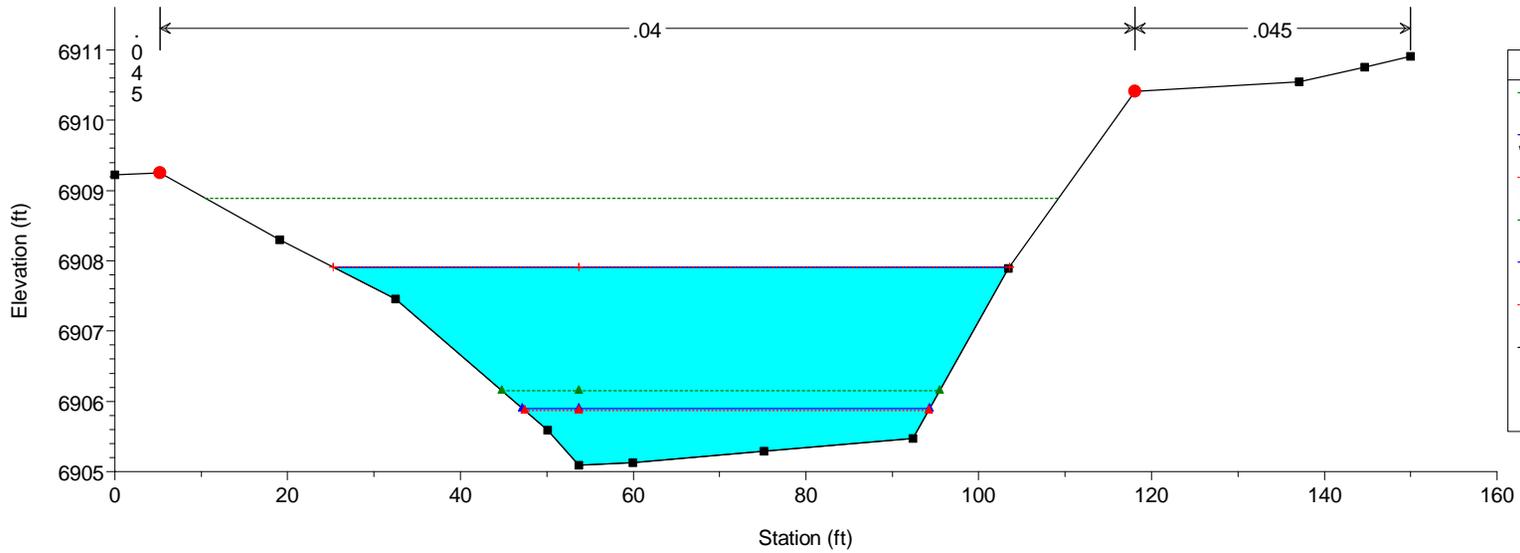



HEC-RAS Model Plan: Phase 1 10/21/2019

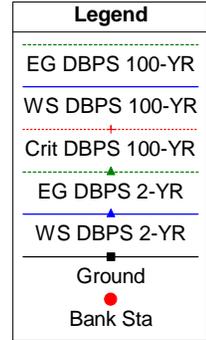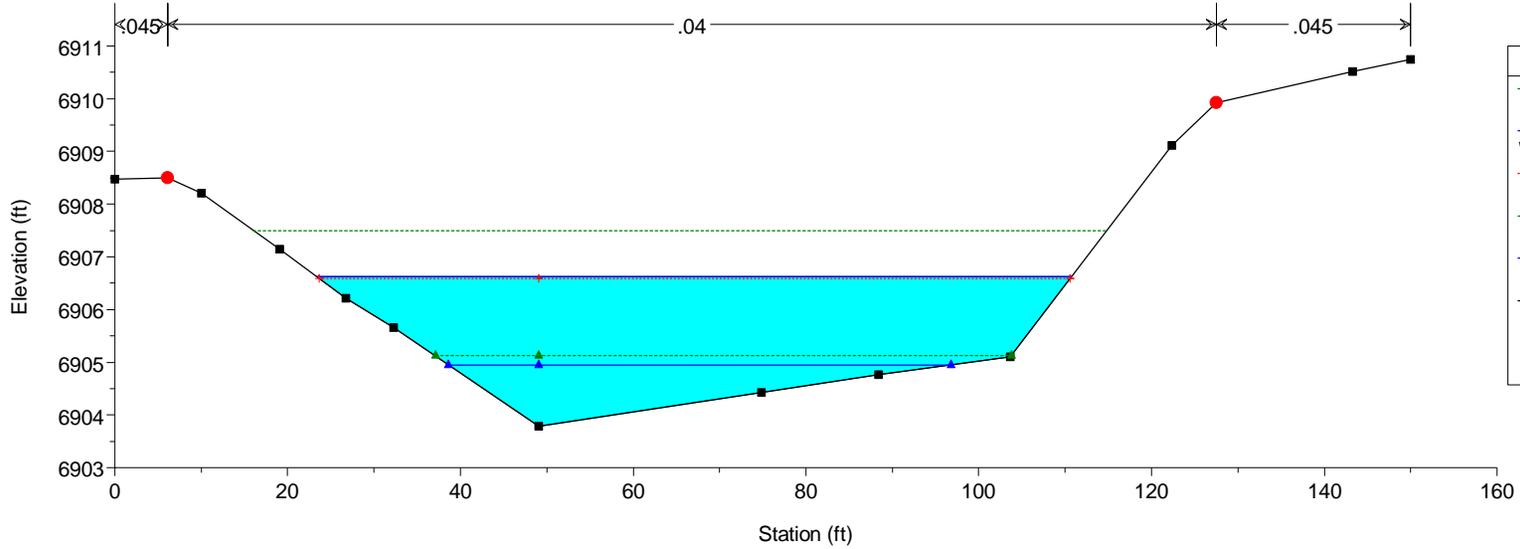



HEC-RAS Model Plan: Phase 1 10/21/2019

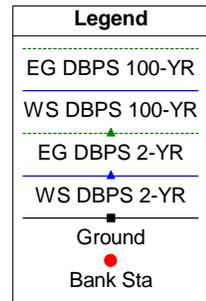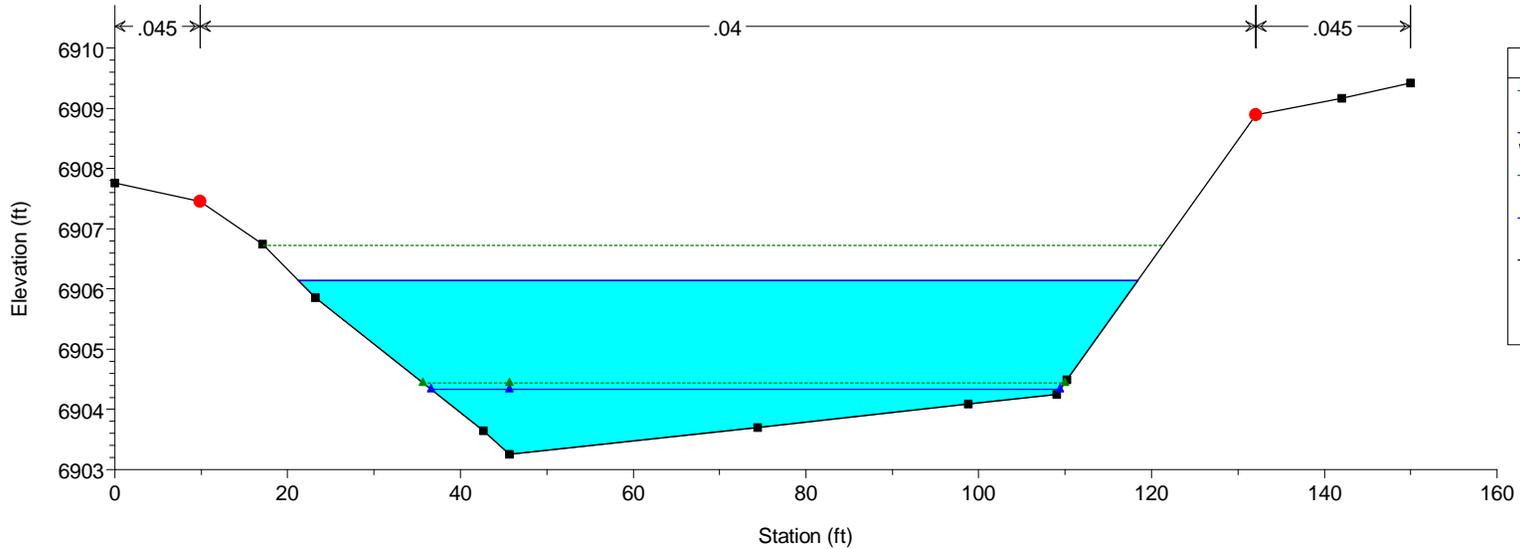


HEC-RAS Model Plan: Phase 1 10/21/2019

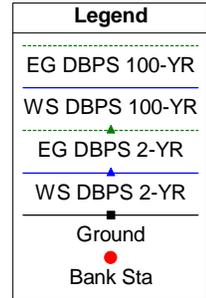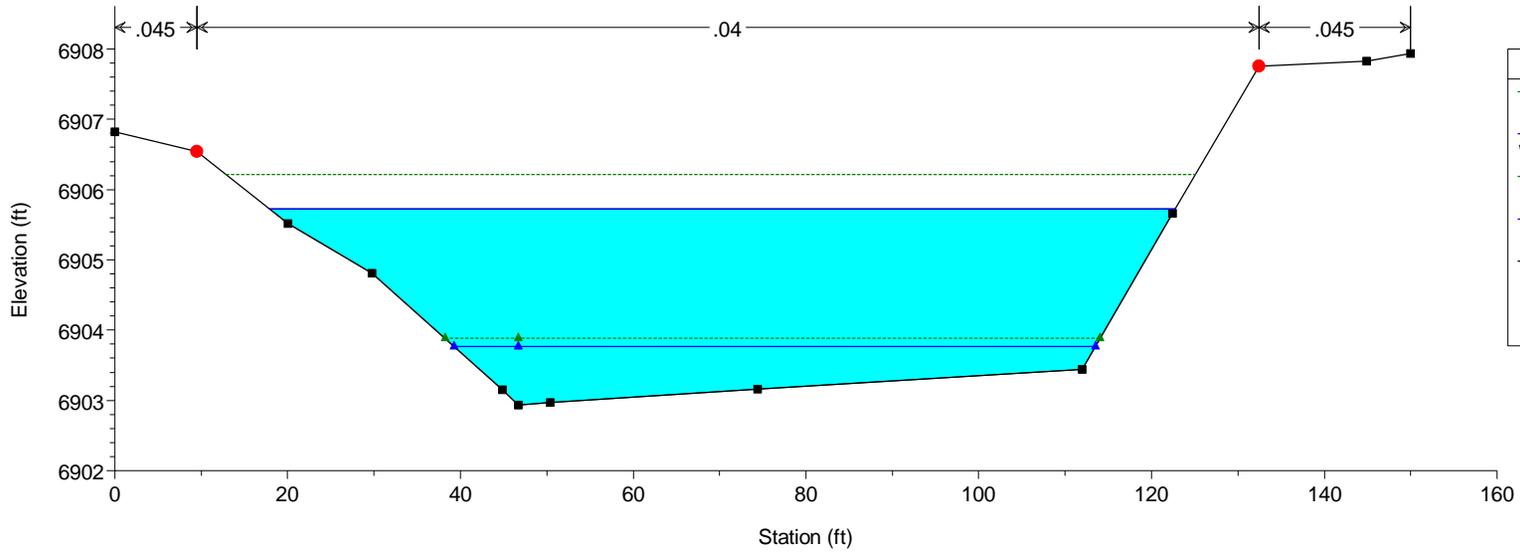

HEC-RAS Model Plan: Phase 1 10/21/2019

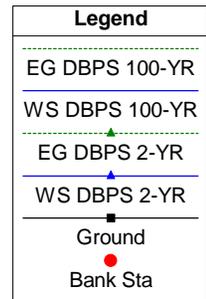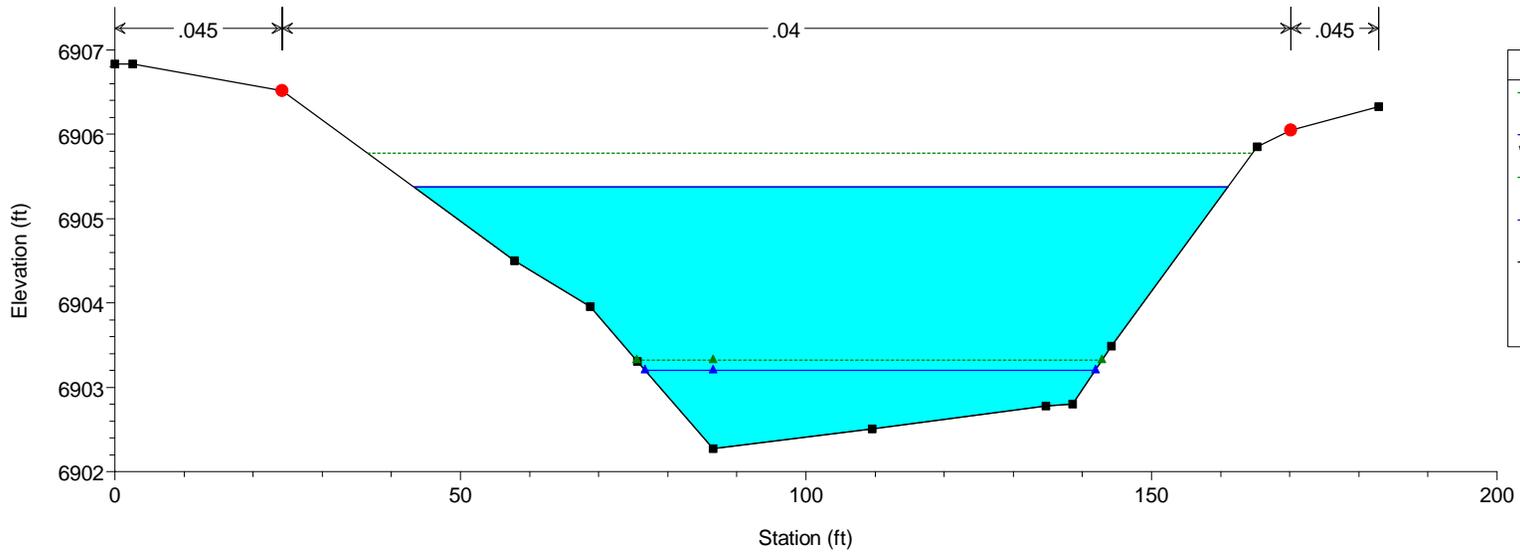


HEC-RAS Model Plan: Phase 1 10/21/2019

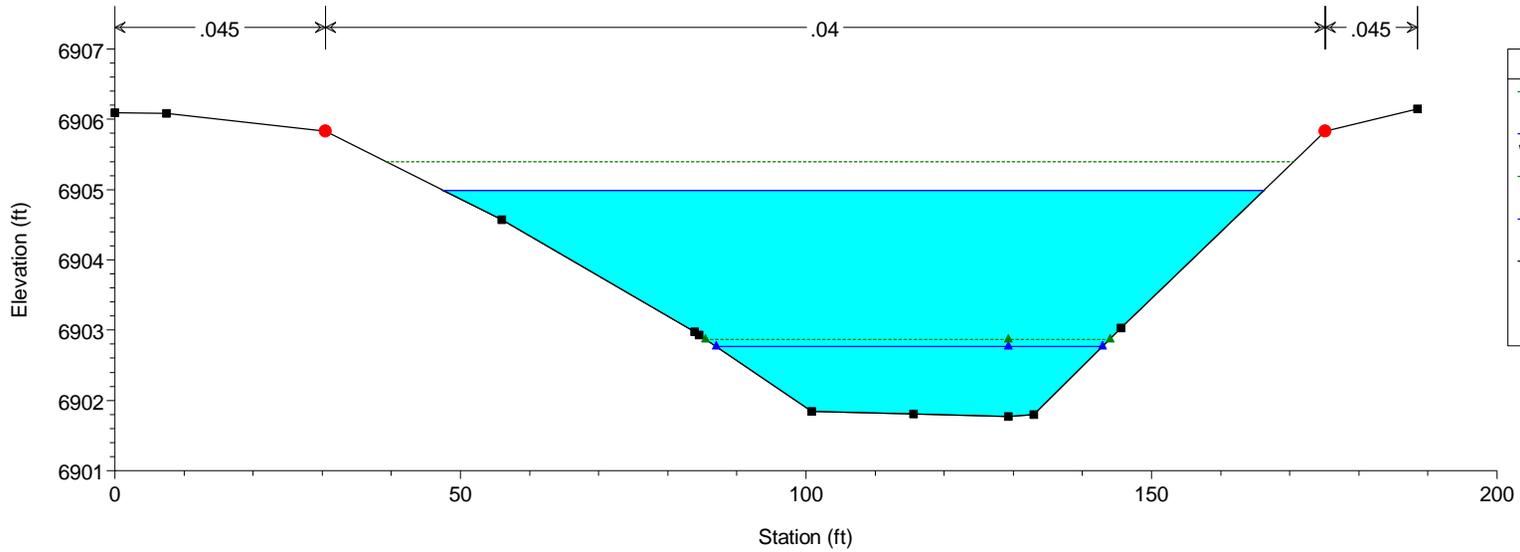



| Legend | |
|----------------|-----------------------|
| EG DBPS 100-YR | — (dotted green line) |
| WS DBPS 100-YR | — (solid blue line) |
| EG DBPS 2-YR | — (dotted green line) |
| WS DBPS 2-YR | — (solid blue line) |
| Ground | — (solid black line) |
| Bank Sta | ● (red dot) |

HEC-RAS Model Plan: Phase 1 10/21/2019


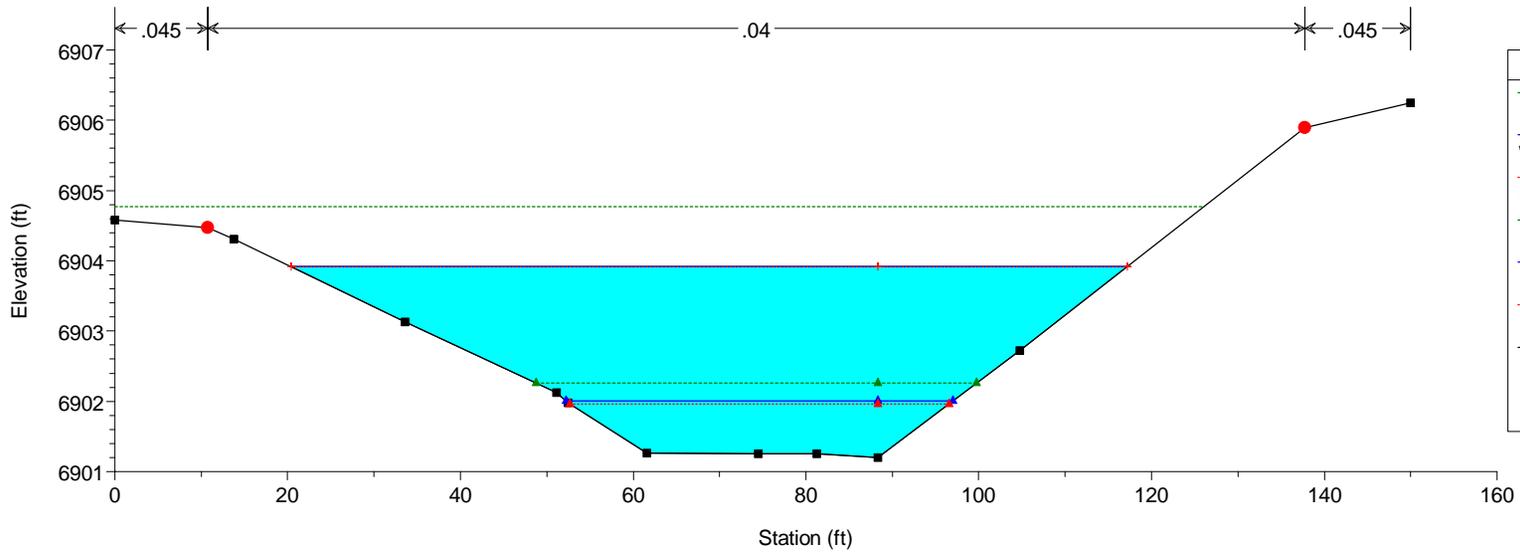


| Legend | |
|------------------|-----------------------|
| EG DBPS 100-YR | — (dotted green line) |
| WS DBPS 100-YR | — (solid blue line) |
| Crit DBPS 100-YR | — (red line with '+') |
| EG DBPS 2-YR | — (dotted green line) |
| WS DBPS 2-YR | — (solid blue line) |
| Crit DBPS 2-YR | — (red line with '+') |
| Ground | — (solid black line) |
| Bank Sta | ● (red dot) |


HEC-RAS Model Plan: Phase 1 10/21/2019

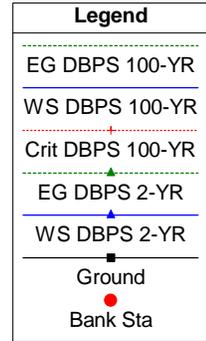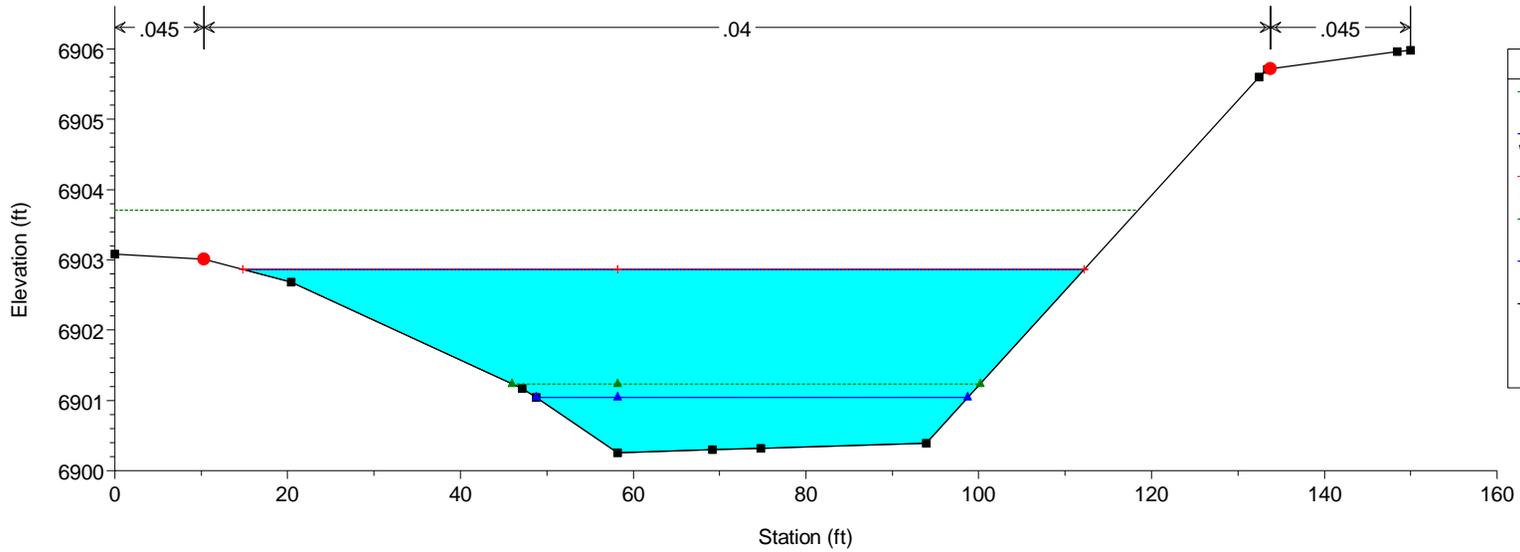


HEC-RAS Model Plan: Phase 1 10/21/2019

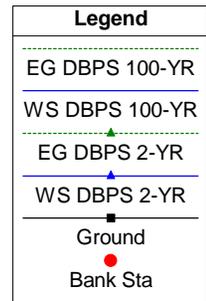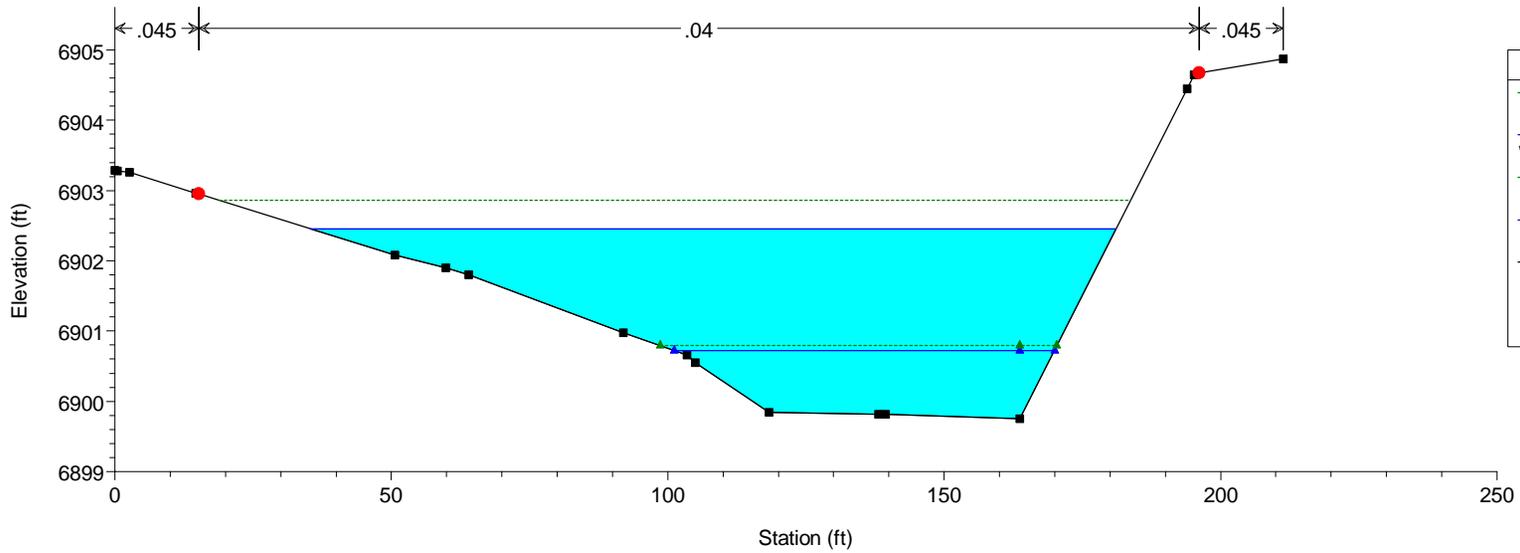



HEC-RAS Model Plan: Phase 1 10/21/2019

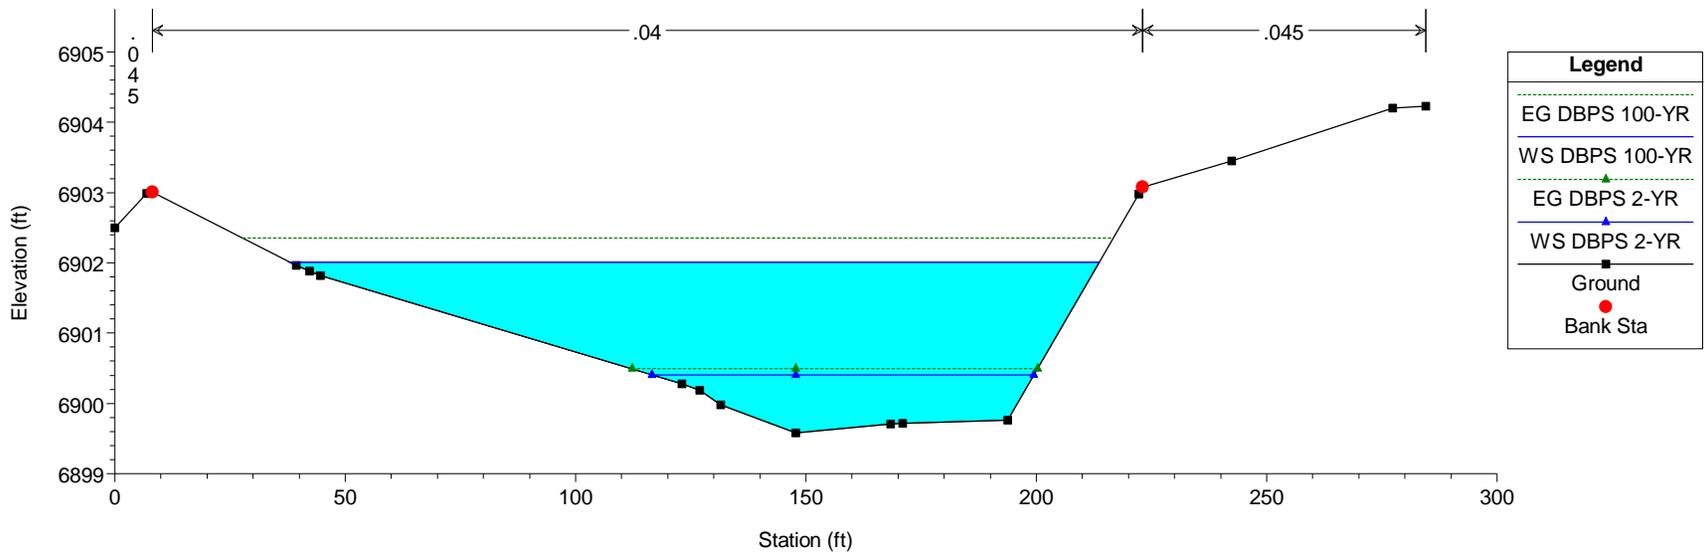



HEC-RAS Model Plan: Phase 1 10/21/2019

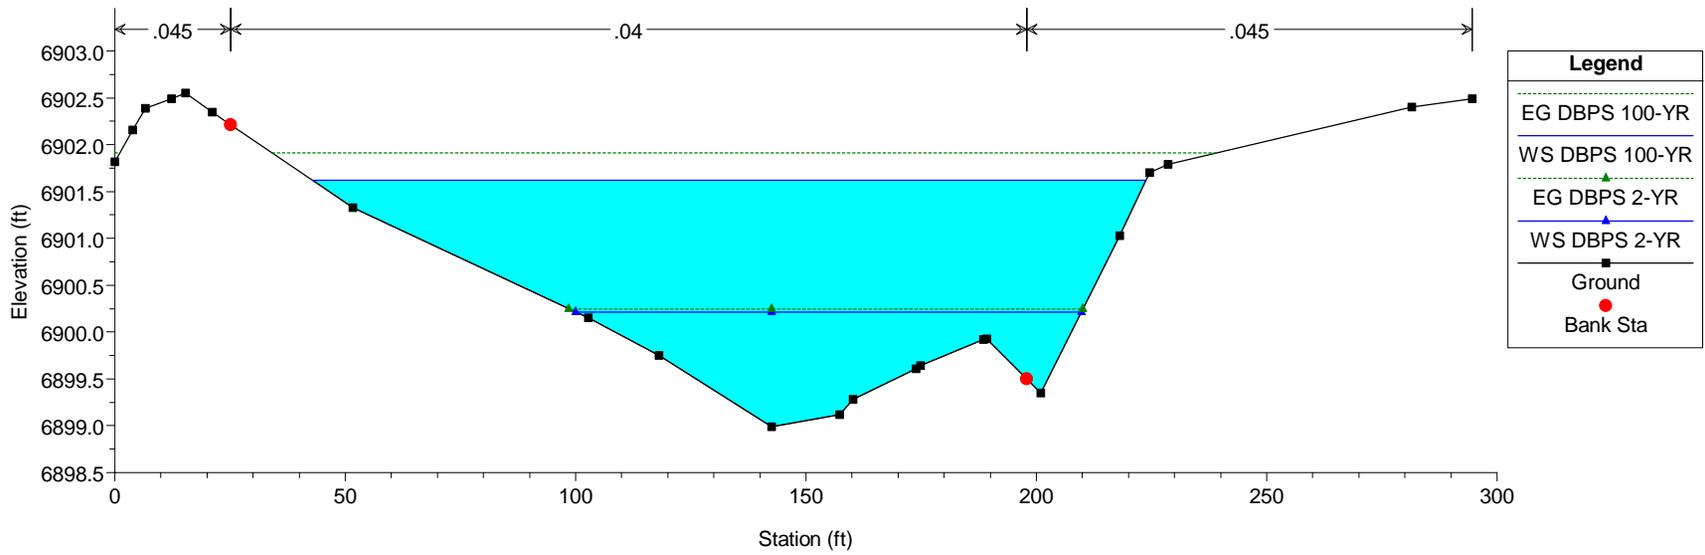



HEC-RAS Model Plan: Phase 1 10/21/2019

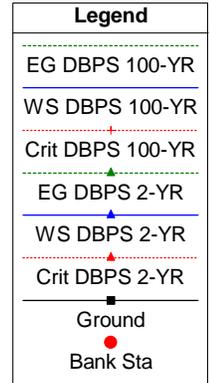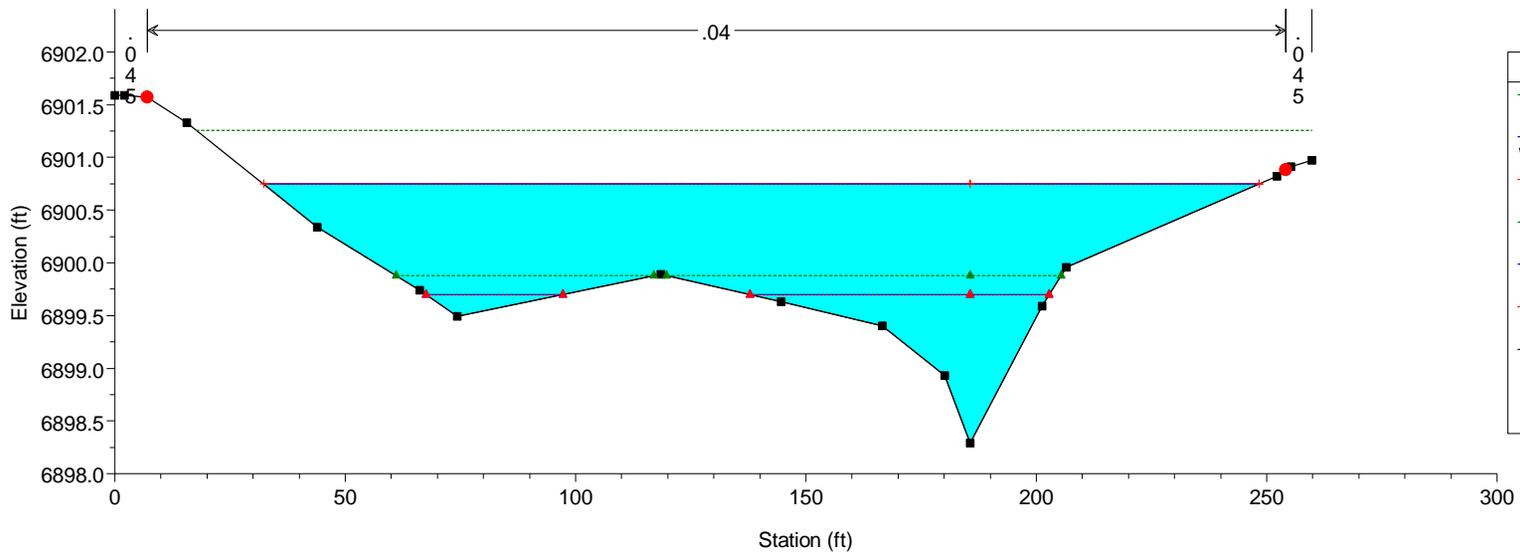



HEC-RAS Model Plan: Phase 1 10/21/2019

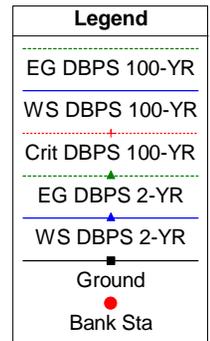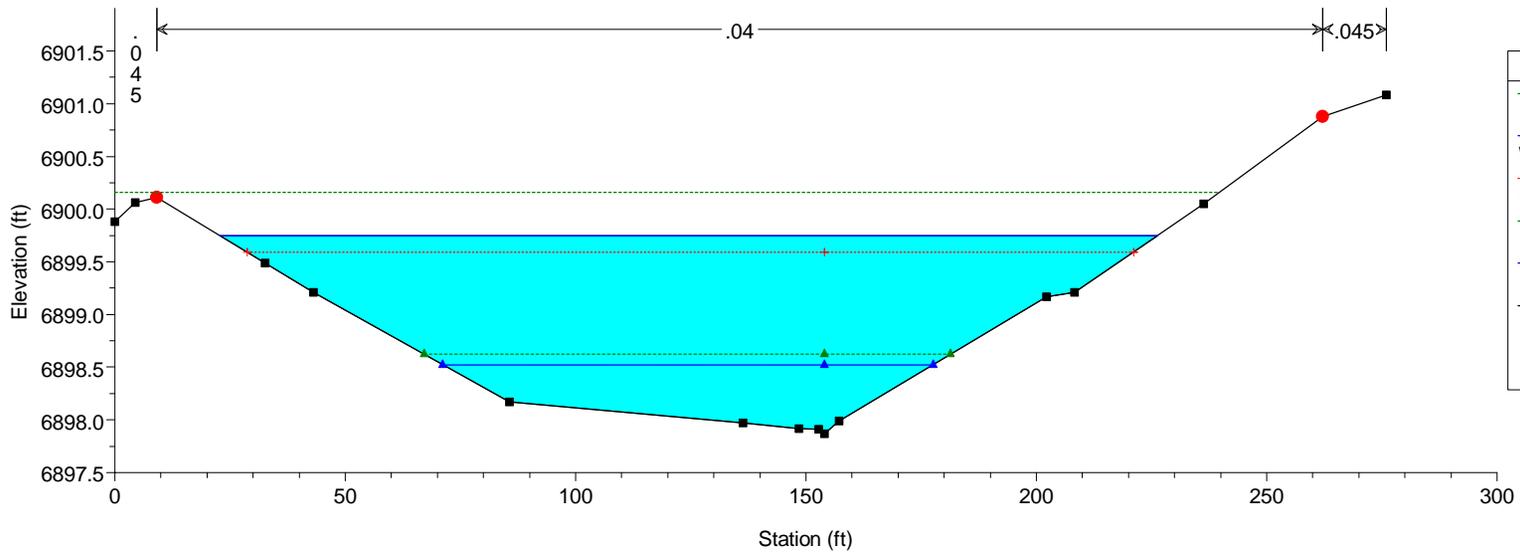



HEC-RAS Model Plan: Phase 1 10/21/2019

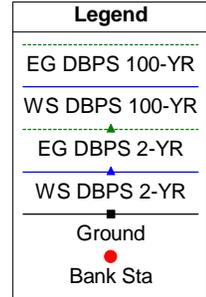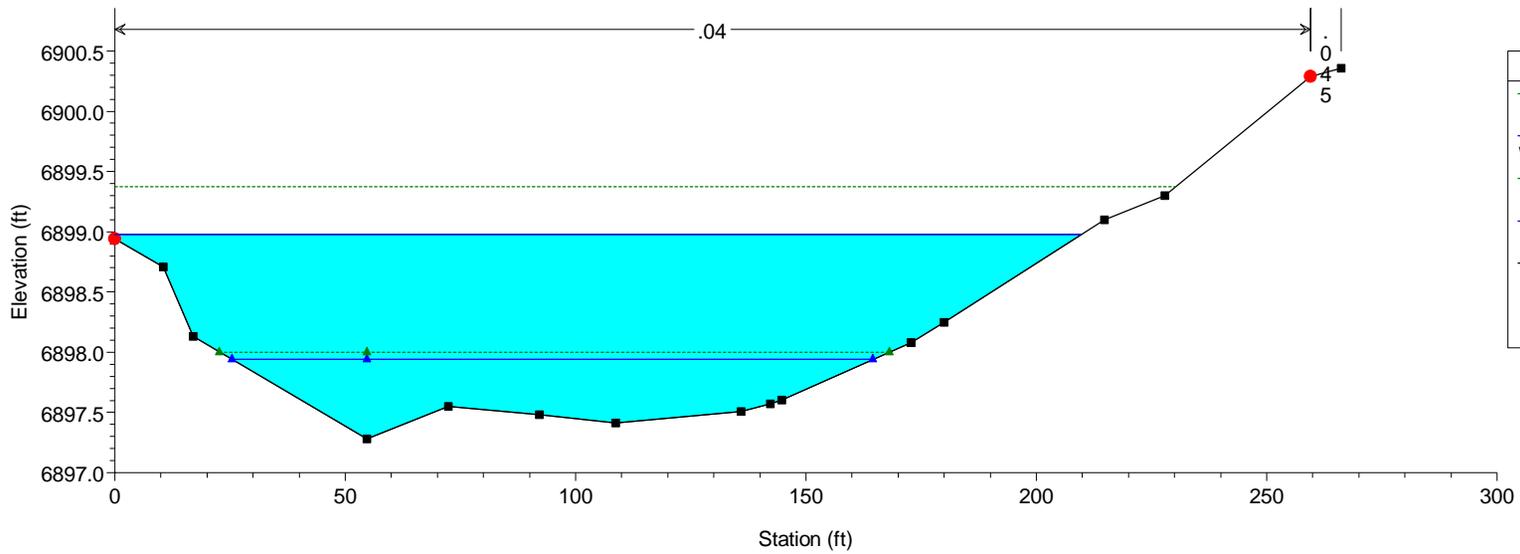



HEC-RAS Model Plan: Phase 1 10/21/2019

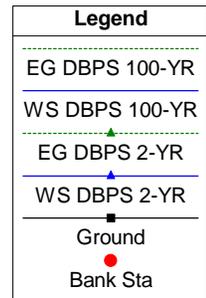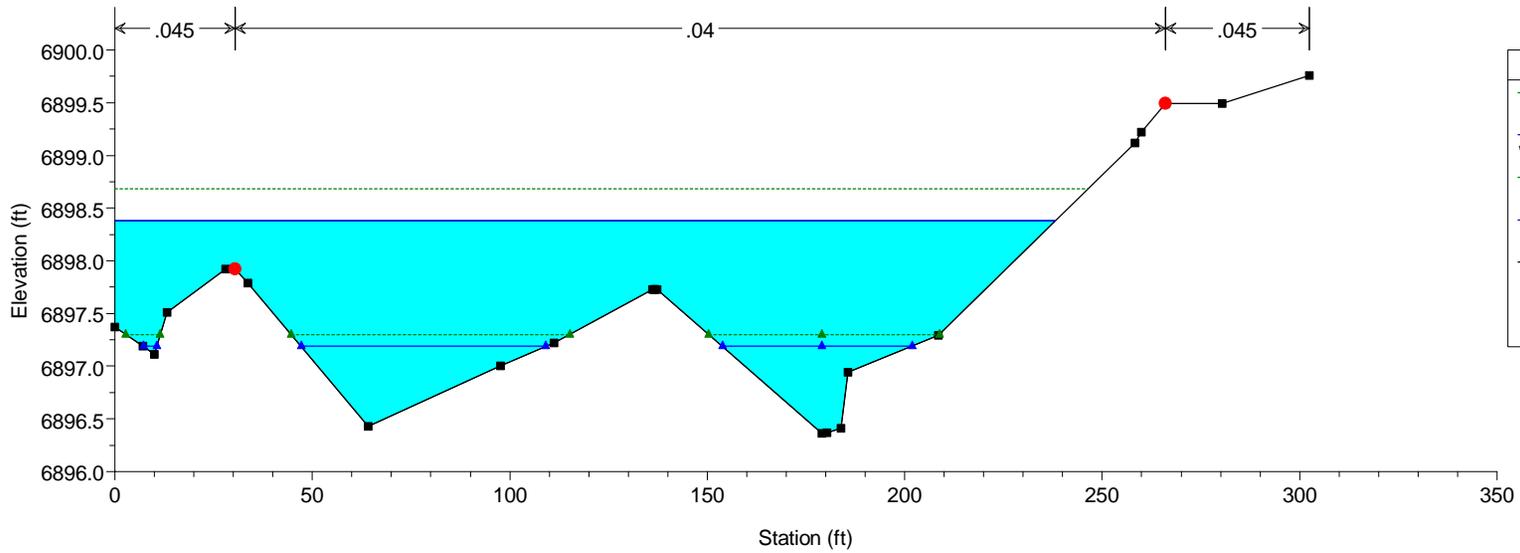



HEC-RAS Model Plan: Phase 1 10/21/2019

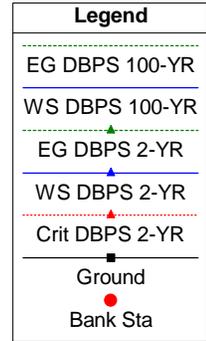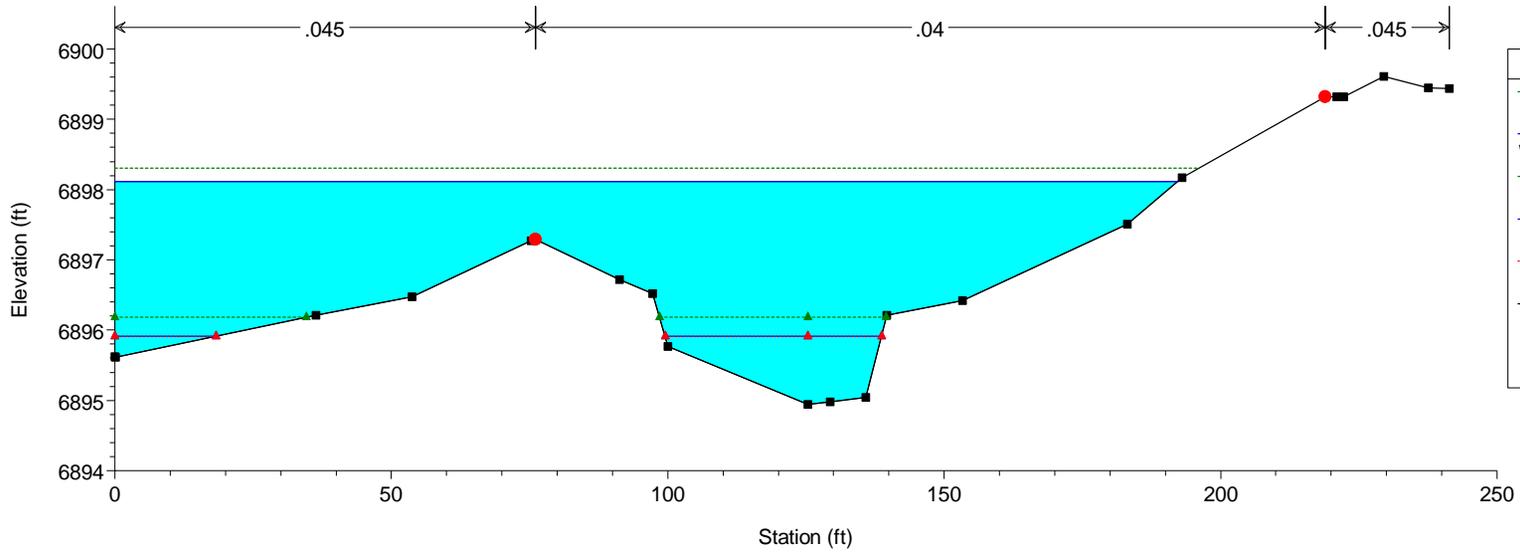



HEC-RAS Model Plan: Phase 1 10/21/2019

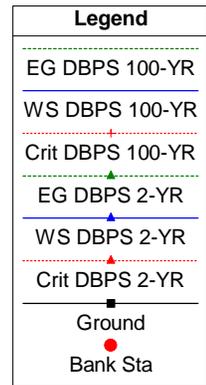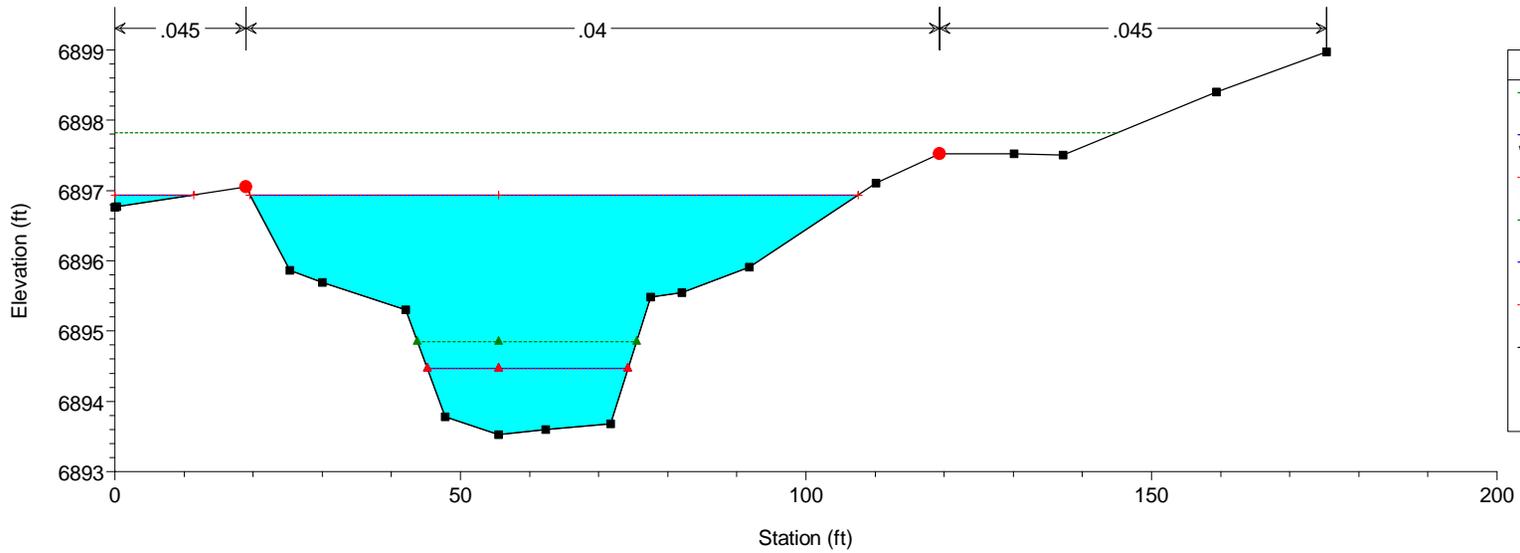



HEC-RAS Model Plan: Phase 1 10/21/2019

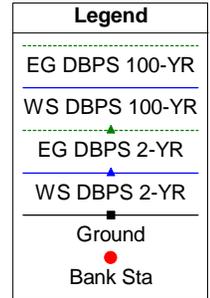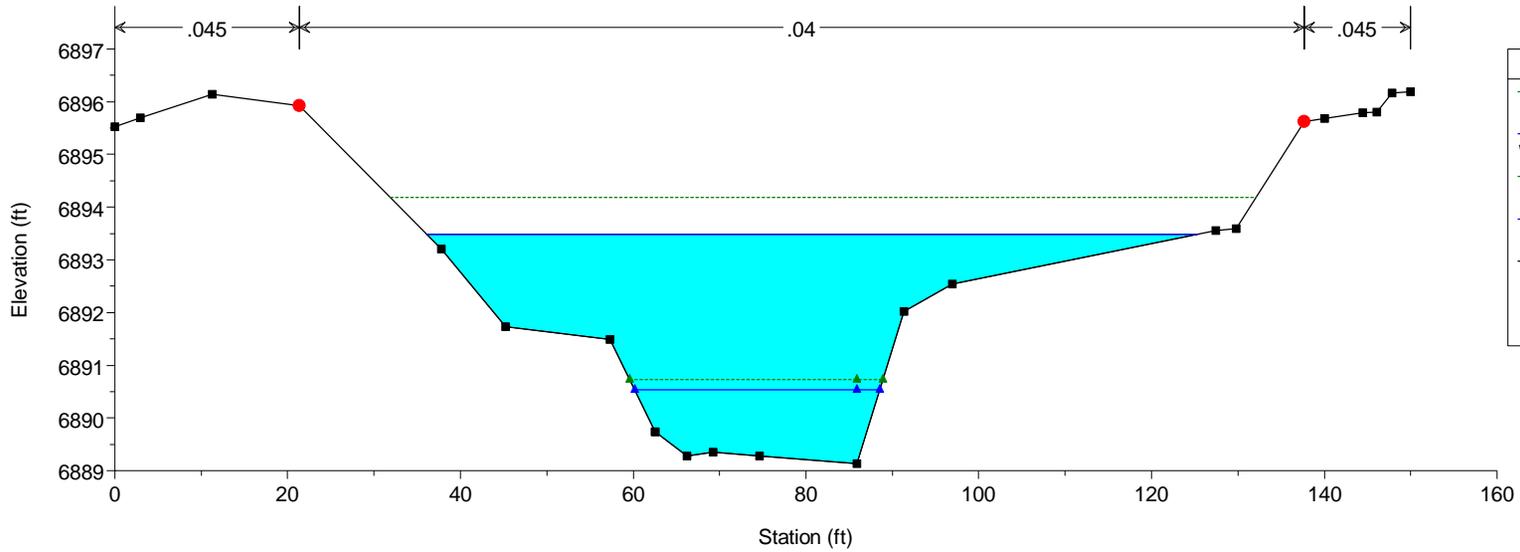



HEC-RAS Model Plan: Phase 1 10/21/2019

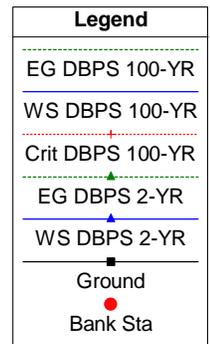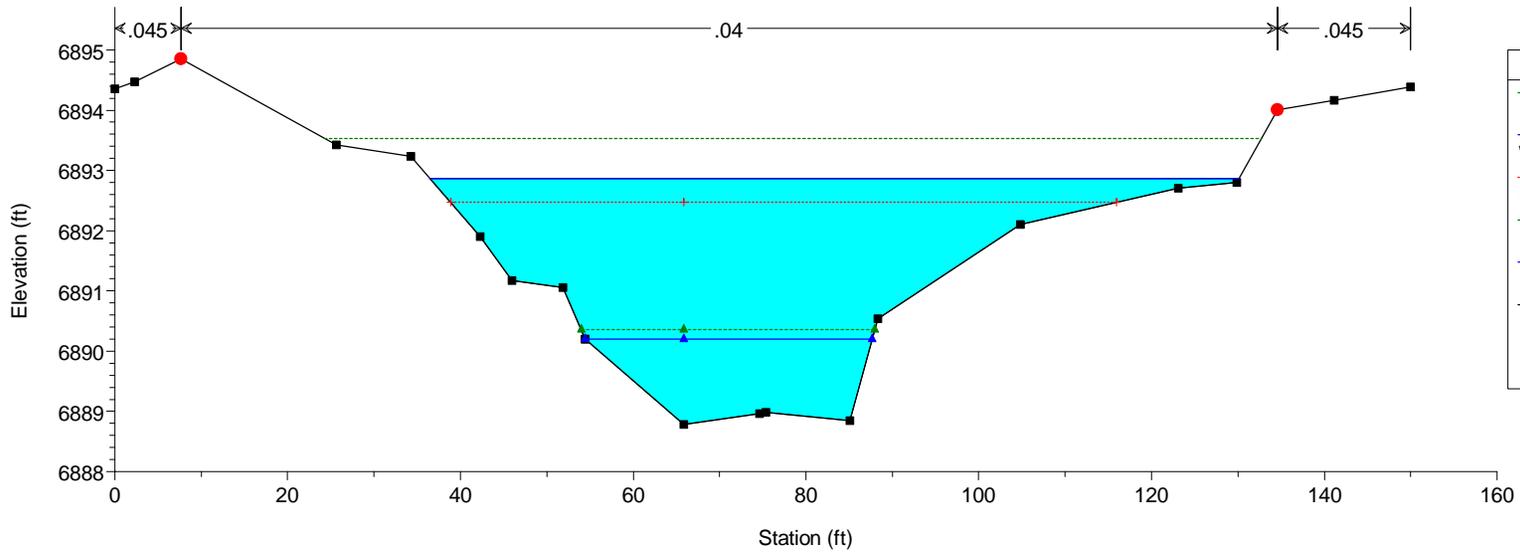


HEC-RAS Model Plan: Phase 1 10/21/2019

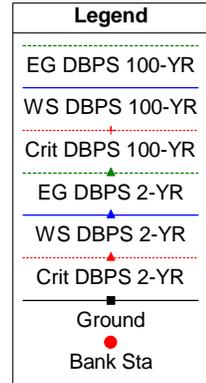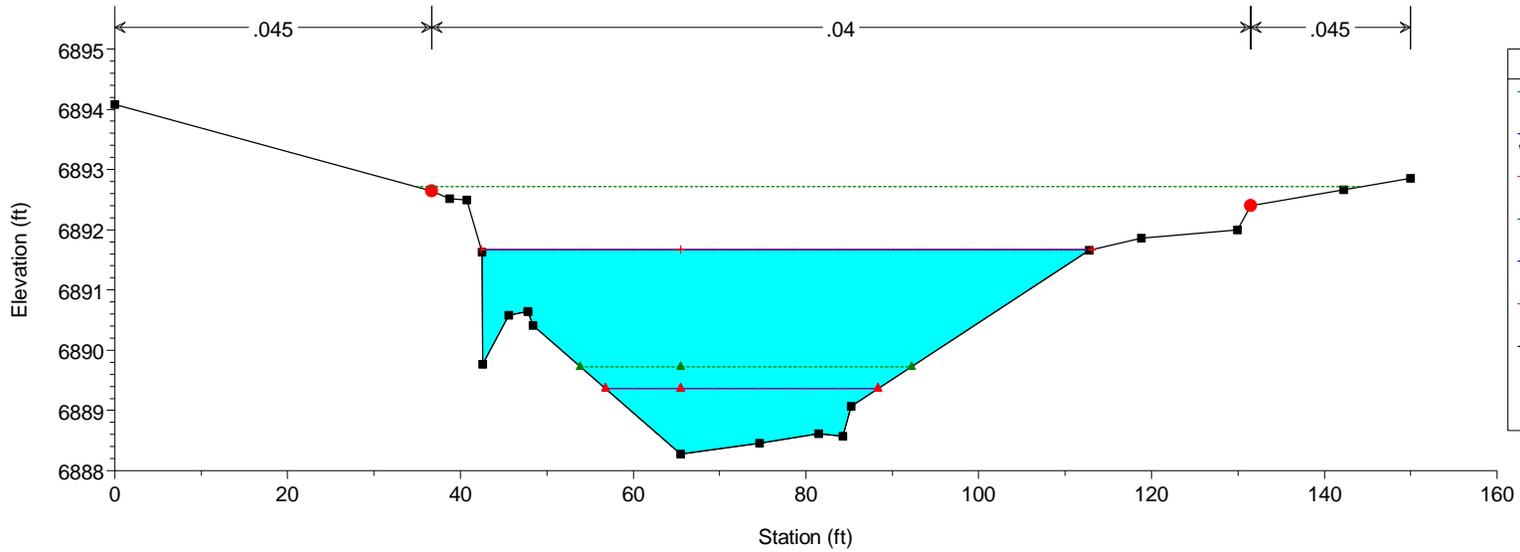


HEC-RAS Model Plan: Phase 1 10/21/2019

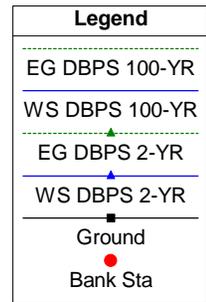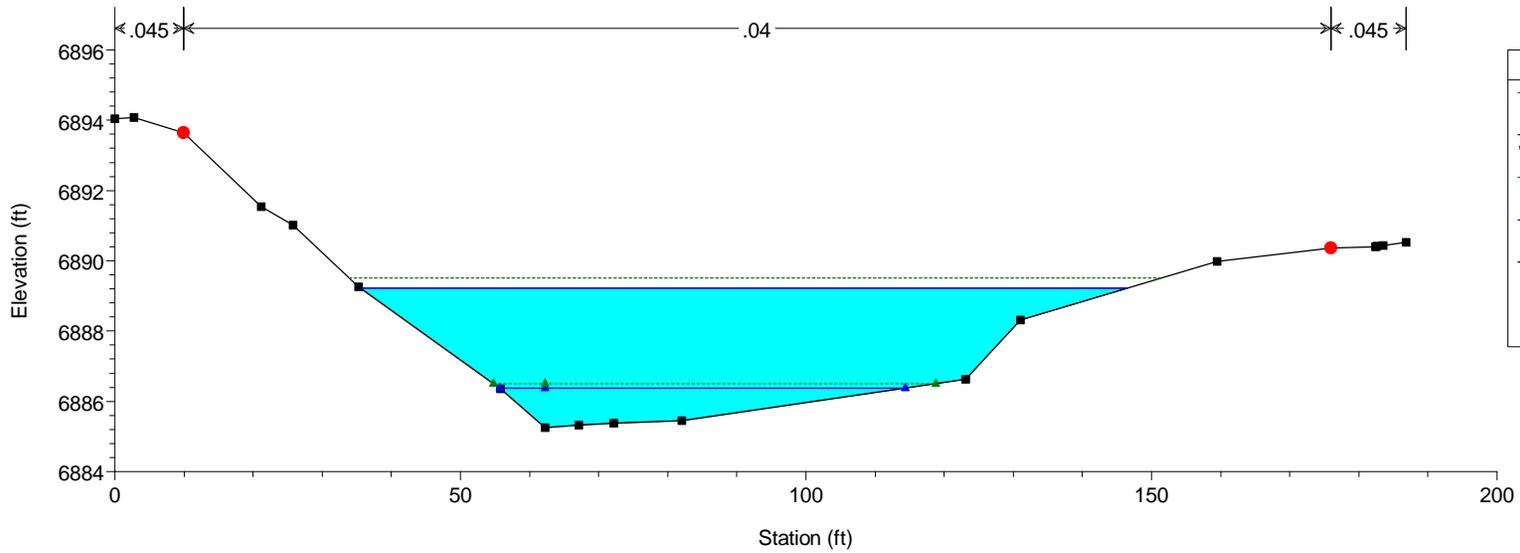


HEC-RAS Model Plan: Phase 1 10/21/2019

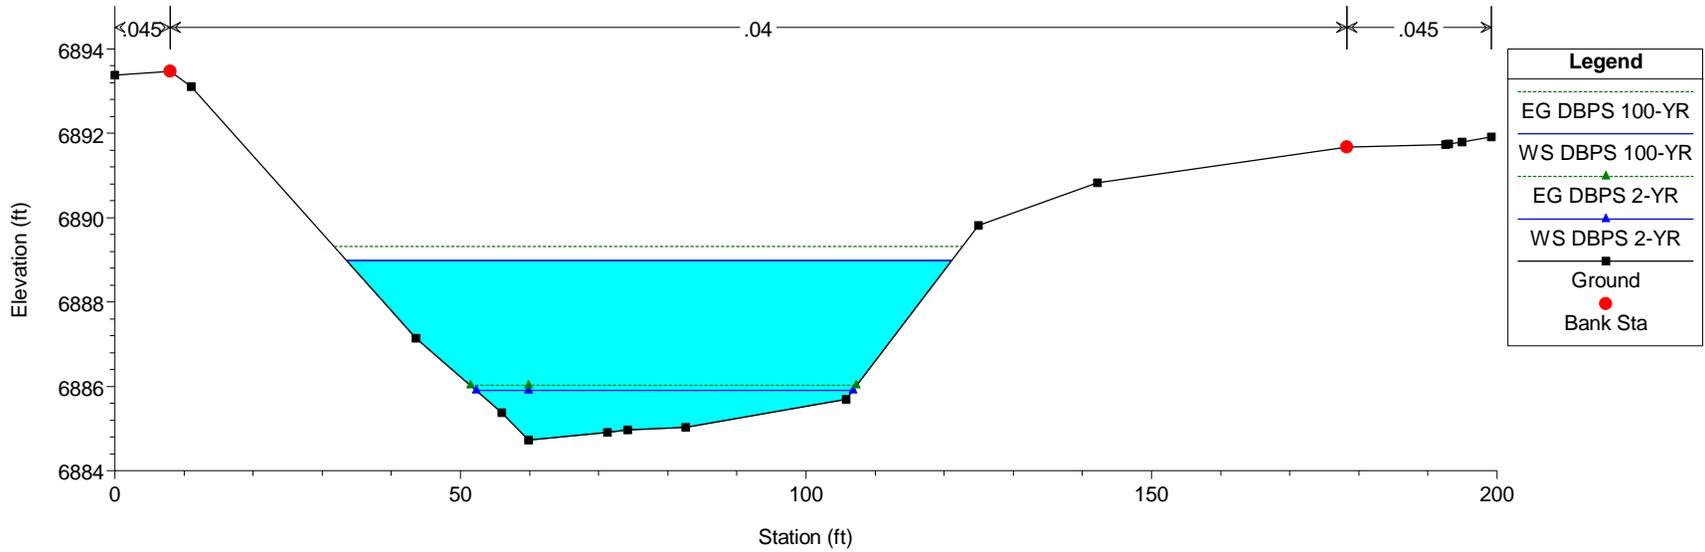

HEC-RAS Model Plan: Phase 1 10/21/2019

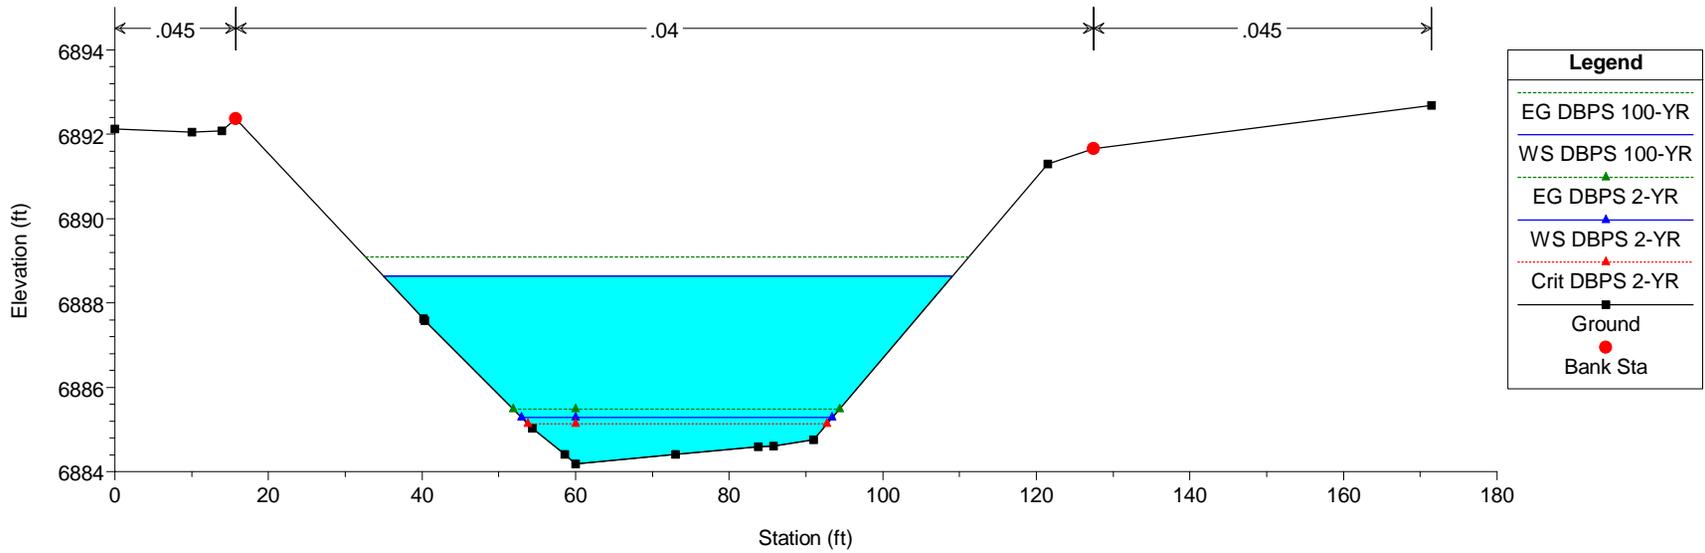

HEC-RAS Model Plan: Phase 1 10/21/2019

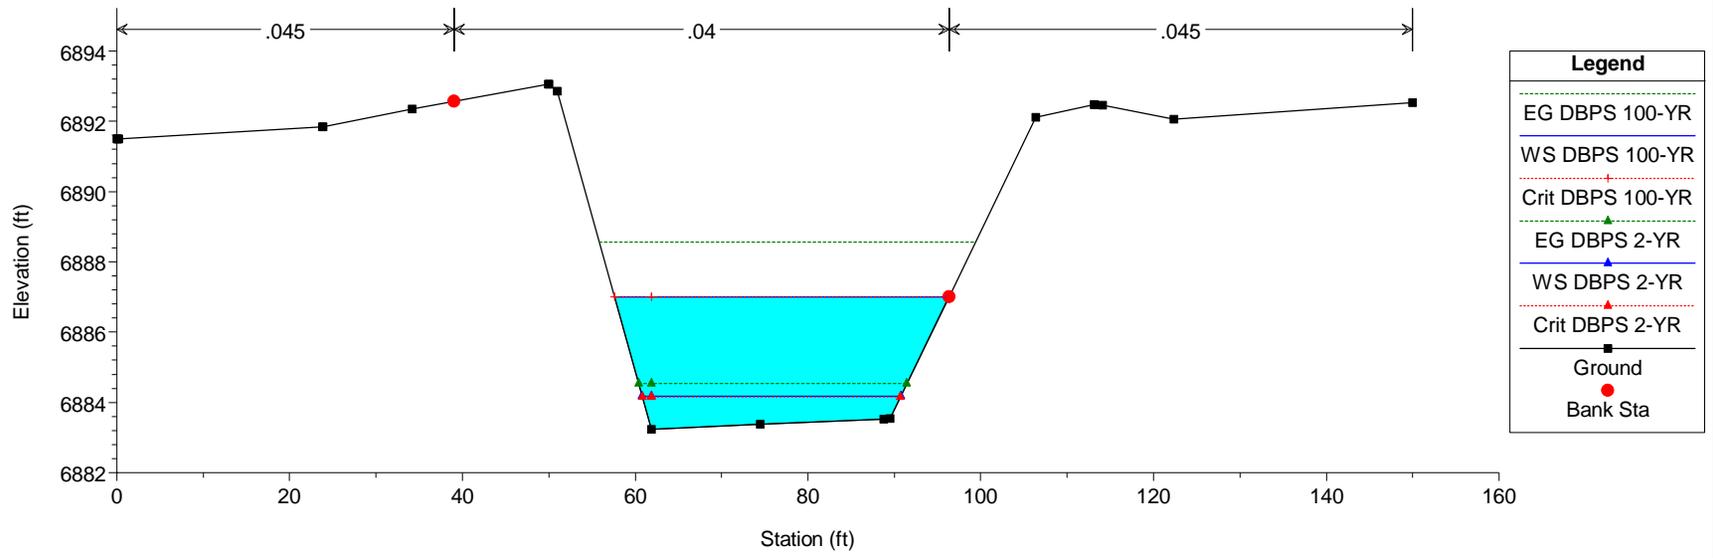


APPENDIX E
On-Site Pond Calculations

Pond (North) Calculations

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

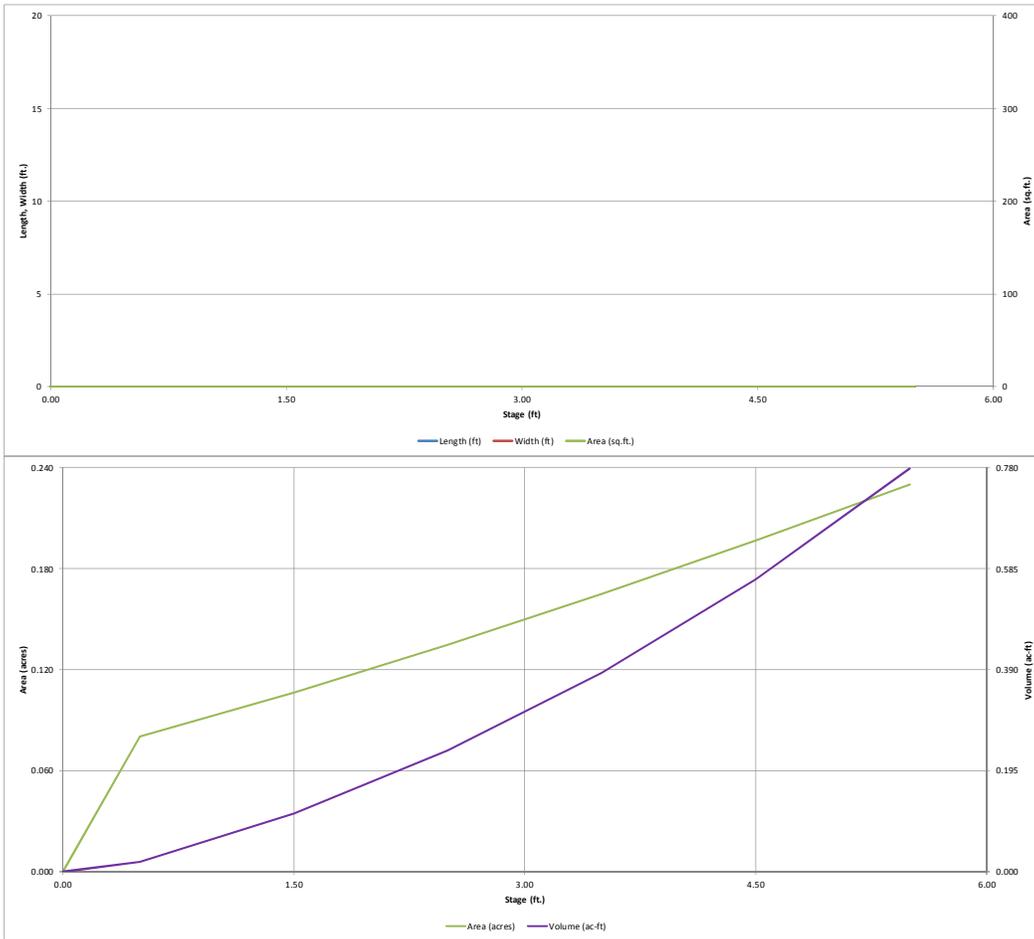


Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: Bent Grass Residential Filing No. 2

Basin ID: Pond (North)

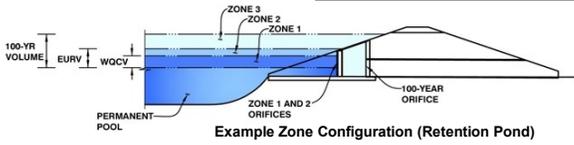

| | Stage (ft) | Zone Volume (ac-ft) | Outlet Type |
|---------------|------------|---------------------|---------------|
| Zone 1 (WQCV) | 3.10 | 0.320 | Orifice Plate |
| Zone 2 | | | |
| Zone 3 | | | |
| | | 0.320 | Total |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth = ft (distance below the filtration media surface)
 Underdrain Orifice Diameter = inches

Calculated Parameters for Underdrain

Underdrain Orifice Area = ft²
 Underdrain Orifice Centroid = feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice = ft (relative to basin bottom at Stage = 0 ft)
 Depth at top of Zone using Orifice Plate = ft (relative to basin bottom at Stage = 0 ft)
 Orifice Plate: Orifice Vertical Spacing = inches
 Orifice Plate: Orifice Area per Row = sq. inches (diameter = 1-7/16 inches)

Calculated Parameters for Plate

WQ Orifice Area per Row = ft²
 Elliptical Half-Width = feet
 Elliptical Slot Centroid = feet
 Elliptical Slot Area = ft²

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

| | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) | 0.00 | 1.00 | 2.00 | | | | | |
| Orifice Area (sq. inches) | 1.66 | 1.66 | 1.66 | | | | | |
| | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
| Stage of Orifice Centroid (ft) | | | | | | | | |
| Orifice Area (sq. inches) | | | | | | | | |

User Input: Vertical Orifice (Circular or Rectangular)

Invert of Vertical Orifice = ft (relative to basin bottom at Stage = 0 ft)
 Depth at top of Zone using Vertical Orifice = ft (relative to basin bottom at Stage = 0 ft)
 Vertical Orifice Diameter = inches

Calculated Parameters for Vertical Orifice

Vertical Orifice Area = ft²
 Vertical Orifice Centroid = feet

User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)

Overflow Weir Front Edge Height, Ho = ft (relative to basin bottom at Stage = 0 ft)
 Overflow Weir Front Edge Length = feet
 Overflow Weir Slope = H:V (enter zero for flat grate)
 Horiz. Length of Weir Sides = feet
 Overflow Grate Open Area % = % grate open area/total area
 Debris Clogging % = %

Calculated Parameters for Overflow Weir

Height of Grate Upper Edge, H₁ = feet
 Over Flow Weir Slope Length = feet
 Grate Open Area / 100-yr Orifice Area = should be ≥ 4
 Overflow Grate Open Area w/o Debris = ft²
 Overflow Grate Open Area w/ Debris = ft²

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

Depth to Invert of Outlet Pipe = ft (distance below basin bottom at Stage = 0 ft)
 Circular Orifice Diameter = inches

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

Outlet Orifice Area = ft²
 Outlet Orifice Centroid = feet
 Half-Central Angle of Restrictor Plate on Pipe = radians

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage = ft (relative to basin bottom at Stage = 0 ft)
 Spillway Crest Length = feet
 Spillway End Slopes = H:V
 Freeboard above Max Water Surface = feet

Calculated Parameters for Spillway




Spillway Design Flow Depth = feet
 Stage at Top of Freeboard = feet
 Basin Area at Top of Freeboard = acres

Routed Hydrograph Results

| | WQCV | EURV | 2 Year | 5 Year | 10 Year | 25 Year | 50 Year | 100 Year | 500 Year |
|---|-------|----------|----------|----------|----------|----------|----------|----------|----------|
| Design Storm Return Period | | | | | | | | | |
| One-Hour Rainfall Depth (in) | 0.53 | 1.07 | 1.19 | 1.50 | 1.75 | 2.00 | 2.25 | 2.52 | 3.68 |
| Calculated Runoff Volume (acre-ft) | 0.320 | 1.043 | 0.711 | 0.936 | 1.154 | 1.445 | 1.817 | 2.259 | 3.846 |
| OPTIONAL Override Runoff Volume (acre-ft) | | | | | | | | | |
| Inflow Hydrograph Volume (acre-ft) | 0.320 | 1.043 | 0.710 | 0.936 | 1.154 | 1.445 | 1.817 | 2.259 | 3.847 |
| Predevelopment Unit Peak Flow, q (cfs/acre) | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.02 | 0.15 | 0.38 | 1.02 |
| Predevelopment Peak Q (cfs) | 0.0 | 0.0 | 0.0 | 0.1 | 0.2 | 0.4 | 3.0 | 7.2 | 19.5 |
| Peak Inflow Q (cfs) | 4.5 | 14.5 | 9.9 | 13.0 | 16.1 | 20.0 | 25.1 | 31.1 | 52.6 |
| Peak Outflow Q (cfs) | 0.2 | 13.2 | 8.3 | 12.2 | 18.5 | 19.2 | 32.9 | 37.0 | 68.4 |
| Ratio Peak Outflow to Predevelopment Q | N/A | N/A | N/A | 159.6 | 104.1 | 48.2 | 11.1 | 5.1 | 3.5 |
| Structure Controlling Flow | Plate | Spillway |
| Max Velocity through Grate 1 (fps) | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Max Velocity through Grate 2 (fps) | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Time to Drain 97% of Inflow Volume (hours) | 38 | 34 | 37 | 35 | 33 | 31 | 28 | 26 | 19 |
| Time to Drain 99% of Inflow Volume (hours) | 40 | 40 | 42 | 41 | 40 | 39 | 38 | 37 | 32 |
| Maximum Ponding Depth (ft) | 2.87 | 3.47 | 3.41 | 3.46 | 3.53 | 3.54 | 3.66 | 3.69 | 3.91 |
| Area at Maximum Ponding Depth (acres) | 0.15 | 0.16 | 0.16 | 0.16 | 0.17 | 0.17 | 0.17 | 0.17 | 0.18 |
| Maximum Volume Stored (acre-ft) | 0.286 | 0.379 | 0.369 | 0.377 | 0.389 | 0.389 | 0.410 | 0.416 | 0.454 |

Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

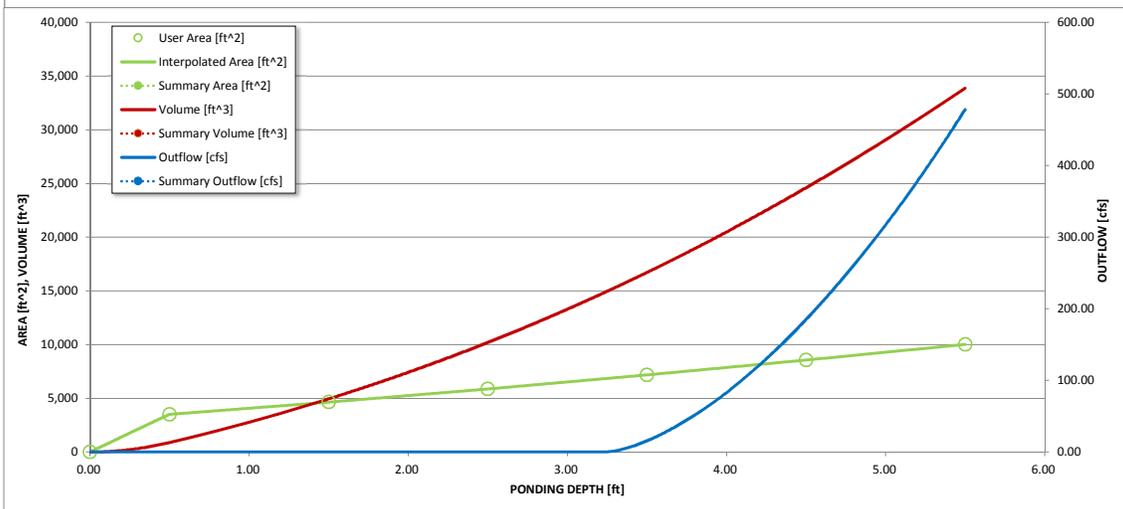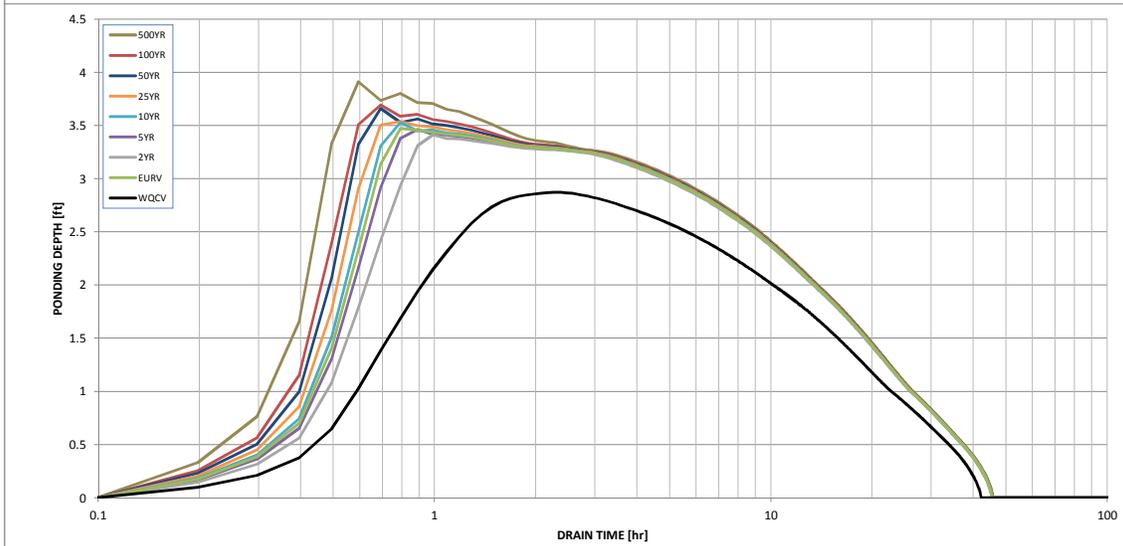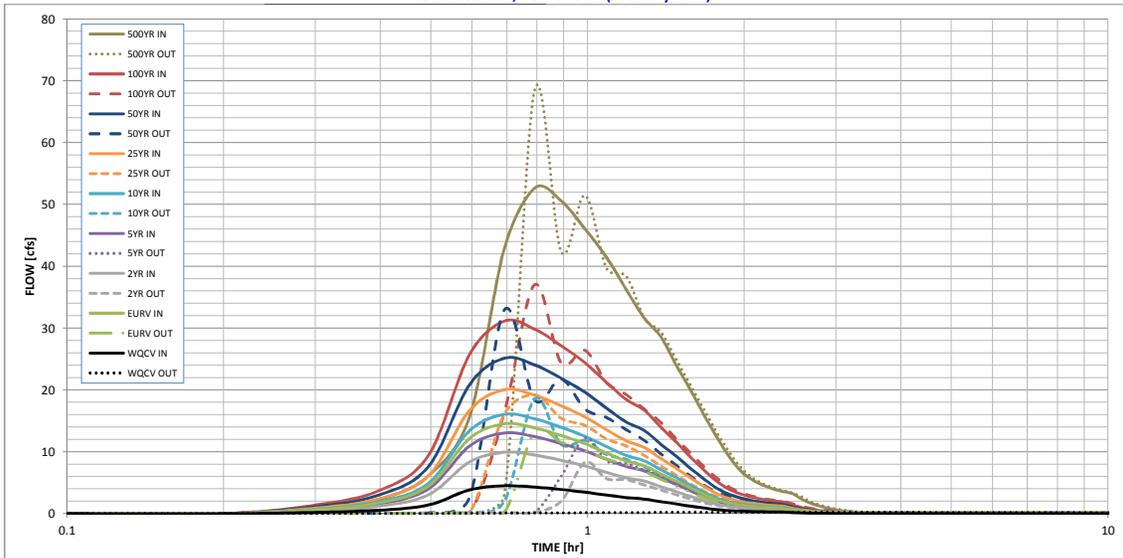

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound | | | |
| maximum bound | | | |

Pond (North) - FOREBAY CALCULATIONS

1) $WQCV \text{ (inches)} = a(.91I^3 - 1.19I^2 + .78I)$

$I = \text{impervious percentage} = 48\%$

$a = \text{Coefficient corresponding to WQCV drain time} = 1 \text{ (40 hours)}$

$WQCV \text{ (inches)} = 0.20 \text{ inches}$

2) $WQCV \text{ (ac-ft)} = (WQCV \text{ (inches)})/12 \times A$

$\text{Area} = \text{tributary area} = 19.12 \text{ acres}$

$WQCV \text{ (ac-ft)} = 0.32$

$WQCV \text{ (cubic feet)} = 13,923$

3) Forebay Volume

Per Table EDB-4, Section T-5 of USDCM Volume 3 - Forebay Volume = 2% of WQCV and be 18" depth since watershed up to 5 impervious acres

Forebay Volume = 2% of WQCV = 278 cubic feet

with pond depth at 1.5', Forebay Area = 185.6 sq-ft (minimum)

4) Forebay Discharge

Per Table EDB-4, Section T-5 of USDCM Volume 3 - Forebay Discharge = 2% of 100-yr Flow into pond

$Q_{100} = 50 \text{ cfs}$

Forebay discharge = 1.00 cfs

Pond (North) - Forebay Slot

Project Description

Solve For Crest Length

Input Data

| | | | |
|------------------------|---|------|--------------------|
| Discharge | | 1.00 | ft ³ /s |
| Headwater Elevation | | 1.25 | ft |
| Crest Elevation | | 0.00 | ft |
| Tailwater Elevation | | 0.00 | ft |
| Weir Coefficient | | 3.00 | US |
| Number Of Contractions | 0 | | |


Results

| | | | |
|------------------------------|--|------|-----------------|
| Crest Length | | 0.24 | ft |
| Headwater Height Above Crest | | 1.25 | ft |
| Tailwater Height Above Crest | | 0.00 | ft |
| Flow Area | | 0.30 | ft ² |
| Velocity | | 3.35 | ft/s |
| Wetted Perimeter | | 2.74 | ft |
| Top Width | | 0.24 | ft |

Pond (South) Calculations

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

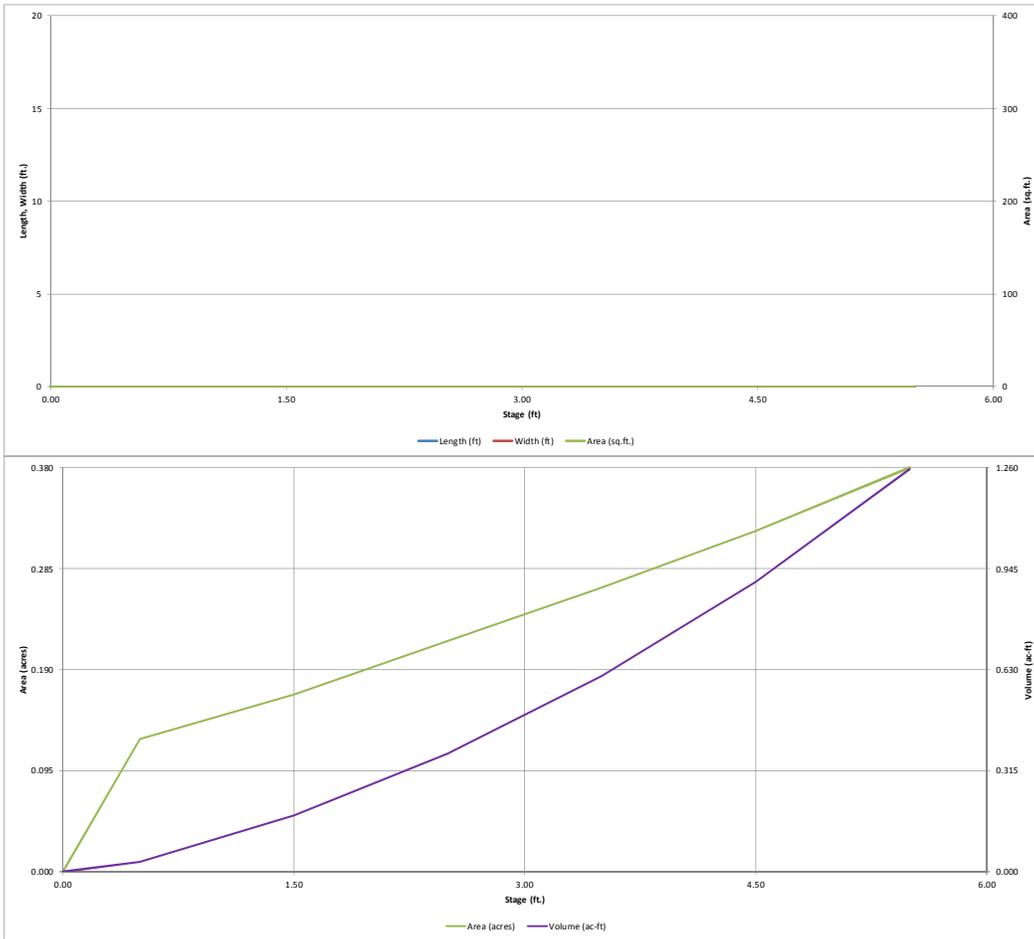


Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: Bent Grass Residential Filing No. 2

Basin ID: Pond (South)

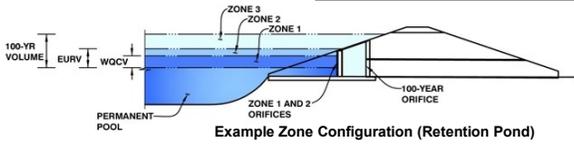

Example Zone Configuration (Retention Pond)

| | Stage (ft) | Zone Volume (ac-ft) | Outlet Type |
|---------------|------------|---------------------|---------------|
| Zone 1 (WQCV) | 3.18 | 0.526 | Orifice Plate |
| Zone 2 | | | Not Utilized |
| Zone 3 | | | Not Utilized |
| | | 0.526 | Total |

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

| | | |
|-----------------------------------|-----|--|
| Underdrain Orifice Invert Depth = | N/A | ft (distance below the filtration media surface) |
| Underdrain Orifice Diameter = | N/A | inches |

Calculated Parameters for Underdrain

| | | |
|-------------------------------|-----|-----------------|
| Underdrain Orifice Area = | N/A | ft ² |
| Underdrain Orifice Centroid = | N/A | feet |

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

| | | |
|--|-------|---|
| Invert of Lowest Orifice = | 0.00 | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Orifice Plate = | 3.20 | ft (relative to basin bottom at Stage = 0 ft) |
| Orifice Plate: Orifice Vertical Spacing = | 12.80 | inches |
| Orifice Plate: Orifice Area per Row = | 2.75 | sq. inches (diameter = 1-7/8 inches) |

Calculated Parameters for Plate

| | | |
|----------------------------|-----------|-----------------|
| WQ Orifice Area per Row = | 1.910E-02 | ft ² |
| Elliptical Half-Width = | N/A | feet |
| Elliptical Slot Centroid = | N/A | feet |
| Elliptical Slot Area = | N/A | ft ² |

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

| | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00 | 1.10 | 2.20 | | | | | |
| Orifice Area (sq. inches) | 2.75 | 2.75 | 2.75 | | | | | |

| | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) | | | | | | | | |
| Orifice Area (sq. inches) | | | | | | | | |

User Input: Vertical Orifice (Circular or Rectangular)

| | Not Selected | Not Selected | |
|---|--------------|--------------|---|
| Invert of Vertical Orifice = | N/A | N/A | ft (relative to basin bottom at Stage = 0 ft) |
| Depth at top of Zone using Vertical Orifice = | N/A | N/A | ft (relative to basin bottom at Stage = 0 ft) |
| Vertical Orifice Diameter = | N/A | N/A | inches |

Calculated Parameters for Vertical Orifice

| | Not Selected | Not Selected | |
|-----------------------------|--------------|--------------|-----------------|
| Vertical Orifice Area = | N/A | N/A | ft ² |
| Vertical Orifice Centroid = | N/A | N/A | feet |

User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)

| | Not Selected | Not Selected | |
|---------------------------------------|--------------|--------------|---|
| Overflow Weir Front Edge Height, Ho = | N/A | N/A | ft (relative to basin bottom at Stage = 0 ft) |
| Overflow Weir Front Edge Length = | N/A | N/A | feet |
| Overflow Weir Slope = | N/A | N/A | H:V (enter zero for flat grate) |
| Horiz. Length of Weir Sides = | N/A | N/A | feet |
| Overflow Grate Open Area % = | N/A | N/A | % grate open area/total area |
| Debris Clogging % = | N/A | N/A | % |

Calculated Parameters for Overflow Weir

| | Not Selected | Not Selected | |
|--|--------------|--------------|-----------------|
| Height of Grate Upper Edge, H ₁ = | N/A | N/A | feet |
| Over Flow Weir Slope Length = | N/A | N/A | feet |
| Grate Open Area / 100-yr Orifice Area = | N/A | N/A | should be ≥ 4 |
| Overflow Grate Open Area w/o Debris = | N/A | N/A | ft ² |
| Overflow Grate Open Area w/ Debris = | N/A | N/A | ft ² |

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

| | Not Selected | Not Selected | |
|----------------------------------|--------------|--------------|--|
| Depth to Invert of Outlet Pipe = | N/A | N/A | ft (distance below basin bottom at Stage = 0 ft) |
| Circular Orifice Diameter = | N/A | N/A | inches |

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

| | Not Selected | Not Selected | |
|--|--------------|--------------|-----------------|
| Outlet Orifice Area = | N/A | N/A | ft ² |
| Outlet Orifice Centroid = | N/A | N/A | feet |
| Half-Central Angle of Restrictor Plate on Pipe = | N/A | N/A | radians |

User Input: Emergency Spillway (Rectangular or Trapezoidal)

| | | |
|-------------------------------------|-------|---|
| Spillway Invert Stage = | 3.25 | ft (relative to basin bottom at Stage = 0 ft) |
| Spillway Crest Length = | 50.00 | feet |
| Spillway End Slopes = | 4.00 | H:V |
| Freeboard above Max Water Surface = | 1.00 | feet |

Calculated Parameters for Spillway




| | | |
|----------------------------------|------|-------|
| Spillway Design Flow Depth = | 0.51 | feet |
| Stage at Top of Freeboard = | 4.76 | feet |
| Basin Area at Top of Freeboard = | 0.34 | acres |

Routed Hydrograph Results

| | WQCV | EURV | 2 Year | 5 Year | 10 Year | 25 Year | 50 Year | 100 Year | 500 Year |
|---|-------|----------|----------|----------|----------|----------|----------|----------|----------|
| Design Storm Return Period = | | | | | | | | | |
| One-Hour Rainfall Depth (in) = | 0.53 | 1.07 | 1.19 | 1.50 | 1.75 | 2.00 | 2.25 | 2.52 | 3.68 |
| Calculated Runoff Volume (acre-ft) = | 0.526 | 1.829 | 1.250 | 1.641 | 2.016 | 2.495 | 3.079 | 3.764 | 6.261 |
| OPTIONAL Override Runoff Volume (acre-ft) = | | | | | | | | | |
| Inflow Hydrograph Volume (acre-ft) = | 0.525 | 1.828 | 1.250 | 1.640 | 2.014 | 2.493 | 3.077 | 3.762 | 6.249 |
| Predevelopment Unit Peak Flow, q (cfs/acre) = | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.02 | 0.18 | 0.43 | 1.15 |
| Predevelopment Peak Q (cfs) = | 0.0 | 0.0 | 0.0 | 0.1 | 0.3 | 0.7 | 5.2 | 12.6 | 33.8 |
| Peak Inflow Q (cfs) = | 8.1 | 27.9 | 19.1 | 25.0 | 30.7 | 37.8 | 46.6 | 56.8 | 93.2 |
| Peak Outflow Q (cfs) = | 0.4 | 29.2 | 14.4 | 21.2 | 32.2 | 34.7 | 56.2 | 64.9 | 110.4 |
| Ratio Peak Outflow to Predevelopment Q = | N/A | N/A | N/A | 157.1 | 102.8 | 49.5 | 10.8 | 5.1 | 3.3 |
| Structure Controlling Flow = | Plate | Spillway |
| Max Velocity through Grate 1 (fps) = | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Max Velocity through Grate 2 (fps) = | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Time to Drain 97% of Inflow Volume (hours) = | 38 | 33 | 36 | 34 | 32 | 30 | 28 | 25 | 19 |
| Time to Drain 99% of Inflow Volume (hours) = | 40 | 40 | 41 | 40 | 39 | 38 | 37 | 36 | 32 |
| Maximum Ponding Depth (ft) = | 2.96 | 3.58 | 3.45 | 3.51 | 3.60 | 3.62 | 3.76 | 3.81 | 4.04 |
| Area at Maximum Ponding Depth (acres) = | 0.24 | 0.27 | 0.26 | 0.27 | 0.27 | 0.27 | 0.28 | 0.28 | 0.30 |
| Maximum Volume Stored (acre-ft) = | 0.474 | 0.629 | 0.597 | 0.613 | 0.637 | 0.640 | 0.679 | 0.693 | 0.760 |

Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

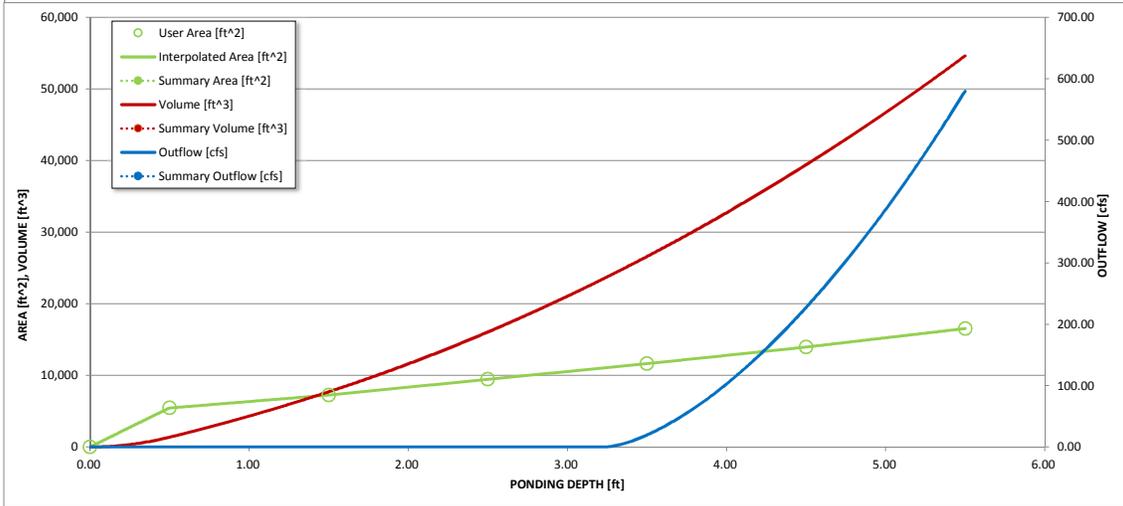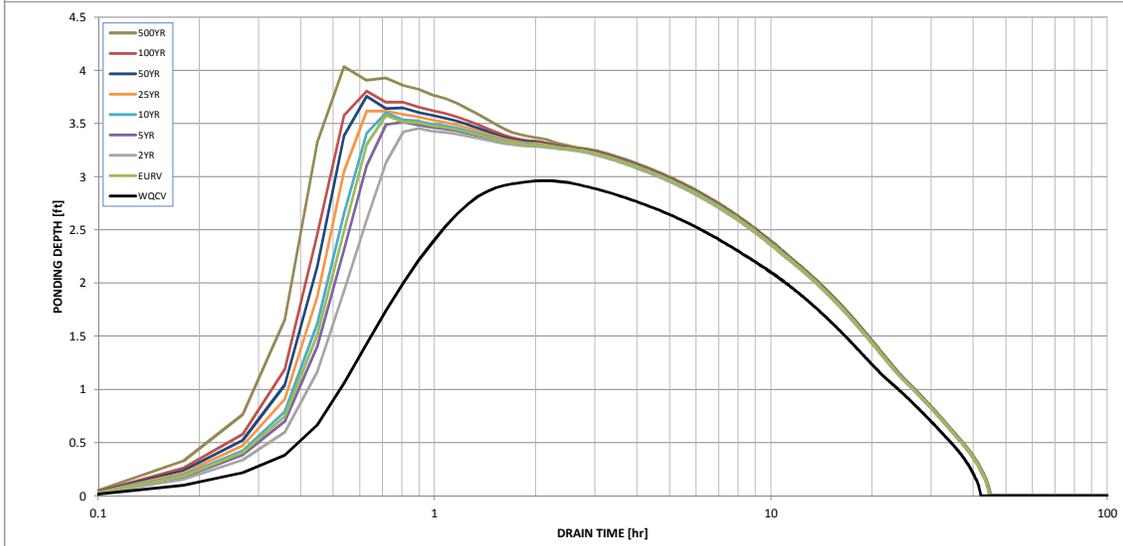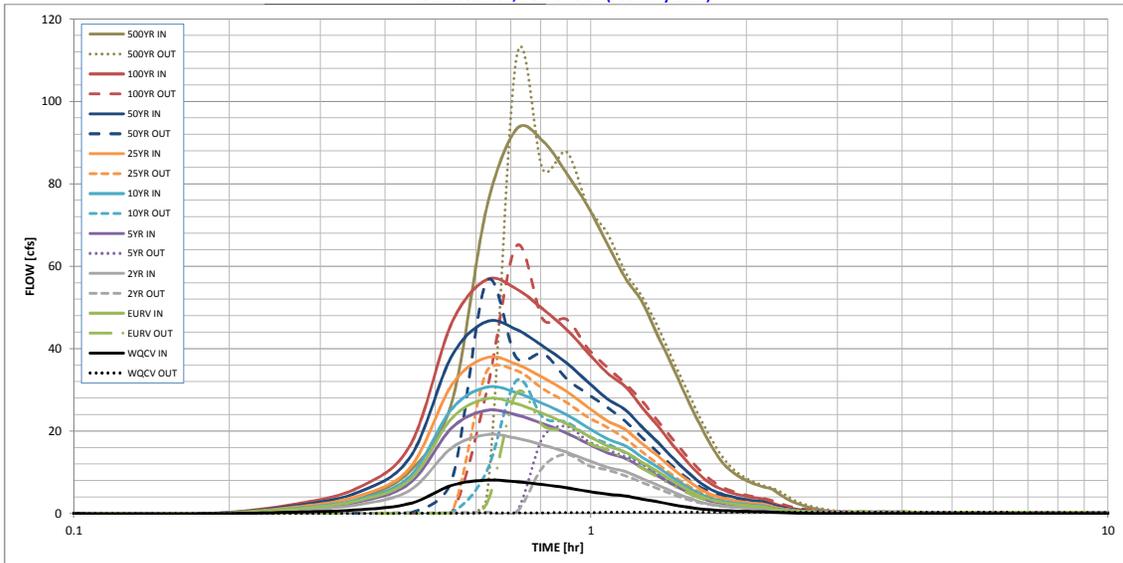

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound | | | |
| maximum bound | | | |

Pond (South) - FOREBAY CALCULATIONS

1) $WQCV \text{ (inches)} = a(.91I^3 - 1.19I^2 + .78I)$

I = impervious percentage = 53%

a = Coefficient corresponding to WQCV drain time = 1 (40 hours)

WQCV (inches) = 0.22 inches

2) $WQCV \text{ (ac-ft)} = (WQCV \text{ (inches)})/12 \times A$

Area = tributary area = 29.31 acres

WQCV (ac-ft) = 0.53

WQCV (cubic feet) = 22,894

3) Forebay Volume

Per Table EDB-4, Section T-5 of USDCM Volume 3 - Forebay Volume = 2% of WQCV and be 18" depth since watershed up to 5 impervious acres

Forebay Volume = 2% of WQCV = 458 cubic feet

with pond depth at 1.5', Forebay Area = 305.3 sq-ft (minimum)

4) Forebay Discharge

Per Table EDB-4, Section T-5 of USDCM Volume 3 - Forebay Discharge = 2% of 100-yr Flow into pond

Q100 = 85 cfs

Forebay discharge = 1.70 cfs

Pond (South) - Forebay Slot

Project Description

Solve For Crest Length

Input Data

| | | |
|------------------------|------|--------------------|
| Discharge | 1.70 | ft ³ /s |
| Headwater Elevation | 1.25 | ft |
| Crest Elevation | 0.00 | ft |
| Tailwater Elevation | 0.00 | ft |
| Weir Coefficient | 3.00 | US |
| Number Of Contractions | 0 | |

Results

| | | |
|------------------------------|------|-----------------|
| Crest Length | 0.41 | ft |
| Headwater Height Above Crest | 1.25 | ft |
| Tailwater Height Above Crest | 0.00 | ft |
| Flow Area | 0.51 | ft ² |
| Velocity | 3.35 | ft/s |
| Wetted Perimeter | 2.91 | ft |
| Top Width | 0.41 | ft |

Pond (South) - Overflow

Project Description

Friction Method Manning Formula
Solve For Normal Depth

Input Data

| | | |
|-----------------------|---------|--------------------|
| Roughness Coefficient | 0.030 | |
| Channel Slope | 0.01000 | ft/ft |
| Left Side Slope | 4.00 | ft/ft (H:V) |
| Right Side Slope | 4.00 | ft/ft (H:V) |
| Bottom Width | 5.00 | ft |
| Discharge | 75.00 | ft ³ /s |

Results

| | | |
|------------------|-------------|-----------------|
| Normal Depth | 1.46 | ft |
| Flow Area | 15.89 | ft ² |
| Wetted Perimeter | 17.07 | ft |
| Hydraulic Radius | 0.93 | ft |
| Top Width | 16.71 | ft |
| Critical Depth | 1.35 | ft |
| Critical Slope | 0.01403 | ft/ft |
| Velocity | 4.72 | ft/s |
| Velocity Head | 0.35 | ft |
| Specific Energy | 1.81 | ft |
| Froude Number | 0.85 | |
| Flow Type | Subcritical | |

GVF Input Data

| | | |
|------------------|------|----|
| Downstream Depth | 0.00 | ft |
| Length | 0.00 | ft |
| Number Of Steps | 0 | |

GVF Output Data

| | | |
|---------------------|----------|-------|
| Upstream Depth | 0.00 | ft |
| Profile Description | | |
| Profile Headloss | 0.00 | ft |
| Downstream Velocity | Infinity | ft/s |
| Upstream Velocity | Infinity | ft/s |
| Normal Depth | 1.46 | ft |
| Critical Depth | 1.35 | ft |
| Channel Slope | 0.01000 | ft/ft |
| Critical Slope | 0.01403 | ft/ft |

APPENDIX F
Regional Pond Calculations

Tributary to Detention Pond WU

See Figures 3-2 & 3-7 of the Falcon Drainage Basin Planning Study (September 2015)

| Basin | Area (sq miles) | Percent Impervious |
|-------|-----------------|--------------------|
| WT10 | 0.14 | 2% |
| WT20 | 0.07 | 2% |
| WT30 | 0.08 | 4% |
| WT40 | 0.19 | 3% |
| WT50 | 0.19 | 2% |
| WT60 | 0.20 | 2% |
| WT70 | 0.17 | 1% |
| WT80 | 0.07 | 2% |
| WT90 | 0.15 | 1% |
| WT100 | 0.19 | 1% |
| WT110 | 0.19 | 2% |
| WT120 | 0.05 | 3% |
| WT130 | 0.10 | 29% |
| WT140 | 0.13 | 2% |
| WT150 | 0.23 | 10% |
| WT160 | 0.11 | 20% |
| WT170 | 0.12 | 3% |
| WT180 | 0.10 | 0% |
| WT190 | 0.06 | 8% |
| WT200 | 0.30 | 4% |
| WT210 | 0.27 | 12% |
| WT220 | 0.19 | 13% |
| WT230 | 0.20 | 27% |
| WT240 | 0.08 | 27% |
| Total | 3.58 | 7.33% |

Water Quality Capture Volume, WQCV:
 $WQCV = a(0.91I^3 - 1.19I^2 + 0.78I)$ (Equation 3-1)

Where:
 a = Coefficient corresponding to WQCV drain time
 I = Imperviousness (%/100)

Drain Time = 40 hrs
 WQCV = 0.051 Inches

BMP Storage Volume, V:
 $V = (WQCV/12)A$ (Equation 3-3)


Where:
 A = Tributary area (acres)

V = 9.764 acre-ft

*Reference Section 3.0 of UDFCD Volume 3, August 2011

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

UD-Detention, Version 3.07 (February 2017)

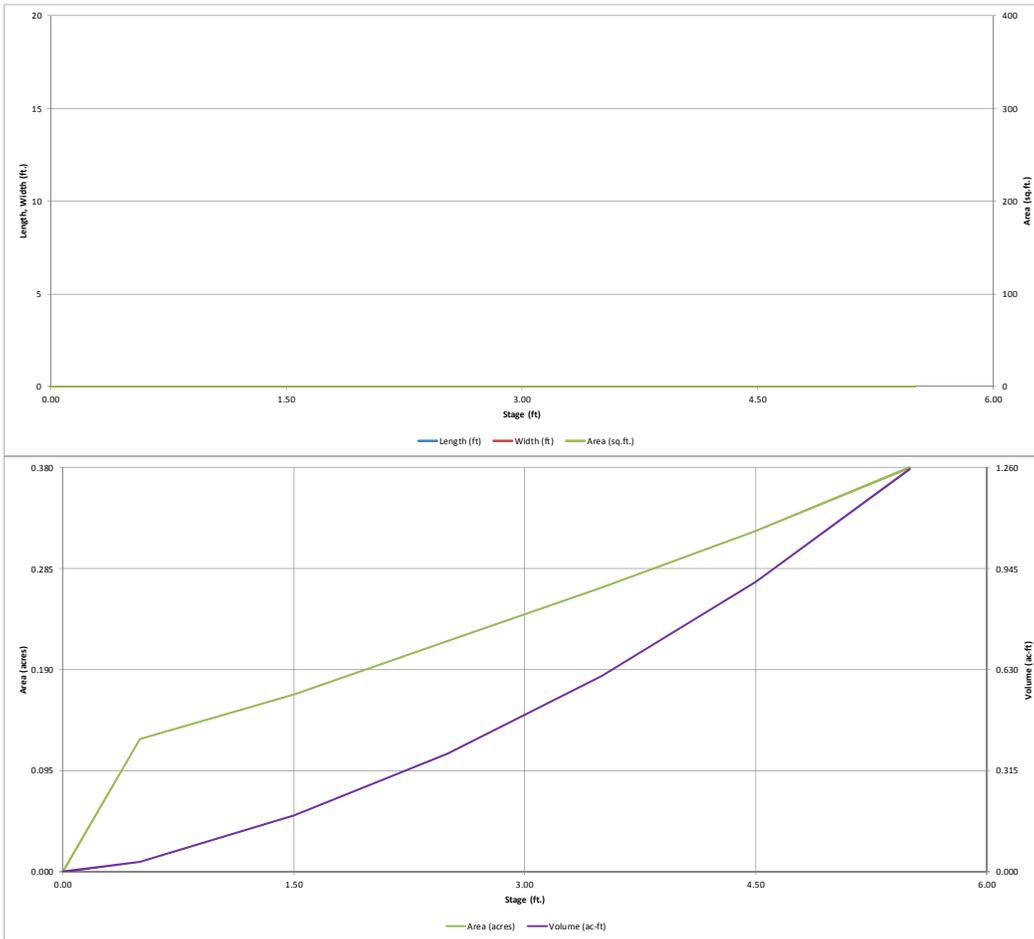


Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

Project: Thompson Thrift

Basin ID: Detention and Water Quality Pond

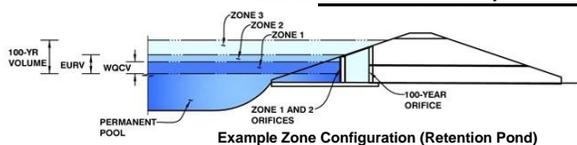

Example Zone Configuration (Retention Pond)

| | Stage (ft) | Zone Volume (ac-ft) | Outlet Type |
|---------------|------------|---------------------|---------------|
| Zone 1 (WOCV) | 5.64 | 9.764 | Orifice Plate |
| Zone 2 | | | |
| Zone 3 | | | |
| | | 9.764 | Total |

User Input: Orifice at Underdrain Outlet (typically used to drain WOCV in a Filtration BMP)

Underdrain Orifice Invert Depth = ft (distance below the filtration media surface)
 Underdrain Orifice Diameter = inches

Calculated Parameters for Underdrain

Underdrain Orifice Area = ft²
 Underdrain Orifice Centroid = feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WOCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice = ft (relative to basin bottom at Stage = 0 ft)
 Depth at top of Zone using Orifice Plate = ft (relative to basin bottom at Stage = 0 ft)
 Orifice Plate: Orifice Vertical Spacing = inches
 Orifice Plate: Orifice Area per Row = sq. inches (use rectangular openings)

Calculated Parameters for Plate

WQ Orifice Area per Row = ft²
 Elliptical Half-Width = feet
 Elliptical Slot Centroid = feet
 Elliptical Slot Area = ft²

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

| | Row 1 (required) | Row 2 (optional) | Row 3 (optional) | Row 4 (optional) | Row 5 (optional) | Row 6 (optional) | Row 7 (optional) | Row 8 (optional) |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Stage of Orifice Centroid (ft) | 0.00 | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | | |
| Orifice Area (sq. inches) | 15.87 | 15.87 | 15.87 | 15.87 | 15.87 | 15.87 | | |

| | Row 9 (optional) | Row 10 (optional) | Row 11 (optional) | Row 12 (optional) | Row 13 (optional) | Row 14 (optional) | Row 15 (optional) | Row 16 (optional) |
|--------------------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Stage of Orifice Centroid (ft) | | | | | | | | |
| Orifice Area (sq. inches) | | | | | | | | |

User Input: Vertical Orifice (Circular or Rectangular)

Invert of Vertical Orifice = ft (relative to basin bottom at Stage = 0 ft)
 Depth at top of Zone using Vertical Orifice = ft (relative to basin bottom at Stage = 0 ft)
 Vertical Orifice Diameter = inches

Calculated Parameters for Vertical Orifice

Vertical Orifice Area = ft²
 Vertical Orifice Centroid = feet

User Input: Overflow Weir (Dropbox) and Grate (Flat or Sloped)

Overflow Weir Front Edge Height, H_o = ft (relative to basin bottom at Stage = 0 ft)
 Overflow Weir Front Edge Length = feet
 Overflow Weir Slope = H:V (enter zero for flat grate)
 Horiz. Length of Weir Sides = feet
 Overflow Grate Open Area % = % grate open area/total area
 Debris Clogging % = %

Calculated Parameters for Overflow Weir

Height of Grate Upper Edge, H₁ = feet
 Over Flow Weir Slope Length = feet
 Grate Open Area / 100-yr Orifice Area = should be ≥ 4
 Overflow Grate Open Area w/o Debris = ft²
 Overflow Grate Open Area w/ Debris = ft²

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

Depth to Invert of Outlet Pipe = ft (distance below basin bottom at Stage = 0 ft)
 Circular Orifice Diameter = inches

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

Outlet Orifice Area = ft²
 Outlet Orifice Centroid = feet
 Half-Central Angle of Restrictor Plate on Pipe = radians

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage = ft (relative to basin bottom at Stage = 0 ft)
 Spillway Crest Length = feet
 Spillway End Slopes = H:V
 Freeboard above Max Water Surface = feet

Calculated Parameters for Spillway




Spillway Design Flow Depth = feet
 Stage at Top of Freeboard = feet
 Basin Area at Top of Freeboard = acres

Routed Hydrograph Results

| | WOCV | EURV | 2 Year | 5 Year | 10 Year | 25 Year | 50 Year | 100 Year | 500 Year |
|---|-------|--------|--------|--------|---------|---------|---------|----------|----------|
| Design Storm Return Period | | | | | | | | | |
| One-Hour Rainfall Depth (in) | 0.53 | 1.07 | 0.84 | 1.12 | 1.36 | 1.72 | 2.01 | 2.31 | 3.07 |
| Calculated Runoff Volume (acre-ft) | 9.764 | 11.312 | 5.157 | 7.503 | 10.464 | 17.753 | 37.566 | 82.799 | 201.813 |
| OPTIONAL Override Runoff Volume (acre-ft) | | | | | | | | | |
| Inflow Hydrograph Volume (acre-ft) | 9.756 | 11.304 | 5.148 | 7.496 | 10.451 | 17.740 | 37.540 | 82.749 | 201.703 |
| Predevelopment Unit Peak Flow, q (cfs/acre) | 0.00 | 0.00 | 0.00 | 0.00 | 0.01 | 0.01 | 0.11 | 0.27 | 0.68 |
| Predevelopment Peak Q (cfs) | 0.0 | 0.0 | 0.7 | 5.4 | 13.0 | 32.3 | 249.1 | 626.2 | 1569.1 |
| Peak Inflow Q (cfs) | 101.5 | 117.0 | 54.5 | 78.6 | 108.5 | 181.6 | 364.4 | 736.9 | 1639.4 |
| Peak Outflow Q (cfs) | 5.1 | 5.5 | 3.6 | 4.3 | 5.3 | 6.7 | 9.2 | 13.7 | 25.5 |
| Ratio Peak Outflow to Predevelopment Q | N/A | N/A | N/A | 0.8 | 0.4 | 0.2 | 0.0 | 0.0 | 0.0 |
| Structure Controlling Flow | Plate | Plate | Plate | Plate | Plate | Plate | Plate | N/A | N/A |
| Max Velocity through Grate 1 (fps) | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Max Velocity through Grate 2 (fps) | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Time to Drain 97% of Inflow Volume (hours) | 37 | 40 | 27 | 32 | 38 | 50 | 75 | 115 | 177 |
| Time to Drain 99% of Inflow Volume (hours) | 40 | 43 | 29 | 35 | 41 | 54 | 81 | 124 | >120 |
| Maximum Ponding Depth (ft) | 5.37 | 5.72 | 4.14 | 4.81 | 5.53 | 7.10 | 11.01 | 19.41 | 41.50 |
| Area at Maximum Ponding Depth (acres) | 3.98 | 4.25 | 2.95 | 3.53 | 4.10 | 4.59 | 5.14 | 5.57 | 5.57 |
| Maximum Volume Stored (acre-ft) | 8.703 | 10.143 | 4.429 | 6.602 | 9.349 | 16.262 | 35.297 | 50.761 | 50.761 |

Detention Basin Outlet Structure Design

UD-Detention, Version 3.07 (February 2017)

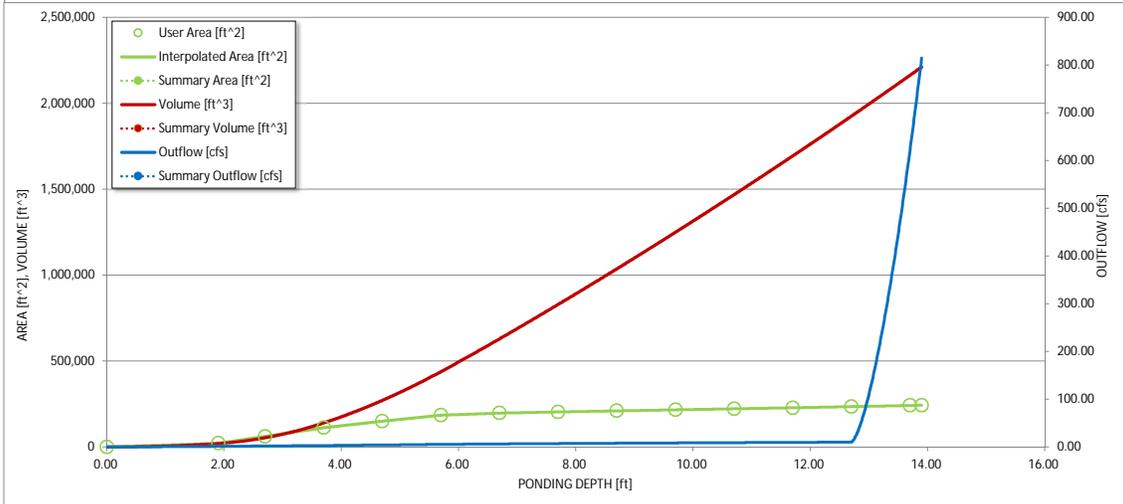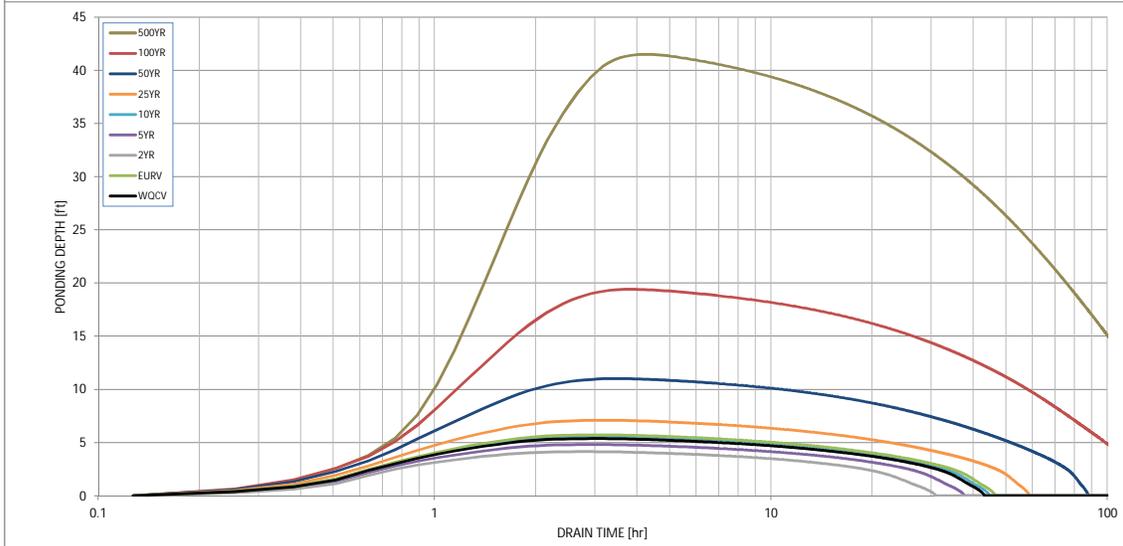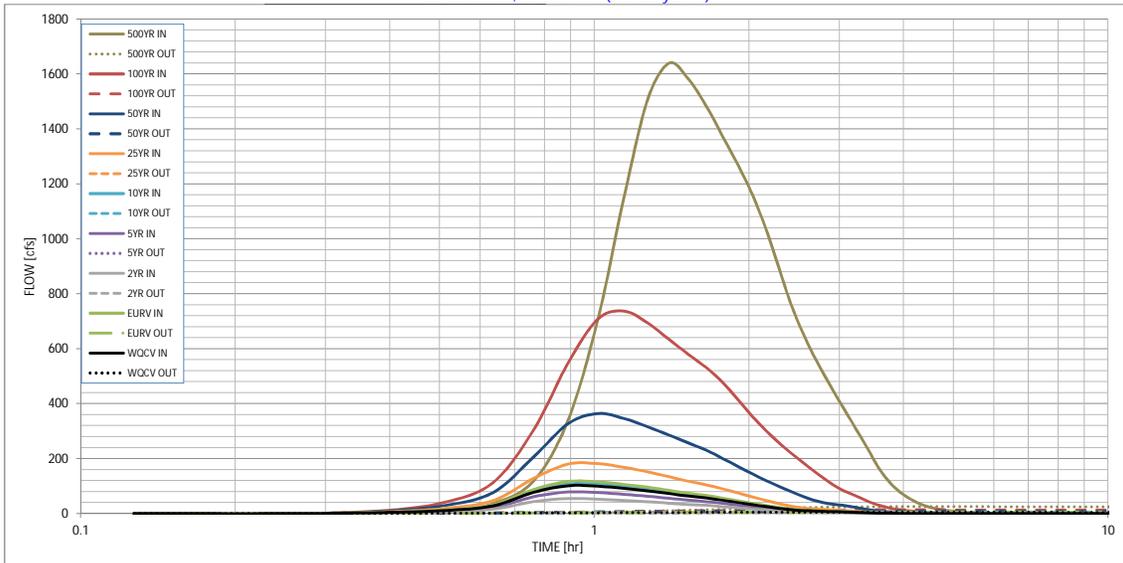

| S-A-V-D Chart Axis Override | X-axis | Left Y-Axis | Right Y-Axis |
|-----------------------------|--------|-------------|--------------|
| minimum bound | | | |
| maximum bound | | | |

Rock Chute Design - Plan Sheet

(Version 4.02 - 11/04/09, Based on Design of Rock Chutes by Robinson, Rice, Kadavy, ASAE, 1998)

Project: Pond WU - Riprap Weir
Designer: Aaron Johnston
Date: 5/20/2019

County: 0.00
Checked by: _____
Date: _____

| Design Values | Rock Gradation Envelope | Quantities ^a |
|---|--|---|
| Angular D ₅₀ dia. = 19.1 in. | % Passing Diameter, in. (weight, lbs.) | Angular Rock = 1183 yd ³ |
| Rock _{chute} thickness = 38.3 in. | D ₁₀₀ ----- 29 - 38 (1714 - 4062) | Geotextile (8 oz.) ^b = 1261 yd ² |
| Inlet apron length = 19 ft. | D ₈₅ ----- 25 - 34 (1116 - 2961) | Bedding (6 in.) = 215 yd ³ |
| Outlet apron length = 24 ft. | D ₅₀ ----- 19 - 29 (508 - 1714) | Excavation = 0 yd ³ |
| Radius = 53 ft. | D ₁₀ ----- 15 - 25 (260 - 1116) | Earthfill = 0 yd ³ |
| Will bedding be used? Yes ----- Depth (in.) = 6.0 | | Seeding = 0.0 acres |

Notes: ^a Rock, bedding, and geotextile quantities are determined from the x-section below (neglect radius).
^b Geotextile shall be overlapped (18-in. min.) and anchored (18-in. min. along sides and 24-in. min. on the ends).

Stakeout Notes

| Sta. | Elev. (Pnt) |
|--------|----------------|
| 0+00 | 6834 ft. (1) |
| 0+11.2 | 6834 ft. (2) |
| 0+19 | 6833.4 ft. (3) |
| 0+26.5 | 6831.8 ft. (4) |
| 0+56 | 6823 ft. (5) |
| 0+80 | 6823 ft. (6) |
| 0+80 | 6823 ft. (7) |

Rock Chute Cost Estimate

| Unit | Unit Cost | Cost |
|--------------|--------------------------|--------------------|
| Rock | \$30.00 /yd ³ | \$35,490.00 |
| Geotextile | \$2.00 /yd ² | \$2,522.00 |
| Bedding | \$12.00 /yd ³ | \$2,580.00 |
| Excavation | \$1.25 /yd ³ | \$0.00 |
| Earthfill | \$2.50 /yd ³ | \$0.00 |
| Seeding | \$300.00 /ac. | \$0.00 |
| Total | | \$40,592.00 |

Profile Along Centerline of Rock Chute **** Note: The outlet will not function adequately**

Inlet Channel Cross Section

Rock Chute Cross Section * Use H_p throughout chute but not less than Z₂.

Outlet Channel Cross Section

Profile, Cross Sections, and Quantities

| | |
|--|-----------------------------|
| Project: Pond WU - Riprap Weir | |
| Location: County | |
| U.S. Department of Agriculture Natural Resources Conservation Service | |
| Designed: <u>Aaron Johnston</u> | Approved by: _____ |
| Drawn: <u>NRCS Standard Dwg.</u> | Title: _____ |
| Traced: _____ | Sheet No. _____ of _____ |
| Checked: _____ | |

Weir Report

5-yr Weir

Trapezoidal Weir


Crest = Sharp
Bottom Length (ft) = 54.00
Total Depth (ft) = 1.63
Side Slope (z:1) = 4.00

Highlighted

Depth (ft) = 0.55
Q (cfs) = 70.00
Area (sqft) = 30.91
Velocity (ft/s) = 2.26
Top Width (ft) = 58.40

Calculations

Weir Coeff. Cw = 3.10
Compute by: Known Q
Known Q (cfs) = 70.00

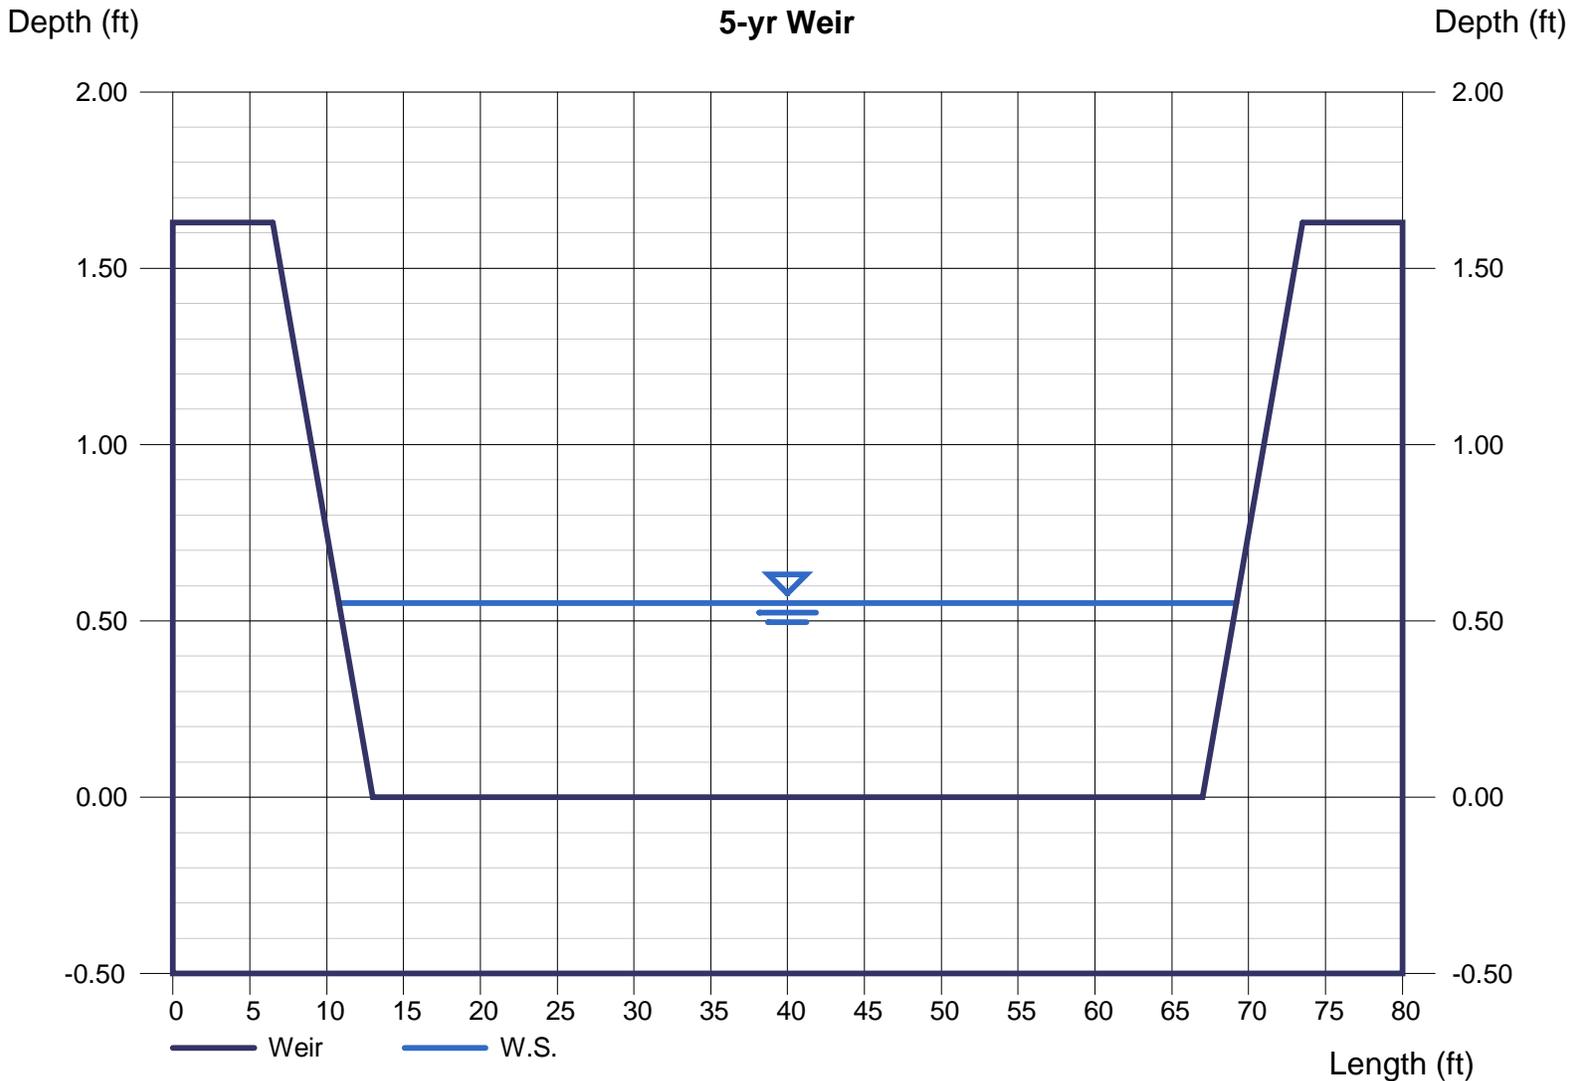

APPENDIX G
Drainage Map

