



Preliminary Drainage Report

# Overlook at Homestead Subdivision El Paso County, Colorado

Prepared for:

PT Overlook LLC 1864 Woodmoor Drive, Suite 100 Monument, CO 80132

Prepared by:

Kimley-Horn and Associates, Inc. 2 North Nevada Avenue, Suite 900 Colorado Springs, Colorado 80903 (719) 453-0180

Contact: Kevin Kofford, P.E.

Project #: 196239003

PCD Filing No.: SP238

Prepared: August 7, 2023





## **CERTIFICATION**

## **DESIGN ENGINEER'S STATEMENT**

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparation of this report.

SIGNATURE (Affix Seal):		
Kevin Kofford, P.E	<b>.</b>	Date
OWNER/DEVELOPER'S STATEMENT I, the developer, have read and will comply with the developer.		specified in this Drainage
Report and Plan.		
PT Overlook LLC		
Authorized Signature	Date	
Joseph W. DesJardin		
Director of Entitlements		
Address: 1864 Woodmoor Drive Monument, CO 80132		
EL PASO COUNTY		
Filed in accordance with the requirements of Paso County Engineering Criteria Manual ar		
Josh Palmer, P.E.	Date	
County Engineer/ ECM Administrator	Dato	
Conditions:		

Kimley » Horn

## **TABLE OF CONTENTS**

CERTIFICATION	
DESIGN ENGINEER'S STATEMENTOWNER/DEVELOPER'S STATEMENTEL PASO COUNTY	1
TABLE OF CONTENTS	
INTRODUCTION	3
PURPOSE AND SCOPE OF STUDY	3
LOCATION DESCRIPTION OF PROPERTY	3 ?
FLOODPLAIN STATEMENT	
DRAINAGE BASINS	4
MAJOR BASIN DESCRIPTIONS	
COMPLIANCE WITH PREVIOUIS FINAL DRAINAGE REPORT EXISTING SUB-BASIN DESCRIPTIONS	
PROPOSED SUB-BASIN DESCRIPTIONS	
DRAINAGE DESIGN CRITERIA	11
DEVELOPMENT CRITERIA REFERENCE	11
HYDROLOGIC CRITERIA	
HYDRAULIC CRITERIA	
CULVERT SIZING	12
CHANNEL STABILIZATION	
THE FOUR STEP PROCESS	12
DRAINAGE FEES	13
FEES	13
SUMMARY	13
REFERENCES	14
APPENDIX	
APPENDIX APPENDIX A: VICINITY MAP	
APPENDIX B: FEMA MAP & SOILS REPORT	
APPENDIX C: HYDROLOGY	
APPENDIX D: HYDRUALICS APPENDIX E: EL PASO COUNTY DRAINAGE BASIN MAP	



APPENDIX F: APEX RANCH DRAINAGE REPORT

APPENDIX G: DRAINAGE MAPS

## INTRODUCTION

## PURPOSE AND SCOPE OF STUDY

The purpose of this Preliminary Drainage Report (PDR) is to provide the hydrologic and preliminary hydraulic calculations and to document the drainage design methodology in support of the proposed Overlook at Homestead Subdivision ("the Project") for PT Overlook LLC. The finalized hydraulic design and associated calculations will be provided with the Final Drainage Report. The Project is located within the jurisdictional limits of El Paso County ("the County"). Therefore, the hydrologic and hydraulic design is based on the County's criteria which is described in further detail within the report.

## LOCATION

The Project Site located east of Elbert Road within El Paso County, Colorado including parcels 4122000005, 4100000255, 4100000256. More specifically, the site is a Portion of Section 22 and a Portion of Section 27, Township 11 South, Range 64 West of the 6<sup>th</sup> PM, County of El Paso, State of Colorado. North of the project site is agricultural and rural residential land, to the east is Homestead Ranch Park owned and maintained by El Paso County, and to the south and west is Homestead Ranch subdivisions. A vicinity map has been provided in the **Appendix** of this report.

The Site is currently owned by PT Overlook LLC and will be developed by PT Overlook LLC.

## **DESCRIPTION OF PROPERTY**

The Site is approximately 350.8 acres consisting of mostly vacant, undeveloped land with native vegetation and a rural single-family residential home situated within the north of the Project Site and is classified as Agricultural Grazing Land. Vegetation within the site is characterized primarily by prairie grasses along with some area of scrub brush and trees. The Site does not currently provide water quality or detention for the Project area.

The existing topography consists of slopes ranging from 1% to 33% with an existing butte covering much of the northern portion of the Site. Flows in the existing conditions run off site into one of four major drainage basins. Detailed descriptions of the existing major drainage basins can be found later in the report.

According to NRCS soil mapping data, USCS Type B soils are the primary soil type within the site. Type B soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained, or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission. Soils mapping information has been provided in the **Appendix**.

The full development of this site will consist of 62, five (5) acre residential lots with roadway improvements, roadway grading, six full spectrum detention ponds, roadside ditches, culverts, and drainage swales. The property is planned to be developed as two separate filings.

## FLOODPLAIN STATEMENT

The Site is located outside the 100-year floodplain and within Zone X (an area of minimal flood hazard) as noted on the FEMA FIRM Map No. 08041C0350G revised on December 7, 2018 (See



Appendix).

## **DRAINAGE BASINS**

## MAJOR BASIN DESCRIPTIONS

The Project Site is tributary to four major drainage basins in the El Paso County Drainage Basin Map. Bijou Creek, East Kiowa Creek, Upper Black Squirrel, and La Vega Ranch Drainage Basins. These drainage basins are located in the north central portion of El Paso County. The northeast portion of the site is tributary to Bijou Creek Drainage Basin, the northwest portion of the site is tributary to Upper Black Squirrel Drainage Basin, and the southeast portion of the site is tributary to La Vega Ranch Drainage Basin. In an effort to simplify basin nomenclature, the following naming conventions have been used for both existing and proposed drainage sub-basins labeling. Proposed Basins have been designed in effort to keep runoff within the same existing basins, as to not transfer runoff between basins.

- A Upper Black Squirrel Drainage Basin (CHBS2000)
- B La Vega Ranch Drainage Basin (CHBR0400)
- C East Kiowa Creek Drainage Basin (KIKI0400)
- D Bijou Creek Drainage Basin (BIBI0200)

El Paso County Drainage Basin map has been provided in the **Appendix**. A summary of flows in existing and proposed conditions has been added to the **Appendix**.

## COMPLIANCE WITH PREVIOUIS FINAL DRAINAGE REPORT

A portion of the proposed Project Site falls within the existing approved "Final Drainage Report for Apex Ranch Estates" by Terra Nova Engineering, Inc. approval date September 3, 2008. The basins OS-1, OS-2, and OS-3 as outlined in the report are captured by the existing stormwater facilities. These sub-basins are part of proposed sub-basins C1, C2, and C3 in the proposed drainage study Area. Flows from sub basins C2 and C3 as described in detail later in this report, are to be captured and treated by a proposed private full spectrum extended detention basin. Flows from these basins will be at or below history values. In the proposed conditions sub-basin C3 (Which includes a portion of existing sub-basin OS-1) is to flow directly into the existing Apex Ranch subdivision. These flows are to be captured and treated by the existing stormwater facilities. The assumed impervious value of sub-basin OS-1 used in previous calculations is 10%, under the proposed conditions a conservative estimate of 11% was used. As the total area tributary to the existing stormwater infrastructure is less than that of the previously studied area and the studied impervious values are at extremely minor in nature, any changes in flows from sub-basin C3 will be insignificant. Excerpts from the previously approved FDR have been provided in the **Appendix**.

## **EXISTING SUB-BASIN DESCRIPTIONS**

Historically the runoff from the Site drains into one of four major drainage basins as described above. Slopes vary from 2-33% throughout the site with various natural features. The Site has



been divided into 13 onsite basins A1-A2, B1-B5, C1-C5, D1, and 5 offsite basins OS-A1 to OS-A2, and OS-C1 to OS-C3. The offsite basins are located west of the Site and generally flow west towards to existing stormwater infrastructure. Descriptions of each individual sub-basin can be found below.

## Sub-Basin A1

This on-site sub-basin consists of an area of 19.92 acres, located in the southwest corner of the Site. Drainage flows overland from the northeast to the southwest where it is captured by an existing culvert at DP 1 and outfalls west of Elbert Rd. The weighted imperviousness for this sub-basin is 8%. Runoff during the 5-year and 100-year events are 8.43 cfs and 38.41 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin A2

This on-site sub-basin consists of an area of 61.50 acres, located in the southwest corner of the Site. Drainage flows overland from the northeast to the southwest where it flows offsite at DP 2 into Reata subdivision south of the Site. The weighted imperviousness for this sub-basin is 1%. Runoff during the 5-year and 100-year events are 13.00 cfs and 87.58 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

#### Sub-Basin B1

This on-site sub-basin consists of an area of 45.75 acres, located in the south-central portion of the Site. Drainage flows overland from the north to the south where it flows offsite at DP 3 into Reata subdivision south of the Site. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 9.87 cfs and 72.48 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin B2

This on-site sub-basin consists of an area of 42.42 acres, located in the south-central portion of the Site. Drainage flows overland from the north to the south where it flows offsite at DP 4 into Reata subdivision south of the Site. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 9.41 cfs and 69.09 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin B3

This on-site sub-basin consists of an area of 49.65 acres, located in the southeast portion of the Site. Drainage flows overland from the north to the south where it flows offsite at DP 5 into Reata subdivision south of the Site. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 11.54 cfs and 84.76 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin B4

This on-site sub-basin consists of an area of 8.59 acres, located in the eastern portion of the Site. Drainage flows overland from west to east where it flows offsite at DP 6 into Homestead Ranch Park east of the Site. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 2.54 cfs and 18.64 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

#### Sub-Basin B5

This on-site sub-basin consists of an area of 8.95 acres, located in the eastern portion of the Site. Drainage flows overland from west to east where it flows offsite at DP 7 into Homestead Ranch Park east of the Site. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-



year and 100-year events are 2.67 cfs and 19.63 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin C1

This on-site sub-basin consists of an area of 53.41 acres, located in the central portion of the Site. Drainage flows overland from east to west where it flows offsite at DP 8 into offsite basin OS-C1 where flows travel overland into an existing roadside ditch and ultimately into an existing stormwater detention pond. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 13.04 cfs and 95.74 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

#### Sub-Basin C2

This on-site sub-basin consists of an area of 8.47 acres, located in the central portion of the Site. Drainage flows overland from northeast to southwest where it flows offsite at DP 9 into offsite basin OS-C2 where flows travel overland into an existing roadside ditch and ultimately into an existing stormwater detention pond. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 2.28 cfs and 16.77 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin C3

This on-site sub-basin consists of an area of 5.55 acres, located in the central portion of the Site. Drainage flows overland from east to west where it flows offsite at DP 10 into offsite basin OS-C3 where flows travel overland into an existing roadside ditch and then north along Fletcherville Lane. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 1.62 cfs and 11.89 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin C4

This on-site sub-basin consists of an area of 6.40 acres, located in the northern central portion of the Site. Drainage flows overland from south to north where it flows offsite at DP 11 into the agricultural grazing land to the north. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 1.89 cfs and 13.87 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

#### Sub-Basin C5

This on-site sub-basin consists of an area of 10.50 acres, located in the northern central portion of the Site. Drainage flows overland from south to north where it flows offsite at DP 12 into the agricultural grazing land to the north. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 2.96 cfs and 21.72 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## Sub-Basin D1

This on-site sub-basin consists of an area of 29.73 acres, located in the northeast portion of the Site. Drainage flows overland from southwest to northeast where it flows offsite at DP 13 Homestead Ranch Park east of the Site. The weighted imperviousness for this sub-basin is 0%. Runoff during the 5-year and 100-year events are 7.71 cfs and 56.62 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## **Sub-Basin OS-A1**

The off-site sub-basin consists of an area of 4.06 acres, located in the western central portion of the drainage study area. Drainage flows overland from the northeast to southwest where it is captured by an existing drainage culvert at DP 14 and directed west of Elbert Road. The weighted



imperviousness for this sub-basin is 19%. Runoff during the 5-year and 100-year events are 3.76 cfs and 12.49 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## **Sub-Basin OS-A2**

The off-site sub-basin consists of an area of 4.45 acres, located in the central portion of the drainage study area. Drainage flows overland from the north to south where it enters sub-basin A2 at DP 15 and follows the patterns described in sub-basin A2. The weighted imperviousness for this sub-basin is 19%. Runoff during the 5-year and 100-year events are 3.76 cfs and 12.49 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

#### Sub-Basin OS-C1

The off-site sub-basin consists of an area of 27.49 acres, located in the central portion of the drainage study area. Drainage flows overland from east to west where it enters the existing roadside ditch at Apex Ranch Road at DP 16 and is ultimately conveyed through an existing culvert to the existing detention pond just west of Fletcherville Road. The weighted imperviousness for this sub-basin is 9%. Runoff during the 5-year and 100-year events are 12.21 cfs and 59.93 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

#### Sub-Basin OS-C2

The off-site sub-basin consists of an area of 6.15 acres, located in the central portion of the drainage study area. Drainage flows overland from the east to west where it enters the existing roadside ditch at Apex Ranch Road at DP 17 and is ultimately conveyed through an existing culvert to the existing detention pond just west of Fletcherville Road. The weighted imperviousness for this sub-basin is 17%. Runoff during the 5-year and 100-year events are 4.26 cfs and 15.78 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## **Sub-Basin OS-C3**

The off-site sub-basin consists of an area of 21.89 acres, located in the northwest portion of the drainage study area. Drainage flows overland from the west to east where it enters the existing roadside ditch at Fletcherville Road and flows north at DP 18. The weighted imperviousness for this sub-basin is 11%. Runoff during the 5-year and 100-year events are 11.63 cfs and 51.77 cfs respectively. Refer to the **Appendix** for the Existing Conditions Drainage Map.

## PROPOSED SUB-BASIN DESCRIPTIONS

For the proposed condition, stormwater will generally maintain historic flow patterns. The proposed roadways will alter some of the existing flow paths. The roadway ditches will capture runoff from the roadways and direct flows via proposed culverts back to the existing flow paths, which will ultimately follow historic patterns or be capture by one of the six (6) proposed storm water ponds. The proposed Site has been divided into 15 onsite basins A1-A2, B1-B6, C1-C6, D1, and 5 offsite basins OS-A1 to OS-A2, and OS-C1 to OS-C3. The offsite basins are located west of the Site and generally flow west towards to an existing detention pond, and existing grass lined swales. Descriptions of each individual sub-basin can be found below. The off-site basins are fully developed and no changes to the upstream basins are anticipated. Based on the existing approved "Final Drainage Report for Apex Ranch Estates" by Terra Nova Engineering, Inc. approval date September 3, 2008, under proposed conditions flows will be released at less than historic rates and no additional flows will be added to the existing detention pond.

## Sub-Basin A1

This on-site sub-basin consists of an area of 19.55 acres, located in the southwest corner of the Site. Drainage flows overland from the northeast to the southwest where it is captured by an

Also discuss the proposed 6 detention basins. Verify the existing detention pond is functioning as intended and if the existing pond provides WQ treatment as well.

Kimley » Horn

existing culvert at DP 1 and outfalls west of Elbert Rd. There are no proposed improvements in sub-basin A1. The weighted imperviousness for this sub-basin is 15%. Runoff during the 5-year and 100-year events are 10.41 cfs and 41.24 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin A2

This on-site sub-basin consists of an area of 58.27 acres, located in the southwest corner of the Site. Improvements within this sub-basin include proposed roads, roadside ditches, culverts, and proposed private stormwater pond A2. Drainage flows overland from the northeast to the southwest where it flows into proposed roadside ditches, is conveyed through proposed stormwater culverts, and is ultimately captured by propose private stormwater pond A2 at DP 2. The weighted imperviousness for this sub-basin is 12%. Runoff during the 5-year and 100-year events are 20.99 cfs and 92.96 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin B1

This on-site sub-basin consists of an area of 40.74 acres, located in the south-central portion of the Site. Improvements within this sub-basin include proposed roads, roadside ditches, culverts, and proposed private stormwater pond B1. Drainage flows overland from the north to the south where it flows into proposed roadside ditches, is conveyed through proposed stormwater culverts, and is ultimately captured by propose private stormwater pond B1 at DP 3. The weighted imperviousness for this sub-basin is 10%. Runoff during the 5-year and 100-year events are 16.77 cfs and 80.40 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

#### Sub-Basin B2

This on-site sub-basin consists of an area of 16.00 acres, located in the south-central portion of the Site. Drainage flows overland from the north to the south where it flows offsite at DP 4. Improvements within this sub-basin include proposed private roads. This sub-basin includes an approx. 14,351 sq ft improved area of roadway that will not be receiving water quality treatment. The weighted imperviousness for this sub-basin is 9%. Runoff during the 5-year and 100-year events are 7.82 cfs and 38.64 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin B3

This on-site sub-basin consists of an area of 19.11 acres, located in the southeastern portion of the Site. Drainage flows overland from the northwest to southeast where it flows off site at DP 5. There are no proposed improvements within this sub-basin. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 7.83 cfs and 42.71 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin B4

This on-site sub-basin consists of an area of 8.50 acres, located in the eastern portion of the Site. Drainage flows overland from west to east where it flows offsite at DP 6. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 3.77 cfs and 20.58 cfs respectively. Refer to the **Appendix** for the proposed Conditions Drainage Map.

## Sub-Basin B5

This on-site sub-basin consists of an area of 8.95 acres, located in the eastern portion of the Site. Drainage flows overland from west to east where it flows offsite at DP 7. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 4.01 cfs and 21.85 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

There are basins that are not being captured by the proposed ponds, such as Basin B2 (see highlights throughout the basins). Explain in the narrative how WQ is being addressed for these basins. Possible exclusions include I.7.1,B.7 (land disturbance to undeveloped land that will remain undeveloped) and/or I.7.1.C.1 (which allows for 20% not to exceed 1 acre of the applicable development site area to not be captured).



## Sub-Basin B6

This on-site sub-basin consists of an area of 53.31 acres, located in the central portion of the Site. Improvements within this sub-basin include proposed roads, roadside ditches, and culverts. Drainage flows overland from the northeast to the southwest where it flows into proposed roadside ditches, is conveyed through a proposed stormwater culvert at DP 8, and into sub-basin B8. The weighted imperviousness for this sub-basin is 10%. Runoff during the 5-year and 100-year events are 22.55 cfs and 106.95 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin B7

This on-site sub-basin consists of an area of 2.46 acres, located in the southern portion of the Site. Drainage flows overland from the north to south where it flows off site at DP 9. There are no proposed improvements within this sub-basin. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 1.13 cfs and 6.17 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin B8

This on-site sub-basin consists of an area of 9.52 acres, located in the southern portion of the Site. Drainage flows overland from the north to south where it is captured by proposed private full spectrum extended detention basin B8 at DP 10. Aside from the proposed extended detention basin there are no proposed improvements within this sub-basin. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 4.22 cfs and 23.05 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

#### Sub-Basin C1

This on-site sub-basin consists of an area of 25.91 acres, located in the central portion of the Site. Drainage flows overland from east to west where it flows offsite at DP 11 into offsite basin OS-C1 where flows travel overland into an existing roadside ditch and ultimately into an existing stormwater detention pond. Improvements within this sub-basin include proposed private roads. This sub-basin includes an approx. 22,316 sq ft improved area of roadway that will not be receiving water quality treatment. The weighted imperviousness for this sub-basin is 9%. Runoff during the 5-year and 100-year events are 11.18 cfs and 55.47 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

#### Sub-Basin C2

This on-site sub-basin consists of an area of 17.03 acres, located in the central portion of the Site. Drainage flows overland from northeast to southwest where it is captured by proposed roadside ditches and is ultimately conveyed to proposed private stormwater pond C2 at DP 12. Improvements within this sub-basin include proposed private roads, and a proposed private stormwater pond. The weighted imperviousness for this sub-basin is 12%. Runoff during the 5-year and 100-year events are 8.08 cfs and 34.64 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin C3

This on-site sub-basin consists of an area of 3.96 acres, located in the central portion of the Site. Drainage flows overland from east to west where it flows offsite at DP 13 into offsite basin OS-C3 where flows travel overland into an existing roadside ditch and then north along Fletcherville Lane. Improvements within this sub-basin include proposed private roads. This sub-basin includes an approx. 6,530 sq ft improved area of roadway that will not be receiving water quality treatment. The weighted imperviousness for this sub-basin is 11%. Runoff during the 5-year and 100-year events are 2.36 cfs and 10.80 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.



## Sub-Basin C4

This on-site sub-basin consists of an area of 6.37 acres, located in the northern central portion of the Site. Drainage flows overland from south to north where it flows offsite at DP 14. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 2.83 cfs and 15.42 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

#### Sub-Basin C5

This on-site sub-basin consists of an area of 10.50 acres, located in the northern central portion of the Site. Drainage flows overland from south to north where it flows offsite at DP 15. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 4.44 cfs and 24.20 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin C6

This on-site sub-basin consists of an area of 21.29 acres, located in the eastern central portion of the Site. Improvements within this sub-basin include proposed roads, roadside ditches, a stormwater pond, and culverts Drainage flows overland from west to east where it gets captured by roadside ditches and ultimately flows to proposed private stormwater pond C6 at DP 16. The weighted imperviousness for this sub-basin is 13%. Runoff during the 5-year and 100-year events are 12.27 cfs and 50.85 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## Sub-Basin D1

This on-site sub-basin consists of an area of 29.38 acres, located in the northeast portion of the Site. Improvements within this sub-basin include proposed roads, roadside ditches, a stormwater pond, and culverts Drainage flows overland from southwest to northeast where it gets captured by roadside ditches and ultimately flows to proposed private stormwater pond D1 at DP 17. The weighted imperviousness for this sub-basin is 9%. Runoff during the 5-year and 100-year events are 13.56 cfs and 67.33 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

#### Sub-Basin OS-A1

The off-site sub-basin consists of an area of 4.06 acres, located in the western central portion of the drainage study area. Drainage flows overland from the northeast to southwest where it is captured by an existing drainage culvert at DP 18 and directed west of Elbert Road. The weighted imperviousness for this sub-basin is 25%. Runoff during the 5-year and 100-year events are 4.12 cfs and 12.86 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## **Sub-Basin OS-A2**

The off-site sub-basin consists of an area of 4.45 acres, located in the central portion of the drainage study area. Drainage flows overland from the north to south where it enters sub-basin A2 at DP 19 and follows the patterns described in sub-basin A2. The weighted imperviousness for this sub-basin is 7%. Runoff during the 5-year and 100-year events are 2.10 cfs and 11.46 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

#### Sub-Basin OS-C1

The off-site sub-basin consists of an area of 27.49 acres, located in the central portion of the drainage study area. Drainage flows overland from east to west where it enters the existing roadside ditch at Apex Ranch Road at DP 20 and is ultimately conveyed through an existing culvert to the existing detention pond just west of Fletcherville Road. The weighted imperviousness for this sub-basin is 9%. Runoff during the 5-year and 100-year events are 12.21 cfs and 59.93 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.



## **Sub-Basin OS-C2**

The off-site sub-basin consists of an area of 6.15 acres, located in the central portion of the drainage study area. Drainage flows overland from the east to west where it enters the existing roadside ditch at Apex Ranch Road at DP 21 and is ultimately conveyed through an existing culvert to the existing detention pond just west of Fletcherville Road. The weighted imperviousness for this sub-basin is 17%. Runoff during the 5-year and 100-year events are 4.26 cfs and 15.78 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## **Sub-Basin OS-C3**

The off-site sub-basin consists of an area of 21.89 acres, located in the northwest portion of the drainage study area. Drainage flows overland from the west to east where it enters the existing roadside ditch at Fletcherville Road and flows north at DP 22. The weighted imperviousness for this sub-basin is 11%. Runoff during the 5-year and 100-year events are 11.63 cfs and 51.77 cfs respectively. Refer to the **Appendix** for the Proposed Conditions Drainage Map.

## DRAINAGE DESIGN CRITERIA

## DEVELOPMENT CRITERIA REFERENCE

The proposed storm facilities are designed to be in compliance with the City of Colorado Springs and El Paso County "Drainage Criteria Manual (DCM)" dated October 2018 ("the MANUAL"), El Paso County "Engineering Criteria Manual" ("the Engineering Manual"), Chapter 6 and Section 3.2.1 of Chapter 13 of the City of Colorado Springs Drainage Criteria Manual dated May 2014 ("the Colorado Springs MANUAL").

Site drainage is not significantly impacted by such constraints as utilities or existing development.

## HYDROLOGIC CRITERIA

The 5-year and 100-year design storm events were used in determining rainfall and runoff for the proposed drainage system per chapter 6 of the CRITERIA. Table 6-2 of the CRITERIA is the source for rainfall data for the 5-year and 100-year design storm events. Design runoff was calculated using the Rational Method for developed conditions as established in the CRITERIA and MANUAL. Runoff coefficients for the proposed development were determined using Table 6-6 of the CRITERIA by calculating weighted impervious values for each specific site basin. The detention storage requirement was calculated using Full Spectrum Detention methods as specified in the CRITERIA and MANUAL.

## HYDRAULIC CRITERIA

Applicable design methods were utilized to size the proposed ponds, and culverts, which includes the use of the UD-Detention spreadsheet, rational calculations spreadsheet, and FlowMaster, V8i software.

## DETENTION

Is the existing detention pond proposed to be used for detention/flood control as well as the 6 proposed? Please clearly distinguish.

Six full spectrum detention ponds are proposed in order to maintain historic flows and water quality. Mile High Flood District's UD-detention spreadsheet was utilized to design the preliminary sizing of each pond. Preliminary sizing table can be found below. UD-Detention Sizing calculations can be found in the Appendix.



## **Pond Calculation Comparison Table**

Pond	Basin Area (Acres)	WQCV Volume* (Ac-ft)	100YR Volume (Ac-ft)	Total Volume Required (Ac-ft)	Total Volume Provided (Ac-ft)
A2	58.27	0.120	1.679	2.346	3.722
B1	40.74	0.048	1.120	1.503	2.132
В8	62.83	0.069	1.680	2.207	3.484
C2	17.03	0.042	0.491	0.686	1.033
C6	21.29	0.061	0.626	0.891	1.463
D1	29.38	0.025	0.786	1.032	1.724

<sup>\*</sup>WQCV volume is sized only for proposed impervious roadways

## **CULVERT SIZING**

Detailed sizing of the road culvert crossings will be included in a subsequent Final Drainage Report. It is anticipated that 18"-72" pipes will be sufficient for the proposed culverts.

## CHANNEL STABILIZATION

There is no anticipated need for channel stabilization within the site.

Discuss the condition of the channels

## THE FOUR STEP PROCESS

The Project was designed in accordance with the four-step process to minimize adverse impacts of urbanization, as outlined in the El Paso County Engineering Manual for BMP selection as noted below:

**Step 1. Employ Runoff Reduction Practices** – The project is proposing a low-density residential development that will be designed to minimize the impact to the current existing terrain. The Site's proposed paved roadways will increase the Site's impervious area, however, roadside ditches and channels will be constructed to slow down the runoff velocity and reduce runoff peaks. The six proposed detention ponds will be used to capture stormwater, provide water quality treatment, and maintain flows discharging off site at or below historic levels.

Is the existing detention pond proposed to be used for WQ as well as the 6 proposed? Please clearly distinguish.

Step 2. Provide a Water Quality Capture Volume — Permanent water quality measures and detention facilities will be necessary for the Project. Temporary water quality and erosion control measures will be provided during construction to prevent sediment laden water from discharging from the Site. The required water quality capture volume will be required to be treated for all roadway surfaces, excluding 1.0 acres which cannot practicably be treated. Per ECM Appendix I Section 1.7.C.A., 20% of the development site





or less than 1 acre can be excluded from providing water quality. As mentioned, 0.99 acres (43,197 sq ft of impervious area will not be able to be treated which is less than 20% of the overall site. Per ECM Appendix I Section 1.7.1.B, large lot development is exempt from water quality treatment requirement, lot imperviousness shall be limited to 10 percent or less. Refer to **Appendix F** for PBMP Tributary Areas map.

**Step 3 Stabilize Drainageways**— Stabilizing proposed roadside ditches, swales, and channels by designing them with slopes that control the flow rates. Placement of riprap upstream and downstream of culverts to help reduce erosion of the roadside ditches. Check dams will be used in areas with steeper grades to slow the runoff. We anticipate this will minimize erosion. Existing drainage ways will be graded to reduce the velocity of the water to minimize erosion.

**Step 4. Implement Site Specific and Other Source Control BMPs** – The erosion control construction BMPs of the Project were designed to reduce contamination. Source control BMPs include the use of vehicle tracking control, culvert protection, stockpile management, and stabilized staging areas.

## **DRAINAGE FEES**

## **FEES**

The project is within the Upper Black Squirrel Drainage Basin (CHBS2000), La Vega Ranch Drainage Basin (CHBR0400), East Kiowa Creek Drainage Basin (KIKI0400), and Bijou Creek Drainage Basin (BIBI0200) all four of which are not part of the El Paso County Drainage Basin Fee Program. As such, no drainage fees are due with this Project.

## **SUMMARY**

This report has been prepared in accordance with EI Paso County stormwater criteria. It outlines the Site design for the 5-year and 100-year storm events drainage system. The drainage design presented within this report conforms to the criteria presented in the MANUAL Additionally, the Site runoff and storm drain facilities will not adversely affect the downstream and surrounding developments.



## **REFERENCES**

- 1. Final Drainage Report for Apex Ranch Estates by Terra Nova Engineering, Inc. dated September 3, 2008
- 2. El Paso County "Engineering Criteria Manual" Volumes 1 & 2, dated October 31, 2018
- 3. Natural Resources Conservation Service, Web Soil Survey, dated June 21, 2023.
- 4. Urban Drainage and Flood Control District Drainage Criteria Manuals (UDFCDCM), (Volumes 1, 2 and 3), prepared by Wright-McLaughlin Engineers, June 2001, with latest revisions.
- 5. Flood Insurance Rate Map, El Paso County, Colorado and Incorporated Areas, Map Number 08041C0350G, Effective Date December 7, 2018, prepared by the Federal Emergency Management Agency (FEMA).




## **APPENDIX**



## APPENDIX A: VICINITY MAP





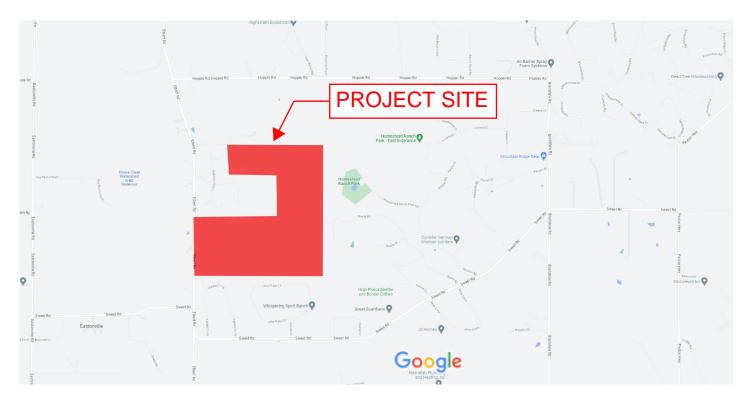

Map data ©2023 1000 ft **■** 

## APPENDIX B: FEMA MAP & SOILS REPORT



## NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where Base Flood Elevations (BFEs) and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

Coastal Base Flood Elevations shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the floodways were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by flood control structures. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The projection used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The horizontal datum was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the North American Vertical Datum of 1988 (NAVD88). These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**.For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website a http://www.ngs.noaa.gov/ or contact the National Geodetic Survey at the following

NGS Information Services NOAA, N/NGS12 National Geodetic Survey SSMC-3, #9202 1315 East-West Highway Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for bench marks shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at http://www.ngs.noaa.gov/.

Base Map information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, City of Fountain, Bureau of Land Management, National Oceanic and Atmospheric Administration, United States Geological Survey, and Anderson Consulting Engineers, Inc. These data are current as of 2006.

This map reflects more detailed and up-to-date stream channel configurations and floodplain delineations than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channe distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile aselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

Corporate limits shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed Map Index for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is


Contact FEMA Map Service Center (MSC) via the FEMA Map Information eXchange (FMIX) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website http://www.msc.fema.gov/.

If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call **1-877-FEMA MAP** (1-877-336-2627) or visit the FEMA website at http://www.fema.gov/business/nfip.

Flooding Source REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION

El Paso County Vertical Datum Offset Table


Panel Location Map

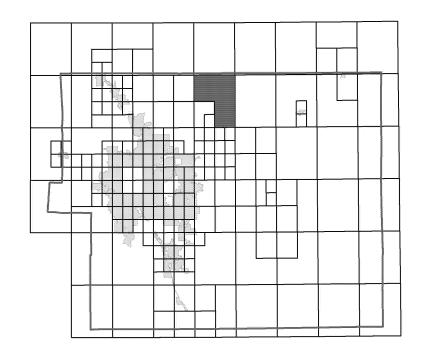

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).



Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

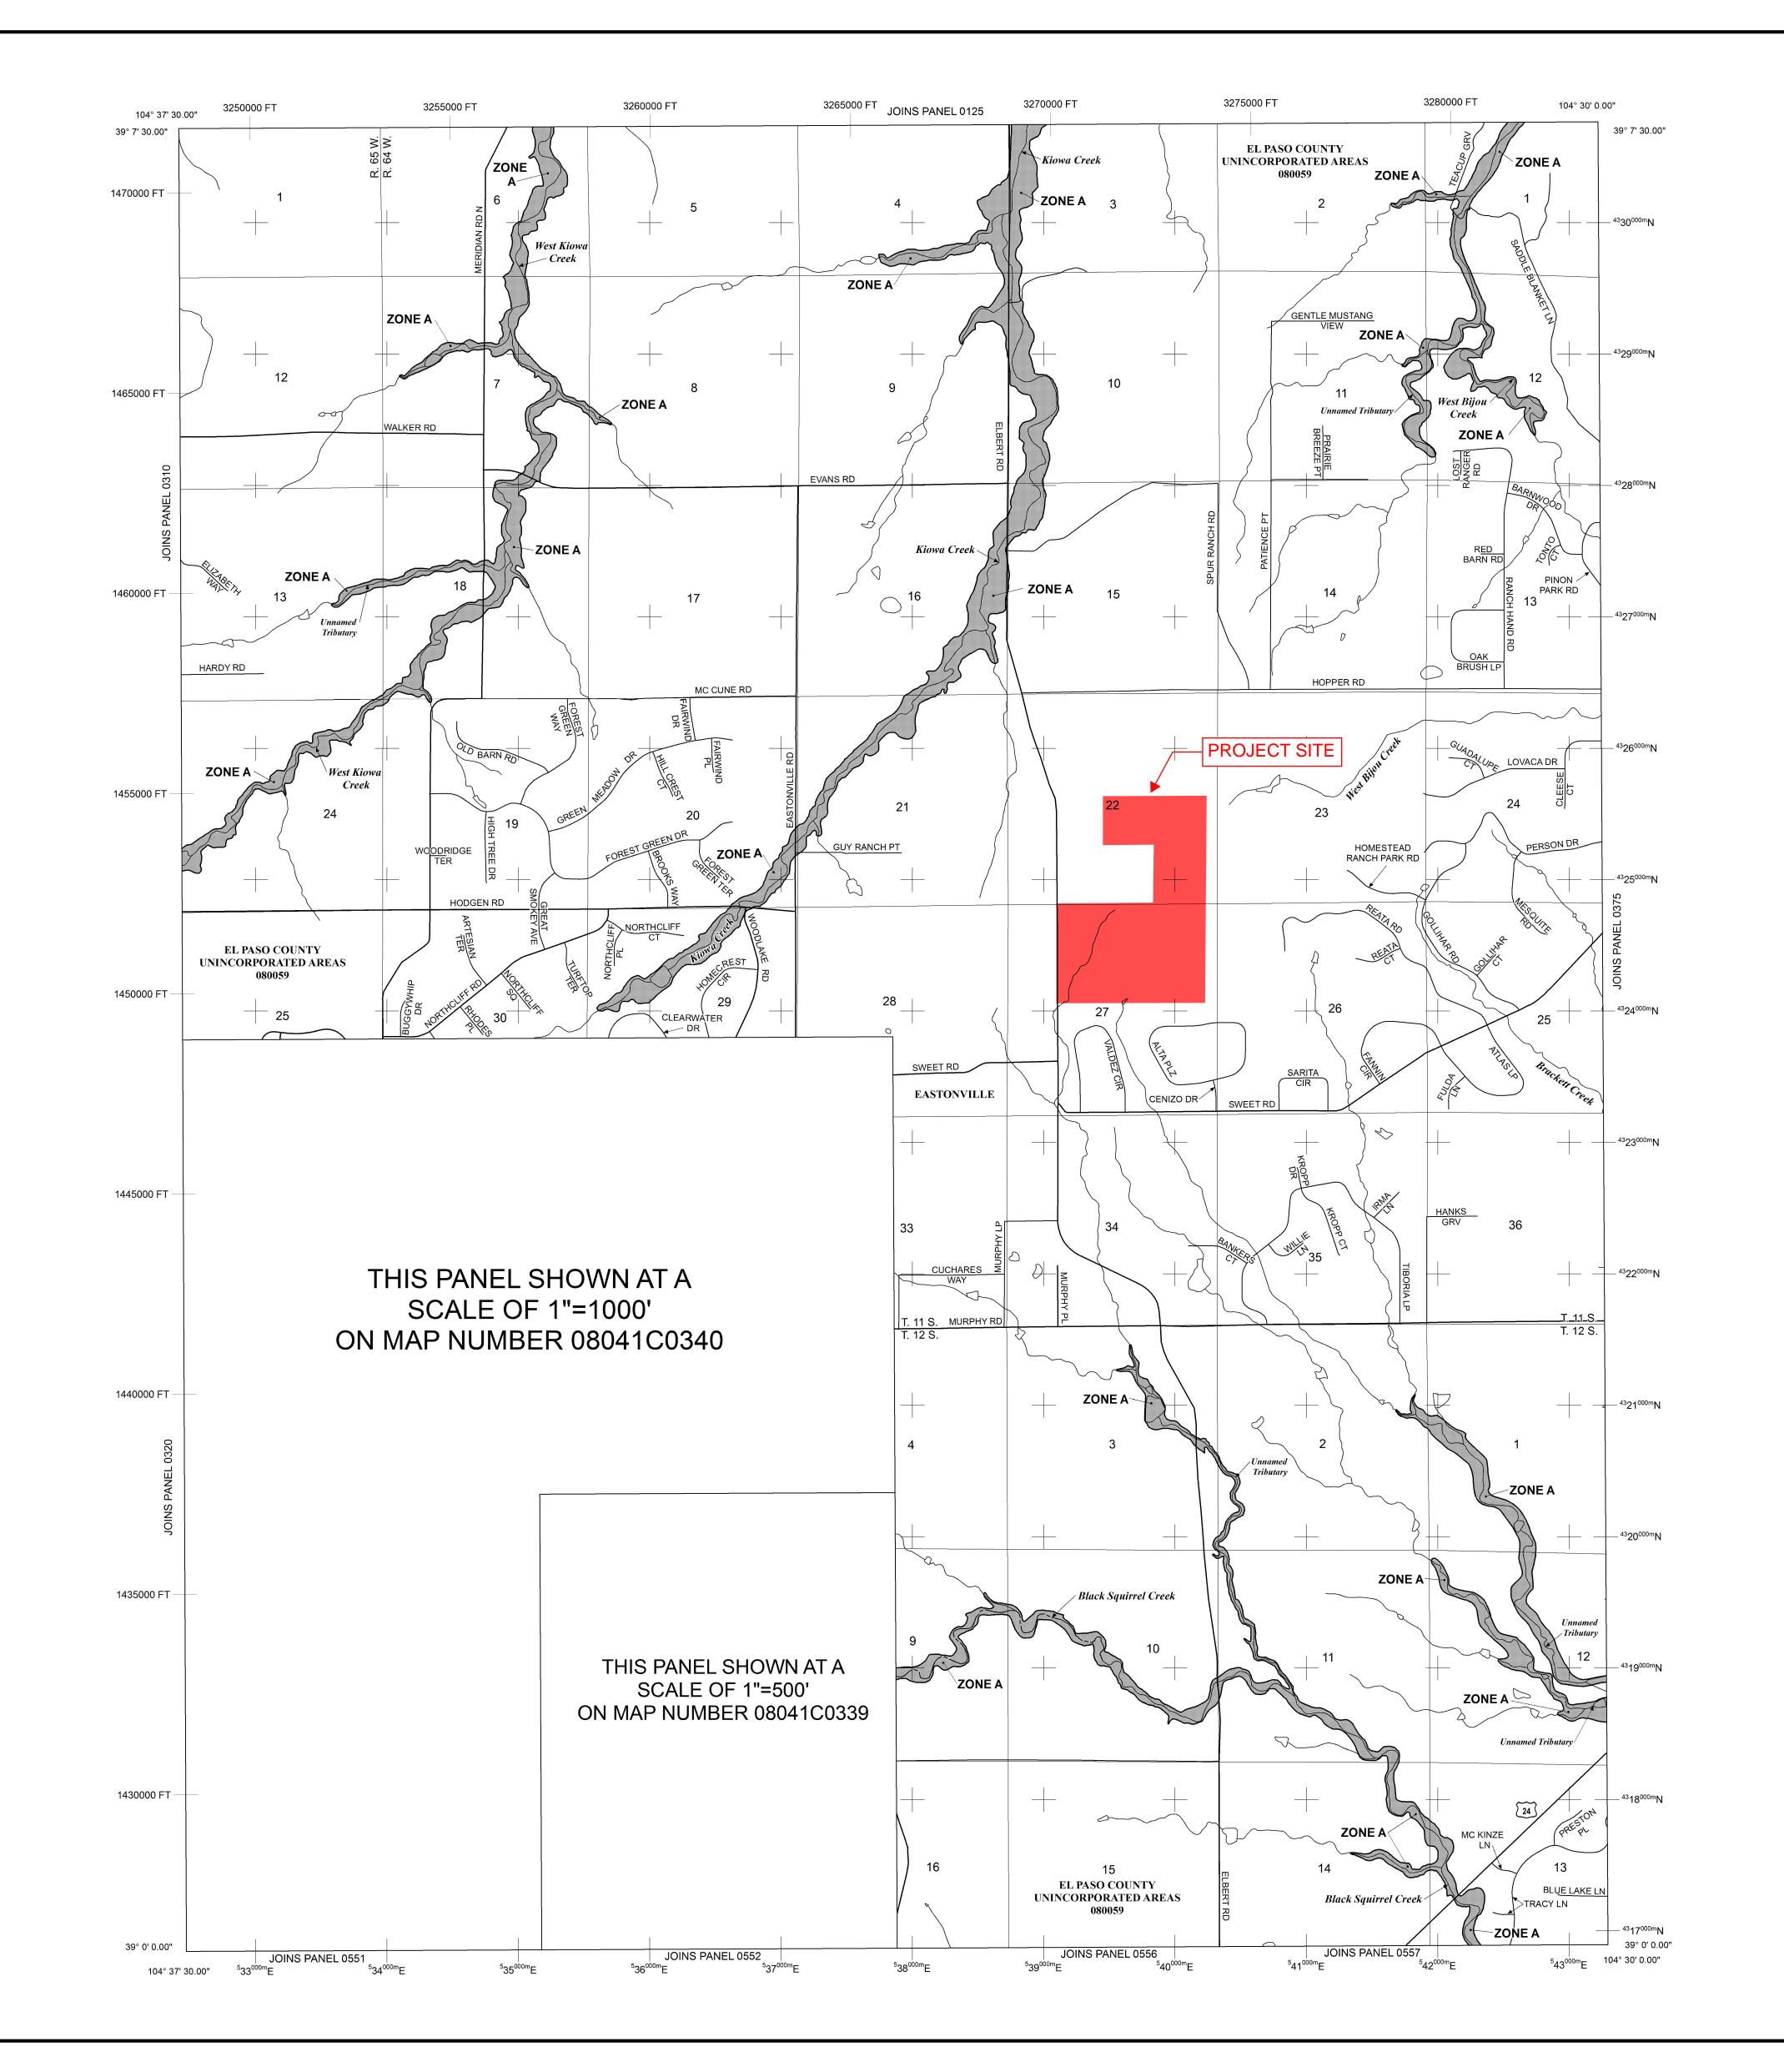

## **LEGEND**

SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD

The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equaled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.

**ZONE A** No Base Flood Elevations determined. Base Flood Elevations determined.

Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood

**ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also

**ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.

**ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations

Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined Coastal flood zone with velocity hazard (wave action); Base Flood

FLOODWAY AREAS IN ZONE AE

Elevations determined.

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.

OTHER FLOOD AREAS

Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.

OTHER AREAS Areas determined to be outside the 0.2% annual chance floodplain.

Areas in which flood hazards are undetermined, but possible.

COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS

OTHERWISE PROTECTED AREAS (OPAs)

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.

Floodplain boundary Floodway boundary Zone D Boundary

••••••• CBRS and OPA boundary

Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities. Base Flood Elevation line and value; elevation in feet\*

(EL 987) Base Flood Elevation value where uniform within zone; elevation in feet\* \* Referenced to the North American Vertical Datum of 1988 (NAVD 88)

Cross section line

97° 07' 30 00" Geographic coordinates referenced to the North American 32° 22' 30.00" Datum of 1983 (NAD 83)

1000-meter Universal Transverse Mercator grid ticks,

5000-foot grid ticks: Colorado State Plane coordinate 6000000 FT system, central zone (FIPSZONE 0502),

Bench mark (see explanation in Notes to Users section of

this FIRM panel)

MAP REPOSITORIES Refer to Map Repositories list on Map Index

FLOOD INSURANCE RATE MAP MARCH 17, 1997 EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL

DECEMBER 7, 2018 - to update corporate limits, to change Base Flood Elevations and

Special Flood Hazard Areas, to update map format, to add roads and road names, and to

EFFECTIVE DATE OF COUNTYWIDE

incorporate previously issued Letters of Map Revision.

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance

agent or call the National Flood Insurance Program at 1-800-638-6620.

**PANEL 0350G** 

**FIRM** 

EL PASO COUNTY, **COLORADO** AND INCORPORATED AREAS

**FLOOD INSURANCE RATE MAP** 

**PANEL 350 OF 1300** 

(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

<u>PANEL</u>

Notice to User: The Map Number shown below should be used when placing map orders: the Community Number shown above should be used on insurance applications for the




**MAP REVISED** 

MAP NUMBER

08041C0350G

**DECEMBER 7, 2018** 

Federal Emergency Management Agency

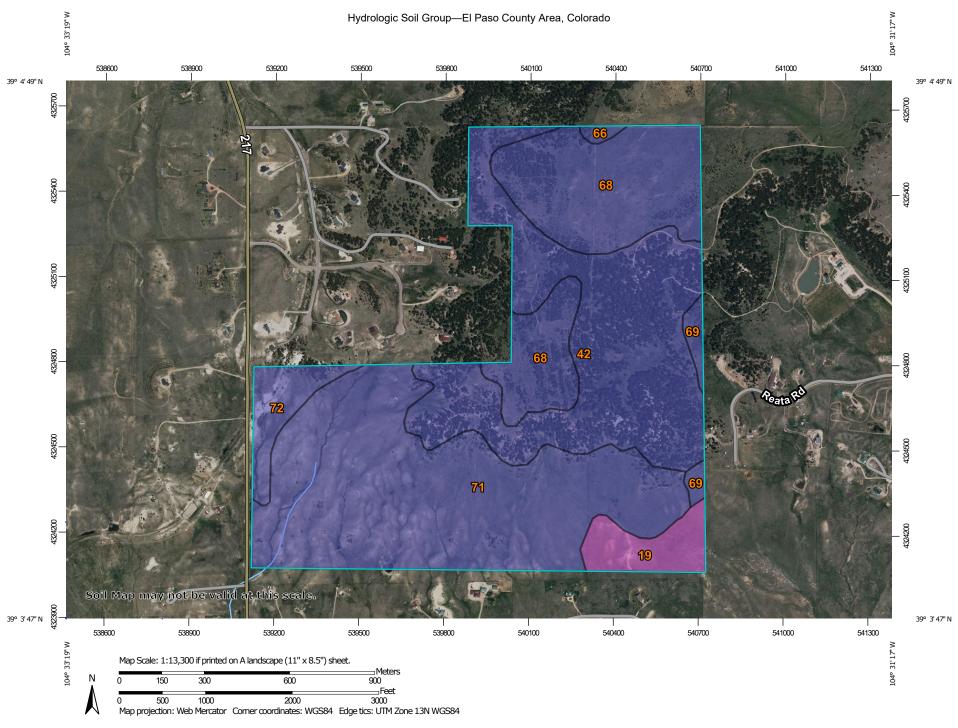

#### MAP LEGEND MAP INFORMATION The soil surveys that comprise your AOI were mapped at Area of Interest (AOI) С 1:24.000. Area of Interest (AOI) C/D Soils Warning: Soil Map may not be valid at this scale. D Soil Rating Polygons Enlargement of maps beyond the scale of mapping can cause Not rated or not available Α misunderstanding of the detail of mapping and accuracy of soil **Water Features** line placement. The maps do not show the small areas of A/D Streams and Canals contrasting soils that could have been shown at a more detailed Transportation B/D Rails ---Please rely on the bar scale on each map sheet for map measurements. Interstate Highways C/D Source of Map: Natural Resources Conservation Service **US Routes** Web Soil Survey URL: D Major Roads Coordinate System: Web Mercator (EPSG:3857) Not rated or not available -Local Roads Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts Soil Rating Lines Background distance and area. A projection that preserves area, such as the Aerial Photography Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required. This product is generated from the USDA-NRCS certified data as of the version date(s) listed below. Soil Survey Area: El Paso County Area, Colorado Survey Area Data: Version 20, Sep 2, 2022 Soil map units are labeled (as space allows) for map scales 1:50.000 or larger. Not rated or not available Date(s) aerial images were photographed: Jun 9, 2021—Jun 12. 2021 **Soil Rating Points** The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background A/D imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident. B/D

## **Hydrologic Soil Group**

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
19	Columbine gravelly sandy loam, 0 to 3 percent slopes	A	18.1	4.1%
42	Kettle-Rock outcrop complex	В	135.4	30.8%
66	Peyton sandy loam, 1 to 5 percent slopes	В	1.7	0.4%
68	Peyton-Pring complex, 3 to 8 percent slopes	В	91.1	20.7%
69	Peyton-Pring complex, 8 to 15 percent slopes	В	5.6	1.3%
71	Pring coarse sandy loam, 3 to 8 percent slopes	В	171.8	39.0%
72	Pring coarse sandy loam, 8 to 15 percent slopes	В	16.2	3.7%
Totals for Area of Inter	rest		440.0	100.0%

## **Description**

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

## **Rating Options**

Aggregation Method: Dominant Condition

Component Percent Cutoff: None Specified

Tie-break Rule: Higher

## APPENDIX C: HYDROLOGY



## Kimley**≫Horn**

## STANDARD FORM SF-1 RUNOFF COEFFICIENTS - IMPERVIOUS CALCULATION EXISTING CONDITIONS

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS CHECKED RV- KBV

DATE: 7/18/2023

SOIL: B	OI: KKK	RESIDENTIAL (>5AC)	PASTURE/MEADOW (SOIL GROUP A/B)	PAVEMENT							
	LAND USE:		AREA	AREA	AREA						
	2-YEAR COEFF.	0.05	0.02	0.89	- IIII						
	5-YEAR COEFF.	0.12	0.08	0.90							
	10-YEAR COEFF.	0.20	0.15	0.92							
	100-YEAR COEFF.	0.39	0.35	0.96							
	IMPERVIOUS %	7%	0%	100%							
DESIGN BASIN	DESIGN POINT	RESIDENTIAL (>5AC) <u>AREA</u> (AC)	PASTURE/MEADOW (SOIL GROUP A/B) <u>AREA</u> (AC)	PAVEMENT AREA (AC)	AREA (AC)	TOTAL AREA (AC)	C(2)	C(5)	C(10)	C(100)	Imp %
	TOINT	(AC)	(AC)	(AC)	(AC)	(AC)	C(2)	C(3)	C(10)	C(100)	ппр л
DR Basins											
Al	1		18.28	1.64		19.92	0.09	0.15	0.21	0.40	8%
A2	2		60.84	0.66		61.50	0.03	0.09	0.16	0.36	1%
Bl	3		45.75			45.75	0.02	0.08	0.15	0.35	0%
B2	4		42.42			42.42	0.02	0.08	0.15	0.35	0%
B3	5		49.65			49.65	0.02	0.08	0.15	0.35	0%
B4	6		8.59			8.59	0.02	0.08	0.15	0.35	0%
B5	7		8.95			8.95	0.02	0.08	0.15	0.35	0%
Cl	8		53.41			53.41	0.02	0.08	0.15	0.35	0%
C2	9		8.47			8.47	0.02	0.08	0.15	0.35	0%
C3	10		5.55			5.55	0.02	0.08	0.15	0.35	0%
C4	11		6.40			6.40	0.02	0.08	0.15	0.35	0%
C5	12		10.50			10.50	0.02	0.08	0.15	0.35	0%
D1	13		29.73			29.73	0.02	0.08	0.15	0.35	0%
OS-A1	14		3.29	0.77		4.06	0.19	0.24	0.30	0.47	19%
OS-A2	15	4.45				4.45	0.05	0.12	0.20	0.39	7%
OS-C1	16	26.86		0.63		27.49	0.07	0.14	0.22	0.40	9%
OS-C2	17	5.48		0.67		6.15	0.14	0.20	0.28	0.45	17%
	18	20.84		1.05		21.89	0.09	0.16	0.23	0.42	11%
OS-C3	18										
	- OVERALL	57.63 14%	351.83 85%	5.42 1%	0.00	414.88 100%	0.04	0.10	0.17	0.36	2%



## STANDARD FORM SF-2 Time of Concentration

EXISTING CONDITIONS

DATE: 7/18/2023

PROJECT NAME: Overlook
PROJECT NUMBER: 196239003
CALCULATED BY: GKS
CHECKED BY: KRK

	SUB-BASIN INITIAL DATA TIME (T <sub>i</sub> )						TRA	AVEL TIM (T <sub>t</sub> )	Œ			(UR	Te CHEC			FINAL Te
DESIGN BASIN (1)	AREA Ac (2)	C5 (3)	LENGTH Ft (4)	SLOPE % (5)	T <sub>i</sub> Min. (6)	LENGTH Ft. (7)	SLOPE % (8)	C <sub>v</sub> (9)	VEL fps (11)	T <sub>t</sub> Min. (12)	COMP. tc (13)	TOTAL LENGTH (14)	TOTAL SLOPE (15)	TOTAL IMP. (16)	Tc <b>Min.</b> (17)	Min.
FDR Basins	, ,												· · ·		, ,	•
A1	19.92	0.15	300	18.0%	11.5	2,066	5.7%	2.5	0.6	57.7	69.2	2366	7.3%	8%	23.1	23.1
A2	61.50	0.09	300	18.0%	12.3	3,677	5.7%	2.5	0.6	102.7	114.9	3977	6.6%	1%	32.1	32.1
B1	45.75	0.08	300	25.0%	11.1	2,577	6.5%	2.5	0.6	67.4	78.5	2877	8.4%		26.0	26.0
B2	42.42	0.08	300	6.9%	17.0	2,347	10.3%	2.5	0.8	48.8	65.8	2647	9.9%		24.7	24.7
В3	49.65	0.08	300	23.0%	11.4	1,968	9.9%	2.5	0.8	41.7	53.1	2268	11.6%		22.6	22.6
B4	8.59	0.08	300	2.0%	25.7	308	13.4%	2.5	0.9	5.6	31.3	608	7.8%		13.4	13.4
B5	8.95	0.08	300	2.5%	23.9	243	2.4%	2.5	0.4	10.5	34.3	543	2.5%		13.0	13.0
C1	53.41	0.08	300	1.6%	27.7	1,593	6.3%	2.5	0.6	42.3	70.0	1893	5.6%		20.5	20.5
C2	8.47	0.08	300	25.0%	11.1	887	4.9%	2.5	0.6	26.7	37.8	1187	10.0%		16.6	16.6
C3	5.55	0.08	300	6.9%	17.0	383	5.6%	2.5	0.6	10.8	27.8	683	6.2%		13.8	13.8
C4	6.40	0.08	300	5.9%	17.9	317	6.4%	2.5	0.6	8.4	26.3	617	6.2%		13.4	13.4
C5	10.50	0.08	300	2.5%	23.9	602	14.8%	2.5	1.0	10.4	34.3	902	10.7%		15.0	15.0
D1	29.73	0.08	300	1.5%	28.3	1,153	1.6%	2.5	0.3	60.8	89.1	1453	1.6%		18.1	18.1
OS-A1	4.06	0.24	300	5.0%	16.1	161	5.0%	2.5	0.6	4.8	20.9	461	5.0%		12.6	12.6
OS-A2	4.45	0.12	250	10.0%	13.2			2.5			13.2	250	10.0%	19%	11.4	11.4
OS-C1	27.49	0.14	300	25.0%	10.4	1,195	5.0%	2.5	0.6	35.6	46.1	1495	9.0%	9%	18.3	18.3
OS-C2	6.15	0.20	300	5.8%	15.9	865	5.8%	2.5	0.6	24.0	39.9	1165	5.8%	17%	16.5	16.5
OS-C3	21.89	0.16	300	6.9%	15.7	874	6.9%	2.5	0.7	22.2	37.9	1174	6.9%	11%	16.5	16.5

 $t_i = \frac{0.395(1.1 - C_5)\sqrt{L_i}}{S_0^{0.33}} \qquad t_c = \frac{L}{180} + 10 \qquad V = C_v S_w^{0.5}$ 

Note: Conveyance coefficient from Table 6-7 of DCM



## STANDARD FORM SF-3 STORM DRAINAGE DESIGN - RATIONAL METHOD 2 YEAR EVENT

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS EXISTING CONDITIONS

DATE: 7/18/2023

CHECKED BY:		T		DIRE	CT RUN	JOFF			Т	OTAL I	DINO	FF	STR	FFT		PIPE	-	TRAV	TI TI	MF	REMARKS
STORM	DESIGN	DESIGN BASIN	AREA (AC)	RUNOFF COEFF	tc (min)	C*A(ac)	I (in/hr)	Q (cfs)	tc(max)	S(C*A) (ac)	I (in/hr)			ET (cfs		SLOPE (%)	PIPE SIZE (in)		VELOCIT Y	tt (min)	
(1)	(2)	(3)	(4)	(5)	(6)	<b>(7)</b>	(8)	<b>(9</b> )	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)
	1	A1	19.92	0.09	23.14	1.83	2.30	4.19													
	2	A2	61.50	0.03	32.09	1.80	1.91	3.44													
	3	B1	45.75	0.02	25.98	0.92	2.16	1.98													
	4	B2	42.42	0.02	24.71	0.85	2.22	1.88													
	5	В3	49.65	0.02	22.60	0.99	2.32	2.31													
	6	B4	8.59	0.02	13.38	0.17	2.95	0.51													
	7	В5	8.95	0.02	13.02	0.18	2.98	0.53													
	8	C1	53.41	0.02	20.52	1.07	2.44	2.61													
	9	C2	8.47	0.02	16.59	0.17	2.69	0.46													
	10	C3	5.55	0.02	13.79	0.11	2.91	0.32													
	11	C4	6.40	0.02	13.43	0.13	2.94	0.38													
	12	C5	10.50	0.02	15.01	0.21	2.81	0.59													
	13	D1	29.73	0.02	18.07	0.59	2.59	1.54													
	14	OS-A1	4.06	0.19	11.39	0.75	3.14	2.36													
	15	OS-A2	4.45	0.05	18.31	0.22	2.58	0.57													
	16	OS-C1	27.49	0.07	18.31	1.90	2.58	4.90													
	17	OS-C2	6.15	0.14	16.47	0.87	2.70	2.35													
	18	OS-C3	21.89	0.09	16.52	1.98	2.70	5.33													

Note: Rainfall intensity from Figure 6-5 IDF Equations

 $I_2 = -1.19 \ln(t_{c,min}) + 6.035$ 



## STANDARD FORM SF-3 STORM DRAINAGE DESIGN - RATIONAL METHOD 5 YEAR EVENT

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS EXISTING CONDITIONS

DATE: 7/18/2023

CHECKED BY: KRK  DIRECT RUNOFF TOTAL RUNOFF STREET PIPE TRAVEL TIME REMARKS																					
				DIRE	CT RUN	OFF			T	OTAL I	RUNO	FF	STR			PIPE				ME	REMARKS
STORM	DESIGN POINT	DESIGN BASIN	AREA (AC)	RUNOFF COEFF	tc (min)	C*A(ac)	I (in/hr)	Q (cfs)	tc(max)	S(C*A) (ac)	I (in/hr)	O (cfs)	SLOPE (%)	STREET FLOW(cfs	DESIGN FLOW(cfs )	SLOPE (%)	PIPE SIZE (in)	LENGTH (ft)	VELOCIT Y	tt (min)	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	<b>(9</b> )	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)
	1	A1	19.92	0.15	23.14	2.94	2.87	8.43													
	2	A2	61.50	0.09	32.09	5.46	2.38	13.00													
	3	B1	45.75	0.08	25.98	3.66	2.70	9.87													
	4	B2	42.42	0.08	24.71	3.39	2.77	9.41													
	5	В3	49.65	0.08	22.60	3.97	2.91	11.54													
	6	B4	8.59	0.08	13.38	0.69	3.69	2.54													
	7	В5	8.95	0.08	13.02	0.72	3.73	2.67													
	8	C1	53.41	0.08	20.52	4.27	3.05	13.04													
	9	C2	8.47	0.08	16.59	0.68	3.37	2.28													
	10	C3	5.55	0.08	13.79	0.44	3.65	1.62													
	11	C4	6.40	0.08	13.43	0.51	3.69	1.89													
	12	C5	10.50	0.08	15.01	0.84	3.52	2.96													
	13	D1	29.73	0.08	18.07	2.38	3.24	7.71													
	14	OS-A1	4.06	0.24	11.39	0.96	3.93	3.76													
	15	OS-A2	4.45	0.12	18.31	0.53	3.22	1.72													
	16	OS-C1	27.49	0.14	18.31	3.79	3.22	12.21													
	17	OS-C2	6.15	0.20	16.47	1.26	3.38	4.26													
	18	OS-C3	21.89	0.16	16.52	3.45	3.38	11.63													

Note: Rainfall intensity from Figure 6-5 IDF Equations

 $I_5 = -1.5 \ln(t_{c,min}) + 7.583$ 



## STANDARD FORM SF-3 STORM DRAINAGE DESIGN - RATIONAL METHOD 100 YEAR EVENT

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS EXISTING CONDITIONS DATE: 7/18/2023

CHECKED B				DIRE	CT RUI	OFF			T	OTAL F	RUNO	FF	STR	EET		PIPE		TRAV	EL TI	ME	REMARKS
STORM	DESIGN	DESIGN BASIN	AREA (AC)	RUNOFF COEFF	tc (min)	C*A(ac)	I (in/hr)	Q (cfs)	tc(max)	S(C*A) (ac)	I (in/hr)	Q (cfs)	SLOPE (%)	STREET FLOW(cfs	DESIGN FLOW(cfs )	SLOPE (%)	PIPE SIZE (in)	LENGTH (ft)	VELOCIT Y	tt (min)	
(1)	(2)	(3)	(4)	(5)	(6)	<b>(7)</b>	(8)	(9)	(10)	(11)	<b>(12)</b>	(13)	<b>(14)</b>	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)
	1	A1	19.92	0.40	23.14	7.97	4.82	38.41													
	2	A2	61.50	0.36	32.09	21.93	3.99	87.58													
	3	B1	45.75	0.35	25.98	16.01	4.53	72.48													
	4	B2	42.42	0.35	24.71	14.85	4.65	69.09													
	5	В3	49.65	0.35	22.60	17.38	4.88	84.76													
	6	B4	8.59	0.35	13.38	3.01	6.20	18.64													
	7	B5	8.95	0.35	13.02	3.13	6.27	19.63													
	8	C1	53.41	0.35	20.52	18.69	5.12	95.74													
	9	C2	8.47	0.35	16.59	2.96	5.66	16.77													
	10	C3	5.55	0.35	13.79	1.94	6.12	11.89													
	11	C4	6.40	0.35	13.43	2.24	6.19	13.87													
	12	C5	10.50	0.35	15.01	3.68	5.91	21.72													
	13	D1	29.73	0.35	18.07	10.41	5.44	56.62													
	14	OS-A1	4.06	0.47	11.39	1.89	6.60	12.49													
	15	OS-A2		0.39	18.31	1.74	5.41	9.39													
	16	OS-C1	27.49	0.40	18.31	11.08	5.41	59.93													
	17	OS-C2		0.45	16.47	2.78	5.67	15.78													
	18	OS-C3	21.89	0.42	16.52	9.14	5.67	51.77													

Note: Rainfall intensity from Figure 6-5 IDF Equations

 $I_{100} = -2.52 \ln(t_{c,min}) + 12.735$ 



PROJECT NAME: Overlook 7/18/2023

PROJECT NUMBER: 196239003 CALCULATED BY: GKS CHECKED BY: KRK

CHECKED BY						-
EXIS	STING COND	ITIONS RATIONAL	CALCULA	TIONS S	UMMAR'	Y
DESIGN POINT	TRIBUTARY	TRIBUTARY AREA		CFS		% IMPERVIOU
DESIGNT OINT	BASINS	(AC)	Q2	Q5	Q100	70 IIVII EIVVIOO
DR Basins						
1	A1	19.92	4.19	8.43	38.41	8%
2	A2	61.50	3.44	13.00	87.58	1%
3	B1	45.75	1.98	9.87	72.48	0%
4	B2	42.42	1.88	9.41	69.09	0%
5	В3	49.65	2.31	11.54	84.76	0%
6	B4	8.59	0.51	2.54	18.64	0%
7	B5	8.95	0.53	2.67	19.63	0%
8	C1	53.41	2.61	13.04	95.74	0%
9	C2	8.47	0.46	2.28	16.77	0%
10	C3	5.55	0.32	1.62	11.89	0%
11	C4	6.40	0.38	1.89	13.87	0%
12	C5	10.50	0.59	2.96	21.72	0%
13	D1	29.73	1.54	7.71	56.62	0%
14	OS-A1	4.06	2.36	3.76	12.49	19%
15	OS-A2	4.45	0.57	1.72	9.39	7%
16	OS-C1	27.49	4.90	12.21	59.93	9%
17	OS-C2	6.15	2.35	4.26	15.78	17%
18	OS-C3	21.89	5.33	11.63	51.77	11%
N-SITE BASIN TOT	AL			•	•	
BASIN A TO	OTAL	81.42	7.63	21.43	125.99	3%
BASIN B TO	OTAL	155.36	7.21	36.03	264.60	0%
BASIN C TO	OTAL	84.33	4.35	21.78	159.98	0%
BASIN D TO	OTAL	29.73	1.54	7.71	56.62	0%
ON-SITE TO	OTAL	350.84	20.73	86.96	607.18	1%
FF-SITE BASIN TO	TAL	-		•	•	•
OFF-SITE BA	SIN A	8.51	2.93	5.48	21.87	13%
OFF-SITE BA	ASIN C	55.53	12.58	28.11	127.48	11%
OFF-SITE T	OTAL	64.04	15.52	33.59	149.36	11%
SITE TOT	AL	414.88	36.25	120.55	756.54	2%

## Kimley**≫Horn**

## STANDARD FORM SF-1 RUNOFF COEFFICIENTS - IMPERVIOUS CALCULATION PROPOSED CONDITIONS

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS CHECKED BY: KRK

DATE: 8/7/2023

CHECKED B	I. KKK		PASTURE/MEADOW								
SOIL: B		RESIDENTIAL (>5AC)	(SOIL GROUP A/B)	PAVEMENT							
	LAND USE:	AREA	AREA	AREA	AREA						
	2-YEAR COEFF.	0.05	0.02	0.89							
	5-YEAR COEFF.	0.12	0.08	0.90		1					
	10-YEAR COEFF.	0.20	0.15	0.92		1					
	100-YEAR COEFF.	0.39	0.35	0.96		1					
	IMPERVIOUS %	7%	0%	100%		1					
			PASTURE/MEADOW								
		RESIDENTIAL (>5AC)	(SOIL GROUP A/B)	PAVEMENT		TOTAL					
DESIGN	DESIGN	AREA	AREA	AREA	AREA	AREA					
BASIN	POINT	(AC)	(AC)	(AC)	(AC)	(AC)	C(2)	C(5)	C(10)	C(100)	Imp %
FDR Basins	•										
Al	1	17.91		1.64		19.55	0.12	0.19	0.26	0.44	15%
A2	2	55.40		2.87		58.27	0.09	0.16	0.24	0.42	12%
Bl	3	39.58		1.16		40.74	0.07	0.14	0.22	0.41	10%
B2	4	15.66		0.34		16.00	0.07	0.14	0.22	0.40	9%
B3	5	19.11				19.11	0.05	0.12	0.20	0.39	7%
B4	6	8.50				8.50	0.05	0.12	0.20	0.39	7%
B5	7	8.95				8.95	0.05	0.12	0.20	0.39	7%
B6	8	51.65		1.66		53.31	0.08	0.14	0.22	0.41	10%
B7	9	2.46				2.46	0.05	0.12	0.20	0.39	7%
B8	10	9.52				9.52	0.05	0.12	0.20	0.39	7%
C1	11	25.38		0.53		25.91	0.07	0.14	0.21	0.40	9%
C2	12	16.03		1.00		17.03	0.10	0.17	0.24	0.42	12%
C3	13	3.80		0.16		3.96	0.08	0.15	0.23	0.41	11%
C4	14	6.37				6.37	0.05	0.12	0.20	0.39	7%
C5	15	10.50				10.50	0.05	0.12	0.20	0.39	7%
C6	16	19.82		1.47		21.29	0.11	0.17	0.25	0.43	13%
DI	17	28.79		0.59		29.38	0.07	0.14	0.21	0.40	9%
OS-A1	18	3.29		0.77		4.06	0.21	0.27	0.34	0.50	25%
OS-A2	19	4.45				4.45	0.05	0.12	0.20	0.39	7%
OS-C1	20	26.86		0.63		27.49	0.07	0.14	0.22	0.40	9%
OS-C2	21	5.48		0.67		6.15	0.14	0.20	0.28	0.45	17%
OS-C3	22	20.84		1.05		21.89	0.09	0.16	0.23	0.42	11%
		400.35	0.00	14.54	0.00	414.89	0.08	0.15	0.23	0.41	10%
TOTAL -	OVERALL	96%	0%	4%	0%	100%					
Note: I and use coeffic	cients sourced from City	of Colorado Springs Drai	nage Criteria Manual, Volu	me 1 Table 6-6					•		

## STANDARD FORM SF-2 **Time of Concentration**

PROPOSED CONDITIONS

DATE: 8/7/2023

PROJECT NAME: Overlook
PROJECT NUMBER: 196239003
CALCULATED BY: GKS
CHECKED BY: KRK

Note: Conveyance coefficient from Table 6-7 of DCM

$\begin{array}{ccc} SUB\text{-}BASIN & & INITIAL \\ DATA & & TIME \left(T_i\right) \end{array}$							TRA	AVEL TIM (T <sub>t</sub> )	E			(UF	Te CHEC			FINAL Te
DESIGN BASIN (1)	AREA Ac (2)	C5 (3)	LENGTH Ft (4)		T <sub>i</sub> Min. (6)	LENGTH Ft. (7)	SLOPE % (8)	C <sub>v</sub> (9)	VEL fps (11)	T <sub>t</sub> Min. (12)	COMP. tc (13)	TOTAL LENGTH (14)	TOTAL SLOPE (15)	TOTAL IMP. (16)	Tc Min. (17)	Min.
FDR Basins																
A1	19.55	0.19	300	18.0%	11.1	2,066	5.0%	2.5	0.6	61.6	72.7	2366	6.6%	15%	23.1	23.1
A2	58.27	0.16	300	18.0%	11.4	4,100	4.0%	2.5	0.5	136.7	148.1	4400	5.0%	12%	34.4	34.4
B1	40.74	0.14	300	8.0%	15.2	2,000	4.5%	2.5	0.5	62.9	78.1	2300	5.0%	10%	22.8	22.8
B2	16.00	0.14	300	7.0%	16.0	500	6.0%	2.5	0.6	13.6	29.6	800	6.4%	9%	14.4	14.4
В3	19.11	0.12	300	21.0%	11.3	800	8.0%	2.5	0.7	18.9	30.1	1100	11.5%	7%	16.1	16.1
B4	8.50	0.12	300	2.0%	24.7	300	13.5%	2.5	0.9	5.4	30.1	600	7.8%	7%	13.3	13.3
B5	8.95	0.12	300	2.5%	22.9	250	2.5%	2.5	0.4	10.5	33.5	550	2.5%	7%	13.1	13.1
B6	53.31	0.14	300	22.0%	10.8	1,900	3.0%	2.5	0.4	73.1	84.0	2200	5.6%	10%	22.2	22.2
В7	2.46	0.12	300	6.0%	17.1	100	6.0%	2.2	0.5	3.1	20.2	400	6.0%	7%	12.2	12.2
В8	9.52	0.12	300	6.0%	17.1	300	10.0%	2.5	0.8	6.3	23.5	600	8.0%	7%	13.3	13.3
C1	25.91	0.14	300	10.0%	14.2	1,300	8.0%	2.5	0.7	30.6	44.9	1600	8.4%	9%	18.9	18.9
C2	17.03	0.17	140	28.0%	6.7	2,250	3.0%	2.5	0.4	86.6	93.3	2390	4.5%	12%	23.3	23.3
C3	3.96	0.15	200	12.5%	10.6	50	3.0%	2.5	0.4	1.9	12.5	250	10.6%	11%	11.4	11.4
C4	6.37	0.12	300	5.5%	17.6	300	6.0%	2.5	0.6	8.2	25.8	600	5.8%	7%	13.3	13.3
C5	10.50	0.12	300	9.5%	14.7	600	11.0%	2.5	0.8	12.1	26.8	900	10.5%	7%	15.0	15.0
C6	21.29	0.17	300	3.0%	20.4	1,000	3.0%	2.5	0.4	38.5	58.9	1300	3.0%	13%	17.2	17.2
D1	29.38	0.14	300	1.0%	30.6	825	2.0%	2.5	0.4	38.9	69.5	1125	1.7%	9%	16.3	16.3
OS-A1	4.06	0.27	300	5.0%	15.5	161	5.0%	2.5	0.6	4.8	20.3	461	5.0%	25%	12.6	12.6
OS-A2	4.45	0.12	250	10.0%	13.2			2.5			13.2	250	10.0%	7%	11.4	11.4
OS-C1	27.49	0.14	300	25.0%	10.4	1,195	5.0%	2.5	0.6	35.6	46.1	1495	9.0%	9%	18.3	18.3
OS-C2	6.15	0.20	300	5.8%	15.9	865	5.8%	2.5	0.6	24.0	39.9	1165	5.8%	17%	16.5	16.5
OS-C3	21.89	0.16	300	6.9%	15.7	874	6.9%	2.5	0.7	22.2	37.9	1174	6.9%	11%	16.5	16.5
	$t_c = \frac{0.395(1.1 - C_5)\sqrt{L_i}}{S_0^{0.33}} \qquad t_c = \frac{L}{180} + 10$									<i>V</i> =	$: C_v S_w^{0.5}$					

 $t_i = \frac{0.395(1.1 - C_5)\sqrt{L_i}}{S_0^{0.33}}$ 

Prop Rational Calculations.xlsx Page 4 of 8

## STANDARD FORM SF-3 STORM DRAINAGE DESIGN - RATIONAL METHOD 2 YEAR EVENT

PROJECT NAME: Overlook
PROJECT NUMBER: 196239003
CALCULATED BY: GKS
CHECKED BY: KRK

PROPOSED CONDITIONS DATE: 8/7/2023

CHECKED BY: KRK  DIRECT RUNOFF								T	OTAL I	RUNO	FF	STREET PIPE					TRAV	EL TI	ME	REMARKS	
STORM	DESIGN	DESIGN BASIN	AREA (AC)	RUNOFF COEFF	tc (min)	C*A(ac)	I (in/hr)	Q (cfs)	tc(max)	S(C*A) (ac)	I (in/hr)	Q (cfs)		STREET FLOW(cfs	DESIGN FLOW(cfs )	SLOPE (%)	PIPE SIZE (in)	LENGTH (ft)	VELOCIT Y	tt (min)	1
(1)	(2)	(3)	(4)	(5)	(6)	<b>(7)</b>	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	<b>(17)</b>	(18)	(19)	(20)	(21)	(22)
	1	A1	19.55	0.12	23.14	2.36	2.30	5.41													
	2	A2	58.27	0.09	34.44	5.32	1.82	9.71													
	3	B1	40.74	0.07	22.78	3.01	2.32	6.97													
	4	B2	16.00	0.07	14.44	1.09	2.86	3.10													
	5	В3	19.11	0.05	16.11	0.96	2.73	2.61													
	6	B4	8.50	0.05	13.33	0.43	2.95	1.25													
	7	B5	8.95	0.05	13.06	0.45	2.98	1.33													
	8	В6	53.31	0.08	22.22	4.06	2.34	9.52													
	9	В7	2.46	0.05	12.22	0.12	3.06	0.38													
	10	B8	9.52	0.05	13.33	0.48	2.95	1.41													
	11	C1	25.91	0.07	18.89	1.74	2.54	4.42													
	12	C2	17.03	0.10	23.28	1.69	2.29	3.87													
	13	C3	3.96	0.08	11.39	0.33	3.14	1.04													
	14	C4	6.37	0.05	13.33	0.32	2.95	0.94													
	15	C5	10.50	0.05	15.00	0.53	2.81	1.48													
	16	C6	21.29	0.11	17.22	2.30	2.65	6.09													
	17	D1	29.38	0.07	16.25	1.96	2.72	5.34													
	18	OS-A1	4.06	0.21	12.56	0.85	3.02	2.57													
	19	OS-A2	4.45	0.05	11.39	0.22	3.14	0.70													
	20	OS-C1	27.49	0.07	18.31	1.90	2.58	4.90													
	21	OS-C2	6.15	0.14	16.47	0.87	2.70	2.35													
	22	OS-C3	21.89	0.09	16.52	1.98	2.70	5.33													

Note: Rainfall intensity from Figure 6-5 IDF Equations

 $I_2 = -1.19 \ln(t_{c,min}) + 6.035$ 

## STANDARD FORM SF-3 STORM DRAINAGE DESIGN - RATIONAL METHOD 5 YEAR EVENT

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS CHECKED BY: KRK PROPOSED CONDITIONS DATE: 8/7/2023

CHECKED BY	CHECKED BY: KRK  DIRECT RUNOFF TOTAL RUNOFF STREET PIPE TRAVEL TIME														22251223						
		·	DIRE	CT RUN	OFF			T	OTAL I	RUNO	FF	STR			PIPE		TRAV	EL TI	ME	REMARKS	
STORM	DESIGN	DESIGN BASIN	AREA (AC)	RUNOFF COEFF	tc (min)	C*A(ac)	I (in/hr)	Q (cfs)	tc(max)	S(C*A) (ac)	I (in/hr)	Q (cfs)	SLOPE (%)	STREET FLOW(cfs	DESIGN FLOW(cfs )	SLOPE (%)	PIPE SIZE (in)	LENGTH (ft)	VELOCIT Y	tt (min)	
(1)	(2)	(3)	(4)	(5)	(6)	<b>(7)</b>	(8)	(9)	(10)	(11)	<b>(12)</b>	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)
	1	A1	19.55	0.19	23.14	3.63	2.87	10.41													
	2	A2	58.27	0.16	34.44	9.23	2.27	20.99													
	3	B1	40.74	0.14	22.78	5.79	2.89	16.77													
	4	B2	16.00	0.14	14.44	2.19	3.58	7.82													
	5	В3	19.11	0.12	16.11	2.29	3.41	7.83													
	6	B4	8.50	0.12	13.33	1.02	3.70	3.77													
	7	B5	8.95	0.12	13.06	1.07	3.73	4.01													
	8	B6	53.31	0.14	22.22	7.69	2.93	22.55													
	9	B7	2.46	0.12	12.22	0.30	3.83	1.13													
	10	В8	9.52	0.12	13.33	1.14	3.70	4.22													
	11	C1	25.91	0.14	18.89	3.52	3.18	11.18													
	12	C2	17.03	0.17	23.28	2.82	2.86	8.08													
	13	C3	3.96	0.15	11.39	0.60	3.93	2.36													
	14	C4	6.37	0.12	13.33	0.76	3.70	2.83													
	15	C5	10.50	0.12	15.00	1.26	3.52	4.44													
	16	C6	21.29	0.17	17.22	3.70	3.31	12.27													
	17	D1	29.38	0.14	16.25	3.99	3.40	13.56													
	18	OS-A1	4.06	0.27	12.56	1.09	3.79	4.12													
	19	OS-A2	4.45	0.12	11.39	0.53	3.93	2.10													
	20	OS-C1	27.49	0.14	18.31	3.79	3.22	12.21													
	21	OS-C2	6.15	0.20	16.47	1.26	3.38	4.26													
	22	OS-C3	21.89	0.16	16.52	3.45	3.38	11.63													

Note: Rainfall intensity from Figure 6-5 IDF Equations

 $I_5 = -1.5 \ln(t_{c,min}) + 7.583$ 

## STANDARD FORM SF-3 STORM DRAINAGE DESIGN - RATIONAL METHOD 100 YEAR EVENT

PROJECT NAME: Overlook PROJECT NUMBER: 196239003 CALCULATED BY: GKS CHECKED BY: KRK PROPOSED CONDITIONS DATE: 8/7/2023

CHECKED B1.	CHECKED BY: KRK  DIRECT RUNOFF							T	OTAL I	RUNO	FF	STR	EET		PIPE			EL TI	ME	REMARKS	
STORM	DESIGN	DESIGN BASIN	AREA (AC)	RUNOFF COEFF	tc (min)	C*A(ac)	I (in/hr)	Q (cfs)	tc(max)	S(C*A) (ac)	I (in/hr)	Q (cfs)	SLOPE (%)	STREET FLOW(cfs	DESIGN FLOW(cfs )	SLOPE (%)	PIPE SIZE (in)	LENGTH (ft)	VELOCIT Y	tt (min)	
(1)	(2)	(3)	(4)	(5)	(6)	<b>(7)</b>	(8)	(9)	(10)	(11)	<b>(12)</b>	(13)	(14)	(15)	(16)	<b>(17)</b>	(18)	(19)	(20)	(21)	(22)
	1	A1	19.55	0.44	23.14	8.56	4.82	41.24													
	2	A2	58.27	0.42	34.44	24.36	3.82	92.96													
	3	B1	40.74	0.41	22.78	16.55	4.86	80.40													
	4	B2	16.00	0.40	14.44	6.43	6.01	38.64													
	5	В3	19.11	0.39	16.11	7.45	5.73	42.71													
	6	B4	8.50	0.39	13.33	3.32	6.21	20.58													
	7	B5	8.95	0.39	13.06	3.49	6.26	21.85													
	8	В6	53.31	0.41	22.22	21.74	4.92	106.95													
	9	В7	2.46	0.39	12.22	0.96	6.43	6.17													
	10	B8	9.52	0.39	13.33	3.71	6.21	23.05													
	11	C1	25.91	0.40	18.89	10.41	5.33	55.47													
	12	C2	17.03	0.42	23.28	7.21	4.80	34.64													
	13	C3	3.96	0.41	11.39	1.64	6.60	10.80													
	14	C4	6.37	0.39	13.33	2.48	6.21	15.42													
	15	C5	10.50	0.39	15.00	4.10	5.91	24.20													
	16	C6	21.29	0.43	17.22	9.14	5.56	50.85													
	17	D1	29.38	0.40	16.25	11.79	5.71	67.33													
	18	OS-A1	4.06	0.50	12.56	2.02	6.36	12.86													
	19	OS-A2	4.45	0.39	11.39	1.74	6.60	11.46													
	20	OS-C1	27.49	0.40	18.31	11.08	5.41	59.93													
	21	OS-C2	6.15	0.45	16.47	2.78	5.67	15.78													
	22	OS-C3	21.89	0.42	16.52	9.14	5.67	51.77													

Note: Rainfall intensity from Figure 6-5 IDF Equations

 $I_{100} = -2.52 \ln(t_{c,min}) + 12.735$ 



PROJECT NAME: Overlook 8/7/2023


PROJECT NUMBER: 196239003 CALCULATED BY: GKS CHECKED BY: KRK

CHECKED B1		SITIONIO DATIONIA	0410111	TIONIO	N 18 48 4 A F	N/
PRO		DITIONS RATIONAL	_ CALCULA		SUMMAR	(Υ
DESIGN POINT	TRIBUTARY	TRIBUTARY AREA		CFS		% IMPERVIOUS
DEGIGITI GIITI	BASINS	(AC)	Q2	Q5	Q100	70 IIVII EIVVIOOO
PDR Basins						
1	A1	19.55	5.41	10.41	41.24	15%
2	A2	58.27	9.71	20.99	92.96	12%
3	B1	40.74	6.97	16.77	80.40	10%
4	B2	16.00	3.10	7.82	38.64	9%
5	В3	19.11	2.61	7.83	42.71	7%
6	B4	8.50	1.25	3.77	20.58	7%
7	B5	8.95	1.33	4.01	21.85	7%
8	B6	53.31	9.52	22.55	106.95	10%
9	В7	2.46	0.38	1.13	6.17	7%
10	B8	9.52	1.41	4.22	23.05	7%
11	C1	25.91	4.42	11.18	55.47	9%
12	C2	17.03	3.87	8.08	34.64	12%
13	C3	3.96	1.04	2.36	10.80	11%
14	C4	6.37	0.94	2.83	15.42	7%
15	C5	10.50	1.48	4.44	24.20	7%
16	C6	21.29	6.09	12.27	50.85	13%
17	D1	29.38	5.34	13.56	67.33	9%
18	OS-A1	4.06	2.57	4.12	12.86	25%
19	OS-A2	4.45	0.70	2.10	11.46	7%
20	OS-C1	27.49	4.90	12.21	59.93	9%
21	OS-C2	6.15	2.35	4.26	15.78	17%
22	OS-C3	21.89	5.33	11.63	51.77	11%
ON-SITE BASIN TOT	'AL					
BASIN A TO	OTAL	77.82	15.12	31.40	134.20	12%
BASIN B TO	OTAL	158.59	26.57	68.09	340.34	8%
BASIN C TO	OTAL	85.06	17.84	41.15	191.38	10%
BASIN D TO	OTAL	29.38	4.90	12.21	59.93	9%
ON-SITE TO	OTAL	350.85	49.75	122.80	599.06	10%
OFF-SITE BASIN TO	TAL					
OFF-SITE BA	ASIN A	8.51	3.27	6.22	24.32	15%
OFF-SITE BA	ASIN C	55.53	12.58	28.11	127.48	11%
OFF-SITE T	OTAL	64.04	15.85	34.33	151.80	12%
SITE TO	ΓAL	414.89	65.60	157.13	750.86	10%

## **APPENDIX D: HYDRUALICS**



MHFD-Detention, Version 4.06 (July 2022)



Watershed Information Selected BMP Type = EDB why is an Watershed Area 2.87 override used? Watershed Length 1,000 rshed Length to Centroid Typical comment Watershed Slope = Vatershed Imperviousness = 100.00% percent Percentage Hydrologic Soil Group A = Percentage Hydrologic Soil Group B = 100.0%

Percentage Hydrologic Soil Groups C/D = 0.0% Target WQCV Drain Time = 40.0 hours **VOLUME USED** 

VOLUME USED

Location for 1-hr Rainfall Depths = Deriver - Capitol Building

IN POND SIZING

The Rainfall Depths = Deriver - Capitol Building

For providing required, inputs above including 1-hour rainfall

the, click "Run Cull" Designate runoff hydrographs using
the embedded Colorado International Company (International Company)

The embedded Colorado International Company (International Company (International Company (International Company (Internationa

the embedded Colorado Urban Uv	graph Procedu	re.
Water Quality Capture Volume (WQCV) =	0.120	acre-feet
Excess Urban Runoff Volume (EURV) =	0.324	acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	0.281	acre-feet
5-yr Runoff Volume (P1 = 1.5 in.) =	0.360	acre-feet
10-yr Runoff Volume (P1 = 1.75 in.) =	0.424	acre-feet
25-yr Runoff Volume (P1 = 2 in.) =	0.487	acre-feet
50-yr Runoff Volume (P1 = 2.25 in.) =	0.550	acre-feet
100-yr Runoff Volume (P1 = 2.52 in.) =	0.619	acre-feet
500-yr Runoff Volume (P1 = 3.14 in.) =	0.777	acre-feet
Approximate 2-yr Detention Volume =	0.263	acre-feet
Approximate 5-yr Detention Volume =	0.340	acre-feet
Approximate 10-yr Detention Volume =	0.412	acre-feet
Approximate 25-yr Detention Volume =	0.442	acre-feet
Approximate 50-yr Detention Volume =	0.458	acre-feet
Approximate 100-yr Detention Volume =	0.470	acre-feet

Option	nal Usei	Overrides
		acre-feet
		acre-feet
1.	.19	inches
1.	.50	inches
1.	.75	inches
2	.00	inches
2	.25	inches
2	.52	inches
		inches

Define	7ones	and	Racin	Geometry

Zone 1 Volume (WQCV) =	0.120	acre-feet
Zone 2 Volume (EURV - Zone 1) =	0.205	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	0.146	acre-feet
Total Detention Basin Volume =	0.470	acre-feet
Initial Surcharge Volume (ISV) =	16	ft <sup>3</sup>
Initial Surcharge Depth (ISD) =		ft
Total Available Detention Depth (H <sub>total</sub> ) =		ft
Depth of Trickle Channel (H <sub>TC</sub> ) =		ft
Slope of Trickle Channel (S <sub>TC</sub> ) =		ft/ft
Slopes of Main Basin Sides (Smain) =		H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =		
Initial Surcharge Area (A <sub>ISV</sub> ) =		ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =		ft
Surcharge Volume Width (W <sub>ISV</sub> ) =		ft
Donth of Pagin Floor (U ) -		e.


Ir	nitial Surcharge Area	$(A_{ISV}) =$	ft <sup>2</sup>
Surci	narge Volume Length	(L <sub>ISV</sub> ) =	ft
Surci	narge Volume Width (	W <sub>ISV</sub> ) =	ft
De	pth of Basin Floor (H <sub>I</sub>	LOOR) =	ft
Ler	ngth of Basin Floor (L	LOOR) =	ft
Wie	dth of Basin Floor (W <sub>I</sub>	LOOR) =	ft
A	rea of Basin Floor (A	LOOR) =	ft <sup>2</sup>
Volu	ıme of Basin Floor (V <sub>I</sub>	LOOR) =	ft 3
0	epth of Main Basin (F	H <sub>MAIN</sub> ) =	ft
L	ength of Main Basin (I	LMAIN) =	ft
V	/idth of Main Basin (V	$I_{MAIN}$ =	ft
	Area of Main Basin (A	(MAIN) =	ft <sup>2</sup>
Vo	lume of Main Basin (\	$I_{MAIN}$ =	ft 3
Calculated	Total Basin Volume (	V <sub>total</sub> ) =	acre-fee

Note that the full MHFD will be required during the Final Drainage Report and Final Design and a more detailed review with be conducted then

Depth Increment =		Optional Override Stage (ft)		146 ***	4.	Optional Override		Volume	
Stage - Storage Description	Stage (ft)	Override Stage (ft)	Length (ft)	Width (ft)	Area (ft 2)	Override Area (ft <sup>2</sup> )	Area (acre)	Volume (ft <sup>3</sup> )	Volume (ac-ft)
Top of Micropool		, , ,			, ,		. ,	X . /	, ,
									-
					_				
			-	-	-				

DETENTION BASIN STAGE-STORAGE TABLE BUILDER														
Destant	0	2 Deelles De	- d Ciri	MHFE	D-Detention, Version	n 4.06 (Ju	ıly 2022)							
,	Overlook A	2 Prelim Po	ind Sizing											
Basin ID:	100													
. / -2	2 ONE 1		_											
100-YR VOLUME EURV WQCV			_											
1 7000	LANDS	100-YE ORIFIC	AR E		Depth Increment =		ft							
PERMANENT Example Zone	1 AND 2 CES				Stage - Storage	Stage	Optional Override	Length	Width	Area	Optional Override	Area	Volume	Volume
Example 2011	e Comigura	ilion (Neter	illon Fond)		Description	(ft)	Stage (ft)	(ft)	(ft)	(ft 2)	Area (ft 2)	(acre)	(ft 3)	(ac-ft)
Watershed Information		_			Top of Micropool		0.00				23,106	0.530		
Selected BMP Type =	EDB						1.00				25,662	0.589	24,384	0.560
Watershed Area =	58.27	acres					2.00				28,319	0.650	51,375	1.179
Watershed Length = Watershed Length to Centroid =	3,500 1,750	ft					3.00 4.00				31,076 33,934	0.713	81,072 113,577	1.861 2.607
Watershed Englit to Certifold = Watershed Slope =	0.100	ft/ft	Steen Slop	e > 0.06 ft/	/ft		5.00				36,892	0.847	148,990	3.420
Watershed Imperviousness =	12.00%	percent												
Percentage Hydrologic Soil Group A =	0.0%	percent												
Percentage Hydrologic Soil Group B =	100.0%	percent												
Percentage Hydrologic Soil Groups C/D = Target WQCV Drain Time =	0.0% 40.0	percent												
Location for 1-hr Rainfall Depths =														
After providing required inputs above inc		-												
depths, click 'Run CUHP' to generate run	off hydrograph	ns using												
the embedded Colorado Urban Hydro		_	Optional Use	-										
Water Quality Capture Volume (WQCV) =	0.120	acre-feet	0.120	acre-feet										
Excess Urban Runoff Volume (EURV) = 2-yr Runoff Volume (P1 = 1.19 in.) =	0.667	acre-feet acre-feet	1.19	acre-feet inches										
5-yr Runoff Volume (P1 = 1.5 in.) =	1.836	acre-feet	1.50	inches										
10-yr Runoff Volume (P1 = 1.75 in.) =	2.787	acre-feet	1.75	inches										
25-yr Runoff Volume (P1 = 2 in.) =	4.448	acre-feet	2.00	inches				-						
50-yr Runoff Volume (P1 = 2.25 in.) =	5.593	acre-feet	2.25	inches										
100-yr Runoff Volume (P1 = 2.52 in.) = 500-yr Runoff Volume (P1 = 3.14 in.) =	7.228 10.226	acre-feet acre-feet	2.52	inches										
Approximate 2-yr Detention Volume =	0.434	acre-feet		IIICHES										
Approximate 5-yr Detention Volume =	0.670	acre-feet												
Approximate 10-yr Detention Volume =	1.290	acre-feet						-						
Approximate 25-yr Detention Volume =	1.747	acre-feet												
Approximate 50-yr Detention Volume = Approximate 100-yr Detention Volume =	1.835 2.346	acre-feet acre-feet												
Approximate 100-yr Determion Volume =	2.340	acre-reer												
Define Zones and Basin Geometry														
Zone 1 Volume (WQCV) =	0.120	acre-feet												
Zone 2 Volume (EURV - Zone 1) =	0.547	acre-feet												
Zone 3 Volume (100-year - Zones 1 & 2) = Total Detention Basin Volume =	1.679 2.346	acre-feet acre-feet												
Initial Surcharge Volume (ISV) =	user	ft 3												
Initial Surcharge Depth (ISD) =	user	ft						-						
Total Available Detention Depth (H <sub>total</sub> ) =	user	ft												
Depth of Trickle Channel $(H_{TC})$ =	user	ft												
Slope of Trickle Channel ( $S_{TC}$ ) = Slopes of Main Basin Sides ( $S_{main}$ ) =	user	ft/ft H:V												
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	user	n.v												
, , , , , , , , , , , , , , , , , , ,		-						-						
Initial Surcharge Area (A <sub>ISV</sub> ) =	user	ft <sup>2</sup>												
Surcharge Volume Length (L <sub>ISV</sub> ) =	user	ft												
Surcharge Volume Width $(W_{ISV})$ = Depth of Basin Floor $(H_{FLOOR})$ =	user	ft												
Length of Basin Floor (L <sub>FLOOR</sub> ) =	user	ft												
Width of Basin Floor (W <sub>FLOOR</sub> ) =	user	ft												
Area of Basin Floor $(A_{FLOOR})$ =	user	ft <sup>2</sup>						-						
Volume of Basin Floor (V <sub>FLOOR</sub> ) =	user	ft <sup>3</sup>												
Depth of Main Basin $(H_{MAIN}) =$ Length of Main Basin $(L_{MAIN}) =$	user	ft												
Width of Main Basin (W <sub>MAIN</sub> ) =	user	ft												
Area of Main Basin (A <sub>MAIN</sub> ) =	user	ft <sup>2</sup>												
Volume of Main Basin (V <sub>MAIN</sub> ) =	user	ft <sup>3</sup>												
Calculated Total Basin Volume ( $V_{total}$ ) =	user	acre-feet												
						-								
													$\vdash$	
						-								
														<del>                                     </del>

M#FD-Detention\_w4-06\_A2\_xtsm, Basin 8/2/2023, 1:11 PM

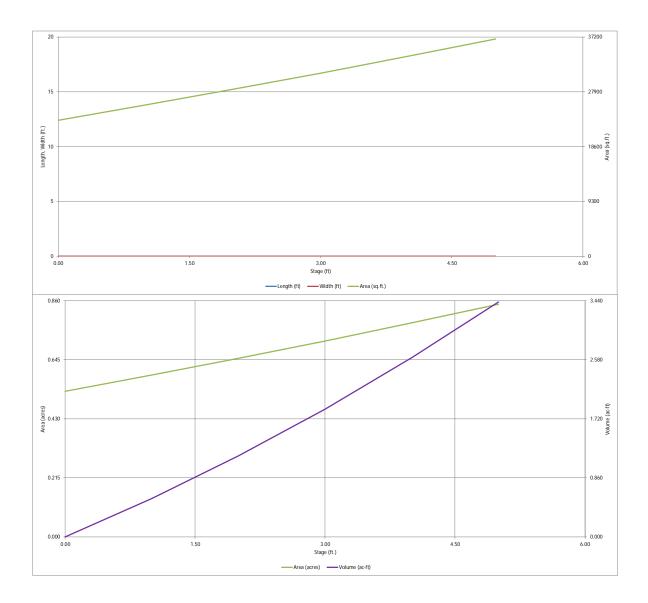

M#FD-Detention\_w4-06\_A2\_xtsm, Basin 8/2/2023, 1:11 PM


MHFD-Detention, Version 4.06 (July 2022)

Proje	ct: Overlook B	1 WQCV		IVINFD	-Detention, Versi	UII 4.UO (JL	IIy 2022)							
Basin I														
ZONE ZONE	ZONE 1		_											
100-YM EURV WOCY														
2	ONE 1 AND 2	ORIFIC	EAR CE		Depth Increment =		ft Optional	I		I	Optional			
	ne Configura	tion (Rete	ntion Pond)		Stage - Storage Description	Stage (ft)	Override Stage (ft)	Length (ft)	Width (ft)	Area (ft ²)	Override Area (ft ²)	Area (acre)	Volume (ft 3)	Volume (ac-ft)
Watershed Information					Top of Micropool	(11)	Stage (II)	(11)	(11)	(11)	Alea (It )	(acre)	(11 )	(ac-it)
Selected BMP Type														
Watershed Arez Watershed Length		acres												
Watershed Length to Centroic		ft												
Watershed Slope		ft/ft	Steep Slop	e > 0.06 ft/	ft									
Watershed Imperviousness Percentage Hydrologic Soll Group A		percent												
Percentage Hydrologic Soil Group E	= 100.0%	percent												
Percentage Hydrologic Soil Groups C/E  Target WOCV Drain Time		percent hours												-
VOLUME USED Location for 1-hr Rainfall Depths														
IN I DONID CIZINIO er providing required inputs above	including 1-hour	rainfall												
IN POND SIZING this, click 'Run CUHP' to generate the embedded Colorado Urban No	onorr nydrograpi graph Proced		Optional Use	r Overrides										
Water Quality Capture Volume (WQCV)		acre-feet		acre-feet										
Excess Urban Runoff Volume (EURV) 2-yr Runoff Volume (P1 = 1.19 in.)		acre-feet acre-feet	1.19	acre-feet inches										
5-yr Runoff Volume (P1 = 1.5 in.)	-	acre-feet	1.50	inches										
10-yr Runoff Volume (P1 = 1.75 in.) 25-yr Runoff Volume (P1 = 2 in.)		acre-feet	1.75 2.00	inches										
25-yr Runoff Volume (P1 = 2 In.) 50-yr Runoff Volume (P1 = $2.25$ in.)		acre-feet acre-feet	2.00	inches inches										
100-yr Runoff Volume (P1 = 2.52 in.)	-	acre-feet	2.52	inches										
500-yr Runoff Volume (P1 = 3.14 in.) Approximate 2-yr Detention Volume		acre-feet acre-feet		inches										
Approximate 5-yr Detention Volume	-	acre-feet												
Approximate 10-yr Detention Volume Approximate 25-yr Detention Volume		acre-feet acre-feet												
Approximate 50-yr Detention Volume	-	acre-reet acre-feet												
Approximate 100-yr Detention Volume	-	acre-feet												
Define Zones and Basin Geometry														<b> </b>
Select Zone 1 Storage Volume (Required)		acre-feet												
Select Zone 2 Storage Volume (Optional) Select Zone 3 Storage Volume (Optional)		acre-feet acre-feet												<b> </b>
Total Detention Basin Volume		acre-feet												
Initial Surcharge Volume (ISV) Initial Surcharge Depth (ISD)		ft <sup>3</sup>												<b></b>
Total Available Detention Depth (H <sub>total</sub>	-	ft												
Depth of Trickle Channel ( $H_{\text{TC}}$ ). Slope of Trickle Channel ( $S_{\text{TC}}$ )		ft ft/ft												
Slopes of Main Basin Sides (S <sub>main</sub>		H:V												
Basin Length-to-Width Ratio (R <sub>L/W</sub> )	=													
Initial Surcharge Area (A <sub>ISV</sub> )	=	ft <sup>2</sup>												
Surcharge Volume Length (L <sub>ISV</sub> )	=	ft												
Surcharge Volume Width ( $W_{\rm ISV}$ )  Depth of Basin Floor ( $H_{\rm FLOOR}$ )	_	ft												<b> </b>
Length of Basin Floor (L <sub>FLOOR</sub> )	=	ft												
Width of Basin Floor (W <sub>FLOOR</sub> ) Area of Basin Floor (A <sub>FLOOR</sub> )	=	ft ft <sup>2</sup>												-
Volume of Basin Floor (V <sub>FLOOR</sub> )	=	ft <sup>3</sup>												
Depth of Main Basin (H <sub>MAIN</sub> )	=	ft												
Length of Main Basin (L <sub>MAIN</sub> ) Width of Main Basin (W <sub>MAIN</sub> )		ft												
Area of Main Basin (A <sub>MAIN</sub> )	=	ft <sup>2</sup>												
Volume of Main Basin (V <sub>MAIN</sub> ) Calculated Total Basin Volume (V <sub>Iotal</sub> )	=	ft 3 acre-feet												
						1								

MHFD-Detention\_v4-06\_B1\_WQCV.xtern, Basin

7/18/2023, 11:24 AM

MHFD-Detention, Version 4.06 (July 2022)



Project: Overlook B1 Prelim Pond Sizing

Watershed Information

100-YR	ZONE 3 ZONE 2 ZONE 1	
VOLUME EURY WOCV		
PERMANENT-	ZONE 1 AND 2 ORIFICES	100-YEAR ORIFICE
POOL	Example Zone Configura	ation (Retention Pond)

tersifed information		
Selected BMP Type =	EDB	
Watershed Area =	40.74	acres
Watershed Length =	3,000	ft
Watershed Length to Centroid =	1,500	ft
Watershed Slope =	0.045	ft/ft
Watershed Imperviousness =	10.00%	percent
Percentage Hydrologic Soil Group A =	0.0%	percent
Percentage Hydrologic Soil Group B =	100.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1 br Dainfall Donths	Donuer Capit	ol Building

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

the embedded Colorado Urban Hydro	graph Procedu	re.
Water Quality Capture Volume (WQCV) =	0.048	acre-feet
Excess Urban Runoff Volume (EURV) =	0.383	acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	0.544	acre-feet
5-yr Runoff Volume (P1 = 1.5 in.) =	1.202	acre-feet
10-yr Runoff Volume (P1 = 1.75 in.) =	1.858	acre-feet
25-yr Runoff Volume (P1 = 2 in.) =	3.027	acre-feet
50-yr Runoff Volume (P1 = 2.25 in.) =	3.825	acre-feet
100-yr Runoff Volume (P1 = 2.52 in.) =	4.973	acre-feet
500-yr Runoff Volume (P1 = 3.14 in.) =	7.066	acre-feet
Approximate 2-yr Detention Volume =	0.244	acre-feet
Approximate 5-yr Detention Volume =	0.383	acre-feet
Approximate 10-yr Detention Volume =	0.796	acre-feet
Approximate 25-yr Detention Volume =	1.112	acre-feet
Approximate 50-yr Detention Volume =	1.163	acre-feet
Approximate 100-yr Detention Volume =	1.503	acre-feet
		-

Optional User Overrides					
acre-feet					
acre-feet					
inches					


Define Zones and Basin Geometry

Zone 1 Volume (WQCV) =	0.048	acre-fee
Zone 2 Volume (EURV - Zone 1) =	0.335	acre-fee
Zone 3 Volume (100-year - Zones 1 & 2) =	1.120	acre-fee
Total Detention Basin Volume =	1.503	acre-fee
Initial Surcharge Volume (ISV) =	user	ft <sup>3</sup>
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H <sub>total</sub> ) =	user	ft
Depth of Trickle Channel (H <sub>TC</sub> ) =	user	ft
Slope of Trickle Channel (S <sub>TC</sub> ) =	user	ft/ft
Slopes of Main Basin Sides (Smain) =	user	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	user	

Initial Surcharge Area (A <sub>ISV</sub> ) =	user	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	user	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	user	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	user	ft
Length of Basin Floor (LFLOOR) =	user	ft
Width of Basin Floor ( $W_{FLOOR}$ ) =	user	ft
Area of Basin Floor $(A_{FLOOR})$ =		ft <sup>2</sup>
Volume of Basin Floor $(V_{FLOOR}) =$	user	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	user	ft
Length of Main Basin $(L_{MAIN}) =$	user	ft
Width of Main Basin ( $W_{MAIN}$ ) =	user	ft
Area of Main Basin (A <sub>MAIN</sub> ) =		ft <sup>2</sup>
Volume of Main Basin (V <sub>MAIN</sub> ) =	user	ft <sup>3</sup>
Calculated Total Basin Volume ( $V_{total}$ ) =	user	acre-feet


Г		1							
Depth Increment =		ft Optional				Optional			
Stage - Storage Description	Stage (ft)	Override Stage (ft)	Length (ft)	Width (ft)	Area (ft 2)	Override Area (ft <sup>2</sup> )	Area (acre)	Volume (ft 3)	Volume (ac-ft)
Top of Micropool		0.00				14,485	0.333		
		1.00				16,343	0.375	15,414	0.354
		2.00				18,301	0.420	32,736	0.752
		3.00 4.00				20,359 22,519	0.467 0.517	52,066 73,505	1.195
		5.00				24,778	0.569	97,153	2.230

MHFD-Detention\_v4-06\_B1.xlsm, Basin 8/2/2023, 1:27 PM

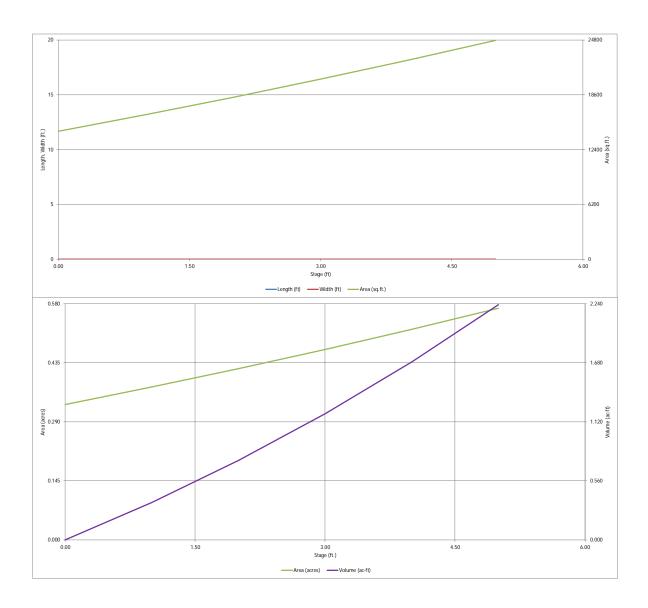


M#FD-Detention\_w4-06\_B1.xksm, Basin 8/2/2023, 1:27 PM

MHFD-Detention, Version 4.06 (July 2022)

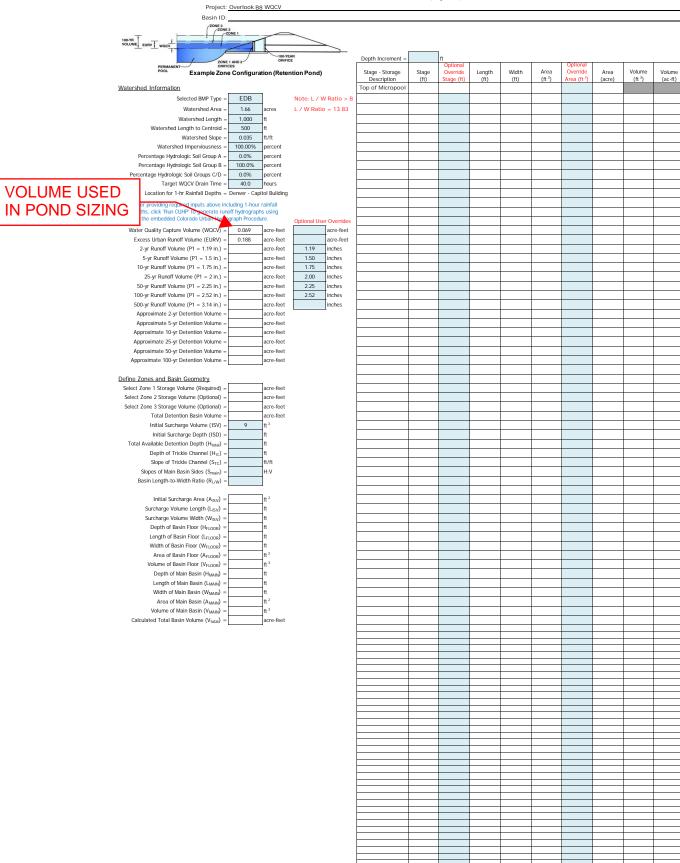

MHFD-Detention\_v4-06\_B3\_WOCV.xism, Basin 7/18/2023, 11:32 AM

MHFD-Detention, Version 4.06 (July 2022)



#### Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	62.83	acres
Watershed Length =	4,000	ft
Watershed Length to Centroid =	2,000	ft
Watershed Slope =	0.050	ft/ft
Watershed Imperviousness =	9.00%	percent
Percentage Hydrologic Soil Group A =	0.0%	percent
Percentage Hydrologic Soil Group B =	100.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1-hr Rainfall Depths =	Denver - Capit	ol Building

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using

the embedded Colorado Urban Hydro	graph Procedu	re.
Water Quality Capture Volume (WQCV) =	0.069	acre-feet
Excess Urban Runoff Volume (EURV) =	0.527	acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	0.793	acre-feet
5-yr Runoff Volume (P1 = 1.5 in.) =	1.795	acre-feet
10-yr Runoff Volume (P1 = 1.75 in.) =	2.801	acre-feet
25-yr Runoff Volume (P1 = 2 in.) =	4.614	acre-feet
50-yr Runoff Volume (P1 = 2.25 in.) =	5.843	acre-feet
100-yr Runoff Volume (P1 = 2.52 in.) =	7.619	acre-feet
500-yr Runoff Volume (P1 = 3.14 in.) =	10.846	acre-feet
Approximate 2-yr Detention Volume =	0.333	acre-feet
Approximate 5-yr Detention Volume =	0.527	acre-feet
Approximate 10-yr Detention Volume =	1.146	acre-feet
Approximate 25-yr Detention Volume =	1.628	acre-feet
Approximate 50-yr Detention Volume =	1.697	acre-feet
Approximate 100-yr Detention Volume =	2.207	acre-feet

Optional User Overrides					
0.069	acre-feet				
	acre-feet				
1.19	inches				
1.50	inches				
1.75	inches				
2.00	inches				
2.25	inches				
2.52	inches				
	inches				


#### Define Zones and Basin Geometry

Jenne Zones and Basin Geometry		
Zone 1 Volume (WQCV) =	0.069	acre-fee
Zone 2 Volume (EURV - Zone 1) =	0.458	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	1.680	acre-feet
Total Detention Basin Volume =	2.207	acre-feet
Initial Surcharge Volume (ISV) =	user	ft <sup>3</sup>
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H <sub>total</sub> ) =	user	ft
Depth of Trickle Channel (H <sub>TC</sub> ) =	user	ft
Slope of Trickle Channel (S <sub>TC</sub> ) =	user	ft/ft
Slopes of Main Basin Sides (Smain) =	user	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	user	

Initial Surcharge Area (A <sub>ISV</sub> ) =	user	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	user	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	user	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	user	ft
Length of Basin Floor (LFLOOR) =	user	ft
Width of Basin Floor ( $W_{FLOOR}$ ) =		ft
Area of Basin Floor $(A_{FLOOR})$ =		ft <sup>2</sup>
Volume of Basin Floor $(V_{FLOOR}) =$	user	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	user	ft
Length of Main Basin $(L_{MAIN}) =$	user	ft
Width of Main Basin (W <sub>MAIN</sub> ) =	user	ft
Area of Main Basin (A <sub>MAIN</sub> ) =		ft <sup>2</sup>
Volume of Main Basin (V <sub>MAIN</sub> ) =	user	ft <sup>3</sup>
Calculated Total Basin Volume (V <sub>total</sub> ) =	user	acre-feet

Depth Increment =		ft							
Stage - Storage	Stage	Optional Override	Length	Width	Area	Optional Override	Area	Volume	Volume
Description	(ft)	Stage (ft)	(ft)	(ft)	(ft 2)	Area (ft 2)	(acre)	(ft 3)	(ac-ft)
Top of Micropool		0.00				13,730	0.315	45 570	0.050
		1.00	-			17,427	0.400	15,578	0.358
		2.00 3.00				21,230 25,133	0.487	34,907 58,088	0.801
		4.00				29,138	0.669	85,224	1.956
		5.00				33,243	0.763	116,414	2.673
		6.00				37,448	0.860	151,759	3.484
			-						
			-						
			-						
								-	-
									-
			-						,
	1		1						
	1		1						
	-		-						
			-						
	1		1 1						
			-						
			-						
			-						
	-		-						
									-
			-						
			-						
						1			


M#FD-Detention\_v4-06\_88.xkm, Basin 8/7/2023, 4:03 PM

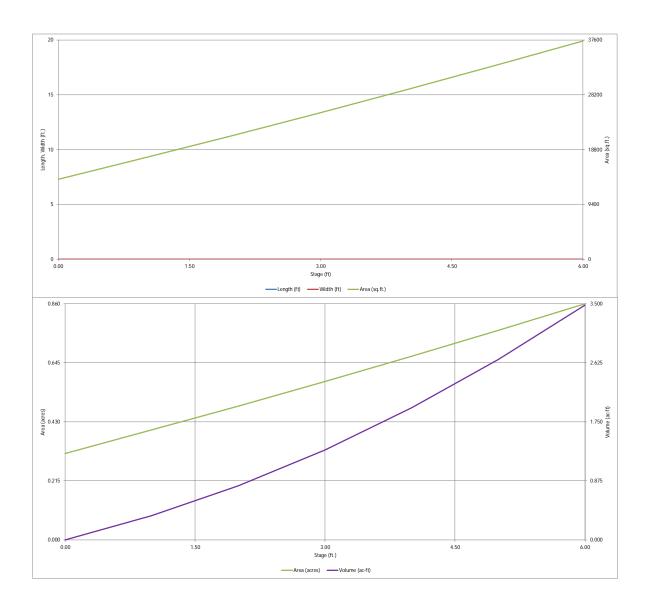

M#FD-Detention\_w4-06\_B8.xksm, Basin 8/7/2023, 4:03 PM

MHFD-Detention, Version 4.06 (July 2022)

acre-feet inches inches inches inches inches inches inches



Example Zone Configuration (Retention Pond)

#### Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	1.00	acres
Watershed Length =	500	ft
Watershed Length to Centroid =	250	ft
Watershed Slope =	0.040	ft/ft
Watershed Imperviousness =	100.00%	percent
Percentage Hydrologic Soil Group A =	0.0%	percent
Percentage Hydrologic Soil Group B =	100.0%	percent
centage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours

VOLUME USED | larget Would virain I Impe = | 40.0 | | Industry | Location for 1-hr Rainfall Depths = Denver - Capitol Building

IN POND SIZING

or providing regions inputs above including 1-hour rainfall inst, click "Run CUIP" to speciate under hybridgraphs using the earth-defed college of the best when many beganders.

the embedded Colorado Urban Hy	graph Procedu	re.	Optio
Water Quality Capture Volume (WQCV) =	0.042	acre-feet	
Excess Urban Runoff Volume (EURV) =	0.113	acre-feet	
2-yr Runoff Volume (P1 = 0.83 in.) =		acre-feet	
5-yr Runoff Volume (P1 = 1.09 in.) =		acre-feet	
10-yr Runoff Volume (P1 = 1.33 in.) =		acre-feet	
25-yr Runoff Volume (P1 = 1.69 in.) =		acre-feet	
50-yr Runoff Volume (P1 = 1.99 in.) =		acre-feet	
100-yr Runoff Volume (P1 = 2.31 in.) =		acre-feet	
500-yr Runoff Volume (P1 = 3.14 in.) =		acre-feet	
Approximate 2-yr Detention Volume =		acre-feet	
Approximate 5-yr Detention Volume =		acre-feet	
Approximate 10-yr Detention Volume =		acre-feet	
Approximate 25-yr Detention Volume =		acre-feet	
Approximate 50-yr Detention Volume =		acre-feet	
Approximate 100-yr Detention Volume =		acre-feet	

Define	Zones	and	Basin	Geometry


acre-fe		Select Zone 1 Storage Volume (Required) =
acre-fe		Select Zone 2 Storage Volume (Optional) =
acre-fe		Select Zone 3 Storage Volume (Optional) =
acre-fe		Total Detention Basin Volume =
ft <sup>3</sup>	5	Initial Surcharge Volume (ISV) =
ft		Initial Surcharge Depth (ISD) =
ft		Total Available Detention Depth (H <sub>total</sub> ) =
ft		Depth of Trickle Channel (H <sub>TC</sub> ) =
ft/ft		Slope of Trickle Channel (S <sub>TC</sub> ) =
H:V		Slopes of Main Basin Sides (Smain) =
1		Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =

Slopes of Main Basin Sides (Smain) =	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	
Initial Surcharge Area (A <sub>ISV</sub> ) =	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	ft
Length of Basin Floor $(L_{FLOOR})$ =	ft
Width of Basin Floor $(W_{FLOOR}) =$	ft
Area of Basin Floor (A <sub>FLOOR</sub> ) =	ft <sup>2</sup>
Volume of Basin Floor $(V_{FLOOR}) =$	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	ft
Length of Main Basin (L <sub>MAIN</sub> ) =	ft
Width of Main Basin (W <sub>MAIN</sub> ) =	ft
Area of Main Basin (A <sub>MAIN</sub> ) =	ft 2
Volume of Main Basin (V <sub>MAIN</sub> ) =	ft <sup>3</sup>
Calculated Total Basin Volume ( $V_{total}$ ) =	acre-fe

			1							
	Depth Increment =		ft Optional Override				Optional			
	Stage - Storage Description	Stage (ft)	Override Stage (ft)	Length (ft)	Width (ft)	Area (ft ²)	Override Area (ft <sup>2</sup> )	Area (acre)	Volume (ft 3)	Volume (ac-ft)
	Top of Micropool									
5										
	-									

MHFD-Detention\_v4-06\_C2\_WQCV.xlsm, Basin 7/18/2023, 1:01 PM

MHFD-Detention, Version 4.06 (July 2022)



#### Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	17.03	acres
Watershed Length =	1,500	ft
Watershed Length to Centroid =	750	ft
Watershed Slope =	0.050	ft/ft
Watershed Imperviousness =	12.00%	percent
Percentage Hydrologic Soil Group A =	0.0%	percent
Percentage Hydrologic Soil Group B =	100.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1-hr Rainfall Depths =	Denver - Capit	ol Building

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using

the embedded Colorado Urban Hydrograph Procedure.						
Water Quality Capture Volume (WQCV) =	0.042	acre-feet				
Excess Urban Runoff Volume (EURV) =	0.195	acre-feet				
2-yr Runoff Volume (P1 = 1.19 in.) =	0.255	acre-feet				
5-yr Runoff Volume (P1 = 1.5 in.) =	0.536	acre-feet				
10-yr Runoff Volume (P1 = 1.75 in.) =	0.813	acre-feet				
25-yr Runoff Volume (P1 = 2 in.) =	1.298	acre-feet				
50-yr Runoff Volume (P1 = 2.25 in.) =	1.632	acre-feet				
100-yr Runoff Volume (P1 = 2.52 in.) =	2.109	acre-feet				
500-yr Runoff Volume (P1 = 3.14 in.) =	2.983	acre-feet				
Approximate 2-yr Detention Volume =	0.127	acre-feet				
Approximate 5-yr Detention Volume =	0.196	acre-feet				
Approximate 10-yr Detention Volume =	0.377	acre-feet				
Approximate 25-yr Detention Volume =	0.511	acre-feet				
Approximate 50-yr Detention Volume =	0.536	acre-feet				
Approximate 100-yr Detention Volume =	0.686	acre-feet				

Optional User	Overrides
0.042	acre-feet
	acre-feet
1.19	inches
1.50	inches
1.75	inches
2.00	inches
2.25	inches
2.52	inches
	inches


#### Define Zones and Basin Geometry

efine Zones and Basin Geometry		
Zone 1 Volume (WQCV) =	0.042	acre-fe
Zone 2 Volume (EURV - Zone 1) =	0.153	acre-fe
Zone 3 Volume (100-year - Zones 1 & 2) =	0.491	acre-fe
Total Detention Basin Volume =	0.686	acre-fe
Initial Surcharge Volume (ISV) =	user	ft <sup>3</sup>
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H <sub>total</sub> ) =	user	ft
Depth of Trickle Channel (H <sub>TC</sub> ) =	user	ft
Slope of Trickle Channel (S <sub>TC</sub> ) =	user	ft/ft
Slopes of Main Basin Sides (Smain) =	user	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	user	

Initial Surcharge Area (A <sub>ISV</sub> ) =	user	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	user	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	user	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	user	ft
Length of Basin Floor (LFLOOR) =	user	ft
Width of Basin Floor ( $W_{FLOOR}$ ) =		ft
Area of Basin Floor $(A_{FLOOR})$ =		ft <sup>2</sup>
Volume of Basin Floor $(V_{FLOOR}) =$	user	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	user	ft
Length of Main Basin $(L_{MAIN}) =$	user	ft
Width of Main Basin (W <sub>MAIN</sub> ) =	user	ft
Area of Main Basin (A <sub>MAIN</sub> ) =		ft <sup>2</sup>
Volume of Main Basin (V <sub>MAIN</sub> ) =	user	ft <sup>3</sup>
Calculated Total Basin Volume (V <sub>total</sub> ) =	user	acre-feet

		1							
Depth Increment =		ft Optional			I	Optional		I	
Stage - Storage Description	Stage (ft)	Override Stage (ft)	Length (ft)	Width (ft)	Area (ft 2)	Override Area (ft <sup>2</sup> )	Area (acre)	Volume (ft 3)	Volume (ac-ft)
Top of Micropool		0.00				3,926	0.090	, , , ,	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
		1.00				4,963	0.114	4,445	0.102
		2.00				6,101	0.140	9,976	0.229
		3.00 4.00				7,339 8,677	0.168	16,696 24,704	0.383 0.567
		5.00				10,117	0.232	34,101	0.783
		6.00				11,656	0.268	44,987	1.033
			-						
	-		-						
	**								
			-						
	-		-						
	-		-						
			1						
			-						
	-		-						
			-						
			-						
	-		-						
			1 1						
	1 1		1 1						
	-								
	-		-						
			-						
			1 1				_		


MHFD-Detention\_v4-06\_C2.xlsm, Basin 8/1/2023, 12:32 PM

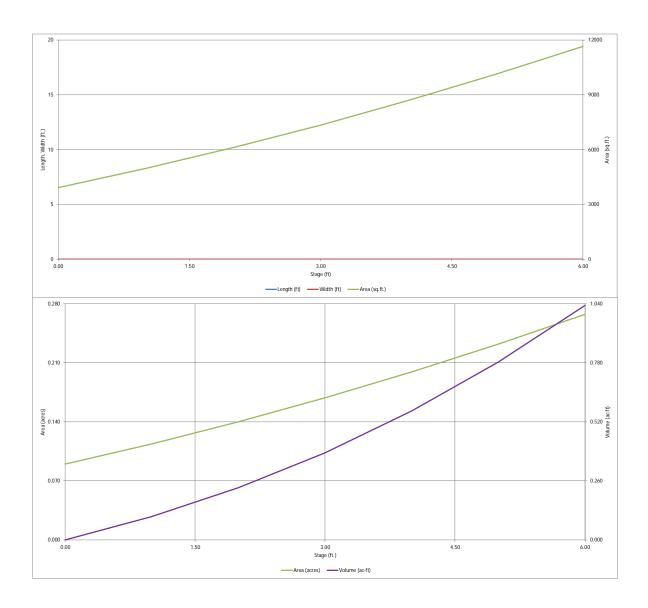

M#FD-Detention\_w4-06\_C2.xkm, Basin

MHFD-Detention, Version 4.06 (July 2022)

acre-feet
acre-feet
inches
inches
inches
inches
inches
inches
inches
inches



#### Watershed Information

	Selected BMP Type =	EDB	
	Watershed Area =	1.47	acres
	Watershed Length =	700	ft
	Watershed Length to Centroid =	350	ft
	Watershed Slope =	0.035	ft/ft
	Watershed Imperviousness =	100.00%	percent
F	Percentage Hydrologic Soil Group A =	0.0%	percent
1	Percentage Hydrologic Soil Group B =	100.0%	percent
erc	entage Hydrologic Soil Groups C/D =	0.0%	percent
	Target WQCV Drain Time =	40.0	hours
	Location for 1-hr Rainfall Depths =	Denver - Capit	ol Building

# VOLUME USED IN POND SIZING

providing required inputs above including 1-hour rainfall s, click 'Run CUHP' to generate runoff hydrographs using e embedded Colorado Urban Lydragraph Procedure.

the embedded Colorado Urban	graph Procedu	re.	(
Water Quality Capture Volume (WQCV) =	0.061	acre-feet	
Excess Urban Runoff Volume (EURV) =	0.166	acre-feet	
2-yr Runoff Volume (P1 = 0.83 in.) =		acre-feet	
5-yr Runoff Volume (P1 = 1.09 in.) =		acre-feet	
10-yr Runoff Volume (P1 = 1.33 in.) =		acre-feet	
25-yr Runoff Volume (P1 = 1.69 in.) =		acre-feet	
50-yr Runoff Volume (P1 = 1.99 in.) =		acre-feet	
100-yr Runoff Volume (P1 = 2.31 in.) =		acre-feet	
500-yr Runoff Volume (P1 = 3.14 in.) =		acre-feet	
Approximate 2-yr Detention Volume =		acre-feet	
Approximate 5-yr Detention Volume =		acre-feet	
Approximate 10-yr Detention Volume =		acre-feet	
Approximate 25-yr Detention Volume =		acre-feet	
Approximate 50-yr Detention Volume =		acre-feet	
Approximate 100-yr Detention Volume =		acre-feet	

#### Define Zones and Basin Geometry


acre-fee		Select Zone 1 Storage Volume (Required) =
acre-fee		Select Zone 2 Storage Volume (Optional) =
acre-fee		Select Zone 3 Storage Volume (Optional) =
acre-fee		Total Detention Basin Volume =
ft <sup>3</sup>	8	Initial Surcharge Volume (ISV) =
ft		Initial Surcharge Depth (ISD) =
ft		Total Available Detention Depth (H <sub>total</sub> ) =
ft		Depth of Trickle Channel (H <sub>TC</sub> ) =
ft/ft		Slope of Trickle Channel (S <sub>TC</sub> ) =
H:V		Slopes of Main Basin Sides (Smain) =
1		Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =

Slopes of Main Basin Sides (Smain) =	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	
Initial Surcharge Area (A <sub>ISV</sub> ) =	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	ft
Length of Basin Floor $(L_{FLOOR})$ =	ft
Width of Basin Floor (WFLOOR) =	ft
Area of Basin Floor (A <sub>FLOOR</sub> ) =	ft <sup>2</sup>
Volume of Basin Floor $(V_{FLOOR}) =$	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	ft
Length of Main Basin (L <sub>MAIN</sub> ) =	ft
Width of Main Basin (W <sub>MAIN</sub> ) =	ft
Area of Main Basin (A <sub>MAIN</sub> ) =	ft <sup>2</sup>
Volume of Main Basin (V <sub>MAIN</sub> ) =	ft <sup>3</sup>
Calculated Total Basin Volume ( $V_{total}$ ) =	acre-fee

Depth Increment =		ft							
	Stage	Optional Override	Length	Width	Area	Optional Override	Area	Volume	Volume
Stage - Storage Description	(ft)	Stage (ft)	Length (ft)	(ft)	(ft 2)	Area (ft 2)	(acre)	(ft 3)	(ac-ft)
Top of Micropool									
-									
-									

M#FD-Detention\_w4-06\_C6\_WQCV.xism, Basin 7/18/2023, 1:09 PM

MHFD-Detention, Version 4.06 (July 2022)



Project: Overlook C6 Preliminary Pond Sizing

Watershed Information

ZONE 3
100-YR VOLUME EURY WOOL
ZONE 1 AND 2 ORIFICE  PERMANENT ORIFICES
Example Zone Configuration (Retention Pond)

ersiled irriormation		
Selected BMP Type =	EDB	
Watershed Area =	21.29	acres
Watershed Length =	1,500	ft
Watershed Length to Centroid =	750	ft
Watershed Slope =	0.050	ft/ft
Watershed Imperviousness =	13.00%	percent
Percentage Hydrologic Soil Group A =	0.0%	percent
Percentage Hydrologic Soil Group B =	100.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Landing for 1 by Delegal Dentha	Donuer Capit	ol Building

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

the embedded Colorado Urban Hydrograph Procedure.					
Water Quality Capture Volume (WQCV) =	0.061	acre-feet			
Excess Urban Runoff Volume (EURV) =	0.266	acre-feet			
2-yr Runoff Volume (P1 = 1.19 in.) =	0.336	acre-feet			
5-yr Runoff Volume (P1 = 1.5 in.) =	0.691	acre-feet			
10-yr Runoff Volume (P1 = 1.75 in.) =	1.040	acre-feet			
25-yr Runoff Volume (P1 = 2 in.) =	1.643	acre-feet			
50-yr Runoff Volume (P1 = 2.25 in.) =	2.061	acre-feet			
100-yr Runoff Volume (P1 = 2.52 in.) =	2.656	acre-feet			
500-yr Runoff Volume (P1 = 3.14 in.) =	3.750	acre-feet			
Approximate 2-yr Detention Volume =	0.174	acre-feet			
Approximate 5-yr Detention Volume =	0.267	acre-feet			
Approximate 10-yr Detention Volume =	0.499	acre-feet			
Approximate 25-yr Detention Volume =	0.666	acre-feet			
Approximate 50-yr Detention Volume =	0.701	acre-feet			
Approximate 100-yr Detention Volume =	0.891	acre-feet			
		-			

Optional User Overrides						
0.061	acre-feet					
	acre-feet					
1.19	inches					
1.50	inches					
1.75	inches					
2.00	inches					
2.25	inches					
2.52	inches					
	inches					


Define Zones and Basin Geometry

Zone 1 Volume (WQCV) =	0.061	acre-fe
Zone 2 Volume (EURV - Zone 1) =	0.205	acre-fe
Zone 3 Volume (100-year - Zones 1 & 2) =	0.626	acre-fe
Total Detention Basin Volume =	0.891	acre-fe
Initial Surcharge Volume (ISV) =	user	ft <sup>3</sup>
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H <sub>total</sub> ) =	user	ft
Depth of Trickle Channel (H <sub>TC</sub> ) =	user	ft
Slope of Trickle Channel (S <sub>TC</sub> ) =	user	ft/ft
Slopes of Main Basin Sides (Smain) =	user	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	user	

Initial Surcharge Area (A <sub>ISV</sub> ) =	user	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	user	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	user	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	user	ft
Length of Basin Floor (LFLOOR) =	user	ft
Width of Basin Floor (W <sub>FLOOR</sub> ) =		ft
Area of Basin Floor (A <sub>FLOOR</sub> ) =		ft <sup>2</sup>
Volume of Basin Floor (V <sub>FLOOR</sub> ) =	user	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	user	ft
Length of Main Basin $(L_{MAIN})$ =	user	ft
Width of Main Basin $(W_{MAIN}) =$		ft
Area of Main Basin (A <sub>MAIN</sub> ) =		ft <sup>2</sup>
Volume of Main Basin (V <sub>MAIN</sub> ) =	user	ft <sup>3</sup>
Calculated Total Basin Volume (V <sub>total</sub> ) =	user	acre-feet

Depth Increment =		ft							
Stage - Storage	Stage	Optional Override	Length	Width	Area	Optional Override	Area	Volume	Volume
Description	(ft)	Stage (ft)	(ft)	(ft)	(ft 2)	Area (ft 2)	(acre)	(ft 3)	(ac-ft)
Top of Micropool		0.00				7,166	0.165	0.200	0.100
		1.00	-			9,278	0.213	8,222	0.189
		2.00 3.00				11,491 13,804	0.264	18,607 31,254	0.427
		4.00				16,218	0.372	46,265	1.062
		5.00				18,732	0.430	63,740	1.463
			-						
			-						
							-		-
			-						,
	1		1						
	1		1						
			1						
			-						
	-		-						
			-						
			-						
			1 1						
			-						
							-		-
	-								
			-						
	-		1 1						
			-						
							l	l	

MHFD-Detention\_v4-06\_C6.xlsm, Basin 8/1/2023, 11:11 AM

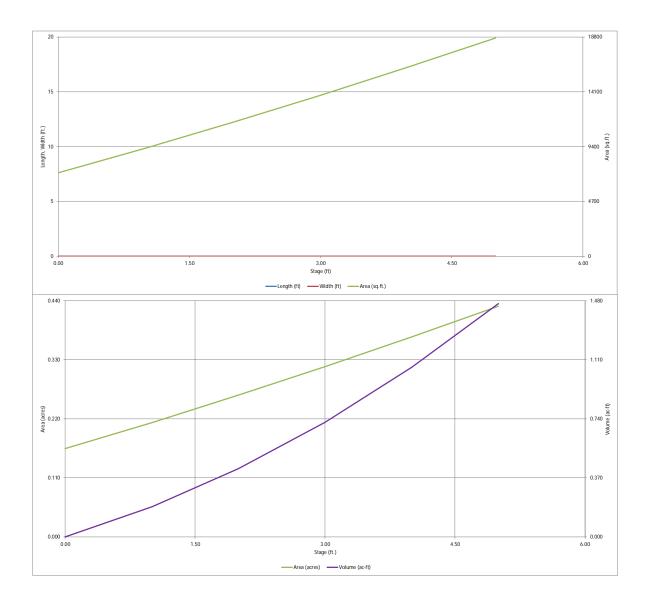

M#FD-Detention\_w4-06\_C6.xism, Basin

MHFD-Detention, Version 4.06 (July 2022)

acre-feet acre-feet inches inches inches inches inches inches

	Basin ID:	
100-YR EURY WQCV	ZONE 3 ZONE 2 ZONE 1	
PERMANENT	ZONE 1 AND 2 ORIFICES  Example Zone Configur	orifice ation (Retention Pond)

Project: Overlook D1 WQCV

#### Watershed Information

	Selected BMP Type =	EDB	
	Watershed Area =	0.59	acres
	Watershed Length =	400	ft
	Watershed Length to Centroid =	200	ft
	Watershed Slope =	0.040	ft/ft
	Watershed Imperviousness =	100.00%	percent
F	Percentage Hydrologic Soil Group A =	0.0%	percent
1	Percentage Hydrologic Soil Group B =	100.0%	percent
erc	entage Hydrologic Soil Groups C/D =	0.0%	percent
	Target WQCV Drain Time =	40.0	hours
	Location for 1-hr Rainfall Depths =	Denver - Capit	ol Building

# VOLUME USED

IN POND SIZING

Is providing request inputs above including 1-hour rainfall the, click Plus Cultiff the generate runoff hydrographs using the earth-defed colorated, in the sharp the provider of the colorated colorated in the co

the embedded Colorado Urban Uw	graph Procedu	re.	(
Water Quality Capture Volume (WQCV) =	0.025	acre-feet	
Excess Urban Runoff Volume (EURV) =	0.067	acre-feet	
2-yr Runoff Volume (P1 = 0.83 in.) =		acre-feet	
5-yr Runoff Volume (P1 = 1.09 in.) =		acre-feet	
10-yr Runoff Volume (P1 = 1.33 in.) =		acre-feet	
25-yr Runoff Volume (P1 = 1.69 in.) =		acre-feet	
50-yr Runoff Volume (P1 = 1.99 in.) =		acre-feet	
100-yr Runoff Volume (P1 = 2.31 in.) =		acre-feet	
500-yr Runoff Volume (P1 = 3.14 in.) =		acre-feet	
Approximate 2-yr Detention Volume =		acre-feet	
Approximate 5-yr Detention Volume =		acre-feet	
Approximate 10-yr Detention Volume =		acre-feet	
Approximate 25-yr Detention Volume =		acre-feet	
Approximate 50-yr Detention Volume =		acre-feet	
Approximate 100-yr Detention Volume =		acre-feet	

#### Define Zones and Basin Geometry

Select Zone 1 Storage Volume (Required) =
Select Zone 2 Storage Volume (Optional) =
Select Zone 3 Storage Volume (Optional) =
Total Detention Basin Volume =
Initial Surcharge Volume (ISV) =
Initial Surcharge Depth (ISD) =
Total Available Detention Depth (H <sub>total</sub> ) =
Depth of Trickle Channel (H <sub>TC</sub> ) =
Slope of Trickle Channel (S <sub>TC</sub> ) =
Slopes of Main Basin Sides (Smain) =
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =


Slopes of Main Basin Sides (Smain) =	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	
Initial Surcharge Area (A <sub>ISV</sub> ) =	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	ft
Depth of Basin Floor (H <sub>FLOOR</sub> ) =	ft
Length of Basin Floor $(L_{FLOOR})$ =	ft
Width of Basin Floor (W <sub>FLOOR</sub> ) =	ft
Area of Basin Floor (A <sub>FLOOR</sub> ) =	ft 2
Volume of Basin Floor (V <sub>FLOOR</sub> ) =	ft 3
Depth of Main Basin (H <sub>MAIN</sub> ) =	ft
Length of Main Basin (LMAIN) =	ft
Width of Main Basin (W <sub>MAIN</sub> ) =	ft
Area of Main Basin (A <sub>MAIN</sub> ) =	ft 2
Volume of Main Basin (V <sub>MAIN</sub> ) =	ft <sup>3</sup>
Calculated Total Basin Volume (Vtotal) =	acre-fee

	Depth Increment =		ft							
		Stage	Optional Override Stage (ft)	Length	Width	Area	Optional Override	Area	Volume	Volume
	Stage - Storage Description	Stage (ft)	Stage (ft)	Length (ft)	(ft)	(ft 2)	Area (ft 2)	(acre)	(ft 3)	(ac-ft)
	Top of Micropool									
es t										
t										
										<b>-</b>
										<b> </b>
								_		
						<u> </u>			<u> </u>	
										<b>-</b>
										<u> </u>

7/18/2023, 1:15 PM

MHFD-Detention\_v4-06\_D1\_WQCV.xlsm, Basin

MHFD-Detention, Version 4.06 (July 2022)



#### Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	29.38	acres
Watershed Length =	2,000	ft
Watershed Length to Centroid =	1,000	ft
Watershed Slope =	0.020	ft/ft
Watershed Imperviousness =	9.00%	percent
Percentage Hydrologic Soil Group A =	0.0%	percent
Percentage Hydrologic Soil Group B =	100.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1 br Painfall Donths -	Donwor - Canit	ol Buildin

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using

the embedded Colorado Urban Hydrograph Procedure.							
Water Quality Capture Volume (WQCV) =	0.025	acre-feet					
Excess Urban Runoff Volume (EURV) =	0.246	acre-feet					
2-yr Runoff Volume (P1 = 1.19 in.) =	0.370	acre-feet					
5-yr Runoff Volume (P1 = 1.5 in.) =	0.838	acre-feet					
10-yr Runoff Volume (P1 = 1.75 in.) =	1.307	acre-feet					
25-yr Runoff Volume (P1 = 2 in.) =	2.154	acre-feet					
50-yr Runoff Volume (P1 = 2.25 in.) =	2.727	acre-feet					
100-yr Runoff Volume (P1 = 2.52 in.) =	3.557	acre-feet					
500-yr Runoff Volume (P1 = 3.14 in.) =	5.062	acre-feet					
Approximate 2-yr Detention Volume =	0.156	acre-feet					
Approximate 5-yr Detention Volume =	0.246	acre-feet					
Approximate 10-yr Detention Volume =	0.536	acre-feet					
Approximate 25-yr Detention Volume =	0.761	acre-feet					
Approximate 50-yr Detention Volume =	0.794	acre-feet					
Approximate 100-yr Detention Volume =	1.032	acre-feet					
		-					

Optional User Overrides							
0.025	acre-feet						
	acre-feet						
1.19	inches						
1.50	inches						
1.75	inches						
2.00	inches						
2.25	inches						
2.52	inches						
	inches						


#### Define Zones and Basin Geometry

efine Zones and Basin Geometry		
Zone 1 Volume (WQCV) =	0.025	acre-fe
Zone 2 Volume (EURV - Zone 1) =	0.221	acre-fe
Zone 3 Volume (100-year - Zones 1 & 2) =	0.786	acre-fe
Total Detention Basin Volume =	1.032	acre-fe
Initial Surcharge Volume (ISV) =	user	ft <sup>3</sup>
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H <sub>total</sub> ) =	user	ft
Depth of Trickle Channel $(H_{TC})$ =	user	ft
Slope of Trickle Channel (S <sub>TC</sub> ) =	user	ft/ft
Slopes of Main Basin Sides (Smain) =	user	H:V
Basin Length-to-Width Ratio (R <sub>L/W</sub> ) =	user	

Initial Surcharge Area (A <sub>ISV</sub> ) =	user	ft <sup>2</sup>
Surcharge Volume Length (L <sub>ISV</sub> ) =	user	ft
Surcharge Volume Width (W <sub>ISV</sub> ) =	user	ft
Depth of Basin Floor $(H_{FLOOR})$ =	user	ft
Length of Basin Floor (LFLOOR) =	user	ft
Width of Basin Floor ( $W_{FLOOR}$ ) =	user	ft
Area of Basin Floor $(A_{FLOOR})$ =		ft <sup>2</sup>
Volume of Basin Floor $(V_{FLOOR}) =$	user	ft <sup>3</sup>
Depth of Main Basin (H <sub>MAIN</sub> ) =	user	ft
Length of Main Basin (L <sub>MAIN</sub> ) =	user	ft
Width of Main Basin ( $W_{MAIN}$ ) =	user	ft
Area of Main Basin (A <sub>MAIN</sub> ) =		ft <sup>2</sup>
Volume of Main Basin (V <sub>MAIN</sub> ) =	user	ft <sup>3</sup>
Calculated Total Basin Volume ( $V_{total}$ ) =	user	acre-feet

		1							
Depth Increment =		ft Optional	I	1	1	Optional		1	1
Stage - Storage Description	Stage (ft)	Override	Length (ft)	Width (ft)	Area (ft 2)	Override Area (ft <sup>2</sup> )	Area (acre)	Volume (ft 3)	Volume (ac-ft)
Top of Micropool		Stage (ft) 0.00				14,327	0.329	(11 )	(ac-II)
		1.00				16,461	0.378	15,394	0.353
		2.00				18,700	0.429	32,975	0.757
		3.00				21,039	0.483	52,844	1.213
		4.00				23,479	0.539	75,103	1.724


M#FD-Detention\_w4-06\_D1.xksm, Basin 8/1/2023, 11:22 AM

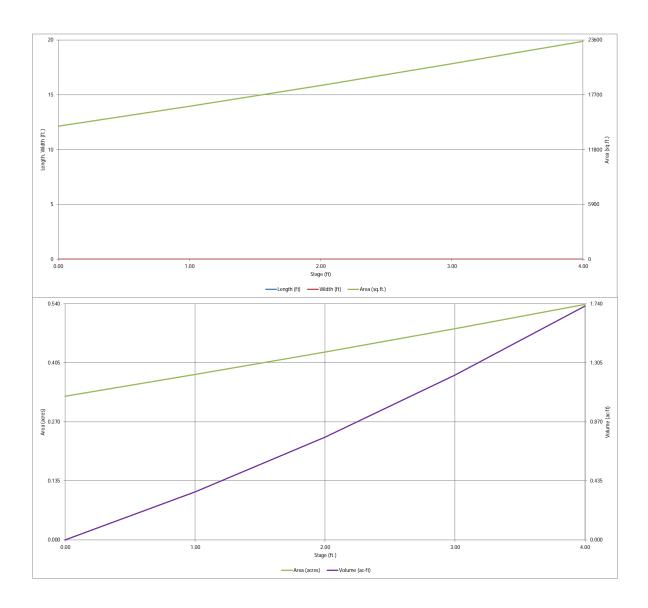

M#FD-Detention\_w4-06\_D1.xksm, Basin

## APPENDIX E: EL PASO COUNTY DRAINAGE BASIN MAP



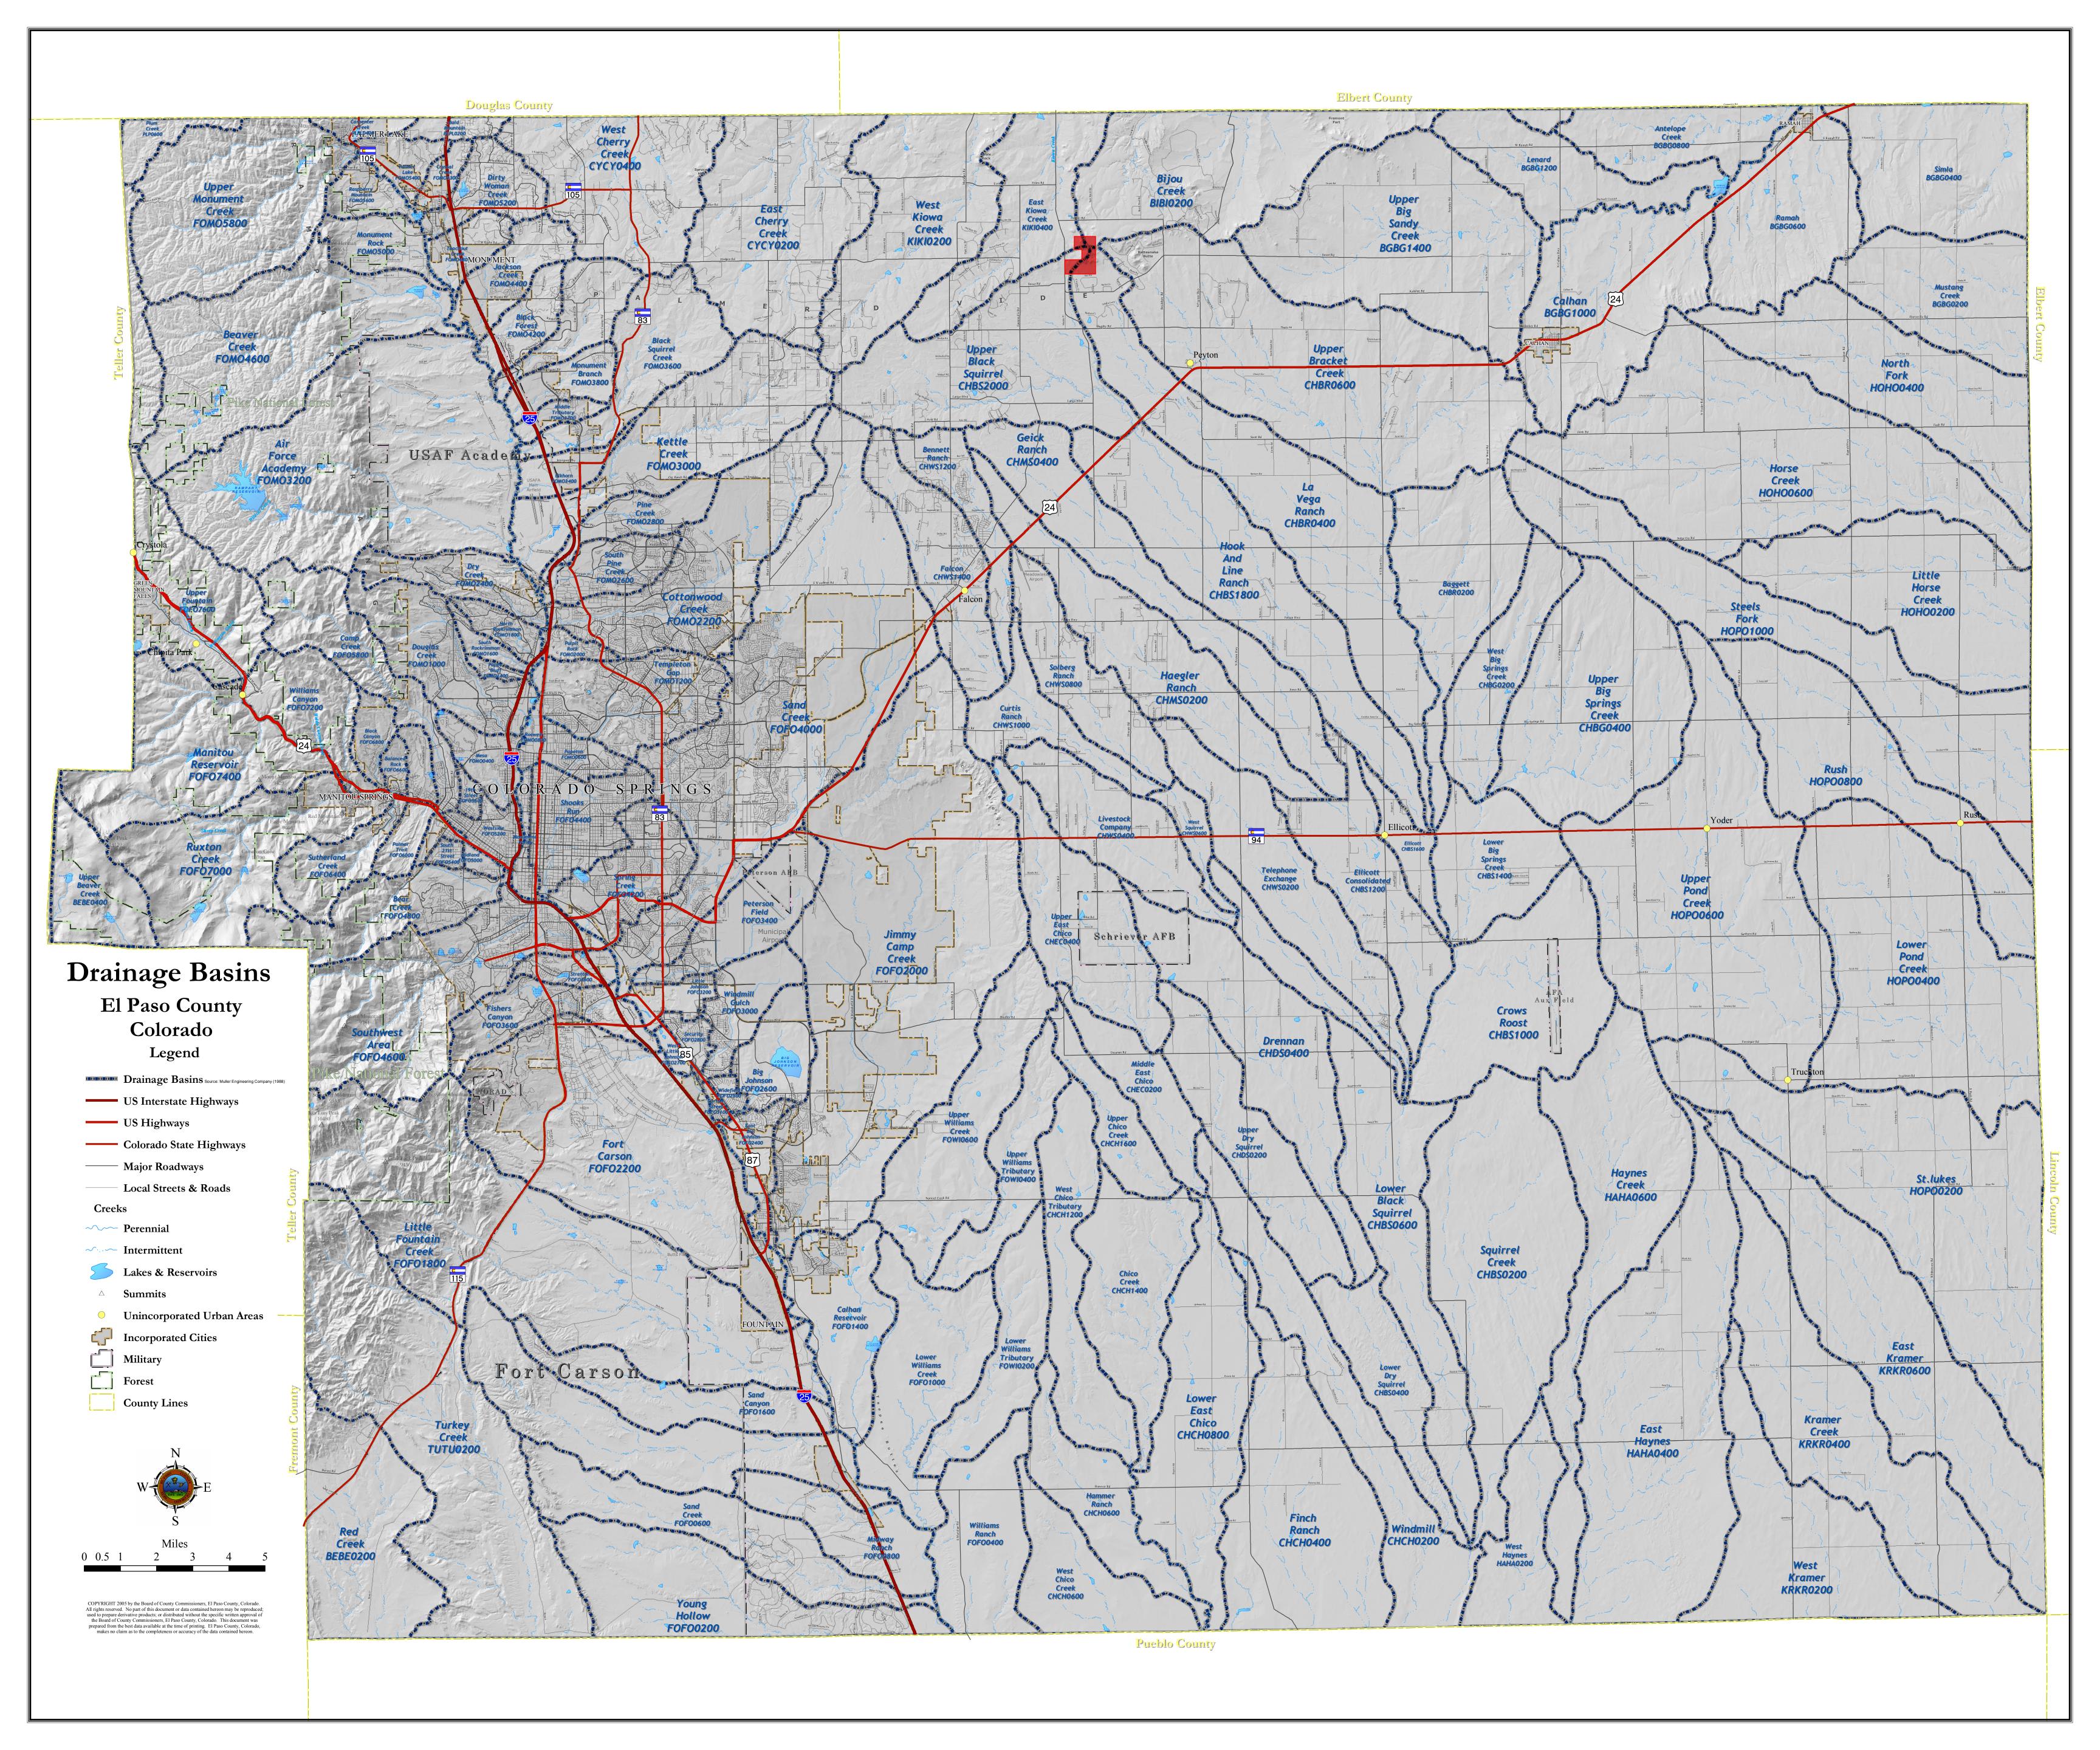

### APPENDIX F: APEX RANCH DRAINAGE REPORT



## Design Procedure Form: Extended Detention Basin (EDB) - Sedimentation Facility

Sheet 1 of 3

Designer: QUENTIN ARMIJO

Company: TERRA NOVA ENG.

Date: April 2, 2008

Project: APEX RANCH ESTATES

Location: PEYTON, CO 1. Basin Storage Volume 10.00  $l_a =$ A) Tributary Area's Imperviousness Ratio (i = I<sub>a</sub> / 100) 0.10 i = B) Contributing Watershed Area (Area) 76.80 acres Area = C) Water Quality Capture Volume (WQCV) WQCV = 0.07 watershed inches  $(WQCV = 1.0 * (0.91 * I^3 - 1.19 * I^2 + 0.78 * I))$ D) Design Volume: Vol = (WQCV / 12) \* Area \* 1.2 Vol = ...0.515 acre-feet 2. Outlet Works A) Outlet Type (Check One) Orifice Plate Perforated Riser Pipe Other: B) Depth at Outlet Above Lowest Perforation (H) H = 2.50 feet C) Required Maximum Outlet Area per Row, (A<sub>o</sub>) 0.81 square inches D) Perforation Dimensions (enter one only): i) Circular Perforation Diameter OR D =1.0000 inches, OR ii) 2" Height Rectangular Perforation Width W =inches E) Number of Columns (nc, See Table 6a-1 For Maximum) number nc = F) Actual Design Outlet Area per Row (A<sub>o</sub>) 0.79 square inches G) Number of Rows (nr) nr = 8 number H) Total Outlet Area (Aot)  $A_{ot} =$ 5.89 square inches 3. Trash Rack 200 square inches A) Needed Open Area: A<sub>t</sub> = 0.5 \* (Figure 7 Value) \* A<sub>ot</sub>

G) Number of Rows (nr)


H) Total Outlet Area (A<sub>ot</sub>)  $A_{ot} = \underbrace{ 5.89}_{Supare inches}$ Trash Rack

A) Needed Open Area: A<sub>t</sub> = 0.5 \* (Figure 7 Value) \* A<sub>ot</sub>

B) Type of Outlet Opening (Check One)  $X \leq 2^{"} \text{ Diameter } \underbrace{Round}_{Supare inches}$ C) For 2", or Smaller, Round Opening (Ref.: Figure 6a):


i) Width of Trash Rack and Concrete Opening (W<sub>conc</sub>) from Table 6a-1

ii) Height of Trash Rack Screen (H<sub>TR</sub>)  $H_{TR} = \underbrace{54}_{Inches}$ 

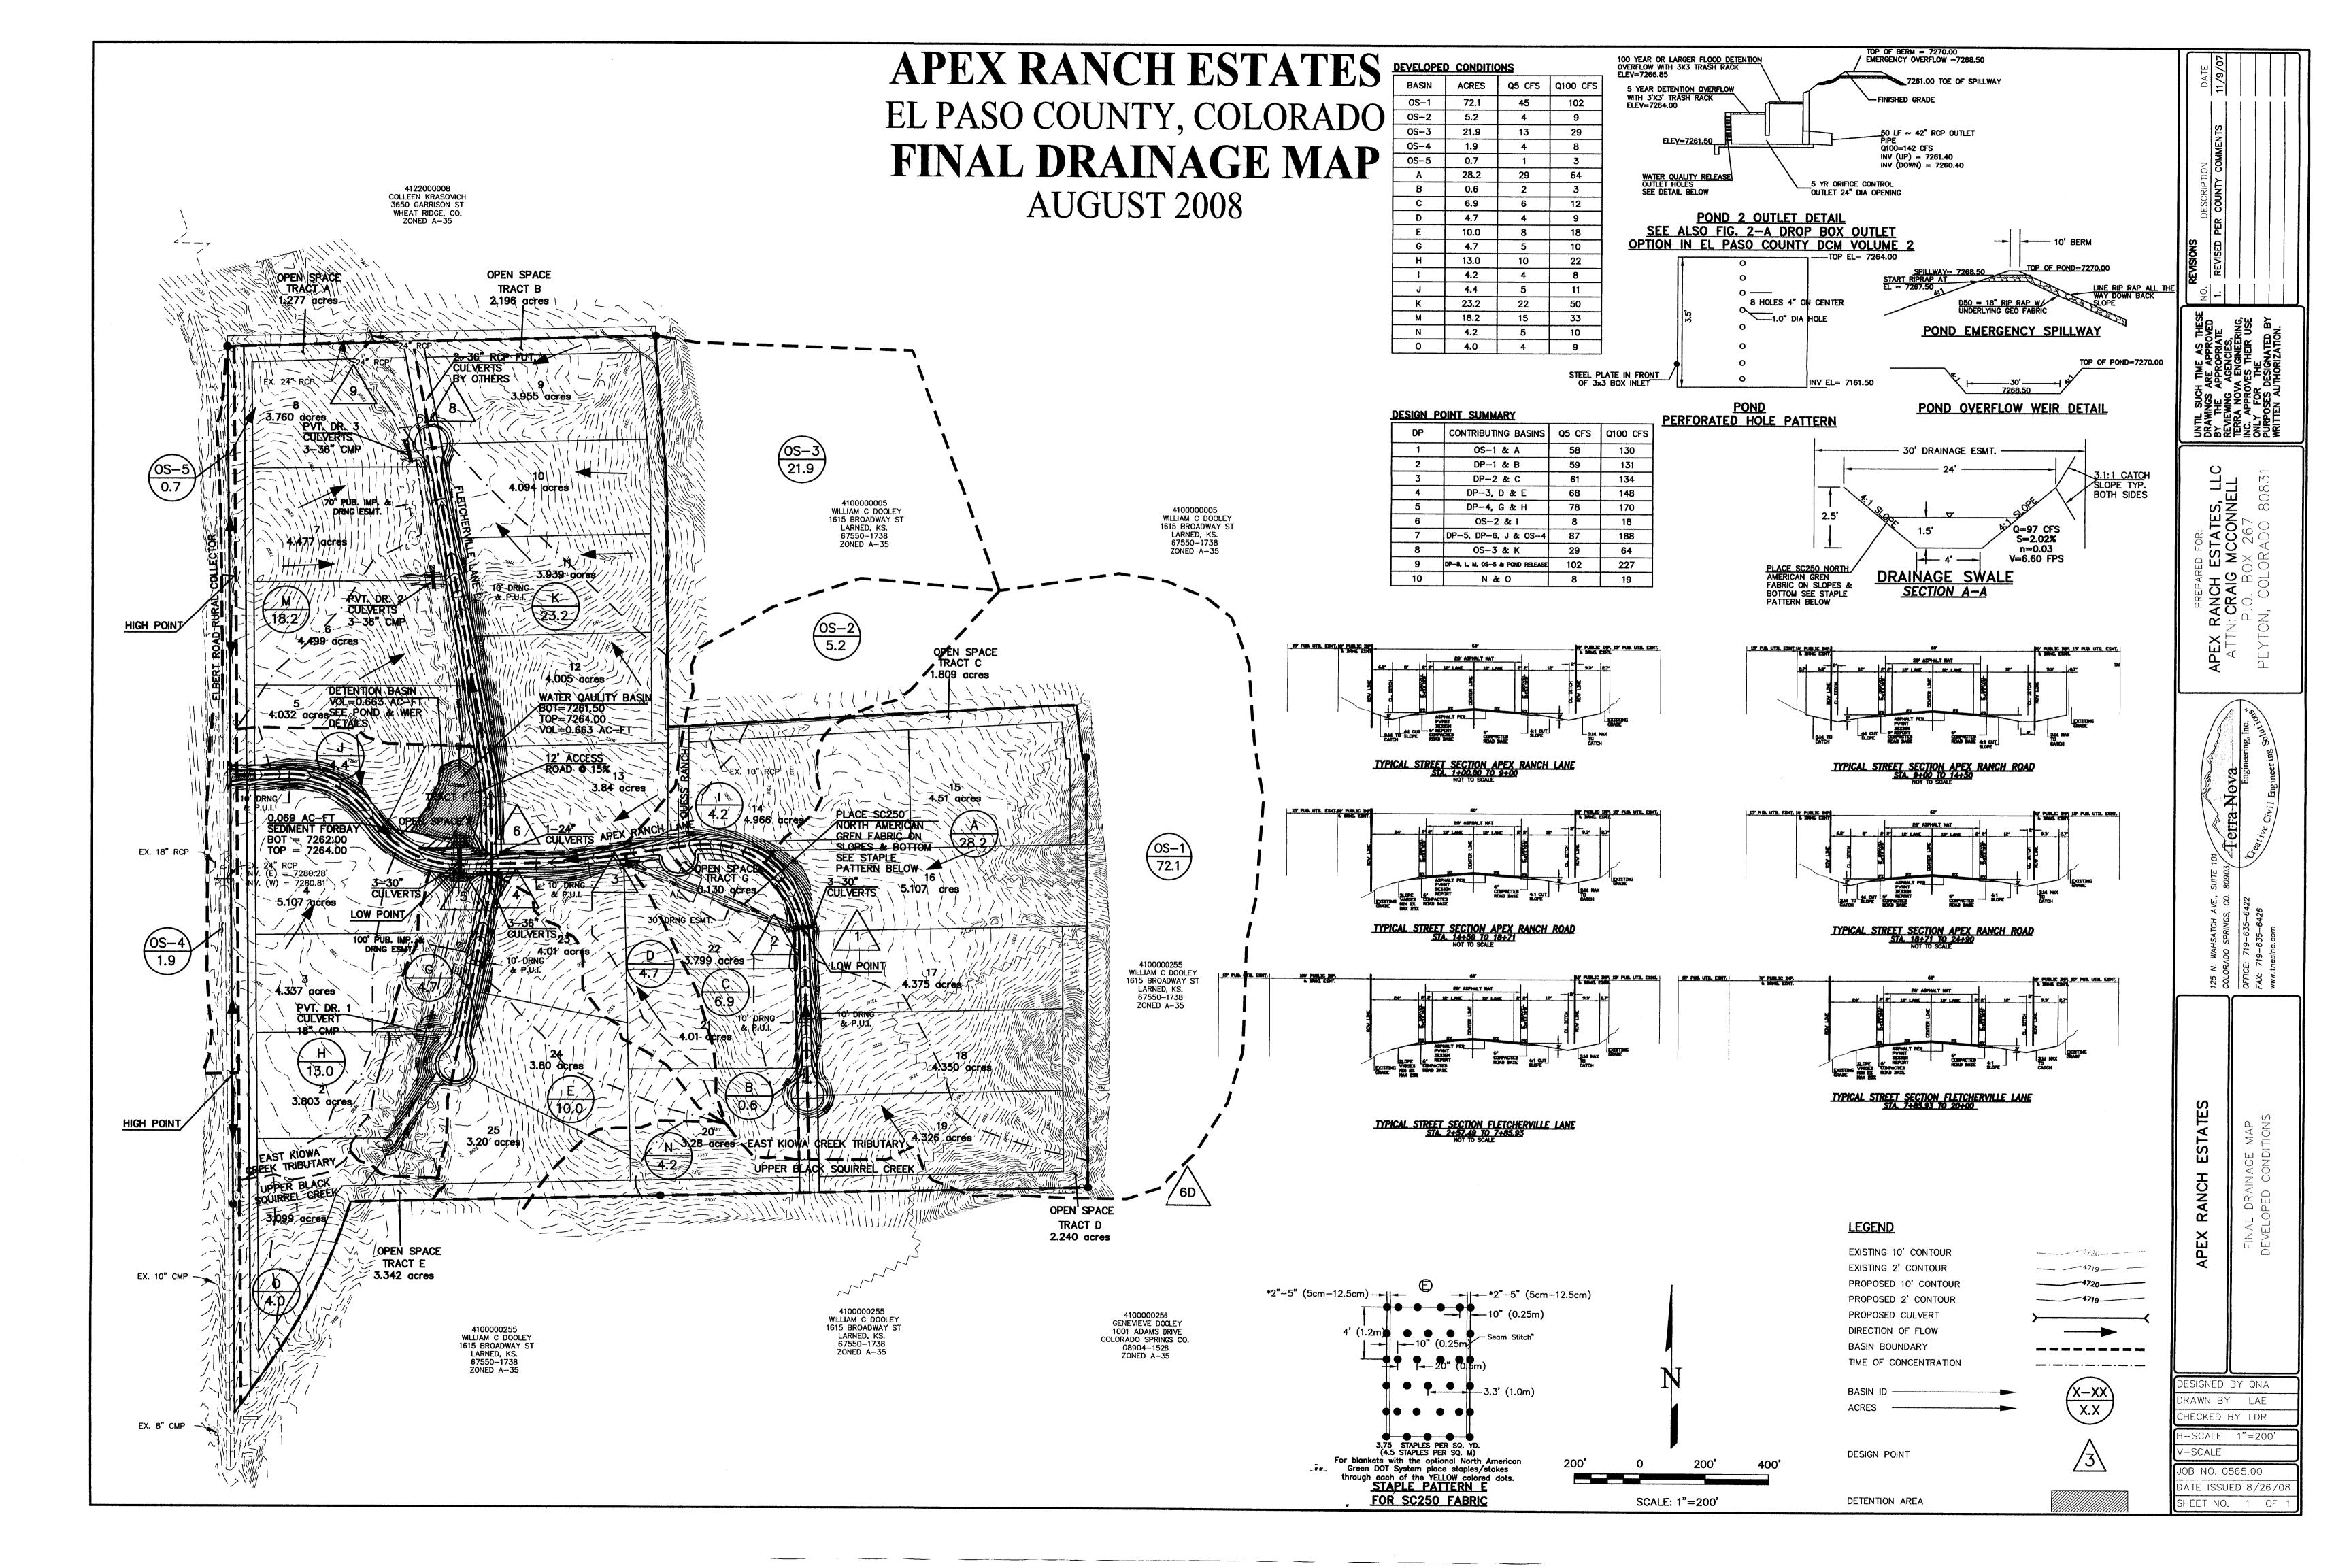


### APPENDIX G: DRAINAGE MAPS



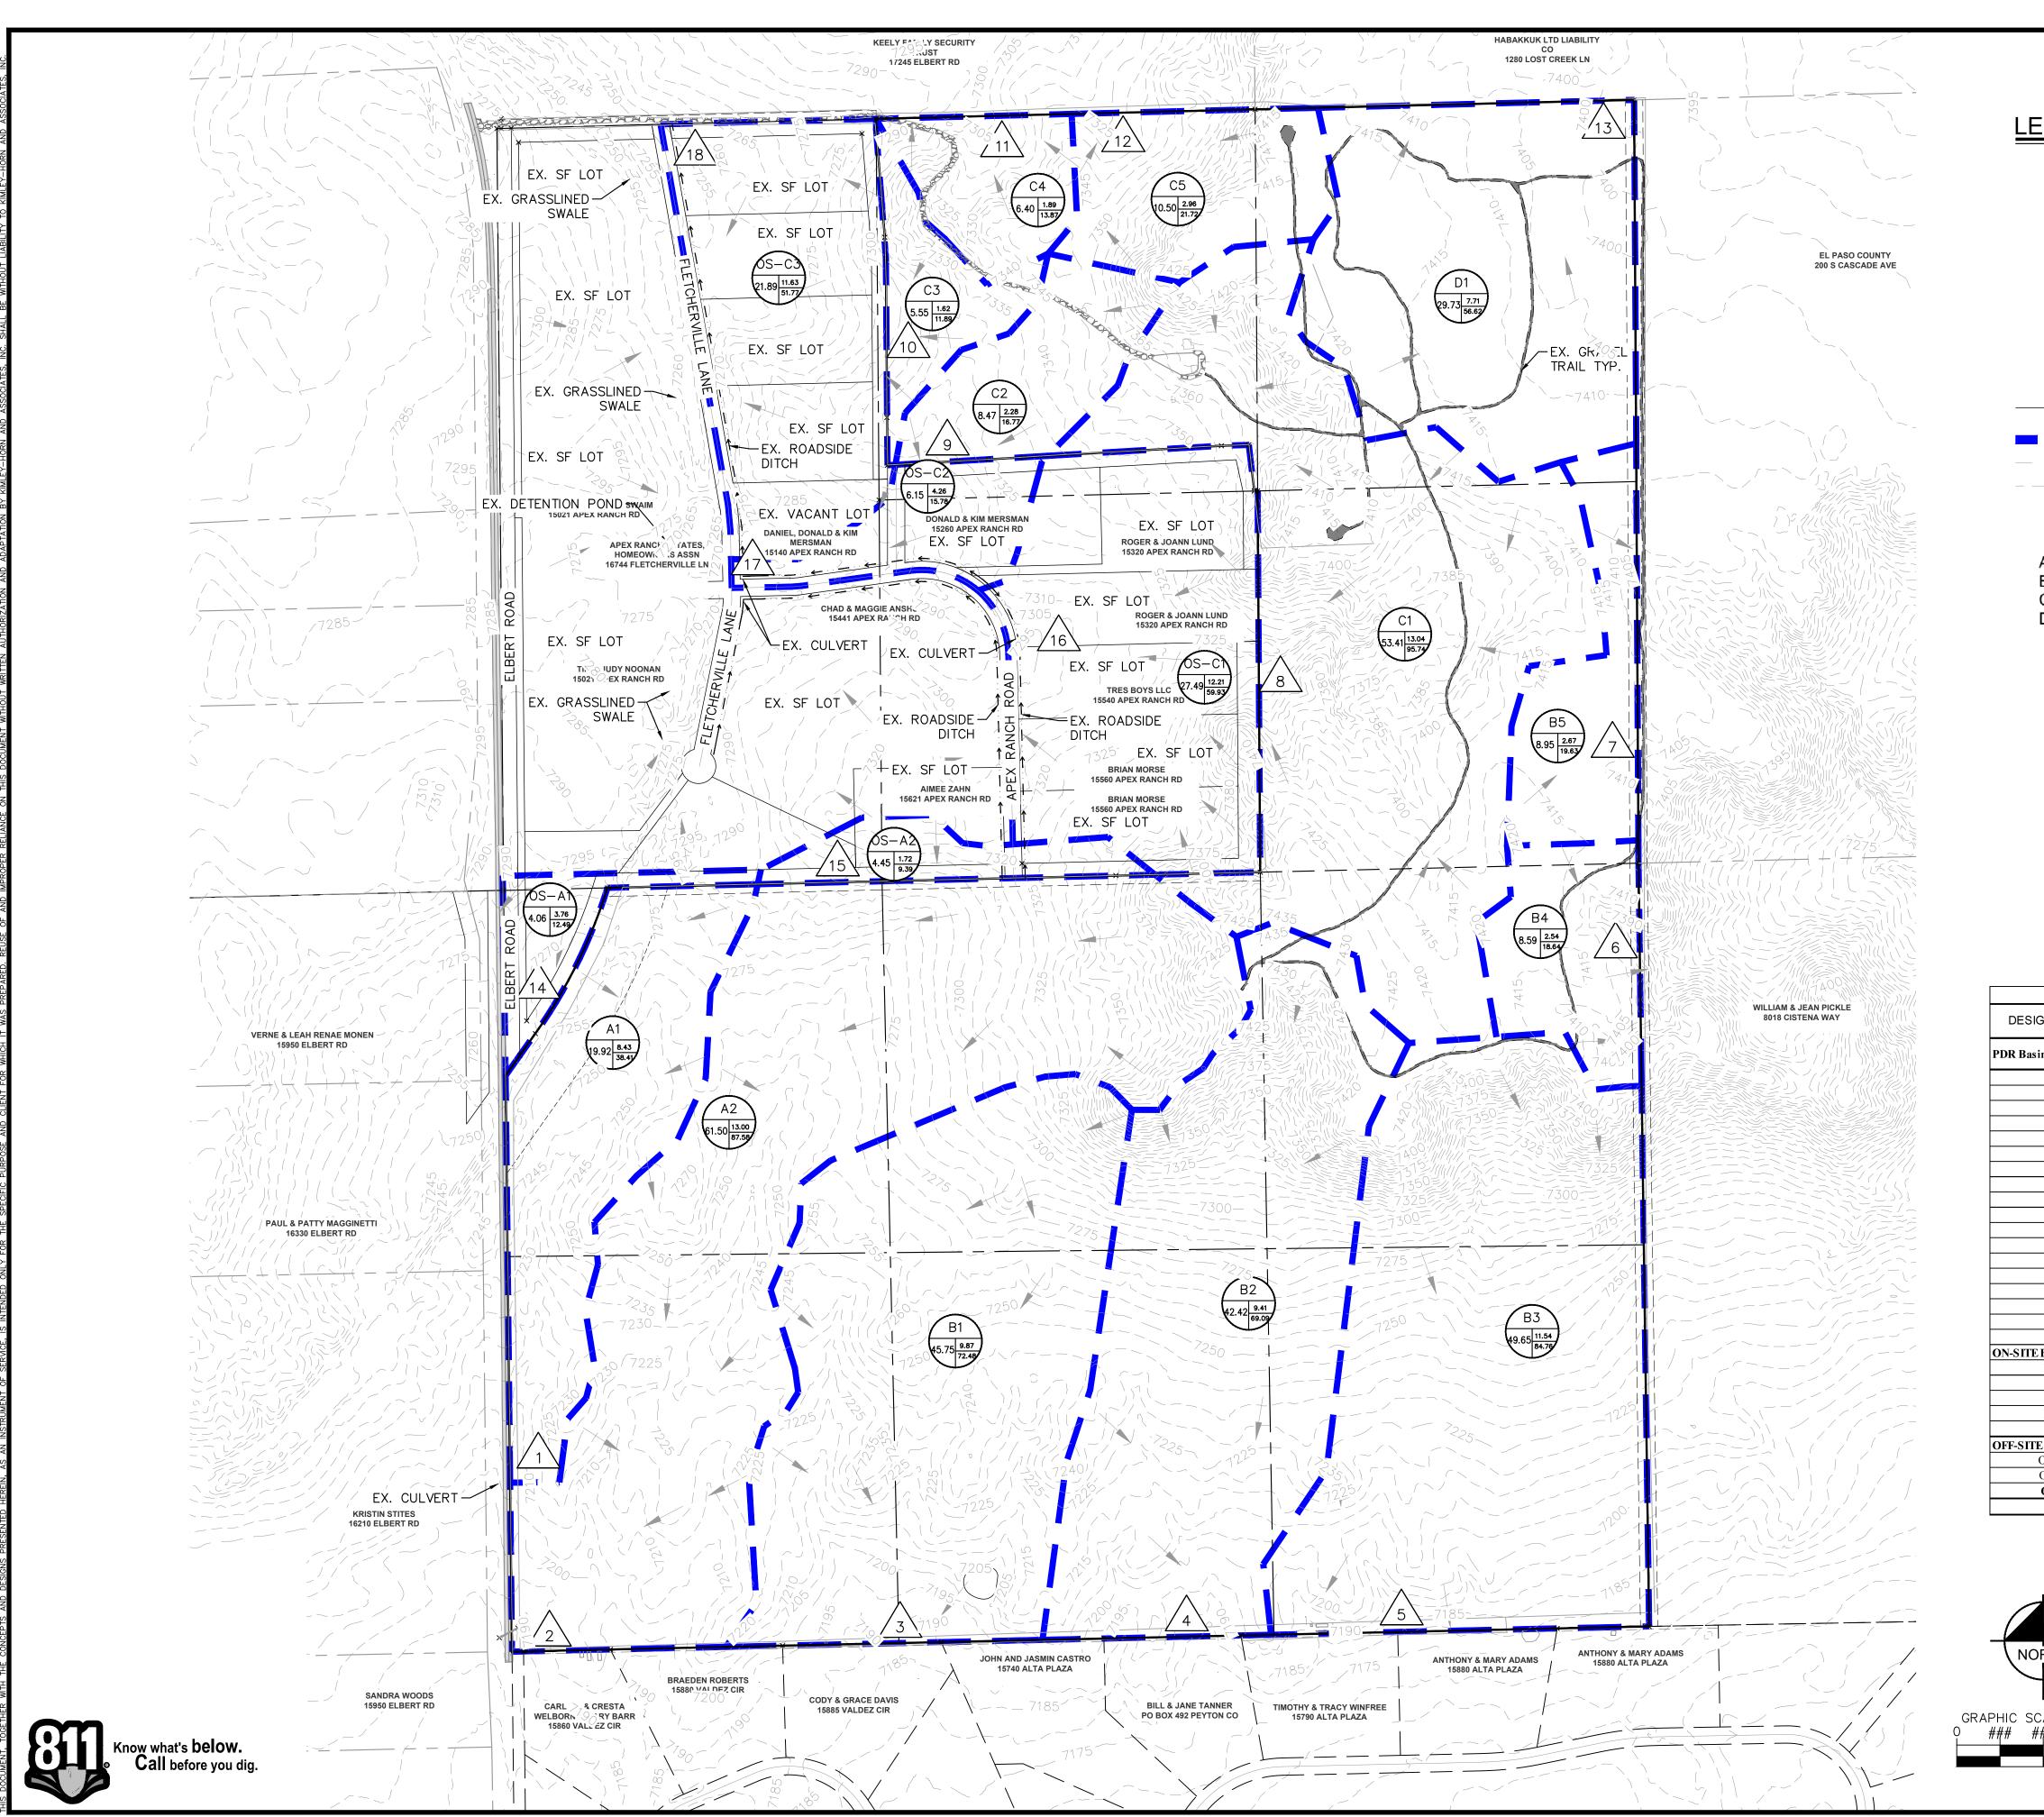





A = BASIN DESIGNATION

B = AREA (ACRES)

C = BASIN IMPERVIOUSNESSD = 100YR DESIGN STORM RUNOFF (CFS)

# = DESIGN POINT


EXISTING FLOW DIRECTION

PROPERTY LINE

DRAINAGE BASIN BOUNDARY EXISTING MAJOR CONTOUR EXISTING MINOR CONTOUR

- A Upper Black Squirrel Drainage Basin (CHBS2000)
  B La Vega Ranch Drainage Basin (CHBR0400)
  C East Kiowa Creek Drainage Basin (KIKI0400)
  D Bijou Creek Drainage Basin (BIBI0200)

EXIS <sup>-</sup>	TING CONDI	TIONS RATIONAL	CALCULA	TIONS S	SUMMAR	Υ
DESIGN POINT	TRIBUTARY	TRIBUTARY AREA		CFS		   % IMPERVIOUS
DESIGN POINT	BASINS	(AC)	Q2	Q5	Q100	70 IIVIPERVIOUS
PDR Basins						
1	A1	19.92	4.19	8.43	38.41	8%
2	A2	61.50	3.44	13.00	87.58	1%
3	B1	45.75	1.98	9.87	72.48	0%
4	B2	42.42	1.88	9.41	69.09	0%
5	В3	49.65	2.31	11.54	84.76	0%
6	B4	8.59	0.51	2.54	18.64	0%
7	B5	8.95	0.53	2.67	19.63	0%
8	C1	53.41	2.61	13.04	95.74	0%
9	C2	8.47	0.46	2.28	16.77	0%
10	C3	5.55	0.32	1.62	11.89	0%
11	C4	6.40	0.38	1.89	13.87	0%
12	C5	10.50	0.59	2.96	21.72	0%
13	D1	29.73	1.54	7.71	56.62	0%
14	OS-A1	4.06	2.36	3.76	12.49	19%
15	OS-A2	4.45	0.57	1.72	9.39	7%
16	OS-C1	27.49	4.90	12.21	59.93	9%
17	OS-C2	6.15	2.35	4.26	15.78	17%
18	OS-C3	21.89	5.33	11.63	51.77	11%
ON-SITE BASIN TOTA	L			•	•	•
BASIN A TO	TAL	81.42	7.63	21.43	125.99	3%
BASIN B TO	ΓAL	155.36	7.21	36.03	264.60	0%
BASIN C TO	ΓAL	84.33	4.35	21.78	159.98	0%
BASIN D TOTAL		29.73	1.54	7.71	56.62	0%
ON-SITE TOTAL		350.84	20.73	86.96	607.18	1%
OFF-SITE BASIN TOTA	AL					
OFF-SITE BAS		8.51	2.93	5.48	21.87	13%
OFF-SITE BAS	SIN C	55.53	12.58	28.11	127.48	11%
OFF-SITE TO	OFF-SITE TOTAL		15.52	33.59	149.36	11%




DESIGNED BY: XXX DRAWN BY: XXX CHECKED BY: XXX

DATE: XX/XX/XX


PRELIMINARY FOR REVIEW ONLY NOT FOR CONSTRUCTION Kimley»Horn Kimley-Horn and Associates, Inc.

> PROJECT NO. 196239003 SHEET

EX-1

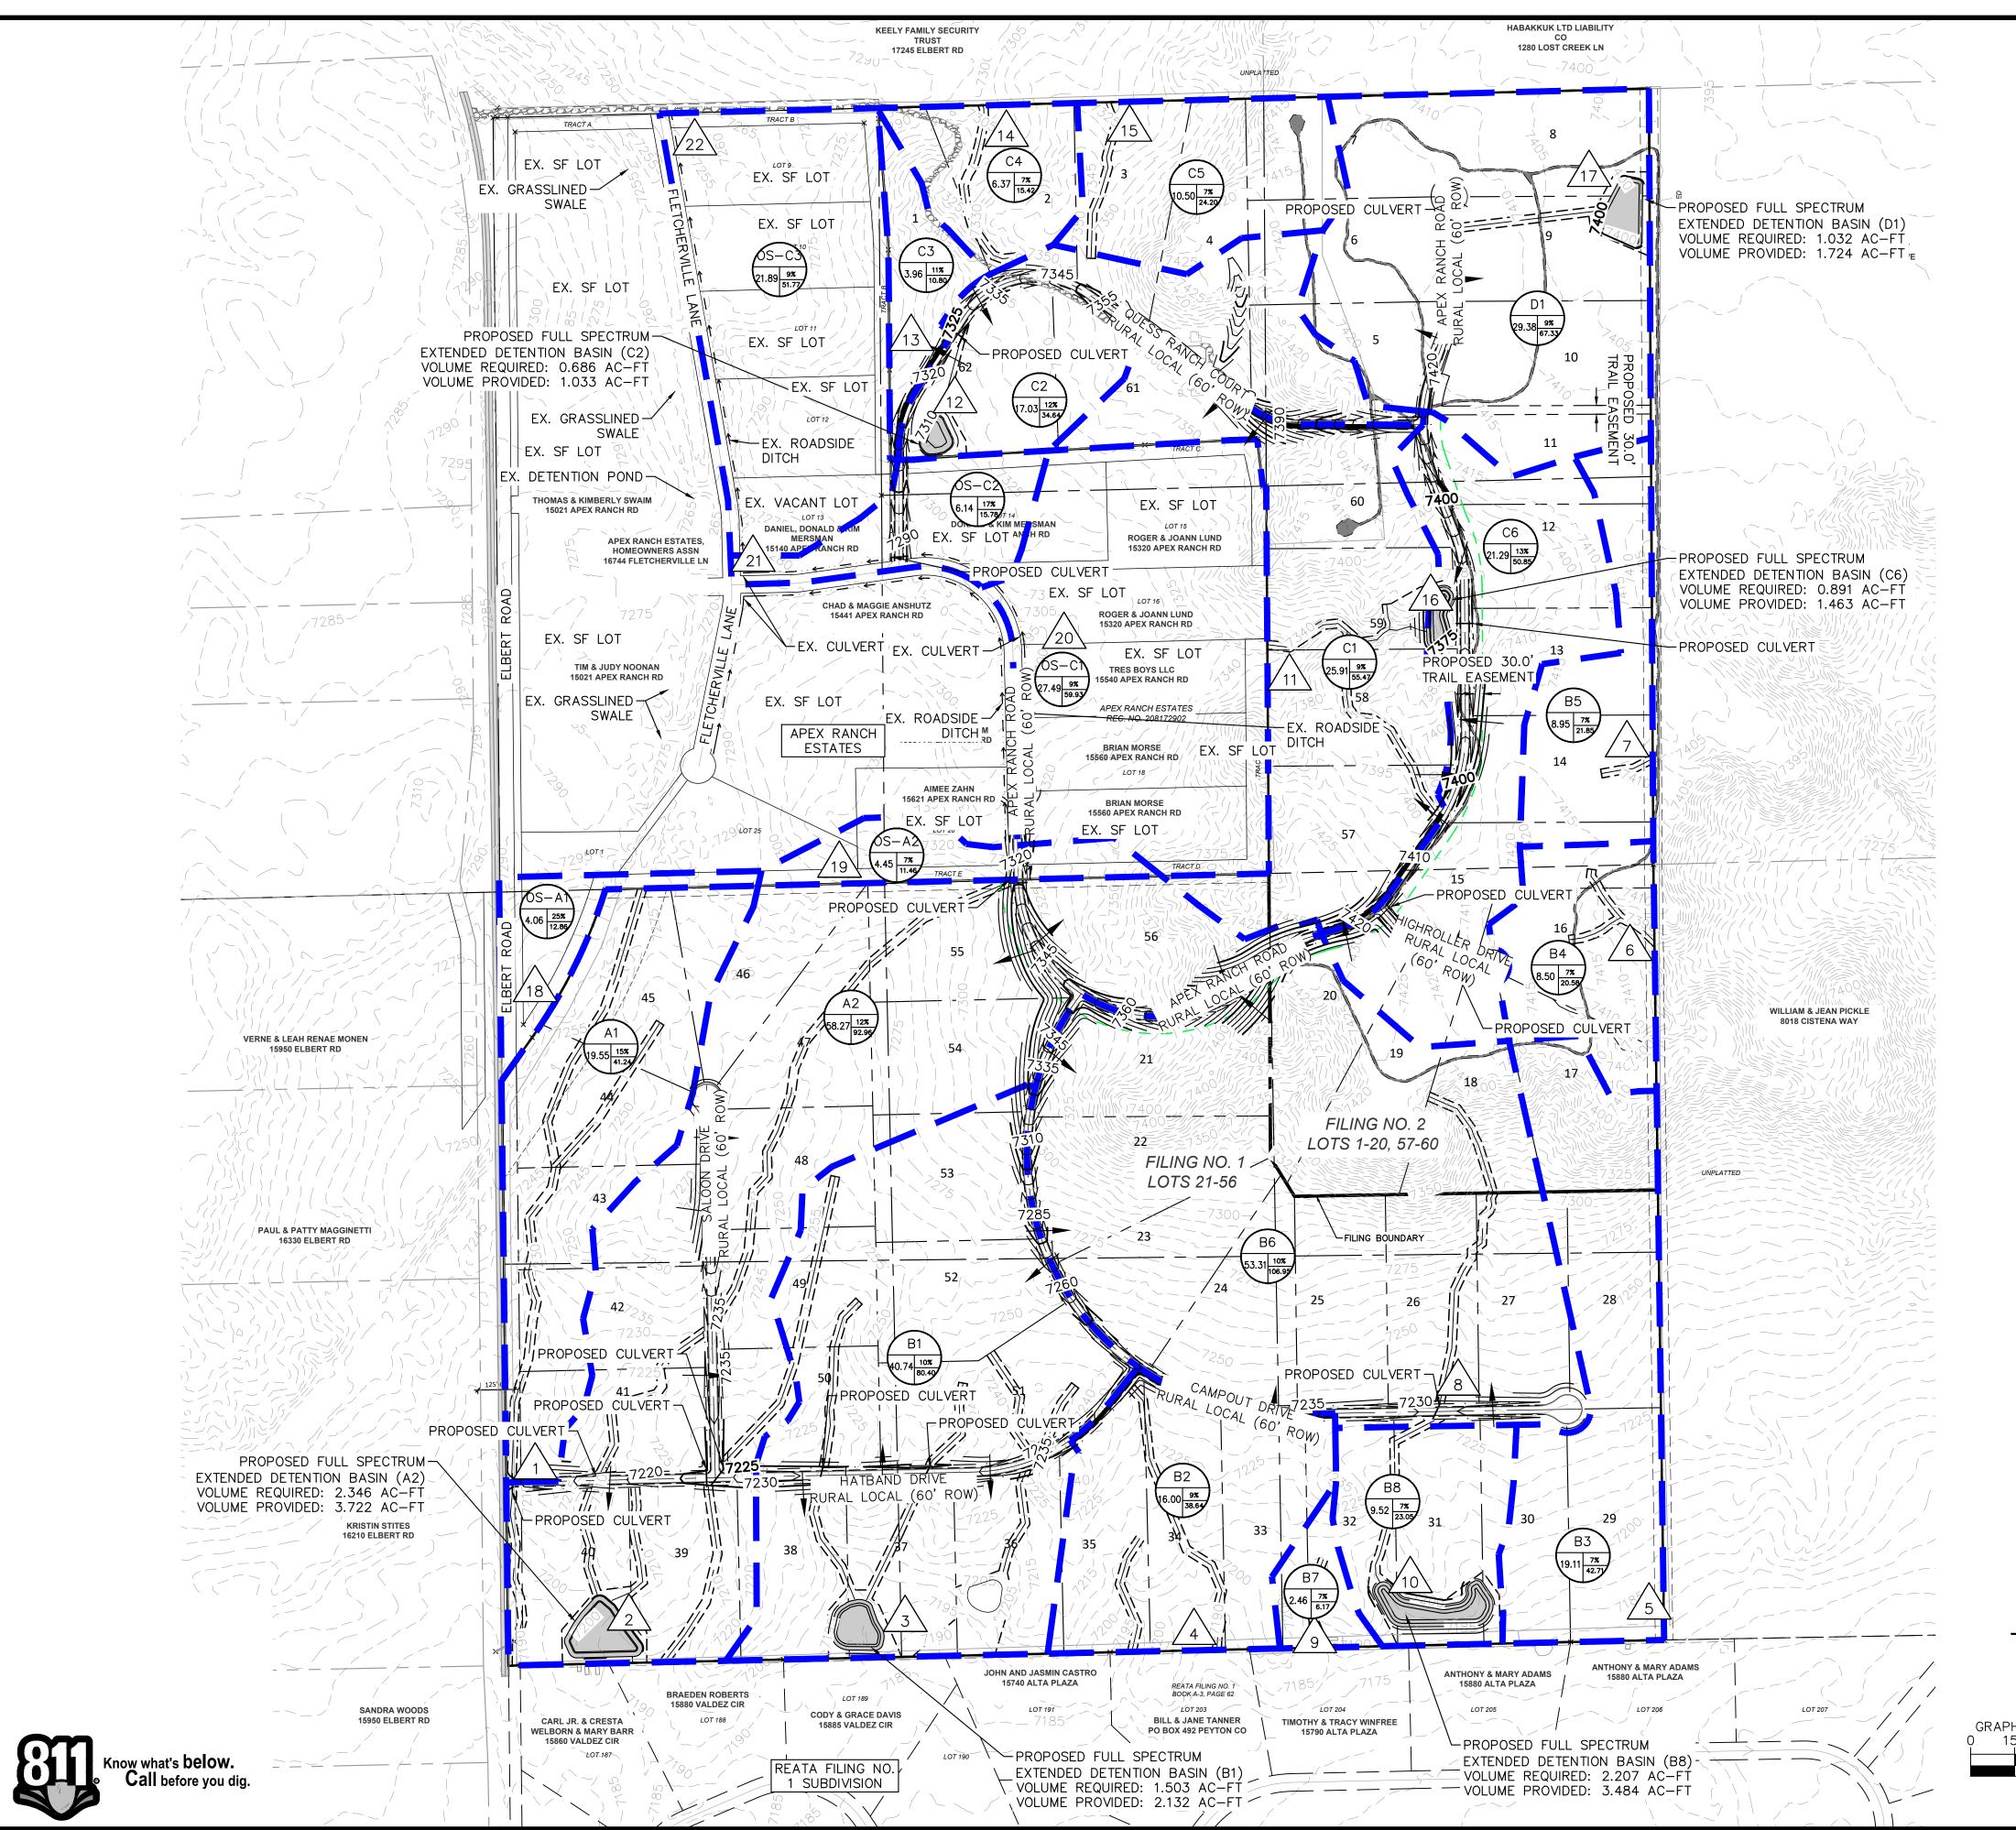





- A = BASIN DESIGNATION
- B = AREA (ACRES)
- C = BASIN IMPERVIOUSNESS

D = 100YR DESIGN STORM RUNOFF (CFS)

- # = DESIGN POINT

PROPOSED FLOW DIRECTION

PROPOSED PROPERTY LINE EXISTING PROPERTY LINE ---- PROPOSED EASEMENT LINE EXISTING MINOR CONTOUR

DRAINAGE BASIN BOUNDARY EXISTING MAJOR CONTOUR


PROPOSED MAJOR CONTOUR - XXXX ----- PROPOSED MINOR CONTOUR

## **EASEMENT NOTE**

- 1. ALL PROPOSED EASEMENTS ARE 30' DRAINAGE EASEMENTS UNLESS OTHERWISE NOTED
- A Upper Black Squirrel Drainage Basin (CHBS2000)
- B La Vega Ranch Drainage Basin (CHBR0400) C East Kiowa Creek Drainage Basin (KIKI0400)
- D Bijou Creek Drainage Basin (BIBI0200)

PROF	POSED CON	DITIONS RATIONA	L CALCUL	ATIONS.	SUMMA	RY
DESIGN POINT	TRIBUTARY	TRIBUTARY AREA		CFS		0/ IMPEDIAGUE
DESIGN POINT	BASINS	(AC)	Q2	Q5	Q100	% IMPERVIOUS
PDR Basins						
1	A1	19.55	5.41	10.41	41.24	15%
2	A2	58.27	9.71	20.99	92.96	12%
3	B1	40.74	6.97	16.77	80.40	10%
4	B2	16.00	3.10	7.82	38.64	9%
5	В3	19.11	2.61	7.83	42.71	7%
6	B4	8.50	1.25	3.77	20.58	7%
7	B5	8.95	1.33	4.01	21.85	7%
8	B6	53.31	9.52	22.55	106.95	10%
9	B7	2.46	0.38	1.13	6.17	7%
10	B8	9.52	1.41	4.22	23.05	7%
11	C1	25.91	4.42	11.18	55.47	9%
12	C2	17.03	3.87	8.08	34.64	12%
13	СЗ	3.96	1.04	2.36	10.80	11%
14	C4	6.37	0.94	2.83	15.42	7%
15	C5	10.50	1.48	4.44	24.20	7%
16	C6	21.29	6.09	12.27	50.85	13%
17	D1	29.38	5.34	13.56	67.33	9%
18	OS-A1	4.06	2.57	4.12	12.86	25%
19	OS-A2	4.45	0.70	2.10	11.46	7%
20	OS-C1	27.49	4.90	12.21	59.93	9%
21	OS-C2	6.15	2.35	4.26	15.78	17%
22	OS-C3	21.89	5.33	11.63	51.77	11%
ON-SITE BASIN TOT	AL			•		•
BASIN A TO		77.82	15.12	31.40	134.20	12%
BASIN B TO	OTAL	158.59	26.57	68.09	340.34	8%
BASIN C TOTAL		85.06	17.84	41.15	191.38	10%
BASIN D TOTAL		29.38	4.90	12.21	59.93	9%
ON-SITE TO	OTAL	350.85	49.75	122.80	599.06	10%
OFF-SITE BASIN TO	TAL .					
OFF-SITE BA	SIN A	8.51	3.27	6.22	24.32	15%
OFF-SITE BA	SIN C	55.53	12.58	28.11	127.48	11%
OFF-SITE TO	OTAL	64.04	15.85	34.33	151.80	12%
SITE TO	AL	414.89	65.60	157.13	750.86	10%





DESIGNED BY: XXX DRAWN BY: XXX


CHECKED BY: XXX DATE: XX/XX/XX

PRELIMINAR PROPOSED

PRELIMINARY FOR REVIEW ONLY NOT FOR CONSTRUCTION Kimley»Horn Kimley-Horn and Associates, Inc

> PROJECT NO. 196239003 SHEET

EX-2

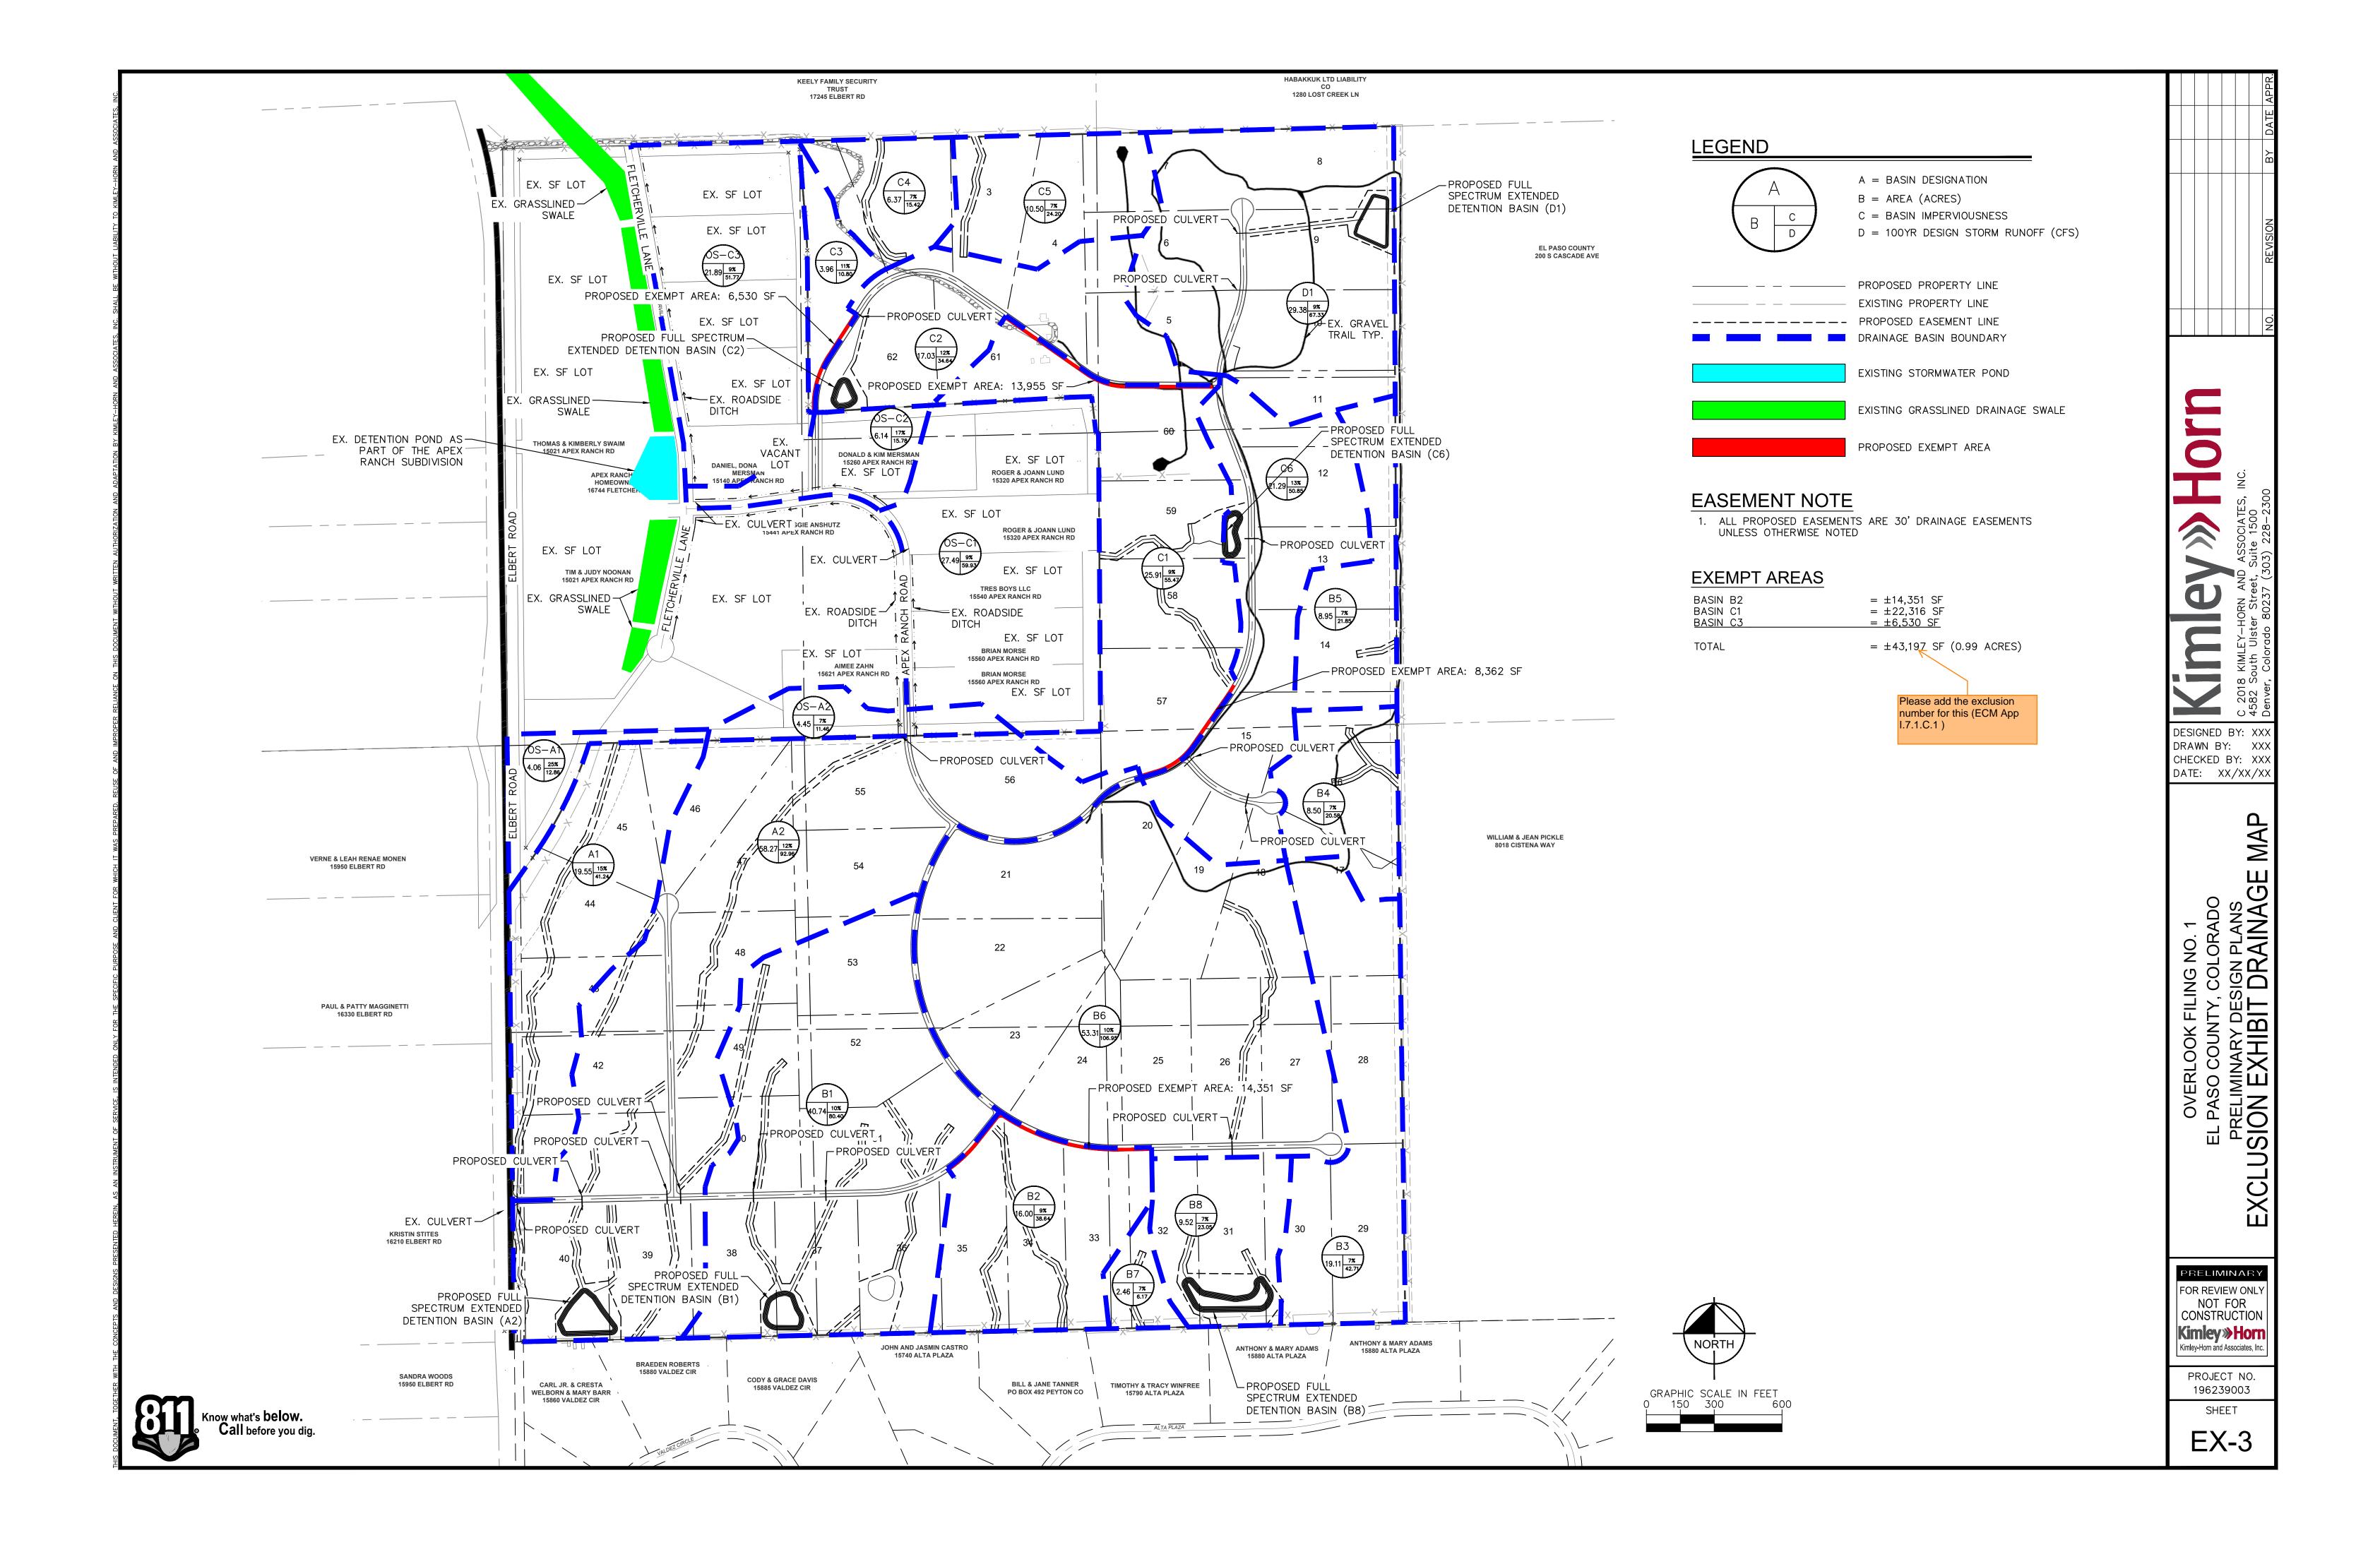

## v1\_Preliminary Drainage Report.pdf Markup Summary

#### eschoenheit (3)



Subject: Text Box Page Label: 13 Author: eschoenheit

Date: 11/2/2023 6:32:25 PM

Status: Color: Layer: Space:

Discuss the condition of the channels

Subject: Highlight

Page Label: [1] Ex Drainage Map-Drainage Exhibit

Author: eschoenheit

Date: 11/2/2023 6:53:48 PM

Status: Color: Layer: Space:

2.35 4.26 15.78 17% 5.33 11.63 51.77 11%

Subject: Highlight

Page Label: [1] Prop Drainage Map-Drainage Exhibit (2)

Author: eschoenheit

Date: 11/2/2023 6:53:42 PM

Status: Color: Layer: Space:

#### Mikayla Hartford (22)

SP238

Subject: SW - Textbox

Page Label: 1

Author: Mikayla Hartford Date: 11/2/2023 5:24:39 PM

Status: Color: Layer: Space:

Subject: Stamp - Stormwater Comment Legend

Page Label: 1

Author: Mikayla Hartford Date: 11/6/2023 9:24:17 AM

Status: Color: Layer: Space:

Subject: SW - Highlight

Page Label: 8

Author: Mikayla Hartford Date: 11/6/2023 9:37:44 AM

Status: Color: Layer: Space:

e existing detention pond.

SP238



Subject: SW - Textbox Page Label: 8

Author: Mikayla Hartford Date: 11/6/2023 9:50:03 AM

Status: Color: ■ Layer: Space: Also discuss the proposed 6 detention basins. Verify the existing detention pond is functioning as intended and if the existing pond provides WQ treatment as well.

ditches, is conveyed through proposed stommenter culverts, use private stommenter pond B1 at DP 3. The weighted 0%, Randf during the 5-year and 100-year events are 16.7 to the Appendix for the Proposed Conditions Drainage Map. Subject: SW - Highlight

Page Label: 9

Author: Mikayla Hartford Date: 11/6/2023 9:39:45 AM

Status:
Color:
Layer:
Space:

that will not be receiving water quality treatment.

Section 1.0. The control of the control (1.1) are not present to the control of t

Subject: SW - Highlight

Page Label: 9

Author: Mikayla Hartford Date: 11/6/2023 9:40:22 AM

Status: Color: Layer: Space: Drainage flows overland from west to east where it flows offsite at DP 7.

special control of the control of th

Subject: SW - Highlight

Page Label: 9

Author: Mikayla Hartford Date: 11/6/2023 9:40:47 AM

Status: Color: Layer: Space: Drainage flows overland from west to east where it flows offsite at DP 6.

waterian in Ch., Seein danig the Spain and Stoppin across and Lot to and the Contract St.

Contract Subject: SW - Textbox

Page Label: 9

Author: Mikayla Hartford Date: 11/6/2023 9:57:39 AM

Status: Color: ■ Layer: Space: There are basins that are not being captured by the proposed ponds, such as Basin B2 (see highlights throughout the basins). Explain in the narrative how WQ is being addressed for these basins. Possible exclusions include I.7.1.B.7 (land disturbance to undeveloped land that will remain undeveloped) and/or I.7.1.C.1 (which allows for 20% not to exceed 1 acre of the applicable development site area to not be captured).

And the same of th

Subject: SW - Highlight Page Label: 10

Author: Mikayla Hartford Date: 11/6/2023 9:41:16 AM

Status: Color: Layer: Space: ditches, is conveyed through a proposed stormwater culvert at DP 8, and into sub-basin B8.



Subject: SW - Highlight

Page Label: 10

Author: Mikayla Hartford Date: 11/6/2023 9:41:52 AM

Status: Color: Layer: Space:

. This sub-basin includes an approx. 6,530 sq ft improved area of roadway that will not be receiving water quality treatment.

Subject: SW - Highlight

Page Label: 11

Author: Mikayla Hartford Date: 11/6/2023 9:42:01 AM

Status: Color: Layer: Space:

Drainage flows overland from south to north where it flows offsite at DP 14.

Subject: SW - Highlight

Page Label: 11

Author: Mikayla Hartford Date: 11/6/2023 9:42:07 AM

Status: Color: Drainage flows overland from south to north where it flows offsite at DP 15.

Layer: Space:

Subject: SW - Highlight

Page Label: 11

Author: Mikayla Hartford Date: 11/6/2023 9:42:26 AM

Status: Color: Layer: Space:

Drainage flows overland from the northeast to

southwest where it is

captured by an existing drainage culvert at DP 18

and directed west of Elbert Road.

the use of the UD-D **Subject:** SW - Highlight Page Label: 12

DETENTION

Author: Mikayla Hartford Date: 11/6/2023 9:48:40 AM

Six full spectrum d quality. Mile High F Status: Color: Layer: Space:

**DETENTION** 

Subject: SW - Textbox Page Label: 12

Author: Mikayla Hartford Date: 11/6/2023 9:49:03 AM

Status: Color: ■ Layer: Space:

Is the existing detention pond proposed to be used for detention/flood control as well as the 6 proposed? Please clearly distinguish.

profession and the bost may present to proceed a sub-control of the bost may be controlled as the control of the bost may be controlled as the control of the bost may be controlled as the control of the bost may be controlled as the control of the bost may be controlled as the control of the bost may be controlled as the control of the bost may be controlled as the control of th

**Subject:** SW - Textbox **Page Label:** 13

Author: Mikayla Hartford Date: 11/6/2023 9:48:25 AM

Status: Color: ■ Layer: Space: Is the existing detention pond proposed to be used for WQ as well as the 6 proposed? Please clearly distinguish.

The ten to experience of the control of the control

Subject: SW - Highlight

Page Label: 13

Author: Mikayla Hartford Date: 11/6/2023 9:47:45 AM

Status:
Color: Layer:
Space:

 Permanent water quality measures and detention facilities will be necessary for the

Project.

inten 1 acro can be excluded from providing water quality. As mer 7 sq ft of impurious area will not be able to be treated which is real size. He can also the first of the providing water quality. As mer 7 sq ft of impurious area will not be able to be treated which is real size. He for Appendix 5 for 500th first providing the first of the first providing the firs

Subject: SW - Highlight

Page Label: 14

Author: Mikayla Hartford Date: 11/6/2023 9:45:43 AM

Status: Color: Layer: Space: Appendix F for PBMP Tributary Areas map.

Appendix G

or less than 1 acre can be excluded (43,197 sq ft of impervious area w the overall site. Per ECM Append from water quality treatment require or less. Refer to Appendix F for P

Subject: SW - Textbox Page Label: 14

Author: Mikayla Hartford Date: 11/6/2023 10:31:23 AM

Status: Color: ■ Layer: Space: Appendix G



Subject: SW - Textbox Page Label: 39

Author: Mikayla Hartford Date: 11/6/2023 9:33:15 AM

Status: Color: ■ Layer: Space: Note that the full MHFD will be required during the Final Drainage Report and Final Design and a more detailed review with be conducted then



Subject: SW - Textbox with Arrow

Page Label: 39

Author: Mikayla Hartford Date: 11/6/2023 10:04:24 AM

Status: Color: ■ Layer: Space: why is an override used? Typical comment

= ±43,197 SF (0.99 ACRES)

Subject: SW - Textbox with Arrow

Page Label: [3] Exemption Drainage Map-Layout1 Author: Mikayla Hartford

**Date:** 11/6/2023 10:31:04 AM

Status: Color: ■ Layer: Space:

Please add the exclusion number for this (ECM

App I.7.1.C.1)