




FOR REFERENCE ONLY, COORDINATE WITH KING SOOPERS PM FOR EXACT TYPE. FIELD VERIFY FOR SIZES AND QUANTITIES.

PART NUMBER	COMPONENTS PER SIGN LOCATION	PREVIEW
63C	QTY 1 - 18 X 12 SIGNS QTY 1 - SIGN MOUNTING BOLT SET	Pickup Location Pickup
63B	QTY 1 - 18 X 12 SIGNS QTY 1 - 6X12 PHONE NUMBER SIGN QTY 1 - 6X6 LANE NUMBER SIGN QTY 3 - SIGN MOUNTING BOLT SETS	Pickup Location Let us know you've arrived Call the number below (804) 952-4042
63C SIMILAR	QTY 1 - 18 X 12 SIGNS QTY 1 - SIGN MOUNTING BOLT SETS	Pickup P

04 CLICKLIST SIGNAGE SCALE: NOT TO SCALE

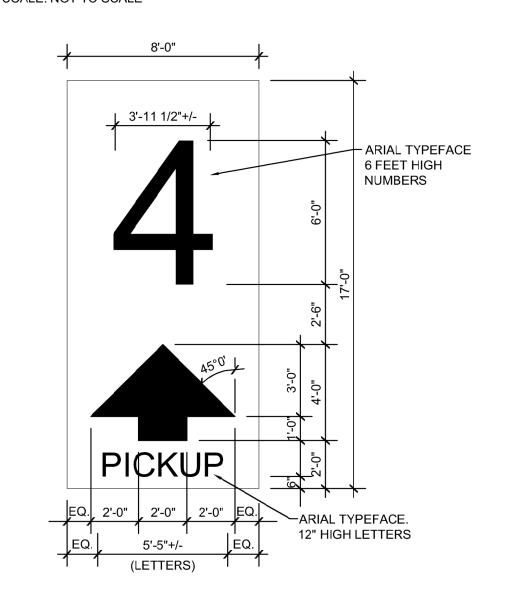

05 GRAPHICS DETAIL

- TWO SIGNS MOUNTED BACK TO BACK ON TUBE POST. --- INSTALL CAP AT TOP OF POST. SEE NOTE No. 5. — "PICKUP" LOCATION SIGN ON TUBE POST. 12" X 18". SEE NOTES No. 2 AND 3. — PHONE NUMBER SIGN OR DIRECTIONAL ARROW. 6" X 1: SEE NOTE No. 2. - LANE NUMBER SIGN 6" X 6". SEE NOTE No. 2. — 2" SQUARE TUBE GALVANIZED STEEL POST 6'-0" LONG WITH PRE-PUNCHED HOLES, WITH CAP AT TOP, BY BUSH CONCRETE PRODUCTS INC. OR EQUAL. - ADJUST POST TO HEIGHT INDICATED AND INSTAUL BOLT TO SECURE. SET ALL POSTS IN 10" DIAMETER x 36" DEEP CONCRETE FOUNDATION. ____ 4" CONCRETE BRICK PAVEMENT BASE GROUND INSTALLED ELEVATION - "PICKUP" INFORMATIONAL SIGN 63B 1. REFER TO SITE PLAN FOR LOCATIONS. 2. MOUNT SIGN ON POST USING PRE-PUNCHED HOLES IN POST.

3. SIGNS, BRACKETS AND HARDWARE OWNER SUPPLIED, CONTRACTOR INSTALLED.4. ALL OTHER COMPONENTS SUPPLIED AND INSTALLED BY CONTRACTOR.

 BOTTOM OF CAP TO ALIGN WITH TOP OF SIGN.
 REFER TO SPECIFICATION SECTION 10 14 27 FOR ADDITIONAL INFORMATION.

03 CIVIL STANDARD DETAILS

SCALE: NOT TO SCALE

"PICKUP" INFORMATIONAL SCALE: SCALE: DRAWN:

MASTER SPECIFICATION DETAI

GENERAL NOTES

- ALL EXISTING CONCRETE SIDEWALKS, HARDSCAPE, LANDSCAPE, SIGNAGE, AND ANY OTHER SITE OR BUILDING ELEMENTS TO REMAIN, UNLESS NOTED OTHERWISE.
- 2. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO ANY WORK.
- CONTRACTOR TO REMOVE AND REINSTALL EXISTING CART CORALS AS NEEDED TO PERFORM RE-STRIPING / RE-PAINTING WORK. COORDINATE WITH KING SOOPERS PROJECT MANAGER. FIELD VERIFY.
- 4. EXISTING BUILDING SIGNAGE TO REMAIN AS-IS UNLESS NOTED OTHERWISE.
- 5. SCHEDULE DEMOLITION PROJECT SEQUENCES WITH PROJECT MANAGER, STORE MANAGER AND JURISDICTIONAL OFFICIALS.
- 6. PROVIDE TEMPORARY CHAIN LINK FENCE WITH GREEN FABRIC FOR SCREENING EXTERIOR DEMOLITION AND CONSTRUCTION AREAS AND TO PREVENT BLOWING DEBRIS. COORDINATE LOCATIONS WITH KING SOOPERS
- 7. BUILDING IS TO BE SECURE DURING DEMOLITION AND CONSTRUCTION.

KEYED NOTES (#)

PROJECT MANAGER.

- VERIFY LOCATOINS OF CLICKLIST SIGNS AND UPDATE PICKUP DIRECTIONAL SIGNAGE TO CURRENT RE: CSD-63C.
- 2. NEW SIGN BASE PIPE BOLLARD TO BE PAINTED PT-002.
- 3. PROVIDE NEW "PICKUP" PARKING STALL PAINTING AND STRIPING TO MATCH EXISTING PER 5 / SP1.0. PAINT COLOR TO MATCH EXISTING PICKUP GRAPHICS.
- 4. ADD DIAGONAL STRIPING TO NEW "PICKUP" PARKING STALLS. NEW STRIPING TO MATCH EXISTING.
- 5. PROVIDE NEW "PICKUP" SIGNAGE AT EACH SIDE OF POST PER CSD-63B.
- 6. EXISTING PICKUP PARKING STRIPING AND GRAPHICS TO REMAIN.

FINISH SCHEDULE

SHERWIN WILLIAMS #4084 "SAFETY YELLOW"



KING SOOPERS STORE #134


7915 CONSTITUTION AVENUE COLORADO SPRINGS,

A DEVELOPMENT OF:
THE KROGER COMPANY

CO 80951



4949 SOUTH SYRACUSE ST.
SUITE 460
DENVER, COLORADO 80237
(p) 303.759.5777
(f) 720.360.4281
www.naosdg.com



JOB: SCALE: 2020056 VARIES

SHEET NO.

SP1.0

EXTERIOR PLANS, ELEVATIONS & DETAILS

COPYRIGHT © 2020 NAOS DESIGN GROUP, LLC.
THESE DRAWINGS, OR PARTS THEREOF, MAY NOT BE
REPRODUCED IN ANY FORM, BY ANY METHOD, FOR ANY
PURPOSE, WITHOUT PRIOR WRITTEN CONSENT FROM NAOS