

BRAKES PLUS  
SITE DEVELOPMENT PLAN  
2467 MARKSHEFFEL ROAD

SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

LAND AREA:

33,808 SQ. FT. OR 0.776 ACRES MORE OR LESS

BASIS OF BEARING:

BEARINGS SHOWN HEREON ARE ASSUMED AND BASED UPON THE NORTH LINE OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST, 6TH P.M., CITY OF COLORADO SPRINGS, COUNTY OF EL PASO, STATE OF COLORADO WHICH BEARS N89°46'34"E BETWEEN THE MONUMENTS SHOWN HEREON.

BENCHMARK:

LOCATED AT THE NORTHEAST CORNER OF ROXANNE COURT AND BISMARK ROAD AS A NAIL AND WASHER ON THE TOP OF A CONCRETE STORM VAULT (ELEVATION = 6542.01 NAVD 1988)

LEGAL DESCRIPTION

LOT 1, BLOCK 1, CLAREMONT RANCH, FILING NO. 9C

ADA NOTE:

THE PARTIES RESPONSIBLE FOR THIS PLAN HAVE FAMILIARIZED THEMSELVES WITH ALL CURRENT ACCESSIBILITY CRITERIA AND SPECIFICATIONS AND THE PROPOSED PLAN REFLECTS ALL SITE ELEMENTS REQUIRED BY THE APPLICABLE ADA DESIGN STANDARDS AND GUIDELINES AS PUBLISHED BY THE UNITED STATES DEPARTMENT OF JUSTICE. APPROVAL OF THIS PLAN BY EL PASO COUNTY DOES NOT ASSURE COMPLIANCE WITH THE ADA OR ANY REGULATIONS OR GUIDELINES ENACTED OR PROMULGATED UNDER OR WITH RESPECT TO SUCH LAWS.

FEMA CLASSIFICATION

THIS SITE IS NOT WITHIN A DESIGNATED F.E.M.A. FLOODPLAIN AS DETERMINED BY FLOOD INSURANCE RATE MAP, COMMUNITY PANEL NUMBER 08041C0756G EFFECTIVE DATE DECEMBER 7, 2018 AND IS LABELED AS A ZONE "X" AREA, OR AREA OF MINIMAL FLOOD HAZARD.

NOTICE AND WARNING:

COMPLIANCE WITH THE AMERICANS FOR DISABILITIES ACT ("ADA") AND OTHER FEDERAL AND STATE ACCESSIBILITY LAWS IS THE SOLE RESPONSIBILITY OF THE PROPERTY OWNER. THEREFORE, COMPLIANCE WITH CITY CODES DOES NOT ASSURE COMPLIANCE WITH THE ADA OR ANY OTHER FEDERAL OR STATE ACCESSIBILITY LAWS OR ANY REGULATIONS OR GUIDELINES ENACTED OR PROMULGATED UNDER OR WITH RESPECT TO SUCH LAWS. THE CITY OF FOUNTAIN IS NOT RESPONSIBLE FOR ENFORCEMENT OF THE ADA OR ANY OTHER FEDERAL OR STATE ACCESSIBILITY LAWS.

PROPERTY OWNER ACKNOWLEDGEMENT

BRAKES PLUS, LLC, BEING THE OWNER(S) OF THE LAND DESCRIBED HEREIN HAVE CAUSED SAID LAND TO BE SITE PLANNED UNDER THE NAME OF BRAKES PLUS, LLC. ALL CONDITIONS, TERMS, AND SPECIFICATIONS DESIGNATED OR DESCRIBED ON THIS DOCUMENT SHALL BE BINDING ON THE OWNERS, THEIR HEIRS, SUCCESSORS AND ASSIGNS.

NO CHANGES MAY BE MADE TO THIS SITE DEVELOPMENT PLAN WITHOUT CITY APPROVAL. MINOR CHANGES TO THE SITE DEVELOPMENT PLAN MAY BE APPROVED ADMINISTRATIVELY BY THE CITY PLANNING DEPARTMENT. MAJOR CHANGES TO THIS SITE DEVELOPMENT PLAN, ESPECIALLY DELETIONS OF APPROVED ITEMS OR SUBSTANTIAL CHANGES IN BUILDING LOCATION SHALL BE SUBJECT TO THE SAME APPLICATION, REVIEW AND APPEAL PROCESSES APPLICABLE TO THE ORIGINAL SITE DEVELOPMENT PLAN. ENGINEERING, GRADING, AND CONSTRUCTION PLANS ARE NOT PART OF THIS APPROVAL.

IN WITNESS WHEREOF, WE HAVE HEREUNTO SET OUR HANDS AND SEALS THIS \_\_\_\_ DAY OF \_\_\_\_\_, 20\_\_\_\_.

[PROPERTY OWNER]


NOTARY CERTIFICATE  
(STATE OF )  
(COUNTY OF )

THE FOREGOING INSTRUMENT WAS ACKNOWLEDGED BEFORE ME THIS \_\_\_\_ DAY OF \_\_\_\_\_, 20\_\_\_\_,  
BY \_\_\_\_\_ (NAME AND TITLE)

MY COMMISSION EXPIRES: \_\_\_\_\_

ADDRESS OF NOTARY: \_\_\_\_\_

NOTARY PUBLIC

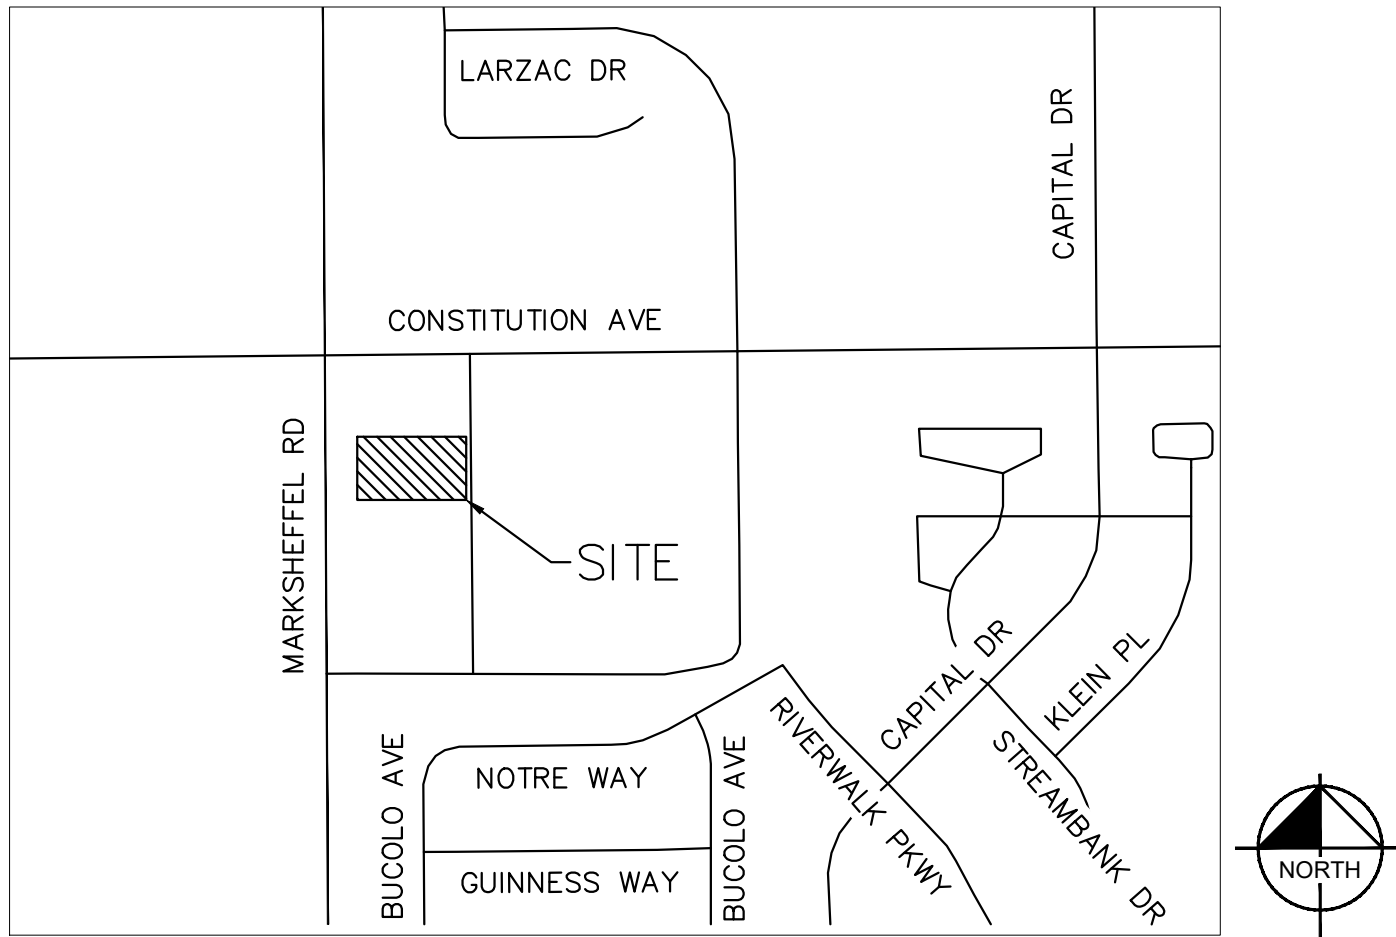

VICINITY MAP  
NOT TO SCALE

Sheet List Table	
Sheet Number	Sheet Title
1	COVER SHEET
2	SITE PLAN
3	UTILITY PLAN
4	DETAILS

*	5	LANDSCAPE PLAN
*	6	LANDSCAPE DETAILS
*	7	LANDSCAPE NOTES

*	8	BUILDING FLOOR PLAN
*	9	BUILDING ELEVATIONS

*	10	PHOTOMETRIC PLAN
---	----	------------------

\*SHEET IS INCLUDED IN SUBMITTAL AS SEPARATE DOCUMENT

CONTACTS:

DEVELOPER:  
BRAKES PLUS, LLC.  
6951 SOUTH BLACKHAWK STREET #700  
ENGLEWOOD, CO 80112  
TEL: (720) 247-2629  
CONTACT: BOB GIESE

ARCHITECT:  
ARCODEV ARCHITECTS  
5265 RIO GRANDE STREET, SUITE 202  
LITTLETON, CO 80120  
TEL: (303) 385-1203  
CONTACT: NORM HERMAN

ENGINEER  
KIMLEY-HORN AND ASSOCIATES, INC.  
2801 AUTOMATION WAY, SUITE 210  
FORT COLLINS, CO 80525  
TEL: (303) 228-2300  
CONTACT: EMILY FELTON, P.E.

SURVEYOR:  
ALTURA LAND CONSULTANTS  
6950 S TUCSON WAY  
CENTENNIAL, CO 80112  
TEL: (720) 488-1303  
CONTACT: JESUS LUGO P.L.S.

LANDSCAPE ARCHITECT:  
KIMLEY-HORN AND ASSOCIATES, INC.  
4582 SOUTH ULSTER STREET, SUITE 1500  
DENVER, CO 80237  
TEL: (303) 228-2300  
CONTACT: CHRIS HEPLER, P.L.A.

OWNER:  
RED ARROW CAPITAL, INC.  
7076 SOUTH ALTON WAY, BLDG D  
CENTENNIAL, CO 80112  
TEL: (720) 274-2603  
CONTACT: DEAN PISCIOTTA

SITE DATA

SITE AREA:	0.776± AC (33,808 SF)
ZONING CLASSIFICATION:	COMMERCIAL REGIONAL (CR)
LAND USE:	AUTO REPAIR
JURISDICTION:	EL PASO COUNTY
SITE ADDRESS:	2467 MARKSHEFFEL ROAD
TAX SCHEDULE NO.:	5404210069
BUILDING SETBACKS:	50' FRONT SETBACK 25' SIDE SETBACK 25' REAR SETBACK
MAXIMUM LOT COVERAGE:	N/A
PROPOSED EASEMENTS:	NONE
LANDSCAPE:	5% OF INTERIOR LOT REQUIRED (1,691 SF)
SITE COVERAGE:	BUILDING - 4,839 SF   14%± DRIVEWAY AND PARKING - 17,061 SF   50%± SIDEWALKS AND HARDSCAPE - 1,142 SF   3%± LANDSCAPING - 10,766 SF   32%±

BUILDING DATA

TOTAL GROSS BUILDING AREA:	4,839 S.F.
BUILDING HEIGHT:	28.00'
PROPOSED: MAXIMUM BY CODE:	45.0
PROPOSED LOT COVERAGE:	14.3%±
CONSTRUCTION TYPE:	V-B (NON SEPARATED MIXED USE)
OCCUPANCY CLASSIFICATION:	M AND S-1

ON-SITE PARKING COUNTS

	PARKING REQUIRED	PARKING PROVIDED
OFF-STREET PARKING	5	20
ADA	1	1
BICYCLE PARKING	1	2

OVERALL SUBDIVISION PARKING COUNTS

	PARKING REQUIRED	PARKING PROVIDED
COMMERCIAL CENTERS (>10 AC) (KING SOOPERS)	410 (1 SPACE/300 SF)	548
FINANCIAL INSTITUTION (ENT BANK)	18 (1 SPACE/250 SF)	29*
AUTO SALES (BRAKES PLUS)	5	20
DRIVE-IN/FAST FOOD RESTAURANT (STARBUCKS)	24 (1 SPACE/100 SF)	25

\*PARKING COUNT FOR ENT BANK INCLUDES 27 EXISTING STALLS & 2 PROPOSED STALLS WITHIN THE PROPERTY BOUNDARY.

OWNER/DEVELOPER STATEMENT

I, THE OWNER/DEVELOPER ACCEPT THE CONDITIONS AND RESTRICTIONS AS SET FORTH ON THE FINAL DEVELOPMENT PLAN.

RED ARROW CAPITAL, INC.  
BY: \_\_\_\_\_  
TITLE: \_\_\_\_\_  
ADDRESS: \_\_\_\_\_

Kimley»Horn

© 2021 KIMLEY-HORN AND ASSOCIATES, INC.  
3801 AUTOMATION WAY, SUITE 210  
FORT COLLINS, COLORADO 80525 (303) 228-2300

# BRAKES PLUS

## SITE DEVELOPMENT PLAN

### 2467 MARKSHEFFEL ROAD




SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

#### LEGEND

	PROPERTY LINE
	BUILDING SETBACK LINE
	EASEMENT LINE
	ACCESSIBLE ROUTE
	LANDSCAPE
	PROPOSED ASPHALT STRIPING
	PROPOSED ASPHALT PAVEMENT
	PROPOSED CONCRETE PAVEMENT
	EXISTING CONCRETE PAVEMENT
	PROPOSED SITE LIGHT
	EXISTING STORM SEWER MANHOLE
	PROPOSED CURB INLET

#### IMPROVEMENT NOTES

- 1 PROPOSED SIDEWALK
- 2 PROPOSED ADA CURB RAMP
- 3 PROPOSED ADA PARKING
- 4 PROPOSED ADA SIGNS
- 5 PROPOSED CROSSWALK
- 6 PROPOSED TRASH ENCLOSURE, REF ARCH ELEVATIONS FOR DETAILS
- 7 EXISTING FIRE HYDRANT
- 8 PROPOSED STORM INLET
- 9 PROPOSED LANDSCAPING
- 10 PROPOSED 5' X 5' TRANSFORMER PAD
- 11 PROPOSED LIGHT POLE
- 12 EXISTING CURB RAMP TO REMAIN
- 13 PROPOSED 6" VERTICAL CURB
- 14 EXISTING LIGHT POLE TO REMAIN
- 15 COMM EQUIPMENT, CONTRACTOR TO VERIFY LOCATION AND RELOCATE IF NECESSARY
- 16 PROPOSED MONUMENT SIGN, REFER TO SIGN PACKAGE FOR DETAILS
- 17 EXISTING POWER EQUIPMENT TO REMAIN
- 18 PROPOSED BIKE RACK
- 19 PROPOSED STOP SIGN
- 20 PROPOSED STOP BAR
- 21 EXISTING SIDEWALK

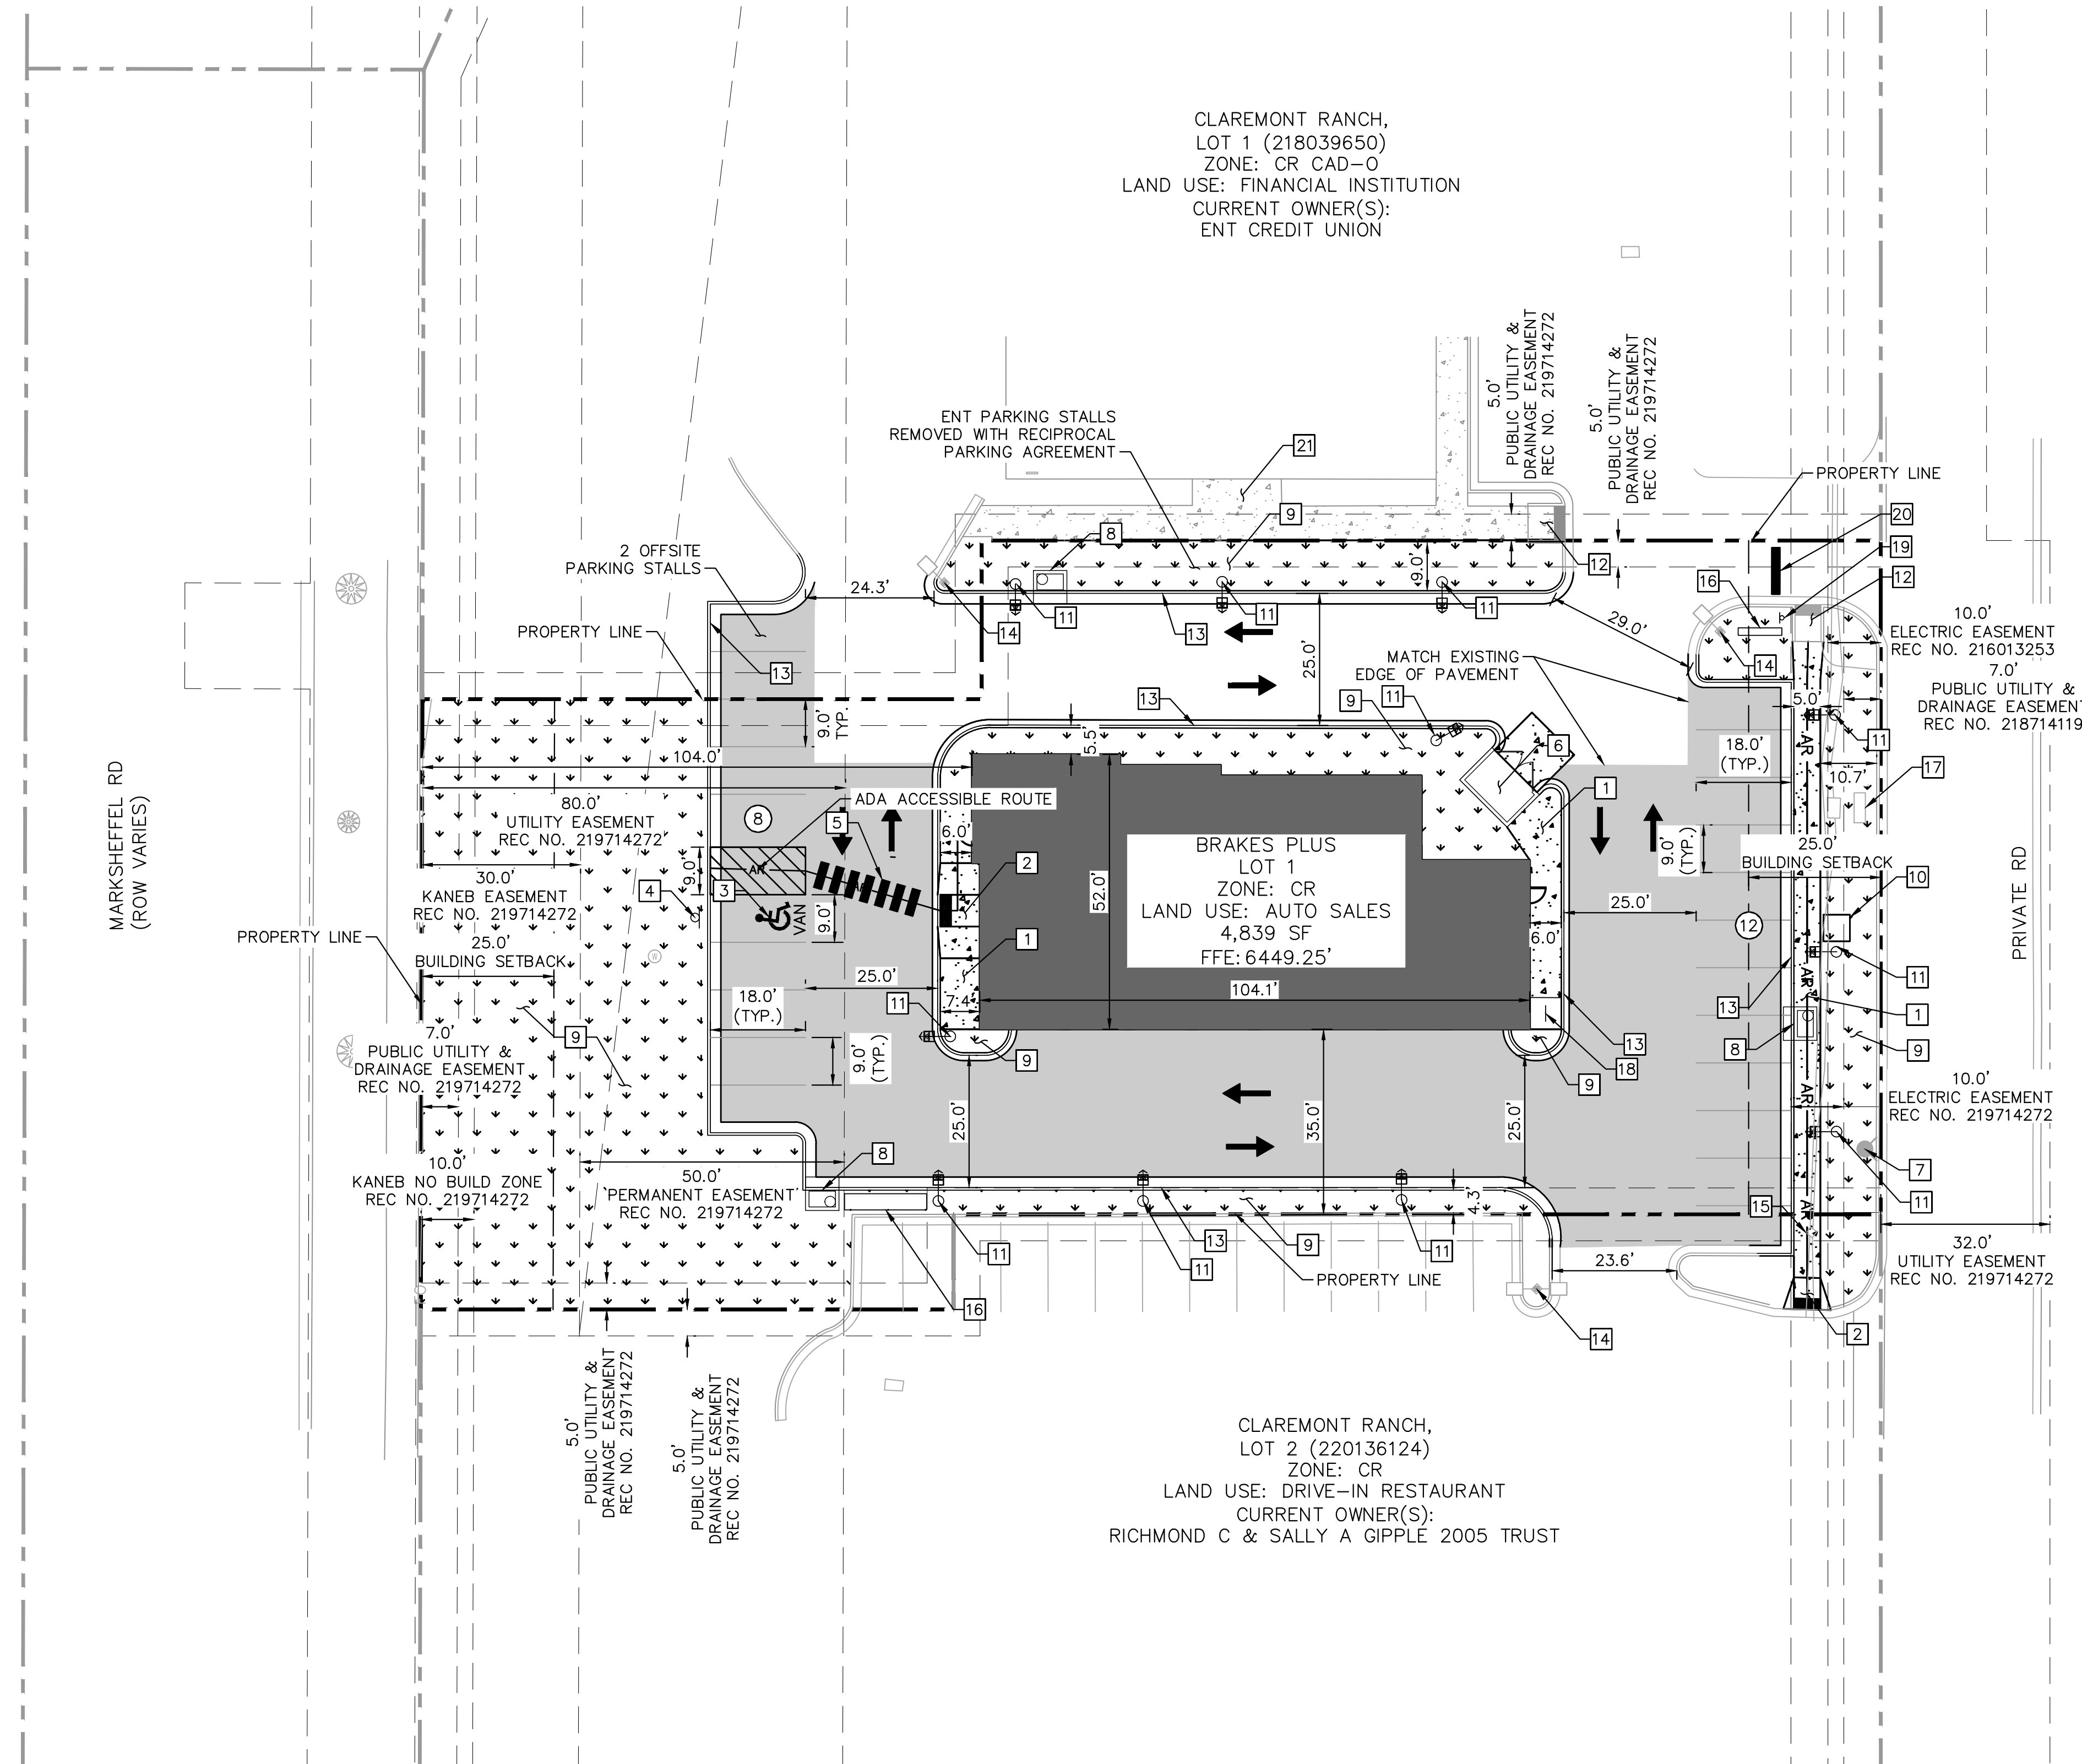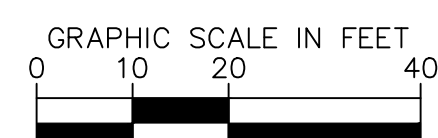

**Kimley»Horn**

© 2021 KIMLEY-HORN AND ASSOCIATES, INC.  
3801 AUTOMATION WAY, SUITE 210  
FORT COLLINS, COLORADO 80525 (303) 228-2300

PPR-21-18  
SITE PLAN  
SHEET 2 OF 10


















K:\DEN\_Civil\09090003\_BP El Paso\CADD\PlanSheets\CD\_SP.dwg, Jul 22, 2021, 9:42am



SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO



CLAREMONT RANCH,  
LOT 1 (216005776)  
ZONE: CR CAD-O  
LAND USE: COMMERCIAL STORE  
CURRENT OWNER(S):  
DILLON COMPANIES INC.

### LEGEND

	PROPERTY LINE
	EXISTING SANITARY SEWER
	EXISTING WATER LINE
	EXISTING GAS LINE
	EXISTING FIBER OPTIC LINE
	EXISTING EASEMENT
	EXISTING ELECTRIC LINE
	EXISTING STORM LINE
	PROPOSED EASEMENT
	PROPOSED LANDSCAPE AREA
	PROPOSED SIDEWALK
	EXISTING SIDEWALK
	PROPOSED SANITARY LINE
	PROPOSED WATER LINE
	PROPOSED ELECTRIC LINE
	PROPOSED GAS LINE
	PROPOSED STORM LINE

- 1 CONNECT TO EXISTING SANITARY LINE WITH WYE
- 2 SANITARY SEWER SERVICE BUILDING CONNECTION
- 3 PROPOSED 4" PVC BUILDING SANITARY SEWER SERVICE AT MINIMUM 2.0% SLOPE (8.0% MAX)
- 4 GREASE INTERCEPT MINIMUM SIZE 1500 GALLONS PER COLORADO SPRINGS UTILITY DETAIL C4-2
- 5 GAS SERVICE
- 6 WATER CONNECTION TO EXISTING MAIN
- 7 3/4" PVC SERVICE LINE
- 8 WATER METER LOCATED INSIDE BUILDING
- 9 EXISTING FIRE HYDRANT
- 10 TRANSFORMER PAD
- 11 TRASH ENCLOSURE PAD
- 12 ELECTRICAL SERVICE
- 13 WATER SERVICE BUILDING CONNECTION
- 14 ELECTRICAL CONNECTION TO BUILDING
- 15 GAS METER
- 16 5' TYPE R STORM INLET
- 17 12" STORM SEWER LINE
- 18 STORM SEWER MANHOLE
- 19 CONNECT TO EXISTING STORM WITH PROPOSED MANHOLE
- 20 CONNECT TO EXISTING STORM MANHOLE
- 21 45° BEND WITH SANITARY SEWER CLEANOUT
- 22 CURB BOX

WATER AND SANITARY SEWER TO BE INSTALLED  
PER CSU STANDARDS WITH CHEROKEE METRO  
DISTRICT EXCEPTIONS.

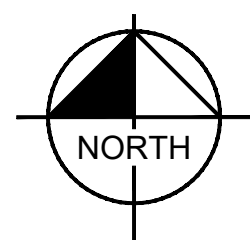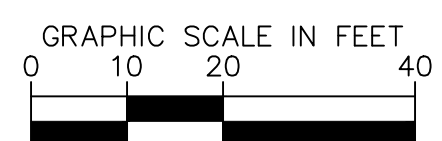

**Kimley»»Horn**

© 2021 KIMLEY-HORN AND ASSOCIATES, INC.  
3801 AUTOMATION WAY, SUITE 210  
FORT COLLINS, COLORADO 80525 (303) 228-2300

PPR-21-18  
UTILITY PLAN  
SHEET 3 OF 10


X:\DEN\_Civil\096908003\_BP El Paso\CADD\PlanSheets\CD\_UT.dwg Jul 22, 2021 9:43am

# BRAKES PLUS

## SITE DEVELOPMENT PLAN


### 2467 MARKSHEFFEL ROAD

SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

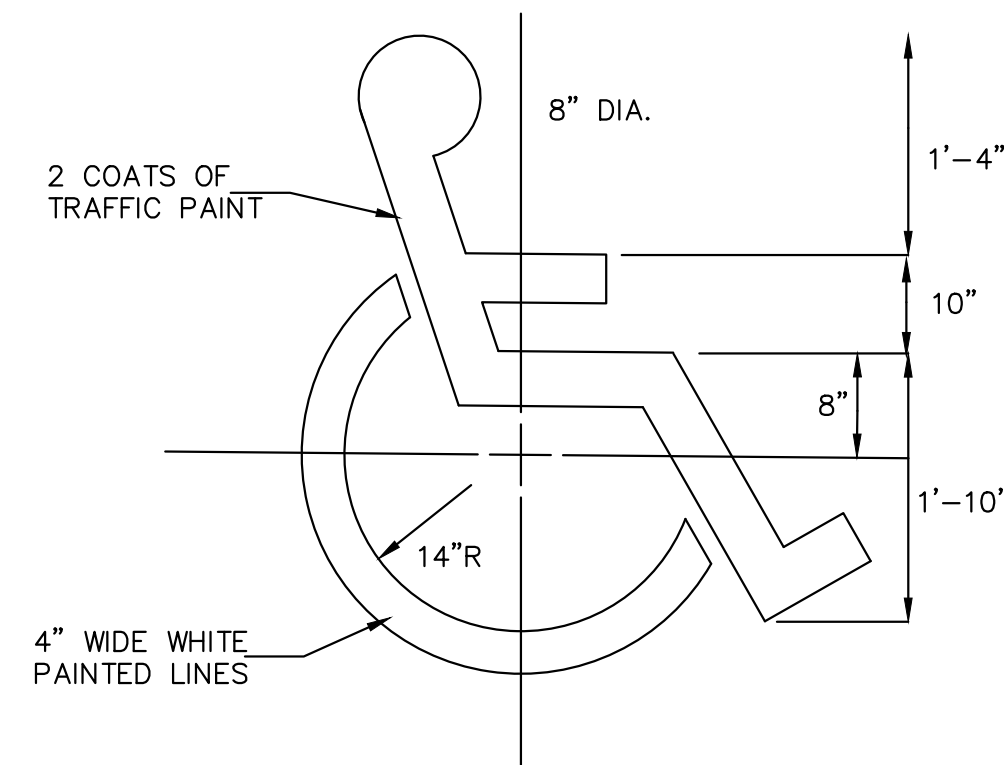


**HANDICAP SYMBOL**

NOT TO SCALE

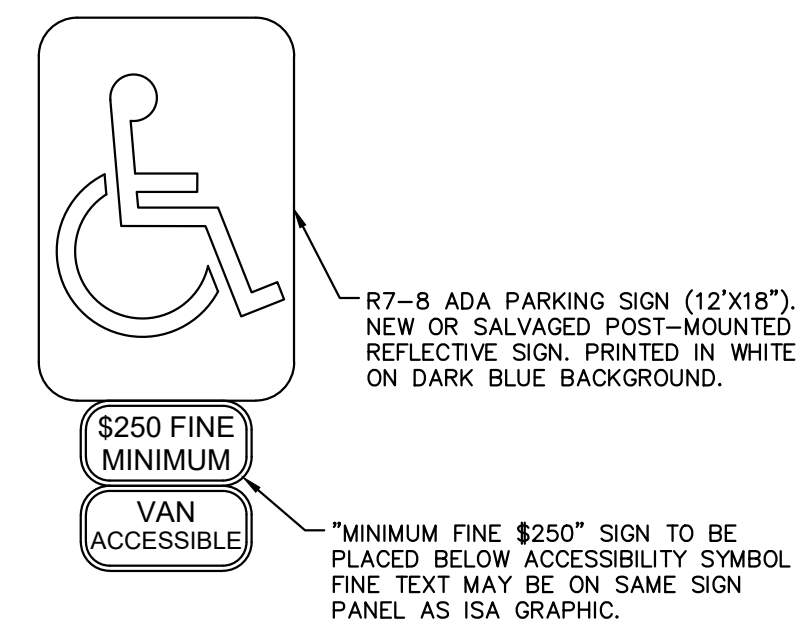


**ADA PARKING SIGN DETAILS**

NOT TO SCALE

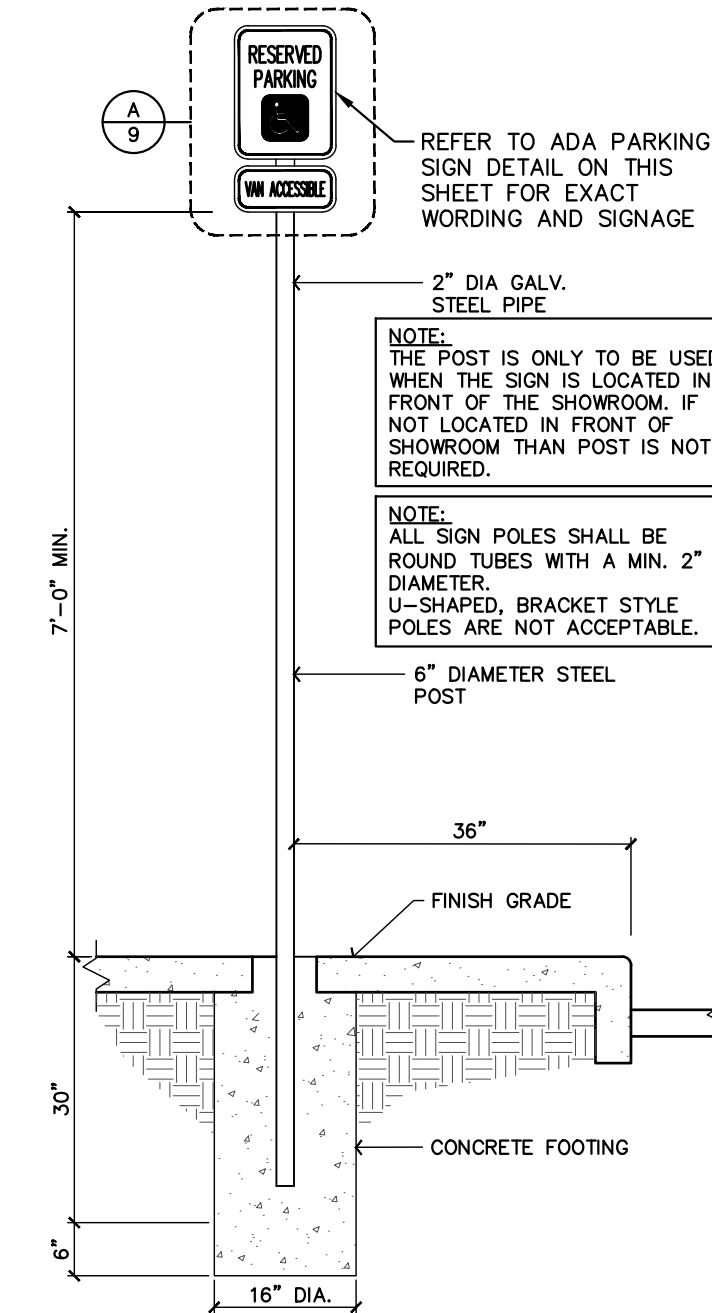

**ACCESSIBLE SIGN POST DETAIL**


NOT TO SCALE

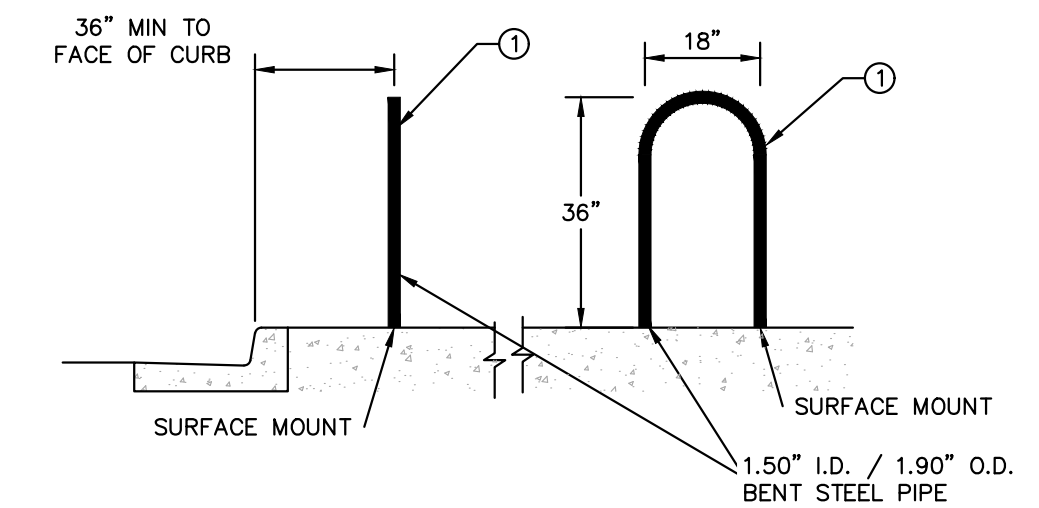

**BIKE RACK DETAIL**

NOT TO SCALE


- NOTES:
1. PLACE ARROW IN CENTER OF TRAFFIC LANE, SEE SITE PLAN.
  2. PAINT ARROW WITH WHITE BEADED REFLECTIVE PAINT. SEE SPECS. FOR ADDITIONAL INFORMATION.
  3. PAINT TWO (2) COATS MINIMUM. LET DRY BETWEEN COATS.

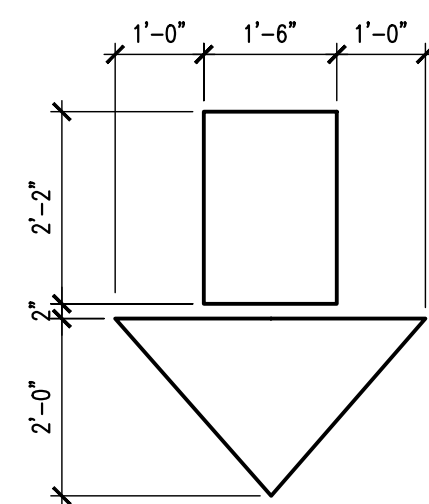

**DIRECTIONAL ARROW STRIPING DETAIL**


NOT TO SCALE

- NOTES:
1. PAINT STOP SIGN & BAR WITH WHITE BEADED REFLECTIVE PAINT. SEE SPECS. FOR ADDITIONAL INFORMATION.
  2. PAINT TWO (2) COATS MINIMUM. LET DRY BETWEEN COATS.

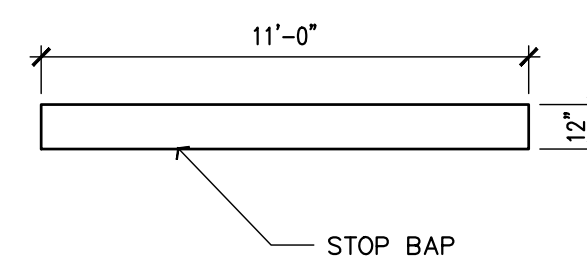



**STOP BAR DETAIL**

NOT TO SCALE

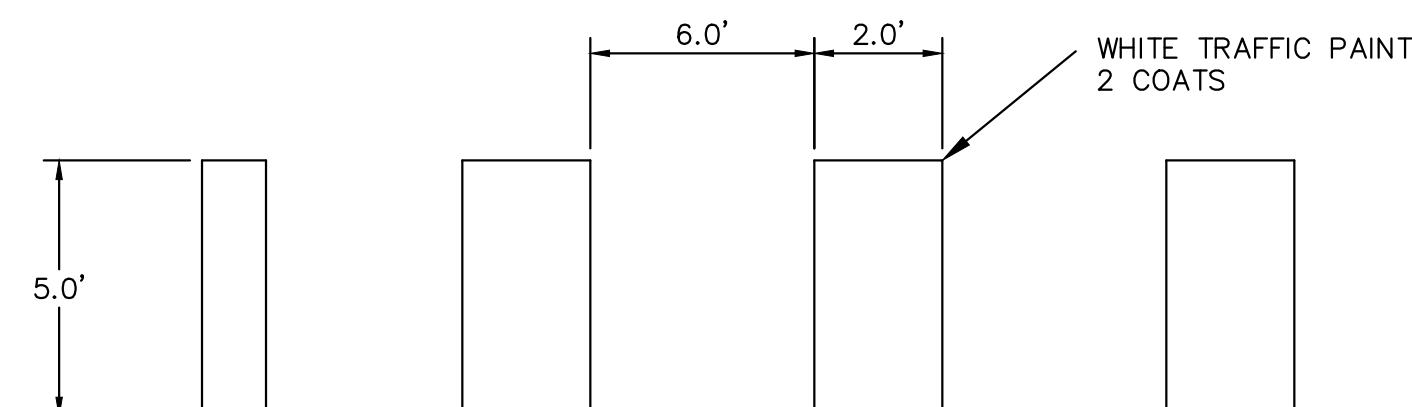

**TYPICAL CROSSWALK DETAIL**

NOT TO SCALE

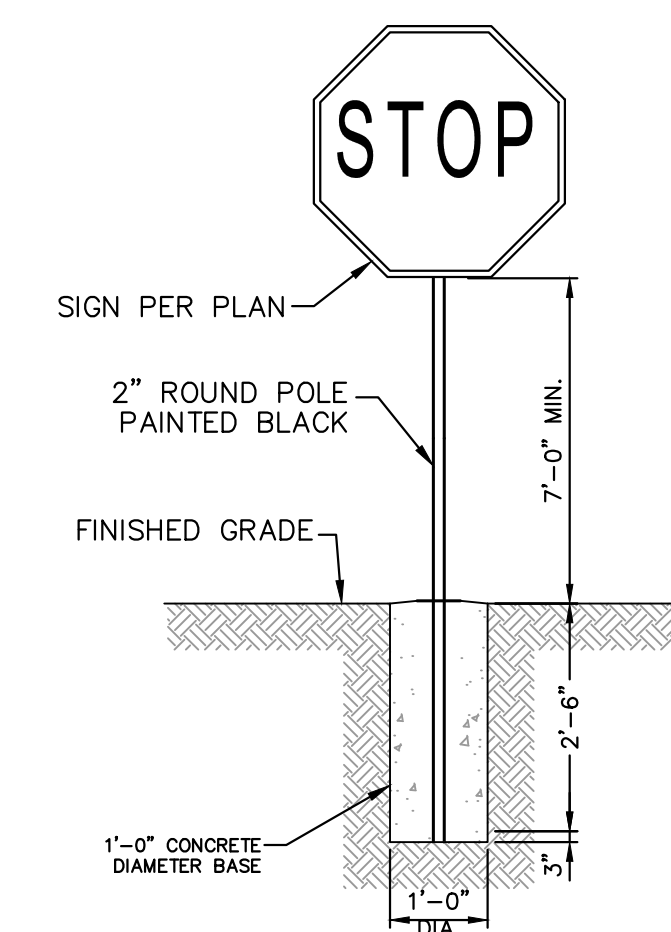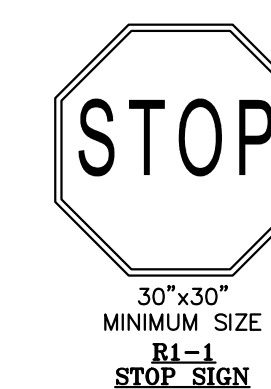


**STOP SIGN DETAIL**

NOT TO SCALE



SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO





BRAKES PLUS  
SITE DEVELOPMENT PLAN  
2467 MARKSHEFFEL ROAD

SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

GENERAL LANDSCAPE SPECIFICATIONS

- A. SCOPE OF WORK
1. THE WORK CONSISTS OF: FURNISHING ALL LABOR, MATERIALS, EQUIPMENT, TOOLS, TRANSPORTATION, AND ANY OTHER APPURTENANCES NECESSARY FOR THE COMPLETION OF THIS PROJECT AS SHOWN ON THE DRAWINGS AND AS SPECIFIED HEREIN.
2. WORK SHALL INCLUDE MAINTENANCE AND WATERING OF ALL CONTRACT PLANTING AREAS UNTIL CERTIFICATION OF ACCEPTANCE BY THE OWNER.
- B. PROTECTION OF EXISTING STRUCTURES
1. ALL EXISTING BUILDINGS, WALKS, WALLS, PAVING, PIPING, OTHER SITE CONSTRUCTION ITEMS, AND PLANTING ALREADY COMPLETED OR ESTABLISHED AND DESIGNATED TO REMAIN SHALL BE PROTECTED FROM DAMAGE BY THE CONTRACTOR UNLESS OTHERWISE SPECIFIED. ALL DAMAGE RESULTING FROM NEGLIGENCE SHALL BE REPAIRED OR REPLACED TO THE SATISFACTION OF THE OWNER, AT NO COST TO THE OWNER.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING ALL NECESSARY BEST MANAGEMENT PRACTICES (BMP) DEVICES ACCORDING TO ALL REGULATORY AGENCY'S STANDARDS THROUGH THE DURATION OF ALL CONSTRUCTION ACTIVITIES.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY MAINTENANCE OF TRAFFIC (MOT) THAT MAY BE REQUIRED FOR THE PROJECT.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UTILITIES, WHETHER PUBLIC OR PRIVATE, PRIOR TO EXCAVATION. THE OWNER AND DESIGN PROFESSIONAL SHALL NOT BE RESPONSIBLE FOR THE ACCURACY AND COMPLETENESS OF ANY SUCH INFORMATION OR DATA. THE CONTRACTOR SHALL HAVE FULL RESPONSIBILITY FOR: REVIEWING AND CHECKING ALL SUCH INFORMATION AND DATA; LOCATING ALL UNDERGROUND FACILITIES DURING CONSTRUCTION; THE SAFETY AND PROTECTION THEREOF; REPAIRING ANY DAMAGE THERETO RESULTING FROM THE WORK. THE COST OF ALL WILL BE CONSIDERED AS HAVING BEEN INCLUDED IN THE CONTRACT PRICE. THE CONTRACTOR SHALL NOTIFY ANY AFFECTED UTILITY COMPANIES OR AGENCIES IN WRITING AT LEAST 48 HOURS PRIOR TO BEGINNING CONSTRUCTION.
- C. PROTECTION OF EXISTING PLANT MATERIALS
1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL UNAUTHORIZED CUTTING OR DAMAGE TO TREES AND SHRUBS EXISTING OR OTHERWISE, CAUSED BY CARELESS EQUIPMENT OPERATION, MATERIAL STOCKPILING, ETC., THIS SHALL INCLUDE COMPACTION BY DRIVING OR PARKING INSIDE THE DRIP-LINE AND SPILLING OIL, GASOLINE, OR OTHER DELETERIOUS MATERIALS WITHIN THE DRIP-LINE. NO MATERIALS SHALL BE BURNED ON SITE. EXISTING TREES KILLED OR DAMAGED SO THAT THEY ARE MISSHAPEN AND/OR UNSIGHTLY SHALL BE REPLACED AT THE COST TO THE CONTRACTOR OF FOUR HUNDRED DOLLARS (\$400) PER CALIPER INCH ON AN ESCALATING SCALE WHICH ADDS AN ADDITIONAL TWENTY (20) PERCENT PER INCH OVER FOUR (4) INCHES CALIPER AS FIXED AND AGREED LIQUIDATED DAMAGES. CALIPER SHALL BE MEASURED SIX (6) INCHES ABOVE GROUND LEVEL FOR TREES UP TO AND INCLUDING FOUR (4) INCHES IN CALIPER AND TWELVE (12) INCHES ABOVE GROUND LEVEL FOR TREES OVER FOUR (4) INCHES IN CALIPER.
2. SEE TREE MITIGATION PLAN AND NOTES, IF APPLICABLE.
- D. MATERIALS
1. GENERAL
- MATERIAL SAMPLES LISTED BELOW SHALL BE SUBMITTED FOR APPROVAL, ON SITE OR AS DETERMINED BY THE OWNER. UPON APPROVAL, DELIVERY OF MATERIALS MAY COMMENCE.
- | MATERIAL    | SAMPLE SIZE                                    |
|-------------|--|
| MULCH       | ONE (1) CUBIC FOOT                             |
| TOPSOIL MIX | ONE (1) CUBIC FOOT                             |
| PLANTS      | ONE (1) OF EACH VARIETY (OR TAGGED IN NURSERY) |
2. PLANT MATERIALS
- a. FURNISH NURSERY-GROWN PLANTS TRUE TO GENUS, SPECIES, VARIETY, CULTIVAR, STEM FORM, SHEARING, AND OTHER FEATURES INDICATED IN PLANT SCHEDULE SHOWN ON DRAWINGS AND COMPLYING WITH ANSI Z60.1 AND THE COLORADO NURSERY ACT, AND WITH HEALTHY ROOT SYSTEMS DEVELOPED BY TRANSPLANTING OR ROOT PRUNING. PROVIDE WELL-SHAPED, FULLY BRANCHED, HEALTHY, VIGOROUS STOCK, DENSELY FOLIATED WHEN IN LEAF AND FREE OF DISEASE, PESTS, EGGS, LARVAE, AND DEFECTS SUCH AS KNOTS, SUN SCALD, INJURIES, ABRASIONS, AND DISFIGUREMENT.
- b. TREES FOR PLANTING IN ROWS SHALL BE UNIFORM IN SIZE AND SHAPE.
- c. NO SUBSTITUTIONS SHALL BE MADE WITHOUT WRITTEN PERMISSION FROM THE PROJECT LANDSCAPE ARCHITECT. ANY ROW TREES MUST BE APPROVED BY OFFICE OF THE CITY FORESTER.
- d. PROVIDE PLANTS OF SIZES, GRADES, AND BALL OR CONTAINER SIZES COMPLYING WITH ANSI Z60.1 AND COLORADO NURSERY ACT FOR TYPES AND FORM OF PLANTS REQUIRED. PLANTS OF A LARGER SIZE MAY BE USED IF ACCEPTABLE TO PROJECT LANDSCAPE ARCHITECT WITH A PROPORTIONATE INCREASE IN SIZE OF ROOTS OR BALLS.
- e. PLANTS SHALL BE SUBJECT TO INSPECTION AND APPROVAL AT THE PLACE OF GROWTH, OR UPON DELIVERY TO THE SITE, AS DETERMINED BY THE OWNER, FOR QUALITY, SIZE, AND VARIETY. SUCH APPROVAL SHALL NOT IMPAIR THE RIGHT OF INSPECTION AND REJECTION AT THE SITE DURING PROGRESS OF THE WORK OR AFTER COMPLETION FOR SIZE AND CONDITION OF ROOT BALLS OR ROOTS, LATENT DEFECTS OR INJURIES. REJECTED PLANTS SHALL BE REMOVED IMMEDIATELY FROM THE SITE. NOTICE REQUESTING INSPECTION SHALL BE SUBMITTED IN WRITING BY THE CONTRACTOR AT LEAST ONE (1) WEEK PRIOR TO ANTICIPATED DATE.
- f. TREES WITH DAMAGED, CROOKED, OR MULTIPLE LEADERS, TIGHT VERTICAL BRANCHES WHERE BARK IS SQUEEZED BETWEEN TWO BRANCHES OR BETWEEN BRANCH AND TRUNK ("INCLUDED BARK"); CROSSING TRUNKS; CUT-OFF LIMBS MORE THAN ½ INCH (19 MM) IN DIAMETER; OR WITH STEM GIRDLING ROOTS WILL BE REJECTED.
- g. FURNISH TREES AND SHRUBS WITH ROOTS BALLS MEASURED FROM TOP OF ROOT BALL, WHICH SHALL BEGIN AT ROOT FLARE ACCORDING TO ANSI Z60.1 AND COLORADO NURSERY ACT. ROOT FLARE SHALL BE VISIBLE BEFORE PLANTING.
- h. LABEL AT LEAST ONE PLANT OF EACH VARIETY, SIZE, AND CALIPER WITH A SECURELY ATTACHED, WATERPROOF TAG BEARING LEGIBLE DESIGNATION OF COMMON NAME AND FULL SCIENTIFIC NAME, INCLUDING GENUS AND SPECIES. INCLUDE NOMENCLATURE FOR HYBRID, VARIETY, OR CULTIVAR, IF APPLICABLE FOR THE PLANT AS SHOWN ON DRAWINGS.
- i. IF FORMAL ARRANGEMENTS OR CONSECUTIVE ORDER OF PLANTS IS SHOWN ON DRAWINGS, SELECT STOCK FOR UNIFORM HEIGHT AND SPREAD, AND NUMBER THE LABELS TO ASSURE SYMMETRY IN PLANTING.
- E. SOIL MIXTURE
1. CONTRACTOR SHALL TEST EXISTING SOIL AND AMEND AS NECESSARY IN ACCORDANCE WITH THE GUIDELINES BELOW:
2. SOIL MIXTURE SHALL CONSIST OF TWO PARTS OF TOPSOIL AND ONE PART SAND, AS DESCRIBED BELOW. CONTRACTOR TO SUBMIT SAMPLES AND PH TESTING RESULTS OF SOIL MIXTURE FOR OWNER'S REPRESENTATIVE APPROVAL PRIOR TO PLANT INSTALLATION OPERATIONS COMMENCE.
- a. TOPSOIL FOR USE IN PREPARING SOIL MIXTURE FOR BACKFILLING PLANT OPENINGS SHALL BE FERTILE, FRIABLE, AND OF A LOAMY CHARACTER; REASONABLY FREE OF SUBSOIL, CLAY LUMPS, BRUSH WEEDS AND OTHER LITTER; FREE OF ROOTS, STUMPS, STONES LARGER THAN 2" IN ANY DIRECTION, AND OTHER EXTRANEIOUS OR TOXIC MATTER HARMFUL TO PLANT GROWTH. IT SHALL CONTAIN THREE (3) TO FIVE (5) PERCENT DECOMPOSED ORGANIC MATTER, HAVE A PH BETWEEN 5.5 AND 6.0, AND SOLUBLE SALTS LESS THAN 3.0 MMHOS/CM. SUBMIT SOIL SAMPLE AND PH TESTING RESULTS FOR APPROVAL.
- b. SAND SHALL BE COARSE, CLEAN, WELL-DRAINING, NATIVE SAND.
3. TREES SHALL BE PLANTED IN THE EXISTING NATIVE SOIL ON SITE, UNLESS DETERMINED TO BE UNSUITABLE - AT WHICH POINT THE CONTRACTOR SHALL CONTACT THE PROJECT LANDSCAPE ARCHITECT TO DISCUSS ALTERNATE RECOMMENDATION PRIOR TO PLANTING.
- F. WATER
1. WATER NECESSARY FOR PLANTING AND MAINTENANCE SHALL BE OF SATISFACTORY QUALITY TO SUSTAIN ADEQUATE PLANT GROWTH AND SHALL NOT CONTAIN HARMFUL, NATURAL OR MAN-MADE ELEMENTS DETRIMENTAL TO PLANTS. WATER MEETING THE ABOVE STANDARD SHALL BE OBTAINED ON THE SITE FROM THE OWNER, IF AVAILABLE, AND THE CONTRACTOR SHALL BE RESPONSIBLE TO MAKE ARRANGEMENTS FOR ITS USE BY HIS TANKS, HOSES, SPRINKLERS, ETC., IF SUCH WATER IS NOT AVAILABLE AT THE SITE, THE CONTRACTOR SHALL PROVIDE SATISFACTORY WATER FROM SOURCES OFF THE SITE AT NO ADDITIONAL COST TO THE OWNER.

\* WATERING/IRRIGATION RESTRICTIONS MAY APPLY - REFER TO PROPERTY'S JURISDICTIONAL AUTHORITY.



- G. FERTILIZER
1. CONTRACTOR SHALL PROVIDE FERTILIZER APPLICATION SCHEDULE TO OWNER, AS APPLICABLE TO SOIL TYPE, PLANT INSTALLATION TYPE, AND SITE'S PROPOSED USE. SUGGESTED FERTILIZER TYPES SHALL BE ORGANIC OR OTHERWISE NATURALLY-DERIVED.
- \* FERTILIZER RESTRICTIONS MAY APPLY - REFER TO PROPERTY'S JURISDICTIONAL AUTHORITY.
- H. MULCH
1. MULCH MATERIAL SHALL BE MOISTENED AT THE TIME OF APPLICATION TO PREVENT WIND DISPLACEMENT, AND APPLIED AT A DEPTH OF THREE (3) INCHES. CLEAR MULCH FROM EACH PLANT'S CROWN (BASE) OR AS SHOWN IN PLANTING DETAILS. UNLESS OTHERWISE NOTED ON PLANS, MULCH SHALL BE DOUBLE SHREDDED HARDWOOD MULCH DARK BROWN FINES BY MOUNTAIN HIGH SAVATREE OR APPROVED EQUAL. DYED MULCH IS NOT ACCEPTABLE. SUBMIT SAMPLES TO PROJECT LANDSCAPE ARCHITECT FOR APPROVAL. MULCH SHALL BE PROVIDED OVER THE ENTIRE AREA OF EACH SHRUB BED, GROUND COVER, VINE BED, AND TREE RING (6" MINIMUM) PLANTED UNDER THIS CONTRACT, AS WELL AS FOR ANY EXISTING LANDSCAPE AREAS AS SHOWN ON PLANS.
- I. DIGGING AND HANDLING
1. ALL TREES SPECIFIED SHALL BE BALLED AND BURLAPPED (B&B) UNLESS OTHERWISE APPROVED BY PROJECT LANDSCAPE ARCHITECT.
2. PROTECT ROOTS OR ROOT BALLS OF PLANTS AT ALL TIMES FROM SUN, DRYING WINDS, WATER AND FREEZING, AS NECESSARY UNTIL PLANTING. PLANT MATERIALS SHALL BE ADEQUATELY PACKED TO PREVENT DAMAGE DURING TRANSIT. TREES TRANSPORTED MORE THAN TEN (10) MILES OR WHICH ARE NOT PLANTED WITHIN THREE (3) DAYS OF DELIVERY TO THE SITE SHALL BE SPRAYED WITH AN ANTITRANSPIRANT PRODUCT ("WILT-PRUF" OR EQUAL) TO MINIMIZE TRANSPIRATIONAL WATER LOSS.
3. B&B AND FIELD GROWN (FG) PLANTS SHALL BE DUG WITH FIRM, NATURAL BALLS OF SOIL OF SUFFICIENT SIZE TO ENCOMPASS THE FIBROUS AND FEEDING ROOTS OF THE PLANTS. NO PLANTS MOVED WITH A ROOT BALL SHALL BE PLANTED IF THE BALL IS CRACKED OR BROKEN. PLANTS SHALL NOT BE HANDLED BY STEMS.
- J. CONTAINER GROWN STOCK
1. ALL CONTAINER GROWN MATERIAL SHALL BE HEALTHY, VIGOROUS, WELL-ROOTED PLANTS ESTABLISHED IN THE CONTAINER IN WHICH THEY ARE SOLD. THE PLANTS SHALL HAVE TOPS WHICH ARE OF GOOD QUALITY AND ARE IN A HEALTHY GROWING CONDITION.
2. AN ESTABLISHED CONTAINER GROWN PLANT SHALL BE TRANSPLANTED INTO A CONTAINER AND GROWN IN THAT CONTAINER SUFFICIENTLY LONG FOR THE NEW FIBROUS ROOTS TO HAVE DEVELOPED SO THAT THE ROOT MASS WILL RETAIN ITS SHAPE AND HOLD TOGETHER WHEN REMOVED FROM THE CONTAINER. CONTAINER GROWN STOCK SHALL NOT BE HANDLED BY THEIR STEMS.
3. ROOT BOUND PLANTS ARE NOT ACCEPTABLE AND WILL BE REJECTED.
- K. MATERIALS LIST
1. QUANTITIES NECESSARY TO COMPLETE THE WORK ON THE DRAWINGS SHALL BE FURNISHED BY THE CONTRACTOR. QUANTITY ESTIMATES HAVE BEEN MADE CAREFULLY, BUT THE LANDSCAPE ARCHITECT OR OWNER ASSUMES NO LIABILITY FOR OMISSIONS OR ERRORS. SHOULD A DISCREPANCY OCCUR BETWEEN THE PLANS AND THE PLANT LIST QUANTITY, THE PLANT LIST GOVERN. ALL DIMENSIONS AND/OR SIZES SPECIFIED SHALL BE THE MINIMUM ACCEPTABLE SIZE.
- L. FINE GRADING
1. FINE GRADING UNDER THIS CONTRACT SHALL CONSIST OF FINAL FINISHED GRADING OF LAWN AND PLANTING AREAS THAT HAVE BEEN DISTURBED DURING CONSTRUCTION.
2. THE CONTRACTOR SHALL FINE GRADE THE LAWN AND PLANTING AREAS TO BRING THE ROUGH GRADE UP TO FINAL FINISHED GRADE ALLOWING FOR THICKNESS OF SOD AND/OR MULCH DEPTH.
3. ALL PLANTING AREAS SHALL BE GRADED AND MAINTAINED FOR POSITIVE DRAINAGE TO SURFACE/SUBSURFACE STORM DRAIN SYSTEMS. AREAS ADJACENT TO BUILDINGS SHALL SLOPE AWAY FROM THE BUILDINGS. REFER TO CIVIL ENGINEER'S PLANS FOR FINAL GRADES, IF APPLICABLE.
- M. PLANTING PROCEDURES
1. THE CONTRACTOR SHALL CLEAN WORK AND SURROUNDING AREAS OF ALL RUBBISH OR OBJECTIONABLE MATTER DAILY. ALL MORTAR, CEMENT, BUILDING MATERIALS, AND TOXIC MATERIAL SHALL BE COMPLETELY REMOVED FROM PLANTING AREAS. THESE MATERIALS SHALL NOT BE MIXED WITH THE SOIL. SHOULD THE CONTRACTOR FIND SUCH SOIL CONDITIONS IN PLANTING AREAS WHICH WILL ADVERSELY AFFECT THE PLANT GROWTH, THE CONTRACTOR SHALL IMMEDIATELY CALL IT TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE. FAILURE TO DO SO BEFORE PLANTING SHALL MAKE THE CORRECTIVE MEASURES THE RESPONSIBILITY OF THE CONTRACTOR.
2. VERIFY LOCATIONS OF ALL UTILITIES, CONDUITS, SUPPLY LINES AND CABLES, INCLUDING BUT NOT LIMITED TO: ELECTRIC, GAS LINES AND TANKS, WATER, SANITARY SEWER, STORMWATER SYSTEMS, CABLE, AND TELEPHONE. PROPERLY MAINTAIN AND PROTECT EXISTING UTILITIES. CALL COLORADO (811) TO LOCATE UTILITIES AT LEAST 48 HOURS PRIOR TO CONSTRUCTION.
3. CONTRACTOR IS RESPONSIBLE TO REMOVE ALL EXISTING AND IMPORTED LIMEROCK AND LIMEROCK SUB-BASE FROM ALL PLANTING AREAS TO A MINIMUM DEPTH OF 36" OR TO NATIVE SOIL. CONTRACTOR IS RESPONSIBLE TO BACKFILL THESE PLANTING AREAS TO ROUGH FINISHED GRADE WITH CLEAN TOPSOIL FROM AN ON-SITE SOURCE OR AN IMPORTED SOURCE. IF LIMEROCK OR OTHER ADVERSE CONDITIONS OCCUR IN PLANTED AREAS AFTER 36" DEEP EXCAVATION BY THE CONTRACTOR, AND POSITIVE DRAINAGE CAN NOT BE ACHIEVED, CONTRACTOR SHALL UTILIZE POOR DRAINAGE CONDITION PLANTING DETAIL.
4. FURNISH NURSERY'S CERTIFICATE OF COMPLIANCE WITH ALL REQUIREMENTS AS SPECIFIED HEREIN. INSPECT AND SELECT PLANT MATERIALS BEFORE PLANTS ARE DUG AT NURSERY OR GROWING SITE.
5. COMPLY WITH APPLICABLE FEDERAL, STATE, COUNTY, AND LOCAL REGULATIONS GOVERNING LANDSCAPE MATERIALS AND WORK. UPON ARRIVAL AT THE SITE, PLANTS SHALL BE THOROUGHLY WATERED AND PROPERLY MAINTAINED UNTIL PLANTED. PLANTS STORED ON-SITE SHALL NOT REMAIN UNPLANTED OR APPROPRIATELY HEALED IN FOR A PERIOD EXCEEDING TWENTY-FOUR (24) HOURS. AT ALL TIMES WORKMANLIKE METHODS CUSTOMARY IN ACCEPTED HORTICULTURAL PRACTICES AS USED IN THE TRADE SHALL BE EXERCISED.
6. WORK SHALL BE COORDINATED WITH OTHER TRADES TO PREVENT CONFLICTS. COORDINATE PLANTING WITH IRRIGATION WORK TO ASSURE AVAILABILITY OF WATER AND PROPER LOCATION OF IRRIGATION APPURTENANCES AND PLANTS.
7. ALL PLANTING OPENINGS SHALL BE EXCAVATED TO SIZE AND DEPTH IN ACCORDANCE WITH ANSI Z60.1-2014 AMERICAN STANDARD FOR NURSERY STOCK.
8. TEST ALL TREE OPENINGS WITH WATER BEFORE PLANTING TO ASSURE PROPER DRAINAGE PERCOLATION IS AVAILABLE. NO ALLOWANCE WILL BE MADE FOR LOST PLANTS DUE TO IMPROPER DRAINAGE. IF POOR DRAINAGE EXISTS, UTILIZE "POOR DRAINAGE CONDITION" PLANTING DETAIL.
9. TREES SHALL BE SET PLUMB AND HELD IN POSITION UNTIL THE PLANTING MIXTURE HAS BEEN FLUSHED INTO PLACE WITH A SLOW, FULL HOSE STREAM. ALL PLANTING SHALL BE PERFORMED BY PERSONNEL FAMILIAR WITH PLANTING PROCEDURES AND UNDER THE SUPERVISION OF A QUALIFIED LANDSCAPE FOREMAN.
10. PRIOR TO EXCAVATION OF TREE OPENINGS, AN AREA EQUAL TO TWO TIMES THE DIAMETER OF THE ROOT BALL SHALL BE ROTO-TILLED TO A DEPTH EQUAL TO THE DEPTH OF THE ROOT BALL.
11. EXCAVATION OF TREE OPENINGS SHALL BE PERFORMED USING EXTREME CARE TO AVOID DAMAGE TO SURFACE AND SUBSURFACE ELEMENTS SUCH AS UTILITIES OR HARDSCAPE ELEMENTS, FOOTERS AND PREPARED SUB-BASES.
12. IN CONTINUOUS SHRUB AND GROUND COVER BEDS, THE ROTO-TILLED PERIMETER SHOULD EXTEND TO A DISTANCE OF ONE FOOT BEYOND THE DIAMETER OF A SINGLE ROOT BALL. THE BED SHALL BE TILLED TO A DEPTH EQUAL TO THE ROOT BALL DEPTH PLUS 6".
13. TREE OPENINGS FOR WELL DRAINED SOILS SHALL BE DUG SO THAT THE BOTTOM OF THE ROOT BALL WILL REST ON UNDISTURBED SOIL AND THE TOP OF THE ROOT BALL WILL BE FLUSH WITH FINISH GRADE. IN POORLY DRAINED SOILS THE TREE OPENING SHALL BE DUG SO THAT THE ROOT BALL RESTS ON UNDISTURBED SOIL AND THE TOP OF THE ROOT BALL IS 1" ABOVE FINISH GRADE. PLANT PIT WALLS SHALL BE SCARIFIED PRIOR TO PLANT INSTALLATION.
14. TAKE ALL NECESSARY PRECAUTIONS TO AVOID DAMAGE TO BUILDINGS AND BUILDING STRUCTURES WHILE INSTALLING TREES.
15. SOIL MIXTURE SHALL BE AS SPECIFIED IN SECTION "E".

16. TREES AND SHRUBS SHALL BE SET STRAIGHT AT AN ELEVATION THAT, AFTER SETTLEMENT, THE PLANT CROWN WILL STAND ONE (1) TO TWO (2) INCHES ABOVE GRADE. EACH PLANT SHALL BE SET IN THE CENTER OF THE PIT. SOIL MIXTURE SHALL BE BACK FILLED, THOROUGHLY TAMPED AROUND THE BALL, AND SETTLED BY WATER (AFTER TAMPING).
17. AMEND PINE AND OAK PLANT OPENINGS WITH ECTOMYCORRHIZAL SOIL APPLICATION PER MANUFACTURER'S RECOMMENDATION. ALL OTHER PLANT OPENINGS SHALL BE AMENDED WITH ENDOMYCORRHIZAL SOIL APPLICATION PER MANUFACTURER'S RECOMMENDATION. PROVIDE PRODUCT INFORMATION SUBMITTAL PRIOR TO INOCULATION.
18. FILL HOLE WITH SOIL MIXTURE, MAKING CERTAIN ALL SOIL IS SATURATED. TO DO THIS, FILL HOLE WITH WATER AND ALLOW TO SOAK MINIMUM TWENTY (20) MINUTES, STIRRING IF NECESSARY TO GET SOIL THOROUGHLY WET. PACK LIGHTLY WITH FEET. ADD MORE WET SOIL MIXTURE. DO NOT COVER TOP OF BALL WITH SOIL MIXTURE.
19. ALL BURLAP, ROPE, WIRES, BASKETS, ETC., SHALL BE REMOVED FROM THE SIDES AND TOPS OF BALLS, BUT NO BURLAP SHALL BE PULLED FROM UNDERNEATH.
20. TREES SHALL BE PRUNED, IN ACCORDANCE WITH ANSI A-300, TO PRESERVE THE NATURAL CHARACTER OF THE PLANT. ALL SOFT WOOD OR SUCKER GROWTH AND ALL BROKEN OR BADLY DAMAGED BRANCHES SHALL BE REMOVED WITH A CLEAN CUT. ALL PRUNING TO BE PERFORMED BY CERTIFIED ARBORIST.
21. SHRUBS AND GROUND COVER PLANTS SHALL BE EVENLY SPACED IN ACCORDANCE WITH THE DRAWINGS AND AS INDICATED ON THE PLANT LIST. MATERIALS INSTALLED SHALL MEET MINIMUM SPECIMEN REQUIREMENTS OR QUANTITIES SHOWN ON PLANS, WHICHEVER IS GREATER. CULTIVATE ALL PLANTING AREAS TO A MINIMUM DEPTH OF 6", REMOVE AND DISPOSE ALL DEBRIS. MIX TOP 4" THE PLANTING SOIL MIXTURE AS SPECIFIED IN SECTION E. THOROUGHLY WATER ALL PLANTS AFTER INSTALLATION.
22. TREE GUYING AND BRACING SHALL BE INSTALLED BY THE CONTRACTOR IN ACCORDANCE WITH THE PLANS TO INSURE STABILITY AND MAINTAIN TREES IN AN UPRIGHT POSITION. IF THE CONTRACTOR AND OWNER DECIDE TO WAIVE THE TREE GUYING AND BRACING, THE OWNER SHALL NOTIFY THE PROJECT LANDSCAPE ARCHITECT IN WRITING AND AGREE TO INDEMNIFY AND HOLD HARMLESS THE PROJECT LANDSCAPE ARCHITECT IN THE EVENT UNSUPPORTED TREES PLANTED UNDER THIS CONTRACT FALL AND DAMAGE PERSON OR PROPERTY.
23. ALL PLANT BEDS SHALL BE KEPT FREE OF NOXIOUS WEEDS UNTIL FINAL ACCEPTANCE OF WORK. IF DIRECTED BY THE OWNER, "TROUPLUP" SHALL BE APPLIED FOR WEED CONTROL BY QUALIFIED PERSONNEL TO ALL PLANTING AREAS. SPOT APPLICATIONS PER MANUFACTURER'S RECOMMENDATIONS. PRIOR TO FINAL INSPECTION, TREAT ALL PLANTING BEDS WITH AN APPROVED PRE-EMERGENT HERBICIDE AT AN APPLICATION RATE RECOMMENDED BY THE MANUFACTURER, (AS ALLOWED BY JURISDICTIONAL AUTHORITY).
- N. LAWN SODDING
1. THE WORK CONSISTS OF LAWN BED PREPARATION, SOIL PREPARATION, AND SODDING COMPLETE, IN STRICT ACCORDANCE WITH THE SPECIFICATIONS AND THE APPLICABLE DRAWINGS TO PRODUCE A TURF GRASS LAWN ACCEPTABLE TO THE OWNER.
2. ALL AREAS THAT ARE TO BE SODDED SHALL BE CLEARED OF ANY ROUGH GRASS, WEEDS, AND DEBRIS BY MEANS OF A SOD CUTTER TO A DEPTH OF THREE (3) INCHES, AND THE GROUND BROUGHT TO AN EVEN GRADE. THE ENTIRE SURFACE SHALL BE ROLLED WITH A ROLLER WEIGHING NOT MORE THAN ONE-HUNDRED (100) POUNDS PER FOOT OF WIDTH. DURING THE ROLLING, ALL DEPRESSIONS CAUSED BY SETTLEMENT SHALL BE FILLED WITH ADDITIONAL SOIL, AND THE SURFACE SHALL BE REGRADED AND ROLLED UNTIL PRESENTING A SMOOTH AND EVEN FINISH TO THE REQUIRED GRADE.
3. PREPARE LOOSE BED FOUR (4) INCHES DEEP. HAND RAKE UNTIL ALL BUMPS AND DEPRESSIONS ARE REMOVED. WET PREPARED AREA THOROUGHLY.
4. SODDING
- a. THE CONTRACTOR SHALL SOD ALL AREAS THAT ARE NOT PAVED OR PLANTED AS DESIGNATED ON THE DRAWINGS WITHIN THE CONTRACT LIMITS, UNLESS SPECIFICALLY NOTED OTHERWISE.
- b. SOD PANELS SHALL BE LAID TIGHTLY TOGETHER SO AS TO MAKE A SOLID SODDED LAWN AREA. SOD SHALL BE LAID UNIFORMLY AGAINST THE EDGES OF ALL CURBS AND OTHER HARDSCAPE ELEMENTS, PAVED AND PLANTED AREAS. ADJACENT TO BUILDINGS, A 24 INCH STONE MULCH STRIP SHALL BE PROVIDED. IMMEDIATELY FOLLOWING SOD LAYING, THE LAWN AREAS SHALL BE ROLLED WITH A LAWN ROLLER CUSTOMARILY USED FOR SUCH PURPOSES, AND THEN THOROUGHLY IRRIGATED. IF, IN THE OPINION OF THE OWNER, TOP-DRESSING IS NECESSARY AFTER ROLLING TO FILL THE VOIDS BETWEEN THE SOD PANELS AND TO EVEN OUT INCONSISTENCIES IN THE SOD, CLEAN SAND, AS APPROVED BY THE OWNER'S REPRESENTATIVE, SHALL BE UNIFORMLY SPREAD OVER THE ENTIRE SURFACE OF THE SOD AND THOROUGHLY WATERED IN. FERTILIZE INSTALLED SOD AS ALLOWED BY PROPERTY'S JURISDICTIONAL AUTHORITY.
5. DURING DELIVERY, PRIOR TO, AND DURING THE PLANTING OF THE LAWN AREAS, THE SOD PANELS SHALL AT ALL TIMES BE PROTECTED FROM EXCESSIVE DRYING AND UNNECESSARY EXPOSURE OF THE ROOTS TO THE SUN. ALL SOD SHALL BE STACKED SO AS NOT TO BE DAMAGED BY SWEATING OR EXCESSIVE HEAT AND MOISTURE.
6. LAWN MAINTENANCE
- a. WITHIN THE CONTRACT LIMITS, THE CONTRACTOR SHALL PRODUCE A DENSE, WELL ESTABLISHED LAWN. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR AND RE-SODDING OF ALL ERODED, SUNKEN OR BARE SPOTS (LARGER THAN 12"x12" UNTIL CERTIFICATION OF ACCEPTANCE BY THE OWNER'S REPRESENTATIVE. REPAIRED SODDING SHALL BE ACCOMPLISHED AS IN THE ORIGINAL WORK, INCLUDING REGRAIDING IF NECESSARY.
- b. CONTRACTOR SHALL BE RESPONSIBLE FOR ESTABLISHING AND MAINTAINING SOD/LAWN UNTIL ACCEPTANCE BY THE OWNER'S REPRESENTATIVE. PRIOR TO AND UPON ACCEPTANCE, CONTRACTOR TO PROVIDE WATERING/IRRIGATION SCHEDULE TO OWNER, OBSERVE ALL APPLICABLE WATERING RESTRICTIONS AS SET FORTH BY THE PROPERTY'S JURISDICTIONAL AUTHORITY.
- O. EDGING
- a. CONTRACTOR SHALL INSTALL 4"x½" ROLLED TOP STEEL EDGING BETWEEN ALL SOD/SEED AREAS AND PLANTING BEDS.
- P. CLEANUP
1. UPON COMPLETION OF ALL PLANTING WORK AND BEFORE FINAL ACCEPTANCE, THE CONTRACTOR SHALL REMOVE ALL MATERIAL, EQUIPMENT, AND DEBRIS RESULTING FROM CONTRACTORS WORK. ALL PAVED AREAS SHALL BE CLEANED AND THE SITE LEFT IN A NEAT AND ACCEPTABLE CONDITION AS APPROVED BY THE OWNER'S REPRESENTATIVE.
- Q. PLANT MATERIAL MAINTENANCE
1. ALL PLANTS AND PLANTING INCLUDED UNDER THIS CONTRACT SHALL BE MAINTAINED BY WATERING, CULTIVATING, SPRAYING, PRUNING, AND ALL OTHER OPERATIONS (SUCH AS RE-STAKING OR REPAIRING GUY SUPPORTS) NECESSARY TO INSURE A HEALTHY PLANT CONDITION BY THE CONTRACTOR UNTIL CERTIFICATION OF ACCEPTANCE BY THE OWNER'S REPRESENTATIVE.
- R. FINAL INSPECTION AND ACCEPTANCE OF WORK
1. FINAL INSPECTION AT THE END OF THE WARRANTY PERIOD SHALL BE ON PLANTING, CONSTRUCTION AND ALL OTHER INCIDENTAL WORK PERTAINING TO THIS CONTRACT. ANY REPLACEMENT AT THIS TIME SHALL BE SUBJECT TO THE SAME ONE (1) YEAR WARRANTY (OR AS SPECIFIED BY THE LANDSCAPE ARCHITECT OR OWNER IN WRITING) BEGINNING WITH THE TIME OF REPLACEMENT AND ENDING WITH THE SAME INSPECTION AND ACCEPTANCE HEREIN DESCRIBED.
- S. WARRANTY
1. THE LIFE AND SATISFACTORY CONDITION OF ALL PLANT MATERIAL INSTALLED (INCLUDING SOD) BY THE LANDSCAPE CONTRACTOR SHALL BE WARRANTED BY THE CONTRACTOR FOR A MINIMUM OF ONE (1) CALENDAR YEAR COMMENCING AT THE TIME EXISTING TREES FOR CROWN BY THE OWNER'S REPRESENTATIVE.
2. ANY PLANT NOT FOUND IN A HEALTHY GROWING CONDITION AT THE END OF THE WARRANTY PERIOD SHALL BE REMOVED FROM THE SITE AND REPLACED AS SOON AS WEATHER CONDITIONS PERMIT. ALL REPLACEMENTS SHALL BE PLANTS OF THE SAME KIND AND SIZE AS SPECIFIED IN THE PLANT LIST. THEY SHALL BE FURNISHED PLANTED AND MULCHED AS SPECIFIED AT NO ADDITIONAL COST TO THE OWNER.
3. IN THE EVENT THE OWNER DOES NOT CONTRACT WITH THE CONTRACTOR FOR LANDSCAPE AND IRRIGATION MAINTENANCE, THE CONTRACTOR SHOULD VISIT THE PROJECT SITE PERIODICALLY DURING THE ONE (1) YEAR WARRANTY PERIOD TO EVALUATE MAINTENANCE PROCEDURES BEING PERFORMED BY THE OWNER. CONTRACTOR SHALL NOTIFY THE OWNER IN WRITING OF MAINTENANCE PROCEDURES OR CONDITIONS WHICH THREATEN VIGOROUS AND HEALTHY PLANT GROWTH.



BRAKES PLUS  
SITE DEVELOPMENT PLAN  
2467 MARKSHEFFEL ROAD

SITUATED IN A PORTION OF THE NORTHWEST QUARTER OF SECTION 4, TOWNSHIP 14 SOUTH, RANGE 65 WEST  
OF THE 6TH P.M., COUNTY OF EL PASO, STATE OF COLORADO

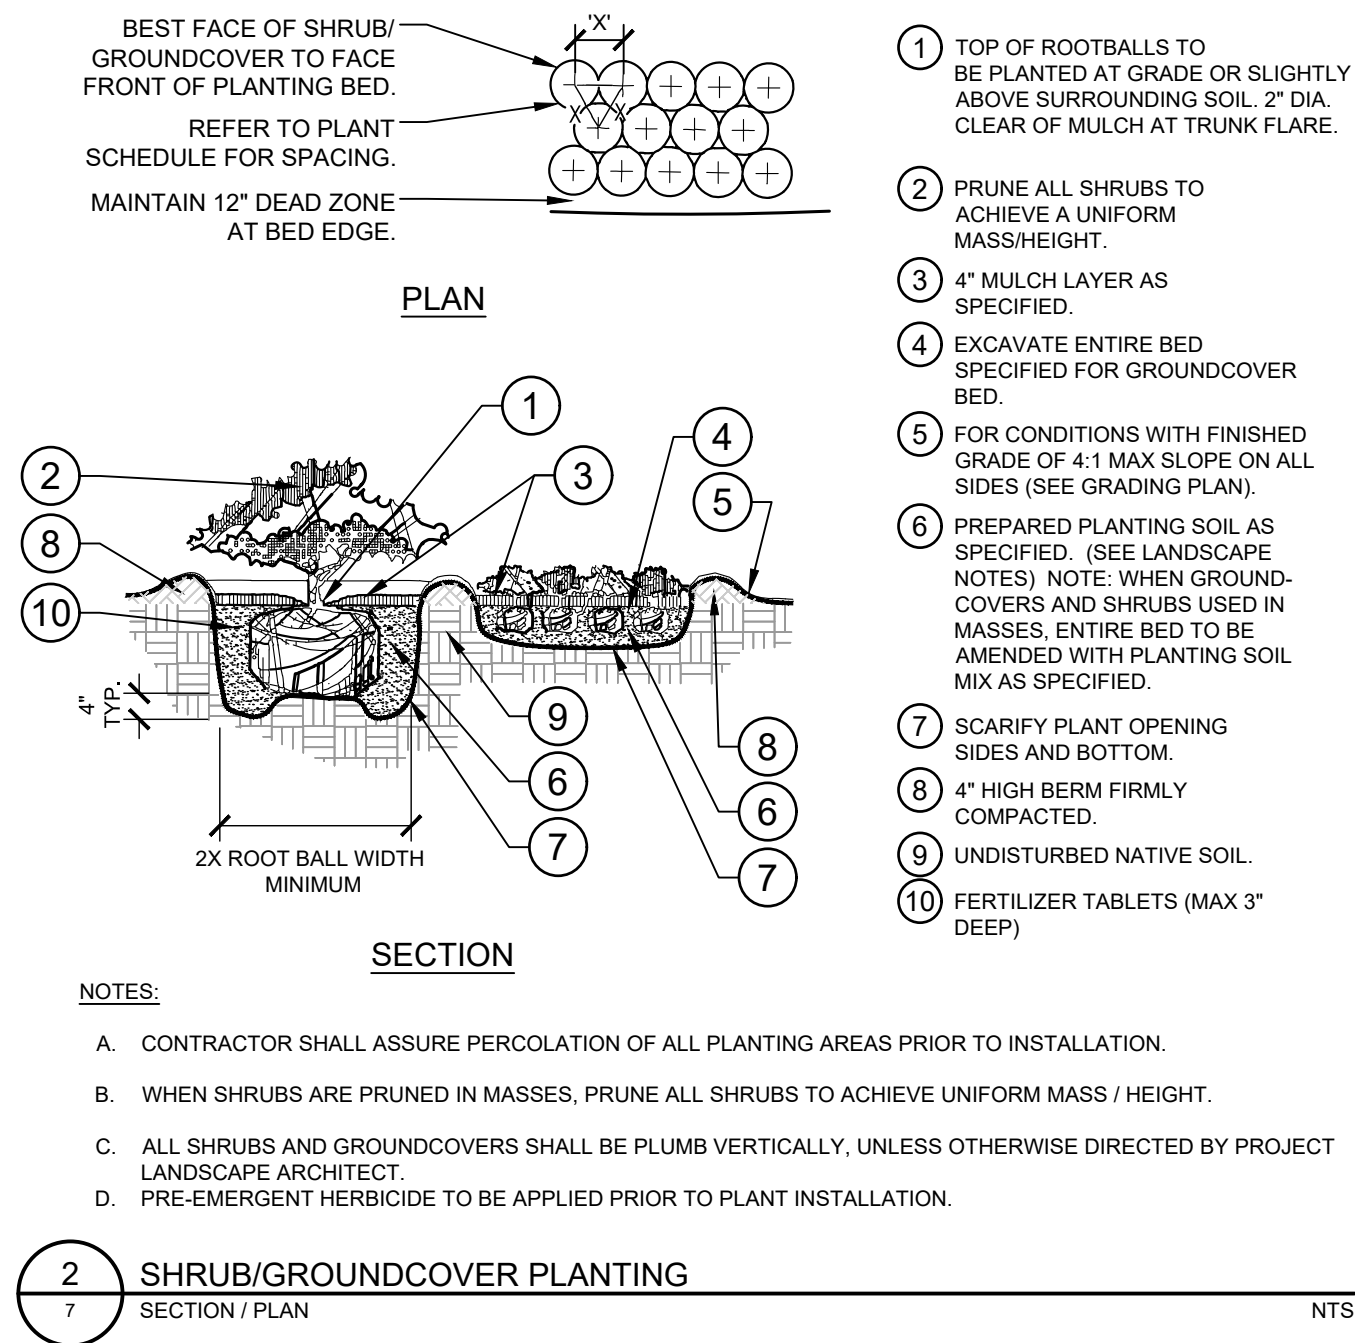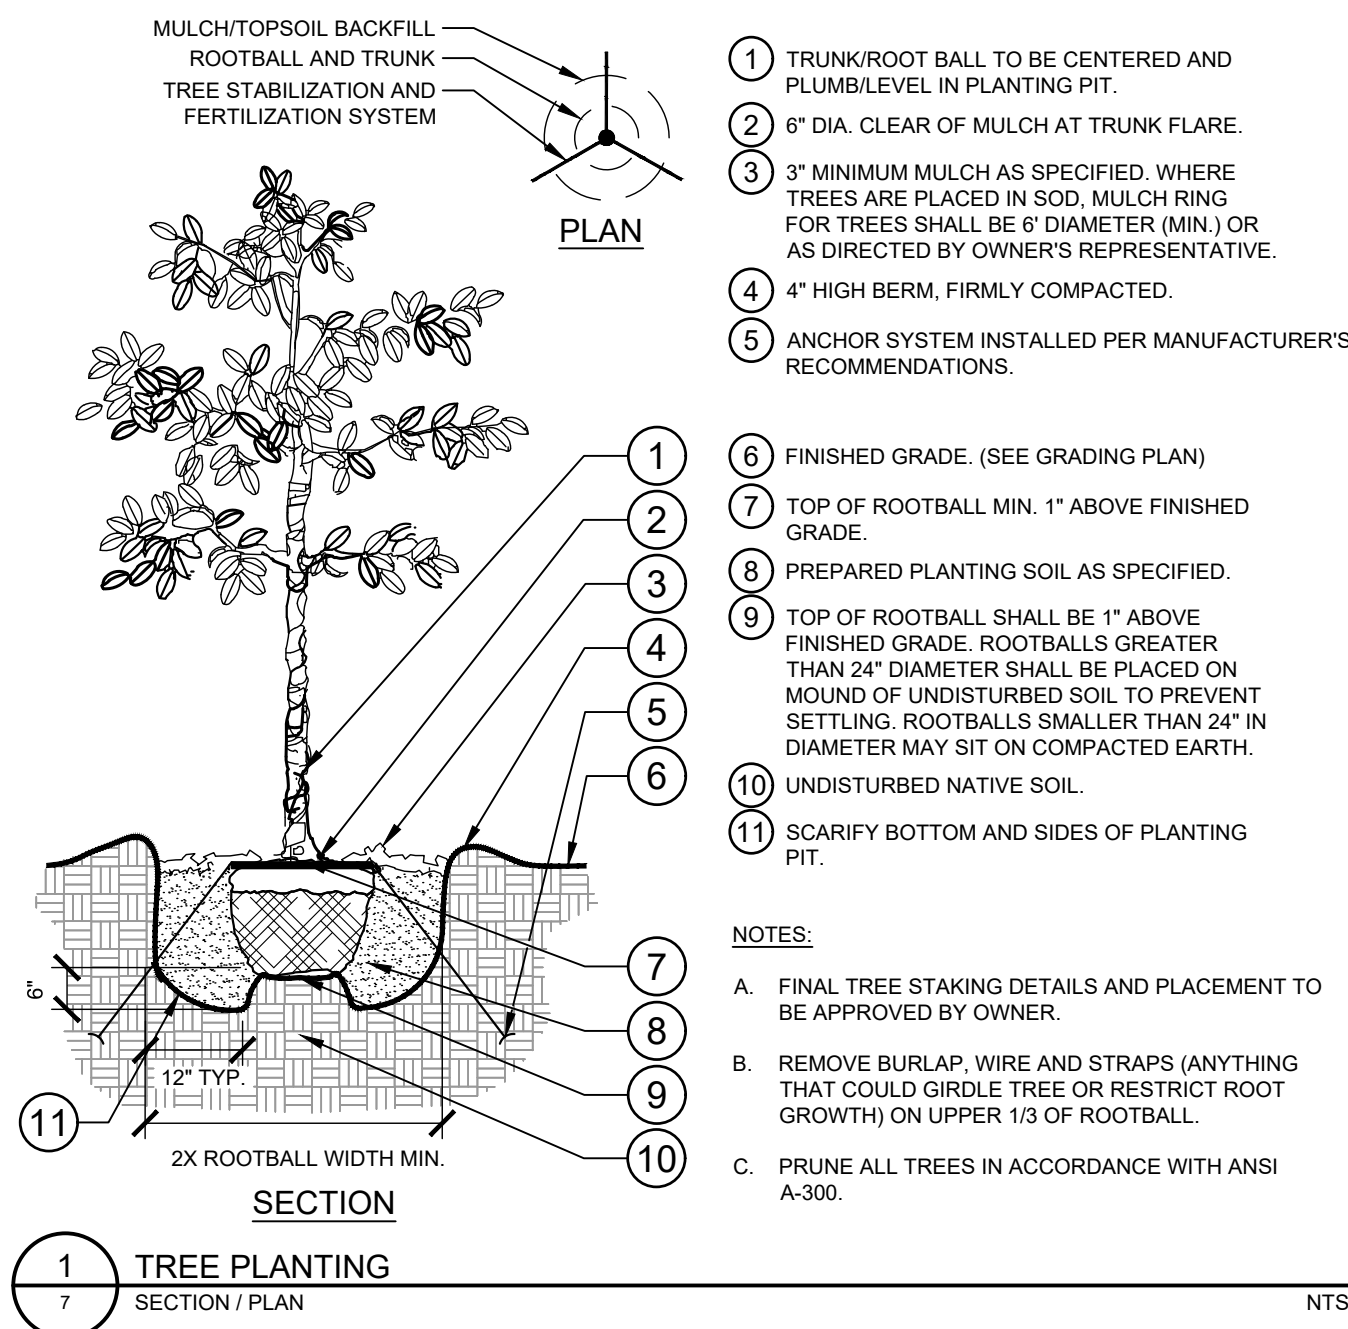

PLANT SCHEDULE

TREES	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE
	CO	2	CELTIS OCCIDENTALIS	COMMON HACKBERRY	B & B	2" CAL MIN	14' HT MIN
	JS2	2	JUNIPERUS SCOPULORUM	ROCKY MOUNTAIN JUNIPER	B & B		6' HT MIN
	QG	2	QUERCUS GAMBELII	GAMBEL OAK	B & B	2" CAL MIN	12' HT MIN
SHRUBS	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	SPACING	SIZE
	CB	23	CARYOPTERIS X CLANDONENSIS 'BLUE MIST'	BLUE MIST BLUEBEARD	5 GAL	SEE PLAN	18" HT MIN
	CV	23	CHRY/SOTHAMNUS VISCIDIFLORUS	YELLOW RABBITBRUSH	5 GAL	SEE PLAN	18" HT MIN
	FN	22	FORESTIERA NEOMEXICANA	NEW MEXICO PRIVET	5 GAL	SEE PLAN	24" HT MIN
	JJ	51	JUNIPERUS COMMUNIS	COMMON JUNIPER	5 GAL	SEE PLAN	24" HT MIN
	MR	58	MAHONIA REPENS	CREeping MAHONIA	5 GAL	SEE PLAN	12" HT MIN
	PM	23	PINUS MUGO MUGO	DWARF MUGO PINE	5 GAL	SEE PLAN	24" HT MIN
GROUND COVERS	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	SIZE	SPACING
	RM	5,172 SF	1-1/2" - 2" HORIZON RIVER ROCK MULCH	BY PIONEER SAND AND STONE	-		
	PP2	6,012 SF	POA PRATENSIS	KENTUCKY BLUEGRASS	SOD		

EL PASO COUNTY CODE TABLE

ROADWAY LANDSCAPE						
STREE NAME	STREET CLASSIFICATION	SETBACK WIDTH (FT) REQ./PROV.	LINEAR FOOTAGE (FT)	TREE/FEET REQUIRED	TREE REQ./PROV.	SUBST SHRUBS REQ./PROV.
Marksheffel Rd	Principle Arterial	25/53	115	1/20	6/4*	30/30
Private Road	Non-Arterial	10/10	132	1/30	5/0**	50/52
MOTOR VEHICLE LANDSCAPE						
NO. PARKING SPACES	TREES (1 SHADE TREE/15 SPACES) REQ./PROV.	FRONTAGE (LF)	SCREENING (LF) REQ. (2/3)/PROV.	SCREENING WIDTH (FT)	SCREENING HEIGHT (FT)	SCREEN EVERGREEN REQ./PROV.
22	2/2	214.5	142/176	6	3	50%/50%
INTERNAL LANDSCAPE						
SITE NET AREA (SQ FT)	INTERNAL LANDSCAPE AREA REQ. (5%)/PROV.	TREES/INTERNAL AREA REQUIRED	TREES REQ./PROV.	SUBST SHRUBS REQ./PROV.		
33,822.8	1,691 SF/10,766 SF	1/500	4/0***	40/60		
REQUIRED SCREENING						
SCREEN LOCATION	SCREENING WIDTH (FT)	SCREENING HEIGHT (FT)	SCREEN EVERGREEN REQ./PROV.			
Vehicle Repair Bay	6	6	50%/82%			
Refuse Collection Area	6	6	50%/100%			
GROUND COVER REQUIREMENTS						
TOTAL LANDSCAPE GROUND COVER	TOTAL LIVING LANDSCAPE COVER REQ./PROV	LIVING LANDSCAPE GROUND COVER PROVIDED	SHRUB COVER PROVIDED	TOTAL NONLIVING LANDSCAPE COVER		
11,008 SF	75%/75.4%	54.7%	20.7%	24.6%		

\* 33% TREE SUBSTITUTION DUE TO EASEMENT CONFLICTS ON MARKSHEFFEL RD LANDSCAPE SETBACK  
\*\* 100% TREE SUBSTITUTION DUE TO UTILITY AND EASEMENT CONFLICT ON PRIVATE, NON-ARTERIAL ROAD  
\*\*\* 100% TREE SUBSTITUTION DUE TO UTILITY AND EASEMENT CONFLICT IN INTERNAL LANDSCAPE

