

# **Ivilo Heights Subdivision Final Drainage Report**

**Colorado Springs, El Paso County, Colorado**

**April 2024**

**Completed By:**

**Brett Louk, P.E.**

**Eric Maxwell, I.E.**

**PCD No. SF245**



620 North Tejon, Suite 201  
Colorado Springs, Colorado 80903  
719-465-2145  
blouk@smhconsultants.com

# TABLE OF CONTENTS

- TABLE OF CONTENTS ..... 1
- STATEMENT SHEET ..... 2
- 1. INTRODUCTION ..... 3
- 2. DRAINAGE BASINS AND SUB-BASINS ..... 3
- 3. DRAINAGE DESIGN CRITERIA ..... 4
- 4. DRAINAGE FACILITY DESIGN ..... 5
- 5. FOUR STEP PROCESS ..... 7
- 6. FLOODPLAIN STATEMENT ..... 7
- 7. DRAINAGE BASIN FEES ..... 7
- 8. SUMMARY ..... 8


## APPENDIX

# STATEMENT SHEET

## Engineer's Statement:

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.

\_\_\_\_\_  
Brett Louk, P.E. # \_\_\_\_\_



\_\_\_\_\_  
Date

## Developer's Statement:

I, the developer have read and will comply with all of the requirements specified in this drainage report and plan.

*Pawel Posorski*

\_\_\_\_\_  
Pawel Posorski, Owner

\_\_\_\_\_  
04/03/2024

Date

Owner: 6225 Vessey LLC, Pawel Porsorski - Owner

Address: 3515 N. Chestnut St., Ste. 100

Colorado Springs, CO 80907

## El Paso County:

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 and 2, El Paso County Engineering Criteria Manual and Land Development Code as amended

\_\_\_\_\_  
Joshua Palmer, P.E.  
County Engineer

\_\_\_\_\_  
Date

Conditions:

# 1. INTRODUCTION

The owner of 6225 Vessey Road has asked SMH Consultants, P.A. (SMH) to conduct a stormwater drainage analysis for the proposed Ivilo Heights Subdivision to satisfy the El Paso County drainage criteria manual requirements. This analysis will determine potential impacts resulting from subdividing a 6.2-acre residential lot into 2 single-family residential lots.

## a. Development Location

The property is located in the NW  $\frac{1}{4}$  of Section 6, Township 12 South, Range 65 West in El Paso County, Colorado. The site consists of 6.2-acres with a single residential house that has been removed. The lot is bordered by residential properties on all sides. The site is accessed via private drive off of Vessey Road. The general location of the site can be seen in the appendix.

## b. Description of Property

The 6.2-acre site is to be divided into 2 residential lots. The site is located within the Kettle Creek Drainage Basin.

Based on a Custom Soil Resource Report, obtained from the USDA NRCS Web Soil Survey (accessed July 3, 2023) for the site, the native soil consists of *Elbeth sandy loam* with slopes ranging from 8-15 percent. This native soil is classified in Hydrologic Soil Group B. Group B soils are typically classified as somewhat excessively drained soil, with a low runoff class. The Custom Soil Report is included in the appendix of this report. Approximately half the site is forested and covered with trees and native vegetation. The other half is covered with native vegetation that has grown back in after the Black Forest Fire.

# 2. DRAINAGE BASINS AND SUB-BASINS

## a. Major Basin Descriptions

The subject site is entirely in the Kettle Creek drainage basin. Kettle Creek drainage basin was studied as part of the Drainage Basin Planning Study for Kettle Creek Basin prepared by JR Engineering LLC and approved on May 5, 2015. The project is in line with the results from the Drainage Basin Planning Study. The site can be split into seven smaller sub-basin drainage areas based on where flows leave the site. The Drainage Areas can be seen in the appendix of this report. The entirety of the site will sheet flow east, west and south at varying slopes from 3-15 percent and eventually meet in the Kettle Creek to the southwest.

## b. Sub-Basin Descriptions

EX-1 is approximately 0.71 acres located in the northwest corner of the site. Stormwater runoff flows southwest at slopes ranging from 3-7 percent and flows along existing terrain patterns to Design Point 1 west of the site. EX-1 consists of both pasture and forested areas

and has an existing gravel driveway to be removed. This sub-basin has existing 5-yr and 100-yr flows of 0.25 cfs and 1.69 cfs, respectively.

EX-2 is approximately 1.33 acres located in the northeast corner of the site. Stormwater flows southeast at slopes ranging from 5-7 percent and flows along existing terrain patterns to Design Point 2 east of the site. EX-2 consists of pasture and forested areas as well as a small section of existing gravel driveway to be removed. This sub-basin has existing 5-yr and 100-yr flows of 0.36 cfs and 2.93 cfs, respectively.

EX- 3 is approximately 0.38 acres located in the southwest corner of the site. Stormwater flows southwest at slopes ranging from 2-13 percent and flows along existing terrain patterns to Design Point 3 southwest of the site. EX-3 consists of pasture and forested areas. This sub-basin has existing 5-yr and 100-yr flows of 0.12 cfs and 1.00 cfs, respectively.

EX-4 is approximately 1.87 acres located in the center of the site. Stormwater flows south at slopes ranging from 4-16 percent and flows along existing terrain patterns to Design Point 4 south of the site. EX-4 consists of pasture and forested areas. This sub-basin has existing 5-yr and 100-yr flows of 0.55 cfs and 4.46 cfs, respectively.

EX-5 is approximately 0.56 acres located in the center of the site. Stormwater flows south at slopes ranging from 7-16 percent and flows along existing terrain patterns to Design Point 5 south of the site. EX-5 consists of pasture and forested areas. This sub-basin has existing 5-yr and 100-yr flows of 0.17 cfs and 1.38 cfs, respectively.

EX-6 is approximately 0.51 acres located in the east side of the site. Stormwater flows southeast at slopes ranging from 6-13 percent and flows along existing terrain patterns to Design Point 6 east of the site. EX-6 consists entirely of pasture area. This sub-basin has existing 5-yr and 100-yr flows of 0.16 cfs and 1.34 cfs, respectively.

EX- 7 is approximately 0.47 acres located in the southeast corner of the site. Stormwater flows southeast at slopes ranging from 5-16 percent and flows along existing terrain patterns to Design Point 7 southeast of the site. EX-7 consists entirely of pasture area. This sub-basin has existing 5-yr and 100-yr flows of 0.16 cfs and 1.33 cfs, respectively.

There are no offsite drainage areas that flow onto the site. The 5-yr and 100-yr hydrographs for the existing conditions are shown in the appendix of this report.

### **3. DRAINAGE DESIGN CRITERIA**

#### **a. Development Criteria Reference**

Pre- and post-development drainage characteristics were reviewed, studied, and analyzed using the *El Paso County Drainage Criteria Manual*, Federal Emergency Management Agency's Flood Insurance Rate Map and USDA NRCS Web Soil Survey. Hydraflow Hydrographs Extension and AutoCAD Civil3D modeling software were utilized to develop a model to determine peak flow hydrographs for the site.

## **b. Hydrologic Criteria**

Hydrology calculations in this report were performed following the methodologies outlined in the El Paso County Engineering Criteria Manual and the El Paso Drainage Criteria Manual (DCM) Volumes 1 and 2. Drainage characteristics were delineated based on existing topographic information from a topographical survey performed by Crossed Paths Surveying and USGS topographical maps. In the appendix, Figures 3 & 4 show the site drainage information.

Since the watershed area encompassing the development site is less than 100 acres, the Rational Method was used to determine peak flows for the 5-year and 100-year storm events. Weighted C values were determined for each drainage area within the proposed site based on the amount of impervious and pervious areas. A runoff coefficient (C) was chosen from Table 6-6 of the *El Paso County Drainage Criteria Manual, Volume 1 Update*. As mentioned earlier, the site consists of Hydrological Soil Group B. The Weighted C values are shown in the Appendix in Tables 1 and 2.

The time of concentration was calculated for each drainage area based off methods found in Chapter 6, Section 3.2 of the *El Paso County Drainage Criteria Manual, Volume 1 update*. The first 300 feet of unconcentrated overland flow time was calculated and added to the subsequent channelized flow times. Channelized flow times were calculated using channel flow time equation. Table 3, in the appendix, depicts the assumptions and variables used to determine the time of concentrations.

## **4. DRAINAGE FACILITY DESIGN**

### **a. General Concept**

The site will be subdivided into two single-family residential lots. This development does not include any site grading, roadway construction or drainage structure installation. Due to this, the developed drainage basins and design points are the same as pre-developed. The C values for the site will change minimally due to the addition of the two single-family residences. The 5- and 100-year hydrographs for the proposed conditions are shown in the appendix.

DP-1 is approximately 0.71 acres located in the northwest side of the site. The only planned improvement for this area is the existing driveway will be removed. The overall flow pattern will remain unchanged from existing conditions. This design point has proposed 5-year and 100-year flows of 0.20 cfs and 1.65 cfs, respectively.

DP-2 is approximately 1.33 acres located in the northeast side of the site. The planned improvements for this area could include a portion of a new gravel driveway and future residence. It is unknown at this time where the future residence and gravel driveway might be constructed. An estimation was made that 5% of the existing pervious area for DP-2 was counted as impervious area for the runoff calculations in the post-development condition. The overall flow pattern for DP-2 will remain unchanged from existing conditions. The

Review C1: The proposed runoff flow for DP2 is twice the existing amount. Please discuss whether this increase will impact downstream.

Review C2: Unresolved. It appears that downstream of DP2 consists of local road and single-family residential areas, not natural channels. Please explain how erosion can be prevented for the neighbors when the runoff flow differs from historical levels.

increase in runoff rates is not expected to have any negative effects on the downstream Kettle Creek, as runoff will travel over approximately 14,000 feet of pervious receiving area through natural channels. A suitable outfall, Kettle Creek, exists for this runoff. This design point has proposed 5-year and 100-year flows of 0.54 cfs and 3.18 cfs, respectively.

Proposed DP-3 is approximately 0.38 acres located in the southwest corner of the site. There are no planned improvements for this area and the overall flow pattern will remain unchanged from existing conditions. This design point has proposed 5-year and 100-year flows of 0.12 cfs and 1.00 cfs, respectively.

Review C1: The proposed runoff flow of DP4 is double the existing amount. Please discuss whether this increase will impact downstream.

Proposed DP-4 is approximately 1.87 acres located south of the site. The planned improvements for this area could include a portion of a new gravel driveway and future residence. It is unknown at this time where the future residence and gravel driveway might be constructed. An estimate was made that 5% of the existing pervious area for DP-4 was counted as impervious area for the runoff calculations in the post-development condition. The overall flow pattern for DP-4 will remain unchanged from existing conditions. The increase in runoff rates is not expected to have any negative effects on the downstream Kettle Creek, as runoff will travel over approximately 14,000 feet of pervious receiving area through natural channels. A suitable outfall, Kettle Creek, exists for this runoff. This design point has proposed 5-year and 100-year flows of 0.85 cfs and 4.99 cfs, respectively.

Review C2: Unresolved. It appears that downstream of DP4 consists of single-family residential areas, not natural channels. Please explain how erosion can be prevented for the neighbors when the runoff flow differs from historical levels.

Proposed DP-5 is approximately 0.56 acres located south of the site. The planned improvements for this area could include a portion of a new gravel driveway and future residence. It is unknown at this time where the future residence and gravel driveway might be constructed. An estimate was made that 5% of the existing pervious area for DP-5 was counted as impervious area for the runoff calculations in the post-development condition. The overall flow pattern for DP-5 will remain unchanged from existing conditions. This design point has proposed 5-year and 100-year flows of 0.26 cfs and 1.54 cfs, respectively.

Proposed DP-6 is approximately 0.51 acres located in the east side of the site. There are no planned improvements for this area and the overall flow pattern will remain unchanged from existing conditions. This design point has proposed 5-year and 100-year flows of 0.16 cfs and 1.34 cfs, respectively.

Proposed DP-7 is approximately 0.47 acres located in the southeast side of the site. There are no planned improvements for this area and the overall flow pattern will remain unchanged from existing conditions. This design point has proposed 5-year and 100-year flows of 0.16 cfs and 1.33 cfs, respectively.

A new shared driveway will be constructed off of Vessey Rd. to serve the two lots. An 18" culvert will be installed under this new driveway. Future owners of Lots 1 and 2 will be required to submit an engineered site plan at time of building permit. This engineered site plan shall depict the location of the house, driveway, and any necessary culverts that may be required based on placement of the house and driveway.

## **5. FOUR STEP PROCESS**

El Paso County requires a four-step process for stormwater quality management: reducing runoff volumes, treating the water quality capture volume, stabilizing streams, and implementing long-term source controls. These steps are further outlined in Volumes 1 and 2 of the County's Drainage Criteria Manual.

**Step 1: Employ Runoff Reduction Practices.** The site has been designed so that all runoff runs through native pasture before leaving the site and entering downstream receiving waters. This will minimize directly connected impervious areas within the site.

**Step 2: Implement BMPs that Provide Water Quality Capture Volume (WQCV) with Slow Release.** Per the Phase II Stormwater Regulations in Volume II of the Drainage Criteria Manual, this site is not required to provide permanent stormwater quality facilities. It is not part of a larger plan of development and the disturbed area is less than 1 acre. Per the County's Post Construction Stormwater Management Applicability (PBMP) Evaluation Form, permanent BMPs are not required as the project is considered a Large Lot Single-Family site with greater than 2.5 acres per dwelling and less than 10% impervious area for each lot.

**Step 3: Stabilize Drainageways.** The existing natural channels will remain in place and undisturbed. Leaving the existing native vegetation will provide established vegetation to help prevent erosion. Once runoff leaves the site, it will travel approximately 14,000 feet, through natural channels, before it enters Kettle Creek. Because of the path the runoff from the subject site takes, before it enters the first receiving waters, no downstream improvements are needed.

**Step 4: Implement Site Specific and Other Source Control BMPs.** Soil erosion control measures will be implemented during construction of the individual homes and the shared driveway. Some of the measures to be implemented during construction include: silt fence, temporary construction entrance, permanent/temporary seeding, etc. The full soil erosion control measures to be utilized during construction on the homes will be further outlined at the time of building permit application for the respective home.

## **6. FLOODPLAIN STATEMENT**

No portion of the site is located within a 100-year floodplain as determined by the Flood Insurance Rate Map (FIRM) number 08041C0315G effective date December 7, 2018 (see Figure 2 in the appendix).

## **7. DRAINAGE BASIN FEES**

The site is located entirely within the Kettle Creek Drainage Basin. The total amount of new development in the Kettle Creek Drainage Basin is 6.2 acres. The average impervious percentage for single family homes on a 2.5-acre lot is 11%. The lots will all be low density, therefore a 25% reduction is allowed. The 2024 drainage and bridge fees are as shown below.



Drainage Fees:  $6.2 \text{ acres} \times 0.11 \times 0.75 \times \$13,410/\text{acre} = \$6,859.22$

Bridge Fees: \$0

Total Fees: \$6,859.22

## **8. SUMMARY**

A drainage analysis was conducted for a 6.2-acre residential site to be subdivided into two single-family residential lots and will be known as Ivilo Subdivision. The site is located in the Kettle Creek drainage basin. Based on the analysis, the 5-year & 100-year post-development stormwater peak flow rates will be slightly higher than the pre-developed stormwater peak flow rates. Subdividing the site and developing 1 additional residential lot should not adversely impact surrounding or downstream properties.

## References

El Paso County Assessor (2020). *El Paso County Assessor's Real Property Search*. Retrieved from <https://www.elpasoco.com/search-el-paso-county/>

El Paso County Clerk and Recorder (2001-2020). *El Paso County Clerk and Recorder Web Access*. Retrieved from [publicrecordsearch.elpasoco.com/](http://publicrecordsearch.elpasoco.com/)

United States Department of Agriculture Natural Resources Conservation Service (2021, July 31). *Web Soil Survey*. Retrieved from <https://websoilsurvey.sc.egov.usda.gov/App/WebSoilSurvey.aspx>

Federal Emergency Management Agency (2020). *FEMA Flood Map Service Center*. Retrieved from <https://msc.fema.gov/portal/home>

El Paso County, Colorado (2018). *Drainage Criteria Manual Volume 1*. Retrieved from: [https://library.municode.com/co/el\\_paso\\_county/codes/drainage\\_criteria\\_manual?nodeId=DRCRMAVO1ELPACO](https://library.municode.com/co/el_paso_county/codes/drainage_criteria_manual?nodeId=DRCRMAVO1ELPACO)

El Paso County, Colorado (2018). *Drainage Criteria Manual Volume 2*. Retrieved from: [https://library.municode.com/co/el\\_paso\\_county/codes/drainage\\_criteria\\_manual?nodeId=DRCRMAVO2STQUPOPRBEMAPRBM](https://library.municode.com/co/el_paso_county/codes/drainage_criteria_manual?nodeId=DRCRMAVO2STQUPOPRBEMAPRBM)

JR Engineering LLC (2015). *Drainage Basin Planning Study for Kettle Creek Basin*. Retrieved from: [https://coloradosprings.gov/sites/default/files/5 - kettle\\_creek.pdf](https://coloradosprings.gov/sites/default/files/5_-_kettle_creek.pdf)

# APPENDIX

---


# VICINITY MAP

---

**IVILO HEIGHTS SUBDIVISION**

EL PASO COUNTY, COLORADO

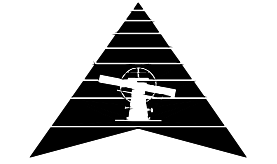

REVISION DATE	REVISION DESCRIPTION (DESCRIPTION)	VICINITY MAP
00/00/00		
NORTH		 SCALE: 1" = 100' PROJECT #: 2209-0355 CHECKED BY: BML DRAWN BY: EDM DATE: 07/26/2023 SHEET # <b>FIG. 1</b> TOTAL SHEETS

# SOILS REPORT

---



United States  
Department of  
Agriculture

**NRCS**

Natural  
Resources  
Conservation  
Service

A product of the National  
Cooperative Soil Survey,  
a joint effort of the United  
States Department of  
Agriculture and other  
Federal agencies, State  
agencies including the  
Agricultural Experiment  
Stations, and local  
participants

# Custom Soil Resource Report for El Paso County Area, Colorado

6225 Vessey Rd.



# Preface

---

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist ([http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2\\_053951](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951)).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require



alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

# Contents

---

<b>Preface</b> .....	2
<b>How Soil Surveys Are Made</b> .....	5
<b>Soil Map</b> .....	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
El Paso County Area, Colorado.....	13
26—Elbeth sandy loam, 8 to 15 percent slopes.....	13
<b>References</b> .....	15

# How Soil Surveys Are Made

---

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

## Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

## Custom Soil Resource Report


identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

# Soil Map

---


The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

# Custom Soil Resource Report Soil Map



### MAP LEGEND

**Area of Interest (AOI)**

 Area of Interest (AOI)

**Soils**

 Soil Map Unit Polygons

 Soil Map Unit Lines


 Soil Map Unit Points

**Special Point Features**

-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features


**Water Features**

 Streams and Canals

**Transportation**

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

**Background**

 Aerial Photography

### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL:  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado  
 Survey Area Data: Version 20, Sep 2, 2022

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 9, 2021—Jun 12, 2021

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.



## Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
26	Elbeth sandy loam, 8 to 15 percent slopes	6.3	100.0%
<b>Totals for Area of Interest</b>		<b>6.3</b>	<b>100.0%</b>

## Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

## Custom Soil Resource Report

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

## El Paso County Area, Colorado

### 26—Elbeth sandy loam, 8 to 15 percent slopes

#### Map Unit Setting

*National map unit symbol:* 367y  
*Elevation:* 7,300 to 7,600 feet  
*Farmland classification:* Not prime farmland

#### Map Unit Composition

*Elbeth and similar soils:* 85 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Elbeth

##### Setting

*Landform:* Hills  
*Landform position (three-dimensional):* Side slope  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Alluvium derived from arkose

##### Typical profile

*A - 0 to 3 inches:* sandy loam  
*E - 3 to 23 inches:* loamy sand  
*Bt - 23 to 68 inches:* sandy clay loam  
*C - 68 to 74 inches:* sandy clay loam

##### Properties and qualities

*Slope:* 8 to 15 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Well drained  
*Runoff class:* Medium  
*Capacity of the most limiting layer to transmit water (Ksat):* Moderately high (0.20 to 0.60 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Available water supply, 0 to 60 inches:* Moderate (about 7.1 inches)

##### Interpretive groups

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 4e  
*Hydrologic Soil Group:* B  
*Ecological site:* F048AY908CO - Mixed Conifer  
*Hydric soil rating:* No

#### Minor Components

##### Other soils

*Percent of map unit:*  
*Hydric soil rating:* No

##### Pleasant

*Percent of map unit:*  
*Landform:* Depressions

## Custom Soil Resource Report

*Hydric soil rating:* Yes

# References

---

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_054262](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262)
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053577](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577)
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053580](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580)
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2\\_053374](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374)
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

## Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2\\_054242](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242)

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053624](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624)

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. [http://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/nrcs142p2\\_052290.pdf](http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf)

# FEMA FLOOD PLAIN MAP

---

**NOTES TO USERS**

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

**Coastal Base Flood Elevations** shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services  
NOAA, NUNCS12  
National Geodetic Survey  
SSMC-3, #9202  
1315 East-West Highway  
Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

**Base Map** information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, City of Fountain, Bureau of Land Management, National Oceanic and Atmospheric Administration, United States Geological Survey, and Anderson Consulting Engineers, Inc. These data are current as of 2006.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

**Corporate limits** shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.


Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FMIX) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at <http://www.msc.fema.gov/>.

If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call 1-877-FEMA MAP (1-877-336-2627) or visit the FEMA website at <http://www.fema.gov/business/nfp/>.


**El Paso County Vertical Datum Offset Table**

Flooding Source	Vertical Datum Offset (ft)
REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION	


**Panel Location Map**

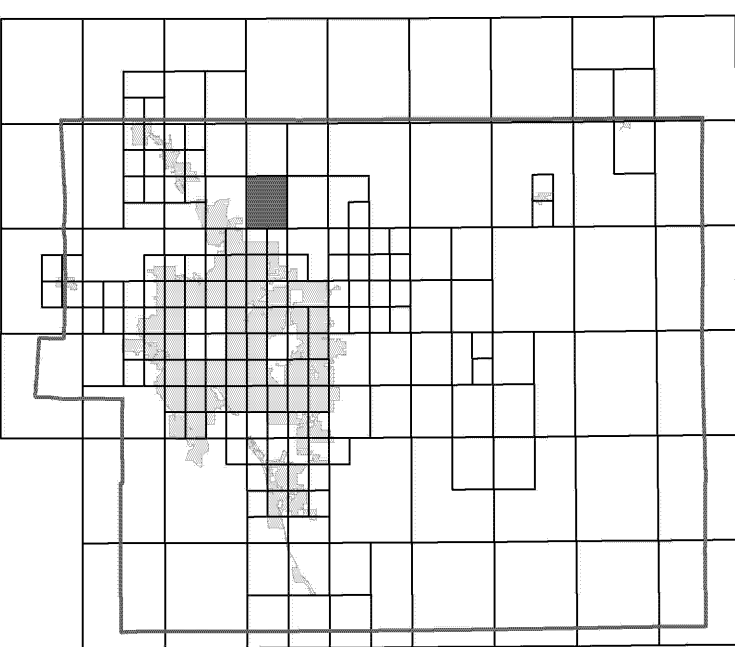

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).



Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

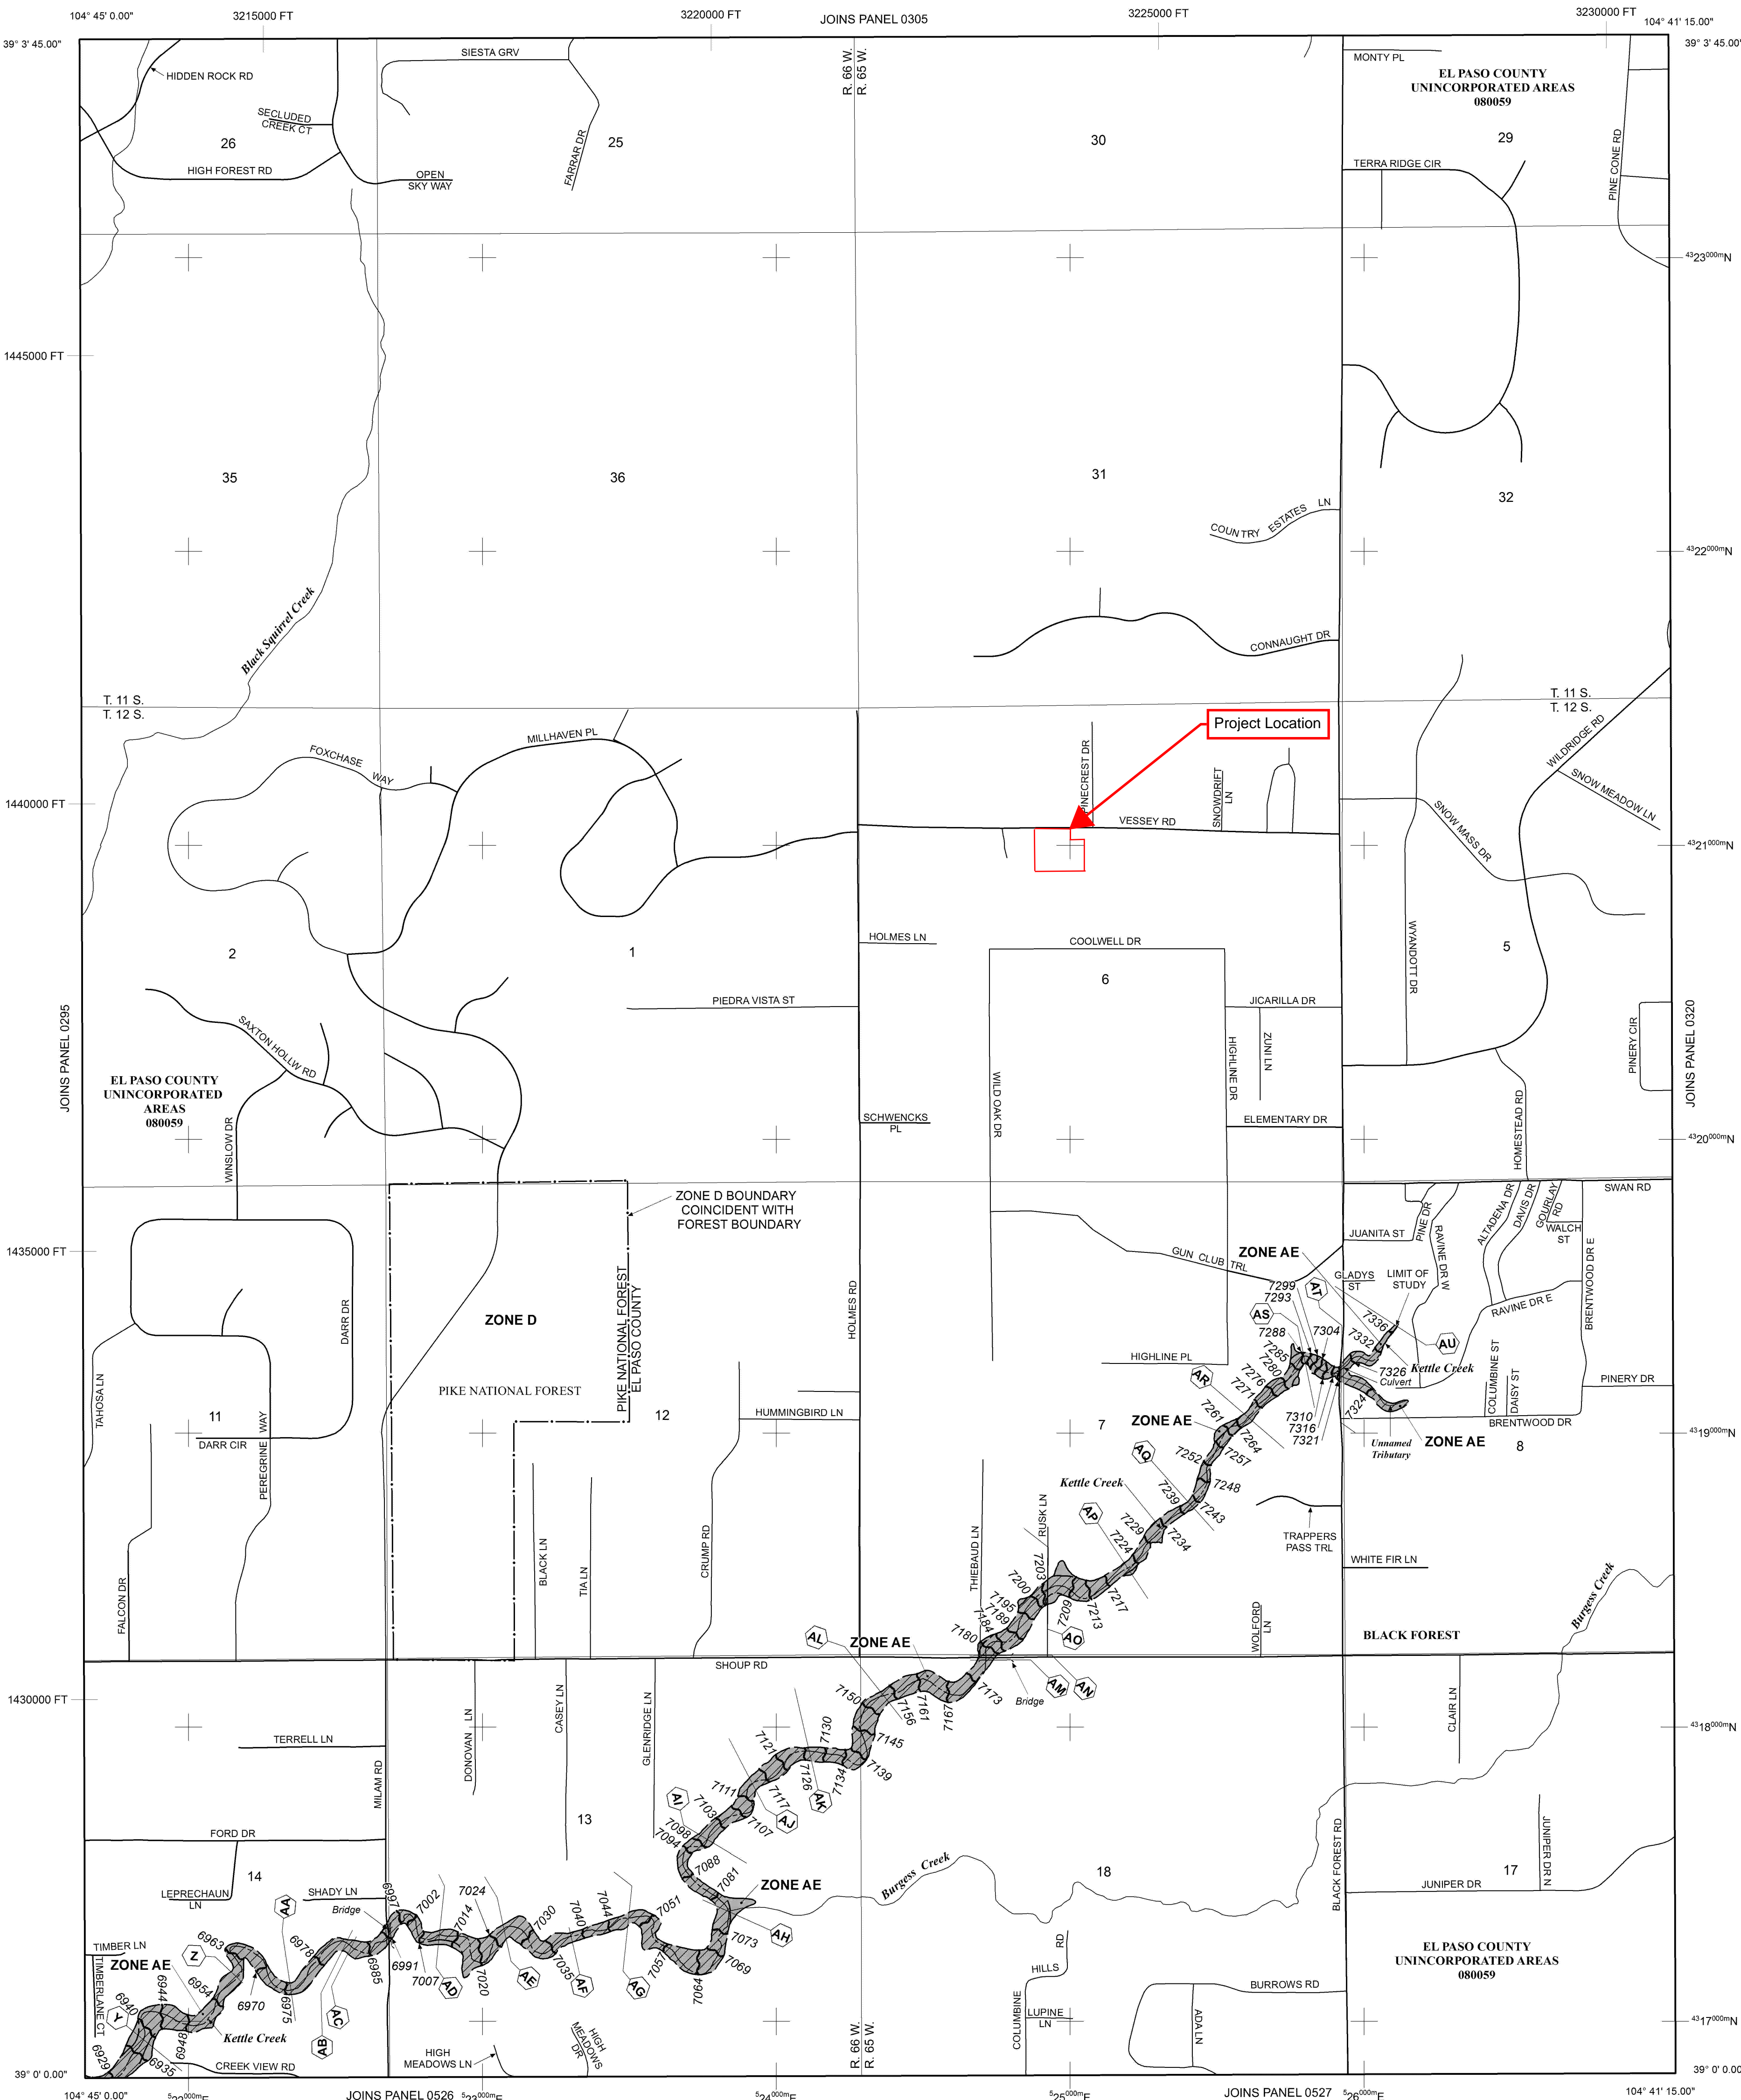


**LEGEND**

- SPECIAL FLOOD HAZARD AREAS (SFHAs) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD
- The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equalled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.
- ZONE A** No Base Flood Elevations determined.
- ZONE AE** Base Flood Elevations determined.
- ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.
- ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.
- ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
- ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.
- ZONE V** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.
- ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.
- FLOODWAY AREAS IN ZONE AE
- The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.
- OTHER FLOOD AREAS**
- ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot, or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.
- OTHER AREAS**
- ZONE X** Areas determined to be outside the 0.2% annual chance floodplain.
- ZONE D** Areas in which flood hazards are undetermined, but possible.
- COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS
- OTHERWISE PROTECTED AREAS (OPAs)

- CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.
- Floodplain boundary
- Floodway boundary
- Zone D boundary
- CBRS and OPA boundary
- Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities.
- Base Flood Elevation line and value; elevation in feet\* (EL 987)

- \* Referenced to the North American Vertical Datum of 1988 (NAVD 88)
- Cross section line
- Transsect line
- Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)
- 1000-meter Universal Transverse Mercator grid ticks, zone 13
- 5000-foot grid ticks; Colorado State Plane coordinate system, central zone (FIPSZONE 0502), Lambert Conformal Conic Projection
- Bench mark (see explanation in Notes to Users section of this FIRM map)
- River Mile

- MAP REPOSITORIES**  
Refer to Map Repositories list on Map Index
- EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP**  
MARCH 17, 1997
- EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL**  
DECEMBER 7, 2018 - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision.
- For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.
- To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

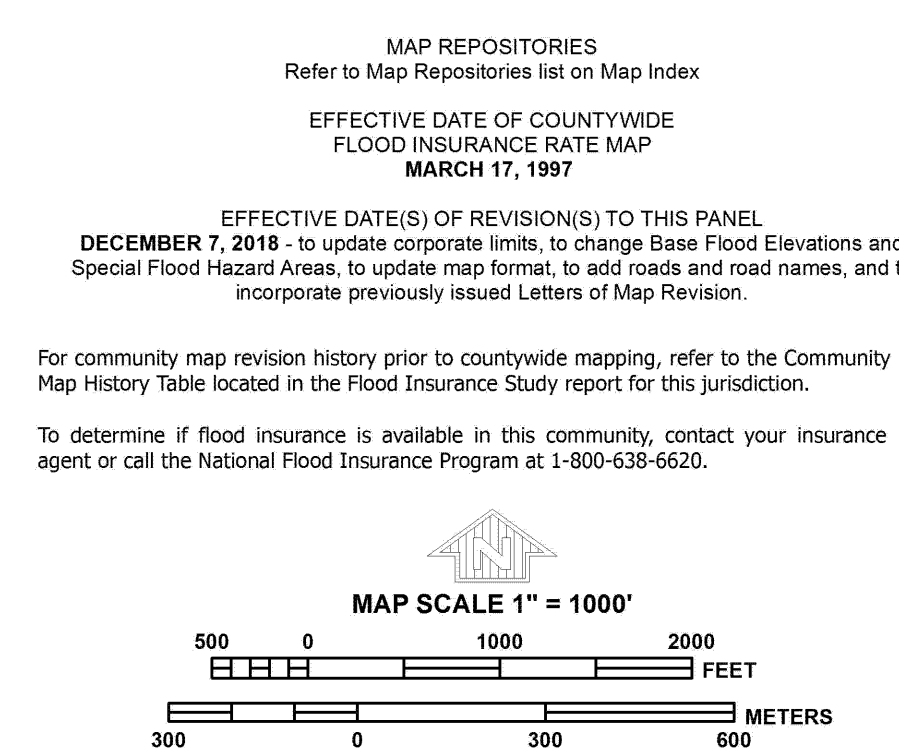

**NFIP** **PANEL 0315G**

---

**FIRM**  
FLOOD INSURANCE RATE MAP  
**EL PASO COUNTY,  
COLORADO  
AND INCORPORATED AREAS**

**PANEL 315 OF 1300**  
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:  
COMMUNITY NUMBER PANEL SUFFIX  
EL PASO COUNTY 080059 0315 0

---

Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

**MAP NUMBER  
08041C0315G**

**MAP REVISED  
DECEMBER 7, 2018**

Federal Emergency Management Agency



# HYDROLOGIC CALCULATIONS

---

Table 1 - Pre-Development Weighted C Calculations

Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-1 (5-Year)	Pasture/Meadow	0.08	0.24	0.02
	Gravel	0.59	0.03	0.02
	Forest	0.08	0.44	0.04
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.10
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-2 (5-Year)	Pasture/Meadow	0.08	0.65	0.05
	Gravel	0.59	0.003	0.00
	Forest	0.08	0.68	0.05
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-3 (5-Year)	Pasture/Meadow	0.08	0.16	0.01
	Forest	0.08	0.22	0.02
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-4 (5-Year)	Pasture/Meadow	0.08	0.96	0.08
	Forest	0.08	0.91	0.07
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-5 (5-Year)	Pasture/Meadow	0.08	0.51	0.04
	Forest	0.08	0.05	0.00
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-6 (5-Year)	Pasture/Meadow	0.08	0.51	0.04
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
EX-7 (5-Year)	Pasture/Meadow	0.08	0.47	0.04
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-1 (100-Year)	Pasture/Meadow	0.35	0.24	0.08
	Gravel	0.70	0.03	0.02
	Forest	0.35	0.44	0.16
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.36
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-2 (100-Year)	Pasture/Meadow	0.35	0.65	0.23
	Gravel	0.70	0.003	0.00
	Forest	0.35	0.68	0.24
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-3 (100-Year)	Pasture/Meadow	0.35	0.16	0.05
	Forest	0.35	0.22	0.08
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-4 (100-Year)	Pasture/Meadow	0.35	0.96	0.34
	Forest	0.35	0.91	0.32
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-5 (100-Year)	Pasture/Meadow	0.35	0.51	0.18
	Forest	0.35	0.05	0.02
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-6 (100-Year)	Pasture/Meadow	0.35	0.51	0.18
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
EX-7 (100-Year)	Pasture/Meadow	0.35	0.47	0.16
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35

Table 2 - Post-Development Weighted C Calculations

Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-1 (5-Year)	Pasture/Meadow	0.08	0.27	0.02
	Forest	0.08	0.44	0.04
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-2 (5-Year)	Pasture/Meadow	0.08	0.59	0.05
	Drive and Walks	0.90	0.13	0.12
	Forest	0.08	0.61	0.05
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.16
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-3 (5-Year)	Pasture/Meadow	0.08	0.16	0.01
	Forest	0.08	0.22	0.02
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-4 (5-Year)	Pasture/Meadow	0.08	0.86	0.07
	Drive and Walks	0.90	0.19	0.17
	Forest	0.08	0.82	0.07
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.16
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-5 (5-Year)	Pasture/Meadow	0.08	0.46	0.04
	Drive and Walks	0.90	0.06	0.05
	Forest	0.08	0.05	0.00
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.16
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-6 (5-Year)	Pasture/Meadow	0.08	0.51	0.04
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>5</sub> Value	Area (AC)	CxA
P-7 (5-Year)	Pasture/Meadow	0.08	0.47	0.04
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.08
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-1 (100-Year)	Pasture/Meadow	0.35	0.27	0.09
	Forest	0.35	0.44	0.15
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-2 (100-Year)	Pasture/Meadow	0.35	0.59	0.21
	Drive and Walks	0.96	0.13	0.12
	Forest	0.35	0.61	0.21
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.41
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-3 (100-Year)	Pasture/Meadow	0.35	0.16	0.05
	Forest	0.35	0.22	0.08
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-4 (100-Year)	Pasture/Meadow	0.35	0.86	0.30
	Drive and Walks	0.96	0.19	0.18
	Forest	0.35	0.82	0.29
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.41
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-5 (100-Year)	Pasture/Meadow	0.35	0.46	0.16
	Drive and Walks	0.96	0.06	0.05
	Forest	0.35	0.05	0.02
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.41
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-6 (100-Year)	Pasture/Meadow	0.35	0.51	0.18
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35
Drainage Basin	Cover Type	C <sub>100</sub> Value	Area (AC)	CxA
P-7 (100-Year)	Pasture/Meadow	0.35	0.47	0.16
Weighted C: (CxA) <sub>tot</sub> /A <sub>tot</sub>				0.35

**Table 3 - Calculation of Time of Concentration - Pre-Development**

Drainage Area ID	Area (SF)	Area (Acre)	C5	C100	Longest Flow Path (ft)	High Elev.	Low Elev.	Average Slope	Overland Flow Time	Travel Time From Equation 6-9	Time of Concentration (Minutes)
EX-1	30927.60	0.71	0.10	0.36	280	7515.67	7501.85	4.93%	17.83	0.00	17.83
EX-2	57934.80	1.33	0.08	0.35	566	7515.25	7481.51	5.96%	17.66	2.68	20.34
EX-3	16552.80	0.38	0.08	0.35	232	7504.75	7486.89	7.69%	14.30	0.00	14.30
EX-4	81457.20	1.87	0.08	0.35	440	7514.36	7480.38	7.72%	15.80	1.31	17.11
EX-5	24393.60	0.56	0.08	0.35	324	7508.68	7478.84	9.20%	15.62	0.14	15.76
EX-6	22215.6	0.51	0.08	0.35	240	7501.9	7480.61	8.87%	13.94	0.00	13.94
EX-7	20473.2	0.47	0.08	0.35	174	7497.031	7482.098	8.56%	11.95	0.00	11.95

**Table 4 - Calculation of Time of Concentration - Post-Development**

Drainage Area ID	Area (SF)	Area (Acre)	C5	C100	Longest Flow Path (ft)	High Elev.	Low Elev.	Average Slope	Overland Flow Time	Travel Time From Equation 6-9	Time of Concentration (Minutes)
P-1	30927.60	0.71	0.08	0.35	280	7515.67	7501.85	4.93%	18.20	0.00	18.20
P-2	57934.80	1.33	0.12	0.38	566	7515.25	7481.51	5.96%	16.92	2.68	19.60
P-3	16552.80	0.38	0.08	0.35	232	7504.75	7486.89	7.69%	14.30	0.00	14.30
P-4	81457.20	1.87	0.12	0.38	440	7514.36	7480.38	7.72%	15.18	1.31	16.49
P-5	24393.60	0.56	0.12	0.38	324	7508.68	7478.84	9.20%	14.96	0.14	15.11
P-6	22215.60	0.51	0.08	0.35	240	7501.90	7480.61	8.87%	13.94	0.00	13.94
P-7	20473.20	0.47	0.08	0.35	174	7497.03	7482.10	8.56%	11.95	0.00	11.95

Time of Concentration Calculations																					
Sub-Basin Data			Time of Concentration Estimate															In. $t_c$ in Urban		Final $t_c$	
Basin	Area (ac)	$C_s$	Initial/Overland Time ( $t_i$ )			Travel Time ( $t_t$ )						Travel Time ( $t_t$ )						Comp.	$t_c$ Check (urban)		
			Length (ft)	Slope	$t_i$ (min)	Length (ft)	Slope	Land Type	$C_v$	Velocity (ft/sec)	$t_t$ (min)	Length (ft)	Slope	Land Type	$C_v$	Velocity (ft/sec)	$t_t$ (min)	$t_c$ (min)	Total Length		$t_c$ Check
EX. DP-1	0.71	0.10	280	0.049	17.83	0	1.000	SP	7	7.00	0.00							17.83	280.00	11.56	17.83
EX. DP-2	1.33	0.08	300	0.060	17.66	266	0.056	SP	7	1.66	2.68							20.34	566.00	13.14	20.34
EX. DP-3	0.38	0.08	232	0.077	14.30	0	1.000	SP	7	7.00	0.00							14.30	232.00	11.29	14.30
EX. DP-4	1.87	0.08	300	0.084	15.80	140	0.065	SP	7	1.78	1.31							17.11	440.00	12.44	17.11
EX. DP-5	0.56	0.08	300	0.087	15.62	24	0.161	SP	7	2.81	0.14							15.76	324.00	11.80	15.76
EX. DP-6	0.51	0.08	240	0.088	13.94	0	1.000	SP	7	7.00	0.00							13.94	240.00	11.33	13.94
EX. DP-7	0.47	0.08	174	0.086	11.95	0	1.000	SP	7	7.00	0.00							11.95	174.00	10.97	11.95
DP-1	0.71	0.08	280	0.049	18.20	0	1.000	SP	7	7.00	0.00							18.20	280.00	11.56	18.20
DP-2	1.33	0.12	300	0.060	16.92	266	0.056	SP	7	1.66	2.68							19.60	566.00	13.14	19.60
DP-3	0.38	0.08	232	0.077	14.30	0	1.000	SP	7	7.00	0.00							14.30	232.00	11.29	14.30
DP-4	1.87	0.12	300	0.084	15.18	140	0.065	SP	7	1.78	1.31							16.49	440.00	12.44	16.49
DP-5	0.56	0.12	300	0.087	14.96	24	0.161	SP	7	2.81	0.14							15.11	324.00	11.80	15.11
DP-6	0.51	0.08	240	0.088	13.94	0	1.000	SP	7	7.00	0.00							13.94	240.00	11.33	13.94
DP-7	0.47	0.08	174	0.086	11.95	0	1.000	SP	7	7.00	0.00							11.95	174.00	10.97	11.95

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 1

EX-1 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.252 cfs
Storm frequency	= 5 yrs	Time to peak	= 18 min
Time interval	= 1 min	Hyd. volume	= 272 cuft
Drainage area	= 0.710 ac	Runoff coeff.	= 0.1
Intensity	= 3.553 in/hr	Tc by User	= 18.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

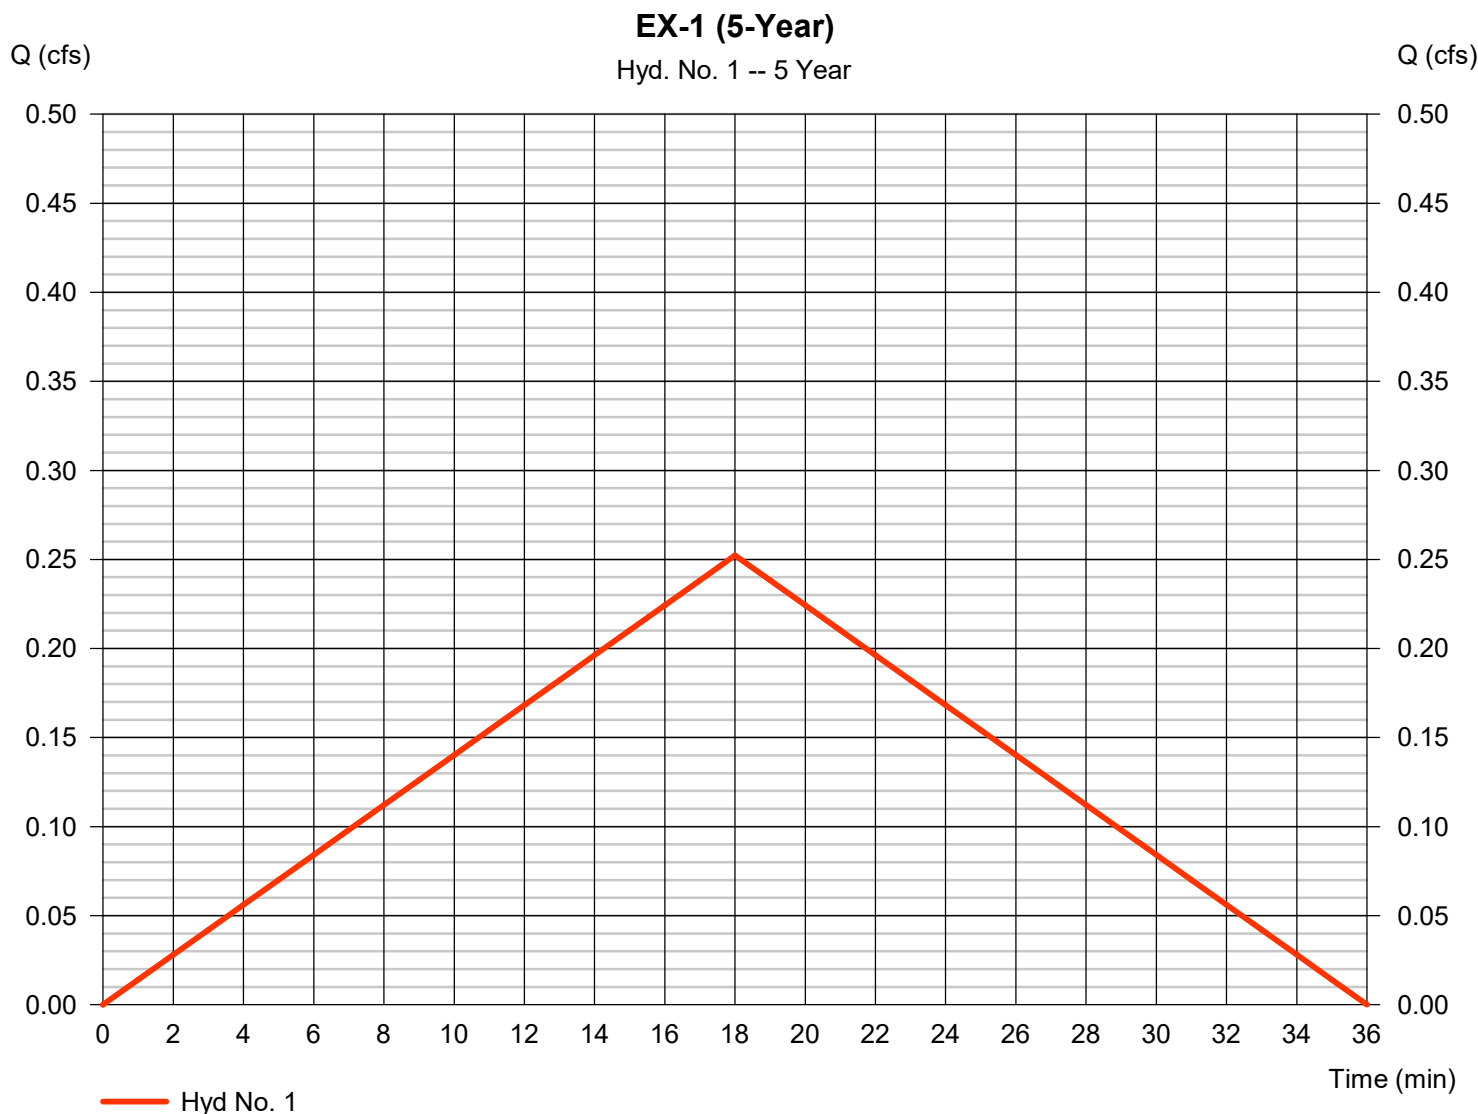

# Hydrograph Report

## Hyd. No. 2

P-1 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.202 cfs
Storm frequency	= 5 yrs	Time to peak	= 18 min
Time interval	= 1 min	Hyd. volume	= 218 cuft
Drainage area	= 0.710 ac	Runoff coeff.	= 0.08
Intensity	= 3.553 in/hr	Tc by User	= 18.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 3

EX-2 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.358 cfs
Storm frequency	= 5 yrs	Time to peak	= 20 min
Time interval	= 1 min	Hyd. volume	= 429 cuft
Drainage area	= 1.330 ac	Runoff coeff.	= 0.08
Intensity	= 3.363 in/hr	Tc by User	= 20.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1





# Hydrograph Report

## Hyd. No. 4

P-2 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.537 cfs
Storm frequency	= 5 yrs	Time to peak	= 20 min
Time interval	= 1 min	Hyd. volume	= 644 cuft
Drainage area	= 1.330 ac	Runoff coeff.	= 0.12
Intensity	= 3.363 in/hr	Tc by User	= 20.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1



# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 5

EX-3 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.123 cfs
Storm frequency	= 5 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 103 cuft
Drainage area	= 0.380 ac	Runoff coeff.	= 0.08
Intensity	= 4.030 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

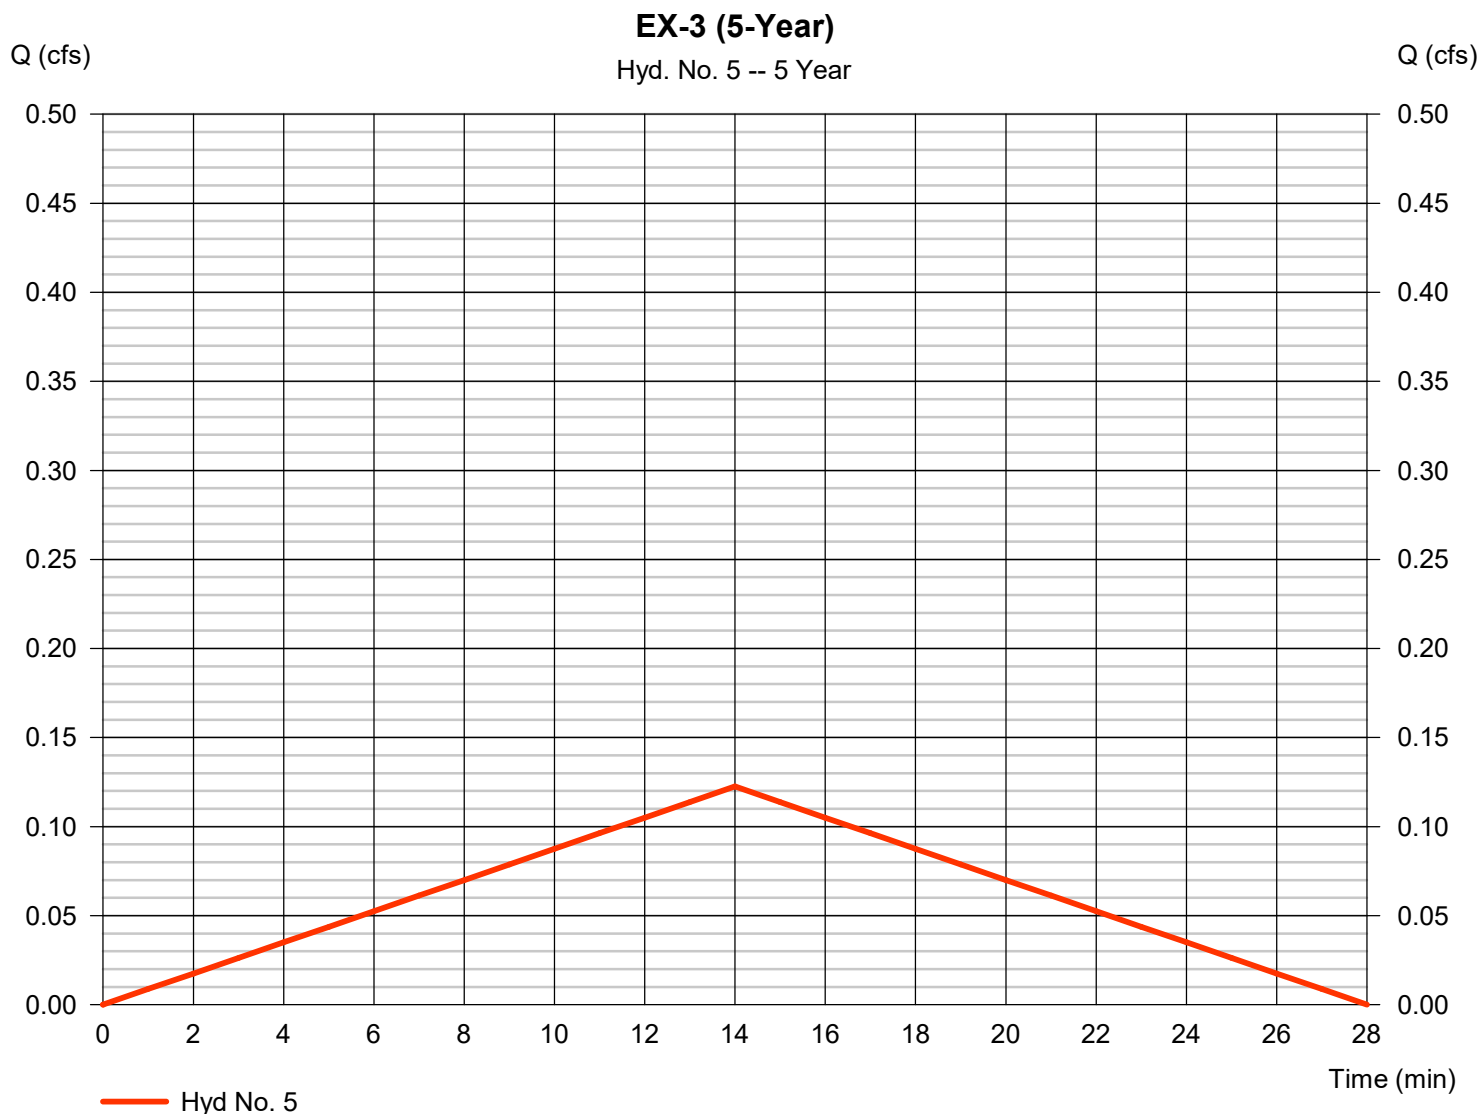


# Hydrograph Report

## Hyd. No. 6

P-3 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.123 cfs
Storm frequency	= 5 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 103 cuft
Drainage area	= 0.380 ac	Runoff coeff.	= 0.08
Intensity	= 4.030 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

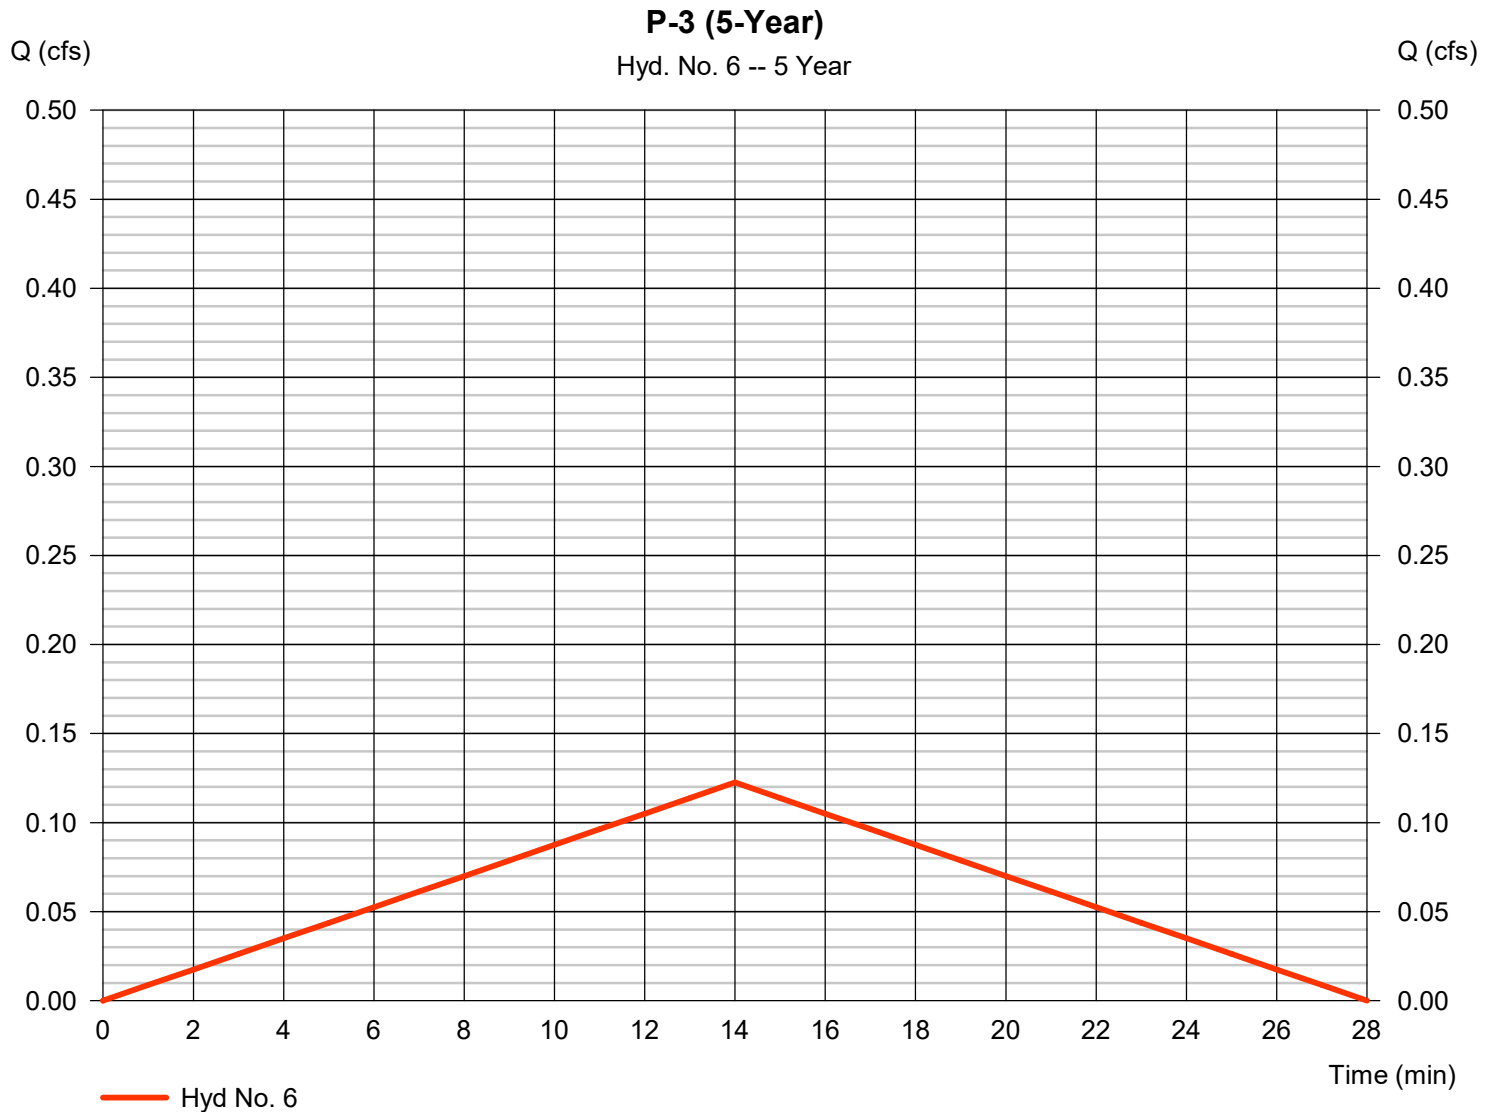

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 7

EX-4 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.547 cfs
Storm frequency	= 5 yrs	Time to peak	= 17 min
Time interval	= 1 min	Hyd. volume	= 558 cuft
Drainage area	= 1.870 ac	Runoff coeff.	= 0.08
Intensity	= 3.658 in/hr	Tc by User	= 17.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1




# Hydrograph Report

## Hyd. No. 8

P-4 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.846 cfs
Storm frequency	= 5 yrs	Time to peak	= 16 min
Time interval	= 1 min	Hyd. volume	= 813 cuft
Drainage area	= 1.870 ac	Runoff coeff.	= 0.12
Intensity	= 3.772 in/hr	Tc by User	= 16.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

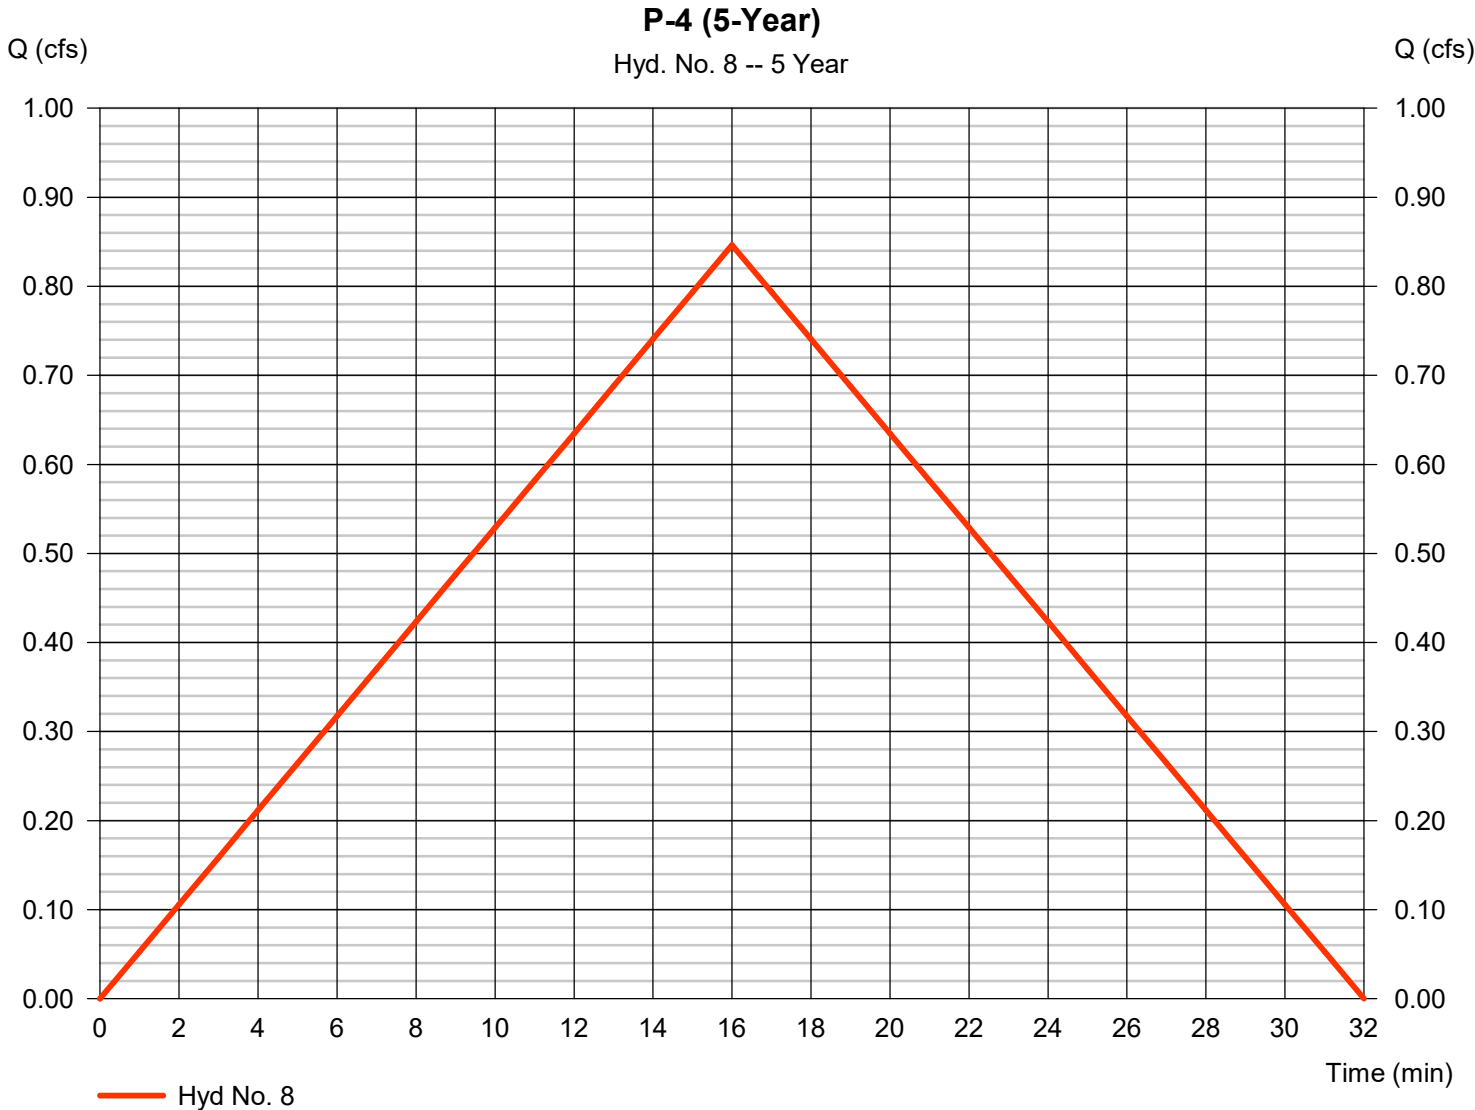


# Hydrograph Report

## Hyd. No. 9

EX-5 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.169 cfs
Storm frequency	= 5 yrs	Time to peak	= 16 min
Time interval	= 1 min	Hyd. volume	= 162 cuft
Drainage area	= 0.560 ac	Runoff coeff.	= 0.08
Intensity	= 3.772 in/hr	Tc by User	= 16.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

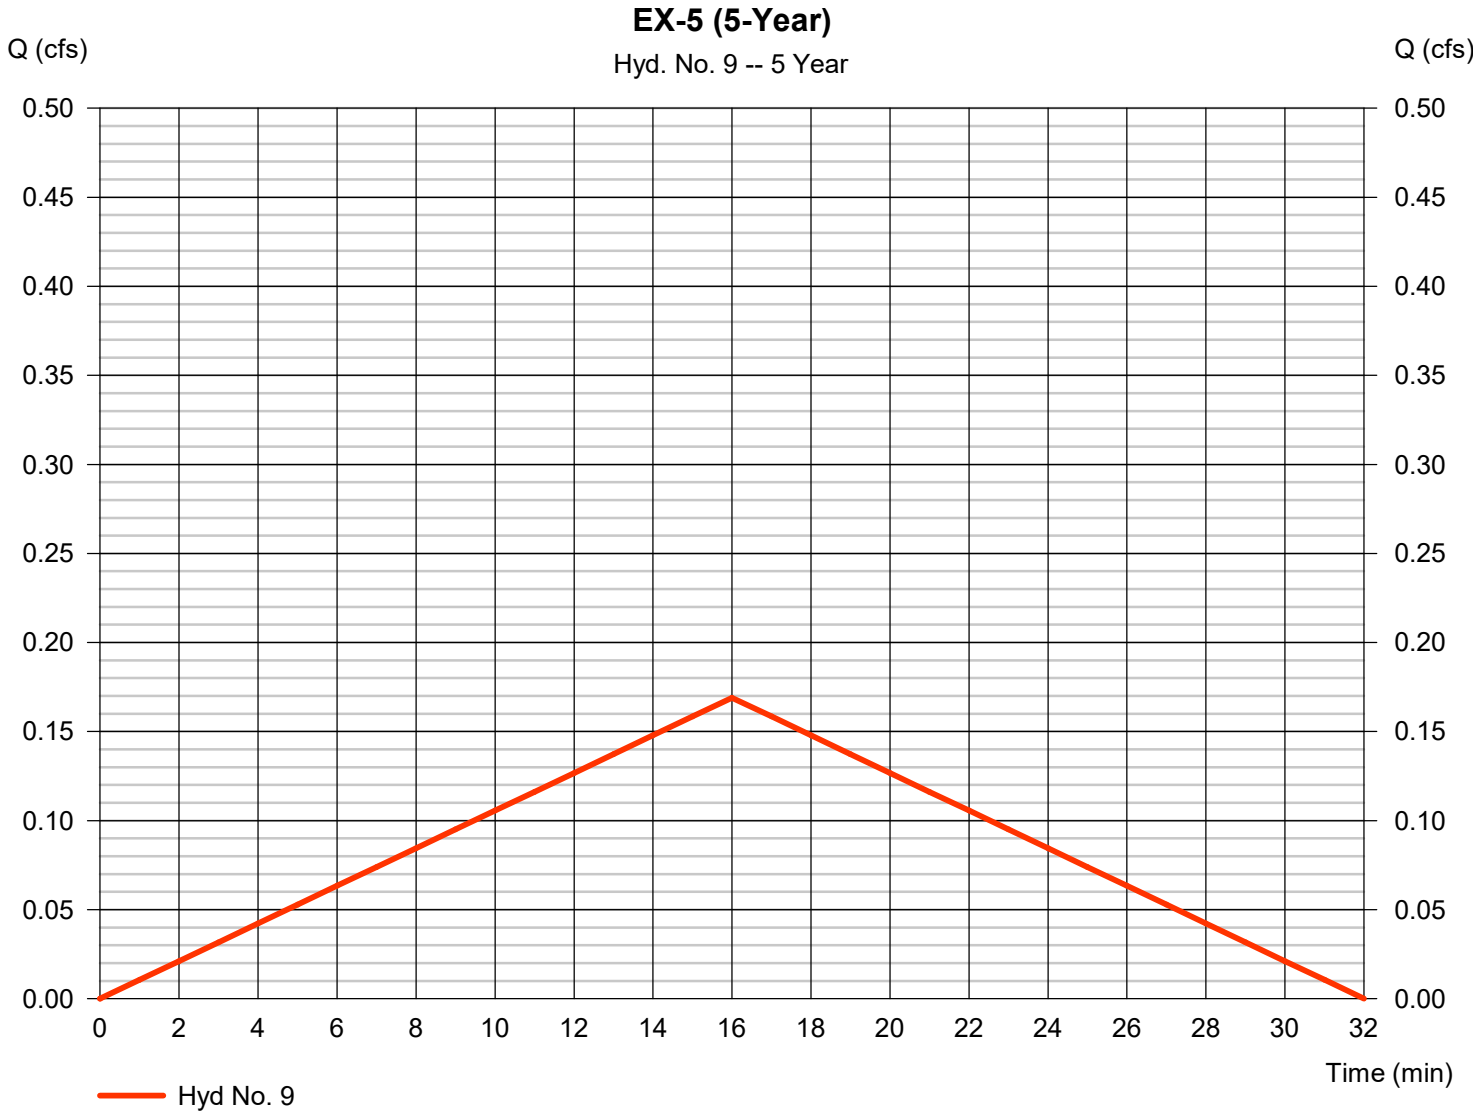

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 10

P-5 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.262 cfs
Storm frequency	= 5 yrs	Time to peak	= 15 min
Time interval	= 1 min	Hyd. volume	= 236 cuft
Drainage area	= 0.560 ac	Runoff coeff.	= 0.12
Intensity	= 3.896 in/hr	Tc by User	= 15.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 11

EX-6 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.164 cfs
Storm frequency	= 5 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 138 cuft
Drainage area	= 0.510 ac	Runoff coeff.	= 0.08
Intensity	= 4.030 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1





# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 12

P-6 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.164 cfs
Storm frequency	= 5 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 138 cuft
Drainage area	= 0.510 ac	Runoff coeff.	= 0.08
Intensity	= 4.030 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

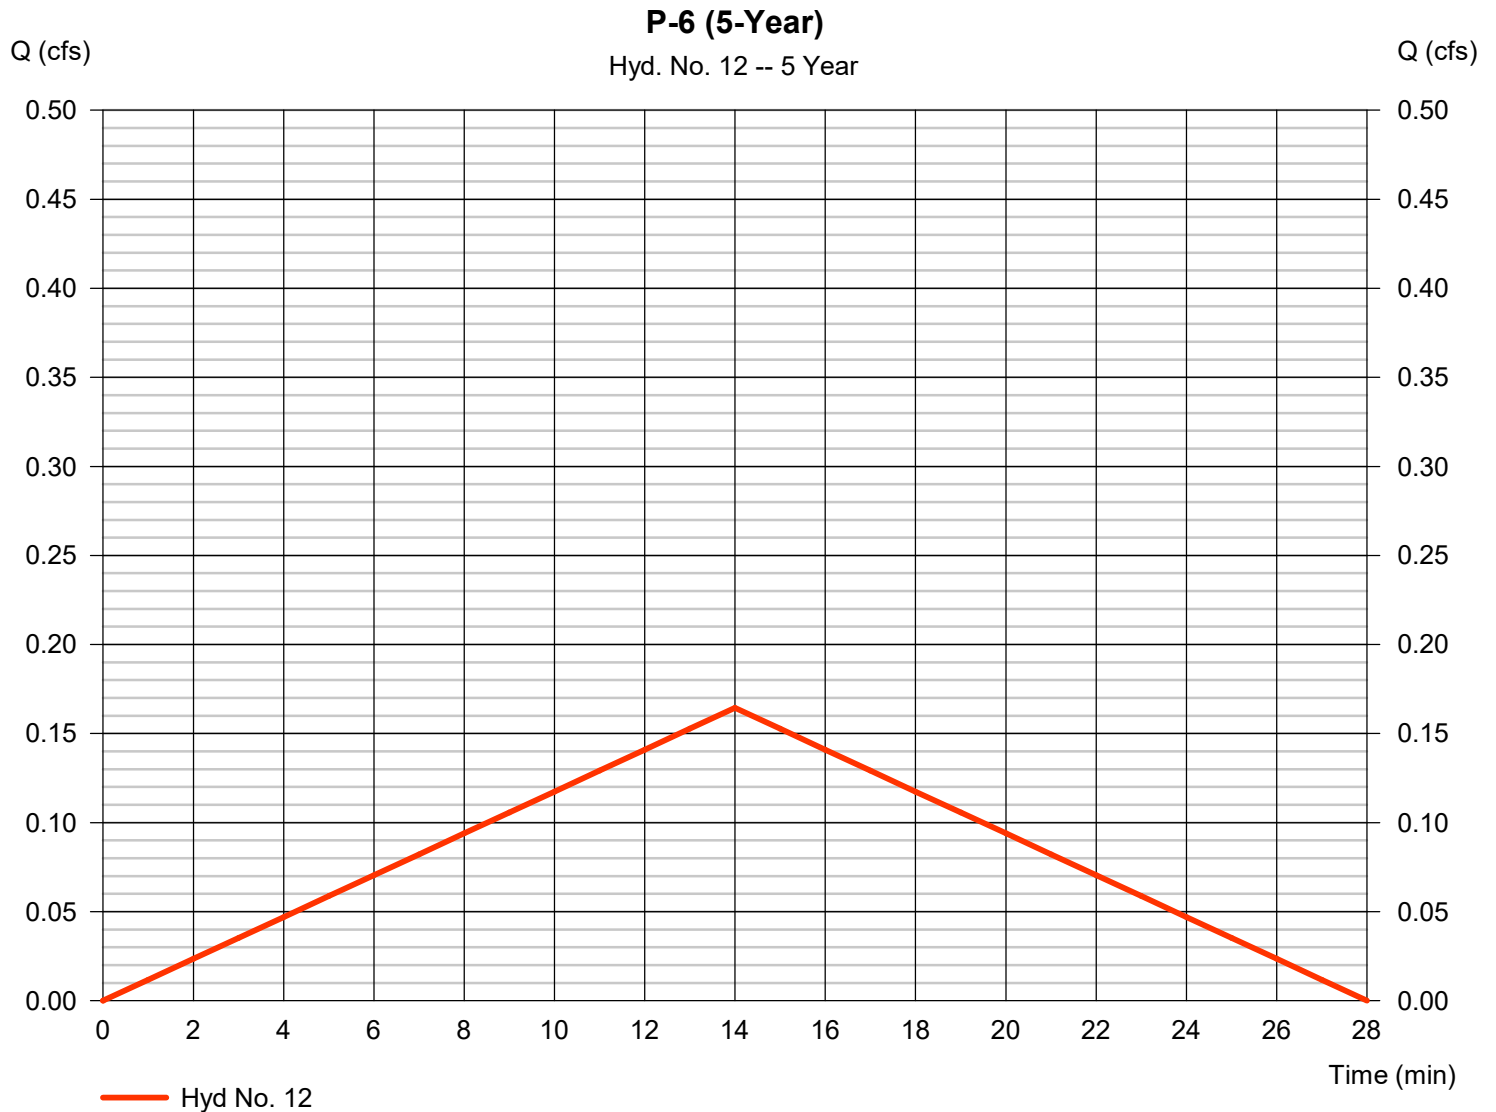


# Hydrograph Report

## Hyd. No. 13

EX-7 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.163 cfs
Storm frequency	= 5 yrs	Time to peak	= 12 min
Time interval	= 1 min	Hyd. volume	= 117 cuft
Drainage area	= 0.470 ac	Runoff coeff.	= 0.08
Intensity	= 4.339 in/hr	Tc by User	= 12.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

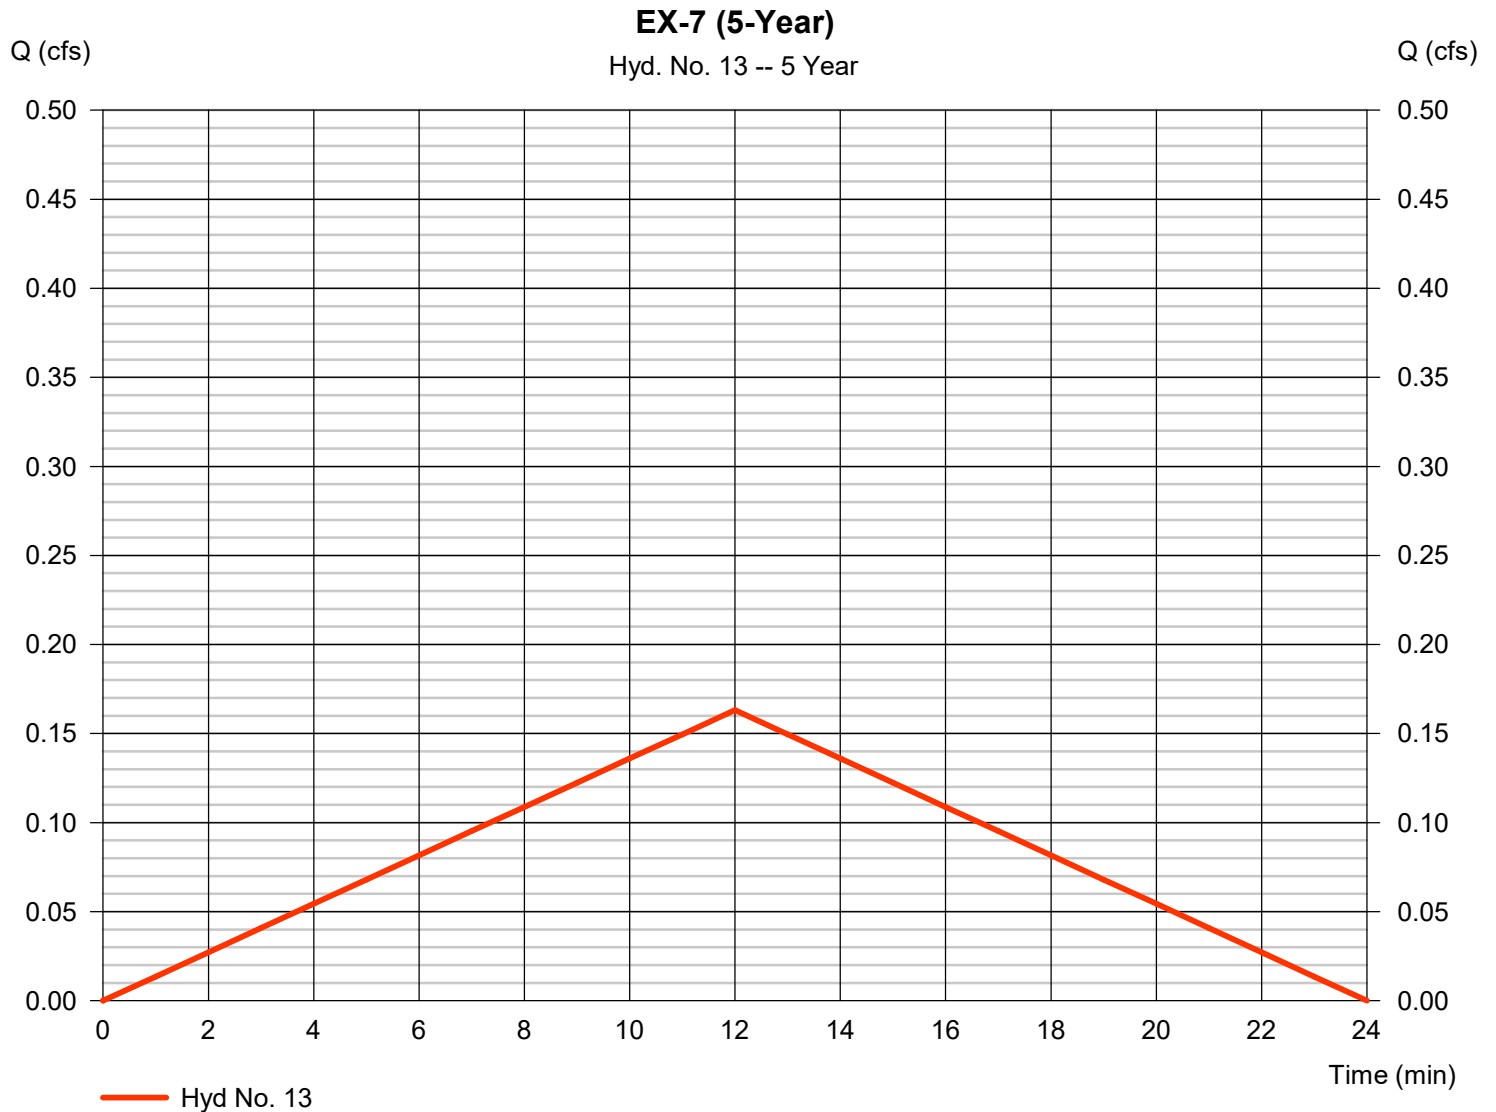

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 14

P-7 (5-Year)

Hydrograph type	= Rational	Peak discharge	= 0.163 cfs
Storm frequency	= 5 yrs	Time to peak	= 12 min
Time interval	= 1 min	Hyd. volume	= 117 cuft
Drainage area	= 0.470 ac	Runoff coeff.	= 0.08
Intensity	= 4.339 in/hr	Tc by User	= 12.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

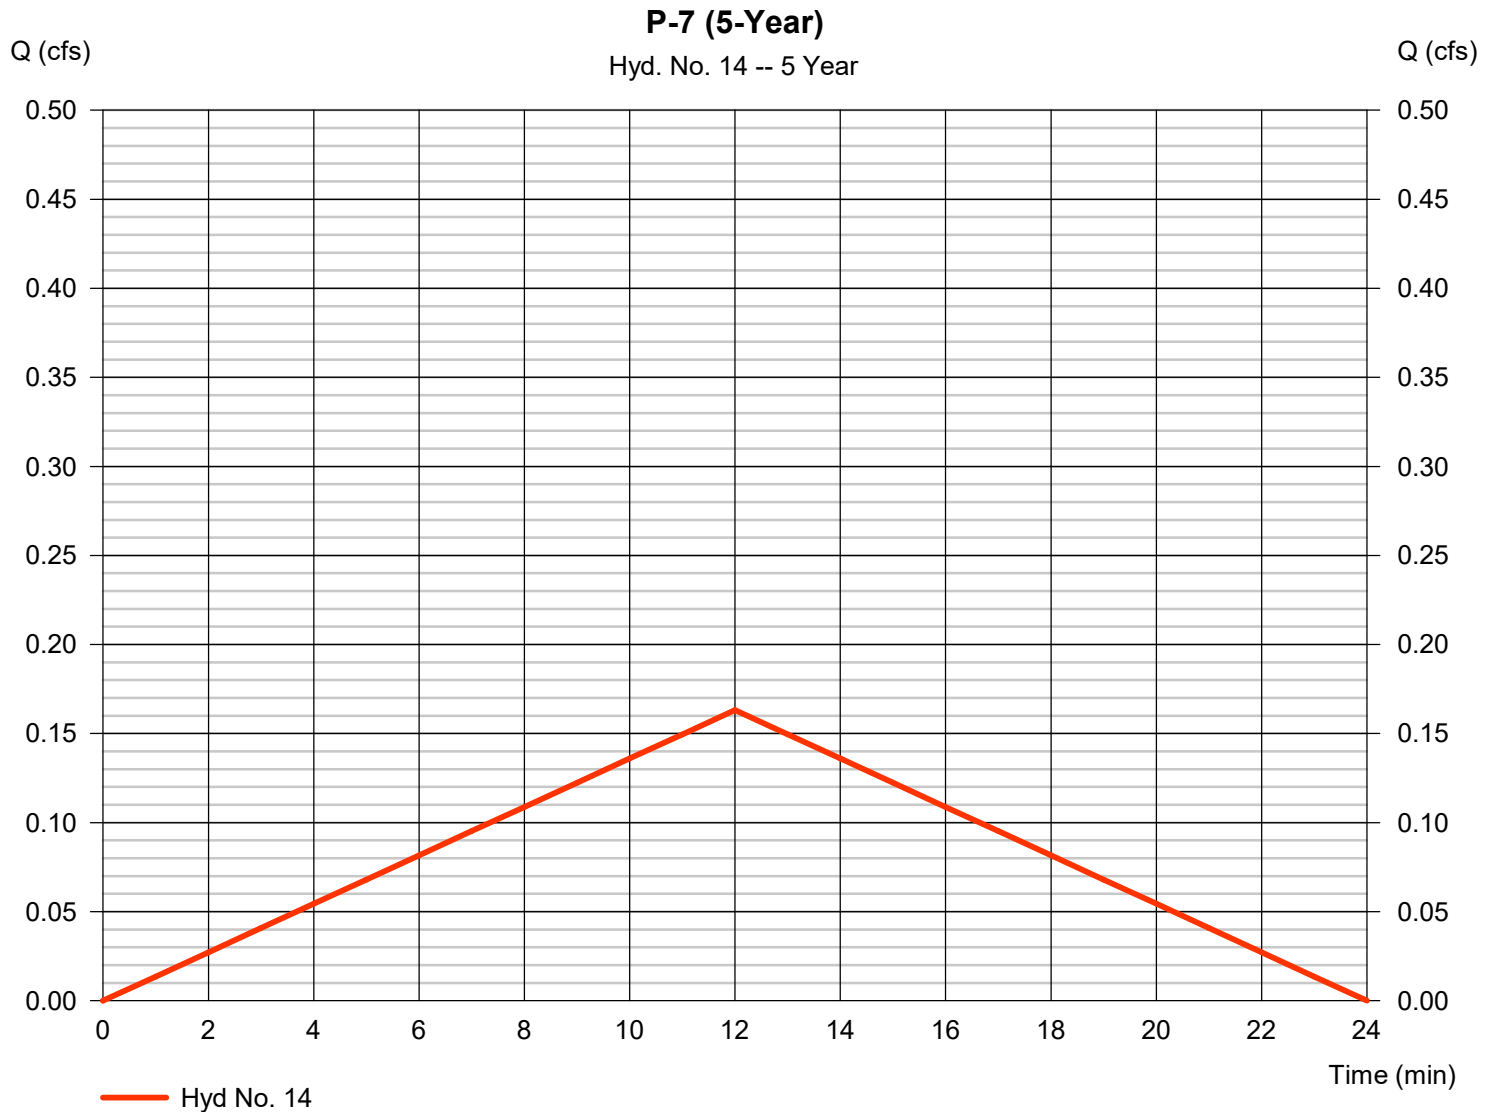


# Hydrograph Report

## Hyd. No. 20

Existing Combined (5-YR)

Hydrograph type = Combine  
Storm frequency = 5 yrs  
Time interval = 1 min  
Inflow hyds. = 18, 19

Peak discharge = 1.569 cfs  
Time to peak = 17 min  
Hyd. volume = 1,781 cuft  
Contrib. drain. area = 0.000 ac

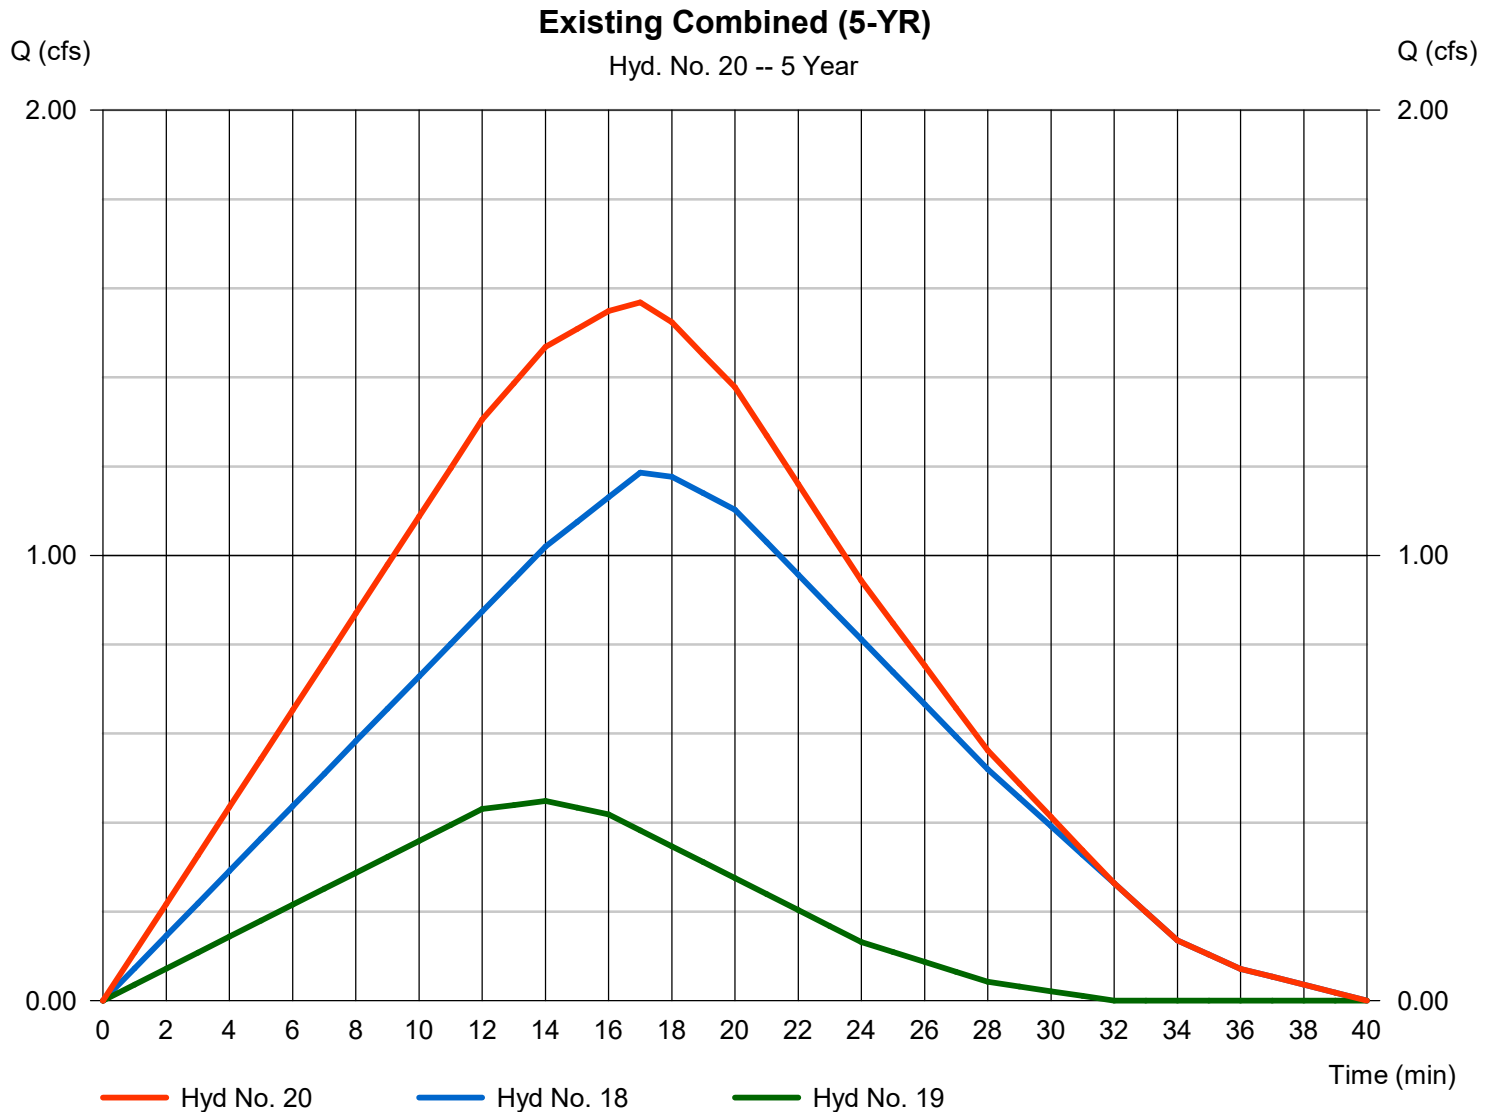

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024


Thursday, 03 / 7 / 2024

## Hyd. No. 17

Proposed Combined (5-YR)

Hydrograph type = Combine  
Storm frequency = 5 yrs  
Time interval = 1 min  
Inflow hyds. = 15, 16

Peak discharge = 2.054 cfs  
Time to peak = 16 min  
Hyd. volume = 2,269 cuft  
Contrib. drain. area = 0.000 ac

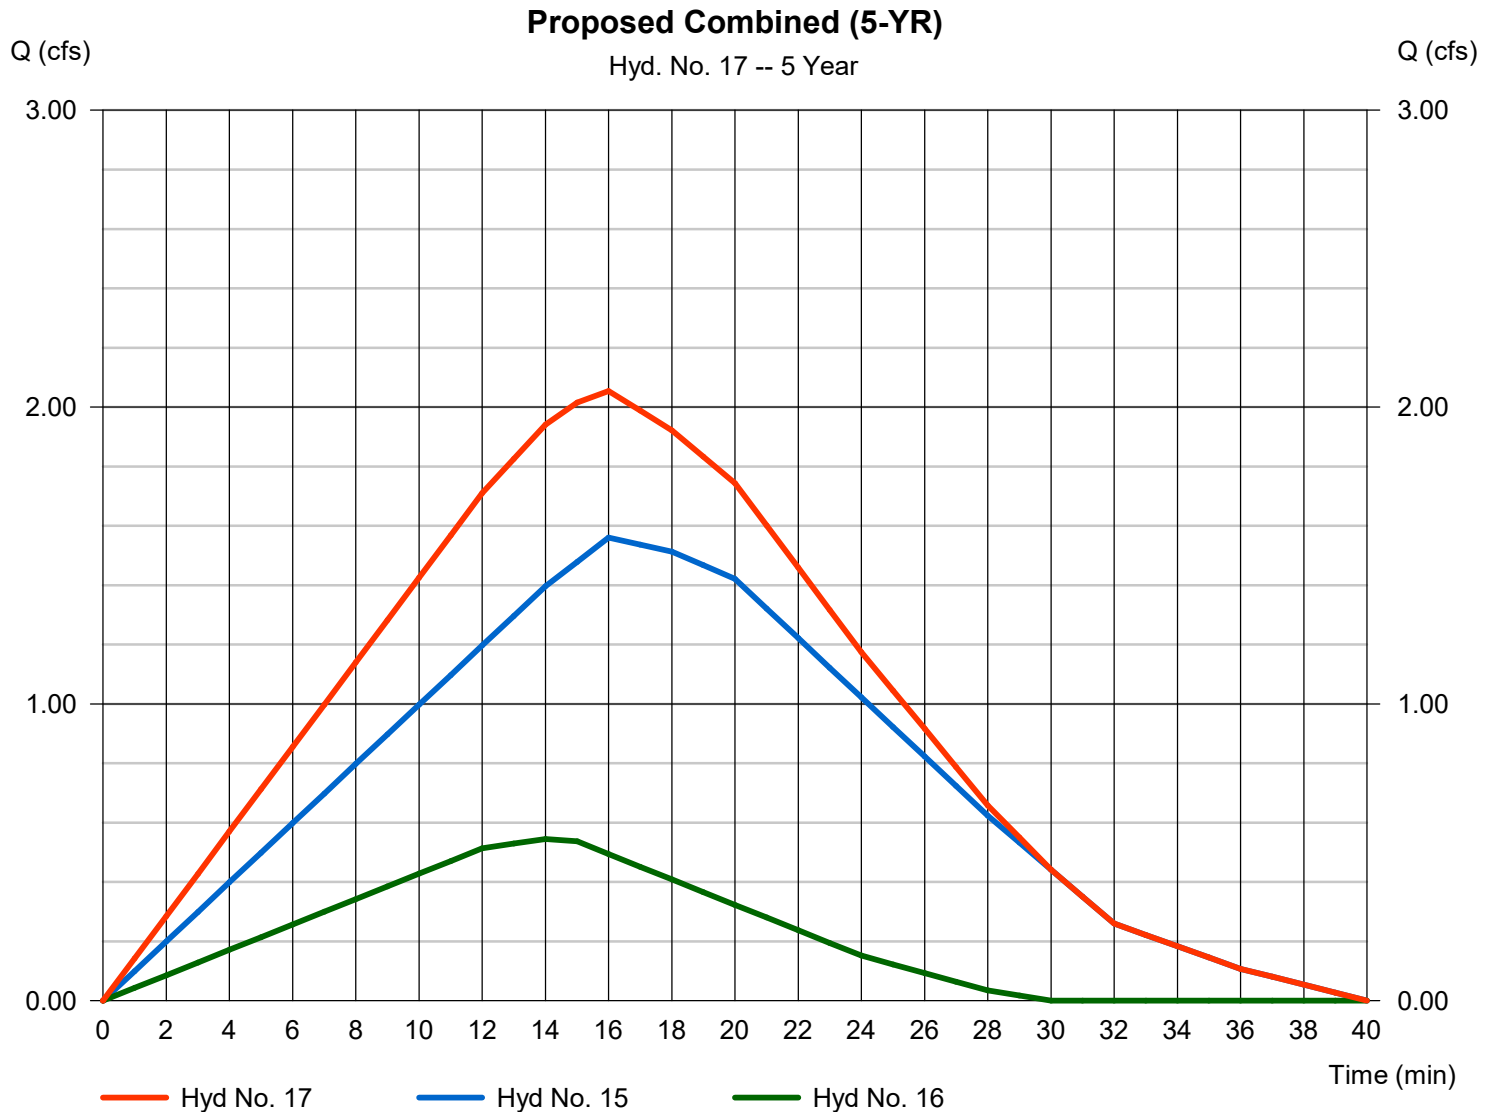

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 1

EX-1 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.694 cfs
Storm frequency	= 100 yrs	Time to peak	= 18 min
Time interval	= 1 min	Hyd. volume	= 1,830 cuft
Drainage area	= 0.710 ac	Runoff coeff.	= 0.36
Intensity	= 6.629 in/hr	Tc by User	= 18.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1




# Hydrograph Report

## Hyd. No. 2

P-1 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.647 cfs
Storm frequency	= 100 yrs	Time to peak	= 18 min
Time interval	= 1 min	Hyd. volume	= 1,779 cuft
Drainage area	= 0.710 ac	Runoff coeff.	= 0.35
Intensity	= 6.629 in/hr	Tc by User	= 18.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

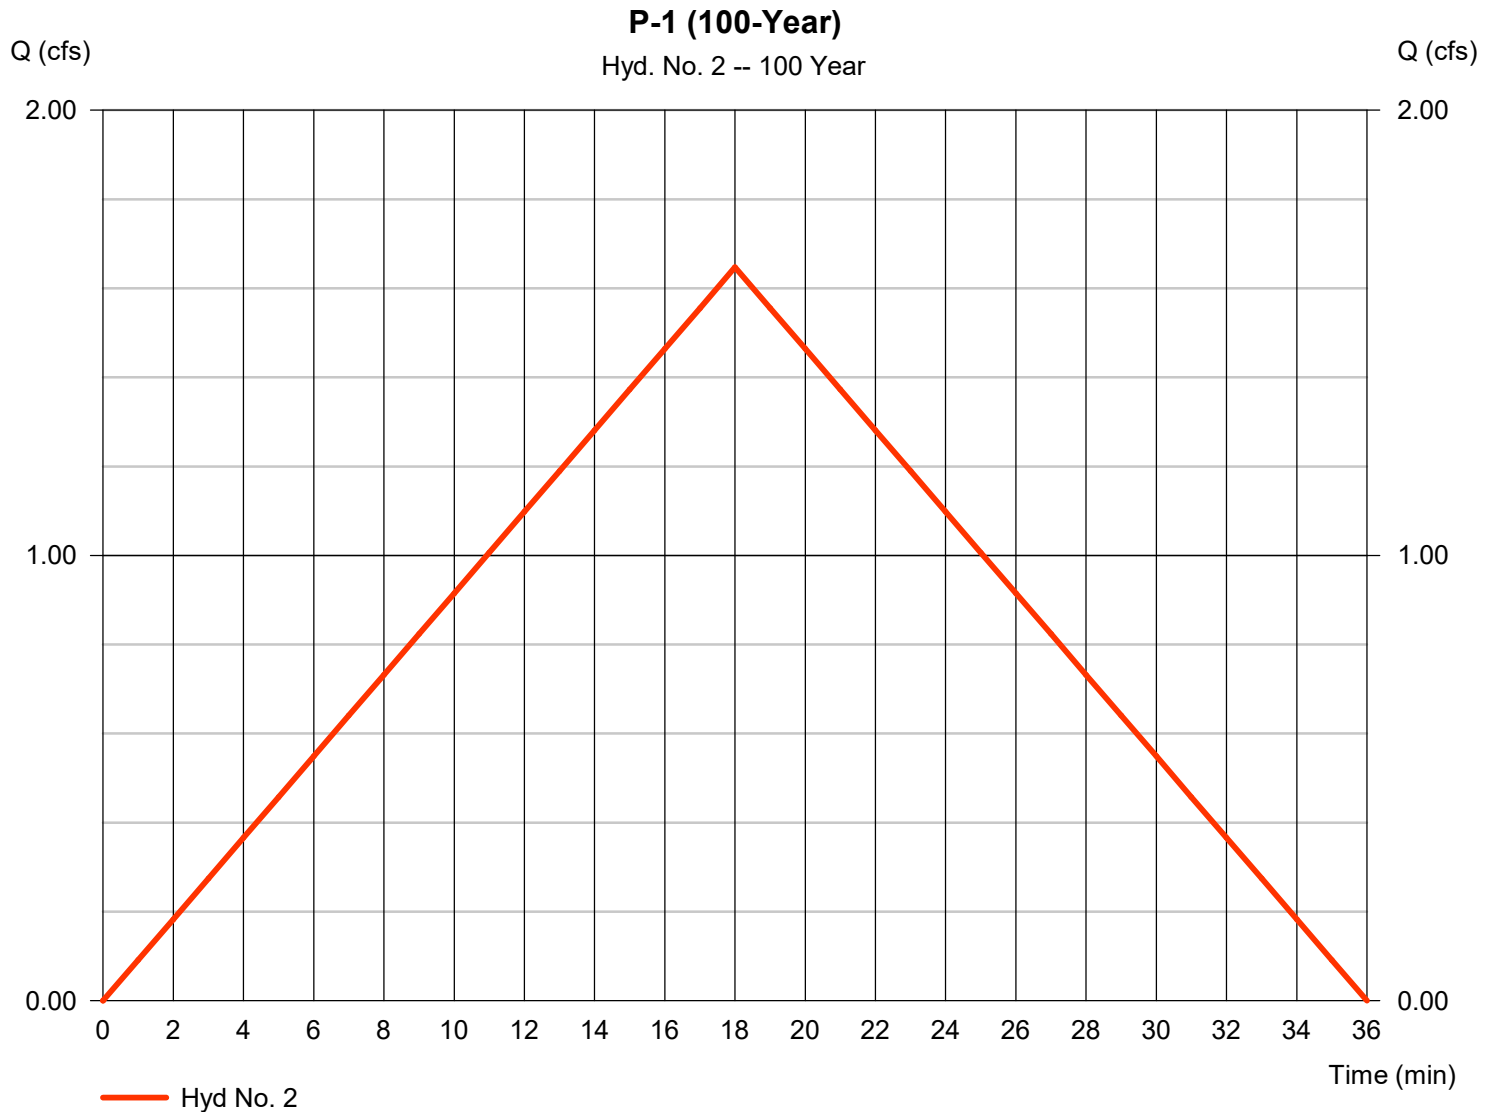

# Hydrograph Report

## Hyd. No. 3

EX-2 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 2.926 cfs
Storm frequency	= 100 yrs	Time to peak	= 20 min
Time interval	= 1 min	Hyd. volume	= 3,512 cuft
Drainage area	= 1.330 ac	Runoff coeff.	= 0.35
Intensity	= 6.286 in/hr	Tc by User	= 20.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1





# Hydrograph Report

## Hyd. No. 4

P-2 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 3.177 cfs
Storm frequency	= 100 yrs	Time to peak	= 20 min
Time interval	= 1 min	Hyd. volume	= 3,813 cuft
Drainage area	= 1.330 ac	Runoff coeff.	= 0.38
Intensity	= 6.286 in/hr	Tc by User	= 20.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1




# Hydrograph Report

## Hyd. No. 5

EX-3 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 0.997 cfs
Storm frequency	= 100 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 837 cuft
Drainage area	= 0.380 ac	Runoff coeff.	= 0.35
Intensity	= 7.494 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

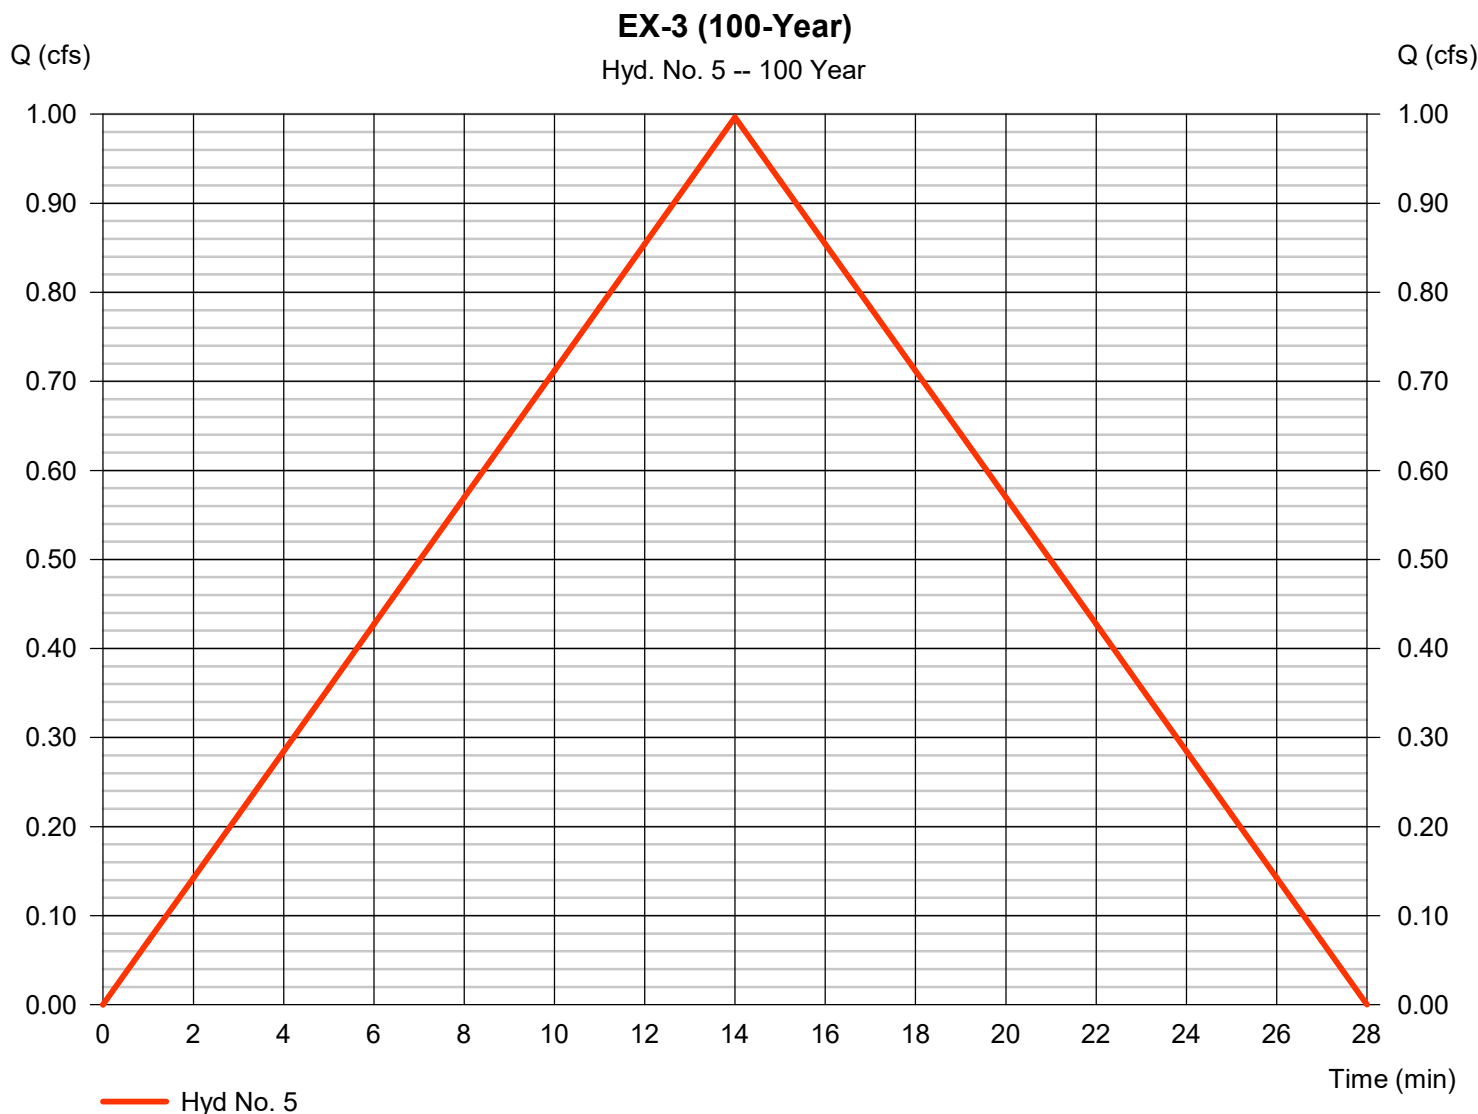

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 6

P-3 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 0.997 cfs
Storm frequency	= 100 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 837 cuft
Drainage area	= 0.380 ac	Runoff coeff.	= 0.35
Intensity	= 7.494 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1



# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 7

EX-4 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 4.463 cfs
Storm frequency	= 100 yrs	Time to peak	= 17 min
Time interval	= 1 min	Hyd. volume	= 4,553 cuft
Drainage area	= 1.870 ac	Runoff coeff.	= 0.35
Intensity	= 6.819 in/hr	Tc by User	= 17.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

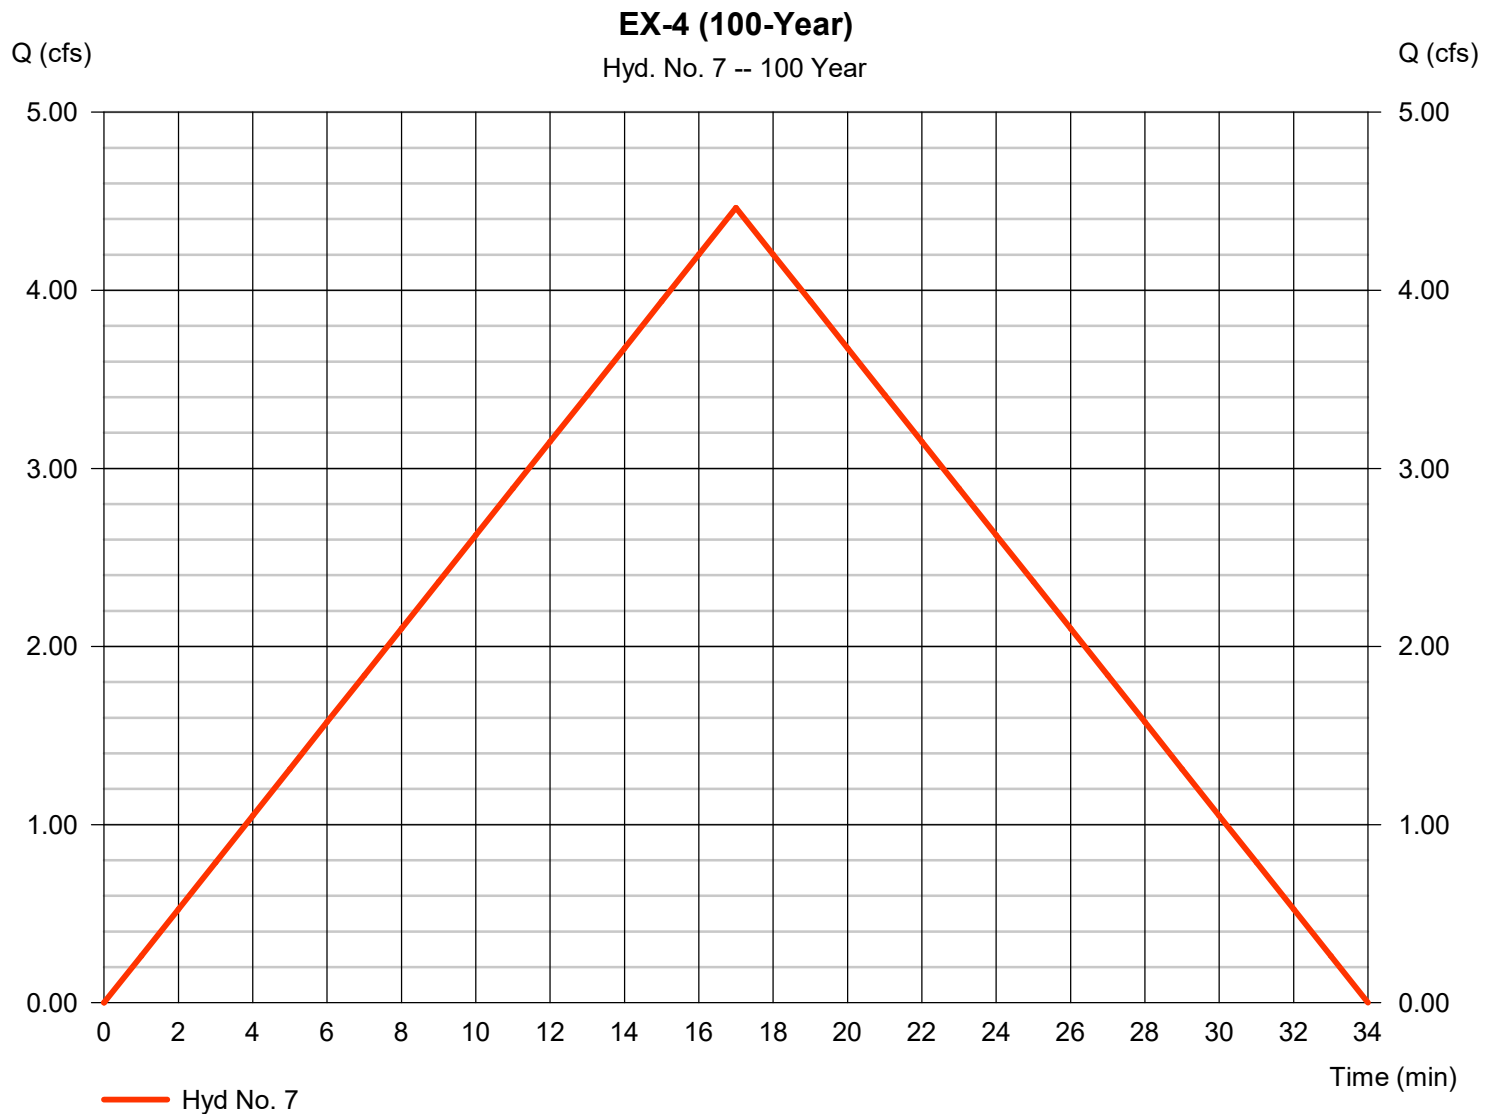


# Hydrograph Report

## Hyd. No. 8

P-4 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 4.993 cfs
Storm frequency	= 100 yrs	Time to peak	= 16 min
Time interval	= 1 min	Hyd. volume	= 4,793 cuft
Drainage area	= 1.870 ac	Runoff coeff.	= 0.38
Intensity	= 7.026 in/hr	Tc by User	= 16.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

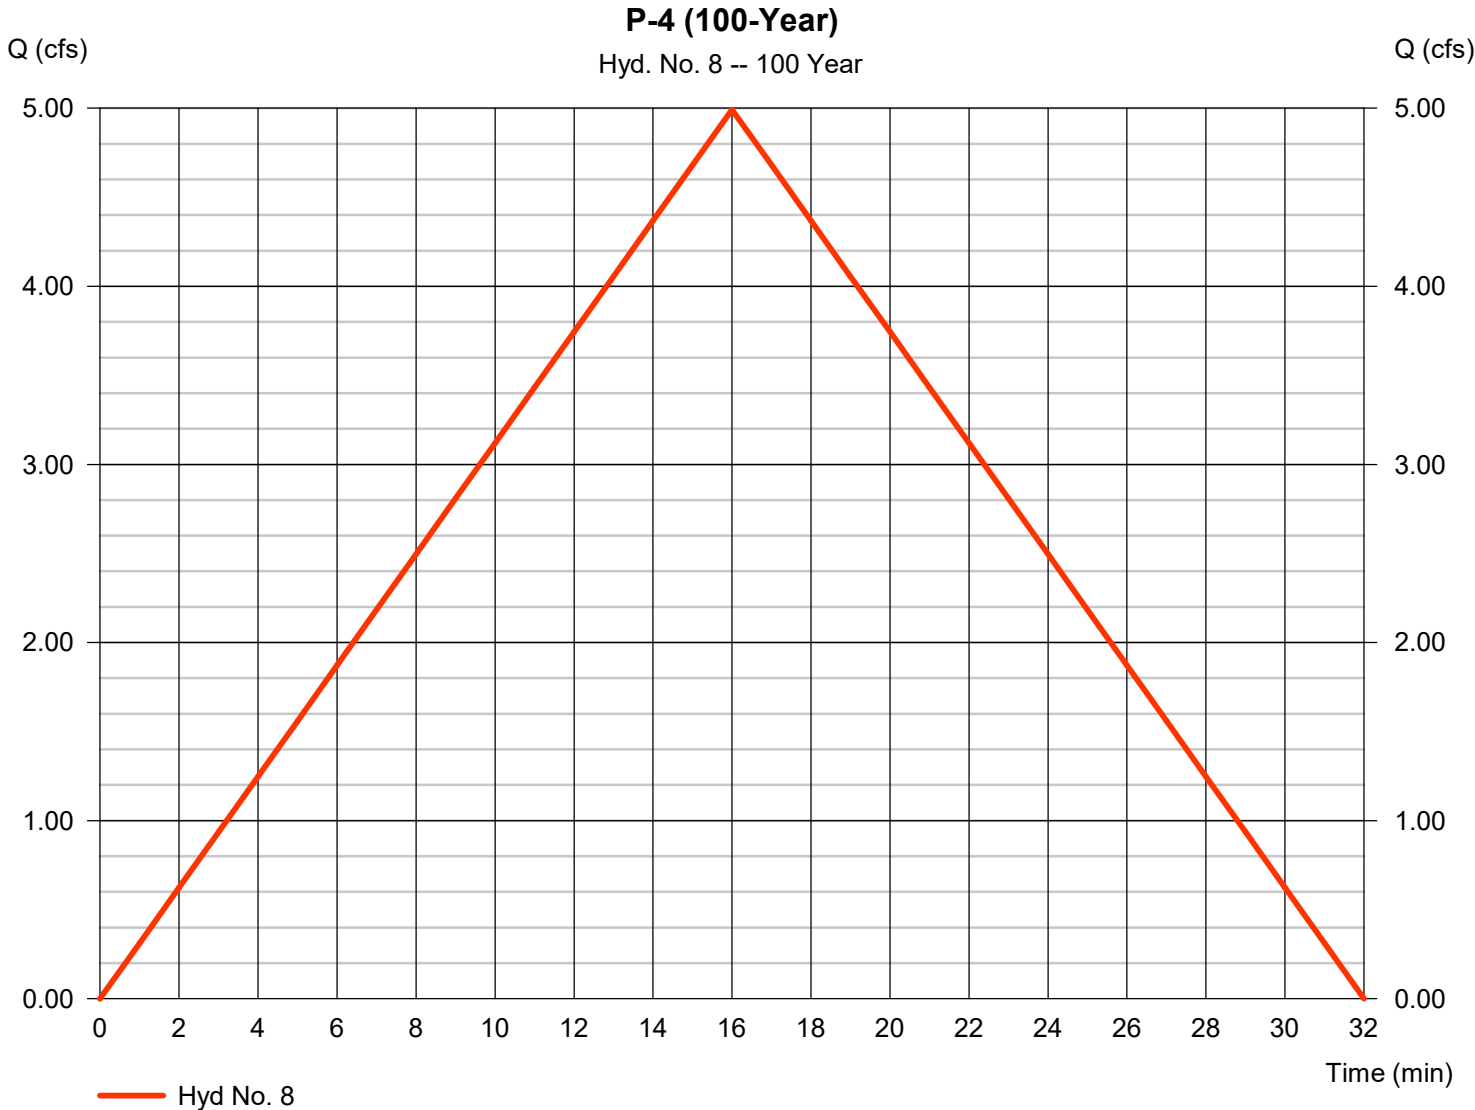


# Hydrograph Report

## Hyd. No. 9

EX-5 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.377 cfs
Storm frequency	= 100 yrs	Time to peak	= 16 min
Time interval	= 1 min	Hyd. volume	= 1,322 cuft
Drainage area	= 0.560 ac	Runoff coeff.	= 0.35
Intensity	= 7.026 in/hr	Tc by User	= 16.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

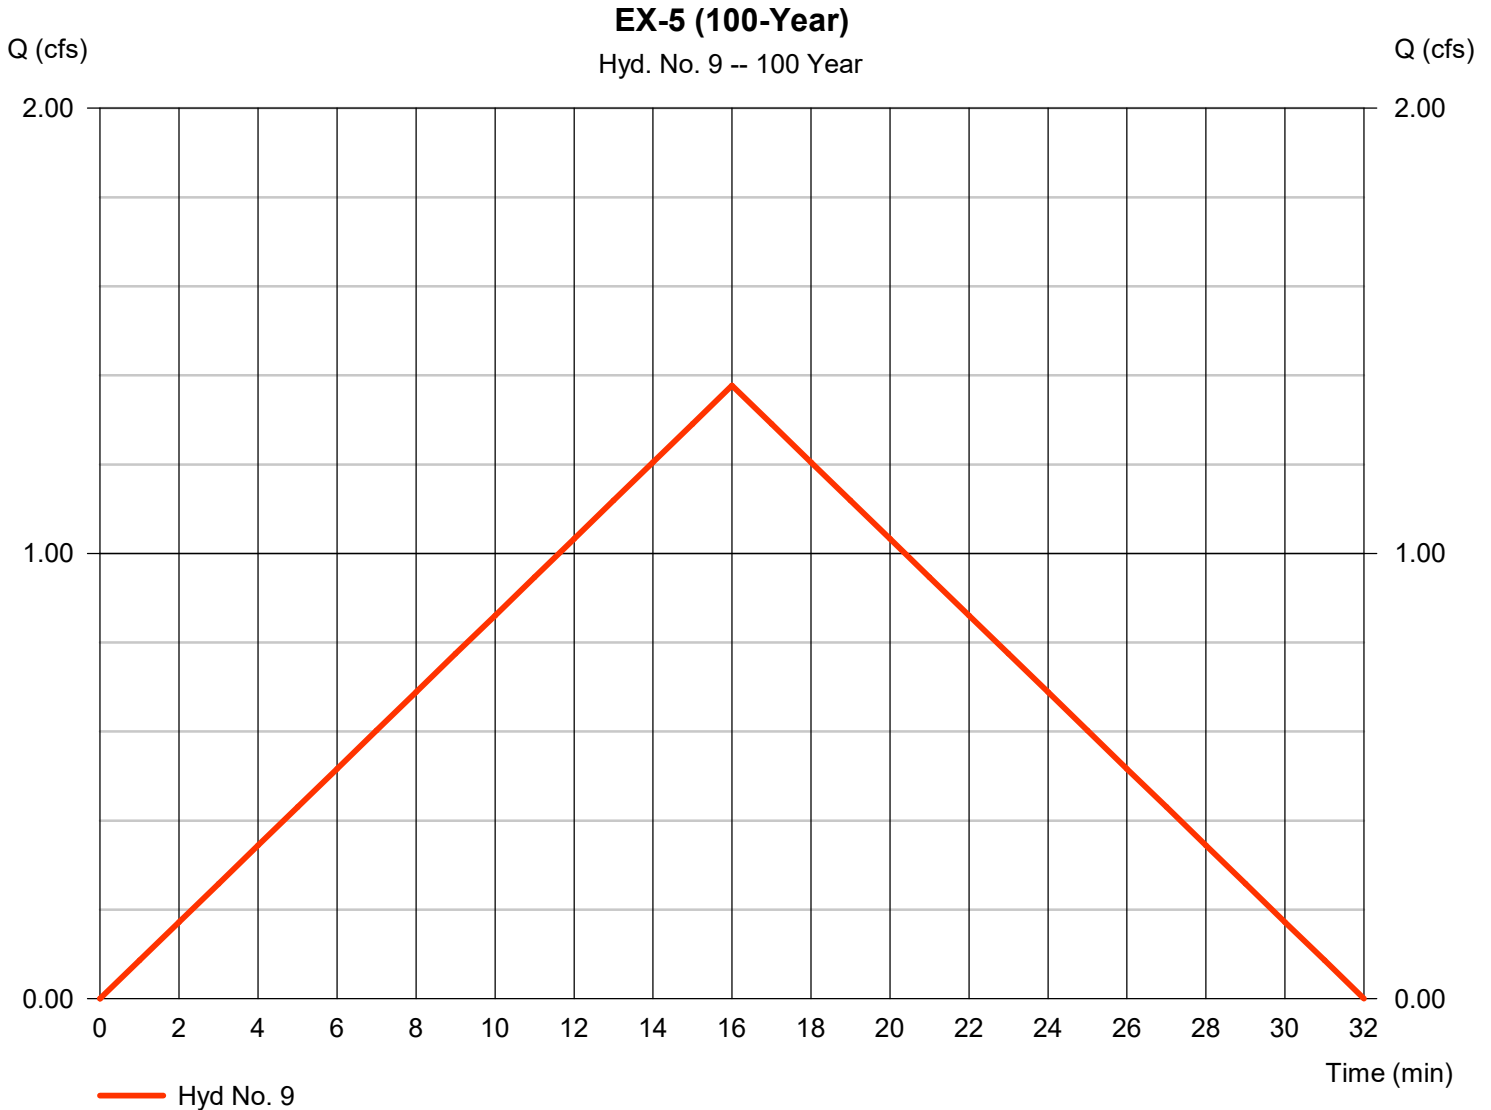

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024

Thursday, 03 / 7 / 2024

## Hyd. No. 10

P-5 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.543 cfs
Storm frequency	= 100 yrs	Time to peak	= 15 min
Time interval	= 1 min	Hyd. volume	= 1,389 cuft
Drainage area	= 0.560 ac	Runoff coeff.	= 0.38
Intensity	= 7.250 in/hr	Tc by User	= 15.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

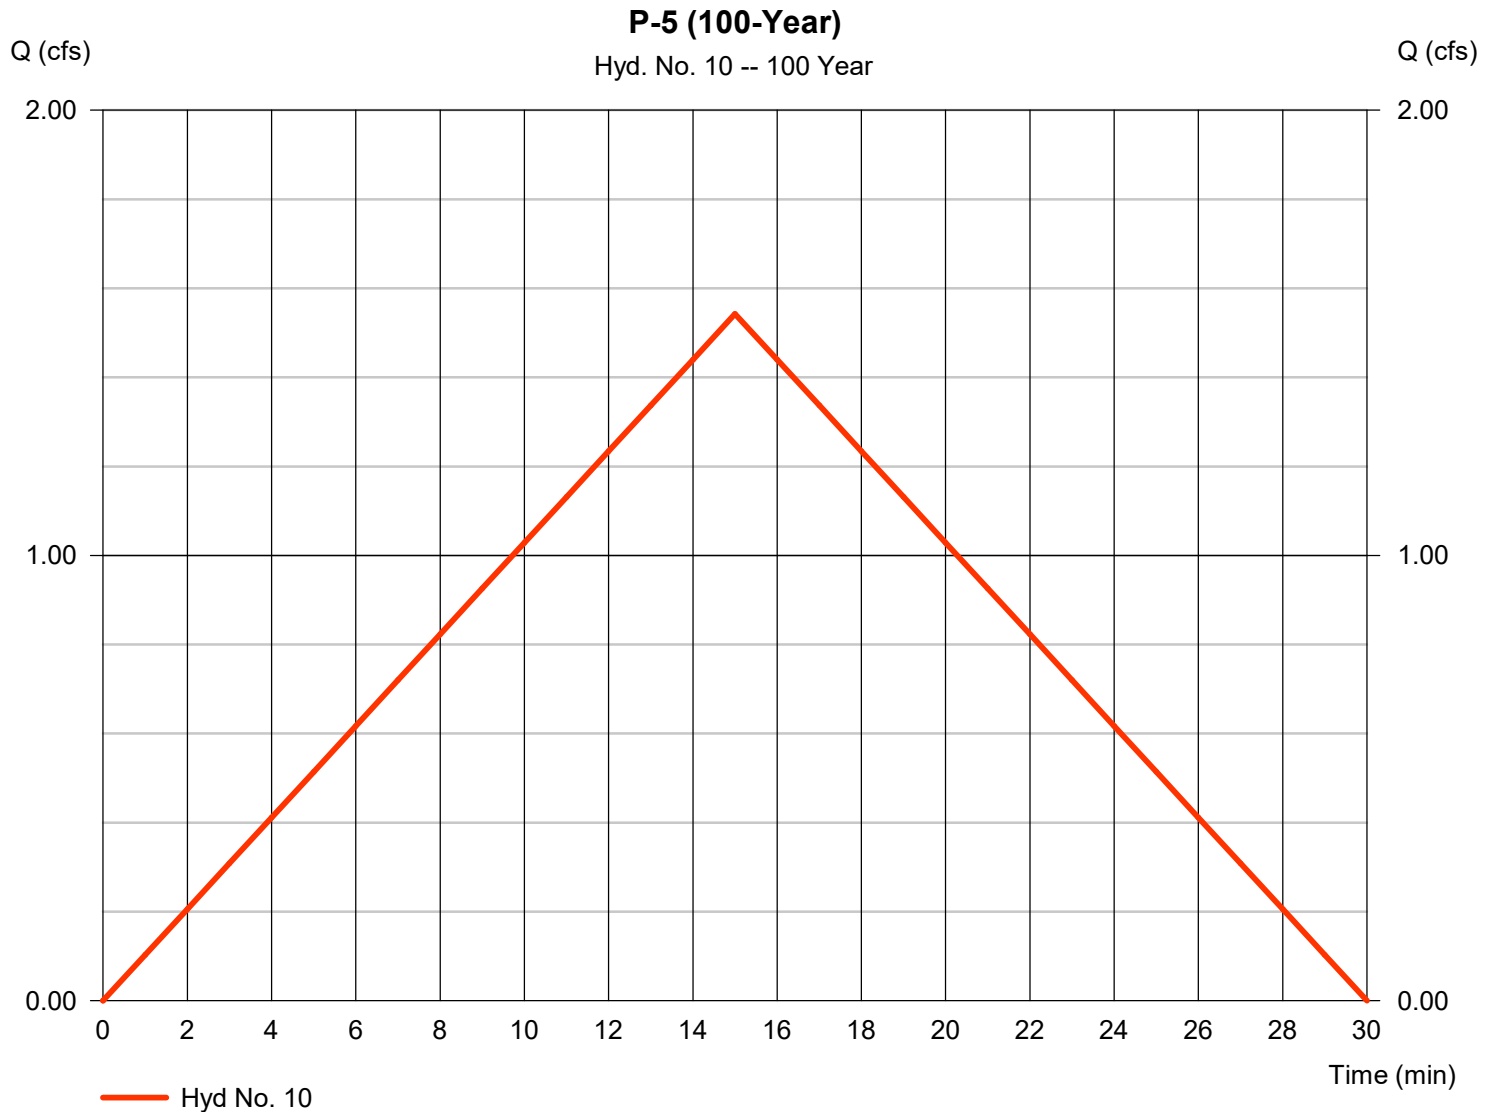


# Hydrograph Report

## Hyd. No. 11

EX-6 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.338 cfs
Storm frequency	= 100 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 1,124 cuft
Drainage area	= 0.510 ac	Runoff coeff.	= 0.35
Intensity	= 7.494 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

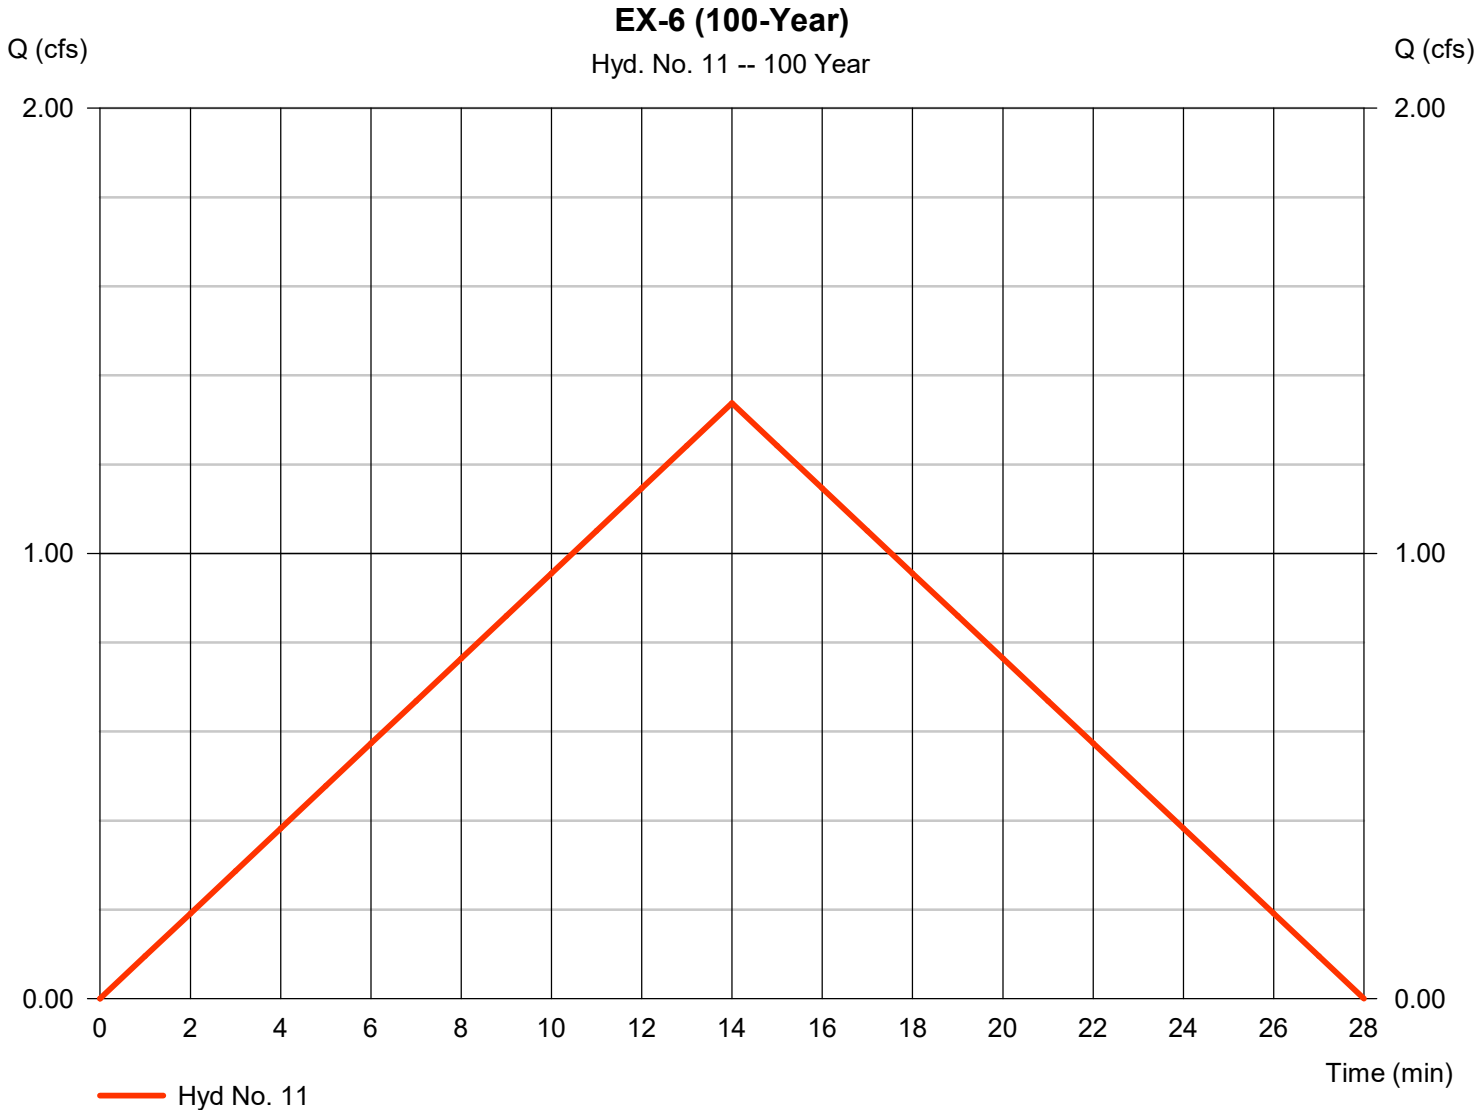




# Hydrograph Report

## Hyd. No. 12

P-6 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.338 cfs
Storm frequency	= 100 yrs	Time to peak	= 14 min
Time interval	= 1 min	Hyd. volume	= 1,124 cuft
Drainage area	= 0.510 ac	Runoff coeff.	= 0.35
Intensity	= 7.494 in/hr	Tc by User	= 14.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

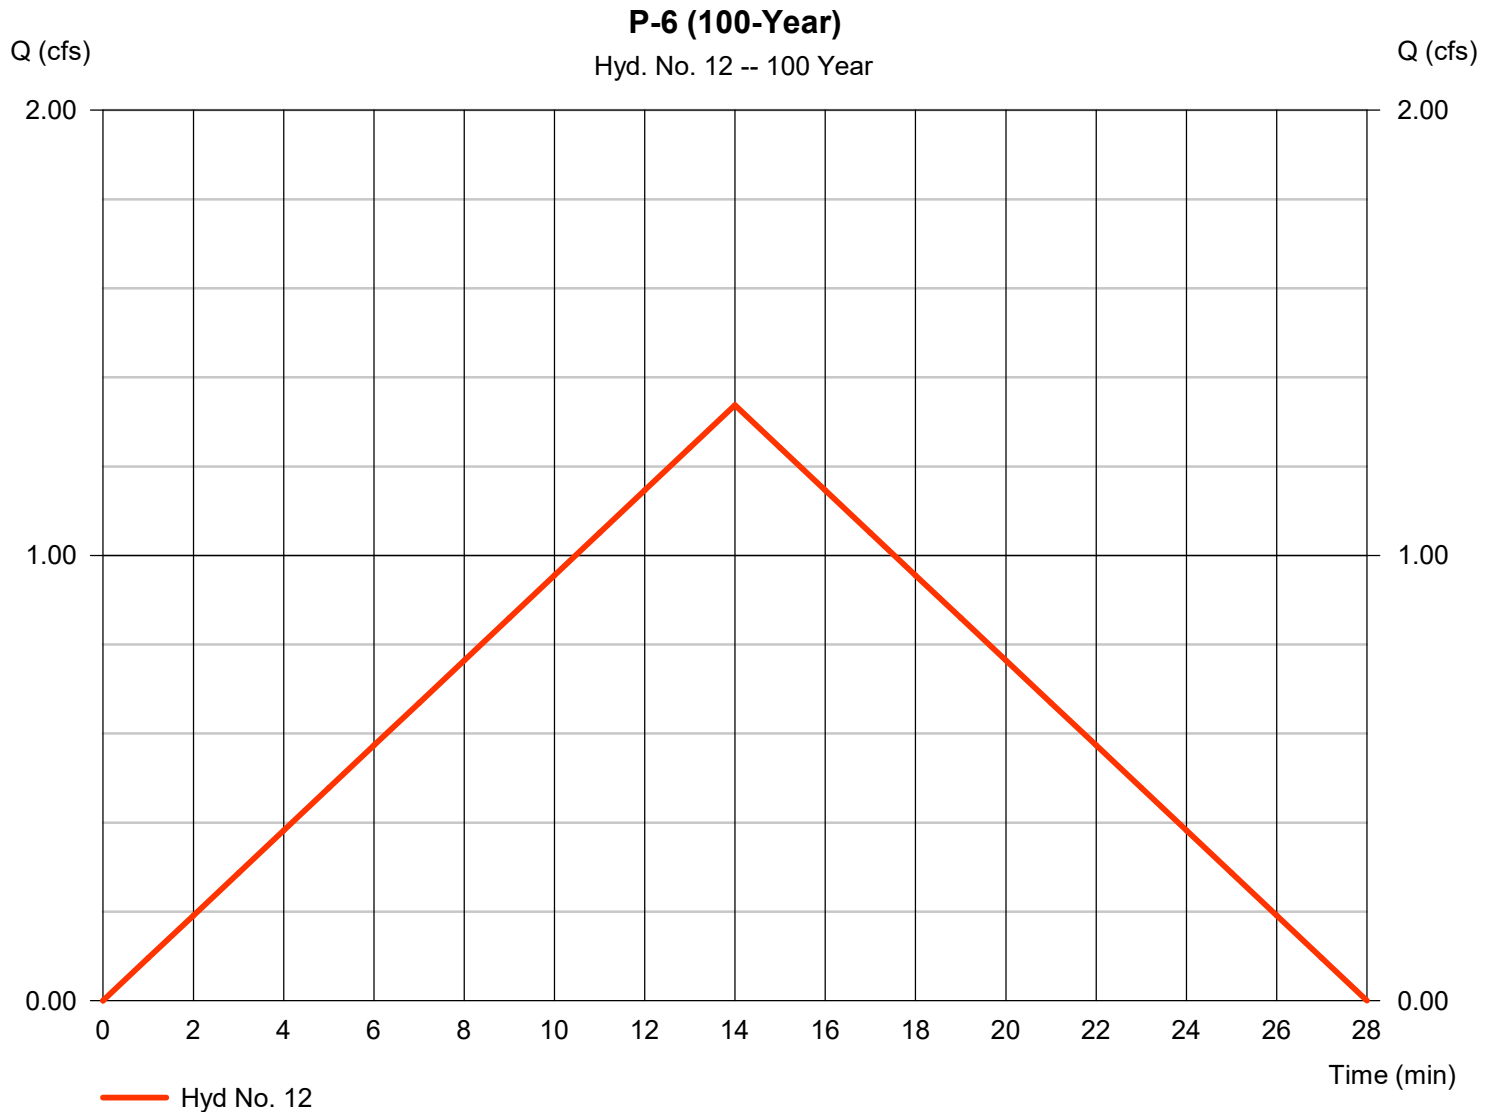


# Hydrograph Report

## Hyd. No. 13

EX-7 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.325 cfs
Storm frequency	= 100 yrs	Time to peak	= 12 min
Time interval	= 1 min	Hyd. volume	= 954 cuft
Drainage area	= 0.470 ac	Runoff coeff.	= 0.35
Intensity	= 8.057 in/hr	Tc by User	= 12.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

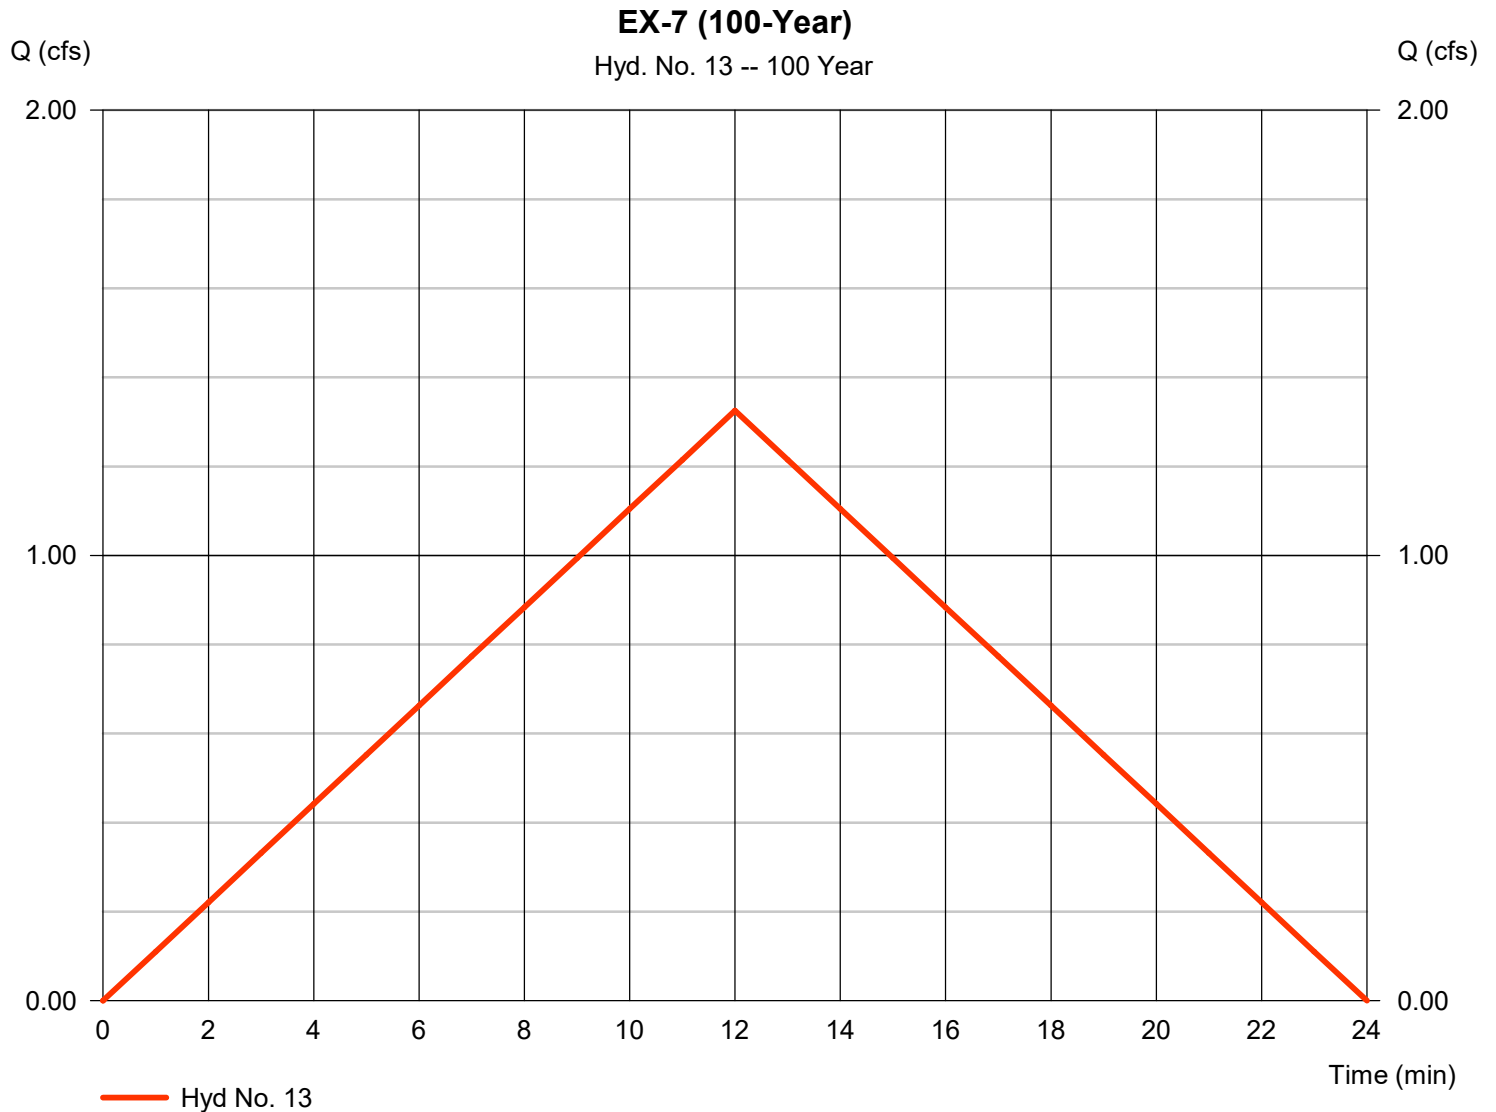


# Hydrograph Report

## Hyd. No. 14

P-7 (100-Year)

Hydrograph type	= Rational	Peak discharge	= 1.325 cfs
Storm frequency	= 100 yrs	Time to peak	= 12 min
Time interval	= 1 min	Hyd. volume	= 954 cuft
Drainage area	= 0.470 ac	Runoff coeff.	= 0.35
Intensity	= 8.057 in/hr	Tc by User	= 12.00 min
IDF Curve	= Colorado Springs.IDF	Asc/Rec limb fact	= 1/1

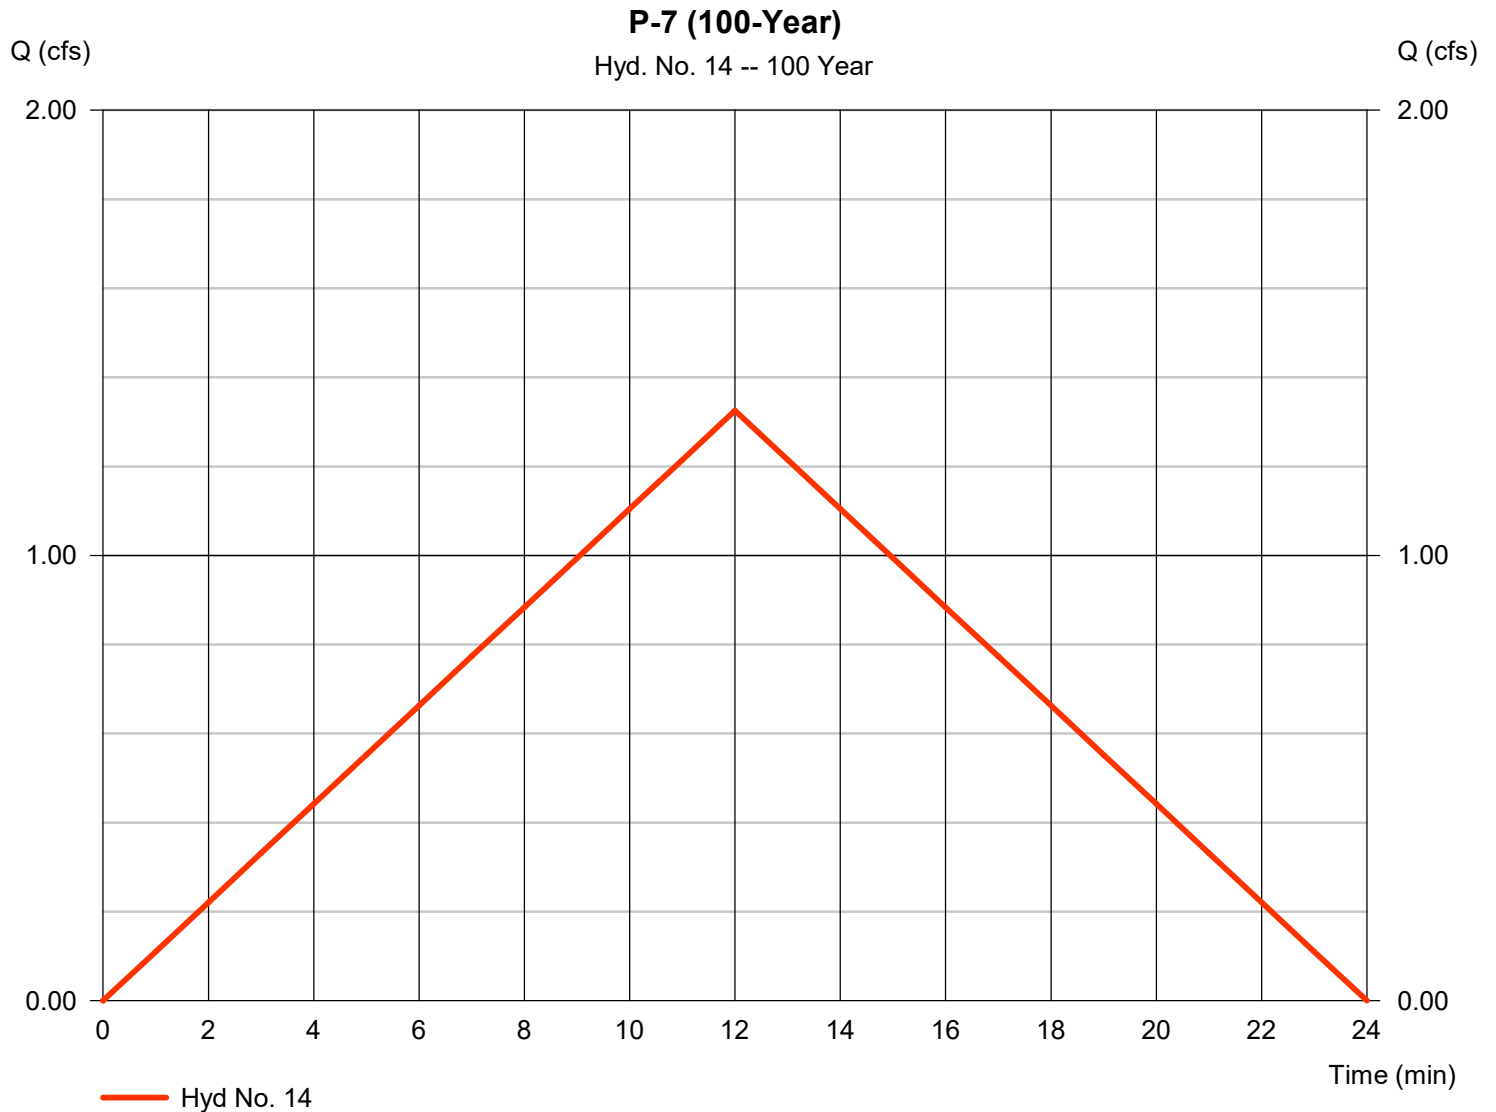


# Hydrograph Report

## Hyd. No. 17

Existing Combined (100-YR)

Hydrograph type	= Combine	Peak discharge	= 12.45 cfs
Storm frequency	= 100 yrs	Time to peak	= 17 min
Time interval	= 1 min	Hyd. volume	= 14,131 cuft
Inflow hyds.	= 15, 16	Contrib. drain. area	= 0.000 ac

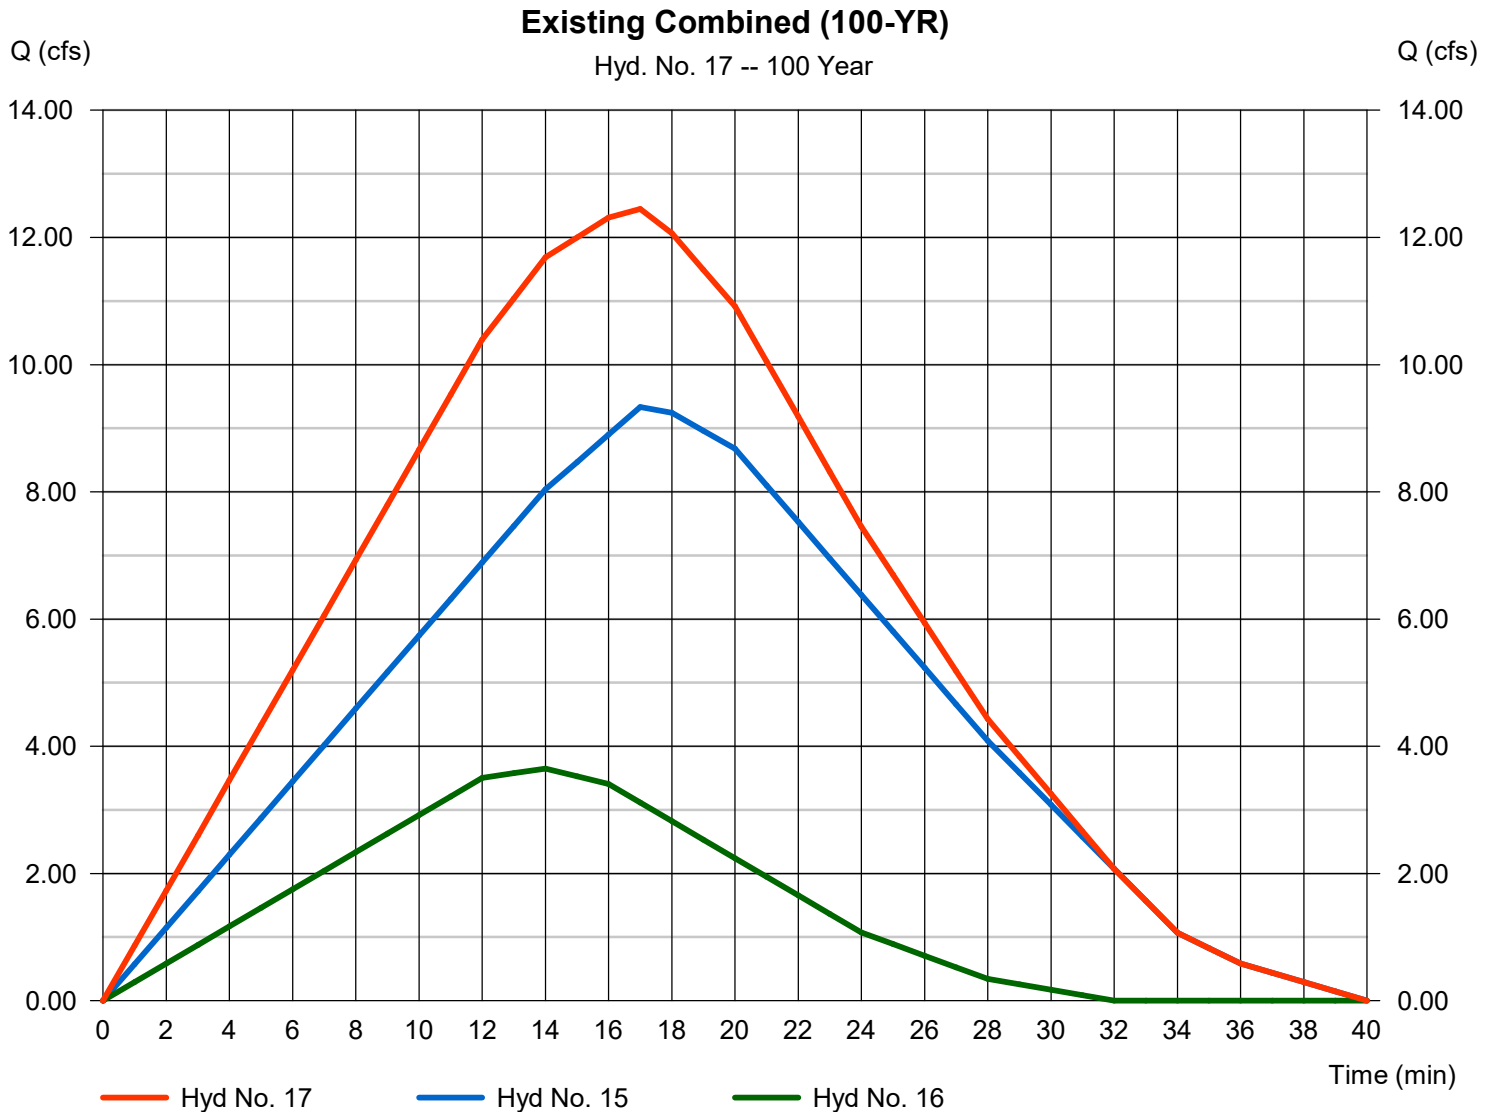

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2024


Thursday, 03 / 7 / 2024

## Hyd. No. 20

Proposed Combined (100-YR)

Hydrograph type = Combine  
Storm frequency = 100 yrs  
Time interval = 1 min  
Inflow hyds. = 18, 19

Peak discharge = 13.32 cfs  
Time to peak = 16 min  
Hyd. volume = 14,688 cuft  
Contrib. drain. area = 0.000 ac

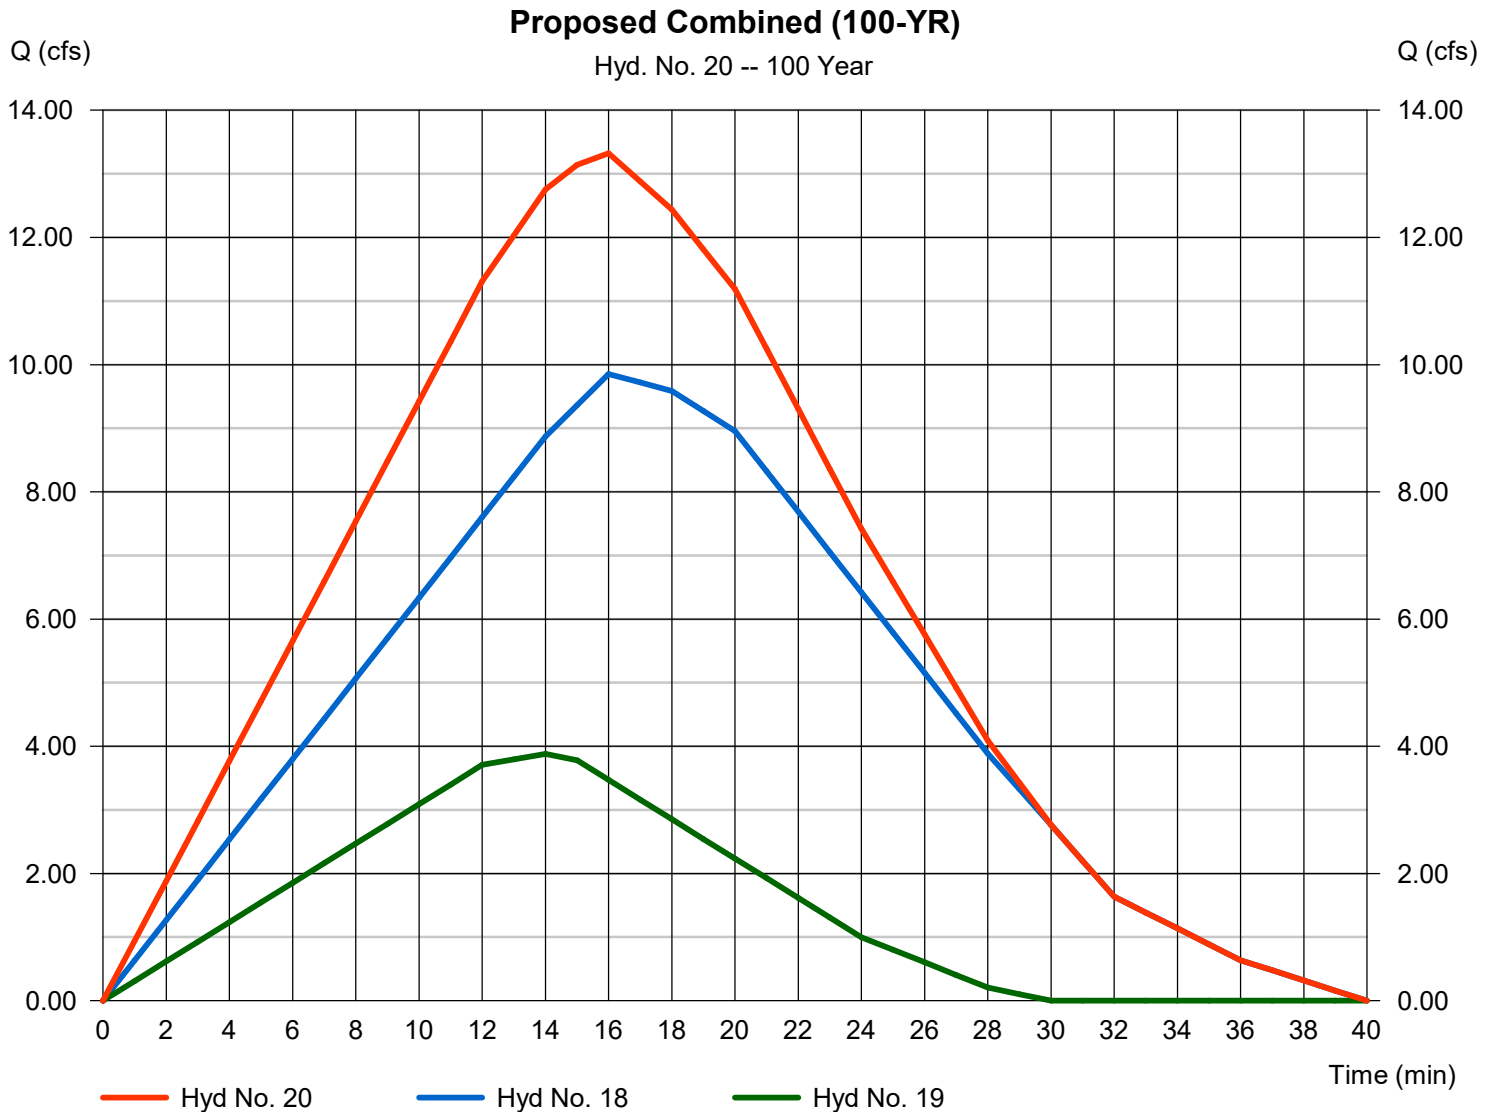

# DRAINAGE MAPS

---

DOLES LIVING TRUST  
SCH 520600030  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

ELLEN KLEIN LIVING TRUST  
SCH 520600029  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

DAVID J. BRADBURY  
SCH 520600017  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

DONALD R. SPURR  
SCH 520600096  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

DONALD R. SPURR  
SCH 520600096  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

MARY PIRRONE  
SCH 520600051  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL


PHILLIP M. SAMUELSON  
SCH 520600053  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

RANDY BUCKLEY  
SCH 520600107  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

ERIC F. MORROW  
SCH 520600054  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

ROBERT C. METZGER JR  
SCH 520600050  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

CURRENT OWNER IDENTITY PROTECTED  
REC. NO. 213064397  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

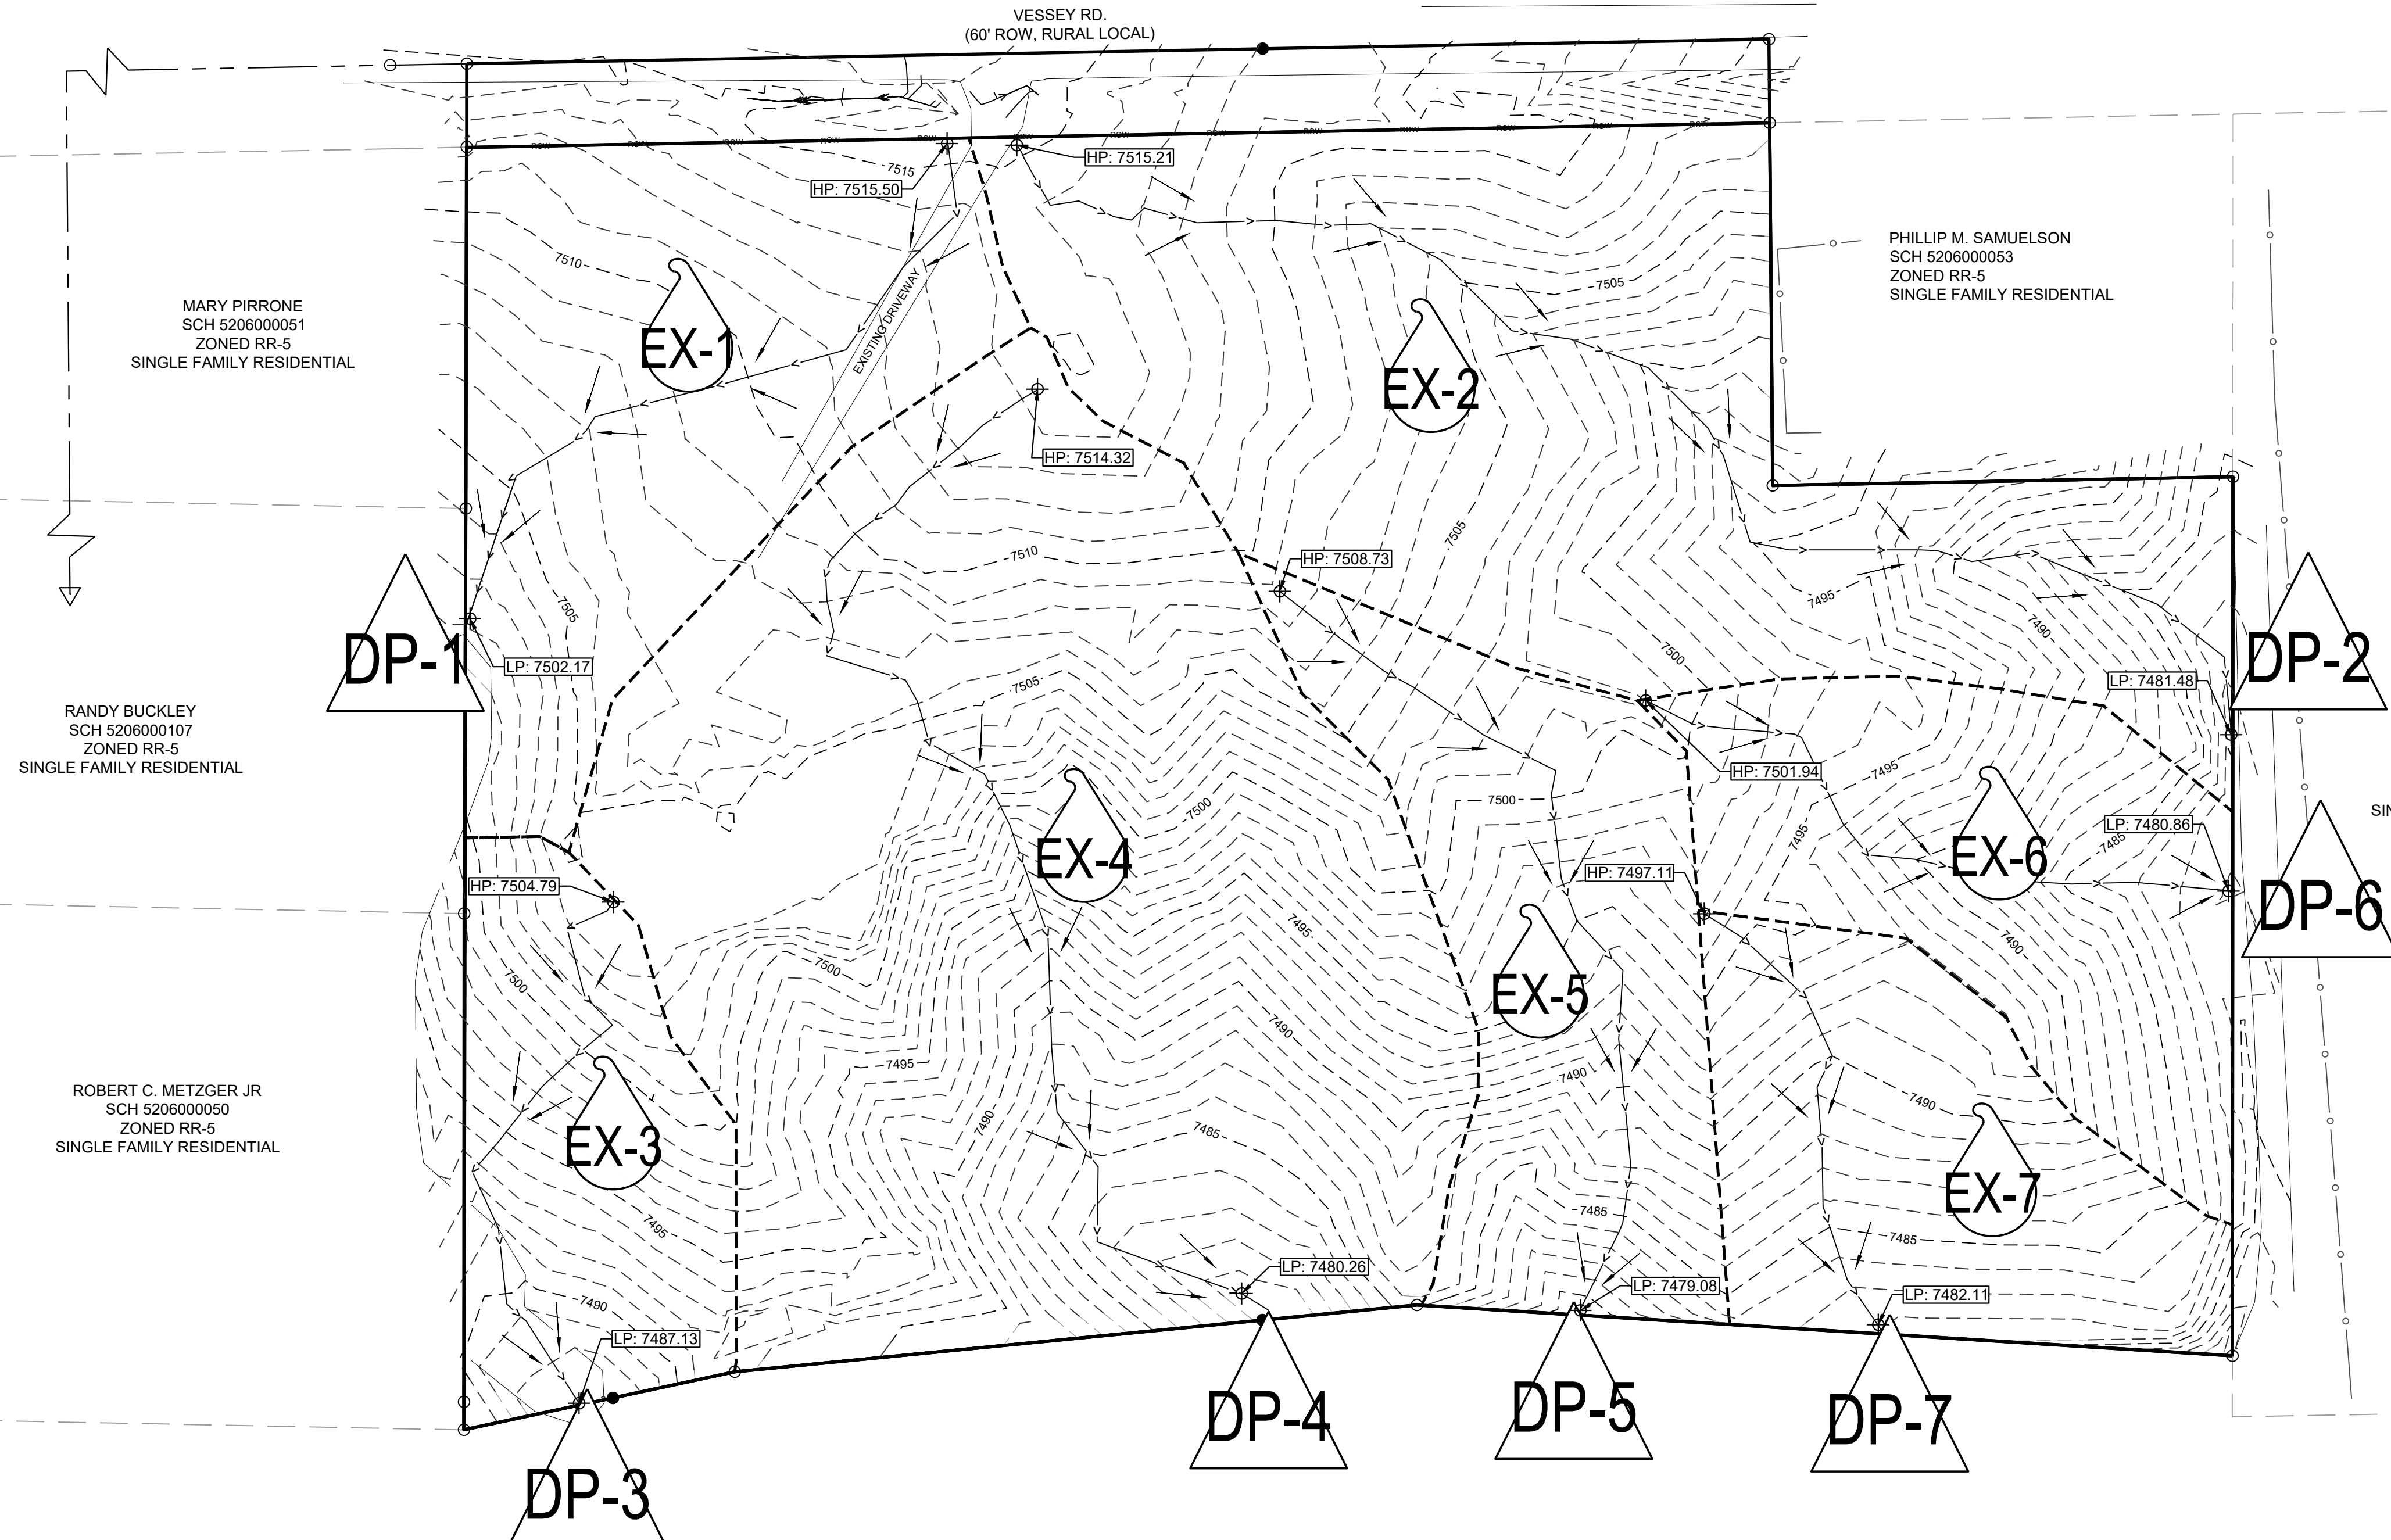


**LEGEND**

- FLOW PATH
- DRAINAGE AREAS
- DRAINAGE AREA #
- FLOW ARROWS
- EXISTING MINOR CONTOUR (1')
- EXISTING MAJOR CONTOUR (5')

DRAINAGE AREA ID	AREA (ACRE)	C5	C100	TIME OF CONCENTRATION (TC)	Q5 (CFS)	Q100 (CFS)
EX-1	0.71	0.10	0.36	18	0.25	1.69
EX-2	1.33	0.08	0.35	20	0.36	2.93
EX-3	0.38	0.08	0.35	14	0.12	1.00
EX-4	1.87	0.08	0.35	17	0.55	4.46
EX-5	0.56	0.08	0.35	16	0.17	1.38
EX-6	0.51	0.08	0.35	14	0.16	1.34
EX-7	0.47	0.08	0.35	12	0.16	1.33

DESIGN POINT	CONTRIBUTING BASINS	AREA (ACRE)	C5	C100	TIME OF CONCENTRATION (TC)	Q5 (CFS)	Q100 (CFS)
EX. DP-1	EX-1	0.71	0.10	0.36	18	0.25	1.69
EX. DP-2	EX-2	1.33	0.08	0.35	20	0.36	2.93
EX. DP-3	EX-3	0.38	0.08	0.35	14	0.12	1.00
EX. DP-4	EX-4	1.87	0.08	0.35	17	0.55	4.46
EX. DP-5	EX-5	0.56	0.08	0.35	16	0.17	1.38
EX. DP-6	EX-6	0.51	0.08	0.35	14	0.16	1.34
EX. DP-7	EX-7	0.47	0.08	0.35	12	0.16	1.33
TOTAL	EX-1, EX-2, EX-3, EX-4, EX-5, EX-6, EX-7	5.83				1.57	12.45

REVISION DATE	REVISION DESCRIPTION (DESCRIPTION)
00/00/00	



PROJECT #: 2209-0355  
CHECKED BY: BML  
DRAWN BY: EDM

DATE: 07/26/2023

SHEET # **FIG.3**

TOTAL SHEETS

PRE-DEVELOPMENT DRAINAGE MAP

DOLES LIVING TRUST  
SCH 520600030  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

ELLEN KLEIN LIVING TRUST  
SCH 520600029  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

DAVID J. BRADBURY  
SCH 520600017  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

DONALD R. SPURR  
SCH 520600096  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

DONALD R. SPURR  
SCH 520600096  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

MARY PIRRONE  
SCH 520600051  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL


PHILLIP M. SAMUELSON  
SCH 520600053  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

RANDY BUCKLEY  
SCH 5205000107  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

ERIC F. MORROW  
SCH 520600054  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

ROBERT C. METZGER JR  
SCH 5205000050  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

CURRENT OWNER IDENTITY PROTECTED  
REC. NO. 213064397  
ZONED RR-5  
SINGLE FAMILY RESIDENTIAL

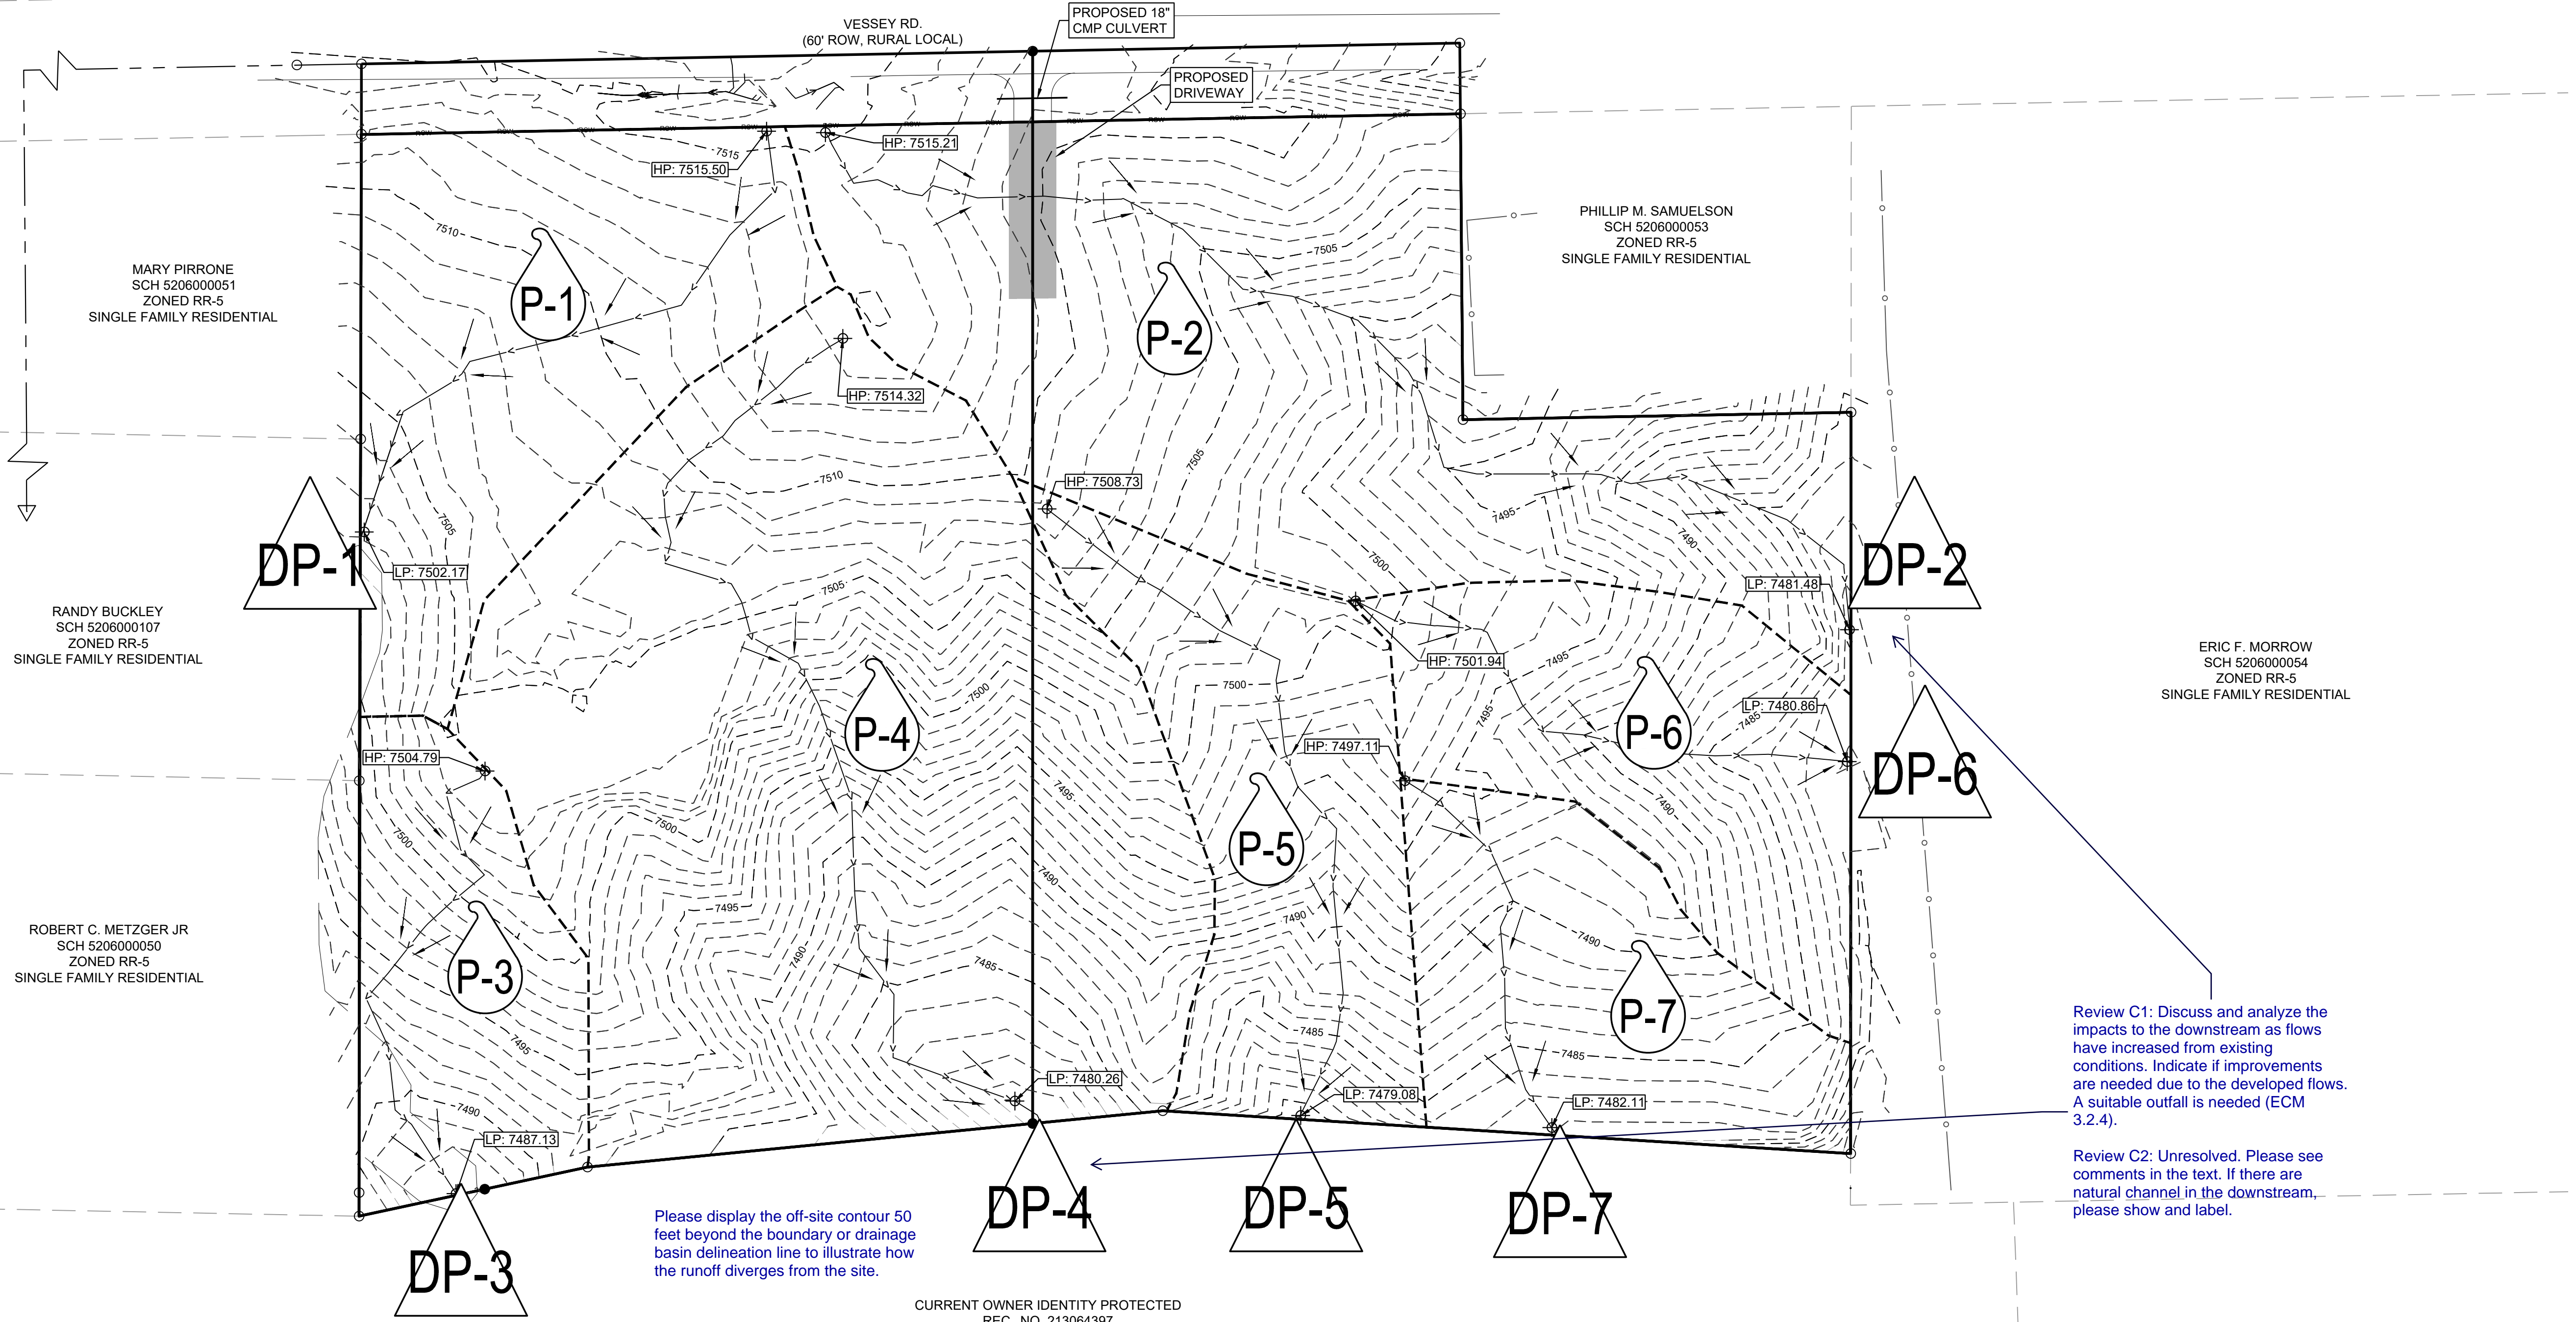

Please display the off-site contour 50 feet beyond the boundary or drainage basin delineation line to illustrate how the runoff diverges from the site.

Review C1: Discuss and analyze the impacts to the downstream as flows have increased from existing conditions. Indicate if improvements are needed due to the developed flows. A suitable outfall is needed (ECM 3.2.4).

Review C2: Unresolved. Please see comments in the text. If there are natural channel in the downstream, please show and label.

**LEGEND**

- FLOW PATH
- DRAINAGE AREAS
- DRAINAGE AREA #
- FLOW ARROWS
- EXISTING MINOR CONTOUR (1')
- EXISTING MAJOR CONTOUR (5')

POST-DEVELOPMENT DRANAGE MAP TABLE						
DRAINAGE AREA ID	AREA (ACRE)	C5	C100	TIME OF CONCENTRATION (TC)	Q5 (CFS)	Q100 (CFS)
P-1	0.71	0.08	0.35	18	0.20	1.65
P-2	1.33	0.12	0.38	20	0.54	3.18
P-3	0.38	0.08	0.35	14	0.12	1.00
P-4	1.87	0.12	0.38	16	0.85	4.99
P-5	0.56	0.12	0.38	15	0.26	1.54
P-6	0.51	0.08	0.35	14	0.16	1.34
P-7	0.47	0.08	0.35	12	0.16	1.33

POST-DEVELOPMENT DESIGN POINT SUMMARY TABLE							
DESIGN POINT	CONTRIBUTING BASINS	AREA (ACRE)	C5	C100	TIME OF CONCENTRATION (TC)	Q5 (CFS)	Q100 (CFS)
DP-1	P-1	0.71	0.08	0.35	18	0.20	1.65
DP-2	P-2	1.33	0.12	0.38	20	0.54	3.18
DP-3	P-3	0.38	0.08	0.35	14	0.12	1.00
DP-4	P-4	1.87	0.12	0.38	16	0.85	4.99
DP-5	P-5	0.56	0.12	0.38	15	0.26	1.54
DP-6	P-6	0.51	0.08	0.35	14	0.16	1.34
DP-7	P-7	0.47	0.08	0.35	12	0.16	1.33
TOTAL	P-1, P-2, P-3, P-4, P-5, P-6, P-7	5.83				2.05	13.32