



CONTOURED LOGO CABINET SPECIFICATIONS

LED illuminated contoured logo cabinet having 5" black returns and 1" black trim cap, 3/16" white acrylic face with UV laminated digital print face, .063 aluminum construction.

Illumination Specifications:

White LED modules, low voltage power supply, low voltage insulated wiring, UL listed and approved, service/disconnect switch on raceway.


Electrical Specifications:

Property owner and/or client is responsible at their own expense to provide a dedicated 20A circuit for the sign, and is responsible at their own expense to have a qualified licensed electrician make the final connection of the sign to the provided circuit.

***NOTE - IN COMPLIANCE WITH SECTION 6.2.3 OF LAND DEVELOPMENT USE.**

Electrical and Attachment Detail:

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDINGS OF THE SIGN.

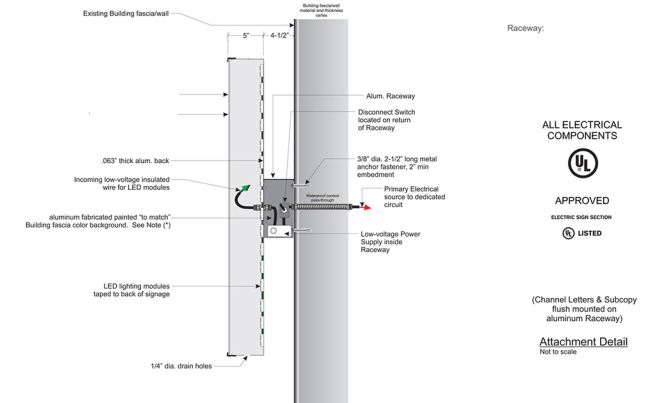

ALL ELECTRICAL COMPONENTS
 APPROVED
 electric sign section
 LISTED

(Channel Letters & Subcopy flush mounted on aluminum Raceway)
 Attachment Detail Not to scale

El Nissi Corporation
 P.O. Box 63795
 Colorado Springs, CO 80962
 (719)492-5807

Customer: **BLACK FOREST BREWERY**
 Address: **11590 BLACKFOREST ROAD, SUITE 50 COLORADO SPRINGS, CO 80908**
 Contact: **DONOVAN ROUSTIS (708)862-8819**

Sign Consultant: **ER**
 Approved by:

Designed by:

Article 600 of the National Electric Code (NEC)
 This statement "MUST" go on every technical drawing that has a sign installed in any jurisdiction in the United States
(Note: the "UL" label or logo, is the Underwriters Laboratory icon and must be placed on every electrical sign attachment or installation detail drawing. UL is only one of several certifying agencies in the U.S.)

ALL ELECTRICAL COMPONENTS
 APPROVED
 electric sign section
 LISTED