

2023 Financial Assurance Estimate Form
(with pre-plat construction)

PPR236


Updated: 12/8/2022

PROJECT INFORMATION		
LOT 1 FALCON MARKETPLACE	9/13/2023	
Project Name	Date	PCD File No.

Description	Quantity	Units	Unit Cost	Total	(with Pre-Plat Construction)	
					% Complete	Remaining
SECTION 1 - GRADING AND EROSION CONTROL (Construction and Permanent BMPs)						
Earthwork						
less than 1,000; \$5,300 min		CY	\$ 8.00	= \$ -		\$ -
1,000-5,000; \$8,000 min	4,880	CY	\$ 6.00	= \$ 29,280.00		\$ 29,280.00
5,001-20,000; \$30,000 min		CY	\$ 5.00	= \$ -		\$ -
20,001-50,000; \$100,000 min		CY	\$ 3.50	= \$ -		\$ -
50,001-200,000; \$175,000 min		CY	\$ 2.50	= \$ -		\$ -
greater than 200,000; \$500,000 min		CY	\$ 2.00	= \$ -		\$ -
Permanent Erosion Control Blanket		SY	\$ 8.00	= \$ -		\$ -
Permanent Seeding (inc. noxious weed mgmt.) & Mulching	0.2	AC	\$ 1,875.00	= \$ 412.50		\$ 412.50
Permanent Pond/BMP (provide engineer's estimate)		EA		= \$ -		\$ -
Concrete Washout Basin	1	EA	\$ 1,089.00	= \$ 1,089.00		\$ 1,089.00
Inlet Protection	4	EA	\$ 202.00	= \$ 808.00		\$ 808.00
Rock Check Dam		EA	\$ 605.00	= \$ -		\$ -
Safety Fence		LF	\$ 3.00	= \$ -		\$ -
Sediment Basin		EA	\$ 2,132.00	= \$ -		\$ -
Sediment Trap		EA	\$ 500.00	= \$ -		\$ -
Silt Fence	945	LF	\$ 3.00	= \$ 2,835.00		\$ 2,835.00
Slope Drain		LF	\$ 40.00	= \$ -		\$ -
Straw Bale		EA	\$ 31.00	= \$ -		\$ -
Straw Wattle/Rock Sock		LF	\$ 7.00	= \$ -		\$ -
Surface Roughening		AC	\$ 250.00	= \$ -		\$ -
Temporary Erosion Control Blanket		SY	\$ 3.00	= \$ -		\$ -
Temporary Seeding and Mulching		AC	\$ 1,666.00	= \$ -		\$ -
Vehicle Tracking Control	1	EA	\$ 2,867.00	= \$ 2,867.00		\$ 2,867.00
[insert items not listed but part of construction plans]				= \$ -		\$ -
				= \$ -		\$ -
MAINTENANCE (35% of Construction BMPs)				= \$ 2,278.50		\$ 2,278.50
Section 1 Subtotal				= \$ 39,570.00		\$ 39,570.00

SECTION 2 - PUBLIC IMPROVEMENTS *

ROADWAY IMPROVEMENTS						
Construction Traffic Control		LS	\$ 25,000.00	= \$ -		\$ -
Aggregate Base Course (135 lbs/cf)		Tons	\$ 34.00	= \$ -		\$ -
Aggregate Base Course (135 lbs/cf)		CY	\$ 61.00	= \$ -		\$ -
Asphalt Pavement (3" thick)		SY	\$ 17.00	= \$ -		\$ -
Asphalt Pavement (4" thick)	10,880.0	SY	\$ 23.00	= \$ 250,240.00		\$ 250,240.00
Asphalt Pavement (6" thick)		SY	\$ 35.00	= \$ -		\$ -
Asphalt Pavement (147 lbs/cf)		Tons	\$ 106.00	= \$ -		\$ -
Raised Median, Paved		SF	\$ 10.00	= \$ -		\$ -
Regulatory Sign/Advisory Sign		EA	\$ 364.00	= \$ -		\$ -
Guide/Street Name Sign		EA		= \$ -		\$ -
Epoxy Pavement Marking		SF	\$ 16.00	= \$ -		\$ -
Thermoplastic Pavement Marking		SF	\$ 28.00	= \$ -		\$ -
Barricade - Type 3		EA	\$ 241.00	= \$ -		\$ -
Delineator - Type I		EA	\$ 29.00	= \$ -		\$ -
Curb and Gutter, Type A (6" Vertical)	3,024.0	LF	\$ 35.00	= \$ 105,840.00		\$ 105,840.00
Curb and Gutter, Type B (Median)		LF	\$ 35.00	= \$ -		\$ -
Curb and Gutter, Type C (Ramp)		LF	\$ 35.00	= \$ -		\$ -
4" Sidewalk (common areas only)		SY	\$ 58.00	= \$ -		\$ -
5" Sidewalk		SY	\$ 72.00	= \$ -		\$ -
6" Sidewalk		SY	\$ 87.00	= \$ -		\$ -
8" Sidewalk		SY	\$ 116.00	= \$ -		\$ -
Pedestrian Ramp		EA	\$ 1,390.00	= \$ -		\$ -
Cross Pan, local (8" thick, 6' wide to include return)		LF	\$ 73.00	= \$ -		\$ -
Cross Pan, collector (9" thick, 8' wide to include return)		LF	\$ 111.00	= \$ -		\$ -
Curb Opening with Drainage Chase			\$ 1,790.00	= \$ -		\$ -
Guardrail Type 3 (W-Beam)			\$ 60.00	= \$ -		\$ -
Guardrail Type 7 (Concrete)			\$ 87.00	= \$ -		\$ -
Guardrail End Anchorage			\$ 2,538.00	= \$ -		\$ -
Guardrail Impact Attenuator			\$ 4,556.00	= \$ -		\$ -
Sound Barrier Fence (CMU block, 6' high)		LF	\$ 95.00	= \$ -		\$ -
Sound Barrier Fence (panels, 6' high)		LF	\$ 97.00	= \$ -		\$ -
Electrical Conduit, Size = 4		LF	\$ 20.00	= \$ -		\$ -
Traffic Signal, (provide engineer's estimate)		EA	\$ 440,000.00	= \$ -		\$ -

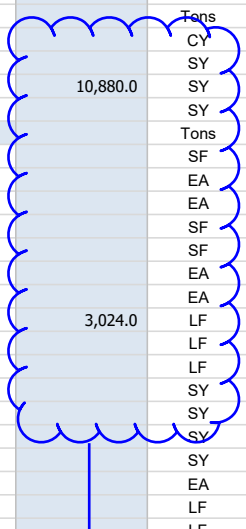

please remove as these are not public improvements

PROJECT INFORMATION

LOT 1 FALCON MARKETPLACE

9/13/2023

Project Name

Date

PCD File No.

Description	Quantity	Units	Unit Cost		Total	(with Pre-Plat Construction)	
						% Complete	Remaining
[insert items not listed but part of construction plans]				=	\$ -		\$ -
[insert items not listed but part of construction plans]				=	\$ -		\$ -
STORM DRAIN IMPROVEMENTS							
Concrete Box Culvert (M Standard), Size (10x6)		LF		=	\$ -		\$ -
18" Reinforced Concrete Pipe	495	LF	\$ 76.00	=	\$ 37,620.00		\$ 37,620.00
24" Reinforced Concrete Pipe	648	LF	\$ 91.00	=	\$ 58,968.00		\$ 58,968.00
30" Reinforced Concrete Pipe		LF	\$ 114.00	=	\$ -		\$ -
36" Reinforced Concrete Pipe		LF	\$ 140.00	=	\$ -		\$ -
42" Reinforced Concrete Pipe		LF	\$ 187.00	=	\$ -		\$ -
48" Reinforced Concrete Pipe		LF	\$ 228.00	=	\$ -		\$ -
54" Reinforced Concrete Pipe		LF	\$ 297.00	=	\$ -		\$ -
60" Reinforced Concrete Pipe		LF	\$ 348.00	=	\$ -		\$ -
66" Reinforced Concrete Pipe		LF	\$ 402.00	=	\$ -		\$ -
72" Reinforced Concrete Pipe		LF	\$ 460.00	=	\$ -		\$ -
18" Corrugated Steel Pipe		LF	\$ 98.00	=	\$ -		\$ -
24" Corrugated Steel Pipe		LF	\$ 112.00	=	\$ -		\$ -
30" Corrugated Steel Pipe		LF	\$ 143.00	=	\$ -		\$ -
36" Corrugated Steel Pipe		LF	\$ 171.00	=	\$ -		\$ -
42" Corrugated Steel Pipe		LF	\$ 197.00	=	\$ -		\$ -
48" Corrugated Steel Pipe		LF	\$ 207.00	=	\$ -		\$ -
54" Corrugated Steel Pipe		LF	\$ 304.00	=	\$ -		\$ -
60" Corrugated Steel Pipe		LF	\$ 328.00	=	\$ -		\$ -
66" Corrugated Steel Pipe		LF	\$ 397.00	=	\$ -		\$ -
72" Corrugated Steel Pipe		LF	\$ 467.00	=	\$ -		\$ -
78" Corrugated Steel Pipe		LF	\$ 537.00	=	\$ -		\$ -
84" Corrugated Steel Pipe		LF	\$ 642.00	=	\$ -		\$ -
Flared End Section (FES) RCP Size = <small>(unit cost = 6x pipe unit cost)</small>		EA	\$ 2,000.00	=	\$ -		\$ -
Flared End Section (FES) RCP Size = <small>(unit cost = 6x pipe unit cost)</small>		EA		=	\$ -		\$ -
End Treatment- Headwall		EA	\$ 10,000.00	=	\$ -		\$ -
End Treatment- Wingwall		EA	\$ 8,000.00	=	\$ -		\$ -
End Treatment - Cutoff Wall		EA	\$ 2,500.00	=	\$ -		\$ -
Curb Inlet (Type R) L=5', Depth < 5'		EA	\$ 6,703.00	=	\$ -		\$ -
Curb Inlet (Type R) L=5', 5' ≤ Depth < 10'	3	EA	\$ 8,715.00	=	\$ 26,145.00		\$ 26,145.00
Curb Inlet (Type R) L =5', 10' ≤ Depth < 15'		EA	\$ 10,092.00	=	\$ -		\$ -
Curb Inlet (Type R) L =10', Depth < 5'		EA	\$ 9,224.00	=	\$ -		\$ -
Curb Inlet (Type R) L =10', 5' ≤ Depth < 10'		EA	\$ 9,507.00	=	\$ -		\$ -
Curb Inlet (Type R) L =10', 10' ≤ Depth < 15'		EA	\$ 11,901.00	=	\$ -		\$ -
Curb Inlet (Type R) L =15', Depth < 5'		EA	\$ 11,995.00	=	\$ -		\$ -
Curb Inlet (Type R) L =15', 5' ≤ Depth < 10'		EA	\$ 12,858.00	=	\$ -		\$ -
Curb Inlet (Type R) L =15', 10' ≤ Depth < 15'		EA	\$ 14,061.00	=	\$ -		\$ -
Curb Inlet (Type R) L =20', Depth < 5'		EA	\$ 12,783.00	=	\$ -		\$ -
Curb Inlet (Type R) L =20', 5' ≤ Depth < 10'		EA	\$ 14,109.00	=	\$ -		\$ -
Grated Inlet (Type C), Depth < 5'	1	EA	\$ 5,611.00	=	\$ 5,611.00		\$ 5,611.00
Grated Inlet (Type D), Depth < 5'		EA	\$ 6,931.00	=	\$ -		\$ -
Storm Sewer Manhole, Box Base		EA	\$ 14,061.00	=	\$ -		\$ -
Storm Sewer Manhole, Slab Base	7	EA	\$ 7,734.00	=	\$ 54,138.00		\$ 54,138.00
Geotextile (Erosion Control)		SY	\$ 8.00	=	\$ -		\$ -
Rip Rap, d50 size from 6" to 24"		Tons	\$ 97.00	=	\$ -		\$ -
Rip Rap, Grouted		Tons	\$ 115.00	=	\$ -		\$ -
Drainage Channel Construction, Size (W x H)		LF	\$ -	=	\$ -		\$ -
Drainage Channel Lining, Concrete		CY	\$ 689.00	=	\$ -		\$ -
Drainage Channel Lining, Rip Rap			\$ 135.00	=	\$ -		\$ -
Drainage Channel Lining, Grass			\$ 1,776.00	=	\$ -		\$ -
Drainage Channel Lining, Other Stabilization				=	\$ -		\$ -
[insert items not listed but part of construction pl				=	\$ -		\$ -
Section 2 Subtotal					=	\$ 538,562.00	\$ 538,562.00

remove as this are not public improvements

* - Subject to defect warranty financial assurance. A minimum of retained until final acceptance (MAXIMUM OF 80% COMPLETE)

PROJECT INFORMATION

LOT 1 FALCON MARKETPLACE

9/13/2023

Project Name

Date

PCD File No.

Description	Quantity	Units	Unit Cost	Total	(with Pre-Plat Construction)	
					% Complete	Remaining
SECTION 3 - COMMON DEVELOPMENT IMPROVEMENTS (Private or District and NOT Maintained by EPC)**						
DRY UTILITIES						
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
STORM DRAIN IMPROVEMENTS (Exception: Permanent Pond/BMP shall be itemized under Section 1)						
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
				= \$	-	\$ -
WATER SYSTEM IMPROVEMENTS						
Water Main Pipe (PVC), Size 6"		LF		= \$	-	\$ -
Water Main Pipe (PVC), Size 8"		LF	\$ 78.00	= \$	-	\$ -
Gate Valves, 8"		EA	\$ 2,247.00	= \$	-	\$ -
Fire Hydrant Assembly, w/ all valves		EA	\$ 7,978.00	= \$	-	\$ -
Water Service Line Installation, inc. tap and valves		EA	\$ 1,601.00	= \$	-	\$ -
Fire Cistern Installation, complete		EA		= \$	-	\$ -
				= \$	-	\$ -
SANITARY SEWER IMPROVEMENTS						
Sewer Main Pipe (PVC), Size 8"		LF	\$ 78.00	= \$	-	\$ -
Sanitary Sewer Manhole, Depth < 15 feet		EA	\$ 5,305.00	= \$	-	\$ -
Sanitary Service Line Installation, complete		EA	\$ 1,696.00	= \$	-	\$ -
Sanitary Sewer Lift Station, complete		EA		= \$	-	\$ -
				= \$	-	\$ -
<i>[insert items not listed but part of construction plans]</i>						
				= \$	-	\$ -
LANDSCAPING IMPROVEMENTS (For subdivision specific condition of approval, or PUD)						
		EA		= \$	-	\$ -
		EA		= \$	-	\$ -
		EA		= \$	-	\$ -
		EA		= \$	-	\$ -
		EA		= \$	-	\$ -
Section 3 Subtotal				= \$	-	\$ -

** - Section 3 is not subject to defect warranty requirements

PROJECT INFORMATION

LOT 1 FALCON MARKETPLACE	9/13/2023	
Project Name	Date	PCD File No.

Description	Quantity	Units	Unit Cost	Total	(with Pre-Plat Construction)	
					% Complete	Remaining
AS-BUILT PLANS (Public Improvements inc. Permanent WQCV BMPs)		LS		= \$ -		\$ -
POND/BMP CERTIFICATION (inc. elevations and volume calculations)		LS		= \$ -		\$ -
Total Construction Financial Assurance						\$ 578,132.00
(Sum of all section subtotals plus as-builts and pond/BMP certification)						
Total Remaining Construction Financial Assurance (with Pre-Plat Construction)						\$ 578,132.00
(Sum of all section totals less credit for items complete plus as-builts and pond/BMP certification)						
Total Defect Warranty Financial Assurance						\$ 113,650.90
(20% of all items identified as (*). To be collateralized at time of preliminary acceptance)						

Approvals

I hereby certify that this is an accurate and complete estimate of costs for the work as shown on the Grading and Erosion Control Plan and Construction Drawings associated with the Project.

 Engineer (P.E. Seal Required)

 Approved by Owner / Applicant


 Date

 Approved by El Paso County Engineer / ECM Administrator

 Date

V1_Financial Assurance Forms Comments.pdf Markup Summary

Daniel Torres (3)



Subject: Callout
Page Label: 1
Author: Daniel Torres
Date: 10/10/2023 3:17:01 PM
Status:
Color: ■

PPR236



Subject: Cloud+
Page Label: 1
Author: Daniel Torres
Date: 10/10/2023 3:18:06 PM
Status:
Color: ■

please remove as these are not public improvements



Subject: Cloud+
Page Label: 2
Author: Daniel Torres
Date: 10/10/2023 3:24:08 PM
Status:
Color: ■

remove as this are not public improvements