

Key
● Light Pole
Scale: 1=70



LED PARKING LOT LIGHT


TOP Series




FEATURES & SPECIFICATIONS

With innovative low profile, one-piece housing, the Hyperlite Top series supports superior thermal management and self-cleaning capability from rain, snow, bird droppings etc. The contractor-friendly design includes two buckles and a hinged swing wiring box for extremely easy installation. The environmentally friendly powder coatings are formulated for high durability and long-lasting color. (The light pole is just for reference, not included)


Model	CES-LS-FT-100W	CES-LS-FT-150W	CES-LS-FT-200W	CES-LS-FT-300W
Lumens	15000 lm	22500 lm	30000 lm	45000 lm
Wattage	100W	150W	200W	300W
Efficacy	150lm/W			
CCT	5000K			
CRI	>70			
Beam angle	Type III			
Lifespan	>50,000hours			
Mounting	Adjustable Pole Mounting, Slip Fitter Mounting, Trunnion Mounting			
Sensor	Photocell			
Vibration test	1.5G per ANSI 361 C1366.31			
Input voltage	AC100-277V			
Power factor	>0.9			
Operating temperature	-22°F/-113°F(-30°C to 45°C)			
Listings	UL , cUL, DLC			
IP rating	IP 65			
Warranty	5 Years			

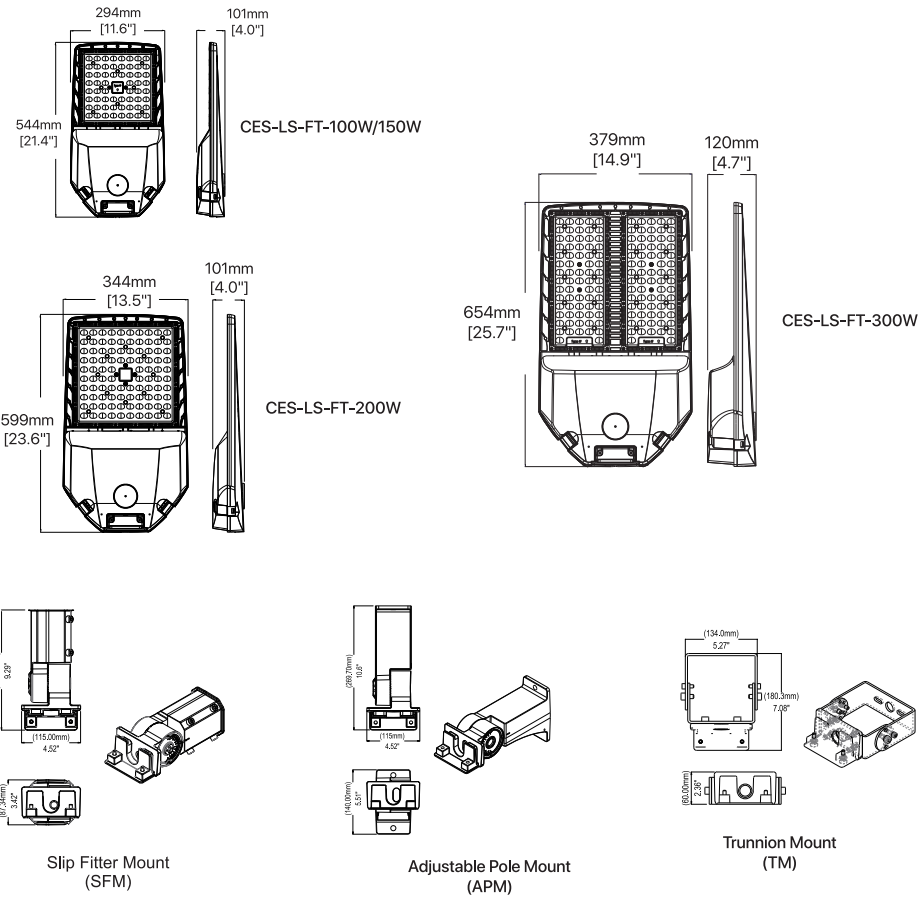

DISTRIBUTION



100W/15000lm	150W/22500lm	200W/30000lm	300W/45000lm	
36.5 fc	52.0 fc	76.1 fc	103.4 fc	10ft
20.5 fc	29.3 fc	42.8 fc	58.1 fc	14ft
9.1 fc	13.0 fc	19.0 fc	25.8 fc	20ft
5.2 fc	7.3 fc	10.7 fc	14.5 fc	26ft
3.3 fc	4.6 fc	6.8 fc	9.3 fc	32ft

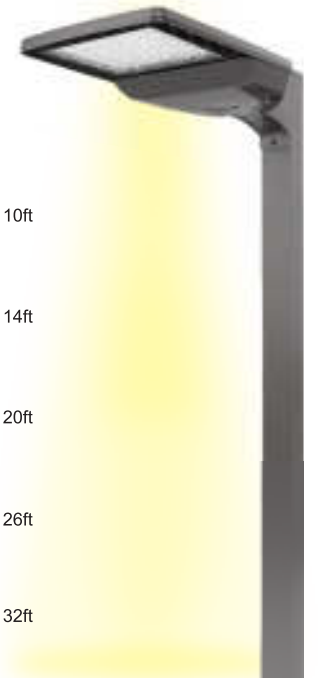

PACKAGING INFORMATION

Model	Wattage	Net Weight	Gross Weight	Bracket/Extra Weight	CTN Size
CES-LS-FT-100W	100W	11.2±1 lbs	13.2±1 lbs	APM: 3.20 lbs SFM: 3.46 lbs TM: 2.71lbs	28.9 * 13.2 * 5.7"
CES-LS-FT-150W	150W	11.9±1 lbs	15.4±1 lbs		28.9 * 13.2 * 5.7"
CES-LS-FT-200W	200W	14.3±1 lbs	17.6±1 lbs		31.7 * 15.7 * 5.7"
CES-LS-FT-300W	300W	22.3±1 lbs	26.5±1 lbs		34.1 * 17.1 * 7.1"

UL CERTIFICATION

Certificate Number: E483348
 Report Reference: E483348
 Issue Date: 2019-OCTOBER-14



Additional Information:

See the UL Online Certifications Directory at www.ul.com/database for additional information.

- ▲ Only those products bearing the UL Certification Mark should be considered as being covered by UL's Certification and Follow-Up Service.
- ▲ Look for the UL Certification Mark on the product.

















2
116



se
IONS
ase Buy
990-1900
1900
m

5

102
5
3

4

121

11304



Warehouse

R3

16

