



Preliminary Drainage Report

Eagleview Subdivision El Paso County, Colorado

Prepared for:

Joe DesJardin

PT Eagleview LLC

1864 Woodmoor Drive, Suite 100

Monument, CO 80132

Prepared by:

Kimley-Horn and Associates, Inc.

2 North Nevada Avenue, Suite 300

Colorado Springs, Colorado 80903

(719) 453-0180

Contact: Brice Hammersland, P.E.

Project #: 196288000

PCD Filing No.: SP216

Prepared: October 28, 2022



Kimley»»Horn



CERTIFICATION

DESIGN ENGINEER'S STATEMENT

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparation of this report.

SIGNATURE (Affix Seal):  10/28/2022
Brice Hammersland, P.E.  Date
Colorado P.E. No. 56012

OWNER/DEVELOPER'S STATEMENT

I, the developer, have read and will comply with all of the requirements specified in this Drainage Report and Plan.


PT Eagleview LLC
✓ *Joseph W. DesJardin* 10/28/2022
Authorized Signature Date

Joseph W. DesJardin
Director of Entitlements

Address:
1864 Woodmoor Drive
Monument, CO 80132

EL PASO COUNTY

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 and 2, El Paso County Engineering Criteria Manual and Land Development Code as amended.

Josh Palmer, P.E.
County Engineer/ ECM Administrator
APPROVED
Engineering Department
11/28/2022 12:28:35 PM

EPC Planning & Community Development Department

Conditions:

TABLE OF CONTENTS

CERTIFICATION2
 DESIGN ENGINEER’S STATEMENT2
 OWNER/DEVELOPER’S STATEMENT2
 EL PASO COUNTY2

TABLE OF CONTENTS3

INTRODUCTION4
 PURPOSE AND SCOPE OF STUDY4
 LOCATION4
 DESCRIPTION OF PROPERTY4

DRAINAGE BASINS5
 MAJOR BASIN DESCRIPTIONS5
 EXISTING SUB-BASIN DESCRIPTIONS5
 PROPOSED SUB-BASIN DESCRIPTIONS7

DRAINAGE DESIGN CRITERIA.....10
 DEVELOPMENT CRITERIA REFERENCE10
 HYDROLOGIC CRITERIA10
 HYDRAULIC CRITERIA12
 CULVERT SIZING14
 CHANNEL STABILIZATION14
 DETENTION POND SUMMARY.....14
 PAINTBRUSH HILLS- EMERGENCY OVERFLOW14

DRAINAGE FACILITY DESIGN15
 GENERAL CONCEPT15
 SPECIFIC DETAILS15
 EXISTING MAJOR DRAINAGE CHANNELS16

THE FOUR STEP PROCESS16

DRAINAGE FEES AND REIMBURSABLE COSTS17
 FEES17
 IMPROVEMENTS AND REIMBURSABLE COSTS17

SUMMARY18

REFERENCES19

APPENDIX
 APPENDIX A: FIGURES
 APPENDIX B: HYDROLOGY
 APPENDIX C: HYDRAULICS
 APPENDIX D: REFERENCES
 APPENDIX E: DRAINAGE MAPS
 APPENDIX F: OPCC

INTRODUCTION

PURPOSE AND SCOPE OF STUDY

The purpose of this Preliminary Drainage Report (PDR) is to provide the hydrologic and preliminary hydraulic calculations and to document the drainage design methodology in support of the proposed Eagleview Subdivision (“the Project”) for PT Eagleview LLC. The finalized hydraulic design and associated calculations will be provided with the Final Drainage Report. The Project is located within the jurisdictional limits of El Paso County (“the County”). Therefore, the hydrologic and hydraulic design is based on the County’s criteria which is described in further detail within the report.

LOCATION

The Project is located approximately 4 miles northwest of Falcon, Colorado within Section 26, Township 12 South, Range 65 West of the 6th Principal Meridian, County of El Paso, State of Colorado (“the Site”). The Site comprises two parcels of land which are bound by Stapleton Estates Filing No. 1 on the west and south, Paint Brush Hills Filing No. 14 (PCD File No. SF2024) to the east, and the Rodgwick Subdivision and MFY Farm Subdivision to the north. A vicinity map has been provided in the **Appendix A** of this report.

The Site is currently owned by PT Eagleview LLC and will be developed by PT Eagleview LLC.

DESCRIPTION OF PROPERTY

The Site is approximately 121 acres consisting of undeveloped land with native vegetation and is classified as “Open Space” per Table 5-4 of the Drainage Criteria Manual of El Paso County. Vegetation within the site is characterized primarily by prairie grasses along with some area of scrub brush and a limited occurrence of small oaks. The Site does not currently provide water quality or detention for the Project area. The existing land use is undeveloped vacant land. There are no existing irrigation ditches on the Site.

The existing topography consists of slopes ranging from 1% to 20%. The west tributary of the Falcon drainage basin runs from the northwest corner of the site to the southeast corner of the Site.

According to NRCS soil mapping data, USCS Type B soils are the primary soil type within the site, indicating high levels of permeability. Soils present at the Site consist mainly of “Pring coarse sandy loam” which represent a moderate hazard for erosion. **Appendix B** contains detailed NRCS soil data.

The development of this site will include 38, 2 ½ acre single family lots, roadway improvements to the site will include mowing, clearing and grubbing, weed control, paved access road construction, roadway grading, one sub regional detention pond, two water quality features, roadside ditches, culverts, drainage swales, native seeding and a proposed channel to convey flows to the detention pond and water quality features.

A Topographic field survey was completed for the Project by Rampart Surveys dated June 24th, 2008 and is the basis for design for the drainage improvements.

DRAINAGE BASINS

MAJOR BASIN DESCRIPTIONS

The Project is located within the West Tributary of the Falcon Drainage Basin. The watershed is generally located in the north central portion of El Paso County. The watershed contains three streams and has an overall area of approximately 10.6 square miles at the confluence of Black Squirrel Creek. The headwaters of the watershed are made up of ponderosa pine forest, grassland on undeveloped land, and 2-to-5-acre rural residential lots. There is no FEMA mapped floodplain on the project site. Refer to **Appendix A** for the Flood Insurance Rate Map (FIRM) number 08041C05350G effective date, December 7, 2018.

EXISTING SUB-BASIN DESCRIPTIONS

Historically the runoff from the Site drains into the West Tributary reach of the Falcon drainage basin. The West Tributary reach bisects the Site from north to south. The Site is located in upper portion of the Falcon drainage basin. The Site was divided into 4 onsite subbasins B1 – B4 and 8 offsite basins OB1 – OB8. Onsite and offsite flows generally flow from north to south overland over vacant and developed land to the West Tributary reach. The off-site basins draining to the site generally encompass rural land with pockets of residential development. Below is a description of the existing sub-basins.

Sub-Basin B1

The on-site sub-basin consists of an area of 5.55 acres, located in the southwest corner of the property. Drainage flows overland from the northwest to the southeast into the West Tributary. The curve number for this basin is 61.00. Runoff during the 5-year and 100-year events are 3.0 cfs and 8.5 cfs respectively.

Sub-Basin B2

The on-site sub-basin consists of an area of 41.43 acres, located on the west side of the property. Drainage flows overland from the northwest to the southeast into the West Tributary. The curve number for this basin is 60.68. Runoff during the 5-year and 100-year events are 15.4 cfs and 48.5 cfs respectively.

Sub-Basin B3

The on-site sub-basin consists of an area of 59.54 acres, located in the central portion of the property. Drainage flows overland from the northwest to the southeast into the West Tributary reach. The curve number for this basin is 60.90. Runoff during the 5-year and 100-year events are 36.4 cfs and 110.0 cfs respectively.

Sub-Basin B4

The on-site sub-basin consists of an area of 14.68 acres, located in the northeast portion of the property. Drainage flows overland from the north to the south into the West Tributary reach. The curve number for this basin is 61.00. Runoff during the 5-year and 100-year events are 5.4 cfs and 18.2 cfs respectively.

Sub-Basin OB1

The off-site sub-basin consists of an area of 10.37 acres, located on the southwest corner of the property. Drainage flows overland from the west to the east onto the property and continues to the southeast and outfalls along the south property line into the West Tributary reach at design point J1. The curve number for this basin is 63.76. Runoff during the 5-year and 100-year events are 7.1 cfs and 18.8 cfs respectively.

Sub-Basin OB2

The off-site sub-basin consists of an area of 28.06 acres, located on the west side of the property. Drainage flows overland from the west to the east onto the property. Flows enter the site in a well-defined natural channel and continue to the southeast as channelized flow. Where the flows ultimately outfall along the south property line into the West Tributary reach at design point J2. The curve number for this basin is 64.16. Runoff during the 5-year and 100-year events are 20.6 cfs and 52.7 cfs respectively.

Sub-basin OB3

The off-site sub-basin consists of an area of 43.44 acres, located on the west of the property. Drainage flows overland from the northwest to the southeast and enters the site as channelized flow and continue to the southeast as channelized flow. Where the flows ultimately outfall at the south property line into the West Tributary reach at design point J2. The curve number for this basin is 63.62. Runoff during the 5-year and 100-year events are 25.3 cfs and 67.1 cfs respectively.

Sub-basin OB4

The off-site sub-basin consists of an area of 10.50 acres, located on the west side of the property. Drainage flows overland from the northwest to the southeast and enters the site as channelized flow and continues to the southeast as channelized flow. Where the flows ultimately outfall at the south property line into the West Tributary reach at design point J2. The curve number for this basin is 64.71. Runoff during the 5-year and 100-year events are 7.5 cfs and 18.9 cfs respectively.

Sub-basin OB5

The off-site sub-basin consists of an area of 143.82 acres, located on the northwest side of the property. Drainage flows overland from the northwest to the southeast and enters the site as channelized flow and continues to the southeast as channelized flow. Where the flows ultimately outfall into the West Tributary reach on-site at design point J4. The curve number for this basin is 59.98. Runoff during the 5-year and 100-year events are 36.8 cfs and 106.9 cfs respectively.

Sub-basin OB6

The off-site sub-basin consists of an area of 118.40 acres, located north side of the property. Drainage flows overland from the north to the south and enters the site as channelized flow and continues to the south where it outfalls into the West Tributary on-site at design point J4. The curve number for this basin is 61.77. Runoff during the 5-year and 100-year events are 40.8 cfs and 113.2 cfs respectively.

Sub-Basin OB7

The off-site sub-basin consists of an area of 421.20 acres, located on the north side of the property. Drainage flows overland from the north to the south and enters the site as channelized flow within the West Tributary reach. The curve number for this basin is 61.07. Runoff during the 5-year and 100-year events are 101.4 cfs and 284.2 cfs respectively.

Sub-Basin OB8

The offsite sub-basin consists of an area of 33.07 acres, located northeast of the property. Drainage flows overland from the north to the south and enters onto the site as shallow concentrated flow as there is no well-defined natural drainage channel in this area of the site. Flows then continue to the south in a more defined natural channel and outfall into the West Tributary reach on-site at design point J3. The curve number for this basin is 64.89. Runoff during the 5-year and 100-year events are 19.5 cfs and 51.6 cfs respectively.

Refer to **Appendix F** for the Existing Drainage Conditions Map.

PROPOSED SUB-BASIN DESCRIPTIONS

For the proposed condition, stormwater will generally maintain historic flow patterns from north to south. The proposed roadways will alter some of the existing flow paths. The roadway ditches will capture runoff from the roadways and direct flows back to the existing flow paths, which will ultimately outfall to existing natural drainage channels, sub regional pond, or water quality features. The proposed project has been divided into 15 on-site sub-basins. The off-site basins are fully developed and no changes to the upstream basins are anticipated.

Sub-Basin PB1

The on-site sub-basin consists of 2 residential lots at the southwest corner of the property. The sub-basin has an area of 4.25 acres. The curve number for the sub-basin is 64.35. Runoff during the 5-year and 100-year events are 3.0 cfs and 7.7 cfs respectively. Runoff from this basin will travel across the lots and outfall to the south as it has done historically at design point P1.

Sub-Basin PB2

The on-site sub-basin consists of 1 residential lot at the southwest corner of the property. The sub-basin has an area of 1.08 acres. The curve number for the sub-basin is 65.38. Runoff during the 5-year and 100-year events are 1.0 cfs and 2.4 cfs respectively. Runoff from this basin will travel across the lot and outfall to the south as it has done historically at design point P1.

Sub-Basin PB3

The on-site sub-basin consists of portions of 2 residential lots and the half street of the proposed local roadway at the southwest corner of the property. The sub-basin has an area of 1.38 acres. The curve number for the sub-basin is 67.68. Runoff during the 5-year and 100-year events are 1.5 cfs and 3.3 cfs respectively. Runoff from this basin will travel across the lots and be conveyed to Culvert 1 through a roadside ditch. Flows will then be conveyed through basin PB15 via a natural channel and outfall into Water Quality Feature 1 before out falling into the West Tributary reach at design point P2.

Sub-Basin PB4

The on-site sub-basin consists of 4 residential lots and the half streets of the proposed local roadway at the southwest corner of the property. The sub-basin has an area of 10.54 acres. The curve number for the sub-basin is 64.84. Runoff during the 5-year and 100-year events are 12.6 cfs and 30.2 cfs respectively. Runoff from this basin will travel across the lots and be conveyed by a natural channel to Culvert 2. Where flows will then be conveyed through basin PB15 via a

natural channel and outfall into Water Quality Feature 1 before out falling into the West Tributary reach at design point P2.

Sub-Basin PB5

The on-site sub-basin consists of 2 residential lots and the half street of the proposed local roadways at the west side of the property. The sub-basin has an area of 6.18 acres. The curve number for the sub-basin is 64.70. Runoff during the 5-year and 100-year events are 4.2 cfs and 10.4 cfs respectively. Runoff from this basin will travel across the lots and be conveyed by a natural channel to Culvert 7. Where flows will then be conveyed through basin PB4 and PB15 via a natural channel and outfall into Water Quality Feature 1 before out falling into the West Tributary reach at design point P2.

Sub-Basin PB6

The on-site sub-basin consists of 3 residential lots and the half street of the proposed local roadway near the central portion of the property. The sub-basin has an area of 11.09 acres. The curve number for the sub-basin is 65.33. Runoff during the 5-year and 100-year events are 8.6cfs and 20.7 cfs respectively. Runoff from this basin will travel across the lots and roadside ditches to Culvert 3. Where flows will then be conveyed through basin PB15 via a natural channel and outfall into Water Quality Feature 1 before out falling into the West Tributary reach at design point P2.

Sub-Basin PB7

The on-site sub-basin consists of 3 residential lots and portions of the proposed local roadways near the central portion of the property. The sub-basin has an area of 5.59 acres. The curve number for the sub-basin is 65.38. Runoff during the 5-year and 100-year events are 4.7 cfs and 11.4 cfs respectively. Runoff from this basin will travel across the lots and roadside ditches to Culvert 4. Runoff will then be conveyed through a roadside ditch to Culvert 3. From there the runoff will be conveyed through basin PB15 via a natural channel and outfall into Water Quality Feature 1 before out falling into the West Tributary reach.

Sub-Basin PB8

The on-site sub-basin consists of 3 residential lots, a large natural drainage channel and a portion of the sub regional Pond 1 near the northwest corner of the property. The sub-basin has an area of 11.78 acres. The curve number for the sub-basin is 64.13. Runoff during the 5-year and 100-year events are 12.1 cfs and 30.4 cfs respectively. Runoff from this basin will travel across the lots and into the natural channel that outfalls into the sub regional detention Pond 1.

Sub-Basin PB9

The on-site sub-basin consists of 4 residential lots, a large natural drainage channel and a portion of the sub regional Pond 1 near the northern portion of the property. The sub-basin has an area of 12.80 acres. The curve number for the sub-basin is 64.39. Runoff during the 5-year and 100-year events are 9.8 cfs and 24.8 cfs respectively. Runoff from this basin will travel across the lots and into the natural channel that outfalls into the sub regional detention Pond 1.

Sub-Basin PB10

The on-site sub-basin consists of 4 residential lots and a portion of the sub regional Pond 1 near the northern portion of the property. The sub-basin has an area of 11.52 acres. The curve number for the sub-basin is 64.57. Runoff during the 5-year and 100-year events are 8.2 cfs and 20.4 cfs respectively. Runoff from this basin will travel across the lots and into the natural channel that outfalls into the sub regional detention Pond 1.

Sub-Basin PB11

The on-site sub-basin consists of 6 residential lots and portions of the proposed local roadways near the northeast portion of the property. The sub-basin has an area of 16.11 acres. The curve number for the sub-basin is 64.80. Runoff during the 5-year and 100-year events are 12.1 cfs and 29.8 cfs respectively. Runoff from this basin will travel across the lots utilize roadside ditches and natural drainage channels to convey flows to Culvert 6. From there the runoff will be conveyed through basin PB14 via a natural channel and outfall into Water Quality Feature 2 before out falling into the West Tributary reach.

Sub-Basin PB12

The on-site sub-basin consists of a portion of the proposed local roadways near the east portion of the property. The sub-basin has an area of 0.20 acres. The curve number for the sub-basin is 76.50. Runoff during the 5-year and 100-year events are 0.5 cfs and 0.9 cfs respectively. Runoff from this basin will utilize a roadside ditch to convey flows to Culvert 5. From there the runoff will be conveyed through basin PB14 via a natural channel and outfall into Water Quality Feature 2 before out falling into the West Tributary reach.

Sub-Basin PB13

The on-site sub-basin consists of a portion of the proposed local roadways near the east portion of the property. The sub-basin has an area of 1.76 acres. The curve number for the sub-basin is 65.12. Runoff during the 5-year and 100-year events are 2.2 cfs and 5.1 cfs respectively. Runoff from this basin will sheet flow into the West Tributary reach. From there the runoff will be conveyed to Culvert 8 and through basin PB14 via the West Tributary reach and outfall to design point P3.

Sub-Basin PB14

The on-site sub-basin consists of 4 residential lots a portion of the proposed local roadways near the southeast portion of the property. The sub-basin has an area of 17.28 acres. The curve number for the sub-basin is 63.64. Runoff during the 5-year and 100-year events are 18.9 cfs and 46.3 cfs respectively. Runoff from this basin will sheet flow into the West Tributary reach and outfall to design point P3.

Sub-Basin PB15

The on-site sub-basin consists of 5 residential lots and portions of the proposed local roadways near the northeast portion of the property. The sub-basin has an area of 9.63 acres. The curve number for the sub-basin is 61.65. Runoff during the 5-year and 100-year events are 11.0 cfs and 26.3 cfs respectively. Runoff from this basin will travel across the lots utilize roadside ditches and natural drainage channels to convey flows to Water Quality Feature 1 out falling into the West Tributary reach at design point P2.

Sub-Basins OB1 – OB8

The offsite sub basins are fully built out per the DBPS and are anticipated to maintain historic flows and drainage patterns.

DRAINAGE DESIGN CRITERIA

DEVELOPMENT CRITERIA REFERENCE

The proposed storm facilities are designed to be in compliance with the El Paso County “Engineering Criteria Manual”, Volumes 1 and 2 and the City of Colorado Springs May 2014 Drainage Criteria Manual, Volume 1, (“the DCM”).

Site drainage is not significantly impacted by such constraints as utilities or existing development.

A Falcon Drainage Basin Planning Study prepared by Matrix Design Group, September 2015 (DBPS) was completed and includes the Eagleview subdivision. This planning study was used for reference to assist with drainage design for the proposed subdivision. The proposed release rate for sub regional pond is planned to be less than or equal to what was determined in the DBPS. As part West Tributary reach analysis, stream improvements were identified and conceptually designed for the entire reach. Refer to **Appendix D** for excerpts from the DBPS.

HYDROLOGIC CRITERIA

The 5-year and 100-year design storm events were used in determining rainfall and runoff for the proposed drainage analysis per the Engineering Manual. The model utilizes the NRCS Type II rainfall distribution, the cumulative depth for the 5-year storm 2.7 inches and the cumulative depth for the 100-year storm is 4.6 inches. Per the DCM both Frontal and Thunderstorms were evaluated to determine the higher design flow. The comparative analysis between the two storms shows that the Frontal Storm produces a significantly higher flow rates therefore, this storm was used for the drainage design. The rainfall distribution for the Frontal Storm was selected as the dominant storm-type for this project. See **Table 1** below for the rainfall values.

Table 1: Colorado Springs Rainfall Depths

	Duration (HRS)	
Storm Event	1 HR	24 HR
5 Year	1.5	2.7
100 Year	2.52	4.6

It should be noted that the DBPS used a slightly lower cumulative depth for the 5-yr (2.6 inches) and used the same cumulative depth for the 100-year of (4.6 inches) because the DBPS used an aerial reduction of 2% to the rainfall depths as the Falcon Watershed is slightly larger than 10 square miles. This aerial reduction cannot be applied to the rainfall depths for this Site. Refer to Tables 6-2 and 6-4 in Chapter 6 of the DCM for the frontal rainfall distribution curve and Colorado Springs rainfall depths data for the 5-year and 100-year design storm events utilized

for the project. The project model was compared to the DBPS model, and it generally reflects lower flows for the project site area. This is mainly due to using the Type II rainfall distribution curve versus the Type IIa rainfall distribution curve that the DBPS model used. Design point JWT080 in the DBPS model and design points J4 and P7 in the project models were used as critical points to compare the existing and proposed condition models.

Design runoff was calculated using the NRCS curve number method as established in the DCM. This aligns with what was completed in the Falcon Drainage Basin Planning Study (DBPS). The NRCS curve number method was used for existing conditions and proposed conditions due to the on-site and off-site basins containing more than 130 acres. Existing and future land uses were obtained from the County GIS department. Where possible, runoff curve numbers established in the DBPS were utilized since these were more conservative than equivalents found in the DCM. For all other areas, curve numbers were developed by using Table 6-10 (ARCII) in the DCM. The CN values calculated for basins in this analysis align closely with those found in the DBPS, with a weighted average of 61.5. **Table 2** below shows all CN values utilized for this report and their source. Calculations for the composite curve numbers are included in the **Appendix B**. For CN values from the DBPS, see excerpts in **Appendix D**.

A combination of aerial imagery and available public GIS data were used to calculate weighted impervious values. However, the DBPS was found to significantly underestimate imperviousness of the basins; the impervious values in the DBPS ranged between 1% and 4% with most basins having an impervious value of 2%, while this study identified an impervious value of 8.2% for the area tributary to Sub-Regional Pond 1. Calculations for d impervious values are included in the **Appendix B**.

Table 2: CN Values

Cover Description	% Imp	Soil Type			
		A	B	C	D
Open Space	---	39	61	74	80
Gravel	---	76	85	89	91
Paved	---	98	98	98	98
5 Acre Rural Residential (Woods Landuse) *	---	33	58	73	80
5 Acre Rural Residential (Rangeland Landuse) *	---	40	62	75	81
½ Acre Residential*	25	55	71	81	86
2 ½ Acre Rural Residential*	11	45	64	76	81

*Values from the Falcon Drainage Basin Planning Study (DBPS) completed in 2015.

The Manning's n values used to calculate the channelized flow regime for the time of

concentration were developed by comparison with the DBPS HEC-HMS and HEC-RAS models and through physical confirmation at the site. The Manning’s n values used to calculate the overland flow regime for the time of concentration were taken from Table 6-11 in the DCM and can be found in Table 2 below.

Table 3: Manning’s n Roughness Coefficients

Surface Description	n Value
Short Grass Prairie	0.15
Woods – Light underbrush	0.4

There are no additional provisions selected or deviations from the criteria.

HYDRAULIC CRITERIA

The Site is providing one sub regional detention pond which will include water quality capture volume (WQCV), excess urban runoff volume (EURV), and 100-year detention per the DBPS. The site is also providing two additional water quality features. The Site is not significantly increasing the imperviousness of the Site and the Project is maintaining the historic drainage patterns as much as possible and not significantly increasing developed flows. Proposed drainage features on-site have been analyzed and sized for the Major Storm, 100-year design storm event.

The ultimate culvert sizing and full spectrum detention pond sizing shall be done utilizing UD-Culvert and UD-Detention calculations. Due to limitations present in the UD-Detention spreadsheet when large tributary areas are analyzed, the flows and volume entering the pond are greater than those reported in the HEC-HMS model when analyzing similar storm events. However, in this report the HEC-HMS is analyzing the 100-yr, 24-hr storm event vs the UD-detention spreadsheet which can only analyze the 100-yr, 2-hr storm event. Therefore, the HEC-HMS model is resulting in a lower peak flow and a higher peak volume to the detention pond than the UD-detention spreadsheet. To compensate for this, the UD-Detention spreadsheet was calibrated, based on area, to show a similar 100-year flow entering the pond which resulted in a lower inflow volume being shown in UD-detention. The following steps were completed for the UD-Detention spreadsheet calibration:

1. A UD-Detention spreadsheet was created which reflects the total area tributary to the pond. This spreadsheet produced 100-year flows exceeding those in the HEC-HMS model. This spreadsheet produced the required water quality capture volume and excess urban rainfall volume (EURV) for the pond.
2. A second UD-Detention spreadsheet was created for the pond with a reduced area. The area was reduced until the resulting peak flows matched those in the HEC-HMS model. All other parameters were held constant.
3. Volumetric results between the second UD-Detention spreadsheet and the HEC-HMS were compared. Since the UD-Detention runoff volume was less than the HEC-HMS runoff volume, an additional check was then done to ensure the pond sizing would be adequate. This step analyzed the HEC-HMS inflow hydrograph that was being conveyed

to the pond and then reducing it by 20% to reach a pre vs post ratio of 0.8. The outflow hydrograph of the pond would result in the peak flow being reduced to 80% of inflow hydrograph to the pond. Which is within the allowable recommended pre vs post peak flow ratio. This analysis determined a volume difference of 20.84 ac-ft which, results in the approximate pond volume required to reduce the peak outflow to 80% of the peak inflow. The difference in volume was then used to ensure the pond outlet structure was designed to account for the higher volume being conveyed to the pond in the HEC-HMS model.

4. The water quality capture volume and excess urban runoff volume from step one were manually entered into the second UD-Detention spreadsheet and the outlet structure design then became an iterative process to ensure the UD-detention peak outflow results and HEC-HMS pond outflow results were both lower than the 0.9(predevelopmentQ100).
5. The pond discharge curve values from UD-Detention were then input into the HEC-HMS model to match the outflow hydrographs.

After calibration, the Sub-Regional pond is estimated to have a volume of 17.1 ac-ft which is larger than the 11.03 ac-ft pond shown in the DBPS. The reason for this discrepancy is the difference in impervious values between the DBPS and this PDR. The DBPS identified values of between 1% and 4% for the subject basins while, after a more detailed analysis, an average imperviousness of 8.2% was found in this study. The water quality capture volume is determined using an empirical formula based on percent impervious. Incorporating this larger volume causes a 6.07 ac-ft increase in the pond size.

The time of concentration was calculated following the guidance provided in TR-55 by summing the travel time for overland flow, sheet flow, and channelized flow segments along the longest flow path and a factor of 0.6 was then applied to generate the lag time, per Ch. 6 Section 4.6 of the DCM. The longest flow paths were manually delineated to match the drainage patterns in each sub basin based on existing topography. Time of concentration calculations for each basin can be found in **Appendix B**.

Routing of the stormwater runoff and modeling of drainageways for the project site, was done using the NRCS Curve Number Method as required by El Paso County. Routing of channelized flow was based on the Muskingum-Cunge method for all reaches for the existing and proposed model. This aligned with the methodology completed in the DBPS models.

Small existing channels onsite were modeled with a typical section using FlowMaster that has the following characteristics: a longitudinal slope of 0.025, side slopes of 1.3 (H:V), a Manning's n value of 0.030, and a normal depth of 2 feet. Similarly, proposed roadside ditches were modeled in FlowMaster with a typical section that has the following characteristics: a longitudinal slope of 0.025, side slopes of 4.0 (H:V), a Manning's n value of 0.030, and a normal depth of 18 inches. Calculated discharge for the typical channel and typical ditch are approximately 35 cfs and 57 cfs, respectively. See the FlowMaster worksheet in **Appendix C** for further details on the typical channel and typical ditch. The larger main tributary channel was modeled based on an averaging of cross sections within the DBPS HEC-RAS model for the subject reaches. The longest of these, R-PB13, has the following characteristics: a longitudinal slope of 0.02, side slopes of 3:1 (H:V), and a Manning's n value of 0.03. Bank stability will be analyzed using HEC-RAS and will be included in the Final Drainage Report. It is noted that additional channel improvements may be required for channel side slopes steeper than 3:1.

CULVERT SIZING

Detailed sizing of the road culvert crossings will be included in a subsequent Final Drainage Report. Preliminary hydraulic modeling has been completed for the West Tributary per DBPS for existing and future hydrologic conditions and has been included in the appendix. It is anticipated that 2-72” pipes will be sufficient for the stream crossing with an approximate 100-yr flow of 420 cfs.

CHANNEL STABILIZATION

The Falcon Drainage Basin Study identifies the need for channel stabilization improvements with the Site. In particular, the DBPS calls for the construction of 24 small drop structures within the Eagleview Subdivision. See **Appendix E** for drop structure locations based on preliminary hydraulic analysis of the site. Based on this analysis, which identified the channel slope that will be required to maintain compliance with hydraulic criteria, 10 drop structures and 4 rock chutes are proposed. The difference in the number of grade control structures between the DBPS and what is being proposed in this report is due to the DBPS calling for drop structures to be placed within the regional pond. Refer to Chapter 3 in the DCM for the process to obtain reimbursement or credit. See **Appendix F** for an Opinion of Probably Construction Cost (OPCC).

DETENTION AND WATER QUALITY POND SUMMARY

Preliminary detention pond and water quality calculations have been completed. A total of one sub regional, non-jurisdictional detention pond which has been designed for WQCV and 100-year detention and two water quality features. The detention pond has been designed per the DBPS and restricts flow to the historic flow to 420 cfs. It should be noted that this flow is less than the flow of 510 cfs identified in the DBPS. Maintenance of the public sub regional pond will be through El Paso County as public drainage easements are provided around the facility. Water Quality Features 1 and 2 will provide water quality control volumes of 0.095 ac-ft and 0.038 ac-ft, respectively and will be privately owned and maintained. Flows in excess of the water quality control volume will be routed through the spillways of the water quality features.

Pond	Proposed Volume (ac-ft)	100-yr Inflow (Developed) [cfs]	Flow Exiting Pond (Developed) [cfs]	Flow Ratio (Developed vs Historic)	100-yr Flows Detained
SR1	17.1 ac-ft	491.6	420.1	0.85	Yes
WQF1	0.095 ac-ft	184.6	184.6	-	No
WQF2	0.038 ac-ft	78.5	78.5	-	No

HEC-HMS results and UD-detention Pond calculations are provided in **Appendix B** and **Appendix C**.

PAINTBRUSH HILLS- POND C

Adjacent to the southeast corner of the site, Detention Pond C was designed and constructed with Paint Brush Hills Filing No 12 in approximately 2004. Pond C was recently upgraded to include water quality and increased emergency spillway flows with Paint Brush Hills Filing No 14 in the 2021 time frame.

The new spillway associated with redesigned Detention Pond C, discharges stormwater runoff straight to the west via a 3:1 rip-rap slope at the property line. The rate, form and path of runoff does not match historic and should not have been approved by the County. Nonetheless, we recommend an additional 107 CY of 12" rip-rap be placed at the toe of slope. The additional rip-rap toe protection will allow the spillway runoff to turn 90 degrees south and return to the historic flow path. Also, a 18,048 SF easement is warranted on Lot 31 to reduce the chance of building in the path of the emergency spillway

DRAINAGE FACILITY DESIGN

GENERAL CONCEPT

The Eagleview subdivision is a low-density residential development with 2 ½ acre lot sizes. The proposed drainage patterns will match the historic patterns as much as possible and not significantly increasing developed flows. To maintain historic flows, one sub regional detention pond (SR1) is being proposed and will capture and control a portion of the onsite and upstream offsite flows as outlined in the DBPS. The runoff from the proposed roads will be treated before releasing it into the West Tributary reach or on to the downstream properties at the historic discharge points.

Provided in the **Appendix B** are hydrologic calculations utilizing the NRCS/HEC-HMS method for the proposed conditions. Provided in **Appendix C** are the preliminary calculations for the proposed sub regional pond and water quality features. As previously mentioned, the existing and proposed drainage maps can be found in **Appendix E**.

SPECIFIC DETAILS

The existing site is undeveloped land consisting of mostly grassland. The existing conditions of the Site have flows being conveyed from the northwest to the southeast and discharging into the West Tributary reach of the Falcon drainage basin. The site is undeveloped and runoff conditions for the Site were modeled within this study using HEC-HMS. The proposed development looks to preserve the natural drainageways and drainage patterns as much as possible. Culverts will be sized using UD-Culvert and the results will be presented in the Final Drainage Report.

The results from the HEC-HMS model for existing conditions show 515.5 cfs leaving the project site for the 100-year storm event and for the proposed conditions 437.7 cfs is leaving the project site at the south side. It is not anticipated that the development will negatively impact the drainageways and related facilities downstream of the development.

A Proposed Drainage Conditions Map is included **Appendix E** of this report for reference.

The U.S. Army Corps of Engineers (USACE) provided an approved jurisdictional determination (AJD) for the wetlands present within the Eagleview site. The USACE AJD found that the wetlands within the site were isolated and not Waters of the U.S. (WOTUS); therefore impacts to these wetlands will not require permitting under Section 404 of the Clean Water Act. Furthermore, the wetlands onsite are unregulated and shall not incur any additional permitting requirements beyond the scope of El Paso County.

The Site will disturb more than 1 acre and will require a Colorado Discharge Permit System (CDPS) General Permit for Stormwater Discharge Associated with Construction Activities from the Colorado Department of Public Health and Environment (CDPHE). The proposed sub-

regional detention pond will be non-jurisdictional and will therefore require the submission of a Non-Jurisdictional Water Impoundment Structure application form as a part of the platting process.

EXISTING MAJOR DRAINAGE CHANNELS

The DBPS has identified that stream improvements are needed on the West Tributary reach specific to the project Site. The identified improvements within the Site will be designed as part of the Final Drainage Report. The design will look to meet the goals from the DBPS but also minimize the on-site stream mitigation measures needed to the West Tributary reach.

THE FOUR STEP PROCESS

The Project was designed in accordance with the four-step process to minimize adverse impacts of urbanization, as outlined in the El Paso County Engineering Manual for BMP selection as noted below:

Step 1. Employ Runoff Reduction Practices – The project is proposing a low-density residential development that will be designed to minimize the impact to the current existing terrain. The Site's proposed paved roadways will increase the Site's impervious area, however, roadside ditches and channels will be constructed to slow down the runoff velocity and reduce runoff peaks. The sub regional detention pond and two water quality will be used to capture stormwater, provide water quality treatment, and maintain flows discharging off site at or below historic levels.

Step 2. Implement BMPs That Provide a Water Quality Capture Volume with Slow Release – Permanent water quality measures and detention facilities will be necessary for the Project. Temporary water quality and erosion control measures will be provided during construction to prevent sediment laden water from discharging from the Site. Water quality measures are being used for all stormwater that contacts roadways, excluding 0.39 acres which cannot practicably be treated. Per ECM Appendix I Section 1.7.C.A., 20% of the development site or less than 1 acre can be excluded from providing water quality. As mentioned, 0.39 acres of impervious area will not be able to be treated which is less than 1 acre of the overall site. Per ECM Appendix I Section 1.7.1.B, in development areas of low-density housing, water quality is required for all roads, but is not required for the entirety of the large-lots. Due to the Project consisting of single family large-lots, lot imperviousness shall be limited to 10 percent or less. Refer to **Appendix F** for PBMP Tributary Areas map.

Step 3 Stabilize Drainageways– Stabilizing proposed roadside ditches, swales, and channels by designing them with slopes that control the flow rates. Placement of riprap upstream and downstream of culverts to help reduce erosion of the roadside ditches. Check dams will be used in areas with steeper grades to slow the runoff. We anticipate this will minimize erosion. Existing drainage ways will be graded to reduce the velocity of the water to minimize erosion. Efforts to stabilize the

Step 4. Implement Site Specific and Other Source Control BMPs – The erosion control construction BMPs of the Project were designed to reduce contamination. Source control BMPs include the use of vehicle tracking control, culvert protection, stockpile management, and stabilized staging areas.

DRAINAGE FEES AND REIMBURSABLE COSTS

FEES

The project is within the Falcon Drainage Basin (CHWS1400) which is a part of the El Paso County Drainage Basin Fee Program, which is based on the total amount of impervious acres for the Site. Based on impervious calculations in the Appendix, there are 16.95 impervious acres for the proposed project. Current rates are for the 2022 calendar year. See the detailed breakdown below.

- Drainage Fee/Acre = \$34,117 x 121.2 acres x 13.86% x 75% Imp = \$429,831
 - Bridge Fee/Acre = \$4,687 x 121.2 acres x 13.86% Imp = \$78,734
- Total = \$508,565**

IMPROVEMENTS AND REIMBURSABLE COSTS

The Falcon Drainage Basin Study identifies two types improvements for the Site, County Costs or Developer Costs. Items identified as Developer Costs (those incurred by the Developer) are eligible for reimbursement. County Costs are not eligible for reimbursement. Each reach and feature was classified in the DBPS as follows:

Reach/Feature	Description	Type of Cost	Reimbursable
RWT094	South of SR1	Developer Cost	Yes
SR1	Sub-Regional Pond	County Cost	No
RWT080	Northwest of SR1	County Cost	No
RWT092	Northeast of SR1	County Cost	No

The developer intends to amend the DBPS to allow for the costs on reaches RWT080 and RWT092 and Sub-Regional Pond SR1 to become reimbursable by following the process outlined below:

1. Drainage reimbursement request application with PCD.
2. Amendment to the DBPS Memorandum requesting RWT080, RWT092 and Pond SR1 changed from a County Cost to Developer Cost
 - o Amendment request hearing to the Drainage Board and Board of County Commissioners
3. The subsequent Final Drainage Report associated with the Final Plat application will include the following:
 - o Channel analysis to determine the number of drop structures and locations needed to stabilize the channel/meet criteria.
 - o Provide cost estimates for the reimbursable improvements.
 - o Drainage fee section would reference the BoCC resolution (if approved).
4. Once construction of the reimbursable facilities is completed, procedures for Drainage Improvement Credits and Reimbursements outlined in Chapter 3 of the Drainage Criteria Manual will be in effect.

An Engineering Opinion of Probable Cost for all the stormwater improvements is provided for in the Appendix. See **Appendix F** for an Opinion of Probable Construction Cost (OPCC).

Per the costs per reach/ feature provided in DBPS were scaled to the site to determine an estimate of improvement costs as shown below.

DBPS Reach	UNIT	QUANTITY	UNIT COST	COST
RWT-094	LF	2,010	\$ 687.51	\$ 1,381,895
RWT-080	LF	1680	\$ 671.19	\$ 1,127,599
RWT-092	LF	626	\$ 662.04	\$ 414,437
RWT-054	LF	784	\$ 566.49	\$ 444,128
Sub Regional Detention Pond SR1	LS	1	\$ 405,769	\$ 405,769
Engineering/Administration/Contingency	%	35%		\$ 1,320,840
			TOTAL:	\$ 5,094,668

Following the Drainage reimbursement request application approval, the Drainage Fees will be as follows based on DBPS cost estimates:

- Drainage Fees= \$429,831
- Improvement Costs= \$5,094,668
- Reimbursable Costs = \$1,474,717 (Reach RWT-094)
- Reimbursement Credit= \$1,044,886

Fees are deferred at plat recordation due to reimbursement expenses being greater than the required drainage fees.

SUMMARY

This report has been prepared in accordance with El Paso County stormwater criteria. It outlines the Site design for the 5-year and 100-year storm events drainage system. The drainage design presented within this report conforms to the criteria presented in the MANUAL. Additionally, the Site runoff and storm drain facilities will not adversely affect the downstream and surrounding developments.

REFERENCES

1. City of Colorado Springs “Drainage Criteria Manual (DCM) Volume 1”, dated May 2014
2. El Paso County “Engineering Criteria Manual” Volumes 1 & 2, dated October 31, 2018
3. Natural Resources Conservation Service, Web Soil Survey, dated October 5, 2021.
4. Urban Drainage and Flood Control District Drainage Criteria Manuals (UDFCDM), (Volumes 1, 2 and 3), prepared by Wright-McLaughlin Engineers, June 2001, with latest revisions.
5. Flood Insurance Rate Map, El Paso County, Colorado and Incorporated Areas, Map Number 08041C0507F and 08041C0530F, Effective Date March 17, 1997, prepared by the Federal Emergency Management Agency (FEMA).
6. Falcon Drainage Basin Planning Study Selected Plan Report (DBPS), prepared by Matrix Design Group, September 2015. PCD File No. MP132.
7. Paintbrush Hills Fil. 14 FDR. (PCD File No. SF2024)

APPENDIX

APPENDIX A: FIGURES

NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

Coastal Base Flood Elevations shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services
NOAA, NIMS12
National Geodetic Survey
SSMC-3, #9202
1315 East-West Highway
Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

Base Map information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, and Anderson Consulting Engineers, Inc. These data are current as of 2008.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

Corporate limits shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.

Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FIRM) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at <http://www.msc.fema.gov/>.


If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call **1-877-FEMA MAP (1-877-336-2627)** or visit the FEMA website at <http://www.fema.gov/business/nfp>.

El Paso County Vertical Datum Offset Table

Flooding Source	Vertical Datum Offset (ft)

REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION


Panel Location Map

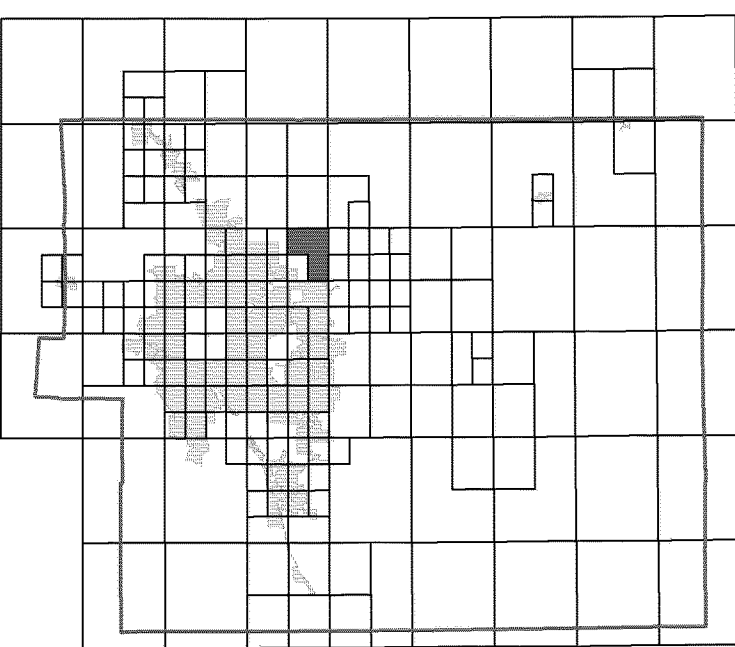

This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).



Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

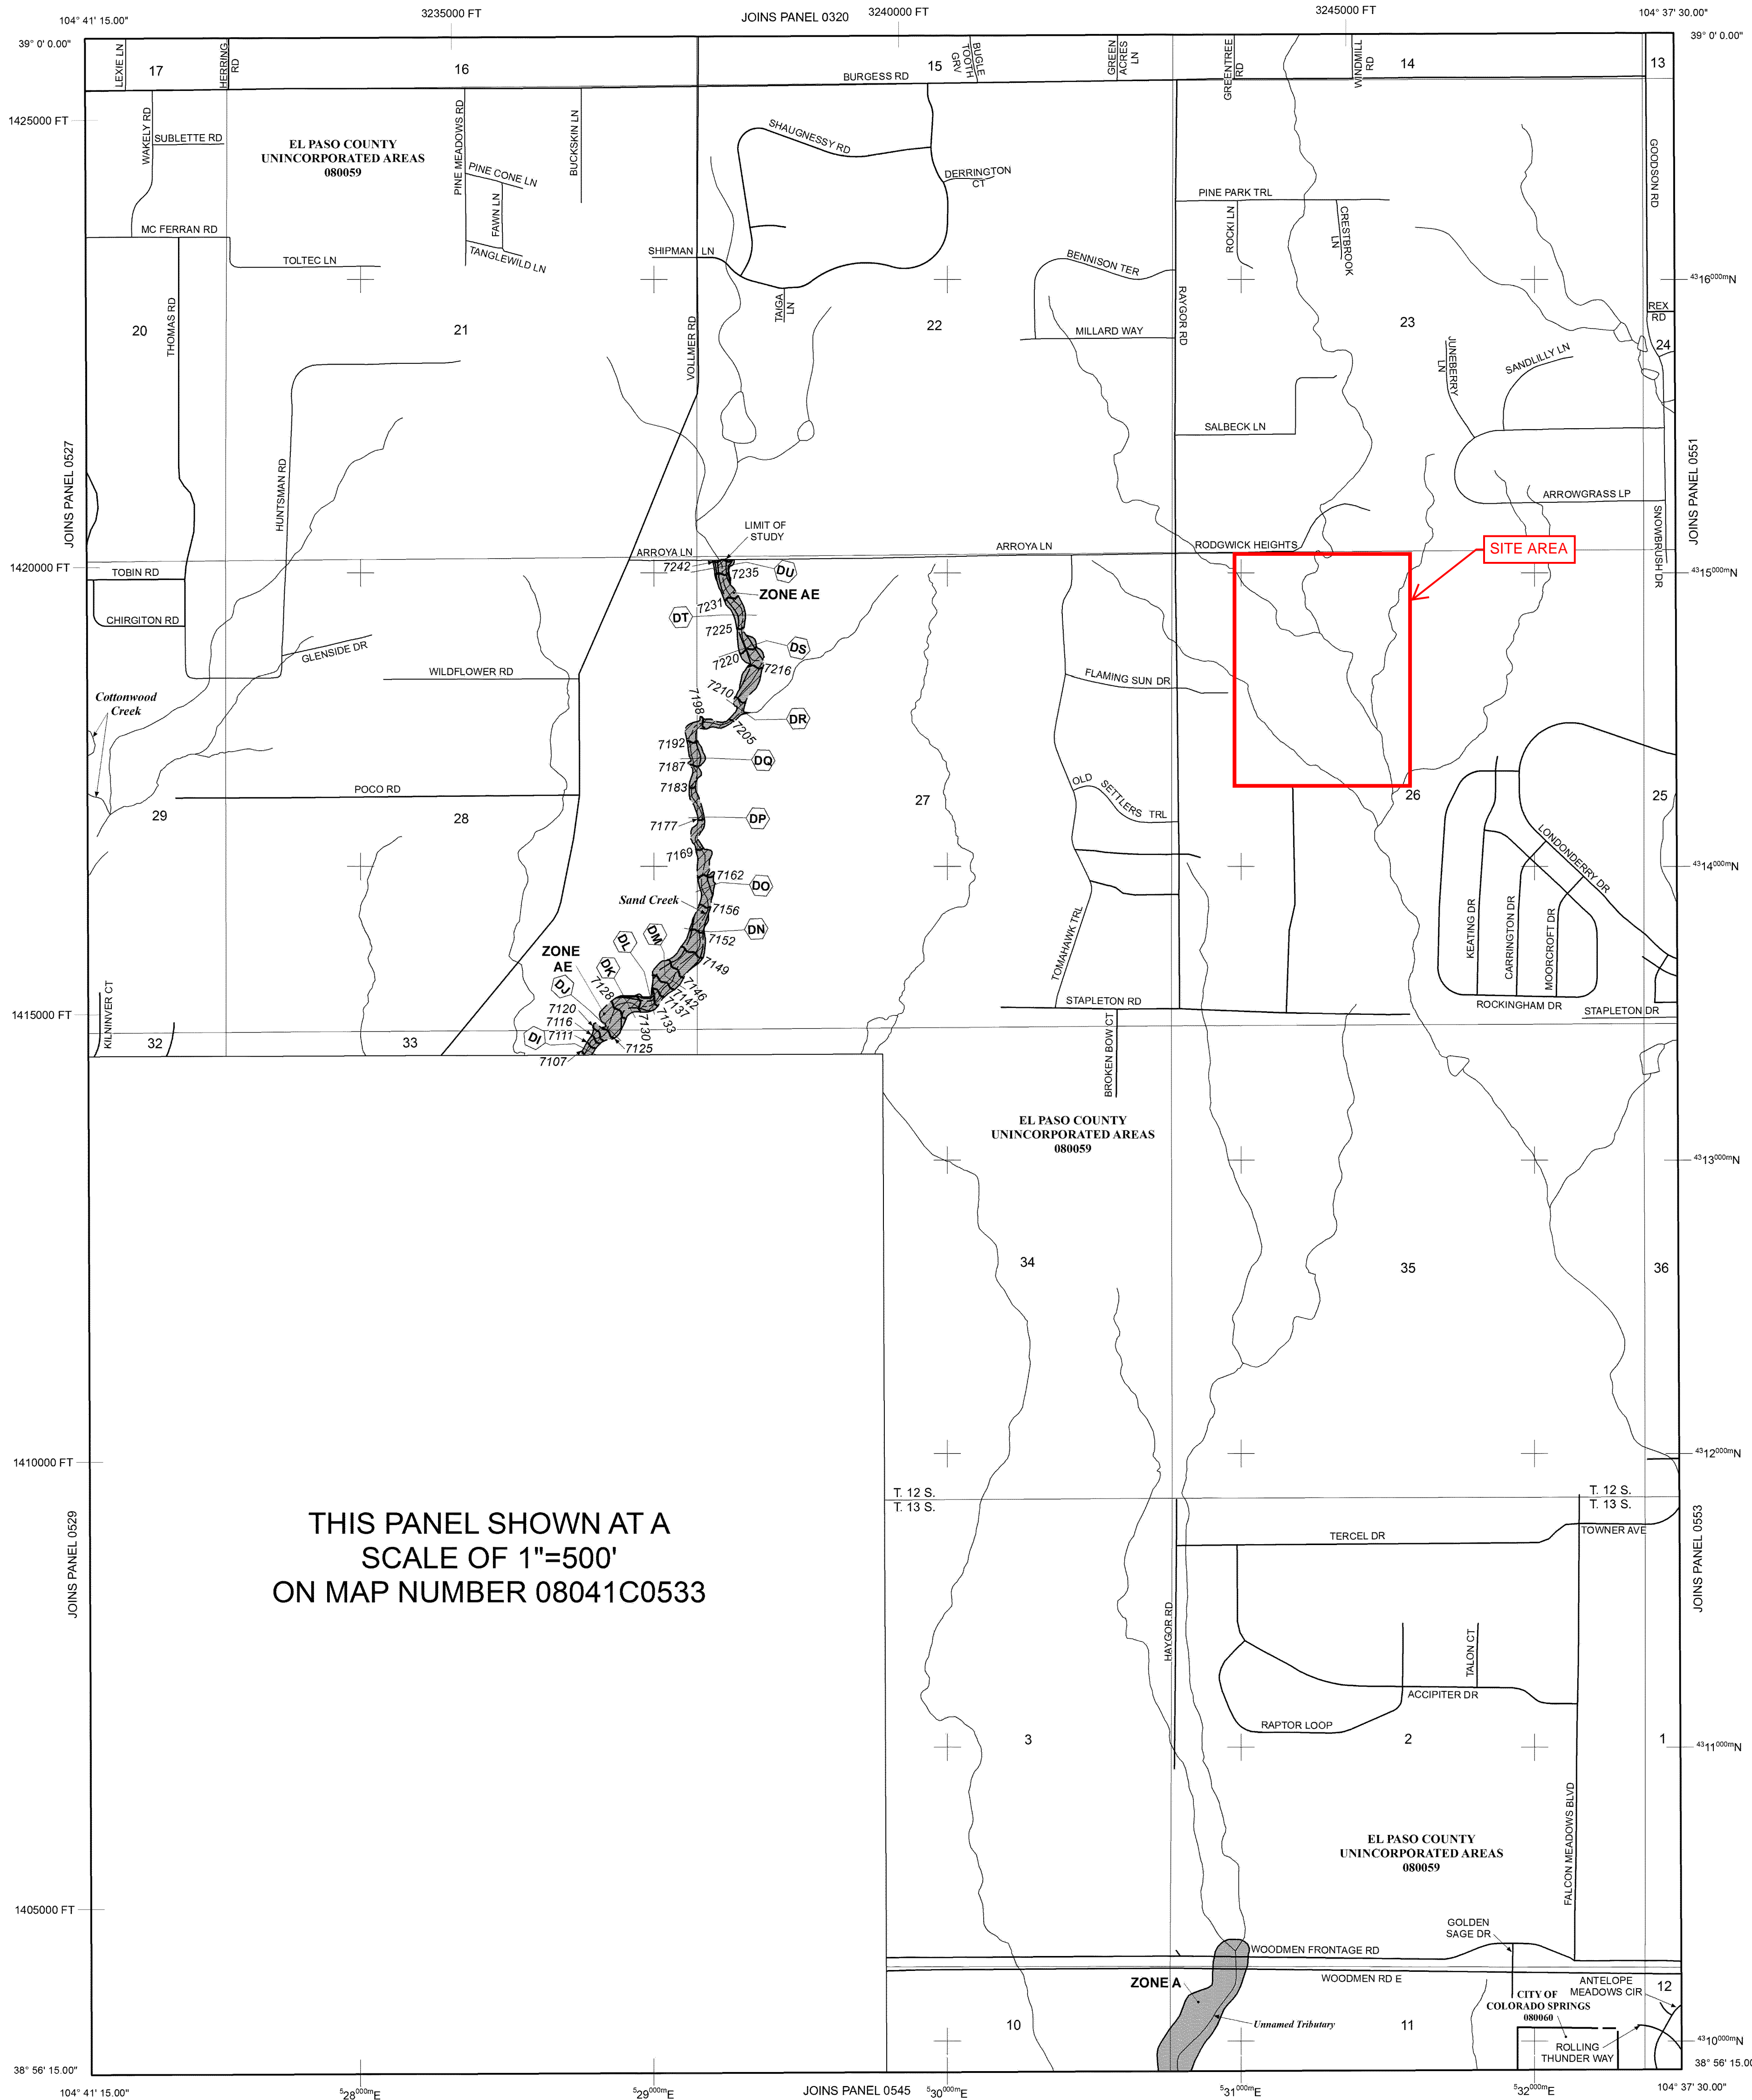

THIS PANEL SHOWN AT A SCALE OF 1"=500' ON MAP NUMBER 08041C0533

NOTE: MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 12 SOUTH, RANGE 65 WEST, AND TOWNSHIP 13 SOUTH, RANGE 65 WEST.

LEGEND

SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD

The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equalled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.

ZONE A No Base Flood Elevations determined.
ZONE AE Base Flood Elevations determined.
ZONE AH Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.

ZONE AO Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.

ZONE AR Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.

ZONE A99 Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.
ZONE V Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.

ZONE VE Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.

FLOODWAY AREAS IN ZONE AE

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.

OTHER FLOOD AREAS

ZONE X Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot, or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.

OTHER AREAS

ZONE X Areas determined to be outside the 0.2% annual chance floodplain.
ZONE D Areas in which flood hazards are undetermined, but possible.

COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS

OTHERWISE PROTECTED AREAS (OPAs)

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.

Floodplain boundary
Floodway boundary
Zone D Boundary
CBRS and OPA boundary

Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities.

Base Flood Elevation line and value; elevation in feet* (EL 987)

Base Flood Elevation value where uniform within zone; elevation in feet*

* Referenced to the North American Vertical Datum of 1988 (NAVD 88)

Cross section line

Transsect line

Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)

1000-meter Universal Transverse Mercator grid ticks, zone 13

5000-foot grid ticks: Colorado State Plane coordinate system, central zone (FIPSZONE 0502), Lambert Conformal Conic Projection

Bench mark (see explanation in Notes to Users section of this FIRM panel)

River Mile

MAP REPOSITORIES
Refer to Map Repositories list on Map Index

EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP
MARCH 17, 1997

EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL
DECEMBER 7, 2018 - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision.

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

MAP SCALE 1" = 1000'

500 0 1000 2000 FEET
300 0 300 600 METERS

NFP PANEL 0535G

FIRM
FLOOD INSURANCE RATE MAP
EL PASO COUNTY,
COLORADO
AND INCORPORATED AREAS

PANEL 535 OF 1300
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:


COMMUNITY	NUMBER	PANEL	SUFFIX
COLORADO SPRINGS, CITY OF	080860	0535	G
EL PASO COUNTY	080059	0535	G

Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

MAP NUMBER
08041C0535G

MAP REVISED
DECEMBER 7, 2018

Federal Emergency Management Agency

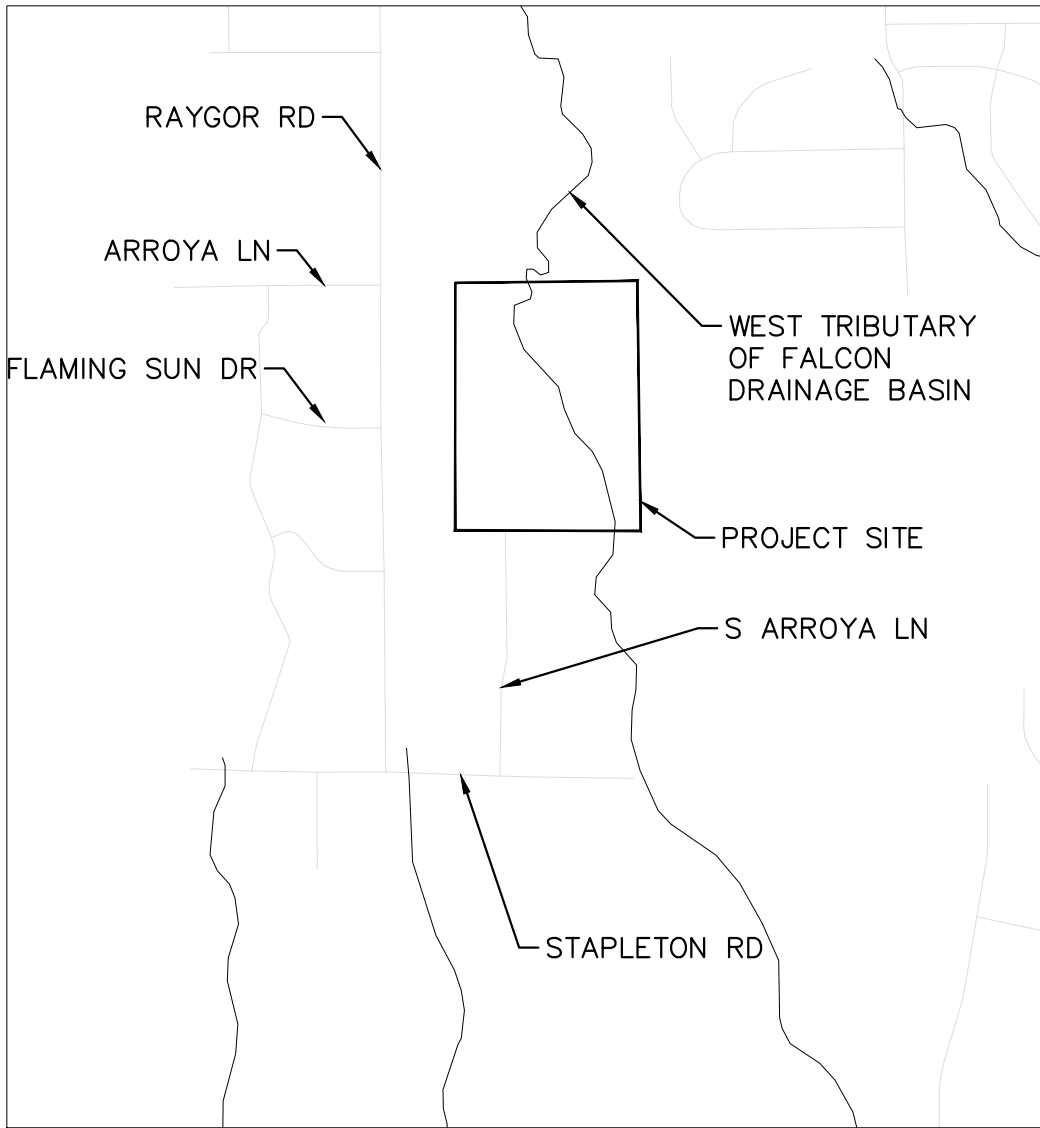

VICINITY MAP
1"=1,000'



APPENDIX B: HYDROLOGY



United States
Department of
Agriculture


NRCS

Natural
Resources
Conservation
Service

A product of the National
Cooperative Soil Survey,
a joint effort of the United
States Department of
Agriculture and other
Federal agencies, State
agencies including the
Agricultural Experiment
Stations, and local
participants

Custom Soil Resource Report for El Paso County Area, Colorado

Eagleview

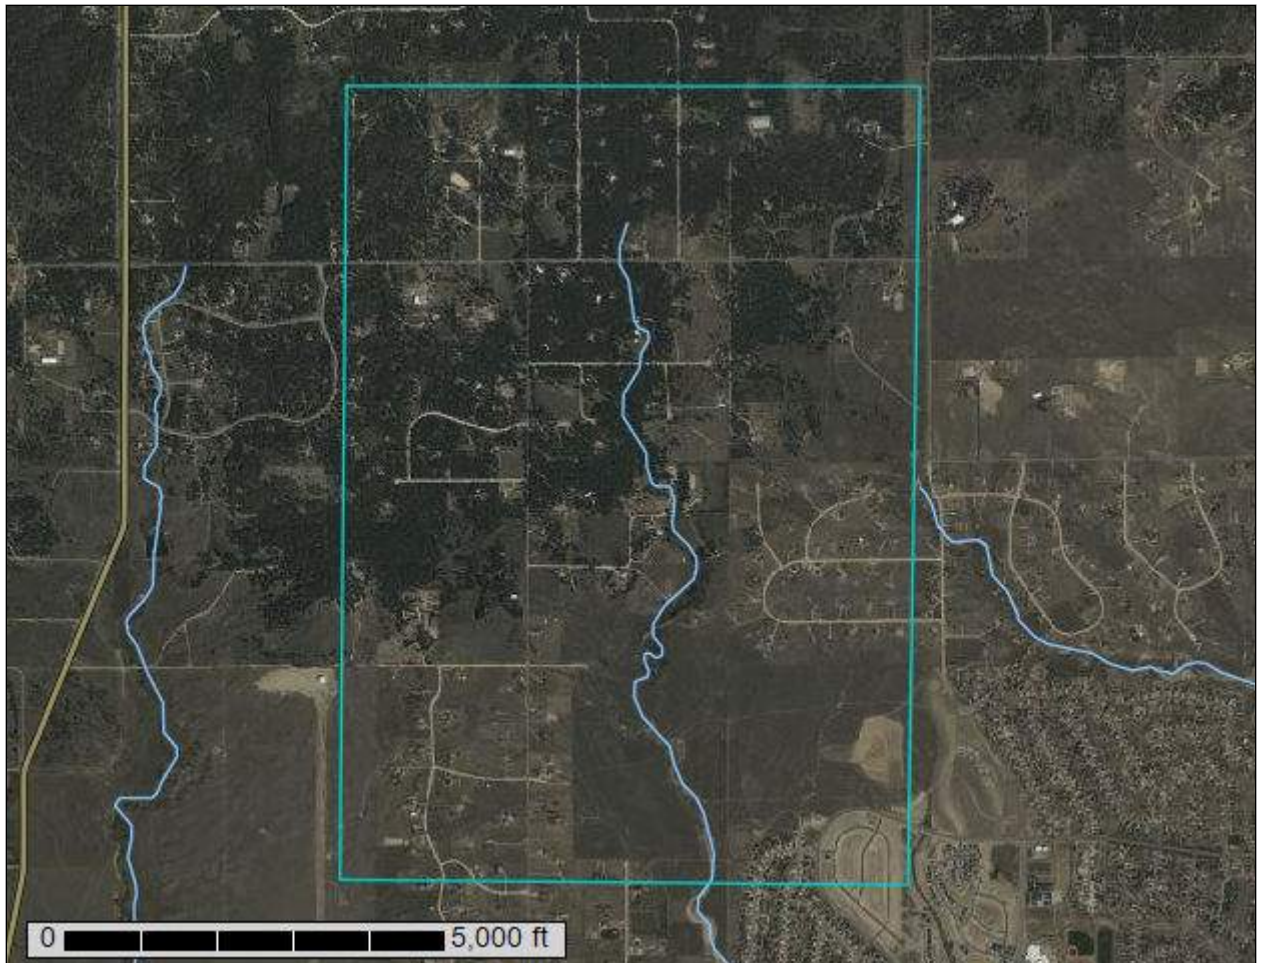

Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface	2
How Soil Surveys Are Made	5
Soil Map	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
El Paso County Area, Colorado.....	13
19—Columbine gravelly sandy loam, 0 to 3 percent slopes.....	13
40—Kettle gravelly loamy sand, 3 to 8 percent slopes.....	14
41—Kettle gravelly loamy sand, 8 to 40 percent slopes.....	15
71—Pring coarse sandy loam, 3 to 8 percent slopes.....	16
References	18

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and


Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.


Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

Custom Soil Resource Report Soil Map

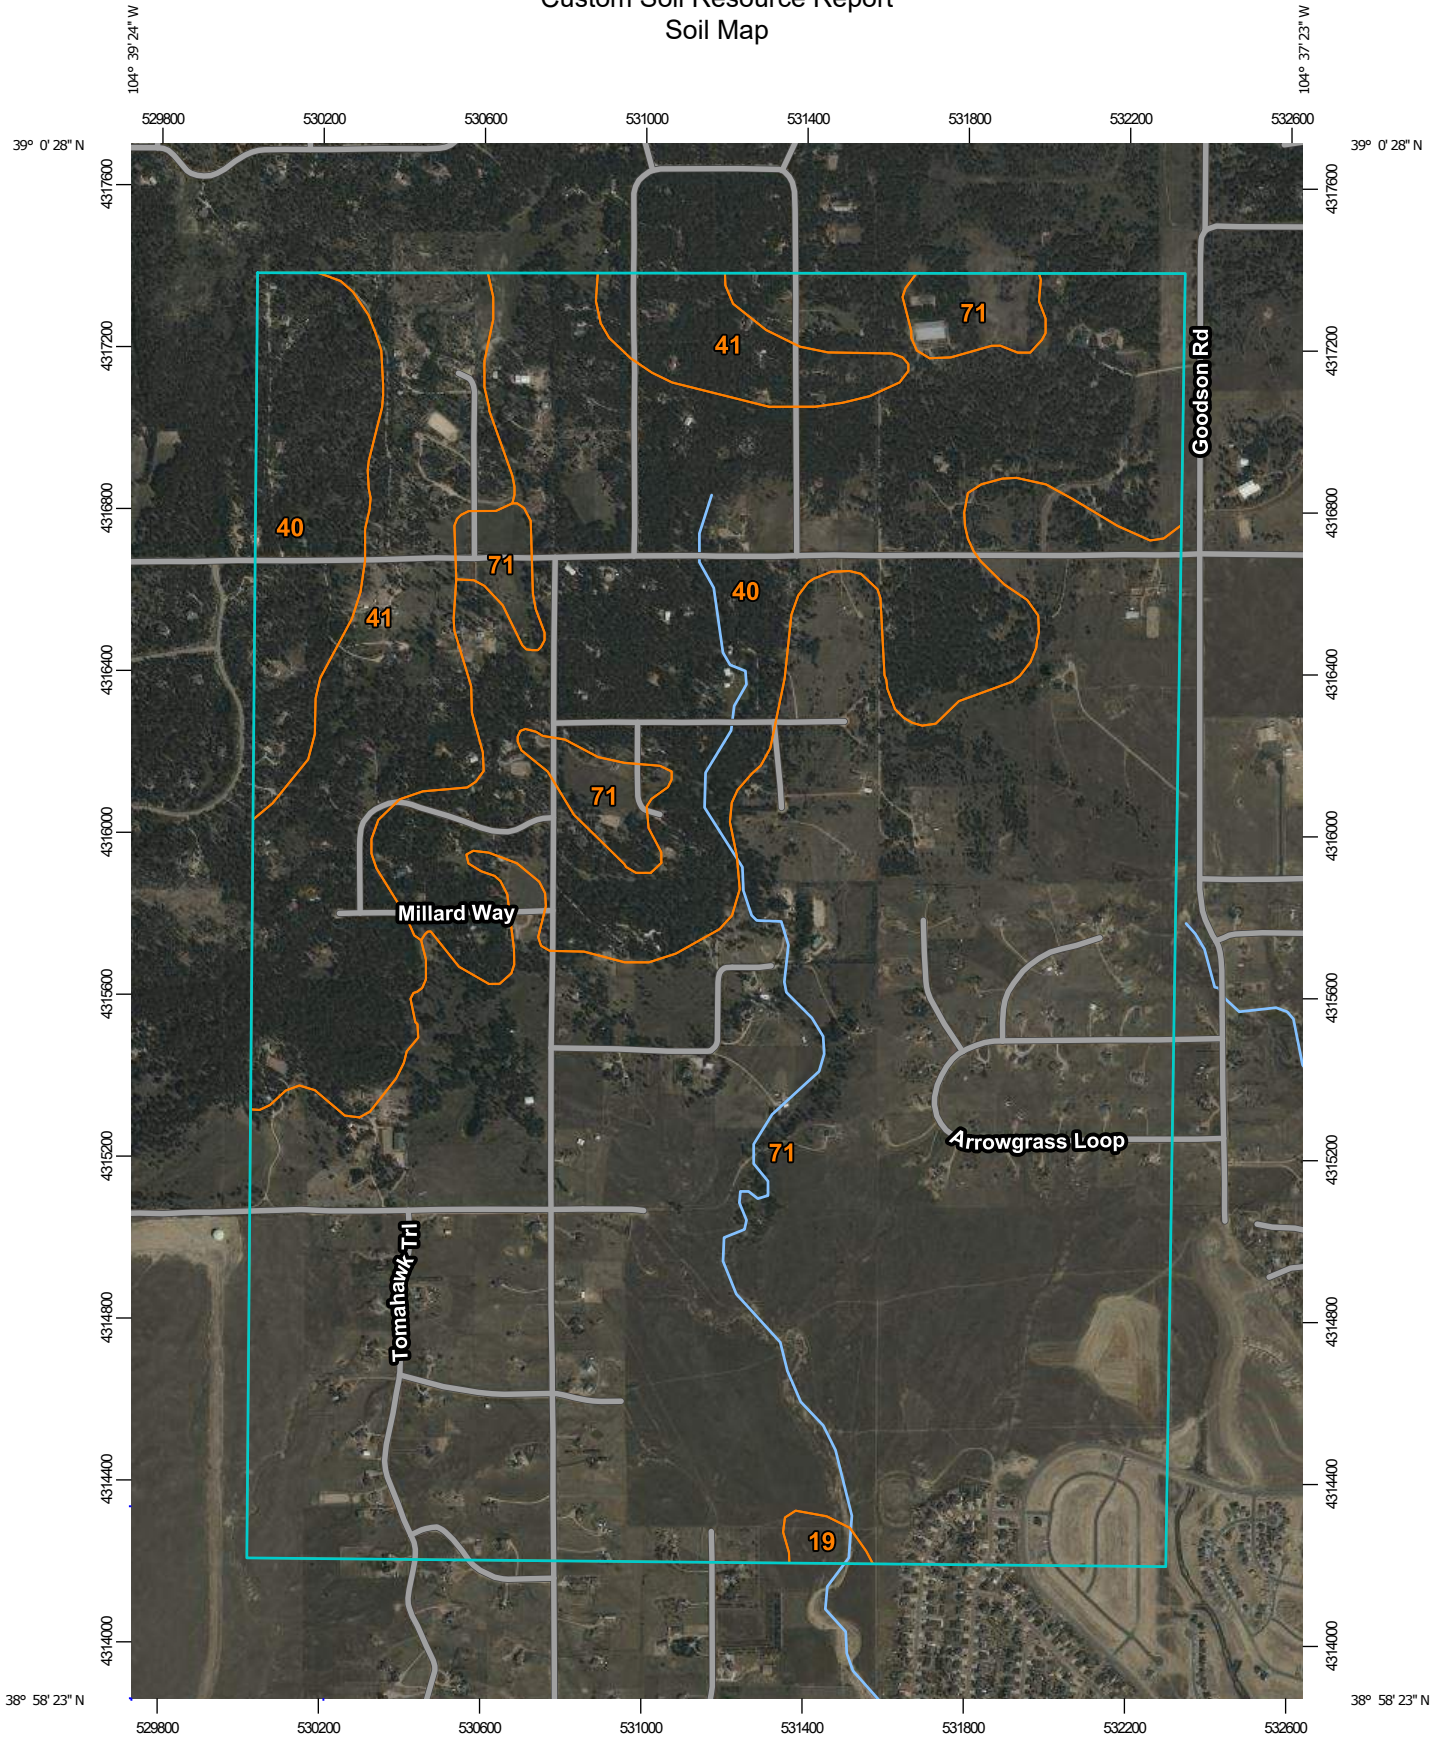

Map Scale: 1:18,700 if printed on A portrait (8.5" x 11") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 13N WGS84


MAP LEGEND

Area of Interest (AOI)

Area of Interest (AOI)




















Soils







 Soil Map Unit Polygons

 Soil Map Unit Lines


 Soil Map Unit Points

Special Point Features






-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features

Water Features

 Streams and Canals

Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado
 Survey Area Data: Version 19, Aug 31, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 11, 2018—Oct 20, 2018

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
19	Columbine gravelly sandy loam, 0 to 3 percent slopes	5.2	0.3%
40	Kettle gravelly loamy sand, 3 to 8 percent slopes	506.7	28.0%
41	Kettle gravelly loamy sand, 8 to 40 percent slopes	205.0	11.3%
71	Pring coarse sandy loam, 3 to 8 percent slopes	1,092.9	60.4%
Totals for Area of Interest		1,809.9	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

Custom Soil Resource Report

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

El Paso County Area, Colorado

19—Columbine gravelly sandy loam, 0 to 3 percent slopes

Map Unit Setting

National map unit symbol: 367p
Elevation: 6,500 to 7,300 feet
Mean annual precipitation: 14 to 16 inches
Mean annual air temperature: 46 to 50 degrees F
Frost-free period: 125 to 145 days
Farmland classification: Not prime farmland

Map Unit Composition

Columbine and similar soils: 97 percent
Minor components: 3 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Columbine

Setting

Landform: Flood plains, fan terraces, fans
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Alluvium

Typical profile

A - 0 to 14 inches: gravelly sandy loam
C - 14 to 60 inches: very gravelly loamy sand

Properties and qualities

Slope: 0 to 3 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Runoff class: Very low
Capacity of the most limiting layer to transmit water (Ksat): High to very high (5.95 to 19.98 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water supply, 0 to 60 inches: Very low (about 2.5 inches)

Interpretive groups

Land capability classification (irrigated): 4e
Land capability classification (nonirrigated): 6e
Hydrologic Soil Group: A
Ecological site: R049XY214CO - Gravelly Foothill
Hydric soil rating: No

Minor Components

Fluvaquentic haplaquolls

Percent of map unit: 1 percent
Landform: Swales
Hydric soil rating: Yes

Other soils

Percent of map unit: 1 percent
Hydric soil rating: No

Pleasant

Percent of map unit: 1 percent
Landform: Depressions
Hydric soil rating: Yes

40—Kettle gravelly loamy sand, 3 to 8 percent slopes

Map Unit Setting

National map unit symbol: 368g
Elevation: 7,000 to 7,700 feet
Farmland classification: Not prime farmland

Map Unit Composition

Kettle and similar soils: 85 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Kettle

Setting

Landform: Hills
Landform position (three-dimensional): Side slope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Sandy alluvium derived from arkose

Typical profile

E - 0 to 16 inches: gravelly loamy sand
Bt - 16 to 40 inches: gravelly sandy loam
C - 40 to 60 inches: extremely gravelly loamy sand

Properties and qualities

Slope: 3 to 8 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Somewhat excessively drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): High (2.00 to 6.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water supply, 0 to 60 inches: Low (about 3.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 4e
Hydrologic Soil Group: B
Ecological site: F048AY908CO - Mixed Conifer

Custom Soil Resource Report

Hydric soil rating: No

Minor Components

Other soils

Percent of map unit:

Hydric soil rating: No

Pleasant

Percent of map unit:

Landform: Depressions

Hydric soil rating: Yes

41—Kettle gravelly loamy sand, 8 to 40 percent slopes

Map Unit Setting

National map unit symbol: 368h

Elevation: 7,000 to 7,700 feet

Farmland classification: Not prime farmland

Map Unit Composition

Kettle and similar soils: 85 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Kettle

Setting

Landform: Hills

Landform position (three-dimensional): Side slope

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Sandy alluvium derived from arkose

Typical profile

E - 0 to 16 inches: gravelly loamy sand

Bt - 16 to 40 inches: gravelly sandy loam

C - 40 to 60 inches: extremely gravelly loamy sand

Properties and qualities

Slope: 8 to 40 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Somewhat excessively drained

Runoff class: Medium

Capacity of the most limiting layer to transmit water (Ksat): High (2.00 to 6.00 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water supply, 0 to 60 inches: Low (about 3.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Custom Soil Resource Report

Land capability classification (nonirrigated): 7e
Hydrologic Soil Group: B
Ecological site: F048AY908CO - Mixed Conifer
Hydric soil rating: No

Minor Components

Pleasant

Percent of map unit:
Landform: Depressions
Hydric soil rating: Yes

Other soils

Percent of map unit:
Hydric soil rating: No

71—Pring coarse sandy loam, 3 to 8 percent slopes

Map Unit Setting

National map unit symbol: 369k
Elevation: 6,800 to 7,600 feet
Farmland classification: Not prime farmland

Map Unit Composition

Pring and similar soils: 85 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Pring

Setting

Landform: Hills
Landform position (three-dimensional): Side slope
Down-slope shape: Linear
Across-slope shape: Linear
Parent material: Arkosic alluvium derived from sedimentary rock

Typical profile

A - 0 to 14 inches: coarse sandy loam
C - 14 to 60 inches: gravelly sandy loam

Properties and qualities

Slope: 3 to 8 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Runoff class: Low
Capacity of the most limiting layer to transmit water (Ksat): High (2.00 to 6.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water supply, 0 to 60 inches: Low (about 6.0 inches)

Custom Soil Resource Report

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: B

Ecological site: R048AY222CO - Loamy Park

Hydric soil rating: No

Minor Components

Pleasant

Percent of map unit:

Landform: Depressions

Hydric soil rating: Yes

Other soils

Percent of map unit:

Hydric soil rating: No

References

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf




HEC-HMS

Project : Eagleview_Subdivision

Basin Model : Eagleview_Existing

Mar 11 13:21:39 MST 2022

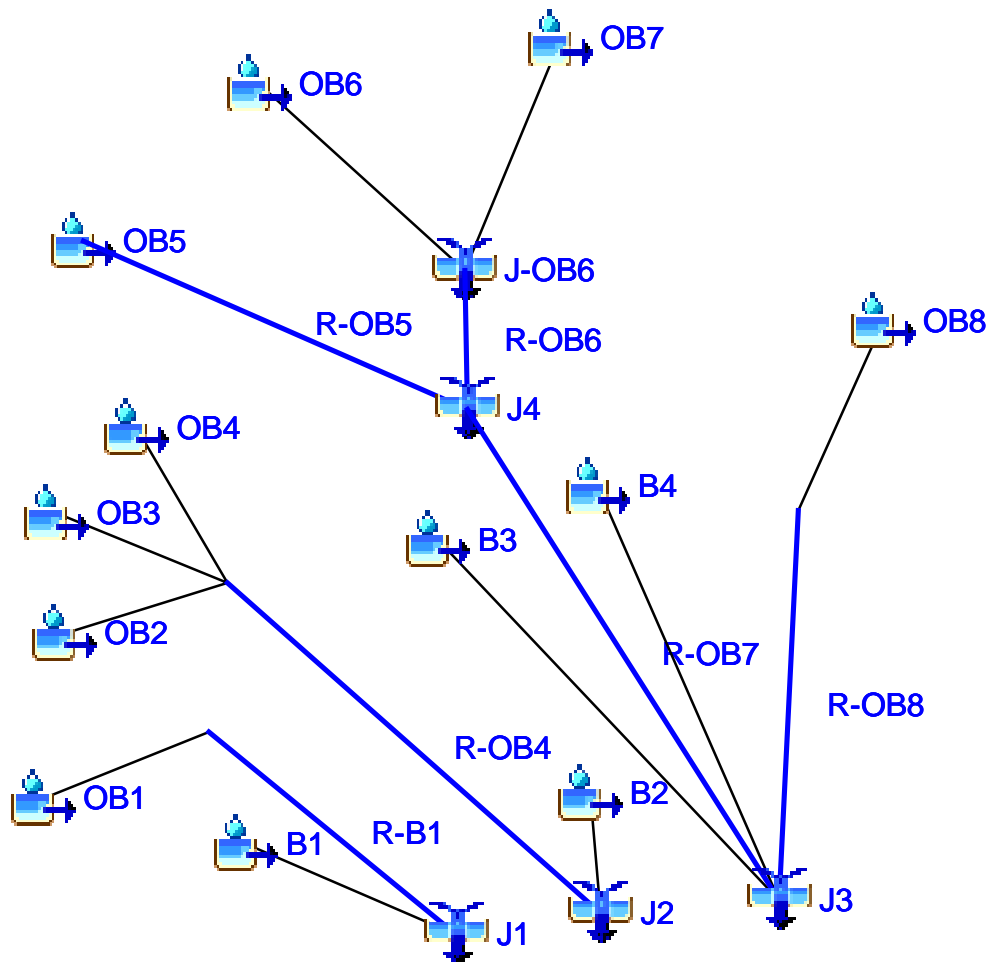

El Paso County Chapter 5: Table 5-2 SCS 24-hr Type II Distribution for TR-20 Input

Hour	Minutes			
	15	30	45	60
1	0.002	0.005	0.008	0.01
2	0.014	0.017	0.020	0.02
3	0.026	0.029	0.032	0.04
4	0.038	0.041	0.044	0.05
5	0.052	0.056	0.060	0.06
6	0.068	0.072	0.076	0.08
7	0.085	0.090	0.095	0.1
8	0.105	0.110	0.115	0.12
9	0.126	0.133	0.140	0.15
10	0.155	0.163	0.172	0.18
11	0.191	0.203	0.218	0.24
12	0.257	0.283	0.387	0.66
13	0.707	0.735	0.758	0.78
14	0.791	0.804	0.815	0.83
15	0.834	0.842	0.849	0.86
16	0.863	0.869	0.875	0.88
17	0.887	0.893	0.898	0.9
18	0.908	0.913	0.918	0.92
19	0.926	0.930	0.934	0.94
20	0.942	0.946	0.950	0.95
21	0.956	0.959	0.962	0.97
22	0.968	0.971	0.974	0.98
23	0.980	0.983	0.986	0.99
24	0.992	0.995	0.998	1

Table 6-2. 24hr Rainfall Depths for Colorado Springs

Return Period	Depths
2-yr	2.1
5-yr	2.7
10-yr	3.2
25-yr	3.6
50-yr	4.2
100-yr	4.6

Design Storm Hyetograph Table

	Time (mins)	Fraction of 1-hr	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
		Rainfall Depth						
	0	0	0	0	0	0	0	0
	15	0.002	0.0042	0.0054	0.0064	0.0072	0.0084	0.0092
	30	0.005	0.0105	0.0135	0.016	0.018	0.021	0.023
	45	0.008	0.0168	0.0216	0.0256	0.0288	0.0336	0.0368
1	60	0.011	0.0231	0.0297	0.0352	0.0396	0.0462	0.0506
	75	0.014	0.0294	0.0378	0.0448	0.0504	0.0588	0.0644
	90	0.017	0.0357	0.0459	0.0544	0.0612	0.0714	0.0782
	105	0.02	0.042	0.054	0.064	0.072	0.084	0.092
2	120	0.023	0.0483	0.0621	0.0736	0.0828	0.0966	0.1058
	135	0.026	0.0546	0.0702	0.0832	0.0936	0.1092	0.1196
	150	0.029	0.0609	0.0783	0.0928	0.1044	0.1218	0.1334
	165	0.032	0.0672	0.0864	0.1024	0.1152	0.1344	0.1472
3	180	0.035	0.0735	0.0945	0.112	0.126	0.147	0.161
	195	0.038	0.0798	0.1026	0.1216	0.1368	0.1596	0.1748
	210	0.041	0.0861	0.1107	0.1312	0.1476	0.1722	0.1886
	225	0.044	0.0924	0.1188	0.1408	0.1584	0.1848	0.2024
4	240	0.048	0.1008	0.1296	0.1536	0.1728	0.2016	0.2208
	255	0.052	0.1092	0.1404	0.1664	0.1872	0.2184	0.2392
	270	0.056	0.1176	0.1512	0.1792	0.2016	0.2352	0.2576
	285	0.06	0.126	0.162	0.192	0.216	0.252	0.276
5	300	0.0604	0.12684	0.16308	0.19328	0.21744	0.25368	0.27784
	315	0.068	0.1428	0.1836	0.2176	0.2448	0.2856	0.3128
	330	0.072	0.1512	0.1944	0.2304	0.2592	0.3024	0.3312
	345	0.076	0.1596	0.2052	0.2432	0.2736	0.3192	0.3496
6	360	0.08	0.168	0.216	0.256	0.288	0.336	0.368
	375	0.085	0.1785	0.2295	0.272	0.306	0.357	0.391
	390	0.09	0.189	0.243	0.288	0.324	0.378	0.414
	405	0.095	0.1995	0.2565	0.304	0.342	0.399	0.437
7	420	0.1	0.21	0.27	0.32	0.36	0.42	0.46
	435	0.105	0.2205	0.2835	0.336	0.378	0.441	0.483
	450	0.11	0.231	0.297	0.352	0.396	0.462	0.506
	465	0.115	0.2415	0.3105	0.368	0.414	0.483	0.529
8	480	0.12	0.252	0.324	0.384	0.432	0.504	0.552
	495	0.126	0.2646	0.3402	0.4032	0.4536	0.5292	0.5796
	510	0.133	0.2793	0.3591	0.4256	0.4788	0.5586	0.6118
	525	0.14	0.294	0.378	0.448	0.504	0.588	0.644
9	540	0.147	0.3087	0.3969	0.4704	0.5292	0.6174	0.6762
	555	0.155	0.3255	0.4185	0.496	0.558	0.651	0.713
	570	0.163	0.3423	0.4401	0.5216	0.5868	0.6846	0.7498
	585	0.172	0.3612	0.4644	0.5504	0.6192	0.7224	0.7912
10	600	0.181	0.3801	0.4887	0.5792	0.6516	0.7602	0.8326
	615	0.191	0.4011	0.5157	0.6112	0.6876	0.8022	0.8786
	630	0.203	0.4263	0.5481	0.6496	0.7308	0.8526	0.9338
	645	0.218	0.4578	0.5886	0.6976	0.7848	0.9156	1.0028
11	660	0.236	0.4956	0.6372	0.7552	0.8496	0.9912	1.0856
	675	0.257	0.5397	0.6939	0.8224	0.9252	1.0794	1.1822
	690	0.283	0.5943	0.7641	0.9056	1.0188	1.1886	1.3018
	705	0.387	0.8127	1.0449	1.2384	1.3932	1.6254	1.7802
12	720	0.663	1.3923	1.7901	2.1216	2.3868	2.7846	3.0498
	735	0.707	1.4847	1.9089	2.2624	2.5452	2.9694	3.2522
	750	0.735	1.5435	1.9845	2.352	2.646	3.087	3.381
	765	0.758	1.5918	2.0466	2.4256	2.7288	3.1836	3.4868
13	780	0.776	1.6296	2.0952	2.4832	2.7936	3.2592	3.5696
	795	0.791	1.6611	2.1357	2.5312	2.8476	3.3222	3.6386
	810	0.804	1.6884	2.1708	2.5728	2.8944	3.3768	3.6984
	825	0.815	1.7115	2.2005	2.608	2.934	3.423	3.749

14	840	0.825	1.7325	2.2275	2.64	2.97	3.465	3.795
	855	0.834	1.7514	2.2518	2.6688	3.0024	3.5028	3.8364
	870	0.842	1.7682	2.2734	2.6944	3.0312	3.5364	3.8732
	885	0.849	1.7829	2.2923	2.7168	3.0564	3.5658	3.9054
15	900	0.856	1.7976	2.3112	2.7392	3.0816	3.5952	3.9376
	915	0.863	1.8123	2.3301	2.7616	3.1068	3.6246	3.9698
	930	0.869	1.8249	2.3463	2.7808	3.1284	3.6498	3.9974
	945	0.875	1.8375	2.3625	2.8	3.15	3.675	4.025
16	960	0.881	1.8501	2.3787	2.8192	3.1716	3.7002	4.0526
	975	0.887	1.8627	2.3949	2.8384	3.1932	3.7254	4.0802
	990	0.893	1.8753	2.4111	2.8576	3.2148	3.7506	4.1078
	1005	0.898	1.8858	2.4246	2.8736	3.2328	3.7716	4.1308
17	1020	0.903	1.8963	2.4381	2.8896	3.2508	3.7926	4.1538
	1035	0.908	1.9068	2.4516	2.9056	3.2688	3.8136	4.1768
	1050	0.913	1.9173	2.4651	2.9216	3.2868	3.8346	4.1998
	1065	0.918	1.9278	2.4786	2.9376	3.3048	3.8556	4.2228
18	1080	0.922	1.9362	2.4894	2.9504	3.3192	3.8724	4.2412
	1095	0.926	1.9446	2.5002	2.9632	3.3336	3.8892	4.2596
	1110	0.93	1.953	2.511	2.976	3.348	3.906	4.278
	1125	0.934	1.9614	2.5218	2.9888	3.3624	3.9228	4.2964
19	1140	0.938	1.9698	2.5326	3.0016	3.3768	3.9396	4.3148
	1155	0.942	1.9782	2.5434	3.0144	3.3912	3.9564	4.3332
	1170	0.946	1.9866	2.5542	3.0272	3.4056	3.9732	4.3516
	1185	0.95	1.995	2.565	3.04	3.42	3.99	4.37
20	1200	0.953	2.0013	2.5731	3.0496	3.4308	4.0026	4.3838
	1215	0.956	2.0076	2.5812	3.0592	3.4416	4.0152	4.3976
	1230	0.959	2.0139	2.5893	3.0688	3.4524	4.0278	4.4114
	1245	0.962	2.0202	2.5974	3.0784	3.4632	4.0404	4.4252
21	1260	0.965	2.0265	2.6055	3.088	3.474	4.053	4.439
	1275	0.968	2.0328	2.6136	3.0976	3.4848	4.0656	4.4528
	1290	0.971	2.0391	2.6217	3.1072	3.4956	4.0782	4.4666
	1305	0.974	2.0454	2.6298	3.1168	3.5064	4.0908	4.4804
22	1320	0.977	2.0517	2.6379	3.1264	3.5172	4.1034	4.4942
	1335	0.98	2.058	2.646	3.136	3.528	4.116	4.508
	1350	0.983	2.0643	2.6541	3.1456	3.5388	4.1286	4.5218
	1365	0.986	2.0706	2.6622	3.1552	3.5496	4.1412	4.5356
23	1380	0.989	2.0769	2.6703	3.1648	3.5604	4.1538	4.5494
	1395	0.992	2.0832	2.6784	3.1744	3.5712	4.1664	4.5632
	1410	0.995	2.0895	2.6865	3.184	3.582	4.179	4.577
	1425	0.998	2.0958	2.6946	3.1936	3.5928	4.1916	4.5908
24	1440	1	2.1	2.7	3.2	3.6	4.2	4.6

IMPERVIOUS FACTOR CALCULATION TABLE - EXISTING CONDITIONS

	Basin	Area (Acre)	Open Space (2%)	Buildings (100%)	Paved Roadway (100%)	Gravel Roadway (80%)	Total % Check	Weighted Impervious
Onsite	B1	5.55	93%	0%	0%	6%	99%	7%
	B2	41.43	100%	0%	0%	0%	100%	2%
	B3	59.54	100%	0%	0%	0%	100%	2%
	B4	14.68	100%	0%	0%	0%	100%	2%
Offsite	OB1	10.37	93%	2%	4%	2%	100%	9%
	OB2	28.06	90%	3%	3%	5%	100%	11%
	OB3	43.44	92%	2%	2%	4%	100%	9%
	OB4	10.50	87%	4%	5%	4%	100%	13%
	OB5	143.82	94%	2%	1%	3%	100%	7%
	OB6	118.40	93%	1%	2%	4%	100%	8%
	OB7	421.43	93%	2%	1%	4%	100%	8%
	OB8	33.08	93%	2%	1%	5%	100%	8%
Total		930.30						10.6%

Pre Runoff Analysis
Time of Concentration

Project Information

Project Name: Eagleview
 KHA Project #: 106288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Minimum Time of Concentration 5.0 minutes
 2YR-24HR Rainfall, P2 2.10

Pre-Development												
Drainage Area: OB1												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.073	0.15	2.10						17.35	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	1118.00	0.038			U				3.14	5.93	
Pre-Development Time of Concentration, OB1											23.28	13.97

Pre-Development												
Drainage Area: OB2												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.063	0.15	2.10						16.41	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	554.00	0.046			U				3.45	2.67	
CHANNEL	T2 CHANNEL FLOW	841.00	0.029	0.05		U	9.50	6.60	1.44	6.45	2.17	
Pre-Development Time of Concentration, OB2											23.26	13.95

Pre-Development												
Drainage Area: OB3												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.074	0.15	2.10						17.26	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	2436.00	0.034			U				2.97	13.65	
Pre-Development Time of Concentration, OB3											30.91	18.55

Pre-Development												
Drainage Area: OB4												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.043	0.15	2.10						21.65	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	783.00	0.038			U				3.16	4.13	
CHANNEL	T2 CHANNEL FLOW	577.00	0.028	0.05		U	9.50	6.60	1.44	6.36	1.51	
Pre-Development Time of Concentration, OB4											27.29	16.38

Pre-Development												
Drainage Area: OB5												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.037	0.40	2.10						49.91	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	3838.00	0.033			U				2.93	21.83	
CHANNEL	T2 CHANNEL FLOW	1407.00	0.024	0.04		U	9.50	6.60	1.44	7.36	3.19	
Pre-Development Time of Concentration, OB5											74.93	44.96

Pre-Development												
Drainage Area: OB6												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.064	0.40	2.10						40.09	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	2569.00	0.038			U				3.14	13.62	
CHANNEL	T2 CHANNEL FLOW	2110.00	0.027	0.04		U	9.50	6.60	1.44	7.78	4.55	
Pre-Development Time of Concentration, OB6											58.25	34.95

Pre-Development												
Drainage Area: OB7												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.028	0.40	2.10						55.80	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	2068.00	0.036			U				3.06	11.26	
CHANNEL	T2 CHANNEL FLOW	6198.00	0.03	0.04		U	12.00	22.00	0.55	4.09	25.29	
Pre-Development Time of Concentration, OB7											92.35	55.41

Pre-Development												
Drainage Area: OB8												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.029	0.15	2.10						25.10	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	1117.00	0.043			U				3.34	5.57	
CHANNEL	T2 CHANNEL FLOW	762.00	0.033	0.03		U	9.50	6.60	1.44	13.43	1.11	
Pre-Development Time of Concentration, OB8											31.78	19.07

Pre-Development												
Drainage Area: B1												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.027	0.15	2.10						25.83	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	368.00	0.033			U				2.91	2.11	
CHANNEL	T2 CHANNEL FLOW	210.00	0.034	0.03		U	9.50	6.60	1.44	11.68	0.30	
Pre-Development Time of Concentration, B1											28.24	16.94

Pre-Development												
Drainage Area: B2												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.022	0.15	2.10						28.04	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	737.00	0.025			U				2.55	4.82	
CHANNEL	T2 CHANNEL FLOW	1086.00	0.02	0.03		U	9.50	6.60	1.44	9.18	1.07	
Pre-Development Time of Concentration, B2											34.83	20.90

Pre-Development												
Drainage Area: B3												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
CHANNEL	T1 CHANNEL FLOW	2965.00	0.02	0.03		U	14.00	34.50	0.41	3.58	13.60	
Pre-Development Time of Concentration, B3											13.88	8.33

Pre Runoff Analysis
Time of Concentration

Project Information

Project Name: Eagleview
 KHA Project #: 106288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Minimum Time of Concentration 5.0 minutes
 2YR-24HR Rainfall, P2 2.10

Pre-Development												
Drainage Area: B4												
		Row Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Faced or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.020	0.15	2.10						29.13	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	181.00	0.044			U				3.37	0.90	
CHANNEL	T3 CHANNEL FLOW	1548.00	0.033	0.03		U	9.50	6.60	1.44	11.50	2.24	
Pre-Development Time of Concentration, B4											32.27	19.36

Pre Runoff Analysis
Composite CN

Project Name: Eagleview
 KHA Project #: 196288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Pre-Development					
Drainage Area: OB1					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	9.79	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.38	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	0.20	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB1			63.76	10.37	0.569

Pre-Development					
Drainage Area: OB2					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	25.92	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.86	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	1.28	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB2			64.16	28.06	0.559

Pre-Development					
Drainage Area: OB3					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	40.88	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.89	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	1.67	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB3			63.62	43.44	0.572

Pre-Development					
Drainage Area: OB4					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	9.55	0.00
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.52	0.55
IMPERVIOUS	Gravel (including right of way)	B	85.00	0.43	9.95
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB4			64.71	10.50	0.545

Pre-Development					
Drainage Area: OB5					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	28.58	--
RESIDENTIAL	RR-5 (Woods Landuse)	B	58.00	109.48	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	1.12	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	4.64	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB5			59.98	143.82	0.667

Pre-Development					
Drainage Area: OB6					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	60.64	--
RESIDENTIAL	RR-5 (Woods Landuse)	B	58.00	51.19	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	2.04	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	4.53	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB6			61.77	118.40	0.619

Pre Runoff Analysis
Composite CN

Project Name: Eagleview
 KHA Project #: 196288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Pre-Development					
Drainage Area: OB7					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	122.08	--
RESIDENTIAL	RR-5 (Woods Landuse)	B	58.00	259.48	--
RESIDENTIAL	2.5 acre	B	64.00	16.02	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	5.46	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	18.17	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB7			61.07	421.20	0.637

Pre-Development					
Drainage Area: OB8					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	8.71	--
RESIDENTIAL	2.5 acre	B	64.00	21.76	--
RESIDENTIAL	1/2 acre (25% Imp.)	B	71.00	0.79	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.24	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	1.57	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB8			64.89	33.07	0.541

Pre-Development					
Drainage Area: B1					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
OPEN_SPACE	Good condition (grass cover >75%)	B	61.00	5.55	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - B1			61.00	5.55	0.639

Pre-Development					
Drainage Area: B2					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
OPEN_SPACE	Good condition (grass cover >75%)	A	39.00	0.61	--
OPEN_SPACE	Good condition (grass cover >75%)	B	61.00	40.82	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - B2			60.68	41.43	0.648

Pre-Development					
Drainage Area: B3					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
OPEN_SPACE	Good condition (grass cover >75%)	A	39.00	0.28	--
OPEN_SPACE	Good condition (grass cover >75%)	B	61.00	59.27	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - B3			60.90	59.54	0.642



Pre-Development					
Drainage Area: B4					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
OPEN_SPACE	Good condition (grass cover >75%)	B	61.00	14.68	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - B4			61.00	14.68	0.639

Project: Eagleview_Subdivision Simulation Run: EV 5-yr Ex. Type II

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
 End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
 Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (AC-FT)
B1	0.0091800	3.0	01Oct2021, 12:11	0.3
B2	0.0647266	15.4	01Oct2021, 12:16	1.8
B3	0.0930359	36.4	01Oct2021, 12:04	2.7
B4	0.0229422	5.8	01Oct2021, 12:14	0.7
J1	0.0253831	10.1	01Oct2021, 12:11	1.0
J2	0.1928516	67.5	01Oct2021, 12:15	7.3
J3	1.2354980	183.1	01Oct2021, 12:47	42.8
J4	1.0678500	169.2	01Oct2021, 12:46	37.4
J-OB6	0.8431300	132.4	01Oct2021, 12:45	30.1
OB1	0.0162031	7.1	01Oct2021, 12:08	0.7
OB2	0.0438438	20.6	01Oct2021, 12:08	1.9
OB3	0.0678750	25.3	01Oct2021, 12:13	2.8
OB4	0.0164062	7.5	01Oct2021, 12:10	0.8
OB5	0.2247200	36.8	01Oct2021, 12:42	7.4
OB6	0.1850100	40.8	01Oct2021, 12:30	6.8
OB7	0.6581200	101.4	01Oct2021, 12:53	23.3
OB8	0.0516699	19.5	01Oct2021, 12:13	2.1
R-B1	0.0162031	7.1	01Oct2021, 12:11	0.7
R-OB4	0.1281250	52.2	01Oct2021, 12:14	5.4
R-OB5	0.2247200	36.8	01Oct2021, 12:45	7.4
R-OB6	0.8431300	132.4	01Oct2021, 12:46	30.0
R-OB7	1.0678500	169.2	01Oct2021, 12:49	37.3
R-OB8	0.0516699	19.4	01Oct2021, 12:17	2.1

Subbasin "B1" Results for Run "EV 5-yr Ex. Type II"

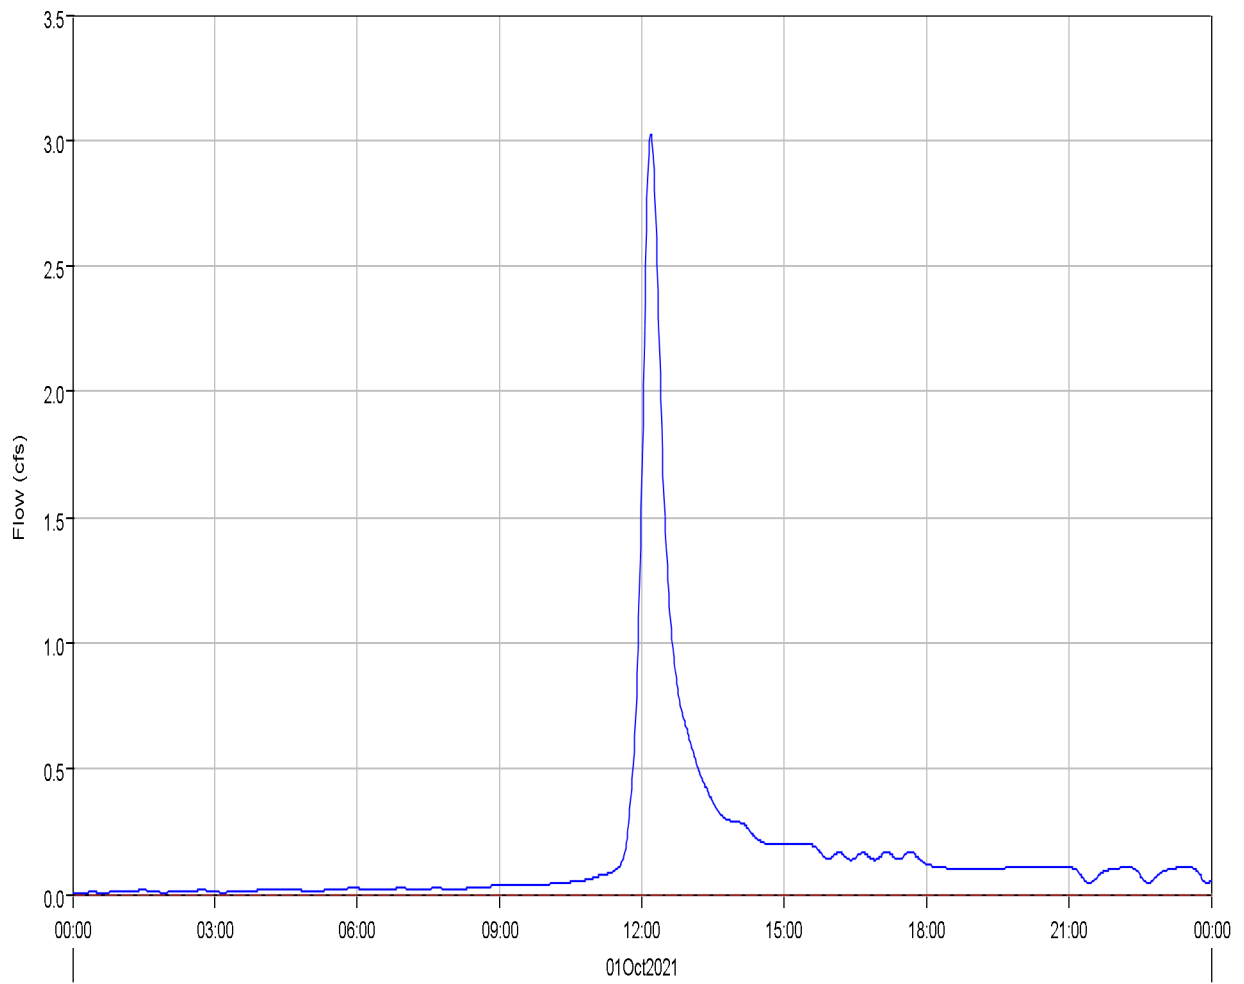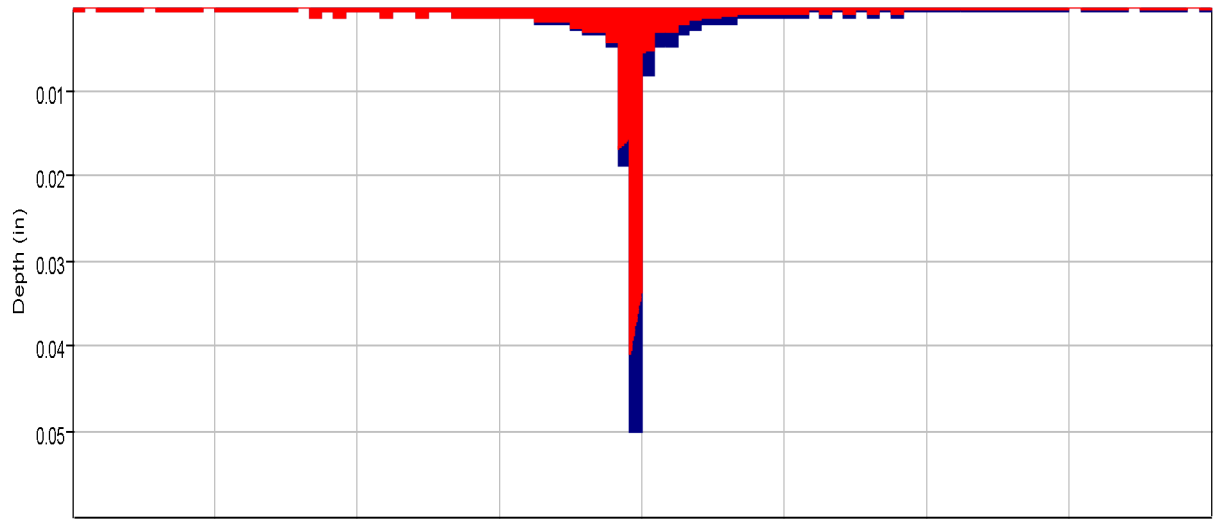

Run:EV 5-yr Ex. Type II Element:B1 Result:Precipitation Run:EV 5-yr Ex. Type II Element:B1 Result:Precipitation Loss Run:EV 5-yr Ex. Type II Element:B1 Result:Outflow
Run:EV 5-yr Ex. Type II Element:B1 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: B1



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	3.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:11
Total Precipitation :	1.3 (AC-FT)	Total Direct Runoff :	0.3 (AC-FT)
Total Loss :	1.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.3 (AC-FT)	Discharge :	0.3 (AC-FT)

Subbasin "B2" Results for Run "EV 5-yr Ex. Type II"

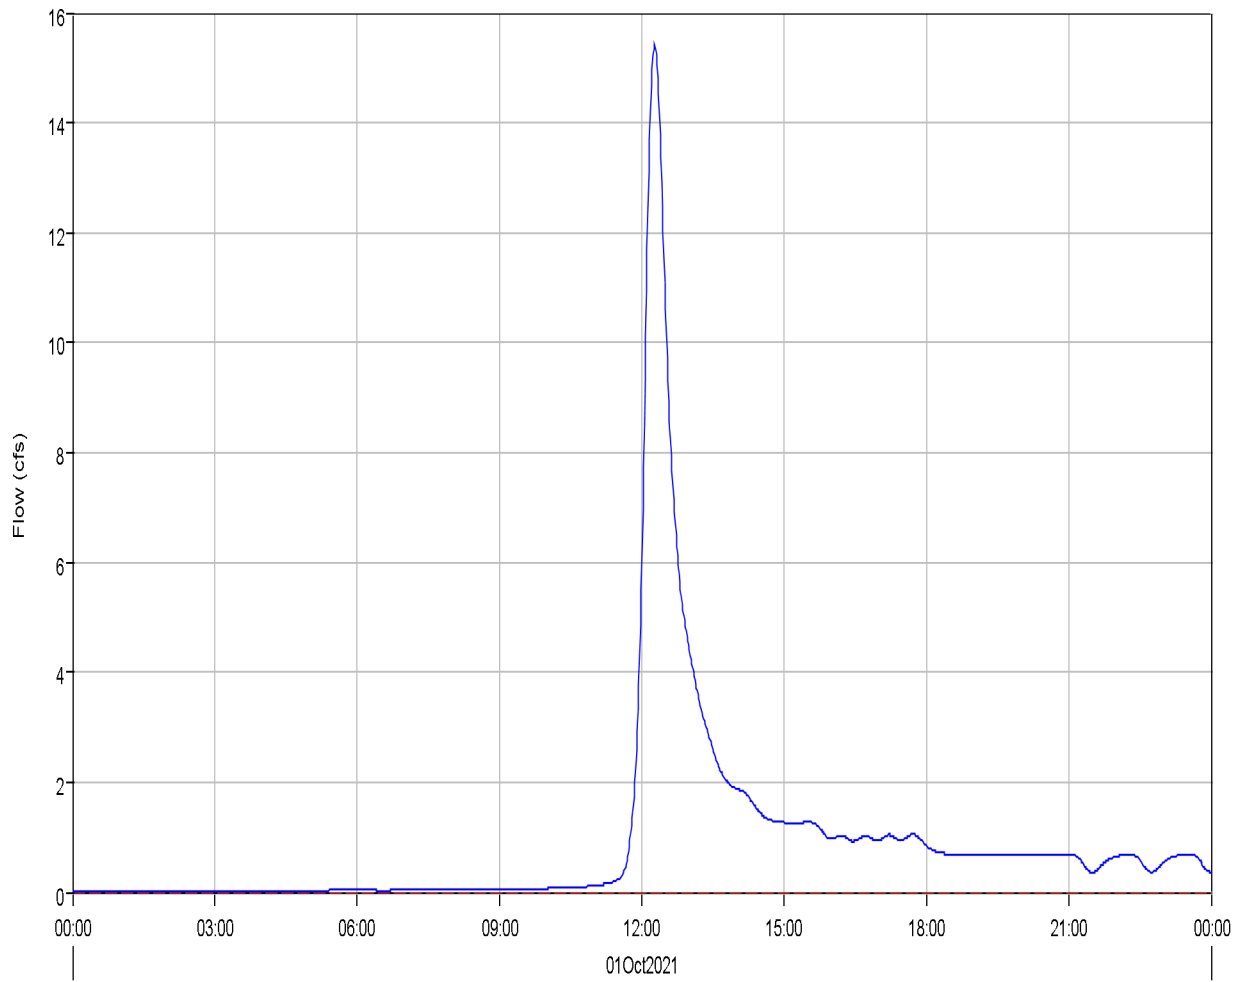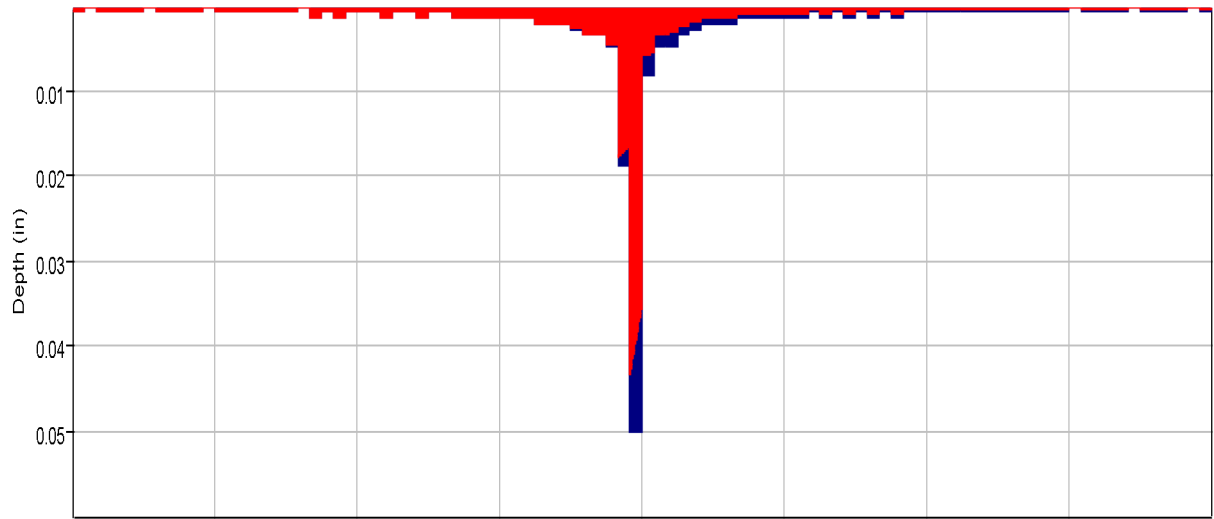



Run:EV 5-yr Ex. Type II Element:B2 Result:Precipitation Run:EV 5-yr Ex. Type II Element:B2 Result:Precipitation Loss Run:EV 5-yr Ex. Type II Element:B2 Result:Outflow
Run:EV 5-yr Ex. Type II Element:B2 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: B2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm
Volume Units: AC-FT

Computed Results

Peak Discharge :	15.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:16
Total Precipitation :	9.3 (AC-FT)	Total Direct Runoff :	1.8 (AC-FT)
Total Loss :	7.5 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.9 (AC-FT)	Discharge :	1.8 (AC-FT)

Subbasin "B3" Results for Run "EV 5-yr Ex. Type II"

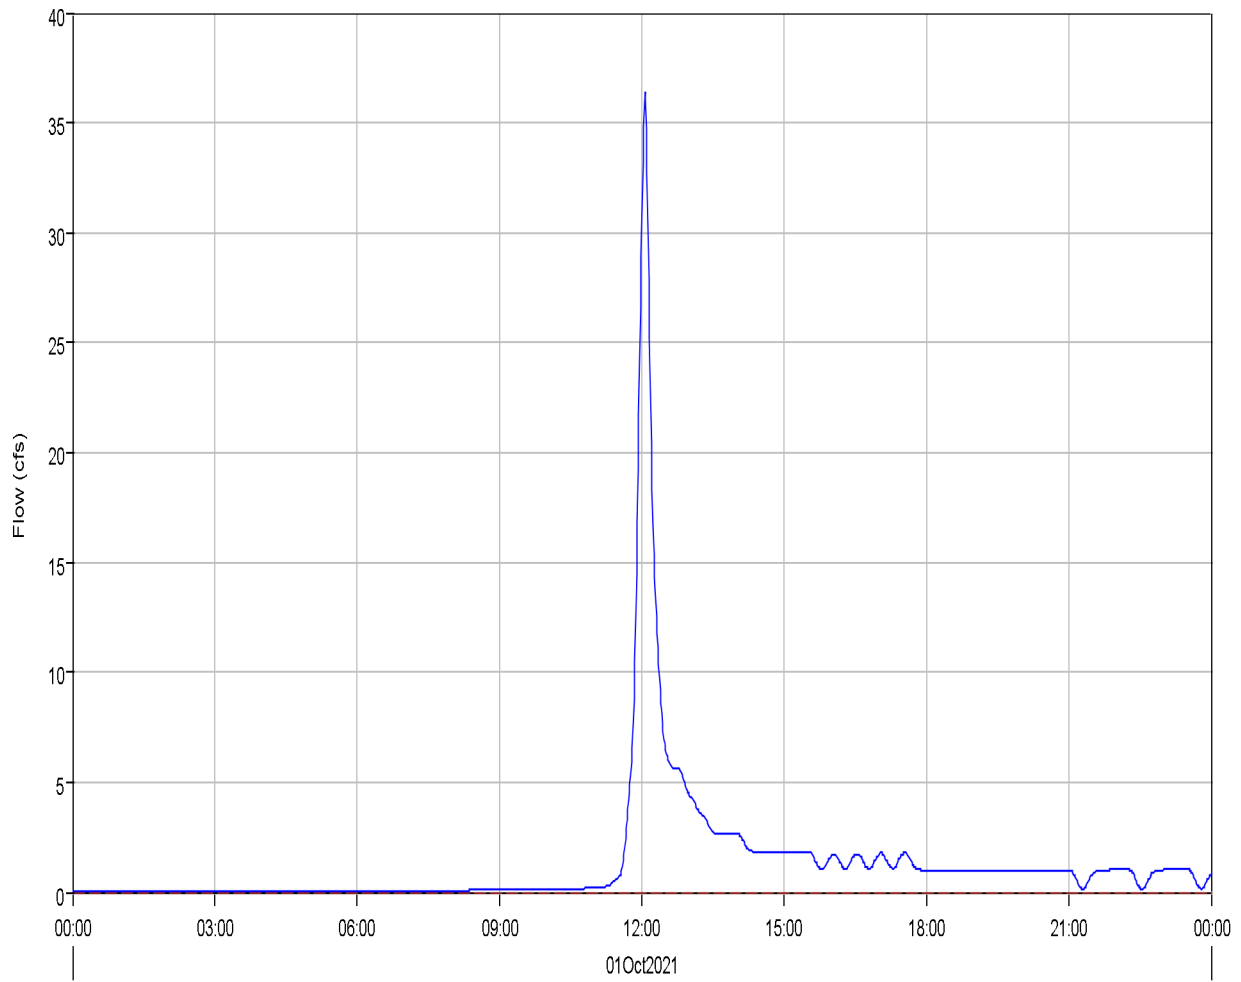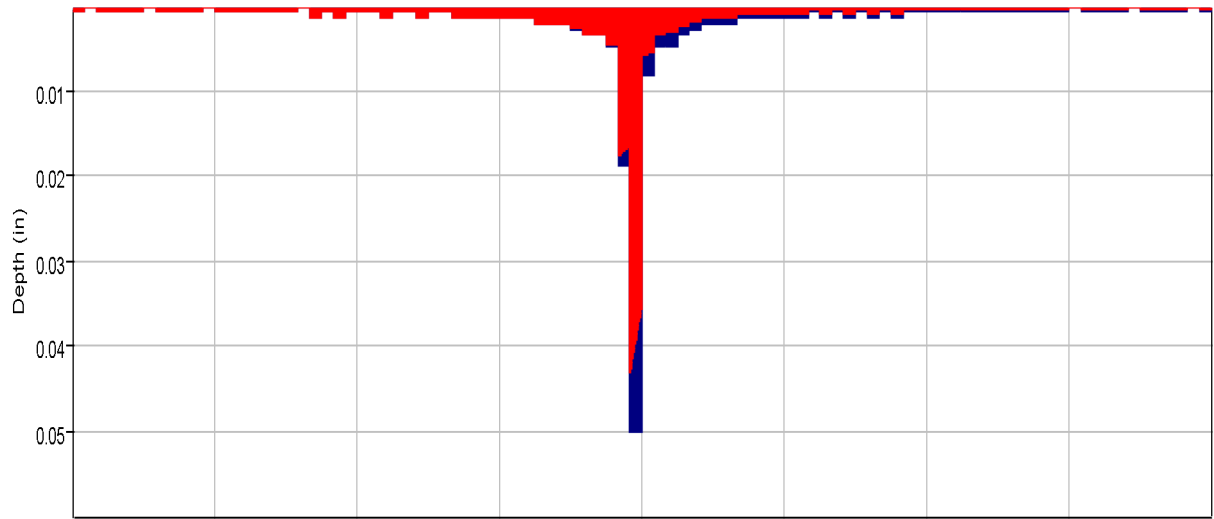



Run:EV 5-yr Ex. Type II Element:B3 Result:Precipitation Run:EV 5-yr Ex. Type II Element:B3 Result:Precipitation Loss Run:EV 5-yr Ex. Type II Element:B3 Result:Outflow
Run:EV 5-yr Ex. Type II Element:B3 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: B3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm
Volume Units: AC-FT

Computed Results

Peak Discharge :	36.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:04
Total Precipitation :	13.4 (AC-FT)	Total Direct Runoff :	2.7 (AC-FT)
Total Loss :	10.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.7 (AC-FT)	Discharge :	2.7 (AC-FT)

Subbasin "B4" Results for Run "EV 5-yr Ex. Type II"

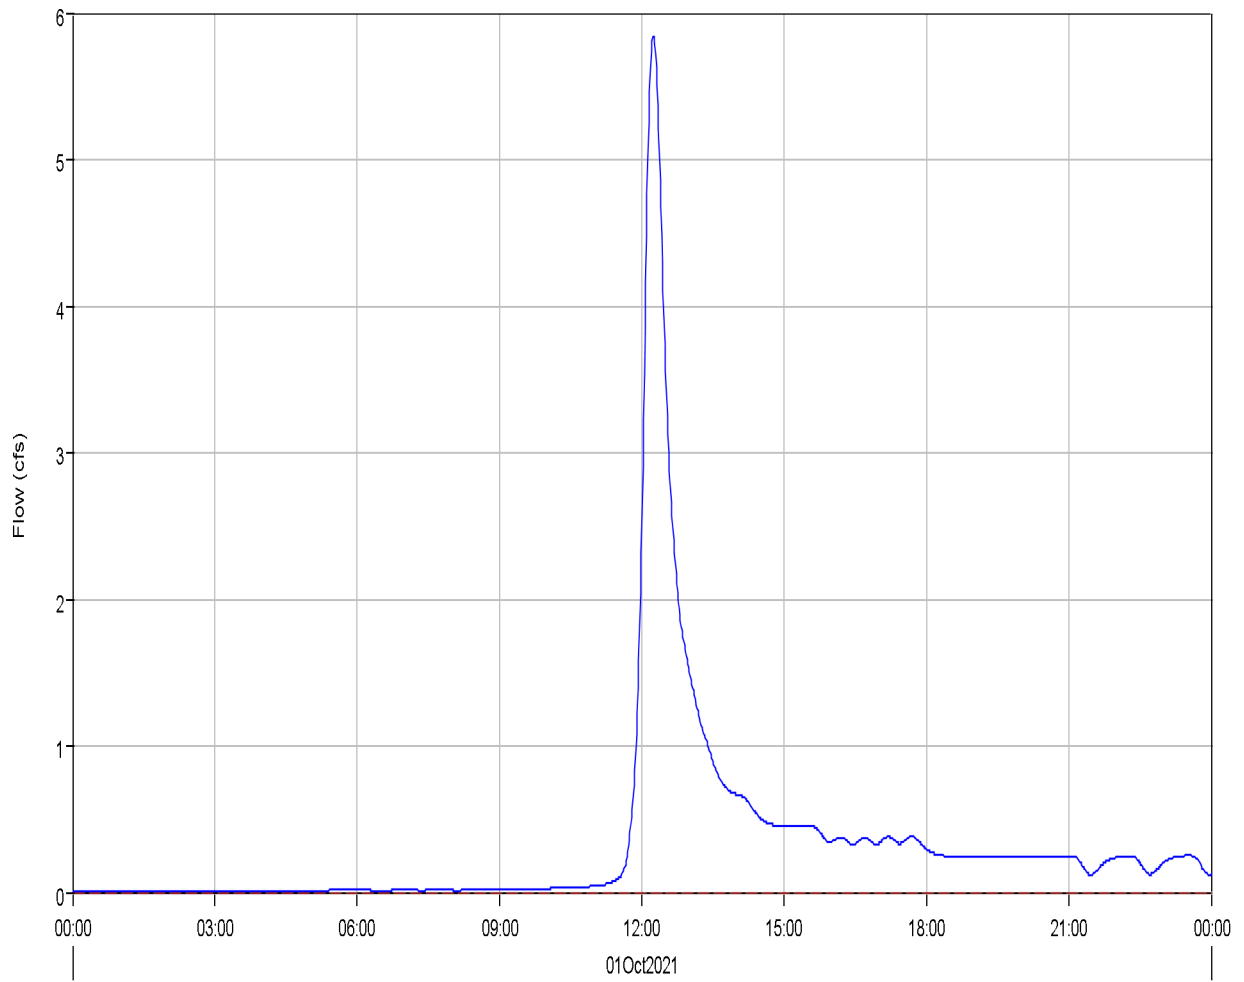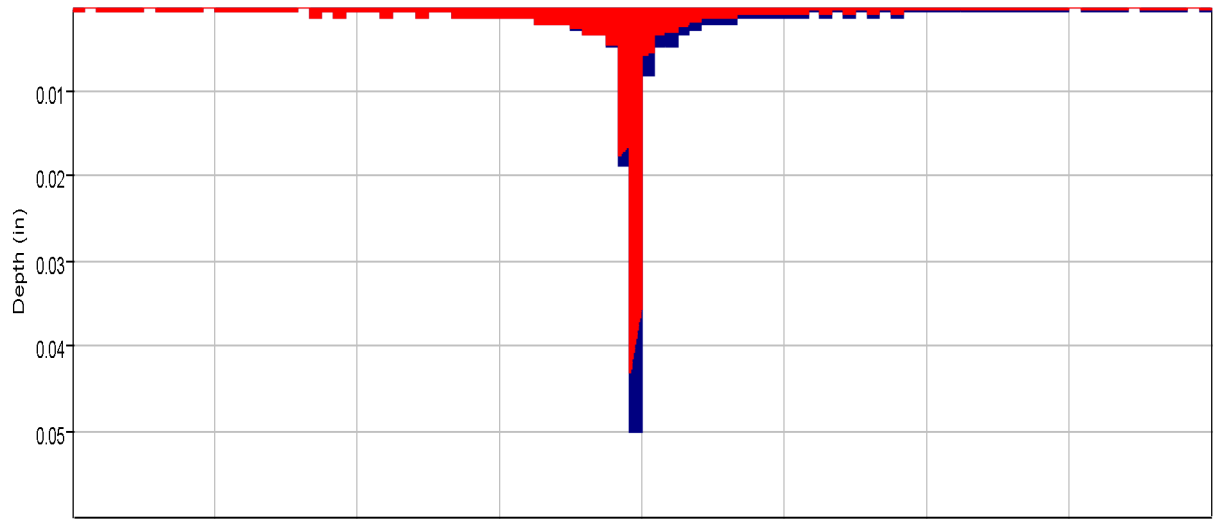

Run:EV 5-yr Ex. Type II Element:B4 Result:Precipitation Run:EV 5-yr Ex. Type II Element:B4 Result:Precipitation Loss Run:EV 5-yr Ex. Type II Element:B4 Result:Outflow
Run:EV 5-yr Ex. Type II Element:B4 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: B4


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	5.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:14
Total Precipitation :	3.3 (AC-FT)	Total Direct Runoff :	0.7 (AC-FT)
Total Loss :	2.6 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.7 (AC-FT)	Discharge :	0.7 (AC-FT)

Junction 'J1' Results for Run 'EV 5-yr Ex. Type II'

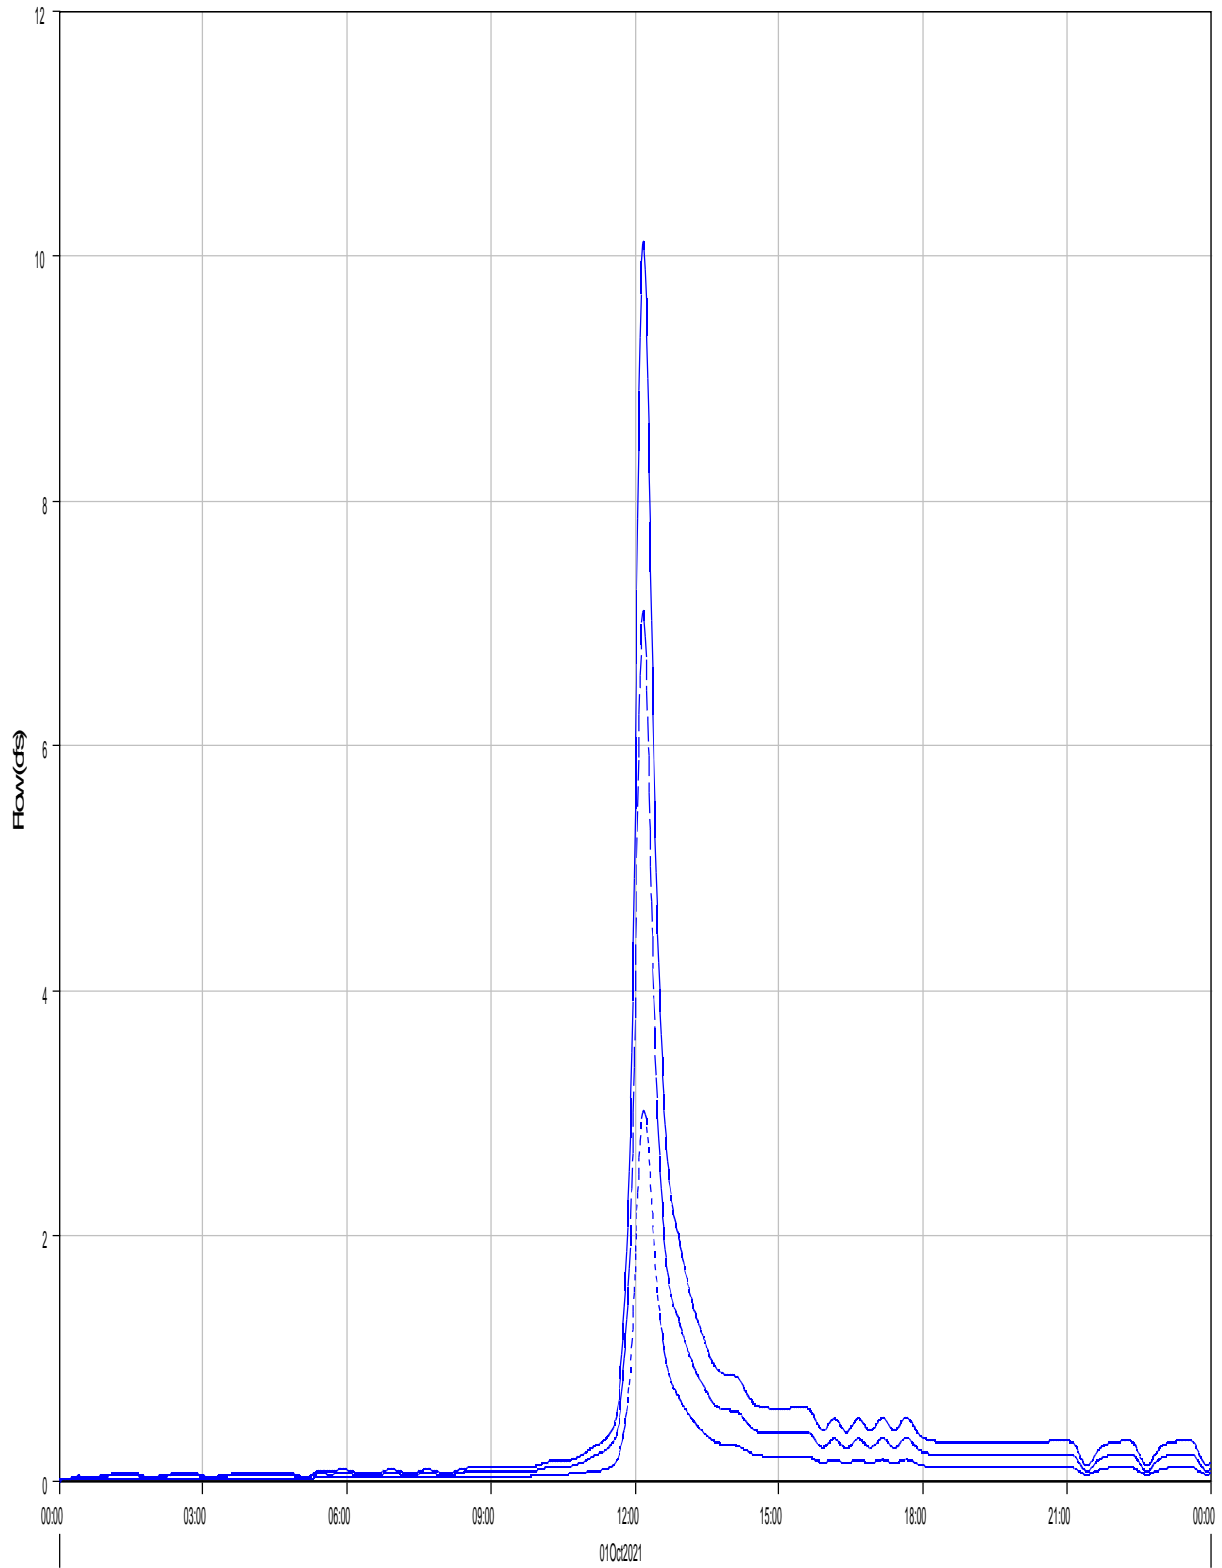

— Run: EV 5-yr Ex. Type II Element: J1 Result: Outflow

- - - Run: EV 5-yr Ex. Type II Element: R-B1 Result: Outflow

... Run: EV 5-yr Ex. Type II Element: B1 Result: Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Junction: J1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 10.1 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:11
Total Outflow : 1.0 (AC-FT)

Junction 'J2' Results for Run 'EV 5-yr Ex. Type II'

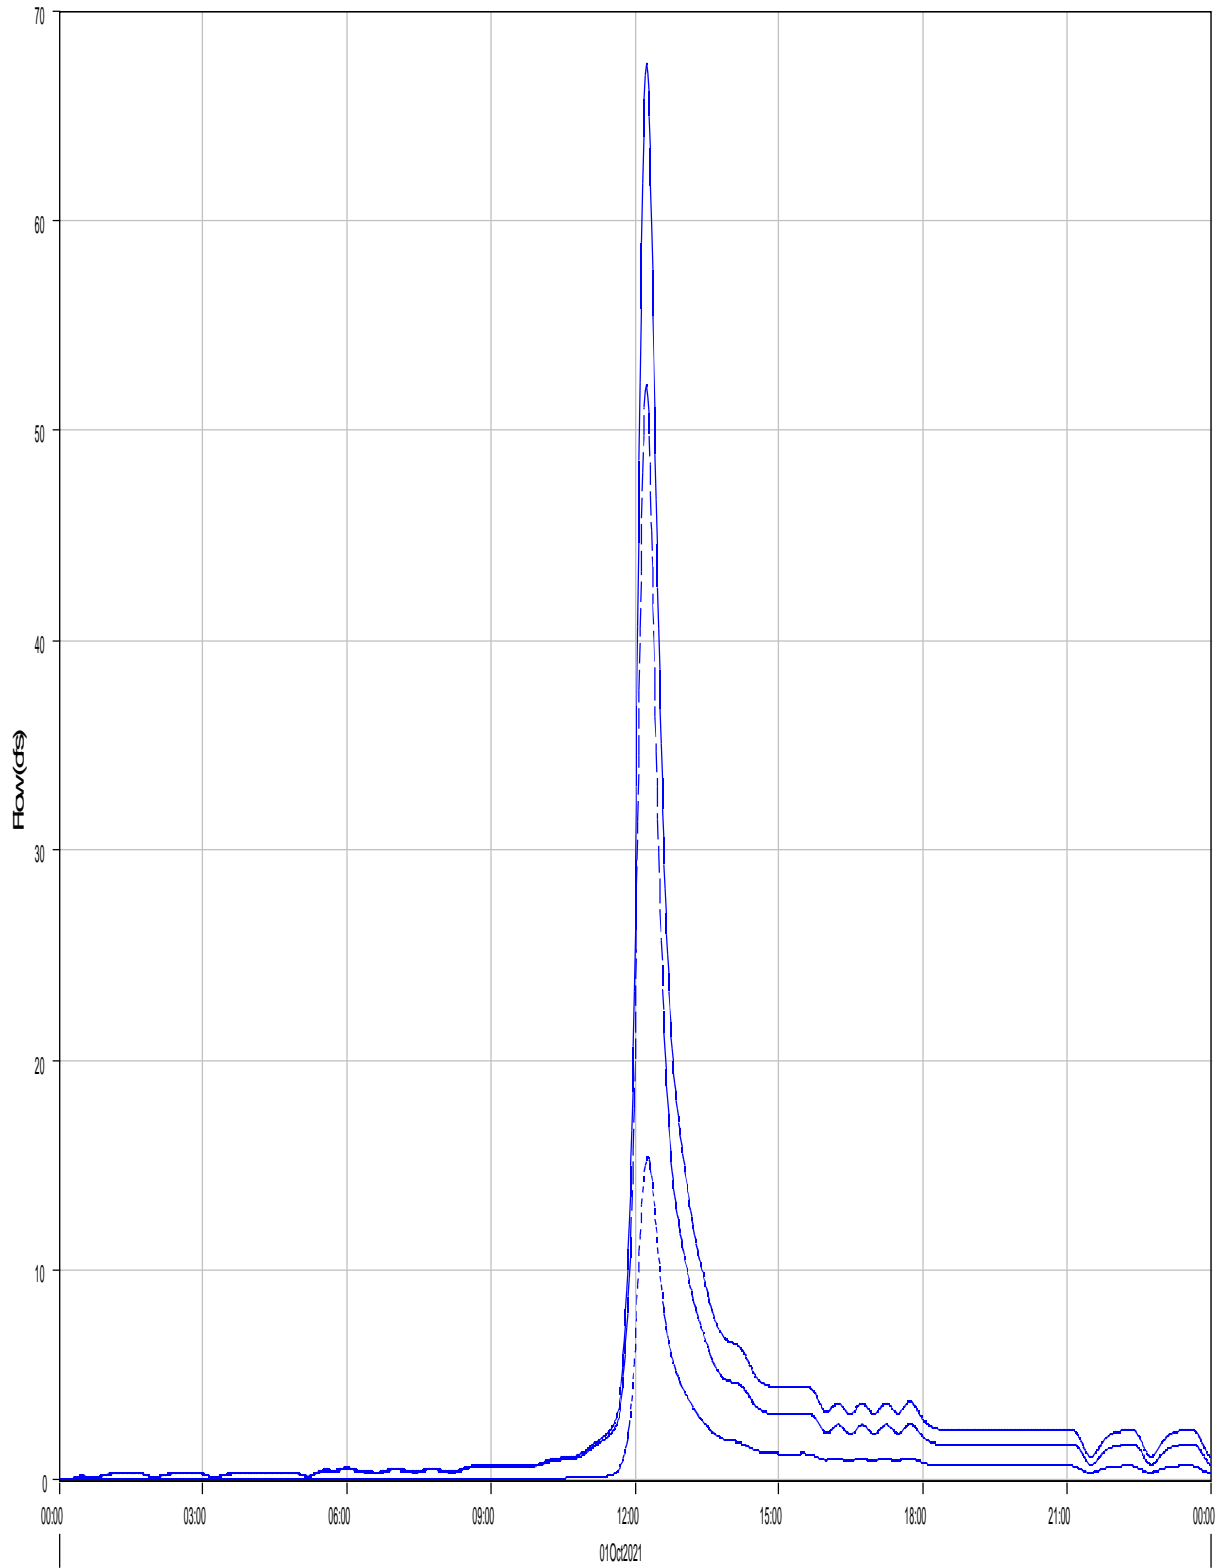

Run:EV 5-yr Ex. Type II Element:J2 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB4 Result:Outflow

Run:EV 5-yr Ex. Type II Element:B2 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Junction: J2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 67.5 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:15
Total Outflow : 7.3 (AC-FT)

Junction 'J3' Results for Run 'EV 5-yr Ex. Type II'

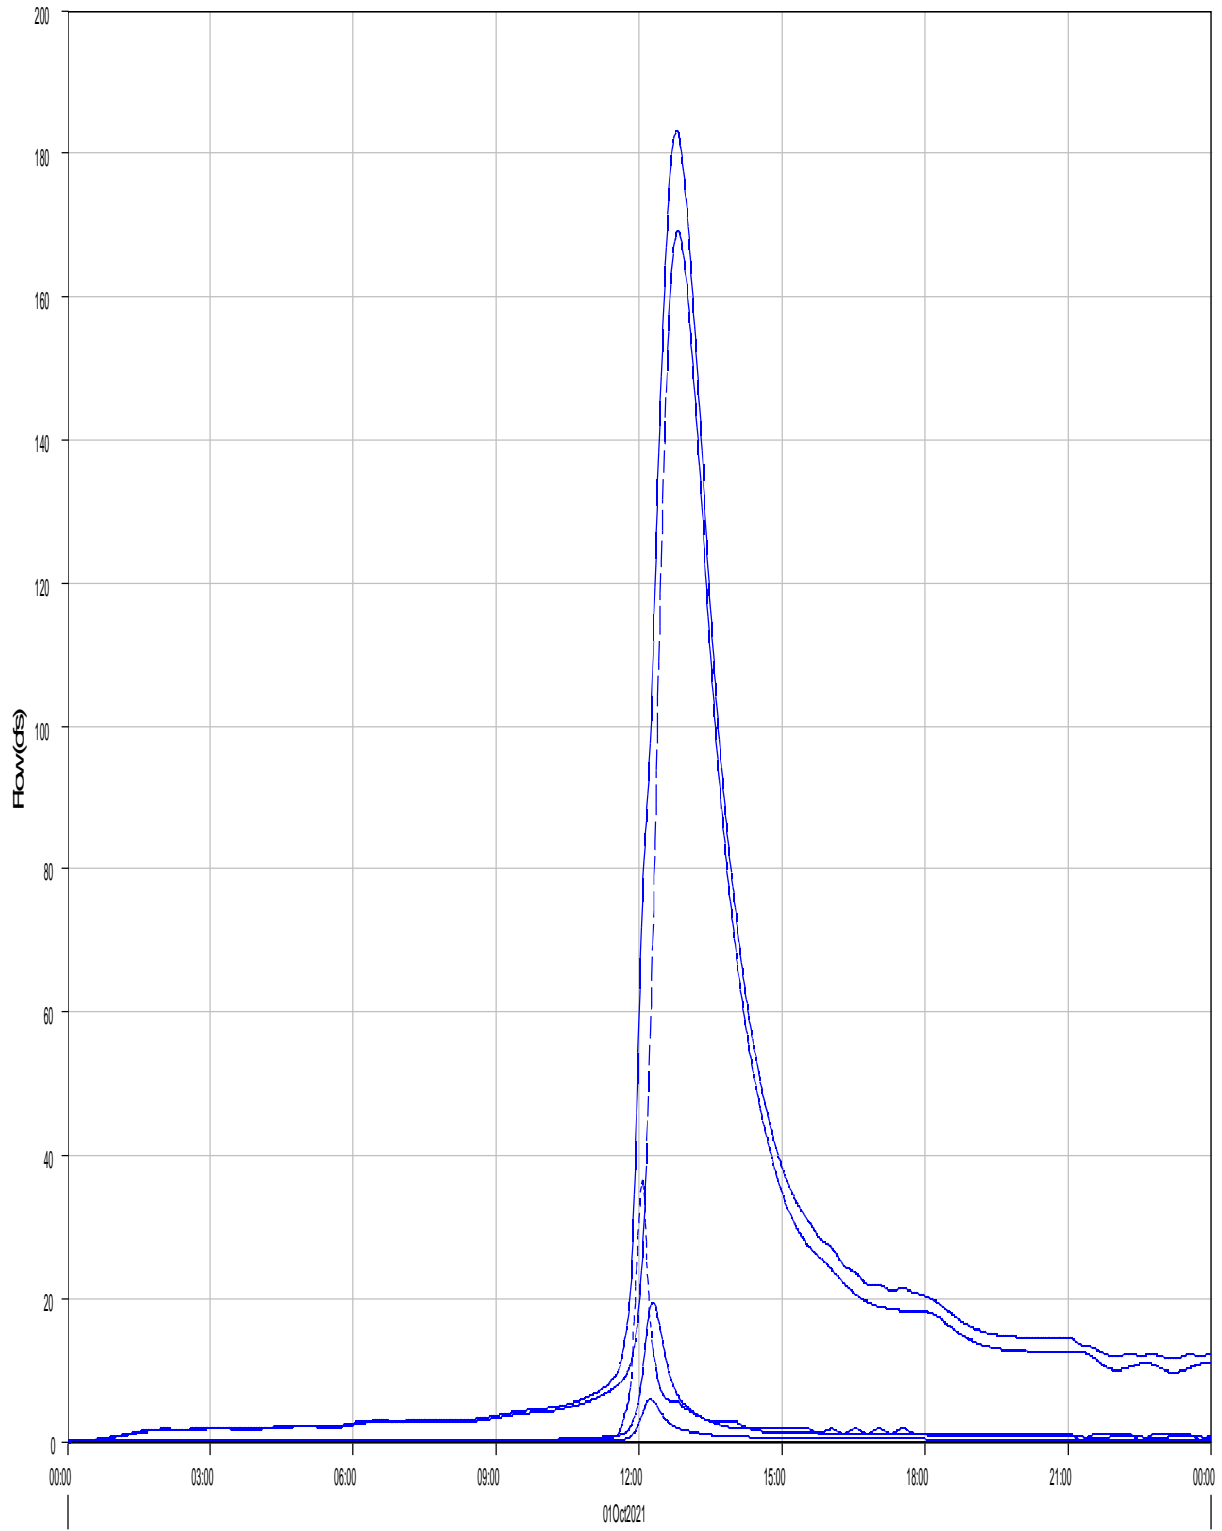

Run:EV 5-yr Ex. Type II Element:J3 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB7 Result:Outflow

Run:EV 5-yr Ex. Type II Element:B3 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB8 Result:Outflow

Run:EV 5-yr Ex. Type II Element:B4 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Junction: J3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 183.1 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:47
Total Outflow : 42.8 (AC-FT)

Junction 'J4' Results for Run 'EV 5-yr Ex. Type II'

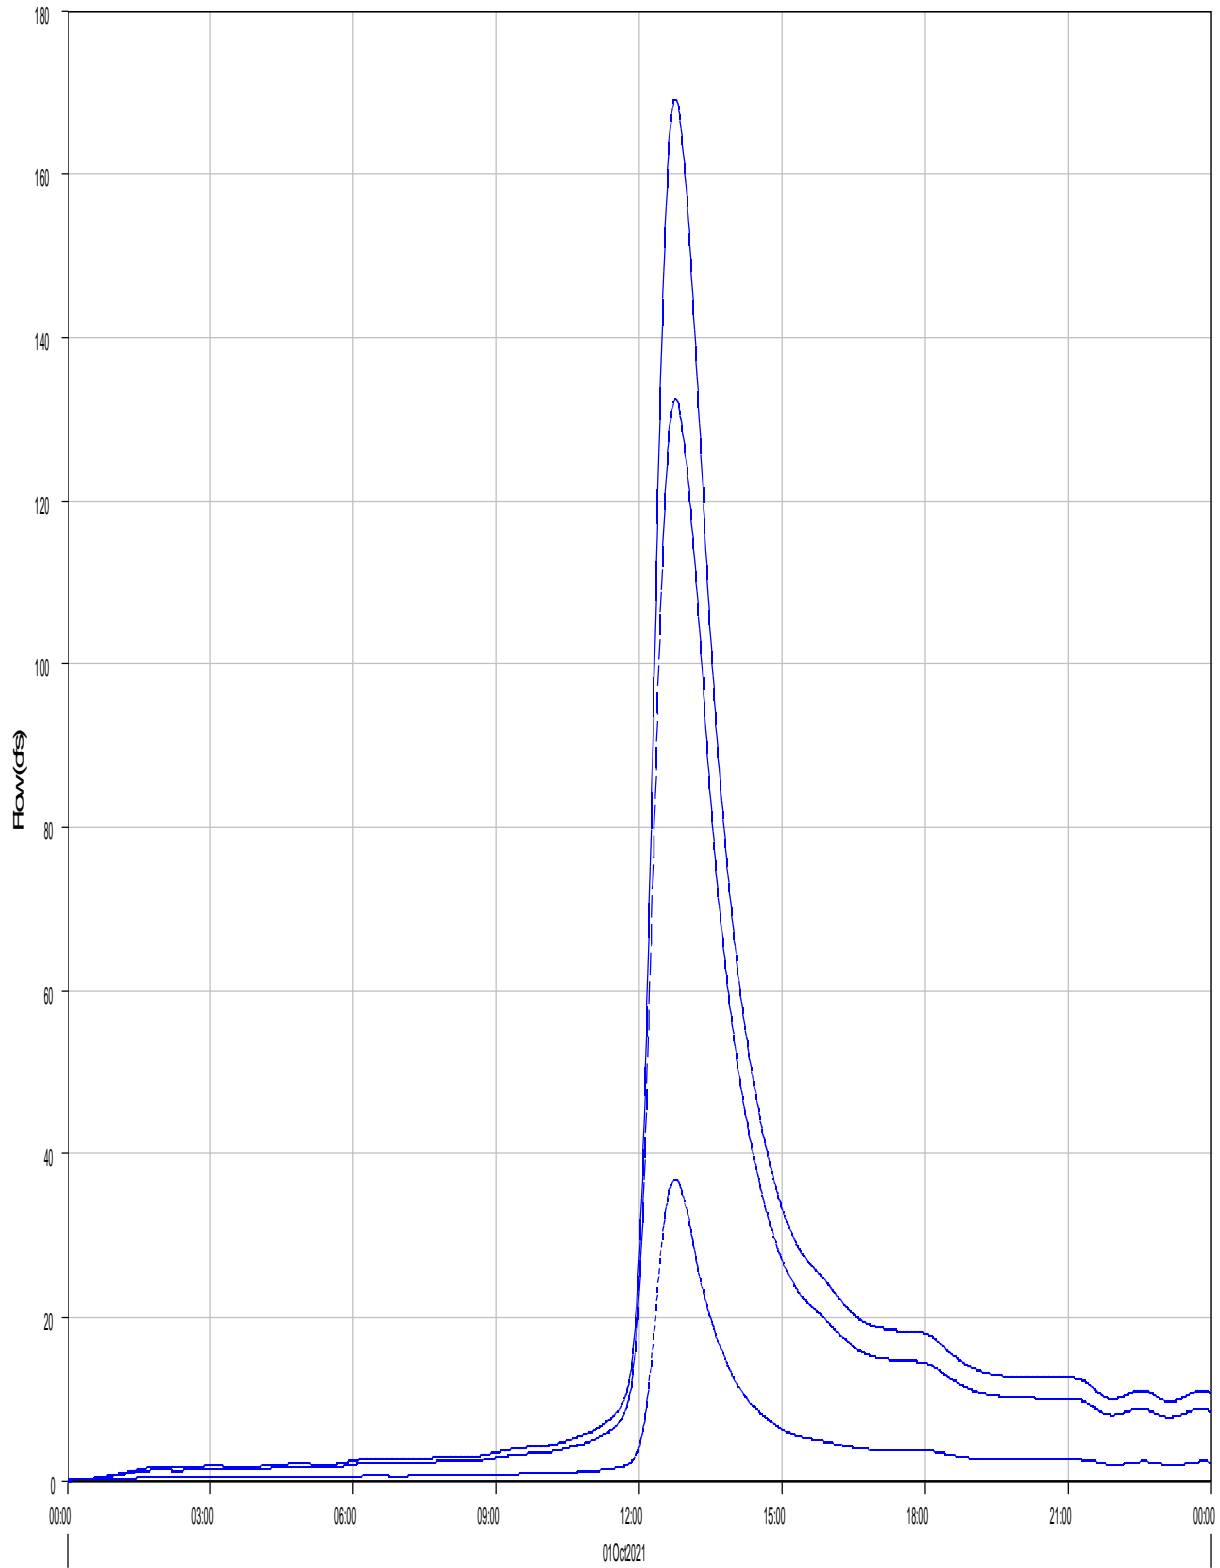

Run:EV 5-yr Ex. Type II Element:J4 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB6 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB5 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Junction: J4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 169.2 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:46
Total Outflow : 37.4 (AC-FT)

Junction 'J-OB6' Results for Run 'EV 5-yr Ex. Type II'

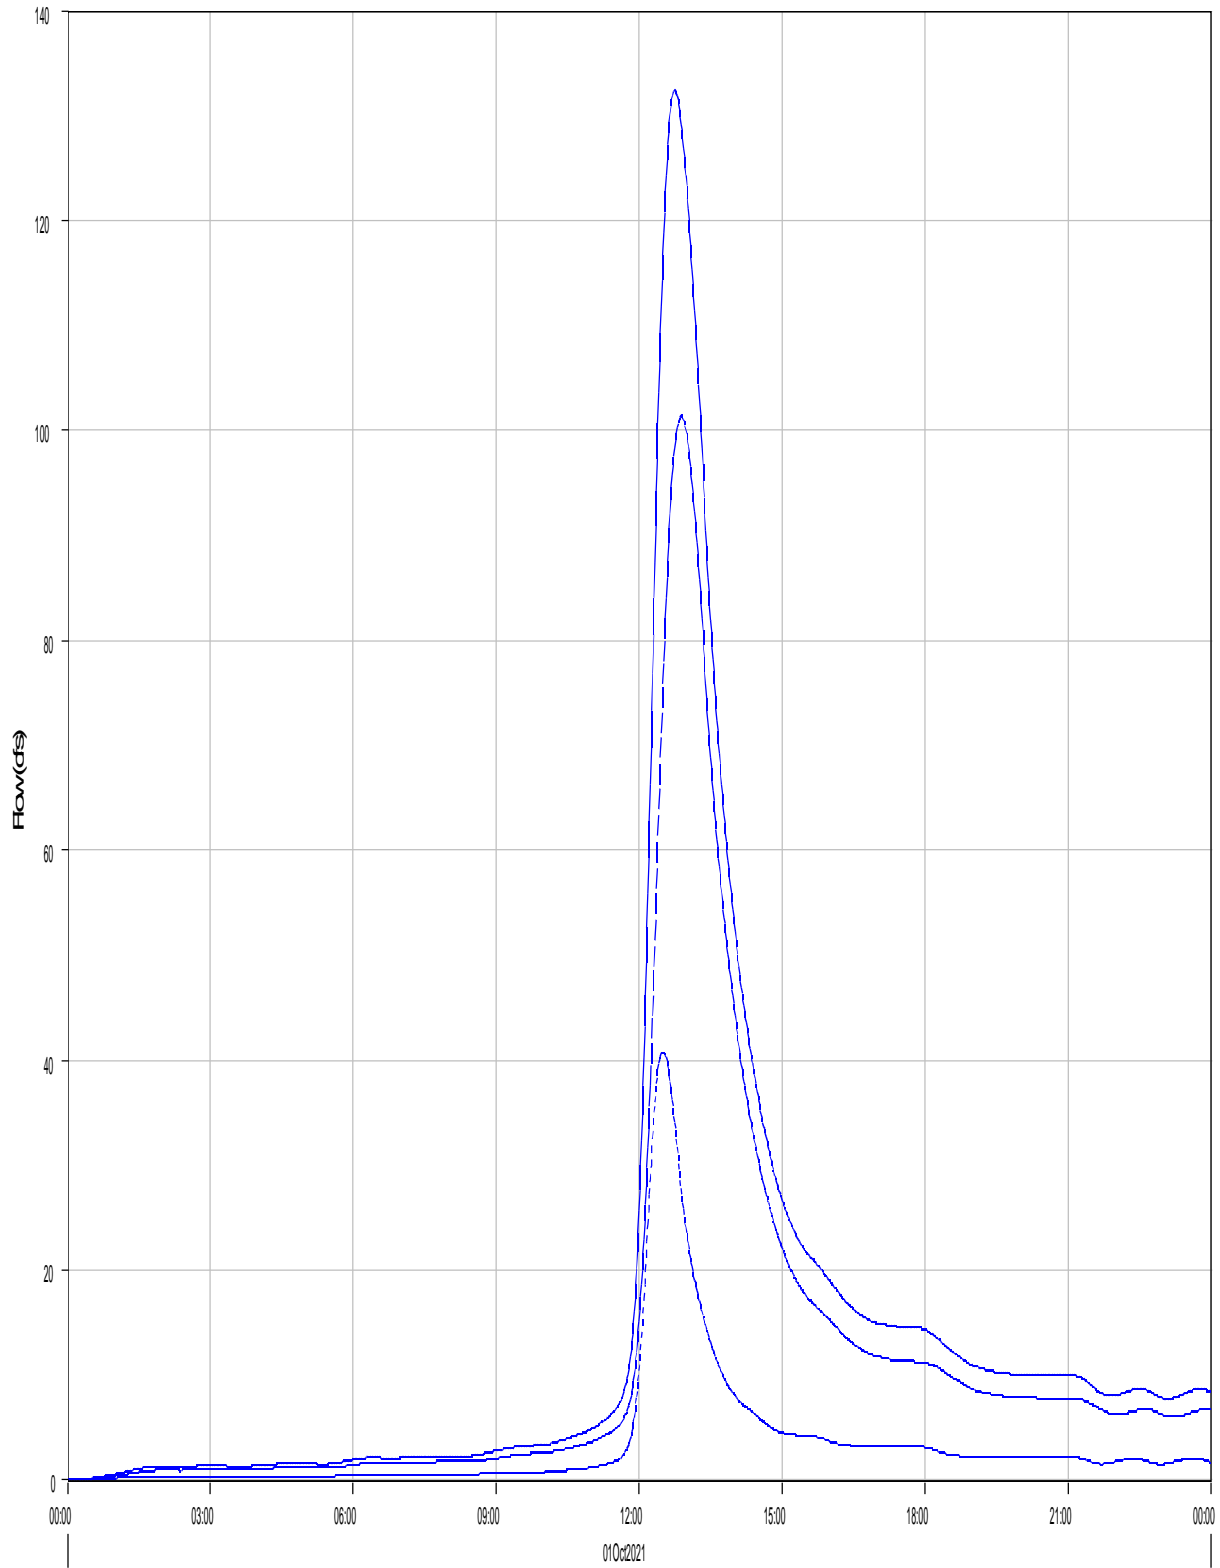

Run:EV 5-yr Ex. Type II Element:OB6 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB7 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB6 Result:Outflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Junction: J-OB6



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 132.4 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:45
Total Outflow : 30.1 (AC-FT)

Subbasin "OB1" Results for Run "EV 5-yr Ex. Type II"

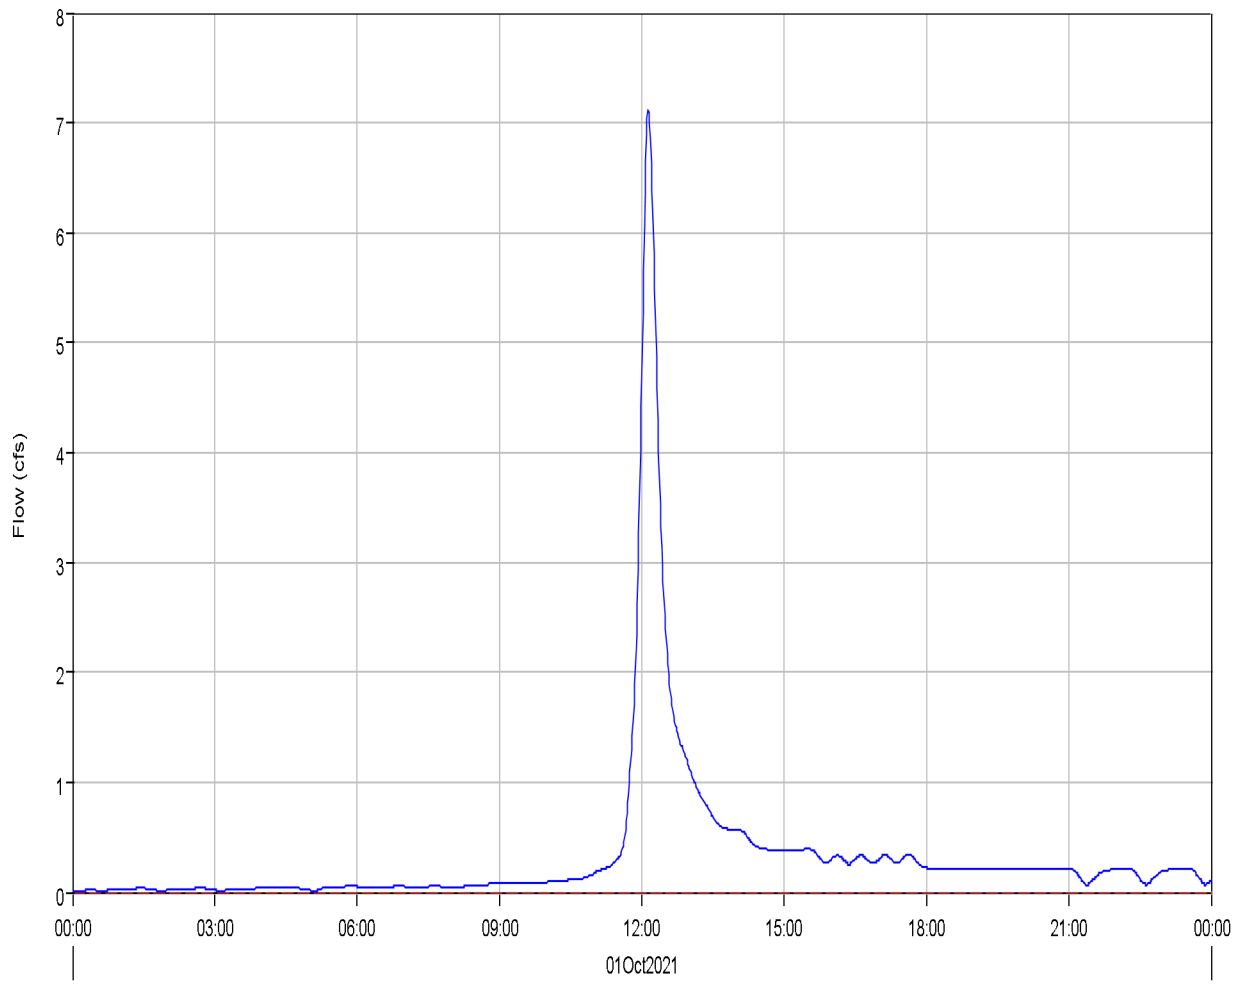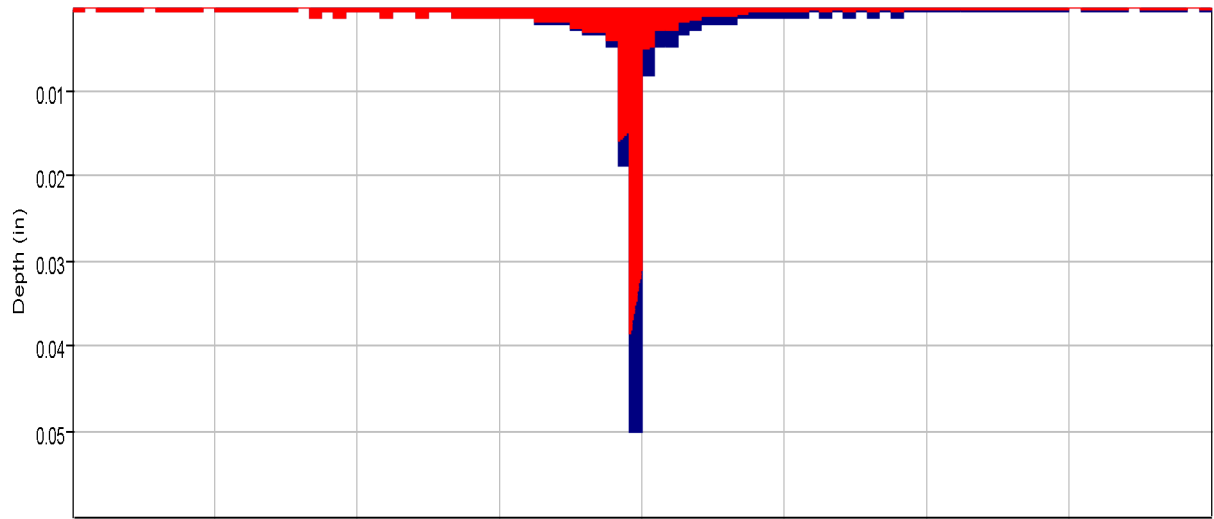

Run:EV 5-yr Ex. Type II Element:OB1 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB1 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB1 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB1 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB1



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	7.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	2.3 (AC-FT)	Total Direct Runoff :	0.7 (AC-FT)
Total Loss :	1.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.7 (AC-FT)	Discharge :	0.7 (AC-FT)

Subbasin "OB2" Results for Run "EV 5-yr Ex. Type II"

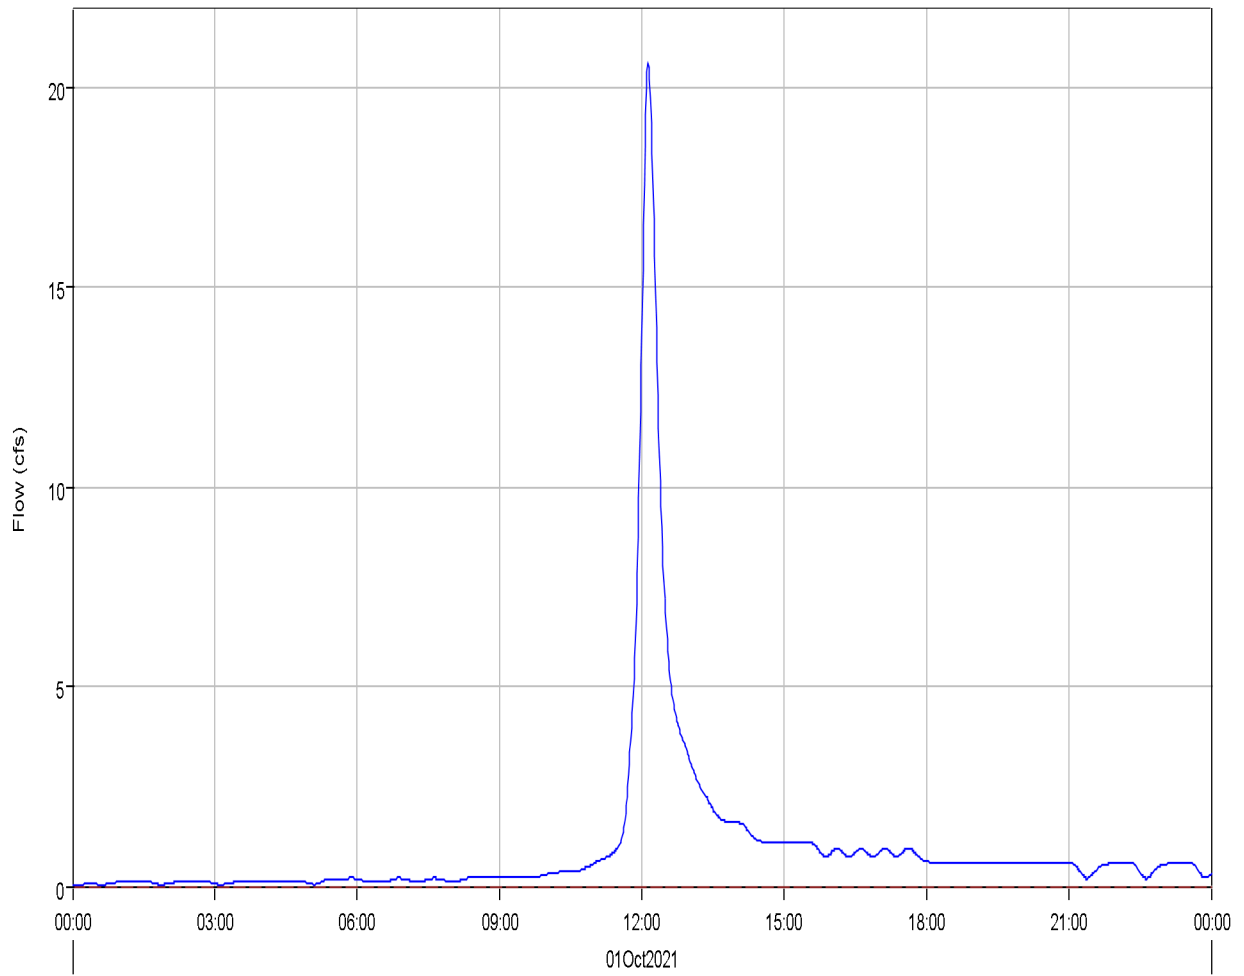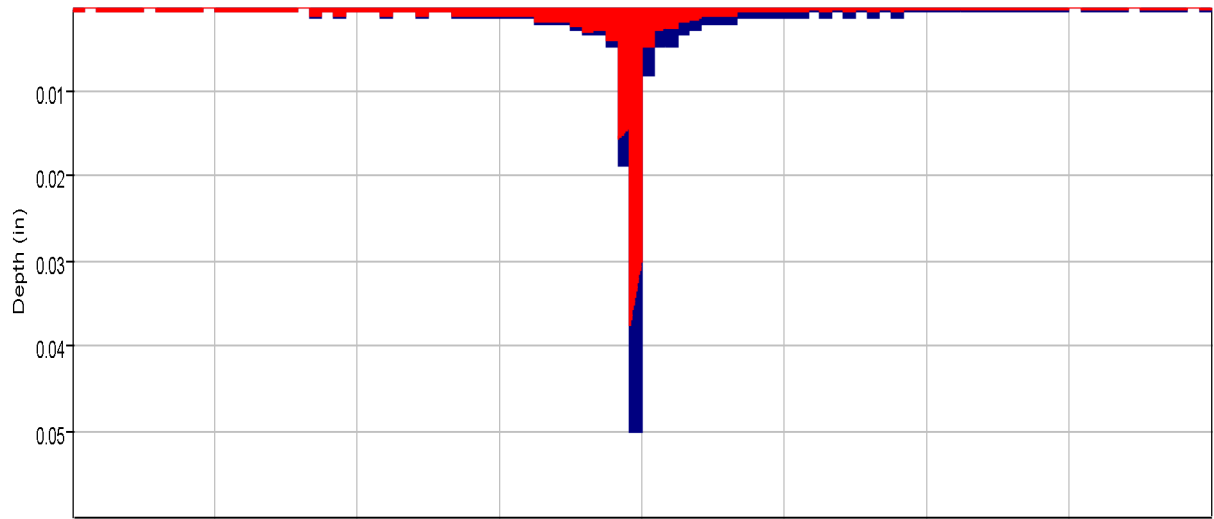

Run:EV 5-yr Ex. Type II Element:OB2 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB2 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB2 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB2 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB2



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	20.6 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	6.3 (AC-FT)	Total Direct Runoff :	1.9 (AC-FT)
Total Loss :	4.4 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.9 (AC-FT)	Discharge :	1.9 (AC-FT)

Subbasin "OB3" Results for Run "EV 5-yr Ex. Type II"

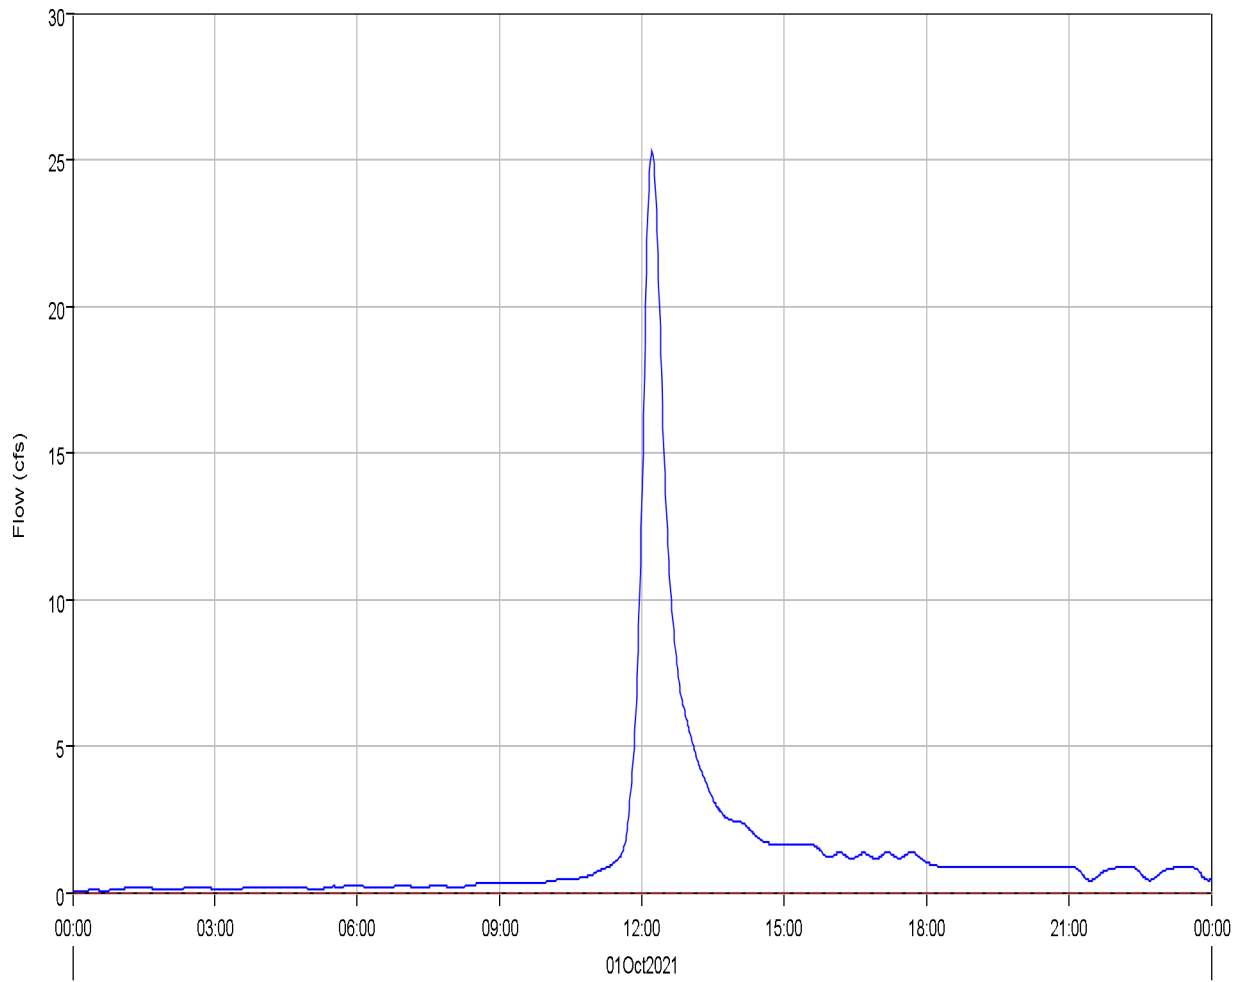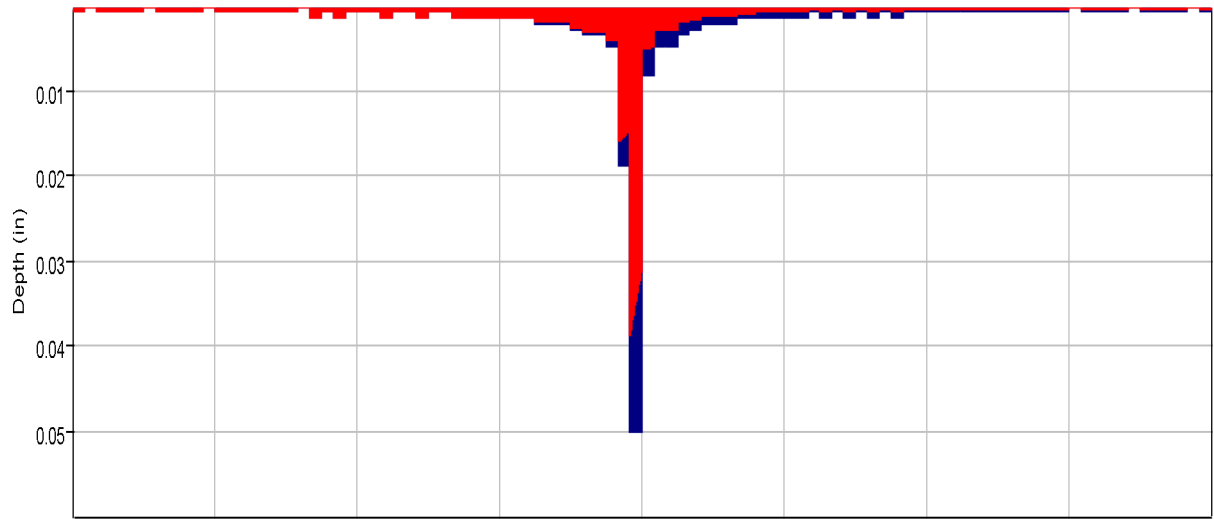

Run:EV 5-yr Ex. Type II Element:OB3 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB3 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB3 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB3 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB3



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	25.3 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	9.8 (AC-FT)	Total Direct Runoff :	2.8 (AC-FT)
Total Loss :	7.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.8 (AC-FT)	Discharge :	2.8 (AC-FT)

Subbasin "OB4" Results for Run "EV 5-yr Ex. Type II"

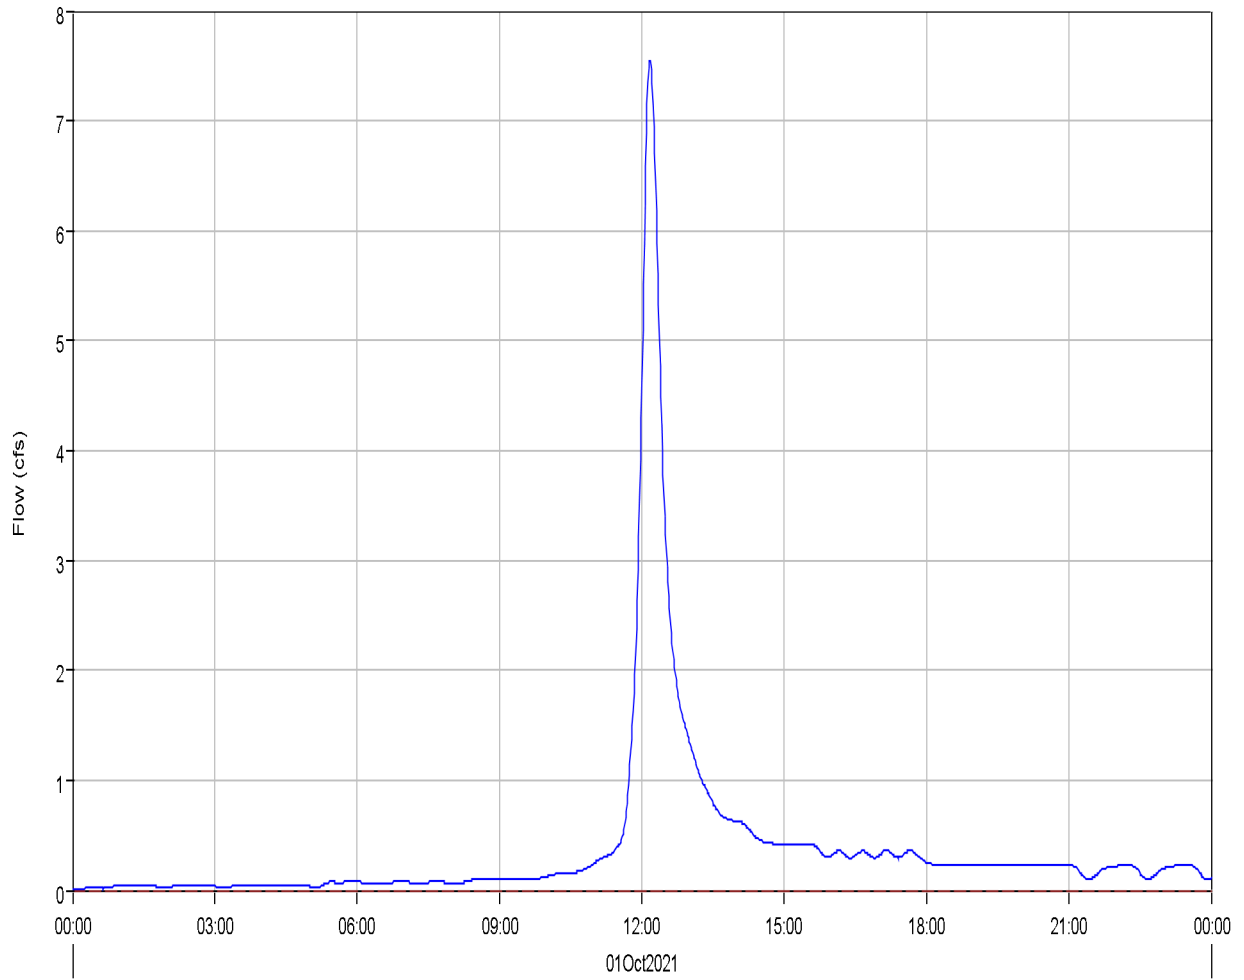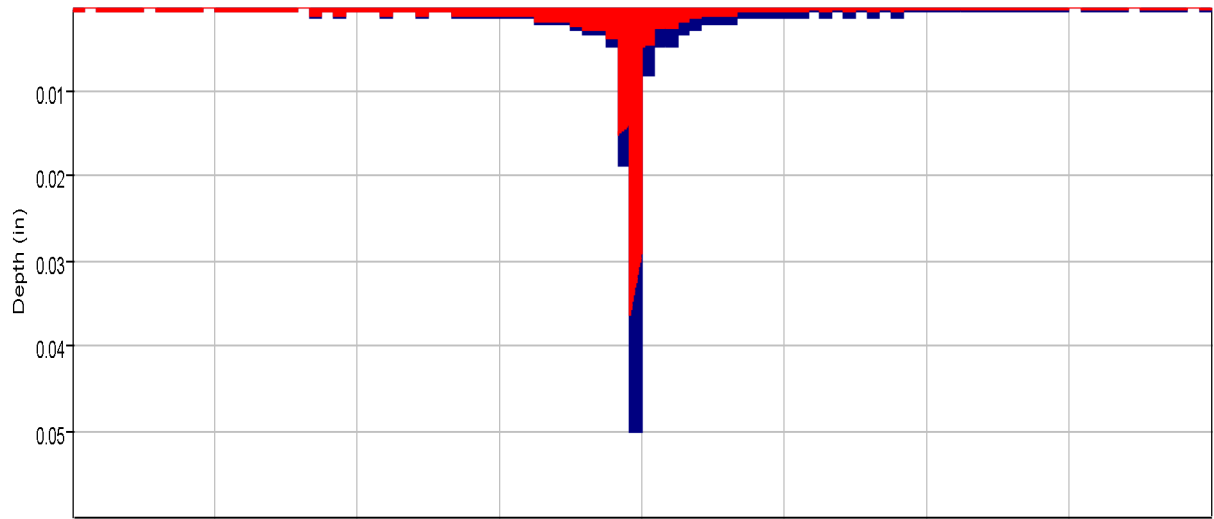

Run:EV 5-yr Ex. Type II Element:OB4 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB4 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB4 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB4 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB4



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	7.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	2.4 (AC-FT)	Total Direct Runoff :	0.8 (AC-FT)
Total Loss :	1.6 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.8 (AC-FT)	Discharge :	0.8 (AC-FT)

Subbasin "OB5" Results for Run "EV 5-yr Ex. Type II"

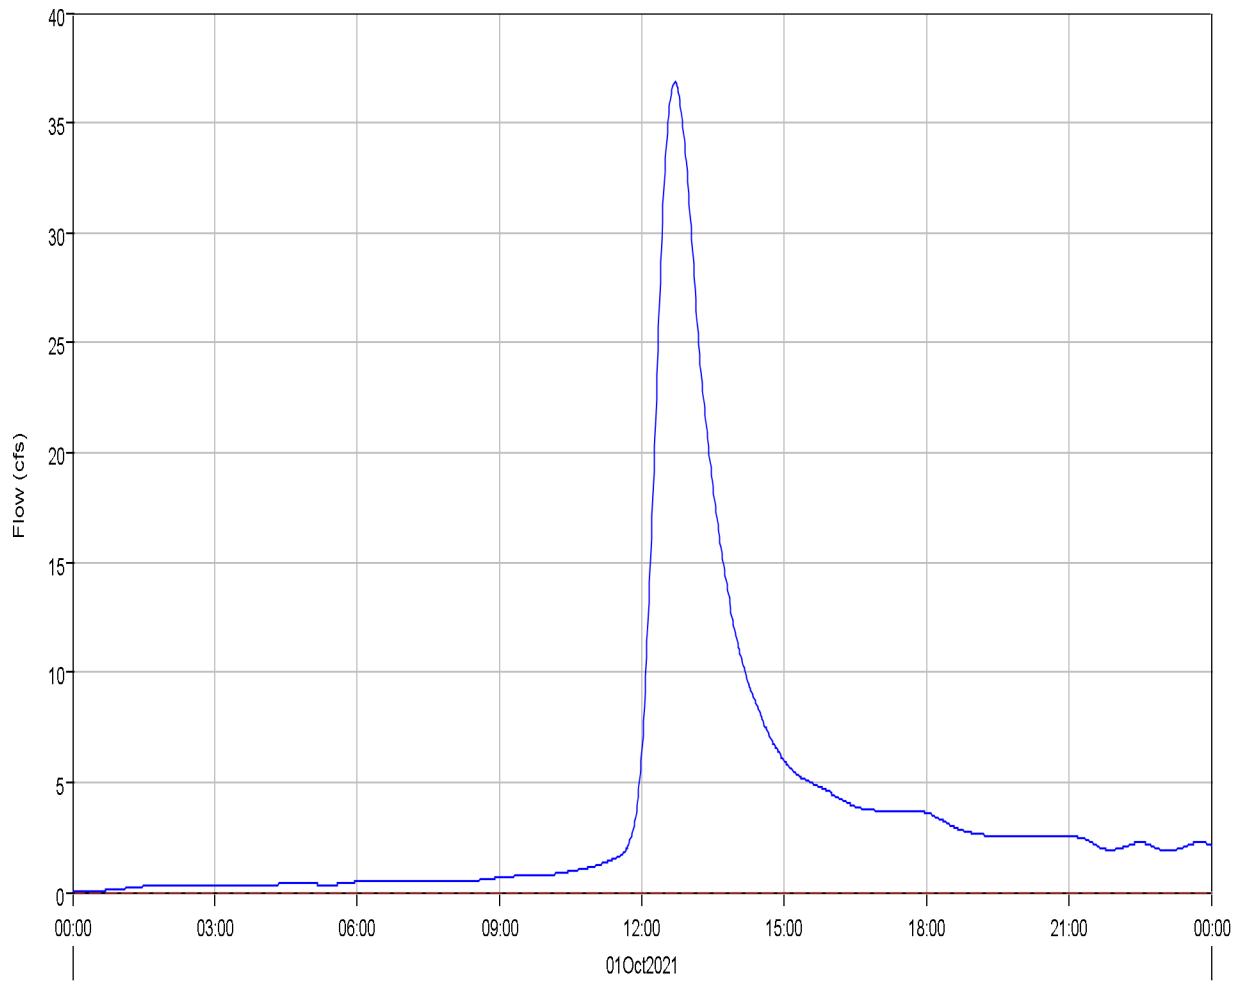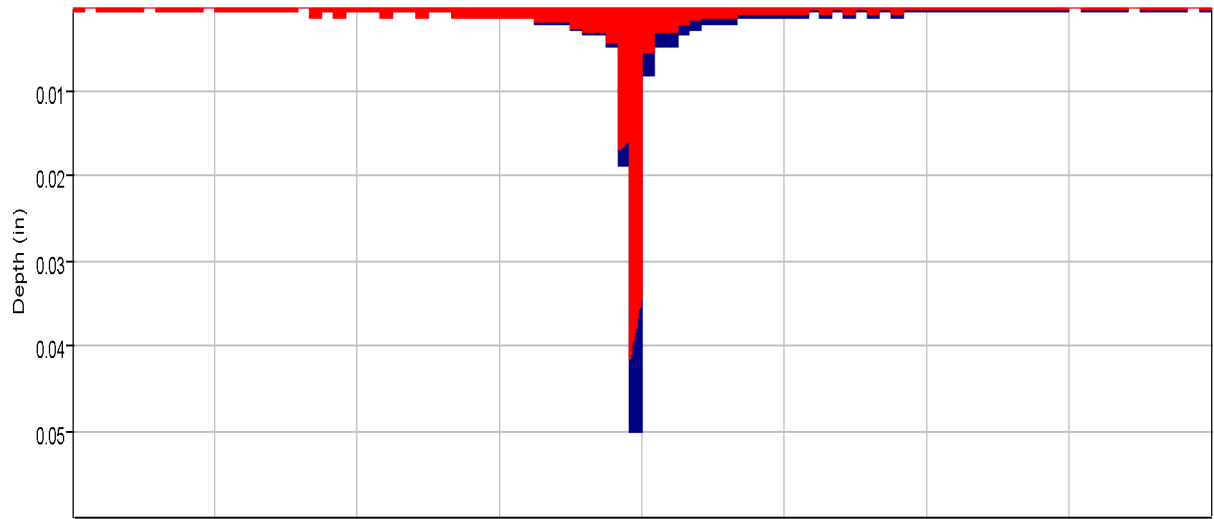

Run:EV 5-yr Ex. Type II Element:OB5 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB5 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB5 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB5 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB5



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	36.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:42
Total Precipitation :	32.4 (AC-FT)	Total Direct Runoff :	7.4 (AC-FT)
Total Loss :	24.8 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	7.6 (AC-FT)	Discharge :	7.4 (AC-FT)

Subbasin "OB6" Results for Run "EV 5-yr Ex. Type II"

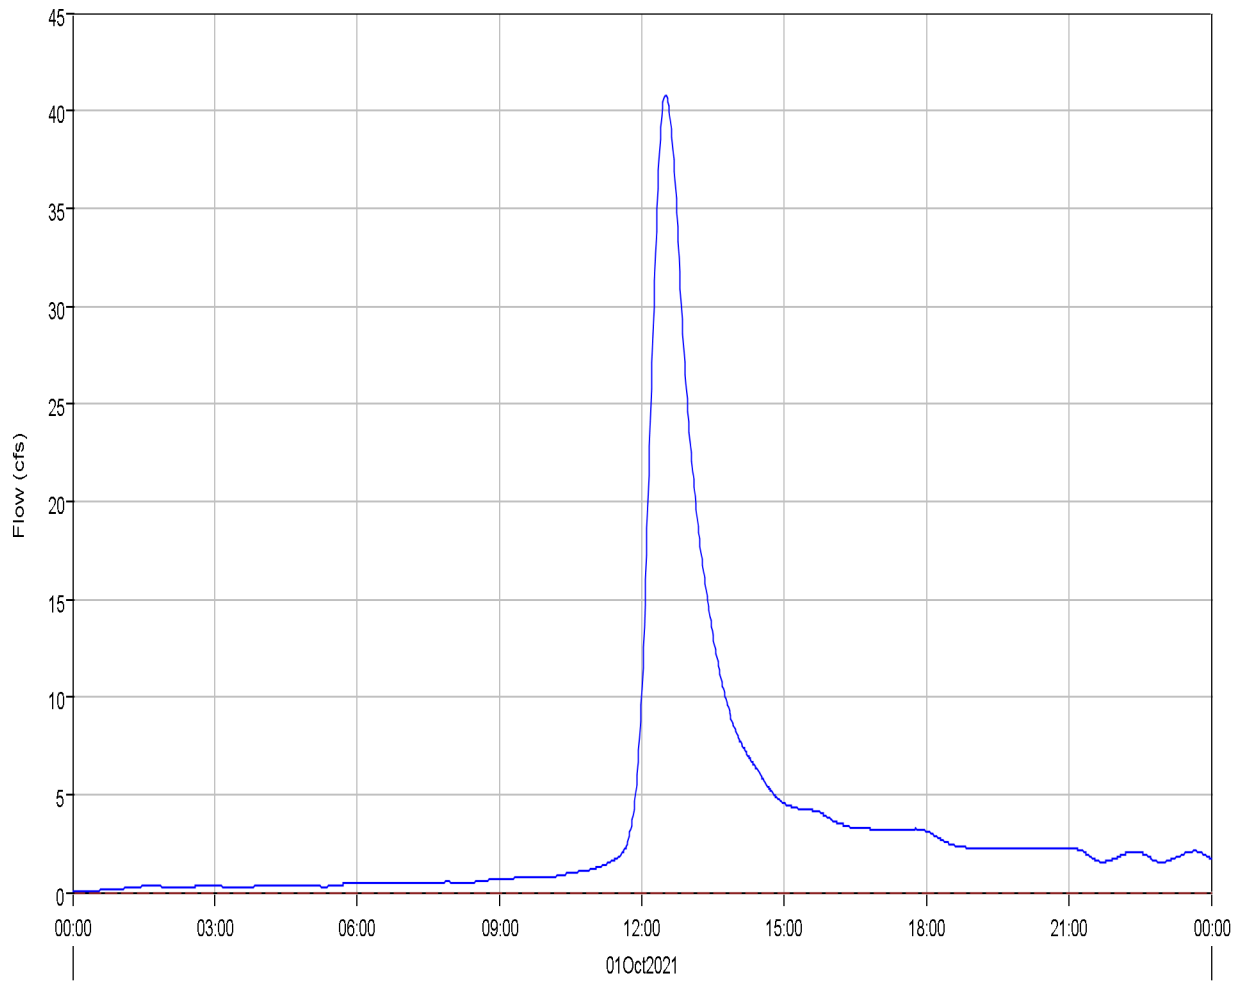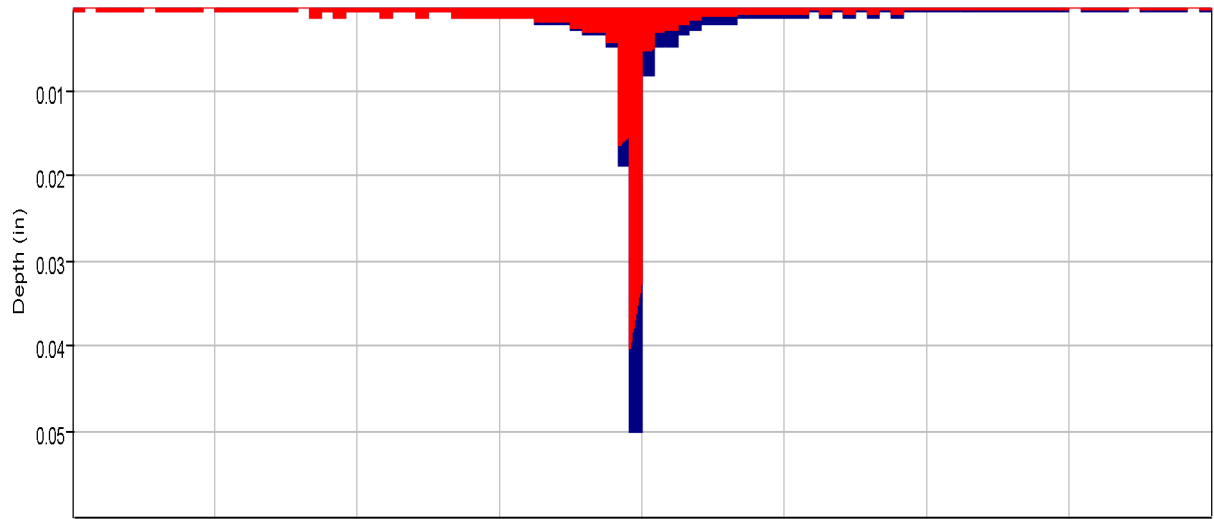

Run:EV 5-yr Ex. Type II Element:OB6 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB6 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB6 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB6 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB6



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	40.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:30
Total Precipitation :	26.6 (AC-FT)	Total Direct Runoff :	6.8 (AC-FT)
Total Loss :	19.8 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	6.9 (AC-FT)	Discharge :	6.8 (AC-FT)

Subbasin "OB7" Results for Run "EV 5-yr Ex. Type II"

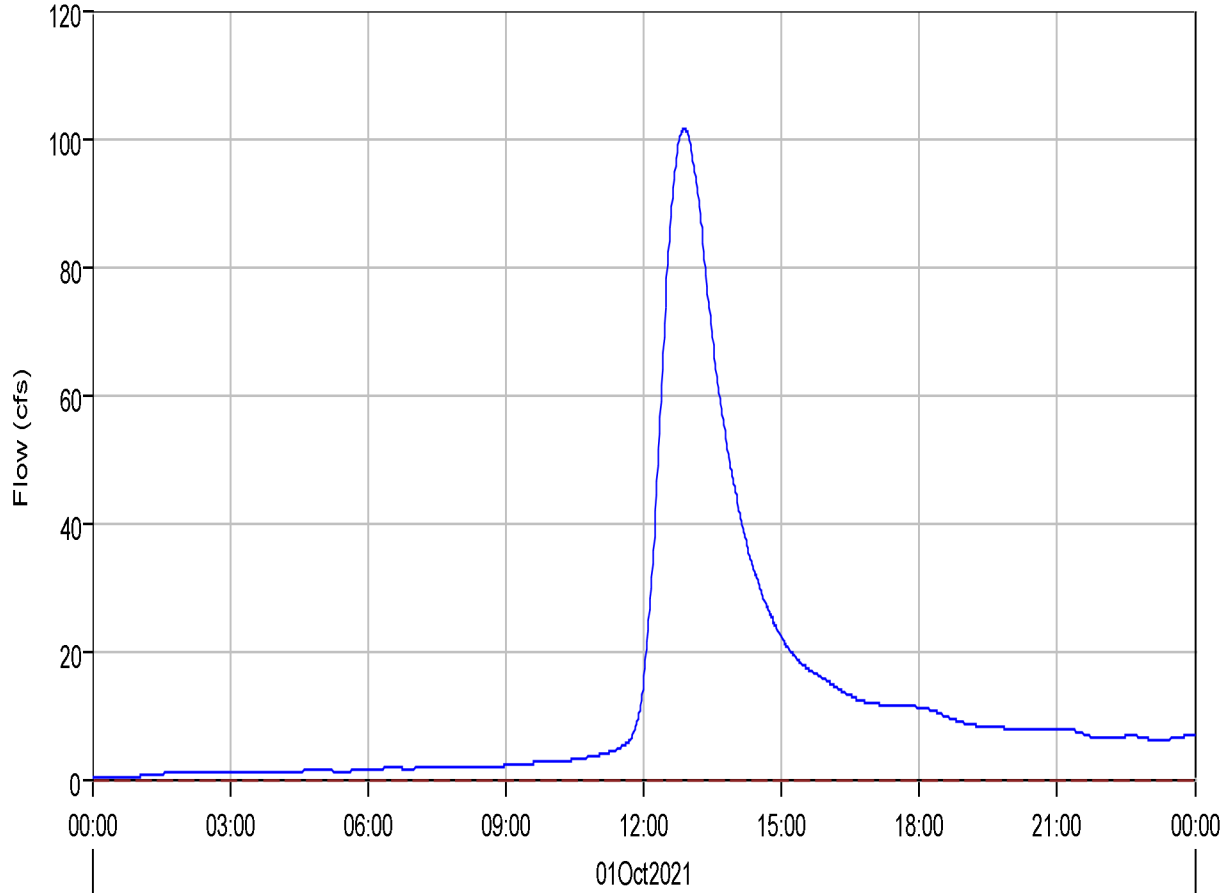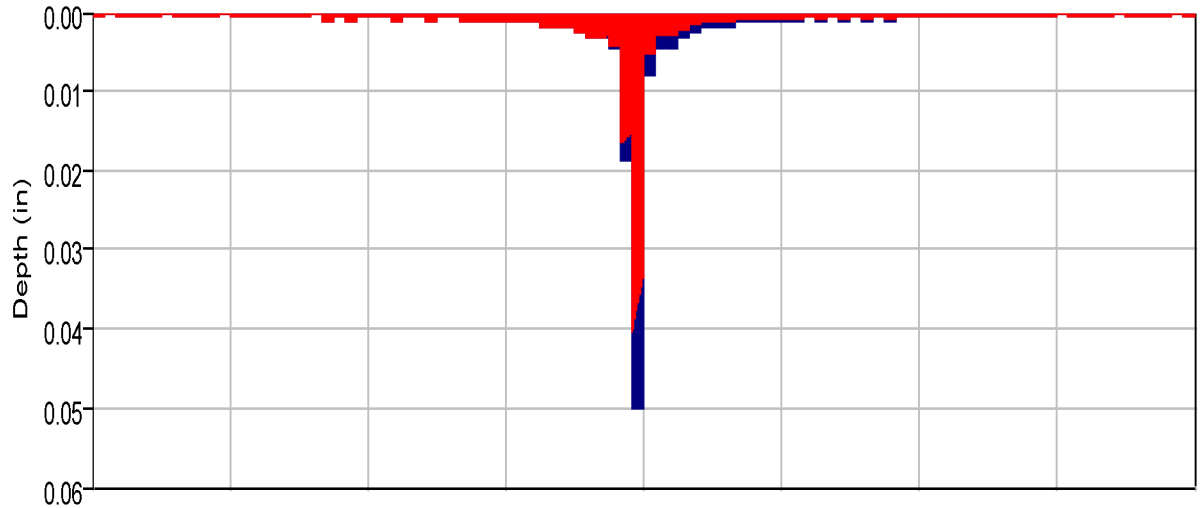

- Run:EV 5-yr Ex. Type II Element:OB7 Result:Precipitation
- Run:EV 5-yr Ex. Type II Element:OB7 Result:Precipitation Loss
- Run:EV 5-yr Ex. Type II Element:OB7 Result:Outflow
- Run:EV 5-yr Ex. Type II Element:OB7 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB7



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	101.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:53
Total Precipitation :	94.8 (AC-FT)	Total Direct Runoff :	23.3 (AC-FT)
Total Loss :	70.9 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	23.9 (AC-FT)	Discharge :	23.3 (AC-FT)

Subbasin "OB8" Results for Run "EV 5-yr Ex. Type II"

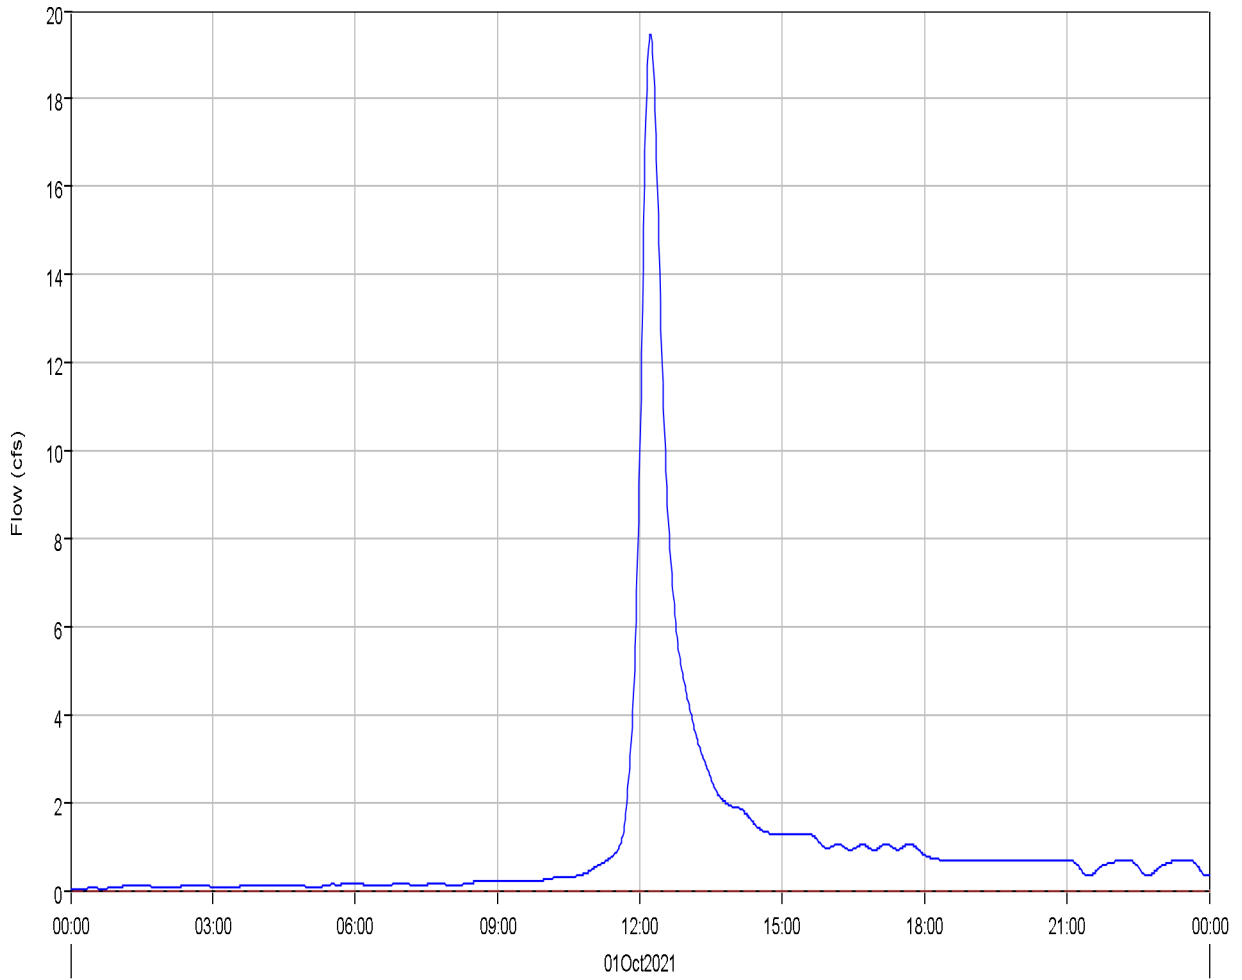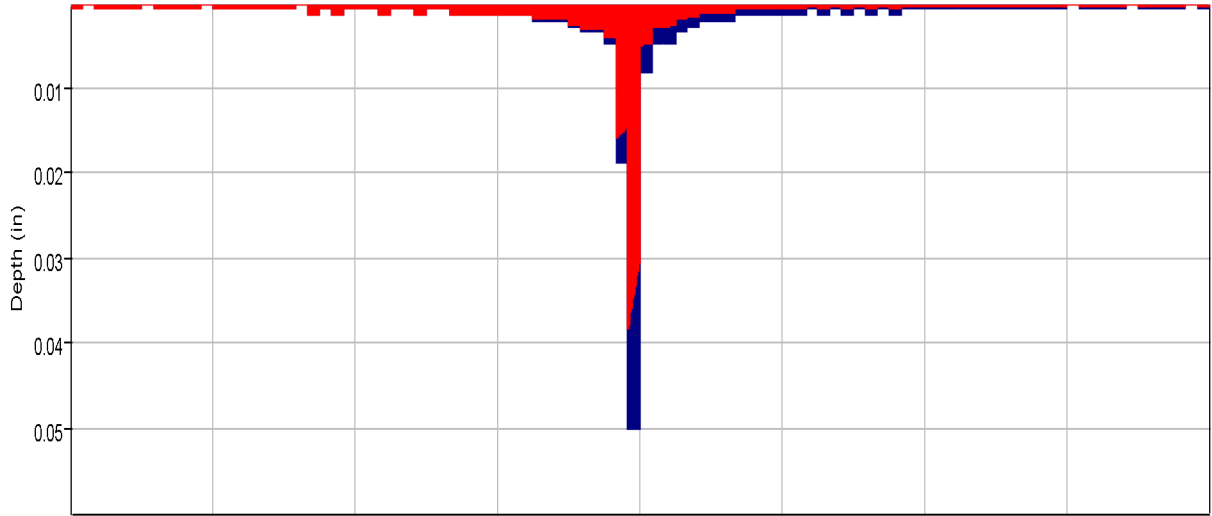

Run:EV 5-yr Ex. Type II Element:OB8 Result:Precipitation

Run:EV 5-yr Ex. Type II Element:OB8 Result:Precipitation Loss

Run:EV 5-yr Ex. Type II Element:OB8 Result:Outflow

Run:EV 5-yr Ex. Type II Element:OB8 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Subbasin: OB8


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	19.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	7.4 (AC-FT)	Total Direct Runoff :	2.1 (AC-FT)
Total Loss :	5.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.2 (AC-FT)	Discharge :	2.1 (AC-FT)

Reach 'R-B1' Results for Run 'EV 5-yr Ex. Type II'

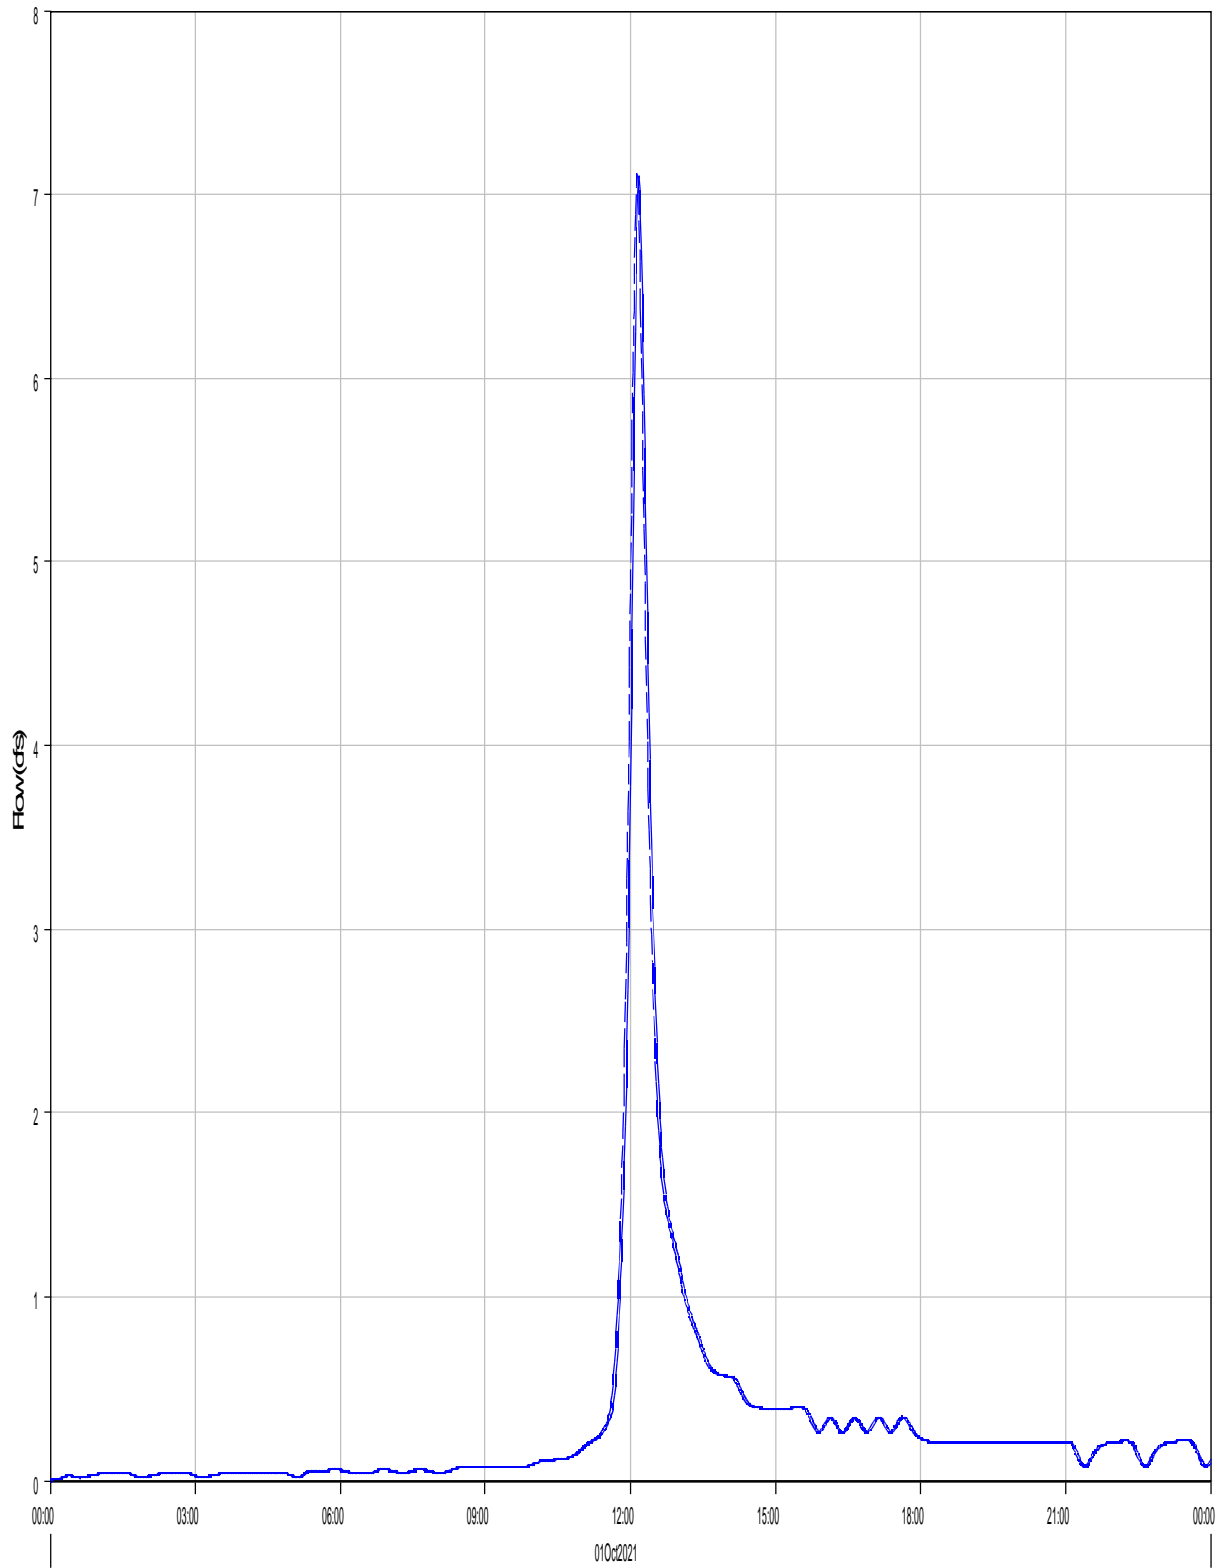

Run:EV 5-yr Ex. Type II Element:R-B1 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-B1 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Reach: R-B1


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	7.1 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	7.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:11
Total Inflow :	0.7 (AC-FT)	Total Outflow :	0.7 (AC-FT)

Reach 'R-OB4' Results for Run 'EV 5-yr Ex. Type II'

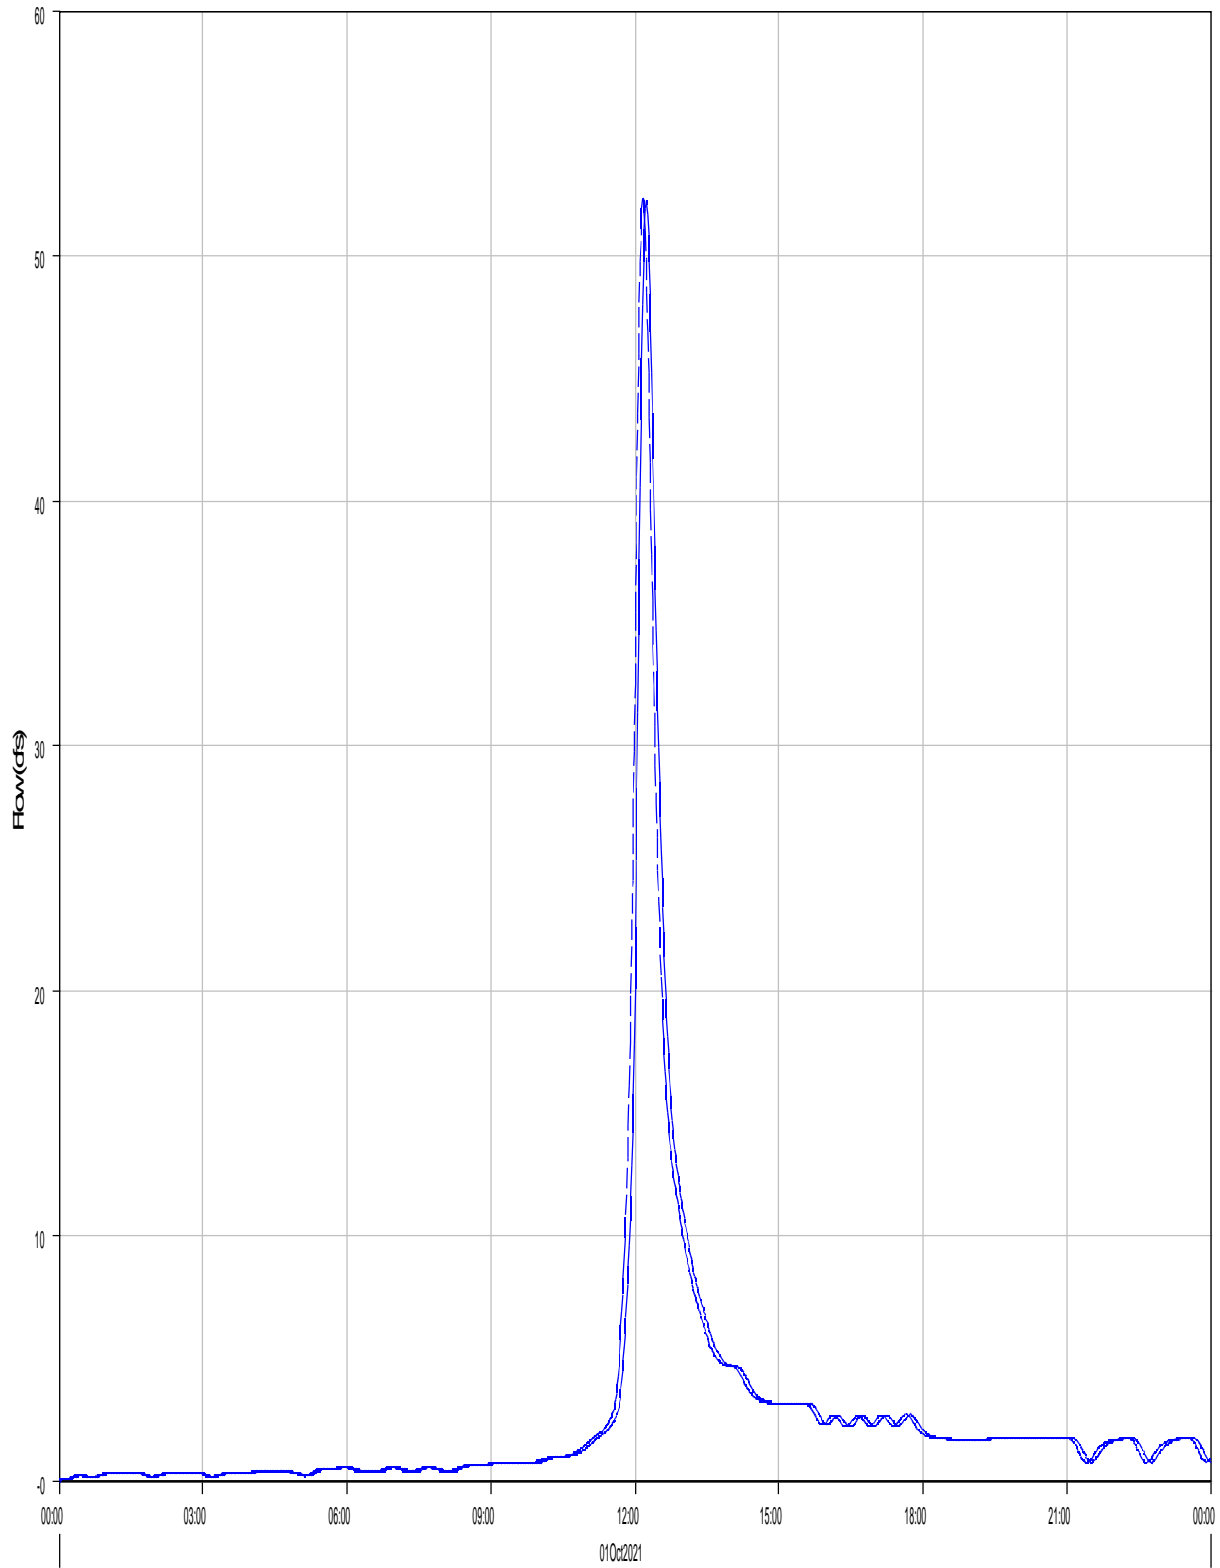

— Run:EV 5-yr Ex. Type II Element:R-OB4 Result:Outflow

- - - Run:EV 5-yr Ex. Type II Element:R-OB4 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Reach: R-OB4


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	52.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:10
Peak Outflow :	52.2 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:14
Total Inflow :	5.4 (AC-FT)	Total Outflow :	5.4 (AC-FT)

Reach 'R-OBS' Results for Run 'EV 5-yr Ex. Type II'

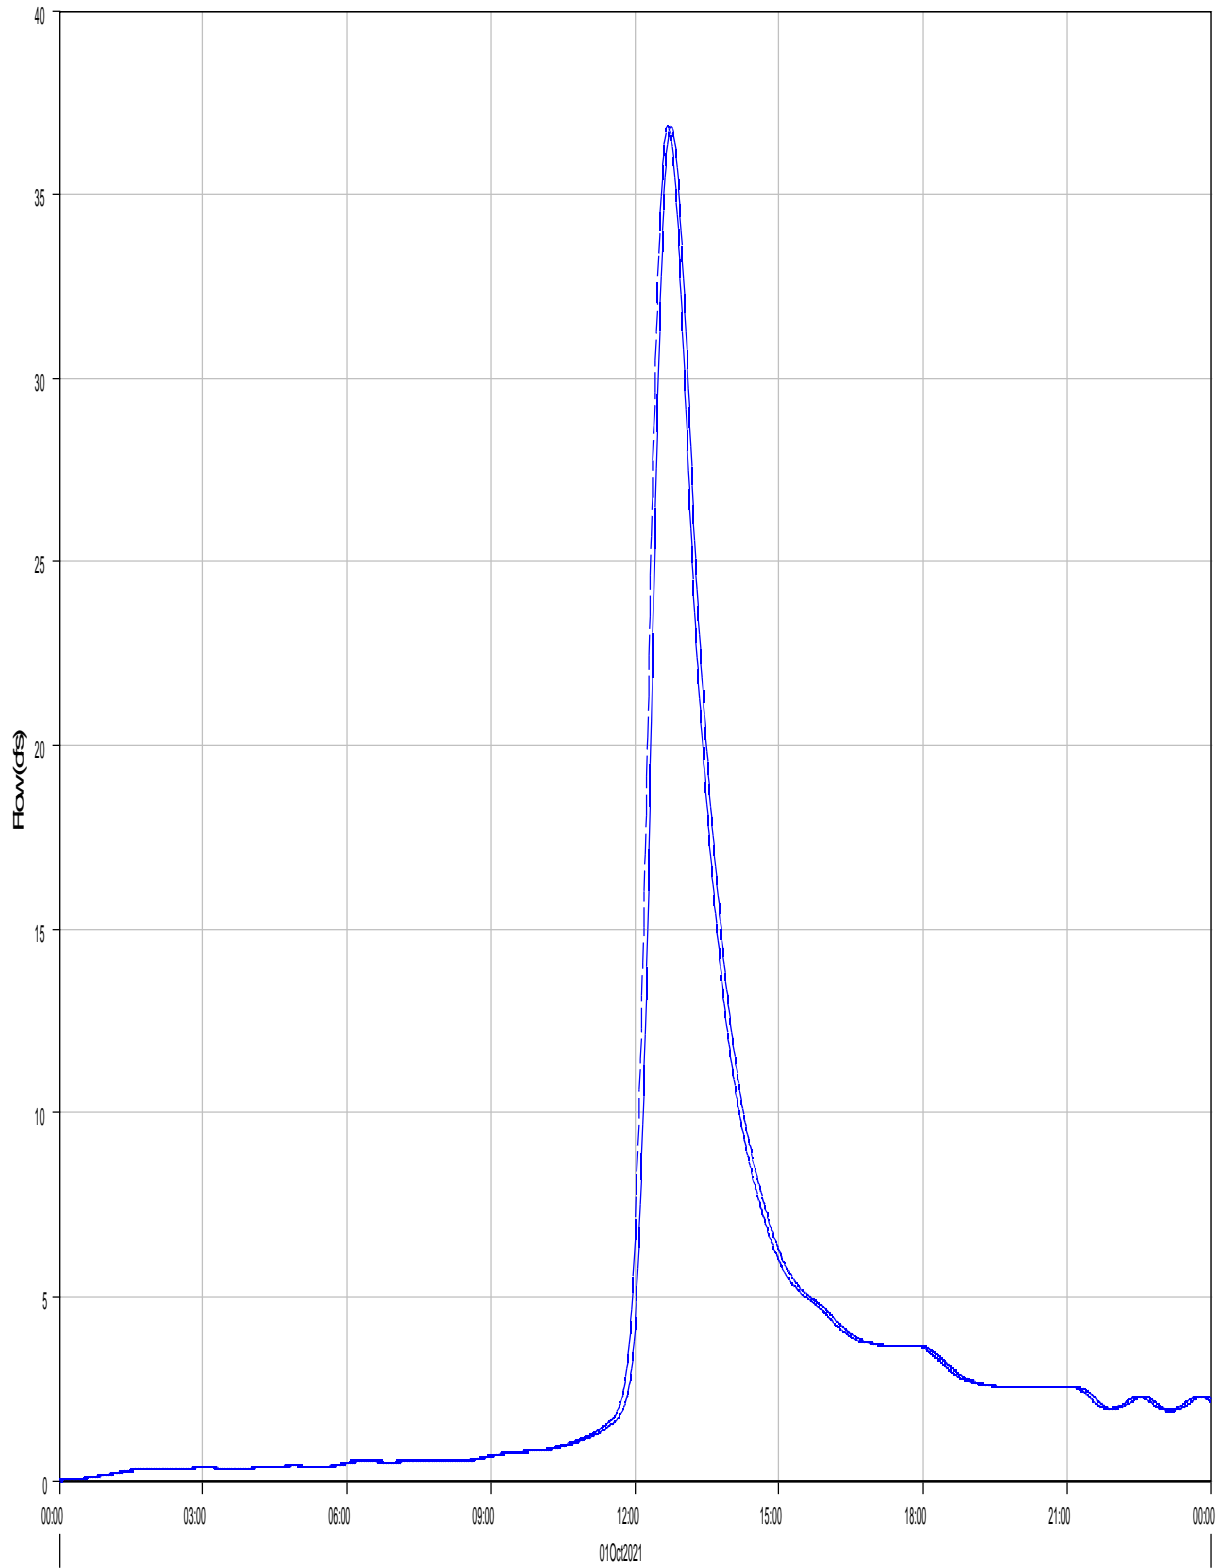

Run:EV 5-yr Ex. Type II Element:R-OBS Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OBS Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Reach: R-OB5


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	36.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:42
Peak Outflow :	36.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:45
Total Inflow :	7.4 (AC-FT)	Total Outflow :	7.4 (AC-FT)

Reach 'R-OB6' Results for Run 'EV 5-yr Ex. Type II'

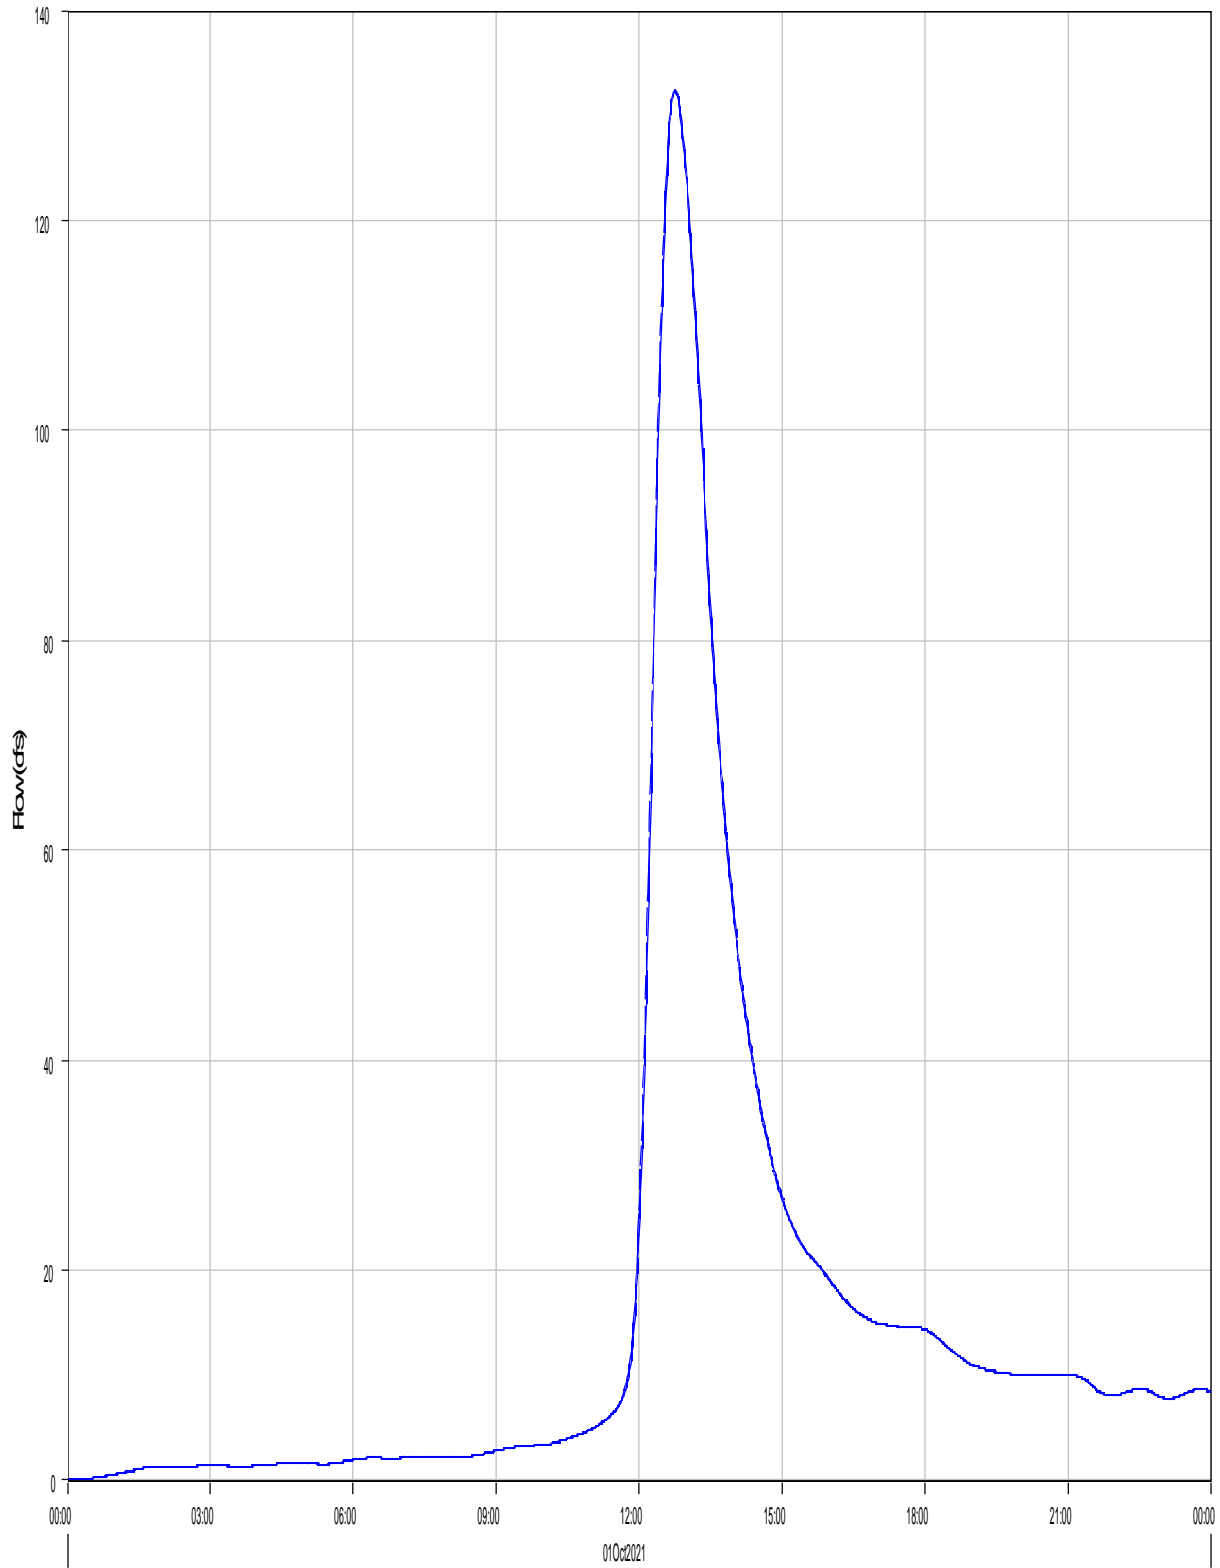

Run:EV 5-yr Ex. Type II Element:R-OB6 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB6 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Reach: R-OB6


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	132.4 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:45
Peak Outflow :	132.4 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:46
Total Inflow :	30.1 (AC-FT)	Total Outflow :	30.0 (AC-FT)

Reach 'R-OB7' Results for Run 'EV 5-yr Ex. Type II'

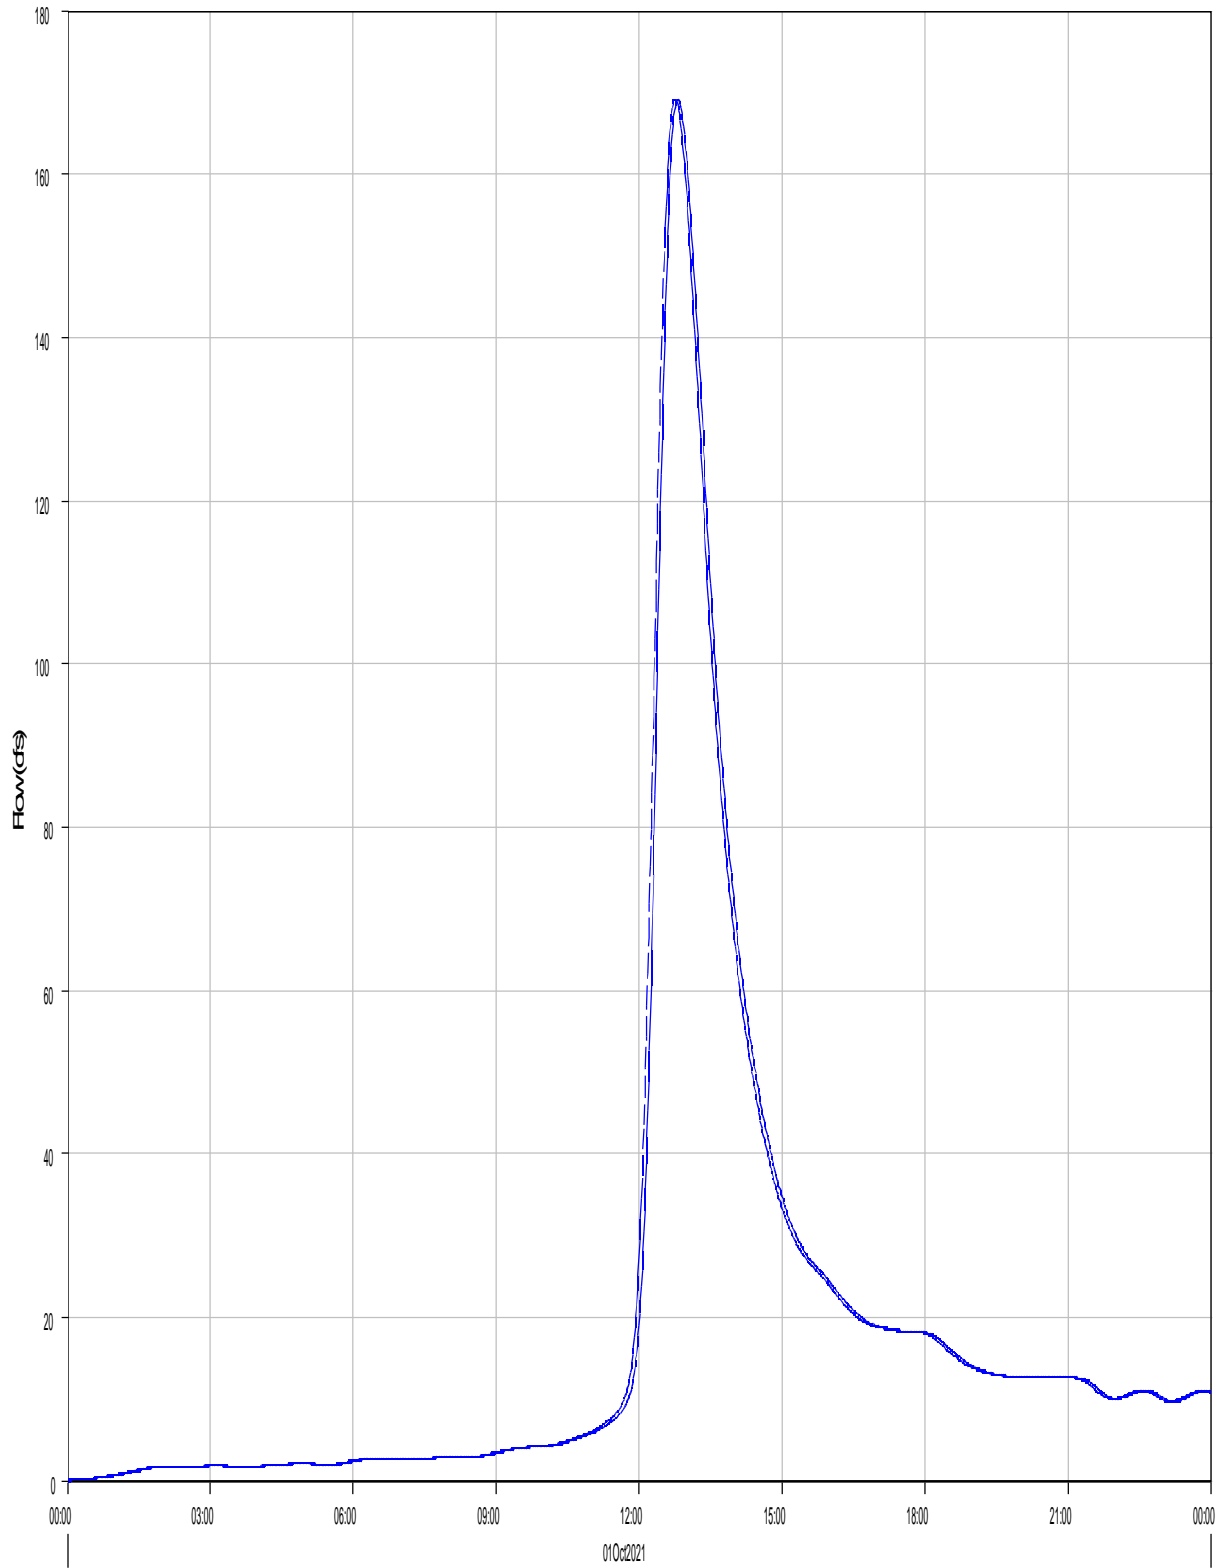

Run:EV 5-yr Ex. Type II Element:R-OB7 Result:Outflow

Run:EV 5-yr Ex. Type II Element:R-OB7 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Reach: R-OB7


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	169.2 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:46
Peak Outflow :	169.2 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:49
Total Inflow :	37.4 (AC-FT)	Total Outflow :	37.3 (AC-FT)

Reach 'R-OB8' Results for Run 'EV 5-yr Ex. Type II'

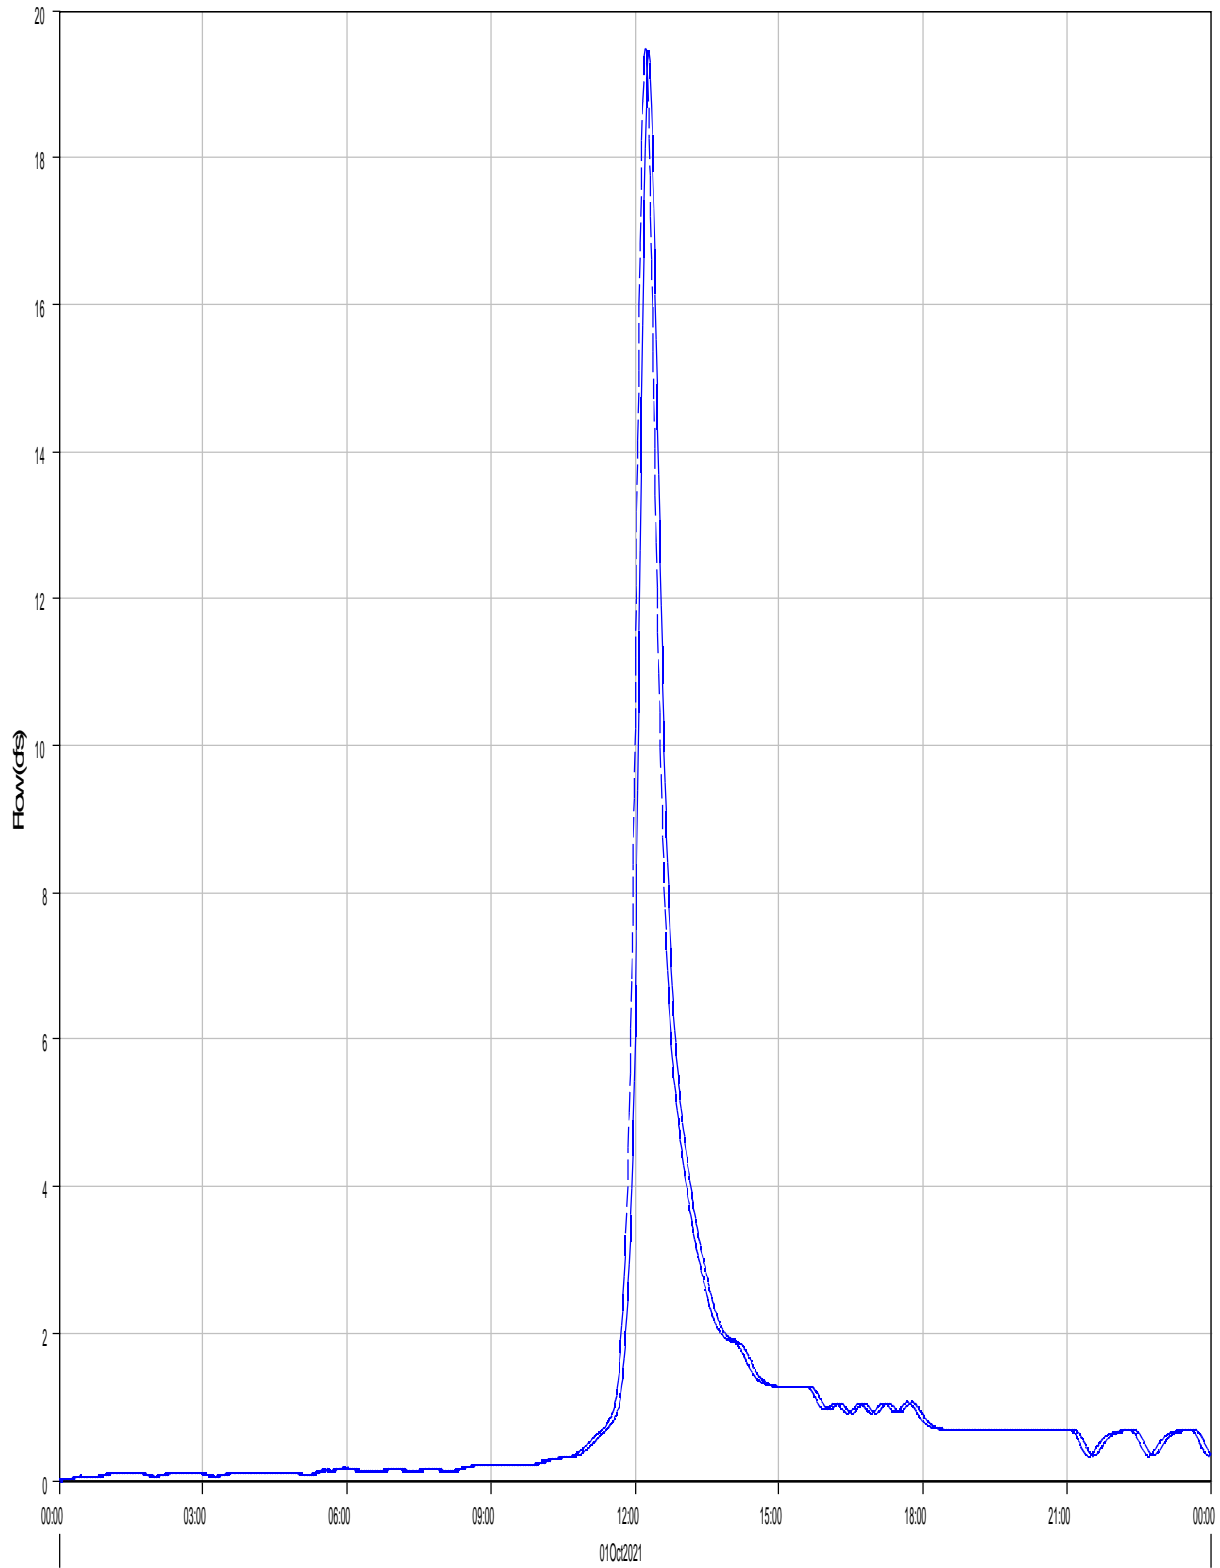

— Run:EV 5-yr Ex. Type II Element:R-OB8 Result:Outflow

- - - Run:EV 5-yr Ex. Type II Element:R-OB8 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Ex. Type II Reach: R-OB8

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 11Mar2022, 14:50:40 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results



Peak Inflow :	19.5 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	19.4 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:17
Total Inflow :	2.1 (AC-FT)	Total Outflow :	2.1 (AC-FT)

Project: Eagleview_Subdivision Simulation Run: EV 100-yr Ex. Type II

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
 End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
 Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (AC-FT)
B1	0.0091800	8.5	01Oct2021, 12:11	0.8
B2	0.0647266	48.5	01Oct2021, 12:15	5.3
B3	0.0930359	110.0	01Oct2021, 12:04	7.8
B4	0.0229422	18.2	01Oct2021, 12:13	1.9
J1	0.0253831	27.3	01Oct2021, 12:10	2.5
J2	0.1928516	183.8	01Oct2021, 12:13	18.8
J3	1.2354980	515.5	01Oct2021, 12:44	112.7
J4	1.0678500	478.0	01Oct2021, 12:44	97.8
J-OB6	0.8431300	371.3	01Oct2021, 12:43	78.1
OB1	0.0162031	18.8	01Oct2021, 12:08	1.7
OB2	0.0438438	52.7	01Oct2021, 12:08	4.7
OB3	0.0678750	67.1	01Oct2021, 12:12	6.9
OB4	0.0164062	18.9	01Oct2021, 12:10	1.8
OB5	0.2247200	106.9	01Oct2021, 12:40	19.7
OB6	0.1850100	113.2	01Oct2021, 12:29	17.5
OB7	0.6581200	284.2	01Oct2021, 12:52	60.6
OB8	0.0516699	51.6	01Oct2021, 12:13	5.4
R-B1	0.0162031	18.7	01Oct2021, 12:10	1.7
R-OB4	0.1281250	135.8	01Oct2021, 12:13	13.4
R-OB5	0.2247200	106.8	01Oct2021, 12:43	19.7
R-OB6	0.8431300	371.3	01Oct2021, 12:44	78.1
R-OB7	1.0678500	477.9	01Oct2021, 12:46	97.7
R-OB8	0.0516699	51.5	01Oct2021, 12:16	5.4

Subbasin "B1" Results for Run "EV 100-yr Ex. Type II"

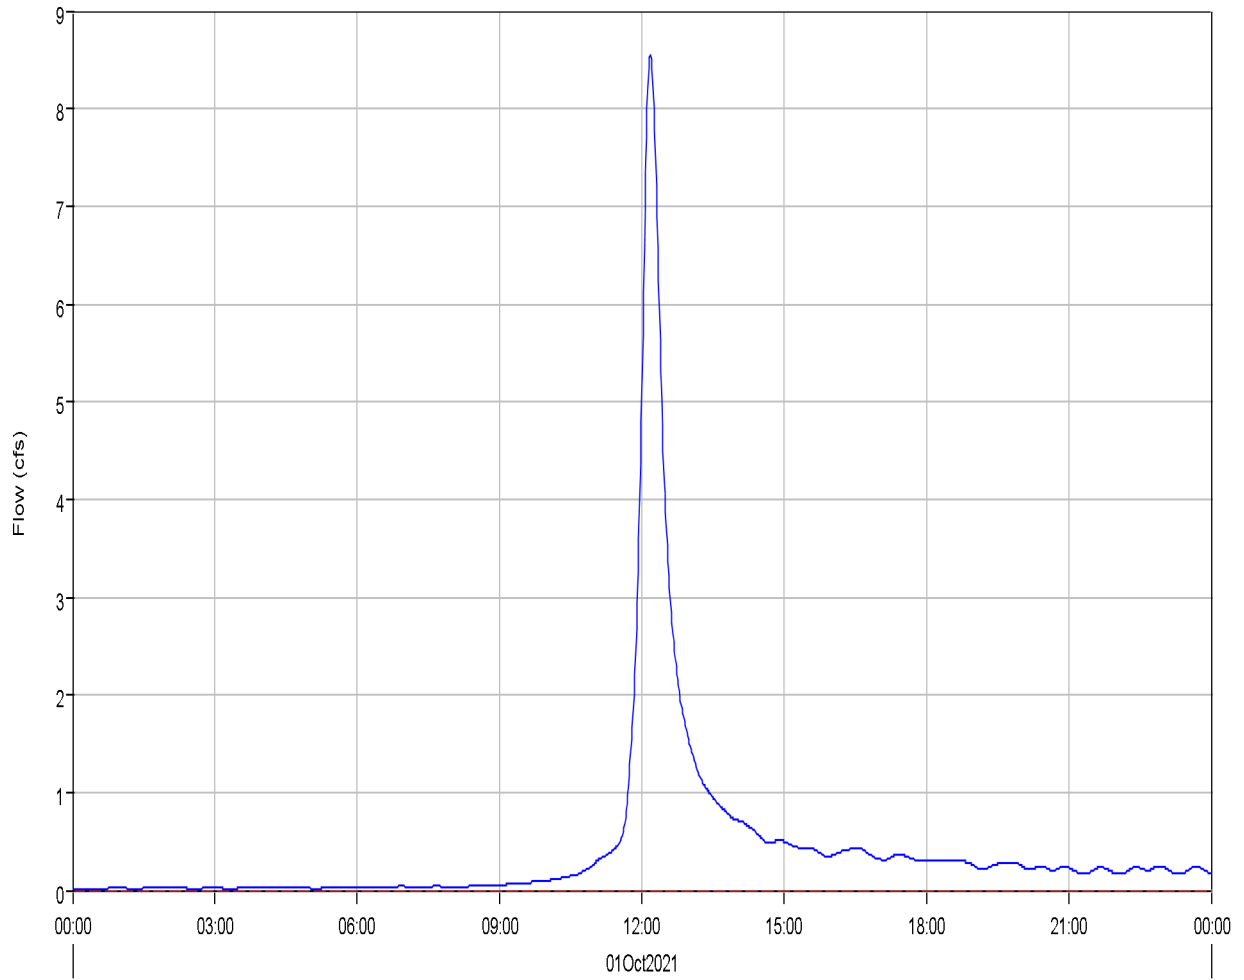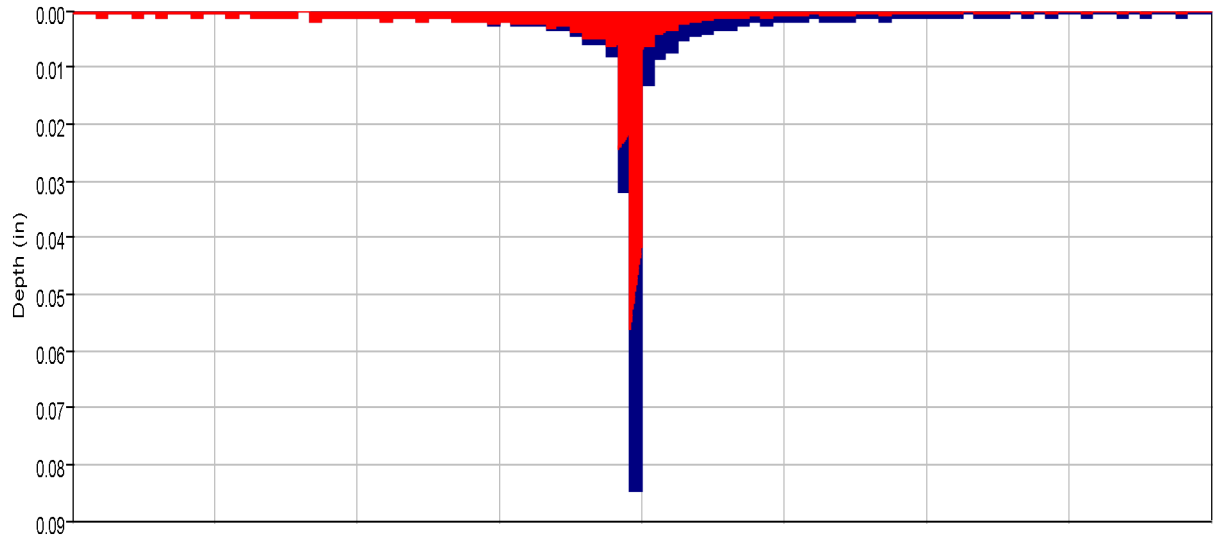

Run:EV 100-yr Ex. Type II Element:B1 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:B1 Result:Outflow

Run:EV 100-yr Ex. Type II Element:B1 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:B1 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: B1



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	8.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:11
Total Precipitation :	2.3 (AC-FT)	Total Direct Runoff :	0.8 (AC-FT)
Total Loss :	1.4 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.8 (AC-FT)	Discharge :	0.8 (AC-FT)

Subbasin "B2" Results for Run "EV 100-yr Ex. Type II"

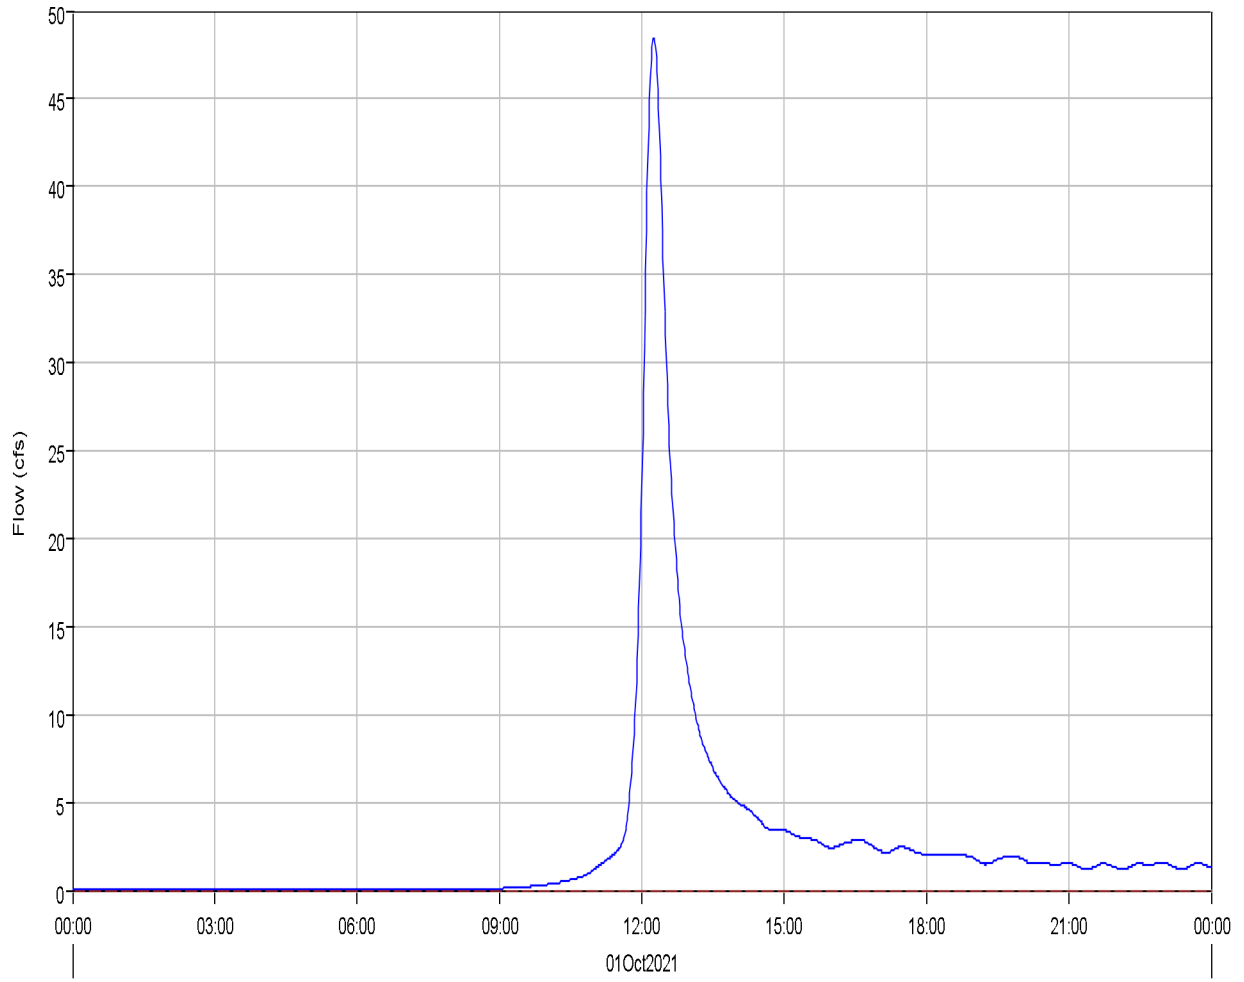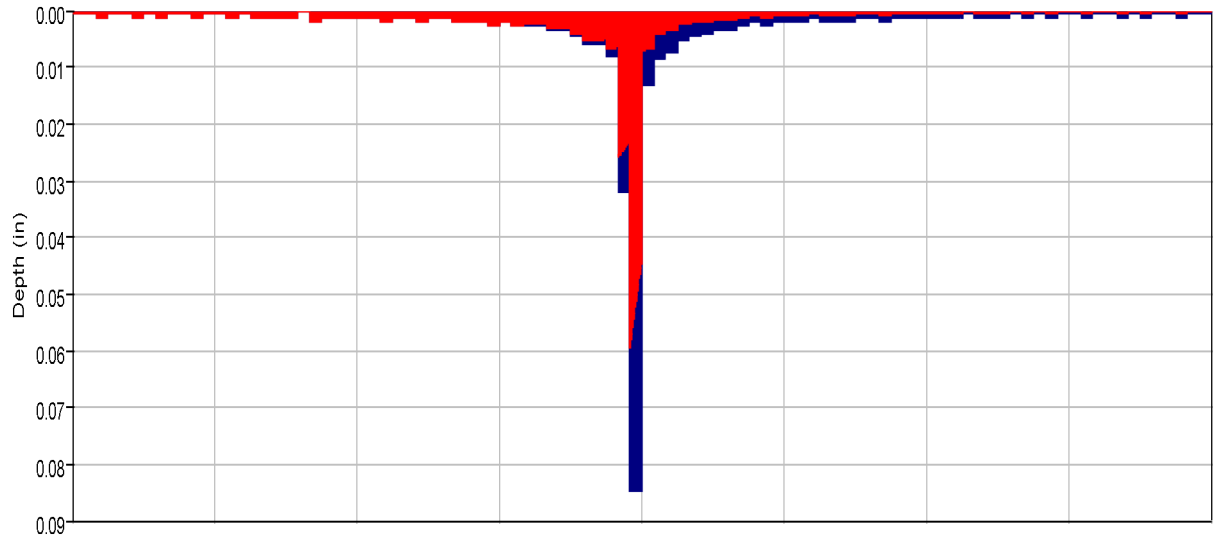

Run:EV 100-yr Ex. Type II Element:B2 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:B2 Result:Outflow

Run:EV 100-yr Ex. Type II Element:B2 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:B2 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: B2


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	48.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:15
Total Precipitation :	15.9 (AC-FT)	Total Direct Runoff :	5.3 (AC-FT)
Total Loss :	10.5 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	5.4 (AC-FT)	Discharge :	5.3 (AC-FT)

Subbasin "B3" Results for Run "EV 100-yr Ex. Type II"

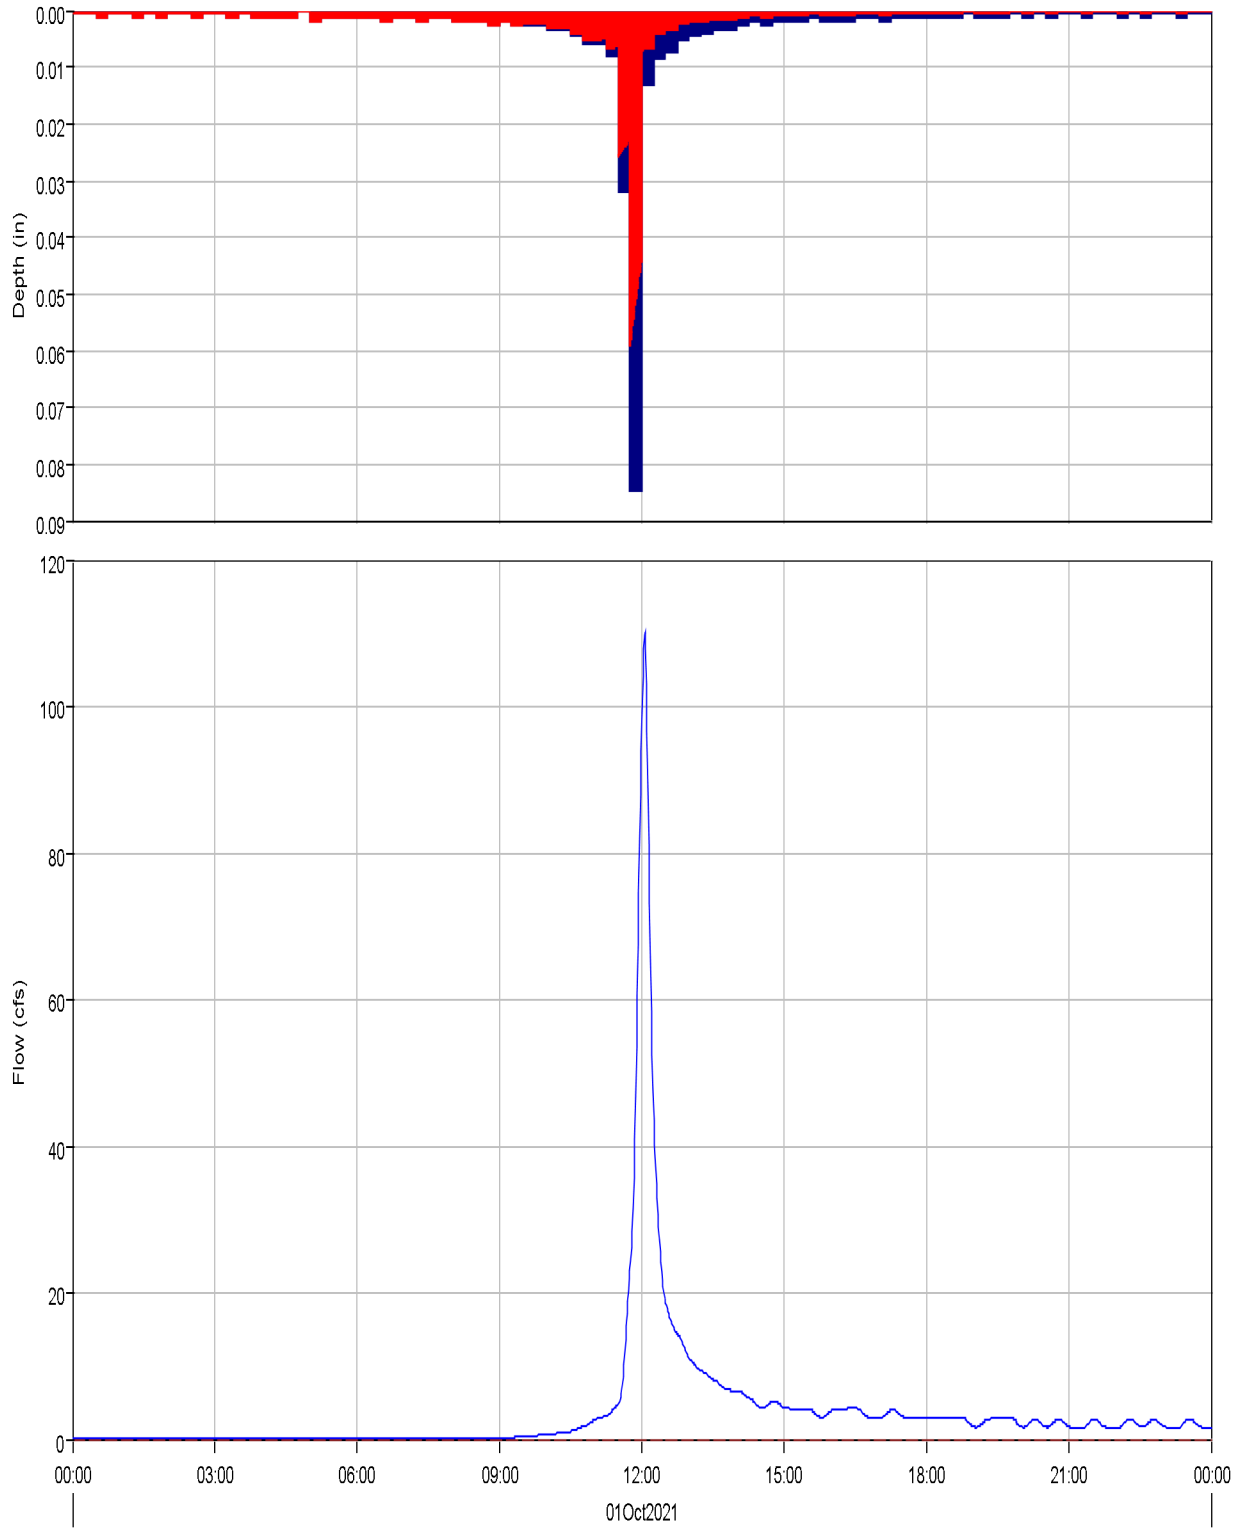

Run:EV 100-yr Ex. Type II Element:B3 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:B3 Result:Outflow

Run:EV 100-yr Ex. Type II Element:B3 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:B3 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: B3


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	110.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:04
Total Precipitation :	22.8 (AC-FT)	Total Direct Runoff :	7.8 (AC-FT)
Total Loss :	15.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	7.8 (AC-FT)	Discharge :	7.8 (AC-FT)

Subbasin "B4" Results for Run "EV 100-yr Ex. Type II"

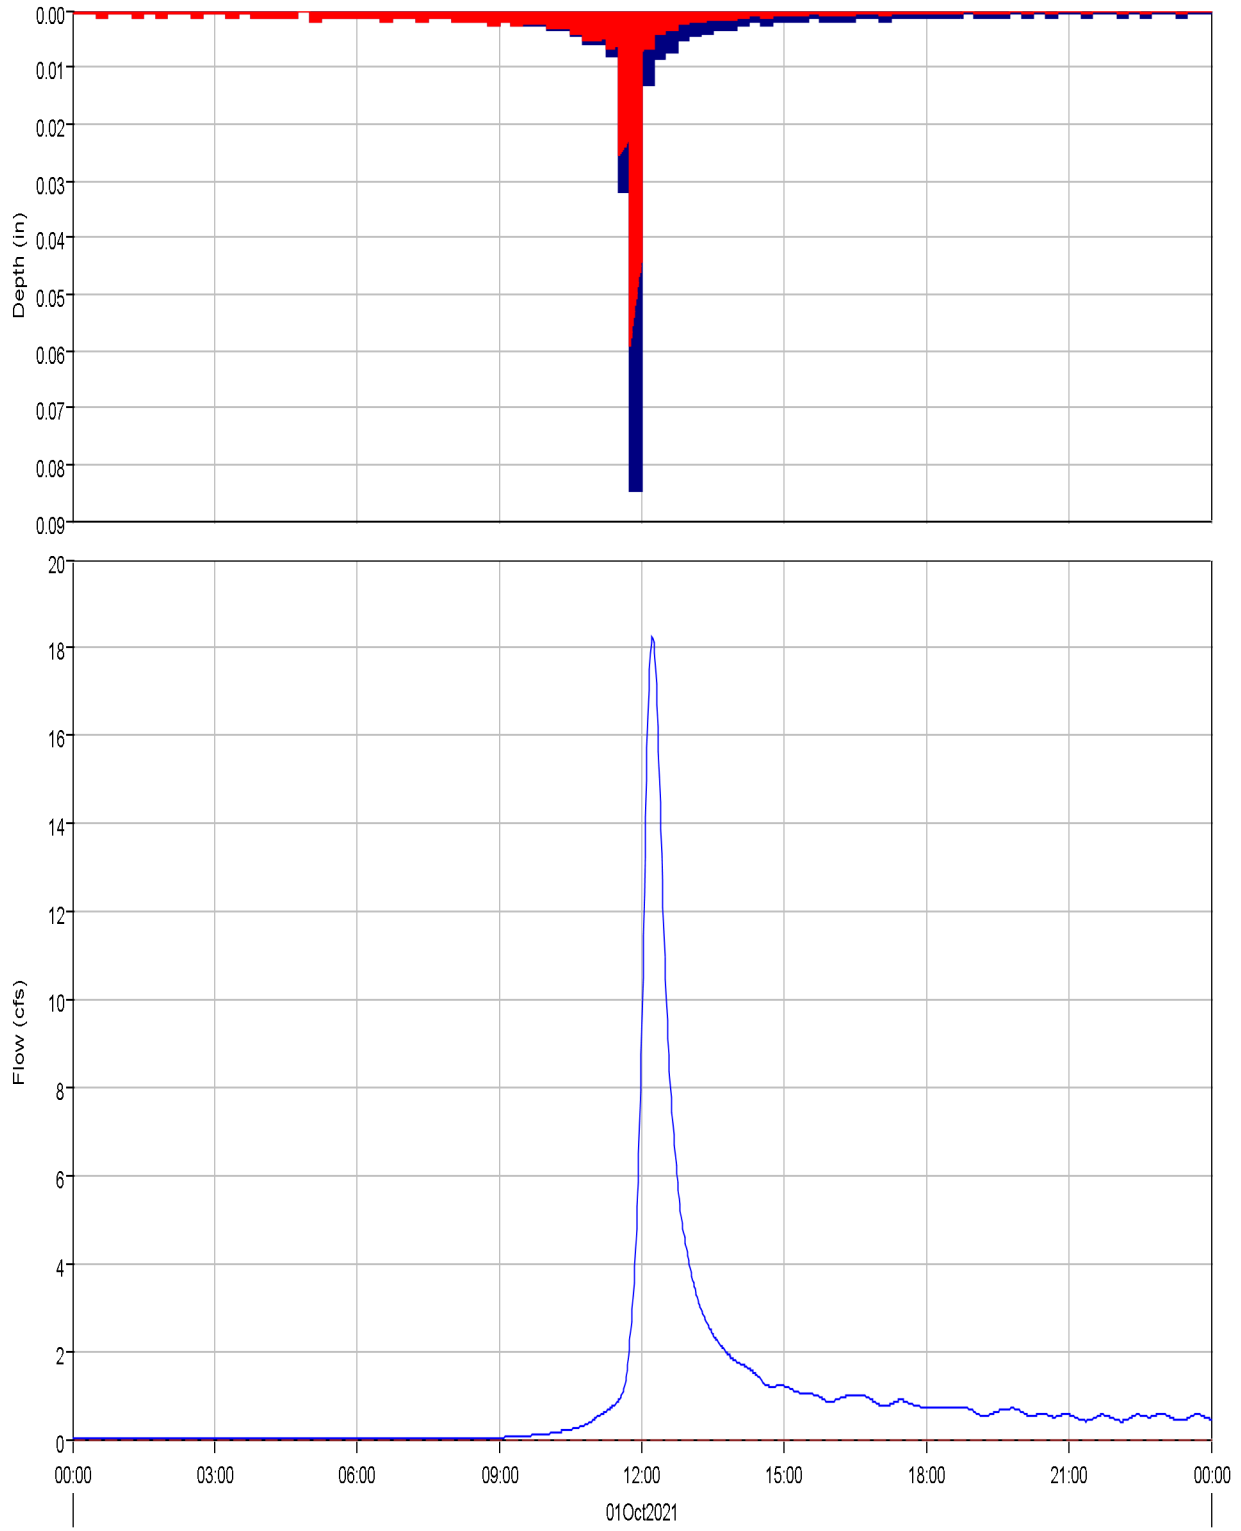

Run:EV 100-yr Ex. Type II Element:B4 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:B4 Result:Outflow

Run:EV 100-yr Ex. Type II Element:B4 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:B4 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: B4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	18.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	5.6 (AC-FT)	Total Direct Runoff :	1.9 (AC-FT)
Total Loss :	3.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.9 (AC-FT)	Discharge :	1.9 (AC-FT)

Junction 'J1' Results for Run 'EV 100-yr Ex. Type II'

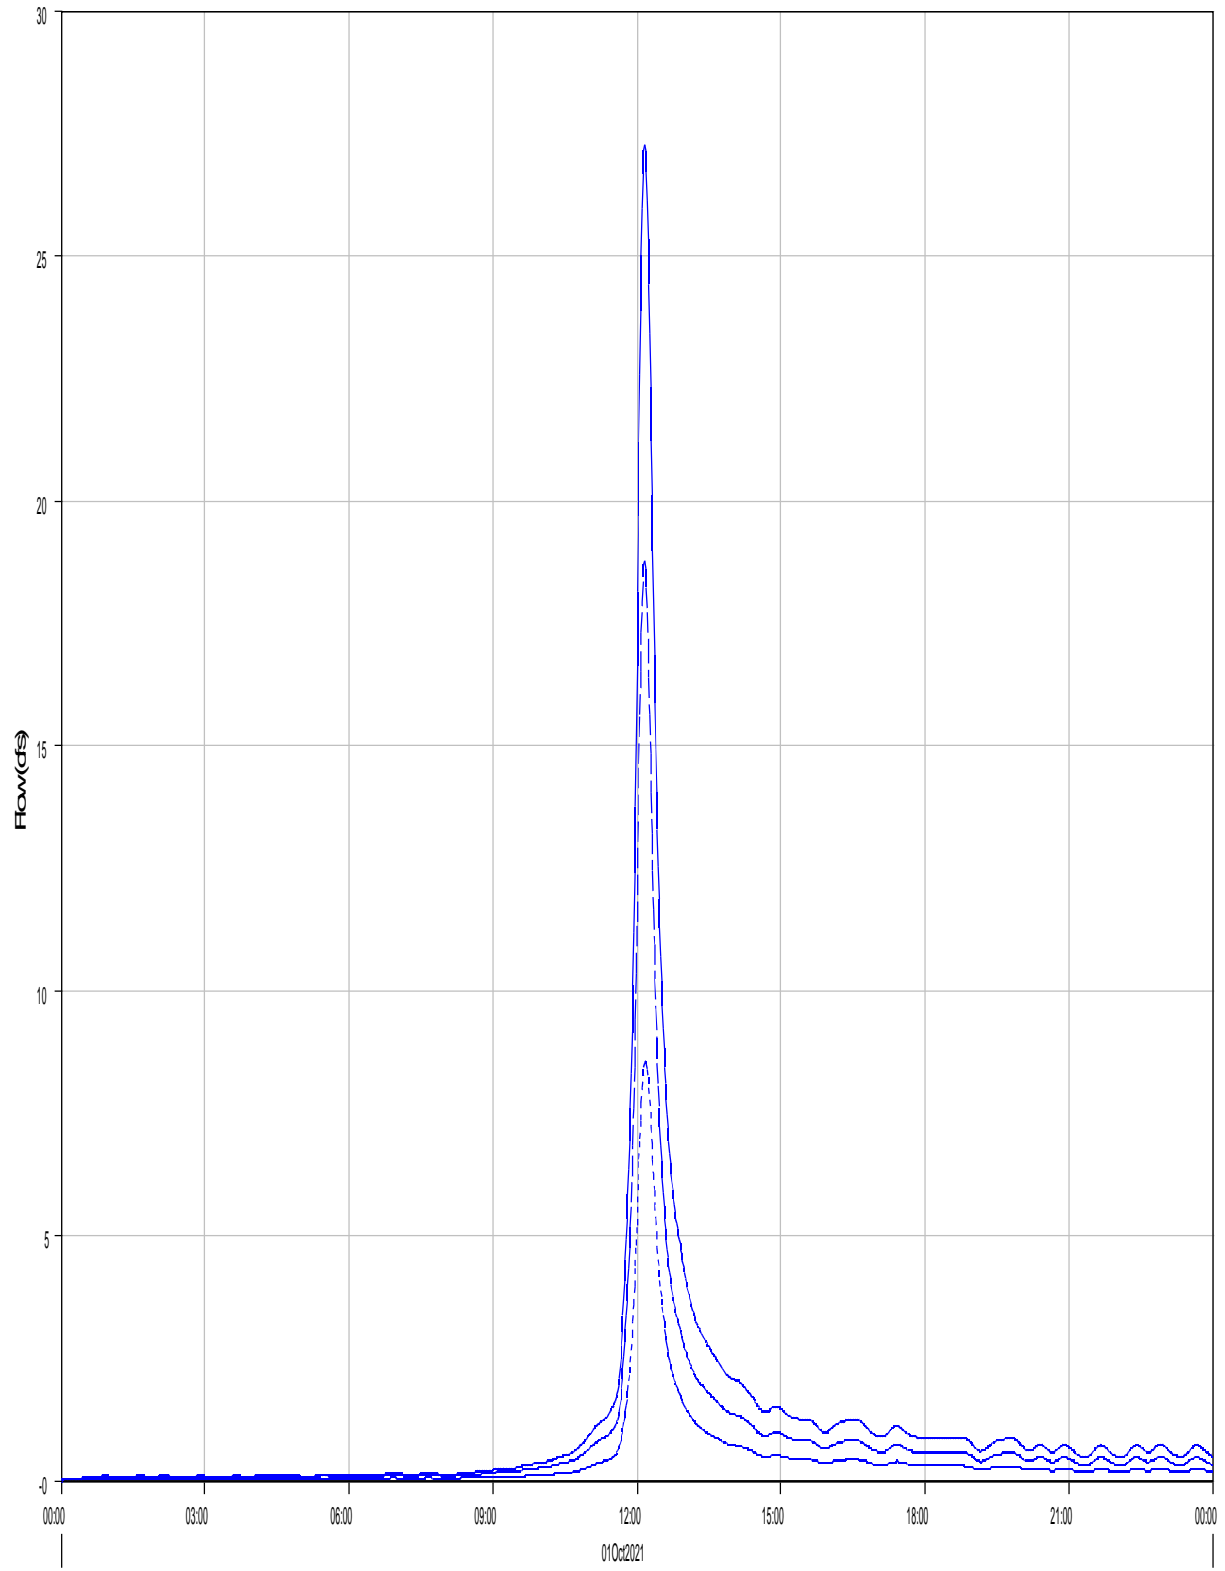

— Run:EV 100-yr Ex. Type II Element:J1 Result:Outflow

- - - Run:EV 100-yr Ex. Type II Element:R-B1 Result:Outflow

... Run:EV 100-yr Ex. Type II Element:B1 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Junction: J1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 27.3 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:10
Total Outflow : 2.5 (AC-FT)

Junction "J2" Results for Run "EV 100-yr Ex. Type II"

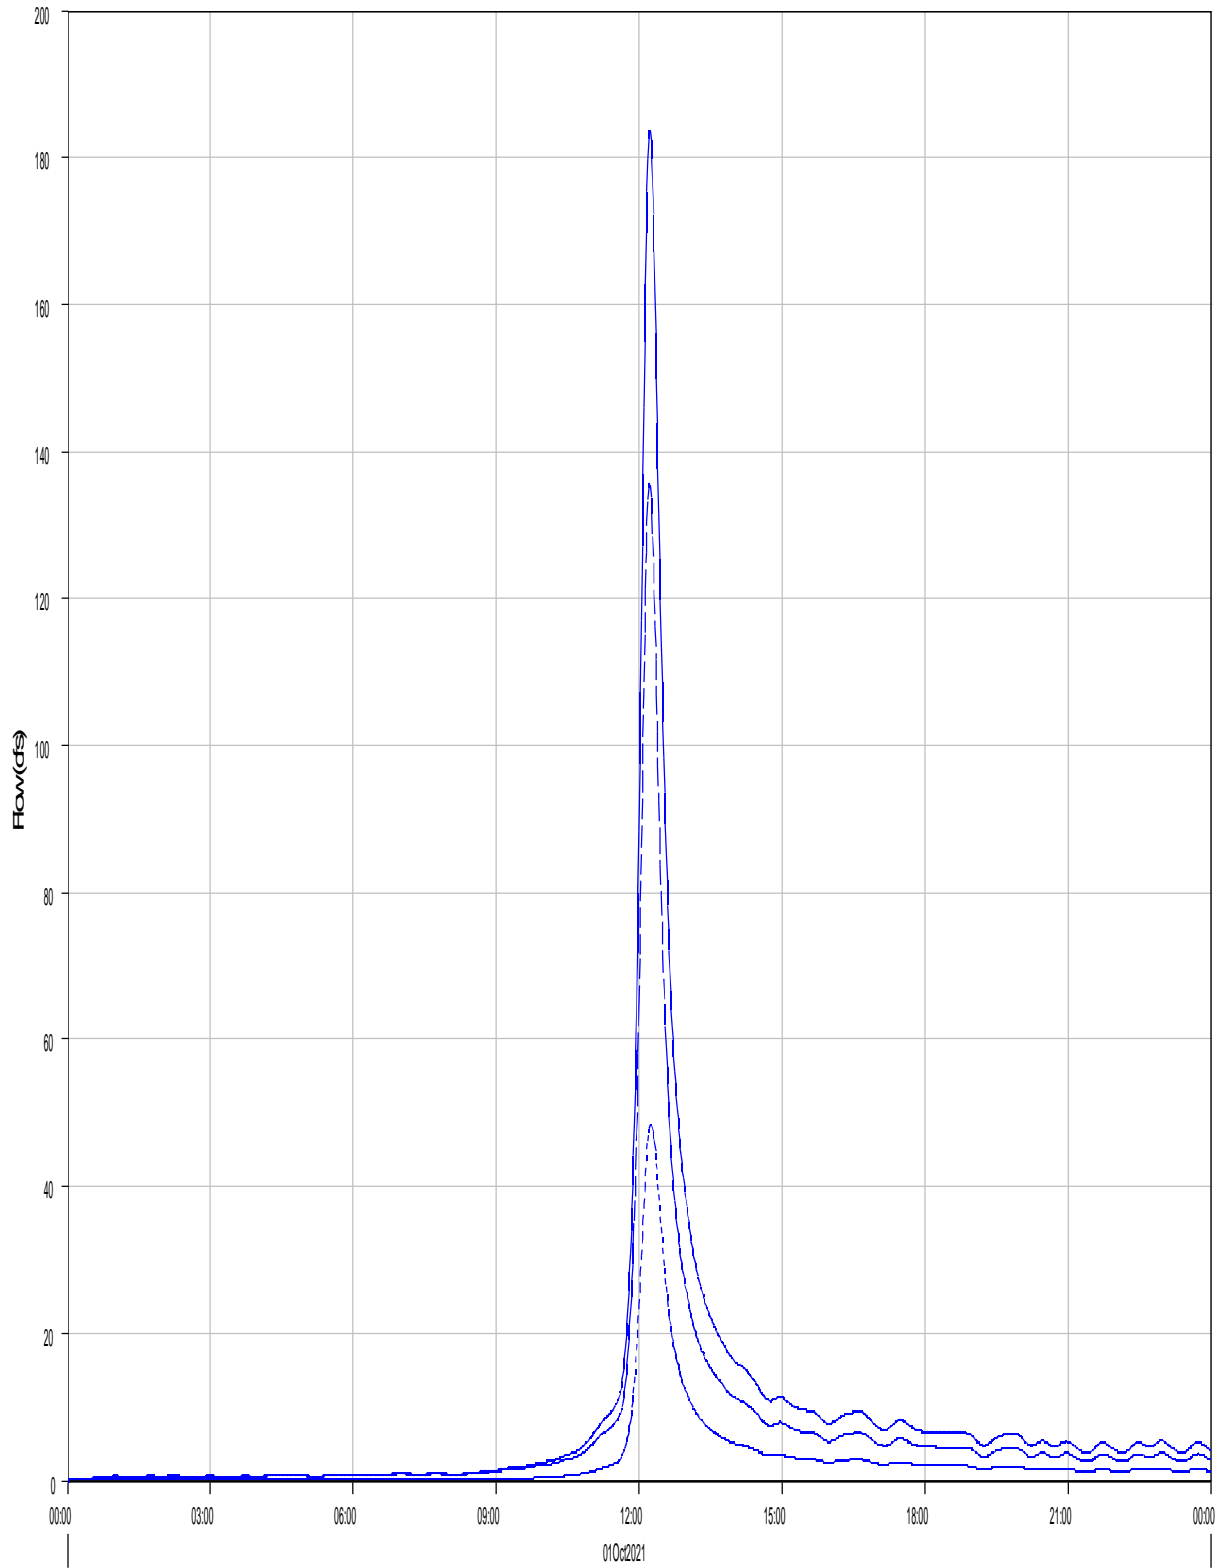

— Run:EV 100-yr Ex. Type II Element:J2 Result:Outflow

- - - Run:EV 100-yr Ex. Type II Element:R-CB4 Result:Outflow

... Run:EV 100-yr Ex. Type II Element:B2 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Junction: J2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 183.8 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:13
Total Outflow : 18.8 (AC-FT)

Junction 'J3' Results for Run 'EV 100-yr Ex. Type II'

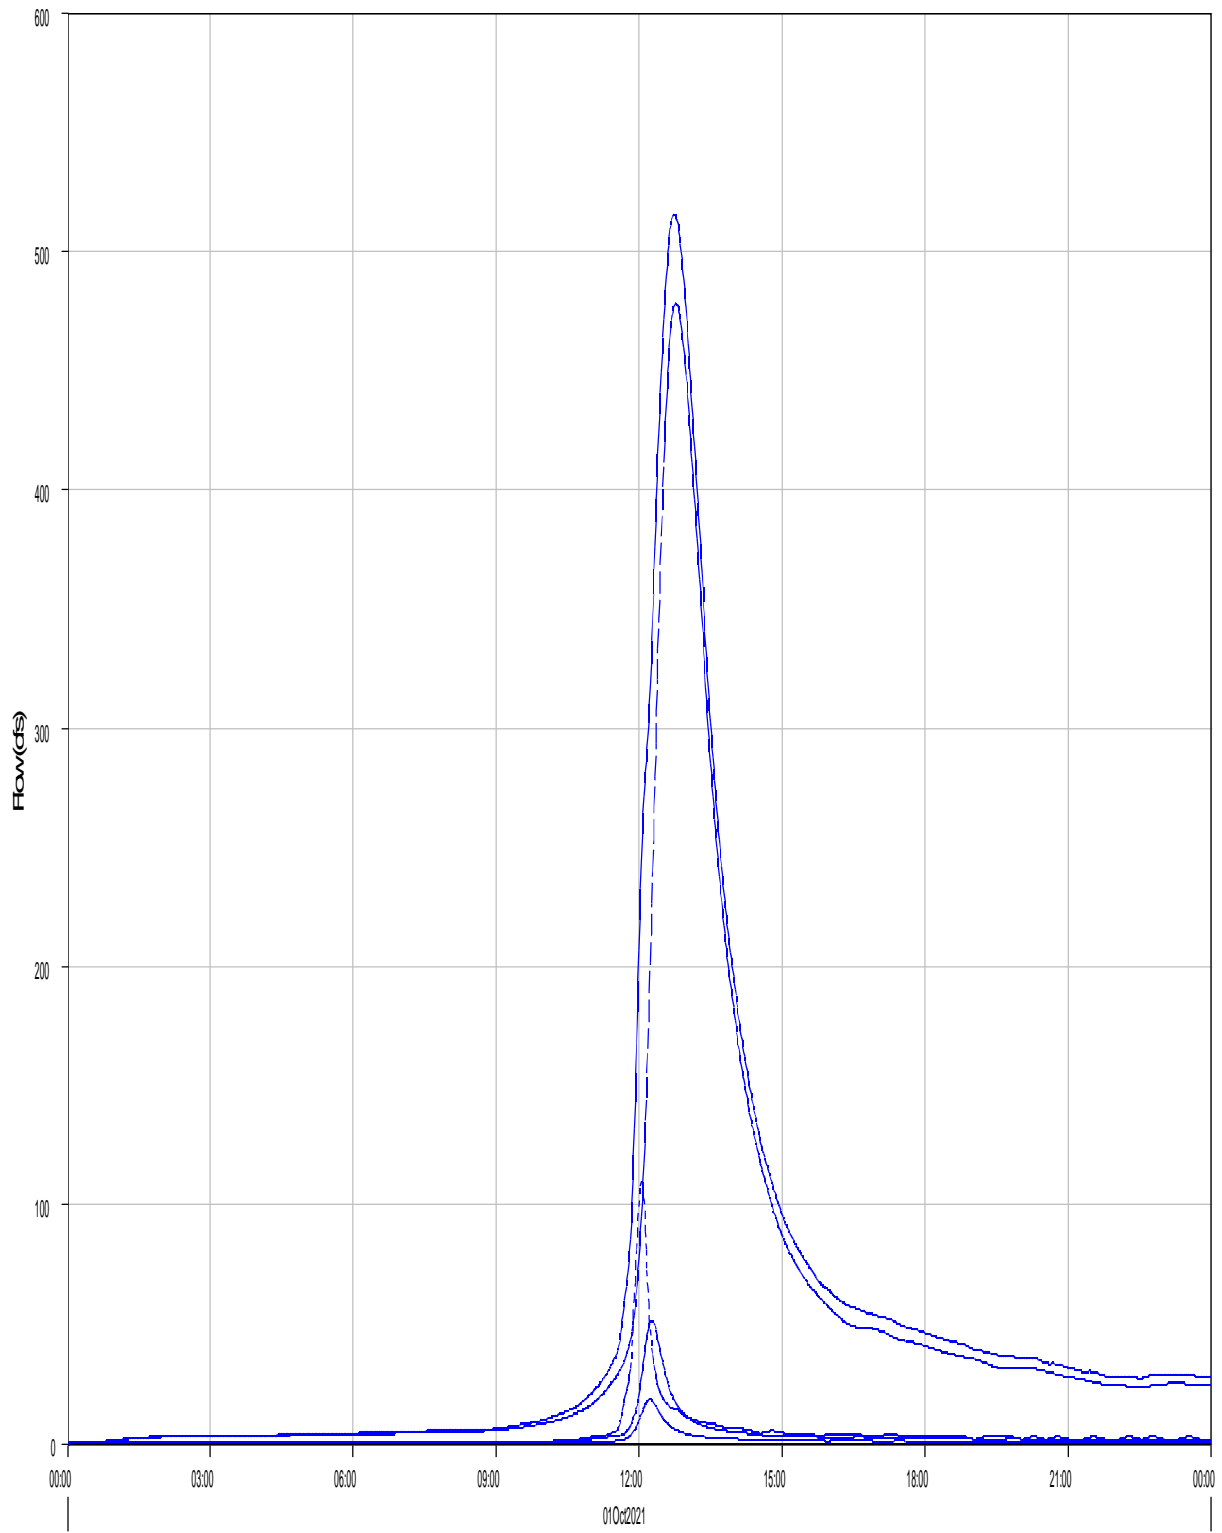

— Run/EV 100-yr Ex. Type II Element J3 Result/Outflow
- - - Run/EV 100-yr Ex. Type II Element OB8 Result/Outflow

- - - Run/EV 100-yr Ex. Type II Element OB7 Result/Outflow
- - - Run/EV 100-yr Ex. Type II Element B4 Result/Outflow

- - - Run/EV 100-yr Ex. Type II Element B3 Result/Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Junction: J3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 515.5 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:44
Total Outflow : 112.7 (AC-FT)

Junction "J4" Results for Run "EV 100-yr Ex. Type II"

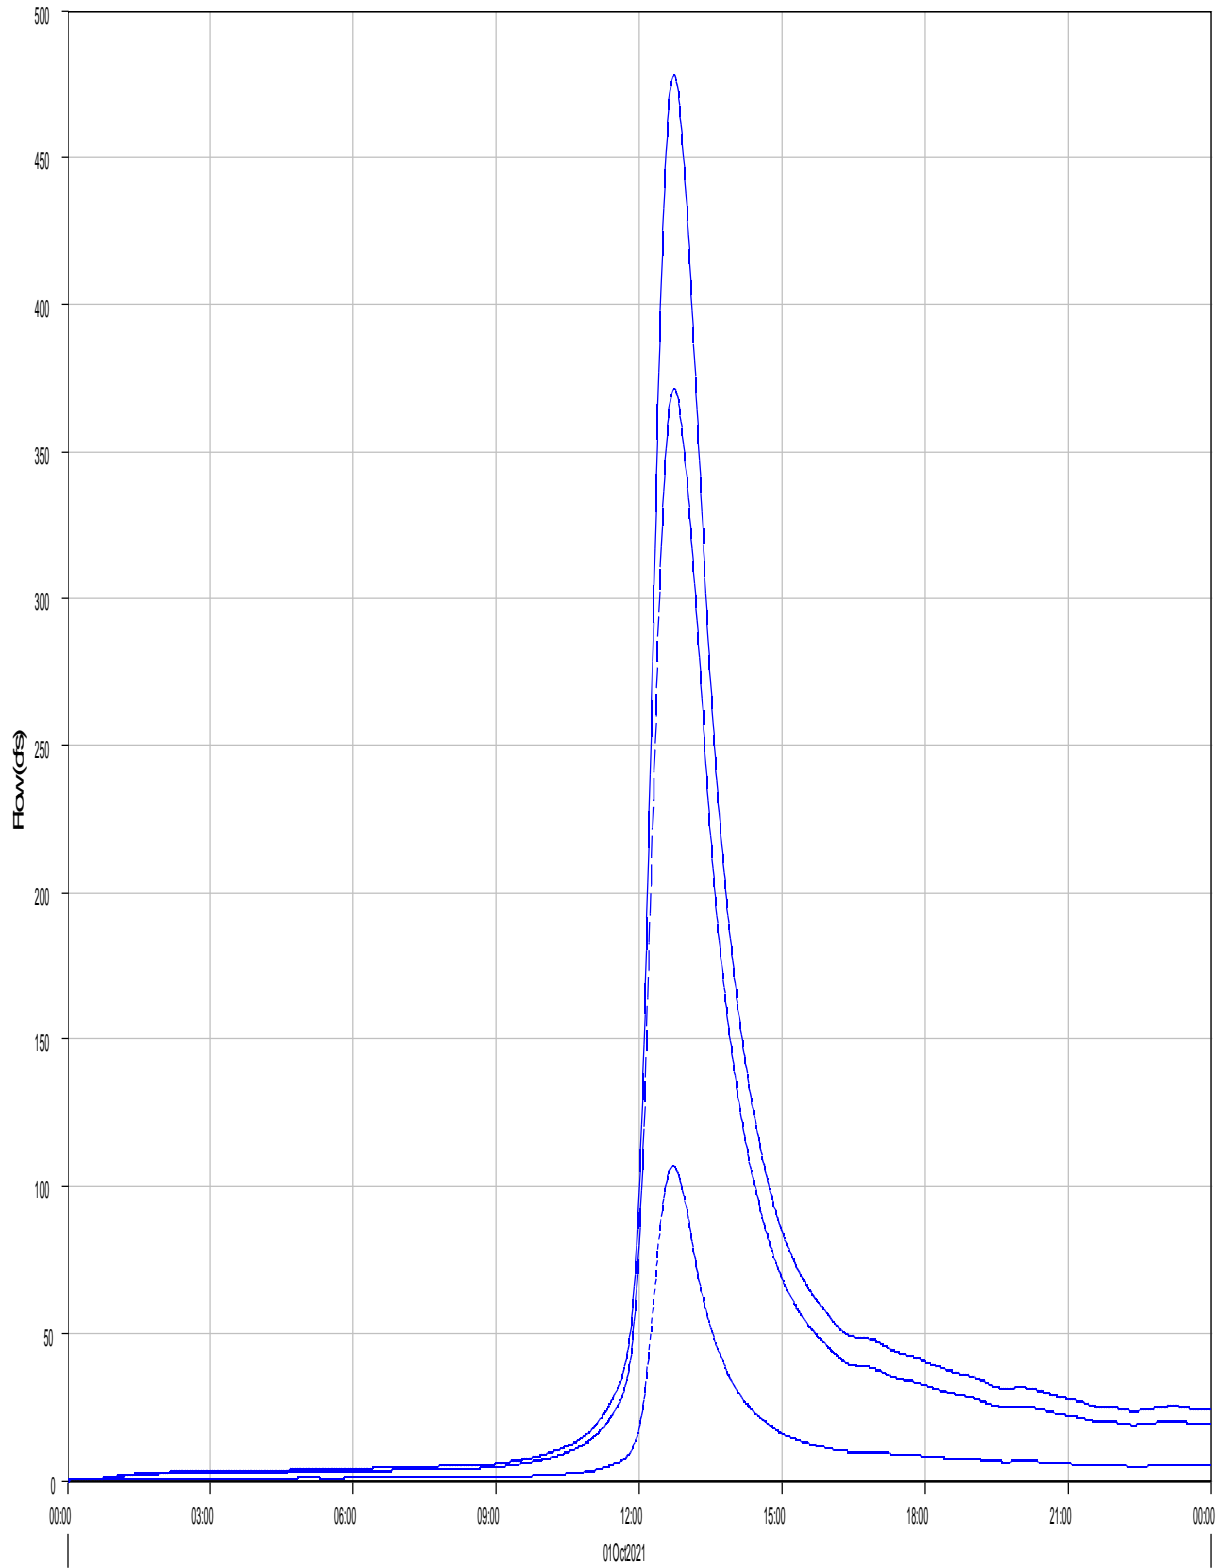

— Run:EV 100-yr Ex. Type II Element:J4 Result:Outflow

- - - Run:EV 100-yr Ex. Type II Element:R-OB6 Result:Outflow

... Run:EV 100-yr Ex. Type II Element:R-OB5 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Junction: J4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Outflow : 478.0 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:44
Total Outflow : 1.72 (IN)

Junction 'J-OB6' Results for Run 'EV 100-yr Ex. Type II'

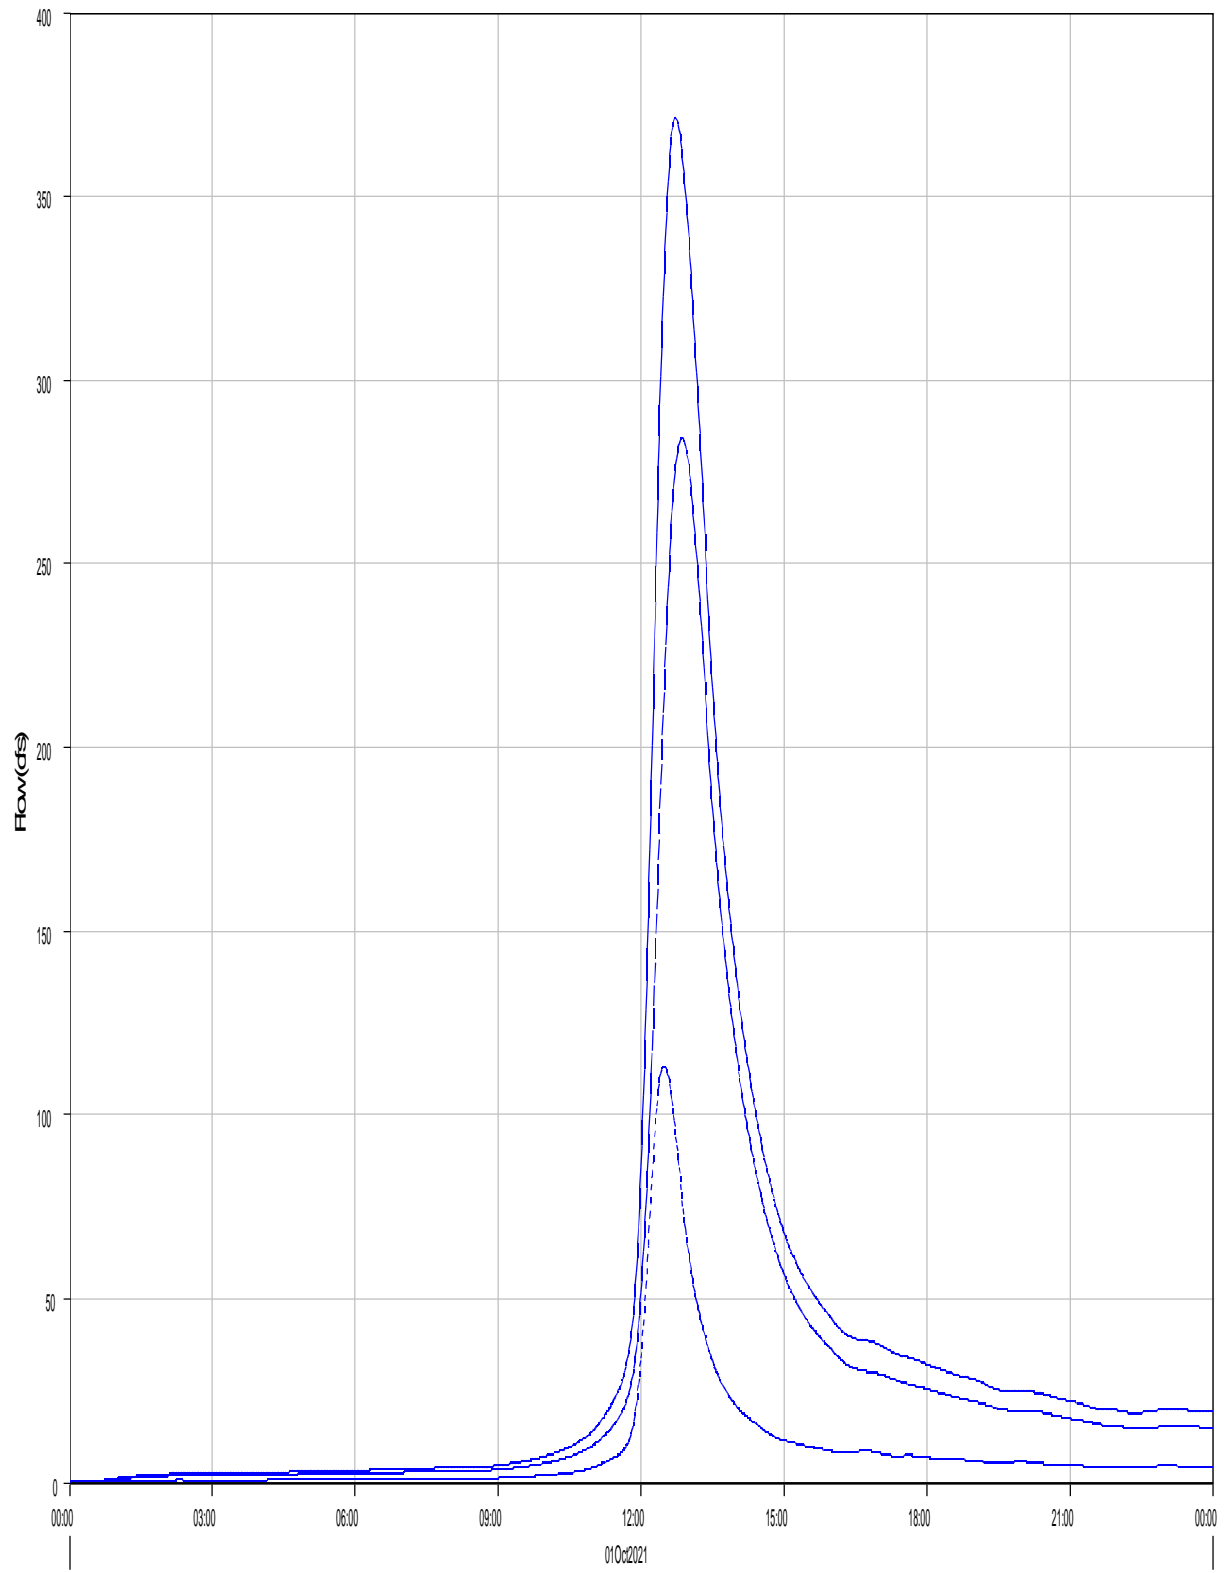

Run:EV 100-yr Ex. Type II Element:OB6 Result:Outflow

Run:EV 100-yr Ex. Type II Element:OB7 Result:Outflow



Run:EV 100-yr Ex. Type II Element:OB8 Result:Outflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Junction: J-OB6
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm
Volume Units: AC-FT

Computed Results

Peak Outflow : 371.3 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:43
Total Outflow : 78.1 (AC-FT)

Subbasin "OB1" Results for Run "EV 100-yr Ex. Type II"

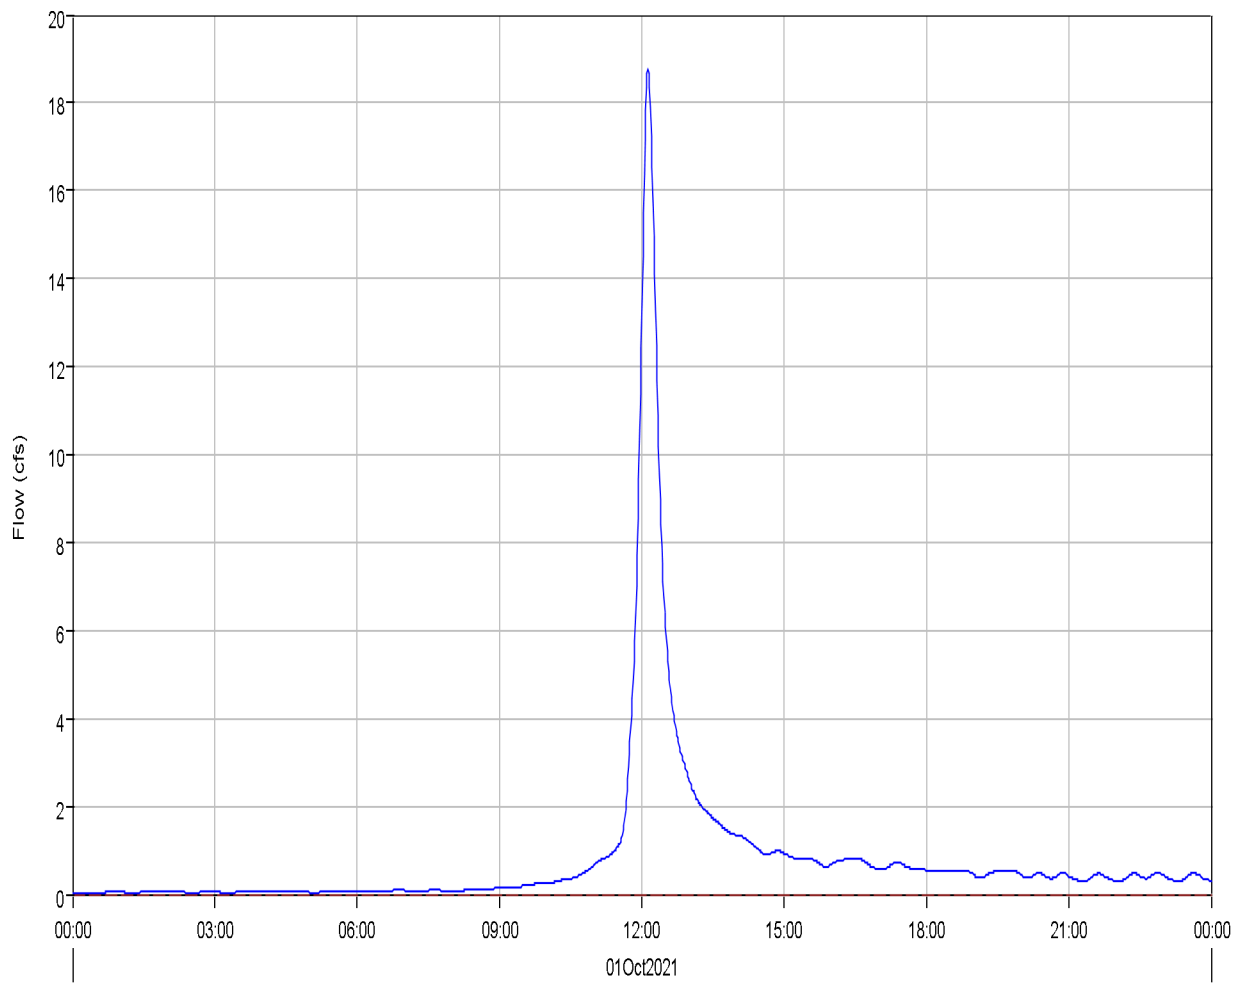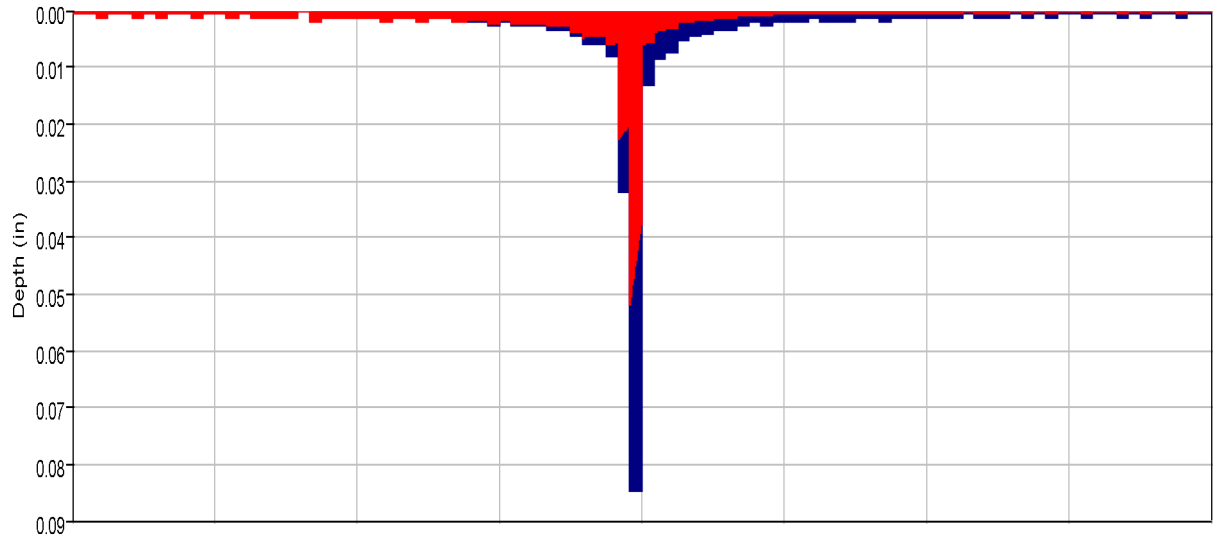

Run:EV 100-yr Ex. Type II Element:OB1 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB1 Result:Outflow



Run:EV 100-yr Ex. Type II Element:OB1 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB1 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm
Volume Units: AC-FT

Computed Results

Peak Discharge :	18.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	4.0 (AC-FT)	Total Direct Runoff :	1.7 (AC-FT)
Total Loss :	2.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.7 (AC-FT)	Discharge :	1.7 (AC-FT)

Subbasin "OB2" Results for Run "EV 100-yr Ex. Type II"

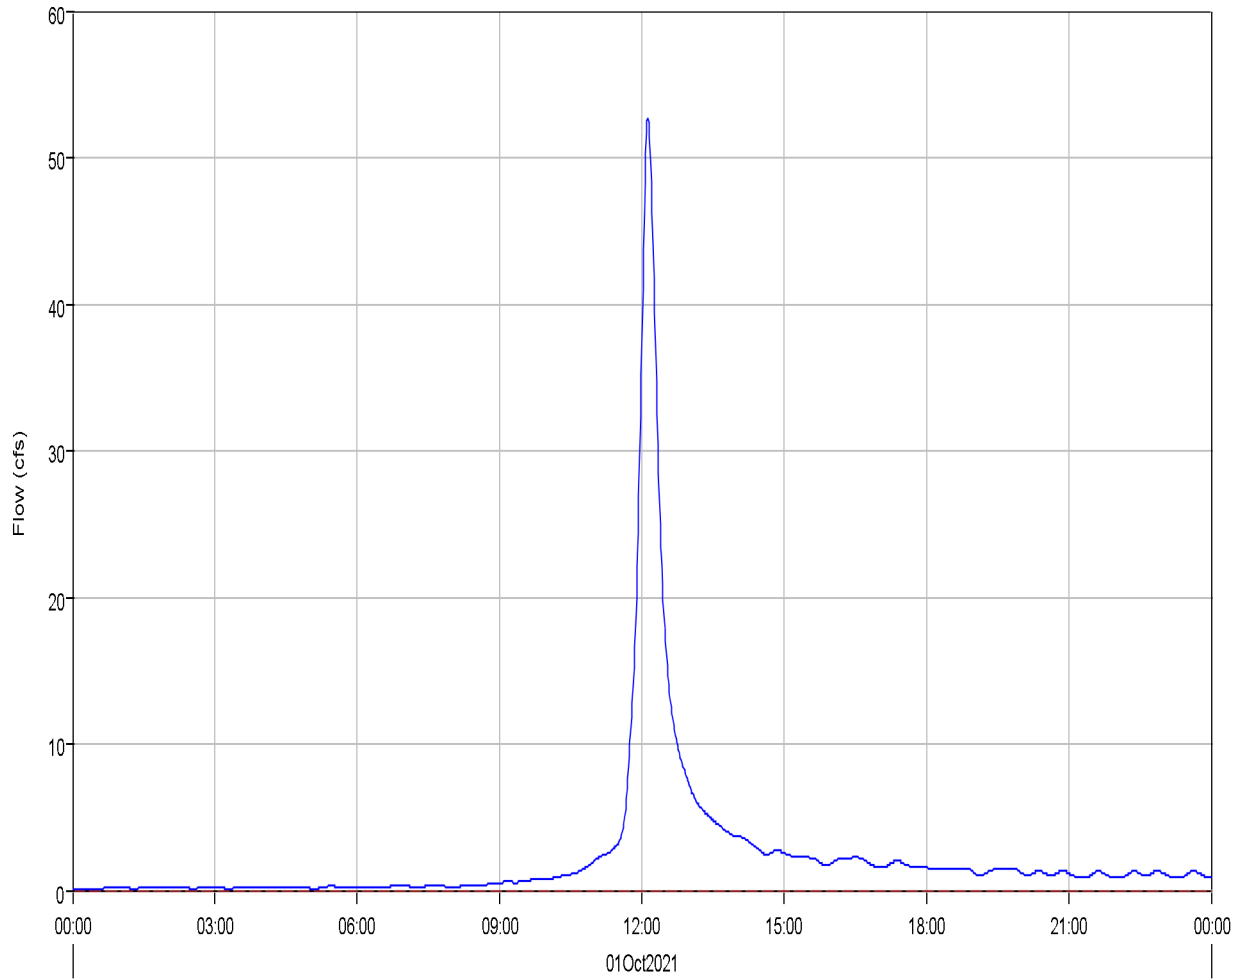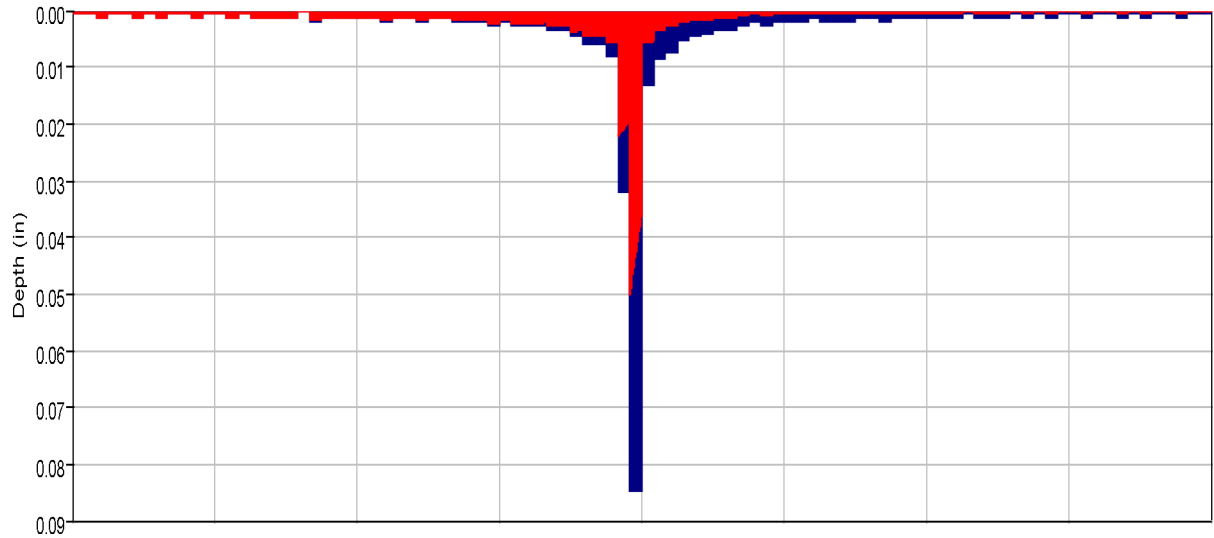

Run:EV 100-yr Ex. Type II Element:OB2 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB2 Result:Outflow

Run:EV 100-yr Ex. Type II Element:OB2 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB2 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB2



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	52.7 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	10.8 (AC-FT)	Total Direct Runoff :	4.7 (AC-FT)
Total Loss :	6.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	4.7 (AC-FT)	Discharge :	4.7 (AC-FT)

Subbasin "OB3" Results for Run "EV 100-yr Ex. Type II"

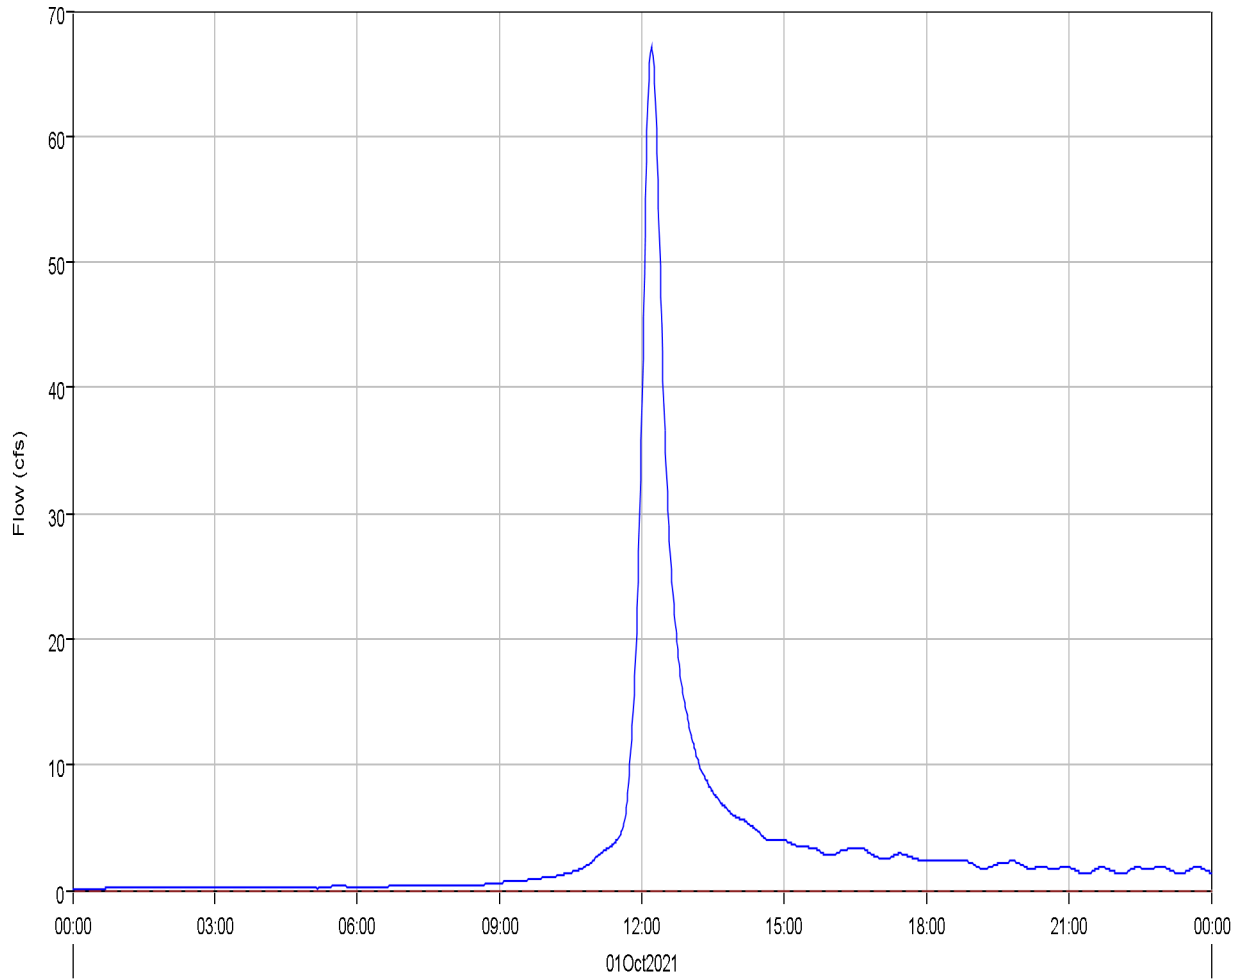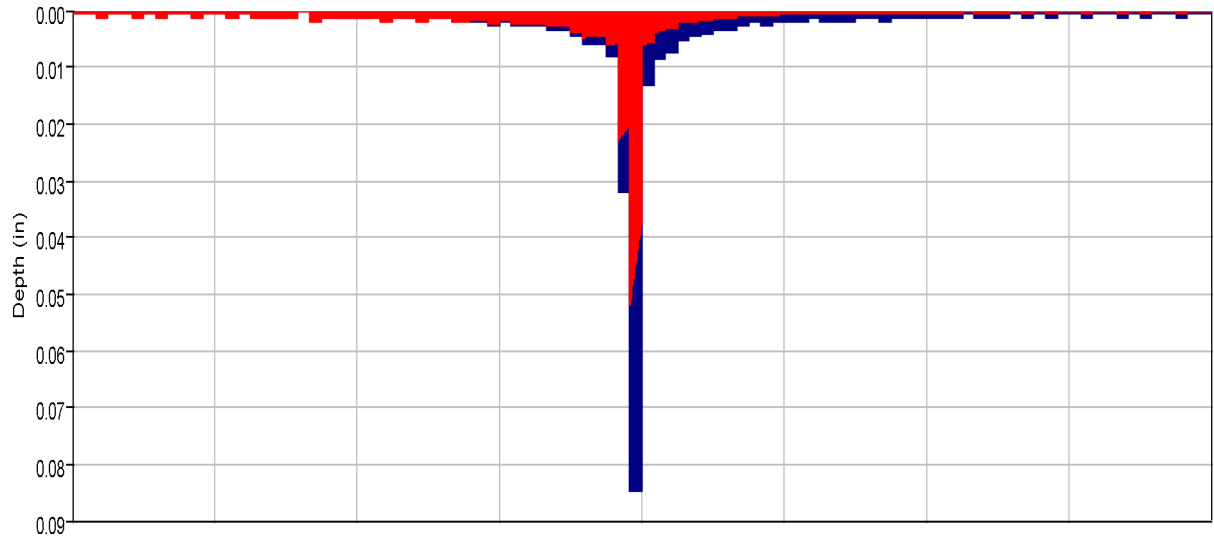

Run:EV 100-yr Ex. Type II Element:OB3 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB3 Result:Outflow

Run:EV 100-yr Ex. Type II Element:OB3 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB3 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	67.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:12
Total Precipitation :	16.7 (AC-FT)	Total Direct Runoff :	6.9 (AC-FT)
Total Loss :	9.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	7.0 (AC-FT)	Discharge :	6.9 (AC-FT)

Subbasin "OB4" Results for Run "EV 100-yr Ex. Type II"

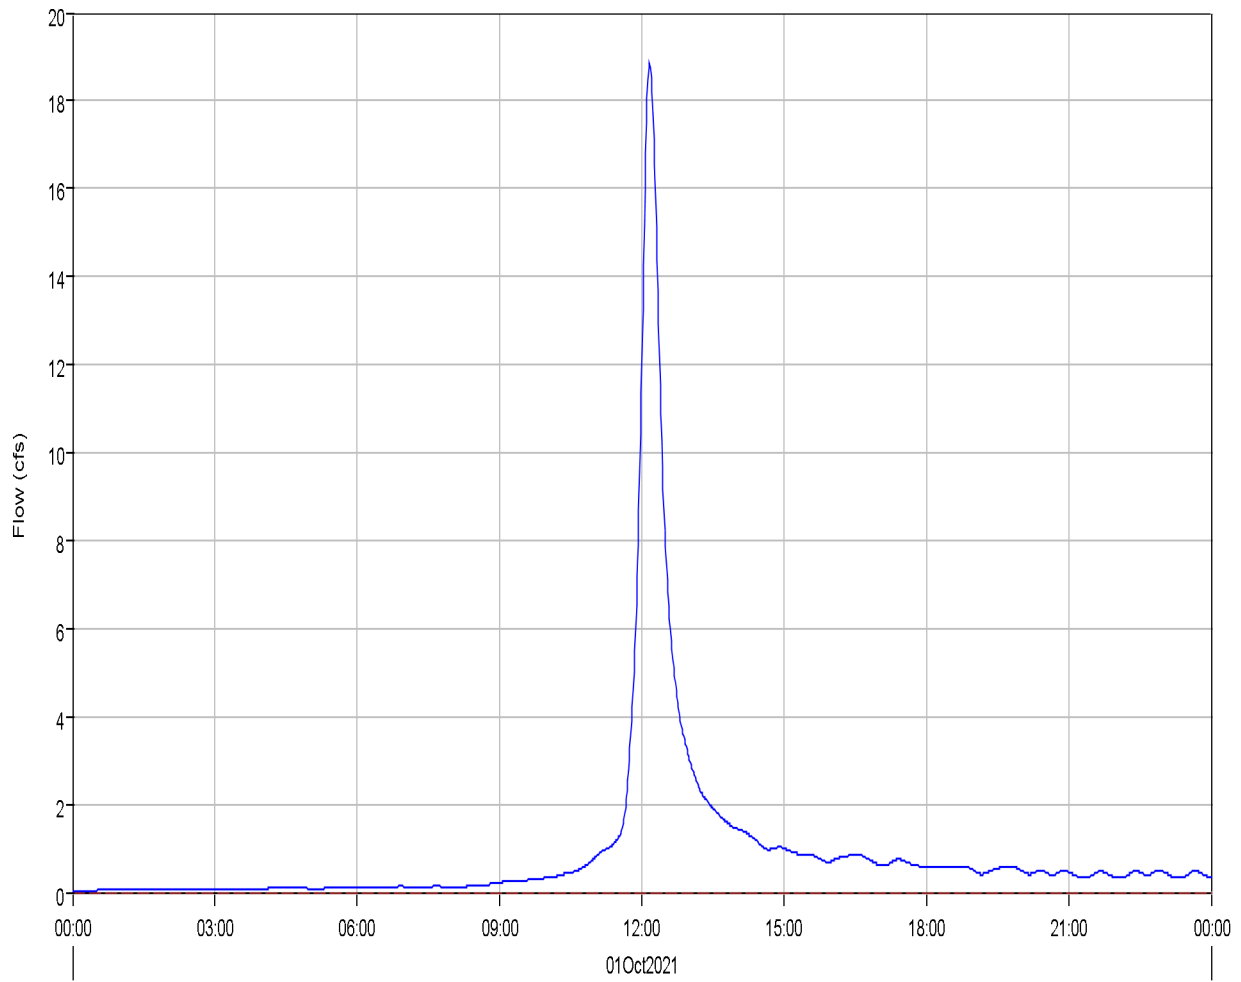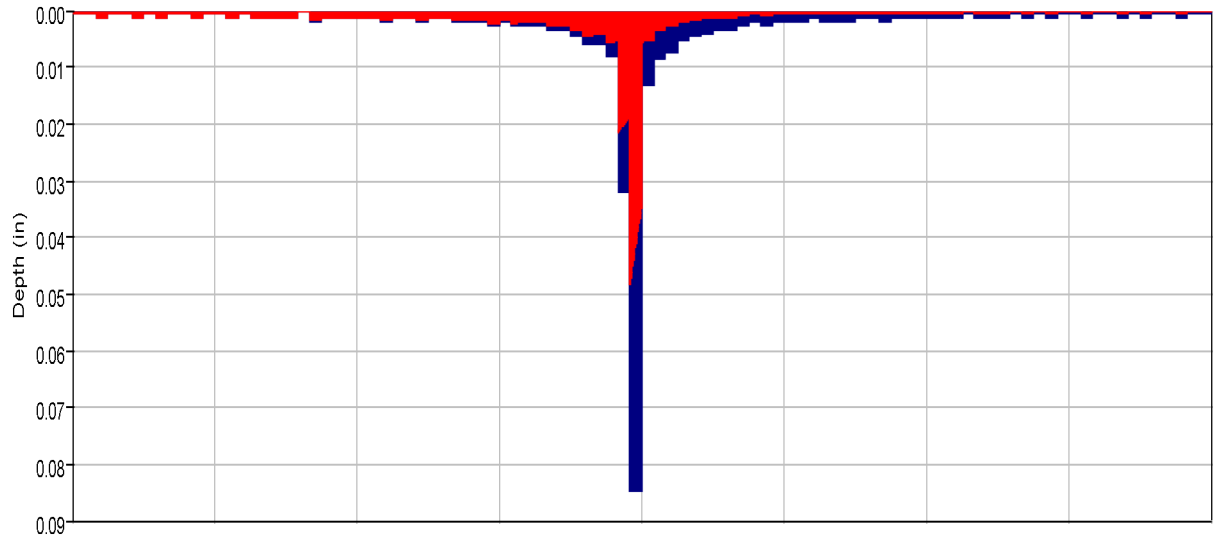

Run:EV 100-yr Ex. Type II Element:OB4 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB4 Result:Outflow


Run:EV 100-yr Ex. Type II Element:OB4 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB4 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm
Volume Units: AC-FT

Computed Results

Peak Discharge :	18.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	4.0 (AC-FT)	Total Direct Runoff :	1.8 (AC-FT)
Total Loss :	2.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.8 (AC-FT)	Discharge :	1.8 (AC-FT)

Subbasin "OB5" Results for Run "EV 100-yr Ex. Type II"

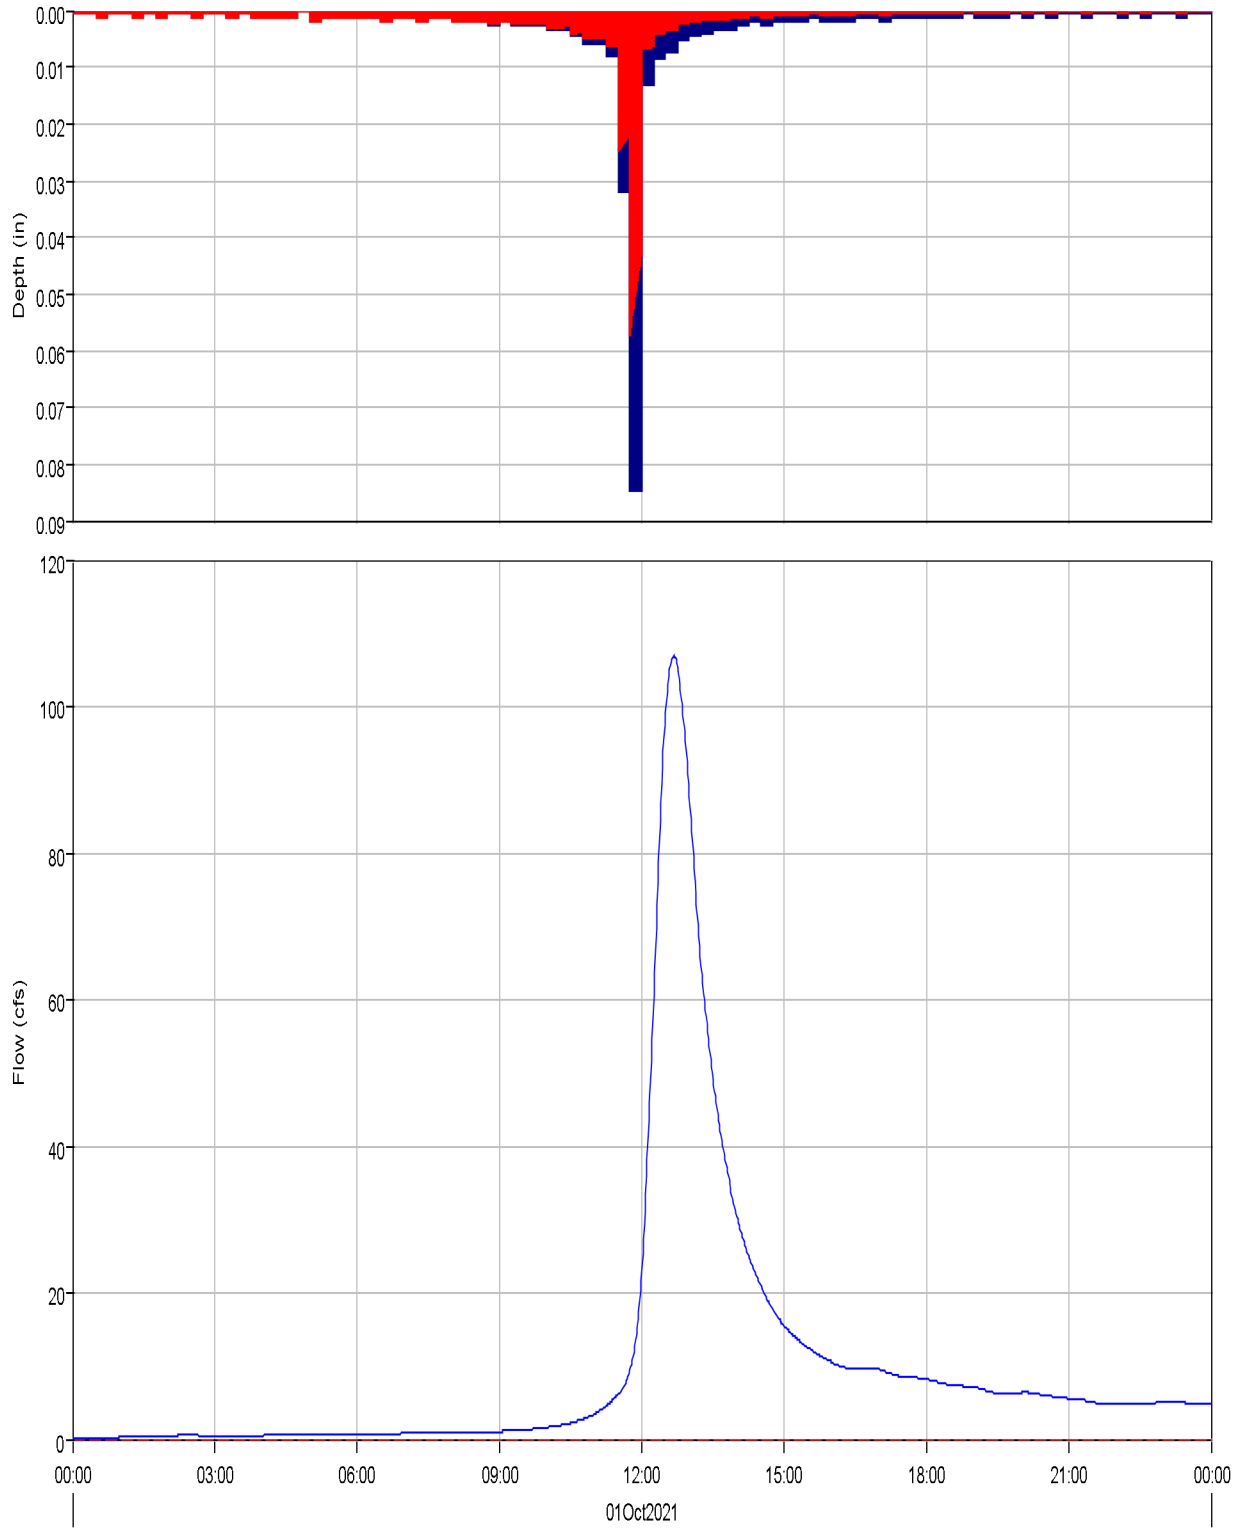

Run:EV 100-yr Ex. Type II Element:OB5 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB5 Result:Outflow

Run:EV 100-yr Ex. Type II Element:OB5 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB5 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB5


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	106.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:40
Total Precipitation :	55.1 (AC-FT)	Total Direct Runoff :	19.7 (AC-FT)
Total Loss :	35.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	20.1 (AC-FT)	Discharge :	19.7 (AC-FT)

Subbasin "OB6" Results for Run "EV 100-yr Ex. Type II"

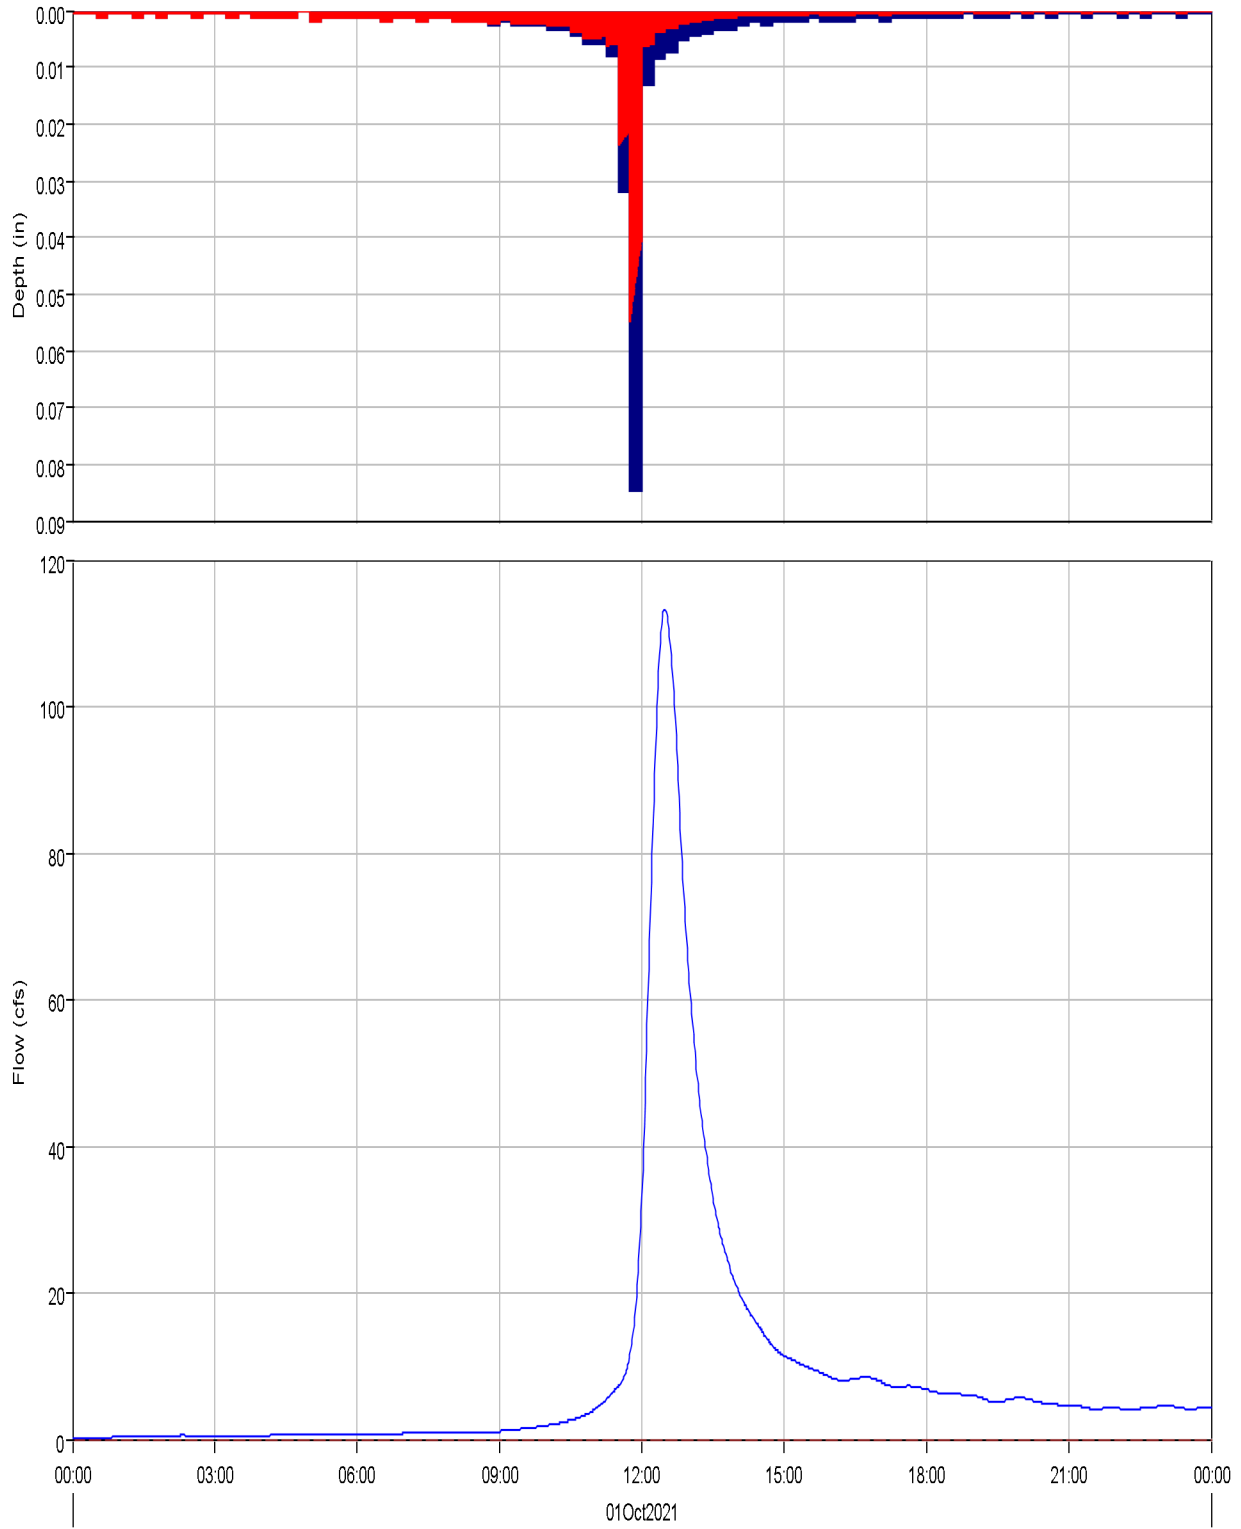

Run:EV 100-yr Ex. Type II Element:OB6 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB6 Result:Outflow

Run:EV 100-yr Ex. Type II Element:OB6 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB6 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB6


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	113.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:29
Total Precipitation :	45.4 (AC-FT)	Total Direct Runoff :	17.5 (AC-FT)
Total Loss :	27.6 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	17.8 (AC-FT)	Discharge :	17.5 (AC-FT)

Subbasin "OB7" Results for Run "EV 100-yr Ex. Type II"

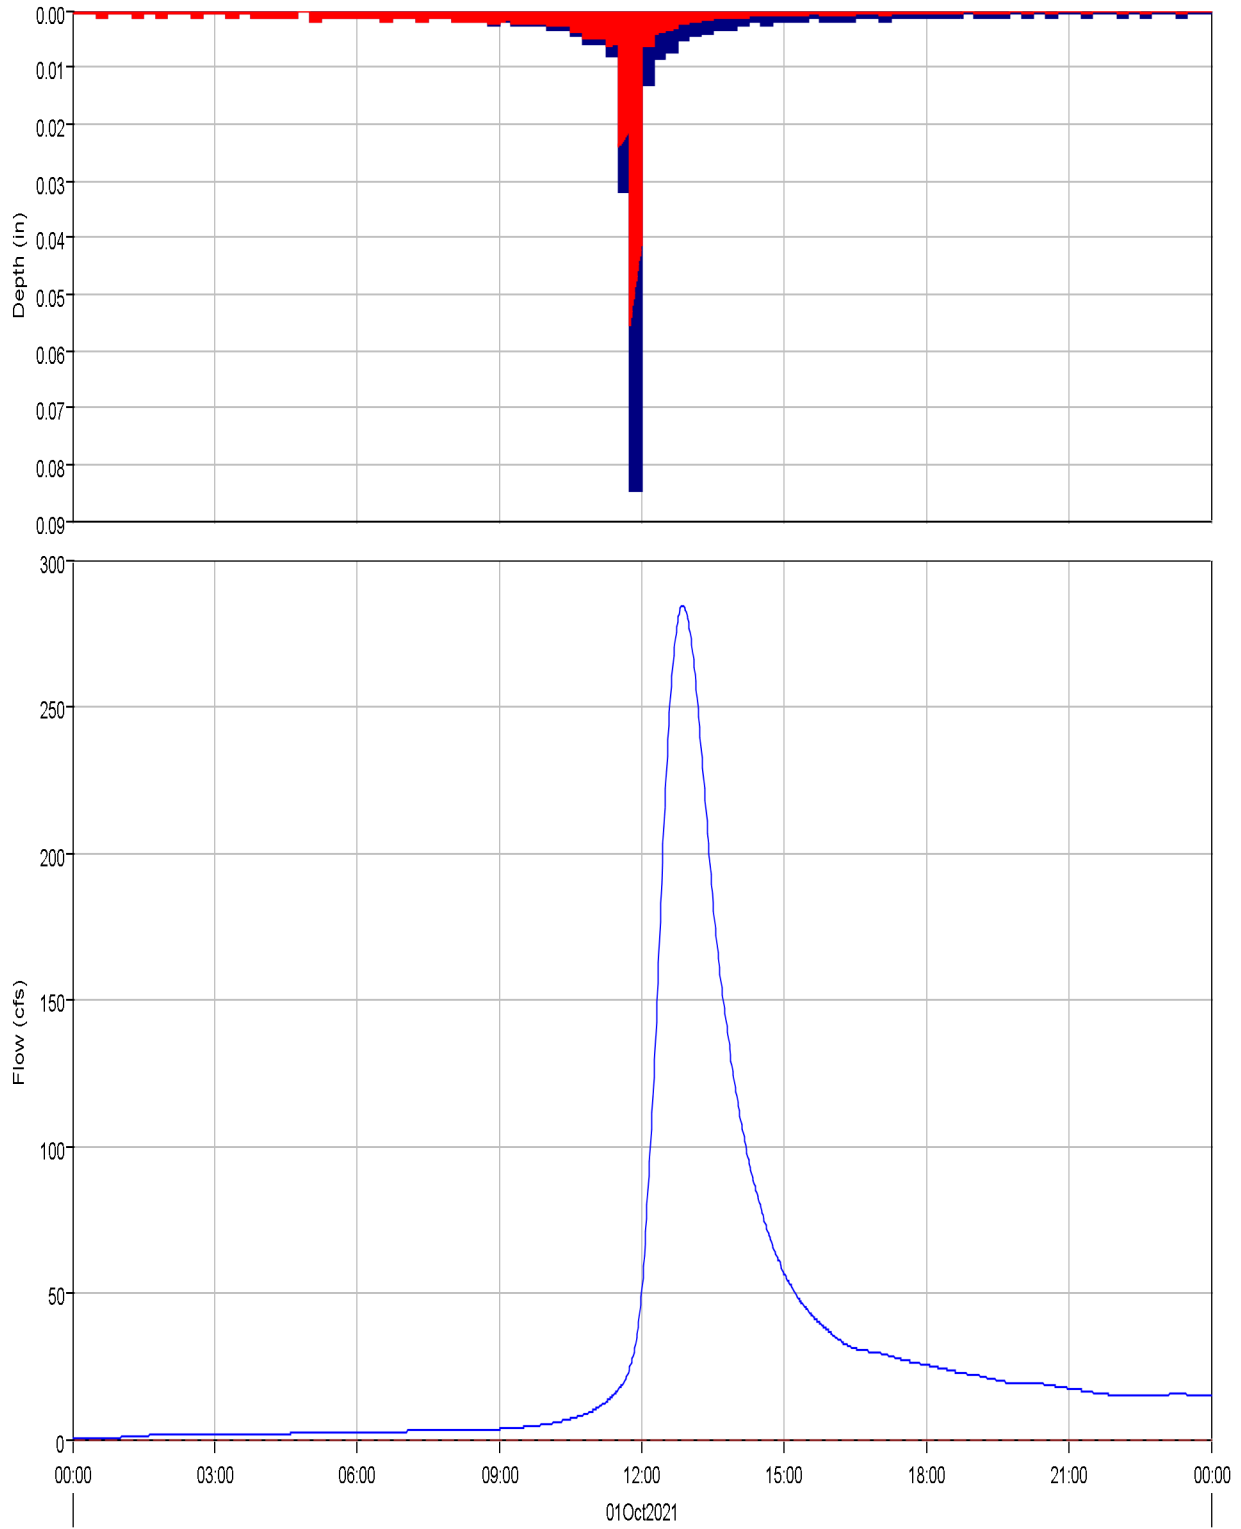

Run:EV 100-yr Ex. Type II Element:OB7 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB7 Result:Outflow

Run:EV 100-yr Ex. Type II Element:OB7 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB7 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB7



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	284.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:52
Total Precipitation :	161.5 (AC-FT)	Total Direct Runoff :	60.6 (AC-FT)
Total Loss :	99.5 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	62.0 (AC-FT)	Discharge :	60.6 (AC-FT)

Subbasin "OB8" Results for Run "EV 100-yr Ex. Type II"

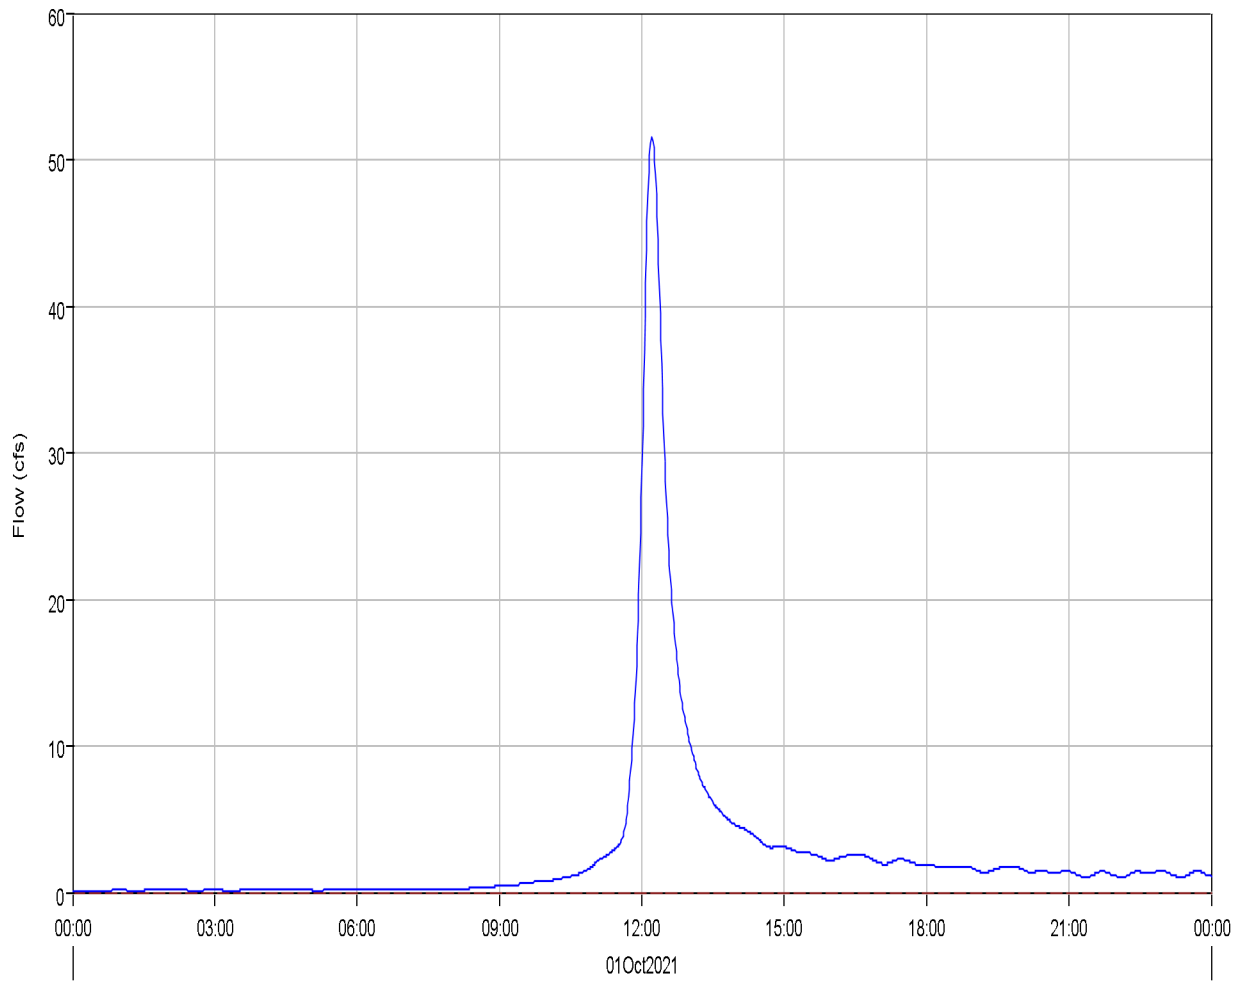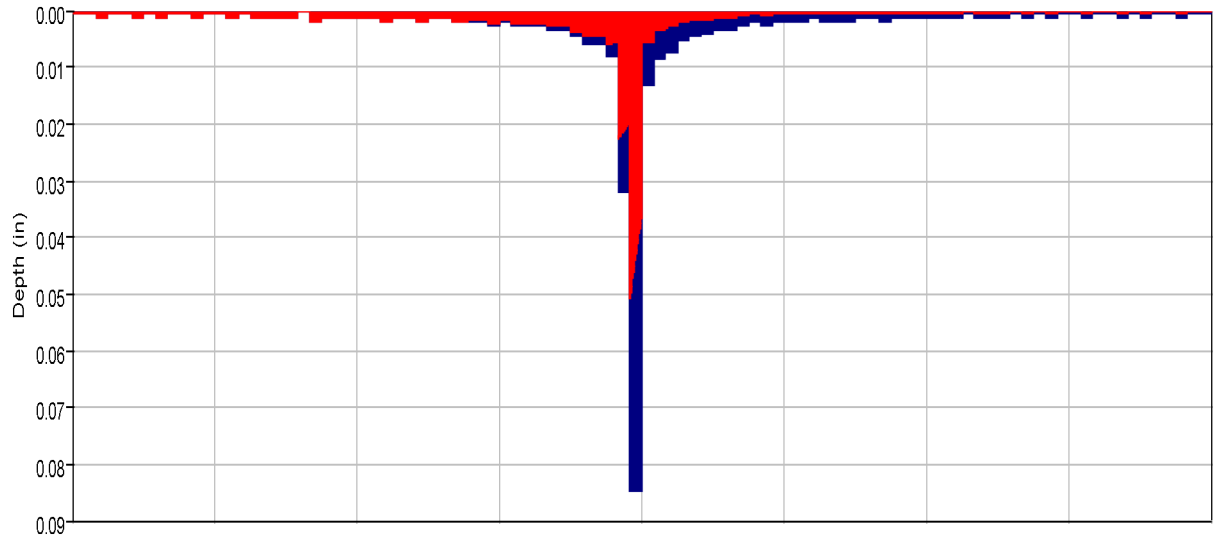

Run:EV 100-yr Ex. Type II Element:OB8 Result:Precipitation
Run:EV 100-yr Ex. Type II Element:OB8 Result:Outflow


Run:EV 100-yr Ex. Type II Element:OB8 Result:Precipitation Loss
Run:EV 100-yr Ex. Type II Element:OB8 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Subbasin: OB8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm
Volume Units: AC-FT

Computed Results

Peak Discharge :	51.6 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	12.7 (AC-FT)	Total Direct Runoff :	5.4 (AC-FT)
Total Loss :	7.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	5.4 (AC-FT)	Discharge :	5.4 (AC-FT)

Reach 'R-B1' Results for Run 'EV 100-yr Ex. Type II'

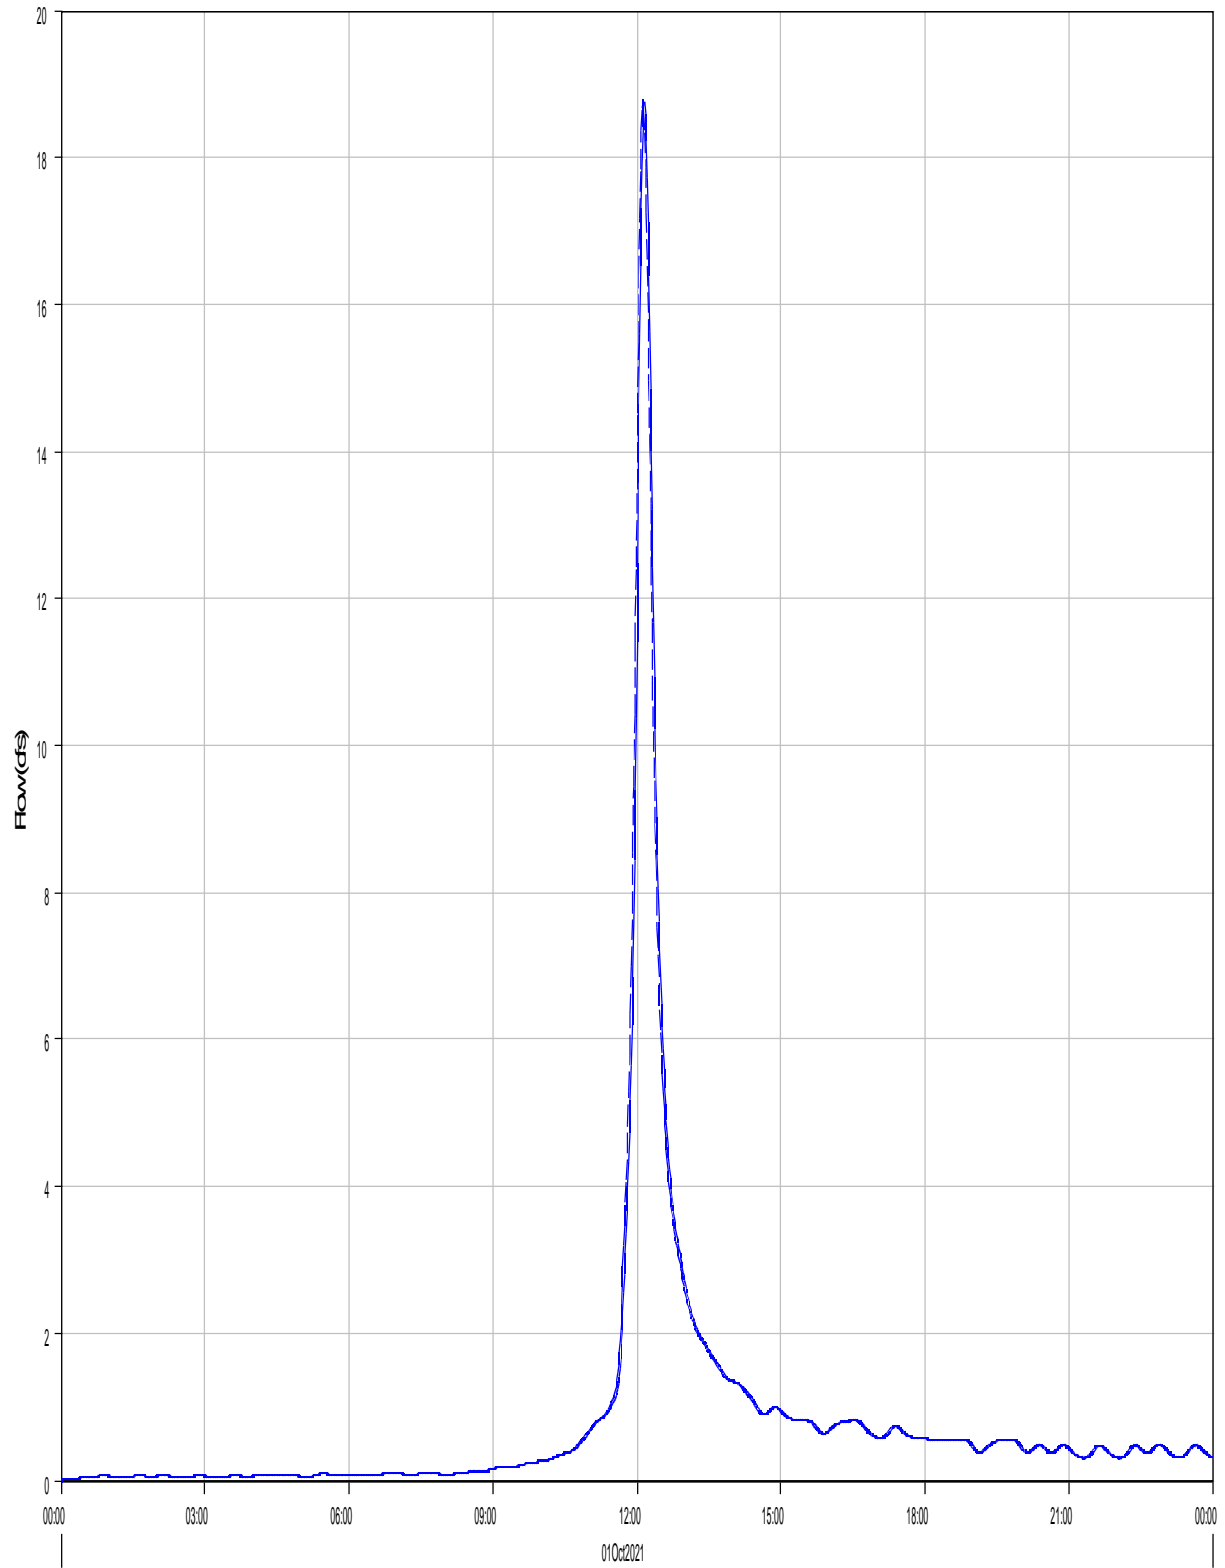

Run:EV 100-yr Ex. Type II Element:R-B1 Result:Outflow

Run:EV 100-yr Ex. Type II Element:R-B1 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Reach: R-B1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	18.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	18.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:10
Total Inflow :	1.7 (AC-FT)	Total Outflow :	1.7 (AC-FT)

Reach 'R-OB4' Results for Run 'EV 100-yr Ex. Type II'

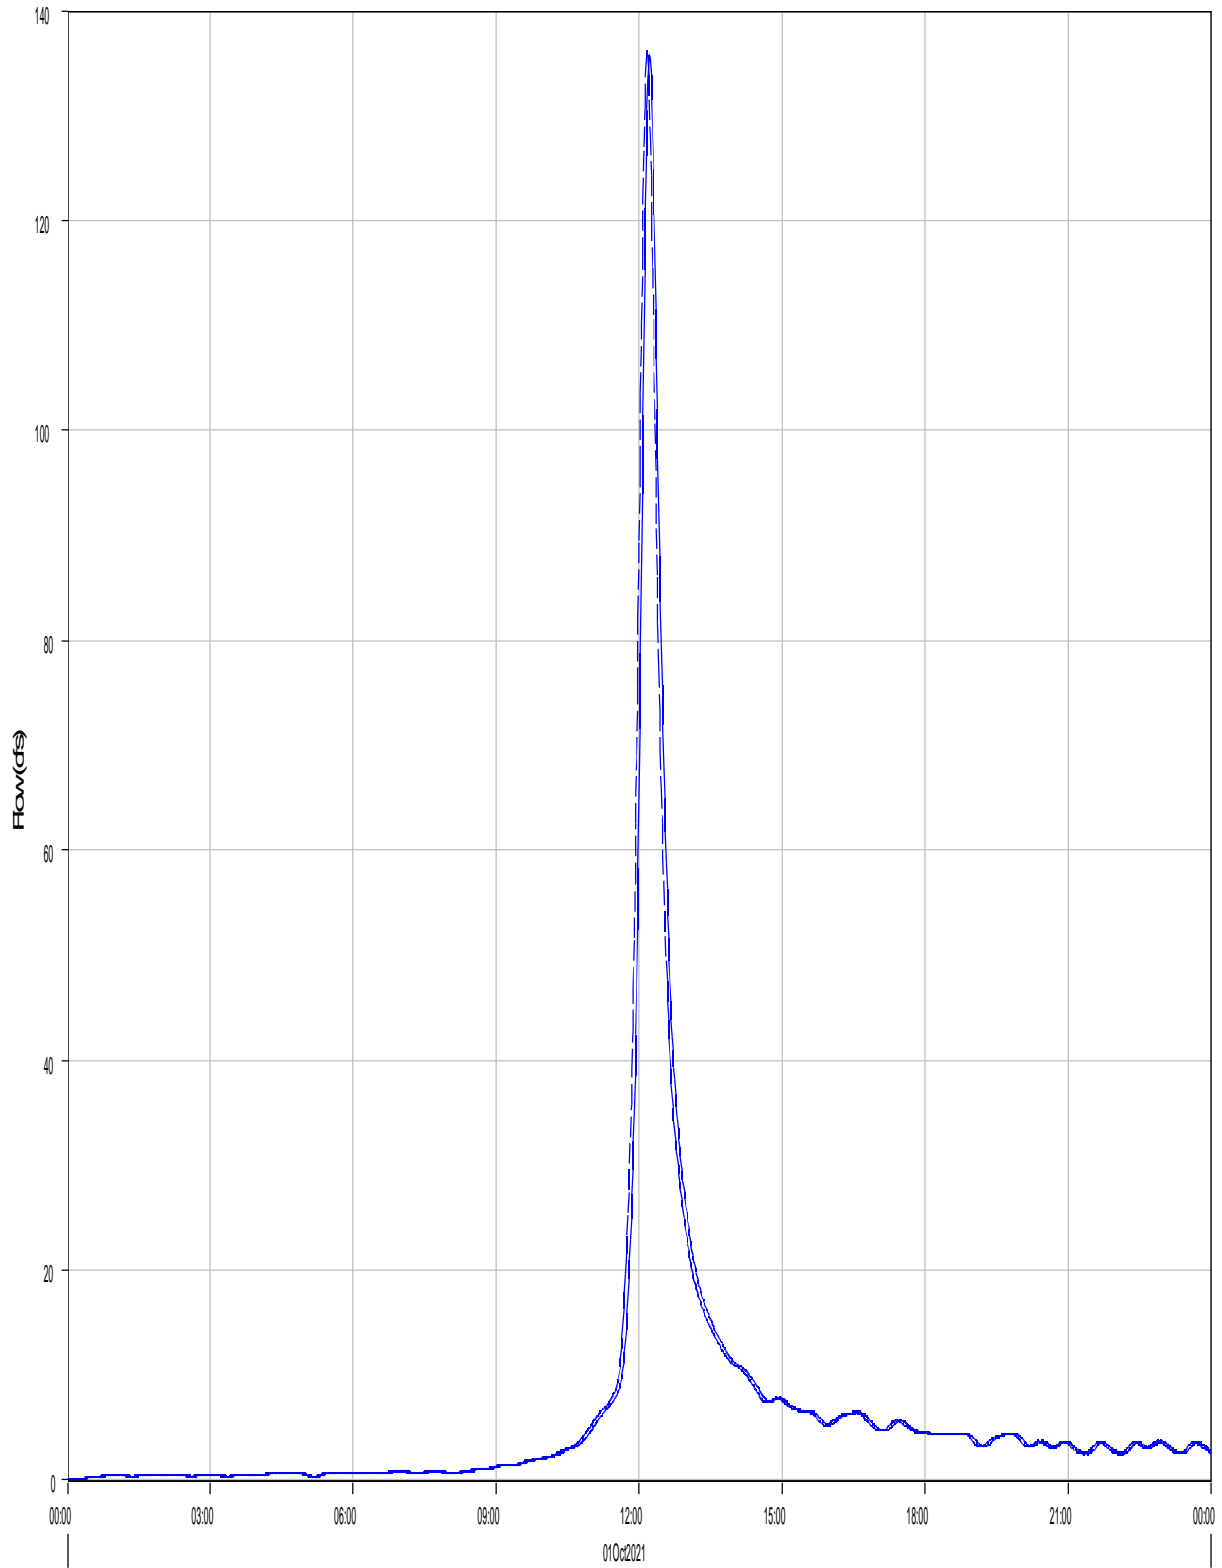

Run:EV 100-yr Ex. Type II Element:R-OB4 Result:Outflow

Run:EV 100-yr Ex. Type II Element:R-OB4 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Reach: R-OB4


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	136.1 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:10
Peak Outflow :	135.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	13.5 (AC-FT)	Total Outflow :	13.4 (AC-FT)

Reach 'R-CBS' Results for Run 'EV 100-yr Ex. Type II'

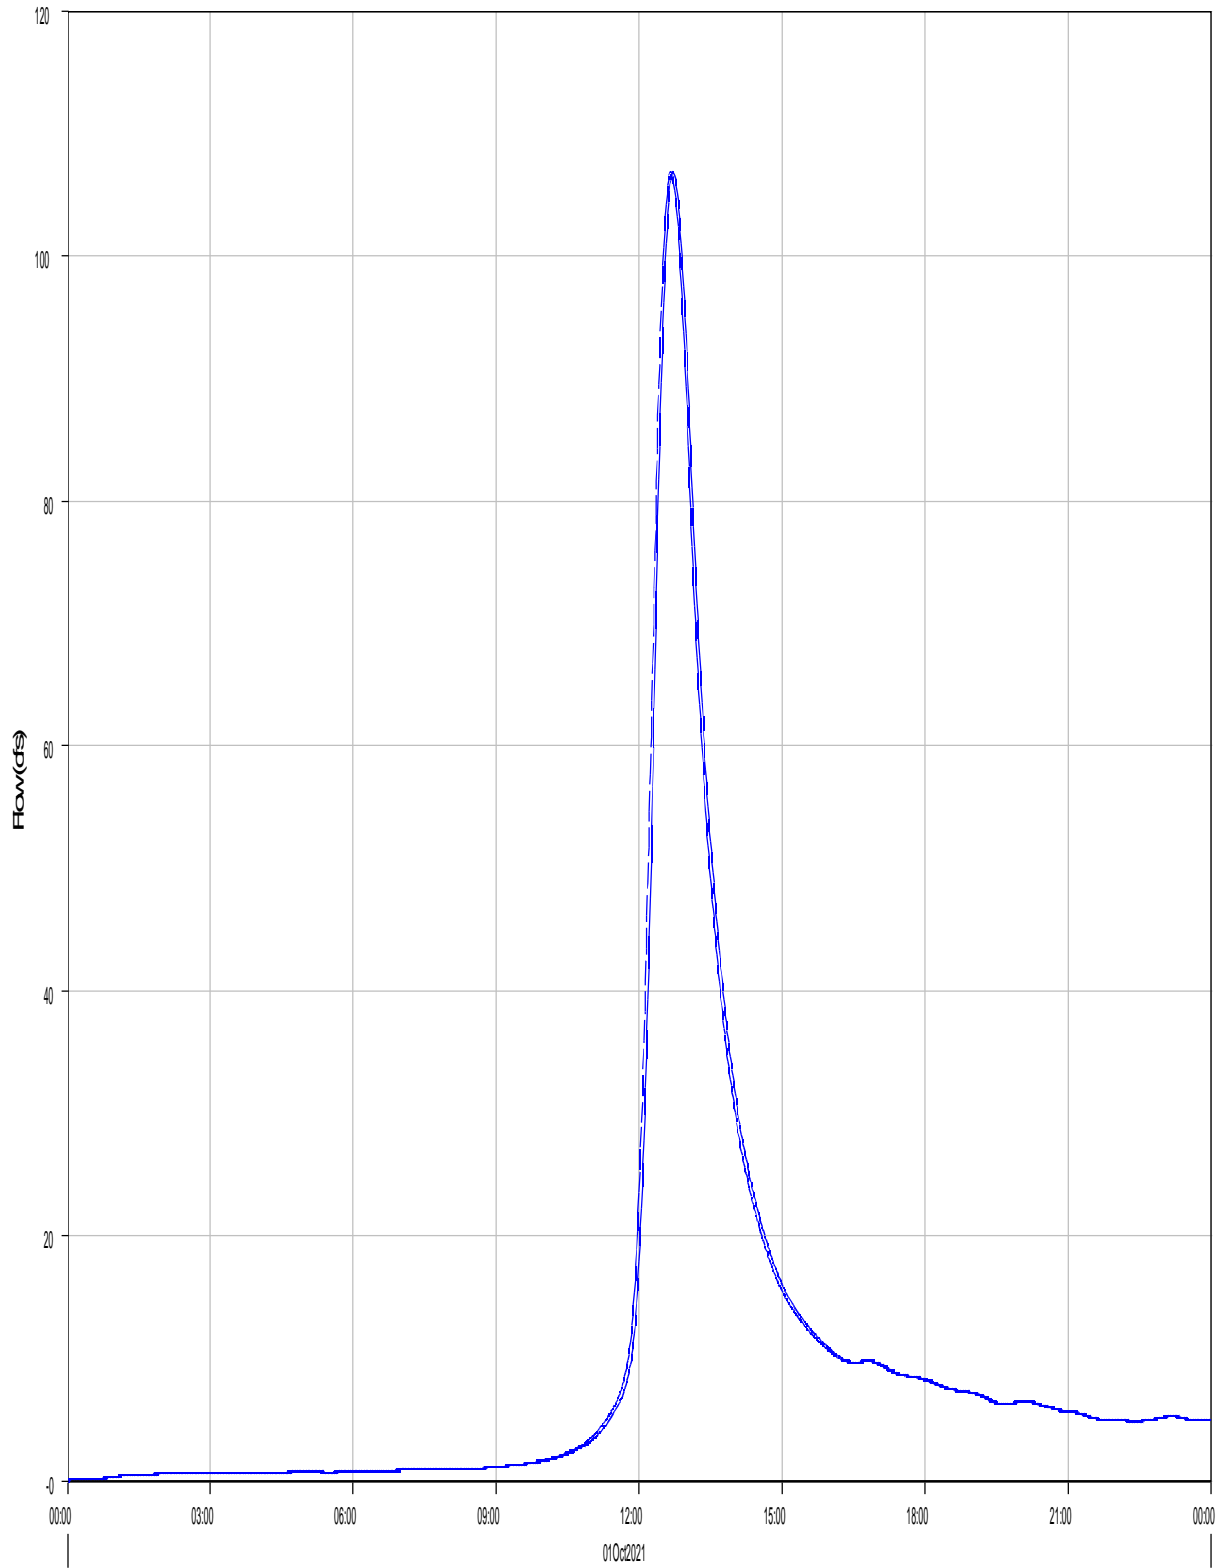

Run:EV 100-yr Ex. Type II Element:R-CBS Result:Outflow

Run:EV 100-yr Ex. Type II Element:R-CBS Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Reach: R-OB5


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	106.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:40
Peak Outflow :	106.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:43
Total Inflow :	19.7 (AC-FT)	Total Outflow :	19.7 (AC-FT)

Reach 'R-OB6' Results for Run 'EV 100-yr Ex. Type II'

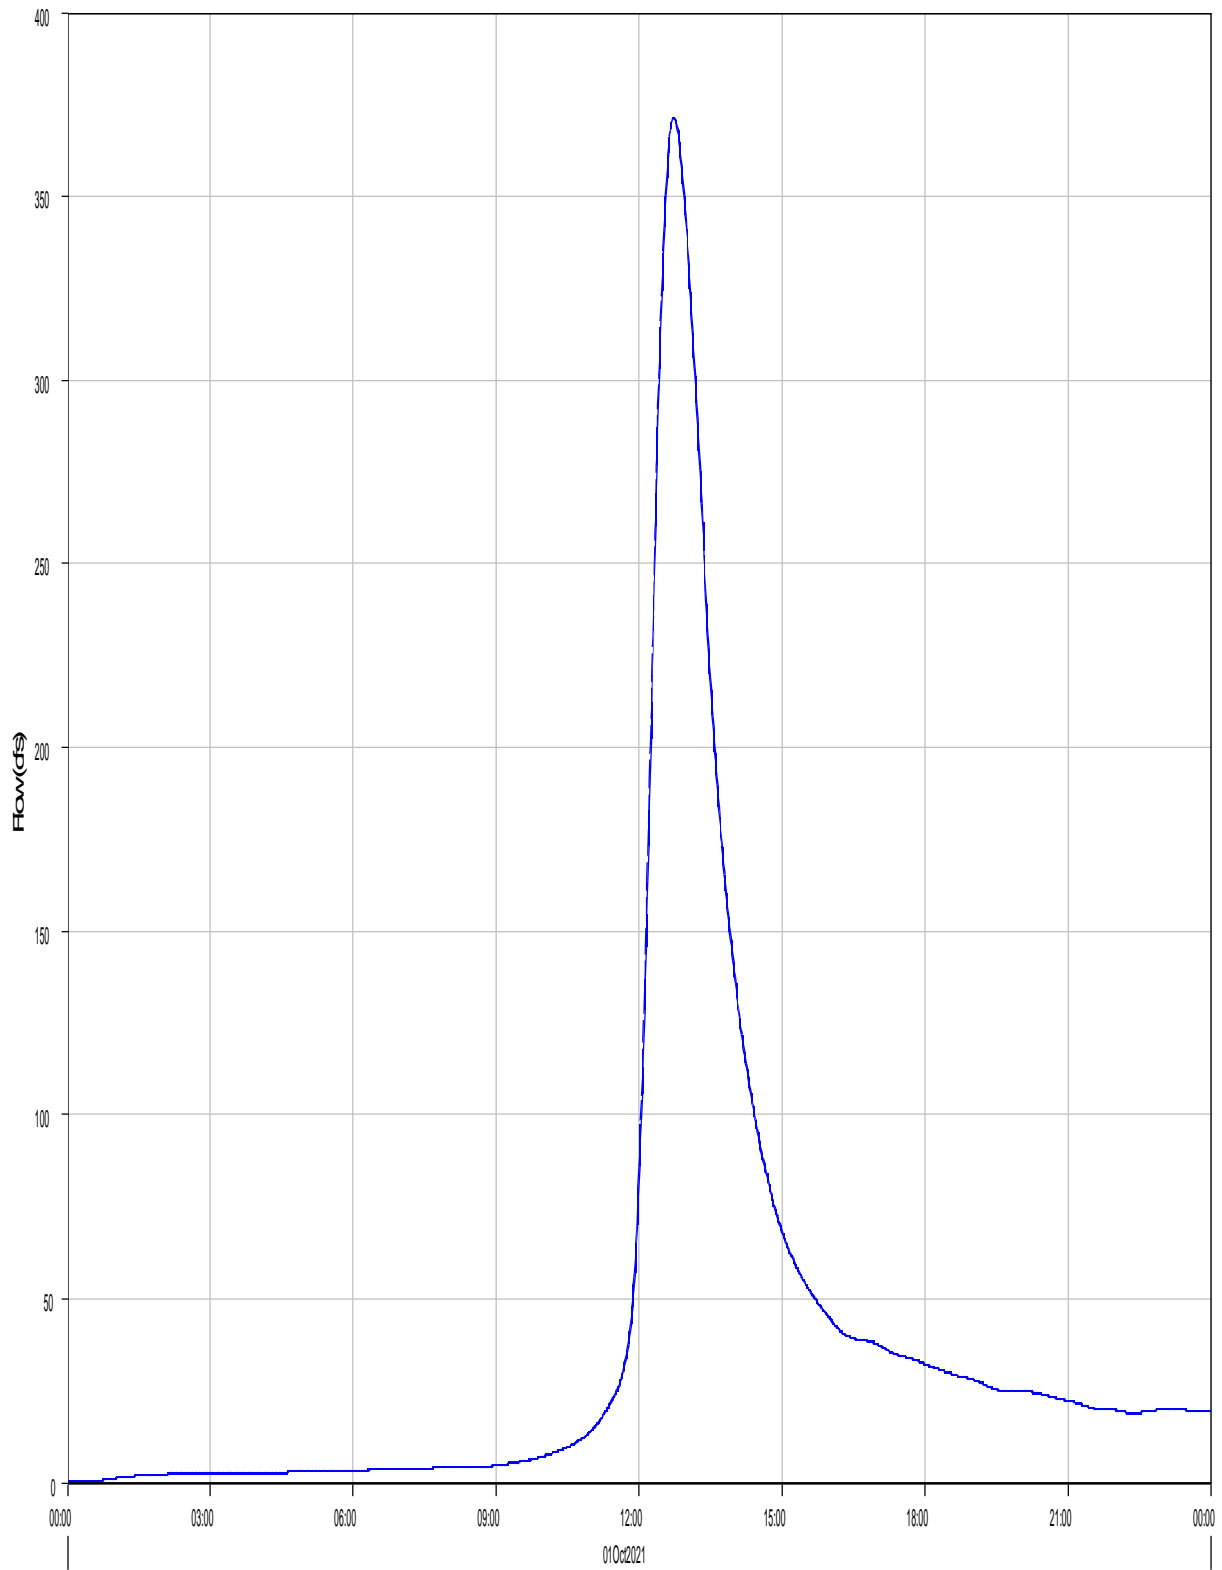

Run:EV 100-yr Ex. Type II Element:R-OB6 Result:Outflow

Run:EV 100-yr Ex. Type II Element:R-OB6 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Reach: R-OB6


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	371.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:43
Peak Outflow :	371.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:44
Total Inflow :	78.1 (AC-FT)	Total Outflow :	78.1 (AC-FT)

Reach 'R-OB7' Results for Run 'EV 100-yr Ex. Type II'

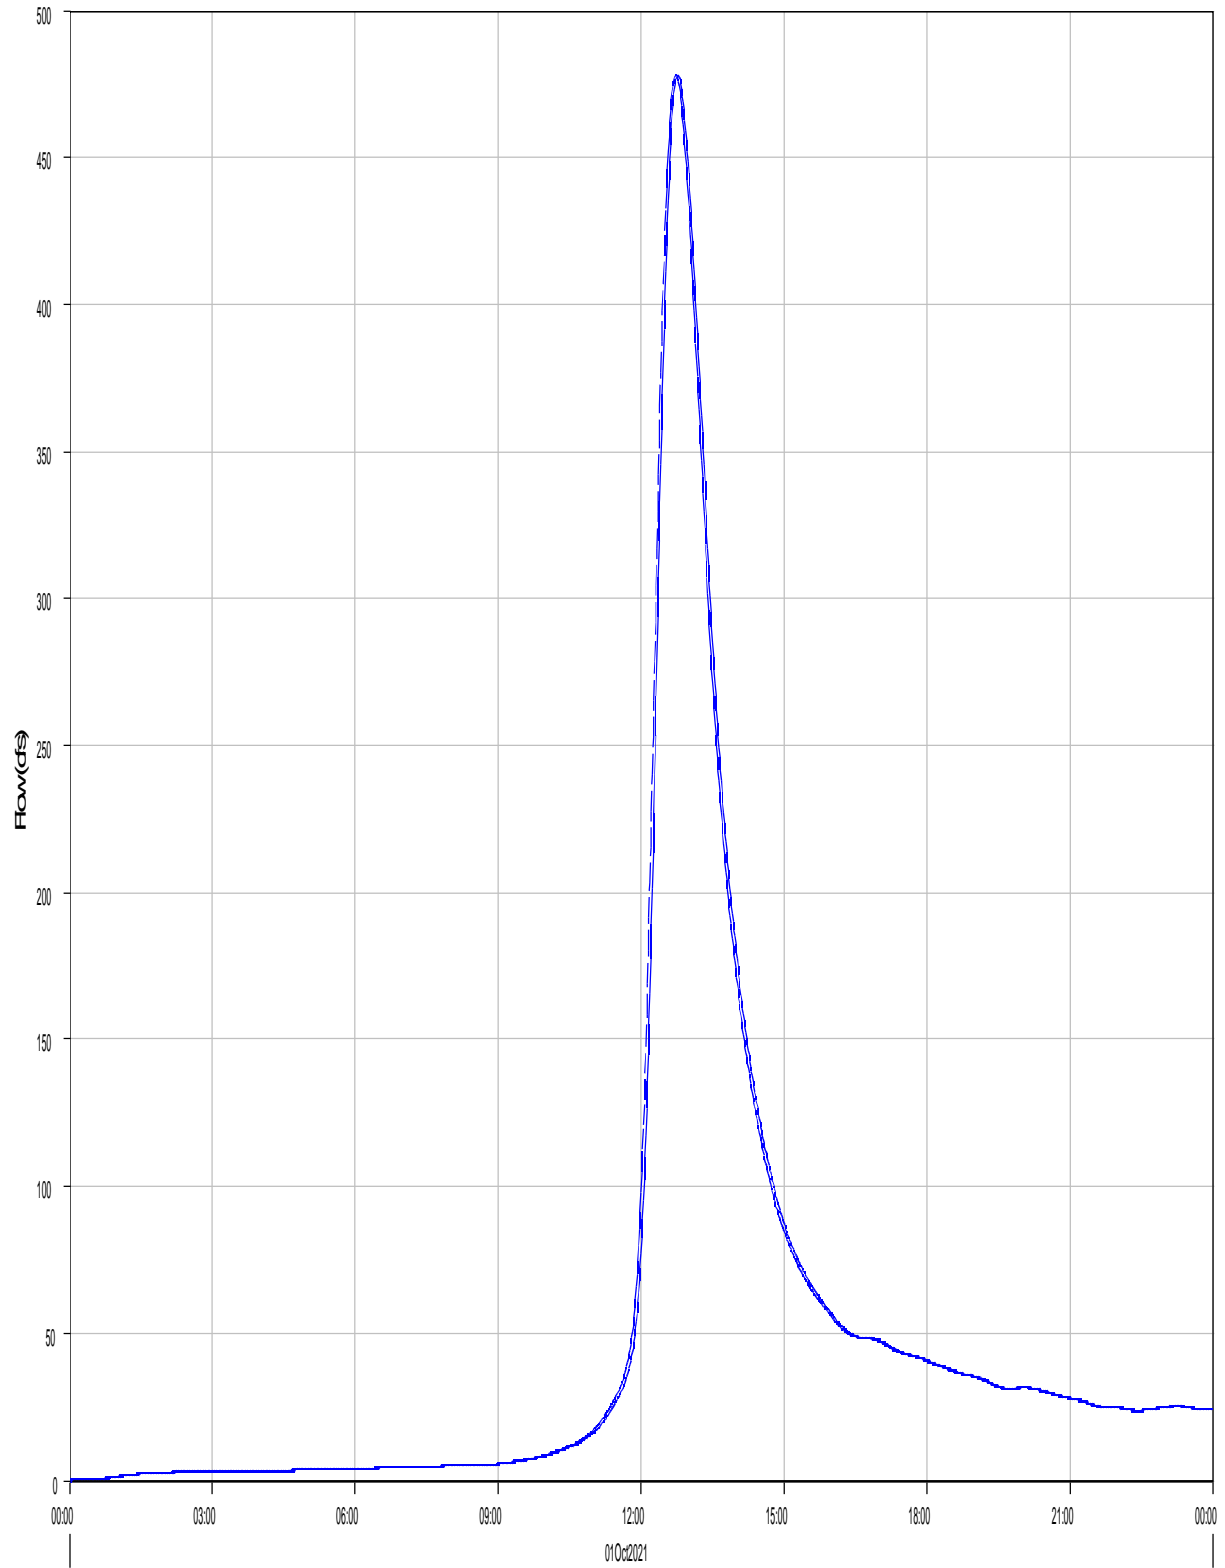

Run:EV 100-yr Ex. Type II Element:R-OB7 Result:Outflow

Run:EV 100-yr Ex. Type II Element:R-OB7 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Reach: R-OB7


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	478.0 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:44
Peak Outflow :	477.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:46
Total Inflow :	97.8 (AC-FT)	Total Outflow :	97.7 (AC-FT)

Reach 'R-CB8' Results for Run 'EV 100-yr Ex. Type II'

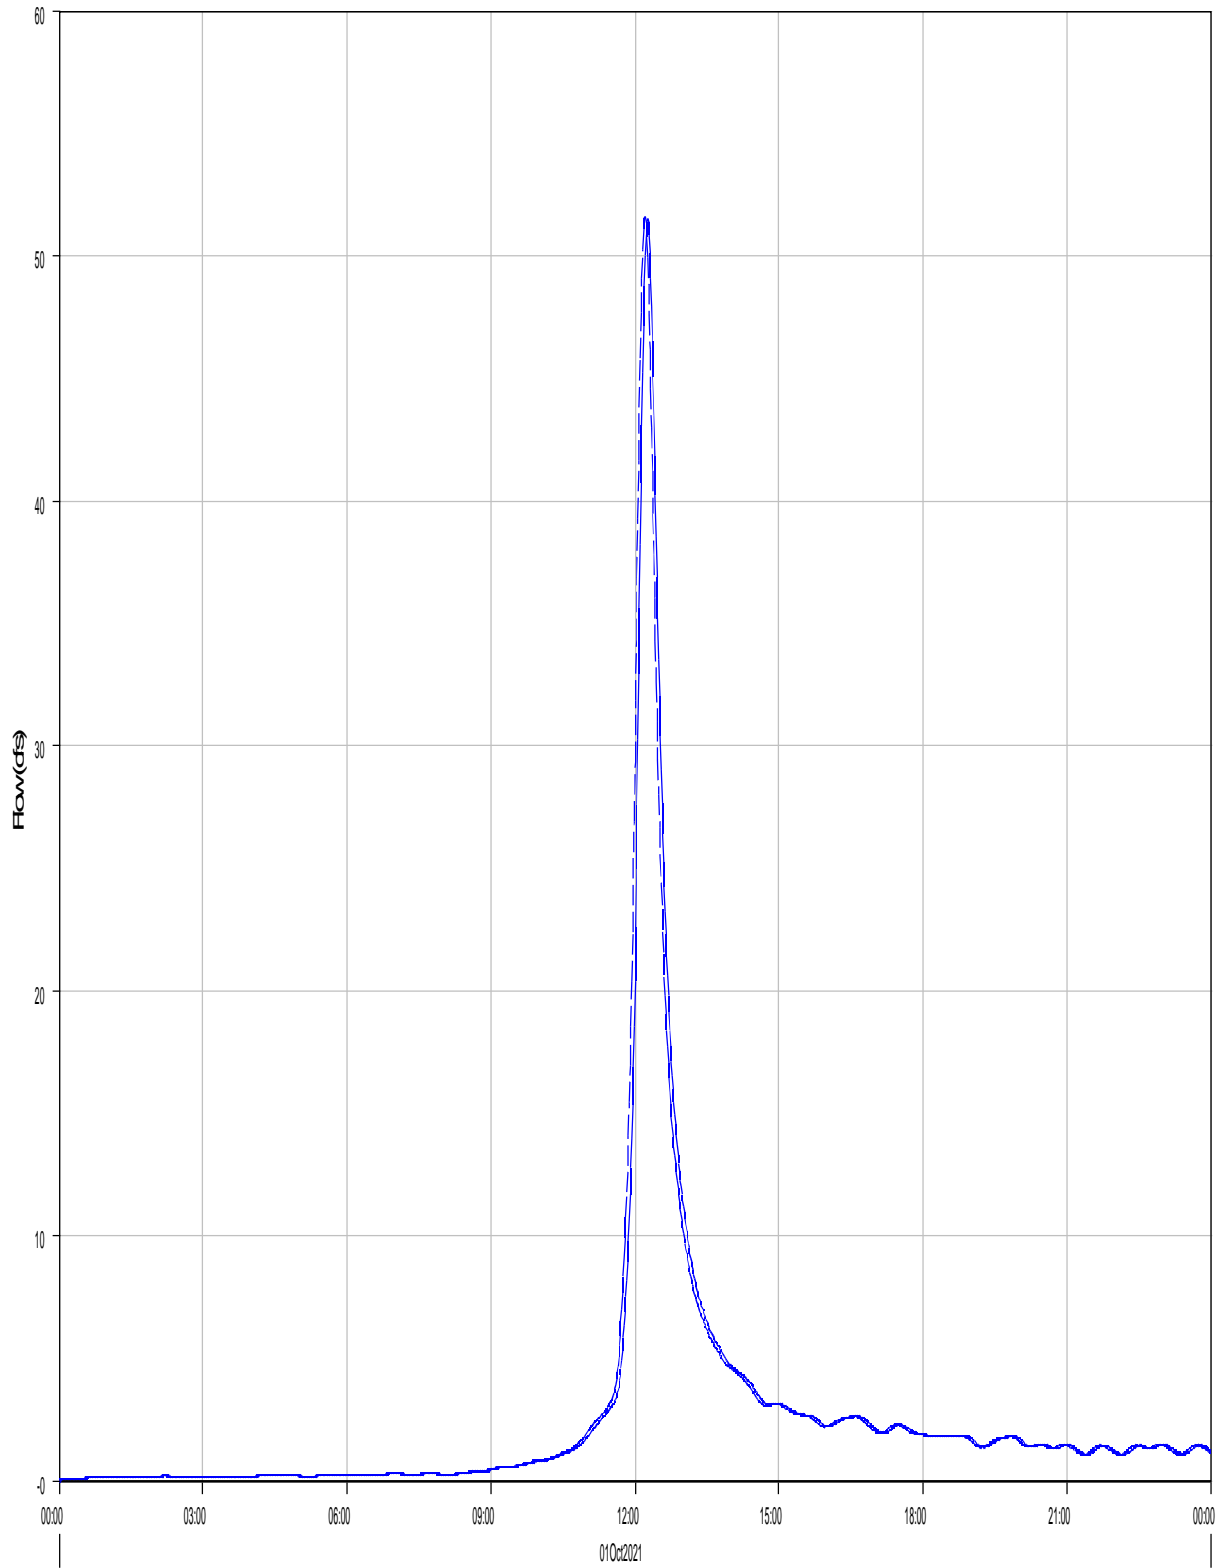

Run:EV 100-yr Ex. Type II Element:R-CB8 Result:Outflow

Run:EV 100-yr Ex. Type II Element:R-CB8 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Ex. Type II Reach: R-OB8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Existing
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 11Mar2022, 10:12:01 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	51.6 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	51.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:16
Total Inflow :	5.4 (AC-FT)	Total Outflow :	5.4 (AC-FT)




HEC-HMS

Project : Eagleview_Subdivision

Basin Model : Eagleview_Proposed

Mar 16 08:36:57 MDT 2022

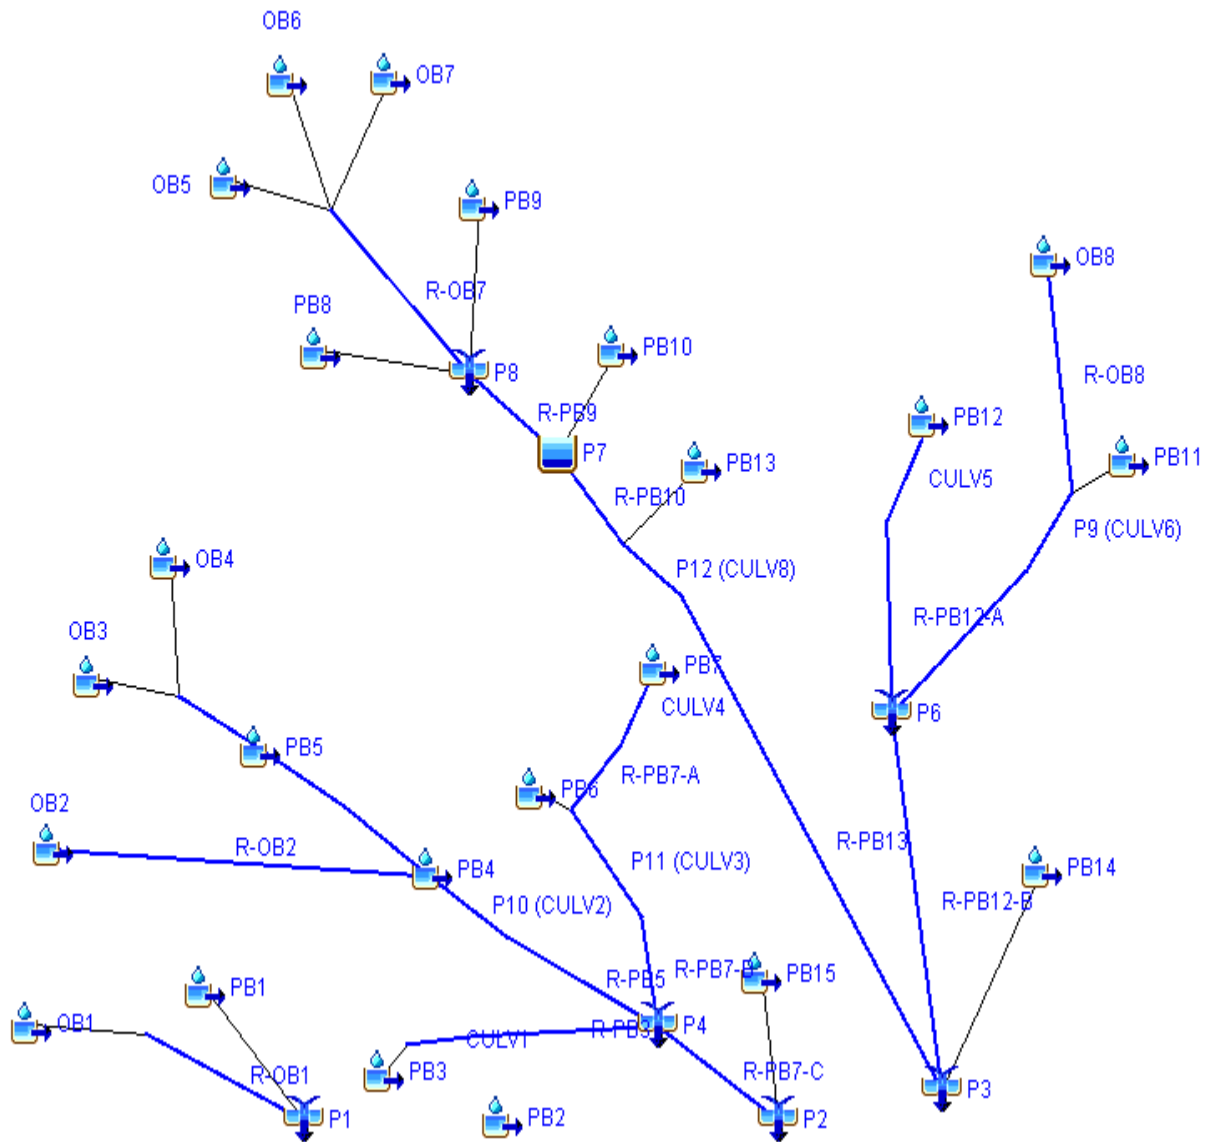

Post Runoff Analysis
Time of Concentration

Project Information

Project Name: Eagleview
 KHA Project #: 19628800
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Minimum Time of Concentration 5.0 minutes
 2YR-24HR Rainfall, P2 2.10

Post-Development												
Drainage Area: OB1												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.073	0.15	2.10						17.35	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	1118.00	0.038			U				3.14	5.93	
Post-Development Time of Concentration, OB1											23.28	13.97

Post-Development												
Drainage Area: OB2												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.063	0.15	2.10						19.41	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	554.00	0.046			U				3.45	2.67	
CHANNEL	T2 CHANNEL FLOW	841.00	0.029	0.05		U	9.50	6.60	1.44	6.45	2.17	
Post-Development Time of Concentration, OB2											23.26	13.95

Post-Development												
Drainage Area: OB3												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.074	0.15	2.10						17.26	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	2436.00	0.034			U				2.97	13.65	
Post-Development Time of Concentration, OB3											30.91	18.55

Post-Development												
Drainage Area: OB4												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.043	0.15	2.10						21.65	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	793.00	0.038			U				3.16	4.13	
CHANNEL	T2 CHANNEL FLOW	577.00	0.028	0.05		U	9.50	6.60	1.44	6.36	1.51	
Post-Development Time of Concentration, OB4											27.29	16.38

Post-Development												
Drainage Area: OB5												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.037	0.40	2.10						49.91	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	838.00	0.033			U				2.93	21.83	
CHANNEL	T2 CHANNEL FLOW	1407.00	0.024	0.04		U	9.50	6.60	1.44	7.36	3.19	
Post-Development Time of Concentration, OB5											74.93	44.96

Post-Development												
Drainage Area: OB6												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.064	0.40	2.10						40.09	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	2569.00	0.038			U				3.14	13.62	
CHANNEL	T2 CHANNEL FLOW	2110.00	0.027	0.04		U	9.50	6.60	1.44	7.73	4.56	
Post-Development Time of Concentration, OB6											58.25	34.95

Post-Development												
Drainage Area: OB7												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.028	0.40	2.10						55.80	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	2068.00	0.036			U				3.06	11.28	
CHANNEL	T2 CHANNEL FLOW	6198.00	0.03	0.04		U	12.00	22.00	0.55	4.09	25.29	
Post-Development Time of Concentration, OB7											92.35	55.41

Post-Development												
Drainage Area: OB8												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.029	0.15	2.10						25.10	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	1117.00	0.043			U				3.34	5.57	
CHANNEL	T2 CHANNEL FLOW	762.00	0.033	0.03		U	9.50	6.60	1.44	11.43	1.11	
Post-Development Time of Concentration, OB8											31.78	19.07

Post-Development												
Drainage Area: PB1												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.033	0.15	2.10						23.84	
SHALLOW CONCENTRATED	T3 SHALLOW CONCENTRATED FLOW	400.00	0.041			U				3.27	2.04	
Post-Development Time of Concentration, PB1											25.88	15.53

Post-Development												
Drainage Area: PB2												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	227.00	0.033	0.15	2.10						19.07	
Post-Development Time of Concentration, PB2											19.07	11.44

Post-Development												
Drainage Area: PB3												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	313.00	0.05	0.15	2.10						21.99	
CHANNEL	T3 CHANNEL FLOW	315.00	0.02	0.03		U	9.00	12.40	0.73	6.08	0.86	
Post-Development Time of Concentration, PB3											22.46	13.47

Post-Development												
Drainage Area: PB4												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
MINIMUM TC	T2 MINIMUM TC FLOW										5.00	
Post-Development Time of Concentration, PB4											5.00	3.00

Post Runoff Analysis
Time of Concentration

Project Information

Project Name: Eagleview
 KHA Project #: 19628800
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Minimum Time of Concentration 5.0 minutes
 2YR-24HR Rainfall, P2 2.10

Post-Development												
Drainage Area: PB5												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.021	0.15	2.10						23.56	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	292.00	0.024			U				2.50	1.95	
CHANNEL	T2 CHANNEL FLOW	44.00	0.032	0.03		U	9.50	6.60	1.44	11.33	0.06	
Post-Development Time of Concentration, PB5											30.58	18.35

Post-Development												
Drainage Area: PB6												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.034	0.15	2.10						23.56	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	650.00	0.036			U				3.06	3.54	
CHANNEL	T2 CHANNEL FLOW	66.00	0.001	0.03		U	9.00	12.40	0.73	1.27	0.87	
Post-Development Time of Concentration, PB6											27.96	16.78

Post-Development												
Drainage Area: PB7												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.043	0.15	2.10						23.64	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	235.00	0.051			U				3.64	1.06	
CHANNEL	T2 CHANNEL FLOW	539.00	0.035	0.03		U	9.00	12.40	0.73	7.50	1.20	
Post-Development Time of Concentration, PB7											23.72	14.23

Post-Development												
Drainage Area: PB8												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	17.00	0.018	0.15	2.10						3.06	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	136.00	0.110			U				5.35	0.42	
CHANNEL	T2 CHANNEL FLOW	1445.00	0.031	0.03		U	14.00	34.00	0.41	4.84	4.98	
Post-Development Time of Concentration, PB8											8.46	5.07

Post-Development												
Drainage Area: PB9												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.060	0.15	2.10						18.77	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	171.00	0.072			U				4.33	0.66	
CHANNEL	T2 CHANNEL FLOW	873.00	0.028	0.03		U	14.00	34.00	0.41	4.60	3.16	
Post-Development Time of Concentration, PB9											22.59	13.56

Post-Development												
Drainage Area: PB10												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.035	0.15	2.10						23.29	
SHALLOW CONCENTRATED	T2 SHALLOW CONCENTRATED FLOW	395.00	0.034			U				2.97	2.21	
CHANNEL	T2 CHANNEL FLOW	771.00	0.042	0.03		U	14.00	34.00	0.41	5.63	2.28	
Post-Development Time of Concentration, PB10											27.78	16.67

Post-Development												
Drainage Area: PB11												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	300.00	0.031	0.15	2.10						24.44	
CHANNEL	T2 CHANNEL FLOW	1252.00	0.025	0.03		U	9.50	6.60	1.44	10.01	2.08	
Post-Development Time of Concentration, PB11											26.53	15.92

Post-Development												
Drainage Area: PB12												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
MINIMUM TC	T2 MINIMUM TC FLOW										5.00	
Post-Development Time of Concentration, PB12											5.00	3.00

Post-Development												
Drainage Area: PB13												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
MINIMUM TC	T2 MINIMUM TC FLOW										5.00	
Post-Development Time of Concentration, PB13											5.00	3.00

Post-Development												
Drainage Area: PB14												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
SHEET	T1 SHEET FLOW	40.00	0.085	0.013	2.10						0.46	
CHANNEL	T2 CHANNEL FLOW	244.00	0.060	0.03		U	9.00	12.40	0.73	9.82	0.41	
CHANNEL	T2 CHANNEL FLOW	1123.00	0.014	0.03		U	14.00	34.00	0.41	3.25	5.76	
Post-Development Time of Concentration, PB14											6.63	3.98

Post-Development												
Drainage Area: PB15												
		Flow Length, L (ft)	Slope, s (ft/ft)	Manning's Roughness Coefficient, n	Two-year, 24-hr rainfall, P2 (in)	Paved or Unpaved	Cross Sectional Area of Flow, A (ft ²)	Wetted Perimeter, pw (ft)	Hydraulic radius, r (ft)	Average Velocity, V (ft/s)**	Travel Time, Tt (min)	Lag Time (min)
MINIMUM TC	T2 MINIMUM TC FLOW										5.00	
Post-Development Time of Concentration, PB15											5.00	3.00

Post Runoff Analysis
Composite CN

Project Name: Eagleview
 KHA Project #: 196288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Post-Development					
Drainage Area: OB1					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	9.79	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.38	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	0.20	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB1			63.76	10.37	0.569

Post-Development					
Drainage Area: OB2					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	25.92	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.86	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	1.28	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB2			64.16	28.06	0.559

Post-Development					
Drainage Area: OB3					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	40.88	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.89	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	1.67	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB3			63.62	43.44	0.572

Post-Development					
Drainage Area: OB4					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	9.55	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.52	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	0.43	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB4			64.71	10.50	0.545

Post-Development					
Drainage Area: OB5					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	28.58	--
RESIDENTIAL	RR-5 (Woods Landuse)	B	58.00	109.48	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	1.12	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	4.64	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB5			59.98	143.82	0.667

Post-Development					
Drainage Area: OB6					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	60.64	--
RESIDENTIAL	RR-5 (Woods Landuse)	B	58.00	51.19	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	2.04	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	4.53	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB6			61.77	118.40	0.619

Post Runoff Analysis
Composite CN

Project Name: Eagleview
 KHA Project #: 196288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Post-Development					
Drainage Area: OB7					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	122.08	--
RESIDENTIAL	RR-5 (Woods Landuse)	B	58.00	259.48	--
RESIDENTIAL	2.5 acre	B	64.00	16.02	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	5.46	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	18.17	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB7			61.07	421.20	0.637

Post-Development					
Drainage Area: OB8					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	RR-5 (Rangeland Landuse)	B	62.00	8.71	--
RESIDENTIAL	2.5 acre	B	64.00	21.76	--
RESIDENTIAL	1/2 acre (25% Imp.)	B	71.00	0.79	--
IMPERVIOUS	Paved; curbs and storm sewers (excluding right-of-way)	B	98.00	0.24	--
IMPERVIOUS	Gravel (including right of way)	B	85.00	1.57	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - OB8			64.89	33.07	0.541

Post-Development					
Drainage Area: PB1					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	4.19	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.06	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB1			64.35	4.25	0.554

Post-Development					
Drainage Area: PB2					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	1.02	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.06	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB2			65.38	1.08	0.530

Post-Development					
Drainage Area: PB3					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	1.18	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.20	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB3			67.68	1.38	0.478

Post-Development					
Drainage Area: PB4					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	10.18	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.35	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB4			64.84	10.54	0.542

Post-Development					
Drainage Area: PB5					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	6.01	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.17	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB5			64.70	6.18	0.546



**Post Runoff Analysis
Composite CN**

Project Name: Eagleview
 KHA Project #: 196288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Post-Development					
Drainage Area: PB6					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	10.50	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.59	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB6			65.33	11.09	0.531

Post-Development					
Drainage Area: PB7					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	5.28	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.31	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB7			65.38	5.59	0.530

Post-Development					
Drainage Area: PB8					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	11.72	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.06	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB8			64.13	11.78	0.559

Post-Development					
Drainage Area: PB9					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	12.60	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.20	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB9			64.39	12.80	0.553

Post-Development					
Drainage Area: PB10					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	11.25	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.26	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB10			64.57	11.52	0.549

Post-Development					
Drainage Area: PB11					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	15.60	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.51	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB11			64.80	16.11	0.543

Post-Development					
Drainage Area: PB12					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	0.10	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.10	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB12			76.50	0.20	0.307



**Post Runoff Analysis
Composite CN**

Project Name: Eagleview
 KHA Project #: 196288000
 Designed by: DCM Date: 3/17/2022
 Revised by: _____ Date: _____
 Revised by: _____ Date: _____
 Checked by: BAH Date: 3/17/2022

Post-Development					
Drainage Area: PB13					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	B	64.00	1.68	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.08	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB13			65.12	1.76	0.536

Post-Development					
Drainage Area: PB14					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	A	45.00	0.28	--
RESIDENTIAL	2.5 acre	B	64.00	16.54	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.46	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB14			63.64	17.28	0.571

Post-Development					
Drainage Area: PB15					
COVER DESCRIPTION	HYDROLOGIC CONDITION OR COVER TYPE	HYDROLOGIC SOIL GROUP	SCS CURVE NUMBER (CN)	AREA, A (ac.)	INITIAL ABSTRACTION, IA
RESIDENTIAL	2.5 acre	A	45.00	0.61	--
RESIDENTIAL	2.5 acre	B	64.00	8.38	--
IMPERVIOUS	Paved; open ditches (including right-of-way)	B	89.00	0.65	--
CUTSOM					
COMPOSITE SCS CURVE NUMBER - PB15			61.65	9.63	0.622


Project: Eagleview_Subdivision Simulation Run: EV 5-yr Pr. Type II

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
 End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
 Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (AC-FT)
CULV1	0.0021625	1.5	01Oct2021, 12:08	0.1
CULV4	0.0087281	4.7	01Oct2021, 12:08	0.4
CULV5	.000315625	0.5	01Oct2021, 12:00	0.0
OB1	0.0162031	7.1	01Oct2021, 12:08	0.7
OB2	0.0438438	20.6	01Oct2021, 12:08	1.9
OB3	0.0678750	25.3	01Oct2021, 12:13	2.8
OB4	0.0164062	7.5	01Oct2021, 12:10	0.8
OB5	0.22472	36.8	01Oct2021, 12:42	7.4
OB6	0.18501	42.1	01Oct2021, 12:30	7.0
OB7	0.65812	101.4	01Oct2021, 12:53	23.3
OB8	0.0516699	19.0	01Oct2021, 12:13	2.1
P1	0.0228484	10.1	01Oct2021, 12:10	1.0
P10 (CULV2)	0.15425	57.9	01Oct2021, 12:13	6.7
P11 (CULV3)	0.0260593	13.2	01Oct2021, 12:10	1.3
P12 (CULV8)	1.1270	131.8	01Oct2021, 13:19	33.3
P2	0.19753	74.1	01Oct2021, 12:14	8.9
P3	1.2312	137.9	01Oct2021, 13:19	37.8
P4	0.18248	72.2	01Oct2021, 12:13	8.1
P5 (CULV7)	0.0939437	36.8	01Oct2021, 12:13	4.0
P6	0.0771621	29.9	01Oct2021, 12:15	3.3
P7	1.1242	131.7	01Oct2021, 13:18	33.2
P8	1.1062	173.4	01Oct2021, 12:46	39.3
P9 (CULV6)	0.0768465	29.8	01Oct2021, 12:14	3.3
PB1	0.0066453	3.0	01Oct2021, 12:10	0.3
PB10	0.0179938	8.2	01Oct2021, 12:11	0.8
PB11	0.0251766	12.1	01Oct2021, 12:10	1.2

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (AC-FT)
PB12	.000315625	0.5	01Oct2021, 12:00	0.0
PB13	0.0027469	2.2	01Oct2021, 12:00	0.1
PB14	0.0270031	18.9	01Oct2021, 12:01	1.2
PB15	0.0150500	11.0	01Oct2021, 12:00	0.7
PB2	0.0016938	1.0	01Oct2021, 12:06	0.1
PB3	0.0021625	1.5	01Oct2021, 12:07	0.1
PB4	0.0164672	12.6	01Oct2021, 12:00	0.8
PB5	0.0096625	4.2	01Oct2021, 12:12	0.5
PB6	0.0173312	8.6	01Oct2021, 12:11	0.9
PB7	0.0087281	4.7	01Oct2021, 12:08	0.4
PB8	0.0184000	12.1	01Oct2021, 12:01	0.8
PB9	0.0199984	9.8	01Oct2021, 12:08	0.9
R-OB1	0.0162031	7.1	01Oct2021, 12:10	0.7
R-OB2	0.0438438	20.5	01Oct2021, 12:10	1.9
R-OB4-A	0.0842812	32.6	01Oct2021, 12:13	3.5
R-OB4-B	0.0939437	36.7	01Oct2021, 12:15	4.0
R-OB7	1.0678	170.1	01Oct2021, 12:46	37.6
R-OB8	0.0516699	19.0	01Oct2021, 12:16	2.1
R-PB10	1.1242	131.6	01Oct2021, 13:19	33.2
R-PB11	0.0768465	29.8	01Oct2021, 12:15	3.3
R-PB12-A	.000315625	0.5	01Oct2021, 12:02	0.0
R-PB12-B	0.0771621	29.9	01Oct2021, 12:17	3.3
R-PB13	1.1270	131.7	01Oct2021, 13:21	33.2
R-PB3	0.0021625	1.5	01Oct2021, 12:09	0.1
R-PB5	0.15425	57.9	01Oct2021, 12:14	6.7
R-PB7-A	0.0087281	4.7	01Oct2021, 12:10	0.4
R-PB7-B	0.0260593	13.2	01Oct2021, 12:12	1.3
R-PB7-C	0.18248	72.1	01Oct2021, 12:14	8.1
R-PB9	1.1062	173.3	01Oct2021, 12:47	39.3

Reach "CULV1" Results for Run "EV 5-yr Pr. Type II"

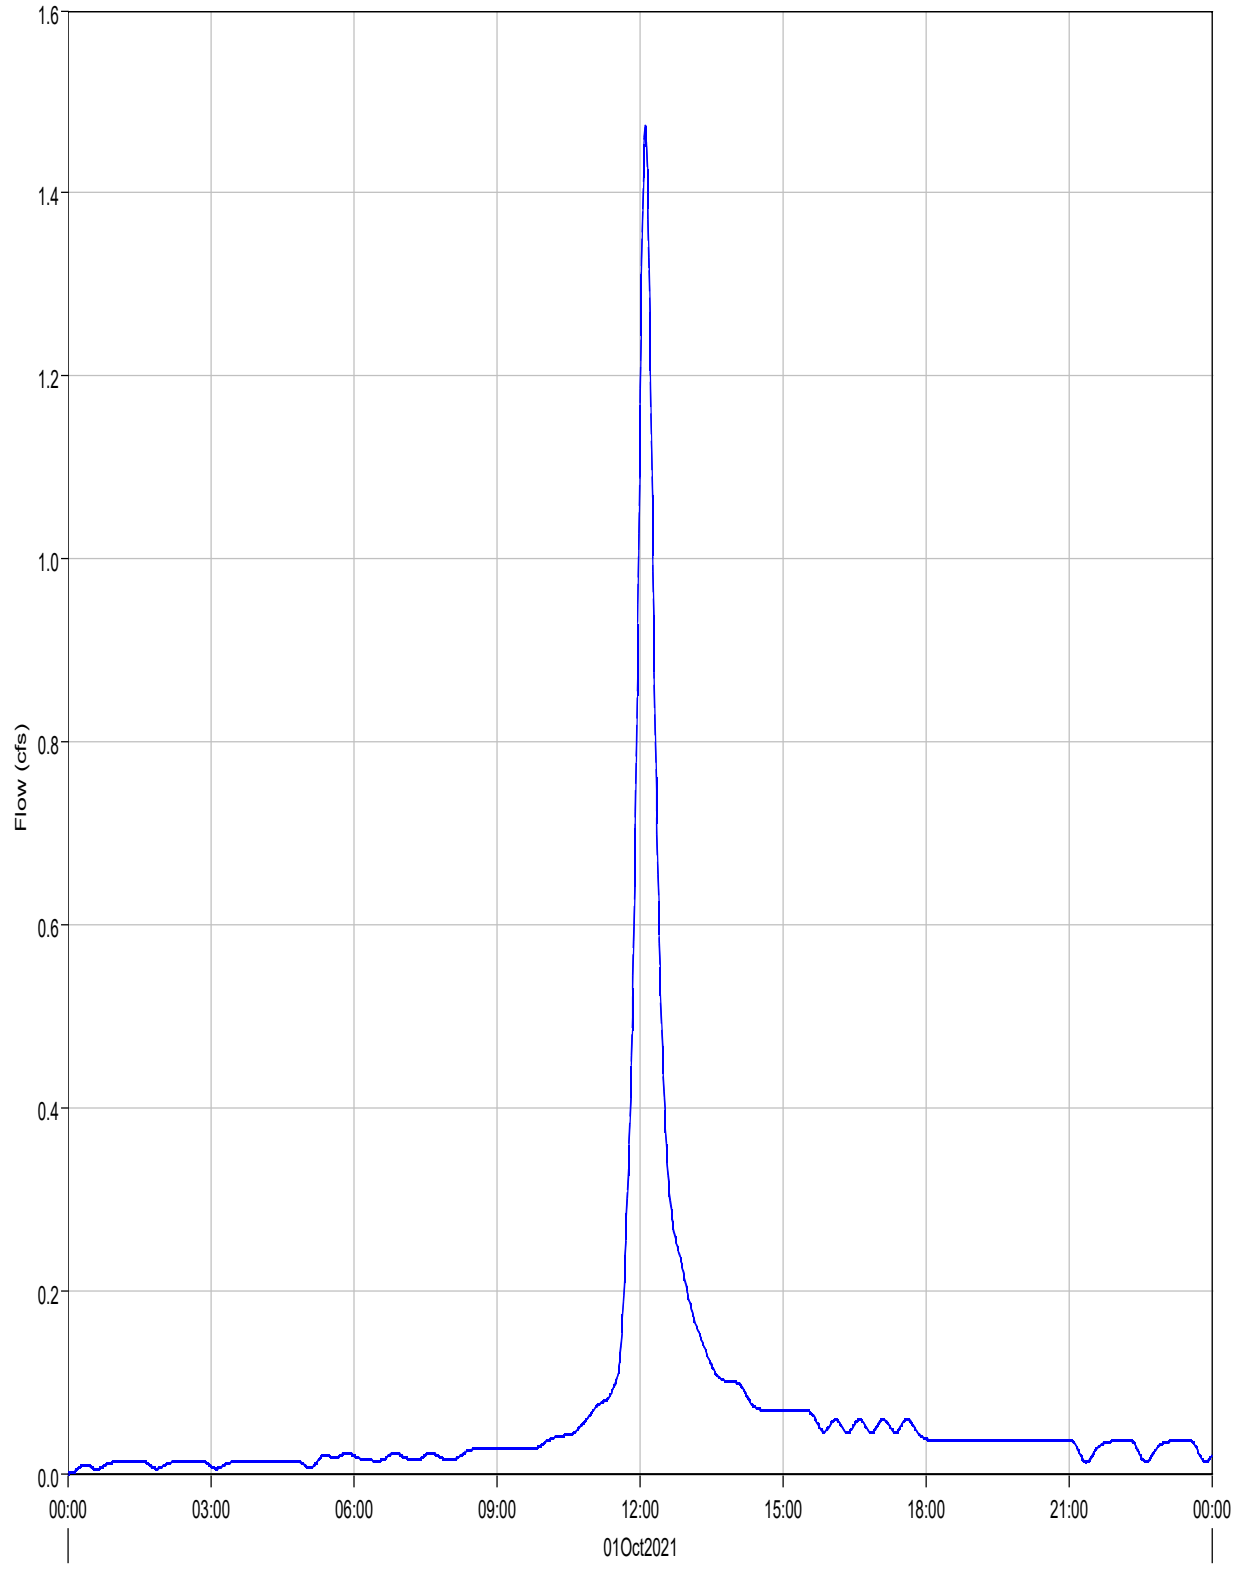

— Run:EV 5-yr Pr. Type II Element:CULV1 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:CULV1 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: CULV1


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	1.5 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:07
Peak Outflow :	1.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:08
Total Inflow :	0.1 (AC-FT)	Total Outflow :	0.1 (AC-FT)

Reach "CULV4" Results for Run "EV 5-yr Pr. Type II"

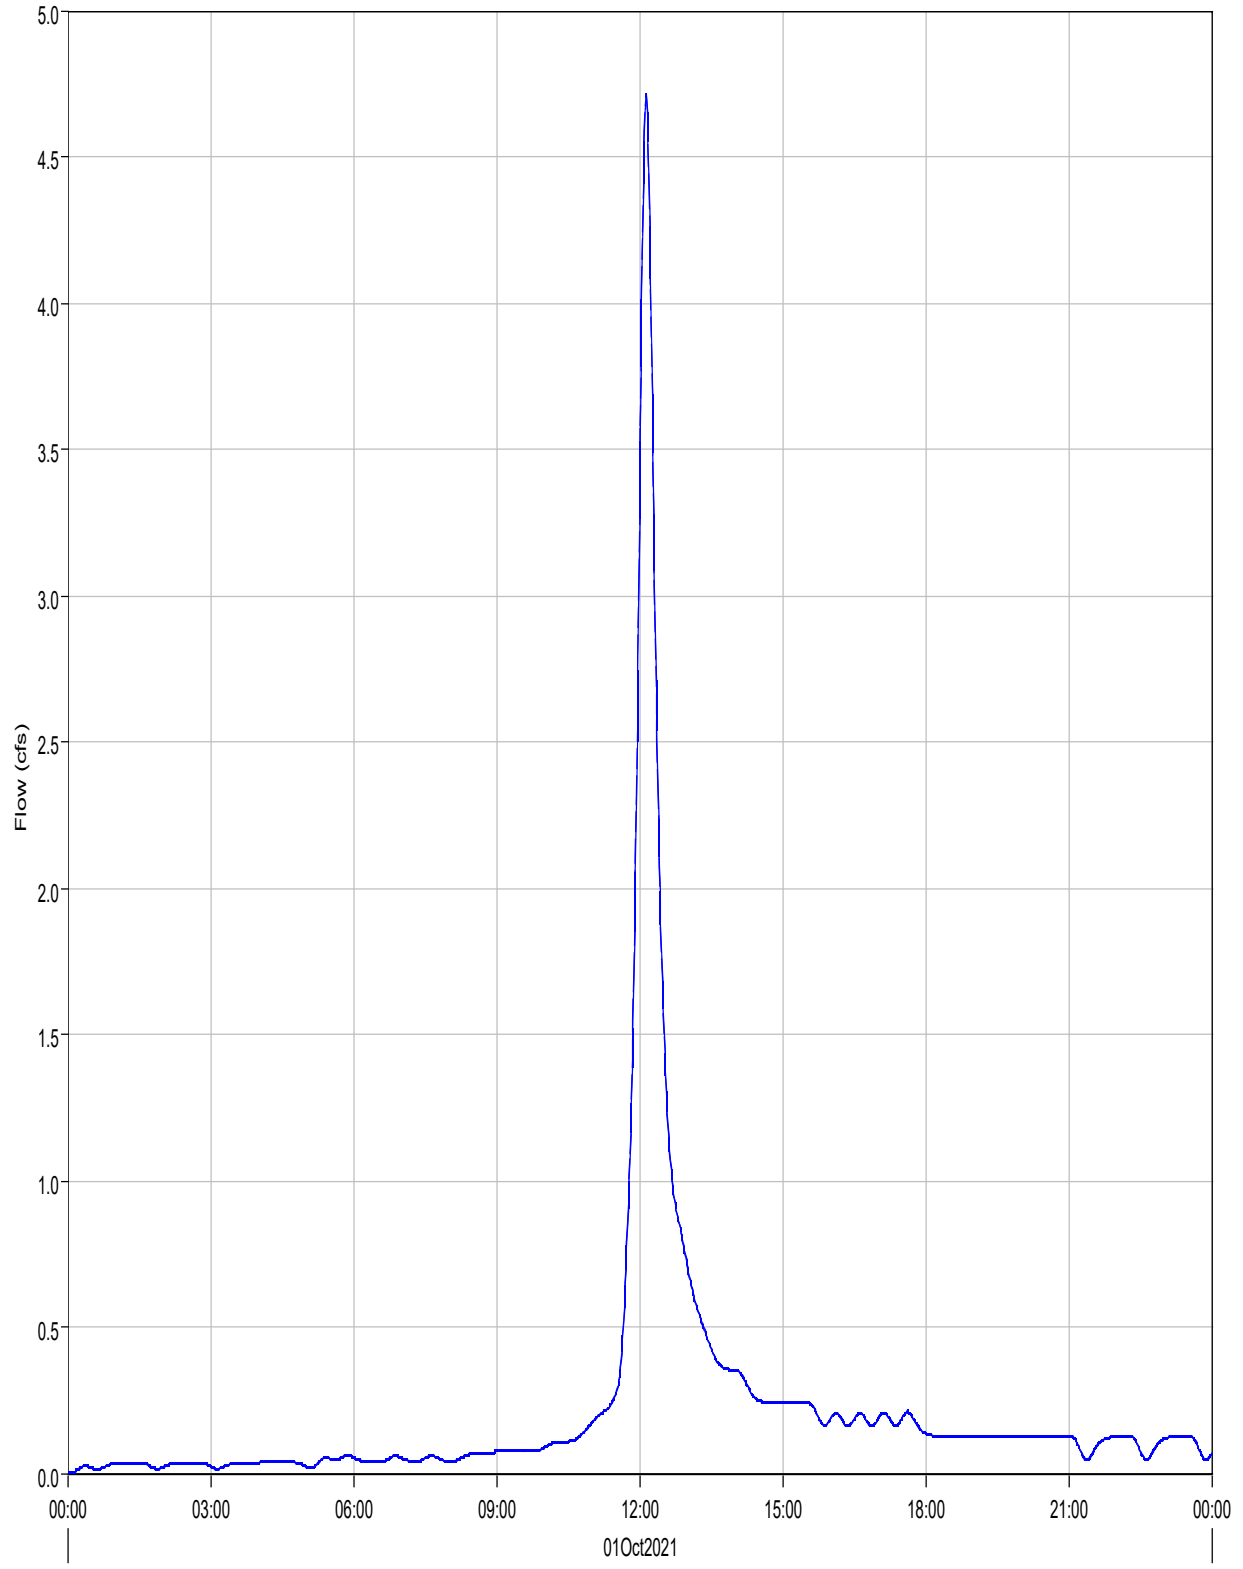

— Run:EV 5-yr Pr. Type II Element:CULV4 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:CULV4 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: CULV4


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	4.7 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	4.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:08
Total Inflow :	0.4 (AC-FT)	Total Outflow :	0.4 (AC-FT)

Reach "CULV5" Results for Run "EV 5-yr Pr. Type II"

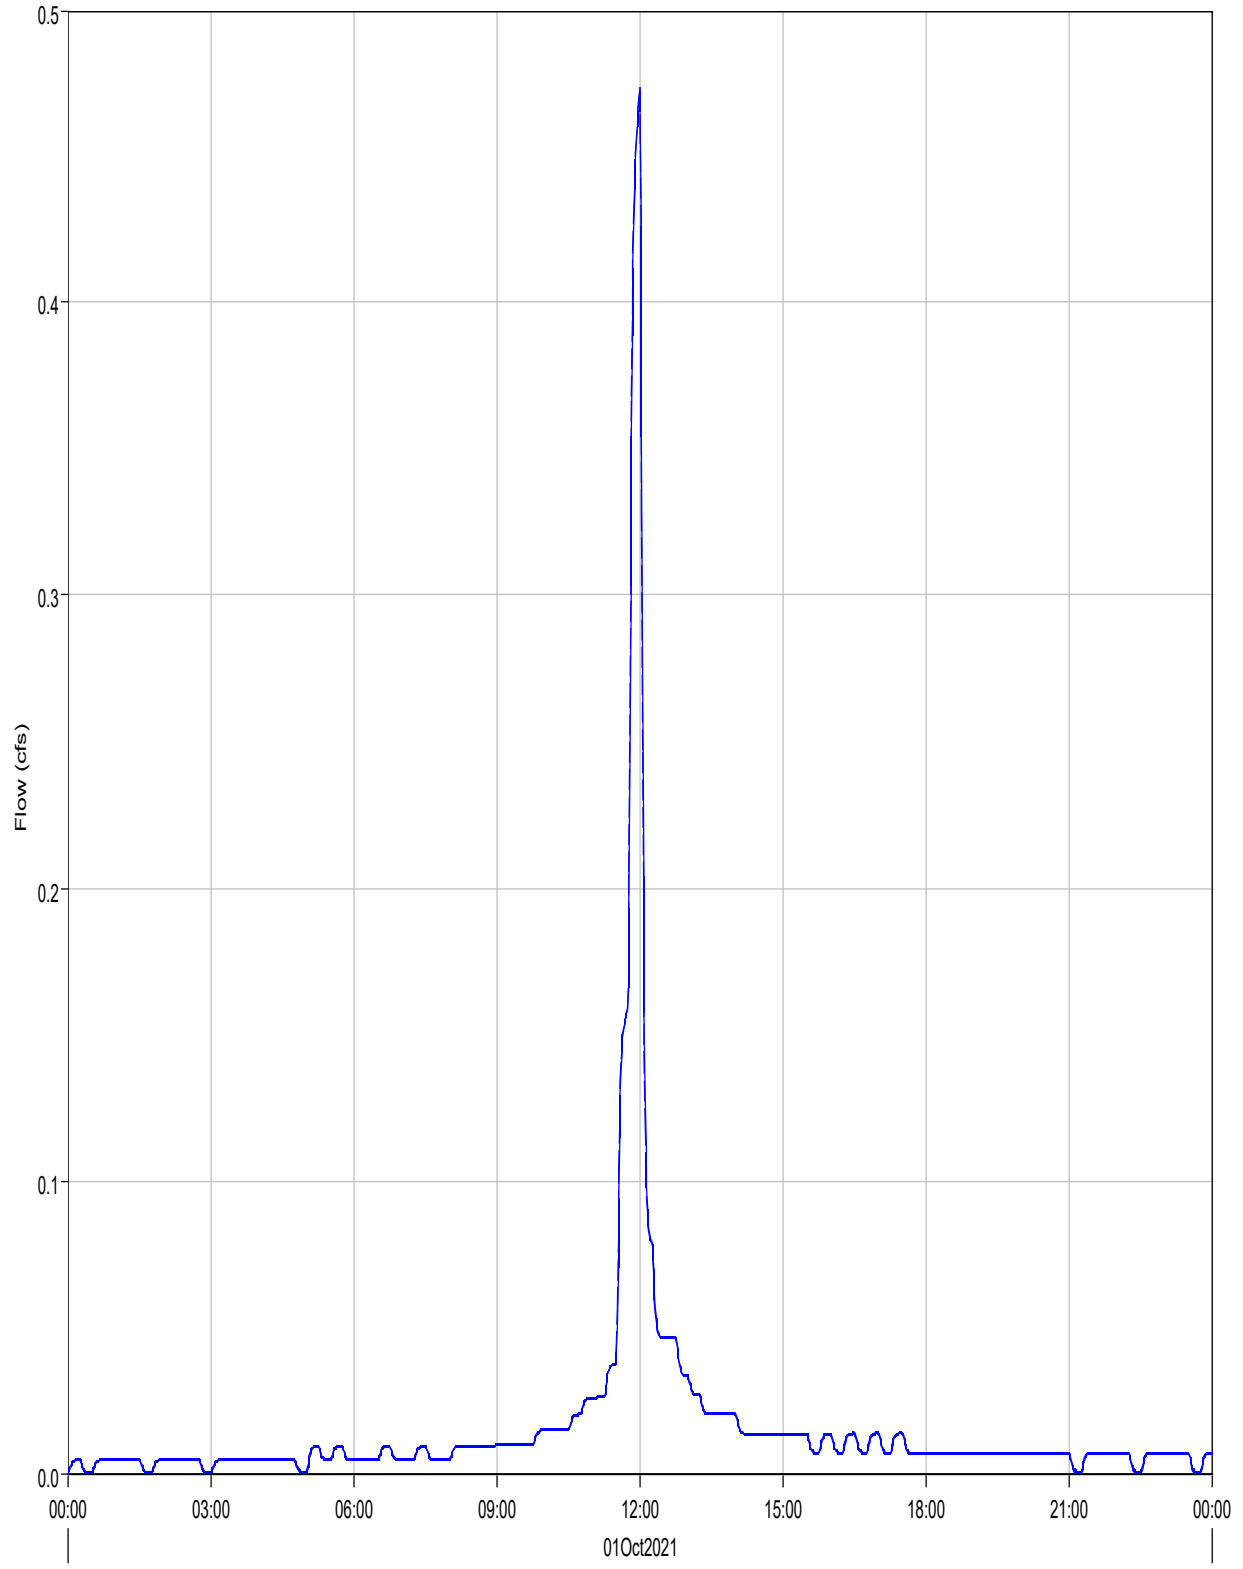

— Run:EV 5-yr Pr. Type II Element:CULV5 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:CULV5 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: CULV5



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	0.5 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:00
Peak Outflow :	0.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:00
Total Inflow :	1.95 (IN)	Total Outflow :	1.95 (IN)

Subbasin "OB1" Results for Run "EV 5-yr Pr. Type II"

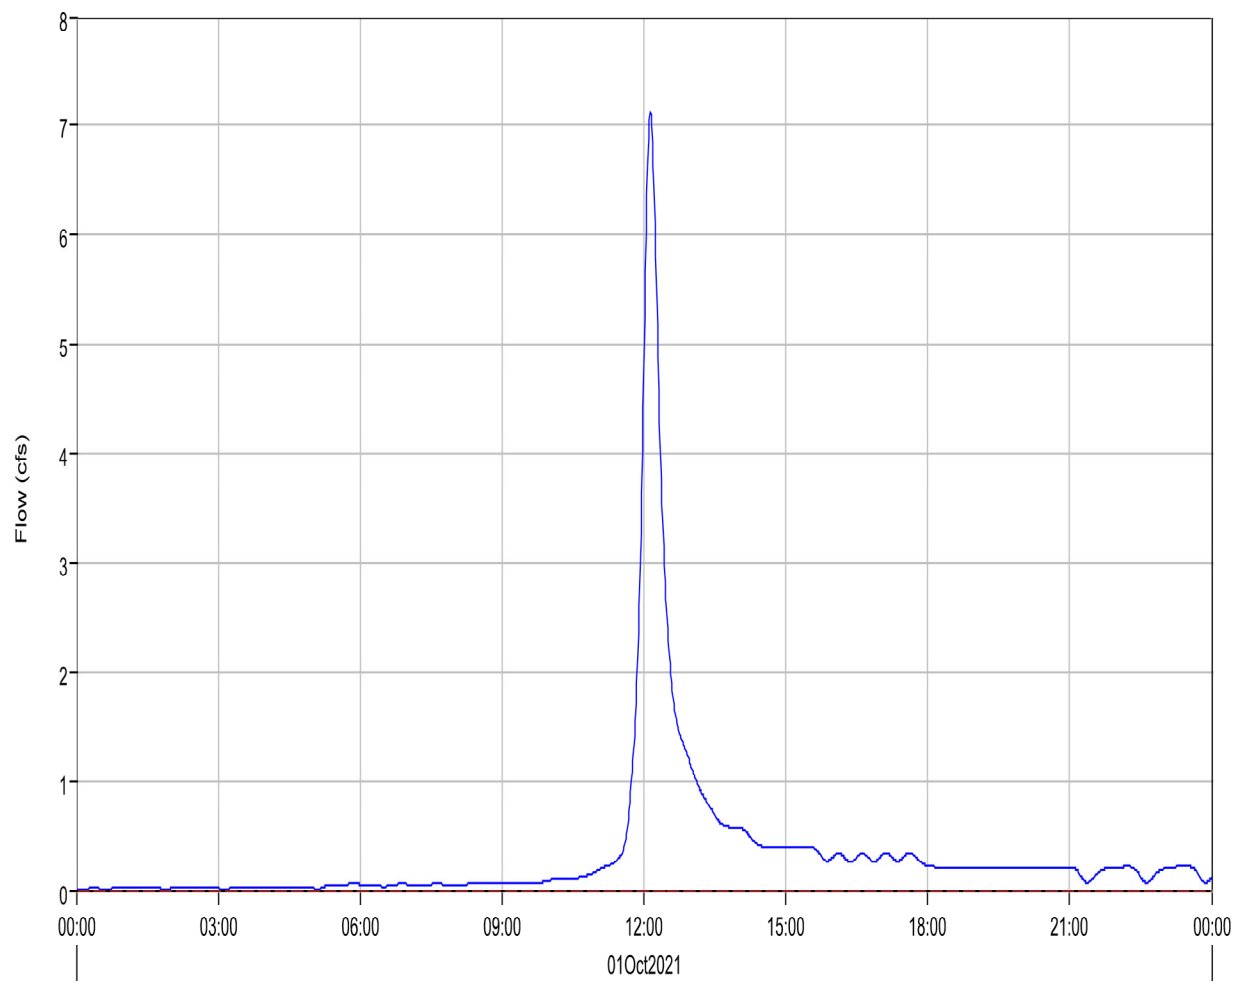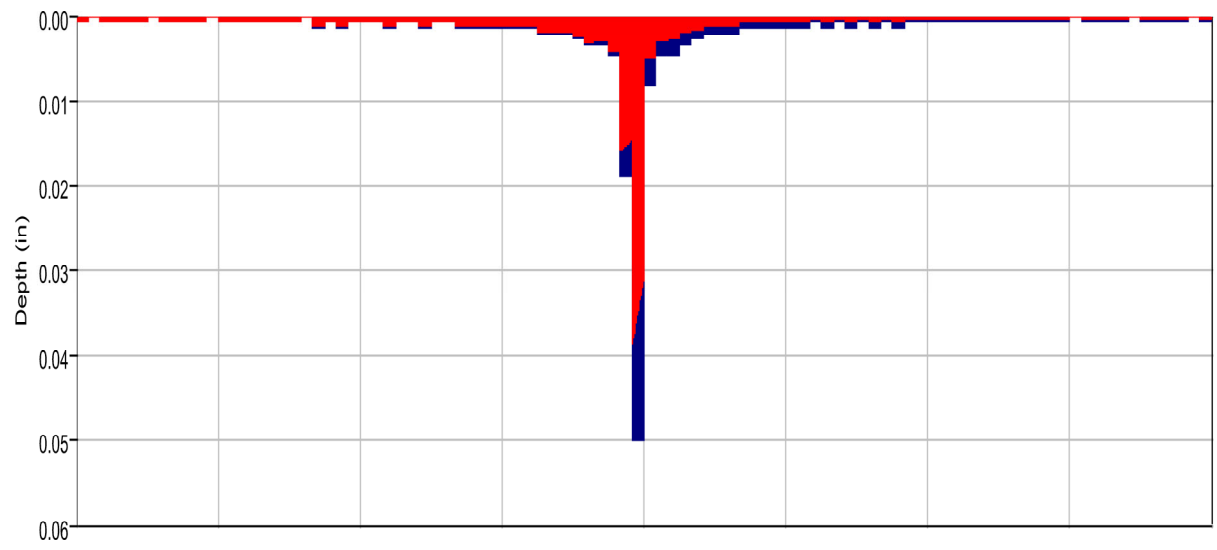

- Run:EV 5-yr Pr. Type II Element:OB1 Result:Precipitation
- Run:EV 5-YR PR. TYPE II Element:OB1 Result:Precipitation Loss
- Run:EV 5-yr Pr. Type II Element:OB1 Result:Outflow
- - - Run:EV 5-YR PR. TYPE II Element:OB1 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB1



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	7.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	2.3 (AC-FT)	Total Direct Runoff :	0.7 (AC-FT)
Total Loss :	1.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.7 (AC-FT)	Discharge :	0.7 (AC-FT)

Subbasin "OB2" Results for Run "EV 5-yr Pr. Type II"

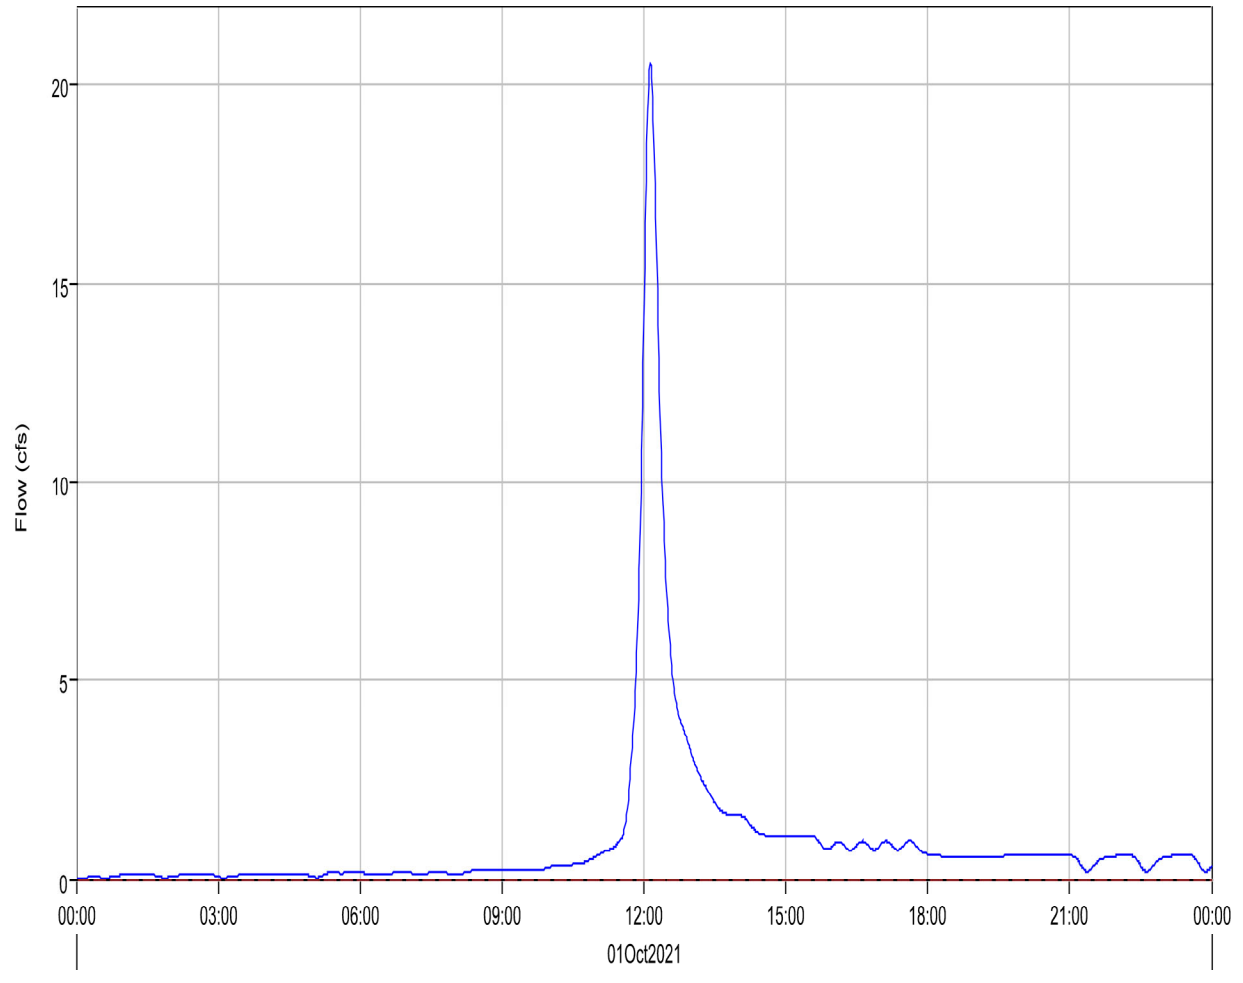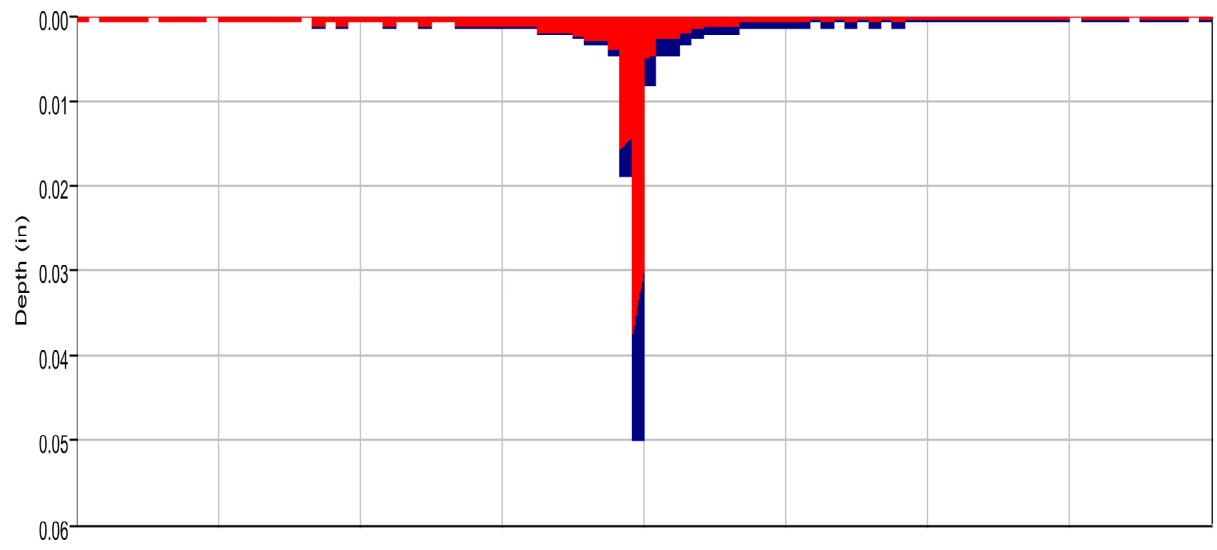

- Run:EV 5-yr Pr. Type II Element:OB2 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:OB2 Result:Outflow
- Run:EV 5-YR PR. TYPE II Element:OB2 Result:Precipitation Loss
- Run:EV 5-YR PR. TYPE II Element:OB2 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	20.6 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	6.3 (AC-FT)	Total Direct Runoff :	1.9 (AC-FT)
Total Loss :	4.4 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.9 (AC-FT)	Discharge :	1.9 (AC-FT)

Subbasin "OB3" Results for Run "EV 5-yr Pr. Type II"

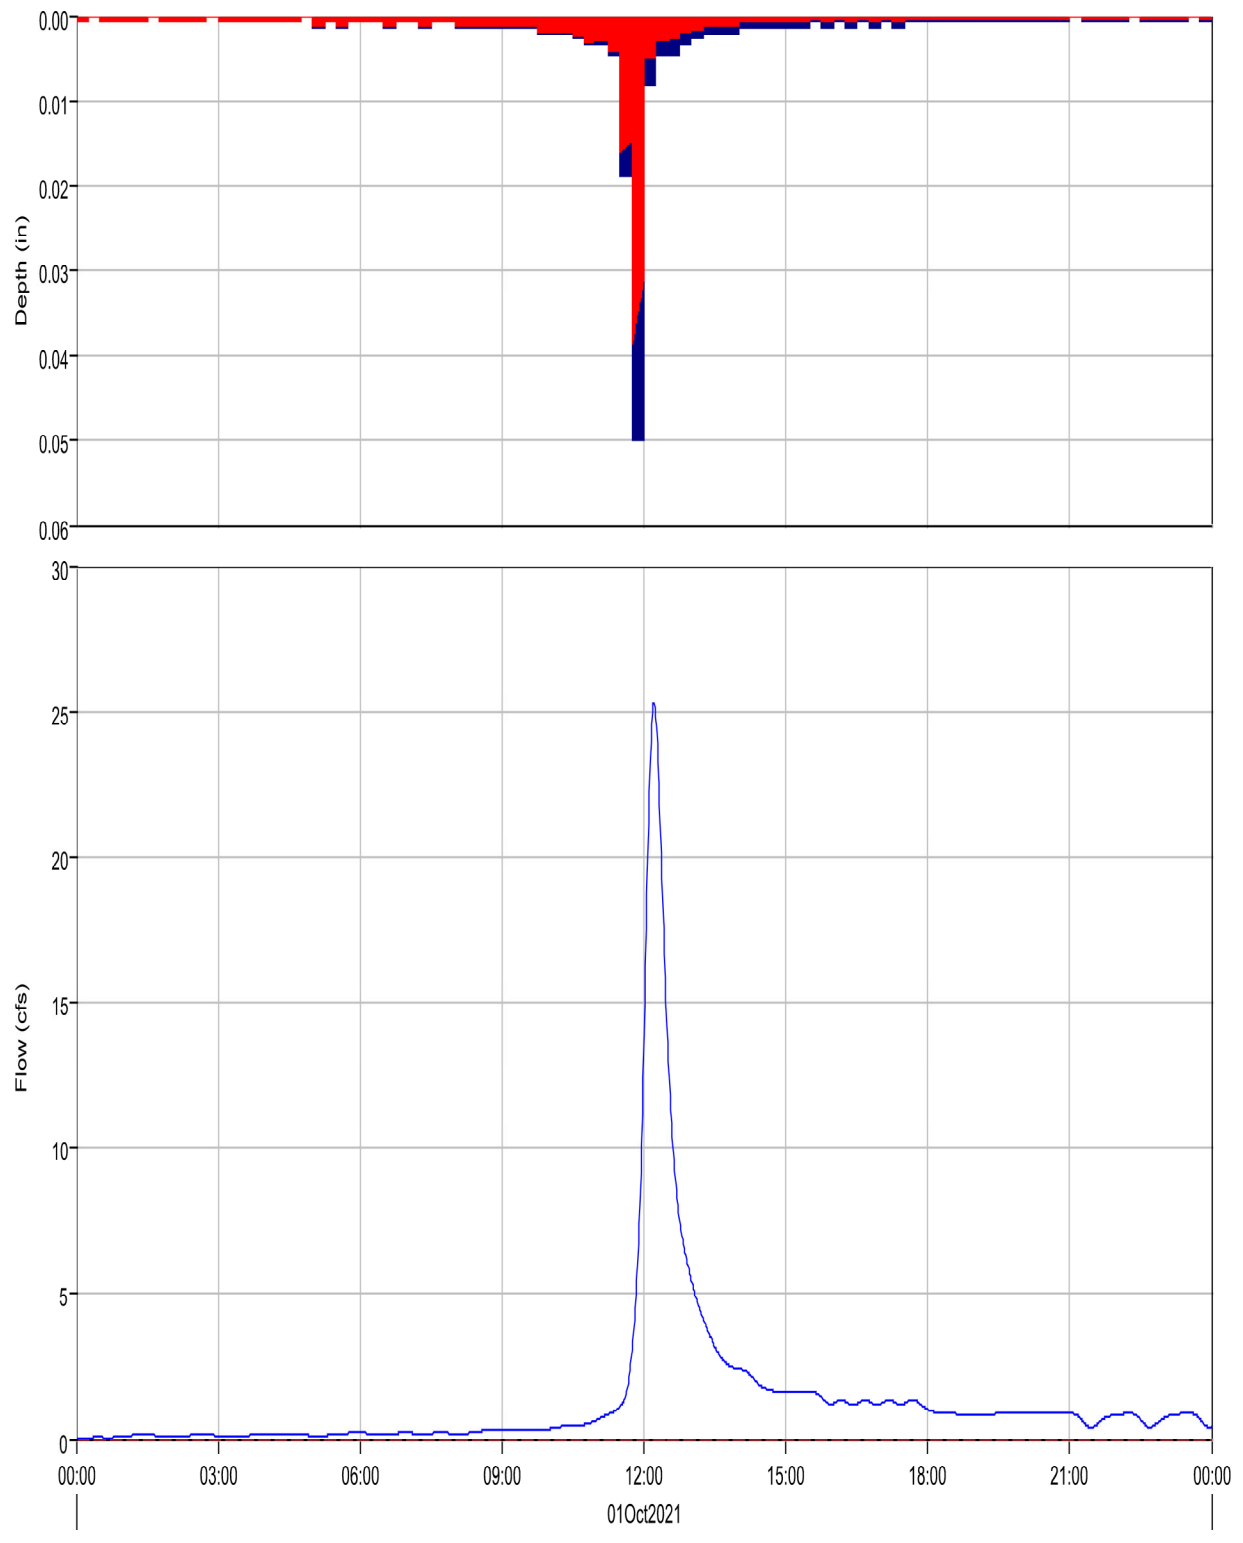

■ Run:EV 5-yr Pr. Type II Element:OB3 Result:Precipitation
— Run:EV 5-yr Pr. Type II Element:OB3 Result:Outflow

■ Run:EV 5-YR PR. TYPE II Element:OB3 Result:Precipitation Loss
- - - Run:EV 5-YR PR. TYPE II Element:OB3 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	25.3 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	9.8 (AC-FT)	Total Direct Runoff :	2.8 (AC-FT)
Total Loss :	7.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.8 (AC-FT)	Discharge :	2.8 (AC-FT)

Subbasin "OB4" Results for Run "EV 5-yr Pr. Type II"

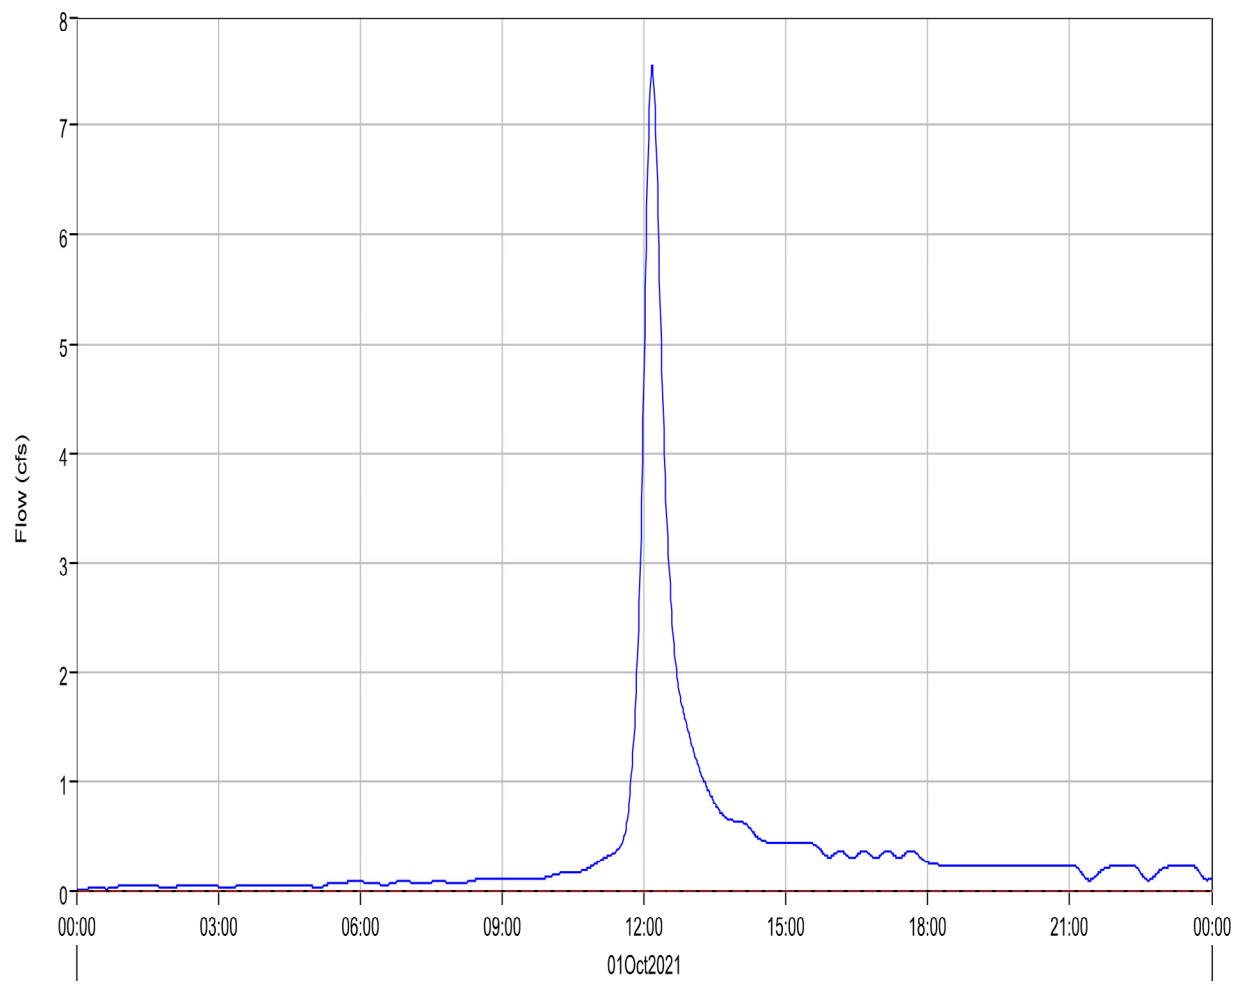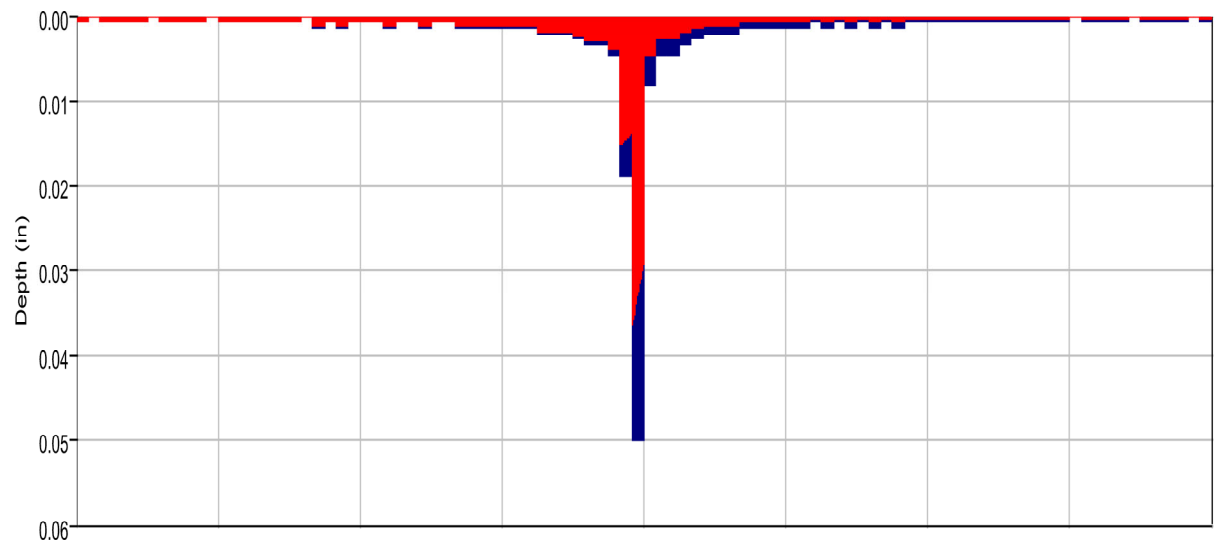

- Run:EV 5-yr Pr. Type II Element:OB4 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:OB4 Result:Outflow
- Run:EV 5-YR PR. TYPE II Element:OB4 Result:Precipitation Loss
- Run:EV 5-YR PR. TYPE II Element:OB4 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB4



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	7.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	2.4 (AC-FT)	Total Direct Runoff :	0.8 (AC-FT)
Total Loss :	1.6 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.8 (AC-FT)	Discharge :	0.8 (AC-FT)

Subbasin "OB5" Results for Run "EV 5-yr Pr. Type II"

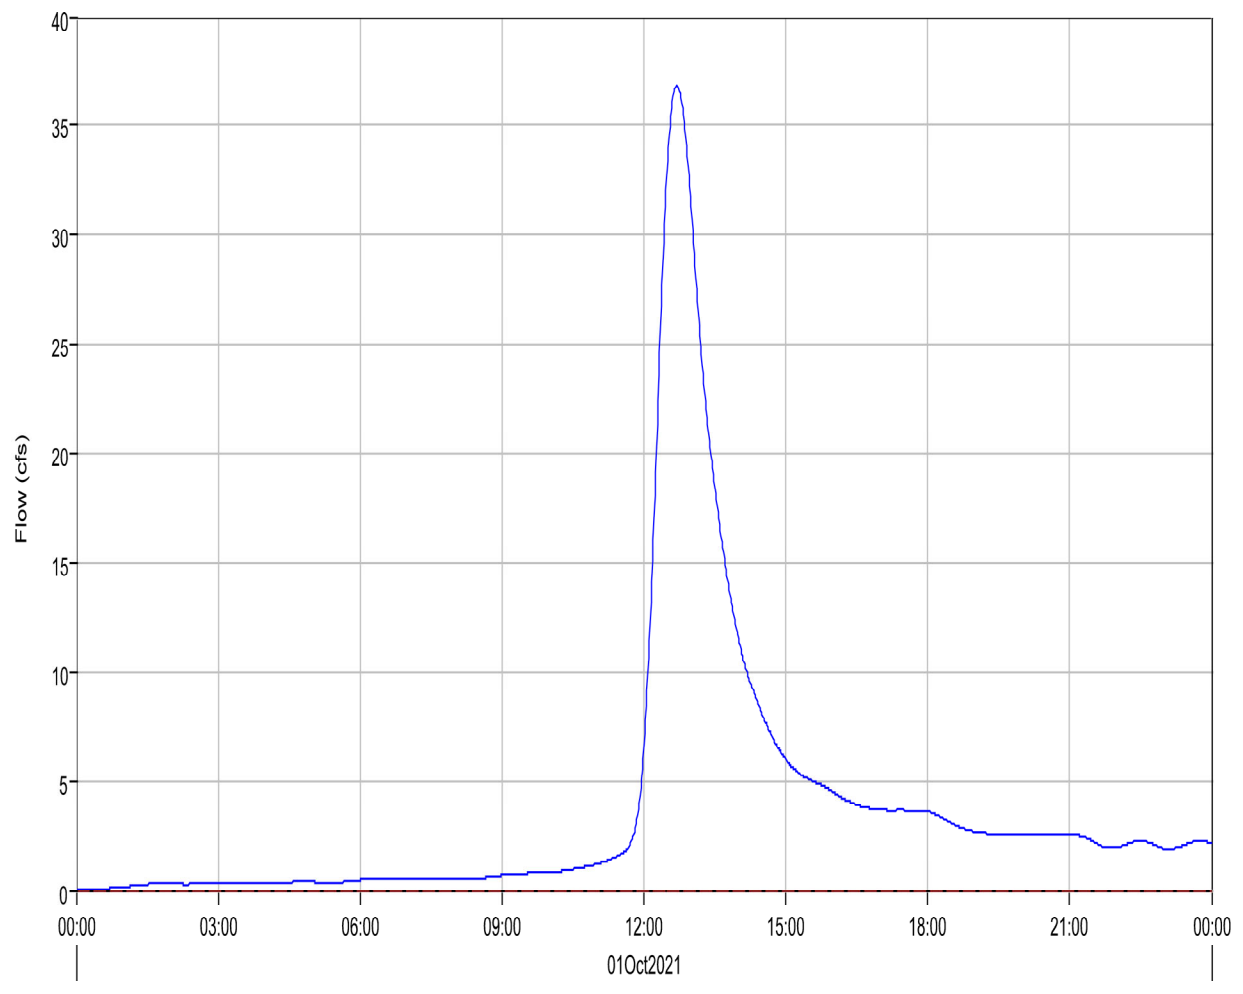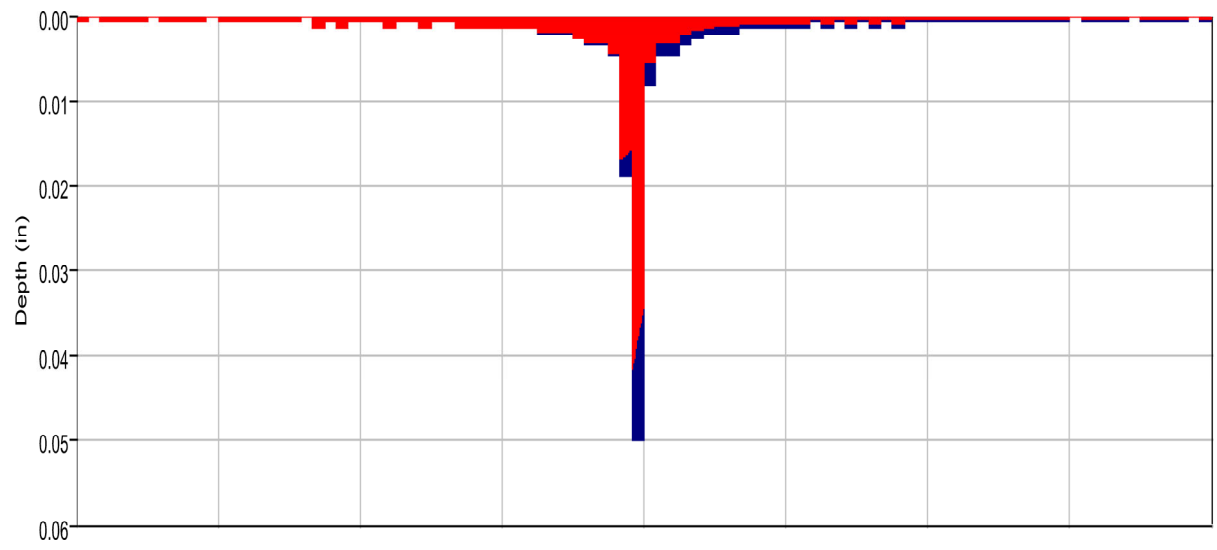

- Run:EV 5-yr Pr. Type II Element:OB5 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:OB5 Result:Outflow
- Run:EV 5-YR PR. TYPE II Element:OB5 Result:Precipitation Loss
- Run:EV 5-YR PR. TYPE II Element:OB5 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB5
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	36.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:42
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.62 (IN)
Total Loss :	2.07 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.63 (IN)	Discharge :	0.62 (IN)

Subbasin "OB6" Results for Run "EV 5-yr Pr. Type II"

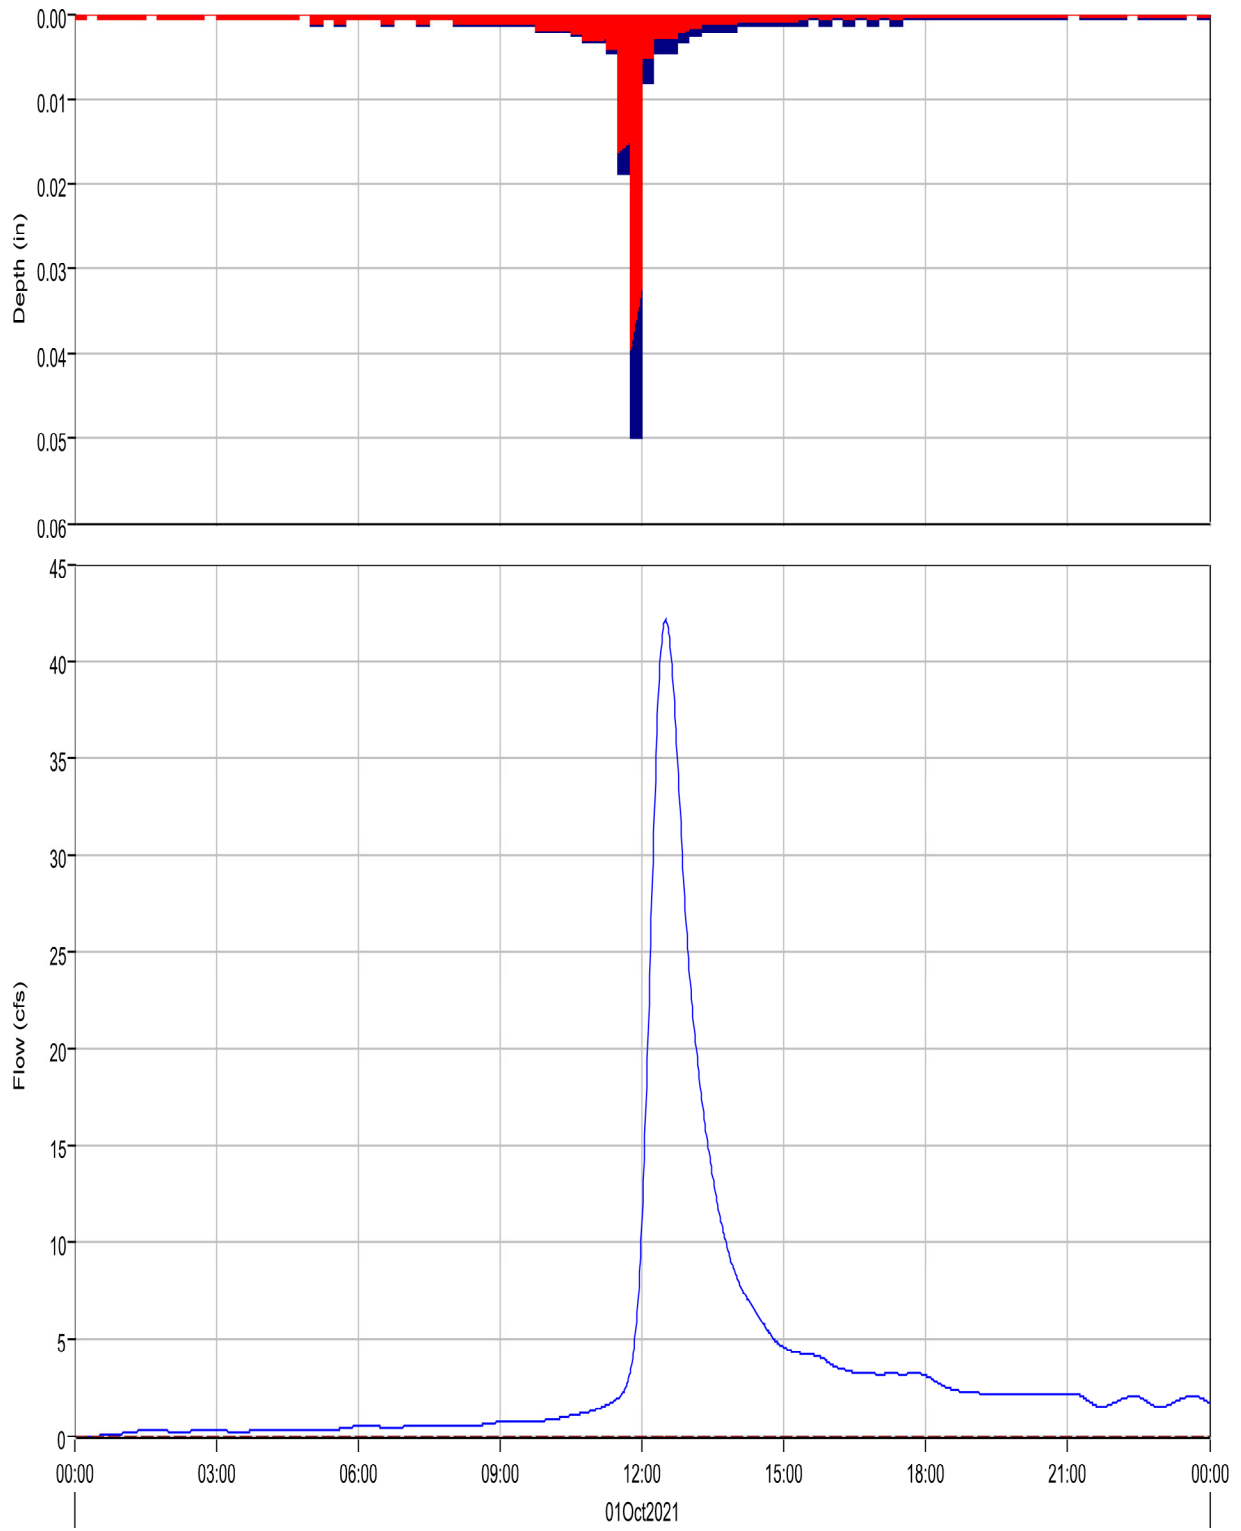

■ Run:EV 5-yr Pr. Type II Element:OB6 Result:Precipitation
— Run:EV 5-yr Pr. Type II Element:OB6 Result:Outflow

■ Run:EV 5-YR PR. TYPE II Element:OB6 Result:Precipitation Loss
- - - Run:EV 5-YR PR. TYPE II Element:OB6 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB6
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	42.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:30
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.71 (IN)
Total Loss :	1.98 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.72 (IN)	Discharge :	0.71 (IN)

Subbasin "OB7" Results for Run "EV 5-yr Pr. Type II"

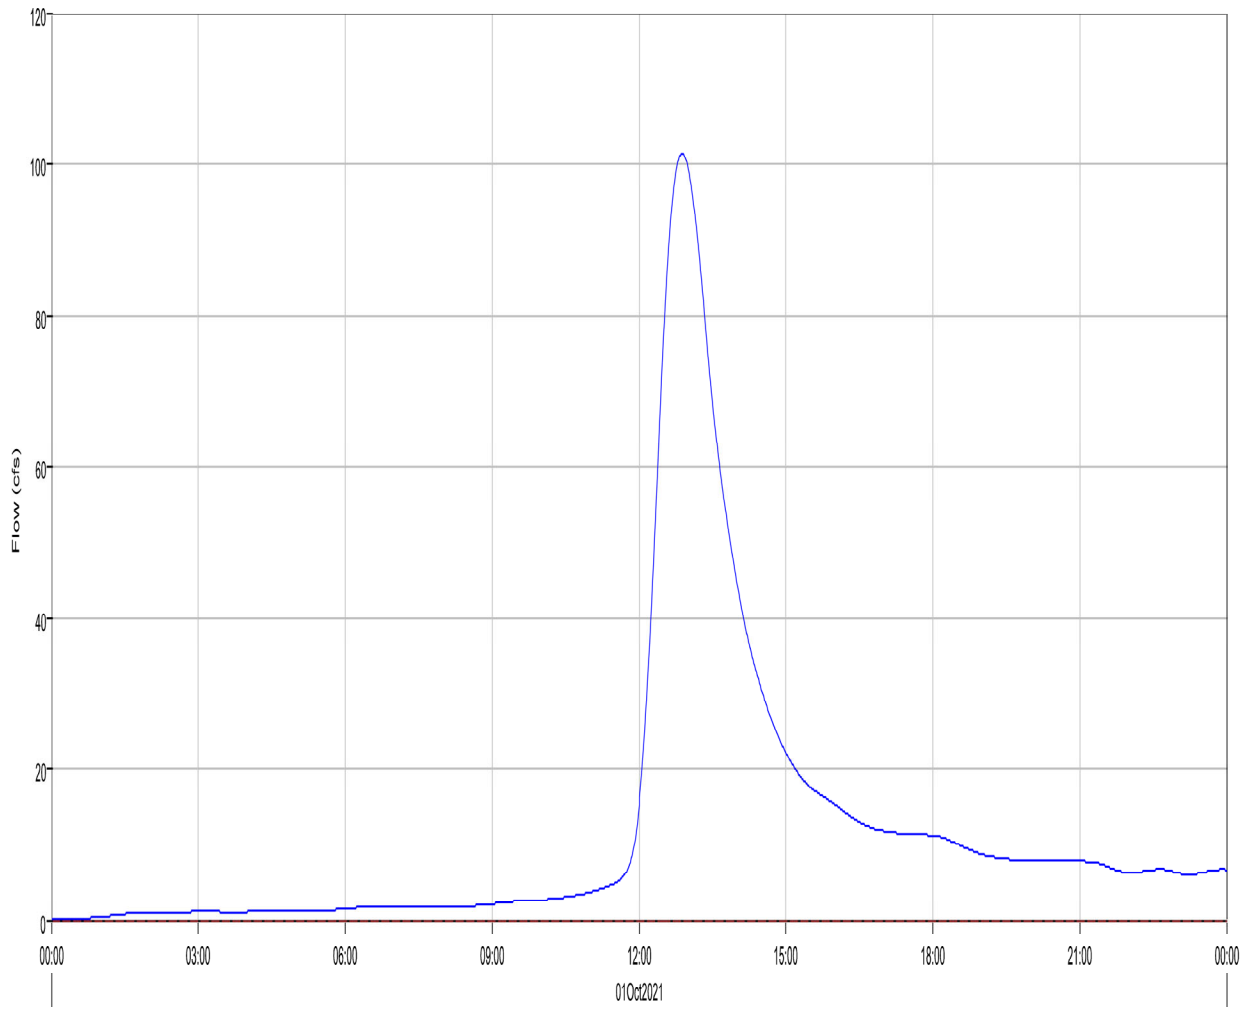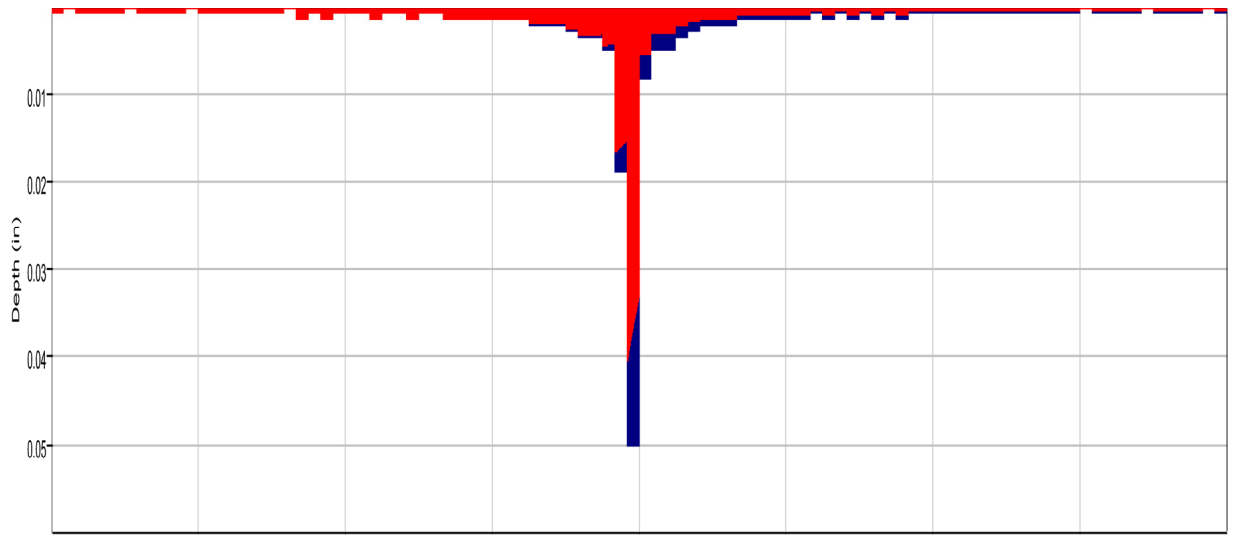

■ Run:EV 5-yr Pr. Type II Element:OB7 Result:Precipitation ■ Run:EV 5-YR PR. TYPE II Element:OB7 Result:Precipitation Loss — Run:EV 5-yr Pr. Type II Element:OB7 Result:Outflow - - - Run:EV 5-YR PR. TYPE II Element:OB7 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB7
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	101.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:53
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.66 (IN)
Total Loss :	2.02 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.68 (IN)	Discharge :	0.66 (IN)

Subbasin "OB8" Results for Run "EV 5-yr Pr. Type II"

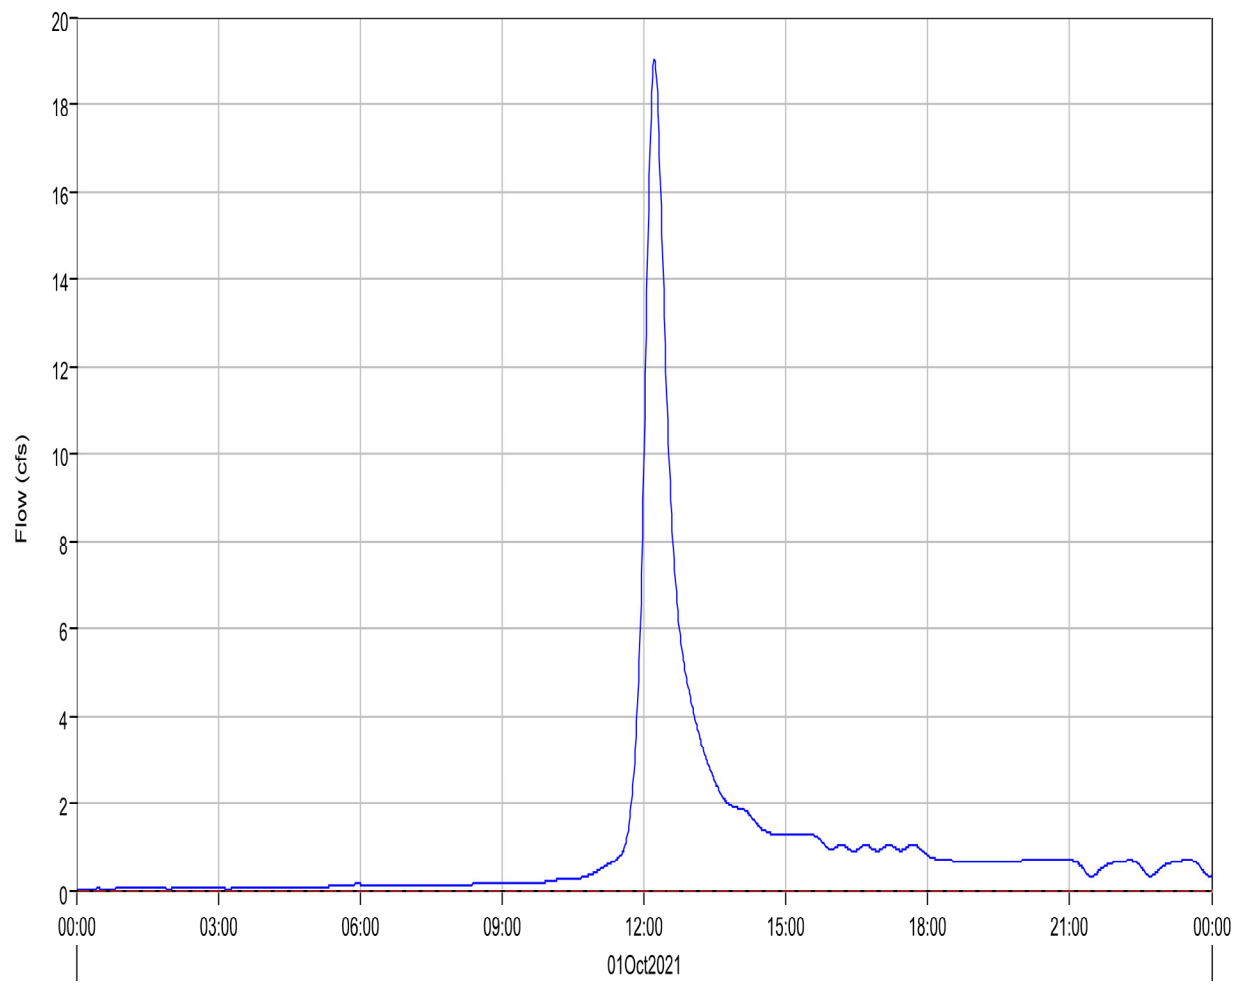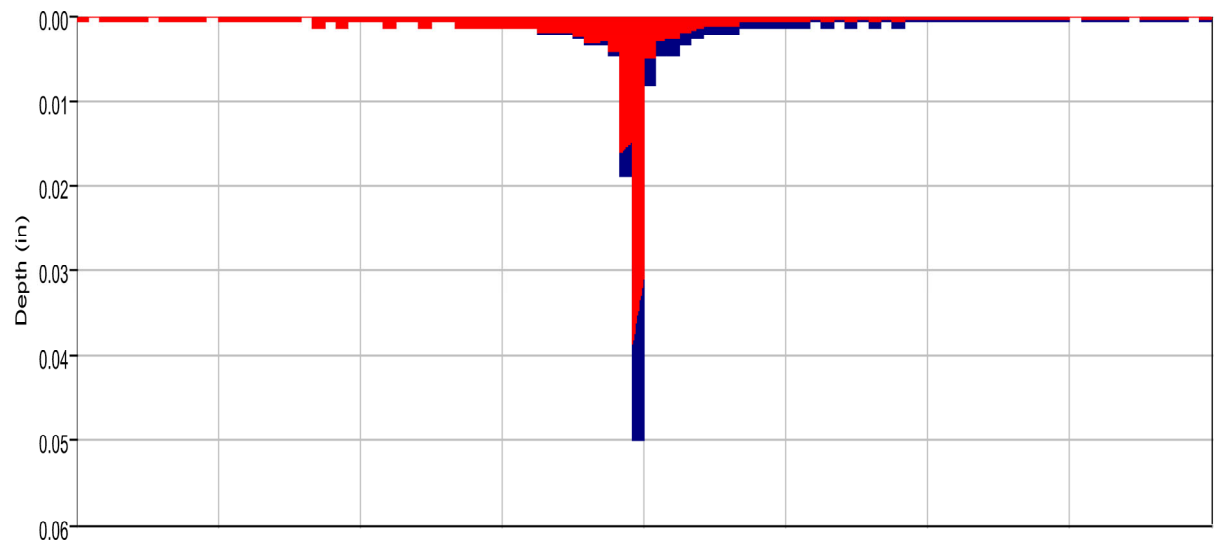

- Run:EV 5-yr Pr. Type II Element:OB8 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:OB8 Result:Outflow
- Run:EV 5-YR PR. TYPE II Element:OB8 Result:Precipitation Loss
- Run:EV 5-YR PR. TYPE II Element:OB8 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: OB8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	19.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.76 (IN)
Total Loss :	1.94 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.76 (IN)	Discharge :	0.76 (IN)

Junction "P1" Results for Run "EV 5-yr Pr. Type II"

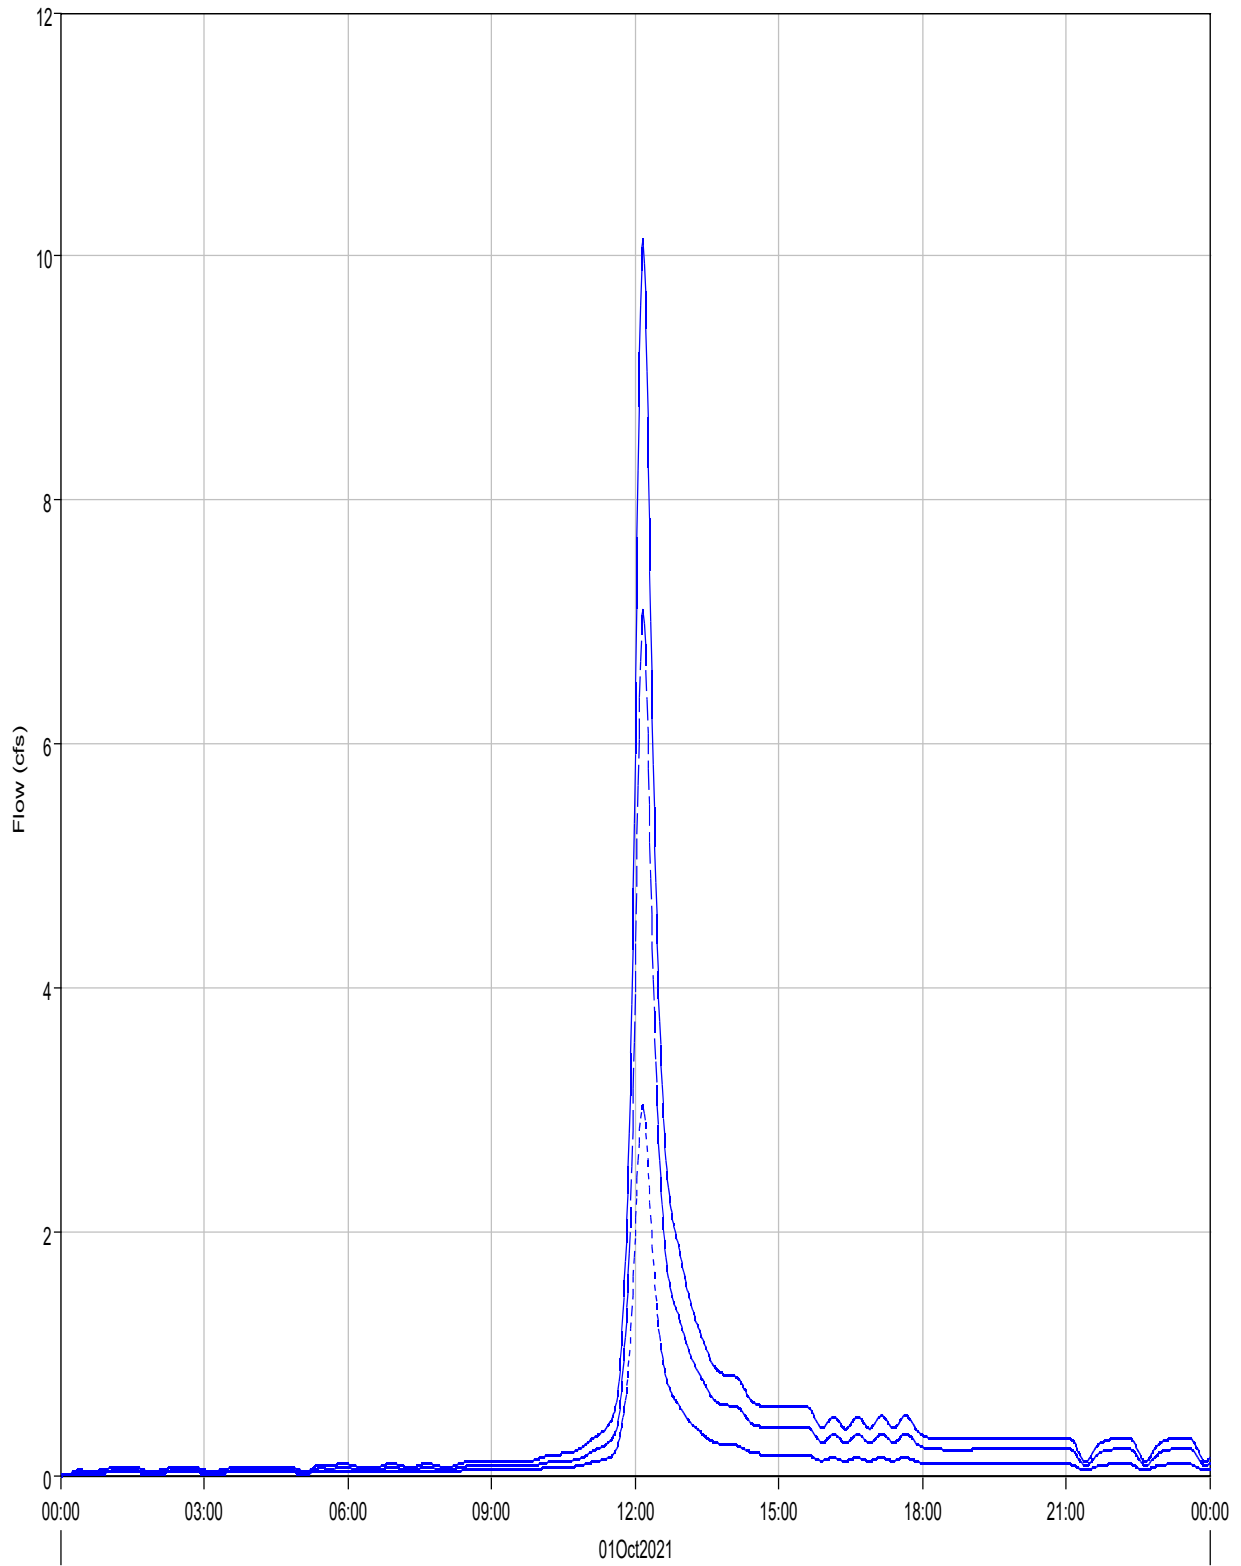

— Run:EV 5-yr Pr. Type II Element:P1 Result:Outflow - - - Run:EV 5-yr Pr. Type II Element:R-OB1 Result:Outflow ····· Run:EV 5-yr Pr. Type II Element:PB1 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Junction: P1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 10.1 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:10
Total Outflow : 1.0 (AC-FT)

Junction "P2" Results for Run "EV 5-yr Pr. Type II"

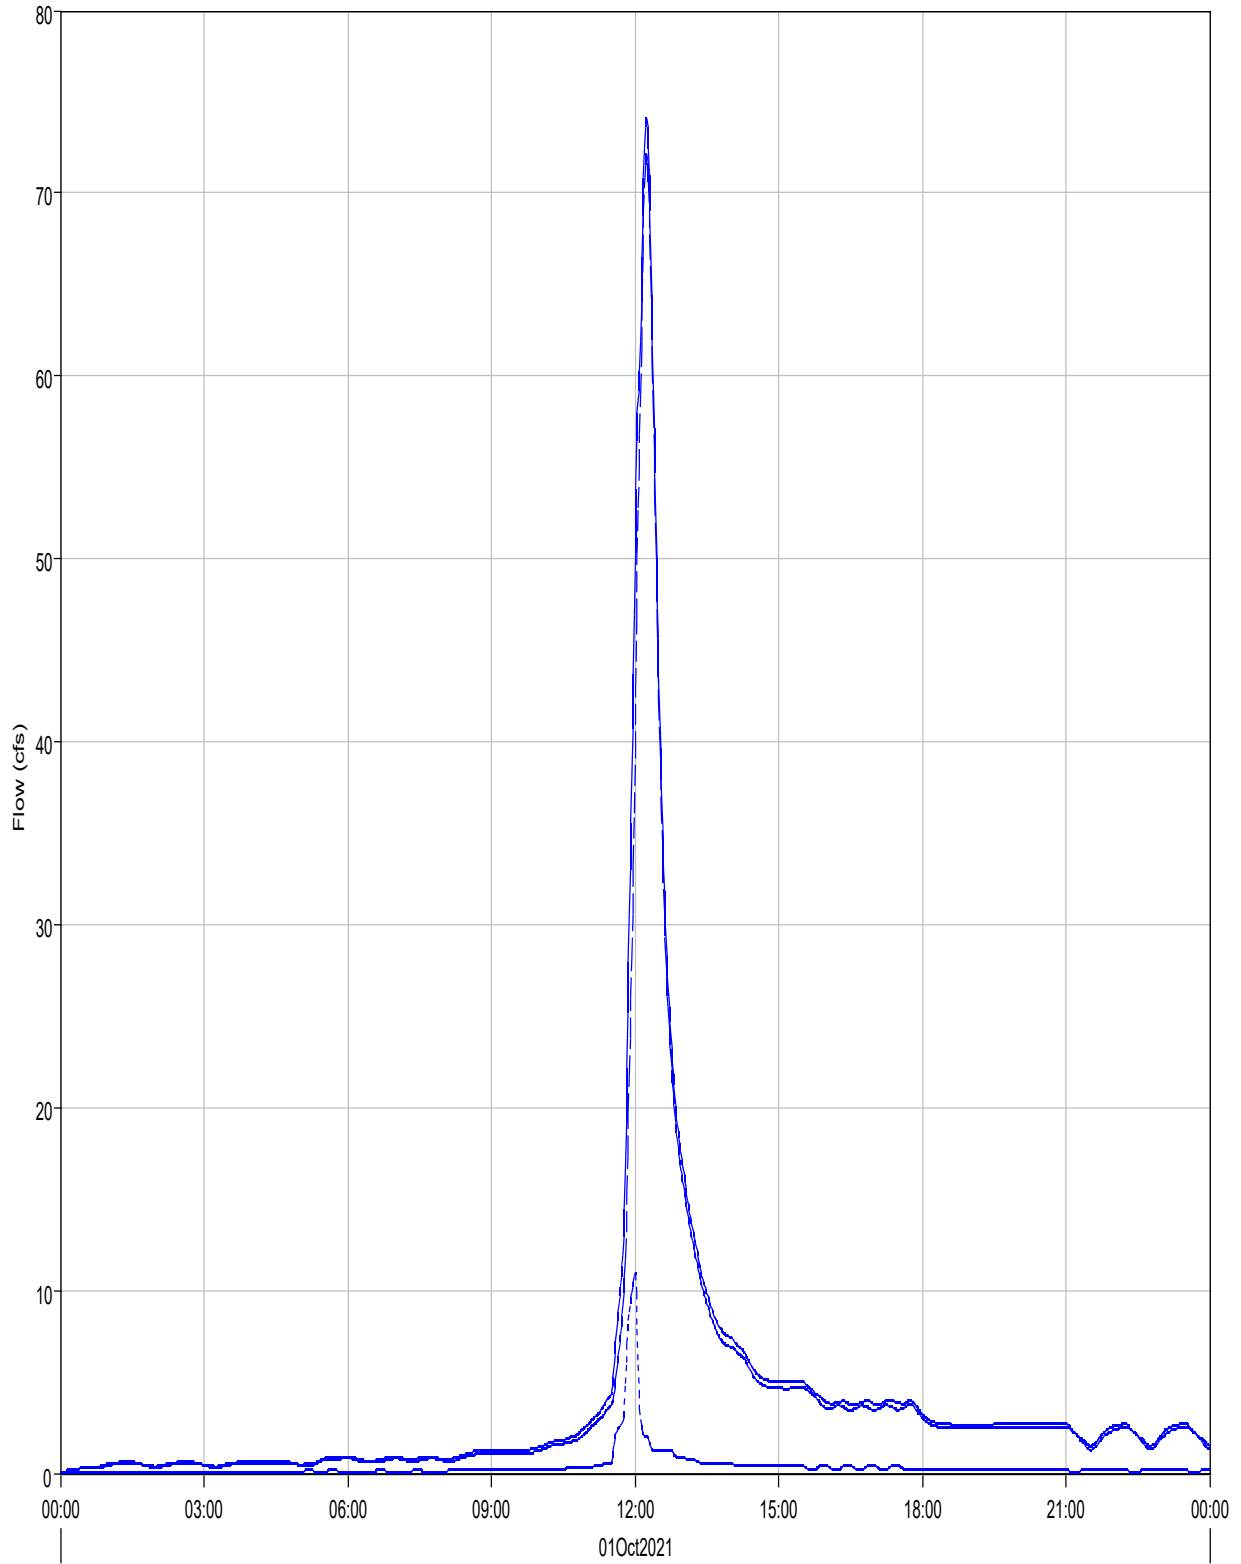

— Run:EV 5-yr Pr. Type II Element:P2 Result:Outflow - - - Run:EV 5-yr Pr. Type II Element:R-PB7-C Result:Outflow ····· Run:EV 5-yr Pr. Type II Element:PB15 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Junction: P2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 74.1 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:14
Total Outflow : 8.9 (AC-FT)

Junction "P3" Results for Run "EV 5-yr Pr. Type II"

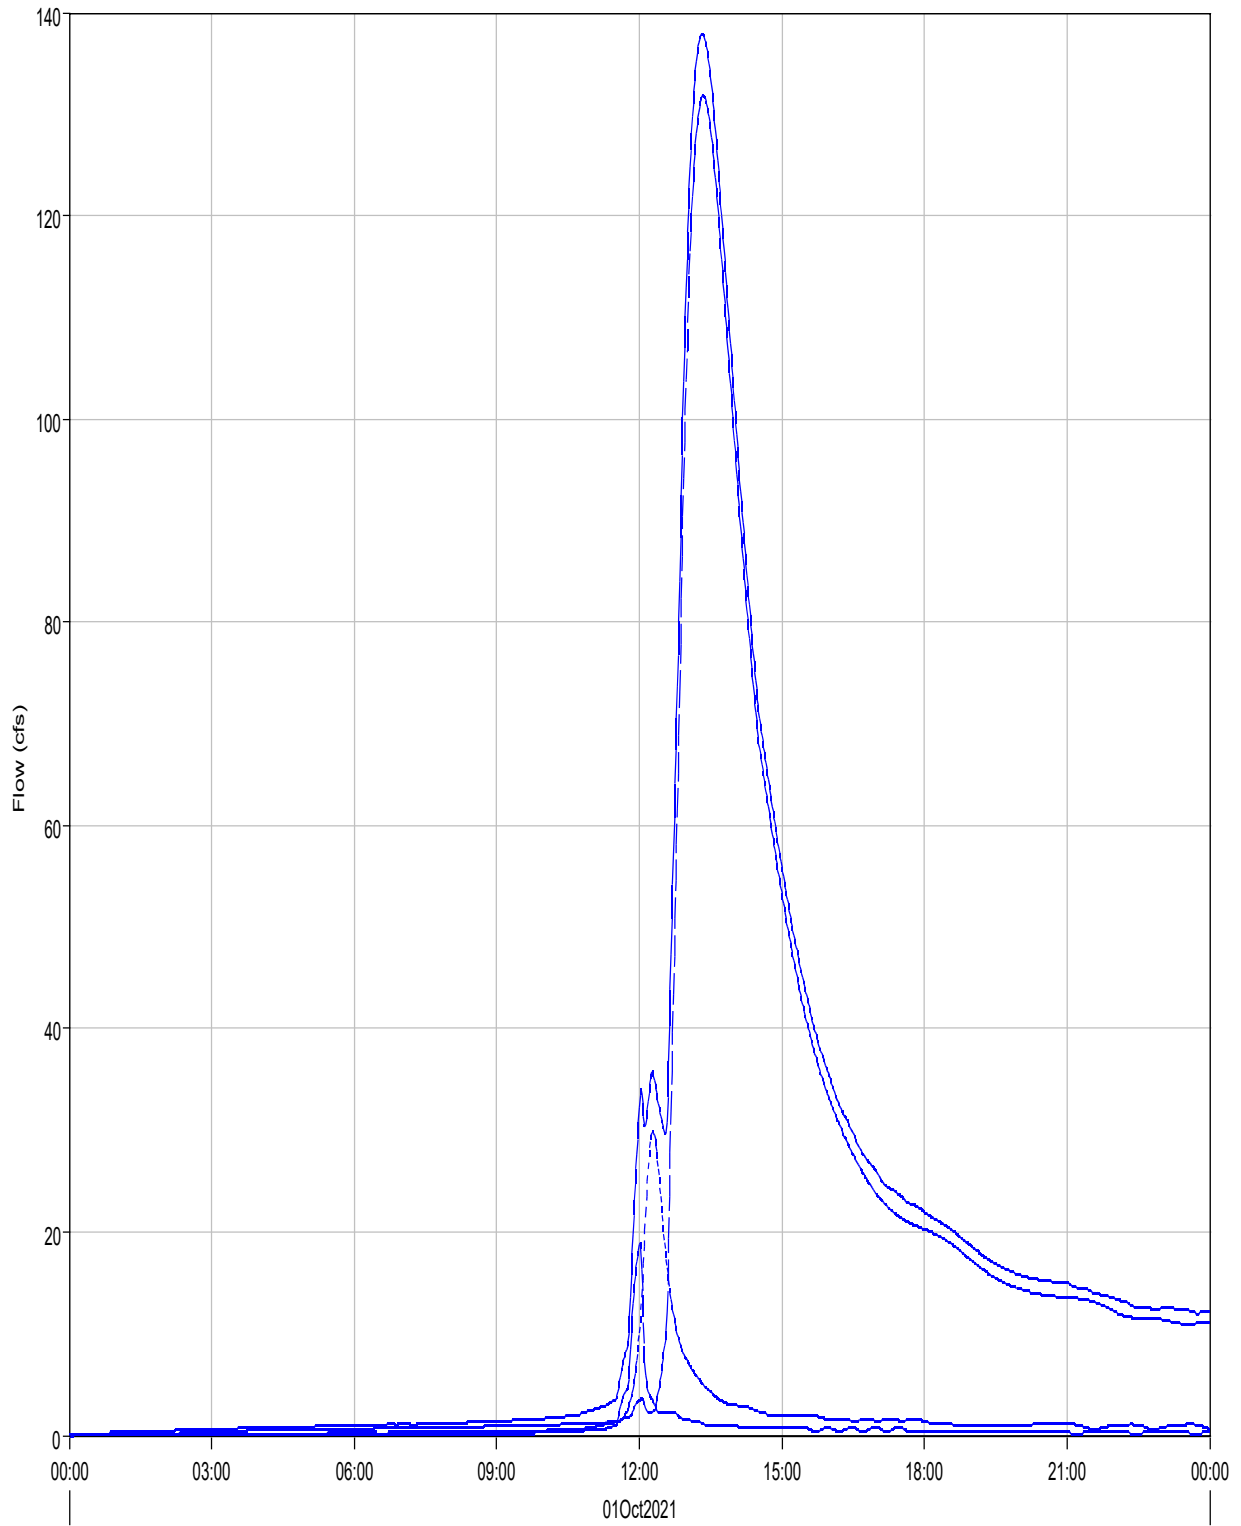

— Run:EV 5-yr Pr. Type II Element:P3 Result:Outflow - - - Run:EV 5-yr Pr. Type II Element:R-PB13 Result:Outflow ····· Run:EV 5-yr Pr. Type II Element:R-PB12-B Result:Outflow
- ··· Run:EV 5-yr Pr. Type II Element:PB14 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Junction: P3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 137.9 (CFS) Date/Time of Peak Outflow : 01Oct2021, 13:19
Total Outflow : 37.8 (AC-FT)

Junction "P4" Results for Run "EV 5-yr Pr. Type II"

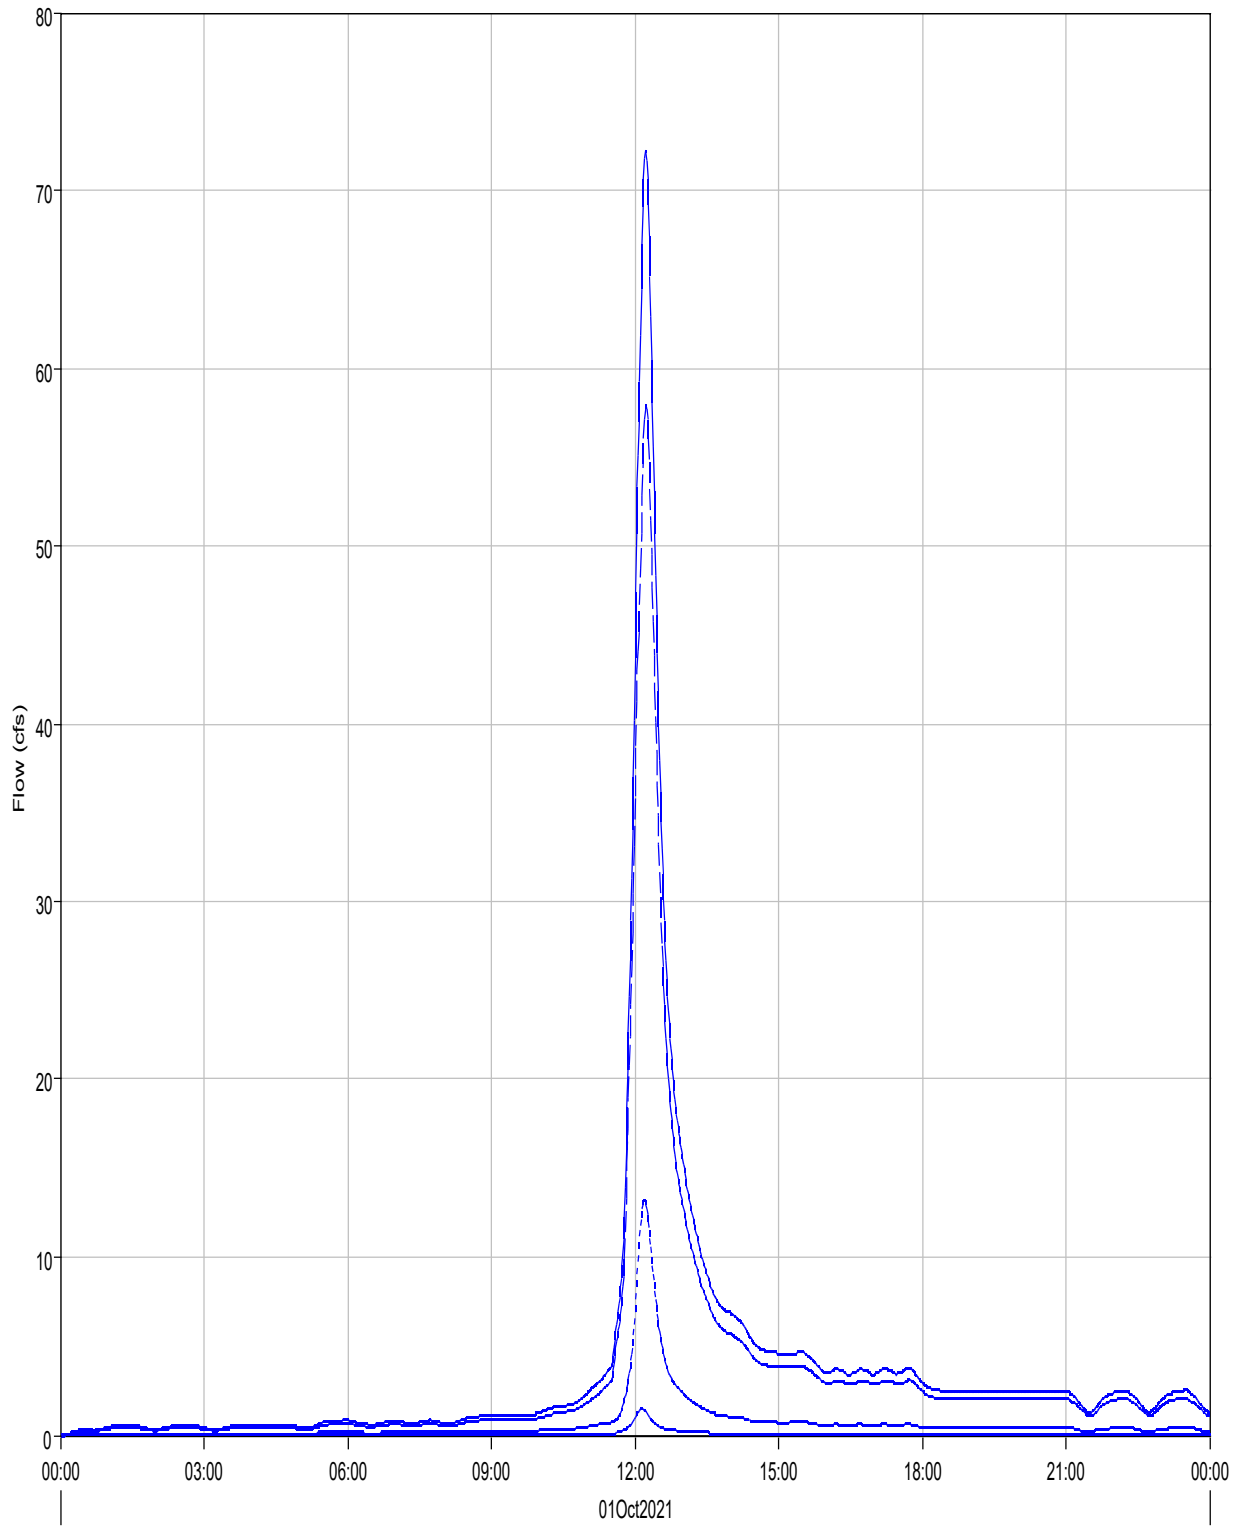

— Run:EV 5-yr Pr. Type II Element:P4 Result:Outflow - - - Run:EV 5-yr Pr. Type II Element:R-PB5 Result:Outflow . . . Run:EV 5-yr Pr. Type II Element:R-PB7-B Result:Outflow
- . - Run:EV 5-yr Pr. Type II Element:R-PB3 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Junction: P4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow :	72.2 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Outflow :	8.1 (AC-FT)		

Reach "P5 (CULV7)" Results for Run "EV 5-yr Pr. Type II"

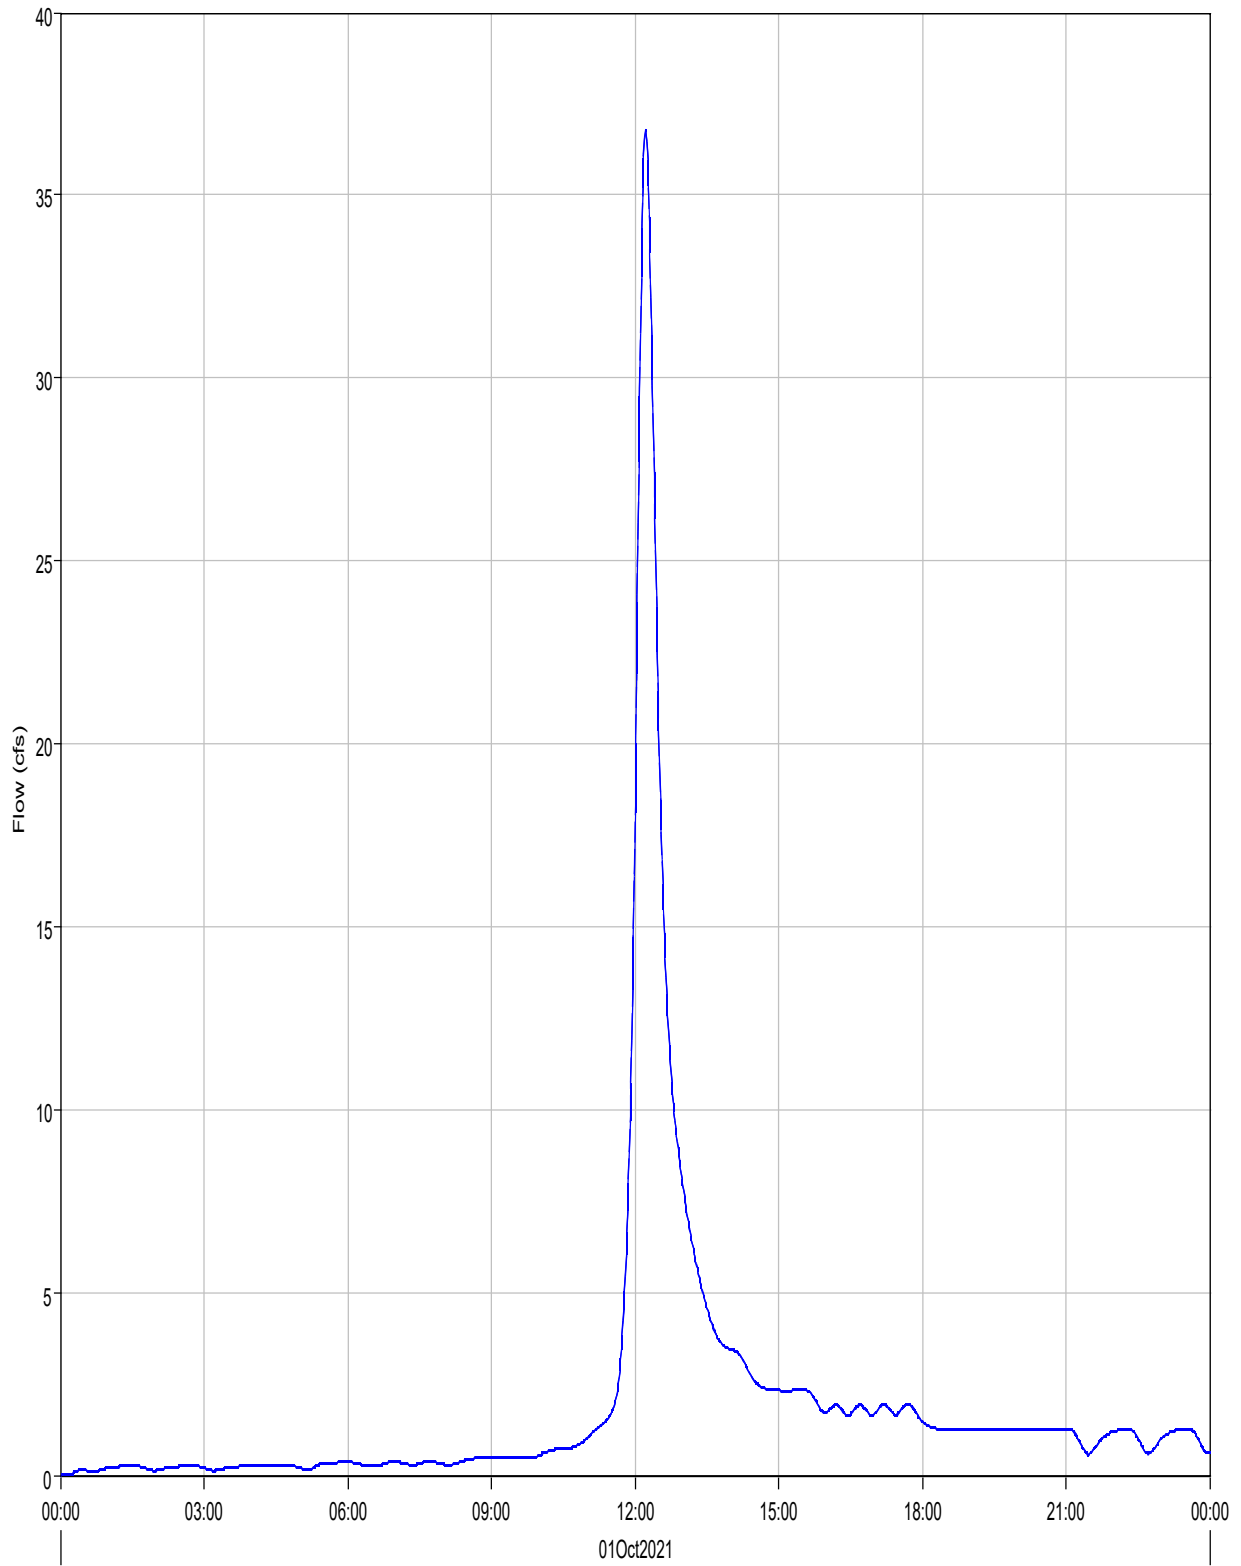

— Run:EV 5-yr Pr. Type II Element:P5 (CULV7) Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:P5 (CULV7) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: P5 (CULV7)


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	36.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	36.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	4.0 (AC-FT)	Total Outflow :	4.0 (AC-FT)

Junction "P6" Results for Run "EV 5-yr Pr. Type II"

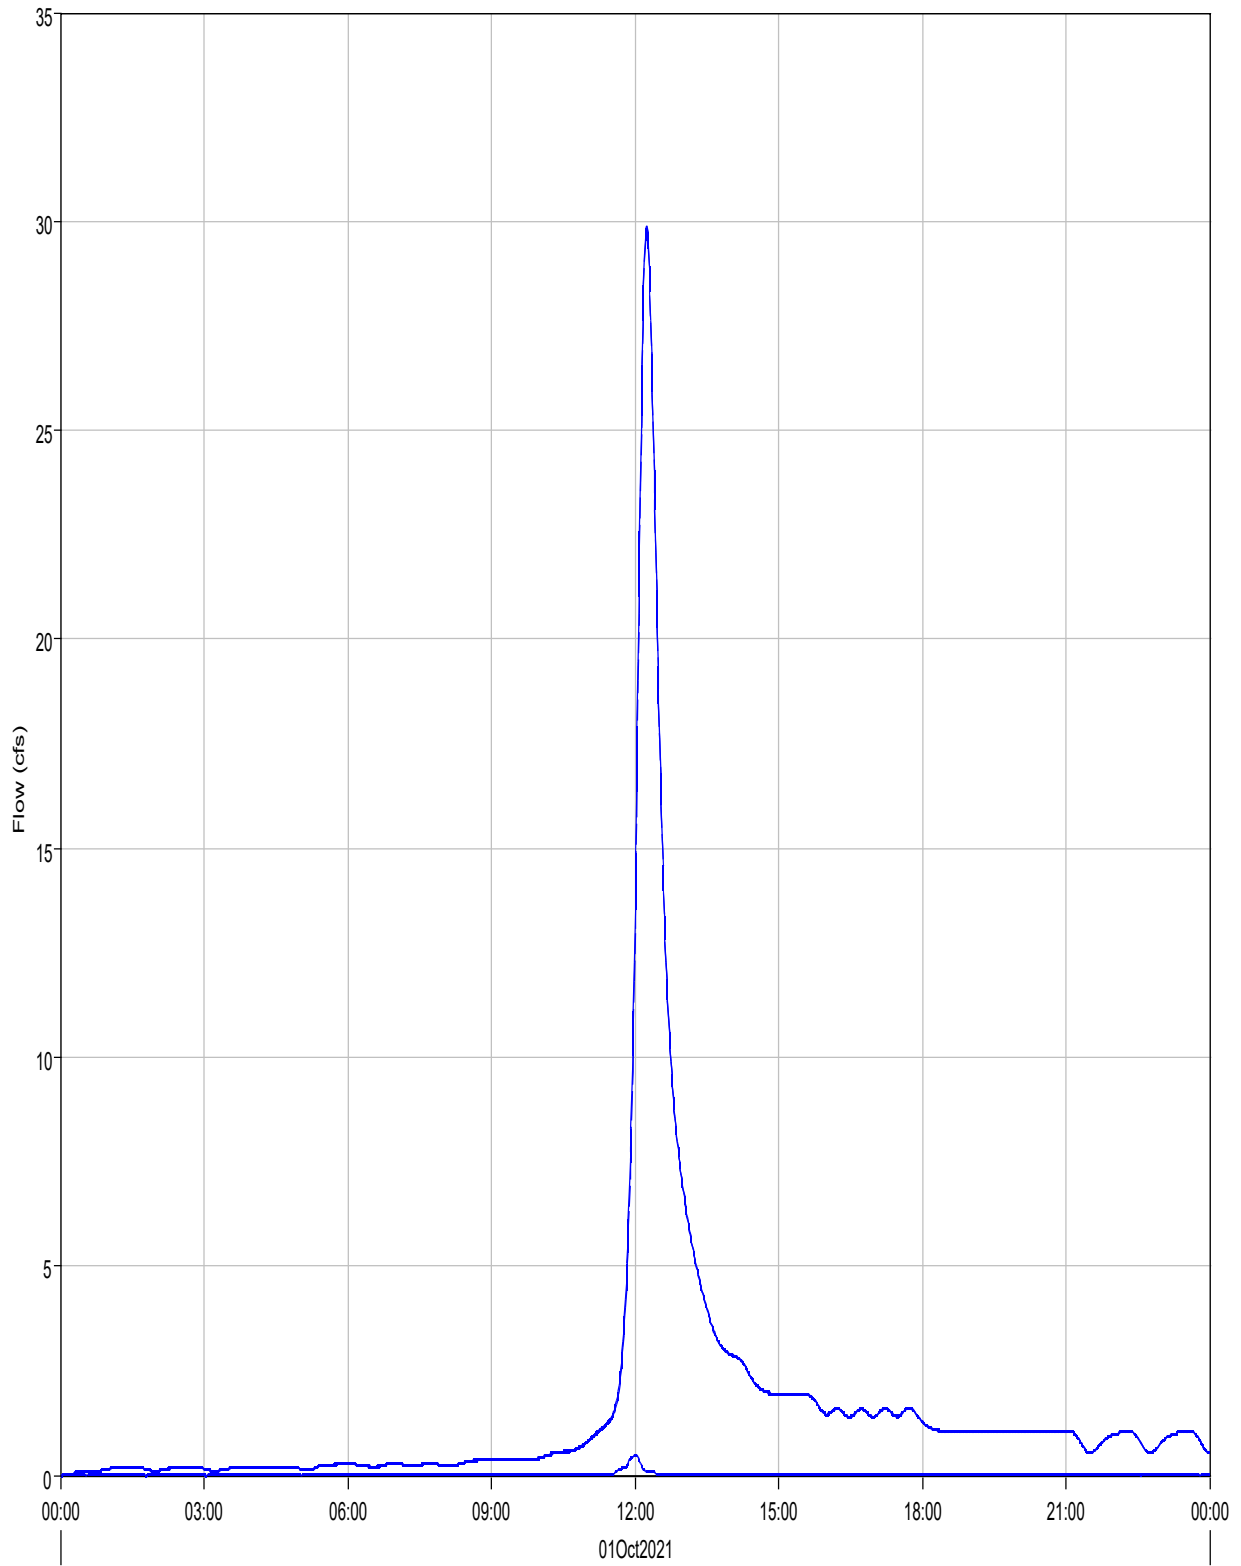

— Run:EV 5-yr Pr. Type II Element:P6 Result:Outflow - - - Run:EV 5-yr Pr. Type II Element:R-PB11 Result:Outflow ····· Run:EV 5-yr Pr. Type II Element:R-PB12-A Result:Outflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Junction: P6
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow :	29.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:15
Total Outflow :	3.3 (AC-FT)		

Reservoir "P7" Results for Run "EV 5-yr Pr. Type II"

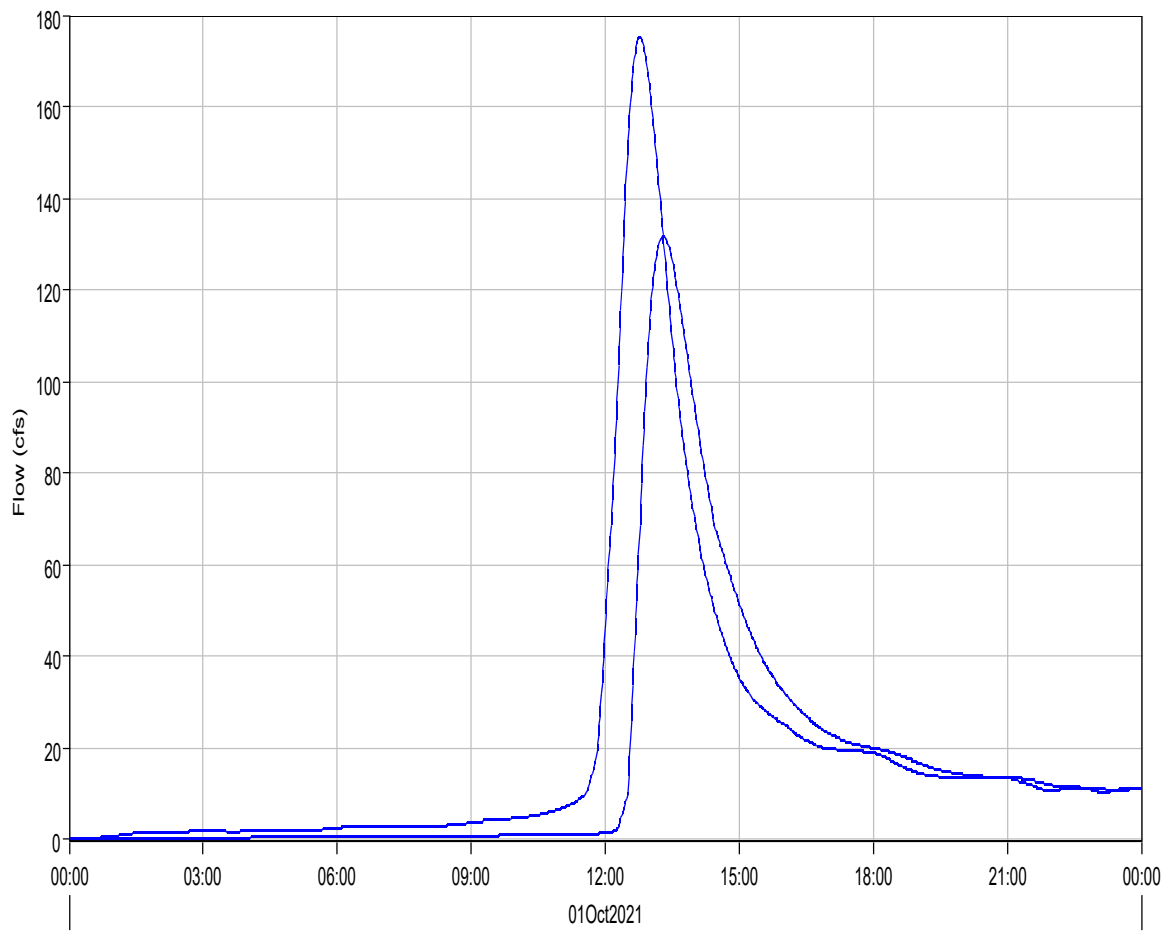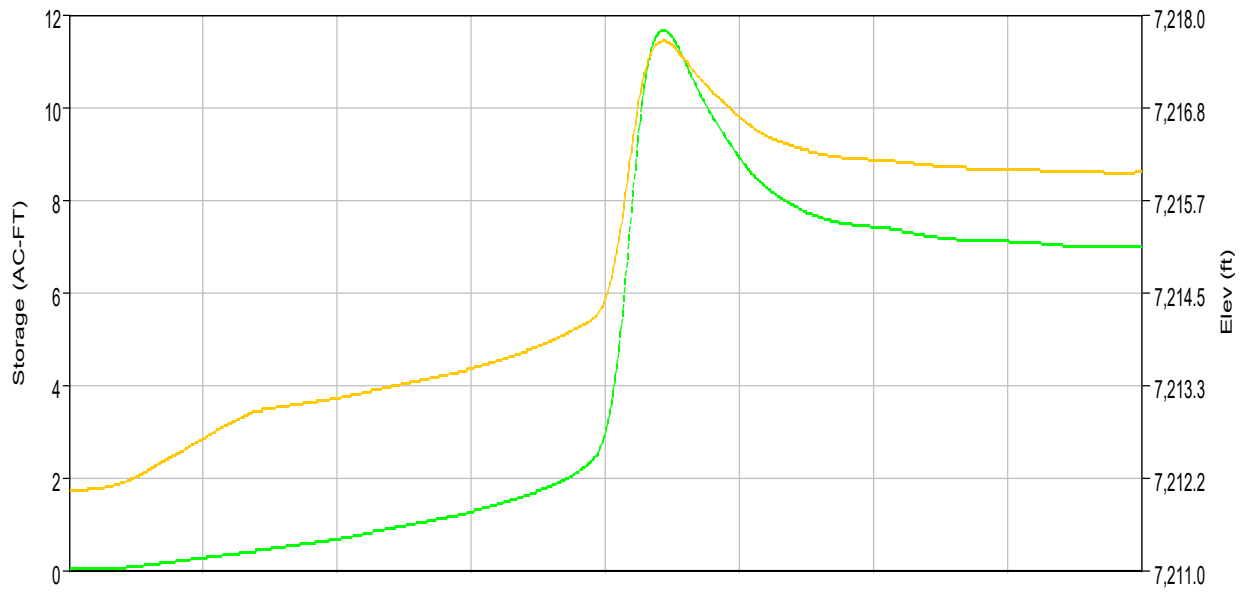

Run:EV 5-YR PR. TYPE II Element:P7 Result:Storage

Run:EV 5-YR PR. TYPE II Element:P7 Result:Pool Elevation

Run:EV 5-yr Pr. Type II Element:P7 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:P7 Result:Combined Flow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reservoir: P7
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	175.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:46
Peak Outflow :	131.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:18
Total Inflow :	40.1 (AC-FT)	Peak Storage :	11.7 (AC-FT)
Total Outflow :	33.2 (AC-FT)	Peak Elevation :	7217.7 (FT)

Junction "P8" Results for Run "EV 5-yr Pr. Type II"

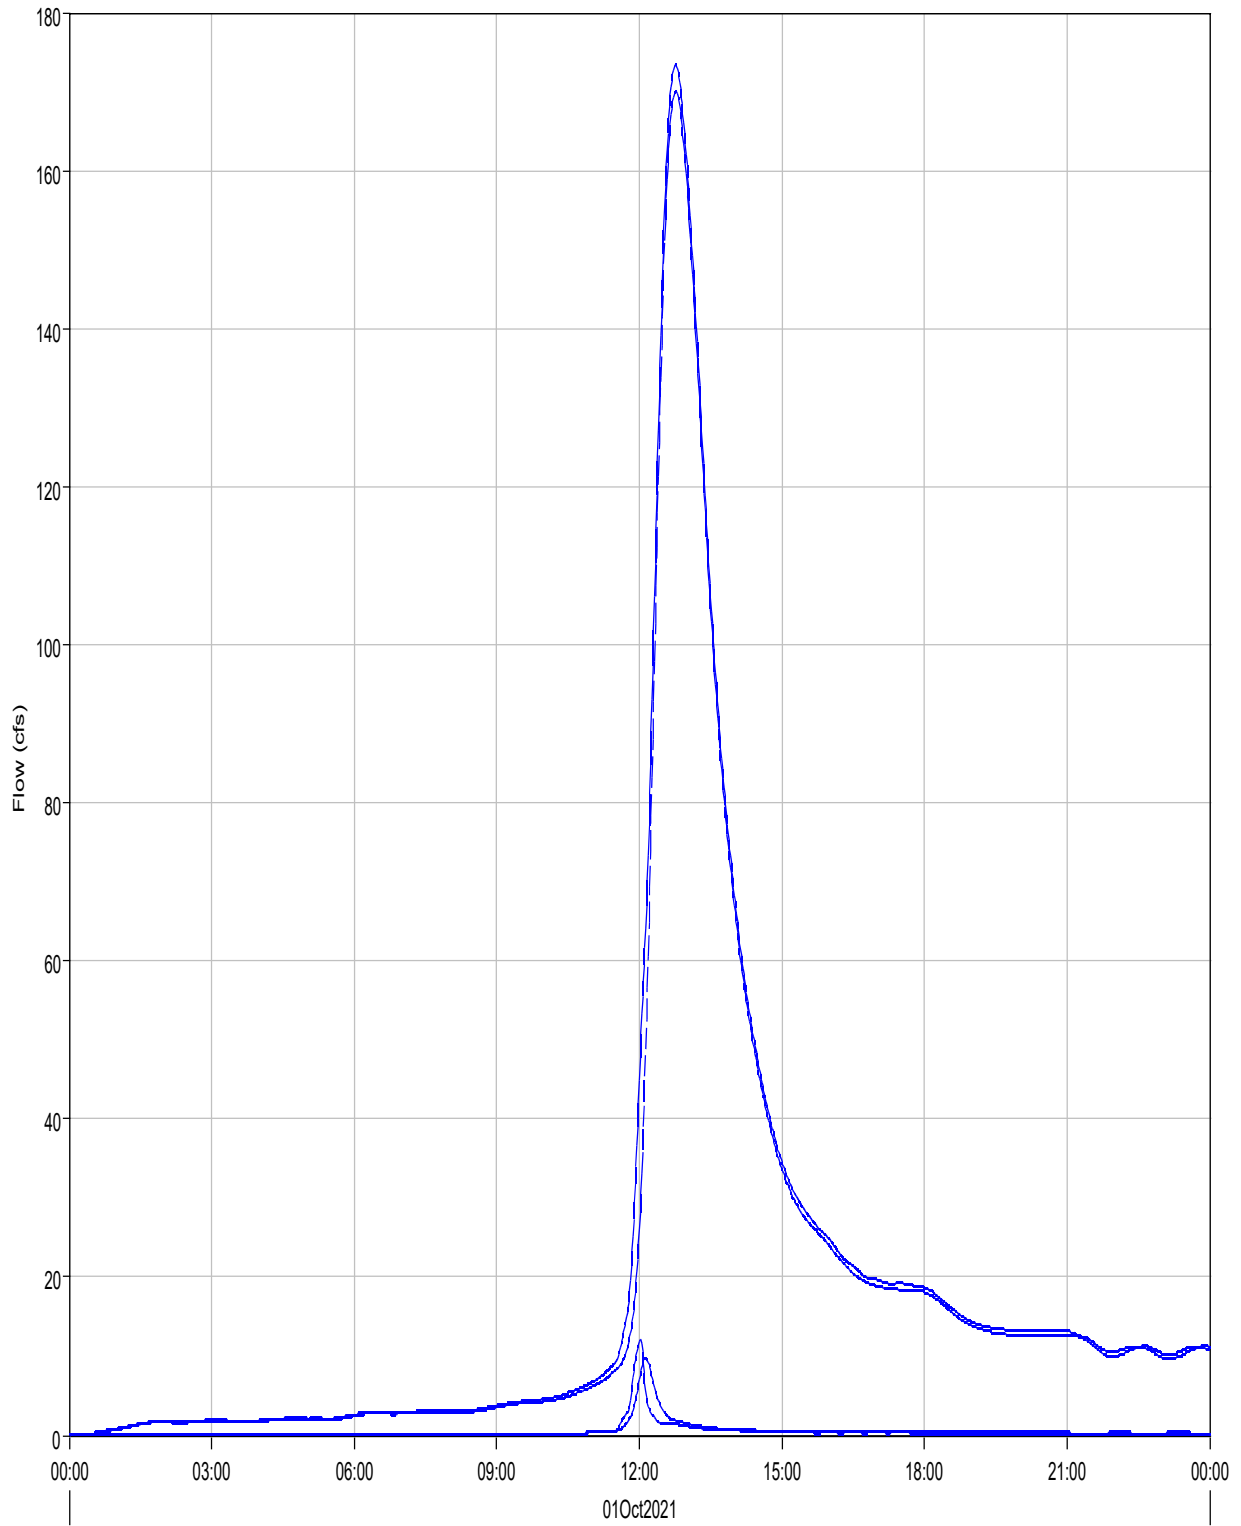

— Run:EV 5-yr Pr. Type II Element:P8 Result:Outflow - - - Run:EV 5-yr Pr. Type II Element:R-OB7 Result:Outflow ····· Run:EV 5-yr Pr. Type II Element:PB9 Result:Outflow
- · - · Run:EV 5-yr Pr. Type II Element:PB8 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Junction: P8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Outflow : 173.4 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:46
Total Outflow : 0.67 (IN)

Reach "P9 (CULV6)" Results for Run "EV 5-yr Pr. Type II"

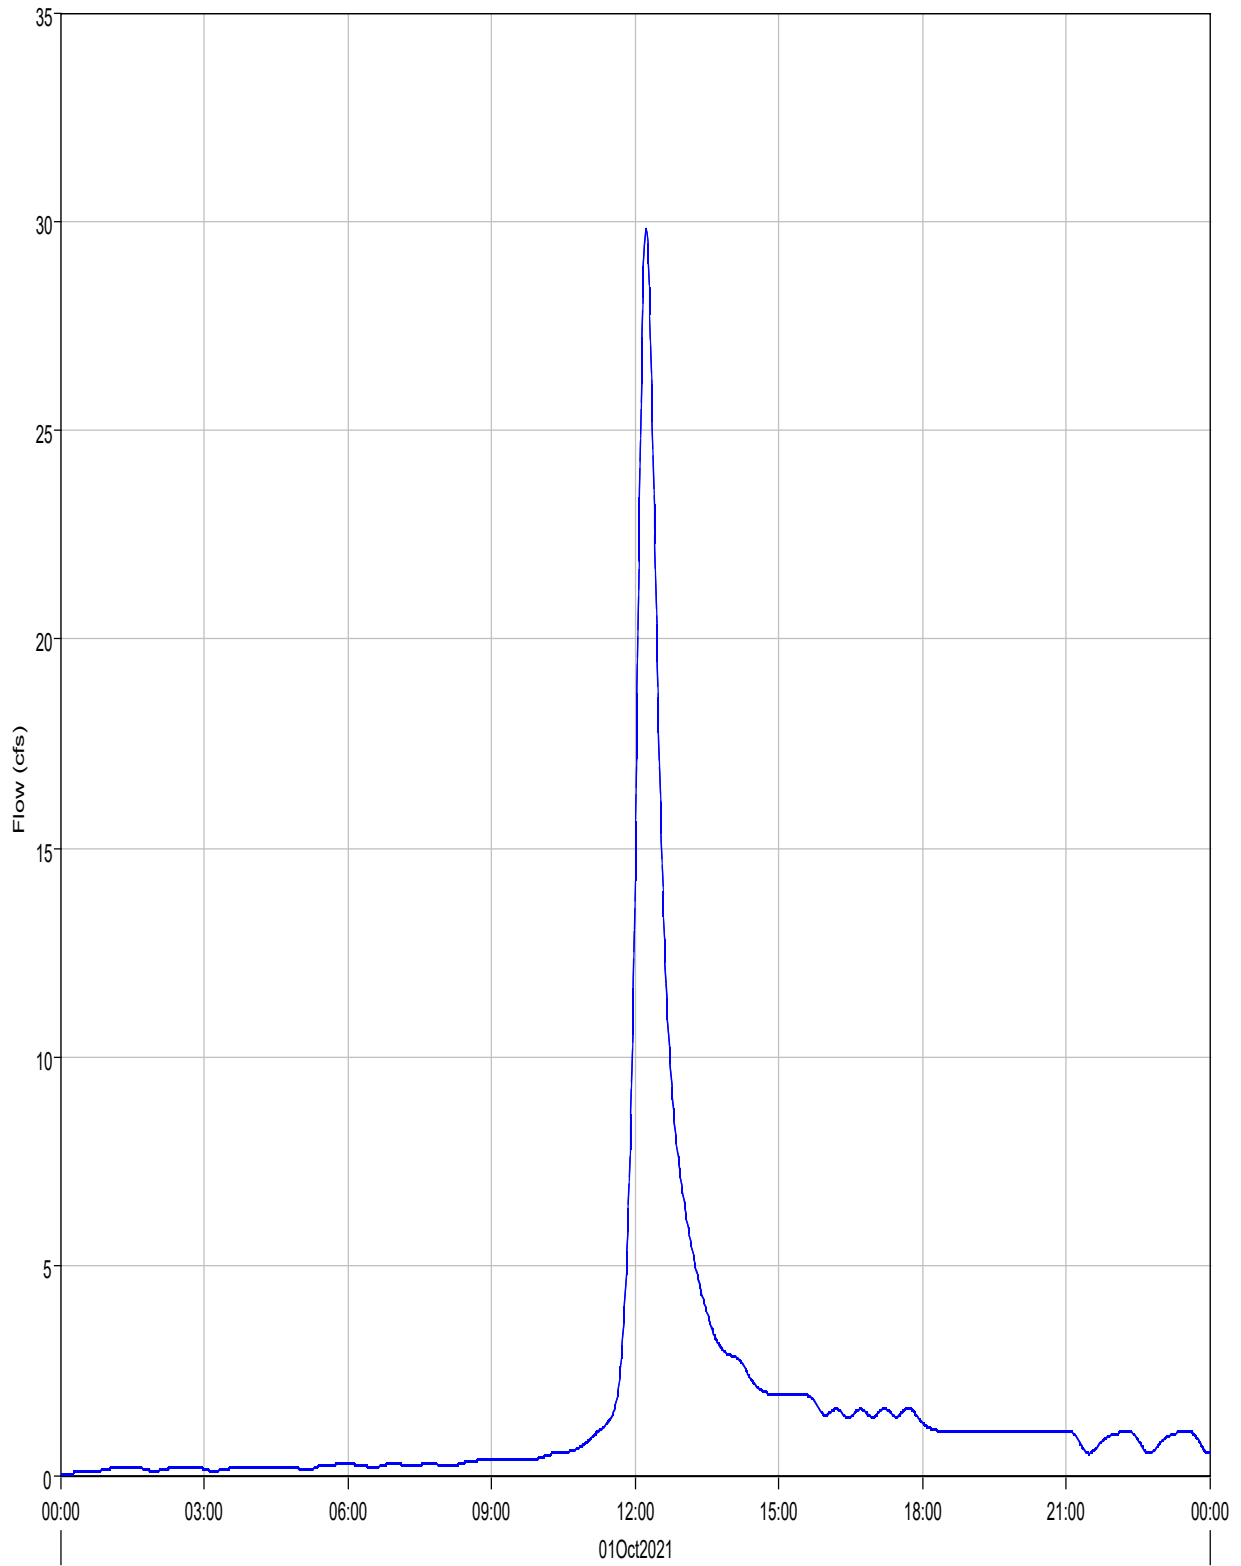

— Run:EV 5-yr Pr. Type II Element:P9 (CULV6) Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:P9 (CULV6) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: P9 (CULV6)


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	29.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:14
Peak Outflow :	29.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:14
Total Inflow :	0.80 (IN)	Total Outflow :	0.80 (IN)

Reach "P10 (CULV2)" Results for Run "EV 5-yr Pr. Type II"

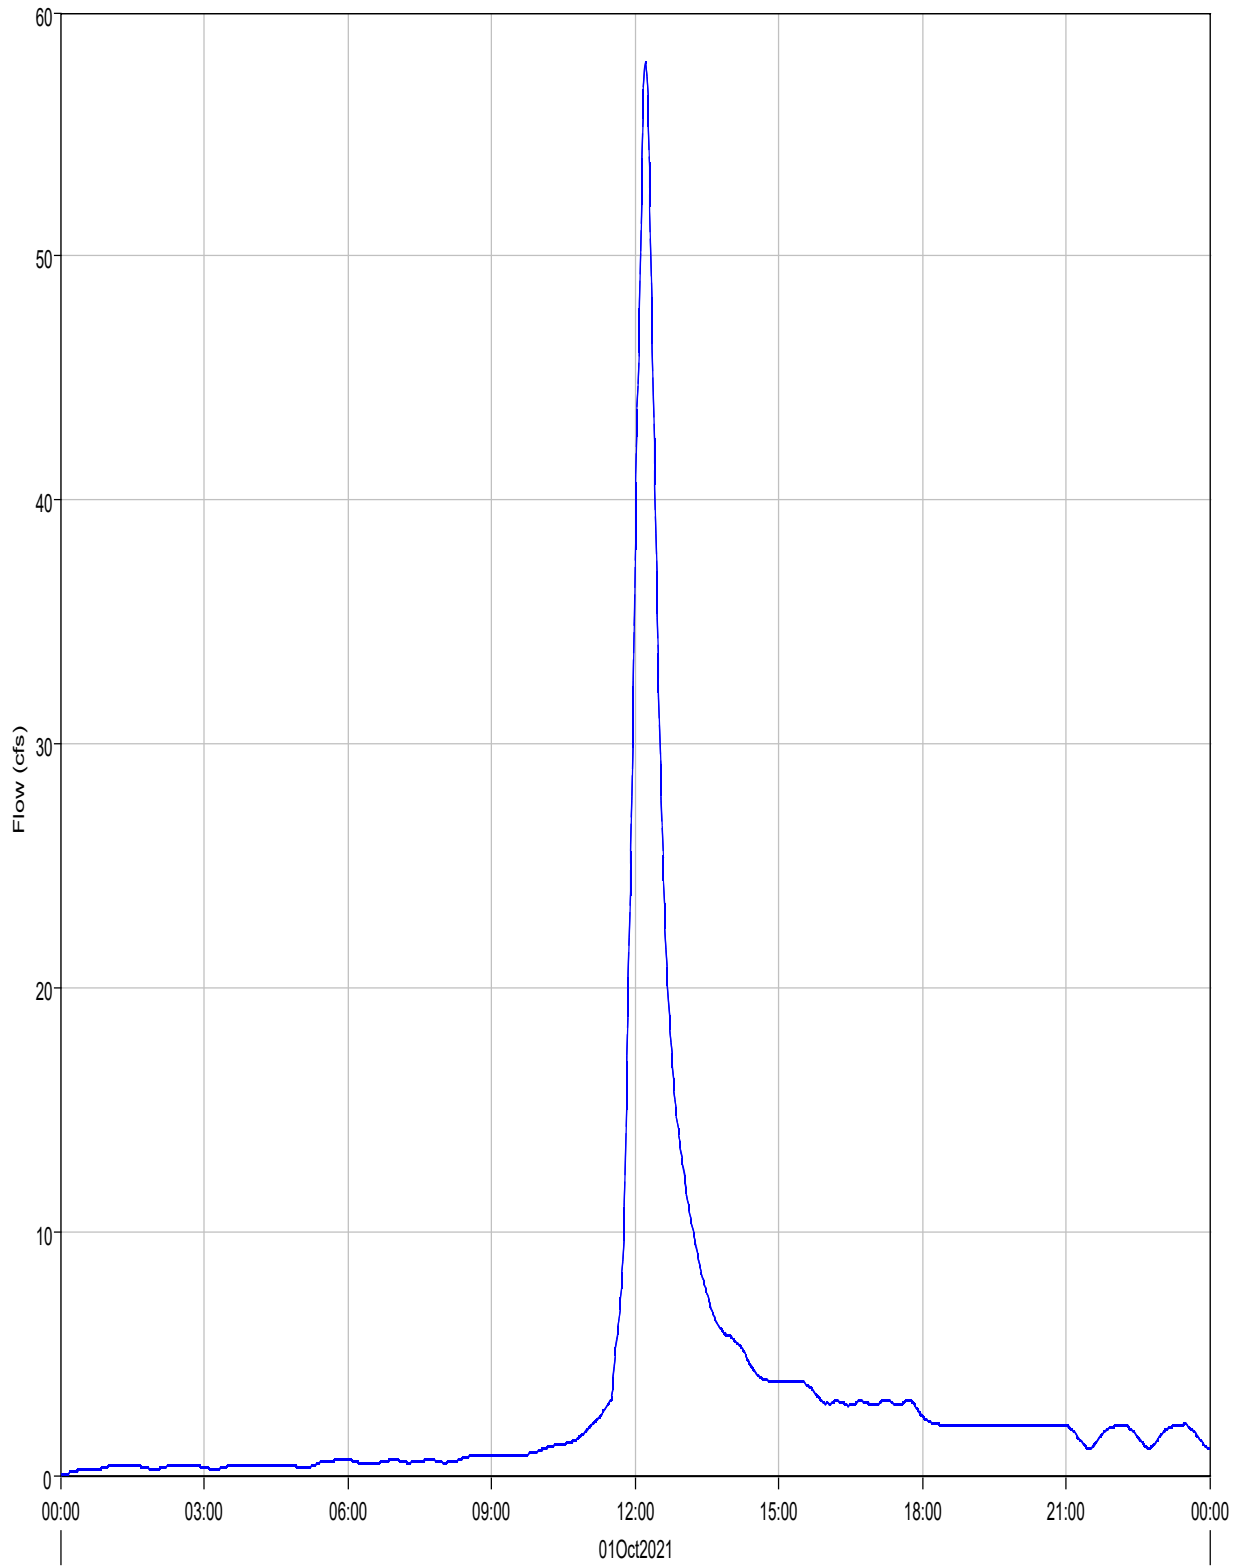

Run:EV 5-yr Pr. Type II Element:P10 (CULV2) Result:Outflow

Run:EV 5-YR PR. TYPE II Element:P10 (CULV2) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: P10 (CULV2)


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	58.0 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	57.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	6.7 (AC-FT)	Total Outflow :	6.7 (AC-FT)

Reach "P11 (CULV3)" Results for Run "EV 5-yr Pr. Type II"

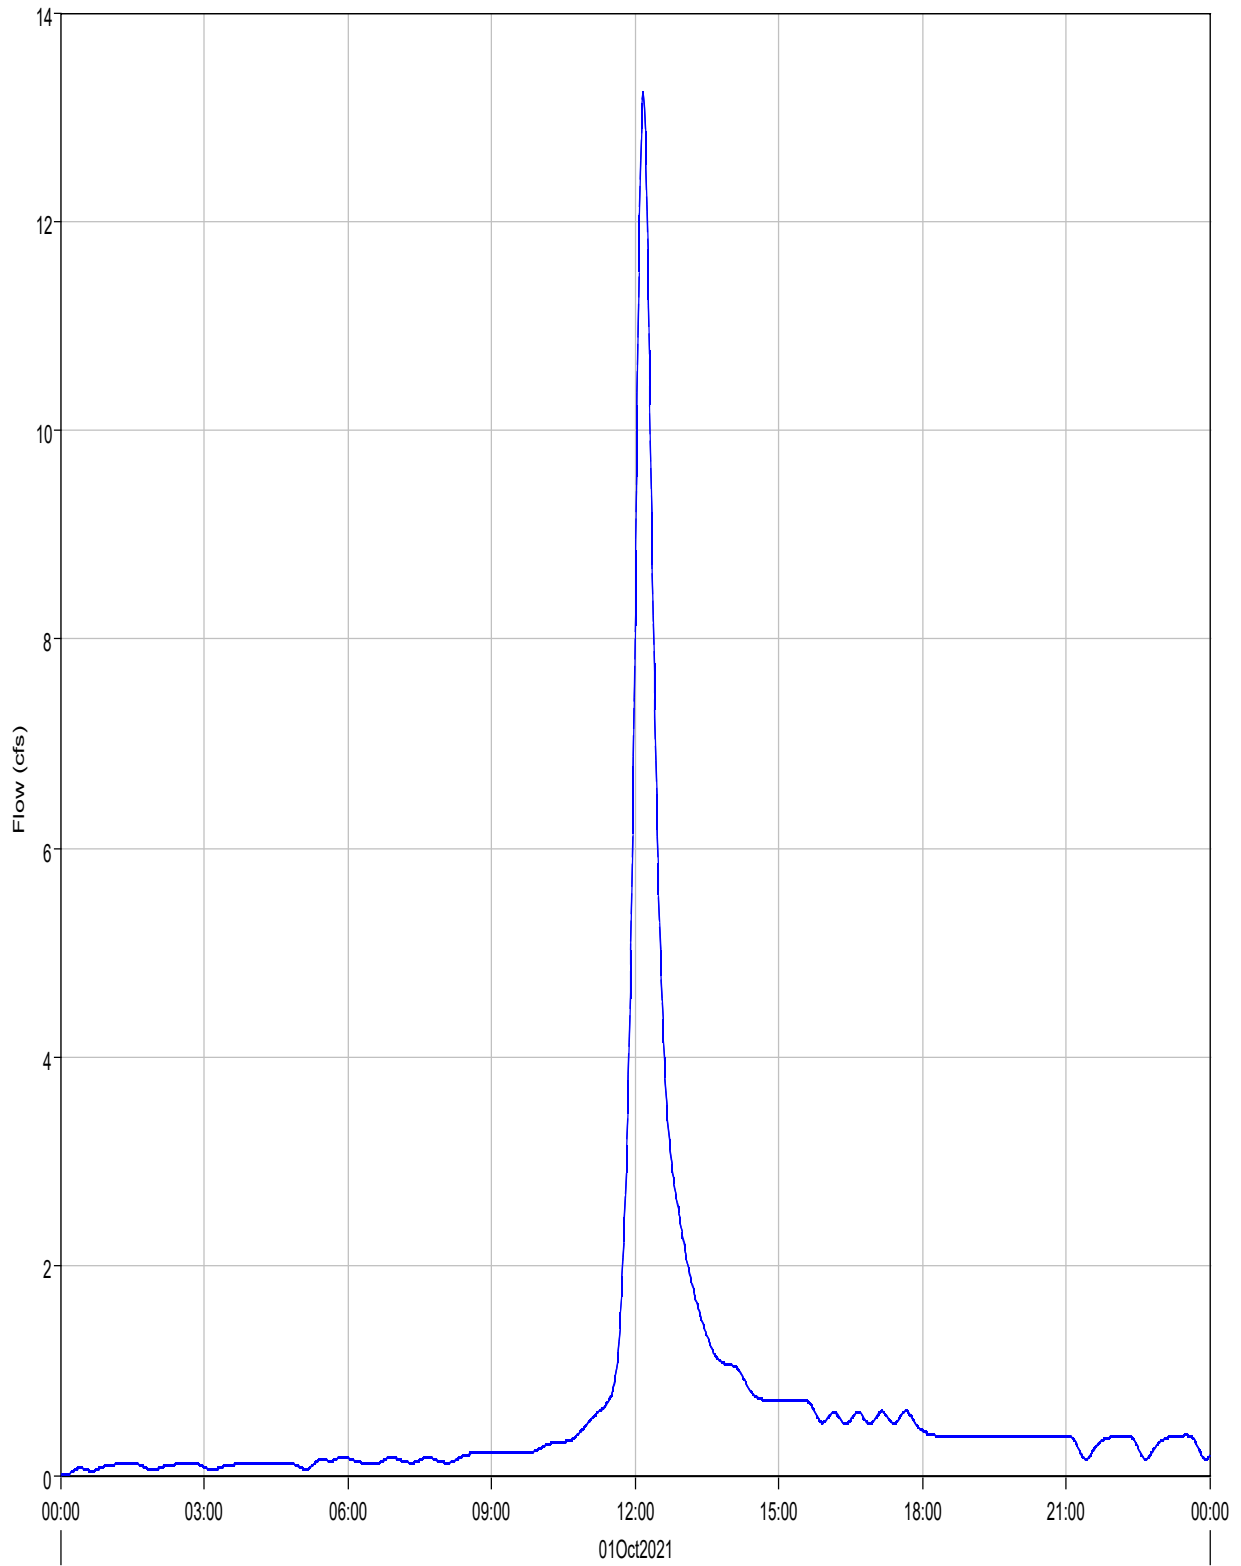

— Run:EV 5-yr Pr. Type II Element:P11 (CULV3) Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:P11 (CULV3) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: P11 (CULV3)


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	13.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:10
Peak Outflow :	13.2 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:10
Total Inflow :	1.3 (AC-FT)	Total Outflow :	1.3 (AC-FT)

Reach "P12 (CULV8)" Results for Run "EV 5-yr Pr. Type II"

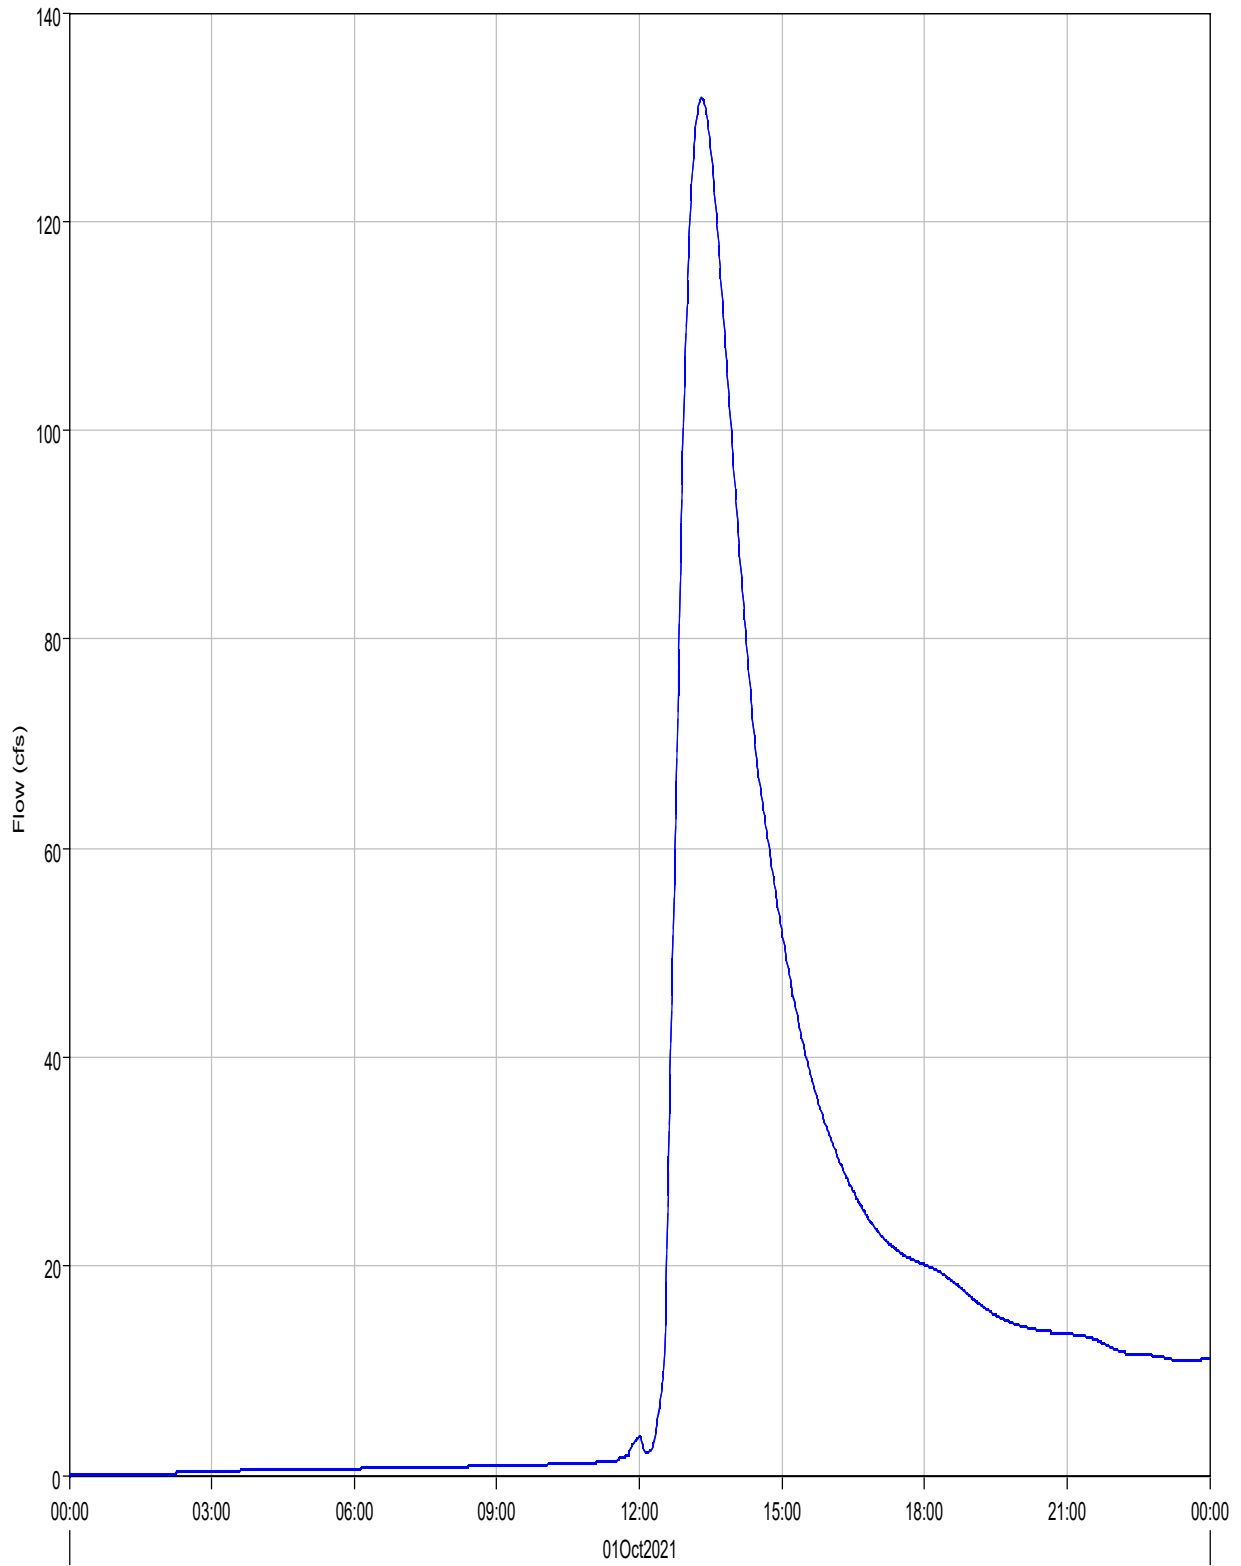

— Run:EV 5-yr Pr. Type II Element:P12 (CULV8) Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:P12 (CULV8) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: P12 (CULV8)



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	131.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 13:19
Peak Outflow :	131.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:19
Total Inflow :	0.55 (IN)	Total Outflow :	0.55 (IN)

Subbasin "PB1" Results for Run "EV 5-yr Pr. Type II"

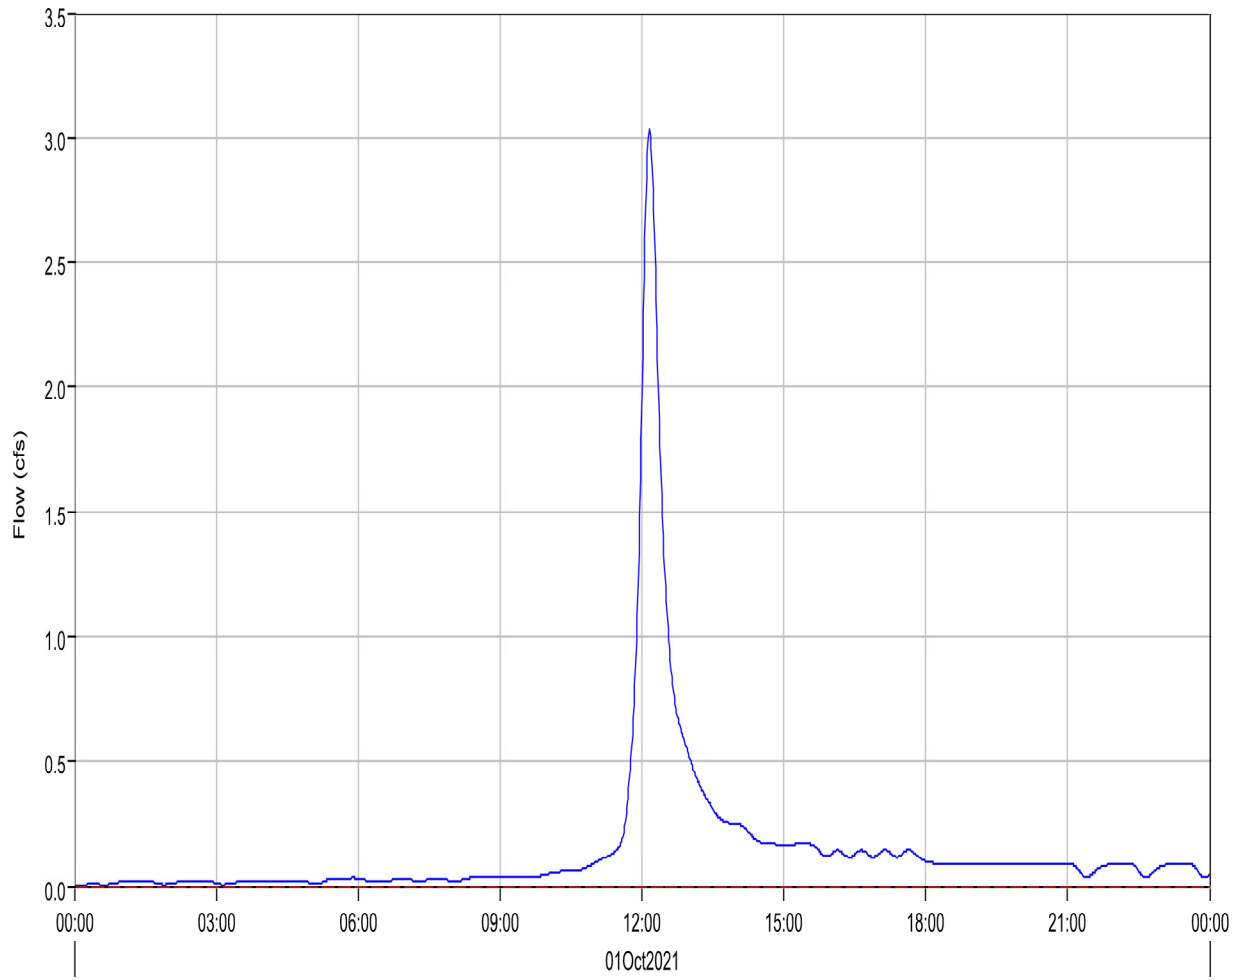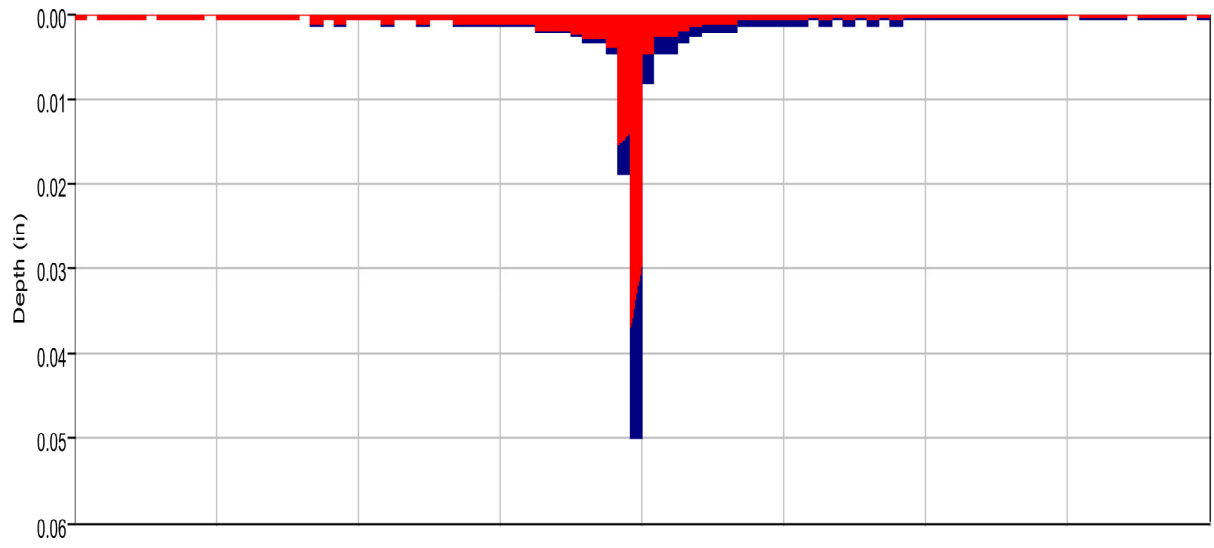

Run:EV 5-yr Pr. Type II Element:PB1 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB1 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB1 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB1 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	3.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	1.0 (AC-FT)	Total Direct Runoff :	0.3 (AC-FT)
Total Loss :	0.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.3 (AC-FT)	Discharge :	0.3 (AC-FT)

Subbasin "PB2" Results for Run "EV 5-yr Pr. Type II"

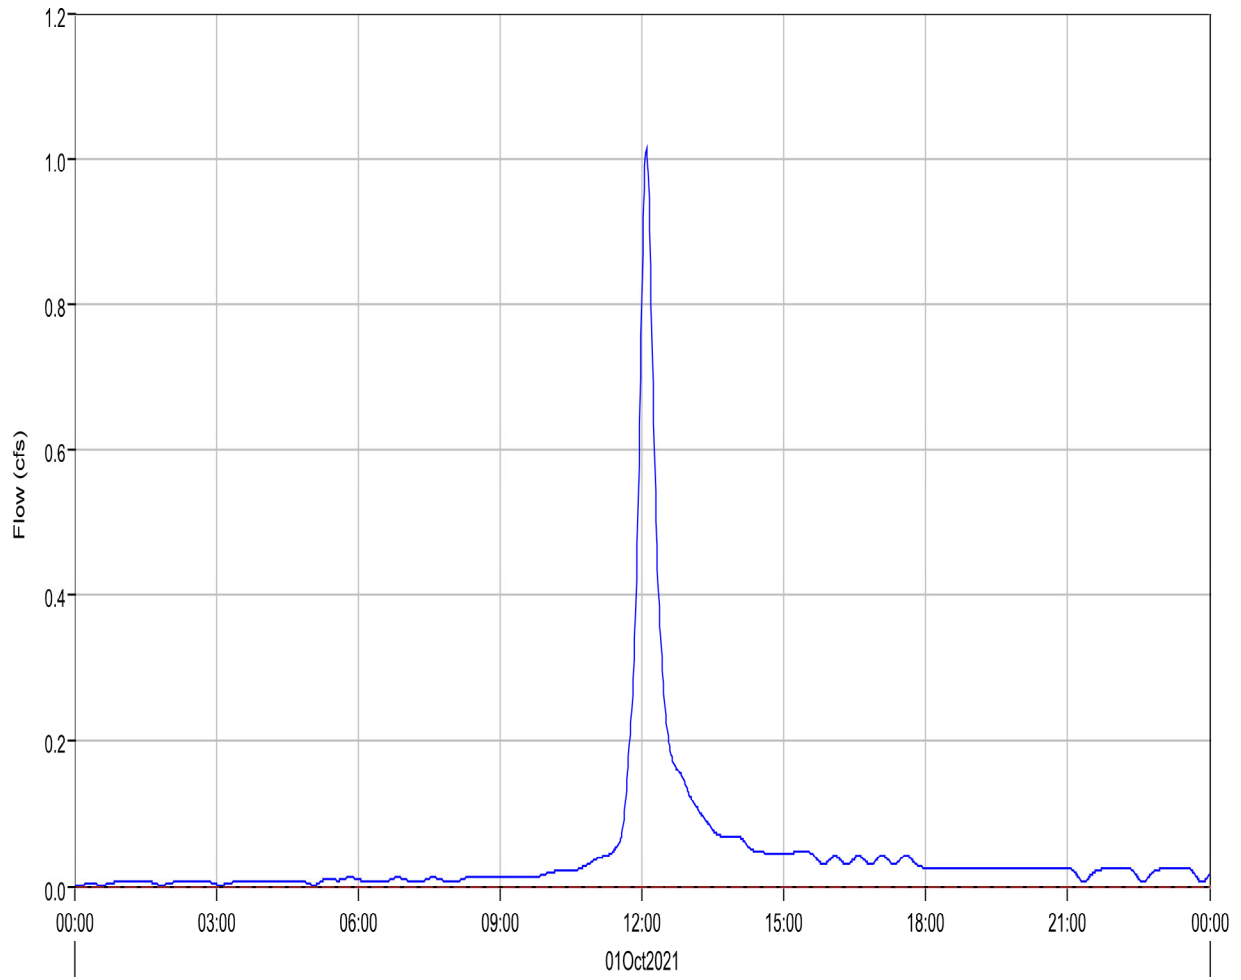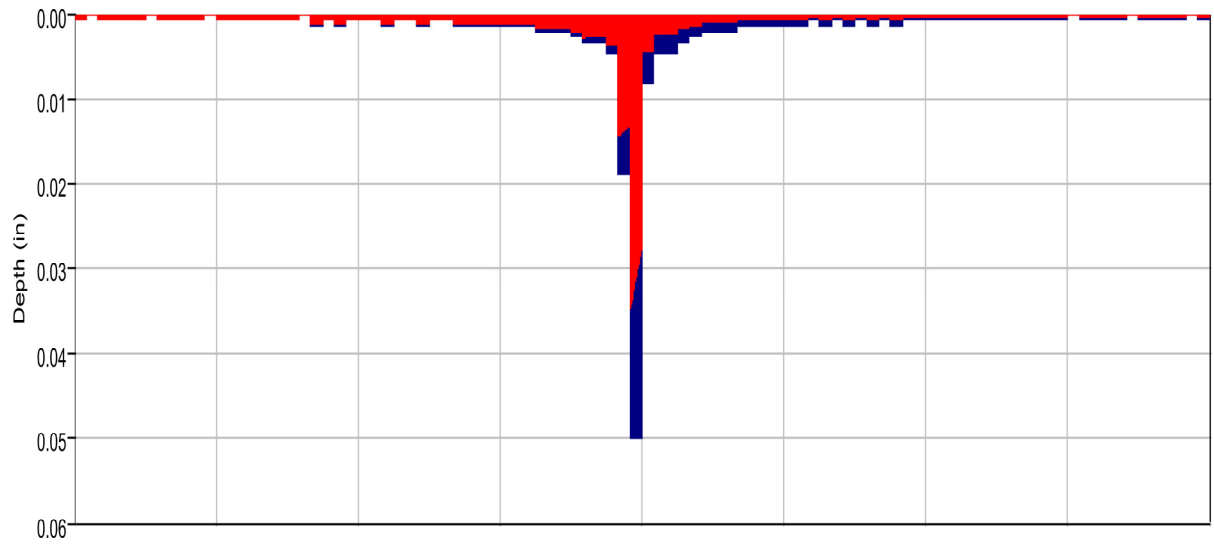

Run:EV 5-yr Pr. Type II Element:PB2 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB2 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB2 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB2 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	1.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:06
Total Precipitation :	0.2 (AC-FT)	Total Direct Runoff :	0.1 (AC-FT)
Total Loss :	0.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.1 (AC-FT)	Discharge :	0.1 (AC-FT)

Subbasin "PB3" Results for Run "EV 5-yr Pr. Type II"

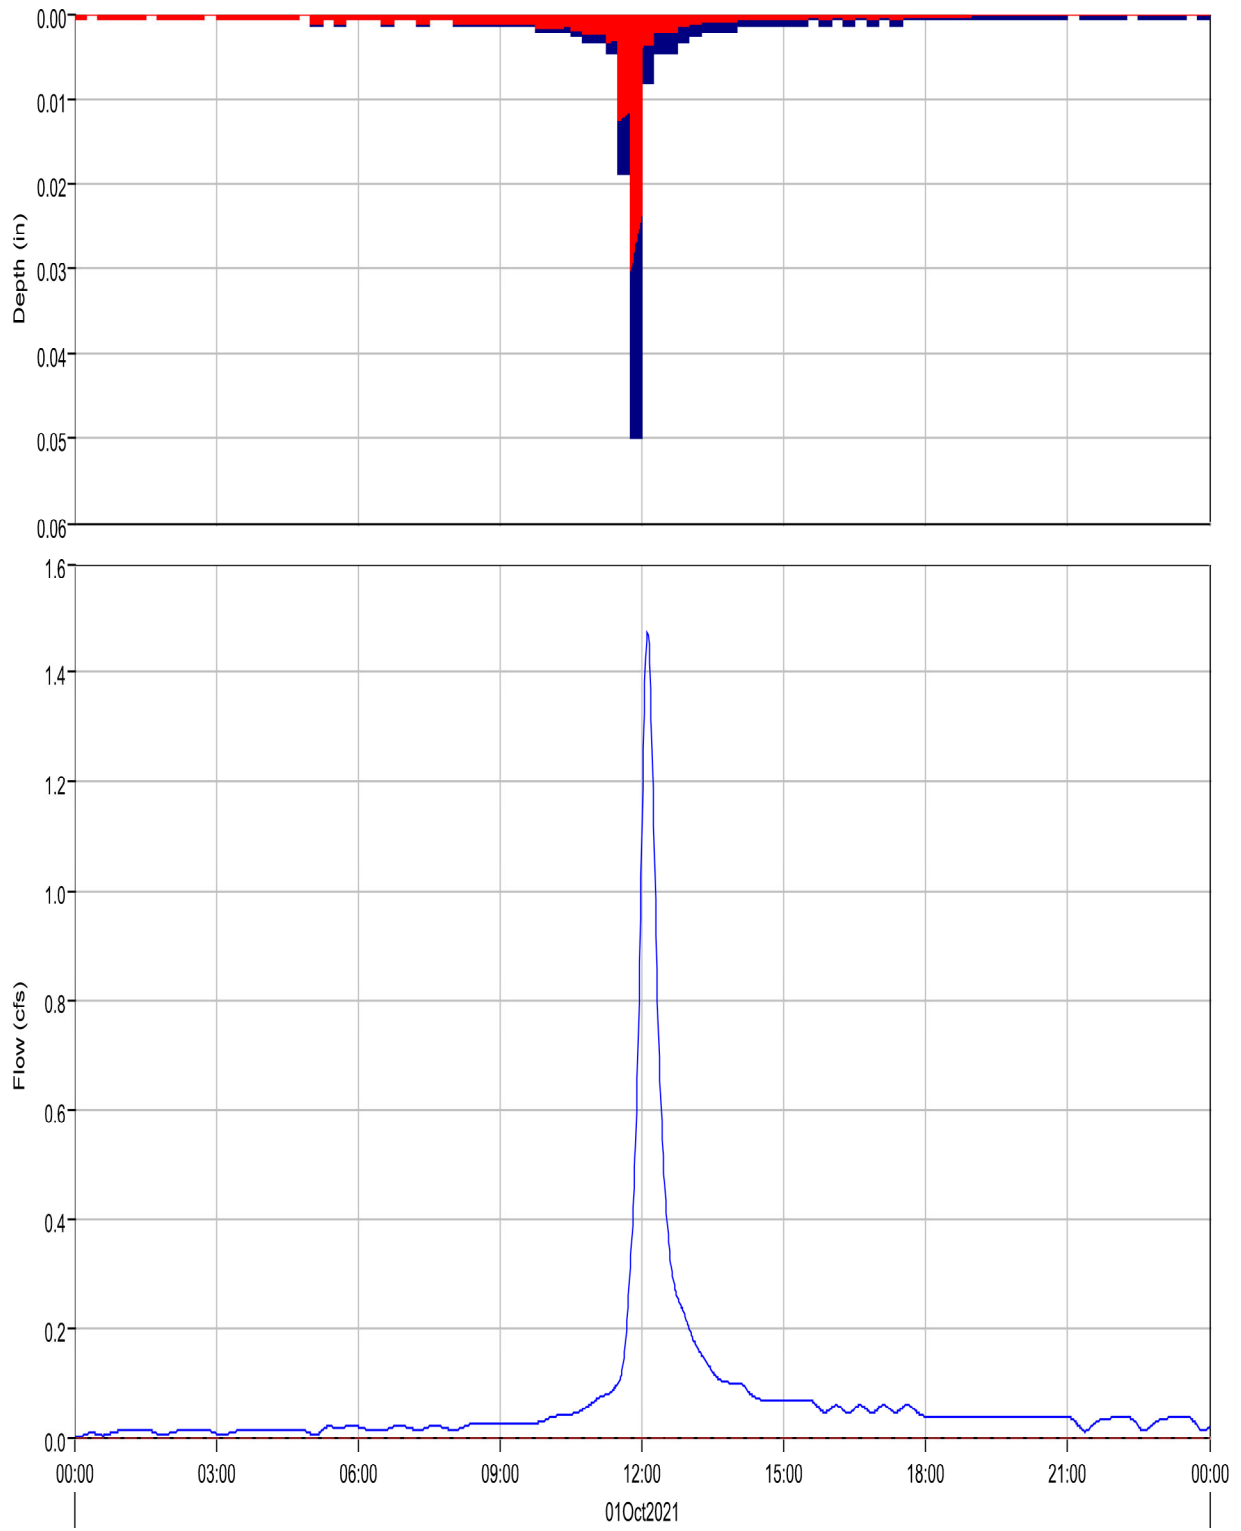

Run:EV 5-yr Pr. Type II Element:PB3 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB3 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB3 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB3 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	1.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:07
Total Precipitation :	0.3 (AC-FT)	Total Direct Runoff :	0.1 (AC-FT)
Total Loss :	0.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.1 (AC-FT)	Discharge :	0.1 (AC-FT)

Subbasin "PB4" Results for Run "EV 5-yr Pr. Type II"

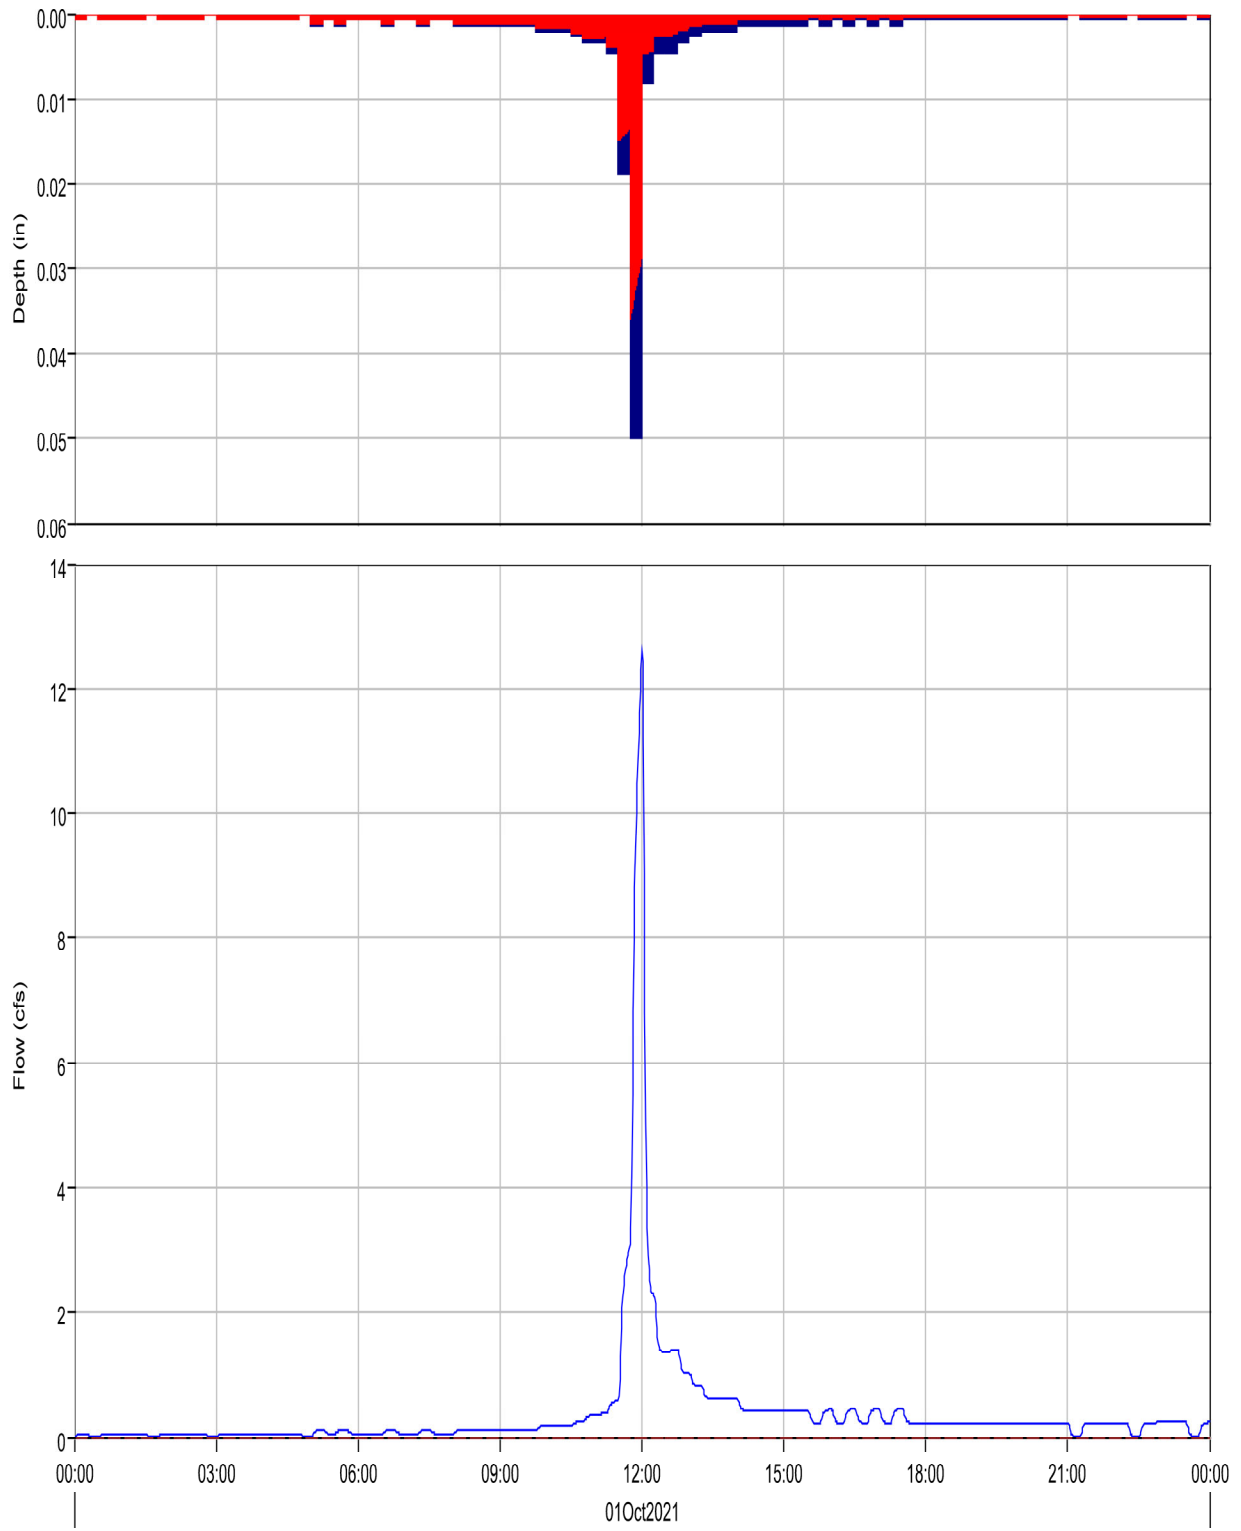

■ Run:EV 5-yr Pr. Type II Element:PB4 Result:Precipitation
— Run:EV 5-yr Pr. Type II Element:PB4 Result:Outflow

■ Run:EV 5-YR PR. TYPE II Element:PB4 Result:Precipitation Loss
- - - Run:EV 5-YR PR. TYPE II Element:PB4 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	12.6 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	2.4 (AC-FT)	Total Direct Runoff :	0.8 (AC-FT)
Total Loss :	1.6 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.8 (AC-FT)	Discharge :	0.8 (AC-FT)

Subbasin "PB5" Results for Run "EV 5-yr Pr. Type II"

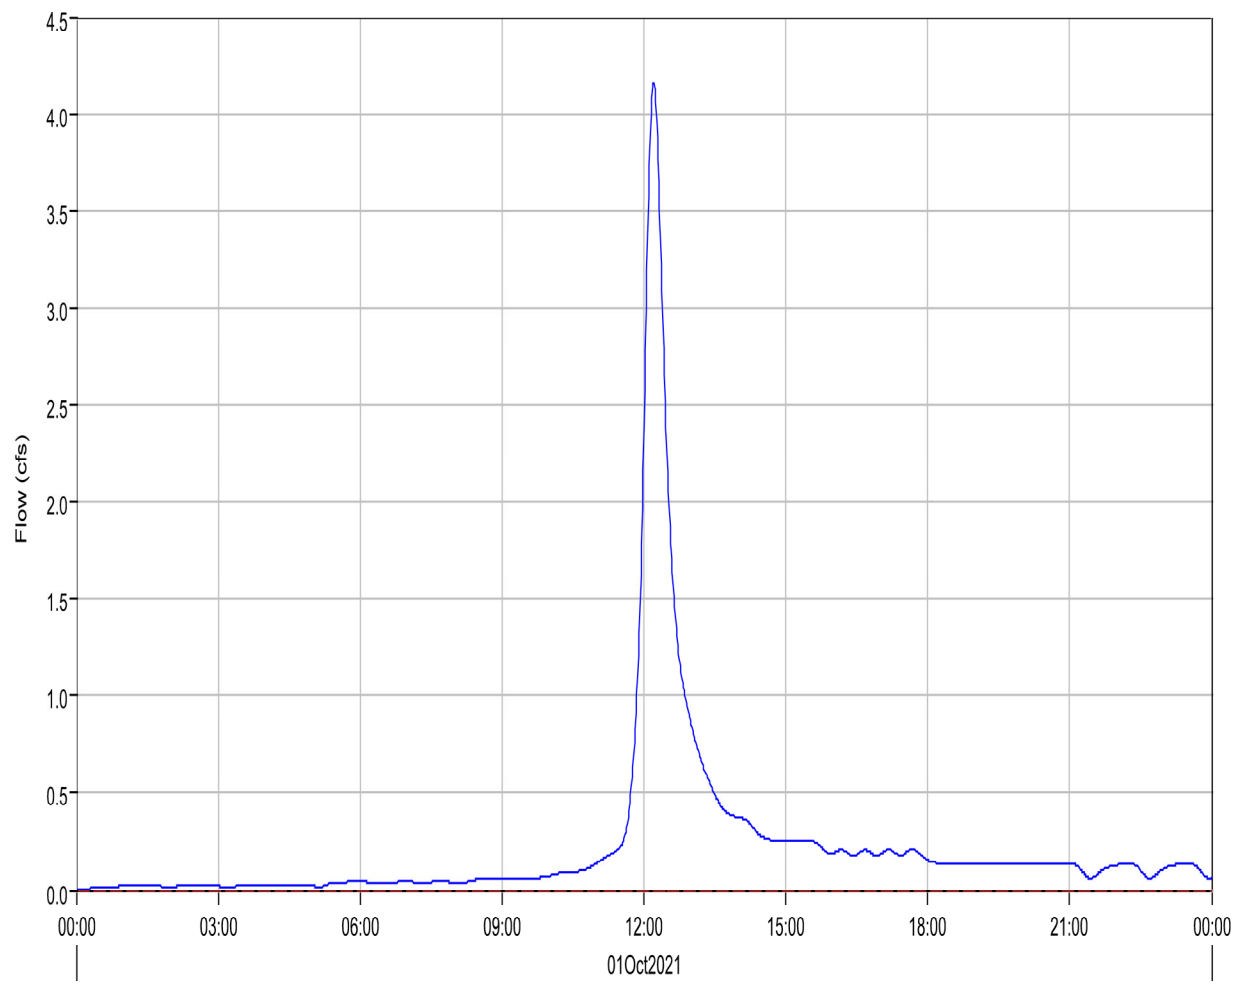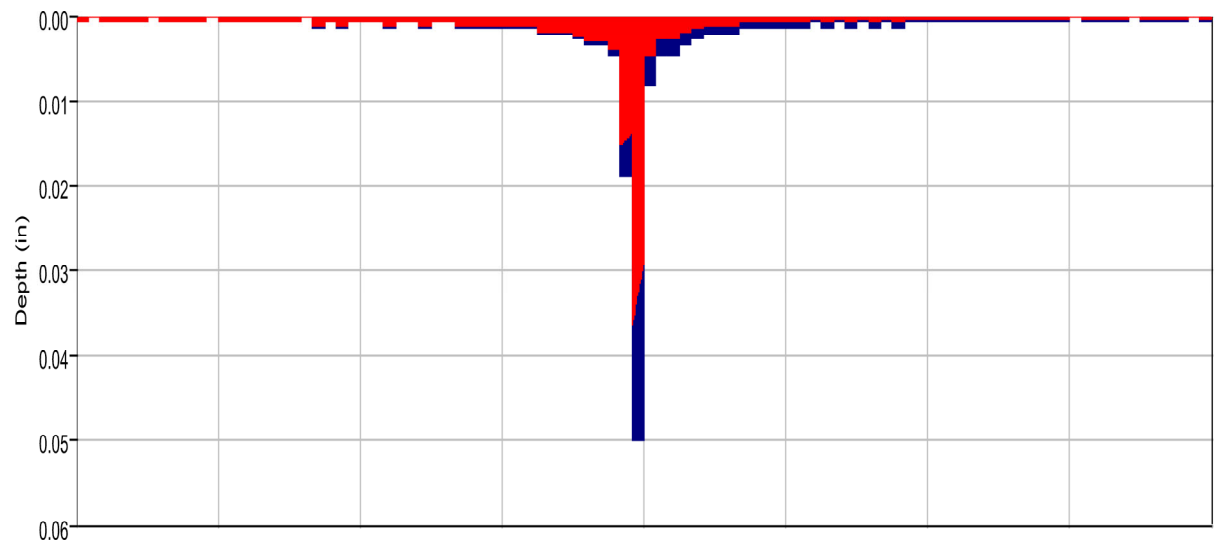

■ Run:EV 5-yr Pr. Type II Element:PB5 Result:Precipitation
— Run:EV 5-yr Pr. Type II Element:PB5 Result:Outflow

■ Run:EV 5-YR PR. TYPE II Element:PB5 Result:Precipitation Loss
- - - Run:EV 5-YR PR. TYPE II Element:PB5 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB5
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	4.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:12
Total Precipitation :	1.4 (AC-FT)	Total Direct Runoff :	0.5 (AC-FT)
Total Loss :	0.9 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.5 (AC-FT)	Discharge :	0.5 (AC-FT)

Subbasin "PB6" Results for Run "EV 5-yr Pr. Type II"

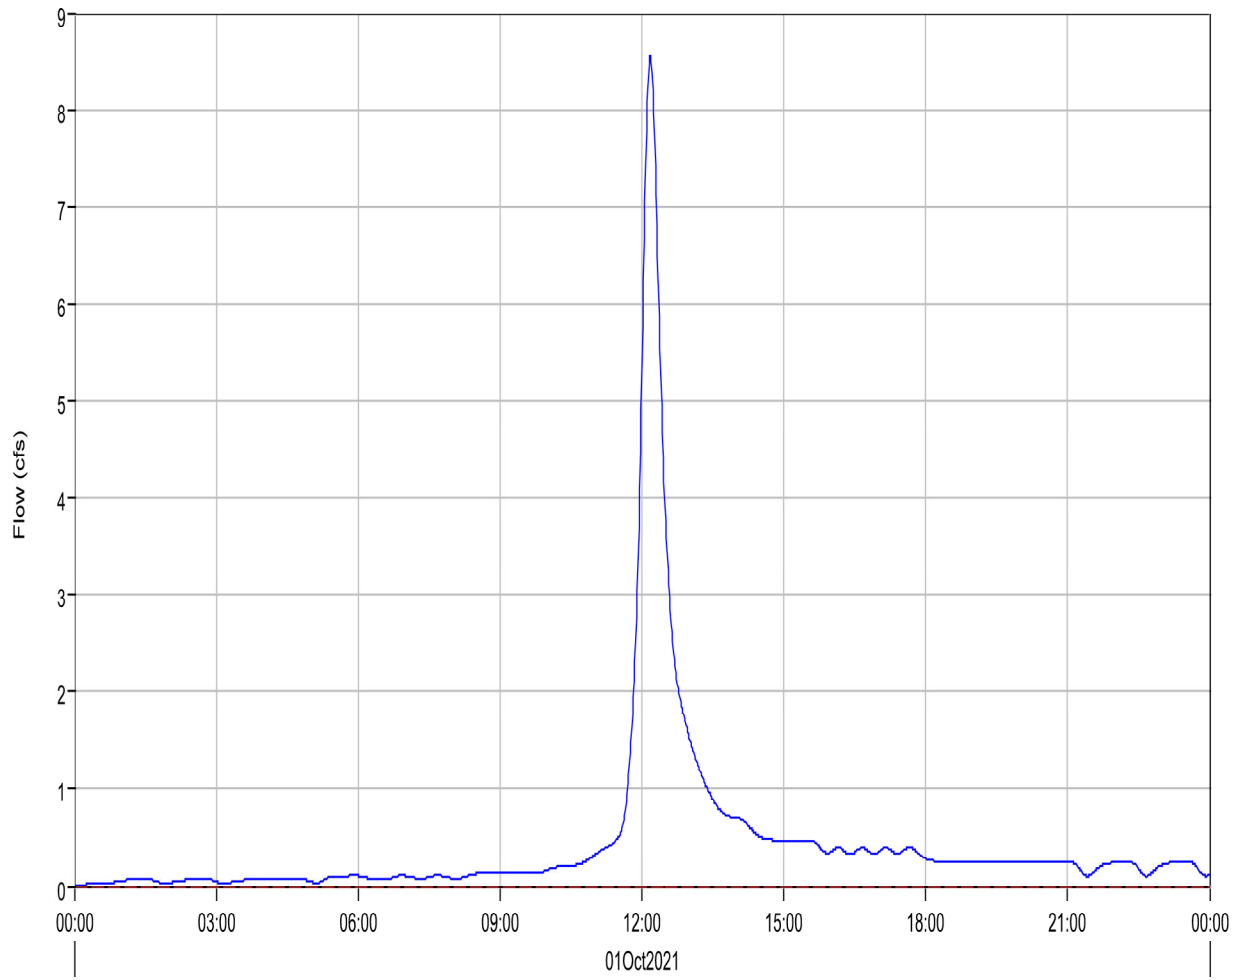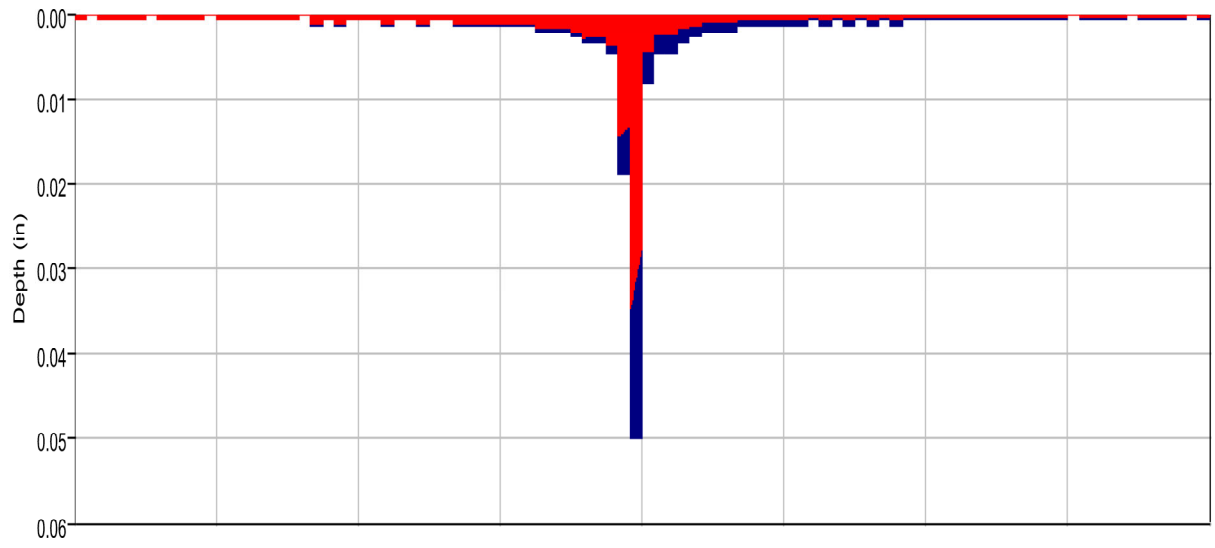

- Run:EV 5-yr Pr. Type II Element:PB6 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:PB6 Result:Precipitation Loss
- Run:EV 5-yr Pr. Type II Element:PB6 Result:Outflow
- Run:EV 5-yr Pr. Type II Element:PB6 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB6
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	8.6 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:11
Total Precipitation :	2.5 (AC-FT)	Total Direct Runoff :	0.9 (AC-FT)
Total Loss :	1.6 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.9 (AC-FT)	Discharge :	0.9 (AC-FT)

Subbasin "PB7" Results for Run "EV 5-yr Pr. Type II"

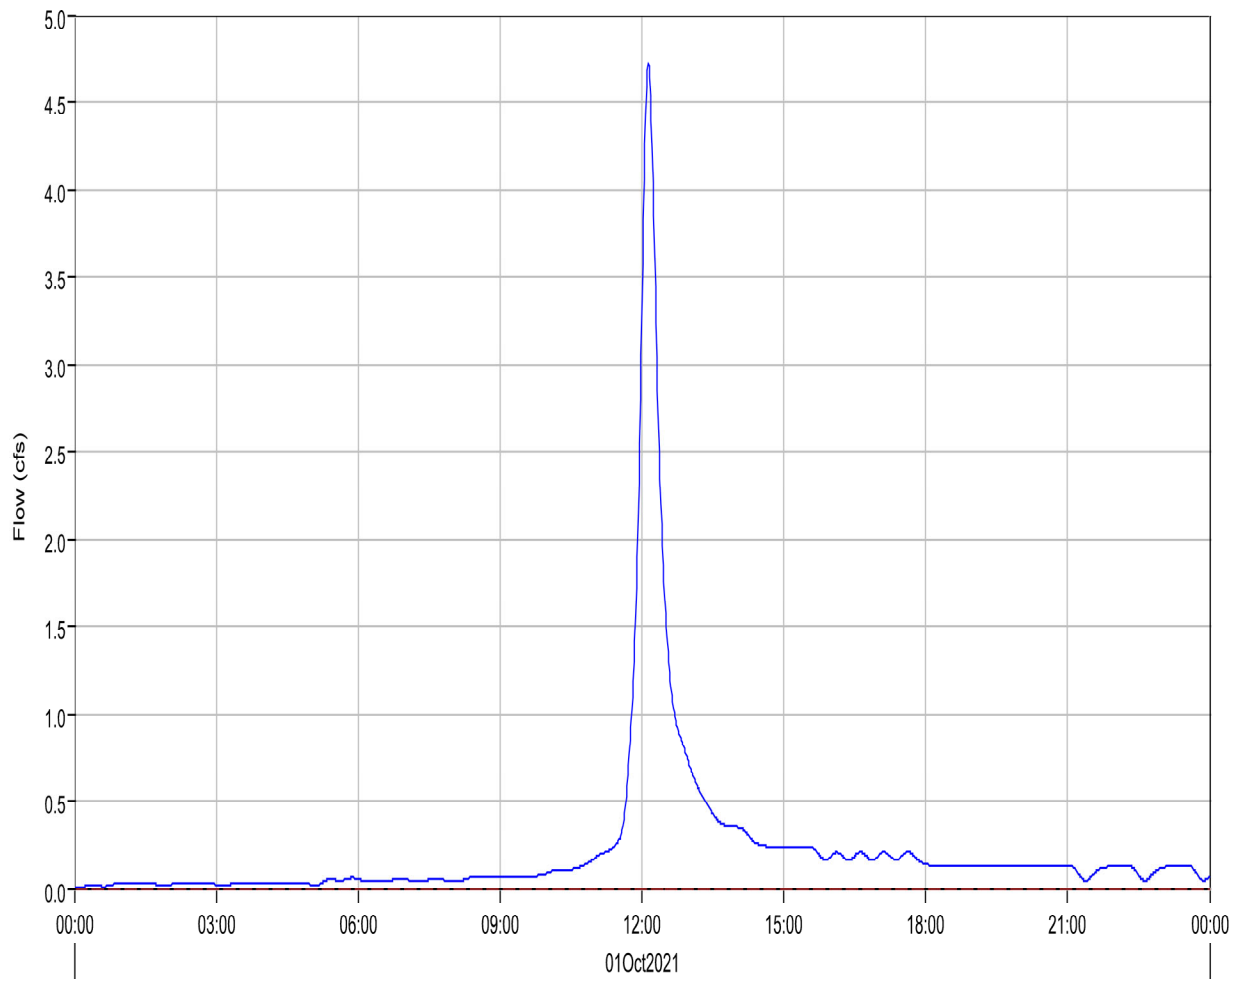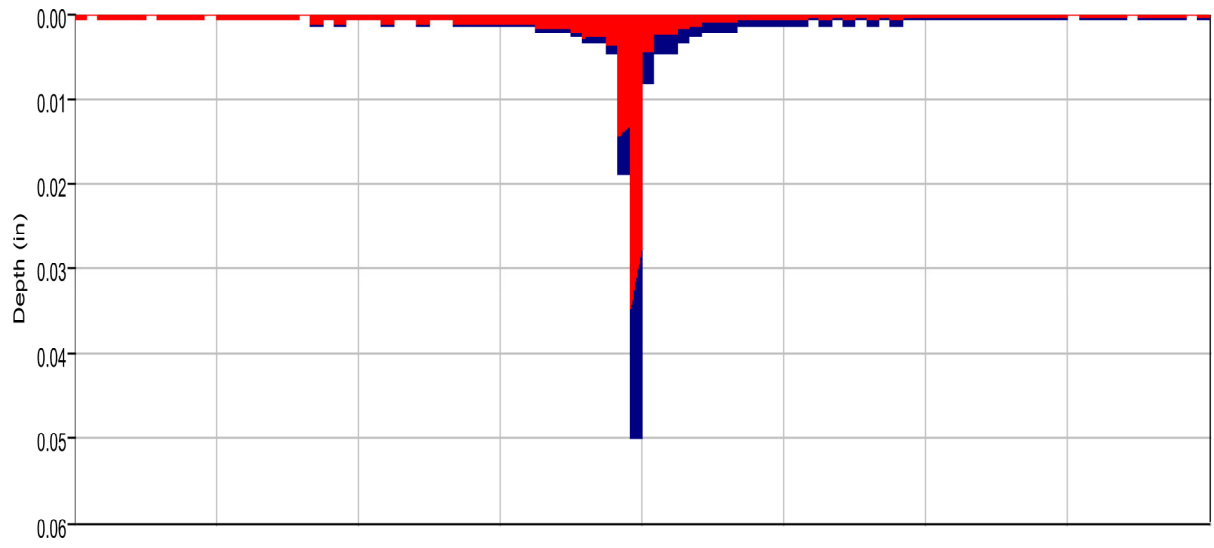

Run:EV 5-yr Pr. Type II Element:PB7 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB7 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB7 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB7 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB7
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	4.7 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	1.3 (AC-FT)	Total Direct Runoff :	0.4 (AC-FT)
Total Loss :	0.8 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.4 (AC-FT)	Discharge :	0.4 (AC-FT)

Subbasin "PB8" Results for Run "EV 5-yr Pr. Type II"

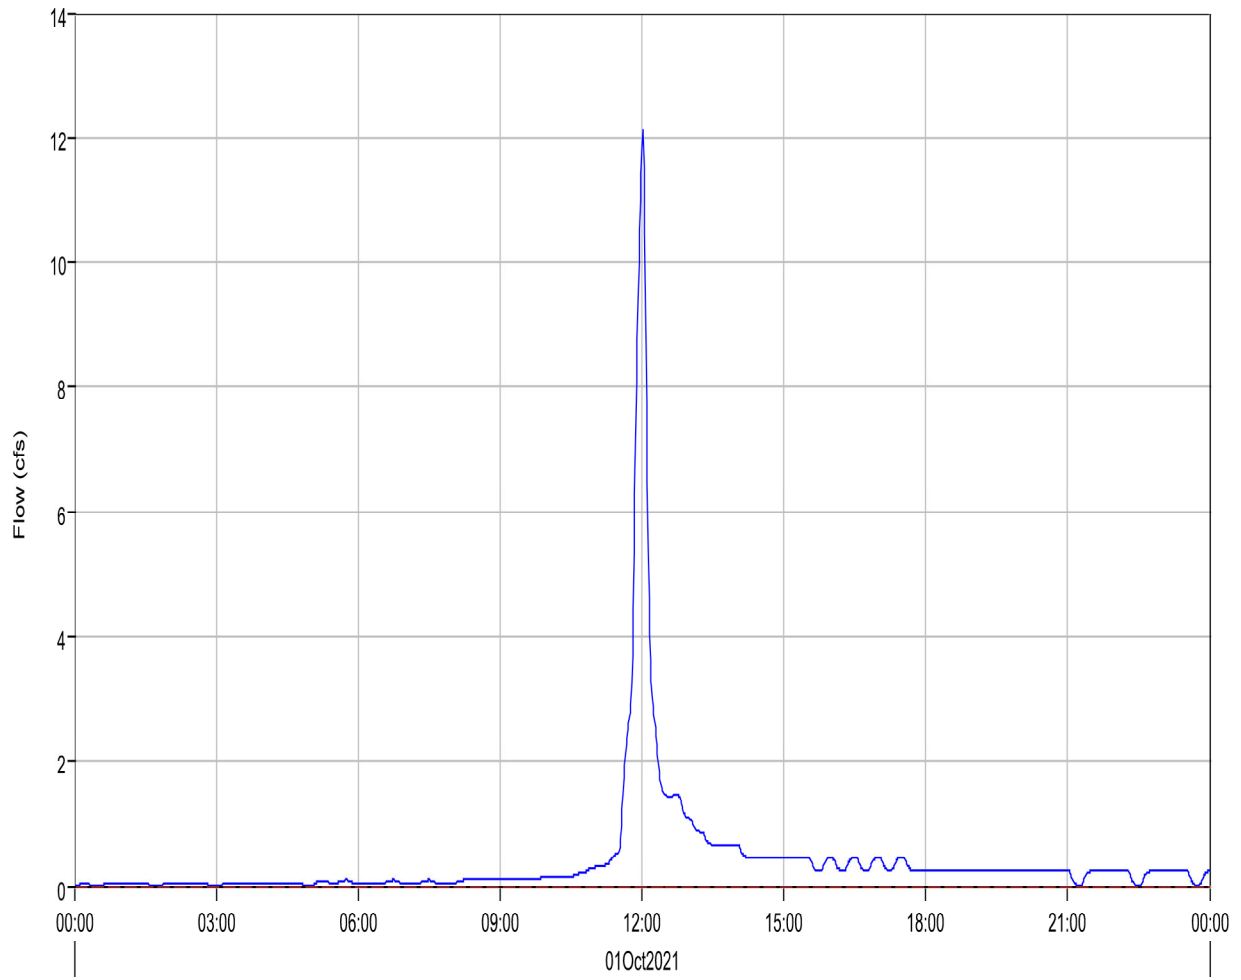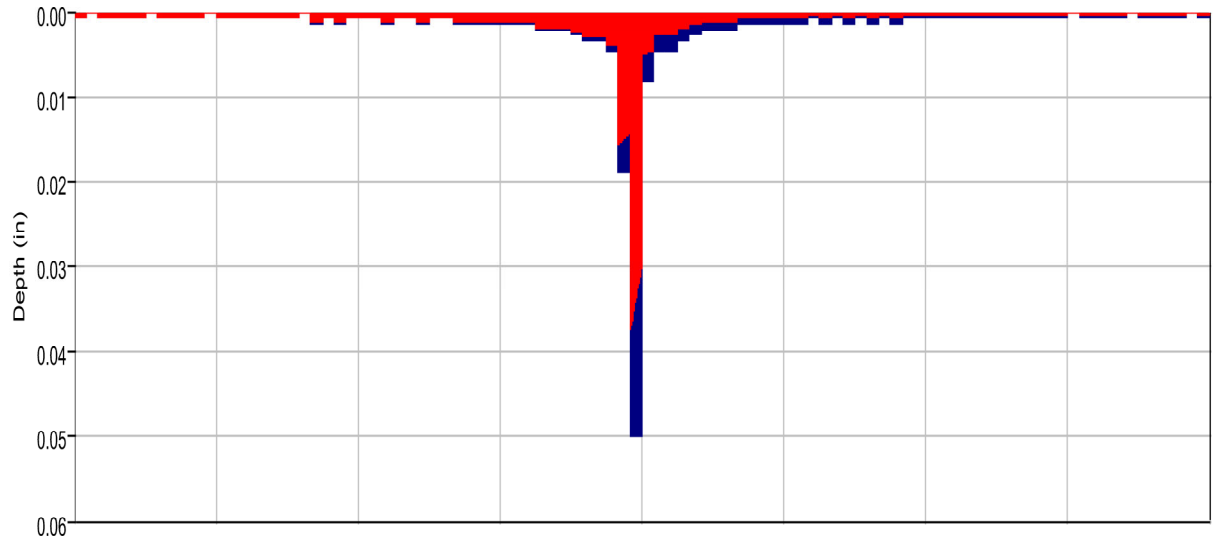

Run:EV 5-yr Pr. Type II Element:PB8 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB8 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB8 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB8 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	12.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:01
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.82 (IN)
Total Loss :	1.88 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.82 (IN)	Discharge :	0.82 (IN)

Subbasin "PB9" Results for Run "EV 5-yr Pr. Type II"

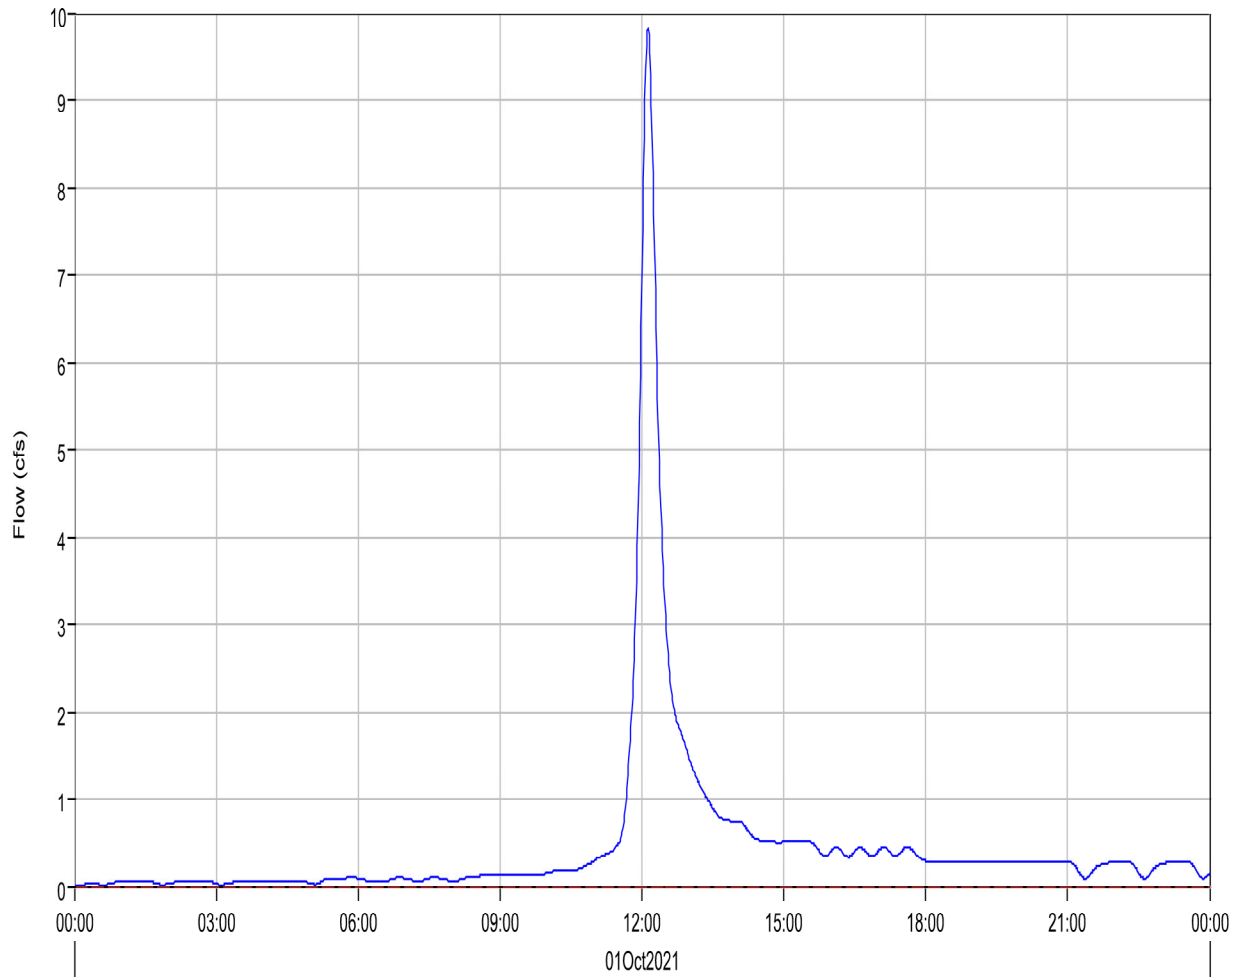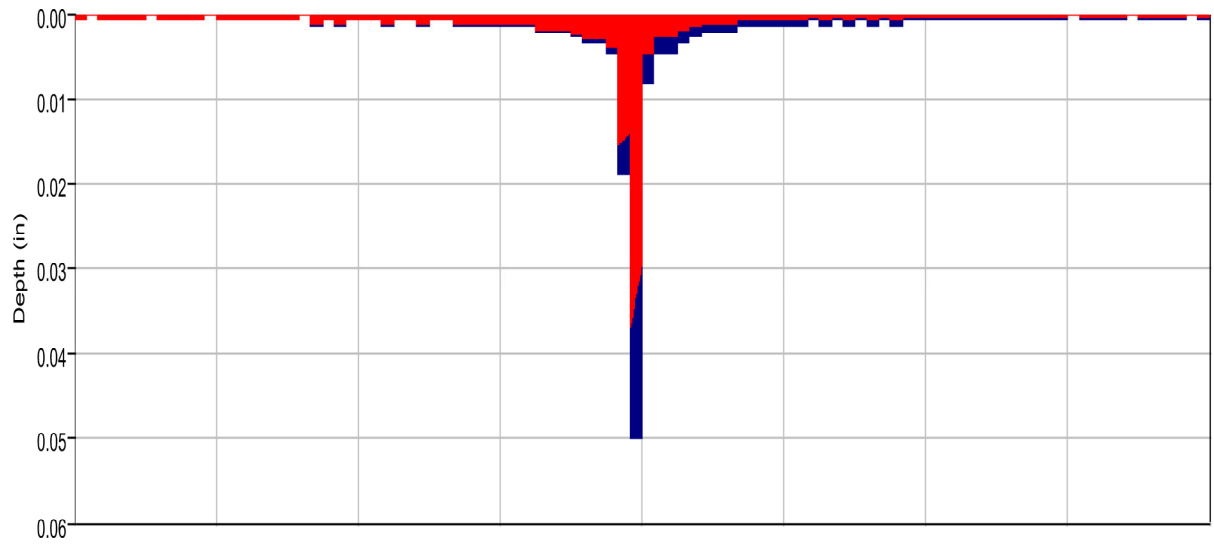

Run:EV 5-yr Pr. Type II Element:PB9 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB9 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB9 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB9 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB9
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	9.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.85 (IN)
Total Loss :	1.85 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.85 (IN)	Discharge :	0.85 (IN)

Subbasin "PB10" Results for Run "EV 5-yr Pr. Type II"

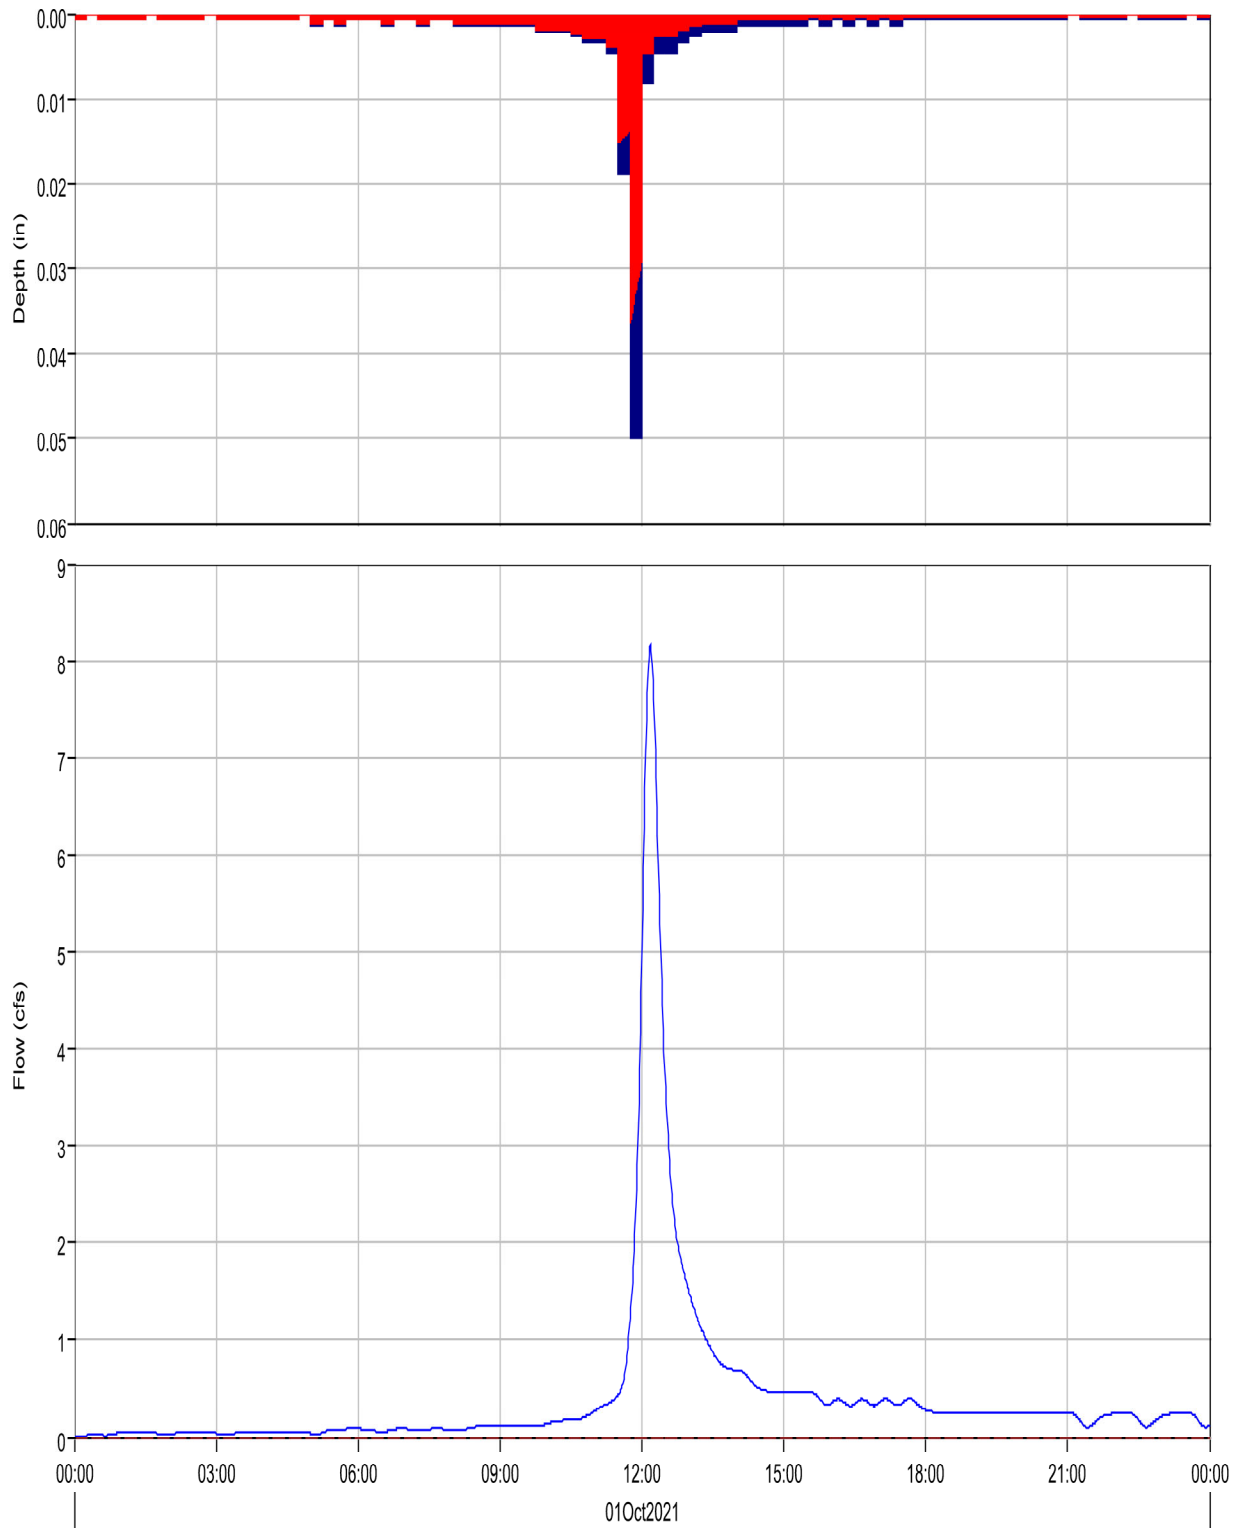

Run:EV 5-yr Pr. Type II Element:PB10 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB10 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB10 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB10 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB10


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	8.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:11
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.87 (IN)
Total Loss :	1.82 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.88 (IN)	Discharge :	0.87 (IN)

Subbasin "PB11" Results for Run "EV 5-yr Pr. Type II"

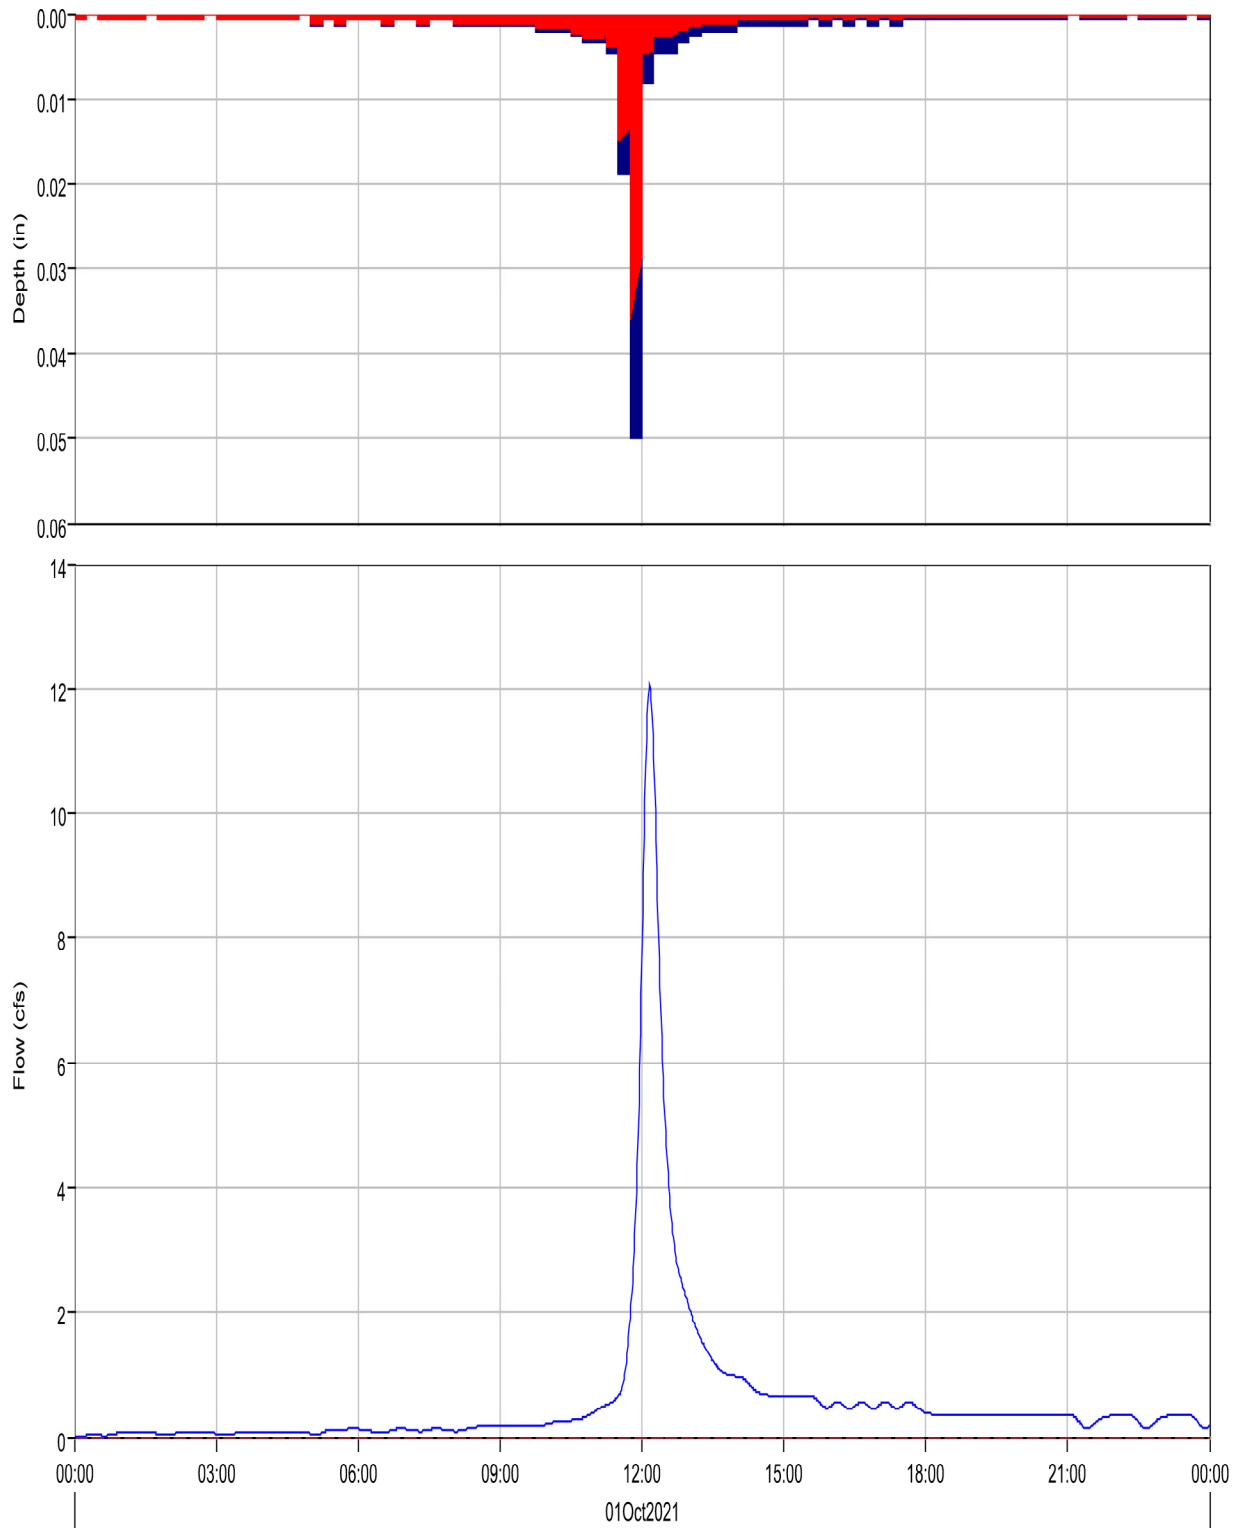

Run:EV 5-yr Pr. Type II Element:PB11 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB11 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB11 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB11 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB11


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	12.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.90 (IN)
Total Loss :	1.79 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.91 (IN)	Discharge :	0.90 (IN)

Subbasin "PB12" Results for Run "EV 5-yr Pr. Type II"

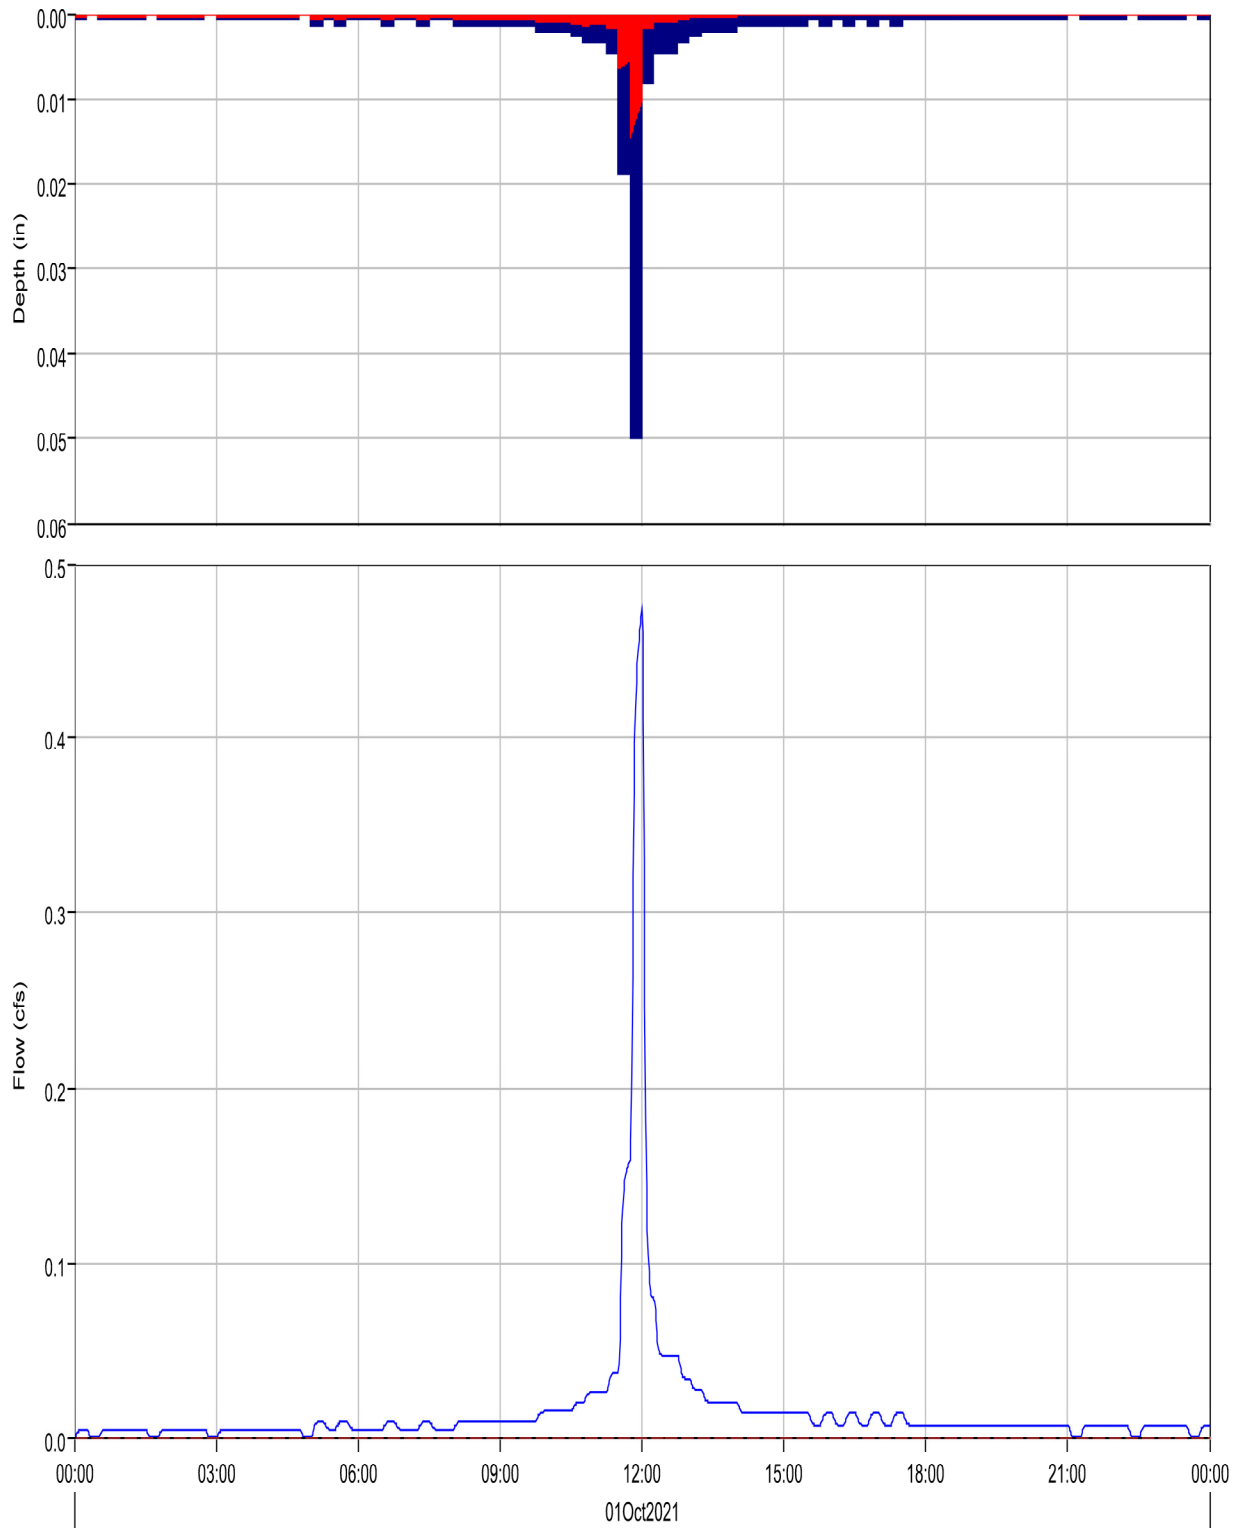

Run:EV 5-yr Pr. Type II Element:PB12 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB12 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB12 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB12 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB12



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	0.5 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	1.95 (IN)
Total Loss :	0.74 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	1.96 (IN)	Discharge :	1.95 (IN)

Subbasin "PB13" Results for Run "EV 5-yr Pr. Type II"

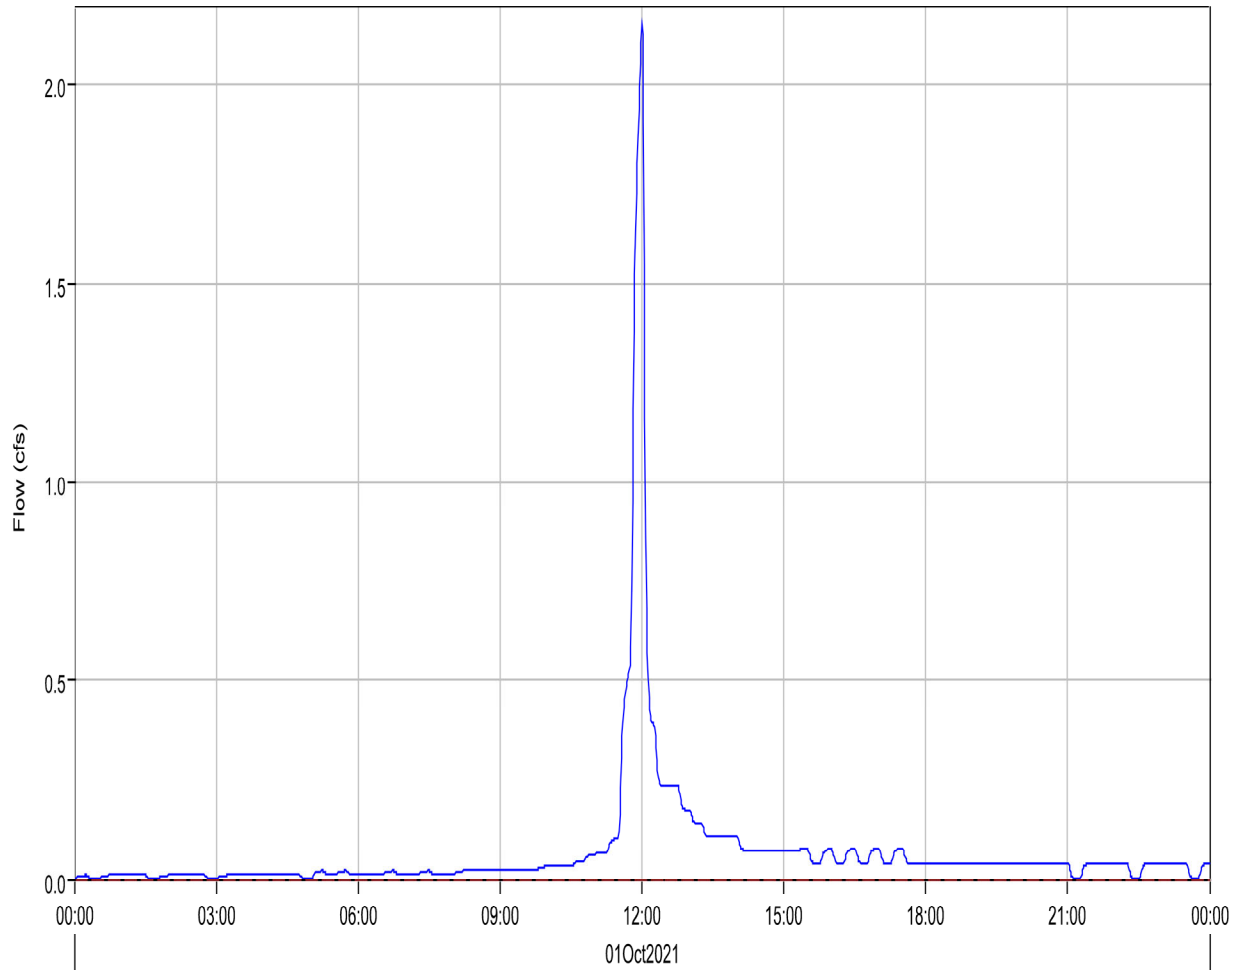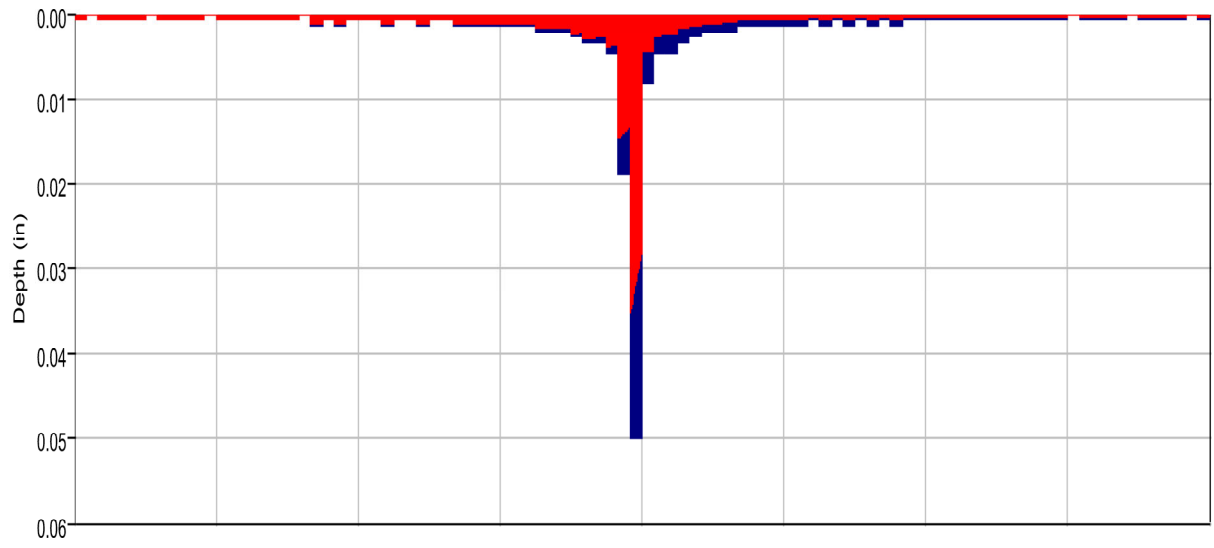

- Run:EV 5-yr Pr. Type II Element:PB13 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:PB13 Result:Outflow
- Run:EV 5-YR PR. TYPE II Element:PB13 Result:Precipitation Loss
- Run:EV 5-YR PR. TYPE II Element:PB13 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB13


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Discharge :	2.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	2.70 (IN)	Total Direct Runoff :	0.93 (IN)
Total Loss :	1.77 (IN)	Total Baseflow :	0.00 (IN)
Total Excess :	0.93 (IN)	Discharge :	0.93 (IN)

Subbasin "PB14" Results for Run "EV 5-yr Pr. Type II"

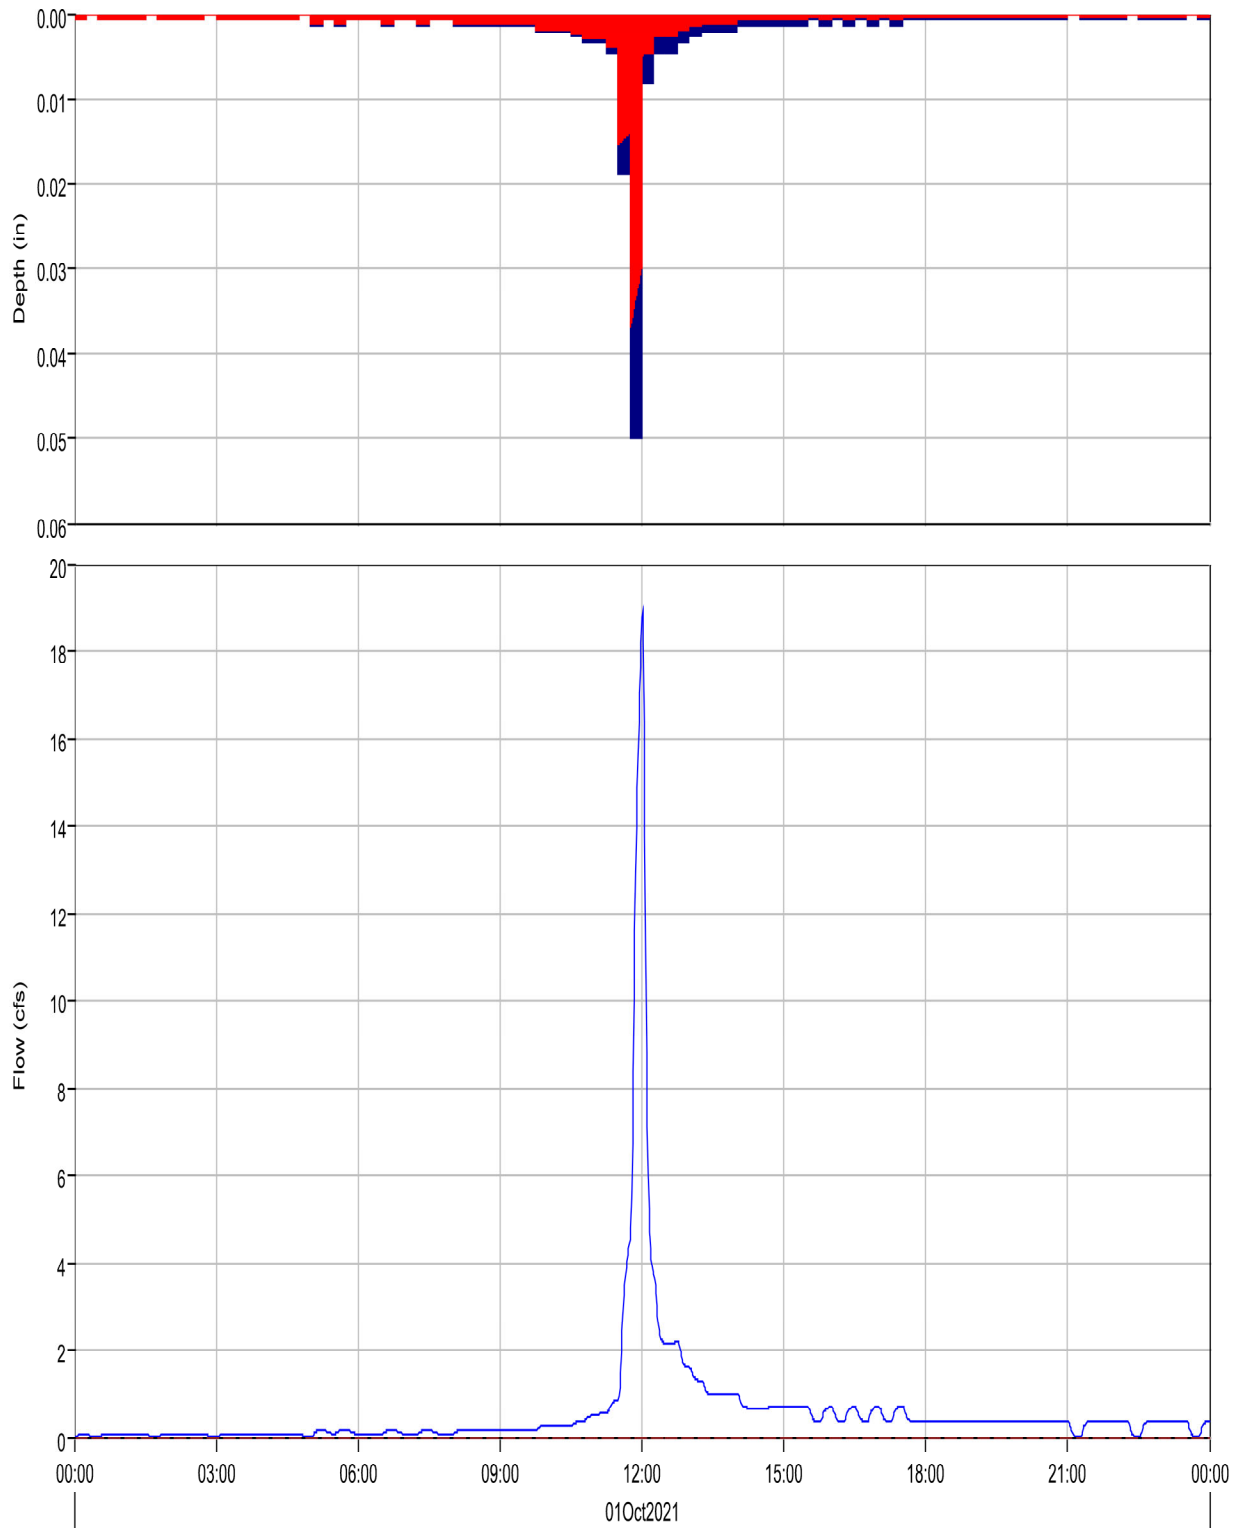

Run:EV 5-yr Pr. Type II Element:PB14 Result:Precipitation
Run:EV 5-yr Pr. Type II Element:PB14 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:PB14 Result:Precipitation Loss
Run:EV 5-YR PR. TYPE II Element:PB14 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB14


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	18.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:01
Total Precipitation :	3.9 (AC-FT)	Total Direct Runoff :	1.2 (AC-FT)
Total Loss :	2.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.2 (AC-FT)	Discharge :	1.2 (AC-FT)

Subbasin "PB15" Results for Run "EV 5-yr Pr. Type II"

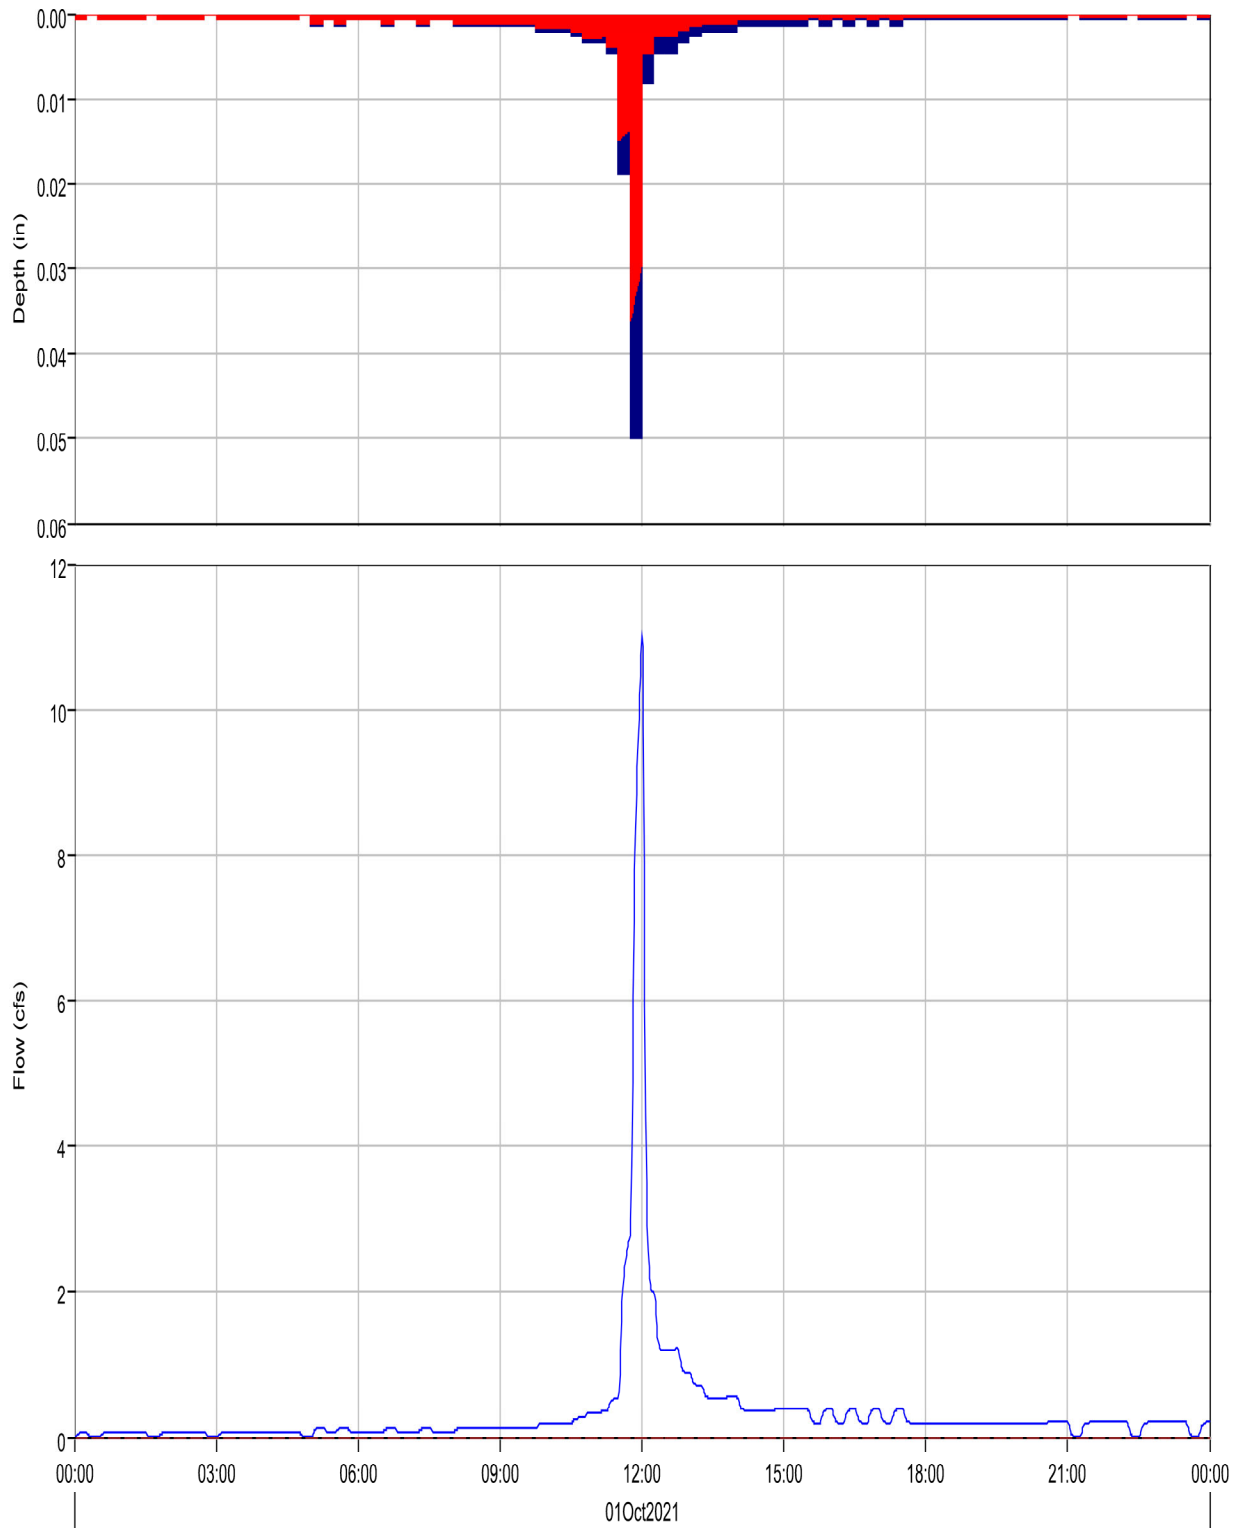

- Run:EV 5-yr Pr. Type II Element:PB15 Result:Precipitation
- Run:EV 5-yr Pr. Type II Element:PB15 Result:Outflow
- Run:EV 5-YR PR. TYPE II Element:PB15 Result:Precipitation Loss
- Run:EV 5-YR PR. TYPE II Element:PB15 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Subbasin: PB15


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	11.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	2.2 (AC-FT)	Total Direct Runoff :	0.7 (AC-FT)
Total Loss :	1.5 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.7 (AC-FT)	Discharge :	0.7 (AC-FT)

Reach "R-OB1" Results for Run "EV 5-yr Pr. Type II"

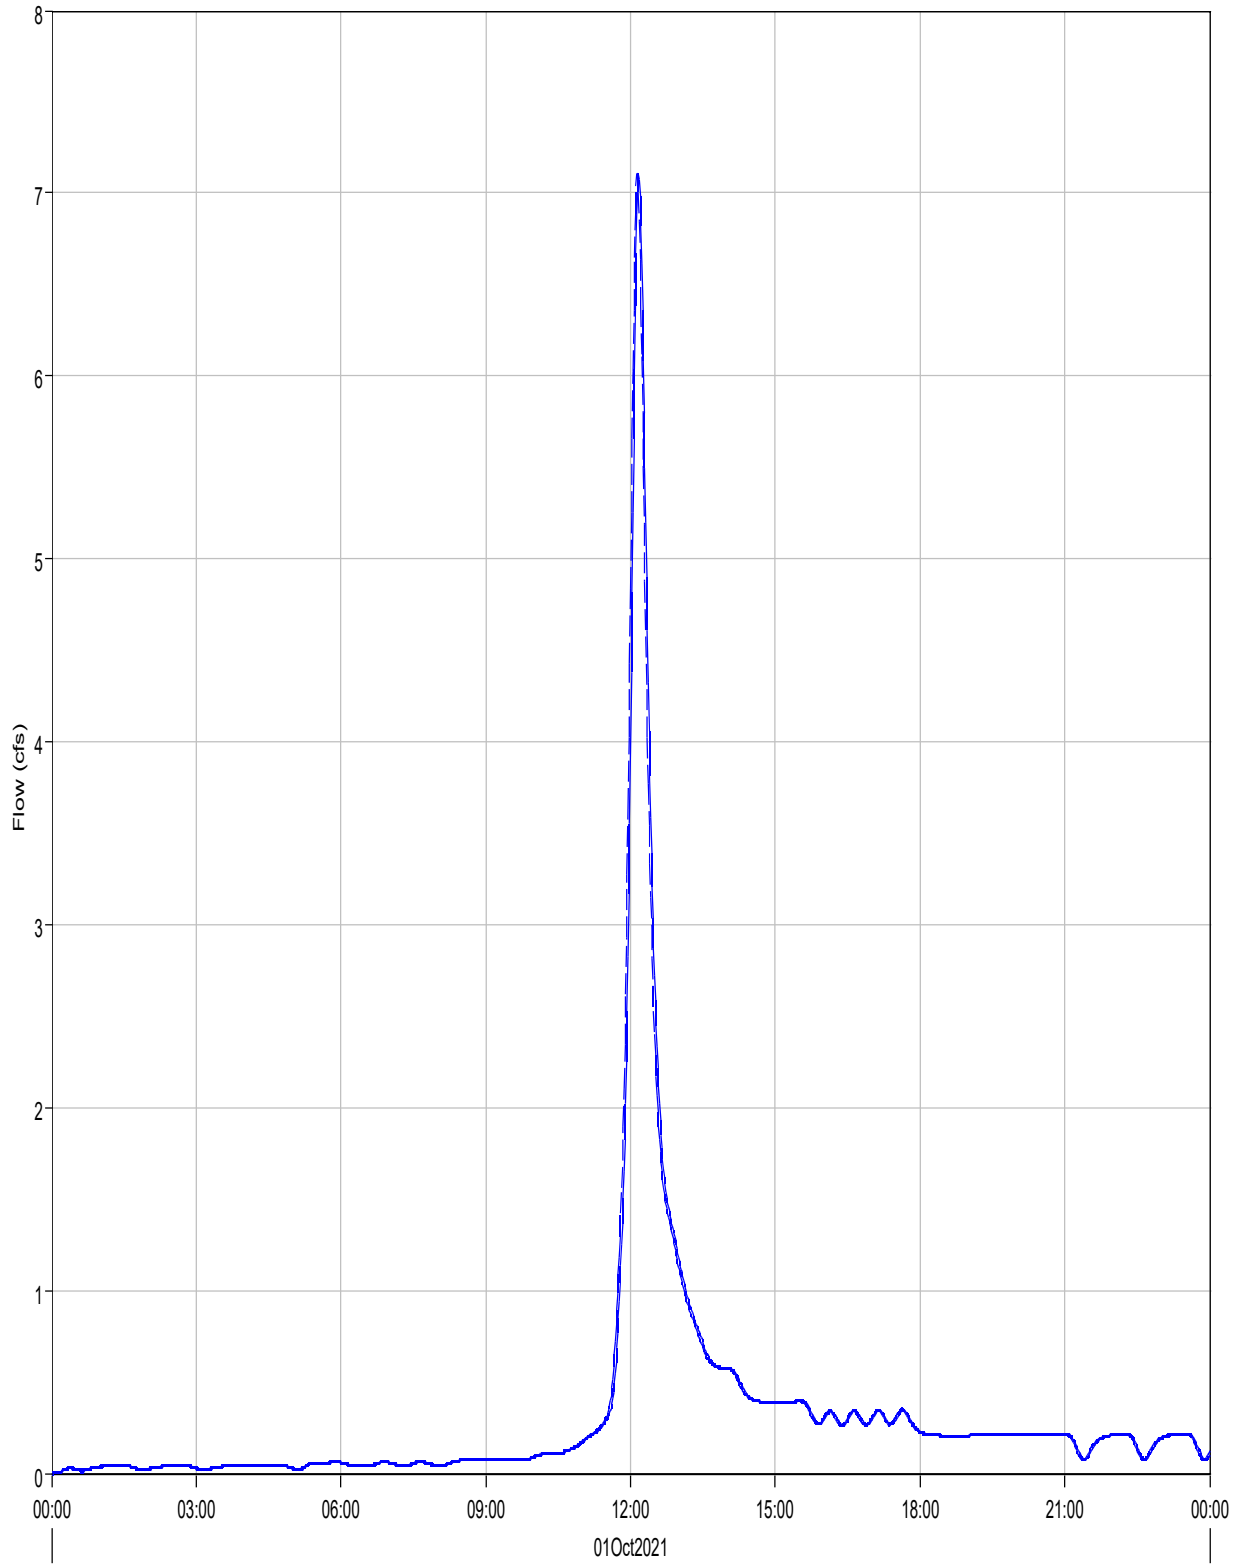

— Run:EV 5-yr Pr. Type II Element:R-OB1 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-OB1 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-OB1


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	7.1 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	7.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:10
Total Inflow :	0.7 (AC-FT)	Total Outflow :	0.7 (AC-FT)

Reach "R-OB2" Results for Run "EV 5-yr Pr. Type II"

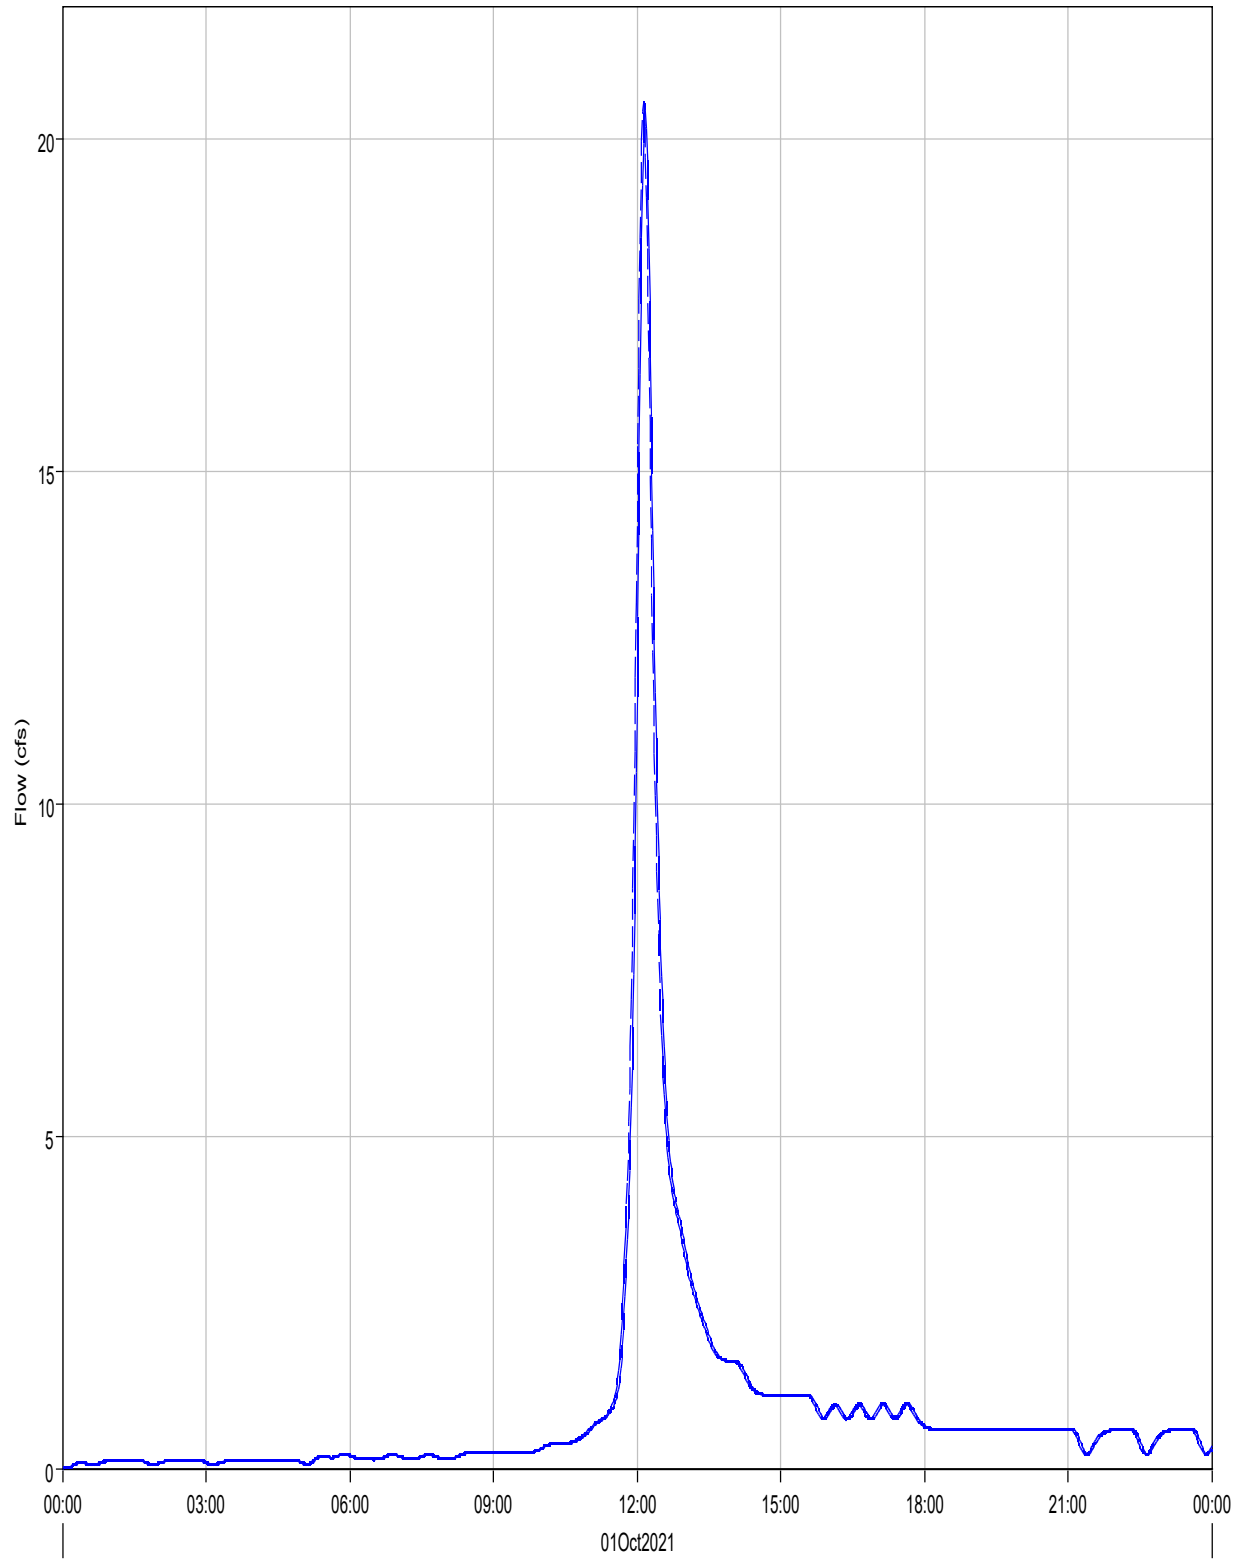

— Run:EV 5-yr Pr. Type II Element:R-OB2 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-OB2 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-OB2


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	20.6 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	20.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:10
Total Inflow :	1.9 (AC-FT)	Total Outflow :	1.9 (AC-FT)

Reach "R-OB4-A" Results for Run "EV 5-yr Pr. Type II"

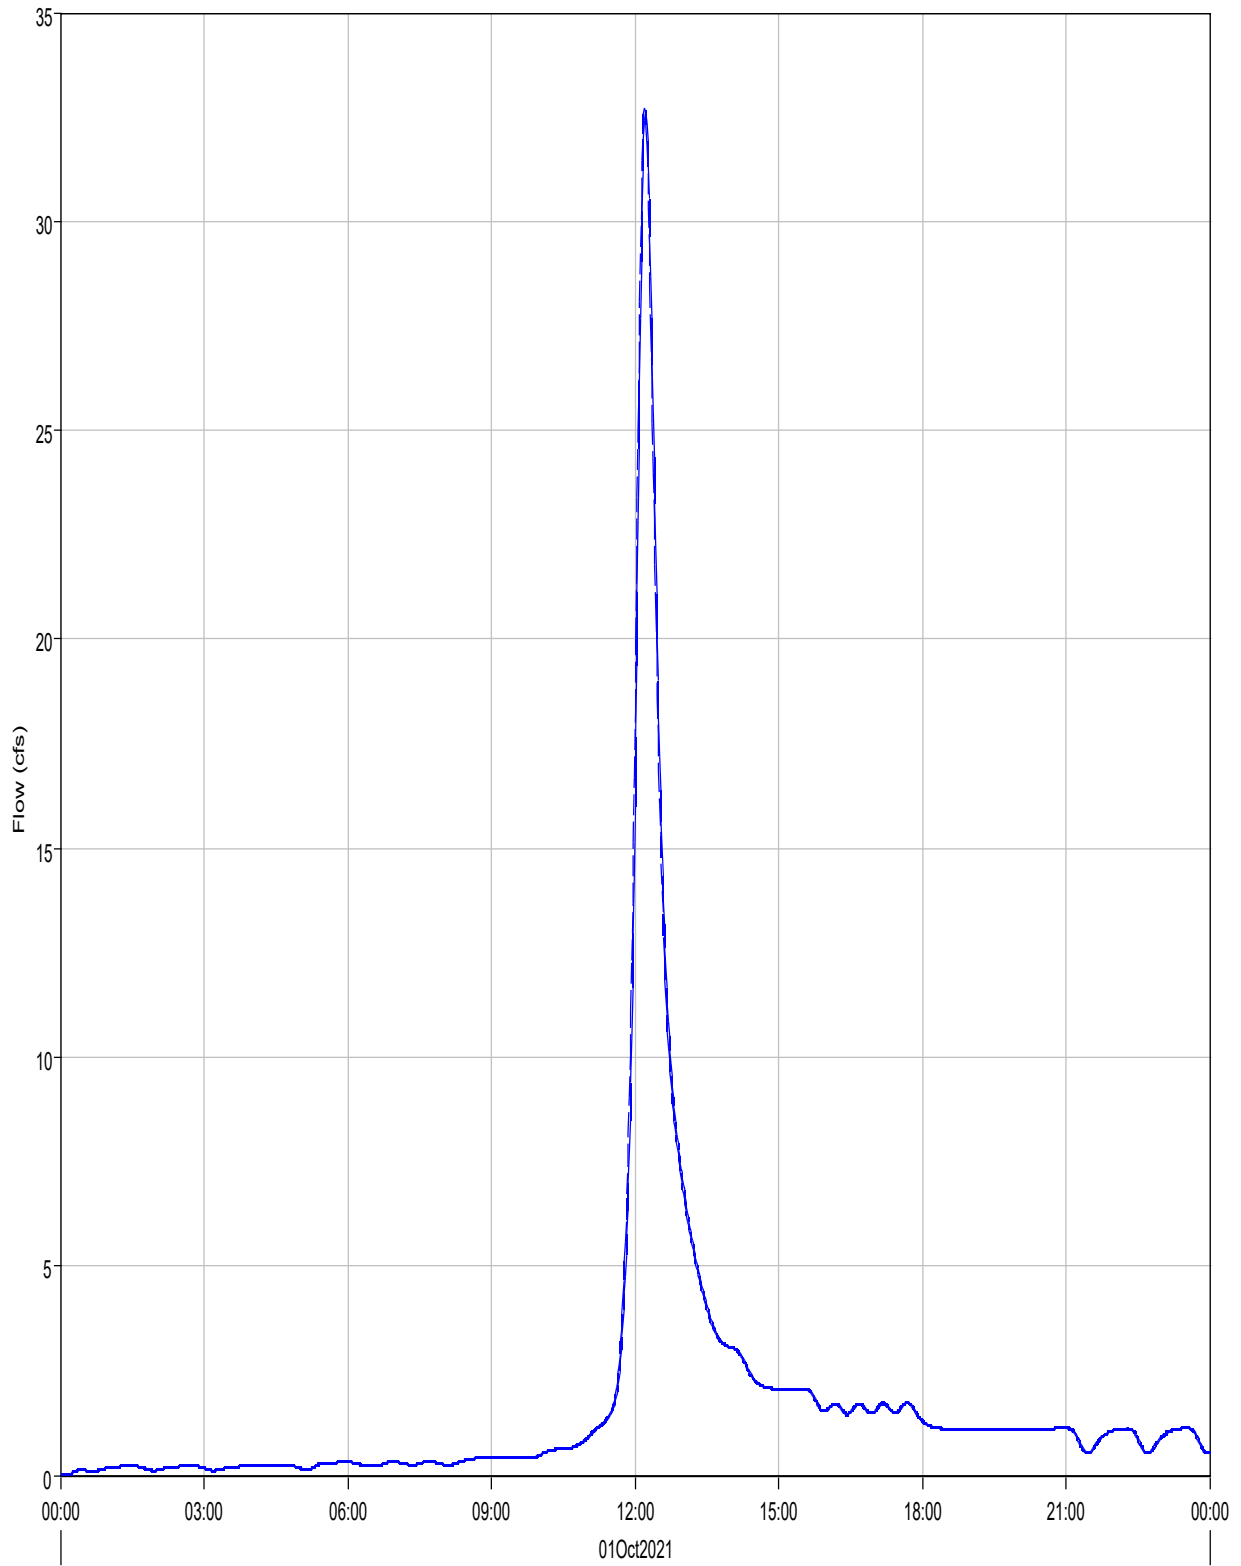

— Run:EV 5-yr Pr. Type II Element:R-OB4-A Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-OB4-A Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-OB4-A


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	32.7 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:12
Peak Outflow :	32.6 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	3.5 (AC-FT)	Total Outflow :	3.5 (AC-FT)

Reach "R-OB4-B" Results for Run "EV 5-yr Pr. Type II"

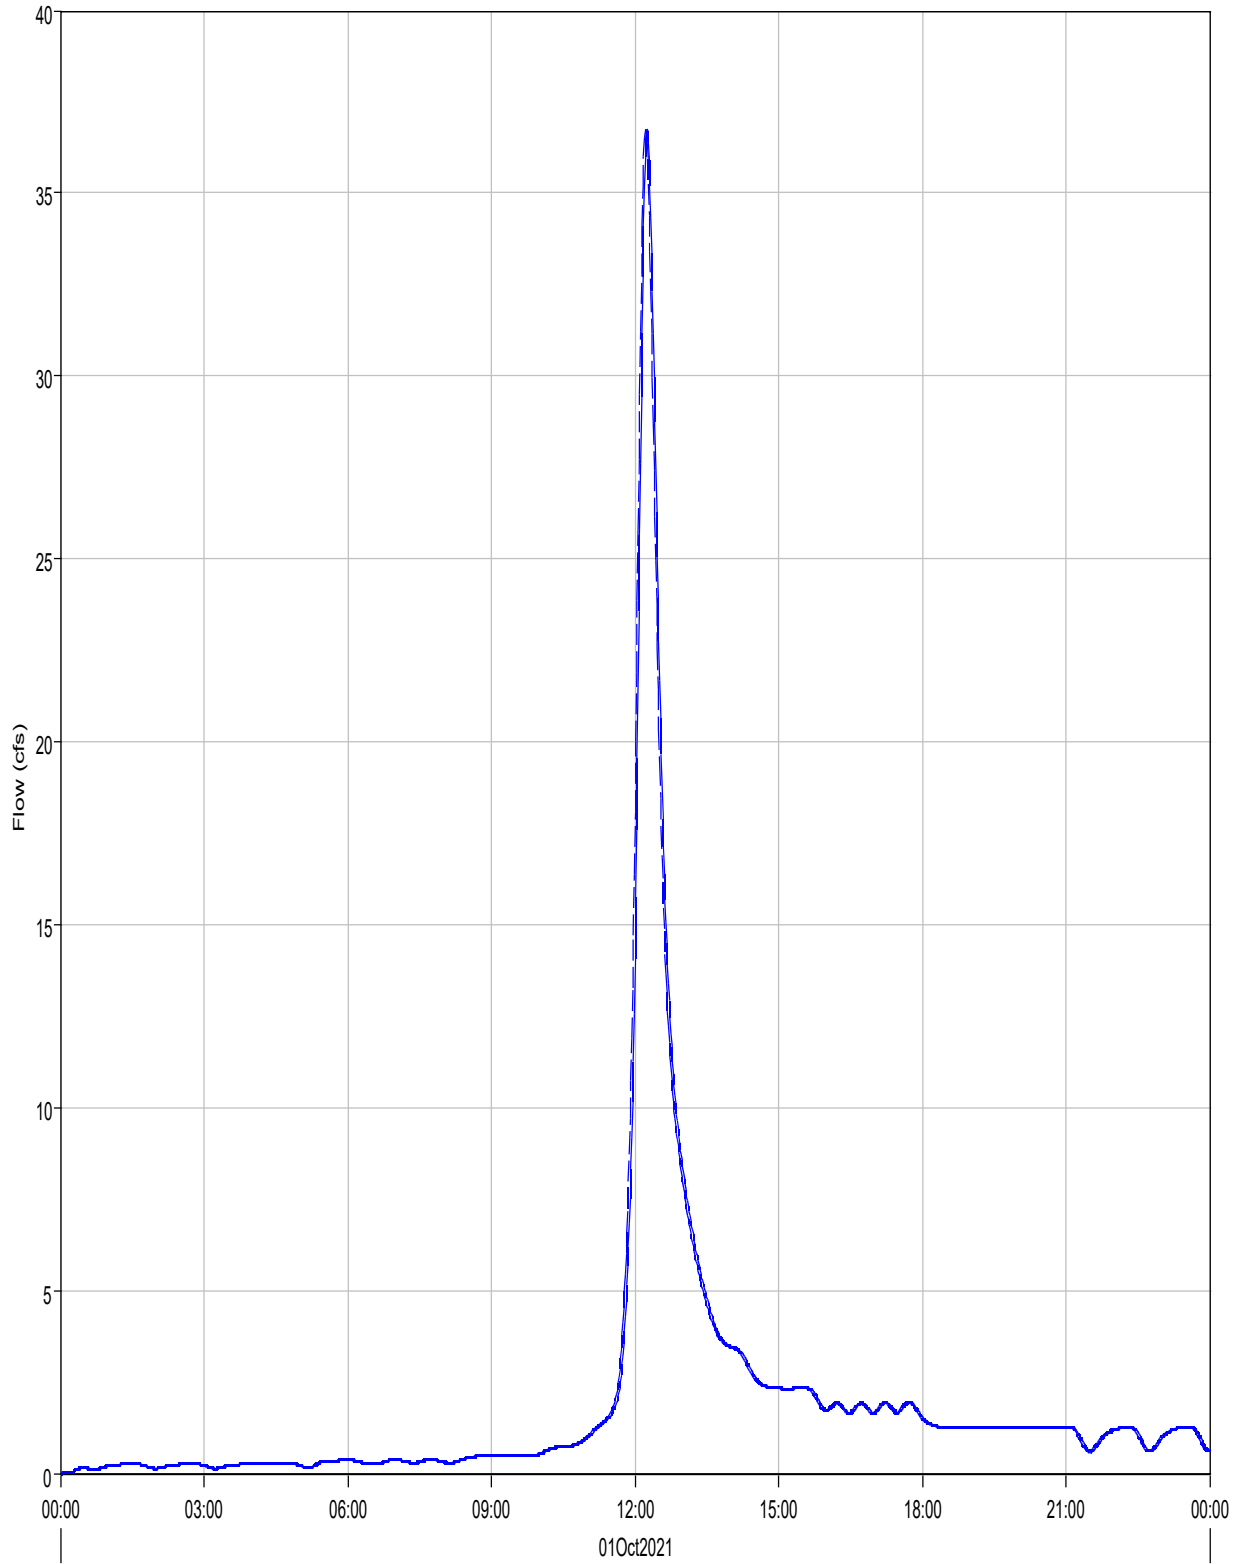

Run:EV 5-yr Pr. Type II Element:R-OB4-B Result:Outflow

Run:EV 5-YR PR. TYPE II Element:R-OB4-B Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-OB4-B


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	36.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	36.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:15
Total Inflow :	0.79 (IN)	Total Outflow :	0.79 (IN)

Reach "R-OB7" Results for Run "EV 5-yr Pr. Type II"

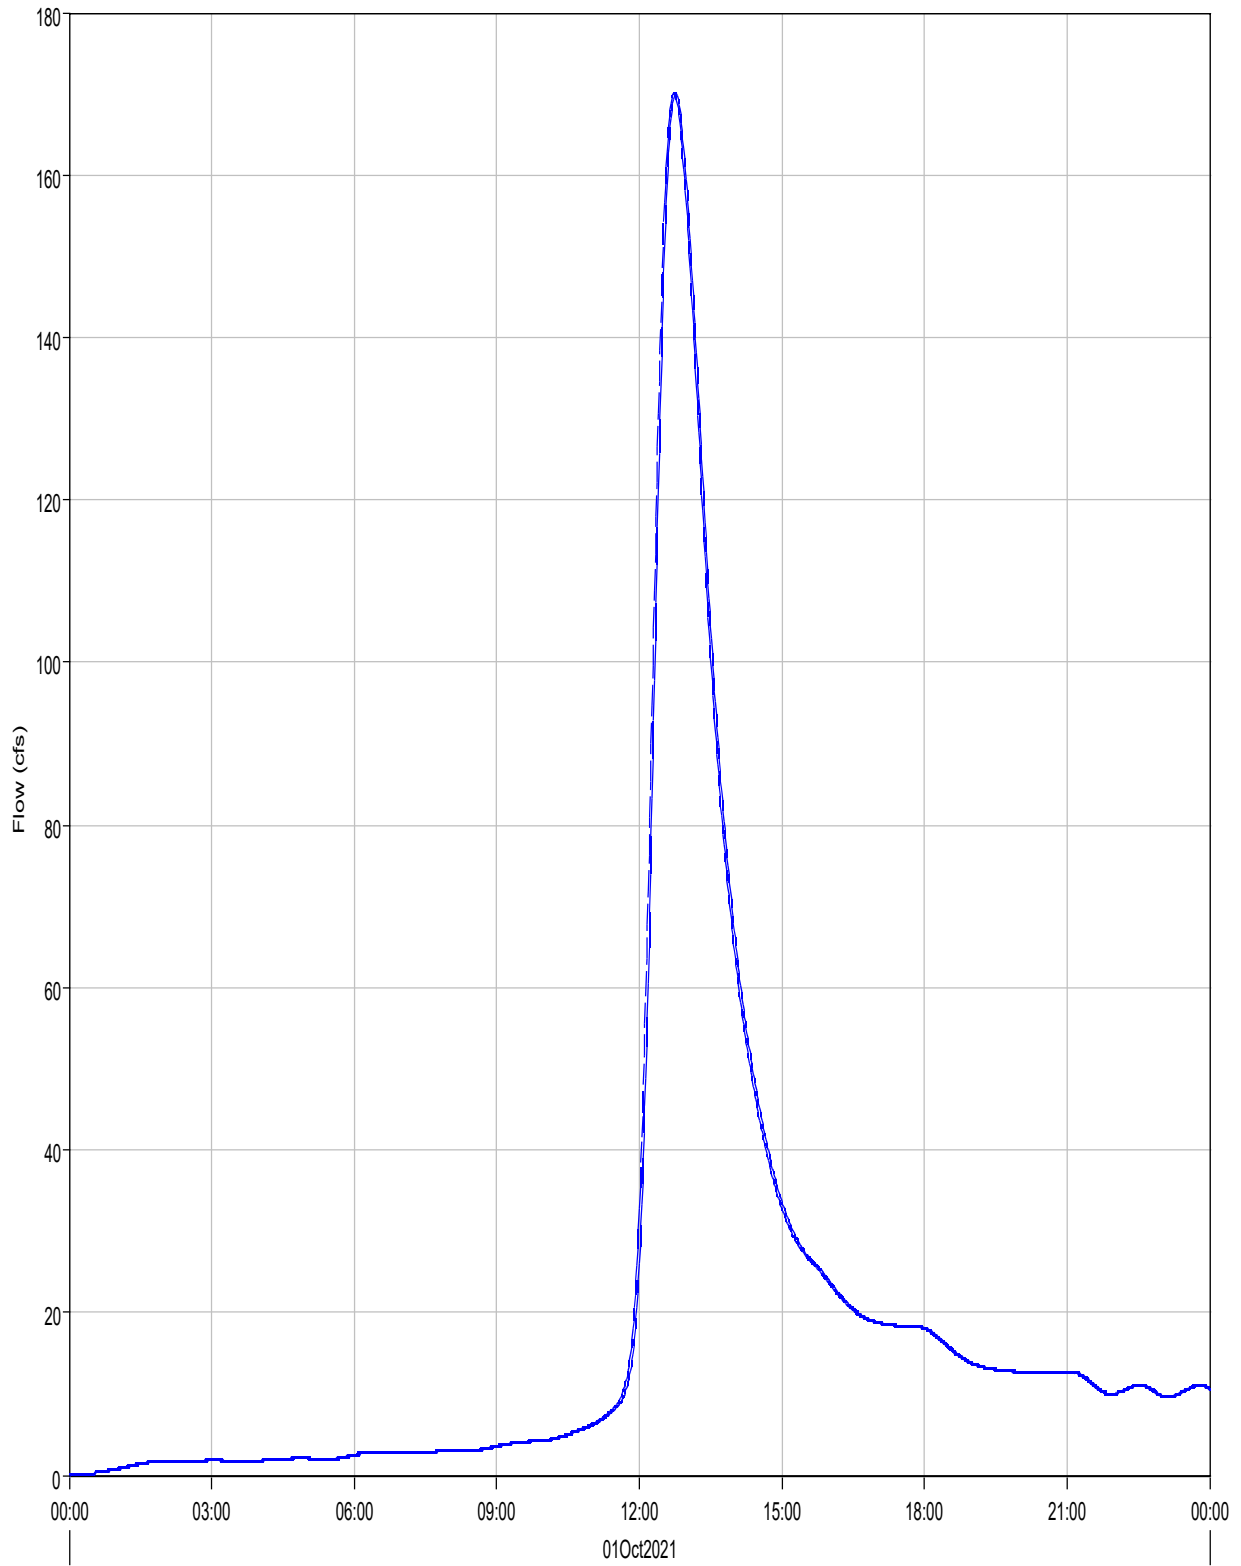

— Run:EV 5-yr Pr. Type II Element:R-OB7 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-OB7 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-OB7


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	170.1 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:44
Peak Outflow :	170.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:46
Total Inflow :	0.66 (IN)	Total Outflow :	0.66 (IN)

Reach "R-OB8" Results for Run "EV 5-yr Pr. Type II"

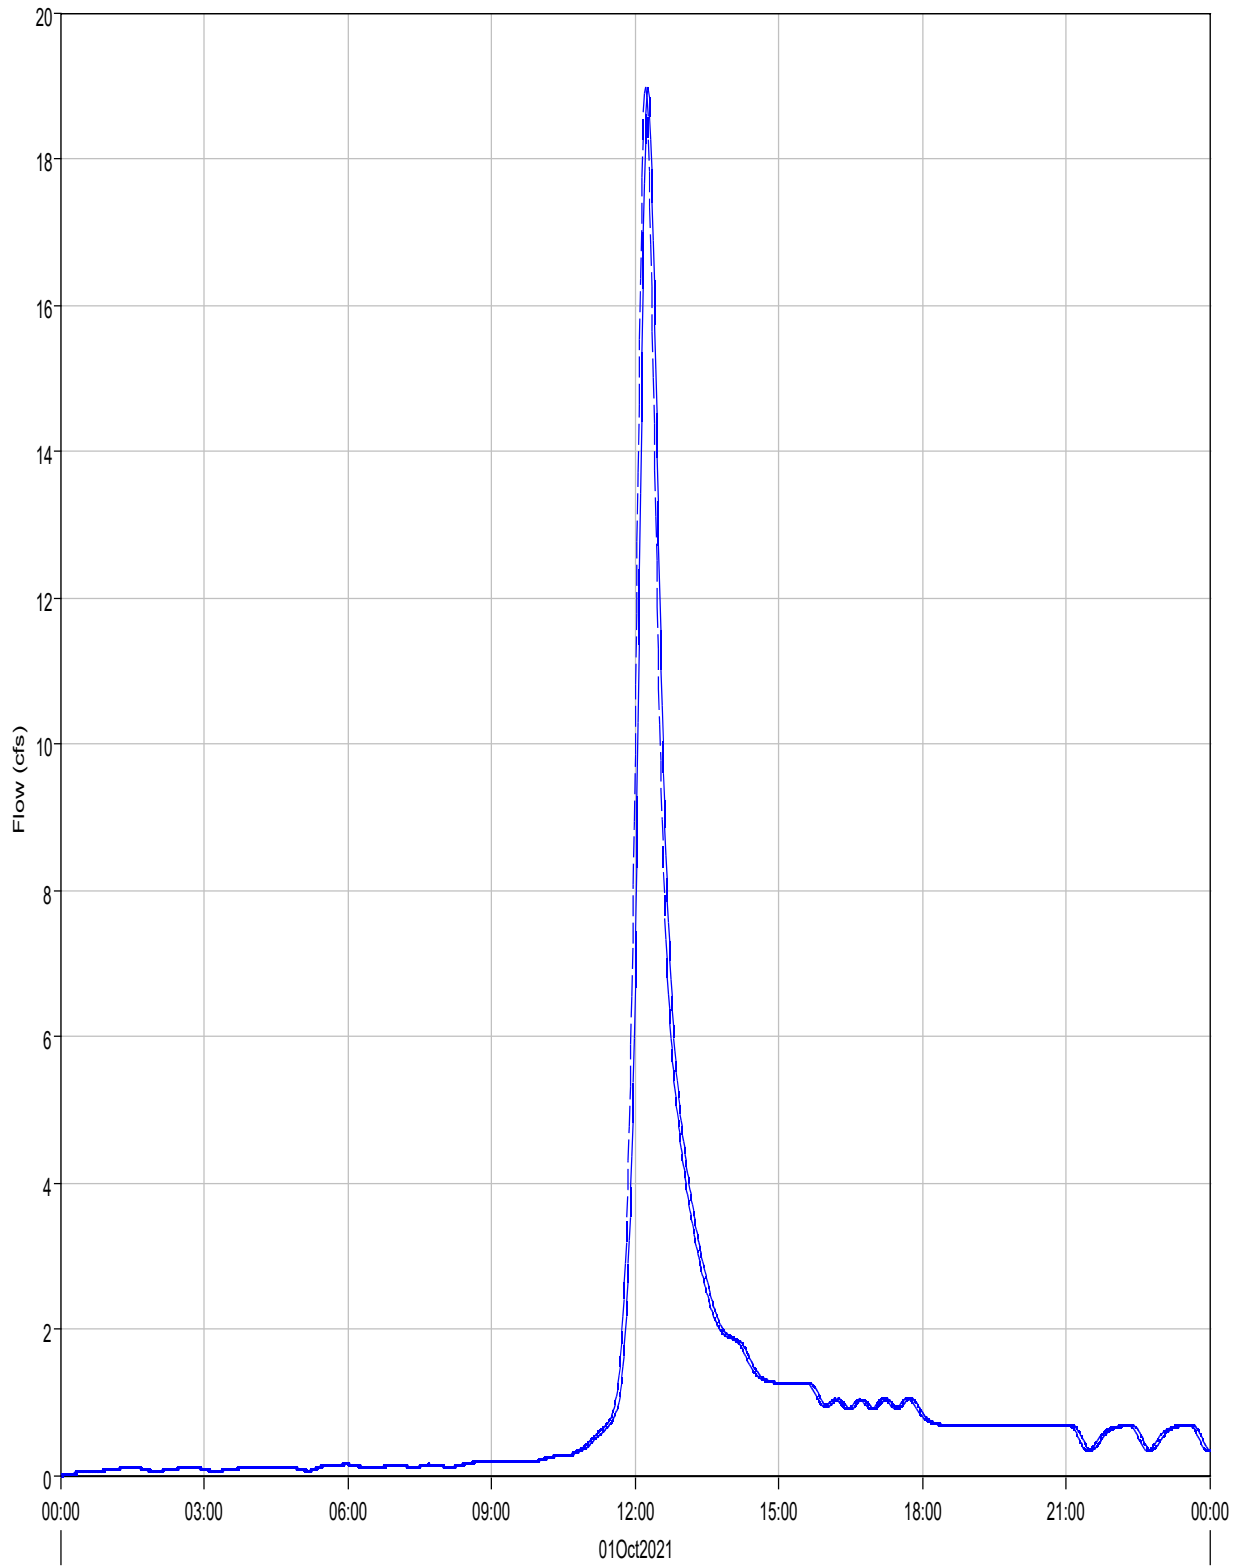

— Run:EV 5-yr Pr. Type II Element:R-OB8 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-OB8 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-OB8


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	19.0 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	19.0 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:16
Total Inflow :	0.76 (IN)	Total Outflow :	0.76 (IN)

Reach "R-PB3" Results for Run "EV 5-yr Pr. Type II"

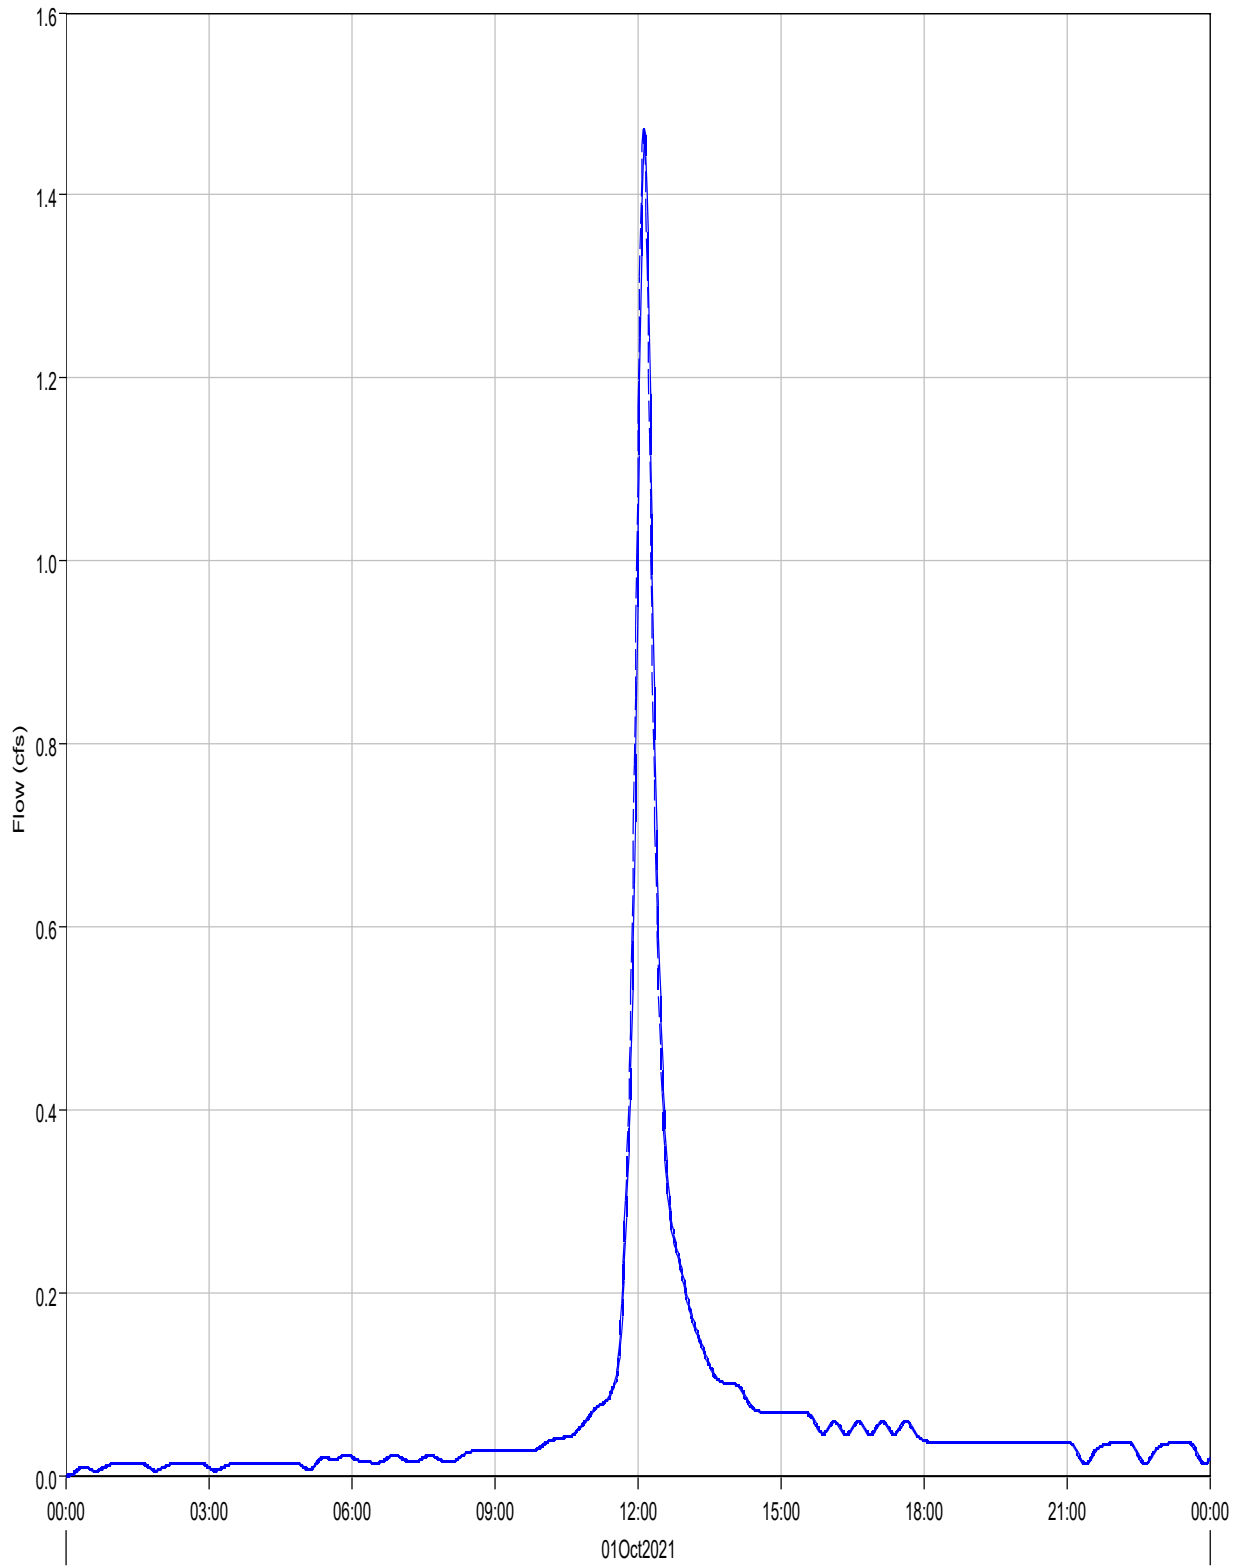

— Run:EV 5-yr Pr. Type II Element:R-PB3 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB3 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	1.5 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	1.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:09
Total Inflow :	0.1 (AC-FT)	Total Outflow :	0.1 (AC-FT)

Reach "R-PB5" Results for Run "EV 5-yr Pr. Type II"

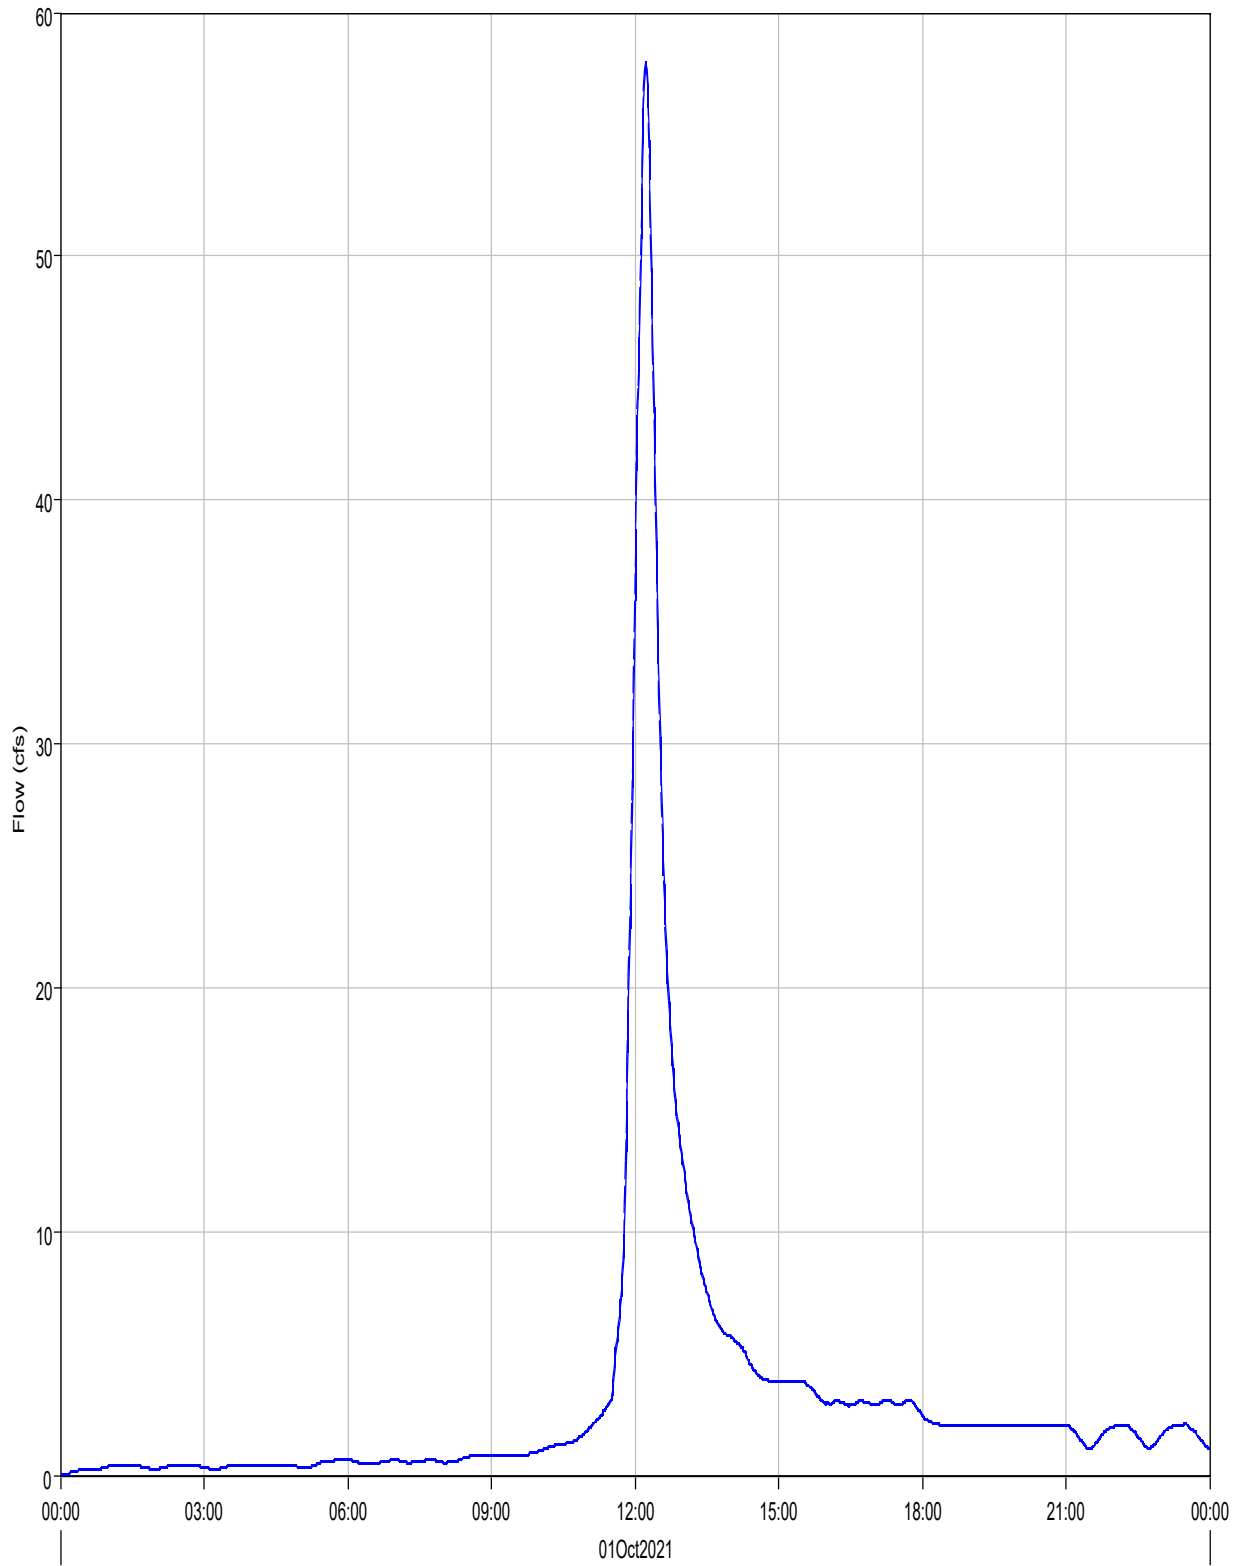

— Run:EV 5-yr Pr. Type II Element:R-PB5 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB5 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB5
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	57.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	57.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:14
Total Inflow :	6.7 (AC-FT)	Total Outflow :	6.7 (AC-FT)

Reach "R-PB7-A" Results for Run "EV 5-yr Pr. Type II"

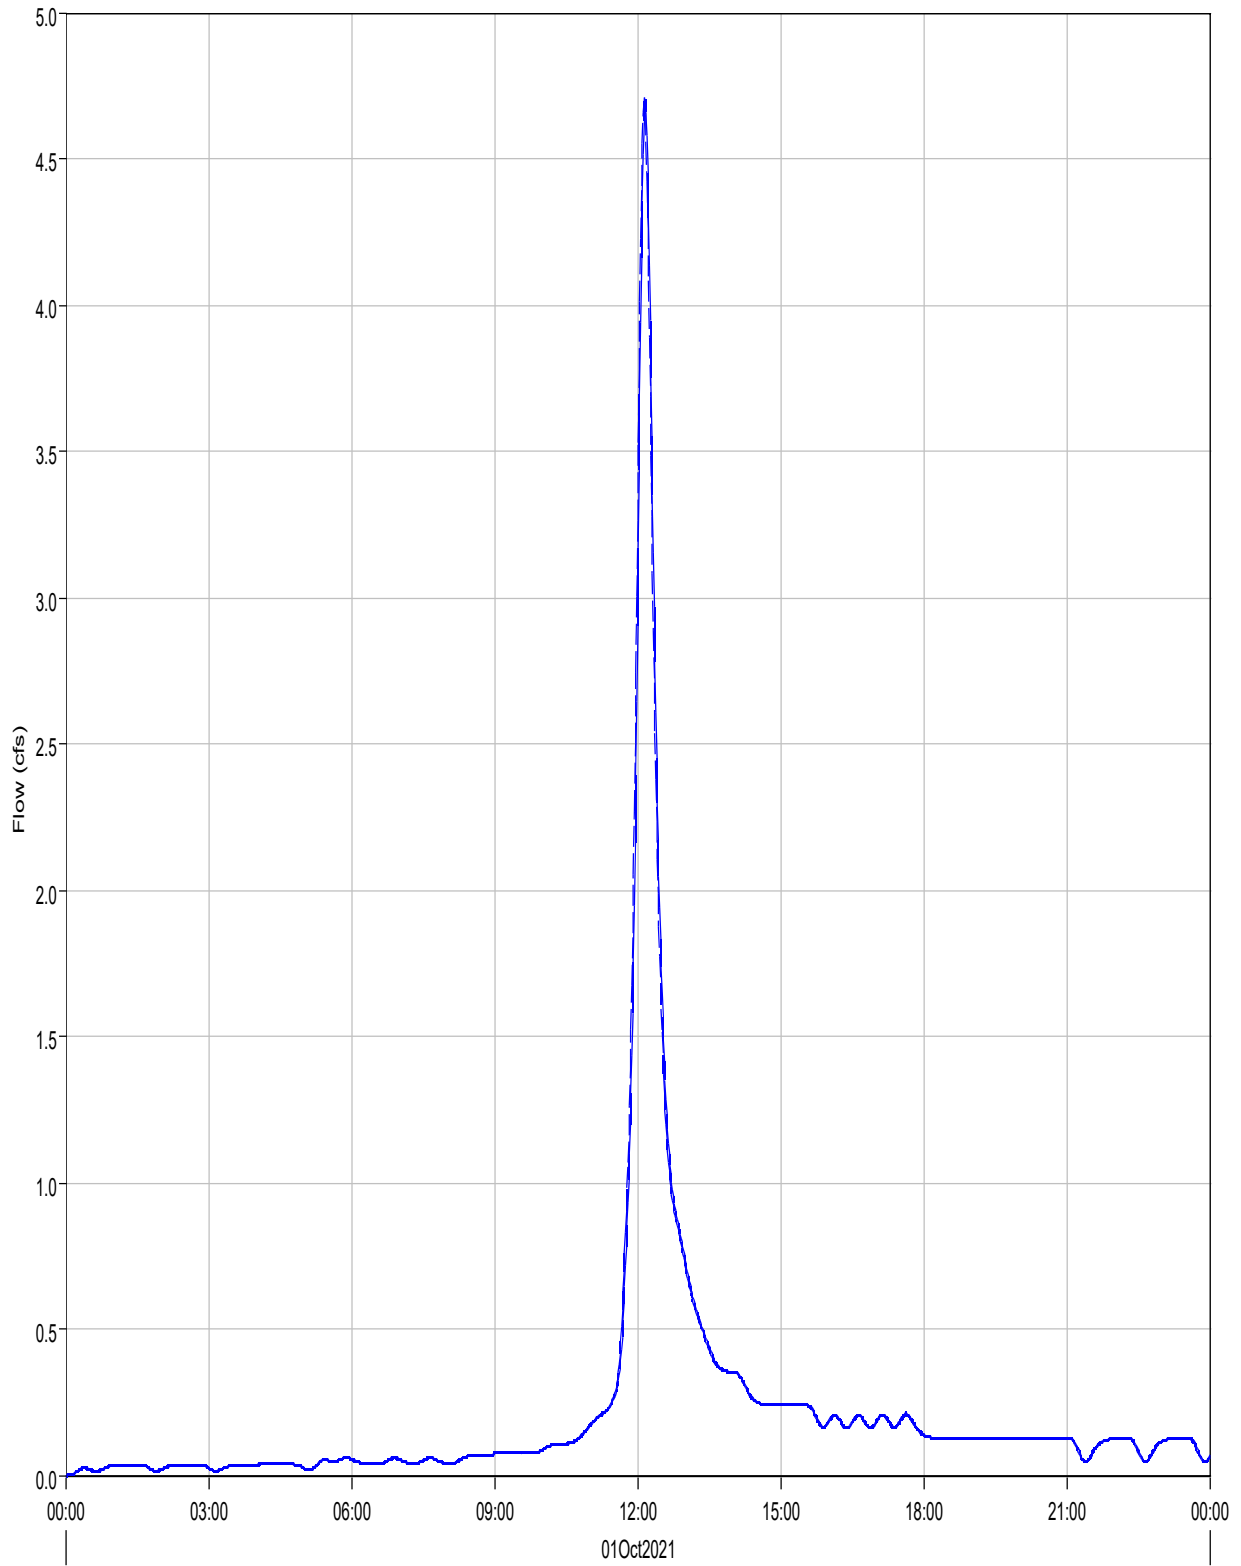

— Run:EV 5-yr Pr. Type II Element:R-PB7-A Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB7-A Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB7-A


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	4.7 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	4.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:10
Total Inflow :	0.4 (AC-FT)	Total Outflow :	0.4 (AC-FT)

Reach "R-PB7-B" Results for Run "EV 5-yr Pr. Type II"

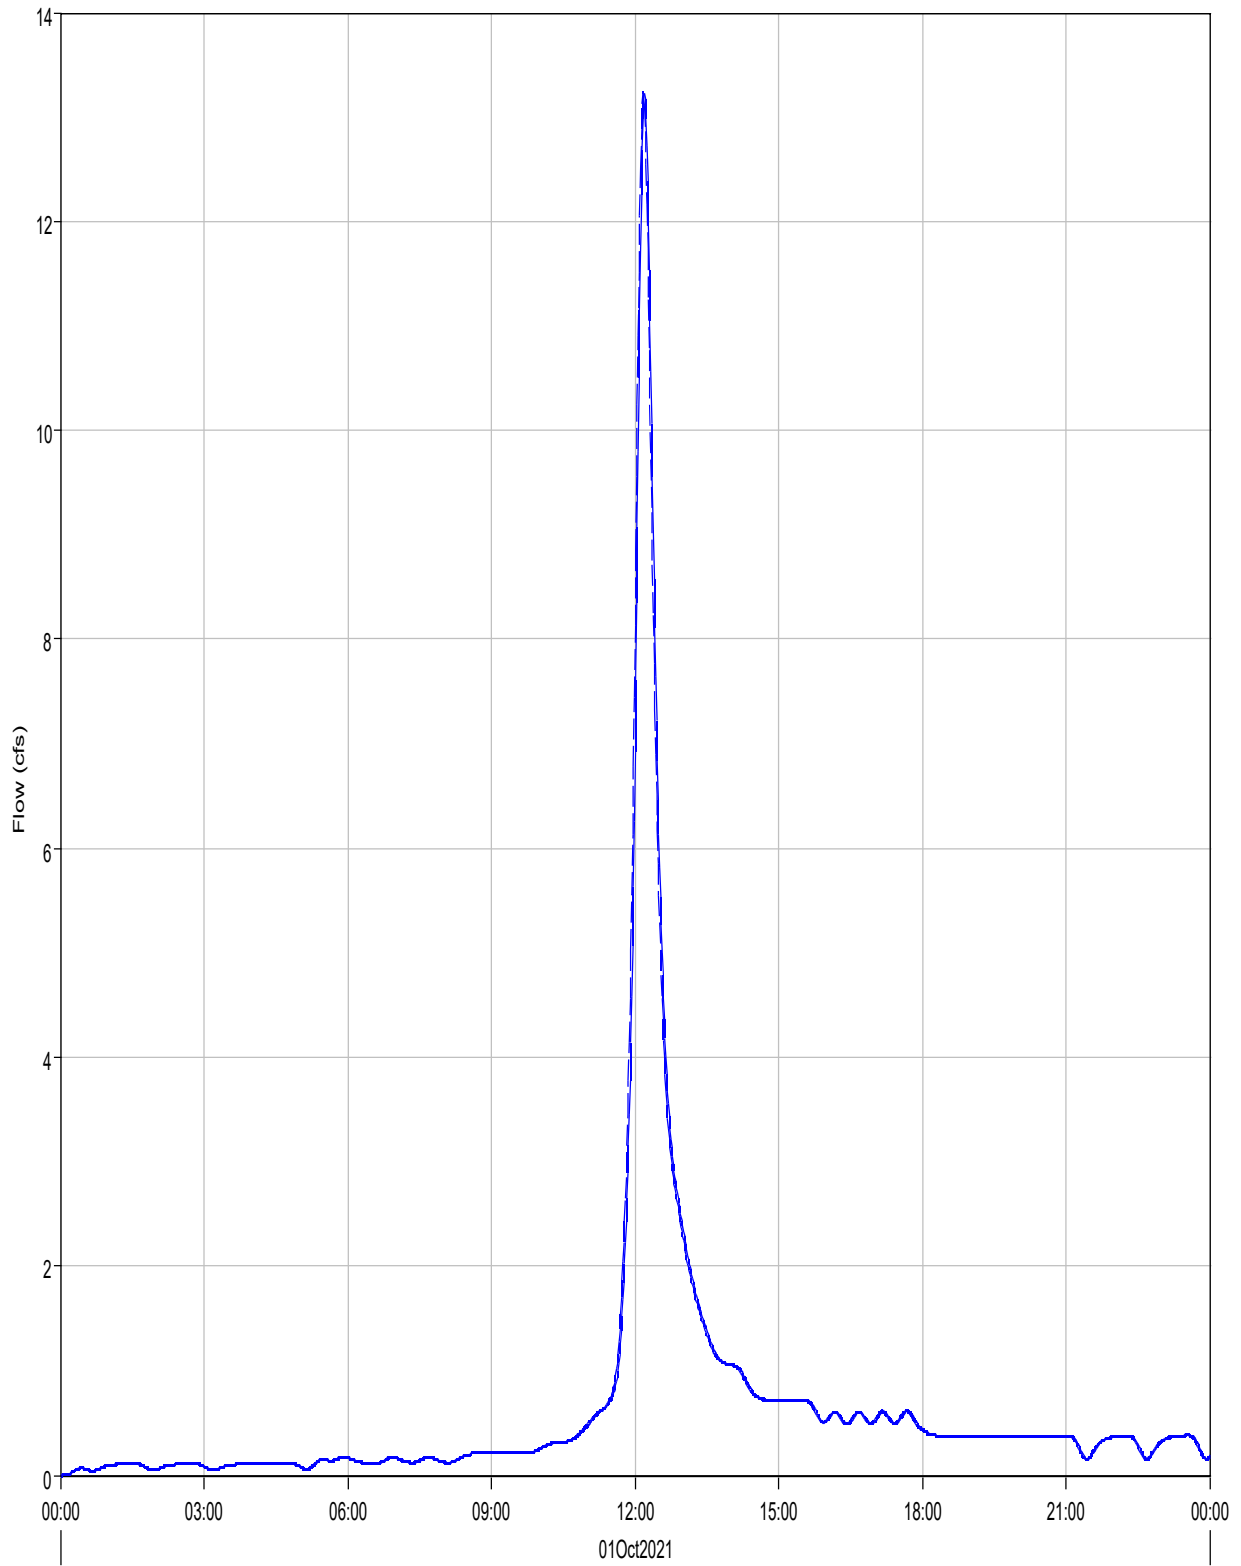

— Run:EV 5-yr Pr. Type II Element:R-PB7-B Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB7-B Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB7-B


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	13.2 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:10
Peak Outflow :	13.2 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:12
Total Inflow :	1.3 (AC-FT)	Total Outflow :	1.3 (AC-FT)

Reach "R-PB7-C" Results for Run "EV 5-yr Pr. Type II"

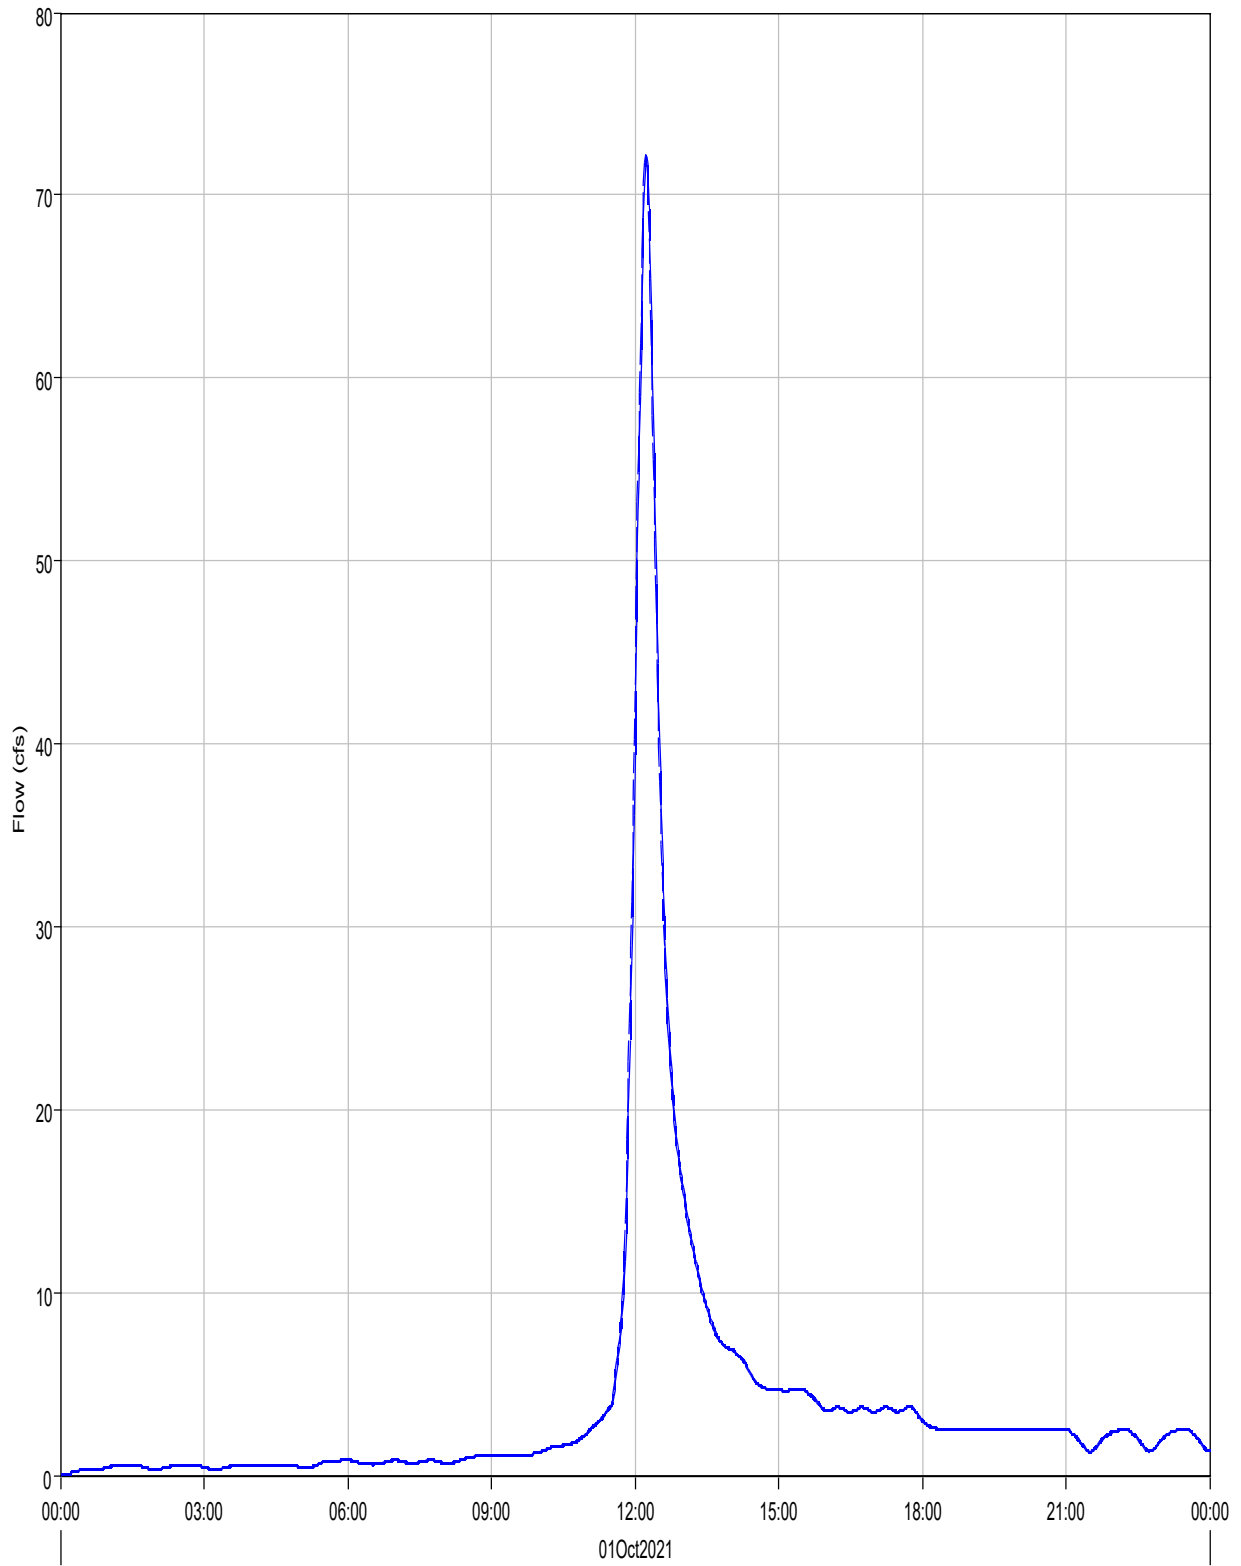

Run:EV 5-yr Pr. Type II Element:R-PB7-C Result:Outflow

Run:EV 5-YR PR. TYPE II Element:R-PB7-C Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB7-C


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	72.2 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	72.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:14
Total Inflow :	8.1 (AC-FT)	Total Outflow :	8.1 (AC-FT)

Reach "R-PB9" Results for Run "EV 5-yr Pr. Type II"

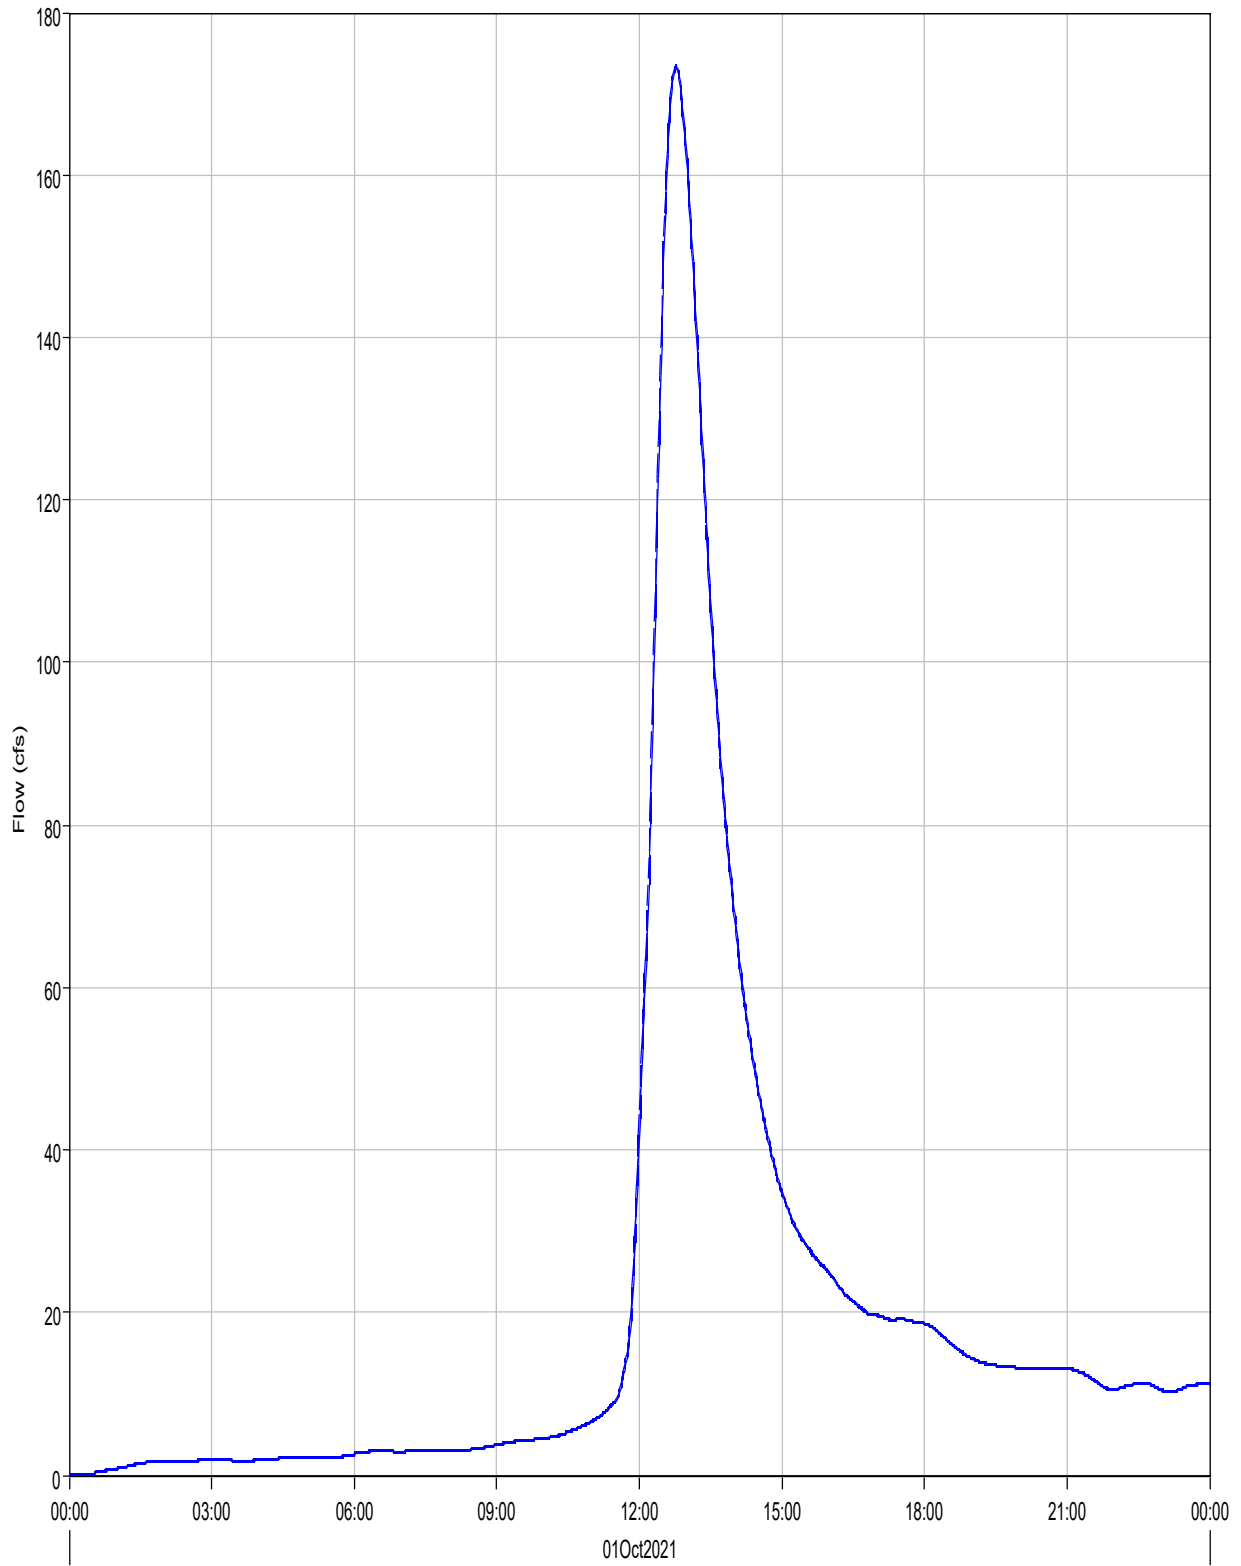

— Run:EV 5-yr Pr. Type II Element:R-PB9 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB9 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB9
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	173.4 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:46
Peak Outflow :	173.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:47
Total Inflow :	0.67 (IN)	Total Outflow :	0.67 (IN)

Reach "R-PB10" Results for Run "EV 5-yr Pr. Type II"

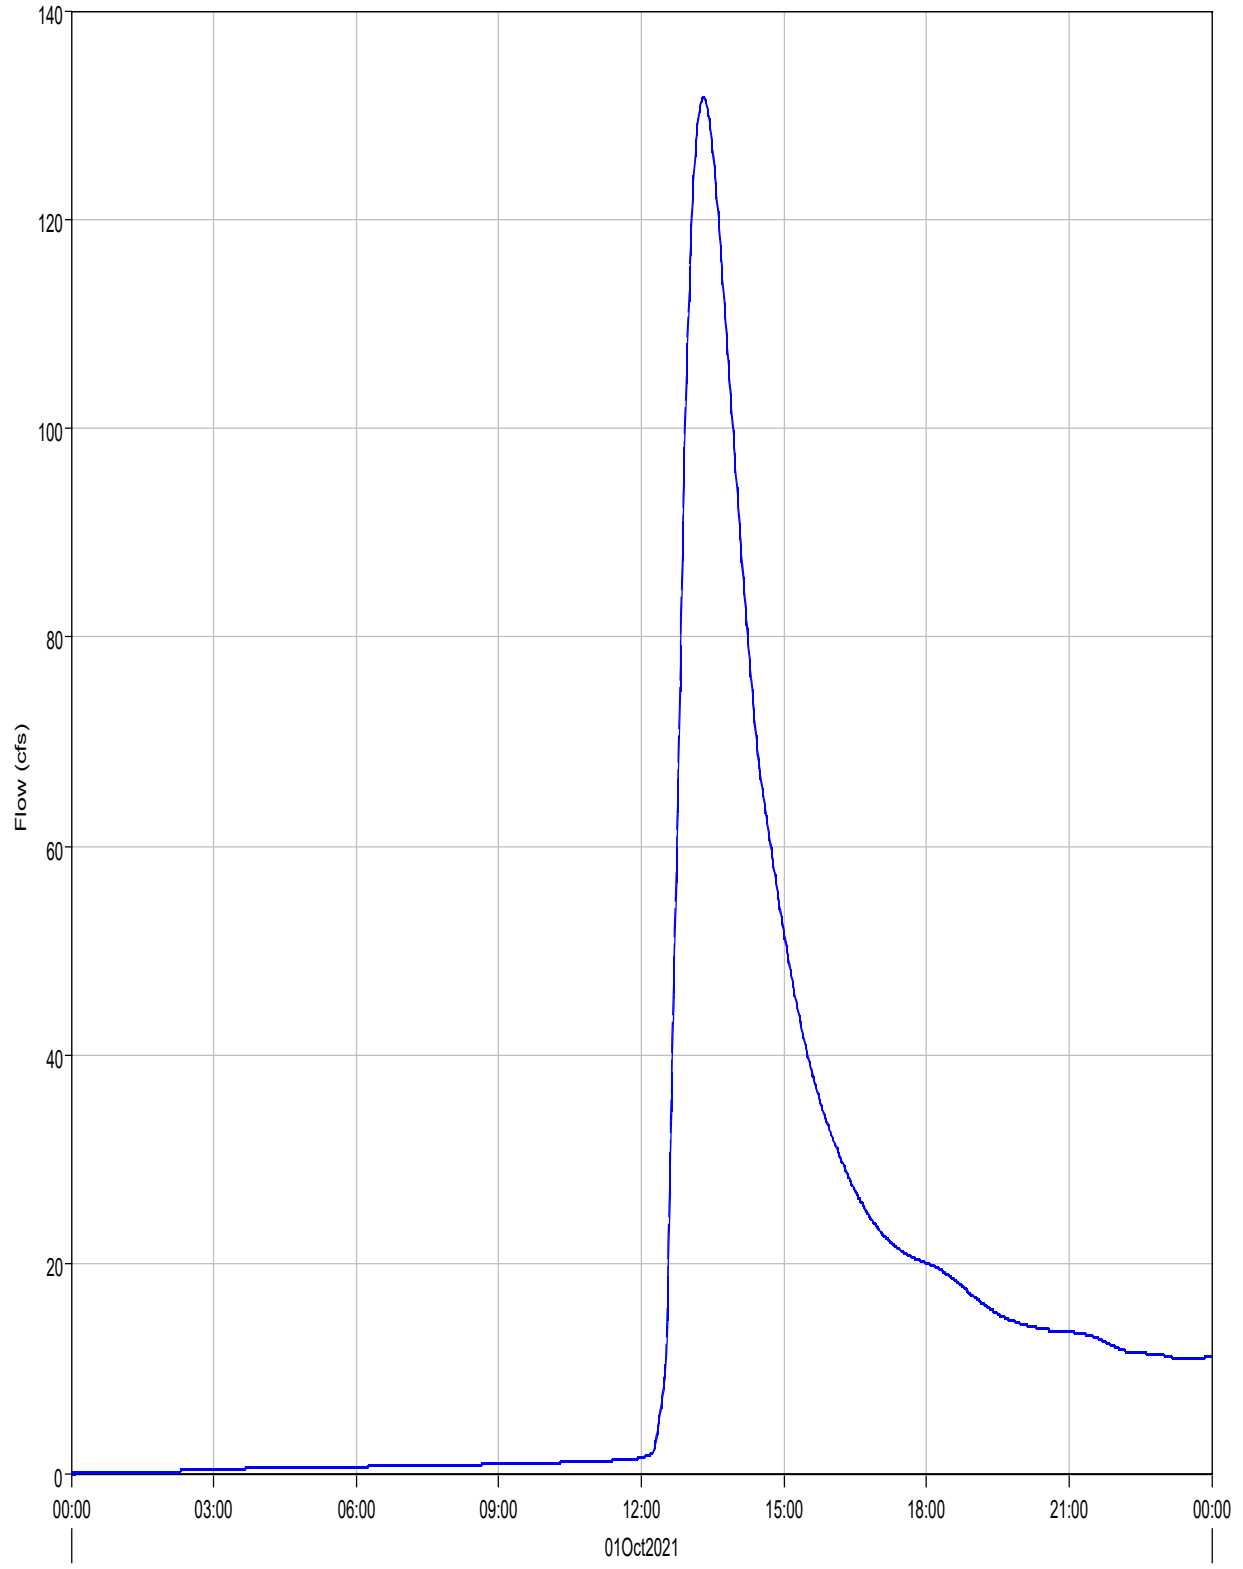

— Run:EV 5-yr Pr. Type II Element:R-PB10 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB10 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB10

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	131.7 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 13:18
Peak Outflow :	131.6 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:19
Total Inflow :	0.55 (IN)	Total Outflow :	0.55 (IN)

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB11


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	29.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:14
Peak Outflow :	29.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:15
Total Inflow :	0.80 (IN)	Total Outflow :	0.80 (IN)


Reach "R-PB11" Results for Run "EV 5-yr Pr. Type II"

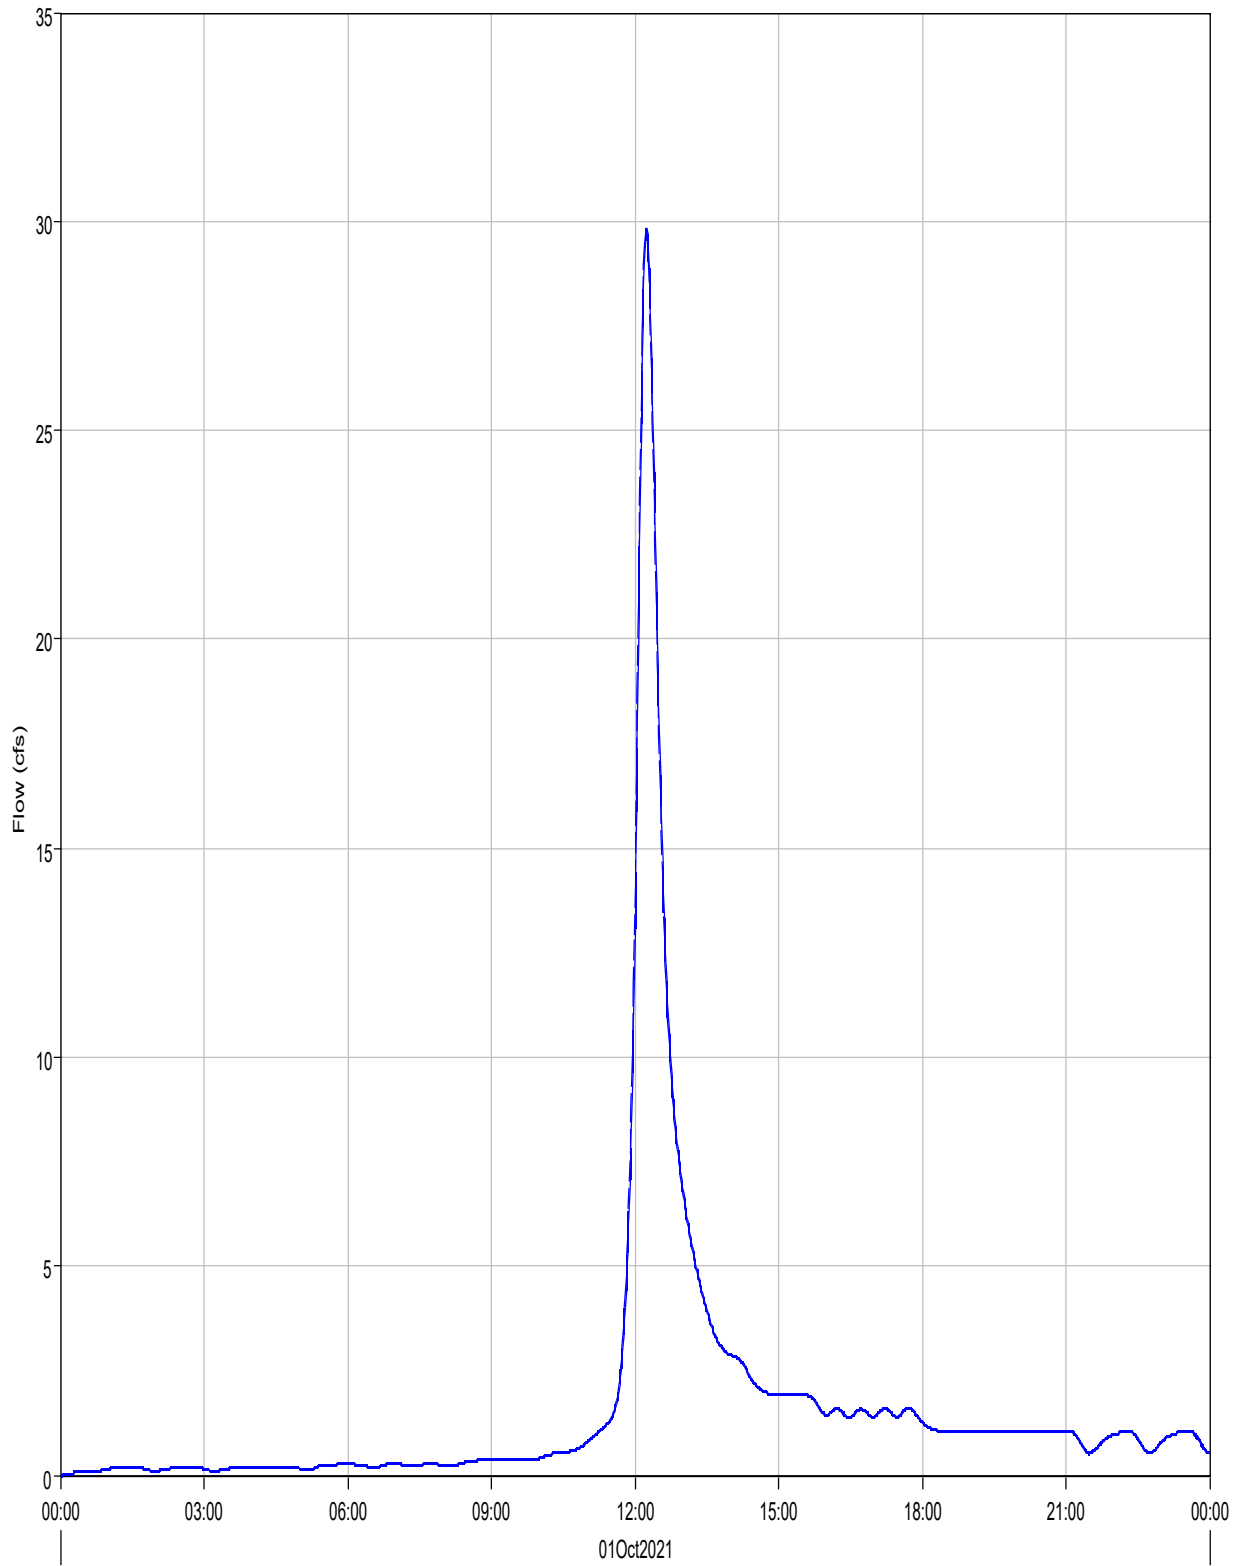

— Run:EV 5-yr Pr. Type II Element:R-PB11 Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB11 Result:Combined Inflow

Reach "R-PB12-A" Results for Run "EV 5-yr Pr. Type II"

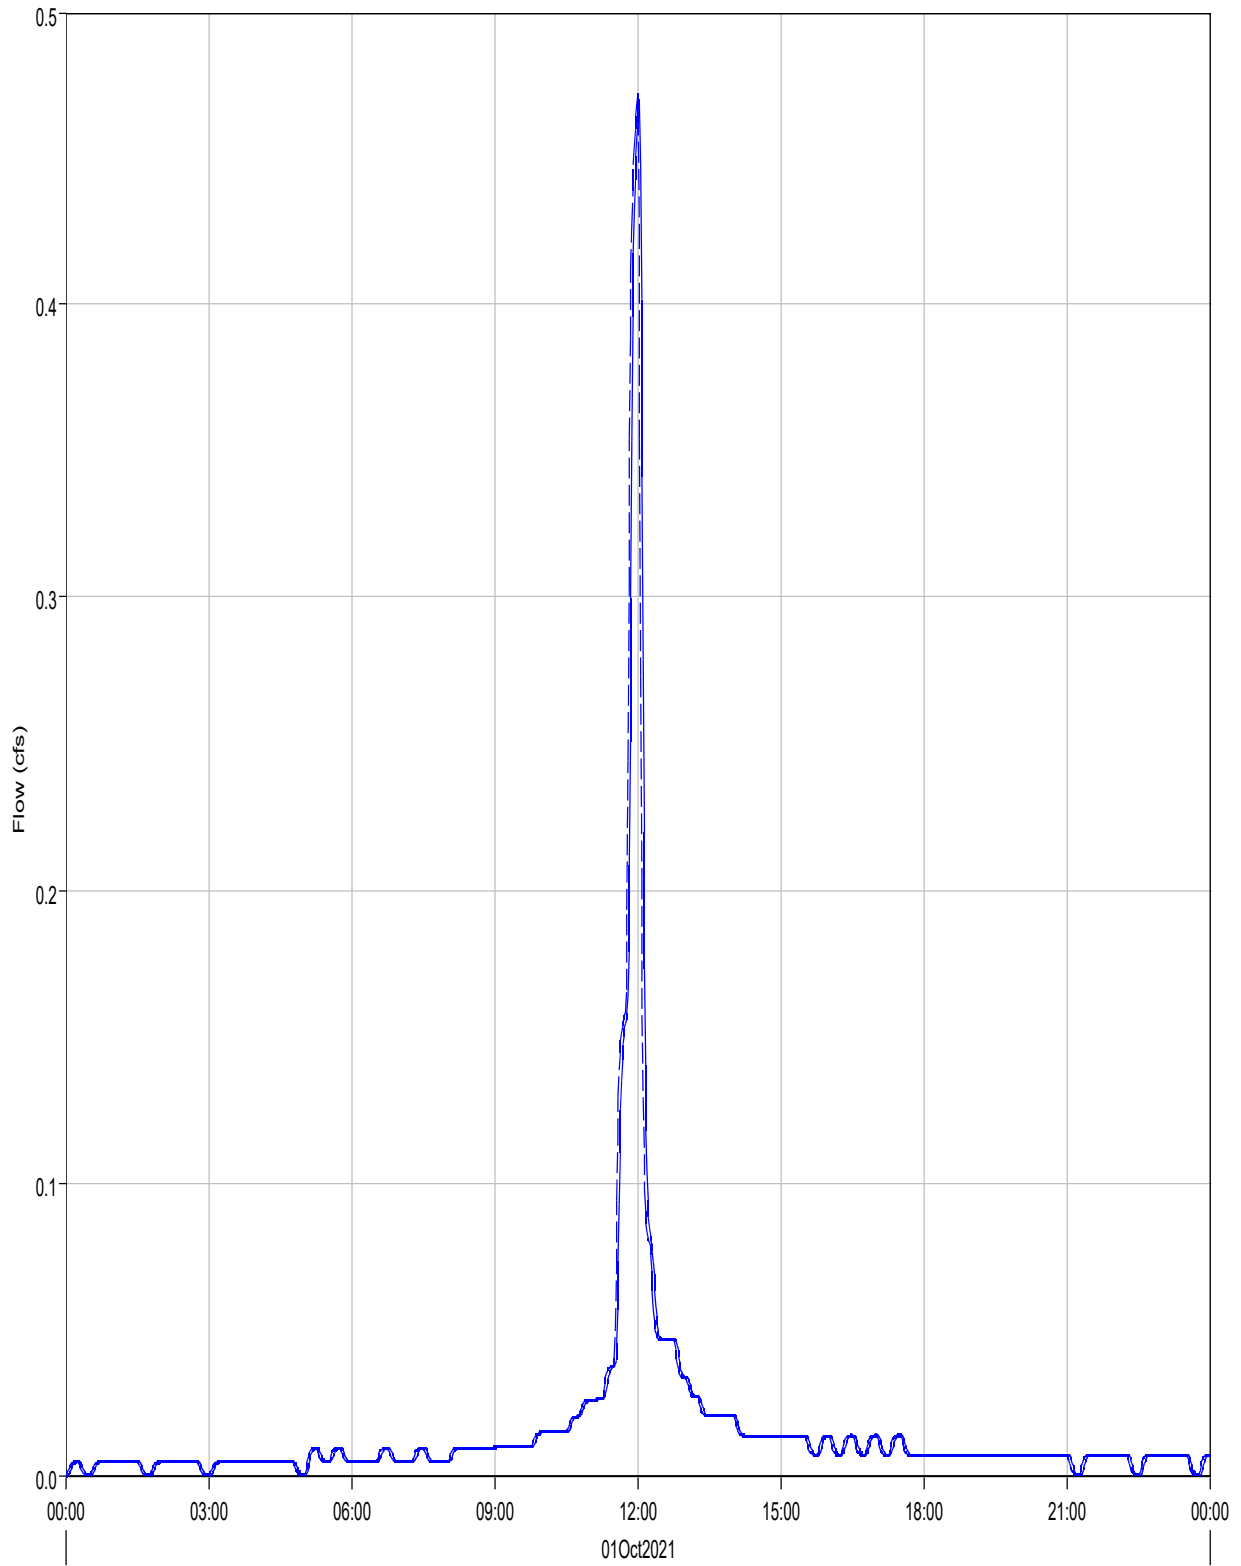

— Run:EV 5-yr Pr. Type II Element:R-PB12-A Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB12-A Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB12-A


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	0.5 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:00
Peak Outflow :	0.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:02
Total Inflow :	0.0 (AC-FT)	Total Outflow :	0.0 (AC-FT)

Reach "R-PB12-B" Results for Run "EV 5-yr Pr. Type II"

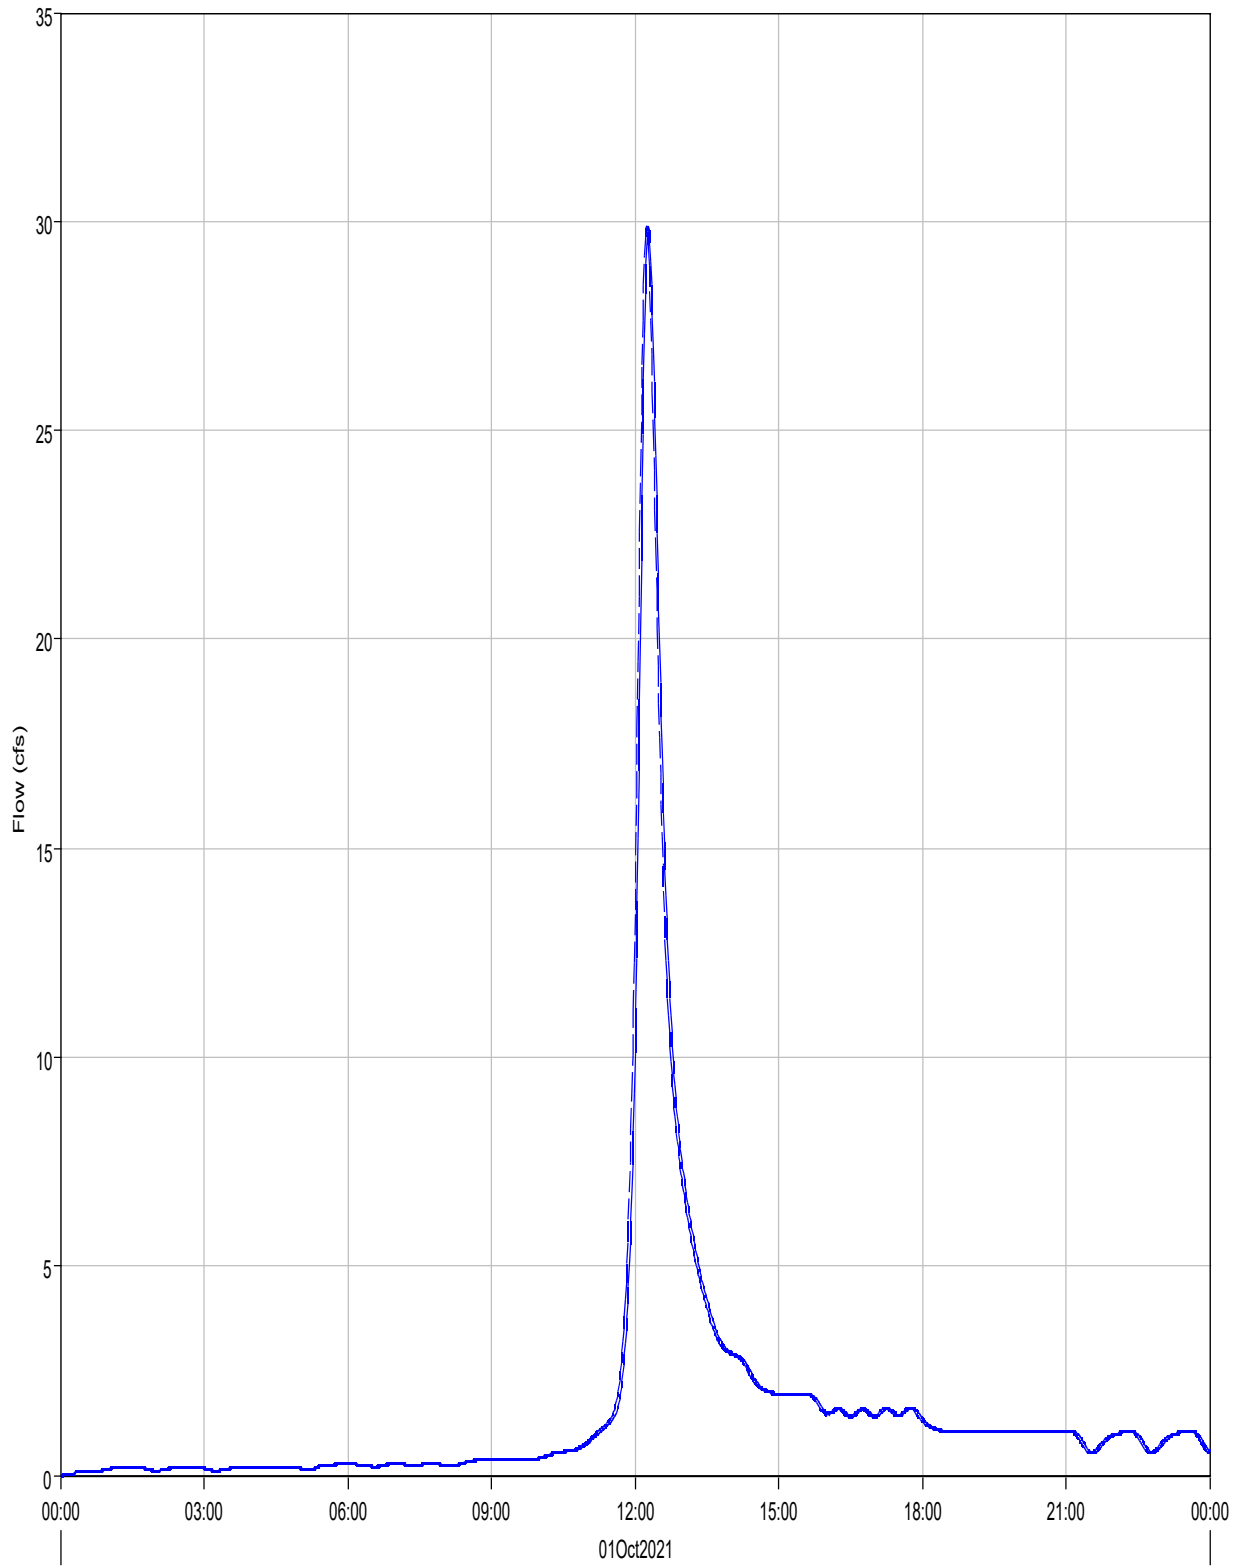

— Run:EV 5-yr Pr. Type II Element:R-PB12-B Result:Outflow

- - - Run:EV 5-YR PR. TYPE II Element:R-PB12-B Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB12-B


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	29.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:15
Peak Outflow :	29.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:17
Total Inflow :	3.3 (AC-FT)	Total Outflow :	3.3 (AC-FT)

Reach "R-PB13" Results for Run "EV 5-yr Pr. Type II"

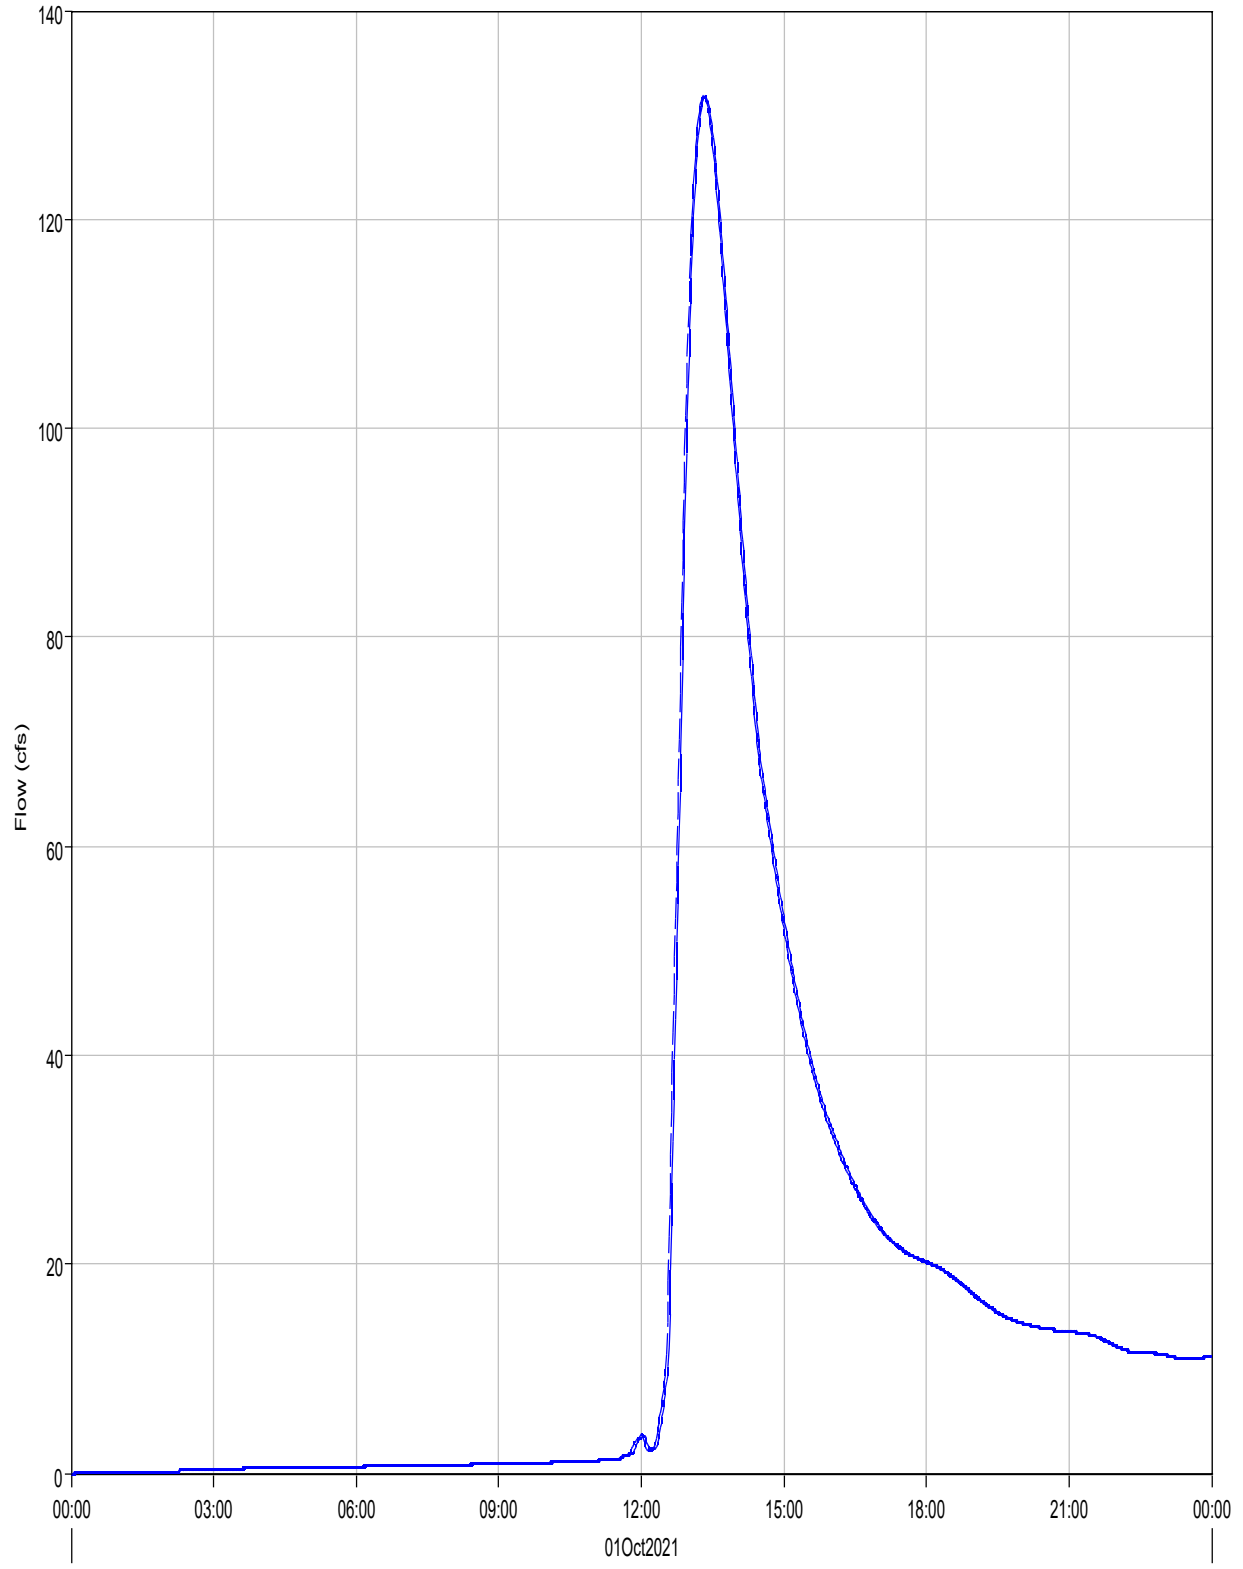

Run:EV 5-yr Pr. Type II Element:R-PB13 Result:Outflow

Run:EV 5-YR PR. TYPE II Element:R-PB13 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 5-yr Pr. Type II Reach: R-PB13

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 5-yr Type II
Compute Time: 14Mar2022, 16:43:16 Control Specifications: 24-hr Storm

Volume Units: IN

Computed Results

Peak Inflow :	131.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 13:19
Peak Outflow :	131.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:21
Total Inflow :	0.55 (IN)	Total Outflow :	0.55 (IN)


Project: Eagleview_Subdivision Simulation Run: EV 100-yr Pr. Type II

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
 End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
 Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (AC-FT)
CULV1	0.0021625	3.3	01Oct2021, 12:07	0.3
CULV4	0.0087281	11.3	01Oct2021, 12:08	1.0
CULV5	.000315625	0.9	01Oct2021, 12:00	0.1
OB1	0.0162031	18.8	01Oct2021, 12:08	1.7
OB2	0.0438438	52.7	01Oct2021, 12:08	4.7
OB3	0.0678750	67.1	01Oct2021, 12:12	6.9
OB4	0.0164062	18.9	01Oct2021, 12:10	1.8
OB5	0.22472	106.9	01Oct2021, 12:40	19.7
OB6	0.18501	114.9	01Oct2021, 12:29	17.8
OB7	0.65812	284.3	01Oct2021, 12:52	60.6
OB8	0.0516699	51.0	01Oct2021, 12:13	5.3
P1	0.0228484	26.4	01Oct2021, 12:09	2.4
P10 (CULV2)	0.15425	150.1	01Oct2021, 12:12	16.4
P11 (CULV3)	0.0260593	31.9	01Oct2021, 12:10	3.1
P12 (CULV8)	1.1270	420.3	01Oct2021, 13:06	96.8
P2	0.19753	189.1	01Oct2021, 12:13	21.4
P3	1.2312	437.7	01Oct2021, 13:07	107.9
P4	0.18248	184.6	01Oct2021, 12:12	19.8
P5 (CULV7)	0.0939437	95.9	01Oct2021, 12:13	9.8
P6	0.0771621	78.5	01Oct2021, 12:14	8.2
P7	1.1242	420.1	01Oct2021, 13:05	96.5
P8	1.1062	486.7	01Oct2021, 12:44	102.2
P9 (CULV6)	0.0768465	78.4	01Oct2021, 12:13	8.2
PB1	0.0066453	7.7	01Oct2021, 12:09	0.7
PB10	0.0179938	20.4	01Oct2021, 12:10	2.0
PB11	0.0251766	29.8	01Oct2021, 12:10	2.9

Hydrologic Element	Drainage Area (MI ²)	Peak Discharge (CFS)	Time of Peak	Volume (AC-FT)
PB12	.000315625	0.9	01Oct2021, 12:00	0.1
PB13	0.0027469	5.1	01Oct2021, 12:00	0.3
PB14	0.0270031	46.3	01Oct2021, 12:01	2.9
PB15	0.0150500	26.3	01Oct2021, 12:00	1.7
PB2	0.0016938	2.4	01Oct2021, 12:06	0.2
PB3	0.0021625	3.3	01Oct2021, 12:07	0.3
PB4	0.0164672	30.2	01Oct2021, 12:00	1.9
PB5	0.0096625	10.4	01Oct2021, 12:12	1.1
PB6	0.0173312	20.7	01Oct2021, 12:10	2.0
PB7	0.0087281	11.4	01Oct2021, 12:08	1.0
PB8	0.0184000	30.4	01Oct2021, 12:01	2.0
PB9	0.0199984	24.8	01Oct2021, 12:07	2.2
R-OB1	0.0162031	18.7	01Oct2021, 12:09	1.7
R-OB2	0.0438438	52.5	01Oct2021, 12:09	4.7
R-OB4-A	0.0842812	85.5	01Oct2021, 12:13	8.8
R-OB4-B	0.0939437	95.8	01Oct2021, 12:14	9.8
R-OB7	1.0678	479.0	01Oct2021, 12:44	98.1
R-OB8	0.0516699	50.9	01Oct2021, 12:15	5.3
R-PB10	1.1242	420.0	01Oct2021, 13:06	96.5
R-PB11	0.0768465	78.3	01Oct2021, 12:14	8.2
R-PB12-A	.000315625	0.9	01Oct2021, 12:02	0.1
R-PB12-B	0.0771621	78.4	01Oct2021, 12:15	8.2
R-PB13	1.1270	420.1	01Oct2021, 13:07	96.7
R-PB3	0.0021625	3.3	01Oct2021, 12:09	0.3
R-PB5	0.15425	150.0	01Oct2021, 12:13	16.4
R-PB7-A	0.0087281	11.3	01Oct2021, 12:09	1.0
R-PB7-B	0.0260593	31.9	01Oct2021, 12:11	3.1
R-PB7-C	0.18248	184.4	01Oct2021, 12:13	19.8
R-PB9	1.1062	486.6	01Oct2021, 12:44	102.2

Reach "CULV1" Results for Run "EV 100-yr Pr. Type II"

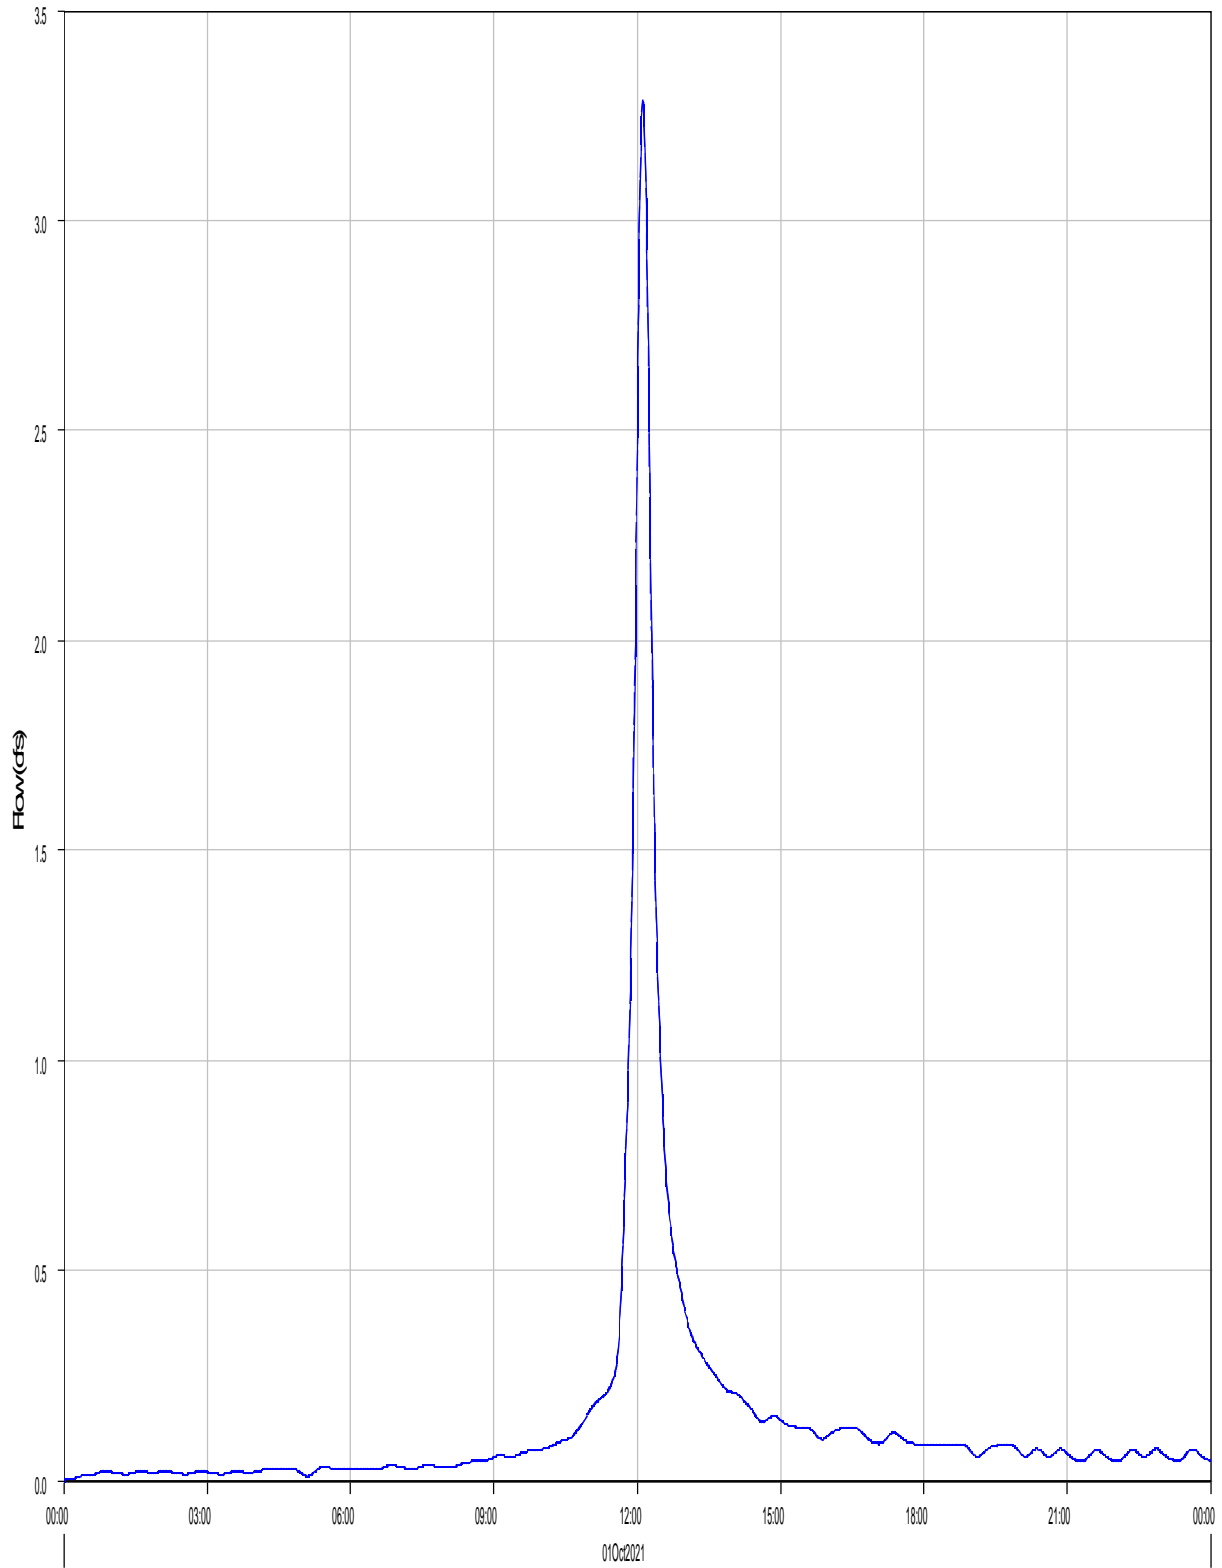

— Run:EV 100-yr Pr. Type II Element:CULV1 Result:Outflow

- - - Run:EV 100-yr Pr. Type II Element:CULV1 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: CULV1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	3.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:07
Peak Outflow :	3.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:07
Total Inflow :	0.3 (AC-FT)	Total Outflow :	0.3 (AC-FT)

Reach 'CULV4' Results for Run 'EV 100-yr Pr. Type II'

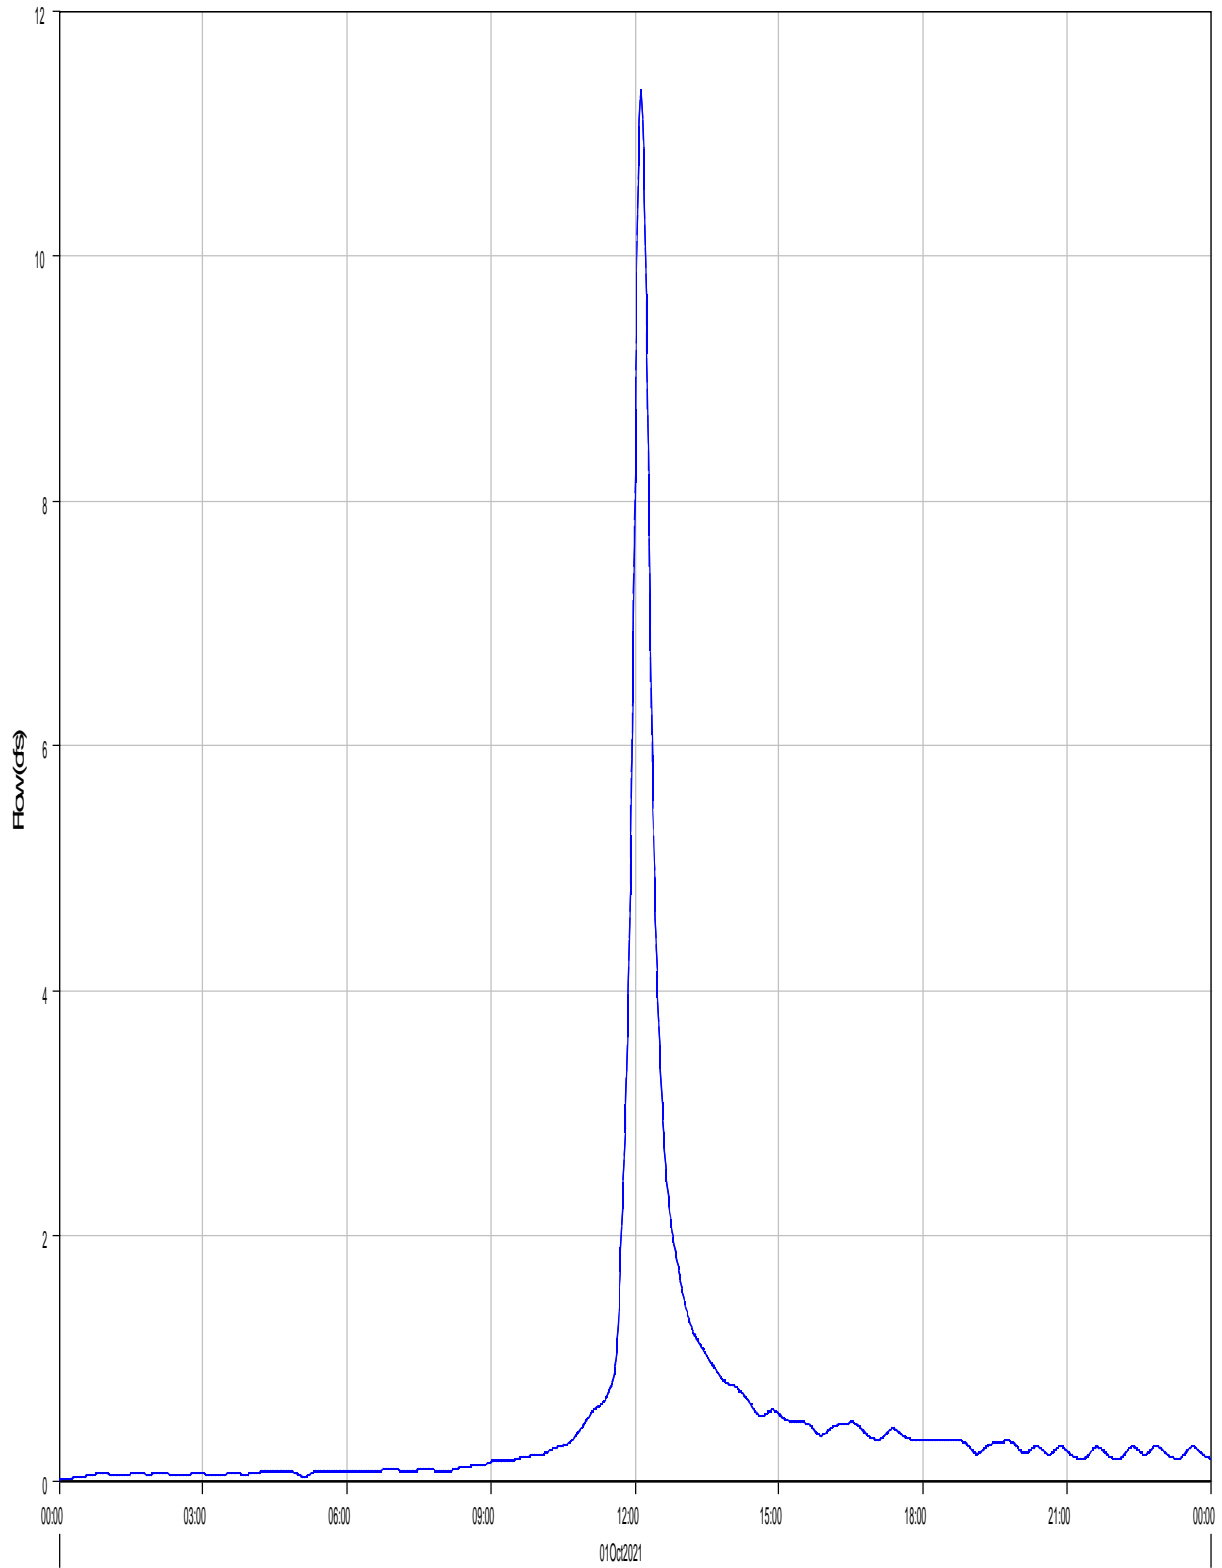

Run:EV 100-yr Pr. Type II Element:CULV4 Result:Outflow

Run:EV 100-yr Pr. Type II Element:CULV4 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: CULV4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	11.4 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	11.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:08
Total Inflow :	1.0 (AC-FT)	Total Outflow :	1.0 (AC-FT)

Reach "CULV5" Results for Run "EV 100-yr Pr. Type II"

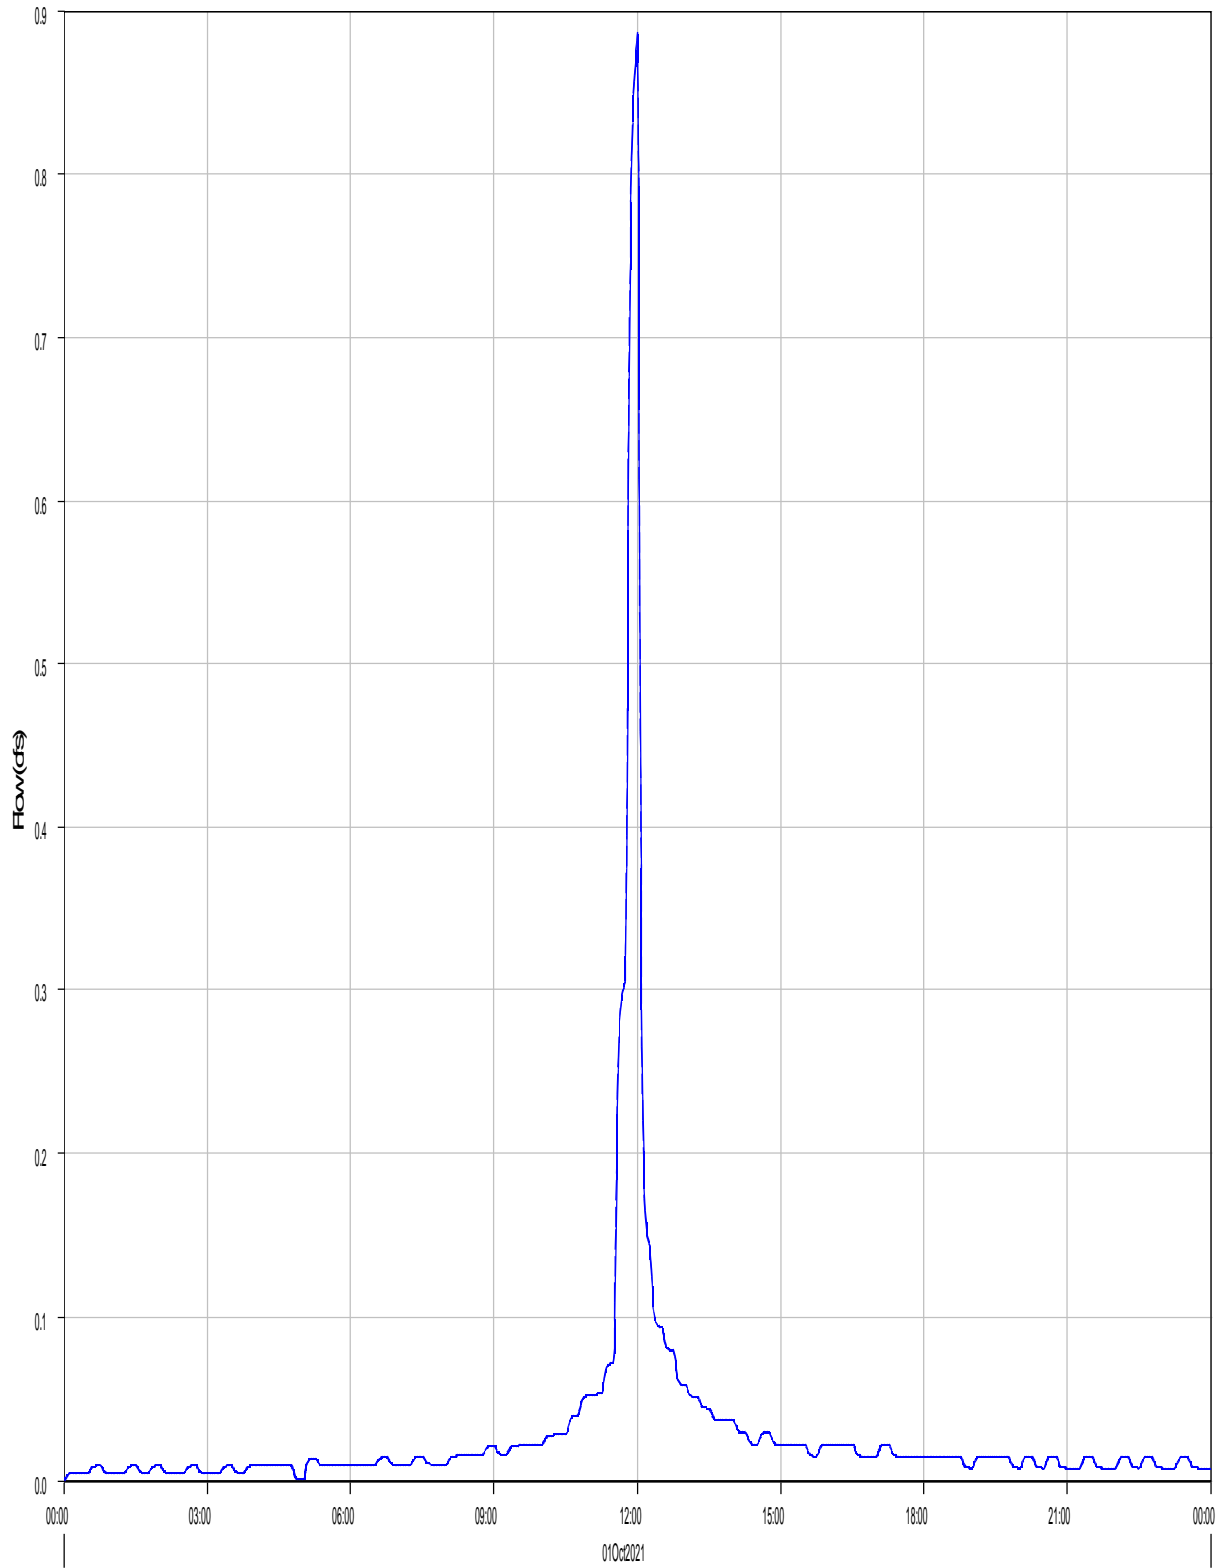

— Run:EV 100-yr Pr. Type II Element:CULV5 Result:Outflow

- - - Run:EV 100-yr Pr. Type II Element:CULV5 Result:Combined Inflow



Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: CULV5
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	0.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:00
Peak Outflow :	0.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:00
Total Inflow :	0.1 (AC-FT)	Total Outflow :	0.1 (AC-FT)

Subbasin "OB1" Results for Run "EV 100-yr Pr. Type II"

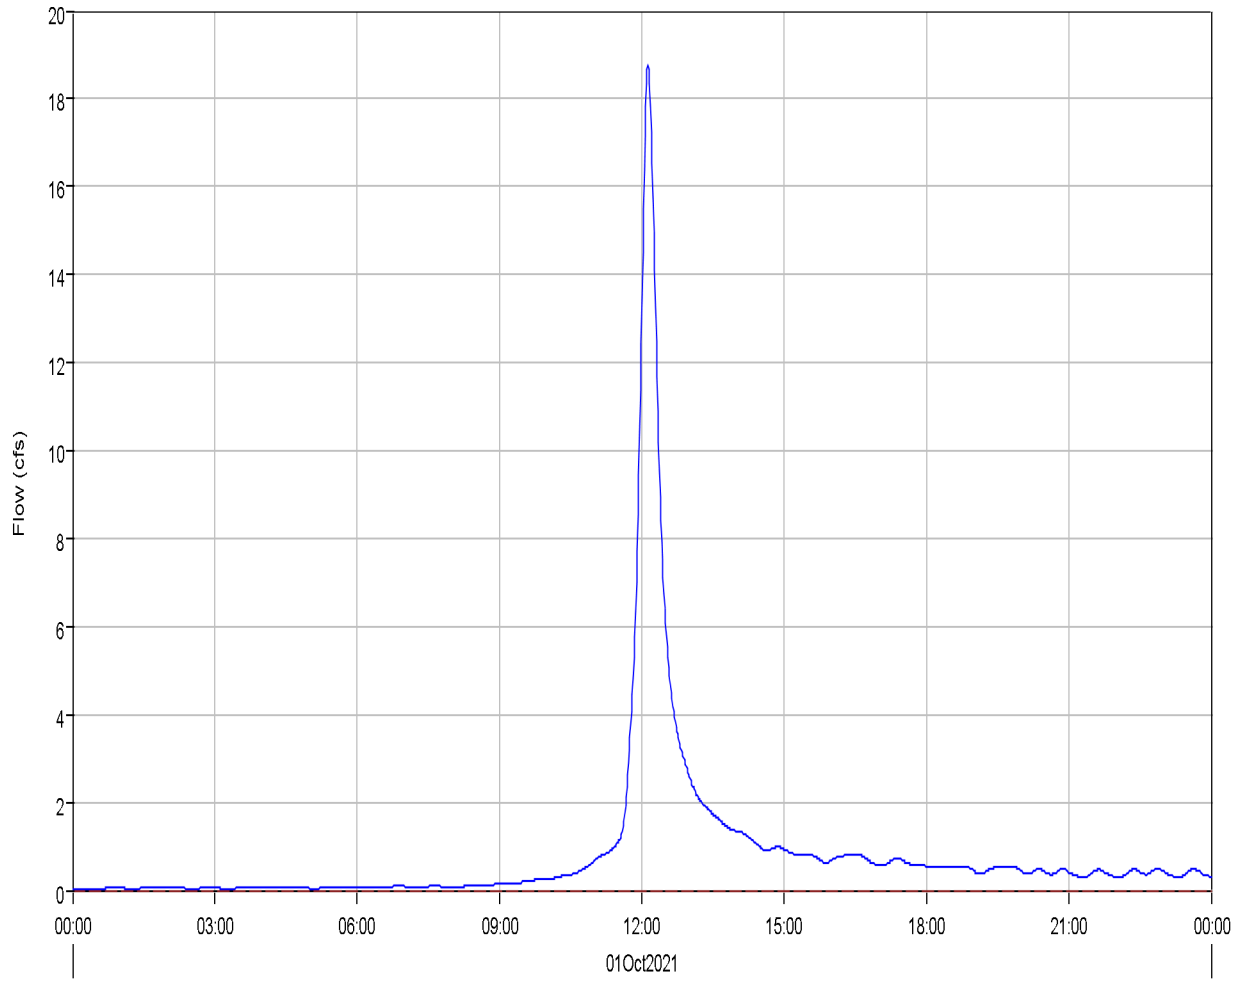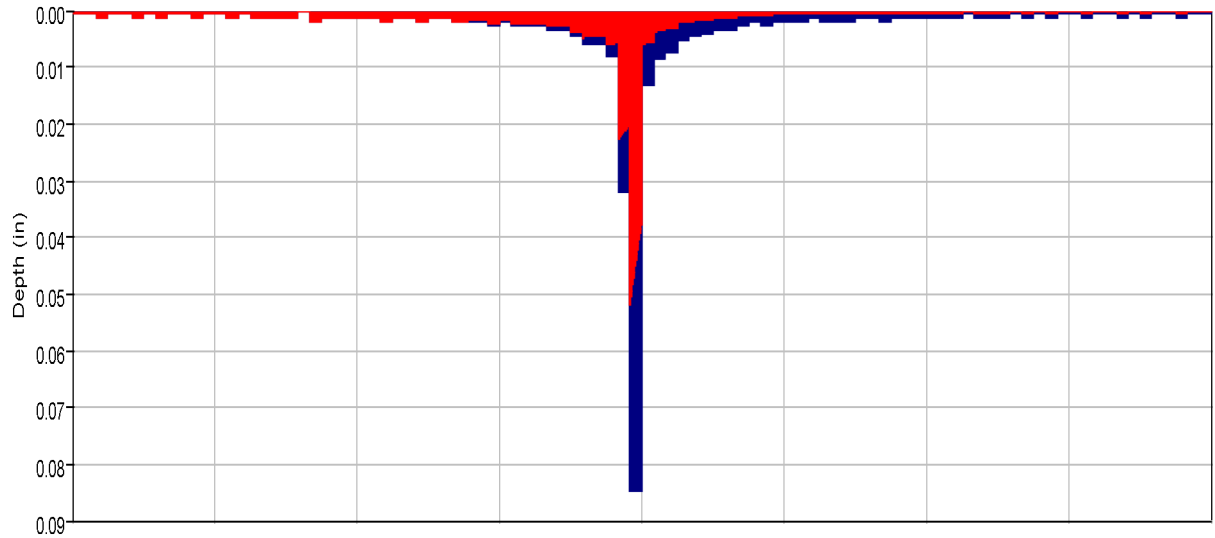

Run:EV 100-yr Pr. Type II Element:OB1 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB1 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB1 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB1 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB1



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	18.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	4.0 (AC-FT)	Total Direct Runoff :	1.7 (AC-FT)
Total Loss :	2.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.7 (AC-FT)	Discharge :	1.7 (AC-FT)

Subbasin "OB2" Results for Run "EV 100-yr Pr. Type II"

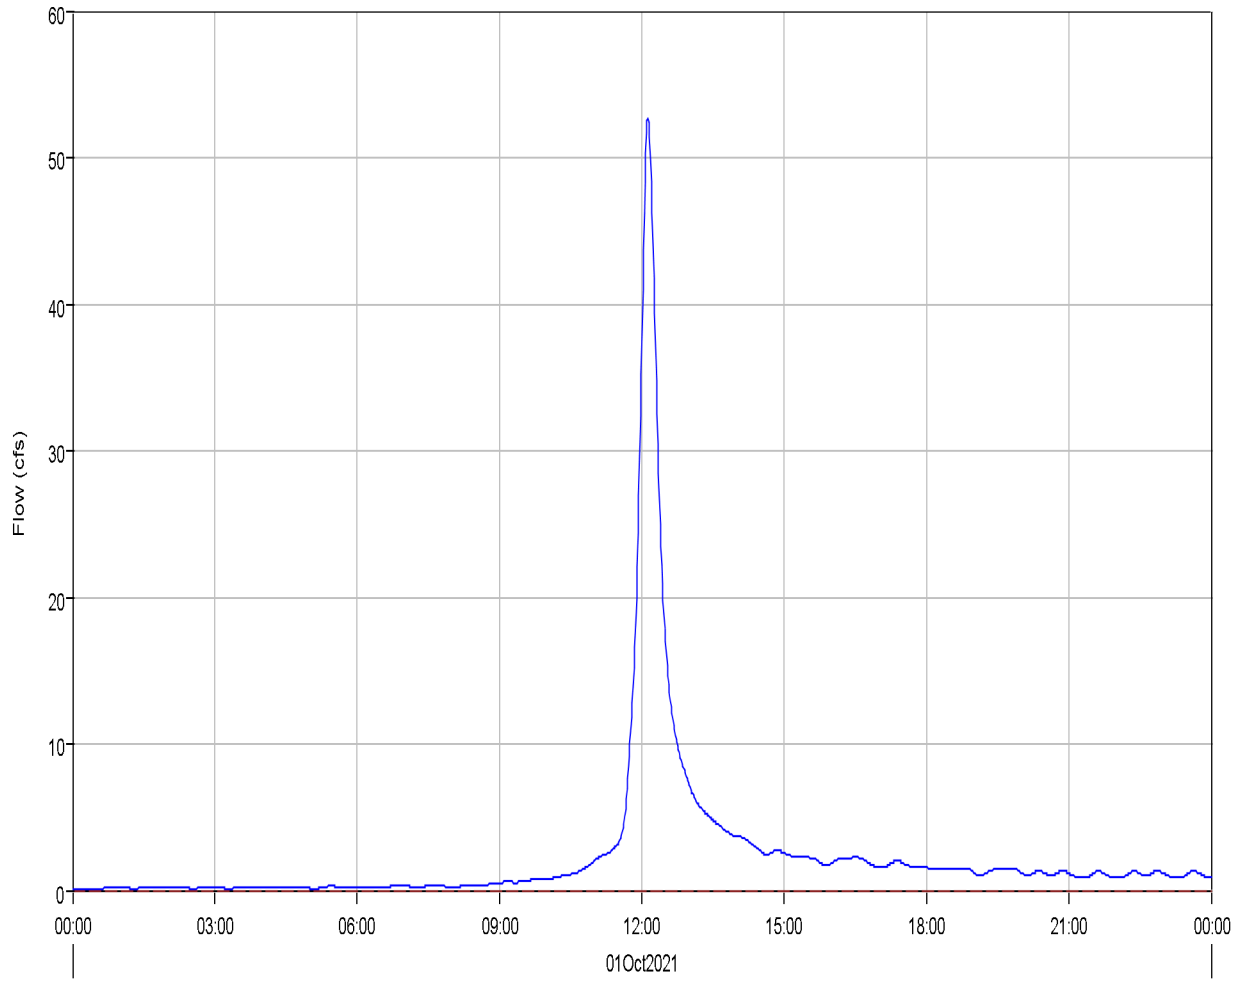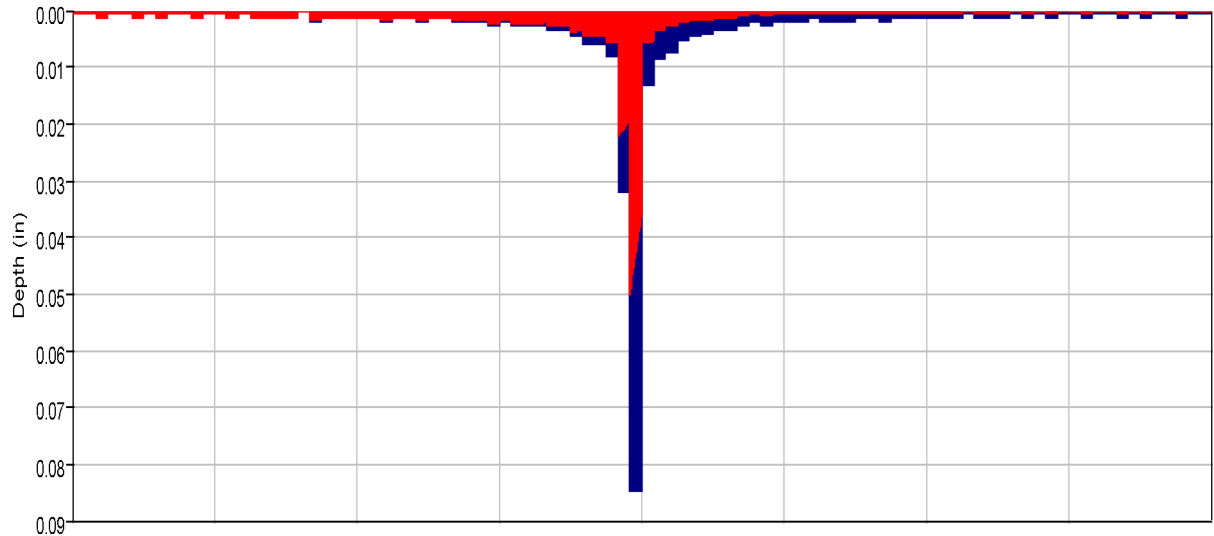

Run:EV 100-yr Pr. Type II Element:OB2 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB2 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB2 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB2 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB2


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	52.7 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	10.8 (AC-FT)	Total Direct Runoff :	4.7 (AC-FT)
Total Loss :	6.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	4.7 (AC-FT)	Discharge :	4.7 (AC-FT)

Subbasin "OB3" Results for Run "EV 100-yr Pr. Type II"

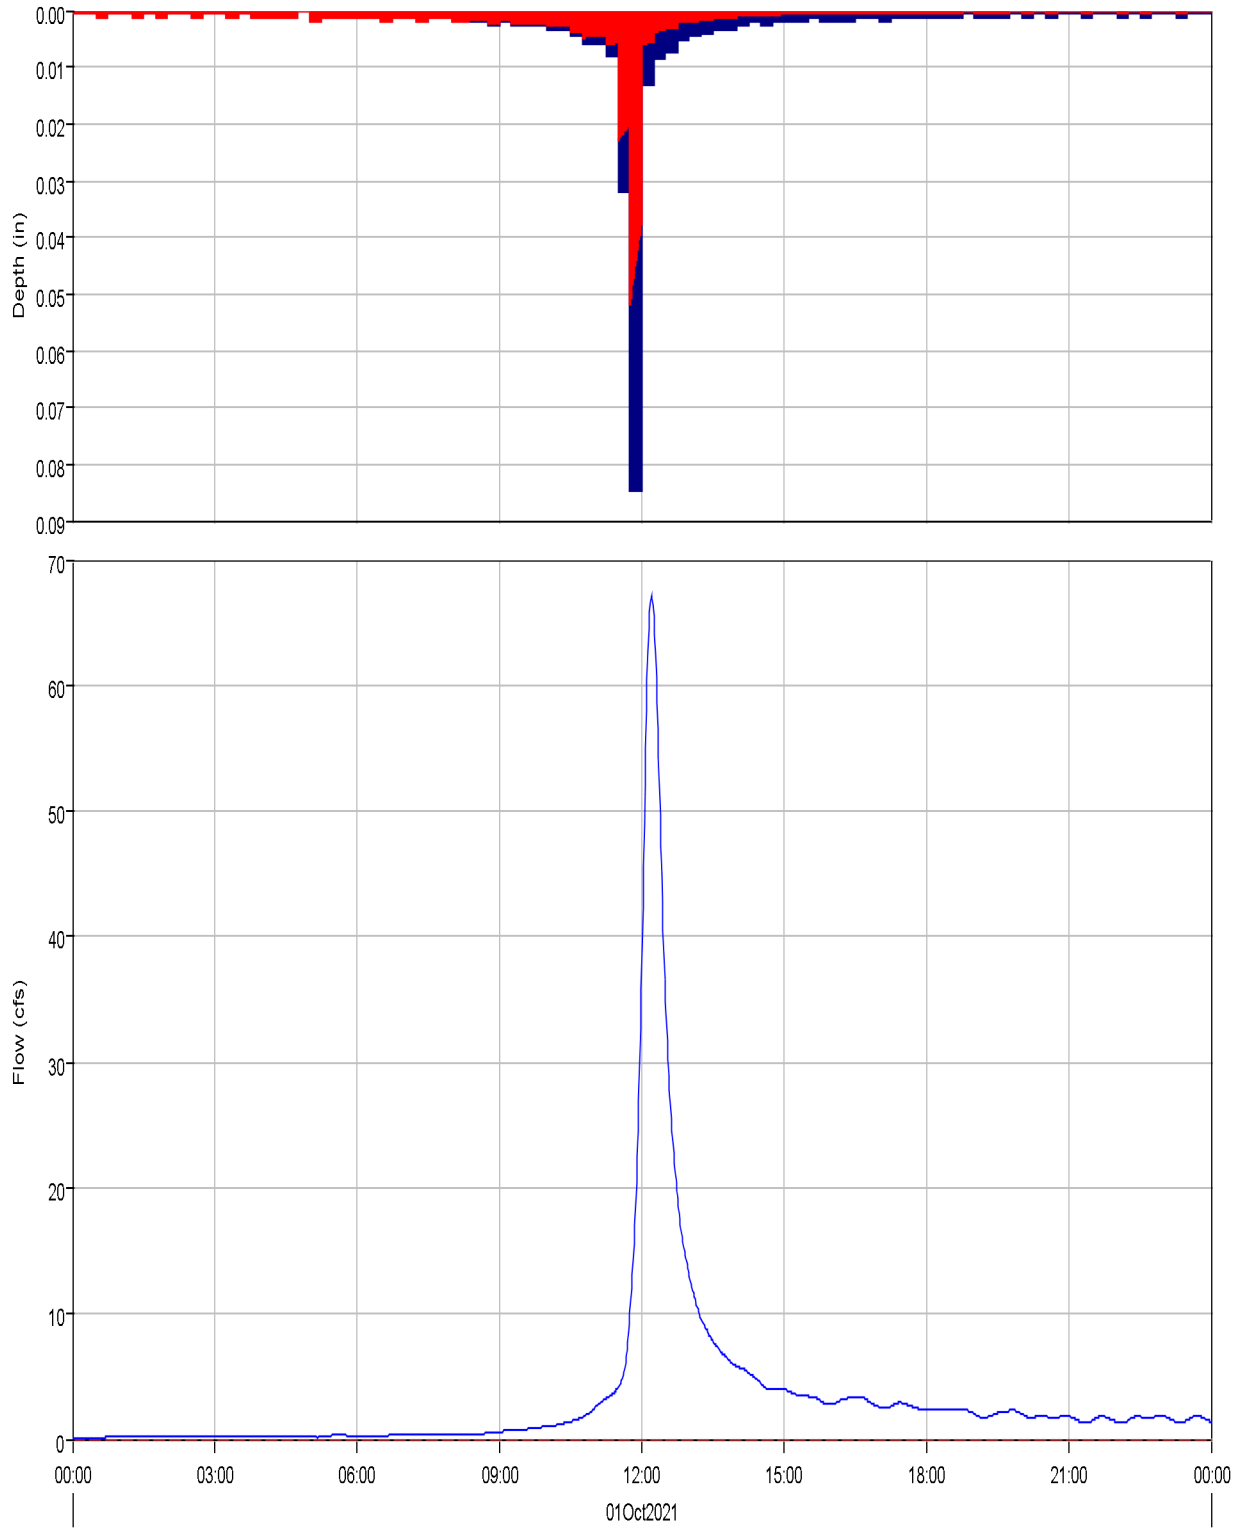

Run:EV 100-yr Pr. Type II Element:OB3 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB3 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB3 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB3 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB3



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	67.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:12
Total Precipitation :	16.7 (AC-FT)	Total Direct Runoff :	6.9 (AC-FT)
Total Loss :	9.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	7.0 (AC-FT)	Discharge :	6.9 (AC-FT)

Subbasin "OB4" Results for Run "EV 100-yr Pr. Type II"

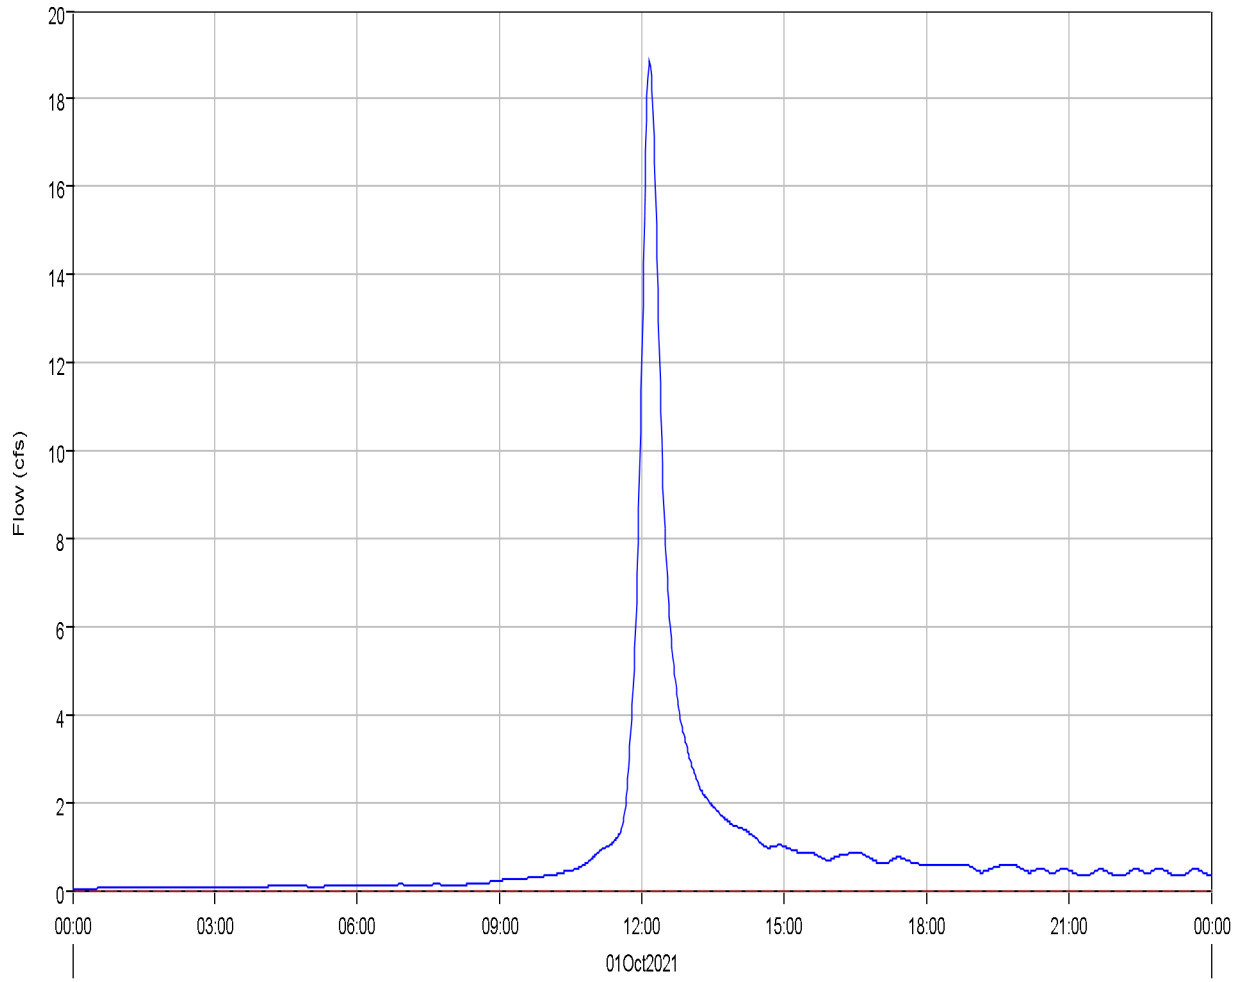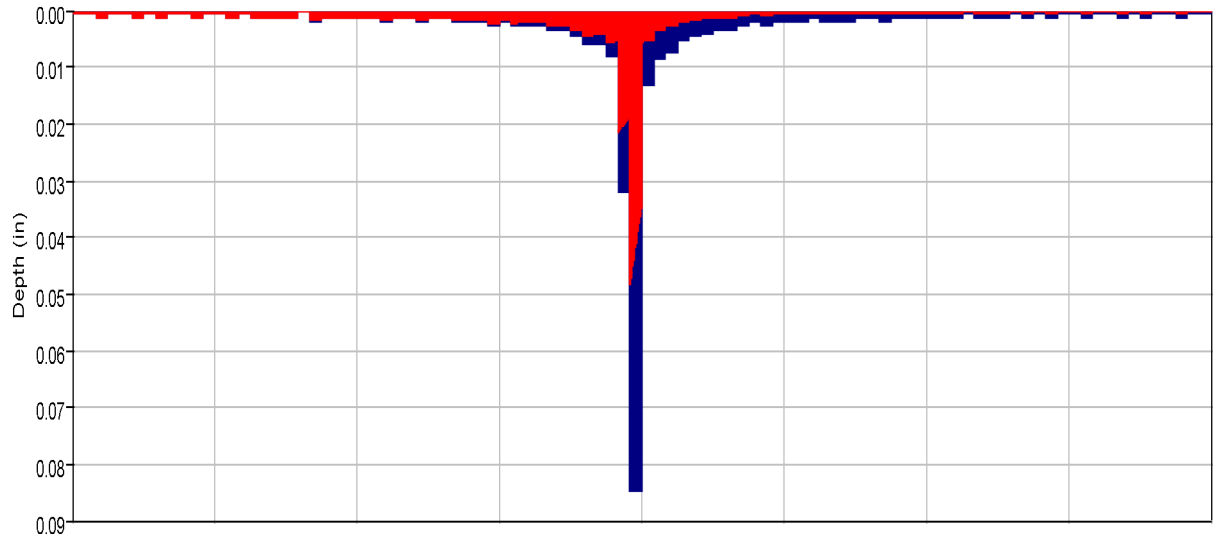

Run:EV 100-yr Pr. Type II Element:OB4 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB4 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB4 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB4 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB4



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	18.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	4.0 (AC-FT)	Total Direct Runoff :	1.8 (AC-FT)
Total Loss :	2.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.8 (AC-FT)	Discharge :	1.8 (AC-FT)

Subbasin "OB5" Results for Run "EV 100-yr Pr. Type II"

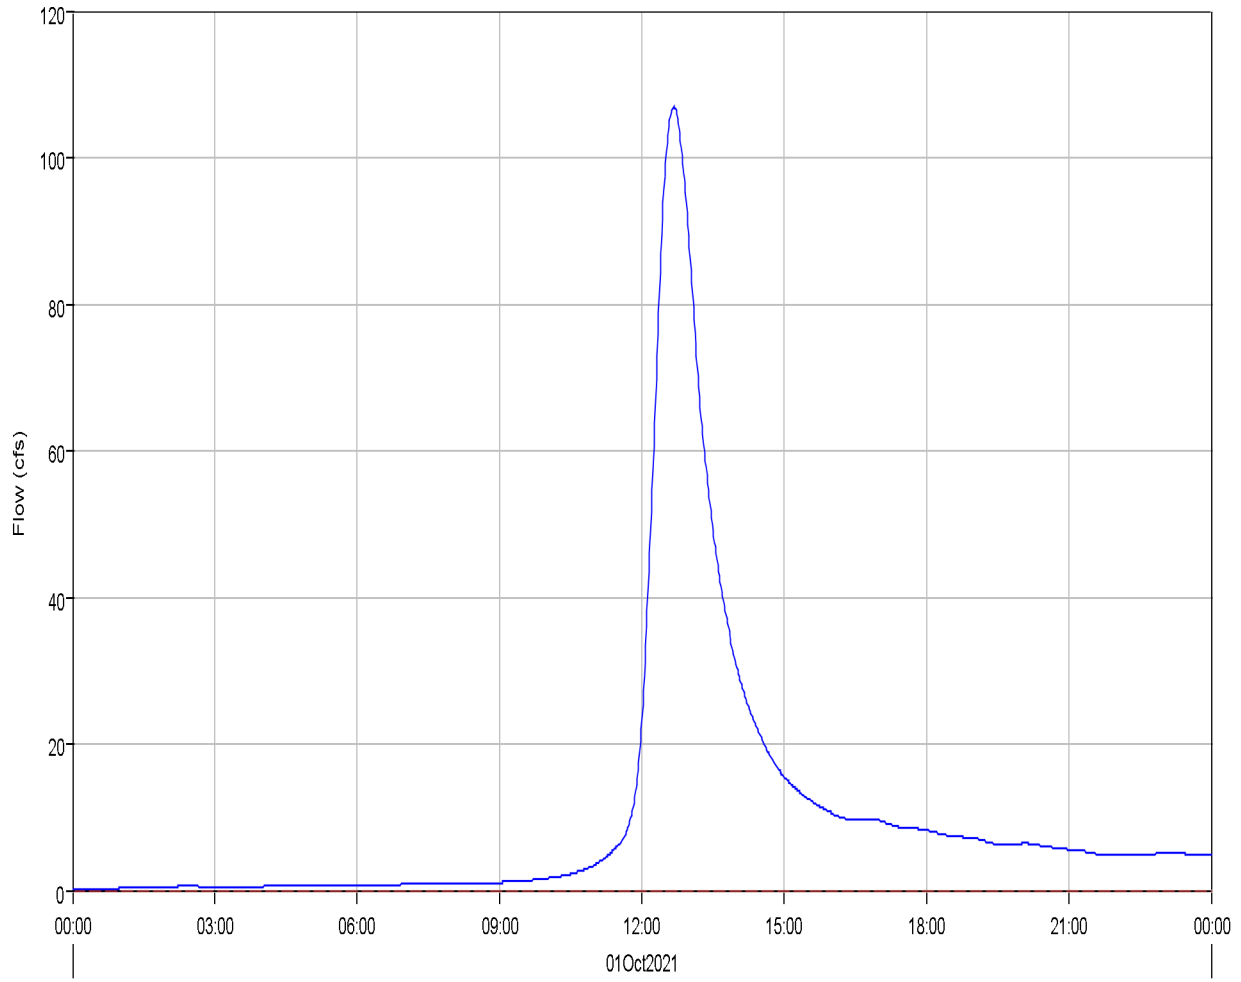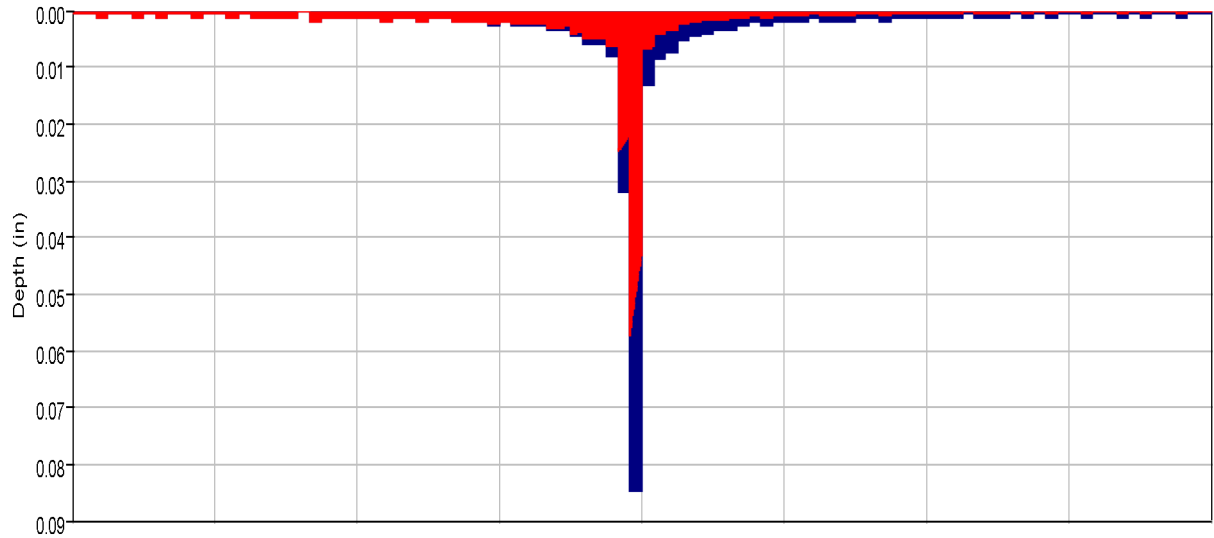

Run:EV 100-yr Pr. Type II Element:OB5 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB5 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB5 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB5 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB5



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	106.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:40
Total Precipitation :	55.1 (AC-FT)	Total Direct Runoff :	19.7 (AC-FT)
Total Loss :	35.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	20.1 (AC-FT)	Discharge :	19.7 (AC-FT)

Subbasin "OB6" Results for Run "EV 100-yr Pr. Type II"

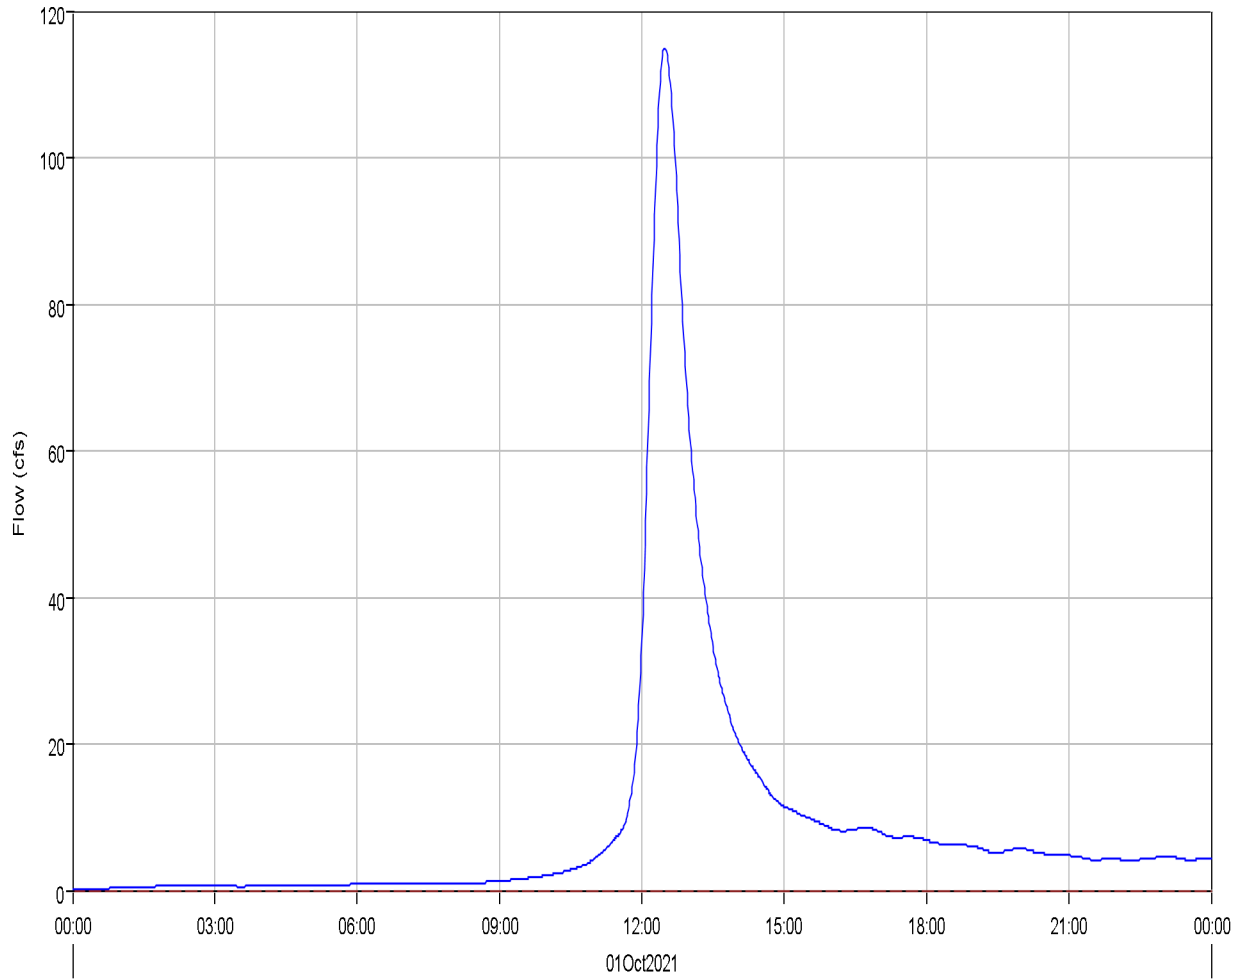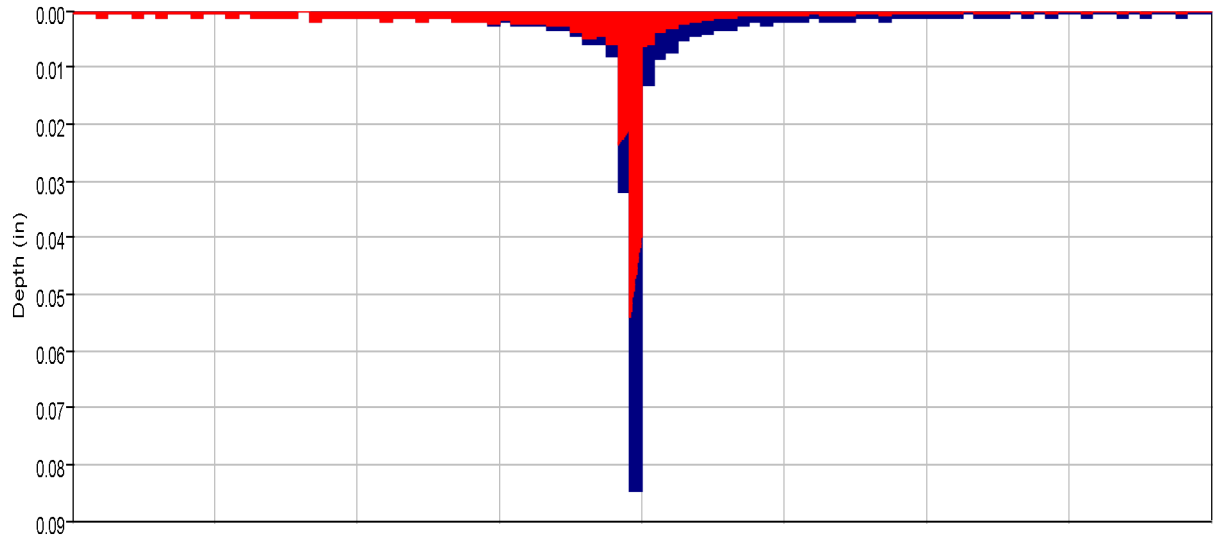

Run:EV 100-yr Pr. Type II Element:OB6 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB6 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB6 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB6 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB6


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	114.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:29
Total Precipitation :	45.4 (AC-FT)	Total Direct Runoff :	17.8 (AC-FT)
Total Loss :	27.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	18.1 (AC-FT)	Discharge :	17.8 (AC-FT)

Subbasin "OB7" Results for Run "EV 100-yr Pr. Type II"

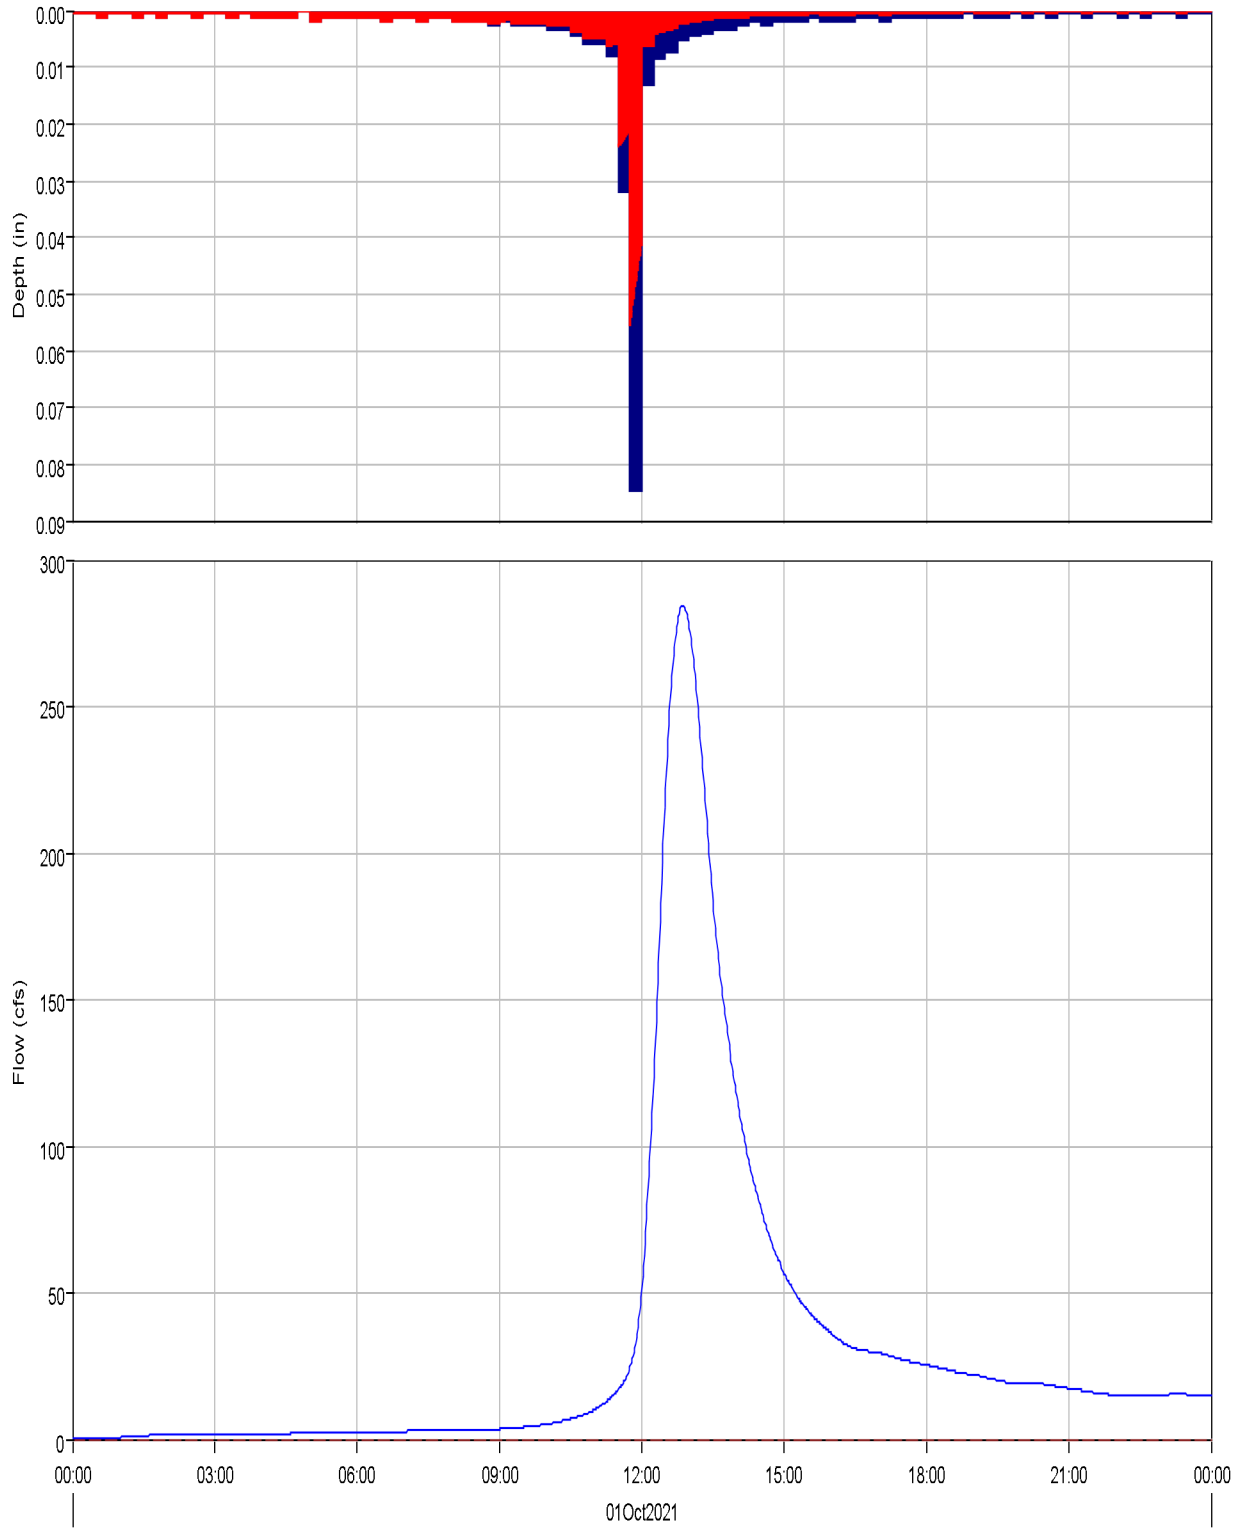

Run:EV 100-yr Pr. Type II Element:OB7 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB7 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB7 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB7 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB7



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	284.3 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:52
Total Precipitation :	161.5 (AC-FT)	Total Direct Runoff :	60.6 (AC-FT)
Total Loss :	99.5 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	62.0 (AC-FT)	Discharge :	60.6 (AC-FT)

Subbasin "OB8" Results for Run "EV 100-yr Pr. Type II"

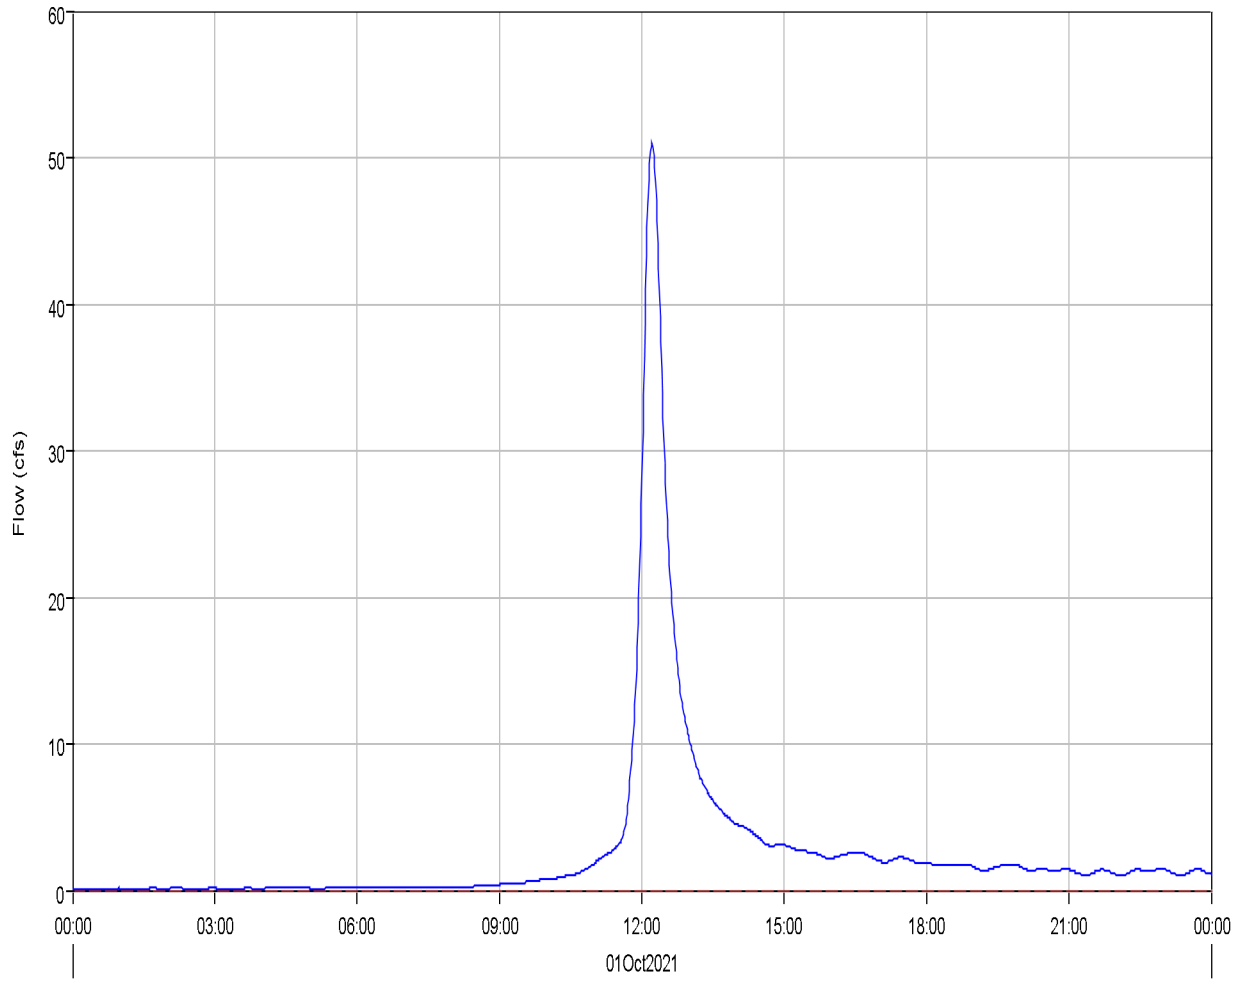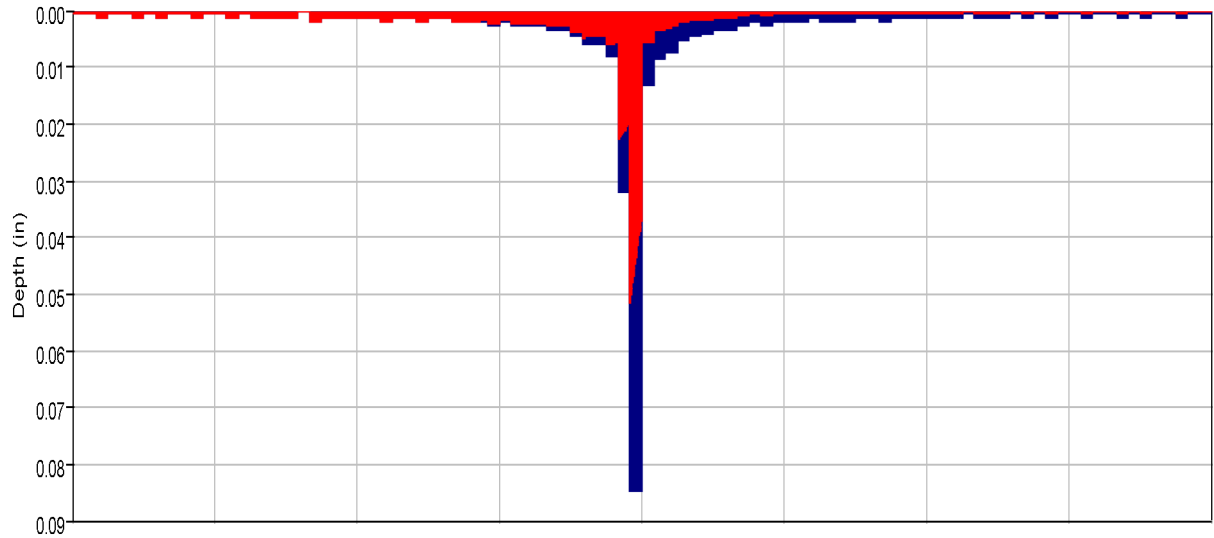

Run:EV 100-yr Pr. Type II Element:OB8 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:OB8 Result:Outflow

Run:EV 100-yr Pr. Type II Element:OB8 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:OB8 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: OB8


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	51.0 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:13
Total Precipitation :	12.7 (AC-FT)	Total Direct Runoff :	5.3 (AC-FT)
Total Loss :	7.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	5.3 (AC-FT)	Discharge :	5.3 (AC-FT)

Junction 'P1' Results for Run 'EV 100-yr Pr. Type II'

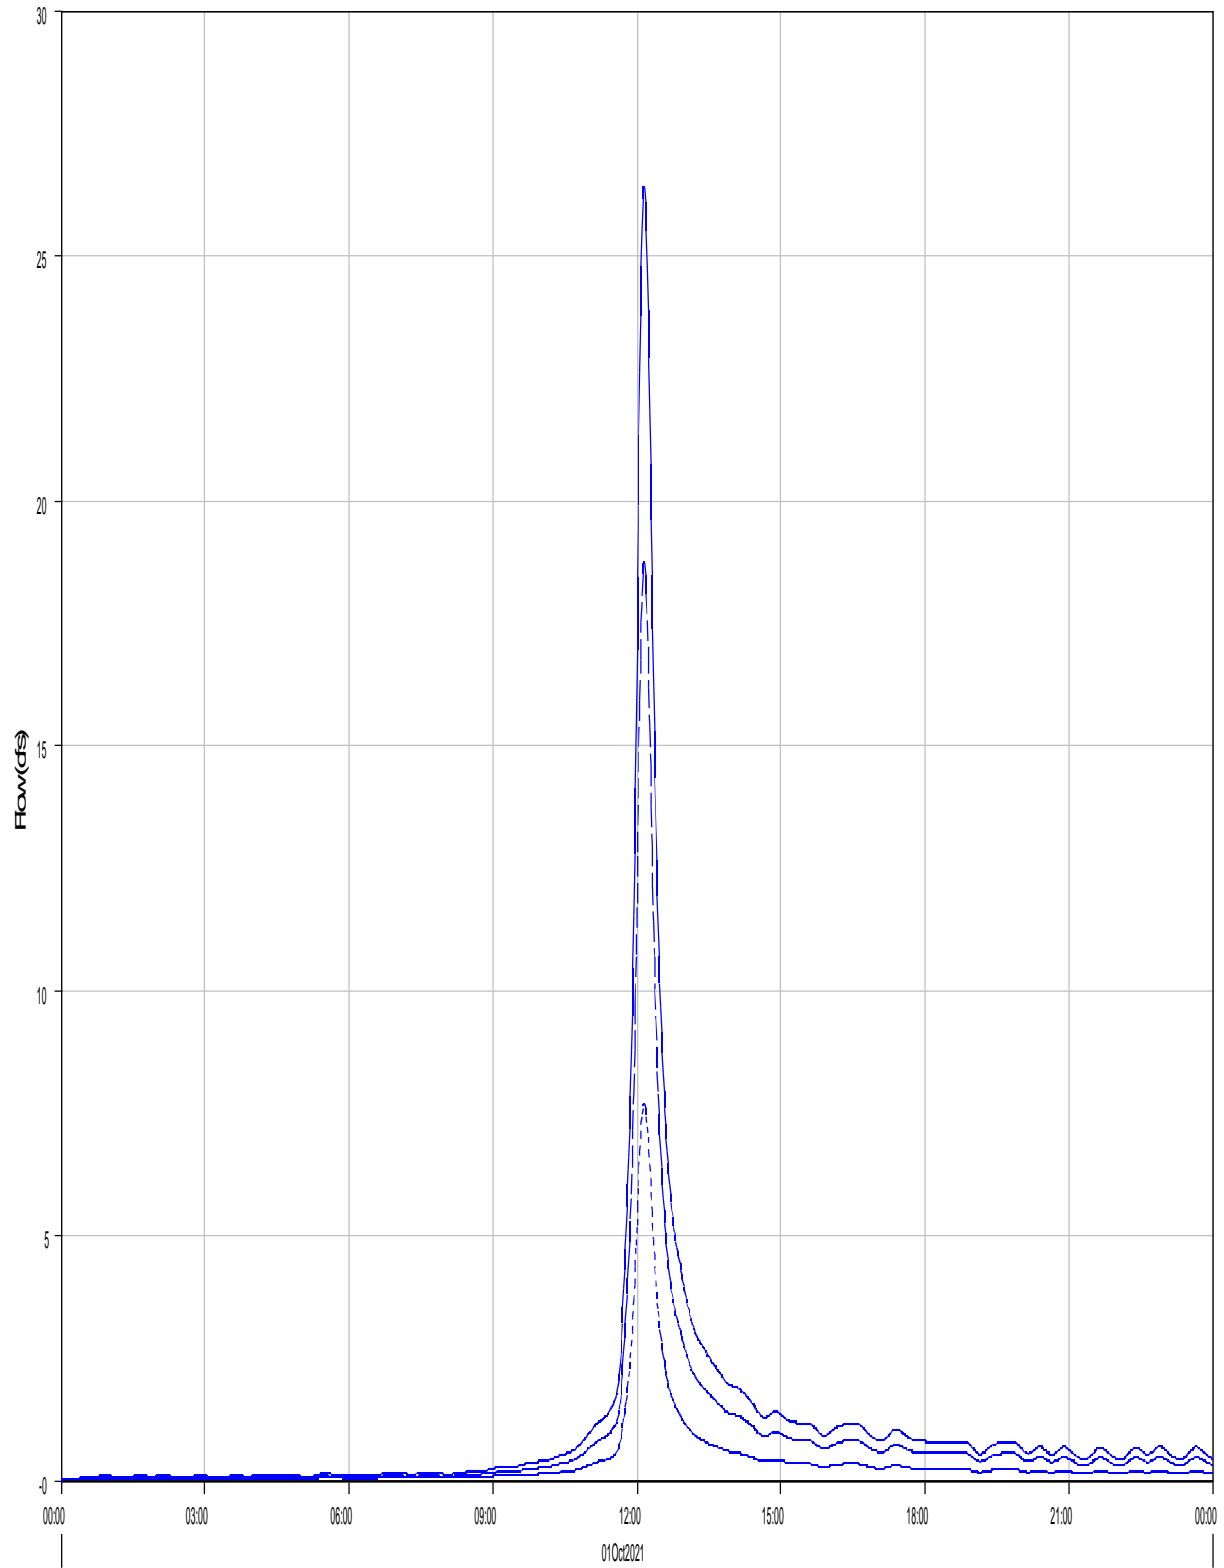

Run:EV 100-yr Pr. Type II Element:P1 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-CB1 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB1 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Junction: P1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 26.4 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:09
Total Outflow : 2.4 (AC-FT)

Junction 'P2' Results for Run 'EV 100-yr Pr. Type II'

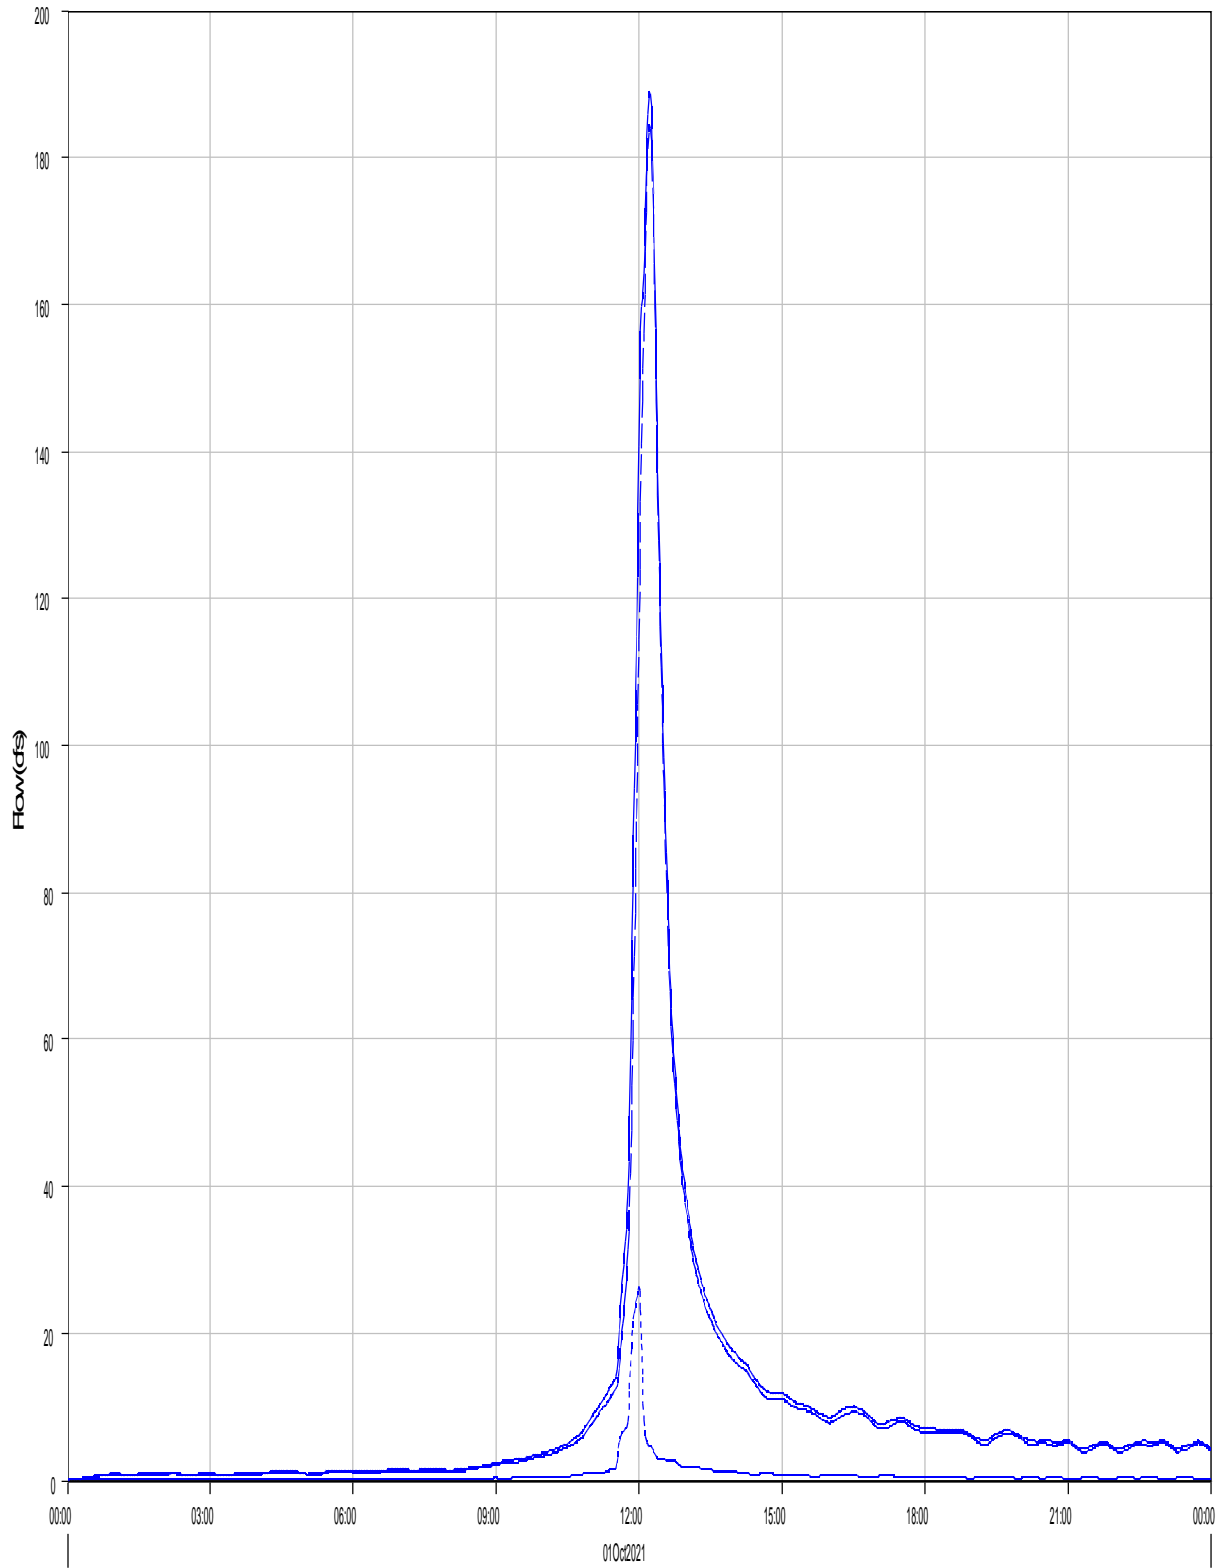

Run:EV 100-yr Pr. Type II Element:P2 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB7C Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB15 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Junction: P2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 189.1 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:13
Total Outflow : 21.4 (AC-FT)

Junction 'P3' Results for Run 'EV 100-yr Pr. Type II'

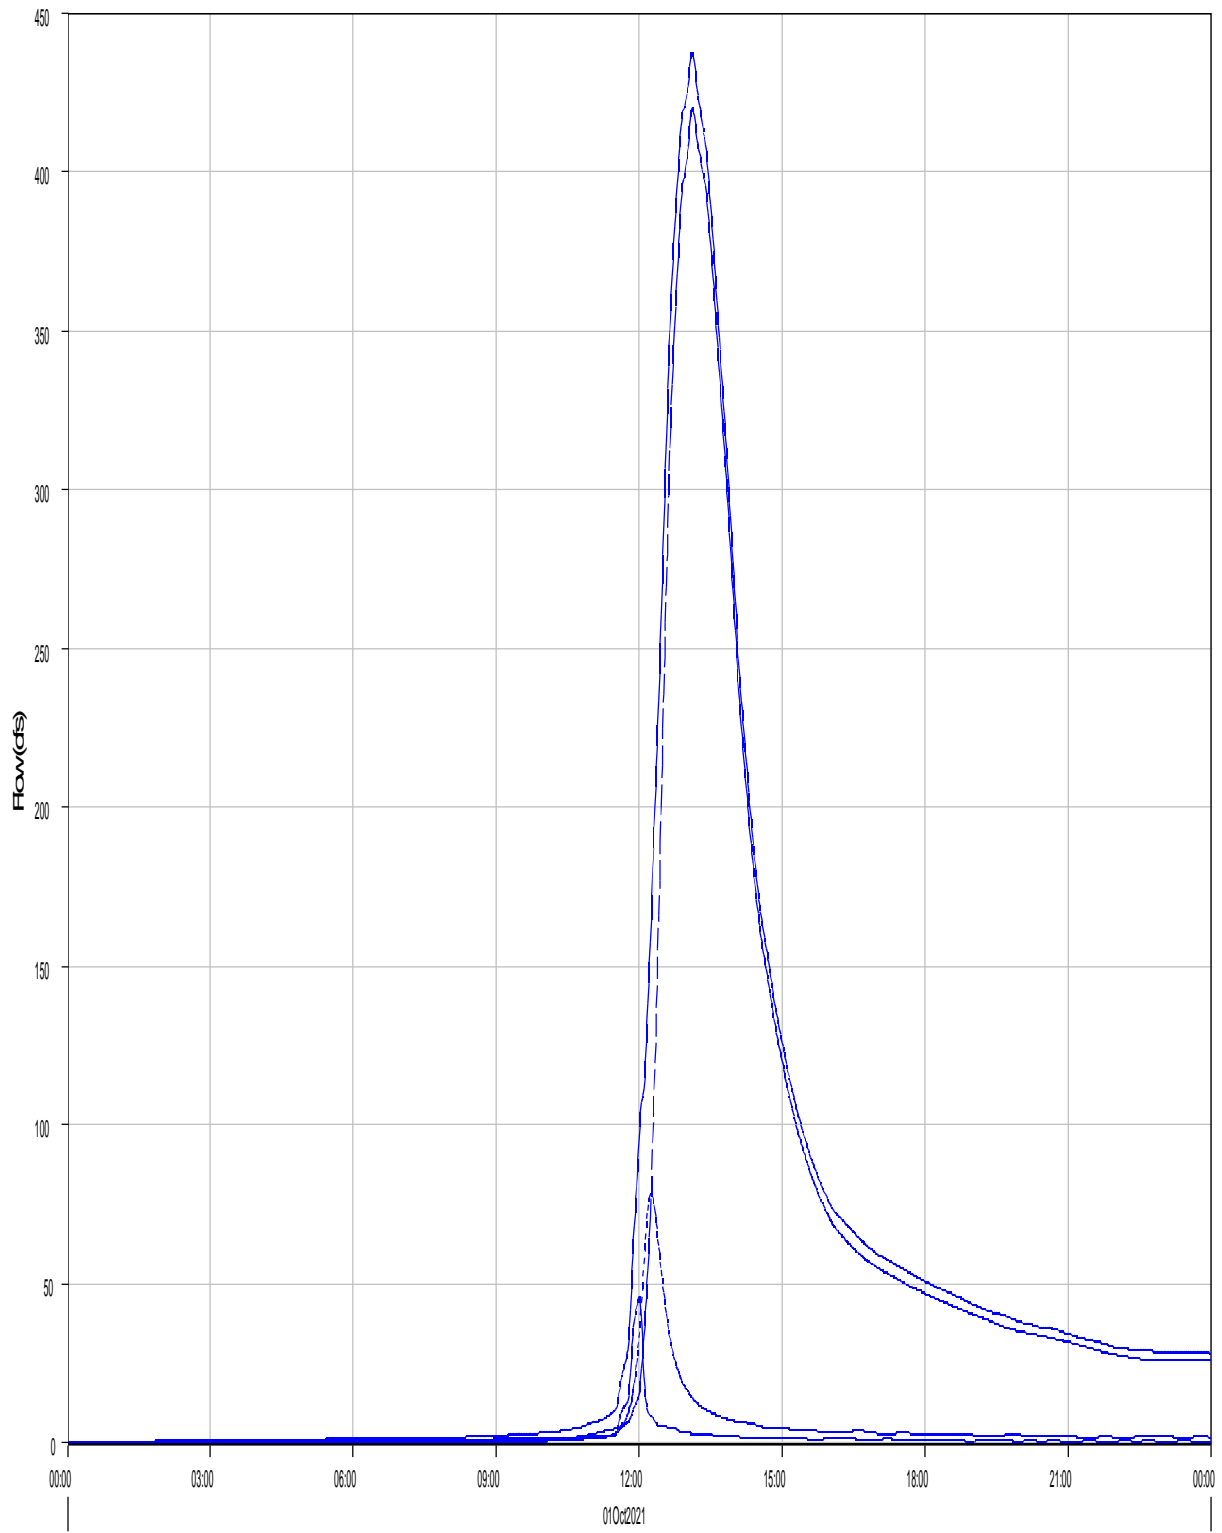

Run:EV 100-yr Pr. Type II Element:P3 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB13 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB12-B Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB14 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Junction: P3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 437.7 (CFS) Date/Time of Peak Outflow : 01Oct2021, 13:07
Total Outflow : 107.9 (AC-FT)

Junction 'P4' Results for Run 'EV 100-yr Pr. Type II'

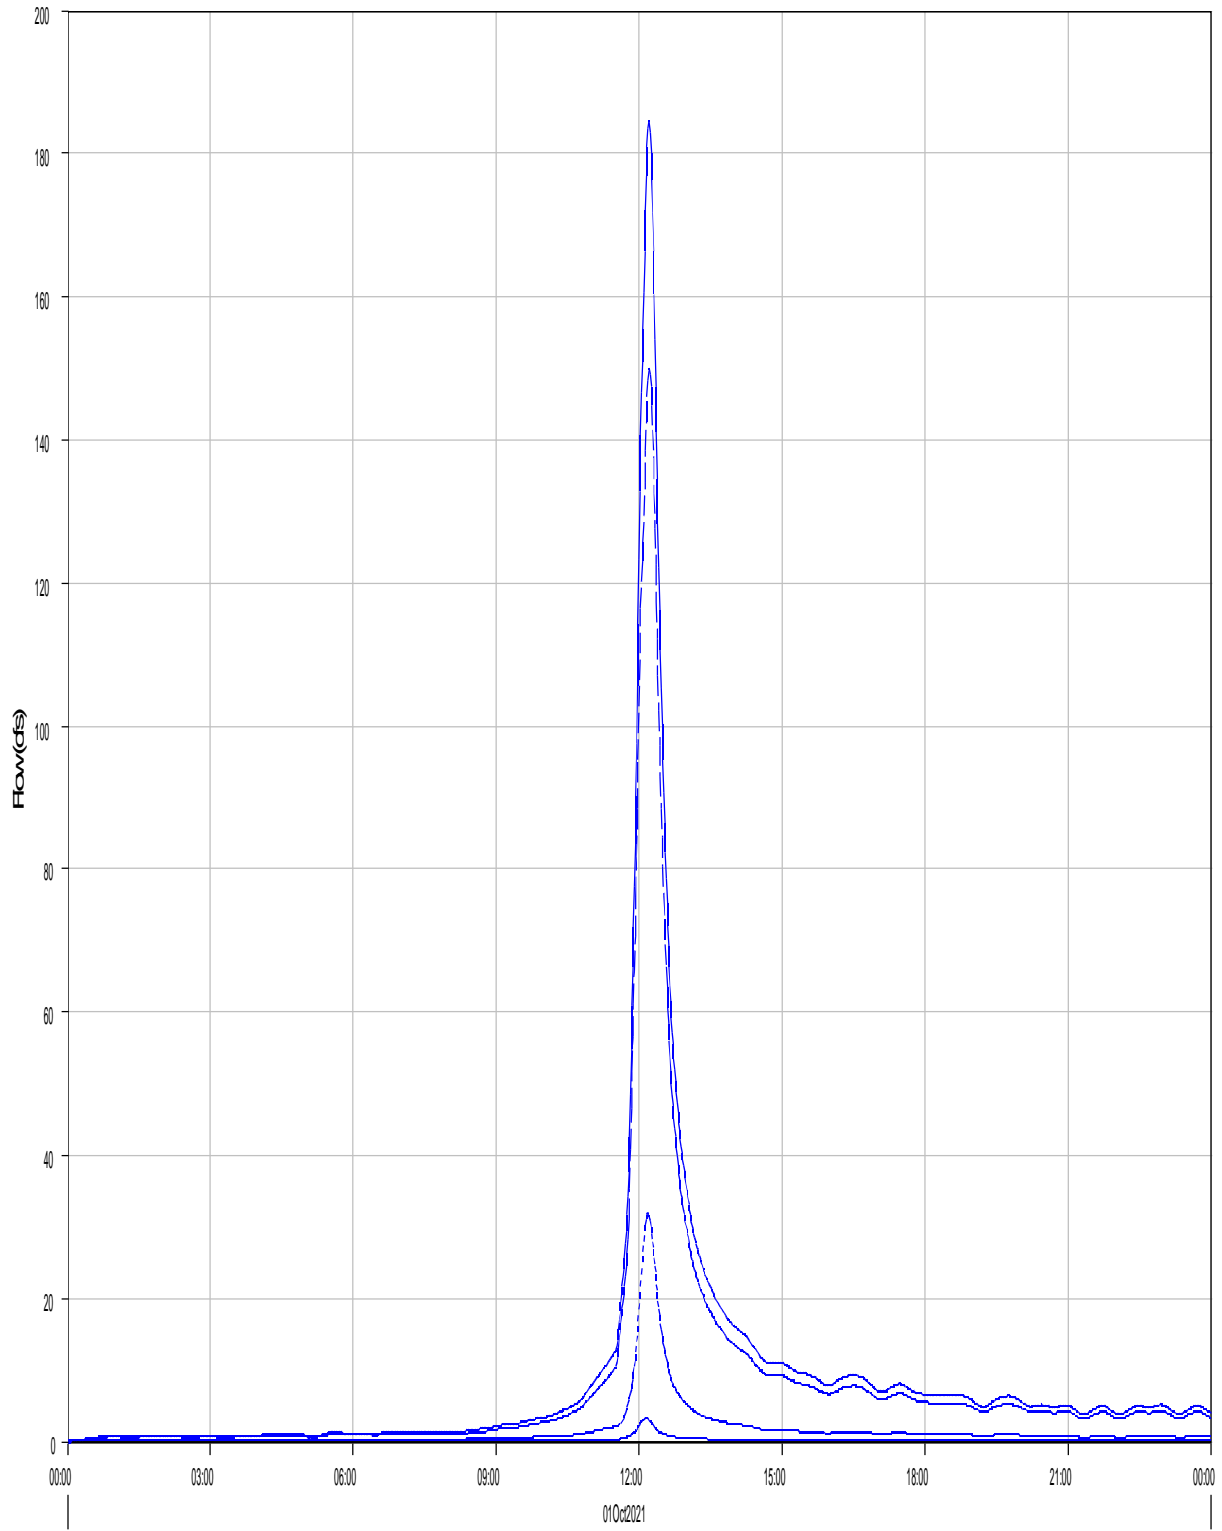

— Run:EV 100-yr Pr. Type II Element:P4 Result:Outflow
- · - Run:EV 100-yr Pr. Type II Element:R-PB3 Result:Outflow

- - - Run:EV 100-yr Pr. Type II Element:R-PB5 Result:Outflow

· · · Run:EV 100-yr Pr. Type II Element:R-PB7-B Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Junction: P4
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 184.6 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:12
Total Outflow : 19.8 (AC-FT)

Reach 'P5 (CULV7)' Results for Run 'EV 100-yr Pr. Type II'

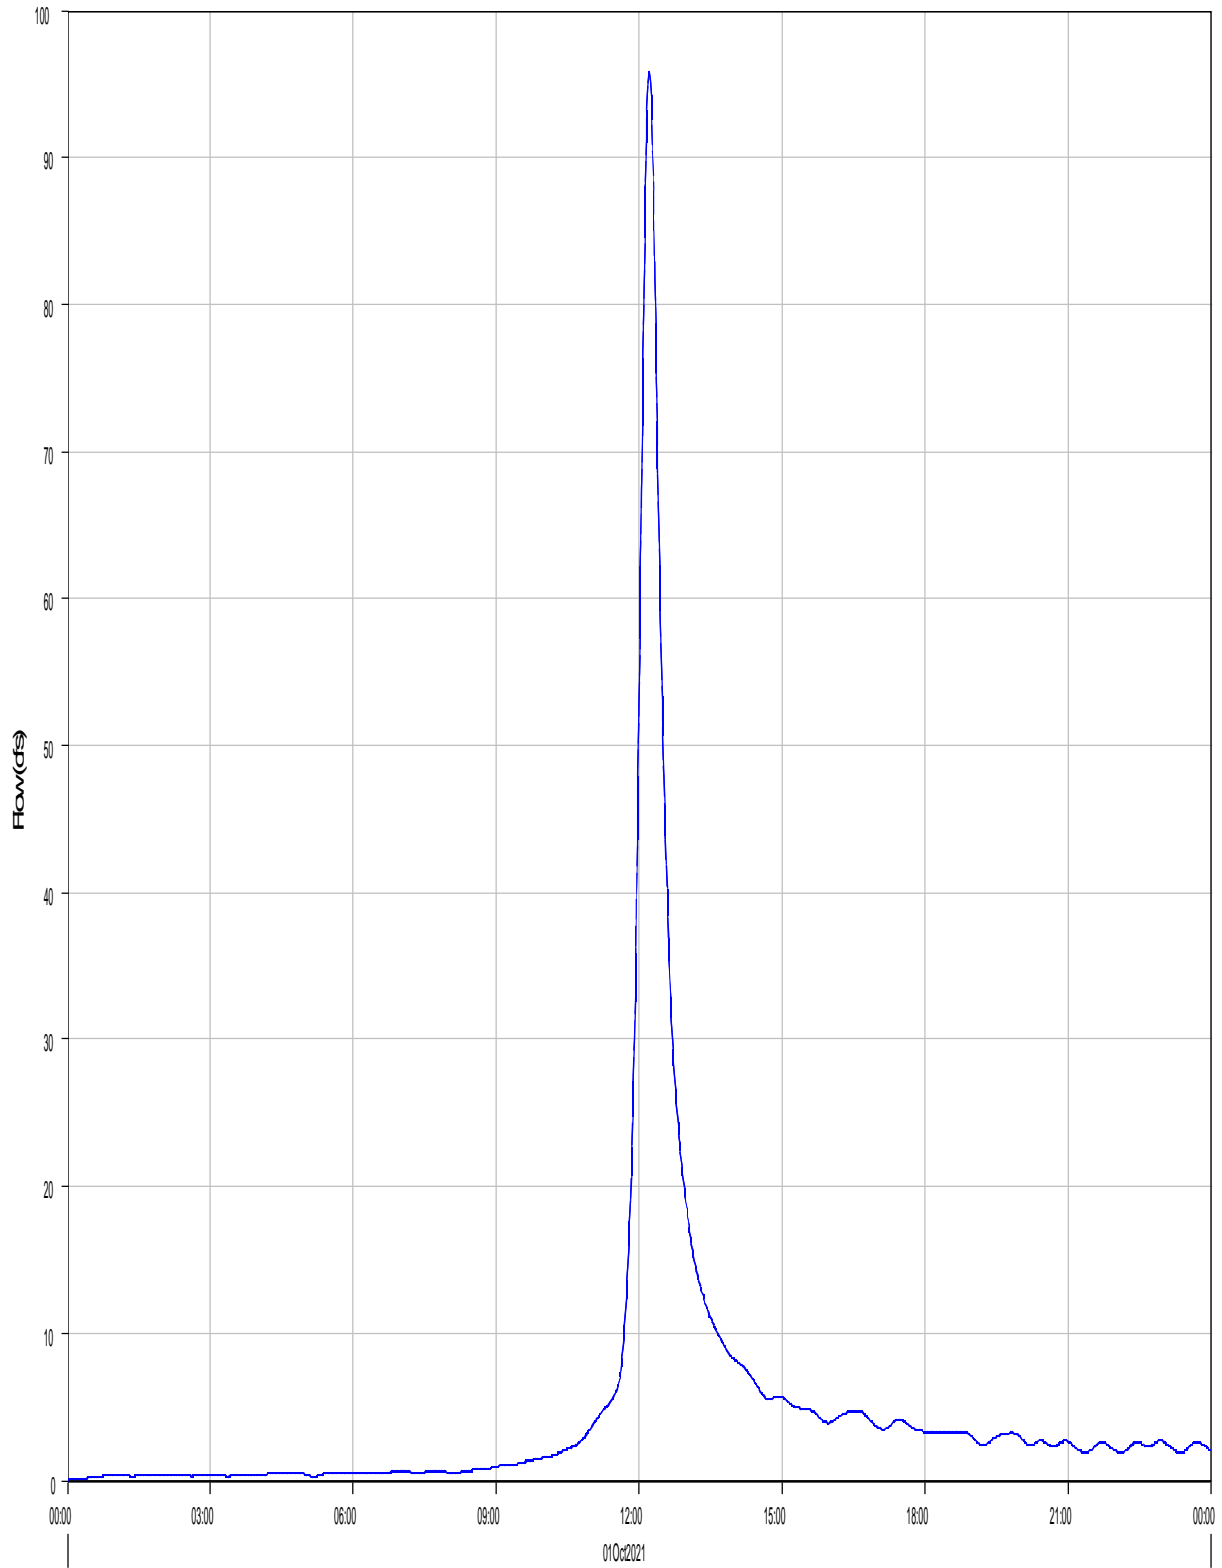

Run:EV 100-yr Pr. Type II Element:P5 (CULV7) Result:Outflow

Run:EV 100-yr Pr. Type II Element:P5 (CULV7) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: P5 (CULV7)


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	95.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	95.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	9.8 (AC-FT)	Total Outflow :	9.8 (AC-FT)

Junction 'P6' Results for Run 'EV 100-yr Pr. Type II'

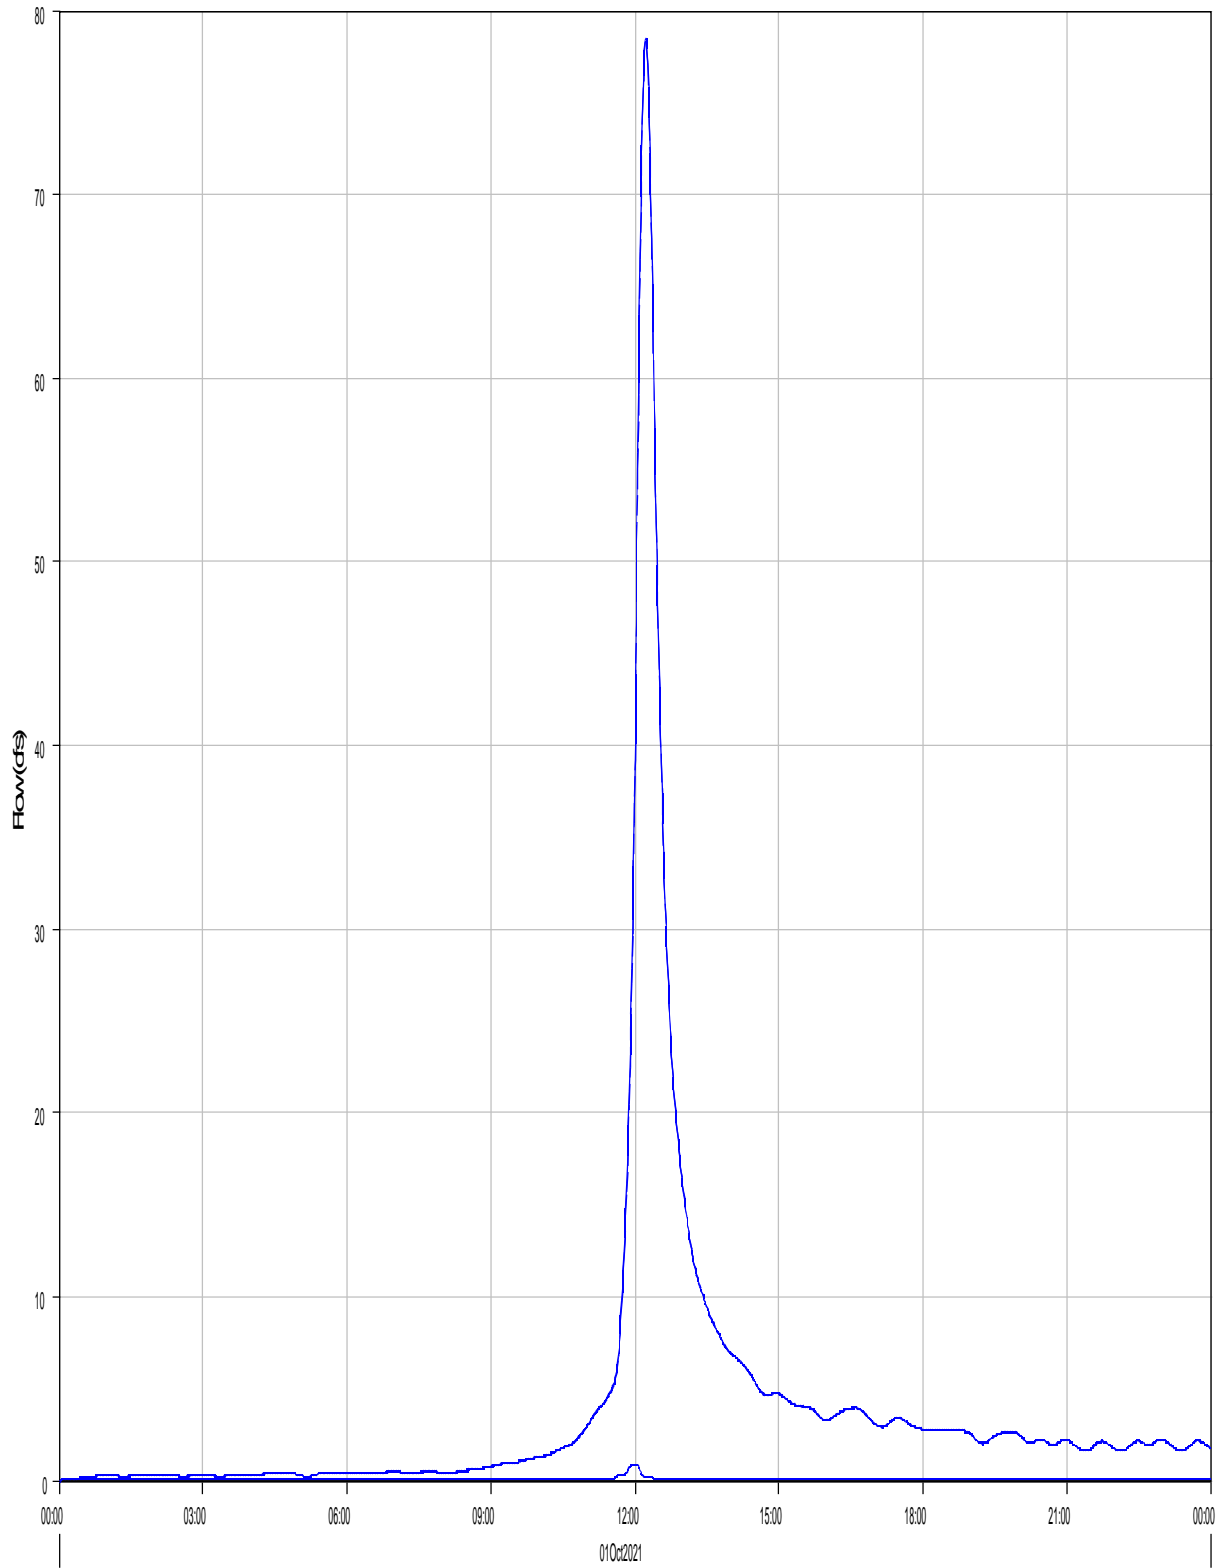

Run:EV 100-yr Pr. Type II Element:P6 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB11 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB12-A Result:Outflow



Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Junction: P6
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 78.5 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:14
Total Outflow : 8.2 (AC-FT)

Reservoir 'P7' Results for Run 'EV 100-yr Pr. Type II'

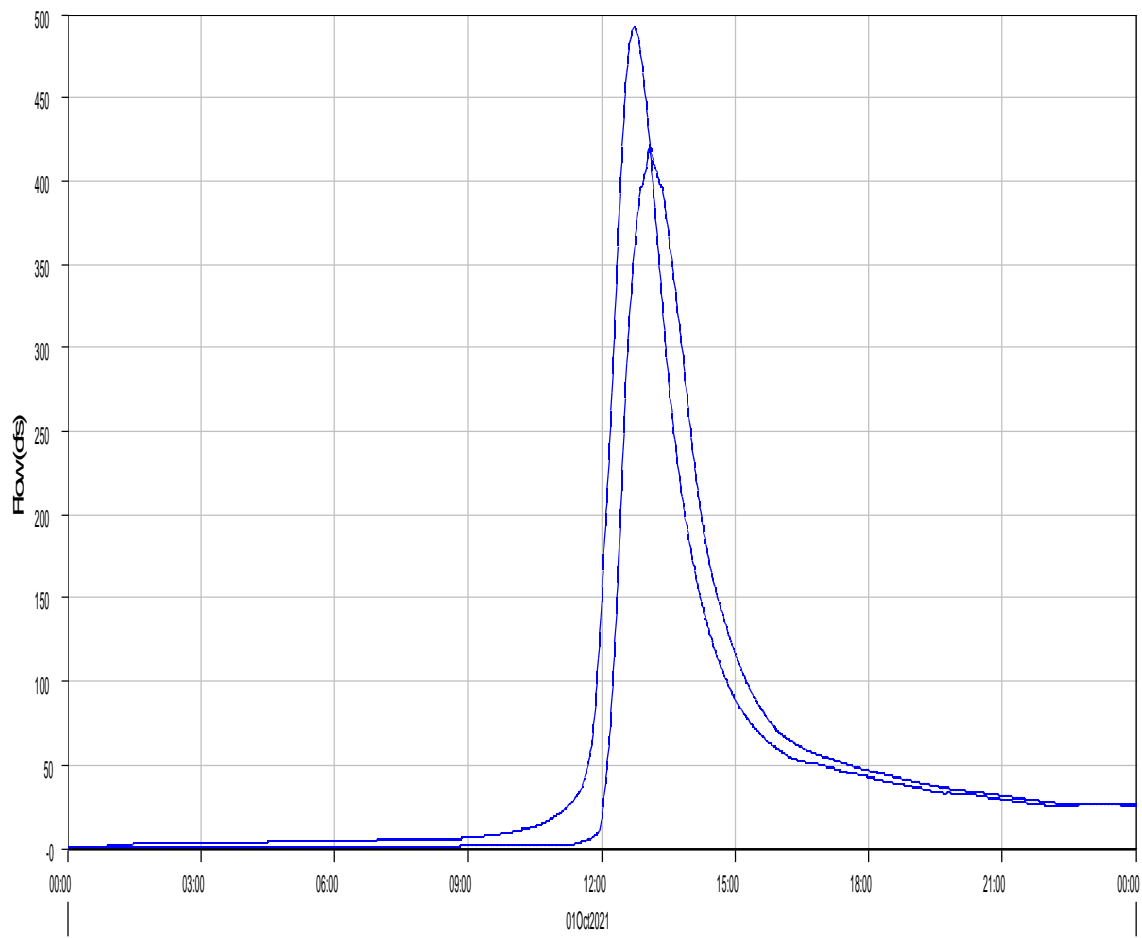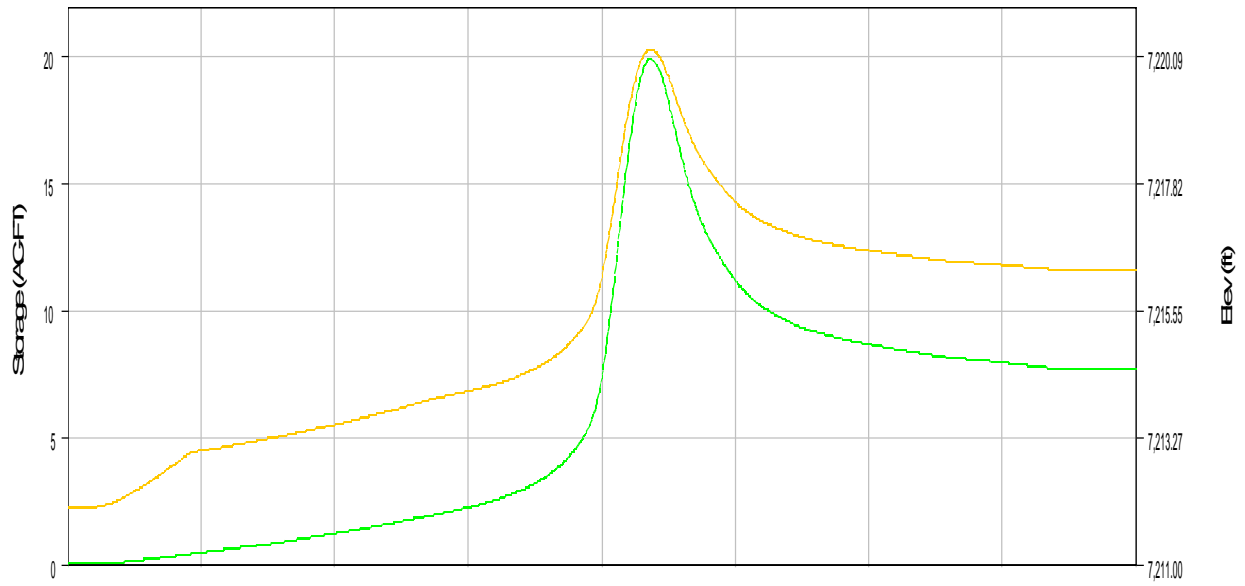

- Run:EV 100-yr Pr. Type II Element:P7 Result:Storage
- Run:EV 100-yr Pr. Type II Element:P7 Result:Pool Elevation
- Run:EV 100-yr Pr. Type II Element:P7 Result:Outflow
- Run:EV 100-yr Pr. Type II Element:P7 Result:Combined Flow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reservoir: P7
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	491.6 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:44
Peak Outflow :	420.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:05
Total Inflow :	104.2 (AC-FT)	Peak Storage :	19.9 (AC-FT)
Total Outflow :	96.5 (AC-FT)	Peak Elevation :	7220.2 (FT)

Junction 'P8' Results for Run 'EV 100-yr Pr. Type II'

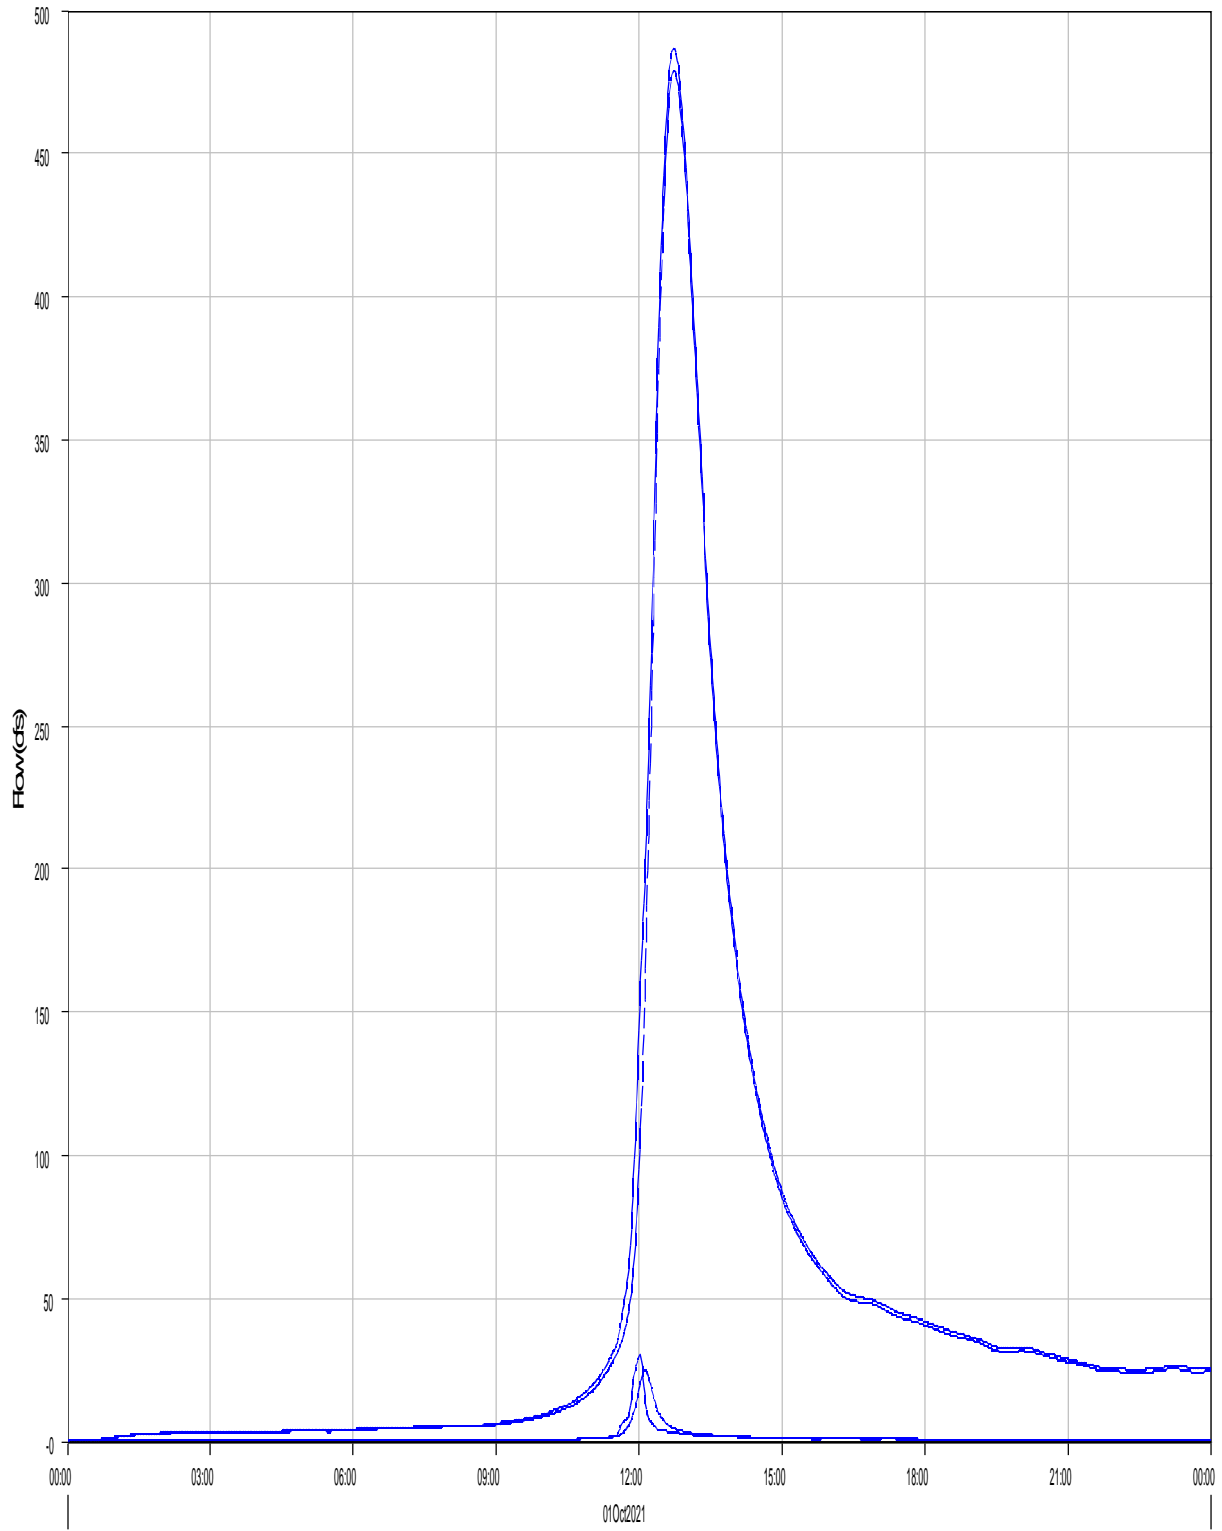

Run:EV 100-yr Pr. Type II Element:P8 Result:Outflow
Run:EV 100-yr Pr. Type II Element:P88 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-OB7 Result:Outflow

Run:EV 100-yr Pr. Type II Element:P88 Result:Outflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Junction: P8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Outflow : 486.7 (CFS) Date/Time of Peak Outflow : 01Oct2021, 12:44
Total Outflow : 102.2 (AC-FT)

Reach 'P9 (CULV6)' Results for Run 'EV 100-yr Pr. Type II'

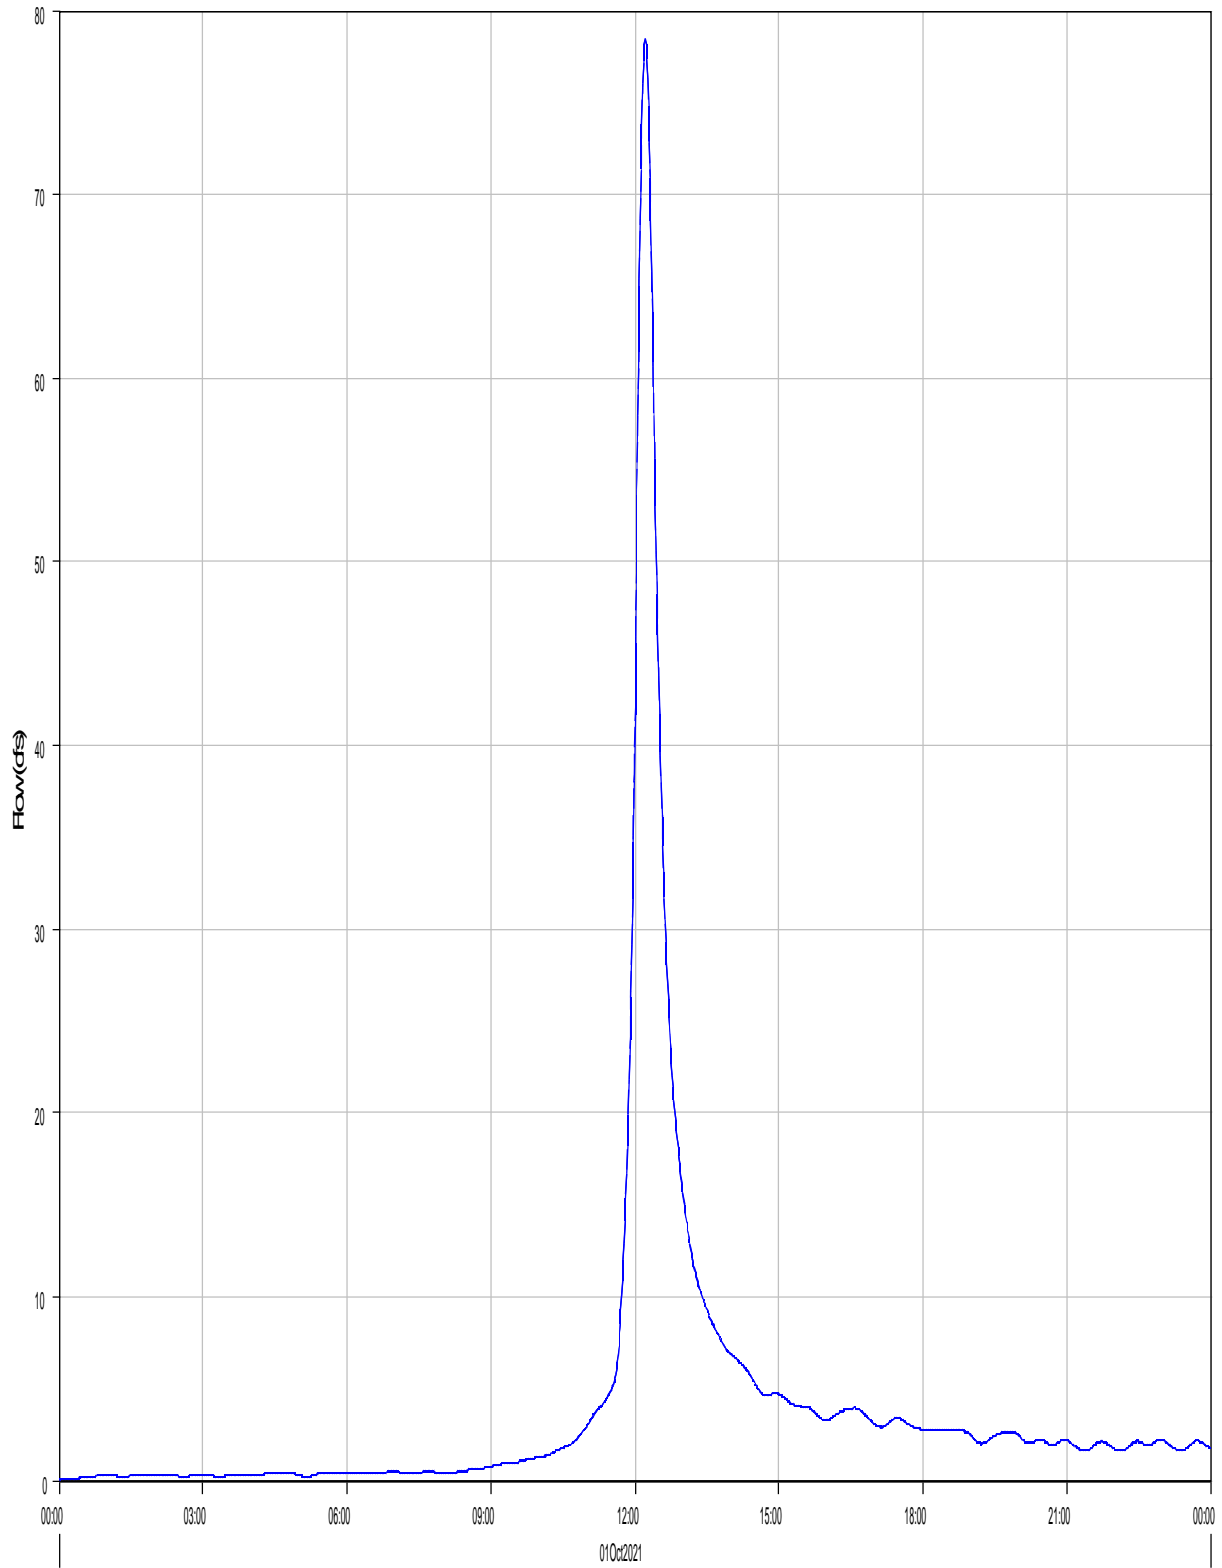

Run:EV 100-yr Pr. Type II Element:P9 (CULV6) Result:Outflow

Run:EV 100-yr Pr. Type II Element:P9 (CULV6) Result:Combined Inflow

Project: Eagleview_Subdivision

Simulation Run: EV 100-yr Pr. Type II Reach: P9 (CULV6)

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed

End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II


Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	78.4 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	78.4 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	8.2 (AC-FT)	Total Outflow :	8.2 (AC-FT)

Reach 'P10 (CULV2)' Results for Run 'EV 100-yr Pr. Type II'

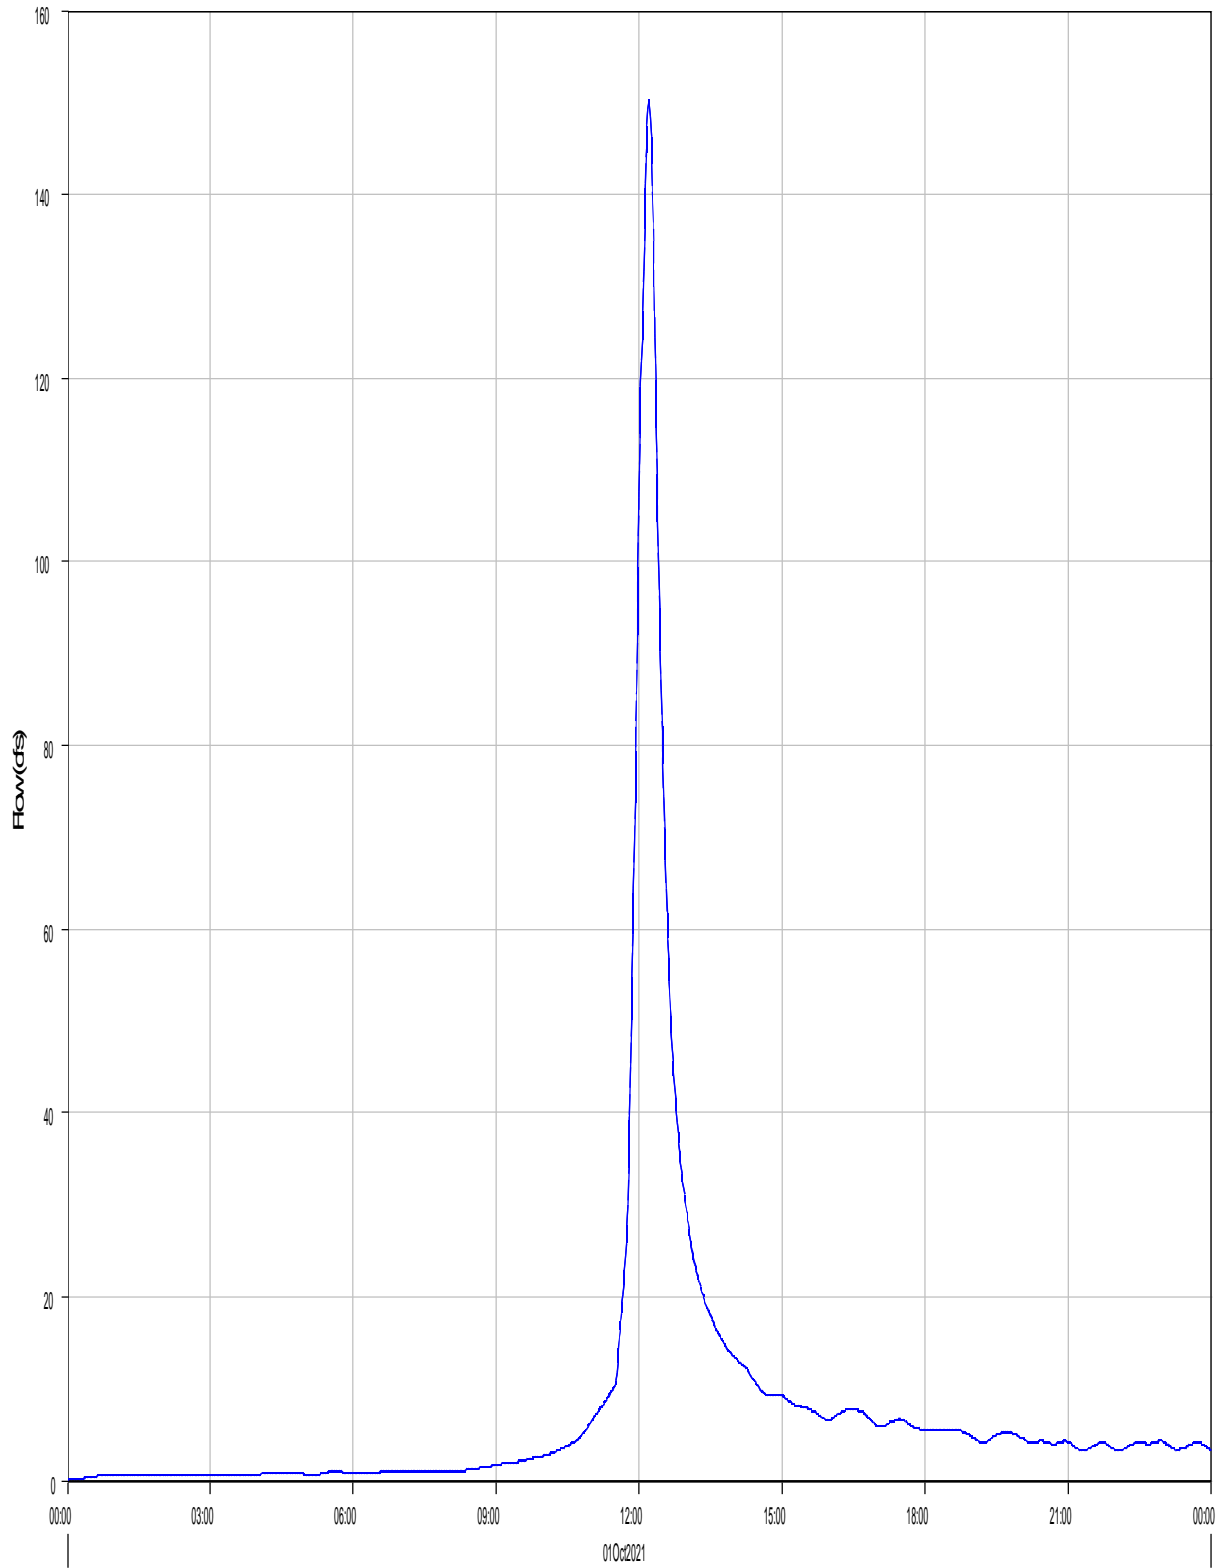

Run:EV 100-yr Pr. Type II Element:P10 (CULV2) Result:Outflow

Run:EV 100-yr Pr. Type II Element:P10 (CULV2) Result:Combined Inflow

Project: Eagleview_Subdivision

Simulation Run: EV 100-yr Pr. Type II Reach: P10 (CULV2)

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed

End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II


Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	150.2 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:12
Peak Outflow :	150.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:12
Total Inflow :	16.4 (AC-FT)	Total Outflow :	16.4 (AC-FT)

Reach 'P11 (CULV3)' Results for Run 'EV 100-yr Pr. Type II'

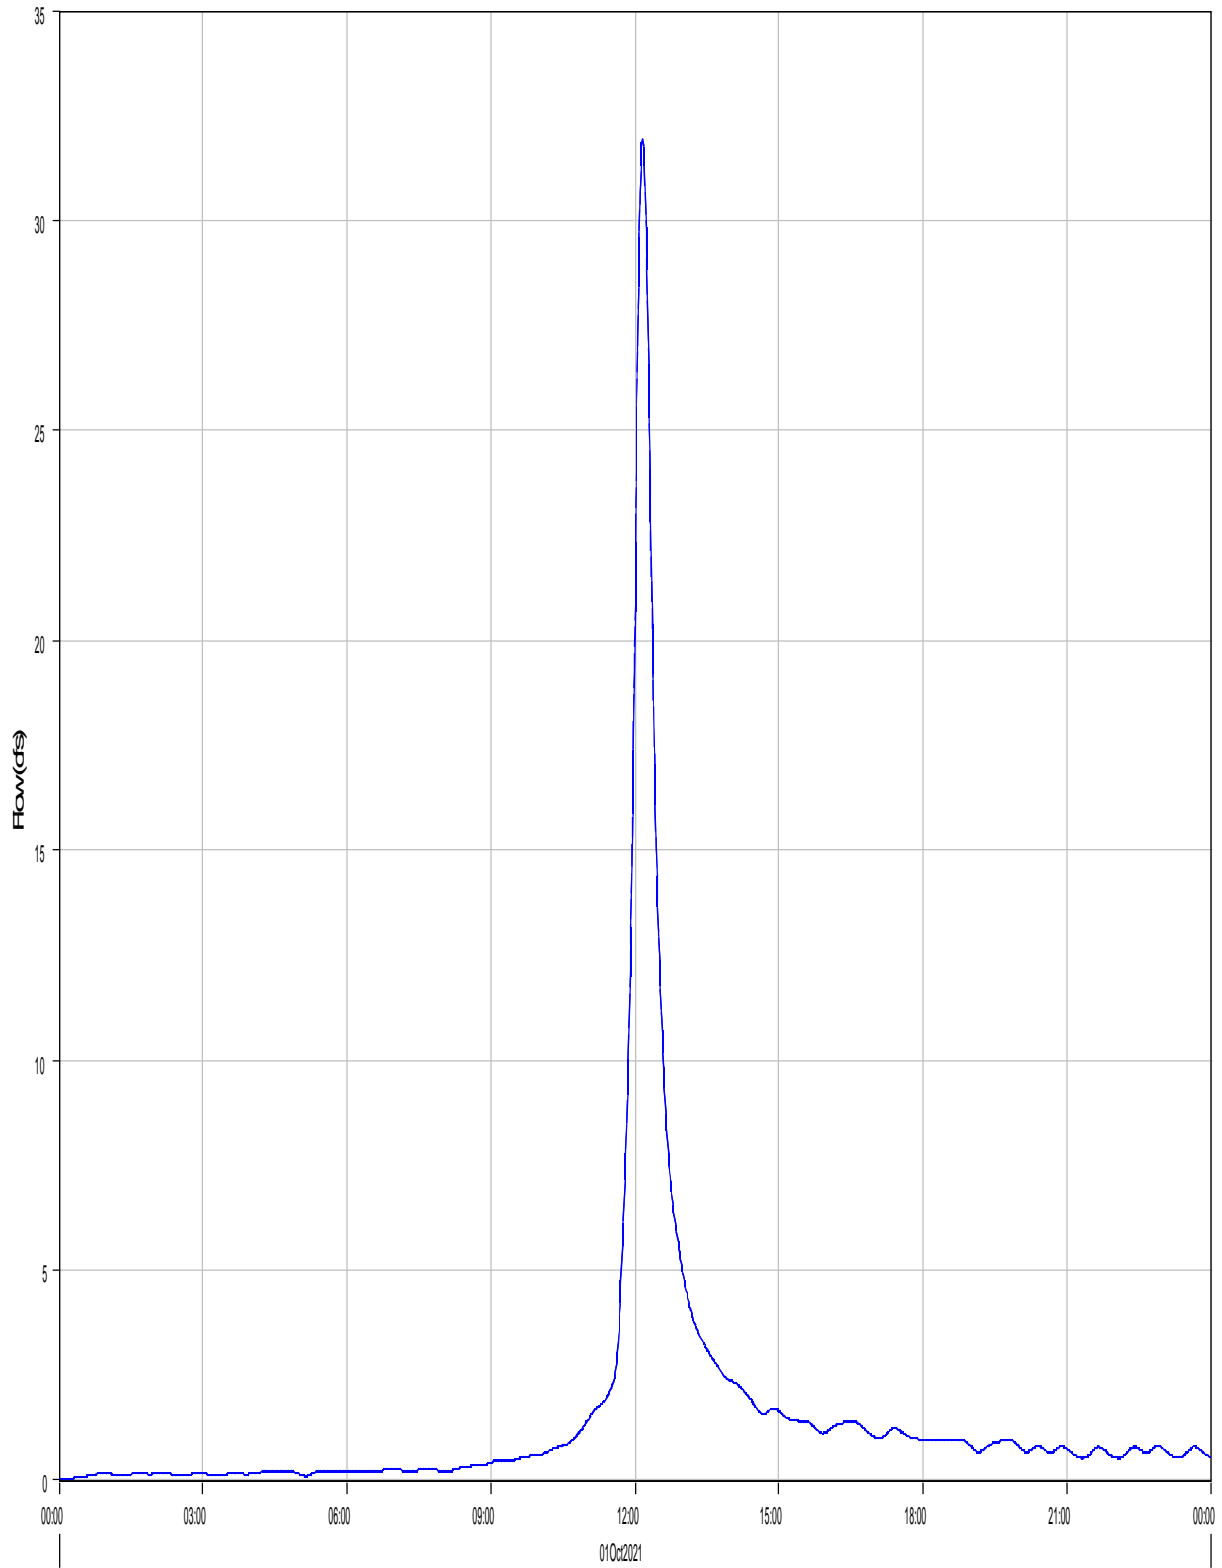

— Run:EV 100-yr Pr. Type II Element:P11 (CULV3) Result:Outflow

- - - Run:EV 100-yr Pr. Type II Element:P11 (CULV3) Result:Combined Inflow

Project: Eagleview_Subdivision

Simulation Run: EV 100-yr Pr. Type II Reach: P11 (CULV3)

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed

End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II


Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	31.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:10
Peak Outflow :	31.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:10
Total Inflow :	3.1 (AC-FT)	Total Outflow :	3.1 (AC-FT)

Reach 'P12 (CULV8)' Results for Run 'EV 100-yr Pr. Type II'

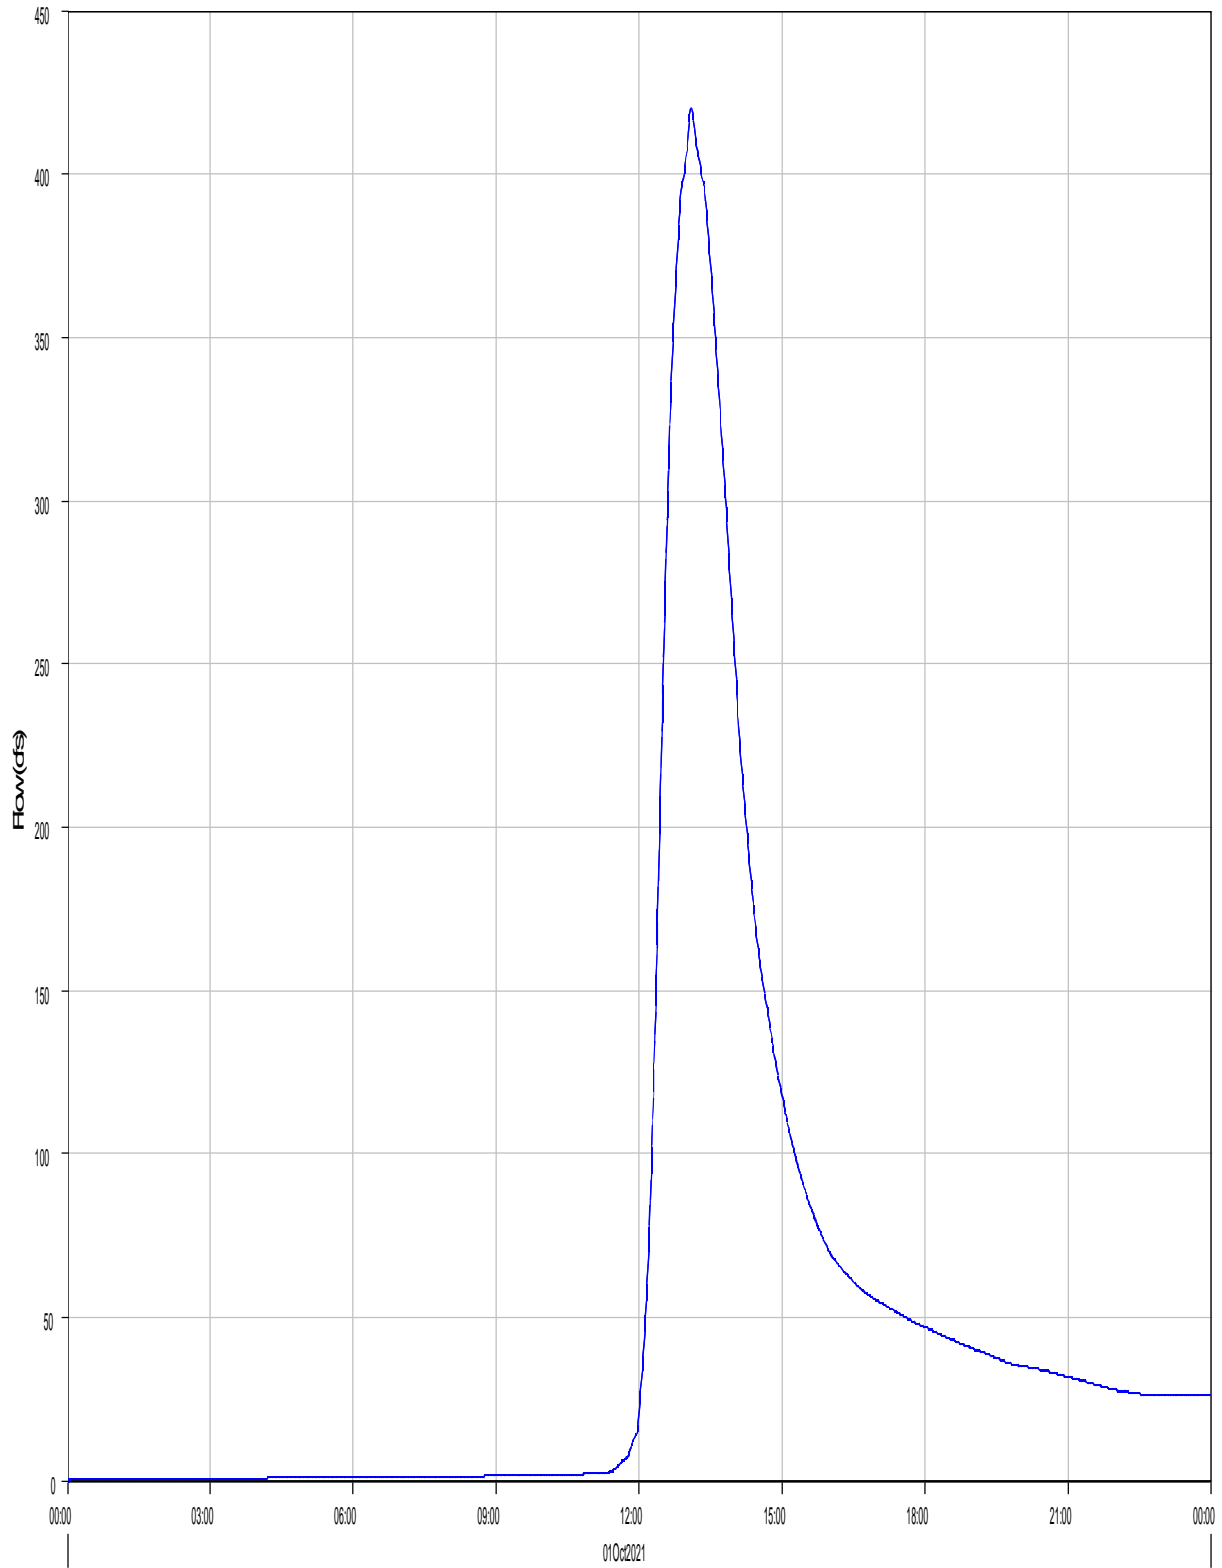

Run:EV 100-yr Pr. Type II Element:P12 (CULV8) Result:Outflow

Run:EV 100-yr Pr. Type II Element:P12 (CULV8) Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: P12 (CULV8)



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	420.4 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 13:06
Peak Outflow :	420.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:06
Total Inflow :	96.8 (AC-FT)	Total Outflow :	96.8 (AC-FT)

Subbasin "PB1" Results for Run "EV 100-yr Pr. Type II"

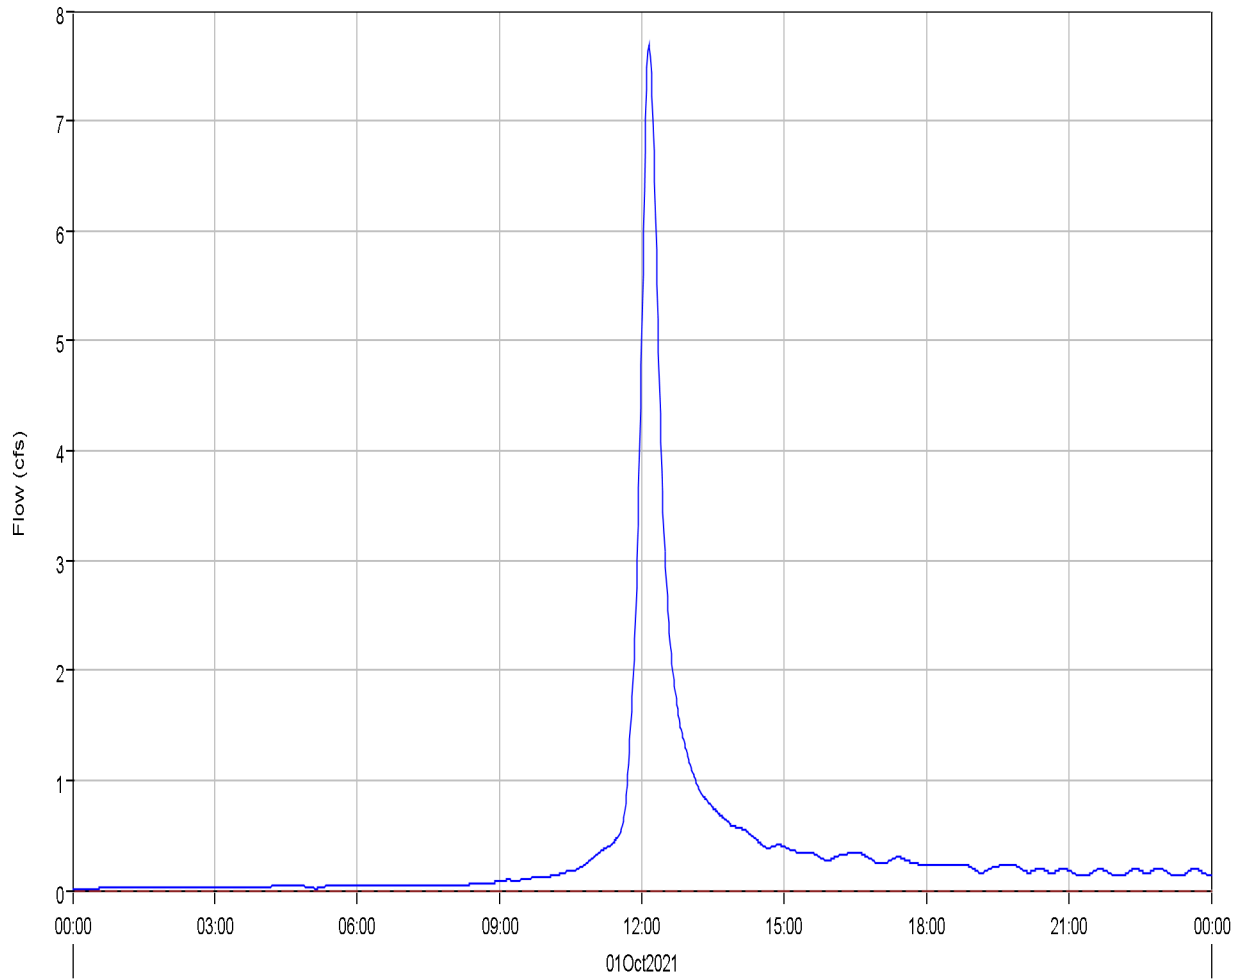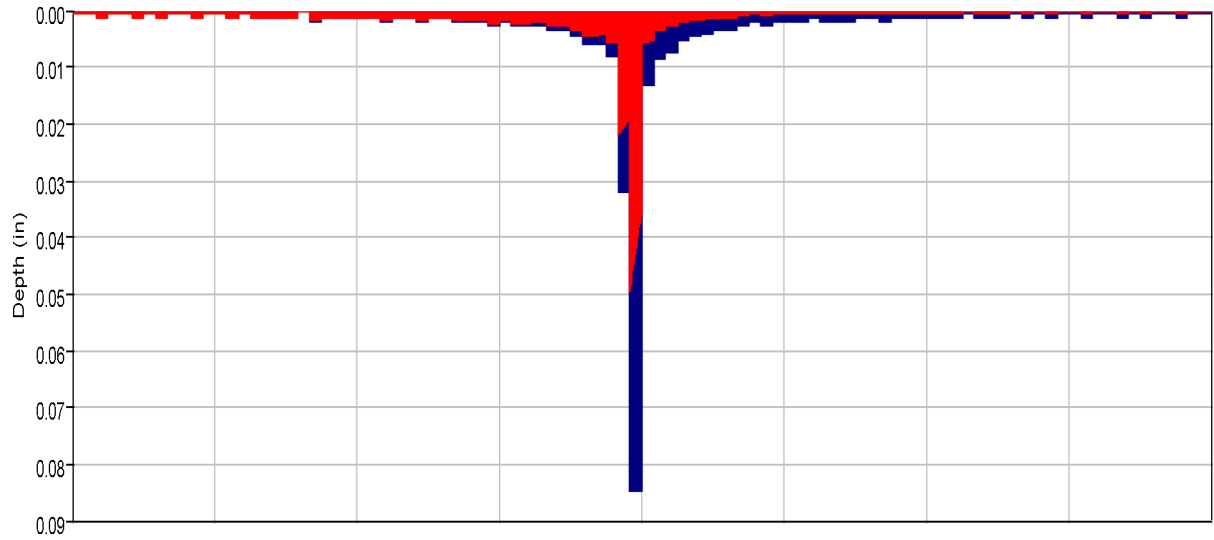

Run:EV 100-yr Pr. Type II Element:PB1 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB1 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB1 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB1 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	7.7 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:09
Total Precipitation :	1.6 (AC-FT)	Total Direct Runoff :	0.7 (AC-FT)
Total Loss :	0.9 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.7 (AC-FT)	Discharge :	0.7 (AC-FT)

Subbasin "PB2" Results for Run "EV 100-yr Pr. Type II"

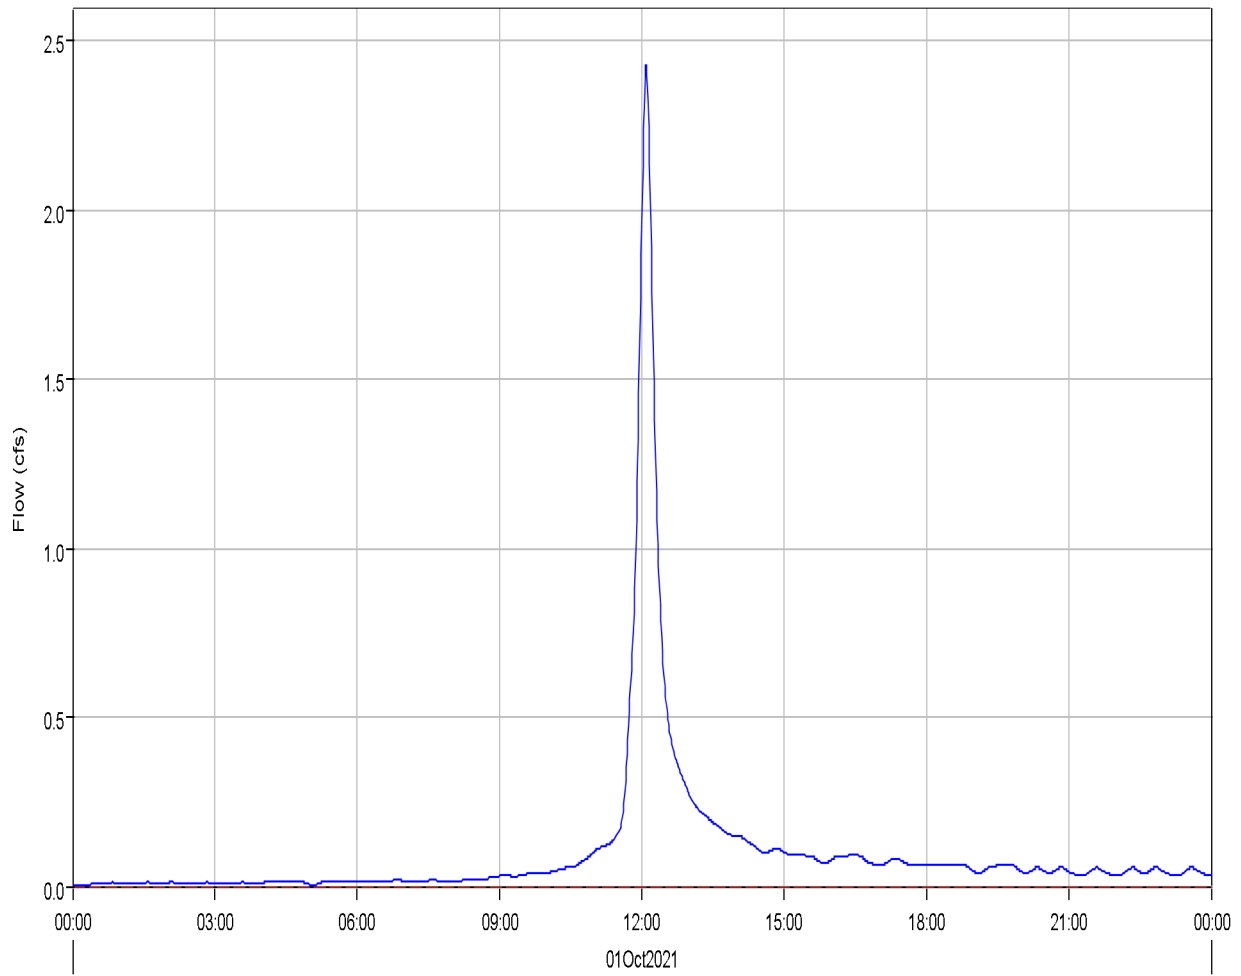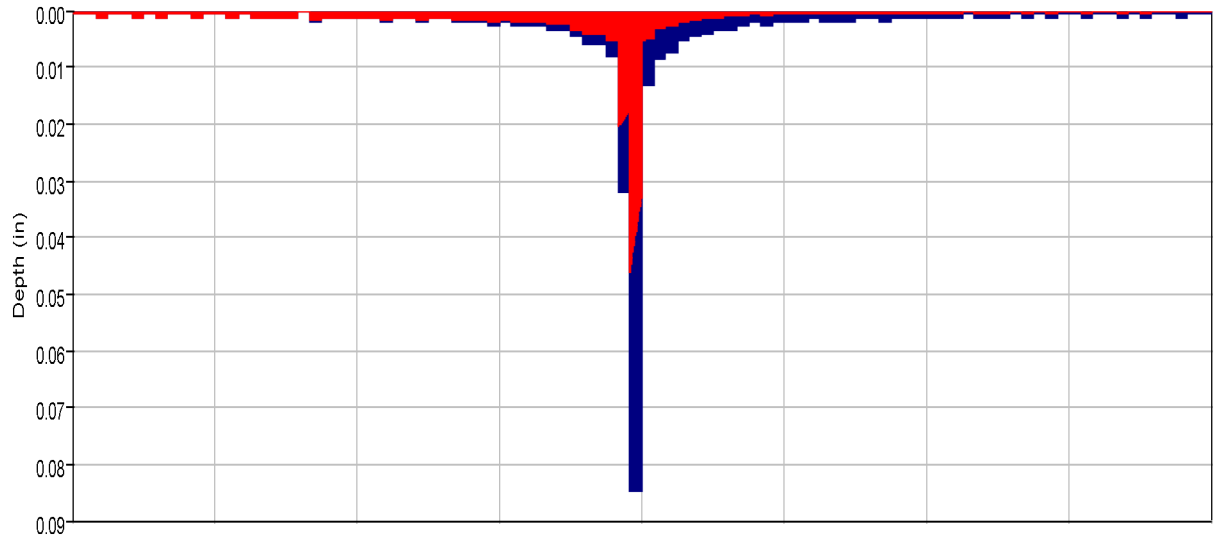

Run:EV 100-yr Pr. Type II Element:PB2 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB2 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB2 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB2 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	2.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:06
Total Precipitation :	0.4 (AC-FT)	Total Direct Runoff :	0.2 (AC-FT)
Total Loss :	0.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.2 (AC-FT)	Discharge :	0.2 (AC-FT)

Subbasin "PB3" Results for Run "EV 100-yr Pr. Type II"

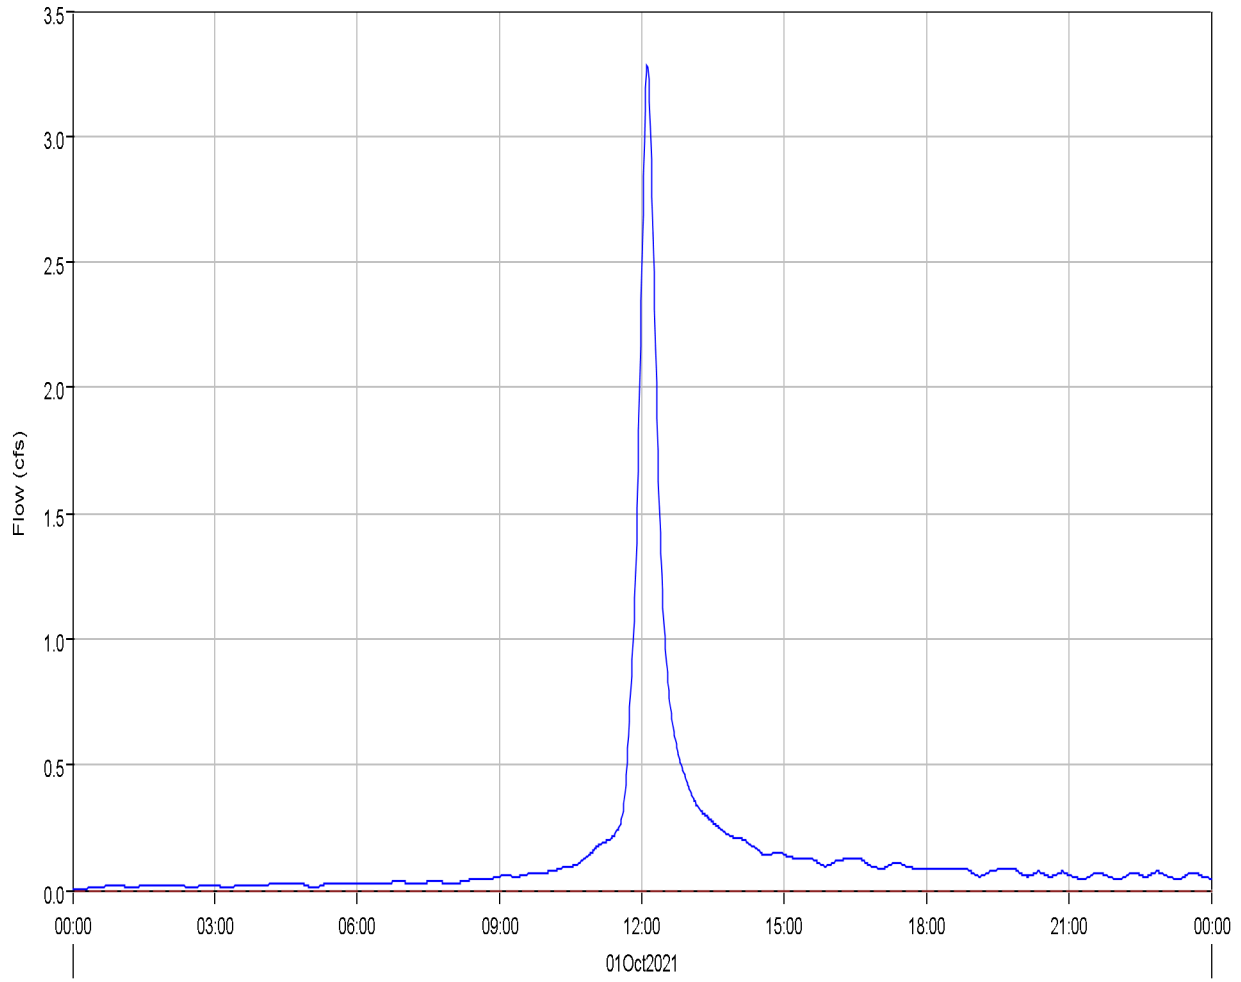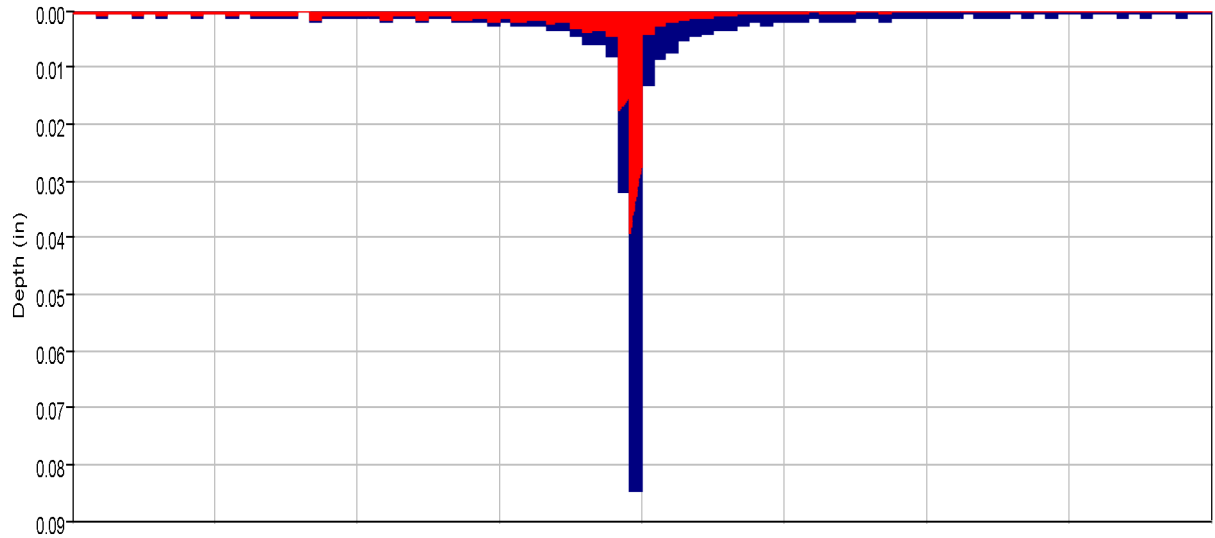

Run:EV 100-yr Pr. Type II Element:PB3 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB3 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB3 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB3 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	3.3 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:07
Total Precipitation :	0.5 (AC-FT)	Total Direct Runoff :	0.3 (AC-FT)
Total Loss :	0.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.3 (AC-FT)	Discharge :	0.3 (AC-FT)

Subbasin "PB4" Results for Run "EV 100-yr Pr. Type II"

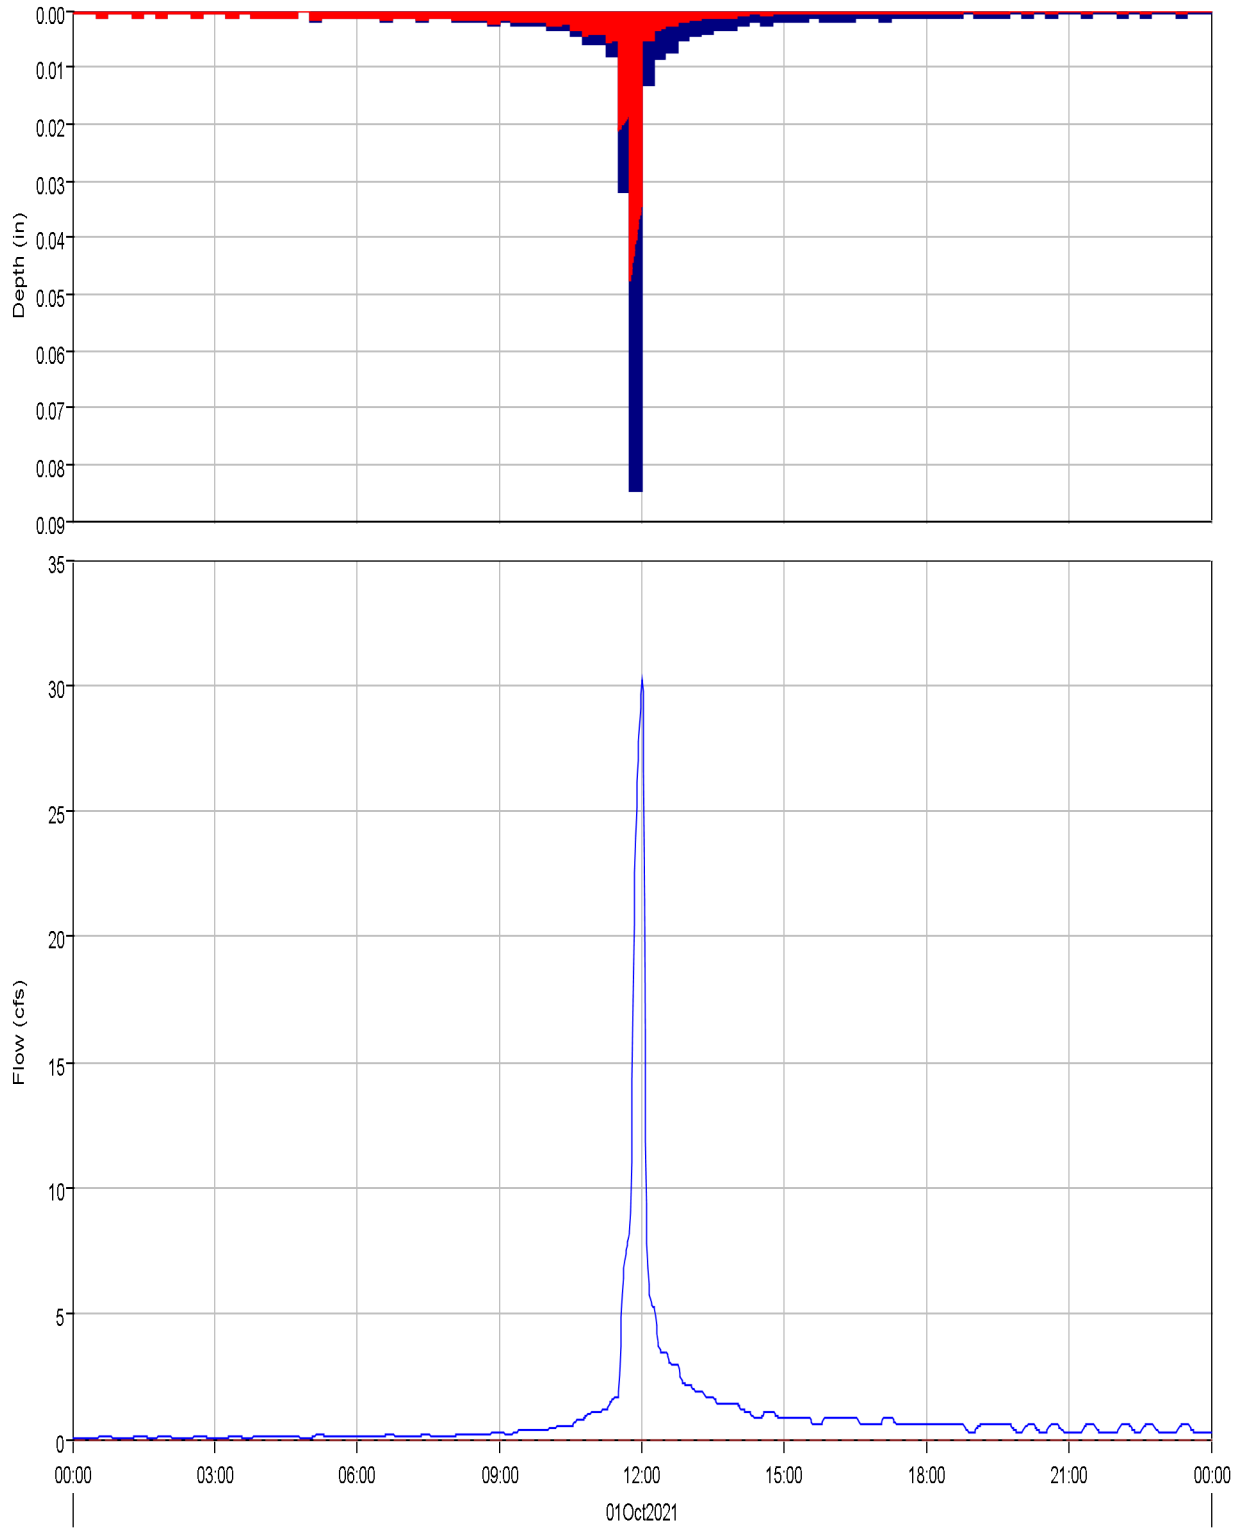

Run:EV 100-yr Pr. Type II Element:PB4 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB4 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB4 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB4 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB4


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	30.2 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	4.0 (AC-FT)	Total Direct Runoff :	1.9 (AC-FT)
Total Loss :	2.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.9 (AC-FT)	Discharge :	1.9 (AC-FT)

Subbasin "PB5" Results for Run "EV 100-yr Pr. Type II"

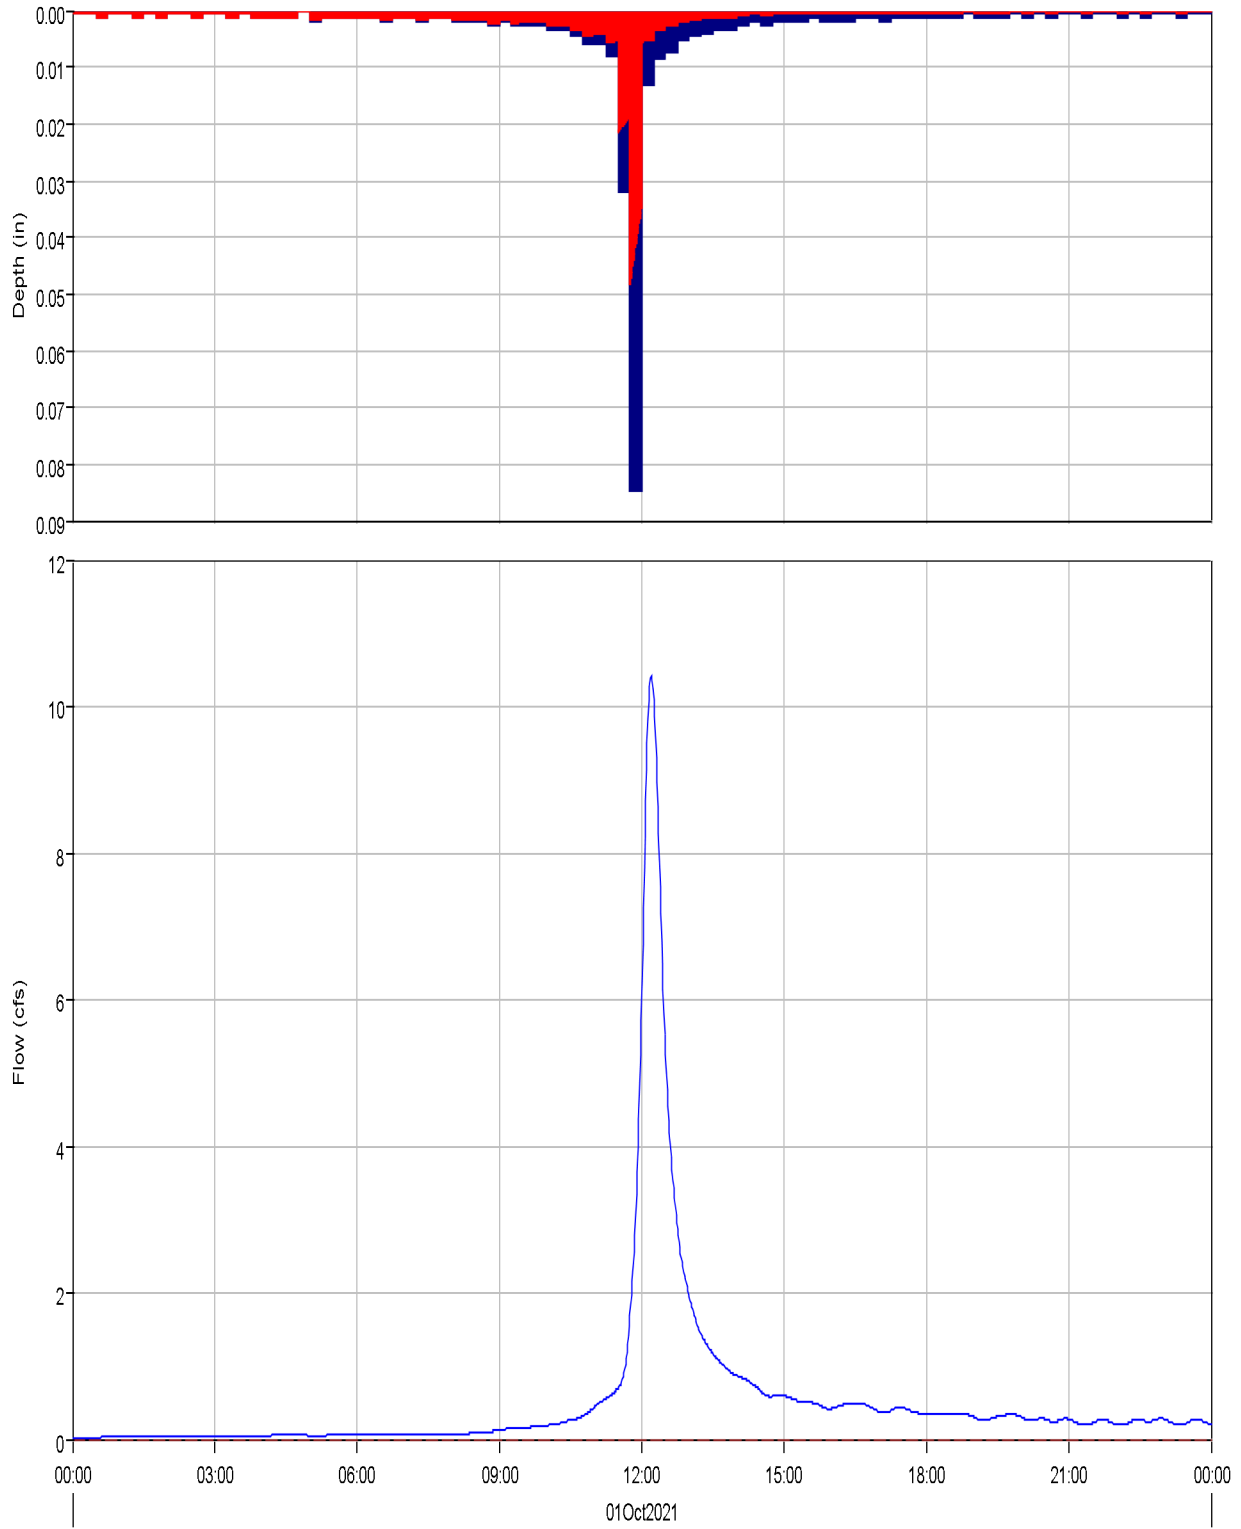

Run:EV 100-yr Pr. Type II Element:PB5 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB5 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB5 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB5 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB5



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	10.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:12
Total Precipitation :	2.4 (AC-FT)	Total Direct Runoff :	1.1 (AC-FT)
Total Loss :	1.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.1 (AC-FT)	Discharge :	1.1 (AC-FT)

Subbasin "PB6" Results for Run "EV 100-yr Pr. Type II"

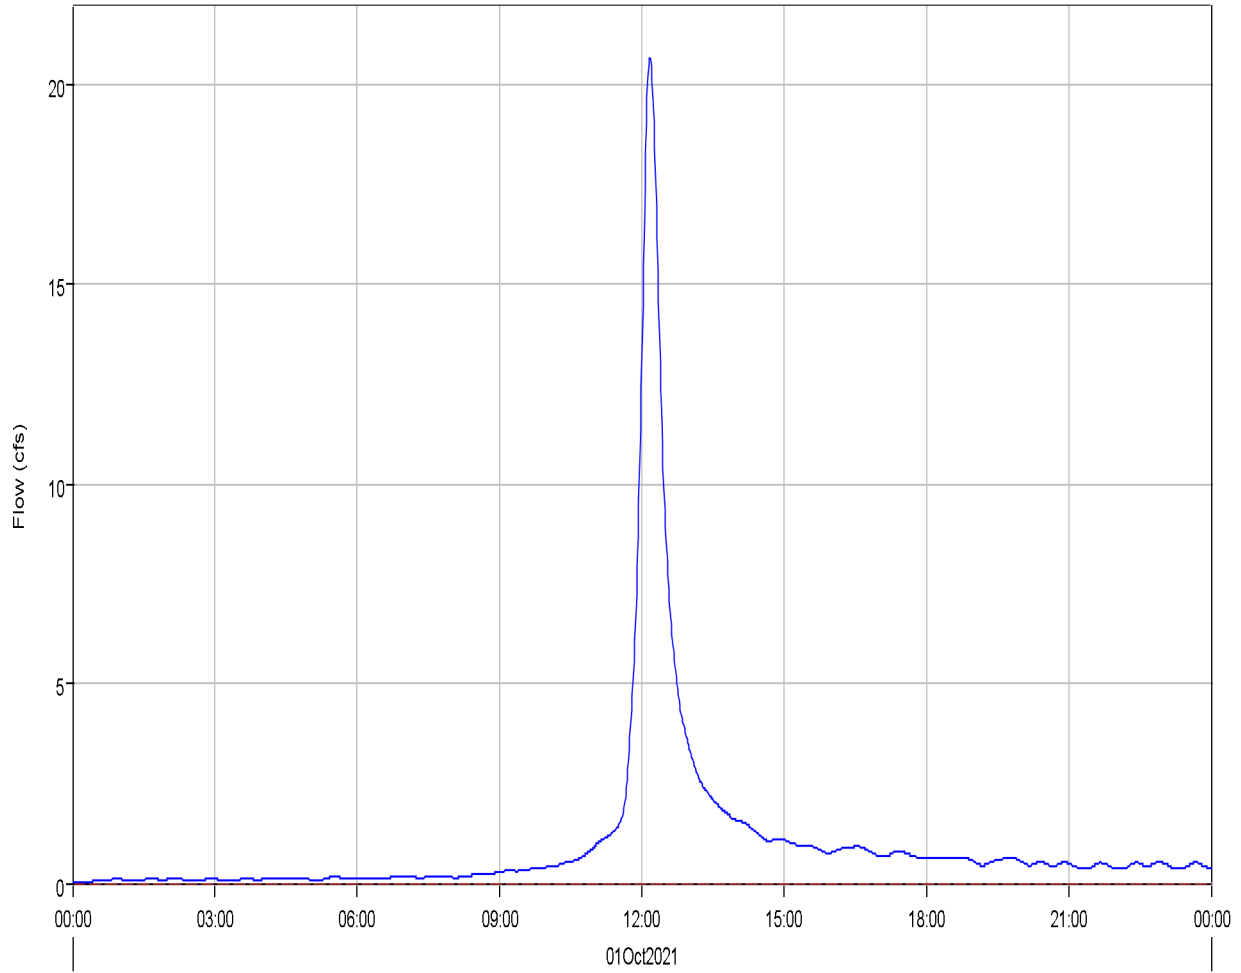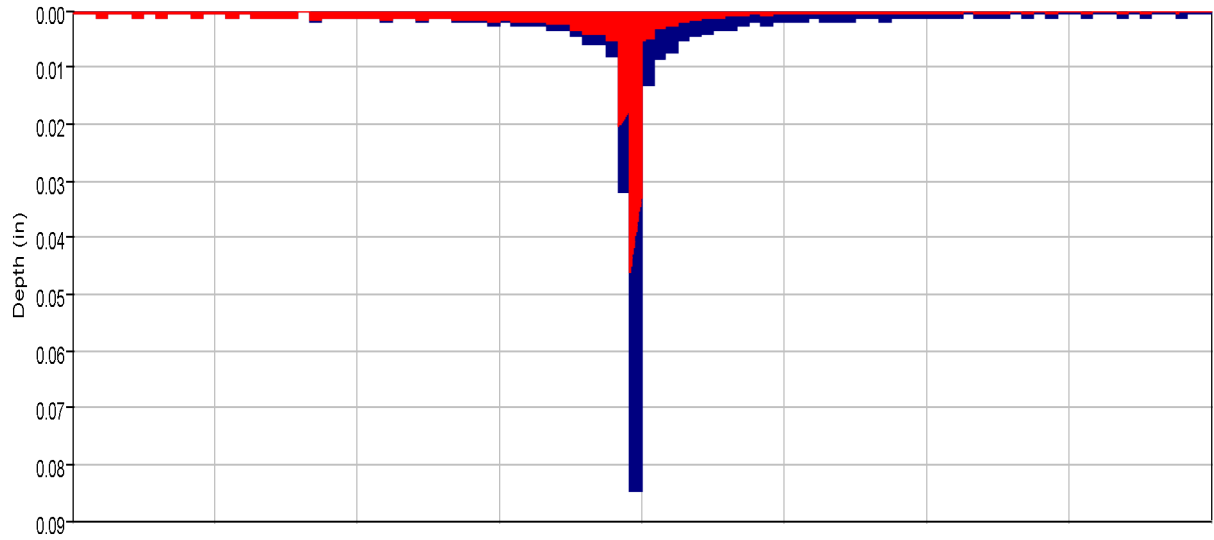

Run:EV 100-yr Pr. Type II Element:PB6 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB6 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB6 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB6 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB6


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	20.7 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	4.3 (AC-FT)	Total Direct Runoff :	2.0 (AC-FT)
Total Loss :	2.2 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.1 (AC-FT)	Discharge :	2.0 (AC-FT)

Subbasin "PB7" Results for Run "EV 100-yr Pr. Type II"

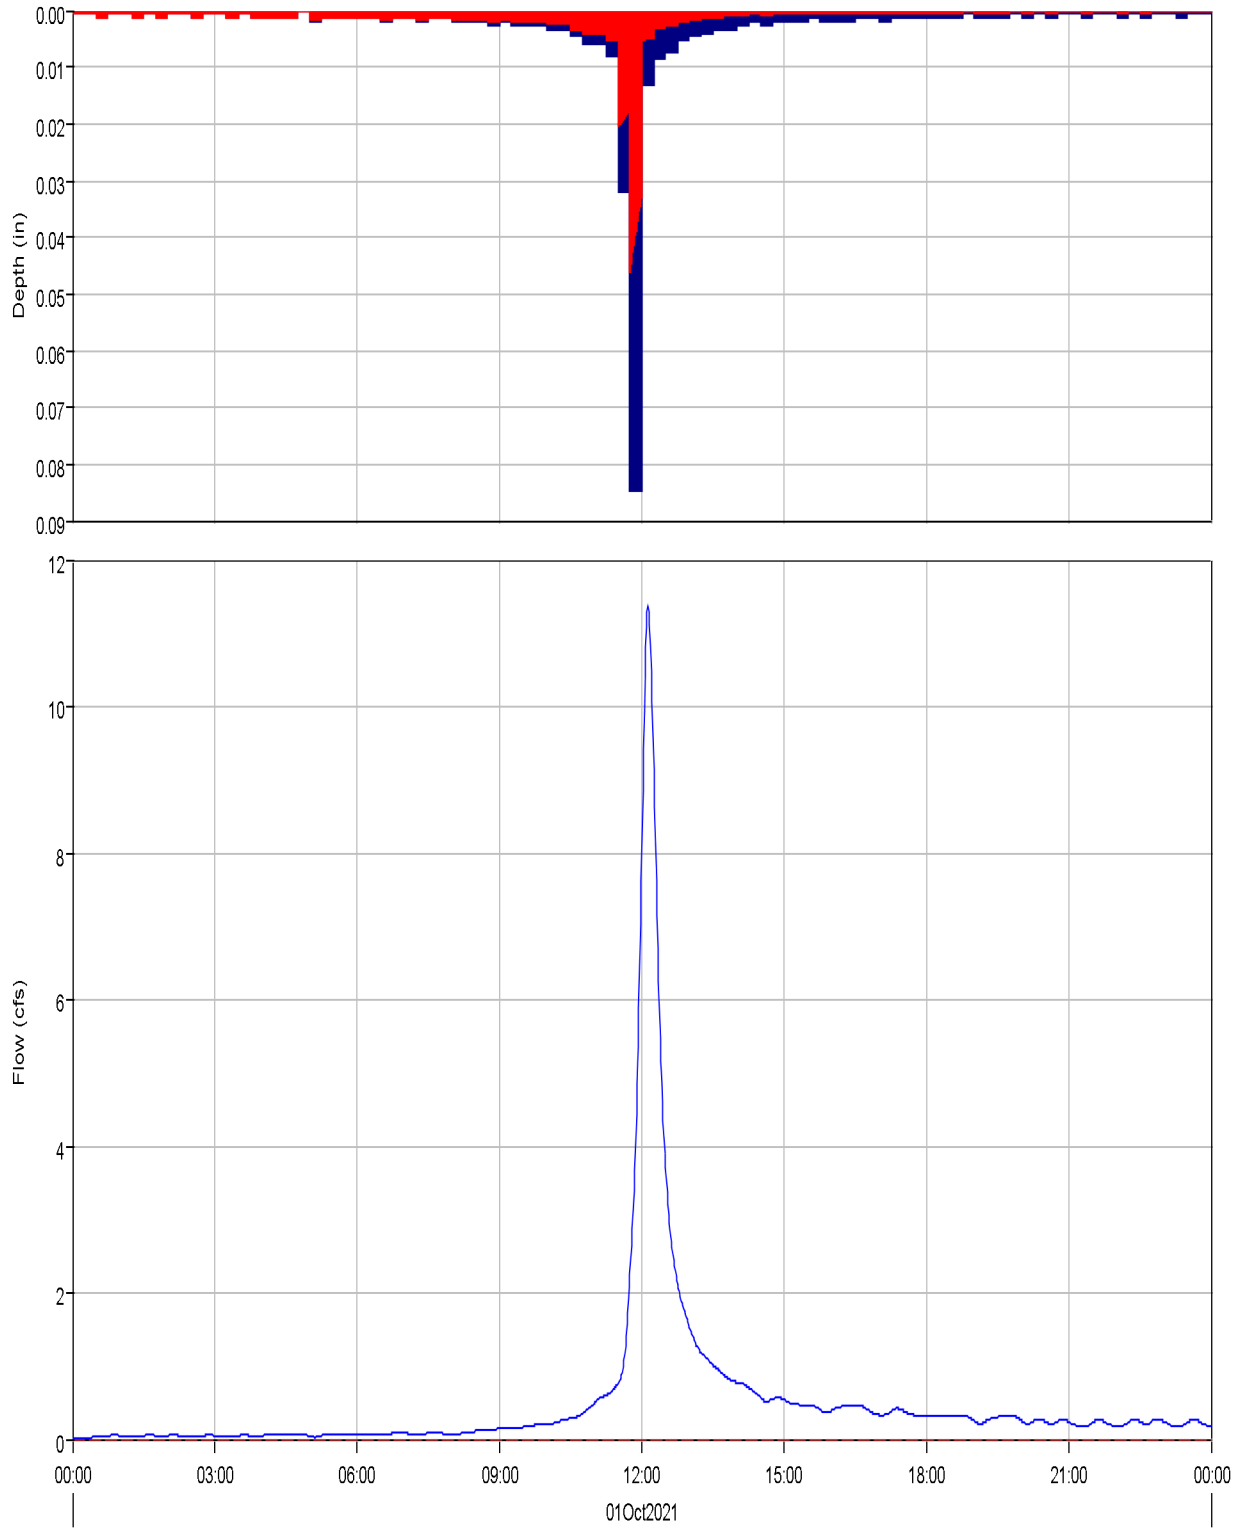

Run:EV 100-yr Pr. Type II Element:PB7 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB7 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB7 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB7 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB7


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	11.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:08
Total Precipitation :	2.1 (AC-FT)	Total Direct Runoff :	1.0 (AC-FT)
Total Loss :	1.1 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.0 (AC-FT)	Discharge :	1.0 (AC-FT)

Subbasin "PB8" Results for Run "EV 100-yr Pr. Type II"

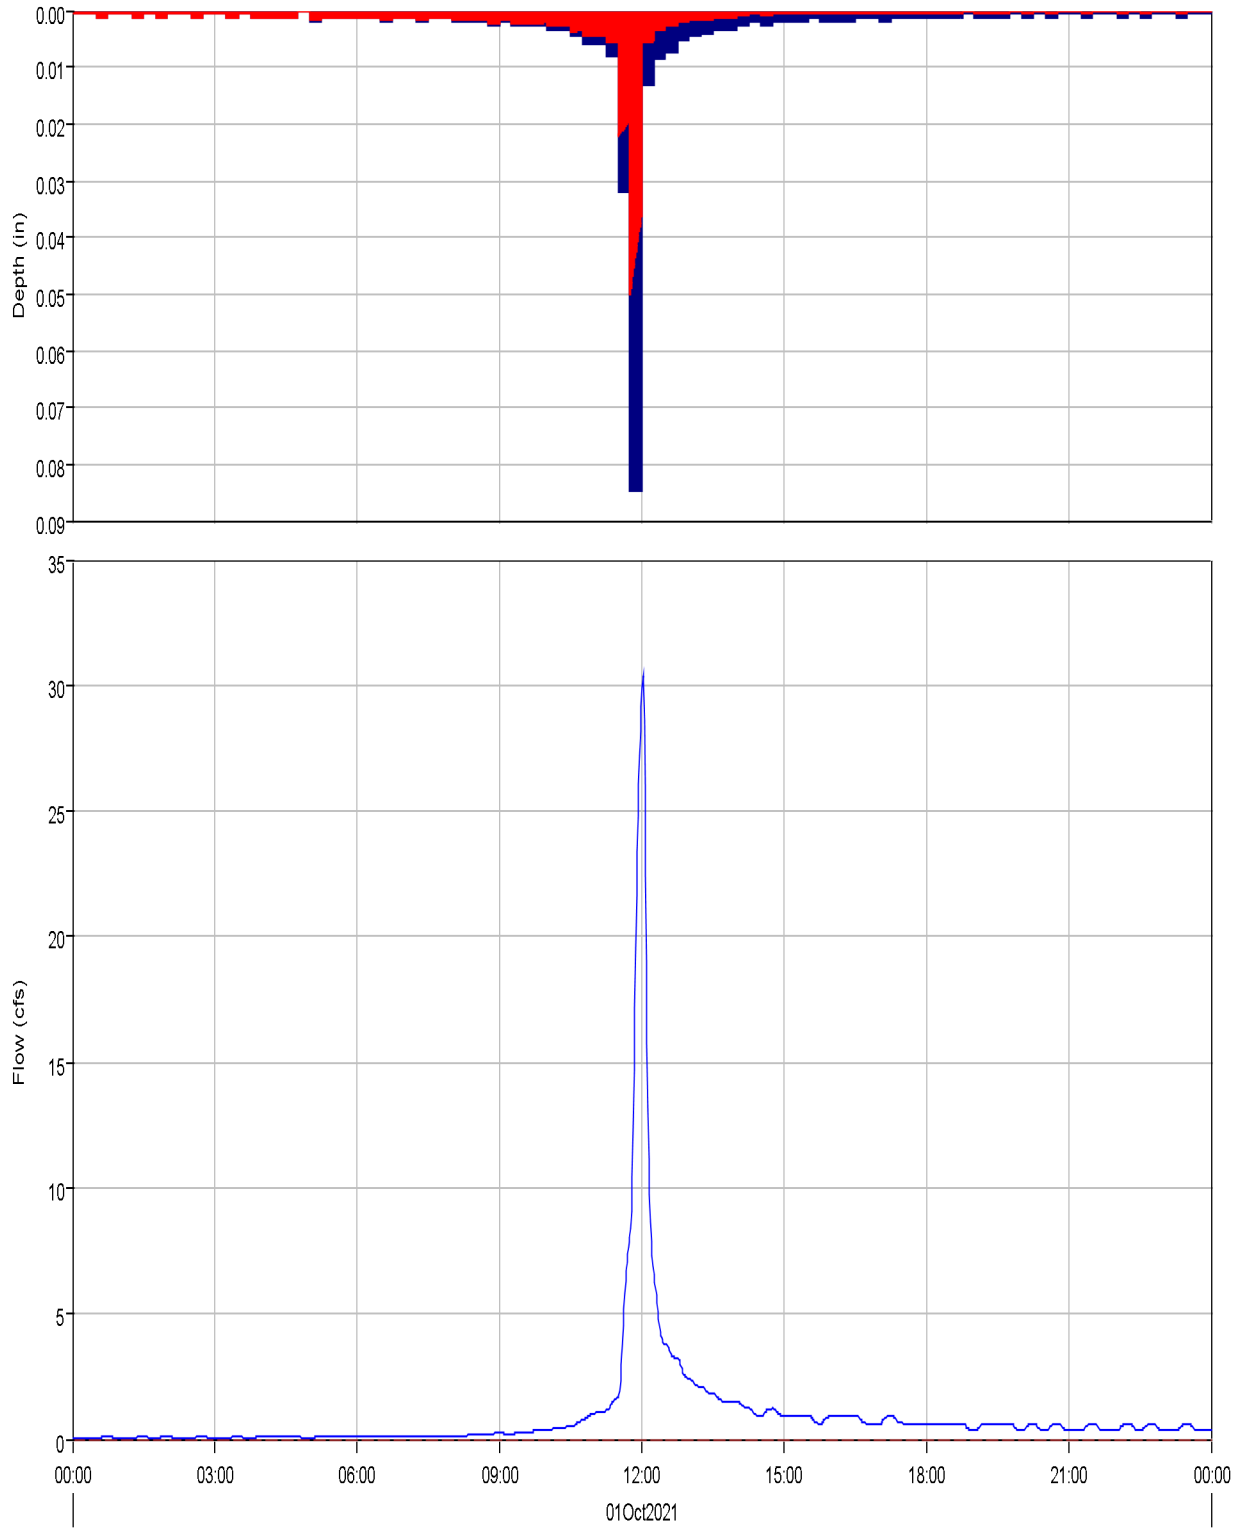

Run:EV 100-yr Pr. Type II Element:PB8 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB8 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB8 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB8 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB8


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	30.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:01
Total Precipitation :	4.5 (AC-FT)	Total Direct Runoff :	2.0 (AC-FT)
Total Loss :	2.5 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.0 (AC-FT)	Discharge :	2.0 (AC-FT)

Subbasin "PB9" Results for Run "EV 100-yr Pr. Type II"

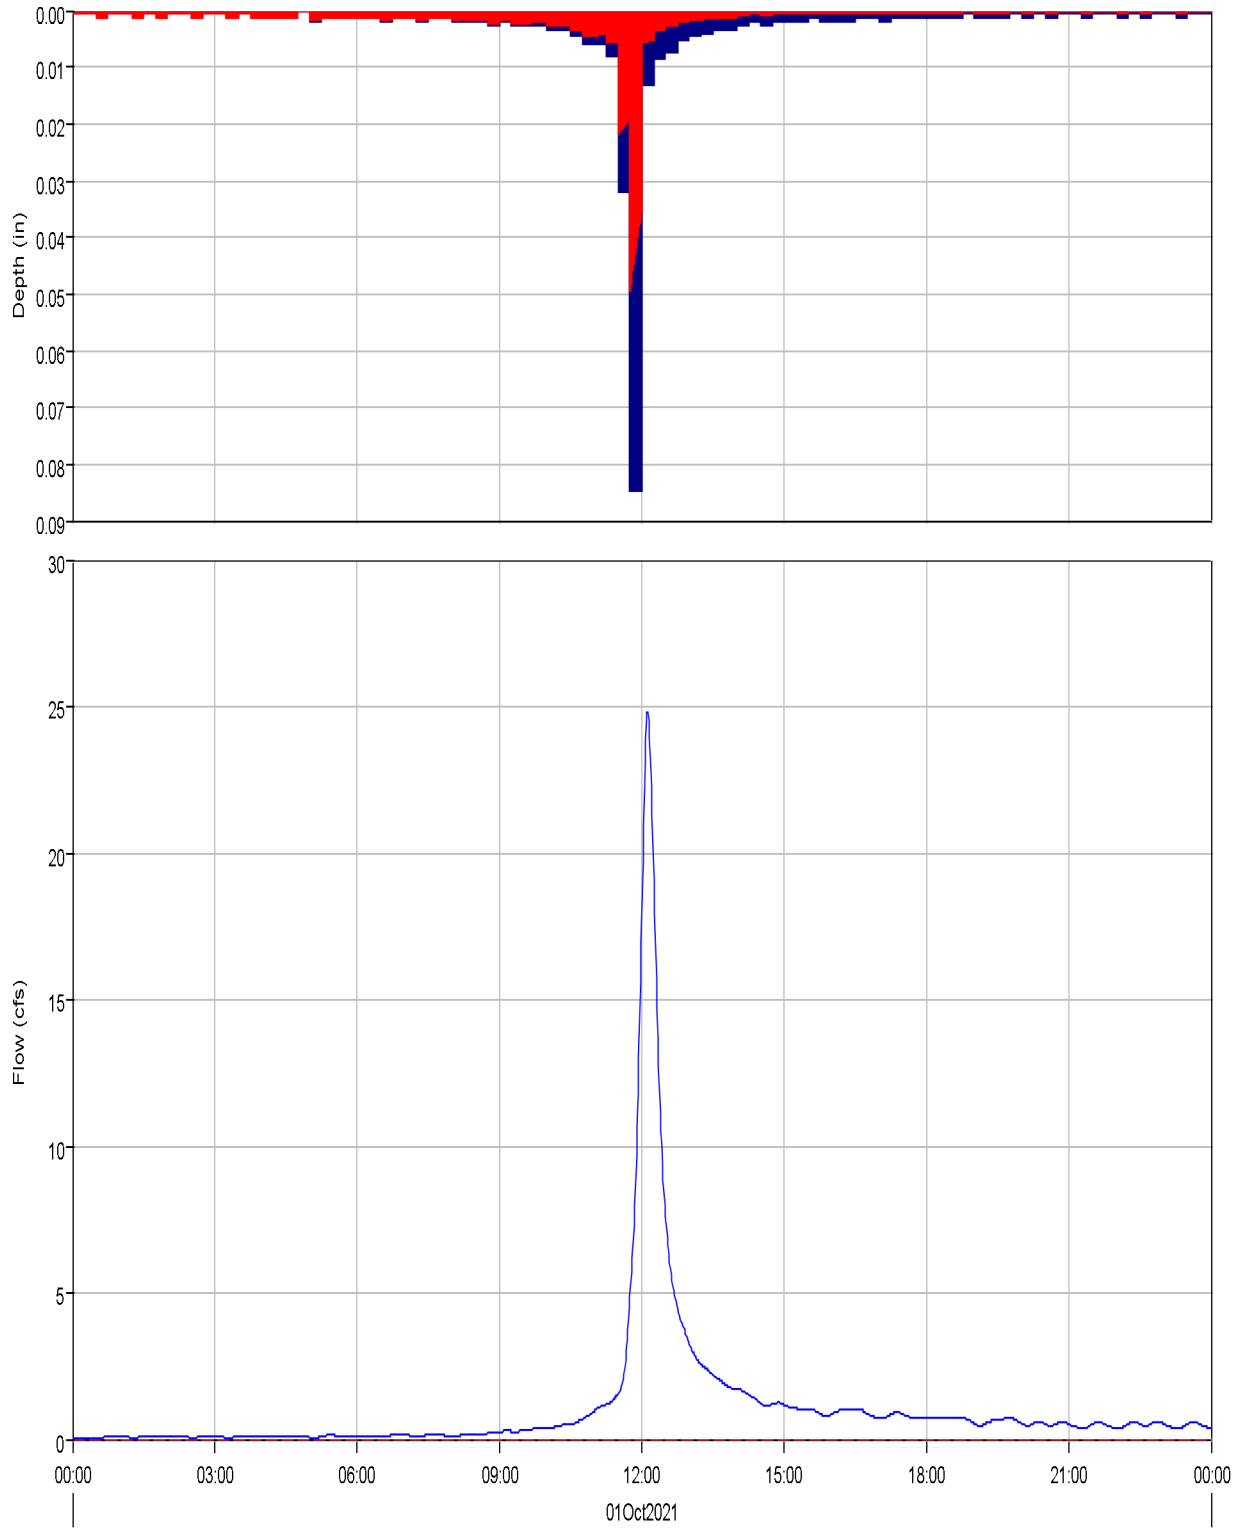

Run:EV 100-yr Pr. Type II Element:PB9 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB9 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB9 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB9 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB9



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	24.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:07
Total Precipitation :	4.9 (AC-FT)	Total Direct Runoff :	2.2 (AC-FT)
Total Loss :	2.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.2 (AC-FT)	Discharge :	2.2 (AC-FT)

Subbasin "PB10" Results for Run "EV 100-yr Pr. Type II"

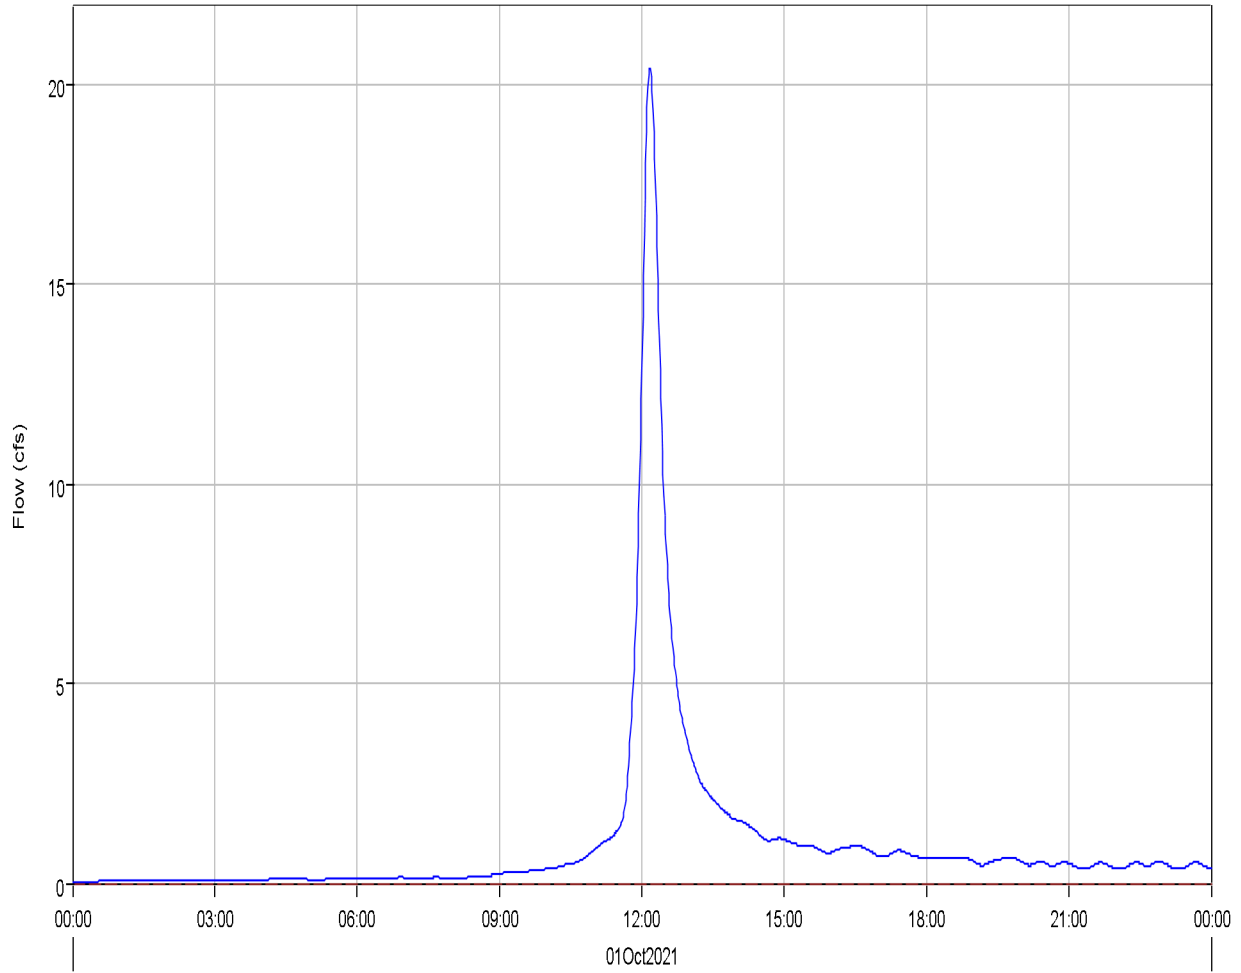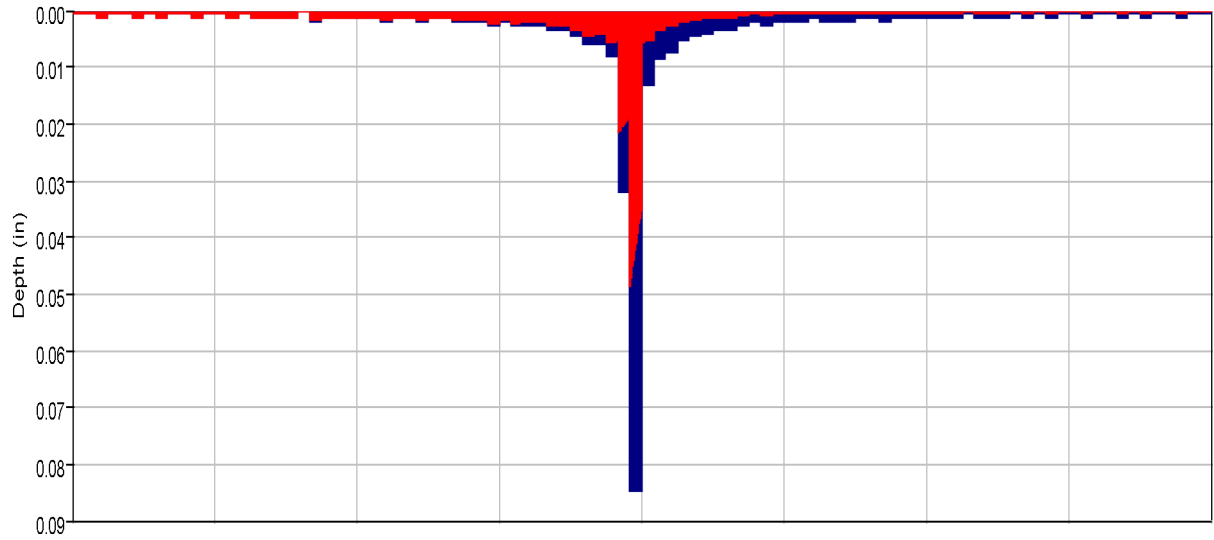

Run:EV 100-yr Pr. Type II Element:PB10 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB10 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB10 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB10 Result:Baseflow



Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB10
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	20.4 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	4.4 (AC-FT)	Total Direct Runoff :	2.0 (AC-FT)
Total Loss :	2.4 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.0 (AC-FT)	Discharge :	2.0 (AC-FT)

Subbasin "PB11" Results for Run "EV 100-yr Pr. Type II"

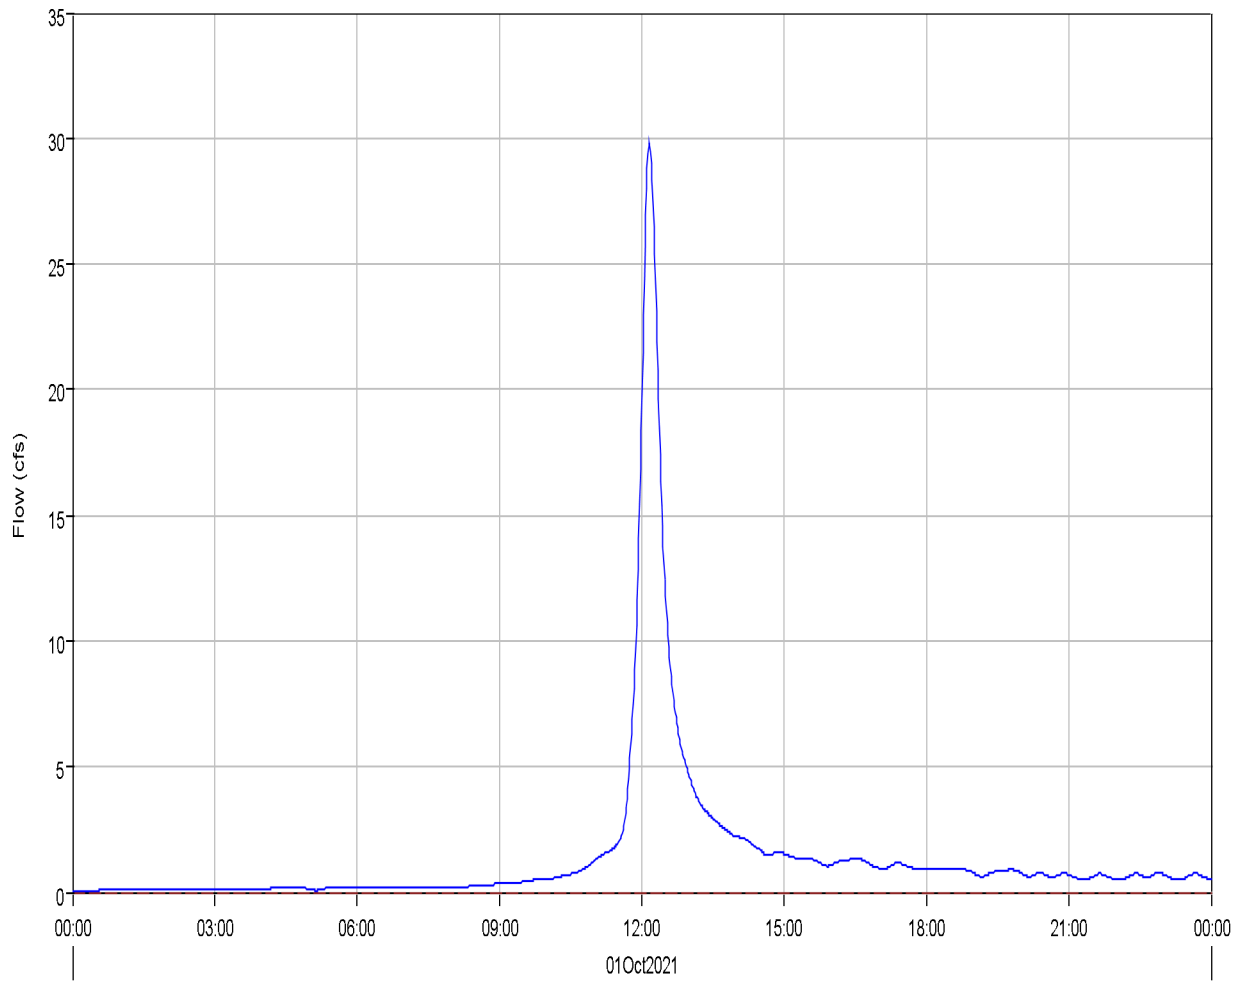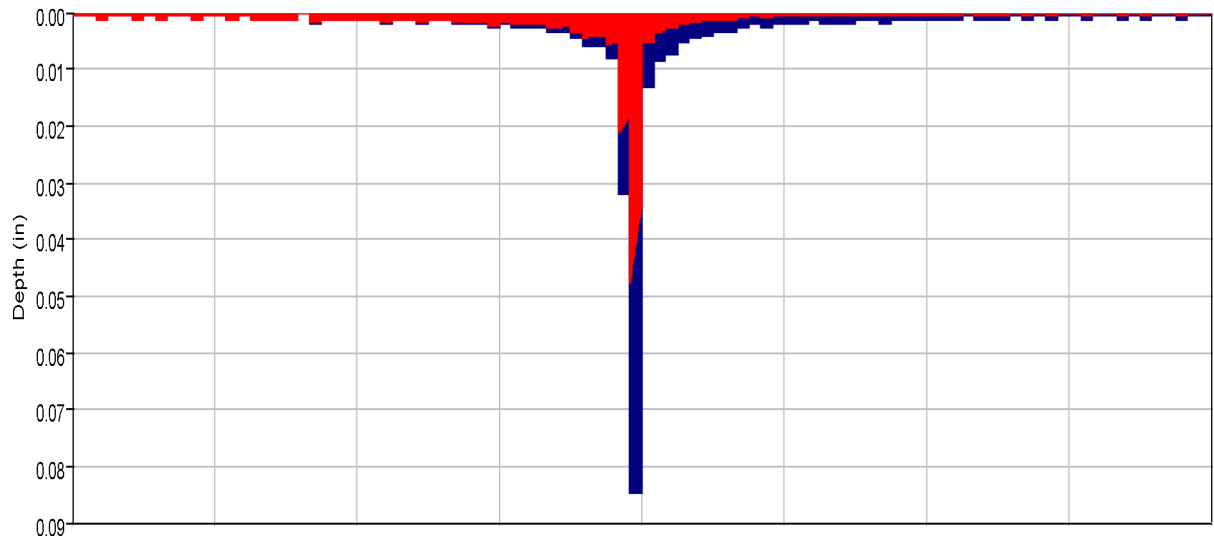

- Run:EV 100-yr Pr. Type II Element:PB11 Result:Precipitation
- Run:EV 100-yr Pr. Type II Element:PB11 Result:Precipitation Loss
- Run:EV 100-yr Pr. Type II Element:PB11 Result:Outflow
- Run:EV 100-yr Pr. Type II Element:PB11 Result:Baseflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB11
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	29.8 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:10
Total Precipitation :	6.2 (AC-FT)	Total Direct Runoff :	2.9 (AC-FT)
Total Loss :	3.3 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.9 (AC-FT)	Discharge :	2.9 (AC-FT)

Subbasin "PB12" Results for Run "EV 100-yr Pr. Type II"

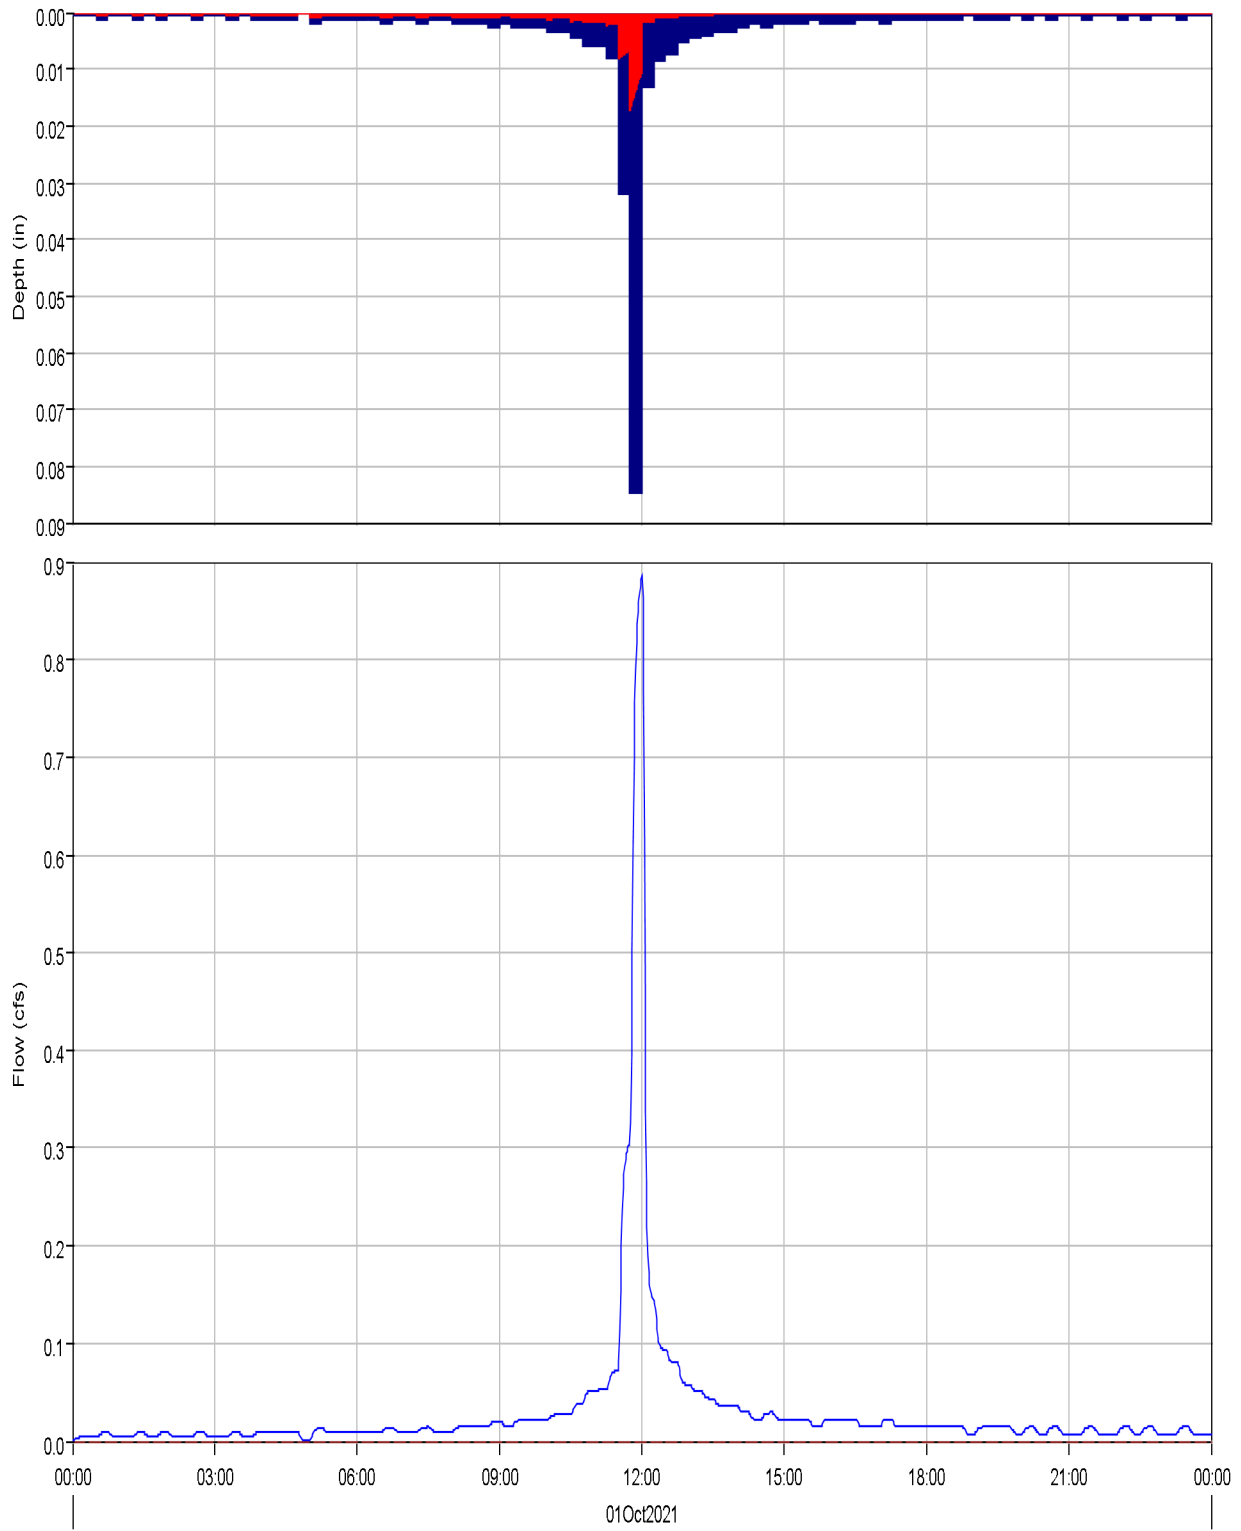

Run:EV 100-yr Pr. Type II Element:PB12 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB12 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB12 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB12 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB12



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	0.9 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	0.1 (AC-FT)	Total Direct Runoff :	0.1 (AC-FT)
Total Loss :	0.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.1 (AC-FT)	Discharge :	0.1 (AC-FT)

Subbasin "PB13" Results for Run "EV 100-yr Pr. Type II"

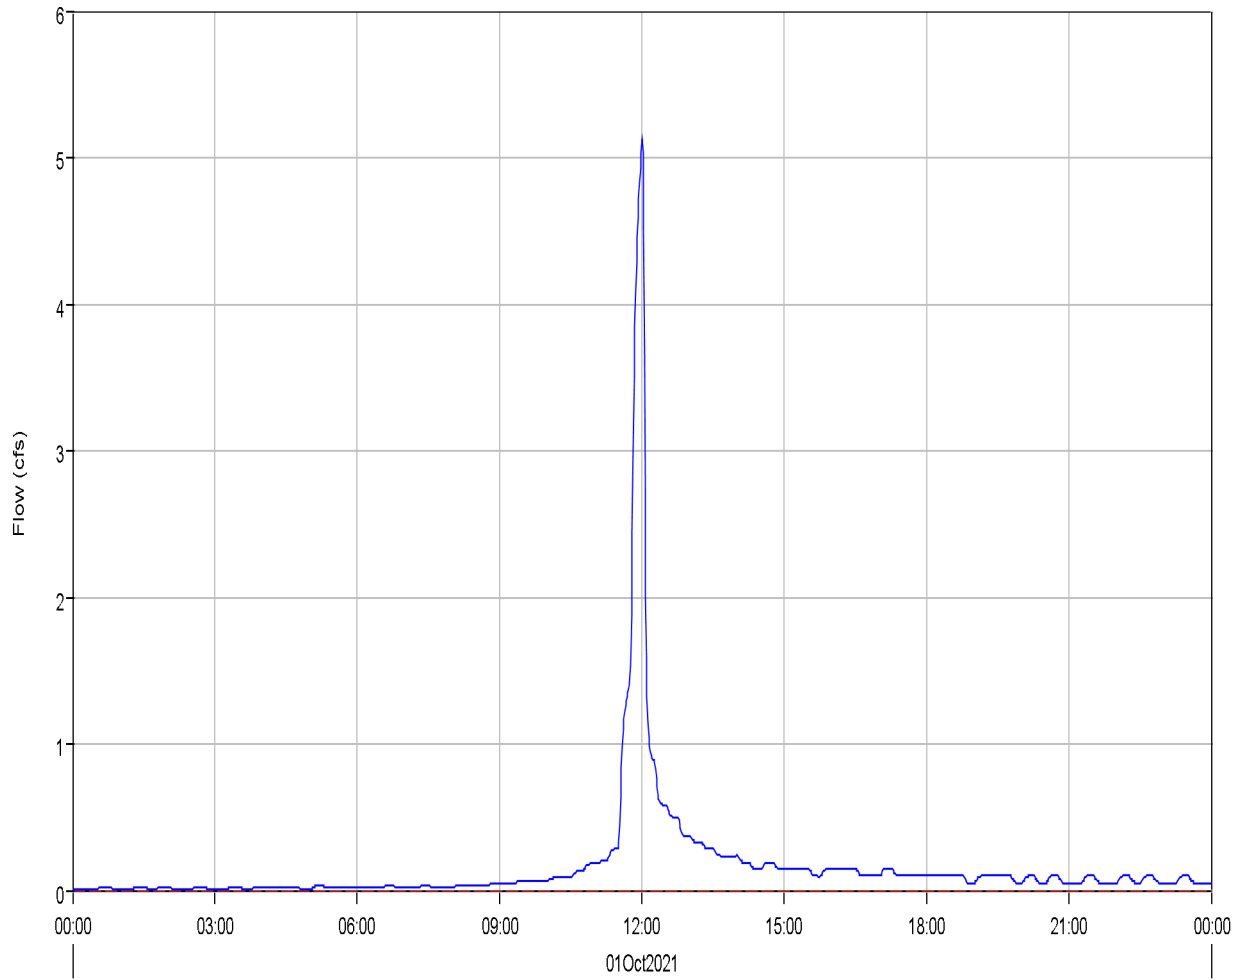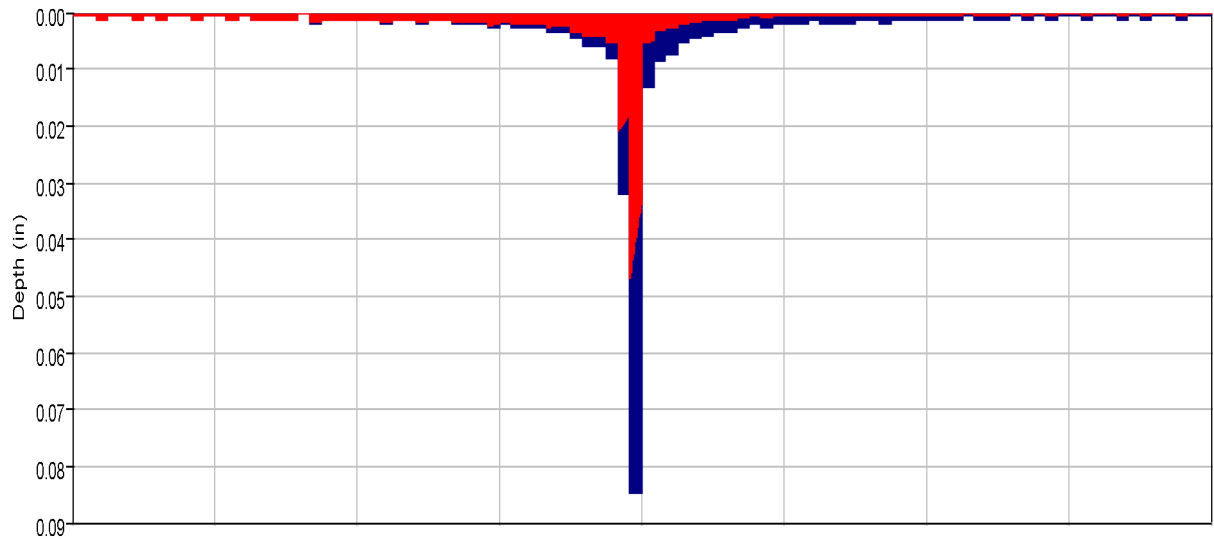

Run:EV 100-yr Pr. Type II Element:PB13 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB13 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB13 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB13 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB13



Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	5.1 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	0.7 (AC-FT)	Total Direct Runoff :	0.3 (AC-FT)
Total Loss :	0.4 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	0.3 (AC-FT)	Discharge :	0.3 (AC-FT)

Subbasin "PB14" Results for Run "EV 100-yr Pr. Type II"

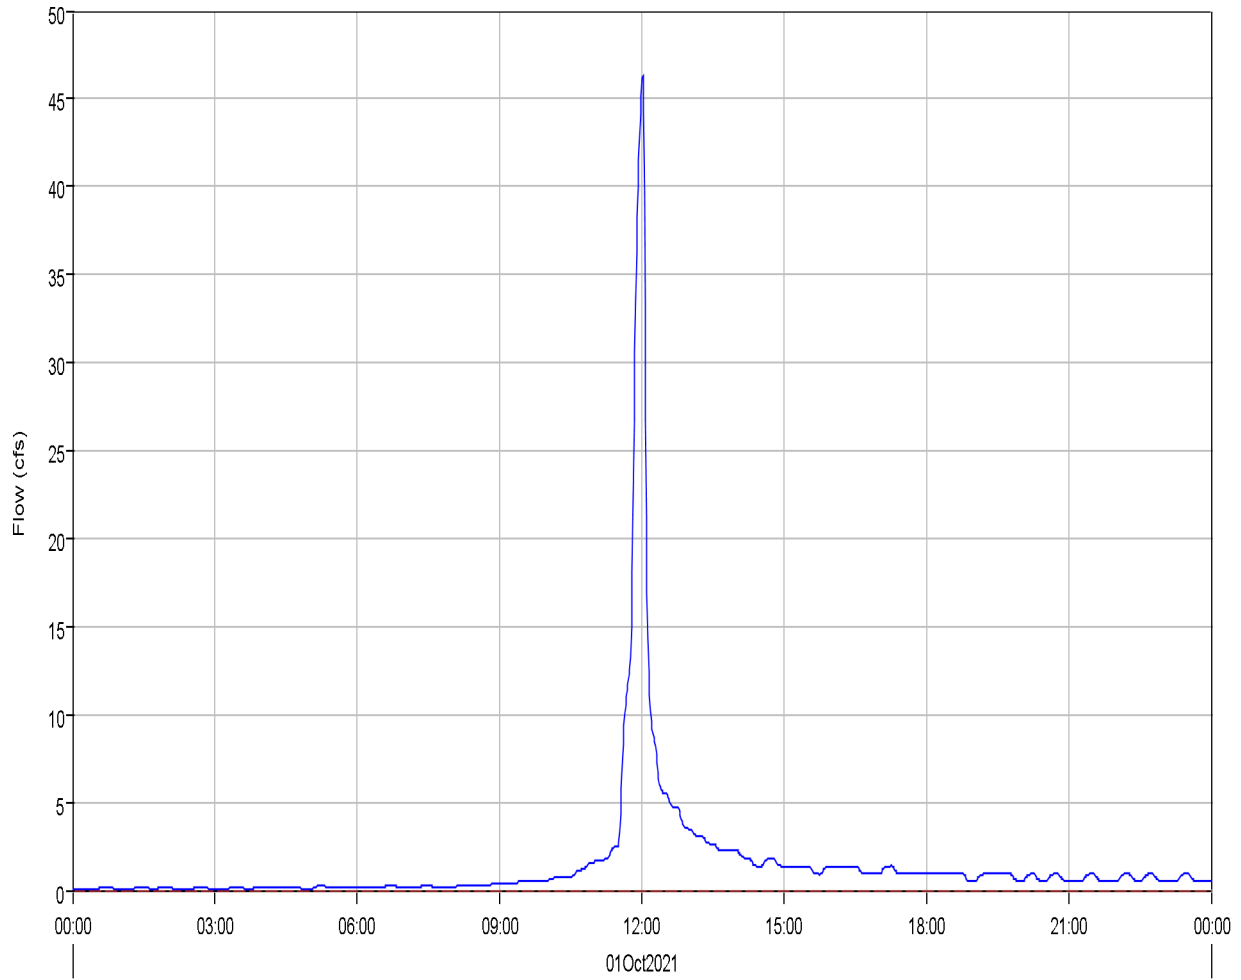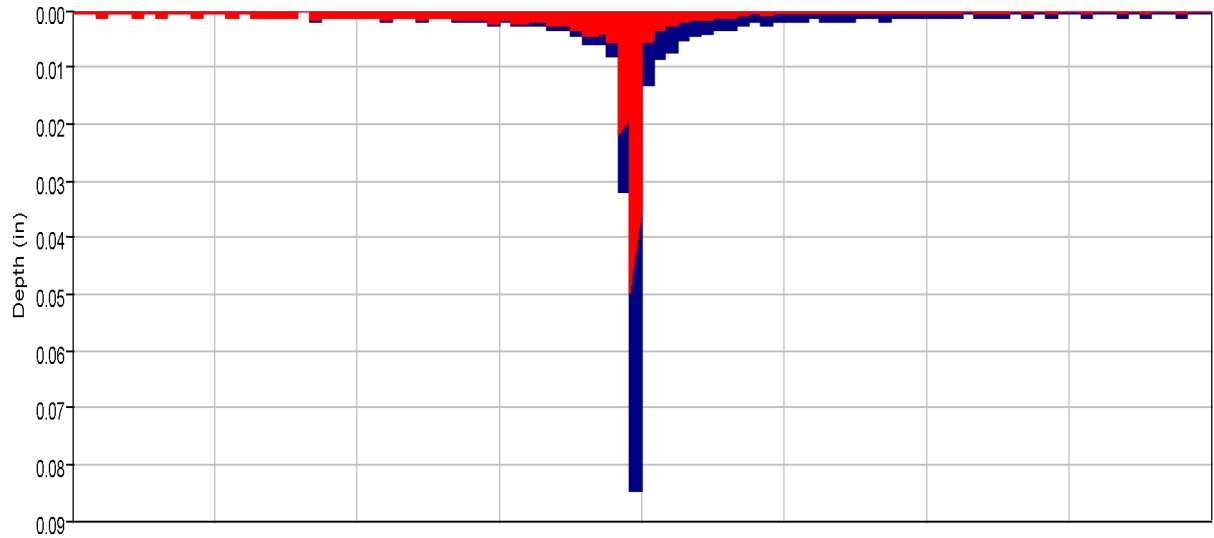

- Run:EV 100-yr Pr. Type II Element:PB14 Result:Precipitation
- Run:EV 100-yr Pr. Type II Element:PB14 Result:Precipitation Loss
- Run:EV 100-yr Pr. Type II Element:PB14 Result:Outflow
- Run:EV 100-yr Pr. Type II Element:PB14 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB14


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	46.3 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:01
Total Precipitation :	6.6 (AC-FT)	Total Direct Runoff :	2.9 (AC-FT)
Total Loss :	3.7 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	2.9 (AC-FT)	Discharge :	2.9 (AC-FT)

Subbasin "PB15" Results for Run "EV 100-yr Pr. Type II"

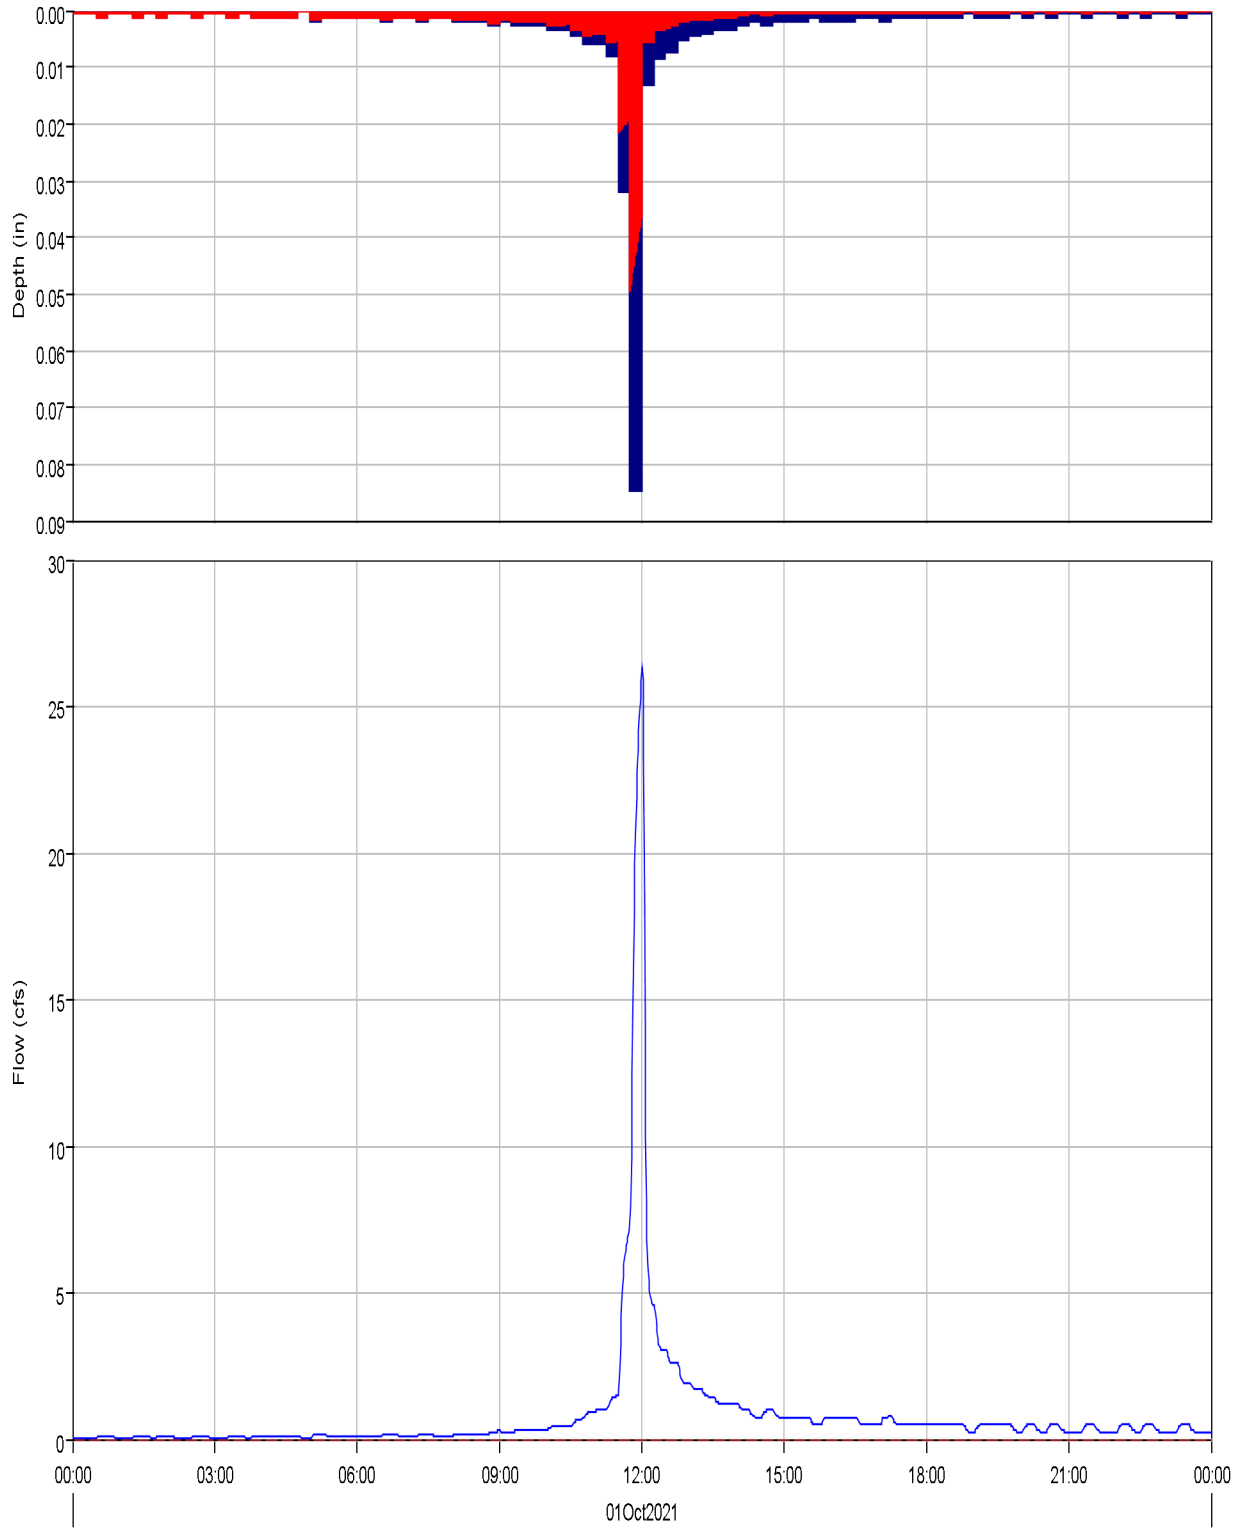

Run:EV 100-yr Pr. Type II Element:PB15 Result:Precipitation
Run:EV 100-yr Pr. Type II Element:PB15 Result:Outflow

Run:EV 100-yr Pr. Type II Element:PB15 Result:Precipitation Loss
Run:EV 100-yr Pr. Type II Element:PB15 Result:Baseflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Subbasin: PB15


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Discharge :	26.3 (CFS)	Date/Time of Peak Discharge :	01Oct2021, 12:00
Total Precipitation :	3.7 (AC-FT)	Total Direct Runoff :	1.7 (AC-FT)
Total Loss :	2.0 (AC-FT)	Total Baseflow :	0.0 (AC-FT)
Total Excess :	1.7 (AC-FT)	Discharge :	1.7 (AC-FT)

Reach 'R-OB1' Results for Run 'EV 100-yr Pr. Type II'

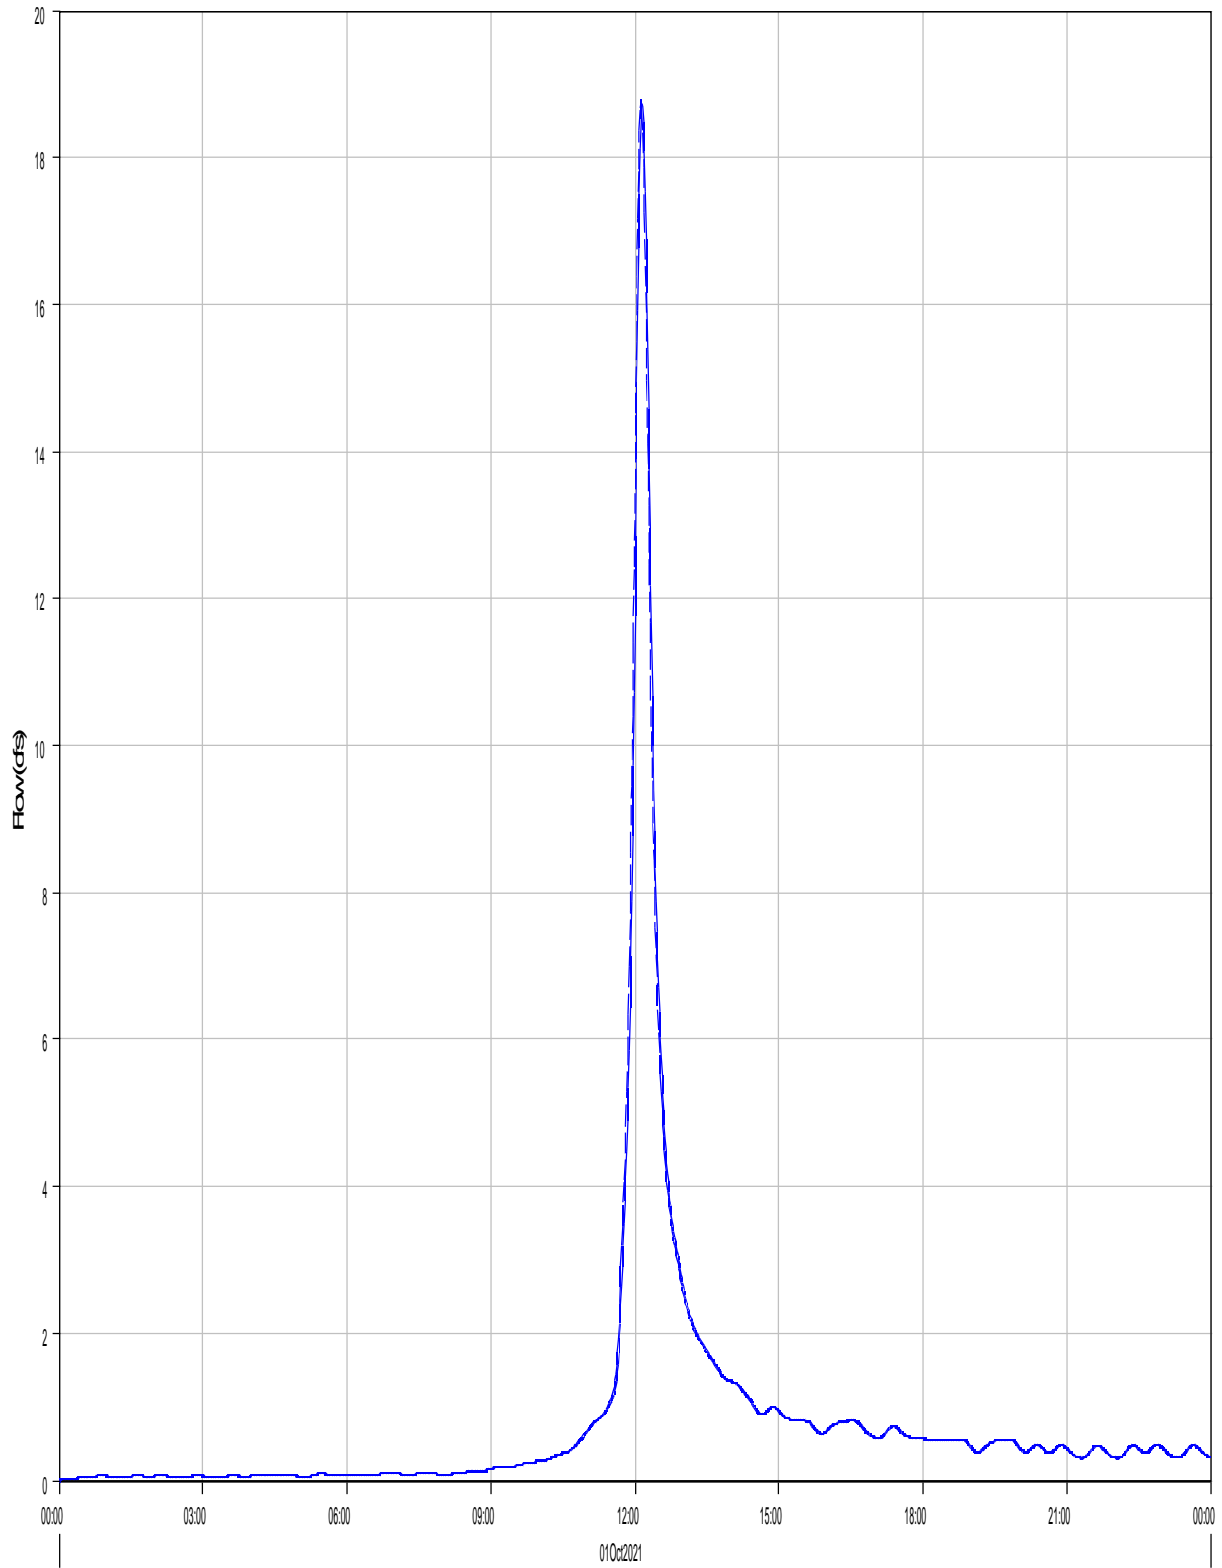

Run:EV 100-yr Pr. Type II Element:R-OB1 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-OB1 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-OB1
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	18.8 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	18.7 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:09
Total Inflow :	1.7 (AC-FT)	Total Outflow :	1.7 (AC-FT)

Reach 'R-OB2' Results for Run 'EV 100-yr Pr. Type II'

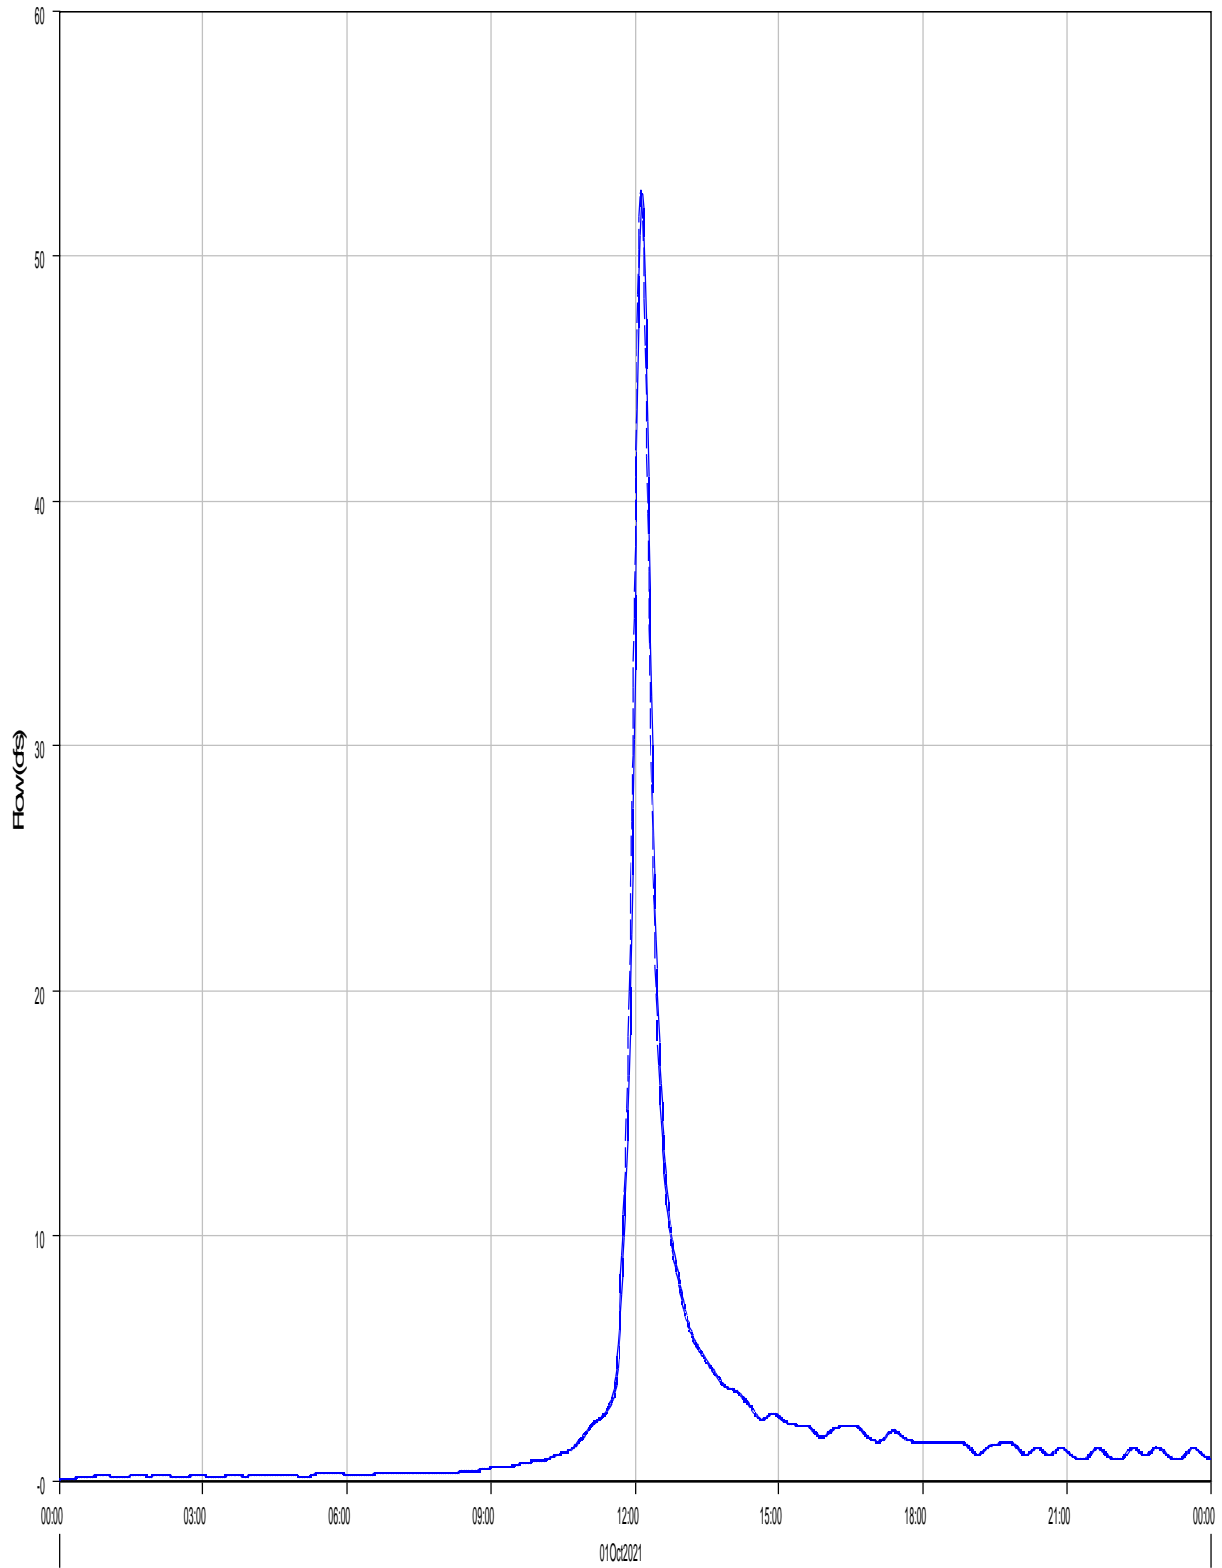

Run:EV 100-yr Pr. Type II Element:R-OB2 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-OB2 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-OB2
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	52.7 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	52.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:09
Total Inflow :	4.7 (AC-FT)	Total Outflow :	4.7 (AC-FT)

Reach 'R-0B4-A' Results for Run 'EV 100-yr Pr. Type II'

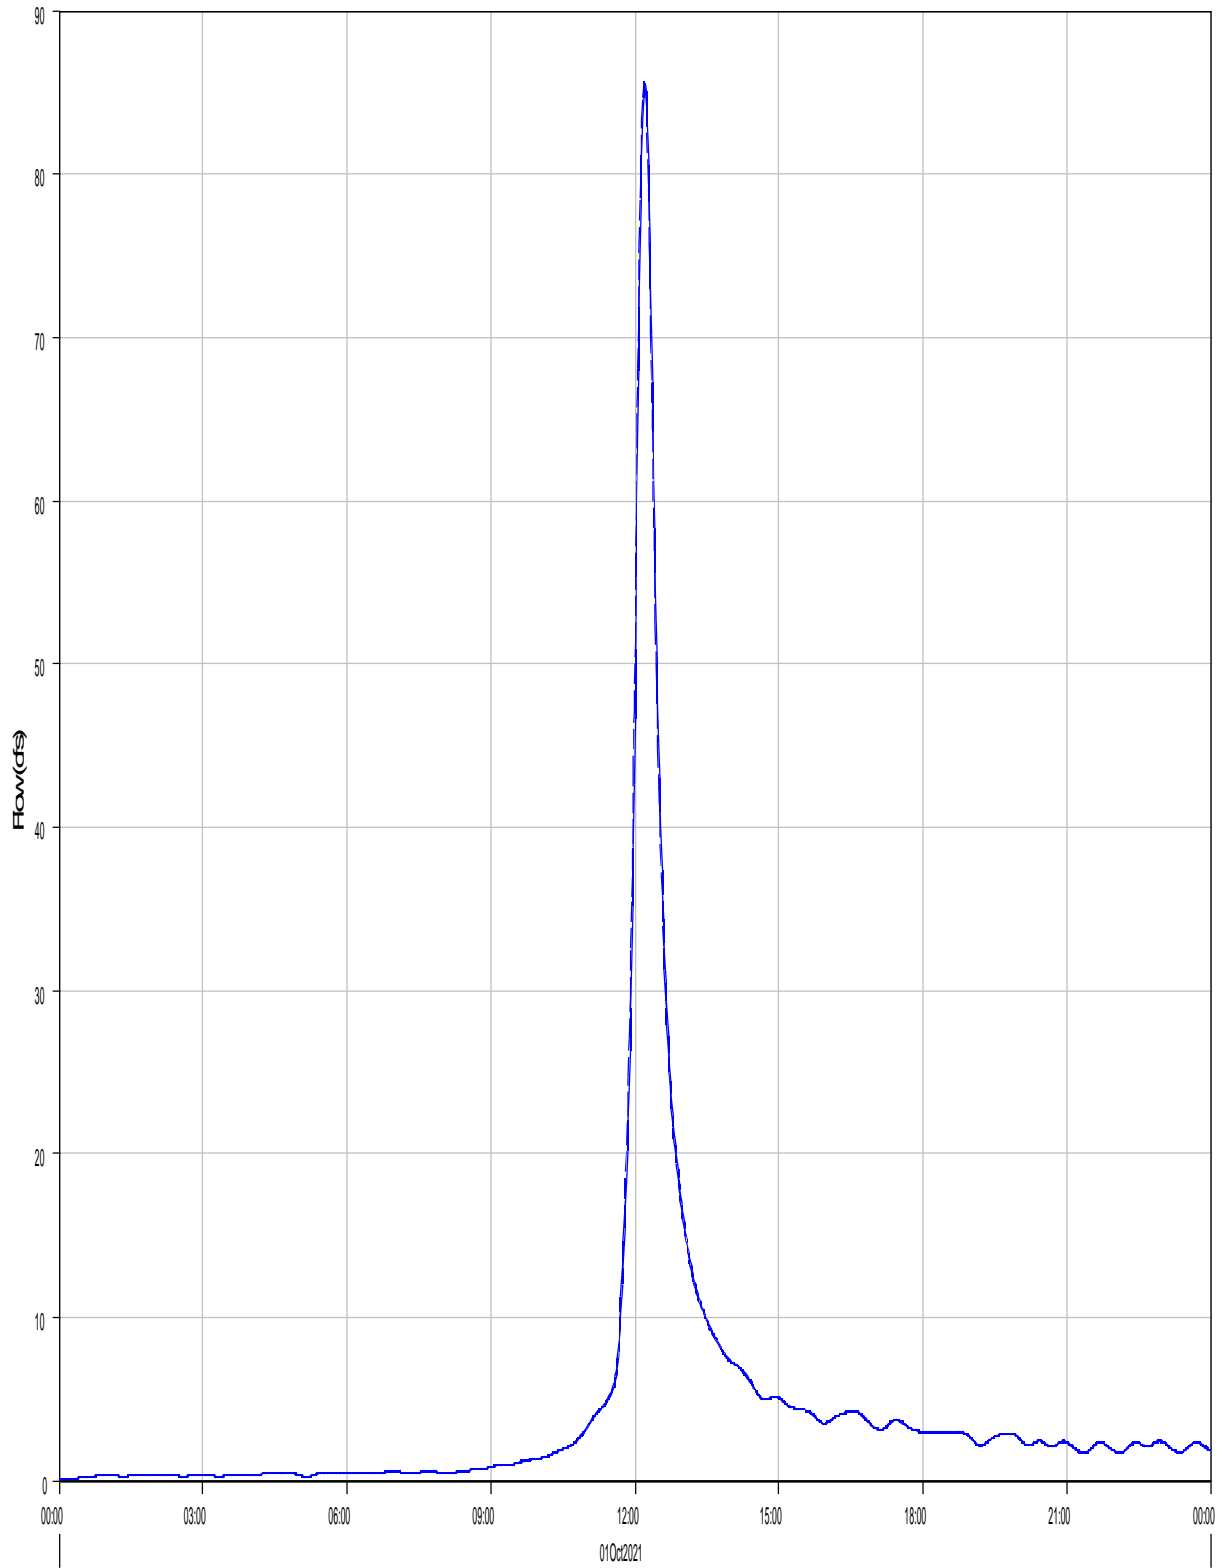

Run:EV 100-yr Pr. Type II Element:R-0B4-A Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-0B4-A Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-OB4-A


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	85.6 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:12
Peak Outflow :	85.5 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	8.8 (AC-FT)	Total Outflow :	8.8 (AC-FT)

Reach 'R-0B4-B' Results for Run 'EV 100-yr Pr. Type II'

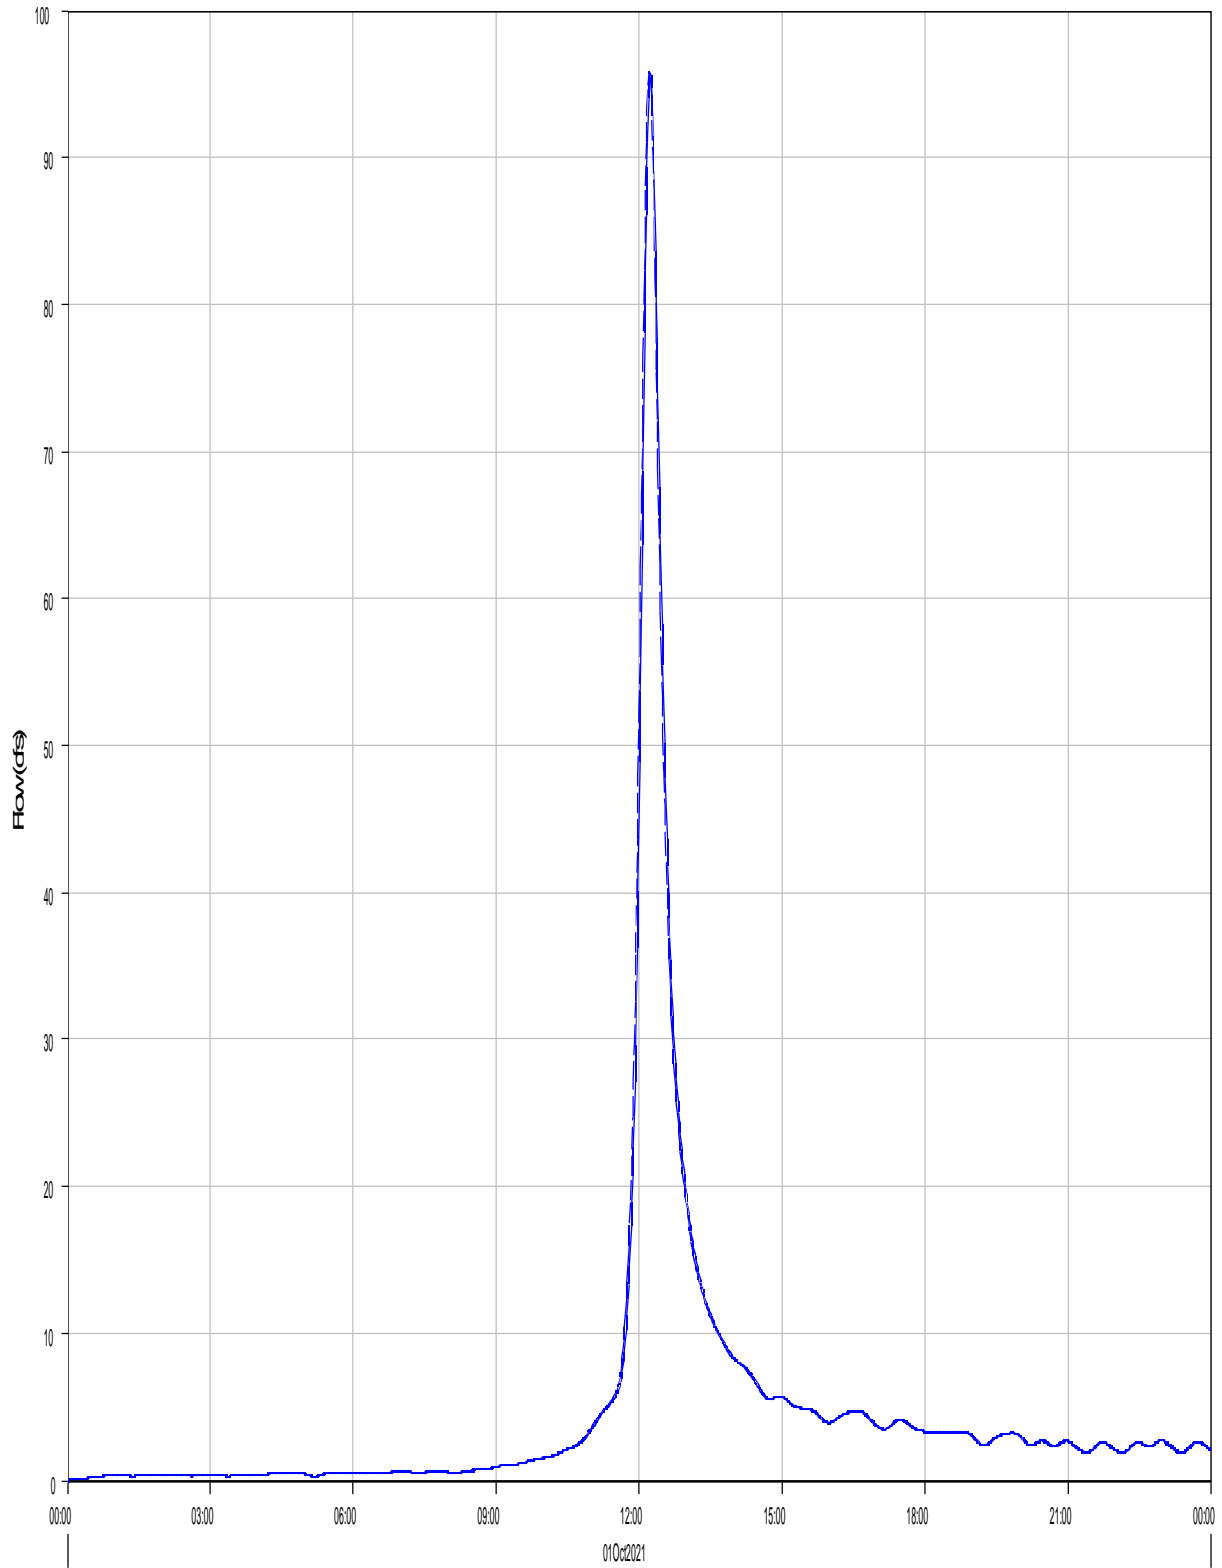

Run:EV 100-yr Pr. Type II Element:R-0B4-B Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-0B4-B Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-OB4-B


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	95.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	95.8 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:14
Total Inflow :	9.8 (AC-FT)	Total Outflow :	9.8 (AC-FT)

Reach 'R-OB7' Results for Run 'EV 100-yr Pr. Type II'

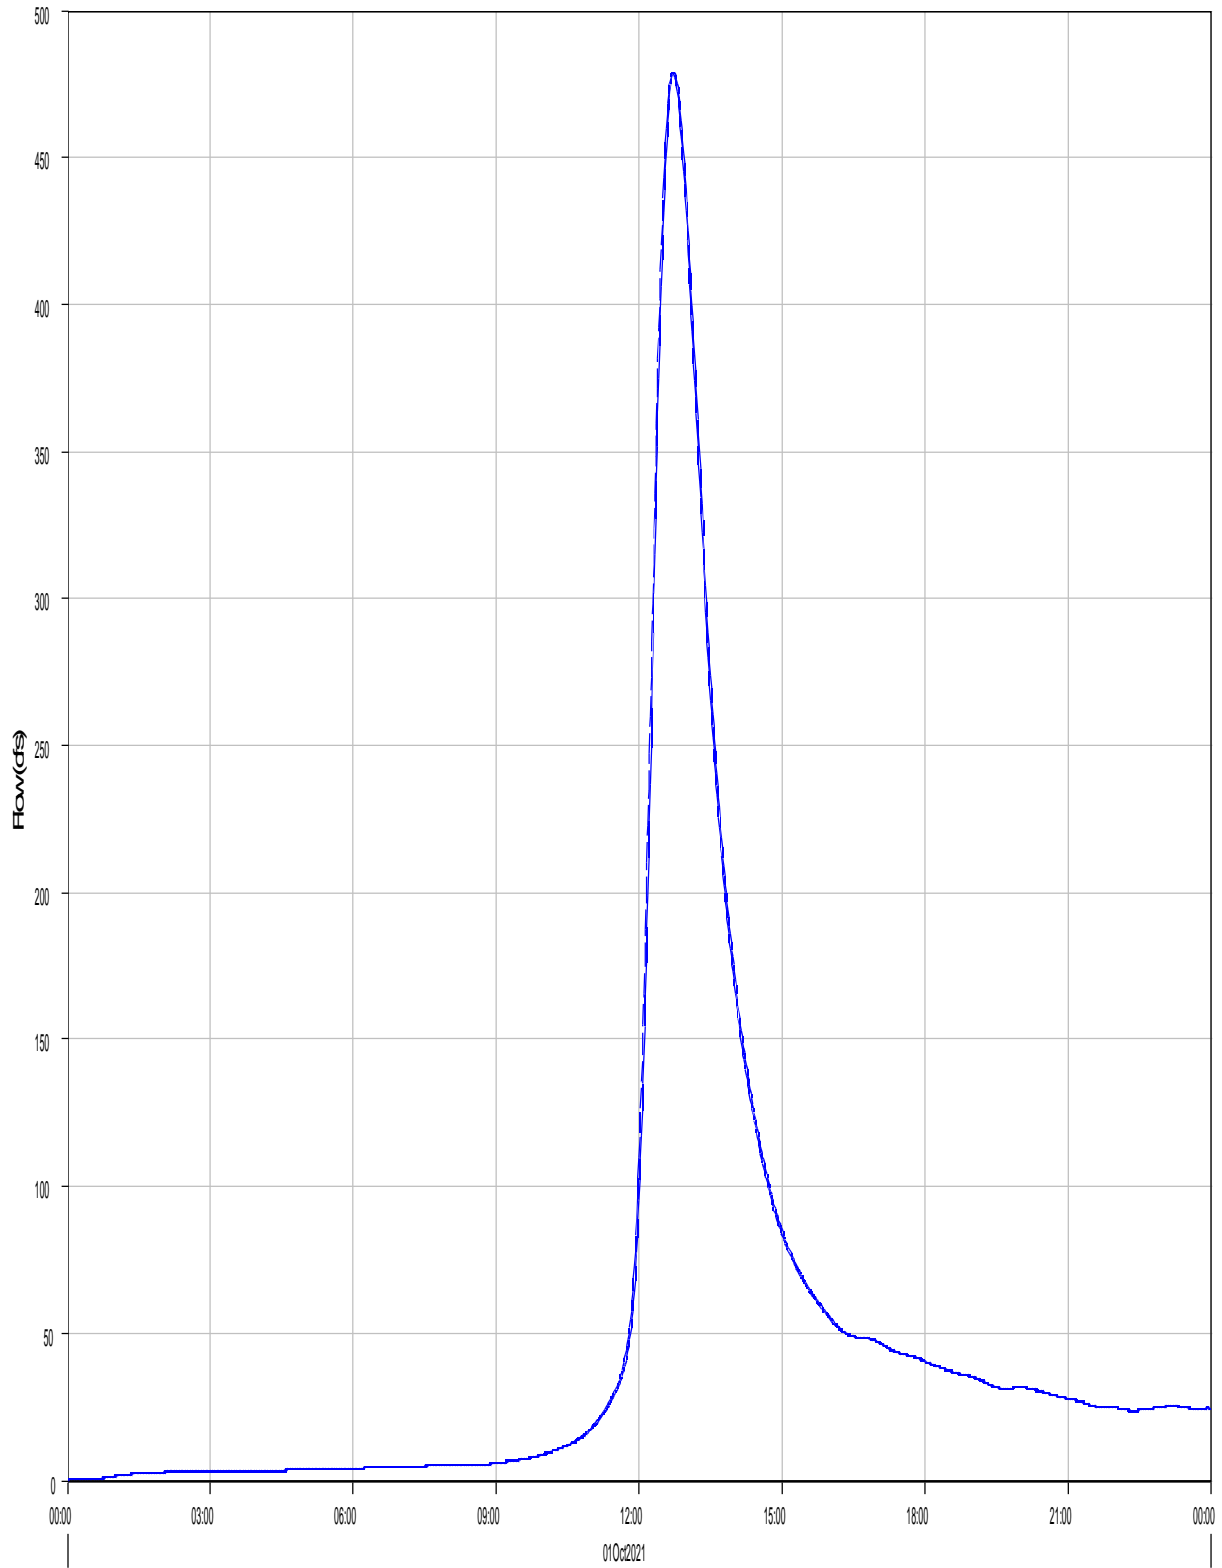

Run:EV 100-yr Pr. Type II Element:R-OB7 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-OB7 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-OB7
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	479.0 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:42
Peak Outflow :	479.0 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:44
Total Inflow :	98.2 (AC-FT)	Total Outflow :	98.1 (AC-FT)

Reach 'R-OB8' Results for Run 'EV 100-yr Pr. Type II'

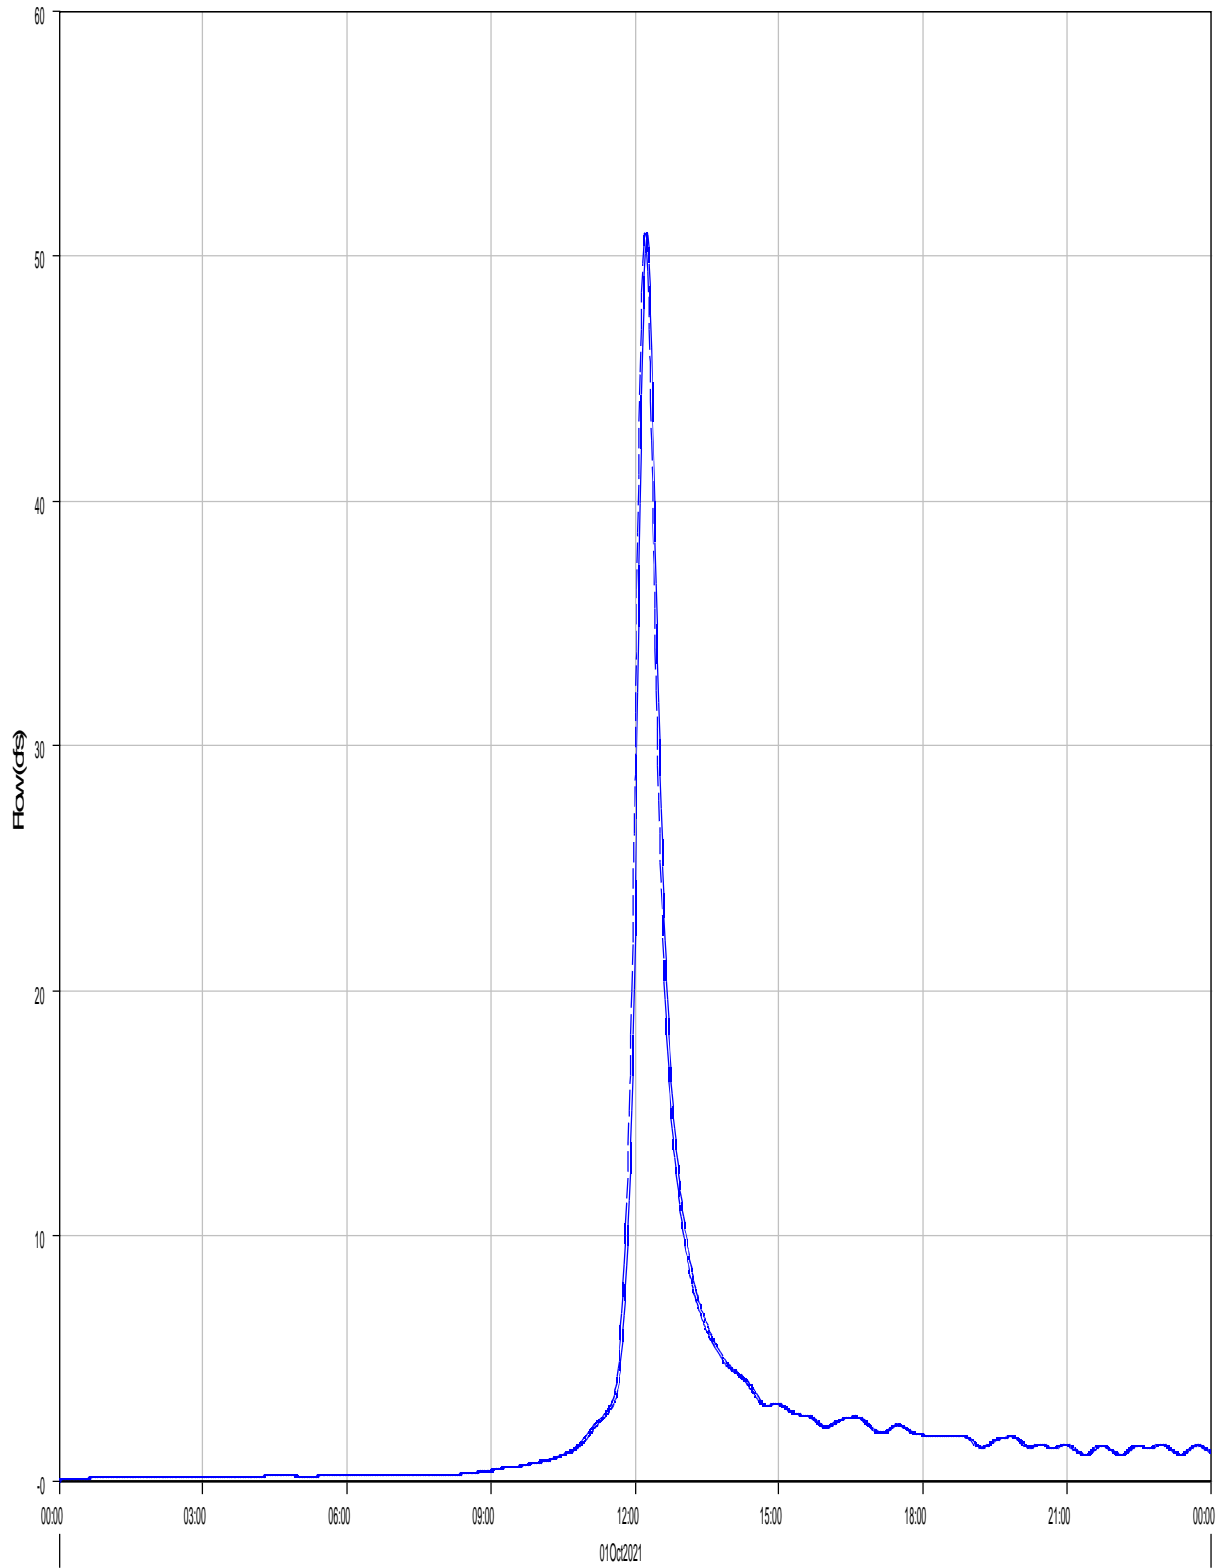

Run:EV 100-yr Pr. Type II Element:R-OB8 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-OB8 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-OB8
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	51.0 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	50.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:15
Total Inflow :	5.3 (AC-FT)	Total Outflow :	5.3 (AC-FT)

Reach 'R-PB3' Results for Run 'EV 100-yr Pr. Type II'

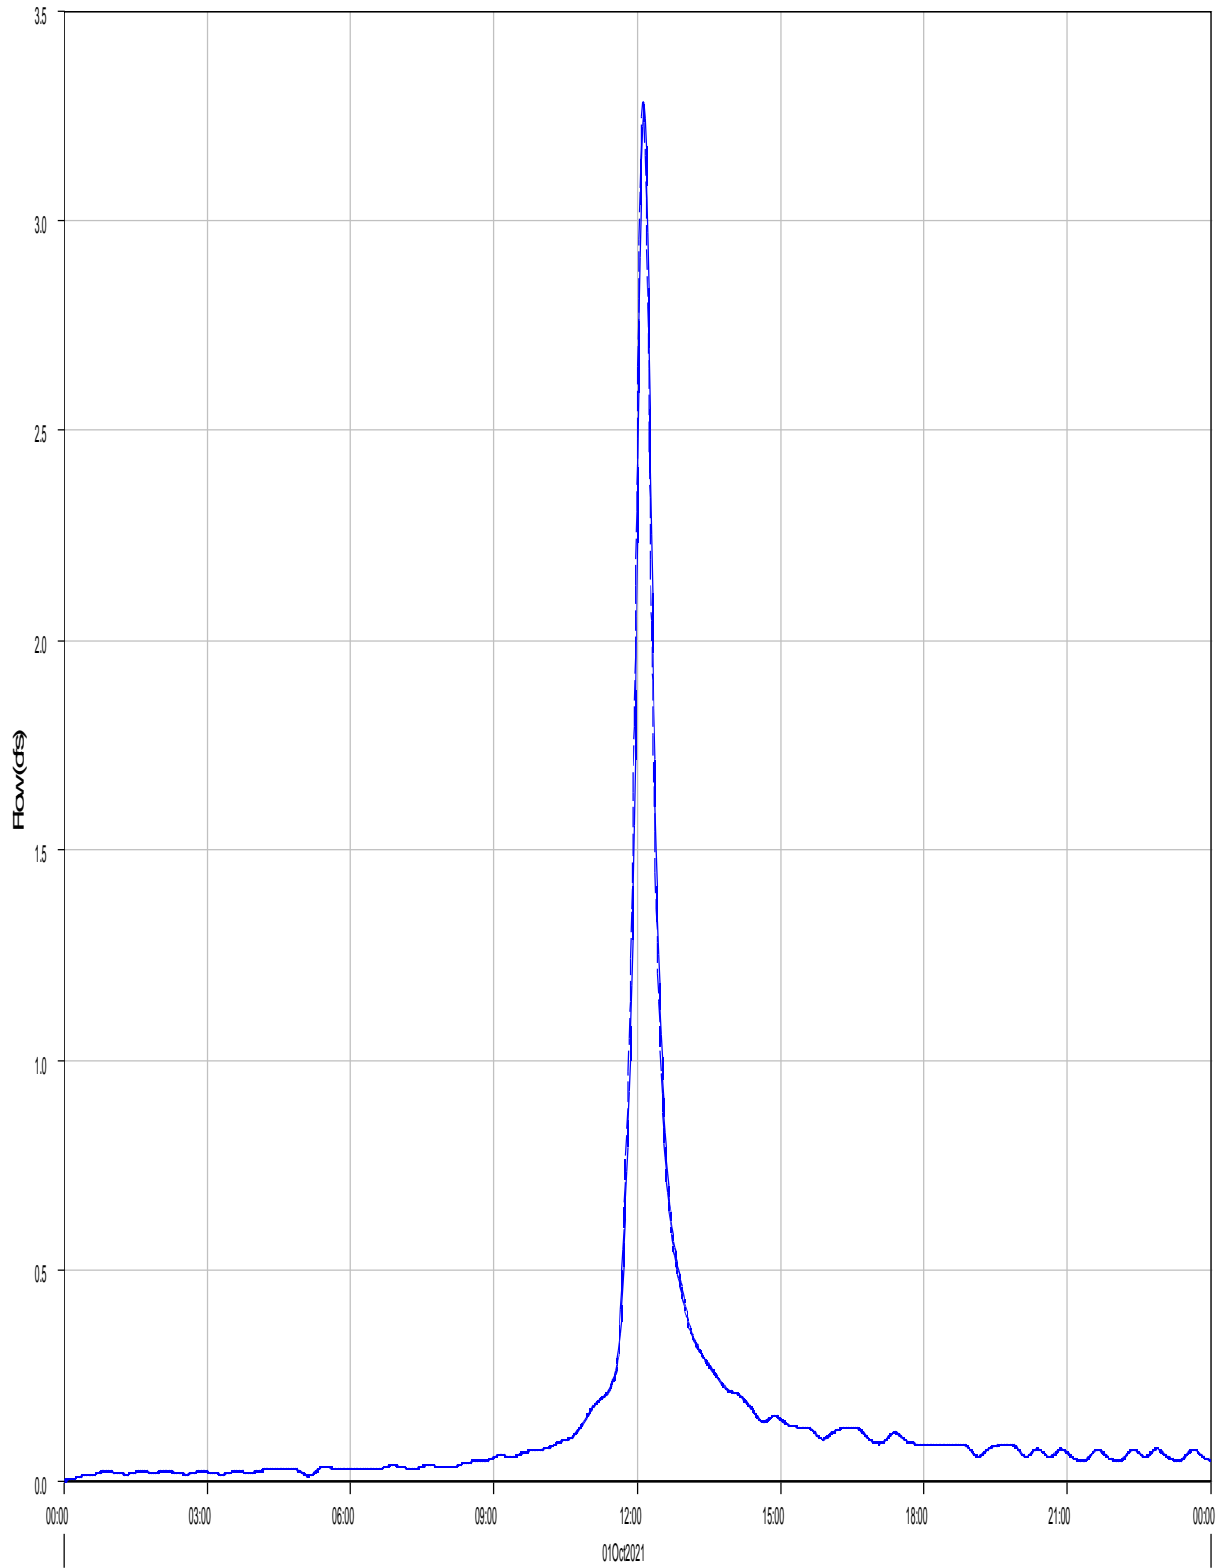

Run:EV 100-yr Pr. Type II Element:R-PB3 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB3 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB3
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	3.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:07
Peak Outflow :	3.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:09
Total Inflow :	0.3 (AC-FT)	Total Outflow :	0.3 (AC-FT)

Reach 'R-PB5' Results for Run 'EV 100-yr Pr. Type II'

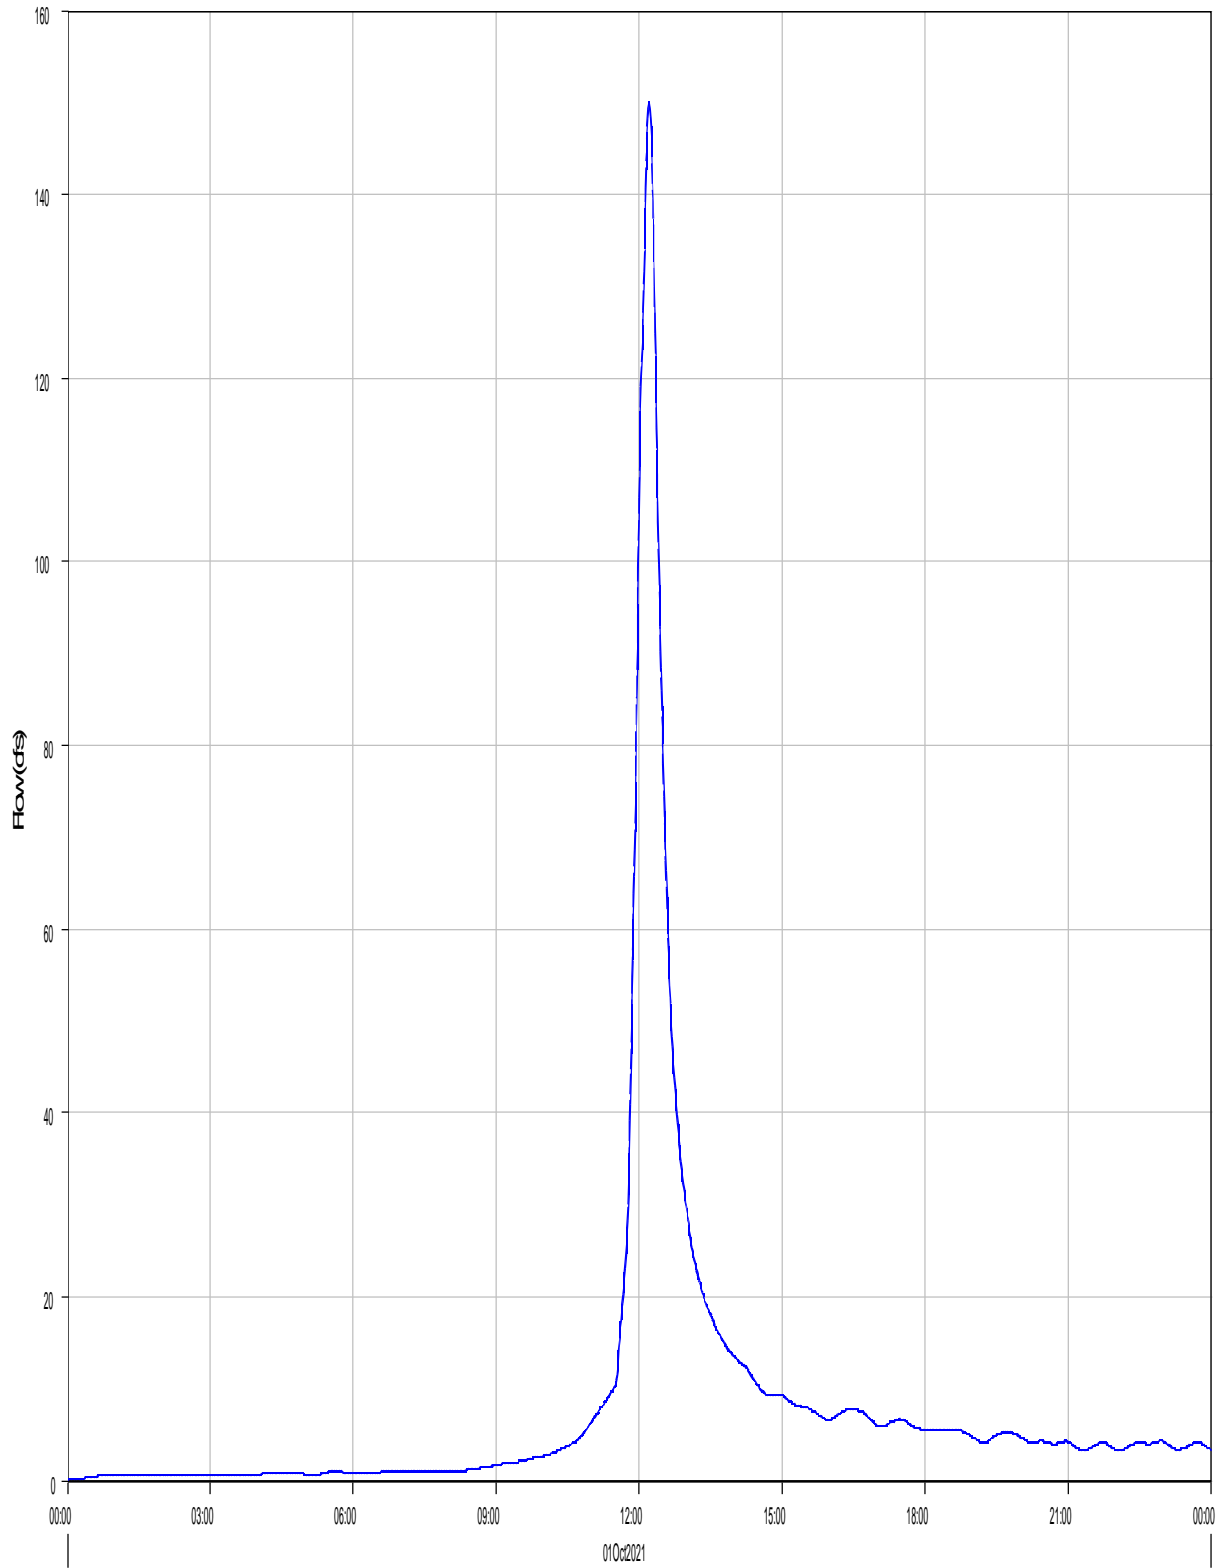

Run:EV 100-yr Pr. Type II Element:R-PB5 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB5 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB5
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	150.1 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:12
Peak Outflow :	150.0 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	16.4 (AC-FT)	Total Outflow :	16.4 (AC-FT)

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB7-A


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	11.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:08
Peak Outflow :	11.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:09
Total Inflow :	1.0 (AC-FT)	Total Outflow :	1.0 (AC-FT)

Reach 'R-PB7-B' Results for Run 'EV 100-yr Pr. Type II'

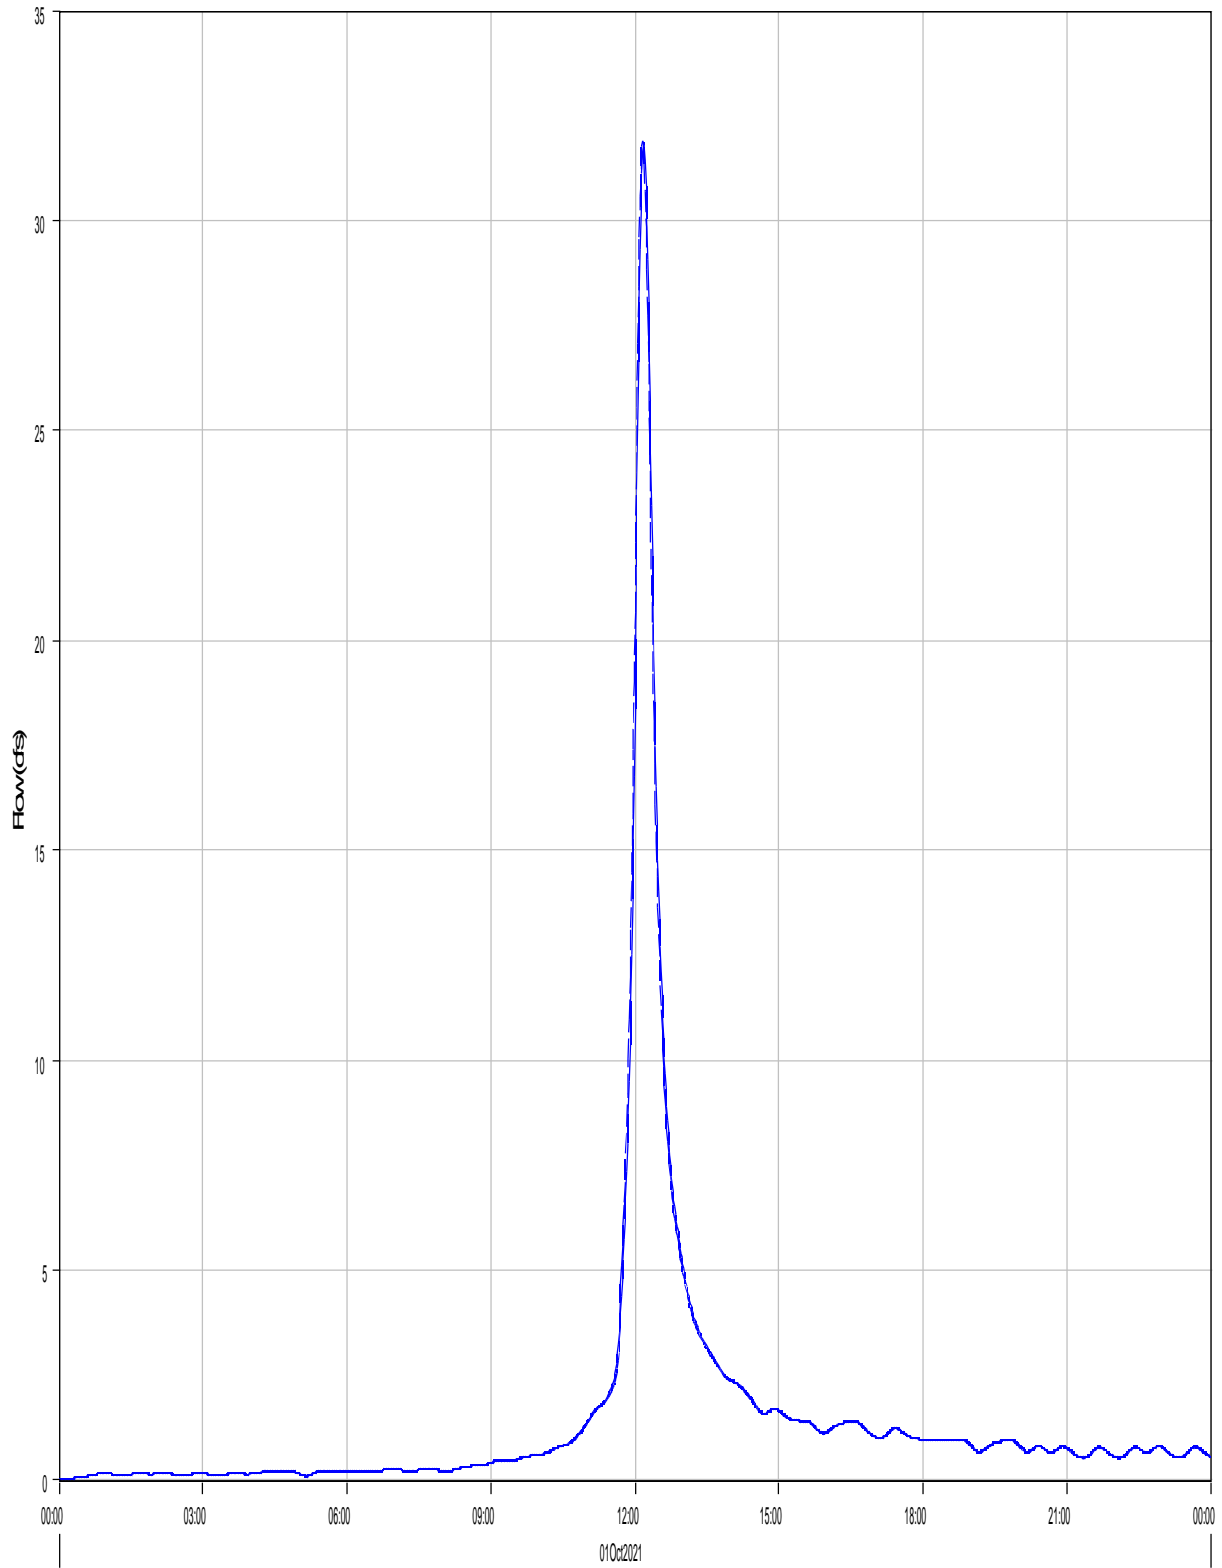

— Run:EV 100-yr Pr. Type II Element:R-PB7-B Result:Outflow

- - - Run:EV 100-yr Pr. Type II Element:R-PB7-B Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB7-B


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	31.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:10
Peak Outflow :	31.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:11
Total Inflow :	3.1 (AC-FT)	Total Outflow :	3.1 (AC-FT)

Reach 'R-PB7-C' Results for Run 'EV 100-yr Pr. Type II'

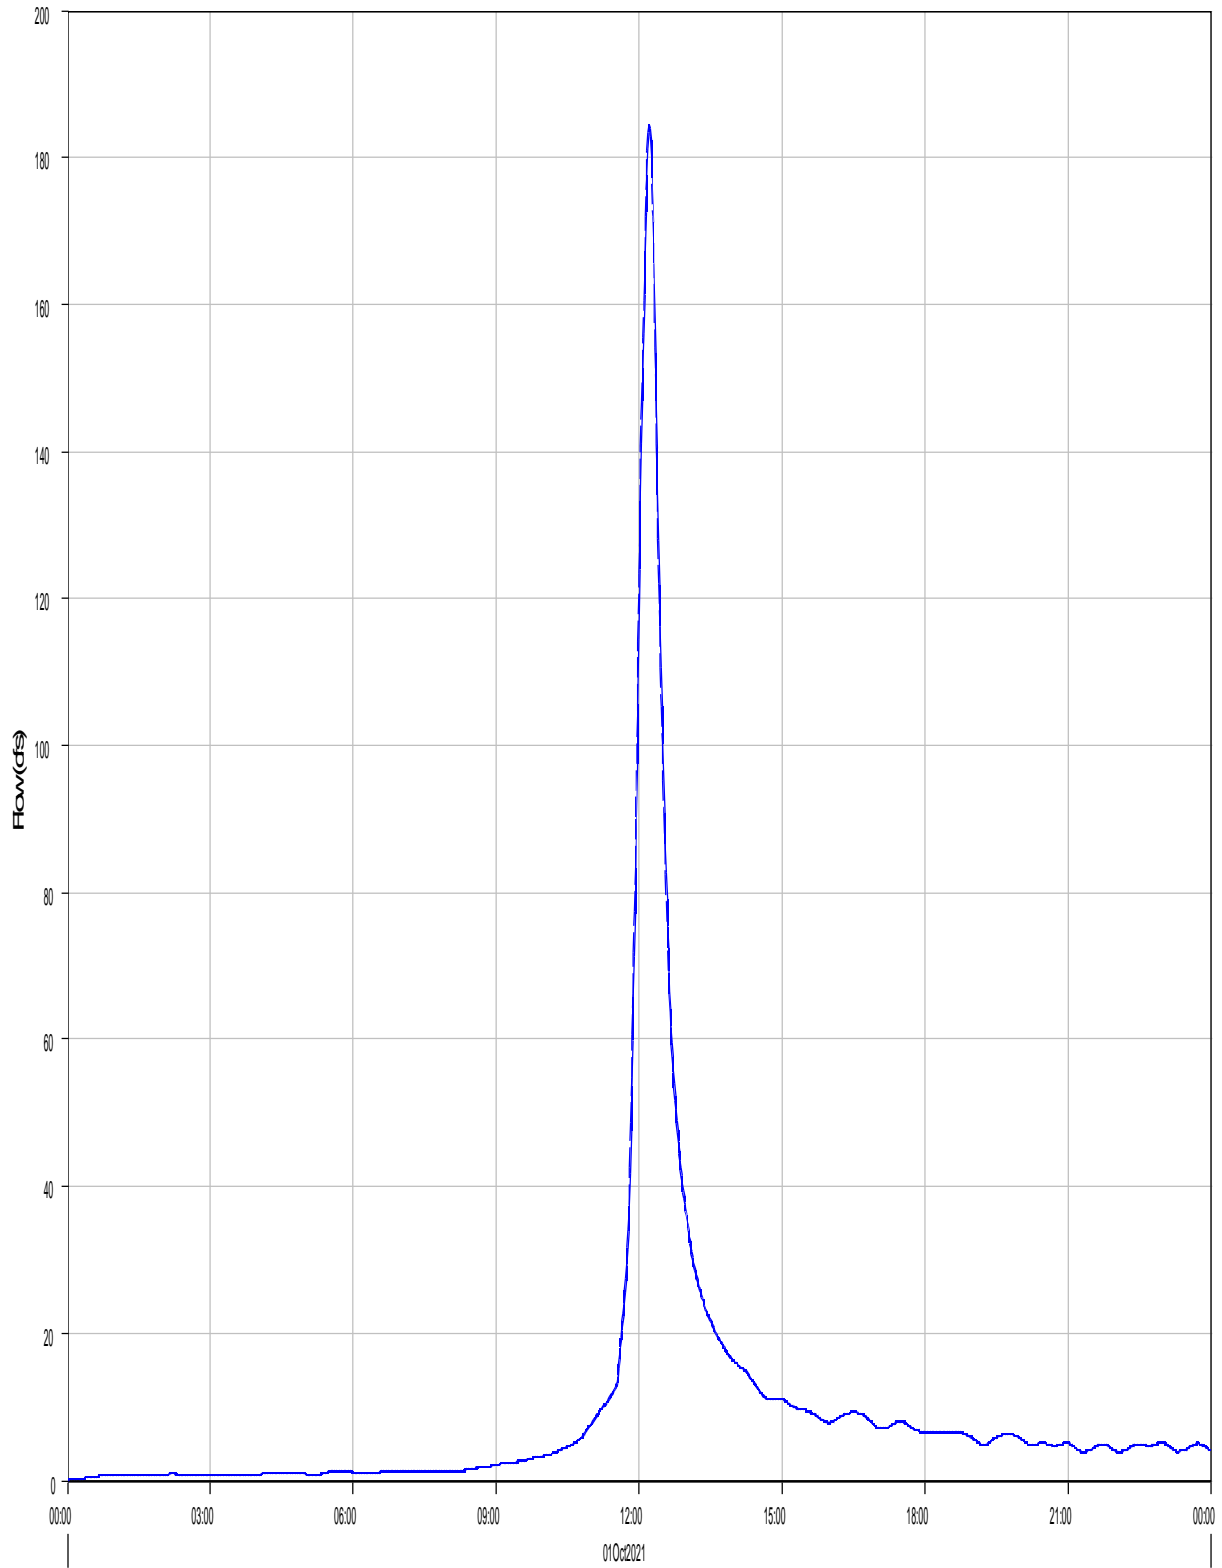

Run:EV 100-yr Pr. Type II Element:R-PB7-C Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB7-C Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB7-C


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	184.6 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:12
Peak Outflow :	184.4 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:13
Total Inflow :	19.8 (AC-FT)	Total Outflow :	19.8 (AC-FT)


Reach 'R-PB7-A' Results for Run 'EV 100-yr Pr. Type II'

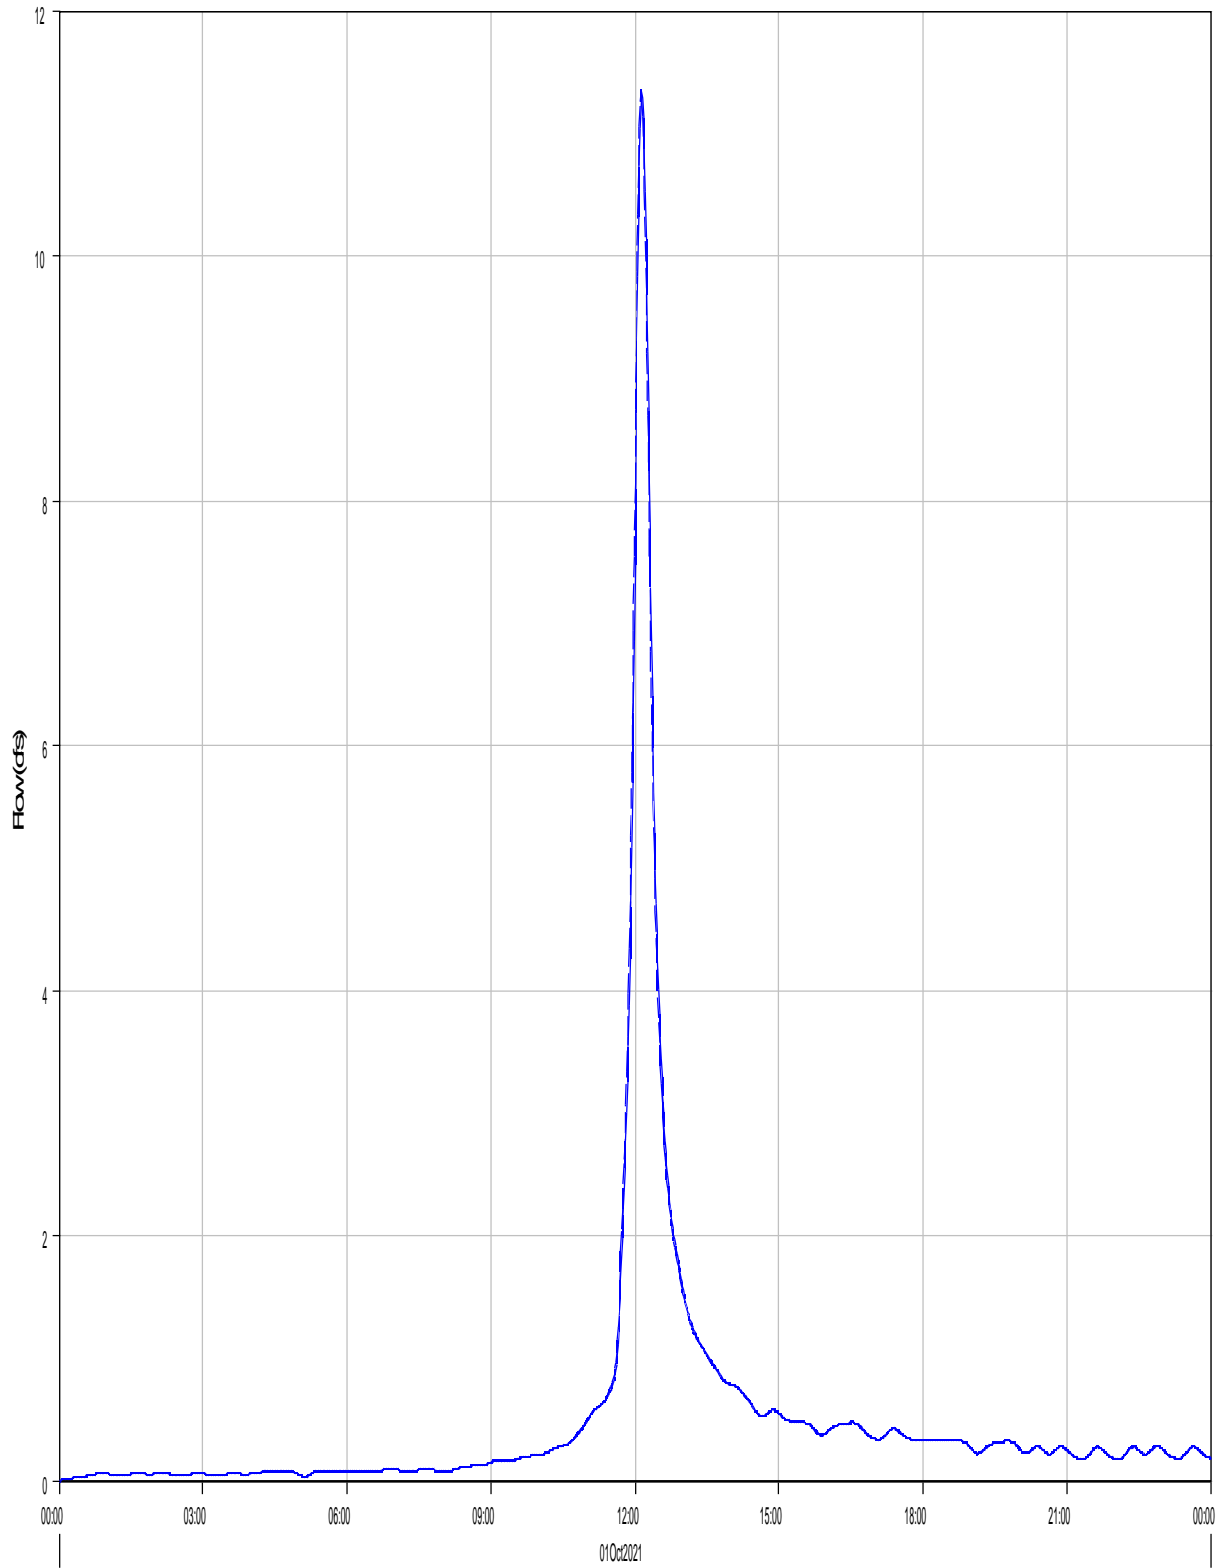

Run:EV 100-yr Pr. Type II Element:R-PB7-A Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB7-A Result:Combined Inflow

Reach 'R-PB9' Results for Run 'EV 100-yr Pr. Type II'

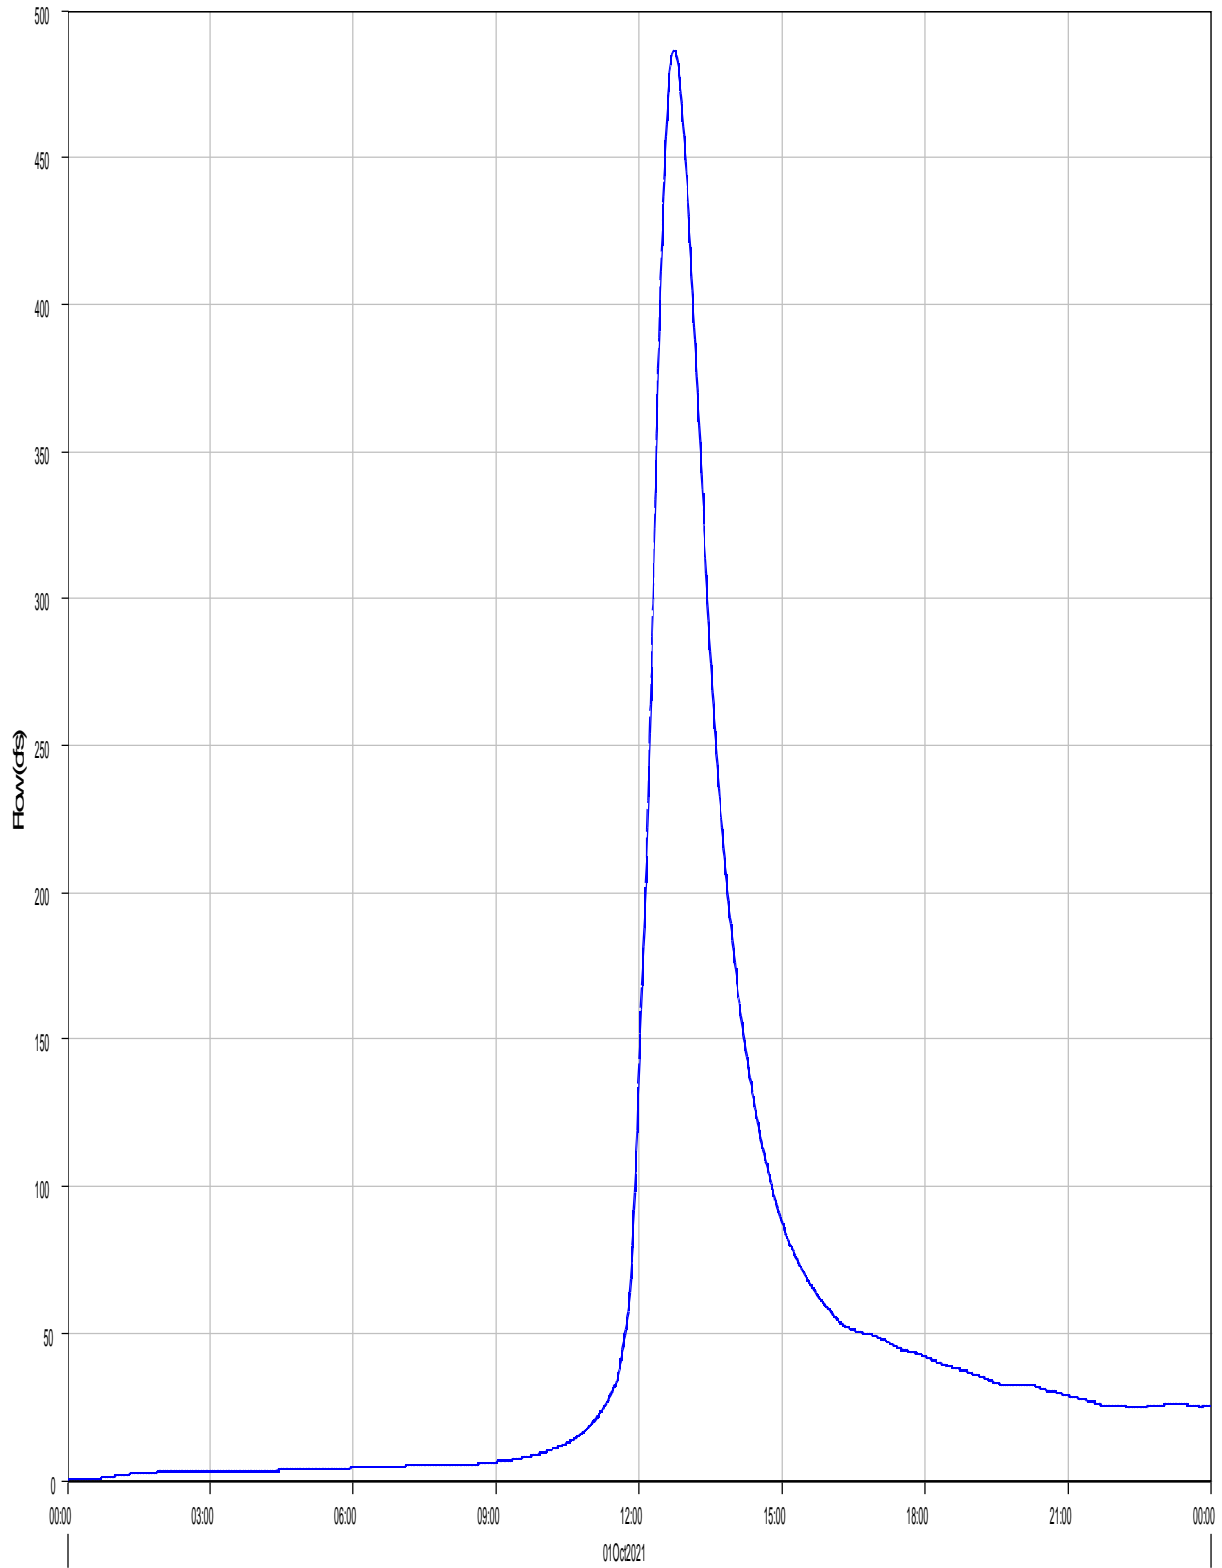

Run:EV 100-yr Pr. Type II Element:R-PB9 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB9 Result:Combined Inflow


Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB9
Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	486.7 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:44
Peak Outflow :	486.6 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:44
Total Inflow :	102.2 (AC-FT)	Total Outflow :	102.2 (AC-FT)

Reach 'R-PB10' Results for Run 'EV 100-yr Pr. Type II'

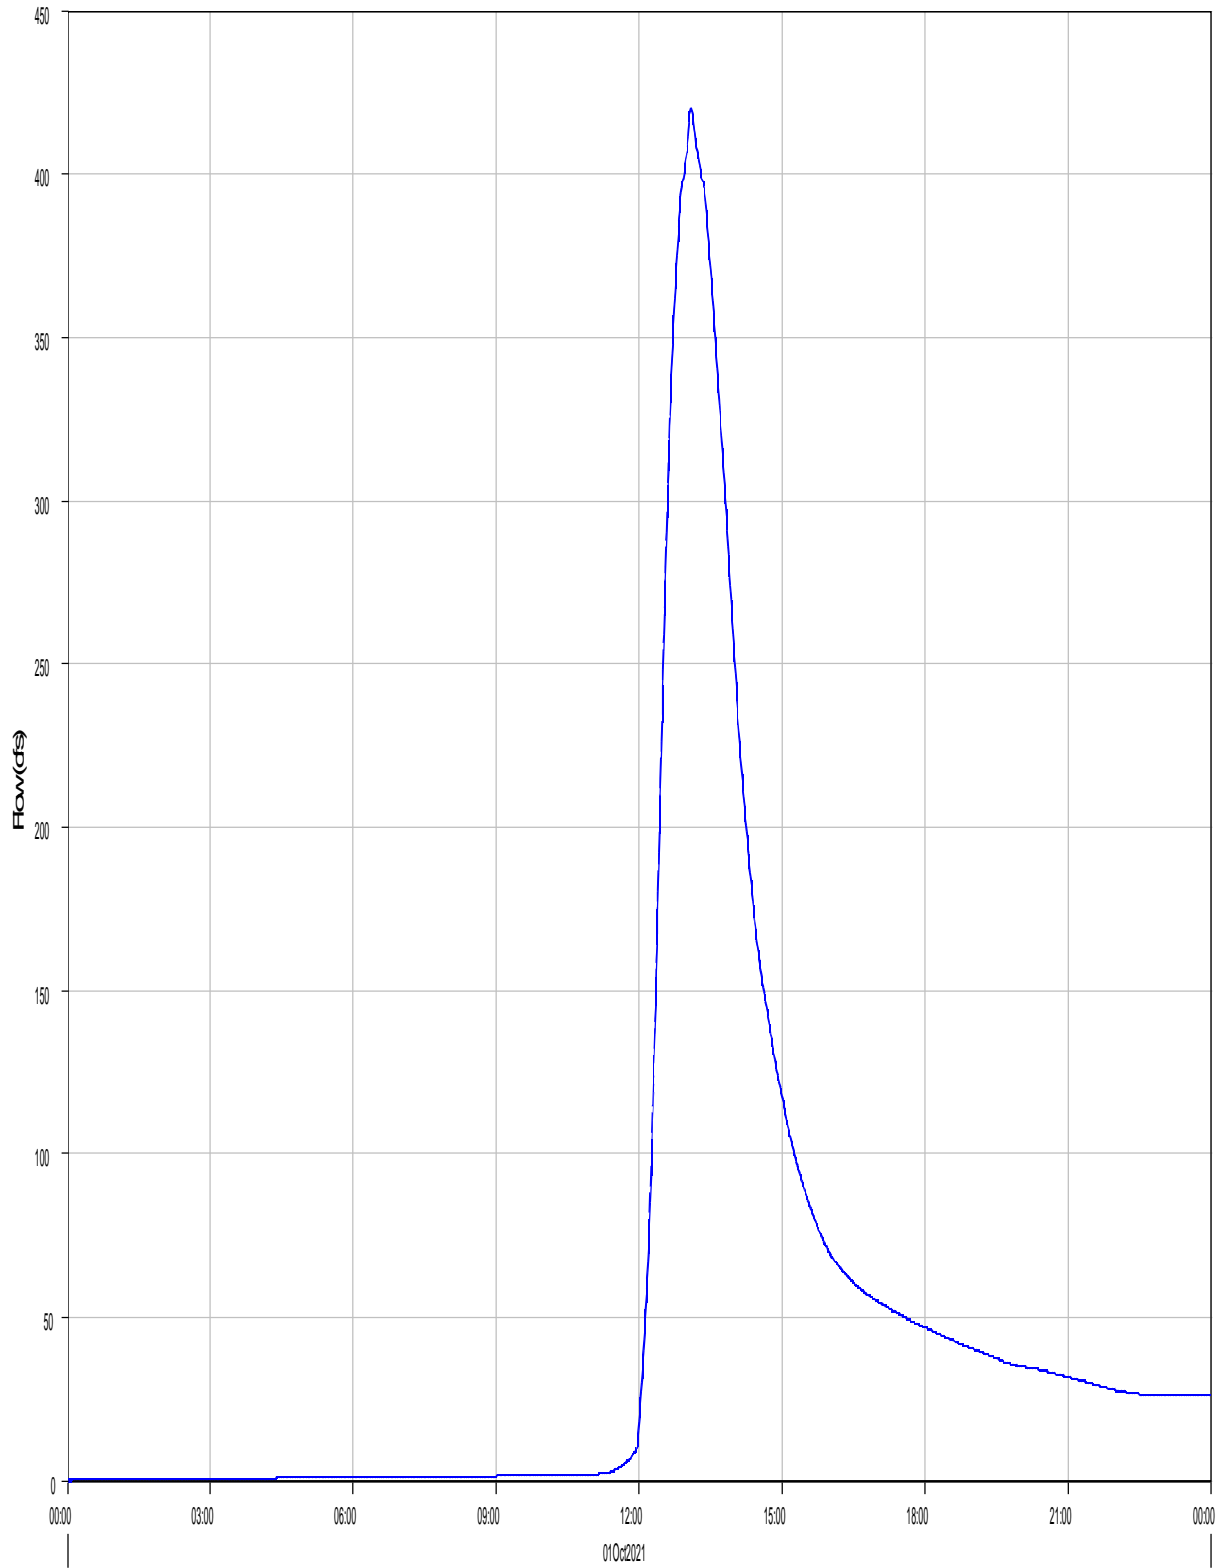

Run:EV 100-yr Pr. Type II Element:R-PB10 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB10 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB10


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	420.1 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 13:05
Peak Outflow :	420.0 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:06
Total Inflow :	96.5 (AC-FT)	Total Outflow :	96.5 (AC-FT)

Reach 'R-PB11' Results for Run 'EV 100-yr Pr. Type II'

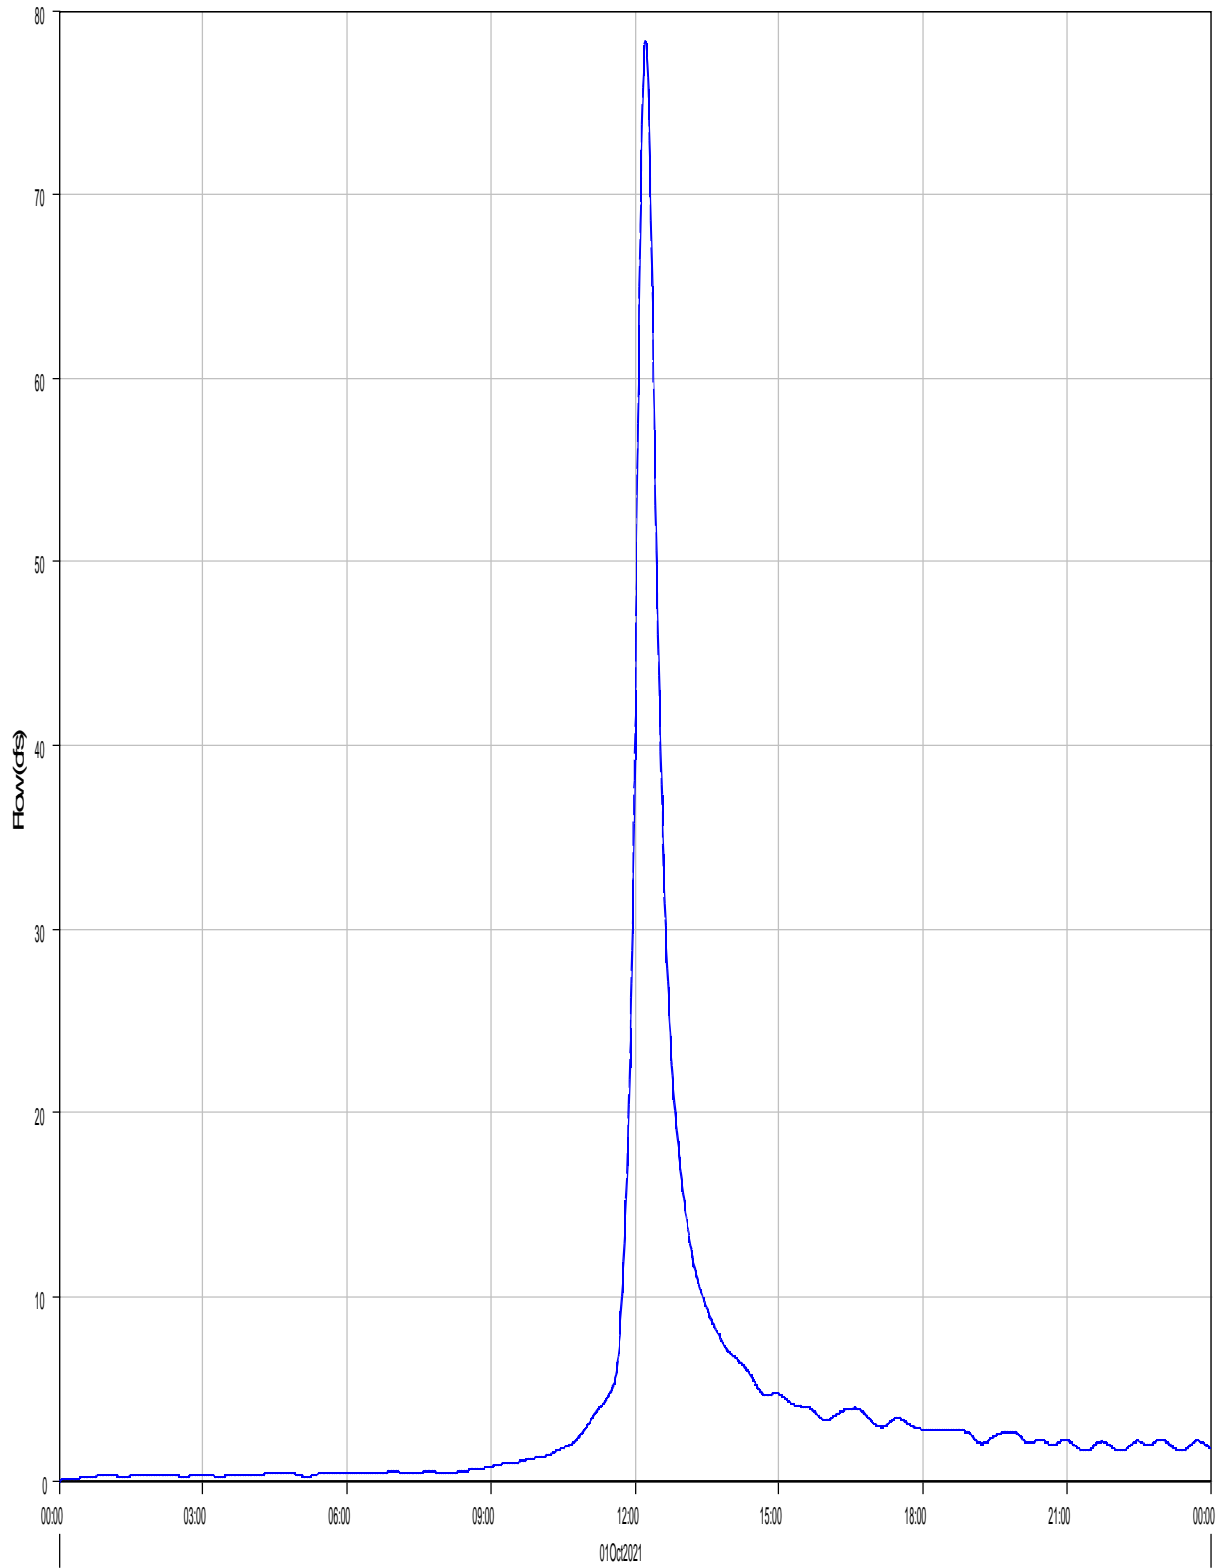

Run:EV 100-yr Pr. Type II Element:R-PB11 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB11 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB11


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	78.4 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:13
Peak Outflow :	78.3 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:14
Total Inflow :	8.2 (AC-FT)	Total Outflow :	8.2 (AC-FT)

Reach 'R-PB12-A' Results for Run 'EV 100-yr Pr. Type II'

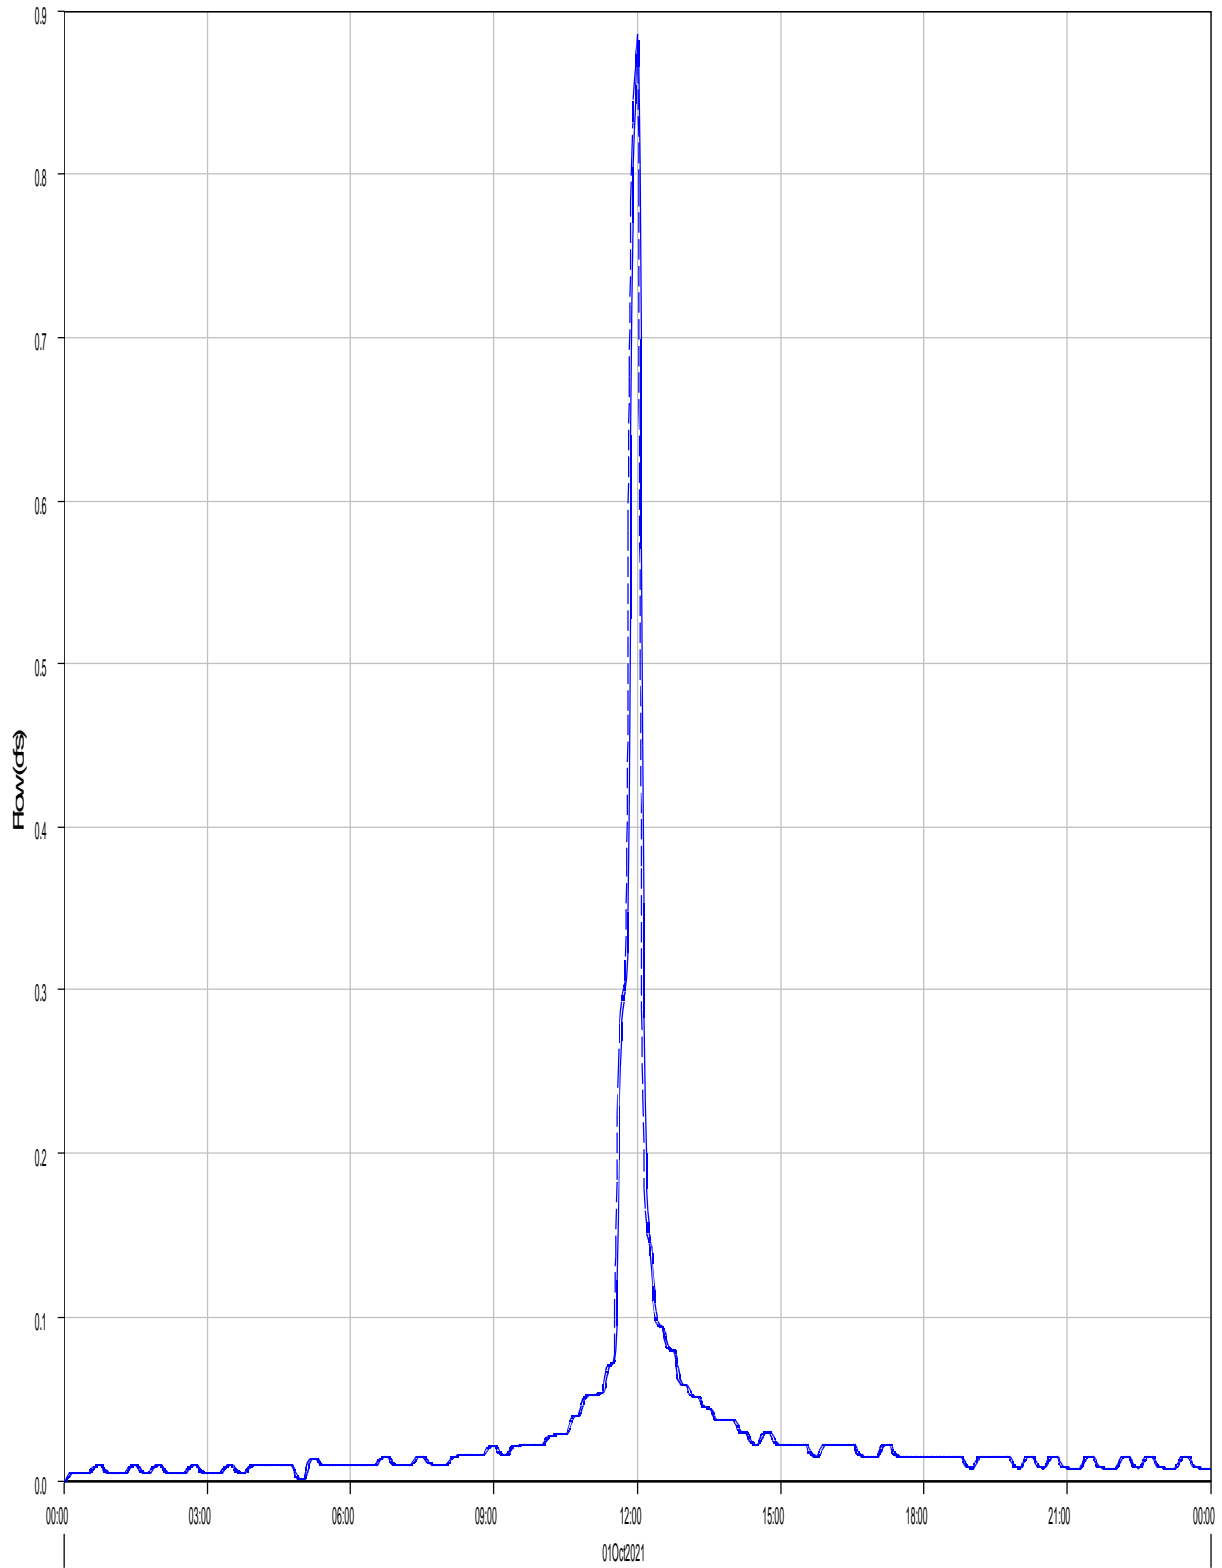

— Run:EV 100-yr Pr. Type II Element:R-PB12-A Result:Outflow

- - - Run:EV 100-yr Pr. Type II Element:R-PB12-A Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB12-A


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	0.9 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:00
Peak Outflow :	0.9 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:02
Total Inflow :	0.1 (AC-FT)	Total Outflow :	0.1 (AC-FT)

Reach 'R-PB12-B' Results for Run 'EV 100-yr Pr. Type II'

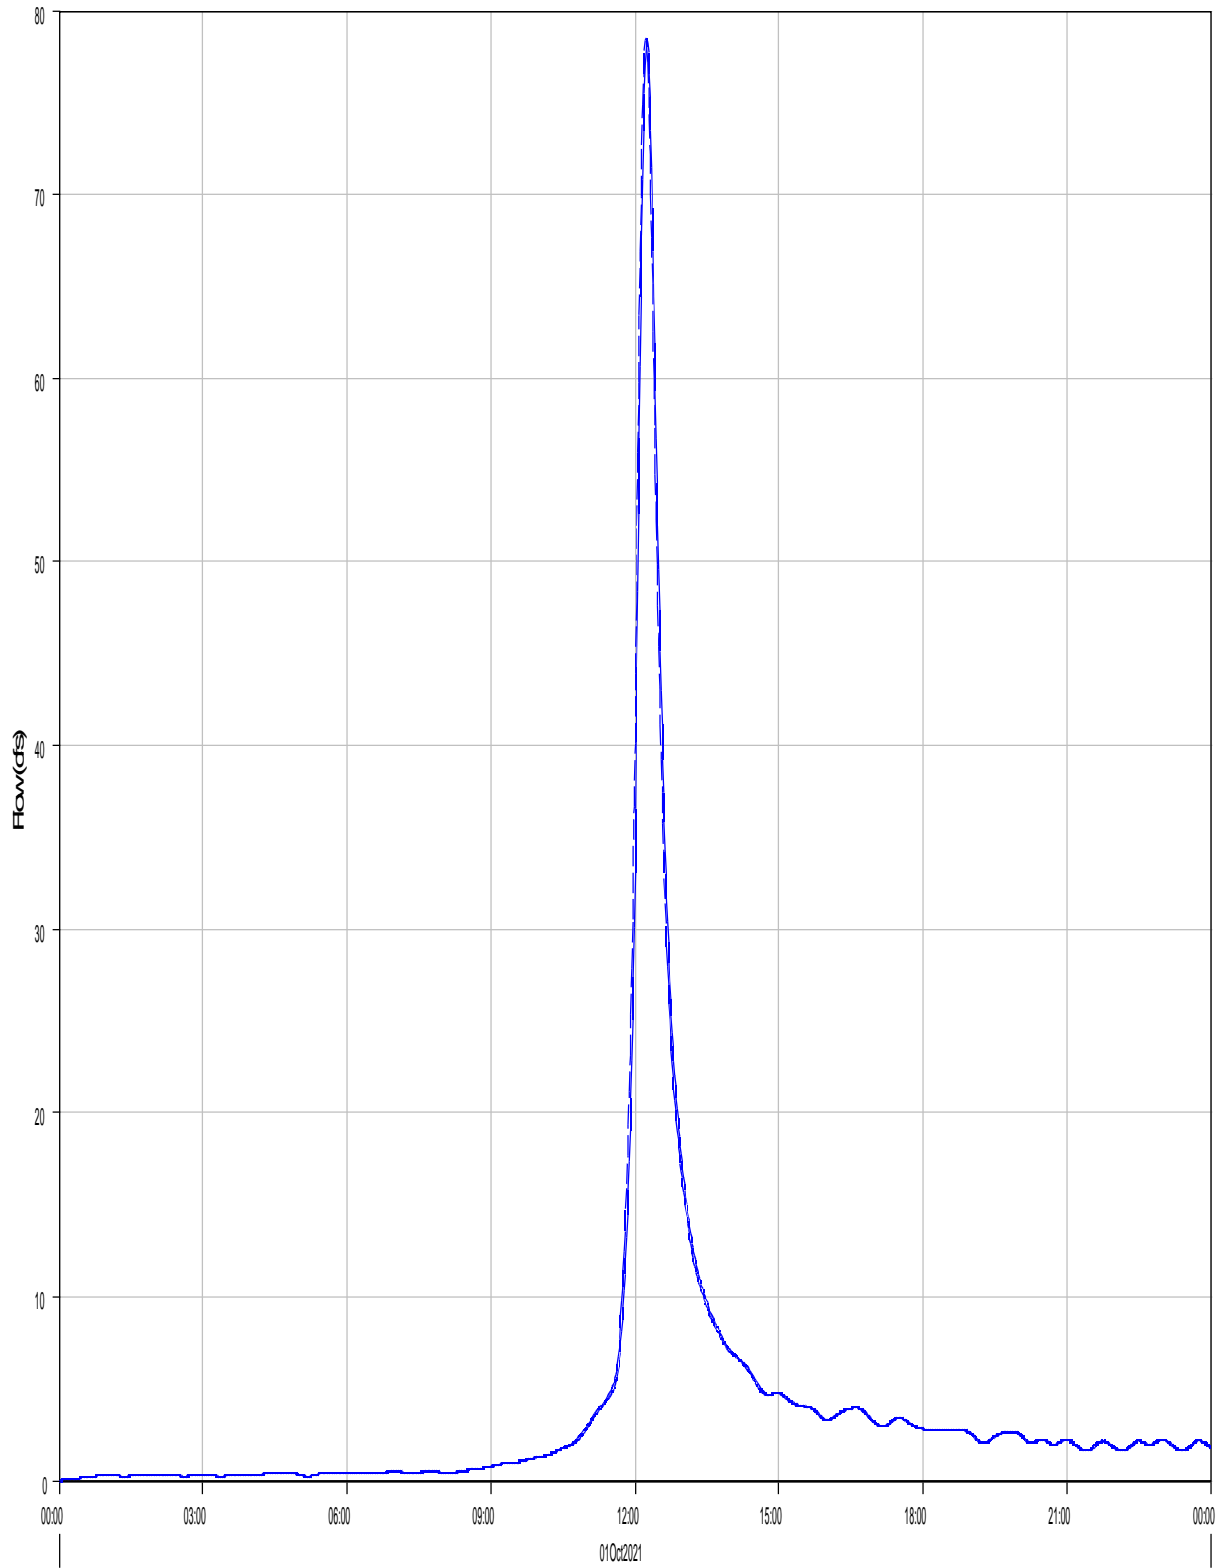

Run:EV 100-yr Pr. Type II Element:R-PB12-B Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB12-B Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB12-B


Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	78.5 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 12:14
Peak Outflow :	78.4 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 12:15
Total Inflow :	8.2 (AC-FT)	Total Outflow :	8.2 (AC-FT)

Reach 'R-PB13' Results for Run 'EV 100-yr Pr. Type II'

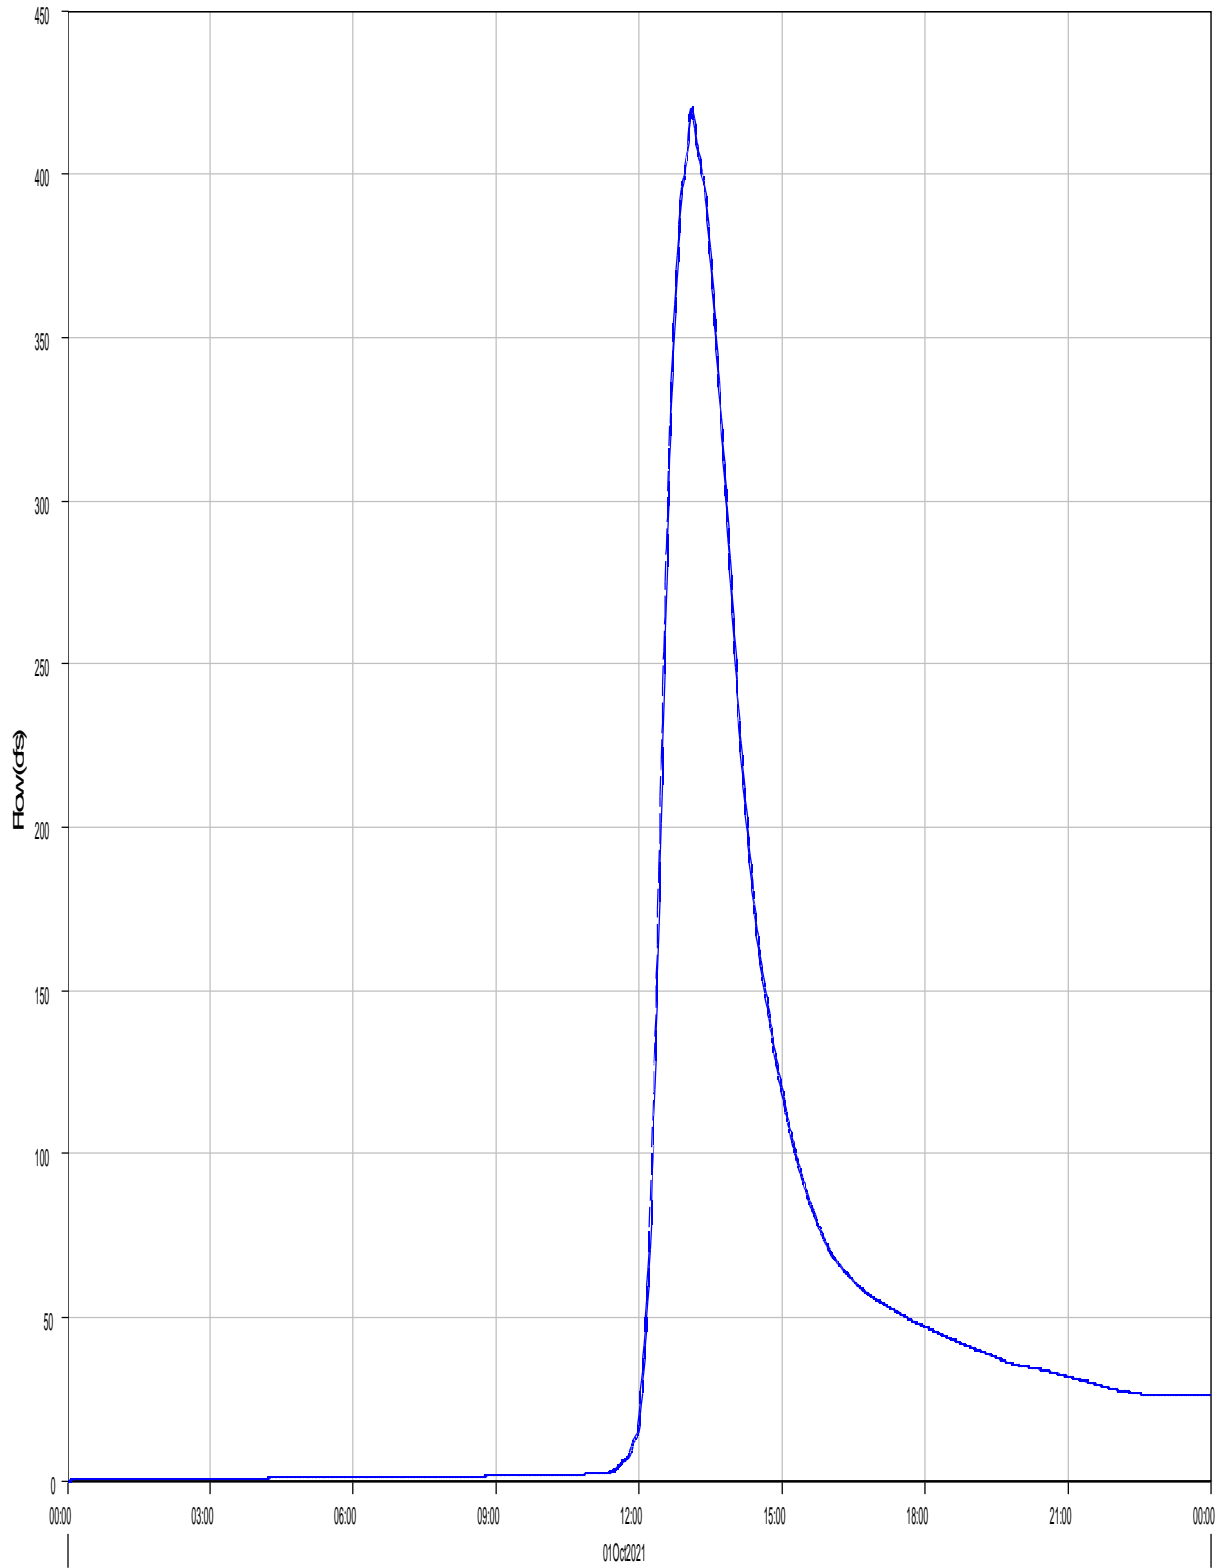

Run:EV 100-yr Pr. Type II Element:R-PB13 Result:Outflow

Run:EV 100-yr Pr. Type II Element:R-PB13 Result:Combined Inflow

Project: Eagleview_Subdivision
Simulation Run: EV 100-yr Pr. Type II Reach: R-PB13

Start of Run: 01Oct2021, 00:00 Basin Model: Eagleview_Proposed
End of Run: 02Oct2021, 00:00 Meteorologic Model: 100-yr Type II
Compute Time: 15Mar2022, 09:38:27 Control Specifications: 24-hr Storm

Volume Units: AC-FT

Computed Results

Peak Inflow :	420.3 (CFS)	Date/Time of Peak Inflow :	01Oct2021, 13:06
Peak Outflow :	420.1 (CFS)	Date/Time of Peak Outflow :	01Oct2021, 13:07
Total Inflow :	96.8 (AC-FT)	Total Outflow :	96.7 (AC-FT)

Typical Channel

Project Description	
Friction Method	Manning Formula
Solve For	Discharge
Input Data	
Roughness Coefficient	0.030
Channel Slope	0.025 ft/ft
Normal Depth	24.0 in
Left Side Slope	1.300 H:V
Right Side Slope	1.300 H:V
Results	
Discharge	34.88 cfs
Flow Area	5.2 ft ²
Wetted Perimeter	6.6 ft
Hydraulic Radius	9.5 in
Top Width	5.20 ft
Critical Depth	25.7 in
Critical Slope	0.017 ft/ft
Velocity	6.71 ft/s
Velocity Head	0.70 ft
Specific Energy	2.70 ft
Froude Number	1.183
Flow Type	Supercritical
GVF Input Data	
Downstream Depth	0.0 in
Length	0.0 ft
Number Of Steps	0
GVF Output Data	
Upstream Depth	0.0 in
Profile Description	N/A
Profile Headloss	0.00 ft
Downstream Velocity	Infinity ft/s
Upstream Velocity	Infinity ft/s
Normal Depth	24.0 in
Critical Depth	25.7 in
Channel Slope	0.025 ft/ft
Critical Slope	0.017 ft/ft

Worksheet for Typical Ditch



Project Description	
Friction Method	Manning Formula
Solve For	Discharge
Input Data	
Roughness Coefficient	0.030
Channel Slope	0.025 ft/ft
Normal Depth	18.0 in
Left Side Slope	4.000 H:V
Right Side Slope	4.000 H:V
Results	
Discharge	57.02 cfs
Flow Area	9.0 ft ²
Wetted Perimeter	12.4 ft
Hydraulic Radius	8.7 in
Top Width	12.00 ft
Critical Depth	19.9 in
Critical Slope	0.015 ft/ft
Velocity	6.34 ft/s
Velocity Head	0.62 ft
Specific Energy	2.12 ft
Froude Number	1.290
Flow Type	Supercritical
GVF Input Data	
Downstream Depth	0.0 in
Length	0.0 ft
Number Of Steps	0
GVF Output Data	
Upstream Depth	0.0 in
Profile Description	N/A
Profile Headloss	0.00 ft
Downstream Velocity	Infinity ft/s
Upstream Velocity	Infinity ft/s
Normal Depth	18.0 in
Critical Depth	19.9 in
Channel Slope	0.025 ft/ft
Critical Slope	0.015 ft/ft

APPENDIX C: HYDRAULICS

EAGLEVIEW SUBDIVISION - PRELIMINARY CULVERT SIZING					
Culvert	Peak Flow (Q ₅ , cfs)	Maximum HW/D at Q ₅	Peak Flow (Q100, cfs)	Culvert Size/Material	Barrels
1	1.5	1.5	3.3	18" RCP	1
2	57.9	1.5	150.1	36" RCP	2
3	13.2	1.5	31.9	24" RCP	2
4	4.7	1.5	11.3	18" RCP	1
5	0.5	1.5	0.9	18" RCP	1
6	29.8	1.5	78.4	36" RCP	2
7	36.8	1.5	95.9	36" RCP	2
8	131.8	1.5	420.3	72" RCP	2

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.04 (February 2021)

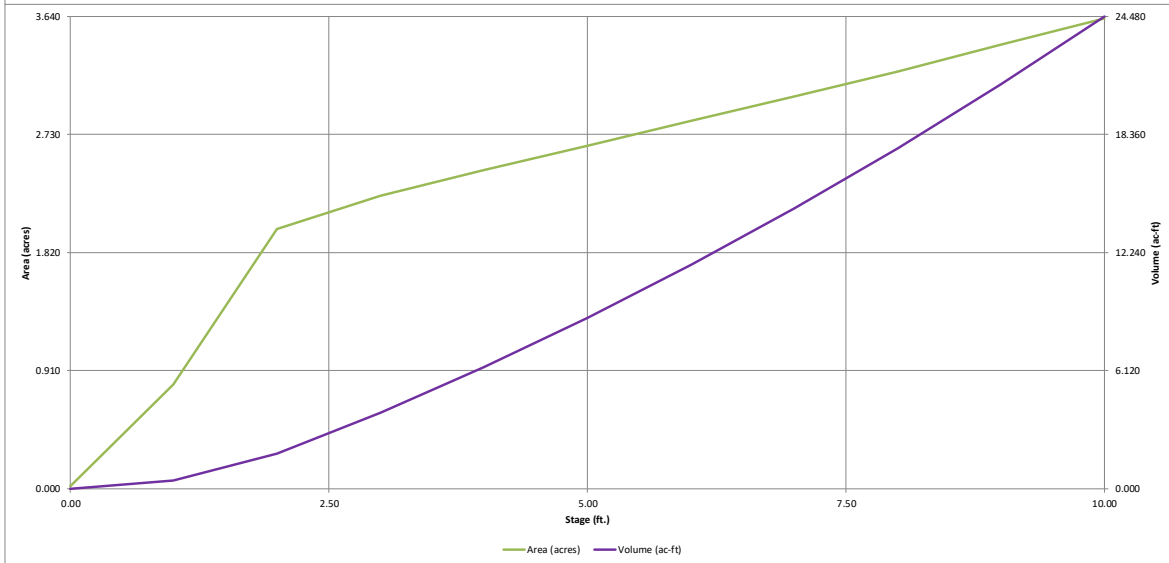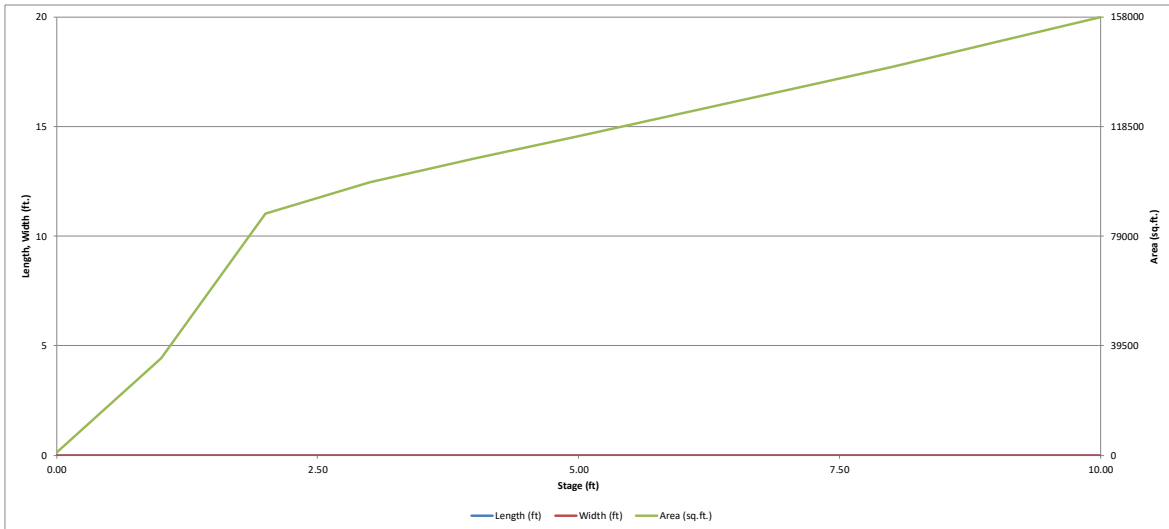


DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.04 (February 2021)

Project: **Eagleview**

Basin ID: **Sub Regional Pond 1 (Actual Area draining to the pond)**

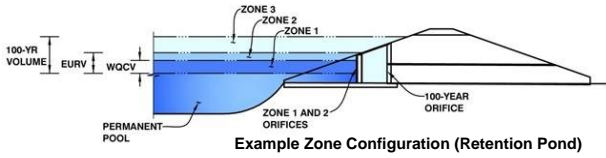

	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	2.75	3.388	Orifice Plate
Zone 2 (100-year)	9.94	20.852	Weir&Pipe (Restrict)
Zone 3			
Total (all zones)		24.239	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =	N/A	ft (distance below the filtration media surface)
Underdrain Orifice Diameter =	N/A	inches

Calculated Parameters for Underdrain		
Underdrain Orifice Area =	N/A	ft ²
Underdrain Orifice Centroid =	N/A	feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =	0.00	ft (relative to basin bottom at Stage = 0 ft)
Depth at top of Zone using Orifice Plate =	2.98	ft (relative to basin bottom at Stage = 0 ft)
Orifice Plate: Orifice Vertical Spacing =	9.40	inches
Orifice Plate: Orifice Area per Row =	16.27	sq. inches (use rectangular openings)

Calculated Parameters for Plate		
WQ Orifice Area per Row =	1.130E-01	ft ²
Elliptical Half-Width =	N/A	feet
Elliptical Slot Centroid =	N/A	feet
Elliptical Slot Area =	N/A	ft ²

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	0.99	1.99					
Orifice Area (sq. inches)	16.27	16.27	16.27					

	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

	Not Selected	Not Selected	
Invert of Vertical Orifice =			ft (relative to basin bottom at Stage = 0 ft)
Depth at top of Zone using Vertical Orifice =			ft (relative to basin bottom at Stage = 0 ft)
Vertical Orifice Diameter =			inches

Calculated Parameters for Vertical Orifice		
Vertical Orifice Area =		ft ²
Vertical Orifice Centroid =		feet

User Input: Overflow Weir (Dropbox with Flat or Sloped Gate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))

	Zone 2 Weir	Not Selected	
Overflow Weir Front Edge Height, H _o =	3.00		ft (relative to basin bottom at Stage = 0 ft)
Overflow Weir Front Edge Length =	30.00		feet
Overflow Weir Gate Slope =	4.00		H:V
Horiz. Length of Weir Sides =	32.00		feet
Overflow Gate Type =	Type C Gate		
Debris Clogging % =	50%		%

Calculated Parameters for Overflow Weir		
Height of Gate Upper Edge, H ₁ =	11.00	feet
Overflow Weir Slope Length =	32.98	feet
Gate Open Area / 100-yr Orifice Area =	14.63	
Overflow Gate Open Area w/o Debris =	688.72	ft ²
Overflow Gate Open Area w/ Debris =	344.36	ft ²

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

	Zone 2 Restrictor	Not Selected	
Depth to Invert of Outlet Pipe =	0.00		ft (distance below basin bottom at Stage = 0 ft)
Outlet Pipe Diameter =	96.00		inches
Restrictor Plate Height Above Pipe Invert =	85.00		inches

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate		
Outlet Orifice Area =	47.07	ft ²
Outlet Orifice Centroid =	3.77	feet
Half-Central Angle of Restrictor Plate on Pipe =	2.45	N/A radians

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage =	9.80	ft (relative to basin bottom at Stage = 0 ft)
Spillway Crest Length =	254.00	feet
Spillway End Slopes =	4.00	H:V
Freeboard above Max Water Surface =	1.00	feet

Calculated Parameters for Spillway		
Spillway Design Flow Depth =	0.99	feet
Stage at Top of Freeboard =	11.79	feet
Basin Area at Top of Freeboard =	3.63	acres
Basin Volume at Top of Freeboard =	24.48	acre-ft




Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
Design Storm Return Period =									
One-Hour Rainfall Depth (in) =	N/A	N/A	1.19	1.50	1.75	2.00	2.25	2.52	3.14
CUHP Runoff Volume (acre-ft) =	3.388	5.462	8.651	20.007	31.468	52.314	66.342	86.725	123.614
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	8.651	20.007	31.468	52.314	66.342	86.725	123.614
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A	54.6	154.6	241.8	446.5	562.6	726.3	1020.0
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A	N/A							
Predevelopment Unit Peak Flow, q (cfs/acre) =	N/A	N/A	0.08	0.21	0.34	0.62	0.78	1.01	1.42
Peak Inflow Q (cfs) =	N/A	N/A	81.5	185.6	273.2	477.5	594.5	761.4	1056.7
Peak Outflow Q (cfs) =	2.1	16.3	23.6	97.1	176.1	350.3	460.3	548.1	634.2
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A	0.6	0.7	0.8	0.8	0.8	0.6
Structure Controlling Flow =	Plate	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	N/A
Max Velocity through Grate 1 (fps) =	N/A	0.02	0.03	0.1	0.2	0.5	0.7	0.8	0.8
Max Velocity through Grate 2 (fps) =	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours) =	35	39	40	34	30	24	20	16	9
Time to Drain 99% of Inflow Volume (hours) =	37	43	45	42	40	36	34	31	28
Maximum Ponding Depth (ft) =	2.75	3.66	3.82	5.08	5.96	7.39	8.10	9.61	10.00
Area at Maximum Ponding Depth (acres) =	2.19	2.39	2.42	2.66	2.83	3.10	3.23	3.55	3.63
Maximum Volume Stored (acre-ft) =	3.390	5.480	5.865	9.039	11.478	15.682	17.928	23.080	24.479

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.04 (February 2021)

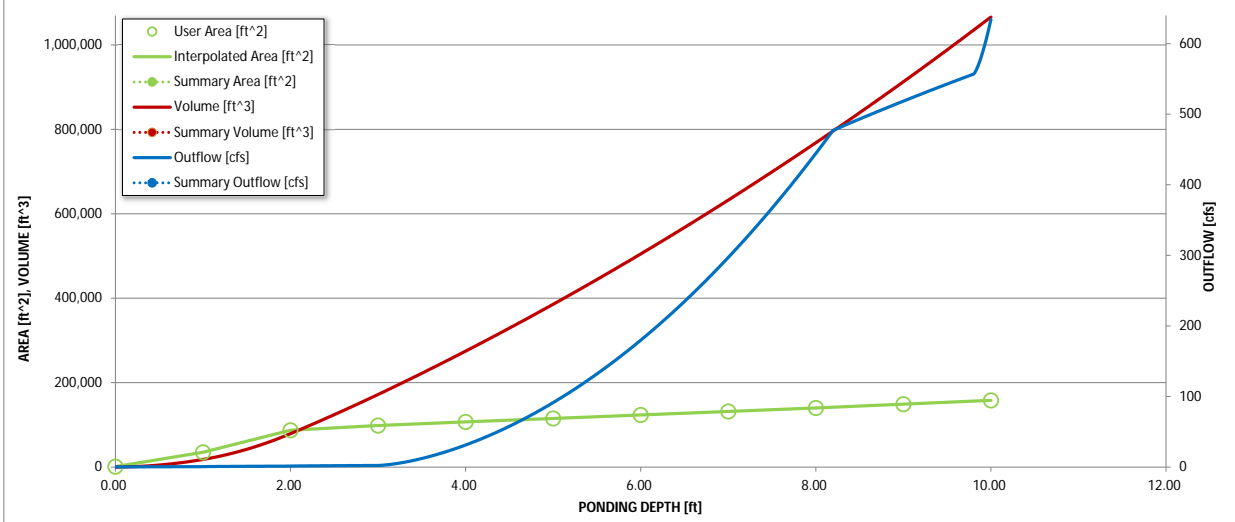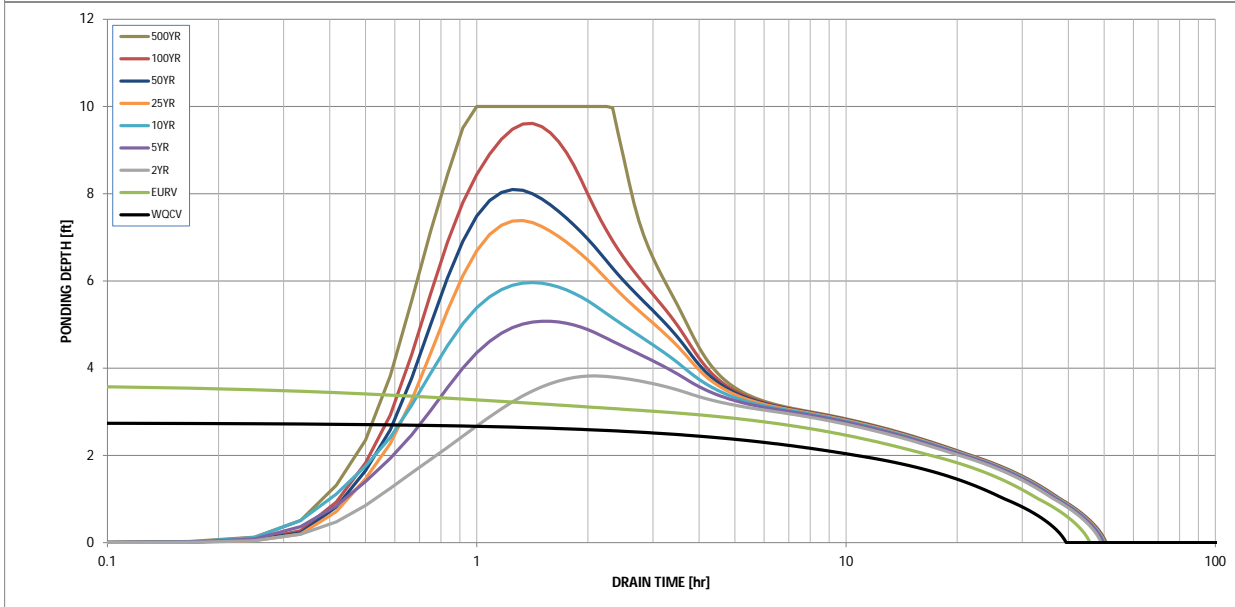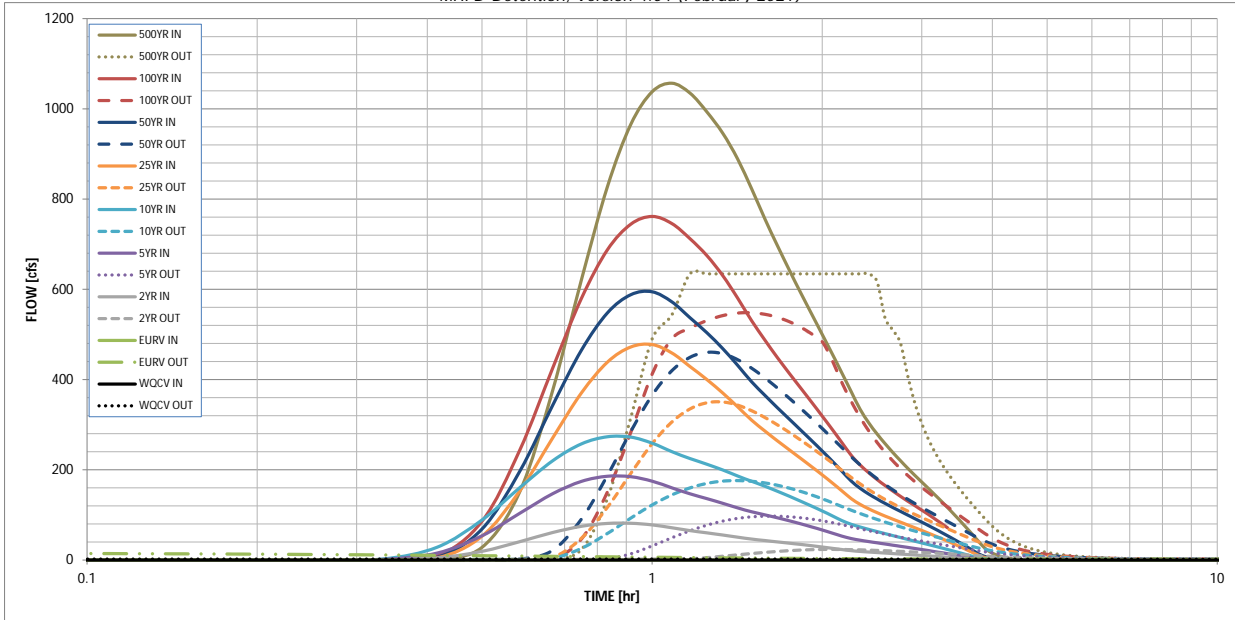

S-A-V-D Chart Axis Override X-axis Left Y-Axis Right Y-Axis
 minimum bound

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: _____

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.


Time Interval	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.04
	0:15:00	0.00	0.00	0.10	0.16	0.20	0.13	0.19	0.17	0.31
	0:20:00	0.00	0.00	0.53	1.34	2.31	0.60	0.75	0.78	2.35
	0:25:00	0.00	0.00	4.80	15.49	28.52	4.71	6.14	9.14	28.12
	0:30:00	0.00	0.00	19.22	53.69	88.79	52.74	68.74	85.87	151.65
	0:35:00	0.00	0.00	40.74	103.72	160.54	153.40	197.00	243.84	375.80
	0:40:00	0.00	0.00	60.96	146.92	219.95	270.56	342.88	425.15	621.87
	0:45:00	0.00	0.00	74.80	174.36	257.51	370.61	465.53	580.40	827.08
	0:50:00	0.00	0.00	81.18	185.62	273.22	438.50	547.60	687.33	965.47
	0:55:00	0.00	0.00	81.55	184.65	272.44	472.24	588.08	744.28	1037.74
	1:00:00	0.00	0.00	77.87	174.82	259.10	477.53	594.54	761.41	1056.70
	1:05:00	0.00	0.00	71.57	160.02	240.29	459.01	572.32	745.88	1034.92
	1:10:00	0.00	0.00	65.23	146.73	224.93	428.94	537.09	712.23	993.16
	1:15:00	0.00	0.00	60.20	136.09	212.37	399.88	503.68	674.77	946.08
	1:20:00	0.00	0.00	55.38	125.72	199.59	370.21	468.65	630.52	888.91
	1:25:00	0.00	0.00	50.63	115.54	186.23	339.64	431.56	580.52	822.69
	1:30:00	0.00	0.00	46.40	106.96	174.50	309.98	395.03	530.33	755.80
	1:35:00	0.00	0.00	43.13	100.13	163.50	285.82	364.97	487.32	696.50
	1:40:00	0.00	0.00	40.14	93.53	152.33	264.02	337.41	448.44	641.78
	1:45:00	0.00	0.00	37.29	86.88	141.16	243.93	311.84	413.13	591.44
	1:50:00	0.00	0.00	34.49	80.12	130.17	224.91	287.61	380.62	544.73
	1:55:00	0.00	0.00	31.69	73.34	119.38	206.63	264.37	349.36	500.01
	2:00:00	0.00	0.00	28.87	66.54	108.74	188.66	241.62	319.02	456.84
	2:05:00	0.00	0.00	26.04	59.74	98.05	170.93	219.19	289.46	414.68
	2:10:00	0.00	0.00	23.20	53.01	87.45	153.39	196.93	260.44	373.28
	2:15:00	0.00	0.00	20.70	47.60	79.27	136.17	175.09	232.13	334.25
	2:20:00	0.00	0.00	19.00	43.95	73.24	123.40	159.07	210.68	304.27
	2:25:00	0.00	0.00	17.69	40.93	67.98	113.42	146.31	193.53	279.70
	2:30:00	0.00	0.00	16.51	38.16	63.11	105.03	135.41	178.59	258.00
	2:35:00	0.00	0.00	15.38	35.50	58.53	97.43	125.47	165.16	238.36
	2:40:00	0.00	0.00	14.28	32.94	54.11	90.54	116.44	152.85	220.30
	2:45:00	0.00	0.00	13.21	30.44	49.84	83.97	107.85	141.33	203.41
	2:50:00	0.00	0.00	12.17	27.99	45.72	77.63	99.62	130.55	187.60
	2:55:00	0.00	0.00	11.16	25.58	41.74	71.53	91.74	120.51	172.90
	3:00:00	0.00	0.00	10.15	23.22	37.91	65.52	84.01	110.61	158.51
	3:05:00	0.00	0.00	9.15	20.89	34.21	59.56	76.40	100.78	144.38
	3:10:00	0.00	0.00	8.16	18.58	30.56	53.62	68.83	90.96	130.28
	3:15:00	0.00	0.00	7.17	16.29	26.93	47.71	61.29	81.15	116.22
	3:20:00	0.00	0.00	6.18	14.02	23.32	41.81	53.77	71.36	102.18
	3:25:00	0.00	0.00	5.20	11.76	19.73	35.92	46.26	61.57	88.16
	3:30:00	0.00	0.00	4.22	9.51	16.16	30.03	38.77	51.80	74.18
	3:35:00	0.00	0.00	3.25	7.26	12.60	24.15	31.29	42.04	60.23
	3:40:00	0.00	0.00	2.28	5.04	9.10	18.29	23.84	32.31	46.34
	3:45:00	0.00	0.00	1.37	3.01	6.00	12.49	16.49	22.73	32.95
	3:50:00	0.00	0.00	0.72	1.77	4.21	7.47	10.20	14.51	21.98
	3:55:00	0.00	0.00	0.49	1.29	3.27	4.67	6.72	9.62	15.19
	4:00:00	0.00	0.00	0.37	1.00	2.58	2.99	4.53	6.45	10.61
	4:05:00	0.00	0.00	0.30	0.79	2.04	1.94	3.09	4.21	7.27
	4:10:00	0.00	0.00	0.23	0.62	1.60	1.23	2.07	2.63	4.82
	4:15:00	0.00	0.00	0.18	0.48	1.22	0.82	1.42	1.53	3.05
	4:20:00	0.00	0.00	0.14	0.37	0.89	0.51	0.94	0.80	1.80
	4:25:00	0.00	0.00	0.11	0.27	0.63	0.33	0.62	0.42	1.08
	4:30:00	0.00	0.00	0.09	0.20	0.43	0.24	0.45	0.32	0.77
	4:35:00	0.00	0.00	0.07	0.14	0.30	0.17	0.33	0.25	0.57
	4:40:00	0.00	0.00	0.06	0.10	0.23	0.13	0.25	0.20	0.45
	4:45:00	0.00	0.00	0.04	0.07	0.17	0.09	0.19	0.15	0.35
	4:50:00	0.00	0.00	0.03	0.04	0.12	0.07	0.14	0.11	0.26
	4:55:00	0.00	0.00	0.02	0.03	0.08	0.05	0.10	0.08	0.18
	5:00:00	0.00	0.00	0.01	0.02	0.05	0.03	0.06	0.05	0.12
	5:05:00	0.00	0.00	0.01	0.01	0.02	0.02	0.04	0.03	0.07
	5:10:00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.01	0.03
	5:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.01
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD- Detention, Version 4.04 (February 2021)

Project: **Eagleview**

Basin ID: **Onsite Sub Regional Pond 1 (Watershed Area adjusted to match HEC-HMS Peak Q inflow)**



Watershed Information

Selected BMP Type =	EDB
Watershed Area =	508.40 acres
Watershed Length =	9,000 ft
Watershed Length to Centroid =	4,500 ft
Watershed Slope =	0.030 ft/ft
Watershed Imperviousness =	8.20% percent
Percentage Hydrologic Soil Group A =	0.0% percent
Percentage Hydrologic Soil Group B =	100.0% percent
Percentage Hydrologic Soil Groups C/D =	0.0% percent
Target WQCV Drain Time =	40.0 hours
Location for 1-hr Rainfall Depths =	User Input

After providing required inputs above including 1-hour rainfall depths, click "Run CUHP" to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

Water Quality Capture Volume (WQCV) =	3.388	acre-feet	3.388	acre-feet
Excess Urban Runoff Volume (EURV) =	5.462	acre-feet	5.462	acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	6.108	acre-feet	1.19	inches
5-yr Runoff Volume (P1 = 1.5 in.) =	14.124	acre-feet	1.50	inches
10-yr Runoff Volume (P1 = 1.75 in.) =	22.214	acre-feet	1.75	inches
25-yr Runoff Volume (P1 = 2 in.) =	36.928	acre-feet	2.00	inches
50-yr Runoff Volume (P1 = 2.25 in.) =	46.830	acre-feet	2.25	inches
100-yr Runoff Volume (P1 = 2.52 in.) =	61.216	acre-feet	2.52	inches
500-yr Runoff Volume (P1 = 3.14 in.) =	87.253	acre-feet		inches
Approximate 2-yr Detention Volume =	2.411	acre-feet		
Approximate 5-yr Detention Volume =	3.847	acre-feet		
Approximate 10-yr Detention Volume =	8.751	acre-feet		
Approximate 25-yr Detention Volume =	12.599	acre-feet		
Approximate 50-yr Detention Volume =	13.097	acre-feet		
Approximate 100-yr Detention Volume =	17.116	acre-feet		

Optional User Overrides

3.388	acre-feet
5.462	acre-feet
1.19	inches
1.50	inches
1.75	inches
2.00	inches
2.25	inches
2.52	inches
	inches



Define Zones and Basin Geometry

Zone 1 Volume (WQCV) =	3.388	acre-feet
Zone 2 Volume (EURV - Zone 1) =	2.074	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	11.654	acre-feet
Total Detention Basin Volume =	17.116	acre-feet
Initial Surcharge Volume (ISV) =	user	ft ³
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H _{total}) =	user	ft
Depth of Trickle Channel (H _{TC}) =	user	ft
Slope of Trickle Channel (S _{TC}) =	user	ft/ft
Slopes of Main Basin Sides (S _{main}) =	user	H:V
Basin Length-to-Width Ratio (R _{L/W}) =	user	
Initial Surcharge Area (A _{ISV}) =	user	ft ²
Surcharge Volume Length (L _{ISV}) =	user	ft
Surcharge Volume Width (W _{ISV}) =	user	ft
Depth of Basin Floor (H _{FLOOR}) =	user	ft
Length of Basin Floor (L _{FLOOR}) =	user	ft
Width of Basin Floor (W _{FLOOR}) =	user	ft
Area of Basin Floor (A _{FLOOR}) =	user	ft ²
Volume of Basin Floor (V _{FLOOR}) =	user	ft ³
Depth of Main Basin (H _{MAN}) =	user	ft
Length of Main Basin (L _{MAN}) =	user	ft
Width of Main Basin (W _{MAN}) =	user	ft
Area of Main Basin (A _{MAN}) =	user	ft ²
Volume of Main Basin (V _{MAN}) =	user	ft ³
Calculated Total Basin Volume (V _{total}) =	user	acre-feet

Stage - Storage Description	Stage (ft)	Optional Override Stage (ft)	Length (ft)	Width (ft)	Area (ft ²)	Optional Override Area (ft ²)	Area (acre)	Volume (ft ³)	Volume (ac-ft)
Top of Micropool	--	0.00	--	--	--	1,000	0.023		
	--	1.00	--	--	--	35,000	0.803	17,999	0.413
	--	2.00	--	--	--	87,200	2.002	79,099	1.816
	--	3.00	--	--	--	98,400	2.259	171,899	3.946
	--	4.00	--	--	--	107,000	2.456	274,599	6.304
	--	5.00	--	--	--	115,100	2.642	385,649	8.853
	--	6.00	--	--	--	123,400	2.833	504,899	11.591
	--	7.00	--	--	--	131,700	3.023	632,449	14.519
	--	8.00	--	--	--	140,000	3.214	768,299	17.638
	--	9.00	--	--	--	149,000	3.421	912,799	20.955
	--	10.00	--	--	--	158,000	3.627	1,066,299	24.479

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.04 (February 2021)

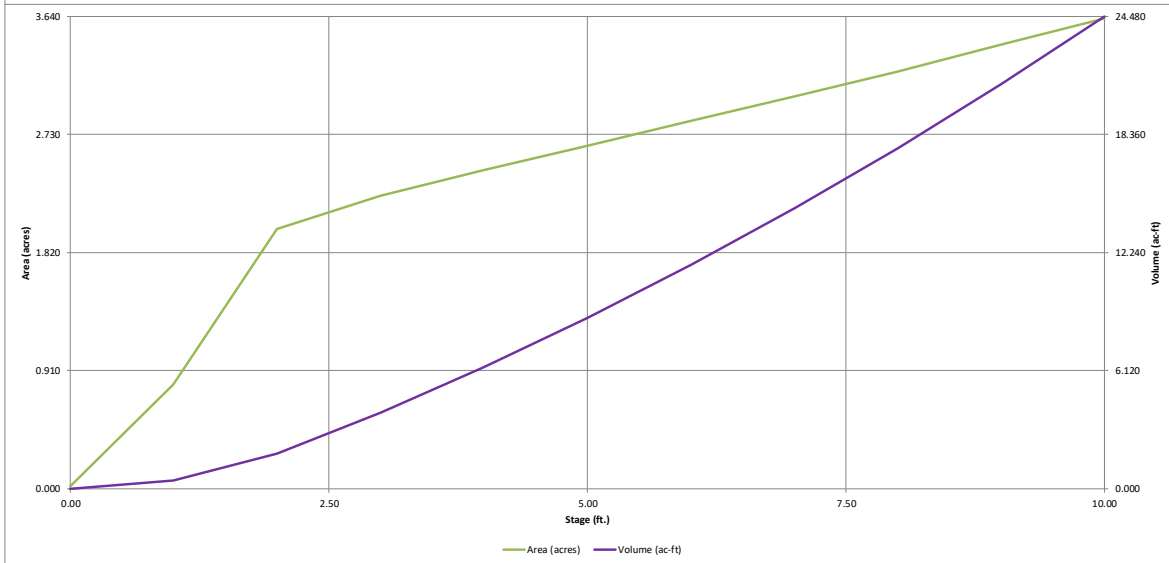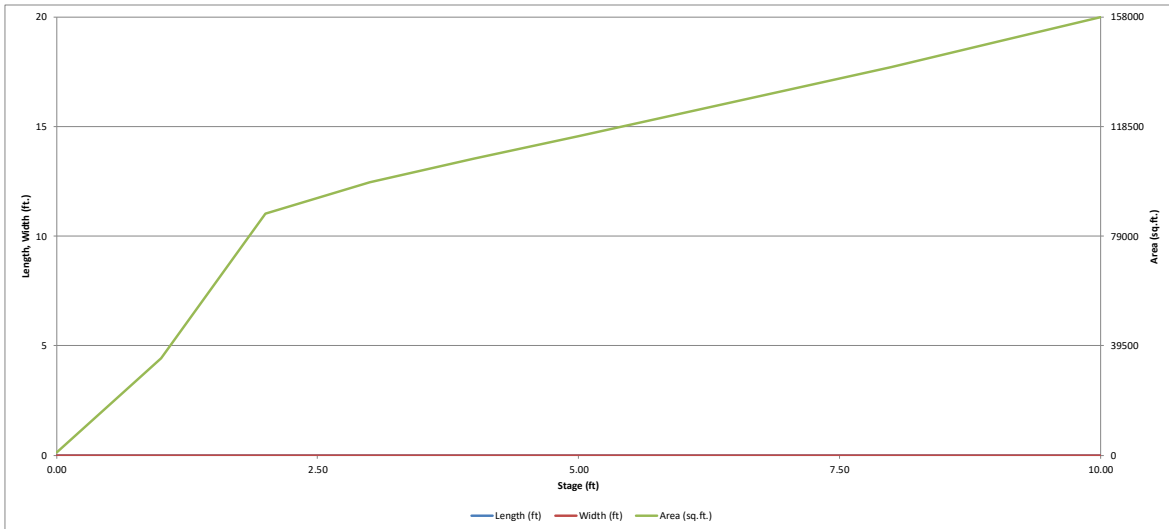


DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD- Detention, Version 4.04 (February 2021)

Project: Eagleview

Basin ID: Onsite Sub Regional Pond 1 (Watershed Area adjusted to match HEC-HMS Peak Q inflow)



	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	2.75	3.388	Orifice Plate
Zone 2 (EURV)	3.66	2.074	Orifice Plate
Zone 3 (100-year)	7.84	11.654	Weir&Pipe (Restrict)
Total (all zones)		17.116	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth = ft (distance below the filtration media surface)
 Underdrain Orifice Diameter = inches

Calculated Parameters for Underdrain

Underdrain Orifice Area = ft²
 Underdrain Orifice Centroid = feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice = 0.00 ft (relative to basin bottom at Stage = 0 ft)
 Depth at top of Zone using Orifice Plate = 3.66 ft (relative to basin bottom at Stage = 0 ft)
 Orifice Plate: Orifice Vertical Spacing = N/A inches
 Orifice Plate: Orifice Area per Row = N/A inches

Calculated Parameters for Plate

WQ Orifice Area per Row = N/A ft²
 Elliptical Half-Width = N/A feet
 Elliptical Slot Centroid = N/A feet
 Elliptical Slot Area = N/A ft²

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	1.20	2.40					
Orifice Area (sq. inches)	14.00	16.91	16.91					
	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

Invert of Vertical Orifice = Not Selected / Not Selected ft (relative to basin bottom at Stage = 0 ft)
 Depth at top of Zone using Vertical Orifice = N/A / N/A ft (relative to basin bottom at Stage = 0 ft)
 Vertical Orifice Diameter = N/A / N/A inches

Calculated Parameters for Vertical Orifice

Vertical Orifice Area = Not Selected / Not Selected ft²
 Vertical Orifice Centroid = N/A / N/A feet

User Input: Overflow Weir (Dropdown with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))

Overflow Weir Front Edge Height, H_o = Zone 3 Weir / Not Selected ft (relative to basin bottom at Stage = 0 ft)
 Overflow Weir Front Edge Length = 45.00 / N/A feet
 Overflow Weir Grate Slope = 4.00 / N/A H:V
 Horiz. Length of Weir Sides = 28.00 / N/A feet
 Overflow Grate Type = Type C Grate / N/A
 Debris Clogging % = 50% / N/A %

Calculated Parameters for Overflow Weir

Height of Grate Upper Edge, H_g = Zone 3 Weir / Not Selected feet
 Overflow Weir Slope Length = 10.66 / N/A feet
 Grate Open Area / 100-yr Orifice Area = 28.86 / N/A
 Overflow Grate Open Area w/o Debris = 27.35 / N/A ft²
 Overflow Grate Open Area w/ Debris = 903.95 / N/A ft²
 Overflow Grate Open Area w/ Debris = 451.97 / N/A ft²

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

Depth to Invert of Outlet Pipe = Zone 3 Restrictor / Not Selected ft (distance below basin bottom at Stage = 0 ft)
 Outlet Pipe Diameter = 1.00 / N/A inches
 Restrictor Plate Height Above Pipe Invert = 96.00 / N/A inches

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

Outlet Orifice Area = Zone 3 Restrictor / Not Selected ft²
 Outlet Orifice Centroid = 33.05 / N/A feet
 Half-Central Angle of Restrictor Plate on Pipe = 2.83 / N/A radians

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage = 8.15 ft (relative to basin bottom at Stage = 0 ft)
 Spillway Crest Length = 211.00 feet
 Spillway End Slopes = 4.00 H:V
 Freeboard above Max Water Surface = 1.00 feet

Calculated Parameters for Spillway

Spillway Design Flow Depth = 0.98 feet
 Stage at Top of Freeboard = 10.13 feet
 Basin Area at Top of Freeboard = 3.63 acres
 Basin Volume at Top of Freeboard = 24.48 acre-ft




Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
Design Storm Return Period =	N/A	N/A	1.19	1.50	1.75	2.00	2.25	2.52	3.14
One-Hour Rainfall Depth (in)	N/A	N/A	1.19	1.50	1.75	2.00	2.25	2.52	3.14
CUHP Runoff Volume (acre-ft)	3.388	5.462	6.108	14.124	22.214	36.928	46.830	61.216	87.253
Inflow Hydrograph Volume (acre-ft)	N/A	N/A	6.108	14.124	22.214	36.928	46.830	61.216	87.253
CUHP Predevelopment Peak Q (cfs)	N/A	N/A	34.8	99.1	155.4	287.2	362.3	474.6	666.9
OPTIONAL Override Predevelopment Peak Q (cfs)	N/A	N/A							
Predevelopment Unit Peak Flow, u (cfs/acre)	N/A	N/A	0.07	0.19	0.31	0.56	0.71	0.93	1.31
Peak Inflow Q (cfs)	N/A	N/A	52.3	118.9	175.7	308.1	383.9	491.5	684.0
Peak Outflow Q (cfs)	1.8	2.4	2.5	49.8	102.0	213.2	285.1	384.9	628.0
Ratio Peak Outflow to Predevelopment Q	N/A	N/A	N/A	0.5	0.7	0.7	0.8	0.8	0.9
Structure Controlling Flow	Plate	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Spillway
Max Velocity through Grate 1 (fps)	N/A	N/A	0.00	0.1	0.1	0.2	0.3	0.4	0.5
Max Velocity through Grate 2 (fps)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours)	43	53	57	52	47	40	37	32	25
Time to Drain 99% of Inflow Volume (hours)	46	57	61	60	58	54	52	48	44
Maximum Ponding Depth (ft)	2.75	3.66	3.68	4.75	5.39	6.41	6.93	7.68	8.63
Area at Maximum Ponding Depth (acres)	2.19	2.39	2.39	2.59	2.72	2.91	3.01	3.15	3.34
Maximum Volume Stored (acre-ft)	3.390	5.480	5.504	8.173	9.898	12.739	14.308	16.587	19.704

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.04 (February 2021)

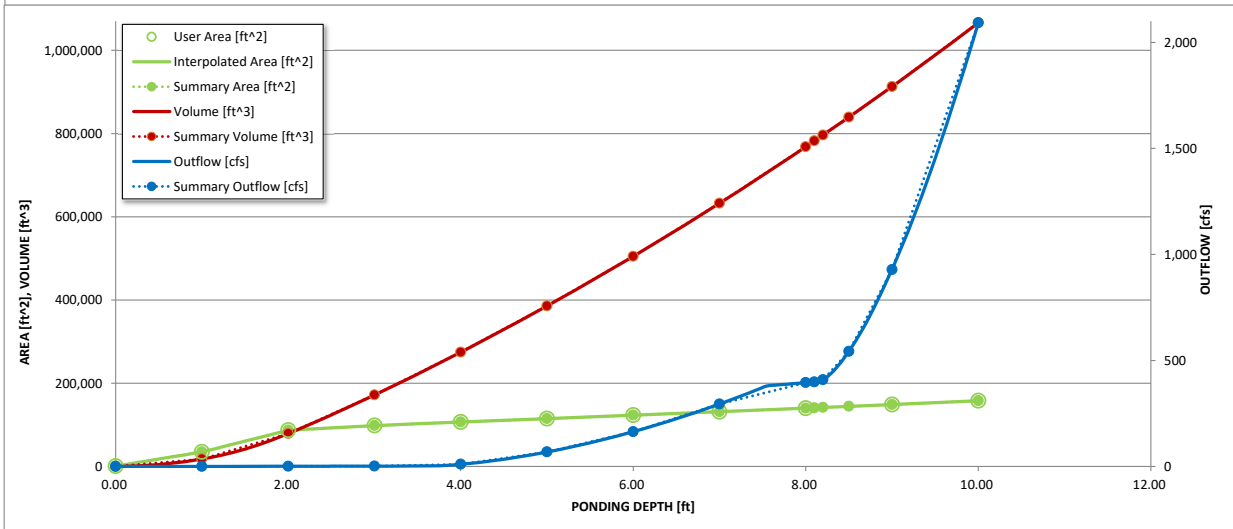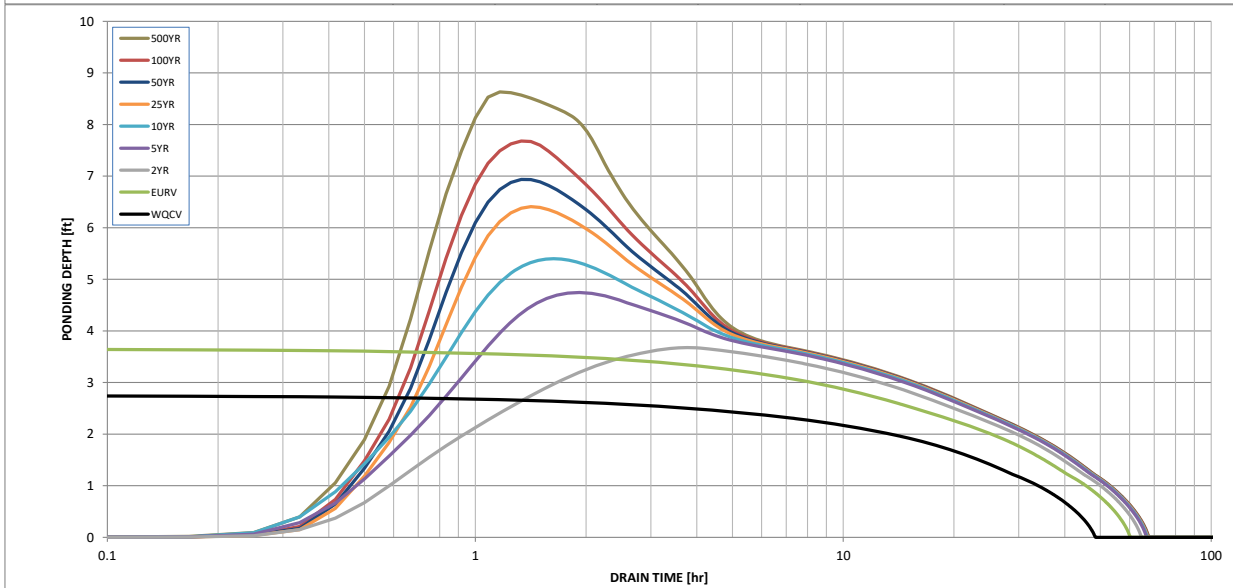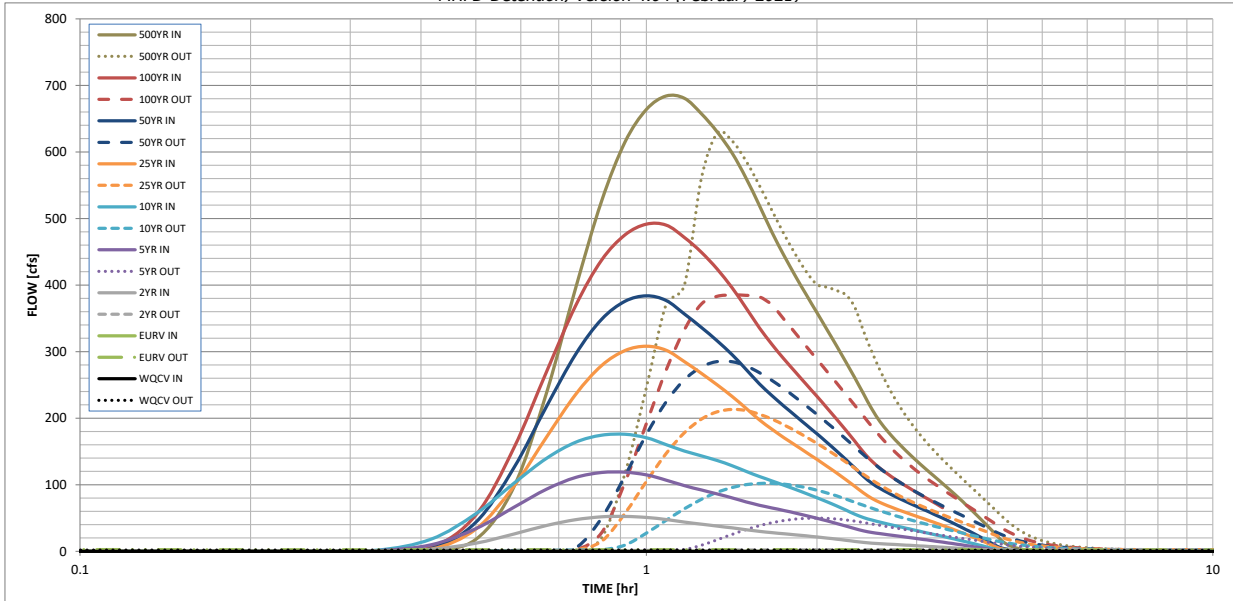

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.04 (February 2021)

Summary Stage-Area-Volume-Discharge Relationships

The user can create a summary S-A-V-D by entering the desired stage increments and the remainder of the table will populate automatically.

The user should graphically compare the summary S-A-V-D table to the full S-A-V-D table in the chart to confirm it captures all key transition points.

Stage - Storage Description	Stage [ft]	Area [ft ²]	Area [acres]	Volume [ft ³]	Volume [ac-ft]	Total Outflow [cfs]
7212	0.00	1,000	0.023	0	0.000	0.00
7213	1.00	35,000	0.803	17,999	0.413	0.47
7214	2.00	87,200	2.002	79,099	1.816	1.17
7215	3.00	98,400	2.259	171,899	3.946	2.01
7216	4.00	107,000	2.456	274,599	6.304	10.42
7217	5.00	115,100	2.642	385,649	8.853	68.48
7218	6.00	123,400	2.833	504,899	11.591	164.23
7219	7.00	131,700	3.023	632,449	14.519	294.69
7220	8.00	140,000	3.214	768,299	17.638	395.33
7220.1	8.10	140,900	3.235	782,344	17.960	398.52
7220.2	8.20	141,800	3.255	796,479	18.285	408.76
7220.5	8.50	144,500	3.317	839,424	19.271	542.80
7221	9.00	149,000	3.421	912,799	20.955	928.60
7222	10.00	158,000	3.627	1,066,299	24.479	2,092.38

For best results, include the stages of all grade slope changes (e.g. ISV and Floor) from the S-A-V table on Sheet 'Basin'.

Also include the inverts of all outlets (e.g. vertical orifice, overflow grate, and spillway, where applicable).



4582 S. Ulster Street - Suite 1500
Denver, Colorado 80237

Project: Eagleview
Project Number: 196288000
Date: 10/28/2021

Prepared By: DM
Checked By: BAH

Water Quality Capture Volume

Sub Regional Pond 1

Water Quality Capture Volume		
UDFCD V3 Equation 3-1	WQ Watershed Inches = $a*(0.91i^3 - 1.19i^2 + .78i)$	
	$a_{12} = 0.8$	(12-Hr Drain Time)
	$a_{24} = 0.9$	(24-Hr Drain Time)
	$a_{40} = 1.0$	(40-Hr Drain Time)
UDFCD V3 Equation 3-3	WQCV = (WQCV/12)*(Area)	
WQCV Impervious (Site) =	8.2%	
a =	1.0	
WQ Watershed Inches (Site) =	0.06	
Area (Site) =	720.00	AC
WQ Capture Volume (Site) =	3.388	AC-FT
	147,564	FT ³
20% extra for Sediment	4.07	AC-FT



4582 S. Ulster Street - Suite 1500
Denver, Colorado 80237

Project: Eagleview
Project Number: 196288000
Date: 10/28/2021

Prepared By: DM
Checked By: BAH

Water Quality Capture Volume

Water Quality Feature 1

Water Quality Capture Volume		
UDFCD V3 Equation 3-1	WQ Watershed Inches = $a*(0.91i^3 - 1.19i^2 + .78i)$	
	$a_{12} = 0.8$	(12-Hr Drain Time)
	$a_{24} = 0.9$	(24-Hr Drain Time)
	$a_{40} = 1.0$	(40-Hr Drain Time)
UDFCD V3 Equation 3-3	WQCV = (WQCV/12)*(Area)	
WQCV Impervious (Site) =	100.0%	
a =	1.0	
WQ Watershed Inches (Site) =	0.50	
Area (Site) =	2.29	AC
WQ Capture Volume (Site) =	0.095	AC-FT
	4,156	FT ³



4582 S. Ulster Street - Suite 1500
Denver, Colorado 80237

Project: Eagleview
Project Number: 196288000
Date: 10/28/2021

Prepared By: DM
Checked By: BAH

Water Quality Capture Volume

Water Quality Feature 2

Water Quality Capture Volume		
UDFCD V3 Equation 3-1	WQ Watershed Inches = $a \cdot (0.91i^3 - 1.19i^2 + .78i)$	
	$a_{12} = 0.8$	(12-Hr Drain Time)
	$a_{24} = 0.9$	(24-Hr Drain Time)
	$a_{40} = 1.0$	(40-Hr Drain Time)
UDFCD V3 Equation 3-3	WQCV = (WQCV/12)*(Area)	
WQCV Impervious (Site) =	100.0%	
a =	1.0	
WQ Watershed Inches (Site) =	0.50	
Area (Site) =	0.92	AC
WQ Capture Volume (Site) =	0.038	AC-FT
	1,670	FT ³

Hydrograph Volume Check

Time (min)	Time (sec)	HEC-HMS Inflow Hydrograph to Pond (cfs)	Adjusted Outflow Hydrograph from Pond [80% of inflow hydrograph] (cfs)	Volume of Inflow [CU. FT.]	Volume of Inflow [AC-FT]	Volume of Outflow [AC-FT]	Volume of Outflow [AC-FT]	Volume Difference [AC-FT]
0:00	0.00	0	0	0.00	0.00	0.00	0.00	0.00
0:01	60.00	0	0	0.00	0.00	0.00	0.00	0.00
0:02	120.00	0	0	0.00	0.00	0.00	0.00	0.00
0:03	180.00	0	0	0.00	0.00	0.00	0.00	0.00
0:04	240.00	0	0	0.00	0.00	0.00	0.00	0.00
0:05	300.00	0	0	0.00	0.00	0.00	0.00	0.00
0:06	360.00	0	0	0.00	0.00	0.00	0.00	0.00
0:07	420.00	0	0	0.00	0.00	0.00	0.00	0.00
0:08	480.00	0	0	0.00	0.00	0.00	0.00	0.00
0:09	540.00	0.1	0.08	3.00	0.00	2.40	0.00	0.00
0:10	600.00	0.1	0.08	9.00	0.00	7.20	0.00	0.00
0:11	660.00	0.1	0.08	15.00	0.00	12.00	0.00	0.00
0:12	720.00	0.1	0.08	21.00	0.00	16.80	0.00	0.00
0:13	780.00	0.1	0.08	27.00	0.00	21.60	0.00	0.00
0:14	840.00	0.1	0.08	33.00	0.00	26.40	0.00	0.00
0:15	900.00	0.1	0.08	39.00	0.00	31.20	0.00	0.00
0:16	960.00	0.1	0.08	45.00	0.00	36.00	0.00	0.00
0:17	1020.00	0.1	0.08	51.00	0.00	40.80	0.00	0.00
0:18	1080.00	0.2	0.16	60.00	0.00	48.00	0.00	0.00
0:19	1140.00	0.2	0.16	72.00	0.00	57.60	0.00	0.00
0:20	1200.00	0.2	0.16	84.00	0.00	67.20	0.00	0.00
0:21	1260.00	0.2	0.16	96.00	0.00	76.80	0.00	0.00
0:22	1320.00	0.2	0.16	108.00	0.00	86.40	0.00	0.00
0:23	1380.00	0.2	0.16	120.00	0.00	96.00	0.00	0.00
0:24	1440.00	0.3	0.24	135.00	0.00	108.00	0.00	0.00
0:25	1500.00	0.3	0.24	153.00	0.00	122.40	0.00	0.00
0:26	1560.00	0.3	0.24	171.00	0.00	136.80	0.00	0.00
0:27	1620.00	0.3	0.24	189.00	0.00	151.20	0.00	0.00
0:28	1680.00	0.3	0.24	207.00	0.00	165.60	0.00	0.00
0:29	1740.00	0.4	0.32	228.00	0.01	182.40	0.00	0.00
0:30	1800.00	0.4	0.32	252.00	0.01	201.60	0.00	0.00
0:31	1860.00	0.4	0.32	276.00	0.01	220.80	0.01	0.00
0:32	1920.00	0.4	0.32	300.00	0.01	240.00	0.01	0.00
0:33	1980.00	0.4	0.32	324.00	0.01	259.20	0.01	0.00
0:34	2040.00	0.5	0.4	351.00	0.01	280.80	0.01	0.00
0:35	2100.00	0.5	0.4	381.00	0.01	304.80	0.01	0.00
0:36	2160.00	0.5	0.4	411.00	0.01	328.80	0.01	0.00
0:37	2220.00	0.6	0.48	444.00	0.01	355.20	0.01	0.00
0:38	2280.00	0.6	0.48	480.00	0.01	384.00	0.01	0.00
0:39	2340.00	0.6	0.48	516.00	0.01	412.80	0.01	0.00
0:40	2400.00	0.7	0.56	555.00	0.01	444.00	0.01	0.00
0:41	2460.00	0.7	0.56	597.00	0.01	477.60	0.01	0.00
0:42	2520.00	0.7	0.56	639.00	0.01	511.20	0.01	0.00
0:43	2580.00	0.8	0.64	684.00	0.02	547.20	0.01	0.00
0:44	2640.00	0.8	0.64	732.00	0.02	585.60	0.01	0.00
0:45	2700.00	0.9	0.72	783.00	0.02	626.40	0.01	0.00
0:46	2760.00	0.9	0.72	837.00	0.02	669.60	0.02	0.00
0:47	2820.00	1	0.8	894.00	0.02	715.20	0.02	0.00
0:48	2880.00	1	0.8	954.00	0.02	763.20	0.02	0.00
0:49	2940.00	1	0.8	1014.00	0.02	811.20	0.02	0.00
0:50	3000.00	1.1	0.88	1077.00	0.02	861.60	0.02	0.00
0:51	3060.00	1.1	0.88	1143.00	0.03	914.40	0.02	0.01
0:52	3120.00	1.2	0.96	1212.00	0.03	969.60	0.02	0.01
0:53	3180.00	1.2	0.96	1284.00	0.03	1027.20	0.02	0.01
0:54	3240.00	1.2	0.96	1356.00	0.03	1084.80	0.02	0.01
0:55	3300.00	1.3	1.04	1431.00	0.03	1144.80	0.03	0.01
0:56	3360.00	1.3	1.04	1509.00	0.03	1207.20	0.03	0.01
0:57	3420.00	1.3	1.04	1587.00	0.04	1269.60	0.03	0.01
0:58	3480.00	1.4	1.12	1668.00	0.04	1334.40	0.03	0.01
0:59	3540.00	1.4	1.12	1752.00	0.04	1401.60	0.03	0.01
1:00	3600.00	1.5	1.2	1839.00	0.04	1471.20	0.03	0.01
1:01	3660.00	1.5	1.2	1929.00	0.04	1543.20	0.04	0.01
1:02	3720.00	1.5	1.2	2019.00	0.05	1615.20	0.04	0.01
1:03	3780.00	1.6	1.28	2112.00	0.05	1689.60	0.04	0.01
1:04	3840.00	1.6	1.28	2208.00	0.05	1766.40	0.04	0.01
1:05	3900.00	1.7	1.36	2307.00	0.05	1845.60	0.04	0.01
1:06	3960.00	1.7	1.36	2409.00	0.06	1927.20	0.04	0.01
1:07	4020.00	1.7	1.36	2511.00	0.06	2008.80	0.05	0.01
1:08	4080.00	1.8	1.44	2616.00	0.06	2092.80	0.05	0.01
1:09	4140.00	1.8	1.44	2724.00	0.06	2179.20	0.05	0.01
1:10	4200.00	1.9	1.52	2835.00	0.07	2268.00	0.05	0.01
1:11	4260.00	1.9	1.52	2949.00	0.07	2359.20	0.05	0.01
1:12	4320.00	1.9	1.52	3063.00	0.07	2450.40	0.06	0.01
1:13	4380.00	2	1.6	3180.00	0.07	2544.00	0.06	0.01
1:14	4440.00	2	1.6	3300.00	0.08	2640.00	0.06	0.02
1:15	4500.00	2	1.6	3420.00	0.08	2736.00	0.06	0.02
1:16	4560.00	2.1	1.68	3543.00	0.08	2834.40	0.07	0.02
1:17	4620.00	2.1	1.68	3669.00	0.08	2935.20	0.07	0.02
1:18	4680.00	2.1	1.68	3795.00	0.09	3036.00	0.07	0.02
1:19	4740.00	2.2	1.76	3924.00	0.09	3139.20	0.07	0.02
1:20	4800.00	2.2	1.76	4056.00	0.09	3244.80	0.07	0.02
1:21	4860.00	2.2	1.76	4188.00	0.10	3350.40	0.08	0.02
1:22	4920.00	2.3	1.84	4323.00	0.10	3458.40	0.08	0.02
1:23	4980.00	2.3	1.84	4461.00	0.10	3568.80	0.08	0.02
1:24	5040.00	2.3	1.84	4599.00	0.11	3679.20	0.08	0.02
1:25	5100.00	2.4	1.92	4740.00	0.11	3792.00	0.09	0.02
1:26	5160.00	2.4	1.92	4884.00	0.11	3907.20	0.09	0.02
1:27	5220.00	2.4	1.92	5028.00	0.12	4022.40	0.09	0.02
1:28	5280.00	2.4	1.92	5172.00	0.12	4137.60	0.09	0.02
1:29	5340.00	2.5	2	5319.00	0.12	4255.20	0.10	0.02

1:30	5400.00	2.5	2	5469.00	0.13	4375.20	0.10	0.03
1:31	5460.00	2.5	2	5619.00	0.13	4495.20	0.10	0.03
1:32	5520.00	2.5	2	5769.00	0.13	4615.20	0.11	0.03
1:33	5580.00	2.6	2.08	5922.00	0.14	4737.60	0.11	0.03
1:34	5640.00	2.6	2.08	6078.00	0.14	4862.40	0.11	0.03
1:35	5700.00	2.6	2.08	6234.00	0.14	4987.20	0.11	0.03
1:36	5760.00	2.6	2.08	6390.00	0.15	5112.00	0.12	0.03
1:37	5820.00	2.6	2.08	6546.00	0.15	5236.80	0.12	0.03
1:38	5880.00	2.6	2.08	6702.00	0.15	5361.60	0.12	0.03
1:39	5940.00	2.6	2.08	6858.00	0.16	5486.40	0.13	0.03
1:40	6000.00	2.7	2.16	7017.00	0.16	5613.60	0.13	0.03
1:41	6060.00	2.7	2.16	7179.00	0.16	5743.20	0.13	0.03
1:42	6120.00	2.7	2.16	7341.00	0.17	5872.80	0.13	0.03
1:43	6180.00	2.7	2.16	7503.00	0.17	6002.40	0.14	0.03
1:44	6240.00	2.7	2.16	7665.00	0.18	6132.00	0.14	0.04
1:45	6300.00	2.7	2.16	7827.00	0.18	6261.60	0.14	0.04
1:46	6360.00	2.7	2.16	7989.00	0.18	6391.20	0.15	0.04
1:47	6420.00	2.7	2.16	8151.00	0.19	6520.80	0.15	0.04
1:48	6480.00	2.8	2.24	8316.00	0.19	6652.80	0.15	0.04
1:49	6540.00	2.8	2.24	8484.00	0.19	6787.20	0.16	0.04
1:50	6600.00	2.8	2.24	8652.00	0.20	6921.60	0.16	0.04
1:51	6660.00	2.8	2.24	8820.00	0.20	7056.00	0.16	0.04
1:52	6720.00	2.8	2.24	8988.00	0.21	7190.40	0.17	0.04
1:53	6780.00	2.8	2.24	9156.00	0.21	7324.80	0.17	0.04
1:54	6840.00	2.9	2.32	9327.00	0.21	7461.60	0.17	0.04
1:55	6900.00	2.9	2.32	9501.00	0.22	7600.80	0.17	0.04
1:56	6960.00	2.9	2.32	9675.00	0.22	7740.00	0.18	0.04
1:57	7020.00	2.9	2.32	9849.00	0.23	7879.20	0.18	0.05
1:58	7080.00	3	2.4	10026.00	0.23	8020.80	0.18	0.05
1:59	7140.00	3	2.4	10206.00	0.23	8164.80	0.19	0.05
2:00	7200.00	3	2.4	10386.00	0.24	8308.80	0.19	0.05
2:01	7260.00	3	2.4	10566.00	0.24	8452.80	0.19	0.05
2:02	7320.00	3	2.4	10746.00	0.25	8596.80	0.20	0.05
2:03	7380.00	3	2.4	10926.00	0.25	8740.80	0.20	0.05
2:04	7440.00	3.1	2.48	11109.00	0.26	8887.20	0.20	0.05
2:05	7500.00	3.1	2.48	11295.00	0.26	9036.00	0.21	0.05
2:06	7560.00	3.1	2.48	11481.00	0.26	9184.80	0.21	0.05
2:07	7620.00	3.1	2.48	11667.00	0.27	9333.60	0.21	0.05
2:08	7680.00	3.1	2.48	11853.00	0.27	9482.40	0.22	0.05
2:09	7740.00	3.1	2.48	12039.00	0.28	9631.20	0.22	0.06
2:10	7800.00	3.1	2.48	12225.00	0.28	9780.00	0.22	0.06
2:11	7860.00	3.1	2.48	12411.00	0.28	9928.80	0.23	0.06
2:12	7920.00	3.1	2.48	12597.00	0.29	10077.60	0.23	0.06
2:13	7980.00	3.1	2.48	12783.00	0.29	10226.40	0.23	0.06
2:14	8040.00	3.1	2.48	12969.00	0.30	10375.20	0.24	0.06
2:15	8100.00	3.1	2.48	13155.00	0.30	10524.00	0.24	0.06
2:16	8160.00	3.1	2.48	13341.00	0.31	10672.80	0.25	0.06
2:17	8220.00	3.2	2.56	13530.00	0.31	10824.00	0.25	0.06
2:18	8280.00	3.2	2.56	13722.00	0.32	10977.60	0.25	0.06
2:19	8340.00	3.2	2.56	13914.00	0.32	11131.20	0.26	0.06
2:20	8400.00	3.2	2.56	14106.00	0.32	11284.80	0.26	0.06
2:21	8460.00	3.2	2.56	14298.00	0.33	11438.40	0.26	0.07
2:22	8520.00	3.2	2.56	14490.00	0.33	11592.00	0.27	0.07
2:23	8580.00	3.2	2.56	14682.00	0.34	11745.60	0.27	0.07
2:24	8640.00	3.2	2.56	14874.00	0.34	11899.20	0.27	0.07
2:25	8700.00	3.2	2.56	15066.00	0.35	12052.80	0.28	0.07
2:26	8760.00	3.2	2.56	15258.00	0.35	12206.40	0.28	0.07
2:27	8820.00	3.2	2.56	15450.00	0.35	12360.00	0.28	0.07
2:28	8880.00	3.2	2.56	15642.00	0.36	12513.60	0.29	0.07
2:29	8940.00	3.2	2.56	15834.00	0.36	12667.20	0.29	0.07
2:30	9000.00	3.2	2.56	16026.00	0.37	12820.80	0.29	0.07
2:31	9060.00	3.2	2.56	16218.00	0.37	12974.40	0.30	0.07
2:32	9120.00	3.2	2.56	16410.00	0.38	13128.00	0.30	0.08
2:33	9180.00	3.2	2.56	16602.00	0.38	13281.60	0.30	0.08
2:34	9240.00	3.2	2.56	16794.00	0.39	13435.20	0.31	0.08
2:35	9300.00	3.2	2.56	16986.00	0.39	13588.80	0.31	0.08
2:36	9360.00	3.2	2.56	17178.00	0.39	13742.40	0.32	0.08
2:37	9420.00	3.2	2.56	17370.00	0.40	13896.00	0.32	0.08
2:38	9480.00	3.2	2.56	17562.00	0.40	14049.60	0.32	0.08
2:39	9540.00	3.2	2.56	17754.00	0.41	14203.20	0.33	0.08
2:40	9600.00	3.2	2.56	17946.00	0.41	14356.80	0.33	0.08
2:41	9660.00	3.2	2.56	18138.00	0.42	14510.40	0.33	0.08
2:42	9720.00	3.2	2.56	18330.00	0.42	14664.00	0.34	0.08
2:43	9780.00	3.3	2.64	18525.00	0.43	14820.00	0.34	0.09
2:44	9840.00	3.3	2.64	18723.00	0.43	14978.40	0.34	0.09
2:45	9900.00	3.3	2.64	18921.00	0.43	15136.80	0.35	0.09
2:46	9960.00	3.3	2.64	19119.00	0.44	15295.20	0.35	0.09
2:47	10020.00	3.3	2.64	19317.00	0.44	15453.60	0.35	0.09
2:48	10080.00	3.3	2.64	19515.00	0.45	15612.00	0.36	0.09
2:49	10140.00	3.3	2.64	19713.00	0.45	15770.40	0.36	0.09
2:50	10200.00	3.2	2.56	19908.00	0.46	15926.40	0.37	0.09
2:51	10260.00	3.2	2.56	20100.00	0.46	16080.00	0.37	0.09
2:52	10320.00	3.2	2.56	20292.00	0.47	16233.60	0.37	0.09
2:53	10380.00	3.2	2.56	20484.00	0.47	16387.20	0.38	0.09
2:54	10440.00	3.2	2.56	20676.00	0.47	16540.80	0.38	0.09
2:55	10500.00	3.2	2.56	20868.00	0.48	16694.40	0.38	0.10
2:56	10560.00	3.2	2.56	21060.00	0.48	16848.00	0.39	0.10
2:57	10620.00	3.2	2.56	21252.00	0.49	17001.60	0.39	0.10
2:58	10680.00	3.2	2.56	21444.00	0.49	17155.20	0.39	0.10
2:59	10740.00	3.2	2.56	21636.00	0.50	17308.80	0.40	0.10
3:00	10800.00	3.2	2.56	21828.00	0.50	17462.40	0.40	0.10
3:01	10860.00	3.2	2.56	22020.00	0.51	17616.00	0.40	0.10
3:02	10920.00	3.2	2.56	22212.00	0.51	17769.60	0.41	0.10
3:03	10980.00	3.2	2.56	22404.00	0.51	17923.20	0.41	0.10
3:04	11040.00	3.2	2.56	22596.00	0.52	18076.80	0.41	0.10
3:05	11100.00	3.2	2.56	22788.00	0.52	18230.40	0.42	0.10

3:06	11160.00	3.2	2.56	22980.00	0.53	18384.00	0.42	0.11
3:07	11220.00	3.2	2.56	23172.00	0.53	18537.60	0.43	0.11
3:08	11280.00	3.2	2.56	23364.00	0.54	18691.20	0.43	0.11
3:09	11340.00	3.2	2.56	23556.00	0.54	18844.80	0.43	0.11
3:10	11400.00	3.2	2.56	23748.00	0.55	18998.40	0.44	0.11
3:11	11460.00	3.2	2.56	23940.00	0.55	19152.00	0.44	0.11
3:12	11520.00	3.2	2.56	24132.00	0.55	19305.60	0.44	0.11
3:13	11580.00	3.2	2.56	24324.00	0.56	19459.20	0.45	0.11
3:14	11640.00	3.2	2.56	24516.00	0.56	19612.80	0.45	0.11
3:15	11700.00	3.2	2.56	24708.00	0.57	19766.40	0.45	0.11
3:16	11760.00	3.2	2.56	24900.00	0.57	19920.00	0.46	0.11
3:17	11820.00	3.2	2.56	25092.00	0.58	20073.60	0.46	0.12
3:18	11880.00	3.2	2.56	25284.00	0.58	20227.20	0.46	0.12
3:19	11940.00	3.2	2.56	25476.00	0.58	20380.80	0.47	0.12
3:20	12000.00	3.2	2.56	25668.00	0.59	20534.40	0.47	0.12
3:21	12060.00	3.2	2.56	25860.00	0.59	20688.00	0.47	0.12
3:22	12120.00	3.2	2.56	26052.00	0.60	20841.60	0.48	0.12
3:23	12180.00	3.2	2.56	26244.00	0.60	20995.20	0.48	0.12
3:24	12240.00	3.2	2.56	26436.00	0.61	21148.80	0.49	0.12
3:25	12300.00	3.2	2.56	26628.00	0.61	21302.40	0.49	0.12
3:26	12360.00	3.2	2.56	26820.00	0.62	21456.00	0.49	0.12
3:27	12420.00	3.2	2.56	27012.00	0.62	21609.60	0.50	0.12
3:28	12480.00	3.2	2.56	27204.00	0.62	21763.20	0.50	0.12
3:29	12540.00	3.2	2.56	27396.00	0.63	21916.80	0.50	0.13
3:30	12600.00	3.2	2.56	27588.00	0.63	22070.40	0.51	0.13
3:31	12660.00	3.2	2.56	27780.00	0.64	22224.00	0.51	0.13
3:32	12720.00	3.2	2.56	27972.00	0.64	22377.60	0.51	0.13
3:33	12780.00	3.2	2.56	28164.00	0.65	22531.20	0.52	0.13
3:34	12840.00	3.2	2.56	28356.00	0.65	22684.80	0.52	0.13
3:35	12900.00	3.2	2.56	28548.00	0.66	22838.40	0.52	0.13
3:36	12960.00	3.2	2.56	28740.00	0.66	22992.00	0.53	0.13
3:37	13020.00	3.2	2.56	28932.00	0.66	23145.60	0.53	0.13
3:38	13080.00	3.2	2.56	29124.00	0.67	23299.20	0.53	0.13
3:39	13140.00	3.2	2.56	29316.00	0.67	23452.80	0.54	0.13
3:40	13200.00	3.2	2.56	29508.00	0.68	23606.40	0.54	0.14
3:41	13260.00	3.2	2.56	29700.00	0.68	23760.00	0.55	0.14
3:42	13320.00	3.2	2.56	29892.00	0.69	23913.60	0.55	0.14
3:43	13380.00	3.2	2.56	30084.00	0.69	24067.20	0.55	0.14
3:44	13440.00	3.2	2.56	30276.00	0.70	24220.80	0.56	0.14
3:45	13500.00	3.2	2.56	30468.00	0.70	24374.40	0.56	0.14
3:46	13560.00	3.2	2.56	30660.00	0.70	24528.00	0.56	0.14
3:47	13620.00	3.2	2.56	30852.00	0.71	24681.60	0.57	0.14
3:48	13680.00	3.2	2.56	31044.00	0.71	24835.20	0.57	0.14
3:49	13740.00	3.2	2.56	31236.00	0.72	24988.80	0.57	0.14
3:50	13800.00	3.2	2.56	31428.00	0.72	25142.40	0.58	0.14
3:51	13860.00	3.2	2.56	31620.00	0.73	25296.00	0.58	0.15
3:52	13920.00	3.2	2.56	31812.00	0.73	25449.60	0.58	0.15
3:53	13980.00	3.2	2.56	32004.00	0.73	25603.20	0.59	0.15
3:54	14040.00	3.2	2.56	32196.00	0.74	25756.80	0.59	0.15
3:55	14100.00	3.2	2.56	32388.00	0.74	25910.40	0.59	0.15
3:56	14160.00	3.2	2.56	32580.00	0.75	26064.00	0.60	0.15
3:57	14220.00	3.2	2.56	32772.00	0.75	26217.60	0.60	0.15
3:58	14280.00	3.3	2.64	32967.00	0.76	26373.60	0.61	0.15
3:59	14340.00	3.3	2.64	33165.00	0.76	26532.00	0.61	0.15
4:00	14400.00	3.3	2.64	33363.00	0.77	26690.40	0.61	0.15
4:01	14460.00	3.3	2.64	33561.00	0.77	26848.80	0.62	0.15
4:02	14520.00	3.3	2.64	33759.00	0.78	27007.20	0.62	0.16
4:03	14580.00	3.3	2.64	33957.00	0.78	27165.60	0.62	0.16
4:04	14640.00	3.3	2.64	34155.00	0.78	27324.00	0.63	0.16
4:05	14700.00	3.3	2.64	34353.00	0.79	27482.40	0.63	0.16
4:06	14760.00	3.3	2.64	34551.00	0.79	27640.80	0.63	0.16
4:07	14820.00	3.3	2.64	34749.00	0.80	27799.20	0.64	0.16
4:08	14880.00	3.4	2.72	34950.00	0.80	27960.00	0.64	0.16
4:09	14940.00	3.4	2.72	35154.00	0.81	28123.20	0.65	0.16
4:10	15000.00	3.4	2.72	35358.00	0.81	28286.40	0.65	0.16
4:11	15060.00	3.4	2.72	35562.00	0.82	28449.60	0.65	0.16
4:12	15120.00	3.4	2.72	35766.00	0.82	28612.80	0.66	0.16
4:13	15180.00	3.4	2.72	35970.00	0.83	28776.00	0.66	0.17
4:14	15240.00	3.4	2.72	36174.00	0.83	28939.20	0.66	0.17
4:15	15300.00	3.4	2.72	36378.00	0.84	29102.40	0.67	0.17
4:16	15360.00	3.4	2.72	36582.00	0.84	29265.60	0.67	0.17
4:17	15420.00	3.5	2.8	36789.00	0.84	29431.20	0.68	0.17
4:18	15480.00	3.5	2.8	36999.00	0.85	29599.20	0.68	0.17
4:19	15540.00	3.5	2.8	37209.00	0.85	29767.20	0.68	0.17
4:20	15600.00	3.5	2.8	37419.00	0.86	29935.20	0.69	0.17
4:21	15660.00	3.5	2.8	37629.00	0.86	30103.20	0.69	0.17
4:22	15720.00	3.5	2.8	37839.00	0.87	30271.20	0.69	0.17
4:23	15780.00	3.5	2.8	38049.00	0.87	30439.20	0.70	0.17
4:24	15840.00	3.6	2.88	38262.00	0.88	30609.60	0.70	0.18
4:25	15900.00	3.6	2.88	38478.00	0.88	30782.40	0.71	0.18
4:26	15960.00	3.6	2.88	38694.00	0.89	30955.20	0.71	0.18
4:27	16020.00	3.6	2.88	38910.00	0.89	31128.00	0.71	0.18
4:28	16080.00	3.6	2.88	39126.00	0.90	31300.80	0.72	0.18
4:29	16140.00	3.7	2.96	39345.00	0.90	31476.00	0.72	0.18
4:30	16200.00	3.7	2.96	39567.00	0.91	31653.60	0.73	0.18
4:31	16260.00	3.7	2.96	39789.00	0.91	31831.20	0.73	0.18
4:32	16320.00	3.7	2.96	40011.00	0.92	32008.80	0.73	0.18
4:33	16380.00	3.7	2.96	40233.00	0.92	32186.40	0.74	0.18
4:34	16440.00	3.8	3.04	40458.00	0.93	32366.40	0.74	0.19
4:35	16500.00	3.8	3.04	40686.00	0.93	32548.80	0.75	0.19
4:36	16560.00	3.8	3.04	40914.00	0.94	32731.20	0.75	0.19
4:37	16620.00	3.8	3.04	41142.00	0.94	32913.60	0.76	0.19
4:38	16680.00	3.8	3.04	41370.00	0.95	33096.00	0.76	0.19
4:39	16740.00	3.9	3.12	41601.00	0.96	33280.80	0.76	0.19
4:40	16800.00	3.9	3.12	41835.00	0.96	33468.00	0.77	0.19
4:41	16860.00	3.9	3.12	42069.00	0.97	33655.20	0.77	0.19

4:42	16920.00	3.9	3.12	42303.00	0.97	33842.40	0.78	0.19
4:43	16980.00	3.9	3.12	42537.00	0.98	34029.60	0.78	0.20
4:44	17040.00	4	3.2	42774.00	0.98	34219.20	0.79	0.20
4:45	17100.00	4	3.2	43014.00	0.99	34411.20	0.79	0.20
4:46	17160.00	4	3.2	43254.00	0.99	34603.20	0.79	0.20
4:47	17220.00	4	3.2	43494.00	1.00	34795.20	0.80	0.20
4:48	17280.00	4	3.2	43734.00	1.00	34987.20	0.80	0.20
4:49	17340.00	4	3.2	43974.00	1.01	35179.20	0.81	0.20
4:50	17400.00	4	3.2	44214.00	1.02	35371.20	0.81	0.20
4:51	17460.00	4	3.2	44454.00	1.02	35563.20	0.82	0.20
4:52	17520.00	4	3.2	44694.00	1.03	35755.20	0.82	0.21
4:53	17580.00	4	3.2	44934.00	1.03	35947.20	0.83	0.21
4:54	17640.00	4	3.2	45174.00	1.04	36139.20	0.83	0.21
4:55	17700.00	4	3.2	45414.00	1.04	36331.20	0.83	0.21
4:56	17760.00	4	3.2	45654.00	1.05	36523.20	0.84	0.21
4:57	17820.00	4	3.2	45894.00	1.05	36715.20	0.84	0.21
4:58	17880.00	4	3.2	46134.00	1.06	36907.20	0.85	0.21
4:59	17940.00	4	3.2	46374.00	1.06	37099.20	0.85	0.21
5:00	18000.00	4	3.2	46614.00	1.07	37291.20	0.86	0.21
5:01	18060.00	4	3.2	46854.00	1.08	37483.20	0.86	0.22
5:02	18120.00	4	3.2	47094.00	1.08	37675.20	0.86	0.22
5:03	18180.00	4	3.2	47334.00	1.09	37867.20	0.87	0.22
5:04	18240.00	4	3.2	47574.00	1.09	38059.20	0.87	0.22
5:05	18300.00	4	3.2	47814.00	1.10	38251.20	0.88	0.22
5:06	18360.00	4	3.2	48054.00	1.10	38443.20	0.88	0.22
5:07	18420.00	4	3.2	48294.00	1.11	38635.20	0.89	0.22
5:08	18480.00	4	3.2	48534.00	1.11	38827.20	0.89	0.22
5:09	18540.00	4	3.2	48774.00	1.12	39019.20	0.90	0.22
5:10	18600.00	4	3.2	49014.00	1.13	39211.20	0.90	0.23
5:11	18660.00	4	3.2	49254.00	1.13	39403.20	0.90	0.23
5:12	18720.00	4	3.2	49494.00	1.14	39595.20	0.91	0.23
5:13	18780.00	4	3.2	49734.00	1.14	39787.20	0.91	0.23
5:14	18840.00	4	3.2	49974.00	1.15	39979.20	0.92	0.23
5:15	18900.00	4.1	3.28	50217.00	1.15	40173.60	0.92	0.23
5:16	18960.00	4.1	3.28	50460.00	1.16	40370.40	0.93	0.23
5:17	19020.00	4.1	3.28	50709.00	1.16	40567.20	0.93	0.23
5:18	19080.00	4.1	3.28	50955.00	1.17	40764.00	0.94	0.23
5:19	19140.00	4	3.2	51198.00	1.18	40958.40	0.94	0.24
5:20	19200.00	4	3.2	51438.00	1.18	41150.40	0.94	0.24
5:21	19260.00	4	3.2	51678.00	1.19	41342.40	0.95	0.24
5:22	19320.00	4	3.2	51918.00	1.19	41534.40	0.95	0.24
5:23	19380.00	4	3.2	52158.00	1.20	41726.40	0.96	0.24
5:24	19440.00	4	3.2	52398.00	1.20	41918.40	0.96	0.24
5:25	19500.00	4	3.2	52638.00	1.21	42110.40	0.97	0.24
5:26	19560.00	4	3.2	52878.00	1.21	42302.40	0.97	0.24
5:27	19620.00	4	3.2	53118.00	1.22	42494.40	0.98	0.24
5:28	19680.00	4	3.2	53358.00	1.22	42686.40	0.98	0.24
5:29	19740.00	4	3.2	53598.00	1.23	42878.40	0.98	0.25
5:30	19800.00	4	3.2	53838.00	1.24	43070.40	0.99	0.25
5:31	19860.00	4	3.2	54078.00	1.24	43262.40	0.99	0.25
5:32	19920.00	4	3.2	54318.00	1.25	43454.40	1.00	0.25
5:33	19980.00	4	3.2	54558.00	1.25	43646.40	1.00	0.25
5:34	20040.00	4	3.2	54798.00	1.26	43838.40	1.01	0.25
5:35	20100.00	4	3.2	55038.00	1.26	44030.40	1.01	0.25
5:36	20160.00	4	3.2	55278.00	1.27	44222.40	1.02	0.25
5:37	20220.00	4	3.2	55518.00	1.27	44414.40	1.02	0.25
5:38	20280.00	4	3.2	55758.00	1.28	44606.40	1.02	0.26
5:39	20340.00	4	3.2	55998.00	1.29	44798.40	1.03	0.26
5:40	20400.00	4	3.2	56238.00	1.29	44990.40	1.03	0.26
5:41	20460.00	4	3.2	56478.00	1.30	45182.40	1.04	0.26
5:42	20520.00	4	3.2	56718.00	1.30	45374.40	1.04	0.26
5:43	20580.00	4.1	3.28	56961.00	1.31	45568.80	1.05	0.26
5:44	20640.00	4.1	3.28	57207.00	1.31	45765.60	1.05	0.26
5:45	20700.00	4.1	3.28	57453.00	1.32	45962.40	1.06	0.26
5:46	20760.00	4.1	3.28	57699.00	1.32	46159.20	1.06	0.26
5:47	20820.00	4.1	3.28	57945.00	1.33	46356.00	1.06	0.27
5:48	20880.00	4.1	3.28	58191.00	1.34	46552.80	1.07	0.27
5:49	20940.00	4.2	3.36	58440.00	1.34	46752.00	1.07	0.27
5:50	21000.00	4.2	3.36	58692.00	1.35	46953.60	1.08	0.27
5:51	21060.00	4.2	3.36	58944.00	1.35	47155.20	1.08	0.27
5:52	21120.00	4.2	3.36	59196.00	1.36	47356.80	1.09	0.27
5:53	21180.00	4.2	3.36	59448.00	1.36	47558.40	1.09	0.27
5:54	21240.00	4.3	3.44	59703.00	1.37	47762.40	1.10	0.27
5:55	21300.00	4.3	3.44	59961.00	1.38	47968.80	1.10	0.28
5:56	21360.00	4.3	3.44	60219.00	1.38	48175.20	1.11	0.28
5:57	21420.00	4.3	3.44	60477.00	1.39	48381.60	1.11	0.28
5:58	21480.00	4.3	3.44	60735.00	1.39	48588.00	1.12	0.28
5:59	21540.00	4.3	3.44	60993.00	1.40	48794.40	1.12	0.28
6:00	21600.00	4.3	3.44	61251.00	1.41	49000.80	1.12	0.28
6:01	21660.00	4.4	3.52	61512.00	1.41	49209.60	1.13	0.28
6:02	21720.00	4.4	3.52	61776.00	1.42	49420.80	1.13	0.28
6:03	21780.00	4.4	3.52	62040.00	1.42	49632.00	1.14	0.28
6:04	21840.00	4.4	3.52	62304.00	1.43	49843.20	1.14	0.29
6:05	21900.00	4.4	3.52	62568.00	1.44	50054.40	1.15	0.29
6:06	21960.00	4.4	3.52	62832.00	1.44	50265.60	1.15	0.29
6:07	22020.00	4.4	3.52	63096.00	1.45	50476.80	1.16	0.29
6:08	22080.00	4.5	3.6	63363.00	1.45	50690.40	1.16	0.29
6:09	22140.00	4.5	3.6	63633.00	1.46	50906.40	1.17	0.29
6:10	22200.00	4.5	3.6	63903.00	1.47	51122.40	1.17	0.29
6:11	22260.00	4.5	3.6	64173.00	1.47	51338.40	1.18	0.29
6:12	22320.00	4.5	3.6	64443.00	1.48	51554.40	1.18	0.30
6:13	22380.00	4.5	3.6	64713.00	1.49	51770.40	1.19	0.30
6:14	22440.00	4.5	3.6	64983.00	1.49	51986.40	1.19	0.30
6:15	22500.00	4.5	3.6	65253.00	1.50	52202.40	1.20	0.30
6:16	22560.00	4.5	3.6	65523.00	1.50	52418.40	1.20	0.30
6:17	22620.00	4.5	3.6	65793.00	1.51	52634.40	1.21	0.30

6:18	22680.00	4.6	3.68	66066.00	1.52	52852.80	1.21	0.30
6:19	22740.00	4.6	3.68	66342.00	1.52	53073.60	1.22	0.30
6:20	22800.00	4.6	3.68	66618.00	1.53	53294.40	1.22	0.31
6:21	22860.00	4.6	3.68	66894.00	1.54	53515.20	1.23	0.31
6:22	22920.00	4.6	3.68	67170.00	1.54	53736.00	1.23	0.31
6:23	22980.00	4.6	3.68	67446.00	1.55	53956.80	1.24	0.31
6:24	23040.00	4.6	3.68	67722.00	1.55	54177.60	1.24	0.31
6:25	23100.00	4.6	3.68	67998.00	1.56	54398.40	1.25	0.31
6:26	23160.00	4.6	3.68	68274.00	1.57	54619.20	1.25	0.31
6:27	23220.00	4.6	3.68	68550.00	1.57	54840.00	1.26	0.31
6:28	23280.00	4.6	3.68	68826.00	1.58	55060.80	1.26	0.32
6:29	23340.00	4.6	3.68	69102.00	1.59	55281.60	1.27	0.32
6:30	23400.00	4.6	3.68	69378.00	1.59	55502.40	1.27	0.32
6:31	23460.00	4.6	3.68	69654.00	1.60	55723.20	1.28	0.32
6:32	23520.00	4.7	3.76	69930.00	1.61	55944.00	1.28	0.32
6:33	23580.00	4.7	3.76	70215.00	1.61	56172.00	1.29	0.32
6:34	23640.00	4.7	3.76	70497.00	1.62	56397.60	1.29	0.32
6:35	23700.00	4.7	3.76	70779.00	1.62	56623.20	1.30	0.32
6:36	23760.00	4.7	3.76	71061.00	1.63	56848.80	1.31	0.33
6:37	23820.00	4.7	3.76	71343.00	1.64	57074.40	1.31	0.33
6:38	23880.00	4.7	3.76	71625.00	1.64	57300.00	1.32	0.33
6:39	23940.00	4.7	3.76	71907.00	1.65	57525.60	1.32	0.33
6:40	24000.00	4.7	3.76	72189.00	1.66	57751.20	1.33	0.33
6:41	24060.00	4.7	3.76	72471.00	1.66	57976.80	1.33	0.33
6:42	24120.00	4.8	3.84	72756.00	1.67	58204.80	1.34	0.33
6:43	24180.00	4.8	3.84	73044.00	1.68	58435.20	1.34	0.34
6:44	24240.00	4.8	3.84	73332.00	1.68	58665.60	1.35	0.34
6:45	24300.00	4.8	3.84	73620.00	1.69	58896.00	1.35	0.34
6:46	24360.00	4.8	3.84	73908.00	1.70	59126.40	1.36	0.34
6:47	24420.00	4.8	3.84	74196.00	1.70	59356.80	1.36	0.34
6:48	24480.00	4.8	3.84	74484.00	1.71	59587.20	1.37	0.34
6:49	24540.00	4.8	3.84	74772.00	1.72	59817.60	1.37	0.34
6:50	24600.00	4.9	3.92	75063.00	1.72	60050.40	1.38	0.34
6:51	24660.00	4.9	3.92	75357.00	1.73	60285.60	1.38	0.35
6:52	24720.00	4.9	3.92	75651.00	1.74	60520.80	1.39	0.35
6:53	24780.00	4.9	3.92	75945.00	1.74	60756.00	1.39	0.35
6:54	24840.00	4.9	3.92	76239.00	1.75	60991.20	1.40	0.35
6:55	24900.00	4.9	3.92	76533.00	1.76	61226.40	1.41	0.35
6:56	24960.00	4.9	3.92	76827.00	1.76	61461.60	1.41	0.35
6:57	25020.00	4.9	3.92	77121.00	1.77	61696.80	1.42	0.35
6:58	25080.00	4.9	3.92	77415.00	1.78	61932.00	1.42	0.36
6:59	25140.00	4.9	3.92	77709.00	1.78	62167.20	1.43	0.36
7:00	25200.00	4.9	3.92	78003.00	1.79	62402.40	1.43	0.36
7:01	25260.00	5	4	78300.00	1.80	62640.00	1.44	0.36
7:02	25320.00	5	4	78600.00	1.80	62880.00	1.44	0.36
7:03	25380.00	5	4	78900.00	1.81	63120.00	1.45	0.36
7:04	25440.00	5	4	79200.00	1.82	63360.00	1.45	0.36
7:05	25500.00	5	4	79500.00	1.83	63600.00	1.46	0.37
7:06	25560.00	5	4	79800.00	1.83	63840.00	1.47	0.37
7:07	25620.00	5	4	80100.00	1.84	64080.00	1.47	0.37
7:08	25680.00	5	4	80400.00	1.85	64320.00	1.48	0.37
7:09	25740.00	5.1	4.08	80703.00	1.85	64562.40	1.48	0.37
7:10	25800.00	5.1	4.08	81009.00	1.86	64807.20	1.49	0.37
7:11	25860.00	5.1	4.08	81315.00	1.87	65052.00	1.49	0.37
7:12	25920.00	5.1	4.08	81621.00	1.87	65296.80	1.50	0.37
7:13	25980.00	5.1	4.08	81927.00	1.88	65541.60	1.50	0.38
7:14	26040.00	5.1	4.08	82233.00	1.89	65786.40	1.51	0.38
7:15	26100.00	5.1	4.08	82539.00	1.89	66031.20	1.52	0.38
7:16	26160.00	5.1	4.08	82845.00	1.90	66276.00	1.52	0.38
7:17	26220.00	5.1	4.08	83151.00	1.91	66520.80	1.53	0.38
7:18	26280.00	5.2	4.16	83460.00	1.92	66768.00	1.53	0.38
7:19	26340.00	5.2	4.16	83772.00	1.92	67017.60	1.54	0.38
7:20	26400.00	5.2	4.16	84084.00	1.93	67267.20	1.54	0.39
7:21	26460.00	5.2	4.16	84396.00	1.94	67516.80	1.55	0.39
7:22	26520.00	5.2	4.16	84708.00	1.94	67766.40	1.56	0.39
7:23	26580.00	5.2	4.16	85020.00	1.95	68016.00	1.56	0.39
7:24	26640.00	5.2	4.16	85332.00	1.96	68265.60	1.57	0.39
7:25	26700.00	5.3	4.24	85647.00	1.97	68517.60	1.57	0.39
7:26	26760.00	5.3	4.24	85965.00	1.97	68772.00	1.58	0.39
7:27	26820.00	5.3	4.24	86283.00	1.98	69026.40	1.58	0.40
7:28	26880.00	5.3	4.24	86601.00	1.99	69280.80	1.59	0.40
7:29	26940.00	5.3	4.24	86919.00	2.00	69535.20	1.60	0.40
7:30	27000.00	5.3	4.24	87237.00	2.00	69789.60	1.60	0.40
7:31	27060.00	5.3	4.24	87555.00	2.01	70044.00	1.61	0.40
7:32	27120.00	5.3	4.24	87873.00	2.02	70298.40	1.61	0.40
7:33	27180.00	5.3	4.24	88191.00	2.02	70552.80	1.62	0.40
7:34	27240.00	5.3	4.24	88509.00	2.03	70807.20	1.63	0.41
7:35	27300.00	5.3	4.24	88827.00	2.04	71061.60	1.63	0.41
7:36	27360.00	5.3	4.24	89145.00	2.05	71316.00	1.64	0.41
7:37	27420.00	5.3	4.24	89463.00	2.05	71570.40	1.64	0.41
7:38	27480.00	5.3	4.24	89781.00	2.06	71824.80	1.65	0.41
7:39	27540.00	5.3	4.24	90099.00	2.07	72079.20	1.65	0.41
7:40	27600.00	5.4	4.32	90420.00	2.08	72333.60	1.66	0.42
7:41	27660.00	5.4	4.32	90744.00	2.08	72595.20	1.67	0.42
7:42	27720.00	5.4	4.32	91068.00	2.09	72854.40	1.67	0.42
7:43	27780.00	5.4	4.32	91392.00	2.10	73113.60	1.68	0.42
7:44	27840.00	5.4	4.32	91716.00	2.11	73372.80	1.68	0.42
7:45	27900.00	5.4	4.32	92040.00	2.11	73632.00	1.69	0.42
7:46	27960.00	5.4	4.32	92364.00	2.12	73891.20	1.70	0.42
7:47	28020.00	5.4	4.32	92688.00	2.13	74150.40	1.70	0.43
7:48	28080.00	5.4	4.32	93012.00	2.14	74409.60	1.71	0.43
7:49	28140.00	5.4	4.32	93336.00	2.14	74668.80	1.71	0.43
7:50	28200.00	5.4	4.32	93660.00	2.15	74928.00	1.72	0.43
7:51	28260.00	5.4	4.32	93984.00	2.16	75187.20	1.73	0.43
7:52	28320.00	5.4	4.32	94308.00	2.17	75446.40	1.73	0.43
7:53	28380.00	5.4	4.32	94632.00	2.17	75705.60	1.74	0.43

7:54	28440.00	5.4	4.32	94956.00	2.18	75964.80	1.74	0.44
7:55	28500.00	5.4	4.32	95280.00	2.19	76224.00	1.75	0.44
7:56	28560.00	5.4	4.32	95604.00	2.19	76483.20	1.76	0.44
7:57	28620.00	5.4	4.32	95928.00	2.20	76742.40	1.76	0.44
7:58	28680.00	5.4	4.32	96252.00	2.21	77001.60	1.77	0.44
7:59	28740.00	5.4	4.32	96576.00	2.22	77260.80	1.77	0.44
8:00	28800.00	5.4	4.32	96900.00	2.22	77520.00	1.78	0.44
8:01	28860.00	5.4	4.32	97224.00	2.23	77779.20	1.79	0.45
8:02	28920.00	5.4	4.32	97548.00	2.24	78038.40	1.79	0.45
8:03	28980.00	5.4	4.32	97872.00	2.25	78297.60	1.80	0.45
8:04	29040.00	5.4	4.32	98196.00	2.25	78556.80	1.80	0.45
8:05	29100.00	5.4	4.32	98520.00	2.26	78816.00	1.81	0.45
8:06	29160.00	5.4	4.32	98844.00	2.27	79075.20	1.82	0.45
8:07	29220.00	5.5	4.4	99171.00	2.28	79336.80	1.82	0.46
8:08	29280.00	5.5	4.4	99501.00	2.28	79600.80	1.83	0.46
8:09	29340.00	5.5	4.4	99831.00	2.29	79864.80	1.83	0.46
8:10	29400.00	5.5	4.4	100161.00	2.30	80128.80	1.84	0.46
8:11	29460.00	5.5	4.4	100491.00	2.31	80392.80	1.85	0.46
8:12	29520.00	5.5	4.4	100821.00	2.31	80656.80	1.85	0.46
8:13	29580.00	5.5	4.4	101151.00	2.32	80920.80	1.86	0.46
8:14	29640.00	5.5	4.4	101481.00	2.33	81184.80	1.86	0.47
8:15	29700.00	5.5	4.4	101811.00	2.34	81448.80	1.87	0.47
8:16	29760.00	5.5	4.4	102141.00	2.34	81712.80	1.88	0.47
8:17	29820.00	5.5	4.4	102471.00	2.35	81976.80	1.88	0.47
8:18	29880.00	5.5	4.4	102801.00	2.36	82240.80	1.89	0.47
8:19	29940.00	5.5	4.4	103131.00	2.37	82504.80	1.89	0.47
8:20	30000.00	5.5	4.4	103461.00	2.38	82768.80	1.90	0.48
8:21	30060.00	5.5	4.4	103791.00	2.38	83032.80	1.91	0.48
8:22	30120.00	5.5	4.4	104121.00	2.39	83296.80	1.91	0.48
8:23	30180.00	5.6	4.48	104454.00	2.40	83563.20	1.92	0.48
8:24	30240.00	5.6	4.48	104790.00	2.41	83832.00	1.92	0.48
8:25	30300.00	5.6	4.48	105126.00	2.41	84100.80	1.93	0.48
8:26	30360.00	5.6	4.48	105462.00	2.42	84369.60	1.94	0.48
8:27	30420.00	5.6	4.48	105798.00	2.43	84638.40	1.94	0.49
8:28	30480.00	5.6	4.48	106134.00	2.44	84907.20	1.95	0.49
8:29	30540.00	5.6	4.48	106470.00	2.44	85176.00	1.96	0.49
8:30	30600.00	5.6	4.48	106806.00	2.45	85444.80	1.96	0.49
8:31	30660.00	5.6	4.48	107142.00	2.46	85713.60	1.97	0.49
8:32	30720.00	5.7	4.56	107481.00	2.47	85984.80	1.97	0.49
8:33	30780.00	5.7	4.56	107823.00	2.48	86258.40	1.98	0.50
8:34	30840.00	5.7	4.56	108165.00	2.48	86532.00	1.99	0.50
8:35	30900.00	5.7	4.56	108507.00	2.49	86805.60	1.99	0.50
8:36	30960.00	5.7	4.56	108849.00	2.50	87079.20	2.00	0.50
8:37	31020.00	5.7	4.56	109191.00	2.51	87352.80	2.01	0.50
8:38	31080.00	5.8	4.64	109536.00	2.51	87628.80	2.01	0.50
8:39	31140.00	5.8	4.64	109884.00	2.52	87907.20	2.02	0.50
8:40	31200.00	5.8	4.64	110232.00	2.53	88185.60	2.02	0.51
8:41	31260.00	5.8	4.64	110580.00	2.54	88464.00	2.03	0.51
8:42	31320.00	5.9	4.72	110931.00	2.55	88744.80	2.04	0.51
8:43	31380.00	5.9	4.72	111285.00	2.55	89028.00	2.04	0.51
8:44	31440.00	5.9	4.72	111639.00	2.56	89311.20	2.05	0.51
8:45	31500.00	5.9	4.72	111993.00	2.57	89594.40	2.06	0.51
8:46	31560.00	6	4.8	112350.00	2.58	89880.00	2.06	0.52
8:47	31620.00	6	4.8	112710.00	2.59	90168.00	2.07	0.52
8:48	31680.00	6	4.8	113070.00	2.60	90456.00	2.08	0.52
8:49	31740.00	6	4.8	113430.00	2.60	90744.00	2.08	0.52
8:50	31800.00	6.1	4.88	113793.00	2.61	91034.40	2.09	0.52
8:51	31860.00	6.1	4.88	114159.00	2.62	91327.20	2.10	0.52
8:52	31920.00	6.1	4.88	114525.00	2.63	91620.00	2.10	0.53
8:53	31980.00	6.2	4.96	114894.00	2.64	91915.20	2.11	0.53
8:54	32040.00	6.2	4.96	115266.00	2.65	92212.80	2.12	0.53
8:55	32100.00	6.3	5.04	115641.00	2.65	92512.80	2.12	0.53
8:56	32160.00	6.3	5.04	116019.00	2.66	92815.20	2.13	0.53
8:57	32220.00	6.3	5.04	116397.00	2.67	93117.60	2.14	0.53
8:58	32280.00	6.4	5.12	116778.00	2.68	93422.40	2.14	0.54
8:59	32340.00	6.4	5.12	117162.00	2.69	93729.60	2.15	0.54
9:00	32400.00	6.5	5.2	117549.00	2.70	94039.20	2.16	0.54
9:01	32460.00	6.5	5.2	117939.00	2.71	94351.20	2.17	0.54
9:02	32520.00	6.5	5.2	118329.00	2.72	94663.20	2.17	0.54
9:03	32580.00	6.6	5.28	118722.00	2.73	94977.60	2.18	0.55
9:04	32640.00	6.6	5.28	119118.00	2.73	95294.40	2.19	0.55
9:05	32700.00	6.7	5.36	119517.00	2.74	95613.60	2.19	0.55
9:06	32760.00	6.7	5.36	119919.00	2.75	95935.20	2.20	0.55
9:07	32820.00	6.7	5.36	120321.00	2.76	96256.80	2.21	0.55
9:08	32880.00	6.8	5.44	120726.00	2.77	96580.80	2.22	0.55
9:09	32940.00	6.8	5.44	121134.00	2.78	96907.20	2.22	0.56
9:10	33000.00	6.8	5.44	121542.00	2.79	97233.60	2.23	0.56
9:11	33060.00	6.9	5.52	121953.00	2.80	97562.40	2.24	0.56
9:12	33120.00	6.9	5.52	122367.00	2.81	97893.60	2.25	0.56
9:13	33180.00	6.9	5.52	122781.00	2.82	98224.80	2.25	0.56
9:14	33240.00	7	5.6	123198.00	2.83	98558.40	2.26	0.57
9:15	33300.00	7	5.6	123618.00	2.84	98894.40	2.27	0.57
9:16	33360.00	7	5.6	124038.00	2.85	99230.40	2.28	0.57
9:17	33420.00	7.1	5.68	124461.00	2.86	99568.80	2.29	0.57
9:18	33480.00	7.1	5.68	124887.00	2.87	99909.60	2.29	0.57
9:19	33540.00	7.2	5.76	125316.00	2.88	100252.80	2.30	0.58
9:20	33600.00	7.2	5.76	125748.00	2.89	100598.40	2.31	0.58
9:21	33660.00	7.3	5.84	126183.00	2.90	100946.40	2.32	0.58
9:22	33720.00	7.3	5.84	126621.00	2.91	101296.80	2.33	0.58
9:23	33780.00	7.4	5.92	127062.00	2.92	101649.60	2.33	0.58
9:24	33840.00	7.4	5.92	127506.00	2.93	102004.80	2.34	0.59
9:25	33900.00	7.5	6	127953.00	2.94	102362.40	2.35	0.59
9:26	33960.00	7.6	6.08	128406.00	2.95	102724.80	2.36	0.59
9:27	34020.00	7.6	6.08	128862.00	2.96	103089.60	2.37	0.59
9:28	34080.00	7.7	6.16	129321.00	2.97	103456.80	2.38	0.59
9:29	34140.00	7.7	6.16	129783.00	2.98	103826.40	2.38	0.60

9:30	34200.00	7.8	6.24	130248.00	2.99	104198.40	2.39	0.60
9:31	34260.00	7.8	6.24	130716.00	3.00	104572.80	2.40	0.60
9:32	34320.00	7.9	6.32	131187.00	3.01	104949.60	2.41	0.60
9:33	34380.00	8	6.4	131664.00	3.02	105331.20	2.42	0.60
9:34	34440.00	8	6.4	132144.00	3.03	105715.20	2.43	0.61
9:35	34500.00	8.1	6.48	132627.00	3.04	106101.60	2.44	0.61
9:36	34560.00	8.1	6.48	133113.00	3.06	106490.40	2.44	0.61
9:37	34620.00	8.2	6.56	133602.00	3.07	106881.60	2.45	0.61
9:38	34680.00	8.3	6.64	134097.00	3.08	107277.60	2.46	0.62
9:39	34740.00	8.3	6.64	134595.00	3.09	107676.00	2.47	0.62
9:40	34800.00	8.4	6.72	135096.00	3.10	108076.80	2.48	0.62
9:41	34860.00	8.4	6.72	135600.00	3.11	108480.00	2.49	0.62
9:42	34920.00	8.5	6.8	136107.00	3.12	108885.60	2.50	0.62
9:43	34980.00	8.6	6.88	136620.00	3.14	109296.00	2.51	0.63
9:44	35040.00	8.6	6.88	137136.00	3.15	109708.80	2.52	0.63
9:45	35100.00	8.7	6.96	137655.00	3.16	110124.00	2.53	0.63
9:46	35160.00	8.8	7.04	138180.00	3.17	110544.00	2.54	0.63
9:47	35220.00	8.8	7.04	138708.00	3.18	110966.40	2.55	0.64
9:48	35280.00	8.9	7.12	139239.00	3.20	111391.20	2.56	0.64
9:49	35340.00	9	7.2	139776.00	3.21	111820.80	2.57	0.64
9:50	35400.00	9	7.2	140316.00	3.22	112252.80	2.58	0.64
9:51	35460.00	9.1	7.28	140859.00	3.23	112687.20	2.59	0.65
9:52	35520.00	9.2	7.36	141408.00	3.25	113126.40	2.60	0.65
9:53	35580.00	9.3	7.44	141963.00	3.26	113570.40	2.61	0.65
9:54	35640.00	9.3	7.44	142521.00	3.27	114016.80	2.62	0.65
9:55	35700.00	9.4	7.52	143082.00	3.28	114465.60	2.63	0.66
9:56	35760.00	9.5	7.6	143649.00	3.30	114919.20	2.64	0.66
9:57	35820.00	9.6	7.68	144222.00	3.31	115377.60	2.65	0.66
9:58	35880.00	9.6	7.68	144798.00	3.32	115838.40	2.66	0.66
9:59	35940.00	9.7	7.76	145377.00	3.34	116301.60	2.67	0.67
10:00	36000.00	9.8	7.84	145962.00	3.35	116769.60	2.68	0.67
10:01	36060.00	9.9	7.92	146553.00	3.36	117242.40	2.69	0.67
10:02	36120.00	10	8	147150.00	3.38	117720.00	2.70	0.68
10:03	36180.00	10.1	8.08	147753.00	3.39	118202.40	2.71	0.68
10:04	36240.00	10.2	8.16	148362.00	3.41	118689.60	2.72	0.68
10:05	36300.00	10.3	8.24	148977.00	3.42	119181.60	2.74	0.68
10:06	36360.00	10.4	8.32	149598.00	3.43	119678.40	2.75	0.69
10:07	36420.00	10.5	8.4	150225.00	3.45	120180.00	2.76	0.69
10:08	36480.00	10.6	8.48	150858.00	3.46	120686.40	2.77	0.69
10:09	36540.00	10.7	8.56	151497.00	3.48	121197.60	2.78	0.70
10:10	36600.00	10.8	8.64	152142.00	3.49	121713.60	2.79	0.70
10:11	36660.00	10.9	8.72	152793.00	3.51	122234.40	2.81	0.70
10:12	36720.00	11	8.8	153450.00	3.52	122760.00	2.82	0.70
10:13	36780.00	11.1	8.88	154113.00	3.54	123290.40	2.83	0.71
10:14	36840.00	11.2	8.96	154782.00	3.55	123825.60	2.84	0.71
10:15	36900.00	11.3	9.04	155457.00	3.57	124365.60	2.86	0.71
10:16	36960.00	11.4	9.12	156138.00	3.58	124910.40	2.87	0.72
10:17	37020.00	11.6	9.28	156828.00	3.60	125462.40	2.88	0.72
10:18	37080.00	11.7	9.36	157527.00	3.62	126021.60	2.89	0.72
10:19	37140.00	11.8	9.44	158232.00	3.63	126585.60	2.91	0.73
10:20	37200.00	11.9	9.52	158943.00	3.65	127154.40	2.92	0.73
10:21	37260.00	12	9.6	159660.00	3.67	127728.00	2.93	0.73
10:22	37320.00	12.1	9.68	160383.00	3.68	128306.40	2.95	0.74
10:23	37380.00	12.3	9.84	161115.00	3.70	128892.00	2.96	0.74
10:24	37440.00	12.4	9.92	161856.00	3.72	129484.80	2.97	0.74
10:25	37500.00	12.5	10	162603.00	3.73	130082.40	2.99	0.75
10:26	37560.00	12.6	10.08	163356.00	3.75	130684.80	3.00	0.75
10:27	37620.00	12.8	10.24	164118.00	3.77	131294.40	3.01	0.75
10:28	37680.00	12.9	10.32	164889.00	3.79	131911.20	3.03	0.76
10:29	37740.00	13	10.4	165666.00	3.80	132532.80	3.04	0.76
10:30	37800.00	13.2	10.56	166452.00	3.82	133161.60	3.06	0.76
10:31	37860.00	13.3	10.64	167247.00	3.84	133797.60	3.07	0.77
10:32	37920.00	13.4	10.72	168048.00	3.86	134438.40	3.09	0.77
10:33	37980.00	13.6	10.88	168858.00	3.88	135086.40	3.10	0.78
10:34	38040.00	13.7	10.96	169677.00	3.90	135741.60	3.12	0.78
10:35	38100.00	13.9	11.12	170505.00	3.91	136404.00	3.13	0.78
10:36	38160.00	14.1	11.28	171345.00	3.93	137076.00	3.15	0.79
10:37	38220.00	14.3	11.44	172197.00	3.95	137757.60	3.16	0.79
10:38	38280.00	14.5	11.6	173061.00	3.97	138448.80	3.18	0.79
10:39	38340.00	14.6	11.68	173934.00	3.99	139147.20	3.19	0.80
10:40	38400.00	14.8	11.84	174816.00	4.01	139852.80	3.21	0.80
10:41	38460.00	15	12	175710.00	4.03	140568.00	3.23	0.81
10:42	38520.00	15.2	12.16	176616.00	4.05	141292.80	3.24	0.81
10:43	38580.00	15.4	12.32	177534.00	4.08	142027.20	3.26	0.82
10:44	38640.00	15.6	12.48	178464.00	4.10	142771.20	3.28	0.82
10:45	38700.00	15.8	12.64	179406.00	4.12	143524.80	3.29	0.82
10:46	38760.00	16	12.8	180360.00	4.14	144288.00	3.31	0.83
10:47	38820.00	16.2	12.96	181326.00	4.16	145060.80	3.33	0.83
10:48	38880.00	16.5	13.2	182307.00	4.19	145845.60	3.35	0.84
10:49	38940.00	16.7	13.36	183303.00	4.21	146642.40	3.37	0.84
10:50	39000.00	17	13.6	184314.00	4.23	147451.20	3.39	0.85
10:51	39060.00	17.2	13.76	185340.00	4.25	148272.00	3.40	0.85
10:52	39120.00	17.5	14	186381.00	4.28	149104.80	3.42	0.86
10:53	39180.00	17.8	14.24	187440.00	4.30	149952.00	3.44	0.86
10:54	39240.00	18	14.4	188514.00	4.33	150811.20	3.46	0.87
10:55	39300.00	18.3	14.64	189603.00	4.35	151682.40	3.48	0.87
10:56	39360.00	18.6	14.88	190710.00	4.38	152568.00	3.50	0.88
10:57	39420.00	18.9	15.12	191835.00	4.40	153468.00	3.52	0.88
10:58	39480.00	19.2	15.36	192978.00	4.43	154382.40	3.54	0.89
10:59	39540.00	19.5	15.6	194139.00	4.46	155311.20	3.57	0.89
11:00	39600.00	19.8	15.84	195318.00	4.48	156254.40	3.59	0.90
11:01	39660.00	20.1	16.08	196515.00	4.51	157212.00	3.61	0.90
11:02	39720.00	20.5	16.4	197733.00	4.54	158186.40	3.63	0.91
11:03	39780.00	20.8	16.64	198972.00	4.57	159177.60	3.65	0.91
11:04	39840.00	21.1	16.88	200229.00	4.60	160183.20	3.68	0.92
11:05	39900.00	21.5	17.2	201507.00	4.63	161205.60	3.70	0.93

11:06	39960.00	21.8	17.44	202806.00	4.66	162244.80	3.72	0.93
11:07	40020.00	22.2	17.76	204126.00	4.69	163300.80	3.75	0.94
11:08	40080.00	22.6	18.08	205470.00	4.72	164376.00	3.77	0.94
11:09	40140.00	22.9	18.32	206835.00	4.75	165468.00	3.80	0.95
11:10	40200.00	23.3	18.64	208221.00	4.78	166576.80	3.82	0.96
11:11	40260.00	23.7	18.96	209631.00	4.81	167704.80	3.85	0.96
11:12	40320.00	24.1	19.28	211065.00	4.85	168852.00	3.88	0.97
11:13	40380.00	24.5	19.6	212523.00	4.88	170018.40	3.90	0.98
11:14	40440.00	25	20	214008.00	4.91	171206.40	3.93	0.98
11:15	40500.00	25.4	20.32	215520.00	4.95	172416.00	3.96	0.99
11:16	40560.00	25.8	20.64	217056.00	4.98	173644.80	3.99	1.00
11:17	40620.00	26.3	21.04	218619.00	5.02	174895.20	4.02	1.00
11:18	40680.00	26.7	21.36	220209.00	5.06	176167.20	4.04	1.01
11:19	40740.00	27.2	21.76	221826.00	5.09	177460.80	4.07	1.02
11:20	40800.00	27.7	22.16	223473.00	5.13	178778.40	4.10	1.03
11:21	40860.00	28.2	22.56	225150.00	5.17	180120.00	4.13	1.03
11:22	40920.00	28.8	23.04	226860.00	5.21	181488.00	4.17	1.04
11:23	40980.00	29.3	23.44	228603.00	5.25	182882.40	4.20	1.05
11:24	41040.00	29.9	23.92	230379.00	5.29	184303.20	4.23	1.06
11:25	41100.00	30.5	24.4	232191.00	5.33	185752.80	4.26	1.07
11:26	41160.00	31	24.8	234036.00	5.37	187228.80	4.30	1.07
11:27	41220.00	31.6	25.28	235914.00	5.42	188731.20	4.33	1.08
11:28	41280.00	32.2	25.76	237828.00	5.46	190262.40	4.37	1.09
11:29	41340.00	32.8	26.24	239778.00	5.50	191822.40	4.40	1.10
11:30	41400.00	33.4	26.72	241764.00	5.55	193411.20	4.44	1.11
11:31	41460.00	34	27.2	243786.00	5.60	195028.80	4.48	1.12
11:32	41520.00	34.6	27.68	245844.00	5.64	196675.20	4.52	1.13
11:33	41580.00	35.5	28.4	247947.00	5.69	198357.60	4.55	1.14
11:34	41640.00	36.6	29.28	250110.00	5.74	200088.00	4.59	1.15
11:35	41700.00	37.9	30.32	252345.00	5.79	201876.00	4.63	1.16
11:36	41760.00	39.5	31.6	254667.00	5.85	203733.60	4.68	1.17
11:37	41820.00	41.2	32.96	257088.00	5.90	205670.40	4.72	1.18
11:38	41880.00	42.9	34.32	259611.00	5.96	207688.80	4.77	1.19
11:39	41940.00	44.7	35.76	262239.00	6.02	209791.20	4.82	1.20
11:40	42000.00	46.6	37.28	264978.00	6.08	211982.40	4.87	1.22
11:41	42060.00	48.4	38.72	267828.00	6.15	214262.40	4.92	1.23
11:42	42120.00	50.4	40.32	270792.00	6.22	216633.60	4.97	1.24
11:43	42180.00	52.4	41.92	273876.00	6.29	219100.80	5.03	1.26
11:44	42240.00	54.5	43.6	277083.00	6.36	221666.40	5.09	1.27
11:45	42300.00	56.7	45.36	280419.00	6.44	224335.20	5.15	1.29
11:46	42360.00	59	47.2	283890.00	6.52	227112.00	5.21	1.30
11:47	42420.00	61.7	49.36	287511.00	6.60	230008.80	5.28	1.32
11:48	42480.00	64.9	51.92	291309.00	6.69	233047.20	5.35	1.34
11:49	42540.00	68.8	55.04	295320.00	6.78	236256.00	5.42	1.36
11:50	42600.00	73.8	59.04	299598.00	6.88	239678.40	5.50	1.38
11:51	42660.00	79.5	63.6	304197.00	6.98	243357.60	5.59	1.40
11:52	42720.00	85.7	68.56	309153.00	7.10	247322.40	5.68	1.42
11:53	42780.00	92.2	73.76	314490.00	7.22	251592.00	5.78	1.44
11:54	42840.00	99.1	79.28	320229.00	7.35	256183.20	5.88	1.47
11:55	42900.00	106.2	84.96	326388.00	7.49	261110.40	5.99	1.50
11:56	42960.00	113.6	90.88	332982.00	7.64	266385.60	6.12	1.53
11:57	43020.00	121.4	97.12	340032.00	7.81	272025.60	6.24	1.56
11:58	43080.00	129.6	103.68	347562.00	7.98	278049.60	6.38	1.60
11:59	43140.00	138.3	110.64	355599.00	8.16	284479.20	6.53	1.63
12:00	43200.00	147.5	118	364173.00	8.36	291338.40	6.69	1.67
12:01	43260.00	157.2	125.76	373314.00	8.57	298651.20	6.86	1.71
12:02	43320.00	167.1	133.68	383043.00	8.79	306434.40	7.03	1.76
12:03	43380.00	176.6	141.28	393354.00	9.03	314683.20	7.22	1.81
12:04	43440.00	185.2	148.16	404208.00	9.28	323366.40	7.42	1.86
12:05	43500.00	193	154.4	415554.00	9.54	332443.20	7.63	1.91
12:06	43560.00	200.3	160.24	427353.00	9.81	341882.40	7.85	1.96
12:07	43620.00	207.6	166.08	439590.00	10.09	351672.00	8.07	2.02
12:08	43680.00	215.4	172.32	452280.00	10.38	361824.00	8.31	2.08
12:09	43740.00	223.8	179.04	465456.00	10.69	372364.80	8.55	2.14
12:10	43800.00	232.9	186.32	479157.00	11.00	383325.60	8.80	2.20
12:11	43860.00	242.5	194	493419.00	11.33	394735.20	9.06	2.27
12:12	43920.00	252.5	202	508269.00	11.67	406615.20	9.33	2.33
12:13	43980.00	262.7	210.16	523725.00	12.02	418980.00	9.62	2.40
12:14	44040.00	273.2	218.56	539802.00	12.39	431841.60	9.91	2.48
12:15	44100.00	283.9	227.12	556515.00	12.78	445212.00	10.22	2.56
12:16	44160.00	294.8	235.84	573876.00	13.17	459100.80	10.54	2.63
12:17	44220.00	305.8	244.64	591894.00	13.59	473515.20	10.87	2.72
12:18	44280.00	316.8	253.44	610572.00	14.02	488457.60	11.21	2.80
12:19	44340.00	327.9	262.32	629913.00	14.46	503930.40	11.57	2.89
12:20	44400.00	338.9	271.12	649917.00	14.92	519933.60	11.94	2.98
12:21	44460.00	349.8	279.84	670578.00	15.39	536462.40	12.32	3.08
12:22	44520.00	360.6	288.48	691890.00	15.88	553512.00	12.71	3.18
12:23	44580.00	371.2	296.96	713844.00	16.39	571075.20	13.11	3.28
12:24	44640.00	381.7	305.36	736431.00	16.91	589144.80	13.52	3.38
12:25	44700.00	391.9	313.52	759639.00	17.44	607711.20	13.95	3.49
12:26	44760.00	401.9	321.52	783453.00	17.99	626762.40	14.39	3.60
12:27	44820.00	411.4	329.12	807852.00	18.55	646281.60	14.84	3.71
12:28	44880.00	420.6	336.48	832812.00	19.12	666249.60	15.29	3.82
12:29	44940.00	429.3	343.44	858309.00	19.70	686647.20	15.76	3.94
12:30	45000.00	437.4	349.92	884310.00	20.30	707448.00	16.24	4.06
12:31	45060.00	445.1	356.08	910785.00	20.91	728628.00	16.73	4.18
12:32	45120.00	452.2	361.76	937704.00	21.53	750163.20	17.22	4.31
12:33	45180.00	458.7	366.96	965031.00	22.15	772024.80	17.72	4.43
12:34	45240.00	464.5	371.6	992727.00	22.79	794181.60	18.23	4.56
12:35	45300.00	469.8	375.84	1020756.00	23.43	816604.80	18.75	4.69
12:36	45360.00	474.4	379.52	1049082.00	24.08	839265.60	19.27	4.82
12:37	45420.00	478.6	382.88	1077672.00	24.74	862137.60	19.79	4.95
12:38	45480.00	482.2	385.76	1106496.00	25.40	885196.80	20.32	5.08
12:39	45540.00	485.1	388.08	1135515.00	26.07	908412.00	20.85	5.21
12:40	45600.00	487.5	390	1164693.00	26.74	931754.40	21.39	5.35
12:41	45660.00	489.3	391.44	1193997.00	27.41	955197.60	21.93	5.48

12:42	45720.00	490.5	392.4	1223391.00	28.09	978712.80	22.47	5.62
12:43	45780.00	491.3	393.04	1252845.00	28.76	1002276.00	23.01	5.75
12:44	45840.00	491.6	393.28	1282332.00	29.44	1025865.60	23.55	5.89
12:45	45900.00	491.4	393.12	1311822.00	30.12	1049457.60	24.09	6.02
12:46	45960.00	490.9	392.72	1341291.00	30.79	1073032.80	24.63	6.16
12:47	46020.00	489.9	391.92	1370715.00	31.47	1096572.00	25.17	6.29
12:48	46080.00	488.4	390.72	1400064.00	32.14	1120051.20	25.71	6.43
12:49	46140.00	486.6	389.28	1429314.00	32.81	1143451.20	26.25	6.56
12:50	46200.00	484.3	387.44	1458441.00	33.48	1166752.80	26.78	6.70
12:51	46260.00	481.7	385.36	1487421.00	34.15	1189936.80	27.32	6.83
12:52	46320.00	478.8	383.04	1516236.00	34.81	1212988.80	27.85	6.96
12:53	46380.00	475.5	380.4	1544865.00	35.47	1235892.00	28.37	7.09
12:54	46440.00	472	377.6	1573290.00	36.12	1258632.00	28.89	7.22
12:55	46500.00	468.4	374.72	1601502.00	36.77	1281201.60	29.41	7.35
12:56	46560.00	464.5	371.6	1629489.00	37.41	1303591.20	29.93	7.48
12:57	46620.00	460.5	368.4	1657239.00	38.04	1325791.20	30.44	7.61
12:58	46680.00	456.2	364.96	1684740.00	38.68	1347792.00	30.94	7.74
12:59	46740.00	451.9	361.52	1711983.00	39.30	1369586.40	31.44	7.86
13:00	46800.00	447.4	357.92	1738962.00	39.92	1391169.60	31.94	7.98
13:01	46860.00	442.7	354.16	1765665.00	40.53	1412532.00	32.43	8.11
13:02	46920.00	437.8	350.24	1792080.00	41.14	1433664.00	32.91	8.23
13:03	46980.00	432.8	346.24	1818198.00	41.74	1454558.40	33.39	8.35
13:04	47040.00	427.7	342.16	1844013.00	42.33	1475210.40	33.87	8.47
13:05	47100.00	422.4	337.92	1869516.00	42.92	1495612.80	34.33	8.58
13:06	47160.00	417	333.6	1894698.00	43.50	1515758.40	34.80	8.70
13:07	47220.00	411.6	329.28	1919556.00	44.07	1535644.80	35.25	8.81
13:08	47280.00	406.2	324.96	1944090.00	44.63	1555272.00	35.70	8.93
13:09	47340.00	400.6	320.48	1968294.00	45.19	1574635.20	36.15	9.04
13:10	47400.00	395.1	316.08	1992165.00	45.73	1593732.00	36.59	9.15
13:11	47460.00	389.5	311.6	2015703.00	46.27	1612562.40	37.02	9.25
13:12	47520.00	383.9	307.12	2038905.00	46.81	1631124.00	37.45	9.36
13:13	47580.00	378.3	302.64	2061771.00	47.33	1649416.80	37.87	9.47
13:14	47640.00	372.7	298.16	2084301.00	47.85	1667440.80	38.28	9.57
13:15	47700.00	367	293.6	2106492.00	48.36	1685193.60	38.69	9.67
13:16	47760.00	361.3	289.04	2128341.00	48.86	1702672.80	39.09	9.77
13:17	47820.00	355.6	284.48	2149848.00	49.35	1719878.40	39.48	9.87
13:18	47880.00	349.8	279.84	2171010.00	49.84	1736808.00	39.87	9.97
13:19	47940.00	344.1	275.28	2191827.00	50.32	1753461.60	40.25	10.06
13:20	48000.00	338.3	270.64	2212299.00	50.79	1769839.20	40.63	10.16
13:21	48060.00	332.6	266.08	2232426.00	51.25	1785940.80	41.00	10.25
13:22	48120.00	326.9	261.52	2252211.00	51.70	1801768.80	41.36	10.34
13:23	48180.00	321.2	256.96	2271654.00	52.15	1817323.20	41.72	10.43
13:24	48240.00	315.6	252.48	2290758.00	52.59	1832606.40	42.07	10.52
13:25	48300.00	310.1	248.08	2309529.00	53.02	1847623.20	42.42	10.60
13:26	48360.00	304.6	243.68	2327970.00	53.44	1862376.00	42.75	10.69
13:27	48420.00	299.3	239.44	2346087.00	53.86	1876869.60	43.09	10.77
13:28	48480.00	294.1	235.28	2363889.00	54.27	1891111.20	43.41	10.85
13:29	48540.00	289.1	231.28	2381385.00	54.67	1905108.00	43.74	10.93
13:30	48600.00	284.1	227.28	2398581.00	55.06	1918864.80	44.05	11.01
13:31	48660.00	279.4	223.52	2415486.00	55.45	1932388.80	44.36	11.09
13:32	48720.00	274.7	219.76	2432109.00	55.83	1945687.20	44.67	11.17
13:33	48780.00	270.2	216.16	2448456.00	56.21	1958764.80	44.97	11.24
13:34	48840.00	265.7	212.56	2464533.00	56.58	1971626.40	45.26	11.32
13:35	48900.00	261.4	209.12	2480346.00	56.94	1984276.80	45.55	11.39
13:36	48960.00	257.2	205.76	2495904.00	57.30	1996723.20	45.84	11.46
13:37	49020.00	253	202.4	2511210.00	57.65	2008968.00	46.12	11.53
13:38	49080.00	249	199.2	2526270.00	58.00	2021016.00	46.40	11.60
13:39	49140.00	245.1	196.08	2541093.00	58.34	2032874.40	46.67	11.67
13:40	49200.00	241.3	193.04	2555685.00	58.67	2044548.00	46.94	11.73
13:41	49260.00	237.5	190	2570049.00	59.00	2056039.20	47.20	11.80
13:42	49320.00	233.8	187.04	2584188.00	59.32	2067350.40	47.46	11.86
13:43	49380.00	230.3	184.24	2598111.00	59.64	2078488.80	47.72	11.93
13:44	49440.00	226.8	181.44	2611824.00	59.96	2089459.20	47.97	11.99
13:45	49500.00	223.4	178.72	2625330.00	60.27	2100264.00	48.22	12.05
13:46	49560.00	220	176	2638632.00	60.57	2110905.60	48.46	12.11
13:47	49620.00	216.8	173.44	2651736.00	60.88	2121388.80	48.70	12.18
13:48	49680.00	213.6	170.88	2664648.00	61.17	2131718.40	48.94	12.23
13:49	49740.00	210.5	168.4	2677371.00	61.46	2141896.80	49.17	12.29
13:50	49800.00	207.5	166	2689911.00	61.75	2151928.80	49.40	12.35
13:51	49860.00	204.5	163.6	2702271.00	62.04	2161816.80	49.63	12.41
13:52	49920.00	201.6	161.28	2714454.00	62.32	2171563.20	49.85	12.46
13:53	49980.00	198.8	159.04	2726466.00	62.59	2181172.80	50.07	12.52
13:54	50040.00	196	156.8	2738310.00	62.86	2190648.00	50.29	12.57
13:55	50100.00	193.3	154.64	2749989.00	63.13	2199991.20	50.50	12.63
13:56	50160.00	190.6	152.48	2761506.00	63.40	2209204.80	50.72	12.68
13:57	50220.00	188	150.4	2772864.00	63.66	2218291.20	50.92	12.73
13:58	50280.00	185.4	148.32	2784066.00	63.91	2227252.80	51.13	12.78
13:59	50340.00	182.8	146.24	2795112.00	64.17	2236089.60	51.33	12.83
14:00	50400.00	180.3	144.24	2806005.00	64.42	2244804.00	51.53	12.88
14:01	50460.00	177.8	142.24	2816748.00	64.66	2253398.40	51.73	12.93
14:02	50520.00	175.4	140.32	2827344.00	64.91	2261875.20	51.93	12.98
14:03	50580.00	173	138.4	2837796.00	65.15	2270236.80	52.12	13.03
14:04	50640.00	170.7	136.56	2848107.00	65.38	2278485.60	52.31	13.08
14:05	50700.00	168.4	134.72	2858280.00	65.62	2286624.00	52.49	13.12
14:06	50760.00	166.1	132.88	2868315.00	65.85	2294652.00	52.68	13.17
14:07	50820.00	163.8	131.04	2878212.00	66.07	2302569.60	52.86	13.21
14:08	50880.00	161.7	129.36	2887977.00	66.30	2310381.60	53.04	13.26
14:09	50940.00	159.5	127.6	2897613.00	66.52	2318090.40	53.22	13.30
14:10	51000.00	157.4	125.92	2907120.00	66.74	2325696.00	53.39	13.35
14:11	51060.00	155.3	124.24	2916501.00	66.95	2333200.80	53.56	13.39
14:12	51120.00	153.3	122.64	2925759.00	67.17	2340607.20	53.73	13.43
14:13	51180.00	151.3	121.04	2934897.00	67.38	2347917.60	53.90	13.48
14:14	51240.00	149.4	119.52	2943918.00	67.58	2355134.40	54.07	13.52
14:15	51300.00	147.5	118	2952825.00	67.79	2362260.00	54.23	13.56
14:16	51360.00	145.7	116.56	2961621.00	67.99	2369296.80	54.39	13.60
14:17	51420.00	143.9	115.12	2970309.00	68.19	2376247.20	54.55	13.64

14:18	51480.00	142.2	113.76	2978892.00	68.39	2383113.60	54.71	13.68
14:19	51540.00	140.4	112.32	2987370.00	68.58	2389896.00	54.86	13.72
14:20	51600.00	138.7	110.96	2995743.00	68.77	2396594.40	55.02	13.75
14:21	51660.00	137	109.6	3004014.00	68.96	2403211.20	55.17	13.79
14:22	51720.00	135.3	108.24	3012183.00	69.15	2409746.40	55.32	13.83
14:23	51780.00	133.7	106.96	3020253.00	69.34	2416202.40	55.47	13.87
14:24	51840.00	132.1	105.68	3028227.00	69.52	2422581.60	55.61	13.90
14:25	51900.00	130.5	104.4	3036105.00	69.70	2428884.00	55.76	13.94
14:26	51960.00	128.9	103.12	3043887.00	69.88	2435109.60	55.90	13.98
14:27	52020.00	127.4	101.92	3051576.00	70.05	2441260.80	56.04	14.01
14:28	52080.00	125.9	100.72	3059175.00	70.23	2447340.00	56.18	14.05
14:29	52140.00	124.4	99.52	3066684.00	70.40	2453347.20	56.32	14.08
14:30	52200.00	123	98.4	3074106.00	70.57	2459284.80	56.46	14.11
14:31	52260.00	121.5	97.2	3081441.00	70.74	2465152.80	56.59	14.15
14:32	52320.00	120.1	96.08	3088689.00	70.91	2470951.20	56.73	14.18
14:33	52380.00	118.7	94.96	3095853.00	71.07	2476682.40	56.86	14.21
14:34	52440.00	117.4	93.92	3102936.00	71.23	2482348.80	56.99	14.25
14:35	52500.00	116	92.8	3109938.00	71.39	2487950.40	57.12	14.28
14:36	52560.00	114.7	91.76	3116859.00	71.55	2493487.20	57.24	14.31
14:37	52620.00	113.5	90.8	3123705.00	71.71	2498964.00	57.37	14.34
14:38	52680.00	112.2	89.76	3130476.00	71.87	2504380.80	57.49	14.37
14:39	52740.00	111	88.8	3137172.00	72.02	2509737.60	57.62	14.40
14:40	52800.00	109.8	87.84	3143796.00	72.17	2515036.80	57.74	14.43
14:41	52860.00	108.6	86.88	3150348.00	72.32	2520278.40	57.86	14.46
14:42	52920.00	107.5	86	3156831.00	72.47	2525464.80	57.98	14.49
14:43	52980.00	106.3	85.04	3163245.00	72.62	2530596.00	58.09	14.52
14:44	53040.00	105.2	84.16	3169590.00	72.76	2535672.00	58.21	14.55
14:45	53100.00	104.1	83.28	3175869.00	72.91	2540695.20	58.33	14.58
14:46	53160.00	103	82.4	3182082.00	73.05	2545665.60	58.44	14.61
14:47	53220.00	101.9	81.52	3188229.00	73.19	2550583.20	58.55	14.64
14:48	53280.00	100.8	80.64	3194310.00	73.33	2555448.00	58.67	14.67
14:49	53340.00	99.8	79.84	3200328.00	73.47	2560262.40	58.78	14.69
14:50	53400.00	98.7	78.96	3206283.00	73.61	2565026.40	58.88	14.72
14:51	53460.00	97.7	78.16	3212175.00	73.74	2569740.00	58.99	14.75
14:52	53520.00	96.7	77.36	3218007.00	73.88	2574405.60	59.10	14.78
14:53	53580.00	95.7	76.56	3223779.00	74.01	2579023.20	59.21	14.80
14:54	53640.00	94.7	75.76	3229491.00	74.14	2583592.80	59.31	14.83
14:55	53700.00	93.7	74.96	3235143.00	74.27	2588114.40	59.41	14.85
14:56	53760.00	92.8	74.24	3240738.00	74.40	2592590.40	59.52	14.88
14:57	53820.00	91.9	73.52	3246279.00	74.52	2597023.20	59.62	14.90
14:58	53880.00	91	72.8	3251766.00	74.65	2601412.80	59.72	14.93
14:59	53940.00	90.1	72.08	3257199.00	74.78	2605759.20	59.82	14.96
15:00	54000.00	89.3	71.44	3262581.00	74.90	2610064.80	59.92	14.98
15:01	54060.00	88.5	70.8	3267915.00	75.02	2614332.00	60.02	15.00
15:02	54120.00	87.7	70.16	3273201.00	75.14	2618560.80	60.11	15.03
15:03	54180.00	86.9	69.52	3278439.00	75.26	2622751.20	60.21	15.05
15:04	54240.00	86.1	68.88	3283629.00	75.38	2626903.20	60.31	15.08
15:05	54300.00	85.4	68.32	3288774.00	75.50	2631019.20	60.40	15.10
15:06	54360.00	84.6	67.68	3293874.00	75.62	2635099.20	60.49	15.12
15:07	54420.00	83.9	67.12	3298929.00	75.73	2639143.20	60.59	15.15
15:08	54480.00	83.2	66.56	3303942.00	75.85	2643153.60	60.68	15.17
15:09	54540.00	82.5	66	3308913.00	75.96	2647130.40	60.77	15.19
15:10	54600.00	81.8	65.44	3313842.00	76.08	2651073.60	60.86	15.22
15:11	54660.00	81.2	64.96	3318732.00	76.19	2654985.60	60.95	15.24
15:12	54720.00	80.5	64.4	3323583.00	76.30	2658866.40	61.04	15.26
15:13	54780.00	79.9	63.92	3328395.00	76.41	2662716.00	61.13	15.28
15:14	54840.00	79.3	63.44	3333171.00	76.52	2666536.80	61.22	15.30
15:15	54900.00	78.7	62.96	3337911.00	76.63	2670328.80	61.30	15.33
15:16	54960.00	78.1	62.48	3342615.00	76.74	2674092.00	61.39	15.35
15:17	55020.00	77.5	62	3347283.00	76.84	2677826.40	61.47	15.37
15:18	55080.00	76.9	61.52	3351915.00	76.95	2681532.00	61.56	15.39
15:19	55140.00	76.3	61.04	3356511.00	77.05	2685208.80	61.64	15.41
15:20	55200.00	75.8	60.64	3361074.00	77.16	2688859.20	61.73	15.43
15:21	55260.00	75.2	60.16	3365604.00	77.26	2692483.20	61.81	15.45
15:22	55320.00	74.7	59.76	3370101.00	77.37	2696080.80	61.89	15.47
15:23	55380.00	74.1	59.28	3374565.00	77.47	2699652.00	61.98	15.49
15:24	55440.00	73.6	58.88	3378996.00	77.57	2703196.80	62.06	15.51
15:25	55500.00	73.1	58.48	3383397.00	77.67	2706717.60	62.14	15.53
15:26	55560.00	72.6	58.08	3387768.00	77.77	2710214.40	62.22	15.55
15:27	55620.00	72.1	57.68	3392109.00	77.87	2713687.20	62.30	15.57
15:28	55680.00	71.6	57.28	3396420.00	77.97	2717136.00	62.38	15.59
15:29	55740.00	71.1	56.88	3400701.00	78.07	2720560.80	62.46	15.61
15:30	55800.00	70.6	56.48	3404952.00	78.17	2723961.60	62.53	15.63
15:31	55860.00	70.1	56.08	3409173.00	78.26	2727338.40	62.61	15.65
15:32	55920.00	69.7	55.76	3413367.00	78.36	2730693.60	62.69	15.67
15:33	55980.00	69.2	55.36	3417534.00	78.46	2734027.20	62.76	15.69
15:34	56040.00	68.7	54.96	3421671.00	78.55	2737336.80	62.84	15.71
15:35	56100.00	68.3	54.64	3425781.00	78.65	2740624.80	62.92	15.73
15:36	56160.00	67.8	54.24	3429864.00	78.74	2743891.20	62.99	15.75
15:37	56220.00	67.3	53.84	3433917.00	78.83	2747133.60	63.07	15.77
15:38	56280.00	66.9	53.52	3437943.00	78.92	2750354.40	63.14	15.78
15:39	56340.00	66.4	53.12	3441942.00	79.02	2753553.60	63.21	15.80
15:40	56400.00	66	52.8	3445914.00	79.11	2756731.20	63.29	15.82
15:41	56460.00	65.5	52.4	3449859.00	79.20	2759887.20	63.36	15.84
15:42	56520.00	65.1	52.08	3453777.00	79.29	2763021.60	63.43	15.86
15:43	56580.00	64.7	51.76	3457671.00	79.38	2766136.80	63.50	15.88
15:44	56640.00	64.3	51.44	3461541.00	79.47	2769232.80	63.57	15.89
15:45	56700.00	63.9	51.12	3465387.00	79.55	2772309.60	63.64	15.91
15:46	56760.00	63.5	50.8	3469209.00	79.64	2775367.20	63.71	15.93
15:47	56820.00	63.1	50.48	3473007.00	79.73	2778405.60	63.78	15.95
15:48	56880.00	62.7	50.16	3476781.00	79.82	2781424.80	63.85	15.96
15:49	56940.00	62.3	49.84	3480531.00	79.90	2784424.80	63.92	15.98
15:50	57000.00	62	49.6	3484260.00	79.99	2787408.00	63.99	16.00
15:51	57060.00	61.6	49.28	3487968.00	80.07	2790374.40	64.06	16.01
15:52	57120.00	61.3	49.04	3491655.00	80.16	2793324.00	64.13	16.03
15:53	57180.00	61	48.8	3495324.00	80.24	2796259.20	64.19	16.05

15:54	57240.00	60.7	48.56	3498975.00	80.33	2799180.00	64.26	16.07
15:55	57300.00	60.3	48.24	3502605.00	80.41	2802084.00	64.33	16.08
15:56	57360.00	60	48	3506214.00	80.49	2804971.20	64.39	16.10
15:57	57420.00	59.7	47.76	3509805.00	80.57	2807844.00	64.46	16.11
15:58	57480.00	59.4	47.52	3513378.00	80.66	2810702.40	64.52	16.13
15:59	57540.00	59	47.2	3516930.00	80.74	2813544.00	64.59	16.15
16:00	57600.00	58.7	46.96	3520461.00	80.82	2816368.00	64.65	16.16
16:01	57660.00	58.4	46.72	3523974.00	80.90	2819179.20	64.72	16.18
16:02	57720.00	58.1	46.48	3527469.00	80.98	2821975.20	64.78	16.20
16:03	57780.00	57.8	46.24	3530946.00	81.06	2824756.80	64.85	16.21
16:04	57840.00	57.4	45.92	3534402.00	81.14	2827521.60	64.91	16.23
16:05	57900.00	57.1	45.68	3537837.00	81.22	2830269.60	64.97	16.24
16:06	57960.00	56.8	45.44	3541254.00	81.30	2833003.20	65.04	16.26
16:07	58020.00	56.5	45.2	3544653.00	81.37	2835722.40	65.10	16.27
16:08	58080.00	56.2	44.96	3548034.00	81.45	2838427.20	65.16	16.29
16:09	58140.00	55.9	44.72	3551397.00	81.53	2841117.60	65.22	16.31
16:10	58200.00	55.7	44.56	3554745.00	81.61	2843796.00	65.28	16.32
16:11	58260.00	55.4	44.32	3558078.00	81.68	2846462.40	65.35	16.34
16:12	58320.00	55.1	44.08	3561393.00	81.76	2849114.40	65.41	16.35
16:13	58380.00	54.9	43.92	3564693.00	81.83	2851754.40	65.47	16.37
16:14	58440.00	54.6	43.68	3567978.00	81.91	2854382.40	65.53	16.38
16:15	58500.00	54.4	43.52	3571248.00	81.98	2856998.40	65.59	16.40
16:16	58560.00	54.1	43.28	3574503.00	82.06	2859602.40	65.65	16.41
16:17	58620.00	53.9	43.12	3577743.00	82.13	2862194.40	65.71	16.43
16:18	58680.00	53.7	42.96	3580971.00	82.21	2864776.80	65.77	16.44
16:19	58740.00	53.5	42.8	3584187.00	82.28	2867349.60	65.83	16.46
16:20	58800.00	53.3	42.64	3587391.00	82.36	2869912.80	65.88	16.47
16:21	58860.00	53.2	42.56	3590586.00	82.43	2872468.80	65.94	16.49
16:22	58920.00	53	42.4	3593772.00	82.50	2875017.60	66.00	16.50
16:23	58980.00	52.8	42.24	3596946.00	82.57	2877556.80	66.06	16.51
16:24	59040.00	52.7	42.16	3600111.00	82.65	2880088.80	66.12	16.53
16:25	59100.00	52.6	42.08	3603270.00	82.72	2882616.00	66.18	16.54
16:26	59160.00	52.4	41.92	3606420.00	82.79	2885136.00	66.23	16.56
16:27	59220.00	52.3	41.84	3609561.00	82.86	2887648.80	66.29	16.57
16:28	59280.00	52.2	41.76	3612696.00	82.94	2890156.80	66.35	16.59
16:29	59340.00	52.1	41.68	3615825.00	83.01	2892660.00	66.41	16.60
16:30	59400.00	52	41.6	3618948.00	83.08	2895158.40	66.46	16.62
16:31	59460.00	52	41.6	3622068.00	83.15	2897654.40	66.52	16.63
16:32	59520.00	51.9	41.52	3625185.00	83.22	2900148.00	66.58	16.64
16:33	59580.00	51.8	41.44	3628296.00	83.29	2902636.80	66.64	16.66
16:34	59640.00	51.7	41.36	3631401.00	83.37	2905120.80	66.69	16.67
16:35	59700.00	51.6	41.28	3634500.00	83.44	2907600.00	66.75	16.69
16:36	59760.00	51.5	41.2	3637593.00	83.51	2910074.40	66.81	16.70
16:37	59820.00	51.5	41.2	3640683.00	83.58	2912546.40	66.86	16.72
16:38	59880.00	51.4	41.12	3643770.00	83.65	2915016.00	66.92	16.73
16:39	59940.00	51.3	41.04	3646851.00	83.72	2917480.80	66.98	16.74
16:40	60000.00	51.2	40.96	3649926.00	83.79	2919940.80	67.03	16.76
16:41	60060.00	51.2	40.96	3652998.00	83.86	2922398.40	67.09	16.77
16:42	60120.00	51.1	40.88	3656067.00	83.93	2924853.60	67.15	16.79
16:43	60180.00	51	40.8	3659130.00	84.00	2927304.00	67.20	16.80
16:44	60240.00	51	40.8	3662190.00	84.07	2929752.00	67.26	16.81
16:45	60300.00	50.9	40.72	3665247.00	84.14	2932197.60	67.31	16.83
16:46	60360.00	50.8	40.64	3668298.00	84.21	2934638.40	67.37	16.84
16:47	60420.00	50.8	40.64	3671346.00	84.28	2937076.80	67.43	16.86
16:48	60480.00	50.7	40.56	3674391.00	84.35	2939512.80	67.48	16.87
16:49	60540.00	50.6	40.48	3677430.00	84.42	2941944.00	67.54	16.88
16:50	60600.00	50.5	40.4	3680463.00	84.49	2944370.40	67.59	16.90
16:51	60660.00	50.5	40.4	3683493.00	84.56	2946794.40	67.65	16.91
16:52	60720.00	50.4	40.32	3686520.00	84.63	2949216.00	67.70	16.93
16:53	60780.00	50.3	40.24	3689541.00	84.70	2951632.80	67.76	16.94
16:54	60840.00	50.2	40.16	3692556.00	84.77	2954044.80	67.82	16.95
16:55	60900.00	50.1	40.08	3695565.00	84.84	2956452.00	67.87	16.97
16:56	60960.00	50	40	3698568.00	84.91	2958854.40	67.93	16.98
16:57	61020.00	49.9	39.92	3701565.00	84.98	2961252.00	67.98	17.00
16:58	61080.00	49.8	39.84	3704556.00	85.04	2963644.80	68.04	17.01
16:59	61140.00	49.7	39.76	3707541.00	85.11	2966032.80	68.09	17.02
17:00	61200.00	49.5	39.6	3710517.00	85.18	2968413.60	68.15	17.04
17:01	61260.00	49.4	39.52	3713484.00	85.25	2970787.20	68.20	17.05
17:02	61320.00	49.3	39.44	3716445.00	85.32	2973156.00	68.25	17.06
17:03	61380.00	49.1	39.28	3719397.00	85.39	2975517.60	68.31	17.08
17:04	61440.00	49	39.2	3722340.00	85.45	2977872.00	68.36	17.09
17:05	61500.00	48.9	39.12	3725277.00	85.52	2980221.60	68.42	17.10
17:06	61560.00	48.8	39.04	3728208.00	85.59	2982566.40	68.47	17.12
17:07	61620.00	48.7	38.96	3731133.00	85.66	2984906.40	68.52	17.13
17:08	61680.00	48.6	38.88	3734052.00	85.72	2987241.60	68.58	17.14
17:09	61740.00	48.4	38.72	3736962.00	85.79	2989569.60	68.63	17.16
17:10	61800.00	48.3	38.64	3739863.00	85.86	2991890.40	68.68	17.17
17:11	61860.00	48.2	38.56	3742758.00	85.92	2994206.40	68.74	17.18
17:12	61920.00	48.1	38.48	3745647.00	85.99	2996517.60	68.79	17.20
17:13	61980.00	47.9	38.32	3748527.00	86.05	2998821.60	68.84	17.21
17:14	62040.00	47.8	38.24	3751398.00	86.12	3001118.40	68.90	17.22
17:15	62100.00	47.7	38.16	3754263.00	86.19	3003410.40	68.95	17.24
17:16	62160.00	47.5	38	3757119.00	86.25	3005695.20	69.00	17.25
17:17	62220.00	47.4	37.92	3759966.00	86.32	3007972.80	69.05	17.26
17:18	62280.00	47.3	37.84	3762807.00	86.38	3010245.60	69.11	17.28
17:19	62340.00	47.1	37.68	3765639.00	86.45	3012511.20	69.16	17.29
17:20	62400.00	47	37.6	3768462.00	86.51	3014769.60	69.21	17.30
17:21	62460.00	46.8	37.44	3771276.00	86.58	3017020.80	69.26	17.32
17:22	62520.00	46.6	37.28	3774078.00	86.64	3019262.40	69.31	17.33
17:23	62580.00	46.5	37.2	3776871.00	86.71	3021496.80	69.36	17.34
17:24	62640.00	46.3	37.04	3779655.00	86.77	3023724.00	69.42	17.35
17:25	62700.00	46.2	36.96	3782430.00	86.83	3025944.00	69.47	17.37
17:26	62760.00	46	36.8	3785196.00	86.90	3028156.80	69.52	17.38
17:27	62820.00	45.9	36.72	3787953.00	86.96	3030362.40	69.57	17.39
17:28	62880.00	45.8	36.64	3790704.00	87.02	3032563.20	69.62	17.40
17:29	62940.00	45.7	36.56	3793449.00	87.09	3034759.20	69.67	17.42

17:30	63000.00	45.5	36.4	3796185.00	87.15	3036948.00	69.72	17.43
17:31	63060.00	45.4	36.32	3798912.00	87.21	3039129.60	69.77	17.44
17:32	63120.00	45.3	36.24	3801633.00	87.27	3041306.40	69.82	17.45
17:33	63180.00	45.2	36.16	3804348.00	87.34	3043478.40	69.87	17.47
17:34	63240.00	45.1	36.08	3807057.00	87.40	3045645.60	69.92	17.48
17:35	63300.00	45	36	3809760.00	87.46	3047808.00	69.97	17.49
17:36	63360.00	44.9	35.92	3812457.00	87.52	3049965.60	70.02	17.50
17:37	63420.00	44.9	35.92	3815151.00	87.58	3052120.80	70.07	17.52
17:38	63480.00	44.8	35.84	3817842.00	87.65	3054273.60	70.12	17.53
17:39	63540.00	44.7	35.76	3820527.00	87.71	3056421.60	70.17	17.54
17:40	63600.00	44.6	35.68	3823206.00	87.77	3058564.80	70.21	17.55
17:41	63660.00	44.5	35.6	3825879.00	87.83	3060703.20	70.26	17.57
17:42	63720.00	44.5	35.6	3828549.00	87.89	3062839.20	70.31	17.58
17:43	63780.00	44.4	35.52	3831216.00	87.95	3064972.80	70.36	17.59
17:44	63840.00	44.3	35.44	3833877.00	88.01	3067101.60	70.41	17.60
17:45	63900.00	44.2	35.36	3836532.00	88.07	3069225.60	70.46	17.61
17:46	63960.00	44.2	35.36	3839184.00	88.14	3071347.20	70.51	17.63
17:47	64020.00	44.1	35.28	3841833.00	88.20	3073466.40	70.56	17.64
17:48	64080.00	44	35.2	3844476.00	88.26	3075580.80	70.61	17.65
17:49	64140.00	43.9	35.12	3847113.00	88.32	3077690.40	70.65	17.66
17:50	64200.00	43.8	35.04	3849744.00	88.38	3079795.20	70.70	17.68
17:51	64260.00	43.7	34.96	3852369.00	88.44	3081895.20	70.75	17.69
17:52	64320.00	43.6	34.88	3854988.00	88.50	3083990.40	70.80	17.70
17:53	64380.00	43.5	34.8	3857601.00	88.56	3086080.80	70.85	17.71
17:54	64440.00	43.4	34.72	3860208.00	88.62	3088166.40	70.89	17.72
17:55	64500.00	43.3	34.64	3862809.00	88.68	3090247.20	70.94	17.74
17:56	64560.00	43.2	34.56	3865404.00	88.74	3092323.20	70.99	17.75
17:57	64620.00	43.1	34.48	3867993.00	88.80	3094394.40	71.04	17.76
17:58	64680.00	43	34.4	3870576.00	88.86	3096460.80	71.08	17.77
17:59	64740.00	42.9	34.32	3873153.00	88.92	3098522.40	71.13	17.78
18:00	64800.00	42.8	34.24	3875724.00	88.97	3100579.20	71.18	17.79
18:01	64860.00	42.7	34.16	3878289.00	89.03	3102631.20	71.23	17.81
18:02	64920.00	42.5	34	3880845.00	89.09	3104676.00	71.27	17.82
18:03	64980.00	42.4	33.92	3883392.00	89.15	3106713.60	71.32	17.83
18:04	65040.00	42.3	33.84	3885933.00	89.21	3108746.40	71.37	17.84
18:05	65100.00	42.2	33.76	3888468.00	89.27	3110774.40	71.41	17.85
18:06	65160.00	42.1	33.68	3890997.00	89.33	3112797.60	71.46	17.87
18:07	65220.00	42	33.6	3893520.00	89.38	3114816.00	71.51	17.88
18:08	65280.00	41.8	33.44	3896034.00	89.44	3116827.20	71.55	17.89
18:09	65340.00	41.7	33.36	3898539.00	89.50	3118831.20	71.60	17.90
18:10	65400.00	41.6	33.28	3901038.00	89.56	3120830.40	71.64	17.91
18:11	65460.00	41.5	33.2	3903531.00	89.61	3122824.80	71.69	17.92
18:12	65520.00	41.4	33.12	3906018.00	89.67	3124814.40	71.74	17.93
18:13	65580.00	41.3	33.04	3908499.00	89.73	3126799.20	71.78	17.95
18:14	65640.00	41.2	32.96	3910974.00	89.78	3128779.20	71.83	17.96
18:15	65700.00	41	32.8	3913440.00	89.84	3130752.00	71.87	17.97
18:16	65760.00	40.9	32.72	3915897.00	89.90	3132717.60	71.92	17.98
18:17	65820.00	40.8	32.64	3918348.00	89.95	3134678.40	71.96	17.99
18:18	65880.00	40.7	32.56	3920793.00	90.01	3136634.40	72.01	18.00
18:19	65940.00	40.6	32.48	3923232.00	90.07	3138585.60	72.05	18.01
18:20	66000.00	40.5	32.4	3925665.00	90.12	3140532.00	72.10	18.02
18:21	66060.00	40.4	32.32	3928092.00	90.18	3142473.60	72.14	18.04
18:22	66120.00	40.3	32.24	3930513.00	90.23	3144410.40	72.19	18.05
18:23	66180.00	40.2	32.16	3932928.00	90.29	3146342.40	72.23	18.06
18:24	66240.00	40.1	32.08	3935337.00	90.34	3148269.60	72.27	18.07
18:25	66300.00	40	32	3937740.00	90.40	3150192.00	72.32	18.08
18:26	66360.00	39.9	31.92	3940137.00	90.45	3152109.60	72.36	18.09
18:27	66420.00	39.8	31.84	3942528.00	90.51	3154022.40	72.41	18.10
18:28	66480.00	39.7	31.76	3944913.00	90.56	3155930.40	72.45	18.11
18:29	66540.00	39.6	31.68	3947292.00	90.62	3157833.60	72.49	18.12
18:30	66600.00	39.5	31.6	3949665.00	90.67	3159732.00	72.54	18.13
18:31	66660.00	39.4	31.52	3952032.00	90.73	3161625.60	72.58	18.15
18:32	66720.00	39.3	31.44	3954393.00	90.78	3163514.40	72.62	18.16
18:33	66780.00	39.2	31.36	3956748.00	90.83	3165398.40	72.67	18.17
18:34	66840.00	39.1	31.28	3959097.00	90.89	3167277.60	72.71	18.18
18:35	66900.00	39.1	31.28	3961443.00	90.94	3169154.40	72.75	18.19
18:36	66960.00	39	31.2	3963786.00	91.00	3171028.80	72.80	18.20
18:37	67020.00	38.9	31.12	3966123.00	91.05	3172898.40	72.84	18.21
18:38	67080.00	38.8	31.04	3968454.00	91.10	3174763.20	72.88	18.22
18:39	67140.00	38.7	30.96	3970779.00	91.16	3176623.20	72.93	18.23
18:40	67200.00	38.7	30.96	3973101.00	91.21	3178480.80	72.97	18.24
18:41	67260.00	38.6	30.88	3975420.00	91.26	3180336.00	73.01	18.25
18:42	67320.00	38.5	30.8	3977733.00	91.32	3182186.40	73.05	18.26
18:43	67380.00	38.4	30.72	3980040.00	91.37	3184032.00	73.10	18.27
18:44	67440.00	38.4	30.72	3982344.00	91.42	3185875.20	73.14	18.28
18:45	67500.00	38.3	30.64	3984645.00	91.47	3187716.00	73.18	18.29
18:46	67560.00	38.2	30.56	3986940.00	91.53	3189552.00	73.22	18.31
18:47	67620.00	38.2	30.56	3989232.00	91.58	3191385.60	73.26	18.32
18:48	67680.00	38.1	30.48	3991521.00	91.63	3193216.80	73.31	18.33
18:49	67740.00	38	30.4	3993804.00	91.69	3195043.20	73.35	18.34
18:50	67800.00	37.9	30.32	3996081.00	91.74	3196864.80	73.39	18.35
18:51	67860.00	37.8	30.24	3998352.00	91.79	3198681.60	73.43	18.36
18:52	67920.00	37.7	30.16	4000617.00	91.84	3200493.60	73.47	18.37
18:53	67980.00	37.6	30.08	4002876.00	91.89	3202300.80	73.51	18.38
18:54	68040.00	37.5	30	4005129.00	91.95	3204103.20	73.56	18.39
18:55	68100.00	37.4	29.92	4007376.00	92.00	3205900.80	73.60	18.40
18:56	68160.00	37.3	29.84	4009617.00	92.05	3207693.60	73.64	18.41
18:57	68220.00	37.2	29.76	4011852.00	92.10	3209481.60	73.68	18.42
18:58	68280.00	37.1	29.68	4014081.00	92.15	3211264.80	73.72	18.43
18:59	68340.00	37	29.6	4016304.00	92.20	3213043.20	73.76	18.44
19:00	68400.00	36.8	29.44	4018518.00	92.25	3214814.40	73.80	18.45
19:01	68460.00	36.7	29.36	4020723.00	92.30	3216578.40	73.84	18.46
19:02	68520.00	36.6	29.28	4022922.00	92.35	3218337.60	73.88	18.47
19:03	68580.00	36.5	29.2	4025115.00	92.40	3220092.00	73.92	18.48
19:04	68640.00	36.4	29.12	4027302.00	92.45	3221841.60	73.96	18.49
19:05	68700.00	36.3	29.04	4029483.00	92.50	3223586.40	74.00	18.50

19:06	68760.00	36.2	28.96	4031658.00	92.55	3225326.40	74.04	18.51
19:07	68820.00	36.2	28.96	4033830.00	92.60	3227064.00	74.08	18.52
19:08	68890.00	36.1	28.88	4035999.00	92.65	3228799.20	74.12	18.53
19:09	68940.00	36	28.8	4038162.00	92.70	3230529.60	74.16	18.54
19:10	69000.00	35.9	28.72	4040319.00	92.75	3232255.20	74.20	18.55
19:11	69060.00	35.8	28.64	4042470.00	92.80	3233976.00	74.24	18.56
19:12	69120.00	35.7	28.56	4044615.00	92.85	3235692.00	74.28	18.57
19:13	69180.00	35.6	28.48	4046754.00	92.90	3237403.20	74.32	18.58
19:14	69240.00	35.5	28.4	4048887.00	92.95	3239109.60	74.36	18.59
19:15	69300.00	35.4	28.32	4051014.00	93.00	3240811.20	74.40	18.60
19:16	69360.00	35.3	28.24	4053135.00	93.05	3242508.00	74.44	18.61
19:17	69420.00	35.2	28.16	4055250.00	93.10	3244200.00	74.48	18.62
19:18	69480.00	35	28	4057356.00	93.14	3245884.80	74.52	18.63
19:19	69540.00	34.9	27.92	4059453.00	93.19	3247562.40	74.55	18.64
19:20	69600.00	34.8	27.84	4061544.00	93.24	3249235.20	74.59	18.65
19:21	69660.00	34.7	27.76	4063629.00	93.29	3250903.20	74.63	18.66
19:22	69720.00	34.6	27.68	4065708.00	93.34	3252566.40	74.67	18.67
19:23	69780.00	34.5	27.6	4067781.00	93.38	3254224.80	74.71	18.68
19:24	69840.00	34.3	27.44	4069845.00	93.43	3255876.00	74.74	18.69
19:25	69900.00	34.2	27.36	4071900.00	93.48	3257520.00	74.78	18.70
19:26	69960.00	34.1	27.28	4073949.00	93.53	3259159.20	74.82	18.71
19:27	70020.00	34	27.2	4075992.00	93.57	3260793.60	74.86	18.71
19:28	70080.00	33.9	27.12	4078029.00	93.62	3262423.20	74.89	18.72
19:29	70140.00	33.8	27.04	4080060.00	93.67	3264048.00	74.93	18.73
19:30	70200.00	33.7	26.96	4082085.00	93.71	3265668.00	74.97	18.74
19:31	70260.00	33.6	26.88	4084104.00	93.76	3267283.20	75.01	18.75
19:32	70320.00	33.6	26.88	4086120.00	93.80	3268896.00	75.04	18.76
19:33	70380.00	33.5	26.8	4088133.00	93.85	3270506.40	75.08	18.77
19:34	70440.00	33.4	26.72	4090140.00	93.90	3272112.00	75.12	18.78
19:35	70500.00	33.4	26.72	4092144.00	93.94	3273715.20	75.15	18.79
19:36	70560.00	33.3	26.64	4094145.00	93.99	3275316.00	75.19	18.80
19:37	70620.00	33.3	26.64	4096143.00	94.03	3276914.40	75.23	18.81
19:38	70680.00	33.2	26.56	4098138.00	94.08	3278510.40	75.26	18.82
19:39	70740.00	33.2	26.56	4100130.00	94.13	3280104.00	75.30	18.83
19:40	70800.00	33.2	26.56	4102122.00	94.17	3281697.60	75.34	18.83
19:41	70860.00	33.2	26.56	4104114.00	94.22	3283291.20	75.37	18.84
19:42	70920.00	33.2	26.56	4106106.00	94.26	3284884.80	75.41	18.85
19:43	70980.00	33.2	26.56	4108098.00	94.31	3286478.40	75.45	18.86
19:44	71040.00	33.2	26.56	4110090.00	94.35	3288072.00	75.48	18.87
19:45	71100.00	33.2	26.56	4112082.00	94.40	3289665.60	75.52	18.88
19:46	71160.00	33.2	26.56	4114074.00	94.45	3291259.20	75.55	18.89
19:47	71220.00	33.2	26.56	4116066.00	94.49	3292852.80	75.59	18.90
19:48	71280.00	33.2	26.56	4118058.00	94.54	3294446.40	75.63	18.91
19:49	71340.00	33.2	26.56	4120050.00	94.58	3296040.00	75.67	18.92
19:50	71400.00	33.2	26.56	4122042.00	94.63	3297633.60	75.70	18.93
19:51	71460.00	33.2	26.56	4124034.00	94.67	3299227.20	75.74	18.93
19:52	71520.00	33.1	26.48	4126023.00	94.72	3300818.40	75.78	18.94
19:53	71580.00	33.1	26.48	4128009.00	94.77	3302407.20	75.81	18.95
19:54	71640.00	33.1	26.48	4129995.00	94.81	3303996.00	75.85	18.96
19:55	71700.00	33.1	26.48	4131981.00	94.86	3305584.80	75.89	18.97
19:56	71760.00	33.1	26.48	4133967.00	94.90	3307173.60	75.92	18.98
19:57	71820.00	33.1	26.48	4135953.00	94.95	3308762.40	75.96	18.99
19:58	71880.00	33	26.4	4137936.00	94.99	3310348.80	76.00	19.00
19:59	71940.00	33	26.4	4139916.00	95.04	3311932.80	76.03	19.01
20:00	72000.00	33	26.4	4141896.00	95.08	3313516.80	76.07	19.02
20:01	72060.00	33	26.4	4143876.00	95.13	3315100.80	76.10	19.03
20:02	72120.00	32.9	26.32	4145853.00	95.18	3316682.40	76.14	19.04
20:03	72180.00	32.9	26.32	4147827.00	95.22	3318261.60	76.18	19.04
20:04	72240.00	32.9	26.32	4149801.00	95.27	3319840.80	76.21	19.05
20:05	72300.00	32.9	26.32	4151775.00	95.31	3321420.00	76.25	19.06
20:06	72360.00	32.9	26.32	4153749.00	95.36	3322999.20	76.29	19.07
20:07	72420.00	32.9	26.32	4155723.00	95.40	3324578.40	76.32	19.08
20:08	72480.00	32.9	26.32	4157697.00	95.45	3326157.60	76.36	19.09
20:09	72540.00	32.9	26.32	4159671.00	95.49	3327736.80	76.39	19.10
20:10	72600.00	32.9	26.32	4161645.00	95.54	3329316.00	76.43	19.11
20:11	72660.00	32.9	26.32	4163619.00	95.58	3330895.20	76.47	19.12
20:12	72720.00	32.9	26.32	4165593.00	95.63	3332474.40	76.50	19.13
20:13	72780.00	32.9	26.32	4167567.00	95.67	3334053.60	76.54	19.13
20:14	72840.00	32.8	26.24	4169538.00	95.72	3335630.40	76.58	19.14
20:15	72900.00	32.8	26.24	4171506.00	95.76	3337204.80	76.61	19.15
20:16	72960.00	32.8	26.24	4173474.00	95.81	3338779.20	76.65	19.16
20:17	73020.00	32.7	26.16	4175439.00	95.85	3340351.20	76.68	19.17
20:18	73080.00	32.7	26.16	4177401.00	95.90	3341920.80	76.72	19.18
20:19	73140.00	32.6	26.08	4179360.00	95.94	3343488.00	76.76	19.19
20:20	73200.00	32.5	26	4181313.00	95.99	3345050.40	76.79	19.20
20:21	73260.00	32.4	25.92	4183260.00	96.03	3346608.00	76.83	19.21
20:22	73320.00	32.3	25.84	4185201.00	96.08	3348160.80	76.86	19.22
20:23	73380.00	32.2	25.76	4187136.00	96.12	3349708.80	76.90	19.22
20:24	73440.00	32.1	25.68	4189065.00	96.17	3351252.00	76.93	19.23
20:25	73500.00	32	25.6	4190988.00	96.21	3352790.40	76.97	19.24
20:26	73560.00	31.9	25.52	4192905.00	96.26	3354324.00	77.00	19.25
20:27	73620.00	31.8	25.44	4194816.00	96.30	3355852.80	77.04	19.26
20:28	73680.00	31.7	25.36	4196721.00	96.34	3357376.80	77.07	19.27
20:29	73740.00	31.6	25.28	4198620.00	96.39	3358896.00	77.11	19.28
20:30	73800.00	31.5	25.2	4200513.00	96.43	3360410.40	77.14	19.29
20:31	73860.00	31.4	25.12	4202400.00	96.47	3361920.00	77.18	19.29
20:32	73920.00	31.3	25.04	4204281.00	96.52	3363424.80	77.21	19.30
20:33	73980.00	31.2	24.96	4206156.00	96.56	3364924.80	77.25	19.31
20:34	74040.00	31.1	24.88	4208025.00	96.60	3366420.00	77.28	19.32
20:35	74100.00	31	24.8	4209888.00	96.65	3367910.40	77.32	19.33
20:36	74160.00	31	24.8	4211748.00	96.69	3369398.40	77.35	19.34
20:37	74220.00	30.9	24.72	4213605.00	96.73	3370884.00	77.38	19.35
20:38	74280.00	30.9	24.72	4215459.00	96.77	3372367.20	77.42	19.35
20:39	74340.00	30.8	24.64	4217310.00	96.82	3373848.00	77.45	19.36
20:40	74400.00	30.8	24.64	4219158.00	96.86	3375326.40	77.49	19.37
20:41	74460.00	30.7	24.56	4221003.00	96.90	3376802.40	77.52	19.38

20:42	74520.00	30.7	24.56	4222845.00	96.94	3378276.00	77.55	19.39
20:43	74580.00	30.6	24.48	4224684.00	96.99	3379747.20	77.59	19.40
20:44	74640.00	30.6	24.48	4226520.00	97.03	3381216.00	77.62	19.41
20:45	74700.00	30.5	24.4	4228353.00	97.07	3382682.40	77.66	19.41
20:46	74760.00	30.5	24.4	4230183.00	97.11	3384146.40	77.69	19.42
20:47	74820.00	30.4	24.32	4232010.00	97.15	3385608.00	77.72	19.43
20:48	74880.00	30.4	24.32	4233834.00	97.20	3387067.20	77.76	19.44
20:49	74940.00	30.3	24.24	4235655.00	97.24	3388524.00	77.79	19.45
20:50	75000.00	30.2	24.16	4237470.00	97.28	3389976.00	77.82	19.46
20:51	75060.00	30.1	24.08	4239279.00	97.32	3391423.20	77.86	19.46
20:52	75120.00	30	24	4241082.00	97.36	3392865.60	77.89	19.47
20:53	75180.00	29.9	23.92	4242879.00	97.40	3394303.20	77.92	19.48
20:54	75240.00	29.8	23.84	4244670.00	97.44	3395736.00	77.96	19.49
20:55	75300.00	29.7	23.76	4246455.00	97.49	3397164.00	77.99	19.50
20:56	75360.00	29.6	23.68	4248234.00	97.53	3398587.20	78.02	19.51
20:57	75420.00	29.5	23.6	4250007.00	97.57	3400005.60	78.05	19.51
20:58	75480.00	29.4	23.52	4251774.00	97.61	3401419.20	78.09	19.52
20:59	75540.00	29.3	23.52	4253538.00	97.65	3402830.40	78.12	19.53
21:00	75600.00	29.3	23.44	4255299.00	97.69	3404239.20	78.15	19.54
21:01	75660.00	29.2	23.36	4257054.00	97.73	3405643.20	78.18	19.55
21:02	75720.00	29.1	23.28	4258803.00	97.77	3407042.40	78.21	19.55
21:03	75780.00	29	23.2	4260546.00	97.81	3408436.80	78.25	19.56
21:04	75840.00	29	23.2	4262286.00	97.85	3409828.80	78.28	19.57
21:05	75900.00	28.9	23.12	4264023.00	97.89	3411218.40	78.31	19.58
21:06	75960.00	28.8	23.04	4265754.00	97.93	3412603.20	78.34	19.59
21:07	76020.00	28.7	22.96	4267479.00	97.97	3413983.20	78.37	19.59
21:08	76080.00	28.7	22.96	4269201.00	98.01	3415360.80	78.41	19.60
21:09	76140.00	28.6	22.88	4270920.00	98.05	3416736.00	78.44	19.61
21:10	76200.00	28.5	22.8	4272633.00	98.09	3418106.40	78.47	19.62
21:11	76260.00	28.5	22.8	4274343.00	98.13	3419474.40	78.50	19.63
21:12	76320.00	28.4	22.72	4276050.00	98.16	3420840.00	78.53	19.63
21:13	76380.00	28.3	22.64	4277751.00	98.20	3422200.80	78.56	19.64
21:14	76440.00	28.2	22.56	4279446.00	98.24	3423556.80	78.59	19.65
21:15	76500.00	28.2	22.56	4281138.00	98.28	3424910.40	78.63	19.66
21:16	76560.00	28.1	22.48	4282827.00	98.32	3426261.60	78.66	19.66
21:17	76620.00	28	22.4	4284510.00	98.36	3427608.00	78.69	19.67
21:18	76680.00	27.9	22.32	4286187.00	98.40	3428949.60	78.72	19.68
21:19	76740.00	27.8	22.24	4287858.00	98.44	3430286.40	78.75	19.69
21:20	76800.00	27.8	22.24	4289526.00	98.47	3431620.80	78.78	19.69
21:21	76860.00	27.7	22.16	4291191.00	98.51	3432952.80	78.81	19.70
21:22	76920.00	27.7	22.16	4292853.00	98.55	3434282.40	78.84	19.71
21:23	76980.00	27.6	22.08	4294512.00	98.59	3435609.60	78.87	19.72
21:24	77040.00	27.6	22.08	4296168.00	98.63	3436934.40	78.90	19.73
21:25	77100.00	27.5	22	4297821.00	98.66	3438256.80	78.93	19.73
21:26	77160.00	27.5	22	4299471.00	98.70	3439576.80	78.96	19.74
21:27	77220.00	27.4	21.92	4301118.00	98.74	3440894.40	78.99	19.75
21:28	77280.00	27.4	21.92	4302762.00	98.78	3442209.60	79.02	19.76
21:29	77340.00	27.3	21.84	4304403.00	98.82	3443522.40	79.05	19.76
21:30	77400.00	27.2	21.76	4306038.00	98.85	3444830.40	79.08	19.77
21:31	77460.00	27.2	21.76	4307670.00	98.89	3446136.00	79.11	19.78
21:32	77520.00	27.1	21.68	4309299.00	98.93	3447439.20	79.14	19.79
21:33	77580.00	27.1	21.68	4310925.00	98.97	3448740.00	79.17	19.79
21:34	77640.00	27	21.6	4312548.00	99.00	3450038.40	79.20	19.80
21:35	77700.00	26.9	21.52	4314165.00	99.04	3451332.00	79.23	19.81
21:36	77760.00	26.8	21.44	4315776.00	99.08	3452620.80	79.26	19.82
21:37	77820.00	26.7	21.36	4317381.00	99.11	3453904.80	79.29	19.82
21:38	77880.00	26.6	21.28	4318980.00	99.15	3455184.00	79.32	19.83
21:39	77940.00	26.5	21.2	4320573.00	99.19	3456458.40	79.35	19.84
21:40	78000.00	26.4	21.12	4322160.00	99.22	3457728.00	79.38	19.84
21:41	78060.00	26.4	21.12	4323744.00	99.26	3458995.20	79.41	19.85
21:42	78120.00	26.3	21.04	4325325.00	99.30	3460260.00	79.44	19.86
21:43	78180.00	26.2	20.96	4326900.00	99.33	3461520.00	79.47	19.87
21:44	78240.00	26.2	20.96	4328472.00	99.37	3462777.60	79.49	19.87
21:45	78300.00	26.1	20.88	4330041.00	99.40	3464032.80	79.52	19.88
21:46	78360.00	26.1	20.88	4331607.00	99.44	3465285.60	79.55	19.89
21:47	78420.00	26	20.8	4333170.00	99.48	3466536.00	79.58	19.90
21:48	78480.00	26	20.8	4334730.00	99.51	3467784.00	79.61	19.90
21:49	78540.00	26	20.8	4336290.00	99.55	3469032.00	79.64	19.91
21:50	78600.00	26	20.8	4337850.00	99.58	3470280.00	79.67	19.92
21:51	78660.00	25.9	20.72	4339407.00	99.62	3471525.60	79.70	19.92
21:52	78720.00	25.9	20.72	4340961.00	99.65	3472768.80	79.72	19.93
21:53	78780.00	25.9	20.72	4342515.00	99.69	3474012.00	79.75	19.94
21:54	78840.00	25.9	20.72	4344069.00	99.73	3475255.20	79.78	19.95
21:55	78900.00	25.8	20.64	4345620.00	99.76	3476496.00	79.81	19.95
21:56	78960.00	25.8	20.64	4347168.00	99.80	3477734.40	79.84	19.96
21:57	79020.00	25.8	20.64	4348716.00	99.83	3478972.80	79.87	19.97
21:58	79080.00	25.8	20.64	4350264.00	99.87	3480211.20	79.89	19.97
21:59	79140.00	25.8	20.64	4351812.00	99.90	3481449.60	79.92	19.98
22:00	79200.00	25.7	20.56	4353357.00	99.94	3482685.60	79.95	19.99
22:01	79260.00	25.7	20.56	4354899.00	99.97	3483919.20	79.98	19.99
22:02	79320.00	25.7	20.56	4356441.00	100.01	3485152.80	80.01	20.00
22:03	79380.00	25.6	20.48	4357980.00	100.05	3486384.00	80.04	20.01
22:04	79440.00	25.6	20.48	4359516.00	100.08	3487612.80	80.06	20.02
22:05	79500.00	25.6	20.48	4361052.00	100.12	3488841.60	80.09	20.02
22:06	79560.00	25.6	20.48	4362588.00	100.15	3490070.40	80.12	20.03
22:07	79620.00	25.6	20.48	4364124.00	100.19	3491299.20	80.15	20.04
22:08	79680.00	25.6	20.48	4365660.00	100.22	3492528.00	80.18	20.04
22:09	79740.00	25.6	20.48	4367196.00	100.26	3493756.80	80.21	20.05
22:10	79800.00	25.6	20.48	4368732.00	100.29	3494985.60	80.23	20.06
22:11	79860.00	25.6	20.48	4370268.00	100.33	3496214.40	80.26	20.07
22:12	79920.00	25.5	20.4	4371801.00	100.36	3497440.80	80.29	20.07
22:13	79980.00	25.5	20.4	4373331.00	100.40	3498664.80	80.32	20.08
22:14	80040.00	25.5	20.4	4374861.00	100.43	3499888.80	80.35	20.09
22:15	80100.00	25.5	20.4	4376391.00	100.47	3501112.80	80.37	20.09
22:16	80160.00	25.5	20.4	4377921.00	100.50	3502336.80	80.40	20.10
22:17	80220.00	25.5	20.4	4379451.00	100.54	3503560.80	80.43	20.11

22:18	80280.00	25.5	20.4	4380981.00	100.57	3504784.80	80.46	20.11
22:19	80340.00	25.4	20.32	4382508.00	100.61	3506006.40	80.49	20.12
22:20	80400.00	25.4	20.32	4384032.00	100.64	3507225.60	80.51	20.13
22:21	80460.00	25.3	20.24	4385553.00	100.68	3508442.40	80.54	20.14
22:22	80520.00	25.3	20.24	4387071.00	100.71	3509656.80	80.57	20.14
22:23	80580.00	25.2	20.16	4388586.00	100.75	3510868.80	80.60	20.15
22:24	80640.00	25.2	20.16	4390098.00	100.78	3512078.40	80.63	20.16
22:25	80700.00	25.2	20.16	4391610.00	100.82	3513288.00	80.65	20.16
22:26	80760.00	25.1	20.08	4393119.00	100.85	3514495.20	80.68	20.17
22:27	80820.00	25.1	20.08	4394625.00	100.89	3515700.00	80.71	20.18
22:28	80880.00	25.1	20.08	4396131.00	100.92	3516904.80	80.74	20.18
22:29	80940.00	25.1	20.08	4397637.00	100.96	3518109.60	80.76	20.19
22:30	81000.00	25.1	20.08	4399143.00	100.99	3519314.40	80.79	20.20
22:31	81060.00	25.1	20.08	4400649.00	101.03	3520519.20	80.82	20.21
22:32	81120.00	25.1	20.08	4402155.00	101.06	3521724.00	80.85	20.21
22:33	81180.00	25.1	20.08	4403661.00	101.09	3522928.80	80.88	20.22
22:34	81240.00	25.1	20.08	4405167.00	101.13	3524133.60	80.90	20.23
22:35	81300.00	25.2	20.16	4406676.00	101.16	3525340.80	80.93	20.23
22:36	81360.00	25.2	20.16	4408188.00	101.20	3526550.40	80.96	20.24
22:37	81420.00	25.3	20.24	4409703.00	101.23	3527762.40	80.99	20.25
22:38	81480.00	25.4	20.32	4411224.00	101.27	3528979.20	81.01	20.25
22:39	81540.00	25.5	20.4	4412751.00	101.30	3530200.00	81.04	20.26
22:40	81600.00	25.5	20.4	4414281.00	101.34	3531424.80	81.07	20.27
22:41	81660.00	25.6	20.48	4415814.00	101.37	3532651.20	81.10	20.27
22:42	81720.00	25.7	20.56	4417353.00	101.41	3533882.40	81.13	20.28
22:43	81780.00	25.7	20.56	4418895.00	101.44	3535116.00	81.16	20.29
22:44	81840.00	25.8	20.64	4420440.00	101.48	3536352.00	81.18	20.30
22:45	81900.00	25.9	20.72	4421991.00	101.51	3537592.80	81.21	20.30
22:46	81960.00	26	20.8	4423548.00	101.55	3538838.40	81.24	20.31
22:47	82020.00	26	20.8	4425108.00	101.59	3540086.40	81.27	20.32
22:48	82080.00	26.1	20.88	4426671.00	101.62	3541336.80	81.30	20.32
22:49	82140.00	26.1	20.88	4428237.00	101.66	3542589.60	81.33	20.33
22:50	82200.00	26.1	20.88	4429803.00	101.69	3543842.40	81.36	20.34
22:51	82260.00	26.1	20.88	4431369.00	101.73	3545095.20	81.38	20.35
22:52	82320.00	26.2	20.96	4432938.00	101.77	3546350.40	81.41	20.35
22:53	82380.00	26.2	20.96	4434510.00	101.80	3547608.00	81.44	20.36
22:54	82440.00	26.2	20.96	4436082.00	101.84	3548865.60	81.47	20.37
22:55	82500.00	26.2	20.96	4437654.00	101.87	3550123.20	81.50	20.37
22:56	82560.00	26.2	20.96	4439226.00	101.91	3551380.80	81.53	20.38
22:57	82620.00	26.2	20.96	4440798.00	101.95	3552638.40	81.56	20.39
22:58	82680.00	26.2	20.96	4442370.00	101.98	3553896.00	81.59	20.40
22:59	82740.00	26.2	20.96	4443942.00	102.02	3555153.60	81.62	20.40
23:00	82800.00	26.2	20.96	4445514.00	102.05	3556411.20	81.64	20.41
23:01	82860.00	26.3	21.04	4447089.00	102.09	3557671.20	81.67	20.42
23:02	82920.00	26.3	21.04	4448667.00	102.13	3558933.60	81.70	20.43
23:03	82980.00	26.3	21.04	4450245.00	102.16	3560196.00	81.73	20.43
23:04	83040.00	26.3	21.04	4451823.00	102.20	3561458.40	81.76	20.44
23:05	83100.00	26.3	21.04	4453401.00	102.24	3562720.80	81.79	20.45
23:06	83160.00	26.3	21.04	4454979.00	102.27	3563983.20	81.82	20.45
23:07	83220.00	26.4	21.12	4456560.00	102.31	3565248.00	81.85	20.46
23:08	83280.00	26.4	21.12	4458144.00	102.34	3566515.20	81.88	20.47
23:09	83340.00	26.4	21.12	4459728.00	102.38	3567782.40	81.91	20.48
23:10	83400.00	26.4	21.12	4461312.00	102.42	3569049.60	81.93	20.48
23:11	83460.00	26.4	21.12	4462896.00	102.45	3570316.80	81.96	20.49
23:12	83520.00	26.4	21.12	4464480.00	102.49	3571584.00	81.99	20.50
23:13	83580.00	26.4	21.12	4466064.00	102.53	3572851.20	82.02	20.51
23:14	83640.00	26.4	21.12	4467648.00	102.56	3574118.40	82.05	20.51
23:15	83700.00	26.4	21.12	4469232.00	102.60	3575385.60	82.08	20.52
23:16	83760.00	26.4	21.12	4470816.00	102.64	3576652.80	82.11	20.53
23:17	83820.00	26.4	21.12	4472400.00	102.67	3577920.00	82.14	20.53
23:18	83880.00	26.3	21.04	4473981.00	102.71	3579184.80	82.17	20.54
23:19	83940.00	26.3	21.04	4475559.00	102.74	3580447.20	82.20	20.55
23:20	84000.00	26.3	21.04	4477137.00	102.78	3581709.60	82.22	20.56
23:21	84060.00	26.3	21.04	4478715.00	102.82	3582972.00	82.25	20.56
23:22	84120.00	26.4	21.12	4480296.00	102.85	3584236.80	82.28	20.57
23:23	84180.00	26.4	21.12	4481880.00	102.89	3585504.00	82.31	20.58
23:24	84240.00	26.4	21.12	4483464.00	102.93	3586771.20	82.34	20.59
23:25	84300.00	26.4	21.12	4485048.00	102.96	3588038.40	82.37	20.59
23:26	84360.00	26.3	21.04	4486629.00	103.00	3589303.20	82.40	20.60
23:27	84420.00	26.3	21.04	4488207.00	103.04	3590565.60	82.43	20.61
23:28	84480.00	26.3	21.04	4489785.00	103.07	3591828.00	82.46	20.61
23:29	84540.00	26.3	21.04	4491363.00	103.11	3593090.40	82.49	20.62
23:30	84600.00	26.3	21.04	4492941.00	103.14	3594352.80	82.51	20.63
23:31	84660.00	26.3	21.04	4494519.00	103.18	3595615.20	82.54	20.64
23:32	84720.00	26.2	20.96	4496094.00	103.22	3596875.20	82.57	20.64
23:33	84780.00	26.2	20.96	4497666.00	103.25	3598132.80	82.60	20.65
23:34	84840.00	26.2	20.96	4499238.00	103.29	3599390.40	82.63	20.66
23:35	84900.00	26.1	20.88	4500807.00	103.32	3600645.60	82.66	20.66
23:36	84960.00	26	20.8	4502370.00	103.36	3601896.00	82.69	20.67
23:37	85020.00	26	20.8	4503930.00	103.40	3603144.00	82.72	20.68
23:38	85080.00	25.9	20.72	4505487.00	103.43	3604389.60	82.75	20.69
23:39	85140.00	25.9	20.72	4507041.00	103.47	3605632.80	82.77	20.69
23:40	85200.00	25.8	20.64	4508592.00	103.50	3606873.60	82.80	20.70
23:41	85260.00	25.8	20.64	4510140.00	103.54	3608112.00	82.83	20.71
23:42	85320.00	25.7	20.56	4511685.00	103.57	3609348.00	82.86	20.71
23:43	85380.00	25.7	20.56	4513227.00	103.61	3610581.60	82.89	20.72
23:44	85440.00	25.6	20.48	4514766.00	103.64	3611812.80	82.92	20.73
23:45	85500.00	25.6	20.48	4516302.00	103.68	3613041.60	82.94	20.74
23:46	85560.00	25.6	20.48	4517838.00	103.72	3614270.40	82.97	20.74
23:47	85620.00	25.6	20.48	4519374.00	103.75	3615499.20	83.00	20.75
23:48	85680.00	25.6	20.48	4520910.00	103.79	3616728.00	83.03	20.76
23:49	85740.00	25.6	20.48	4522446.00	103.82	3617956.80	83.06	20.76
23:50	85800.00	25.6	20.48	4523982.00	103.86	3619185.60	83.09	20.77
23:51	85860.00	25.6	20.48	4525518.00	103.89	3620414.40	83.11	20.78
23:52	85920.00	25.6	20.48	4527054.00	103.93	3621643.20	83.14	20.79
23:53	85980.00	25.5	20.4	4528587.00	103.96	3622869.60	83.17	20.79

23:54	86040.00	25.5	20.4	4530117.00	104.00	3624093.60	83.20	20.80
23:55	86100.00	25.5	20.4	4531647.00	104.03	3625317.60	83.23	20.81
23:56	86160.00	25.5	20.4	4533177.00	104.07	3626541.60	83.25	20.81
23:57	86220.00	25.5	20.4	4534707.00	104.10	3627765.60	83.28	20.82
23:58	86280.00	25.5	20.4	4536237.00	104.14	3628989.60	83.31	20.83
23:59	86340.00	25.5	20.4	4537767.00	104.17	3630213.60	83.34	20.83
24.00	86400.00	25.5	20.4	4539297.00	104.21	3631437.60	83.37	20.84

APPENDIX D: REFERENCES

FALCON DRAINAGE BASIN PLANNING STUDY
SELECTED PLAN REPORT
FINAL - SEPTEMBER 2015

Prepared for:



El Paso County Public Services Department
3275 Akers Drive
Colorado Springs, CO 80922

Prepared By:



Matrix Design Group
2435 Research Parkway, Suite 300
Colorado Springs, CO 80920

Matrix Project No. 10.122.003

BOCC

RESOLUTION NO. 15- 387

BOARD OF COUNTY COMMISSIONERS
COUNTY OF EL PASO, STATE OF COLORADO

RESOLUTION TO RECOGNIZE AND ADOPT THE
FALCON DRAINAGE BASIN PLANNING STUDY AND TO ESTABLISH A
DRAINAGE FEE AND BRIDGE FEE FOR THE BASIN (CHWS1400)

WHEREAS, the Board of County Commissioners of the County of El Paso ("Board") has the authority granted to it under the provisions of §§30-11-101, (1)(e), and 30-11-107, (1)(e), C.R.S., to represent the County and exercise its further powers to address concerns of the County in all cases where no other provisions are made by law; and

WHEREAS, a plan for the development of drainage basins of mutual concern was adopted by the El Paso County Planning Commission as part of the County Master Plan on December 17, 1984 and has been subsequently amended; and

WHEREAS, Section 30-28-133(11), C.R.S., authorizes counties to adopt subdivision regulations providing for the payment of a sum of money or proof of a line of credit or other fees in equitable contribution to the total costs of the drainage facilities in the drainage basin in which the subdivision is located; and

WHEREAS, Section 8.5.5 of the *El Paso County Land Development Code* provides for the assessment of drainage basin and bridge fees and for the repayment to a subdivider, from any surplus basin funds available, of any costs the subdivider incurs because of compliance with the plans for the development of drainage basins in excess of the sum of the drainage basin fees assessed against the subdivider's impervious acreage; and

WHEREAS, the Board of County Commissioners of El Paso County, Colorado, Resolution 87-178A, authorized creation of the *City of Colorado Springs/El Paso County Drainage Criteria Manual* to set forth provisions for drainage policies, criteria, finance, and administration; and

WHEREAS, said manual has been further modified by Resolutions Nos. 88-58, 91-334, 95-81, 01-384, 04-483, 15-42 and others; and

WHEREAS, the El Paso County Public Services Department initiated an update to the Falcon Drainage Basin Planning Study dated December 15, 2000 (approved by the Planning Commission on October 17, 2000 and the Board of County Commissioners on December 14, 2000); and

WHEREAS, in accordance with the procedures outlined in the aforementioned *City of Colorado Springs/El Paso County Drainage Criteria Manual*, the El Paso County Public

Approved
El Paso County
Planning Commission
This 15th day of March 20 16

Tracy Garcia
Chair
Tracy Garcia
Secretary

Table of Contents

1.0 INTRODUCTION.....	1-1	4.1. Introduction.....	4-1
1.1. Contract Authorization.....	1-1	4.2. Open Channel Hydraulics.....	4-1
1.2. Purpose and Scope.....	1-1	4.2.1. Hydraulic Structure Inventory & Field Work.....	4-1
1.3. Previous Studies.....	1-1	4.2.2. HEC-RAS Modeling.....	4-1
1.4. Summary of Data Obtained.....	1-1	4.2.3. Reaches.....	4-1
1.5. Project Coordination.....	1-2	4.2.4. Manning’s n Values.....	4-2
1.6. Acknowledgements.....	1-2	4.2.5. Cross-sections.....	4-3
2.0 SUMMARY OF ENVIRONMENTAL RESOURCES.....	2-1	4.2.6. Ineffective Flow.....	4-3
2.1. Wildlife.....	2-1	4.2.7. Bridges and Culverts.....	4-3
2.2. Wetlands and Riparian Areas.....	2-3	4.2.8. Detention Pond Outlet Works.....	4-3
2.3. Vegetation.....	2-3	4.2.9. Steady Flow and Boundary Conditions.....	4-4
2.4. Erodible Soils.....	2-3	4.2.10. Approximate Floodplains.....	4-4
2.5. Shallow Groundwater.....	2-3	4.3. Storm Sewer Modeling.....	4-4
2.6. Hazardous Materials.....	2-3	4.4. Deficiencies.....	4-5
2.7. Historic Resources.....	2-4	4.4.1. Potential Detention Pond Deficiencies.....	4-5
2.8. Clean Water Act Section 303d.....	2-5	4.4.2. Drainageway Crossing Deficiencies.....	4-5
2.9. Development Impacts.....	2-5	4.4.3. Storm Sewer Deficiencies.....	4-5
3.0 HYDROLOGIC ANALYSIS.....	3-1	4.4.4. Areas of Geomorphic Instability.....	4-5
3.1. Watershed Description.....	3-1	5.0 ALTERNATIVES ANALYSIS.....	5-1
3.2. Methodology.....	3-1	5.1. Introduction.....	5-1
3.3. HEC-HMS Model.....	3-1	5.2. Planning Reach Delineation.....	5-1
3.4. Subbasin Delineation.....	3-1	5.3. Evaluation of Detention Alternatives.....	5-1
3.5. Hydrologic Soil Groups.....	3-2	5.3.1. Do Nothing Alternative.....	5-2
3.6. Land Use.....	3-2	5.3.2. Regional Detention Alternative.....	5-2
3.7. Runoff Curve Number Development.....	3-3	5.3.3. Sub Regional Detention Alternative.....	5-2
3.8. Initial Abstraction.....	3-4	5.3.4. Hydrologic Results.....	5-3
3.9. Time of Concentration.....	3-4	5.3.5. Detention Alternative Comparison.....	5-5
3.10. Channel Routing.....	3-5	5.3.6. Woodmen Hills Detention Pond #4.....	5-5
3.11. Detention Ponds.....	3-5	5.3.7. Detention Alternative Conceptual Cost Estimate.....	5-5
3.12. Hypothetical Rainfall.....	3-5	5.4. Evaluation of Reach Alternatives.....	5-6
3.13. Results.....	3-6	5.4.1. Protect In Place.....	5-6
3.14. Model Comparison.....	3-6	5.4.2. Natural Channel Design.....	5-6
4.0 HYDRAULIC ANALYSIS.....	4-1	5.4.3. Small Drop Structures.....	5-6
		5.4.4. Large Drop Structures.....	5-6
		5.4.5. Fully-Lined Channel.....	5-6

5.4.6.	Reach Alternative Comparison	5-6
5.4.7.	Immediate Action Required.....	5-7
5.4.8.	Reach Alternative Conceptual Cost Estimate.....	5-7
5.5.	Recommended Alternative.....	5-7
5.5.1.	Utility Coordination	5-8
6.0	PLAN DEVELOPMENT DESIGN	6-1
6.1.	Introduction	6-1
6.2.	Selected Detention Alternative.....	6-1
6.2.1.	Detention Pond Classification.....	6-1
6.2.2.	Hydrologic Results.....	6-1
6.2.3.	Detention Pond Sizes & Cost Estimate.....	6-2
6.2.4.	Detention Pond Phasing Priority.....	6-3
6.3.	Selected Reach Alternatives.....	6-3
6.3.1.	Reach Evaluation	6-3
6.3.2.	Bridge & Culvert Crossing Evaluation.....	6-3
6.3.3.	Plans & Profiles	6-4
6.3.4.	Reach Quantities & Cost Estimate.....	6-4
6.3.5.	Immediate Action Required.....	6-6
6.3.6.	Protect In Place	6-6
6.3.7.	Reach Phasing Priority.....	6-6
6.4.	Cost Summary	6-6
7.0	FEE DEVELOPMENT	7-1
7.1.	Introduction	7-1
7.2.	Developable Land	7-1
7.3.	Fee Calculation & County Cost	7-1
8.0	REFERENCES	8-1
Table 1-1.	Major Data Sources and Data Obtained	1-1
Table 2-1.	Federal and State Threatened and Endangered Species and Species of Special Concern within the Falcon Watershed.....	2-2
Table 2-2.	Cultural Resources and Their Eligibility.....	2-6
Table 3-1.	HEC-HMS Model Components	3-1
Table 3-2.	Drainage Plans within the Falcon Watershed.....	3-2
Table 3-3.	Hydrologic Soil Groups within the Falcon Watershed.....	3-2
Table 3-4.	Historical Land Use Classes within Falcon Watershed.....	3-3
Table 3-5.	Existing Land Use Classes within Falcon Watershed	3-3
Table 3-6.	Future Land Use Classes within Falcon Watershed	3-3
Table 3-7.	Representative CN Values by Land Use	3-4

Table 3-8.	Average Runoff Curve Numbers within the Falcon Watershed.....	3-4
Table 3-9.	Time of Concentration Summary for the Falcon Watershed.....	3-5
Table 3-10.	Channel Characteristics within Falcon Watershed.....	3-5
Table 3-11.	Detention Pond Summary for the Falcon Watershed.....	3-5
Table 3-12.	Rainfall Depths within the Falcon Watershed.....	3-6
Table 3-13.	Comparison of Model Parameters	3-6
Table 3-14.	Flood Summary for the Falcon Watershed Outlet.....	3-7
Table 3-15.	Peak Flows at Points of Interest within the Falcon Watershed	3-8
Table 3-16.	Peak Flow Volumes at Points of Interest within the Falcon Watershed	3-9
Table 3-17.	Flood Summary at LOMR Locations	3-10
Table 4-1.	West Tributary Drainageway Crossings.....	4-1
Table 4-2.	West Tributary 100-yr Velocity & Shear Stress Summary	4-2
Table 4-3.	Middle Tributary Drainageway Crossings	4-2
Table 4-4.	Middle Tributary 100-yr Velocity & Shear Stress Summary	4-2
Table 4-5.	East Tributary Drainageway Crossings	4-2
Table 4-6.	East Tributary 100-yr Velocity & Shear Stress Summary	4-2
Table 4-7.	Manning's n Values.....	4-2
Table 4-8.	East Tributary Split Flow at Blaney Road.....	4-4
Table 4-9.	Existing Potential Detention Pond Deficiencies.....	4-5
Table 4-10.	Future Potential Detention Pond Deficiencies	4-6
Table 4-11.	Drainageway Crossing Deficiencies.....	4-7
Table 4-12.	Storm Sewer Deficiencies	4-8
Table 5-1.	Regional Detention Alternative.....	5-2
Table 5-2.	Sub Regional Detention Alternative.....	5-3
Table 5-3.	Peak Flows at Points of Interest within the Falcon Watershed for Detention Alternatives	5-4
Table 5-4.	Detention Pond Alternative Scoring Matrix.....	5-5
Table 5-5.	Release Rates from Woodmen Hills Detention Pond #4.....	5-5
Table 5-6.	Detention Alternative Cost Summary	5-6
Table 5-7.	Reach Alternative Scoring Matrix.....	5-7
Table 5-8.	Reach Alternative Cost Summary	5-7
Table 5-9.	Total Cost Summary.....	5-8
Table 6-1.	Existing Pond Outlet Modifications	6-1
Table 6-2.	Proposed Pond Outlet Configurations	6-1
Table 6-3.	Selected Detention Alternative Results	6-2
Table 6-4.	Detention Pond Cost Estimate.....	6-2
Table 6-5.	Detention Pond Phasing Priority	6-3
Table 6-6.	Selected Reach Alternatives.....	6-3
Table 6-7.	Existing Bridge and Culvert Crossing Evaluation.....	6-4
Table 6-8.	Roadside Ditch Cost Estimate	6-4
Table 6-9.	Natural Channel Design Reaches Cost Estimate.....	6-5
Table 6-10.	Small Drop Structure Reaches Cost Estimate	6-5
Table 6-11.	Crossing Replacement Cost Estimate.....	6-6
Table 6-12.	Cost Summary	6-6
Table 7-1.	Land Classification.....	7-1
Table 7-2.	County Cost.....	7-1
Table 7-3.	Metropolitan District Cost.....	7-1
Table 7-4.	Development Drainage Cost and Fee	7-1
Table 7-5.	Development Bridge Cost and Fee.....	7-1

3.0 HYDROLOGIC ANALYSIS

3.1. Watershed Description

The Falcon Watershed is located in the north central portion of El Paso County (County) and flows southeasterly from the southern slope of the Black Forest. The Falcon Watershed contains three perennial streams and has a contributing drainage area of approximately 10.6 square miles (sq mi) at its confluence with Black Squirrel Creek. A routing schematic of the Falcon Watershed is provided in Figure 3-1.

The headwaters of the Falcon Watershed are dominated by ponderosa pine forest and grassland on undeveloped large acreage tracts and 2- to 5-acre (ac) rural residential lots. The middle portion of the Falcon Watershed between Londonderry Drive and Highway 24 has been developed into residential areas consisting primarily of single-family homes, commercial centers, and vacant land. The lower portion of the Falcon Watershed south of Highway 24 is dominated by grassland on undeveloped large acreage tracts and 2- to 5-acre (ac) rural residential lots. A basin map of the Falcon Watershed is provided in Figure 3-2.

3.2. Methodology

Hydrologic analysis for the Falcon Watershed was completed for historical, existing, and future land use conditions by applying a 24-hour storm event with 2-, 5-, 10-, 25-, 50-, and 100-year recurrence intervals. The following sections provide a summary of the hydrologic analyses. A detailed compilation of hydrology model data, calculations, and results are provided in Appendix A.

3.3. HEC-HMS Model

A hydrology model for the Falcon Watershed was developed using the US Army Corps of Engineers (USACE) Hydrologic Engineering Center – Hydrologic Modeling System Version 3.5 (HEC-HMS) to simulate the rainfall-runoff process and generate flood hydrographs for select storm events. Each component of the model is described in detail following this section. A geospatially referenced basin model was developed in ArcGIS® Version 9.2 using USACE’s Geospatial Hydrologic Modeling Extension (HEC-GeoHMS). Using these tools, subbasin and stream reach physical characteristics including area, longest hydraulic flowpath, reach length, slope, and topological connectivity were extracted for calculation of hydrologic parameters. Hydrologic parameters were calculated as outlined below and populated to the basin and meteorological components of the HEC-HMS model. A summary of selected methodologies for each HEC-HMS model component is provided in Table 3-1.

The Specified Hyetograph method was chosen to model the Type IIa hypothetical storm event recommended in the City of Colorado Springs and El Paso County Drainage Criteria Manual (DCM) (1991) with rainfall depths published in *NOAA Atlas II Vol. 3 (Miller et al. 1973)*. These hyetographs were imported into the HEC-HMS precipitation gage manager and applied to each subbasin within the Falcon Watershed. Rainfall was modeled with a uniform spatial distribution across the entire Falcon Watershed.

Infiltration and runoff volumes were modeled using the SCS (since renamed NRCS) Runoff Curve Number (runoff CN) Loss Method. The composite runoff CN was calculated for each subbasin and imported into HEC-HMS. For modeling purposes, initial infiltration loss rates were automatically calculated as functions of composite runoff CNs by HEC-HMS.

Table 3-1. HEC-HMS Model Components

Model Component	Selected Methodology
Meteorological Model	Specified Hyetograph
Infiltration Loss	SCS Runoff Curve Number Method
Runoff Transformation	SCS Unit Hydrograph Method
Channel Routing	Muskingum-Cunge Method
Baseflow Method	None

Notes:

SCS = Soil Conservation Service (since renamed Natural Resources Conservation Service)

The transformation of runoff volume to a runoff hydrograph was modeled using the SCS Unit Hydrograph Method. Subbasin lag times were calculated from the time of concentration as computed using the method outlined in *Technical Release 55 (TR-55)* (NRCS 1986).

The Muskingum-Cunge Method was selected to develop the channel routing component of the HEC-HMS model. Eight-point cross sections developed from 2-foot (ft) contour data were used to represent open channel reaches while circular and rectangular sections were used to represent storm sewer reaches, as applicable.

3.4. Subbasin Delineation

Matrix subcontracted Aerial Mapping Services to obtain and develop orthometric aerial imagery of the current conditions within the Falcon Watershed to assist with the DBPS. Basin delineation and stream network definition were completed in an ArcGIS® environment using 2-ft contours, information obtained from field reconnaissance, and the storm sewer GIS coverage obtained from the County.

The Falcon Watershed was divided into 65 subbasins with areas ranging from 0.03 sq mi (19 ac) up to 0.33 sq mi (211 ac) as shown on Figure 3-2. Subbasin slopes in the Falcon Watershed range from 2.9% to 8.7%. Subbasins were delineated at tributaries, major road crossings, changes in slope, changes in land use, and major drainage features. Information obtained from drainage plans was used to supplement the basin delineation within developed areas when all other pieces of information did not provide a clear direction of delineation. Table 3-2 lists all drainage plans received from the County that were reviewed and incorporated as necessary.

The Falcon Watershed was divided into 3 major subbasins: West Tributary (WT), Middle Tributary (MT), and East Tributary (ET) as shown on Figure 3-2. The West Tributary consists of 37 subbasins and 10 minor tributaries along the entire length of the watershed from the Black Forest to the confluence with Black Squirrel Creek. These subbasins primarily encompass rural land with pockets of residential development. The Middle Tributary consists of 11 subbasins and 2 minor tributaries and is primarily north of Highway 24. These subbasins encompass rural, residential, and commercial land. The East Tributary consists of 16 subbasins and 1 minor tributary and encompasses residential land north of Highway 24 and rural land south of Highway 24.

Table 3-2. Drainage Plans within the Falcon Watershed

Beckett at Woodmen Hills Filing 1	Meridian Ranch Filing 4
Beckett at Woodmen Hills Filing 2	Paint Brush Hills Filing 4 Drainage Analysis
Beckett at Woodmen Hills Filing 3	Paint Brush Hills Filing 5
Courtyards at Woodmen Hills North Filing 1	Paint Brush Hills Filing 9
Courtyards at Woodmen Hills South Filing 1	Paint Brush Hills Filing 10
Courtyards at Woodmen Hills South Filing 2	Paint Brush Hills Filing 11
Courtyards at Woodmen Hills West	Paint Brush Hills Filing 12
Falcon Highlands Filing 1	Woodmen Hills Filing 1
Falcon Highlands Filing 2	Woodmen Hills Filing 4
Falcon Highlands Market Place Filing 1	Woodmen Hills Filing 5
Falcon Highlands Market Place Filing 2	Woodmen Hills Filing 6
Falcon Vista Subdivision Filing 1	Woodmen Hills Filing 7C & G
Falcon Vista Subdivision Filing 2	Woodmen Hills Filing 8
Forest Gate Subdivision	Woodmen Hills Filing 9
Latigo Business Center Filing 1	Woodmen Hills Filing 10
The Meadows Filing 3	Woodmen Hills Filing 11
Meridian Crossing Filing 1	

The Falcon South (FS) subbasin is a single subbasin at the southern portion of the Falcon Watershed that lies directly to the west of the watershed outlet. This subbasin does not contain any tributaries and discharges directly south of the Falcon Watershed outlet. The drainage area from the FS subbasin was previously included in the Falcon Watershed in the 2000 Falcon DBPS (URS Corporation 2000). However, based on new topographic data and aerial photography it was determined that this subbasin is not a part of the Falcon Watershed but was evaluated as a part of this DBPS for comparison purposes.

The subbasins delineated for the existing watershed condition are assumed to also represent both the historical (undeveloped) and future (full build-out) conditions. The reason for this is to maintain consistent comparison points with identical drainage areas when evaluating detention and channel improvement alternatives later in this report. Subbasin delineations were likely much different in the historical condition due to the absence of development and have the potential to change significantly as a result of future development. These changes are not able to be identified at this point due to data limitations and ambiguity of future development patterns.

Currently, there is a diversion berm that exists in the northwest portion of the Falcon Watershed as shown on Figure 3-1. This berm will divert approximately 195 cfs out of the Falcon Watershed. However, according to the County it can be assumed that this berm did not exist during the historical watershed conditions nor will it exist for the future watershed condition because this area is planned to be developed in the future and will likely result in the berm being removed.

3.5. Hydrologic Soil Groups

Soils are classified into hydrologic soil groups (HSG) by the NRCS for hydrologic modeling. HSG is a parameter assigned to each soil series by the NRCS to reflect the relative rate of infiltration of water into the soil profile. *TR-55* defines HSGs into A, B, C, and D groups.

The HSG was determined for each of the soil mapping units from the NRCS Soil Survey Geographic (SSURGO) data for the County. Only two of the four HSGs are found within the Falcon Watershed. Group B soils, with moderate infiltration rates, dominate the Falcon Watershed at 42% coverage. According to the SSURGO data there is an equally large coverage of HSG A soils, however, most of this coverage lies within or near development. Any areas within the HSG A coverage that have been regraded as part of urban development were regrouped to HSG B for runoff CN calculations that are described later. The reason for this is that as soon HSG A soils are disturbed or regraded the high infiltration rates associated with these soils are lost due to compaction. A HSG map is provided in Figure 3-3 that shows the distribution and coverage of each group within the Falcon Watershed. Table 3-3 shows the percentage of each HSG present in the Falcon Watershed.

Table 3-3. Hydrologic Soil Groups within the Falcon Watershed

Hydrologic Soil Groups	Coverage
A	9.9%
B	41.8%
B (Re-graded A Soils)	48.1%
C	0.0%
D	0.0%
Water	0.1%

3.6. Land Use

Historical land use conditions were assigned based on the land use categories defined in *TR-55* that are consistent with the native land uses within the watershed. Historical land use conditions represent an undeveloped watershed condition and were used as the underlying land use for runoff CN development as described below. Undeveloped land use conditions listed in *TR-55* are separated by good, fair, and poor condition. Woods (Good Condition) is the dominant underlying land use in upper portion of the Falcon Watershed while Rangeland (Good Condition) is the dominant underlying land use throughout the remainder of the watershed. Each of these land uses categories were assigned a good condition based on field observation of ground cover.

Existing and future land use information for the Falcon Watershed was obtained from the County GIS department. Existing land use data was developed in 2010 and was derived from the Assessor's parcel database. Future land use data represents development conditions sometime after 2030 and represents the current prediction of a full basin build-out scenario.

The Falcon Watershed reflects a variety of existing land uses including rural, grazing and farmland, rural residential, urban, commercial and industrial, vacant, and rights-of-way. Due to urban growth, land use is expected to change in the future condition with significant residential development planned in the middle portion of the watershed.

Historical, existing, and future land use conditions are shown in Figure 3-4, Figure 3-5, and Figure 3-6, respectively. Rangeland (Good Condition) was the dominant land use in historical conditions at 94%; while rural/rural residential is the dominant land use for existing and future conditions at 43% and 49%, respectively. Table 3-4, Table 3-5, and Table 3-6 outline major basin coverage by land use class for historical, existing, and future conditions.

Table 3-4. Historical Land Use Classes within Falcon Watershed

Land Use ¹	Coverage
Woods (Good Condition)	5.9%
Rangeland (Good Condition)	94.1%

Notes:
¹ As defined in TR-55

Table 3-5. Existing Land Use Classes within Falcon Watershed

Land Use	Coverage
Rural	27.0%
Rural Residential	16.0%
Urban	14.7%
Vacant > 5 Acres	11.8%
Grazing Land	8.2%
Political Subdivision	4.4%
Commercial	2.4%
State	2.3%
Vacant 2.5 Acres – 5 Acres	1.6%
County	1.1%
Vacant < 2.5 Acres	1.0%
Other	9.5%

Table 3-6. Future Land Use Classes within Falcon Watershed

Land Use	Coverage
5 Acre Rural Residential	43.4%
0.5 Acre Residential	17.4%
Exclusion	16.3%
Single Family Urban	11.0%
2.5 Acre Rural Residential	5.4%
Schools and Colleges	1.9%
Service Commercial	1.5%
Parks	1.2%
Other	1.9%

3.7. Runoff Curve Number Development

Runoff CN is a parameter developed by the NRCS to quantify the relationship between rainfall, infiltration, and runoff. It represents the combination of a HSG and a land use class and condition (McCuen 1998). Runoff CNs are estimated as a function of land use, impervious cover, HSG, and antecedent moisture condition (AMC).

Historical runoff CNs were assigned to each subbasin based on HSG and underlying TR-55 land use class and condition. Within an ArcMap® GIS environment, discrete grid combinations of HSG and underlying land uses were developed. Assuming an average AMC, runoff CNs were determined for each unique soil/land use combination and composite runoff CNs for each subbasin were calculated.

Existing runoff CNs were assigned to each subbasin based on the percent impervious cover and an underlying TR-55 land use class and condition. Additionally, public gravel roads were included as a part of the CN calculation but were assigned independently of impervious area and underlying land use. The impervious area coverage was developed from the orthometric data obtained from Aerial Mapping Services that included planimetric data of roads, parking lots, and rooftops. This data was supplemented with manual delineation of driveways and the County’s Parcel, Right of Way (ROW), and Building Footprint GIS data. Within an ArcMap® GIS environment, discrete grid combinations of HSG and underlying land uses were developed. Assuming an average AMC, runoff CNs were determined for each unique soil/land use combination based on presence or absence of impervious cover in the grid cell while evaluating gravel roads separately. The impervious areas were given a CN of 98, gravel roads were given a CN of 85, and all underlying areas were given a CN from TR-55 based on the HSG and a woods-, open space-, or range land-land use. Composite runoff CNs were calculated from the gridded CN values within each subbasin. Figure 3-7 shows the existing impervious areas and provides the percent impervious by land use class and subbasin.

Future runoff CNs were assigned to each subbasin by using the existing CN grid in combination with representative CN values that were assigned to existing vacant land planned for future development. Representative CN values were developed by calculating composite CN values for each land use class in the existing condition that is planned for future conditions. Representative CN values were only developed for vacant land that is identified in the existing land use coverage as Dry Farmland, Grazing Land, County, Political Subdivision, State, Other, and Vacant land. Composite runoff CNs were calculated from the gridded CN values within each subbasin. Table 3-7 outlines representative CN values for future land use classes.

Figure 3-8, Figure 3-9 and Figure 3-10 show the discrete combinations of CNs used to develop the composite CNs for historical, existing, and future conditions, respectively.

Table 3-8 shows the area-weighted CN averages for historical, existing, and future conditions with the Falcon Watershed.

Table 3-7. Representative CN Values by Land Use

Land Use	Representative CN
Single Family Urban	79
0.5 Acre Residential	71
2.5 Acre Rural Residential	64
5 Acre Rural Residential (Rangeland Land Use)	62
5 Acre Rural Residential (Woods Land Use)	58
Schools & Colleges	69
Community Commercial/Service Commercial	81
Light Industrial	96

Table 3-8. Average Runoff Curve Numbers within the Falcon Watershed

Land Use	Historical CN	Existing CN	Future CN
Falcon Watershed	48	62	66

3.8. Initial Abstraction

Initial abstraction represents all water losses before runoff begins and is a function of the potential maximum water retention of soil. Initial abstraction includes water retained in surface depressions, water intercepted by vegetation, evaporation, and infiltration (*TR-55*). Conventional modeling uses an initial abstraction ratio of 0.20 which is also the default value in HEC-HMS. However, newer publications such as *Curve Number Hydrology* (ASCE/EWRI 2009) have revealed that an initial abstraction ratio of 0.20 is far too high for most applications and that an initial abstraction ratio of 0.05 is more appropriate for general application. Additionally, Matrix recently completed an extensive model calibration for the Jimmy Camp Creek watershed using measured rainfall and runoff information as a part of the Stormwater Management Assessment and Standards Development project for the City of Colorado Springs. The results of this analysis showed that an initial abstraction ratio of 0.10 is representative of the conditions in this area. As a result, an initial abstraction ratio of 0.10 was used for runoff calculations for the Falcon Watershed.

3.9. Time of Concentration

The time of concentration (T_c) was calculated by summing the travel time for overland sheet flow, shallow concentrated flow, and channel flow segments along the hydraulically longest flowpath as outlined in *TR-55*. The longest flowpaths were delineated using HEC-GeoHMS and manually modified to match the drainage patterns in the subbasins based on existing topology, roads, inlets, and culvert crossings.

Overland flow was assumed to occur within the first 300 ft and may end before 300 ft if development or a concentrated flow condition is encountered, as described in *TR-55*. Shallow concentrated flow occurs after overland flow and before channel flow occurs. In some instances shallow concentrated flow may not occur if overland flow transitions directly to channel flow. Channel flow occurs after shallow concentrated flow or, in some cases overland flow, where surveyed channel cross section information has been obtained, where a defined channel is apparent in aerial photography or contours, or where streams appear on United States Geological Survey (USGS) quadrangle sheets and transports the runoff to the outlet of the subbasin. Detailed time of concentration calculations are provided in Appendix A.

Time of concentration calculations were completed for existing conditions for each of the 65 Falcon Watershed subbasins using overland, sheet, and channel flow segments. The longest flowpaths and corresponding time of concentration values were likely much slower for historical conditions because of the absence of development. The longest flowpaths and corresponding time of concentration values will also likely change in the future condition but are not able to be identified at this point due to data limitations and ambiguity of future development patterns.

To account for changing development conditions, time of concentration values for undeveloped subbasins were compared to the values calculated for developed subbasins in order to determine the impact that development has on this parameter. Undeveloped subbasins were identified as subbasins with minimal (< 3% impervious area) or no development and where the longest flowpaths and time of concentration calculations were not impacted by development. In this watershed, the time of concentration for developed subbasins was calculated to be approximately 25% shorter for undeveloped subbasins meaning that water moves through the subbasin faster.

Time of concentration values are typically longer for historical conditions compared to existing conditions because the overland and sheet flow segments are not shortened by development or because of an extended channel flow segment. Also, channel flow segments occur in natural channels versus storm sewers and roadway drainage systems, which lengthens the time of concentration due to increased channel roughness. Time of concentration values were lengthened for historical conditions so that the reduction in time of concentration to existing conditions was 25%. This was completed for all subbasins other than the subbasins that were identified as undeveloped for existing conditions.

Time of concentration values for future conditions are typically shorter compared to existing conditions because of the increase in development, reduction in overland and sheet flow segment lengths, and increase in channel flow segment lengths. Time of concentration values were shortened for future conditions by reducing the existing time of concentration values by 25% for all subbasins except where there is no change in development between existing and future conditions.

A summary of the time of concentration values for the Falcon Watershed is provided in Table 3-9.

Table 3-9. Time of Concentration Summary for the Falcon Watershed

	Historical T _c	Existing T _c	Future T _c
Minimum	8 min	6 min	5 min
Maximum	153 min	115 min	86 min
Average	51 min	41 min	34 min

Notes:
min = minutes

3.10. Channel Routing

The Muskingum-Cunge method was used for channel routing in 70 reaches in the Falcon Watershed, which is dominated by a wide, grass bottom channel. Reach delineations were performed for existing conditions and were likely much different historically because of the absence of development. Reach delineations will also likely change in the future condition but are not able to be identified at this point due to data limitations and ambiguity of future development patterns. Manning's channel roughness coefficient (Manning's n) values for earthen channels were assigned based on published values. Storm sewer reaches were represented as either circular or rectangular cross sections and were assigned a Manning's n value of 0.013. Table 3-10 outlines the channel characteristics in the Falcon Watershed.

Table 3-10. Channel Characteristics within Falcon Watershed

	West Tributary		Middle Tributary		East Tributary	
	Slope	Manning's n	Slope	Manning's n	Slope	Manning's n
Minimum	0.50%	0.013	0.40%	0.013	0.40%	0.030
Maximum	2.9%	0.070	2.1%	0.070	2.1%	0.070
Average	1.7%	0.047	1.5%	0.044	1.3%	0.049

3.11. Detention Ponds

Fifteen existing detention ponds were included in the Falcon Watershed HEC-HMS model. According to discussion with the County, no as-built drawings exist for any of these detention ponds and the stage-storage-discharge relationships published in available drainage plans and reports are not reliable. As a result, Matrix developed stage-storage-discharge relationships using 2-ft contour information and field measurements of the outlet structures for each of the 15 detention ponds. The stage-storage-discharge relationships developed for this DBPS should only be used for planning purposes and not for further design of any the existing detention ponds in the Falcon Watershed. Detailed survey information should be obtained for any of the existing ponds where additional design is desired.

According to Falcon Highlands Final Drainage Report Filing No. 1 (URS Corporation 2005), Regional Pond WU was intended to be an off-line detention pond with a constructed weir to control flow into the pond from the main channel. However, based on field observation and measurements Regional Pond WU is an on-line detention pond that captures all flow from the upstream channel up to the elevation of the secondary outlet structure which discharges flow to the adjacent channel.

There are several stock ponds throughout the Falcon Watershed that appear to always remain full and do not have any apparent outlet structures. These ponds provide minimal flood attenuation and were not modeled using a detention reservoir model. All detention pond locations are shown on Figure 3-1. Detention pond characteristics are summarized in Table 3-11.

Note that all detention ponds must be approved by the Federal Emergency Management Agency (FEMA) before a hydrology model can be approved by FEMA. FEMA-approved ponds likely consist only of County- and District-owned and maintained ponds and likely do not include privately-owned and maintained ponds. Some of the ponds included in this analysis are within developments and are possibly privately owned and maintained.

Table 3-11. Detention Pond Summary for the Falcon Watershed

Detention Pond	I.D.	Location	Surface Area (ac)	Vol. (ac-ft)	Initial Condition ²
Meadows Pond #1	M 1	600 ft east of Towner Ave. on Woodmen Hills Dr.	1.0	2.2	Initial Storage = 0
Meadows Pond #2	M 2	2,100 ft east of Towner Ave. on Woodmen Hills Dr.	1.6	6.3	Initial Storage = 0
Paint Brush Hills Pond #4	PBH 4	Northeast corner of Brockton Ln. & Liberty Grove Dr.	0.90	1.3	Initial Storage = 0
Paint Brush Hills Pond A	PB A	300 ft west of Keating Dr. on Rockingham Dr.	1.1	2.6	Initial Storage = 0
Paint Brush Hills Pond B1	PB B1	North of Duxbury Dr.	1.6	9.2	Initial Storage = 0
Paint Brush Hills Pond B2	PB B2	East of Duxbury Dr.	2.5	12	Initial Storage = 0
Paint Brush Hills Pond C	PB C	East of London Derry Dr. & Rockingham Dr.	1.9	6.8	Initial Storage = 0
Regional Pond MN	R MN	Between Meridian Rd. & McLaughlin Rd.	2.1	7.5	Initial Storage = 0
Regional Pond WU ¹	R WU	Southwest corner of Meridian Rd. & Tamlin Rd.	6.5	41	Initial Storage = 0
Woodmen Hills Pond #1 ¹	WH 1	500 ft east of Tompkins Rd. on Woodmen Hills Dr.	3.6	16	Initial Storage = 0
Woodmen Hills Pond #2	WH 2	West of Ledoux Rd.	2.8	9.2	Initial Storage = 0
Woodmen Hills Pond #3	WH 3	North of Tompkins Rd. & Eastonville Rd.	5.5	8.4	Initial Storage = 0
Woodmen Hills Pond #4	WH 4	Northeast corner of Woodmen Rd. & Hwy. 24	8.1	22	Initial Storage = 0
Woodmen Hills Pond #5	WH 5	South of Corbu Heights & Maybeck view	1.5	4.1	Initial Storage = 0
Woodmen Hills Pond H	WH H	Northwest corner of Meridian Rd. & Woodmen Hills Dr.	1.0	2.7	Initial Storage = 0

Notes:

¹ Pond is divided by road. Values represent cumulative value of both areas.

² All detention ponds were assumed to be empty at the beginning of the model simulation.

3.12. Hypothetical Rainfall

A hypothetical rainfall event was used to simulate precipitation for hydrologic analyses. The SCS Type IIa 24-hour storm distribution is recommended for temporal distribution in the DCM. Storm

events with 2-, 5-, 10-, 25-, 50-, and 100-year recurrence intervals were selected for hydrologic modeling. These storm events have an equivalent of a 50-, 20-, 10-, 4-, 2-, and 1-percent chance of exceedance annually, respectively.

Isopluvial maps published in *NOAA Atlas 2 Vol. III* (Miller et al. 1973) were used to estimate rainfall in the Falcon Watershed for each recurrence interval. Since the Falcon Watershed is slightly larger than 10 sq mi, an areal reduction of 2% was applied as prescribed by *NOAA Atlas 2 Vol. III*. Table 3-12 provides the 24-hour rainfall depths for each recurrence interval.

Table 3-12. Rainfall Depths within the Falcon Watershed

Recurrence Interval	Unadjusted Rainfall Depths	Areal Adjusted Rainfall Depths ¹
2-year	2.0 in.	1.96 in.
5-year	2.6 in.	2.55 in.
10-year	3.0 in.	2.94 in.
25-year	3.8 in.	3.72 in.
50-year	4.2 in.	4.12 in.
100-year	4.6 in.	4.51 in.

Notes:
¹ Areal reduction of 2% applied to rainfall depths from the *NOAA Atlas 2 Vol. III*

The areal adjusted rainfall depths for all modeled storm events were multiplied by each ordinate of the SCS Type IIa 24-hour temporal unit distribution to develop hyetographs for each storm event.

3.13. Results

The HEC-HMS model for the Falcon Watershed was run to simulate the rainfall-runoff process and generate flood hydrographs for historical, existing, and future land use conditions by applying a 24-hour storm event with 2-, 5-, 10-, 25-, 50-, and 100-year recurrence intervals. As expected, future peak flows increased over existing conditions in conjunction with planned development. Table 3-15 provides a brief summary of peak flows at points of interest within the Falcon Watershed and Table 3-16 provides a brief summary of flow volumes at the same points of interest. The future conditions model results reported in this section do not reflect any proposed detention, channel improvements, or other alternatives described in later sections of this report. Historical, existing, and future results are summarized graphically on Figure 3-11, Figure 3-12, and Figure 3-13, respectively.

3.14. Model Comparison

Previously published studies and flood flow analyses applicable to the Falcon Watershed include:

- URS Corporation *Falcon DBPS*, 2000
- FEMA Flood Insurance Study (FIS)
- FEMA Letters of Map Revision (LOMR)
- USGS *Analysis of the Magnitude and Frequency of Floods in Colorado*, 2000
- Colorado Water Conservation Board (CWCB) *Guidelines for Determining 100-year Flood Flows for Approximate Floodplains in Colorado*, 2004.

The peak flow results of this modeling effort were compared to the studies and analyses listed above to check for reasonableness. Table 3-14 provides a comparison of peak flow results at the Falcon Watershed outlet from the various flood studies. Flood flows are not published in the FEMA FIS for the tributaries in the Falcon Watershed. However, flood flows at sporadic locations throughout the Falcon Watershed were published in some of the LOMRs completed for developments. A comparison of these flows is provided in Table 3-17.

As shown in Table 3-14 the existing conditions peak flows for this DBPS are higher than the 2000 DBPS for the 5-yr event and lower than the 2000 DBPS for the 100-yr event. The reason for this is because of the lower initial abstraction value that was used for this DBPS. Lowering the initial abstraction ratio has a more noticeable impact on increasing smaller flood flows compared to larger flood flows. A summary of the major differences between this DBPS and the 2000 DBPS are:

- The 2000 DBPS model included 3 detention ponds with a total storage volume of approximately 31 ac-ft while this DBPS includes 15 detention ponds with a total volume of approximately 151 ac-ft.
- The 2000 DBPS did not account for the existing basin diversion in the northwest portion of the watershed
- It is assumed that the 2000 DBPS used an initial abstraction ratio of 0.20. The HEC-1 data that was received from the County shows that the first value in the LS card was left blank which indicates that the default initial abstraction value was used. There is no formal documentation that this value was used, however, this is typically the default initial abstraction ratio for most models. This DBPS used an initial abstraction ratio of 0.10.

A comparison of model parameters between this DBPS and the 2000 DBPS is provided in Table 3-13.

Table 3-13. Comparison of Model Parameters

	CN		T _c (min)		Manning's n	
	2000 DBPS	2011 DBPS	2000 DBPS	2011 DBPS	2000 DBPS	2011 DBPS
Min.	60	41	3.9	6.2	.020	.013
Max.	81	86	33	115	.035	.070
Avg.	61	62	14	41	.034	.047

Table 3-14. Flood Summary for the Falcon Watershed Outlet

Annual Percent Chance Flood Event	Recurrence Interval	Peak Flow (cfs)			
		Matrix HEC-HMS Model ¹		URS Corporation DBPS ²	
		Existing	Future	Existing	Future
50%	2-year	190	230	--	--
20%	5-year	400	560	222	458
10%	10-year	600	860	--	--
4%	25-year	1,200	1,500	--	--
2%	50-year	1,500	2,000	--	--
1%	100-year	1,900	2,500	2,935	3,303

Notes:

- 1) Existing and Future peak flows from the Matrix HEC-HMS model prepared as a part of the Falcon DBPS
- 2) Existing and Future peak flows from the 2000 Falcon DBPS prepared by URS Corporation
- 3) USGS Regression Analysis equations are from "Analysis of the Magnitude and Frequency of Floods in Colorado" Water-Resources Investigations Report 99-4190. The Plains Region covers the entire portion of the Falcon Watershed. Drainage areas for the study ranged from 5 to 1,000 mi². $Q_2=39.0(A)^{0.486}$, $Q_5=195.8(A)^{0.399}$, $Q_{10}=364.6(A)^{0.400}$, $Q_{25}=725.3(A)^{0.395}$, $Q_{50}=1116(A)^{0.392}$, $Q_{100}=1640(A)^{0.388}$, where A = Drainage Area (mi²)
- 4) CWCB Regression Analysis equations are from the "Guidelines for Determining 100-Year Flood Flows for Approximated Floodplains in Colorado" by the Department of Natural Resources Colorado Water Conservation Board, June 2004. ARK-5 includes tributaries east of Monument Creek, including the Black Squirrel Creek based east of Colorado Springs, for tributaries between 4 and 75 mi². $Q=1343.4(A)^{0.578}$. Where A=Drainage Area (mi²).

4.0 HYDRAULIC ANALYSIS

4.1. Introduction

The purpose of the hydraulics analysis was to gain an understanding of the open channel flow characteristics and geomorphic conditions within the Falcon Watershed by:

- Performing an inventory of major drainageway structures
- Performing one-dimensional, steady flow hydraulic analysis for the main stems of West Tributary, Middle Tributary, and East Tributary
- Performing normal depth, full-flow Manning’s equation calculations for the main line of each storm sewer
- Performing field work and aerial photo analysis to identify areas of geomorphic instability

Objectives of this analysis were to identify areas of potential infrastructure deficiency and delineate approximate floodplain boundaries for both the existing and future hydrologic conditions in Section 3.0.

4.2. Open Channel Hydraulics

Hydraulic analyses for existing and future hydrologic conditions were completed for the main stems of West Tributary, Middle Tributary, and East Tributary. These analyses were completed to represent peak flows for the flood events with 2-, 5-, 10-, 25-, 50-, and 100-year recurrence intervals. The hydraulic analyses were completed using the USACE Hydrologic Engineering Center-River Analysis System Version 4.1.0 (HEC-RAS). Summaries of the employed methodology, models, characteristics, and input data used in the hydraulic models are summarized in this section.

4.2.1. Hydraulic Structure Inventory & Field Work

All major drainageway structures that the County is responsible for maintaining on the main stem of each of the three tributaries were measured and inventoried over a period of 2 days. The size of each culvert or bridge crossing was measured with a tape and relative measurements were collected for distance below the top of road and orientation within the creek.

Additionally, the field work performed in Section 3.0 was used for the development of the hydraulic model and identification of erosional areas.

4.2.2. HEC-RAS Modeling

Hydraulic modeling was completed using USACE Hydrologic Engineering Center – Geospatial River Analysis System Version 4.2.92 (HEC-GeoRAS) and HEC-RAS. HEC-GeoRAS was used to define all of the physical reach characteristics. After all preprocessing was complete, reach characteristics were exported to HEC-RAS to perform one-dimensional, steady flow hydraulic calculations.

HEC-GeoRAS was used within ArcMap®, to define the stream centerlines, banks, flow paths, and cross-sections for each reach. The stream centerline follows the channel thalweg to define the reach network. The banks lines differentiate the change in Manning’s n value that typically occurs at the extent of the low flow channel. The flowpath lines identify the centroid of the flow in the left overbank, main channel, and right overbank in order to determine the respective reach lengths. The cross-section lines define the channel dimension to acquire topography information along the reach. Cross-section topography data was obtained from a triangulated irregular network (TIN) that was created from the contour information obtained from Aerial Mapping Services. A HEC-GeoRAS file

that contained three-dimensional coordinates for the stream centerlines and cross-sections, as well as reach stations, bank stations, reach lengths, and stream topology was then imported into HEC-RAS.

Bridges, culverts, and ineffective flow areas were added to the HEC-RAS model after import from HEC-GeoRAS. Physical parameters for measured structures were incorporated into the hydraulic model using HEC-RAS bridge/culvert and cross-section data editors. All of the drainageway crossings were modeled to represent existing conditions which, in many cases, consists of a partially obstructed bridge or culvert. Many of the crossings are obstructed with sedimentation, vegetation growth, and the accumulation of debris. Cleaning and maintenance of these culverts is imperative to restore and maintain flood flow capacities.

4.2.3. Reaches

Each of the three tributaries that were modeled with HEC-RAS was evaluated based upon the existing topography, physical condition of the channel, and the floodplains along each of the tributaries. The modeled reaches are shown in Sheet 4-1 through Sheet 4-37 and described below.

West Tributary: This tributary is the main tributary within the Falcon Watershed and is approximately 9.0 miles in length and flows from Burgess Road to the confluence with Black Squirrel Creek. This tributary is primarily stable and in good condition and consists primarily of a wide grass-lined channel. There are two erosional areas existing along this tributary. One is between Arroya Lane and Stapleton Drive, which is followed by a depositional area, and the other is between Garrett Road and Blaney Road. This tributary crosses 14 structures and one on-line detention ponds that are summarized in Table 4-1. A summary of channel velocities and shear stresses for this tributary are provided in Table 4-2.

Table 4-1. West Tributary Drainageway Crossings

Crossing	HEC-RAS River Station	Location
WT 14	47262	Burgess Rd.
WT 13	45766.17	Pine Park Trl.
WT 11	41441.59	Arroya Ln.
WT 10	21948.92	Woodmen Rd.
WT 9	19961.38	Meridian Rd.
Pond WU Inlet Structure	18654	Tamlin Rd.
Regional Pond WU	17840	Tamlin Rd.
WT 7-2	17647.61	Rail Road
WT 7-1	17517.42	Hwy. 24
WT 6	15318.93	Falcon Hwy.
WT 5	14944.59	Meridian Rd.
WT 5-2	14944.59	Meridian Rd.
WT 4	9806.61	W. Condor Rd.
WT 3	8435.27	Garrett Rd.
WT 1	5398.42	Blaney Rd.

Table 4-2. West Tributary 100-yr Velocity & Shear Stress Summary

Parameter	Existing Conditions		Future Conditions	
	Minimum	Maximum	Minimum	Maximum
Velocity (ft/s)	0.17	12	0.17	13
Shear Stress (lb/ft ²)	0.01	5.9	0.01	6.9

Middle Tributary: This tributary is approximately 2.9 miles in length and flows from Woodmen Hills Drive to its confluence with West Tributary just south of Falcon Highway. This tributary is primarily stable and in good condition and consists primarily of a grass-lined channel north of Woodmen Road and a willow-lined channel south of Hwy. 24. This tributary enters a storm sewer at Woodmen Road through Meridian Road and crosses 8 structures and two on-line detention ponds that are summarized in Table 4-3. A summary of channel velocities and shear stresses for this tributary are provided in Table 4-4.

Table 4-3. Middle Tributary Drainageway Crossings

Crossing	HEC-RAS River Station	Location
The Meadows Pond #2	15205.815	Woodmen Hills Dr.
MT 7	10706	Owl Ln.
MT 6	7238	Woodmen Rd.
MT 6-2	7238	Woodmen Rd.
Regional Pond MN	6420.9204	McLaughlin Rd.
MT 5-1	6276.979	McLaughlin Rd.
MT 4	5184.12	Rail Road
MT 3	5035.56	Hwy. 24
MT 2	3667.171	Swingline Rd.
MT 1	1661.946	Falcon Hwy.

Table 4-4. Middle Tributary 100-yr Velocity & Shear Stress Summary

Parameter	Existing Conditions		Future Conditions	
	Minimum	Maximum	Minimum	Maximum
Velocity (ft/s)	0.43	10	0.6	11
Shear Stress (lb/ft ²)	0.01	9.9	0.02	12

East Tributary: This tributary is approximately 6.2 miles in length and flows from Liberty Grove Drive to its confluence with West Tributary just east of Blaney Road. This tributary transitions between stable, erosional, and depositional areas and consequently transitions between a grass- and willow-lined channel to a sand bottom channel. This reach crosses 12 structures and 6 on-line detention ponds that are summarized in Table 4-5. A summary of channel velocities and shear stresses for this tributary are provided in Table 4-6.

Table 4-5. East Tributary Drainageway Crossings

Crossing	HEC-RAS River Station	Location
ET 32	32376.64	Liberty Grove Dr.
Paint Brush Hills Pond #4	31486	SE of Liberty Grove Dr.
ET 31	28298.89	Stapleton Dr.
ET 30	26454.7	Royal County Down Rd.
ET 26	23413.07	Rio Secco Ln.
Woodmen Hills Pond #1 North	21604.86	Woodmen Hills Dr.
Woodmen Hills Pond #1 South	21169.19	Woodmen Hills Dr.
Woodmen Hills Pond #2	19810.83	McClure Rd.
Woodmen Hills Pond #3	18205.02	Eastonville Rd.
ET 19	18092.76	Eastonville Rd.
Woodmen Hills Pond #4	14543.949	West of Rail Road
ET 15	14364.16	Rail Road
ET 14	14215.6	Hwy. 24
ET 13	12425.19	Pinto Pony Rd.
ET 11	8304.048	Falcon Hwy.
ET 10	6243.929	N. Condor Rd.
ET 9	5333.859	Sunset Trl.
ET 4	2073.649	Garrett Rd.

Table 4-6. East Tributary 100-yr Velocity & Shear Stress Summary

Parameter	Existing Conditions		Future Conditions	
	Minimum	Maximum	Minimum	Maximum
Velocity (ft/s)	0.25	9.9	0.33	10
Shear Stress (lb/ft ²)	0.01	8.8	0.01	9.5

4.2.4. Manning's n Values

Manning's n values were calculated and assigned using the same procedure outlined in Section 3.0. Different Manning's n values were applied across the channel cross-section to reflect changes in vegetative cover between the main channel and overbank areas. The Manning's n values for the channels and floodplains are summarized in Table 4-7.

Table 4-7 Manning's n Values

Tributary	Manning's n Value	
	Channel	Overbank
West	0.03-0.07	0.08-0.15
Middle	0.05-0.07	0.08-0.15
East	0.03-0.07	0.08-0.15

The selected Manning's n values for the channels and the floodplains were based on the following:

- Guide for Selecting Manning's Roughness Coefficients for Natural Channels and Floodplains by the USGS (WSP 2339). This manual allows the Manning's n value to be adjusted for surface irregularities, variation in cross-sections, obstructions, vegetation, and meandering.

- SCS Guide for Selecting Roughness Coefficient “n” Values For Channels. This manual uses visual examples of what specific n values look like along with the corresponding slopes, soils, and vegetation.
- Cottonwood Creek DBPS (Matrix 2010)
- City of Colorado Springs & El Paso County DCM
- Urban Drainage and Flood Control District (UDFCD) Drainage Criteria Manual
- Colorado Department of Transportation (CDOT) Drainage Design Manual

4.2.5. Cross-sections

Cross-sections were initially placed approximately 400-ft apart and additional cross-sections were added to represent confluences, drainageway crossings, changes in channel form, and changes in channel slope. Cross-sections were automatically stationed from downstream to upstream along tributary. Each cross-section was adjusted to extend across the estimated floodplain and was placed perpendicular to the anticipated direction of flow in both the main channel and left/right floodplains. The cross-sections were bent in some locations to meet this requirement as described in Chapter 3 of HEC-RAS Hydraulic Reference Manual (Version 4.1, January 2010).

Additional cross-sections were added at the major drainageway crossings. At each of these locations, four cross-sections were added to the HEC-RAS model that included an upstream cross-section prior to flow contraction, a cross-section at the upstream face of the structure, a cross-section at the downstream face of the structure, and a downstream cross-section where flow is fully expanded. All bridge and culvert crossings were field surveyed to determine their size, inverts, and material.

The cross sections generated from the surface TIN by HEC-GeoRAS generally represent the top of the vegetated surface. In locations where vegetation is sparse, and not deep, the channel invert is accurately represented. In locations of dense and deep vegetative cover the channel invert was not accurately represented and was much shallower than what actually exists. This condition results in cross sections with less flood capacity than actually exists and leads to a conservative estimation of floodplain widths.

Several non-critical model warnings were generated for each tributary during model runs. To address model warnings by either defining numerous additional cross sections or by interpolating cross sections between every defined cross section would be necessary. Neither of these solutions is practical given the level of detail required for this study and as such were not completed.

Expansion and contraction coefficients in the cross-sections were estimated based on the ratio of expansion and contraction of the effective flow area in the floodplain occurring at cross-sections and at roadway crossings. For subcritical flow conditions where the change in the stream cross-section was gradual, a contraction coefficient of 0.1 and expansion coefficient of 0.3 were used. Wherever the change in effective cross section area was abrupt, such as at bridges and culverts, a contraction coefficient of 0.3 and expansion coefficient of 0.5 were used.

4.2.6. Ineffective Flow

Ineffective flow areas are used to describe portions of a cross section in which water does not actively flow. Ineffective flow is typically used at the upstream and downstream bounding cross sections of a drainageway crossing and for a side channel with stagnant storage. All ineffective flow is considered permanent and will not become effective flow until the barrier is overtopped.

4.2.7. Bridges and Culverts

The information from the hydraulic structure inventory was combined with the surface TIN to develop the bounding cross sections upstream and downstream of each major drainageway crossing. The cross sections generated from the TIN by HEC-GeoRAS were used as a starting point and were amended where appropriate to match the measured invert of each crossing. Only the cross section points in the immediate vicinity of the drainageway crossing were lowered in the event that invert of the cross section developed by HEC-GeoRAS was above the measured invert of the drainageway crossing. This scenario occurred primarily in areas of dense vegetation in the vicinity of a drainageway crossing. In some instances the invert of the cross sections were below the measured drainageway crossing invert. In these instances, the cross section inverts were modified on a case-by-case basis based on field observation.

The required inputs for bridge modeling include data for the deck/roadway, pier, and sloping abutments. The required inputs for culvert modeling include data for the deck/roadway, culvert shape, culvert size, and culvert material. This data was obtained from the hydraulic structure inventory, topography, and aerial photography.

Entrance loss coefficients were used to estimate the amount of energy lost as the flow enters a culvert and is used to determine the upstream headwater elevation for outlet control computations. Entrance loss coefficients for different types of culverts were selected from Table 6.3 of HEC-RAS Hydraulic Reference Manual (Version 4.1, January 2010). Exit losses were set to 1.0 for cases where sudden expansion occurs such as at a typical culvert outlet.

Special Cases

In some cases, either a steep slope entrance condition or adverse slope exit condition were created in the channel profile by modifying the bounding cross sections of the drainageway crossings. In these cases, the inverts of next upstream or downstream cross sections were adjusted to match the relative elevation change along the channel profile, reflected on the topography, in order to prevent an artificially improved or reduced hydraulic conveyance condition near a drainageway crossing.

There are two culvert entrances (MT 6 and MT 6-2) on the north side of Woodmen Road along Middle Tributary. These culverts are entrances to two separate storm sewers that eventually connect underground and discharge into Regional Pond MN. HEC-RAS does not have the capability to model a storm sewer and was only used to calculate the headwater elevation at Woodmen Road and not a flood profile between Woodmen Road and Regional Pond MN. It is assumed that these culverts are inlet controlled and that there is no tailwater condition that could exist in Regional Pond MN that would impact that headwater condition at Woodmen Road since the maximum water surface in Regional Pond MN is approximately 18 feet below the invert elevation of MT 6 and MT 6-2. There is only one outlet into Regional Pond MN which was assigned to MT 6. HEC-RAS requires an outlet for each entrance so an artificial outfall was defined for MT 6-2 in order for HEC-RAS to calculate the headwater at Woodmen Road.

4.2.8. Detention Pond Outlet Works

On-line detention pond structures were included in the HEC-RAS model if the outlet structure of the pond consisted of a basic outlet works consisting of a culvert and embankment. In the event that the outlet works of the detention pond was more complex, a rating curve based on the stage-storage-discharge relationship developed in Section 3.0, was input into the cross section upstream of the detention pond outlet works for modeling in HEC-RAS. The detention pond outlet works were not included in the pond hydraulic deficiency analysis; however, a potential deficiency was identified in

the event that a spillway was overtopped as shown on Figure 4-38 and Figure 4-39. The operational function of the pond outlet works was further examined in the alternatives analysis.

4.2.9. Steady Flow and Boundary Conditions

Steady flow data were entered for all reaches based on the results of the hydrologic modeling in Section 3.0. Steady flow data corresponding to the peak flow for flood events with recurrence intervals of 2-, 5-, 10-, 25-, 50- and 100-years for existing and future hydrologic conditions was entered for each reach at points of significant hydrologic change as determined in the hydrologic model. A summary of hydrologic flows for each tributary at different points is provided in tabular form in Appendix B.

The boundary condition for the West Tributary was based on the normal depth in the downstream reach of this tributary. The boundary condition for the Middle Tributary was based on the 100-yr water surface elevation in the West Tributary, at the location of this confluence, which is higher than the normal depth in Middle Tributary at this location. The boundary condition for the East Tributary was based on the normal depth in the downstream reach of this tributary which resulted in a higher water surface elevation than using the 100-yr water surface elevation in the West Tributary at the location of this confluence. Only the downstream boundary conditions were required because the more conservative subcritical flow condition was evaluated.

4.2.10. Approximate Floodplains

After the HEC-RAS model analysis was complete, the 100-year water surface elevations were exported back to HEC-GeoRAS for refinement. Approximate floodplains for the existing and future 100-year floods were delineated for all of the tributaries listed above and are shown in Sheet 4-1 through Sheet 4-37. The FEMA floodplains for the Falcon Watershed are overlaid in these figures for comparison to the results of this analysis. Flood profiles for the existing and future 100-year floods are shown in Appendix B. The approximate floodplains and profiles were used to assess where potential drainageway crossing deficiencies exist along the major drainageways and identify areas of potential flooding.

The approximate floodplain information shown on the figures above is intended primarily for the identification of flood prone areas along the tributaries and to aid in the evaluation of potential alternatives. The approximate floodplain data contained herein is not intended to replace the information presented in the City of Colorado Springs and El Paso County Flood Insurance studies (FEMA 1999) but should be used as a planning tool for drainageway development projects. The FEMA floodplain remains as the regulatory floodplain.

Limitations

3. There are locations along each tributary where the cross section does not fully contain the 100-yr flood. The cross sections at these locations were extended; however, some cross sections still do not fully contain the 100-yr flood. HEC-RAS calculates the 100-yr Water Surface Elevation (WSE) for this condition by assuming that a vertical wall exists at the boundary of the cross section. The 100-yr floodplain was delineated at these locations by projecting the calculated depth at the edge of the cross section to the intersecting contour on the topography.
4. As described above, the channel invert was not accurately represented in locations of dense and deep vegetative cover and was much shallower than what actually exists. This condition results in cross sections with less flood capacity than actually exists and leads to a conservative estimation of floodplain widths. This same issue caused difficulties modeling structure crossings.

5. There are numerous locations along each of the three tributaries where split flow occurs and diverges from the primary flowpath. A detailed split flow model is required in order to correctly map the floodplain for the primary and secondary flowpaths and identify what percentage of flow exists within each flowpath. The 100-yr floodplain for all of these locations was mapped based on the maximum extents of the water surface that HEC-RAS calculated at each cross section.

Locations where split flow occurs and appears to leave the watershed are:

- a. West Tributary at all of the diversion berms south of Stapleton Drive
 - b. Middle Tributary at the depression south of Woodmen Hills Drive
 - c. Middle Tributary at the depression south of Salinas Road
 - d. East Tributary at Eastonville Road
 - e. East Tributary at Falcon Hwy.
 - f. East Tributary north of Garret Road and Blaney Road (quantified below due to severity)
6. The East Tributary overtops Blaney Road approximately 1,600 feet north of Garrett Road. Downstream of this location only a portion of the incoming flow remains in the East Tributary while the remainder of the flow overtops Blaney Road and enters a secondary channel. The amount of flow that overtops Blaney Road was estimated by using a lateral weir in HEC-RAS. The approximate floodplain in the secondary channel was delineated based on the results of three normal depth calculations at the beginning, middle, and end of the channel with the overtopping flow. The floodplain in the East Tributary downstream of this location was delineated using HEC-RAS with the remainder of flow that does not overtop Blaney Road. A summary of the split flow quantities at this location is provided in Table 4-8.

Table 4-8 East Tributary Split Flow at Blaney Road

Existing 100-yr Inflow (cfs)	East Tributary 100-yr Flow (cfs)	Secondary Channel 100-yr flow (cfs)
620	310	320
Future 100-yr Inflow (cfs)	East Tributary 100-yr Flow (cfs)	Secondary Channel 100-yr flow (cfs)
710	330	380

Flow will likely overtop Blaney Road again downstream of this location, however, it was assumed to only overtop at this location for the purposes of this study. The floodplains delineated for East Tributary and the secondary channel downstream of this location are approximate and should be used accordingly. A more detailed and thorough analysis is required at this location to determine the exact extents of the floodplain.

4.3. Storm Sewer Modeling

Storm sewer data was obtained from the County’s GIS data set which provided pipe sizes, approximate horizontal layout, and material. Storm sewer slopes were estimated from the 2-ft contours of the ground surface. The Bentley FlowMaster software was used to perform full flow, unpressurized, capacity calculations for all of the main lines of each storm sewer system. Full flow capacity calculations provide a quick method to estimate capacity and screen systems that may have a capacity problem. Additional street capacity was accounted for in situations where flow in excess of the storm sewer could be conveyed down a street in the same direction as the reach while meeting County criteria. Storm sewer capacities were

compared to the existing and future hydrology results in Section 3.0 in order to identify potential deficiencies. Each of the storm systems is entirely contained within one of the subbasins of the Falcon Watershed. Proportioned flows were calculated by estimating the approximate drainage area from each subbasin to each of the storm systems and applying that ratio to the calculated peak flow for the subbasin. This method was used in order to avoid artificially identifying a deficiency by using a peak flow that was greater than what will be captured by an individual storm system. Results of this analysis are provided in Appendix B.

4.4. Deficiencies

Deficiencies were broken into four categories:

1. Potential detention pond deficiencies
2. Drainageway crossing deficiencies
3. Storm sewer deficiencies
4. Areas of geomorphic instability

All existing deficiencies also exist in the future hydrologic condition; however, most of these are at a higher level of deficiency due to the increase in flow. Figure 4-38 and Figure 4-39 show areas of deficiency throughout the Falcon Watershed for both existing and future conditions. All deficiencies were evaluated and quantified at a planning level. A detailed design is recommended prior to addressing any deficiency.

4.4.1. Potential Detention Pond Deficiencies

Detention ponds were determined to be potentially deficient if the spillway was overtopped. The 100-yr WSE within each detention pond was calculated using HEC-HMS using the stage-storage-discharge curves developed in Section 3.0 and compared with the 100-yr flood profile calculated by HEC-RAS through each detention pond. The results of the 100-yr WSE varied in some cases because of the way each of the programs calculates the water surface within a detention pond system and because of the limitations described in Sections 4.2.5 and 4.2.7. HEC-HMS calculates the water surface based on detention pond routing equations using with unsteady flow. HEC-RAS calculates the water surface based on culvert hydraulics and steady flow. Detention ponds were determined to be potentially deficient if either program calculated a 100-yr WSE above the spillway elevation. Results of this analysis are provided in Table 4-9 and Table 4-10.

4.4.2. Drainageway Crossing Deficiencies

The drainageway crossing deficiency analysis was performed for all major drainageway structures that the County is responsible for maintaining on the main stem of each of the three tributaries. Crossings were determined to be deficient using the criteria published in the DCM for culverts and bridges and the results of the HEC-RAS model. Results of this analysis are provided in Table 4-11.

4.4.3. Storm Sewer Deficiencies

The storm sewer deficiency analysis was performed for all of the main lines of each storm sewer system. Storm sewers were determined to be deficient if the calculated flow from the hydrologic model was greater than the total system capacity. Total system capacity includes storm sewer capacity and street conveyance capacity. Results of this analysis are provided in Table 4-12. Note that only storm sewers with a priority of 1 and 2 are shown in Table 4-12. The complete analysis is provided in Appendix B.

The purpose of the storm sewer deficiencies screening was to identify potential deficiencies at a planning level. The hydrologic results calculated in this DBPS are not resolute enough for detailed hydraulic evaluation of storm systems. As a result, a detailed study is recommended to determine the magnitude of the storm sewer deficiencies that were identified and to determine the appropriate plan of action.

4.4.4. Areas of Geomorphic Instability

Areas of geomorphic instability along each of the three tributaries were identified during field work and review of aerial photography. These areas were identified based on observation and are not all inclusive due to access constraints. Two types of geomorphic instability exist within the Falcon Watershed: erosional areas and depositional areas. Erosional areas are reaches where the channel has downcut and become incised. This process generates an excessive sediment load which is transported downstream and increases lateral migration which results in unstable channel banks. Depositional areas are typically found downstream of an erosional area where the excessive sediment that was generated is dispersed across the channel and floodplain. This process reduces the flood capacity within the channel, clogs drainageway crossings, and increases the risk that flood flows will overtop roadways. All observed locations of geomorphic instability are shown on Figure 4-38. These locations are also provided on Figure 4-39 for reference only as they are reflective only of existing conditions.

Table 4-9. Existing Potential Detention Pond Deficiencies

Detention Pond	Tributary	Spillway Elev. (ft)	HEC-RAS 100-yr WSE (ft)	HEC-HMS 100-yr WSE (ft)
Paint Brush Hills Pond A	West (offline)	7,148	N/A	7,149
Woodmen Hills Pond H	Middle (offline)	6976	N/A	6,977
Regional Pond MN	Middle	6,854	6,853	6,855
Paint Brush Hills Pond #4	East	7,134	7,136	7,135
Woodmen Hills Pond #1 South	East	6,954	6,947	6,956
Woodmen Hills Pond #2	East	6,930	6,926	6,932
Woodmen Hills Pond #3	East	6,902	6,903	6,903
Woodmen Hills Pond #4	East	6,860	6,857	6,861

Notes:

¹ Offline ponds were not modeled with HEC-RAS

Table 4-11. Drainageway Crossing Deficiencies

Crossing Name	Priority ¹	Tributary	100-yr Flow (cfs)		Location	Size ²	Existing Deficiency ³	Future Deficiency ³
			Existing	Future				
WT 14	1	West	89	89	Burgess Rd.	18" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
WT 13	1	West	170	170	Pine Park Trl.	30" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
WT 11	1	West	480	480	Arroya Ln.	12" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
Pond WU Inlet Structure	1	West	1,017	1,398	Tamlin Rd.	(3) 18" RCP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
WT 6	1	West	910	1,100	Falcon Hwy.	(2) 5.58' x 8.25' Arch CMP	Overtops	Overtops
WT 5	1	West	910	1,100	Meridian Rd.	24" CMP	Overtops	Overtops
WT 5-2	1	West	910	1,100	Meridian Rd.	18" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
WT 4	1	West	1,300	1,700	W. Condor Rd.	48" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Freeboard Criteria
WT 1	1	West	1,900	2,406	Blaney Rd.	(2) 36" RCP	Overtops, Does Not Meet Freeboard Criteria	Overtops, Does Not Meet Freeboard Criteria
MT 7	1	Middle	259	360	Owl Ln.	1.75' x 1.25' Elliptical CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
MT 6	1	Middle	760	1,200	Woodmen Rd.	(3) 48" RCP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
MT 6-2	1	Middle	760	1,200	Woodmen Rd.	(3) 48" RCP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
MT 1	1	Middle	820	1,200	Falcon Hwy.	24" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 31	1	East	280	390	Stapleton Dr.	(2) 6' x 2.5' RCBC	Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 26	1	East	460	580	Rio Secco Ln.	(3) 48" RCP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 13	1	East	380	390	Pinto Pony Rd.	(2) 48" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 11	1	East	430	450	Falcon Hwy.	(2) 60" RCP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 10	1	East	590	680	N. Condor Rd.	4.67' x 3.17' Arch CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 9	1	East	590	680	Sunset Trl.	48" CMP	Overtops, Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
ET 4	1	East	309	325	Garrett Rd.	4.67' x 3.17' Arch CMP	Does Not Meet Hw/D Criteria	Overtops, Does Not Meet Hw/D Criteria
WT 10	2	West	950	1,100	Woodmen Road	8.75' x 18.92' RCBC	None	Does Not Meet Hw/D Criteria
WT 9	2	West	1,000	1,400	Meridian Rd.	(4) 10' x 6' RCBC	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
WT 7-2	2	West	890	1,100	Rail Road	54' Wood Bridge	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
WT 7-1	2	West	890	1,100	Hwy. 24	(3) 12' x 6' RCBC	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
WT 3	2	West	1,300	1,700	Garrett Rd.	(2) 12' x 7.33' Arch CMP	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
MT 5-1	2	Middle	770	1,200	McLaughlin Rd.	27' Steel Bridge	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
MT 4	2	Middle	800	1,200	Rail Road	77' Wood Bridge	None	Does Not Meet Freeboard Criteria
MT 3	2	Middle	800	1,200	Hwy. 24	(2) 12' x 6' RCBC	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
MT 2	2	Middle	820	1,200	Swingline Rd.	20' x 6.83' RCBC	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria
ET 32	2	East	150	200	Liberty Grove Dr.	(2) 42" CMP	Does Not Meet Hw/D Criteria	Does Not Meet Hw/D Criteria
ET 30	2	East	460	580	Royal County Down Rd.	72" RCP	Does Not Meet Hw/D Criteria	Does Not Meet Hw/D Criteria
ET 19	2	East	733	733	Eastonville Rd.	72" CMP	Does Not Meet Hw/D Criteria	Does Not Meet Hw/D Criteria
ET 14	2	East	370	390	Hwy. 24	(2) 12' x 4.83' RCBC	Does Not Meet Freeboard Criteria	Does Not Meet Freeboard Criteria

Notes:

1) Priority 1 = Overtopping, Priority 2 = Does Not Meet Hw/D Criteria or Freeboard Criteria

2) Based on field measurements

3) Per DCM page 6-10

5.0 ALTERNATIVES ANALYSIS

5.1. Introduction

The purpose of the alternatives analysis was to synthesize all of the information gathered and analyzed thus far in this DBPS and evaluate several detention and reach alternatives for the Falcon Watershed. In addition to the previous hydrologic and hydraulic analyses, one public meeting and several project team meetings were conducted to gather input for the alternatives analysis. The outcome of this section is a recommended detention alternative and a reach alternative prioritization to be carried forward to the plan development design phase for further analysis. All backup calculations and data are provided in Appendix C.

5.2. Planning Reach Delineation

Open Channel Reaches

Planning reaches within the Falcon Watershed were delineated based on the environmental factors discussed in Section 2.0, the projected future flows in Section 3.0, and the hydraulic evaluation and deficiency analysis in Section 4.0. All of the open-channel reaches identified through these analyses were evaluated for alternatives as a part of this DBPS.

Storm Systems

The potential storm sewer deficiencies that were identified in Section 4.0 will not be evaluated for alternatives as a part of this DBPS. The hydrologic results calculated in this DBPS are not resolute enough for detailed hydraulic evaluation of storm systems. Therefore, it is recommended that a detailed study be completed for all storm systems that were identified to be potentially deficient.

Spillway Overtopping & Drainageway Crossing Deficiencies

The deficiencies analysis completed in Section 4.0 shows that 13 of the 16 existing detention pond spillways are overtopped and that 33 of the 34 drainageway crossings are deficient. The deficiencies for drainageway crossings range from roadway overtopping to inadequate headwater-to-depth ratios. The deficiencies analysis for both the spillways and drainageway crossings is reflective of future flows without any additional detention ponds or modifications to any of the existing detention ponds.

Deficiencies for existing detention pond spillways and drainageway crossings were not reexamined with the revised peak flows from the detention pond alternatives analysis. These deficiencies were revised and quantified during plan development design after the preferred detention alternative was selected. In general, as peak flows are reduced due to increased detention, spillway and drainageway crossing deficiencies will decrease.

5.3. Evaluation of Detention Alternatives

The two primary issues within the Falcon Watershed are areas of channel instability and flooding. Channel instability consists of both erosion and deposition and is primarily a result of increased channel-forming flows being released into the tributaries, when compared to historical conditions. The channel-forming flow is the discharge that shapes the channel through erosion and sedimentation and is typically associated with more frequently occurring, small storm events. Flooding, on the other hand, typically results from less frequently occurring, large storm events that cause inundation at drainageway crossings, along roads, and at individual properties. As a result, the goals of the detention alternatives for the Falcon Watershed are to:

1. Manage the channel-forming flows to historical conditions where possible
2. Manage the major flood flows to historical conditions where possible

The idea driving these goals is that if the hydrology within the watershed is appropriately managed:

- Many of the stable, relatively “pristine” reaches within the watershed can be preserved,
- Many of the currently impaired reaches within the watershed can be returned to a near pristine condition,
- Overall costs for required channel and infrastructure improvements will be much lower, and
- Flooding will be reduced.

The UDFCD recommends using full spectrum detention to mimic historic peak flows for the full range of storm events, such as the 2-, 5-, 10-, 25-, 50-, and 100-yr. In order to accomplish this, the UDFCD DCM, Vol. 2 recommends using a two-stage outlet structure that consists of the capture and slow release of the Excess Urban Runoff Volume (EURV) over 72 hours in combination with the 100-yr storage volume to effectively manage the full range of flood flows. The EURV approximately represents the difference between the pre-developed and post-developed 2-yr runoff volumes and includes the Water Quality Capture Volume (WQCV). Full spectrum detention provides water quality benefits by:

- Treating pollutant-laden stormwater runoff via settling and infiltration processes
- Managing the channel-forming flow to historical conditions, thereby limiting channel erosion
- Reducing runoff volume via infiltration

Three detention alternatives were evaluated using a combination of existing, planned, and potential detention ponds:

1. Do Nothing Alternative
2. Regional Detention Alternative
3. Sub Regional Detention Alternative

Full spectrum detention was implemented into existing, planned, and potential detention ponds where possible for both the regional and sub regional alternatives. Existing detention ponds are those currently in place and consist of on-site, sub regional, and regional detention ponds. Existing detention ponds can easily be retrofit to incorporate full spectrum detention by the use of low flow restrictor plates, additional grated inlets, additional culverts, and spillway modifications. Planned detention ponds are those ponds that have been designed in other studies, but have not been constructed or funded. Potential detention pond locations were recommended as a part of this DBPS and were sited on County-owned land where possible and only placed on private property if it was determined to be necessary. All potential ponds were placed on-line for the evaluation of these alternatives. On-line ponds shouldn't pose a risk for sediment in-fill in the Falcon Watershed because it is not a high sediment load watershed. Rough grading was performed at each potential location using:

- Approximate pond shape (i.e. triangle, square, elliptical, etc.)
- 4 horizontal to 1 vertical maximum grades

- 10-ft maximum water depth within the estimated pond grading due to jurisdictional dam limitations

The analysis of these three alternatives was developed using the future hydrology model developed in Section 3.0 as the base model. The stage-storage-discharge (SSD) curves developed for the existing detention ponds in Section 3.0 were used for all of the detention ponds in the Do Nothing Alternative. Each of the detention ponds modeled for the Regional and Sub Regional alternative was modeled using a simplified SSD curve with points to represent the pond bottom, EURV/WQCV, 100-yr volume, and spillway overtopping with the following criteria:

- EURV/WQCV
 - Storage and discharge requirements were calculated based on the guidelines outlined in the UDFCD DCM, Vol. 2
 - EURV drain time of 72 hours
 - WQCV drain time of 40 hours
- 100-yr Volume
 - Storage was initially estimated based on the difference between the pre-development and post-development 100-yr hydrographs
 - 100-yr storage was limited to the spillway elevation of the pond
 - 100-yr storage was limited to a 10-ft maximum water depth within the estimated pond grading of proposed ponds due to jurisdictional dam limitations
 - Release rates were greater than historic in some cases due to storage limitations
- Spillway Overtopping
 - Stage and storage calculated at 2 ft above the spillway elevation
 - Release rates were set as the sum of the inflow hydrograph plus the target 100-yr discharge

5.3.1. Do Nothing Alternative

This alternative utilizes all of the existing detention ponds shown in Figure 5-1 without retrofit for full spectrum detention and would require that channel improvements for all of the tributaries be designed for the future peak flows calculated in Section 3.0. This alternative would not provide any additional flood flow attenuation for managing channel-forming flows or flood flows and would put the watershed at risk for continued erosion, deposition, and flooding.

5.3.2. Regional Detention Alternative

This alternative recommends adding 1 additional detention pond at the confluence of each of the major tributaries for a total of 2 new detention ponds as shown on Figure 5-2. Full spectrum detention was incorporated into all existing and proposed detention ponds where applicable for this alternative. However, in some cases different detention configurations were used due to pond volume limitations. The other types of detention pond configurations that were used consist of:

- 100-yr control only – Used in ponds where there was minimal head differential between the EURV or WQCV stage and the 100-yr stage. Recommending a 100-yr control above the

EURV/WQCV with minimal head differential may result in an outlet structure configuration that is not feasible to pass the 100-yr flow.

- EURV storage – Used in ponds where available storage volume was limited and the additional volume for the 100-yr flood could not be contained.
- WQCV storage in combination with 100-yr storage - Used in ponds where there was minimal head differential between the EURV stage and the 100-yr stage. The WQCV requires less storage volume and still provides attenuation for the channel forming flows. This combination of control allows for a more feasible outlet structure configuration because it provides more head differential between the WQCV stage and 100-yr stage.

A list of all detention ponds, and the type of outlet control used in each, is provided in Table 5-1.

Table 5-1. Regional Detention Alternative

Detention Pond	Tributary	Outlet Stages	Type of Outlet Control
Paint Brush Hills Pond C	West Tributary	EURV + 100-yr	Full Spectrum
Paint Brush Hills Pond A	West Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Paint Brush Hills Pond B1	West Tributary	No Modification	N/A
Paint Brush Hills Pond B2	West Tributary	EURV + 100-yr	Full Spectrum
The Meadows Pond #1	West Tributary	EURV + 100-yr	Full Spectrum
Regional Pond WU	West Tributary	EURV + 100-yr	Full Spectrum
Regional Pond R1	West Tributary	EURV + 100-yr	Full Spectrum
Proposed Regional Pond R2	West Tributary	EURV Only	~2-yr
Woodmen Hills Pond H	Middle Tributary	No Modification	N/A
The Meadows Pond #2	Middle Tributary	EURV + 100-yr	Full Spectrum
Regional pond MN	Middle Tributary	100-yr Only	100-yr
Woodmen Hills Pond #5	Middle Tributary	EURV + 100-yr	Full Spectrum
Paint Brush Hills Pond #4	East Tributary	No Modification	N/A
Woodmen Hills Pond #1 North	East Tributary	EURV + 100-yr	Full Spectrum
Woodmen Hills Pond #1 South	East Tributary	EURV + 100-yr	Full Spectrum
Woodmen Hills Pond #2	East Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Woodmen Hills Pond #3	East Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Woodmen Hills Pond #4	East Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr

Both Woodmen Hills Pond H and Paint Brush Hills Pond #4 are grossly undersized and both of the spillways currently overtop during the 100-yr storm. As a result, no retrofit solution was provided for these ponds. It is recommended that on-site detention be incorporated upstream of these ponds to reduce flooding at these locations. The drainage area that needs to be mitigated by an EURV or WQCV at these pond locations was accounted for in downstream detention ponds. A detailed analysis and summary for all of the detention ponds in this alternative is provided in Appendix C.

5.3.3. Sub Regional Detention Alternative

This alternative recommends adding 7 additional ponds at points of major hydrologic change along each of the major tributaries as shown on Figure 5-3. Full spectrum detention was incorporated into all existing and proposed detention ponds where applicable for this alternative. However, in

some cases other controls were used due to pond volume limitations. A list of all detention ponds, and the type of outlet control used in each, is provided in Table 5-2.

Table 5-2. Sub Regional Detention Alternative

Detention Pond	Tributary	Outlet Stages	Type of Outlet Control
Proposed Sub Regional Pond SR1	West Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Paint Brush Hills Pond C	West Tributary	EURV + 100-yr	Full Spectrum
Paint Brush Hills Pond A	West Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Paint Brush Hills Pond B1	West Tributary	No Modification	N/A
Paint Brush Hills Pond B2	West Tributary	EURV + 100-yr	Full Spectrum
Proposed Sub Regional Pond SR2	West Tributary	EURV Only	~2-yr
The Meadows Pond #1	West Tributary	EURV + 100-yr	Full Spectrum
Proposed Sub Regional Pond SR3	West Tributary	EURV Only	~2-yr
Regional Pond WU	West Tributary	EURV + 100-yr	Full Spectrum
Proposed Regional Pond R1	West Tributary	EURV + 100-yr	Full Spectrum
Proposed Regional Pond R2	West Tributary	EURV Only	~2-yr
Woodmen Hills Pond H	Middle Tributary	No Modification	N/A
The Meadows Pond #2	Middle Tributary	EURV + 100-yr	Full Spectrum
Proposed Sub Regional Pond SR4	Middle Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Regional pond MN	Middle Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Woodmen Hills Pond #5	Middle Tributary	EURV + 100-yr	Full Spectrum
Paint Brush Hills Pond #4	East Tributary	No Modification	N/A
Proposed Sub Regional Pond SR6 (previously planned location)	East Tributary	EURV + 100-yr	Full Spectrum
Woodmen Hills Pond #1 North	East Tributary	EURV + 100-yr	Full Spectrum
Woodmen Hills Pond #1 South	East Tributary	EURV Only	~2-yr
Woodmen Hills Pond #2	East Tributary	EURV + 100-yr	Full Spectrum
Woodmen Hills Pond #3	East Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr
Woodmen Hills Pond #4	East Tributary	WQCV + 100-yr	Low Flow (<2-yr) + 100-yr

Both Woodmen Hills Pond H and Paint Brush Hills Pond #4 are grossly undersized and both of the spillways currently overtop during the 100-yr storm. As a result, no retrofit solution was provided for these ponds. It is recommended that on-site detention be incorporated upstream of these ponds to reduce flooding at these locations. The drainage area that needs to be mitigated by an EURV or WQCV at these pond locations was accounted for in downstream detention ponds. A detailed analysis and summary for all of the detention ponds in this alternative is provided in Appendix C.

5.3.4. Hydrologic Results

The hydrologic results for each of the detention alternatives at key locations throughout the Falcon Watershed are shown in Table 5-3. These results reflect all 16 existing, 1 planned, and all potential detention ponds as shown on Figure 5-1 through Figure 5-3. Note that in some cases the reported peak flows for the Regional Detention and Sub Regional Detention alternatives is higher than the Do Nothing alternative. This is because the configuration of the outlet structures for existing detention ponds had to be modified for these alternatives in order to meet the EURV/WQCV discharge rates. This resulted in having to increase the discharge rates for larger floods to meet the storage constraints

within the existing detention ponds. In general, the Sub Regional Detention Alternative reduces peak flows the most throughout the Falcon Watershed. A summary of peak flows at the location of each detention pond is provided on Figure 5-2 and Figure 5-3.

Table 5-3. Peak Flows at Points of Interest within the Falcon Watershed for Detention Alternatives

Location	HEC-HMS Element ²	2-year Peak Flow (cfs) ³				100-year Peak Flow (cfs) ³			
		Historical	Do Nothing	Regional Detention	Sub Regional Detention	Historical	Do Nothing	Regional Detention	Sub Regional Detention
West Tributary									
Raygor Rd.	JWT030	6	9	9	9	75	85	85	85
Stapleton Rd.	JWT120	58	85	73	55	750	920	950	710
Woodmen Rd.	JWT210	80	120	97	81	1,000	1,300	1,300	1,000
Hwy. 24	JWT250	84	85	65	64	1,100	1,100	1,200	980
Falcon Hwy.	JWT260	86	86	70	70	1,100	1,100	1,200	1,000
Garrett Rd.	JWT320	110	160	82	80	1,500	1,700	1,700	1,500
East Blaney Rd.	JWT354	110	230	140	140	1,700	2,500	2,400	2,100
Upstream of Bennett Ranch Tributary ¹	JWT374_Outlet	110	230	140	140	1,700	2,500	2,400	2,100
Middle Tributary									
Woodmen Hills Dr.	JMT010	1	1	5	5	57	160	99	99
Woodmen Rd.	JMT070	24	150	150	31	350	1,200	1,200	840
Hwy. 24	JMT106	24	92	140	33	360	1,200	1,100	840
Falcon Hwy.	JMT110	22	94	140	34	360	1,200	1,100	860
Confluence with West Tributary	RMT114	22	94	140	34	360	1,200	1,100	860
East Tributary									
Stapleton Dr.	JET020	20	74	74	9	200	390	390	200
Woodmen Hills Dr.	JET040	19	27	14	10	240	570	620	260
Eastonville Rd.	JET060	19	13	14	13	260	430	510	360
Hwy. 24	JET090	17	26	30	30	260	390	410	300
Pinto Pony Rd.	JET100	17	27	32	32	260	390	410	300
Falcon Hwy.	JET120	17	49	50	50	270	450	470	400
Garrett Rd.	JET160	18	66	67	67	300	710	720	640
Confluence with West Tributary	RET164	18	66	66	66	300	710	720	630

Notes:

¹ Falcon Watershed Outlet

² Reference Figure 3-12 and 3-13

³ Results shown for Do Nothing, Regional Detention, and Sub Regional Detention reflect fully developed conditions

5.3.5. Detention Alternative Comparison

All three of the detention alternatives were compared against each other using the evaluation parameters listed in Table 5-4 in order to determine which detention alternative provides the most benefit to the watershed. Scores range from 1 to 3, where a score of 1 represents the best alternative for any given evaluation parameter and a score of 3 represents the worst alternative for any given evaluation parameter. The scoring system is intended to be relative so that each detention alternative is compared against the other alternatives for each of the evaluation parameters. The lowest total score represents the best alternative.

Table 5-4. Detention Pond Alternative Scoring Matrix

Evaluation Parameter	Do Nothing	Regional Detention	Sub Regional Detention
Detention Pond Construction Cost	1	2	3
Reach Construction Cost	3	2	1
Detention Pond O&M Costs	1	2	3
Reach O&M Costs	3	2	1
Flood Damage Reduction	2	3	1
Channel Stability (Near-Term)	3	2	1
Channel Stability (Long-Term)	3	2	1
Impact Upon Known Environmental Resources	1	2	3
Impact Upon Existing Utilities	1	1	1
Impact Upon Future Utilities	1	1	1
Impact Upon Existing Thoroughfares	1	1	1
Impact Upon Future Thoroughfares	1	1	1
ROW & Property Acquisition	1	2	3
Regulatory Issues	1	1	1
Trails & Open Space	1	2	2
Stormwater Quality	3	2	1
2-yr Flood Control	3	2	1
100-yr Flood Control	2	3	1
Flexibility for Development	1	1	1
Lot Premium	3	2	1
Habitat Improvements	3	2	1
Total	39	38	30

5.3.6. Woodmen Hills Detention Pond #4

Woodmen Hills Detention Pond #4 is currently not operating correctly which has resulted in severe and extensive erosion and numerous locations of flooding downstream of Highway 24. This pond was restudied by Wilson & Company in 2011. The release rates for the restudy of Woodmen Hills Pond #4 published in the report titled “*Pond 4 of the Falcon Area Stormwater Assessment*” (Pond 4 Assessment) (Wilson & Co. 2011) compare well with what was calculated in the Sub Regional Detention Alternative for this DBPS and are shown in Table 5-5. Further, Matrix determined release

rates for Pond #4 based on using the more recent inflow hydrograph from this DBPS (discussed below) and the proposed Wilson & Co. SSD curve for comparison.

Table 5-5. Release Rates from Woodmen Hills Detention Pond #4

Source	2-yr Release Rate (cfs)	100-yr Release Rate (cfs)
Pond 4 Assessment (Wilson & Co. 2011)	11	278
Matrix DBPS model	15	260
Matrix DBPS model w/Wilson & Co. SSD curve	10	288

The Pond 4 Assessment identifies Woodmen Hills Pond #1 and Woodmen Hills Pond #2 as being deficient because both of the spillways are overtopped. The redesign of Woodmen Hills Detention Pond #4 assumes that the outlet structures for both of these ponds will be improved so that flows do not overtop the spillway. The Pond 4 Assessment also assumes that the future pond in the northwest corner of Meridian Road and Stapleton Drive will be constructed.

This DBPS shows that the spillways for Woodmen Hills Pond #1 and Woodmen Hills Pond #2 are overtopped. However, it also shows that the spillway for Woodmen Hills Detention Pond #3 is overtopped. This DBPS did not evaluate a future detention pond in the northwest corner of Meridian Road and Stapleton Drive for the Regional Detention Alternative, but did for the Sub Regional Detention Alternative. The Sub Regional Detention Alternative provides solutions to address spillway overtopping for Woodmen Hills Ponds #1, #2, and #3 and provides a potential configuration for the future detention pond in the northwest corner of Meridian Road and Stapleton Drive. As a result, the inflow hydrograph from this DBPS is likely to be different than what was used in the Pond 4 Assessment.

Recommendations

1. It is recommended that the County use the more recent hydrographs developed for the final version of this DBPS for the redesign of Woodmen Hills Detention Pond #4.
2. It is recommended that the County reevaluate the SSD curve based on the outlet configuration proposed in the final redesign for Woodmen Hills Detention Pond #4 in order to evaluate impacts downstream of this pond.
3. It is recommended that the County include drain time constraints for low flows (< 2-yr) over a 40- to 72-hr period as outlined in the UDFCD DCM. Low flow attenuation was discussed in the Pond 4 Assessment, but drain time was not evaluated.

5.3.7. Detention Alternative Conceptual Cost Estimate

Conceptual cost estimates were developed for each of the three detention pond alternatives and are provided in Table 5-6. These cost estimates were developed for comparison purposes only and were refined during plan development design. The cost estimates were based on the following assumptions:

- Retrofit detention costs include the costs to retrofit existing outlet structures for EURV/WQCV control and 100-yr volume control. This cost assumes that the existing outlet structure can be retrofit by utilizing low flow restrictor plates, adding additional grated inlets, or adding additional culverts. Retrofit costs were assumed to be \$10,000/ea.

- Construction costs for potential detention ponds are based on \$24,500/ac-ft as documented in the Jimmy Camp Creek DBPS - FSD Costs Memo.
- Required pond volume is based on the pond volume up to the 100-yr WSE and does not include the embankment.
- Land requirements for potential ponds are based on a (land area/pond volume) ratio of 0.285 ac/ac-ft as documented in the Jimmy Camp Creek DBPS - FSD Costs Memorandum.
- 15% engineering and construction administration fee
- 20% contingency

Table 5-6. Detention Alternative Cost Summary

Detention Alternative	Detention Cost
No Detention	\$ 0
Regional Detention	\$ 7,700,000
Sub Regional Detention	\$ 10,800,000

The Sub Regional Detention Alternative is the best alternative when compared against the list of evaluation parameters and it provides the most flow reduction throughout the watershed. The preliminary analysis indicates that this alternative is the most expensive detention alternative. The impact on reach alternatives will be discussed later in this section to determine which detention alternative allows for the implementation of the preferred reach alternatives. Final costs are provided in Section 6.

5.4. Evaluation of Reach Alternatives

Alternatives for each of the planning reaches were evaluated using the peak flows calculated for each of the three different detention alternatives in Section 5.3. The result of this process was a recommended alternative for each planning reach that corresponds to the Do Nothing Detention Alternative, Regional Detention Alternative, and Sub Regional Detention Alternative. A total of five different reach alternatives were considered in the screening process and are described below.

5.4.1. Protect In Place

There are several relatively pristine reaches of channel throughout the Falcon Watershed that are currently in a stable condition. These reaches typically consist of a small low-flow channel that is connected to a very wide floodplain which allows for the effective conveyance of all flood flows by dissipating erosive energy over the entire floodplain area. These reaches also provide water quality benefit due to the amount of surface area available for infiltration and the filtering effect of vegetation. Additionally, there are several reaches throughout the Falcon Watershed that have already been improved and appear to be stable. Preserving both of these reach conditions would not require a direct channel improvement cost. However, upstream detention improvements may be required depending on the location of the reach. Reaches had to meet the following criteria in order to fall into this category:

- The reach had to be in a stable condition currently.
- The 2-yr flood flows within the reach had to be at or below historical conditions.

5.4.2. Natural Channel Design

The goal of this reach alternative is to restore the low-flow channel and connect it to the adjacent floodplain. This alternative allows for channel shear stress to be reduced by allowing flood flows to access the floodplain where erosive energy is dissipated over the entire floodplain area. This reach alternative can be used where mild longitudinal slopes exist and where floodplain shear stresses are within a range that vegetation can withstand. These reaches also provide water quality benefit due to the amount of surface area available for infiltration, the filtering effect of vegetation, and because they limit channel erosion. The target slope and channel section for this alternative would be maintained through grade control structures. An illustration of this alternative is shown in Figure 5-4. Reaches had to meet the following criteria in order to fall into this category:

- Existing slope of less than or equal to 0.015 ft/ft. This was based on the average slope in channel sections that are currently stable.
- Shear stress at the 2-yr flood stage of less than or equal to 1 lb/ft²
 - Based on the average shear stress in channel sections that are currently stable
 - Calculated using the 2-yr flood stage from Section 3.0 within the existing channel section

5.4.3. Small Drop Structures

This reach alternative involves hardening the lower portion of the side slopes of the channel cross-section while relying on smaller (< 3 ft) drop structures to maintain a target longitudinal slope. An illustration of this alternative is shown in Figure 5-5. Reaches had to meet the following criteria in order to fall into this category:

- A calculated spacing between drops greater than or equal to 100 ft (assuming 3-ft drops). A closer spacing between drop structures would result in too many structures in a reach.

5.4.4. Large Drop Structures

This reach alternative involves hardening the lower portion of the side slopes of the channel cross-section while relying on larger (6 ft > drop height > 3 ft) drop structures to maintain the stable longitudinal slope. An illustration of this alternative is shown in Figure 5-6. Large drops structures were only used if the spacing required for small drop structures was less than 100 ft.

5.4.5. Fully-Lined Channel

This reach alternative involves lining a portion of the channel cross-section with riprap for the full length of the reach. Riprap should be sized to handle the projected shear stress for the 100-year flood event with limited or no grade control. An illustration of this alternative is shown in Figure 5-7. Fully lined channels are only required where it is determined that large drop structures are not suitable due to spacing or width constraints. Fully-lined channels were not required anywhere in the Falcon Watershed but were considered for reach alternative comparison purposes.

5.4.6. Reach Alternative Comparison

All five of the reach alternatives were compared against each other using the evaluation parameters listed in Table 5-7 in order to help determine which reach alternative provides the most benefit to the watershed. Scores range from 1 to 5 where a score of 1 represents the best alternative for any given evaluation parameter and a score of 5 represents the worst alternative for any given evaluation parameter. The scoring system is intended to be relative so that each reach alternative is compared

against the other alternatives for each of the evaluation parameters. The lowest total score represents the best alternative.

Table 5-7. Reach Alternative Scoring Matrix

Evaluation Parameter	Protect In Place	Natural Channel Design	Small Drop Structures	Large Drop Structures	Fully Lined Channel
Reach Construction Cost	1	2	3	4	5
Reach O&M Costs	1	3	3	3	5
Flood Damage Reduction	1	1	3	4	5
Channel Stability (Near-Term)	1	2	3	4	5
Channel Stability (Long-Term)	1	2	3	4	5
Impact Upon Known Environmental Resources	1	2	3	4	5
Impact Upon Existing Utilities	3	3	3	3	3
Impact Upon Future Utilities	3	3	3	3	3
Impact Upon Existing Thoroughfares	3	3	3	3	3
Impact Upon Future Thoroughfares	3	3	3	3	3
ROW & Property Acquisition	1	3	3	3	5
Regulatory Issues	1	3	3	3	5
Trails & Open Space	1	3	3	3	5
Stormwater Quality	1	2	3	4	5
2-yr Flood Control	1	2	3	4	5
100-yr Flood Control	1	2	3	4	5
Flexibility for Development	5	5	3	3	1
Lot Premium	1	2	3	4	5
Habitat Improvements	1	2	3	4	5
Total	31	48	57	67	83

The Protect In Place reach alternative is the best reach alternative when compared against the list of evaluation parameters. However, it is not possible to implement this reach alternative in all of the planning reaches due to the criteria constraints previously outlined. Therefore, this scoring matrix was used to set the prioritization of how each reach alternative was implemented while adhering to the criteria previously described. Prioritization for the implementation of the five reach alternatives is as follows:

1. Protect In Place
2. Natural Channel Design
3. Small Drop Structures
4. Large Drop Structures

5. Fully Lined Channel

Some other benefits of the Protect In Place and Natural Channel Design alternatives that were not explicitly captured in Table 5-7 are that these alternatives provide aesthetic value, improve channel function, and limit erosion.

The result of this analysis for each of the detention alternatives is shown on Figure 5-1 through Figure 5-3.

5.4.7. Immediate Action Required

There are 5 locations where immediate action is required in order to preserve the existing reach conditions. These locations are at points adjacent to pristine channel reaches, or Natural Channel Design reaches, where current erosion or deposition has been identified. If left unmitigated, the issues at these locations have the potential to propagate and worsen the existing condition. This will require additional reach improvement costs. These locations can be addressed by implementing the recommended reach alternative for the impaired reach at the sites that are identified while improvements for the remainder of the impaired reaches can be constructed at a later date.

5.4.8. Reach Alternative Conceptual Cost Estimate

Conceptual cost estimates were developed for all of the reaches using flows from the three different detention alternatives in Section 5.3 and the reach alternative prioritization outlined above. These cost estimates were developed for comparison purposes only and were refined during plan development design. The cost estimates were based on the following assumptions:

- Natural Channel Design reach cost of \$400/LF as documented in the Cottonwood Creek DBPS
- Small Drops Structures reach cost of \$900/LF as documented in the Cottonwood Creek DBPS
- Large Drops Structures reach cost of \$2,600/LF as documented in the Cottonwood Creek DBPS
- 15% engineering and construction administration fee
- 20% contingency

Table 5-8. Reach Alternative Cost Summary

Detention Alternative	Reach Cost
No Detention	\$ 138,000,000
Regional Detention	\$ 125,000,000
Sub Regional Detention	\$ 111,000,000

5.5. Recommended Alternative

The Sub Regional Detention Alternative is the best alternative when compared against the list of evaluation parameters and it provides the most flow reduction throughout the watershed. This alternative was previously determined to be the most expensive detention alternative. However, this alternative results in the lowest reach improvement cost, using the reach prioritization previously described, and the lowest total cost as shown in Table 5-9. All of the costs developed in this section were for comparison purposes only and based on conservative estimates of required construction costs. Once the recommended alternative was selected, the detention and reach costs were then refined in the plan development design phase.

Table 5-9. Total Cost Summary

Detention Alternative	Detention Cost	Reach Cost	Total Cost
No Detention	\$ 0	\$ 138,000,000	\$ 138,000,000
Regional Detention	\$ 7,700,000	\$ 125,000,000	\$ 133,000,000
Sub Regional Detention	\$ 10,800,000	\$ 111,000,000	\$ 122,000,000

Detention pond spillway and drainageway crossing repair and/or replacement costs were the only cost component that was not evaluated in this section. In general, as peak flows are reduced due to increased detention the quantity of spillway and drainageway crossing deficiencies will decrease. Therefore, it is assumed that the Sub Regional Detention Alternative will result in the lowest repair and/or replacement costs to address these deficiencies. These deficiencies were revised and quantified once the recommended detention alternative was selected.

It is recommended that the Sub Regional Detention Alternative be used in combination with incorporating reach alternatives with the following prioritization:

1. Protect In Place
2. Natural Channel Design
3. Small Drop Structures
4. Large Drop Structures
5. Fully Lined Channel

5.5.1. Utility Coordination

It is anticipated that none of the major utility corridors will be impacted as a result of the recommended alternative. The major utility corridors identified by the County are:

- The Mountain View Electric Association corridor along Woodmen Road to Meridian Road
- The New Star Energy Oil Line which runs north on Meridian Road, from the intersection of Woodmen Road and Meridian Road, to Eastonville Road and then east on Eastonville Road

Figure 5-1. Do Nothing Alternative

Figure 5-2. Regional Detention Alternative

Figure 5-3. Sub Regional Detention Alternative

Figure 5-4. Natural Channel Design

Figure 5-5. Small Drop Structures

Figure 5-6. Large Drop Structures

Figure 5-7. Fully-Lined Channel

6.0 PLAN DEVELOPMENT DESIGN

6.1. Introduction

The purpose of the plan development design effort was to refine the selected detention and reach alternatives for the Falcon Watershed and finalize proposed infrastructure improvements and associated implementation costs. The recommended detention and reach alternatives, outlined in Section 5.0, were vetted through one public meeting and several project team meetings. The Sub Regional Detention Alternative along with the corresponding reach alternatives were selected to carry forward into plan development. The detention pond and reach components from the selected alternative were analyzed using a more detailed set of criteria to ensure that the recommendation would be feasible for future implementation. The outcome of the selected plan development design is a conceptual set of infrastructure improvements and costs for use in the fee development phase of this DBPS. All backup calculations and data are provided in Appendix D.

6.2. Selected Detention Alternative

The Sub Regional Detention Alternative that was recommended in Section 5.3 was refined by:

- Performing rough grading at each potential location.
- Maximizing storage for ponds based on existing site conditions.
- Modifying the SSD curves to target EURV or WQCV, and 100-yr volume with no spillway overtopping as outlined in Section 5-3. The EURV target outflow was based on releasing the EURV over 72 hours. The WQCV drain time was 40 hours. 100-yr target outflows were historical 100-yr flow where possible given storage constraints; selected as either the existing 100-yr flow or the lowest attainable 100-yr peak flow based on pond limitations. Release rates were greater than historic in some cases due to storage limitations. Storage and discharge requirements were calculated based on the guidelines outlined in the UDFCD DCM, Vol. 2.
- Assessing the hydrologic benefit of each pond.
- Spillway overtopping based on stage and storage calculations at 2 ft above the spillway elevation.

Full spectrum detention was incorporated into all existing and proposed detention ponds where applicable for this alternative. However, in some cases other controls were used due to pond volume limitations. A detailed analysis and summary for all of the detention ponds in the selected alternative are provided in Appendix D.

6.2.1. Detention Pond Classification

The selected detention alternative consists of 23 ponds that fall within 2 different classifications: existing constructed ponds and proposed ponds. All ponds are shown graphically in Figure 6-1.

Existing Constructed Ponds

Existing constructed ponds include PBH C, PBH A, PBH B1, PBH B2, M 1, R WUS, WH H, M 2, R MN, WH 5, PB 4, WH 1N, WH 1S, WH 2, WH 3, and WH 4. These ponds are currently constructed and functioning within the Falcon Watershed. Each of these ponds was evaluated to determine if it could be retrofit to provide a benefit to the selected detention alternative. Table 6-1 shows the proposed modification to the outlet stages of each of the existing constructed ponds.

Table 6-1. Existing Pond Outlet Modifications

Pond	Proposed Outlet Stages
Paintbrush Hills Pond C	EURV + 100-yr
Paintbrush Hills Pond A	WQCV + 100-yr
Paintbrush Hills Pond B1	Existing Configuration
Paintbrush Hills Pond B2	EURV + 100-yr
The Meadows Pond #1	EURV + 100-yr
Regional Pond WU South	EURV + 100-yr
Woodmen Hills Pond H	Existing Configuration
The Meadows Pond #2	EURV + 100-yr
Regional Pond MN	WQCV + 100-yr
Woodmen Hills Pond #5	EURV + 100-yr
Paint Brush Hills Pond #4	Existing Configuration
Woodmen Hills Pond #1 North	100-yr Only
Woodmen Hills Pond #1 South	EURV Only
Woodmen Hills Pond #2	EURV + 100-yr
Woodmen Hills Pond #3	WQCV + 100-yr
Woodmen Hills Pond #4	EURV + 100-yr

Both Woodmen Hills Pond H and Paint Brush Hills Pond #4 are grossly undersized and both of the spillways currently overtop during the 100-yr storm. As a result, no retrofit solution was provided for these ponds. It is recommended that on-site detention be incorporated upstream of these ponds to reduce flooding at these locations. The drainage area that needs to be mitigated by an EURV or WQCV at these pond locations was accounted for in downstream detention ponds.

Proposed Ponds

Proposed ponds include ponds SR 1, SR 2, SR 3, SR 4, R 1, SR 6, and R 2. These ponds are not constructed or planned for and are recommended as a part of the selected detention alternative. Table 6-2 shows the hydraulic configurations for the proposed ponds.

Table 6-2. Proposed Pond Outlet Configurations

Pond	Outlet Stages
Sub Regional Pond SR1	WQCV + 100-yr
Sub Regional Pond SR2	EURV Only
Sub Regional Pond SR3	EURV Only
Sub Regional Pond SR4	WQCV + 100-yr
Regional Pond R1	EURV + 100-yr
Sub Regional Pond SR6	EURV + 100-yr
Regional Pond R2	EURV Only

6.2.2. Hydrologic Results

The hydrologic results for the selected detention alternative are shown in Table 6-3. These results reflect all 23 ponds shown in Figure 6-1.

Table 6-3. Selected Detention Alternative Results

Location	HEC-HMS Element	Sub Regional Peak Flow (cfs)	
		2-year	100-year
West Tributary			
Raygor Rd.	JWT030	9	85
Stapleton Rd.	JWT120	55	710
Woodmen Rd.	JWT210	81	1,000
Hwy. 24	JWT250	64	980
Falcon Hwy.	JWT260	70	1,000
Garrett Rd.	JWT320	80	1,500
East Blaney Rd.	JWT354	140	2,200
Upstream of Bennett Ranch Tributary	JWT374_Outlet	140	2,200
Middle Tributary			
Woodmen Hills Dr.	JMT010	5	99
Woodmen Rd.	JMT070	31	840
Hwy. 24	JMT106	33	840
Falcon Hwy.	JMT110	34	860
Confluence with West Tributary	RMT114	34	860
East Tributary			
Stapleton Dr.	JET020	9	200
Woodmen Hills Dr.	JET040	10	260
Eastonville Rd.	JET060	13	360
Hwy. 24	JET090	31	300
Pinto Pony Rd.	JET100	32	300
Falcon Hwy.	JET120	50	400
Garrett Rd.	JET160	67	640
Confluence with West Tributary	RET164	66	630

6.2.3. Detention Pond Sizes & Cost Estimate

The detention ponds sizes and costs estimate as a result of selected detention alternative are provided in Table 6-4. Assumptions that were used in developing the detention pond cost estimate are as follows:

- Land requirement for proposed ponds is based on proposed rough grading and the corresponding footprint at the spillway stage.
- Construction cost based on \$24,500/ac-ft as documented in the Jimmy Camp Creek DBPS - FSD Costs Memo. Engineering costs were removed from construction cost and added later to the subtotal.
- Land cost was estimated as \$50,000/ac based on the current (2013) El Paso County Parks land value of \$46,954/ac.
- Improvement cost was estimated at \$20,000 per modified pond to retrofit existing outlet structures for EURV/WQCV and 100-yr flood control. Not all existing ponds were retrofit.

Table 6-4. Detention Pond Cost Estimate

Pond	Pond Volume (ac-ft)	Land Requirement (ac)	Construction Cost (\$)	Land Cost (\$)	Improvement Cost (\$)	Total Cost (\$)
Paint Brush Hills Pond #4	1.34	-	\$ -	\$ -	\$ -	\$ -
Paint Brush Hills Pond A	2.62	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Paint Brush Hills Pond B1	9.17	-	\$ -	\$ -	\$ -	\$ -
Paint Brush Hills Pond B2	12.09	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Paint Brush Hills Pond C	6.77	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Regional Pond MN	7.53	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Regional Pond R1	25.00	18.8	\$ 532,609	\$ 940,420	\$ -	\$ 1,473,028
Regional Pond R2	3.13	5.1	\$ 66,634	\$ 255,974	\$ -	\$ 322,608
Regional Pond WU South	39.54	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Sub Regional Pond SR1	11.03	3.4	\$ 234,987	\$ 170,782	\$ -	\$ 405,769
Sub Regional Pond SR2	2.05	5.2	\$ 43,674	\$ 257,529	\$ -	\$ 301,203
Sub Regional Pond SR3	1.03	0.6	\$ 21,943	\$ 27,609	\$ -	\$ 49,552
Sub Regional Pond SR4	19.37	20.5	\$ 412,665	\$ 1,022,834	\$ -	\$ 1,435,500
Sub Regional Pond SR6	11.82	6.7	\$ 251,817	\$ 334,260	\$ -	\$ 586,078
The Meadows Pond #1	3.25	-	\$ -	\$ -	\$ 20,000	\$ 20,000
The Meadows Pond #2	7.94	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Woodmen Hills Pond #1 North	7.13	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Woodmen Hills Pond #1 South	8.78	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Woodmen Hills Pond #2	9.18	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Woodmen Hills Pond #3	8.35	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Woodmen Hills Pond #4	40.45	-	\$ -	\$ -	\$ 240,000	\$ 240,000
Woodmen Hills Pond #5	4.10	-	\$ -	\$ -	\$ 20,000	\$ 20,000
Woodmen Hills Pond H	2.66	-	\$ -	\$ -	\$ -	\$ -
Subtotal						\$ 5,053,738
Engineering/ Construction Admin. (15%)						\$ 758,061
Contingency (20%)						\$ 1,010,748
Total						\$ 6,822,546

Additional costs as a percentage of the subtotal construction cost include Engineering/Construction Administration (15%), and Contingency (20%). Detailed quantities and cost estimates are provided in Appendix D.

6.2.4. Detention Pond Phasing Priority

Detention pond construction or modification should be phased so that detention ponds located at the upper end of tributaries are constructed first and detention ponds located on the main stem are constructed last. This method of phasing helps reduce sediment issues that may be caused by construction activities if upstream ponds are developed after ponds on the main stem. In addition to pond location, consideration must also be given to the timing of new development. Detention ponds should generally be constructed or modified along with upstream development with an interim condition in place to mitigate the increased sediment load caused by construction.

Table 6-5 lists the phasing priority for each of the existing and proposed ponds. A phasing priority of “1” means the pond should be constructed or modified immediately or as soon as upstream/adjacent development begins. Higher phasing priority numbers indicate more upstream detention ponds must be built prior to construction of the pond in question.

Table 6-5. Detention Pond Phasing Priority

Pond	Phasing Priority	Constraint
Paint Brush Hills Pond #4	2	None
Paint Brush Hills Pond A	1	Modify after PBH-C
Paint Brush Hills Pond B1	1	None
Paint Brush Hills Pond B2	1	Modify after PBH-B1
Paint Brush Hills Pond C	1	Modify after SR1
Regional Pond MN	3	None
Regional Pond R1	4	Construct after R-WU, R-MN, and WH5
Regional Pond R2	4	Construct after R1 and WH4
Regional Pond WU South	3	Modify after SR3
Sub Regional Pond SR1	1	None
Sub Regional Pond SR2	2	Construct after PBH-A and PBH-B2
Sub Regional Pond SR3	3	Construct after SR2 and M1
Sub Regional Pond SR4	3	Construct after M2 and WH-H
Sub Regional Pond SR6	2	Construct after PBH4
The Meadows Pond #1	2	None
The Meadows Pond #2	2	None
Woodmen Hills Pond #1 North	3	Construct after SR6
Woodmen Hills Pond #1 South	3	Construct after WH1n
Woodmen Hills Pond #2	3	Construct after WH1s
Woodmen Hills Pond #3	3	Construct after WH2
Woodmen Hills Pond #4	4	Construct after WH3
Woodmen Hills Pond #5	3	None
Woodmen Hills Pond H	2	None

6.3. Selected Reach Alternatives

The selected reach alternatives, as defined in Section 5-4, were refined using the flows reported in Section 6.2. Additionally, all bridge and culvert crossings were evaluated as a part of the selected reach alternatives. A summary of the selected reach alternatives is provided graphically in Figure 6-1.

6.3.1. Reach Evaluation

A summary of the reach screening results is provided in Table 6-6.

Table 6-6. Selected Reach Alternatives

Alternative	Length (ft)
Natural Channel Design	13,216
Protect in Place	64,325
Roadside Ditch Improvement	7,519
Small Drop Structures w/Toe Protection	50,751
Total	135,811

6.3.2. Bridge & Culvert Crossing Evaluation

All of the bridge and culvert crossings on the main stem of the creek were evaluated for adherence to DCM criteria. Bridge and culvert crossings were analyzed using the 100-year peak flow from the selected detention alternative. The culvert and bridge design criteria listed in the DCM, Pg. 6-10 was used to evaluate the adequacy of each crossing. The results of the evaluation are provided in Table 6-7.

Table 6-7. Existing Bridge and Culvert Crossing Evaluation

Crossing	Location	Q100 (cfs)	Structure Class ¹	Existing Size	Within Criteria ²	Reason
WT 14	Burgess Rd.	89	Culvert	1.5' dia	No	Overtops, Does Not Meet Hw/D
WT 13	Pine Park Trl.	89	Culvert	2.5' dia	No	Overtops, Does Not Meet Hw/D
WT 11	Arroya Ln	480	Culvert	1' dia	No	Overtops, Does Not Meet Hw/D
WT 10	Woodmen Rd.	1,000	Culvert	8.75' x 18.92'	Yes	
WT 9	Meridian Rd.	1,100	Bridge	(4) 6' x 10'	No	Does Not Meet Freeboard
Pond WU Inlet	Tamlin Rd.	1,100	Culvert	(3) 1.5' dia	No	Overtops, Does Not Meet Hw/D
WT 7-2	Rail Road	970	Bridge	7.41' x 54'	Yes	
WT 7-1	Hwy. 24	970	Bridge	(3) 6' x 12'	No	Does Not Meet Freeboard
WT 6	Falcon Hwy.	1,000	Culvert	(2) 5.58' x 8.25'	No	Overtops
WT 5	Meridian Rd.	1,100	Culvert	2' dia	No	Does Not Meet Hw/D
WT 5-2	Meridian Rd.	1,100	Culvert	1.5' dia	No	Overtops, Does Not Meet Hw/D
WT 4	W. Condor Rd.	1500	Bridge	4' dia	No	Overtops, Does Not Meet Freeboard
WT 3	Garrett Rd.	1,500	Bridge	(3) 7.33' x 12'	No	Does Not Meet Freeboard
WT 1	Blaney Rd.	2,200	Bridge	(2) 3' dia	No	Overtops, Does Not Meet Freeboard
MT 7	Owl Ln.	299	Culvert	1.25' x 1.75'	No	Overtops, Does Not Meet Hw/D
MT 6	Woodmen Rd.	840	Culvert	(3) 4' dia	No	Overtops, Does Not Meet Hw/D
MT 6-2	Woodmen Rd.	840	Culvert	(3) 4' dia	No	Overtops, Does Not Meet Hw/D
MT 5-1	McLaughlin Rd.	820	Bridge	5.22' x 27'	No	Does Not Meet Freeboard
MT 4	Rail Road	840	Bridge	9.17' x 77'	Yes	
MT 3	Hwy. 24	840	Bridge	(2) 6' x 12'	No	Does Not Meet Freeboard
MT 2	Swingline Rd.	860	Bridge	6.83' x 20'	No	Does Not Meet Freeboard
MT 1	Falcon Hwy.	860	Culvert	2' dia	No	Overtops, Does Not Meet Hw/D
ET 32	Liberty Grove Dr.	200	Culvert	(2) 3.5' dia	No	Does Not Meet Hw/D
ET 31	Stapleton Dr.	200	Culvert	(2) 2.5' x 6'	No	Overtops, Does Not Meet Hw/D
ET 30	Royal County Down Rd.	270	Culvert	6' dia	Yes	
ET 26	Rio Secco Ln.	270	Culvert	(3) 4' dia	No	Overtops, Does Not Meet Hw/D
ET 19	Eastonville Rd.	530	Culvert	6' dia	No	Does Not Meet Hw/D
ET 15	Rail Road	300	Bridge	6.5' x 67'	No	Does Not Meet Freeboard
ET 14	Hwy. 24	300	Bridge	(2) 4.83' x 12'	No	Does Not Meet Freeboard
ET 13	Pinto Pony Rd.	300	Culvert	(2) 4' dia	No	Overtops, Does Not Meet Hw/D
ET 11	Falcon Hwy.	400	Culvert	(2) 5' dia	No	Overtops, Does Not Meet Hw/D
ET 10	N. Condor Rd.	590	Culvert	3.17' x 4.67'	No	Overtops, Does Not Meet Hw/D
ET 9	Sunset Trl.	590	Culvert	4' dia	No	Overtops, Does Not Meet Hw/D
ET 4	Garrett Rd.	640	Culvert	3.17' x 4.67'	No	Overtops, Does Not Meet Hw/D

Notes:
¹According to the Drainage Criteria Manual

6.3.3. Plans & Profiles

Sheets 6-2 through 6-50 provide more detailed plan and profile views of selected reach improvements for each planning reach. These conceptual plans show stream centerline, detention ponds and associated data, proposed grade control structures, drainageway crossings and proposed improvements, and the approximate 100-yr floodplain along with existing infrastructure such as roadways and storm sewers. Hydraulic grade lines shown on the profile, representing the WSE for 5- and 100-year storm events, were generated using HEC-RAS along the main stem of each major tributary.

Sheets 6-51 through 6-56 provide typical details and section views of proposed reach grade control structures, detention pond profiles, and proposed roadside ditch improvements.

6.3.4. Reach Quantities & Cost Estimate

The assumptions and methods used to calculate the quantities and costs for each alternative category listed in Table 6-6 and defined in Section 5.4 are provided in the following sections. Additional costs as a percentage of the subtotal construction cost include Engineering/Construction Administration (15%) and Contingency (20%). Detailed quantities and cost estimates are provided in Appendix D.

Roadside Ditch Sizing

The quantities for this reach alternative include the infrastructure necessary to provide sufficient capacity for roadside ditches only. The required roadside ditch sizes were assumed to have the same slope and roughness as the infrastructure that is being replaced. The quantities and costs for all infrastructure sizing reaches are provided in Table 6-8.

Table 6-8. Roadside Ditch Cost Estimate

Reach	Length (ft)	Q100 (cfs)	Total Cost (\$)
RWT344	1,379	250	\$ 167,006
RWT354	16	2,200	\$ 23,544
RET140	4,052	85	\$ 295,914
RET164	2,072	630	\$ 132,703
Subtotal			\$ 619,166
Engineering/Construction Admin. (15%)			\$ 92,875
Contingency (20%)			\$ 123,833
Total			\$ 835,874

Natural Channel Design

The quantities for this reach alternative include the number of structures per reach. Natural channel design costs were developed with the following assumptions:

- The crest width for a natural channel drop structure is the channel width associated with the low flow (bankfull) event as defined in the DCM update Section 3.1.1.1.
- Natural channel structures were spaced at increments of 7 times the low flow channel width.
- Cost per structure based on \$24,400 per structure plus \$420 times the width of the low flow channel.

The quantities and costs for all natural channel design reaches are provided in Table 6-9.

Table 6-9. Natural Channel Design Reaches Cost Estimate

Reach	Length	Number of Structures	Cost
RET120	1,379	2	\$ 72,798
RET154	2,357	14	\$ 468,927
RET156	942	2	\$ 73,722
RWT094	2,145	7	\$ 1,474,717
RWT122	518	2	\$ 424,187
RWT150	3,741	24	\$ 765,482
RWT210_upstream	2,132	16	\$ 593,011
Subtotal			\$ 2,291,521
Engineering/Construction Admin. (15%)			\$ 343,728
Contingency (20%)			\$ 548,304
Total			\$ 3,093,554

Small Drop Structures

The quantities for this reach alternative include earthwork, rip rap toe protection, vegetation, and small (3ft vertical) drop structures. Note that small drop structures span the low flow channel width. Small drop structure reach costs were developed with the following assumptions:

- Earthwork is required to fill the existing degraded channel area to approximate the original section. Earthwork was estimated to cost \$15 per cubic yard.
- Revegetation is required to cover the area equal to the earthwork area. Revegetation was estimated to cost \$0.50 per square foot.
- Small drop structures are 3ft vertical with a 3ft key depth for a 6ft total height. The cost for small drop structures is estimated using a regression equation developed for this DBPS and is a function of their total height of 6ft and the low flow channel width. The average cost per small drop structure is about \$208,000.
- Small drop structures are to be spaced by assuming that the existing channel slope degrades to a design slope less than 0.4 percent and the total drop structure height (6ft) is utilized.

The quantities and costs for all small drop structure reaches are provided in Table 6-10.

Table 6-10. Small Drop Structure Reaches Cost Estimate

Reach	Length	Cost (\$)
RET020	1,915	\$ 1,169,444
RET030	5,042	\$ 1,405,908
RET040	1,820	\$ 1,073,275
RET100	1,791	\$ 1,342,120
RET110	2,751	\$ 1,055,516
RET152	2,030	\$ 1,081,390
RET162	3,256	\$ 656,460
RMT050	1,568	\$ 814,189
RMT062	5,688	\$ 2,381,127
RMT064	3,358	\$ 1,231,110
RMT102	1,021	\$ 636,082
RMT104	874	\$ 186,349
RMT106	226	\$ 212,322
RMT112	3,372	\$ 1,276,142
RMT114	1,667	\$ 853,693
RWT054	2,497	\$ 1,414,531
RWT080	3,494	\$ 2,345,153
RWT092	626	\$ 414,434
RWT124_upstream	1,246	\$ 640,054
RWT174	1,871	\$ 606,335
RWT234	2,129	\$ 976,863
RWT296	1,134	\$ 223,458
RWT372	1,377	\$ 947,221
Subtotal		\$ 22,943,176
Engineering/Construction Admin. (15%)		\$ 3,441,476
Contingency (20%)		\$ 4,588,635
Total		\$ 30,973,288

Bridge and Culvert Crossing Replacements

The proposed size for crossing replacements includes the infrastructure necessary to provide the bridge or culvert with sufficient capacity to adhere to DCM criteria. Costs were estimated using a regression equation developed for this DBPS that was based on 2012 UDFCD master plan costs. Note that several crossings (e.g., WT 5-2, WT 4, WT 1, and MT 1) require such a large number of cells to comply with criteria that the proposed configurations are likely impractical. These locations may necessitate consideration of a more comprehensive capital improvement project including raising the roadway profile to achieve feasibility. The quantities and costs for all crossing replacements are provided in Table 6-11.

Table 6-11. Crossing Replacement Cost Estimate

Crossing	Location	Q100 (cfs)	Proposed Size	Length	Total Cost
WT 14	Burgess Rd.	89	5'	66	\$ 31,585
WT 13	Pine Park Trl.	89	5'	53	\$ 28,525
Pond WU Inlet Structure	Tamlin Rd.	1,110	(8) 6' x 12'	74	\$ 658,410
WT 6	Falcon Hwy.	1,000	(5) 6' x 12'	43	\$ 249,775
WT 5	Meridian Rd.	1,100	3'	43	\$ 8,651
WT 5-2	Meridian Rd.	1,100	(25) 3' x 10'	43	\$ 718,121
WT 4	W. Condor Rd.	1,500	(11) 5' x 12'	48	\$ 528,324
WT 3	Garrett Rd.	1,500	(3) 9' x 12'	46	\$ 218,292
WT 1	Blaney Rd.	2,200	(16) 5' x 12'	40	\$ 636,648
MT 7	Owl Ln.	299	(9) 2' x 4'	58	\$ 207,465
MT 6	Woodmen Rd.	840	(3) 5'	200	\$ 166,177
MT 6-2	Woodmen Rd.	840	(3) 5'	220	\$ 181,365
MT 5-1	McLaughlin Rd.	820	(3) 7' x 12'	48	\$ 191,098
MT 2	Swingline Rd.	840	(3) 8' x 12'	83	\$ 343,147
MT 1	Falcon Hwy.	860	(11) 4' x 12'	45	\$ 433,032
ET 31	Stapleton Dr.	200	(2) 4' x 12'	302	\$ 525,026
ET 19	Eastonville Rd.	530	7' x 10'	39	\$ 63,340
ET 13	Pinto Pony Rd.	300	(2) 6' x 8'	50	\$ 113,991
ET 11	Falcon Hwy.	400	(2) 6' x 8'	40	\$ 84,348
ET 10	N. Condor Rd.	590	(3) 7' x 10'	44	\$ 162,656
ET 9	Sunset Trl.	490	(2) 6' x 8'	40	\$ 84,102
ET 4	Garrett Rd.	640	(2) 5' x 8'	61	\$ 106,060
Subtotal					\$ 5,740,139
Engineering/Construction Admin. (15%)					\$ 861,021
Contingency (20%)					\$ 1,148,028
Total					\$ 7,749,187

No crossing improvements were necessary at WT 10, WT 7-2, MT 4, or ET 30 since the hydraulic condition at these locations were within criteria as noted in Table 6-7. Crossings WT 7-1, MT 3, and ET 14 were not resized because they are CDOT structures. Crossing WT 11 was not resized because it is located under a private drive. Other crossings, including WT 9, ET 32, ET 26, and ET 15, were not resized because the degree of criteria exceedance was so minor that they did not warrant replacement.

6.3.5. Immediate Action Required

There are 6 locations where immediate action is required in order to preserve the existing reach conditions as shown in Figure 6-1. These locations are at points adjacent to pristine channel reaches, or Natural Channel Design reaches, where current erosion or deposition has been identified. If left unmitigated, the issues at these locations have the potential to propagate and worsen the existing condition, thereby necessitating additional reach improvement costs. These locations can be addressed by implementing the recommended reach alternative for the impaired reach at the sites that are identified while improvements for the remainder of the impaired reaches can be constructed at a later date.

6.3.6. Protect In Place

There are several relatively pristine reaches of channel throughout the Falcon Watershed that are currently in a stable condition. Additionally, there are several reaches throughout the Falcon Watershed that have already been improved and appear to be stable. Preserving both of these reach conditions would not require a direct reach improvement cost. However, upstream detention improvements may be required depending on the location of the reach.

6.3.7. Reach Phasing Priority

Reach construction should be phased so that planned upstream detention ponds are constructed prior to reach construction. This method of phasing protects the reach alternatives from being damaged as a result of higher than designed for flows being released into the reach. A phasing priority of 1 means the reach can be constructed. Higher phasing priority numbers indicate more upstream detention ponds should be built prior to construction of the reach in question. The phasing priority for each of the reaches is provided in Appendix D.

6.4. Cost Summary

Costs for all detention ponds, reach improvements, bridge and culvert replacements, and roadside ditches are summarized in Table 6-12.

Table 6-12. Cost Summary

Alternative	Cost ¹
Detention Ponds	\$ 6,822,546
Roadside Ditches	\$ 835,874
Reaches ²	\$ 34,066,842
Bridge & Culvert Crossings	\$ 7,749,187
Total	\$ 49,474,449

Notes:

¹Includes all construction and additional costs

²Reaches includes both Natural Channel Design and Small Drop Structure reaches

Figure 6-1. Selected Plan

Sheet 6-2 to Sheet 6-19. Falcon DBPS Conceptual Plan West Tributary

Sheet 6-20 to Sheet 6-25. Falcon DBPS Conceptual Plan Middle Tributary

Sheet 6-26 to Sheet 6-38. Falcon DBPS Conceptual Plan East Tributary

Sheet 6-39 to Sheet 6-50. Falcon DBPS Conceptual Plan Small Tributaries

Sheet 6-51. Typical Natural Channel Cross-Sections

Sheet 6-52. Typical Rock Cross Vane Details

Sheet 6-53. Typical Riffle Cross Sections

Sheet 6-54. Typical Grouted Sloping (GSB) Boulder Drop Structure

Sheet 6-55. Typical Profile of Detention Basin

Sheet 6-56. Typical Roadside Ditch Improvements

7.0 FEE DEVELOPMENT

7.1. Introduction

The objective of the fee development exercise was to determine the equitable share of drainage improvement costs that a developer is responsible for paying to El Paso County if they wish to plat a property. This fee is a function of the total cost for the selected plan outlined in Section 6 and will be used by the County to pay for drainage improvements that are necessary as a result of development. The product of this calculation is a unit fee (cost/impervious acre) that is a one-time charge to the developer based on the number of impervious acres within the platted property.

7.2. Developable Land

The Falcon Watershed has a total area of 6,847 acres. The entirety of the watershed is within the County with 1,969 acres unplatted, according to the GIS dataset received from the County. This dataset also includes unplatted areas that can't be developed because of specific land use designations. Table 7-1 provides a summary of land classifications in the Falcon Watershed. A complete summary of unplatted area land use is provided in Appendix E.

Table 7-1. Land Classification

Classification	Area (acres)
Platted	3,670
Unplatted	1,969
Other	1,208
Total	6,847

The projected impervious acreage within unplatted areas totals 645.58 acres. A summary of land classification within the Falcon Watershed is provided in Figure 7-3.

7.3. Fee Calculation & County Cost

The total cost for the Selected Plan was separated into a Development Fee, County Cost, Metropolitan District Cost, and Drainage and Bridge Funds. A description of how the aforementioned were defined is as follows:

- **County Cost** – Drainage improvement costs that are the responsibility of the County as shown in Figure 7-1.
- **Metropolitan District Cost** – Drainage improvement costs that are the responsibility of a metropolitan district as shown in Figure 7-2.
- **Development Fee** – All drainage improvement costs that are directly associated with new development.
- **Drainage and Bridge Funds** – The balance of drainage and bridge funds as of August 2015 was \$584,134 and \$510,777, respectively, with a liability of \$300,000 cost for this DBPS (an additional contract amendment increased the cost of this DBPS to \$339,088).

The anticipated reimbursements due for work completed in the Falcon Watershed are approximately equivalent to the available drainage and bridge funds. As a result, reimbursements were not included in

the fee calculation. Drainage improvements that are required as a result of new development are listed in Appendix E.

The costs apportioned to County and metropolitan district drainage improvements are provided in Table 7-2 and Table 7-3. The bridge improvement fees shown in Table 7-2 and Table 7-3 were determined by classification of the crossing as either a bridge or a culvert. This classification was based on the DCM criteria.

Table 7-2. County Cost

Drainage Improvements	\$ 24,051,349
Bridge Improvements	\$ 2,887,437
Total Cost	\$ 26,938,786

Table 7-3. Metropolitan District Cost

Drainage Improvements	\$ 3,972,407
Bridge Improvements	\$ 1,855,620
Total Cost	\$ 5,828,027

The development cost and corresponding fee calculations based on impervious acreage are provided in Table 7-4 and 7-5.

Table 7-4. Development Drainage Cost and Fee

Drainage Improvements	\$ 14,649,163
DBPS Cost	\$ 339,088
Total Cost	\$ 14,988,251
Drainage Fee (per imp. ac.)	\$ 23,217

Table 7-5. Development Bridge Cost and Fee

Bridge Improvements	\$ 2,058,474
Total Cost	\$ 2,058,474
Bridge Fee (per imp. ac.)	\$ 3,189

Appendix A. Hydrologic Analysis

Appendix B. Hydraulic Analysis

Appendix C. Alternatives Analysis

Appendix D. Plan Development

Appendix E. Fee Development

Falcon DBPS
Subbasin Properties

Subbasin ID	Area (mi ²) ²	Existing % Impervious ³	Curve Number ³			Lag Time (min)		
			Historical	Existing	Future	Historical ⁴	Existing ²	Future ⁵
ET010	0.15	21.72%	61	69	72	33.64	25.23	18.92
ET020	0.21	19.07%	61	68	73	23.15	17.37	13.02
ET030	0.20	27.31%	41	71	72	42.61	31.96	23.97
ET040	0.15	20.35%	42	69	69	29.71	22.28	22.28
ET050	0.12	19.07%	39	68	68	10.36	7.77	7.77
ET060	0.29	21.94%	39	69	69	7.38	5.54	5.54
ET070	0.25	26.60%	39	71	71	10.51	7.88	7.88
ET080	0.29	37.81%	39	75	76	25.98	19.49	14.61
ET090	0.12	12.34%	39	61	74	54.90	41.18	30.88
ET100	0.05	3.12%	39	48	63	10.67	8.00	6.00
ET110 ¹	0.23	1.49%	39	54	61	25.68	25.68	19.26
ET120	0.11	6.79%	39	60	61	38.28	28.71	21.53
ET130	0.13	6.57%	39	61	63	61.63	46.22	34.67
ET140	0.27	3.21%	39	61	63	92.13	69.09	51.82
ET150 ¹	0.18	1.79%	39	62	62	25.39	25.39	25.39
ET160	0.19	3.36%	42	64	64	41.04	30.78	30.78
FS010	0.12	1.16%	44	49	56	41.23	30.92	23.19
MT010	0.29	6.99%	45	64	64	42.16	31.62	31.62
MT020 ¹	0.09	1.48%	57	62	68	12.94	12.94	9.71
MT030	0.16	13.35%	54	66	67	19.92	14.94	11.21
MT040	0.31	7.07%	55	64	75	35.44	26.58	19.93
MT050	0.12	16.00%	39	67	67	34.84	26.13	26.13
MT060 ¹	0.19	1.83%	39	55	66	27.90	27.90	20.93
MT070	0.20	5.68%	42	59	67	54.09	40.57	30.42
MT080	0.06	63.24%	48	86	87	6.91	5.18	3.88
MT090	0.04	60.08%	39	83	85	4.92	3.69	2.77
MT100	0.06	13.21%	39	67	70	21.19	15.89	11.92
MT110	0.12	18.56%	39	68	68	32.51	24.38	24.38
WT010 ¹	0.14	2.31%	56	58	58	24.38	24.38	24.38
WT020 ¹	0.07	2.39%	56	59	59	27.95	27.95	27.95
WT030	0.08	3.57%	57	59	59	17.99	13.49	13.49
WT040 ¹	0.19	2.72%	56	58	58	34.99	34.99	34.99
WT050 ¹	0.19	1.60%	60	62	62	26.99	26.99	26.99
WT060	0.20	2.35%	59	61	61	44.53	33.40	33.40
WT070 ¹	0.17	1.31%	56	58	58	18.77	18.77	18.77
WT080 ¹	0.07	1.95%	60	62	62	17.52	17.52	17.52
WT090 ¹	0.15	0.66%	61	62	63	21.52	21.52	16.14
WT100 ¹	0.19	1.28%	61	62	69	13.65	13.65	10.24
WT110 ¹	0.19	2.04%	60	61	63	29.57	29.57	22.18
WT120 ¹	0.05	2.96%	43	54	63	19.24	19.24	14.43

Falcon DBPS Curve Numbers

Historical Curve Numbers

Land Use	Hydrologic Soil Group			
	A	B	C	D
Rangeland Good Condition	39	61	74	80
Woods Good Condition	30	55	70	77
Water	98	98	98	98

Notes:

- 1 Rangeland Good Condition values from Aerawide Urban Runoff Control Manual, Pg. 26-27
- 2 Other values from TR55, Table 2-2

Existing Curve Numbers

Land Use	Hydrologic Soil Group			
	A ¹	B	C	D
Rangeland Good Condition	39	61	74	80
Woods Good Condition	30	55	70	77
Open Space Good Condition	39	61	74	80
Gravel Roads	76	85	89	91
Water	98	98	98	98
Impervious Area	98	98	98	98

Notes:

- ¹ All HSG Type A soils that have been graded shall be considered HSG Type B soils
- 2 Rangeland Good Condition values from Aerawide Urban Runoff Control Manual, Pg. 26-27
- 3 Other values from TR55, Table 2-2

Future Curve Numbers

Land Use	Average CN
0.50 Acre Residential	71
2.5 Acre Rural Residential	64
5 Acre Rural Residential - Woods	58
5 Acre Rural Residential - Rangeland	62
Community Commercial/Service Commercial	81
Light Industrial	96
Single Family Urban	79

Notes:

- 1 Values represent the average CN values that were developed for Existing Conditions for each corresponding land use

**Falcon DBPS
Ia Adjustment**

Subbasin ID	Historical CN	Ia (in)	Existing CN	Ia (in)	Future CN	Ia (in)
ET010	61	0.64	69	0.45	72	0.39
ET020	61	0.64	68	0.47	73	0.37
ET030	41	1.44	71	0.41	72	0.39
ET040	42	1.38	69	0.45	69	0.45
ET050	39	1.56	68	0.47	68	0.47
ET060	39	1.56	69	0.45	69	0.45
ET070	39	1.56	71	0.41	71	0.41
ET080	39	1.56	75	0.33	76	0.32
ET090	39	1.56	61	0.64	74	0.35
ET100	39	1.56	48	1.08	63	0.59
ET110	39	1.56	54	0.85	61	0.64
ET120	39	1.56	60	0.67	61	0.64
ET130	39	1.56	61	0.64	63	0.59
ET140	39	1.56	61	0.64	63	0.59
ET150	39	1.56	62	0.61	62	0.61
ET160	42	1.38	64	0.56	64	0.56
FS010	44	1.27	49	1.04	56	0.79
MT010	45	1.22	64	0.56	64	0.56
MT020	57	0.75	62	0.61	68	0.47
MT030	54	0.85	66	0.52	67	0.49
MT040	55	0.82	64	0.56	75	0.33
MT050	39	1.56	67	0.49	67	0.49
MT060	39	1.56	55	0.82	66	0.52
MT070	42	1.38	59	0.69	67	0.49
MT080	48	1.08	86	0.16	87	0.15
MT090	39	1.56	83	0.20	85	0.18
MT100	39	1.56	67	0.49	70	0.43
MT110	39	1.56	68	0.47	68	0.47
WT010	56	0.79	58	0.72	58	0.72
WT020	56	0.79	59	0.69	59	0.69
WT030	57	0.75	59	0.69	59	0.69
WT040	56	0.79	58	0.72	58	0.72
WT050	60	0.67	62	0.61	62	0.61
WT060	59	0.69	61	0.64	61	0.64
WT070	56	0.79	58	0.72	58	0.72
WT080	60	0.67	62	0.61	62	0.61
WT090	61	0.64	62	0.61	63	0.59
WT100	61	0.64	62	0.61	69	0.45
WT110	60	0.67	61	0.64	63	0.59
WT120	43	1.33	54	0.85	63	0.59
WT130	60	0.67	72	0.39	72	0.39
WT140	61	0.64	62	0.61	70	0.43
WT150	61	0.64	65	0.54	74	0.35

Falcon DBPS

Existing Time of Concentration Calculations

Worksheet for computation of time of travel according to

TR-55 methodology

Blue - GIS defined, Green - user specified, White and yellow - calculated, Red - final result

Watershed Name	WT060	WT050	WT080	WT090	WT110	WT100	ET070	WT150	WT140	MT010	ET060	WT170
Watershed ID	177	66	342	69	70	71	83	332	146	151	210	282
Sheet Flow Characteristics												
Manning's Roughness Coefficient	0.4	0.15	0.15	0.15	0.4	0.011	0.011	0.011	0.15	0.15	0.011	0.15
Flow Length (ft)	100	297	152	131	125	47.4265	100	100	252.4879	220.7734	44.6252	120.7109
Two-Year 24-hour Rainfall (in)	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
Land Slope (ft/ft)	0.0776	0.0316	0.0712	0.0669	0.0937	0.0401	0.0437	0.0174	0.0715	0.0874	0.1261	0.0224
Sheet Flow Tt (hr)	0.26	0.40	0.17	0.15	0.29	0.01	0.02	0.03	0.25	0.21	0.01	0.22
Shallow Concentrated Flow Characteristics												
Surface Description (1 - unpaved, 2 - paved)	1	1	1	1	1	1	1	1	1	1	1	1
Flow Length (ft)	629	630	921	4216	2838	625.1232	564.9179	0	340.5642	3491.1034	278.3003	723.4077
Watercourse Slope (ft/ft)	0.0429	0.0401	0.0474	0.0339	0.034	0.0471	0.0115	0	0.0301	0.0267	0.0446	0.0168
Average Velocity - computed (ft/s)	3.34	3.23	3.51	2.97	2.98	3.50	1.73	0.00	2.80	2.64	3.41	2.09
Shallow Concentrated Flow Tt (hr)	0.05	0.05	0.07	0.39	0.26	0.05	0.09	0.00	0.03	0.37	0.02	0.10
Channel Flow Characteristics												
Cross-sectional Flow Area (ft ²)	3.82	102.48	26.55	41.73	5.37	112.64	9.62	9	3.47	60.78	15.9	76.89
Wetted Perimeter (ft)	12.23	70.06	41.28	84.92	11.19	110.27	11	14.04	12.11	77.26	14.14	58.7
Hydraulic Radius - computed (ft)	0.31	1.46	0.64	0.49	0.48	1.02	0.87	0.64	0.29	0.79	1.12	1.31
Channel Slope (ft/ft)	0.0344	0.024	0.0247	0.012	0.0219	0.021	0.013	0.0036	0.0255	0.0226	0.0132	0.0184
Manning's Roughness Coefficient	0.06	0.05	0.05	0.03	0.05	0.05	0.013	0.05	0.05	0.05	0.013	0.05
Average Velocity - computed (ft/s)	2.12	5.95	3.49	3.39	2.70	4.38	11.95	1.33	2.07	3.82	14.24	4.84
Flow Length (ft)	4722	6298	3073	604	2635	5032.4692	4731.5554	5328.7401	2294.7909	4121.0832	6400.2723	3430.8373
Channel Flow Tt (hr)	0.62	0.29	0.24	0.05	0.27	0.32	0.11	1.11	0.31	0.30	0.12	0.20
Watershed Time of travel (hr)	0.93	0.75	0.49	0.60	0.82	0.38	0.22	1.14	0.60	0.88	0.15	0.52
Watershed Lag Time (min)	33.40	26.99	17.52	21.52	29.57	13.65	7.88	41.04	21.46	31.62	5.54	18.61
Number of watersheds	64											
MXD Path	Falcon_DBPS.mxd											
Stored workbook												
\$AVHOME directory												
Name of the table to store the results of the calculation	Subbasin1											
Workspace path	C:\GeoHMS\Falcon_DBPS\Falcon_DBPS.mdb											

Notes:

¹ Sheet Flow Manning's n values from Table 3-1 in TR55

² For LFP's with no Shallow Concentrated Flow length, slopes were manually changed from NaN (default) to 0 and Shallow Concentrated Flow Tc was changed to 0 so Watershed Time of Travel could be computed.

³ Channel Flow Manning's n values were selected from multiple sources and are documented in the Manning's n Value Selection Quality Assurance packet

⁴ Watershed Lag Time = 0.6*Watershed Time of Travel

Falcon DBPS

Existing Time of Concentration Calculations

Worksheet for computation of time of travel according to

TR-55 methodology

Blue - GIS defined, Green - user specified, White and yellow -

calculated, Red - final result

Watershed Name	WT010	WT280	ET140	ET130	WT230	WT040	MT020	MT050	WT240	WT250	ET110	ET100	WT220	WT370	WT350	WT340	WT330
Watershed ID	183	247	351	353	407	588	635	649	663	667	681	682	267	114	214	116	123
Sheet Flow Characteristics																	
Manning's Roughness Coefficient	0.4	0.15	0.15	0.15	0.24	0.4	0.15	0.24	0.011	0.011	0.15	0.011	0.011	0.15	0.15	0.15	0.15
Flow Length (ft)	146.5688	68.6391	118.6398	119.4977	45.0001	128.3412	16.2369	167.7821	54	110.7786	296.0756	48.2844	56.2392	148.5814	199.706	296.2138	298.7012
Two-Year 24-hour Rainfall (in)	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
Land Slope (ft/ft)	0.0766	0.0321	0.0214	0.0243	0.1104	0.0443	0.0215	0.0209	0.037	0.0125	0.0362	0.1191	0.019	0.0363	0.024	0.0345	0.05
Sheet Flow Tt (hr)	0.35	0.12	0.22	0.22	0.08	0.39	0.05	0.44	0.01	0.03	0.38	0.01	0.02	0.22	0.33	0.39	0.34
Shallow Concentrated Flow Characteristics																	
Surface Description (1 - unpaved, 2 - paved)	1	1	1	1	2	1	1	2	2	2	1	1	1	1	1	1	1
Flow Length (ft)	742.1945	1860.327	1172.282	828.555	181.5689	984.9924	3260.587	275.2087	0	0	2365.505	762.0473	5060.256	0	3420.637	4497.88	5188.524
Watercourse Slope (ft/ft)	0.04	0.0259	0.0172	0.0128	0.0228	0.0516	0.032	0.0239	0	0	0.0271	0.0225	0.021	0	0.0467	0.0237	0.0225
Average Velocity - computed (ft/s)	3.23	2.60	2.12	1.83	3.07	3.67	2.89	3.14	0.00	0.00	2.66	2.42	2.34	0.00	3.49	2.48	2.42
Shallow Concentrated Flow Tt (hr)	0.06	0.20	0.15	0.13	0.02	0.07	0.31	0.02	0.00	0.00	0.25	0.09	0.60	0.00	0.27	0.50	0.60
Channel Flow Characteristics																	
Cross-sectional Flow Area (ft ²)	3.99	2.43	25.47	21.02	4.39	8.4	20.97	2.91	4.39	4.39	39.65	4.58	6.73	30.81	59.79	6.55	12.59
Wetted Perimeter (ft)	15.4	9.26	84.23	169.15	23.26	26.23	40.88	6.68	23.26	23.26	105.42	8.91	12.27	26.96	38.47	17.42	25.95
Hydraulic Radius - computed (ft)	0.26	0.26	0.30	0.12	0.19	0.32	0.51	0.44	0.19	0.19	0.38	0.51	0.55	1.14	1.55	0.38	0.49
Channel Slope (ft/ft)	0.0324	0.0179	0.0113	0.0144	0.009	0.026	0	0.0173	0.0175	0.0112	0.0114	0.0119	0.0108	0.0119	0.0088	0.0209	0.0119
Manning's Roughness Coefficient	0.06	0.03	0.06	0.05	0.013	0.05	0.05	0.03	0.013	0.013	0.03	0.03	0.03	0.05	0.05	0.03	0.05
Average Velocity - computed (ft/s)	1.82	2.72	1.19	0.89	3.58	2.25	0.00	3.75	4.99	3.99	2.76	3.48	3.46	3.55	3.75	3.74	2.01
Flow Length (ft)	1719.181	2209.347	6595.197	3022.555	4460.603	4086.883	0	3582.906	4002.366	3560.407	866.4156	1602.548	1573.016	6132.815	3083.294	4257.557	508.9379
Channel Flow Tt (hr)	0.26	0.23	1.54	0.94	0.35	0.50	0.00	0.27	0.22	0.25	0.09	0.13	0.13	0.48	0.23	0.32	0.07
Watershed Time of travel (hr)	0.68	0.55	1.92	1.28	0.44	0.97	0.36	0.73	0.23	0.28	0.71	0.22	0.74	0.70	0.83	1.21	1.00
Watershed Lag Time (min)	24.38	19.72	69.09	46.22	15.88	34.99	12.94	26.13	8.45	10.10	25.68	8.00	26.77	25.11	29.76	43.40	36.05
Number of watersheds																	
MXD Path																	
Stored workbook																	
\$AVHOME directory																	
Name of the table to store the results of the calculation																	
Workspace path																	

Falcon DBPS

Existing Time of Concentration Calculations

Worksheet for computation of time of travel according to

TR-55 methodology

Blue - GIS defined, Green - user specified, White and yellow -

calculated, Red - final result

Watershed Name	WT030	WT020	WT210	ET160	WT360	WT260	WT290	WT270	ET120	ET090	WT180	MT040	WT200	WT190	WT130	WT320	ET010
Watershed ID	187	189	199	221	227	256	238	242	252	262	848	272	276	278	288	308	318
Sheet Flow Characteristics																	
Manning's Roughness Coefficient	0.15	0.4	0.15	0.15	0.011	0.15	0.011	0.011	0.011	0.24	0.25	0.15	0.15	0.011	0.15	0.15	0.15
Flow Length (ft)	141.2626	266.2251	285.0006	80.005	87.4266	100	100	40.3554	61.2133	138.9952	296	75.2183	183.5462	100	88.7973	261.2747	78
Two-Year 24-hour Rainfall (in)	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
Land Slope (ft/ft)	0.103	0.1066	0.0231	0.0189	0.0402	0.0508	0.0513	0.0274	0.0332	0.0589	0.027	0.0608	0.0297	0.0174	0.0421	0.0858	0.0256
Sheet Flow Tt (hr)	0.14	0.50	0.44	0.17	0.02	0.14	0.02	0.01	0.01	0.25	0.64	0.10	0.28	0.03	0.14	0.24	0.15
Shallow Concentrated Flow Characteristics																	
Surface Description (1 - unpaved, 2 - paved)	1	1	1	1	1	1	1	1	1	1	2	1	1	1	2	1	1
Flow Length (ft)	432.1399	295.3505	4198.315	3912.236	2241.548	1133.028	267.4881	0	5817.561	0	4489.17	3144.352	9180.05	0	0	2919.894	528
Watercourse Slope (ft/ft)	0.0424	0.0619	0.0198	0.0146	0.0171	0.0154	0.0196	0	0.0164	0	0.024	0.03	0.0209	0	0	0.0372	0.0303
Average Velocity - computed (ft/s)	3.32	4.01	2.27	1.95	2.11	2.00	2.26	0.00	2.07	0.00	3.15	2.79	2.33	0.00	0.00	3.11	2.81
Shallow Concentrated Flow Tt (hr)	0.04	0.02	0.51	0.56	0.30	0.16	0.03	0.00	0.78	0.00	0.40	0.31	1.09	0.00	0.00	0.26	0.05
Channel Flow Characteristics																	
Cross-sectional Flow Area (ft ²)	6.12	8.51	39.77	22.37	10.27	0.82	41.59	9.66	25.13	9.72	163.44	4.32	25.69	3.88	4.39	28.9	15.97
Wetted Perimeter (ft)	11.83	29.87	160.6	24.5	37.46	3.97	114.48	33.28	25.13	31.92	140.79	7.39	57.74	14.09	23.26	26.6	31.94
Hydraulic Radius - computed (ft)	0.52	0.28	0.25	0.91	0.27	0.21	0.36	0.29	1.00	0.30	1.16	0.58	0.44	0.28	0.19	1.09	0.50
Channel Slope (ft/ft)	0.0224	0.0271	0.0145	0.0093	0.0083	0.0082	0.0107	0.0147	0.005	0.0096	0.0135	0.0172	0.0316	0.0232	0.0249	0.0101	0.0217
Manning's Roughness Coefficient	0.05	0.06	0.06	0.03	0.05	0.06	0.05	0.03	0.013	0.03	0.05	0.03	0.05	0.03	0.013	0.05	0.05
Average Velocity - computed (ft/s)	2.87	1.77	1.18	4.51	1.15	0.79	1.57	2.64	8.10	2.20	3.82	4.55	3.09	3.20	5.95	3.17	2.77
Flow Length (ft)	2076.623	1662.612	2770.435	2028.925	1285.17	2358.52	2236.363	3268.233	47.5001	7102.49	443	5292.631	316	3336.891	3894.055	2166.302	4966.49
Channel Flow Tt (hr)	0.20	0.26	0.65	0.13	0.31	0.83	0.40	0.34	0.00	0.90	0.03	0.32	0.03	0.29	0.18	0.19	0.50
Watershed Time of travel (hr)	0.37	0.78	1.61	0.85	0.62	1.13	0.45	0.35	0.80	1.14	1.07	0.74	1.40	0.32	0.32	0.69	0.70
Watershed Lag Time (min)	13.49	27.95	57.82	30.78	22.45	40.67	16.05	12.76	28.71	41.18	38.49	26.58	50.45	11.37	11.44	24.97	25.23
Number of watersheds																	
MXD Path																	
Stored workbook																	
\$AVHOME directory																	
Name of the table to store the results of the calculation																	
Workspace path																	

Falcon DBPS

Existing Time of Concentration Calculations

Worksheet for computation of time of travel according to

TR-55 methodology

Blue - GIS defined, Green - user specified, White and yellow - calculated, Red - final result

Watershed Name	ET020	WT070	ET050	ET040	FS010
Watershed ID	328	343	467	468	5
Sheet Flow Characteristics					
Manning's Roughness Coefficient	0.15	0.4	0.011	0.011	0.011
Flow Length (ft)	43.6613	45.0001	47.0712	301.3711	29
Two-Year 24-hour Rainfall (in)	2.1	2.1	2.1	2.1	2.1
Land Slope (ft/ft)	0.1105	0.0566	0.0263	0.052	0.0552
Sheet Flow Tt (hr)	0.05	0.15	0.01	0.04	0.01
Shallow Concentrated Flow Characteristics					
Surface Description (1 - unpaved, 2 - paved)	2	1	1	1	1
Flow Length (ft)	0	861.3369	1478.833	0	0
Watercourse Slope (ft/ft)	0	0.0441	0.0202	0	0
Average Velocity - computed (ft/s)	0.00	3.39	2.29	0.00	0.00
Shallow Concentrated Flow Tt (hr)	0.00	0.07	0.18	0.00	0.00
Channel Flow Characteristics					
Cross-sectional Flow Area (ft ²)	3.55	13.56	12.57	2.07	10
Wetted Perimeter (ft)	9.58	20.48	12.57	6.76	40.01
Hydraulic Radius - computed (ft)	0.37	0.66	1.00	0.31	0.25
Channel Slope (ft/ft)	0.0211	0.0236	0.0125	0.0171	0.0208
Manning's Roughness Coefficient	0.03	0.05	0.013	0.03	0.06
Average Velocity - computed (ft/s)	3.72	3.48	12.81	2.95	1.42
Flow Length (ft)	5760.795	3717.648	1130.583	6137.448	4362
Channel Flow Tt (hr)	0.43	0.30	0.02	0.58	0.85
Watershed Time of travel (hr)	0.48	0.52	0.22	0.62	0.86
Watershed Lag Time (min)	17.37	18.77	7.77	22.28	30.92
Number of watersheds					1
MXD Path					Falcon_DBPS.mxd
Stored workbook					
\$AVHOME directory					
Name of the table to store the results of the calculation					Subbasin3
Workspace path					C:\GeoHMS\Falcon_DBPS_South\Falcon_DBPS_South.mdb

Falcon DBPS
Manning's n Values

Manning's n Description	Selected Value
Vegetated Roadside Ditch	0.03
Grass Swale	0.06
Channel - Sand	0.03
Channel - Grass	0.05
Channel - Willow	0.07
Floodplain - Grass	0.08
Floodplain - Willow	0.15

References:

- 1 Guide for Selecting Manning's Roughness Coefficients for Natural Channels and Floodplains, USGS Water Supply Paper 2339
- 2 City of Colorado Springs DCM
- 3 CDOT DCM
- 4 UDFCD DCM
- 5 Guide for Selecting Roughness Coefficient "n" Values For Channels, NRCS (SCS), 1963
- 6 Cottonwood Creek DBPS

Falcon DBPS
Routing Description

Reach	Length (ft)	Slope (ft/ft)	Manning's n	Invert (ft)	Shape	Diameter (ft)	Width (ft)	Side Slope (h:v)	L.B. Manning's n	R.B. Manning's n
RET020	3063.9	0.0186036	0.05	7113.75	Eight Point	--	--	--	0.08	0.08
RET030	5307.2	0.0146972	0.07	7019.43	Eight Point	--	--	--	0.08	0.08
RET040	1951	0.0194768	0.07	6958.54	Eight Point	--	--	--	0.15	0.15
RET050	1877.3	0.0207744	0.07	6938.26	Eight Point	--	--	--	0.08	0.08
RET060	1866	0.0117898	0.05	6896.01	Eight Point	--	--	--	0.08	0.08
RET070	2209.2	0.0185584	0.07	6868.86	Eight Point	--	--	--	0.08	0.08
RET080	1569.2	0.0044608	0.07	6855.75	Eight Point	--	--	--	0.15	0.15
RET090	378.7	0.0052812	0.07	6854.04	Eight Point	--	--	--	0.15	0.15
RET100	1916.5	0.0203494	0.03	6832.6	Eight Point	--	--	--	0.08	0.08
RET110	2956.5	0.0145443	0.03	6780.51	Eight Point	--	--	--	0.08	0.08
RET120	1474.5	0.0047475	0.03	6766.26	Eight Point	--	--	--	0.08	0.08
RET140	4052.5	0.0134575	0.03	6779.63	Eight Point	--	--	--	0.08	0.08
RET152	2217.2	0.0175895	0.03	6755.38	Eight Point	--	--	--	0.08	0.08
RET154	2358.2	0.0132409	0.05	6743.88	Eight Point	--	--	--	0.08	0.08
RET156	1006.8	0.0079457	0.03	6727.09	Eight Point	--	--	--	0.08	0.08
RET162	3410.6	0.0108486	0.05	6699.33	Eight Point	--	--	--	0.08	0.08
RET164	2094.9	0.0124114	0.03	6671.23	Eight Point	--	--	--	0.08	0.08
RMT030	3636.4	0.0202839	0.03	7033.46	Eight Point	--	--	--	0.08	0.08
RMT040	1310.1	0.0091599	0.03	6984	Eight Point	--	--	--	0.08	0.08
RMT050	1567.7	0.0191364	0.03	6965.39	Eight Point	--	--	--	0.08	0.08
RMT062	6001.9	0.0201602	0.05	6928.82	Eight Point	--	--	--	0.08	0.08
RMT064	3355.9	0.0160912	0.05	6911.23	Eight Point	--	--	--	0.08	0.08
RMT070	1118.3	0.0107303	0.05	6881.93	Eight Point	--	--	--	0.08	0.08
RMT080	2187.7	0.0118848	0.013		Rectangle	--	8	--		
RMT090	284.64	0.0105	0.013		Circle	3	--	--		
RMT102	1101.3	0.0208837	0.07	6840.11	Eight Point	--	--	--	0.15	0.15
RMT104	866.69	0.015	0.05	6846	Eight Point	--	--	--	0.08	0.08
RMT106	234.5	0.0042644	0.07	6831.79	Eight Point	--	--	--	0.15	0.15
RMT112	3556.1	0.0143416	0.07	6802.15	Eight Point	--	--	--	0.15	0.15
RMT114	1760.2	0.0170437	0.05	6758.55	Eight Point	--	--	--	0.08	0.08
RWT030	2078.5	0.0232	0.05	7392.86	Eight Point	--	--	--	0.08	0.08
RWT042	1561.2	0.0263708	0.05	7366.57	Eight Point	--	--	--	0.08	0.08
RWT044	2369.4	0.0291215	0.05	7367.84	Eight Point	--	--	--	0.08	0.08
RWT046	2587.6	0.0212553	0.05	7294.2	Eight Point	--	--	--	0.08	0.08
RWT054	2699.213562	0.021117	0.05	7267.87	Eight Point	--	--	--	0.08	0.08
RWT080	3461.5	0.0271559	0.05	7253.59	Eight Point	--	--	--	0.08	0.08
RWT092	651.99	0.0184053	0.03	7224.51	Eight Point	--	--	--	0.08	0.08
RWT094	2357.7	0.0114517	0.03	7190.23	Eight Point	--	--	--	0.08	0.08
RWT122	561.63	0.0124637	0.03	7184.96	Eight Point	--	--	--	0.08	0.08
RWT124	2423.9	0.0165024	0.03	7153.3	Eight Point	--	--	--	0.08	0.08
RWT150	2608	0.019	0.05	7174.97	Eight Point	--	--	--	0.08	0.08
RWT160	1565.7	0.0204375	0.05	7114.22	Eight Point	--	--	--	0.08	0.08
RWT172	3101.9	0.0190205	0.05	7114.4	Eight Point	--	--	--	0.08	0.08

Falcon DBPS
Routing Description

Reach	Length (ft)	Slope (ft/ft)	Manning's n	Invert (ft)	Shape	Diameter (ft)	Width (ft)	Side Slope (h:v)	L.B. Manning's n	R.B. Manning's n
RWT174	1869.6	0.0160463	0.05	7105.07	Eight Point	--	--	--	0.08	0.08
RWT176	326.42	0.0122541	0.03	7079.07	Eight Point	--	--	--	0.08	0.08
RWT180	3727.614345	0.0204	0.05	7015.13	Eight Point	--	--	--	0.08	0.08
RWT202	3011.790196	0.0212	0.05	6953.23	Eight Point	--	--	--	0.08	0.08
RWT204	3538.4	0.0218	0.05	6952	Eight Point	--	--	--	0.08	0.08
RWT210	2914.7	0.0133803	0.03	6906.35	Eight Point	--	--	--	0.08	0.08
RWT232	2180	0.0178898	0.05	6861.66	Eight Point	--	--	--	0.08	0.08
RWT234	2126.1	0.0201117	0.05	6860	Eight Point	--	--	--	0.08	0.08
RWT236	124.98	0.008	0.013		Rectangle		42		--	--
RWT240	1044	0.013	0.05	6837.41	Eight Point	--	--	--	0.08	0.08
RWT240_Diversion Reach	929	0.013	0.07	6826	Eight Point	--	--	--	0.15	0.15
RWT250	184.35	0.0054245	0.07	6818.14	Eight Point	--	--	--	0.15	0.15
RWT260	2371.1	0.015183	0.05	6800.68	Eight Point	--	--	--	0.08	0.08
RWT291	986.55	0.0223001	0.05	6780.96	Eight Point	--	--	--	0.08	0.08
RWT292	733.2	0.0165	0.05	6779.41	Eight Point	--	--	--	0.08	0.08
RWT294	536.02	0.0149	0.05	6772.93	Eight Point	--	--	--	0.08	0.08
RWT295	217	0.0091575	0.05	6763.06	Eight Point	--	--	--	0.08	0.08
RWT296	1202.594155	0.0091575	0.05	6763.06	Eight Point	--	--	--	0.08	0.08
RWT312	3295.8	0.0265	0.05	6731.53	Eight Point	--	--	--	0.08	0.08
RWT314	2428.7	0.0148227	0.05	6734.64	Eight Point	--	--	--	0.08	0.08
RWT320	2459.5	0.0093515	0.05	6692.49	Eight Point	--	--	--	0.08	0.08
RWT344	1380.563492	0.010865	0.03	6666	Eight Point	--	--	--	0.08	0.08
RWT352	3134.2	0.0121	0.05	6662.01	Eight Point	--	--	--	0.08	0.08
RWT354	14.142	0.0121	0.05	6658.11	Eight Point	--	--	--	0.08	0.08
RWT372	1466.3	0.0184133	0.07	6642.65	Eight Point	--	--	--	0.15	0.15
RWT374	2309.9	0.016	0.05	6659.99	Eight Point	--	--	--	0.08	0.08
RWT376	2601.5	0.0103788	0.05	6623.3	Eight Point	--	--	--	0.08	0.08

24-hr Rainfall Depths		
Recurrence Interval	NOAA Depth (in) ¹	Adjusted Depth (in)
2-yr	2	1.96
5-yr	2.6	2.55
10-yr	3	2.94
25-yr	3.8	3.72
50-yr	4.2	4.12
100-yr	4.6	4.51
Areal Reduction DA=10.6 mi ²		0.98


Notes:

¹ NOAA Atlas 2 Vol. III

Falcon DBPS

Typella Rainfall Distribution

Ordinate	Date/Time	Type IIa Cumulative						
		Precipitation (in)	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
1	01Jan2011, 00:00	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
2	01Jan2011, 00:15	0.0005	0.0010	0.0013	0.0015	0.0019	0.0021	0.0023
3	01Jan2011, 00:30	0.0015	0.0029	0.0038	0.0044	0.0056	0.0062	0.0068
4	01Jan2011, 00:45	0.0030	0.0059	0.0077	0.0088	0.0112	0.0124	0.0135
5	01Jan2011, 01:00	0.0045	0.0088	0.0115	0.0132	0.0167	0.0185	0.0203
6	01Jan2011, 01:15	0.0060	0.0118	0.0153	0.0176	0.0223	0.0247	0.0271
7	01Jan2011, 01:30	0.0080	0.0157	0.0204	0.0235	0.0298	0.0330	0.0361
8	01Jan2011, 01:45	0.0100	0.0196	0.0255	0.0294	0.0372	0.0412	0.0451
9	01Jan2011, 02:00	0.0120	0.0235	0.0306	0.0353	0.0446	0.0494	0.0541
10	01Jan2011, 02:15	0.0143	0.0280	0.0365	0.0420	0.0532	0.0589	0.0645
11	01Jan2011, 02:30	0.0165	0.0323	0.0421	0.0485	0.0614	0.0680	0.0744
12	01Jan2011, 02:45	0.0188	0.0368	0.0479	0.0553	0.0699	0.0775	0.0848
13	01Jan2011, 03:00	0.0210	0.0412	0.0536	0.0617	0.0781	0.0865	0.0947
14	01Jan2011, 03:15	0.0233	0.0457	0.0594	0.0685	0.0867	0.0960	0.1051
15	01Jan2011, 03:30	0.0255	0.0500	0.0650	0.0750	0.0949	0.1051	0.1150
16	01Jan2011, 03:45	0.0278	0.0545	0.0709	0.0817	0.1034	0.1145	0.1254
17	01Jan2011, 04:00	0.0320	0.0627	0.0816	0.0941	0.1190	0.1318	0.1443
18	01Jan2011, 04:15	0.0390	0.0764	0.0995	0.1147	0.1451	0.1607	0.1759
19	01Jan2011, 04:30	0.0460	0.0902	0.1173	0.1352	0.1711	0.1895	0.2075
20	01Jan2011, 04:45	0.0530	0.1039	0.1352	0.1558	0.1972	0.2184	0.2390
21	01Jan2011, 05:00	0.0600	0.1176	0.1530	0.1764	0.2232	0.2472	0.2706
22	01Jan2011, 05:15	0.0750	0.1470	0.1913	0.2205	0.2790	0.3090	0.3383
23	01Jan2011, 05:30	0.1000	0.1960	0.2550	0.2940	0.3720	0.4120	0.4510
24	01Jan2011, 05:45	0.4000	0.7840	1.0200	1.1760	1.4880	1.6480	1.8040
25	01Jan2011, 06:00	0.7000	1.3720	1.7850	2.0580	2.6040	2.8840	3.1570
26	01Jan2011, 06:15	0.7250	1.4210	1.8488	2.1315	2.6970	2.9870	3.2698
27	01Jan2011, 06:30	0.7500	1.4700	1.9125	2.2050	2.7900	3.0900	3.3825
28	01Jan2011, 06:45	0.7650	1.4994	1.9508	2.2491	2.8458	3.1518	3.4502
29	01Jan2011, 07:00	0.7800	1.5288	1.9890	2.2932	2.9016	3.2136	3.5178
30	01Jan2011, 07:15	0.7900	1.5484	2.0145	2.3226	2.9388	3.2548	3.5629
31	01Jan2011, 07:30	0.8000	1.5680	2.0400	2.3520	2.9760	3.2960	3.6080
32	01Jan2011, 07:45	0.8100	1.5876	2.0655	2.3814	3.0132	3.3372	3.6531
33	01Jan2011, 08:00	0.8200	1.6072	2.0910	2.4108	3.0504	3.3784	3.6982
34	01Jan2011, 08:15	0.8250	1.6170	2.1038	2.4255	3.0690	3.3990	3.7208
35	01Jan2011, 08:30	0.8300	1.6268	2.1165	2.4402	3.0876	3.4196	3.7433
36	01Jan2011, 08:45	0.8350	1.6366	2.1293	2.4549	3.1062	3.4402	3.7659
37	01Jan2011, 09:00	0.8400	1.6464	2.1420	2.4696	3.1248	3.4608	3.7884
38	01Jan2011, 09:15	0.8450	1.6562	2.1548	2.4843	3.1434	3.4814	3.8110
39	01Jan2011, 09:30	0.8500	1.6660	2.1675	2.4990	3.1620	3.5020	3.8335
40	01Jan2011, 09:45	0.8550	1.6758	2.1803	2.5137	3.1806	3.5226	3.8561
41	01Jan2011, 10:00	0.8600	1.6856	2.1930	2.5284	3.1992	3.5432	3.8786
42	01Jan2011, 10:15	0.8638	1.6930	2.2027	2.5396	3.2133	3.5589	3.8957
43	01Jan2011, 10:30	0.8675	1.7003	2.2121	2.5505	3.2271	3.5741	3.9124
44	01Jan2011, 10:45	0.8713	1.7077	2.2218	2.5616	3.2412	3.5898	3.9296
45	01Jan2011, 11:00	0.8750	1.7150	2.2313	2.5725	3.2550	3.6050	3.9463
46	01Jan2011, 11:15	0.8788	1.7224	2.2409	2.5837	3.2691	3.6207	3.9634
47	01Jan2011, 11:30	0.8825	1.7297	2.2504	2.5946	3.2829	3.6359	3.9801
48	01Jan2011, 11:45	0.8863	1.7371	2.2601	2.6057	3.2970	3.6516	3.9972
49	01Jan2011, 12:00	0.8900	1.7444	2.2695	2.6166	3.3108	3.6668	4.0139
50	01Jan2011, 12:15	0.8938	1.7518	2.2792	2.6278	3.3249	3.6825	4.0310
51	01Jan2011, 12:30	0.8975	1.7591	2.2886	2.6387	3.3387	3.6977	4.0477
52	01Jan2011, 12:45	0.9013	1.7665	2.2983	2.6498	3.3528	3.7134	4.0649
53	01Jan2011, 13:00	0.9050	1.7738	2.3078	2.6607	3.3666	3.7286	4.0816
54	01Jan2011, 13:15	0.9083	1.7803	2.3162	2.6704	3.3789	3.7422	4.0964
55	01Jan2011, 13:30	0.9115	1.7865	2.3243	2.6798	3.3908	3.7554	4.1109
56	01Jan2011, 13:45	0.9148	1.7930	2.3327	2.6895	3.4031	3.7690	4.1257
57	01Jan2011, 14:00	0.9180	1.7993	2.3409	2.6989	3.4150	3.7822	4.1402
58	01Jan2011, 14:15	0.9210	1.8052	2.3486	2.7077	3.4261	3.7945	4.1537
59	01Jan2011, 14:30	0.9240	1.8110	2.3562	2.7166	3.4373	3.8069	4.1672
60	01Jan2011, 14:45	0.9270	1.8169	2.3639	2.7254	3.4484	3.8192	4.1808
61	01Jan2011, 15:00	0.9300	1.8228	2.3715	2.7342	3.4596	3.8316	4.1943
62	01Jan2011, 15:15	0.9325	1.8277	2.3779	2.7416	3.4689	3.8419	4.2056
63	01Jan2011, 15:30	0.9350	1.8326	2.3843	2.7489	3.4782	3.8522	4.2169
64	01Jan2011, 15:45	0.9375	1.8375	2.3906	2.7563	3.4875	3.8625	4.2281
65	01Jan2011, 16:00	0.9400	1.8424	2.3970	2.7636	3.4968	3.8728	4.2394
66	01Jan2011, 16:15	0.9425	1.8473	2.4034	2.7710	3.5061	3.8831	4.2507
67	01Jan2011, 16:30	0.9450	1.8522	2.4098	2.7783	3.5154	3.8934	4.2620
68	01Jan2011, 16:45	0.9475	1.8571	2.4161	2.7857	3.5247	3.9037	4.2732
69	01Jan2011, 17:00	0.9500	1.8620	2.4225	2.7930	3.5340	3.9140	4.2845
70	01Jan2011, 17:15	0.9525	1.8669	2.4289	2.8004	3.5433	3.9243	4.2958
71	01Jan2011, 17:30	0.9550	1.8718	2.4353	2.8077	3.5526	3.9346	4.3071
72	01Jan2011, 17:45	0.9575	1.8767	2.4416	2.8151	3.5619	3.9449	4.3183
73	01Jan2011, 18:00	0.9600	1.8816	2.4480	2.8224	3.5712	3.9552	4.3296
74	01Jan2011, 18:15	0.9625	1.8865	2.4544	2.8298	3.5805	3.9655	4.3409
75	01Jan2011, 18:30	0.9650	1.8914	2.4608	2.8371	3.5898	3.9758	4.3522
76	01Jan2011, 18:45	0.9675	1.8963	2.4671	2.8445	3.5991	3.9861	4.3634
77	01Jan2011, 19:00	0.9700	1.9012	2.4735	2.8518	3.6084	3.9964	4.3747
78	01Jan2011, 19:15	0.9725	1.9061	2.4799	2.8592	3.6177	4.0067	4.3860
79	01Jan2011, 19:30	0.9750	1.9110	2.4863	2.8665	3.6270	4.0170	4.3973
80	01Jan2011, 19:45	0.9775	1.9159	2.4926	2.8739	3.6363	4.0273	4.4085
81	01Jan2011, 20:00	0.9800	1.9208	2.4990	2.8812	3.6456	4.0376	4.4198
82	01Jan2011, 20:15	0.9813	1.9233	2.5023	2.8850	3.6504	4.0430	4.4257
83	01Jan2011, 20:30	0.9825	1.9257	2.5054	2.8886	3.6549	4.0479	4.4311
84	01Jan2011, 20:45	0.9838	1.9282	2.5087	2.8924	3.6597	4.0533	4.4369
85	01Jan2011, 21:00	0.9850	1.9306	2.5118	2.8959	3.6642	4.0582	4.4424
86	01Jan2011, 21:15	0.9863	1.9331	2.5151	2.8997	3.6690	4.0636	4.4482
87	01Jan2011, 21:30	0.9875	1.9355	2.5181	2.9033	3.6735	4.0685	4.4536
88	01Jan2011, 21:45	0.9888	1.9380	2.5214	2.9071	3.6783	4.0739	4.4595
89	01Jan2011, 22:00	0.9900	1.9404	2.5245	2.9106	3.6828	4.0788	4.4649
90	01Jan2011, 22:15	0.9913	1.9429	2.5278	2.9144	3.6876	4.0842	4.4708
91	01Jan2011, 22:30	0.9925	1.9453	2.5309	2.9180	3.6921	4.0891	4.4762
92	01Jan2011, 22:45	0.9938	1.9478	2.5342	2.9218	3.6969	4.0945	4.4820
93	01Jan2011, 23:00	0.9950	1.9502	2.5373	2.9253	3.7014	4.0994	4.4875
94	01Jan2011, 23:15	0.9963	1.9527	2.5406	2.9291	3.7062	4.1048	4.4933
95	01Jan2011, 23:30	0.9975	1.9551	2.5436	2.9327	3.7107	4.1097	4.4987
96	01Jan2011, 23:45	0.9988	1.9576	2.5469	2.9365	3.7155	4.1151	4.5046
97	02Jan2011, 00:00	1.0000	1.9600	2.5500	2.9400	3.7200	4.1200	4.5100

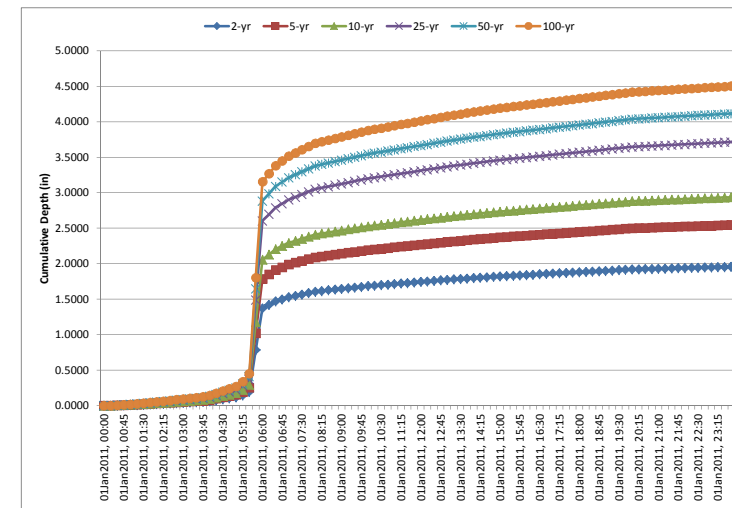

Falcon DBPS
Peak Flow Results

Hydrologic Element	Area (sq mi)	Historical Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
ET010	0.15	10	22	32	57	71	86
ET020	0.21	20	44	63	110	140	170
ET030	0.20	0	2	5	14	21	28
ET040	0.15	0	2	5	16	22	30
ET050	0.12	0	1	5	18	27	38
ET060	0.29	0	4	15	54	80	110
ET070	0.25	0	3	10	38	58	79
ET080	0.29	0	2	6	23	35	49
ET090	0.12	0	1	2	6	9	12
ET100	0.05	0	1	2	7	11	15
ET110	0.23	0	1	5	18	27	38
ET120	0.11	0	1	2	6	10	14
ET130	0.13	0	1	2	6	8	12
ET140	0.27	0	1	3	8	12	17
ET150	0.18	0	1	4	14	22	30
ET160	0.19	0	2	6	15	22	30
FS010	0.12	0	2	5	12	17	23
JET010	0.15	10	22	32	57	71	86
JET020	0.36	20	45	67	130	160	200
JET030	0.56	20	46	71	140	180	230
JET040	0.71	19	48	74	150	190	240
JET050	0.83	19	48	75	150	200	250
JET060	1.11	19	48	77	150	200	260
JET070	1.36	19	49	79	160	210	260
JET080	1.66	17	46	74	150	200	250
JET090	1.78	17	47	75	150	200	260
JET100	1.83	17	47	75	150	200	260
JET110	2.05	17	47	76	160	210	260
JET120	2.16	17	47	77	160	210	270
JET130	0.13	0	1	2	6	8	12
JET140	0.40	0	2	4	14	21	29
JET152	2.57	17	49	81	170	230	290
JET154	2.74	17	49	82	170	230	300
JET160	2.93	18	48	81	180	240	300
JFS010_OUTLET	0.12	0	2	5	12	17	23
JMT010	0.29	1	7	13	32	44	57
JMT020	0.09	8	20	30	54	68	83
JMT030	0.25	15	38	58	100	130	160
JMT040	0.56	24	65	99	180	230	290
JMT050	0.67	24	65	100	190	240	300
JMT060	1.16	24	66	100	200	260	330
JMT070	1.36	24	67	110	210	280	350
JMT080	1.42	24	68	110	210	280	350
JMT090	0.04	0	1	3	10	14	19
JMT102	1.46	24	68	110	220	280	360
JMT104	0.04	0	1	3	10	14	19
JMT106	1.52	24	68	110	210	280	360
JMT110	1.64	22	63	120	220	290	360
JWT010	0.14	7	18	27	51	65	80
JWT020	0.07	3	8	12	23	29	36
JWT030	0.14	6	15	23	46	60	75
JWT042	0.28	12	32	50	97	120	160
JWT044	0.46	19	49	77	150	190	240
JWT050	0.85	33	87	140	260	330	410
JWT070	0.17	10	27	42	77	99	120
JWT080	1.09	40	110	170	330	420	510
JWT090	1.43	49	120	200	380	500	610
JWT110	1.63	56	150	220	440	580	720
JWT120	1.77	58	150	230	460	600	750
JWT140	0.13	13	28	40	70	88	110
JWT150	0.36	21	44	64	110	140	170
JWT160	0.47	23	50	71	120	160	190
JWT172	2.24	79	200	300	580	750	930
JWT174	2.36	81	200	310	590	760	950
JWT180	2.46	81	200	310	600	770	960

Hydrologic Element	Area (sq mi)	Existing Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
ET010	0.15	25	47	64	100	130	150
ET020	0.21	44	84	110	180	220	260
ET030	0.20	34	62	84	130	160	190
ET040	0.15	28	53	72	120	140	170
ET050	0.12	37	67	89	140	170	200
ET060	0.29	110	190	250	380	450	530
ET070	0.25	94	160	220	330	400	460
ET080	0.29	91	160	210	320	380	440
ET090	0.12	7	16	24	41	52	63
ET100	0.05	1	6	10	21	27	34
ET110	0.23	8	24	38	73	94	120
ET120	0.11	8	18	26	46	57	70
ET130	0.13	7	16	23	41	51	62
ET140	0.27	11	23	34	59	73	89
ET150	0.18	17	37	53	91	110	140
ET160	0.19	19	39	55	92	110	140
FS010	0.12	2	6	11	24	32	41
JET010	0.15	23	37	49	80	99	120
JET020	0.36	44	85	120	190	240	280
JET030	0.56	65	130	190	310	380	460
JET040	0.71	23	59	110	260	390	480
JET050	0.83	7	32	67	170	260	410
JET060	1.11	13	28	45	180	240	340
JET070	1.36	94	170	220	350	420	490
JET080	1.66	14	36	55	170	230	320
JET090	1.78	15	39	64	170	270	370
JET100	1.83	15	40	65	170	270	380
JET110	2.05	16	43	76	180	300	410
JET120	2.16	17	48	84	190	320	430
JET130	0.13	7	16	23	41	51	62
JET140	0.40	18	39	57	99	120	150
JET152	2.57	28	86	140	290	430	570
JET154	2.74	31	91	140	300	450	590
JET160	2.93	32	96	150	320	470	620
JFS010_OUTLET	0.12	2	6	11	24	32	41
JMT010	0.29	1	11	25	62	120	160
JMT020	0.09	14	29	41	70	86	100
JMT030	0.25	34	74	100	160	200	240
JMT040	0.56	40	120	190	320	400	470
JMT050	0.67	50	150	230	390	490	580
JMT060	1.16	54	160	250	450	560	670
JMT070	1.36	61	180	280	510	630	760
JMT080	1.42	40	110	260	510	640	770
JMT090	0.04	8	13	16	23	27	30
JMT102	1.46	44	110	270	530	660	790
JMT104	0.04	8	13	16	23	27	30
JMT106	1.52	45	120	260	530	660	800
JMT110	1.64	46	120	260	540	680	820
JWT010	0.14	9	21	32	58	73	89
JWT020	0.07	4	10	15	27	34	42
JWT030	0.14	9	20	30	55	69	85
JWT042	0.28	15	37	57	110	140	170
JWT044	0.46	24	59	89	170	210	260
JWT050	0.85	43	110	170	310	390	480
JWT070	0.17	14	33	49	87	110	130
JWT080	1.09	54	140	210	400	500	610
JWT090	1.43	67	160	250	470	600	740
JWT110	1.63	76	180	280	540	700	850
JWT120	1.77	84	190	300	570	740	910
JWT140	0.13	14	30	43	74	92	110
JWT150	0.36	11	15	17	43	66	91
JWT160	0.47	35	64	85	130	160	180
JWT172	2.24	90	210	320	600	760	930
JWT174	2.36	92	210	320	610	780	960
JWT174 Diversion	2.36	0	15	130	410	580	760

Hydrologic Element	Area (sq mi)	Future Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
ET010	0.15	38	67	90	140	170	200
ET020	0.21	73	130	170	260	310	360
ET030	0.20	45	81	110	170	210	240
ET040	0.15	28	53	72	120	140	170
ET050	0.12	37	67	89	140	170	200
ET060	0.29	110	190	250	380	450	530
ET070	0.25	94	160	220	330	400	460
ET080	0.29	110	190	250	380	450	520
ET090	0.12	26	46	61	95	110	130
ET100	0.05	11	22	31	50	61	72
ET110	0.23	24	53	76	130	160	200
ET120	0.11	11	24	34	59	74	89
ET130	0.13	11	23	33	57	71	85
ET140	0.27	16	33	48	82	100	120
ET150	0.18	17	37	53	91	110	140
ET160	0.19	19	39	55	92	110	140
FS010	0.12	6	17	26	48	61	75
JET010	0.15	29	49	64	110	130	150
JET020	0.36	74	130	170	270	330	390
JET030	0.56	97	180	250	410	500	580
JET040	0.71	27	85	140	380	500	570
JET050	0.83	11	38	88	210	380	530
JET060	1.11	13	32	68	210	300	430
JET070	1.36	94	170	220	350	420	480
JET080	1.66	15	38	61	200	270	350
JET090	1.78	26	47	81	200	290	390
JET100	1.83	27	49	83	200	290	390
JET110	2.05	40	85	120	210	320	440
JET120	2.16	49	110	160	270	340	450
JET130	0.13	11	23	33	57	71	85
JET140	0.40	26	55	80	140	170	200
JET152	2.57	51	120	180	350	500	650
JET154	2.74	62	140	200	370	530	680
JET160	2.93	66	150	230	410	550	710
JFS010_OUTLET	0.12	6	17	26	48	61	75
JMT010	0.29	1	11	25	62	120	160
JMT020	0.09	26	47	64	100	120	140
JMT030	0.25	50	94	130	200	250	290
JMT040	0.56	110	240	330	520	620	750
JMT050	0.67	120	280	380	590	710	850
JMT060	1.16	130	310	430	700	850	1,000
JMT070	1.36	150	350	490	800	980	1,200
JMT080	1.42	86	330	490	810	980	1,200
JMT090	0.04	9	15	18	25	29	32
JMT102	1.46	91	330	500	820	1,000	1,200
JMT104	0.04	9	15	18	25	29	32
JMT106	1.52	92					

Falcon DBPS
Peak Flow Results

Hydrologic Element	Area (sq mi)	Historical Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
JWT190	0.06	0	0	2	7	10	14
JWT200	2.82	80	200	310	610	790	990
JWT210	3.09	80	200	320	620	810	1,000
JWT220	0.19	1	7	12	28	38	49
JWT232	3.28	81	210	320	630	830	1,000
JWT234	3.47	82	210	330	640	840	1,100
JWT240	3.55	83	210	330	650	840	1,100
JWT250	3.70	84	210	330	650	850	1,100
JWT260	3.84	86	220	340	670	870	1,100
JWT270	0.03	0	2	4	8	11	15
JWT280	0.27	22	50	72	130	160	190
JWT292	3.87	86	220	340	670	870	1,100
JWT294	4.13	89	220	350	690	900	1,100
JWT296	5.88	110	290	420	860	1,100	1,400
JWT300	0.10	6	14	22	39	50	61
JWT310	6.25	110	290	430	870	1,100	1,500
JWT320	6.46	110	290	430	880	1,100	1,500
JWT330	0.33	0	3	7	23	34	47
JWT352	9.69	110	300	460	970	1,300	1,600
JWT354	10.30	110	310	470	990	1,300	1,700
JWT360	0.07	1	3	5	11	15	20
JWT372	10.36	110	310	470	990	1,300	1,700
JWT374_OUTLET	10.58	110	310	470	990	1,300	1,700
MT010	0.29	1	7	13	32	44	57
MT020	0.09	8	20	30	54	68	83
MT030	0.16	7	20	32	61	78	97
MT040	0.31	10	28	43	82	110	130
MT050	0.12	0	1	2	7	11	16
MT060	0.19	0	1	4	14	22	31
MT070	0.20	0	2	5	13	19	25
MT080	0.06	2	8	14	29	38	48
MT090	0.04	0	1	3	10	14	19
MT100	0.06	0	0	1	5	8	11
MT110	0.12	0	1	2	8	12	16
RET020	0.15	10	22	32	57	71	82
RET030	0.36	19	44	67	120	160	200
RET040	0.56	19	46	71	140	180	230
RET050	0.71	19	47	74	150	190	240
RET060	0.83	19	47	75	150	190	250
RET070	1.11	19	48	77	150	200	250
RET080	1.36	17	45	72	140	190	240
RET090	1.66	17	46	74	150	200	250
RET100	1.78	17	47	75	150	200	260
RET110	1.83	17	47	75	150	200	260
RET120	2.05	17	47	76	160	210	260
RET140	0.13	0	1	2	6	8	12
RET152	2.16	17	47	77	160	210	270
RET154	0.40	0	2	4	14	21	29
RET156	2.57	17	49	81	170	230	290
RET162	2.74	17	48	80	170	230	300
RET164	2.93	18	48	81	180	240	300
RMT030	0.09	8	20	30	54	67	82
RMT040	0.25	14	38	57	100	130	160
RMT050	0.56	24	65	99	180	230	290
RMT062	0.29	1	7	13	31	44	57
RMT064	0.67	24	65	100	190	240	300
RMT070	1.16	24	66	100	200	260	330
RMT080	1.36	24	67	110	210	280	350
RMT090	0.04	0	1	3	10	14	19
RMT102	1.42	24	68	110	210	280	350
RMT104	0.04	0	1	3	10	14	19
RMT106	1.46	24	67	110	210	280	350
RMT112	1.52	22	62	120	210	280	360
RMT114	1.64	22	63	110	220	290	360
RWT030	0.07	3	8	12	23	29	36

Hydrologic Element	Area (sq mi)	Existing Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
JWT174 Diversion_OUTLET	0.00	92	200	200	200	200	200
JWT180	2.46	0	15	130	420	590	770
JWT190	0.06	4	7	12	26	35	43
JWT200	2.82	14	32	150	470	670	880
JWT210	3.09	21	50	170	510	720	950
JWT220	0.19	16	35	50	88	110	130
JWT232	3.28	27	64	180	530	750	990
JWT234	3.47	50	93	180	540	760	1,000
JWT240	3.55	26	54	86	410	670	890
JWT250	3.70	39	75	100	420	680	890
JWT260	3.84	47	92	130	420	690	910
JWT270	0.03	8	14	20	31	38	45
JWT280	0.27	33	70	100	170	210	250
JWT292	3.87	49	97	130	430	690	910
JWT294	4.13	71	140	200	440	700	930
JWT296	5.88	94	190	350	700	1,000	1,300
JWT300	0.10	12	26	36	62	76	92
JWT310	6.25	120	230	370	730	1,000	1,300
JWT320	6.46	120	250	370	740	1,000	1,300
JWT330	0.33	16	38	57	100	130	160
JWT352	9.69	160	320	520	1,000	1,400	1,900
JWT354	10.30	190	400	590	1,100	1,400	1,900
JWT360	0.07	7	15	21	37	46	55
JWT372	10.36	190	400	600	1,200	1,500	1,900
JWT374_OUTLET	10.58	190	400	600	1,200	1,500	1,900
MT010	0.29	28	58	82	140	170	210
MT020	0.09	14	29	41	70	86	100
MT030	0.16	30	59	82	130	160	190
MT040	0.31	34	70	100	170	210	250
MT050	0.12	17	33	46	76	92	110
MT060	0.19	8	21	33	62	80	99
MT070	0.20	10	23	34	61	77	93
MT080	0.06	58	86	110	140	170	190
MT090	0.04	36	54	67	94	110	120
MT100	0.06	11	22	30	49	59	70
MT110	0.12	19	36	50	81	99	120
Paint Brush Hills Pond #4	0.15	23	37	49	80	99	120
Paint Brush Hills Pond A	0.10	10	18	24	64	97	130
Paint Brush Hills Pond B1	0.36	23	46	70	120	150	170
Paint Brush Hills Pond B2	0.36	11	15	17	43	66	91
Paint Brush Hills Pond C	0.19	7	11	13	30	45	60
Regional Pond MN	1.42	40	110	260	510	640	770
Regional Pond WU Diversion	3.55	14	46	97	510	730	970
Regional Pond WU North	3.55	30	69	130	550	770	1,000
Regional Pond WU South	3.55	10	32	57	370	630	850
RET020	0.15	23	37	49	79	98	120
RET030	0.36	43	83	110	190	230	280
RET040	0.56	62	130	190	310	380	460
RET050	0.71	23	59	110	260	380	480
RET060	0.83	7	32	67	170	260	400
RET070	1.11	13	28	45	180	240	340
RET080	1.36	65	120	160	270	340	420
RET090	1.66	14	36	55	170	230	320
RET100	1.78	15	39	64	170	270	370
RET110	1.83	15	40	65	170	270	380
RET120	2.05	16	43	76	180	300	410
RET140	0.13	7	16	23	41	51	62
RET152	2.16	17	48	84	190	320	430
RET154	0.40	18	39	57	99	120	150
RET156	2.57	28	86	140	290	430	570
RET162	2.74	30	91	140	300	450	590
RET164	2.93	32	96	150	310	470	620
RMT030	0.09	14	29	41	69	85	100
RMT040	0.25	33	73	100	160	200	240
RMT050	0.56	40	120	190	320	400	470

Hydrologic Element	Area (sq mi)	Future Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
JWT190	0.06	4	7	12	26	35	43
JWT200	2.82	110	230	360	690	890	1,200
JWT210	3.09	120	250	400	760	990	1,300
JWT220	0.19	47	85	110	180	210	250
JWT232	3.28	120	260	410	790	1,000	1,400
JWT234	3.47	130	270	420	810	1,000	1,400
JWT240	3.55	83	200	380	770	940	1,100
JWT250	3.70	85	210	390	780	950	1,100
JWT260	3.84	86	210	390	790	970	1,100
JWT270	0.03	11	20	27	41	49	57
JWT280	0.27	33	70	100	170	210	250
JWT292	3.87	86	210	390	790	970	1,100
JWT294	4.13	96	210	400	800	990	1,100
JWT296	5.88	160	410	620	1,100	1,400	1,700
JWT300	0.10	12	26	36	62	76	92
JWT310	6.25	160	420	640	1,100	1,400	1,700
JWT320	6.46	160	410	630	1,100	1,400	1,700
JWT330	0.33	32	68	98	170	210	250
JWT352	9.69	210	530	820	1,400	2,000	2,400
JWT354	10.30	230	560	870	1,500	2,000	2,500
JWT360	0.07	7	15	21	37	46	55
JWT372	10.36	230	560	860	1,500	2,000	2,500
JWT374_OUTLET	10.58	230	560	860	1,500	2,000	2,500
MT010	0.29	28	58	82	140	170	210
MT020	0.09	26	47	64	100	120	140
MT030	0.16	39	73	100	160	190	230
MT040	0.31	95	160	220	330	390	460
MT050	0.12	17	33	46	76	92	110
MT060	0.19	30	59	83	140	170	200
MT070	0.20	25	50	69	110	140	170
MT080	0.06	62	92	110	150	170	190
MT090	0.04	40	59	73	100	110	130
MT100	0.06	17	30	40	63	75	88
MT110	0.12	19	36	50	81	99	120
Paint Brush Hills Pond #4	0.15	29	49	64	110	130	150
Paint Brush Hills Pond A	0.10	10	18	24	64	97	130
Paint Brush Hills Pond B1	0.36	51	100	140	190	210	270
Paint Brush Hills Pond B2	0.36	15	19	39	97	140	170
Paint Brush Hills Pond C	0.19	11	14	23	56	74	160
Regional Pond MN	1.42	86	330	490	810	980	1,200
Regional Pond WU Diversion	3.55	83	230	380	770	1,000	1,300
Regional Pond WU North	3.55	110	270	420	810	1,100	1,400
Regional Pond WU South	3.55	55					

Falcon DBPS
Peak Flow Results

Hydrologic Element	Area (sq mi)	Historical Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
RWT042	0.14	6	15	23	46	60	75
RWT044	0.14	7	18	27	51	65	80
RWT046	0.28	12	32	50	97	120	150
RWT054	0.46	18	49	77	150	190	240
RWT080	0.17	10	27	42	77	98	120
RWT092	0.85	33	87	140	260	330	410
RWT094	1.09	40	110	170	330	420	510
RWT122	1.43	48	120	200	380	500	610
RWT124	1.63	56	140	220	440	580	720
RWT150	0.13	13	28	40	70	87	110
RWT160	0.36	21	44	64	110	140	170
RWT172	1.77	58	150	230	460	600	750
RWT174	0.47	23	49	71	120	160	190
RWT176	2.24	79	200	300	580	750	930
RWT180	2.36	81	200	310	590	760	950
RWT202	2.46	80	200	310	600	770	960
RWT204	0.06	0	0	2	7	10	14
RWT210	2.82	80	200	310	610	790	990
RWT232	3.09	80	200	320	620	810	1,000
RWT234	0.19	1	7	12	28	38	49
RWT236	3.28	81	210	320	630	830	1,000
RWT240	3.47	82	210	330	640	840	1,100
RWT250	3.55	83	210	330	650	840	1,100
RWT260	3.70	84	210	330	650	850	1,100
RWT291	3.84	86	220	340	670	870	1,100
RWT292	0.03	0	2	4	8	11	15
RWT294	0.27	22	50	72	130	160	190
RWT295	3.87	86	220	340	670	870	1,100
RWT296	4.13	88	220	350	680	890	1,100
RWT312	0.10	6	14	22	39	49	60
RWT314	5.88	110	290	420	860	1,100	1,400
RWT320	6.25	110	290	430	870	1,100	1,500
RWT344	0.33	0	3	7	23	34	47
RWT352	6.46	110	290	430	870	1,100	1,500
RWT354	9.69	110	300	460	970	1,300	1,600
RWT372	10.30	110	310	470	990	1,300	1,700
RWT374	0.07	1	3	5	11	15	20
RWT376	10.36	190	400	600	1,100	1,500	1,900
WT010	0.14	7	18	27	51	65	80
WT020	0.07	3	8	12	23	29	36
WT030	0.08	6	14	21	38	48	59
WT040	0.19	7	18	28	53	68	83
WT050	0.19	14	32	47	83	100	130
WT060	0.20	9	21	31	55	70	85
WT070	0.17	10	27	42	77	99	120
WT080	0.07	7	16	23	41	51	62
WT090	0.15	15	33	48	83	100	130
WT100	0.19	25	55	78	130	170	200
WT110	0.19	13	30	45	79	100	120
WT120	0.05	0	1	2	8	11	15
WT130	0.10	11	25	37	64	80	97
WT140	0.13	13	28	40	70	88	110
WT150	0.23	11	24	35	61	77	93
WT160	0.11	17	36	51	86	110	130
WT170	0.12	7	18	28	52	67	82
WT180	0.10	0	1	2	6	9	12
WT190	0.06	0	0	2	7	10	14
WT200	0.30	0	1	4	12	18	25
WT210	0.27	0	2	4	11	16	21
WT220	0.19	1	7	12	28	38	49
WT230	0.20	5	18	29	60	79	99
WT240	0.08	9	20	29	52	64	78
WT250	0.15	7	22	35	68	88	110
WT260	0.14	6	13	19	33	42	51
WT270	0.03	0	2	4	8	11	15

Hydrologic Element	Area (sq mi)	Existing Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
RMT062	0.29	1	11	25	62	110	160
RMT064	0.67	50	140	230	390	490	580
RMT070	1.16	54	150	250	440	560	670
RMT080	1.36	61	180	280	500	630	760
RMT090	0.04	8	13	16	23	27	30
RMT102	1.42	40	110	260	510	640	770
RMT104	0.04	8	13	16	23	27	30
RMT106	1.46	44	110	250	520	650	780
RMT112	1.52	44	120	250	520	650	790
RMT114	1.64	46	120	260	540	670	820
RWT030	0.07	4	10	15	27	34	42
RWT042	0.14	9	20	30	54	69	85
RWT044	0.14	9	21	32	57	73	89
RWT046	0.28	15	37	57	110	140	170
RWT054	0.46	24	59	89	170	210	260
RWT080	0.17	14	33	48	87	110	130
RWT092	0.85	43	110	170	310	390	480
RWT094	1.09	54	140	210	400	500	610
RWT122	1.43	66	160	250	470	600	740
RWT124	1.63	76	180	280	540	700	850
RWT150	0.13	14	30	43	74	92	110
RWT160	0.36	11	15	17	43	66	91
RWT172	1.77	84	190	300	570	730	900
RWT174	0.47	35	62	84	130	160	180
RWT176	2.24	90	210	320	600	760	930
RWT180	2.36	0	14	130	410	580	760
RWT202	2.46	0	14	130	420	590	770
RWT204	0.06	4	7	12	26	34	43
RWT210	2.82	14	32	150	470	670	880
RWT232	3.09	20	50	170	510	720	950
RWT234	0.19	16	35	50	88	110	130
RWT236	3.28	27	64	180	530	750	990
RWT240	3.47	50	93	180	540	760	1,000
RWT240_Diversion Reach	0.00	16	23	31	38	38	39
RWT250	3.55	26	54	86	410	670	880
RWT260	3.70	38	73	100	410	670	890
RWT291	3.84	46	91	130	420	690	910
RWT292	0.03	8	14	19	31	38	45
RWT294	0.27	33	70	100	170	210	250
RWT295	3.87	49	97	130	430	690	910
RWT296	4.13	70	140	200	440	700	920
RWT312	0.10	12	25	36	61	76	91
RWT314	5.88	93	190	350	700	1,000	1,300
RWT320	6.25	120	230	360	720	1,000	1,300
RWT344	0.33	16	38	57	100	130	160
RWT352	6.46	120	240	360	730	1,000	1,300
RWT354	9.69	160	320	520	1,000	1,400	1,900
RWT372	10.30	190	400	590	1,100	1,400	1,900
RWT374	0.07	7	15	21	36	45	55
RWT376	10.36	190	400	600	1,100	1,500	1,900
The Meadows Pond #1	0.06	4	7	12	26	35	43
The Meadows Pond #2	0.29	1	11	25	62	120	160
Woodmen Hills Pond #1 North	0.71	59	130	190	320	400	480
Woodmen Hills Pond #1 South	0.71	23	59	110	260	390	480
Woodmen Hills Pond #2	0.83	7	32	67	170	260	410
Woodmen Hills Pond #3	1.11	13	28	45	180	240	340
Woodmen Hills Pond #4	1.66	14	36	55	170	230	320
Woodmen Hills Pond #5	0.04	8	13	16	23	27	30
Woodmen Hills Pond H	0.56	40	120	190	320	400	470
WT010	0.14	9	21	32	58	73	89
WT020	0.07	4	10	15	27	34	42
WT030	0.08	9	20	29	50	62	75
WT040	0.19	9	22	33	60	76	93
WT050	0.19	17	37	54	93	120	140
WT060	0.20	14	30	44	77	96	120

Hydrologic Element	Area (sq mi)	Future Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
RMT070	1.16	130	310	430	690	840	1,000
RMT080	1.36	150	350	490	800	980	1,200
RMT090	0.04	9	15	18	25	29	32
RMT102	1.42	86	320	490	800	980	1,200
RMT104	0.04	9	15	18	25	29	32
RMT106	1.46	91	320	490	810	990	1,200
RMT112	1.52	92	310	490	810	990	1,200
RMT114	1.64	94	320	500	830	1,000	1,200
RWT030	0.07	4	10	15	27	34	42
RWT042	0.14	9	20	30	54	69	85
RWT044	0.14	9	21	32	57	73	89
RWT046	0.28	15	37	57	110	140	170
RWT054	0.46	24	59	89	170	210	260
RWT080	0.17	14	33	48	87	110	130
RWT092	0.85	43	110	170	310	390	480
RWT094	1.09	54	140	210	400	500	610
RWT122	1.43	68	160	250	480	610	730
RWT124	1.63	77	170	280	530	690	840
RWT150	0.13	32	59	79	130	150	180
RWT160	0.36	15	19	39	97	140	170
RWT172	1.77	85	190	300	570	730	920
RWT174	0.47	35	63	84	130	160	180
RWT176	2.24	98	210	320	600	760	960
RWT180	2.36	100	210	330	610	780	990
RWT202	2.46	100	220	330	620	800	1,000
RWT204	0.06	4	7	12	26	34	43
RWT210	2.82	110	230	360	690	890	1,200
RWT232	3.09	120	250	400	760	990	1,300
RWT234	0.19	47	84	110	180	210	250
RWT236	3.28	120	260	410	790	1,000	1,400
RWT240	3.47	130	270	420	810	1,000	1,400
RWT240_Diversion Reach	0.00	30	37	38	38	39	39
RWT250	3.55	83	200	380	770	940	1,100
RWT260	3.70	85	210	380	780	950	1,100
RWT291	3.84	86	210	390	790	970	1,100
RWT292	0.03	11	20	26	41	49	57
RWT294	0.27	33	70	100	170	210	250
RWT295	3.87	86	210	390	790	970	1,100
RWT296	4.13	94	210	400	800	990	1,100
RWT312	0.10	12	25	36	61	76	91
RWT314	5.88	160	400	620	1,100	1,400	1,700
RWT320	6.25	160	400	620	1,100	1,400	1,700
RWT344	0.33	32	68	97	170	210	250
RWT352	6.46	160	400	6			

Falcon DBPS
Peak Flow Results

Hydrologic Element	Area (sq mi)	Historical Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
WT280	0.27	22	50	72	130	160	190
WT290	0.10	3	11	19	38	50	62
WT300	0.10	6	14	22	39	50	61
WT310	0.28	2	8	16	37	51	67
WT320	0.21	0	2	6	17	26	35
WT330	0.33	0	3	7	23	34	47
WT340	0.28	0	3	6	17	25	34
WT350	0.30	3	12	21	45	61	78
WT360	0.07	1	3	5	11	15	20
WT370	0.21	0	2	5	16	24	33

Hydrologic Element	Area (sq mi)	Existing Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
WT070	0.17	14	33	49	87	110	130
WT080	0.07	9	19	27	45	56	67
WT090	0.15	17	36	51	88	110	130
WT100	0.19	28	59	83	140	170	210
WT110	0.19	15	33	48	84	110	130
WT120	0.05	2	6	10	19	25	31
WT130	0.10	35	61	81	120	150	170
WT140	0.13	14	30	43	74	92	110
WT150	0.23	20	40	56	95	120	140
WT160	0.11	35	64	85	130	160	180
WT170	0.12	10	23	35	62	79	96
WT180	0.10	0	1	3	7	11	15
WT190	0.06	11	23	31	51	63	75
WT200	0.30	10	25	37	69	87	110
WT210	0.27	7	18	27	51	65	80
WT220	0.19	16	35	50	88	110	130
WT230	0.20	50	92	120	200	240	280
WT240	0.08	28	49	65	100	120	140
WT250	0.15	39	72	98	160	190	220
WT260	0.14	10	21	30	52	64	78
WT270	0.03	8	14	20	31	38	45
WT280	0.27	33	70	100	170	210	250
WT290	0.10	15	31	44	75	92	110
WT300	0.10	12	26	36	62	76	92
WT310	0.28	20	47	68	120	150	180
WT320	0.21	18	40	58	100	130	150
WT330	0.33	16	38	57	100	130	160
WT340	0.28	19	40	57	98	120	150
WT350	0.30	26	55	80	140	170	210
WT360	0.07	7	15	21	37	46	55
WT370	0.21	1	7	14	35	49	64

Hydrologic Element	Area (sq mi)	Future Peak Flows (cfs)					
		2-year	5-year	10-year	25-year	50-year	100-year
WT090	0.15	22	46	65	110	140	160
WT100	0.19	56	100	140	210	260	300
WT110	0.19	22	47	67	110	140	170
WT120	0.05	2	6	10	19	25	31
WT130	0.10	35	61	81	120	150	170
WT140	0.13	32	59	80	130	150	180
WT150	0.23	49	86	110	180	210	250
WT160	0.11	35	64	85	130	160	180
WT170	0.12	21	43	60	99	120	140
WT180	0.10	8	17	25	43	54	66
WT190	0.06	11	23	31	51	63	75
WT200	0.30	25	52	74	130	160	190
WT210	0.27	32	60	81	130	160	190
WT220	0.19	47	85	110	180	210	250
WT230	0.20	71	120	160	250	300	350
WT240	0.08	36	61	79	120	140	160
WT250	0.15	63	110	140	210	250	290
WT260	0.14	10	21	30	52	64	78
WT270	0.03	11	20	27	41	49	57
WT280	0.27	33	70	100	170	210	250
WT290	0.10	15	31	44	75	92	110
WT300	0.10	12	26	36	62	76	92
WT310	0.28	31	67	96	170	210	250
WT320	0.21	27	56	80	140	170	200
WT330	0.33	32	68	98	170	210	250
WT340	0.28	19	40	57	98	120	150
WT350	0.30	38	79	110	190	230	280
WT360	0.07	7	15	21	37	46	55
WT370	0.21	7	23	38	76	99	120

Sig Figs (<10cfs) 1
Sig Figs (>10cfs) 2

APPENDIX E: DRAINAGE MAPS



K:\COS_Civil\196288000_Eagleview\CADD\Exhibits\Drainage Analysis\196288000_EX_DRN.dwg Morey, Doug 8/1/2022 10:49 AM



LEGEND

- DRAINAGE BASIN AREAS
- A - HEC-HMS BASINS
 - B - BASIN ACREAGE
 - C - 5-YR RUNOFF
 - D - 100-YR RUNOFF
- DESIGN POINT
- EXISTING CONTOURS
- PROPERTY BOUNDARY
- FLOW ARROW
- FLOW PATH
- PARCEL LINE

HEC-HMS - EXISTING RUNOFF TABLE						
DESIGN POINT	BASIN DESIGNATION	BASIN AREA (ACRES)	DIRECT 5-YR RUNOFF (CFS)	DIRECT 100-YR RUNOFF (CFS)	CUMULATIVE DIRECT 5-YR RUNOFF (CFS)	CUMULATIVE DIRECT 100-YR RUNOFF (CFS)
	B1	5.55	3.0	8.5	-	-
J1	OB1	10.37	7.1	18.8	10.1	27.3
	B2	41.43	15.4	48.5	-	-
	OB2	28.06	20.6	52.7	-	-
	OB3	43.44	25.3	67.1	-	-
J2	OB4	10.50	7.5	18.9	67.5	183.8
	OB5	143.82	36.8	106.9	-	-
	OB6	118.40	40.8	113.2	-	-
J4	OB7	421.43	101.4	284.2	169.2	478.0
	B3	59.54	36.4	110.0	-	-
	B4	14.68	5.4	18.2	-	-
J3	OB8	33.07	19.5	51.6	183.1	515.5



Kimley»Horn

2022 KIMLEY-HORN AND ASSOCIATES, INC.
2 North Nevada Avenue Suite 300
Colorado Springs, Colorado 80903 (719) 453-0180

DESIGNED BY: MK
DRAWN BY: RS
CHECKED BY: KK
DATE: 04/08/2022

EAGLEVIEW
EL PASO COUNTY, COLORADO
PRE DEVELOPMENT DRAINAGE MAP

PRELIMINARY
FOR REVIEW ONLY
NOT FOR
CONSTRUCTION
Kimley»Horn
Kimley-Horn and Associates, Inc.


PROJECT NO.
196288000

SHEET

1

NO.	REVISION	BY	DATE	APPR.

K:\COS_Civil\196288000_Eagleview\CADD\Exhibits\Drainage Analysis\196288000_EX_DRN.dwg Kofford, Kevin 8/11/2022 3:16 PM


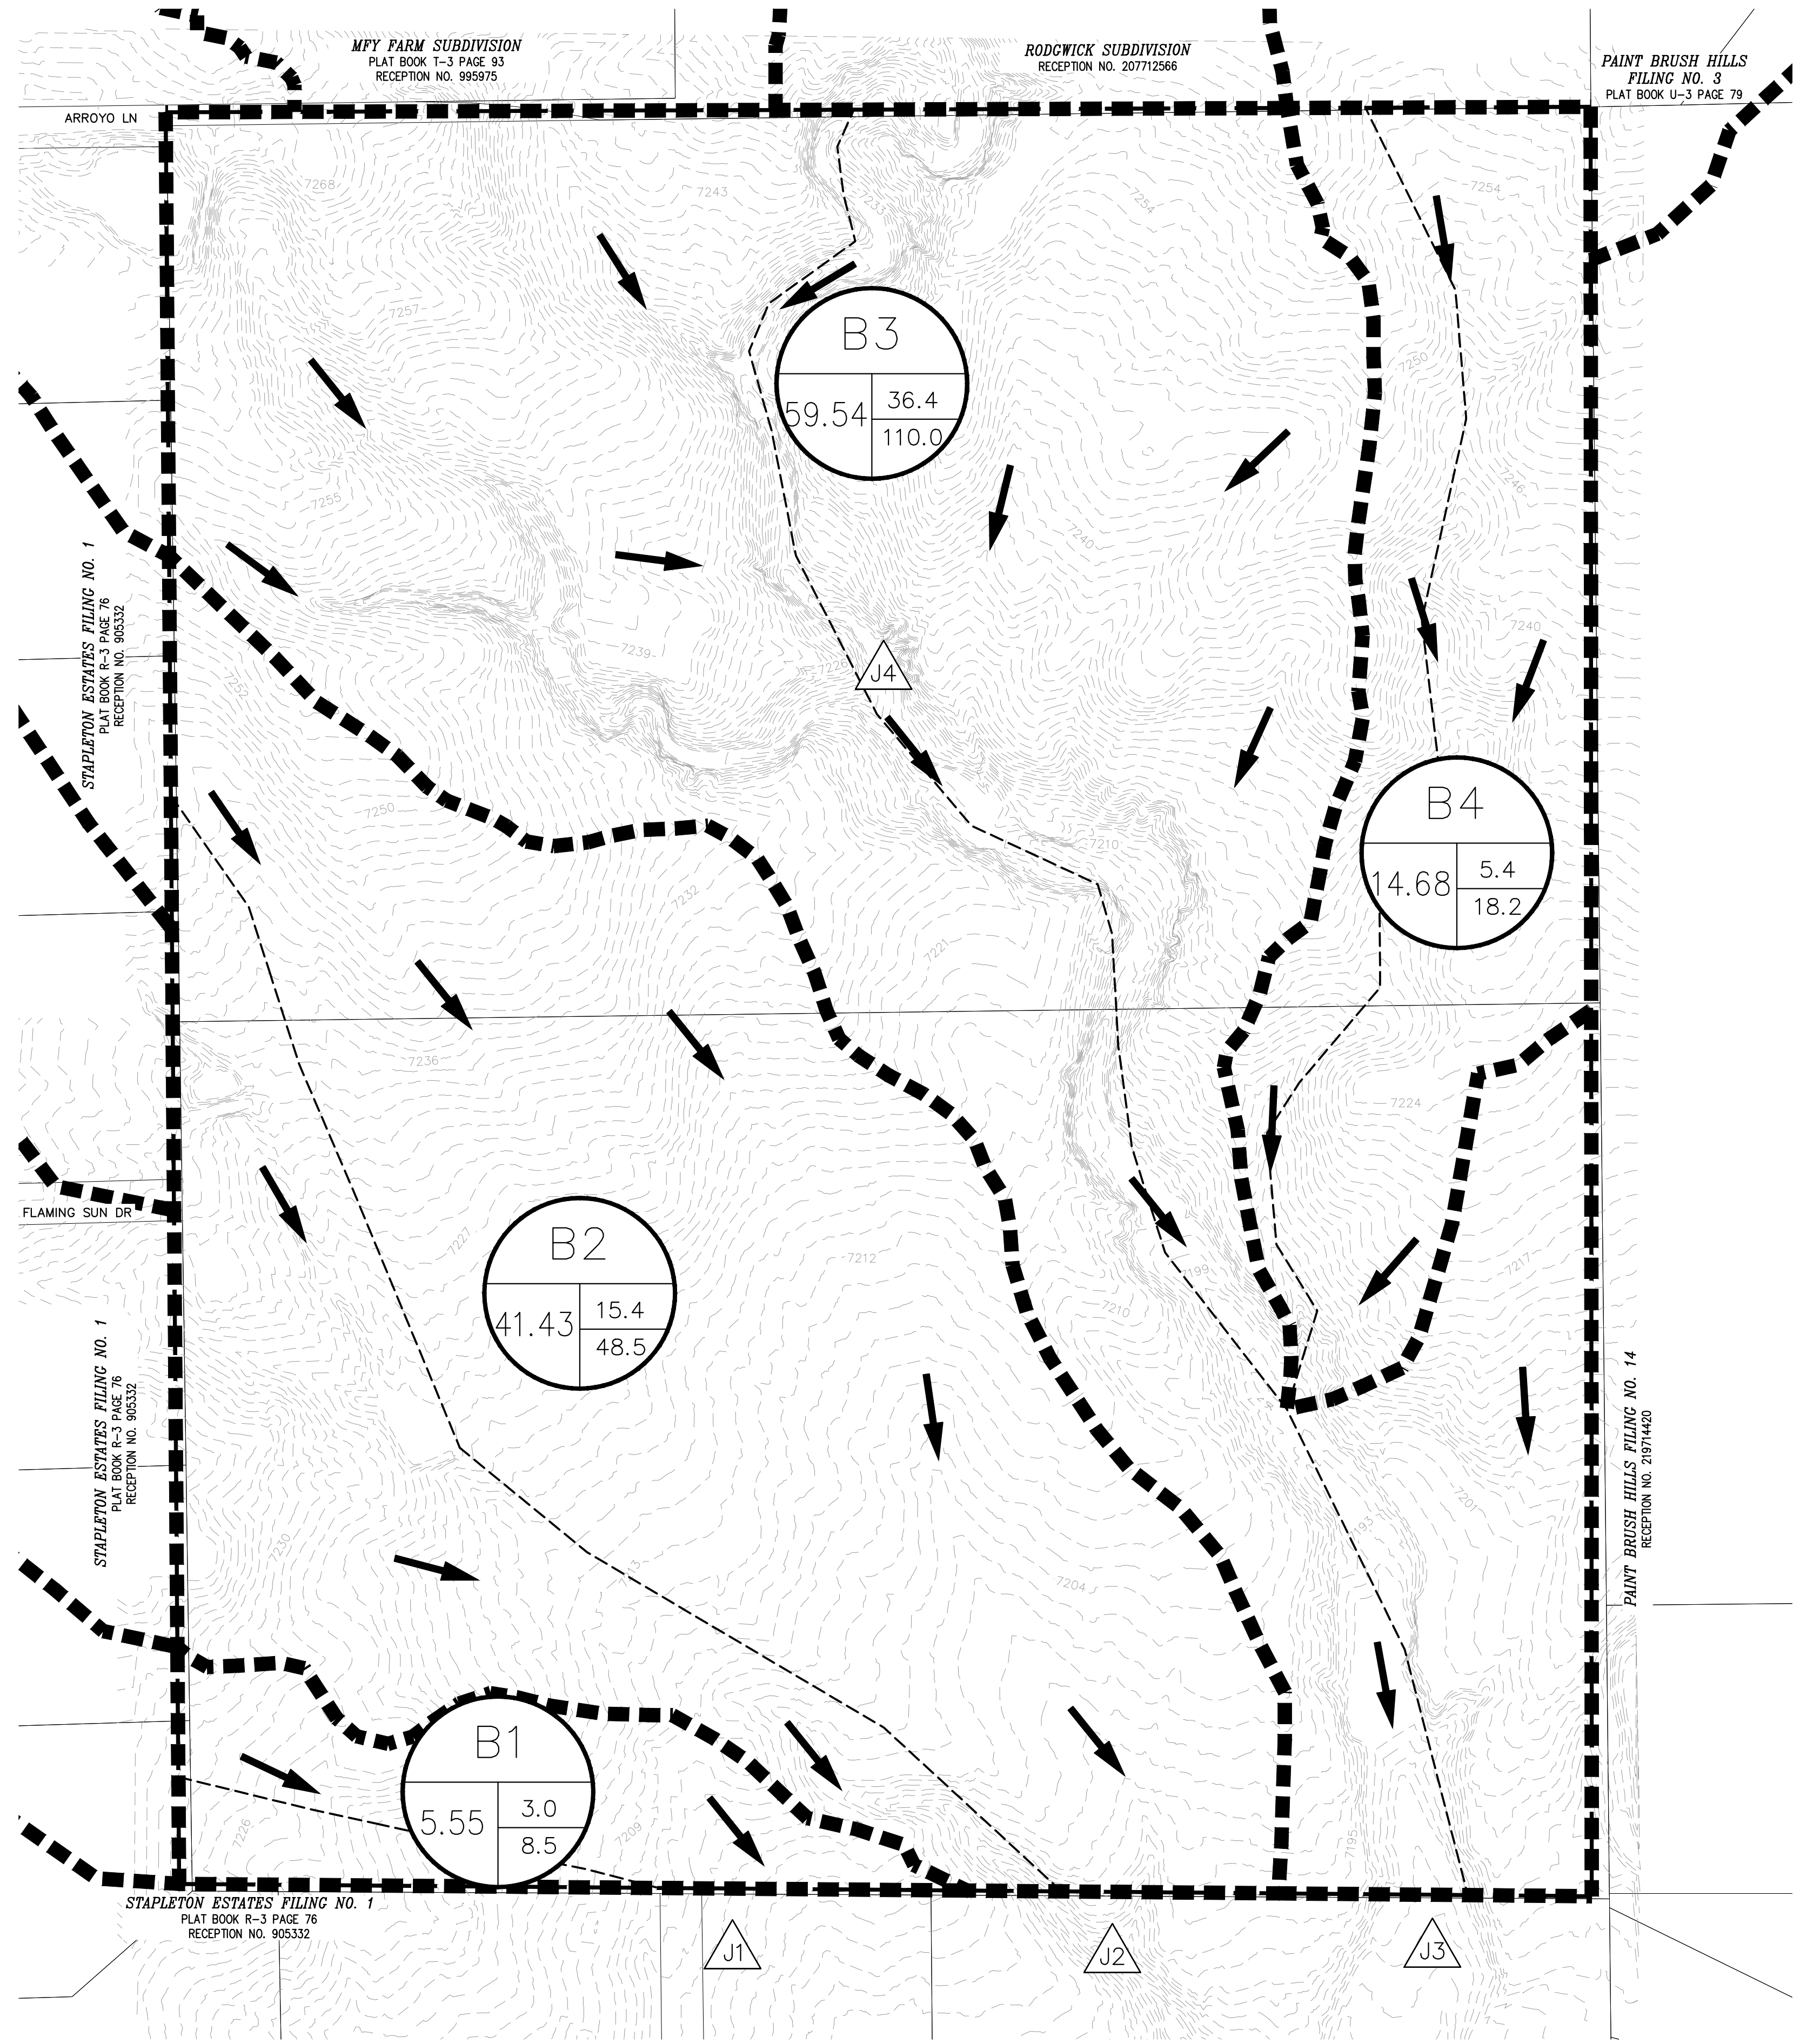


LEGEND

- DRAINAGE BASIN AREAS
- A - HEC-HMS BASINS
B - BASIN ACREAGE
C - 5-YR RUNOFF
D - 100-YR RUNOFF
- DESIGN POINT
- EXISTING CONTOURS
- PROPERTY BOUNDARY
- FLOW ARROW
- FLOW PATH

HEC-HMS - EXISTING RUNOFF TABLE

DESIGN POINT	BASIN DESIGNATION	BASIN AREA (ACRES)	DIRECT 5-YR RUNOFF (CFS)	DIRECT 100-YR RUNOFF (CFS)	CUMULATIVE DIRECT 5-YR RUNOFF (CFS)	CUMULATIVE DIRECT 100-YR RUNOFF (CFS)
	B1	5.55	3.0	8.5	-	-
J1	OB1	10.37	7.1	18.8	10.1	27.3
	B2	41.43	15.4	48.5	-	-
	OB2	28.06	20.6	52.7	-	-
	OB3	43.44	25.3	67.1	-	-
J2	OB4	10.50	7.5	18.9	67.5	183.8
	OB5	143.82	36.8	106.9	-	-
	OB6	118.40	40.8	113.2	-	-
J4	OB7	421.43	101.4	284.2	169.2	478.0
	B3	59.54	36.4	110.0	-	-
	B4	14.68	5.4	18.2	-	-
J3	OB8	33.07	19.5	51.6	183.1	515.5



Kimley»Horn
 2022 KIMLEY-HORN AND ASSOCIATES, INC.
 2 North Nevada Avenue Suite 300
 Colorado Springs, Colorado 80903 (719) 453-0180

DESIGNED BY: MK
 DRAWN BY: RS
 CHECKED BY: KK
 DATE: 04/08/2022


EAGLEVIEW
 EL PASO COUNTY, COLORADO
 PRE DEVELOPMENT DRAINAGE MAP

PRELIMINARY
 FOR REVIEW ONLY
 NOT FOR
 CONSTRUCTION
Kimley»Horn
 Kimley-Horn and Associates, Inc.

PROJECT NO.
 196288000

SHEET
2

NO.	REVISION	BY	DATE	APPR.

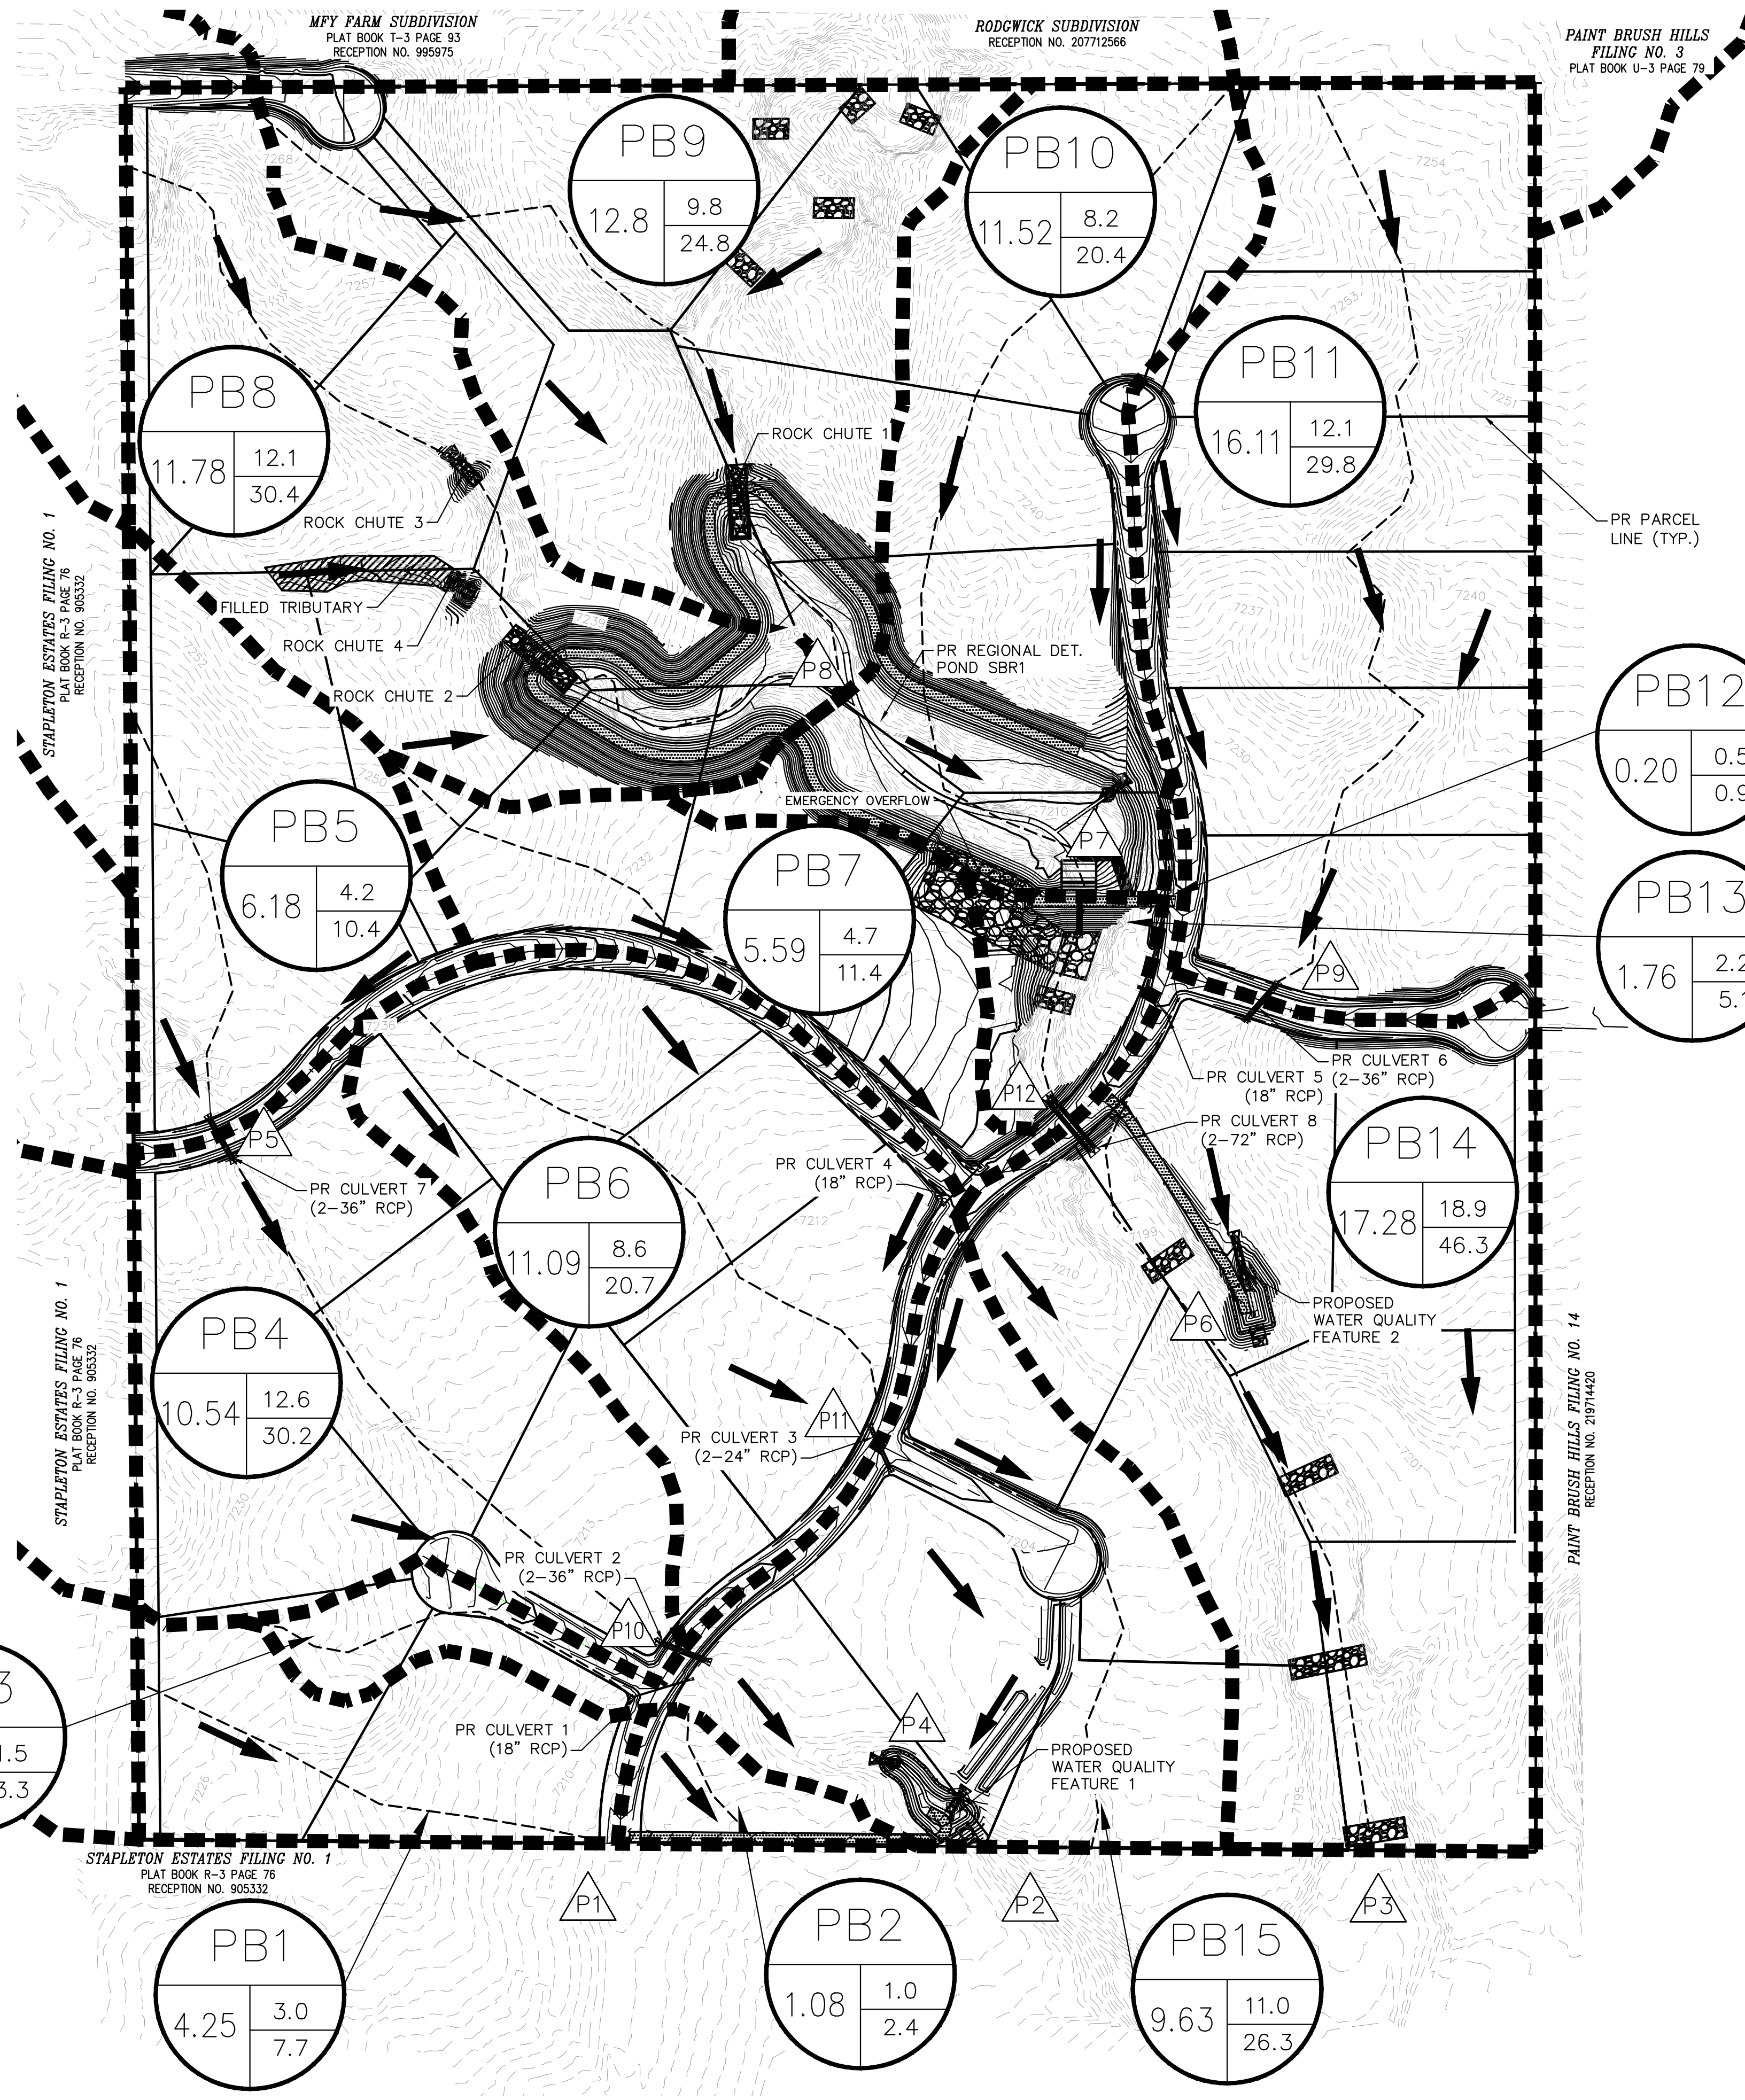

LEGEND

- DRAINAGE BASIN AREAS
- A - HEC-HMS BASINS
B - BASIN ACREAGE
C - 5-YR RUNOFF
D - 100-YR RUNOFF
- DESIGN POINT
- EXISTING CONTOURS
- PROPOSED CONTOURS
- PROPERTY BOUNDARY
- FLOW ARROW
- FLOW PATH
- DROP STRUCTURE


HEC-HMS - DEVELOPED RUNOFF BASIN TABLE

BASIN DESIGNATION	BASIN AREA (ACRES)	DIRECT 5-YR RUNOFF (CFS)	DIRECT 100-YR RUNOFF (CFS)
OB1	10.37	7.1	18.8
OB2	28.06	20.6	52.7
OB3	43.44	25.3	67.1
OB4	10.50	7.5	18.9
OB5	143.82	36.8	106.9
OB6	118.40	42.1	114.9
OB7	421.43	101.4	284.3
OB8	33.07	19.0	51.0
PB1	4.25	3.0	7.7
PB2	1.08	1.0	2.4
PB3	1.38	1.5	3.3
PB4	10.54	12.6	30.2
PB5	6.18	4.2	10.4
PB6	11.09	8.6	20.7
PB7	5.59	4.7	11.4
PB8	11.78	12.1	30.4
PB9	12.8	9.8	24.8
PB10	11.52	8.2	20.4
PB11	16.11	12.1	29.8
PB12	0.20	0.5	0.9
PB13	1.76	2.2	5.1
PB14	17.28	18.9	46.3
PB15	9.63	11.0	26.3

HEC-HMS - DEVELOPED RUNOFF DESIGN POINT TABLE


DESIGN POINT	TRIBUTARY BASINS	TRIBUTARY AREA (ACRES)	CUMULATIVE 5-YR FLOW (CFS)	CUMULATIVE 100-YR FLOW (CFS)
P1	OB1, PB1	14.62	10.1	26.4
P2	OB2, OB3, OB4, PB3, PB4, PB5, PB6, PB7, PB15	126.42	74.1	189.1
P3	OB5, OB6, OB7, OB8, OB8, PB9, PB10, PB11, PB12, PB13, PB14	787.97	131.8	437.7
P4	OB2, OB3, OB4, PB3, PB4, PB5, PB6, PB7	116.79	72.2	184.6
P5 (CULVERT 7)	OB3, OB4, PB5	60.12	36.8	95.9
P6	OB8, PB11, PB12	49.38	29.9	78.5
P7 (POND SR1)	OB5, OB6, OB7, PB8, PB9, PB10	719.49	131.7	420.1
P8	OB5, OB6, OB7, PB8, PB9, PB10	707.97	173.4	486.7
P9 (CULVERT 6)	OB8, PB11	49.18	29.8	78.4
P10 (CULVERT 2)	OB2, OB3, OB4, PB4, PB5	98.72	57.9	150.1
P11 (CULVERT 3)	PB6, PB7	16.68	13.2	31.9
P12 (CULVERT 8)	OB5, OB6, OB7, PB8, PB9, PB10, PB13	721.28	137.9	420.3

NOTES:
1. LOCATION OF DROP STRUCTURES IS APPROXIMATE AND WILL BE FINALIZED IN THE FINAL DRAINAGE REPORT.

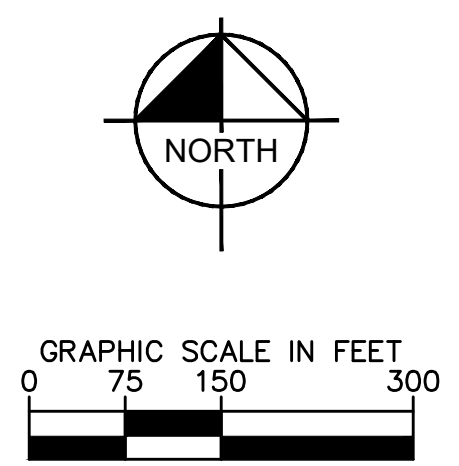

<p>2022 KIMLEY-HORN AND ASSOCIATES, INC. 2 North Nevada Avenue Suite 300 Colorado Springs, Colorado 80903 (719) 453-0180</p>	<p>DESIGNED BY: MK DRAWN BY: RS CHECKED BY: KK DATE: 04/08/2022</p>
<p>EAGLEVIEW EL PASO COUNTY, COLORADO POST DEVELOPMENT DRAINAGE MAP</p>	
<p>PRELIMINARY FOR REVIEW ONLY NOT FOR CONSTRUCTION</p>	
<p>PROJECT NO. 196288000</p>	
<p>SHEET 3</p>	



K:\COS_Civil\196288000_Eagleview\CADD\Exhibits\Drainage Analysis\196288000_TRIB_AREAS.dwg Morey, Doug 10/26/2022 12:52 PM

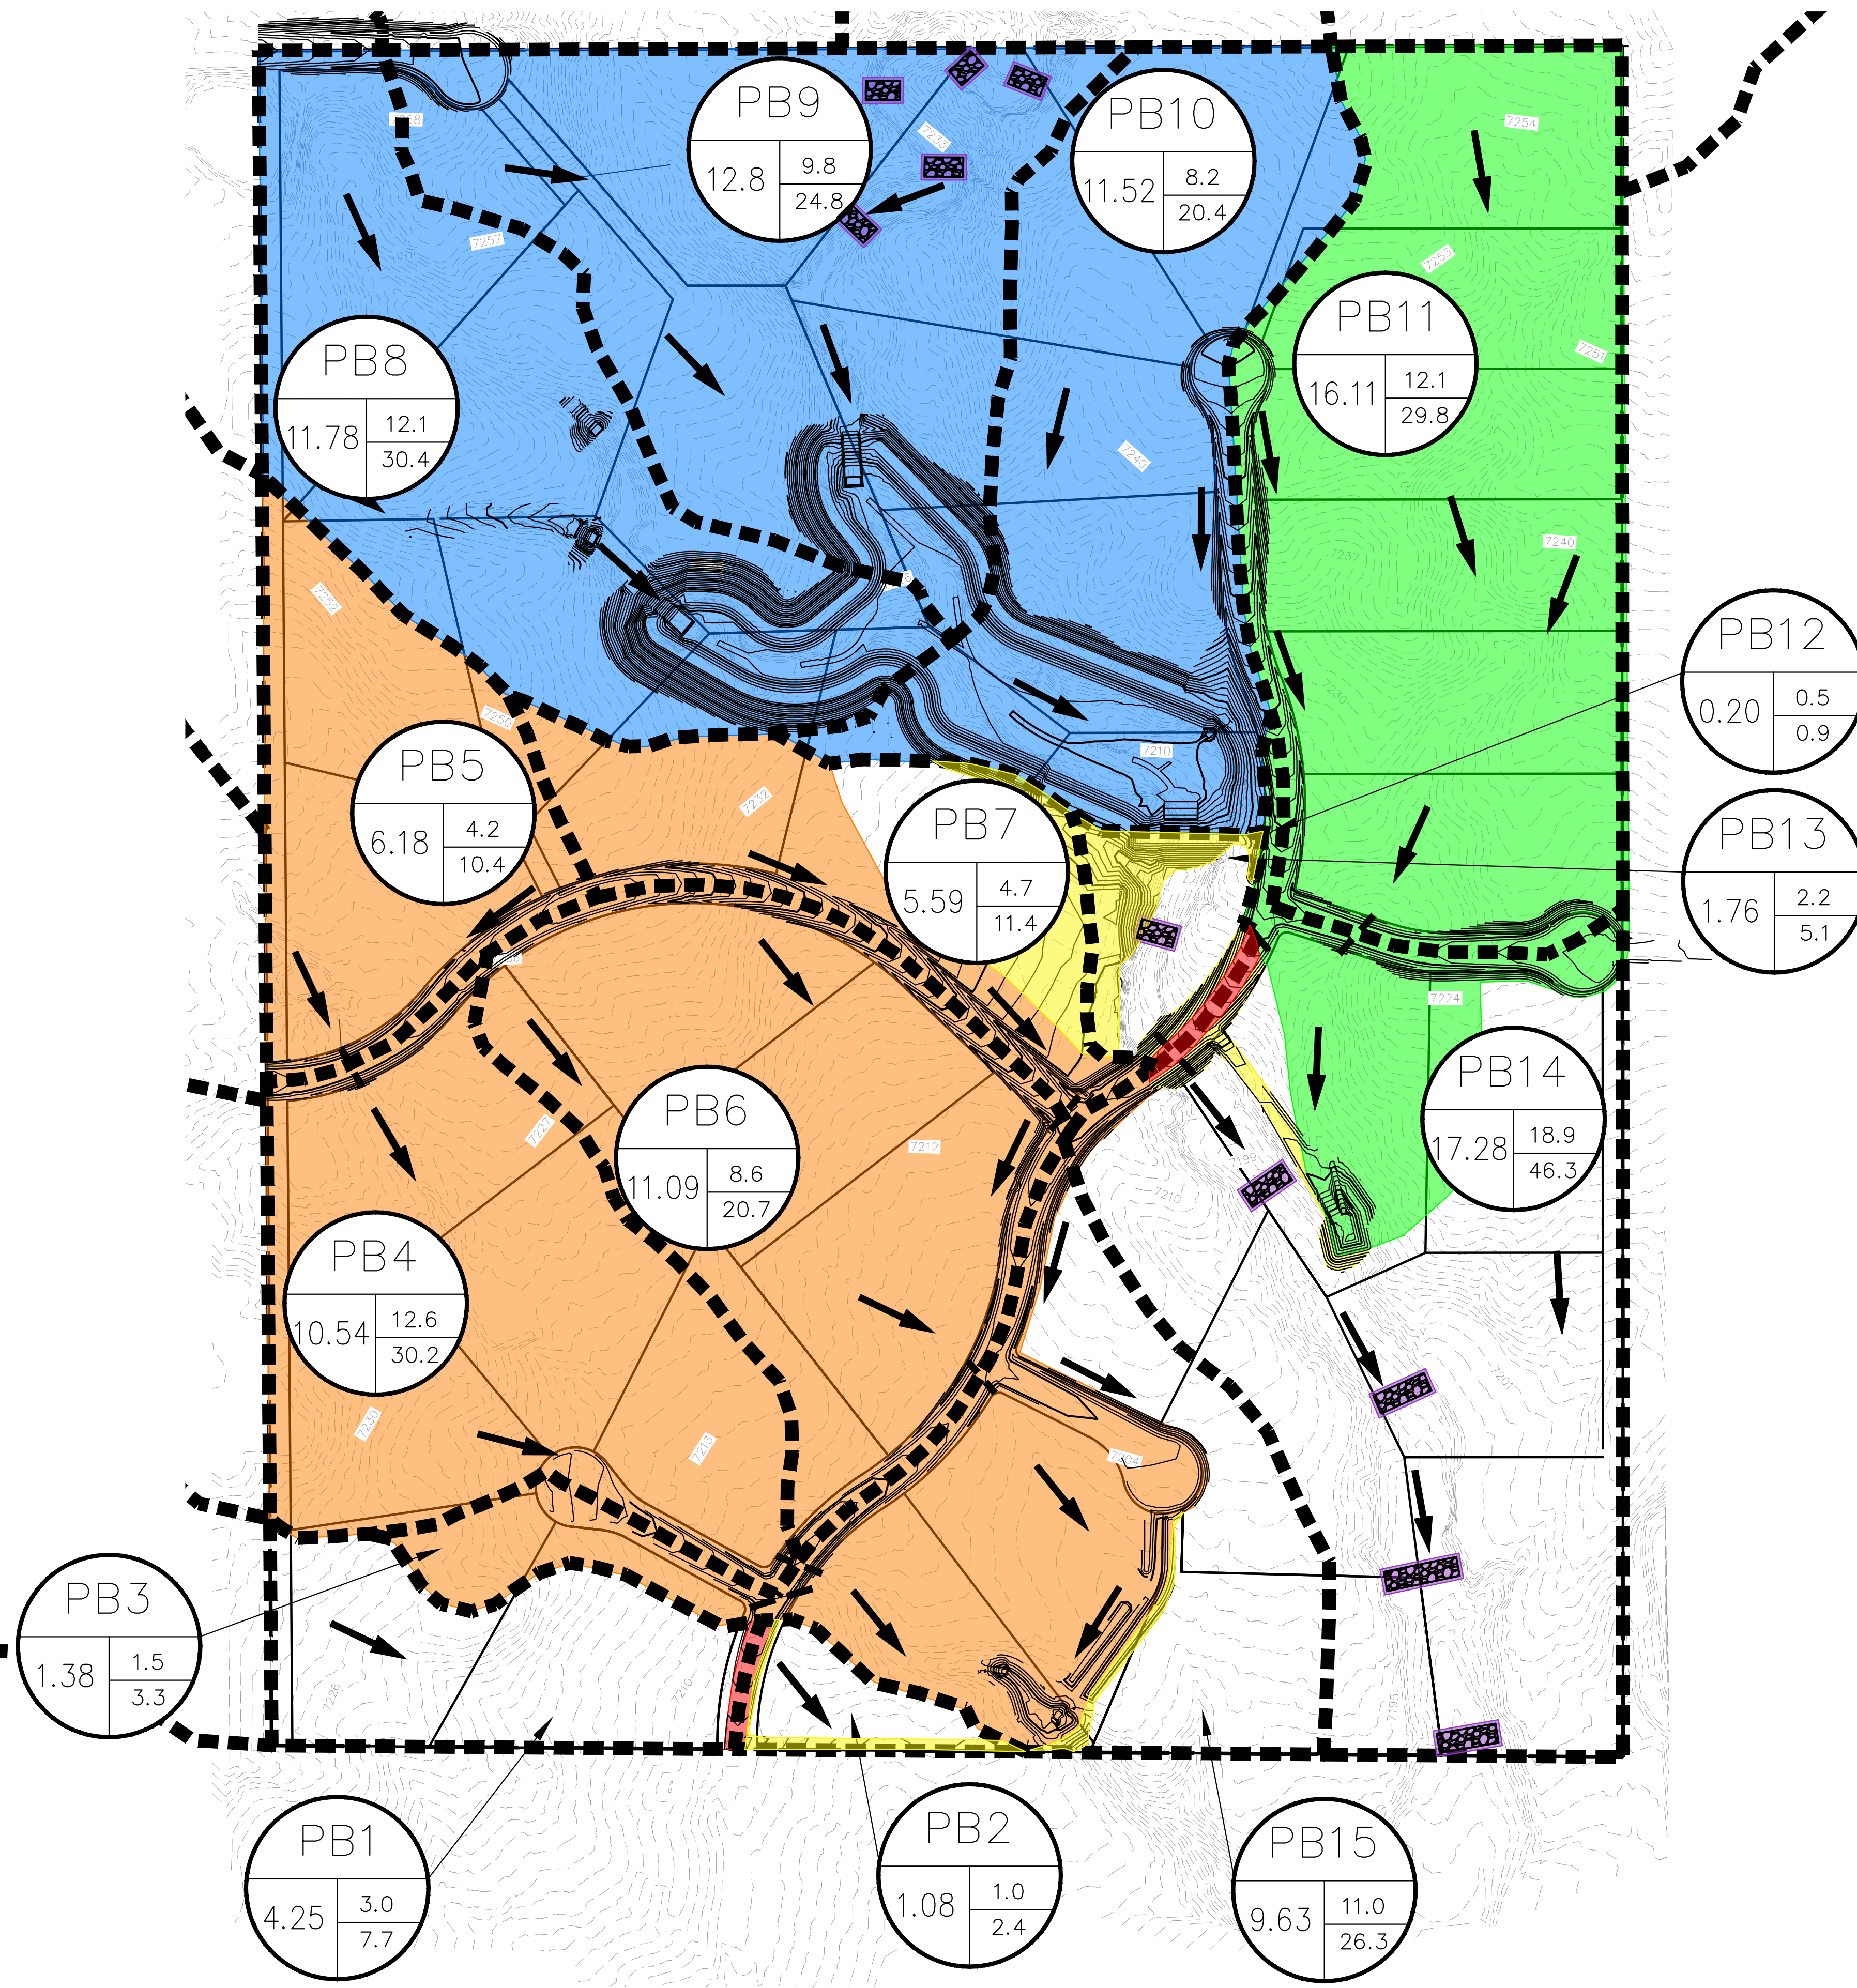

LEGEND

- DRAINAGE BASIN AREAS
- A - HEC-HMS BASINS
 - B - BASIN ACREAGE
 - C - 5-YR RUNOFF
 - D - 100-YR RUNOFF
- EXISTING CONTOURS
- PROPOSED CONTOURS
- PROPERTY BOUNDARY
- FLOW ARROW
- FLOW PATH
- AREA TRIBUTARY TO SR1
- AREA TRIBUTARY TO WQF1
- AREA TRIBUTARY TO WQF2
- ROADWAY AREA NOT TREATED
- GRADED AREA NOT TREATED
- STREAM STABILIZATION SITES NOTE TREATED

NOTES:
 1. NON-ROADWAY AREAS NOT TREATED BY A PBMP ARE EXCLUDED BASED ON ECM APP 1.7.1.B.5.
 2. ROADWAY AREA NOT TREATED BY A PBMP TOTALS 0.39 ACRES AND IS EXCLUDED BASED ON ECM APP 1.7.1.C.1.
 3. AREAS DISTURBED THROUGH THE CONSTRUCTION OF DROP STRUCTURES ARE EXCLUDED BASED ON ECM APP 1.7.1.B.5.





<p>2022 KIMLEY-HORN AND ASSOCIATES, INC. 2 North Nevada Avenue Suite 300 Colorado Springs, Colorado 80903 (719) 453-0180</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>NO.</th> <th>REVISION</th> <th>BY</th> <th>DATE</th> <th>APPR.</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	NO.	REVISION	BY	DATE	APPR.					
NO.	REVISION	BY	DATE	APPR.							
<p>DESIGNED BY: MK DRAWN BY: RS CHECKED BY: KK DATE: 04/08/2022</p>											
<p>EAGLEVIEW EL PASO COUNTY, COLORADO OVERVIEW MAP - PBMP TRIBUTARY AREAS</p>											
<p>PRELIMINARY FOR REVIEW ONLY NOT FOR CONSTRUCTION</p>											
<p>PROJECT NO. 196288000</p>											
<p>SHEET</p>											

K:\COS_Civil\196288000_Eagleview\CADD\Exhibits\Paintbrush Hills Pond C\PBH_PondC_EXH.dwg Kofford, Kevin 8/11/2022 3:38 PM

811 Know what's below.
Call before you dig.

CALL UTILITY NOTIFICATION
CENTER OF COLORADO
1-800-922-1987

CALL 2-BUSINESS DAYS IN ADVANCE
BEFORE YOU DIG, GRADE, OR EXCAVATE
FOR THE MARKING OF UNDERGROUND
MEMBER UTILITIES



- NOTES:**
1. THE PROPOSED RIPRAP IS TYPE M (D50 = 12-IN) WITH A DEPTH OF 24-IN.
 2. THE PROPOSED RIPRAP SHALL MATCH THE NORTH-SOUTH EXTENTS OF THE EXISTING POND C SPILLWAY RIPRAP AND EXTEND 10-FT WEST OF THE PROPERTY LINE.

NO.	REVISION	BY	DATE	APPR

Kimley»Horn
2021 KIMLEY-HORN AND ASSOCIATES, INC.
2 North Nevada Avenue Suite 300
Colorado Springs, Colorado 80903 (719) 453-0180

DESIGNED BY: MJK
DRAWN BY: MJK
CHECKED BY: KRK
DATE: 06/01/2022

EAGLEVIEW
EL PASO COUNTY, COLORADO
CONSTRUCTION DOCUMENTS
PBH NO. 14 - POND C EXHIBIT

PRELIMINARY
FOR REVIEW ONLY
NOT FOR
CONSTRUCTION

Kimley»Horn
Kimley-Horn and Associates, Inc.

PROJECT NO.
196106001

SHEET
EXH

ITEM NO.	ITEM DESCRIPTION	UNIT	UNIT COST	QUANTITY	EXTENDED COST
1	TYPE M RIPRAP W/ BEDDING (D50= 12")	CY	\$178.00	107	\$19,046.00
CONTINGENCIES (20%) (CONSTRUCTION ITEMS)					\$3,809.20
TOTAL PROJECT COST					\$22,855.20

APPENDIX F: OPCC

Kimley»Horn

2 North Nevada, Suite 300
Colorado Springs, Colorado 80903

Project: Eagleview
Project Number: _____
Date: October 28, 2022

Prepared By: KRK
Checked By: JD

Regional Drainage Pond- SR1				
Rip Rap Chutes/ Forebay #1 (24" Riprap)	CY	485	\$ 178	\$ 86,330
Rip Rap Chutes/ Forebay #2 (24" Riprap)	CY	530	\$ 178	\$ 94,340
Rip Rap Chutes/ Forebay #3 (12" Riprap)	CY	36	\$ 178	\$ 6,408
Pond Earthwork	CY	76,000	\$ 3	\$ 228,000
Concrete Trickle Channel	LF	1280	\$ 64	\$ 81,920
Concrete Micropool	EA	1	\$ 25,000	\$ 25,000
Concrete Outlet Structure	EA	1	\$ 35,000	\$ 35,000
Concrete Outfall Pipe (96 Inch)	LF	60	\$ 520	\$ 31,200
Concrete FES w/ Toe Wall	EA	1	\$ 5,000	\$ 5,000
Rip Rap Emergency Spillway (12" Riprap)	CY	1800	\$ 178	\$ 320,400
Concrete Cutoff Wall (Emergency Spillway)	LF	180	\$ 60	\$ 10,800
Maintenance Road (6" Thick)	CY	680	\$ 56	\$ 38,080
Certification	EA	1	\$ 8,000	\$ 8,000
Mobilization	EA	1	\$ 10,000	\$ 10,000
Erosion Control	LS	1	\$ 40,000	\$ 40,000
Contingency	%	35%	\$ 1,020,478	\$ 357,167
	Subtotal			\$ 1,377,645
Regional Drainage Improvements				
Drop Structures	EA	10	\$ 208,000	\$ 2,080,000
24" Rip Rap Chute #3	CY	90	\$ 178	\$ 16,020
9" Rip Rap Chute #4	CY	62	\$ 178	\$ 11,036
Contingency	%	35%	\$ 2,107,056	\$ 737,470
	Subtotal			\$ 2,844,526
Local Drainage Pond (non-reimbursable)				
Mobilization	EA	2	\$ 5,000	\$ 10,000
Rip Rap Chutes/ Forebays (3) (12" Riprap)	CY	140	\$ 178	\$ 24,920
Concrete Trickle Channel	LF	141	\$ 64	\$ 9,024
Concrete Micropool	EA	2	\$ 5,000	\$ 10,000
Concrete Type C Inlet	EA	2	\$ 5,138	\$ 10,276
Concrete Outfall Pipe	LF	90	\$ 70	\$ 6,300
Concrete FES	EA	2	\$ 420	\$ 840
Concrete Cradle Wall	EA	2	\$ 2,000	\$ 4,000
Rip Rap Outfall Protection	EA	2	\$ 5,000	\$ 10,000
Rip Rap Emergency Spillway	CY	90	\$ 178	\$ 16,020
Concrete Cutoff Wall	EA	2	\$ 5,000	\$ 10,000
Maintenance Road (6" Thick)	CY	245	\$ 56	\$ 13,720
Erosion Control	EA	2	\$ 10,000	\$ 20,000
Certification	EA	2	\$ 5,000	\$ 10,000
Contingency	%	20%	\$ 155,100	\$ 31,020
	Subtotal			\$ 186,120
Local Drainage Improvements (non-reimbursable)				
72" RCP Culvert	LF	170	\$ 421	\$ 71,570
36" RCP Culvert	LF	490	\$ 128	\$ 62,720
24" RCP Culvert	LF	179	\$ 83	\$ 14,857
18" RCP Culvert	LF	150	\$ 70	\$ 10,500
72" RCP FES	EA	4	\$ 2,526	\$ 10,104
36" RCP FES	EA	14	\$ 768	\$ 10,752
24" RCP FES	EA	6	\$ 498	\$ 2,988
18" RCP FES	EA	4	\$ 420	\$ 1,680
Concrete Saddle Wall	EA	28	\$ 2,000	\$ 56,000
6" Rip Rap Protection	CY	37	\$ 178	\$ 6,586
9" Rip Rap Protection	CY	207	\$ 178	\$ 36,846
12" Rip Rap Protection	CY	315	\$ 178	\$ 56,070
Contingency	%	20%	\$ 340,673	\$ 68,135
	Subtotal			\$ 408,808
PROJECT TOTAL				\$ 4,817,099

Conceptual Opinion of Probable Construction Cost

The Engineer has no control over the cost of labor, materials, equipment, or over the Contractor's methods of determining prices or over competitive bidding or market conditions. Opinions of probable costs provided herein are based on the information known to Engineer at this time and represent only the Engineer's judgment as a design professional familiar with the construction industry. The Engineer cannot and does not guarantee that proposals, bids, or actual construction costs will not vary from its opinions of probable costs.