

Post Construction Stormwater Management Applicability Evaluation Form

This form is to be used by the Engineer of Record to evaluate applicable construction activities to determine if the activities are eligible for an exclusion to permanent stormwater quality management requirements. Additionally Part III of the form is used to identify and document which allowable control measure design standard is used for the structure.

Part I. Project Information	
1. Project Name: RETREAT AT TIMBERRIDGE FILING NO. 3	
2. El Paso County Project #: SF-22-41	3. ESQCP #:
4. Project Location: East of Vollmer Rd.	Project Location in MS4 Permit Area (Y or N): N
5. Project Description: Final Plat for 33 single family residential lots	
If project is located within the El Paso County MS4 Permit Area, please provide copy of this completed form to the Stormwater Quality Coordinator for reporting purposes; and save completed form with project file.	

Part II. Exclusion Evaluation: Determine if Post-Construction Stormwater Management exclusion criteria are met. Note: Questions A thru K directly correlate to the MS4 permit Part I.E.4.a.i (A) thru (K). If Yes, to any of the following questions, then mark Not Applicable in Part III, Question 2.				
Questions	Yes	No	Not Applicable	Notes:
A. Is this project a "Pavement Management Site" as defined in Permit Part I E.4.a.i. (A)?		X		This exclusion applies to "roadways" only. Areas used primarily for parking or access to parking are not included.
B. Is the project "Excluded Roadway Development"?				
• Does the site add less than 1 acre of paved area per mile?		X		
• Does the site add 8.25 feet or less of paved width at any location to the existing roadway?		X		
C. Does the project increase the width of the existing roadway by less than 2 times the existing width?		X		For redevelopment of existing roadways, only the area of the existing roadway is excluded from post-construction requirements when the site does not increase the width by two times or more. <i>This exclusion only excludes the original roadway area it does NOT apply to entire project.</i>
D. Is the project considered an aboveground and Underground Utilities activity?		X		Activity can NOT permanently alter the terrain, ground cover or drainage patterns from those present prior to the activity
E. Is the project considered a "Large Lot Single-Family Site"?	X			Must be a single-residential lot or agricultural zoned land, ≥ 2.5 acres per dwelling and total lot impervious area < 10 percent.

Questions (cont'd)	Yes	No	Not Applicable	Notes
F. Do Non-Residential or Non-Commercial Infiltration Conditions exist? Post-development surface conditions do not result in concentrated stormwater flow or surface water discharge during an 80 th percentile stormwater runoff event.		X		Exclusion does not apply to residential or commercial sites for buildings. A site specific study is required and must show: rainfall and soil conditions; allowable slopes; surface conditions; and ratios of imperviousness area to pervious area.
G. Is the project land disturbance to Undeveloped Land where undeveloped land remains undeveloped following the activity?		X		Project must be on land with no human made structures such as buildings or pavement.
H. Is the project a Stream Stabilization Site?	X			Standalone stream stabilization projects are excluded.
I. Is the project a bike or pedestrian trail?		X		Bike lanes for roadways are not included in this exclusion, but may qualify if part of larger roadway activity is excluded in A, B or C above.
J. Is the project Oil and Gas Exploration?		X		Activities and facilities associated with oil and gas exploration are excluded.
K. Is the project in a County Growth Area?				Note, El Paso County does not apply this exclusion. All Applicable Construction Activity in El Paso County must comply the Post-Construction Stormwater Management criteria.

Part III. Post Construction (Permanent) Stormwater Control Determination		
Questions	Yes	No
1. Is project an Applicable Construction Activity?	X	
2. Do any of the Exclusions (A-K in Part II) apply?		X
<p>If the project is an Applicable Construction Activity and no Exclusions apply then Post-Construction (Permanent) Stormwater Management is required. Complete the applicable sections of Part IV below and then coordinate signatures for form and place in project file.</p> <p>If the project is not an Applicable Construction Activity, or Exclusion(s) apply then Post-Construction (Permanent) Stormwater Management is NOT required. Coordinate signatures for form and place in project file.</p>		

Part IV: Onsite PWQ Requirements, Documentation and Considerations	Yes	No
1. Check which Design Standard(s) the project will utilize. Standards align with Control Measure Requirements identified in permit Part I.E.4.a.iv.	X	
A. Water Quality Capture Volume (WQCV) Standard	X	
B. Pollutant Removal/80% Total Suspended Solids Removal (TSS)		X
C. Runoff Reduction Standard	X	
D. Applicable Development Site Draining to a Regional WQCV Control Measure		X
E. Applicable Development Site Draining to a Regional WQCV Facility		X
F. Constrained Redevelopment Sites Standard		X
G. Previous Permit Term Standard		X
2. Will any of the project permanent stormwater control measure(s) be maintained by another MS4? If Yes, you must obtain a structure specific maintenance agreement with the other MS4 prior to advertisement.		X
3. Will any of the project permanent stormwater control measures be maintained by a private entity or quasi-governmental agency (e.g. HOA or Special District, respectively)? If Yes, a Private Detention Basin/Stormwater Quality Best Management Practice Maintenance Agreement and Easement must be recorded with the El Paso County Clerk and Recorder.	X	


Part V Notes (attach an additional sheet if you need more space)

Portions of this site east of Sand Creek will be treated by the existing EDB constructed with Filing No. 1 (Pond 2) with the large lots west of Sand Creek being treated by the proposed EDB (Pond 3). The portions of Arroya Lane east of Aspen Valley Road will be treated by the proposed Rain Garden 1 just south of Arroya Lane.

Areas where water quality is treated through runoff reduction and areas that are excluded from requiring water quality are shown on the attached Exhibit.

Project design is complete to include the project design, construction plans, drainage report, specifications, and maintenance and access agreements as required. The engineering, drainage considerations and information used to complete these documents is complete, true, and accurate to the best of my belief and knowledge.

Signature and Stamp of Engineer of Record

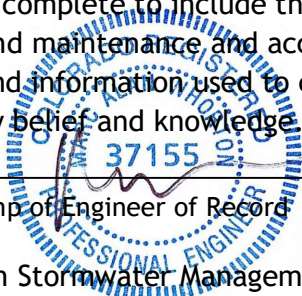


12/5/2023

Date

Post-Construction Stormwater Management Applicability Form has been reviewed and the project design, construction plans, drainage report, specifications, and maintenance and access agreements as required, have been reviewed for compliance with the Post Construction Stormwater Management process and MS4 Permit requirements.

Signature of El Paso County Project Engineer

Date

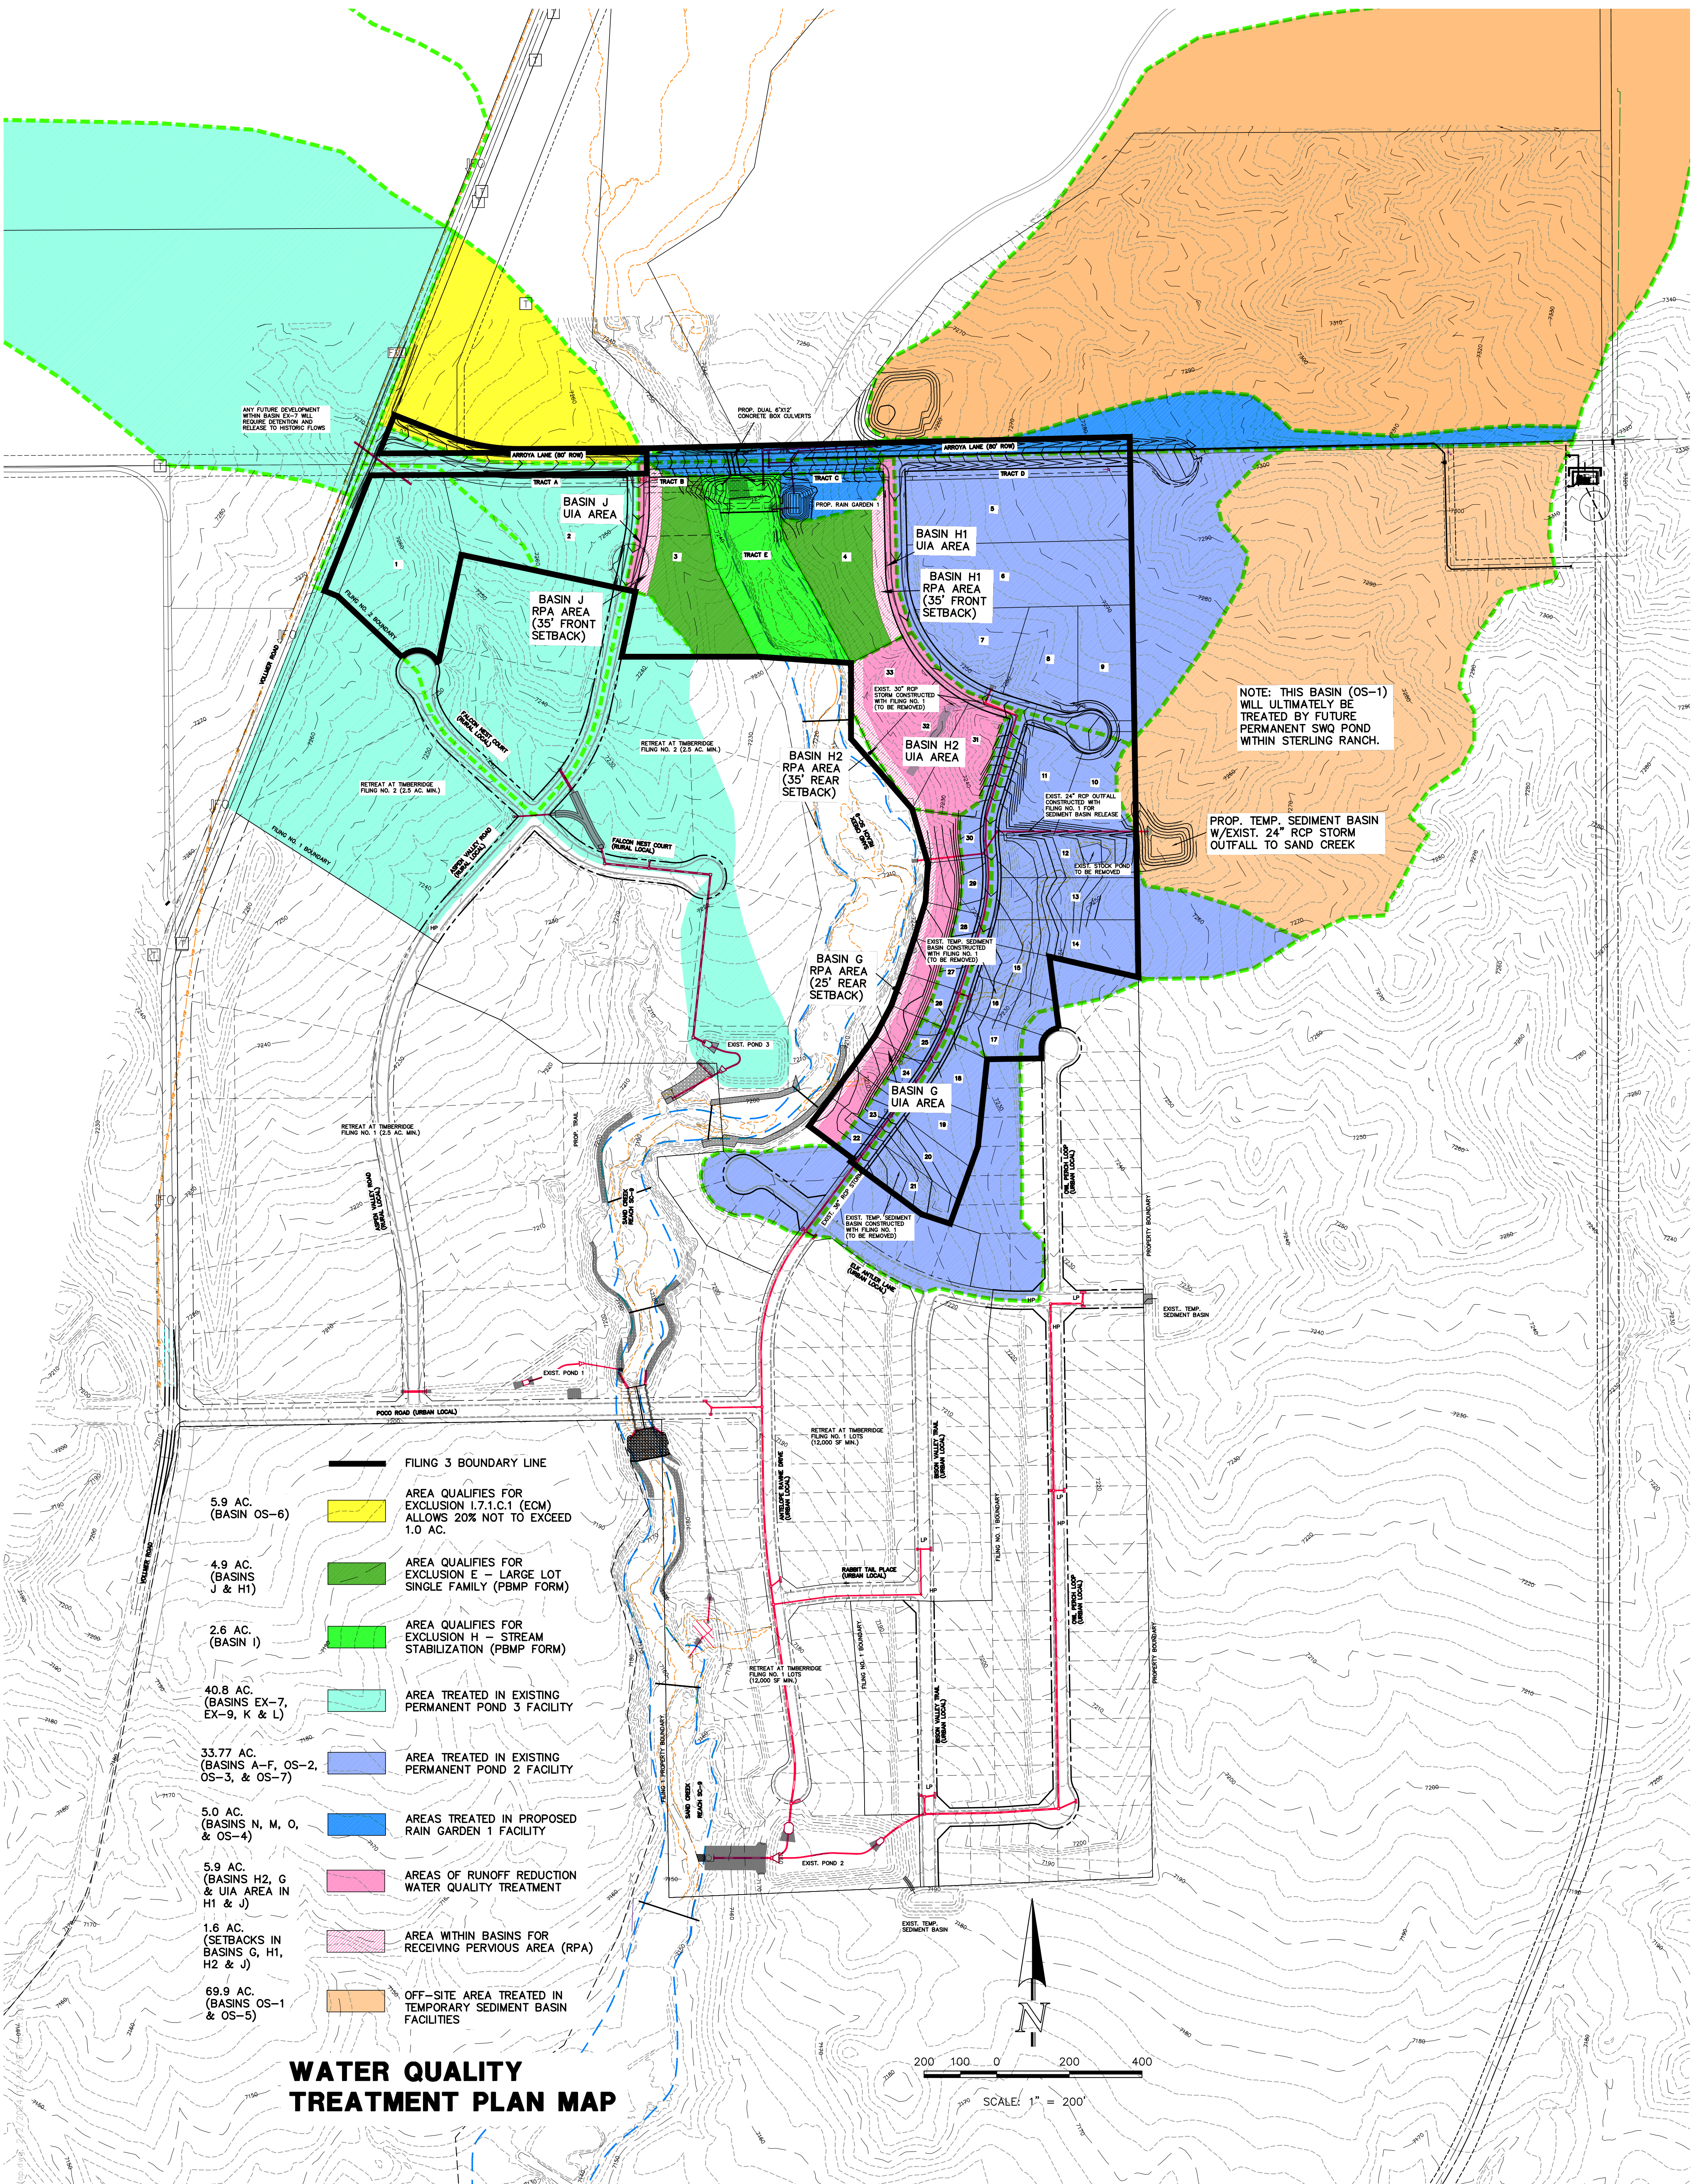

ANY FUTURE DEVELOPMENT WITHIN BASIN EX-7 WILL REQUIRE DETENTION AND RELEASE TO HISTORIC FLOWS

PROP. DUAL 4"x12" CONCRETE BOX CULVERTS

NOTE: THIS BASIN (OS-1) WILL ULTIMATELY BE TREATED BY FUTURE PERMANENT SWQ POND WITHIN STERLING RANCH.

PROP. TEMP. SEDIMENT BASIN W/EXIST. 24" RCP STORM OUTFALL TO SAND CREEK

- 5.9 AC. (BASIN OS-6) AREA QUALIFIES FOR EXCLUSION I.7.1.C.1 (ECM) ALLOWS 20% NOT TO EXCEED 1.0 AC.
- 4.9 AC. (BASINS J & H1) AREA QUALIFIES FOR EXCLUSION E - LARGE LOT SINGLE FAMILY (PBMP FORM)
- 2.6 AC. (BASIN I) AREA QUALIFIES FOR EXCLUSION H - STREAM STABILIZATION (PBMP FORM)
- 40.8 AC. (BASINS EX-7, EX-9, K & L) AREA TREATED IN EXISTING PERMANENT POND 3 FACILITY
- 33.77 AC. (BASINS A-F, OS-2, OS-3, & OS-7) AREA TREATED IN EXISTING PERMANENT POND 2 FACILITY
- 5.0 AC. (BASINS N, M, O, & OS-4) AREAS TREATED IN PROPOSED RAIN GARDEN 1 FACILITY
- 5.9 AC. (BASINS H2, G & UIA AREA IN H1 & J) AREAS OF RUNOFF REDUCTION WATER QUALITY TREATMENT
- 1.6 AC. (SETBACKS IN BASINS G, H1, H2 & J) AREA WITHIN BASINS FOR RECEIVING PVIOUS AREA (RPA)
- 69.9 AC. (BASINS OS-1 & OS-5) OFF-SITE AREA TREATED IN TEMPORARY SEDIMENT BASIN FACILITIES

WATER QUALITY TREATMENT PLAN MAP

