

BOXWELL REDEFINES

FLEXIBILITY

WITH 8x20 RELOCATABLES

PORTABLE DURABLE STACKABLE VERSATILE CUSTOMIZABLE
LONG-LASTING EASY TO BUILD WEATHERPROOF INNOVATIVE
DEPENDABLE TRUSTED PROTECTED EXPERTLY ENGINEERED




 **Boxwell**[®]
BUILT FOR YOUR SUCCESS

www.boxwell.co
sales@boxwell.co
(303) 317-5850



COMMON CONFIGURATIONS

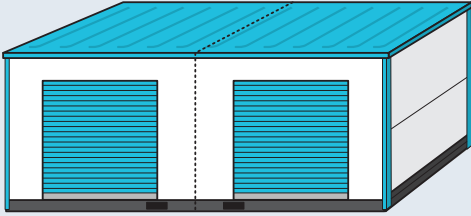

TWO SIDE DOORS

Two 80 ft² rentable units

DIMENSIONS


Exterior: 234" L x 96" W x 96" H

Interior: 230" L x 92" W x 92" H

Door Opening: 68" W x 72" H

WEIGHT

Tare: 3,500 lbs

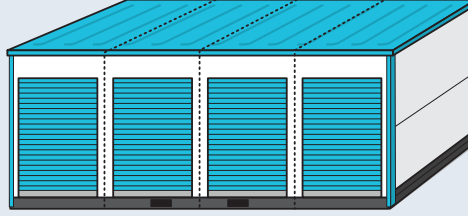

FOUR SIDE DOORS

Four 40 ft² rentable units

DIMENSIONS


Exterior: 234" L x 96" W x 96" H

Interior: 230" L x 92" W x 92" H

Door Opening: 48" W x 72" H

WEIGHT

Tare: 4,000 lbs

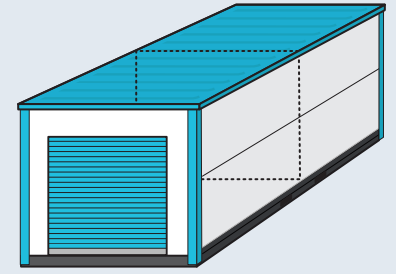

END DOOR(S)

One 160 ft² rentable unit or
Two 80 ft² units (if divided)

DIMENSIONS

Exterior: 234" L x 96" W x 96" H

Interior: 230" L x 92" W x 92" H

Door Opening: 68" W x 72" H

WEIGHT

Tare: 3,300 lbs

FEATURES + OPTIONS *Boxwell relocatable units are continuously being upgraded and improved. Exact specifications are subject to change without notice. Units are fully custom, additional options available.*

STEEL CONSTRUCTION

- Highest grade and best quality steel, SPA-H and SPA-C
- Wall panel thickness: 1.0mm (19 ga)
- Roof thickness: 4.0mm (6 ga) corrugated "ISO Style" steel
- All hardware is stainless steel, will not rust
- Customizable to any color
- Hot-dipped galvanized upgrade available

STRUCTURE

- Load Rating: 125 psf on base
- Wind Rating: 120 mph
- Snow Load: 60 psf on roof
- Build time: less than 30 minutes per unit
- Fork pockets for easy moving/stacking
- Roof made from one piece of steel, no welds

INTERIOR

- Marine grade plywood ($\frac{3}{4}$ ") sealed with phenolic resin textured coating (non-slip, non-toxic, non-odorous)
- Choose from light or dark flooring finish
- Diamond plate flooring upgrade available
- Wall vents promote ample air flow
- Anti-condensation spray on ceiling
- Adjust unit mix with removable steel partition

SERVICES + WARRANTIES

- Graphic design, unit renderings, and site layouts available to all Boxwell clients
- Standard for all first orders: on-site Boxwell rep to oversee delivery and unload process
- White glove install service available
- One year warranty: manufacturing, workmanship
- Five year warranty: paint