

Prepared for CEI

Traffic Impact Analysis

March 30, 2023


Walmart Store #4335 Fuel Station
Falcon, Colorado

Interim Review Only

Not intended for permit or construction
Engineer: Thomas Duncan, P.E.
P.E. Serial No. 0044552
Date: March 30, 2023

Include endorsement
stamps and signatures

PCD File @
PPR2323



Traffic Engineer's Statement

The attached traffic report and supporting information were prepared under my responsible charge and they comport with the standard of care. So far as is consistent with the standard of care, said report was prepared in general conformance with the criteria established by the County for traffic reports.

[Name, P.E. #] Date

Developer's Statement

I, the Developer, have read and will comply with all commitments made on my behalf within this report.

[Name, Title] Date
[Business Name]
[Address]

WPM Project Number: T04-22006-05

EXECUTIVE SUMMARY

As requested by CEI, Walter P Moore conducted a traffic impact analysis for the proposed Fuel Station at Walmart Store #4335 in Falcon, Colorado. The proposed development will develop on parking lot removing certain parking spaces and has E Woodmen Rd to the north and Meridian Rd to the east. The purpose of the study was to determine the potential impacts on traffic operations in the area related to the proposed development. Transportation and site improvements to mitigate impacts were investigated, if necessary.

Study Area

The following four intersections in the study area were analyzed as part of the Traffic Impact Analysis:

1. Woodmen Rd and Foxtail Meadow Ln (Uncontrolled: Right In – Right Out).
2. Meridian Rd and Woodmen Rd (Signalized).
3. Meridian Rd and WM Drive (Uncontrolled)
4. Foxtail Meadow Ln and Meridian Market View (Two-way Stop).
5. Foxtail Meadow Ln and Rolling Thunder Way (Signalized).
6. Rolling Thunder Way and Meridian Rd (Signalized).
7. Meridian Market View and Meridian Rd (Uncontrolled: Right In – Right Out).

Analysis

Intersection operations were analyzed using *Synchro 11.0*. Capacity analyses were performed for:

- Existing conditions (2023) – using collected 2023 counts and signal timings.
- Proposed conditions (2023) – which include the site-generated traffic for the proposed development.

Summary

In this study, traffic conditions for the year 2023 were analyzed with the addition of trips generated from the proposed fuel station. The existing and proposed year are same, and no background projects were identified in the analysis. Therefore, the proposed volumes were calculated by adding site generated traffic to the existing volumes for the purpose of the analysis. The level of service from *Synchro 11.0* were used as Measures of Effectiveness (MOE) to determine the need for potential mitigation measures. Following is a summary of the study:

- The proposed site will include a fuel station having 16 fueling locations.
- Based on the level of service comparisons, all intersections performed at an acceptable level of service. Therefore, no mitigations are required.

Include section on Road Impact Fees
Convenience Commercial will be the category assessed against the building

CONTENTS

INTRODUCTION	1
AREA CONDITIONS	1
ROADWAYS.....	1
INTERSECTIONS	2
PEDESTRIAN CONNECTIVITY.....	3
VOLUMES.....	3
BACKGROUND DEVELOPMENTS	4
PLANNED DEVELOPMENT	4
SITE DEVELOPMENT	4
APPROPRIATENESS OF ACCESS LOCATION	4
SITE CIRCULATION AND PARKING	4
COMPLIANCE WITH ACCESS CONTROL POLICIES	5
STUDY METHODOLOGY.....	5
TRAFFIC SCENARIOS	5
TRAFFIC SIGNAL TIMING ASSUMPTIONS.....	5
GROWTH RATE	5
PROJECTED CONDITIONS	6
TRIP GENERATION	6
PASS-BY TRIP REDUCTION	6
TRIP DISTRIBUTION.....	9
TRAFFIC ANALYSIS.....	10
EXISTING CONDITIONS (2023).....	12
PROPOSED CONDITIONS (2023)	12
LEVEL OF SERVICE COMPARISON	15
QUEUE ANALYSIS.....	15
MITIGATION ANALYSIS	15
CONCLUSIONS AND RECOMMENDATIONS	16
REFERENCES	17

APPENDIX

- TAB ONE: Existing Traffic Volumes 2023
- TAB TWO: Existing Conditions Capacity Analysis (2023)
- TAB THREE: Proposed Conditions Capacity Analysis (2023)
- TAB FOUR: Queue & Turn Lane Analysis

LIST OF FIGURES

- FIGURE 1: Site Location Map
- FIGURE 2: Existing Lane Configuration
- FIGURE 3: Existing AM Peak Volumes 2023
- FIGURE 4: Existing PM Peak Volumes 2023
- FIGURE 5: Proposed Site Layout
- FIGURE 6: Site Circulation Plan
- FIGURE 7: Proposed Trip Distribution AM Peak Hour
- FIGURE 8: Proposed Trip Distribution PM Peak Hour
- FIGURE 9: Site Generated Trips AM Peak Hour
- FIGURE 10: Site Generated Trips PM Peak Hour
- FIGURE 11: Proposed AM Peak Volumes 2023
- FIGURE 12: Proposed PM Peak Volumes 2023

LIST OF TABLES

Table 1: Pedestrian Destinations in Study Area	3
Table 2: Trip Generation Equations	6
Table 3: Trip Generation Volumes	8
Table 4: Level of Service Criteria for Signalized Intersections	11
Table 5: Level of Service Criteria for Unsignalized Intersections	11
Table 6: Level of Service Comparison – AM Peak Hour	13
Table 7: Level of Service Comparison – PM Peak Hour	14

INTRODUCTION

As requested by CEI, Walter P Moore conducted a traffic impact analysis for the proposed Fuel Station at Walmart Store #4335 in Falcon, Colorado. The proposed fuel station will be developed within the existing campus and would replace some existing parking spaces. It will be connected to Meridian Rd (to the east) and Foxtail Meadow Rd (to the west) via Meridian Market View.

The purpose of the study was to determine the potential impacts to traffic operations in the area related to the proposed development. Transportation and site improvements to mitigate impacts were investigated, if necessary.

AREA CONDITIONS

The site is bordered by Woodmen Rd to the north, Meridian Rd to the east and Walmart Supercenter parking to the west. The proposed development of the site is described under the heading "PLANNED DEVELOPMENT." The proposed site location is shown in **Figure 1**.

ROADWAYS

The primary roadways in the study area are described in the following paragraphs.

Woodmen Road is a four lane east-west expressway with turn lanes at major intersections in the study area. It ends at the intersection with US Hwy 24.


Posted speed limit: 45 mph

Bus route and stops: No

Meridian Road is a four lane north-south principal arterial.

Posted speed limit: 35 mph

Bus route and stops: No

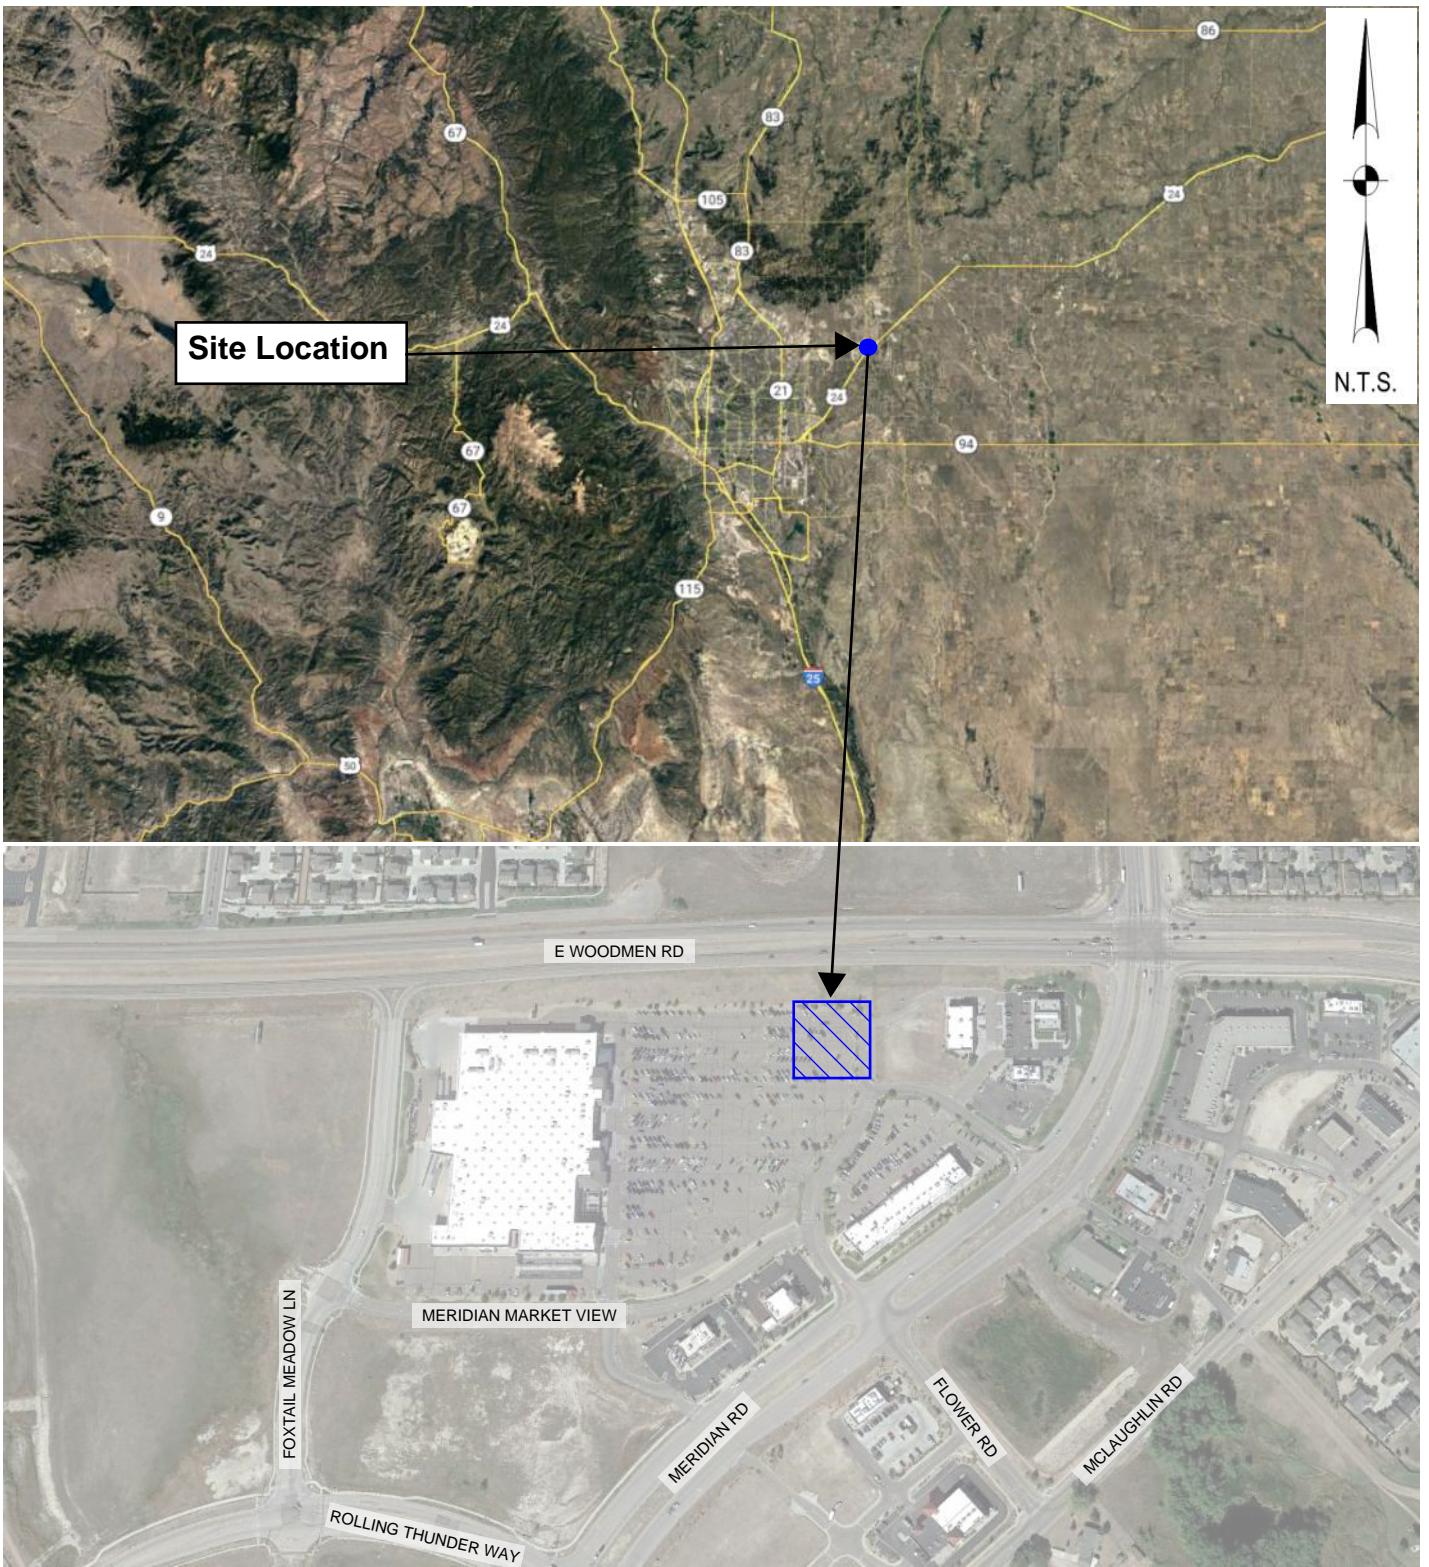

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

walter
p moore

713.630.7300

Sheet Title:

SITE LOCATION MAP

WPMA P.N.:

T04-22006-05

Designed by:

TD

Figure No.

Date:

March 2023

Drawn by:

JB

1

Rolling Thunder Way is a two lane east-west collector road with turn lanes at intersection in the study area.

Posted speed limit: 35 mph

Bus route and stops: No

Foxtail Meadow Ln is a two lane north-south collector road with turn lanes at intersection in the study area.

Posted speed limit: 30 mph

Bus route and stops: No

INTERSECTIONS

There are seven existing intersections that were analyzed as part of this study. The existing lane configurations can be seen in **Figure 2**. The intersections include:

1. Woodmen Rd and Foxtail Meadow Ln

- Traffic Control: Uncontrolled (Right In – Right Out)
- Pedestrian Crossing: N.A.

2. Meridian Rd and Woodmen Rd


- Traffic Control: Signalized
- Pedestrian Crossing: All approach directions

3. Meridian Rd and Walmart Drive/Flower Rd

- Traffic Control: Two Way Stop Controlled (Right In – Right Out)
Southbound right turn is free
Northbound right turn is stop controlled
- Pedestrian Crossing: Southbound approach (Walmart Drive)

4. Foxtail Meadow Ln and Meridian Market View

- Traffic Control: Two Way Stop Controlled
- Pedestrian Crossing: Westbound approach (Meridian Market View)

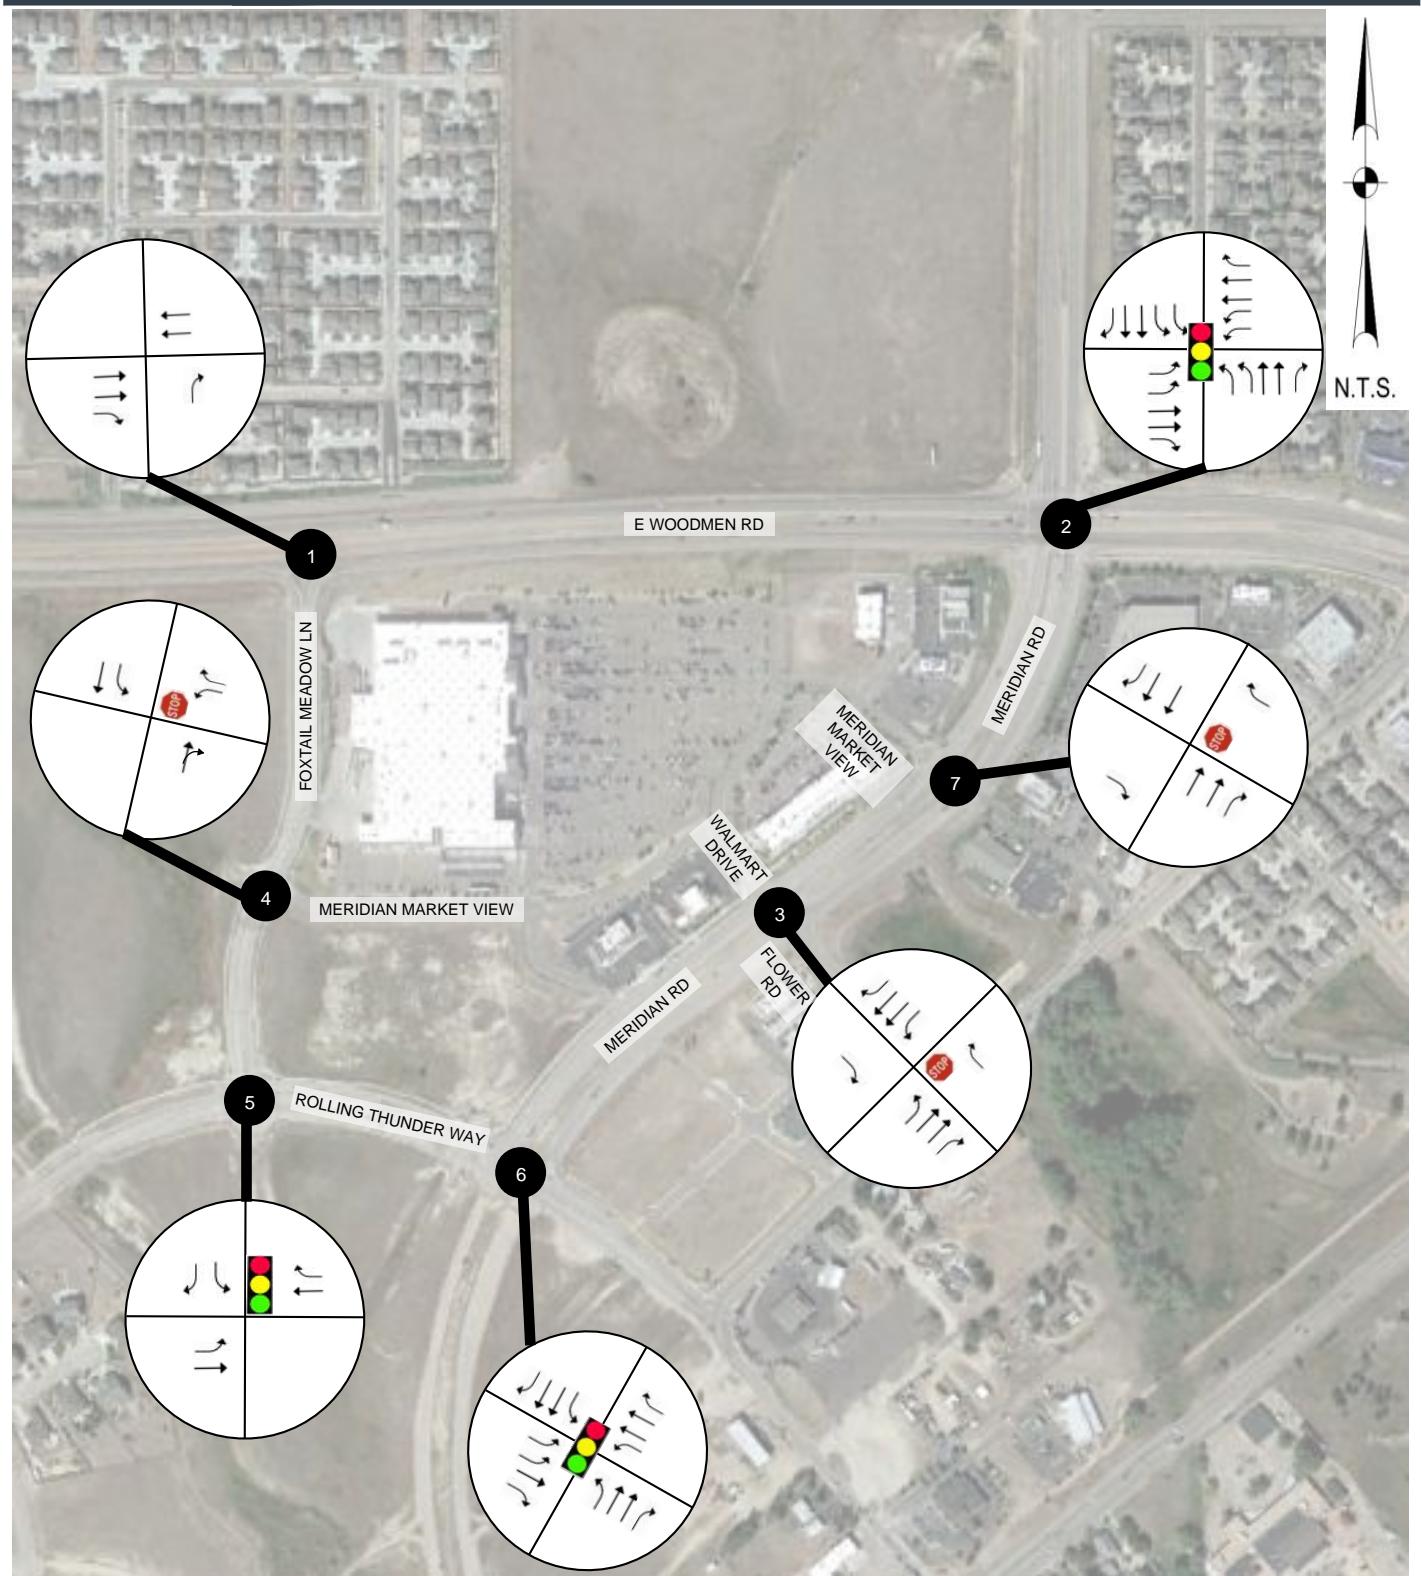

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA

Sheet Title:

EXISTING LANE CONFIGURATION

WPMA P.N.:	Designed by:	Figure No.
T04-22006-05	TD	

Date:	Drawn by:
March 2023	JB

2



Walter P Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

**walter
p moore**

713.630.7300

5. Foxtail Meadow Ln and Rolling Thunder Way

- Traffic Control: Signalized
- Pedestrian Crossing: All approach directions

6. Rolling Thunder Way and Meridian Rd

- Traffic Control: Signalized
- Pedestrian Crossing: All approach directions

7. Meridian Market View and Meridian Rd

- Traffic Control: Uncontrolled (Right In – Right Out)
- Pedestrian Crossing: N.A.

PEDESTRIAN CONNECTIVITY

The following pedestrian destinations were identified within and near the study area, as shown in **Table 1**. The proposed fuel station is not connected to any pedestrian facilities within the study area.

Table 1: Pedestrian Destinations in Study Area


Sr. No.	Name	Land Use Type	Distance from Project
1	Walmart Supercenter	Commercial	400 ft. west
2	Restaurants	Commercial	150 ft. southeast

VOLUMES

Turning movement counts for the AM and PM peaks were collected on January 10, 2023, from 7:00 AM - 9:00 AM and 4:00 PM - 6:00 PM for the intersections in the study area. The analysis showed that the AM peak hour occurred from 7:00-8:00 AM and the PM peak hour from 4:15-5:15 PM for the weekday traffic. The daily traffic volumes were also collected on the same day along with turning movement counts. The daily traffic volumes were collected at the following locations:

- i. Woodmen Rd EB between Foxtail Meadow and Meridian
- ii. Woodmen Rd WB between Foxtail Meadow and Meridian

Figures 3 and 4 illustrate the existing AM peak and PM peak hour volumes, respectively at each intersection. The collected traffic counts can be found under **TAB ONE**.

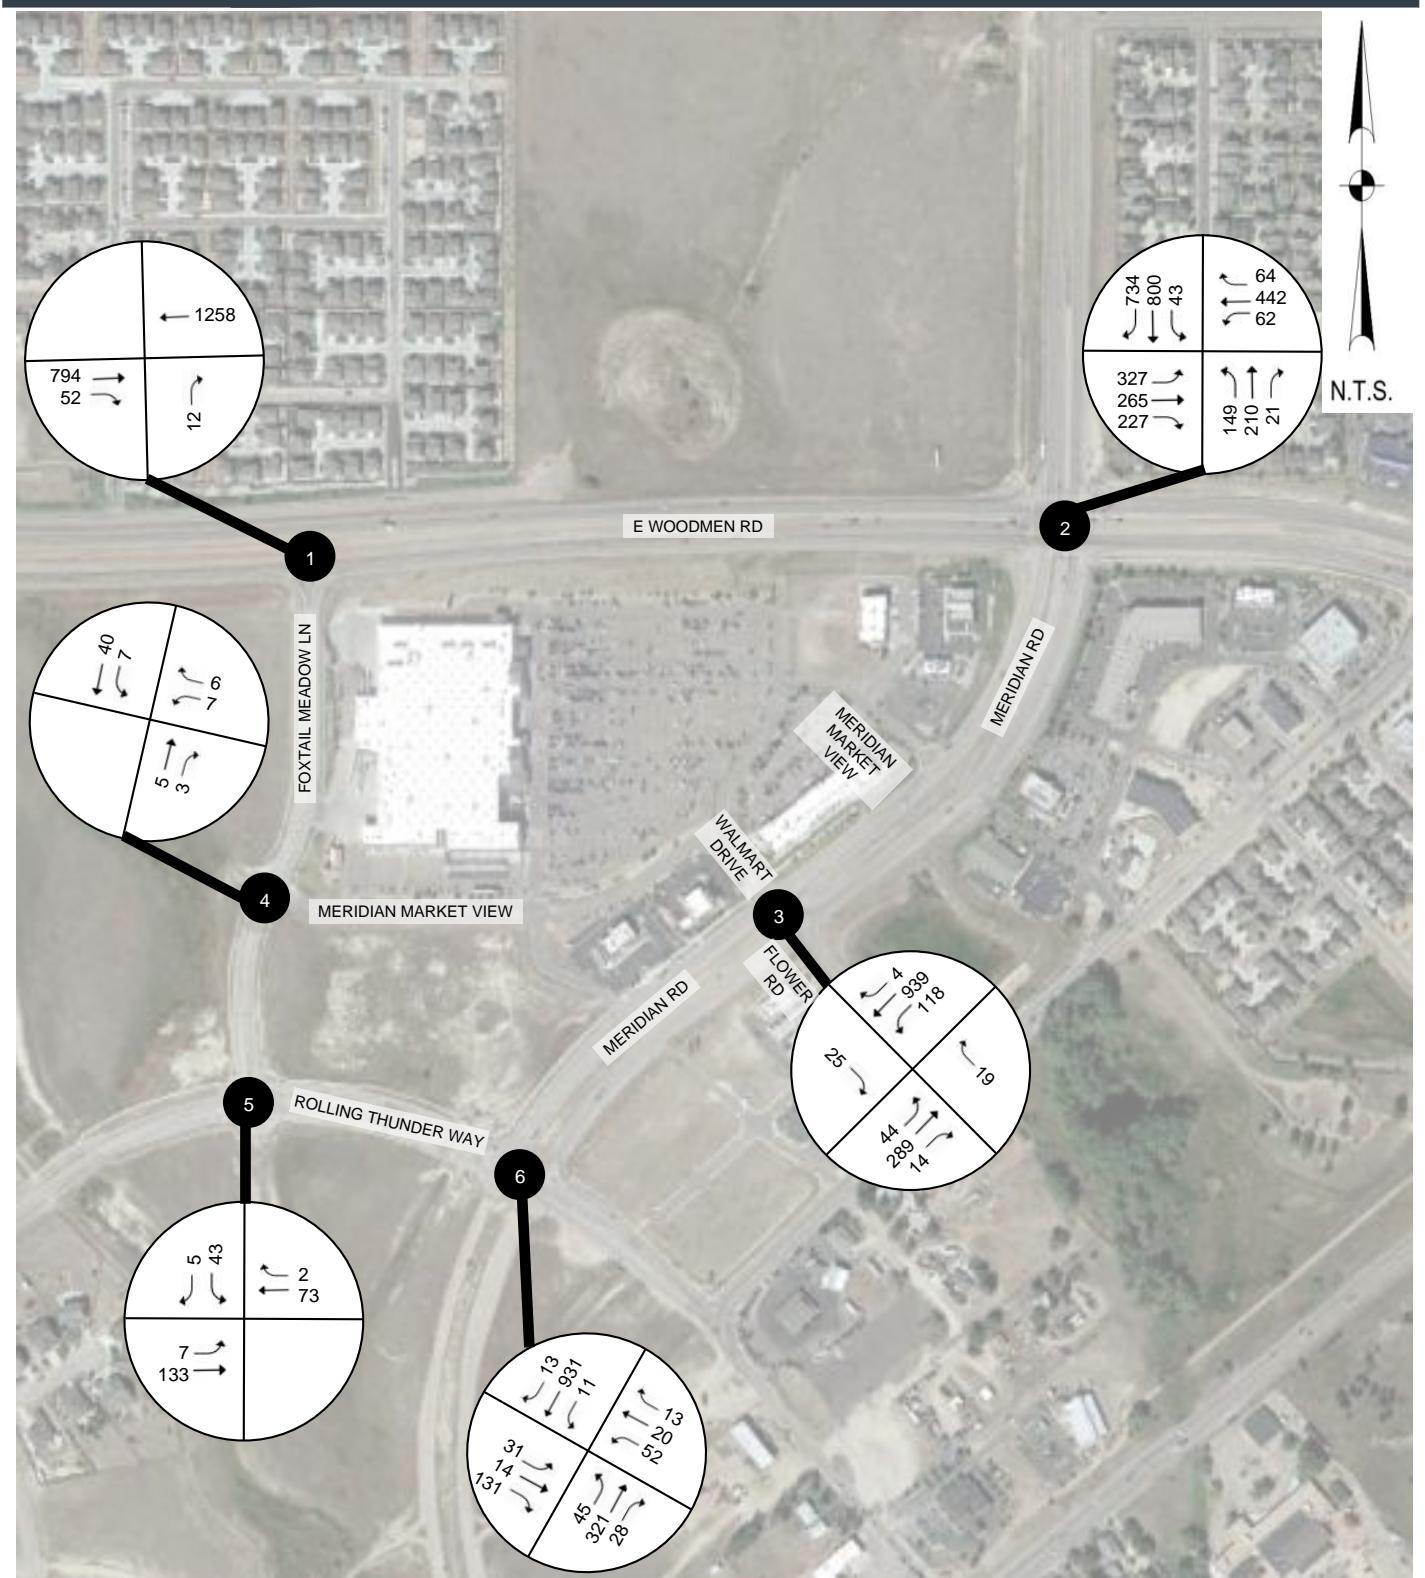

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA

Sheet Title:

EXISTING AM PEAK VOLUME 2023

WPMA P.N.:
T04-22006-05

Designed by:
TD

Figure No.

Date:
March 2023

Drawn by:
JB


3



Walter P Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

walter
p moore

713.630.7300

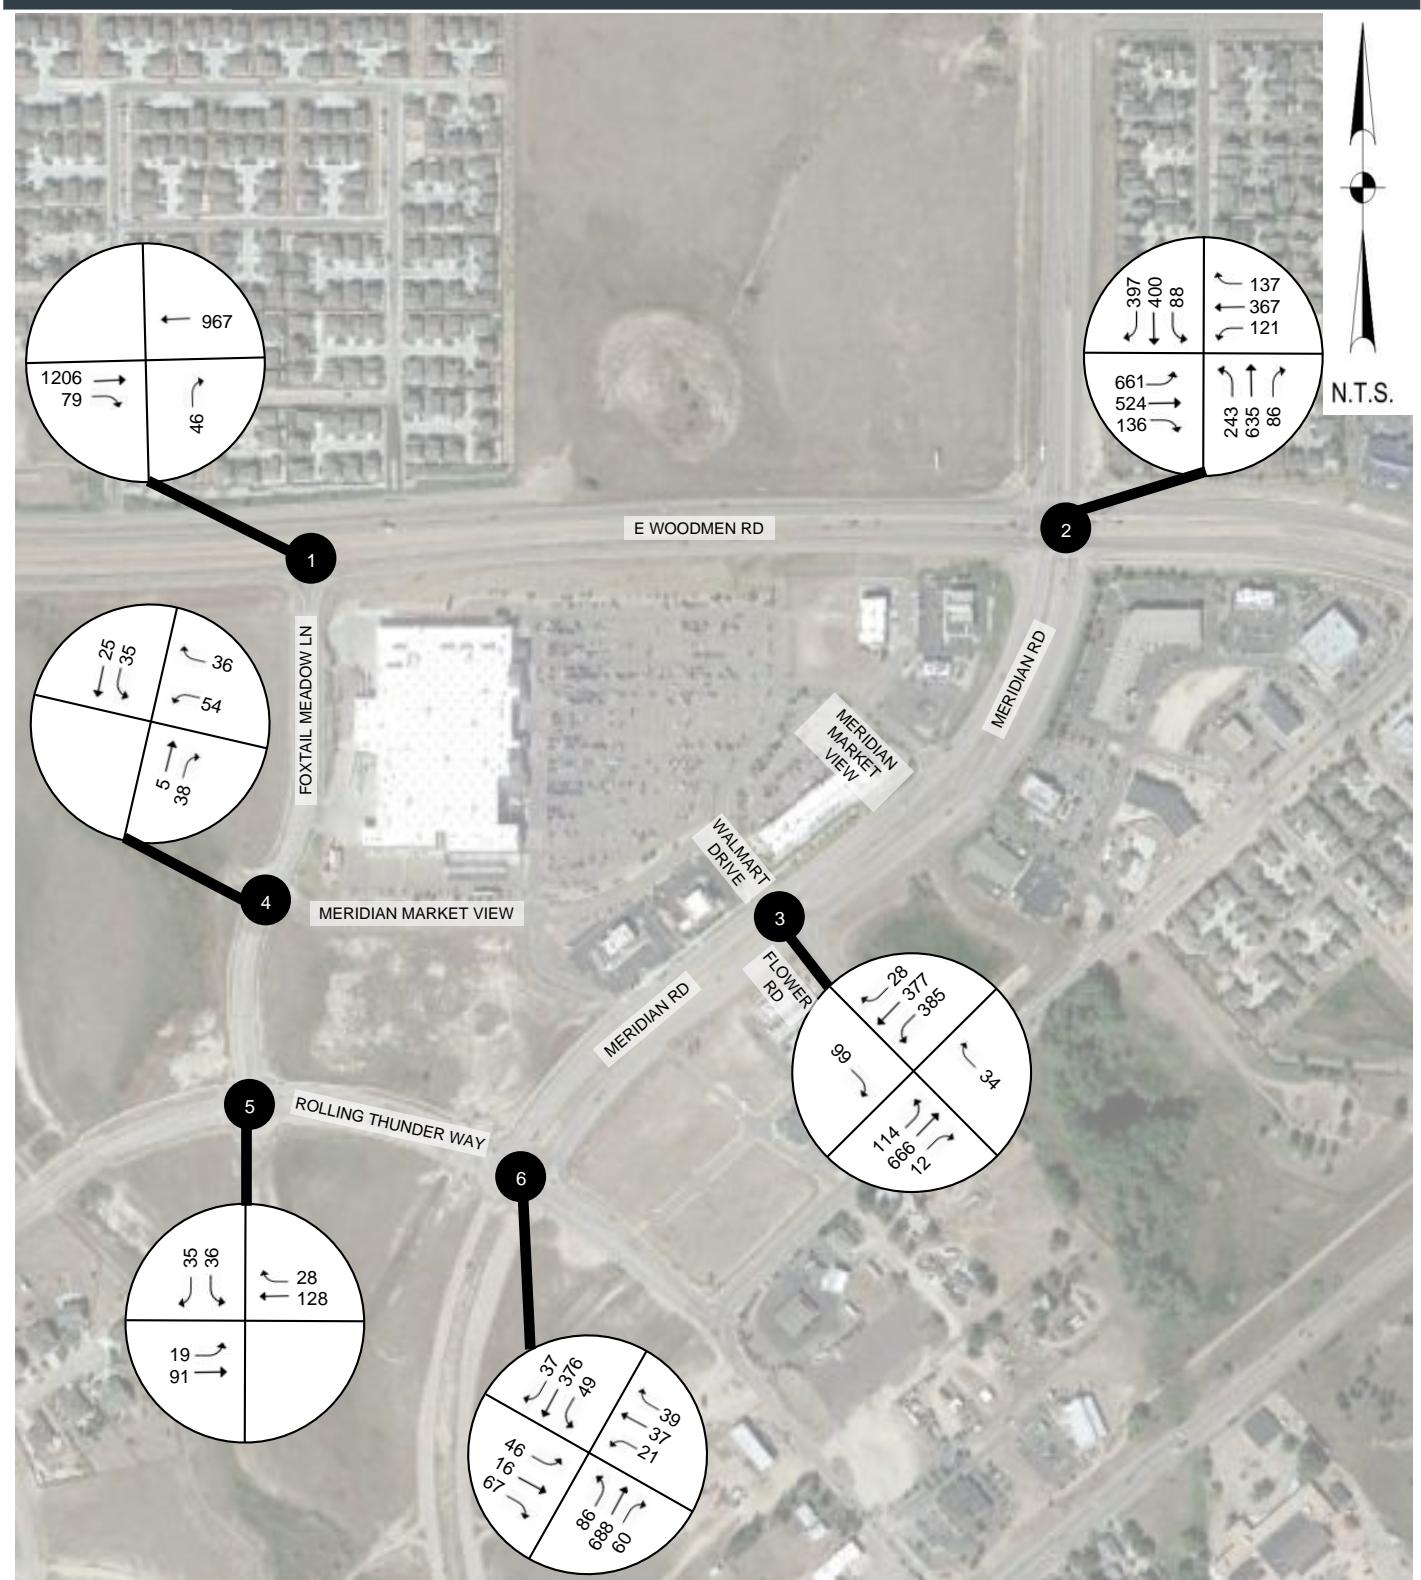

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

**walter
p moore**

713.630.7300

Sheet Title:

EXISTING PM PEAK VOLUME 2023

WPMA P.N.:
T04-22006-05

Designed by:
TD

Figure No.

Date:
March 2023

Drawn by:
JB

4

BACKGROUND DEVELOPMENTS

The known development plans that cover the study area were reviewed to determine any conflicts or relevant recommendations. Based on discussions with El Paso County representatives, no study was identified as part of background development for the analysis.

PLANNED DEVELOPMENT

SITE DEVELOPMENT

The proposed development is a fuel station and is anticipated to be completed in the year 2023. This fuel station will have a total of 16 fueling locations. The proposed site layout can be seen in **Figure 5**.

APPROPRIATENESS OF ACCESS LOCATION

Access to the site will be provided by the following existing driveway:


- Meridian Market View (Uncontrolled: Right In – Right Out)- Existing intersection on Foxtail Meadow Lane and Meridian Rd.
- Walmart Drive (Two way stop controlled)- Existing full access driveway on Flower Rd and Meridian Rd.

SITE CIRCULATION AND PARKING

The traffic would enter and exit from the south and north dwy. of the fuel station from the Meridian Market View. The location of the south and north driveways can be seen in **Image 1**. The proposed fuel station site includes ample drive isles allowing enough maneuvering space for fuel trucks and other vehicles. Fuel truck site circulation diagrams are shown in **Figure 6**.



Image 1: Driveway Location

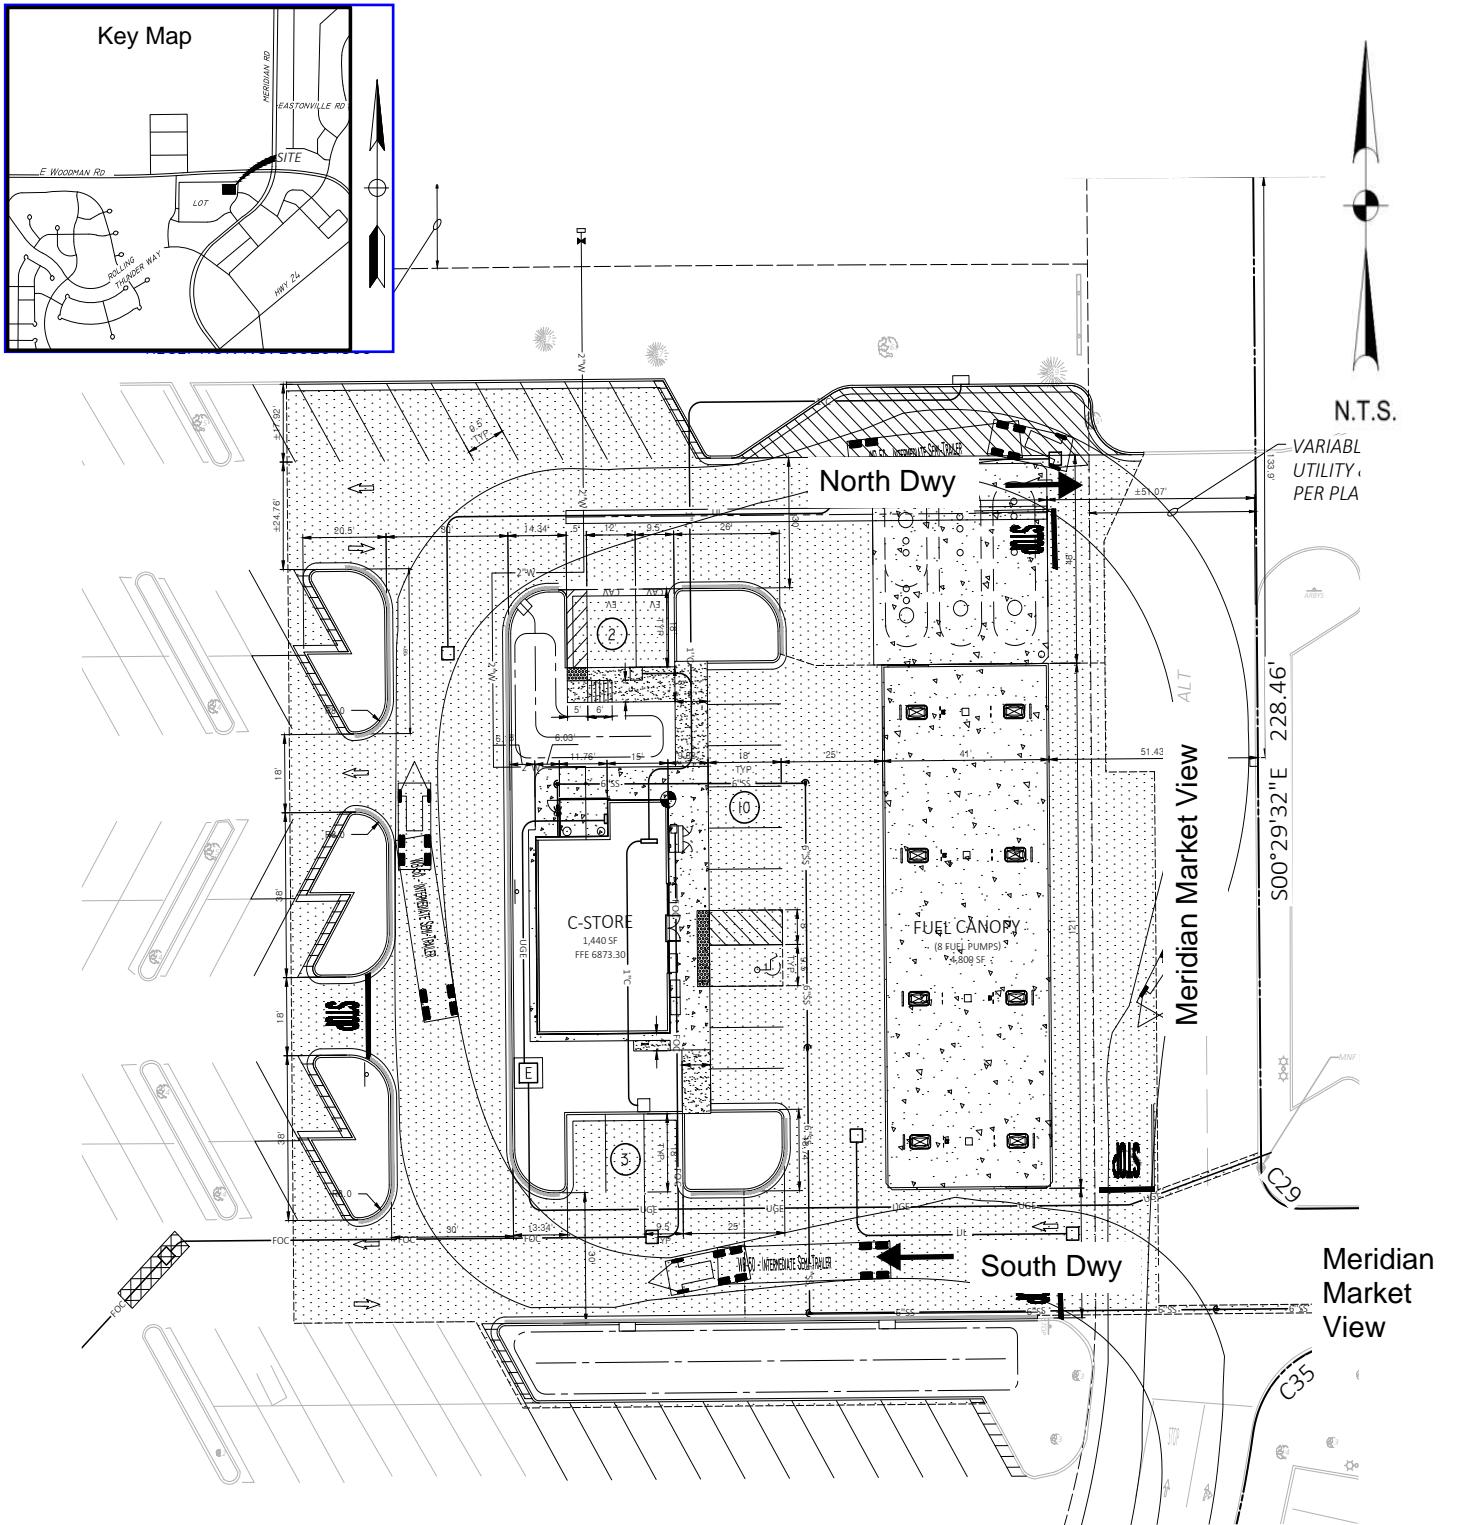

**walter
p moore**

Walter P Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

713.630.7300

Sheet Title:

PROPOSED SITE LAYOUT

WPMA P.N.:

T04-22006-05

Designed by:

TD

Figure No.


Date:

March 2023

Drawn by:

JB

5

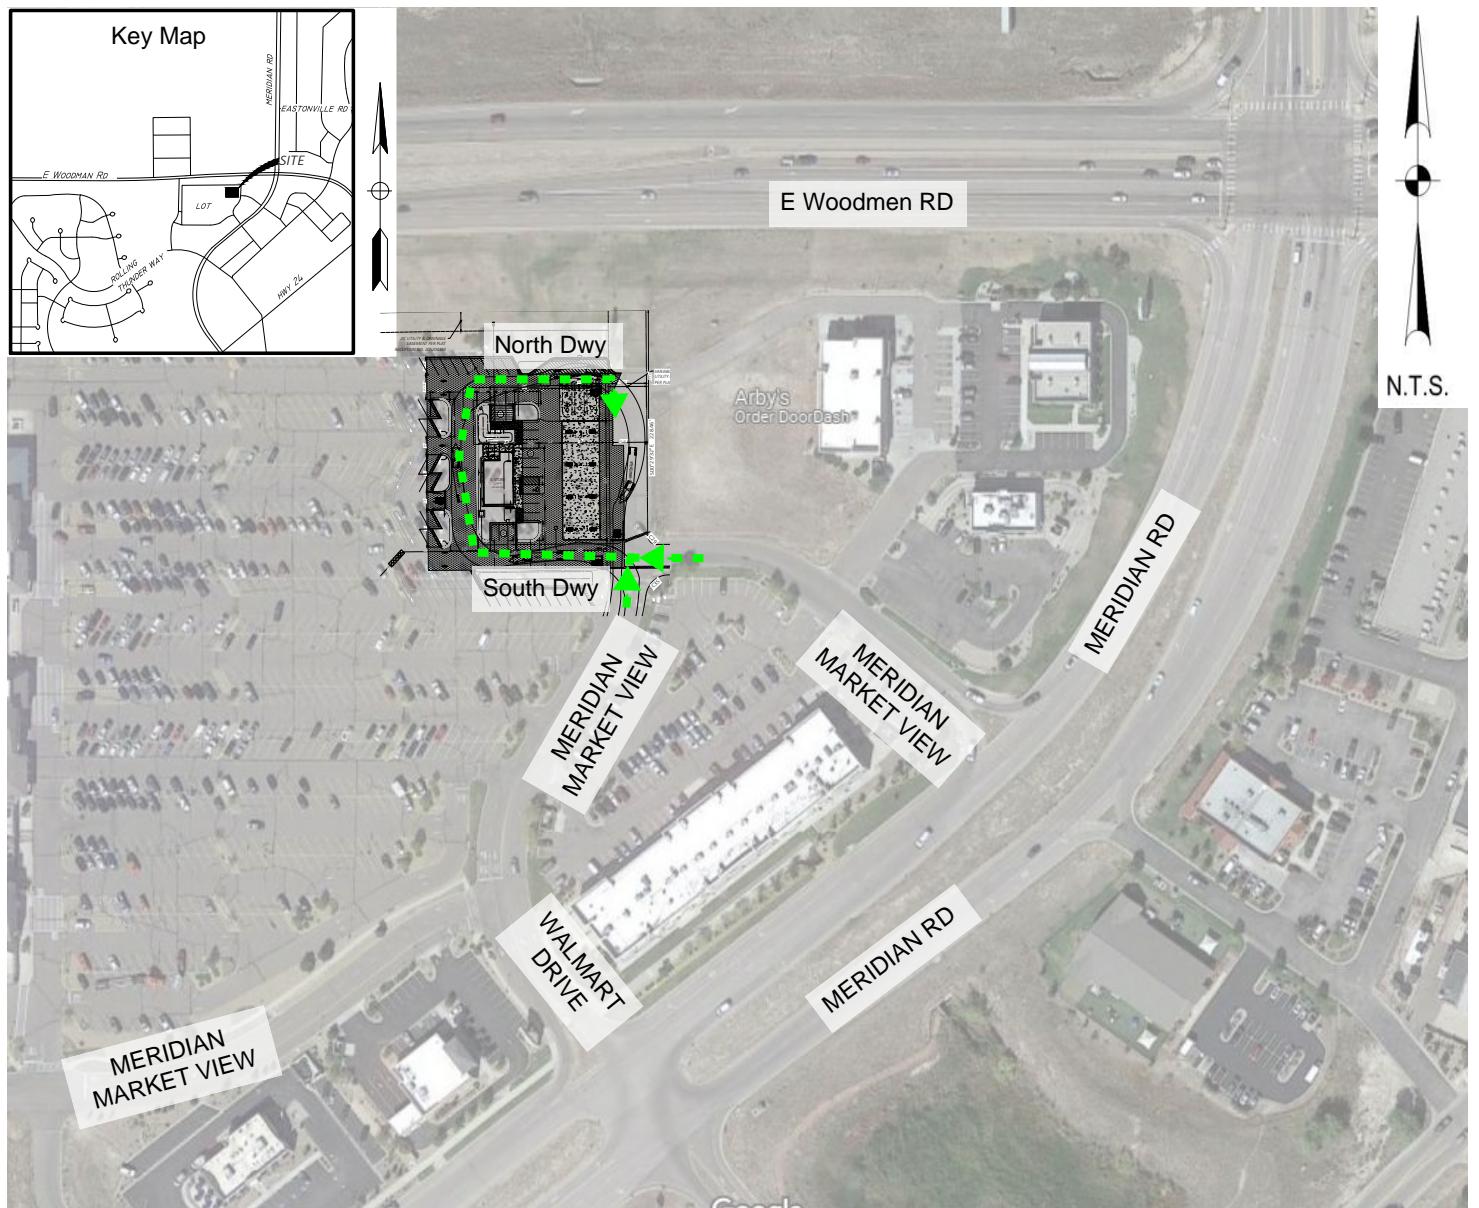

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

**walter
p moore**

713.630.7300

Sheet Title:

SITE CIRCULATION PLAN

WPMA P.N.:	Designed by:	Figure No.
T04-22006-05	TD	
Date:	Drawn by:	
March 2023	JB	

6

COMPLIANCE WITH ACCESS CONTROL POLICIES

The entry/exit points that provide access to the proposed fuel station are on Meridian Market View which is an access road that connects proposed development to the east on Meridian Rd and to the west on the Foxtail Meadow Ln. The proposed development will maintain the current control type for the access points.

STUDY METHODOLOGY

TRAFFIC SCENARIOS

The following traffic scenarios were analyzed for the AM and PM peak hour in this study:

- **Existing Conditions 2023-** Analysis of the existing traffic conditions using the existing 2023 counts, existing signal timings and site observations.
- **Proposed Conditions 2023-** Analysis of existing traffic volumes with the added site generated trips from the proposed development.

TRAFFIC SIGNAL TIMING ASSUMPTIONS

Meridian Rd and Woodmen Rd, Foxtail Meadow Ln and Rolling Thunder Way and Rolling Thunder Way and Meridian Rd are the three signalized intersections in the study area. The signal timing data for these intersections was not available, hence reasonable assumptions were made to develop the existing signal timings. The signal phases for all the movements were assumed based on NEMA standard phasing and phases 2 and 6 were assigned to the major road movements. The split timings were optimized in proportion with the existing traffic volumes.

GROWTH RATE

To project any future traffic conditions, the existing traffic counts can be forecasted for the future scenarios using a growth rate. Based on discussions with the El Paso County representatives, a growth rate of 2.0% was approved. However, the existing and proposed year is same and therefore, the growth rate is not applicable for the study.

PROJECTED CONDITIONS

TRIP GENERATION

To complete a Traffic Impact Analysis for the proposed development, the number of trips expected to be generated by the planned facilities must be determined. The number of trips generated by the development during average weekday peak hours is based on the land use type and size of the development. Standard rates for fuel stations (Land Use 944 – Service - Gasoline/Gas Station) from the Institute of Transportation Engineers (ITE) publication, *Trip Generation, 11th edition*, were used to determine the amount of traffic generated by the development. The average rate was used to estimate trips generated during AM and PM Peak Hour in accordance with the El Paso County TIA guidelines. The average trip generation rates for the proposed land uses together with the directional distribution are presented in **Table 2**.

Table 2: Trip Generation Equations

ITE Land Use		Weekday		AM Peak Hour		PM Peak Hour	
Service Gasoline/ Gas Station (944)		Regression Equation/ Average Rate		172.01		10.28	
Service Gasoline/ Gas Station (944)	Directional Distribution	Enter	Exit	Enter	Exit	Enter	Exit
		50%	50%	50%	50%	50%	50%

PASS-BY TRIP REDUCTION

Not all trips to the Fuel Station (Land Use – 944) travel directly to and from that destination (primary trips); some trips may be as a result of passing by or deliberately diverting to the gas station while travelling to another destination such as the existing Walmart store, Auto Zone, and other similar commercial developments near proposed development. These trips are called pass-by trips and should be reduced from the newly generated trips. Therefore, to account for the pass-by trip reduction the ITE *Trip Generation Manual 11th Edition* was utilized. The handbook provides a methodology that estimates the pass-by trips for different land uses and is provided in **Image 1** and **Image 2**.

Vehicle Pass-By Rates by Land Use									
Source: ITE <i>Trip Generation Manual</i> , 11th Edition									
Land Use Code	944								
Land Use	Gasoline/Service Station								
Setting	General Urban/Suburban								
Time Period	Weekday AM Peak Period								
# Data Sites	12								
Average Pass-By Rate	63%								
Pass-By Characteristics for Individual Sites									
Vehicle Fueling Positions	State or Province	Survey Year	# Interviews	Pass-By Trip (%)	Non-Pass-By Trips			Adj Street Peak Hour Volume	Source
					Primary (%)	Diverted (%)	Total (%)		
6	Maryland	1992	21	67	14	19	33	900	25
6	Maryland	1992	21	43	28	29	57	870	25
8	Maryland	1992	46	87	13	0	13	2235	25
8	Maryland	1992	35	78	9	13	22	7080	25
8	Kentucky	1993	61	60	15	25	40	4000	2
8	Kentucky	1993	48	68	13	19	32	1307	2
8	Kentucky	1993	—	56	22	22	44	1211	2
8	Maryland	1992	36	47	14	39	53	3095	25
8	Maryland	1992	46	75	0	25	25	3770	25
10	Kentucky	1993	47	67	11	22	33	1105	2
10	Kentucky	1993	—	46	42	12	54	1211	2
12	Maryland	1992	36	61	8	31	39	3480	25

Image 2: Pass-by trips Reduction AM Peak

Vehicle Pass-By Rates by Land Use								
Source: ITE <i>Trip Generation Manual</i> , 11th Edition								
Land Use Code	944							
Land Use	Gasoline/Service Station							
Setting	General Urban/Suburban							
Time Period	Weekday PM Peak Period							
# Data Sites	17							
Average Pass-By Rate	57%							
Pass-By Characteristics for Individual Sites								
Vehicle Fueling Positions	State or Province	Survey Year	# Interviews	Pass-By Trip (%)	Primary (%)	Diverted (%)	Total (%)	Adj Street Peak Hour Volume
6	Maryland	1992	18	61	6	33	39	2510
6	Maryland	1992	26	58	11	31	42	1020
8	Maryland	1992	47	62	23	15	38	2635
8	Kentucky	1993	83	52	8	40	48	4965
8	Kentucky	1993	60	53	20	27	47	1491
8	Kentucky	1993	—	72	7	21	28	2657
8	Maryland	1992	36	67	14	19	33	3095
8	Maryland	1992	46	46	11	43	54	3770
8	Maryland	1992	35	54	3	43	46	7080
10	Kentucky	1993	—	57	19	24	43	1812
10	Kentucky	1993	—	55	16	29	45	2657
12	Maryland	1992	52	38	10	52	62	3835
12	Pennsylvania	2009	—	66	—	—	34	—
12	Pennsylvania	2009	—	51	—	—	49	—
12	Pennsylvania	2009	—	40	—	—	60	—
12	Pennsylvania	2009	—	61	—	—	39	—
12	New Jersey	2009	—	73	—	—	27	—

Image 3: Pass-by trips Reduction PM Peak

Once calculated, the pass-by trips are then subtracted from the trip generation. Since ITE does not have data for 16 vehicle fueling positions, the average pass by rates were considered. It was estimated that the number of pass-by trips was 102 for the AM peak hour and 125 for the PM peak hour. **Table 3** shows a summary of the trips generated by the proposed development in the study area after the pass-by trip reduction.

Table 3: Trip Generation Volumes

Trip Generation Land Use	Size ¹	Unit	A.M. Peak			P.M. Peak		
			Total	Enter	Exit	Total	Enter	Exit
PROPOSED 2023								
Service Gasoline/ Gas Station (944)	16	No. of Fueling Positions	62	31	31	98	49	49

¹Information Provided by Owner

TRIP DISTRIBUTION

After determining the number of trips generated by the proposed development, the trips were distributed among roadways accessing the site using a combination of existing and expected travel patterns. This process involves examining the roadways and the expected travel patterns between the site and other trip ends, based on available routes in the study area. All traffic assignments were made over the most reasonable routes for each direction. Based on the traffic patterns, the following assumptions were made:

- For the inbound traffic in AM peak, 72% of traffic would come from north on Meridian Rd, 25% from south of which 21% comes from northbound through movement and 4% comes from eastbound left movement at Rolling Thunder Way and Meridian Rd intersection. The remaining 3% will come on Meridian Market View from Foxtail Meadow Ln.
- For the inbound traffic in PM peaks, 43% of traffic would come from north on Meridian Rd, 54% from south of which 45% comes from northbound through traffic, 4% from eastbound left and 5% from westbound right at Rolling Thunder Way and Meridian Rd intersection respectively. The remaining 3% will come on Meridian Market View from Foxtail Meadow Ln.
- Among the driveways, the split for inbound for AM traffic would be as follows:
 - Meridian Market View and Meridian Rd (Right – In, Right – Out): 72%.
 - WM Drive and Meridian Rd (Uncontrolled): 25%.
 - Meridian Market View and Foxtail Meadow Ln (Two way stop): 3%.
- Among the driveways, the split for inbound for PM traffic would be as follows:
 - Meridian Market View and Meridian Rd (Right – In, Right – Out): 43%.
 - WM Drive and Meridian Rd (Uncontrolled): 54%.
 - Meridian Market View and Foxtail Meadow Ln (Two way stop): 3%.
- For the outbound traffic in AM peak, 28% exits towards north of which 18% exits towards northbound on Meridian Rd & 10% exits towards northbound left on Woodmen Rd respectively. The remaining 72% exit southbound through Meridian Rd.
- For the outbound traffic in PM peak, 66% exit towards north of which 43% would exit towards Meridian Rd northbound through, 15% towards northbound left, & 8% towards

northbound right on Woodmen Rd respectively. The remaining 34% exit towards south of which 25% exit towards southbound through, 5% exit towards southbound left & 4% would exit towards southbound right on Rolling Thunder Way respectively.

- Among the driveways, the split for outbound for AM traffic would be as follows:
 - Meridian Market View and Meridian Rd (Right – In, Right – Out): 28%.
 - WM Drive and Meridian Rd (Uncontrolled): 72%.
- Among the driveways, the split for outbound for PM traffic would be as follows:
 - Meridian Market View and Meridian Rd (Right – In, Right – Out): 57%.
 - WM Drive and Meridian Rd (Uncontrolled): 43%.


Figure 7 and **Figure 8** illustrate the proposed trip distribution for the AM peak hour and PM peak hour of the development. **Figures 9** and **10** show the site generated trips for the AM peak hour and PM peak hour of the development, respectively.

TRAFFIC ANALYSIS

After developing the projected turning movement volumes for the AM peak hour and PM peak hour, capacity analyses were performed for existing conditions, and proposed conditions.

Intersection operations were analyzed using *Synchro 11.0*, software developed to automate procedures found in the *Highway Capacity Manual*. Results of the existing and proposed conditions analyses were compared to determine the impact of the proposed development on the surrounding roadways.

Results of the capacity analyses are reported in standard level of service (LOS) format, with the most favorable conditions being designated as LOS A and the poorest conditions indicated by LOS F. Intersection level of service is based on the average delay that each vehicle encounters at a given intersection. The level of service criteria for signalized intersections, along with a brief description of the conditions experienced for each level of service grade, can be seen in **Table 4**. The level of service criteria for unsignalized intersections can be seen in **Table 5**.

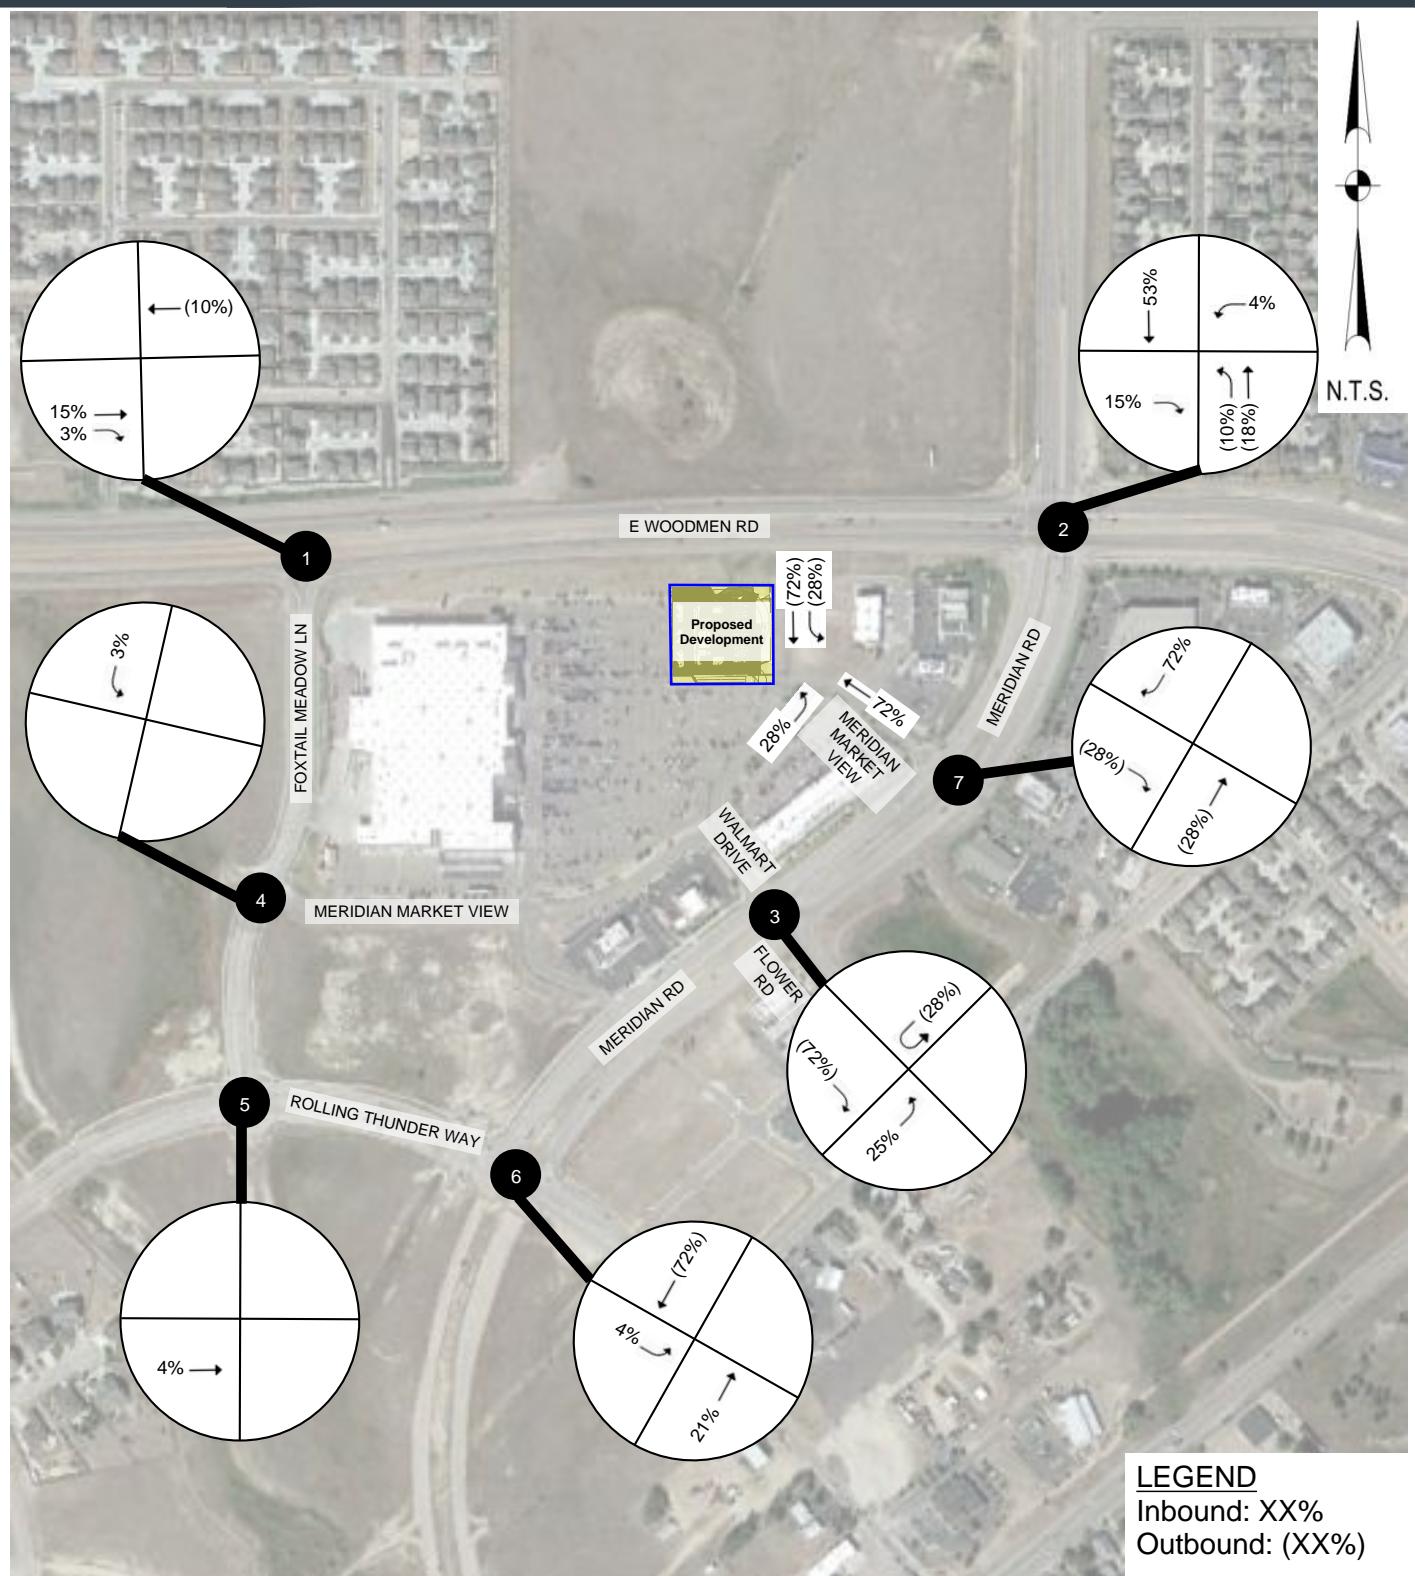

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P. Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

walter
p moore

713.630.7300


Sheet Title:

PROPOSED TRIP DISTRIBUTION AM PEAK HOUR

WPMA P.N.:	Designed by:	Figure No.
T04-22006-05	TD	

Date:	Drawn by:
March 2023	JB

7

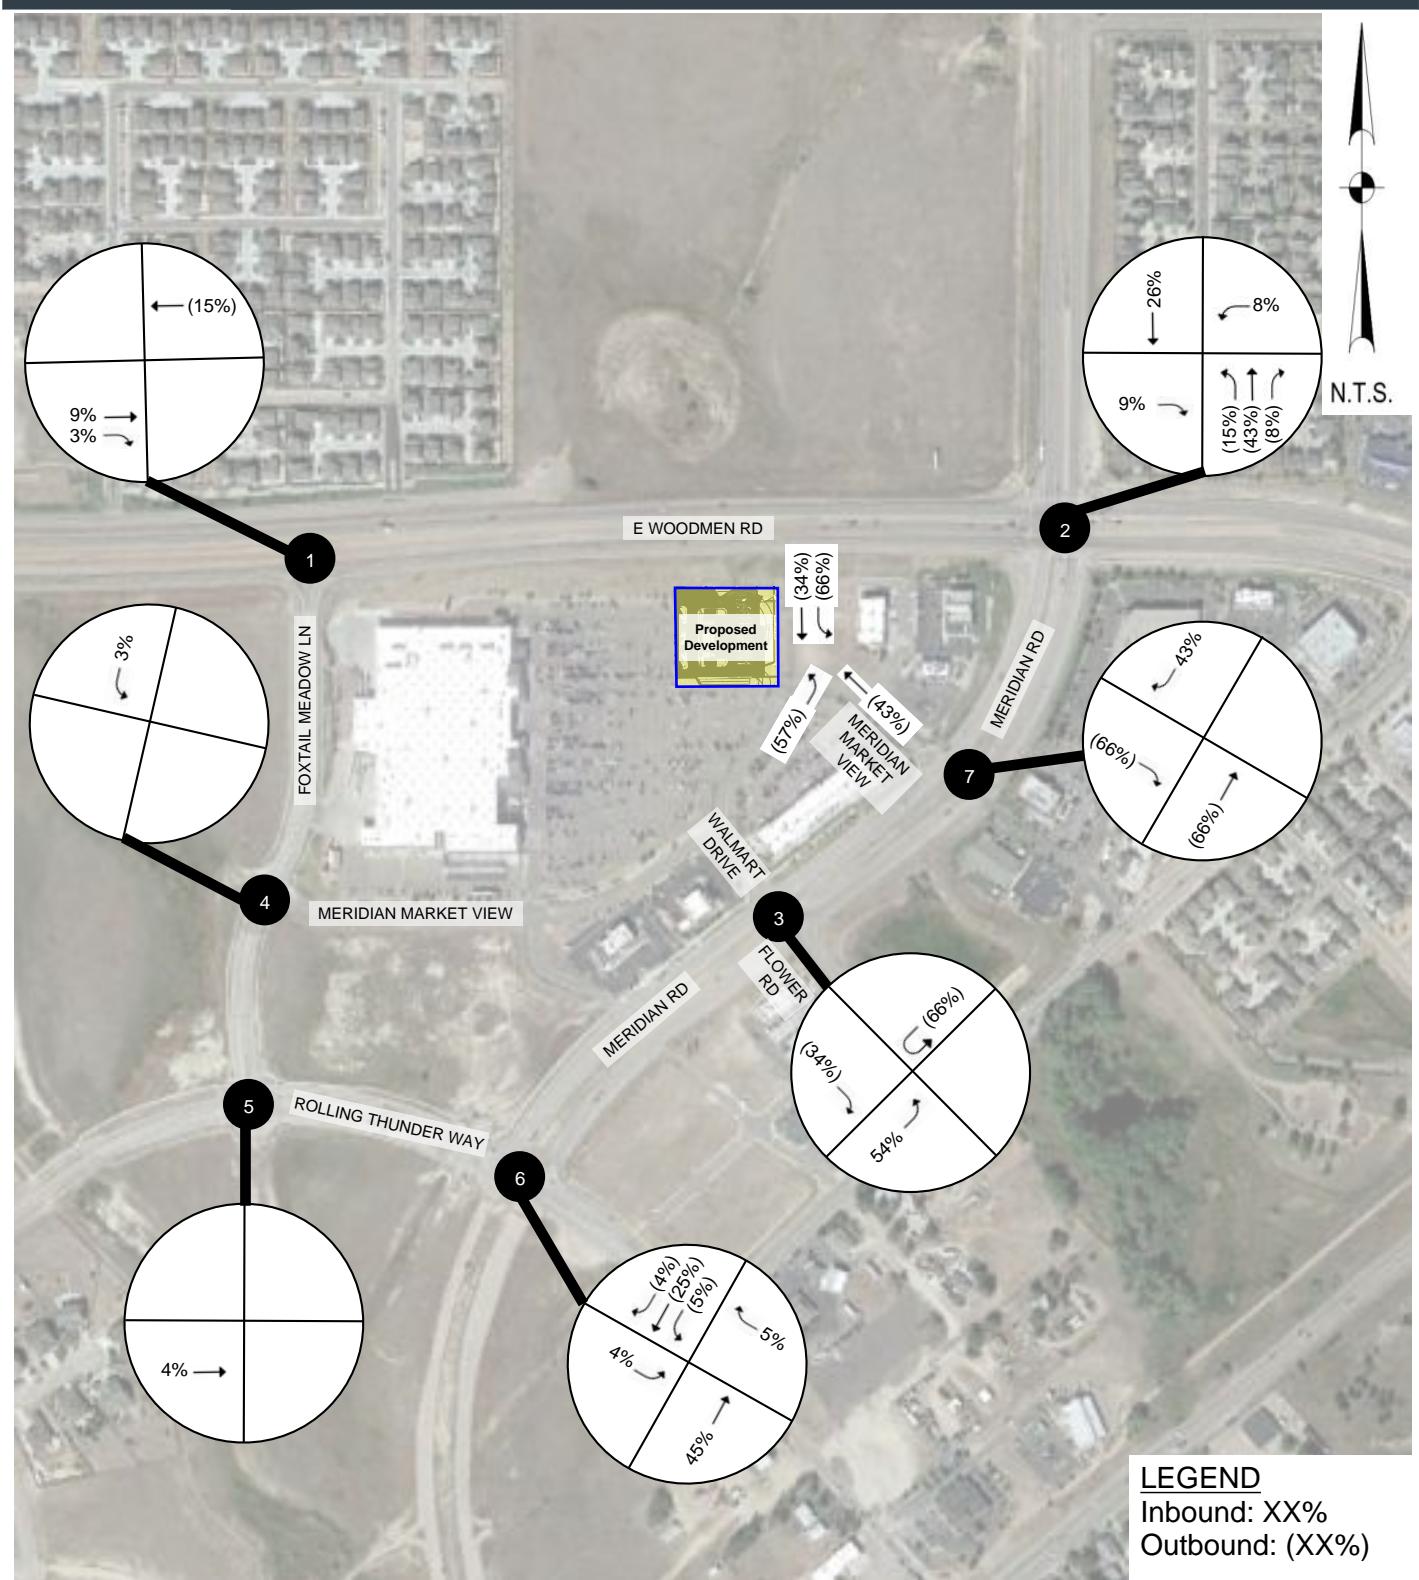

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P. Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

walter
p moore

713.630.7300

Sheet Title:

PROPOSED TRIP DISTRIBUTION PM PEAK HOUR

WPMA P.N.:
T04-22006-05


Designed by:
TD

Figure No.

Date:
March 2023

Drawn by:
JB

8

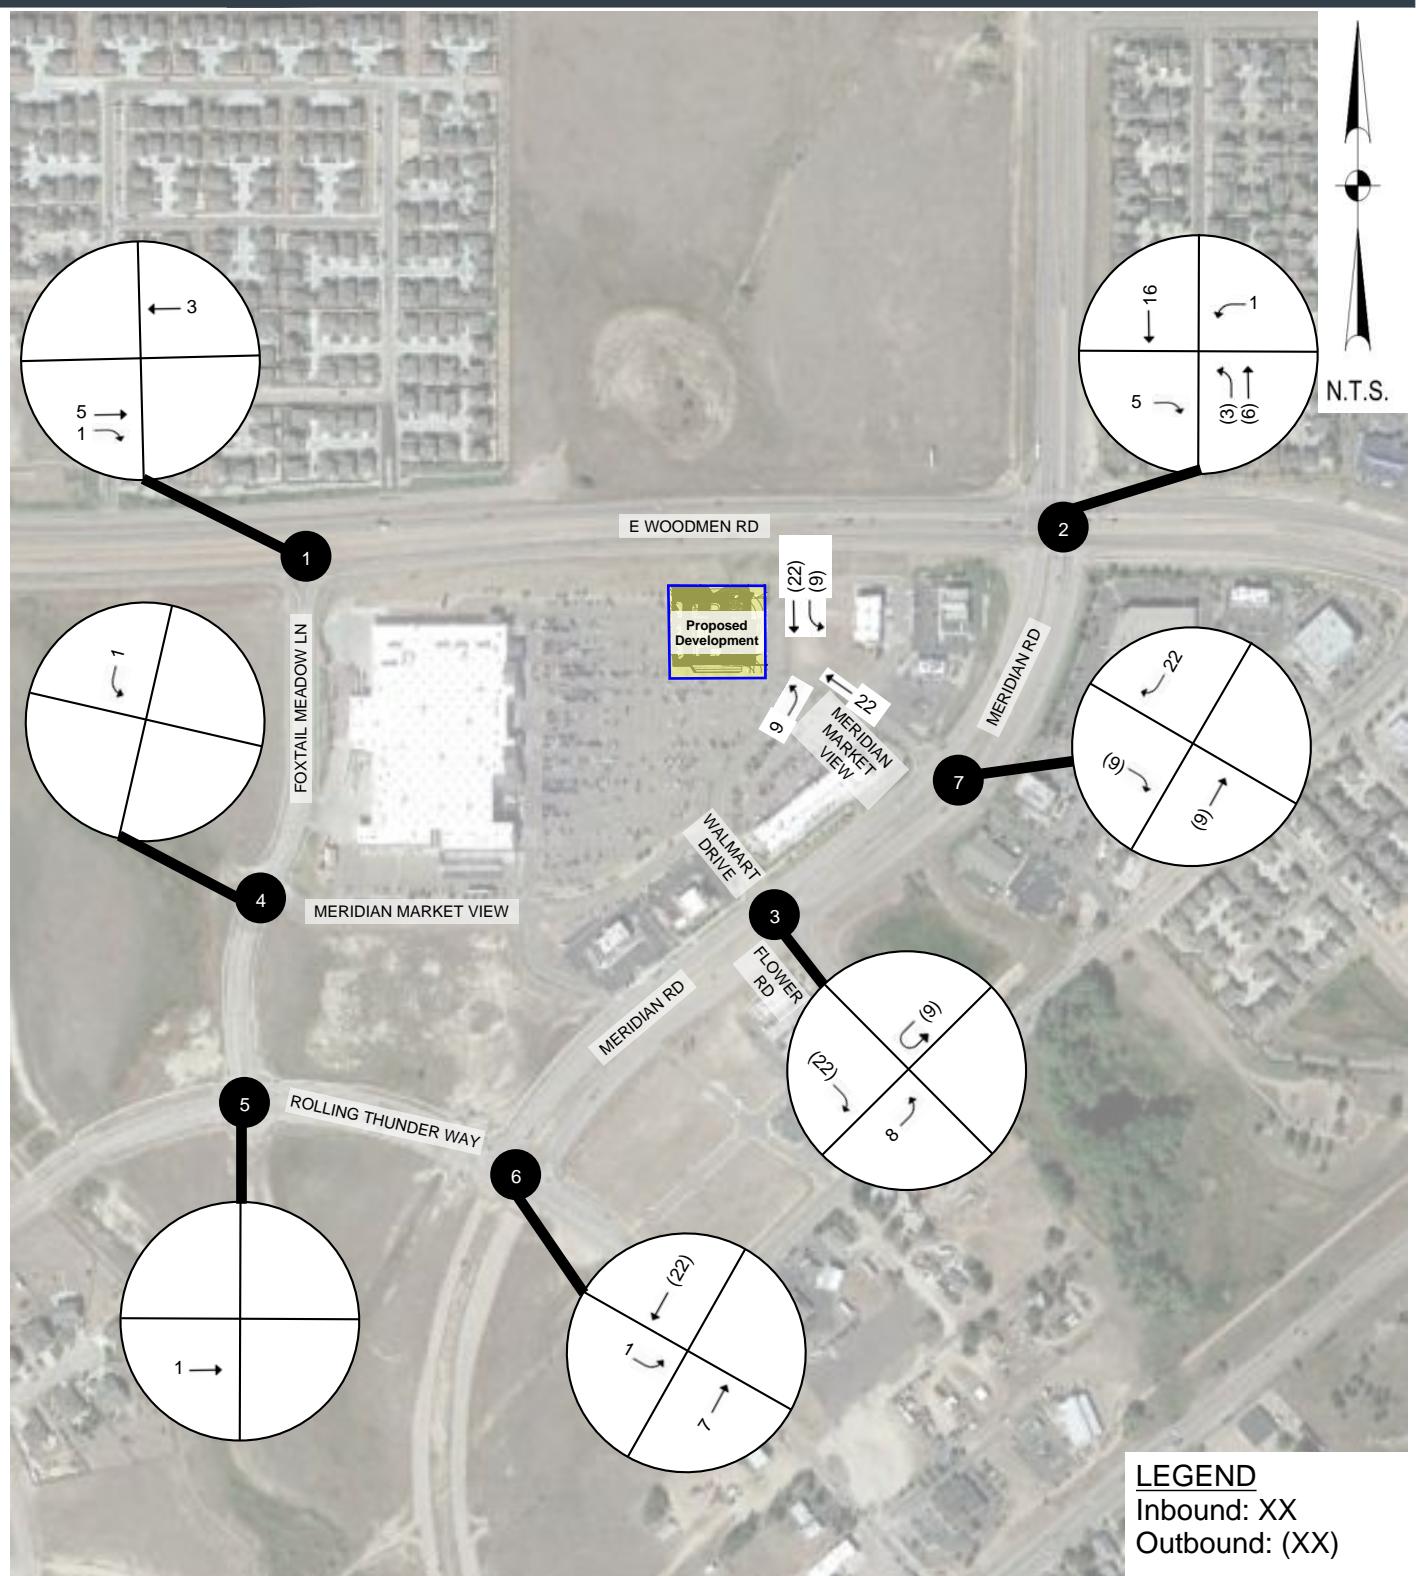

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P. Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

walter
p moore

713.630.7300


Sheet Title:

SITE GENERATED TRIPS AM PEAK HOUR

WPMA P.N.: T04-22006-05	Designed by: TD	Figure No.
----------------------------	--------------------	------------

Date: March 2023	Drawn by: JB
---------------------	-----------------

9

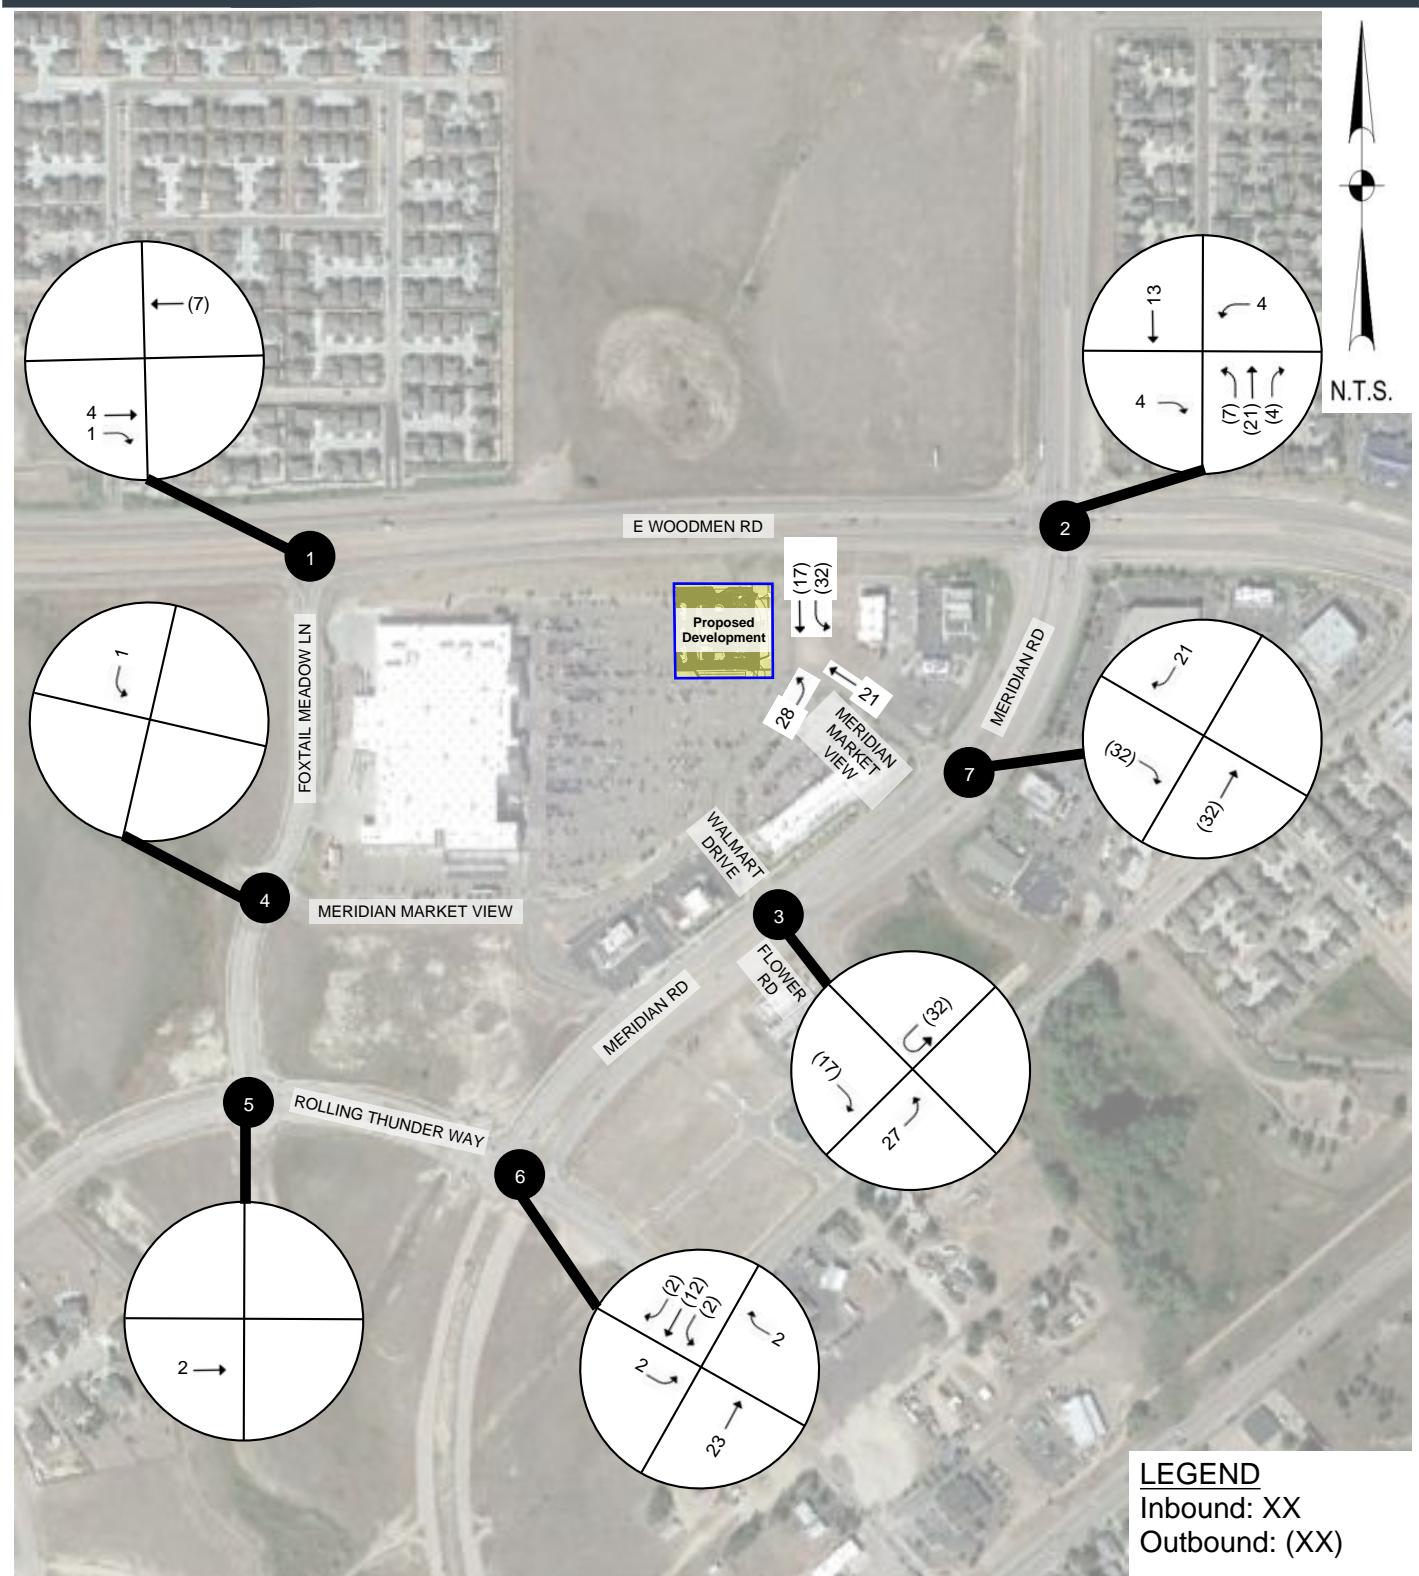

Project Name:

WALMART STORE #4335-543 FUEL STATION TIA



Walter P. Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

**walter
p moore**

713.630.7300

Sheet Title:

SITE GENERATED TRIPS PM PEAK HOUR

WPMA P.N.:
T04-22006-05

Designed by:
TD

Figure No.

Date:
March 2023

Drawn by:
JB

10

Table 4: Level of Service Criteria for Signalized Intersections

Level of Service	Stopped Delay (seconds/vehicle)	Description
A	≤ 10	At a single intersection most vehicles do not stop at all. When linked with other signals, vehicles progress through intersections without stopping.
B	$> 10 \text{ and } \leq 20$	At a single intersection some vehicles stop before getting a green signal. When linked with other signals, some cars may have to stop but most progress through the intersection without stopping.
C	$> 20 \text{ and } \leq 35$	At a single intersection, a significant number of vehicles must stop and wait for a green signal. Some vehicles may have to wait through one full signal cycle before being able to move through the intersection.
D	$> 35 \text{ and } \leq 55$	At this level, congestion is noticeable. Many vehicles have to stop while waiting for a green signal. A noticeable number of vehicles have to wait through one full cycle before being able to continue through the intersection.
E	$> 55 \text{ and } \leq 80$	At this level, almost all vehicles have to wait through one or more full signal cycles before moving through the intersection. When linked with other signals, progression is slow.
F	> 80	At this level, the number of vehicles entering the intersection exceeds its capacity. Vehicles have to wait through multiple full signal cycles before moving through the intersection.

Table 5: Level of Service Criteria for Unsignalized Intersections

Level of Service	Avg. Total Delay (seconds/vehicle)	Description
A	≤ 10	At most, one vehicle is waiting to move through the intersection when the driver reaches the stop sign. Most often, the driver pulls up to the stop sign and is immediately free to proceed through the intersection.
B	$> 10 \text{ and } \leq 15$	When the driver reaches the intersection, one or two vehicles are in front of him. Once those vehicles proceed through the intersection, the driver is able to continue without opposition.
C	$> 15 \text{ and } \leq 25$	At this level, several vehicles may be in front of the driver at a two-way stop-controlled intersection. At an all-way stop-controlled intersection, there may be two or more vehicles at each approach that the driver has to wait for before getting his turn.
D	$> 25 \text{ and } \leq 35$	At this level, there are at least four vehicles in front of the driver and several vehicles at the other approaches. Also, for two-way stop-controlled conditions, the volume of traffic on the uncontrolled street may be high.
E	$> 35 \text{ and } \leq 50$	When the driver reaches the intersection, there are between five and eight vehicles in front of him and many vehicles at the other approaches that must also proceed through the intersection before the driver may continue.
F	> 50	At this level, the driver must wait for eight to ten cars at his approach to move through the intersection along with at least five vehicles at the other approaches. This level can also occur at two-way stop-controlled intersections when the uncontrolled street has such a high volume that no gaps are available in the traffic stream for the vehicles at the cross street to continue.

Transportation agencies generally consider operations at or above LOS C to be acceptable. In more dense areas, operations at or above LOS D may also be considered acceptable during peak traffic hours.


EXISTING CONDITIONS (2023)


For the analysis of existing conditions, existing traffic count data along with traffic signal timings based on reasonable assumptions were used. Existing AM peak hour and PM peak hour volumes can be seen in **Figures 3 and 4**. Existing conditions capacity analyses can be found under **TAB Two**.

PROPOSED CONDITIONS (2023)

For the analysis of the proposed conditions, the proposed traffic volumes along with current traffic signal timings used in Existing conditions were used. The proposed AM peak hour and PM peak hour volumes can be seen in **Figures 11 and 12**. Proposed conditions capacity analyses can be found under **TAB THREE**.

A comparison of existing, and proposed AM peak hour and PM peak hour level of service and delay can be found in **Table 6** and **Table 7**.

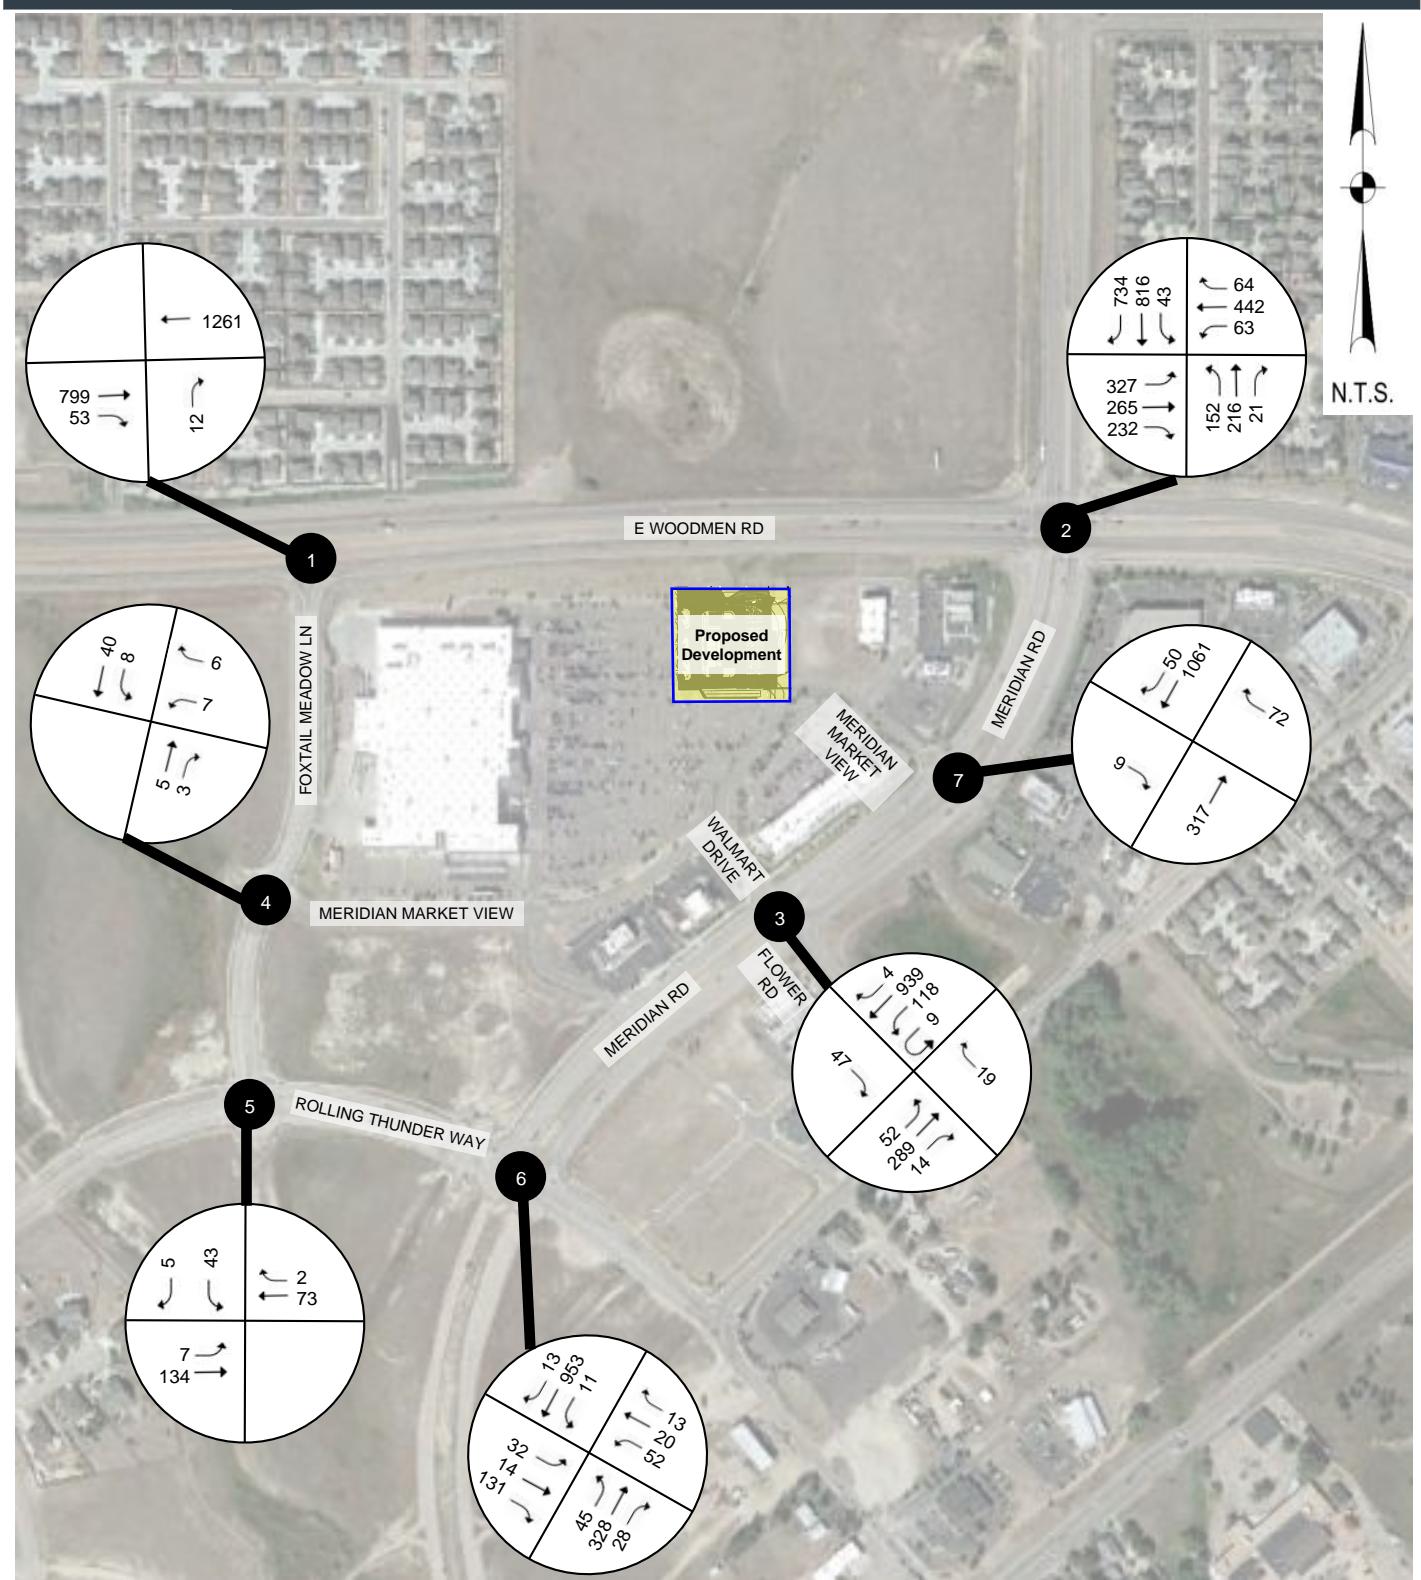

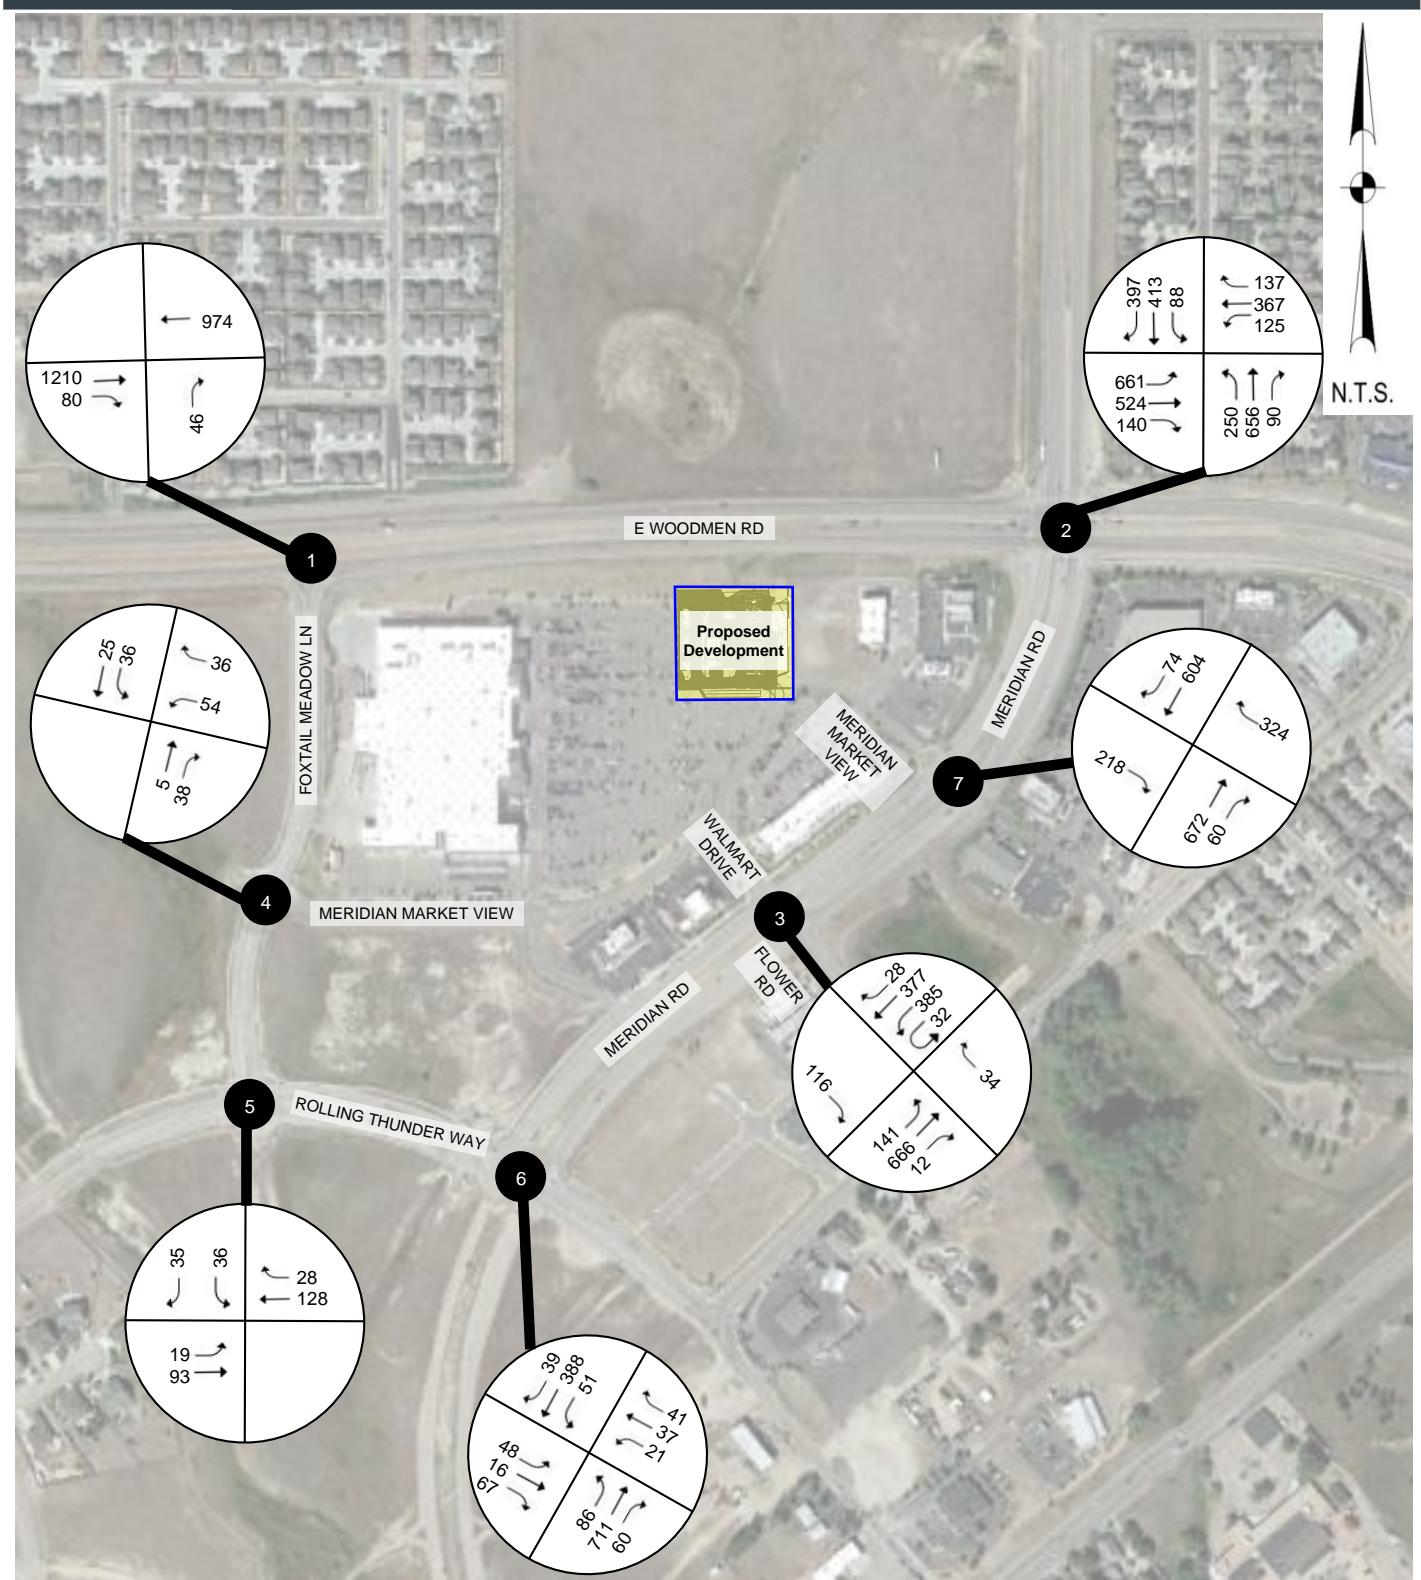

Walter P. Moore and Associates, Inc.
1301 McKinney, Suite 1100
Houston, Texas 77010

**walter
p moore**

713.630.7300

Sheet Title:

PROPOSED PM PEAK VOLUME 2023

WPMA P.N.:	Designed by:	Figure No.
T04-22006-05	TD	
Date:	Drawn by:	
March 2023	JB	

12

Table 6: Level of Service Comparison – AM Peak Hour

S. No.	Intersection Name	Type of Intersection	Existing AM 2023		Proposed AM 2023	
			Intersection LOS	Intersection delay (sec/veh)	Intersection LOS	Intersection delay (sec/veh)
1	Woodmen Rd and Foxtail Meadow Ln*	Uncontrolled	A	0.4	A	0.4
2	Meridian Rd and Woodmen Rd**	Signalized	D	44.4	D	44.3
3	Meridian Rd and WM Drive**	Two-way stop	A	1.1	A	1.2
4	Foxtail Meadow Ln and Meridian Market View**	Two-way stop	A	2.4	A	2.5
5	Foxtail Meadow Ln and Rolling Thunder Way**	Signalized	A	7.7	A	7.6
6	Rolling Thunder Way and Meridian Rd**	Signalized	C	24.5	C	25.0
7	Meridian Market View and Meridian Rd*	Uncontrolled	A	0.33	A	0.39

Legend:

	LOS A, B, C or D
	LOS E
	LOS F

* Intersection Capacity Utilization (ICU Delay)

** HCM Delay

Table 7: Level of Service Comparison - PM Peak Hour

S. No.	Intersection Name	Type of Intersection	Existing PM 2023		Proposed PM 2023	
			Intersection LOS	Intersection delay (sec/veh)	Intersection LOS	Intersection delay (sec/veh)
1	Woodmen Rd and Foxtail Meadow Ln*	Uncontrolled	A	0.43	A	0.43
2	Meridian Rd and Woodmen Rd**	Signalized	D	49.1	D	49.6
3	Meridian Rd and WM Drive**	Two-way stop	A	3.9	A	4.3
4	Foxtail Meadow Ln and Meridian Market View**	Two-way stop	A	5.7	A	5.7
5	Foxtail Meadow Ln and Rolling Thunder Way**	Signalized	A	8.0	A	8.0
6	Rolling Thunder Way and Meridian Rd**	Signalized	C	21.1	C	21.4
7	Meridian Market View and Meridian Rd*	Uncontrolled	A	0.44	A	0.45

Legend:

	LOS A, B, C or D
	LOS E
	LOS F

* Intersection Capacity Utilization (ICU Delay)

** HCM Delay

LEVEL OF SERVICE COMPARISON

The following is a summary of findings at the study intersections based on the analysis conducted as part of this traffic impact analysis:

AM Peak Hour

- The signalized intersections perform at the accepted level of service LOS D or better in all the scenarios.
- All unsignalized intersections stay at the same level of service LOS A in all the scenarios.

PM Peak Hour

- The signalized intersections perform at the accepted level of service LOS D or better in all the scenarios.
- All unsignalized intersections stay at the same level of service LOS A in all the scenarios.

QUEUE ANALYSIS

Following the level of service comparison, a queue length analysis was performed for the turning movements at the study intersections. The queue analysis does not show a significant increase in the 95th percentile length of the intersections and therefore no additional turn lane is required nor there is any need to increase length of any existing turn lanes. The details of the 95th percentile queue lengths and existing turn length at the intersections of AM peak hour and PM peak hour can be found in **TAB FOUR**.

MITIGATION ANALYSIS

Based on the level of service comparisons, all intersections perform at an acceptable level of service in both the scenarios. Therefore, no mitigations are required.

CONCLUSIONS AND RECOMMENDATIONS

As requested by CEI, Walter P Moore conducted a traffic impact analysis for the proposed fuel station at the Walmart Store #4335-543 in Falcon, CO. The purpose of the study was to determine the potential impacts to traffic operations in the area related to the proposed development. Transportation and site improvements to mitigate impacts were investigated, if necessary. The following is a summary of the study:

- The proposed site will include a fuel station having 16 fueling locations.
- Based on the level of service comparisons, all intersections will perform at an acceptable level of service after the development is built. Therefore, no mitigations are required.

REFERENCES

1. *Trip Generation Manual, 11th Edition.* Institute of Transportation Engineers.
2. *Highway Capacity Manual, 6th Edition.* Transportation Research Board.

Tab One

Existing Traffic Volumes 2023

Count Location: 1. Woodmen Rd at Foxtail Meadow

Count Date: Tuesday, January 10, 2023

Weather Conditions:

Road Surface Condition:

Names of Counters: Ridgeview Data Collection

Time	A.M. PEAK PERIOD										Vehicle Total												
	Eastbound Woodmen Road					Westbound S Chambers Rd						Northbound S Parker Rd					Southbound S Parker Rd						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
7:00	201	12		0	0	351			0		566	0	2										
7:15	200	8		0	0	352			0		562	0	2										
7:30	182	12		0	0	311			0		512	0	7										
7:45	211	20		0	0	244			0		476	0	1										
8:00	188	17		0	0	205			0		412	0	2										
8:15	166	21		0	0	147			0		336	0	2										
8:30	191	14		0	0	215			0		422	0	2										
8:45	156	10		0	0	135			0		305	0	4										

Time	P.M. PEAK PERIOD										Vehicle Total												
	Eastbound Woodmen Road					Westbound S Chambers Rd						Northbound S Parker Rd					Southbound S Parker Rd						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:00	296	38	0	0	0	306			0		649	0	9										
16:15	285	29	0	0	0	217			0		544	0	13										
16:30	291	18	0	0	0	267			0		588	0	12										
16:45	329	19	0	0	0	222			0		575	0	5										
17:00	301	13	0	0	0	261			0		591	0	16										
17:15	342	14	0	0	0	224			0		588	0	8										
17:30	337	21	0	0	0	206			0		570	0	6										
17:45	295	18	0	0	0	180			0		505	0	12										

A.M. Peak Hour
7:00 - 8:00

P.M. Peak Hour
16:15 - 17:15

A.M. Peak Hour	Eastbound Woodmen Road					Westbound S Chambers Rd					Northbound S Parker Rd					Southbound S Parker Rd					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
	7:00	0	201	12	0	0	351	0	0	0	0	2	0	0	0	0	0	0	0	0	566
7:15	0	200	8	0	0	0	352	0	0	0	0	2	0	0	0	0	0	0	0	0	562
7:30	0	182	12	0	0	0	311	0	0	0	0	7	0	0	0	0	0	0	0	0	512
7:45	0	211	20	0	0	0	244	0	0	0	0	1	0	0	0	0	0	0	0	0	476
TOTAL	0	794	52	0	0	0	1258	0	0	0	0	12	0	0	0	0	0	0	0	0	2116
Ped Conflicts	0		0			0		0			0		0			0		0			0

P.M. Peak Hour	Eastbound Woodmen Road					Westbound S Chambers Rd					Northbound S Parker Rd					Southbound S Parker Rd					Vehicle Total	
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
	16:15	0	285	29	0	0	217	0	0	0	0	13	0	0	0	0	0	0	0	0	0	544
16:30	0	291	18	0	0	0	267	0	0	0	0	12	0	0	0	0	0	0	0	0	0	588
16:45	0	329	19	0	0	0	222	0	0	0	0	5	0	0	0	0	0	0	0	0	0	575
17:00	0	301	13	0	0	0	261	0	0	0	0	16	0	0	0	0	0	0	0	0	0	591
TOTAL	0	1206	79	0	0	0	967	0	0	0	0	46	0	0	0	0	0	0	0	0	2298	
Ped Conflicts	0		0			0		0			0		0			0		0			0	

Count Location: 2. Meridian Road at Woodmen Road
Count Date: Tuesday, January 10, 2023
ather Conditions:
urface Condition:
names of Counters: Ridgeview Data Collection

A.M. PEAK PERIOD																					
Time	Eastbound Woodmen Road					Westbound Woodmen Road					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
7:00	95	67	51			10	115	8			36	32	6			5	224	210			859
7:15	81	61	63			14	125	17			39	50	10			7	214	222			903
7:30	72	64	51			16	107	22			39	59	2			14	200	178			824
7:45	79	73	62			22	95	17			35	69	3			17	162	124			758
8:00	92	70	39			23	69	19			32	71	6			14	140	121			696
8:15	70	46	30			15	115	17			52	78	9			14	140	107			693
8:30	91	78	34			15	80	9			33	53	4			13	133	111			654
8:45	80	57	23			11	46	18			22	68	5			13	92	79			514

Time	P.M. PEAK PERIOD															Vehicle Total					
	Eastbound Woodmen Road					Westbound Woodmen Road					Northbound Meridian Road					Southbound Meridian Road					
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
16:00	156	134	37			30	88	30		0	53	165	28		0	21	138	117		997	
16:15	174	152	38			35	89	32		0	52	123	20		0	27	101	91		934	
16:30	132	116	36			33	99	38		0	64	168	20		0	19	99	113		937	
16:45	209	137	40			30	87	39		0	56	160	25		0	22	95	83		983	
17:00	146	119	22			23	92	28		0	71	184	21		0	20	105	110		941	
17:15	189	127	29			34	90	37		0	49	166	31		0	32	94	97		975	
17:30	161	122	49			25	78	31		0	42	149	17		1	32	111	84		901	
17:45	167	96	30			33	63	32		1	43	155	23		0	29	84	85		840	

A.M. Peak Hour
7:00 - 8:00

P.M. Peak Hour
16:15 - 17:15

A.M. Peak Hour	Eastbound Woodmen Road					Westbound Woodmen Road					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
7:00	95	67	51	0	0	10	115	8	0	0	36	32	6	0	0	5	224	210	0	0	859
7:15	81	61	63	0	0	14	125	17	0	0	39	50	10	0	0	7	214	222	0	0	903
7:30	72	64	51	0	0	16	107	22	0	0	39	59	2	0	0	14	200	178	0	0	824
7:45	79	73	62	0	0	22	95	17	0	0	35	69	3	0	0	17	162	124	0	0	758
TOTAL	327	265	227	0	0	62	442	64	0	0	149	210	21	0	0	43	800	734	0	0	3344
Ped Conflicts	0		0			0		0			0		0			0		0			0

P.M. Peak Hour	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	Woodmen Road					Woodmen Road					Meridian Road					Meridian Road						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:15	174	152	38	0	0	35	89	32	0	0	52	123	20	0	0	27	101	91	0	0	934	
16:30	132	116	36	0	0	33	99	38	0	0	64	168	20	0	0	19	99	113	0	0	937	
16:45	209	137	40	0	0	30	87	39	0	0	56	160	25	0	0	22	95	83	0	0	983	
17:00	146	119	22	0	0	23	92	28	0	0	71	184	21	0	0	20	105	110	0	0	941	
TOTAL	661	524	136	0	0	121	367	137	0	0	243	635	86	0	0	88	400	397	0	0	3795	
Ped Conflicts	0	0	0			0	0	0			0	0	0			0	0	0			0	

Count Location:	3. Meridian RD at WM Drive
Count Date:	Tuesday, January 10, 2023
ather Conditions:	
urface Condition:	
names of Counters:	Ridgeview Data Collection

A.M. PEAK PERIOD																					
Time	Eastbound Flower Road					Westbound Flower Road					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
7:00	0	0	7			0	0	1			11	65	1			21	266	0			372
7:15	0	0	5			0	0	4			9	84	3			22	248	0			375
7:30	0	0	5			0	0	8			10	76	5			29	238	2			373
7:45	0	0	8			1	0	6			14	64	5			46	187	2			333
8:00	0	0	7			1	0	10			8	89	4			35	158	5			317
8:15	0	0	5			0	0	9			13	91	0			49	133	4			304
8:30	0	0	9			0	0	8			22	60	3			37	128	2			269
8:45	0	0	11			0	0	8			19	65	4			42	88	4			241

P.M. PEAK PERIOD																							
Time	Eastbound Flower Road					Westbound Flower Road					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total		
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds			
16:00	0	0	22			0	0	7			38	152	8		0	99	122	5		1	453		
16:15	0	0	17			0	0	7			27	151	4		0	99	96	6		0	407		
16:30	0	0	30			0	0	12			27	149	5		1	89	100	10		0	422		
16:45	0	0	21			0	0	6			26	177	2		0	97	97	6		1	432		
17:00	0	0	31			0	0	9			34	189	1		0	100	84	6		1	454		
17:15	0	0	25			0	0	8			42	154	6		0	116	90	5		0	446		
17:30	0	0	17			0	0	10			19	153	3		0	90	100	5		0	397		
17:45	0	0	16			0	0	9			31	134	4		0	106	77	8		1	385		

A.M. Peak Hour
7:00 - 8:00

P.M. Peak Hour
16:15 - 17:15

A.M. Peak Hour	Eastbound Flower Road					Westbound Flower Road					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
7:00	0	0	7	0	0	0	0	1	0	0	11	65	1	0	0	21	266	0	0	0	372
7:15	0	0	5	0	0	0	0	4	0	0	9	84	3	0	0	22	248	0	0	0	375
7:30	0	0	5	0	0	0	0	8	0	0	10	76	5	0	0	29	238	2	0	0	373
7:45	0	0	8	0	0	1	0	6	0	0	14	64	5	0	0	46	187	2	0	0	333
TOTAL	0	0	25	0	0	1	0	19	0	0	44	289	14	0	0	118	939	4	0	0	1453
Ped Conflicts	0		0			0		0			0		0			0		0			0

P.M. Peak Hour	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	Flower Road					Flower Road					Meridian Road					Meridian Road						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:15	0	0	17	0	0	0	0	7	0	0	27	151	4	0	0	99	96	6	0	0	407	
16:30	0	0	30	0	0	0	0	12	0	0	27	149	5	0	1	89	100	10	0	0	422	
16:45	0	0	21	0	0	0	0	6	0	0	26	177	2	0	0	97	97	6	0	1	432	
17:00	0	0	31	0	0	0	0	9	0	0	34	189	1	0	0	100	84	6	0	1	454	
TOTAL	0	0	99	0	0	0	0	34	0	0	114	666	12	0	1	385	377	28	0	2	1715	
Ped Conflicts	2		1			1		2			1		1			2		2			6	

Count Location:	4. Foxtail Meadow at Meridian Market
Count Date:	Tuesday, January 10, 2023
ather Conditions:	
urface Condition:	
names of Counters:	Ridgeview Data Collection

A.M. PEAK PERIOD																					
Time	Eastbound					Westbound					Northbound					Southbound					Vehicle Total
	Meridian Market View		Foxtail Meadow Lane			Foxtail Meadow Lane					Foxtail Meadow Lane					Foxtail Meadow Lane					
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
7:00						0		2			0		1			1	9				13
7:15						3		1			1		1			1	8				15
7:30						2		2			3		0			1	10				18
7:45						2		1			1		1			4	13				22
8:00						0		1			0		2			3	15				21
8:15						3		2			0		2			5	15				27
8:30						4		2			1		2			6	8				23
8:45						7		2			2		1			1	8				21

P.M. PEAK PERIOD																					
Time	Eastbound					Westbound					Northbound					Southbound					Vehicle Total
	0		Meridian Market View			Foxtail Meadow Lane		Lane			Foxtail Meadow Lane		Lane		Foxtail Meadow Lane		Lane				
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
16:00						14		4			4	13				20	11				66
16:15						15		9			2	12				14	7				59
16:30						13		8			2	5				9	7				44
16:45						12		4			0	12				6	7				41
17:00						14		15			1	9				6	4				49
17:15						12		6			1	13				1	10				43
17:30						7		6			1	9				8	8				39
17:45						8		8			1	10				8	5				40

A.M. Peak Hour

P.M. Peak Hour
16:15 - 17:15

A.M. Peak Hour	Eastbound					Westbound					Northbound					Southbound					Vehicle Total
	0		Meridian Market View			0		Foxtail Meadow Lane			0		Foxtail Meadow Lane			Foxtail Meadow Lane					
Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
7:00	0	0	0	0	0	0	0	2	0	0	0	0	1	0	0	1	9	0	0	0	13
7:15	0	0	0	0	0	3	0	1	0	0	0	1	1	0	0	1	8	0	0	0	15
7:30	0	0	0	0	0	2	0	2	0	0	0	3	0	0	0	1	10	0	0	0	18
7:45	0	0	0	0	0	2	0	1	0	0	0	1	1	0	0	4	13	0	0	0	22
TOTAL	0	0	0	0	0	7	0	6	0	0	0	5	3	0	0	7	40	0	0	0	68
Ped Conflicts	0	0				0	0			0		0			0	0	0				0

P.M. Peak Hour	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	0					Meridian Market View					Foxtail Meadow Lane					Foxtail Meadow Lane						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:15	0	0	0	0	0	15	0	9	0	0	0	2	12	0	0	14	7	0	0	0	59	
16:30	0	0	0	0	0	13	0	8	0	0	0	2	5	0	0	9	7	0	0	0	44	
16:45	0	0	0	0	0	12	0	4	0	0	0	0	12	0	0	6	7	0	0	0	41	
17:00	0	0	0	0	0	14	0	15	0	0	0	1	9	0	0	6	4	0	0	0	49	
TOTAL	0	0	0	0	0	54	0	36	0	0	0	5	38	0	0	35	25	0	0	0	193	
Ped Conflicts	0	0				0	0				0		0			0		0			0	

Count Location: 5. Foxtail Meadow at Rolling Thunder

Count Date: Tuesday, January 10, 2023

Weather Conditions:

Road Surface Condition:

Names of Counters: Ridgeview Data Collection

Time	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	Rolling Thunder Way					Rolling Thunder Way					Foxtail Meadow Lane											
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
7:00	0	36				10	1				9		0			56						
7:15	2	38				16	0				9		2			67						
7:30	3	36				23	1				9		3			75						
7:45	2	23				24	0				16		0			65						
8:00	0	34				15	2				15		0			66						
8:15	2	34				17	0				14		3			70						
8:30	2	29				24	1				10		3			69						
8:45	2	19				11	1				7		8			48						

Time	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	Rolling Thunder Way					Rolling Thunder Way					0					Foxtail Meadow Lane						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:00	10	25				0	43	7	0		14		7		0	106						
16:15	6	23				0	32	2	2		5		8		1	76						
16:30	5	15				0	32	13	0		12		15		0	92						
16:45	2	28				1	35	5	0		8		8		0	86						
17:00	6	25				0	29	8	0		11		4		0	83						
17:15	9	33				0	30	14	0		19		5		1	110						
17:30	6	23				0	32	6	0		11		4		0	82						
17:45	6	16				0	25	7	0		14		11		0	79						

A.M. Peak Hour
7:30 - 8:30

P.M. Peak Hour
16:15 - 17:15

A.M. Peak Hour	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	Rolling Thunder Way					Rolling Thunder Way					0					Foxtail Meadow Lane						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
7:30	3	36	0	0	0	0	23	1	0	0	0	0	0	0	0	9	0	3	0	0	75	
7:45	2	23	0	0	0	0	24	0	0	0	0	0	0	0	0	16	0	0	0	0	65	
8:00	0	34	0	0	0	0	15	2	0	0	0	0	0	0	0	15	0	0	0	0	66	
8:15	2	34	0	0	0	0	17	0	0	0	0	0	0	0	0	14	0	3	0	0	70	
TOTAL	7	127	0	0	0	0	79	3	0	0	0	0	0	0	0	54	0	6	0	0	276	
Ped Conflicts	0		0			0					0		0			0		0			0	

P.M. Peak Hour	Eastbound					Westbound					Northbound					Southbound					Vehicle Total	
	Rolling Thunder Way					Rolling Thunder Way					0					Foxtail Meadow Lane						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:15	6	23	0	0	0	0	32	2	0	2	0	0	0	0	0	5	0	8	0	1	76	
16:30	5	15	0	0	0	0	32	13	0	0	0	0	0	0	0	12	0	15	0	0	92	
16:45	2	28	0	0	1	0	35	5	0	0	0	0	0	0	0	8	0	8	0	0	86	
17:00	6	25	0	0	0	0	29	8	0	0	0	0	0	0	0	11	0	4	0	0	83	
TOTAL	19	91	0	0	1	0	128	28	0	2	0	0	0	0	0	36	0	35	0	1	337	
Ped Conflicts	2		1		2		3			1		2			3		2				8	

Count Location: 6. Rolling Thunder at Meridian Rd
 Count Date: Tuesday, January 10, 2023
 Weather Conditions:
 Road Surface Condition:
 Names of Counters: Ridgeview Data Collection

Time	A.M. PEAK PERIOD										Vehicle Total												
	Eastbound Rolling Thunder Way					Westbound Rolling Thunder Way						Northbound Meridian Road					Southbound Meridian Road						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
7:00	10	4	28	1		8	5	2			5	64	6			1	258	1				392	
7:15	9	3	36	1		14	1	3			13	87	4			3	247	2				422	
7:30	10	4	33	1		21	5	1			15	90	10			2	211	5				407	
7:45	2	3	34	1		9	9	7			12	80	8			5	215	5				389	
8:00	6	6	35	1		6	3	2			9	89	5			4	134	4				303	
8:15	4	1	45	1		4	3	5			12	95	8			3	150	2				332	
8:30	2	3	35	1		2	6	5			16	78	11			8	124	3				293	
8:45	5	3	17	1		2	3	8			5	73	10			7	93	4				230	

Time	P.M. PEAK PERIOD										Vehicle Total												
	Eastbound Rolling Thunder Way					Westbound Rolling Thunder Way						Northbound Meridian Road					Southbound Meridian Road						
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds		
16:00	9	5	23	1		7	6	12			24	172	18			13	120	19				428	
16:15	14	3	14	1		9	7	11			16	155	13			9	85	12				348	
16:30	7	3	17	1		3	9	7			26	161	13			18	110	9				383	
16:45	13	6	15	1		3	10	7			23	188	18			9	93	7				392	
17:00	12	4	21	1		6	11	14			21	184	16			13	88	9				399	
17:15	11	15	23	1		3	13	12			19	172	11			13	89	8				389	
17:30	8	11	18	1		4	11	7			15	148	8			13	91	13				347	
17:45	7	3	20	1		4	5	9			18	152	7			6	74	8				313	

A.M. Peak Hour
7:00 - 8:00

P.M. Peak Hour
16:15 - 17:15

A.M. Peak Hour	Eastbound Rolling Thunder Way					Westbound Rolling Thunder Way					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
7:00	10	4	28	0	0	8	5	2	0	0	5	64	6	0	0	1	258	1	0	0	392
7:15	9	3	36	0	0	14	1	3	0	0	13	87	4	0	0	3	247	2	0	0	422
7:30	10	4	33	0	0	21	5	1	0	0	15	90	10	0	0	2	211	5	0	0	407
7:45	2	3	34	0	0	9	9	7	0	0	12	80	8	0	0	5	215	5	0	0	389
TOTAL	31	14	131	0	0	52	20	13	0	0	45	321	28	0	0	11	931	13	0	0	1610
Ped Conflicts	0		0			0		0			0		0			0		0			0

P.M. Peak Hour	Eastbound Rolling Thunder Way					Westbound Rolling Thunder Way					Northbound Meridian Road					Southbound Meridian Road					Vehicle Total
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	Left	Thru	Right	U	Peds	
16:15	14	3	14	0	0	9	7	11	0	0	16	155	13	0	0	9	85	12	0	0	348
16:30	7	3	17	0	0	3	9	7	0	0	26	161	13	0	0	18	110	9	0	0	383
16:45	13	6	15	0	0	3	10	7	0	0	23	188	18	0	0	9	93	7	0	0	392
17:00	12	4	21	0	0	6	11	14	0	0	21	184	16	0	0	13	88	9	0	0	399
TOTAL	46	16	67	0	0	21	37	39	0	0	86	688	60	0	0	49	376	37	0	0	1522
Ped Conflicts	0		0			0		0			0		0			0		0			0

Tab Two

Existing Conditions Capacity Analysis (2023)

WALMART FUEL STATIONS #4335 TIA

1: Foxtail Meadow Ln & E Woodmen Rd

Timing Plan: AM Peak Hour

Existing Conditions AM 2023



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑		↑↑		↑
Traffic Volume (vph)	794	52	0	1258	0	12
Future Volume (vph)	794	52	0	1258	0	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Grade (%)	15%			0%	0%	
Storage Length (ft)		545	0		0	0
Storage Lanes		1	0		0	1
Taper Length (ft)			25		25	
Lane Util. Factor	0.95	1.00	1.00	0.95	1.00	1.00
Fr _t		0.850			0.865	
Flt Protected						
Satd. Flow (prot)	3274	1465	0	3539	0	1611
Flt Permitted						
Satd. Flow (perm)	3274	1465	0	3539	0	1611
Link Speed (mph)	55			45	30	
Link Distance (ft)	878			970	879	
Travel Time (s)	10.9			14.7	20.0	
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93
Adj. Flow (vph)	854	56	0	1353	0	13
Shared Lane Traffic (%)						
Lane Group Flow (vph)	854	56	0	1353	0	13
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	62			62	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	16		16	9
Sign Control	Free			Free	Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 38.1%

ICU Level of Service A

Analysis Period (min) 15

WALMART FUEL STATIONS #4335 TIA

2: Meridian Rd & E Woodmen Rd

Timing Plan: AM Peak Hour

Existing Conditions AM 2023



Phase Number	1	2	3	4	5	6	7	8
Movement	WBL	EBT	NBL	SBT	EBL	WBT	SBL	NBT
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize	Yes							
Recall Mode	None	C-Max	None	None	None	C-Max	None	None
Maximum Split (s)	13	48	15	44	24	37	15	44
Maximum Split (%)	10.8%	40.0%	12.5%	36.7%	20.0%	30.8%	12.5%	36.7%
Minimum Split (s)	13	36	13	36	13	36	13	36
Yellow Time (s)	4	4	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2	2	2
Minimum Initial (s)	7	5	7	5	7	5	7	5
Vehicle Extension (s)	3	3	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0	0	0
Walk Time (s)		5		5		5		5
Flash Dont Walk (s)		25		25		25		25
Dual Entry	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Inhibit Max	Yes							
Start Time (s)	96	109	37	52	96	0	37	52
End Time (s)	109	37	52	96	0	37	52	96
Yield/Force Off (s)	103	31	46	90	114	31	46	90
Yield/Force Off 170(s)	103	6	46	65	114	6	46	65
Local Start Time (s)	96	109	37	52	96	0	37	52
Local Yield (s)	103	31	46	90	114	31	46	90
Local Yield 170(s)	103	6	46	65	114	6	46	65

Intersection Summary


Cycle Length 120

Control Type Actuated-Coordinated

Natural Cycle 100

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Splits and Phases: 2: Meridian Rd & E Woodmen Rd

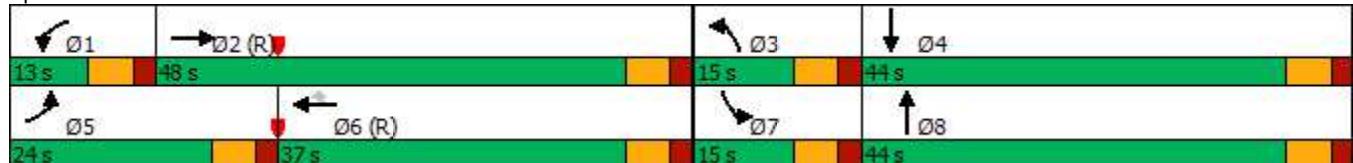

WALMART FUEL STATIONS #4335 TIA

2: Meridian Rd & E Woodmen Rd

Timing Plan: AM Peak Hour

Existing Conditions AM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (veh/h)	327	265	227	62	442	64	149	210	21	43	800	734
Future Volume (veh/h)	327	265	227	62	442	64	149	210	21	43	800	734
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No		No		No	No		No
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	352	285	0	67	475	0	160	226	0	46	860	0
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	415	1450		180	1208		216	1001		202	986	
Arrive On Green	0.12	0.41	0.00	0.05	0.34	0.00	0.06	0.28	0.00	0.06	0.28	0.00
Sat Flow, veh/h	3456	3554	1585	3456	3554	1585	3456	3554	1585	3456	3554	1585
Grp Volume(v), veh/h	352	285	0	67	475	0	160	226	0	46	860	0
Grp Sat Flow(s), veh/h/ln	1728	1777	1585	1728	1777	1585	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	12.0	6.2	0.0	2.2	12.2	0.0	5.5	5.9	0.0	1.5	27.7	0.0
Cycle Q Clear(g_c), s	12.0	6.2	0.0	2.2	12.2	0.0	5.5	5.9	0.0	1.5	27.7	0.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	415	1450		180	1208		216	1001		202	986	
V/C Ratio(X)	0.85	0.20		0.37	0.39		0.74	0.23		0.23	0.87	
Avail Cap(c_a), veh/h	518	1450		202	1208		259	1125		259	1125	
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	51.7	22.9	0.0	55.0	30.2	0.0	55.3	33.1	0.0	53.9	41.3	0.0
Incr Delay (d2), s/veh	10.5	0.3	0.0	1.3	1.0	0.0	8.9	0.1	0.0	0.6	7.0	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	5.7	2.6	0.0	1.0	5.2	0.0	2.6	2.5	0.0	0.7	12.9	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	62.2	23.2	0.0	56.3	31.1	0.0	64.2	33.2	0.0	54.5	48.3	0.0
LnGrp LOS	E	C		E	C		E	C		D	D	
Approach Vol, veh/h	637				542			386			906	
Approach Delay, s/veh	44.7				34.2			46.0			48.6	
Approach LOS	D				C			D			D	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	12.2	55.0	13.5	39.3	20.4	46.8	13.0	39.8				
Change Period (Y+Rc), s	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	42.0	9.0	38.0	18.0	31.0	9.0	38.0				
Max Q Clear Time (g_c+l1), s	4.2	8.2	7.5	29.7	14.0	14.2	3.5	7.9				
Green Ext Time (p_c), s	0.0	1.0	0.1	3.6	0.4	1.6	0.0	1.4				
Intersection Summary												
HCM 6th Ctrl Delay				44.1								
HCM 6th LOS				D								
Notes												
Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.												

WALMART FUEL STATIONS #4335 TIA
Timing Plan: AM Peak Hour

3: Meridian Rd & Flower Rd/Walmart Drive

Existing Conditions AM 2023

Intersection

Int Delay, s/veh 1.1

Movement	SBL	SBR	NWL	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations										
Traffic Vol, veh/h	0	25	0	0	44	289	14	118	939	4
Future Vol, veh/h	0	25	0	0	44	289	14	118	939	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	Free	-	-	-	-	None	-	-	None
Storage Length	-	0	-	0	215	-	215	245	-	0
Veh in Median Storage, #	1	-	0	-	-	0	-	-	0	-
Grade, %	0	-	0	-	-	0	-	-	0	-
Peak Hour Factor	97	97	97	97	97	97	97	97	97	97
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	26	0	0	45	298	14	122	968	4

Major/Minor	Minor1	Major1	Major2
Conflicting Flow All	-	149 972	0 0 312
Stage 1	-	- -	- -
Stage 2	-	- -	- -
Critical Hdwy	-	6.94 4.14	- 4.14
Critical Hdwy Stg 1	-	- -	- -
Critical Hdwy Stg 2	-	- -	- -
Follow-up Hdwy	-	3.32 2.22	- 2.22
Pot Cap-1 Maneuver	0 871 705	- - 1245	- -
Stage 1	0 - -	- -	- -
Stage 2	0 - -	- -	- -
Platoon blocked, %	-	- -	- -
Mov Cap-1 Maneuver	- 871 705	- - 1245	- -
Mov Cap-2 Maneuver	- - -	- - -	- -
Stage 1	- - -	- - -	- -
Stage 2	- - -	- - -	- -

Approach	NW	NE	SW
HCM Control Delay, s	9.2	1.3	0.9
HCM LOS	A		
<hr/>			
Minor Lane/Major Mvmt	NEL	NET	NERNWLln1 SWL SWT SWR
Capacity (veh/h)	705	- -	871 1245
HCM Lane V/C Ratio	0.064	- -	0.022 0.098
HCM Control Delay (s)	10.5	- -	9.2 8.2
HCM Lane LOS	B	- -	A A
HCM 95th %tile Q(veh)	0.2	- -	0.1 0.3

Intersection						
Int Delay, s/veh	2.4					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	7	6	5	3	7	40
Future Vol, veh/h	7	6	5	3	7	40
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	-	325	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	77	77	77	77	77	77
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	9	8	6	4	9	52
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	78	8	0	0	10	0
Stage 1	8	-	-	-	-	-
Stage 2	70	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	925	1074	-	-	1610	-
Stage 1	1015	-	-	-	-	-
Stage 2	953	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	919	1074	-	-	1610	-
Mov Cap-2 Maneuver	919	-	-	-	-	-
Stage 1	1015	-	-	-	-	-
Stage 2	947	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	8.7	0	1.1			
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	919	1074	1610	-
HCM Lane V/C Ratio	-	-	0.01	0.007	0.006	-
HCM Control Delay (s)	-	-	9	8.4	7.2	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0	0	0	-

WALMART FUEL STATIONS #4335 TIA
Timing Plan: AM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Exisiting Conditions AM 2023



Phase Number	2	4	6
Movement	EBTL	SBL	WBT
Lead/Lag			
Lead-Lag Optimize			
Recall Mode	C-Max	None	C-Max
Maximum Split (s)	25	35	25
Maximum Split (%)	41.7%	58.3%	41.7%
Minimum Split (s)	11	31.5	20
Yellow Time (s)	4	4	4
All-Red Time (s)	2	2	2
Minimum Initial (s)	5	5	5
Vehicle Extension (s)	3	3	3
Minimum Gap (s)	3	3	3
Time Before Reduce (s)	0	0	0
Time To Reduce (s)	0	0	0
Walk Time (s)			5
Flash Dont Walk (s)			9
Dual Entry	Yes	Yes	Yes
Inhibit Max	Yes	Yes	Yes
Start Time (s)	0	25	0
End Time (s)	25	0	25
Yield/Force Off (s)	19	54	19
Yield/Force Off 170(s)	19	54	10
Local Start Time (s)	0	25	0
Local Yield (s)	19	54	19
Local Yield 170(s)	19	54	10

Intersection Summary


Cycle Length 60

Control Type Actuated-Coordinated

Natural Cycle 55

Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green

Splits and Phases: 5: Rolling Thunder Way & Foxtail Meadow Ln

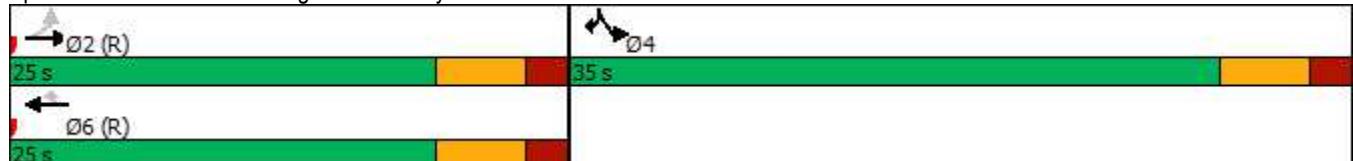

WALMART FUEL STATIONS #4335 TIA
Timing Plan: AM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Exisiting Conditions AM 2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	7	133	73	2	43	5
Future Volume (veh/h)	7	133	73	2	43	5
Initial Q (Q _b), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No	No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	8	145	79	2	47	5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2
Cap, veh/h	1096	1406	1406	1191	86	77
Arrive On Green	0.75	0.75	0.75	0.75	0.05	0.05
Sat Flow, veh/h	1317	1870	1870	1585	1781	1585
Grp Volume(v), veh/h	8	145	79	2	47	5
Grp Sat Flow(s), veh/h/ln	1317	1870	1870	1585	1781	1585
Q Serve(g_s), s	0.1	1.3	0.7	0.0	1.5	0.2
Cycle Q Clear(g_c), s	0.8	1.3	0.7	0.0	1.5	0.2
Prop In Lane	1.00			1.00	1.00	1.00
Lane Grp Cap(c), veh/h	1096	1406	1406	1191	86	77
V/C Ratio(X)	0.01	0.10	0.06	0.00	0.55	0.07
Avail Cap(c_a), veh/h	1096	1406	1406	1191	861	766
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.98	0.98	1.00	1.00
Uniform Delay (d), s/veh	2.0	2.0	1.9	1.9	27.9	27.3
Incr Delay (d2), s/veh	0.0	0.1	0.1	0.0	5.3	0.4
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	0.2	0.1	0.0	0.8	0.1
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	2.0	2.2	2.0	1.9	33.2	27.6
LnGrp LOS	A	A	A	A	C	C
Approach Vol, veh/h	153	81		52		
Approach Delay, s/veh	2.1	2.0		32.7		
Approach LOS	A	A		C		
Timer - Assigned Phs	2		4		6	
Phs Duration (G+Y+R _c), s	51.1		8.9		51.1	
Change Period (Y+R _c), s	6.0		6.0		6.0	
Max Green Setting (Gmax), s	19.0		29.0		19.0	
Max Q Clear Time (g_c+l1), s	3.3		3.5		2.7	
Green Ext Time (p_c), s	0.4		0.1		0.2	
Intersection Summary						
HCM 6th Ctrl Delay			7.7			
HCM 6th LOS			A			

WALMART FUEL STATIONS #4335 TIA

Timing Plan: AM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Exisiting Conditions AM 2023



Phase Number	1	2	4	5	6	8
Movement	WBL	EBT	SBTL	EBL	WBT	NBTL
Lead/Lag	Lag	Lead		Lead	Lag	
Lead-Lag Optimize	Yes	Yes		Yes	Yes	
Recall Mode	None	Max	C-Max	None	Max	C-Max
Maximum Split (s)	11	32	32	11	32	32
Maximum Split (%)	14.7%	42.7%	42.7%	14.7%	42.7%	42.7%
Minimum Split (s)	11	32	32	11	32	32
Yellow Time (s)	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2
Minimum Initial (s)	5	5	5	5	5	5
Vehicle Extension (s)	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0
Walk Time (s)		5	5		5	5
Flash Dont Walk (s)		21	21		21	21
Dual Entry	Yes	Yes	Yes	No	Yes	Yes
Inhibit Max	Yes	Yes	Yes	Yes	Yes	Yes
Start Time (s)	21	64	32	64	0	32
End Time (s)	32	21	64	0	32	64
Yield/Force Off (s)	26	15	58	69	26	58
Yield/Force Off 170(s)	26	69	37	69	5	37
Local Start Time (s)	64	32	0	32	43	0
Local Yield (s)	69	58	26	37	69	26
Local Yield 170(s)	69	37	5	37	48	5

Intersection Summary


Cycle Length 75

Control Type Actuated-Coordinated

Natural Cycle 75

Offset: 32 (43%), Referenced to phase 4:SBTL and 8:NBTL, Start of Green

Splits and Phases: 6: Meridian Rd & Rolling Thunder Way

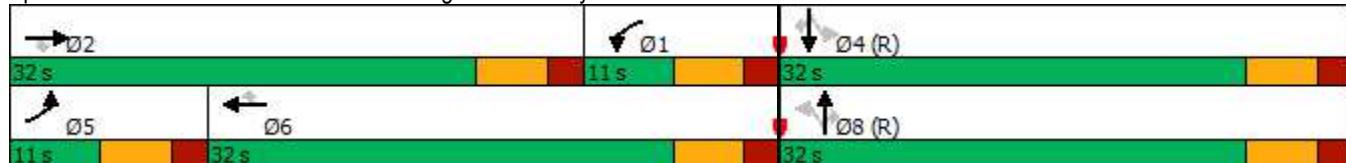

WALMART FUEL STATIONS #4335 TIA
Timing Plan: AM Peak Hour

6: Meridian Rd & Rolling Thunder Way
Existing Conditions AM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (veh/h)	31	14	131	52	20	13	45	321	28	11	931	13
Future Volume (veh/h)	31	14	131	52	20	13	45	321	28	11	931	13
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No			No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	33	15	138	55	21	14	47	338	29	12	980	14
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	115	648	549	110	1333	594	155	1250	558	384	1250	558
Arrive On Green	0.03	0.35	0.35	0.06	0.38	0.38	0.35	0.35	0.35	0.35	0.35	0.35
Sat Flow, veh/h	3456	1870	1585	1781	3554	1585	567	3554	1585	1015	3554	1585
Grp Volume(v), veh/h	33	15	138	55	21	14	47	338	29	12	980	14
Grp Sat Flow(s), veh/h/ln	1728	1870	1585	1781	1777	1585	567	1777	1585	1015	1777	1585
Q Serve(g_s), s	0.7	0.4	4.7	2.2	0.3	0.4	6.1	5.1	0.9	0.6	18.5	0.4
Cycle Q Clear(g_c), s	0.7	0.4	4.7	2.2	0.3	0.4	24.6	5.1	0.9	5.8	18.5	0.4
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	115	648	549	110	1333	594	155	1250	558	384	1250	558
V/C Ratio(X)	0.29	0.02	0.25	0.50	0.02	0.02	0.30	0.27	0.05	0.03	0.78	0.03
Avail Cap(c_a), veh/h	230	648	549	119	1333	594	155	1250	558	384	1250	558
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	35.4	16.1	17.5	34.1	14.7	14.8	32.8	17.4	16.0	19.5	21.8	15.9
Incr Delay (d2), s/veh	1.4	0.1	1.1	3.5	0.0	0.1	4.9	0.5	0.2	0.2	5.0	0.1
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.3	0.2	1.8	1.0	0.1	0.2	1.0	2.0	0.3	0.2	7.9	0.2
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	36.8	16.2	18.6	37.6	14.8	14.8	37.7	17.9	16.2	19.6	26.7	16.0
LnGrp LOS	D	B	B	D	B	B	D	B	B	B	C	B
Approach Vol, veh/h	186				90			414			1006	
Approach Delay, s/veh	21.6				28.7			20.1			26.5	
Approach LOS	C				C			C			C	
Timer - Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+R _c), s	10.6	32.0		32.4	8.5	34.1		32.4				
Change Period (Y+R _c), s	6.0	6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s	5.0	26.0		26.0	5.0	26.0		26.0				
Max Q Clear Time (g_c+l1), s	4.2	6.7		20.5	2.7	2.4		26.6				
Green Ext Time (p_c), s	0.0	0.4		2.2	0.0	0.1		0.0				
Intersection Summary												
HCM 6th Ctrl Delay			24.5									
HCM 6th LOS			C									

WALMART FUEL STATIONS #4335 TIA

7: Meridian Rd & Meridian Market View

Timing Plan: AM Peak Hour

Existing Conditions AM 2023

Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	0	72	0	308	0	0	1061	28
Future Volume (vph)	0	0	0	0	0	72	0	308	0	0	1061	28
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	0		130	0		0
Storage Lanes	0		1	0		1	0		1	0		1
Taper Length (ft)	75			75			75			75		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt						0.865						0.850
Flt Protected												
Satd. Flow (prot)	0	0	1863	0	0	1611	0	3539	1863	0	3539	1583
Flt Permitted												
Satd. Flow (perm)	0	0	1863	0	0	1611	0	3539	1863	0	3539	1583
Link Speed (mph)		30			30			35			35	
Link Distance (ft)		228			234			551			701	
Travel Time (s)		5.2			5.3			10.7			13.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	0	0	78	0	335	0	0	1153	30
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	0	78	0	335	0	0	1153	30
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			24			24	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		48			48			48			48	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	62		62	62		62	62		62	62		62
Sign Control		Free			Free			Free			Free	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	32.7%							ICU Level of Service A				
Analysis Period (min)	15											

WALMART FUEL STATIONS #4335 TIA

1: Foxtail Meadow Ln & E Woodmen Rd

Timing Plan: PM Peak Hour

Exisiting Conditions PM 2023



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑		↑↑		↑
Traffic Volume (vph)	1206	79	0	967	0	46
Future Volume (vph)	1206	79	0	967	0	46
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Grade (%)	15%			0%	0%	
Storage Length (ft)		545	0		0	0
Storage Lanes		1	0		0	1
Taper Length (ft)			25		25	
Lane Util. Factor	0.95	1.00	1.00	0.95	1.00	1.00
Fr _t		0.850			0.865	
Flt Protected						
Satd. Flow (prot)	3274	1465	0	3539	0	1611
Flt Permitted						
Satd. Flow (perm)	3274	1465	0	3539	0	1611
Link Speed (mph)	55			45	30	
Link Distance (ft)	878			970	879	
Travel Time (s)	10.9			14.7	20.0	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	1243	81	0	997	0	47
Shared Lane Traffic (%)						
Lane Group Flow (vph)	1243	81	0	997	0	47
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	62			62	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	16		16	9
Sign Control	Free			Free	Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization 43.3%			ICU Level of Service A			
Analysis Period (min) 15						

WALMART FUEL STATIONS #4335 TIA

2: Meridian Rd & E Woodmen Rd

Timing Plan: PM Peak Hour

Exisiting Conditions PM 2023



Phase Number	1	2	3	4	5	6	7	8
Movement	WBL	EBT	NBL	SBT	EBL	WBT	SBL	NBT
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize	Yes							
Recall Mode	None	C-Max	None	None	None	C-Max	None	None
Maximum Split (s)	14	54	16	36	31	37	13	39
Maximum Split (%)	11.7%	45.0%	13.3%	30.0%	25.8%	30.8%	10.8%	32.5%
Minimum Split (s)	13	36	13	36	13	36	13	36
Yellow Time (s)	4	4	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2	2	2
Minimum Initial (s)	7	5	7	5	7	5	7	5
Vehicle Extension (s)	3	3	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0	0	0
Walk Time (s)		5		5		5		5
Flash Dont Walk (s)		25		25		25		25
Dual Entry	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Inhibit Max	Yes							
Start Time (s)	89	103	37	53	89	0	37	50
End Time (s)	103	37	53	89	0	37	50	89
Yield/Force Off (s)	97	31	47	83	114	31	44	83
Yield/Force Off 170(s)	97	6	47	58	114	6	44	58
Local Start Time (s)	89	103	37	53	89	0	37	50
Local Yield (s)	97	31	47	83	114	31	44	83
Local Yield 170(s)	97	6	47	58	114	6	44	58

Intersection Summary


Cycle Length 120

Control Type Actuated-Coordinated

Natural Cycle 110

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Splits and Phases: 2: Meridian Rd & E Woodmen Rd

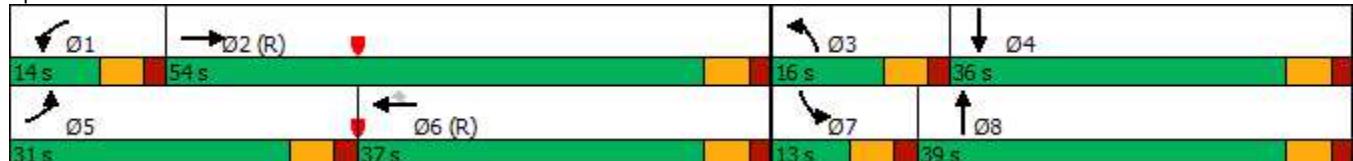

WALMART FUEL STATIONS #4335 TIA

Timing Plan: PM Peak Hour

2: Meridian Rd & E Woodmen Rd

Existing Conditions PM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (veh/h)	661	524	136	121	367	137	243	635	86	88	400	397
Future Volume (veh/h)	661	524	136	121	367	137	243	635	86	88	400	397
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No			No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	681	540	0	125	378	0	251	655	0	91	412	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	720	1655		198	1119		288	776		202	688	
Arrive On Green	0.21	0.47	0.00	0.06	0.31	0.00	0.08	0.22	0.00	0.06	0.19	0.00
Sat Flow, veh/h	3456	3554	1585	3456	3554	1585	3456	3554	1585	3456	3554	1585
Grp Volume(v), veh/h	681	540	0	125	378	0	251	655	0	91	412	0
Grp Sat Flow(s), veh/h/ln	1728	1777	1585	1728	1777	1585	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	23.3	11.5	0.0	4.2	9.8	0.0	8.6	21.2	0.0	3.1	12.7	0.0
Cycle Q Clear(g_c), s	23.3	11.5	0.0	4.2	9.8	0.0	8.6	21.2	0.0	3.1	12.7	0.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	720	1655		198	1119		288	776		202	688	
V/C Ratio(X)	0.95	0.33		0.63	0.34		0.87	0.84		0.45	0.60	
Avail Cap(c_a), veh/h	720	1655		230	1119		288	977		202	888	
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	46.8	20.2	0.0	55.3	31.5	0.0	54.4	44.9	0.0	54.6	44.1	0.0
Incr Delay (d2), s/veh	21.3	0.5	0.0	4.3	0.8	0.0	24.0	5.6	0.0	1.6	0.8	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	11.8	4.7	0.0	1.9	4.2	0.0	4.7	9.8	0.0	1.4	5.6	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	68.2	20.7	0.0	59.6	32.3	0.0	78.3	50.5	0.0	56.2	45.0	0.0
LnGrp LOS	E	C		E	C		E	D		E	D	
Approach Vol, veh/h	1221				503			906			503	
Approach Delay, s/veh	47.2				39.1			58.2			47.0	
Approach LOS		D			D			E			D	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	12.9	61.9	16.0	29.2	31.0	43.8	13.0	32.2				
Change Period (Y+Rc), s	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	8.0	48.0	10.0	30.0	25.0	31.0	7.0	33.0				
Max Q Clear Time (g_c+l1), s	6.2	13.5	10.6	14.7	25.3	11.8	5.1	23.2				
Green Ext Time (p_c), s	0.0	2.1	0.0	2.3	0.0	1.3	0.0	3.0				
Intersection Summary												
HCM 6th Ctrl Delay				49.1								
HCM 6th LOS				D								
Notes												
Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.												

WALMART FUEL STATIONS #4335 TIA
Timing Plan: PM Peak Hour

3: Meridian Rd & Flower Rd/Walmart Drive

Existing Conditions PM 2023

Intersection

Int Delay, s/veh 3.9

Movement	SBL	SBR	NWL	NWR	NEL	NET	NER	SWL	SWT	SWR
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Lane Configurations

Traffic Vol, veh/h	0	99	0	0	114	666	12	385	377	28
--------------------	---	----	---	---	-----	-----	----	-----	-----	----

Future Vol, veh/h	0	99	0	0	114	666	12	385	377	28
-------------------	---	----	---	---	-----	-----	----	-----	-----	----

Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0
------------------------	---	---	---	---	---	---	---	---	---	---

Sign Control	Free	Free	Stop	Stop	Free	Free	Free	Free	Free	Free
--------------	------	------	------	------	------	------	------	------	------	------

RT Channelized	-	Free	-	-	-	-	None	-	-	None
----------------	---	------	---	---	---	---	------	---	---	------

Storage Length	-	0	-	0	215	-	215	245	-	0
----------------	---	---	---	---	-----	---	-----	-----	---	---

Veh in Median Storage, #	1	-	0	-	-	0	-	-	0	-
--------------------------	---	---	---	---	---	---	---	---	---	---

Grade, %	0	-	0	-	-	0	-	-	0	-
----------	---	---	---	---	---	---	---	---	---	---

Peak Hour Factor	94	94	94	94	94	94	94	94	97	94
------------------	----	----	----	----	----	----	----	----	----	----

Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2
-------------------	---	---	---	---	---	---	---	---	---	---

Mvmt Flow	0	105	0	0	121	709	13	410	389	30
-----------	---	-----	---	---	-----	-----	----	-----	-----	----

Major/Minor	Minor1	Major1	Major2		
-------------	--------	--------	--------	--	--

Conflicting Flow All	-	355	419	0	0	722	0	0
----------------------	---	-----	-----	---	---	-----	---	---

Stage 1	-	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---

Stage 2	-	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---

Critical Hdwy	-	6.94	4.14	-	-	4.14	-	-
---------------	---	------	------	---	---	------	---	---

Critical Hdwy Stg 1	-	-	-	-	-	-	-	-
---------------------	---	---	---	---	---	---	---	---

Critical Hdwy Stg 2	-	-	-	-	-	-	-	-
---------------------	---	---	---	---	---	---	---	---

Follow-up Hdwy	-	3.32	2.22	-	-	2.22	-	-
----------------	---	------	------	---	---	------	---	---

Pot Cap-1 Maneuver	0	641	1137	-	-	876	-	-
--------------------	---	-----	------	---	---	-----	---	---

Stage 1	0	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---

Stage 2	0	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---

Platoon blocked, %	-	-	-	-	-	-	-	-
--------------------	---	---	---	---	---	---	---	---

Mov Cap-1 Maneuver	-	641	1137	-	-	876	-	-
--------------------	---	-----	------	---	---	-----	---	---

Mov Cap-2 Maneuver	-	-	-	-	-	-	-	-
--------------------	---	---	---	---	---	---	---	---

Stage 1	-	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---

Stage 2	-	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---

Approach	NW	NE	SW		
----------	----	----	----	--	--

HCM Control Delay, s	11	1.2	6.3		
----------------------	----	-----	-----	--	--

HCM LOS	B				
---------	---	--	--	--	--

Minor Lane/Major Mvmt	NEL	NET	NER	NWL	Ln1	SWL	SWT	SWR
-----------------------	-----	-----	-----	-----	-----	-----	-----	-----

Capacity (veh/h)	1137	-	-	641	876	-	-	-
------------------	------	---	---	-----	-----	---	---	---

HCM Lane V/C Ratio	0.107	-	-	0.056	0.468	-	-	-
--------------------	-------	---	---	-------	-------	---	---	---

HCM Control Delay (s)	8.5	-	-	11	12.7	-	-	-
-----------------------	-----	---	---	----	------	---	---	---

HCM Lane LOS	A	-	-	B	B	-	-	-
--------------	---	---	---	---	---	---	---	---

HCM 95th %tile Q(veh)	0.4	-	-	0.2	2.5	-	-	-
-----------------------	-----	---	---	-----	-----	---	---	---

Intersection

Int Delay, s/veh 5.7

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	54	36	5	38	35	25
Future Vol, veh/h	54	36	5	38	35	25
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	-	325	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	82	82	82	82	82	82
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	66	44	6	46	43	30

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	145	29	0	0	52
Stage 1	29	-	-	-	-
Stage 2	116	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218
Pot Cap-1 Maneuver	847	1046	-	-	1554
Stage 1	994	-	-	-	-
Stage 2	909	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	823	1046	-	-	1554
Mov Cap-2 Maneuver	823	-	-	-	-
Stage 1	994	-	-	-	-
Stage 2	884	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	9.3	0	4.3
HCM LOS	A		

Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	823	1046	1554	-
HCM Lane V/C Ratio	-	-	0.08	0.042	0.027	-
HCM Control Delay (s)	-	-	9.8	8.6	7.4	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0.3	0.1	0.1	-


WALMART FUEL STATIONS #4335 TIA
Timing Plan: PM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Exisiting Conditions PM 2023



Phase Number	2	4	6
Movement	EBTL	SBL	WBT
Lead/Lag			
Lead-Lag Optimize			
Recall Mode	C-Max	None	C-Max
Maximum Split (s)	27	33	27
Maximum Split (%)	45.0%	55.0%	45.0%
Minimum Split (s)	11	31.5	20
Yellow Time (s)	4	4	4
All-Red Time (s)	2	2	2
Minimum Initial (s)	5	5	5
Vehicle Extension (s)	3	3	3
Minimum Gap (s)	3	3	3
Time Before Reduce (s)	0	0	0
Time To Reduce (s)	0	0	0
Walk Time (s)		5	
Flash Dont Walk (s)		9	
Dual Entry	Yes	Yes	Yes
Inhibit Max	Yes	Yes	Yes
Start Time (s)	0	27	0
End Time (s)	27	0	27
Yield/Force Off (s)	21	54	21
Yield/Force Off 170(s)	21	54	12
Local Start Time (s)	0	27	0
Local Yield (s)	21	54	21
Local Yield 170(s)	21	54	12
Intersection Summary			
Cycle Length	60		
Control Type	Actuated-Coordinated		
Natural Cycle	55		
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green			

Splits and Phases: 5: Rolling Thunder Way & Foxtail Meadow Ln

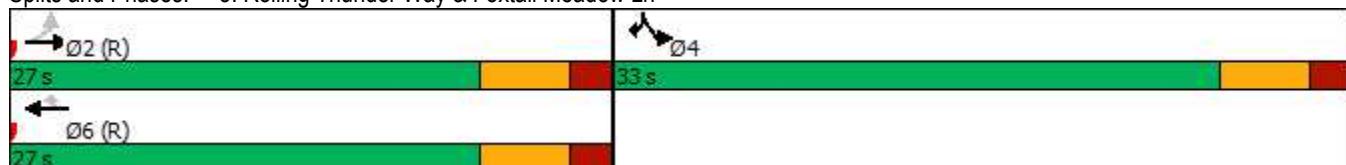

WALMART FUEL STATIONS #4335 TIA
Timing Plan: PM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Exisiting Conditions PM 2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	19	91	128	28	36	35
Future Volume (veh/h)	19	91	128	28	36	35
Initial Q (Q _b), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No	No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	21	99	139	30	39	38
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2
Cap, veh/h	994	1384	1384	1173	107	95
Arrive On Green	0.74	0.74	0.74	0.74	0.06	0.06
Sat Flow, veh/h	1216	1870	1870	1585	1781	1585
Grp Volume(v), veh/h	21	99	139	30	39	38
Grp Sat Flow(s), veh/h/ln	1216	1870	1870	1585	1781	1585
Q Serve(g_s), s	0.3	0.9	1.3	0.3	1.3	1.4
Cycle Q Clear(g_c), s	1.5	0.9	1.3	0.3	1.3	1.4
Prop In Lane	1.00			1.00	1.00	1.00
Lane Grp Cap(c), veh/h	994	1384	1384	1173	107	95
V/C Ratio(X)	0.02	0.07	0.10	0.03	0.36	0.40
Avail Cap(c_a), veh/h	994	1384	1384	1173	802	713
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.99	0.99	1.00	1.00
Uniform Delay (d), s/veh	2.4	2.1	2.2	2.1	27.1	27.1
Incr Delay (d2), s/veh	0.0	0.1	0.1	0.0	2.1	2.7
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	0.2	0.2	0.1	0.6	0.6
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	2.5	2.2	2.3	2.1	29.1	29.8
LnGrp LOS	A	A	A	A	C	C
Approach Vol, veh/h	120	169		77		
Approach Delay, s/veh	2.3	2.3		29.5		
Approach LOS	A	A		C		
Timer - Assigned Phs	2		4		6	
Phs Duration (G+Y+R _c), s	50.4		9.6		50.4	
Change Period (Y+R _c), s	6.0		6.0		6.0	
Max Green Setting (Gmax), s	21.0		27.0		21.0	
Max Q Clear Time (g_c+l1), s	3.5		3.4		3.3	
Green Ext Time (p_c), s	0.3		0.2		0.4	
Intersection Summary						
HCM 6th Ctrl Delay		8.0				
HCM 6th LOS		A				

WALMART FUEL STATIONS #4335 TIA

Timing Plan: PM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Exisiting Conditions PM 2023



Phase Number	1	2	4	5	6	8
Movement	WBL	EBT	SBTL	EBL	WBT	NBTL
Lead/Lag	Lag	Lead		Lead	Lag	
Lead-Lag Optimize	Yes	Yes		Yes	Yes	
Recall Mode	None	Max	C-Max	None	Max	C-Max
Maximum Split (s)	11	32	32	11	32	32
Maximum Split (%)	14.7%	42.7%	42.7%	14.7%	42.7%	42.7%
Minimum Split (s)	11	32	32	11	32	32
Yellow Time (s)	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2
Minimum Initial (s)	5	5	5	5	5	5
Vehicle Extension (s)	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0
Walk Time (s)		5	5		5	5
Flash Dont Walk (s)		21	21		21	21
Dual Entry	Yes	Yes	Yes	No	Yes	Yes
Inhibit Max	Yes	Yes	Yes	Yes	Yes	Yes
Start Time (s)	21	64	32	64	0	32
End Time (s)	32	21	64	0	32	64
Yield/Force Off (s)	26	15	58	69	26	58
Yield/Force Off 170(s)	26	69	37	69	5	37
Local Start Time (s)	64	32	0	32	43	0
Local Yield (s)	69	58	26	37	69	26
Local Yield 170(s)	69	37	5	37	48	5

Intersection Summary


Cycle Length 75

Control Type Actuated-Coordinated

Natural Cycle 75

Offset: 32 (43%), Referenced to phase 4:SBTL and 8:NBTL, Start of Green

Splits and Phases: 6: Meridian Rd & Rolling Thunder Way

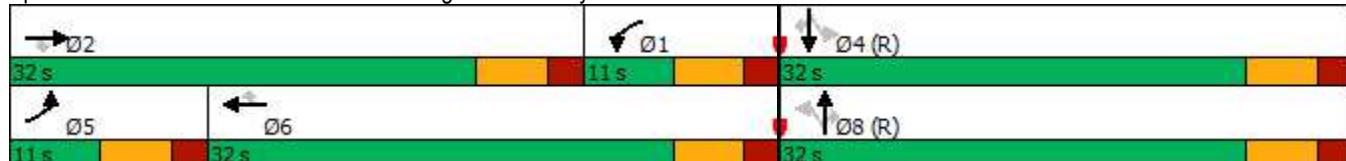

WALMART FUEL STATIONS #4335 TIA

Timing Plan: PM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Existing Conditions PM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (veh/h)	46	16	67	21	37	39	86	688	60	49	376	37
Future Volume (veh/h)	46	16	67	21	37	39	86	688	60	49	376	37
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	48	17	71	22	39	41	91	724	63	52	396	39
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	146	648	549	114	1309	584	352	1242	554	222	1242	554
Arrive On Green	0.04	0.35	0.35	0.06	0.37	0.37	0.35	0.35	0.35	0.35	0.35	0.35
Sat Flow, veh/h	3456	1870	1585	1781	3554	1585	954	3554	1585	688	3554	1585
Grp Volume(v), veh/h	48	17	71	22	39	41	91	724	63	52	396	39
Grp Sat Flow(s), veh/h/ln	1728	1870	1585	1781	1777	1585	954	1777	1585	688	1777	1585
Q Serve(g_s), s	1.0	0.4	2.3	0.9	0.5	1.3	5.8	12.5	2.0	5.0	6.1	1.2
Cycle Q Clear(g_c), s	1.0	0.4	2.3	0.9	0.5	1.3	11.9	12.5	2.0	17.5	6.1	1.2
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	146	648	549	114	1309	584	352	1242	554	222	1242	554
V/C Ratio(X)	0.33	0.03	0.13	0.19	0.03	0.07	0.26	0.58	0.11	0.23	0.32	0.07
Avail Cap(c_a), veh/h	230	648	549	119	1309	584	352	1242	554	222	1242	554
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	34.9	16.2	16.8	33.3	15.1	15.4	22.2	19.9	16.5	27.1	17.9	16.3
Incr Delay (d2), s/veh	1.3	0.1	0.5	0.8	0.0	0.2	1.8	2.0	0.4	2.5	0.7	0.2
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.4	0.2	0.9	0.4	0.2	0.5	1.4	5.1	0.7	0.9	2.4	0.5
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	36.2	16.2	17.2	34.1	15.2	15.6	24.0	21.9	16.9	29.5	18.5	16.5
LnGrp LOS	D	B	B	C	B	B	C	C	B	C	B	B
Approach Vol, veh/h	136				102			878			487	
Approach Delay, s/veh	23.8				19.4			21.8			19.5	
Approach LOS	C				B			C			B	
Timer - Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+R _c), s	10.8	32.0		32.2	9.2	33.6		32.2				
Change Period (Y+R _c), s	6.0	6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s	5.0	26.0		26.0	5.0	26.0		26.0				
Max Q Clear Time (g_c+l1), s	2.9	4.3		19.5	3.0	3.3		14.5				
Green Ext Time (p_c), s	0.0	0.2		1.2	0.0	0.2		2.9				
Intersection Summary												
HCM 6th Ctrl Delay				21.1								
HCM 6th LOS				C								

WALMART FUEL STATIONS #4335 TIA

7: Meridian Rd & Meridian Market View

Timing Plan: PM Peak Hour

Existing Conditions PM 2023

Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (vph)	0	0	186	0	0	324	0	640	60	0	604	53
Future Volume (vph)	0	0	186	0	0	324	0	640	60	0	604	53
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	0		130	0		0
Storage Lanes	0		1	0		1	0		1	0		1
Taper Length (ft)	75			75			75			75		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt			0.865			0.865			0.850			0.850
Flt Protected												
Satd. Flow (prot)	0	0	1611	0	0	1611	0	3539	1583	0	3539	1583
Flt Permitted												
Satd. Flow (perm)	0	0	1611	0	0	1611	0	3539	1583	0	3539	1583
Link Speed (mph)		30			30			35			35	
Link Distance (ft)		228			234			551			701	
Travel Time (s)		5.2			5.3			10.7			13.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	202	0	0	352	0	696	65	0	657	58
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	202	0	0	352	0	696	65	0	657	58
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			24			24	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		48			48			48			48	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	62		62	62		62	62		62	62		62
Sign Control		Free			Free			Free			Free	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	44.4%							ICU Level of Service A				
Analysis Period (min)	15											

Tab Three

Proposed Conditions Capacity Analysis (2023)

WALMART FUEL STATIONS #4335 TIA

1: Foxtail Meadow Ln & E Woodmen Rd

Timing Plan: AM Peak Hour

Proposed Conditions AM 2023




Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↗	↖	↑↑	↖	↗
Traffic Volume (vph)	799	53	0	1261	0	12
Future Volume (vph)	799	53	0	1261	0	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Grade (%)	15%			0%	0%	
Storage Length (ft)		545	0		0	0
Storage Lanes		1	0		0	1
Taper Length (ft)			25		25	
Lane Util. Factor	0.95	1.00	1.00	0.95	1.00	1.00
Fr _t		0.850			0.865	
Flt Protected						
Satd. Flow (prot)	3274	1465	0	3539	0	1611
Flt Permitted						
Satd. Flow (perm)	3274	1465	0	3539	0	1611
Link Speed (mph)	55			45	30	
Link Distance (ft)	878			999	879	
Travel Time (s)	10.9			15.1	20.0	
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93
Adj. Flow (vph)	859	57	0	1356	0	13
Shared Lane Traffic (%)						
Lane Group Flow (vph)	859	57	0	1356	0	13
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	62			62	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	16		16	9
Sign Control	Free			Free	Free	
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	38.2%			ICU Level of Service A		
Analysis Period (min)	15					

WALMART FUEL STATIONS #4335 TIA

2: Meridian Rd & E Woodmen Rd

Timing Plan: AM Peak Hour

Proposed Conditions AM 2023



Phase Number	1	2	3	4	5	6	7	8
Movement	WBL	EBT	NBL	SBT	EBL	WBT	SBL	NBT
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize	Yes							
Recall Mode	None	C-Max	None	None	None	C-Max	None	None
Maximum Split (s)	13	48	15	44	24	37	15	44
Maximum Split (%)	10.8%	40.0%	12.5%	36.7%	20.0%	30.8%	12.5%	36.7%
Minimum Split (s)	13	36	13	36	13	36	13	36
Yellow Time (s)	4	4	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2	2	2
Minimum Initial (s)	7	5	7	5	7	5	7	5
Vehicle Extension (s)	3	3	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0	0	0
Walk Time (s)		5		5		5		5
Flash Dont Walk (s)		25		25		25		25
Dual Entry	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Inhibit Max	Yes							
Start Time (s)	96	109	37	52	96	0	37	52
End Time (s)	109	37	52	96	0	37	52	96
Yield/Force Off (s)	103	31	46	90	114	31	46	90
Yield/Force Off 170(s)	103	6	46	65	114	6	46	65
Local Start Time (s)	96	109	37	52	96	0	37	52
Local Yield (s)	103	31	46	90	114	31	46	90
Local Yield 170(s)	103	6	46	65	114	6	46	65

Intersection Summary


Cycle Length 120

Control Type Actuated-Coordinated

Natural Cycle 100

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Splits and Phases: 2: Meridian Rd & E Woodmen Rd

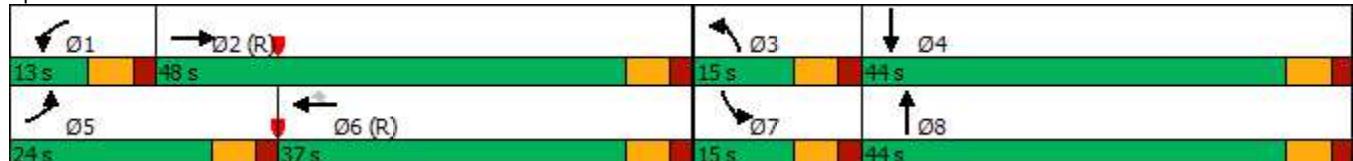

WALMART FUEL STATIONS #4335 TIA

2: Meridian Rd & E Woodmen Rd

Timing Plan: AM Peak Hour

Proposed Conditions AM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (veh/h)	327	265	232	63	442	64	152	216	21	43	816	734
Future Volume (veh/h)	327	265	232	63	442	64	152	216	21	43	816	734
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No			No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	352	285	0	68	475	0	163	232	0	46	877	0
Peak Hour Factor	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	415	1432		181	1192		219	1017		202	1000	
Arrive On Green	0.12	0.40	0.00	0.05	0.34	0.00	0.06	0.29	0.00	0.06	0.28	0.00
Sat Flow, veh/h	3456	3554	1585	3456	3554	1585	3456	3554	1585	3456	3554	1585
Grp Volume(v), veh/h	352	285	0	68	475	0	163	232	0	46	877	0
Grp Sat Flow(s), veh/h/ln	1728	1777	1585	1728	1777	1585	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	12.0	6.2	0.0	2.3	12.3	0.0	5.6	6.0	0.0	1.5	28.3	0.0
Cycle Q Clear(g_c), s	12.0	6.2	0.0	2.3	12.3	0.0	5.6	6.0	0.0	1.5	28.3	0.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	415	1432		181	1192		219	1017		202	1000	
V/C Ratio(X)	0.85	0.20		0.38	0.40		0.74	0.23		0.23	0.88	
Avail Cap(c_a), veh/h	518	1432		202	1192		259	1125		259	1125	
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	51.7	23.2	0.0	55.0	30.6	0.0	55.2	32.7	0.0	53.9	41.1	0.0
Incr Delay (d2), s/veh	10.5	0.3	0.0	1.3	1.0	0.0	9.3	0.1	0.0	0.6	7.4	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	5.7	2.6	0.0	1.0	5.3	0.0	2.7	2.6	0.0	0.7	13.2	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	62.2	23.6	0.0	56.3	31.6	0.0	64.5	32.8	0.0	54.5	48.6	0.0
LnGrp LOS	E	C		E	C		E	C		D	D	
Approach Vol, veh/h	637				543			395			923	
Approach Delay, s/veh	44.9				34.7			45.9			48.9	
Approach LOS	D				C			D			D	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	12.3	54.4	13.6	39.8	20.4	46.2	13.0	40.4				
Change Period (Y+Rc), s	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	7.0	42.0	9.0	38.0	18.0	31.0	9.0	38.0				
Max Q Clear Time (g_c+l1), s	4.3	8.2	7.6	30.3	14.0	14.3	3.5	8.0				
Green Ext Time (p_c), s	0.0	1.0	0.1	3.5	0.4	1.6	0.0	1.5				
Intersection Summary												
HCM 6th Ctrl Delay				44.3								
HCM 6th LOS				D								
Notes												
Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.												

WALMART FUEL STATIONS #4335 TIA
Timing Plan: AM Peak Hour

3: Meridian Rd & Flower Rd/Walmart Drive
Proposed Conditions AM 2023

Intersection

Int Delay, s/veh 1.2

Movement	SBL	SBR	NWL	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations										
Traffic Vol, veh/h	0	47	0	0	52	289	14	127	939	4
Future Vol, veh/h	0	47	0	0	52	289	14	127	939	4
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	Free	-	-	-	-	None	-	-	None
Storage Length	-	0	-	0	215	-	215	245	-	0
Veh in Median Storage, #	1	-	0	-	-	0	-	-	0	-
Grade, %	0	-	0	-	-	0	-	-	0	-
Peak Hour Factor	97	97	97	97	97	97	97	97	97	97
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	48	0	0	54	298	14	131	968	4

Major/Minor	Minor1	Major1	Major2			
Conflicting Flow All	-	149	972	0	0	312
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-
Critical Hdwy	-	6.94	4.14	-	-	4.14
Critical Hdwy Stg 1	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-
Follow-up Hdwy	-	3.32	2.22	-	-	2.22
Pot Cap-1 Maneuver	0	871	705	-	-	1245
Stage 1	0	-	-	-	-	-
Stage 2	0	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	871	705	-	-	1245
Mov Cap-2 Maneuver	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-


Approach	NW	NE	SW			
HCM Control Delay, s	9.2	1.5	1			
HCM LOS	A					
Minor Lane/Major Mvmt	NEL	NET	NERNWLn1	SWL	SWT	SWR
Capacity (veh/h)	705	-	-	871	1245	-
HCM Lane V/C Ratio	0.076	-	-	0.022	0.105	-
HCM Control Delay (s)	10.5	-	-	9.2	8.2	-
HCM Lane LOS	B	-	-	A	A	-
HCM 95th %tile Q(veh)	0.2	-	-	0.1	0.4	-

Intersection						
Int Delay, s/veh	2.5					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↖	↗	↑	↖	↑	
Traffic Vol, veh/h	7	6	5	3	8	40
Future Vol, veh/h	7	6	5	3	8	40
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	-	325	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	77	77	77	77	77	77
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	9	8	6	4	10	52
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	80	8	0	0	10	0
Stage 1	8	-	-	-	-	-
Stage 2	72	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	922	1074	-	-	1610	-
Stage 1	1015	-	-	-	-	-
Stage 2	951	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	916	1074	-	-	1610	-
Mov Cap-2 Maneuver	916	-	-	-	-	-
Stage 1	1015	-	-	-	-	-
Stage 2	945	-	-	-	-	-
Approach	WB	NB	SB			
HCM Control Delay, s	8.7	0	1.2			
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	916	1074	1610	-
HCM Lane V/C Ratio	-	-	0.01	0.007	0.006	-
HCM Control Delay (s)	-	-	9	8.4	7.3	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0	0	0	-



Phase Number	2	4	6
Movement	EBTL	SBL	WBT
Lead/Lag			
Lead-Lag Optimize			
Recall Mode	C-Max	None	C-Max
Maximum Split (s)	25	35	25
Maximum Split (%)	41.7%	58.3%	41.7%
Minimum Split (s)	11	31.5	20
Yellow Time (s)	4	4	4
All-Red Time (s)	2	2	2
Minimum Initial (s)	5	5	5
Vehicle Extension (s)	3	3	3
Minimum Gap (s)	3	3	3
Time Before Reduce (s)	0	0	0
Time To Reduce (s)	0	0	0
Walk Time (s)			5
Flash Dont Walk (s)			9
Dual Entry	Yes	Yes	Yes
Inhibit Max	Yes	Yes	Yes
Start Time (s)	0	25	0
End Time (s)	25	0	25
Yield/Force Off (s)	19	54	19
Yield/Force Off 170(s)	19	54	10
Local Start Time (s)	0	25	0
Local Yield (s)	19	54	19
Local Yield 170(s)	19	54	10
Intersection Summary			
Cycle Length	60		
Control Type	Actuated-Coordinated		
Natural Cycle	55		
Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green			

Splits and Phases: 5: Rolling Thunder Way & Foxtail Meadow Ln

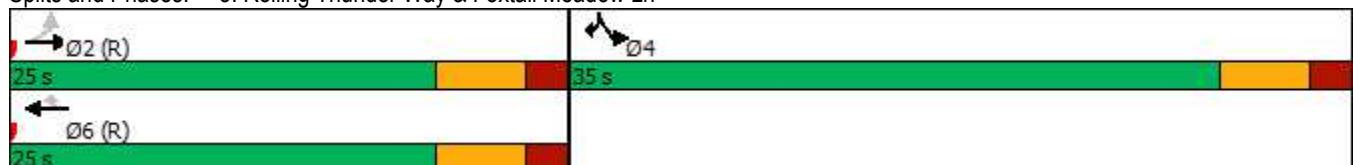

WALMART FUEL STATIONS #4335 TIA
Timing Plan: AM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Proposed Conditions AM 2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	7	134	73	2	43	5
Future Volume (veh/h)	7	134	73	2	43	5
Initial Q (Q _b), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No	No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	8	146	79	2	47	5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2
Cap, veh/h	1096	1406	1406	1191	86	77
Arrive On Green	0.75	0.75	0.75	0.75	0.05	0.05
Sat Flow, veh/h	1317	1870	1870	1585	1781	1585
Grp Volume(v), veh/h	8	146	79	2	47	5
Grp Sat Flow(s), veh/h/ln	1317	1870	1870	1585	1781	1585
Q Serve(g_s), s	0.1	1.3	0.7	0.0	1.5	0.2
Cycle Q Clear(g_c), s	0.8	1.3	0.7	0.0	1.5	0.2
Prop In Lane	1.00			1.00	1.00	1.00
Lane Grp Cap(c), veh/h	1096	1406	1406	1191	86	77
V/C Ratio(X)	0.01	0.10	0.06	0.00	0.55	0.07
Avail Cap(c_a), veh/h	1096	1406	1406	1191	861	766
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.98	0.98	1.00	1.00
Uniform Delay (d), s/veh	2.0	2.0	1.9	1.9	27.9	27.3
Incr Delay (d2), s/veh	0.0	0.1	0.1	0.0	5.3	0.4
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	0.2	0.1	0.0	0.8	0.1
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	2.0	2.2	2.0	1.9	33.2	27.6
LnGrp LOS	A	A	A	A	C	C
Approach Vol, veh/h	154	81		52		
Approach Delay, s/veh	2.1	2.0		32.7		
Approach LOS	A	A		C		
Timer - Assigned Phs	2		4		6	
Phs Duration (G+Y+R _c), s	51.1		8.9		51.1	
Change Period (Y+R _c), s	6.0		6.0		6.0	
Max Green Setting (Gmax), s	19.0		29.0		19.0	
Max Q Clear Time (g_c+l1), s	3.3		3.5		2.7	
Green Ext Time (p_c), s	0.4		0.1		0.2	
Intersection Summary						
HCM 6th Ctrl Delay		7.6				
HCM 6th LOS		A				

WALMART FUEL STATIONS #4335 TIA

Timing Plan: AM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Proposed Conditions AM 2023



Phase Number	1	2	4	5	6	8
Movement	WBL	EBT	SBTL	EBL	WBT	NBTL
Lead/Lag	Lag	Lead		Lead	Lag	
Lead-Lag Optimize	Yes	Yes		Yes	Yes	
Recall Mode	None	Max	C-Max	None	Max	C-Max
Maximum Split (s)	11	32	32	11	32	32
Maximum Split (%)	14.7%	42.7%	42.7%	14.7%	42.7%	42.7%
Minimum Split (s)	11	32	32	11	32	32
Yellow Time (s)	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2
Minimum Initial (s)	5	5	5	5	5	5
Vehicle Extension (s)	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0
Walk Time (s)		5	5		5	5
Flash Dont Walk (s)		21	21		21	21
Dual Entry	Yes	Yes	Yes	No	Yes	Yes
Inhibit Max	Yes	Yes	Yes	Yes	Yes	Yes
Start Time (s)	21	64	32	64	0	32
End Time (s)	32	21	64	0	32	64
Yield/Force Off (s)	26	15	58	69	26	58
Yield/Force Off 170(s)	26	69	37	69	5	37
Local Start Time (s)	64	32	0	32	43	0
Local Yield (s)	69	58	26	37	69	26
Local Yield 170(s)	69	37	5	37	48	5

Intersection Summary


Cycle Length 75

Control Type Actuated-Coordinated

Natural Cycle 75

Offset: 32 (43%), Referenced to phase 4:SBTL and 8:NBTL, Start of Green

Splits and Phases: 6: Meridian Rd & Rolling Thunder Way

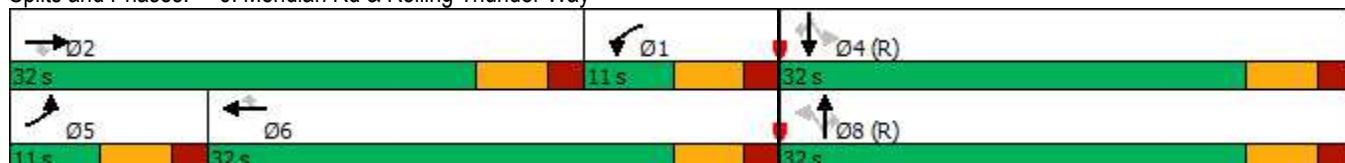

WALMART FUEL STATIONS #4335 TIA

Timing Plan: AM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Proposed Conditions AM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (veh/h)	32	14	131	52	20	13	45	328	28	11	953	13
Future Volume (veh/h)	32	14	131	52	20	13	45	328	28	11	953	13
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No			No			No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	34	15	138	55	21	14	47	345	29	12	1003	14
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	117	648	549	110	1331	594	150	1250	557	380	1250	557
Arrive On Green	0.03	0.35	0.35	0.06	0.37	0.37	0.35	0.35	0.35	0.35	0.35	0.35
Sat Flow, veh/h	3456	1870	1585	1781	3554	1585	554	3554	1585	1009	3554	1585
Grp Volume(v), veh/h	34	15	138	55	21	14	47	345	29	12	1003	14
Grp Sat Flow(s), veh/h/ln	1728	1870	1585	1781	1777	1585	554	1777	1585	1009	1777	1585
Q Serve(g_s), s	0.7	0.4	4.7	2.2	0.3	0.4	6.3	5.2	0.9	0.6	19.1	0.4
Cycle Q Clear(g_c), s	0.7	0.4	4.7	2.2	0.3	0.4	25.4	5.2	0.9	5.9	19.1	0.4
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	117	648	549	110	1331	594	150	1250	557	380	1250	557
V/C Ratio(X)	0.29	0.02	0.25	0.50	0.02	0.02	0.31	0.28	0.05	0.03	0.80	0.03
Avail Cap(c_a), veh/h	230	648	549	119	1331	594	150	1250	557	380	1250	557
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	35.4	16.1	17.5	34.1	14.8	14.8	33.4	17.5	16.1	19.6	22.0	15.9
Incr Delay (d2), s/veh	1.4	0.1	1.1	3.5	0.0	0.1	5.4	0.5	0.2	0.2	5.5	0.1
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.3	0.2	1.8	1.0	0.1	0.2	1.0	2.1	0.3	0.2	8.2	0.2
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	36.7	16.2	18.6	37.6	14.8	14.9	38.8	18.0	16.2	19.7	27.5	16.0
LnGrp LOS	D	B	B	D	B	B	D	B	B	B	C	B
Approach Vol, veh/h	187				90			421			1029	
Approach Delay, s/veh	21.7				28.7			20.2			27.2	
Approach LOS	C				C			C			C	
Timer - Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+R _c), s	10.6	32.0		32.4	8.5	34.1		32.4				
Change Period (Y+R _c), s	6.0	6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s	5.0	26.0		26.0	5.0	26.0		26.0				
Max Q Clear Time (g_c+l1), s	4.2	6.7		21.1	2.7	2.4		27.4				
Green Ext Time (p_c), s	0.0	0.4		2.1	0.0	0.1		0.0				
Intersection Summary												
HCM 6th Ctrl Delay				25.0								
HCM 6th LOS				C								

WALMART FUEL STATIONS #4335 TIA

7: Meridian Rd & Meridian Market View

Timing Plan: AM Peak Hour

Proposed Conditions AM 2023

Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (vph)	0	0	9	0	0	72	0	317	0	0	1061	50
Future Volume (vph)	0	0	9	0	0	72	0	317	0	0	1061	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	0		130	0		0
Storage Lanes	0		1	0		1	0		1	0		1
Taper Length (ft)	75			75			75			75		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt			0.865			0.865						0.850
Flt Protected												
Satd. Flow (prot)	0	0	1611	0	0	1611	0	3539	1863	0	3539	1583
Flt Permitted												
Satd. Flow (perm)	0	0	1611	0	0	1611	0	3539	1863	0	3539	1583
Link Speed (mph)		30			30			35			35	
Link Distance (ft)		228			234			551			701	
Travel Time (s)		5.2			5.3			10.7			13.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	10	0	0	78	0	345	0	0	1153	54
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	10	0	0	78	0	345	0	0	1153	54
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			24			24	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		48			48			48			48	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	62		62	62		62	62		62	62		62
Sign Control		Free			Free			Free			Free	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	39.3%							ICU Level of Service A				
Analysis Period (min)	15											

WALMART FUEL STATIONS #4335 TIA

1: Foxtail Meadow Ln & E Woodmen Rd

Timing Plan: PM Peak Hour

Proposed Conditions PM 2023



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↗		↑↑		↗
Traffic Volume (vph)	1210	80	0	974	0	46
Future Volume (vph)	1210	80	0	974	0	46
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Grade (%)	15%			0%	0%	
Storage Length (ft)		545	0		0	0
Storage Lanes		1	0		0	1
Taper Length (ft)			25		25	
Lane Util. Factor	0.95	1.00	1.00	0.95	1.00	1.00
Fr _t		0.850			0.865	
Flt Protected						
Satd. Flow (prot)	3274	1465	0	3539	0	1611
Flt Permitted						
Satd. Flow (perm)	3274	1465	0	3539	0	1611
Link Speed (mph)	55			45	30	
Link Distance (ft)	878			999	879	
Travel Time (s)	10.9			15.1	20.0	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	1247	82	0	1004	0	47
Shared Lane Traffic (%)						
Lane Group Flow (vph)	1247	82	0	1004	0	47
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	62			62	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	16		16	9
Sign Control	Free			Free	Free	

Intersection Summary

Area Type: Other

Control Type: Unsignalized

Intersection Capacity Utilization 43.4%

ICU Level of Service A

Analysis Period (min) 15

WALMART FUEL STATIONS #4335 TIA

2: Meridian Rd & E Woodmen Rd

Timing Plan: PM Peak Hour

Proposed Conditions PM 2023



Phase Number	1	2	3	4	5	6	7	8
Movement	WBL	EBT	NBL	SBT	EBL	WBT	SBL	NBT
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize	Yes							
Recall Mode	None	C-Max	None	None	None	C-Max	None	None
Maximum Split (s)	14	54	16	36	31	37	13	39
Maximum Split (%)	11.7%	45.0%	13.3%	30.0%	25.8%	30.8%	10.8%	32.5%
Minimum Split (s)	13	36	13	36	13	36	13	36
Yellow Time (s)	4	4	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2	2	2
Minimum Initial (s)	7	5	7	5	7	5	7	5
Vehicle Extension (s)	3	3	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0	0	0
Walk Time (s)		5		5		5		5
Flash Dont Walk (s)		25		25		25		25
Dual Entry	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Inhibit Max	Yes							
Start Time (s)	89	103	37	53	89	0	37	50
End Time (s)	103	37	53	89	0	37	50	89
Yield/Force Off (s)	97	31	47	83	114	31	44	83
Yield/Force Off 170(s)	97	6	47	58	114	6	44	58
Local Start Time (s)	89	103	37	53	89	0	37	50
Local Yield (s)	97	31	47	83	114	31	44	83
Local Yield 170(s)	97	6	47	58	114	6	44	58

Intersection Summary


Cycle Length 120

Control Type Actuated-Coordinated

Natural Cycle 110

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Splits and Phases: 2: Meridian Rd & E Woodmen Rd

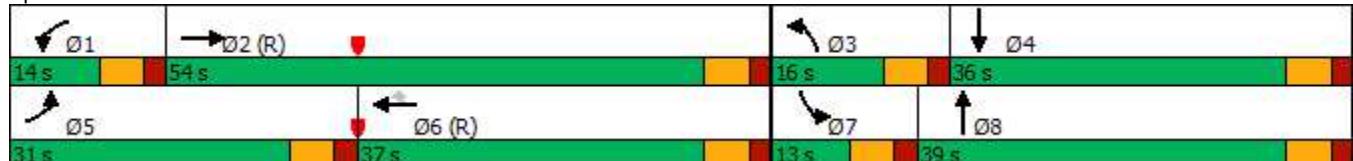

WALMART FUEL STATIONS #4335 TIA

Timing Plan: PM Peak Hour

2: Meridian Rd & E Woodmen Rd

Proposed Conditions PM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑	↑↑	↑↑	↑
Traffic Volume (veh/h)	661	524	140	125	367	137	250	656	90	88	413	397
Future Volume (veh/h)	661	524	140	125	367	137	250	656	90	88	413	397
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	681	540	0	129	378	0	258	676	0	91	426	0
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	720	1635		199	1100		288	796		202	707	
Arrive On Green	0.21	0.46	0.00	0.06	0.31	0.00	0.08	0.22	0.00	0.06	0.20	0.00
Sat Flow, veh/h	3456	3554	1585	3456	3554	1585	3456	3554	1585	3456	3554	1585
Grp Volume(v), veh/h	681	540	0	129	378	0	258	676	0	91	426	0
Grp Sat Flow(s), veh/h/ln	1728	1777	1585	1728	1777	1585	1728	1777	1585	1728	1777	1585
Q Serve(g_s), s	23.3	11.6	0.0	4.4	9.9	0.0	8.9	21.9	0.0	3.1	13.1	0.0
Cycle Q Clear(g_c), s	23.3	11.6	0.0	4.4	9.9	0.0	8.9	21.9	0.0	3.1	13.1	0.0
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	720	1635		199	1100		288	796		202	707	
V/C Ratio(X)	0.95	0.33		0.65	0.34		0.90	0.85		0.45	0.60	
Avail Cap(c_a), veh/h	720	1635		230	1100		288	977		202	888	
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
Uniform Delay (d), s/veh	46.8	20.6	0.0	55.4	32.0	0.0	54.5	44.6	0.0	54.6	43.7	0.0
Incr Delay (d2), s/veh	21.3	0.5	0.0	5.0	0.9	0.0	28.1	6.1	0.0	1.6	0.8	0.0
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	11.8	4.7	0.0	2.0	4.2	0.0	4.9	10.2	0.0	1.4	5.8	0.0
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	68.2	21.2	0.0	60.4	32.9	0.0	82.6	50.7	0.0	56.2	44.6	0.0
LnGrp LOS	E	C		E	C		F	D		E	D	
Approach Vol, veh/h	1221				507			934			517	
Approach Delay, s/veh	47.4				39.9			59.5			46.6	
Approach LOS		D			D			E			D	
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	12.9	61.2	16.0	29.9	31.0	43.1	13.0	32.9				
Change Period (Y+Rc), s	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0				
Max Green Setting (Gmax), s	8.0	48.0	10.0	30.0	25.0	31.0	7.0	33.0				
Max Q Clear Time (g_c+l1), s	6.4	13.6	10.9	15.1	25.3	11.9	5.1	23.9				
Green Ext Time (p_c), s	0.0	2.1	0.0	2.3	0.0	1.3	0.0	3.0				
Intersection Summary												
HCM 6th Ctrl Delay			49.6									
HCM 6th LOS			D									
Notes												
Unsignalized Delay for [NBR, EBR, WBR, SBR] is excluded from calculations of the approach delay and intersection delay.												

Intersection											
Int Delay, s/veh	4.3										
Movement	SBL	SBR	NWL	NWR	NEL	NET	NER	SWL	SWT	SWR	
Lane Configurations											
Traffic Vol, veh/h	0	116	0	0	141	666	12	417	377	28	
Future Vol, veh/h	0	116	0	0	141	666	12	417	377	28	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Stop	Stop	Free	Free	Free	Free	Free	Free	
RT Channelized	-	Free	-	-	-	-	None	-	-	None	
Storage Length	-	0	-	0	215	-	215	245	-	0	
Veh in Median Storage, #	1	-	0	-	-	0	-	-	0	-	
Grade, %	0	-	0	-	-	0	-	-	0	-	
Peak Hour Factor	94	94	94	94	94	94	94	94	97	94	
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	
Mvmt Flow	0	123	0	0	150	709	13	444	389	30	
Major/Minor											
Minor1		Major1			Major2						
Conflicting Flow All	-	355	419	0	0	722	0	0	0	0	
Stage 1	-	-	-	-	-	-	-	-	-	-	
Stage 2	-	-	-	-	-	-	-	-	-	-	
Critical Hdwy	-	6.94	4.14	-	-	4.14	-	-	-	-	
Critical Hdwy Stg 1	-	-	-	-	-	-	-	-	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	-	-	-	-	
Follow-up Hdwy	-	3.32	2.22	-	-	2.22	-	-	-	-	
Pot Cap-1 Maneuver	0	641	1137	-	-	876	-	-	-	-	
Stage 1	0	-	-	-	-	-	-	-	-	-	
Stage 2	0	-	-	-	-	-	-	-	-	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	-	641	1137	-	-	876	-	-	-	-	
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	-	-	-	
Stage 1	-	-	-	-	-	-	-	-	-	-	
Stage 2	-	-	-	-	-	-	-	-	-	-	
Approach											
NW			NE			SW					
HCM Control Delay, s	11			1.5		6.8					
HCM LOS	B										
Minor Lane/Major Mvmt											
NEL		NET	NER	NWL	Ln1	SWL	SWT	SWR			
Capacity (veh/h)	1137	-	-	641	876	-	-	-			
HCM Lane V/C Ratio	0.132	-	-	0.056	0.506	-	-	-			
HCM Control Delay (s)	8.6	-	-	11	13.2	-	-	-			
HCM Lane LOS	A	-	-	B	B	-	-	-			
HCM 95th %tile Q(veh)	0.5	-	-	0.2	2.9	-	-	-			

Intersection						
Int Delay, s/veh	5.7					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Vol, veh/h	54	36	5	38	36	25
Future Vol, veh/h	54	36	5	38	36	25
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	0	-	-	325	-
Veh in Median Storage, #	0	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	82	82	82	82	82	82
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	66	44	6	46	44	30
Major/Minor	Minor1	Major1		Major2		
Conflicting Flow All	147	29	0	0	52	0
Stage 1	29	-	-	-	-	-
Stage 2	118	-	-	-	-	-
Critical Hdwy	6.42	6.22	-	-	4.12	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	-	-	2.218	-
Pot Cap-1 Maneuver	845	1046	-	-	1554	-
Stage 1	994	-	-	-	-	-
Stage 2	907	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	821	1046	-	-	1554	-
Mov Cap-2 Maneuver	821	-	-	-	-	-
Stage 1	994	-	-	-	-	-
Stage 2	882	-	-	-	-	-
Approach	WB	NB		SB		
HCM Control Delay, s	9.3	0		4.4		
HCM LOS	A					
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	WBLn2	SBL	SBT
Capacity (veh/h)	-	-	821	1046	1554	-
HCM Lane V/C Ratio	-	-	0.08	0.042	0.028	-
HCM Control Delay (s)	-	-	9.8	8.6	7.4	-
HCM Lane LOS	-	-	A	A	A	-
HCM 95th %tile Q(veh)	-	-	0.3	0.1	0.1	-

WALMART FUEL STATIONS #4335 TIA
Timing Plan: PM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Proposed Conditions PM 2023



Phase Number	2	4	6
Movement	EBTL	SBL	WBT
Lead/Lag			
Lead-Lag Optimize			
Recall Mode	C-Max	None	C-Max
Maximum Split (s)	27	33	27
Maximum Split (%)	45.0%	55.0%	45.0%
Minimum Split (s)	11	31.5	20
Yellow Time (s)	4	4	4
All-Red Time (s)	2	2	2
Minimum Initial (s)	5	5	5
Vehicle Extension (s)	3	3	3
Minimum Gap (s)	3	3	3
Time Before Reduce (s)	0	0	0
Time To Reduce (s)	0	0	0
Walk Time (s)			5
Flash Dont Walk (s)			9
Dual Entry	Yes	Yes	Yes
Inhibit Max	Yes	Yes	Yes
Start Time (s)	0	27	0
End Time (s)	27	0	27
Yield/Force Off (s)	21	54	21
Yield/Force Off 170(s)	21	54	12
Local Start Time (s)	0	27	0
Local Yield (s)	21	54	21
Local Yield 170(s)	21	54	12

Intersection Summary


Cycle Length 60

Control Type Actuated-Coordinated

Natural Cycle 55

Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBT, Start of Green

Splits and Phases: 5: Rolling Thunder Way & Foxtail Meadow Ln

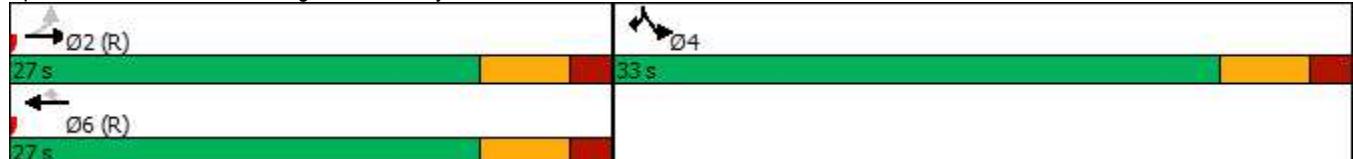

WALMART FUEL STATIONS #4335 TIA
Timing Plan: PM Peak Hour

5: Rolling Thunder Way & Foxtail Meadow Ln
Proposed Conditions PM 2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↑	↑	↑	↑	↑	↑
Traffic Volume (veh/h)	19	93	128	28	36	35
Future Volume (veh/h)	19	93	128	28	36	35
Initial Q (Q _b), veh	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00			1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach		No	No		No	
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	21	101	139	30	39	38
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2
Cap, veh/h	994	1384	1384	1173	107	95
Arrive On Green	0.74	0.74	0.74	0.74	0.06	0.06
Sat Flow, veh/h	1216	1870	1870	1585	1781	1585
Grp Volume(v), veh/h	21	101	139	30	39	38
Grp Sat Flow(s), veh/h/ln	1216	1870	1870	1585	1781	1585
Q Serve(g_s), s	0.3	0.9	1.3	0.3	1.3	1.4
Cycle Q Clear(g_c), s	1.5	0.9	1.3	0.3	1.3	1.4
Prop In Lane	1.00			1.00	1.00	1.00
Lane Grp Cap(c), veh/h	994	1384	1384	1173	107	95
V/C Ratio(X)	0.02	0.07	0.10	0.03	0.36	0.40
Avail Cap(c_a), veh/h	994	1384	1384	1173	802	713
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	0.99	0.99	1.00	1.00
Uniform Delay (d), s/veh	2.4	2.1	2.2	2.1	27.1	27.1
Incr Delay (d2), s/veh	0.0	0.1	0.1	0.0	2.1	2.7
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.0	0.2	0.2	0.1	0.6	0.6
Unsig. Movement Delay, s/veh						
LnGrp Delay(d), s/veh	2.5	2.3	2.3	2.1	29.1	29.8
LnGrp LOS	A	A	A	A	C	C
Approach Vol, veh/h	122	169		77		
Approach Delay, s/veh	2.3	2.3		29.5		
Approach LOS	A	A		C		
Timer - Assigned Phs	2		4		6	
Phs Duration (G+Y+R _c), s	50.4		9.6		50.4	
Change Period (Y+R _c), s	6.0		6.0		6.0	
Max Green Setting (Gmax), s	21.0		27.0		21.0	
Max Q Clear Time (g_c+l1), s	3.5		3.4		3.3	
Green Ext Time (p_c), s	0.3		0.2		0.4	
Intersection Summary						
HCM 6th Ctrl Delay		8.0				
HCM 6th LOS		A				

WALMART FUEL STATIONS #4335 TIA

Timing Plan: PM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Proposed Conditions PM 2023



Phase Number	1	2	4	5	6	8
Movement	WBL	EBT	SBTL	EBL	WBT	NBTL
Lead/Lag	Lag	Lead		Lead	Lag	
Lead-Lag Optimize	Yes	Yes		Yes	Yes	
Recall Mode	None	Max	C-Max	None	Max	C-Max
Maximum Split (s)	11	32	32	11	32	32
Maximum Split (%)	14.7%	42.7%	42.7%	14.7%	42.7%	42.7%
Minimum Split (s)	11	32	32	11	32	32
Yellow Time (s)	4	4	4	4	4	4
All-Red Time (s)	2	2	2	2	2	2
Minimum Initial (s)	5	5	5	5	5	5
Vehicle Extension (s)	3	3	3	3	3	3
Minimum Gap (s)	3	3	3	3	3	3
Time Before Reduce (s)	0	0	0	0	0	0
Time To Reduce (s)	0	0	0	0	0	0
Walk Time (s)		5	5		5	5
Flash Dont Walk (s)		21	21		21	21
Dual Entry	Yes	Yes	Yes	No	Yes	Yes
Inhibit Max	Yes	Yes	Yes	Yes	Yes	Yes
Start Time (s)	21	64	32	64	0	32
End Time (s)	32	21	64	0	32	64
Yield/Force Off (s)	26	15	58	69	26	58
Yield/Force Off 170(s)	26	69	37	69	5	37
Local Start Time (s)	64	32	0	32	43	0
Local Yield (s)	69	58	26	37	69	26
Local Yield 170(s)	69	37	5	37	48	5

Intersection Summary


Cycle Length 75

Control Type Actuated-Coordinated

Natural Cycle 75

Offset: 32 (43%), Referenced to phase 4:SBTL and 8:NBTL, Start of Green

Splits and Phases: 6: Meridian Rd & Rolling Thunder Way

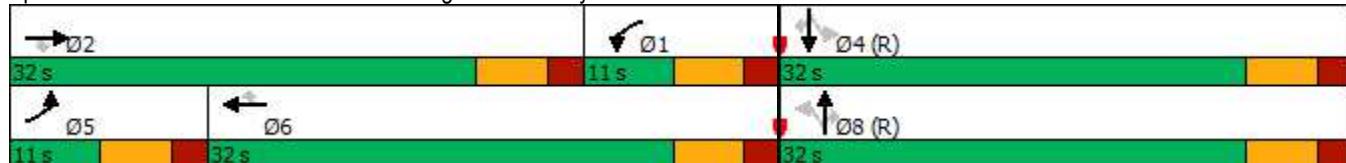

WALMART FUEL STATIONS #4335 TIA

Timing Plan: PM Peak Hour

6: Meridian Rd & Rolling Thunder Way

Proposed Conditions PM 2023

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑	↑	↑	↑	↑↑	↑	↑↑	↑↑	↑	↑	↑↑	↑
Traffic Volume (veh/h)	48	16	67	21	37	41	86	711	60	51	388	39
Future Volume (veh/h)	48	16	67	21	37	41	86	711	60	51	388	39
Initial Q (Q _b), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	51	17	71	22	39	43	91	748	63	54	408	41
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	151	648	549	114	1304	582	345	1241	554	214	1241	554
Arrive On Green	0.04	0.35	0.35	0.06	0.37	0.37	0.35	0.35	0.35	0.35	0.35	0.35
Sat Flow, veh/h	3456	1870	1585	1781	3554	1585	941	3554	1585	673	3554	1585
Grp Volume(v), veh/h	51	17	71	22	39	43	91	748	63	54	408	41
Grp Sat Flow(s), veh/h/ln	1728	1870	1585	1781	1777	1585	941	1777	1585	673	1777	1585
Q Serve(g_s), s	1.1	0.4	2.3	0.9	0.5	1.3	5.9	13.0	2.0	5.4	6.3	1.3
Cycle Q Clear(g_c), s	1.1	0.4	2.3	0.9	0.5	1.3	12.2	13.0	2.0	18.4	6.3	1.3
Prop In Lane	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	151	648	549	114	1304	582	345	1241	554	214	1241	554
V/C Ratio(X)	0.34	0.03	0.13	0.19	0.03	0.07	0.26	0.60	0.11	0.25	0.33	0.07
Avail Cap(c_a), veh/h	230	648	549	119	1304	582	345	1241	554	214	1241	554
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(l)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	34.8	16.2	16.8	33.3	15.2	15.4	22.4	20.1	16.5	27.7	17.9	16.3
Incr Delay (d2), s/veh	1.3	0.1	0.5	0.8	0.0	0.2	1.9	2.2	0.4	2.8	0.7	0.3
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/ln	0.5	0.2	0.9	0.4	0.2	0.5	1.4	5.3	0.7	1.0	2.5	0.5
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	36.1	16.2	17.2	34.1	15.2	15.7	24.3	22.3	17.0	30.5	18.6	16.6
LnGrp LOS	D	B	B	C	B	B	C	C	B	C	B	B
Approach Vol, veh/h	139				104			902		503		
Approach Delay, s/veh	24.0				19.4			22.1		19.7		
Approach LOS	C				B			C		B		
Timer - Assigned Phs	1	2		4	5	6		8				
Phs Duration (G+Y+R _c), s	10.8	32.0		32.2	9.3	33.5		32.2				
Change Period (Y+R _c), s	6.0	6.0		6.0	6.0	6.0		6.0				
Max Green Setting (Gmax), s	5.0	26.0		26.0	5.0	26.0		26.0				
Max Q Clear Time (g_c+l1), s	2.9	4.3		20.4	3.1	3.3		15.0				
Green Ext Time (p_c), s	0.0	0.2		1.1	0.0	0.2		3.0				
Intersection Summary												
HCM 6th Ctrl Delay				21.4								
HCM 6th LOS				C								

WALMART FUEL STATIONS #4335 TIA

7: Meridian Rd & Meridian Market View

Timing Plan: PM Peak Hour

Proposed Conditions PM 2023

Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (vph)	0	0	218	0	0	324	0	672	60	0	604	74
Future Volume (vph)	0	0	218	0	0	324	0	672	60	0	604	74
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	0		130	0		0
Storage Lanes	0		1	0		1	0		1	0		1
Taper Length (ft)	75			75			75			75		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frt			0.865			0.865			0.850			0.850
Flt Protected												
Satd. Flow (prot)	0	0	1611	0	0	1611	0	3539	1583	0	3539	1583
Flt Permitted												
Satd. Flow (perm)	0	0	1611	0	0	1611	0	3539	1583	0	3539	1583
Link Speed (mph)		30			30			35			35	
Link Distance (ft)		228			234			551			701	
Travel Time (s)		5.2			5.3			10.7			13.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	237	0	0	352	0	730	65	0	657	80
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	237	0	0	352	0	730	65	0	657	80
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			24			24	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		48			48			48			48	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	62		62	62		62	62		62	62		62
Sign Control		Free			Free			Free			Free	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	45.3%							ICU Level of Service A				
Analysis Period (min)	15											

Tab Four

Queue & Turn Lane Analysis

S. No.	Intersection Name	Type of Intersection	Movement	Existing Turn Bay Length (ft)	AM		PM		Required Turn Bay Length Yes/No	New Proposed Turn Bay Length (ft)	Remarks
					Existing 95 th % Queue (ft)	Proposed 95 th % Queue (ft)	Existing 95 th % Queue (ft)	Proposed 95 th % Queue (ft)			
1	Woodmen Rd at Foxtail Meadow	Uncontrolled	EBT	-	-	-	-	-			
			EBC	545	-	-	-	-		N.A.	
			WBT	-	-	-	-	-			
2	Meridian Rd at Woodmen Rd	Signalized	EBL	490	194	194	403	403	No	N.A.	
			EBT	121	121	208	208	208			
			EBR	0	0	0	0	0			
			WBL	195	52	53	85	87	No	N.A.	
			WBT	230	230	182	182	182			
			WBR	0	0	20	20	20			
			NBL	455	104	105	182	190	No	N.A.	
			NBT	103	105	316	327	327			
			NBR	0	0	0	0	0			
			SBL	460	38	38	66	66	No	N.A.	
			SBT	409	420	201	208	208			
			SBR	0	0	0	0	0			
3	Meridian Rd at WM Drive/Flower Rd	Two Way Stop Controlled	EBR	-	-	-	-	-			
			WBR	-	-	-	-	-			
			NBL	215	-	-	-	-		N.A.	
			NBT	-	-	-	-	-			
			NBR	215	-	-	-	-		N.A.	
			SBL	245	-	-	-	-		N.A.	
4	Foxtail Meadow Ln at Meridian Market View	Two Way Stop Controlled	SBT	-	-	-	-	-			
			WBL	1	1	7	7	7			
			WBR	1	1	3	3	3			
			NBT	0	0	0	0	0			
			NBR	0	0	0	0	0			
			SBL	325	0	0	2	2	No	N.A.	
5	Foxtail Meadow Ln at Rolling Thunder Way	Signalized	SBT	0	0	0	0	0			
			EBL	66	5	5	8	8	No	N.A.	
			EBT	35	35	24	25	25			
			WBT	21	21	32	32	32			
			WBR	2	2	7	7	7			
			SBL	165	42	42	37	37	No	N.A.	
6	Rolling Thunder Way at Meridian Rd	Signalized	SBR	8	8	23	23	23			
			EBL	313	21	22	28	29	No	N.A.	
			EBT	17	17	19	19	19			
			EBR	38	38	6	6	6			
			WBL	285	69	69	33	33	No	N.A.	
			WBT	11	11	16	16	16			
			WBR	105	0	0	0	0	No	N.A.	
			NBL	53	53	69	70	70			
			NBT	93	95	205	213	213			
			NBR	0	0	0	0	0			
			SBL	280	15	15	52	55	No	N.A.	
			SBT	298	307	108	112	112			
			SBR	0	0	0	0	0			