


INDEX MAP
N.T.S.

WINDINGWALK FILING No. 2 AT MERIDIAN RANCH

A PARCEL OF LAND LOCATED IN A PORTION OF SECTION 29, IN TOWNSHIP 12 SOUTH,
RANGE 64 WEST OF THE 6TH PRINCIPAL MERIDIAN
EL PASO COUNTY, COLORADO.

PLAT NO. 14494

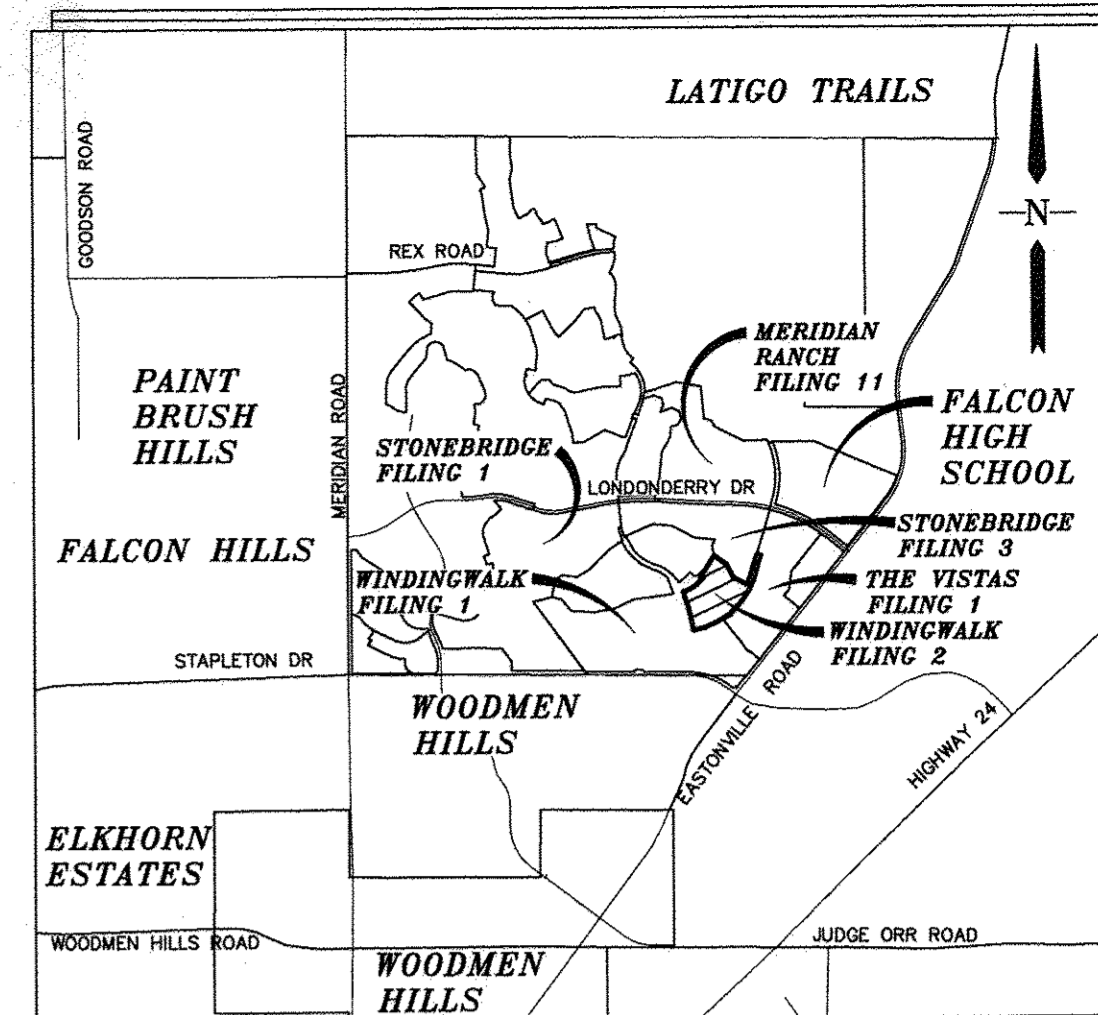

VICINITY MAP
N.T.S.

LEGAL DESCRIPTION:

KNOW ALL MEN BY THESE PRESENTS THAT GTL, INC. DBA GTL DEVELOPMENT, INC., THEODORE CHANG, PRESIDENT BEING THE OWNERS OF THE FOLLOWING DESCRIBED TRACT OF LAND:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTION 29, IN TOWNSHIP 12 SOUTH, RANGE 64 WEST OF THE 6TH PRINCIPAL MERIDIAN, EL PASO COUNTY, COLORADO, MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF LAMBERT ROAD, POINT BEING ON THE WESTERLY BOUNDARY OF THE VISTAS FILING NO. 1 AT MERIDIAN RANCH, RECORDED WITH RECEPTION NO. 217713953 IN THE RECORDS OF EL PASO COUNTY;

THE FOLLOWING SEVEN(7) COURSES ARE ON SAID BOUNDARY:

1. THENCE S72°55'12"E A DISTANCE OF 80.00 FEET;
2. THENCE S17°04'48"W A DISTANCE OF 421.16 FEET TO A CURVE TO THE RIGHT;
3. THENCE ON THE ARC OF SAID CURVE, HAVING A RADIUS OF 1540.00 FEET, A DELTA ANGLE OF 32°34'11", AN ARC LENGTH OF 875.41 FEET, WHOSE LONG CHORD BEARS S33°21'53"W A DISTANCE OF 863.67 FEET;
4. THENCE S05°49'18"W A DISTANCE OF 31.52 FEET;
5. THENCE S51°35'04"W A DISTANCE OF 60.00 FEET;
6. THENCE N82°39'10"W A DISTANCE OF 31.52 FEET TO A NON-TANGENT CURVE TO THE RIGHT;
7. THENCE ON THE ARC OF SAID CURVE, HAVING A RADIUS OF 1540.00 FEET, A DELTA ANGLE OF 03°34'52", AN ARC LENGTH OF 96.25 FEET, WHOSE LONG CHORD BEARS S55°19'35"W A DISTANCE OF 96.24 FEET TO A POINT ON THE BOUNDARY OF WINDINGWALK FILING NO. 1 AT MERIDIAN RANCH, RECORDED WITH RECEPTION NO. 218714220 IN THE RECORDS OF EL PASO COUNTY AND A CURVE TO THE RIGHT;

THE FOLLOWING FOURTEEN (14) COURSES ARE ON SAID BOUNDARY:

8. THENCE ON THE ARC OF SAID CURVE, HAVING A RADIUS OF 1540.00 FEET, A DELTA ANGLE OF 22°25'04", AN ARC LENGTH OF 602.55 FEET, WHOSE LONG CHORD BEARS S68°18'33"W A DISTANCE OF 598.71 FEET;
9. THENCE S79°31'05"W A DISTANCE OF 28.00 FEET;
10. THENCE N10°28'55"W A DISTANCE OF 80.00 FEET;
11. THENCE N02°35'36"W A DISTANCE OF 27.08 FEET;
12. THENCE N12°32'41"W A DISTANCE OF 116.37 FEET;
13. THENCE N12°32'41"W A DISTANCE OF 60.00 FEET;
14. THENCE N13°41'16"W A DISTANCE OF 184.00 FEET;
15. THENCE N19°52'23"W A DISTANCE OF 124.00 FEET;
16. THENCE N18°53'48"W A DISTANCE OF 60.00 FEET;
17. THENCE N18°53'48"W A DISTANCE OF 130.00 FEET;
18. THENCE N67°43'26"E A DISTANCE OF 120.00 FEET;
19. THENCE N59°22'06"E A DISTANCE OF 120.00 FEET;
20. THENCE N46°39'10"E A DISTANCE OF 120.00 FEET;
21. THENCE N50°54'07"E A DISTANCE OF 125.10 FEET;
22. THENCE N48°41'56"W A DISTANCE OF 92.55 FEET;
23. THENCE N48°27'37"E A DISTANCE OF 125.15 FEET;
24. THENCE N32°40'27"E A DISTANCE OF 349.31 FEET TO A POINT ON THE SOUTHERN BOUNDARY OF STONEBRIDGE FILING NO. 3 AT MERIDIAN RANCH, RECORDED WITH RECEPTION NO. 217714053 IN THE RECORDS OF EL PASO COUNTY;

THE FOLLOWING FIVE(5) COURSES ARE ON SAID BOUNDARY:

25. THENCE S55°38'05"E A DISTANCE OF 290.90 FEET;
26. THENCE S28°43'28"E A DISTANCE OF 308.38 FEET;
27. THENCE S8°45'29"E, A DISTANCE OF 294.58 FEET TO A NON-TANGENT CURVE TO THE LEFT;
28. THENCE ON THE ARC OF SAID CURVE, HAVING A RADIUS OF 1460.00 FEET, A DELTA ANGLE OF 08°03'03", AN ARC LENGTH OF 205.15 FEET, WHOSE LONG CHORD BEARS N21°06'20"E A DISTANCE OF 204.98 FEET;
29. THENCE N17°04'48"E A DISTANCE OF 421.16 FEET TO THE POINT OF BEGINNING.

THE ABOVE PARCEL OF LAND CONTAINS 25.092 ACRES, MORE OR LESS.

NOTES:

- 1) BASIS OF BEARINGS FOR THIS DESCRIPTION IS THE NORTH LINE OF THE NORTHWEST QUARTER OF SECTION 19, T12S, R64W OF THE 6TH P.M., WHICH IS ASSUMED TO BEAR S89°18'22" FROM THE NORTHWEST CORNER OF SECTION 19 ((2) REFERENCE MONUMENTS PLS 24964) TO THE NORTH QUARTER CORNER OF SECTION 19 (3.25" ALUM. CAP PLS 24964).
- 2) THERE SHALL BE NO VEHICULAR ACCESS FROM ANY RESIDENTIAL LOT IN THIS SUBDIVISION TO LAMBERT ROAD OR RAINBOW BRIDGE DRIVE.
- 3) ALL LOT LINES ADJACENT TO STREETS ARE HEREBY PLATTED WITH A 10 FOOT EASEMENT FOR PUBLIC UTILITIES AND DRAINAGE PURPOSES. THE ENTIRE AREA OF THESE EASEMENTS ARE HEREBY RESERVED FOR UTILITY PURPOSES, WITH MERIDIAN SERVICE METROPOLITAN DISTRICT AND GTL, INC., DBA GTL DEVELOPMENT, INC. RESERVING THE RIGHT TO PERMIT ANY SUCH UTILITIES. THE SOLE RESPONSIBILITY FOR MAINTENANCE OF THESE EASEMENTS IS VESTED WITH THE INDIVIDUAL PROPERTY OWNERS.
- 4) UNLESS OTHERWISE SHOWN, ALL SIDE LOT LINES ARE HEREBY PLATTED WITH A 5 FOOT PUBLIC UTILITY AND DRAINAGE EASEMENT. THE SOLE RESPONSIBILITY FOR MAINTENANCE OF THESE EASEMENTS IS VESTED WITH THE INDIVIDUAL PROPERTY OWNERS.
- 5) ALL STRUCTURAL FOUNDATIONS SHALL BE LOCATED AND DESIGNED BY A PROFESSIONAL ENGINEER, CURRENTLY REGISTERED IN THE STATE OF COLORADO.
- 6) THE WATER AND SEWER PROVIDER SHALL BE MERIDIAN SERVICE METROPOLITAN DISTRICT.
- 7) NO STRUCTURES OR MATERIAL STORAGE ACTIVITIES ARE PERMITTED WITHIN THE DESIGNATED DRAINAGE EASEMENTS OR NO-BUILD ZONES, EXCEPT FENCES; FENCES SHALL NOT IMPEDE RUNOFF FROM REACHING DRAINAGE SWALES.
- 8) THE FOLLOWING REPORTS HAVE BEEN SUBMITTED AND ARE ON FILE AT THE EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT DEPARTMENT: SOILS AND GEOLOGICAL STUDY; WATER AVAILABILITY STUDY; DRAINAGE REPORT; EROSION CONTROL REPORT; TRAFFIC IMPACT STUDY; FIRE PROTECTION REPORT; NATURAL FEATURES REPORT.
- 9) A DRIVEWAY PERMIT MUST BE ISSUED BY EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT DEPARTMENT PRIOR TO THE ESTABLISHMENT OF ANY DRIVEWAY.
- 10) THE 60 FOOT WIDE PUBLIC HIGHWAY CONTAINED WITHIN THIS PLAT AS ORDERED BY THE BOARD OF COUNTY COMMISSIONERS FOR EL PASO COUNTY ON OCTOBER 3, 1987, AND RECORDED IN ROAD BOOK "A" AT PAGE 78 OF THE RECORDS OF EL PASO COUNTY, IS HEREBY VACATED UPON RECORDED OF THIS PLAT.
- 11) WATER IN THE DENVER BASIN AQUIFERS IS ALLOCATED BASED ON A 100 YEAR AQUIFER LIFE; HOWEVER, FOR EL PASO COUNTY PLANNING PURPOSES, WATER IN THE DENVER BASIN AQUIFERS IS EVALUATED BASED ON A 300 YEAR AQUIFER LIFE. APPLICANTS, THE HOME OWNERS ASSOCIATION, AND ALL FUTURE OWNERS IN THE SUBDIVISION SHOULD BE AWARE THAT THE ECONOMIC LIFE OF A WATER SUPPLY BASED ON WELLS IN A GIVEN DENVER BASIN AQUIFER MAY BE LESS THAN EITHER THE 100 YEARS OR 300 YEARS INDICATED DUE TO ANTICIPATED WATER LEVEL DECREASES. FURTHERMORE, THE WATER SUPPLY PLAN SHOULD NOT RELY SOLELY UPON NON-RENEWABLE AQUIFERS. ALTERNATIVE RENEWABLE WATER RESOURCES SHOULD BE ACQUIRED AND INCORPORATED IN A PERMANENT WATER SUPPLY PLAN THAT PROVIDES FUTURE GENERATIONS WITH A WATER SUPPLY.
- 12) DUE TO POTENTIAL FOR HIGH GROUND WATER IN THE AREA, ALL FOUNDATIONS SHALL INCORPORATE AN UNDERGROUND DRAINAGE SYSTEM.
- 13) DEVELOPER SHALL COMPLY WITH FEDERAL AND STATE LAWS, REGULATIONS, ORDINANCES, REVIEW AND PERMIT REQUIREMENTS, AND OTHER AGENCY REQUIREMENTS, IF ANY OF APPLICABLE AGENCIES INCLUDING, BUT NOT LIMITED TO, THE COLORADO DEPARTMENT OF WILDLIFE, COLORADO DEPARTMENT OF TRANSPORTATION, U.S. ARMY CORPS OF ENGINEERS, THE U.S. FISH & WILDLIFE SERVICE AND/OR COLORADO DEPARTMENT OF WILDLIFE REGARDING THE ENDANGERED SPECIES ACT, PARTICULARLY AS IT RELATES TO THE PREBLE'S MEADOW JUMPING MOUSE AS A LISTED THREATENED SPECIES.
- 14) TRACT A IS HEREBY DEDICATED AS TRAIL, LANDSCAPE, DRAINAGE, AND UTILITY TRACTS TO BE OWNED AND MAINTAINED BY THE MERIDIAN SERVICE METROPOLITAN DISTRICT. THE ENTIRE AREA OF THESE TRACTS IS HEREBY RESERVED FOR UTILITY PURPOSES, WITH MERIDIAN SERVICE METROPOLITAN DISTRICT AND GTL, INC., DBA GTL DEVELOPMENT, INC. RESERVING THE RIGHT TO PERMIT ANY SUCH UTILITIES. ALL OPEN SPACE/LANDSCAPE TRACTS ARE RESTRICTED TO NON-MOTORIZED USE ONLY.
- 15) EASEMENTS AND RIGHT-OF-WAYS WERE BASED ON TITLE COMMITMENT NO. H0539749-710-CTO-SSC BY HERITAGE TITLE COMPANY, DATED FEBRUARY 29, 2020.
- 16) ALL PROPERTY WITHIN THIS SUBDIVISION IS WITHIN THE BOUNDARIES OF THE WOODMEN ROAD METROPOLITAN DISTRICT AND, AS SUCH, IS SUBJECT TO A MILL LEVY, PLATTING FEES AND BUILDING PERMIT FEES FOR THE PURPOSE OF FINANCING CONSTRUCTION OF SPECIFIED IMPROVEMENTS TO WOODMEN ROAD.
- 17) ALL PUBLIC LAND SURVEY INFORMATION AS SHOWN HEREON IS BASED ON A BOUNDARY SURVEY PERFORMED BY URS CORPORATION DATED APRIL 13, 2000. BOUNDARY SURVEY IS RECORDED WITH RECEPTION NUMBER 201900098 OF EL PASO COUNTY RECORDS.
- 18) THIS PLAT IS SUBJECT TO THE TERMS AND CONDITIONS OF THE SUBDIVISION IMPROVEMENTS AGREEMENT AS RECORDED AT RECEPTION NO. 220052509 IN THE OFFICE OF THE CLERK AND RECORDER OF THE EL PASO COUNTY, COLORADO.
- 19) THE PLAT IS REGULATED BY A P.U.D. DEVELOPMENT PLAN FILES PUDSP-18-002 AS RECORDED WITH RECEPTION NO. 218100781 OF THE RECORDS OF EL PASO COUNTY, COLORADO.
- 20) ALL PROPERTY OWNERS ARE RESPONSIBLE FOR MAINTAINING PROPER STORM WATER DRAINAGE IN AND THROUGH THEIR PROPERTY. PUBLIC DRAINAGE EASEMENTS AS SPECIFICALLY NOTED ON THE PLAT SHALL BE MAINTAINED BY THE INDIVIDUAL LOT OWNERS UNLESS OTHERWISE INDICATED. STRUCTURES, FENCES, MATERIALS OR LANDSCAPING THAT COULD IMPEDE THE FLOW OF RUNOFF SHALL NOT BE PLACED IN DRAINAGE EASEMENTS.
- 21) NO LOT OR INTEREST THEREIN, SHALL BE SOLD, CONVEYED OR TRANSFERRED WHETHER BY DEED OR BY CONTRACT, NOR SHALL BUILDING PERMITS BE ISSUED, UNTIL AND UNLESS THE REQUIRED PUBLIC IMPROVEMENTS HAVE BEEN CONSTRUCTED AND COMPLETED IN ACCORDANCE WITH THE SUBDIVISION IMPROVEMENTS AGREEMENT BETWEEN THE APPLICANT AND EL PASO COUNTY AS RECORDED AT RECEPTION NO. 220052509 IN THE OFFICE OF THE CLERK AND RECORDER OF EL PASO COUNTY, COLORADO, OR IN THE ALTERNATIVE, OTHER COLLATERAL IS PROVIDED WHICH IS SUFFICIENT IN THE JUDGMENT OF THE BOARD OF COUNTY COMMISSIONERS, TO MAKE PROVISION FOR THE COMPLETION OF SAID IMPROVEMENTS.
- 22) NO OBSTRUCTION GREATER THAN EIGHTEEN INCHES (18") IS ALLOWED IN A TWENTY-FIVE FOOT (25') BY TWENTY-FIVE FOOT (25') SIGHT TRIANGLE NO-BUILD AREA NEAR ALL CORNER LOTS AT STREET INTERSECTIONS. NO OBSTRUCTION GREATER THAN EIGHTEEN INCHES (18") IS ALLOWED IN A THIRTY FOOT (30') BY THIRTY FOOT (30') SIGHT TRIANGLE NO-BUILD AREA NEAR ALL CORNER LOTS AT STREET INTERSECTIONS ALONG LAMBERT ROAD AND RAINBOW BRIDGE DRIVE.
- 23) MAILBOXES SHALL BE INSTALLED IN ACCORDANCE WITH ALL EL PASO COUNTY DEPARTMENT OF TRANSPORTATION AND UNITED STATES POSTAL SERVICE REGULATIONS.
- 24) THIS SUBDIVISION IS INCLUDED WITHIN THE BOUNDARIES OF THE WOODMEN ROAD METROPOLITAN DISTRICT AND SHALL NOT BE REQUIRED TO PARTICIPATE IN THE EL PASO COUNTY ROAD IMPACT FEE PROGRAM, IN ACCORDANCE WITH THE PROVISIONS OF THE FIRST AMENDMENT TO THE INTERGOVERNMENTAL AGREEMENT CONCERNING WOODMEN ROAD ADOPTED PURSUANT TO RESOLUTION NO. 13-041.
- 25) FLOOD PLAIN: "WINDINGWALK FILING NO. 2 AT MERIDIAN RANCH" IS NOT LOCATED WITHIN ANY DESIGNATED F.E.M.A. FLOOD ZONE AS DEPICTED ON F.E.M.A. FIRM 08041C05526 DATED DECEMBER 7, 2018.
- 26) LOTS 1-60 ACREAGE: 12.550
TRACT A ACREAGE: 4.728
STREETS ACREAGE: 7.814
TOTAL ACREAGE: 25.092
- 27) Pikes Peak Regional Building Encompassing approval provided by email on March 27, 2020, recorded in the El Paso County Clerk & Recorder records at reception number 220052574.

DEDICATION:

THE ABOVE OWNER(S) HAVING CAUSED SAID TRACT OF LAND TO BE PLATTED INTO LOTS, TRACTS, STREETS AND EASEMENTS AS SHOWN ON THE PLAT, WHICH SUBDIVISION SHALL BE ENTITLED "WINDINGWALK FILING NO. 2 AT MERIDIAN RANCH", A SUBDIVISION IN EL PASO COUNTY, COLORADO, ALL STREETS PLATTED ARE HEREBY DEDICATED TO PUBLIC USE AND SAID OWNER DOES HEREBY AGREE THAT ALL PLATTED STREETS WILL BE CONSTRUCTED AND PROPER DRAINAGE PROVIDED AT THE OWNER'S EXPENSE AND ALL TO THE SATISFACTION OF THE BOARD OF COUNTY COMMISSIONERS OF EL PASO COUNTY, COLORADO UPON ACCEPTANCE BY RESOLUTION, ALL STREETS SO DEDICATED WILL BECOME MATTERS OF MAINTENANCE BY EL PASO COUNTY, COLORADO WITH THE EXCEPTION OF MEDIANS WHICH WILL BE MAINTAINED BY THE MERIDIAN SERVICE METROPOLITAN DISTRICT.

IN WITNESS WHEREOF:

GTL, INC. DBA GTL DEVELOPMENT, INC., RAUL GUZMAN, VICE PRESIDENT HAS CAUSED THESE PRESENTS TO BE EXECUTED THIS 2nd DAY OF April 2020

GTL, INC. DBA GTL DEVELOPMENT, INC.


BY: *Raul Guzman*
RAUL GUZMAN, VICE PRESIDENT

STATE OF CALIFORNIA)
COUNTY OF SAN DIEGO) SS

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME THIS 2nd DAY OF April 2020 BY RAUL GUZMAN, VICE PRESIDENT, GTL, INC. DBA GTL DEVELOPMENT, INC.

NOTARY PUBLIC *Nancy Chase* 3995 Kenyon St., #200
SAN DIEGO, CA 92110
ADDRESS

MY COMMISSION EXPIRES: July 26, 2023



MERIDIAN SERVICE METROPOLITAN DISTRICT


BY: *Milton Gabrielski*
MILTON GABRIELSKI, PRESIDENT

STATE OF COLORADO)
COUNTY OF EL PASO) SS

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME THIS 2nd DAY OF April 2020 BY MILTON GABRIELSKI, MERIDIAN SERVICE METROPOLITAN DISTRICT.

NOTARY PUBLIC *Angela Maxey* 9462 Beryl
Peyton CO 80831
ADDRESS

MY COMMISSION EXPIRES: September 19, 2020



SURVEYOR'S CERTIFICATION:

I JAMES F. LENZ, A DULY REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF COLORADO, DO HEREBY CERTIFY THAT THIS PLAT TRULY AND CORRECTLY REPRESENTS THE RESULTS OF A SURVEY MADE ON DATE OF SURVEY, BY ME OR UNDER MY DIRECT SUPERVISION AND THAT ALL MONUMENTS EXIST AS SHOWN HEREON, THAT MATHEMATICAL CLOSURE ERRORS ARE LESS THAN 1:10,000; AND THAT SAID PLAT HAS BEEN PREPARED IN FULL COMPLIANCE WITH ALL APPLICABLE LAWS OF THE STATE OF COLORADO DEALING WITH MONUMENTS, SUBDIVISION, OR SURVEYING OF LAND AND ALL APPLICABLE PROVISIONS OF THE EL PASO COUNTY LAND DEVELOPMENT CODE.



JAMES F. LENZ
PROFESSIONAL LAND SURVEYOR IN THE
STATE OF COLORADO, PLS NO. 34583

NOTICE: ACCORDING TO COLORADO LAW, YOU MUST COMMENCE ANY LEGAL ACTION BASED UPON ANY DEFECT IN THIS SURVEY WITHIN THREE YEARS AFTER YOU FIRST DISCOVER SUCH DEFECT. IN NO EVENT, MAY ANY ACTION BASED UPON ANY DEFECT IN THIS SURVEY BE COMMENCED MORE THAN TEN YEARS FROM THE DATE OF CERTIFICATION SHOWN HEREON.

APPROVALS:

THIS PLAT FOR "WINDINGWALK FILING NO. 2 AT MERIDIAN RANCH" WAS APPROVED FOR FILING BY THE EL PASO COUNTY, COLORADO BOARD OF COUNTY COMMISSIONERS ON THE DAY OF APRIL 20, 2020, SUBJECT TO ANY NOTES SPECIFIED HEREON AND ANY CONDITIONS INCLUDED IN THE RESOLUTION OF APPROVAL. THE DEDICATIONS OF LAND TO THE PUBLIC STREETS AND EASEMENTS ARE ACCEPTED, BUT PUBLIC IMPROVEMENTS THEREON WILL NOT BECOME THE MAINTENANCE RESPONSIBILITY OF EL PASO COUNTY UNTIL PRELIMINARY ACCEPTANCE OF THE PUBLIC IMPROVEMENTS IN ACCORDANCE WITH THE REQUIREMENTS OF THE LAND DEVELOPMENT CODE AND ENGINEERING CRITERIA MANUAL, AND THE SUBDIVISION IMPROVEMENTS AGREEMENT.

BY: *Mark Will*
CHAIR, BOARD OF COUNTY COMMISSIONERS

THIS PLAT FOR "WINDINGWALK FILING NO. 2 AT MERIDIAN RANCH" WAS APPROVED FOR FILING BY THE EL PASO COUNTY, COLORADO PLANNING AND COMMUNITY DEVELOPMENT DEPARTMENT DIRECTOR ON THE DAY OF APRIL 20, 2020, SUBJECT TO ANY NOTES OR CONDITIONS SPECIFIED HEREON.

BY: *Cybil*
PLANNING AND COMMUNITY DEVELOPMENT DIRECTOR

DATE: APRIL 5, 2020

STATE OF COLORADO)
COUNTY OF EL PASO) SS

I HEREBY CERTIFY THIS INSTRUMENT WAS FILED FOR RECORD IN MY OFFICE AT 2:26 O'CLOCK P.M., THIS 11th DAY OF April 2020 AND IS DULY RECORDED AT RECEPTION NUMBER 220714494 OF THE RECORDS OF EL PASO COUNTY, COLORADO.

DEPUTY *Beverly A. Blaud*


FEES:

RECEIPT NO: _____
PLAT FEE: _____
SURCHARGE: _____
SCHOOL: \$0.00
PARK: \$0.00
BRIDGE: \$6,043.00 (Huesler Ranch)
DRAINAGE: \$40,949.00 (Huesler Ranch)

WINDINGWALK FILING No. 2 AT MERIDIAN RANCH



A PARCEL OF LAND LOCATED IN A PORTION OF SECTION 29, IN TOWNSHIP 12 SOUTH,
RANGE 64 WEST OF THE 6TH PRINCIPAL MERIDIAN
EL PASO COUNTY, COLORADO.

14494

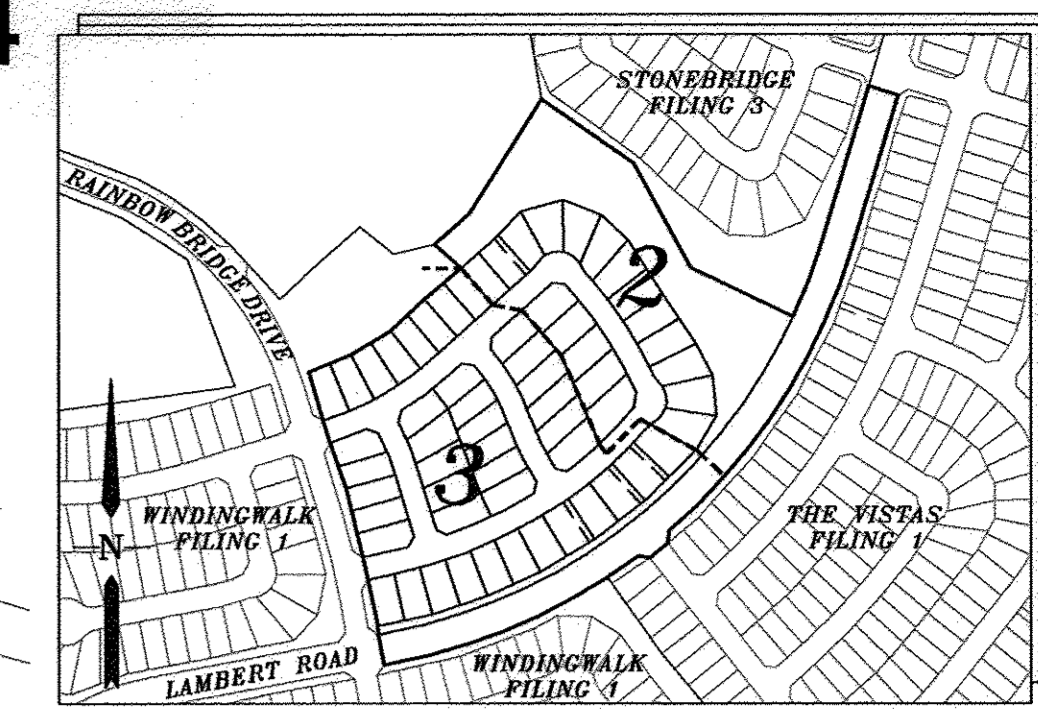


INDEX MAP
N.T.S.

- LEGEND**
- = FOUND MONUMENT AS SHOWN
 - ⊙ = FOUND #4 REBAR WITH CAP PLS 34583
 - = SET #4 REBAR W/CAP PLS 34583
 - NR = NON-RADIAL BEARING
 - (82.62') = EASEMENT OR NO-BUILD DIM.
 - (12.345) = ADDRESS
 - = MATCHLINE

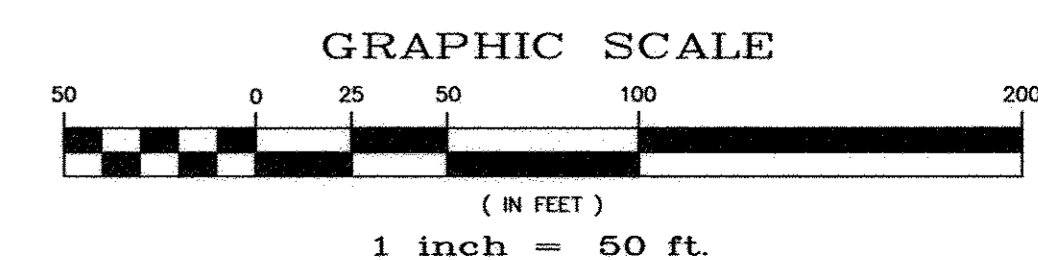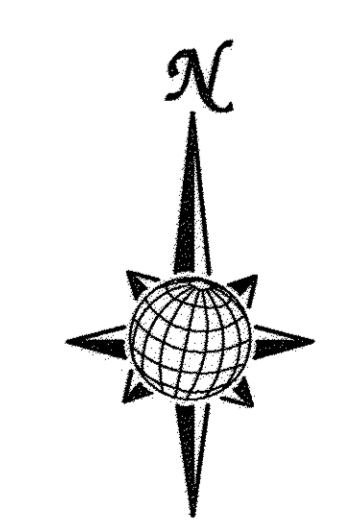

DRAWN BY: LCG DATE: MARCH 2020
CHECKED BY: TAK SHEET: 2 OF 3

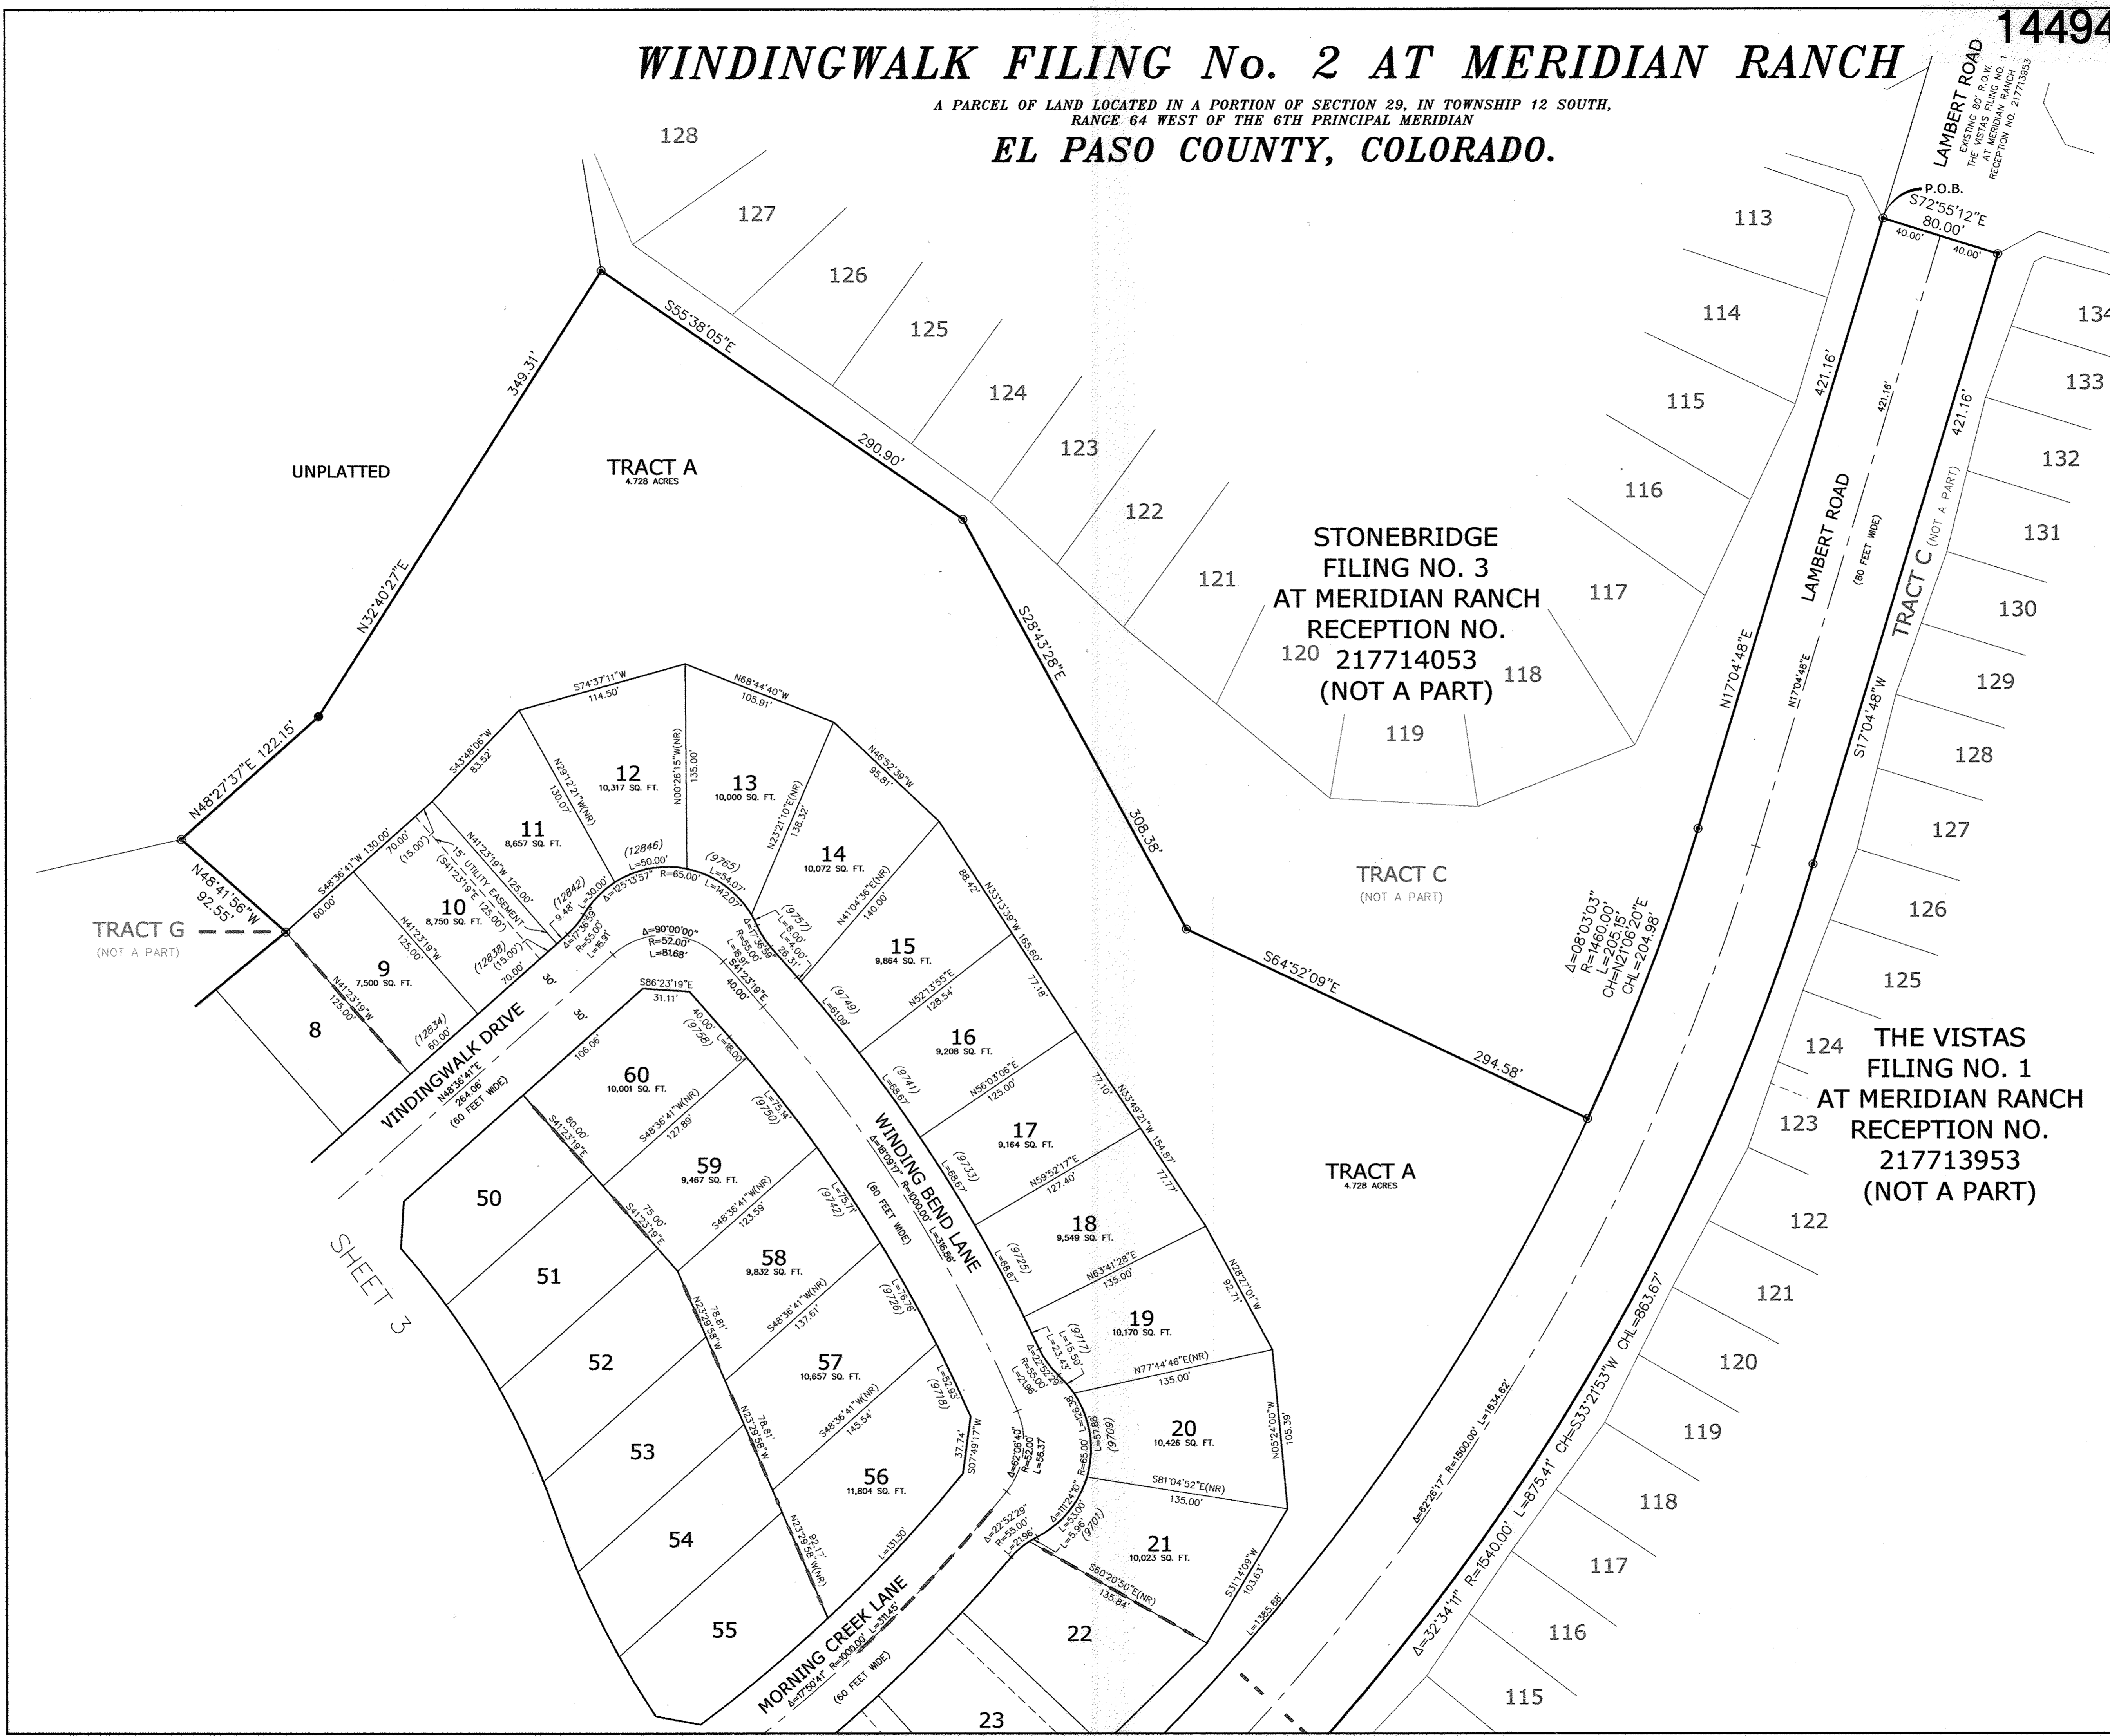


S:\Drawing\City\Windingwalk\2020\WINDINGWALK FILING NO. 2 PLAT AT MERIDIAN RANCH, CO. 20200311 215157.DWG

14494

WINDINGWALK FILING No. 2 AT MERIDIAN RANCH

A PARCEL OF LAND LOCATED IN A PORTION OF SECTION 29, IN TOWNSHIP 12 SOUTH,
RANGE 64 WEST OF THE 6TH PRINCIPAL MERIDIAN
EL PASO COUNTY, COLORADO.

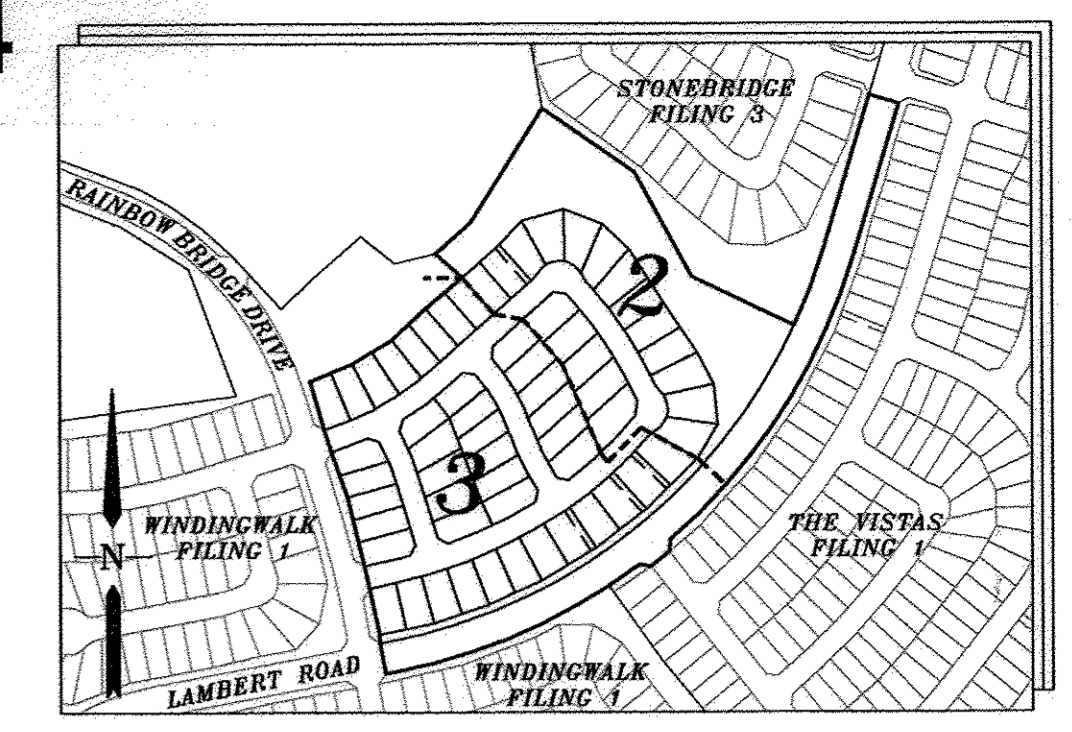




INDEX MAP
N.T.S.

- LEGEND**
- = FOUND MONUMENT AS SHOWN
 - ⊙ = FOUND #4 REBAR WITH CAP PLS 34583
 - ⊙ = SET #4 REBAR W/CAP PLS 34583
 - NR = NON-RADIAL BEARING
 - (82.62') = EASEMENT OR NO-BUILD DIM.
 - (12345) = ADDRESS
 - = MATCHLINE

WINDINGWALK FILING NO. 1
AT MERIDIAN RANCH
RECEPTION NO.
218714220
(NOT A PART)

WINDINGWALK DR.
EXISTING 60' R.O.W.
WINDINGWALK FILING NO. 1
AT MERIDIAN RANCH
RECEPTION NO. 218714220

LAMBERT ROAD
EXISTING 80' R.O.W.
WINDINGWALK FILING NO. 1
AT MERIDIAN RANCH
RECEPTION NO. 18714220

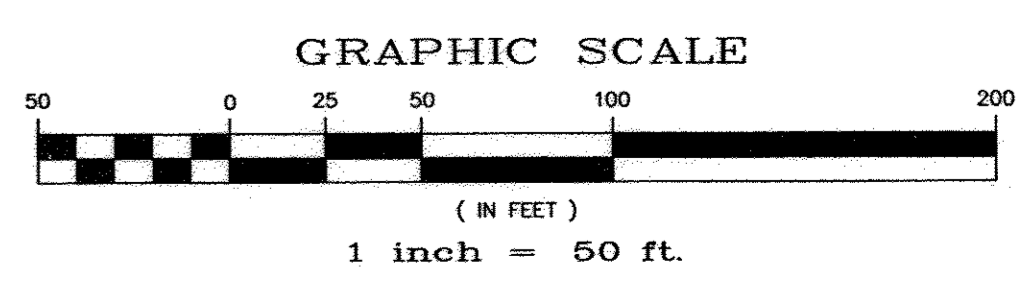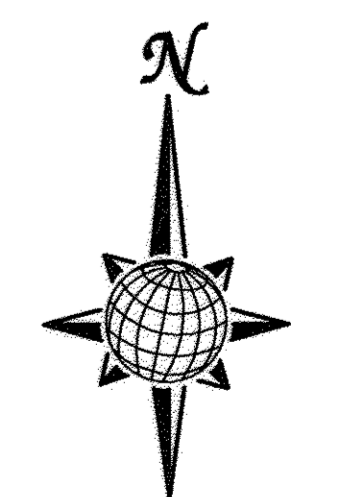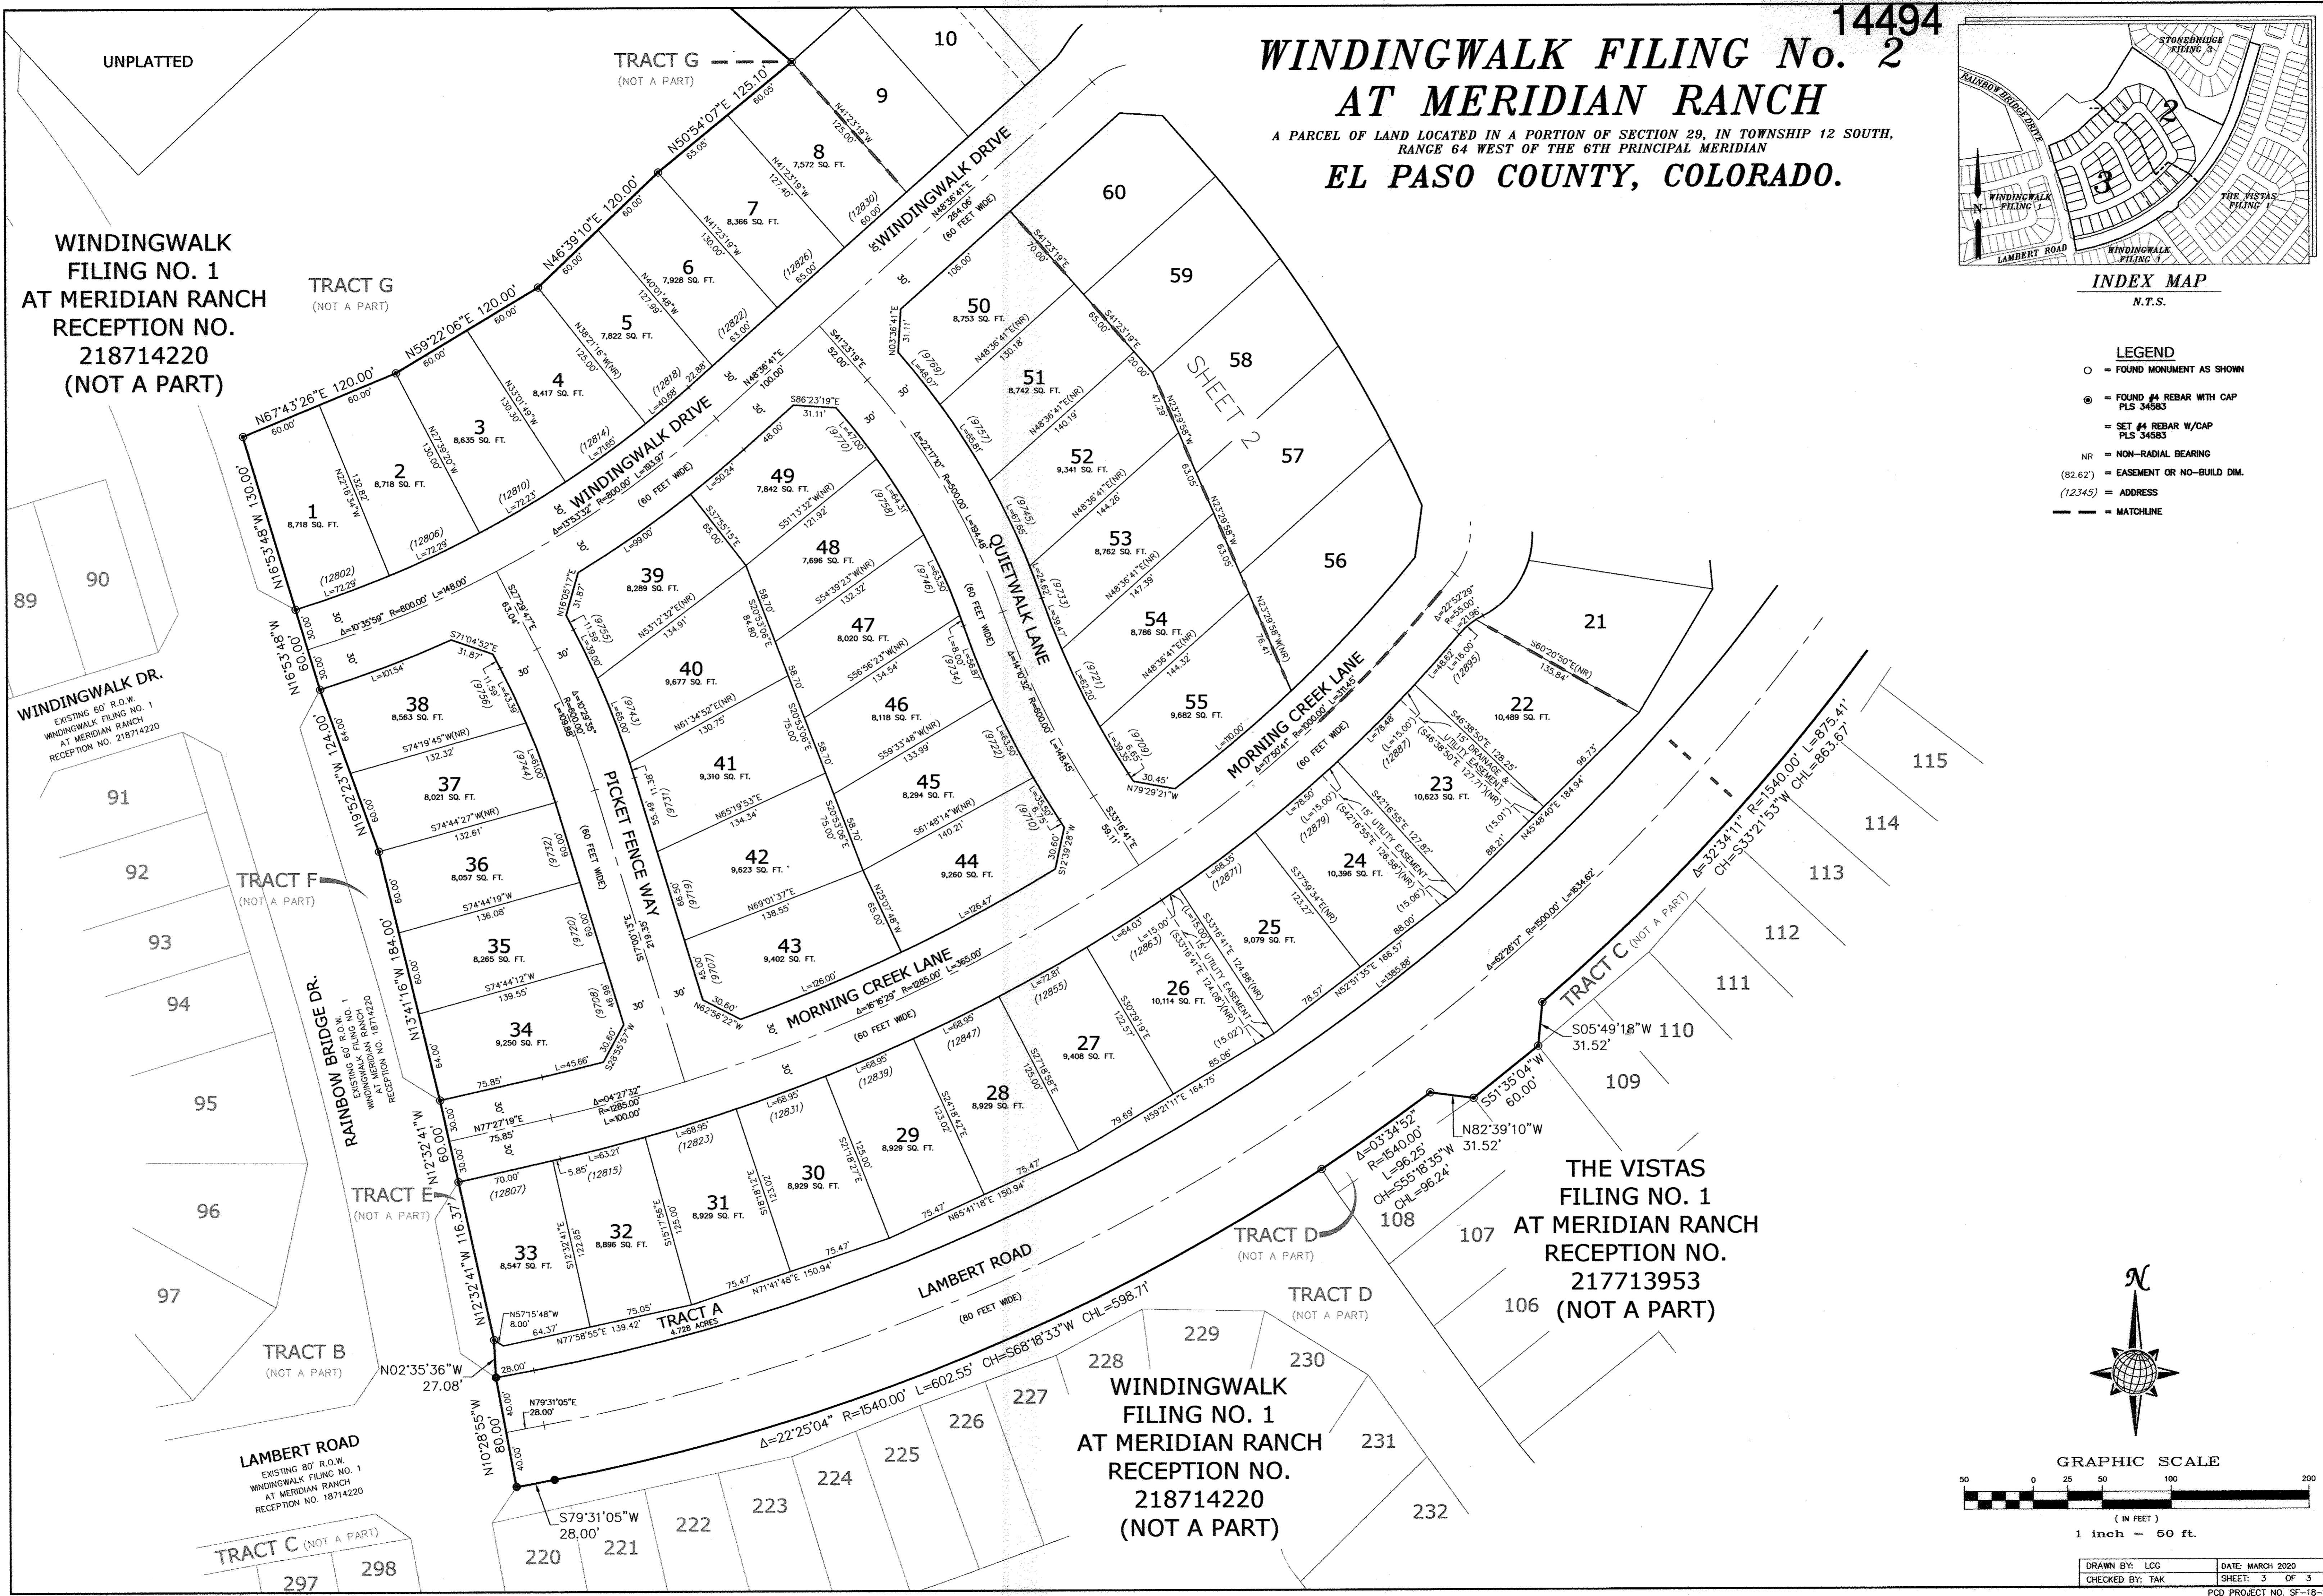

DRAWN BY: LCG DATE: MARCH 2020
 CHECKED BY: TAK SHEET: 3 OF 3
 PCD PROJECT NO. SF-18-022