

CONTOURED LOGO CABINET

SPECIFICATIONS:

Front lit, LED illuminated, contoured logo cabinet, having 3/16" high impact white acrylic face with laminated digital print artwork, 5" black returns and 1" black trim cap.

Illumination Specifications: *ILLUMINATION COMPLIES WITH SECTION 6.2.3 OF THE EL PASO COUNTY LAND DEVELOPMENT PLAN


White LED modules, low voltage power supply, low voltage insulated wiring, UL listed and approved, service/disconnect switch on raceway.

Electrical Specifications:

Property owner and/or client is responsible at their own expense to provide a dedicated 20A circuit for the sign, and is responsible at their own expense to have a qualified licensed electrician make the final connection of the sign to the provided circuit.

Electrical and Attachment Detail:

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN.

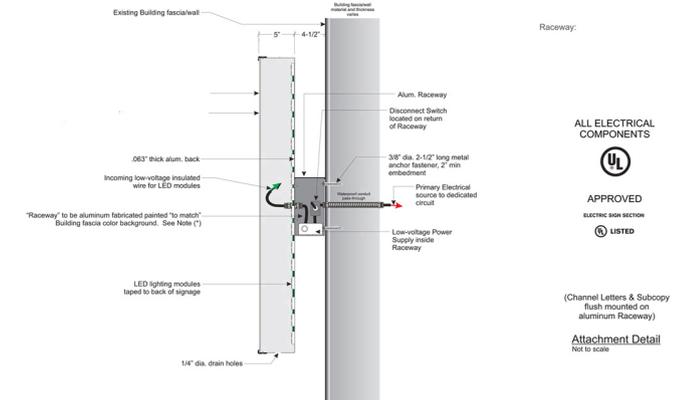

El Nissi Corporation
P.O. Box 63795
Colorado Springs, CO 80962
(719)492-5807

Customer: **NEXT GEAR**
Address: **11852 STAPLETON DRIVE
PEYTON, CO 80831**
Contact: **BRAD EDWARDS
(719)660-5855**

Sign Consultant: **Emil Rock**
Approved by:

Designed by:
KR

Article 600 of the National Electric Code (NEC)

This statement "MUST" go on every technical drawing that has a sign installed in any jurisdiction in the United States

(Note: the "UL" label or logo, is the Underwriters Laboratory icon and must be placed on every electrical sign attachment or installation detail drawing. UL is only one of several certifying agencies in the U.S.)

ALL ELECTRICAL COMPONENTS
APPROVED
UL LISTED
ELECTRIC SIGN SECTION



0 100 200ft