MASTER DEVELOPMENT DRAINAGE PLAN AND PRELIMINARY DRAINAGE REPORT FOR WATERBURY FILINGS NO. 1 & 2 EL PASO COUNTY, COLORADO

PCD FILE NO:
PUDSP-21-005

NOVEMBER 2022

Prepared For:

Prepared for:
4-WAY RANCH JOINT VENTURE
P.O. BOX 50223
COLORADO SPRINGS, CO 80949
Contact: Peter Martz

Prepared By:

TERRA NOVA ENGINEERING, INC.
721 S. 23rd ST.
Colorado Springs, CO 80904

Job No. 1715.00

MASTER DEVELOPMENT DRAINAGE PLAN AND PRELIMINARY DRAINAGE REPORT FOR WATERBURY FILINGS NO. 1 & 2 EL PASO COUNTY, COLORADO

TABLE OF CONTENTS

ENGINEER'S STATEMENT	PAGE 3
INTRODUCTION	PAGE 4
PROJECT CHARACTERISTICS	PAGE 5
FLOODPLAINS STATEMENT	PAGE 6
HYDROLOGIC ANALYSIS FOR MDDP	PAGE 6
Existing Condition Analysis for MDDP	PAGE 7
Early Grading Analysis for MDDP	PAGE 9
Proposed Condition Analysis for MDDP	PAGE 11
HYDRAULIC ANALYSIS FOR MDDP	PAGE 26
HYDROLOGIC ANALYSIS FOR FILING 1 FDR	PAGE 31
DRAINAGE FEES	PAGE 35
SUMMARY	PAGE 36
BIBLIOGRAPHY	PAGE 37

REQUIRED MAPS AND DRAWINGS

VICINITY MAP

S.C.S. SOILS MAP

FEMA FIRM MAP

HYDROLOGIC CALCULATIONS

HYDRUALIC CALCULATIONS

FULL SPECTRUM & WATER QUALITY CALCULATIONS

HEC-RAS ANALYSIS

DRAINAGE MAPS

MASTER DEVELOPMENT DRAINAGE PLAN AND PRELIMINARY DRAINAGE REPORT FOR WATERBURY FILINGS NO. 1 & 2 EL PASO COUNTY, COLORADO

INTRODUCTION

PURPOSE

The purpose of this Master Development Drainage Plan is to identify and analyze the proposed drainage patterns, determine proposed runoff quantities, size drainage structures for conveyance of developed runoff based upon the overall development of single-family homes along with all the supporting infrastructure, while following the guidelines of the 4-step process.

This site was previously submitted as Waterbury Phase 1 Preliminary Plan with 3 separate filings by Classic Consulting Engineers & Surveyors, LLC. The Final Drainage Report for Filing 1 along with the construction drawings were approved in September of 2016 by EL Paso County Development Services and the Final Drainage Report for Filing 2 along with the construction drawings were submitted for review in September of 2017 and comments given back in September of 2017. Filing 3 had been preliminary designed but nothing submitted to EL Paso County. Since this time the owner has revised the lot layout and removed the alleys shown in Filings 1 & 2. All the public roadways have remained the same with the exception of the ROW for Saybrook Road from Stapleton to Bayshore Way, where the it changed from 65' to 89'. With these changes El Paso County Development Services has requested that we submit a new Preliminary Plan and the associated MDDP for these revisions. The site will now be developed in 2 Filings, Filing 1 & Filing 2. A Final Drainage Report will be submitted with the Final Plat and Construction drawings. With the Preliminary Plan submittal an Early Grading Permit is also being submitted. The overall proposed drainage patterns do not differ much and follow the previous studies closely.

DBPS

The Waterbury site lies within the Geick Ranch and the Haegler Drainage Basins, storm runoff drains southerly via 2 existing natural waterways, one bordering the site on the west (Haegler Drainage Basin) and one on the east (Geick Ranch Drainage Basin). The "Haegler Drainage Basin Planning Study" was prepared by URS and approved in June of 2009. Drexel Barrel & Co prepared the "Geick Ranch Drainage Basin Planning Study" submitted for approval February 2008 but it has yet to be

MASTER DEVELOPMENT DRAINAGE PLAN AND PRELIMINARY DRAINAGE REPORT FOR WATERBURY FILINGS NO. 1 & 2 EL PASO COUNTY, COLORADO

DESIGN ENGINEER'S STATEMENT:

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage report has been prepared according to the criteria established by the County for drainage reports and said report is in conformity with the applicable master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors or omissions on my part in preparing this report.

COLORADO REGISTERED QUENTIN N. ARMIJO 37470 PROFESSIONAL ENGINEER

Quentin Armijo, P.E. 37470
On behalf of Terra Nova Engineering, Inc.

7/24/24
Date

OWNER/DEVELOPER'S STATEMENT:

I, the owner/developer have read and will comply with all of the requirements specified in this drainage report and plan.

Authorized Signature

7/25/24
Date

Andrew R. Klein, Authorized Signatory
Printed Name, Title

ACM ALF VIII JV Sub II LLC
Business Name

4100 E Mississippi Ave, Suite 500, Glendale, CO 80246
Address

EL PASO COUNTY:

Filed in accordance with the requirements of the Drainage Criteria Manual, Volumes 1 and 2, El Paso County Engineering Criteria Manual and Land Development Code as amended.

Joshua Palmer, P.E.
County Engineer / ECM Administrator
Conditions:

Date

approved by El Paso County, and therefore there are no drainage fees in this basin. In the Haegler DBPS it is noted that "a portion of the Haegler Ranch as delineated by the County map was found to be part of the Geick Ranch Drainage Basin at Judge Orr Road, due to a lack of a roadway culvert at the crossing. This is excluded from the Haegler Ranch DBPS and is included as part of the Geick Ranch DBPS, per the County." These 2 channels eventually drain to Black Squirrel Creek and ultimately the Arkansas River.

PROJECT CHARACTERISTICS

Waterbury Filings 1 & 2 consists of 61.88 acres and is part of a larger development of 322.0 acres to be developed over time and in multiple filings. A PUD Development Plan, Zoning and Conceptual plans have all been previously processed and approved with El Paso County. Filing 1 is 29.44 acres with 115 single family units, while Filing 2 is 32.44 acres 83 single family lots.

The site is in the SW 1/4 of Sections 28, SE ¼ 29 & NW 1/4 33, Township 12 South, Range 64 West of the 6th Principal Meridian within El Paso County, Colorado. The site is bounded to the west by natural channel and 4-Way Ranch Filing No. 1. To the south by Stapleton Drive. To the north by unplatted land consisting of future Waterbury Filings, and to the west by a natural channel unplatted land consisting of future Waterbury Filings (See vicinity map, Appendix A).

The site consists of 100% Columbine Gravelly (19) per the USDA, NRCS web soil survey. The hydrologic soil group "A" was used to represent the soil types and determine the onsite basin overland flow. (See map in appendix)

The study area consists of undeveloped land that has existing vegetation consisting of established native grasses. A ridge running north to south splits the site with the west 1/3 draining southwest with average slopes of 0% to 3% and the remaining 2/3 drains southwest with average slopes of 0% to 3%. There are no existing on-site improvements.

The site has been analyzed in several approved studies including the following "Revision to the MDDP for Meridian Ranch, EL Paso County, Colorado", approved October 2005, and prepared by PBS&J. "Final Drainage Report for 4-Way Ranch Phase 1" by JR Engineering Dated March 2006. The "Geick Ranch Drainage Basin Planning Study" dated February 2008, and prepared by Drexel

Barrel & Co. The "Preliminary/Final Drainage Report for Meridian Ranch filing No. 3" by Tech Contractors, November 2011. The "Master Development Drainage Plan, 4-Way Ranch – Phase 1" by Advanced Design Professionals, Inc. dated January 2012. The "Preliminary Drainage Report for Waterbury (Phase 1 Preliminary Plan) dated June 2013 by Classic Consulting analyzes this area in more detail and then Classic followed up with the "Final Drainage Report for Waterbury Filing No. 1" dated September 2016 which studied a portion of the area now being developed. Kiowa Engineering also prepared a 2004 LOMR (04-08-0012).

As-built field survey data is the basis for the design of the drainage basins.

FLOODPLAIN STATEMENT

A portion of this site along the western edge is within a designated F.E.M.A. floodplain, as determined by Flood Insurance Rate Map No. 08041C0552G December 7, 2018 (see appendix). The floodplain is shown on the proposed Drainage Map in the appendix along with the FEMA Firmette. Lots from Filings 1 & 2 abut the channel with rear lots lines, but are set to be outside of the floodplain. As mentioned in the previously approved "Final Drainage Report for Waterbury Filing 1" dated September 2016 prepared by Classic Consulting Engineering & Surveying the floodplain was determined by Kiowa Engineering in a 2004 LOMR (04-08-0012) using a HEC-RAS analysis modeling developed flows along the channel from the 3-42" culverts under Eastonville Road south to the existing stock pond (Design Point 13) south of Stapleton Drive with proposed and existing improvements such as the proposed 42" dual culverts located at the Gilbert Road crossing and existing dual 4' x 8' box culverts at Stapleton Drive (see appendix for HEC-RAS model). At the time of Final Platting the Base Floodplain Elevations are required to be shown on the Final Plat.

HYDROLOGIC ANALYSIS FOR MDDP

MAJOR DRAINAGE BASIN

The Waterbury Filing 1 & 2 site lies within the Geick Ranch and Haegler Drainage Basin, storm runoff drains southerly to Black Squirrel Creek via a public piped system and then into Fountain Creek. "Geick Ranch Drainage Basin Planning Study" dated February 2008, and prepared by Drexel Barrel & Co. has been drafted but not yet approved by El Paso County. The Haegler Ranch DBPS, the Drainage Basin Planning Study on file for this basin was prepared by URS and approved in June

of 2009. Drainage and Bridge fees for the part of the site that lies within the Haegler Ranch (diversion to Geick) Basin 28 will not need to pay fees at the time of Final Plat

METHODOLOGY

The El Paso County Drainage Criteria Manual (EPCDCM), dated May 1994 was the resource used in this analysis with the exception for calculating the 5-year and 100-year design storm events. Chapter 6 of the City of Colorado Springs Drainage Criteria Manual (CSDCM) was referenced in determining rainfall and runoff for the proposed drainage system per the EPC DCM1 Update resolution. Runoff was calculated using the Rational Method for developed conditions (see appendix). Runoff coefficients were calculated using weighted impervious values for each specific basin base upon Table 6.6 of the CSDCM. Table 6.5 was used for calculating intensity (see appendix).

EXISTING MAJOR SUBBASIN DESCRIPTION (FOR MDDP)

In the existing condition runoff from Filing 2 sheet flows south onto Filing 1 and from here the runoff is directed southwest and southeast overland to the existing channels on the west and east side of the site. Below is a description of the existing condition's Design Points, Basins and site runoff.

There are 4 offsite basins that drain existing runoff onto the site from the north under Eastonville Road through culverts. There is also unplatted open space just north of the proposed Waterbury Filing No. 1 & 2.

At Design Point 10A 3-42" RCP that routes runoff from a temporary sediment pond south onto the property (Basin OS-5). The "Preliminary/Final Drainage Report for Meridian Ranch Filing No. 3" and shows flows of Q_5 = 28 cfs, Q_{100} = 153 cfs while the Meridian Ranch MDDP shows a 100-year flow of 185 cfs. This larger flow of 185 cfs is used in the HEC-RAS model for downstream channel analysis and culvert design. As mentioned above in the Floodplain Statement section the natural channel along the west side of the site is a recognized FEMA floodplain. This channel in the Haegler Creek Basin drains south to Stapleton Drive where dual 4' high x 8' wide concrete box culverts route the water south in its natural path.

Design Point EX1 consist of onsite Basin EXA's 9.62 acres and offsite Basin OS-5's 6.74 acres,

which both consist of undeveloped open space prairie and the FEMA flood channel and the runoff from Design Point EX10A mentioned above travel in the channel south to the southern boundary of our site. The combined flow from these upstream basins and our onsite basins that contribute to the flow is Q_5 = 38 cfs, Q_{100} = 219 cfs. This report does not analyze the flow coming from the adjacent Subdivision as the culverts were previously sized and installed in the approved Classic Consulting "Final Drainage Report for Waterbury Filing No. 1" dated September 2016.

Design Point EX2 is a point at the southern boundary of Filing 1 where runoff (Q_5 = 1 cfs, Q_{100} = 9 cfs) from Basin EXB's 4.09 acres of undeveloped prairie flow into Stapleton Road.

Design Point EX3 consists of a shallow swale that leave the site at the south east boundary. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin OS-4's 0.29 acres is directed south onto Basin EXC. The runoff (Q_5 = 7 cfs, Q_{100} = 45 cfs) form Basin EXC's 24.80 acres is combined with the Basin's OS-4. The combined runoff (Q_5 = 7 cfs, Q_{100} = 45 cfs) is directed offsite and shortly later in the existing channel in the Geick Ranch Basin.

Design Point EX4 is a point at the eastern boundary of Filing 1 where runoff (Q_5 = 0 cfs, Q_{100} = 2 cfs) from Basin OS-3's 1.11 acres of undeveloped prairie flows south onto Basin EXD's 15.87 acres (Q_5 = 5 cfs, Q_{100} = 31 cfs). The combined flow (Q_5 = 5 cfs, Q_{100} = 33 cfs) travels south and drains into the existing channel along the eastern boundary.

At Design Point EX10 a 36" CMP culvert (corresponds to DP10 in the MDDP) that drains from north to south under Eastonville Road (Basin OS-8) onto the undeveloped open space north (Basin OS-2) of the proposed Filing 2 layout. The Meridian Ranch MDDP states the runoff is Q_5 = 5 cfs, Q_{100} = 11 cfs.

Design Point EX5 consists of a swale that leave the site at the south east boundary. Runoff (Q_5 = 3 cfs, Q_{100} = 22 cfs) from Basin OS-2's 11.40 acres and Design Point EX10 is directed south onto Basin EXE. The runoff (Q_5 = 2 cfs, Q_{100} = 14 cfs) from Basin EXE's 5.83 acres is combined with Basin's OS-2 & Design Point EX10. The combined runoff (Q_5 = 10 cfs, Q_{100} = 44 cfs) of the 3 basins is directed offsite and into the existing channel in the Geick Ranch Basin.

At Design Point EX9 (Basin OS-9) is another 36" DONE culvert (corresponds to DP9 in the MDDP) that routes the runoff (Q_5 = 8 cfs, Q_{100} = 19 cfs) under Eastonville Road and onto the open space in Basin OS-1. The runoff (Q_5 = 13 cfs, Q_{100} = 85 cfs) from Basin OS-1's 45.02 acres is routed south via the existing channel located in the Geick Ranch Basin. An analysis found that this drainage channel is a jurisdictional waters of the U.S. with associated jurisdictional wetland habitat. Basin EXF's 1.62 acres is a small area consisting of open space prairies located at the north east corner of the site. Runoff Q_5 = 1 cfs, Q_{100} = 4 cfs) from Basin EXF is directed onto Basin OS-1 along the eastern boundary at Design Point EX6.

Design Point EX7 is a point in the channel that corresponds to the proposed Design Point 30. The combined flow of Basin OS-1, Design Points EX5, EX6, & EX9 at DP EX7 is Q_5 = 31 cfs, Q_{100} = 151 cfs).

Design Point EX7A is a point in the eastern channel that lines up with the beginning of the Waterbury Filing 1 & 2 development. The combined flow of Basin OS-1 & EX9 at DP EX7 is Q_5 = 21 cfs, Q_{100} = 104 cfs).

Design Point 13 in this report corresponds to Design Point 13 in Classic Consulting's previously approved "Final Drainage Report for Waterbury Filing 1" dated September 2016. Design Point 13 is an existing Stormwater Quality Pond 3 (SWQ Pond 3) that was an existing stock pond south of Stapleton Drive that has been converted to an EDB and treat 40.4 acres of 4-Way Ranch Filing No. 1 from their Basins OS-5, OS-6, D, E, N 40% of L, 50% of O, Q & basins I, J & N of Waterbury Filing No. 1. The EDB was designed using a 4' x 4' outlet set at 6907.50 with an orifice plate with 1 column of 8-1/8" diameter holes spaced 4" apart. The forebay top is set at 6915.00 with the bottom at 6914.75. The required volume was calculated to be 0.66 ac-ft and the design volume shown is 1.20 ac-ft. The release out of the pond was calculated to be Q_5 = 69 cfs, Q_{100} = 396 cfs (See Classic Consulting Drainage Map in Appendix). This online EDB is no longer considered a viable solution to treating for WQCV for Waterbury Filing 1 & 2 basins I, J & N.

EARLY GRADING PERMIT SUBBASIN DESCRIPTION

The developer/owner is applying for an Early Grading Permit with the PUD and Final Plat submittal. Per El Paso County Standards, the site must be analyzed for this step in the process. All the flow will be treated via temporary BMP's. These BMP's include silt fence for areas along the site boundary that cannot be routed to a Temporary Sediment Basin (TSB). The larger open areas being graded will be routed via natural and temporary diversion swales to a TSB. All the diversion swales are trapezoidal swales 2' deep, 2'-4' bottom width with 4:1 side slopes (see appendix for calcs) and will have Sediment Control Logs to help control sediment runoff. The velocities in these swales are less than the 7 fps and therefore will be stable. All TSBs will allow sediment to settle out and runoff will be routed via 6" PVC pipe wrapped in rock or in the bigger storm via the riprap armored weir. Below is a description of the site for the Initial Grading Phase.

Basin PRE-A's 4.61 acres consists of small open space prairie along the western boundary that cannot be routed to a Temporary Sediment Basin, and the existing channel floodplain. Runoff (Q_5 = 1 cfs, Q_{100} = 10 cfs) will sheet flow to Silt Fence BMPs prior to draining into the channel.

Design Point PRE1 is Temporary Sediment Basin 1 (TSB1) located at the southwestern corner of the site and will become a permanent Full Spectrum Detention Basin (FSD 1) when construction starts. Offsite Basin OS-4's 0.56 acres will sheet flow (Q_5 = 0 cfs, Q_{100} = 1 cfs) onto Basin PRE-B. Runoff (Q_5 = 4 cfs, Q_{100} = 24 cfs) from Basin PRE-B's 12.35 acres will combine with the upstream offsite Basin OS-4. The combined flow (Q_5 = 4 cfs, Q_{100} = 25 cfs) will be routed overland and via temporary diversion swale A-A to TSB where the water will be treated prior to leaving the site. The swale is a 2' wide bottom 2' deep swale with 4:1 side slopes. The 100-Y highwater depth in the swale is 1.00' (See Appendix for calcs).

Design Point PRE2 is Temporary Sediment Basin 2 (TSB2) located at the southeastern corner of the site. Runoff (Q_5 = 6 cfs, Q_{100} = 38 cfs) from Basin PRE-C's 19.08 acres will be routed overland and via 2 temporary diversion swales B-B to the TSB where the water will be treated prior to leaving the site. it is assumed that the flow is split between the 2 swales. The flows of Q_5 = 3 cfs, Q_{100} = 19 cfs are used in the swale calculations. The swales are a 2' wide bottom, 2' deep swale with 4:1 side slopes. The 100-Y highwater depth in the swale is 0.94' (See Appendix for calcs).

Design Point PRE3 is Temporary Sediment Basin 3 (TSB3) located on the eastern boundary of the site. Offsite Basin OS-3's 1.11 acres will sheet flow (Q_5 = 0 cfs, Q_{100} = 3 cfs) onto Basin PRE-D. Runoff (Q_5 = 5 cfs, Q_{100} = 30 cfs) from Basin PRE-D's 15.52 acres will combine with the upstream offsite Basin OS-3. The combined flow (Q_5 = 5 cfs, Q_{100} = 33 cfs) will be routed overland and via temporary Diversion Swale C-C that is located along the Boundary between Filing 1 & 2, to the TSB where the water will be treated prior to leaving the site. The swale is a 3' wide bottom, 2' deep swale with 4:1 side slopes. The 100-Y highwater depth in the swale is 1.04' (See Appendix for calcs).

Design Point PRE4 is Temporary Sediment Basin 4 (TSB4) located on the eastern boundary of the site just north of TSB3. Offsite Basin OS-1's 0.75 acres will sheet flow (Q_5 = 0 cfs, Q_{100} = 2 cfs) onto Basin PRE-E. Runoff (Q_5 = 2 cfs, Q_{100} = 16 cfs) from Basin PRE-E's 6.33 acres will combine with the upstream offsite Basin OS-1. The combined flow (Q_5 = 3 cfs, Q_{100} = 18 cfs) will be routed overland and via temporary Diversion Swale D-D to the TSB where the water will be treated prior to leaving the site. The swale is a 2' wide bottom 2' deep swale with 4:1 side slopes. The 100-Y highwater depth in the swale is 0.86' (See Appendix for calcs).

Design Point PRE5 is downstream of an existing stock pond located just north of Filing 2 boundary in a future Waterbury Phase. Offsite Basin OS-8's 2.56 acres flow (Q_5 = 5 cfs, Q_{100} = 11 cfs) under Eastonville Road via a 36" CMP culvert onto Basin OS-2. Offsite Basin OS-2's 11.15 acres flow (Q_5 = 8 cfs, Q_{100} = 19 cfs) into the existing stock pond. The combined flow (Q_5 = 9 cfs, Q_{100} = 35 cfs) of the 2 basins will be routed overland in a proposed Diversion Swale E-E north of the Filing 2 Boundary to the existing channel that runs along the eastern boundary, while keeping it off of the proposed development. The swale is a 4' wide bottom 2' deep swale with 4:1 side slopes. The 100-Y highwater depth in the swale is 0.99' (See Appendix for calcs).

Design Point PRE6 is a point located at the southern boundary of the site in Stapleton Drive. Basin PRE-F's 0.62 acres consists of small open space prairie that cannot be routed to a Temporary Sediment Basin. Runoff (Q_5 = 0 cfs, Q_{100} = 2 cfs) will sheet flow to Silt Fence BMPs prior to draining offsite in its historic path.

Design Point PRE7 is a point located at the eastern boundary of the site in the existing channel in the Geick Ranch Basin. Basin PRE-G's 2.00 acres consists of small open space prairie next to the channel and wetlands in Filing 1 that cannot be routed to a Temporary Sediment Basin. Runoff (Q_5 = 1 cfs, Q_{100} = 4 cfs) will sheet flow to Silt Fence BMPs prior to draining offsite in it' historic path. Basin PRE-H's 1.33 acres consists of small open space prairie next to the channel and wetlands in Filing 2 that cannot be routed to a Temporary Sediment Basin. Runoff (Q_5 = 1 cfs, Q_{100} = 4 cfs) will sheet flow to Silt Fence BMPs prior to draining offsite in its historic path. Along with these 2 Basins, runoff discharged from PRE2, PRE3, PRE4, & PRE5 for a combined runoff of Q_5 = 25 cfs, Q_{100} = 147 cfs that is routed to the existing channel.

PROPOSED MAJOR SUBBASIN DESCRIPTION (FOR MDDP)

The overall site will be developed in several Filings with each filing requiring its own final drainage report. The Proposed Major Basin Descriptions below is for Waterbury Filings 1 & 2 development and the preliminary layout of the future filings to the north tributary to the storm drain system and detention ponds in Filings 1 & 2. This future area is shown as fully developed to analyze the ultimate storm drain capacity and pond volumes. In the section below labeled Hydrologic Analysis for Filing 1 FDR the interim condition will be discussed and how runoff is captured and routed safely to the proposed private EDB for Filings 1 & 2 construction. See the Proposed MDDP Drainage Map in the appendix for a visual representation of the below Basin descriptions.

Design Point 1 is a proposed public 10' CDOT TYPE R sump inlet located in the west flowline of Saybrook drive just north of the roundabout. Basin A's 3.39 acres consists of roadway and single-family development. Runoff (Q_5 = 5 cfs, Q_{100} = 12 cfs) sheet flows into street sections and then is routed south via c&g where the inlet captures all the flow.

Design Point 2 is a proposed public 5' CDOT TYPE R sump inlet located in the west flowline of Saybrook drive opposite of DP 1. Basin C's 0.86 acres is comprised of roadway and single-family development. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) drains overland to the street and then to the inlet where it is fully captured. Pipe run 1 an 18" RCP routes the flow to a junction at DP 1. Pipe Run 2 a public 24" RCP routes the combined flow (Q_5 = 7 cfs, Q_{100} = 15 cfs) of DP 1 & 2 down Saybrook Road and then down Bayshore Drive over to manhole junction in Sandy Neck Way.

Design Point 3 is a proposed public 5' CDOT TYPE R sump inlet located in the east flowline of Sandy Neck Way. Basin B1's 2.30 acres consists of roadway and single-family development. Runoff (Q_5 = 4 cfs, Q_{100} = 8 cfs) is directed south to Design Point 3. The 5' CDOT TYPE R sump inlet captures the entire flow. Pipe run 3 an 18" public RCP storm sewer routes the flow west to a manhole junction with Pipe run 4.

Design Point 4 is a proposed public 10' CDOT TYPE R sump inlet located in the west flowline of Sandy Neck Way opposite of DP 3. Basin B2's 3.58 acres consists of roadway and single-family development. Runoff (Q_5 = 6 cfs, Q_{100} = 13 cfs) is routed to Design Point 4. The 10' CDOT TYPE R sump inlet captures the entire flow. Pipe run 4 a 24" public RCP storm sewer routes the flow west to a manhole junction with Pipe run 3. Pipe run 5 a 24" RCP routes the combined (Q_5 = 9 cfs, Q_{100} = 21 cfs) flow of Pipe runs 3 & 4 south down Sandy Neck Way to the manhole junction with Pipe run 2. Pipe run 6 a public 36" RCP then routes the combined (Q_5 = 16 cfs, Q_{100} = 35 cfs) flow of Pipe runs 2 & 5 south down Sandy Neck Way to a junction at Design Point 5.

Design Point 5 is a proposed public 10' CDOT TYPE R sump inlet located in the flowline of Sandy Neck Way cul-de-sac. Runoff (Q_5 = 4 cfs, Q_{100} = 9 cfs) from Basin F's 2.18 acres consisting of single-family development is directed to the east flow line of Sandy Neck Way and then south to the cul-de-sac bulb low point. Runoff (Q_5 = 3 cfs, Q_{100} = 6 cfs) from Basin H's 1.46 acres consisting of single-family development is directed to the west flow line of Sandy Neck Way and then south to the cul-de-sac bulb low point. The combined flow (Q_5 = 7 cfs, Q_{100} = 16 cfs) at DP 5 is captured in the 10' CDOT TYPE R sump inlet and then is routed to the pond along with the flow from Pipe Run 6 via a proposed 36" public RCP storm sewer (Pipe run 7, Q_5 = 22 cfs, Q_{100} = 48 cfs) to Design Point 8. If this inlet were blocked, runoff would overtop the curb and flow down the storm drain tract and into the proposed FSD Pond 1 (Design Point 8).

Design Point 6 is a proposed public 5' CDOT TYPE R sump inlet located in the west flowline of Saybrook Road. Runoff (Q_5 = 4 cfs, Q_{100} = 8 cfs) from Basin D's 2.11 acres consisting of single-family development is directed to the low point in Saybrook Road where the entire flow is captured. It is then routed via a proposed 18" public RCP storm sewer (Pipe run 8) to a manhole junction with

Pipe run 9.

Design Point 7 is a proposed public 5' CDOT TYPE R sump inlet located opposite of DP 6 in Saybrook Road. Runoff (Q_5 = 4 cfs, Q_{100} = 8 cfs) from Basin E's 2.18 acres consisting of roadway and single-family lots is directed via side lot line swales and C&G to the proposed inlet. The 5' inlet captures all of the flow and Pipe run 9 a public 18" diameter RCP storm sewer routes the flow to a manhole junction at with Pipe run 8. The combined flows (Q_5 = 7 cfs, Q_{100} = 15 cfs) of Pipe runs 8 & 9 are routed south down Saybrook Road in Pipe run 10 a public 24' diameter RCP to the proposed FSD Pond 1 Design (Design Point 8).

Design Point 7A is a proposed public 5' CDOT TYPE R at-grade inlet located in the east flowline of Saybrook Road at the south boundary. Runoff (Q_5 = 1 cfs, Q_{100} = 3 cfs) from Basin G1's 0.53 acres consisting of single-family development is directed to the at-grade inlet. The entire flow is captured. It is then routed via a proposed 15" public RCP storm sewer (Pipe run 10A) to a Design Point 7B.

Design Point 7B is a proposed public 5' CDOT TYPE R at-grade inlet located opposite of DP 7A in Saybrook Road. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) from Basin G2's 0.69 acres consisting of roadway and single-family lots is directed via side lot line swales and C&G to the proposed inlet. The 5' inlet captures all of the flow and Pipe run 10B a public 18" diameter RCP storm sewer routes the combined flows (Q_5 = 7 cfs, Q_{100} = 15 cfs) of Pipe runs 10A & Design Point 7B are routed west to the proposed FSD Pond 1 Design (Design Point 8).

Design Point 8 is a proposed private Full Spectrum Detention Basin called FSD Pond 1. Design Points 1-7B are routed to the pond and treated for Water Quality and Detention along with Basin K's 3.06 acres consisting mainly of the EDB area and rear yards. Runoff (Q_5 = 3 cfs, Q_{100} = 11 cfs) sheet flows into the EDB. The basins tributary to Design Point 8 are Basins A, B1, B2, C, D, E, F, G1, G2, H & K with a total area of 21.12 acres. The 100-year effective impervious area of 55.5% was calculated using UD-BMP Version 3.07 IRF spreadsheet. This information was entered into the UD-Detention_v4.03 spreadsheet and the calculation yielded a required a WQCV of 0.394 ac-ft, a EURV of 0.957 ac-ft and a 100-year total required volume of 2.127 ac-ft. The top of pond is set at 6930.00, with a bottom of pond at 6923.50. The pipes and swales to the pond discharge into 2 concrete forebays

(3% WQCV see calcs in appendix) with 18" high walls and a 3" notch to release minor flows into 2' wide concrete tickle channel. The trickle channel directs runoff to the proposed concrete micro-pool at the surcharge elevation of 6923.83. The bottom of the micro-pool is set at 6921.00 and the top set at 6923.50. A proposed 4' x 4' grate set at 6926.90 on top of a concrete outlet box, an outlet plate on the front to meet the 3-orifice requirement and an 18" outlet pipe with a restrictor plate set 12" above the invert will route all runoff from the pond. The metal plate will have 1 column containing 3 rows of 1-15/16" diameter orifice holes spaced 13.80" apart starting at 6923.50. The WQCV release is 0.20 cfs with a ponding elevation of 6925.29 and takes 40 hours to release. The EURV release is 0.5 cfs, with an elevation of 6926.94 and takes 73 hours to release. The 100-year detention release is 14.5 cfs, with an elevation of 6927.60 and takes 74 hours to release. A 30' long riprap emergency spillway set at 6928.00 will allow the 100-year developed peak in flow (Q_{100}= 60.0 cfs) with a depth of 0.73' (top of water = 6928.73) to be routed west into the natural channel. 1.00' freeboard is provided (see appendix for all pond calcs). The spillway and downhill slope will be armored with d50= VH 24" riprap. Pipe Run 10C a private 24" RCP will route the pond release into the existing natural channel. (See Pond Calculations in appendix).

Design Point 9 is an existing 36" RCP culvert under Eastonville Road where Offsite Basin OS-9 discharges onto offsite Basin OS-2. Runoff (Q_5 = 8 cfs, Q_{100} = 19 cfs) from Basin OS-9's 11.80 acres consists of historic flow based upon upstream detention. Further breakdown of this flow will be discussed with analysis of Design Point 29 and the discussion for Tributary flow to the FSD Pond 3.

Design Point 10 is an existing 36" RCP culvert under Eastonville Road south of the existing High School Pond where Offsite Basin OS-8 discharges onto a future Waterbury Filing. Runoff (Q_5 = 5 cfs, Q_{100} = 11 cfs) from Basin OS-10's 2.56 acres consists of historic flow based upon upstream detention. In the ultimate buildout this flow will be piped west to the existing natural channel along the westside of Waterbury and to Offsite Basin OS-5. Until the future filings are built this flow will follow its natural channel south to the existing channel located along the eastern boundary of Filings 1 & 2. This will be discussed again in the Preliminary Drainage Report section below.

Design Point 10A is where existing 3-42" RCP culverts from the temporary Meridian Ranch Pond cross under Eastonville Road per the "Preliminary/Final Drainage Report for Meridian Ranch Filing

No. 3" and shows flows of Q_5 = 28 cfs, Q_{100} = 153 cfs while the Meridian Ranch MDDP shows a 100-year flow of 185 cfs. The pipes discharge onto Offsite Basin OS-5. Offsite Basin OS-5's 5.64 acres consists of future Waterbury rear lots, open space and the natural channel. Runoff (Q_5 = 10 cfs, Q_{100} = 23 cfs) from OS-5 sheet flows to the channel. The flow is then routed south to Design Point 11.

Design Point 13 in this report corresponds to Design Point 13 in Classic Consulting's previously approved "Final Drainage Report for Waterbury Filing 1" dated September 2016. Design Point 13 is an existing Stormwater Quality Pond 3 (SWQ Pond 3) that was an existing stock pond south of Stapleton Drive that has been converted to an EDB and treat 40.4 acres of 4-Way Ranch Filing No. 1 from their Basins OS-5, OS-6, D, E, N 40% of L, 50% of O, Q & basins I, J & N of Waterbury Filing No. 1. The EDB was designed using a 4' x 4' outlet set at 6907.50 with an orifice plate with 1 column of 8-1/8" diameter holes spaced 4" apart. The forebay top is set at 6915.00 with the bottom at 6914.75. The required volume was calculated to be 0.66 ac-ft and the design volume shown is 1.20 ac-ft. The release out of the pond was calculated to be Q_5 = 69 cfs, Q_{100} = 396 cfs (See Classic Consulting Drainage Map in Appendix). This online EDB is no longer considered a viable solution to treating for WQCV for Waterbury Filing 1 & 2 basins I, J & N.

Design Point 11 is a proposed crossing under the proposed continuation of Gilbert Drive with dual 42" RCP culverts. Basin I's 4.97 acres consists of rear lots of 131-137, & 150-162 and the natural channel. Runoff (Q_5 = 4 cfs, Q_{100} = 14 cfs) sheet flows to the channel and is directed south to Design Points 11. As mentioned above Kiowas Engineering did a HEC-RAS analysis modeling developed flows along the channel. Tera Nova Engineering has done a new HEC-RAS analysis modeling developed flows. This information can be found under the Hydraulic analysis section below. The combined flow of Design Point 10A along with Basins OS-5 and I is Q_5 = 34 cfs, Q_{100} = 216 cfs. This flow is routed south under Gilbert drive and onto Basin J. Basin I's runoff as mentioned above was intended to be treated downstream in the existing EDB at Design Point 13. This online EDB is no longer considered a viable solution to treating for WQCV due to new regulations. Basin I's rear 20' of several lots consists of the rear setback where no structure can be built with this restriction the entire acreage consists of undeveloped pervious area. Therefore, this Basin is listed as excluded from Water Quality per the exclusion in ECM Appendix I.7.1.B.7 - Sites with Land Disturbance to

Undeveloped Land that will Remain Undeveloped.

Design Point 12 is a proposed 18" RCP culvert under Gilbert Drive that routes the runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) from offsite Basin OS-6's 1.06 acres that is comprised of the eastern half of Thatcher Court located in 4-Way Ranch Filing 1 to the existing natural channel.

Basin J's 1.44 acres is comprised of the 20' of rear lots of 156-162 and the existing channel along the west boundary. Runoff (Q_5 = 3 cfs, Q_{100} = 6 cfs) sheet flows into the channel and then is routed south to Design Point 13, an on-line existing stock pond that was converted to an EDB to provide water quality for part of 4-Way Ranch Filing No. 1 and Waterbury Basins I, J & N. As mentioned above this online EDB is no longer considered a viable solution to treating for WQCV. Basin I's rear 20' of several lots consists of the rear setback where no structure can be built with this restriction the entire acreage consists of undeveloped pervious area. Therefore, this Basin is listed as excluded from Water Quality per the exclusion in ECM Appendix I.7.1.B.7 - Sites with Land Disturbance to Undeveloped Land that will Remain Undeveloped .

Design Point 11A is a point at the south end of the property used to show the total flow in the west channel. The total runoff (Q_5 = 37 cfs, Q_{100} = 222 cfs) from Basin J's area and Design Point 11 is used in modeling analysis of the stream in Hydraulic section below.

Basin N's 0.22 acres is comprised of the proposed extension of Gilbert Road form 4-Way Ranch into Waterbury. Runoff (Q_5 = 1 cfs, Q_{100} = 1 cfs) sheet flows into the channel and then is routed south to Design Point 13, an on-line existing stock pond that is being converted to an EDB to provide water quality for part of 4-Way Ranch Filing No. 1 and Waterbury Basins I, J & N. Once again, this online EDB is no longer considered a viable solution to treating for WQCV. Therefore, the UD-BMP Version 3.07 Runoff Reduction was used to show that this area can be treated using Runoff Reduction. The results show that we have a 100% WQCV reduction for Basin N. A Drainage Easement will need to be placed over these areas on the Final Plat with the note *"No lots shall have any impervious improvements constructed within the rear setback (i.e. patios, hardscape, recreational facilities, etc.) for Lots 40-42, 156, & Tract C"*. The area will be vegetated with the final GEC plan. The Preliminary Plan/PUD also places impervious restrictions on this Basin area and the O and M manual also lists

how to maintain this space. This acreage of 0.35 is within the allowable limits.

In the previously approved "Final Drainage Report for Waterbury Filing No. 1" by Classic Consulting it was stated that there were 3 Stormwater Quality Ponds that needed to be provided for the adjacent 4-Way Ranch per conditions set forth by the Board of County Commissioners at approval of the Waterbury PUD Development Plan. Because there have been no changes to the tributary areas to these 3 Ponds and they have already been designed and constructed. The original approved calculations and results can be found in the appendix of the original report by Classic Consulting along with the Basin Exhibit Map.

Basin M1's 0.99 acres is comprised of the rear yards of lots 35-39 & open space tract along Stapleton Drive along. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) sheet flows over the 20' back yard setback and open space tract onto Stapleton Drive and then is routed east via curb & gutter to an existing storm drain system from here it is routed to the eastern channel located in the Geick Ranch Basin. Basin M1 contains the rear 20' of several lots which consists of the rear setback where no structure can be built. The entire acreage consists of undeveloped pervious area. Therefore, this Basin is listed as excluded from Water Quality per the exclusion in ECM Appendix I.7.1.B.7 - Sites with Land Disturbance to Undeveloped Land that will Remain Undeveloped.

Basin M2's 0.35 acres is comprised of the rear yards of lots 40-42 adjacent to undeveloped land east of the site. Runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) sheet flows from the back yard onto the undeveloped land. This rear lot area is not treated for water quality but is pervious area. The UD-BMP Version 3.07 Runoff Reduction was used to show that this area has 100% WQCV reduction based upon the Unconnected Impervious Area being routed over the Receiving Pervious Area. Only developed land in Basin M2 is the rear 40' which 20' of that consists of the rear setback where no structure can be built. A Drainage Easement will need to be placed over these areas on the Final Plat with the note *"No lots shall have any impervious improvements constructed within the rear setback (i.e. patios, hardscape, recreational facilities, etc.) for Lots 40-42, 156, & Tract C"*. The area will be vegetated with the final GEC plan. The Preliminary Plan/PUD also places impervious restrictions on this Basin area and the O and M manual also lists how to maintain this space. This acreage of 0.35 is within the allowable limits.

Basin P's 0.70 acres is comprised of open space Tract I adjacent to undeveloped land east of the site. Runoff (Q_5 = 0 cfs, Q_{100} = 2 cfs) sheet flows from the open space onto the undeveloped land. The entire acreage consists of undeveloped pervious area. Therefore, this Basin is listed as excluded from Water Quality per the exclusion in ECM Appendix I.7.1.B.7 - Sites with Land Disturbance to Undeveloped Land that will Remain Undeveloped.

Design Point 14 is a low point in the knuckle of Beech Creek Drive with a proposed public 10' CDOT TYPE R sump inlet. Runoff (Q_5 = 6 cfs, Q_{100} = 13 cfs) from Basin L1's 3.79 acres consisting of roadway and single-family lots is directed via side lot line swales and C&G to the proposed inlet. The 10' inlet captures all of the flow and Pipe run 11 a public 24" diameter RCP storm sewer routes the flow to a manhole junction with Pipe run 12.

Design Point 15 is a proposed public 5' CDOT TYPE R sump inlet opposite of DP 14 in Beech Creek Drive Runoff (Q_5 = 3 cfs, Q_{100} = 7 cfs) from Basin L2's 2.00 acres consisting of roadway and single-family lots is directed via side lot line swales and C&G to the proposed inlet. The 5' inlet captures all of the flow and Pipe run 12 a public 24" diameter RCP storm sewer routes the flow to a manhole junction with Pipe run 11. Pipe run 13 a 30" RCP routes the combined flow (Q_5 = 9 cfs, Q_{100} = 19 cfs) of Pipe Runs 11 & 12 north in Beech Creek Drive to a manhole junction with Pipe run 14.

Design Point 16 is a proposed public 10' CDOT TYPE R sump inlet located in the proposed western half of the private street of Beech Creek Drive. Runoff (Q_5 = 5 cfs, Q_{100} = 10 cfs) from Basin O1's 2.82 acres consisting of roadway and single-family lots is directed via side lot line swales and C&G to the proposed inlet. The 5' inlet captures all of the flow and Pipe run 14 a public 30" diameter RCP storm sewer routes the flow to a manhole junction with Pipe run 13. Pipe run 15 a 30" RCP routes the combined flow (Q_5 = 13 cfs, Q_{100} = 29 cfs) of Pipe Runs 13 & 14 west to a manhole junction with Pipe run 16.

Design Point 17 is a proposed public 5' CDOT TYPE R sump inlet located opposite of DP 16 in Beech Creek Drive. Runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) from Basin O2's 0.71 acres consisting of roadway, parking, roof and landscape area sheet flows to the east flowline of Beech Creek Drive and

to the proposed inlet. After all the flow is captured by the inlet Pipe run 16 routes the runoff to a junction with Pipe run 15. Pipe run 17 routes the combined flows (Q_5 = 15 cfs, Q_{100} = 34 cfs) of Pipe runs 15, 16, 39 & 40 and is routed west offsite via a private 36" diameter RCP to Design Point 18 a proposed private temporary EDB to be in place until future final design of a pond accommodates the new Waterbury development tributary to this pond. This is the FSD Pond 2.

Design Point 33 consists of 4-18" diameter area inlets located at the rear lot line in the downhill side yard swale. A 1' high berm along the back of Lots 46-49 in Basin O3's 0.45 acres will keep runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) from back yards and rear lot downspouts from sheet flowing into the existing wetlands untreated. Each area inlet can capture 1.40 cfs based upon a head of 0.25'. Therefore the 4 inlets can capture all of the flow. Pipe run 39 a 15" HDPE will route the captured flow to pipe run 17.

Design Point 34 consists of 3-18" diameter area inlets located at the rear lot line in the downhill side yard swale. A 1' high berm along the back of Lots 43-45 in Basin O4's 0.38 acres will keep runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) from back yards and rear lot downspouts from sheet flowing into the existing wetlands untreated. Each area inlet can capture 1.40 cfs based upon a head of 0.25'. Therefore the 3 inlets can capture all of the flow. Pipe run 40 a 15" HDPE will route the captured flow to pipe run 17.

Design Point 18 is a proposed temporary private Full Spectrum Detention Basin called FSD Pond 2. This pond will be replaced and resized when future filings to the east are final designed. There are no set time frames at this time to when the final design of the permanent pond will happen. Design Points 14-17 are routed to the pond and treated for Water Quality and Detention along with the Basin OS-4's 10.90 acres consisting of the EDB area and undeveloped upstream tributary area. Runoff (Q_5 = 2 cfs, Q_{100} = 16 cfs) from Basin OS-4 sheet flows into the EDB. The basins tributary to Design Point 18 are L1, L2, O1, O2 and OS-4 with a total area of 20.54 acres. The 100-year effective impervious area of 27.2% was calculated using UD-BMP Version 3.07 IRF spreadsheet. This information was entered into the UD-Detention_v4.03 spreadsheet and the calculation yielded a required a WQCV of 0.241 ac-ft, a EURV of 0.278 ac-ft and a 100-year detention total required volume of 1.027 ac-ft. The top of pond is set at 6906.00, with a bottom of pond at 6899.00. The pipes and swales to the pond discharge into a concrete forebay (3% WQCV see calcs in appendix) with 18" high walls and a 3" notch to release minor flows into 2' wide concrete tickle channel. The trickle

channel directs runoff to the proposed concrete micro-pool at the surcharge elevation of 6899.33. The bottom of the micro-pool is set at 6896.50 and the top set at 6899.00. A proposed 4' x 4' grate set at 6902.15 on top of a concrete outlet box, an outlet plate on the front to meet the 3-orifice requirement and an 18" outlet pipe with no restrictor plate will route all runoff from the pond. The metal plate will have 1 column containing 3 rows of 1-5/16" diameter orifice holes spaced 12.4" apart starting at 6899.00. The WQCV release is 0.10 cfs with a ponding elevation of 6901.21 and takes 40 hours to release. The EURV release is 0.2 cfs, with an elevation of 6902.09 and takes 59 hours to release. The 100-year detention release is 15.1 cfs, with an elevation of 6902.71 and takes 58 hours to release. A 20' long riprap emergency spillway set at 6904.00 will allow the 100-year developed peak in flow (Q_{100}= 29.30 cfs) with a depth of 0.59' (top of water = 6904.59) to be routed west into the natural channel. 1.00' freeboard is provided (see appendix). The spillway and downhill slope will be armored with d50= VH 24" riprap. Pipe Run 17A a private 18" RCP will route the pond release into the existing natural channel. (See Pond Calculations in appendix). When future filings are developed this temporary Pond 2 will be replaced with a permanent Pond as shown in the "Conceptual Drainage Report for Waterbury PUD Plan" prepared by Classic Consulting and dated November 2012.

For Design Points 19-25 this MDDP assumes the offsite basins upstream are fully developed with future Waterbury Filings.

Design Point 19 is a proposed 10' CDOT TYPE R sump inlet located in the south curb of Muddy Pond Street. Runoff (Q_5 = 8 cfs, Q_{100} = 16 cfs) from Basin OS-Q1's 4.31 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin Q1. Runoff (Q_5 = 3 cfs, Q_{100} = 6 cfs) from Basin Q1's 1.46 acres is directed to the 10' inlet. The combined flow (Q_5 = 8 cfs, Q_{100} = 16 cfs) is fully captured in the inlet and Pipe run 18 a 24" RCP diameter storm routes the flows to a manhole junction with Pipe run 19.

Design Point 20 is a proposed 5' CDOT TYPE R sump inlet located opposite of DP 19. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) from Basin OS-Q2's 0.96 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin Q2. Runoff (Q_5 = 2 cfs, Q_{100} = 5 cfs) from Basin Q2's 1.10 acres is directed to the 5' inlet. The combined flow (Q_5 = 3 cfs, Q_{100} = 8 cfs) is fully captured in the inlet and Pipe run 19 an 18" RCP diameter storm routes the flows to a manhole

junction with Pipe run 18. Pipe Run 20 a 24" RCP storm routes the combined flow (Q_5 = 10 cfs, Q_{100} = 22 cfs) of Pipe runs 19 & 20 east down Muddy Pond Street to a manhole junction with Pipe run 21.

Design Point 21 is a proposed 10' CDOT TYPE R at-grade inlet located in the north curb of Muddy Pond Street just east of Masonboro Way intersection. Runoff (Q_5 = 11 cfs, Q_{100} = 24 cfs) from Basin OS-R's 6.05 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin R. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) from Basin R's 1.02 acres is directed to the 10' inlet. The combined flow (Q_5 = 12 cfs, Q_{100} = 28 cfs) is routed to the inlet at Design Point 21 and Q_5 = 8 cfs, Q_{100} = 14 cfs is captured by the at-grad inlet. The bypass flow (Q_5 = 4 cfs, Q_{100} = 14 cfs) at DP 21 travels in the north flow line of Muddy Pond Street to Design Point 22. Pipe run 21 an 18" RCP diameter storm routes the captured flow to a manhole junction with Pipe run 20. Pipe run 22 routes the combined flow (Q_5 = 18 cfs, Q_{100} = 36 cfs) of Pipe runs 20 & 21 east down Muddy Pond Street to a manhole junction with Pipe run 25. The bypass flow (Q_5 = 4 cfs, Q_{100} = 14 cfs) at DP 21 travels in the north flow line of Muddy Pond Street to Design Point 22.

Design Point 22 is a proposed 10' CDOT TYPE R sump inlet located in the west curb of Megansett Wat. Runoff (Q_5 = 8 cfs, Q_{100} = 18 cfs) from Basin OS-S1's 5.59 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin S1. Runoff (Q_5 = 3 cfs, Q_{100} = 7 cfs) from Basin S1's 1.55 acres is directed to the 10' inlet. The combined flow (Q_5 = 15 cfs, Q_{100} = 32 cfs) of Basins OS-S1, S1 & the bypass flow from DP 21 is routed to the low point.

Design Point 23 is a proposed 10' CDOT TYPE R sump inlet located opposite of DP 22. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin OS-S2's 0.17 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin S2. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin S2's 0.13 acres is directed to the 10' inlet. The combined flow at DP 23 is Q_5 = 1 cfs, Q_{100} = 1 cfs. It is presumed that the combined flow (Q_5 = 15 cfs, Q_{100} = 33 cfs) at DP 22 & 23 is evenly split between the 2-10' CDOT TYPE R sump inlets. Pipe run 23 a 24" RCP diameter storm routes the flow (Q_5 = 8 cfs, Q_{100} = 17cfs) from the inlet at DP 22 to a manhole junction with Pipe run 24. Pipe Run 24 a 24" RCP storm routes the flow (Q_5 = 8 cfs, Q_{100} = 17 cfs) to the manhole junction with Pipe run 23. Pipe Run 25 a 30" RCP routes the combined flow (Q_5 = 15 cfs, Q_{100} = 33 cfs) of Pipe runs 23 & 24 south to a manhole junction with Pipe run 22 in Muddy Pond Street. Pipe run 26 a 36" RCP

then routes the combined flow (Q_5 = 31 cfs, Q_{100} = 63 cfs) of Pipe runs 22 & 25 east in Muddy Pond to a manhole junction with Pipe runs 27 & 28.

Design Point 24 is a proposed 5' CDOT TYPE R sump inlet located in the south curb of Muddy Pond Street. Runoff (Q_5 = 3 cfs, Q_{100} = 6 cfs) from Basin T1's 1.42 acres consists of single-family development and will be directed via lot line swales and c&g to the 5' inlet. Pipe run 27 an 18" RCP diameter storm routes the fully captured flow from the inlet to a manhole junction with Pipe runs 26 & 28.

Design Point 25 is a proposed 5' CDOT TYPE R sump inlet located opposite of DP 24. Runoff (Q_5 = 1 cfs, Q_{100} = 3 cfs) from Basin OS-T2's 0.76 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin T2. Runoff (Q_5 = 2 cfs, Q_{100} = 5 cfs) from Basin T2's 1.23 acres is directed to the 5' inlet. The combined flow at DP 25 is Q_5 = 3 cfs, Q_{100} = 7 cfs. Pipe run 28 an 18" RCP diameter storm routes the fully captured flow from the inlet to a manhole junction with Pipe runs 26 & 27. Pipe run 29 a 36" RCP then routes the combined flow (Q_5 = 36 cfs, Q_{100} = 73 cfs) of Pipe runs 26, 27 & 28 east in Muddy Pond Street and then south down Fish Camp Circle to a manhole junction with Pipe run 30.

Design Point 26 is a proposed 10' CDOT TYPE R sump inlet located in the west curb of Fish Camp Circle near the Knuckle. Runoff (Q_5 = 7 cfs, Q_{100} = 16 cfs) from Basin U1's 4.38 acres consists of single-family development and will be directed via lot line swales and c&g to the 10' inlet. Pipe run 30 a 24" RCP diameter storm routes the fully captured flow from the inlet to a manhole junction with Pipe run 29. Pipe run 31 a 42" RCP transports the combined flow (Q_5 = 41 cfs, Q_{100} = 86 cfs) of Pipe runs 29 & 30.

Design Point 27 is a proposed 5' CDOT TYPE R sump inlet located opposite of DP 26. Runoff (Q_5 = 3 cfs, Q_{100} = 7 cfs) from Basin U2's 1.89 acres consists of future single-family development and will be directed via lot line swales to the 5' inlet. Pipe run 32 an 18" RCP diameter storm routes the fully captured flow from the inlet to a manhole junction with Pipe runs 31.

Design Point 28 are 2 proposed 10' CDOT TYPE R sump inlets located in the north and south curb

of Sunken Meadow Road. These inlets are offsite in a future phase and will be built within a proposed drainage easement. The offsite curb and gutter in this area will also need to be built along with some asphalt to direct runoff to the 10' inlet. Runoff (Q_5 = 8 cfs, Q_{100} = 18 cfs) from Basin W's 5.20 acres is assumed to be evenly split between the 2 inlets and fully captured by them. Pipe run 34 a 24" RCP routes the captured runoff (Q_5 = 4 cfs, Q_{100} = 9 cfs) from the south inlet to the north inlet. Pipe run 34A a 30" RCP routes the combined flow from Design Points 28 & 32, described below via Pipe run 34A a 30" RCP.

Design Point 31 consists of 3-18" diameter area inlets located at the rear lot line in the downhill side yard swale. A 1' high berm along the back of Lots 90-92 in Basin V's 0.54 acres will keep runoff (Q_5 = 1 cfs, Q_{100} = 3 cfs) from back yards and rear lot downspouts from sheet flowing into the existing wetlands untreated. Each area inlet can capture 1.40 cfs based upon a head of 0.25'. Therefore the 3 inlets can capture all of the flow. Pipe run 37 a 15" HDPE will route the captured flow to pipe run 33. Pipe run 33 a 42" RCP then routes the combined flow (Q_5 = 44 cfs, Q_{100} = 92 cfs) of Pipe runs 31, 32 & 37 east through a Drainage Tract to FSD Pond 3.

Design Point 32 consists of 2-18" diameter area inlets located at the rear lot line in the downhill side yard swale. A 1' high berm along the back of Lots 88-89 in Basin X's 0.43 acres will keep runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) from back yards and rear lot downspouts from sheet flowing into the existing wetlands untreated. Each area inlet can capture 1.40 cfs based upon a head of 0.25'. Therefore the 2 inlets can capture all of the flow. Pipe run 38 a 15" HDPE will route the fully captured flow to Design point 28. Pipe run 34 a 30" RCP will route the combined flow (Q_5 = 9 cfs, Q_{100} = 20 cfs) of Design Point 28 and Pipe run 32 to FSD Pond 3.

Basin Y's 0.35 acres is comprised of undeveloped open space Tracts adjacent to the existing natural channel along the east side of the site. Runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) from Basin Y sheet flows east into the channel. The entire acreage consists of undeveloped pervious area. Therefore, this Basin is listed as excluded from Water Quality per the exclusion in ECM Appendix I.7.1.B.7 - Sites with Land Disturbance to Undeveloped Land that will Remain Undeveloped and I.7.1.C.1.a – Less than 1 acres of developed roadway area.

The following Basins are for future Waterbury Filings to the north and east that will be tributary to FSD Pond 3. All the basin descriptions are the same, they are comprised of future single-family development and will be directed via lot line swales and c&g to future storm drain systems the future drain systems will be routed to FSD Pond 3. The exact routes and design have not been finalized at this time but will be with a future Final Drainage Report at the time of development. Below is the summary of the flow and acreage.

Basin OS-1: 11.81 acres, Runoff (Q_5 = 18 cfs, Q_{100} = 41 cfs)
Basin OS-2: 11.53 acres Runoff (Q_5 = 16 cfs, Q_{100} = 36 cfs)
Basin OS-3A: 0.79 acres Runoff (Q_5 = 1 cfs, Q_{100} = 3 cfs)
Basin OS-3B: 5.66 acres Runoff (Q_5 = 9 cfs, Q_{100} = 20 cfs)

As mentioned above Design Point 9 is an existing 36" CMP culvert under Eastonville Road where Offsite Basin OS-9 discharges onto Offsite Basin OS-2. Runoff (Q_5 = 8 cfs, Q_{100} = 19 cfs) from Basin OS-9's 11.80 acres consists of historic flow based upon upstream detention. Runoff will be directed through the future Waterbury filings and into FSD Pond 3.

Design Point 29 is a proposed private Full Spectrum Detention Basin called FSD Pond 3. Design Points 19-28 and Offsite Basins OS-1, OS-2, OS-3A, OS-3B, & OS-9 along with Basin OS-7's 2.82 acres consisting of the EDB area. Runoff (Q_5 = 1 cfs, Q_{100} = 9 cfs) sheet flows into the EDB with a total area of 82.02 acres routed to the pond and treated for Water Quality and Detention. The 100-year effective impervious area of 49.3% was calculated using UD-BMP Version 3.07 IRF spreadsheet. This information was entered into the UD-Detention_v4.03 spreadsheet and the calculation yielded a required a WQCV of 1.398 ac-ft, a EURV of 3.231 ac-ft and a 100-year total required detention volume of 7.398 ac-ft. The top of pond is set at 6930.00, with a bottom of pond at 6922.00. The pipes and swales to the pond discharge into a concrete forebay (3% WQCV see calcs in appendix) with 18" high walls and a 3" notch to release minor flows into 2' wide concrete tickle channel. The trickle channel directs runoff to the proposed concrete micro-pool at the surcharge elevation of 6922.33. The bottom of the micro-pool is set at 6919.50 and the top set at 6922.00. A proposed 10' x 4' grate set at 6926.84 on top of a concrete outlet box, an outlet plate on the front to meet the 3-orifice requirement and a 36" outlet pipe with a restrictor plate set 26.10" above the invert

will route all runoff from the pond. The metal plate will have 1 column containing 3 rows of 2.62" x 2.62" orifice holes spaced 19.4" apart starting at 6922.00. The WQCV release is 0.70 cfs with a ponding elevation of 6925.04 and takes 40 hours to release. The EURV release is 1.2 cfs, with an elevation of 6926.84 and takes 78 hours to release. The 100-year detention release is 58.0 cfs, with an elevation of 6927.93 and takes 79 hours to release. A 80' long riprap emergency spillway set at 6928.10 will allow the 100-year developed peak in flow (Q_{100}= 247.2 cfs) with a depth of 0.99' (top of water = 6928.98) to be routed west into the natural channel. 0.91' freeboard is provided (see appendix). The spillway and downhill slope will be armored with d50= VH 24" riprap. Pipe Run 35 a private 36" RCP will route the pond release into the existing natural channel. (See Pond Calculations in appendix).

Design Point 30 is a triple 36" RCP culvert crossing under Sunken Meadow Road. Offsite Basin OS-10's 3.41 acres consists of open space containing the natural channel. Runoff (Q_5 = 1 cfs, Q_{100} = 8 cfs) is directed south through the wetlands to the culverts. The combined flow (Q_5 = 2 cfs, Q_{100} = 9 cfs) at DP 30 does not warrant the triple 36" RCP culverts alone but in case of failure in the Pond 3 outlet runoff from the emergency spillway (Q_{100} = 204 cfs) will be safely routed through the triple 36" RCP culverts (See appendix).

HYDRAULIC ANALYSIS

MAJOR DRAINAGEWAYS

As mentioned above there are 2 major drainage ways on the east and west side of the site. In the previously approved "Final Drainage Report for Waterbury Filing 1" dated September 2016 prepared by Classic Consulting Engineering & Surveying the floodplain along the west side of the site was determined by Kiowa Engineering in a 2004 LOMR (04-08-0012) using a HEC-RAS analysis modeling developed flows along the channel from the 3-42" culverts under Eastonville Road south to the existing stock pond (Design Point 13) south of Stapleton Drive with proposed and existing improvements such as the proposed 42" dual culverts located at the Gilbert Road crossing and existing dual 4' x 8' box culverts at Stapleton Drive. Terra Nova engineering has done a new HEC-RAS study for the floodplain to establish base flood elevations (see appendix for HEC-RAS model). These channels will be contained in proposed Tracts dedicated to drainage that will allow the 4-Way Ranch Metro District to provide maintenance.

As part of the revised Preliminary Plan submittal for the site revisions an analysis of the eastern channel by ECO Systems found that this drainage channel is a jurisdictional water of the U.S. with associated jurisdictional wetland habitat. Therefore, to comply with Section 404 of the Clean Water Act, we must meet the 404(b)(1) project review criteria, which include impact avoidance and minimization. The option the client plan to take is to minimize Project-wide impacts to 0.5-acre or less such that the pre-approved Nationwide Permits (NWP) may be used. No channel grading or redesign is proposed for the channels; with the exception of the Sunken Meadow Crossing where 3-36" culverts are being placed and additional flow is routed into the channel further upstream (Design Point E-E on the PDR Map). The rest of the channel is to remain natural at this time until verified with final design review.

For the analysis of the channels the Manning's Roughness Coefficients were selected based upon investigation of the channels from site visits and the Natural features and Wetlands report for the site done by Ecosystems services. Both channels have a very substantial amount of vegetative cover containing cattails and Palustrine Emergent wetland vegetation (see attached exhibits & photos in appendix). Both channels show no sign of erosion but do have standing pools of water 1"to 6" deep in most areas along the reach.

The manning's n values were taken from Table 10-2 for a stream on a plain with sluggish reaches, weedy and deep pools.

The west channel has more significant vegetation (cattails and brush) along the southern reach (RS x-sections 0 to 1500) than the northern part (RS x-sections 1500 to 2600) where it has more grasses and no cattails. For the existing condition in the southern part of the channel a manning's n of 0.07 was used. While in the northern part a manning's n of 0.05 was used. In the proposed condition we used a manning's n value of 0.07 for the whole channel as we are proposing planting some cattails and other tall grasses in the northern part to help with critical RS x-sections that were shown with the results of the existing conditions.

The east channel has significant vegetation (cattails and brush) along the whole reach (RS x-sections

0 to 2600) and is denser than the west channel. Therefore, a manning's n value of 0.08 was used in the HEC-RAS model. This is the upper limit for Table 10-2 for a stream on a plain with sluggish reaches, weedy and deep pools.

For shear stress the Retardance Class ranges from Class A to Class C were used based upon the SCS Retardance Class of Vegetal Retardance Curve See Table 8.9 and eq. 8.32 in appendix the values for allowable sheer stress which based upon the index conversion the values are Class A: 10.0 lb/sq ft, Class B: 7.64 lb/sq ft and Class C 5.60 lb/sq ft.

A HEC-RAS analysis was done of the east channel using the existing topo and the proposed contours sampled from these AutoCAD files along with the developed 100-year flow of 120 cfs. This flow is the taken from the Preliminary Drainage report calculations shown below and is the biggest flow the channel will see once development starts. This happens after development of Filings 1 & 2 and before there is development upstream in the future phases where onsite storm will route most flows in storm drain to detention/water quality ponds and not in the existing channel. The flow in the future fully developed condition is only 9 cfs (Design Point 30 MDDP Calcs) from RS x-section 2010.09 to 1200. While from RS x-sections 1000 to 400, 67 cfs is the flow (Design Point 30A MDDP Calcs). These may change in the future based upon the final design upstream. The 100-Y-HWL and finished floor lot elevations shown on the HECRAS exhibit are based upon the 120 cfs. The output information shows that the channel velocities are in the range of 0.46 fps to 3.60 fps. This is below the suggested velocities of 5 fps from the DCM Manual Chapter 10 for 100-year event. The Froude # vary from 0.05 to 0.76. The shear stress varies from 0.01 to 2.59 lbs/q ft, which is well under the above-mentioned limits. As mentioned above this is an existing channel that is not being altered with the exception of the road crossing with the 3-36" culverts and the diversion of flows from Basin OS-2 to a point higher in the channel. This channel also contains wetlands that we should avoid disturbing as the HECRAS results show that the channel is stable as is, with no needed improvements. At RS x-section 1200 just upstream of the culvert crossing is shown as critical flow and but the velocity is 0.46 fps, the Froude number is 0.05 and the shear stress is 1.43 lbs/sq ft, all below the requirements. There is proposed Type M d50=12" riprap with a bury depth of 24" just downstream of the RS x-section 1200 as shown on the construction drawings and this will help to stabilize the channel. The only other on-site RS x-section shown to be critical is RS x-section 1600. This RS x-section has a

velocity of 2.59 fps, the Froude number is 0.58 and the shear stress is 0.03 lbs/sq ft. It is respectfully requested that no improvements be done in this area as all the results show the channel is in conformance with the maximum design values and this RS x-section is in the middle of the widest part of the existing wetlands and any proposed stabilization would be more detrimental than helpful. RS x-section 400 which is downstream of our site and on someone else's property is also critical. RS x-section 400 is the last station which is always critical due to no downstream RS x-section to properly run calculations in HECRAS analysis. The 4-Way Ranch Metro District will provide maintenance on the channel using access from the end of the Public ROW of Sunken Meadow Road and Muddy Pond Street and Megansett Way. There is a proposed Drainage-Maintenance Easement along the whole channel abutting Waterbury Filing 1 & 2 and to the proposed FSD Pond 2.

A HEC-RAS analysis was also done of the West channel for the proposed conditions using the existing topo and the proposed contours. The channel was sampled from these AutoCAD files to obtain the RS x-sections data for the HECRAS analysis. The developed 100-year flow of 216 cfs was used for RS x-section 2500 to the proposed 42" dual culvert RS x-section at 1042.5. From RS x-section 900 to 100, 222 cfs was entered into the program. These flows are the based upon the MDDP drainage calculations for Design Points 11 & 11A respectively. As mentioned above the northern part of the channel has a manning's n of 0.05 and the southern part a 0.07 in the current condition but we are using a manning's n value of 0.07 for the whole channel as we are proposing planting cattails and other tall grasses in the northern part to help improve the critical RS x-sections that were shown with the results of the existing conditions. In the proposed analysis of the west channel the HECRAS output shows that the channel velocities are in the range of 0.71 fps to 5.13 fps. This is below the suggested velocities of 7.00 fps from the DCM Manual Chapter 10 for 100-year event. The shear stress varies from 0.05 to 3.94 lbs/sq ft, which is under the above-mentioned limits for Class A, B & C Retardance. The Froude #'s vary from 0.10 to 1.02. There are 3 locations where the Froude # is above the 0.90 maximum. The first one is at the RS x-section 1420 just upstream of a proposed check structure. We are adding selective riprap bank stabilization from station 1500 to station 1350. The second and third RS x-sections are at 500 & 300. They both have a Froude # of 1.01. These 2 RS x-sections are also shown as Critical Water Surface locations therefore, we are adding selective riprap bank stabilization from station 550 to station 250. RS x-section 1200 just upstream of the culvert crossing is also shown as Critical Water Surface. The velocity at is 0.71 fps, the Froude # is 0.07 and the shear stress is 0.05

lbs/sq ft. This shows that the crossing is not detrimental to the channel. There are 6 critical water surface RS x-sections listed in the HECRAS table, RS x-sections 1900, 1420, 1200, 500, 300, & 0. The velocity at RS x-section 1900 is 2.94 fps, the Froude # is 0.61 and the shear stress is at 1.33 lbs/sq ft. The results are all below the allowable ranges and by armoring with selective riprap bank stabilization from station 1950 to station 1850 and planting cattails & other tall grasses we believe this will keep the channel stable. At the time of the Final Drainage Report and Construction Drawings a check structure with a more detailed analysis of this cross section will be looked at to help change this from a critical water surface. A check structure has been added at RS x-section 1400 to shallow out the channel slope downstream. This causes a Critical Water Surface at RS x-section 1420. RS x-section 1400 has a velocity of 4.54 fps, a Froude # of 1.02 and s shear stress of 3.36 lbs/sq ft. As mentioned above we are adding selective riprap bank stabilization from station 1500 to station 1350 in order to stabilize the channel. At RS x-section 1200 the velocity is 0.60 fps, the Froude # is 0.05 and the shear stress is 0.04 lbs/sq ft. This demonstrates that this RS x-section will be stable in the 100-Y event and no alternate stabilization is needed. As mentioned above RS x-sections are 500 & 300 are both at Critical Water Surface. It is proposed to armor with selective riprap bank stabilization from station 550 to station 250 and leave the bottom as is with the existing dense cattails and other tall grasses. RS x-section 0 is the last station which is always critical due to no downstream RS x-section to properly run calculations in HECRAS analysis. The 4-Way Ranch Metro District will provide maintenance on the channel using access from the Public ROW of the abutting Thatcher Court, Gilbert Drive and Stapleton Drive. The Hausemen Easement is also being used to gain access from Bandenero Drive

A HEC-RAS analysis was also done of the West channel for the existing conditions using the existing topo. This was analyzed so we could compare the existing 100-Y HWL to the proposed 100-Y HWL. The channel was sampled from these AutoCAD files using the same reach alignment and RS x-sections. The developed 100-year flow of 219 cfs was used for RS x-section 2600 to the proposed to RS x-section at 0. There was no rise above 0.50' (see table WEST CHANNEL EXISTING VS PROPOSED HWL in appendix for comparison) and therefore we met the requirement from the EL Paso County Floodplain Director *"that the cumulative effect of the proposed development, when combined with all other existing and anticipated development, will not increase the water surface elevation of the base flood more than one-half (1/2) foot at any point within the community."*

The 100-year high water elevations and limits for the east and west channels were checked against the adjacent proposed lots and the finished grade. All lot grades are set above the adjacent 100-year highwater elevation by 1 foot on the Preliminary Plan /PUD. The proposed lots in Waterbury Filing 1 & 2 along the east and west channel are all set out side of the FEMA Floodplain and the calculated 100-year high water elevations and limits. The existing Lots 35 & 36 of the adjacent subdivision 4-Way Ranch Filing No. 1 to the west are shown to have the current FEMA floodplain study from December of 2018 encroach onto them. In the HECRAS analysis of the existing conditions flows from this MDDP study the 100-Y HWL encroaches onto their property in the existing condition at RS-x-sections 600, 700, 800, & 900 (see EXISTING 100-Y FLOODPLAIN EXHIBIT in Appendix under HECRAS ANALYSIS). The encroachment of the 100-Y HWL occurs across the rear yards of the house. This encroachment is shown to be more than the current FEMA floodplain study form December of 2018. This is an existing condition and the Waterbury Development is not initiating this concern. In the proposed condition for this MDDP study the 100-Y HWL is pulled in closer to the channel at RS x-sections 800 & 900, but at RS x-sections 600 & 700 the 100-Y HWL still encroaches onto Lots 35 & 36 (see PROPOSED 100-Y FLOODPLAIN EXHIBIT in Appendix under HECRAS ANALYSIS). The HECRAS model show that the proposed condition limits the encroachment as compared to the existing condition analysis.

HYDROLOGIC ANALYSIS FOR FILING 1 & 2 PDR

PROPOSED BASIN DESCRIPTION (FOR PDR)

The development of the overall Waterbury site will occur in several platting phases. With the design of Waterbury Filings 1 & 2 the site will have an interim condition where the area to the north will be unplatted natural open space with drainage patterns differing from the future full build out analysis in the MDDP section until such time that it is developed. Below is a description of the Design Points and the overall proposed drainage characteristics for the development of only Waterbury Filing 1 & 2. Design Points 1-18 do not have any changes to them from the description above in the MDDP section therefore these basins will not be described below. The following is a description of the Design Points 19-30 altered by the interim state of undeveloped land upstream. In all cases the design flow is less than the ultimate build-out and therefore the inlets and pipes can capture and route the flow safely

Design Point 19 is a proposed 10' CDOT TYPE R sump inlet located in the south curb of Muddy Pond Street. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin OS-Q1's 0.33 acres consists of undeveloped land and will sheet flow onto Basin Q1. Runoff (Q_5 = 3 cfs, Q_{100} = 6 cfs) from Basin Q1's 1.48 acres is directed to the 8' inlet. The combined flow (Q_5 = 3 cfs, Q_{100} = 6 cfs) is captured in the inlet and Pipe run 18 a 24" RCP diameter storm routes the flows to a manhole junction with Pipe run 19.

Design Point 20 is a proposed 5' CDOT TYPE R sump inlet located opposite of DP 19. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin OS-Q2's 0.22 acres consists of undeveloped land and will sheet flow onto Basin Q2. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) from Basin Q2's 0.96 acres is directed to the 4' inlet. The combined flow (Q_5 = 2 cfs, Q_{100} = 5 cfs) is fully captured in the inlet and Pipe run 19 an 18" RCP diameter storm routes the flows to a manhole junction with Pipe run 18. Pipe Run 20 a 24" RCP storm routes the combined flow (Q_5 = 4 cfs, Q_{100} = 10 cfs) of Pipe runs 19 & 20 east down Muddy Pond Street to a manhole junction with Pipe run 21.

Design Point 21 is a proposed 10' CDOT TYPE R at-grade inlet located in the north curb of Muddy Pond Street just east of Masonboro Way intersection. Runoff (Q_5 = 0 cfs, Q_{100} = 2 cfs) from Basin OS-R's 1.04 acres consists of undeveloped land and will sheet flow onto Basin R. Runoff (Q_5 = 2 cfs, Q_{100} = 4 cfs) from Basin R's 1.02 acres is directed to the 10' inlet. The combined flow (Q_5 = 2 cfs, Q_{100} = 6 cfs) is routed to the inlet and the flow is fully captured. Pipe run 21 an 18" RCP diameter storm routes the captured flow to a manhole junction with Pipe run 20. Pipe run 22 routes the combined flow (Q_5 = 6 cfs, Q_{100} = 16 cfs) of Pipe runs 20 & 21 east down Muddy Pond Street to a manhole junction with Pipe run 25. The bypass flow (Q_5 = 0 cfs, Q_{100} = 1 cfs) at DP 21 travels in the north flow line of Muddy Pond Street to Design Point 22.

Design Point 22 is a proposed 10' CDOT TYPE R sump inlet located in the west curb of Megansett Way. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin OS-S1's 0.31 acres consists of undeveloped land and will sheet flow onto Basin S1. Runoff (Q_5 = 3 cfs, Q_{100} = 7 cfs) from Basin S1's 1.55 acres is directed to the 10' inlet. The combined flow (Q_5 = 3 cfs, Q_{100} = 7 cfs) of Basins OS-S1 & S1 is routed via Pipe run 23 to a junction with Pipe run 24.

Design Point 23 is a proposed 10' CDOT TYPE R sump inlet located opposite of DP 22. Runoff (Q_5 = 0 cfs, Q_{100} = 0 cfs) from Basin OS-S2's 0.13 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin S2. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin S2's 0.13 acres is directed to the 10' inlet. The combined flow at DP 23 is Q_5 = 0 cfs, Q_{100} = 1 cfs. Pipe run 24 a 24" RCP diameter storm routes the flow (Q_5 = 0 cfs, Q_{100} = 1 cfs) from the inlet at DP 22 to a manhole junction with Pipe run 23. Pipe Run 25 a 30" RCP routes the combined flow (Q_5 = 3 cfs, Q_{100} = 7 cfs) of Pipe runs 23 & 24 south to a manhole junction with Pipe run 22 in Muddy Pond Street. Pipe run 26 a 36" RCP then routes the combined flow (Q_5 = 9 cfs, Q_{100} = 23 cfs) of Pipe runs 22 & 25 east in Muddy Pond to a manhole junction with Pipe runs 27 & 28.

Design Point 24 is a proposed 5' CDOT TYPE R sump inlet located in the south curb of Muddy Pond Street. Runoff (Q_5 = 3 cfs, Q_{100} = 6 cfs) from Basin T1's 1.42 acres consists of single-family development and will be directed via lot line swales and c&g to the 5' inlet. Pipe run 27 an 18" RCP diameter storm routes the flow from the inlet to a manhole junction with Pipe runs 26 & 28.

Design Point 25 is a proposed 5' CDOT TYPE R sump inlet located opposite of DP 24. Runoff (Q_5 = 0 cfs, Q_{100} = 1 cfs) from Basin OS-T2's 0.30 acres consists of future single-family development and will be directed via lot line swales and c&g onto Basin T2. Runoff (Q_5 = 2 cfs, Q_{100} = 5 cfs) from Basin T2's 1.23 acres is directed to the 4' inlet. The combined flow at DP 25 is Q_5 = 2 cfs, Q_{100} = 5 cfs. Pipe run 28 an 18" RCP diameter storm routes the flow from the inlet to a manhole junction with Pipe runs 27 & 28. Pipe run 29 a 36" RCP then routes the combined flow (Q_5 = 13 cfs, Q_{100} = 34 cfs) of Pipe runs 26, 27 & 28 east in Muddy Pond Street and then south down Fish Camp Circle to a manhole junction with Pipe run 30.

Design Point 26 is a proposed 10' CDOT TYPE R sump inlet located in the west curb of Fish Camp Circle near the Knuckle. Runoff (Q_5 = 7 cfs, Q_{100} = 16 cfs) from Basin U1's 4.38 acres consists of single-family development and will be directed via lot line swales and c&g to the 10' inlet. Pipe run 30 a 24" RCP diameter storm routes the flow from the inlet to a manhole junction with Pipe run 29. Pipe run 31 a 42" RCP transports the combined flow (Q_5 = 20 cfs, Q_{100} = 48 cfs) of Pipe runs 29 & 30.

Design Point 27 is a proposed 5' CDOT TYPE R sump inlet located opposite of DP 26. Runoff (Q_5 = 3 cfs, Q_{100} = 7 cfs) from Basin U2's 1.89 acres consists of future single-family development and will be directed via lot line swales to the 6' inlet. Pipe run 32 an 18" RCP diameter storm routes the flow from the inlet to a manhole junction with Pipe runs 31. Pipe run 33 a 42" RCP then routes the combined flow (Q_5 = 24 cfs, Q_{100} = 57 cfs) of Pipe runs 31 & 32 east through a Drainage Tract to FSD Pond 3.

Design Point E-E is a proposed 4' wide swale, 2' deep with 4:1 side slopes. Offsite Basin OS-8's 2.56 acres flow (Q_5 = 5 cfs, Q_{100} = 11 cfs) under Eastonville Road via a 36" CMP culvert onto Basin OS-2. Offsite Basin OS-2's 12.02 undeveloped acres flow (Q_5 = 3 cfs, Q_{100} = 23 cfs) south into the existing stock pond. The combined flow (Q_5 = 8 cfs, Q_{100} = 33 cfs) of the 2 basins will be routed overland in a proposed Diversion Swale E-E north of the Filing 2 Boundary to the existing channel that runs along the eastern boundary, while keeping it from entering the proposed development. The swale is a 8' wide bottom 2' deep swale with 5:1 side slopes set in a proposed Drainage Easement. This followed the guideline set forth in MHFD chapter 8 design criteria for stabilized swales. The 100-Y highwater depth in the swale is 0.72' (See Appendix for calcs). This swale has velocities of 4.00 fps for a grassed water way. This is below the allowable 5 fps. It is recommended that the swale be Permanently Seeded and mulched once installed in the Initial Phase of grading to establish a dense grass bottom and side slopes. The swale will be maintained by the 4-Way Ranch Metro District based upon the recommendations in the Operations and Maintenance Manual. Access to maintain the swale can be made from the temporary turnarounds at the end of Megansett Way and Masonboro Way. The swale is located in a proposed Access and Drainage Easement (see Drainage Maps).

Design Point 30 is a triple 36" RCP culvert crossing under Sunken Meadow Road. Offsite Basin OS-9 discharges onto Offsite Basin OS-1. Runoff (Q_5 = 8 cfs, Q_{100} = 19 cfs) from Basin OS-9's 11.80 acres consists of historic flow based upon upstream detention. Offsite Basin OS-1's 41.09 acres consists of undeveloped land and open space containing the natural channel. Runoff (Q_5 = 11 cfs, Q_{100} = 73 cfs) from Basin OS-1 is directed south through the wetlands to the culverts. Basin Y's 0.35 acres is comprised of undeveloped open space Tracts adjacent to the existing natural channel along the east side of the site. Runoff (Q_5 = 1 cfs, Q_{100} = 2 cfs) from Basin Y sheet flows east into the channel. The entire acreage consists of undeveloped pervious area. Therefore, this Basin is listed as

excluded from Water Quality per the exclusion in ECM Appendix I.7.1.B.7 - Sites with Land Disturbance to Undeveloped Land that will Remain Undeveloped. Also entering the channel is the runoff from Diversion Swale E-E that routes Basin OS-2's flow mentioned above. The combined flow (Q_5 = 36 cfs, Q_{100} = 120 cfs) at DP 30 of Basins OS-1, OS-2, OS-8, OS-9, & Y will be safely routed through the triple 36" RCP culverts (See appendix).

The above Design point and Basin description shows that in the interim condition all runoff can be safely routed through the proposed storms drain system.

In an effort to protect receiving water and as part of the "four step process to minimize adverse impacts of urbanization" this site was analyzed in the following manner:

1. Reduce Runoff- The proposed impervious areas on the site are surrounded by landscaping and green space areas. Additionally, the new improvements and impervious areas on the site will be routed to a proposed private Extended Detention Basin. These items will reduce the volume of runoff using ponding and infiltration.
2. Stabilize Drainageways- There are 2 existing drainageways onsite. The westerly channel has been studied in HEC-RAS model and based upon calculations velocities are within the range for stabilized flow. The easterly channel has wetlands that allow the channel to stay stabilized.
3. Provide Water Quality Capture Volume (WQCV)- The 6 Extended Detention Basin have been sized and designed to sufficiently capture the required WQCV and slowly release it though the three-hole outlet, thereby allowing solids and contaminants to settle out.
4. Consider Need for Industrial and Commercial BMPs- The proposed development is single family site; therefore, no Industrial and Commercial BMPs have been proposed.

DRAINAGE FEES

This site lies within the Haegler Ranch Drainage Basin Diversion and Geick Ranch Basin. There is no approved Drainage Basin Planning study on file done with fees for Geick Ranch Basin. At the time of the Final Drainage Report Basin fee calculations will not need to be paid for the portion in the Haegler Ranch Basin diversion to Geick Ranch Basin.

SUMMARY

Site runoff and storm drain and appurtenances associated with the development of the Waterbury Filing No. 1 & 2 site will not adversely affect the surrounding and downstream developments. Runoff will be routed to the existing and proposed detention basins and reduce the runoff to be at or below historic rates mentioned above in the report via Full Spectrum Detention while slowly treating the water quality capture volume and in turn helping to stabilize the downstream channel banks. Terra Nova Engineering requests that this report satisfy the submittal requirements for the drainage analysis for Waterbury. This report and findings are in general conformance with all previously approved reports for this site.

PREPARED BY:
TERRA NOVA ENGINEERING, INC.

Quentin N. Armijo, P.E.
Vice President
Jobs/1717.00/drainage/1715.00 MMDP-FDR 1-2

BIBLIOGRAPHY

"City of Colorado Springs Drainage Criteria Manual Volume 1", approved May 2014 and prepared by City of Colorado Springs

"Drainage Criteria Manual County of El Paso, Colorado Volume 1" approved October 2018 and prepared by El Paso County

"Drainage Criteria Manual County of El Paso, Colorado Volume 2" approved October 2018 and prepared by El Paso County

"Drainage Criteria Manual County of El Paso, Colorado Volume 1 update Chapter 6" approved October 2018 and prepared by El Paso County

"El Paso County Stormwater Drainage Facilities Maintenance Policy" approved October 2018 and prepared by El Paso County

NRCS Soils Map for El Paso County

"Revision to the MDDP for Meridian Ranch, EL Paso County, Colorado", approved October 2005, and prepared by PBS&J

"Final Drainage Report for 4-Way Ranch Phase 1" approved March 2006 prepared by JR Engineering

The "Geick Ranch Drainage Basin Planning Study" approved February 2008, preprepared by Drexel Barrel & Co

"Preliminary/Final Drainage Report for Meridian Ranch filing No. 3" approved November 2011 prepared by Tech Contractors

"Master Development Drainage Plan, 4-Way Ranch – Phase 1" approved January 2012 prepared by Advanced Design Professionals, Inc.

"Preliminary Drainage Report for Waterbury (Phase 1 Preliminary Plan) approved June 2013 prepared by Classic Consulting

"Final Drainage Report for Waterbury Filing No. 1" approved September 2016 prepared by Classic Consulting

APPENDIX

VICINTY MAP

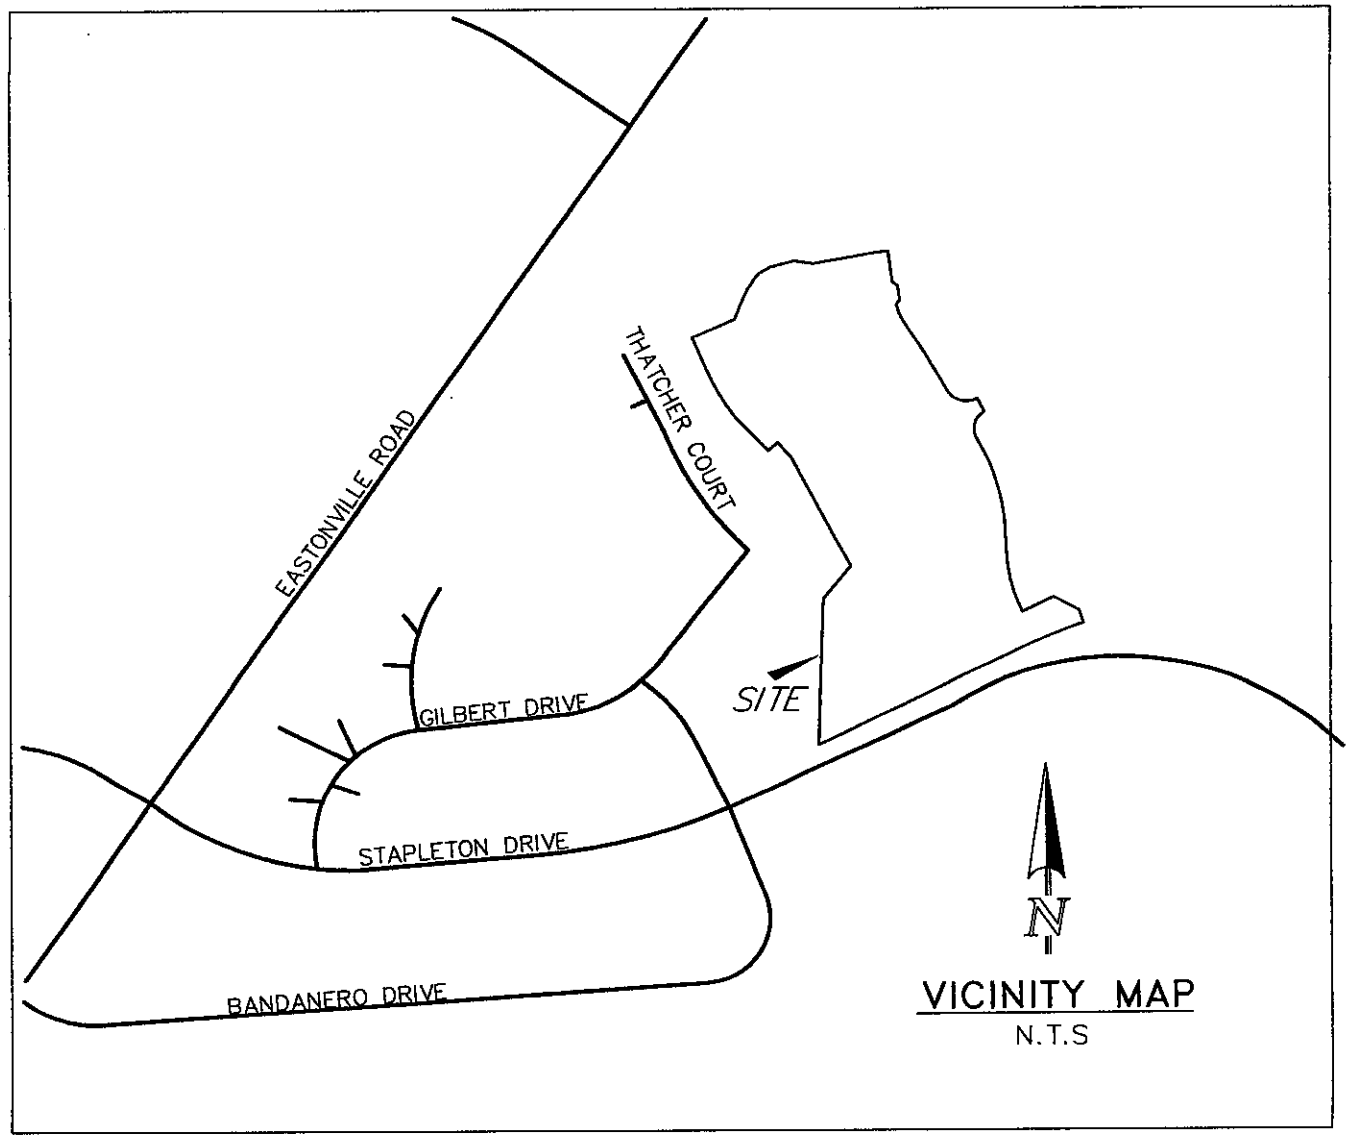

VICINITY MAP

N.T.S

NRCS SOILS MAP

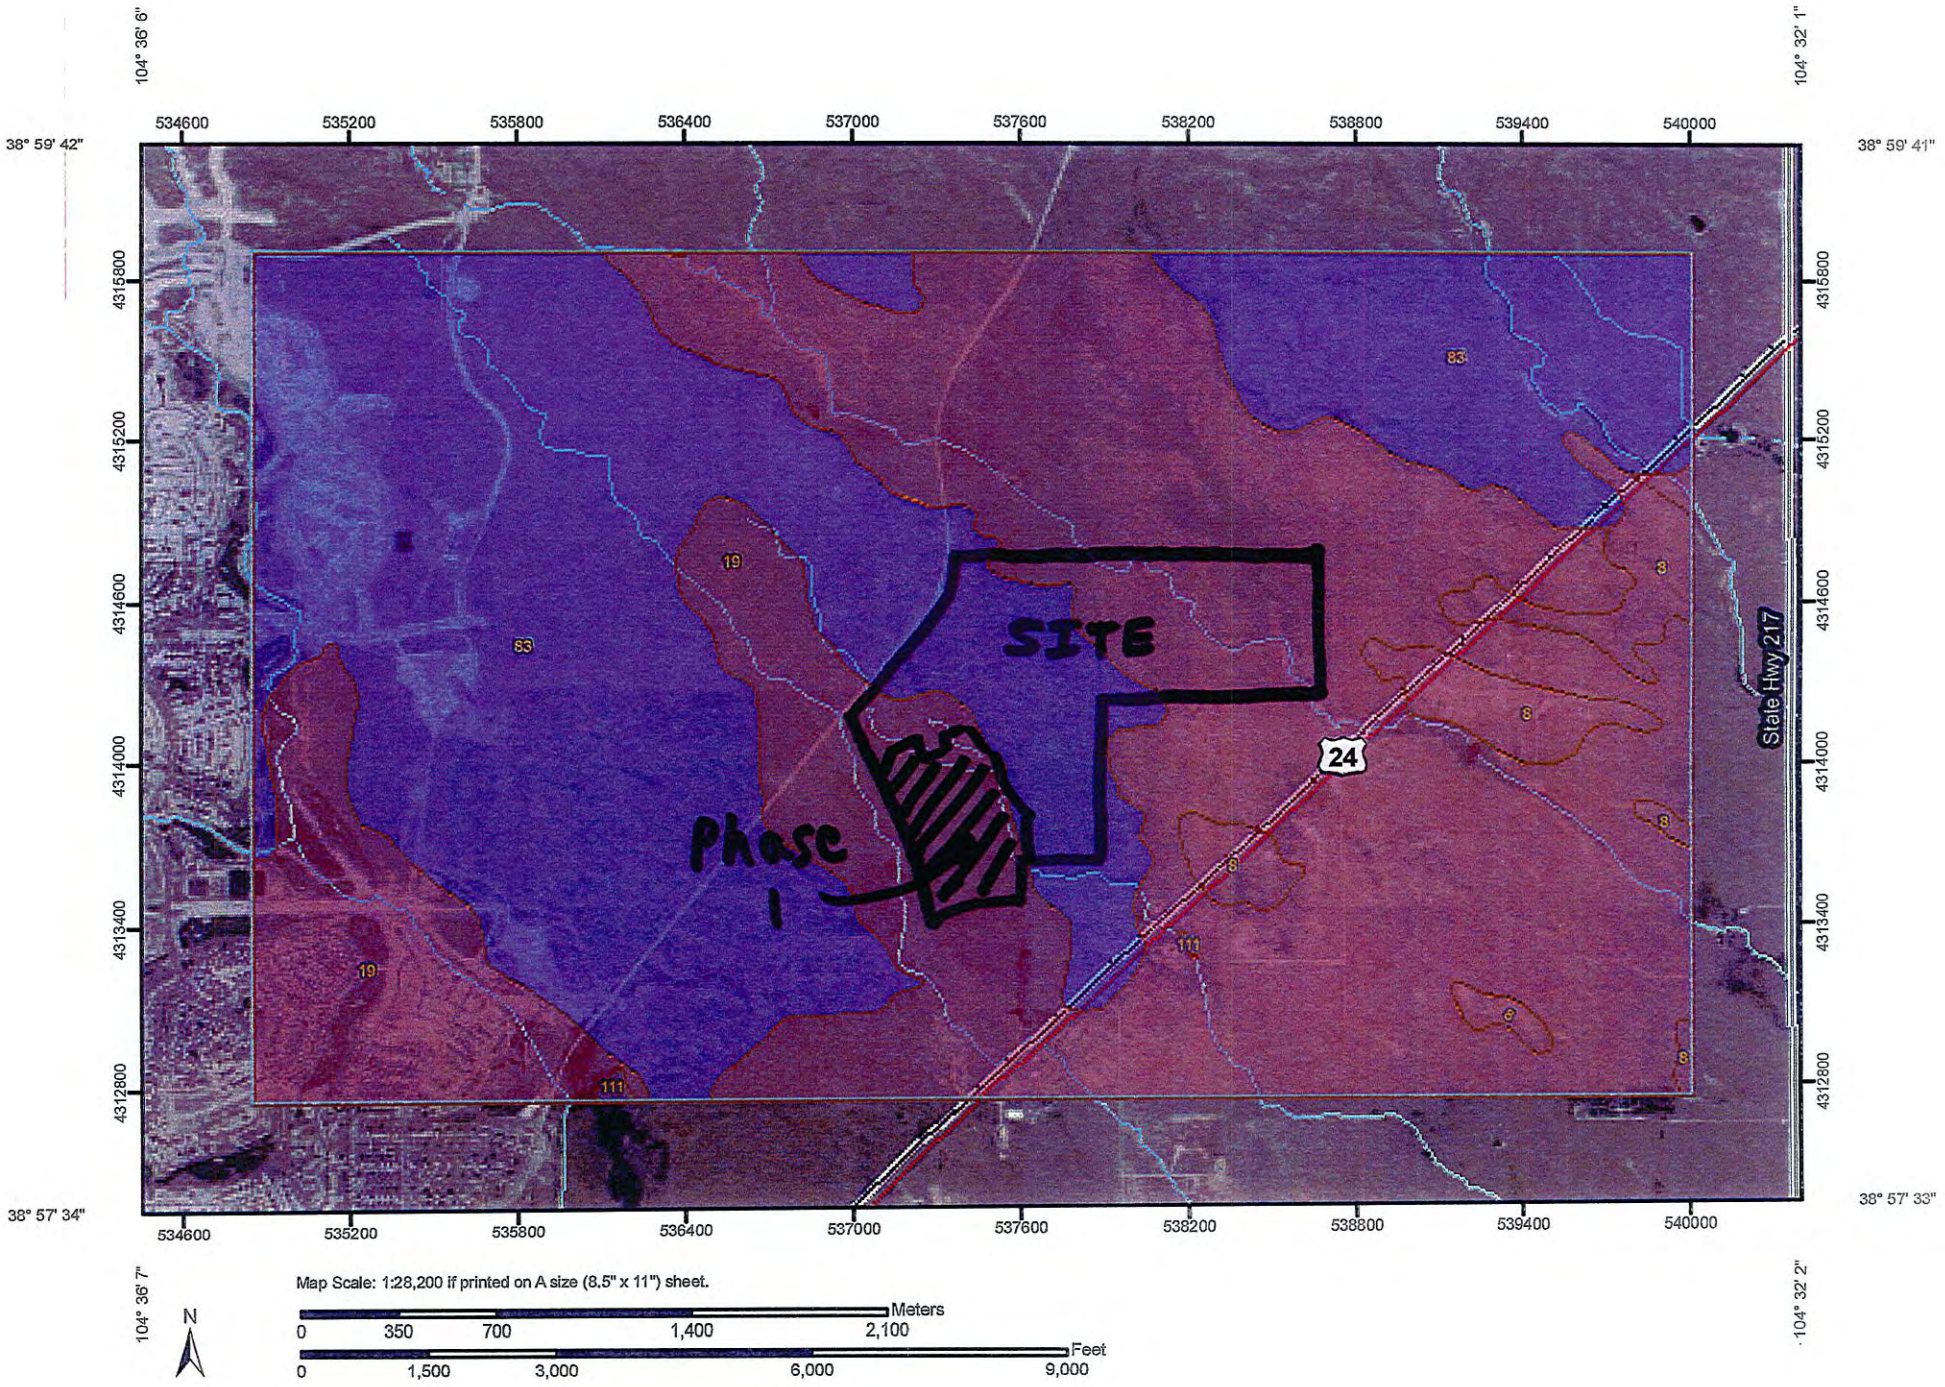
104° 36' 6"
104° 32' 1"
38° 59' 42"
38° 59' 41"
534600
535200
535800
536400
537000
537600
538200
538800
539400
540000
4315800
4315200
4314600
4314000
4313400
4312800
SITE
Phase 1
24
State Hwy 217
83
19
8
111
38° 57' 34"
38° 57' 33"
104° 36' 7"
104° 32' 2"
Map Scale: 1:28,200 if printed on A size (8.5" x 11") sheet.
N
Meters
0
350
700
1,400
2,100
Feet
0
1,500
3,000
6,000
9,000

MAP LEGEND

Area of Interest (AOI)

- Area of Interest (AOI)

Soils

- Soil Map Units

Soil Ratings

- A
- A/D
- B
- B/D
- C
- C/D
- D
- Not rated or not available

Political Features

- Cities

Water Features

- Streams and Canals

Transportation

- Rails
- Interstate Highways
- US Routes
- Major Roads
- Local Roads

MAP INFORMATION

Map Scale: 1:28,200 if printed on A size (8.5" × 11") sheet.

The soil surveys that comprise your AOI were mapped at 1:24,000.

Please rely on the bar scale on each map sheet for accurate map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL: http://websoilsurvey.nrcs.usda.gov
Coordinate System: UTM Zone 13N NAD83

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado
Survey Area Data: Version 8, Apr 6, 2011

Date(s) aerial images were photographed: 7/29/2005; 8/17/2005; 7/2/2005

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Hydrologic Soil Group

Hydrologic Soil Group— Summary by Map Unit — El Paso County Area, Colorado (CO625)				
Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
8	Blakeland loamy sand, 1 to 9 percent slopes	A	155.7	3.9%
19	Columbine gravelly sandy loam, 0 to 3 percent slopes	A	2,095.1	52.1%
83	Stapleton sandy loam, 3 to 8 percent slopes	B	1,768.2	44.0%
111	Water		3.8	0.1%
Totals for Area of Interest			4,022.9	100.0%

Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

FEMA FIRM MAP

National Flood Hazard Layer FIRMette

FEMA

104°34'31"W 38°58'31"N

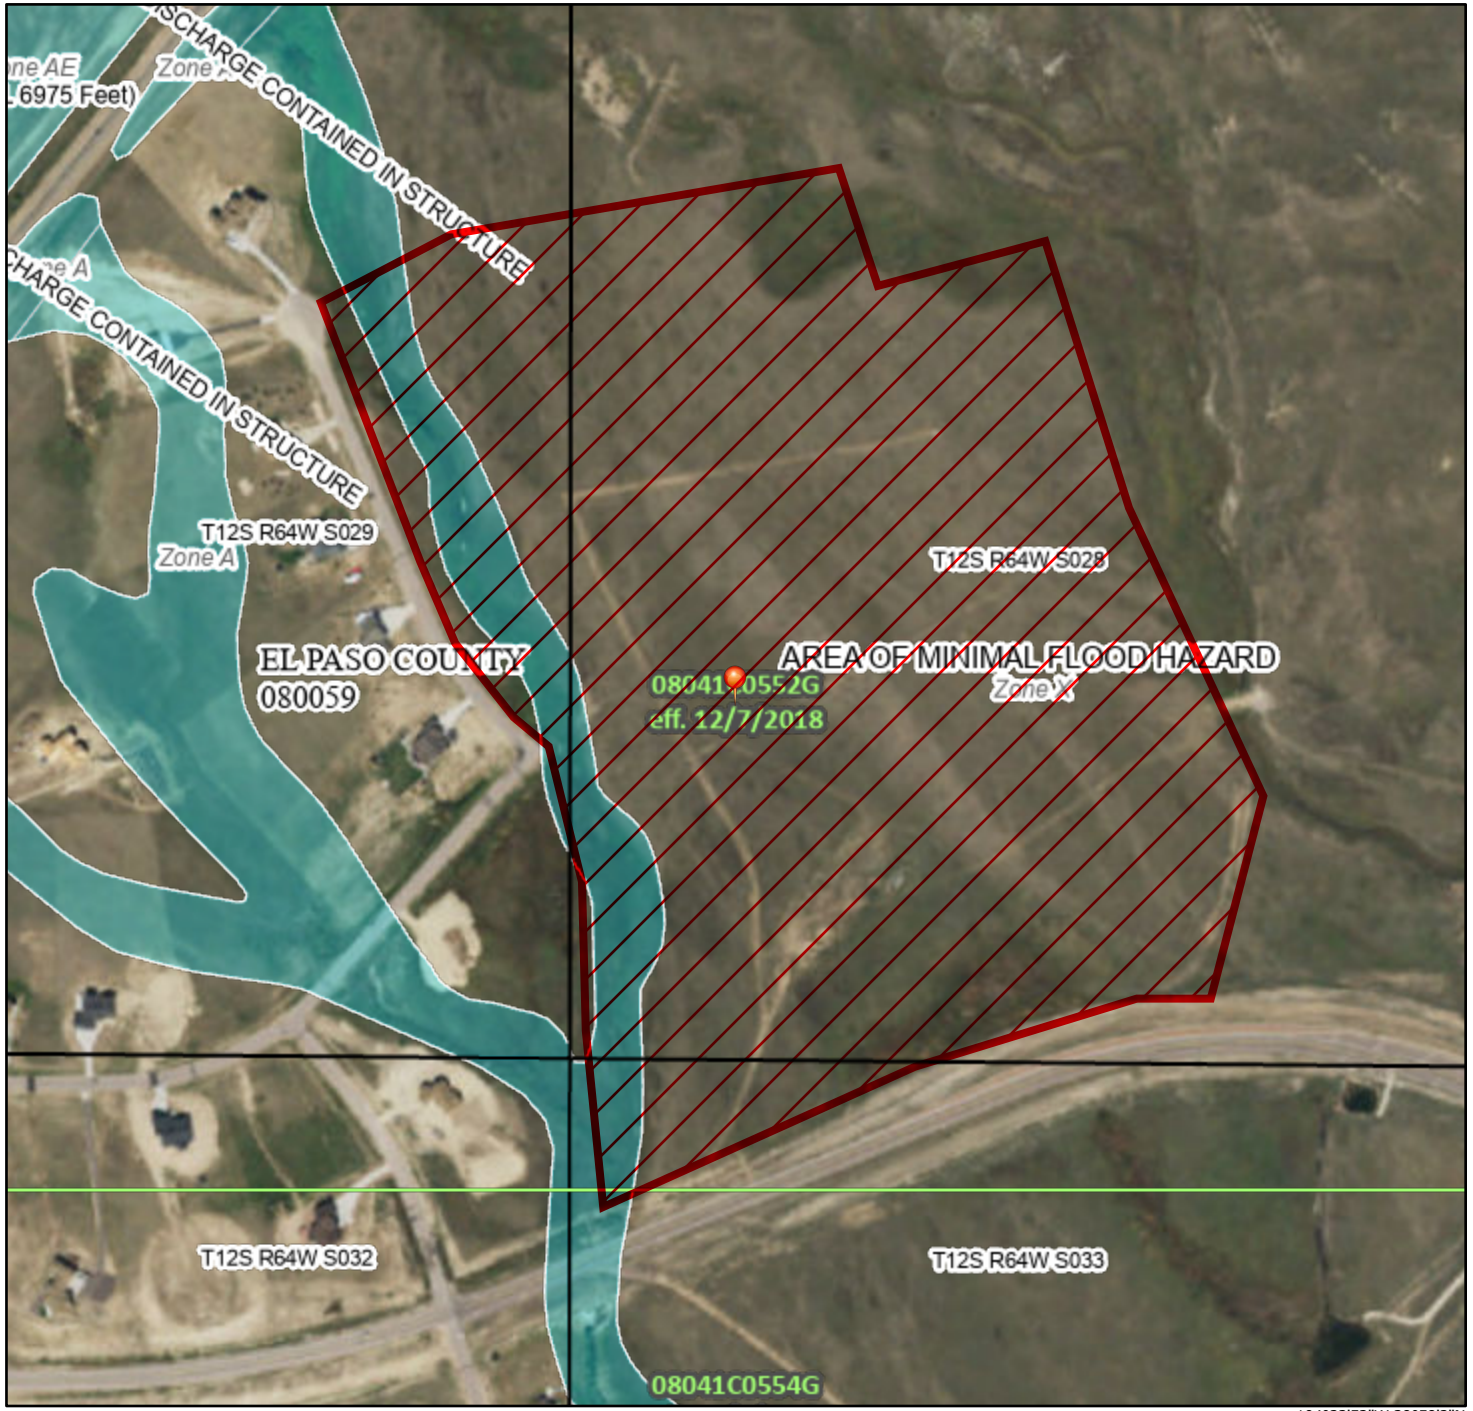

104°33'53"W 38°58'3"N

0 250 500 1,000 1,500 2,000 Feet

1:6,000

Basemap: USGS National Map: Orthoimagery: Data refreshed October, 2020

Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS
- Without Base Flood Elevation (BFE) *Zone A, V, A99*
- With BFE or Depth *Zone AE, AO, AH, VE, AR*
- Regulatory Floodway

OTHER AREAS OF FLOOD HAZARD
- 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile *Zone X*
- Future Conditions 1% Annual Chance Flood Hazard *Zone X*
- Area with Reduced Flood Risk due to Levee. See Notes. *Zone X*
- Area with Flood Risk due to Levee *Zone D*

OTHER AREAS
- NO SCREEN — Area of Minimal Flood Hazard *Zone X*
- Effective LOMRs
- Area of Undetermined Flood Hazard *Zone D*

GENERAL STRUCTURES
- Channel, Culvert, or Storm Sewer
- Levee, Dike, or Floodwall

OTHER FEATURES
- 20.2 / 17.5 — Cross Sections with 1% Annual Chance / Water Surface Elevation
- Coastal Transect
- Base Flood Elevation Line (BFE)
- Limit of Study
- Jurisdiction Boundary
- Coastal Transect Baseline
- Profile Baseline
- Hydrographic Feature

MAP PANELS
- Digital Data Available
- No Digital Data Available
- Unmapped

N

The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 8/27/2021 at 4:44 PM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

Federal Emergency Management Agency

Washington, D.C. 20472

FEB 19 2004

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

The Honorable Chuck Brown
Chairman, El Paso County
Board of Commissioners
27 East Vermijo Avenue
Colorado Springs, CO 80903-2208

IN REPLY REFER TO:
Case No.: 04-08-0012P
Community Name: El Paso County, CO
Community No.: 080059
Effective Date of This Revision: **MAR 19 2004**

Dear Mr. Brown:

The Flood Insurance Rate Map for your community has been revised by this Letter of Map Revision (LOMR). Please use the enclosed annotated map panel(s) revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals issued in your community.

Additional documents are enclosed which provide information regarding this LOMR. Please see the List of Enclosures below to determine which documents are included. Other attachments specific to this request may be included as referenced in the Determination Document. If you have any questions regarding floodplain management regulations for your community or the National Flood Insurance Program (NFIP) in general, please contact the Consultation Coordination Officer for your community. If you have any technical questions regarding this LOMR, please contact the Director, Federal Insurance and Mitigation Division of the Department of Homeland Security's Federal Emergency Management Agency (FEMA) in Denver, Colorado, at (303) 235-4830, or the FEMA Map Assistance Center toll free at 1-877-336-2627 (1-877-FEMA MAP). Additional information about the NFIP is available on our website at http://www.fema.gov/nfip.

Sincerely,

Kevin C. Long

Kevin C. Long, CFM, Project Engineer
Hazard Identification Section
Mitigation Division
Emergency Preparedness
and Response Directorate

For: Doug Bellomo, P.E., CFM, Acting Chief
Hazard Identification Section
Mitigation Division
Emergency Preparedness
and Response Directorate

List of Enclosures:
Letter of Map Revision Determination Document
Annotated Flood Insurance Rate Map

cc: Mr. Kevin Stilson, P.E., CFM
Floodplain Administrator
Pikes Peak Regional Building Department

Mr. Richard N. Wray, P.E.
Principal
Kiowa Engineering Corporation

 | Issue Date: FEB 19 2004 | Effective Date: MAR 19 2004 | Case No.: 04-08-0012P | LOMR-APP

Federal Emergency Management Agency

Washington, D.C. 20472

LETTER OF MAP REVISION DETERMINATION DOCUMENT

COMMUNITY AND REVISION INFORMATION		PROJECT DESCRIPTION	BASIS OF REQUEST
COMMUNITY	El Paso County Colorado (Unincorporated Areas)	NO PROJECT	HYDROLOGIC ANALYSIS HYDRAULIC ANALYSIS NEW TOPOGRAPHIC DATA
	COMMUNITY NO.: 080059		
IDENTIFIER	Fourway Ranch Letter of Map Revision	APPROXIMATE LATITUDE & LONGITUDE: 39.974, -104.566 SOURCE: USGS QUADRANGLE DATUM: NAD 83	
FLOODING SOURCE(S) & REVISED REACH(ES)	**Haegler Ranch Tributary 1** – from approximately 1,200 feet upstream of the Cadillac and Lake City Railroad to just upstream of Eastonville Road **Haegler Ranch Tributary 1A** – from the confluence with Haegler Ranch Tributary 1 to just upstream of Eastonville Road **Haegler Ranch Tributary 2** – from the confluence with Haegler Ranch Tributary 1 to just upstream of Eastonville Road **Gelck Ranch Tributary 1** – from approximately 600 feet upstream to approximately 4,000 feet upstream of the Cadillac and Lake City Railroad **Gelck Ranch Tributary 2** – from approximately 600 feet upstream to approximately 2,600 feet upstream of the Cadillac and Lake City Railroad		

SUMMARY OF REVISIONS

Effective Flooding: Zone A
Revised Flooding: Zone A
Increases: YES
Decreases: YES

* BFEs -- Base Flood Elevations

ANNOTATED MAPPING ENCLOSURES	ANNOTATED STUDY ENCLOSURES
TYPE: FIRM* NO.: 08041C0575 F Date: March 17, 1997	NO REVISION TO THE FLOOD INSURANCE STUDY REPORT

* FIRM – Flood Insurance Rate Map; ** FBFM – Flood Boundary and Floodway Map; *** FHBM – Flood Hazard Boundary Map

DETERMINATION

This document provides the determination from the Department of Homeland Security's Federal Emergency Management Agency (FEMA) regarding a request for a Letter of Map Revision (LOMR) for the area described above. Using the information submitted, we have determined that a revision to the flood hazards depicted in the Flood Insurance Study (FIS) report and/or National Flood Insurance Program (NFIP) map is warranted. This document revises the effective NFIP map, as indicated in the attached documentation. Please use the enclosed annotated map panels revised by this LOMR for floodplain management purposes and for all flood insurance policies and renewals in your community.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2677 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at http://www.fema.gov/nfip.

Doug Bellomo, P.E., CFM, Acting Chief
Hazard Identification Section
Mitigation Division
Emergency Preparedness and Response Directorate 102061 D.A04080012 102IC

Federal Emergency Management Agency
Washington, D.C. 20472

LETTER OF MAP REVISION
DETERMINATION DOCUMENT (CONTINUED)

COMMUNITY INFORMATION

APPLICABLE NFIP REGULATIONS/COMMUNITY OBLIGATION

We have made this determination pursuant to Section 206 of the Flood Disaster Protection Act of 1973 (P.L. 93-234) and in accordance with the National Flood Insurance Act of 1968, as amended (Title XIII of the Housing and Urban Development Act of 1968, P.L. 90-448), 42 U.S.C. 4001-4128, and 44 CFR Part 65. Pursuant to Section 1361 of the National Flood Insurance Act of 1968, as amended, communities participating in the NFIP are required to adopt and enforce floodplain management regulations that meet or exceed NFIP criteria. These criteria, including adoption of the FIS report and FIRM, and the modifications made by this LOMR, are the minimum requirements for continued NFIP participation and do not supersede more stringent State/Commonwealth or local requirements to which the regulations apply.

COMMUNITY REMINDERS

We based this determination on the 1-percent-annual-chance discharges computed in the submitted hydrologic model. Future development of projects upstream could cause increased discharges, which could cause increased flood hazards. A comprehensive restudy of your community's flood hazards would consider the cumulative effects of development on discharges and could, therefore, indicate that greater flood hazards exist in this area.

Your community must regulate all proposed floodplain development and ensure that permits required by Federal and/or State/Commonwealth law have been obtained. State/Commonwealth or community officials, based on knowledge of local conditions and in the interest of safety, may set higher standards for construction or may limit development in floodplain areas. If your State/Commonwealth or community has adopted more restrictive or comprehensive floodplain management criteria, those criteria take precedence over the minimum NFIP requirements.

We will not print and distribute this LOMR to primary users, such as local insurance agents or mortgage lenders; instead, the community will serve as a repository for the new data. We encourage you to disseminate the information in this LOMR by preparing a news release for publication in your community's newspaper that describes the revision and explains how your community will provide the data and help interpret the NFIP maps. In that way, interested persons, such as property owners, insurance agents, and mortgage lenders, can benefit from the information.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2677 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at http://www.fema.gov/nfip.

Doug Bellomo, P.E., CFM, Acting Chief
Hazard Identification Section
Mitigation Division
Emergency Preparedness and Response Directorate

Federal Emergency Management Agency
Washington, D.C. 20472

LETTER OF MAP REVISION
DETERMINATION DOCUMENT (CONTINUED)

COMMUNITY INFORMATION (CONTINUED)

We have designated a Consultation Coordination Officer (CCO) to assist your community. The CCO will be the primary liaison between your community and FEMA. For information regarding your CCO, please contact:

Mr. Steve L. Olsen
Director, Federal Insurance and Mitigation Division
Federal Emergency Management Agency, Region VIII
Denver Federal Center, Building 710
P.O. Box 25267
Denver, CO 80225-0267
(303) 235-4830

STATUS OF THE COMMUNITY NFIP MAPS

We will not physically revise and republish the FIRM and FIS report for your community to reflect the modifications made by this LOMR at this time. When changes to the previously cited FIRM panel and FIS report warrant physical revision and republication in the future, we will incorporate the modifications made by this LOMR at that time.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2677 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at http://www.fema.gov/nfip.

Doug Bellomo, P.E., CFM, Acting Chief
Hazard Identification Section
Mitigation Division
Emergency Preparedness and Response Directorate

Federal Emergency Management Agency
Washington, D.C. 20472

LETTER OF MAP REVISION
DETERMINATION DOCUMENT (CONTINUED)

PUBLIC NOTIFICATION OF REVISION

This revision will become effective 30 days from the date of this letter. Any requests to review or alter this determination should be made within 30 days and must be based on scientific or technical data.

This determination is based on the flood data presently available. The enclosed documents provide additional information regarding this determination. If you have any questions about this document, please contact the FEMA Map Assistance Center toll free at 1-877-336-2677 (1-877-FEMA MAP) or by letter addressed to the LOMR Depot, 3601 Eisenhower Avenue, Alexandria, VA 22304. Additional information about the NFIP is available on our website at http://www.fema.gov/nfip.

Doug Bellomo, P.E., CFM, Acting Chief
Hazard Identification Section
Mitigation Division
Emergency Preparedness and Response Directorate

HYDROLOGIC CALCULATIONS

EXISTING CONDITIONS

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

MDDP DRAINAGE REPORT ~ EXISTING BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		**WEIGHTED CA**	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	**CA(5)**	**CA(100)**
EXA	9.62	0.00	0.45	0.59	9.62	0.09	0.36	0.09	0.36	**0.87**	**3.46**
EXB	4.09	0.00	0.45	0.59	4.09	0.09	0.36	0.09	0.36	**0.37**	**1.47**
EXC	24.80	0.00	0.45	0.59	24.80	0.09	0.36	0.09	0.36	**2.23**	**8.93**
EXD	15.87	0.00	0.45	0.59	15.87	0.09	0.36	0.09	0.36	**1.43**	**5.71**
EXE	5.83	0.00	0.45	0.59	5.83	0.09	0.36	0.09	0.36	**0.52**	**2.10**
EXF	1.62	0.00	0.45	0.59	1.62	0.09	0.36	0.09	0.36	**0.15**	**0.58**
OS-1	45.02	0.00	0.45	0.59	45.02	0.09	0.36	0.09	0.36	**4.05**	**16.21**
OS-2	11.40	0.00	0.45	0.59	11.40	0.09	0.36	0.09	0.36	**1.03**	**4.11**
OS-3	1.11	0.00	0.45	0.59	1.11	0.09	0.36	0.09	0.36	**0.10**	**0.40**
OS-4	0.29	0.00	0.45	0.59	0.29	0.09	0.36	0.09	0.36	**0.03**	**0.11**
OS-5	6.74	0.00	0.45	0.59	6.74	0.09	0.36	0.09	0.36	**0.61**	**2.43**
OS-8	2.56	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-9	11.80	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-10A	12.80	FLOW TAKEN FROM MERIDAIN RANCH MDDP									

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALC'D BY: *QNA*

MDDP ~ EXISTING BASIN RUNOFF SUMMARY

BASIN	WEIGHTED CA(5)	WEIGHTED CA(100)	OVERLAND C(5)	OVERLAND Length (ft)	OVERLAND Height (ft)	OVERLAND Tc (min)	STREET / CHANNEL FLOW Length (ft)	STREET / CHANNEL FLOW Slope (%)	STREET / CHANNEL FLOW Velocity (fps)	STREET / CHANNEL FLOW Tc (min)	Tc TOTAL (min)	INTENSITY I(5) (in/hr)	INTENSITY I(100) (in/hr)	TOTAL FLOWS Q(5) (cfs)	TOTAL FLOWS Q(100) (cfs)
EXA	0.87	3.46	0.25	100	3	11.1	1193	1.7%	4.5	4.4	15.4	3.43	5.81	3	20
EXB	0.37	1.47	0.25	100	2	12.6	623	2.2%	5.2	2.0	14.6	3.51	5.96	1	9
EXC	2.23	8.93	0.25	100	2.5	11.7	2420	1.7%	4.6	8.9	20.6	3.01	5.01	7	45
EXD	1.43	5.71	0.25	100	2	12.6	1615	2.6%	5.6	4.8	17.4	3.25	5.47	5	31
EXE	0.52	2.10	0.25	100	8	8.0	1063	2.1%	5.0	3.5	11.5	3.86	6.66	2	14
EXF	0.15	0.58	0.25	100	6	8.8	400	2.5%	5.5	1.2	10.0	4.06	7.07	1	4
OS-1	4.05	16.21	0.25	100	6	8.8	3219	2.3%	5.3	10.1	18.9	3.13	5.24	13	85
OS-2	1.03	4.11	0.25	100	2	12.6	1203	1.0%	3.5	5.7	18.4	3.17	5.32	3	22
OS-3	0.10	0.40	0.25	100	2	12.6	330	2.6%	5.6	1.0	13.6	3.61	6.17	0	2
OS-4	0.03	0.11	0.25	100	2	12.6	230	2.6%	5.7	0.7	13.3	3.64	6.23	0	1
OS-5	0.61	2.43	0.25	80	5	7.8	1000	2.5%	5.5	3.0	10.8	3.96	6.85	2	17
OS-8	FLOW TAKEN FROM MERIDAIN RANCH MDDP													5	11
OS-9	FLOW TAKEN FROM MERIDAIN RANCH MDDP													8	19

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *11/22/22*
CALCULATED BY: *QNA*

MDDP ~ EXISTING SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		
						I(5)	I(100)	Q(5)	Q(100)	Facility Size
EX1	EXA, OS-5, & DP-EX10A	18.92	1.47	5.89	15.4	3.43	5.81	33	219	3-42" CULVERTS
EX2	EXB	4.09	0.37	1.47	14.6	3.51	5.96	1	9	STAPLETON ROAD
EX3	EXC & OS-4	25.10	2.26	9.03	20.6	3.01	5.01	7	45	EAST BOUNDARY
EX4	EXD & OS-3	16.98	1.53	6.11	17.4	3.25	5.47	5	33	EAST BOUNDARY
EX5	EXE, OS-2 & OS-8	17.23	1.55	6.20	18.4	3.17	5.32	10	44	EAST BOUNDARY
EX6	EXF	1.62	0.15	0.58	13.8	3.59	6.12	1	4	EAST BOUNDARY
EX7A	OS-1 & OS-9	56.82	4.05	16.21	18.9	3.13	5.24	21	104	POINT ALONG CHANNEL
EX7	EXE, EXF, OS-1, OS-2, OS-8 & OS-9	78.24	5.75	23.00	18.9	3.13	5.24	31	151	DP 30 PROP CONDITION
EX9	OS-9	11.80						8	19	EX 36" RCP Culvert
EX10	OS-8	2.56						5	11	EX 36" RCP Culvert
EX10A	MERIDIAN POND E RELEASE	Meridaian Ranch Filing 3 FDR Calculated Flows						28	185	EX 3-42" RCP Culverts
13	TOTAL OFFISITE EX. STOCK POND INFLOW	Per "Final Drainage Report for Waterbury Filing No. 1" dated September 2016, by Classic Consulting						69	396	EX STOCK POND

EARLY GRADING CONDITIONS

JOB NAME: ***WATERBURY MDDP***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALCULATED BY: ***QNA***

MDDP DRAINAGE REPORT ~ EARLY GRADING BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		**WEIGHTED CA**	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	**CA(5)**	**CA(100)**
PRE-A	4.61	0.00	0.45	0.59	4.61	0.09	0.36	0.09	0.36	**0.41**	**1.66**
PRE-B	12.35	0.00	0.45	0.59	12.35	0.09	0.36	0.09	0.36	**1.11**	**4.45**
PRE-C	19.08	0.00	0.45	0.59	19.08	0.09	0.36	0.09	0.36	**1.72**	**6.87**
PRE-D	15.52	0.00	0.45	0.59	15.52	0.09	0.36	0.09	0.36	**1.40**	**5.59**
PRE-E	6.33	0.00	0.45	0.59	6.33	0.09	0.36	0.09	0.36	**0.57**	**2.28**
PRE-F	0.62	0.00	0.45	0.59	0.62	0.09	0.36	0.09	0.36	**0.06**	**0.22**
PRE-G	2.00	0.00	0.45	0.59	2.00	0.09	0.36	0.09	0.36	**0.18**	**0.72**
PRE-H	1.33	0.00	0.45	0.59	1.33	0.09	0.36	0.09	0.36	**0.12**	**0.48**
OS-1	0.75	0.00	0.45	0.59	0.75	0.09	0.36	0.09	0.36	**0.07**	**0.27**
OS-2	11.15	0.00	0.45	0.59	11.15	0.09	0.36	0.09	0.36	**1.00**	**4.01**
OS-3	1.11	0.00	0.45	0.59	1.11	0.09	0.36	0.09	0.36	**0.10**	**0.40**
OS-4	0.56	0.00	0.45	0.59	0.56	0.09	0.36	0.09	0.36	**0.05**	**0.20**
OS-8	2.56	FLOW TAKEN FROM MERIDAIN RANCH MDDP									

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALC'D BY: *QNA*

MDDP ~ EARLY GRADING BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
PRE-A	0.41	1.66	0.25	100	2.5	11.7	909	1.4%	4.2	3.6	15.4	3.43	5.82	**1**	**10**
PRE-B	1.11	4.45	0.25	100	2.5	11.7	1612	1.3%	4.0	6.7	18.5	3.16	5.31	**4**	**24**
PRE-C	1.72	6.87	0.25	100	2.5	11.7	1308	1.3%	4.0	5.5	17.2	3.27	5.50	**6**	**38**
PRE-D	1.40	5.59	0.25	100	2	12.6	1297	1.6%	4.5	4.9	17.5	3.24	5.46	**5**	**30**
PRE-E	0.57	2.28	0.25	100	8	8.0	752	2.1%	5.1	2.5	10.5	4.00	6.94	**2**	**16**
PRE-F	0.06	0.22	0.25	64	2	8.7					8.7	4.26	7.47	**0**	**2**
PRE-G	0.18	0.72	0.25	161	5	13.9					13.9	3.58	6.12	**1**	**4**
PRE-H	0.12	0.48	0.25	67	2	9.1					9.1	4.21	7.36	**1**	**4**
OS-1	0.07	0.27	0.25	85	2	11.0	75	1.3%	4.0	0.3	11.4	3.88	6.70	**0**	**2**
OS-2	1.00	4.01	0.25	76	2	10.1	1427	2.1%	5.1	4.7	14.8	3.49	5.94	**4**	**24**
OS-3	0.10	0.40	0.25	100	9	7.7	329	2.5%	5.5	1.0	8.7	4.27	7.49	**0**	**3**
OS-4	0.05	0.20	0.25	100	2	12.6	127	2.4%	5.4	0.4	13.0	3.68	6.30	**0**	**1**
OS-8	FLOW TAKEN FROM MERIDAIN RANCH MDDP													**5**	**11**

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

MDDP ~ EARLY GRADING SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		
						I(5)	I(100)	Q(5)	Q(100)	Facility Size
PRE1	PRE-B & OS-4	4.65	1.16	4.65	18.5	3.16	5.31	4	25	TSB 1
PRE2	PRE-C	19.08	1.72	6.87	17.2	3.27	5.50	6	38	TSB 2
PRE3	PRE-D & OS-3	16.63	1.50	5.99	17.5	3.24	5.46	5	33	TSB 3
PRE4	PRE-E & OS-1	7.07	0.64	2.55	10.5	4.00	6.94	3	18	TSB 4
PRE5	OS-8 & OS-2	13.71	1.00	4.01	14.8	3.49	5.94	9	35	EASTERN CHANNEL
PRE6	PRE-F	0.62	0.06	0.22	8.7	4.26	7.47	0	2	STAPLETON ROAD
PRE7	PRE-G, PRE-H & DPS PRE2-PRE5	59.82	5.15	20.61	17.5	3.24	5.46	25	147	EX GEICK RANCH CHANNEL
10	OS-8	10.90						2	16	EX 36" RCP Culvert

MDDP CALCULATIONS

JOB NAME: ***WATERBURY MDDP***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALCULATED BY: ***QNA***

MDDP DRAINAGE REPORT ~ PROPOSED BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		**WEIGHTED CA**	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	**CA(5)**	**CA(100)**
A	3.39	3.39	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.52**	**2.00**
B1	2.30	2.30	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.03**	**1.36**
B2	3.58	3.58	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.61**	**2.11**
C	0.86	0.86	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.39**	**0.51**
D	2.11	2.11	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.95**	**1.24**
E	2.18	2.18	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.98**	**1.29**
F	2.18	2.18	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.98**	**1.29**
G1	0.53	0.53	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.24**	**0.31**
G2	0.69	0.69	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.31**	**0.41**
H	1.46	1.46	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.66**	**0.86**
I	4.97	1.45	0.45	0.59	3.53	0.09	0.36	0.19	0.43	**0.97**	**2.12**
J	1.44	1.44	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.65**	**0.85**
K	3.06	1.14	0.45	0.59	1.92	0.09	0.36	0.22	0.45	**0.69**	**1.37**
L1	3.79	3.79	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.71**	**2.24**
L2	2.00	2.00	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.90**	**1.18**
M1	0.99	0.99	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.44**	**0.58**
M2	0.35	0.35	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.16**	**0.21**
N	0.22	0.22	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.10**	**0.13**
O1	2.82	2.82	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.27**	**1.66**
O2	0.71	0.71	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.32**	**0.42**
O3	0.45	0.45	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.20**	**0.27**
O4	0.38	0.38	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.17**	**0.23**
P	0.70	0.00	0.45	0.59	0.70	0.09	0.36	0.09	0.36	**0.06**	**0.25**
Q1	1.48	1.48	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.66**	**0.87**
Q2	0.96	0.96	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.43**	**0.56**

JOB NAME: ***WATERBURY MDDP***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALCULATED BY: ***QNA***

MDDP DRAINAGE REPORT ~ PROPOSED BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		**WEIGHTED CA**	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	**CA(5)**	**CA(100)**
R	1.02	1.02	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.46**	**0.60**
S1	1.55	1.55	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.70**	**0.91**
S2	0.13	0.13	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.06**	**0.08**
T1	1.42	1.42	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.64**	**0.84**
T2	1.23	1.23	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.55**	**0.73**
U1	4.38	4.38	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.97**	**2.58**
U2	1.89	1.89	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.85**	**1.11**
V	0.54	0.54	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.24**	**0.32**
W	5.20	5.20	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**2.34**	**3.07**
X	0.43	0.43	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.19**	**0.25**
Y	0.35	0.35	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.16**	**0.21**
OS-1	11.81	11.81	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**5.31**	**6.97**
OS-2	11.53	11.53	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**5.19**	**6.80**
0S-3A	0.79	0.79	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.35**	**0.47**
0S-3B	5.66	5.66	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**2.55**	**3.34**
OS-4	10.90	0.00	0.45	0.59	10.90	0.09	0.36	0.09	0.36	**0.98**	**3.92**
OS-5	5.64	0.00	0.45	0.59	5.64	0.09	0.36	0.09	0.36	**0.51**	**2.03**
OS-6	1.06	1.06	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.48**	**0.63**
OS-7	2.82	0.00	0.45	0.59	2.82	0.09	0.36	0.09	0.36	**0.25**	**1.01**
OS-8	2.56	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-9	11.80	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-10	3.41	0.00	0.45	0.59	3.41	0.09	0.36	0.09	0.36	**0.31**	**1.23**
OS-Q1	4.31	4.31	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.94**	**2.54**
OS-Q2	0.94	0.94	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.42**	**0.55**
OS-R	6.05	6.05	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**2.72**	**3.57**
OS-S1	5.59	5.59	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**2.51**	**3.30**
OS-S2	0.17	0.17	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.08**	**0.10**
OS-T2	0.76	0.76	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.34**	**0.45**

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALC'D BY: *QNA*

MDDP ~ PROPOSED BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
A	1.52	2.00	0.25	100	2	12.6	420	1.5%	4.3	1.6	14.3	3.54	6.03	**5**	**12**
B1	1.03	1.36	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.2	3.55	6.05	**4**	**8**
B2	1.61	2.11	0.25	100	2	12.6	550	1.5%	4.3	2.1	14.8	3.49	5.93	**6**	**13**
C	0.39	0.51	0.25	20	0.5	5.3	500	2.0%	4.9	1.7	6.9	4.58	8.14	**2**	**4**
D	0.95	1.24	0.25	80	2	10.5	300	2.5%	5.5	0.9	11.4	3.87	6.69	**4**	**8**
E	0.98	1.29	0.25	100	2	12.6	400	2.5%	5.5	1.2	13.8	3.59	6.12	**4**	**8**
F	0.98	1.29	0.25	50	2	7.1	620	1.5%	4.3	2.4	9.5	4.14	7.22	**4**	**9**
G1	0.24	0.31	0.25								5.0	5.00	9.06	**1**	**3**
G2	0.31	0.41	0.25								5.0	5.00	9.06	**2**	**4**
H	0.66	0.86	0.25	50	2	7.1	525	1.5%	4.3	2.0	9.2	4.19	7.33	**3**	**6**
I	0.97	2.12	0.25	80	4	8.4	250	2.0%	4.9	0.8	9.2	4.18	7.32	**4**	**16**
J	0.65	0.85	0.25	90	6	8.1	850	2.0%	4.9	2.9	10.9	3.94	6.81	**3**	**6**
K	0.69	1.37	0.25	100	18	6.1	80	1.0%	3.5	0.4	6.5	4.67	8.33	**3**	**11**
L1	1.71	2.24	0.25	100	2	12.6	860	1.4%	4.1	3.5	16.1	3.36	5.69	**6**	**13**
L2	0.90	1.18	0.25	55	1.1	9.4	860	1.4%	4.1	3.5	12.8	3.70	6.34	**3**	**7**
M1	0.44	0.58	0.25	70	1.5	10.3	200	2.0%	4.9	0.7	11.0	3.92	6.79	**2**	**4**
M2	0.16	0.21	0.25	65	3	7.7	0	0.0%	0.0	0.0	7.7	4.43	7.83	**1**	**2**

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALC'D BY: *QNA*

MDDP ~ PROPOSED BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
N	0.10	0.13	0.25								5.0	5.00	9.06	1	1
O1	1.27	1.66	0.25	100	2.5	11.7	460	1.5%	4.3	1.8	13.5	3.62	6.19	5	10
O2	0.32	0.42	0.25	100	2	12.6	850	2.0%	4.9	2.9	15.5	3.42	5.80	1	2
O3	0.20	0.27	0.25								5.0	5.00	9.06	1	2
O4	0.17	0.23	0.25								5.0	5.00	9.06	1	2
P	0.06	0.25	0.25								5.0	5.00	9.06	0	2
Q1	0.66	0.87	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	3	6
Q2	0.43	0.56	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	2	4
R	0.46	0.60	0.25	100	4	10.1	700	2.0%	4.9	2.4	12.4	3.75	6.44	2	4
S1	0.70	0.91	0.25	100	6	8.8	175	2.0%	4.9	0.6	9.4	4.16	7.26	3	7
S2	0.06	0.08	0.25								5.0	5.00	9.06	0	1
T1	0.64	0.84	0.25	55	1.1	9.4	390	2.0%	4.9	1.3	10.7	3.97	6.88	3	6
T2	0.55	0.73	0.25	100	2	12.6	245	2.0%	5.0	0.8	13.5	3.63	6.20	2	5
U1	1.97	2.58	0.25	100	2	12.6	520	2.3%	5.3	1.6	14.3	3.54	6.03	7	16
U2	0.85	1.11	0.25	100	2	12.6	385	2.3%	5.4	1.2	13.8	3.59	6.12	3	7
V	0.24	0.32	0.25								5.0	5.00	9.06	1	3
W	2.34	3.07	0.25	100	2	12.6	630	1.6%	4.4	2.4	15.0	3.47	5.89	8	18
X	0.19	0.25	0.25								5.0	5.00	9.06	1	2
Y	0.16	0.21	0.25								5.0	5.00	9.06	1	2

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALC'D BY: *QNA*

MDDP ~ PROPOSED BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
OS-1	5.31	6.97	0.25	100	2	12.6	690	2.0%	5.0	2.3	15.0	3.47	5.90	**18**	**41**
OS-2	5.19	6.80	0.25	100	2	12.6	1700	1.8%	4.6	6.1	18.7	3.14	5.27	**16**	**36**
0S-3A	0.35	0.47	0.25	55	1.1	9.4	480	1.3%	3.9	2.0	11.4	3.87	6.68	**1**	**3**
0S-3B	2.55	3.34	0.25	100	2	12.6	480	1.3%	3.9	2.0	14.7	3.50	5.95	**9**	**20**
OS-4	0.98	3.92	0.25	800	26	30.5					30.5	2.46	4.01	**2**	**16**
OS-5	0.51	2.03	0.25	80	5	7.8					7.8	4.42	7.82	**2**	**16**
OS-6	0.48	0.63	0.25	30	0.6	6.9	900	1.8%	4.7	3.2	10.1	4.05	7.04	**2**	**4**
OS-7	0.25	1.01									5.0	5.00	9.06	**1**	**9**
OS-8	FLOW TAKEN FROM MERIDAIN RANCH MDDP													**5**	**11**
OS-9	FLOW TAKEN FROM MERIDAIN RANCH MDDP													**8**	**19**
OS-10	0.31	1.23	0.25	100	2	12.6	300	2.7%	5.7	0.9	13.5	3.62	6.19	**1**	**8**
OS-Q1	1.94	2.54	0.25	200	5	16.6	1500	1.5%	4.3	5.8	22.4	2.88	4.78	**6**	**12**
OS-Q2	0.42	0.55	0.25	50	1	8.9	900	1.5%	4.3	3.5	12.4	3.75	6.43	**2**	**4**
OS-R	2.72	3.57	0.25	50	1	8.9	850	2.7%	5.8	2.5	11.4	3.87	6.69	**11**	**24**
OS-S1	2.51	3.30	0.25	100	2	12.6	920	1.2%	3.8	4.0	16.7	3.32	5.60	**8**	**18**
OS-S2	0.08	0.10	0.25	100	2	12.6					12.6	3.72	6.39	**0**	**1**
OS-T2	0.34	0.45	0.25	100	2	12.6					12.6	3.72	6.39	**1**	**3**

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

MDDP ~ PROPOSED SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Facility Size
						I(5)	I(100)	Q(5)	Q(100)	
1	A	3.39	1.52	2.00	14.3	3.54	6.03	5	12	10' Type R Sump Inlet
2	C	0.86	0.39	0.51	6.9	4.58	8.14	2	4	5' Type R Sump Inlet
3	B1	2.30	1.03	1.36	14.2	3.55	6.05	4	8	5' Type R Sump Inlet
4	B2	3.58	1.61	2.11	14.8	3.49	5.93	6	13	10' Type R Sump Inlet
5	F & H	3.65	1.64	2.15	9.5	4.14	7.22	7	16	10' Type R Sump Inlet
6	D	2.11	0.95	1.24	11.4	3.87	6.69	4	8	5' Type R Sump Inlets
7	E	2.18	0.98	1.29	13.8	3.59	6.12	4	8	5' Type R Sump Inlets
7A	G1	0.53	0.24	0.31	5.0	5.00	9.06	1	3	5' Type R At-grade Inlet
7B	G2	0.69	0.31	0.41	5.0	5.00	9.06	2	4	5' Type R At-grade Inlet
8	DESIGN POINTS 1-7 & K	18.06	8.13	10.66	14.8	3.49	5.93	28	63	FSD Pond 1
9	OS-9	11.80						8	19	EX 36" RCP Culvert
10	OS-8	2.56						5	11	EX 36" RCP Culvert
10A	MERIDIAN POND E RELEASE	Meridaian Ranch Filing 3 FDR Calculated Flows						28	185	EX 3-42" RCP Culverts
11	OS-5, I, DP10A (MERIDIAN POND E RELEASE)	Sum of Basins						34	216	PR 2-42" RCP Culverts
11A	DP 11 & BASIN J	Sum of Basins						37	222	PR 2-42" RCP Culverts

JOB NAME:	*WATERBURY MDDP*
JOB NUMBER:	*1715.00*
DATE:	*07/20/22*
CALCULATED BY:	*QNA*

MDDP ~ PROPOSED SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Facility Size
						I(5)	I(100)	Q(5)	Q(100)	
12	OS-6	1.06	0.48	0.63	10.1	4.05	7.04	2	4	18"' RCP Culvert
13	TOTAL OFFISITE EX. STOCK POND INFLOW	Per "Final Drainage Report for Waterbury Filing No. 1" dated September 2016, by Classic Consulting						69	396	EX STOCK POND
14	L1	3.79	1.71	2.24	16.1	3.36	5.69	6	13	10' Type R Sump Inlet
15	L2	2.00	0.90	1.18	12.8	3.70	6.34	3	7	5' Type R Sump Inlet
16	O1	2.82	1.27	1.66	13.5	3.62	6.19	5	10	10' Type R Sump Inlet
17	O2	0.71	0.32	0.42	15.5	3.42	5.80	1	2	5' Type R Sump Inlet
18	DESIGN POINTS 14-17 & BASIN 0S-4	20.23	5.18	5.50	16.1	3.36	5.69	17	31	Interim FSD Pond 2
19	Q1 & OS-Q1	5.78	2.60	3.41	22.4	2.88	4.78	8	16	10' Type R Sump Inlet
20	Q2 & OS-Q2	1.89	0.85	1.12	12.4	3.75	6.43	3	7	5' Type R Sump Inlet
21	R & OS-R	7.06	3.18	4.17	11.4	3.87	6.69	12	28	10' Type R At-grade Inlet
22	S1 & OS-S1 & DP 21 FLOW BY	8.34	4.42	5.64	16.7	3.32	5.60	15	32	10' Type R Sump Inlet
23	S2 & OS-S2	0.31	0.14	0.18	12.6	3.72	6.39	1	1	10' Type R Sump Inlet
22 & 23 SPLIT	S1, OS-S1, S2, OS-S2, & DP 21 FLOW BY	8.65	4.56	5.82	16.7	3.32	5.60	8	16	2-10' Type R Sump Inlets
24	T1	1.42	0.64	0.84	10.7	3.97	6.88	3	6	5' Type R Sump Inlets
25	T2 & OS-T2	1.99	0.90	1.18	13.5	3.63	6.20	3	7	5' Type R Sump Inlets

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

MDDP ~ PROPOSED SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Facility Size
						I(5)	I(100)	Q(5)	Q(100)	
26	U1	4.38	1.97	2.58	14.3	3.54	6.03	7	16	10' Type R Sump Inlets
27	U2	1.89	0.85	1.11	13.8	3.59	6.12	3	7	5' Type R Sump Inlets
28	W	5.20	2.34	3.07	15.0	3.47	5.89	8	18	2-10' Type R Sump Inlets
29	DPS 19-28, 31-32, OFFSITE BASINS OS-1, 2, 3A, 3B, 7, & 9	82.44	36.10	47.71	22.4	2.88	4.78	112	247	FSD POND
30	Y & OS-10	3.76	0.46	1.43	13.5	3.62	6.19	2	9	Triple 36" RCP Culverts
30	FSD POND 3 EMERGCNEY SPILLWAY RELEASE	MHFD DETENTION 100Y PEAK INFLOW							247	Triple 36" RCP Culverts
30A	FSD POND RELEASE & DP 30	MHFD DETENTION 100Y PEAK INFLOW						3	67	EAST CHANNEL
31	V	0.54	0.24	0.32	5.0	5.00	9.06	1	3	18" DIA INLETS
32	X	0.43	0.19	0.25	5.0	5.00	9.06	1	2	18" DIA INLETS
33	O-3	0.45	0.20	0.27	5.0	5.00	9.06	1	2	18" DIA INLETS
34	O-4	0.38	0.17	0.23	5.0	5.00	9.06	1	2	18" DIA INLETS

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE.
REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

MDDP ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		
					I(5)	I(100)	Q(5)	Q(100)	Pipe Size*
1	DP 2	0.39	0.51	6.9	4.58	8.14	2	4	18" RCP
2	DP 1 & 2	1.91	2.51	14.3	3.54	6.03	7	15	24" RCP
3	DP 3	1.03	1.36	14.2	3.55	6.05	4	8	18" RCP
4	DP-4	1.61	2.11	14.8	3.49	5.93	6	13	18" RCP
5	DP 3 & 4	2.64	3.47	14.8	3.49	5.93	9	21	24" RCP
6	DP 1-4	4.56	5.97	14.8	3.49	5.93	16	35	36" RCP
7	DP-1-5	6.20	8.12	14.8	3.49	5.93	22	48	36" RCP
8	DP-6	0.95	1.24	11.4	3.87	6.69	4	8	18" RCP
9	DP-7	0.98	1.29	13.8	3.59	6.12	4	8	18" RCP
10	DP-6 & 7	1.97	2.58	13.8	3.59	6.12	7	16	24" RCP
10A	DP-7A	0.24	0.31	5.0	5.00	9.06	1	3	15" RCP
10B	DP-7A & 7B	0.55	0.72	5.0	5.00	9.06	3	7	18" RCP
10C	POND 1 RELEASE	2.95	3.87	13.8	3.59	6.12	0.4	14.5	18" RCP
11	DP-14	1.71	2.24	16.1	3.36	5.69	6	13	24" RCP
12	DP-15	0.90	1.18	12.8	3.70	6.34	3	7	18" RCP

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE.
REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

MDDP ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Pipe Size*
					I(5)	I(100)	Q(5)	Q(100)	
13	DP 14 & 15	2.61	3.42	16.1	3.36	5.69	9	19	30" RCP
14	DP 16	1.27	1.66	13.5	3.62	6.19	5	10	24" RCP
15	DP 14, 15 & 16	3.88	5.08	16.1	3.36	5.69	13	29	36" RCP
16	DP 17	0.32	0.42	15.5	3.42	5.80	1	2	18" RCP
17	DP 14, 15, 16, 17, 33, & 34	4.57	6.00	16.1	3.36	5.69	15	34	36" RCP
17A	POND 2 RELEASE						0.2	15.1	18" RCP
18	DP 19	2.60	3.41	22.4	2.88	4.78	8	16	24" RCP
19	DP 20	0.85	1.12	12.4	3.75	6.43	3	7	18" RCP
20	DP 18 & 19	3.46	4.53	22.4	2.88	4.78	10	22	24" RCP
21	DP 21 PICK UP						8	14	18" RCP
22	DP 19, 20 & 21	6.23	7.46	22.4	2.88	4.78	18	36	30" RCP
23	DP 22	2.28	2.91	16.7	3.32	5.60	8	16	24" RCP
24	DP 23	2.28	2.91	16.7	3.32	5.60	8	16	24" RCP
25	DP 22 & 23	4.56	5.82	16.7	3.32	5.60	15	33	30" RCP
26	DP 19 -23	10.79	13.28	22.4	2.88	4.78	31	63	36" RCP

JOB NAME: *WATERBURY MDDP*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE.
REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

MDDP ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Pipe Size*
					I(5)	I(100)	Q(5)	Q(100)	
27	DP 24	0.64	0.84	10.7	3.97	6.88	3	6	18" RCP
28	DP 25	0.90	1.18	13.5	3.63	6.20	3	7	18" RCP
29	DP 19-25	12.32	15.29	22.4	2.88	4.78	36	73	36" RCP
30	DP 26	1.97	2.58	14.3	3.54	6.03	7	16	24" RCP
31	DP 19-26	14.29	17.88	22.4	2.89	4.79	41	86	42" RCP
32	DP 27	0.85	1.11	13.8	3.59	6.12	3	7	18" RCP
33	DP 19-27, & 31	15.38	19.31	22.4	2.88	4.78	44	92	42" RCP
34	DP 28 SPLIT	1.17	1.53	15.0	3.47	5.89	4	9	24" RCP
34A	29 & 32	2.53	3.32	13.84	3.59	6.12	9	20	30" RCP
35	Pond 3 Release	MHFD UD-DETENTION POND RELEASE					1.2	58.0	36" RCP
36	DP 30	FSD POND 3 EMERGCNEY SPILLWAY RELEASE						247.2	TRIPLE 36" RCP
37	DP 31	0.24	0.32	5.00	5.00	9.06	1.2	3	15" HDPE
38	DP 32	0.19	0.25	5.00	5.00	9.06	1.2	2	15" HDPE
39	DP 33	0.20	0.27	5.00	5.00	9.06	1.2	2	15" HDPE
40	DP 34	0.17	0.23	5.00	5.00	9.06	1.2	2	15" HDPE

PDR CALCULATIONS

JOB NAME: ***WATERBURY FDR***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALCULATED BY: ***QNA***

PELIMNARY DRAINAGE REPORT ~ BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		**WEIGHTED CA**	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	**CA(5)**	**CA(100)**
A	3.39	3.39	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.52**	**2.00**
B1	2.30	2.30	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.03**	**1.36**
B2	3.58	3.58	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.61**	**2.11**
C	0.86	0.86	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.39**	**0.51**
D	2.11	2.11	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.95**	**1.24**
E	2.18	2.18	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.98**	**1.29**
F	2.18	2.18	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.98**	**1.29**
G1	0.53	0.53	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.24**	**0.31**
G2	0.69	0.69	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.31**	**0.41**
H	1.46	1.46	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.66**	**0.86**
I	4.97	1.45	0.45	0.59	3.53	0.09	0.36	0.19	0.43	**0.97**	**2.12**
J	1.44	1.44	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.65**	**0.85**
K	3.06	1.14	0.45	0.59	1.92	0.09	0.36	0.22	0.45	**0.69**	**1.37**
L1	3.79	3.79	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.71**	**2.24**
L2	2.00	2.00	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.90**	**1.18**
M1	0.99	0.99	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.44**	**0.58**
M2	0.35	0.35	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.16**	**0.21**
N	0.22	0.22	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.10**	**0.13**
O1	2.82	2.82	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.27**	**1.66**
O2	0.71	0.71	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.32**	**0.42**
O3	0.45	0.45	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.20**	**0.27**
O4	0.38	0.38	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.17**	**0.23**
P	0.70	0.00	0.45	0.59	0.70	0.09	0.36	0.09	0.36	**0.06**	**0.25**
Q1	1.48	1.48	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.66**	**0.87**
Q2	0.96	0.96	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.43**	**0.56**
R	1.02	1.02	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.46**	**0.60**
S1	1.55	1.55	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.70**	**0.91**
S2	0.13	0.13	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.06**	**0.08**
T1	1.42	1.42	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.64**	**0.84**

JOB NAME: ***WATERBURY FDR***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALCULATED BY: ***QNA***

PELIMNARY DRAINAGE REPORT ~ BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		**WEIGHTED CA**	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	**CA(5)**	**CA(100)**
T2	1.23	1.23	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.55**	**0.73**
U1	4.38	4.38	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**1.97**	**2.58**
U2	1.89	1.89	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.85**	**1.11**
V	0.54	0.54	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.24**	**0.32**
W	5.20	5.20	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**2.34**	**3.07**
X	0.43	0.43	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.19**	**0.25**
Y	0.35	0.35	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.16**	**0.21**
OS-1*	**41.09**	**0.00**	**0.45**	**0.59**	**41.09**	**0.09**	**0.36**	**0.09**	**0.36**	**3.70**	**14.79**
OS-2*	**12.02**	**0.00**	**0.45**	**0.59**	**12.02**	**0.09**	**0.36**	**0.09**	**0.36**	**1.08**	**4.33**
OS-4	10.90	0.00	0.45	0.59	10.90	0.09	0.36	0.09	0.36	**0.98**	**3.92**
OS-5	5.64	0.00	0.45	0.59	5.64	0.09	0.36	0.09	0.36	**0.51**	**2.03**
OS-6	1.06	1.06	0.45	0.59	0.00	0.09	0.36	0.45	0.59	**0.48**	**0.63**
OS-7*	2.82	0.00	0.45	0.59	2.82	0.09	0.36	0.09	0.36	0.25	1.01
OS-8	2.56	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-9	11.80	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-Q1*	**0.33**	**0.00**	**0.45**	**0.59**	**0.33**	**0.09**	**0.36**	**0.09**	**0.36**	**0.03**	**0.12**
OS-Q2*	**0.22**	**0.00**	**0.45**	**0.59**	**0.22**	**0.09**	**0.36**	**0.09**	**0.36**	**0.02**	**0.08**
OS-R*	**1.04**	**0.00**	**0.45**	**0.59**	**1.04**	**0.09**	**0.36**	**0.09**	**0.36**	**0.09**	**0.38**
OS-S1*	**0.31**	**0.00**	**0.45**	**0.59**	**0.31**	**0.09**	**0.36**	**0.09**	**0.36**	**0.03**	**0.11**
OS-S2*	**0.13**	**0.00**	**0.45**	**0.59**	**0.13**	**0.09**	**0.36**	**0.09**	**0.36**	**0.01**	**0.05**
OS-T2*	**0.30**	**0.00**	**0.45**	**0.59**	**0.30**	**0.09**	**0.36**	**0.09**	**0.36**	**0.03**	**0.11**

BASIN* = BASIN AREA REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM

JOB NAME: ***WATERBURY FDR***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALC'D BY: ***QNA***

PELIMINARY DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
A	1.52	2.00	0.25	100	2	12.6	420	1.5%	4.3	1.6	14.3	3.54	6.03	**5**	**12**
B1	1.03	1.36	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.2	3.55	6.05	**4**	**8**
B2	1.61	2.11	0.25	100	2	12.6	550	1.5%	4.3	2.1	14.8	3.49	5.93	**6**	**13**
C	0.39	0.51	0.25	20	0.5	5.3	500	2.0%	4.9	1.7	6.9	4.58	8.14	**2**	**4**
D	0.95	1.24	0.25	80	2	10.5	300	2.5%	5.5	0.9	11.4	3.87	6.69	**4**	**8**
E	0.98	1.29	0.25	100	2	12.6	400	2.5%	5.5	1.2	13.8	3.59	6.12	**4**	**8**
F	0.98	1.29	0.25	50	2	7.1	620	1.5%	4.3	2.4	9.5	4.14	7.22	**4**	**9**
G1	0.24	0.31	0.25								5.0	5.00	9.06	**1**	**3**
G2	0.31	0.41	0.25								5.0	5.00	9.06	**2**	**4**
H	0.66	0.86	0.25	50	2	7.1	525	1.5%	4.3	2.0	9.2	4.19	7.33	**3**	**6**
I	0.97	2.12	0.25	80	4	8.4	250	2.0%	4.9	0.8	9.2	4.18	7.32	**4**	**16**
J	0.65	0.85	0.25	90	6	8.1	850	2.0%	4.9	2.9	10.9	3.94	6.81	**3**	**6**
K	0.69	1.37	0.25	100	18	6.1	80	1.0%	3.5	0.4	6.5	4.67	8.33	**3**	**11**
L1	1.71	2.24	0.25	100	2	12.6	860	1.4%	4.1	3.5	16.1	3.36	5.69	**6**	**13**
L2	0.90	1.18	0.25	55	1.1	9.4	860	1.4%	4.1	3.5	12.8	3.70	6.34	**3**	**7**
M1	0.44	0.58	0.25	70	1.5	10.3	200	2.0%	4.9	0.7	11.0	3.92	6.79	**2**	**4**
M2	0.16	0.21	0.25	65	3	7.7	0	0.0%	0.0	0.0	7.7	4.43	7.83	**1**	**2**
N	0.10	0.13	0.25								5.0	5.00	9.06	**1**	**1**
O1	1.27	1.66	0.25	100	2.5	11.7	460	1.5%	4.3	1.8	13.5	3.62	6.19	**5**	**10**
O2	0.32	0.42	0.25	100	2	12.6	850	2.0%	4.9	2.9	15.5	3.42	5.80	**1**	**2**
O3	0.20	0.27	0.25								5.0	5.00	9.06	**1**	**2**
O4	0.17	0.23	0.25								5.0	5.00	9.06	**1**	**2**
P	0.06	0.25	0.25								5.0	5.00	9.06	**0**	**2**
Q1	0.66	0.87	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	**3**	**6**

JOB NAME: ***WATERBURY FDR***
JOB NUMBER: ***1715.00***
DATE: ***07/20/22***
CALC'D BY: ***QNA***

PELIMINARY DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

BASIN	WEIGHTED CA(5)	WEIGHTED CA(100)	OVERLAND C(5)	OVERLAND Length (ft)	OVERLAND Height (ft)	OVERLAND Tc (min)	STREET / CHANNEL FLOW Length (ft)	STREET / CHANNEL FLOW Slope (%)	STREET / CHANNEL FLOW Velocity (fps)	STREET / CHANNEL FLOW Tc (min)	Tc TOTAL (min)	INTENSITY I(5) (in/hr)	INTENSITY I(100) (in/hr)	TOTAL FLOWS Q(5) (cfs)	TOTAL FLOWS Q(100) (cfs)
Q2	0.43	0.56	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	2	4
R	0.46	0.60	0.25	100	4	10.1	700	2.0%	4.9	2.4	12.4	3.75	6.44	2	4
S1	0.70	0.91	0.25	100	6	8.8	175	2.0%	4.9	0.6	9.4	4.16	7.26	3	7
S2	0.06	0.08	0.25								5.0	5.00	9.06	0	1
T1	0.64	0.84	0.25	55	1.1	9.4	390	2.0%	4.9	1.3	10.7	3.97	6.88	3	6
T2	0.55	0.73	0.25	100	2	12.6	245	2.0%	5.0	0.8	13.5	3.63	6.20	2	5
U1	1.97	2.58	0.25	100	2	12.6	520	2.3%	5.3	1.6	14.3	3.54	6.03	7	16
U2	0.85	1.11	0.25	100	2	12.6	385	2.3%	5.4	1.2	13.8	3.59	6.12	3	7
V	0.24	0.32	0.25								5.0	5.00	9.06	1	3
W	2.34	3.07	0.25	100	2	12.6	630	1.6%	4.4	2.4	15.0	3.47	5.89	8	18
X	0.19	0.25	0.25								5.0	5.00	9.06	1	2
Y	0.16	0.21	0.25								5.0	5.00	9.06	1	2
OS-1*	**3.70**	**14.79**	**0.25**	**100**	**2**	**12.6**	**2700**	**2.3%**	**5.3**	**8.5**	**21.1**	**2.97**	**4.94**	**11**	**73**
OS-2*	**1.08**	**4.33**	**0.25**	**100**	**2**	**12.6**	**1203**	**1.0%**	**3.5**	**5.7**	**18.4**	**3.17**	**5.32**	**3**	**23**
OS-4	0.98	3.92	0.25	800	26	30.5					30.5	2.46	4.01	**2**	**16**
OS-5	0.51	2.03	0.25	80	5	7.8					7.8	4.42	7.82	2	16
OS-6	0.48	0.63	0.25	30	0.6	6.9	900	1.8%	4.7	3.2	10.1	4.05	7.04	2	4
OS-7*	0.25	1.01	0.25								5.0	5.00	9.06	1	9
OS-8	FLOW TAKEN FROM MERIDAIN RANCH MDDP													5	11
OS-9	FLOW TAKEN FROM MERIDAIN RANCH MDDP													8	19
OS-Q1*	**0.03**	**0.12**	**0.25**	**100**	**2**	**12.6**	**135**	**1.5%**	**4.3**	**0.5**	**13.2**	**3.66**	**6.27**	**0**	**1**
OS-Q2*	**0.02**	**0.08**	**0.25**	**50**	**1**	**8.9**	**135**	**1.5%**	**4.3**	**0.5**	**9.5**	**4.14**	**7.24**	**0**	**1**
OS-R*	**0.09**	**0.38**	**0.25**	**100**	**2**	**12.6**	**50**	**2.7%**	**5.8**	**0.1**	**12.8**	**3.70**	**6.35**	**0**	**2**
OS-S1*	**0.03**	**0.11**	**0.25**								**5.0**	**5.00**	**9.06**	**0**	**1**

JOB NAME:	***WATERBURY FDR***
JOB NUMBER:	***1715.00***
DATE:	***07/20/22***
CALC'D BY:	***QNA***

PELIMINARY DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

BASIN	WEIGHTED CA(5)	WEIGHTED CA(100)	OVERLAND C(5)	OVERLAND Length (ft)	OVERLAND Height (ft)	OVERLAND Tc (min)	STREET / CHANNEL FLOW Length (ft)	STREET / CHANNEL FLOW Slope (%)	STREET / CHANNEL FLOW Velocity (fps)	STREET / CHANNEL FLOW Tc (min)	Tc TOTAL (min)	INTENSITY I(5) (in/hr)	INTENSITY I(100) (in/hr)	TOTAL FLOWS Q(5) (cfs)	TOTAL FLOWS Q(100) (cfs)
OS-S2*	**0.01**	**0.05**	**0.25**								**5.0**	**5.00**	**9.06**	**0**	**0**
OS-T2*	**0.03**	**0.11**	**0.25**								**5.0**	**5.00**	**9.06**	**0**	**1**

BASIN* = BASIN AREA REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM

JOB NAME: ***WATERBURY FDR***
JOB NUMBER: ***1715.00***
DATE: ***10/01/22***
CALCULATED BY: ***QNA***

PELIMINARY DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Facility Size
						I(5)	I(100)	Q(5)	Q(100)	
1	A	3.39	1.52	2.00	14.3	3.54	6.03	5	12	10' Type R Sump Inlet
2	C	0.86	0.39	0.51	6.9	4.58	8.14	2	4	5' Type R Sump Inlet
3	B1	2.30	1.03	1.36	14.2	3.55	6.05	4	8	5' Type R Sump Inlet
4	B2	3.58	1.61	2.11	14.8	3.49	5.93	6	13	10' Type R Sump Inlet
5	F & H	3.65	1.64	2.15	9.5	4.14	7.22	7	16	10' Type R Sump Inlet
6	D	2.11	0.95	1.24	11.4	3.87	6.69	4	8	5' Type R Sump Inlets
7	E	2.18	0.98	1.29	13.8	3.59	6.12	4	8	5' Type R Sump Inlets
7A	G1	0.53	0.24	0.31	5.0	5.00	9.06	1	3	5' Type R At-grade Inlet
7B	G2	0.69	0.31	0.41	5.0	5.00	9.06	2	4	5' Type R At-grade Inlet
8	DESIGN POINTS 1-7 & K	18.06	8.13	10.66	14.8	3.49	5.93	28	63	FSD Pond 1
9	OS-9	11.80						8	19	EX 36" RCP Culvert
10	OS-8	2.56						5	11	EX 36" RCP Culvert
10A	MERIDIAN POND E RELEASE	Meridaian Ranch Filing 3 FDR Calculated Flows						28	185	EX 3-42" RCP Culverts
11	OS-5, I, OS-& MERIDIAN POND E RELEASE	Sum of Basins						34	216	PR 2-42" RCP Culverts
11A	DP 11 & BASIN J	Sum of Basins						37	222	PR 2-42" RCP Culverts

JOB NAME: ***WATERBURY FDR***
JOB NUMBER: ***1715.00***
DATE: ***10/01/22***
CALCULATED BY: ***QNA***

PELIMINARY DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		
						I(5)	I(100)	Q(5)	Q(100)	Facility Size
12	OS-6	1.06	0.48	0.63	10.1	4.05	7.04	2	4	18"' RCP Culvert
13	TOTAL OFFISITE EX. STOCK POND INFLOW	Per "Final Drainage Report for Waterbury Filing No. 1" dated September 2016, by Classic Consulting						69	396	EX STOCK POND
14	L1	3.79	1.71	2.24	16.1	3.36	5.69	6	13	10' Type R Sump Inlet
15	L2	2.00	0.90	1.18	16.1	3.36	5.69	3	7	5' Type R Sump Inlet
16	O1	2.82	1.27	1.66	13.5	3.62	6.19	5	10	10' Type R Sump Inlet
17	O2	0.71	0.32	0.42	15.5	3.42	5.80	1	2	5' Type R Sump Inlet
18	DESIGN POINTS 14-17 & BASIN 0S-4	20.23	5.18	5.50	16.1	3.36	5.69	17	31	Interim FSD Pond 2
19*	**Q1 & OS-Q1**	**1.81**	**0.69**	**0.99**	**13.2**	**3.66**	**6.27**	**3**	**6**	**10' Type R Sump Inlet**
20*	**Q2 & OS-Q2**	**1.18**	**0.45**	**0.65**	**9.5**	**4.14**	**7.24**	**2**	**5**	**5' Type R Sump Inlet**
21*	**R & OS-R**	**2.06**	**0.55**	**0.98**	**12.4**	**3.75**	**6.44**	**2**	**6**	**10' Type R At-grade Inlet**
22*	**S1 & OS-S1**	**1.86**	**0.72**	**1.02**	**12.4**	**3.75**	**6.44**	**3**	**7**	**10' Type R Sump Inlet**
23*	**S2 & OS-S2**	**0.27**	**0.07**	**0.13**	**5.0**	**5.00**	**9.06**	**0**	**1**	**10' Type R Sump Inlet**
24*	**T1**	**1.42**	**0.64**	**0.84**	**10.7**	**3.97**	**6.88**	**3**	**6**	**5' Type R Sump Inlets**
25*	**T2 & OS-T2**	**1.54**	**0.58**	**0.84**	**13.5**	**3.63**	**6.20**	**2**	**5**	**5' Type R Sump Inlets**
26*	**U1**	**4.38**	**1.97**	**2.58**	**14.3**	**3.54**	**6.03**	**7**	**16**	**10' Type R Sump Inlets**

JOB NAME: *WATERBURY FDR*
JOB NUMBER: *1715.00*
DATE: *10/01/22*
CALCULATED BY: *QNA*

PELIMINARY DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		
						I(5)	I(100)	Q(5)	Q(100)	Facility Size
27*	**U2**	**1.89**	**0.85**	**1.11**	**13.8**	**3.59**	**6.12**	**3**	**7**	**5' Type R Sump Inlets**
28	**W**	**5.20**	**2.34**	**3.07**	**15.0**	**3.47**	**5.89**	**8**	**18**	**2-10' Type R Sump Inlets**
29*	**DESIGN POINTS 19-28 & OS-7**	**24.41**	**9.13**	**13.21**	**15.0**	**3.47**	**5.89**	**32**	**78**	**FSD POND 3**
E-E*	**OS-2 & OS-8**	**14.58**	**2.66**	**6.20**	**18.4**	**3.17**	**5.32**	**8**	**33**	**DIVERSION SWALE E-E**
30*	**Y, OS-1, OS-2, OS-8 & OS-9**	**67.82**	**9.32**	**20.34**	**21.1**	**2.97**	**4.94**	**36**	**120**	**Triple 36" RCP Culverts**
31	V	0.54	0.24	0.32	5.0	5.00	9.06	1	3	18" DIA INLETS
32	X	0.43	0.19	0.25	5.0	5.00	9.06	1	2	18" DIA INLETS
33	O-3	0.45	0.20	0.27	5.0	5.00	9.06	1	2	18" DIA INLETS
34	O-4	0.38	0.17	0.23	5.0	5.00	9.06	1	2	18" DIA INLETS

DESIGN POINT* = **DESIGN POINT REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM**

JOB NAME: *WATERBURY FDR*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE.
REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

PELIMINARY DRAINAGE REPORT ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Pipe Size*
					I(5)	I(100)	Q(5)	Q(100)	
1	DP 2	0.39	0.51	6.9	4.58	8.14	2	4	18" RCP
2	DP 1 & 2	1.91	2.51	14.3	3.54	6.03	7	15	24" RCP
3	DP 3	1.03	1.36	14.2	3.55	6.05	4	8	18" RCP
4	DP-4	1.61	2.11	14.8	3.49	5.93	6	13	18" RCP
5	DP 3 & 4	2.64	3.47	14.8	3.49	5.93	9	21	24" RCP
6	DP 1-4	4.56	5.97	14.8	3.49	5.93	16	35	36" RCP
7	DP-1-5	6.20	8.12	14.8	3.49	5.93	22	48	36" RCP
8	DP-6	0.95	1.24	11.4	3.87	6.69	4	8	18" RCP
9	DP-7	0.98	1.29	13.8	3.59	6.12	4	8	18" RCP
10	DP-6 & 7	1.93	2.53	13.8	3.59	6.12	7	15	24" RCP
10A	DP-7A	0.24	0.31	5.0	5.00	9.06	1	3	15" RCP
10B	DP-7A & 7B	0.55	0.72	5.0	5.00	9.06	3	7	18" RCP
10C	Pond 1 Release						0.4	14.5	18" RCP
11	DP-14	1.71	2.24	16.1	3.36	5.69	6	13	24" RCP

JOB NAME: *WATERBURY FDR*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE.
REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

PELIMINARY DRAINAGE REPORT ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		
					I(5)	I(100)	Q(5)	Q(100)	Pipe Size*
12	DP-15	0.90	1.18	16.1	3.36	5.69	3	7	18" RCP
13	DP 14 & 15	2.61	3.42	16.1	3.36	5.69	9	19	30" RCP
14	DP 16	1.27	1.66	13.5	3.62	6.19	5	10	24" RCP
15	DP 14, 15 & 16	3.88	5.08	16.1	3.36	5.69	13	29	36" RCP
16	DP 17	0.32	0.42	15.5	3.42	5.80	1	2	18" RCP
17	DP 14, 15, 16, & 17	4.20	5.50	16.1	3.36	5.69	14	31	36" RCP
17A	Pond 2 Release						1.1	2.4	18" RCP
18*	**DP 19**	**0.69**	**0.99**	**13.2**	**3.66**	**6.27**	**3**	**6**	**24" RCP**
19*	**DP 20**	**0.45**	**0.65**	**9.5**	**4.14**	**7.24**	**2**	**5**	**18" RCP**
20*	**DP 19 & 20**	**1.15**	**1.64**	**13.2**	**3.66**	**6.27**	**4**	**10**	**24" RCP**
21*	**DP 21 PICK UP**						**2**	**6**	**18" RCP**
22*	**DP 19, 20 & 21**	**1.69**	**2.59**	**13.2**	**3.66**	**6.27**	**6**	**16**	**30" RCP**
23*	**DP 22**	**0.72**	**1.02**	**12.4**	**3.75**	**6.44**	**3**	**7**	**24" RCP**
24*	**DP 23**	**0.07**	**0.13**	**5.0**	**5.00**	**9.06**	**0**	**1**	**24" RCP**

JOB NAME: *WATERBURY FDR*
JOB NUMBER: *1715.00*
DATE: *07/20/22*
CALCULATED BY: *QNA*

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE.
REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

PELIMINARY DRAINAGE REPORT ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Pipe Size*
					I(5)	I(100)	Q(5)	Q(100)	
25*	**DP 22 & 23**	**0.80**	**1.15**	**12.4**	**3.75**	**6.44**	**3**	**7**	**30" RCP**
26*	**DP 19 -23**	**2.49**	**3.74**	**13.2**	**3.66**	**6.27**	**9**	**23**	**36" RCP**
27*	**DP 24**	**0.64**	**0.84**	**10.7**	**3.97**	**6.88**	**3**	**6**	**18" RCP**
28*	**DP 25**	**0.58**	**0.84**	**13.5**	**3.63**	**6.20**	**2**	**5**	**18" RCP**
29*	**DP 19-25**	**3.71**	**5.42**	**13.5**	**3.63**	**6.20**	**13**	**34**	**36" RCP**
30*	**DP 26**	**1.97**	**2.58**	**14.3**	**3.54**	**6.03**	**7**	**16**	**24" RCP**
31*	**DP 19-26**	**5.68**	**8.00**	**14.3**	**3.54**	**6.03**	**20**	**48**	**42" RCP**
32*	**DP 27**	**0.85**	**1.11**	**13.8**	**3.59**	**6.12**	**3**	**7**	**18" RCP**
33*	**DP 19-27 & 31**	**6.77**	**9.43**	**14.3**	**3.54**	**6.03**	**24**	**57**	**42" RCP**
34	DP 28	2.34	3.07	15.03	3.47	5.89	8	18	24" RCP
34A	29 & 32	2.53	3.32	15.0	3.47	5.89	9	20	30" RCP
35	Pond 3 Release	MHFD UD-DETENTION POND RELEASE					1	58	36" RCP
36*	DP 30	SUM OF BASINS					36	120	TRIPLE 36" RCP
37	DP 31	0.24	0.32	5.00	5.00	9.06	1	3	15" HDPE
38	DP 32	0.19	0.25	5.00	5.00	9.06	1	2	15" HDPE
39	DP 33	0.20	0.27	5.00	5.00	9.06	1	2	15" HDPE
40	DP 34	0.17	0.23	5.00	5.00	9.06	1	2	15" HDPE

PIPE RUN* = **PIPE RUN REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM**

HYDRAULIC CALCULATIONS

PRELIMINARY GRADING SWALES

MANNING'S EQUATION for OPEN CHANNEL FLOW

Project: **WATERBURY 1&2 MDP/PDR** Location: DP-PRE1 DIVERSIONS SWALE A-A

By: QNA Date: 3/1/2022

Chk By: Date: version 12-2004

Mannings Formula

$Q = (1.486/n)AR_h^{2/3}S^{1/2}$

R = A/P

A = cross sectional area

P= wetted perimeter

S = slope of channel

n = Manning's roughness coefficient

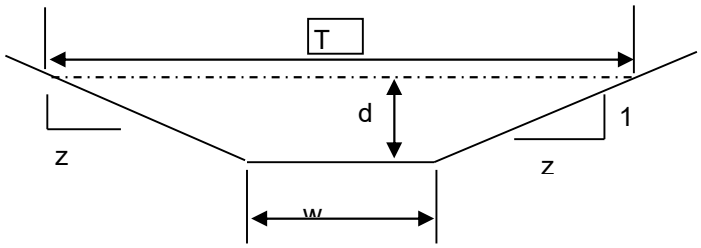

$V = (1.49/n)R_h^{2/3}S^{1/2}$

Q = V x A

INPUT

z (sideslope)=	4
z (sideslope)=	4
b (btm width, ft)=	2
d (depth, ft)=	1
S (slope, ft/ft)	0.02
n_{low} =	0.02
n_{high} =	0.035

Clear Data Entry Cells

				Low N		High N			
Depth, ft	Area, sf	Wetted Perimeter, ft	Hydraulic Radius, ft	Velocity, fps	Flow, cfs	Velocity, fps	Flow, cfs		
1	6.00	10.25	0.59	7.35452611	44.1272	4.202586	25.2155	T =	10
								Dm =	0.600
				Sc low =	0.0071	Sc high =	0.0218		
				.7 Sc	1.3 Sc	.7 Sc	1.3 Sc		
				0.0050	0.0093	0.0153	0.0284		

s_c = critical slope ft / ft

T = top width of the stream

d_m = a/T = mean depth of flow

Created by: Mike O'Shea

MANNING'S EQUATION for OPEN CHANNEL FLOW

Project: **WATERBURY 1&2 MDP/PDR** Location: DP-PRE2 DIVERSIONS SWALE B-B

By: QNA Date: 5/11/2022

Chk By: Date: version 12-2004

Mannings Formula

$Q = (1.486/n)AR_h^{2/3}S^{1/2}$

R = A/P

A = cross sectional area

P= wetted perimeter

S = slope of channel

n = Manning's roughness coefficient

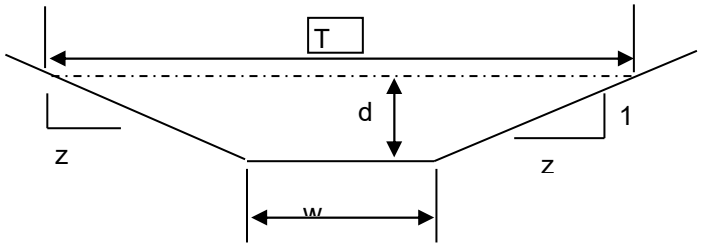

$V = (1.49/n)R_h^{2/3}S^{1/2}$

Q = V x A

INPUT	
z (sideslope)=	4
z (sideslope)=	4
b (btm width, ft)=	2
d (depth, ft)=	0.94
S (slope, ft/ft)	0.02
n_{low} =	0.02
n_{high} =	0.035

Clear Data Entry Cells

				Low N		High N			
Depth, ft	Area, sf	Wetted Perimeter, ft	Hydraulic Radius, ft	Velocity, fps	Flow, cfs	Velocity, fps	Flow, cfs		
0.94	5.41	9.75	0.56	7.09822442	38.4326	4.056128	21.9615	T =	9.52
								Dm =	0.569
				Sc low =	0.0073	Sc high =	0.0222		
				.7 Sc	1.3 Sc	.7 Sc	1.3 Sc		
				0.0051	0.0094	0.0156	0.0289		

s_c = critical slope ft / ft

T = top width of the stream

d_m = a/T = mean depth of flow

Created by: Mike O'Shea

MANNING'S EQUATION for OPEN CHANNEL FLOW

Project: **WATERBURY 1&2 MDP/PDR** Location: DP-PRE3 DIVERSIONS SWALE C-C

By: QNA Date: 3/1/2022

Chk By: Date: version 12-2004

Mannings Formula

$Q = (1.486/n)AR_h^{2/3}S^{1/2}$

R = A/P

A = cross sectional area

P= wetted perimeter

S = slope of channel

n = Manning's roughness coefficient

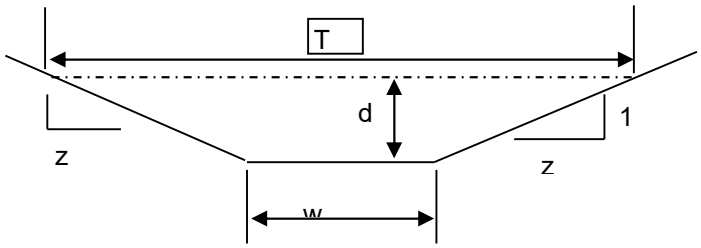

$V = (1.49/n)R_h^{2/3}S^{1/2}$

Q = V x A

INPUT	
z (sideslope)=	4
z (sideslope)=	4
b (btm width, ft)=	3
d (depth, ft)=	1.04
S (slope, ft/ft)	0.02
n_{low} =	0.02
n_{high} =	0.035

Clear Data Entry Cells

				Low N		High N			
Depth, ft	Area, sf	Wetted Perimeter, ft	Hydraulic Radius, ft	Velocity, fps	Flow, cfs	Velocity, fps	Flow, cfs		
1.04	7.45	11.58	0.64	7.82986896	58.3043	4.474211	33.3168	T =	11.32
								Dm =	0.658
				Sc low =	0.0069	Sc high =	0.0211		
				.7 Sc	1.3 Sc	.7 Sc	1.3 Sc		
				0.0048	0.0090	0.0148	0.0275		

s_c = critical slope ft / ft

T = top width of the stream

d_m = a/T = mean depth of flow

Created by: Mike O'Shea

MANNING'S EQUATION for OPEN CHANNEL FLOW

Project:	**WATERBURY 1&2 MDP/PDR**	Location:	DP-PRE4 DIVERSIONS SWALE D-D	
By:	QNA	Date:	3/1/2022	
Chk By:		Date:		version 12-2004

Mannings Formula

$Q = (1.486/n)AR_h^{2/3}S^{1/2}$

R = A/P

A = cross sectional area

P= wetted perimeter

S = slope of channel

n = Manning's roughness coefficient

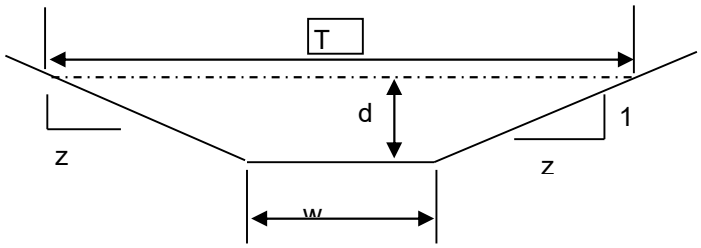

$V = (1.49/n)R_h^{2/3}S^{1/2}$

Q = V x A

INPUT	
z (sideslope)=	4
z (sideslope)=	4
b (btm width, ft)=	2
d (depth, ft)=	0.86
S (slope, ft/ft)	0.02
n_{low} =	0.02
n_{high} =	0.035

Clear Data Entry Cells

				Low N		High N			
Depth, ft	Area, sf	Wetted Perimeter, ft	Hydraulic Radius, ft	Velocity, fps	Flow, cfs	Velocity, fps	Flow, cfs		
0.86	4.68	9.09	0.51	6.74726399	31.5664	3.855579	18.0379	T =	8.88
								Dm =	0.527
				Sc low =	0.0074	Sc high =	0.0228		
				.7 Sc	1.3 Sc	.7 Sc	1.3 Sc		
				0.0052	0.0097	0.0160	0.0296		

s_c = critical slope ft / ft

T = top width of the stream

d_m = a/T = mean depth of flow

Created by: Mike O'Shea

MANNING'S EQUATION for OPEN CHANNEL FLOW

Project: **WATERBURY 1&2 MDP/PDR** Location: DP-PRE5 DIVERSIONS SWALE E-E

By: QNA Date: 3/1/2022

Chk By: Date: version 12-2004

Mannings Formula

$Q = (1.486/n)AR_h^{2/3}S^{1/2}$

R = A/P

A = cross sectional area

P= wetted perimeter

S = slope of channel

n = Manning's roughness coefficient

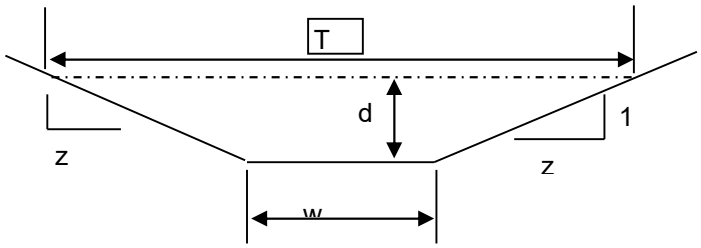

$V = (1.49/n)R_h^{2/3}S^{1/2}$

Q = V x A

INPUT

z (sideslope)=	4
z (sideslope)=	4
b (btm width, ft)=	4
d (depth, ft)=	0.99
S (slope, ft/ft)	0.02
n_{low} =	0.02
n_{high} =	0.035

Clear Data Entry Cells

				Low N		High N			
Depth, ft	Area, sf	Wetted Perimeter, ft	Hydraulic Radius, ft	Velocity, fps	Flow, cfs	Velocity, fps	Flow, cfs		
0.99	7.88	12.16	0.65	7.86716151	61.9964	4.495521	35.4265	T =	11.92
								Dm =	0.661
				Sc low =	0.0069	Sc high =	0.0210		
				.7 Sc	1.3 Sc	.7 Sc	1.3 Sc		
				0.0048	0.0089	0.0147	0.0273		

s_c = critical slope ft / ft

T = top width of the stream

d_m = a/T = mean depth of flow

Created by: Mike O'Shea

MDDP
INLET CALCULATIONS

Figure 8-11. Inlet Capacity Chart Sump Conditions , Curb Opening (Type R) Inlet

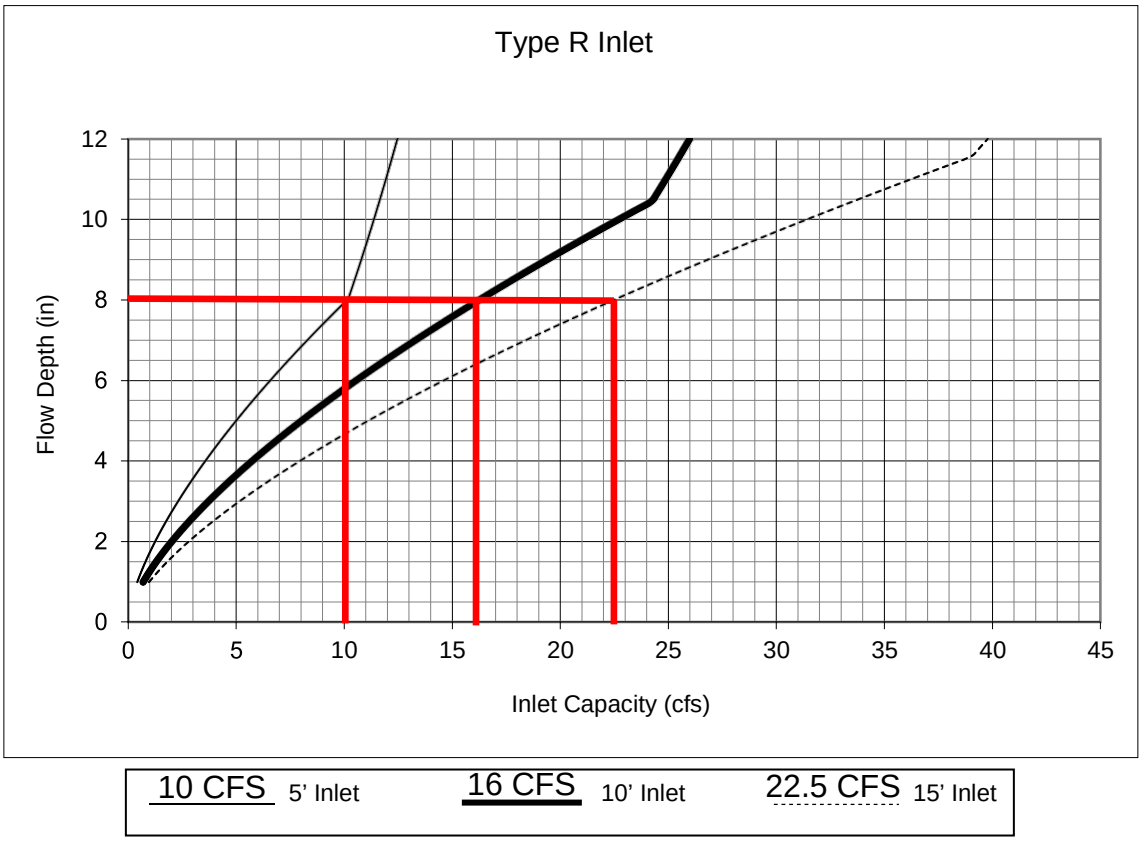

DP1: Q100=12 CFS ---> 10' INLET
DP2: Q100= 4 CFS ---> 5' INLET
DP3: Q100= 8 CFS ---> 5' INLET
DP4: Q100=13 CFS ---> 10' INLET
DP5: Q100=16 CFS ---> 10' INLET
DP6: Q100= 8 CFS ---> 5' INLET
DP7: Q100= 8 CFS ---> 5' INLET
DP14: Q100=13 CFS ---> 10' INLET
DP15: Q100= 7 CFS ---> 5' INLET
DP16: Q100= 10 CFS ---> 10' INLET
DP17: Q100= 2 CFS ---> 10' INLET
DP19: Q100= 16 CFS ---> 10' INLET
DP20: Q100= 7 CFS ---> 5' INLET
DP22: Q100= 16 CFS ---> 10' INLET
DP23: Q100= 16 CFS ---> 10' INLET
DP24: Q100= 6 CFS ---> 5' INLET
DP25: Q100= 7 CFS ---> 5' INLET
DP26: Q100= 16 CFS ---> 10' INLET
DP27: Q100= 7 CFS ---> 5' INLET
DP28: Q100= 18 CFS --->2-10' INLETS

Notes:
1. The standard inlet parameters must apply to use this chart.

DP 7A 5' At-Grade Inlet
Q_5 = 1 cfs, Q_{100} = 3 cfs
Sag Inlet Slope = 3.11%

Figure 8-7. Inlet Capacity Chart Continuous Grade Conditions, Residential (Local)
(Attached and Detached Sidewalk)

Street Section Data: Street Width Flowline to Flowline = 34'
Type of Curb and Gutter: D-10-R = 8" vertical
Type 16 = 6" vertical

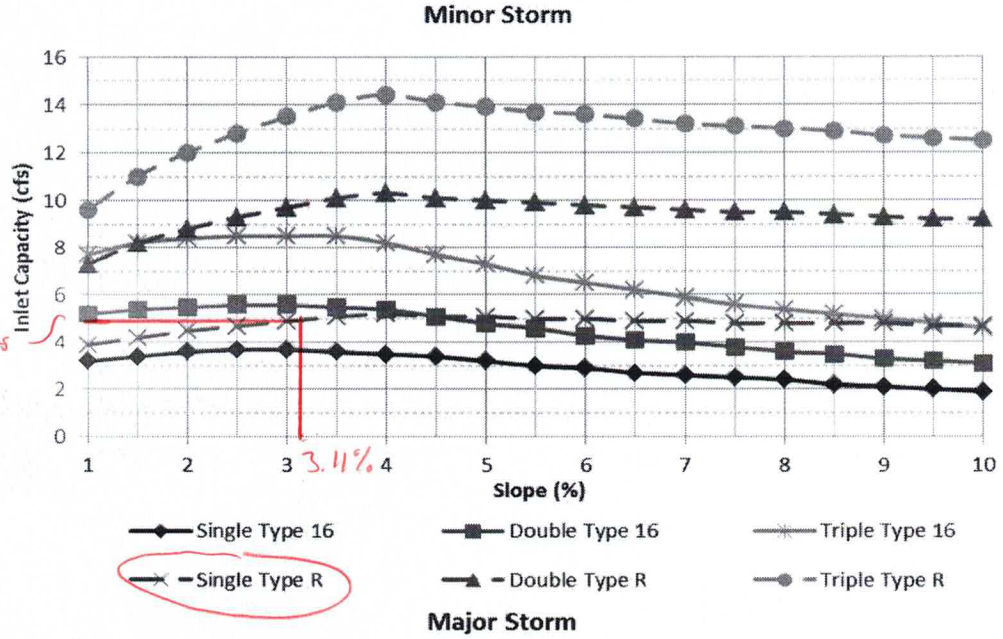

5 cfs ≥ 1
ok
Full Capture

5 cfs

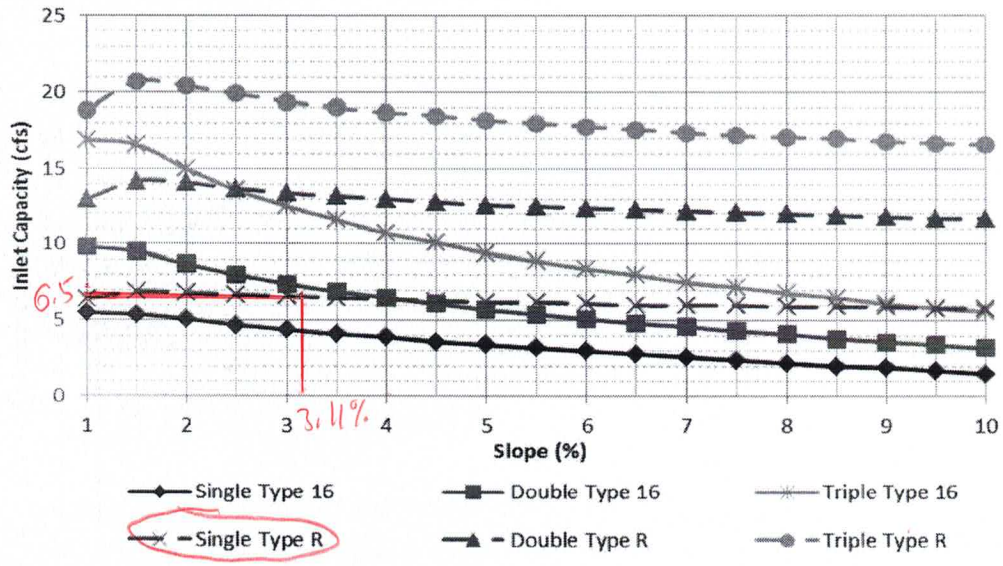

6.5 ≥ 3
ok
Full Capture

The standard street section parameters as defined in Chapter 7 must apply to use these charts. For non-standard sections, the inlet capacity shall be calculated using the UDFCD spreadsheets. The maximum spread width is limited by the curb height based on no curb overtopping during a minor storm and flow being contained within the public right-of-way during the major storm. Calculations were done using UD-Inlet 3.00.xls, Mar., 2011 with the default clogging factors.

DP 7B 5' At-Grade Inlet
$Q_5 = 2$ cfs, $Q_{100} = 4$ cfs
Daylight Slope = 2.90%

Figure 8-7. Inlet Capacity Chart Continuous Grade Conditions, Residential (Local)
(Attached and Detached Sidewalk)

Street Section Data: Street Width Flowline to Flowline = 34'
Type of Curb and Gutter: D-10-R = 8" vertical
Type 16 = 6" vertical

5<2
OK
Full Capture

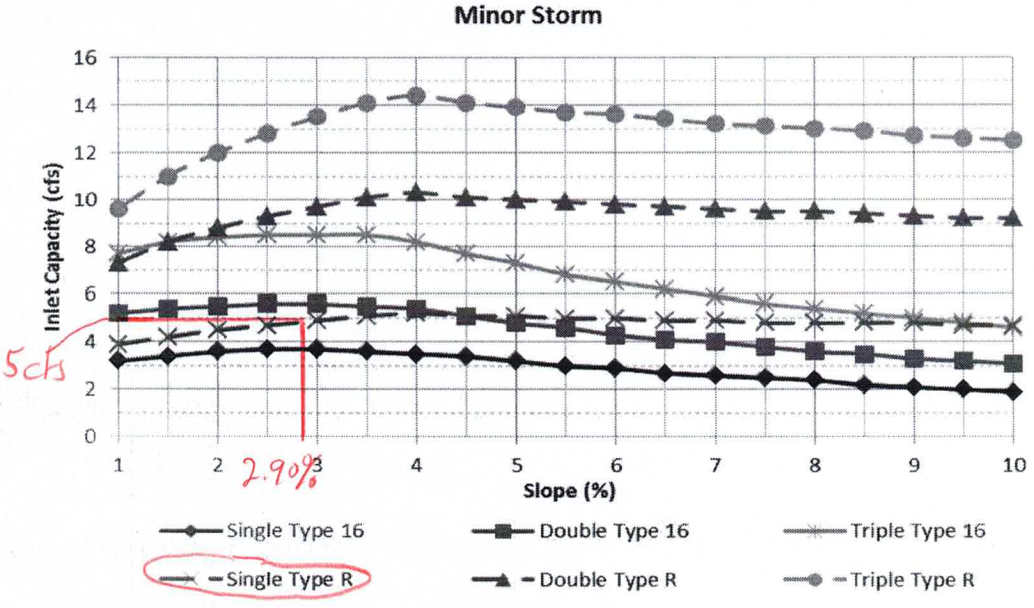

6.4<4
OK
Full Capture

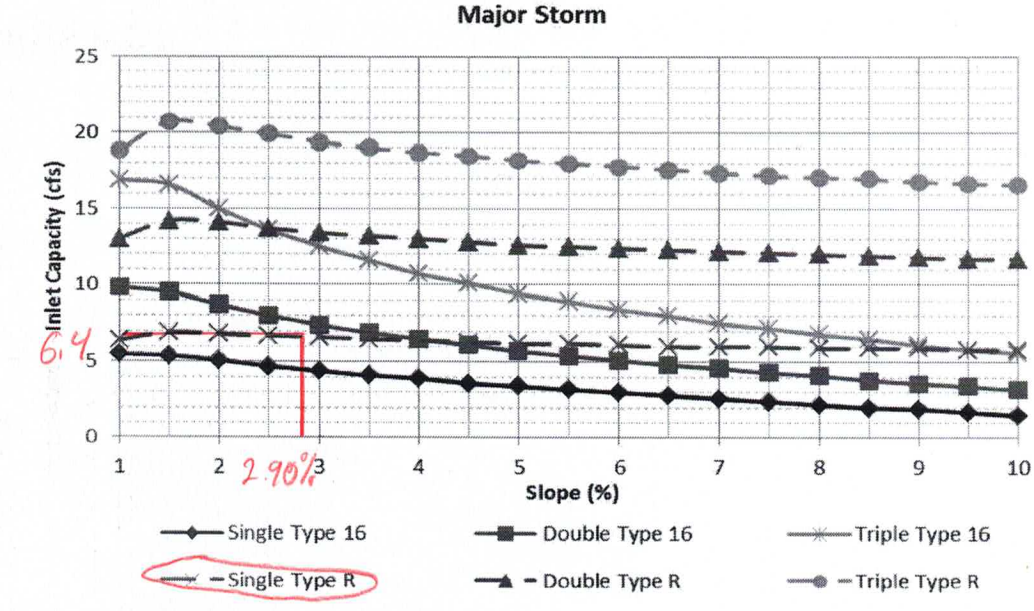

The standard street section parameters as defined in Chapter 7 must apply to use these charts. For non-standard sections, the inlet capacity shall be calculated using the UDFCD spreadsheets. The maximum spread width is limited by the curb height based on no curb overtopping during a minor storm and flow being contained within the public right-of-way during the major storm. Calculations were done using UD-Inlet 3.00.xls, Mar., 2011 with the default clogging factors.

DP-21 10' TYPE R - At Grade
$Q_5 = 12$, $Q_{100} = 28$
Muddy Pond Slope = 1.75%

Figure 8-7. Inlet Capacity Chart Continuous Grade Conditions, Residential (Local)
(Attached and Detached Sidewalk)

Street Section Data: Street Width Flowline to Flowline = 34'
Type of Curb and Gutter: D-10-R = 8" vertical
Type 16 = 6" vertical

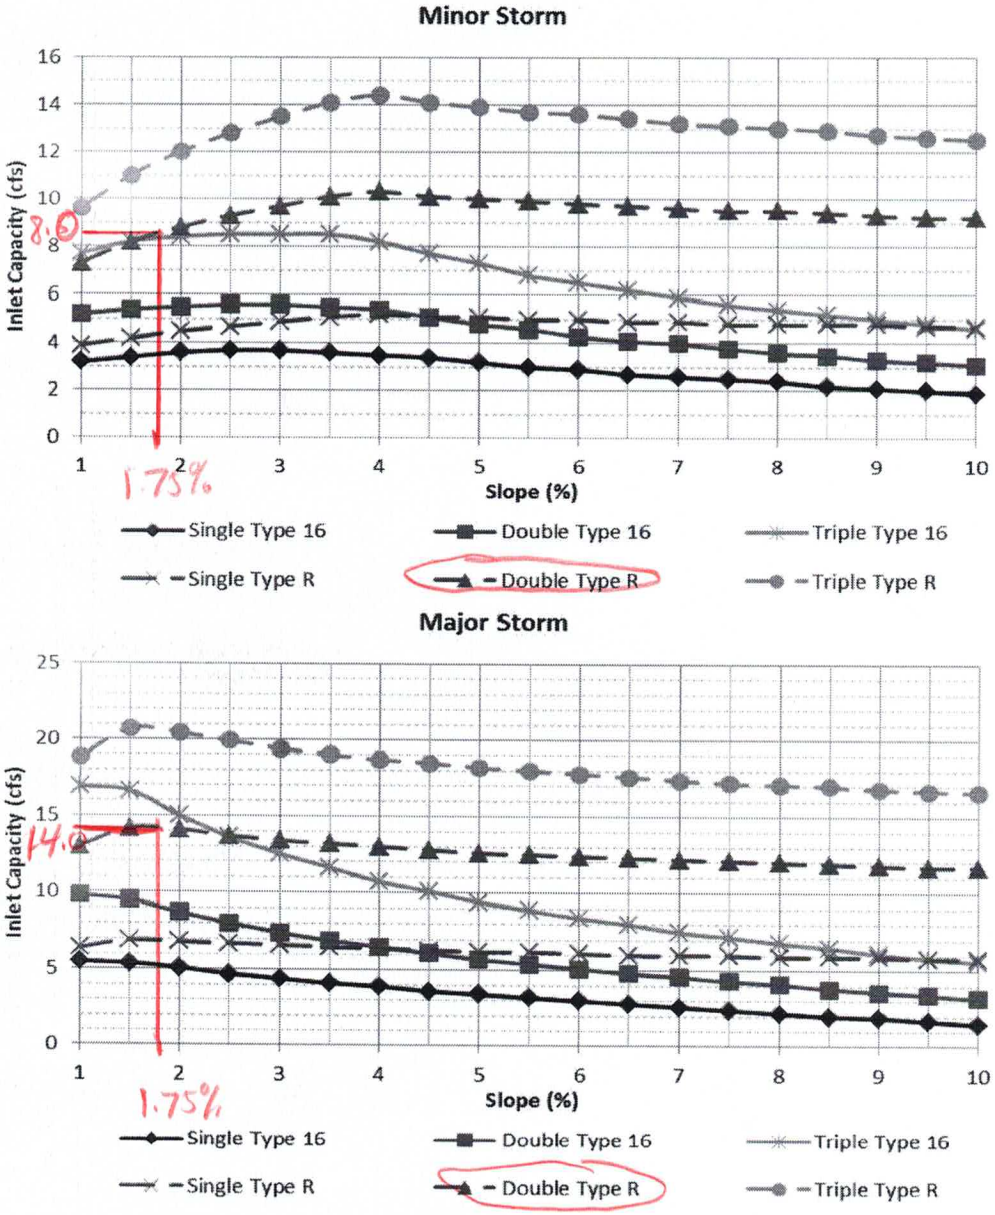

Captured:
$Q_5 = 8.0$ cfs
$Q_{100} = 14.0$ cfs

By Pass:
$Q_5 = 4.0$ cfs
$Q_{100} = 14.00$ cfs

The standard street section parameters as defined in Chapter 7 must apply to use these charts. For non-standard sections, the inlet capacity shall be calculated using the UDFCD spreadsheets. The maximum spread width is limited by the curb height based on no curb overtopping during a minor storm and flow being contained within the public right-of-way during the major storm. Calculations were done using UD-Inlet 3.00.xls, Mar., 2011 with the default clogging factors.

Nyloplast 18" Drop In Grate Inlet Capacity Chart

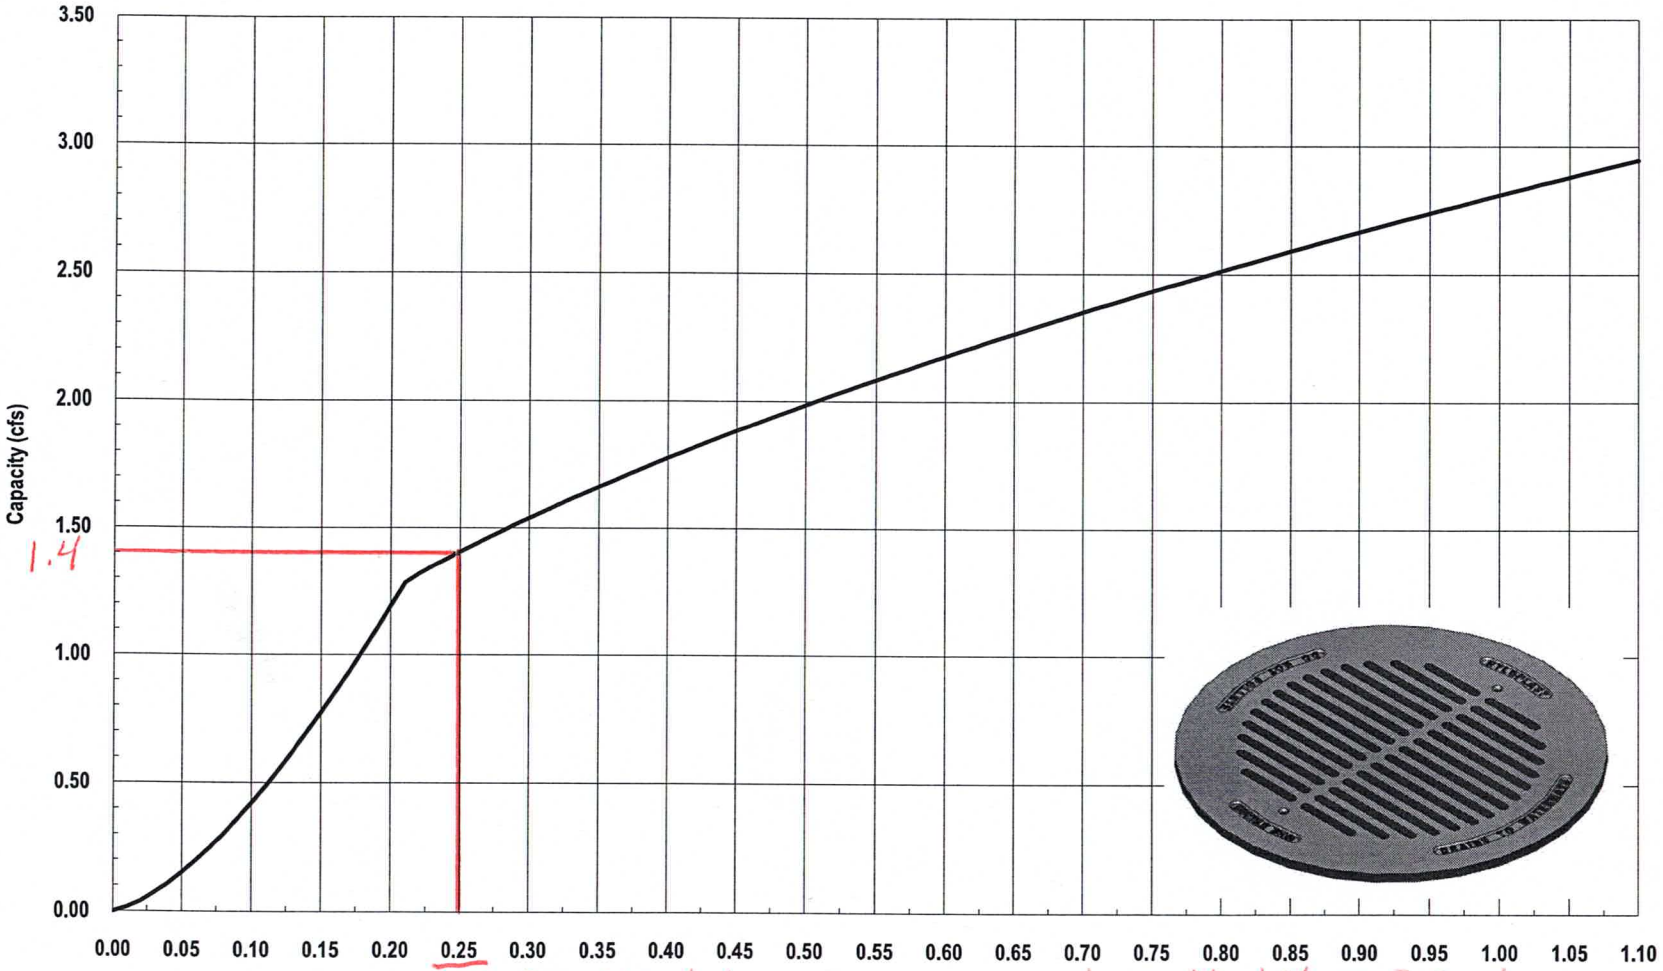

DP 33 Q_{100} = 2 cfs 4 inlets Capacity = 4 x 1.4 = 5.6 cfs
DP 34 Q_{100} = 2 cfs 3 inlets Capacity = 3 x 1.4 = 4.2 cfs
DP 31 Q_{100} = 2 cfs 2 inlets Capacity = 2 x 1.4 = 2.8 cfs
DP 32 Q_{100} = 3 cfs 3 inlets Capacity = 3 x 1.4 = 4.2 cfs

Nyloplast
3130 Verona Avenue • Buford, GA 30518
(866) 888-8479 / (770) 932-2443 • Fax: (770) 932-2490

© Nyloplast Inlet Capacity Charts June 2012

MDDP
PIPE CALCULATIONS

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator Download Spreadsheet Open Google Sheets version View All Spreadsheets

Pipe run 1

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	43	%

Results

Flow, Q	4.0349	cfs
Velocity, v	5.5533	ft/sec
Velocity head, h_v	0.4793	ft H2O
Flow area	0.7266	ft^2
Wetted perimeter	2.1455	ft
Hydraulic radius	0.3387	ft
Top width, T	1.4852	ft
Froude number, F	1.40	
Shear stress (tractive force), tau	0.2114	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 2

24" RCP @ 0.60%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	0.60	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	71.5	%

Results

Flow, Q (See notes)	15.0755	cfs
Velocity, v	6.2725	ft/sec
Velocity head, h_v	0.6115	ft H2O
Flow area	2.4035	ft^2
Wetted perimeter	4.0305	ft
Hydraulic radius	0.5963	ft
Top width, T	1.8056	ft
Froude number, F	0.96	
Average shear stress (tractive force), tau	0.2234	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator Download Spreadsheet Open Google Sheets version View All Spreadsheets

Pipe run 3

18" RCP @ 2.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	.013	
Pressure slope (possibly ? equal to pipe slope), S_0	2	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	52.3	%

Results

Flow, Q	8.0101	cfs
Velocity, v	8.5644	ft/sec
Velocity head, h_v	1.1400	ft H2O
Flow area	0.9353	ft^2
Wetted perimeter	2.4252	ft
Hydraulic radius	0.3857	ft
Top width, T	1.4984	ft
Froude number, F	1.91	
Shear stress (tractive force), tau	0.4815	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 4

18" RCP @ 1.9%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.9	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	74.1	%

Results

Flow, Q (See notes)	13.0159	cfs
Velocity, v	9.2707	ft/sec
Velocity head, h_v	1.3357	ft H2O
Flow area	1.4040	ft^2
Wetted perimeter	3.1106	ft
Hydraulic radius	0.4514	ft
Top width, T	1.3142	ft
Froude number, F	1.58	
Average shear stress (tractive force), tau	0.5354	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 5

24" RCP @ 1.5%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.5	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	65.1	%

Results

Flow, Q (See notes)	21.0015	cfs
Velocity, v	9.6986	ft/sec
Velocity head, h_v	1.4619	ft H2O
Flow area	2.1655	ft^2
Wetted perimeter	3.7551	ft
Hydraulic radius	0.5767	ft
Top width, T	1.9066	ft
Froude number, F	1.60	
Average shear stress (tractive force), tau	0.5400	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 6

36" RCP @ 0.7%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	0.7	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	57.5	%

Results

Flow, Q (See notes)	35.0885	cfs
Velocity, v	8.3413	ft/sec
Velocity head, h_v	1.0813	ft H2O
Flow area	4.2068	ft^2
Wetted perimeter	5.1640	ft
Hydraulic radius	0.8146	ft
Top width, T	2.9660	ft
Froude number, F	1.23	
Average shear stress (tractive force), tau	0.3560	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 7

36" RCP @ 0.74%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	0.74	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	70	%

Results

Flow, Q (See notes)	48.0328	cfs
Velocity, v	9.0887	ft/sec
Velocity head, h_v	1.2838	ft H2O
Flow area	5.2851	ft^2
Wetted perimeter	5.9469	ft
Hydraulic radius	0.8887	ft
Top width, T	2.7495	ft
Froude number, F	1.16	
Average shear stress (tractive force), tau	0.4106	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator Download Spreadsheet Open Google Sheets version View All Spreadsheets

Pipe run 8

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	65.4	%

Results

Flow, Q	8.0145	cfs
Velocity, v	6.5452	ft/sec
Velocity head, h_v	0.6658	ft H2O
Flow area	1.2245	ft^2
Wetted perimeter	2.8258	ft
Hydraulic radius	0.4333	ft
Top width, T	1.4271	ft
Froude number, F	1.25	
Shear stress (tractive force), tau	0.2705	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator Download Spreadsheet Open Google Sheets version View All Spreadsheets

Pipe run 9

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	65.4	%

Results

Flow, Q	8.0145	cfs
Velocity, v	6.5452	ft/sec
Velocity head, h_v	0.6658	ft H2O
Flow area	1.2245	ft^2
Wetted perimeter	2.8258	ft
Hydraulic radius	0.4333	ft
Top width, T	1.4271	ft
Froude number, F	1.25	
Shear stress (tractive force), tau	0.2705	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 10

24" RCP" @ 0.60%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	.6	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	75.1	%

Results

Flow, Q (See notes)	16.0022	cfs
Velocity, v	6.3230	ft/sec
Velocity head, h_v	0.6214	ft H2O
Flow area	2.5309	ft^2
Wetted perimeter	4.1934	ft
Hydraulic radius	0.6035	ft
Top width, T	1.7297	ft
Froude number, F	0.92	
Average shear stress (tractive force), tau	0.2261	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 10A

15" RCP @ 1.00%

Inputs

Pipe diameter, d_0	15	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	48	%

Results

Flow, Q (See notes)	3.0116	cfs
Velocity, v	5.1715	ft/sec
Velocity head, h_v	0.4157	ft H2O
Flow area	0.5824	ft^2
Wetted perimeter	1.9135	ft
Hydraulic radius	0.3043	ft
Top width, T	1.2490	ft
Froude number, F	1.34	
Average shear stress (tractive force), tau	0.1900	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 10B

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	60	%

Results

Flow, Q (See notes)	7.0566	cfs
Velocity, v	6.3743	ft/sec
Velocity head, h_v	0.6315	ft H2O
Flow area	1.1071	ft^2
Wetted perimeter	2.6582	ft
Hydraulic radius	0.4165	ft
Top width, T	1.4697	ft
Froude number, F	1.29	
Average shear stress (tractive force), tau	0.2600	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 10C

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	58.3	%

Results

Flow, Q (See notes)	14.5364	cfs
Velocity, v	7.6459	ft/sec
Velocity head, h_v	0.9086	ft H2O
Flow area	1.9013	ft^2
Wetted perimeter	3.4751	ft
Hydraulic radius	0.5471	ft
Top width, T	1.9722	ft
Froude number, F	1.37	
Average shear stress (tractive force), tau	0.3416	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 11

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	54.4	%

Results

Flow, Q (See notes)	13.0149	cfs
Velocity, v	7.4519	ft/sec
Velocity head, h_v	0.8631	ft H2O
Flow area	1.7466	ft^2
Wetted perimeter	3.3178	ft
Hydraulic radius	0.5264	ft
Top width, T	1.9922	ft
Froude number, F	1.40	
Average shear stress (tractive force), tau	0.3286	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 12

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	60	%

Results

Flow, Q (See notes)	7.0566	cfs
Velocity, v	6.3743	ft/sec
Velocity head, h_v	0.6315	ft H2O
Flow area	1.1071	ft^2
Wetted perimeter	2.6582	ft
Hydraulic radius	0.4165	ft
Top width, T	1.4697	ft
Froude number, F	1.29	
Average shear stress (tractive force), tau	0.2600	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 13

30" RCP @ 1.00%

Inputs

Pipe diameter, d_0	30	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	47.9	%

Results

Flow, Q (See notes)	19.0535	cfs
Velocity, v	8.2018	ft/sec
Velocity head, h_v	1.0455	ft H2O
Flow area	2.3232	ft^2
Wetted perimeter	3.8219	ft
Hydraulic radius	0.6078	ft
Top width, T	2.4978	ft
Froude number, F	1.50	
Average shear stress (tractive force), tau	0.3795	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 14

24" RCP" @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	46.6	%

Results

Flow, Q (See notes)	10.0183	cfs
Velocity, v	6.9821	ft/sec
Velocity head, h_v	0.7576	ft H2O
Flow area	1.4349	ft^2
Wetted perimeter	3.0055	ft
Hydraulic radius	0.4774	ft
Top width, T	1.9954	ft
Froude number, F	1.45	
Average shear stress (tractive force), tau	0.2981	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 15

36" RCP 1.00%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	48.9	%

Results

Flow, Q (See notes)	32.1044	cfs
Velocity, v	9.3457	ft/sec
Velocity head, h_v	1.3575	ft H2O
Flow area	3.4353	ft^2
Wetted perimeter	4.6463	ft
Hydraulic radius	0.7393	ft
Top width, T	2.9992	ft
Froude number, F	1.54	
Average shear stress (tractive force), tau	0.4616	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator [Download Spreadsheet] [Open Google Sheets version] [View All Spreadsheets]

Pipe run 16

18" RCP @ 17.80%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	.013	
Pressure slope (possibly ? equal to pipe slope), S_0	17.8	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	14.7	%

Results

Flow, Q	2.0660	cfs
Velocity, v	12.7995	ft/sec
Velocity head, h_v	2.5462	ft H2O
Flow area	0.1614	ft^2
Wetted perimeter	1.1804	ft
Hydraulic radius	0.1367	ft
Top width, T	1.0623	ft
Froude number, F	5.83	
Shear stress (tractive force), tau	1.5195	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 17

36" RCP @ 1.00%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	50.6	%

Results

Flow, Q (See notes)	34.0263	cfs
Velocity, v	9.4829	ft/sec
Velocity head, h_v	1.3976	ft H2O
Flow area	3.5883	ft^2
Wetted perimeter	4.7483	ft
Hydraulic radius	0.7557	ft
Top width, T	2.9998	ft
Froude number, F	1.53	
Average shear stress (tractive force), tau	0.4718	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 17A

18" RCP @ 1.92%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.92	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	85.9	%

Results

Flow, Q (See notes)	15.1111	cfs
Velocity, v	9.3558	ft/sec
Velocity head, h_v	1.3604	ft H2O
Flow area	1.6152	ft^2
Wetted perimeter	3.5575	ft
Hydraulic radius	0.4540	ft
Top width, T	1.0441	ft
Froude number, F	1.33	
Average shear stress (tractive force), tau	0.5442	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 18

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	62.2	%

Results

Flow, Q (See notes)	16.0460	cfs
Velocity, v	7.8127	ft/sec
Velocity head, h_v	0.9486	ft H2O
Flow area	2.0539	ft^2
Wetted perimeter	3.6345	ft
Hydraulic radius	0.5651	ft
Top width, T	1.9395	ft
Froude number, F	1.34	
Average shear stress (tractive force), tau	0.3528	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 19

18" RCP" @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.0	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	60	%

Results

Flow, Q (See notes)	7.0566	cfs
Velocity, v	6.3743	ft/sec
Velocity head, h_v	0.6315	ft H2O
Flow area	1.1071	ft^2
Wetted perimeter	2.6582	ft
Hydraulic radius	0.4165	ft
Top width, T	1.4697	ft
Froude number, F	1.29	
Average shear stress (tractive force), tau	0.2600	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 20

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	80	%

Results

Flow, Q (See notes)	22.1105	cfs
Velocity, v	8.2067	ft/sec
Velocity head, h_v	1.0467	ft H2O
Flow area	2.6943	ft^2
Wetted perimeter	4.4285	ft
Hydraulic radius	0.6084	ft
Top width, T	1.6000	ft
Froude number, F	1.12	
Average shear stress (tractive force), tau	0.3798	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 21

18" RCP" @ 2.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	2	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	77.3	%

Results

Flow, Q (See notes)	14.0127	cfs
Velocity, v	9.5603	ft/sec
Velocity head, h_v	1.4205	ft H2O
Flow area	1.4658	ft^2
Wetted perimeter	3.2225	ft
Hydraulic radius	0.4548	ft
Top width, T	1.2567	ft
Froude number, F	1.56	
Average shear stress (tractive force), tau	0.5679	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 22

30" RCP @ 1.85%

Inputs

Pipe diameter, d_0	30	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.85	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	58.5	%

Results

Flow, Q (See notes)	36.0404	cfs
Velocity, v	12.0821	ft/sec
Velocity head, h_v	2.2687	ft H2O
Flow area	2.9831	ft^2
Wetted perimeter	4.3540	ft
Hydraulic radius	0.6851	ft
Top width, T	2.4636	ft
Froude number, F	1.94	
Average shear stress (tractive force), tau	0.7913	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 23

24" RCP" @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.0	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	62.2	%

Results

Flow, Q (See notes)	16.0460	cfs
Velocity, v	7.8127	ft/sec
Velocity head, h_v	0.9486	ft H2O
Flow area	2.0539	ft^2
Wetted perimeter	3.6345	ft
Hydraulic radius	0.5651	ft
Top width, T	1.9395	ft
Froude number, F	1.34	
Average shear stress (tractive force), tau	0.3528	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 24

24" RCP" @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.0	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	62.2	%

Results

Flow, Q (See notes)	16.0460	cfs
Velocity, v	7.8127	ft/sec
Velocity head, h_v	0.9486	ft H2O
Flow area	2.0539	ft^2
Wetted perimeter	3.6345	ft
Hydraulic radius	0.5651	ft
Top width, T	1.9395	ft
Froude number, F	1.34	
Average shear stress (tractive force), tau	0.3528	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 25

30" RCP" @ 1.00%

Inputs

Pipe diameter, d_0	30	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.0	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	68	%

Results

Flow, Q (See notes)	33.0363	cfs
Velocity, v	9.2943	ft/sec
Velocity head, h_v	1.3426	ft H2O
Flow area	3.5546	ft^2
Wetted perimeter	4.8476	ft
Hydraulic radius	0.7332	ft
Top width, T	2.3324	ft
Froude number, F	1.33	
Average shear stress (tractive force), tau	0.4578	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 26

36" RCP @ 1.36%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.36	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	68.3	%

Results

Flow, Q (See notes)	63.0231	cfs
Velocity, v	12.2528	ft/sec
Velocity head, h_v	2.3333	ft H2O
Flow area	5.1438	ft^2
Wetted perimeter	5.8365	ft
Hydraulic radius	0.8813	ft
Top width, T	2.7918	ft
Froude number, F	1.59	
Average shear stress (tractive force), tau	0.7483	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator Download Spreadsheet Open Google Sheets version View All Spreadsheets

Pipe run 27

18" RCP @ 3.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	3.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	39.8	%

Results

Flow, Q	6.0746	cfs
Velocity, v	9.2649	ft/sec
Velocity head, h_v	1.3341	ft H2O
Flow area	0.6557	ft^2
Wetted perimeter	2.0480	ft
Hydraulic radius	0.3201	ft
Top width, T	1.4684	ft
Froude number, F	2.45	
Shear stress (tractive force), tau	0.5996	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Check out our spreadsheet version of this calculator Download Spreadsheet Open Google Sheets version View All Spreadsheets

Pipe run 28

18" RCP @ 3.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	3.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	43.1	%

Results

Flow, Q	7.0177	cfs
Velocity, v	9.6292	ft/sec
Velocity head, h_v	1.4411	ft H2O
Flow area	0.7288	ft^2
Wetted perimeter	2.1485	ft
Hydraulic radius	0.3392	ft
Top width, T	1.4856	ft
Froude number, F	2.42	
Shear stress (tractive force), tau	0.6353	psf



Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 29

36" RCP @ 1.67%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.67	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	70.7	%

Results

Flow, Q (See notes)	73.0952	cfs
Velocity, v	13.6820	ft/sec
Velocity head, h_v	2.9093	ft H2O
Flow area	5.3427	ft^2
Wetted perimeter	5.9929	ft
Hydraulic radius	0.8915	ft
Top width, T	2.7308	ft
Froude number, F	1.72	
Average shear stress (tractive force), tau	0.9294	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 30

24" RCP" @ 4.26%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	4.26	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	40.4	%

Results

Flow, Q (See notes)	16.0217	cfs
Velocity, v	13.4735	ft/sec
Velocity head, h_v	2.8214	ft H2O
Flow area	1.1892	ft^2
Wetted perimeter	2.7552	ft
Hydraulic radius	0.4316	ft
Top width, T	1.9628	ft
Froude number, F	3.05	
Average shear stress (tractive force), tau	1.1479	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 31

42" RCP @ 1.00%

Inputs

Pipe diameter, d_0	42	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	71.2	%

Results

Flow, Q (See notes)	86.0951	cfs
Velocity, v	11.7499	ft/sec
Velocity head, h_v	2.1457	ft H2O
Flow area	7.3276	ft^2
Wetted perimeter	7.0302	ft
Hydraulic radius	1.0423	ft
Top width, T	3.1698	ft
Froude number, F	1.36	
Average shear stress (tractive force), tau	0.6507	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 32

18" RCP" @ 11.70%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	11.70	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	30	%

Results

Flow, Q (See notes)	7.0356	cfs
Velocity, v	15.7797	ft/sec
Velocity head, h_v	3.8699	ft H2O
Flow area	0.4459	ft^2
Wetted perimeter	1.7389	ft
Hydraulic radius	0.2564	ft
Top width, T	1.3748	ft
Froude number, F	4.90	
Average shear stress (tractive force), tau	1.8729	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 33

42" RCP @ 1.00%

Inputs

Pipe diameter, d_0	42	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	75.2	%

Results

Flow, Q (See notes)	92.0184	cfs
Velocity, v	11.8563	ft/sec
Velocity head, h_v	2.1847	ft H2O
Flow area	7.7615	ft^2
Wetted perimeter	7.3465	ft
Hydraulic radius	1.0565	ft
Top width, T	3.0229	ft
Froude number, F	1.30	
Average shear stress (tractive force), tau	0.6595	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 34

24" RCP" @ 0.40%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	0.4	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	57.6	%

Results

Flow, Q (See notes)	9.0211	cfs
Velocity, v	4.8149	ft/sec
Velocity head, h_v	0.3603	ft H2O
Flow area	1.8736	ft^2
Wetted perimeter	3.4467	ft
Hydraulic radius	0.5436	ft
Top width, T	1.9767	ft
Froude number, F	0.87	
Average shear stress (tractive force), tau	0.1357	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 34A

30" RCP" @ 0.40%

Inputs

Pipe diameter, d_0	30	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	0.4	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	66	%

Results

Flow, Q (See notes)	20.0495	cfs
Velocity, v	5.8336	ft/sec
Velocity head, h_v	0.5289	ft H2O
Flow area	3.4371	ft^2
Wetted perimeter	4.7413	ft
Hydraulic radius	0.7249	ft
Top width, T	2.3685	ft
Froude number, F	0.85	
Average shear stress (tractive force), tau	0.1810	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 35

36" RCP @ 1.34%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.34	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	64.7	%

Results

Flow, Q (See notes)	58.0105	cfs
Velocity, v	11.9910	ft/sec
Velocity head, h_v	2.2347	ft H2O
Flow area	4.8380	ft^2
Wetted perimeter	5.6076	ft
Hydraulic radius	0.8627	ft
Top width, T	2.8674	ft
Froude number, F	1.63	
Average shear stress (tractive force), tau	0.7217	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 37

15" HDPE @ 1%

Inputs

Pipe diameter, d_0	15	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	48	%

Results

Flow, Q (See notes)	3.0116	cfs
Velocity, v	5.1715	ft/sec
Velocity head, h_v	0.4157	ft H2O
Flow area	0.5824	ft^2
Wetted perimeter	1.9135	ft
Hydraulic radius	0.3043	ft
Top width, T	1.2490	ft
Froude number, F	1.34	
Average shear stress (tractive force), tau	0.1900	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 38

15" HDPE @ 1%

Inputs

Pipe diameter, d_0	15	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	38.3	%

Results

Flow, Q (See notes)	2.0096	cfs
Velocity, v	4.6470	ft/sec
Velocity head, h_v	0.3356	ft H2O
Flow area	0.4325	ft^2
Wetted perimeter	1.6682	ft
Hydraulic radius	0.2592	ft
Top width, T	1.2153	ft
Froude number, F	1.37	
Average shear stress (tractive force), tau	0.1618	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 39

15" HDPE @ 1%

Inputs

Pipe diameter, d_0	15	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	38.3	%

Results

Flow, Q (See notes)	2.0096	cfs
Velocity, v	4.6470	ft/sec
Velocity head, h_v	0.3356	ft H2O
Flow area	0.4325	ft^2
Wetted perimeter	1.6682	ft
Hydraulic radius	0.2592	ft
Top width, T	1.2153	ft
Froude number, F	1.37	
Average shear stress (tractive force), tau	0.1618	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 40

15" HDPE @ 1%

Inputs

Pipe diameter, d_0	15	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	38.3	%

Results

Flow, Q (See notes)	2.0096	cfs
Velocity, v	4.6470	ft/sec
Velocity head, h_v	0.3356	ft H2O
Flow area	0.4325	ft^2
Wetted perimeter	1.6682	ft
Hydraulic radius	0.2592	ft
Top width, T	1.2153	ft
Froude number, F	1.37	
Average shear stress (tractive force), tau	0.1618	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

CULVERT STAGE-DISCHARGE SIZING (INLET vs. OUTLET CONTROL WITH TAILWATER EFFECTS)

Project: WATERBURY FILING 1
Basin ID: Design Point 11- Dual 42" RCP Culverts
Status:

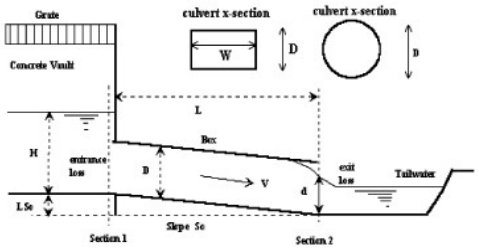

Design Information (Input):

Circular Culvert: Barrel Diameter in Inches — D = 42 inches
Inlet Edge Type (choose from pull-down list) — Grooved End Projection

OR:

Box Culvert: Barrel Height (Rise) in Feet — Height (Rise) = ft.
Barrel Width (Span) in Feet — Width (Span) = ft.
Inlet Edge Type (choose from pull-down list) — Square Edge w/ 90-15 Deg. Headwall

Number of Barrels	No =	2	
Inlet Elevation at Culvert Invert	Inlet Elev =	6935.82	ft. elev.
Outlet Elevation at Culvert Invert **OR** Slope of Culvert (ft v./ft h.)	Outlet Elev =	6934.18	ft. elev.
Culvert Length in Feet	L =	128	ft.
Manning's Roughness	n =	0.013	
Bend Loss Coefficient	K_b =	0	
Exit Loss Coefficient	K_x =	1	

Design Information (calculated):

Entrance Loss Coefficient	K_e =	0.20
Friction Loss Coefficient	K_f =	0.75
Sum of All Loss Coefficients	K_s =	1.95
Orifice Inlet Condition Coefficient	C_d =	0.95
Minimum Energy Condition Coefficient	KE_{low} =	-0.0310

Calculations of Culvert Capacity (output):

Water Surface Elevation (ft., linked)	Tailwater Surface Elevation ft	Culvert Inlet-Control Flowrate cfs	Culvert Outlet-Control Flowrate cfs	Controlling Culvert Flowrate cfs (output)	Inlet Equation Used:	Flow Control Used
6939.32		113.80	142.47	**113.80**	Regression Eqn.	INLET
6939.57		125.60	152.60	**125.60**	Regression Eqn.	INLET
6939.82		136.80	162.28	**136.80**	Regression Eqn.	INLET
6940.07		147.20	171.28	**147.20**	Regression Eqn.	INLET
6940.32		157.00	180.05	**157.00**	Regression Eqn.	INLET
6940.57		166.20	188.25	**166.20**	Regression Eqn.	INLET
6940.82		175.00	196.11	**175.00**	Regression Eqn.	INLET
6941.07		183.20	203.85	**183.20**	Regression Eqn.	INLET
6941.32		191.00	211.14	**191.00**	Regression Eqn.	INLET
6941.57		198.60	218.20	**198.60**	Regression Eqn.	INLET
6941.82		205.80	225.15	**205.80**	Regression Eqn.	INLET
6942.07		212.60	231.86	**212.60**	Regression Eqn.	INLET
6942.32		219.40	238.36	**219.40**	Regression Eqn.	INLET
6942.57		225.80	244.62	**225.80**	Regression Eqn.	INLET
6942.82		232.00	250.88	**232.00**	Regression Eqn.	INLET
6943.07		238.20	256.81	**238.20**	Regression Eqn.	INLET
6943.32		244.20	262.73	**244.20**	Regression Eqn.	INLET
6943.57		250.00	268.42	**250.00**	Regression Eqn.	INLET
6943.82		255.60	274.12	**255.60**	Regression Eqn.	INLET
6944.07		261.20	279.58	**261.20**	Regression Eqn.	INLET
6944.32		266.60	285.05	**266.60**	Regression Eqn.	INLET
6944.57		272.00	290.40	**272.00**	Regression Eqn.	INLET
6944.82		277.20	295.64	**277.20**	Regression Eqn.	INLET
6945.07		282.40	300.76	**282.40**	Regression Eqn.	INLET
6945.32		287.40	305.77	**287.40**	Regression Eqn.	INLET
6945.57		292.40	310.67	**292.40**	Regression Eqn.	INLET
6945.82		297.40	315.57	**297.40**	Regression Eqn.	INLET
6946.07		302.20	320.35	**302.20**	Regression Eqn.	INLET
6946.32		307.00	325.13	**307.00**	Regression Eqn.	INLET
6946.57		311.40	329.80	**311.40**	Orifice Eqn.	INLET

Processing Time: 27.79 Seconds

CULVERT STAGE-DISCHARGE SIZING (INLET vs. OUTLET CONTROL WITH TAILWATER EFFECTS)

Project: WATERBURY FILING 1
Basin ID: Design Point 11- Dual 42" RCP Culverts

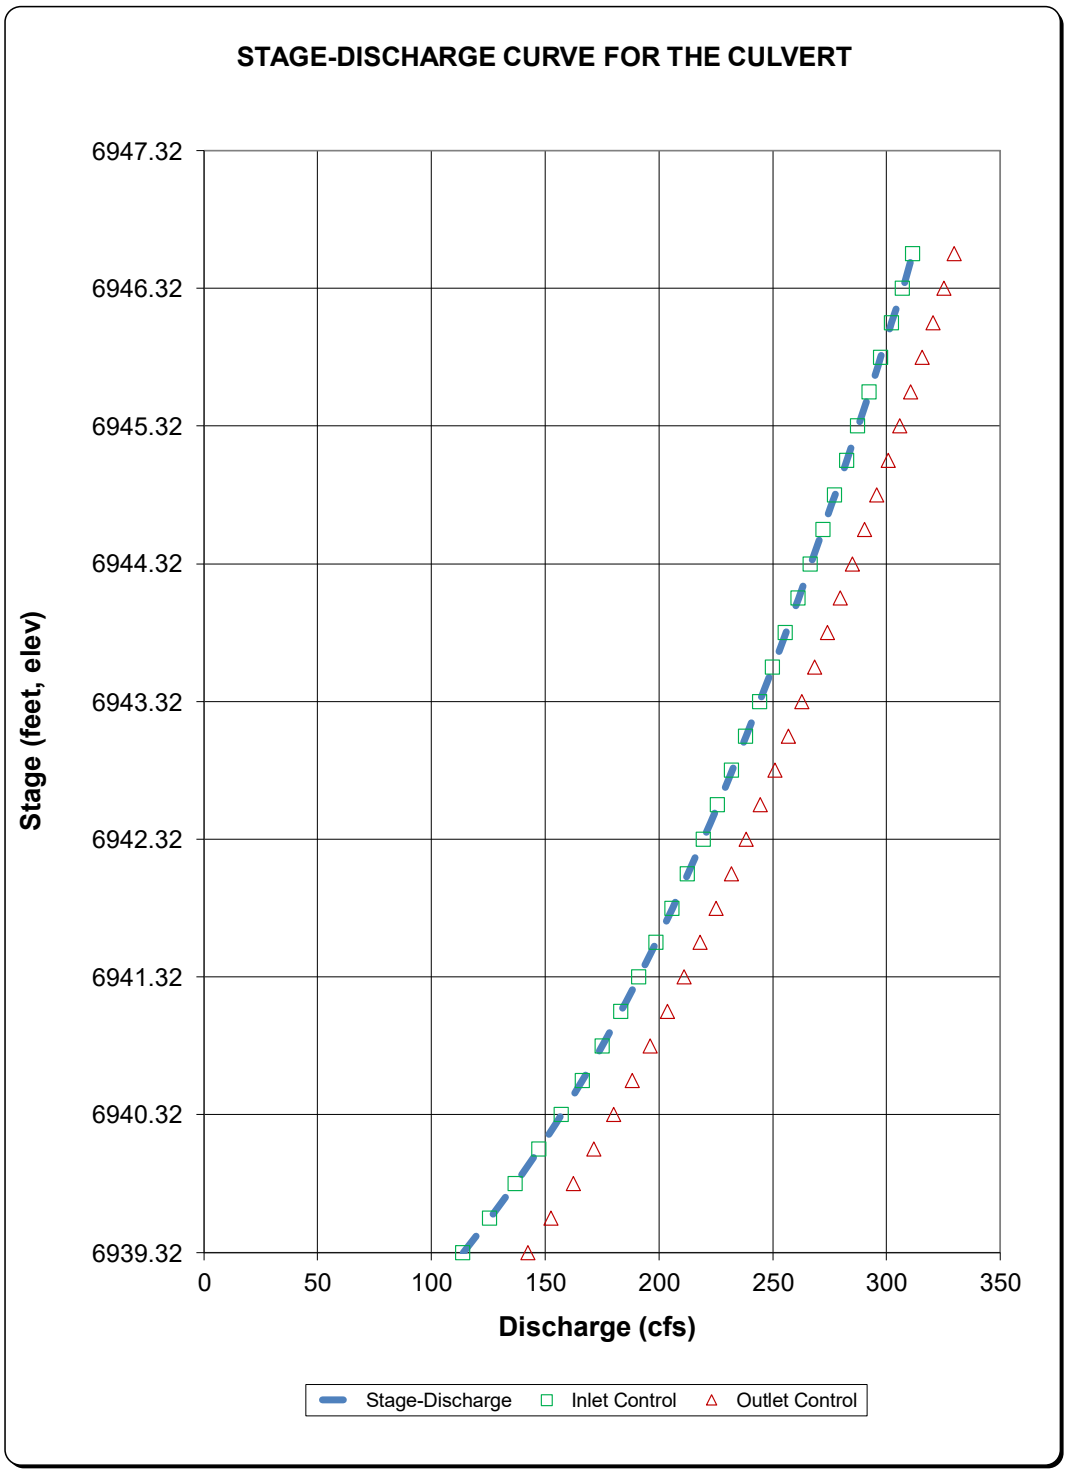

Determination of Culvert Headwater and Outlet Protection

Project: WATERBURY FILING 1

Basin ID: Design Point 11- Dual 42" RCP Culverts

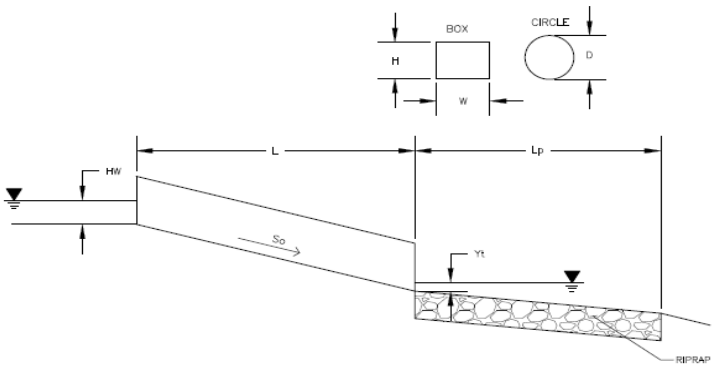

Soil Type:
Choose One:
- (•) Sandy
- ( ) Non-Sandy

Supercritical Flow! Using Da to calculate protection type.

Design Information (Input):

Design Discharge	Q =	216	cfs
Circular Culvert:			
Barrel Diameter in Inches	D =	42	inches
Inlet Edge Type (Choose from pull-down list)		Grooved End Projection	
Box Culvert:		**OR**	
Barrel Height (Rise) in Feet	Height (Rise) =		ft
Barrel Width (Span) in Feet	Width (Span) =		ft
Inlet Edge Type (Choose from pull-down list)			
Number of Barrels	No =	2	
Inlet Elevation	Elev IN =	6935.82	ft
Outlet Elevation **OR** Slope	Elev OUT =	6934.18	ft
Culvert Length	L =	128	ft
Manning's Roughness	n =	0.013	
Bend Loss Coefficient	k_b =	0	
Exit Loss Coefficient	k_x =	1	
Tailwater Surface Elevation	Elev Y_t =		ft
Max Allowable Channel Velocity	V =	5	ft/s

Required Protection (Output):

Tailwater Surface Height	Y_t =	1.40	ft
Flow Area at Max Channel Velocity	A_t =	21.64	ft^2
Culvert Cross Sectional Area Available	A =	9.62	ft^2
Entrance Loss Coefficient	k_e =	0.20	
Friction Loss Coefficient	k_f =	0.75	
Sum of All Losses Coefficients	k_s =	1.95	ft
Culvert Normal Depth	Y_n =	2.72	ft
Culvert Critical Depth	Y_c =	3.15	ft
Tailwater Depth for Design	d =	3.33	ft
Adjusted Diameter **OR** Adjusted Rise	D_a =	3.11	ft
Expansion Factor	1/(2*tan(Θ)) =	3.27	
Flow/Diameter$^{2.5}$ **OR** Flow/(Span * Rise$^{1.5}$)	Q/D^2.5 =	4.72	$ft^{0.5}/s$
Froude Number	Fr =	1.44	**Supercritical!**
Tailwater/Adjusted Diameter **OR** Tailwater/Adjusted Rise	Yt/D =	0.45	
Inlet Control Headwater	HW_I =	6.39	ft
Outlet Control Headwater	HW_O =	5.52	
Design Headwater Elevation	**HW =**	**6,942.21**	**ft**
Headwater/Diameter OR Headwater/Rise Ratio	**HW/D =**	**1.83**	**HW/D > 1.5!**
Minimum Theoretical Riprap Size	d_{50} =	14	in
Nominal Riprap Size	d_{50} =	18	in
UDFCD Riprap Type	**Type =**	**H**	
Length of Protection	**L_p =**	**35**	**ft**
Width of Protection	**T =**	**15**	**ft**

CULVERT STAGE-DISCHARGE SIZING (INLET vs. OUTLET CONTROL WITH TAILWATER EFFECTS)

Project: WATERBURY FILING 1
Basin ID: Design Point 12- 18" RCP Culvert
Status:

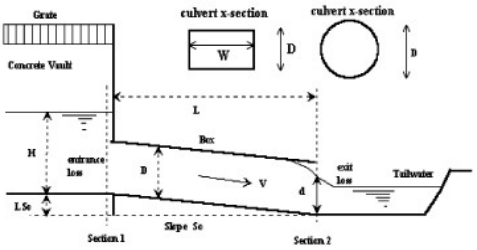

Design Information (Input):

Circular Culvert: Barrel Diameter in Inches — D = 18 inches
Inlet Edge Type (choose from pull-down list) — Grooved End Projection

OR:

Box Culvert: Barrel Height (Rise) in Feet — Height (Rise) = ft.
Barrel Width (Span) in Feet — Width (Span) = ft.
Inlet Edge Type (choose from pull-down list) — Square Edge w/ 90-15 Deg. Headwall

Number of Barrels	No =	1	
Inlet Elevation at Culvert Invert	Inlet Elev =	6940.52	ft. elev.
Outlet Elevation at Culvert Invert **OR** Slope of Culvert (ft v./ft h.)	Outlet Elev =	6934.07	ft. elev.
Culvert Length in Feet	L =	100	ft.
Manning's Roughness	n =	0.013	
Bend Loss Coefficient	K_b =	0	
Exit Loss Coefficient	K_x =	1	

Design Information (calculated):

Entrance Loss Coefficient	K_e =	0.20
Friction Loss Coefficient	K_f =	1.81
Sum of All Loss Coefficients	K_s =	3.01
Orifice Inlet Condition Coefficient	C_d =	0.96
Minimum Energy Condition Coefficient	KE_{low} =	-0.2582

Calculations of Culvert Capacity (output):

Water Surface Elevation (ft., linked)	Tailwater Surface Elevation ft	Culvert Inlet-Control Flowrate cfs	Culvert Outlet-Control Flowrate cfs	Controlling Culvert Flowrate cfs (output)	Inlet Equation Used:	Flow Control Used
6942.02		7.20	20.76	**7.20**	Regression Eqn.	INLET
6942.27		8.70	21.16	**8.70**	Regression Eqn.	INLET
6942.52		10.10	21.54	**10.10**	Regression Eqn.	INLET
6942.77		11.20	21.93	**11.20**	Regression Eqn.	INLET
6943.02		12.30	22.32	**12.30**	Regression Eqn.	INLET
6943.27		13.20	22.68	**13.20**	Regression Eqn.	INLET
6943.52		14.10	23.05	**14.10**	Regression Eqn.	INLET
6943.77		15.00	23.41	**15.00**	Regression Eqn.	INLET
6944.02		15.80	23.76	**15.80**	Regression Eqn.	INLET
6944.27		16.50	24.10	**16.50**	Regression Eqn.	INLET
6944.52		17.20	24.45	**17.20**	Regression Eqn.	INLET
6944.77		17.90	24.80	**17.90**	Regression Eqn.	INLET
6945.02		18.60	25.13	**18.60**	Regression Eqn.	INLET
6945.27		19.30	25.45	**19.30**	Orifice Eqn.	INLET
6945.52		19.90	25.78	**19.90**	Orifice Eqn.	INLET
6945.77		20.40	26.10	**20.40**	Orifice Eqn.	INLET
6946.02		21.00	26.42	**21.00**	Orifice Eqn.	INLET
6946.27		21.50	26.73	**21.50**	Orifice Eqn.	INLET
6946.52		22.10	27.05	**22.10**	Orifice Eqn.	INLET
6946.77		22.60	27.36	**22.60**	Orifice Eqn.	INLET
6947.02		23.10	27.65	**23.10**	Orifice Eqn.	INLET
6947.27		23.60	27.96	**23.60**	Orifice Eqn.	INLET
6947.52		24.10	28.25	**24.10**	Orifice Eqn.	INLET
6947.77		24.50	28.55	**24.50**	Orifice Eqn.	INLET
6948.02		25.00	28.84	**25.00**	Orifice Eqn.	INLET
6948.27		25.50	29.13	**25.50**	Orifice Eqn.	INLET
6948.52		25.90	29.41	**25.90**	Orifice Eqn.	INLET
6948.77		26.40	29.69	**26.40**	Orifice Eqn.	INLET
6949.02		26.80	29.97	**26.80**	Orifice Eqn.	INLET
6949.27		27.20	30.25	**27.20**	Orifice Eqn.	INLET

Processing Time: 26.66 Seconds

CULVERT STAGE-DISCHARGE SIZING (INLET vs. OUTLET CONTROL WITH TAILWATER EFFECTS)

Project: WATERBURY FILING 1
Basin ID: Design Point 12- 18" RCP Culvert

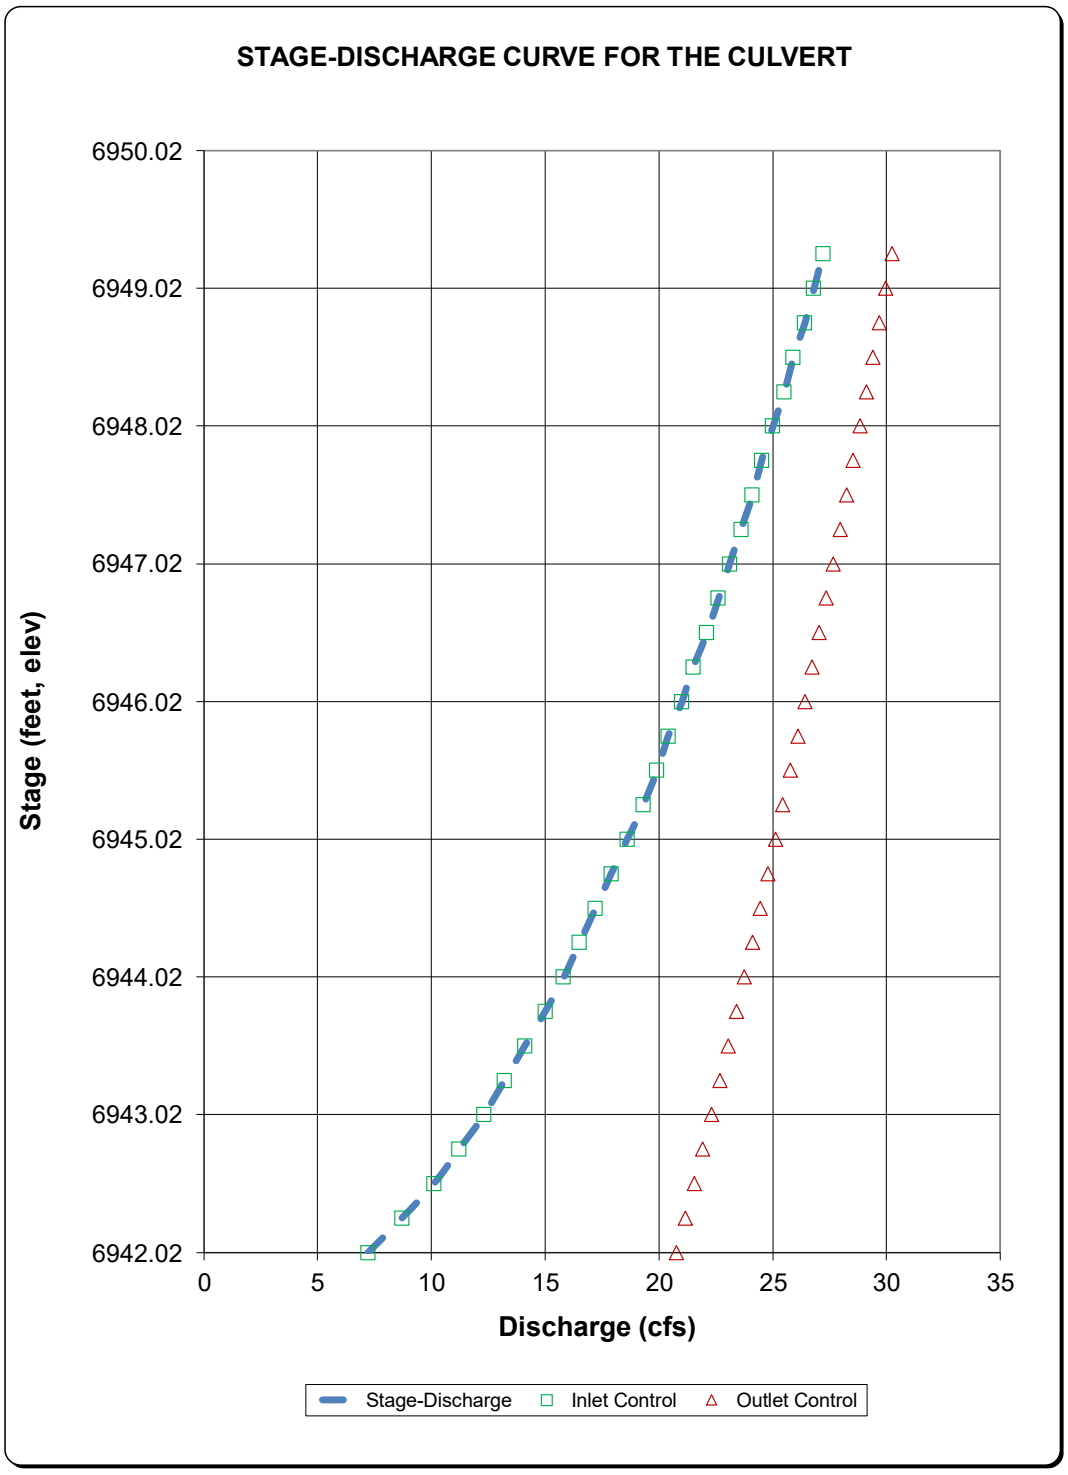

Determination of Culvert Headwater and Outlet Protection

Project: WATERBURY FILING 1

Basin ID: Design Point 12- 18" RCP Culvert

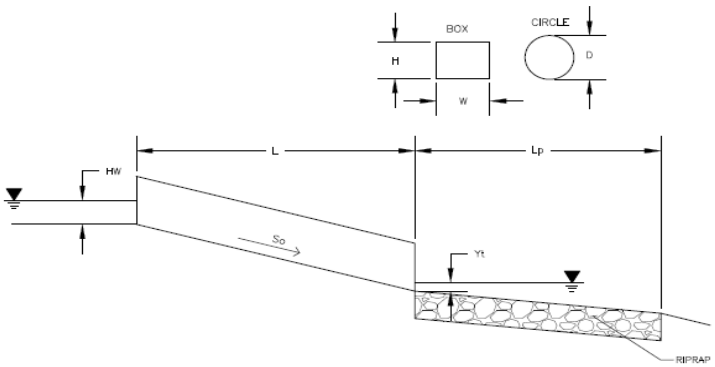

Soil Type:
Choose One:
- (•) Sandy
- ( ) Non-Sandy

Supercritical Flow! Using Da to calculate protection type.

Design Information (Input):

	Design Discharge	Q =	4	cfs
Circular Culvert:				
	Barrel Diameter in Inches	D =	18	inches
	Inlet Edge Type (Choose from pull-down list)		Grooved End Projection	
Box Culvert:			**OR**	
	Barrel Height (Rise) in Feet	Height (Rise) =		ft
	Barrel Width (Span) in Feet	Width (Span) =		ft
	Inlet Edge Type (Choose from pull-down list)			
	Number of Barrels	No =	1	
	Inlet Elevation	Elev IN =	6940.52	ft
	Outlet Elevation **OR** Slope	Elev OUT =	6934.07	ft
	Culvert Length	L =	100	ft
	Manning's Roughness	n =	0.013	
	Bend Loss Coefficient	k_b =	0	
	Exit Loss Coefficient	k_x =	1	
	Tailwater Surface Elevation	Elev Y_t =		ft
	Max Allowable Channel Velocity	V =	5	ft/s

Required Protection (Output):

Tailwater Surface Height	Y_t =	0.60	ft
Flow Area at Max Channel Velocity	A_t =	0.88	ft^2
Culvert Cross Sectional Area Available	A =	1.77	ft^2
Entrance Loss Coefficient	k_e =	0.20	
Friction Loss Coefficient	k_f =	1.81	
Sum of All Losses Coefficients	k_s =	3.01	ft
Culvert Normal Depth	Y_n =	0.41	ft
Culvert Critical Depth	Y_c =	0.80	ft
Tailwater Depth for Design	d =	1.15	ft
Adjusted Diameter **OR** Adjusted Rise	D_a =	0.96	ft
Expansion Factor	1/(2*tan(Θ)) =	6.70	
Flow/Diameter$^{2.5}$ **OR** Flow/(Span * Rise$^{1.5}$)	Q/D^2.5 =	1.60	$ft^{0.5}/s$
Froude Number	Fr =	3.63	**Supercritical!**
Tailwater/Adjusted Diameter **OR** Tailwater/Adjusted Rise	Yt/D =	0.63	
Inlet Control Headwater	HW_I =	1.11	ft
Outlet Control Headwater	HW_O =	-5.01	
Design Headwater Elevation	**HW =**	**6,941.63**	**ft**
Headwater/Diameter OR Headwater/Rise Ratio	**HW/D =**	**0.74**	
Minimum Theoretical Riprap Size	d_{50} =	2	in
Nominal Riprap Size	d_{50} =	6	in
UDFCD Riprap Type	**Type =**	**VL**	
Length of Protection	**L_p =**	**5**	**ft**
Width of Protection	**T =**	**3**	**ft**

CULVERT STAGE-DISCHARGE SIZING (INLET vs. OUTLET CONTROL WITH TAILWATER EFFECTS)

Project: WATERBURY FILING 1
Basin ID: Design Point 30- Triple 36" RCP Culverts
Status:

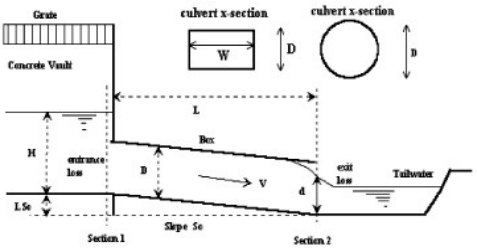

Design Information (Input):

Circular Culvert: Barrel Diameter in Inches — D = 36 inches
Inlet Edge Type (choose from pull-down list) — Grooved End Projection

OR:

Box Culvert: Barrel Height (Rise) in Feet — Height (Rise) = ft.
Barrel Width (Span) in Feet — Width (Span) = ft.
Inlet Edge Type (choose from pull-down list) — Square Edge w/ 90-15 Deg. Headwall

Number of Barrels	No =	3	
Inlet Elevation at Culvert Invert	Inlet Elev =	6920	ft. elev.
Outlet Elevation at Culvert Invert **OR** Slope of Culvert (ft v./ft h.)	Outlet Elev =	6919	ft. elev.
Culvert Length in Feet	L =	130	ft.
Manning's Roughness	n =	0.013	
Bend Loss Coefficient	K_b =	0	
Exit Loss Coefficient	K_x =	1	

Design Information (calculated):

Entrance Loss Coefficient	K_e =	0.20
Friction Loss Coefficient	K_f =	0.93
Sum of All Loss Coefficients	K_s =	2.13
Orifice Inlet Condition Coefficient	C_d =	0.95
Minimum Energy Condition Coefficient	KE_{low} =	-0.0132

Calculations of Culvert Capacity (output):

Water Surface Elevation (ft., linked)	Tailwater Surface Elevation ft	Culvert Inlet-Control Flowrate cfs	Culvert Outlet-Control Flowrate cfs	Controlling Culvert Flowrate cfs (output)	Inlet Equation Used:	Flow Control Used
6920.00		0.00	0.00	**0.00**	No Flow (WS < inlet)	N/A
6920.25		0.90	65.46	**0.90**	Min. Energy. Eqn.	INLET
6920.50		3.60	66.25	**3.60**	Min. Energy. Eqn.	INLET
6920.75		9.90	67.92	**9.90**	Min. Energy. Eqn.	INLET
6921.00		16.80	70.46	**16.80**	Min. Energy. Eqn.	INLET
6921.25		25.80	74.06	**25.80**	Min. Energy. Eqn.	INLET
6921.50		36.00	78.71	**36.00**	Min. Energy. Eqn.	INLET
6921.75		46.50	84.33	**46.50**	Regression Eqn.	INLET
6922.00		58.50	90.82	**58.50**	Regression Eqn.	INLET
6922.25		71.70	97.66	**71.70**	Regression Eqn.	INLET
6922.50		86.10	104.77	**86.10**	Regression Eqn.	INLET
6922.75		101.10	111.79	**101.10**	Regression Eqn.	INLET
6923.00		115.80	118.55	**115.80**	Regression Eqn.	INLET
6923.25		129.90	131.45	**129.90**	Regression Eqn.	INLET
6923.50		142.80	143.38	**142.80**	Regression Eqn.	INLET
6923.75		155.10	154.08	**154.08**	Regression Eqn.	OUTLET
6924.00		166.20	164.79	**164.79**	Regression Eqn.	OUTLET
6924.25		176.70	174.79	**174.79**	Regression Eqn.	OUTLET
6924.50		186.60	184.18	**184.18**	Regression Eqn.	OUTLET
6924.75		195.90	193.22	**193.22**	Regression Eqn.	OUTLET
6925.00		204.90	201.82	**201.82**	Regression Eqn.	OUTLET
6925.25		213.30	209.98	**209.98**	Regression Eqn.	OUTLET
6925.50		221.40	217.97	**217.97**	Regression Eqn.	OUTLET
6925.75		229.20	225.60	**225.60**	Regression Eqn.	OUTLET
6926.00		236.70	232.97	**232.97**	Regression Eqn.	OUTLET
6926.25		243.90	240.17	**240.17**	Regression Eqn.	OUTLET
6926.50		250.80	247.10	**247.10**	Regression Eqn.	OUTLET
6926.75		257.70	253.85	**253.85**	Regression Eqn.	OUTLET
6927.00		264.30	260.52	**260.52**	Regression Eqn.	OUTLET
6927.25		270.90	266.93	**266.93**	Regression Eqn.	OUTLET

Processing Time: 00.91 Seconds

CULVERT STAGE-DISCHARGE SIZING (INLET vs. OUTLET CONTROL WITH TAILWATER EFFECTS)

Project: WATERBURY FILING 1
Basin ID: Design Point 30- Triple 36" RCP Culverts

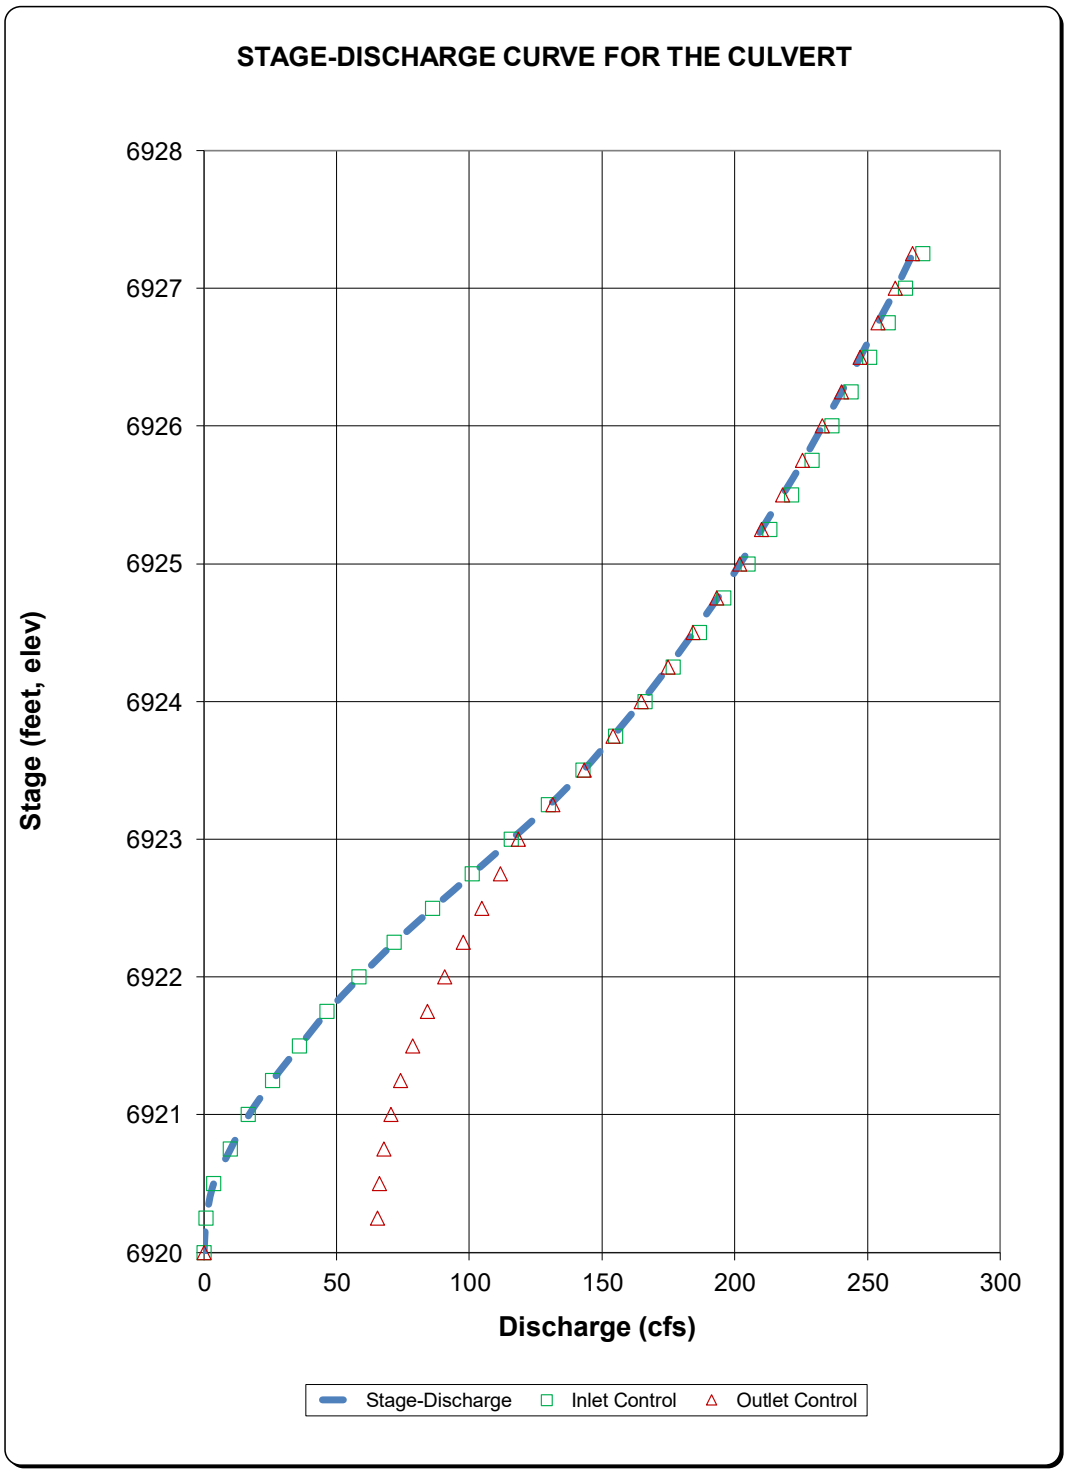

Determination of Culvert Headwater and Outlet Protection

Project: WATERBURY FILING 1

Basin ID: Design Point 30- Triple 36" RCP Culverts

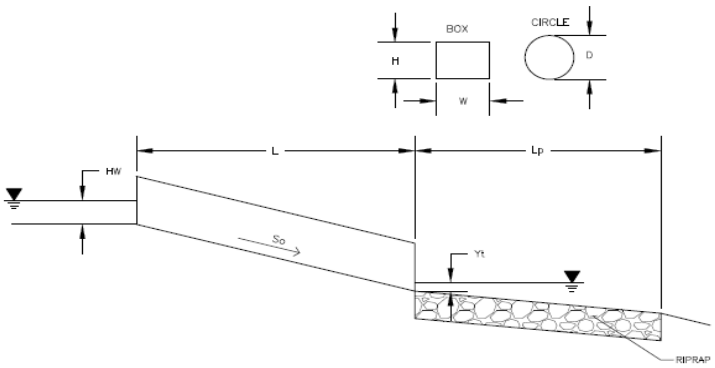

Soil Type:
Choose One:
(•) Sandy
( ) Non-Sandy

Design Information (Input):

Design Discharge	Q =	247	cfs
Circular Culvert:			
Barrel Diameter in Inches	D =	36	inches
Inlet Edge Type (Choose from pull-down list)		Grooved End Projection	
Box Culvert:		**OR**	
Barrel Height (Rise) in Feet	Height (Rise) =		ft
Barrel Width (Span) in Feet	Width (Span) =		ft
Inlet Edge Type (Choose from pull-down list)			
Number of Barrels	No =	3	
Inlet Elevation	Elev IN =	6920	ft
Outlet Elevation **OR** Slope	Elev OUT =	6919	ft
Culvert Length	L =	133.5	ft
Manning's Roughness	n =	0.013	
Bend Loss Coefficient	k_b =	0	
Exit Loss Coefficient	k_x =	1	
Tailwater Surface Elevation	Elev Y_t =	6920	ft
Max Allowable Channel Velocity	V =	5	ft/s

Required Protection (Output):

Tailwater Surface Height	Y_t =	1.00	ft
Flow Area at Max Channel Velocity	A_t =	16.48	ft^2
Culvert Cross Sectional Area Available	A =	7.07	ft^2
Entrance Loss Coefficient	k_e =	0.20	
Friction Loss Coefficient	k_f =	0.96	
Sum of All Losses Coefficients	k_s =	2.16	ft
Culvert Normal Depth	Y_n =	1.64	ft
Culvert Critical Depth	Y_c =	2.79	ft
Tailwater Depth for Design	d =	2.90	ft
Adjusted Diameter **OR** Adjusted Rise	D_a =	-	ft
Expansion Factor	1/(2*tan(Θ)) =	1.69	
Flow/Diameter$^{2.5}$ **OR** Flow/(Span * Rise$^{1.5}$)	Q/D^2.5 =	5.29	$ft^{0.5}/s$
Froude Number	Fr =	-	**Pressure flow!**
Tailwater/Adjusted Diameter **OR** Tailwater/Adjusted Rise	Yt/D =	0.33	
Inlet Control Headwater	HW_I =	6.37	ft
Outlet Control Headwater	HW_O =	6.45	
Design Headwater Elevation	**HW =**	**6,926.45**	**ft**
Headwater/Diameter OR Headwater/Rise Ratio	**HW/D =**	**2.15**	**HW/D > 1.5!**
Minimum Theoretical Riprap Size	d_{50} =	16	in
Nominal Riprap Size	d_{50} =	18	in
UDFCD Riprap Type	**Type =**	**H**	
Length of Protection	**L_p =**	**23**	**ft**
Width of Protection	**T =**	**17**	**ft**

PDR
INLET CALCULATIONS

Figure 8-11. Inlet Capacity Chart Sump Conditions , Curb Opening (Type R) Inlet

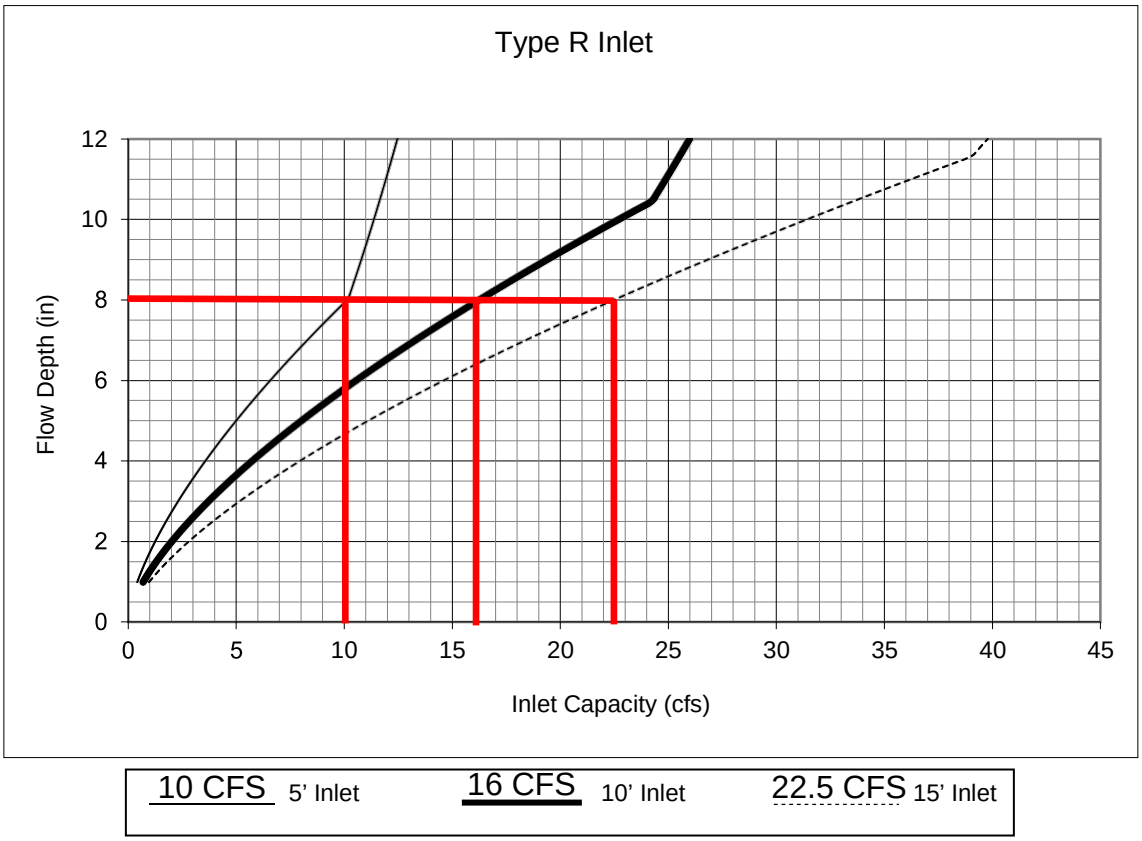

DP19: Q100=6 CFS ---> 10' INLET
DP20: Q100=5 CFS ---> 5' INLET
DP22: Q100=7 CFS ---> 5' INLET
DP23: Q100=1 CFS ---> 10' INLET
DP24: Q100=6 CFS ---> 10' INLET
DP25: Q100=5 CFS ---> 5' INLET
DP26: Q100=16 CFS ---> 10' INLET
DP27: Q100=7 CFS ---> 10' INLET
DP28: Q100=18/2 CFS --->2-10' INLETS

Notes:
1. The standard inlet parameters must apply to use this chart.

PDR

DP21 10' Type R At-Grade
Q5 = 2 cfs Q100 = 6 cfs
Muddy Pond Slope = 1.75%

Figure 8-7. Inlet Capacity Chart Continuous Grade Conditions, Residential (Local)
(Attached and Detached Sidewalk)

Street Section Data: Street Width Flowline to Flowline = 34'
Type of Curb and Gutter: D-10-R = 8" vertical
Type 16 = 6" vertical

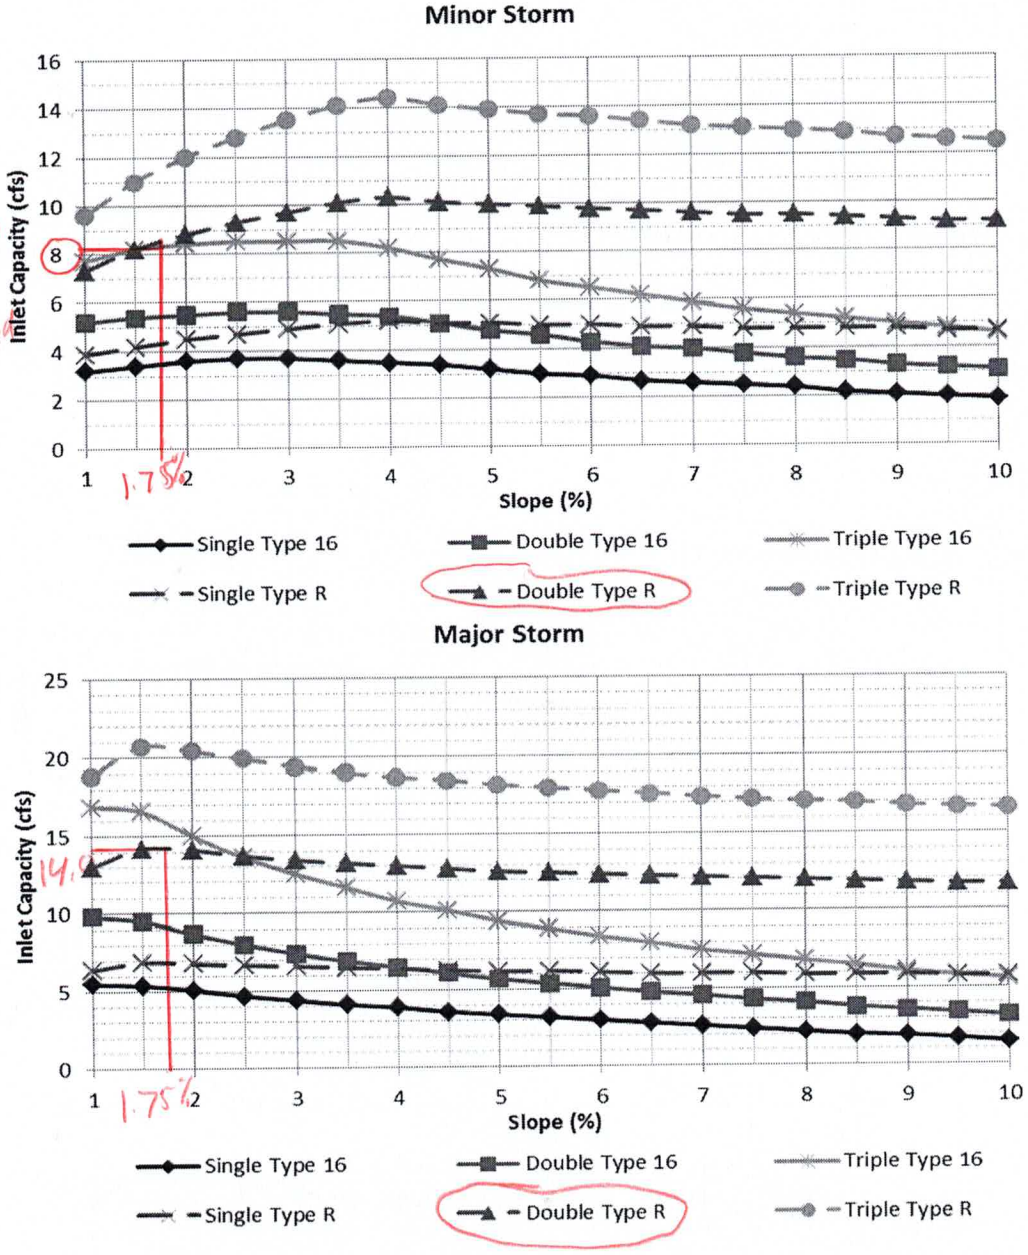

8 cfs ≥ 2 cfs
ok
Fully Captured

14 cfs ≥ 6 cfs
ok
Fully Captured

The standard street section parameters as defined in Chapter 7 must apply to use these charts. For non-standard sections, the inlet capacity shall be calculated using the UDFCD spreadsheets. The maximum spread width is limited by the curb height based on no curb overtopping during a minor storm and flow being contained within the public right-of-way during the major storm. Calculations were done using UD-Inlet 3.00.xls, Mar., 2011 with the default clogging factors.

PDR
PIPE CALCULATIONS

MANNING'S EQUATION for OPEN CHANNEL FLOW

Project:	**WATERBURY 1&2 MDP/PDR**	Location:	DP-PRE5 DIVERSIONS SWALE E-E	
By:	QNA	Date:	7/14/2022	
Chk By:		Date:		version 12-2004

Mannings Formula

$Q = (1.486/n)AR_h^{2/3}S^{1/2}$

R = A/P

A = cross sectional area

P= wetted perimeter

S = slope of channel

n = Manning's roughness coefficient

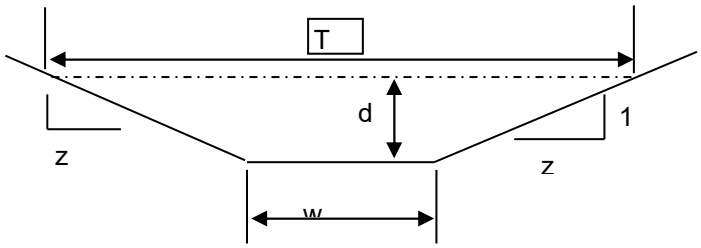

$V = (1.49/n)R_h^{2/3}S^{1/2}$

Q = V x A

INPUT	
z (sideslope)=	5
z (sideslope)=	5
b (btm width, ft)=	8
d (depth, ft)=	0.72
S (slope, ft/ft)	0.02
n_{low} =	0.025
n_{high} =	0.035

Clear Data Entry Cells

				Low N		High N			
Depth, ft	Area, sf	Wetted Perimeter, ft	Hydraulic Radius, ft	Velocity, fps	Flow, cfs	Velocity, fps	Flow, cfs		
0.72	8.35	15.34	0.54	5.60419065	46.8062	4.002993	33.433	T =	15.2
								Dm =	0.549
				Sc low =	0.0112	Sc high =	0.0220		
				.7 Sc	1.3 Sc	.7 Sc	1.3 Sc		
				0.0079	0.0146	0.0154	0.0287		

s_c = critical slope ft / ft

T = top width of the stream

d_m = a/T = mean depth of flow

Created by: Mike O'Shea

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 18 PDR

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	35.2	%

Results

Flow, Q (See notes)	6.0119	cfs
Velocity, v	6.0879	ft/sec
Velocity head, h_v	0.5760	ft H2O
Flow area	0.9876	ft^2
Wetted perimeter	2.5406	ft
Hydraulic radius	0.3887	ft
Top width, T	1.9104	ft
Froude number, F	1.49	
Average shear stress (tractive force), tau	0.2427	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 19 PDR

18" RCP @ 1.0%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	48.8	%

Results

Flow, Q (See notes)	5.0384	cfs
Velocity, v	5.8822	ft/sec
Velocity head, h_v	0.5378	ft H2O
Flow area	0.8566	ft^2
Wetted perimeter	2.3202	ft
Hydraulic radius	0.3692	ft
Top width, T	1.4996	ft
Froude number, F	1.37	
Average shear stress (tractive force), tau	0.2305	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 20 PDR

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	46.6	%

Results

Flow, Q (See notes)	10.0183	cfs
Velocity, v	6.9821	ft/sec
Velocity head, h_v	0.7576	ft H2O
Flow area	1.4349	ft^2
Wetted perimeter	3.0055	ft
Hydraulic radius	0.4774	ft
Top width, T	1.9954	ft
Froude number, F	1.45	
Average shear stress (tractive force), tau	0.2981	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 21 PDR

18" RCP @ 2.0%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	2.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	44.3	%

Results

Flow, Q (See notes)	6.0176	cfs
Velocity, v	7.9643	ft/sec
Velocity head, h_v	0.9858	ft H2O
Flow area	0.7556	ft^2
Wetted perimeter	2.1848	ft
Hydraulic radius	0.3458	ft
Top width, T	1.4902	ft
Froude number, F	1.97	
Average shear stress (tractive force), tau	0.4318	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 22 PDR

30" RCP @ 1.85%

Inputs

Pipe diameter, d_0	30	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.85	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	35.5	%

Results

Flow, Q (See notes)	15.0647	cfs
Velocity, v	9.6511	ft/sec
Velocity head, h_v	1.4476	ft H2O
Flow area	1.5610	ft^2
Wetted perimeter	3.1914	ft
Hydraulic radius	0.4891	ft
Top width, T	2.3925	ft
Froude number, F	2.11	
Average shear stress (tractive force), tau	0.5649	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 23 PDR

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	38.3	%

Results

Flow, Q (See notes)	7.0376	cfs
Velocity, v	6.3570	ft/sec
Velocity head, h_v	0.6281	ft H2O
Flow area	1.1071	ft^2
Wetted perimeter	2.6692	ft
Hydraulic radius	0.4148	ft
Top width, T	1.9445	ft
Froude number, F	1.49	
Average shear stress (tractive force), tau	0.2589	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 24 PDR

24" RCP @ 1.00%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	14.5	%

Results

Flow, Q (See notes)	1.0252	cfs
Velocity, v	3.6443	ft/sec
Velocity head, h_v	0.2064	ft H2O
Flow area	0.2813	ft^2
Wetted perimeter	1.5626	ft
Hydraulic radius	0.1800	ft
Top width, T	1.4084	ft
Froude number, F	1.44	
Average shear stress (tractive force), tau	0.1124	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 25 PDR

30" RCP @ 1.00%

Inputs

Pipe diameter, d_0	30	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	28	%

Results

Flow, Q (See notes)	7.0227	cfs
Velocity, v	6.2419	ft/sec
Velocity head, h_v	0.6055	ft H2O
Flow area	1.1251	ft^2
Wetted perimeter	2.7880	ft
Hydraulic radius	0.4036	ft
Top width, T	2.2450	ft
Froude number, F	1.55	
Average shear stress (tractive force), tau	0.2519	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 26 PDR

36" RCP @ 1.00%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	40.6	%

Results

Flow, Q (See notes)	23.0936	cfs
Velocity, v	8.5747	ft/sec
Velocity head, h_v	1.1427	ft H2O
Flow area	2.6933	ft^2
Wetted perimeter	4.1450	ft
Hydraulic radius	0.6498	ft
Top width, T	2.9465	ft
Froude number, F	1.58	
Average shear stress (tractive force), tau	0.4056	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 27 PDR

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	54.2	%

Results

Flow, Q (See notes)	6.0071	cfs
Velocity, v	6.1426	ft/sec
Velocity head, h_v	0.5864	ft H2O
Flow area	0.9780	ft^2
Wetted perimeter	2.4823	ft
Hydraulic radius	0.3940	ft
Top width, T	1.4947	ft
Froude number, F	1.34	
Average shear stress (tractive force), tau	0.2460	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 28 PDR

18" RCP @ 1.00%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	48.7	%

Results

Flow, Q (See notes)	5.0207	cfs
Velocity, v	5.8770	ft/sec
Velocity head, h_v	0.5368	ft H2O
Flow area	0.8543	ft^2
Wetted perimeter	2.3172	ft
Hydraulic radius	0.3687	ft
Top width, T	1.4995	ft
Froude number, F	1.37	
Average shear stress (tractive force), tau	0.2302	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 29 PDR

36" RCP @ 1.00%

Inputs

Pipe diameter, d_0	36	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	50.6	%

Results

Flow, Q (See notes)	34.0263	cfs
Velocity, v	9.4829	ft/sec
Velocity head, h_v	1.3976	ft H2O
Flow area	3.5883	ft^2
Wetted perimeter	4.7483	ft
Hydraulic radius	0.7557	ft
Top width, T	2.9998	ft
Froude number, F	1.53	
Average shear stress (tractive force), tau	0.4718	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 30 PDR

24" RCP @ 4.26%

Inputs

Pipe diameter, d_0	24	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	4.26	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	40.4	%

Results

Flow, Q (See notes)	16.0217	cfs
Velocity, v	13.4735	ft/sec
Velocity head, h_v	2.8214	ft H2O
Flow area	1.1892	ft^2
Wetted perimeter	2.7552	ft
Hydraulic radius	0.4316	ft
Top width, T	1.9628	ft
Froude number, F	3.05	
Average shear stress (tractive force), tau	1.1479	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 31 PDR

42" RCP @ 1.00%

Inputs

Pipe diameter, d_0	42	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	48.7	%

Results

Flow, Q (See notes)	48.0880	cfs
Velocity, v	10.3389	ft/sec
Velocity head, h_v	1.6613	ft H2O
Flow area	4.6514	ft^2
Wetted perimeter	5.4067	ft
Hydraulic radius	0.8603	ft
Top width, T	3.4988	ft
Froude number, F	1.58	
Average shear stress (tractive force), tau	0.5371	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe run 32 PDR

18" RCP @ 11.70%

Inputs

Pipe diameter, d_0	18	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	11.7	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	30	%

Results

Flow, Q (See notes)	7.0356	cfs
Velocity, v	15.7797	ft/sec
Velocity head, h_v	3.8699	ft H2O
Flow area	0.4459	ft^2
Wetted perimeter	1.7389	ft
Hydraulic radius	0.2564	ft
Top width, T	1.3748	ft
Froude number, F	4.90	
Average shear stress (tractive force), tau	1.8729	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

Manning Formula Uniform Pipe Flow at Given Slope and Depth

Pipe Run 33 PDR

42" RCP @ 1.00%

Inputs

Pipe diameter, d_0	42	in
Manning roughness, n	0.013	
Pressure slope (possibly ? equal to pipe slope), S_0	1.00	% rise/run
Percent of (or ratio to) full depth (100% or 1 if flowing full)	53.9	%

Results

Flow, Q (See notes)	57.0154	cfs
Velocity, v	10.7827	ft/sec
Velocity head, h_v	1.8070	ft H2O
Flow area	5.2879	ft^2
Wetted perimeter	5.7710	ft
Hydraulic radius	0.9163	ft
Top width, T	3.4893	ft
Froude number, F	1.54	
Average shear stress (tractive force), tau	0.5720	psf



Notes:

This is the flow and depth *inside* the pipe.
Getting the flow into the pipe may require significantly higher headwater depth. Add at least 1.5 times the velocity head to get the headwater depth or see my 2-minute tutorial for standard culvert headwater calculations using HY-8.

MDDP
FULL SPECTRUM DETENTION & WATER QUALITY CALCULATIONS

POND TRIBUTARY AREA

POND 1 TRIB AREA (DP 8)	**22.34** AC	BASINS A, B1, B2, C, D ,E, F, H, G1, G2, & K	DCIA	5.03
			UIA	6.92
			RPA	2.46
			SPA	7.94
			Total	**22.34**
POND 2 TRIB AREA (DP 18)	**21.06** AC	BASINS L1, L2, O1, O2, O-3, O-4 & OS-4	DCIA	2.34
			UIA	3.23
			RPA	0.94
			SPA	14.55
			Total	**21.06**
POND 3 TRIB AREA (DP 29)	**82.44** AC	BASINS Q1, Q2, R, S1, S2, T1, T2, U1, U2, V, W, X, OS-1, OS-2, OS-3A, 0S-3B, OS-Q1, OS-Q2, OS-4, OS-S1, OS-S2, OS-T2, OS-7, & OS-9	DCIA	19.50
			UIA	22.09
			RPA	9.10
			SPA	31.74
			Total	**82.44**

Worksheet Protected

Site-Level Low Impact Development (LID) Design Effective Impervious Calculator

LID Credit by Impervious Reduction Factor (IRF) Method

UD-BMP (Version 3.06, November 2016)

User Input

Calculated cells

***Design Storm: 1-Hour Rain Depth	WQCV Event	0.43	inches	**Designer:**	**QNA**
***Minor Storm: 1-Hour Rain Depth	5-Year Event	1.50	inches	**Company:**	**Terra Nova Engineering**
***Major Storm: 1-Hour Rain Depth	100-Year Event	2.52	inches	**Date:**	**June 16, 2022**
Optional User Defined Storm	CUHP			**Project:**	**WATERBURY FILING 1 POND 1**
(CUHP) NOAA 1 Hour Rainfall Depth and Frequency for User Defined Storm	100-Year Event			**Location:**	**POND 1 Design Point 8 Full Spectrum Detention**
Max Intensity for Optional User Defined Storm	0				

SITE INFORMATION (USER-INPUT)

Sub-basin Identifier	**DP 8 FSD**														
Receiving Pervious Area Soil Type	Loamy Sand														
Total Area (ac., Sum of DCIA, UIA, RPA, & SPA)	22.34														
Directly Connected Impervious Area (DCIA, acres)	5.03														
Unconnected Impervious Area (UIA, acres)	6.92														
Receiving Pervious Area (RPA, acres)	2.46														
Separate Pervious Area (SPA, acres)	7.94														
RPA Treatment Type: Conveyance (C), Volume (V), or Permeable Pavement (PP)	C														

CALCULATED RESULTS (OUTPUT)

Total Calculated Area (ac, check against input)	22.343														
Directly Connected Impervious Area (DCIA, %)	22.5%														
Unconnected Impervious Area (UIA, %)	31.0%														
Receiving Pervious Area (RPA, %)	11.0%														
Separate Pervious Area (SPA, %)	35.5%														
A_R (RPA / UIA)	0.355														
I_a Check	0.740														
f / I for WQCV Event:	4.5														
f / I for 5-Year Event:	0.5														
f / I for 100-Year Event:	0.4														
f / I for Optional User Defined Storm CUHP:															
IRF for WQCV Event:	0.74														
IRF for 5-Year Event:	0.93														
IRF for 100-Year Event:	0.95														
IRF for Optional User Defined Storm CUHP:															
Total Site Imperviousness: I_{total}	53.5%														
Effective Imperviousness for WQCV Event:	45.5%														
Effective Imperviousness for 5-Year Event:	51.3%														
Effective Imperviousness for 100-Year Event:	51.9%														
Effective Imperviousness for Optional User Defined Storm CUHP:															

LID / EFFECTIVE IMPERVIOUSNESS CREDITS

WQCV Event CREDIT: Reduce Detention By:	10.0%	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
This line only for 10-Year Event	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100-Year Event CREDIT**: Reduce Detention By:	2.9%	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
User Defined CUHP CREDIT: Reduce Detention By:															

Total Site Imperviousness:	**53.5%**
Total Site Effective Imperviousness for WQCV Event:	**45.5%**
Total Site Effective Imperviousness for 5-Year Event:	**51.3%**
Total Site Effective Imperviousness for 100-Year Event:	**51.9%**
Total Site Effective Imperviousness for Optional User Defined Storm CUHP:	

Notes:

* Use Green-Ampt average infiltration rate values from Table 3-3.

** Flood control detention volume credits based on empirical equations from Storage Chapter of USDCM.

*** Method assumes that 1-hour rainfall depth is equivalent to 1-hour intensity for calculation purposed

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

Project: WATERBURY

Basin ID: POND 1 DP 8

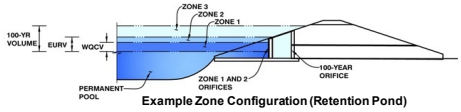

Example Zone Configuration (Retention Pond)

Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	22.34	acres
Watershed Length =	1,250	ft
Watershed Length to Centroid =	325	ft
Watershed Slope =	0.019	ft/ft
Watershed Imperviousness =	51.90%	percent
Percentage Hydrologic Soil Group A =	100.0%	percent
Percentage Hydrologic Soil Group B =	0.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1-hr Rainfall Depths =	User Input	

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

			Optional User Overrides	
Water Quality Capture Volume (WQCV) =	0.394	acre-feet		acre-feet
Excess Urban Runoff Volume (EURV) =	1.351	acre-feet		acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	0.000	acre-feet	1.19	inches
5-yr Runoff Volume (P1 = 1.5 in.) =	0.000	acre-feet	1.50	inches
10-yr Runoff Volume (P1 = 1.75 in.) =	0.000	acre-feet	1.75	inches
25-yr Runoff Volume (P1 = 2 in.) =	0.000	acre-feet	2.00	inches
50-yr Runoff Volume (P1 = 2.25 in.) =	0.000	acre-feet	2.25	inches
100-yr Runoff Volume (P1 = 2.52 in.) =	0.000	acre-feet	2.52	inches
500-yr Runoff Volume (P1 = 3 in.) =	0.000	acre-feet	3.00	inches
Approximate 2-yr Detention Volume =	0.870	acre-feet		
Approximate 5-yr Detention Volume =	1.145	acre-feet		
Approximate 10-yr Detention Volume =	1.394	acre-feet		
Approximate 25-yr Detention Volume =	1.702	acre-feet		
Approximate 50-yr Detention Volume =	1.896	acre-feet		
Approximate 100-yr Detention Volume =	2.127	acre-feet		

Define Zones and Basin Geometry

Zone 1 Volume (WQCV) =	0.394	acre-feet
Zone 2 Volume (EURV - Zone 1) =	0.957	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	0.775	acre-feet
Total Detention Basin Volume =	2.127	acre-feet
Initial Surcharge Volume (ISV) =	user	ft^3
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H_{total}) =	user	ft
Depth of Trickle Channel (H_{TC}) =	user	ft
Slope of Trickle Channel (S_{TC}) =	user	ft/ft
Slopes of Main Basin Sides (S_{main}) =	user	H:V
Basin Length-to-Width Ratio ($R_{L/W}$) =	user	

Initial Surcharge Area (A_{ISV}) =	user	ft^2
Surcharge Volume Length (L_{ISV}) =	user	ft
Surcharge Volume Width (W_{ISV}) =	user	ft
Depth of Basin Floor (H_{FLOOR}) =	user	ft
Length of Basin Floor (L_{FLOOR}) =	user	ft
Width of Basin Floor (W_{FLOOR}) =	user	ft
Area of Basin Floor (A_{FLOOR}) =	user	ft^2
Volume of Basin Floor (V_{FLOOR}) =	user	ft^3
Depth of Main Basin (H_{MAIN}) =	user	ft
Length of Main Basin (L_{MAIN}) =	user	ft
Width of Main Basin (W_{MAIN}) =	user	ft
Area of Main Basin (A_{MAIN}) =	user	ft^2
Volume of Main Basin (V_{MAIN}) =	user	ft^3
Calculated Total Basin Volume (V_{total}) =	**user**	acre-feet

Depth Increment = ft

Stage - Storage Description	Stage (ft)	Optional Override Stage (ft)	Length (ft)	Width (ft)	Area (ft^2)	Optional Override Area (ft^2)	Area (acre)	Volume (ft^3)	Volume (ac-ft)
Top of Micropool	--	0.00	--	--	--	100	0.002		
6923.75	--	0.25	--	--	--	3,200	0.073	412	0.009
6924.00	--	0.50	--	--	--	6,302	0.145	1,600	0.037
6924.25	--	0.75	--	--	--	8,582	0.197	3,461	0.079
6924.50	--	1.00	--	--	--	10,862	0.249	5,891	0.135
6924.75	--	1.25	--	--	--	13,142	0.302	8,892	0.204
6925.00	--	1.50	--	--	--	15,422	0.354	12,462	0.286
6925.25	--	1.75	--	--	--	17,702	0.406	16,602	0.381
6925.50	--	2.00	--	--	--	19,981	0.459	21,313	0.489
6925.75	--	2.25	--	--	--	22,262	0.511	26,593	0.610
6926.00	--	2.50	--	--	--	24,542	0.563	32,444	0.745
6926.25	--	2.75	--	--	--	26,599	0.611	38,836	0.892
6926.50	--	3.00	--	--	--	28,655	0.658	45,743	1.050
6926.75	--	3.25	--	--	--	30,713	0.705	53,164	1.220
6927.00	--	3.50	--	--	--	32,770	0.752	61,099	1.403
6927.25	--	3.75	--	--	--	34,826	0.799	69,549	1.597
6927.50	--	4.00	--	--	--	36,883	0.847	78,513	1.802
6927.75	--	4.25	--	--	--	38,940	0.894	87,990	2.020
6928.00	--	4.50	--	--	--	40,997	0.941	97,983	2.249
6928.25	--	4.75	--	--	--	43,397	0.996	108,532	2.492
6928.50	--	5.00	--	--	--	45,797	1.051	119,681	2.747
6928.75	--	5.25	--	--	--	48,198	1.106	131,430	3.017
6929.00	--	5.50	--	--	--	50,598	1.162	143,780	3.301
6929.25	--	5.75	--	--	--	52,988	1.216	156,728	3.598
6929.50	--	6.00	--	--	--	55,398	1.272	170,276	3.909
6929.75	--	6.25	--	--	--	57,798	1.327	184,426	4.234
6930.00	--	6.50	--	--	--	60,198	1.382	199,175	4.572

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

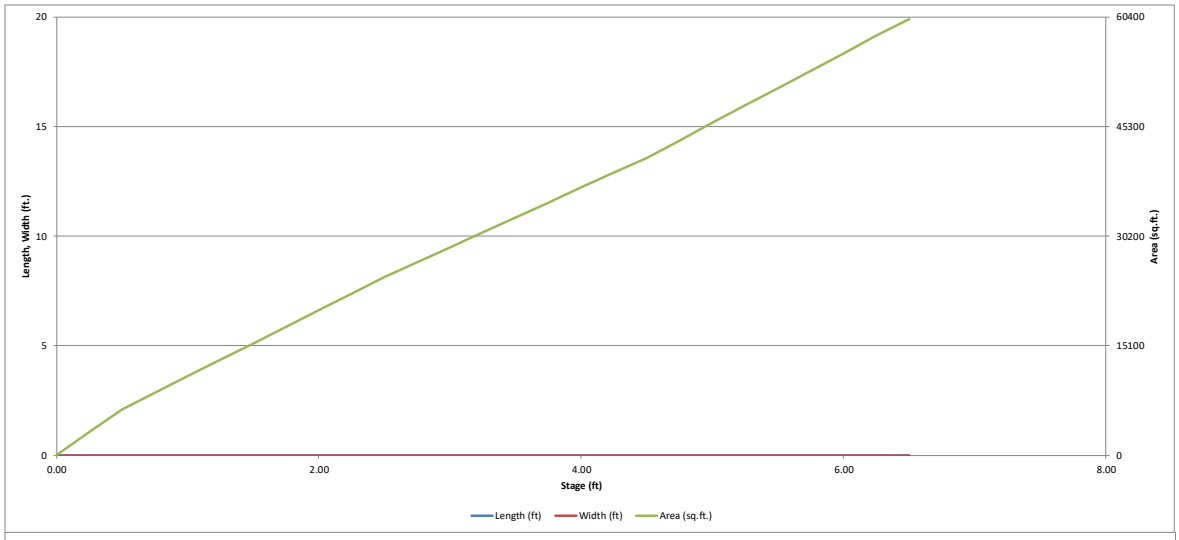

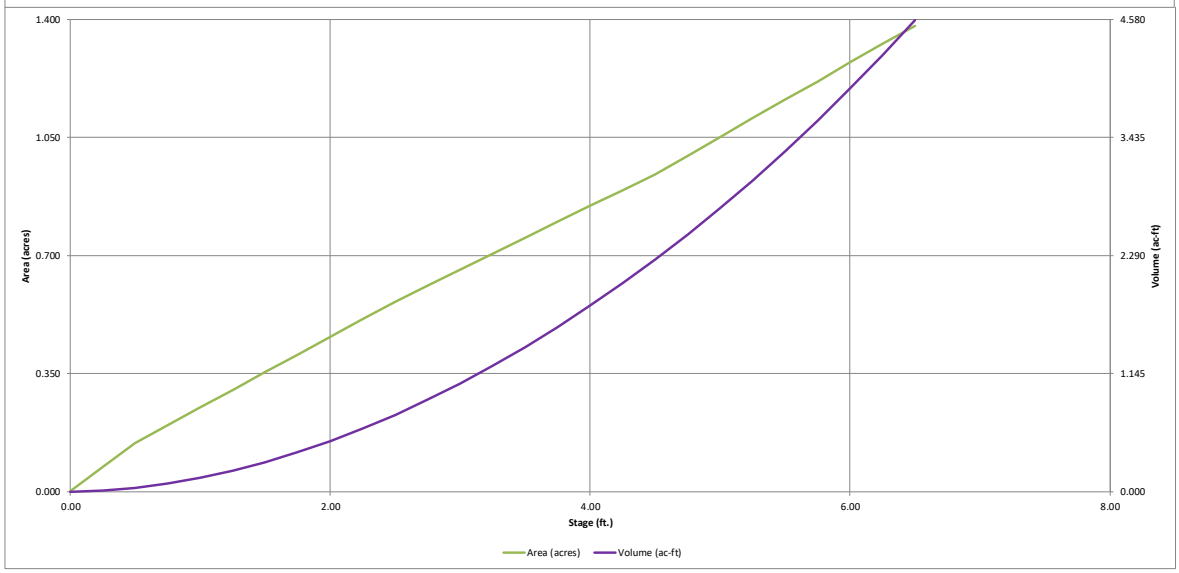

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.03 (May 2020)

Project: WATERBURY

Basin ID: POND 1 DP 8

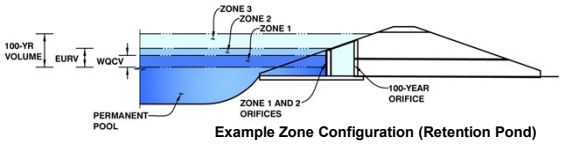

Example Zone Configuration (Retention Pond)

	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	1.79	0.394	Orifice Plate
Zone 2 (EURV)	3.44	0.957	Orifice Plate
Zone 3 (100-year)	4.37	0.775	Weir&Pipe (Restrict)
Total (all zones)		2.127	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =		ft (distance below the filtration media surface)	Underdrain Orifice Area =		ft^2
Underdrain Orifice Diameter =		inches	Underdrain Orifice Centroid =		feet

Calculated Parameters for Underdrain

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =	0.00	ft (relative to basin bottom at Stage = 0 ft)	WQ Orifice Area per Row =	2.111E-02	ft^2
Depth at top of Zone using Orifice Plate =	3.44	ft (relative to basin bottom at Stage = 0 ft)	Elliptical Half-Width =	N/A	feet
Orifice Plate: Orifice Vertical Spacing =	13.80	inches	Elliptical Slot Centroid =	N/A	feet
Orifice Plate: Orifice Area per Row =	3.04	sq. inches (diameter = 1-15/16 inches)	Elliptical Slot Area =	N/A	ft^2

Calculated Parameters for Plate

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	1.15	2.29					
Orifice Area (sq. inches)	3.04	3.04	3.04					

	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

	Not Selected	Not Selected			Not Selected	Not Selected	
Invert of Vertical Orifice =	N/A	N/A	ft (relative to basin bottom at Stage = 0 ft)	Vertical Orifice Area =	N/A	N/A	ft^2
Depth at top of Zone using Vertical Orifice =	N/A	N/A	ft (relative to basin bottom at Stage = 0 ft)	Vertical Orifice Centroid =	N/A	N/A	feet
Vertical Orifice Diameter =	N/A	N/A	inches				

Calculated Parameters for Vertical Orifice

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe)

	Zone 3 Weir	Not Selected			Zone 3 Weir	Not Selected	
Overflow Weir Front Edge Height, Ho =	3.44	N/A	ft (relative to basin bottom at Stage = 0 ft)	Height of Grate Upper Edge, H_t =	3.44	N/A	feet
Overflow Weir Front Edge Length =	4.00	N/A	feet	Overflow Weir Slope Length =	4.00	N/A	feet
Overflow Weir Grate Slope =	0.00	N/A	H:V	Grate Open Area / 100-yr Orifice Area =	7.13	N/A	
Horiz. Length of Weir Sides =	4.00	N/A	feet	Overflow Grate Open Area w/o Debris =	11.20	N/A	ft^2
Overflow Grate Open Area % =	70%	N/A	%, grate open area/total area	Overflow Grate Open Area w/ Debris =	5.60	N/A	ft^2
Debris Clogging % =	50%	N/A	%				

Calculated Parameters for Overflow Weir

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

	Zone 3 Restrictor	Not Selected			Zone 3 Restrictor	Not Selected	
Depth to Invert of Outlet Pipe =	0.10	N/A	ft (distance below basin bottom at Stage = 0 ft)	Outlet Orifice Area =	1.57	N/A	ft^2
Outlet Pipe Diameter =	24.00	N/A	inches	Outlet Orifice Centroid =	0.58	N/A	feet
Restrictor Plate Height Above Pipe Invert =	12.00		inches	Half-Central Angle of Restrictor Plate on Pipe =	1.57	N/A	radians

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage=	4.50	ft (relative to basin bottom at Stage = 0 ft)	Spillway Design Flow Depth=	0.73	feet
Spillway Crest Length =	30.00	feet	Stage at Top of Freeboard =	6.23	feet
Spillway End Slopes =	3.00	H:V	Basin Area at Top of Freeboard =	1.32	acres
Freeboard above Max Water Surface =	1.00	feet	Basin Volume at Top of Freeboard =	4.21	acre-ft

Calculated Parameters for Spillway

Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

Design Storm Return Period =	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
One-Hour Rainfall Depth (in) =	N/A	N/A	1.19	1.50	1.75	2.00	2.25	2.52	3.00
CUHP Runoff Volume (acre-ft) =	0.394	1.351	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	0.974	1.292	1.546	1.939	2.321	2.805	3.607
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A	0.0	0.0	0.0	0.0	0.0	0.0	0.0
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A	N/A	0.2	0.4	0.6	5.3	10.4	17.1	27.3
Predevelopment Unit Peak Flow, q (cfs/acre) =	N/A	N/A	0.01	0.02	0.03	0.24	0.47	0.77	1.22
Peak Inflow Q (cfs) =	N/A	N/A	18.4	24.5	28.9	38.8	47.6	60.0	77.2
Peak Outflow Q (cfs) =	0.2	0.5	0.4	0.4	1.7	5.1	10.3	14.5	21.9
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A	1.1	2.8	1.0	1.0	0.8	0.8
Structure Controlling Flow =	Plate	Overflow Weir 1	Plate	Plate	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Spillway
Max Velocity through Grate 1 (fps) =	N/A	N/A	N/A	N/A	0.1	0.4	0.9	1.2	1.3
Max Velocity through Grate 2 (fps) =	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours) =	38	68	59	67	71	69	67	65	62
Time to Drain 99% of Inflow Volume (hours) =	**40**	73	63	72	76	75	75	74	73
Maximum Ponding Depth (ft) =	1.79	3.44	2.80	3.26	3.55	3.70	3.87	4.16	4.67
Area at Maximum Ponding Depth (acres) =	0.41	0.74	0.62	0.71	0.76	0.79	0.82	0.88	0.98
Maximum Volume Stored (acre-ft) =	0.398	1.358	0.916	1.220	1.433	1.557	1.694	1.940	2.403

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.00 (December 2019)

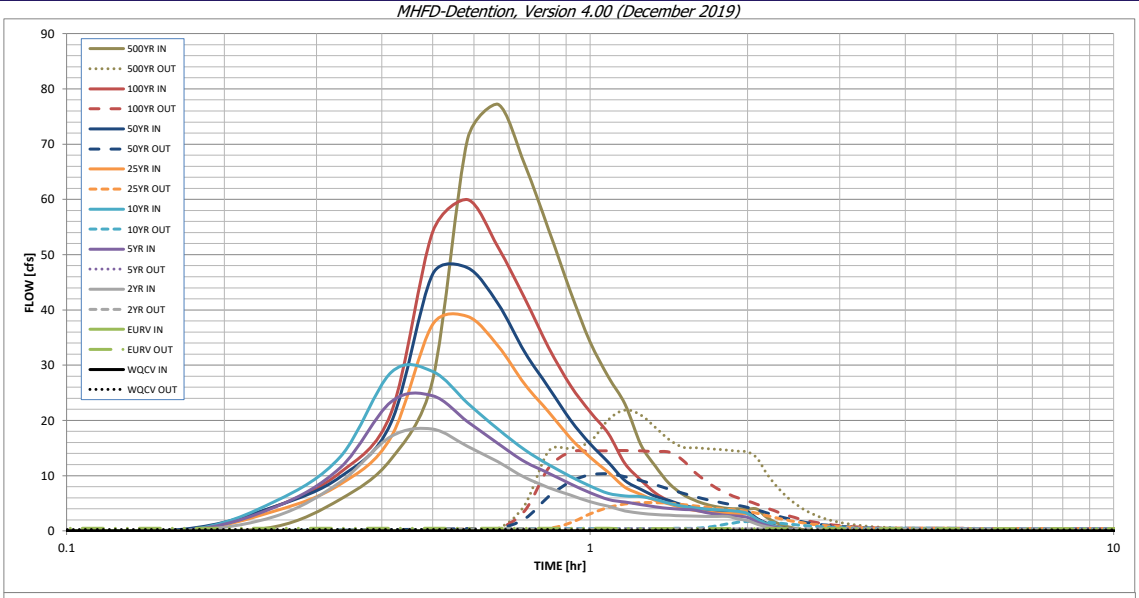

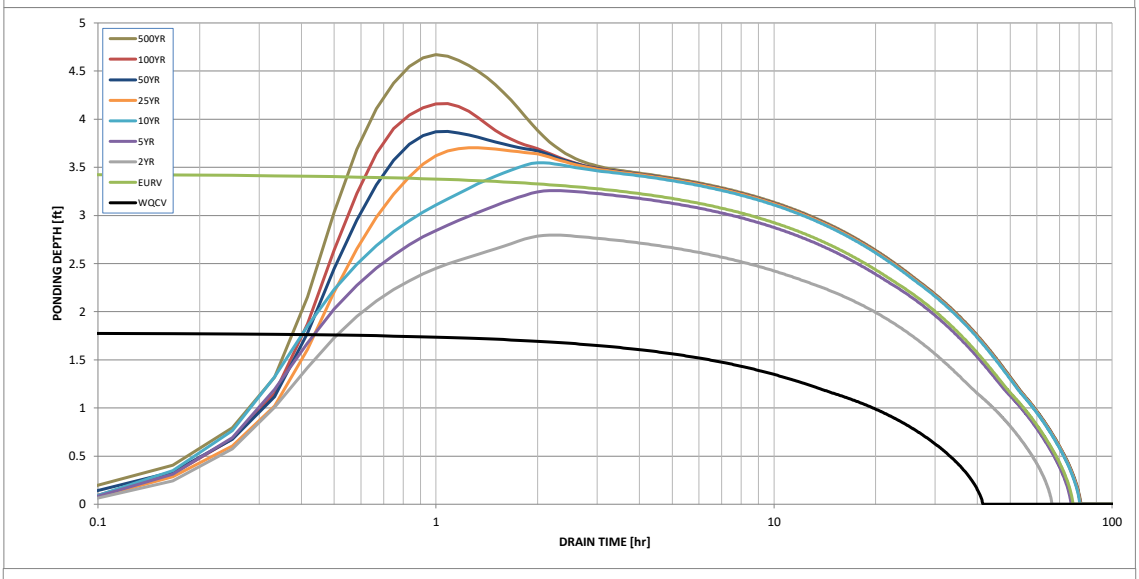

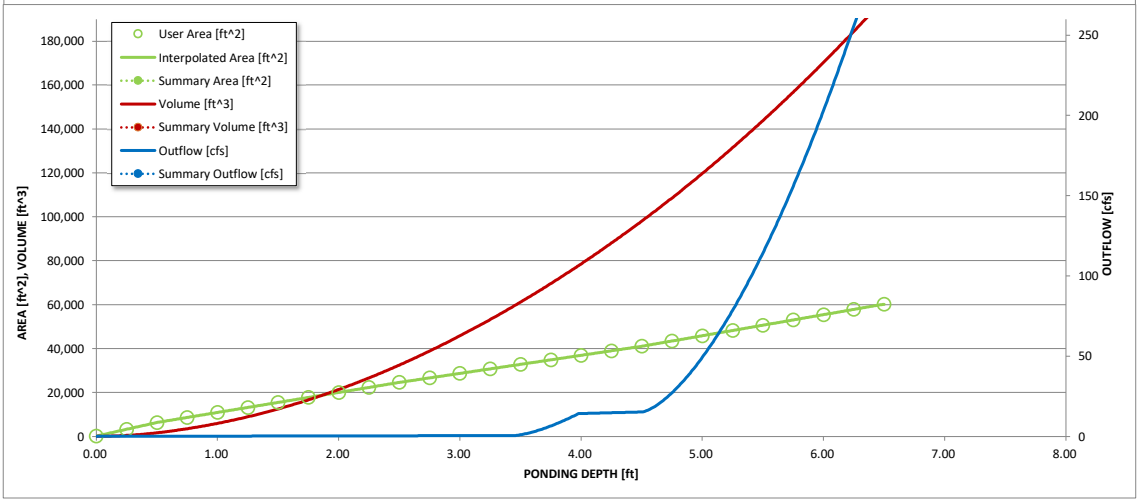

S-A-V-D Chart Axis Override	X-axis	Left Y-Axis	Right Y-Axis
minimum bound			
maximum bound			

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: _____

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
Time Interval	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.03	0.76
	0:15:00	0.00	0.00	2.64	4.30	5.34	3.60	4.44	4.39	5.74
	0:20:00	0.00	0.00	8.87	11.46	13.44	8.45	9.79	10.59	12.98
	0:25:00	0.00	0.00	17.10	23.36	28.66	16.99	19.58	21.33	27.27
	0:30:00	0.00	0.00	18.41	24.45	28.87	37.34	46.49	54.12	70.90
	0:35:00	0.00	0.00	15.27	19.79	23.15	38.82	47.62	59.97	77.19
	0:40:00	0.00	0.00	12.50	15.81	18.41	33.51	41.16	51.36	66.26
	0:45:00	0.00	0.00	9.68	12.52	14.67	26.53	32.33	42.08	54.59
	0:50:00	0.00	0.00	7.85	10.45	11.98	21.55	25.98	33.20	43.37
	0:55:00	0.00	0.00	6.47	8.52	9.88	16.80	20.08	26.35	34.19
	1:00:00	0.00	0.00	5.29	6.90	8.11	13.33	15.77	21.53	27.87
	1:05:00	0.00	0.00	4.45	5.70	6.79	10.59	12.42	17.63	22.92
	1:10:00	0.00	0.00	3.63	5.20	6.33	7.90	9.10	12.19	15.65
	1:15:00	0.00	0.00	3.21	4.77	6.20	6.60	7.54	9.22	11.69
	1:20:00	0.00	0.00	2.96	4.34	5.69	5.50	6.24	6.86	8.58
	1:25:00	0.00	0.00	2.82	4.06	4.97	4.86	5.49	5.41	6.66
	1:30:00	0.00	0.00	2.73	3.88	4.49	4.16	4.69	4.56	5.55
	1:35:00	0.00	0.00	2.67	3.77	4.17	3.73	4.21	3.99	4.81
	1:40:00	0.00	0.00	2.63	3.31	3.96	3.45	3.89	3.62	4.33
	1:45:00	0.00	0.00	2.61	2.99	3.82	3.27	3.68	3.42	4.07
	1:50:00	0.00	0.00	2.61	2.78	3.72	3.17	3.57	3.35	3.99
	1:55:00	0.00	0.00	2.16	2.65	3.53	3.11	3.50	3.32	3.95
	2:00:00	0.00	0.00	1.86	2.47	3.16	3.08	3.47	3.32	3.95
	2:05:00	0.00	0.00	1.22	1.61	2.07	2.02	2.27	2.17	2.58
	2:10:00	0.00	0.00	0.77	1.02	1.33	1.30	1.46	1.40	1.66
	2:15:00	0.00	0.00	0.48	0.63	0.83	0.82	0.92	0.88	1.04
	2:20:00	0.00	0.00	0.28	0.38	0.50	0.49	0.55	0.52	0.62
	2:25:00	0.00	0.00	0.15	0.23	0.28	0.29	0.33	0.31	0.36
	2:30:00	0.00	0.00	0.06	0.11	0.13	0.14	0.16	0.15	0.18
	2:35:00	0.00	0.00	0.02	0.04	0.04	0.05	0.05	0.05	0.05
	2:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Worksheet Protected

Site-Level Low Impact Development (LID) Design Effective Impervious Calculator

LID Credit by Impervious Reduction Factor (IRF) Method

UD-BMP (Version 3.06, November 2016)

User Input

Calculated cells

***Design Storm: 1-Hour Rain Depth	WQCV Event	0.43	inches	
***Minor Storm: 1-Hour Rain Depth	5-Year Event	1.50	inches	
***Major Storm: 1-Hour Rain Depth	100-Year Event	2.52	inches	
Optional User Defined Storm	CUHP			
(CUHP) NOAA 1 Hour Rainfall Depth and Frequency for User Defined Storm	100-Year Event			
Max Intensity for Optional User Defined Storm	0			

Designer: QNA
Company: Terra Nova Engineering
Date: June 16, 2022
Project: WATERBURY FILING 1 POND 2
Location: POND 2 Design Point 18 Full Spectrum Detention

SITE INFORMATION (USER-INPUT)

Sub-basin Identifier	**DP 18 FSD**
Receiving Pervious Area Soil Type	Loamy Sand
Total Area (ac., Sum of DCIA, UIA, RPA, & SPA)	21.06
Directly Connected Impervious Area (DCIA, acres)	2.34
Unconnected Impervious Area (UIA, acres)	3.23
Receiving Pervious Area (RPA, acres)	0.94
Separate Pervious Area (SPA, acres)	14.55
RPA Treatment Type: Conveyance (C), Volume (V), or Permeable Pavement (PP)	C

CALCULATED RESULTS (OUTPUT)

Total Calculated Area (ac, check against input)	21.061
Directly Connected Impervious Area (DCIA, %)	11.1%
Unconnected Impervious Area (UIA, %)	15.3%
Receiving Pervious Area (RPA, %)	4.5%
Separate Pervious Area (SPA, %)	69.1%
A_R (RPA / UIA)	0.290
I_a Check	0.770
f / I for WQCV Event:	4.5
f / I for 5-Year Event:	0.5
f / I for 100-Year Event:	0.4
f / I for Optional User Defined Storm CUHP:	
IRF for WQCV Event:	0.76
IRF for 5-Year Event:	0.94
IRF for 100-Year Event:	0.95
IRF for Optional User Defined Storm CUHP:	
Total Site Imperviousness: I_{total}	26.5%
Effective Imperviousness for WQCV Event:	22.8%
Effective Imperviousness for 5-Year Event:	25.5%
Effective Imperviousness for 100-Year Event:	25.8%
Effective Imperviousness for Optional User Defined Storm CUHP:	

LID / EFFECTIVE IMPERVIOUSNESS CREDITS

WQCV Event CREDIT: Reduce Detention By:	9.5%	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
This line only for 10-Year Event	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100-Year Event CREDIT**: Reduce Detention By:	2.8%	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
User Defined CUHP CREDIT: Reduce Detention By:														

Total Site Imperviousness:	**26.5%**
Total Site Effective Imperviousness for WQCV Event:	**22.8%**
Total Site Effective Imperviousness for 5-Year Event:	**25.5%**
Total Site Effective Imperviousness for 100-Year Event:	**25.8%**
Total Site Effective Imperviousness for Optional User Defined Storm CUHP:	

Notes:

* Use Green-Ampt average infiltration rate values from Table 3-3.

** Flood control detention volume credits based on empirical equations from Storage Chapter of USDCM.

*** Method assumes that 1-hour rainfall depth is equivalent to 1-hour intensity for calculation purposed

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

Project: WATERBURY

Basin ID: TEMPORARY POND 2 DP 18

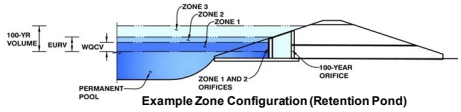

Example Zone Configuration (Retention Pond)

Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	21.06	acres
Watershed Length =	1,050	ft
Watershed Length to Centroid =	350	ft
Watershed Slope =	0.019	ft/ft
Watershed Imperviousness =	25.76%	percent
Percentage Hydrologic Soil Group A =	100.0%	percent
Percentage Hydrologic Soil Group B =	0.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1-hr Rainfall Depths =	User Input	

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

			Optional User Overrides	
Water Quality Capture Volume (WQCV) =	0.241	acre-feet		acre-feet
Excess Urban Runoff Volume (EURV) =	0.519	acre-feet		acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	0.344	acre-feet	1.19	inches
5-yr Runoff Volume (P1 = 1.5 in.) =	0.481	acre-feet	1.50	inches
10-yr Runoff Volume (P1 = 1.75 in.) =	0.601	acre-feet	1.75	inches
25-yr Runoff Volume (P1 = 2 in.) =	0.939	acre-feet	2.00	inches
50-yr Runoff Volume (P1 = 2.25 in.) =	1.255	acre-feet	2.25	inches
100-yr Runoff Volume (P1 = 2.52 in.) =	1.681	acre-feet	2.52	inches
500-yr Runoff Volume (P1 = 3 in.) =	2.377	acre-feet	3.00	inches
Approximate 2-yr Detention Volume =	0.324	acre-feet		
Approximate 5-yr Detention Volume =	0.435	acre-feet		
Approximate 10-yr Detention Volume =	0.547	acre-feet		
Approximate 25-yr Detention Volume =	0.698	acre-feet		
Approximate 50-yr Detention Volume =	0.818	acre-feet		
Approximate 100-yr Detention Volume =	1.027	acre-feet		

Define Zones and Basin Geometry

Zone 1 Volume (WQCV) =	0.241	acre-feet
Zone 2 Volume (EURV - Zone 1) =	0.278	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	0.508	acre-feet
Total Detention Basin Volume =	1.027	acre-feet
Initial Surcharge Volume (ISV) =	user	ft^3
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H_{total}) =	user	ft
Depth of Trickle Channel (H_{TC}) =	user	ft
Slope of Trickle Channel (S_{TC}) =	user	ft/ft
Slopes of Main Basin Sides (S_{main}) =	user	H:V
Basin Length-to-Width Ratio ($R_{L/W}$) =	user	

Initial Surcharge Area (A_{ISV}) =	user	ft^2
Surcharge Volume Length (L_{ISV}) =	user	ft
Surcharge Volume Width (W_{ISV}) =	user	ft
Depth of Basin Floor (H_{FLOOR}) =	user	ft
Length of Basin Floor (L_{FLOOR}) =	user	ft
Width of Basin Floor (W_{FLOOR}) =	user	ft
Area of Basin Floor (A_{FLOOR}) =	user	ft^2
Volume of Basin Floor (V_{FLOOR}) =	user	ft^3
Depth of Main Basin (H_{MAIN}) =	user	ft
Length of Main Basin (L_{MAIN}) =	user	ft
Width of Main Basin (W_{MAIN}) =	user	ft
Area of Main Basin (A_{MAIN}) =	user	ft^2
Volume of Main Basin (V_{MAIN}) =	user	ft^3
Calculated Total Basin Volume (V_{total}) =	**user**	acre-feet

Depth Increment = ft

Stage - Storage Description	Stage (ft)	Optional Override Stage (ft)	Length (ft)	Width (ft)	Area (ft^2)	Optional Override Area (ft^2)	Area (acre)	Volume (ft^3)	Volume (ac-ft)
Top of Micropool	--	0.00	--	--	--	100	0.002		
6899.25	--	0.25	--	--	--	942	0.022	130	0.003
6899.50	--	0.50	--	--	--	1,784	0.041	471	0.011
6899.75	--	0.75	--	--	--	2,626	0.060	1,022	0.023
6900.00	--	1.00	--	--	--	3,468	0.080	1,784	0.041
6900.25	--	1.25	--	--	--	5,034	0.116	2,847	0.065
6900.50	--	1.50	--	--	--	6,600	0.152	4,301	0.099
6900.75	--	1.75	--	--	--	8,166	0.187	6,147	0.141
6901.00	--	2.00	--	--	--	9,732	0.223	8,384	0.192
6901.25	--	2.25	--	--	--	11,297	0.259	11,013	0.253
6901.50	--	2.50	--	--	--	12,863	0.295	14,033	0.322
6901.75	--	2.75	--	--	--	14,429	0.331	17,444	0.400
6902.00	--	3.00	--	--	--	15,995	0.367	21,247	0.488
6902.25	--	3.25	--	--	--	19,602	0.450	25,697	0.590
6902.50	--	3.50	--	--	--	23,209	0.533	31,048	0.713
6902.75	--	3.75	--	--	--	26,815	0.616	37,301	0.856
6903.00	--	4.00	--	--	--	30,422	0.698	44,456	1.021
6903.25	--	4.25	--	--	--	34,029	0.781	52,512	1.206
6903.50	--	4.50	--	--	--	37,636	0.864	61,470	1.411
6903.75	--	4.75	--	--	--	41,243	0.947	71,330	1.638
6904.00	--	5.00	--	--	--	44,850	1.030	82,092	1.885
6904.25	--	5.25	--	--	--	48,650	1.117	93,779	2.153
6904.50	--	5.50	--	--	--	52,450	1.204	106,417	2.443
6904.75	--	5.75	--	--	--	56,251	1.291	120,004	2.755
6905.00	--	6.00	--	--	--	60,051	1.379	134,542	3.089
6905.25	--	6.25	--	--	--	63,851	1.466	150,030	3.444
6905.50	--	6.50	--	--	--	67,652	1.553	166,468	3.822
6905.75	--	6.75	--	--	--	71,452	1.640	183,856	4.221
6906.00	--	7.00	--	--	--	75,252	1.728	202,194	4.642

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

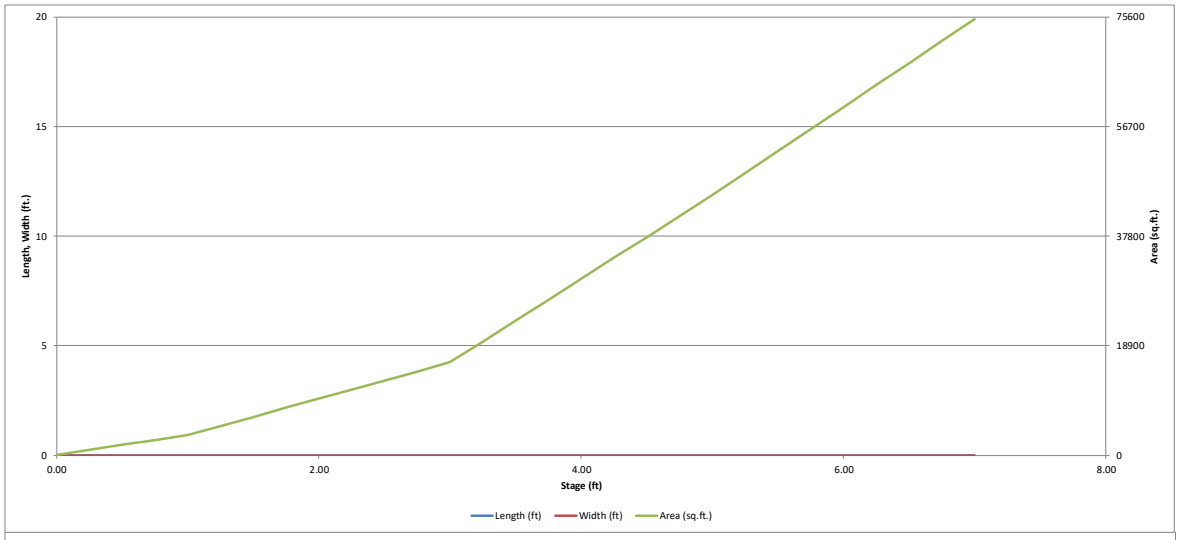

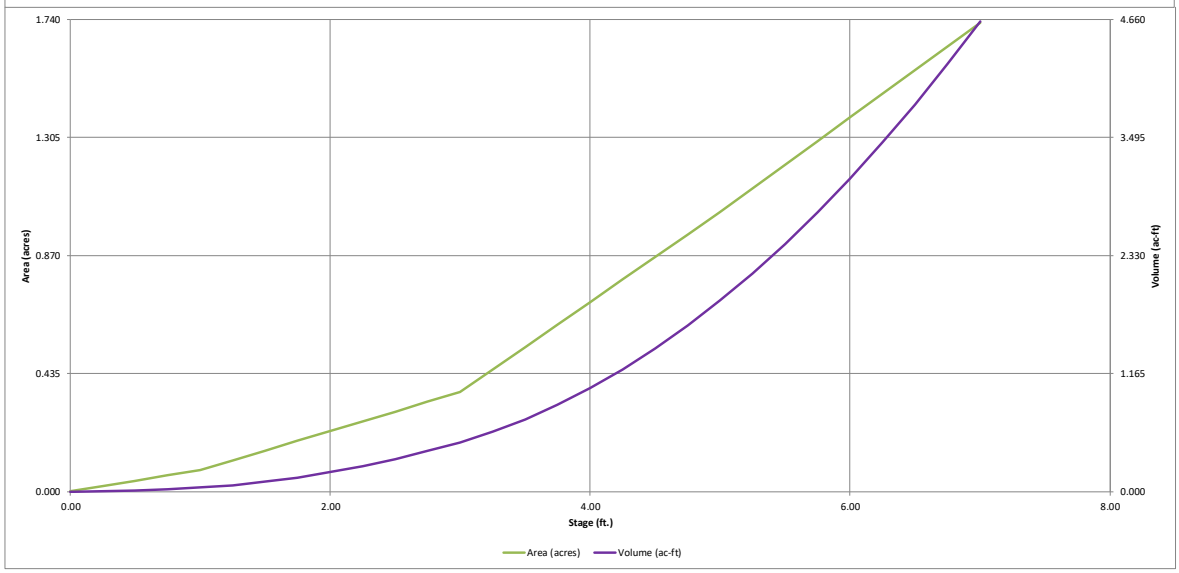

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.03 (May 2020)

Project: WATERBURY

Basin ID: TEMPORARY POND 2 DP 18

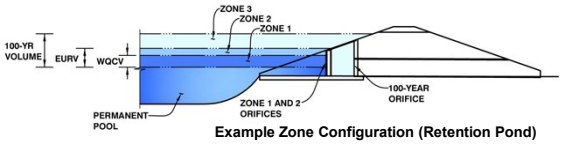

Example Zone Configuration (Retention Pond)

	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	2.21	0.241	Orifice Plate
Zone 2 (EURV)	3.09	0.278	Orifice Plate
Zone 3 (100-year)	4.01	0.508	Weir&Pipe (Restrict)
Total (all zones)		1.027	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =	N/A	ft (distance below the filtration media surface)	Underdrain Orifice Area =	N/A	ft^2
Underdrain Orifice Diameter =	N/A	inches	Underdrain Orifice Centroid =	N/A	feet

Calculated Parameters for Underdrain

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =	0.00	ft (relative to basin bottom at Stage = 0 ft)	WQ Orifice Area per Row =	9.306E-03	ft^2
Depth at top of Zone using Orifice Plate =	3.09	ft (relative to basin bottom at Stage = 0 ft)	Elliptical Half-Width =	N/A	feet
Orifice Plate: Orifice Vertical Spacing =	12.40	inches	Elliptical Slot Centroid =	N/A	feet
Orifice Plate: Orifice Area per Row =	1.34	sq. inches (diameter = 1-5/16 inches)	Elliptical Slot Area =	N/A	ft^2

Calculated Parameters for Plate

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	1.03	2.06					
Orifice Area (sq. inches)	1.34	1.34	1.34					

	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

	Not Selected	Not Selected			Not Selected	Not Selected	
Invert of Vertical Orifice =	N/A	N/A	ft (relative to basin bottom at Stage = 0 ft)	Vertical Orifice Area =	N/A	N/A	ft^2
Depth at top of Zone using Vertical Orifice =	N/A	N/A	ft (relative to basin bottom at Stage = 0 ft)	Vertical Orifice Centroid =	N/A	N/A	feet
Vertical Orifice Diameter =	N/A	N/A	inches				

Calculated Parameters for Vertical Orifice

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe)

	Zone 3 Weir	Not Selected			Zone 3 Weir	Not Selected	
Overflow Weir Front Edge Height, Ho =	3.09	N/A	ft (relative to basin bottom at Stage = 0 ft)	Height of Grate Upper Edge, H_t =	3.09	N/A	feet
Overflow Weir Front Edge Length =	4.00	N/A	feet	Overflow Weir Slope Length =	4.00	N/A	feet
Overflow Weir Grate Slope =	0.00	N/A	H:V	Grate Open Area / 100-yr Orifice Area =	6.34	N/A	
Horiz. Length of Weir Sides =	4.00	N/A	feet	Overflow Grate Open Area w/o Debris =	11.20	N/A	ft^2
Overflow Grate Open Area % =	70%	N/A	%, grate open area/total area	Overflow Grate Open Area w/ Debris =	5.60	N/A	ft^2
Debris Clogging % =	50%	N/A	%				

Calculated Parameters for Overflow Weir

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

	Zone 3 Restrictor	Not Selected			Zone 3 Restrictor	Not Selected	
Depth to Invert of Outlet Pipe =	0.20	N/A	ft (distance below basin bottom at Stage = 0 ft)	Outlet Orifice Area =	1.77	N/A	ft^2
Outlet Pipe Diameter =	18.00	N/A	inches	Outlet Orifice Centroid =	0.75	N/A	feet
Restrictor Plate Height Above Pipe Invert =	18.00		inches	Half-Central Angle of Restrictor Plate on Pipe =	3.14	N/A	radians

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage=	5.00	ft (relative to basin bottom at Stage = 0 ft)	Spillway Design Flow Depth=	0.59	feet
Spillway Crest Length =	20.00	feet	Stage at Top of Freeboard =	6.59	feet
Spillway End Slopes =	3.00	H:V	Basin Area at Top of Freeboard =	1.58	acres
Freeboard above Max Water Surface =	1.00	feet	Basin Volume at Top of Freeboard =	3.96	acre-ft

Calculated Parameters for Spillway

Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

Design Storm Return Period =	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
One-Hour Rainfall Depth (in) =	N/A	N/A	1.19	1.50	1.75	2.00	2.25	2.52	3.00
CUHP Runoff Volume (acre-ft) =	0.241	0.519	0.344	0.481	0.601	0.939	1.255	1.681	2.377
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	0.344	0.481	0.601	0.939	1.255	1.681	2.377
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A	0.2	0.5	0.6	5.6	10.8	17.5	27.9
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A	N/A							
Predevelopment Unit Peak Flow, q (cfs/acre) =	N/A	N/A	0.01	0.02	0.03	0.26	0.51	0.83	1.32
Peak Inflow Q (cfs) =	N/A	N/A	5.3	7.7	9.5	15.9	21.7	29.3	40.9
Peak Outflow Q (cfs) =	0.1	0.2	0.2	0.2	0.7	5.2	9.8	15.1	16.4
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A	0.4	1.2	0.9	0.9	0.9	0.6
Structure Controlling Flow =	Plate	Overflow Weir 1	Plate	Plate	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Outlet Plate 1
Max Velocity through Grate 1 (fps) =	N/A	N/A	N/A	N/A	0.0	0.5	0.9	1.3	1.4
Max Velocity through Grate 2 (fps) =	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours) =	38	55	45	54	58	55	52	49	45
Time to Drain 99% of Inflow Volume (hours) =	**40**	59	48	57	62	61	60	58	56
Maximum Ponding Depth (ft) =	2.21	3.09	2.49	2.90	3.15	3.37	3.52	3.71	4.25
Area at Maximum Ponding Depth (acres) =	0.25	0.40	0.29	0.35	0.42	0.49	0.54	0.60	0.78
Maximum Volume Stored (acre-ft) =	0.243	0.522	0.316	0.448	0.547	0.641	0.718	0.826	1.198

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.00 (December 2019)

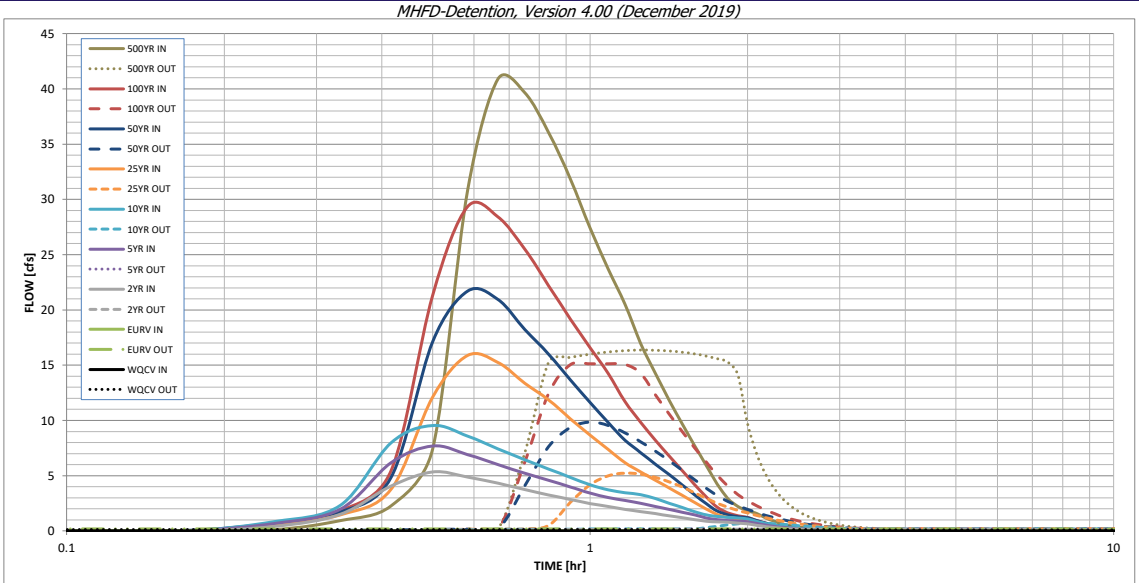

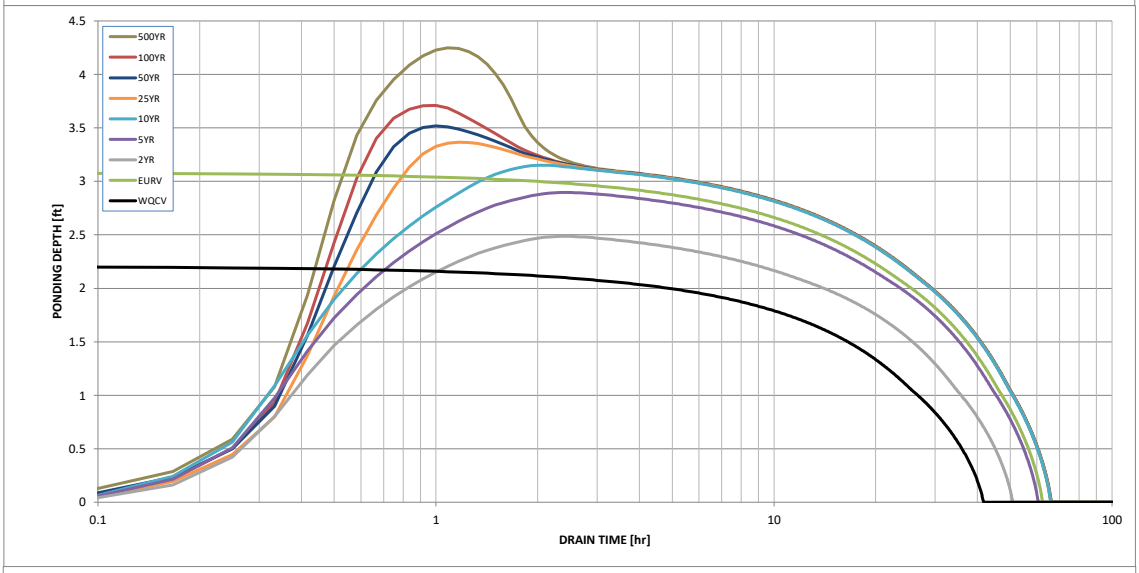

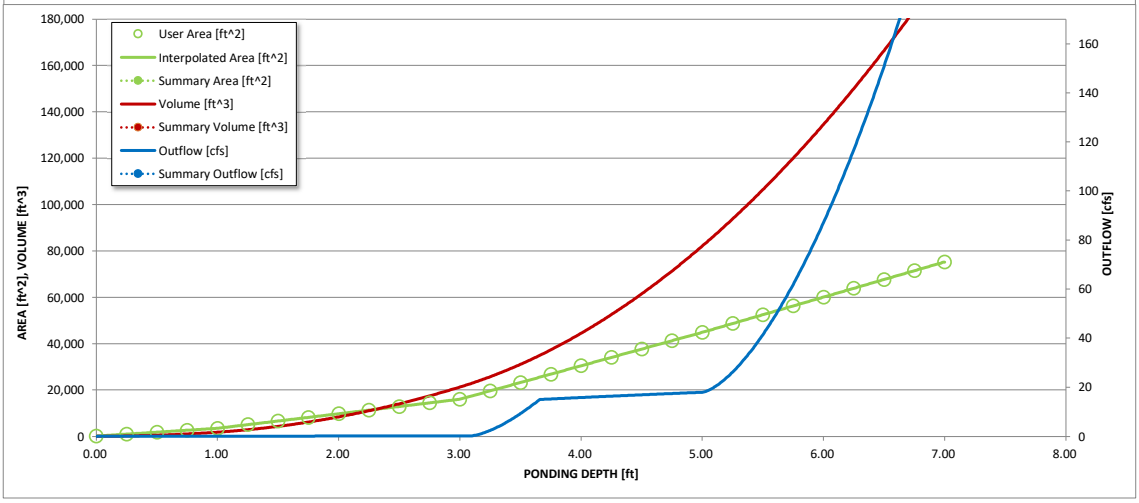

S-A-V-D Chart Axis Override	X-axis	Left Y-Axis	Right Y-Axis
minimum bound			
maximum bound			

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: _____

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
Time Interval	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	0.12
	0:15:00	0.00	0.00	0.42	0.68	0.85	0.57	0.71	0.70	0.94
	0:20:00	0.00	0.00	1.50	1.97	2.32	1.47	1.72	1.84	2.28
	0:25:00	0.00	0.00	4.07	6.19	7.98	3.76	4.83	5.45	7.42
	0:30:00	0.00	0.00	5.34	7.70	9.55	12.10	17.11	21.32	30.78
	0:35:00	0.00	0.00	4.88	6.92	8.59	15.87	21.71	29.34	40.89
	0:40:00	0.00	0.00	4.31	6.01	7.43	15.25	20.95	28.41	39.65
	0:45:00	0.00	0.00	3.74	5.22	6.44	13.37	18.23	25.50	36.05
	0:50:00	0.00	0.00	3.26	4.59	5.61	11.86	16.00	22.20	31.86
	0:55:00	0.00	0.00	2.85	3.98	4.85	10.15	13.68	19.18	27.41
	1:00:00	0.00	0.00	2.48	3.42	4.17	8.66	11.61	16.58	23.68
	1:05:00	0.00	0.00	2.20	3.01	3.72	7.36	9.80	14.23	20.51
	1:10:00	0.00	0.00	1.96	2.75	3.47	6.18	8.21	11.70	16.95
	1:15:00	0.00	0.00	1.75	2.49	3.28	5.33	7.09	9.84	14.26
	1:20:00	0.00	0.00	1.56	2.22	2.92	4.58	6.05	8.21	11.83
	1:25:00	0.00	0.00	1.38	1.95	2.51	3.90	5.09	6.77	9.68
	1:30:00	0.00	0.00	1.20	1.69	2.11	3.22	4.16	5.46	7.75
	1:35:00	0.00	0.00	1.03	1.45	1.75	2.58	3.27	4.22	5.92
	1:40:00	0.00	0.00	0.89	1.18	1.45	1.99	2.46	3.07	4.25
	1:45:00	0.00	0.00	0.82	1.03	1.31	1.49	1.79	2.14	2.94
	1:50:00	0.00	0.00	0.79	0.95	1.24	1.23	1.46	1.64	2.22
	1:55:00	0.00	0.00	0.71	0.89	1.17	1.10	1.28	1.38	1.83
	2:00:00	0.00	0.00	0.63	0.83	1.08	1.03	1.19	1.22	1.57
	2:05:00	0.00	0.00	0.51	0.66	0.86	0.81	0.93	0.93	1.18
	2:10:00	0.00	0.00	0.40	0.52	0.67	0.62	0.71	0.69	0.87
	2:15:00	0.00	0.00	0.31	0.41	0.52	0.48	0.55	0.52	0.63
	2:20:00	0.00	0.00	0.24	0.31	0.40	0.37	0.42	0.38	0.46
	2:25:00	0.00	0.00	0.19	0.24	0.30	0.28	0.32	0.29	0.35
	2:30:00	0.00	0.00	0.14	0.18	0.23	0.21	0.24	0.22	0.26
	2:35:00	0.00	0.00	0.11	0.14	0.17	0.16	0.18	0.17	0.20
	2:40:00	0.00	0.00	0.08	0.10	0.13	0.12	0.13	0.13	0.15
	2:45:00	0.00	0.00	0.06	0.07	0.10	0.09	0.10	0.10	0.11
	2:50:00	0.00	0.00	0.04	0.05	0.07	0.06	0.07	0.07	0.08
	2:55:00	0.00	0.00	0.02	0.03	0.04	0.04	0.05	0.04	0.05
	3:00:00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03
	3:05:00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01
	3:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Worksheet Protected

Site-Level Low Impact Development (LID) Design Effective Impervious Calculator

LID Credit by Impervious Reduction Factor (IRF) Method

UD-BMP (Version 3.06, November 2016)

User Input

Calculated cells

***Design Storm: 1-Hour Rain Depth	WQCV Event	0.43	inches	
***Minor Storm: 1-Hour Rain Depth	5-Year Event	1.50	inches	
***Major Storm: 1-Hour Rain Depth	100-Year Event	2.52	inches	
Optional User Defined Storm	CUHP			
(CUHP) NOAA 1 Hour Rainfall Depth and Frequency for User Defined Storm	100-Year Event			
Max Intensity for Optional User Defined Storm	0			

Designer: QNA
Company: Terra Nova Engineering
Date: June 16, 2022
Project: WATERBURY FILING 1 POND 3
Location: POND 3 Design Point 29 Full Spectrum Detention

SITE INFORMATION (USER-INPUT)

Sub-basin Identifier	**DP 29 FSD**														
Receiving Pervious Area Soil Type	Loamy Sand														
Total Area (ac., Sum of DCIA, UIA, RPA, & SPA)	82.44														
Directly Connected Impervious Area (DCIA, acres)	19.50														
Unconnected Impervious Area (UIA, acres)	22.09														
Receiving Pervious Area (RPA, acres)	9.10														
Separate Pervious Area (SPA, acres)	31.74														
RPA Treatment Type: Conveyance (C), Volume (V), or Permeable Pavement (PP)	C														

CALCULATED RESULTS (OUTPUT)

Total Calculated Area (ac, check against input)	82.435														
Directly Connected Impervious Area (DCIA, %)	23.7%														
Unconnected Impervious Area (UIA, %)	26.8%														
Receiving Pervious Area (RPA, %)	11.0%														
Separate Pervious Area (SPA, %)	38.5%														
A_R (RPA / UIA)	0.412														
I_a Check	0.710														
f / I for WQCV Event:	4.5														
f / I for 5-Year Event:	0.5														
f / I for 100-Year Event:	0.4														
f / I for Optional User Defined Storm CUHP:															
IRF for WQCV Event:	0.73														
IRF for 5-Year Event:	0.93														
IRF for 100-Year Event:	0.94														
IRF for Optional User Defined Storm CUHP:															
Total Site Imperviousness: I_{total}	50.5%														
Effective Imperviousness for WQCV Event:	43.1%														
Effective Imperviousness for 5-Year Event:	48.5%														
Effective Imperviousness for 100-Year Event:	49.0%														
Effective Imperviousness for Optional User Defined Storm CUHP:															

LID / EFFECTIVE IMPERVIOUSNESS CREDITS

WQCV Event CREDIT: Reduce Detention By:	9.4%	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
This line only for 10-Year Event	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100-Year Event CREDIT**: Reduce Detention By:	2.9%	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
User Defined CUHP CREDIT: Reduce Detention By:															

Total Site Imperviousness:	**50.5%**
Total Site Effective Imperviousness for WQCV Event:	**43.1%**
Total Site Effective Imperviousness for 5-Year Event:	**48.5%**
Total Site Effective Imperviousness for 100-Year Event:	**49.0%**
Total Site Effective Imperviousness for Optional User Defined Storm CUHP:	

Notes:

* Use Green-Ampt average infiltration rate values from Table 3-3.

** Flood control detention volume credits based on empirical equations from Storage Chapter of USDCM.

*** Method assumes that 1-hour rainfall depth is equivalent to 1-hour intensity for calculation purposed

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

Project: WATERBURY

Basin ID: POND 3 DP 29

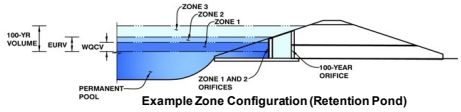

Example Zone Configuration (Retention Pond)

Watershed Information

Selected BMP Type =	EDB	
Watershed Area =	82.44	acres
Watershed Length =	1,900	ft
Watershed Length to Centroid =	450	ft
Watershed Slope =	0.026	ft/ft
Watershed Imperviousness =	48.98%	percent
Percentage Hydrologic Soil Group A =	100.0%	percent
Percentage Hydrologic Soil Group B =	0.0%	percent
Percentage Hydrologic Soil Groups C/D =	0.0%	percent
Target WQCV Drain Time =	40.0	hours
Location for 1-hr Rainfall Depths =	User Input	

After providing required inputs above including 1-hour rainfall depths, click 'Run CUHP' to generate runoff hydrographs using the embedded Colorado Urban Hydrograph Procedure.

			Optional User Overrides	
Water Quality Capture Volume (WQCV) =	1.398	acre-feet		acre-feet
Excess Urban Runoff Volume (EURV) =	4.629	acre-feet		acre-feet
2-yr Runoff Volume (P1 = 1.19 in.) =	3.415	acre-feet	1.19	inches
5-yr Runoff Volume (P1 = 1.5 in.) =	4.541	acre-feet	1.50	inches
10-yr Runoff Volume (P1 = 1.75 in.) =	5.445	acre-feet	1.75	inches
25-yr Runoff Volume (P1 = 2 in.) =	6.891	acre-feet	2.00	inches
50-yr Runoff Volume (P1 = 2.25 in.) =	8.301	acre-feet	2.25	inches
100-yr Runoff Volume (P1 = 2.52 in.) =	10.096	acre-feet	2.52	inches
500-yr Runoff Volume (P1 = 3 in.) =	13.064	acre-feet	3.00	inches
Approximate 2-yr Detention Volume =	2.974	acre-feet		
Approximate 5-yr Detention Volume =	3.917	acre-feet		
Approximate 10-yr Detention Volume =	4.785	acre-feet		
Approximate 25-yr Detention Volume =	5.861	acre-feet		
Approximate 50-yr Detention Volume =	6.549	acre-feet		
Approximate 100-yr Detention Volume =	7.398	acre-feet		

Define Zones and Basin Geometry

Zone 1 Volume (WQCV) =	1.398	acre-feet
Zone 2 Volume (EURV - Zone 1) =	3.231	acre-feet
Zone 3 Volume (100-year - Zones 1 & 2) =	2.769	acre-feet
Total Detention Basin Volume =	7.398	acre-feet
Initial Surcharge Volume (ISV) =	user	ft^3
Initial Surcharge Depth (ISD) =	user	ft
Total Available Detention Depth (H_{total}) =	user	ft
Depth of Trickle Channel (H_{TC}) =	user	ft
Slope of Trickle Channel (S_{TC}) =	user	ft/ft
Slopes of Main Basin Sides (S_{main}) =	user	H:V
Basin Length-to-Width Ratio ($R_{L/W}$) =	user	

Initial Surcharge Area (A_{ISV}) =	user	ft^2
Surcharge Volume Length (L_{ISV}) =	user	ft
Surcharge Volume Width (W_{ISV}) =	user	ft
Depth of Basin Floor (H_{FLOOR}) =	user	ft
Length of Basin Floor (L_{FLOOR}) =	user	ft
Width of Basin Floor (W_{FLOOR}) =	user	ft
Area of Basin Floor (A_{FLOOR}) =	user	ft^2
Volume of Basin Floor (V_{FLOOR}) =	user	ft^3
Depth of Main Basin (H_{MAIN}) =	user	ft
Length of Main Basin (L_{MAIN}) =	user	ft
Width of Main Basin (W_{MAIN}) =	user	ft
Area of Main Basin (A_{MAIN}) =	user	ft^2
Volume of Main Basin (V_{MAIN}) =	user	ft^3
Calculated Total Basin Volume (V_{total}) =	**user**	acre-feet

Depth Increment = ft

Stage - Storage Description	Stage (ft)	Optional Override Stage (ft)	Length (ft)	Width (ft)	Area (ft^2)	Optional Override Area (ft^2)	Area (acre)	Volume (ft^3)	Volume (ac-ft)
Top of Micropool	--	0.00	--	--	--	100	0.002		
6922.25	--	0.25	--	--	--	2,785	0.064	360	0.008
6922.50	--	0.50	--	--	--	5,470	0.126	1,392	0.032
6922.75	--	0.75	--	--	--	8,155	0.187	3,095	0.071
6923.00	--	1.00	--	--	--	10,844	0.249	5,470	0.126
6923.25	--	1.25	--	--	--	13,525	0.310	8,516	0.196
6923.50	--	1.50	--	--	--	16,210	0.372	12,233	0.281
6923.75	--	1.75	--	--	--	18,895	0.434	16,621	0.382
6924.00	--	2.00	--	--	--	21,580	0.495	21,681	0.498
6924.25	--	2.25	--	--	--	29,550	0.678	28,072	0.644
6924.50	--	2.50	--	--	--	37,520	0.861	36,456	0.837
6924.75	--	2.75	--	--	--	45,490	1.044	46,832	1.075
6925.00	--	3.00	--	--	--	53,460	1.227	59,201	1.359
6925.25	--	3.25	--	--	--	61,430	1.410	73,562	1.689
6925.50	--	3.50	--	--	--	69,399	1.593	89,915	2.064
6925.75	--	3.75	--	--	--	77,369	1.776	108,261	2.485
6926.00	--	4.00	--	--	--	85,339	1.959	128,600	2.952
6926.25	--	4.25	--	--	--	86,506	1.986	150,081	3.445
6926.50	--	4.50	--	--	--	87,672	2.013	171,853	3.945
6926.75	--	4.75	--	--	--	88,389	2.029	193,860	4.450
6927.00	--	5.00	--	--	--	90,005	2.066	216,160	4.962
6927.25	--	5.25	--	--	--	91,172	2.093	238,807	5.482
6927.50	--	5.50	--	--	--	92,338	2.120	261,746	6.009
6927.75	--	5.75	--	--	--	93,505	2.147	284,976	6.542
6928.00	--	6.00	--	--	--	94,671	2.173	308,498	7.082
6928.25	--	6.25	--	--	--	95,873	2.201	332,316	7.629
6928.50	--	6.50	--	--	--	97,075	2.229	356,434	8.183
6928.75	--	6.75	--	--	--	98,726	2.266	380,910	8.744
6929.00	--	7.00	--	--	--	99,478	2.284	405,685	9.313
6929.25	--	7.25	--	--	--	100,680	2.311	430,705	9.888
6929.50	--	7.50	--	--	--	101,881	2.339	456,025	10.469
6929.75	--	7.75	--	--	--	103,083	2.366	481,645	11.057
6930.00	--	8.00	--	--	--	104,285	2.394	507,566	11.652

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.03 (May 2020)

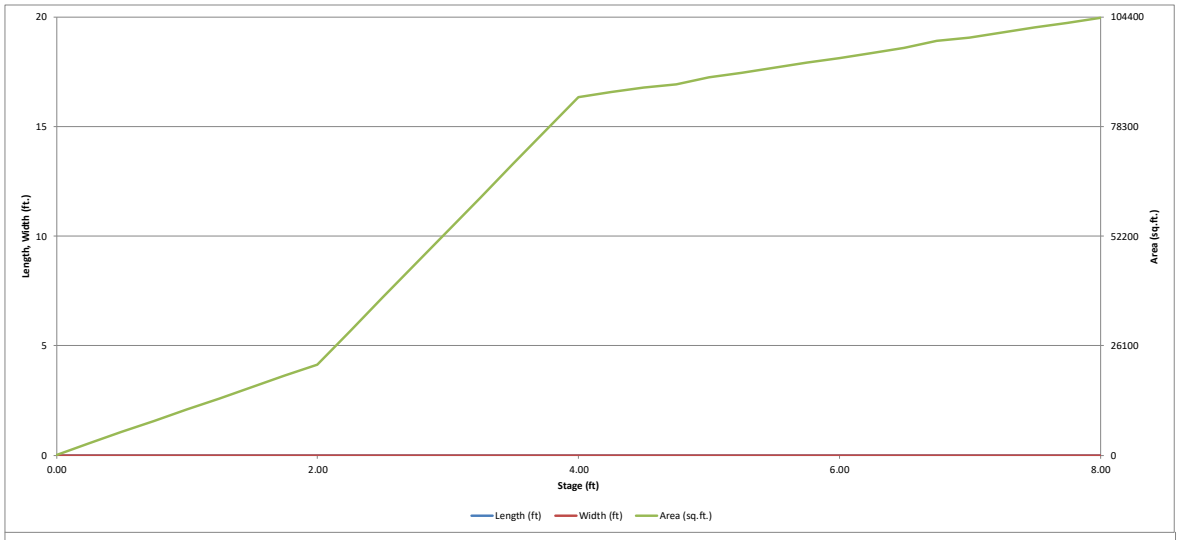

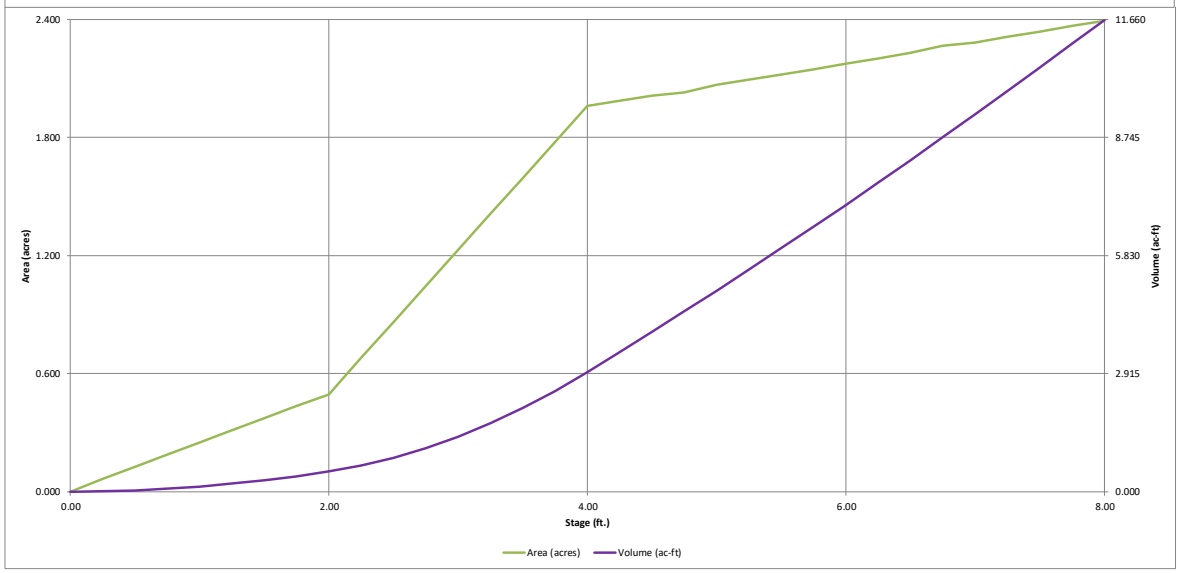

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.03 (May 2020)

Project: **WATERBURY**

Basin ID: **POND 3 DP 29**

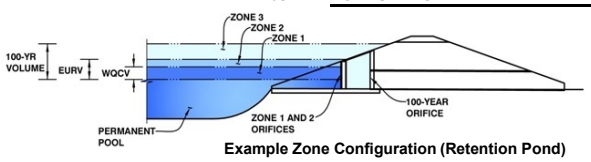

Example Zone Configuration (Retention Pond)

	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	3.04	1.398	Orifice Plate
Zone 2 (EURV)	4.84	3.231	Orifice Plate
Zone 3 (100-year)	6.15	2.769	Weir&Pipe (Restrict)
Total (all zones)		7.398	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth =	N/A	ft (distance below the filtration media surface)	Underdrain Orifice Area =	N/A	ft^2
Underdrain Orifice Diameter =	N/A	inches	Underdrain Orifice Centroid =	N/A	feet

Calculated Parameters for Underdrain

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Invert of Lowest Orifice =	0.00	ft (relative to basin bottom at Stage = 0 ft)	WQ Orifice Area per Row =	4.778E-02	ft^2
Depth at top of Zone using Orifice Plate =	4.85	ft (relative to basin bottom at Stage = 0 ft)	Elliptical Half-Width =	N/A	feet
Orifice Plate: Orifice Vertical Spacing =	19.40	inches	Elliptical Slot Centroid =	N/A	feet
Orifice Plate: Orifice Area per Row =	6.88	sq. inches (use rectangular openings)	Elliptical Slot Area =	N/A	ft^2

Calculated Parameters for Plate

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	1.62	3.23					
Orifice Area (sq. inches)	6.88	6.88	6.88					

	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

	Not Selected	Not Selected			Not Selected	Not Selected	
Invert of Vertical Orifice =	N/A	N/A	ft (relative to basin bottom at Stage = 0 ft)	Vertical Orifice Area =	N/A	N/A	ft^2
Depth at top of Zone using Vertical Orifice =	N/A	N/A	ft (relative to basin bottom at Stage = 0 ft)	Vertical Orifice Centroid =	N/A	N/A	feet
Vertical Orifice Diameter =	N/A	N/A	inches				

Calculated Parameters for Vertical Orifice

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir (and No Outlet Pipe))

	Zone 3 Weir	Not Selected			Zone 3 Weir	Not Selected	
Overflow Weir Front Edge Height, Ho =	4.85	N/A	ft (relative to basin bottom at Stage = 0 ft)	Height of Grate Upper Edge, H_t =	4.85	N/A	feet
Overflow Weir Front Edge Length =	10.00	N/A	feet	Overflow Weir Slope Length =	4.00	N/A	feet
Overflow Weir Grate Slope =	0.00	N/A	H:V	Grate Open Area / 100-yr Orifice Area =	5.10	N/A	
Horiz. Length of Weir Sides =	4.00	N/A	feet	Overflow Grate Open Area w/o Debris =	28.00	N/A	ft^2
Overflow Grate Open Area % =	70%	N/A	%, grate open area/total area	Overflow Grate Open Area w/ Debris =	14.00	N/A	ft^2
Debris Clogging % =	50%	N/A	%				

Calculated Parameters for Overflow Weir

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

	Zone 3 Restrictor	Not Selected			Zone 3 Restrictor	Not Selected	
Depth to Invert of Outlet Pipe =	0.10	N/A	ft (distance below basin bottom at Stage = 0 ft)	Outlet Orifice Area =	5.49	N/A	ft^2
Outlet Pipe Diameter =	36.00	N/A	inches	Outlet Orifice Centroid =	1.21	N/A	feet
Restrictor Plate Height Above Pipe Invert =	26.10		inches	Half-Central Angle of Restrictor Plate on Pipe =	2.04	N/A	radians

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage=	6.10	ft (relative to basin bottom at Stage = 0 ft)	Spillway Design Flow Depth=	0.99	feet
Spillway Crest Length =	80.00	feet	Stage at Top of Freeboard =	7.98	feet
Spillway End Slopes =	3.00	H:V	Basin Area at Top of Freeboard =	2.39	acres
Freeboard above Max Water Surface =	0.89	feet	Basin Volume at Top of Freeboard =	11.58	acre-ft

Calculated Parameters for Spillway

Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

Design Storm Return Period =	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
One-Hour Rainfall Depth (in) =	N/A	N/A	1.19	1.50	1.75	2.00	2.25	2.52	3.00
CUHP Runoff Volume (acre-ft) =	1.398	4.629	3.415	4.541	5.445	6.891	8.301	10.096	13.064
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	3.415	4.541	5.445	6.891	8.301	10.096	13.064
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A	1.1	2.3	3.1	27.2	53.4	86.5	137.6
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A	N/A							
Predevelopment Unit Peak Flow, q (cfs/acre) =	N/A	N/A	0.01	0.03	0.04	0.33	0.65	1.05	1.67
Peak Inflow Q (cfs) =	N/A	N/A	72.9	99.5	122.8	160.6	202.7	247.2	319.2
Peak Outflow Q (cfs) =	0.7	1.2	1.1	1.2	6.7	17.7	35.1	58.0	116.6
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A	0.5	2.2	0.7	0.7	0.7	0.8
Structure Controlling Flow =	Plate	Plate	Plate	Plate	Overflow Weir 1	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Spillway
Max Velocity through Grate 1 (fps) =	N/A	N/A	N/A	N/A	0.2	0.6	1.2	2.0	2.1
Max Velocity through Grate 2 (fps) =	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours) =	38	73	62	72	76	74	72	70	67
Time to Drain 99% of Inflow Volume (hours) =	**40**	78	66	78	82	81	80	79	78
Maximum Ponding Depth (ft) =	3.04	4.84	4.16	4.71	5.05	5.27	5.53	5.93	6.47
Area at Maximum Ponding Depth (acres) =	1.26	2.04	1.98	2.03	2.07	2.10	2.12	2.17	2.23
Maximum Volume Stored (acre-ft) =	1.409	4.634	3.247	4.349	5.066	5.524	6.051	6.930	8.116

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.00 (December 2019)

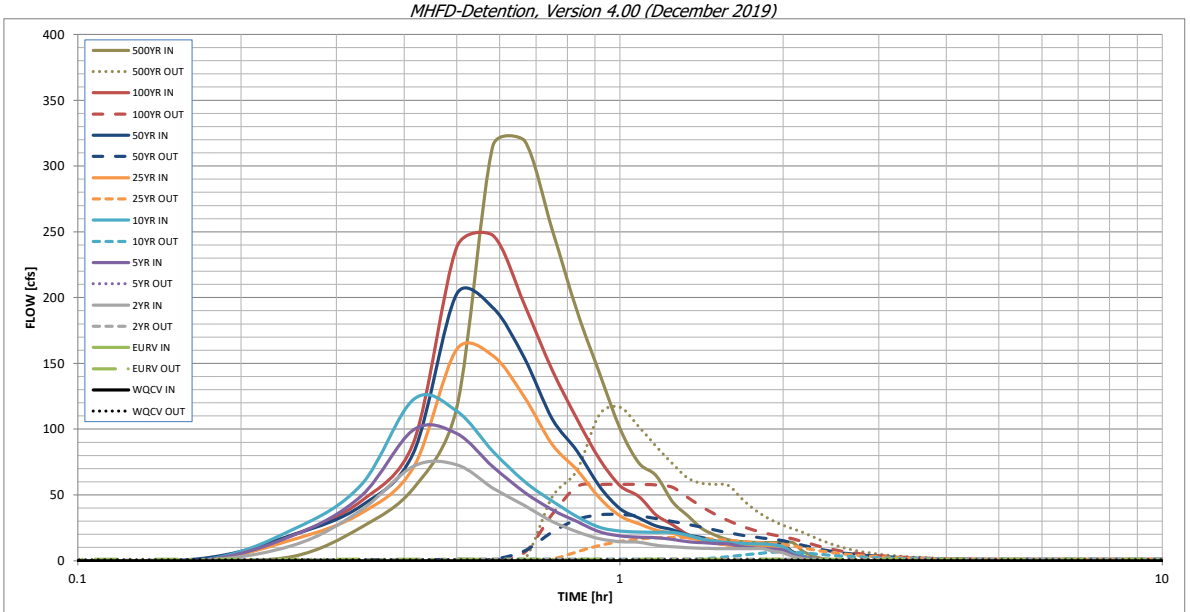

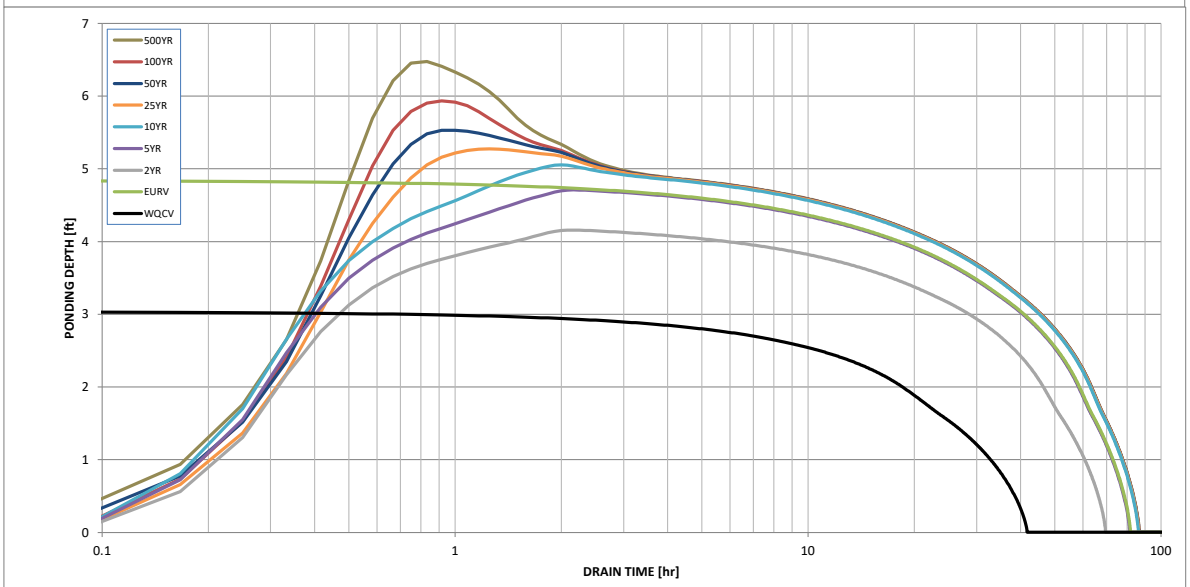

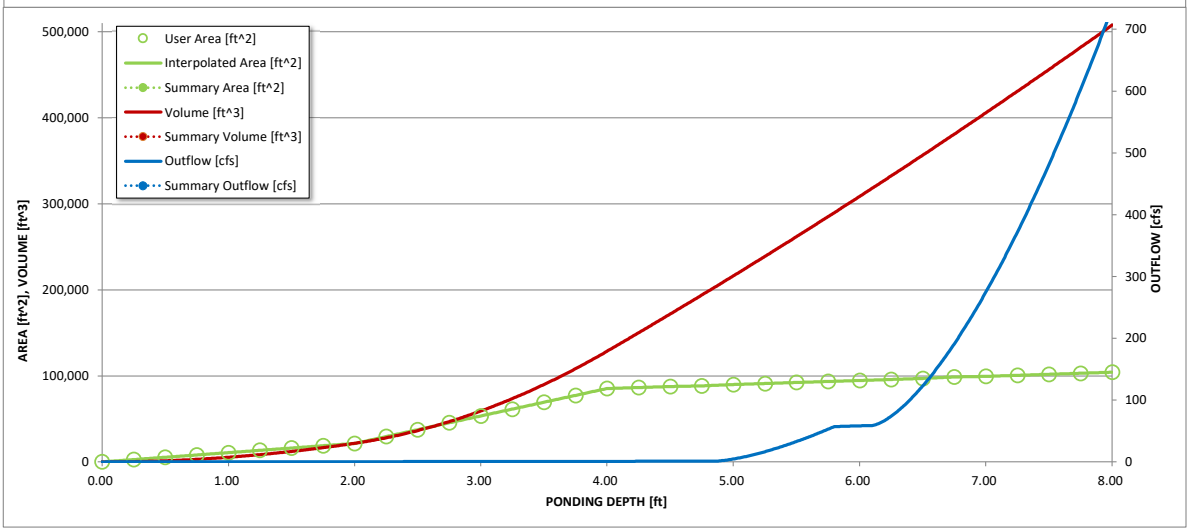

S-A-V-D Chart Axis Override	X-axis	Left Y-Axis	Right Y-Axis
minimum bound			
maximum bound			

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: _____

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
Time Interval	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	0.14	3.40
	0:15:00	0.00	0.00	11.84	19.24	23.93	16.13	19.76	19.71	25.41
	0:20:00	0.00	0.00	38.47	49.26	57.67	36.15	41.70	45.37	55.31
	0:25:00	0.00	0.00	71.90	99.51	122.76	71.44	82.68	90.48	116.27
	0:30:00	0.00	0.00	72.87	96.62	113.69	160.63	202.71	238.31	315.30
	0:35:00	0.00	0.00	55.17	71.29	83.09	155.84	192.39	247.17	319.17
	0:40:00	0.00	0.00	41.86	52.06	60.13	124.23	153.76	194.38	251.85
	0:45:00	0.00	0.00	29.85	38.68	45.34	88.38	108.00	144.98	189.78
	0:50:00	0.00	0.00	21.98	29.77	33.50	68.94	83.41	107.69	142.73
	0:55:00	0.00	0.00	16.71	22.00	25.41	47.81	56.67	77.35	100.69
	1:00:00	0.00	0.00	14.54	18.88	22.56	34.08	39.57	57.15	74.42
	1:05:00	0.00	0.00	13.90	17.89	21.84	28.04	32.52	48.85	64.68
	1:10:00	0.00	0.00	11.69	17.49	21.54	23.14	26.47	34.78	44.87
	1:15:00	0.00	0.00	10.54	16.06	21.44	20.71	23.51	27.30	34.27
	1:20:00	0.00	0.00	9.84	14.50	19.40	17.34	19.60	19.81	24.41
	1:25:00	0.00	0.00	9.47	13.63	16.46	15.68	17.70	15.86	19.30
	1:30:00	0.00	0.00	9.23	13.13	14.73	13.32	15.00	13.38	16.05
	1:35:00	0.00	0.00	9.11	12.84	13.74	12.03	13.52	12.17	14.48
	1:40:00	0.00	0.00	9.11	10.93	13.16	11.32	12.73	11.77	14.01
	1:45:00	0.00	0.00	9.11	9.87	12.83	10.96	12.33	11.59	13.80
	1:50:00	0.00	0.00	9.11	9.26	12.73	10.80	12.15	11.59	13.80
	1:55:00	0.00	0.00	7.13	8.93	12.15	10.73	12.07	11.59	13.80
	2:00:00	0.00	0.00	5.98	8.22	10.64	10.73	12.07	11.59	13.80
	2:05:00	0.00	0.00	3.31	4.59	5.96	6.02	6.76	6.47	7.68
	2:10:00	0.00	0.00	1.79	2.53	3.25	3.32	3.72	3.55	4.21
	2:15:00	0.00	0.00	0.85	1.29	1.63	1.69	1.89	1.80	2.12
	2:20:00	0.00	0.00	0.36	0.63	0.75	0.82	0.91	0.87	1.02
	2:25:00	0.00	0.00	0.12	0.20	0.22	0.26	0.28	0.27	0.31
	2:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	2:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

FSD POND 1
FORBAY VOLUMES

Required Forbay Volume = 3% of WQCV

WQCV =	0.394	ac-ft
WQCV =	17,155	cu-ft
3% of WQCV =	0.01	ac-ft
3% of WQCV =	514.65	cu-ft

POND PR 7

ELEV	*AREA*	*AREA AVG.*	*DELTA ELEV.*	*VOLUME*	*VOLUME TOTAL*
6925.50	198				
		198	1.5	297	
6927.00	198				297

End Area Method: 297 C.F.
0.007 A.F.

POND PR 10

ELEV	*AREA*	*AREA AVG.*	*DELTA ELEV.*	*VOLUME*	*VOLUME TOTAL*
6927.00	198				
		198	1.5	297	
6928.50	198				297

End Area Method: 297 C.F.
0.007 A.F.
TOTAL 594.000 A.F.
TOTAL 0.014 A.F.

FSD POND 2
FORBAY VOLUMES

Required Forbay Volume = 3% of WQCV

WQCV =	0.241	ac-ft
WQCV =	10,513	cu-ft
3% of WQCV =	0.01	ac-ft
3% of WQCV =	315.38	cu-ft

POND PR 17

ELEV	*AREA*	*AREA AVG.*	*DELTA ELEV.*	*VOLUME*	*VOLUME TOTAL*
6900.25	382				
		382	1.5	573	
6901.75	382				573

End Area Method: 573 C.F.
0.013 A.F.

FSD POND 3
FORBAY VOLUMES

Required Forbay Volume = 3% of WQCV

WQCV =	1.398	ac-ft
WQCV =	60,894	cu-ft
3% of WQCV =	0.04	ac-ft
3% of WQCV =	1826.82	cu-ft

POND PR 33

ELEV	*AREA*	*AREA AVG.*	*DELTA ELEV.*	*VOLUME*	*VOLUME TOTAL*
6900.25	900				
		900	1.5	1350	
6901.75	900				1350

End Area Method: 1350 C.F.
0.031 A.F.

POND PR 34A

ELEV	*AREA*	*AREA AVG.*	*DELTA ELEV.*	*VOLUME*	*VOLUME TOTAL*
6900.25	425				
		425	1.5	638	
6901.75	425				638

End Area Method: 638 C.F.
0.015 A.F.

TOTAL 1987.500 A.F.
TOTAL 0.046 A.F.

RUNOFF REDUCTION
& EXCLUDED UNDEVELOPED PERVIOUS AREA

Design Procedure Form: Runoff Reduction

UD-BMP (Version 3.07, March 2018) **Sheet 1 of 1**

Designer:	QUENTIN ARMIJO
Company:	TERRA NOVA ENGINEERING, INC.
Date:	November 19, 2022
Project:	WATERBURY FILING 1 & 2
Location:	BASIN M2 EASTERN CHANNEL DIRECT RELEASE

SITE INFORMATION (User Input in Blue Cells)

WQCV Rainfall Depth: 0.60 inches

Depth of Average Runoff Producing Storm, d_6 = 0.43 inches (for Watersheds Outside of the Denver Region, Figure 3-1 in USDCM Vol. 3)

Area Type	UIA:RPA											
Area ID	M2											
Downstream Design Point ID	EAST CH											
Downstream BMP Type	None											
DCIA (ft^2)	--											
UIA (ft^2)	5,300											
RPA (ft^2)	7,000											
SPA (ft^2)	--											
HSG A (%)	100%											
HSG B (%)	0%											
HSG C/D (%)	0%											
Average Slope of RPA (ft/ft)	0.020											
UIA:RPA Interface Width (ft)	60.00											

CALCULATED RUNOFF RESULTS

Area ID	M2											
UIA:RPA Area (ft^2)	12,300											
L / W Ratio	3.42											
UIA / Area	0.4309											
Runoff (in)	0.00											
Runoff (ft^3)	0											
Runoff Reduction (ft^3)	221											

CALCULATED WQCV RESULTS

Area ID	M2											
WQCV (ft^3)	221											
WQCV Reduction (ft^3)	221											
WQCV Reduction (%)	100%											
Untreated WQCV (ft^3)	0											

CALCULATED DESIGN POINT RESULTS (sums results from all columns with the same Downstream Design Point ID)

Downstream Design Point ID	EAST CH											
DCIA (ft^2)	0											
UIA (ft^2)	5,300											
RPA (ft^2)	7,000											
SPA (ft^2)	0											
Total Area (ft^2)	12,300											
Total Impervious Area (ft^2)	5,300											
WQCV (ft^3)	221											
WQCV Reduction (ft^3)	221											
WQCV Reduction (%)	100%											
Untreated WQCV (ft^3)	0											

CALCULATED SITE RESULTS (sums results from all columns in worksheet)

Total Area (ft^2)	12,300
Total Impervious Area (ft^2)	5,300
WQCV (ft^3)	221
WQCV Reduction (ft^3)	221
WQCV Reduction (%)	100%
Untreated WQCV (ft^3)	0

Design Procedure Form: Runoff Reduction

UD-BMP (Version 3.07, March 2018) **Sheet 1 of 1**

Designer:	**Quentin Armijo**
Company:	**Terra Nova Engineering, Inc.**
Date:	**November 19, 2022**
Project:	**Waterbury Filings 1 & 2**
Location:	*BASIN N WESTERN CHANNEL DIRECT RELEASE.

SITE INFORMATION (User Input in Blue Cells)

WQCV Rainfall Depth: 0.60 inches

Depth of Average Runoff Producing Storm, d_6 = 0.43 inches (for Watersheds Outside of the Denver Region, Figure 3-1 in USDCM Vol. 3)

Area Type	UIA:RPA											
Area ID	N											
Downstream Design Point ID	WEST CH											
Downstream BMP Type	None											
DCIA (ft^2)	--											
UIA (ft^2)	1,105											
RPA (ft^2)	1,895											
SPA (ft^2)	--											
HSG A (%)	100%											
HSG B (%)	0%											
HSG C/D (%)	0%											
Average Slope of RPA (ft/ft)	0.020											
UIA:RPA Interface Width (ft)	60.00											

CALCULATED RUNOFF RESULTS

Area ID	N											
UIA:RPA Area (ft^2)	3,000											
L / W Ratio	0.83											
UIA / Area	0.3683											
Runoff (in)	0.00											
Runoff (ft^3)	0											
Runoff Reduction (ft^3)	46											

CALCULATED WQCV RESULTS

Area ID	N											
WQCV (ft^3)	46											
WQCV Reduction (ft^3)	46											
WQCV Reduction (%)	100%											
Untreated WQCV (ft^3)	0											

CALCULATED DESIGN POINT RESULTS (sums results from all columns with the same Downstream Design Point ID)

Downstream Design Point ID	WEST CH											
DCIA (ft^2)	0											
UIA (ft^2)	1,105											
RPA (ft^2)	1,895											
SPA (ft^2)	0											
Total Area (ft^2)	3,000											
Total Impervious Area (ft^2)	1,105											
WQCV (ft^3)	46											
WQCV Reduction (ft^3)	46											
WQCV Reduction (%)	100%											
Untreated WQCV (ft^3)	0											

CALCULATED SITE RESULTS (sums results from all columns in worksheet)

Total Area (ft^2)	3,000
Total Impervious Area (ft^2)	1,105
WQCV (ft^3)	46
WQCV Reduction (ft^3)	46
WQCV Reduction (%)	100%
Untreated WQCV (ft^3)	0

MDDP PBMP SUMMARY TABLE

BASINS	PBMP TRIB. AREA (AC)	PBMP
A, B1, B2, C, D, E, F, G,1, G2, & K	22.34	FSD POND 1
L1, L2, O1, O2, O3, O4, & OS-4	21.06	FSD POND 2
Q1, OS-Q1, Q2, OS-Q2, R, OS-R, S1, OS-S1, S2, OS-S2, T1, T2, OS-T2,U1, U2, 2, V, X, W, OS-1, OS-2, OS-3A, OS-3B, OS- 7, & OS-9	82.44	FSD POND 3
I, J, M1, P, & Y	8.45	EXCLUDED*
M2 & N	0.58	RUNOFF REDUCTION**

*EXCLUDED UNDEVELOPED PERVIOUS AREA
PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 - SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

**UD-BMP VERSION 3.07 RUNOFF REDUCTION WAS USED TO SHOW THAT THIS AREA HAS 100% WQCV REDUCTION BASED UPON THE UNCONNECTED IMPERVIOUS AREA BEING ROUTED OVER THE RECEIVING PERVIOUS AREA.

PDR PBMP SUMMARY TABLE

BASINS	PBMP TRIB. AREA (AC)	PBMP
A, B1, B2, C, D, E, F, G,1, G2, & K	22.34	FSD POND 1
L1, L2, O1, O2, O3 O4, & OS-4	20.23	FSD POND 2
Q1, OS-Q1, Q2, OS-Q2, R, OS-R, S1, OS-S1, S2, OS-S2, T1, T2, OS-T2, U1, U2, V, X, W, & OS- 7	24.41	FSD POND 3
I, J, M1, P, & Y	8.45	EXCLUDED*
M2 & N	0.58	RUNOFF REDUCTION**

*EXCLUDED UNDEVELOPED PERVIOUS AREA
PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 - SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

**UD-BMP VERSION 3.07 RUNOFF REDUCTION WAS USED TO SHOW THAT THIS AREA HAS 100% WQCV REDUCTION BASED UPON THE UNCONNECTED IMPERVIOUS AREA BEING ROUTED OVER THE RECEIVING PERVIOUS AREA.

HEC-RAS ANALYSIS

TABLE 10-1

COMPOSITE ROUGHNESS COEFFICIENTS FOR UNLINED OPEN CHANNELS
(Reference: Chow, Ven Te, 1959; Open-Channel Hydraulics)

$$n = (n_o + n_1 + n_2 + n_3 + n_4)m \qquad (10\text{-}2)$$

	Channel Conditions	Value
Material Type n_o	Earth	0.020
	Fine Gravel	0.024
	Coarse Gravel	0.028
Degree of Irregularity n_1	Smooth	0.000
	Minor	0.005
	Moderate	0.010
	Severe	0.020
Variation of Channel Cross Section n_2	Gradual	0.000
	Alternating Occasionally	0.005
	Alternating Frequently	0.010 - 0.015
Relative Effect of Obstructions n_3	Negligible	0.000
	Minor	0.010 - 0.015
	Appreciable	0.020 - 0.030
	Severe	0.040 - 0.060
Vegetation n_4	Low	0.005 - 0.010
	Medium	0.010 - 0.025
	High	0.025 - 0.050
	Very High	0.050 - 0.100
Degree of Meandering m	Minor	1.000 - 1.200
	Appreciable	1.200 - 1.500
	Severe	1.500

TABLE 10-2 (Continued)

TYPICAL ROUGHNESS COEFFICIENTS FOR OPEN CHANNELS

Type of Channel and Description	Minimum	Normal	Maximum
NATURAL STREAMS			
Minor streams (top width at flood stage 100 ft)			
a. Streams on plain			
1. Clean, straight, full stage, no rifts or deep pools	0.025	0.030	0.033
2. Same as above, but more stones and weeds	0.030	0.035	0.040
3. Clean, winding, some pools and shoals	0.033	0.040	0.045
4. Same as above, but some weeds and stones	0.035	0.045	0.050
5. Same as above, lower stages, more ineffective slopes and sections	0.040	0.048	0.055
6. Same as 4, but more stones	0.045	0.050	0.060
7. Sluggish reaches, weedy, deep pools	0.050	0.070	0.080
8. Very weedy reaches, deep pools, or floodways with heavy stand of timber and underbrush	0.075	0.100	0.150
LINED OR BUILT-UP CHANNELS			
a. Corrugated Metal	0.021	0.025	0.030
b. Concrete			
1. Trowel finish	0.011	0.013	0.015
2. Float finish	0.013	0.015	0.016
3. Finished, with gravel on bottom	0.015	0.017	0.020
4. Unfinished	0.014	0.017	0.020
5. Gunite, good section	0.016	0.019	0.023
6. Gunite, wavy section	0.018	0.022	0.025
7. On good excavated rock	0.017	0.020	
8. On irregular excavated rock	0.022	0.027	

Table 3. Adjustment values for factors that affect roughness of flood plains

[Modified from Aldridge and Garrett, 1973, table 2]

Flood-plain conditions		*n* value adjustment	Example
Degree of irregularity (n_1)	Smooth	0.000	Compares to the smoothest, flattest flood plain attainable in a given bed material.
	Minor	0.001–0.005	Is a flood plain slightly irregular in shape. A few rises and dips or sloughs may be visible on the flood plain.
	Moderate	0.006–0.010	Has more rises and dips. Sloughs and hummocks may occur.
	Severe	0.011–0.020	Flood plain very irregular in shape. Many rises and dips or sloughs are visible. Irregular ground surfaces in pastureland and furrows perpendicular to the flow are also included.
Variation of flood-plain cross section (n_2)		0.0	Not applicable.
Effect of obstructions (n_3)	Negligible	0.000–0.004	Few scattered obstructions, which include debris deposits, stumps, exposed roots, logs, or isolated boulders, occupy less than 5 percent of the cross-sectional area.
	Minor	0.005–0.019	Obstructions occupy less than 15 percent of the cross-sectional area.
	Appreciable	0.020–0.030	Obstructions occupy from 15 to 50 percent of the cross-sectional area.
Amount of vegetation (n_4)	Small	0.001–0.010	Dense growth of flexible turf grass, such as Bermuda, or weeds growing where the average depth of flow is at least two times the height of the vegetation, or supple tree seedlings such as willow, cottonwood, arrowweed, or saltcedar growing where the average depth of flow is at least three times the height of the vegetation.
	Medium	0.011–0.025	Turf grass growing where the average depth of flow is from one to two times the height of the vegetation, or moderately dense stemmy grass, weeds, or tree seedlings growing where the average depth of flow is from two to three times the height of the vegetation; brushy, moderately dense vegetation, similar to 1- to 2-year-old willow trees in the dormant season.
	Large	0.025–0.050	Turf grass growing where the average depth of flow is about equal to the height of the vegetation, or 8- to 10-year-old willow or cottonwood trees intergrown with some weeds and brush (none of the vegetation in foliage) where the hydraulic radius exceeds 2 ft, or mature row crops such as small vegetables, or mature field crops where depth of flow is at least twice the height of the vegetation.
	Very large	0.050–0.100	Turf grass growing where the average depth of flow is less than half the height of the vegetation, or moderate to dense brush, or heavy stand of timber with few down trees and little undergrowth where depth of flow is below branches, or mature field crops where depth of flow is less than the height of the vegetation.
	Extreme	0.100–0.200	Dense bushy willow, mesquite, and saltcedar (all vegetation in full foliage), or heavy stand of timber, few down trees, depth of flow reaching branches.
Degree of meander (m)		1.0	Not applicable.

Chow (1959) presents a table showing minimum, normal, and maximum values of n for flood plains covered by pasture and crops. These values are helpful for comparing the roughness values of flood plains having similar vegetation.

Vegetation-Density Method

For a wooded flood plain, the vegetation-density method can be used as an alternative to the previous method for determining n values for flood plains. In a wooded flood plain, where the tree diameters can be measured, the vegetation density of the flood plain can be determined.

Determining the vegetation density is an effective way of relating plant height and density characteristics, as a function of depth of flow, to the flow resistance of vegetation. Application of the flow-resistance model presented below requires an estimate of the vegetation density as a function of depth of flow. The procedure requires a direct or indirect determination of vegetation density at a given depth. If the change in n value through a range in depth is required, then an estimation of vegetation density through that range is necessary.

Techniques for Determining Vegetation Density

Petryk and Bosmajian (1975) developed a method of analysis of the vegetation density to determine the rough-

Classification of Vegetal Covers

Retardance Class	Cover	Condition
A	Weeping lovegrass	Excellent stand, tall, average 30 in.
	Yellow bluestem Ischaemum	Excellent stand, tall, average 36 in.
B	Bermuda grass	Good stand, tall, average 12 in.
	Native grass mixture (little bluestem, bluestem, blue gamma, and other long and short Midwest grasses	Good stand, unmowed
	Weeping lovegrass	Good stand, tall, average 24 in.
	Lespedeza serica	Good stand, not woody, tall, average 19 in.
	Alfalfa	Good stand uncut, average 11 in.
	Weeping lovegrass	Good stand, unmowed, average 13 in.
	Kudzu	Dense growth, uncut
	Blue gamma	Good stand, uncut, average 13 in.
C	Crabgrass	Fair stand, uncut, avg. 10 in.
	Bermuda grass	Good stand, mowed, average 6 in.
	Common lespedeza	Good stand, uncut, average 11 in.
	Grass-legume mixture - summer (orchard grass, redtop Italian ryegrass, and common lespedeza)	Good stand, uncut, average 6 to 8 in.
	Centipedegrass	Very dense cover, average 6 in.
	Kentucky Bluegrass	Good stand, headed, 6 to 12 in.
D	Bermuda grass	Good stand, cut to 2.5 in. height
	Common lespedeza	Excellent stand, uncut, average 4.5 in.
	Buffalo Grass	Good stand, uncut, 3 t 6 in.
	Grass-legume mixture - fall (orchard grass, redtop Italian ryegrass, and common lespedeza)	Good stand, uncut, 3 to 5 in.
	Lespedeza serica	After cutting to 2 in. height, good stand before cutting
E	Bermuda grass	Good stand, cut to average 1.5 in. height
	Bermuda grass	Burned stubble

Note: Covers classified have been tested in experimental channels. Covers were green and generally uniform.

Source: HEC-15

Coefficients for Roughness of Grass-Lined Channels

SCS Retardance Class	C_n
A	0.605
B	0.418
C	0.220
D	0.147
E	0.093

Source: HEC-15

Composite Roughness

Culverts using different materials for portions of the perimeter such as embedded culverts or culverts with an invert liner should use a composite Manning's n value. A weighted n value based on the materials can be derived using the following equation:

$$n_c = \left[\frac{\Sigma(p_i n_i^{1.5})}{p}\right]^{0.67}$$

Where:
n_c = Composite/weighted Manning's n.
p_i = Wetted perimeter for the material, ft.
n_i = Manning's n value for the material.
p = Total wetted perimeter, ft.

750.1.4.1.2 Hydraulic Radius

The hydraulic radius is a characteristic depth of flow and is defined as the cross-sectional area of flow divided by the wetted perimeter of the channel. The hydraulic radius is computed as follows:

$$R = \frac{A}{P}$$

where:

R = hydraulic radius, ft
A = cross-sectional area of flow, ft^2
P = wetted perimeter of the channel cross section, ft

750.1.4.1.3 Slope

Table 8–8 Characteristics of selected grass species for use in channels and waterways

Grass species	Height at maturity	
	(ft)	(m)
Cool-season grasses		
Creeping foxtail	3–4	0.9–1.2
Crested wheatgrass	2–3	0.6–0.9
Green needlegrass	3–4	0.9–1.2
Russian wild rye	3–4	0.9–1.2
Smooth bromegrass	3–4	0.9–1.2
Tall fescue	3–4	0.9–1.2
Tall wheatgrass		1.2–1.5
Western wheatgrass	2–3	0.6–0.9
Warm-season grasses		
Bermudagrass	3/4–2	0.2–0.6
Big bluestem	4–6	1.2–1.8
Blue grama	1–2	0.3–0.6
Buffalograss	1/3–1	0.1–0.3
Green spangletop	3–4	0.9–1.2
Indiangrass	5–6	1.5–1.8
Klein grass	3–4	0.9–1.2
Little bluestem	3–4	0.9–1.2
Plains bristlegrass	1–2	0.3–0.6
Sand bluestem	5–6	1.5–1.8
Sideoats grama	2–3	0.6–0.9
Switchgrass	4–5	1.2–1.5
Vine mesquitegrass	1–2	0.3–0.6
Weeping lovegrass	3–4	0.9–1.2
Old World bluestems		
Caucasian bluestem	4–5	1.2–1.5
Ganada yellow bluestem	3–4	0.9–1.2

this table were obtained from a review of the available qualitative descriptions and stem counts reported by researchers studying channel resistance and stability.

Since cover conditions vary from year to year and season to season, it is recommended that an upper and lower bound be determined for C_I. The lower bound should be used in stability computations, and the upper bound should be used to determine channel capacity. Some practitioners find that the use of SCS retardance class (table 8–9) is a preferable approach.

The vegetal cover index, C_F, depends primarily on the density and uniformity of density in the immediate vicinity of the soil boundary. Because this parameter is associated with the prevention of local erosion damage which may lead to channel unraveling, the cover factor should represent the weakest area in a reach, rather than the average for the cover species. Recommended values for the cover factor are presented in table 8–10. Values in this table do not account for such considerations as maintenance practices or uniformity of soil fertility or moisture. Therefore, appropriate engineering judgment should be used in its application.

Table 8–9 Retardance curve index by SCS retardance class

SCS retardance class	Retardance curve index
A	10.0
B	7.64
C	5.60
D	4.44
E	2.88

Table 8–10 Properties of grass channel linings values (apply to good uniform stands of each cover)

Cover factor (C_F)	Covers tested	Reference stem density (stems/ft²)	Reference stem density (stems/m²)
0.90	Bermudagrass	500	5,380
	Centipede grass	500	5,380
0.87	Buffalograss	400	4,300
	Kentucky bluegrass	350	3,770
	Blue grama	350	3,770
0.75	Grass mixture	200	2,150
0.50	Weeping lovegrass	350	3,770
	Yellow bluestem	250	2,690
0.50	Alfalfa	500	5,380
	Lespedeza sericea	300	3,280
0.50	Common lespedeza	150	1,610
	Sudangrass	50	538

Multiply the stem densities given by 1/3, 2/3, 1, 4/3, and 5/3 for poor, fair, good, very good, and excellent covers, respectively. Reduce the C_F by 20% for fair stands and 50% for poor stands.

Two soil parameters are required for application of effective stress concepts to the stability design of lined or unlined channels having an erodible soil boundary: soil grain roughness, n_s, and allowable effective stress, τ_a. When the effective stress approach is used, the soil parameters are the same for both lined and unlined channels with negligible bed-material sediment transport.

Soil grain roughness is defined as the roughness associated with particles or aggregates of a size that can be independently moved by the flow at incipient channel failure. For noncohesive soils, the soil grain roughness and effective shear stress are both a function of the D_{75} grain size. When D_{75} is greater than 1.3 millimeter, the soil is considered coarse grained. When D_{75} is less than 1.3 millimeter, the soil is considered fine grained. Fine-grained roughness is considered to have a constant value of 0.0156. Fine-grained effective shear stress is taken to have a constant value of 0.02 pound per square foot. Coarse-grained shear stress and roughness are given in figures 8–21 and 8–22.

A soil grain roughness of 0.0156 is assigned to all cohesive soils. The allowable effective stresses are a function of the unified soil classification system soil type, the plasticity index, and the void ratio. The basic allowable shear stress, τ_{ab}, is determined from the plasticity index and soil classification, and then adjusted by the void ratio correction factor, C_e, using the following equation:

$$\tau_a = \tau_{ab} C_e^2 \qquad \text{(eq. 8–29)}$$

The basic allowable effective stress can be determined from figure 8–23 and the void ratio correction factor from figure 8–24. These two figures were developed directly from the allowable velocity curves in AH 667. Stress partitioning (slope partitioning) is essential to application of figures 8–21 to 8–24, with or without vegetation (Temple et al. 1987).

(e) General design procedure

Use the basic shear stress equation to determine effective shear stress on the soil beneath the vegetation. Use any consistent units of measurement.

$$\tau_e = \gamma d S (1 - C_F) \left(\frac{n_s}{n} \right)^2 \qquad \text{(eq. 8–30)}$$

where:

τ_e = effective shear stress exerted on the soil beneath vegetation (lb/ft^2 or N/m^2)
γ = specific weight of water (lb/ft^3 or N/m^3)
d = maximum depth of flow in the cross section (ft or m)
S = energy slope, dimensionless
C_F = vegetation cover factor (0 for unlined channel), dimensionless
n_s = grain roughness of underlying soil, typically taken as dimensionless
n = roughness coefficient of vegetation, typically taken as dimensionless

The flow depth is used instead of the hydraulic radius because this will result in the maximum local shear stress, rather than the average shear stress. The cover factor is a function of the grass and stem density. Roughness coefficients are standard Manning's roughness values; n_s can be determined from figure 8–22, n can be determined from the old SCS curves (fig. 8–20) or from the following equation.

$$n_R = \exp\left\{ C_I \left[0.0133 (\ln R_v)^2 - 0.0954 \ln R_v + 0.297 \right] - 4.16 \right\} \qquad \text{(eq. 8–31)}$$

where:

R_v = (VR/ν) x 10^{-5} (this dimensionless term reduces to VR for practical application in English units)
V = channel velocity (ft/s or m/s)
R = hydraulic radius (ft or m)

Limited to $0.0025 C_I^{2.5} < R_v < 36$

A reference value of Manning's resistance coefficient, n_R is applicable to vegetation established on relatively smoothly graded fine-grained soil.

If vegetated channel liner mats are used, manufacturer-supplied roughness coefficients for particular mats may be used in the equation.

Maximum allowable shear stress, τ_{va}, in pound per square foot is determined as a function of the retardance curve index, C_I. Very little information is available for vegetal performance under very high stresses and this relation is believed to be conservative.

$$\tau_{va} = 0.75 C_I \qquad \text{(eq. 8–32)}$$

Table 8-3. Design parameters for naturalized channels

Design Parameter	Design Value	Reuslts East Channel	Reuslts West Channel
Maximum 100-year depth outside of bankfull channel	5 ft	< than 5 ft	< than 5 ft
Roughness values Per Table 8-5 used *Herbaceous wetlands (few or no willows)*	0.06 to 0.08	0.6 to 0.8	0.6 to 0.7
Maximum 100-year velocity, main channel (within bankfull channel width) (ft/s)	7 ft/s	3.6 ft/s	5.13 ft/s
Froude No., 100-year, main channel (within bankfull channel width)	0.8	0.76	0.81 (1.02)*
Maximum shear stress, 100-year, main channel (within bankfull channel width) *using shear retardancce*	Class A:10.0lb/sq ft Class B: 7.46 lb/sq ft Class C: 5.6 lb/sq ft	2.59 lb/sq ft	3.94 lb/sq ft*
Minimum bankfull capacity of bankfull channel (based on future development conditions)	70% of 2-year discharge or 10% of 100-yr discharge, whichever is greater	NA Exist. doesn't have bankfull channel	NA Exist. doesn't have bankfull channel
Minimum bankfull channel geometry	Per Table 8-2	NA Exist. doesn't have bankfull channel	NA Exist. doesn't have bankfull channel
Minimum bankfull channel width/depth ratio (Equation 8-3)	9	NA Exist. doesn't have bankfull channel	NA Exist. doesn't have bankfull channel
Minimum entrenchment ratio (Equation 8-4)	3	NA Exist. Channel geometry	NA Exist. Channel geometry
Maximum longitudinal slope of low flow channel (assuming unlined, unvegetated low flow channel)	0.20%	6.06%**	7.91%**
Bankfull channel sinuosity (Equation 8-5)	1.1 to 1.3	NA Exist. doesn't have bankfull channel	NA Exist. doesn't have bankfull channel
Maximum overbank side slope	4(H):1(v)	NA Exist. Channel geometry	NA Exist. Channel geometry
Maximum bankfull side slope	2.5(H):1(V)	NA Exist. doesn't have bankfull channel	NA Exist. doesn't have bankfull channel
Minimum radius of curvature	2.5 times top width	R=90'	R=200'

* ciritical water surface cross sections with existing or proposed stabilization

**Slope is Existing condition. Drop Structure may need to be added at time of Final Drainage Report and Construction Drawings.

Figure 3 VEGETATION COMMUNITY MAP

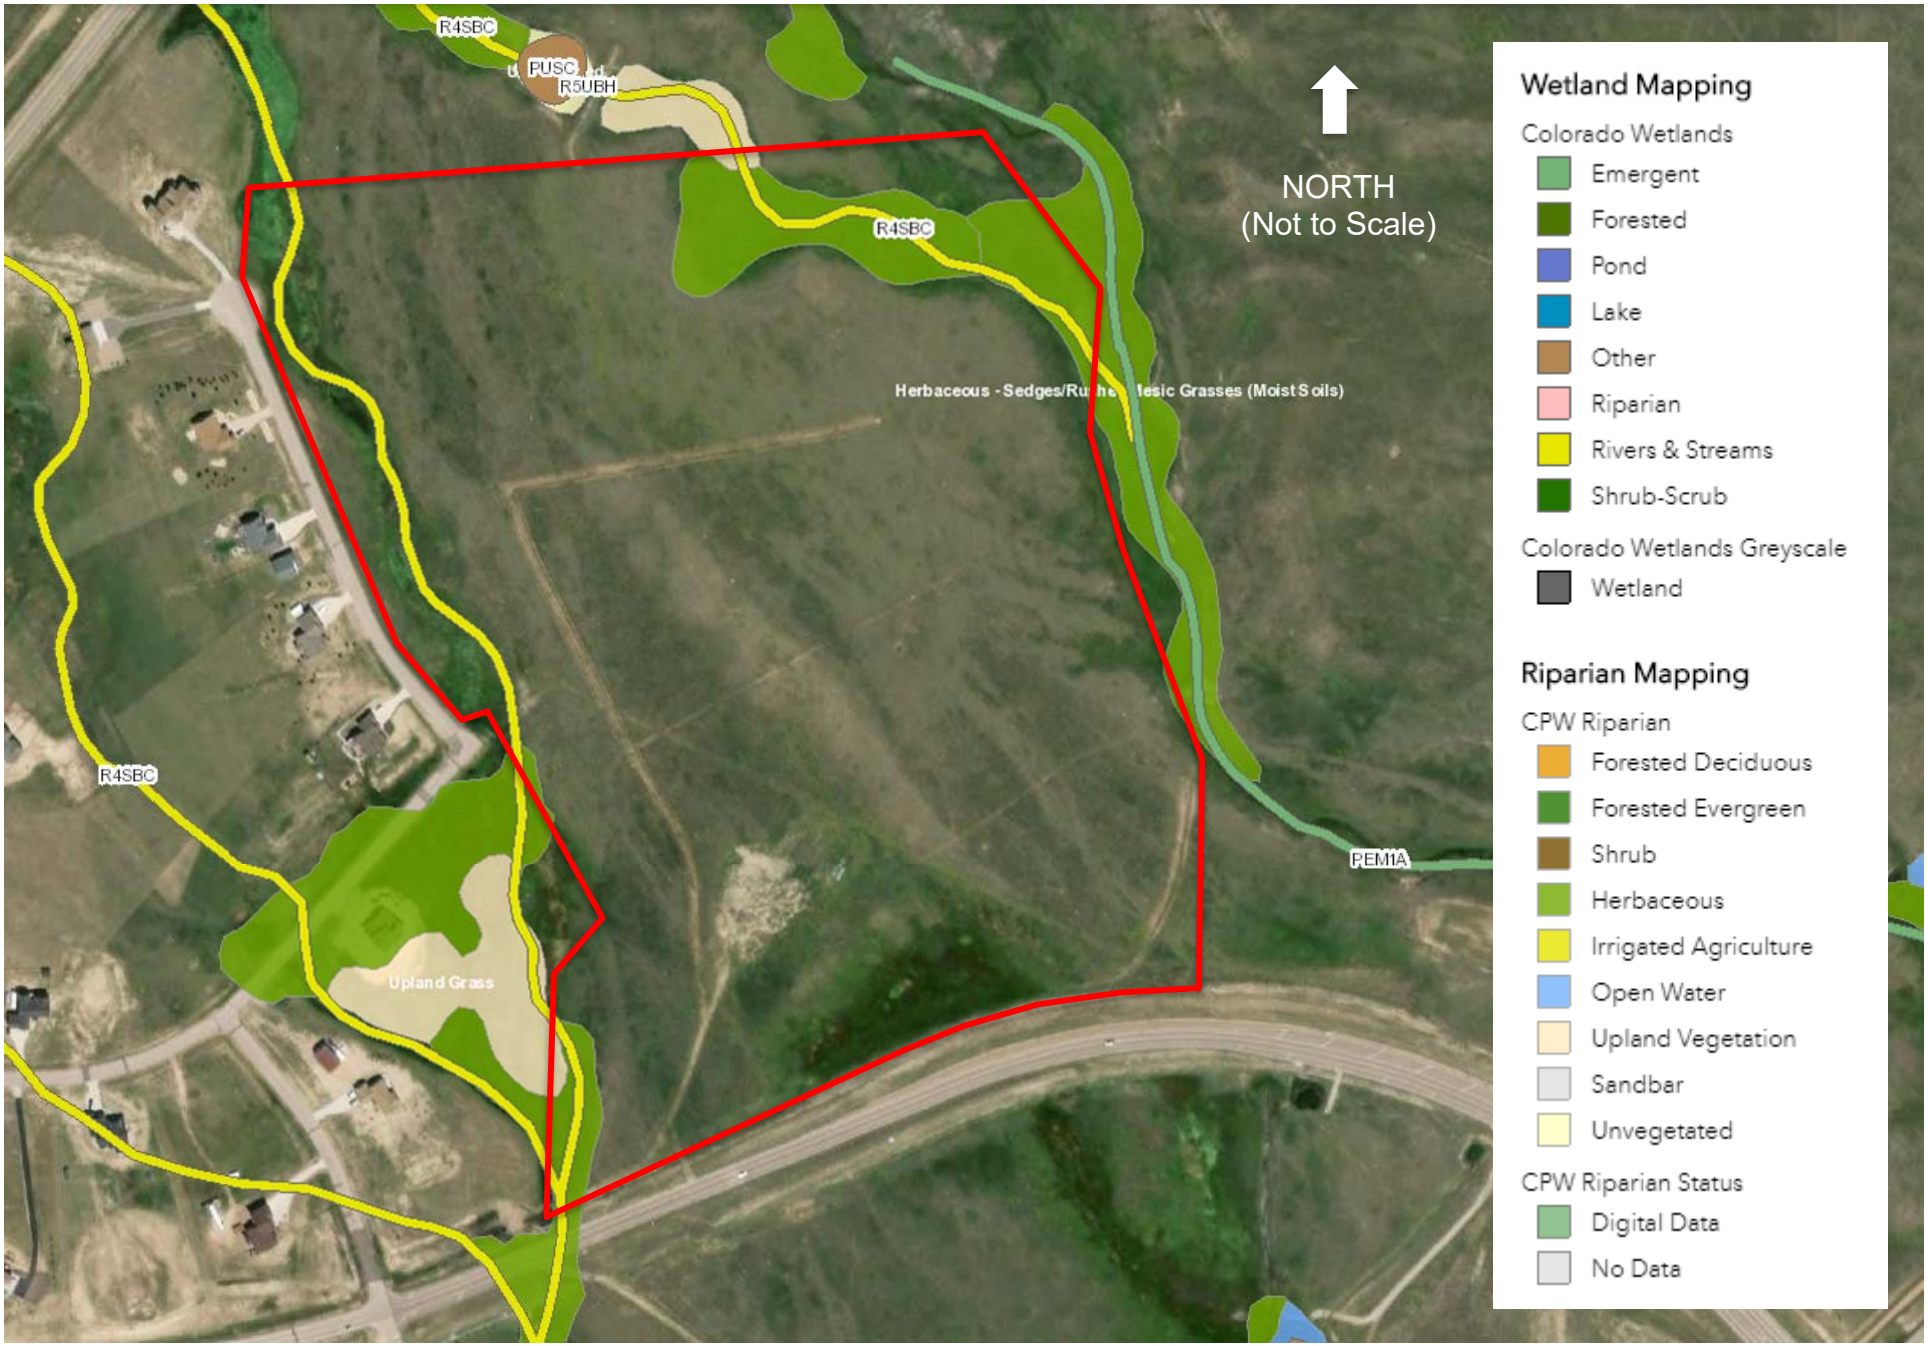

Figure 4 NWI & CNHP WETLAND AND RIPARIAN AREAS MAP

PHOTO LOCATION MAP

PP1 - DRAINAGE A, C-D UPLAND BREAK (LOOKING UPSTREAM FROM LAZOR POINT DRIVE)

PP1 - DRAINAGE A, C-D UPLAND BREAK (LOOKING DOWNSTREAM FROM LAZOR POINT DRIVE)

PP2 - DRAINAGE A, C-D UPLAND BREAK (LOOKING UPSTREAM FROM LAZOR POINT PRIVATE DRIVE)

PP2 - DRAINAGE A, C-D UPLAND BREAK (LOOKING DOWNSTREAM FROM LAZOR POINT PRIVATE DRIVE)

PP3 – WETLAND/CHANNEL B (FROM UPSTREAM END LOOKING SOUTH)

PP4 – WETLAND/CHANNEL B (LOOKING UPSTREAM)

PP4 – WETLAND/CHANNEL B (LOOKING DOWNSTREAM)

PP5– WETLAND/CHANNEL B (LOOKING UPSTREAM)

PP5– WETLAND/CHANNEL B (LOOKING DOWNSTREAM)

PP6– WETLAND/CHANNEL B (LOOKING UPSTREAM)

PP6– WETLAND/CHANNEL B (LOOKING DOWNSTREAM)

PP7– WETLAND/CHANNEL B (LOOKING UPSTREAM)

PP7 – WETLAND/CHANNEL B (LOOKING DOWNSTREAM)

PP8 – WETLAND/CHANNEL B (LOOKING UPSTREAM)

PP8 – WETLAND/CHANNEL B (LOOKING DOWNSTREAM)

PP9 – SITE OVERVIEW FROM SOUTHEAST CORNER (LOOKING WEST)

PP9 – SITE OVERVIEW FROM SOUTHEAST CORNER (LOOKING NORTH)

PP10 – SITE OVERVIEW FROM SOUTHWEST CORNER (LOOKING NORTH)

PP10 – SITE OVERVIEW FROM SOUTHWEST CORNER (LOOKING WEST)

PP11 – SITE OVERVIEW FROM NORTHWEST CORNER (LOOKING EAST)

PP11 – SITE OVERVIEW FROM NORTHWEST CORNER (LOOKING SOUTH)

PP12 – SITE OVERVIEW FROM NORTHEASTCORNER (LOOKING WEST)

PP12 – SITE OVERVIEW FROM NORTHEASTCORNER CORNER (LOOKING SOUTH)

SAMPLE POINT B1 – WETLAND PHOTO (LOOKING UPSTREAM)

SAMPLE POINT B1 – WETLAND PHOTO (LOOKING DOWNSTREAM)

SAMPLE POINT B2 – WETLAND PHOTO (LOOKING UPSTREAM)

SAMPLE POINT B2 – WETLAND PHOTO (LOOKING DOWNSTREAM)

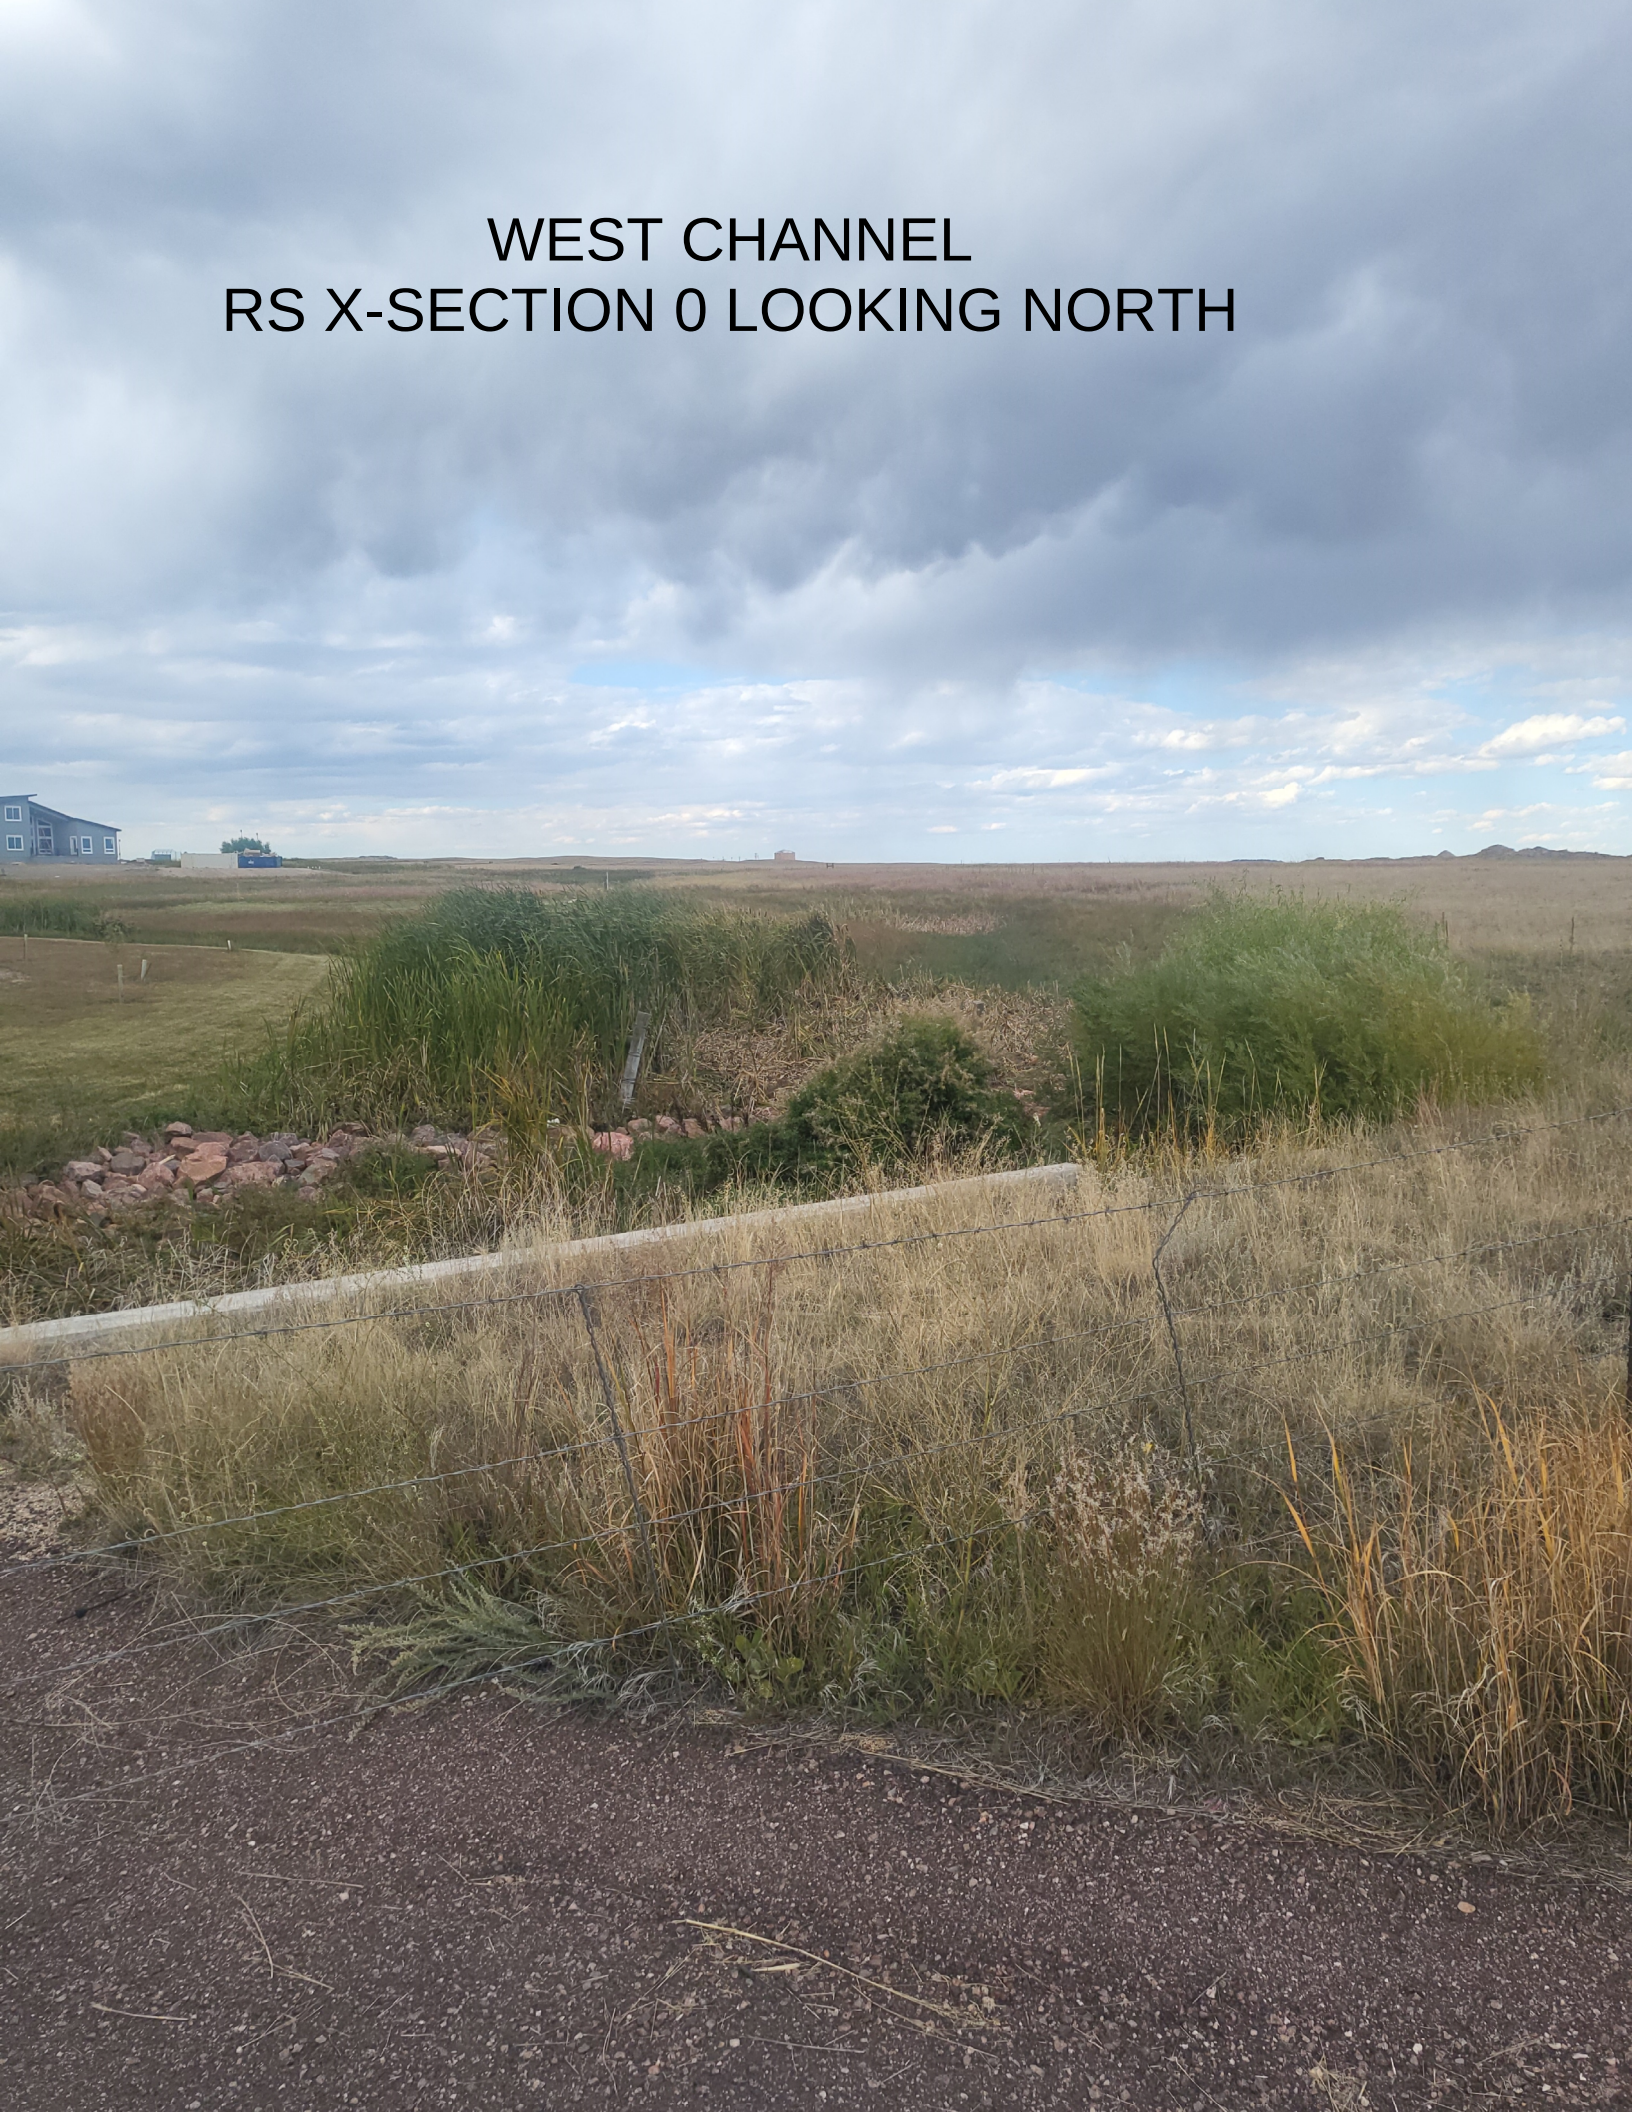
WEST CHANNEL
RS X-SECTION 0 LOOKING NORTH

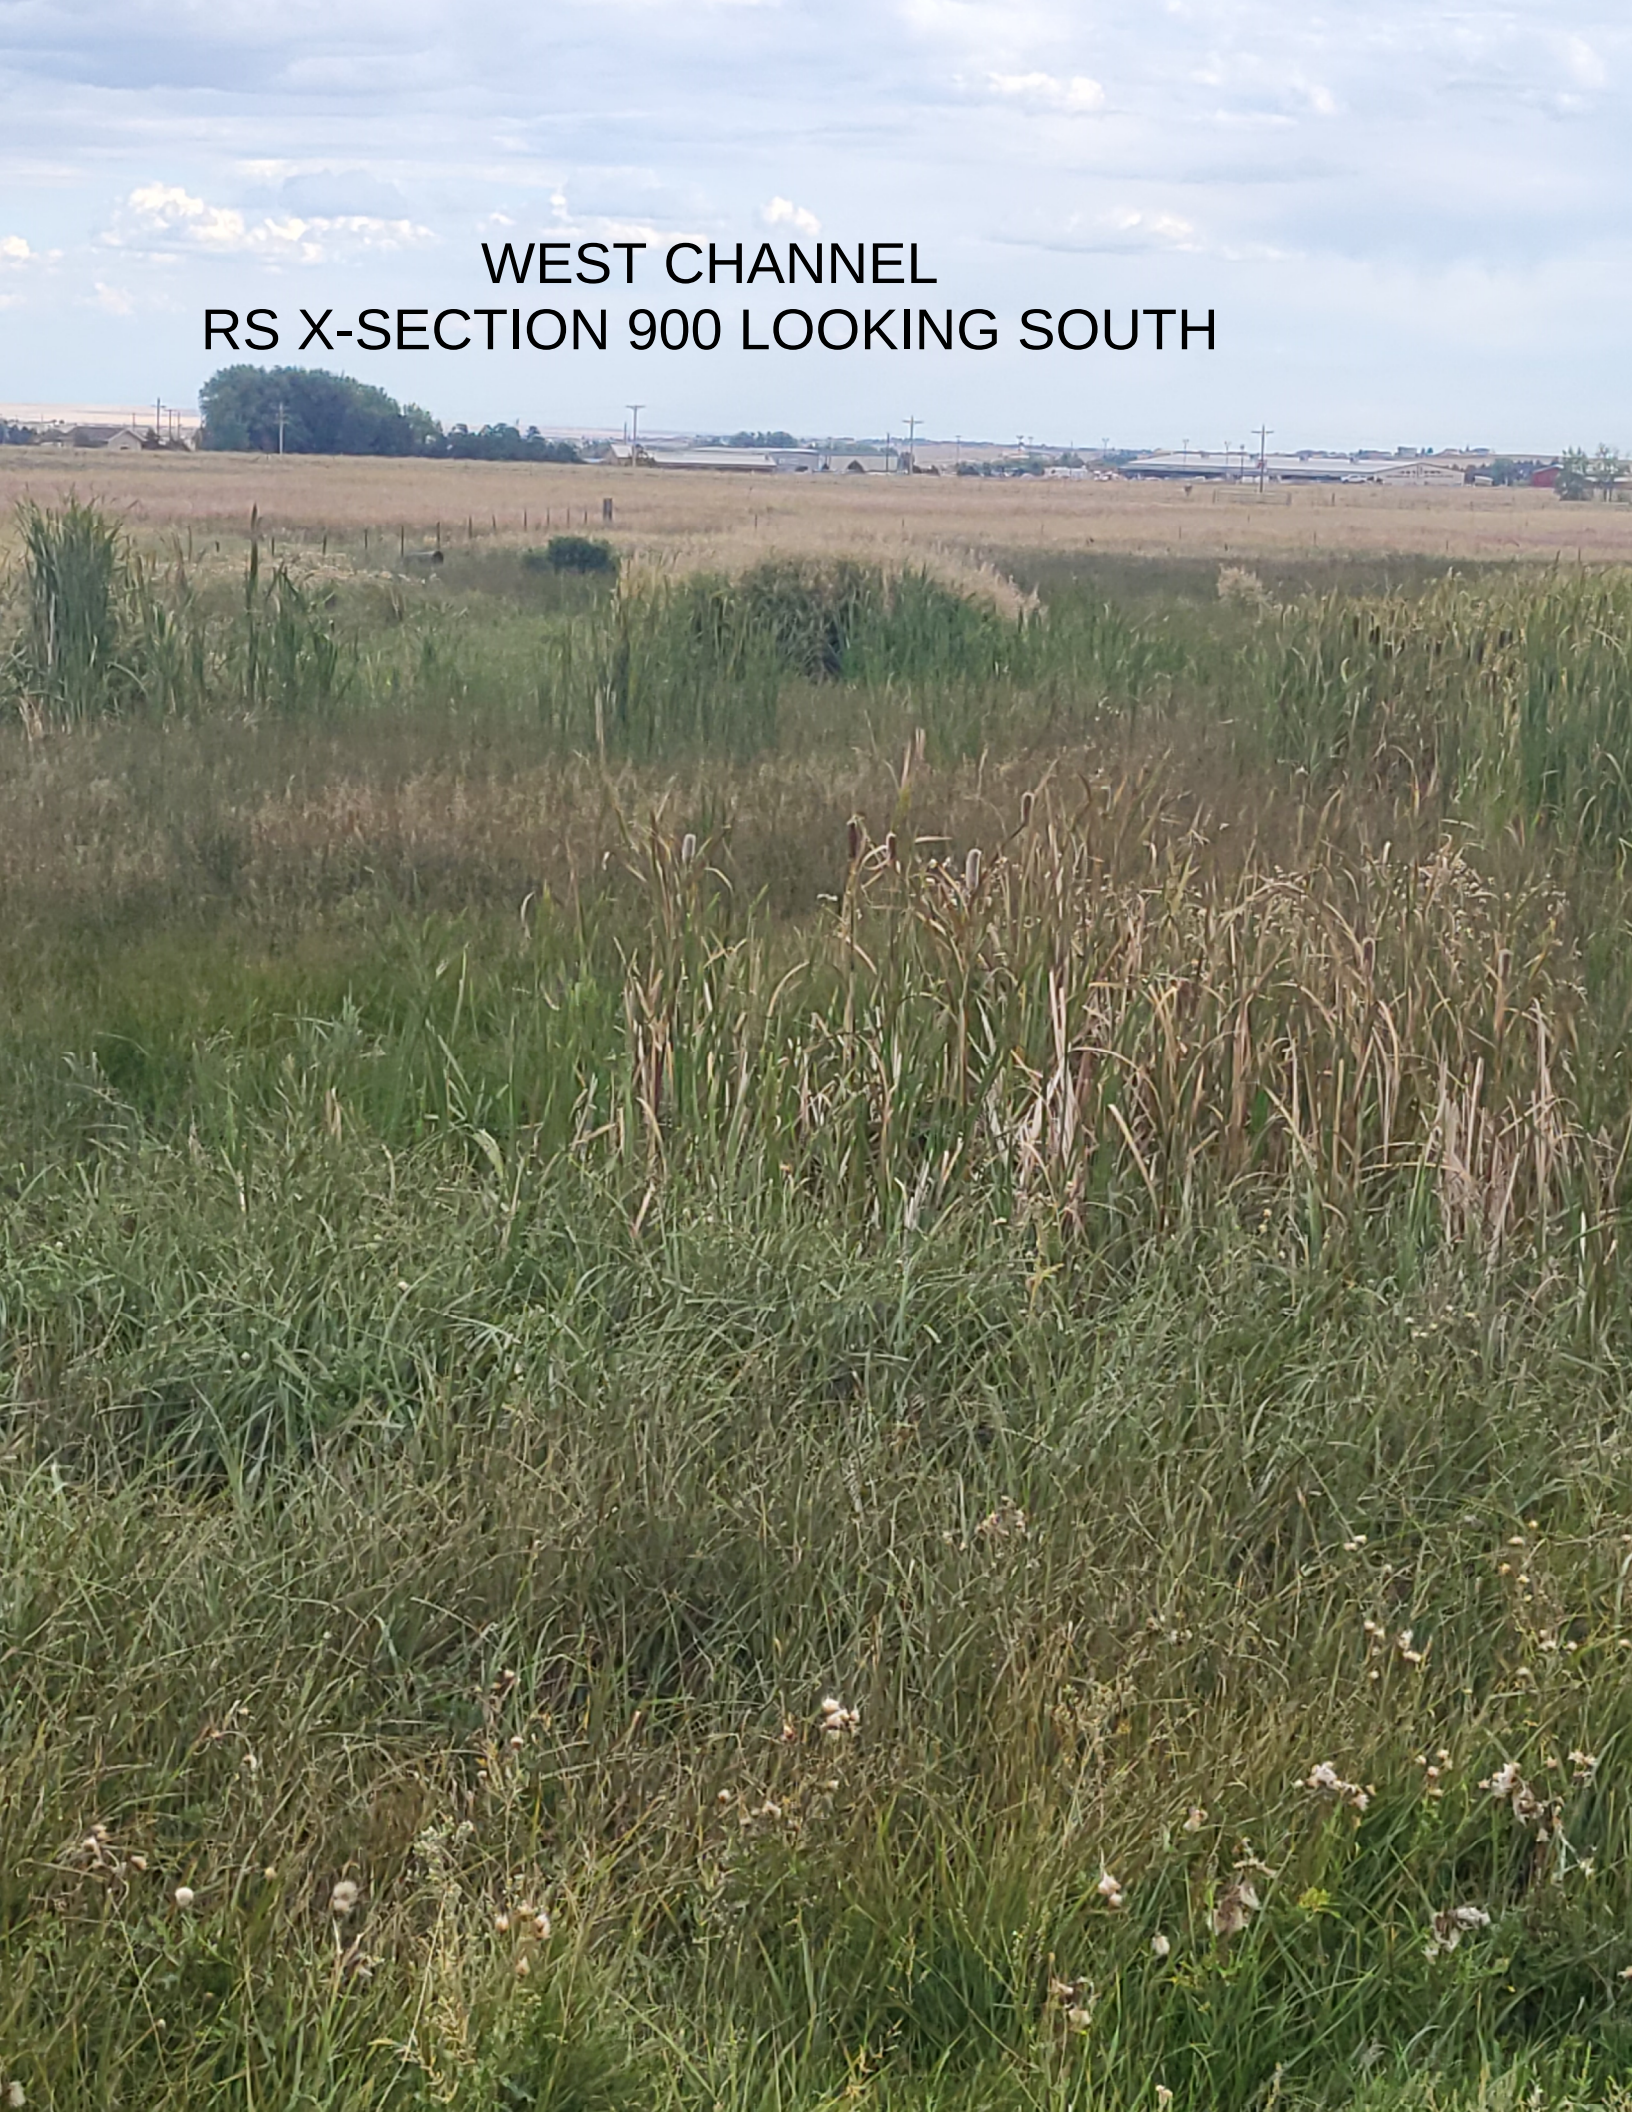
WEST CHANNEL
RS X-SECTION 900 LOOKING SOUTH

WEST CHANNEL
RS X-SECTION 900 LOOKING EAST

WEST CHANNEL
RS X-SECTION 1500 LOOKING NORTH

WEST CHANNEL EXISTING CONDITIONS

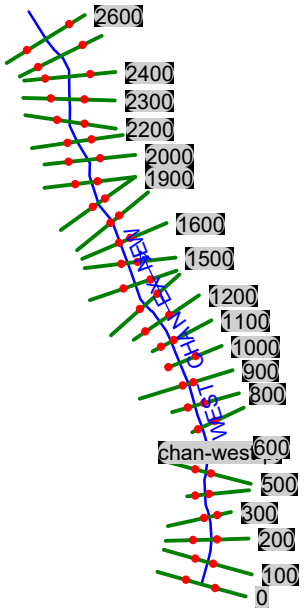

HEC-RAS Plan: Plan 02 River: WEST CHAN EX NEW Reach: chan-west-pr Profile: PF 1

Reach	River Sta	Profile	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
			(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft/s)	(sq ft)	(ft)	
chan-west-pr	2600	PF 1	219.00	6966.83	6967.79	6967.63	6967.90	0.017799	2.60	84.18	158.35	0.63
chan-west-pr	2500	PF 1	219.00	6964.90	6965.71		6965.85	0.023298	3.05	71.69	129.71	0.72
chan-west-pr	2400	PF 1	219.00	6963.25	6964.24		6964.32	0.010700	2.29	95.59	148.56	0.50
chan-west-pr	2300	PF 1	219.00	6961.27	6962.31	6962.27	6962.50	0.037650	3.51	62.47	131.69	0.90
chan-west-pr	2200	PF 1	219.00	6958.46	6959.77		6959.91	0.018663	2.93	74.69	122.50	0.66
chan-west-pr	2100	PF 1	219.00	6955.98	6957.46		6957.72	0.025643	4.03	54.39	69.81	0.80
chan-west-pr	2000	PF 1	219.00	6954.57	6956.18		6956.28	0.008732	2.59	84.54	93.75	0.48
chan-west-pr	1900	PF 1	219.00	6952.76	6954.43	6954.40	6954.68	0.037613	4.02	54.59	95.18	0.93
chan-west-pr	1800	PF 1	219.00	6949.31	6951.77	6951.52	6952.02	0.019694	4.05	54.04	55.99	0.73
chan-west-pr	1700	PF 1	219.00	6947.11	6949.36		6949.76	0.025882	5.06	43.31	39.34	0.85
chan-west-pr	1600	PF 1	219.00	6945.84	6948.18		6948.34	0.008240	3.19	69.18	60.82	0.49
chan-west-pr	1500	PF 1	219.00	6944.91	6946.88		6947.04	0.023605	3.14	70.67	83.82	0.57
chan-west-pr	1400	PF 1	219.00	6943.78	6945.45		6945.51	0.010305	2.00	109.73	123.80	0.37
chan-west-pr	1300	PF 1	219.00	6942.19	6943.64		6943.80	0.033144	3.22	68.07	89.53	0.65
chan-west-pr	1200	PF 1	219.00	6940.78	6943.03		6943.06	0.002970	1.34	169.08	153.77	0.21
chan-west-pr	1100	PF 1	219.00	6940.72	6942.48	6942.14	6942.55	0.010638	2.35	113.09	166.20	0.39
chan-west-pr	1000	PF 1	219.00	6939.66	6940.98		6941.09	0.020399	2.69	81.46	97.46	0.52
chan-west-pr	900	PF 1	219.00	6937.05	6938.39	6938.33	6938.52	0.033426	3.38	90.46	227.78	0.66
chan-west-pr	800	PF 1	219.00	6934.82	6936.10		6936.19	0.016993	2.64	99.24	178.51	0.48
chan-west-pr	700	PF 1	219.00	6932.96	6934.12		6934.23	0.022819	2.81	87.83	153.26	0.55
chan-west-pr	600	PF 1	219.00	6930.96	6932.22		6932.30	0.015704	2.46	116.29	250.13	0.46
chan-west-pr	500	PF 1	219.00	6928.39	6929.71	6929.55	6929.93	0.039549	3.71	60.15	82.77	0.72
chan-west-pr	400	PF 1	219.00	6924.96	6927.52		6927.65	0.014470	2.91	78.16	77.13	0.46
chan-west-pr	300	PF 1	219.00	6923.02	6924.34	6924.34	6924.79	0.075333	5.37	40.78	45.95	1.01
chan-west-pr	200	PF 1	219.00	6919.08	6920.46		6920.57	0.016608	2.65	82.52	86.27	0.48
chan-west-pr	100	PF 1	219.00	6917.36	6920.09		6920.12	0.001886	1.42	154.70	85.42	0.18
chan-west-pr	0	PF 1	219.00	6918.00	6919.64	6919.12	6919.72	0.012995	2.23	98.31	111.26	0.42

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2600 Profile: PF 1

E.G. Elev (ft)	6967.90	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.		0.050	
W.S. Elev (ft)	6967.79	Reach Len. (ft)	108.00	100.00	88.00
Crit W.S. (ft)	6967.63	Flow Area (sq ft)		84.18	
E.G. Slope (ft/ft)	0.017799	Area (sq ft)		84.18	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	158.35	Top Width (ft)		158.35	
Vel Total (ft/s)	2.60	Avg. Vel. (ft/s)		2.60	
Max Chl Dpth (ft)	0.96	Hydr. Depth (ft)		0.53	
Conv. Total (cfs)	1641.5	Conv. (cfs)		1641.5	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		158.37	
Min Ch El (ft)	6966.83	Shear (lb/sq ft)		0.59	
Alpha	1.00	Stream Power (lb/ft s)		1.54	
Frctn Loss (ft)	2.03	Cum Volume (acre-ft)	0.26	4.50	0.25
C & E Loss (ft)	0.00	Cum SA (acres)	0.81	5.20	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2500 Profile: PF 1

E.G. Elev (ft)	6965.85	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.15	Wt. n-Val.		0.050	
W.S. Elev (ft)	6965.71	Reach Len. (ft)	132.00	100.00	59.00
Crit W.S. (ft)		Flow Area (sq ft)		71.69	
E.G. Slope (ft/ft)	0.023298	Area (sq ft)		71.69	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	129.71	Top Width (ft)		129.71	
Vel Total (ft/s)	3.05	Avg. Vel. (ft/s)		3.05	
Max Chl Dpth (ft)	0.81	Hydr. Depth (ft)		0.55	
Conv. Total (cfs)	1434.8	Conv. (cfs)		1434.8	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		129.73	
Min Ch El (ft)	6964.90	Shear (lb/sq ft)		0.80	
Alpha	1.00	Stream Power (lb/ft s)		2.46	
Frctn Loss (ft)	1.52	Cum Volume (acre-ft)	0.26	4.32	0.25
C & E Loss (ft)	0.02	Cum SA (acres)	0.81	4.87	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2400 Profile: PF 1

E.G. Elev (ft)	6964.32	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.050	
W.S. Elev (ft)	6964.24	Reach Len. (ft)	113.00	100.00	91.00
Crit W.S. (ft)		Flow Area (sq ft)		95.59	
E.G. Slope (ft/ft)	0.010700	Area (sq ft)		95.59	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	148.56	Top Width (ft)		148.56	
Vel Total (ft/s)	2.29	Avg. Vel. (ft/s)		2.29	
Max Chl Dpth (ft)	0.99	Hydr. Depth (ft)		0.64	
Conv. Total (cfs)	2117.2	Conv. (cfs)		2117.2	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		148.59	
Min Ch El (ft)	6963.25	Shear (lb/sq ft)		0.43	
Alpha	1.00	Stream Power (lb/ft s)		0.98	
Frctn Loss (ft)	1.82	Cum Volume (acre-ft)	0.26	4.13	0.25
C & E Loss (ft)	0.01	Cum SA (acres)	0.81	4.55	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2300 Profile: PF 1

E.G. Elev (ft)	6962.50	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.19	Wt. n-Val.		0.050	
W.S. Elev (ft)	6962.31	Reach Len. (ft)	107.00	100.00	97.00
Crit W.S. (ft)	6962.27	Flow Area (sq ft)		62.47	
E.G. Slope (ft/ft)	0.037650	Area (sq ft)		62.47	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	131.69	Top Width (ft)		131.69	
Vel Total (ft/s)	3.51	Avg. Vel. (ft/s)		3.51	
Max Chl Dpth (ft)	1.03	Hydr. Depth (ft)		0.47	
Conv. Total (cfs)	1128.7	Conv. (cfs)		1128.7	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		131.78	
Min Ch El (ft)	6961.27	Shear (lb/sq ft)		1.11	
Alpha	1.00	Stream Power (lb/ft s)		3.91	
Frctn Loss (ft)	2.57	Cum Volume (acre-ft)	0.26	3.95	0.25
C & E Loss (ft)	0.02	Cum SA (acres)	0.81	4.23	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2200 Profile: PF 1

E.G. Elev (ft)	6959.91	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.13	Wt. n-Val.	0.050	0.050	
W.S. Elev (ft)	6959.77	Reach Len. (ft)	74.00	100.00	110.00
Crit W.S. (ft)		Flow Area (sq ft)	0.01	74.68	
E.G. Slope (ft/ft)	0.018663	Area (sq ft)	0.01	74.68	
Q Total (cfs)	219.00	Flow (cfs)	0.00	219.00	
Top Width (ft)	122.50	Top Width (ft)	0.97	121.54	
Vel Total (ft/s)	2.93	Avg. Vel. (ft/s)	0.18	2.93	
Max Chl Dpth (ft)	1.31	Hydr. Depth (ft)	0.01	0.61	
Conv. Total (cfs)	1603.1	Conv. (cfs)	0.0	1603.1	
Length Wtd. (ft)	100.00	Wetted Per. (ft)	0.97	121.66	
Min Ch El (ft)	6958.46	Shear (lb/sq ft)	0.01	0.72	
Alpha	1.00	Stream Power (lb/ft s)	0.00	2.10	
Frctn Loss (ft)	2.17	Cum Volume (acre-ft)	0.26	3.79	0.25
C & E Loss (ft)	0.01	Cum SA (acres)	0.81	3.94	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2100 Profile: PF 1

E.G. Elev (ft)	6957.72	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.25	Wt. n-Val.		0.050	
W.S. Elev (ft)	6957.46	Reach Len. (ft)	92.00	100.00	83.00
Crit W.S. (ft)		Flow Area (sq ft)		54.39	
E.G. Slope (ft/ft)	0.025643	Area (sq ft)		54.39	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	69.81	Top Width (ft)		69.81	
Vel Total (ft/s)	4.03	Avg. Vel. (ft/s)		4.03	
Max Chl Dpth (ft)	1.48	Hydr. Depth (ft)		0.78	
Conv. Total (cfs)	1367.6	Conv. (cfs)		1367.6	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		69.88	
Min Ch El (ft)	6955.98	Shear (lb/sq ft)		1.25	
Alpha	1.00	Stream Power (lb/ft s)		5.02	
Frctn Loss (ft)	1.39	Cum Volume (acre-ft)	0.26	3.65	0.25
C & E Loss (ft)	0.04	Cum SA (acres)	0.81	3.72	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 2000 Profile: PF 1

E.G. Elev (ft)	6956.28	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.10	Wt. n-Val.		0.050	
W.S. Elev (ft)	6956.18	Reach Len. (ft)	101.00	100.00	102.00
Crit W.S. (ft)		Flow Area (sq ft)		84.54	
E.G. Slope (ft/ft)	0.008732	Area (sq ft)		84.54	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	93.75	Top Width (ft)		93.75	
Vel Total (ft/s)	2.59	Avg. Vel. (ft/s)		2.59	
Max Chl Dpth (ft)	1.61	Hydr. Depth (ft)		0.90	
Conv. Total (cfs)	2343.6	Conv. (cfs)		2343.6	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		93.82	
Min Ch El (ft)	6954.57	Shear (lb/sq ft)		0.49	
Alpha	1.00	Stream Power (lb/ft s)		1.27	
Frctn Loss (ft)	1.59	Cum Volume (acre-ft)	0.26	3.49	0.25
C & E Loss (ft)	0.01	Cum SA (acres)	0.81	3.53	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1900 Profile: PF 1

E.G. Elev (ft)	6954.68	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.25	Wt. n-Val.		0.050	0.050
W.S. Elev (ft)	6954.43	Reach Len. (ft)	81.00	100.00	134.00
Crit W.S. (ft)	6954.40	Flow Area (sq ft)		54.50	0.09
E.G. Slope (ft/ft)	0.037613	Area (sq ft)		54.50	0.09
Q Total (cfs)	219.00	Flow (cfs)		218.92	0.08
Top Width (ft)	95.18	Top Width (ft)		93.52	1.66
Vel Total (ft/s)	4.01	Avg. Vel. (ft/s)		4.02	0.84
Max Chl Dpth (ft)	1.67	Hydr. Depth (ft)		0.58	0.06
Conv. Total (cfs)	1129.2	Conv. (cfs)		1128.8	0.4
Length Wtd. (ft)	100.01	Wetted Per. (ft)		93.67	1.66
Min Ch El (ft)	6952.76	Shear (lb/sq ft)		1.37	0.13
Alpha	1.00	Stream Power (lb/ft s)		5.49	0.11
Frctn Loss (ft)	2.65	Cum Volume (acre-ft)	0.26	3.33	0.25
C & E Loss (ft)	0.00	Cum SA (acres)	0.81	3.31	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1800 Profile: PF 1

E.G. Elev (ft)	6952.02	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.26	Wt. n-Val.		0.050	
W.S. Elev (ft)	6951.77	Reach Len. (ft)	97.00	100.00	124.00
Crit W.S. (ft)	6951.52	Flow Area (sq ft)		54.04	
E.G. Slope (ft/ft)	0.019694	Area (sq ft)		54.04	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	55.99	Top Width (ft)		55.99	
Vel Total (ft/s)	4.05	Avg. Vel. (ft/s)		4.05	
Max Chl Dpth (ft)	2.46	Hydr. Depth (ft)		0.97	
Conv. Total (cfs)	1560.6	Conv. (cfs)		1560.6	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		56.41	
Min Ch El (ft)	6949.31	Shear (lb/sq ft)		1.18	
Alpha	1.00	Stream Power (lb/ft s)		4.77	
Frctn Loss (ft)	2.25	Cum Volume (acre-ft)	0.26	3.20	0.25
C & E Loss (ft)	0.01	Cum SA (acres)	0.81	3.14	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1700 Profile: PF 1

E.G. Elev (ft)	6949.76	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.40	Wt. n-Val.		0.050	
W.S. Elev (ft)	6949.36	Reach Len. (ft)	110.00	100.00	96.00
Crit W.S. (ft)		Flow Area (sq ft)		43.31	
E.G. Slope (ft/ft)	0.025882	Area (sq ft)		43.31	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	39.34	Top Width (ft)		39.34	
Vel Total (ft/s)	5.06	Avg. Vel. (ft/s)		5.06	
Max Chl Dpth (ft)	2.25	Hydr. Depth (ft)		1.10	
Conv. Total (cfs)	1361.3	Conv. (cfs)		1361.3	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		39.83	
Min Ch El (ft)	6947.11	Shear (lb/sq ft)		1.76	
Alpha	1.00	Stream Power (lb/ft s)		8.88	
Frctn Loss (ft)	1.35	Cum Volume (acre-ft)	0.26	3.09	0.25
C & E Loss (ft)	0.07	Cum SA (acres)	0.81	3.03	0.91

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1600 Profile: PF 1

E.G. Elev (ft)	6948.34	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.16	Wt. n-Val.	0.050	0.050	0.050
W.S. Elev (ft)	6948.18	Reach Len. (ft)	109.00	100.00	92.00
Crit W.S. (ft)		Flow Area (sq ft)	0.09	68.50	0.60
E.G. Slope (ft/ft)	0.008240	Area (sq ft)	0.09	68.50	0.60
Q Total (cfs)	219.00	Flow (cfs)	0.04	218.63	0.34
Top Width (ft)	60.82	Top Width (ft)	1.51	53.00	6.31
Vel Total (ft/s)	3.17	Avg. Vel. (ft/s)	0.40	3.19	0.56
Max Chl Dpth (ft)	2.34	Hydr. Depth (ft)	0.06	1.29	0.09
Conv. Total (cfs)	2412.6	Conv. (cfs)	0.4	2408.5	3.7
Length Wtd. (ft)	99.99	Wetted Per. (ft)	1.51	53.22	6.32
Min Ch El (ft)	6945.84	Shear (lb/sq ft)	0.03	0.66	0.05
Alpha	1.02	Stream Power (lb/ft s)	0.01	2.11	0.03
Frctn Loss (ft)	1.30	Cum Volume (acre-ft)	0.26	2.96	0.25
C & E Loss (ft)	0.00	Cum SA (acres)	0.80	2.93	0.90

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1500 Profile: PF 1

E.G. Elev (ft)	6947.04	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.15	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6946.88	Reach Len. (ft)	95.00	100.00	109.00
Crit W.S. (ft)		Flow Area (sq ft)	0.58	69.26	0.84
E.G. Slope (ft/ft)	0.023605	Area (sq ft)	0.58	69.26	0.84
Q Total (cfs)	219.00	Flow (cfs)	0.48	217.81	0.71
Top Width (ft)	83.82	Top Width (ft)	4.58	73.00	6.24
Vel Total (ft/s)	3.10	Avg. Vel. (ft/s)	0.82	3.14	0.85
Max Chl Dpth (ft)	1.97	Hydr. Depth (ft)	0.13	0.95	0.13
Conv. Total (cfs)	1425.4	Conv. (cfs)	3.1	1417.7	4.6
Length Wtd. (ft)	100.01	Wetted Per. (ft)	4.58	73.14	6.25
Min Ch El (ft)	6944.91	Shear (lb/sq ft)	0.19	1.40	0.20
Alpha	1.02	Stream Power (lb/ft s)	0.15	4.39	0.17
Frctn Loss (ft)	1.49	Cum Volume (acre-ft)	0.26	2.80	0.25
C & E Loss (ft)	0.03	Cum SA (acres)	0.80	2.78	0.89

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1400 Profile: PF 1

E.G. Elev (ft)	6945.51	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.06	Wt. n-Val.	0.000	0.070	0.000
W.S. Elev (ft)	6945.45	Reach Len. (ft)	69.00	100.00	114.80
Crit W.S. (ft)		Flow Area (sq ft)	0.00	109.72	0.00
E.G. Slope (ft/ft)	0.010305	Area (sq ft)	0.00	109.72	0.00
Q Total (cfs)	219.00	Flow (cfs)	0.00	219.00	0.00
Top Width (ft)	123.80	Top Width (ft)	0.47	123.00	0.33
Vel Total (ft/s)	2.00	Avg. Vel. (ft/s)	0.07	2.00	0.11
Max Chl Dpth (ft)	1.67	Hydr. Depth (ft)	0.01	0.89	0.01
Conv. Total (cfs)	2157.3	Conv. (cfs)	0.0	2157.3	0.0
Length Wtd. (ft)	100.00	Wetted Per. (ft)	0.47	123.09	0.33
Min Ch El (ft)	6943.78	Shear (lb/sq ft)		0.57	
Alpha	1.00	Stream Power (lb/ft s)		1.14	
Frctn Loss (ft)	1.70	Cum Volume (acre-ft)	0.26	2.60	0.25
C & E Loss (ft)	0.01	Cum SA (acres)	0.79	2.56	0.88

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1300 Profile: PF 1

E.G. Elev (ft)	6943.80	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.16	Wt. n-Val.		0.070	
W.S. Elev (ft)	6943.64	Reach Len. (ft)	108.00	100.00	101.00
Crit W.S. (ft)		Flow Area (sq ft)		68.07	
E.G. Slope (ft/ft)	0.033144	Area (sq ft)		68.07	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	89.53	Top Width (ft)		89.53	
Vel Total (ft/s)	3.22	Avg. Vel. (ft/s)		3.22	
Max Chl Dpth (ft)	1.45	Hydr. Depth (ft)		0.76	
Conv. Total (cfs)	1202.9	Conv. (cfs)		1202.9	
Length Wtd. (ft)	100.05	Wetted Per. (ft)		89.60	
Min Ch El (ft)	6942.19	Shear (lb/sq ft)		1.57	
Alpha	1.00	Stream Power (lb/ft s)		5.06	
Frctn Loss (ft)	0.70	Cum Volume (acre-ft)	0.26	2.39	0.25
C & E Loss (ft)	0.04	Cum SA (acres)	0.79	2.31	0.88

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1200 Profile: PF 1

E.G. Elev (ft)	6943.06	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.03	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6943.03	Reach Len. (ft)	110.00	100.00	95.00
Crit W.S. (ft)		Flow Area (sq ft)	4.34	158.54	6.20
E.G. Slope (ft/ft)	0.002970	Area (sq ft)	4.34	158.54	6.20
Q Total (cfs)	219.00	Flow (cfs)	2.49	212.42	4.09
Top Width (ft)	153.77	Top Width (ft)	12.42	127.00	14.36
Vel Total (ft/s)	1.30	Avg. Vel. (ft/s)	0.57	1.34	0.66
Max Chl Dpth (ft)	2.25	Hydr. Depth (ft)	0.35	1.25	0.43
Conv. Total (cfs)	4018.7	Conv. (cfs)	45.7	3897.9	75.1
Length Wtd. (ft)	100.87	Wetted Per. (ft)	12.44	127.18	14.38
Min Ch El (ft)	6940.78	Shear (lb/sq ft)	0.06	0.23	0.08
Alpha	1.04	Stream Power (lb/ft s)	0.04	0.31	0.05
Frctn Loss (ft)	0.51	Cum Volume (acre-ft)	0.26	2.13	0.24
C & E Loss (ft)	0.00	Cum SA (acres)	0.78	2.07	0.86

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1100 Profile: PF 1

E.G. Elev (ft)	6942.55	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6942.48	Reach Len. (ft)	119.00	100.00	95.00
Crit W.S. (ft)	6942.14	Flow Area (sq ft)	32.13	71.23	9.73
E.G. Slope (ft/ft)	0.010638	Area (sq ft)	32.13	71.23	9.73
Q Total (cfs)	219.00	Flow (cfs)	42.23	167.36	9.42
Top Width (ft)	166.20	Top Width (ft)	69.09	64.00	33.11
Vel Total (ft/s)	1.94	Avg. Vel. (ft/s)	1.31	2.35	0.97
Max Chl Dpth (ft)	1.76	Hydr. Depth (ft)	0.47	1.11	0.29
Conv. Total (cfs)	2123.3	Conv. (cfs)	409.4	1622.6	91.3
Length Wtd. (ft)	101.72	Wetted Per. (ft)	69.11	64.07	33.12
Min Ch El (ft)	6940.72	Shear (lb/sq ft)	0.31	0.74	0.20
Alpha	1.22	Stream Power (lb/ft s)	0.41	1.73	0.19
Frctn Loss (ft)	1.46	Cum Volume (acre-ft)	0.21	1.87	0.23
C & E Loss (ft)	0.00	Cum SA (acres)	0.67	1.85	0.81

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 1000 Profile: PF 1

E.G. Elev (ft)	6941.09	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.		0.070	
W.S. Elev (ft)	6940.98	Reach Len. (ft)	114.00	100.00	102.00
Crit W.S. (ft)		Flow Area (sq ft)		81.46	
E.G. Slope (ft/ft)	0.020399	Area (sq ft)		81.46	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	97.46	Top Width (ft)		97.46	
Vel Total (ft/s)	2.69	Avg. Vel. (ft/s)		2.69	
Max Chl Dpth (ft)	1.32	Hydr. Depth (ft)		0.84	
Conv. Total (cfs)	1533.4	Conv. (cfs)		1533.4	
Length Wtd. (ft)	100.50	Wetted Per. (ft)		97.56	
Min Ch El (ft)	6939.66	Shear (lb/sq ft)		1.06	
Alpha	1.00	Stream Power (lb/ft s)		2.86	
Frctn Loss (ft)	2.58	Cum Volume (acre-ft)	0.17	1.69	0.22
C & E Loss (ft)	0.00	Cum SA (acres)	0.58	1.66	0.77

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 900 Profile: PF 1

E.G. Elev (ft)	6938.52	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.12	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6938.39	Reach Len. (ft)	102.00	100.00	99.00
Crit W.S. (ft)	6938.33	Flow Area (sq ft)	2.90	39.12	48.44
E.G. Slope (ft/ft)	0.033426	Area (sq ft)	2.90	39.12	48.44
Q Total (cfs)	219.00	Flow (cfs)	3.82	132.15	83.03
Top Width (ft)	227.78	Top Width (ft)	14.69	48.00	165.09
Vel Total (ft/s)	2.42	Avg. Vel. (ft/s)	1.32	3.38	1.71
Max Chl Dpth (ft)	1.34	Hydr. Depth (ft)	0.20	0.81	0.29
Conv. Total (cfs)	1197.9	Conv. (cfs)	20.9	722.8	454.1
Length Wtd. (ft)	99.86	Wetted Per. (ft)	14.69	48.17	165.12
Min Ch El (ft)	6937.05	Shear (lb/sq ft)	0.41	1.69	0.61
Alpha	1.37	Stream Power (lb/ft s)	0.54	5.73	1.05
Frctn Loss (ft)	2.31	Cum Volume (acre-ft)	0.16	1.56	0.16
C & E Loss (ft)	0.01	Cum SA (acres)	0.56	1.49	0.58

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 800 Profile: PF 1

E.G. Elev (ft)	6936.19	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.09	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6936.10	Reach Len. (ft)	92.00	100.00	105.00
Crit W.S. (ft)		Flow Area (sq ft)	11.81	68.88	18.56
E.G. Slope (ft/ft)	0.016993	Area (sq ft)	11.81	68.88	18.56
Q Total (cfs)	219.00	Flow (cfs)	16.41	181.67	20.92
Top Width (ft)	178.51	Top Width (ft)	33.19	74.00	71.33
Vel Total (ft/s)	2.21	Avg. Vel. (ft/s)	1.39	2.64	1.13
Max Chl Dpth (ft)	1.28	Hydr. Depth (ft)	0.36	0.93	0.26
Conv. Total (cfs)	1680.0	Conv. (cfs)	125.9	1393.6	160.4
Length Wtd. (ft)	99.70	Wetted Per. (ft)	33.19	74.01	71.37
Min Ch El (ft)	6934.82	Shear (lb/sq ft)	0.38	0.99	0.28
Alpha	1.24	Stream Power (lb/ft s)	0.52	2.60	0.31
Frctn Loss (ft)	1.95	Cum Volume (acre-ft)	0.15	1.43	0.08
C & E Loss (ft)	0.00	Cum SA (acres)	0.50	1.35	0.31

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 700 Profile: PF 1

E.G. Elev (ft)	6934.23	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6934.12	Reach Len. (ft)	123.00	100.00	93.00
Crit W.S. (ft)		Flow Area (sq ft)	11.63	67.24	8.96
E.G. Slope (ft/ft)	0.022819	Area (sq ft)	11.63	67.24	8.96
Q Total (cfs)	219.00	Flow (cfs)	19.68	188.88	10.44
Top Width (ft)	153.26	Top Width (ft)	30.33	82.00	40.93
Vel Total (ft/s)	2.49	Avg. Vel. (ft/s)	1.69	2.81	1.16
Max Chl Dpth (ft)	1.16	Hydr. Depth (ft)	0.38	0.82	0.22
Conv. Total (cfs)	1449.8	Conv. (cfs)	130.3	1250.4	69.1
Length Wtd. (ft)	102.46	Wetted Per. (ft)	30.34	82.01	40.96
Min Ch El (ft)	6932.96	Shear (lb/sq ft)	0.55	1.17	0.31
Alpha	1.15	Stream Power (lb/ft s)	0.92	3.28	0.36
Frctn Loss (ft)	1.92	Cum Volume (acre-ft)	0.12	1.28	0.05
C & E Loss (ft)	0.01	Cum SA (acres)	0.44	1.17	0.18

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 600 Profile: PF 1

E.G. Elev (ft)	6932.30	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6932.22	Reach Len. (ft)	106.00	100.00	82.00
Crit W.S. (ft)		Flow Area (sq ft)	33.96	63.31	19.02
E.G. Slope (ft/ft)	0.015704	Area (sq ft)	33.96	63.31	19.02
Q Total (cfs)	219.00	Flow (cfs)	37.99	155.98	25.03
Top Width (ft)	250.13	Top Width (ft)	124.46	71.00	54.67
Vel Total (ft/s)	1.88	Avg. Vel. (ft/s)	1.12	2.46	1.32
Max Chl Dpth (ft)	1.26	Hydr. Depth (ft)	0.27	0.89	0.35
Conv. Total (cfs)	1747.6	Conv. (cfs)	303.2	1244.7	199.7
Length Wtd. (ft)	99.48	Wetted Per. (ft)	124.50	71.02	54.70
Min Ch El (ft)	6930.96	Shear (lb/sq ft)	0.27	0.87	0.34
Alpha	1.34	Stream Power (lb/ft s)	0.30	2.15	0.45
Frctn Loss (ft)	2.35	Cum Volume (acre-ft)	0.06	1.13	0.02
C & E Loss (ft)	0.01	Cum SA (acres)	0.22	1.00	0.08

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 500 Profile: PF 1

E.G. Elev (ft)	6929.93	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.21	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6929.71	Reach Len. (ft)	91.00	100.00	115.00
Crit W.S. (ft)	6929.55	Flow Area (sq ft)	0.99	58.54	0.63
E.G. Slope (ft/ft)	0.039549	Area (sq ft)	0.99	58.54	0.63
Q Total (cfs)	219.00	Flow (cfs)	1.18	217.18	0.64
Top Width (ft)	82.77	Top Width (ft)	6.49	71.00	5.28
Vel Total (ft/s)	3.64	Avg. Vel. (ft/s)	1.20	3.71	1.02
Max Chl Dpth (ft)	1.32	Hydr. Depth (ft)	0.15	0.82	0.12
Conv. Total (cfs)	1101.2	Conv. (cfs)	5.9	1092.1	3.2
Length Wtd. (ft)	99.90	Wetted Per. (ft)	6.50	71.04	5.28
Min Ch El (ft)	6928.39	Shear (lb/sq ft)	0.37	2.03	0.29
Alpha	1.03	Stream Power (lb/ft s)	0.45	7.55	0.30
Frctn Loss (ft)	2.24	Cum Volume (acre-ft)	0.01	0.99	0.00
C & E Loss (ft)	0.03	Cum SA (acres)	0.06	0.84	0.02

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 400 Profile: PF 1

E.G. Elev (ft)	6927.65	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.13	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6927.52	Reach Len. (ft)	172.00	100.00	180.00
Crit W.S. (ft)		Flow Area (sq ft)	4.46	73.61	0.09
E.G. Slope (ft/ft)	0.014470	Area (sq ft)	4.46	73.61	0.09
Q Total (cfs)	219.00	Flow (cfs)	4.98	213.99	0.03
Top Width (ft)	77.13	Top Width (ft)	15.45	60.00	1.68
Vel Total (ft/s)	2.80	Avg. Vel. (ft/s)	1.12	2.91	0.37
Max Chl Dpth (ft)	2.56	Hydr. Depth (ft)	0.29	1.23	0.05
Conv. Total (cfs)	1820.6	Conv. (cfs)	41.4	1778.9	0.3
Length Wtd. (ft)	100.82	Wetted Per. (ft)	15.46	60.60	1.68
Min Ch El (ft)	6924.96	Shear (lb/sq ft)	0.26	1.10	0.05
Alpha	1.06	Stream Power (lb/ft s)	0.29	3.19	0.02
Frctn Loss (ft)	2.82	Cum Volume (acre-ft)	0.01	0.83	0.00
C & E Loss (ft)	0.03	Cum SA (acres)	0.03	0.69	0.01

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 300 Profile: PF 1

E.G. Elev (ft)	6924.79	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.45	Wt. n-Val.		0.070	
W.S. Elev (ft)	6924.34	Reach Len. (ft)	106.00	100.00	108.00
Crit W.S. (ft)	6924.34	Flow Area (sq ft)		40.78	
E.G. Slope (ft/ft)	0.075333	Area (sq ft)		40.78	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	45.95	Top Width (ft)		45.95	
Vel Total (ft/s)	5.37	Avg. Vel. (ft/s)		5.37	
Max Chl Dpth (ft)	1.32	Hydr. Depth (ft)		0.89	
Conv. Total (cfs)	797.9	Conv. (cfs)		797.9	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		46.07	
Min Ch El (ft)	6923.02	Shear (lb/sq ft)		4.16	
Alpha	1.00	Stream Power (lb/ft s)		22.35	
Frctn Loss (ft)	3.08	Cum Volume (acre-ft)	0.00	0.70	0.00
C & E Loss (ft)	0.10	Cum SA (acres)	0.00	0.56	0.01

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 200 Profile: PF 1

E.G. Elev (ft)	6920.57	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.		0.070	
W.S. Elev (ft)	6920.46	Reach Len. (ft)	81.00	100.00	107.00
Crit W.S. (ft)		Flow Area (sq ft)		82.52	
E.G. Slope (ft/ft)	0.016608	Area (sq ft)		82.52	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	86.27	Top Width (ft)		86.27	
Vel Total (ft/s)	2.65	Avg. Vel. (ft/s)		2.65	
Max Chl Dpth (ft)	1.38	Hydr. Depth (ft)		0.96	
Conv. Total (cfs)	1699.4	Conv. (cfs)		1699.4	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		86.37	
Min Ch El (ft)	6919.08	Shear (lb/sq ft)		0.99	
Alpha	1.00	Stream Power (lb/ft s)		2.63	
Frctn Loss (ft)	0.42	Cum Volume (acre-ft)	0.00	0.56	0.00
C & E Loss (ft)	0.02	Cum SA (acres)	0.00	0.41	0.01

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 100 Profile: PF 1

E.G. Elev (ft)	6920.12	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.03	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6920.09	Reach Len. (ft)	101.00	100.00	107.00
Crit W.S. (ft)		Flow Area (sq ft)	0.15	154.43	0.11
E.G. Slope (ft/ft)	0.001886	Area (sq ft)	0.15	154.43	0.11
Q Total (cfs)	219.00	Flow (cfs)	0.02	218.96	0.01
Top Width (ft)	85.42	Top Width (ft)	2.15	80.70	2.56
Vel Total (ft/s)	1.42	Avg. Vel. (ft/s)	0.16	1.42	0.11
Max Chl Dpth (ft)	2.73	Hydr. Depth (ft)	0.07	1.91	0.04
Conv. Total (cfs)	5042.9	Conv. (cfs)	0.6	5042.0	0.3
Length Wtd. (ft)	100.00	Wetted Per. (ft)	2.16	80.96	2.57
Min Ch El (ft)	6917.36	Shear (lb/sq ft)	0.01	0.22	0.01
Alpha	1.00	Stream Power (lb/ft s)	0.00	0.32	0.00
Frctn Loss (ft)	0.40	Cum Volume (acre-ft)	0.00	0.29	0.00
C & E Loss (ft)	0.00	Cum SA (acres)	0.00	0.22	0.00

Plan: Plan 02 WEST CHAN EX NEW chan-west-pr RS: 0 Profile: PF 1

E.G. Elev (ft)	6919.72	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.070	
W.S. Elev (ft)	6919.64	Reach Len. (ft)			
Crit W.S. (ft)	6919.12	Flow Area (sq ft)		98.31	
E.G. Slope (ft/ft)	0.012995	Area (sq ft)		98.31	
Q Total (cfs)	219.00	Flow (cfs)		219.00	
Top Width (ft)	111.26	Top Width (ft)		111.26	
Vel Total (ft/s)	2.23	Avg. Vel. (ft/s)		2.23	
Max Chl Dpth (ft)	1.64	Hydr. Depth (ft)		0.88	
Conv. Total (cfs)	1921.1	Conv. (cfs)		1921.1	
Length Wtd. (ft)		Wetted Per. (ft)		111.31	
Min Ch El (ft)	6918.00	Shear (lb/sq ft)		0.72	
Alpha	1.00	Stream Power (lb/ft s)		1.60	
Frctn Loss (ft)		Cum Volume (acre-ft)			
C & E Loss (ft)		Cum SA (acres)			

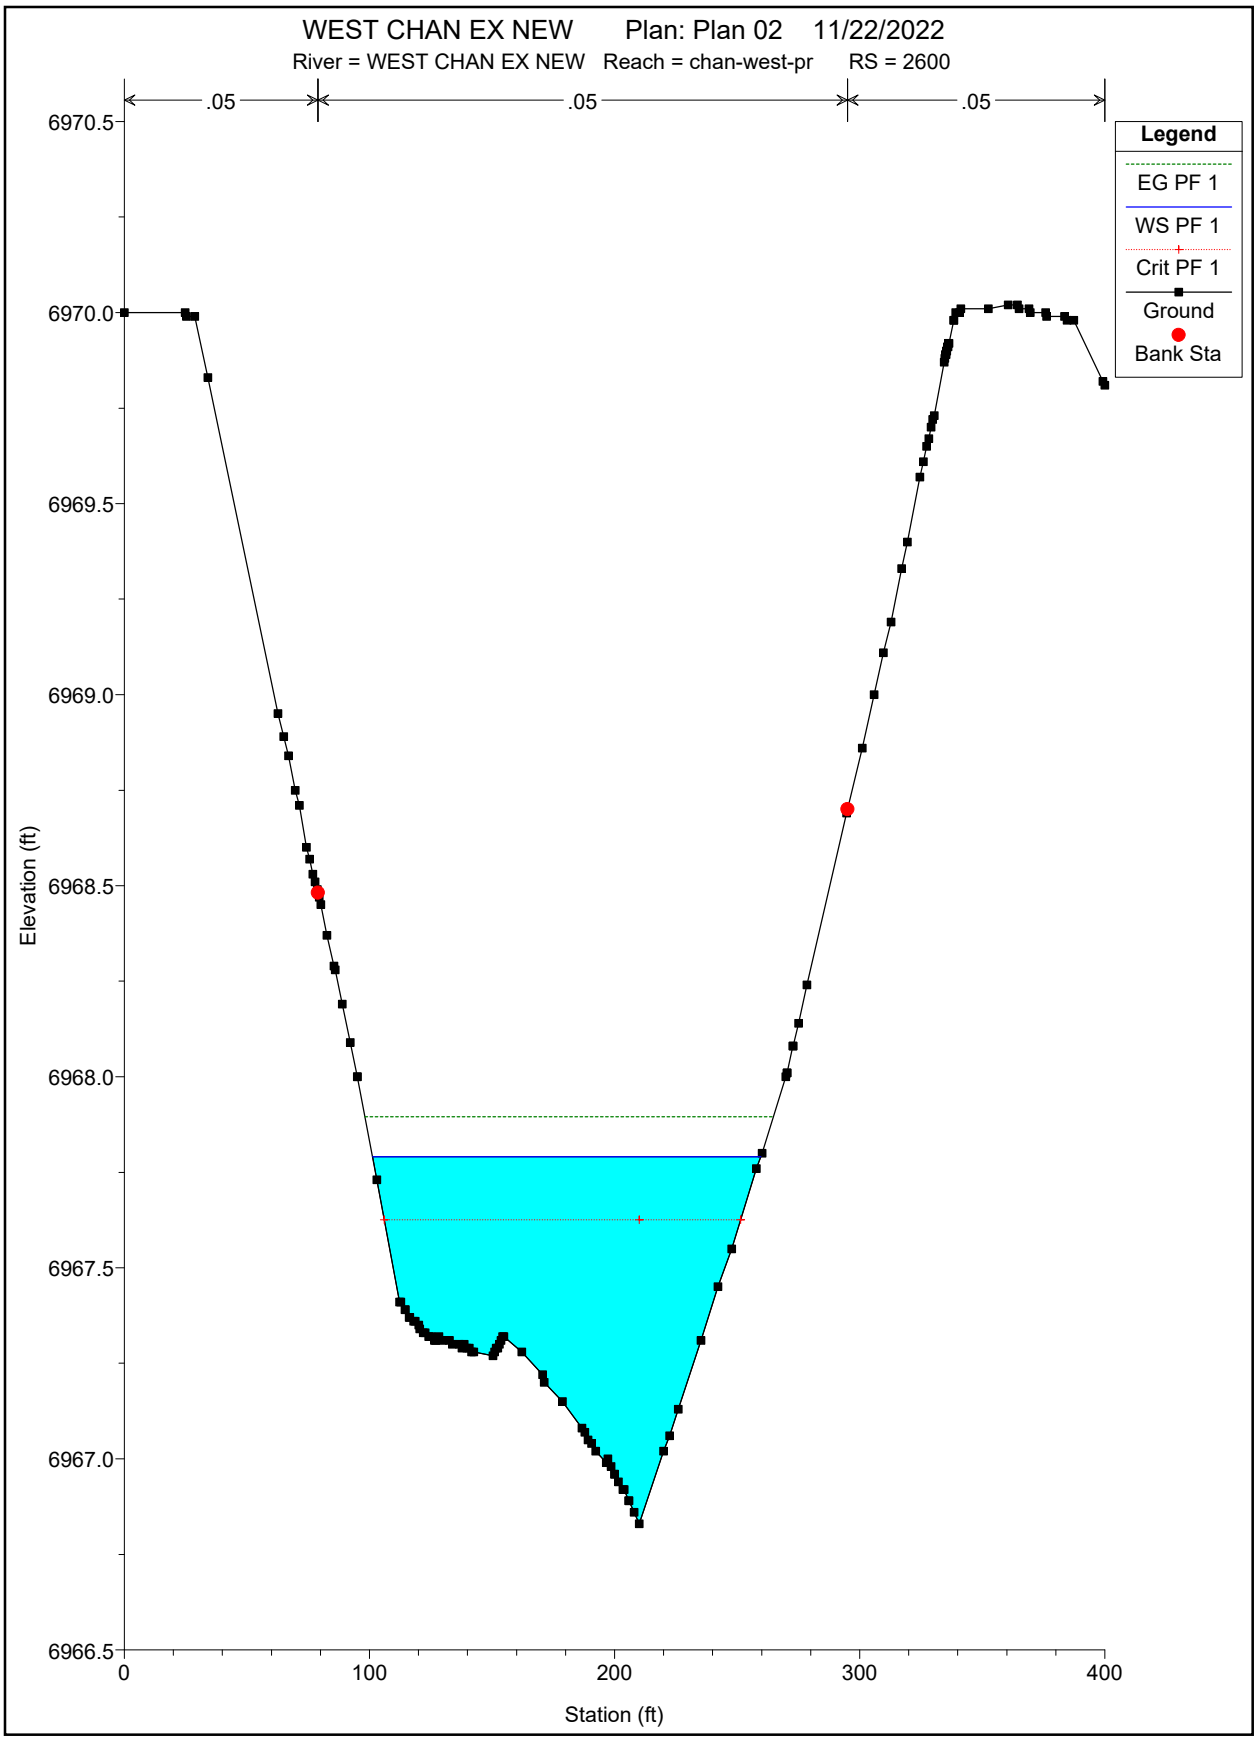
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2600
.05
.05
.05
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6970.5
6970.0
6969.5
6969.0
6968.5
6968.0
6967.5
6967.0
6966.5
Elevation (ft)
0
100
200
300
400
Station (ft)

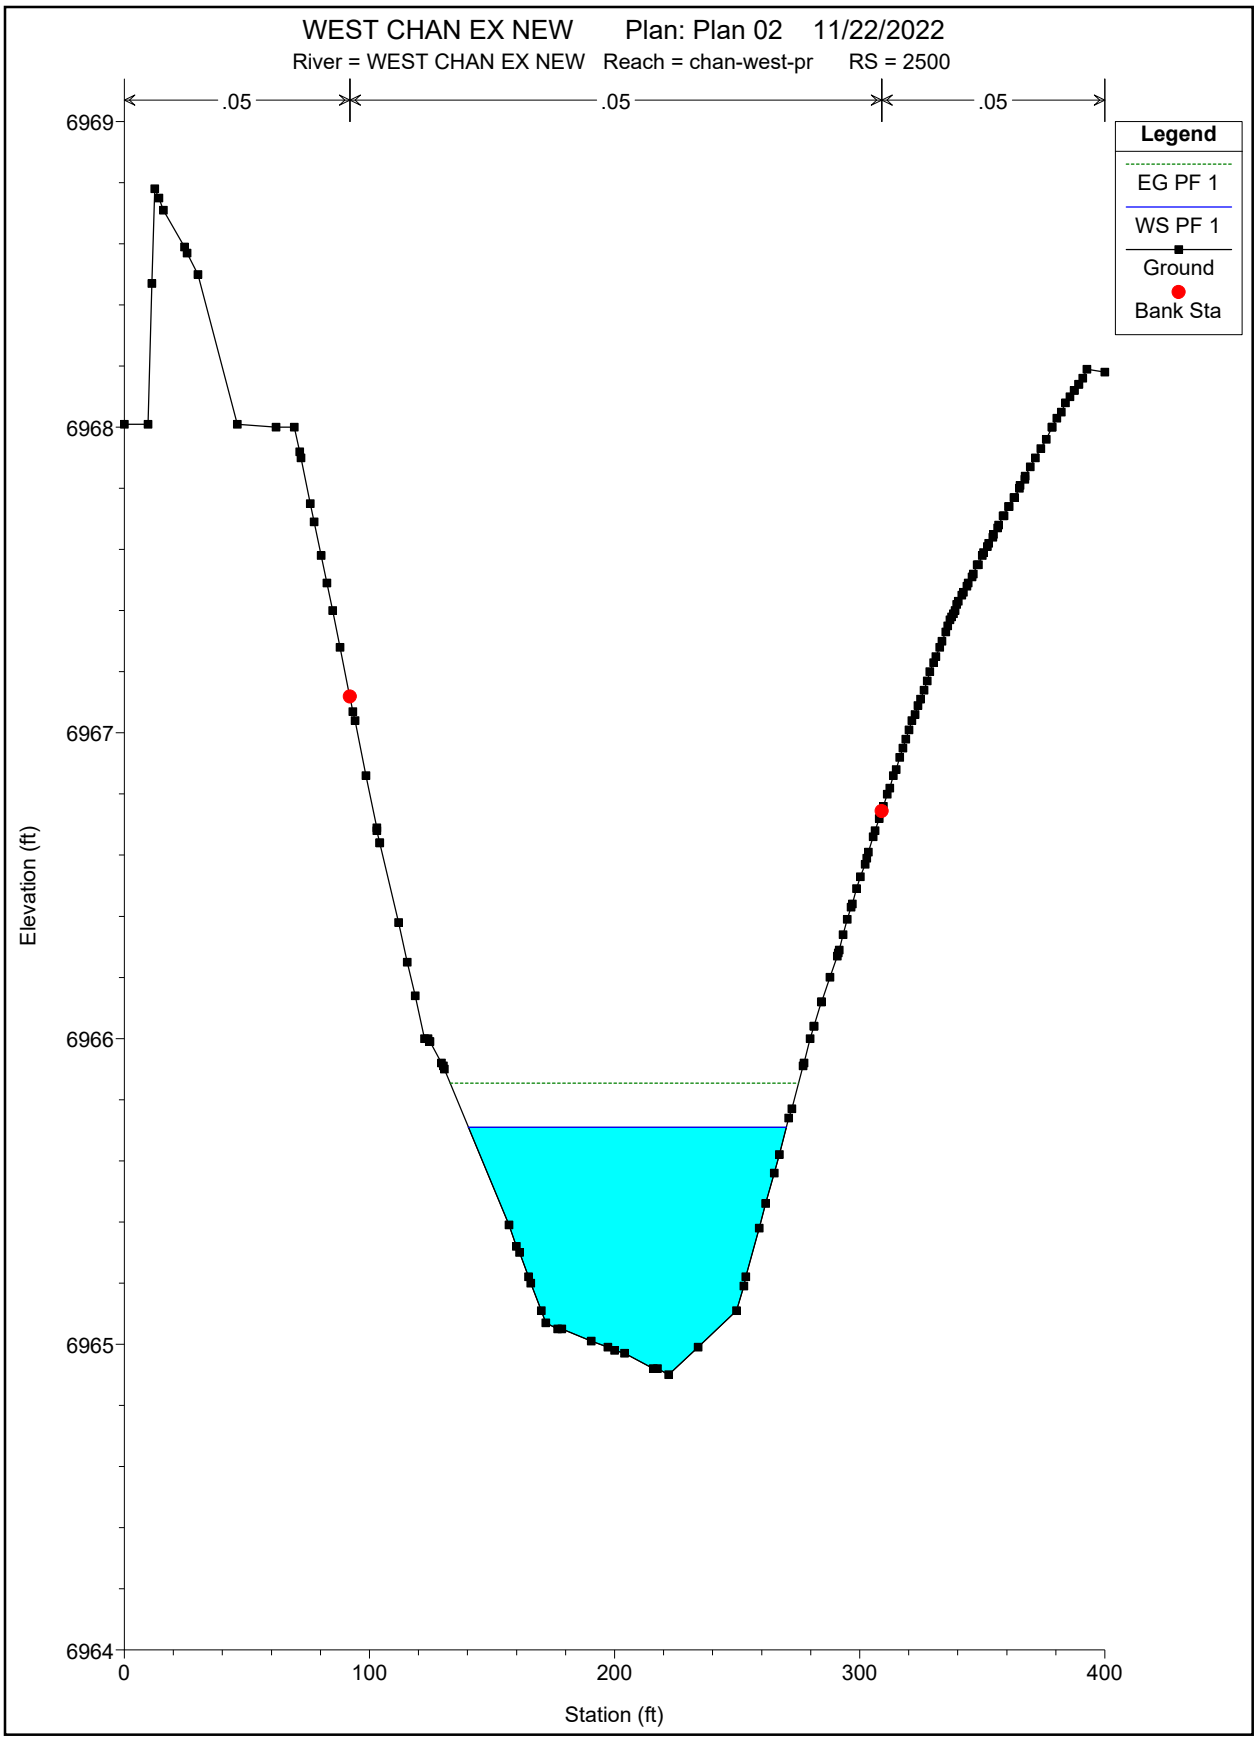
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2500
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6969
6968
6967
6966
6965
6964
Elevation (ft)
0
100
200
300
400
Station (ft)

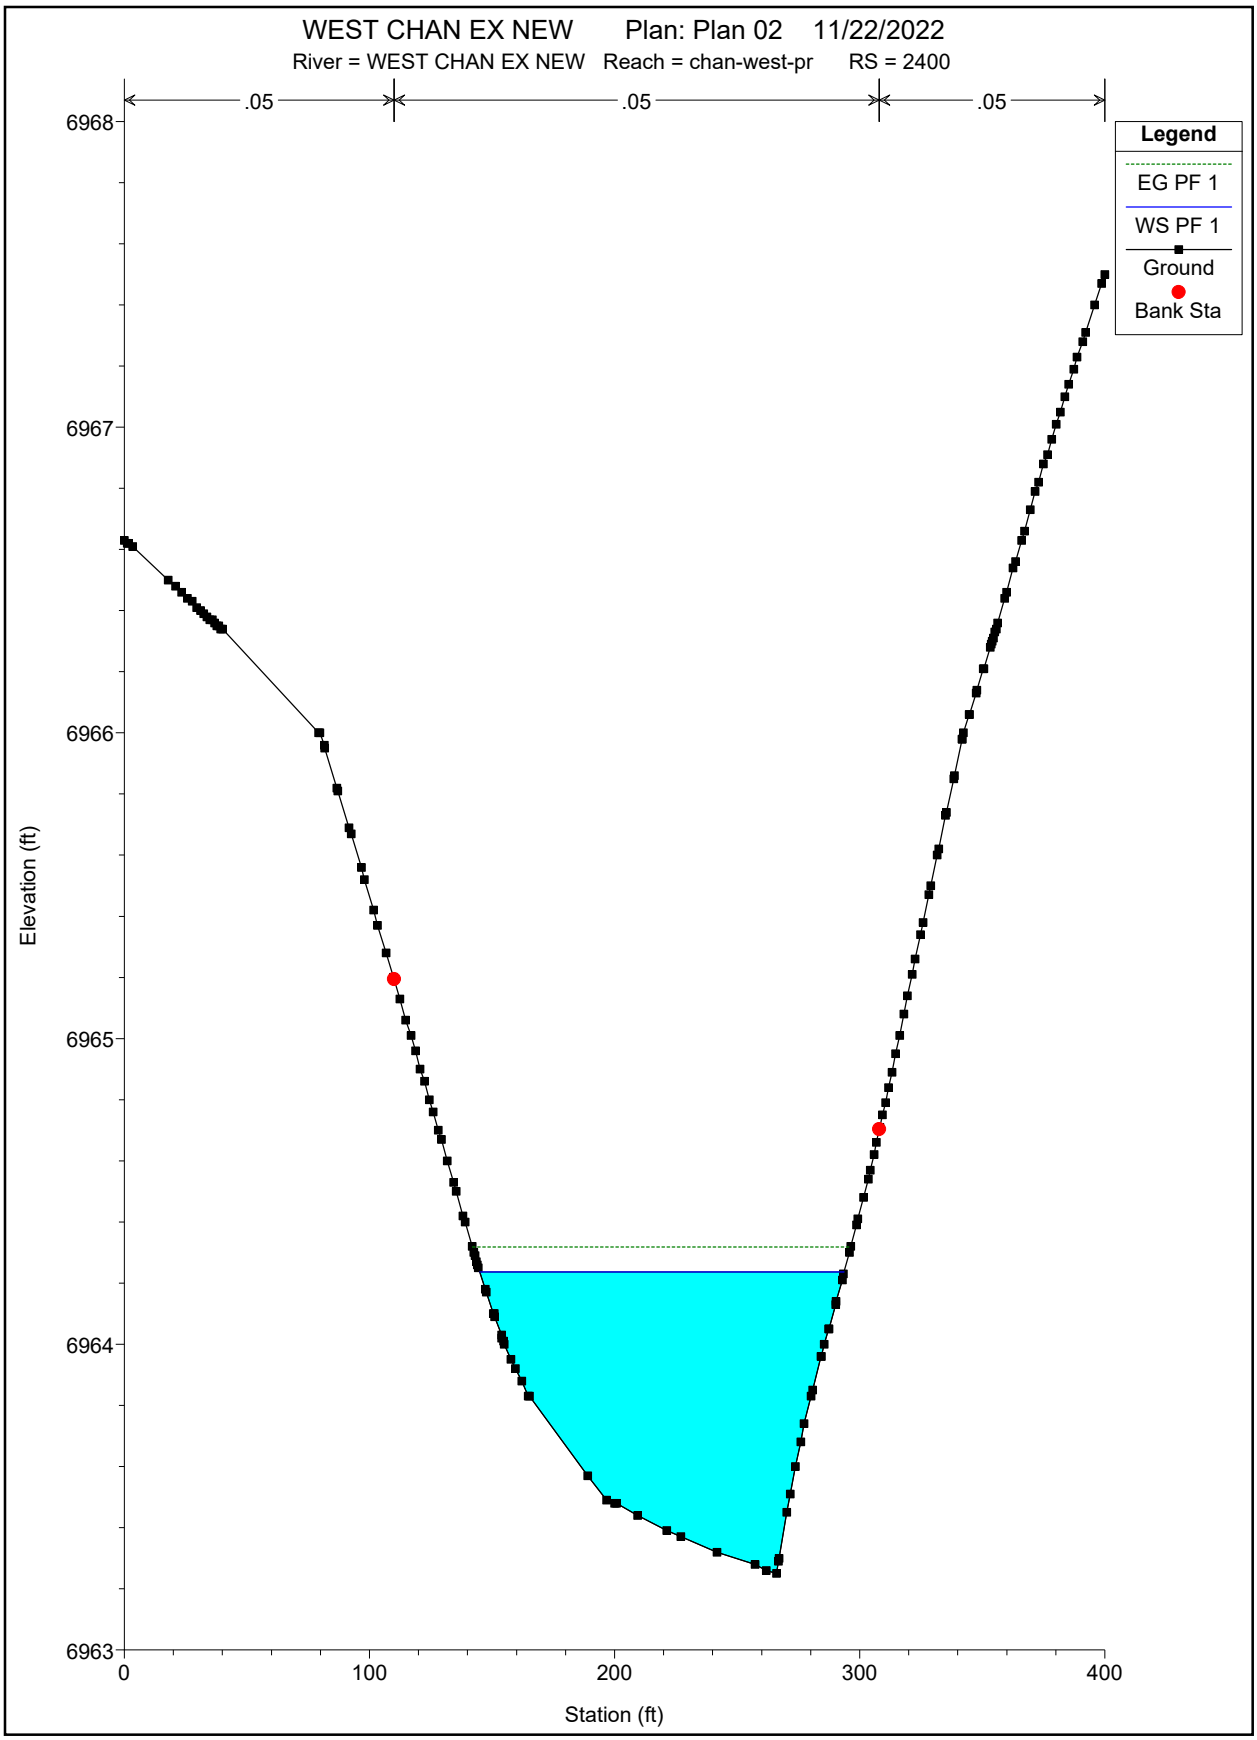
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2400
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6968
6967
6966
6965
6964
6963
Elevation (ft)
0
100
200
300
400
Station (ft)

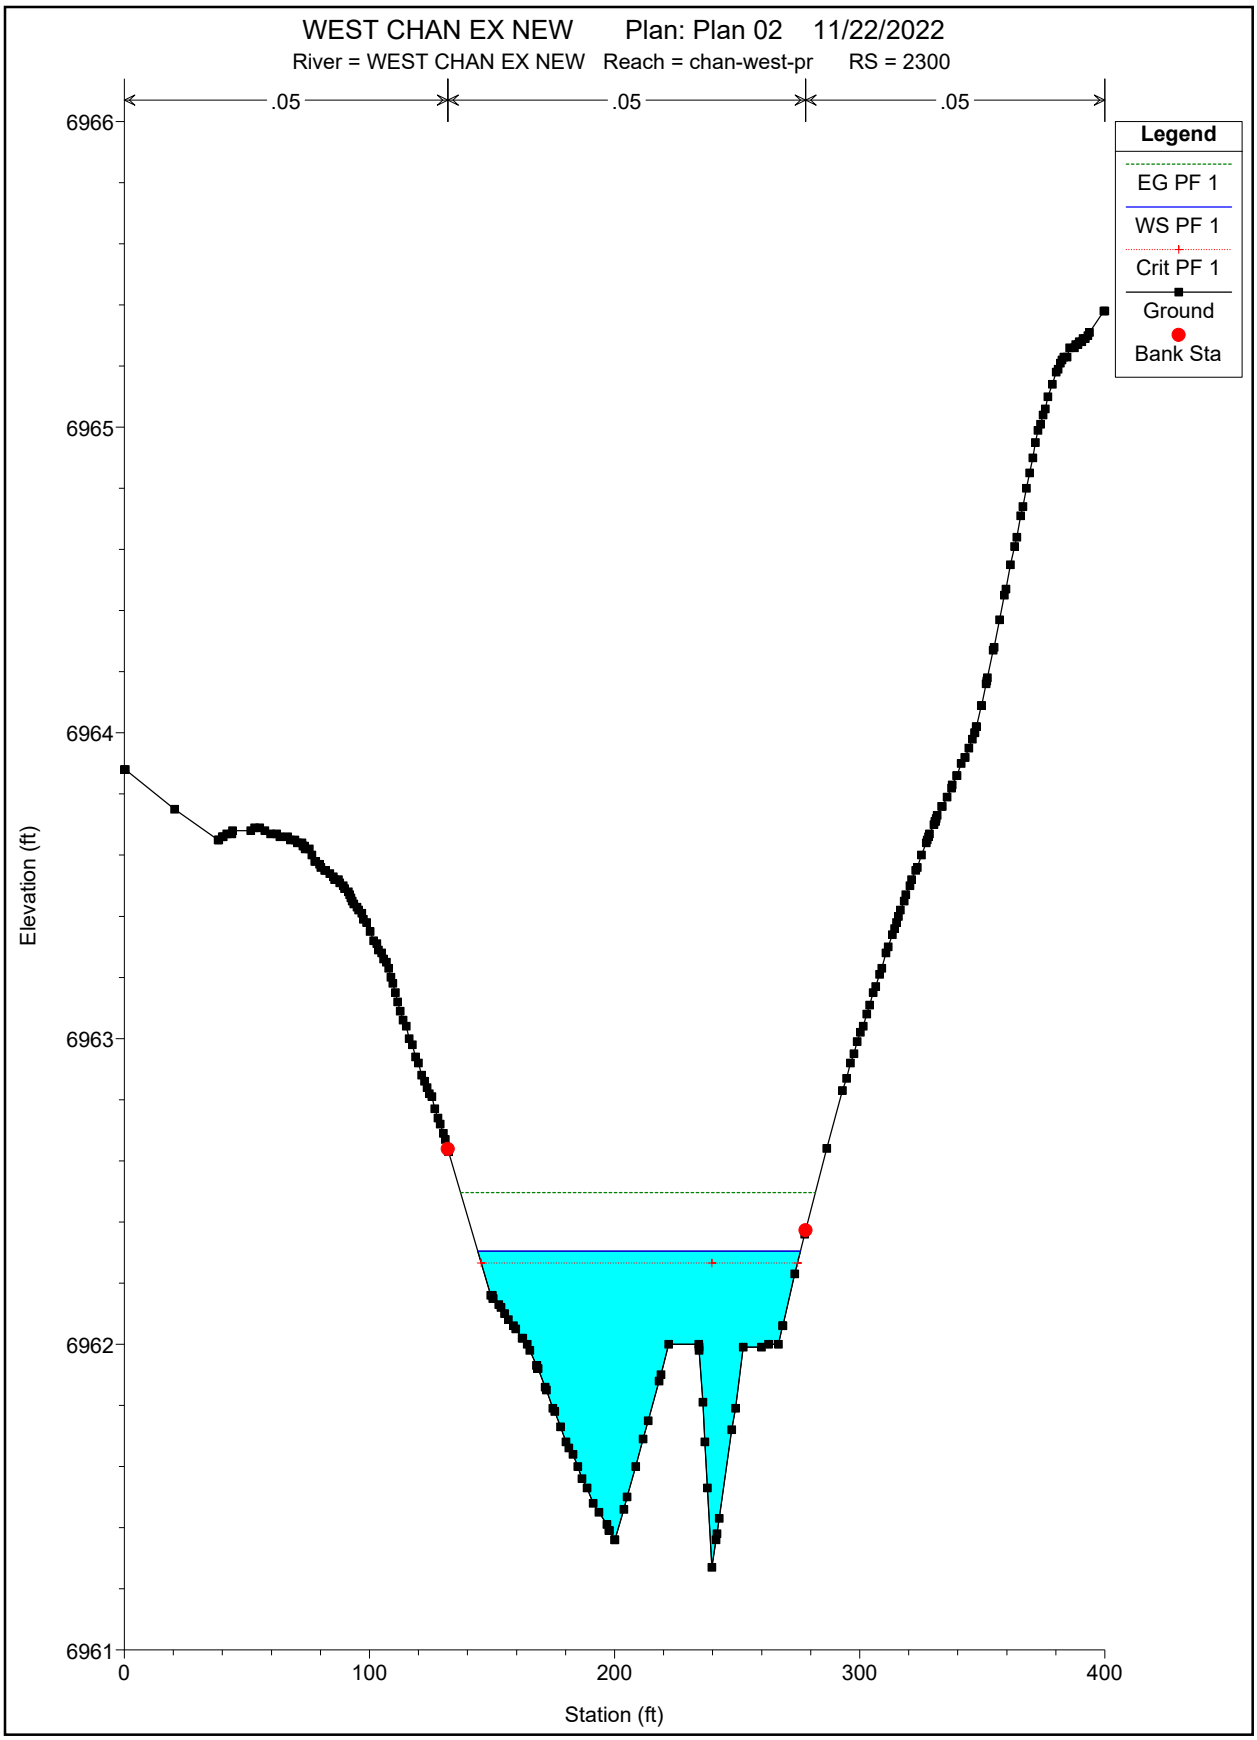
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2300
.05
.05
.05
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6966
6965
6964
6963
6962
6961
Elevation (ft)
0
100
200
300
400
Station (ft)

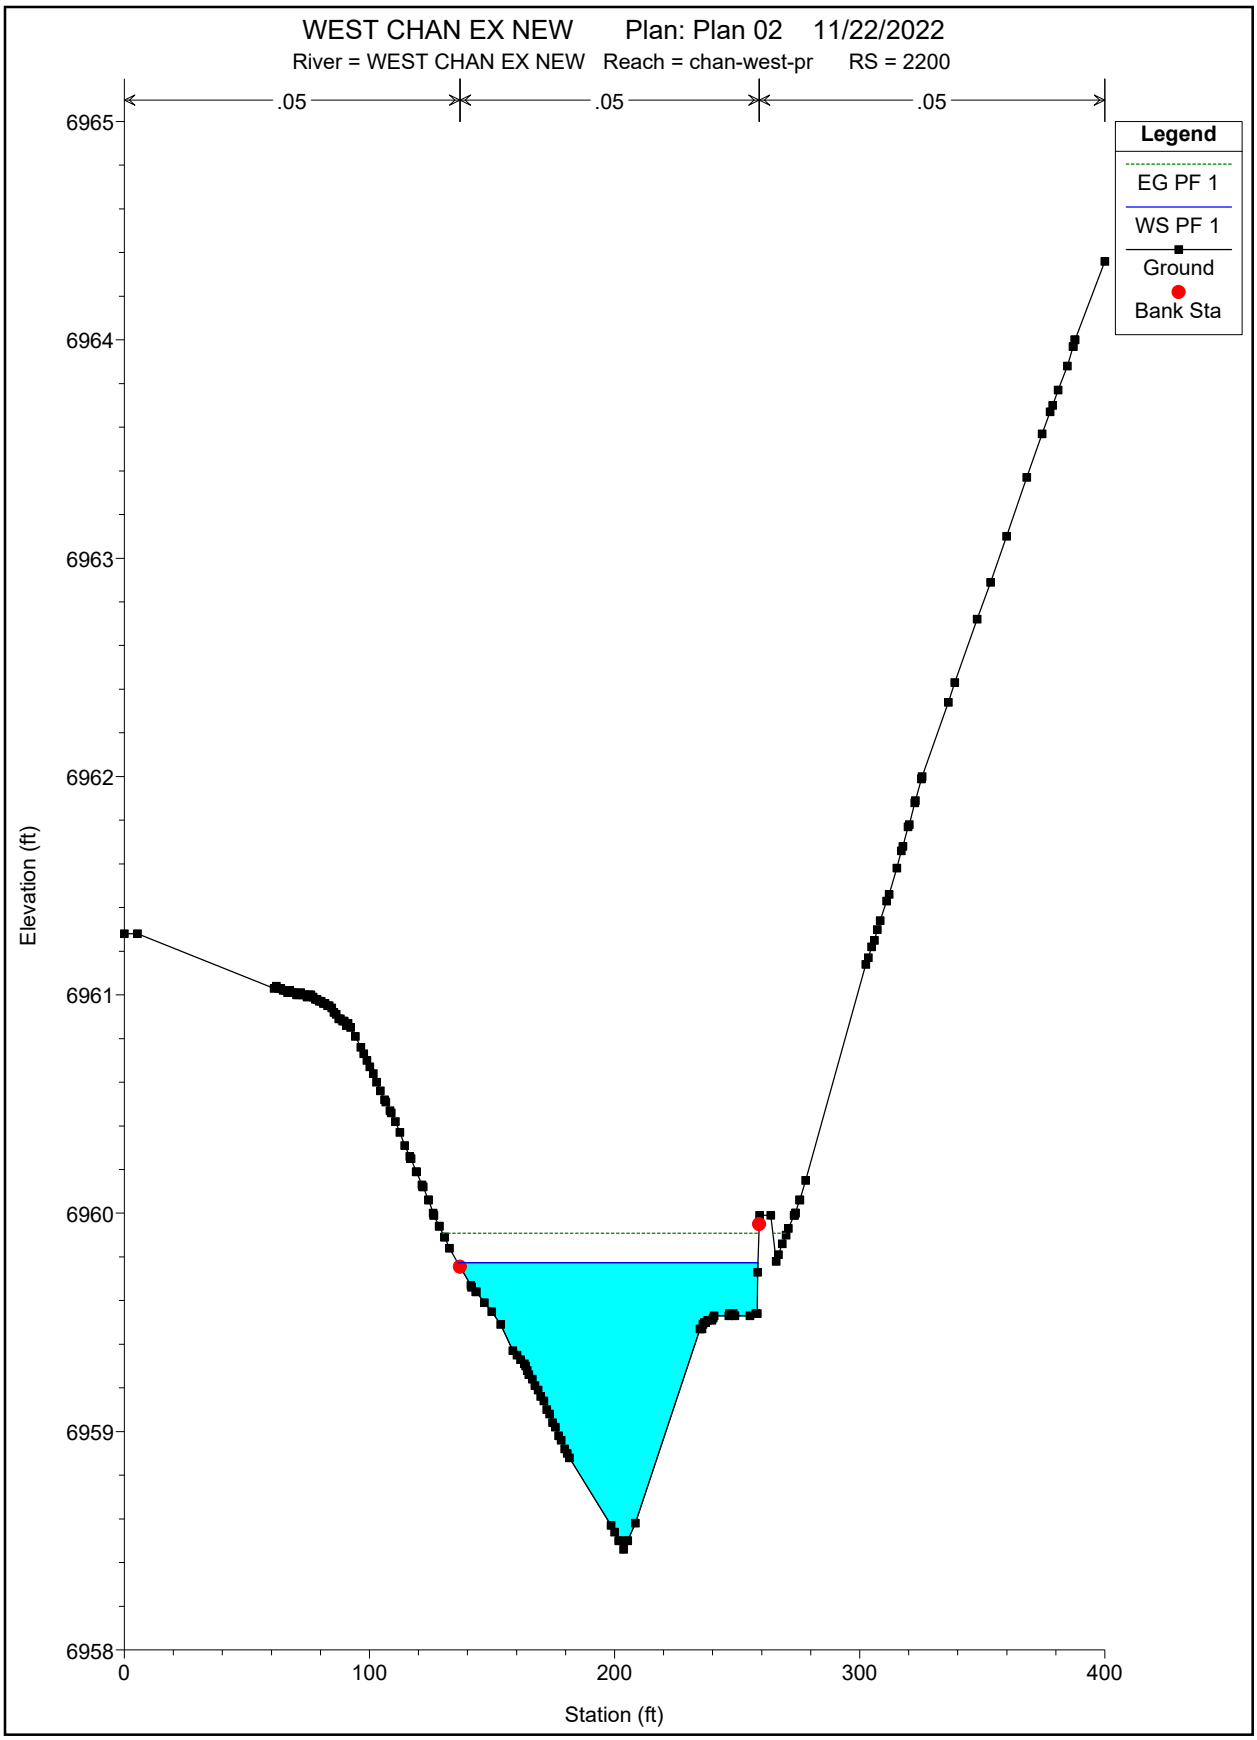
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2200
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6965
6964
6963
6962
6961
6960
6959
6958
0
100
200
300
400
Station (ft)

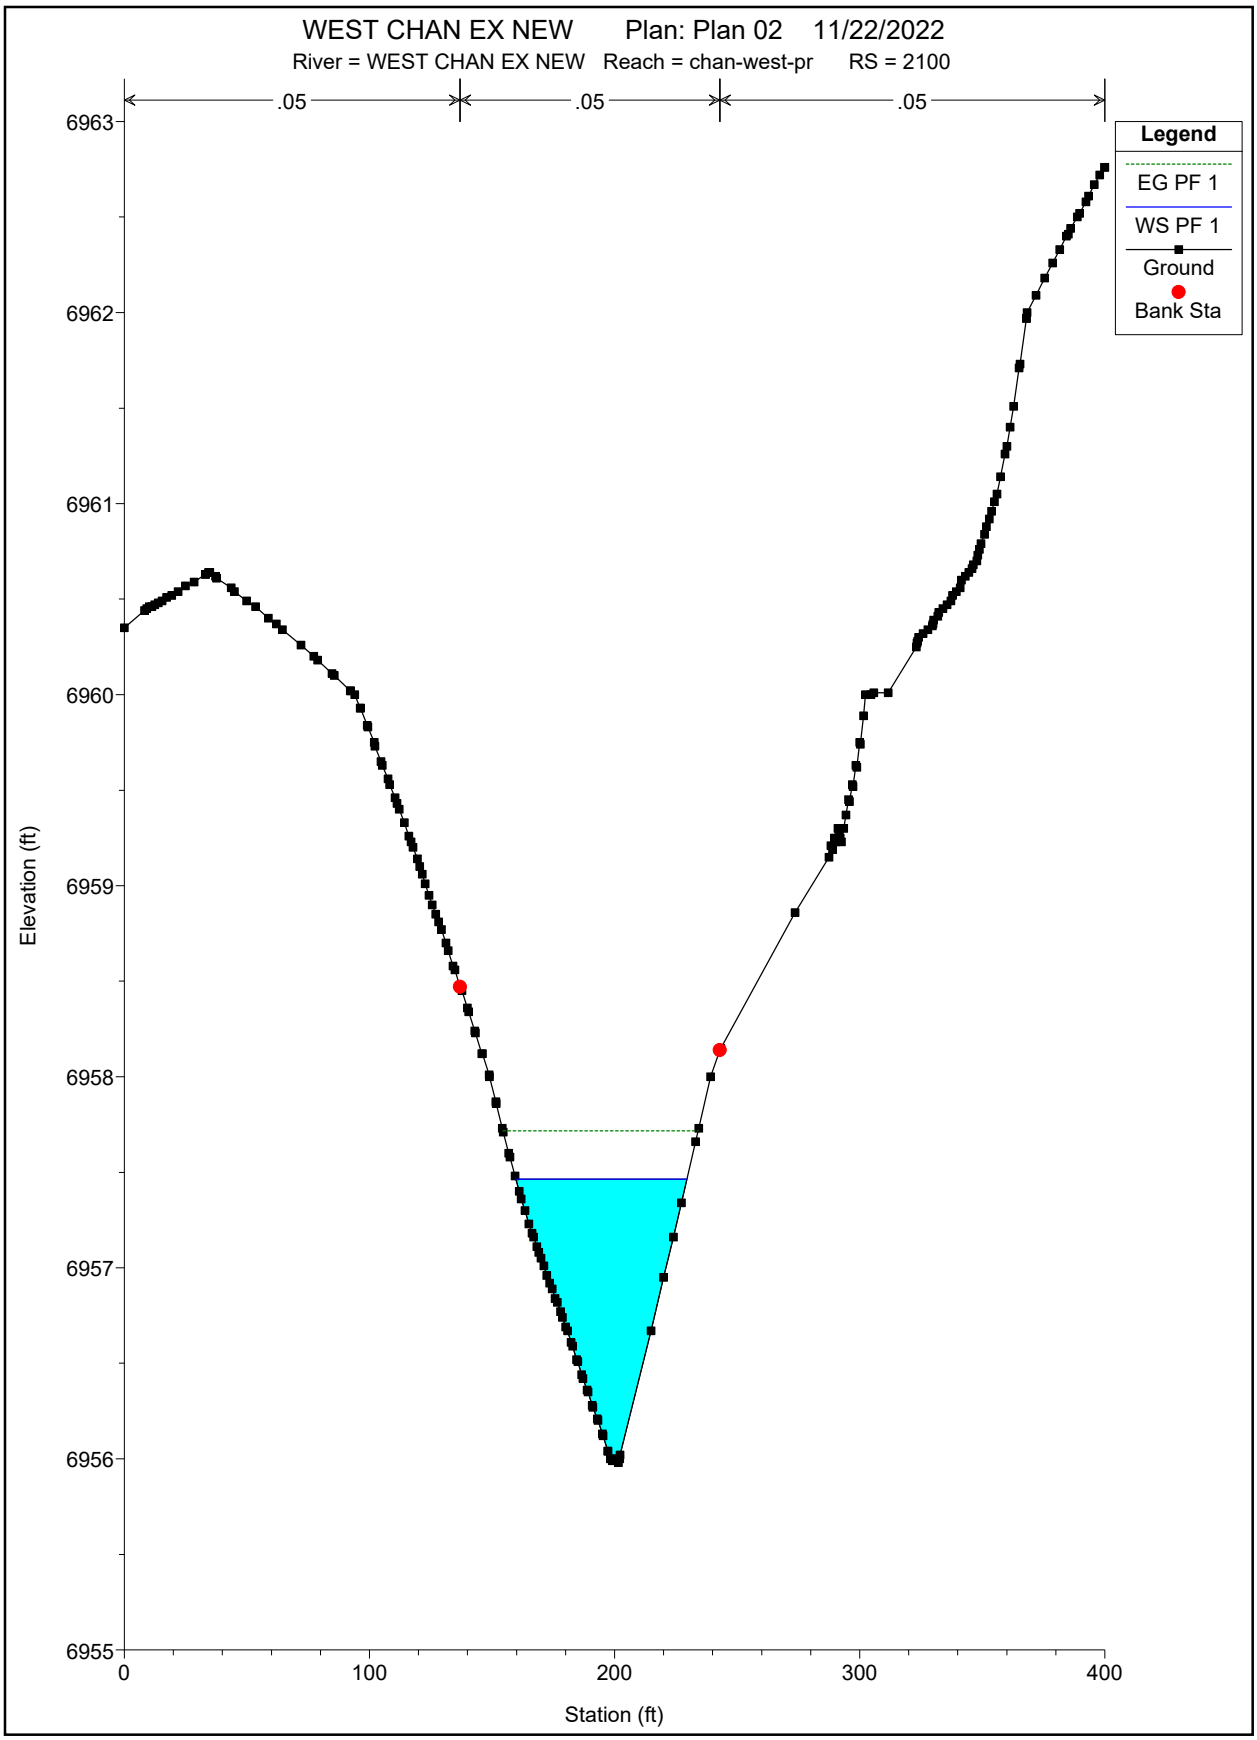
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2100
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6963
6962
6961
6960
6959
6958
6957
6956
6955
0
100
200
300
400
Station (ft)

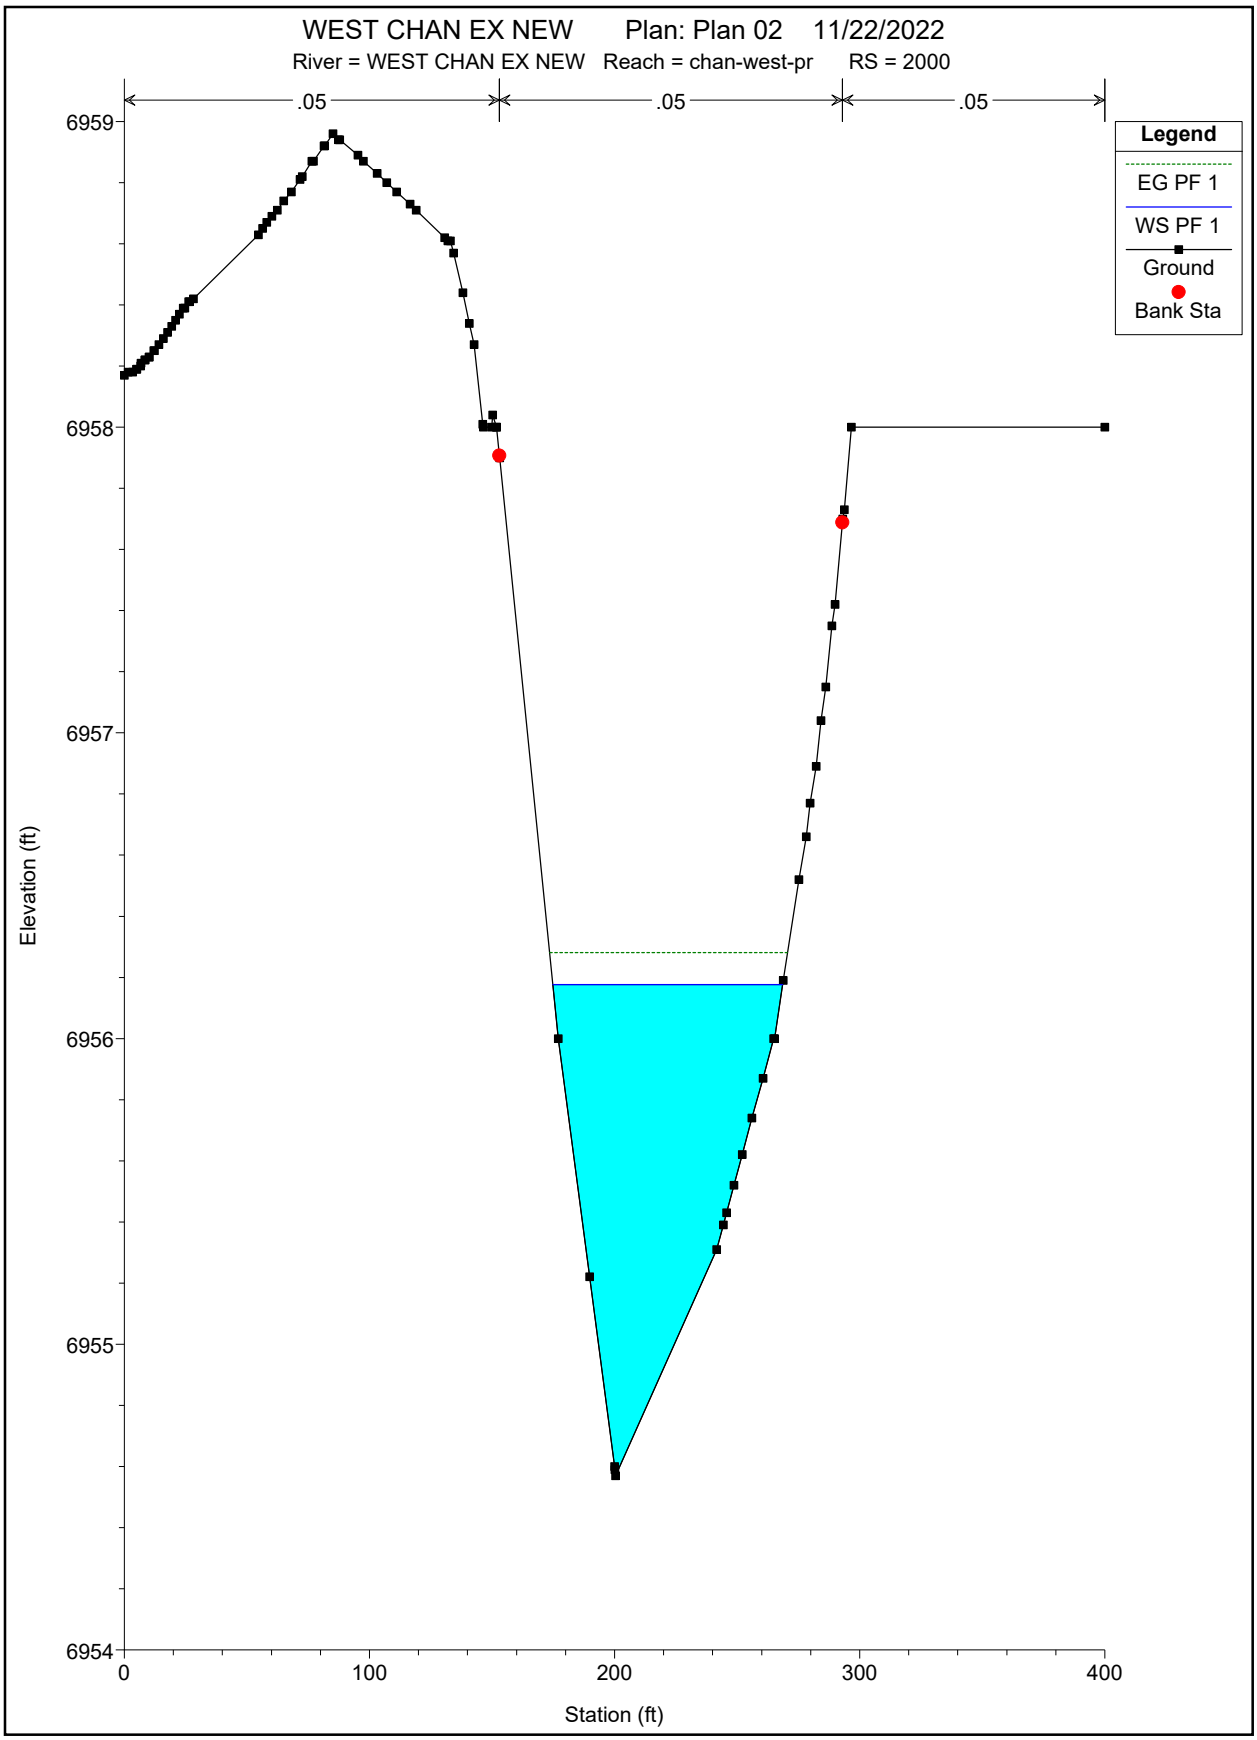
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 2000
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6959
6958
6957
6956
6955
6954
Elevation (ft)
0
100
200
300
400
Station (ft)

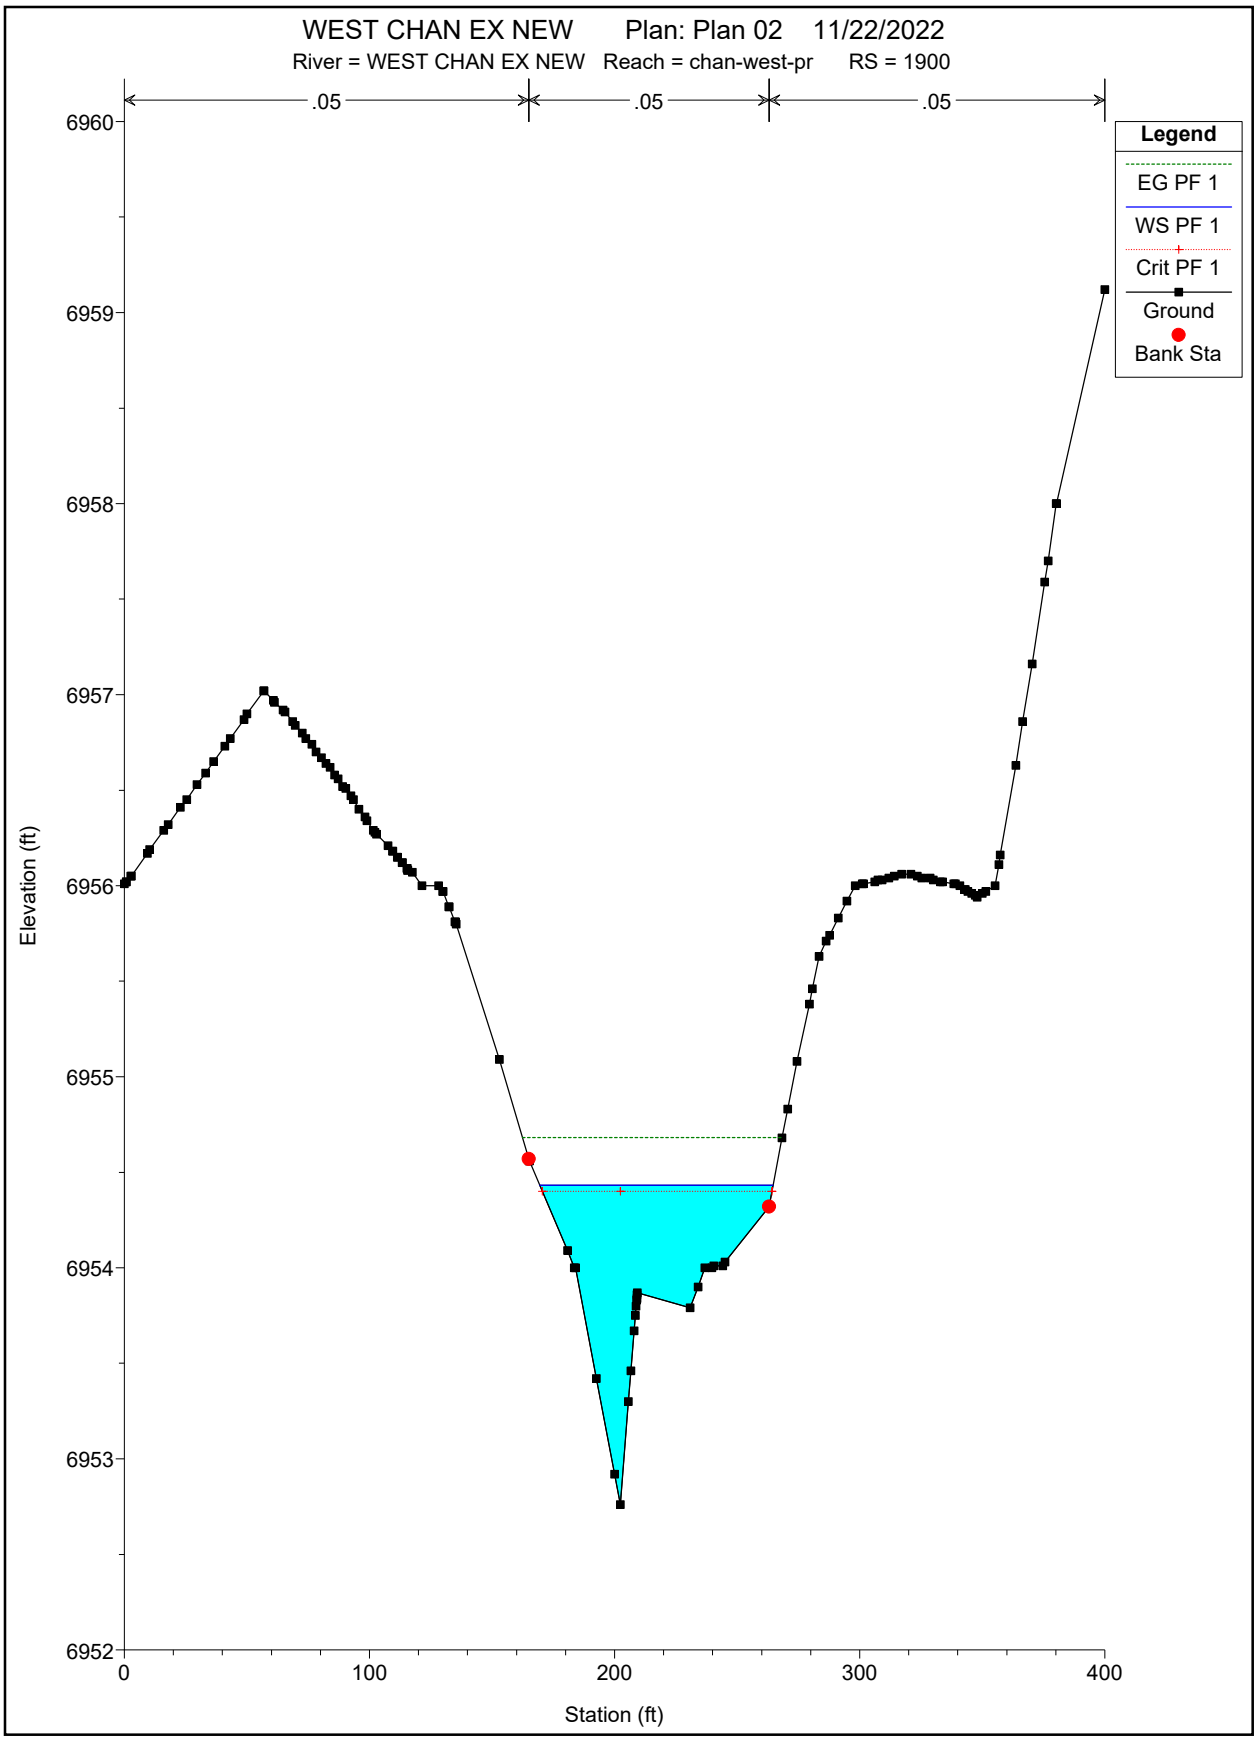
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1900
.05
.05
.05
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6960
6959
6958
6957
6956
6955
6954
6953
6952
0
100
200
300
400
Station (ft)

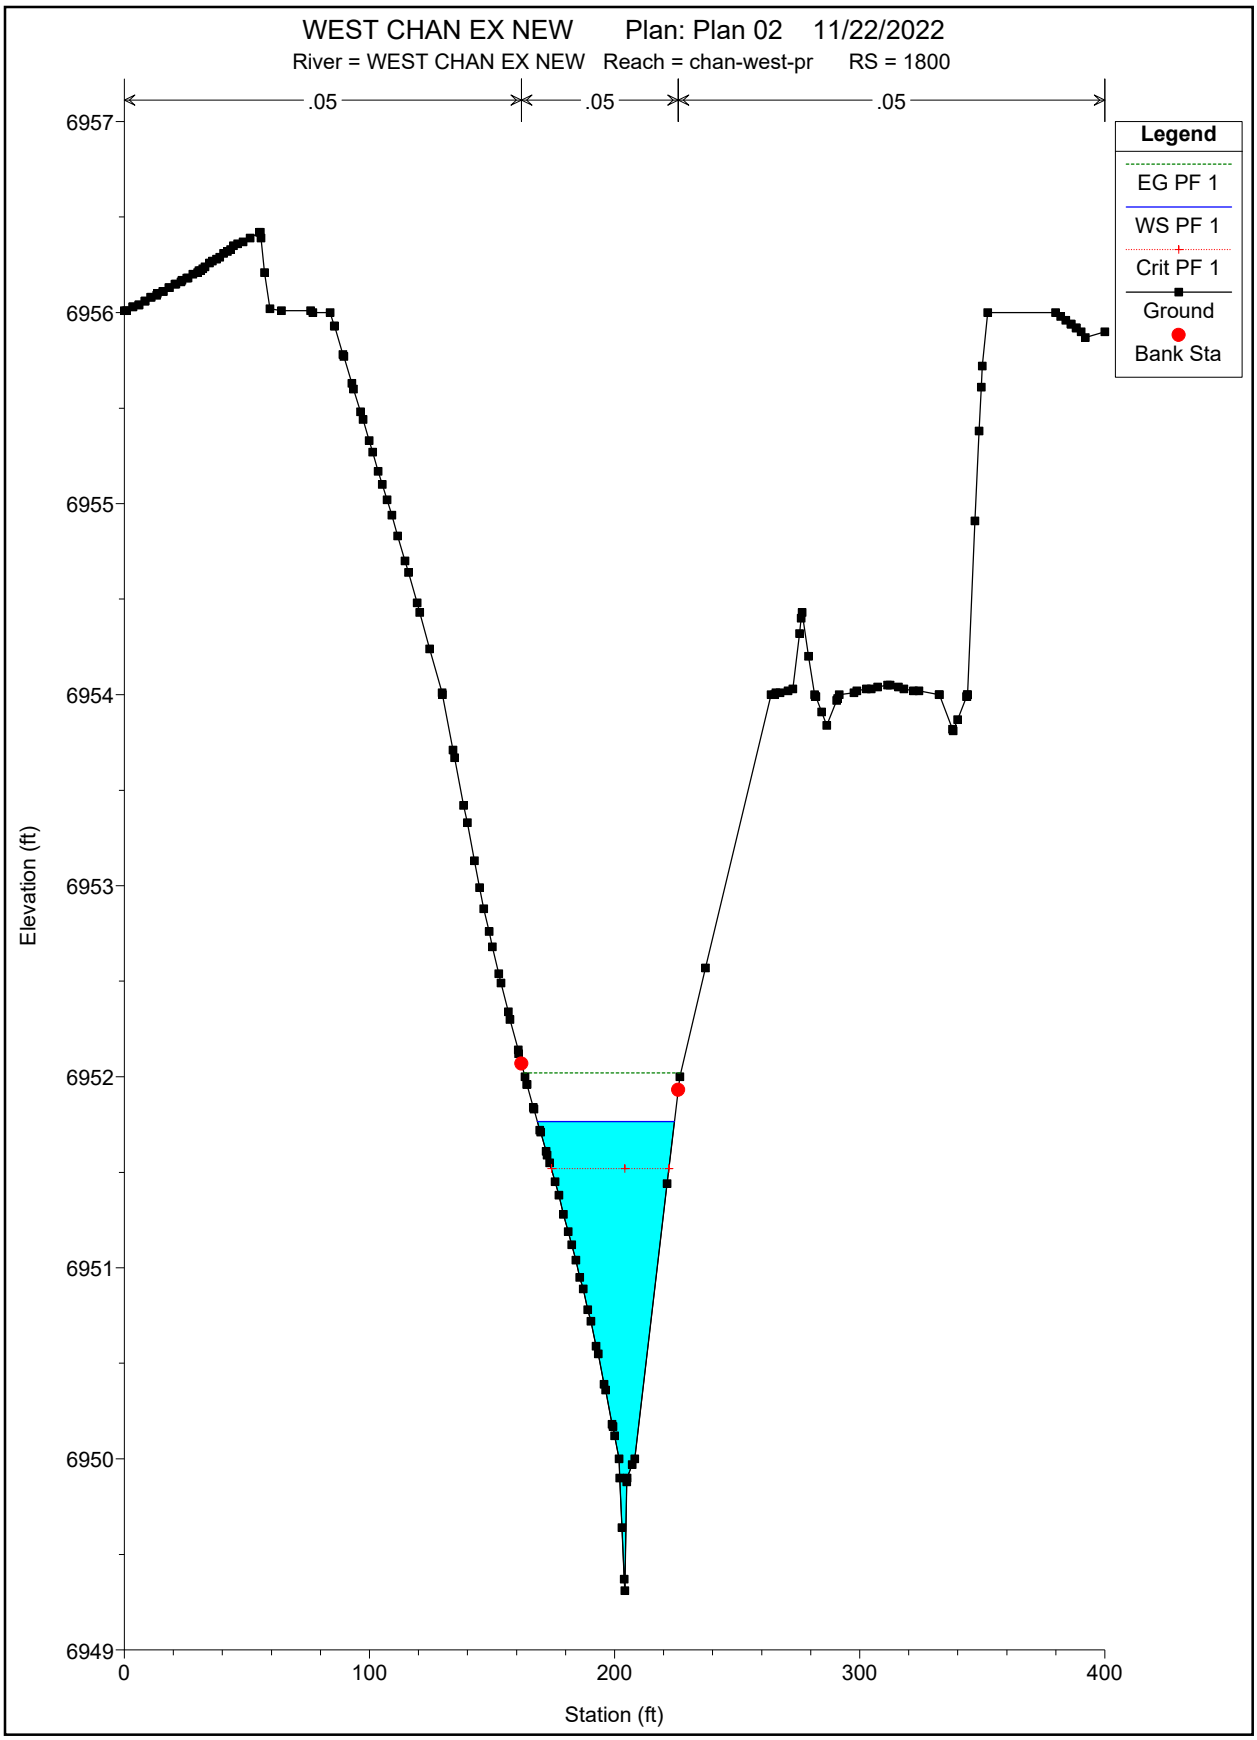
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1800
.05
.05
.05
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6957
6956
6955
6954
6953
6952
6951
6950
6949
0
100
200
300
400
Station (ft)

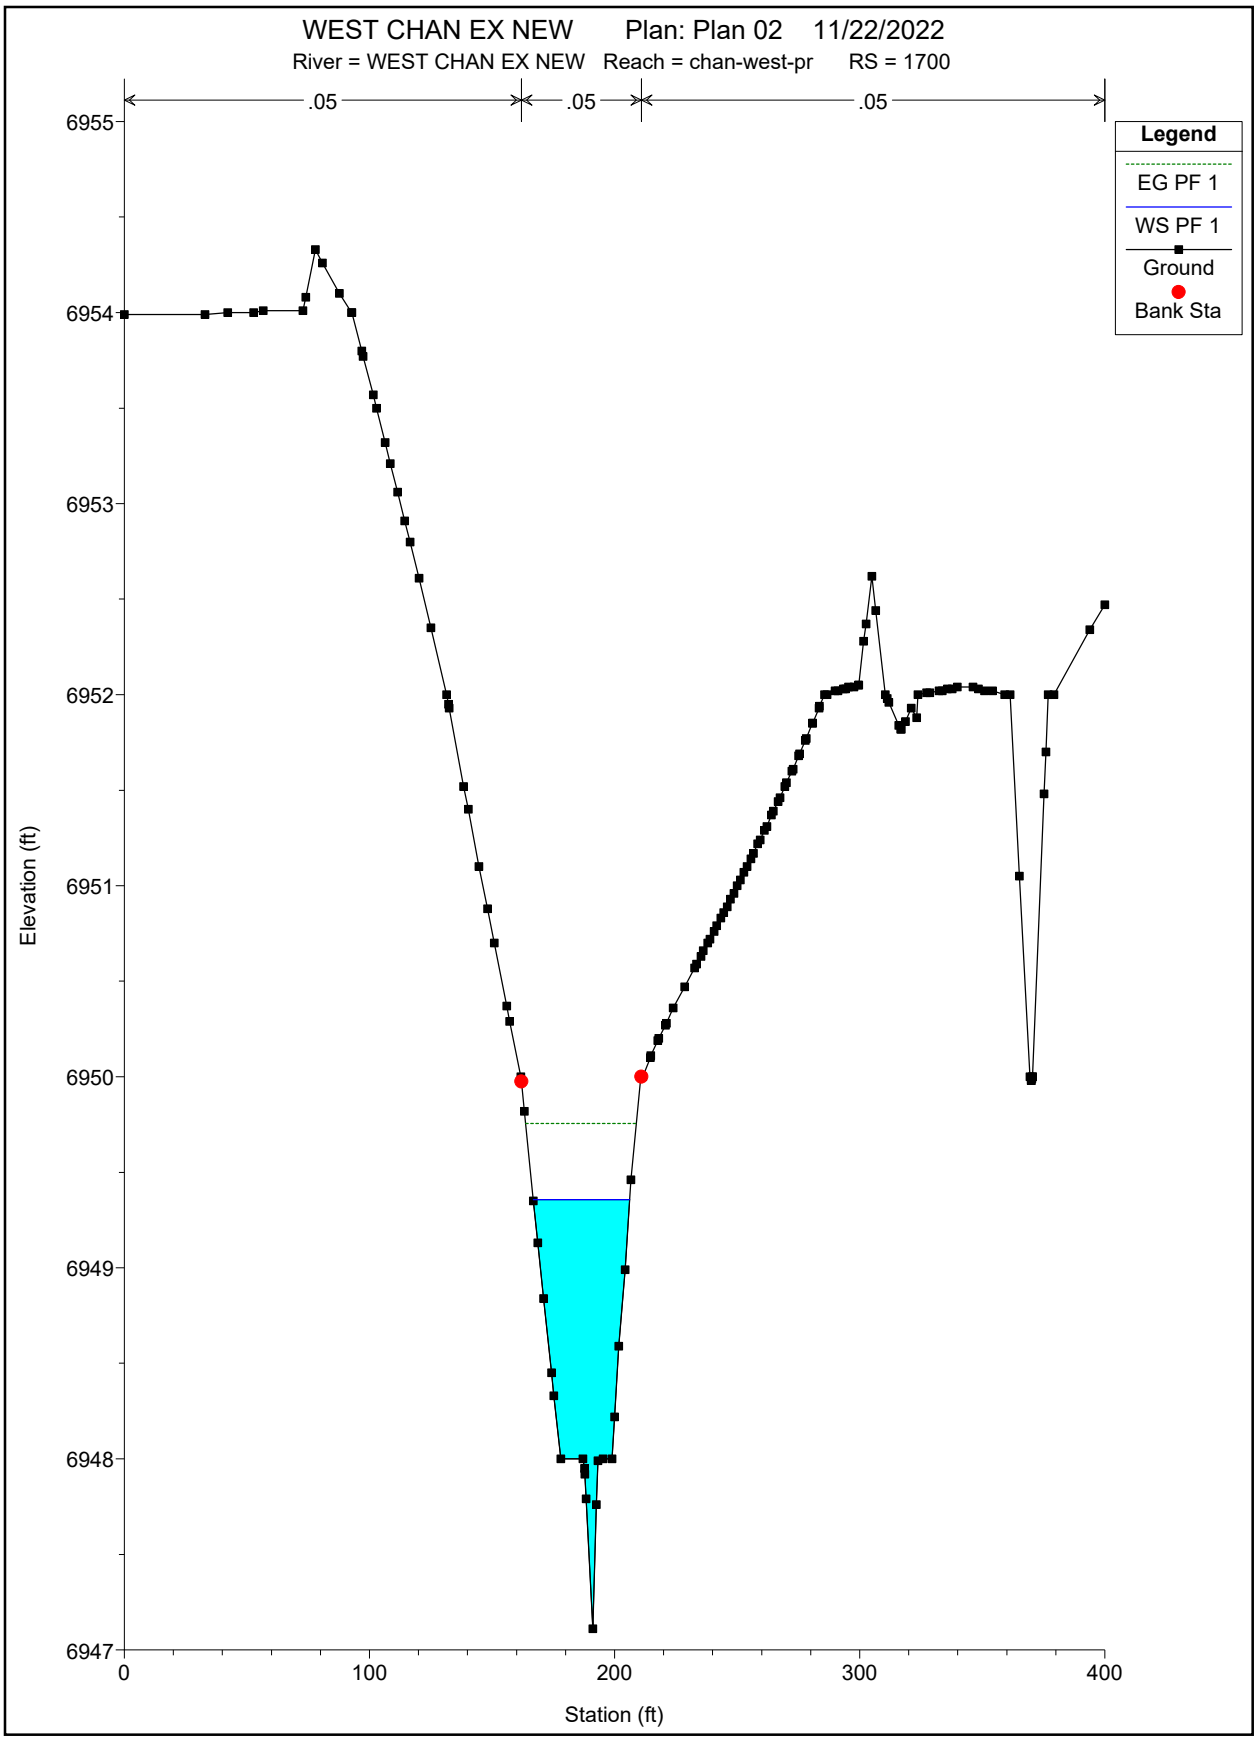
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1700
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6955
6954
6953
6952
6951
6950
6949
6948
6947
0
100
200
300
400
Station (ft)

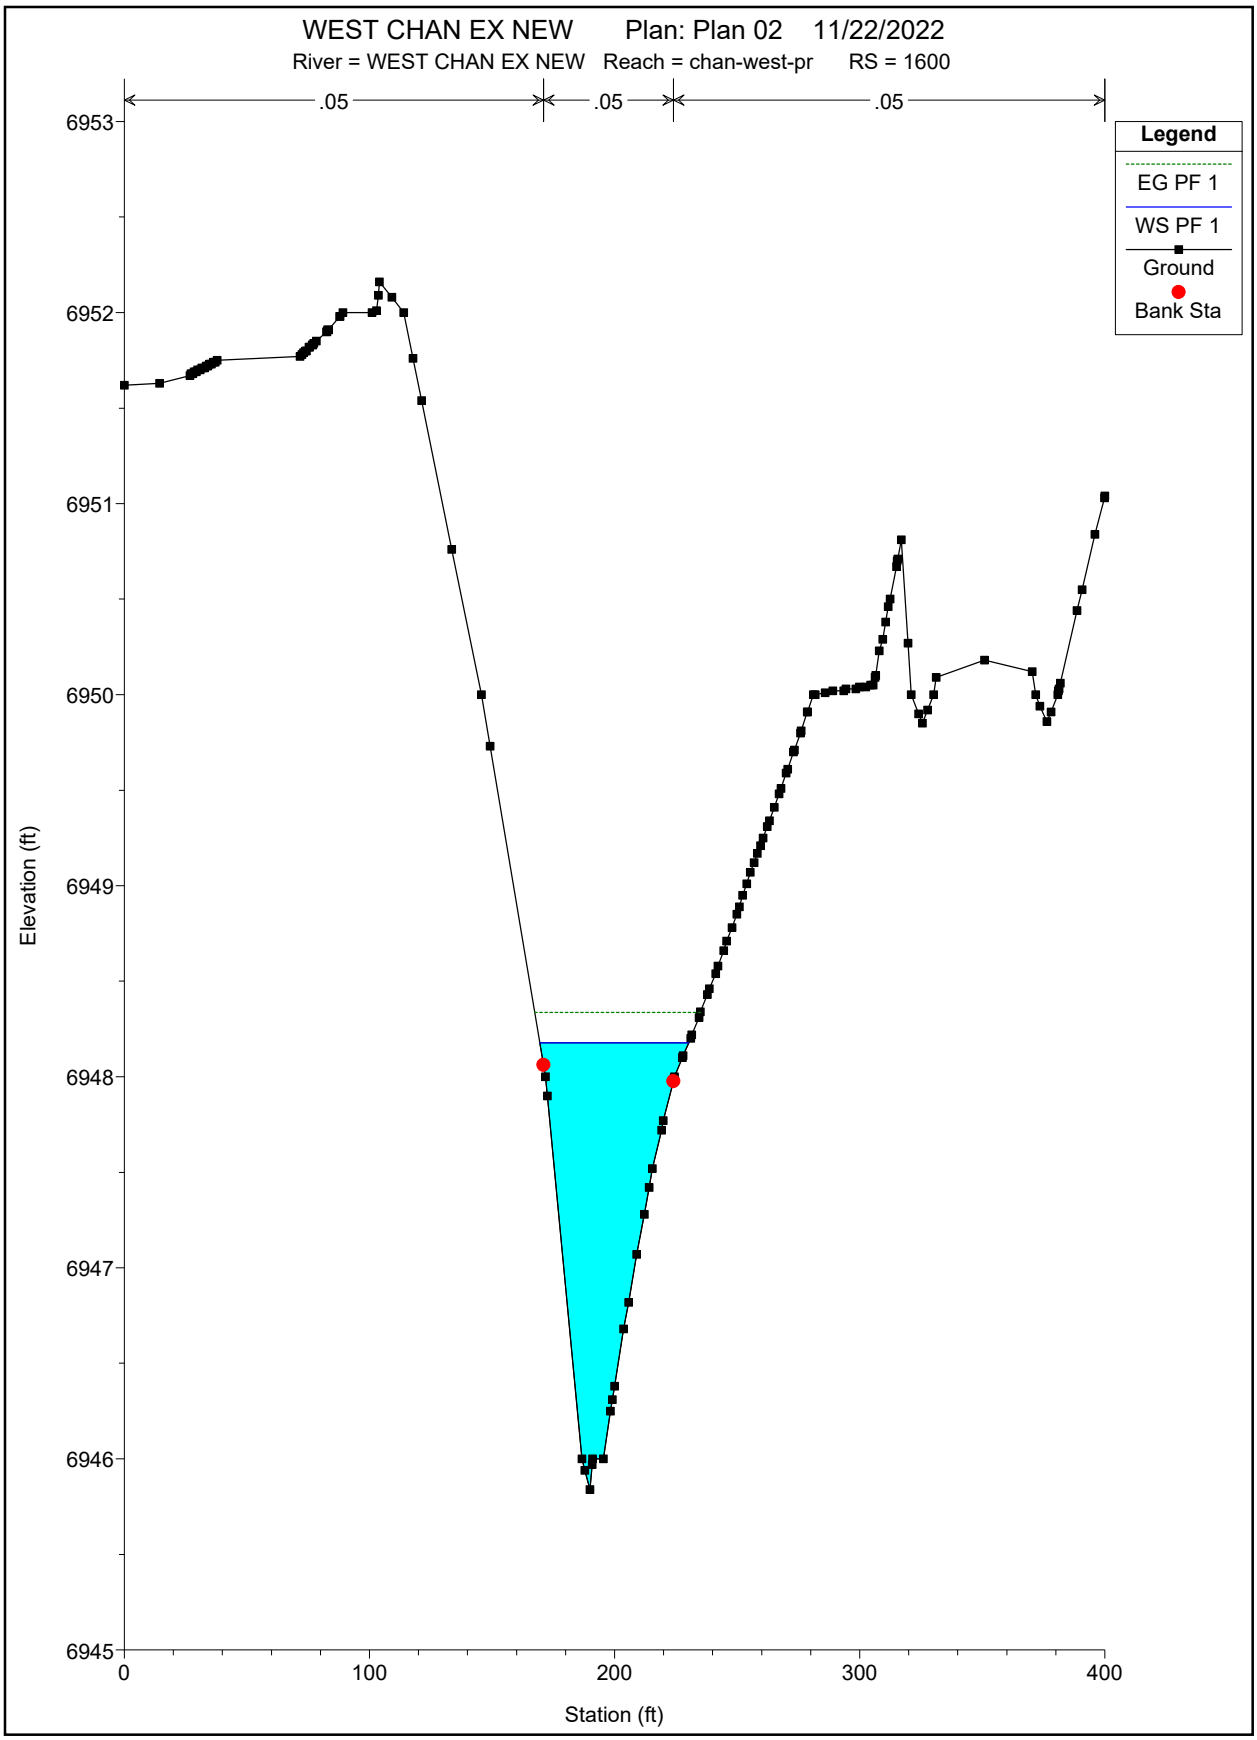
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1600
.05
.05
.05
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6953
6952
6951
6950
6949
6948
6947
6946
6945
0
100
200
300
400
Station (ft)

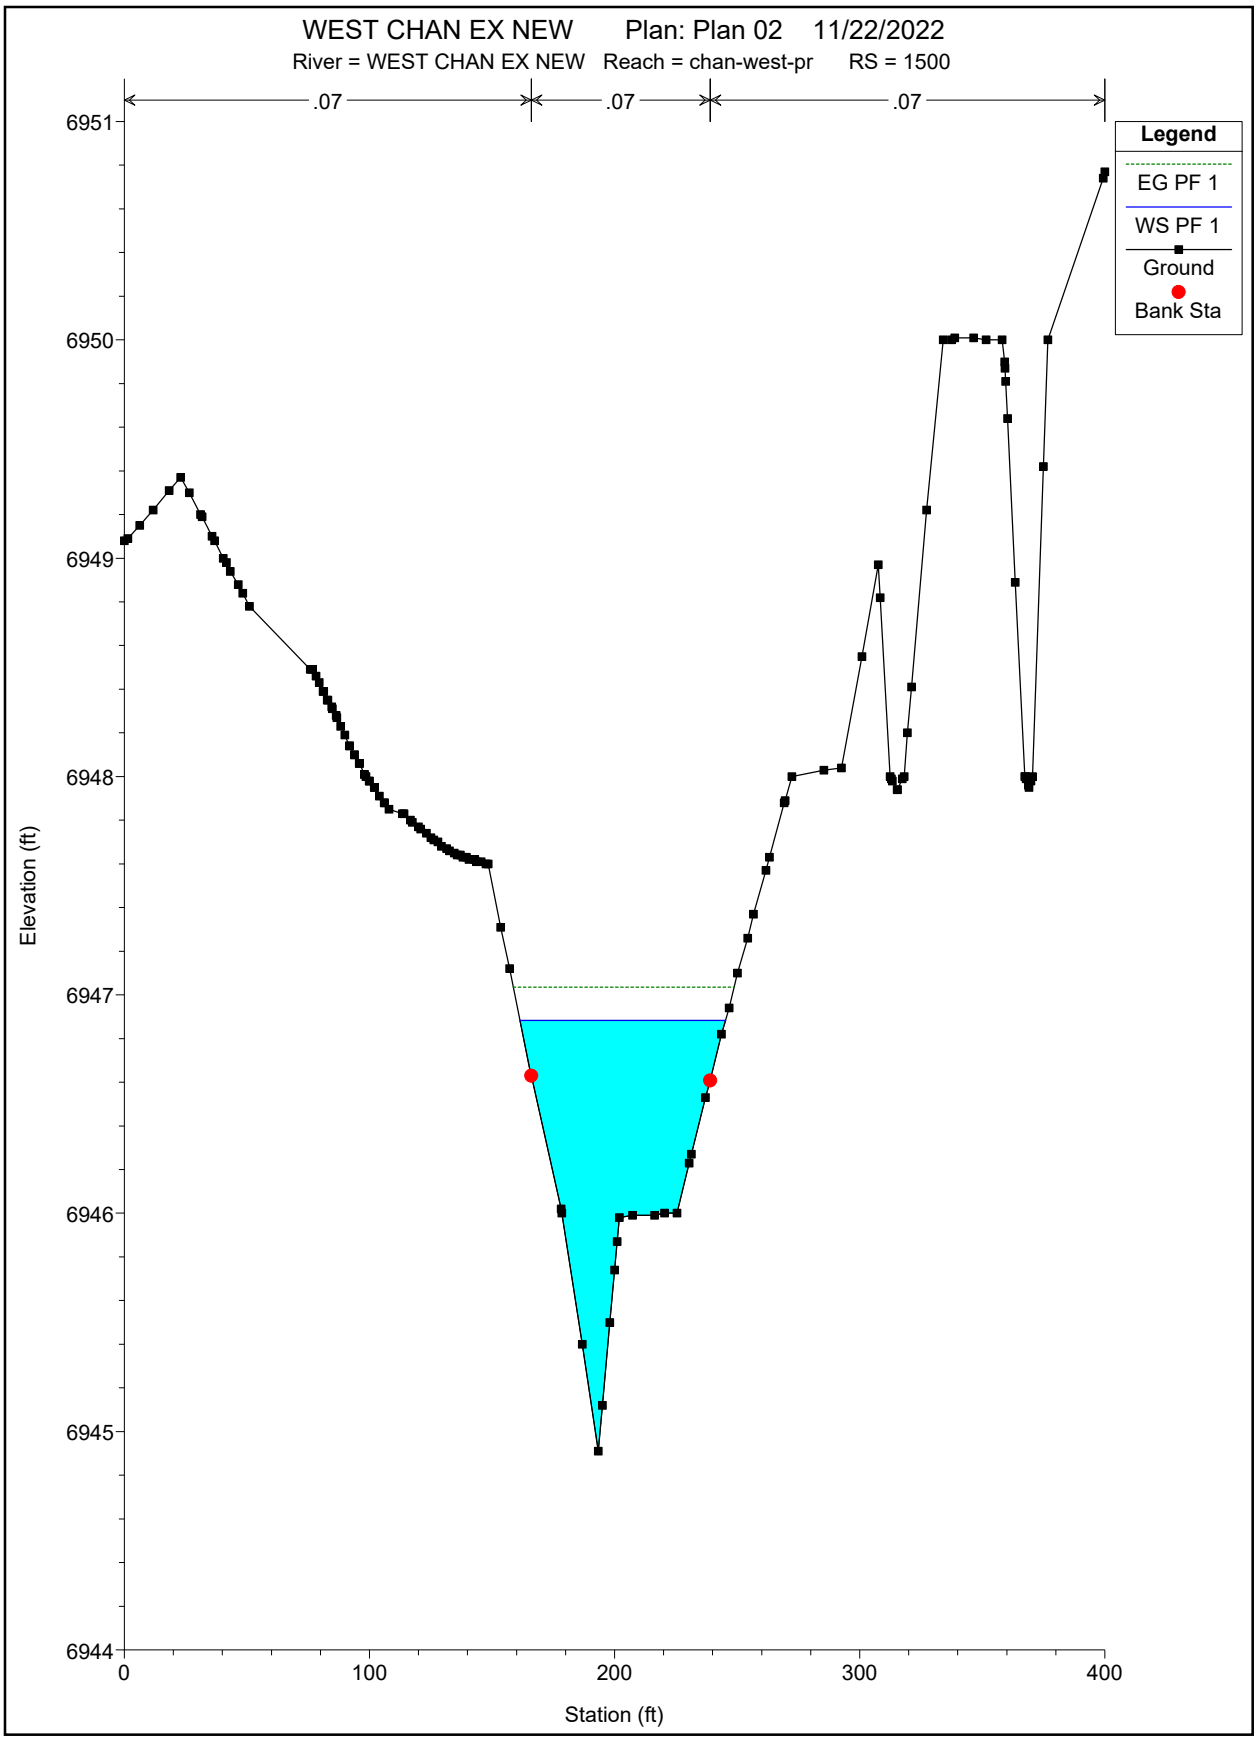
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1500
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6951
6950
6949
6948
6947
6946
6945
6944
Elevation (ft)
0
100
200
300
400
Station (ft)

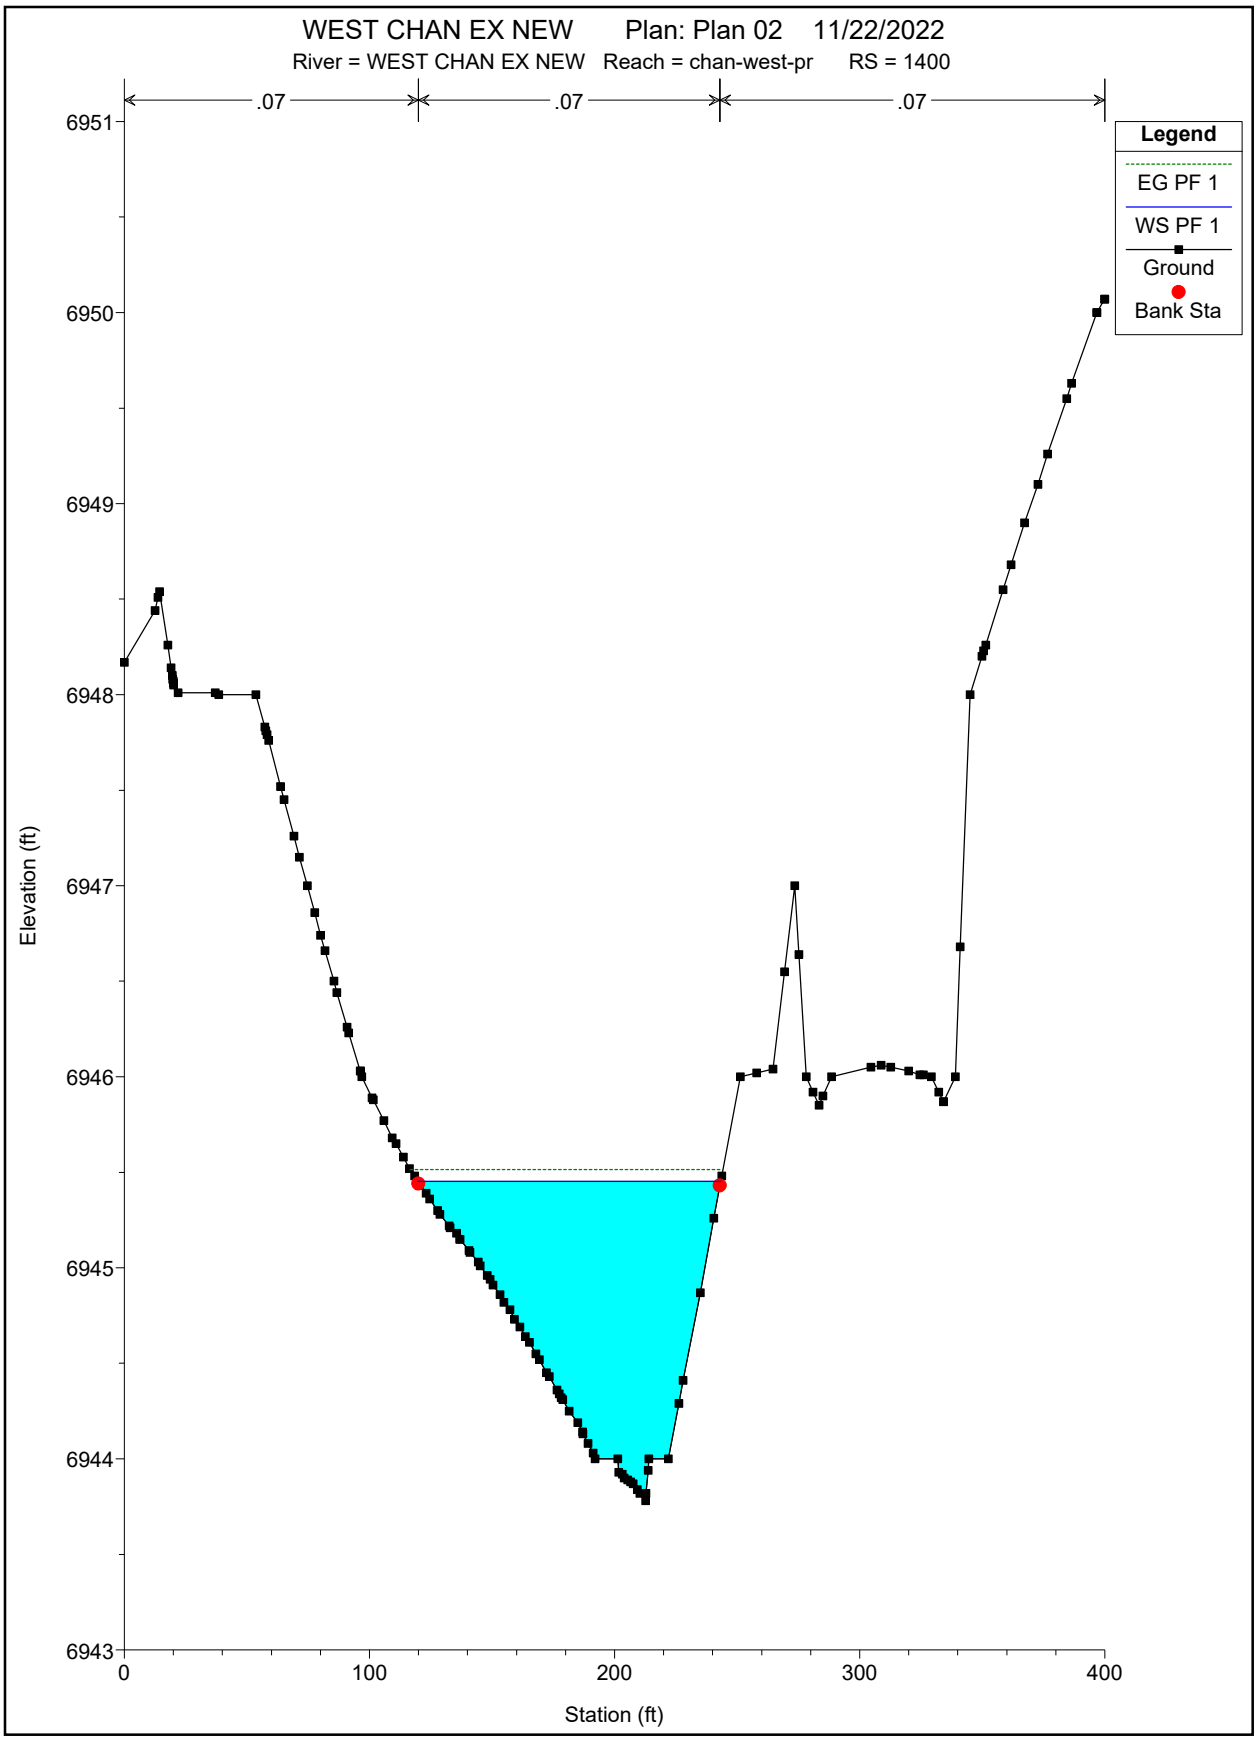
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1400
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6951
6950
6949
6948
6947
6946
6945
6944
6943
0
100
200
300
400
Station (ft)

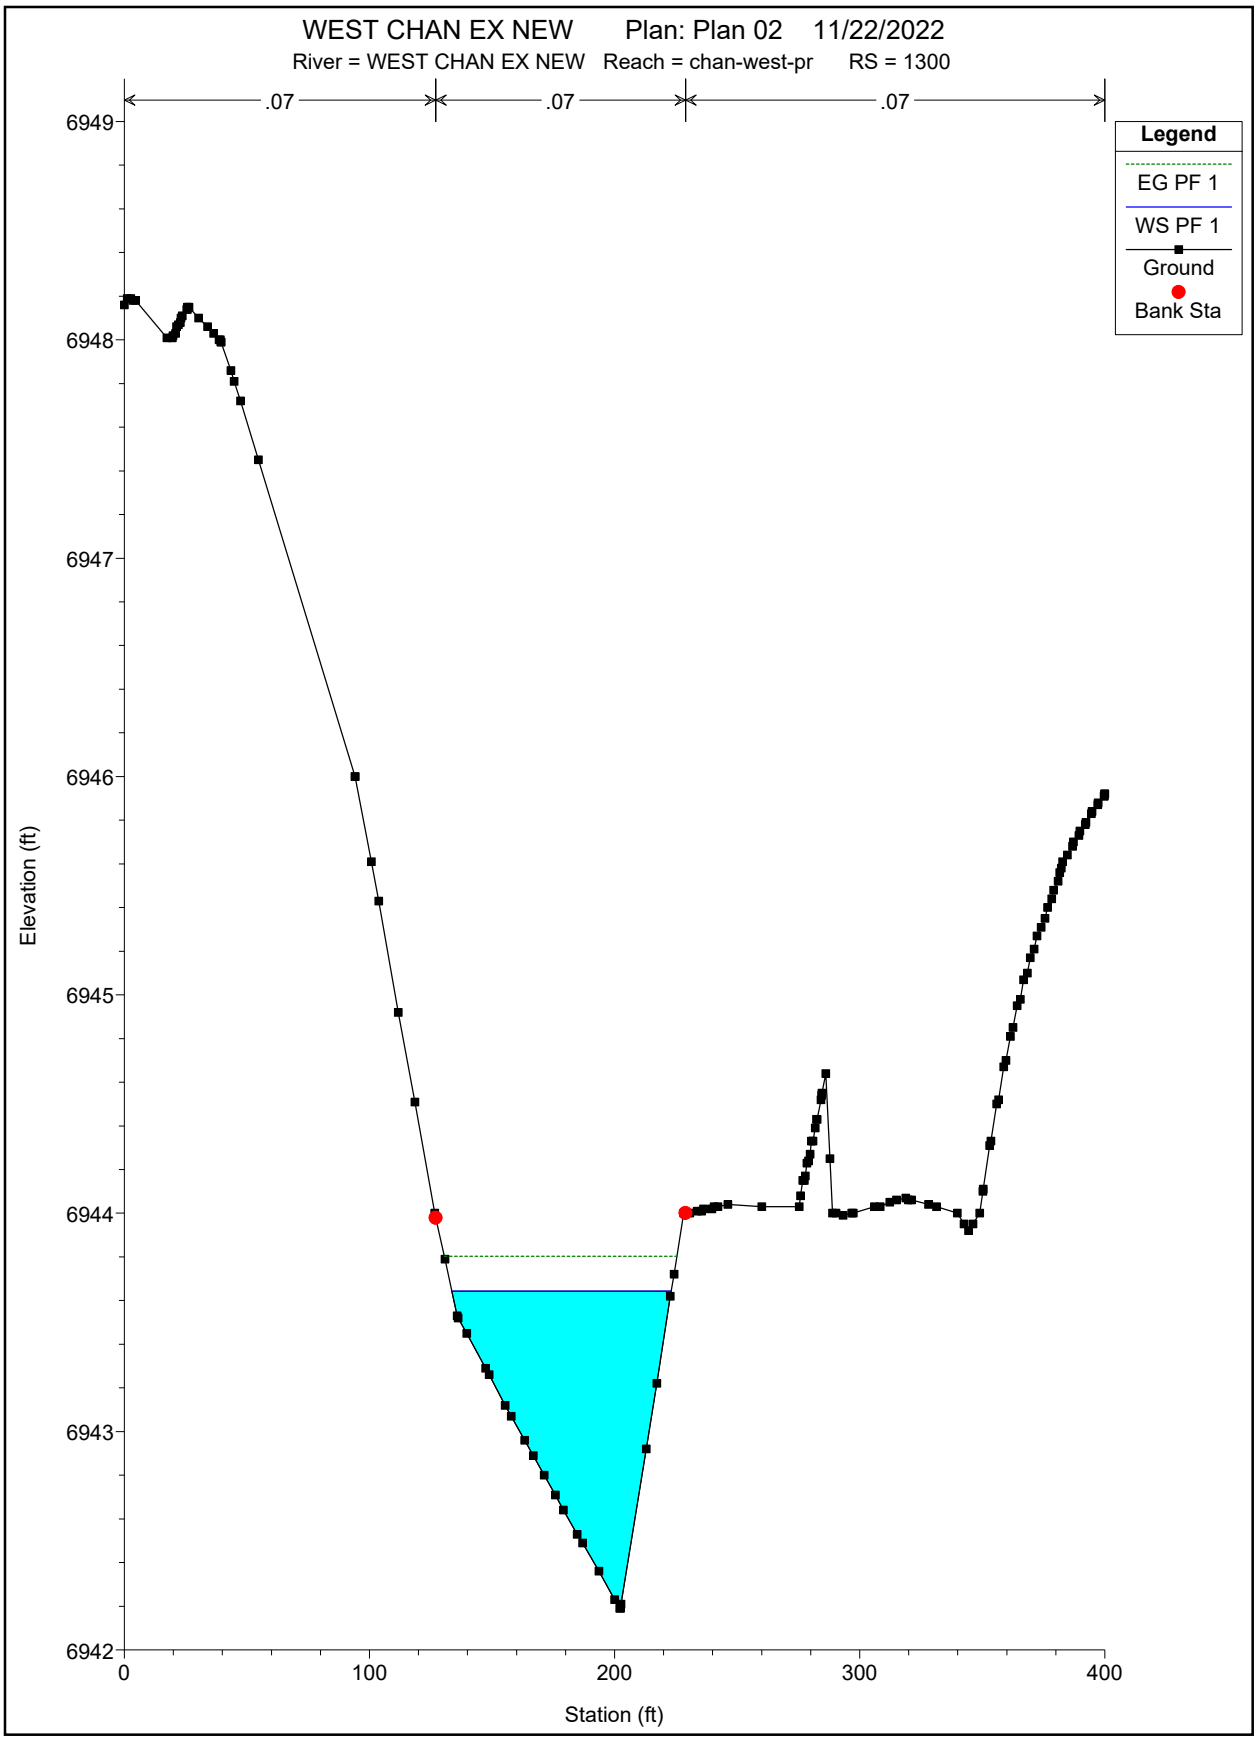
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1300
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6949
6948
6947
6946
6945
6944
6943
6942
0
100
200
300
400
Station (ft)

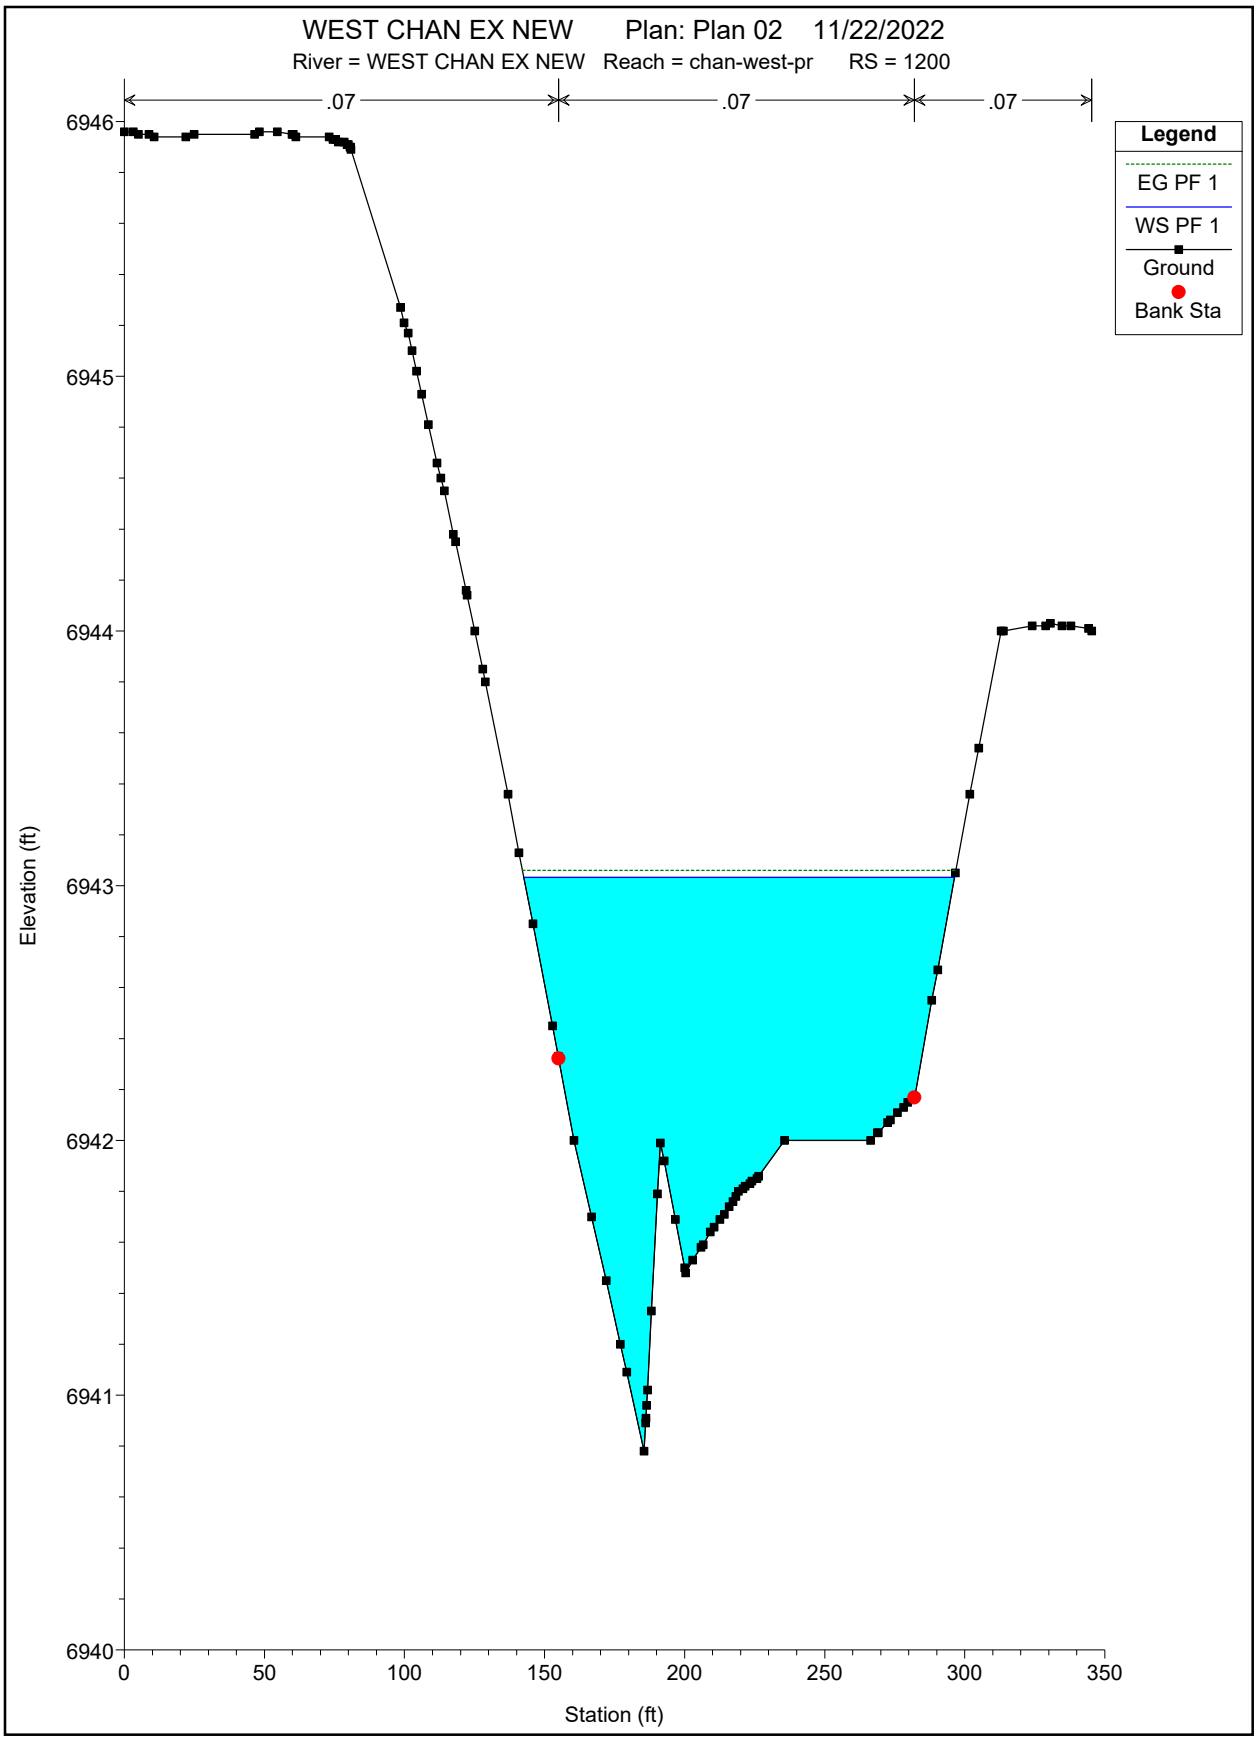
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1200
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6946
6945
6944
6943
6942
6941
6940
0
50
100
150
200
250
300
350
Station (ft)

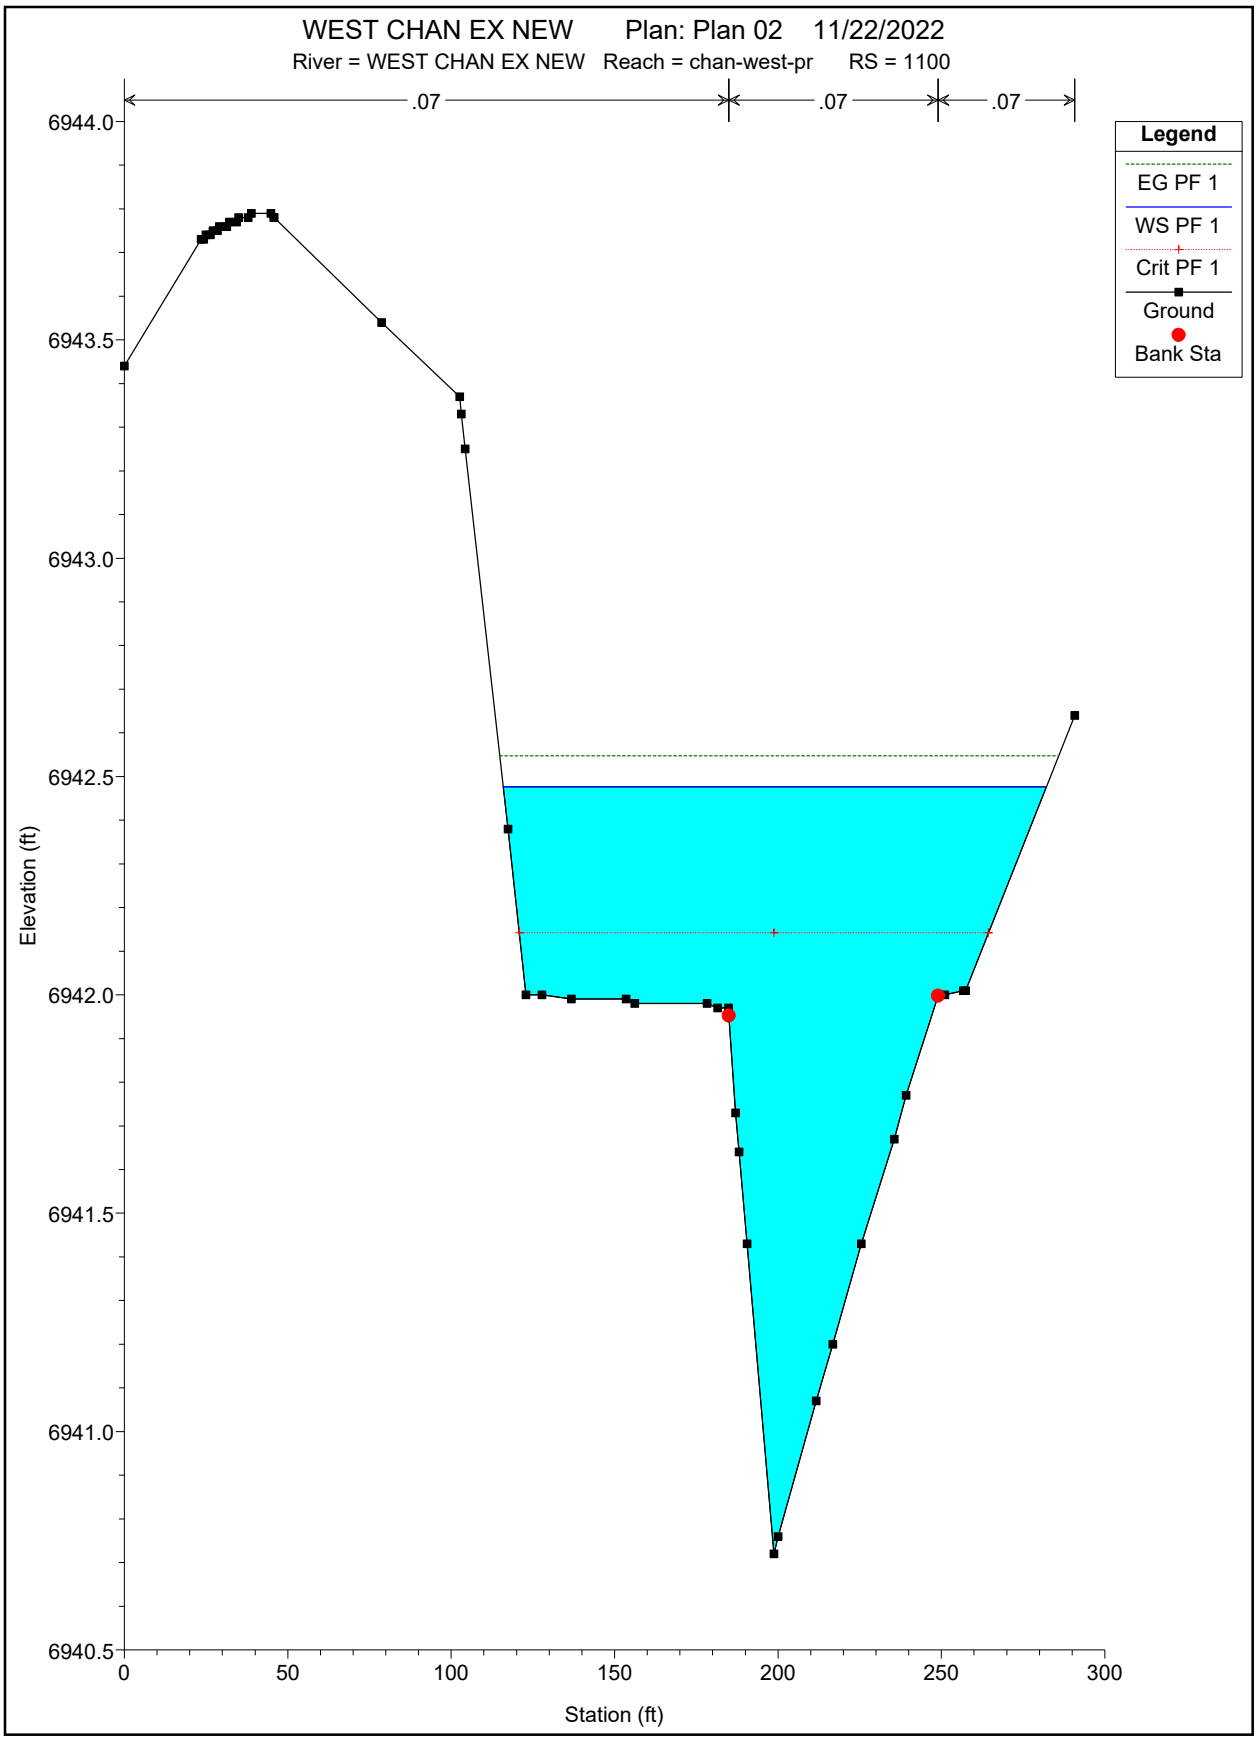
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1100
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6944.0
6943.5
6943.0
6942.5
6942.0
6941.5
6941.0
6940.5
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

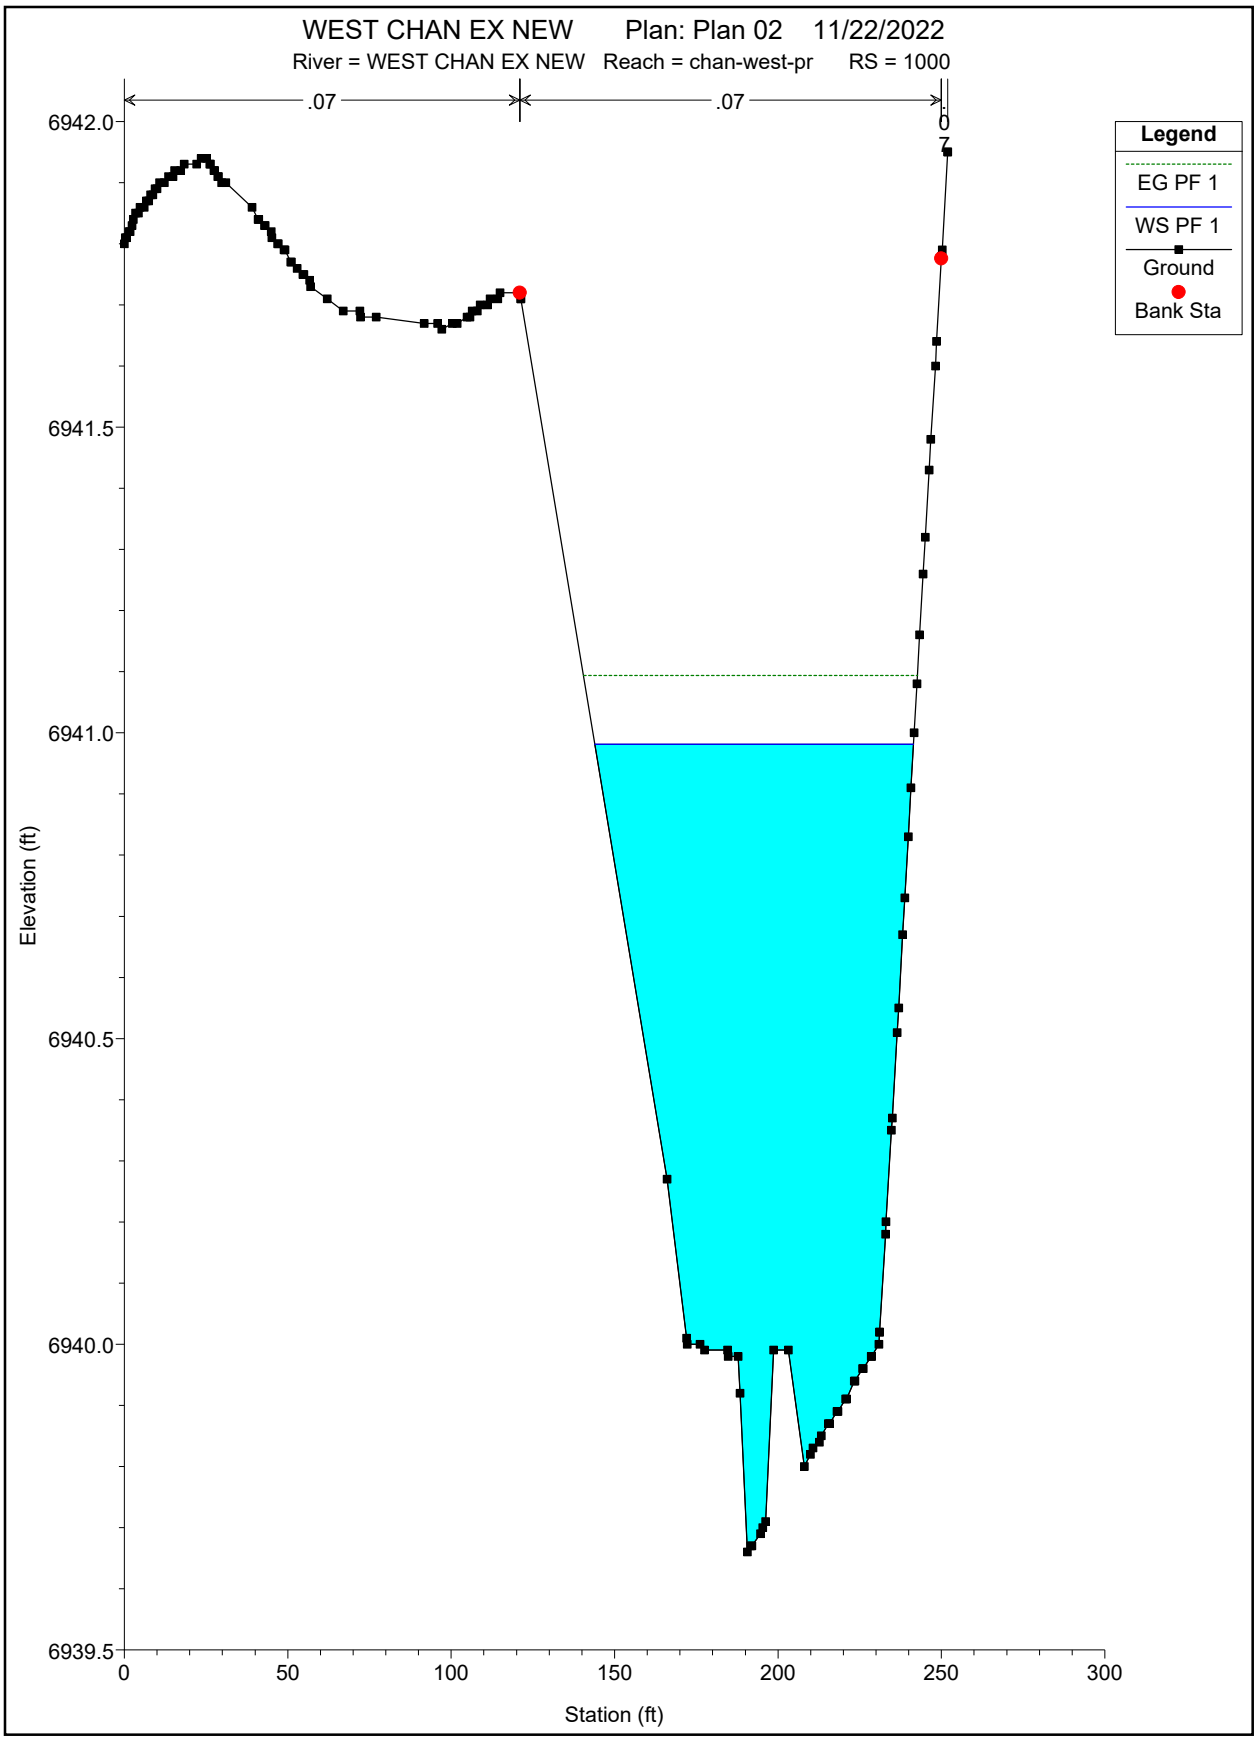
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 1000
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6942.0
6941.5
6941.0
6940.5
6940.0
6939.5
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

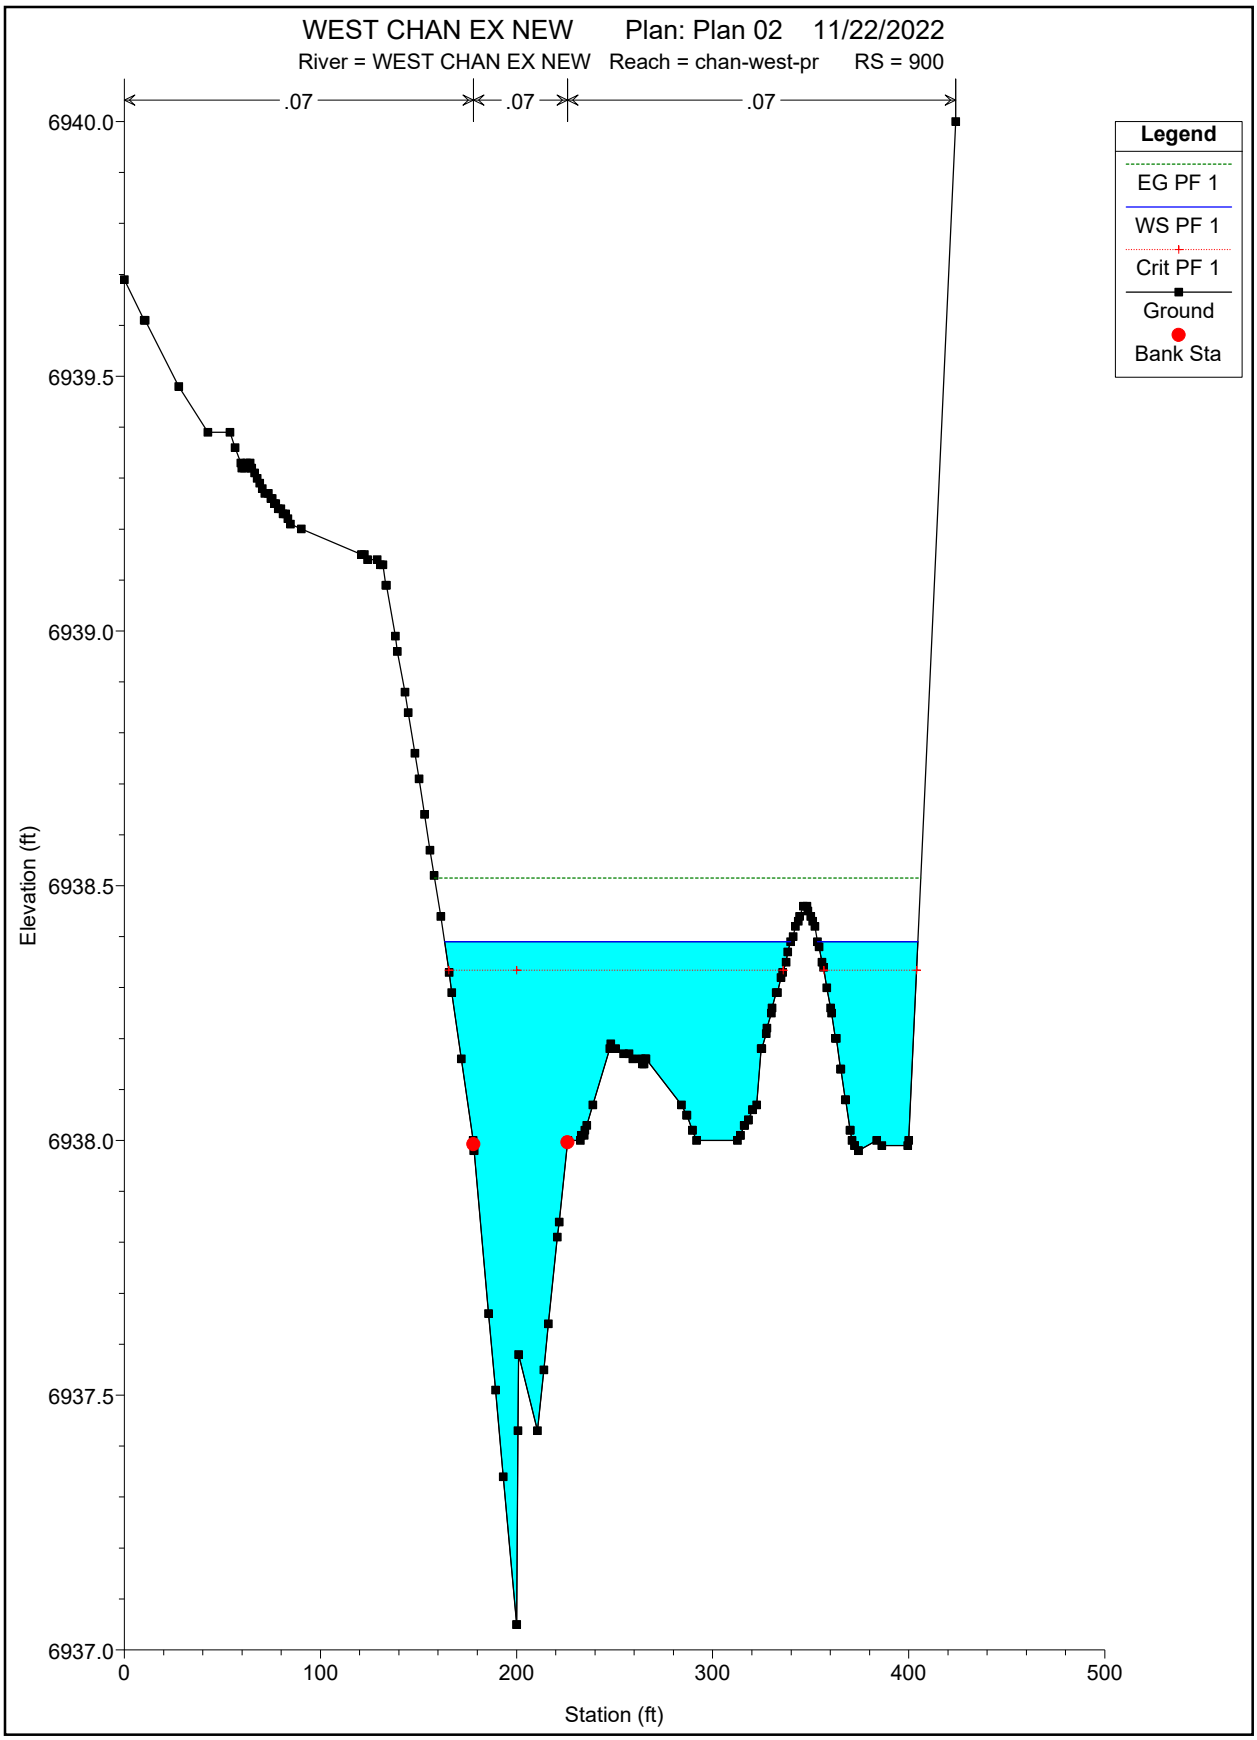
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 900
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6940.0
6939.5
6939.0
6938.5
6938.0
6937.5
6937.0
Elevation (ft)
0
100
200
300
400
500
Station (ft)

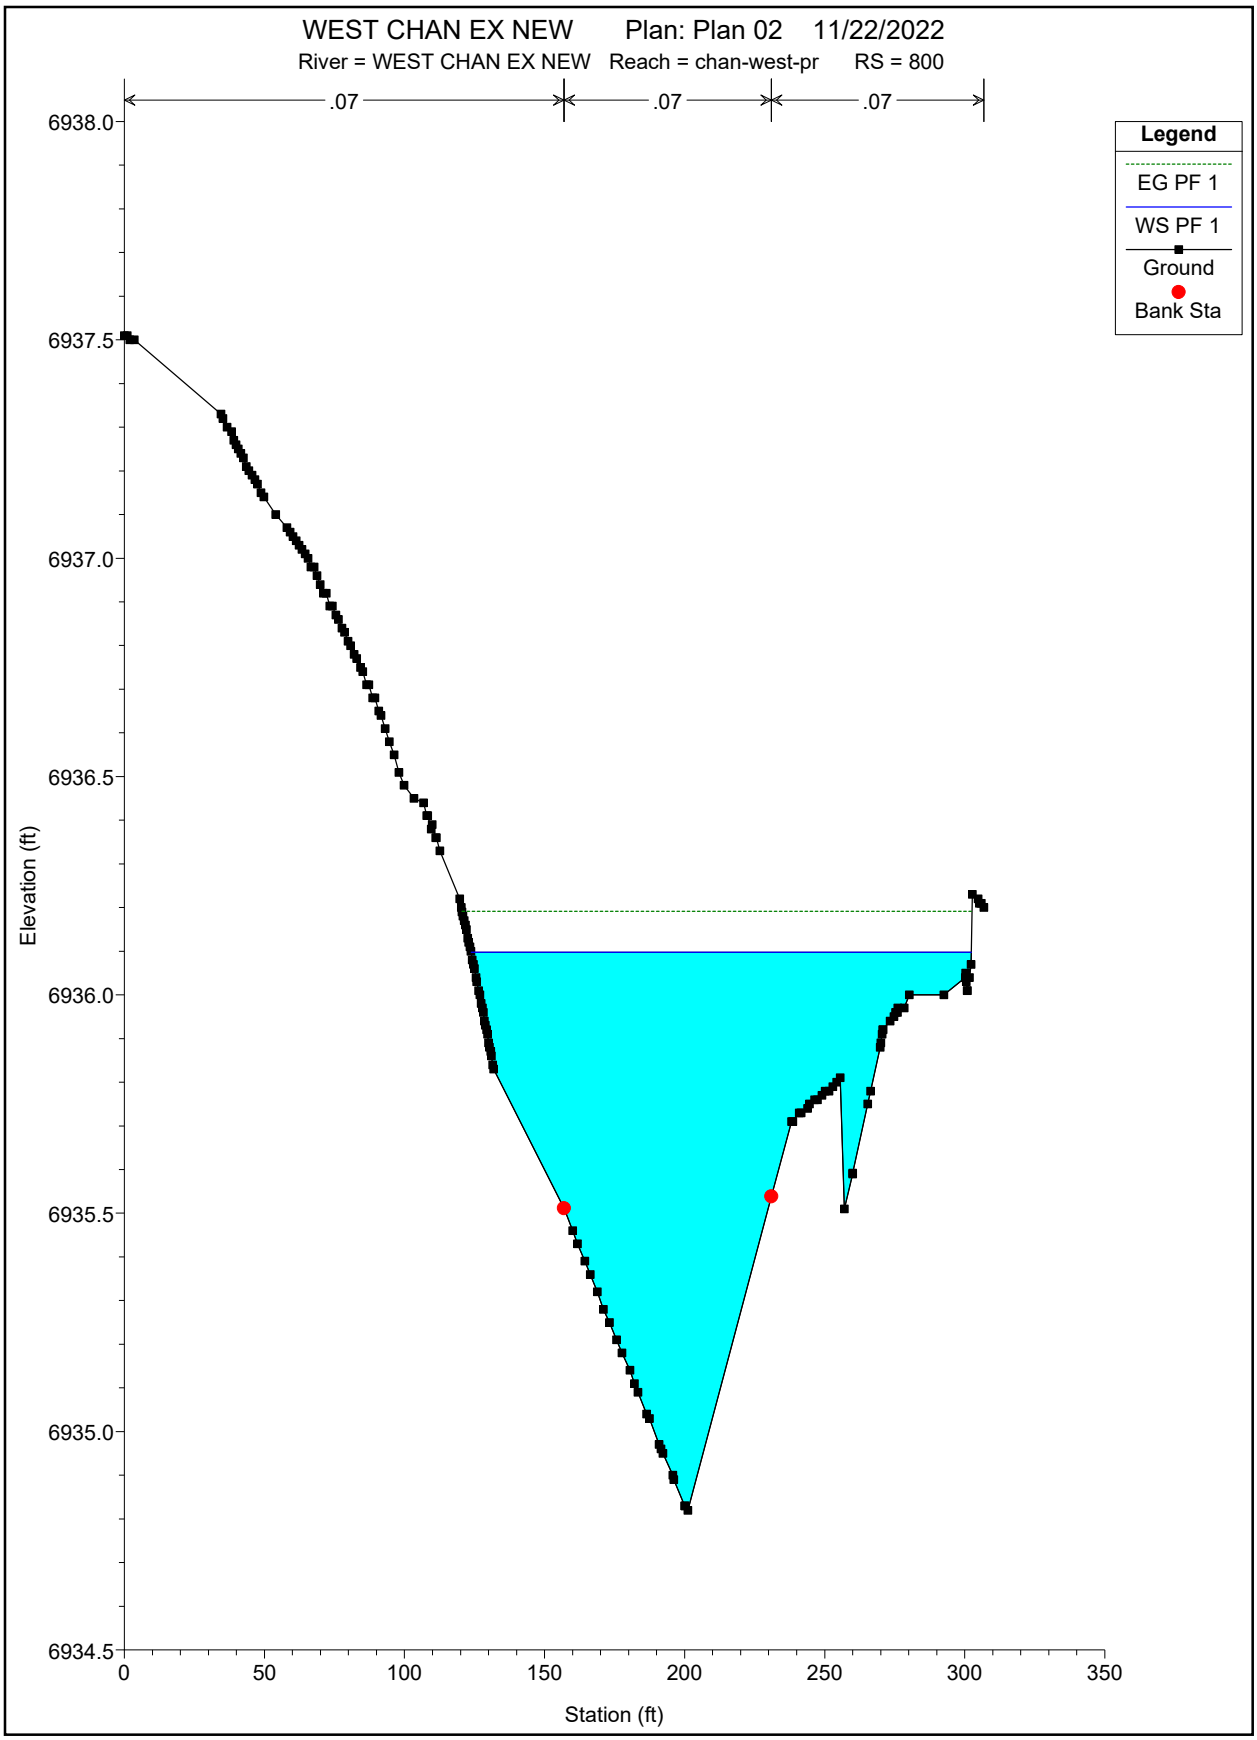
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 800
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6938.0
6937.5
6937.0
6936.5
6936.0
6935.5
6935.0
6934.5
Elevation (ft)
0
50
100
150
200
250
300
350
Station (ft)

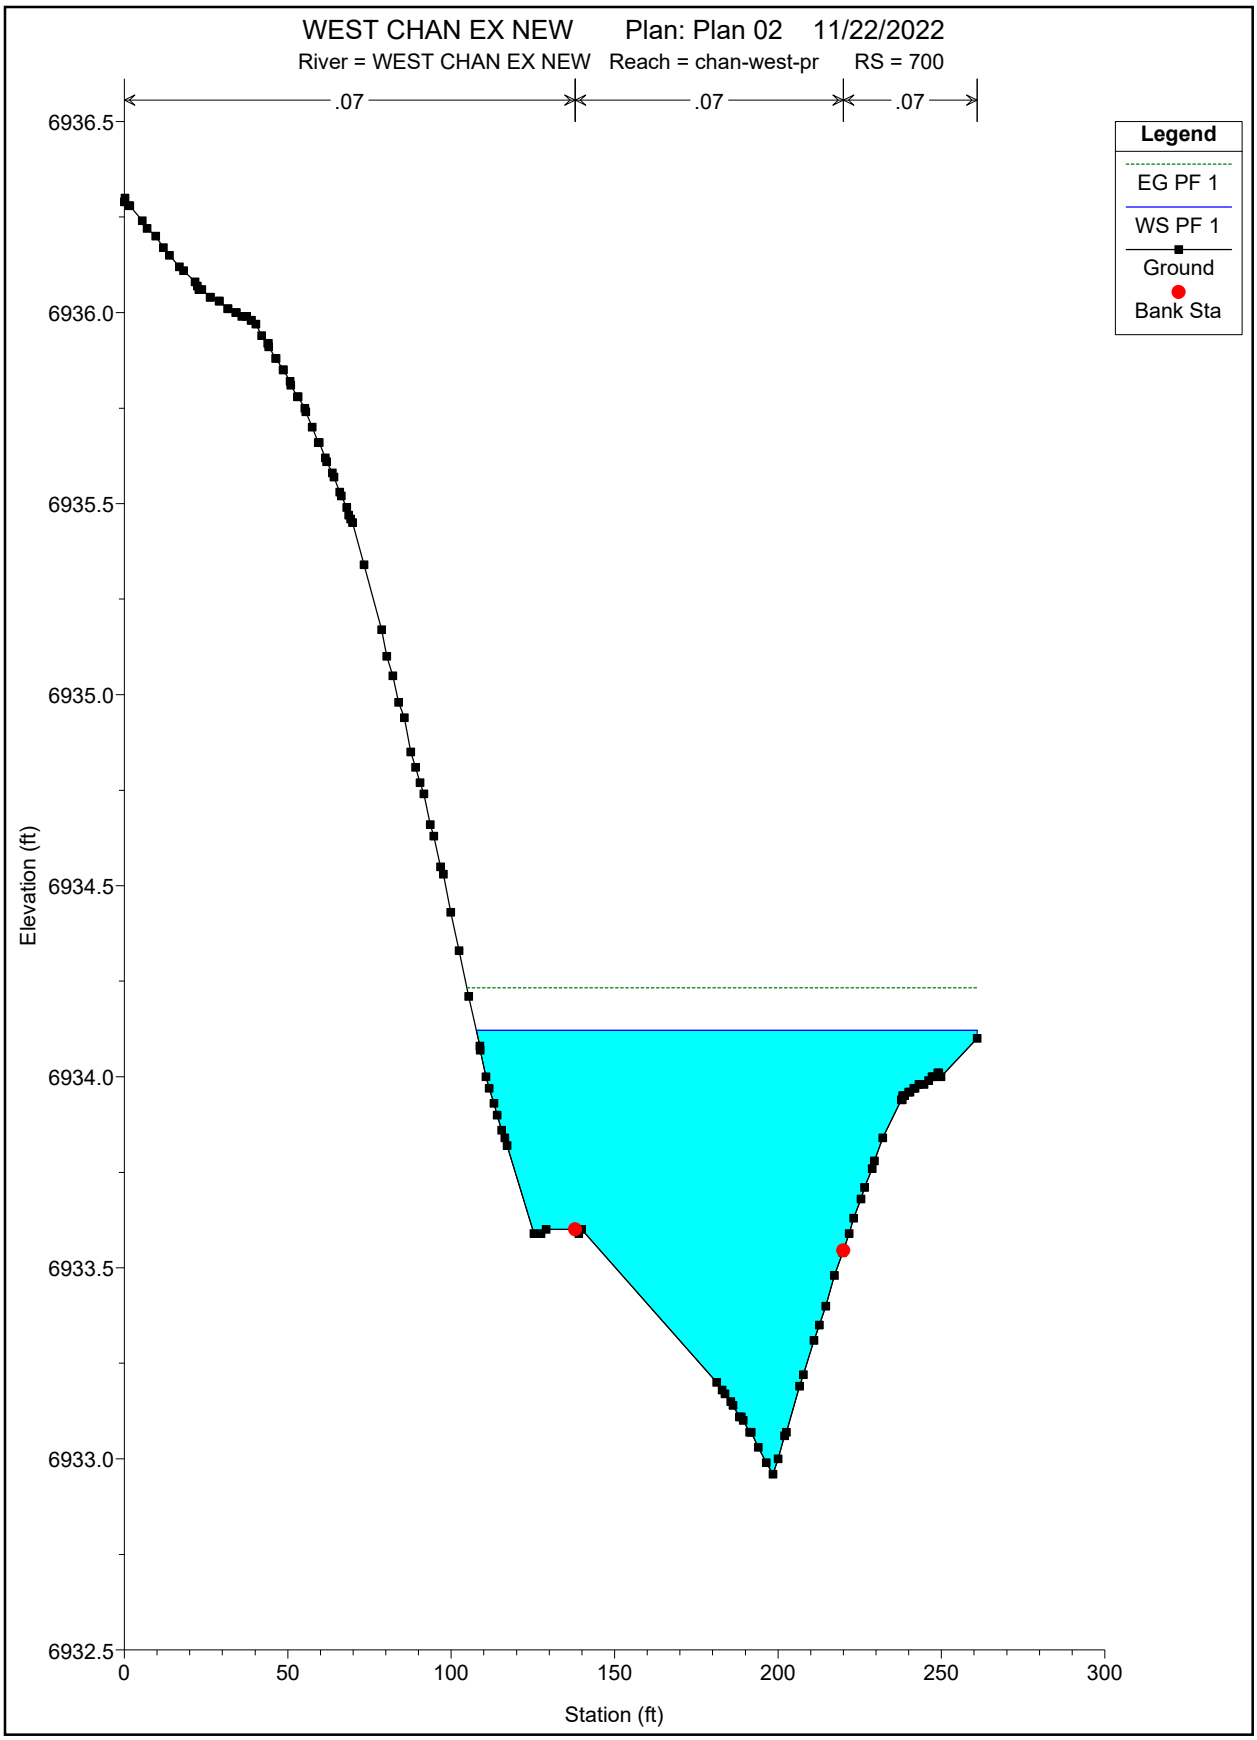
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 700
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6936.5
6936.0
6935.5
6935.0
6934.5
6934.0
6933.5
6933.0
6932.5
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

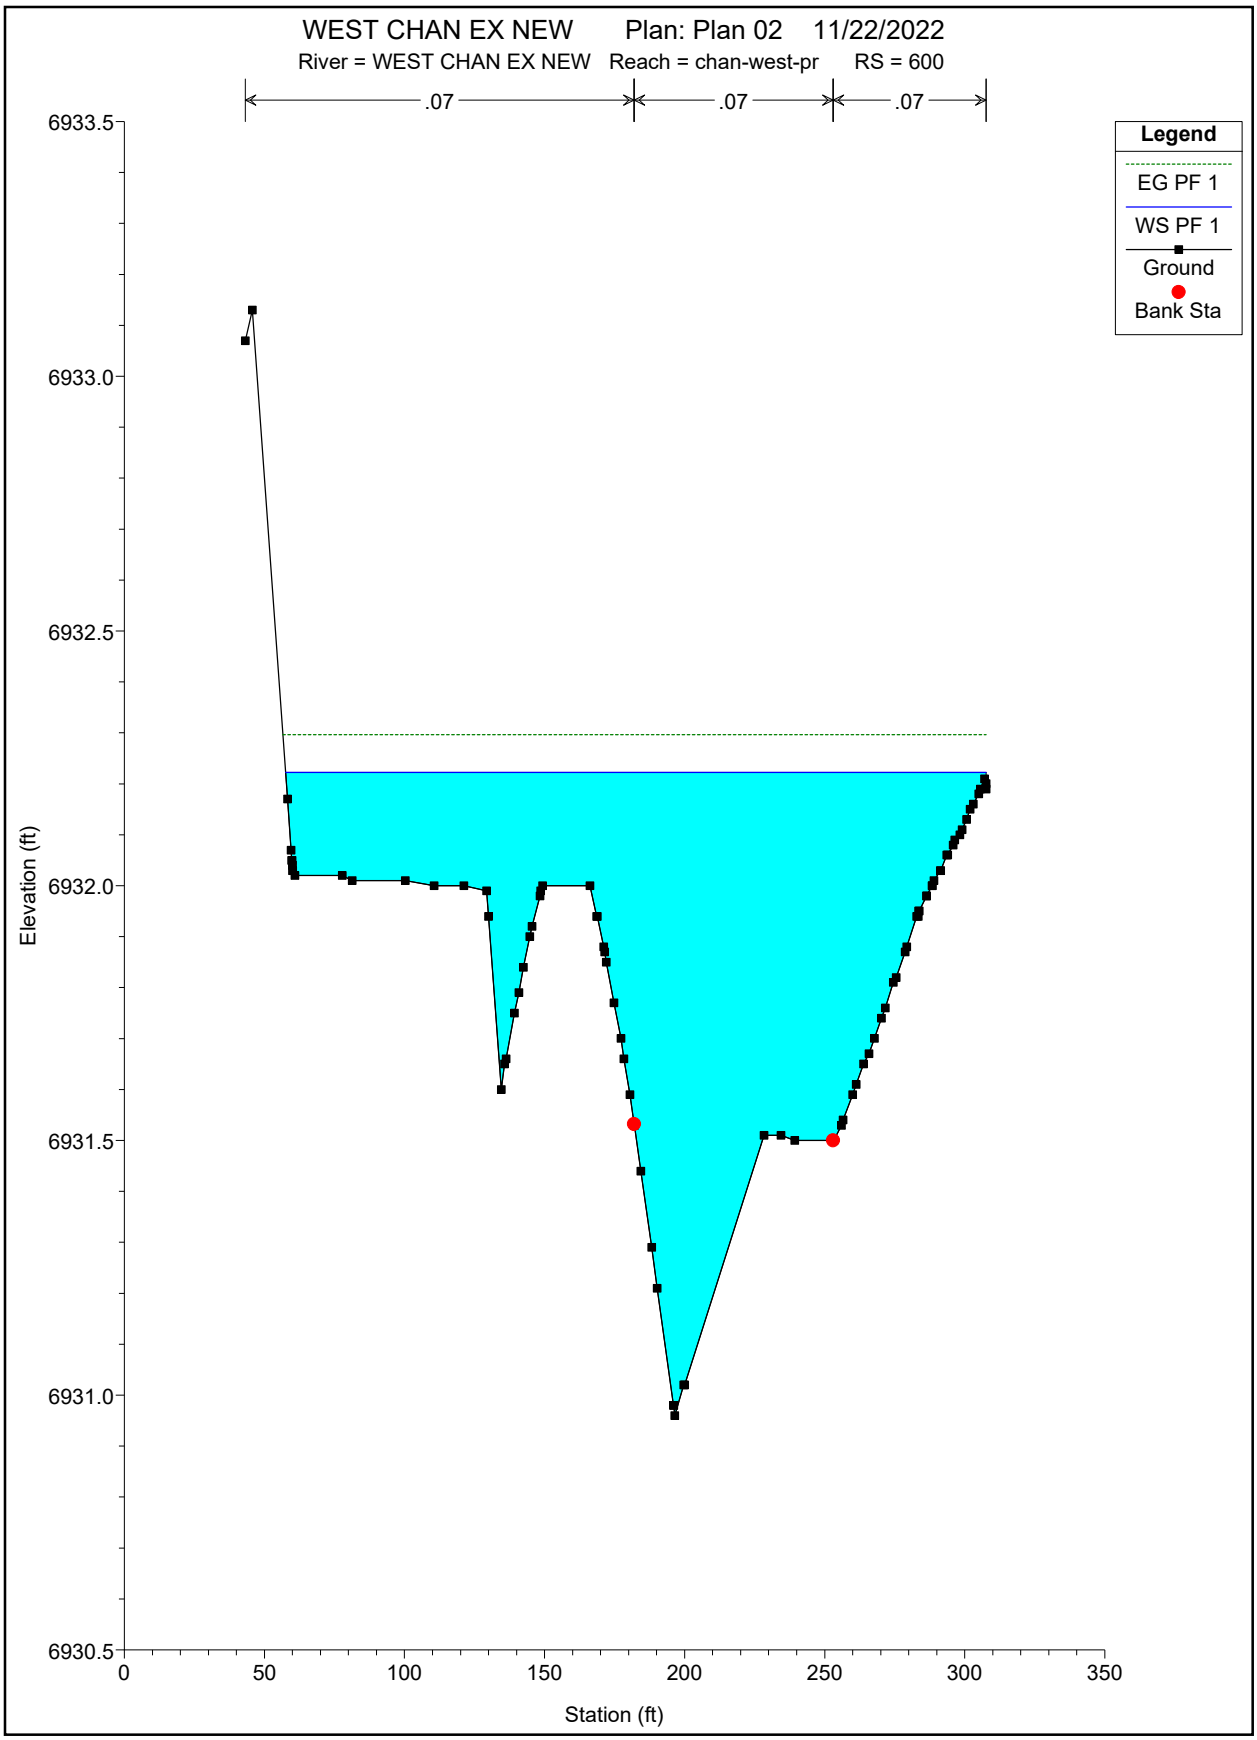
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 600
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6933.5
6933.0
6932.5
6932.0
6931.5
6931.0
6930.5
Elevation (ft)
0
50
100
150
200
250
300
350
Station (ft)

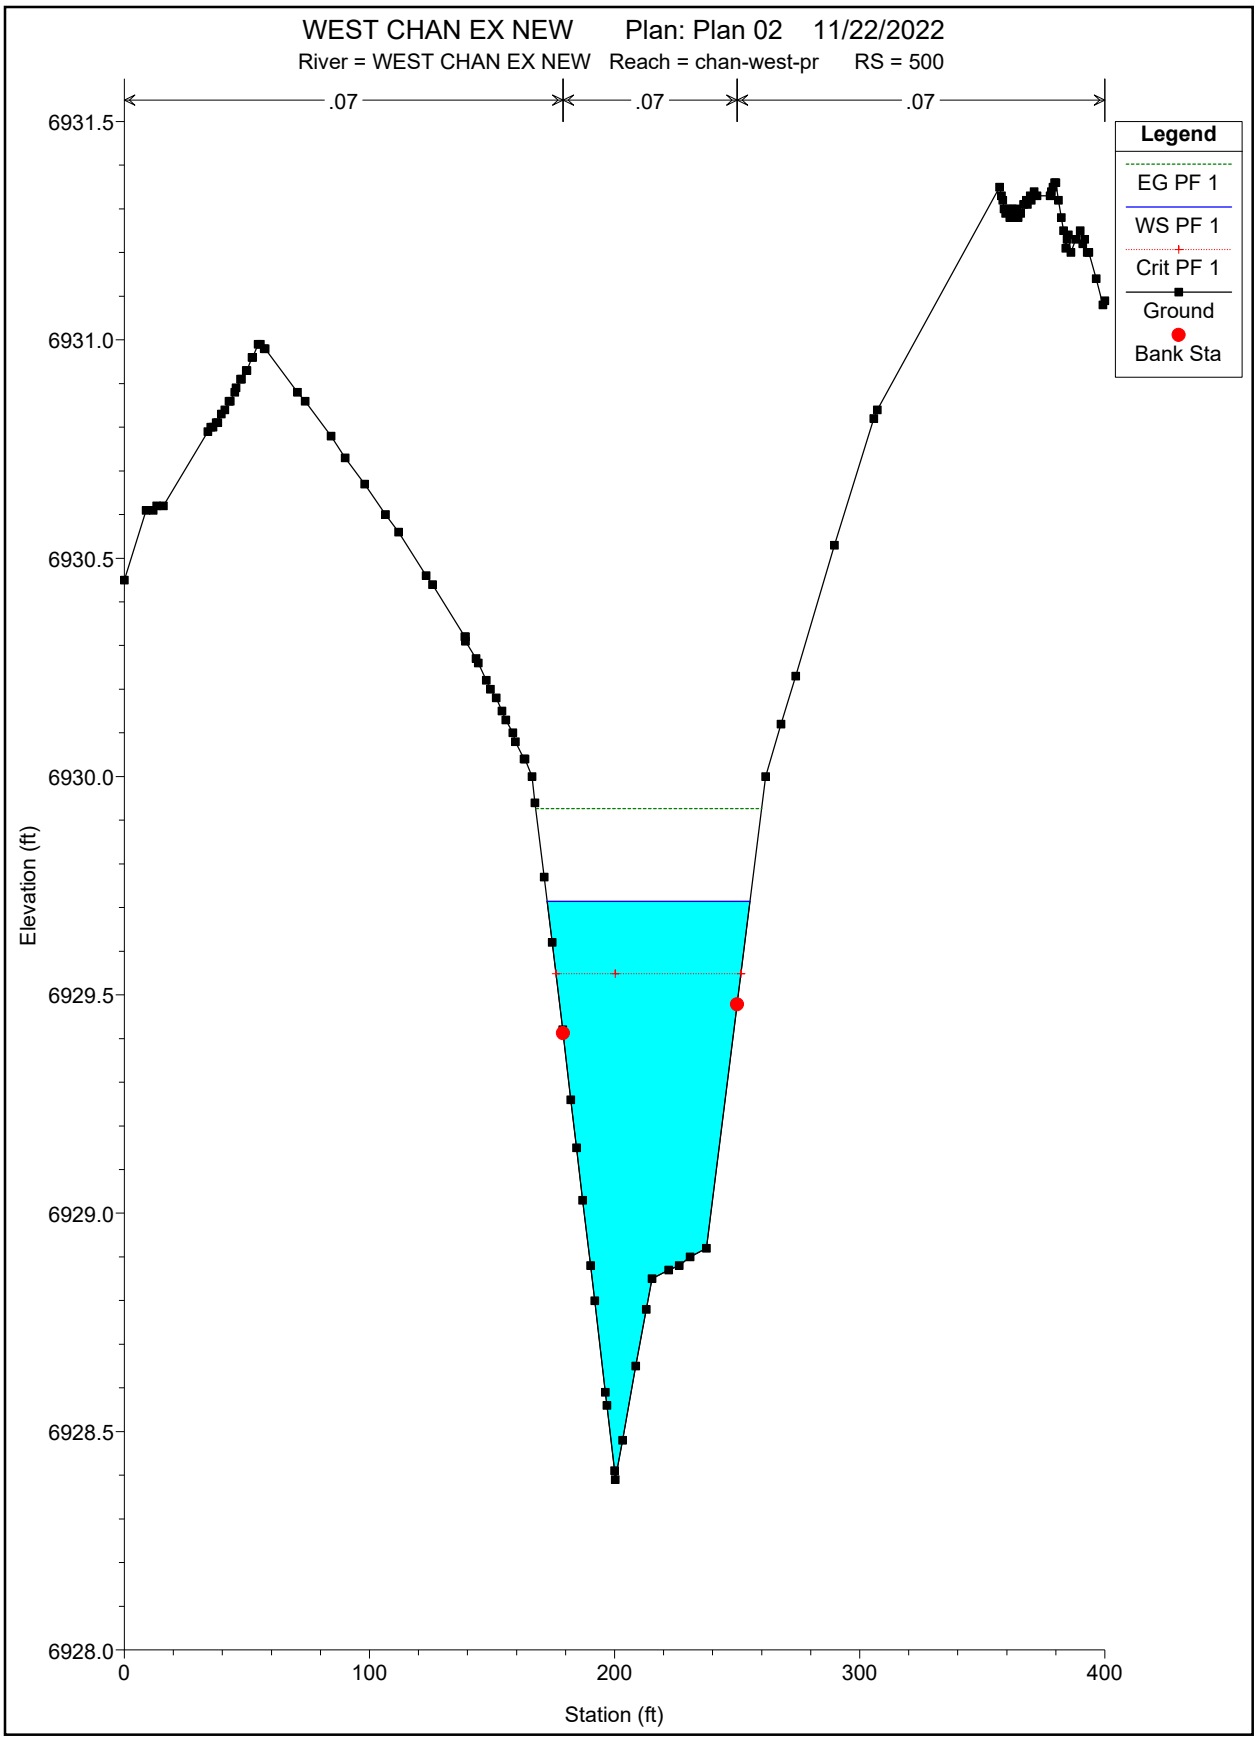
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 500
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6931.5
6931.0
6930.5
6930.0
6929.5
6929.0
6928.5
6928.0
Elevation (ft)
0
100
200
300
400
Station (ft)

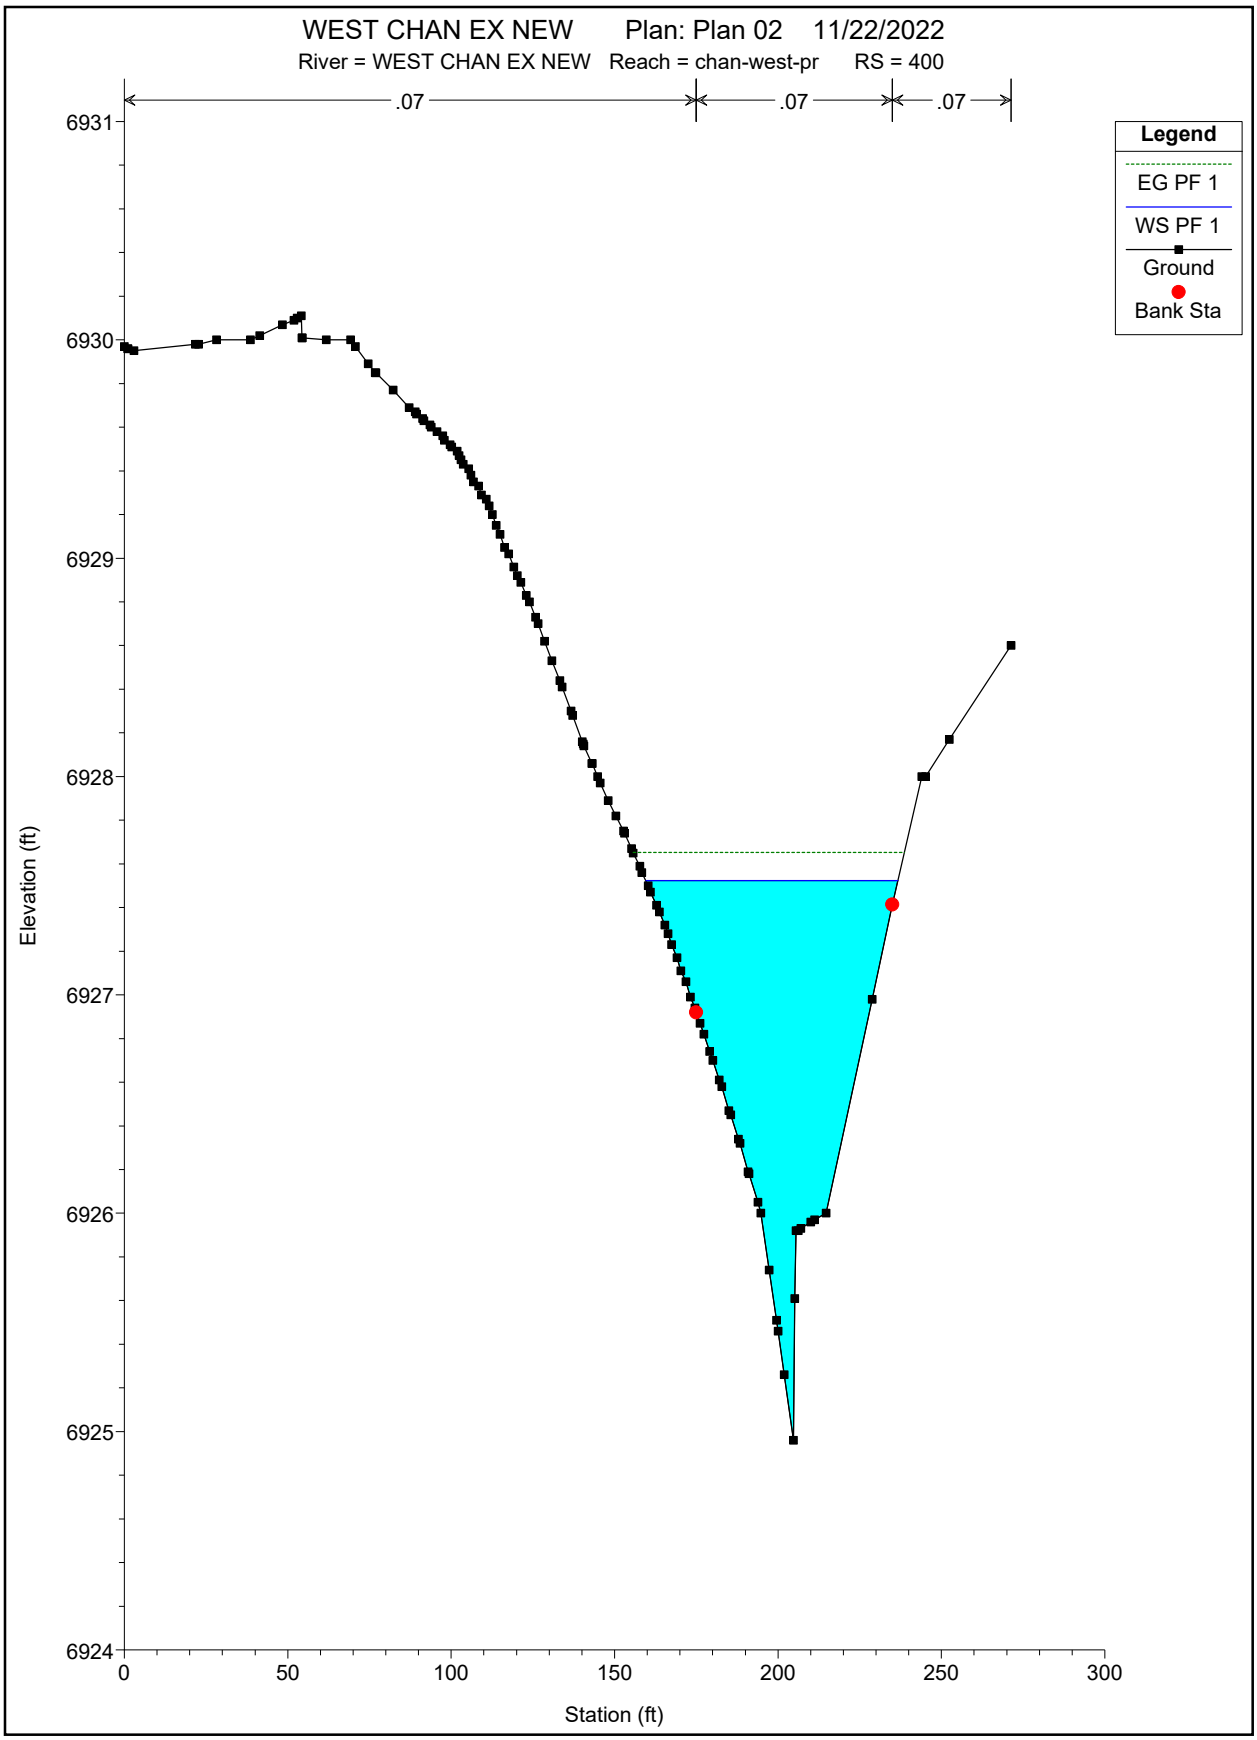
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 400
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6931
6930
6929
6928
6927
6926
6925
6924
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

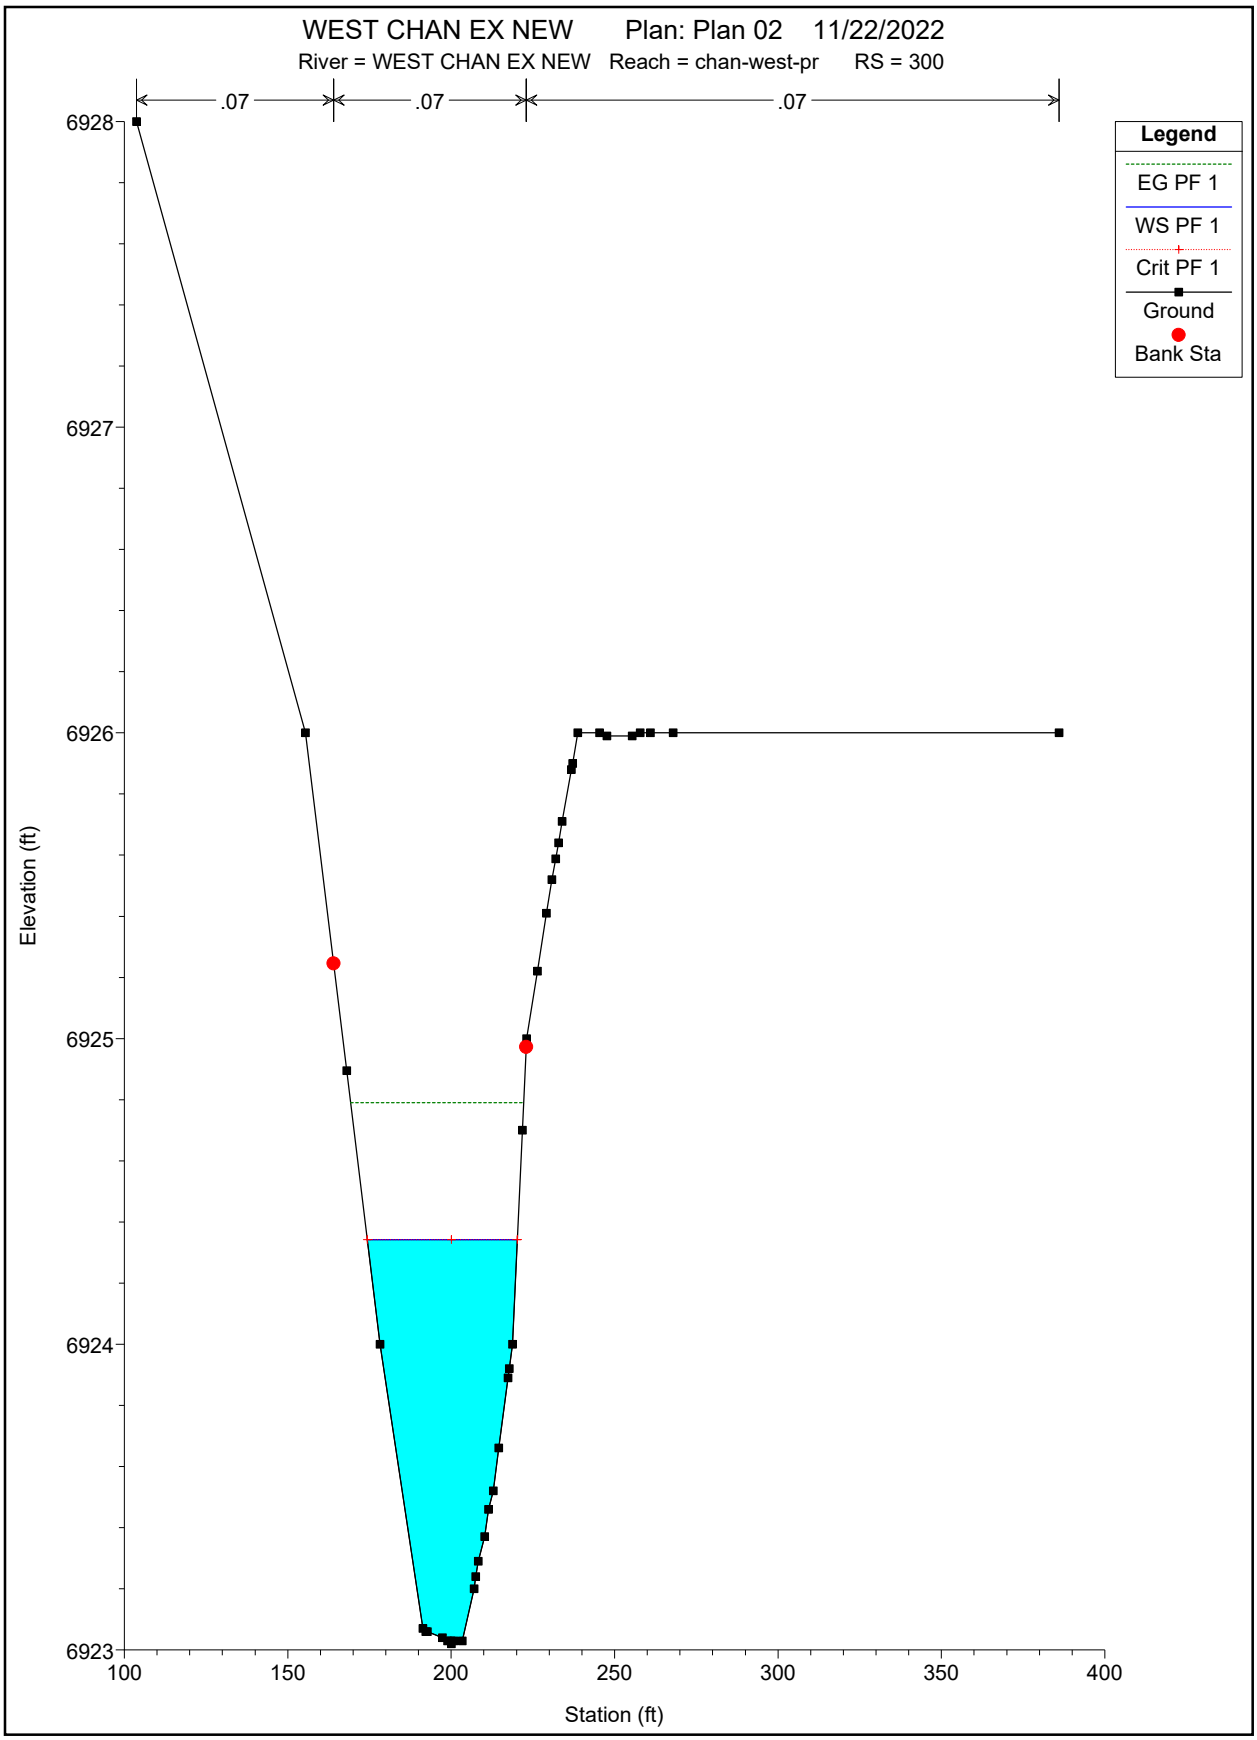
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 300
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6928
6927
6926
6925
6924
6923
Elevation (ft)
100
150
200
250
300
350
400
Station (ft)

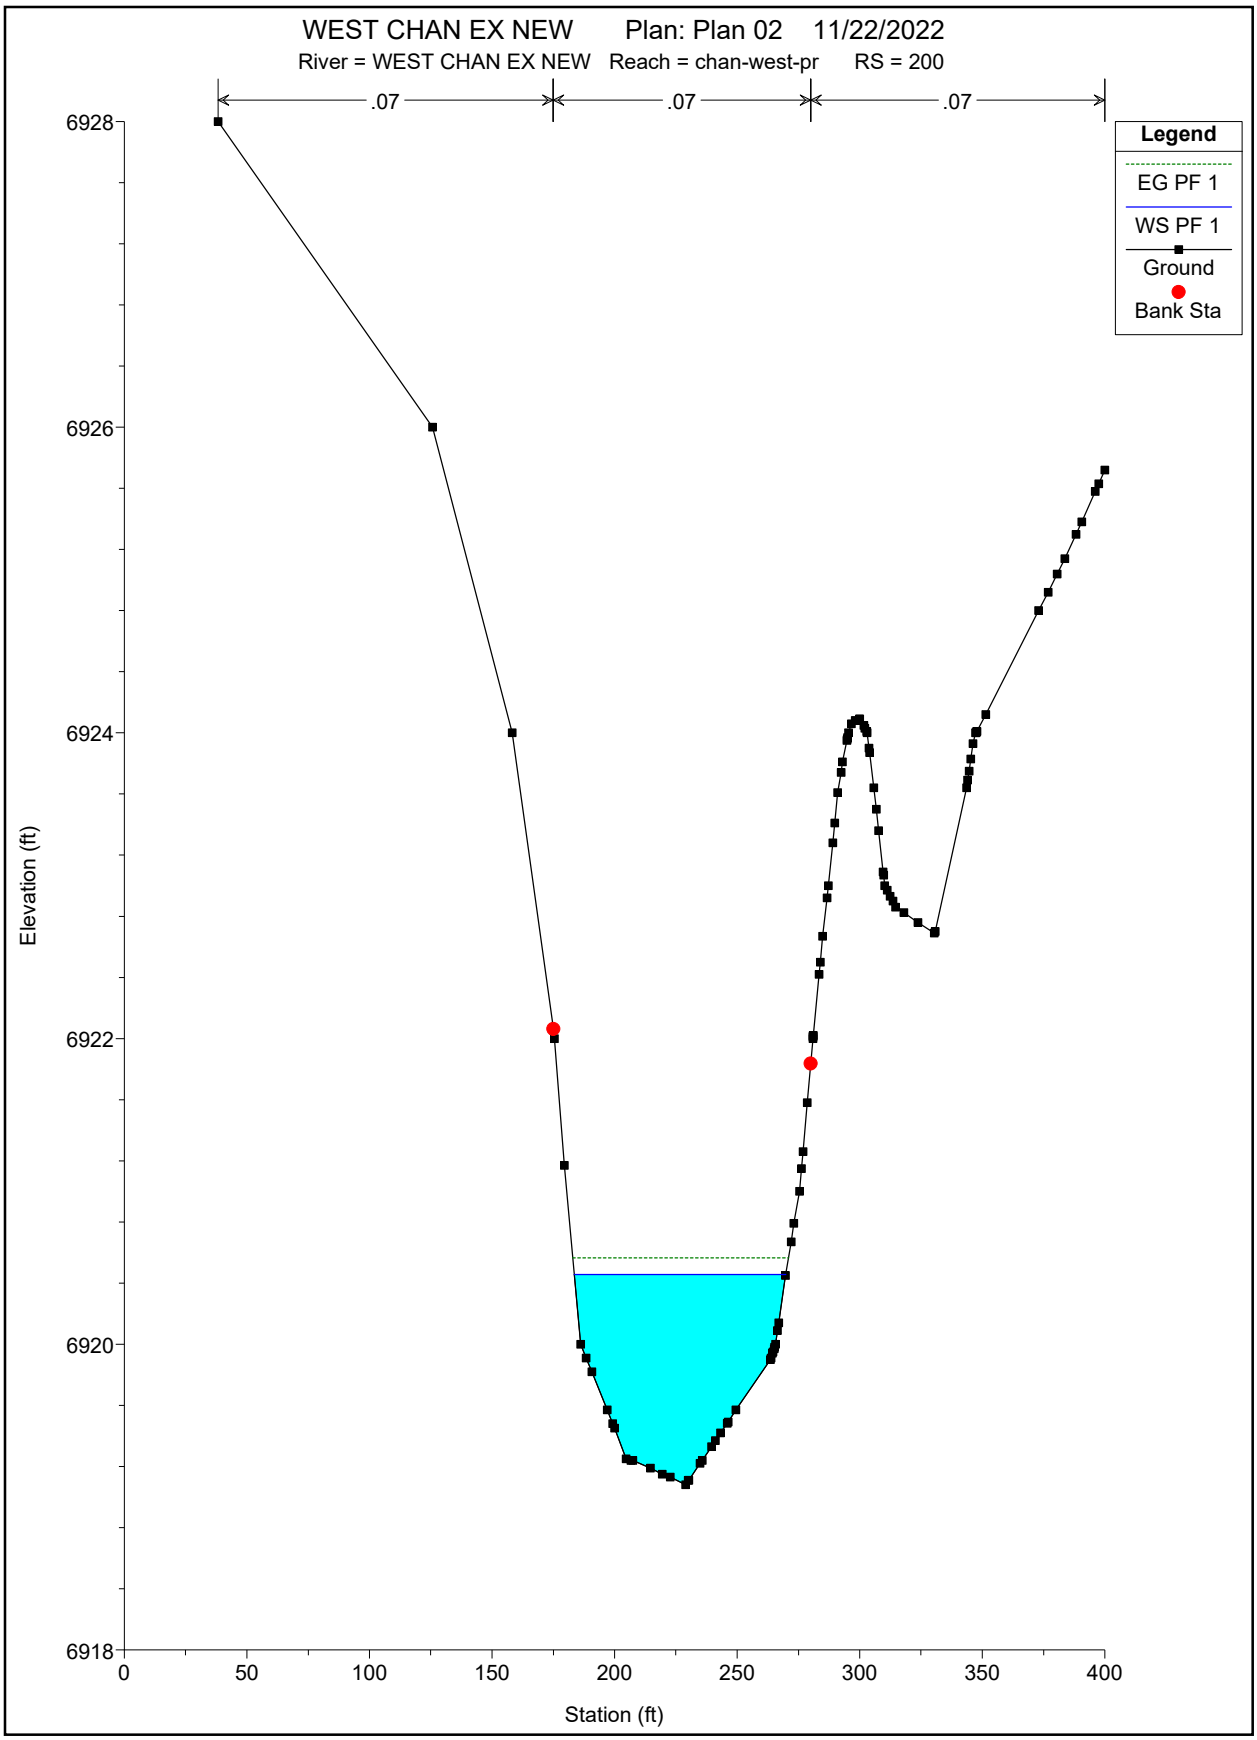
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 200
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6928
6926
6924
6922
6920
6918
Elevation (ft)
0
50
100
150
200
250
300
350
400
Station (ft)

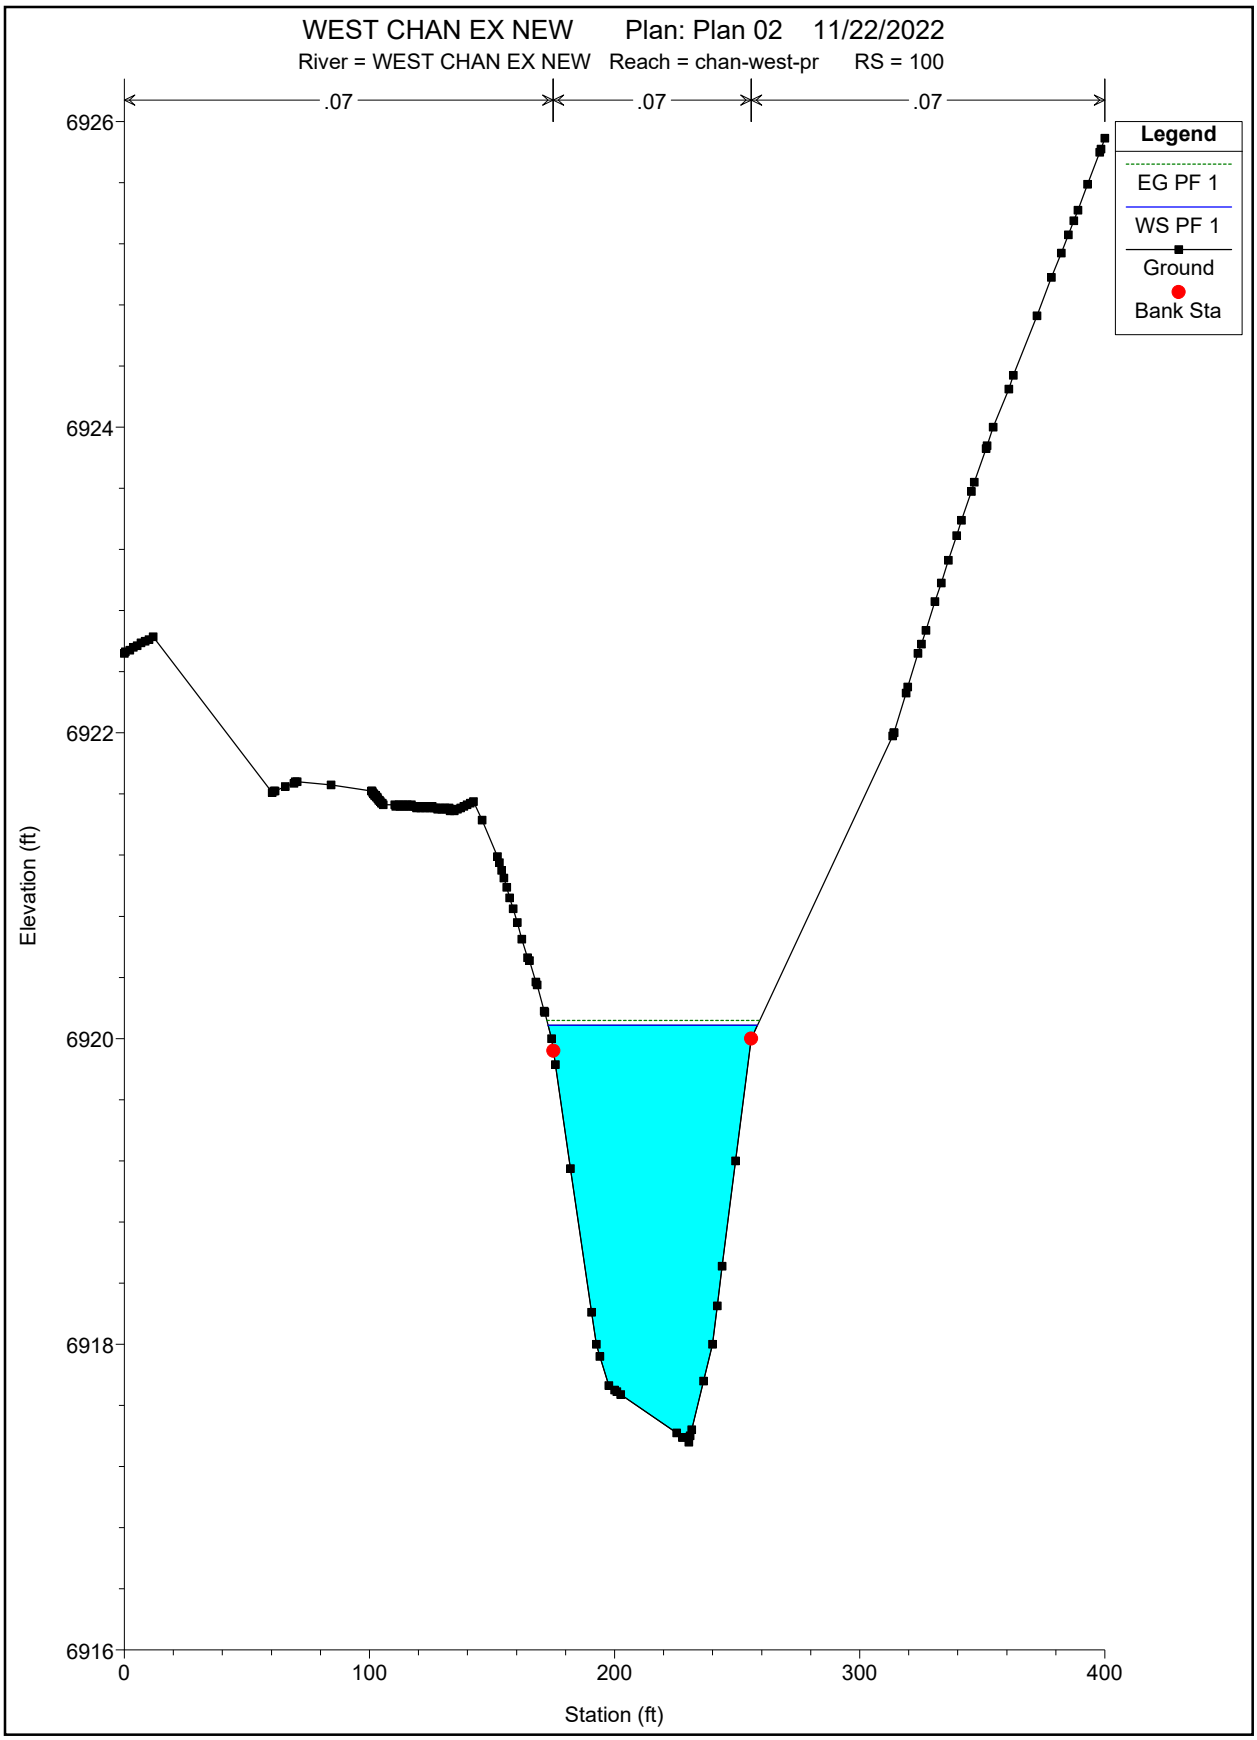
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 100
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6926
6924
6922
6920
6918
6916
Elevation (ft)
0
100
200
300
400
Station (ft)

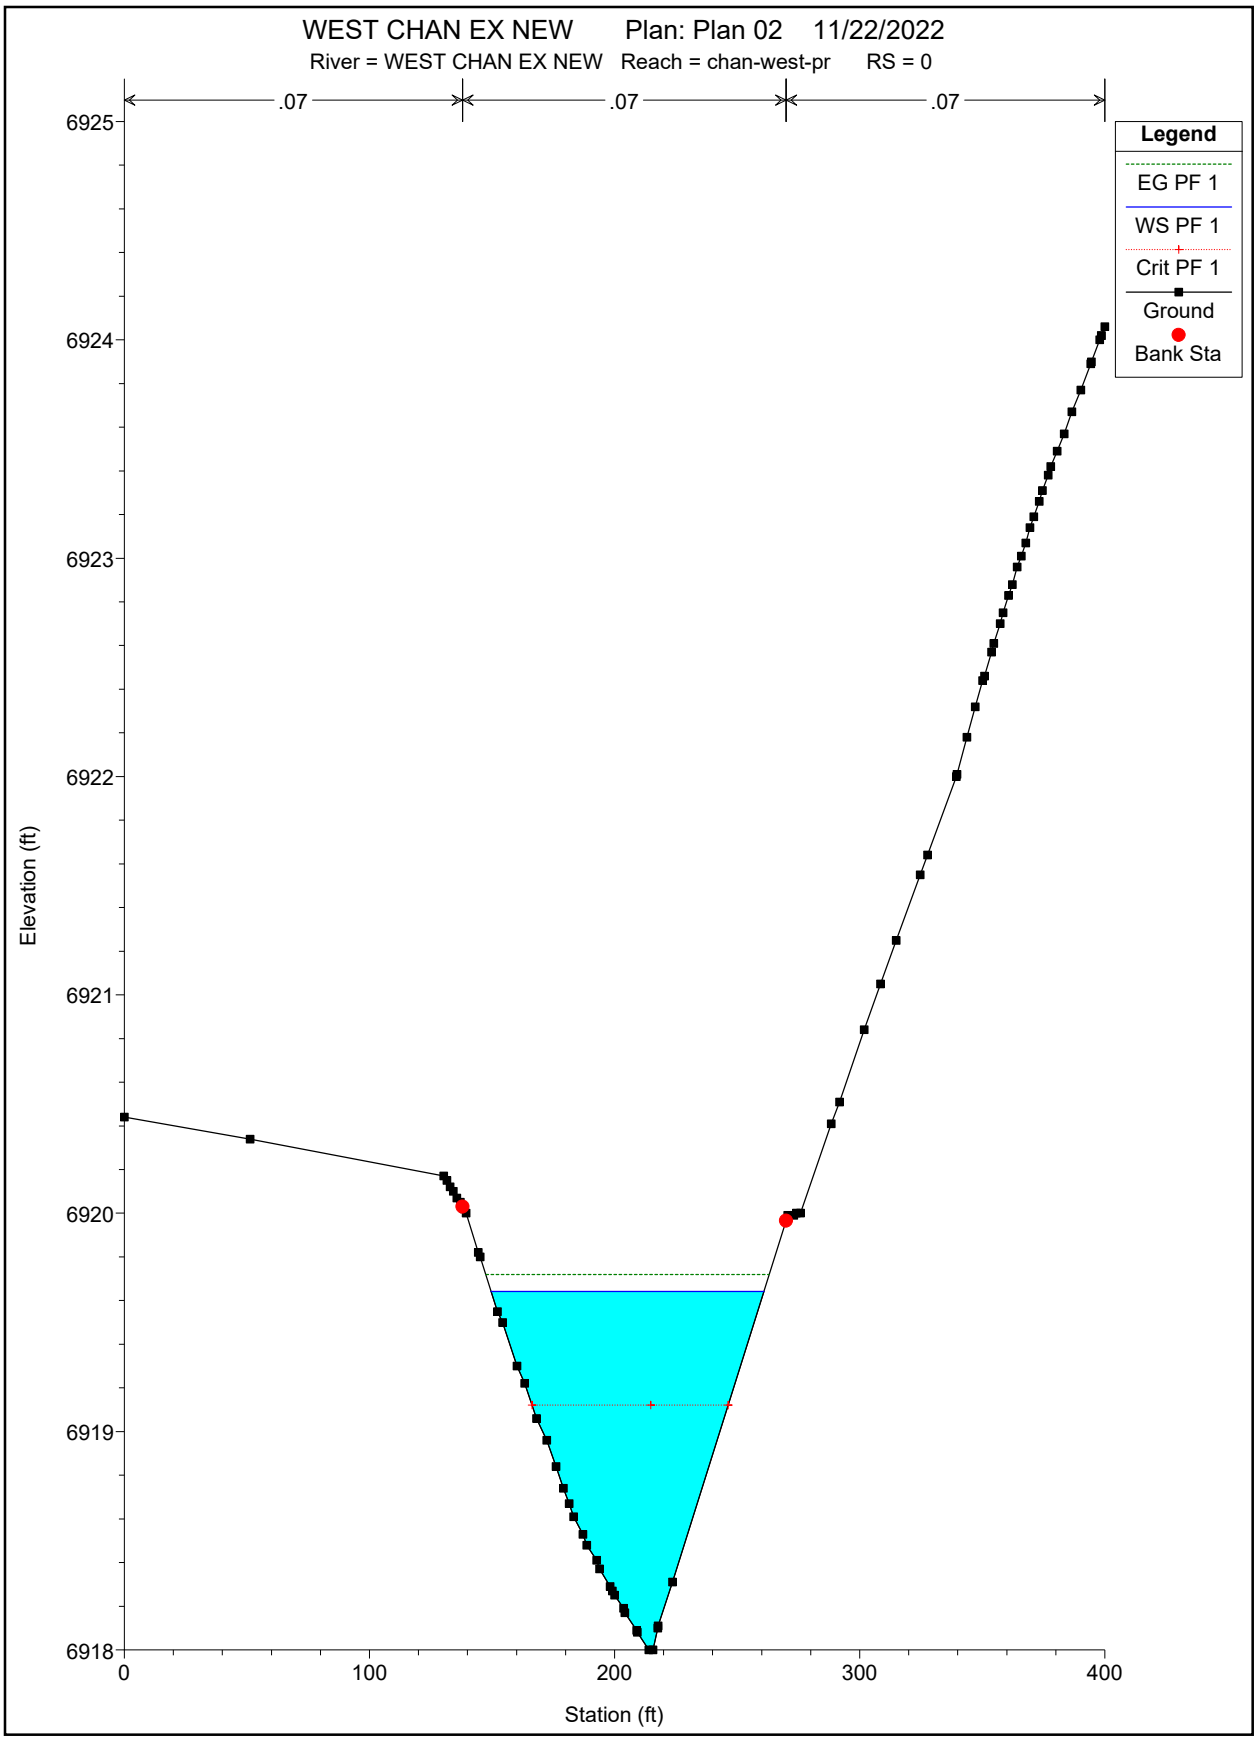
WEST CHAN EX NEW Plan: Plan 02 11/22/2022
River = WEST CHAN EX NEW Reach = chan-west-pr RS = 0
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6925
6924
6923
6922
6921
6920
6919
6918
0
100
200
300
400
Station (ft)

WEST CHANNEL PROPOSED CONDITIONS

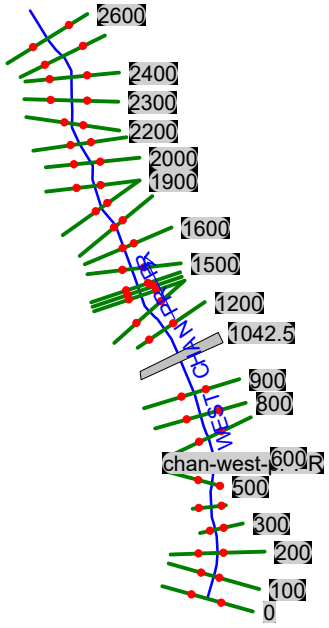

HEC-RAS Plan: PR River: WEST CHAN PR PR Reach: chan-west-pr-PR Profile: PF 1

Reach	River Sta	Profile	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
			(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft/s)	(sq ft)	(ft)	
chan-west-pr-PR	2600	PF 1	216.00	6966.83	6967.90		6967.97	0.019637	2.13	101.24	166.66	0.48
chan-west-pr-PR	2500	PF 1	216.00	6964.90	6965.87		6965.96	0.020519	2.29	94.20	143.85	0.50
chan-west-pr-PR	2400	PF 1	216.00	6963.25	6964.36		6964.41	0.011893	1.89	114.26	157.09	0.39
chan-west-pr-PR	2300	PF 1	216.00	6961.27	6962.44		6962.55	0.033352	2.67	80.77	140.86	0.62
chan-west-pr-PR	2200	PF 1	216.00	6958.46	6959.84		6959.96	0.020704	2.82	83.08	128.60	0.53
chan-west-pr-PR	2100	PF 1	216.00	6955.98	6957.72		6957.86	0.021346	2.93	73.61	79.89	0.54
chan-west-pr-PR	2000	PF 1	216.00	6954.57	6956.33		6956.41	0.010386	2.17	99.43	98.73	0.38
chan-west-pr-PR	1900	PF 1	216.00	6952.76	6954.62	6954.40	6954.76	0.029802	2.94	73.62	103.72	0.61
chan-west-pr-PR	1800	PF 1	216.00	6949.31	6951.93		6952.11	0.023436	3.40	63.64	61.03	0.58
chan-west-pr-PR	1700	PF 1	216.00	6947.11	6949.76		6949.96	0.019687	3.58	60.34	45.25	0.55
chan-west-pr-PR	1600	PF 1	216.00	6945.84	6948.25		6948.39	0.012697	2.99	73.63	63.87	0.45
chan-west-pr-PR	1500	PF 1	216.00	6944.91	6947.20		6947.28	0.009609	2.17	99.60	97.23	0.37
chan-west-pr-PR	1420.03	PF 1	216.00	6944.06	6945.20	6945.20	6945.52	0.087553	4.54	47.55	77.24	1.02
chan-west-pr-PR	1400	PF 1	216.00	6942.00	6942.89		6942.97	0.014054	2.29	94.34	108.30	0.43
chan-west-pr-PR	1379.97	PF 1	216.00	6941.43	6942.26		6942.45	0.058666	3.51	61.47	108.72	0.82
chan-west-pr-PR	1300	PF 1	216.00	6939.98	6942.24		6942.25	0.000570	0.82	262.35	126.12	0.10
chan-west-pr-PR	1200	PF 1	216.00	6938.82	6942.20	6939.60	6942.21	0.000285	0.71	306.22	110.15	0.07
chan-west-pr-PR	1042.5		Culvert									
chan-west-pr-PR	900	PF 1	222.00	6934.00	6936.26		6936.33	0.010413	2.14	103.57	104.79	0.38
chan-west-pr-PR	800	PF 1	222.00	6934.00	6935.46		6935.51	0.006641	1.68	132.03	137.92	0.30
chan-west-pr-PR	700	PF 1	222.00	6932.83	6934.09	6933.92	6934.23	0.032794	3.00	77.93	145.79	0.64
chan-west-pr-PR	600	PF 1	222.00	6930.96	6932.31		6932.37	0.011526	2.21	120.32	190.99	0.40
chan-west-pr-PR	500	PF 1	222.00	6928.39	6929.57	6929.57	6929.89	0.084942	4.57	48.57	76.43	1.01
chan-west-pr-PR	400	PF 1	222.00	6924.96	6927.00		6927.10	0.011696	2.57	86.30	72.60	0.42
chan-west-pr-PR	300	PF 1	222.00	6923.02	6924.22	6924.22	6924.63	0.079058	5.13	43.26	54.15	1.01
chan-west-pr-PR	200	PF 1	222.00	6919.08	6920.47		6920.58	0.016461	2.66	83.49	86.46	0.48
chan-west-pr-PR	100	PF 1	222.00	6917.36	6920.10		6920.13	0.001900	1.43	155.59	84.58	0.18
chan-west-pr-PR	0	PF 1	222.00	6918.00	6919.65	6919.14	6919.73	0.012996	2.24	99.29	111.76	0.42

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2600 Profile: PF 1

E.G. Elev (ft)	6967.97	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.		0.070	
W.S. Elev (ft)	6967.90	Reach Len. (ft)	100.00	100.00	100.00
Crit W.S. (ft)		Flow Area (sq ft)		101.24	
E.G. Slope (ft/ft)	0.019637	Area (sq ft)		101.24	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	166.66	Top Width (ft)		166.66	
Vel Total (ft/s)	2.13	Avg. Vel. (ft/s)		2.13	
Max Chl Dpth (ft)	1.07	Hydr. Depth (ft)		0.61	
Conv. Total (cfs)	1541.4	Conv. (cfs)		1541.4	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		166.68	
Min Ch El (ft)	6966.83	Shear (lb/sq ft)		0.74	
Alpha	1.00	Stream Power (lb/ft s)		1.59	
Frctn Loss (ft)	2.01	Cum Volume (acre-ft)	0.09	5.41	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.32	5.80	0.20

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2500 Profile: PF 1

E.G. Elev (ft)	6965.96	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.070	
W.S. Elev (ft)	6965.87	Reach Len. (ft)	126.00	100.00	64.00
Crit W.S. (ft)		Flow Area (sq ft)		94.20	
E.G. Slope (ft/ft)	0.020519	Area (sq ft)		94.20	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	143.85	Top Width (ft)		143.85	
Vel Total (ft/s)	2.29	Avg. Vel. (ft/s)		2.29	
Max Chl Dpth (ft)	0.97	Hydr. Depth (ft)		0.65	
Conv. Total (cfs)	1507.9	Conv. (cfs)		1507.9	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		143.87	
Min Ch El (ft)	6964.90	Shear (lb/sq ft)		0.84	
Alpha	1.00	Stream Power (lb/ft s)		1.92	
Frctn Loss (ft)	1.53	Cum Volume (acre-ft)	0.09	5.18	0.06
C & E Loss (ft)	0.01	Cum SA (acres)	0.32	5.44	0.20

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2400 Profile: PF 1

E.G. Elev (ft)	6964.41	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.06	Wt. n-Val.		0.070	0.070
W.S. Elev (ft)	6964.36	Reach Len. (ft)	110.00	100.00	106.00
Crit W.S. (ft)		Flow Area (sq ft)		114.16	0.11
E.G. Slope (ft/ft)	0.011893	Area (sq ft)		114.16	0.11
Q Total (cfs)	216.00	Flow (cfs)		215.97	0.03
Top Width (ft)	157.09	Top Width (ft)		154.49	2.60
Vel Total (ft/s)	1.89	Avg. Vel. (ft/s)		1.89	0.28
Max Chl Dpth (ft)	1.11	Hydr. Depth (ft)		0.74	0.04
Conv. Total (cfs)	1980.6	Conv. (cfs)		1980.4	0.3
Length Wtd. (ft)	100.00	Wetted Per. (ft)		154.52	2.60
Min Ch El (ft)	6963.25	Shear (lb/sq ft)		0.55	0.03
Alpha	1.00	Stream Power (lb/ft s)		1.04	0.01
Frctn Loss (ft)	1.86	Cum Volume (acre-ft)	0.09	4.94	0.06
C & E Loss (ft)	0.01	Cum SA (acres)	0.32	5.10	0.20

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2300 Profile: PF 1

E.G. Elev (ft)	6962.55	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.		0.070	
W.S. Elev (ft)	6962.44	Reach Len. (ft)	105.00	100.00	95.00
Crit W.S. (ft)		Flow Area (sq ft)		80.77	
E.G. Slope (ft/ft)	0.033352	Area (sq ft)		80.77	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	140.86	Top Width (ft)		140.86	
Vel Total (ft/s)	2.67	Avg. Vel. (ft/s)		2.67	
Max Chl Dpth (ft)	1.17	Hydr. Depth (ft)		0.57	
Conv. Total (cfs)	1182.8	Conv. (cfs)		1182.8	
Length Wtd. (ft)	99.93	Wetted Per. (ft)		140.96	
Min Ch El (ft)	6961.27	Shear (lb/sq ft)		1.19	
Alpha	1.00	Stream Power (lb/ft s)		3.19	
Frctn Loss (ft)	2.59	Cum Volume (acre-ft)	0.09	4.72	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.32	4.76	0.19

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2200 Profile: PF 1

E.G. Elev (ft)	6959.96	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.12	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6959.84	Reach Len. (ft)	79.00	100.00	99.60
Crit W.S. (ft)		Flow Area (sq ft)	4.44	71.16	7.48
E.G. Slope (ft/ft)	0.020704	Area (sq ft)	4.44	71.16	7.48
Q Total (cfs)	216.00	Flow (cfs)	4.62	200.98	10.40
Top Width (ft)	128.60	Top Width (ft)	22.35	80.00	26.25
Vel Total (ft/s)	2.60	Avg. Vel. (ft/s)	1.04	2.82	1.39
Max Chl Dpth (ft)	1.38	Hydr. Depth (ft)	0.20	0.89	0.28
Conv. Total (cfs)	1501.2	Conv. (cfs)	32.1	1396.8	72.3
Length Wtd. (ft)	99.77	Wetted Per. (ft)	22.35	80.03	26.36
Min Ch El (ft)	6958.46	Shear (lb/sq ft)	0.26	1.15	0.37
Alpha	1.12	Stream Power (lb/ft s)	0.27	3.25	0.51
Frctn Loss (ft)	2.10	Cum Volume (acre-ft)	0.08	4.54	0.05
C & E Loss (ft)	0.00	Cum SA (acres)	0.29	4.51	0.16

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2100 Profile: PF 1

E.G. Elev (ft)	6957.86	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.13	Wt. n-Val.		0.070	
W.S. Elev (ft)	6957.72	Reach Len. (ft)	91.60	100.00	83.00
Crit W.S. (ft)		Flow Area (sq ft)		73.61	
E.G. Slope (ft/ft)	0.021346	Area (sq ft)		73.61	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	79.89	Top Width (ft)		79.89	
Vel Total (ft/s)	2.93	Avg. Vel. (ft/s)		2.93	
Max Chl Dpth (ft)	1.74	Hydr. Depth (ft)		0.92	
Conv. Total (cfs)	1478.4	Conv. (cfs)		1478.4	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		79.97	
Min Ch El (ft)	6955.98	Shear (lb/sq ft)		1.23	
Alpha	1.00	Stream Power (lb/ft s)		3.60	
Frctn Loss (ft)	1.44	Cum Volume (acre-ft)	0.08	4.38	0.04
C & E Loss (ft)	0.02	Cum SA (acres)	0.27	4.32	0.13

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 2000 Profile: PF 1

E.G. Elev (ft)	6956.41	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.		0.070	
W.S. Elev (ft)	6956.33	Reach Len. (ft)	99.00	100.00	100.50
Crit W.S. (ft)		Flow Area (sq ft)		99.43	
E.G. Slope (ft/ft)	0.010386	Area (sq ft)		99.43	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	98.73	Top Width (ft)		98.73	
Vel Total (ft/s)	2.17	Avg. Vel. (ft/s)		2.17	
Max Chl Dpth (ft)	1.76	Hydr. Depth (ft)		1.01	
Conv. Total (cfs)	2119.5	Conv. (cfs)		2119.5	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		98.81	
Min Ch El (ft)	6954.57	Shear (lb/sq ft)		0.65	
Alpha	1.00	Stream Power (lb/ft s)		1.42	
Frctn Loss (ft)	1.64	Cum Volume (acre-ft)	0.08	4.18	0.04
C & E Loss (ft)	0.01	Cum SA (acres)	0.27	4.12	0.13

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1900 Profile: PF 1

E.G. Elev (ft)	6954.76	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.13	Wt. n-Val.	0.070	0.070	
W.S. Elev (ft)	6954.62	Reach Len. (ft)	82.00	100.00	268.00
Crit W.S. (ft)	6954.40	Flow Area (sq ft)	0.03	73.58	
E.G. Slope (ft/ft)	0.029802	Area (sq ft)	0.03	73.58	
Q Total (cfs)	216.00	Flow (cfs)	0.01	215.99	
Top Width (ft)	103.72	Top Width (ft)	1.24	102.49	
Vel Total (ft/s)	2.93	Avg. Vel. (ft/s)	0.33	2.94	
Max Chl Dpth (ft)	1.86	Hydr. Depth (ft)	0.03	0.72	
Conv. Total (cfs)	1251.2	Conv. (cfs)	0.1	1251.1	
Length Wtd. (ft)	100.00	Wetted Per. (ft)	1.24	102.64	
Min Ch El (ft)	6952.76	Shear (lb/sq ft)	0.05	1.33	
Alpha	1.00	Stream Power (lb/ft s)	0.02	3.92	
Frctn Loss (ft)	2.63	Cum Volume (acre-ft)	0.08	3.98	0.04
C & E Loss (ft)	0.00	Cum SA (acres)	0.27	3.89	0.13

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1800 Profile: PF 1

E.G. Elev (ft)	6952.11	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.18	Wt. n-Val.	0.070	0.070	
W.S. Elev (ft)	6951.93	Reach Len. (ft)	98.00	100.00	103.00
Crit W.S. (ft)		Flow Area (sq ft)	0.10	63.54	
E.G. Slope (ft/ft)	0.023436	Area (sq ft)	0.10	63.54	
Q Total (cfs)	216.00	Flow (cfs)	0.04	215.96	
Top Width (ft)	61.03	Top Width (ft)	2.05	58.97	
Vel Total (ft/s)	3.39	Avg. Vel. (ft/s)	0.43	3.40	
Max Chl Dpth (ft)	2.62	Hydr. Depth (ft)	0.05	1.08	
Conv. Total (cfs)	1410.9	Conv. (cfs)	0.3	1410.7	
Length Wtd. (ft)	100.00	Wetted Per. (ft)	2.06	59.41	
Min Ch El (ft)	6949.31	Shear (lb/sq ft)	0.07	1.56	
Alpha	1.00	Stream Power (lb/ft s)	0.03	5.32	
Frctn Loss (ft)	2.14	Cum Volume (acre-ft)	0.08	3.82	0.04
C & E Loss (ft)	0.00	Cum SA (acres)	0.27	3.70	0.13

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1700 Profile: PF 1

E.G. Elev (ft)	6949.96	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.20	Wt. n-Val.		0.070	
W.S. Elev (ft)	6949.76	Reach Len. (ft)	109.00	100.00	96.00
Crit W.S. (ft)		Flow Area (sq ft)		60.34	
E.G. Slope (ft/ft)	0.019687	Area (sq ft)		60.34	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	45.25	Top Width (ft)		45.25	
Vel Total (ft/s)	3.58	Avg. Vel. (ft/s)		3.58	
Max Chl Dpth (ft)	2.65	Hydr. Depth (ft)		1.33	
Conv. Total (cfs)	1539.5	Conv. (cfs)		1539.5	
Length Wtd. (ft)	100.01	Wetted Per. (ft)		45.80	
Min Ch El (ft)	6947.11	Shear (lb/sq ft)		1.62	
Alpha	1.00	Stream Power (lb/ft s)		5.80	
Frctn Loss (ft)	1.56	Cum Volume (acre-ft)	0.08	3.68	0.04
C & E Loss (ft)	0.02	Cum SA (acres)	0.27	3.58	0.13

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1600 Profile: PF 1

E.G. Elev (ft)	6948.39	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.14	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6948.25	Reach Len. (ft)	11.00	100.00	93.00
Crit W.S. (ft)		Flow Area (sq ft)	0.80	71.71	1.12
E.G. Slope (ft/ft)	0.012697	Area (sq ft)	0.80	71.71	1.12
Q Total (cfs)	216.00	Flow (cfs)	0.60	214.69	0.70
Top Width (ft)	63.87	Top Width (ft)	4.44	51.00	8.44
Vel Total (ft/s)	2.93	Avg. Vel. (ft/s)	0.76	2.99	0.62
Max Chl Dpth (ft)	2.41	Hydr. Depth (ft)	0.18	1.41	0.13
Conv. Total (cfs)	1916.9	Conv. (cfs)	5.4	1905.3	6.2
Length Wtd. (ft)	99.86	Wetted Per. (ft)	4.46	51.21	8.44
Min Ch El (ft)	6945.84	Shear (lb/sq ft)	0.14	1.11	0.11
Alpha	1.04	Stream Power (lb/ft s)	0.11	3.32	0.07
Frctn Loss (ft)	1.10	Cum Volume (acre-ft)	0.08	3.53	0.04
C & E Loss (ft)	0.02	Cum SA (acres)	0.26	3.47	0.13

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1500 Profile: PF 1

E.G. Elev (ft)	6947.28	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6947.20	Reach Len. (ft)	69.00	79.97	89.00
Crit W.S. (ft)		Flow Area (sq ft)	0.05	99.39	0.15
E.G. Slope (ft/ft)	0.009609	Area (sq ft)	0.05	99.39	0.15
Q Total (cfs)	216.00	Flow (cfs)	0.01	215.94	0.05
Top Width (ft)	97.23	Top Width (ft)	1.43	93.00	2.80
Vel Total (ft/s)	2.17	Avg. Vel. (ft/s)	0.24	2.17	0.30
Max Chl Dpth (ft)	2.29	Hydr. Depth (ft)	0.04	1.07	0.05
Conv. Total (cfs)	2203.5	Conv. (cfs)	0.1	2202.9	0.5
Length Wtd. (ft)	79.97	Wetted Per. (ft)	1.43	93.16	2.81
Min Ch El (ft)	6944.91	Shear (lb/sq ft)	0.02	0.64	0.03
Alpha	1.00	Stream Power (lb/ft s)	0.01	1.39	0.01
Frctn Loss (ft)	1.73	Cum Volume (acre-ft)	0.08	3.33	0.04
C & E Loss (ft)	0.02	Cum SA (acres)	0.26	3.31	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1420.03 Profile: PF 1

E.G. Elev (ft)	6945.52	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.32	Wt. n-Val.		0.070	
W.S. Elev (ft)	6945.20	Reach Len. (ft)	29.00	20.03	20.00
Crit W.S. (ft)	6945.20	Flow Area (sq ft)		47.55	
E.G. Slope (ft/ft)	0.087553	Area (sq ft)		47.55	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	77.24	Top Width (ft)		77.24	
Vel Total (ft/s)	4.54	Avg. Vel. (ft/s)		4.54	
Max Chl Dpth (ft)	1.14	Hydr. Depth (ft)		0.62	
Conv. Total (cfs)	730.0	Conv. (cfs)		730.0	
Length Wtd. (ft)	20.03	Wetted Per. (ft)		77.29	
Min Ch El (ft)	6944.06	Shear (lb/sq ft)		3.36	
Alpha	1.00	Stream Power (lb/ft s)		15.28	
Frctn Loss (ft)	0.57	Cum Volume (acre-ft)	0.08	3.20	0.04
C & E Loss (ft)	0.07	Cum SA (acres)	0.26	3.15	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1400 Profile: PF 1

E.G. Elev (ft)	6942.97	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.070	
W.S. Elev (ft)	6942.89	Reach Len. (ft)	20.00	20.03	20.03
Crit W.S. (ft)		Flow Area (sq ft)		94.34	
E.G. Slope (ft/ft)	0.014054	Area (sq ft)		94.34	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	108.30	Top Width (ft)		108.30	
Vel Total (ft/s)	2.29	Avg. Vel. (ft/s)		2.29	
Max Chl Dpth (ft)	0.89	Hydr. Depth (ft)		0.87	
Conv. Total (cfs)	1822.0	Conv. (cfs)		1822.0	
Length Wtd. (ft)	20.03	Wetted Per. (ft)		108.72	
Min Ch El (ft)	6942.00	Shear (lb/sq ft)		0.76	
Alpha	1.00	Stream Power (lb/ft s)		1.74	
Frctn Loss (ft)	0.51	Cum Volume (acre-ft)	0.08	3.17	0.04
C & E Loss (ft)	0.01	Cum SA (acres)	0.26	3.11	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1379.97 Profile: PF 1

E.G. Elev (ft)	6942.45	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.19	Wt. n-Val.		0.070	
W.S. Elev (ft)	6942.26	Reach Len. (ft)	51.00	79.97	105.00
Crit W.S. (ft)		Flow Area (sq ft)		61.47	
E.G. Slope (ft/ft)	0.058666	Area (sq ft)		61.47	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	108.72	Top Width (ft)		108.72	
Vel Total (ft/s)	3.51	Avg. Vel. (ft/s)		3.51	
Max Chl Dpth (ft)	0.83	Hydr. Depth (ft)		0.57	
Conv. Total (cfs)	891.8	Conv. (cfs)		891.8	
Length Wtd. (ft)	79.97	Wetted Per. (ft)		108.80	
Min Ch El (ft)	6941.43	Shear (lb/sq ft)		2.07	
Alpha	1.00	Stream Power (lb/ft s)		7.27	
Frctn Loss (ft)	0.15	Cum Volume (acre-ft)	0.08	3.13	0.04
C & E Loss (ft)	0.05	Cum SA (acres)	0.26	3.06	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1300 Profile: PF 1

E.G. Elev (ft)	6942.25	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.01	Wt. n-Val.		0.070	
W.S. Elev (ft)	6942.24	Reach Len. (ft)	107.00	100.00	89.00
Crit W.S. (ft)		Flow Area (sq ft)		262.35	
E.G. Slope (ft/ft)	0.000570	Area (sq ft)		262.35	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	126.12	Top Width (ft)		126.12	
Vel Total (ft/s)	0.82	Avg. Vel. (ft/s)		0.82	
Max Chl Dpth (ft)	2.26	Hydr. Depth (ft)		2.08	
Conv. Total (cfs)	9049.4	Conv. (cfs)		9049.4	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		126.66	
Min Ch El (ft)	6939.98	Shear (lb/sq ft)		0.07	
Alpha	1.00	Stream Power (lb/ft s)		0.06	
Frctn Loss (ft)	0.04	Cum Volume (acre-ft)	0.08	2.83	0.04
C & E Loss (ft)	0.00	Cum SA (acres)	0.26	2.84	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 1200 Profile: PF 1

E.G. Elev (ft)	6942.21	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.01	Wt. n-Val.		0.070	
W.S. Elev (ft)	6942.20	Reach Len. (ft)	323.00	300.00	288.00
Crit W.S. (ft)	6939.60	Flow Area (sq ft)		306.22	
E.G. Slope (ft/ft)	0.000285	Area (sq ft)		306.22	
Q Total (cfs)	216.00	Flow (cfs)		216.00	
Top Width (ft)	110.15	Top Width (ft)		110.15	
Vel Total (ft/s)	0.71	Avg. Vel. (ft/s)		0.71	
Max Chl Dpth (ft)	3.38	Hydr. Depth (ft)		2.78	
Conv. Total (cfs)	12804.6	Conv. (cfs)		12804.6	
Length Wtd. (ft)	300.00	Wetted Per. (ft)		110.76	
Min Ch El (ft)	6938.82	Shear (lb/sq ft)		0.05	
Alpha	1.00	Stream Power (lb/ft s)		0.03	
Frctn Loss (ft)		Cum Volume (acre-ft)	0.08	2.18	0.04
C & E Loss (ft)		Cum SA (acres)	0.26	2.57	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 900 Profile: PF 1

E.G. Elev (ft)	6936.33	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.		0.070	
W.S. Elev (ft)	6936.26	Reach Len. (ft)	105.00	100.00	99.00
Crit W.S. (ft)		Flow Area (sq ft)		103.57	
E.G. Slope (ft/ft)	0.010413	Area (sq ft)		103.57	
Q Total (cfs)	222.00	Flow (cfs)		222.00	
Top Width (ft)	104.79	Top Width (ft)		104.79	
Vel Total (ft/s)	2.14	Avg. Vel. (ft/s)		2.14	
Max Chl Dpth (ft)	2.26	Hydr. Depth (ft)		0.99	
Conv. Total (cfs)	2175.5	Conv. (cfs)		2175.5	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		105.21	
Min Ch El (ft)	6934.00	Shear (lb/sq ft)		0.64	
Alpha	1.00	Stream Power (lb/ft s)		1.37	
Frctn Loss (ft)	0.82	Cum Volume (acre-ft)	0.08	1.83	0.04
C & E Loss (ft)	0.01	Cum SA (acres)	0.26	1.83	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 800 Profile: PF 1

E.G. Elev (ft)	6935.51	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.04	Wt. n-Val.	0.070	0.070	
W.S. Elev (ft)	6935.46	Reach Len. (ft)	90.00	100.00	110.00
Crit W.S. (ft)		Flow Area (sq ft)	0.03	132.01	
E.G. Slope (ft/ft)	0.006641	Area (sq ft)	0.03	132.01	
Q Total (cfs)	222.00	Flow (cfs)	0.01	221.99	
Top Width (ft)	137.92	Top Width (ft)	0.41	137.51	
Vel Total (ft/s)	1.68	Avg. Vel. (ft/s)	0.26	1.68	
Max Chl Dpth (ft)	1.46	Hydr. Depth (ft)	0.06	0.96	
Conv. Total (cfs)	2724.1	Conv. (cfs)	0.1	2724.0	
Length Wtd. (ft)	99.87	Wetted Per. (ft)	0.43	137.72	
Min Ch El (ft)	6934.00	Shear (lb/sq ft)	0.02	0.40	
Alpha	1.00	Stream Power (lb/ft s)	0.01	0.67	
Frctn Loss (ft)	1.26	Cum Volume (acre-ft)	0.08	1.56	0.04
C & E Loss (ft)	0.01	Cum SA (acres)	0.26	1.55	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 700 Profile: PF 1

E.G. Elev (ft)	6934.23	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.14	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6934.09	Reach Len. (ft)	122.00	100.00	83.00
Crit W.S. (ft)	6933.92	Flow Area (sq ft)	5.69	71.76	0.48
E.G. Slope (ft/ft)	0.032794	Area (sq ft)	5.69	71.76	0.48
Q Total (cfs)	222.00	Flow (cfs)	6.21	215.36	0.44
Top Width (ft)	145.79	Top Width (ft)	37.69	104.00	4.10
Vel Total (ft/s)	2.85	Avg. Vel. (ft/s)	1.09	3.00	0.91
Max Chl Dpth (ft)	1.26	Hydr. Depth (ft)	0.15	0.69	0.12
Conv. Total (cfs)	1225.9	Conv. (cfs)	34.3	1189.2	2.4
Length Wtd. (ft)	100.74	Wetted Per. (ft)	37.71	104.03	4.19
Min Ch El (ft)	6932.83	Shear (lb/sq ft)	0.31	1.41	0.23
Alpha	1.08	Stream Power (lb/ft s)	0.34	4.24	0.21
Frctn Loss (ft)	1.83	Cum Volume (acre-ft)	0.07	1.32	0.04
C & E Loss (ft)	0.02	Cum SA (acres)	0.22	1.28	0.11

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 600 Profile: PF 1

E.G. Elev (ft)	6932.37	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.06	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6932.31	Reach Len. (ft)	110.00	100.00	80.00
Crit W.S. (ft)		Flow Area (sq ft)	24.44	74.61	21.27
E.G. Slope (ft/ft)	0.011526	Area (sq ft)	24.44	74.61	21.27
Q Total (cfs)	222.00	Flow (cfs)	29.94	165.05	27.01
Top Width (ft)	190.99	Top Width (ft)	61.98	78.00	51.01
Vel Total (ft/s)	1.85	Avg. Vel. (ft/s)	1.22	2.21	1.27
Max Chl Dpth (ft)	1.35	Hydr. Depth (ft)	0.39	0.96	0.42
Conv. Total (cfs)	2067.8	Conv. (cfs)	278.9	1537.4	251.6
Length Wtd. (ft)	99.46	Wetted Per. (ft)	62.03	78.02	51.11
Min Ch El (ft)	6930.96	Shear (lb/sq ft)	0.28	0.69	0.30
Alpha	1.19	Stream Power (lb/ft s)	0.35	1.52	0.38
Frctn Loss (ft)	2.45	Cum Volume (acre-ft)	0.03	1.16	0.02
C & E Loss (ft)	0.03	Cum SA (acres)	0.08	1.07	0.05

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 500 Profile: PF 1

E.G. Elev (ft)	6929.89	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.32	Wt. n-Val.		0.070	
W.S. Elev (ft)	6929.57	Reach Len. (ft)	85.00	100.00	119.00
Crit W.S. (ft)	6929.57	Flow Area (sq ft)		48.57	
E.G. Slope (ft/ft)	0.084942	Area (sq ft)		48.57	
Q Total (cfs)	222.00	Flow (cfs)		222.00	
Top Width (ft)	76.43	Top Width (ft)		76.43	
Vel Total (ft/s)	4.57	Avg. Vel. (ft/s)		4.57	
Max Chl Dpth (ft)	1.18	Hydr. Depth (ft)		0.64	
Conv. Total (cfs)	761.7	Conv. (cfs)		761.7	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		76.48	
Min Ch El (ft)	6928.39	Shear (lb/sq ft)		3.37	
Alpha	1.00	Stream Power (lb/ft s)		15.39	
Frctn Loss (ft)	2.49	Cum Volume (acre-ft)	0.00	1.02	0.00
C & E Loss (ft)	0.07	Cum SA (acres)	0.00	0.89	0.01

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 400 Profile: PF 1

E.G. Elev (ft)	6927.10	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.10	Wt. n-Val.		0.070	
W.S. Elev (ft)	6927.00	Reach Len. (ft)	94.00	100.00	108.00
Crit W.S. (ft)		Flow Area (sq ft)		86.30	
E.G. Slope (ft/ft)	0.011696	Area (sq ft)		86.30	
Q Total (cfs)	222.00	Flow (cfs)		222.00	
Top Width (ft)	72.60	Top Width (ft)		72.60	
Vel Total (ft/s)	2.57	Avg. Vel. (ft/s)		2.57	
Max Chl Dpth (ft)	2.04	Hydr. Depth (ft)		1.19	
Conv. Total (cfs)	2052.7	Conv. (cfs)		2052.7	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		72.76	
Min Ch El (ft)	6924.96	Shear (lb/sq ft)		0.87	
Alpha	1.00	Stream Power (lb/ft s)		2.23	
Frctn Loss (ft)	2.44	Cum Volume (acre-ft)	0.00	0.86	0.00
C & E Loss (ft)	0.03	Cum SA (acres)	0.00	0.72	0.01

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 300 Profile: PF 1

E.G. Elev (ft)	6924.63	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.41	Wt. n-Val.		0.070	
W.S. Elev (ft)	6924.22	Reach Len. (ft)	106.00	100.00	109.00
Crit W.S. (ft)	6924.22	Flow Area (sq ft)		43.26	
E.G. Slope (ft/ft)	0.079058	Area (sq ft)		43.26	
Q Total (cfs)	222.00	Flow (cfs)		222.00	
Top Width (ft)	54.15	Top Width (ft)		54.15	
Vel Total (ft/s)	5.13	Avg. Vel. (ft/s)		5.13	
Max Chl Dpth (ft)	1.20	Hydr. Depth (ft)		0.80	
Conv. Total (cfs)	789.5	Conv. (cfs)		789.5	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		54.26	
Min Ch El (ft)	6923.02	Shear (lb/sq ft)		3.94	
Alpha	1.00	Stream Power (lb/ft s)		20.19	
Frctn Loss (ft)	3.10	Cum Volume (acre-ft)	0.00	0.71	0.00
C & E Loss (ft)	0.09	Cum SA (acres)	0.00	0.57	0.01

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 200 Profile: PF 1

E.G. Elev (ft)	6920.58	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.		0.070	
W.S. Elev (ft)	6920.47	Reach Len. (ft)	107.00	100.00	81.00
Crit W.S. (ft)		Flow Area (sq ft)		83.49	
E.G. Slope (ft/ft)	0.016461	Area (sq ft)		83.49	
Q Total (cfs)	222.00	Flow (cfs)		222.00	
Top Width (ft)	86.46	Top Width (ft)		86.46	
Vel Total (ft/s)	2.66	Avg. Vel. (ft/s)		2.66	
Max Chl Dpth (ft)	1.39	Hydr. Depth (ft)		0.97	
Conv. Total (cfs)	1730.3	Conv. (cfs)		1730.3	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		86.55	
Min Ch El (ft)	6919.08	Shear (lb/sq ft)		0.99	
Alpha	1.00	Stream Power (lb/ft s)		2.64	
Frctn Loss (ft)	0.42	Cum Volume (acre-ft)	0.00	0.57	0.00
C & E Loss (ft)	0.02	Cum SA (acres)	0.00	0.41	0.01

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 100 Profile: PF 1

E.G. Elev (ft)	6920.13	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.03	Wt. n-Val.	0.070	0.070	0.070
W.S. Elev (ft)	6920.10	Reach Len. (ft)	107.00	100.00	90.60
Crit W.S. (ft)		Flow Area (sq ft)	0.11	155.34	0.14
E.G. Slope (ft/ft)	0.001900	Area (sq ft)	0.11	155.34	0.14
Q Total (cfs)	222.00	Flow (cfs)	0.02	221.96	0.02
Top Width (ft)	84.58	Top Width (ft)	0.99	80.70	2.89
Vel Total (ft/s)	1.43	Avg. Vel. (ft/s)	0.21	1.43	0.12
Max Chl Dpth (ft)	2.74	Hydr. Depth (ft)	0.11	1.92	0.05
Conv. Total (cfs)	5092.4	Conv. (cfs)	0.6	5091.4	0.4
Length Wtd. (ft)	100.00	Wetted Per. (ft)	1.01	80.96	2.89
Min Ch El (ft)	6917.36	Shear (lb/sq ft)	0.01	0.23	0.01
Alpha	1.00	Stream Power (lb/ft s)	0.00	0.33	0.00
Frctn Loss (ft)	0.40	Cum Volume (acre-ft)	0.00	0.29	0.00
C & E Loss (ft)	0.00	Cum SA (acres)	0.00	0.22	0.00

Plan: PR WEST CHAN PR PR chan-west-pr-PR RS: 0 Profile: PF 1

E.G. Elev (ft)	6919.73	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.070	
W.S. Elev (ft)	6919.65	Reach Len. (ft)			
Crit W.S. (ft)	6919.14	Flow Area (sq ft)		99.29	
E.G. Slope (ft/ft)	0.012996	Area (sq ft)		99.29	
Q Total (cfs)	222.00	Flow (cfs)		222.00	
Top Width (ft)	111.76	Top Width (ft)		111.76	
Vel Total (ft/s)	2.24	Avg. Vel. (ft/s)		2.24	
Max Chl Dpth (ft)	1.65	Hydr. Depth (ft)		0.89	
Conv. Total (cfs)	1947.4	Conv. (cfs)		1947.4	
Length Wtd. (ft)		Wetted Per. (ft)		111.81	
Min Ch El (ft)	6918.00	Shear (lb/sq ft)		0.72	
Alpha	1.00	Stream Power (lb/ft s)		1.61	
Frctn Loss (ft)		Cum Volume (acre-ft)			
C & E Loss (ft)		Cum SA (acres)			

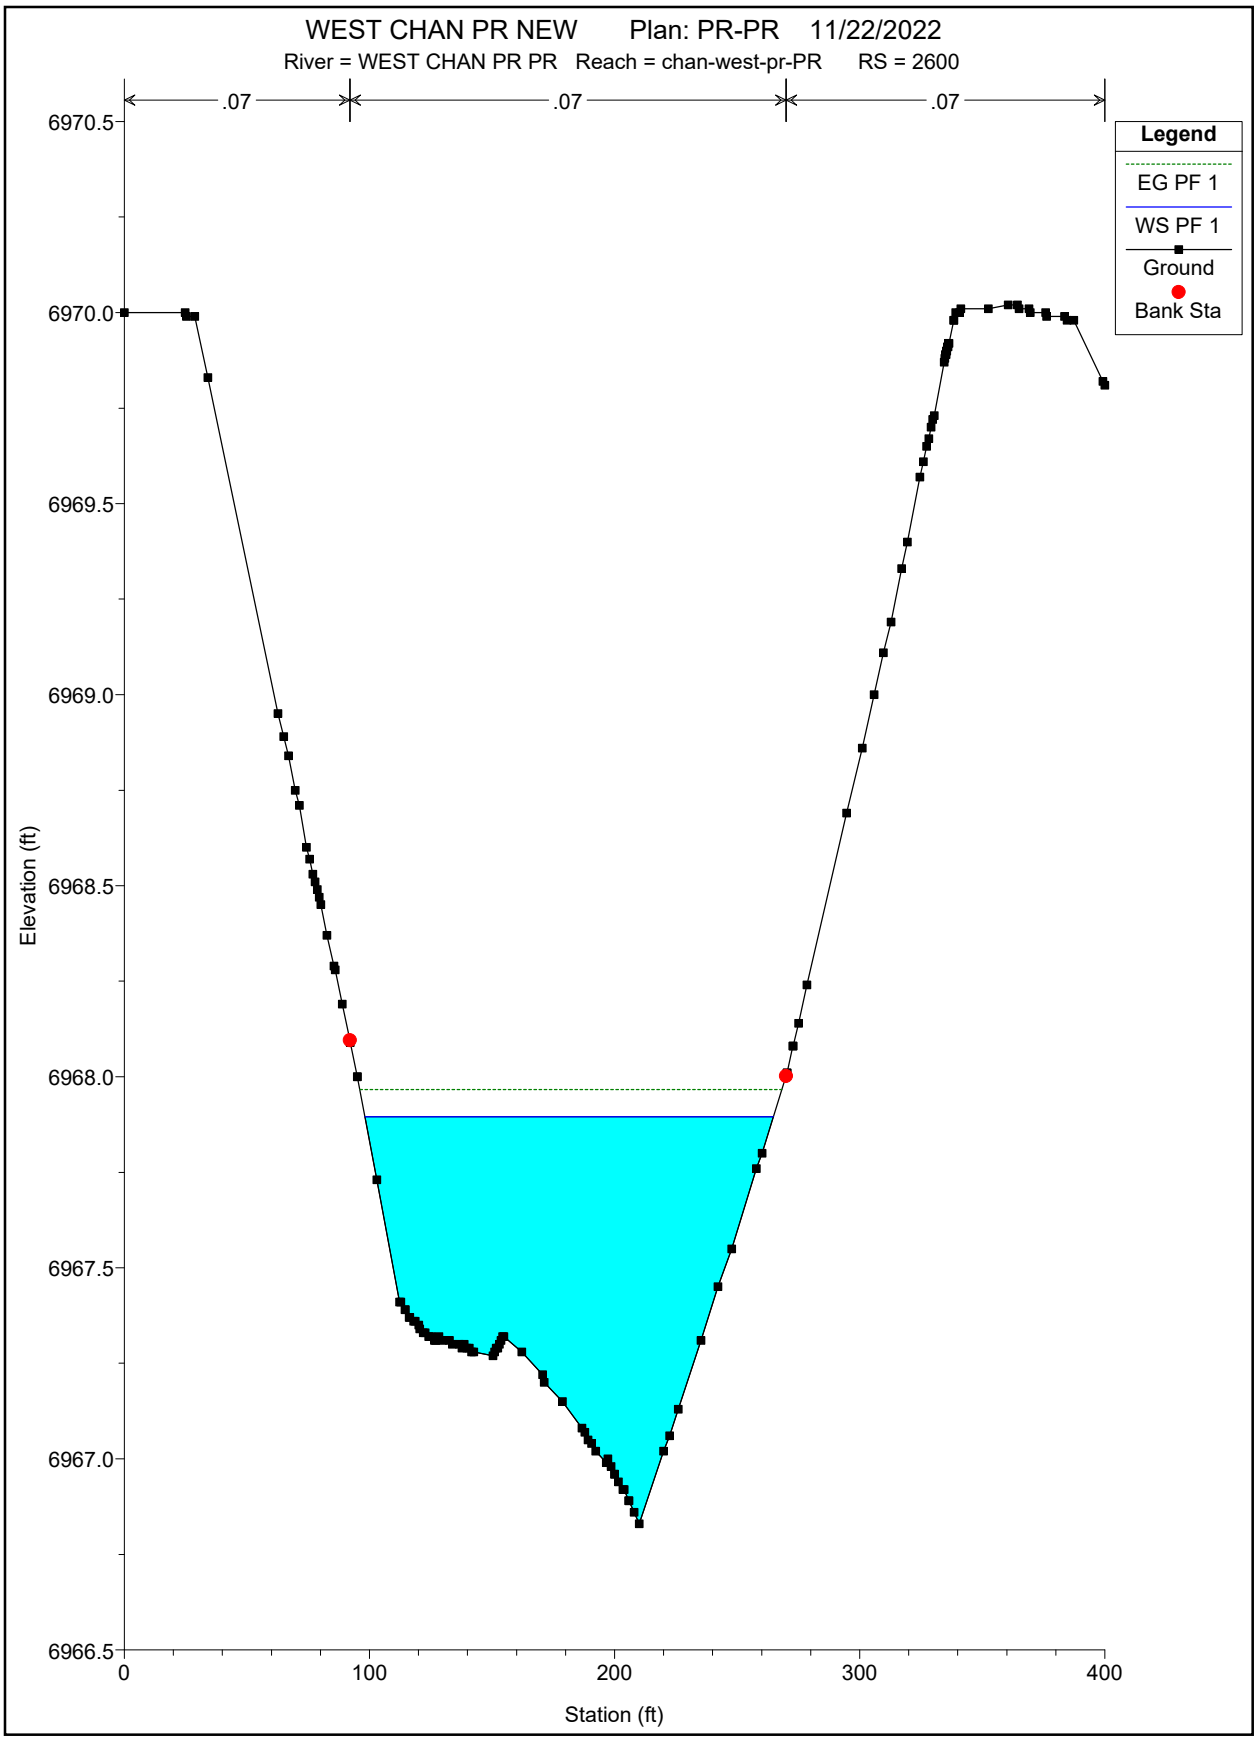
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2600
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6970.5
6970.0
6969.5
6969.0
6968.5
6968.0
6967.5
6967.0
6966.5
Elevation (ft)
0
100
200
300
400
Station (ft)

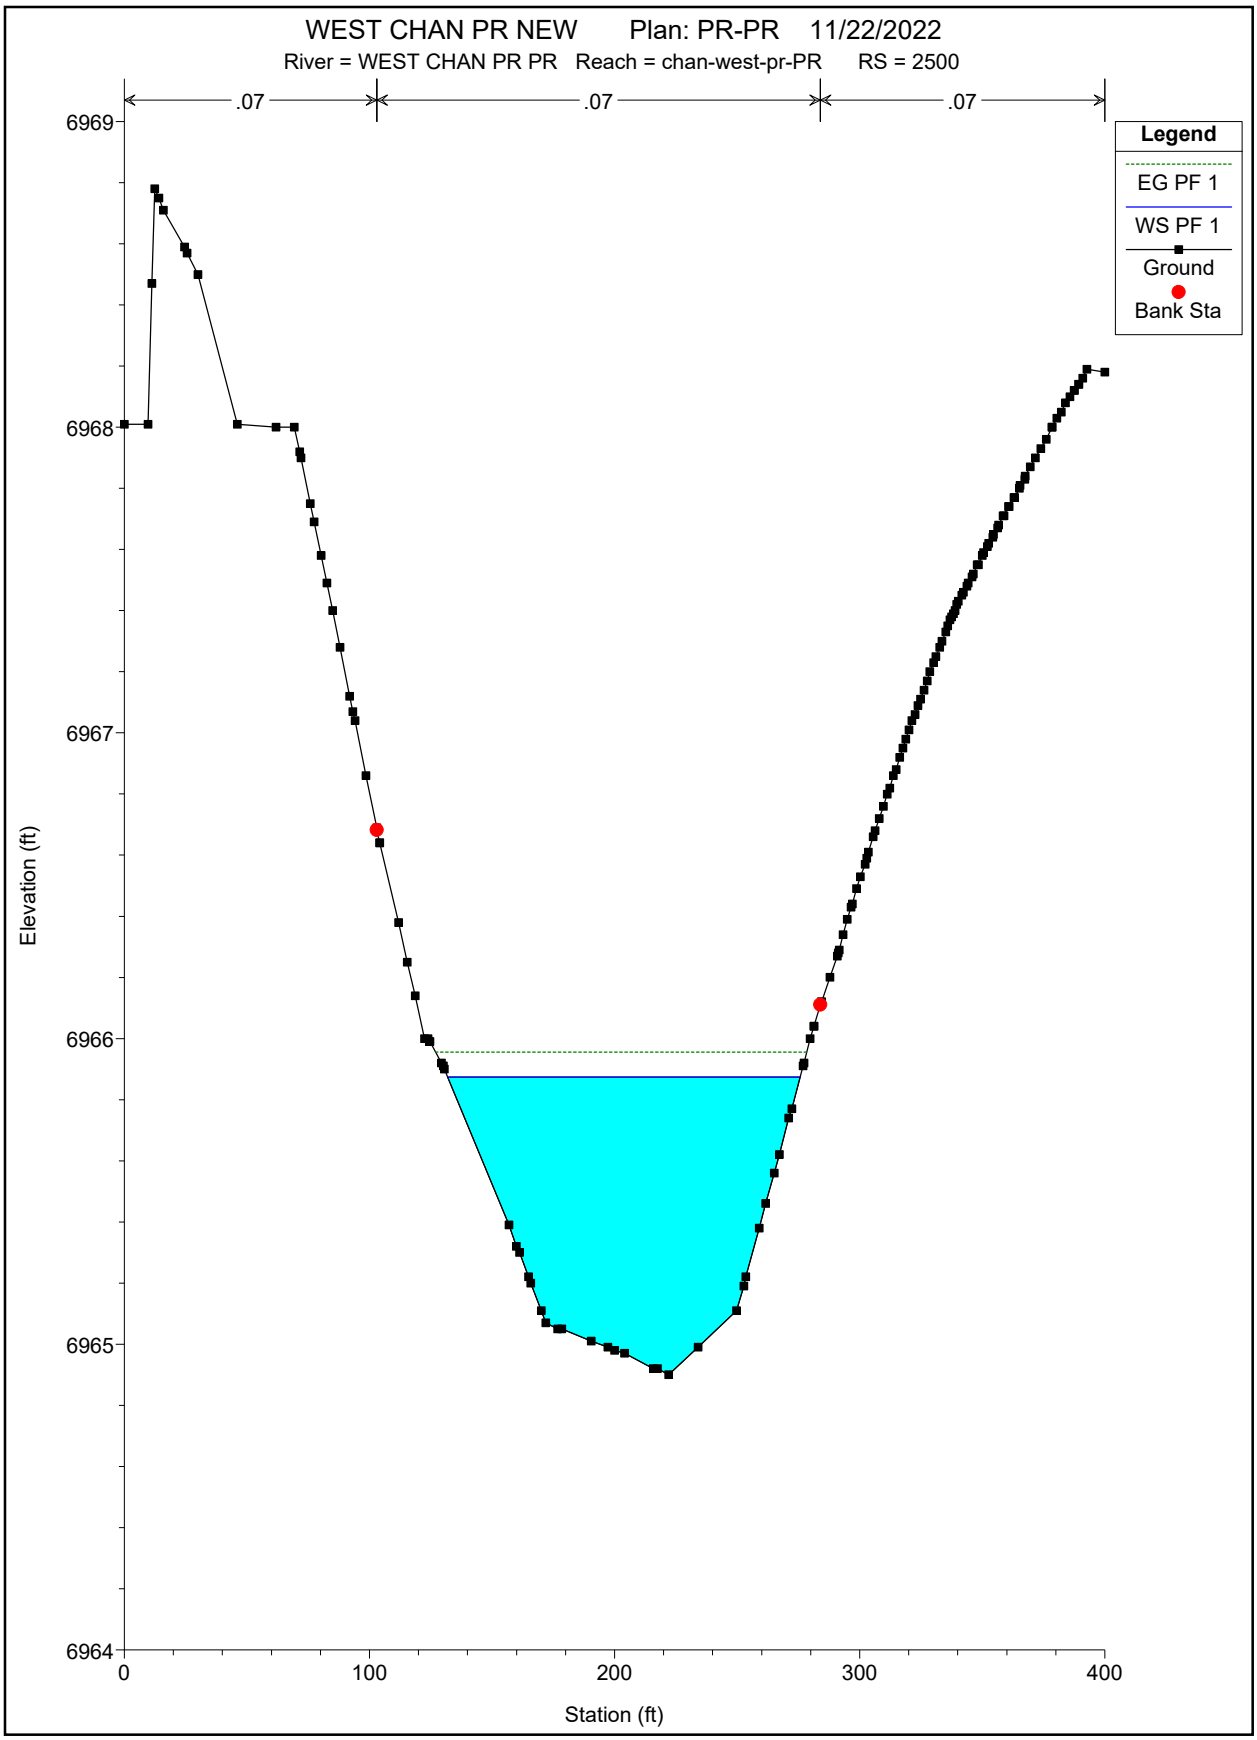
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2500
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6969
6968
6967
6966
6965
6964
Elevation (ft)
0
100
200
300
400
Station (ft)

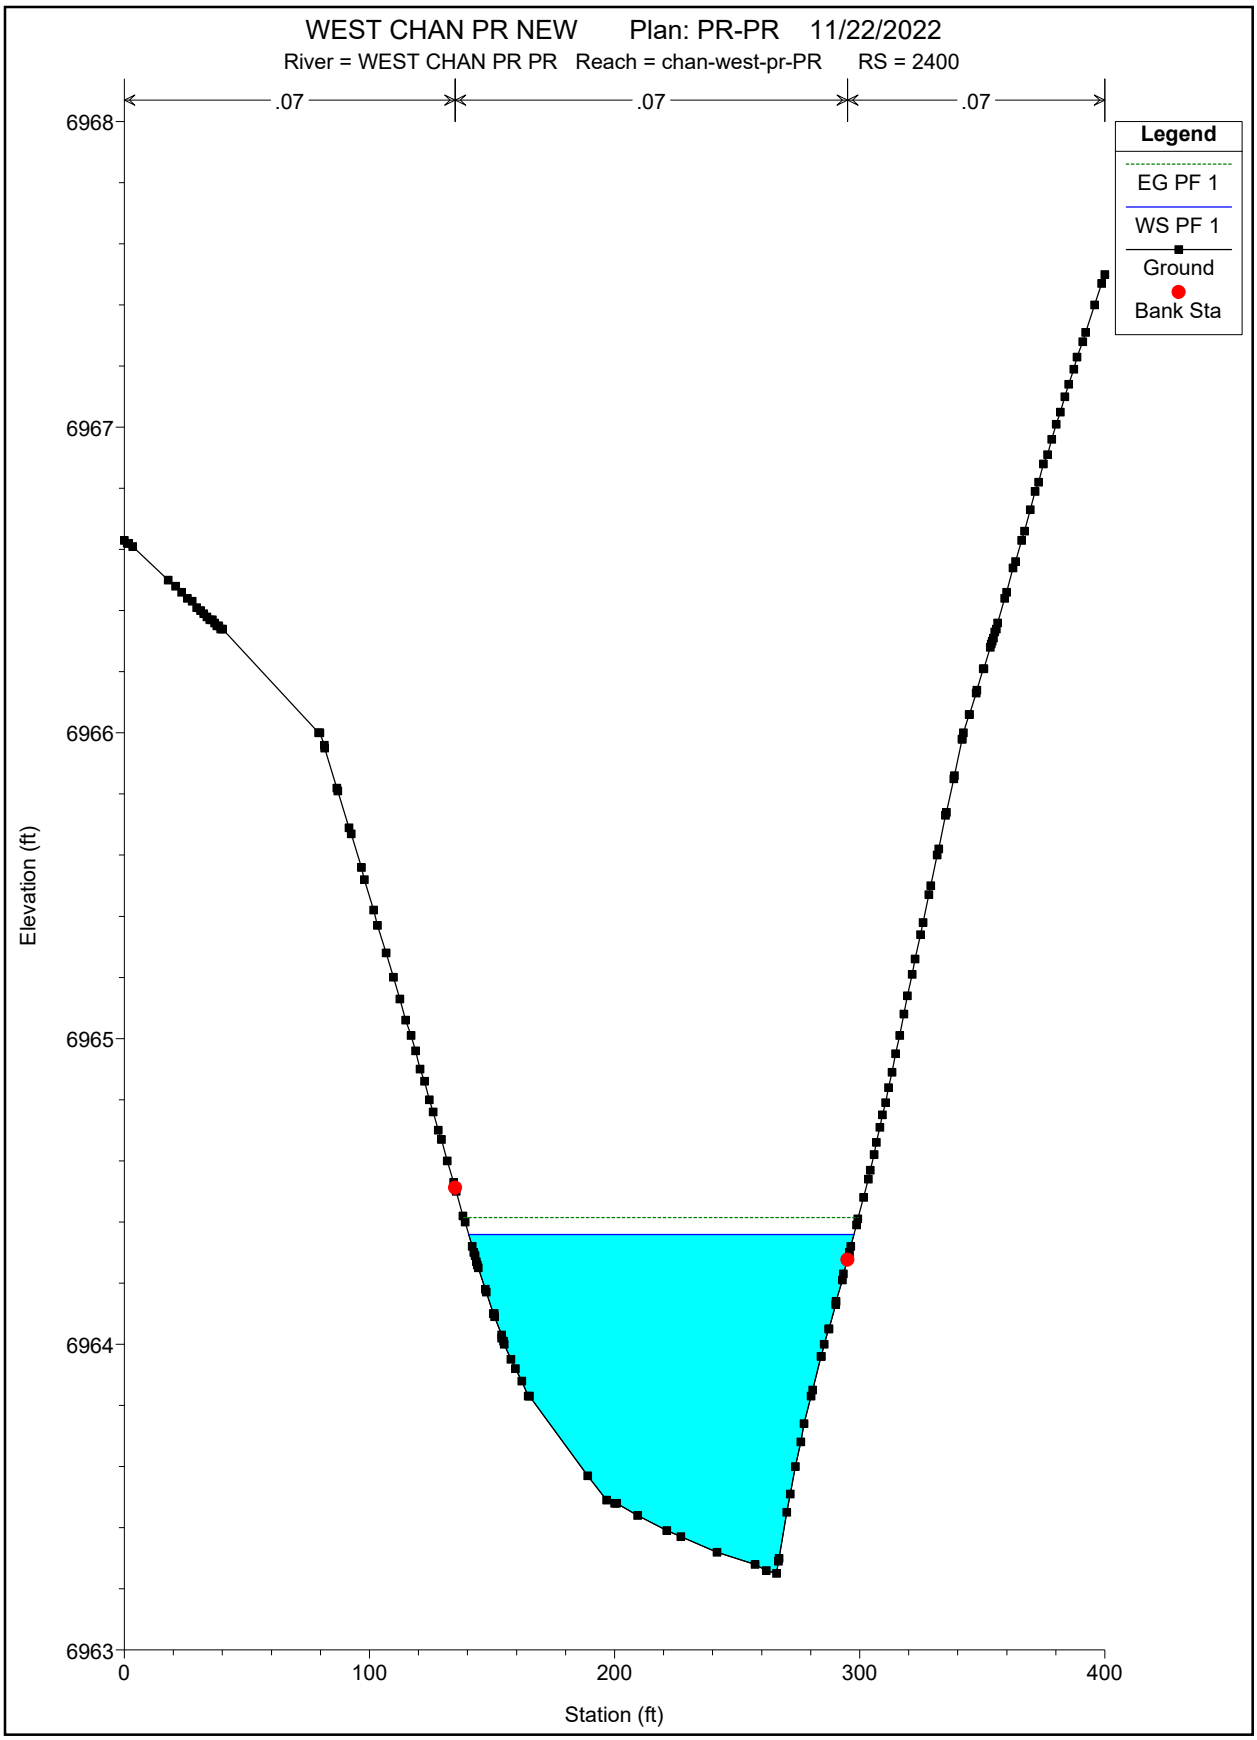
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2400
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6968
6967
6966
6965
6964
6963
Elevation (ft)
0
100
200
300
400
Station (ft)

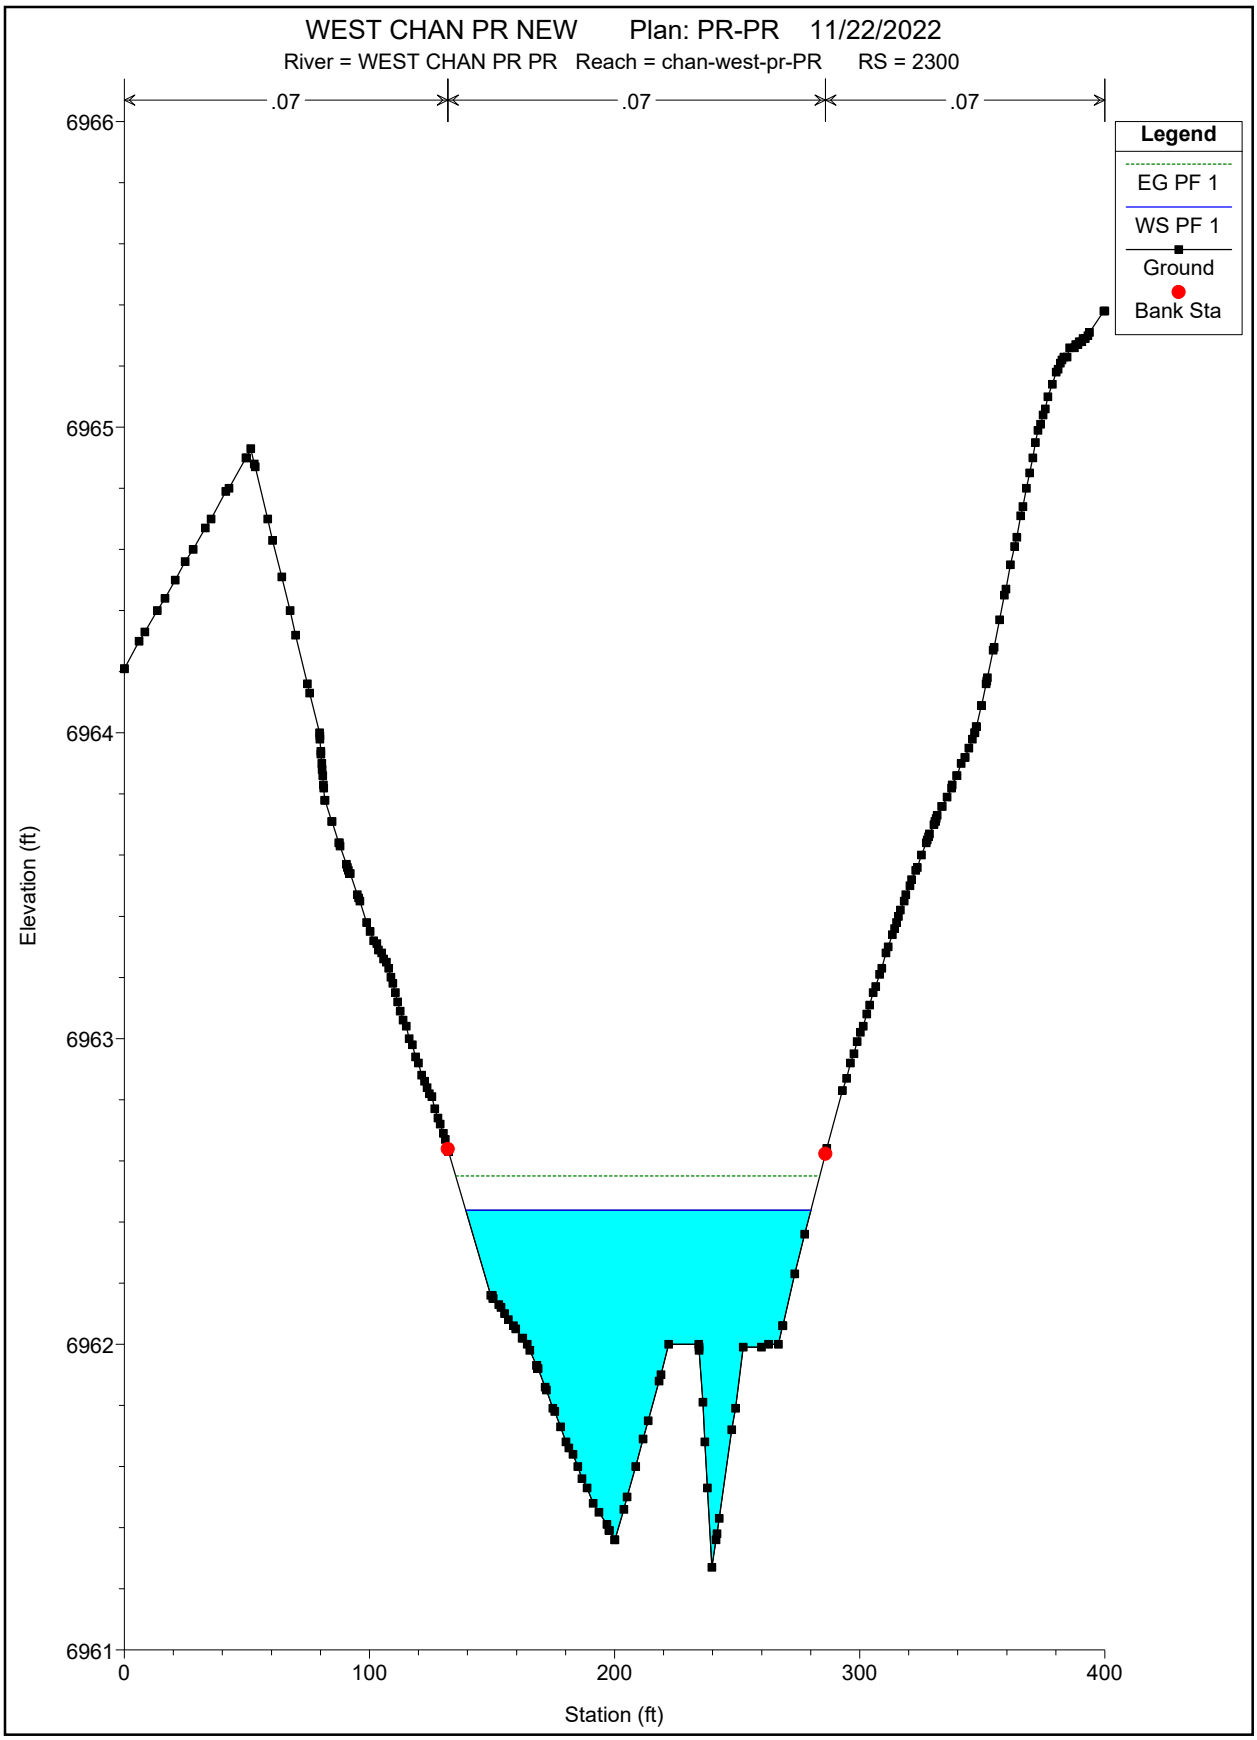
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2300
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6966
6965
6964
6963
6962
6961
Elevation (ft)
0
100
200
300
400
Station (ft)

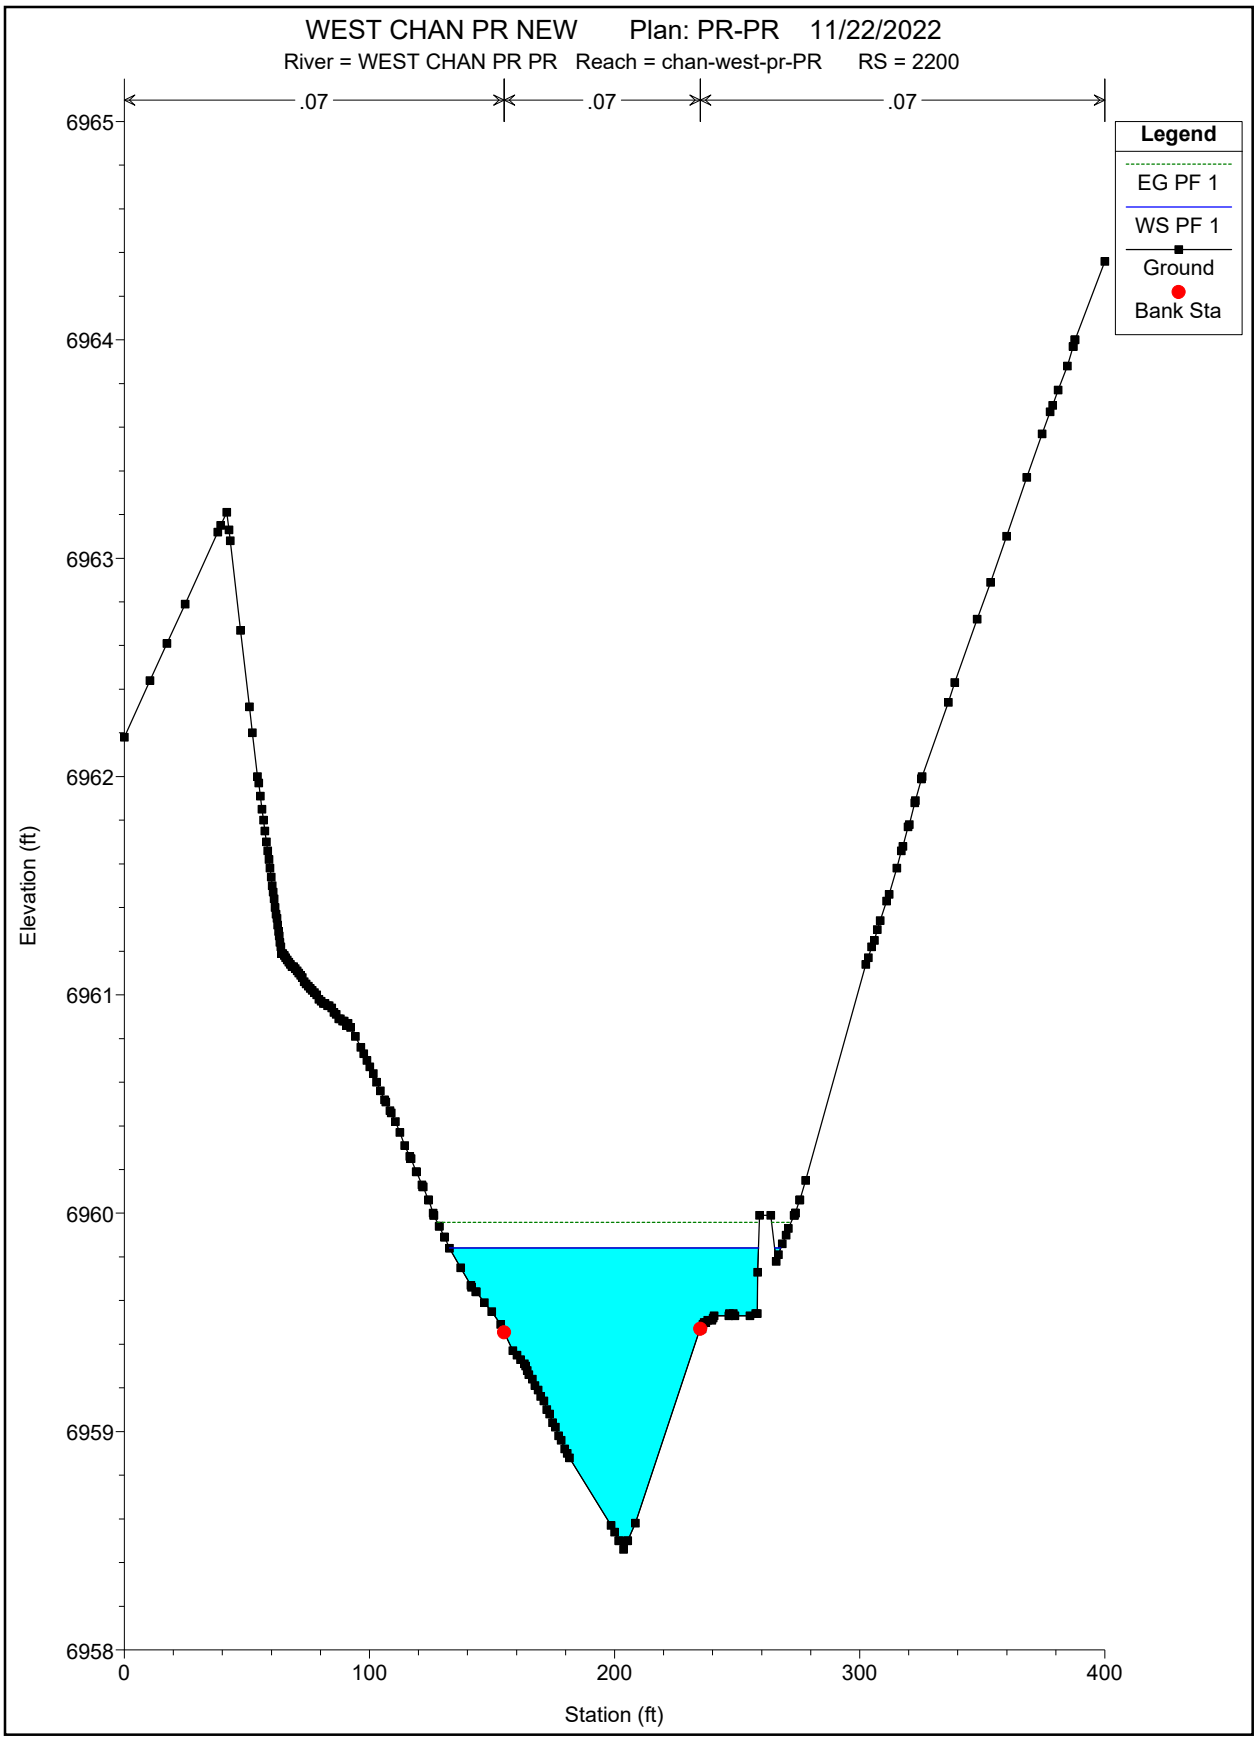
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2200
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6965
6964
6963
6962
6961
6960
6959
6958
Elevation (ft)
0
100
200
300
400
Station (ft)

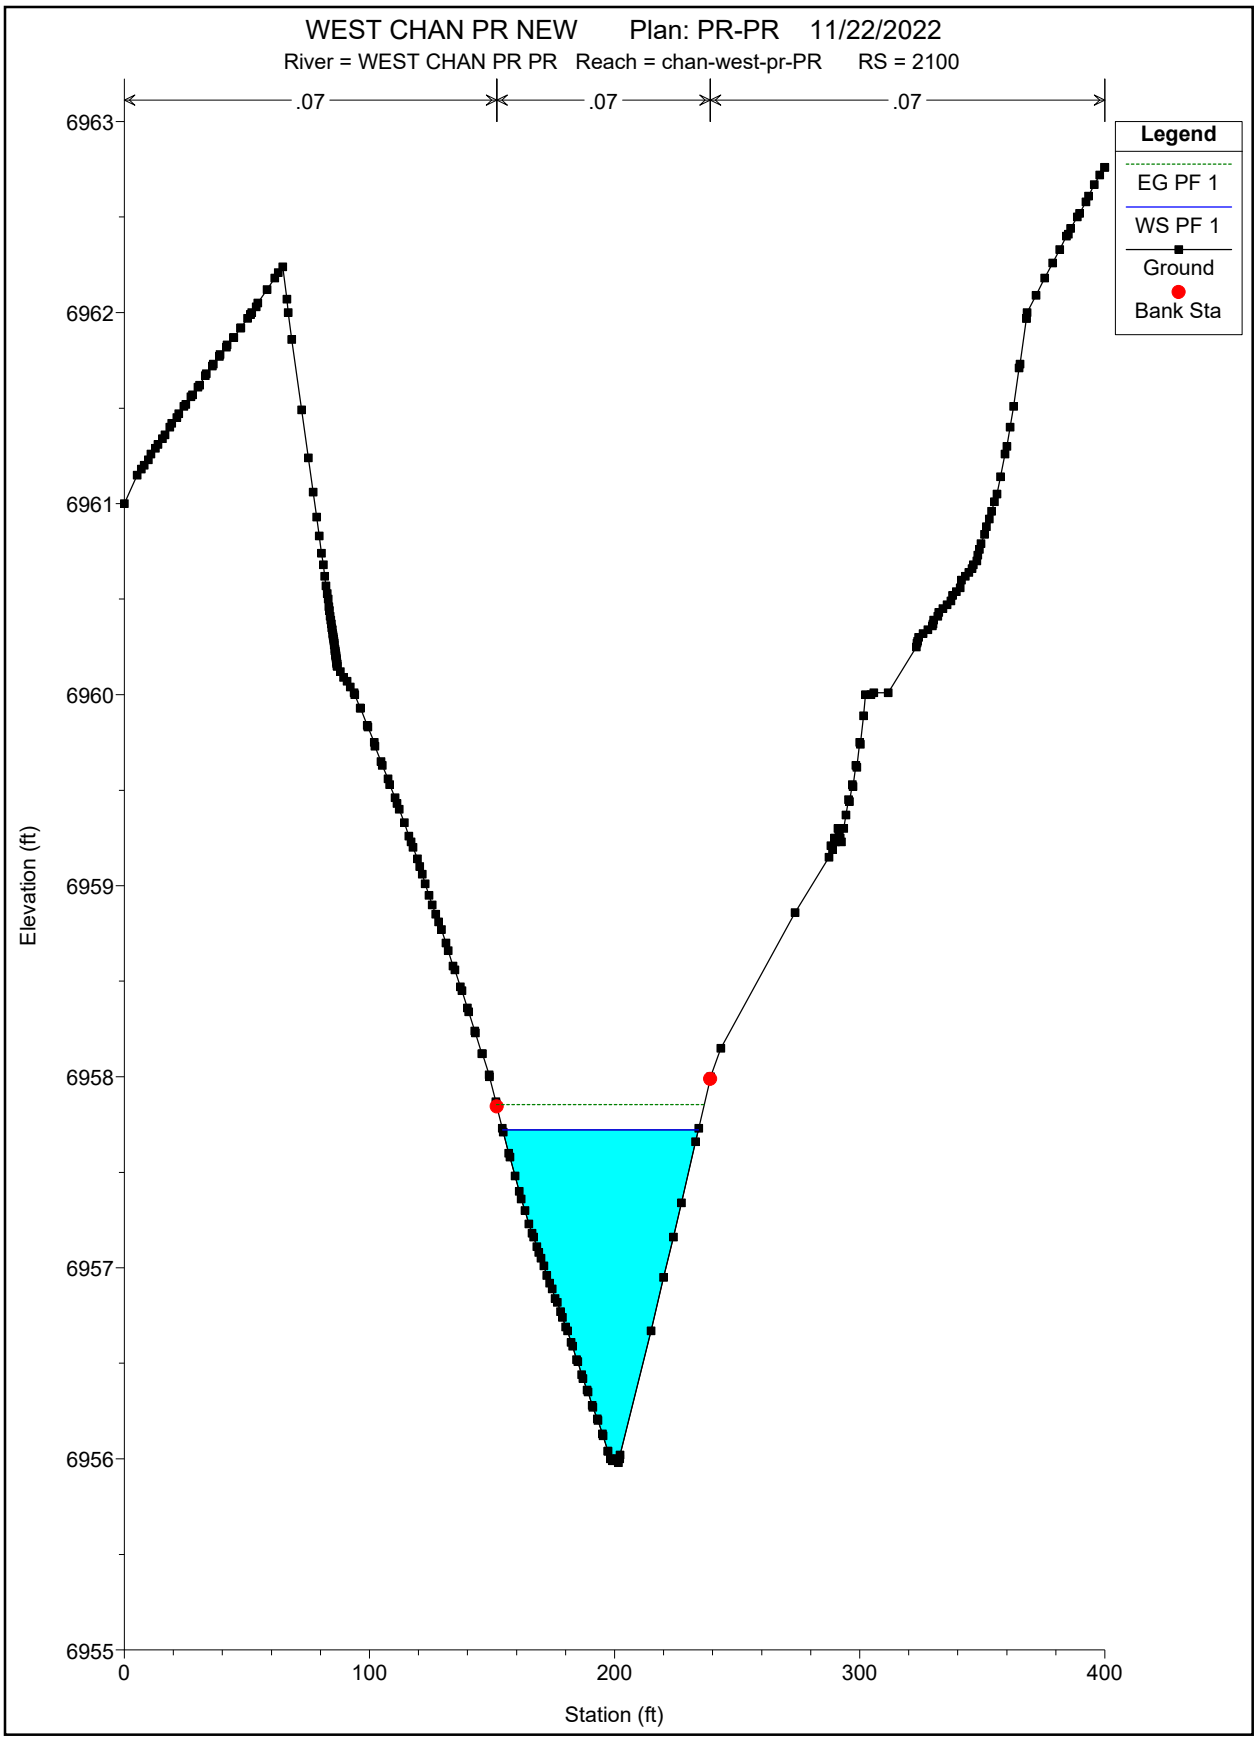
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2100
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6963
6962
6961
6960
6959
6958
6957
6956
6955
0
100
200
300
400
Station (ft)

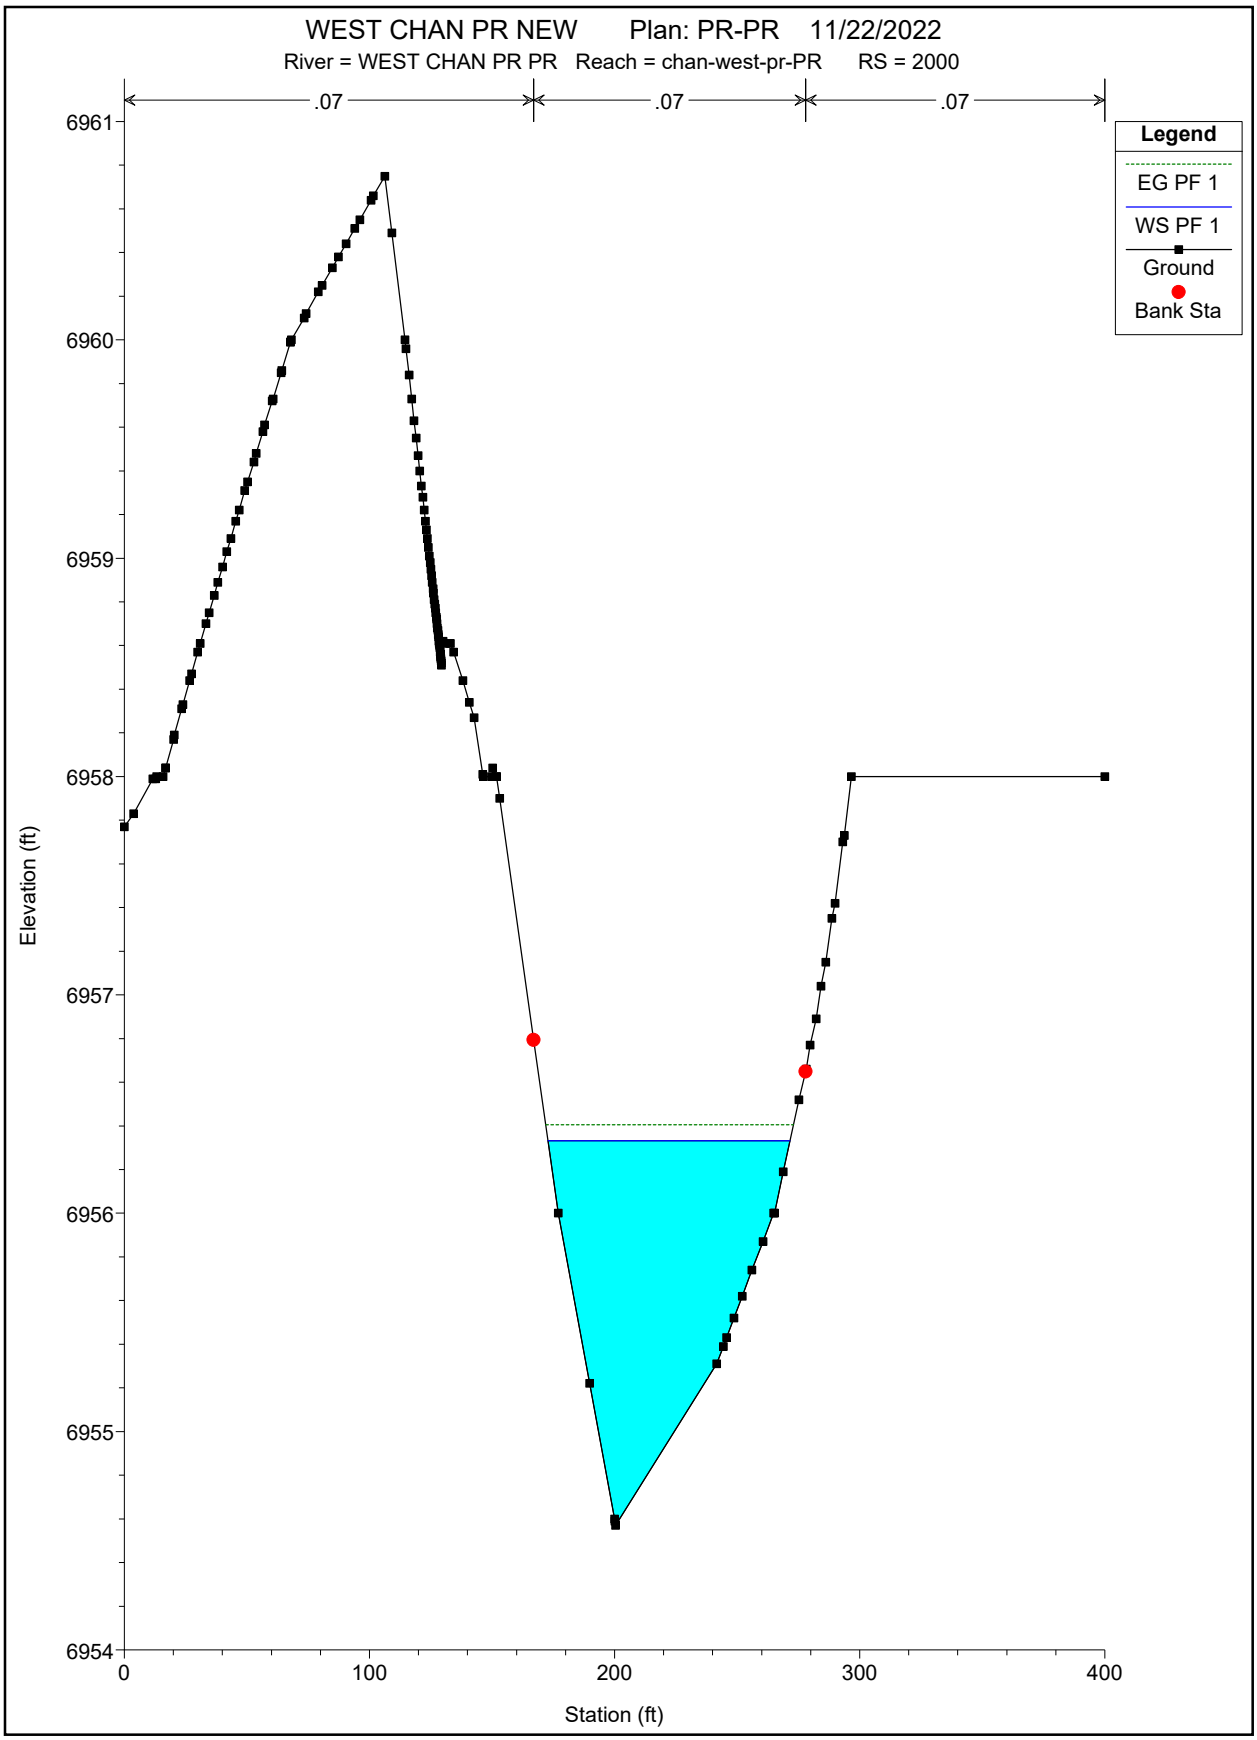
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 2000
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6961
6960
6959
6958
6957
6956
6955
6954
Elevation (ft)
0
100
200
300
400
Station (ft)

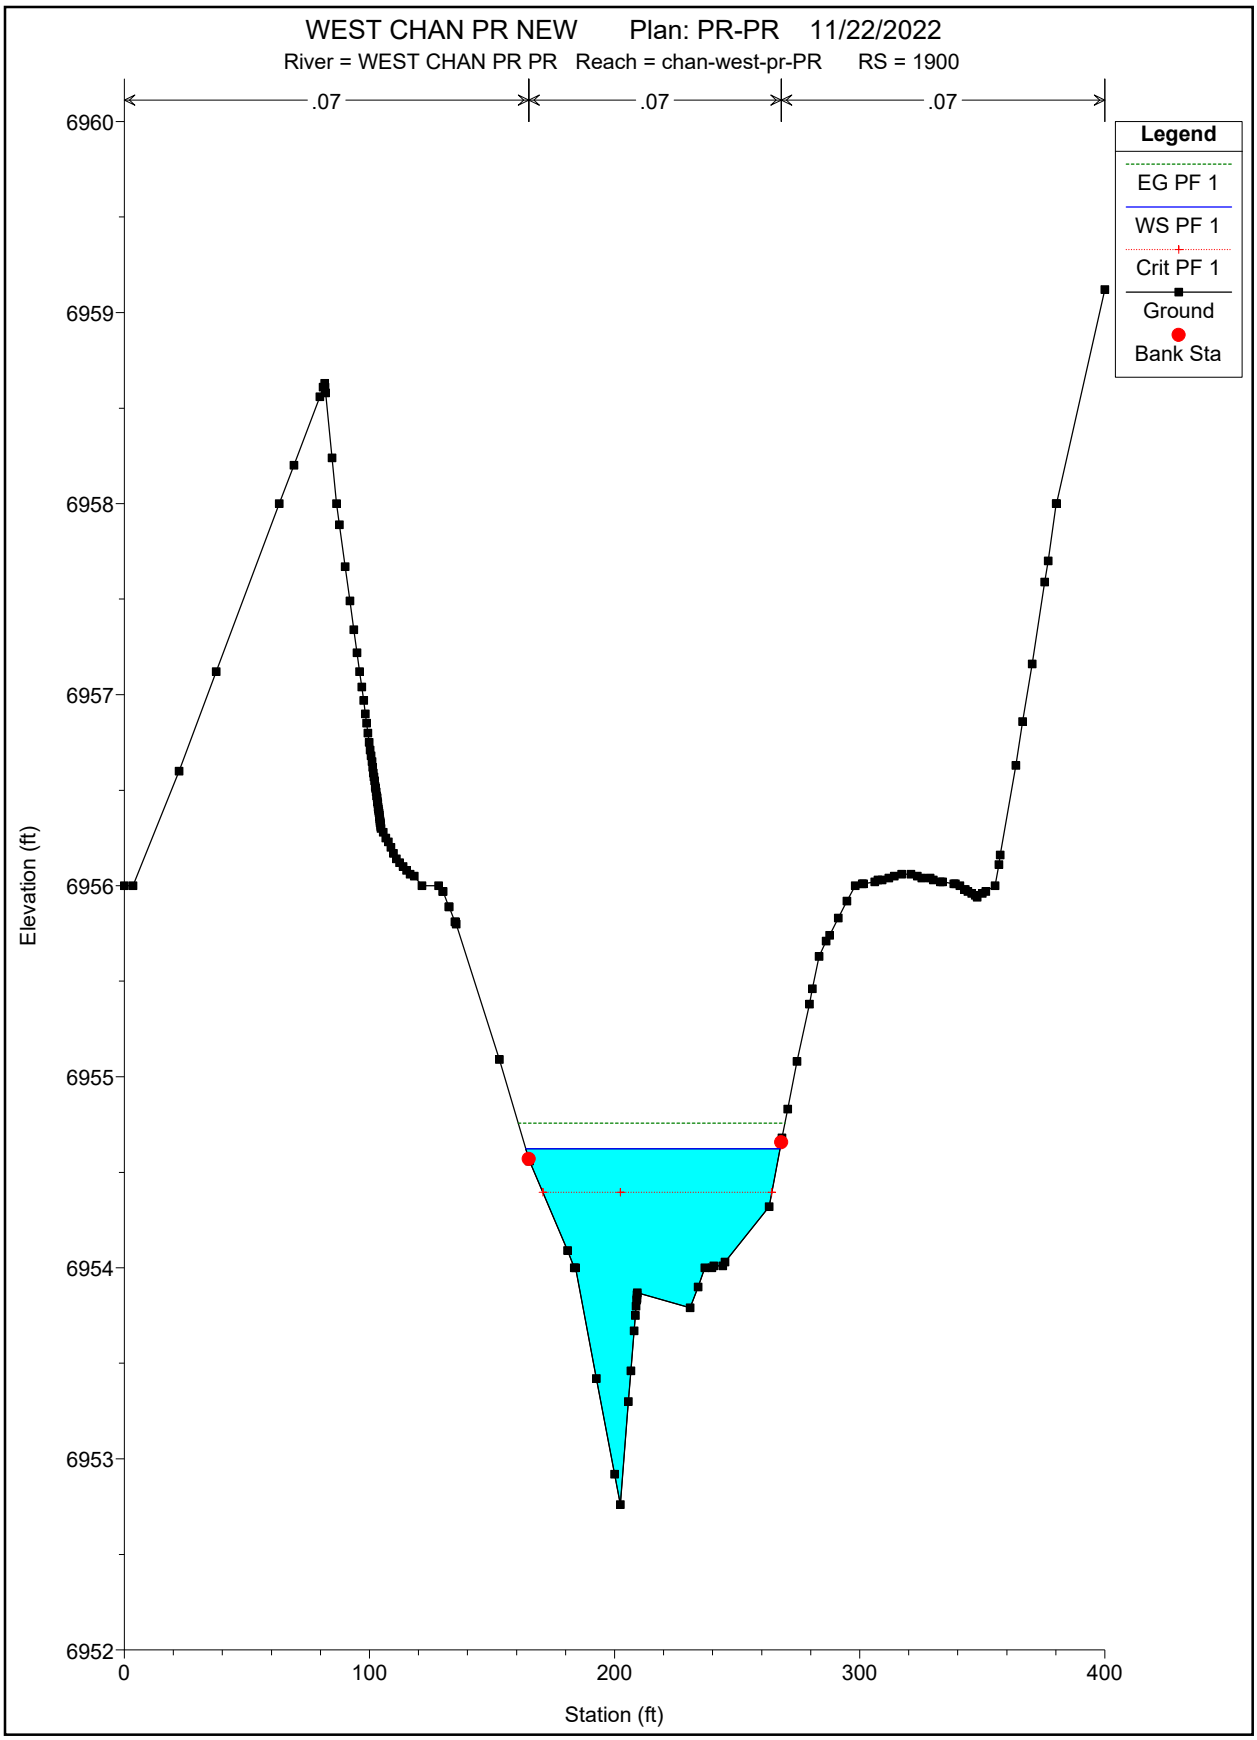
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1900
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6960
6959
6958
6957
6956
6955
6954
6953
6952
0
100
200
300
400
Station (ft)

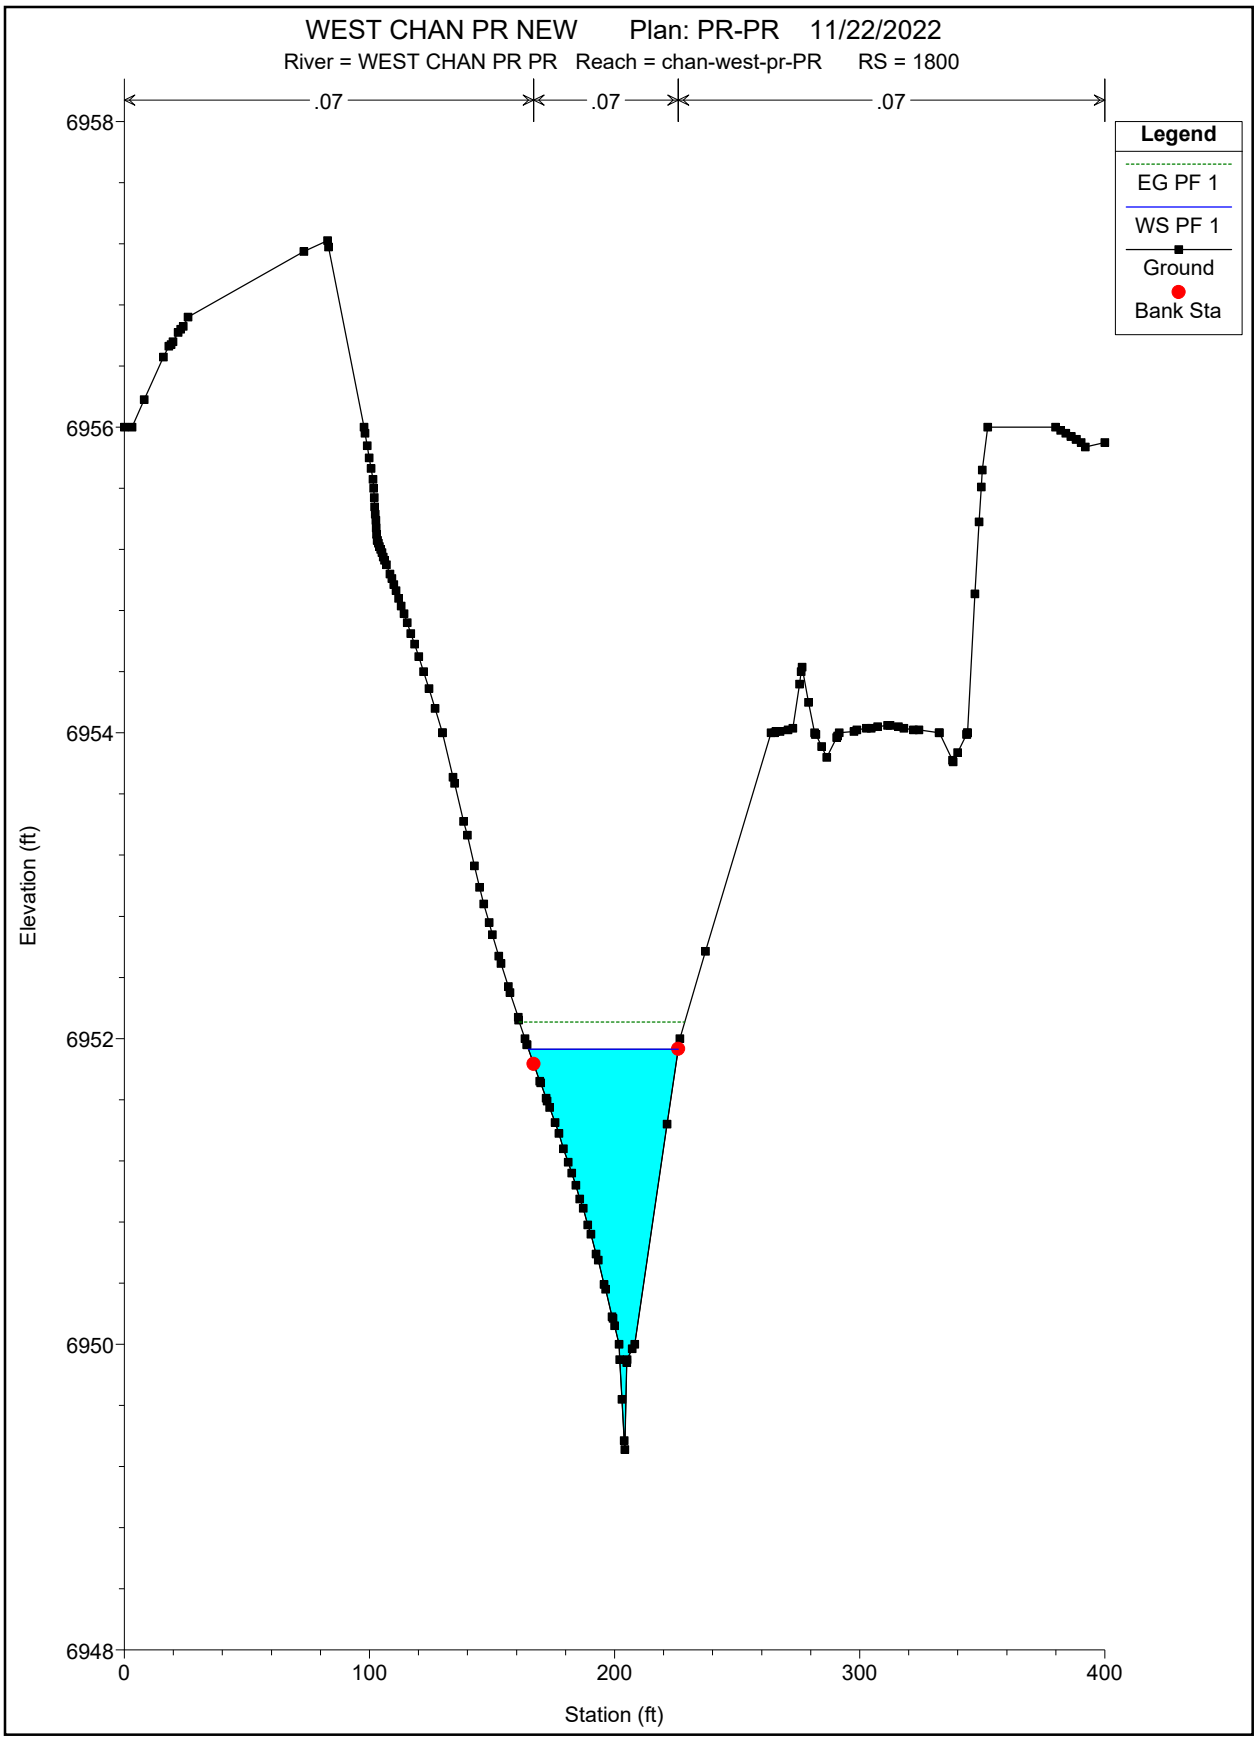
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1800
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6958
6956
6954
6952
6950
6948
Elevation (ft)
0
100
200
300
400
Station (ft)

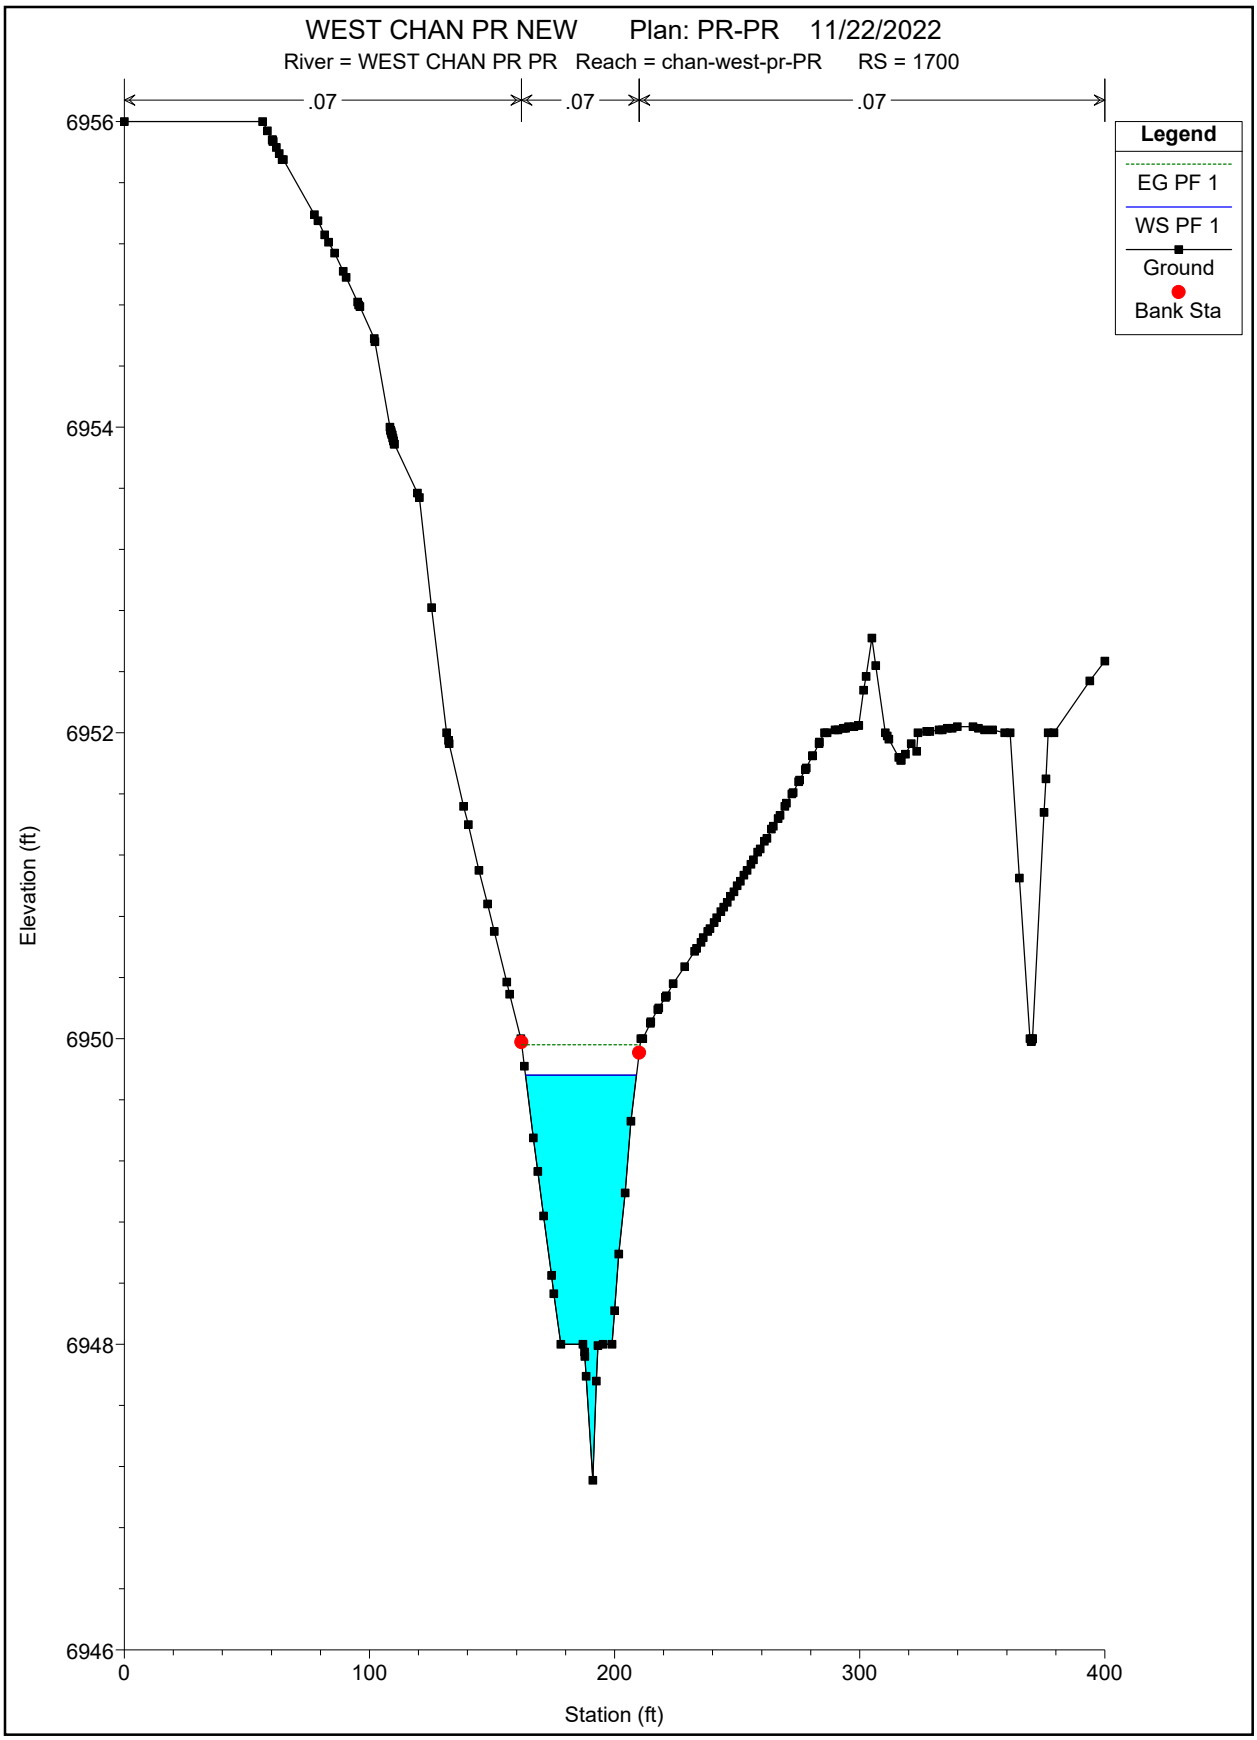
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1700
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6956
6954
6952
6950
6948
6946
Elevation (ft)
0
100
200
300
400
Station (ft)

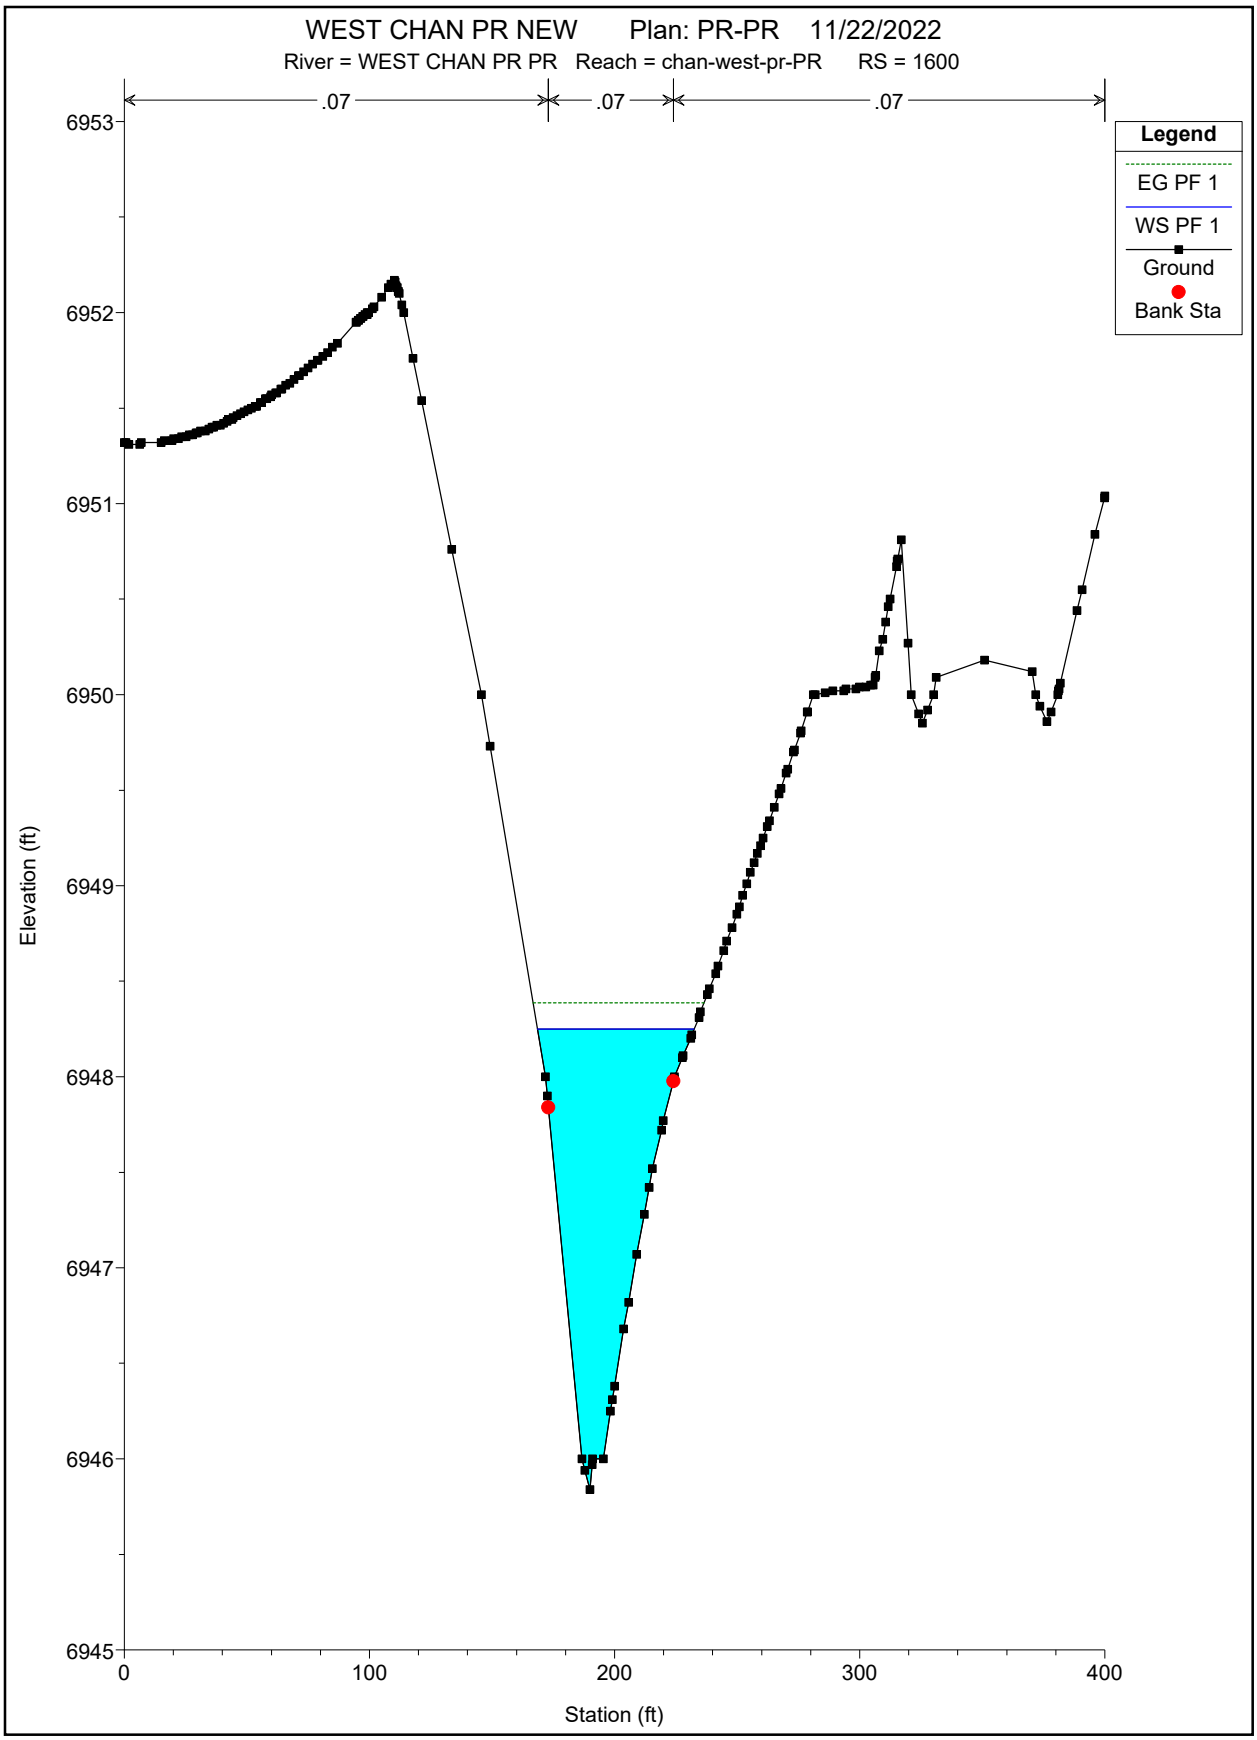
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1600
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6953
6952
6951
6950
6949
6948
6947
6946
6945
Elevation (ft)
0
100
200
300
400
Station (ft)

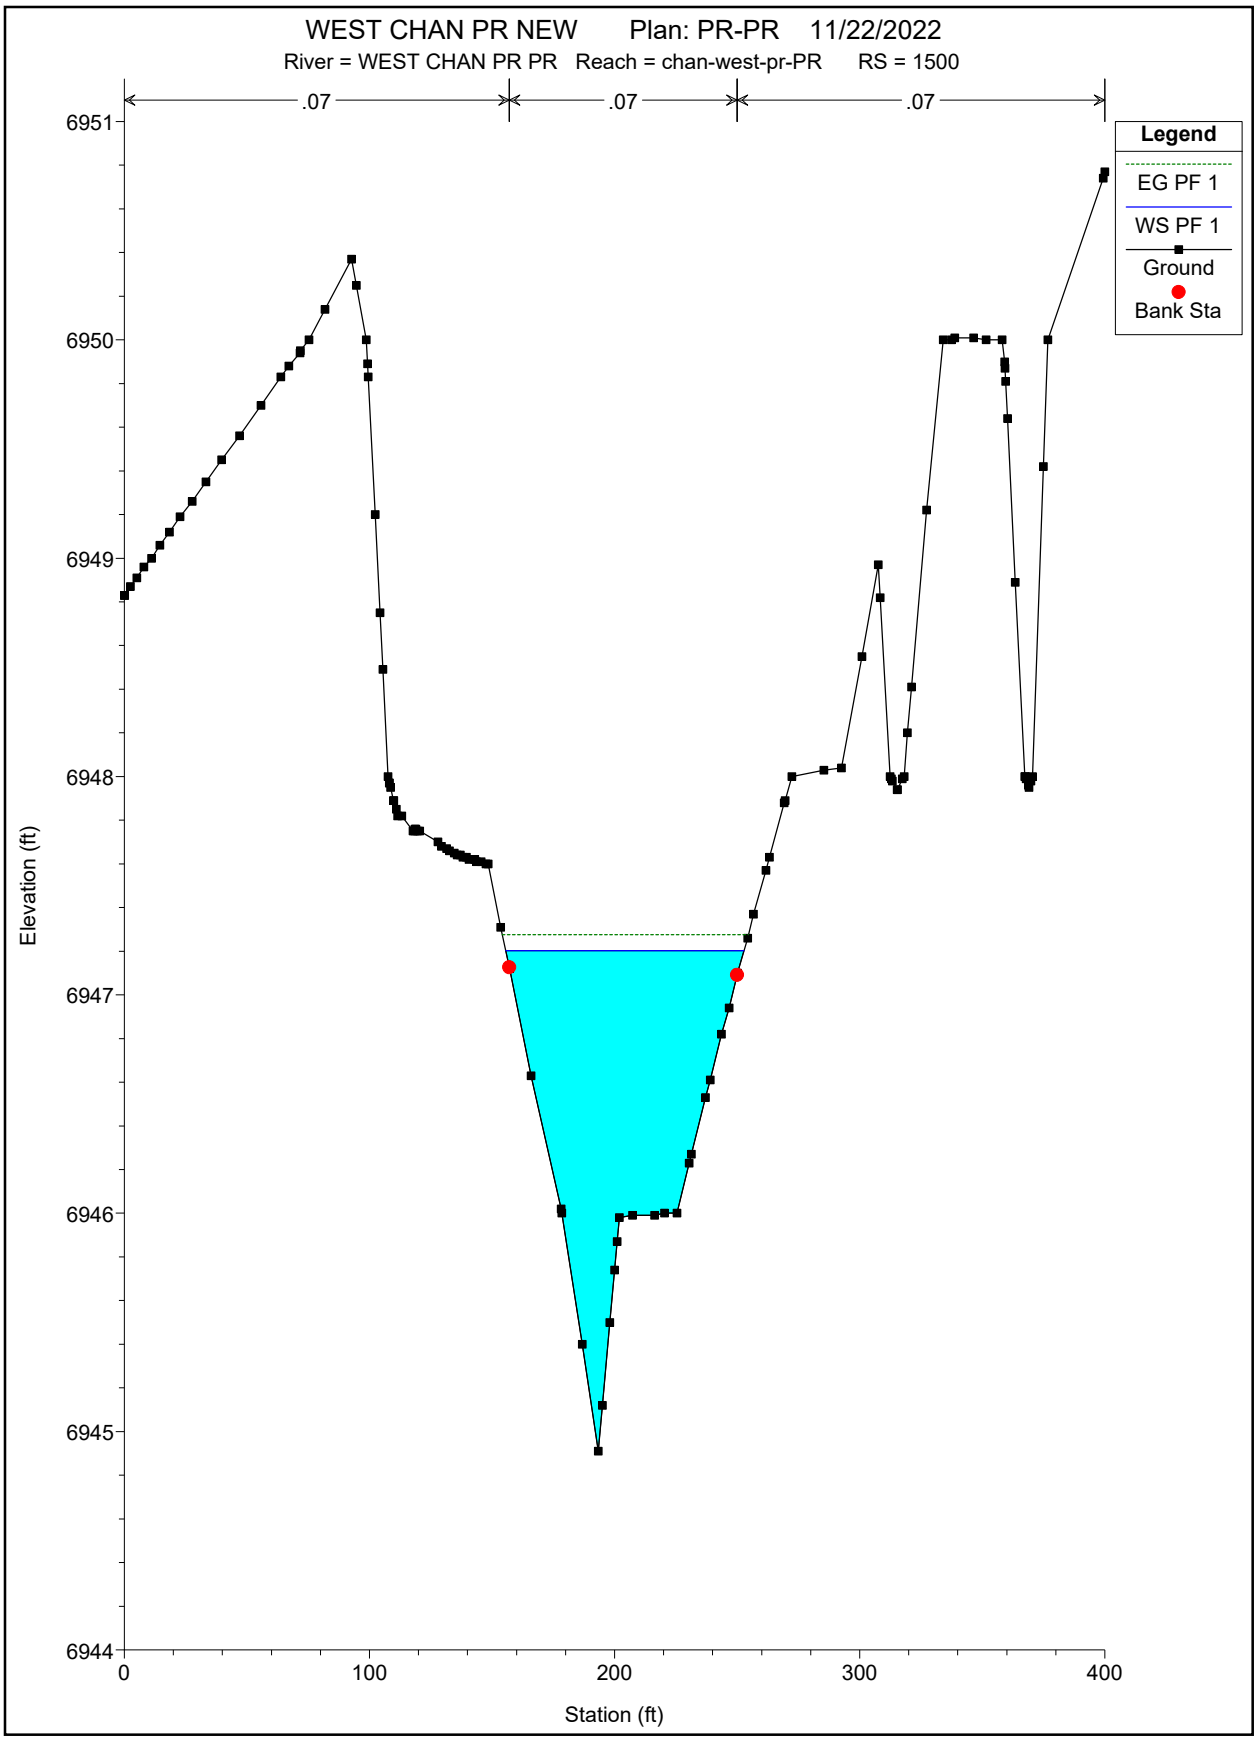
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1500
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6951
6950
6949
6948
6947
6946
6945
6944
Elevation (ft)
0
100
200
300
400
Station (ft)

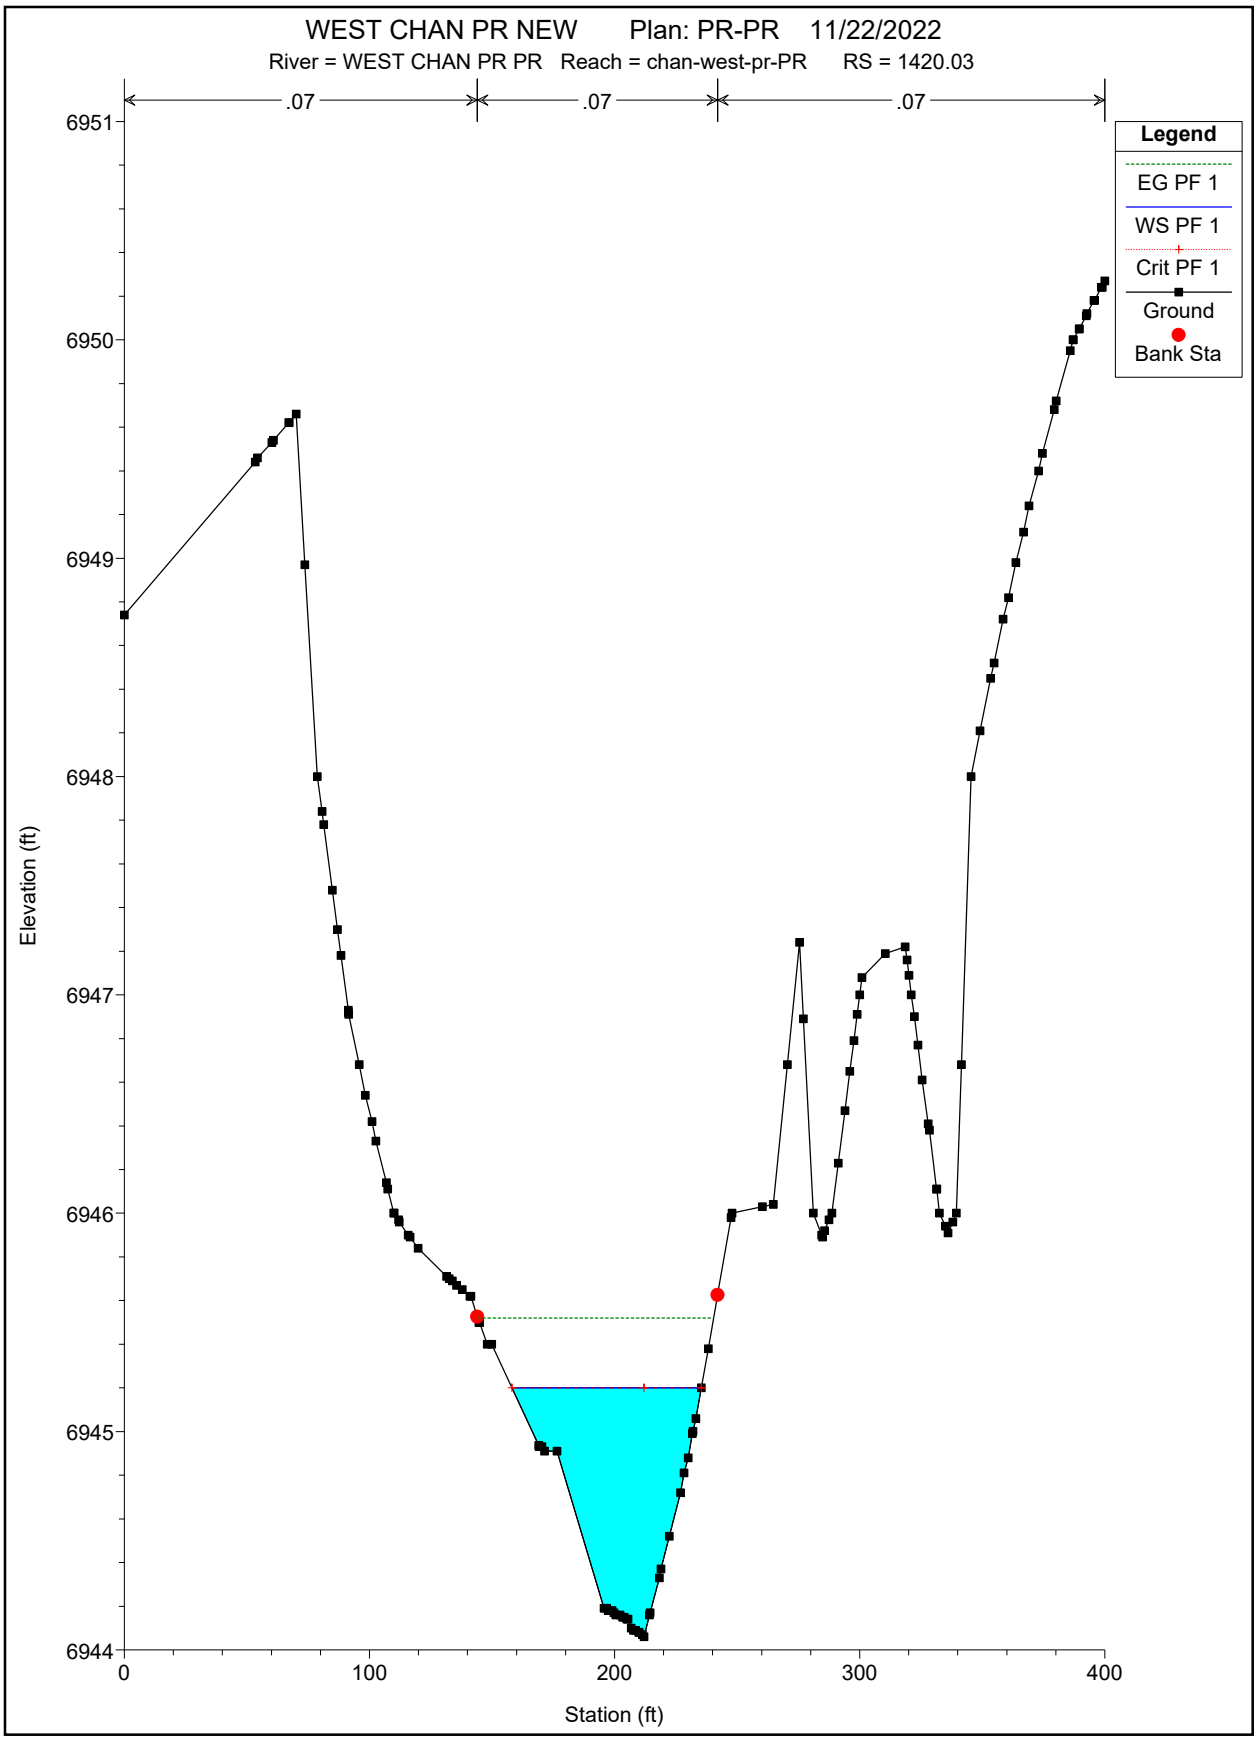
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1420.03
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6951
6950
6949
6948
6947
6946
6945
6944
Elevation (ft)
0
100
200
300
400
Station (ft)

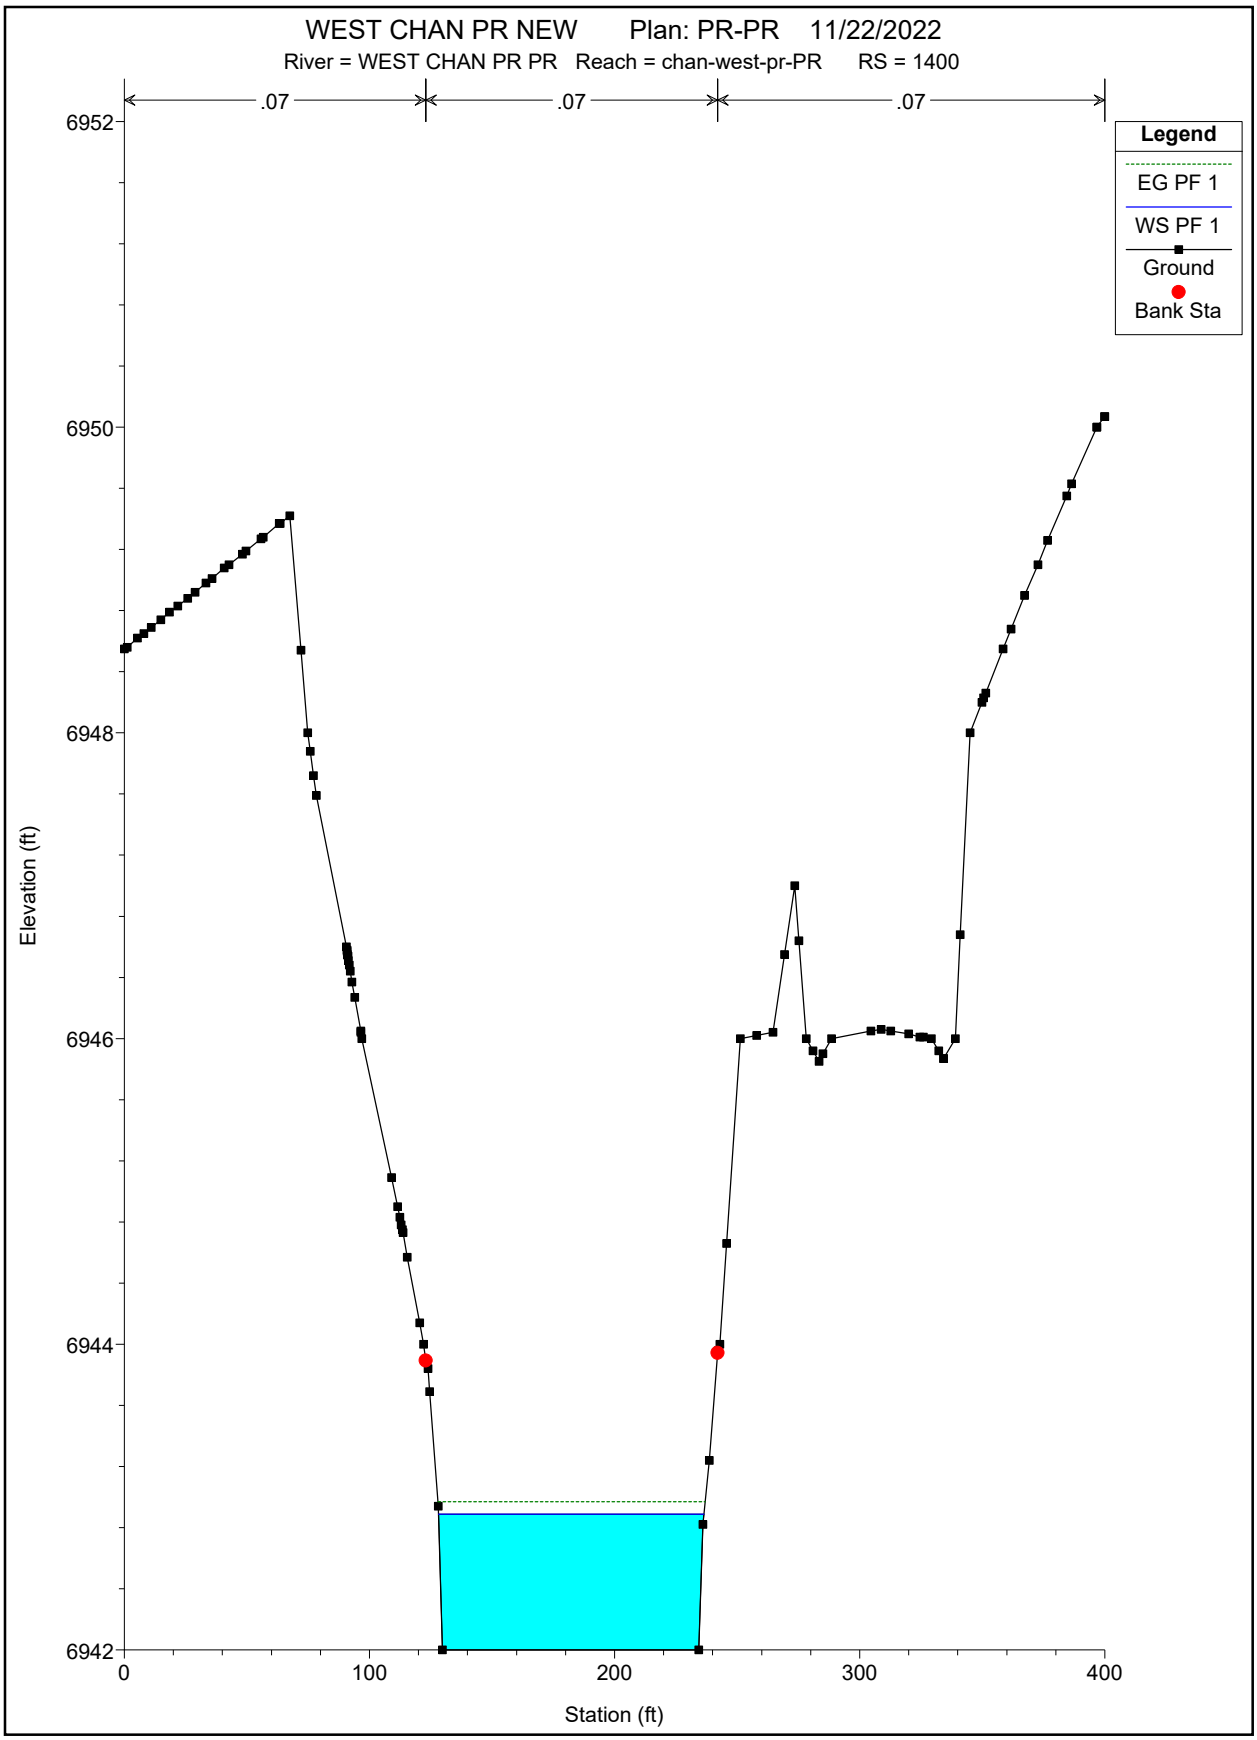
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1400
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6952
6950
6948
6946
6944
6942
Elevation (ft)
0
100
200
300
400
Station (ft)

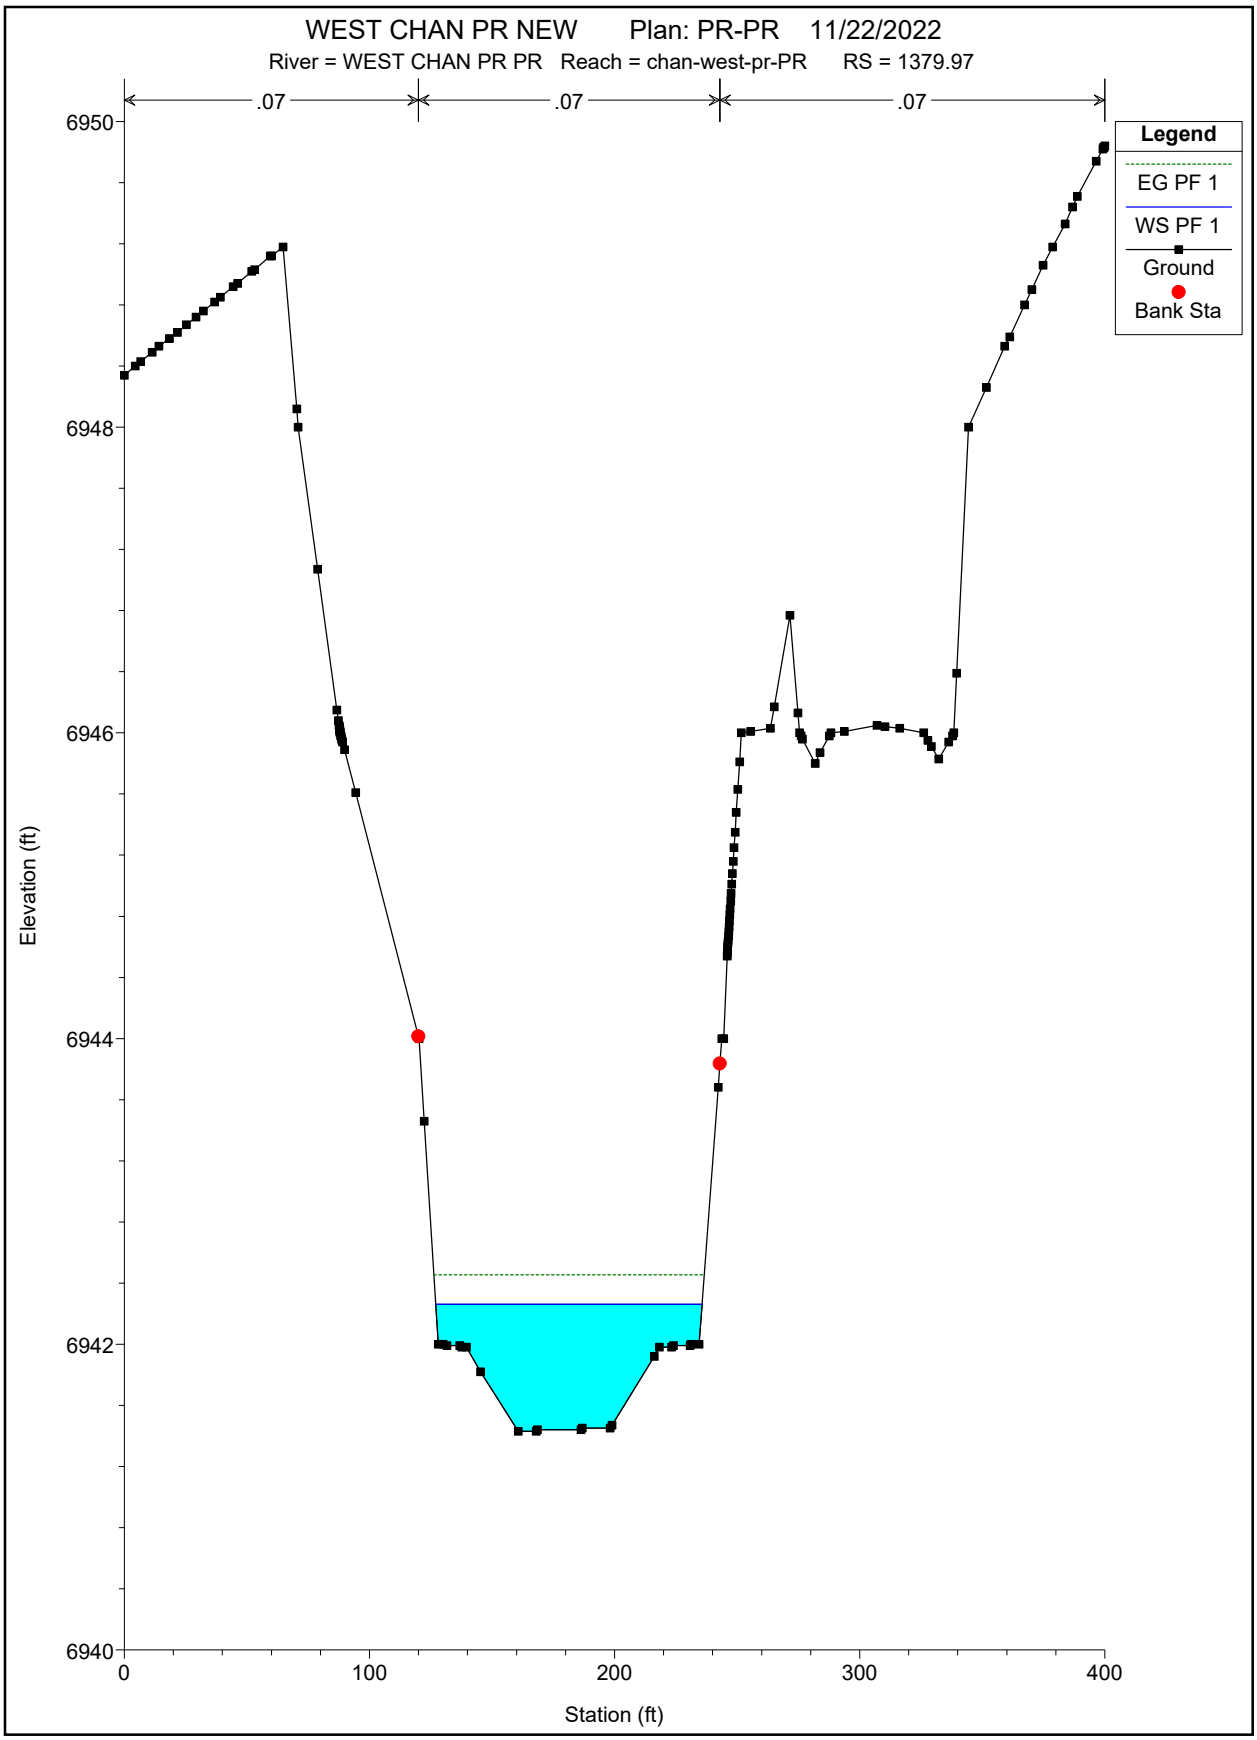
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1379.97
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6950
6948
6946
6944
6942
6940
Elevation (ft)
0
100
200
300
400
Station (ft)

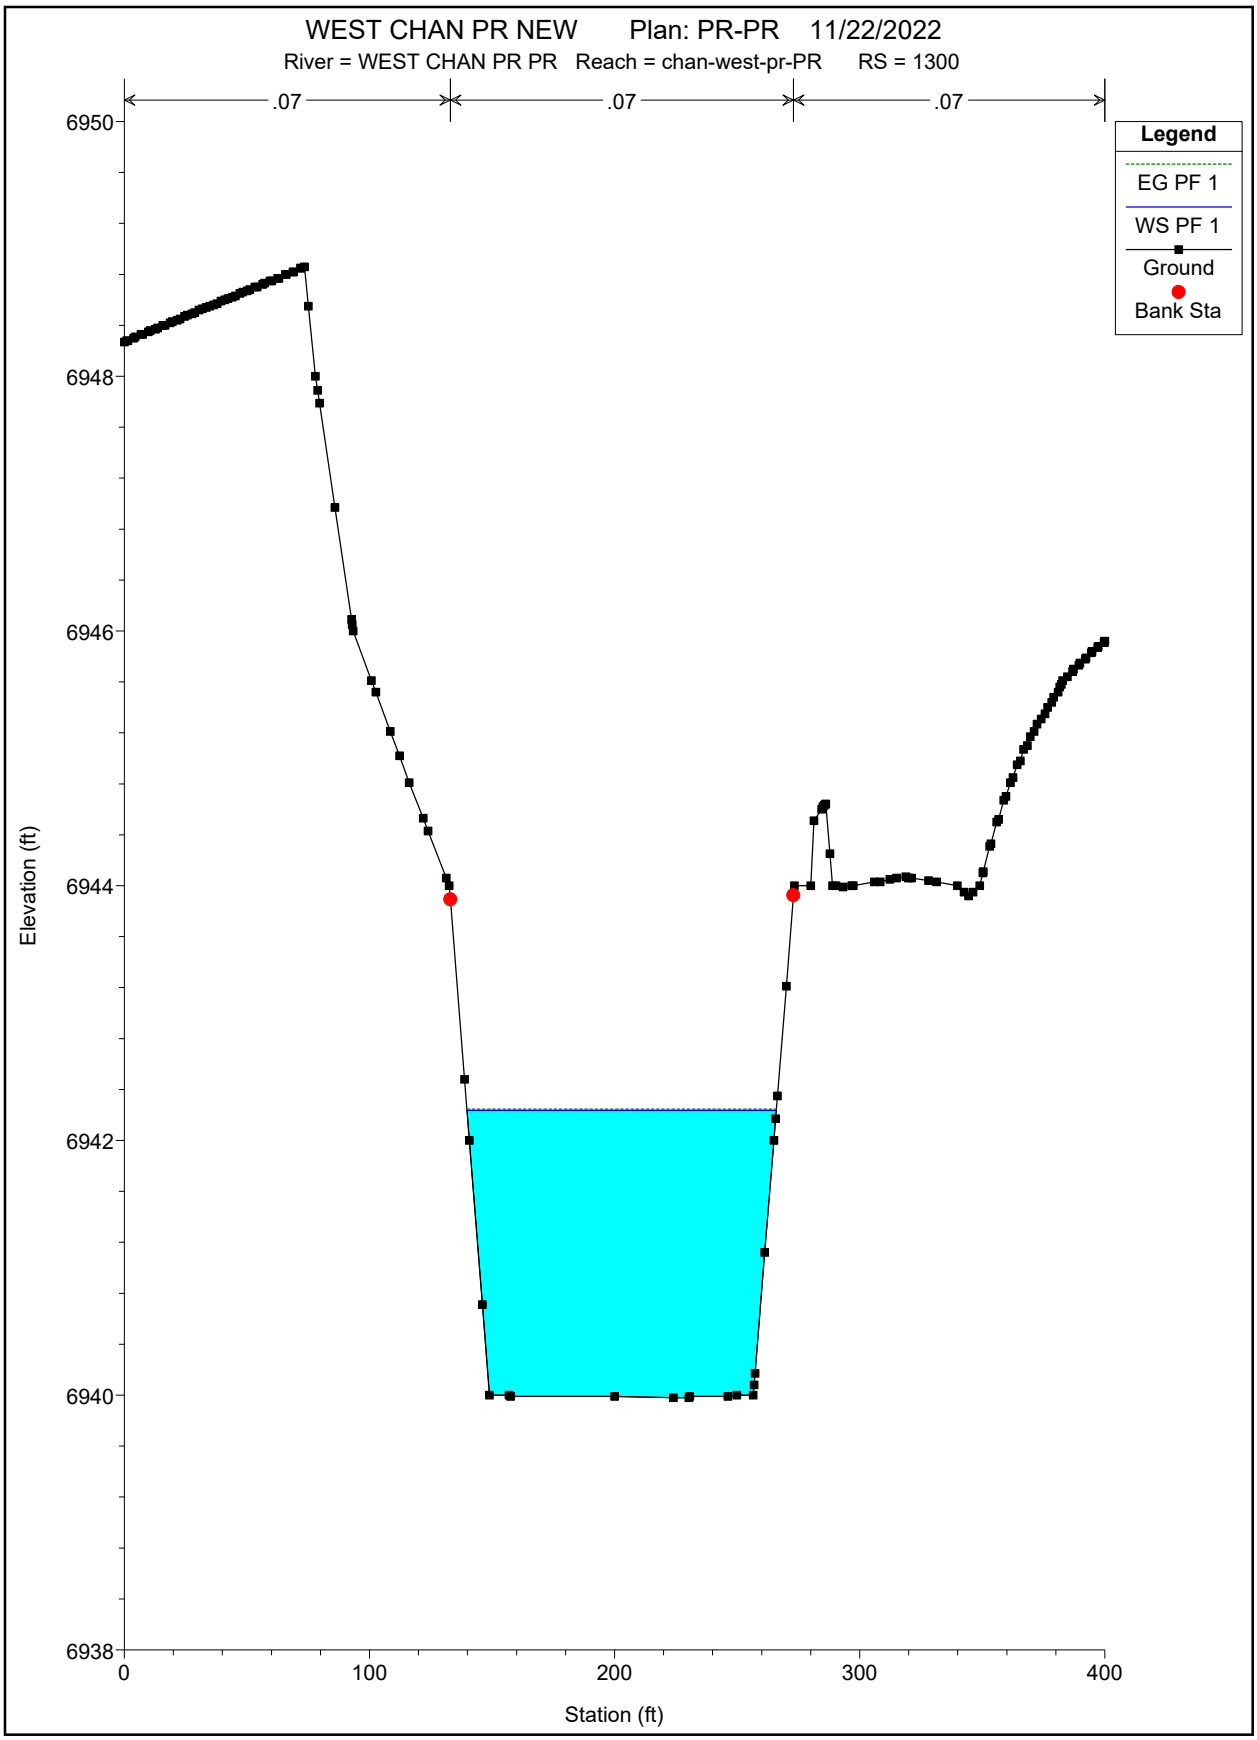
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1300
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6950
6948
6946
6944
6942
6940
6938
Elevation (ft)
0
100
200
300
400
Station (ft)

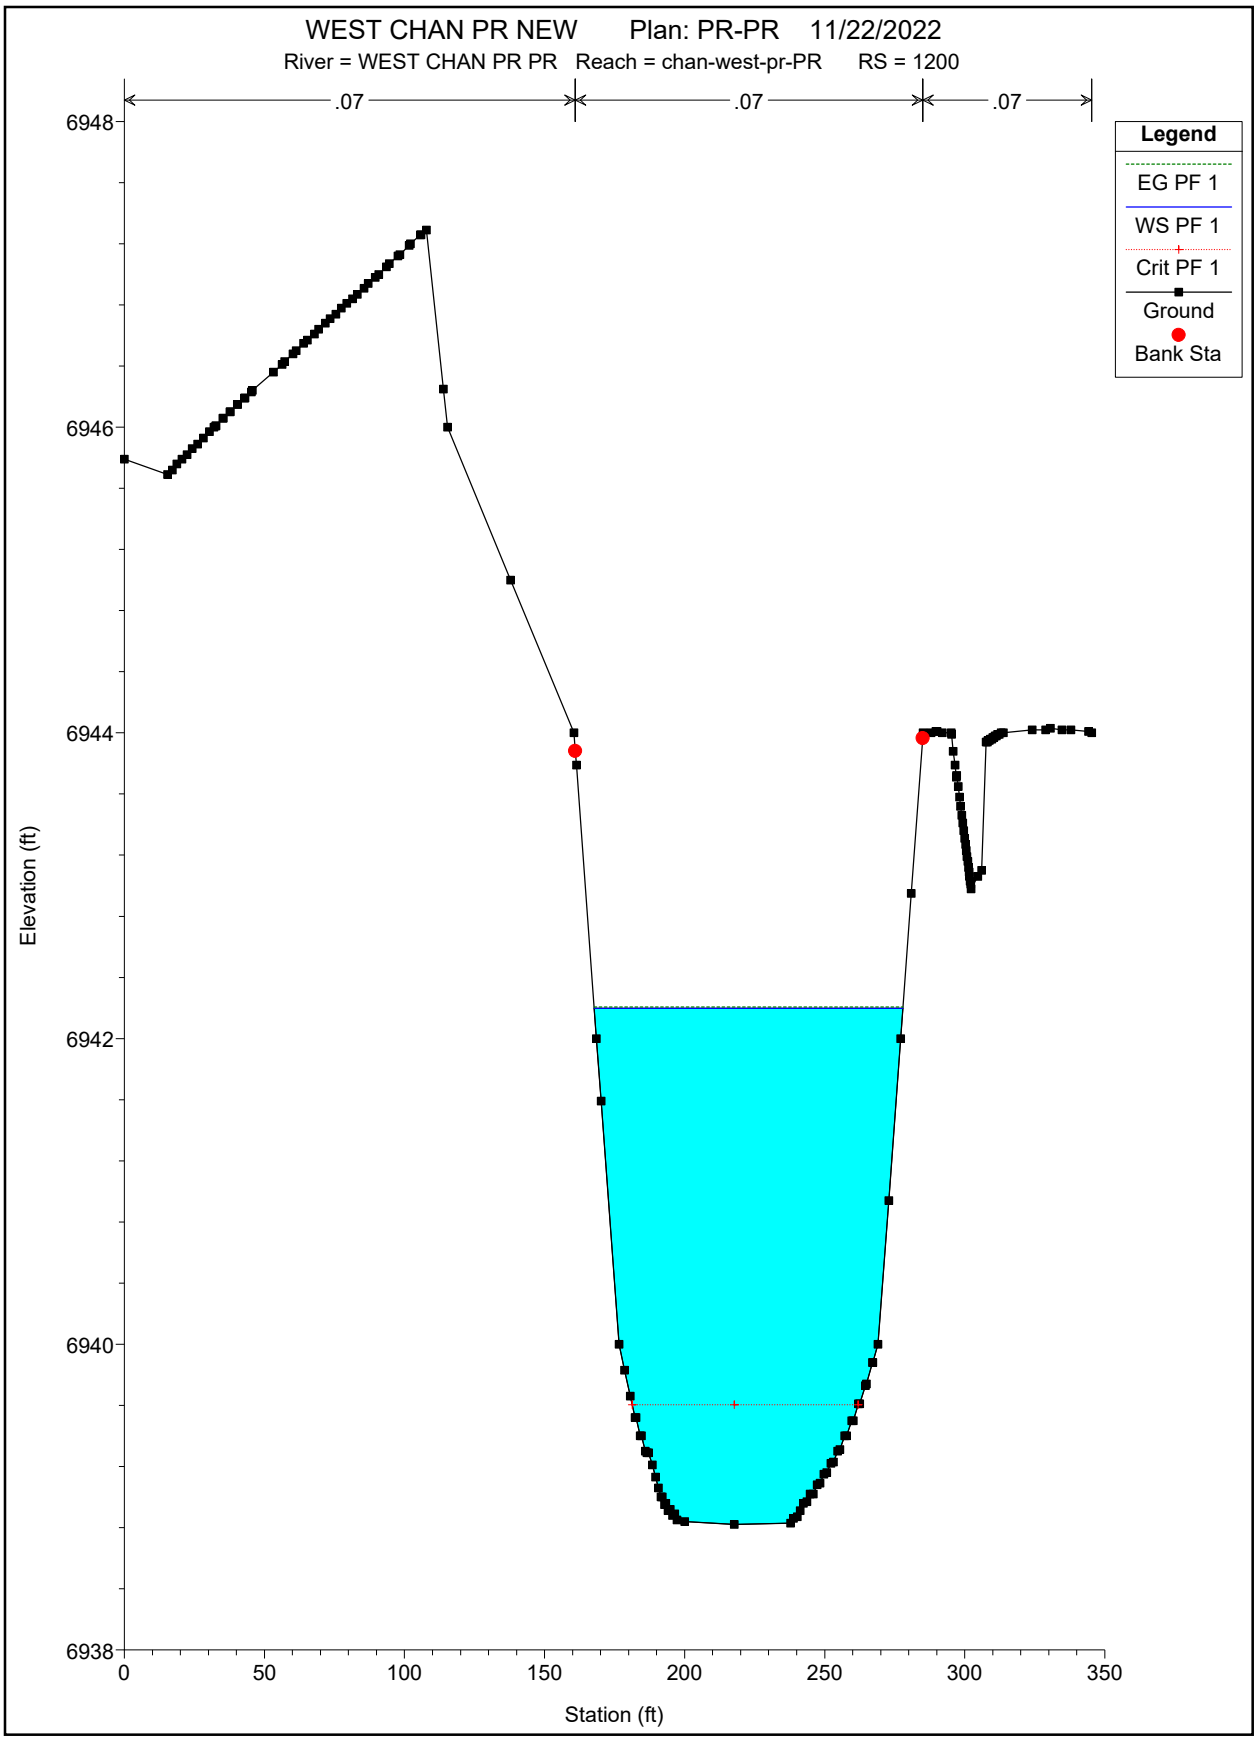
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1200
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6948
6946
6944
6942
6940
6938
0
50
100
150
200
250
300
350
Station (ft)

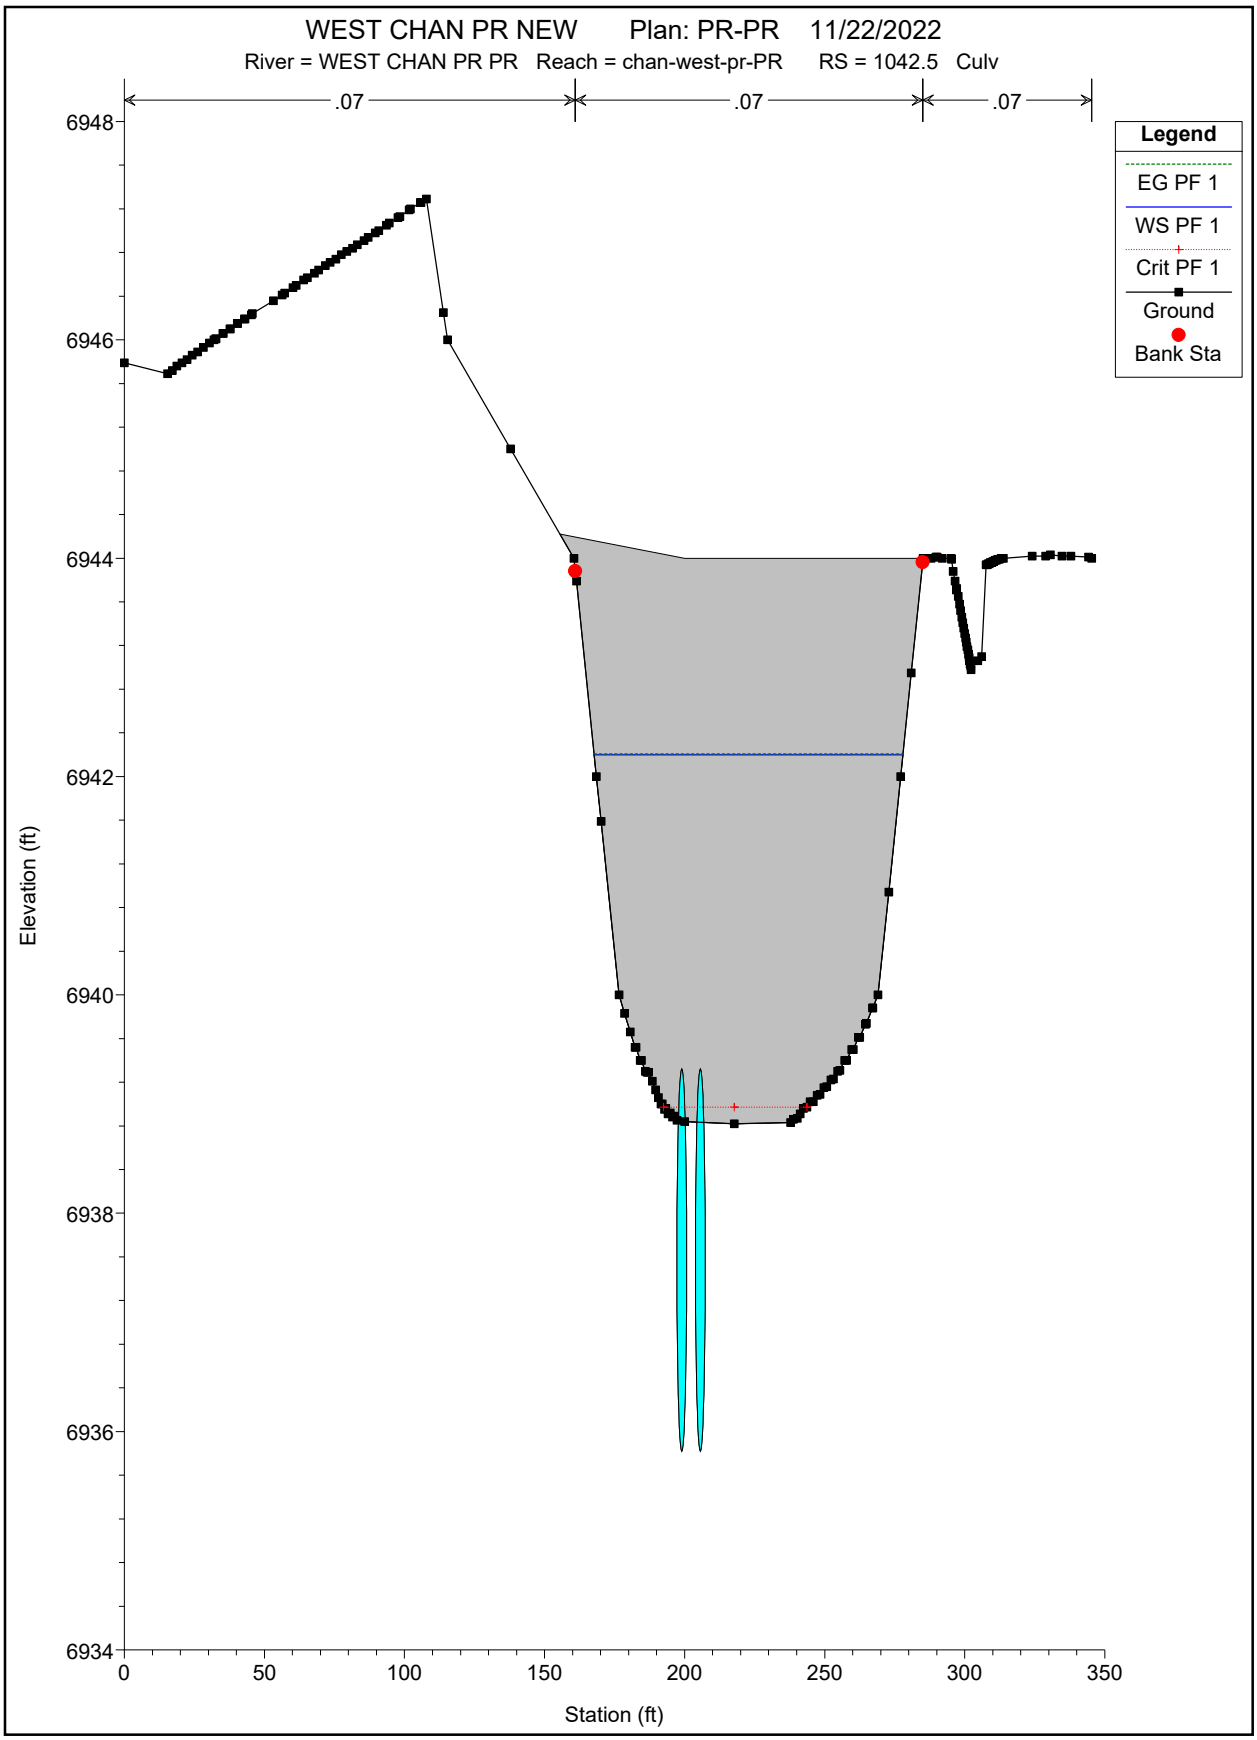
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 1042.5 Culv
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6948
6946
6944
6942
6940
6938
6936
6934
0
50
100
150
200
250
300
350
Station (ft)

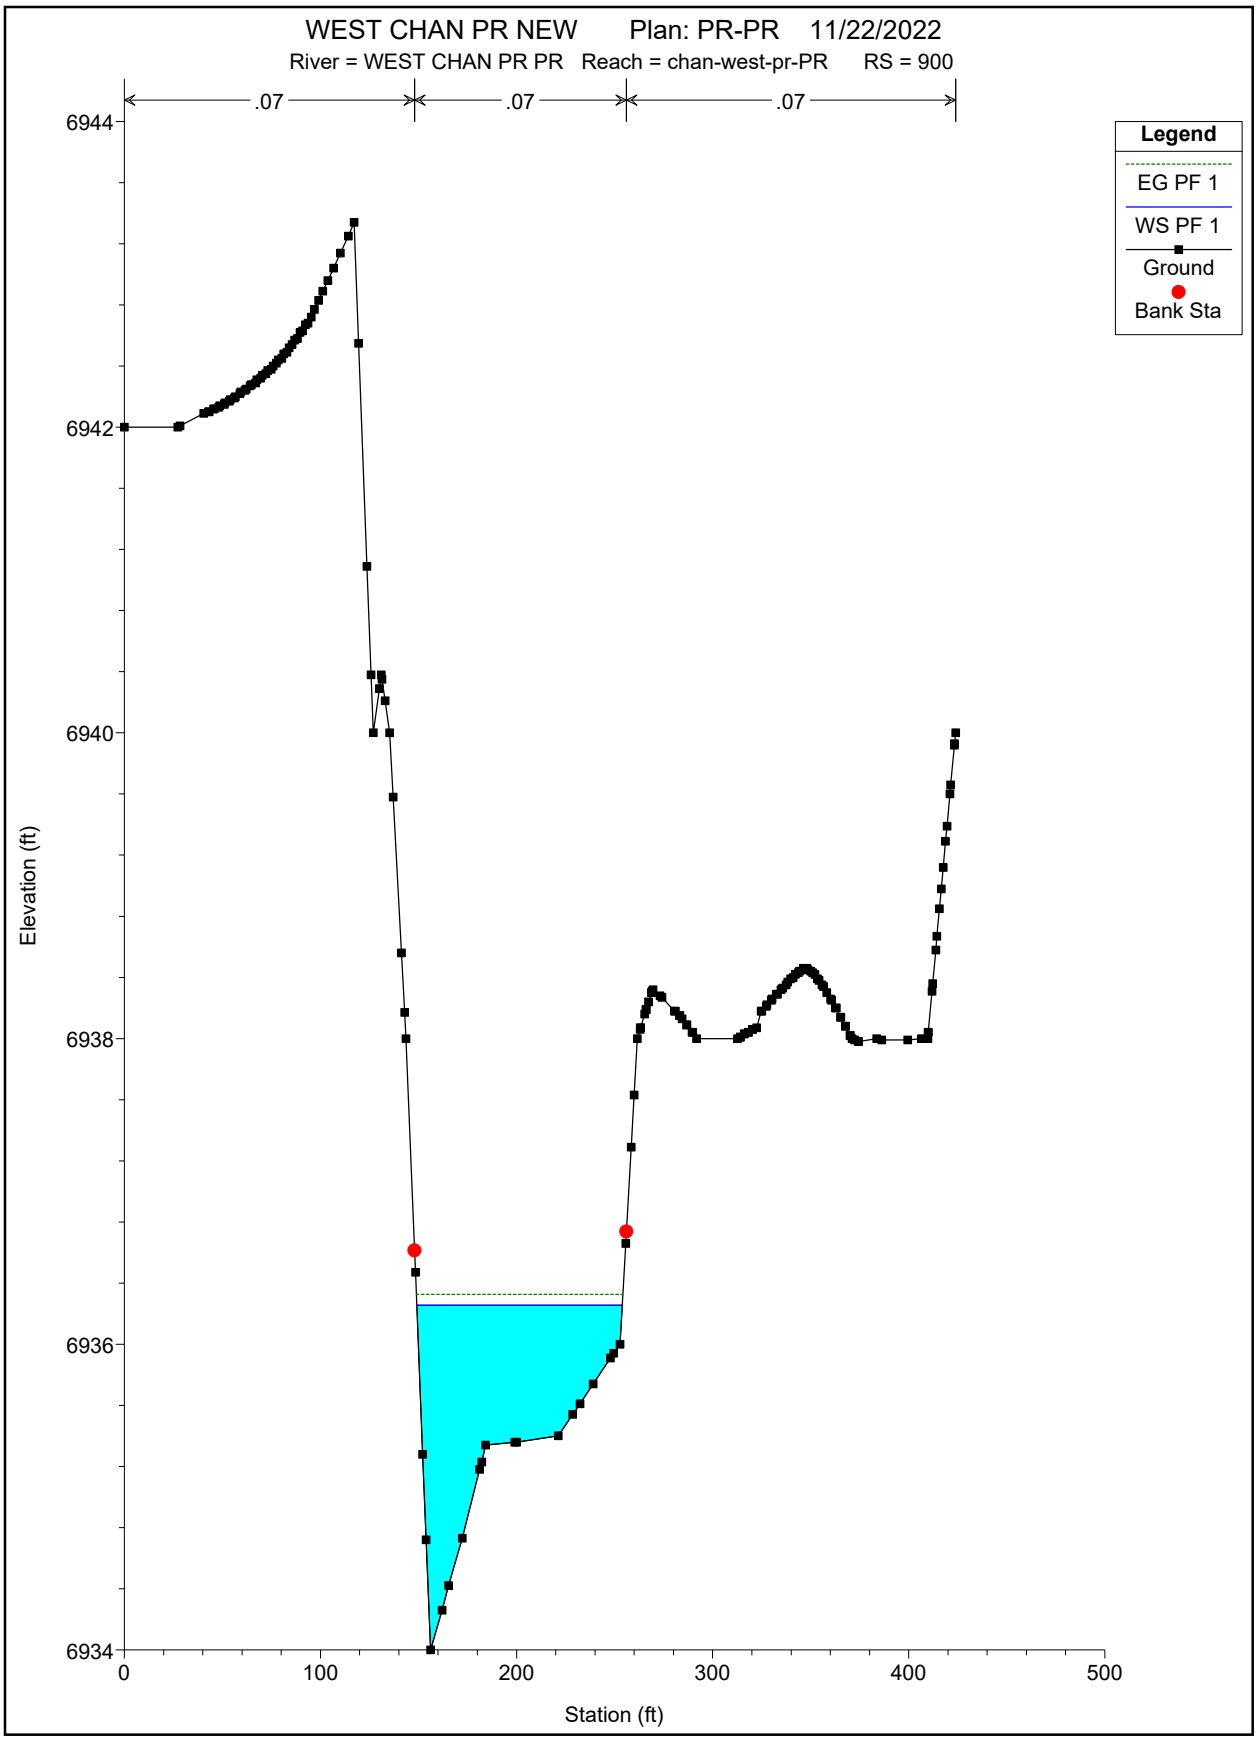
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 900
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6944
6942
6940
6938
6936
6934
Elevation (ft)
0
100
200
300
400
500
Station (ft)

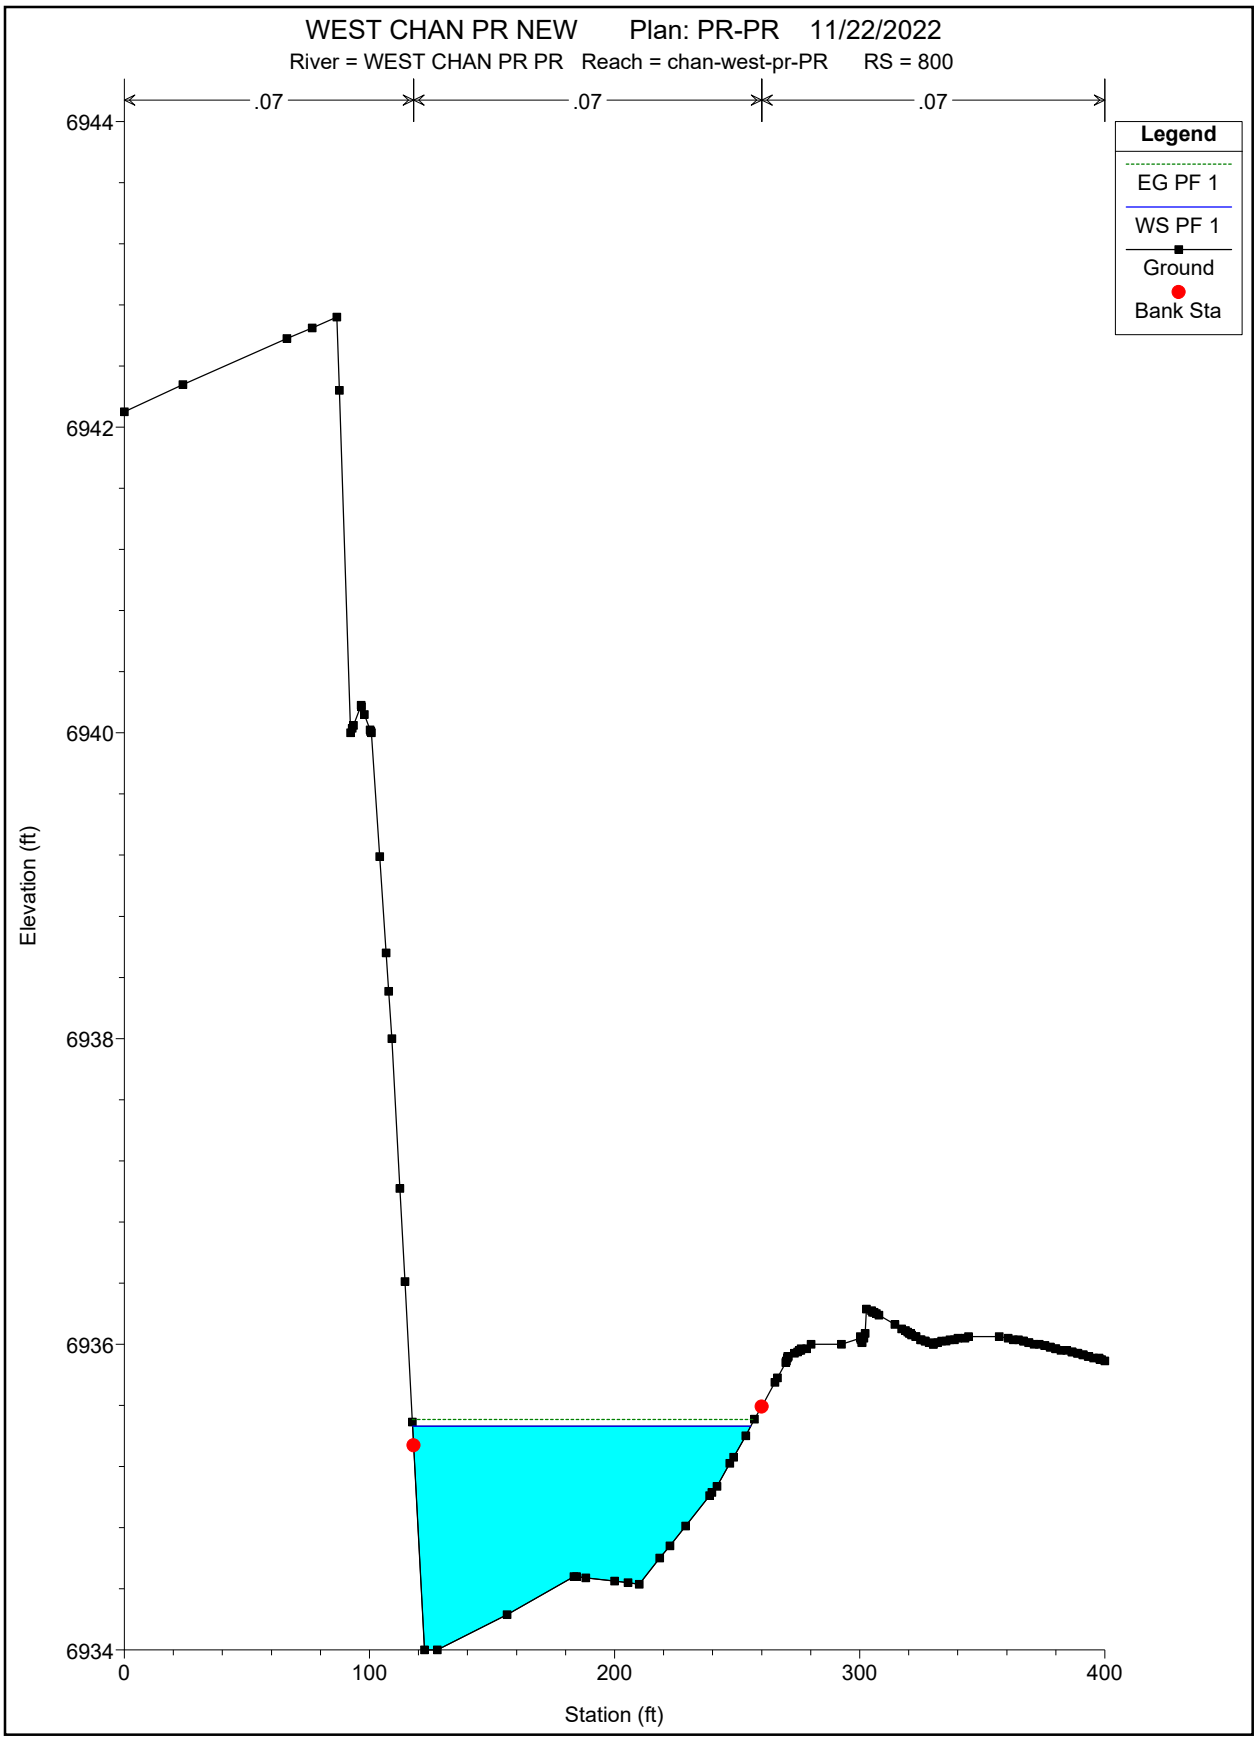
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 800
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6944
6942
6940
6938
6936
6934
Elevation (ft)
0
100
200
300
400
Station (ft)

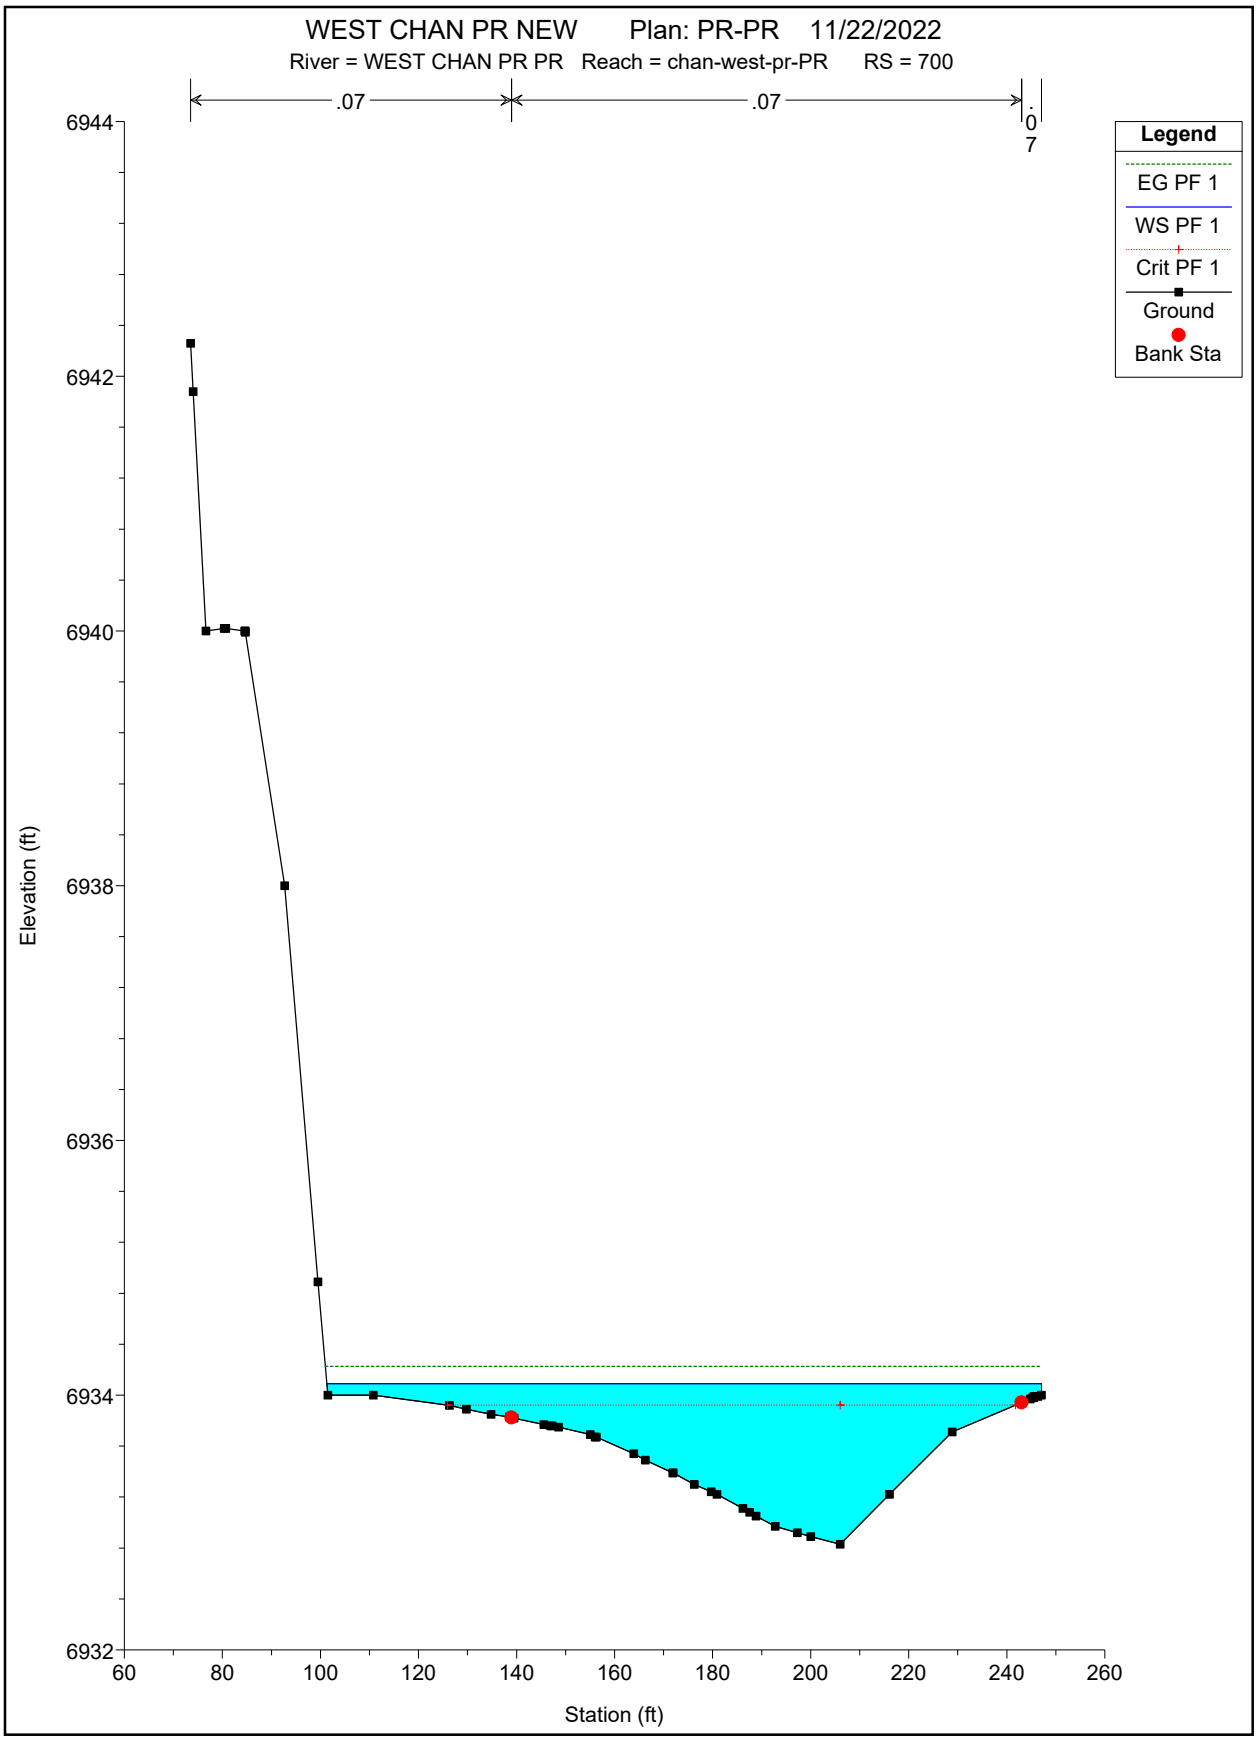
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 700
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6944
6942
6940
6938
6936
6934
6932
60
80
100
120
140
160
180
200
220
240
260
Station (ft)

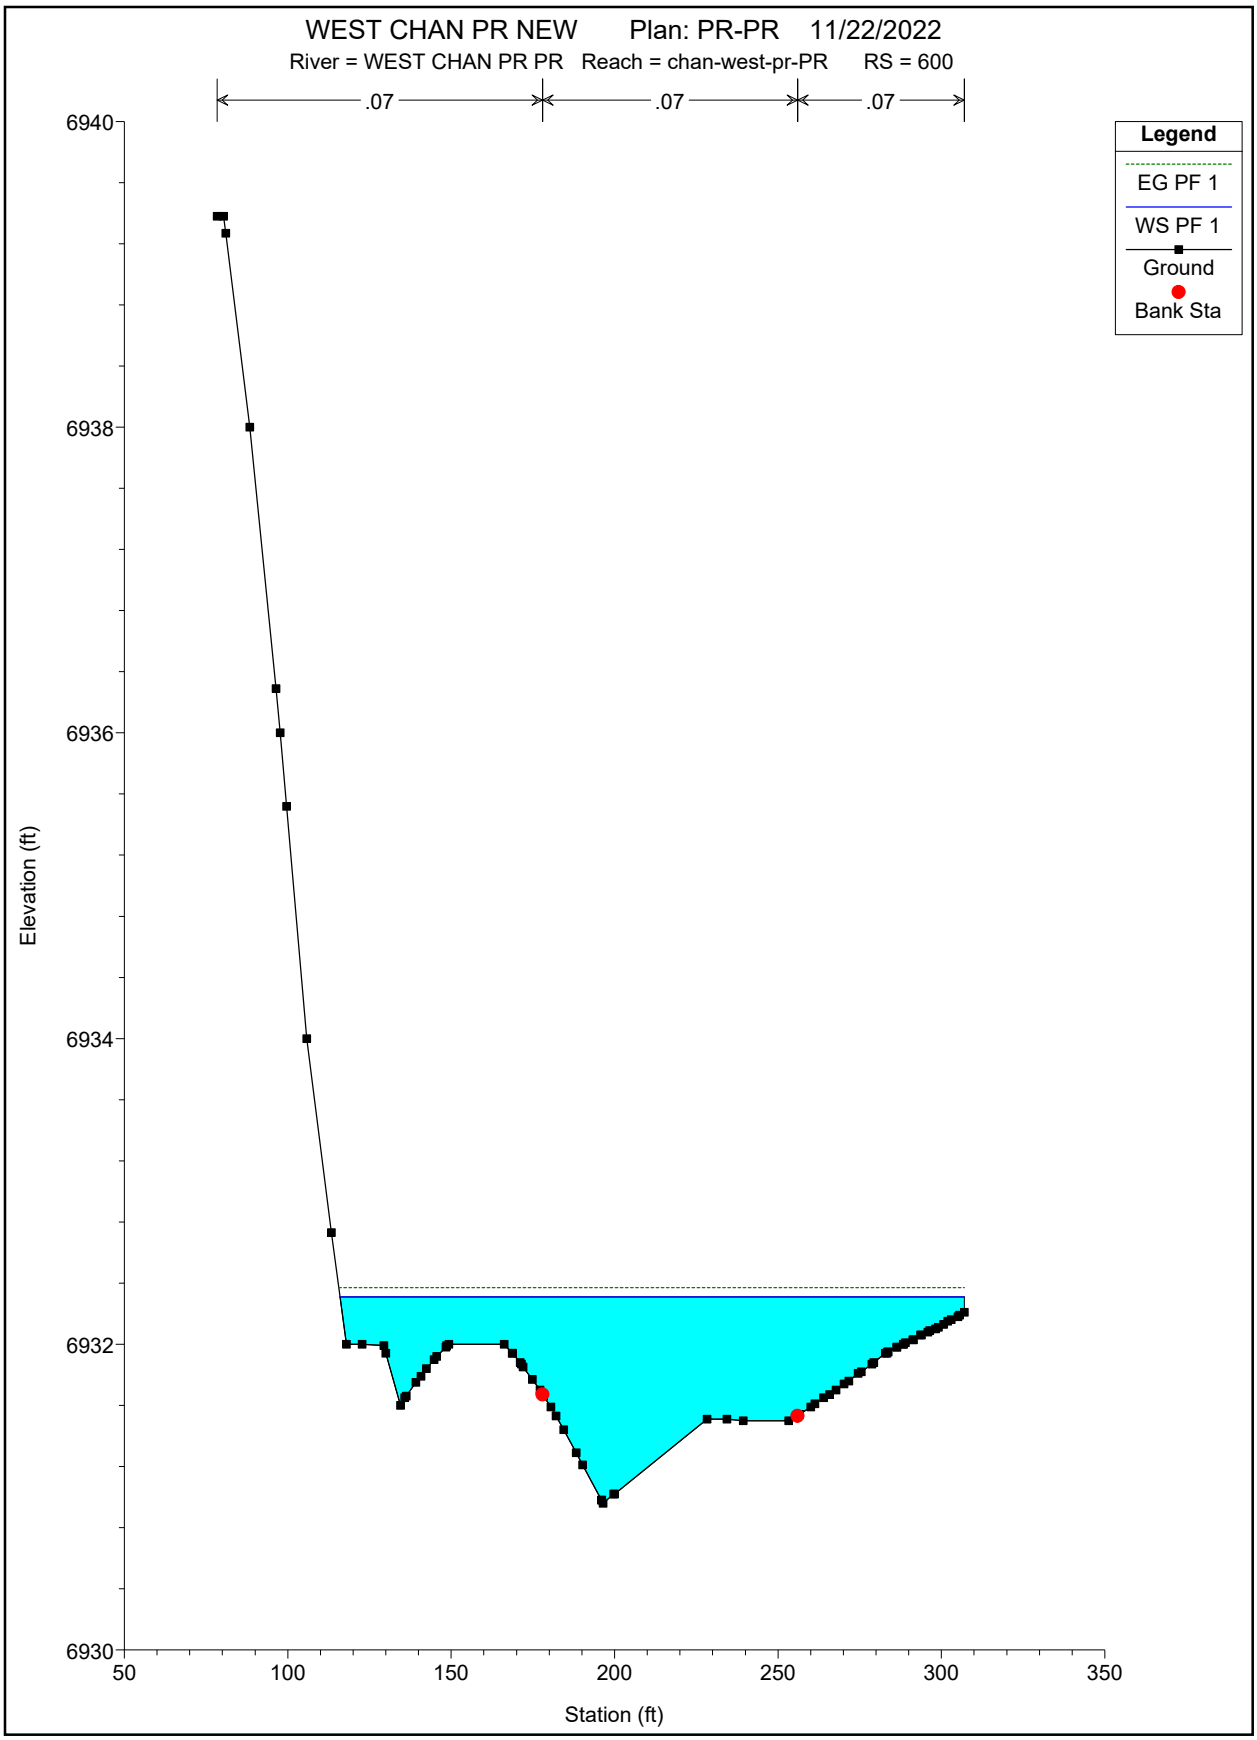
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 600
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6940
6938
6936
6934
6932
6930
Elevation (ft)
50
100
150
200
250
300
350
Station (ft)

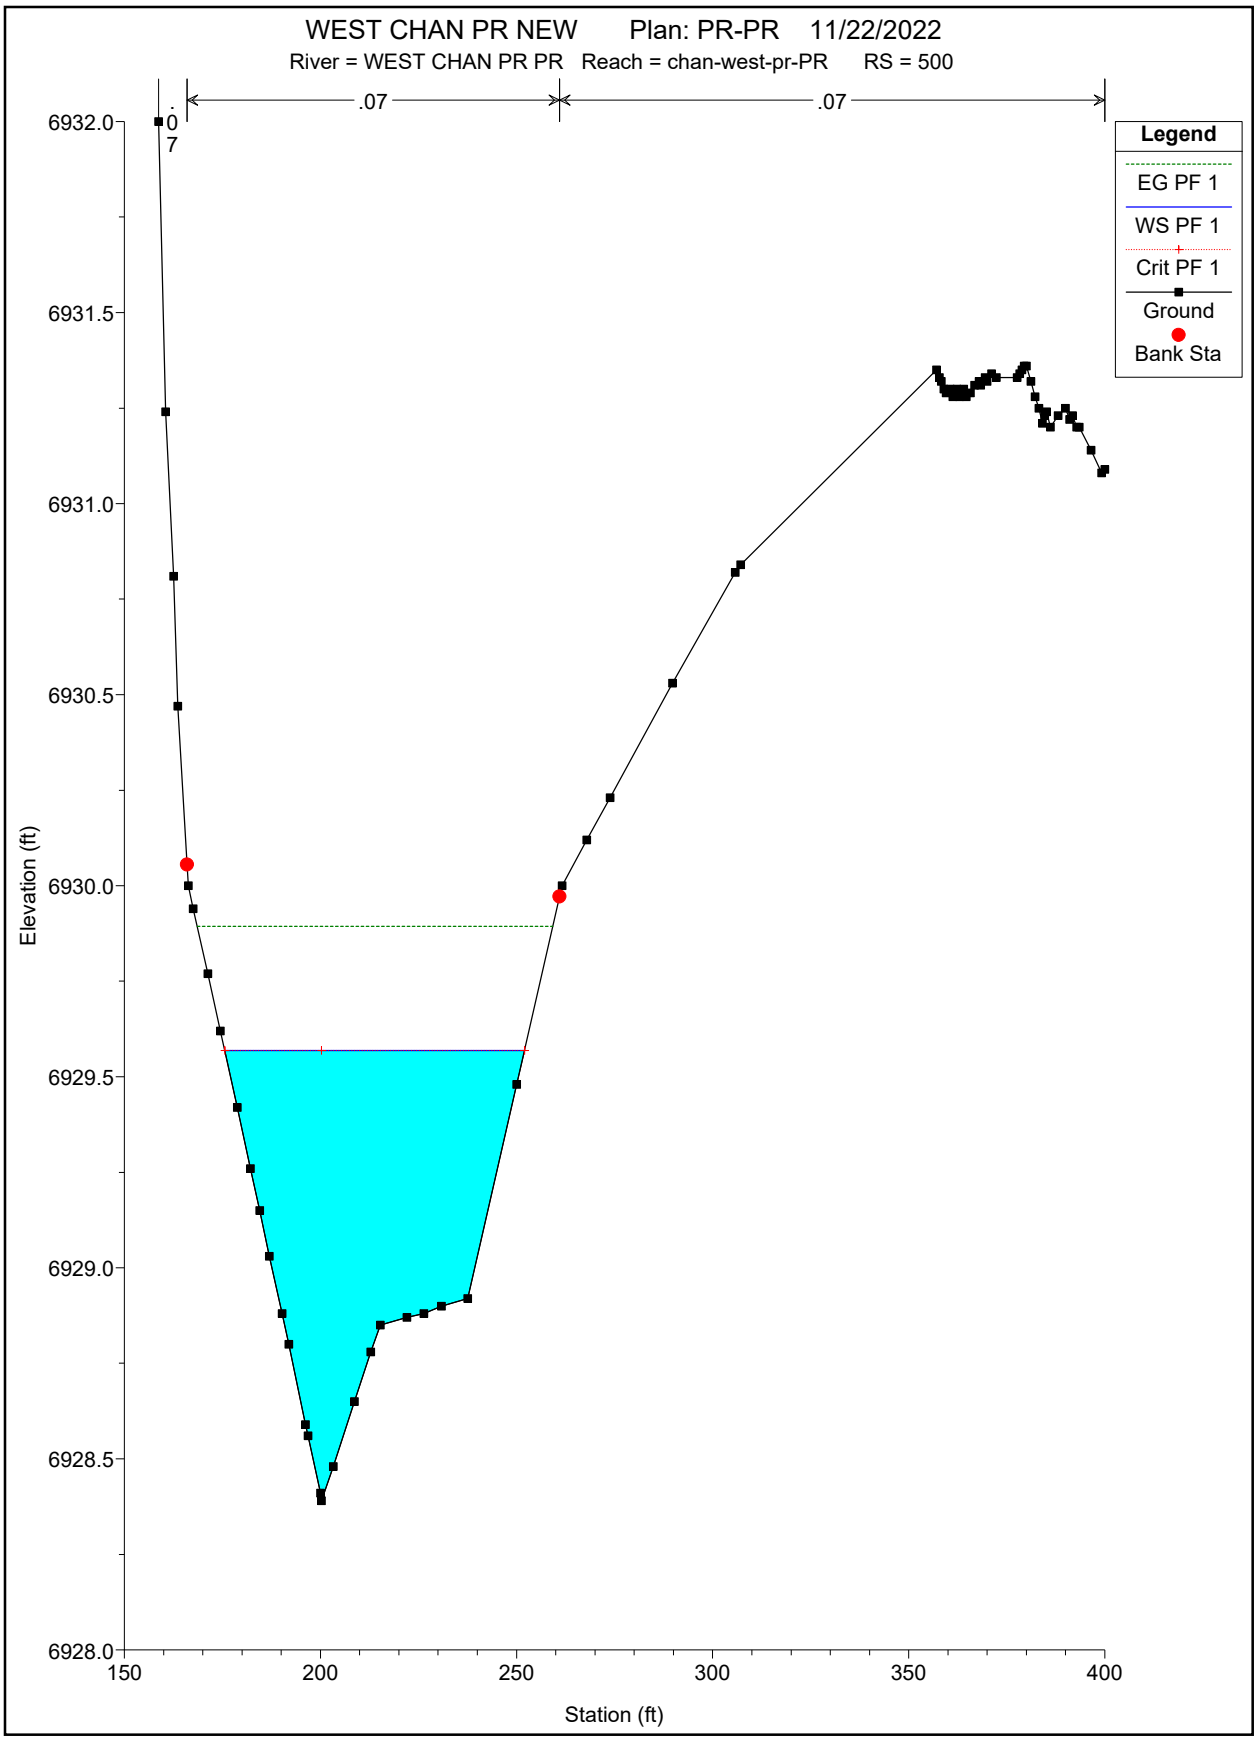
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 500
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
Station (ft)
6932.0
6931.5
6931.0
6930.5
6930.0
6929.5
6929.0
6928.5
6928.0
150
200
250
300
350
400

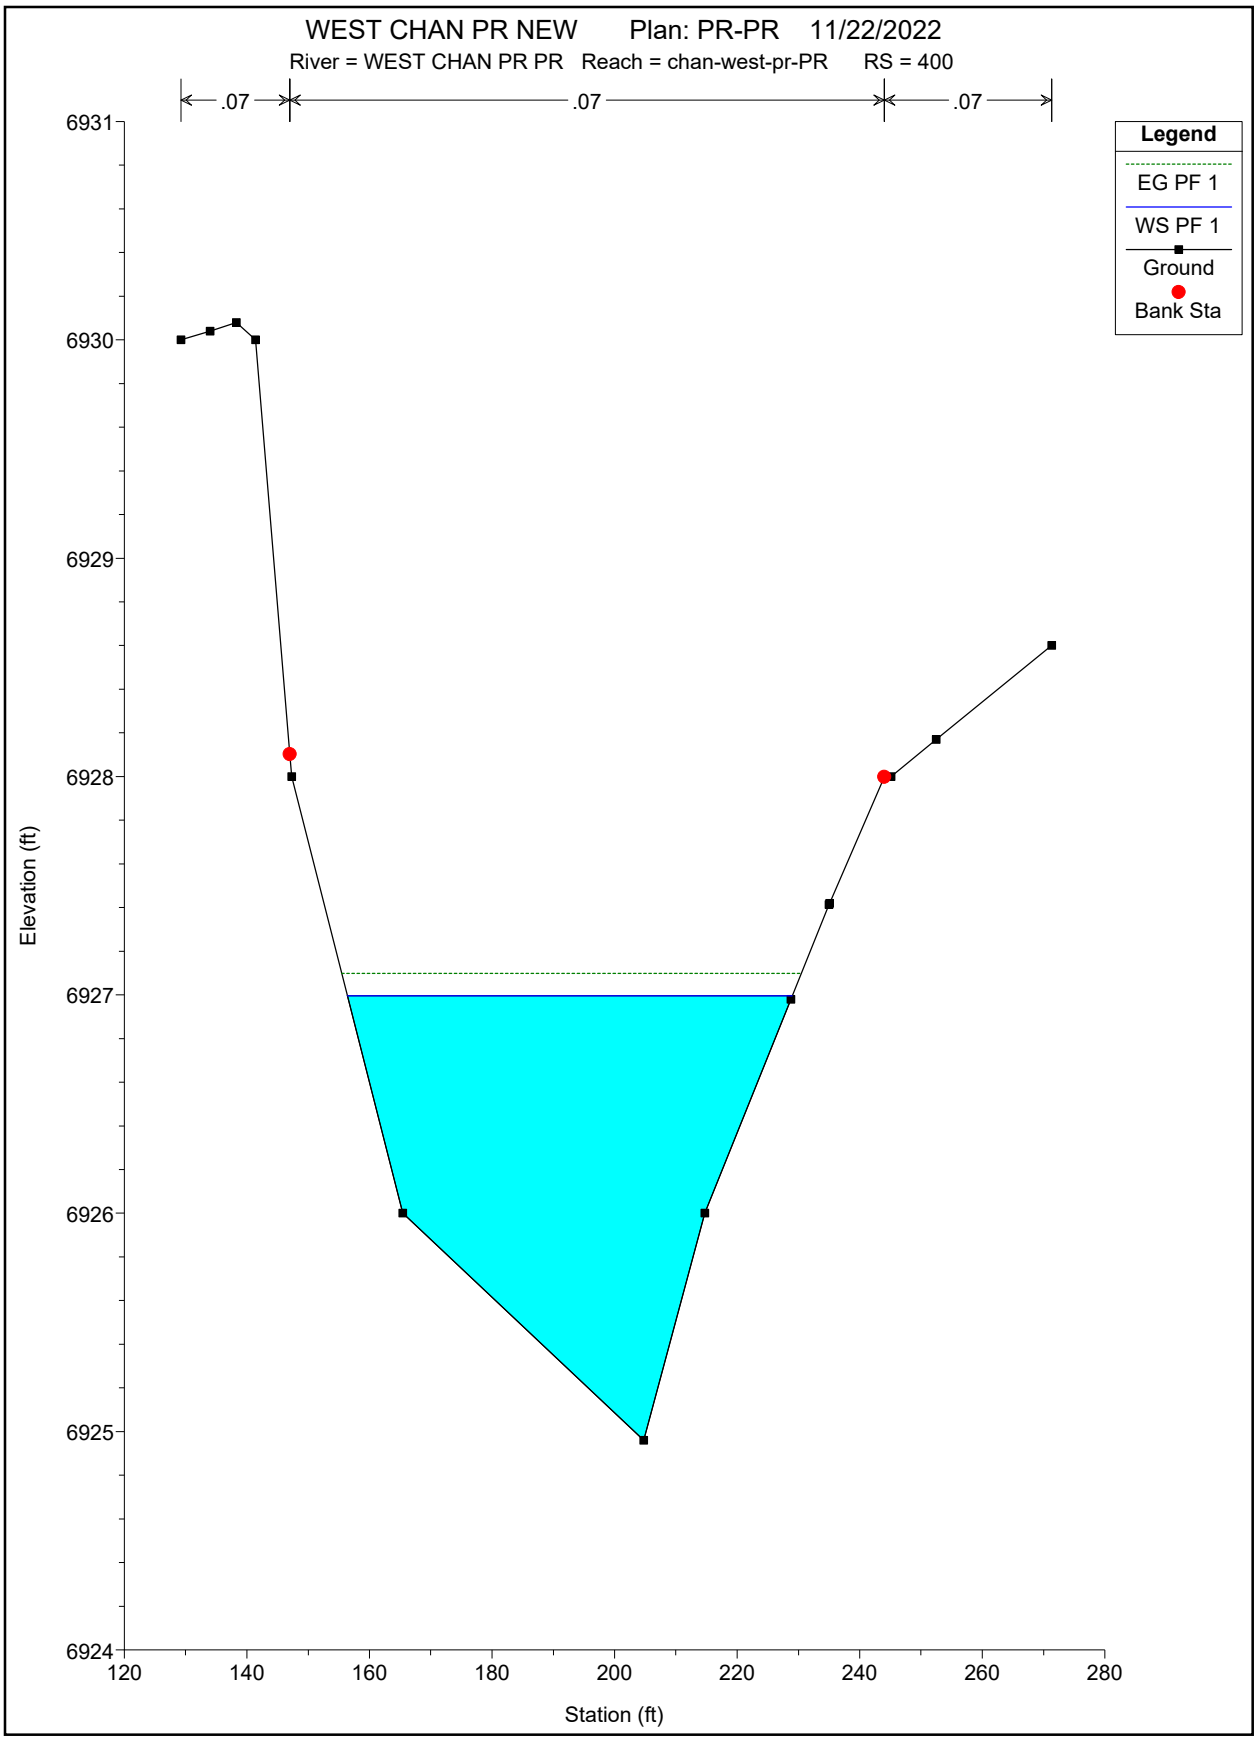
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 400
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
Station (ft)
6931
6930
6929
6928
6927
6926
6925
6924
120
140
160
180
200
220
240
260
280

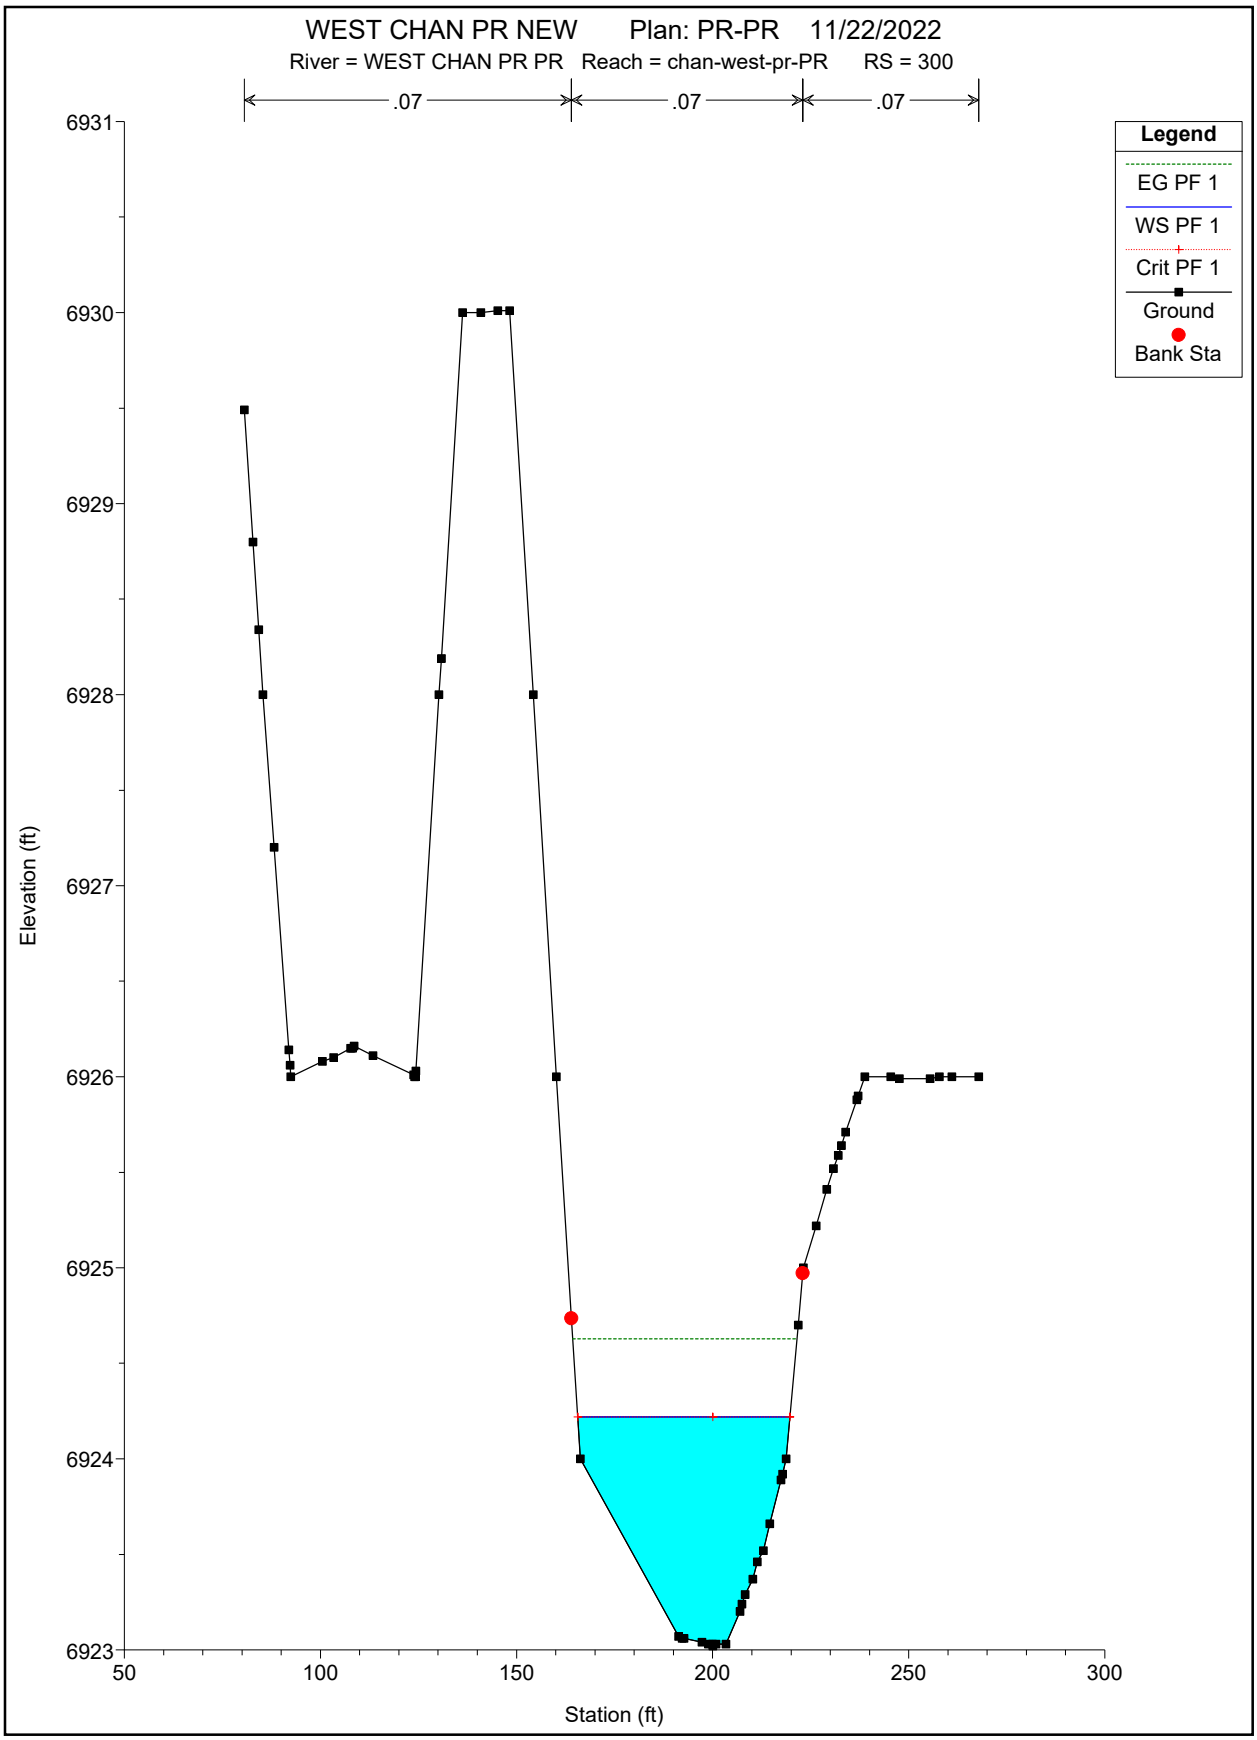
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 300
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6931
6930
6929
6928
6927
6926
6925
6924
6923
50
100
150
200
250
300
Station (ft)

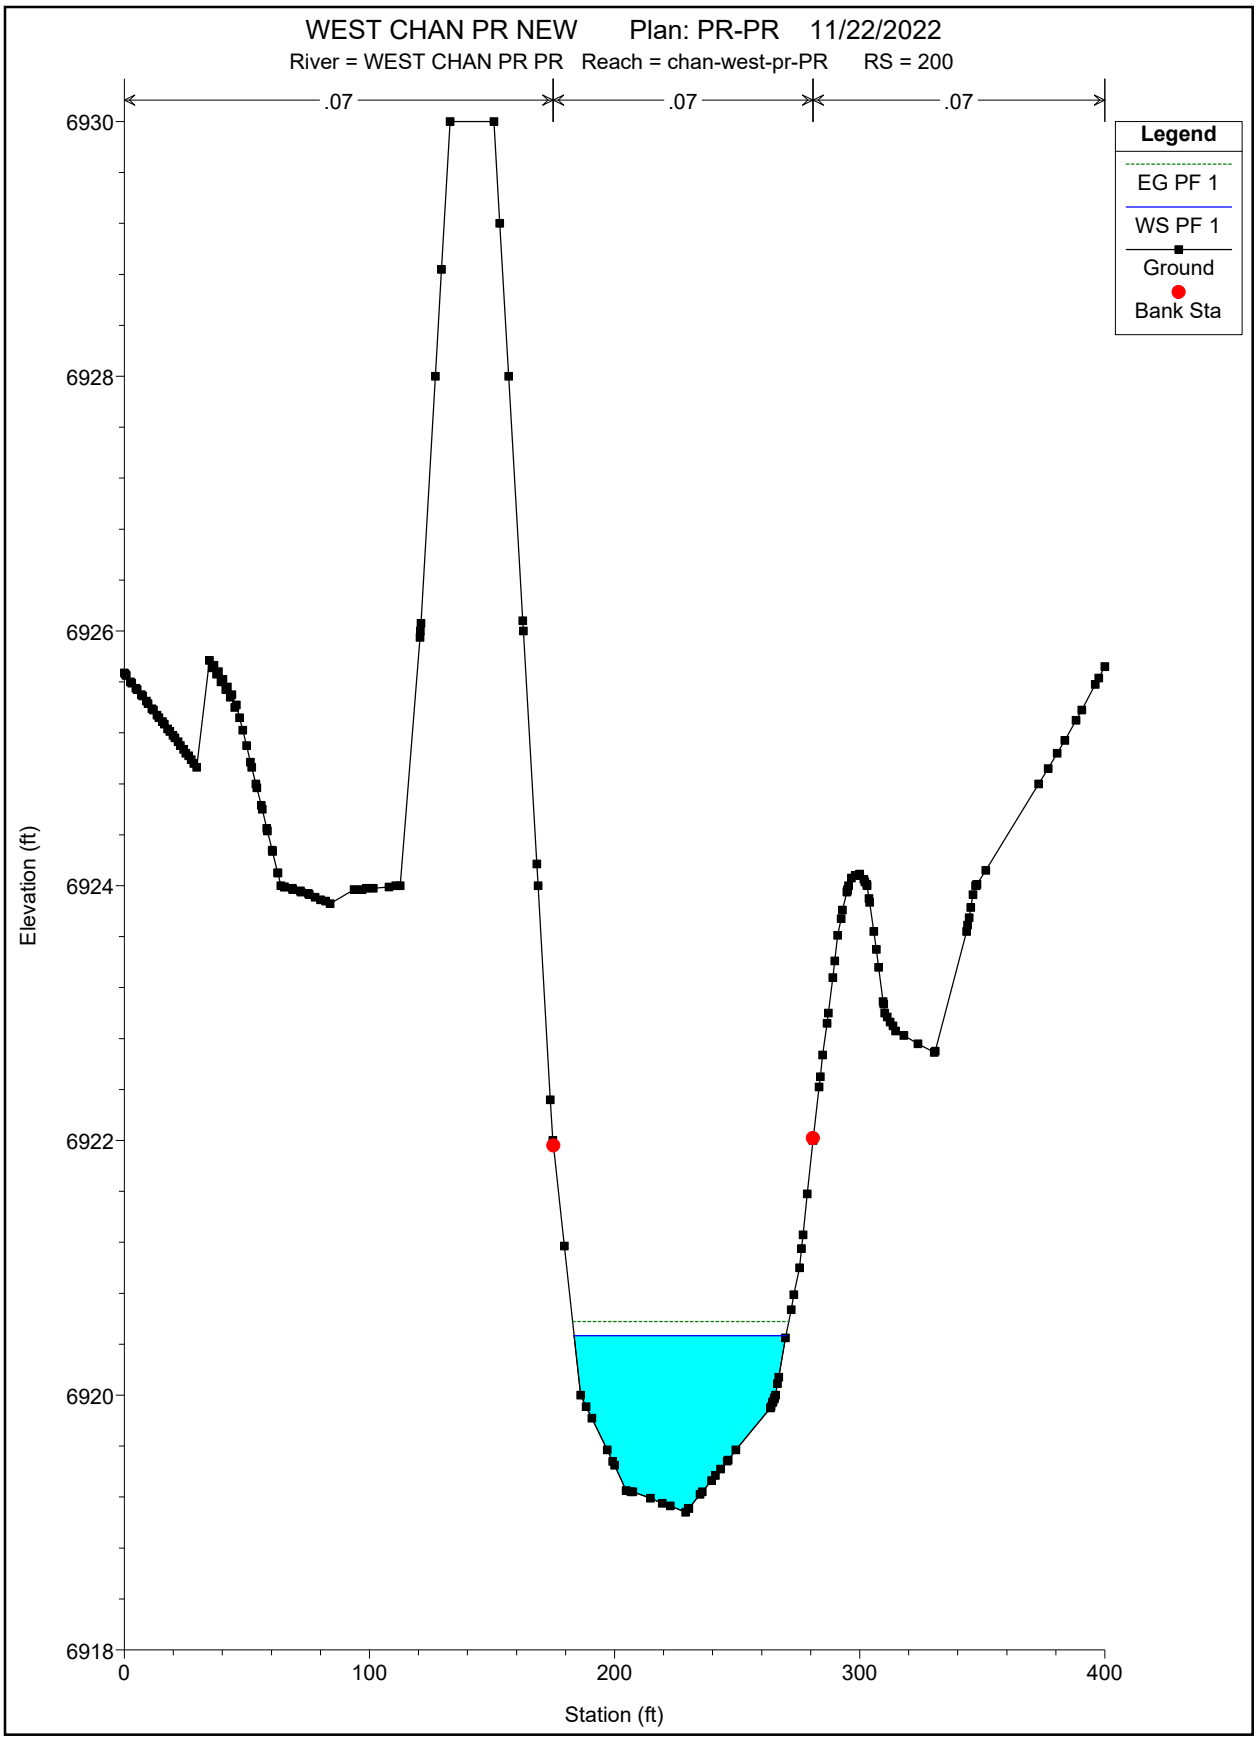
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 200
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6930
6928
6926
6924
6922
6920
6918
Elevation (ft)
0
100
200
300
400
Station (ft)

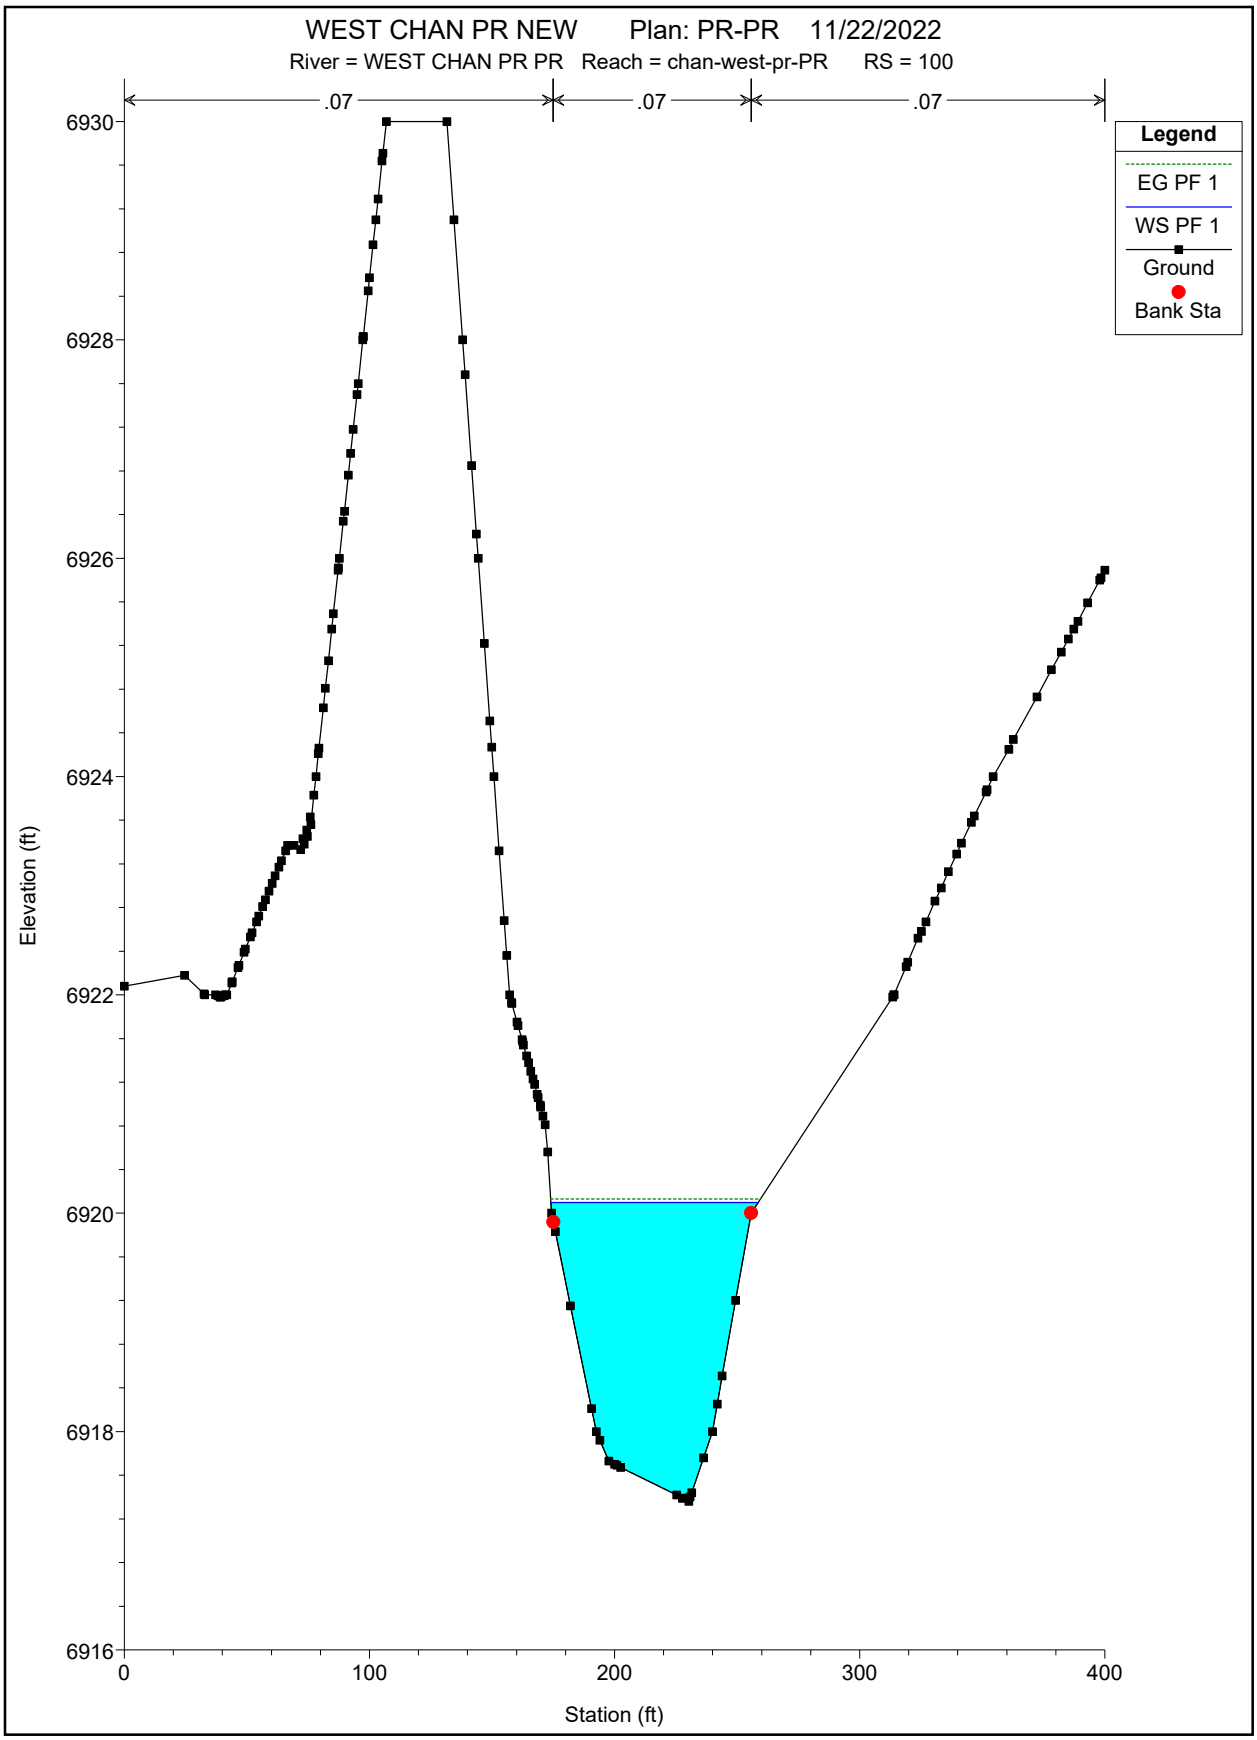
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 100
.07
.07
.07
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6930
6928
6926
6924
6922
6920
6918
6916
Elevation (ft)
0
100
200
300
400
Station (ft)

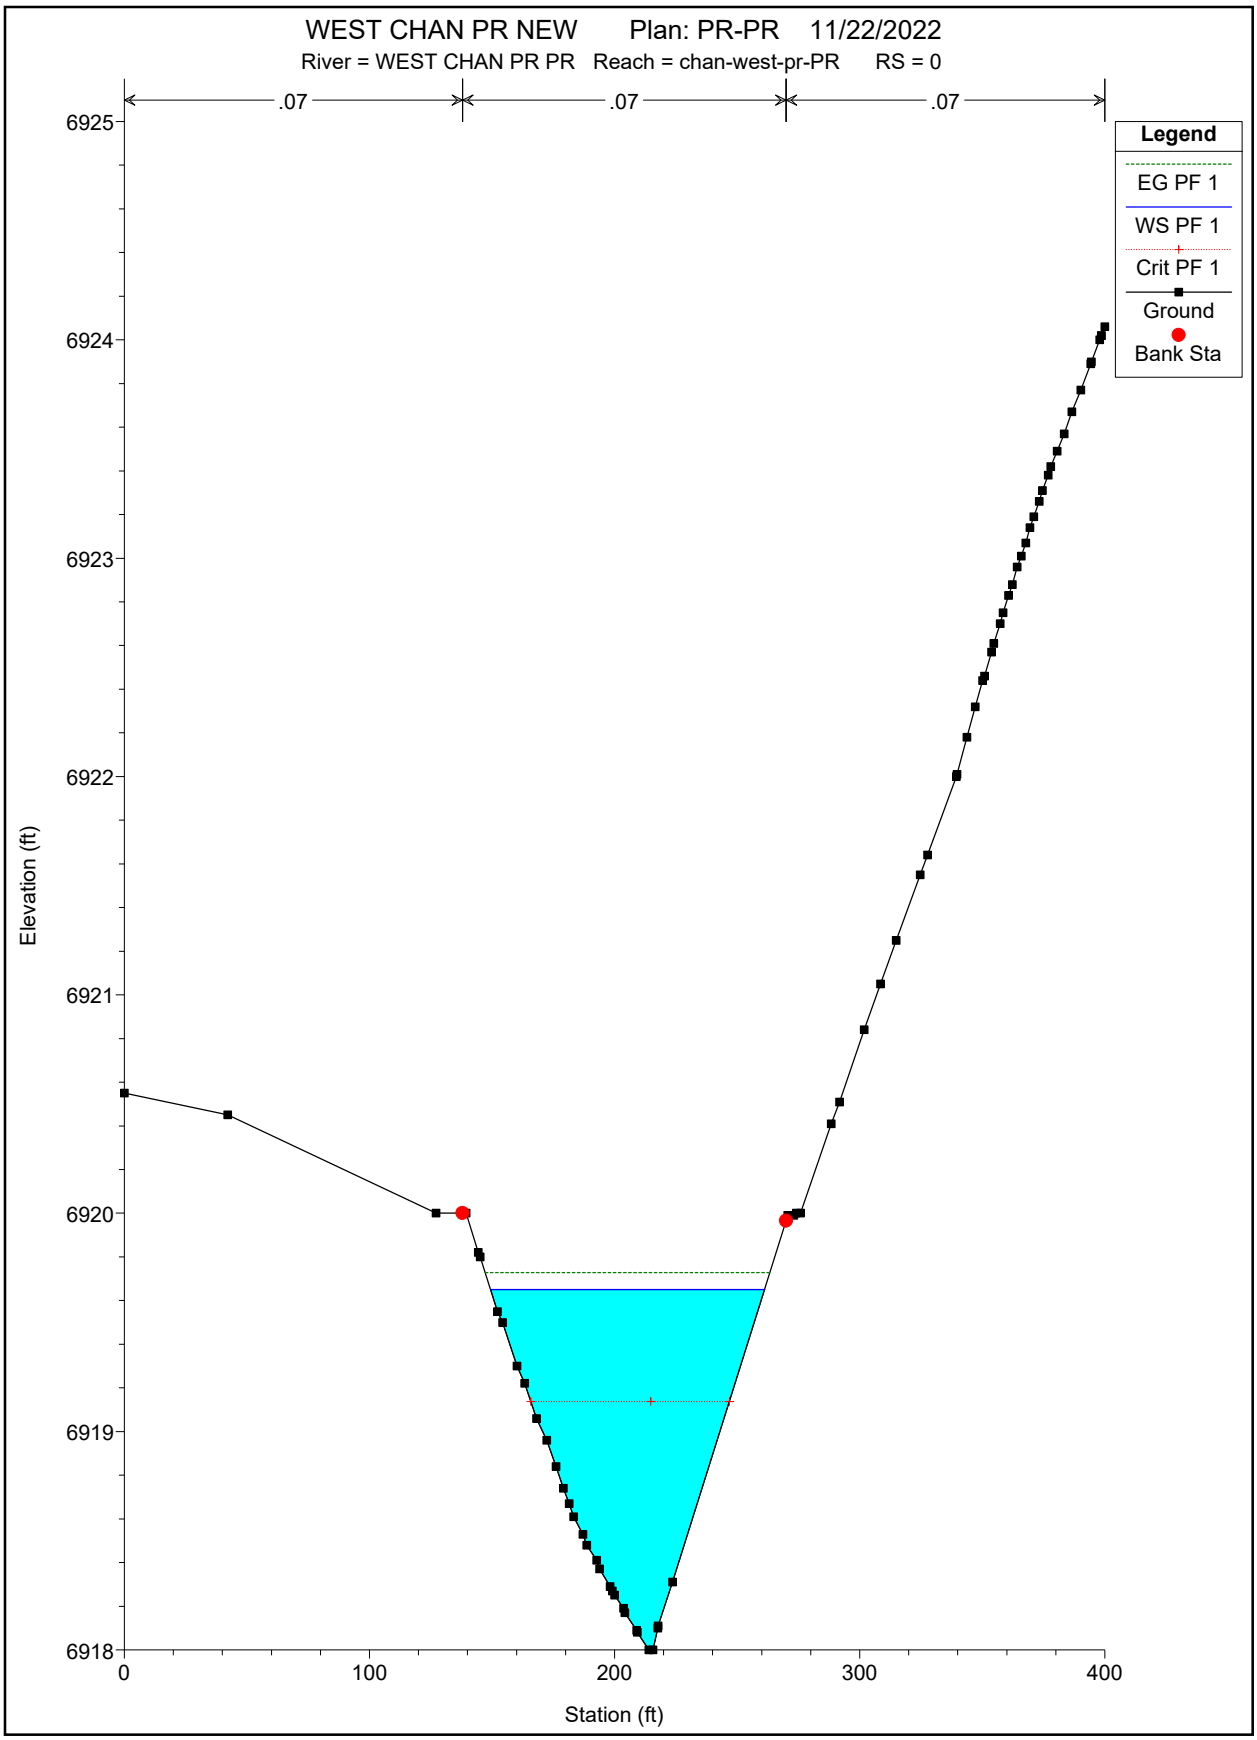
WEST CHAN PR NEW Plan: PR-PR 11/22/2022
River = WEST CHAN PR PR Reach = chan-west-pr-PR RS = 0
.07
.07
.07
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6925
6924
6923
6922
6921
6920
6919
6918
Elevation (ft)
0
100
200
300
400
Station (ft)

EAST CHANNEL PROPOSED CONDITIONS

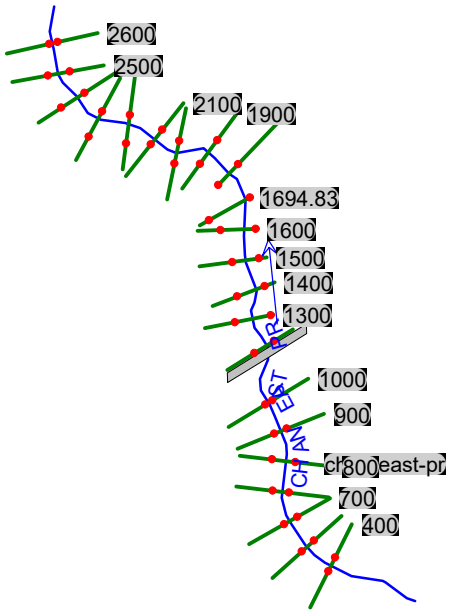

HEC-RAS Plan: Plan 01 River: CHAN EAST PR Reach: chan-east-pr Profile: PF 1

Reach	River Sta	Profile	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
			(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft/s)	(sq ft)	(ft)	
chan-east-pr	2600	PF 1	120.00	6942.53	6944.39		6944.48	0.019970	2.84	55.31	96.02	0.47
chan-east-pr	2500	PF 1	120.00	6941.18	6942.95		6943.00	0.011213	1.82	69.79	107.49	0.34
chan-east-pr	2400	PF 1	120.00	6939.95	6941.49		6941.57	0.018928	2.20	54.51	68.07	0.43
chan-east-pr	2300	PF 1	120.00	6938.19	6939.32		6939.41	0.024903	2.36	50.83	70.26	0.49
chan-east-pr	2200	PF 1	120.00	6936.58	6938.20		6938.24	0.006720	1.44	83.98	96.95	0.26
chan-east-pr	2100	PF 1	120.00	6935.13	6937.32		6937.39	0.010706	2.12	56.69	48.29	0.34
chan-east-pr	2010.45	PF 1	120.00	6933.88	6935.28		6935.48	0.060124	3.54	33.95	51.85	0.75
chan-east-pr	1900	PF 1	120.00	6931.88	6933.67		6933.70	0.007046	1.53	78.58	80.97	0.27
chan-east-pr	1801.17	PF 1	120.00	6931.01	6932.38		6932.46	0.028688	2.26	53.11	87.19	0.51
chan-east-pr	1694.83	PF 1	120.00	6929.94	6930.91		6930.93	0.008419	1.30	92.65	139.75	0.28
chan-east-pr	1600	PF 1	120.00	6928.36	6929.36	6929.13	6929.46	0.037429	2.59	46.35	75.77	0.58
chan-east-pr	1500	PF 1	120.00	6924.52	6926.32		6926.45	0.024682	2.92	41.13	40.91	0.51
chan-east-pr	1400	PF 1	120.00	6922.11	6924.60		6924.66	0.013218	2.04	58.94	63.00	0.37
chan-east-pr	1300	PF 1	120.00	6921.11	6923.45		6923.51	0.010011	1.94	61.98	57.78	0.33
chan-east-pr	1200	PF 1	120.00	6919.19	6923.45	6920.42	6923.45	0.000130	0.46	284.35	116.74	0.05
chan-east-pr	1111.15		Culvert									
chan-east-pr	1000	PF 1	120.00	6916.11	6918.62		6918.73	0.011875	2.69	49.46	50.50	0.38
chan-east-pr	900	PF 1	120.00	6915.02	6917.38		6917.48	0.013156	2.50	48.04	37.27	0.39
chan-east-pr	800	PF 1	120.00	6913.85	6916.41		6916.48	0.007767	2.04	58.68	41.67	0.30
chan-east-pr	700	PF 1	120.00	6913.13	6915.68		6915.73	0.007063	1.87	64.05	48.08	0.29
chan-east-pr	600	PF 1	120.00	6912.13	6914.18		6914.38	0.034817	3.60	33.30	31.11	0.61
chan-east-pr	500	PF 1	120.00	6909.89	6912.63		6912.72	0.009428	2.35	51.05	33.77	0.34
chan-east-pr	400	PF 1	120.00	6908.81	6911.50	6910.69	6911.61	0.013008	2.68	44.70	30.55	0.39

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2600 Profile: PF 1

E.G. Elev (ft)	6944.48	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.10	Wt. n-Val.	0.080	0.080	0.080
W.S. Elev (ft)	6944.39	Reach Len. (ft)	103.00	100.00	103.00
Crit W.S. (ft)		Flow Area (sq ft)	1.09	30.69	23.52
E.G. Slope (ft/ft)	0.019970	Area (sq ft)	1.09	30.69	23.52
Q Total (cfs)	120.00	Flow (cfs)	0.96	87.15	31.89
Top Width (ft)	96.02	Top Width (ft)	5.66	27.00	63.36
Vel Total (ft/s)	2.17	Avg. Vel. (ft/s)	0.88	2.84	1.36
Max Chl Dpth (ft)	1.85	Hydr. Depth (ft)	0.19	1.14	0.37
Conv. Total (cfs)	849.2	Conv. (cfs)	6.8	616.7	225.7
Length Wtd. (ft)	100.45	Wetted Per. (ft)	5.67	27.28	63.37
Min Ch El (ft)	6942.53	Shear (lb/sq ft)	0.24	1.40	0.46
Alpha	1.35	Stream Power (lb/ft s)	0.21	3.98	0.63
Frctn Loss (ft)	1.47	Cum Volume (acre-ft)	0.02	2.89	0.09
C & E Loss (ft)	0.01	Cum SA (acres)	0.14	3.03	0.26

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2500 Profile: PF 1

E.G. Elev (ft)	6943.00	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.05	Wt. n-Val.	0.080	0.080	0.080
W.S. Elev (ft)	6942.95	Reach Len. (ft)	83.00	100.00	112.00
Crit W.S. (ft)		Flow Area (sq ft)	3.26	64.09	2.44
E.G. Slope (ft/ft)	0.011213	Area (sq ft)	3.26	64.09	2.44
Q Total (cfs)	120.00	Flow (cfs)	1.90	116.49	1.61
Top Width (ft)	107.49	Top Width (ft)	22.95	72.00	12.54
Vel Total (ft/s)	1.72	Avg. Vel. (ft/s)	0.58	1.82	0.66
Max Chl Dpth (ft)	1.77	Hydr. Depth (ft)	0.14	0.89	0.19
Conv. Total (cfs)	1133.2	Conv. (cfs)	17.9	1100.1	15.2
Length Wtd. (ft)	99.95	Wetted Per. (ft)	23.07	72.15	12.54
Min Ch El (ft)	6941.18	Shear (lb/sq ft)	0.10	0.62	0.14
Alpha	1.09	Stream Power (lb/ft s)	0.06	1.13	0.09
Frctn Loss (ft)	1.43	Cum Volume (acre-ft)	0.02	2.78	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.10	2.91	0.17

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2400 Profile: PF 1

E.G. Elev (ft)	6941.57	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.080	
W.S. Elev (ft)	6941.49	Reach Len. (ft)	83.00	100.00	128.00
Crit W.S. (ft)		Flow Area (sq ft)		54.51	
E.G. Slope (ft/ft)	0.018928	Area (sq ft)		54.51	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	68.07	Top Width (ft)		68.07	
Vel Total (ft/s)	2.20	Avg. Vel. (ft/s)		2.20	
Max Chl Dpth (ft)	1.54	Hydr. Depth (ft)		0.80	
Conv. Total (cfs)	872.2	Conv. (cfs)		872.2	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		68.16	
Min Ch El (ft)	6939.95	Shear (lb/sq ft)		0.94	
Alpha	1.00	Stream Power (lb/ft s)		2.08	
Frctn Loss (ft)	2.16	Cum Volume (acre-ft)	0.01	2.65	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.08	2.75	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2300 Profile: PF 1

E.G. Elev (ft)	6939.41	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.09	Wt. n-Val.		0.080	
W.S. Elev (ft)	6939.32	Reach Len. (ft)	90.00	100.00	123.00
Crit W.S. (ft)		Flow Area (sq ft)		50.83	
E.G. Slope (ft/ft)	0.024903	Area (sq ft)		50.83	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	70.26	Top Width (ft)		70.26	
Vel Total (ft/s)	2.36	Avg. Vel. (ft/s)		2.36	
Max Chl Dpth (ft)	1.13	Hydr. Depth (ft)		0.72	
Conv. Total (cfs)	760.4	Conv. (cfs)		760.4	
Length Wtd. (ft)	99.99	Wetted Per. (ft)		70.31	
Min Ch El (ft)	6938.19	Shear (lb/sq ft)		1.12	
Alpha	1.00	Stream Power (lb/ft s)		2.65	
Frctn Loss (ft)	1.16	Cum Volume (acre-ft)	0.01	2.52	0.06
C & E Loss (ft)	0.02	Cum SA (acres)	0.08	2.59	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2200 Profile: PF 1

E.G. Elev (ft)	6938.24	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.03	Wt. n-Val.	0.080	0.080	
W.S. Elev (ft)	6938.20	Reach Len. (ft)	115.00	100.00	80.00
Crit W.S. (ft)		Flow Area (sq ft)	0.51	83.47	
E.G. Slope (ft/ft)	0.006720	Area (sq ft)	0.51	83.47	
Q Total (cfs)	120.00	Flow (cfs)	0.15	119.85	
Top Width (ft)	96.95	Top Width (ft)	5.96	90.98	
Vel Total (ft/s)	1.43	Avg. Vel. (ft/s)	0.30	1.44	
Max Chl Dpth (ft)	1.62	Hydr. Depth (ft)	0.09	0.92	
Conv. Total (cfs)	1463.8	Conv. (cfs)	1.8	1462.0	
Length Wtd. (ft)	100.01	Wetted Per. (ft)	5.97	91.15	
Min Ch El (ft)	6936.58	Shear (lb/sq ft)	0.04	0.38	
Alpha	1.01	Stream Power (lb/ft s)	0.01	0.55	
Frctn Loss (ft)	0.84	Cum Volume (acre-ft)	0.01	2.37	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.07	2.41	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2100 Profile: PF 1

E.G. Elev (ft)	6937.39	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.07	Wt. n-Val.		0.080	
W.S. Elev (ft)	6937.32	Reach Len. (ft)	65.00	89.55	98.00
Crit W.S. (ft)		Flow Area (sq ft)		56.69	
E.G. Slope (ft/ft)	0.010706	Area (sq ft)		56.69	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	48.29	Top Width (ft)		48.29	
Vel Total (ft/s)	2.12	Avg. Vel. (ft/s)		2.12	
Max Chl Dpth (ft)	2.19	Hydr. Depth (ft)		1.17	
Conv. Total (cfs)	1159.7	Conv. (cfs)		1159.7	
Length Wtd. (ft)	89.55	Wetted Per. (ft)		49.05	
Min Ch El (ft)	6935.13	Shear (lb/sq ft)		0.77	
Alpha	1.00	Stream Power (lb/ft s)		1.64	
Frctn Loss (ft)	1.90	Cum Volume (acre-ft)	0.01	2.21	0.06
C & E Loss (ft)	0.01	Cum SA (acres)	0.07	2.25	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 2010.45 Profile: PF 1

E.G. Elev (ft)	6935.48	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.19	Wt. n-Val.		0.080	0.080
W.S. Elev (ft)	6935.28	Reach Len. (ft)	123.00	110.45	82.00
Crit W.S. (ft)		Flow Area (sq ft)		33.90	0.05
E.G. Slope (ft/ft)	0.060124	Area (sq ft)		33.90	0.05
Q Total (cfs)	120.00	Flow (cfs)		119.98	0.02
Top Width (ft)	51.85	Top Width (ft)		49.38	2.48
Vel Total (ft/s)	3.53	Avg. Vel. (ft/s)		3.54	0.35
Max Chl Dpth (ft)	1.40	Hydr. Depth (ft)		0.69	0.02
Conv. Total (cfs)	489.4	Conv. (cfs)		489.3	0.1
Length Wtd. (ft)	110.45	Wetted Per. (ft)		49.47	2.48
Min Ch El (ft)	6933.88	Shear (lb/sq ft)		2.57	0.08
Alpha	1.00	Stream Power (lb/ft s)		9.10	0.03
Frctn Loss (ft)	1.73	Cum Volume (acre-ft)	0.01	2.12	0.06
C & E Loss (ft)	0.05	Cum SA (acres)	0.07	2.15	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1900 Profile: PF 1

E.G. Elev (ft)	6933.70	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.04	Wt. n-Val.		0.080	
W.S. Elev (ft)	6933.67	Reach Len. (ft)	102.00	98.83	89.00
Crit W.S. (ft)		Flow Area (sq ft)		78.58	
E.G. Slope (ft/ft)	0.007046	Area (sq ft)		78.58	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	80.97	Top Width (ft)		80.97	
Vel Total (ft/s)	1.53	Avg. Vel. (ft/s)		1.53	
Max Chl Dpth (ft)	1.79	Hydr. Depth (ft)		0.97	
Conv. Total (cfs)	1429.5	Conv. (cfs)		1429.5	
Length Wtd. (ft)	98.83	Wetted Per. (ft)		81.06	
Min Ch El (ft)	6931.88	Shear (lb/sq ft)		0.43	
Alpha	1.00	Stream Power (lb/ft s)		0.65	
Frctn Loss (ft)	1.25	Cum Volume (acre-ft)	0.01	1.97	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.07	1.98	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1801.17 Profile: PF 1

E.G. Elev (ft)	6932.46	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.08	Wt. n-Val.		0.080	
W.S. Elev (ft)	6932.38	Reach Len. (ft)	114.00	106.34	118.00
Crit W.S. (ft)		Flow Area (sq ft)		53.11	
E.G. Slope (ft/ft)	0.028688	Area (sq ft)		53.11	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	87.19	Top Width (ft)		87.19	
Vel Total (ft/s)	2.26	Avg. Vel. (ft/s)		2.26	
Max Chl Dpth (ft)	1.37	Hydr. Depth (ft)		0.61	
Conv. Total (cfs)	708.5	Conv. (cfs)		708.5	
Length Wtd. (ft)	106.34	Wetted Per. (ft)		87.27	
Min Ch El (ft)	6931.01	Shear (lb/sq ft)		1.09	
Alpha	1.00	Stream Power (lb/ft s)		2.46	
Frctn Loss (ft)	1.51	Cum Volume (acre-ft)	0.01	1.82	0.06
C & E Loss (ft)	0.02	Cum SA (acres)	0.07	1.79	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1694.83 Profile: PF 1

E.G. Elev (ft)	6930.93	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.03	Wt. n-Val.		0.080	
W.S. Elev (ft)	6930.91	Reach Len. (ft)	103.00	94.83	49.00
Crit W.S. (ft)		Flow Area (sq ft)		92.65	
E.G. Slope (ft/ft)	0.008419	Area (sq ft)		92.65	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	139.75	Top Width (ft)		139.75	
Vel Total (ft/s)	1.30	Avg. Vel. (ft/s)		1.30	
Max Chl Dpth (ft)	0.97	Hydr. Depth (ft)		0.66	
Conv. Total (cfs)	1307.8	Conv. (cfs)		1307.8	
Length Wtd. (ft)	94.83	Wetted Per. (ft)		139.85	
Min Ch El (ft)	6929.94	Shear (lb/sq ft)		0.35	
Alpha	1.00	Stream Power (lb/ft s)		0.45	
Frctn Loss (ft)	1.47	Cum Volume (acre-ft)	0.01	1.65	0.06
C & E Loss (ft)	0.01	Cum SA (acres)	0.07	1.52	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1600 Profile: PF 1

E.G. Elev (ft)	6929.46	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.10	Wt. n-Val.		0.080	
W.S. Elev (ft)	6929.36	Reach Len. (ft)	96.00	100.00	108.00
Crit W.S. (ft)	6929.13	Flow Area (sq ft)		46.35	
E.G. Slope (ft/ft)	0.037429	Area (sq ft)		46.35	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	75.77	Top Width (ft)		75.77	
Vel Total (ft/s)	2.59	Avg. Vel. (ft/s)		2.59	
Max Chl Dpth (ft)	1.00	Hydr. Depth (ft)		0.61	
Conv. Total (cfs)	620.3	Conv. (cfs)		620.3	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		75.81	
Min Ch El (ft)	6928.36	Shear (lb/sq ft)		1.43	
Alpha	1.00	Stream Power (lb/ft s)		3.70	
Frctn Loss (ft)	3.01	Cum Volume (acre-ft)	0.01	1.49	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.07	1.28	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1500 Profile: PF 1

E.G. Elev (ft)	6926.45	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.13	Wt. n-Val.		0.080	
W.S. Elev (ft)	6926.32	Reach Len. (ft)	91.00	100.00	112.00
Crit W.S. (ft)		Flow Area (sq ft)		41.13	
E.G. Slope (ft/ft)	0.024682	Area (sq ft)		41.13	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	40.91	Top Width (ft)		40.91	
Vel Total (ft/s)	2.92	Avg. Vel. (ft/s)		2.92	
Max Chl Dpth (ft)	1.80	Hydr. Depth (ft)		1.01	
Conv. Total (cfs)	763.8	Conv. (cfs)		763.8	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		41.13	
Min Ch El (ft)	6924.52	Shear (lb/sq ft)		1.54	
Alpha	1.00	Stream Power (lb/ft s)		4.50	
Frctn Loss (ft)	1.76	Cum Volume (acre-ft)	0.01	1.39	0.06
C & E Loss (ft)	0.02	Cum SA (acres)	0.07	1.15	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1400 Profile: PF 1

E.G. Elev (ft)	6924.66	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.06	Wt. n-Val.		0.080	
W.S. Elev (ft)	6924.60	Reach Len. (ft)	96.00	100.00	83.00
Crit W.S. (ft)		Flow Area (sq ft)		58.94	
E.G. Slope (ft/ft)	0.013218	Area (sq ft)		58.94	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	63.00	Top Width (ft)		63.00	
Vel Total (ft/s)	2.04	Avg. Vel. (ft/s)		2.04	
Max Chl Dpth (ft)	2.49	Hydr. Depth (ft)		0.94	
Conv. Total (cfs)	1043.8	Conv. (cfs)		1043.8	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		63.31	
Min Ch El (ft)	6922.11	Shear (lb/sq ft)		0.77	
Alpha	1.00	Stream Power (lb/ft s)		1.56	
Frctn Loss (ft)	1.14	Cum Volume (acre-ft)	0.01	1.28	0.06
C & E Loss (ft)	0.00	Cum SA (acres)	0.07	1.03	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1300 Profile: PF 1

E.G. Elev (ft)	6923.51	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.06	Wt. n-Val.		0.080	
W.S. Elev (ft)	6923.45	Reach Len. (ft)	83.00	100.00	118.00
Crit W.S. (ft)		Flow Area (sq ft)		61.98	
E.G. Slope (ft/ft)	0.010011	Area (sq ft)		61.98	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	57.78	Top Width (ft)		57.78	
Vel Total (ft/s)	1.94	Avg. Vel. (ft/s)		1.94	
Max Chl Dpth (ft)	2.34	Hydr. Depth (ft)		1.07	
Conv. Total (cfs)	1199.3	Conv. (cfs)		1199.3	
Length Wtd. (ft)	100.55	Wetted Per. (ft)		58.28	
Min Ch El (ft)	6921.11	Shear (lb/sq ft)		0.66	
Alpha	1.00	Stream Power (lb/ft s)		1.29	
Frctn Loss (ft)	0.04	Cum Volume (acre-ft)	0.01	1.14	0.06
C & E Loss (ft)	0.02	Cum SA (acres)	0.07	0.89	0.15

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1200 Profile: PF 1

E.G. Elev (ft)	6923.45	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.00	Wt. n-Val.	0.080	0.080	0.080
W.S. Elev (ft)	6923.45	Reach Len. (ft)	191.00	200.00	169.00
Crit W.S. (ft)	6920.42	Flow Area (sq ft)	10.33	237.81	36.21
E.G. Slope (ft/ft)	0.000130	Area (sq ft)	10.33	237.81	36.21
Q Total (cfs)	120.00	Flow (cfs)	1.77	109.27	8.95
Top Width (ft)	116.74	Top Width (ft)	14.09	74.00	28.65
Vel Total (ft/s)	0.42	Avg. Vel. (ft/s)	0.17	0.46	0.25
Max Chl Dpth (ft)	4.26	Hydr. Depth (ft)	0.73	3.21	1.26
Conv. Total (cfs)	10505.3	Conv. (cfs)	155.3	9566.0	783.9
Length Wtd. (ft)	200.00	Wetted Per. (ft)	14.18	74.61	28.78
Min Ch El (ft)	6919.19	Shear (lb/sq ft)	0.01	0.03	0.01
Alpha	1.11	Stream Power (lb/ft s)	0.00	0.01	0.00
Frctn Loss (ft)		Cum Volume (acre-ft)	0.00	0.80	0.01
C & E Loss (ft)		Cum SA (acres)	0.05	0.74	0.11

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 1000 Profile: PF 1

E.G. Elev (ft)	6918.73	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.	0.080	0.080	0.080
W.S. Elev (ft)	6918.62	Reach Len. (ft)	103.00	100.00	98.00
Crit W.S. (ft)		Flow Area (sq ft)	2.06	41.94	5.45
E.G. Slope (ft/ft)	0.011875	Area (sq ft)	2.06	41.94	5.45
Q Total (cfs)	120.00	Flow (cfs)	1.93	112.90	5.17
Top Width (ft)	50.50	Top Width (ft)	6.54	27.00	16.96
Vel Total (ft/s)	2.43	Avg. Vel. (ft/s)	0.93	2.69	0.95
Max Chl Dpth (ft)	2.51	Hydr. Depth (ft)	0.32	1.55	0.32
Conv. Total (cfs)	1101.2	Conv. (cfs)	17.7	1036.0	47.5
Length Wtd. (ft)	99.98	Wetted Per. (ft)	6.57	27.35	16.98
Min Ch El (ft)	6916.11	Shear (lb/sq ft)	0.23	1.14	0.24
Alpha	1.17	Stream Power (lb/ft s)	0.22	3.06	0.23
Frctn Loss (ft)	1.25	Cum Volume (acre-ft)	0.00	0.69	0.01
C & E Loss (ft)	0.00	Cum SA (acres)	0.01	0.51	0.02

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 900 Profile: PF 1

E.G. Elev (ft)	6917.48	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.10	Wt. n-Val.		0.080	
W.S. Elev (ft)	6917.38	Reach Len. (ft)	111.00	100.00	84.00
Crit W.S. (ft)		Flow Area (sq ft)		48.04	
E.G. Slope (ft/ft)	0.013156	Area (sq ft)		48.04	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	37.27	Top Width (ft)		37.27	
Vel Total (ft/s)	2.50	Avg. Vel. (ft/s)		2.50	
Max Chl Dpth (ft)	2.36	Hydr. Depth (ft)		1.29	
Conv. Total (cfs)	1046.2	Conv. (cfs)		1046.2	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		37.85	
Min Ch El (ft)	6915.02	Shear (lb/sq ft)		1.04	
Alpha	1.00	Stream Power (lb/ft s)		2.60	
Frctn Loss (ft)	0.99	Cum Volume (acre-ft)		0.58	
C & E Loss (ft)	0.01	Cum SA (acres)		0.43	

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 800 Profile: PF 1

E.G. Elev (ft)	6916.48	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.06	Wt. n-Val.		0.080	
W.S. Elev (ft)	6916.41	Reach Len. (ft)	100.50	100.00	100.00
Crit W.S. (ft)		Flow Area (sq ft)		58.68	
E.G. Slope (ft/ft)	0.007767	Area (sq ft)		58.68	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	41.67	Top Width (ft)		41.67	
Vel Total (ft/s)	2.04	Avg. Vel. (ft/s)		2.04	
Max Chl Dpth (ft)	2.56	Hydr. Depth (ft)		1.41	
Conv. Total (cfs)	1361.6	Conv. (cfs)		1361.6	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		42.03	
Min Ch El (ft)	6913.85	Shear (lb/sq ft)		0.68	
Alpha	1.00	Stream Power (lb/ft s)		1.38	
Frctn Loss (ft)	0.74	Cum Volume (acre-ft)		0.46	
C & E Loss (ft)	0.00	Cum SA (acres)		0.34	

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 700 Profile: PF 1

E.G. Elev (ft)	6915.73	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.05	Wt. n-Val.		0.080	
W.S. Elev (ft)	6915.68	Reach Len. (ft)	82.00	100.00	114.00
Crit W.S. (ft)		Flow Area (sq ft)		64.05	
E.G. Slope (ft/ft)	0.007063	Area (sq ft)		64.05	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	48.08	Top Width (ft)		48.08	
Vel Total (ft/s)	1.87	Avg. Vel. (ft/s)		1.87	
Max Chl Dpth (ft)	2.55	Hydr. Depth (ft)		1.33	
Conv. Total (cfs)	1427.8	Conv. (cfs)		1427.8	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		48.70	
Min Ch El (ft)	6913.13	Shear (lb/sq ft)		0.58	
Alpha	1.00	Stream Power (lb/ft s)		1.09	
Frctn Loss (ft)	1.34	Cum Volume (acre-ft)		0.32	
C & E Loss (ft)	0.01	Cum SA (acres)		0.24	

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 600 Profile: PF 1

E.G. Elev (ft)	6914.38	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.20	Wt. n-Val.		0.080	
W.S. Elev (ft)	6914.18	Reach Len. (ft)	94.00	100.00	104.00
Crit W.S. (ft)		Flow Area (sq ft)		33.30	
E.G. Slope (ft/ft)	0.034817	Area (sq ft)		33.30	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	31.11	Top Width (ft)		31.11	
Vel Total (ft/s)	3.60	Avg. Vel. (ft/s)		3.60	
Max Chl Dpth (ft)	2.05	Hydr. Depth (ft)		1.07	
Conv. Total (cfs)	643.1	Conv. (cfs)		643.1	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		31.40	
Min Ch El (ft)	6912.13	Shear (lb/sq ft)		2.30	
Alpha	1.00	Stream Power (lb/ft s)		8.31	
Frctn Loss (ft)	1.63	Cum Volume (acre-ft)		0.21	
C & E Loss (ft)	0.03	Cum SA (acres)		0.15	

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 500 Profile: PF 1

E.G. Elev (ft)	6912.72	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.09	Wt. n-Val.		0.080	
W.S. Elev (ft)	6912.63	Reach Len. (ft)	87.00	100.00	107.00
Crit W.S. (ft)		Flow Area (sq ft)		51.05	
E.G. Slope (ft/ft)	0.009428	Area (sq ft)		51.05	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	33.77	Top Width (ft)		33.77	
Vel Total (ft/s)	2.35	Avg. Vel. (ft/s)		2.35	
Max Chl Dpth (ft)	2.74	Hydr. Depth (ft)		1.51	
Conv. Total (cfs)	1235.9	Conv. (cfs)		1235.9	
Length Wtd. (ft)	100.00	Wetted Per. (ft)		34.30	
Min Ch El (ft)	6909.89	Shear (lb/sq ft)		0.88	
Alpha	1.00	Stream Power (lb/ft s)		2.06	
Frctn Loss (ft)	1.10	Cum Volume (acre-ft)		0.11	
C & E Loss (ft)	0.00	Cum SA (acres)		0.07	

Plan: Plan 01 CHAN EAST PR chan-east-pr RS: 400 Profile: PF 1

E.G. Elev (ft)	6911.61	Element	Left OB	Channel	Right OB
Vel Head (ft)	0.11	Wt. n-Val.		0.080	
W.S. Elev (ft)	6911.50	Reach Len. (ft)			
Crit W.S. (ft)	6910.69	Flow Area (sq ft)		44.70	
E.G. Slope (ft/ft)	0.013008	Area (sq ft)		44.70	
Q Total (cfs)	120.00	Flow (cfs)		120.00	
Top Width (ft)	30.55	Top Width (ft)		30.55	
Vel Total (ft/s)	2.68	Avg. Vel. (ft/s)		2.68	
Max Chl Dpth (ft)	2.69	Hydr. Depth (ft)		1.46	
Conv. Total (cfs)	1052.2	Conv. (cfs)		1052.2	
Length Wtd. (ft)		Wetted Per. (ft)		31.33	
Min Ch El (ft)	6908.81	Shear (lb/sq ft)		1.16	
Alpha	1.00	Stream Power (lb/ft s)		3.11	
Frctn Loss (ft)		Cum Volume (acre-ft)			
C & E Loss (ft)		Cum SA (acres)			

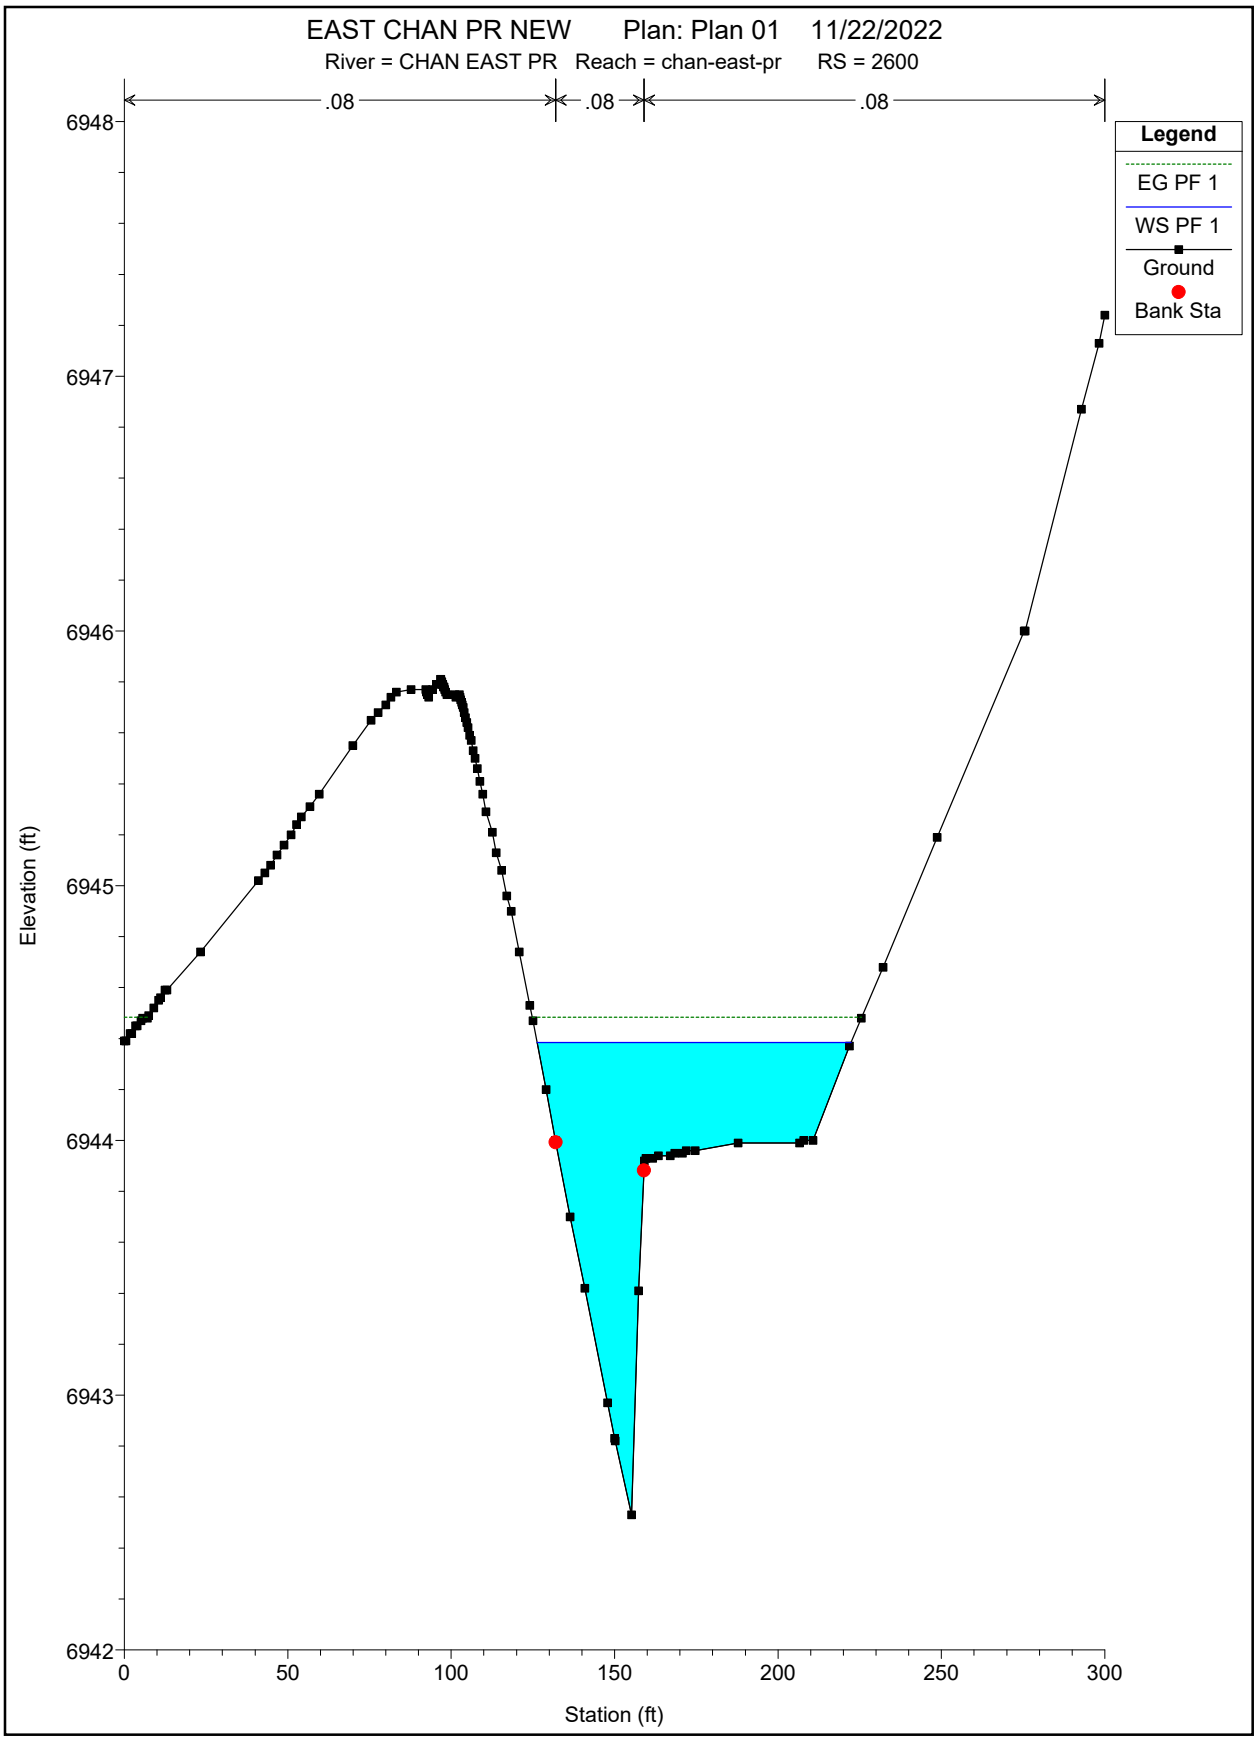
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2600
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6948
6947
6946
6945
6944
6943
6942
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

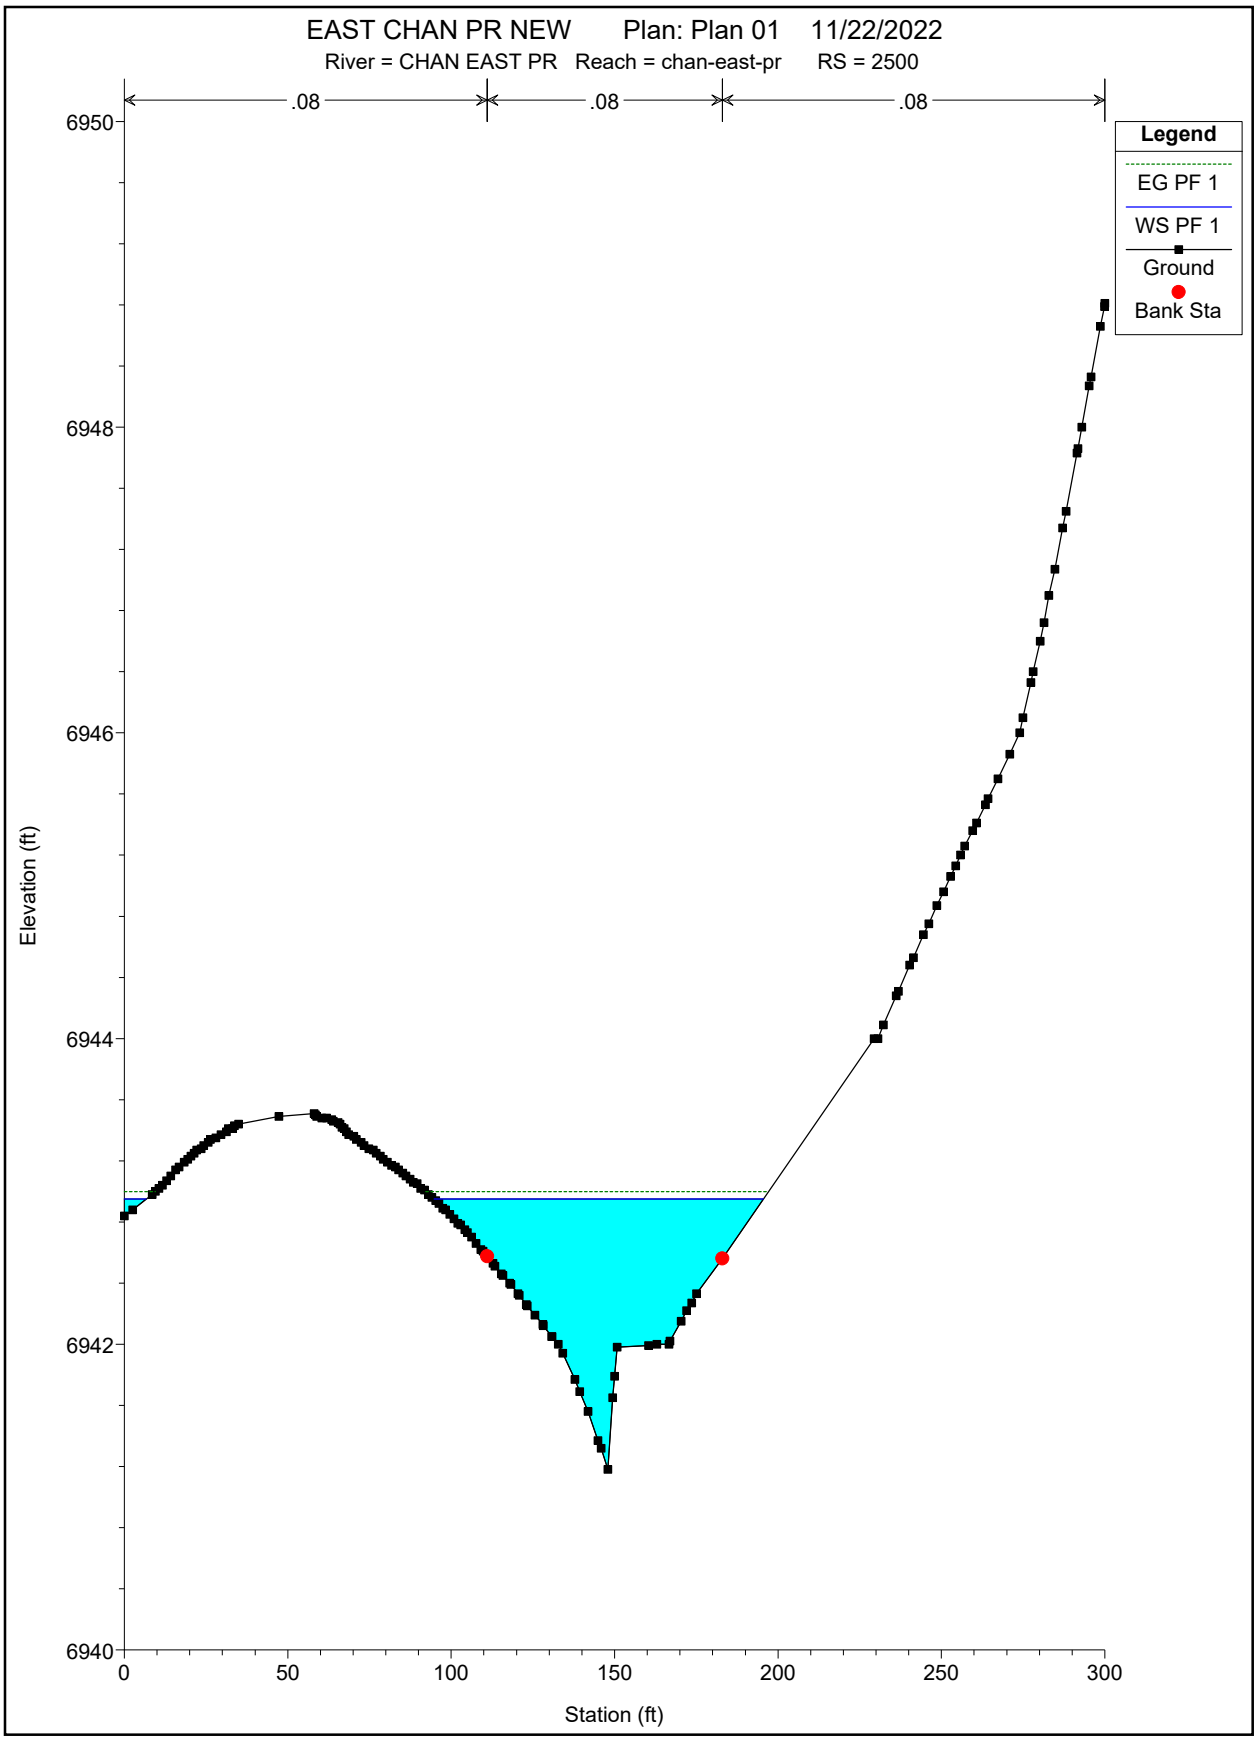
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2500
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6950
6948
6946
6944
6942
6940
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

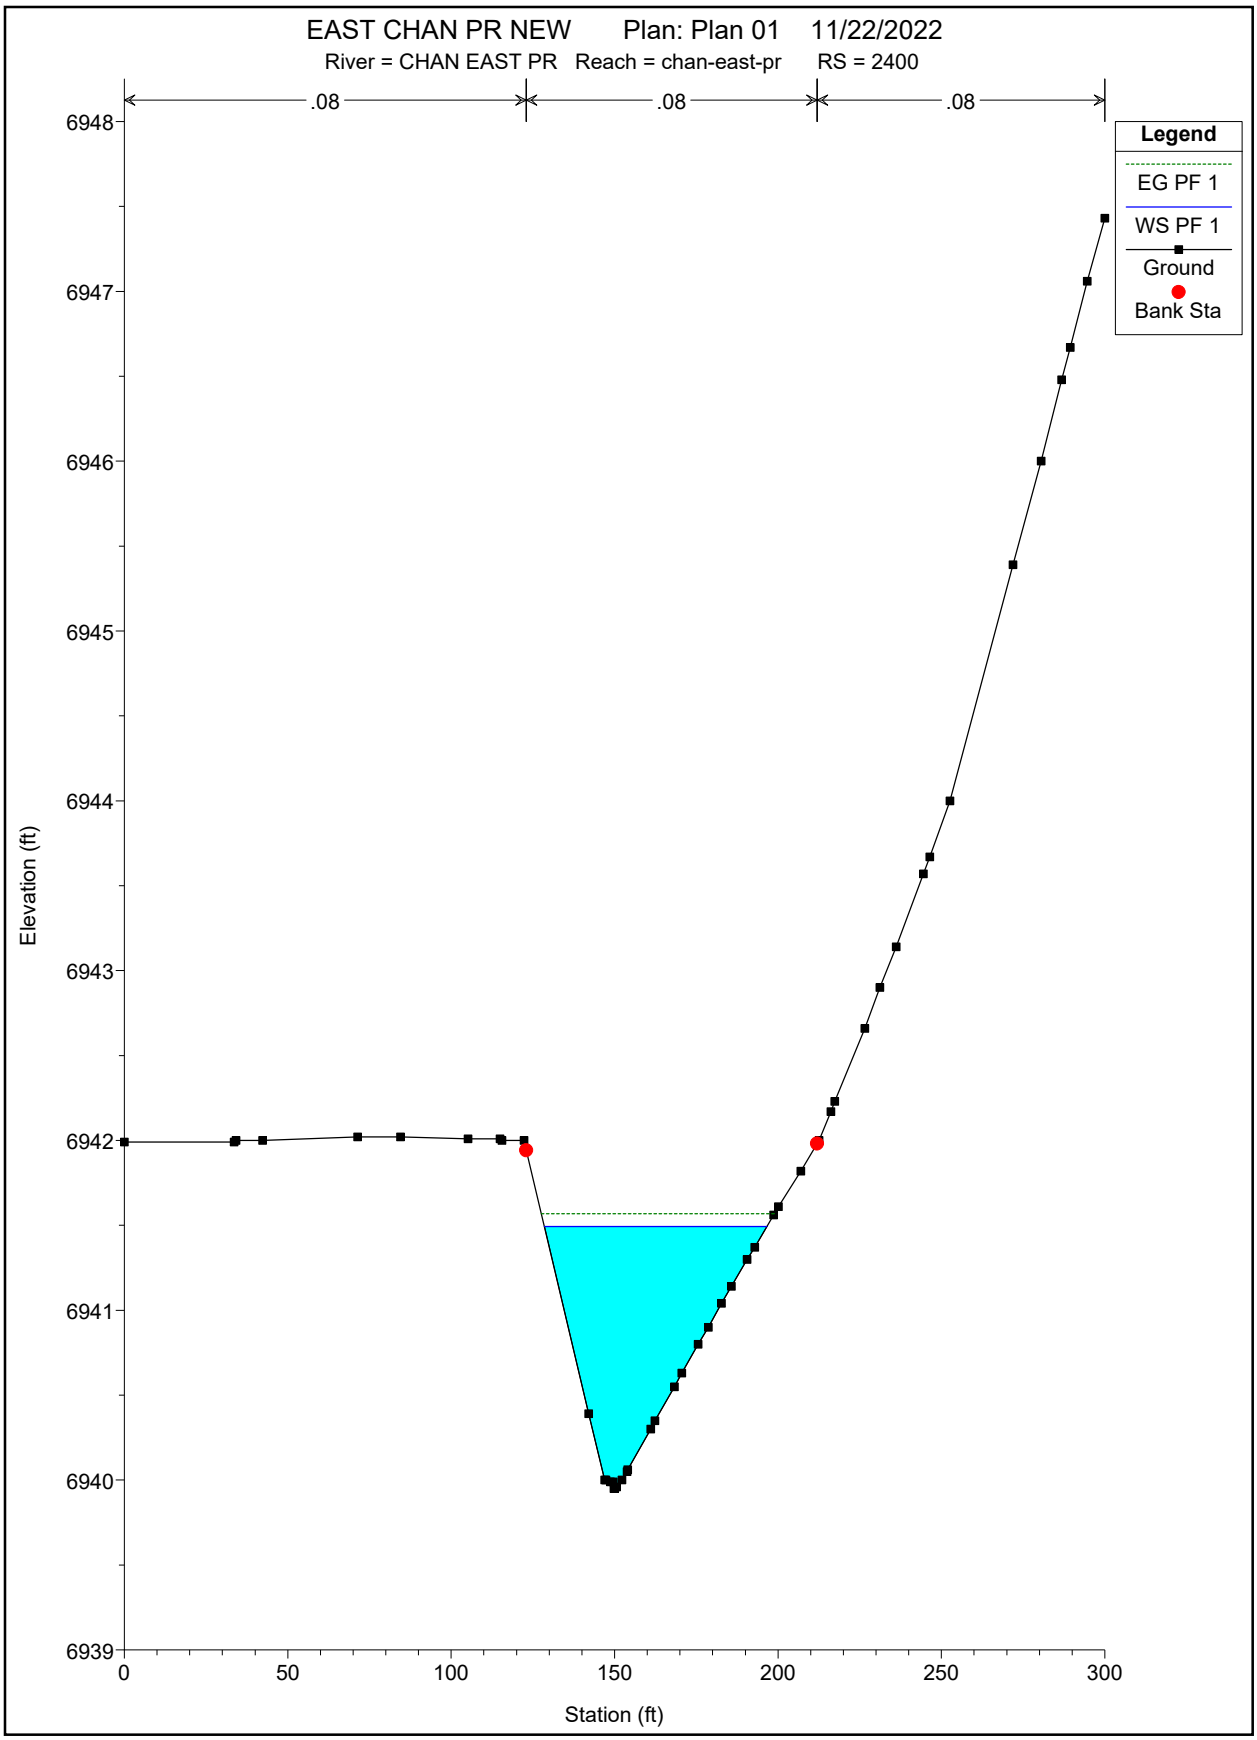
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2400
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6948
6947
6946
6945
6944
6943
6942
6941
6940
6939
0
50
100
150
200
250
300
Station (ft)

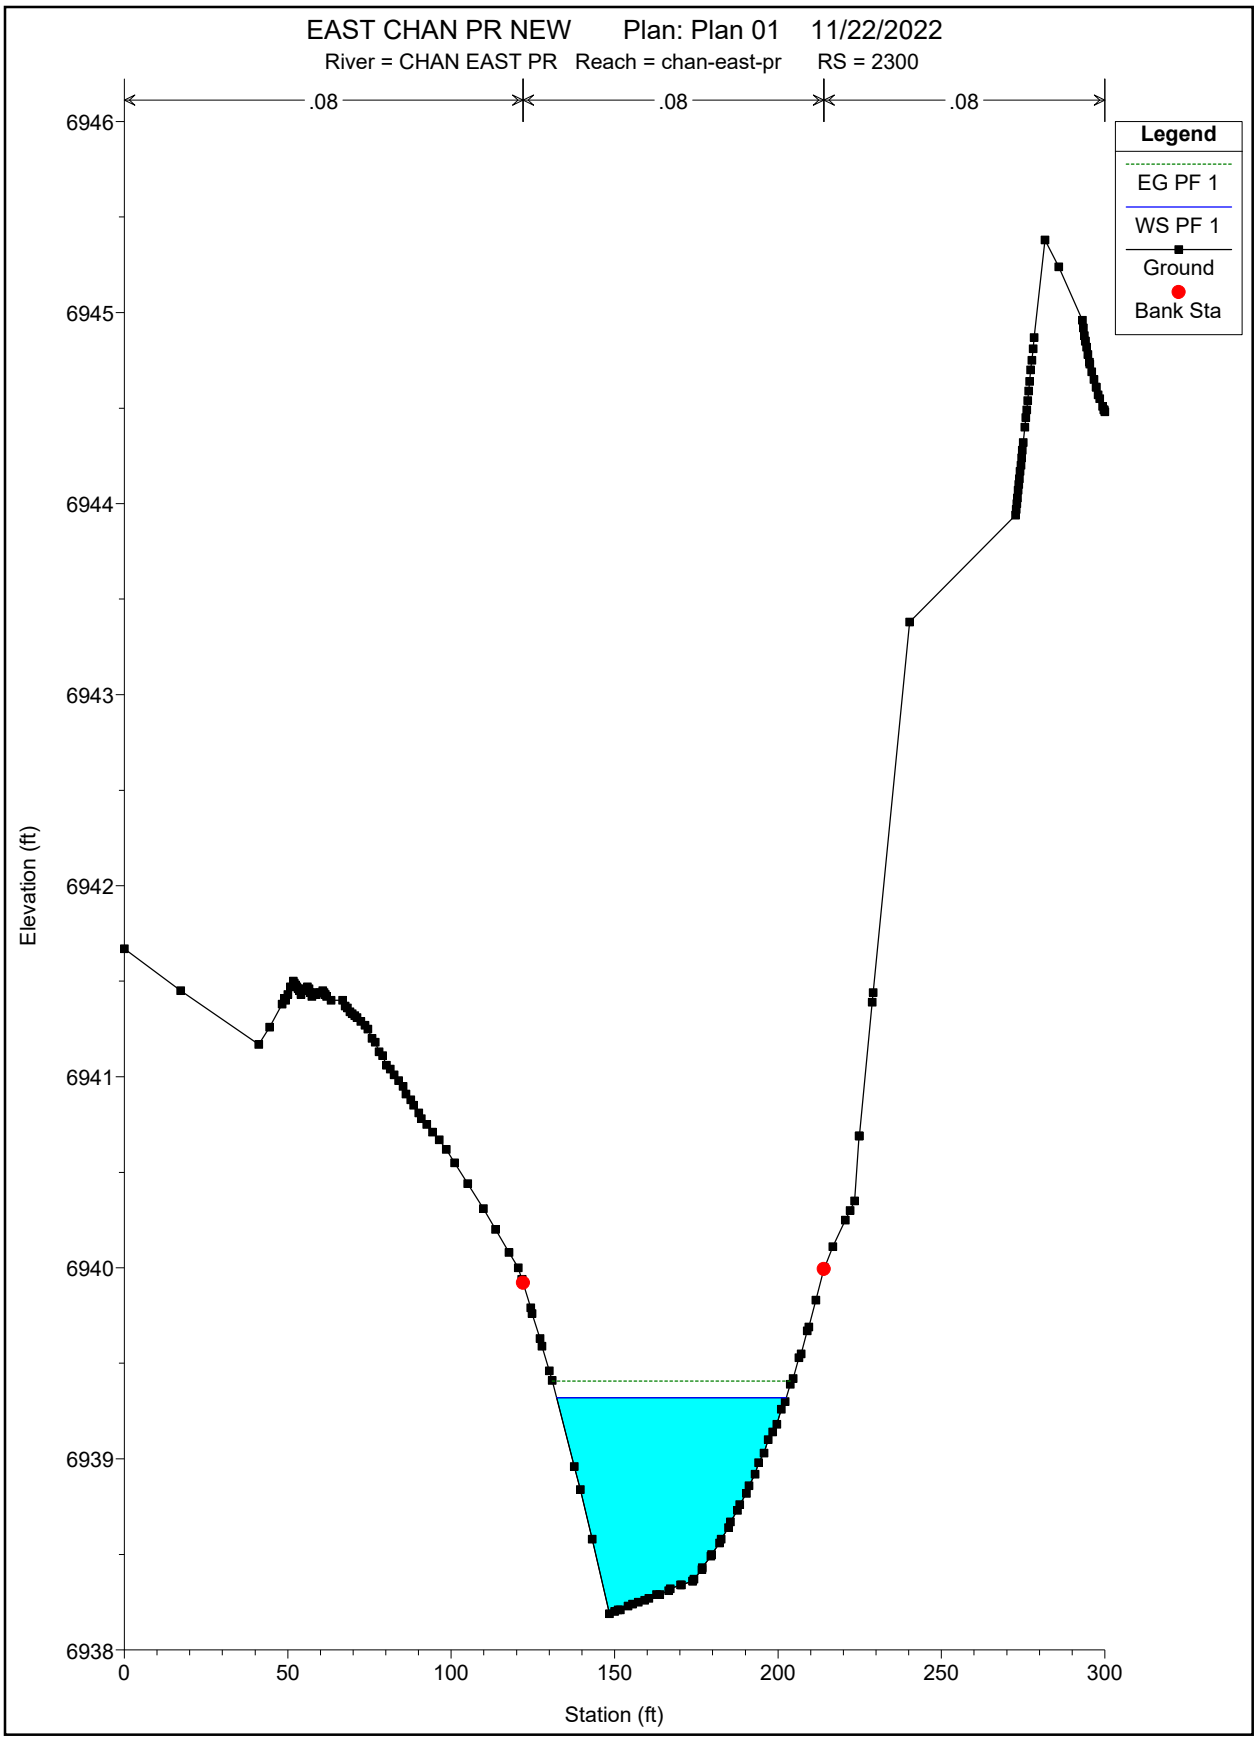
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2300
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6946
6945
6944
6943
6942
6941
6940
6939
6938
0
50
100
150
200
250
300
Station (ft)

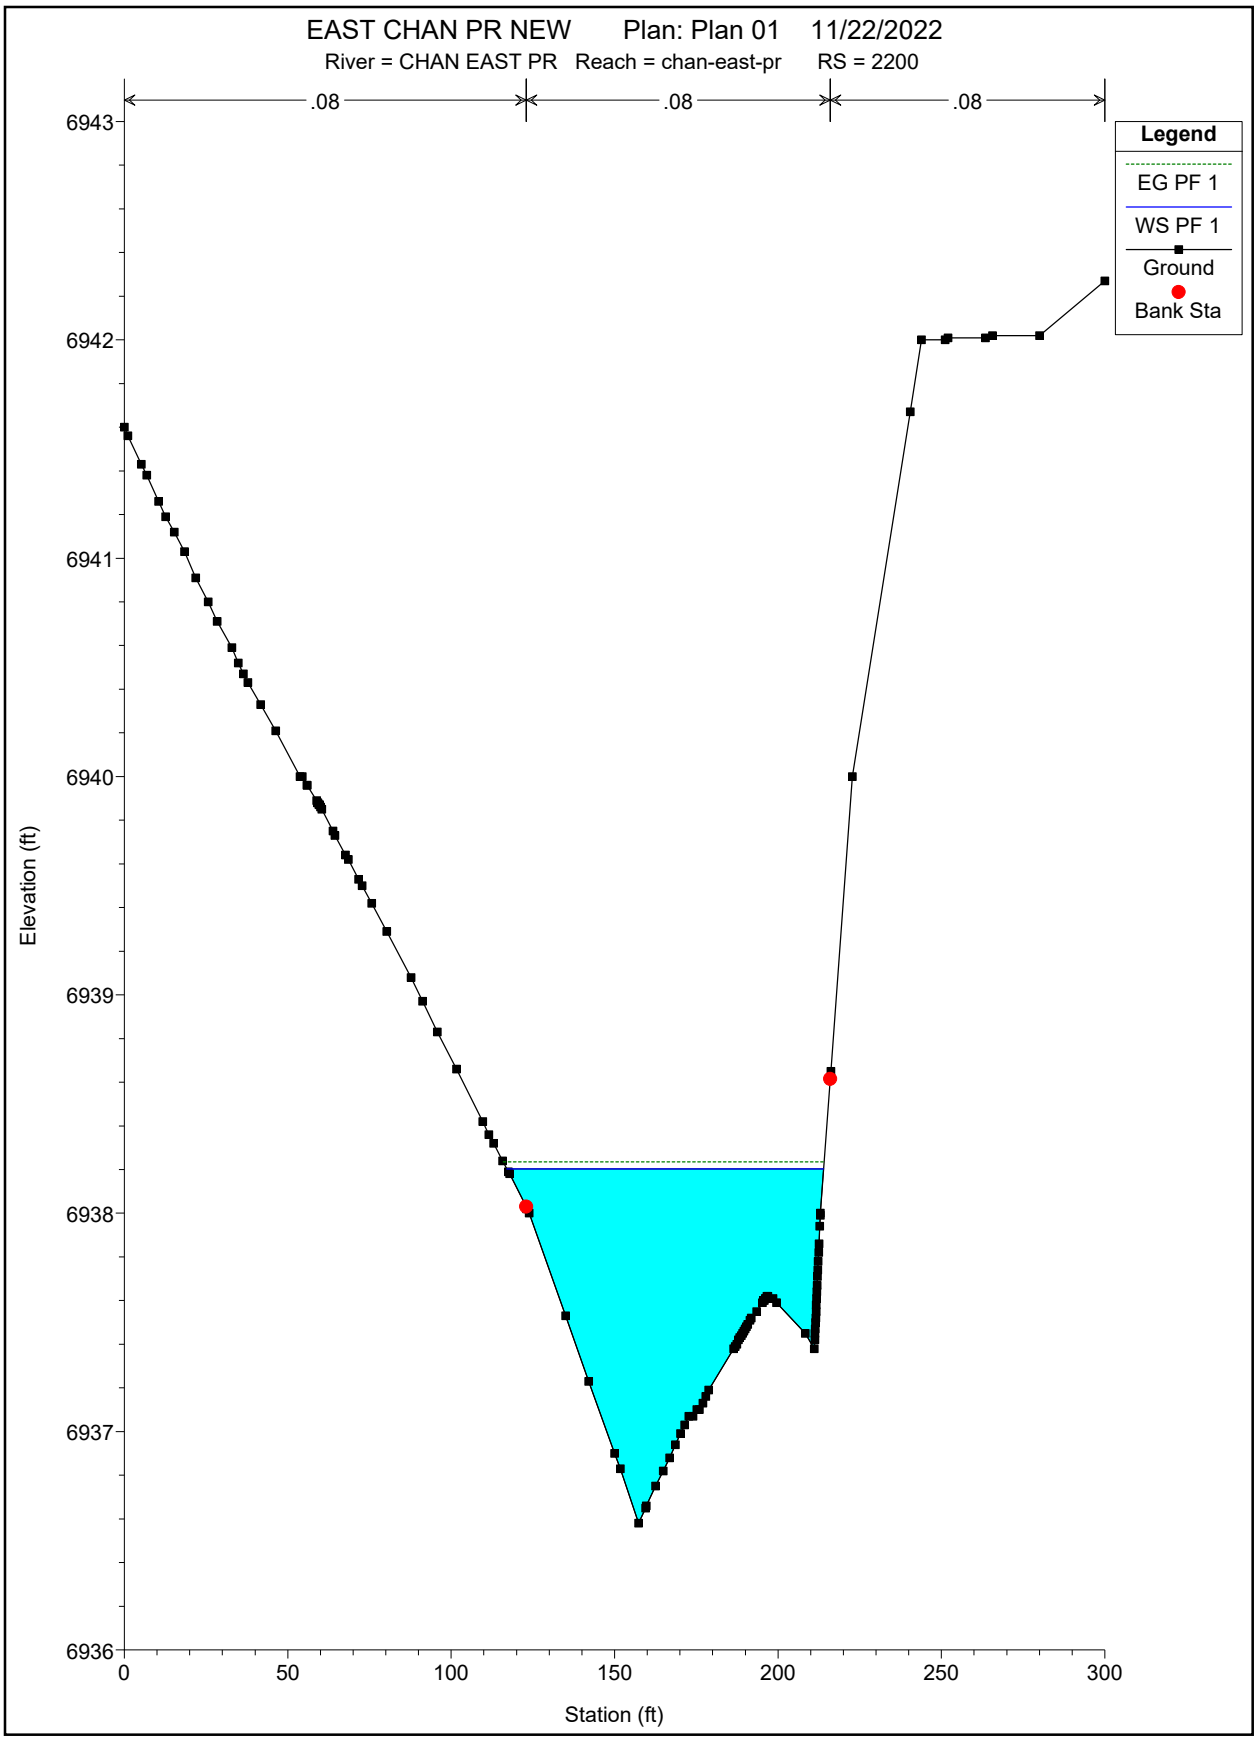
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2200
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6943
6942
6941
6940
6939
6938
6937
6936
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

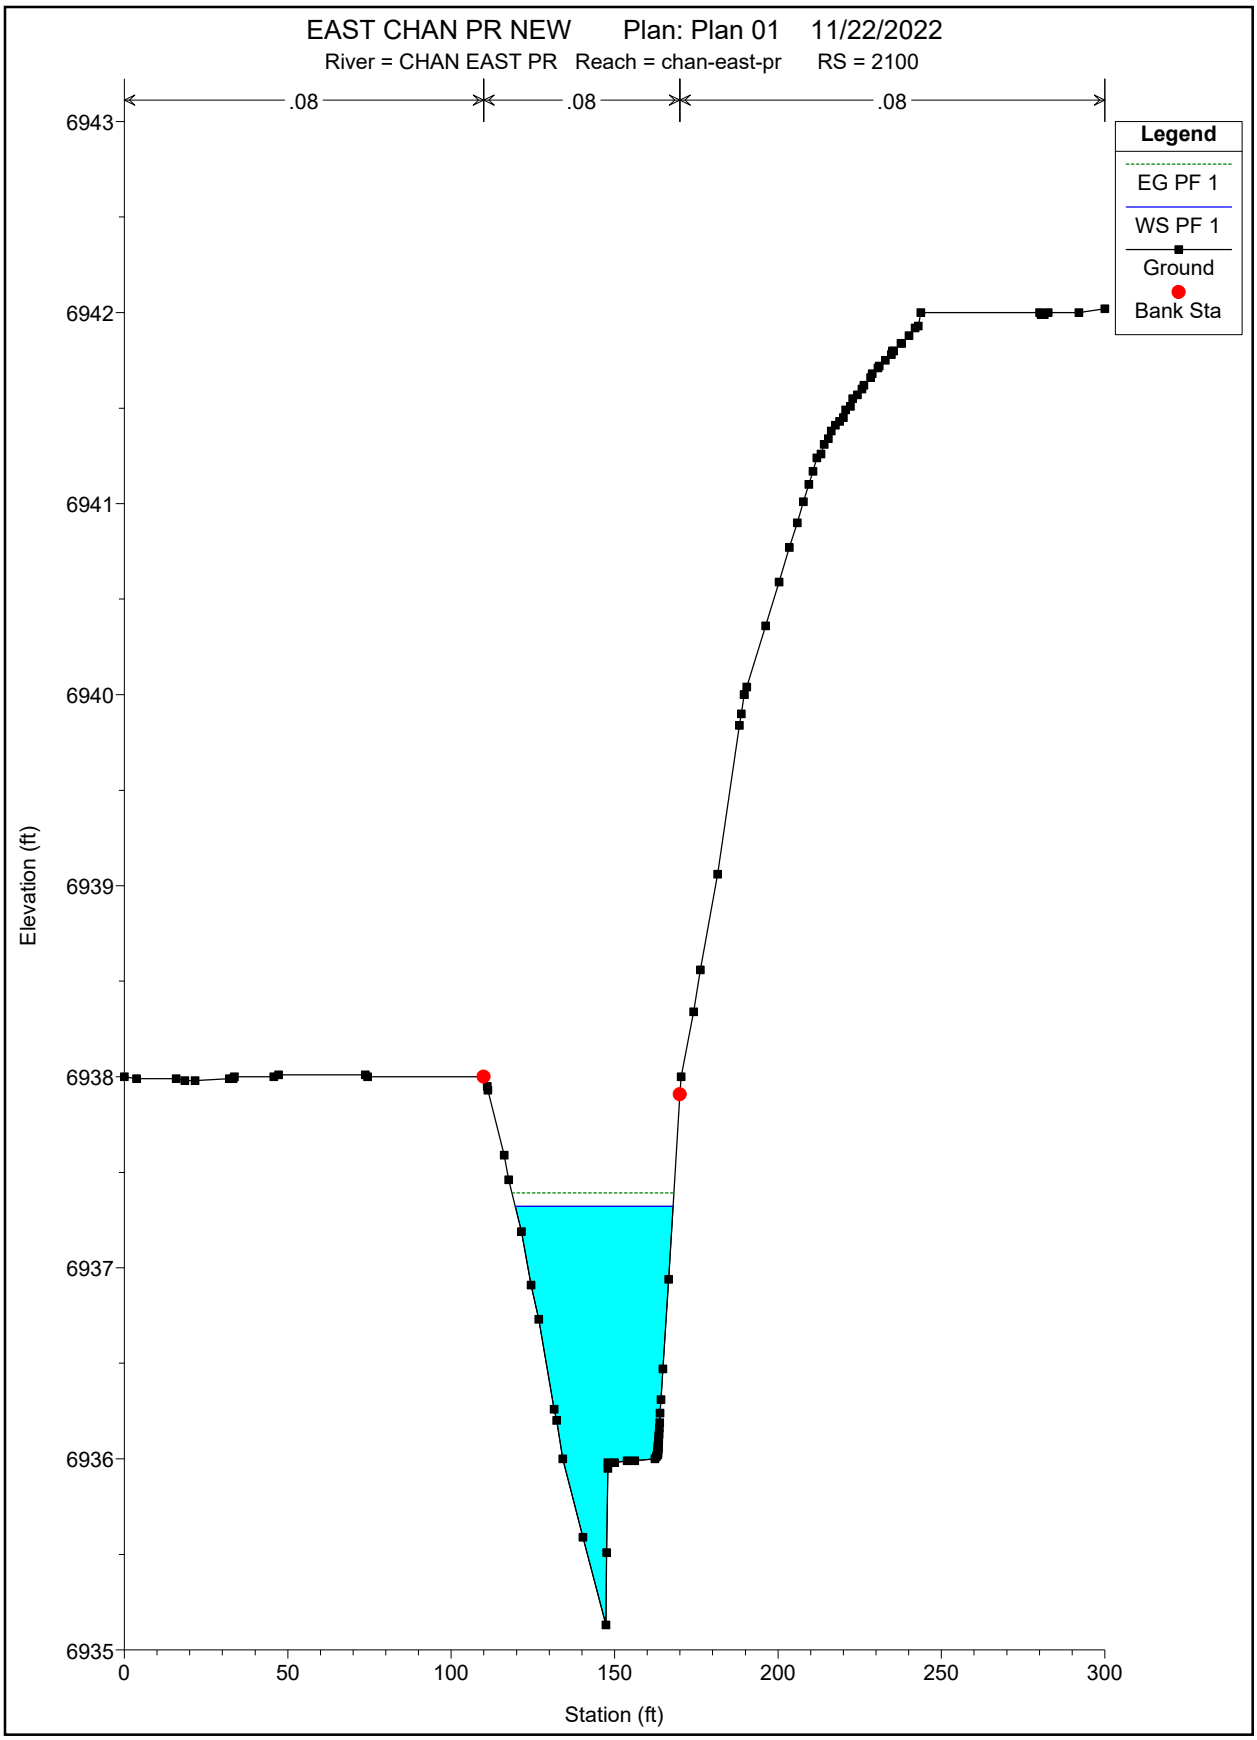
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2100
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6943
6942
6941
6940
6939
6938
6937
6936
6935
0
50
100
150
200
250
300
Station (ft)

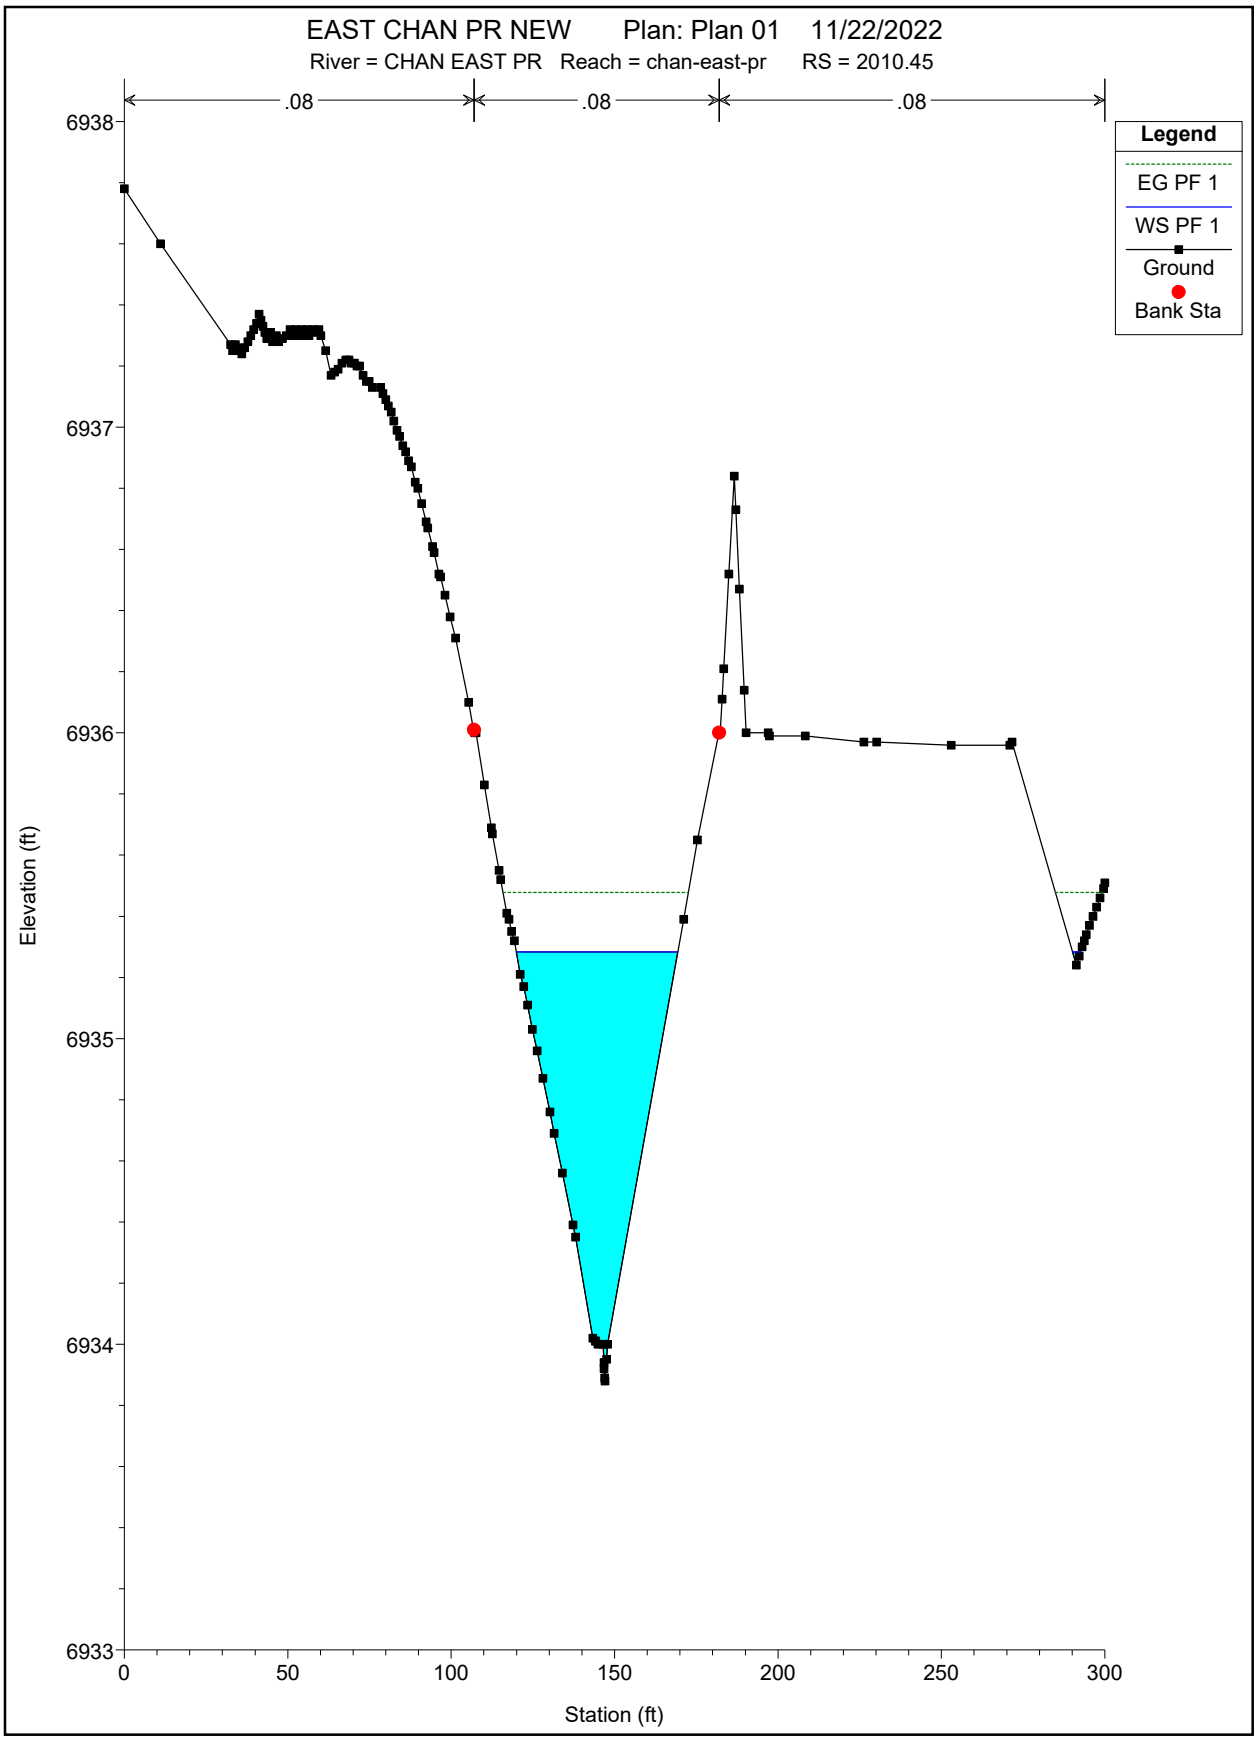
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 2010.45
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6938
6937
6936
6935
6934
6933
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

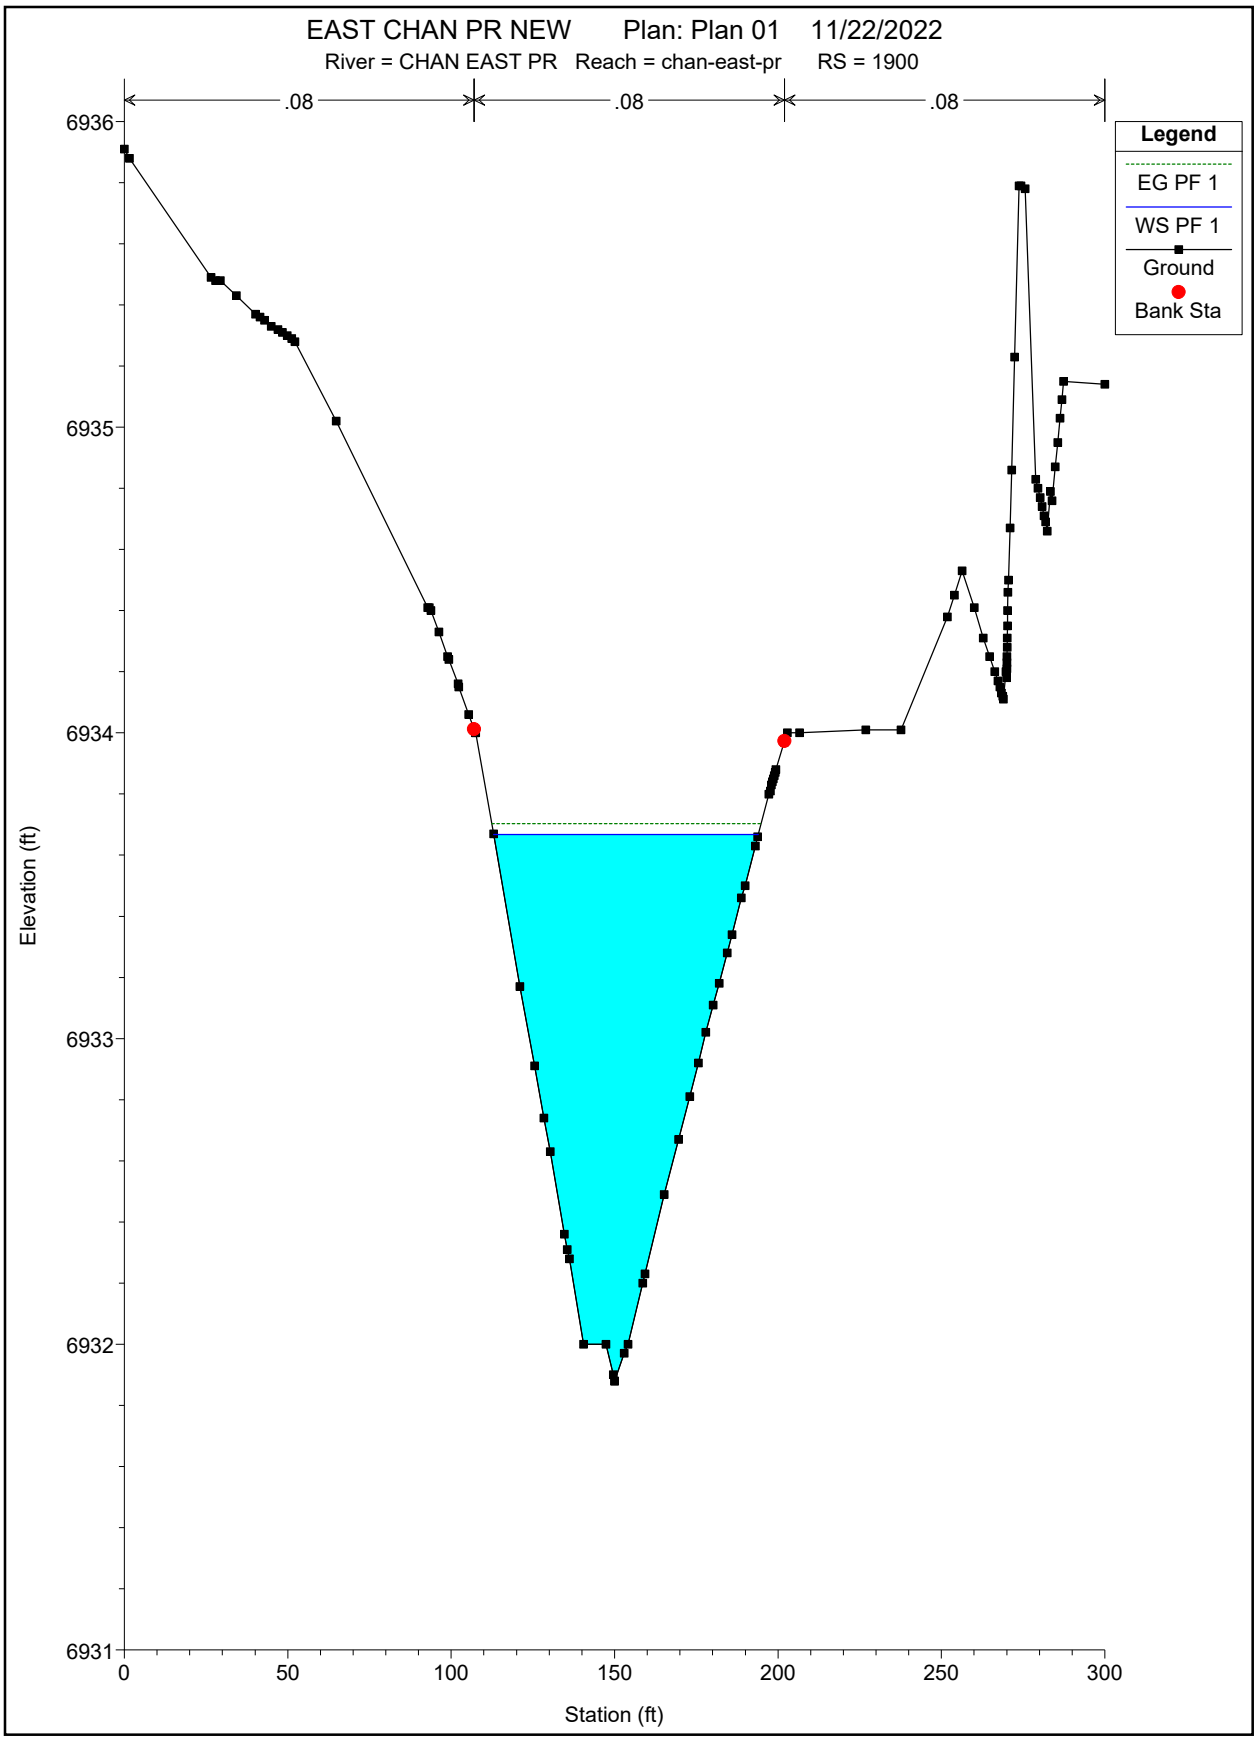
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1900
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6936
6935
6934
6933
6932
6931
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

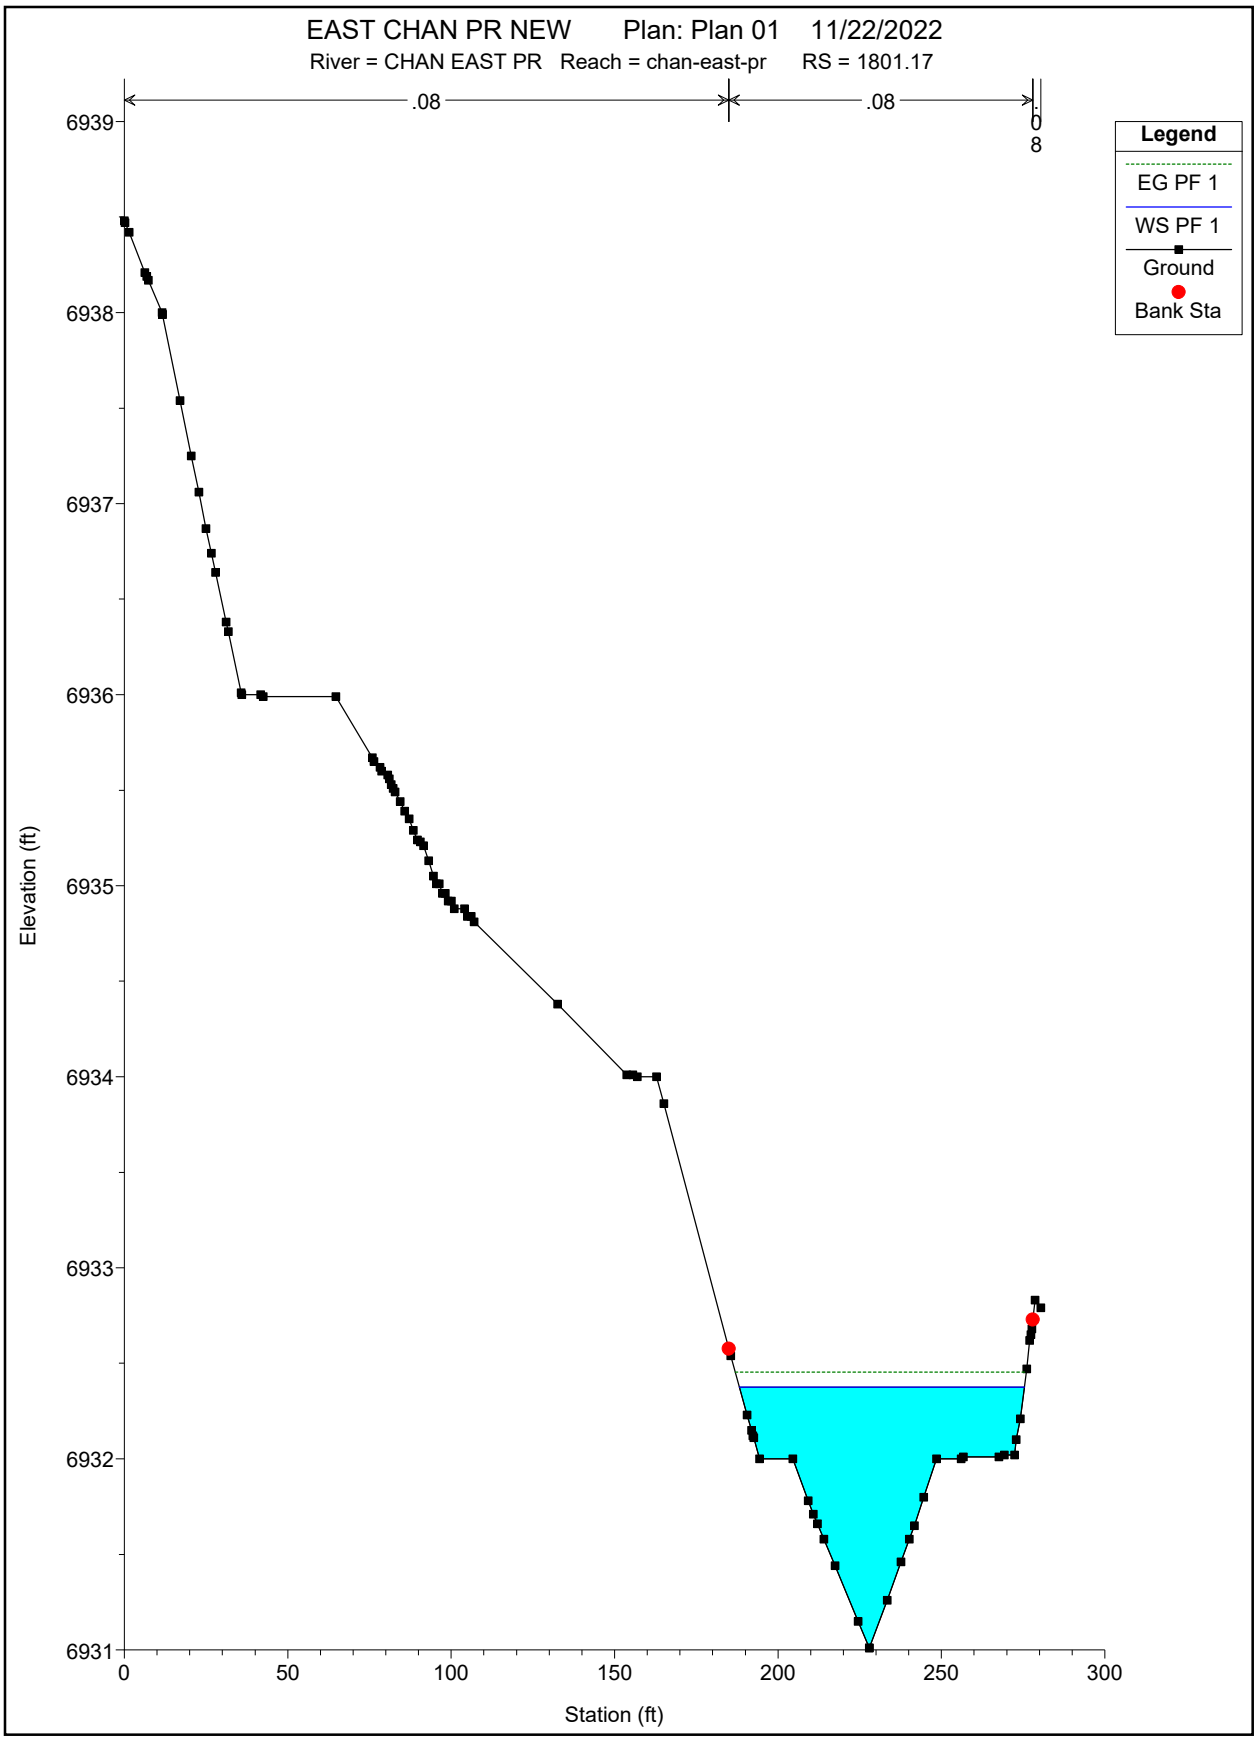
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1801.17
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6939
6938
6937
6936
6935
6934
6933
6932
6931
0
50
100
150
200
250
300
Station (ft)

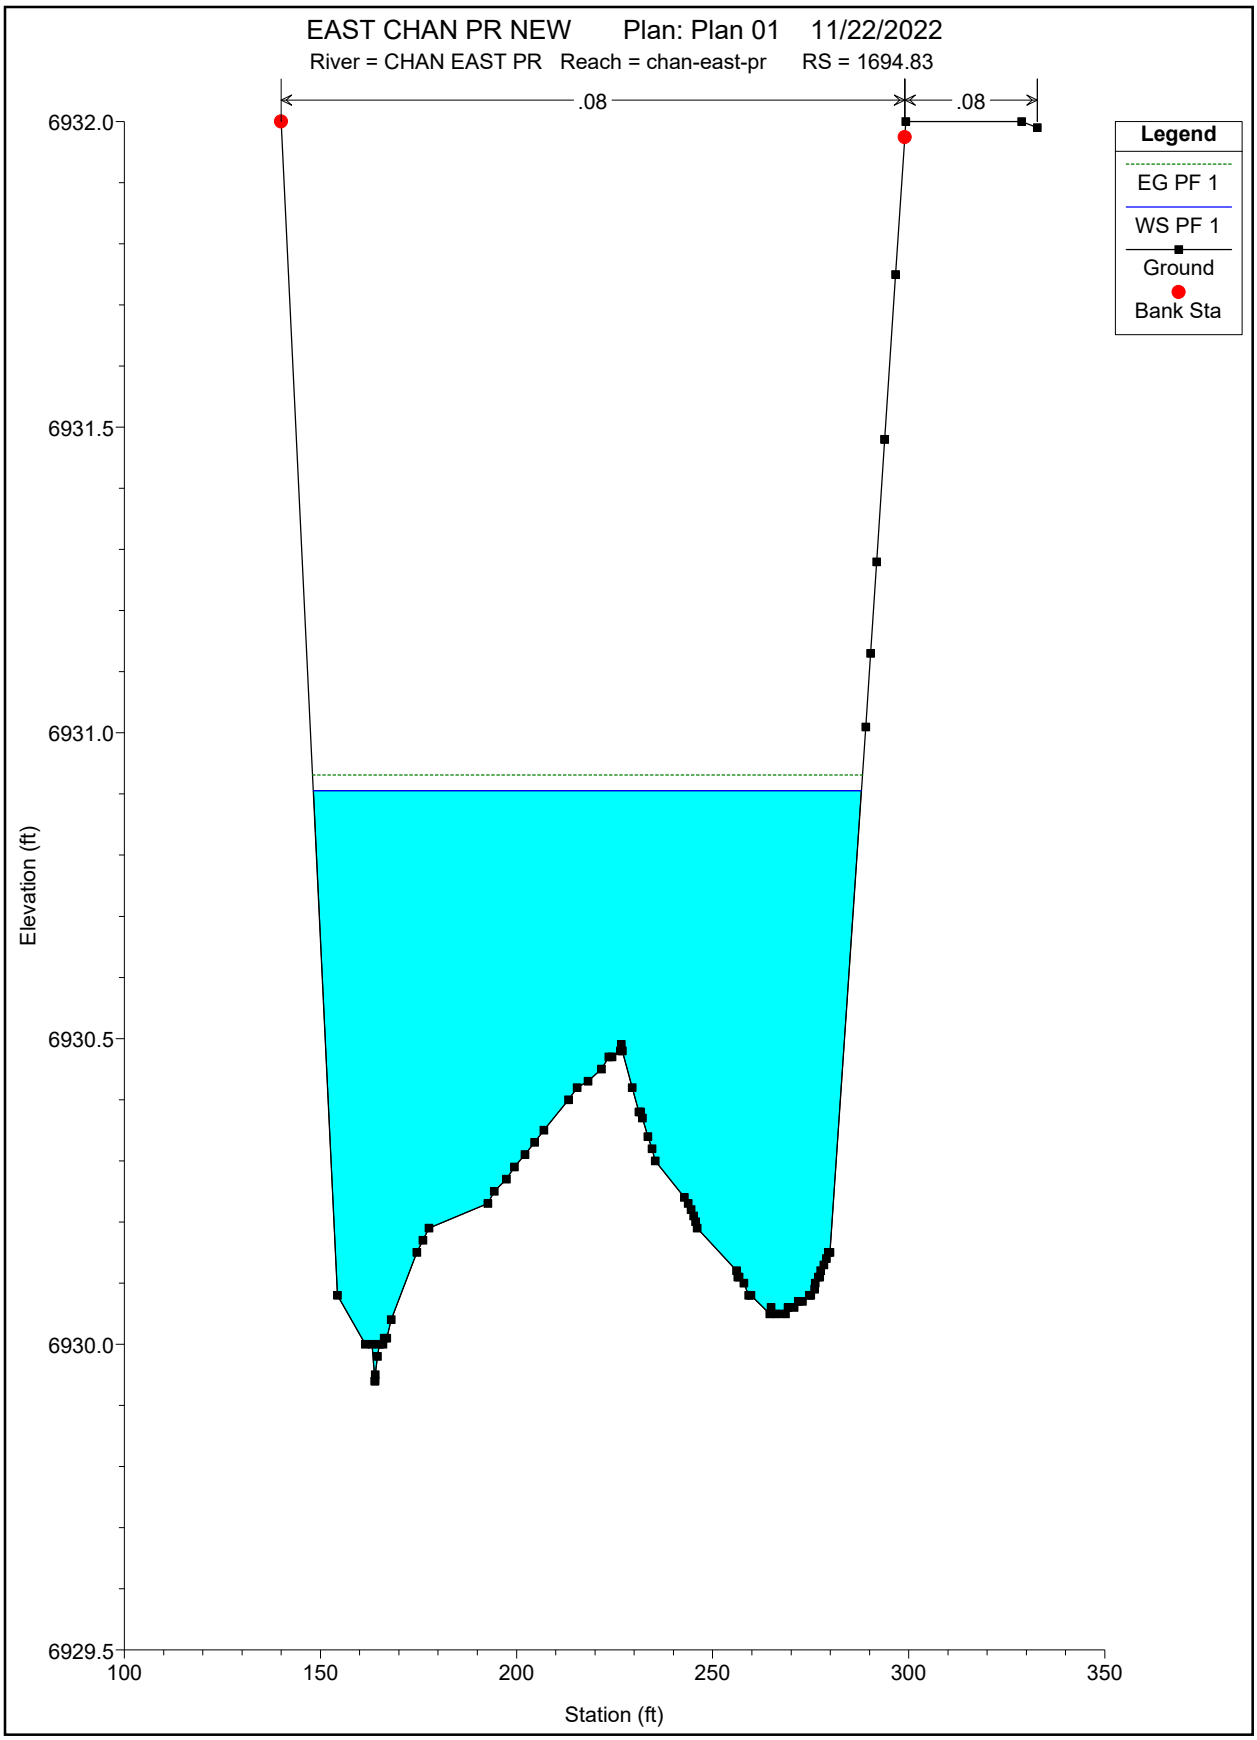
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1694.83
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6932.0
6931.5
6931.0
6930.5
6930.0
6929.5
Elevation (ft)
100
150
200
250
300
350
Station (ft)

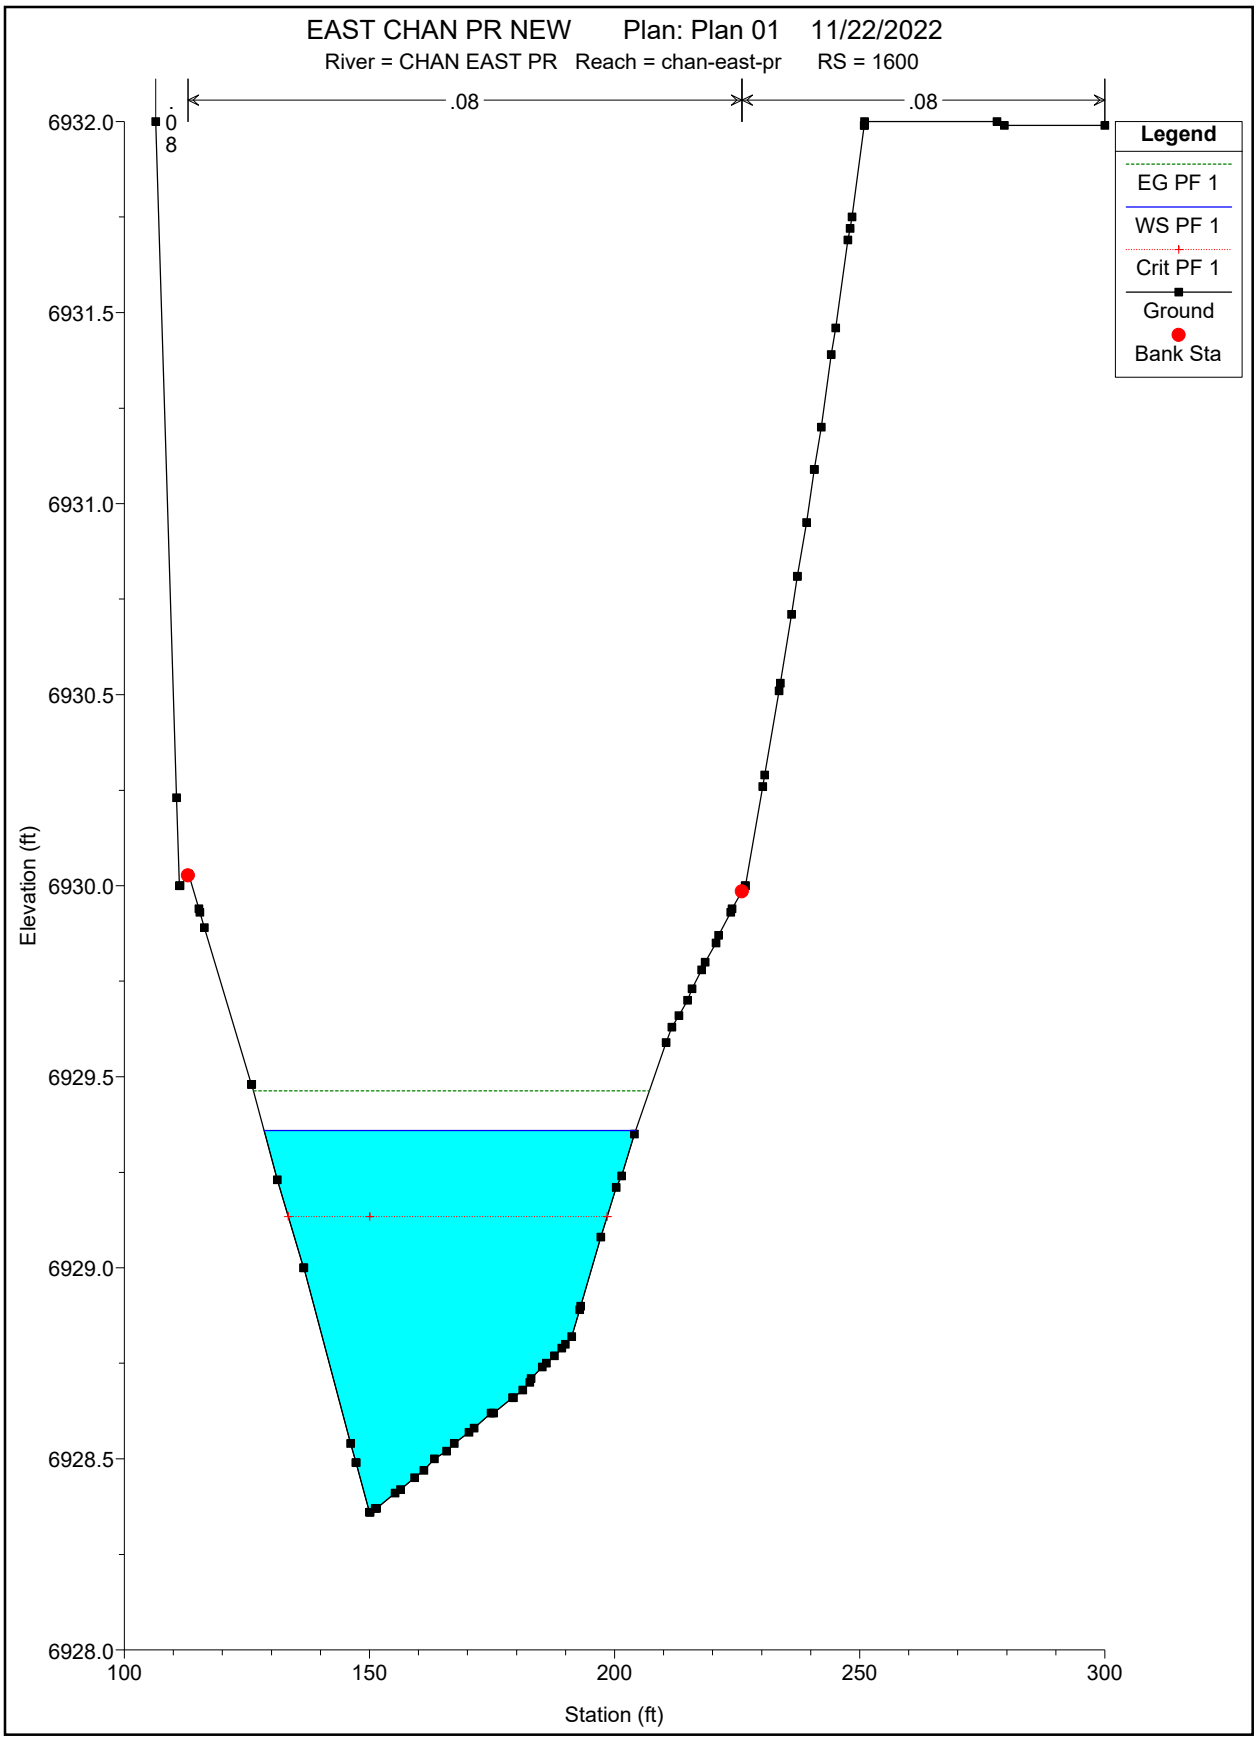
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1600
.08
.08
.08
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6932.0
6931.5
6931.0
6930.5
6930.0
6929.5
6929.0
6928.5
6928.0
Elevation (ft)
100
150
200
250
300
Station (ft)

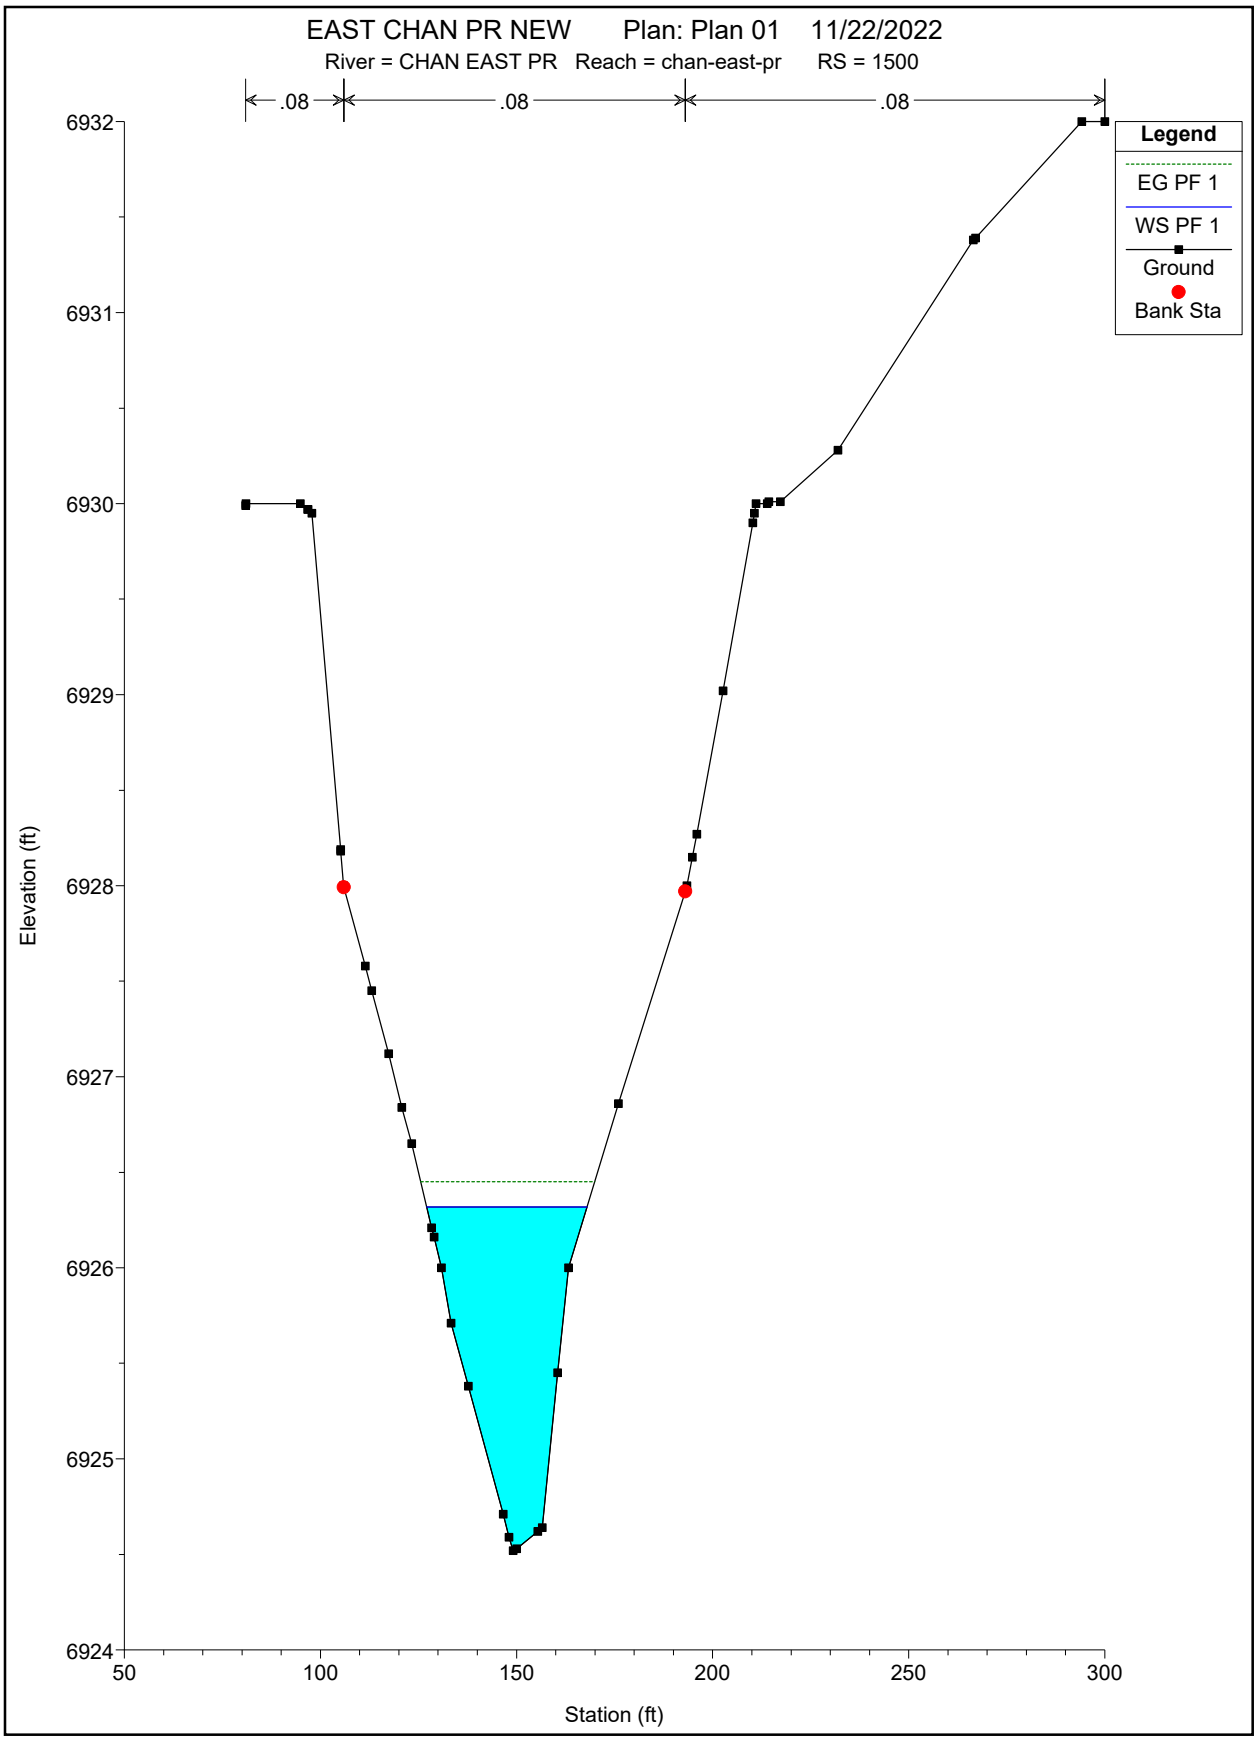
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1500
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6932
6931
6930
6929
6928
6927
6926
6925
6924
Elevation (ft)
50
100
150
200
250
300
Station (ft)

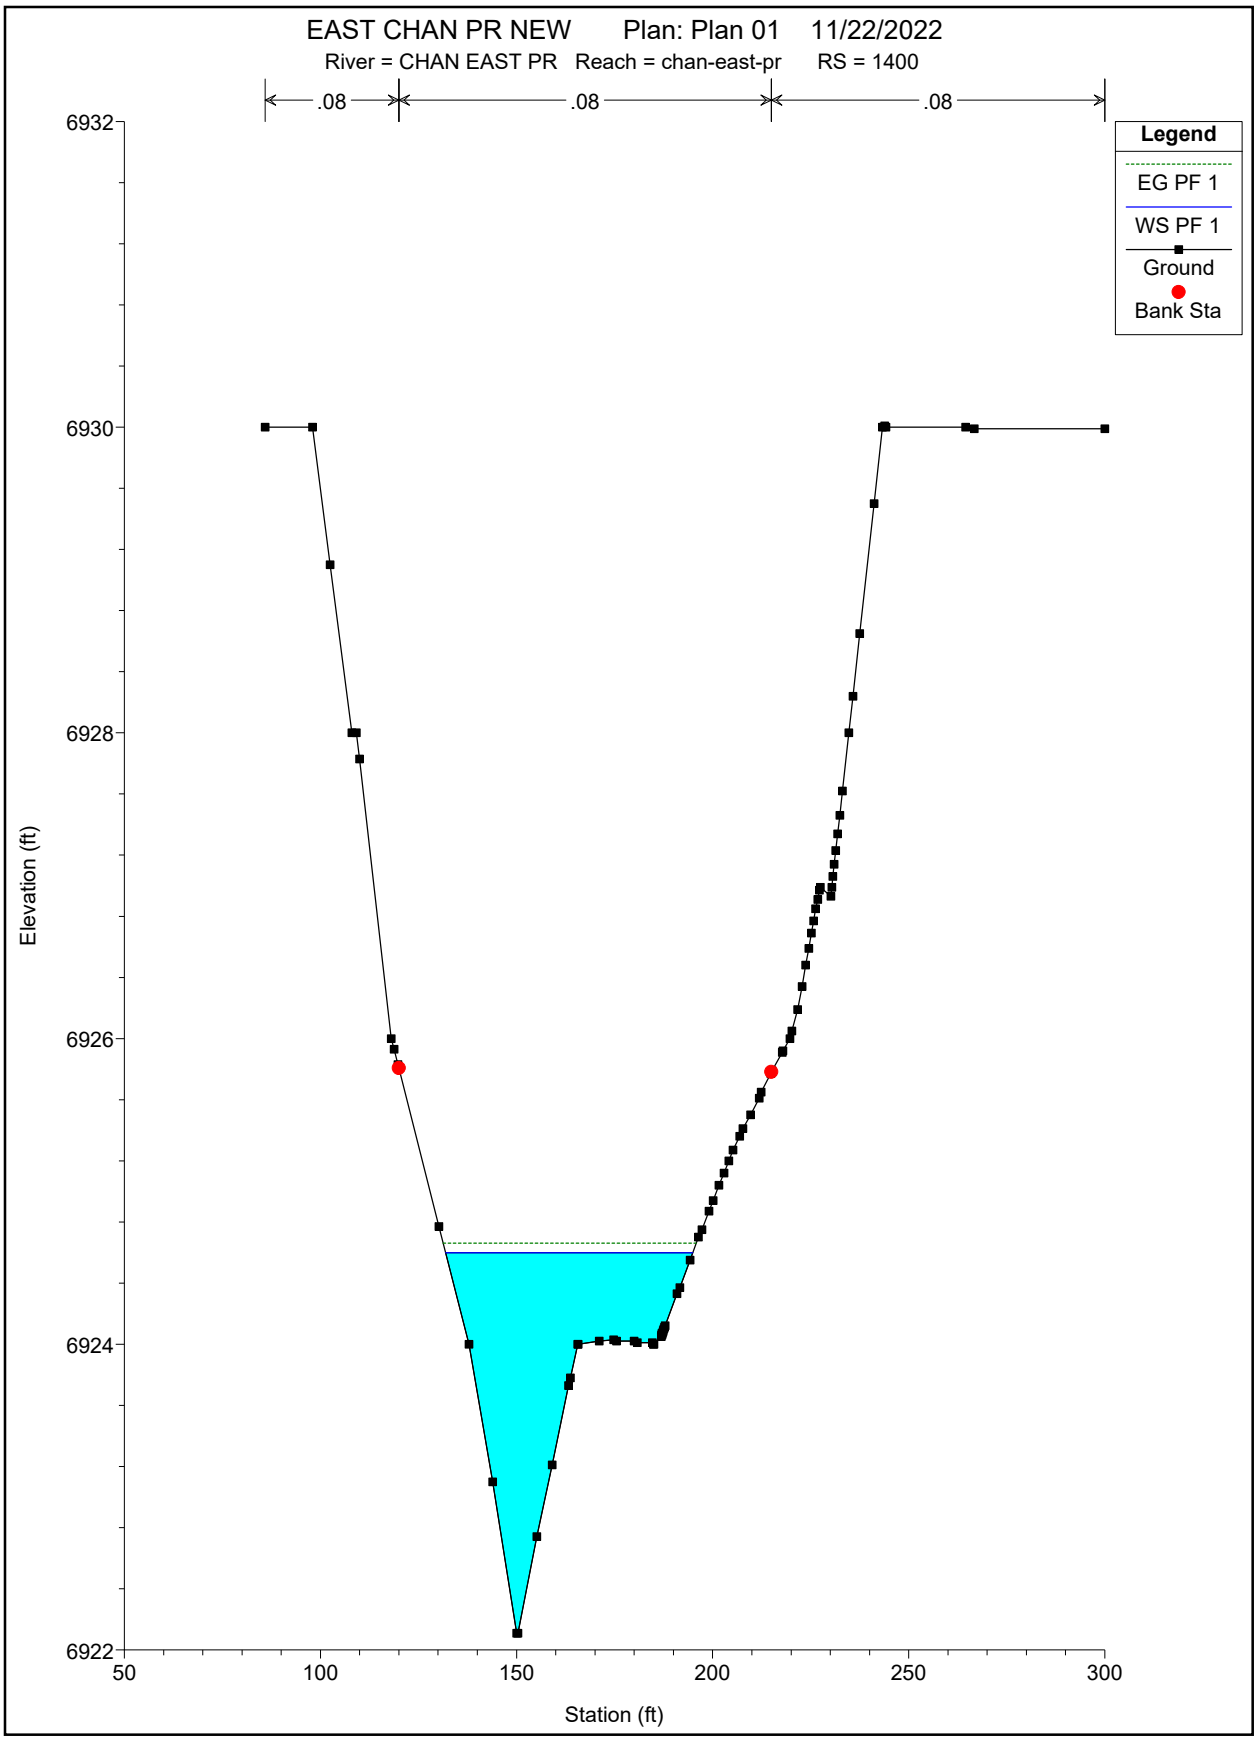
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1400
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6932
6930
6928
6926
6924
6922
Elevation (ft)
50
100
150
200
250
300
Station (ft)

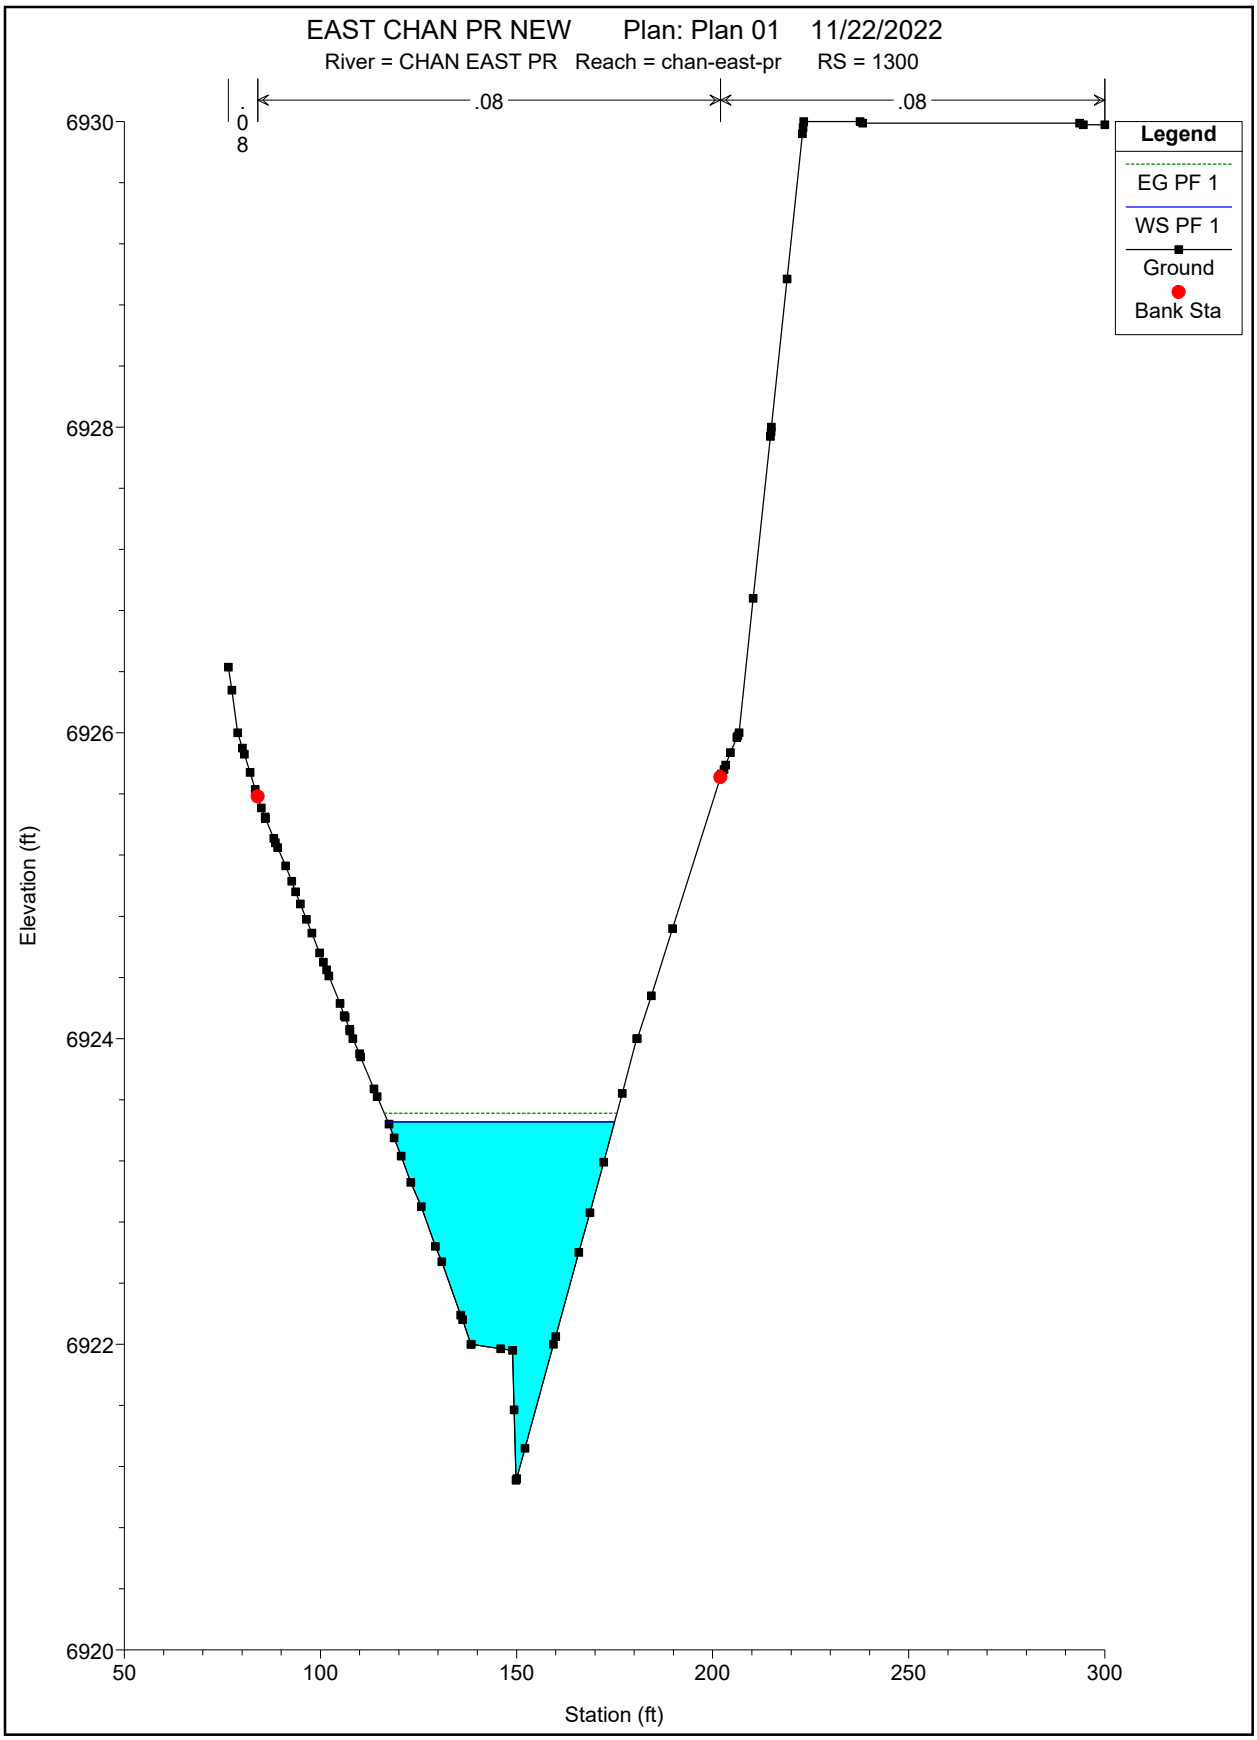
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1300
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6930
6928
6926
6924
6922
6920
Elevation (ft)
50
100
150
200
250
300
Station (ft)

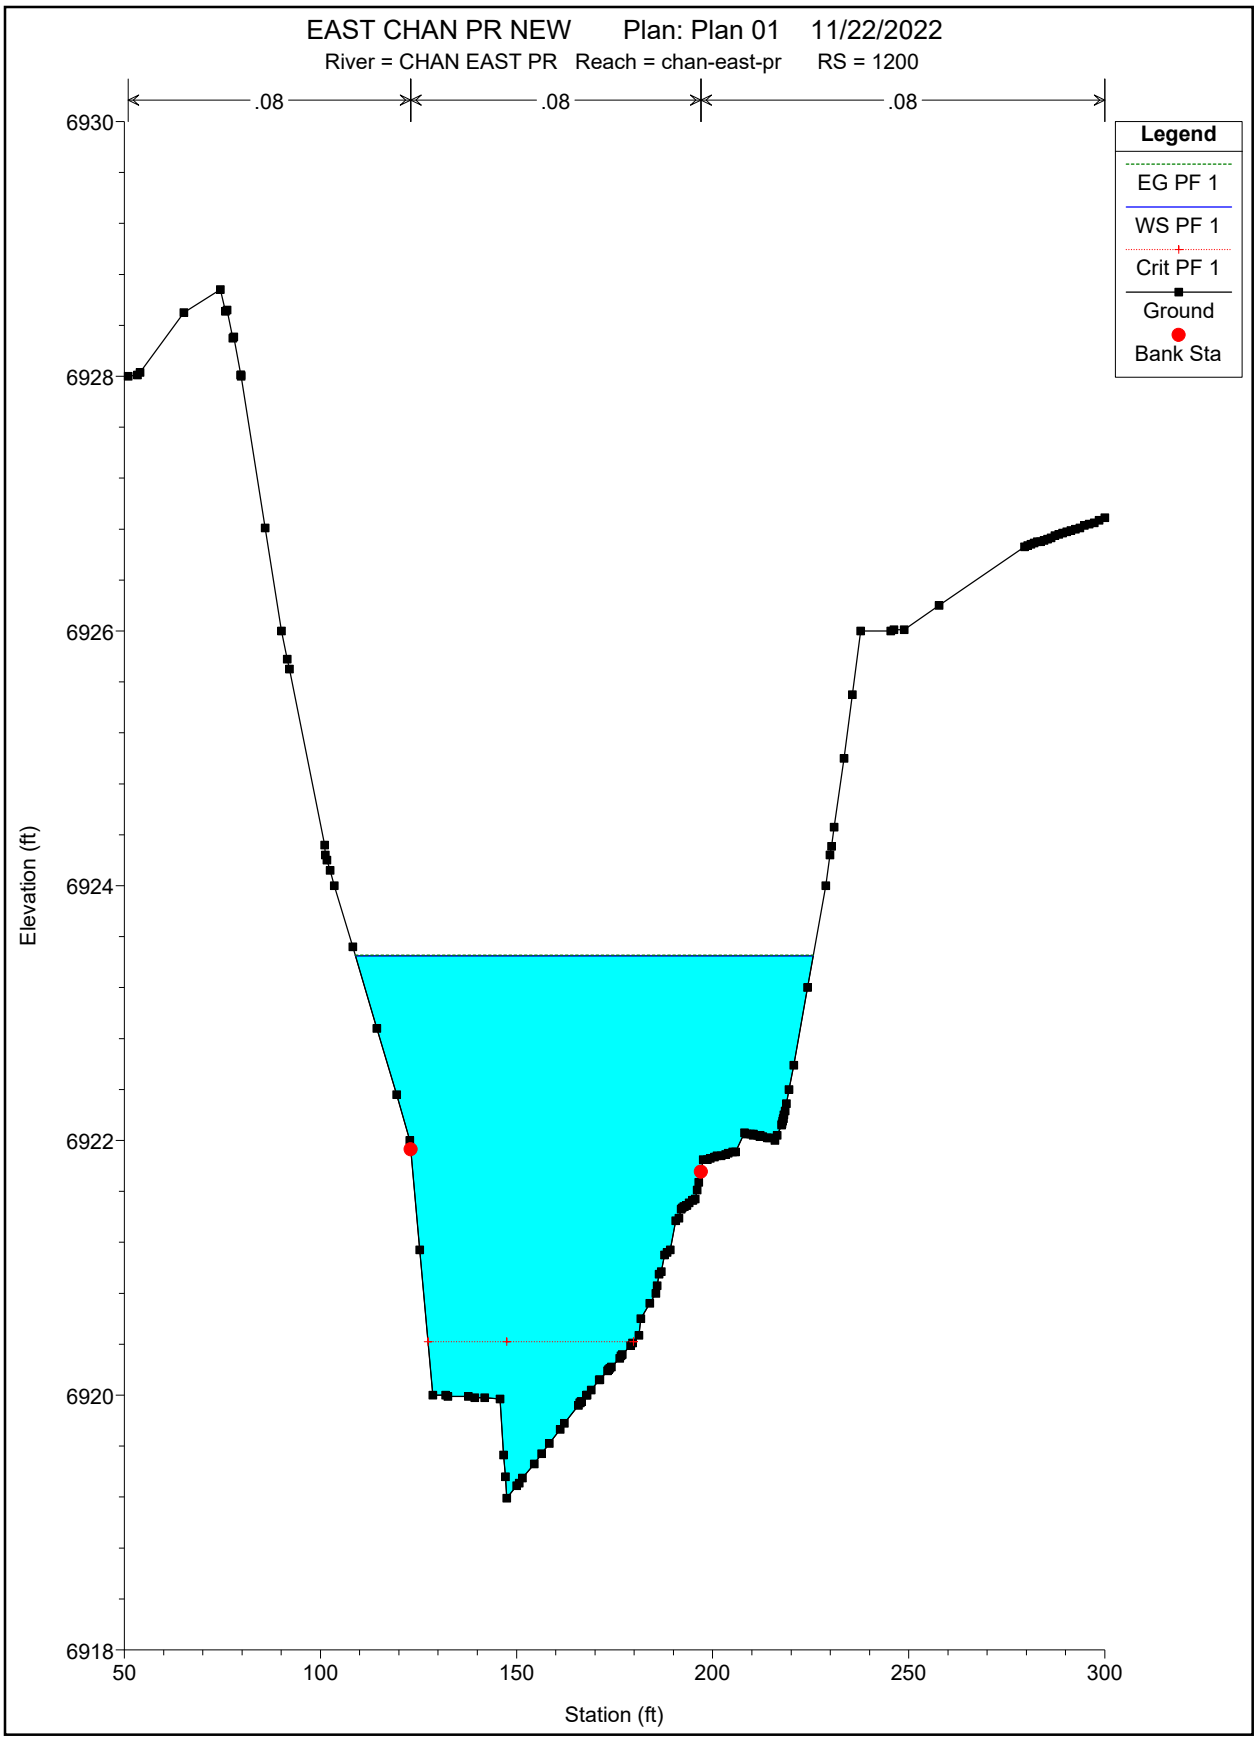
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1200
.08
.08
.08
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6930
6928
6926
6924
6922
6920
6918
50
100
150
200
250
300
Station (ft)

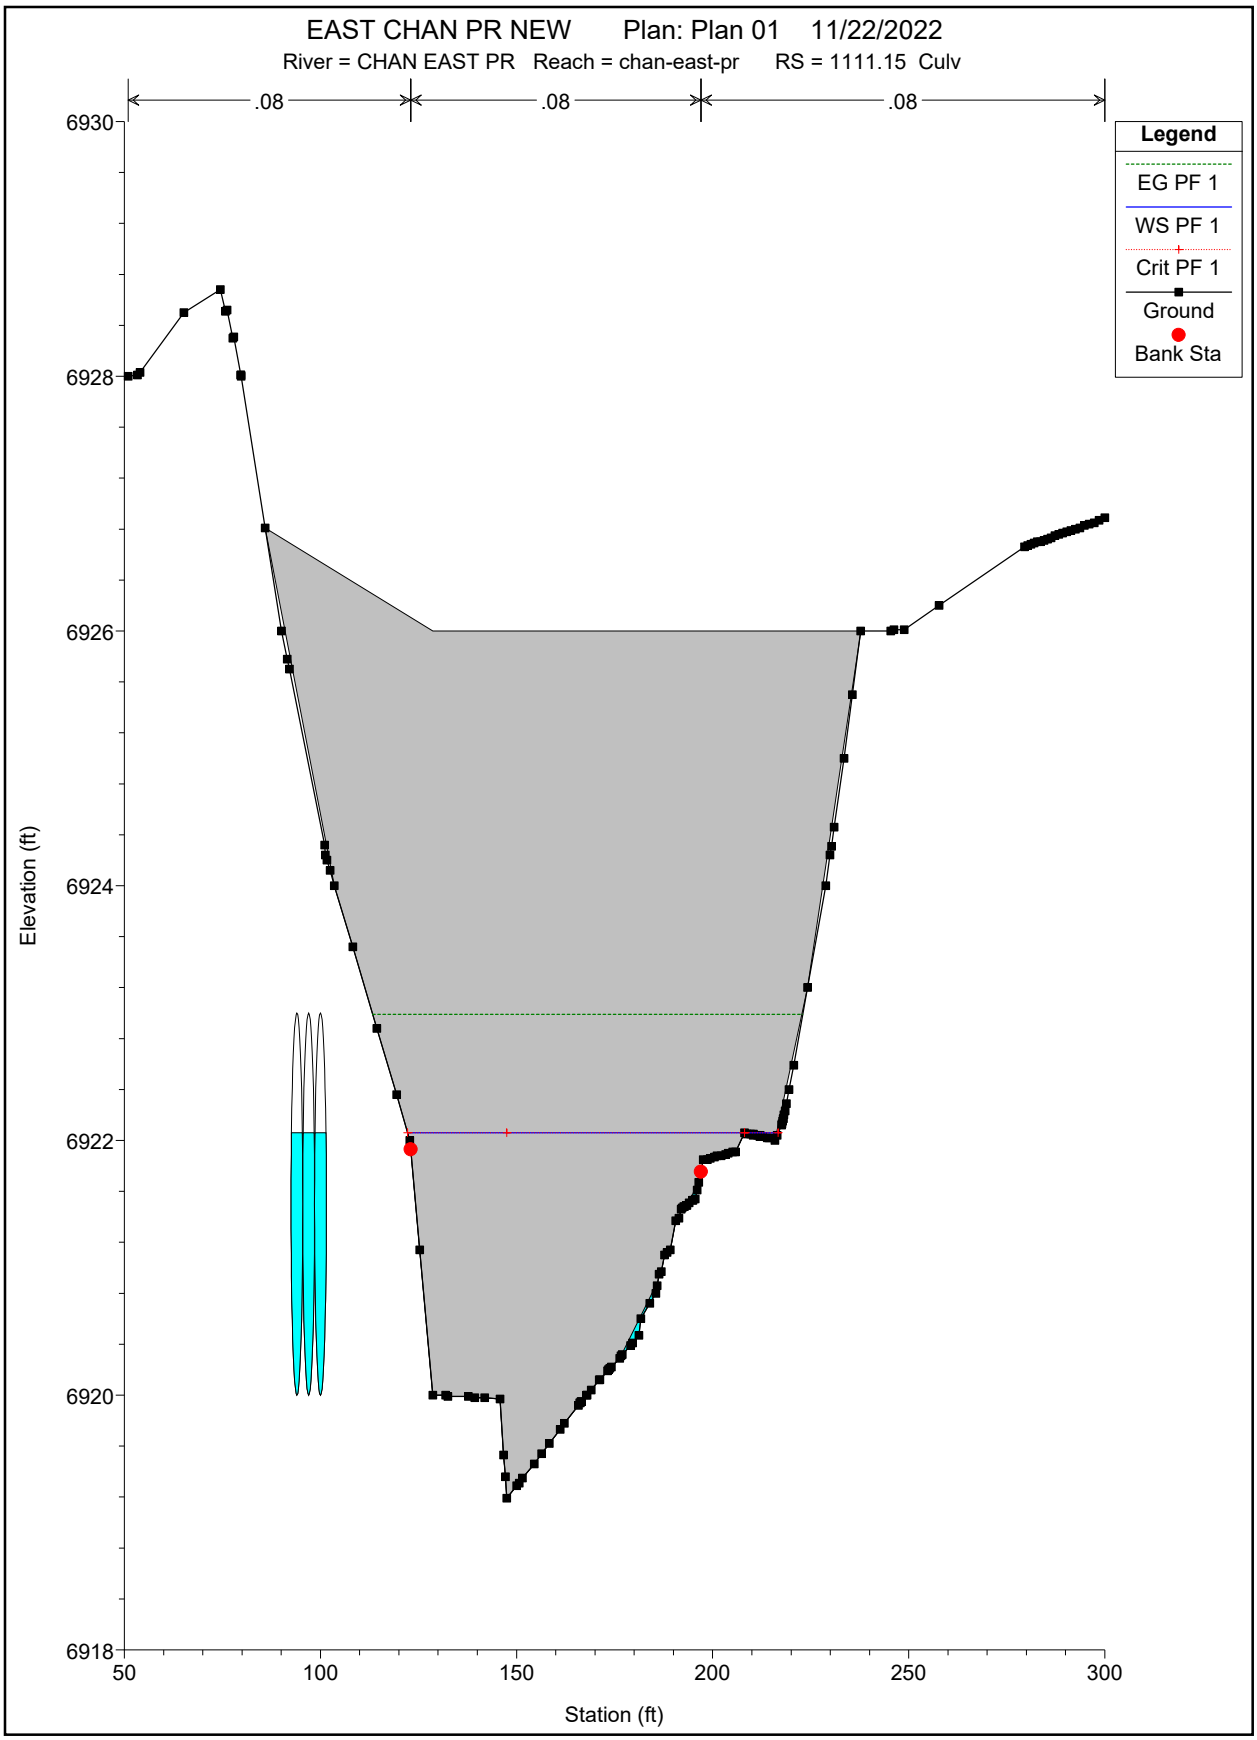
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1111.15 Culv
.08
.08
.08
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
6930
6928
6926
6924
6922
6920
6918
Elevation (ft)
50
100
150
200
250
300
Station (ft)

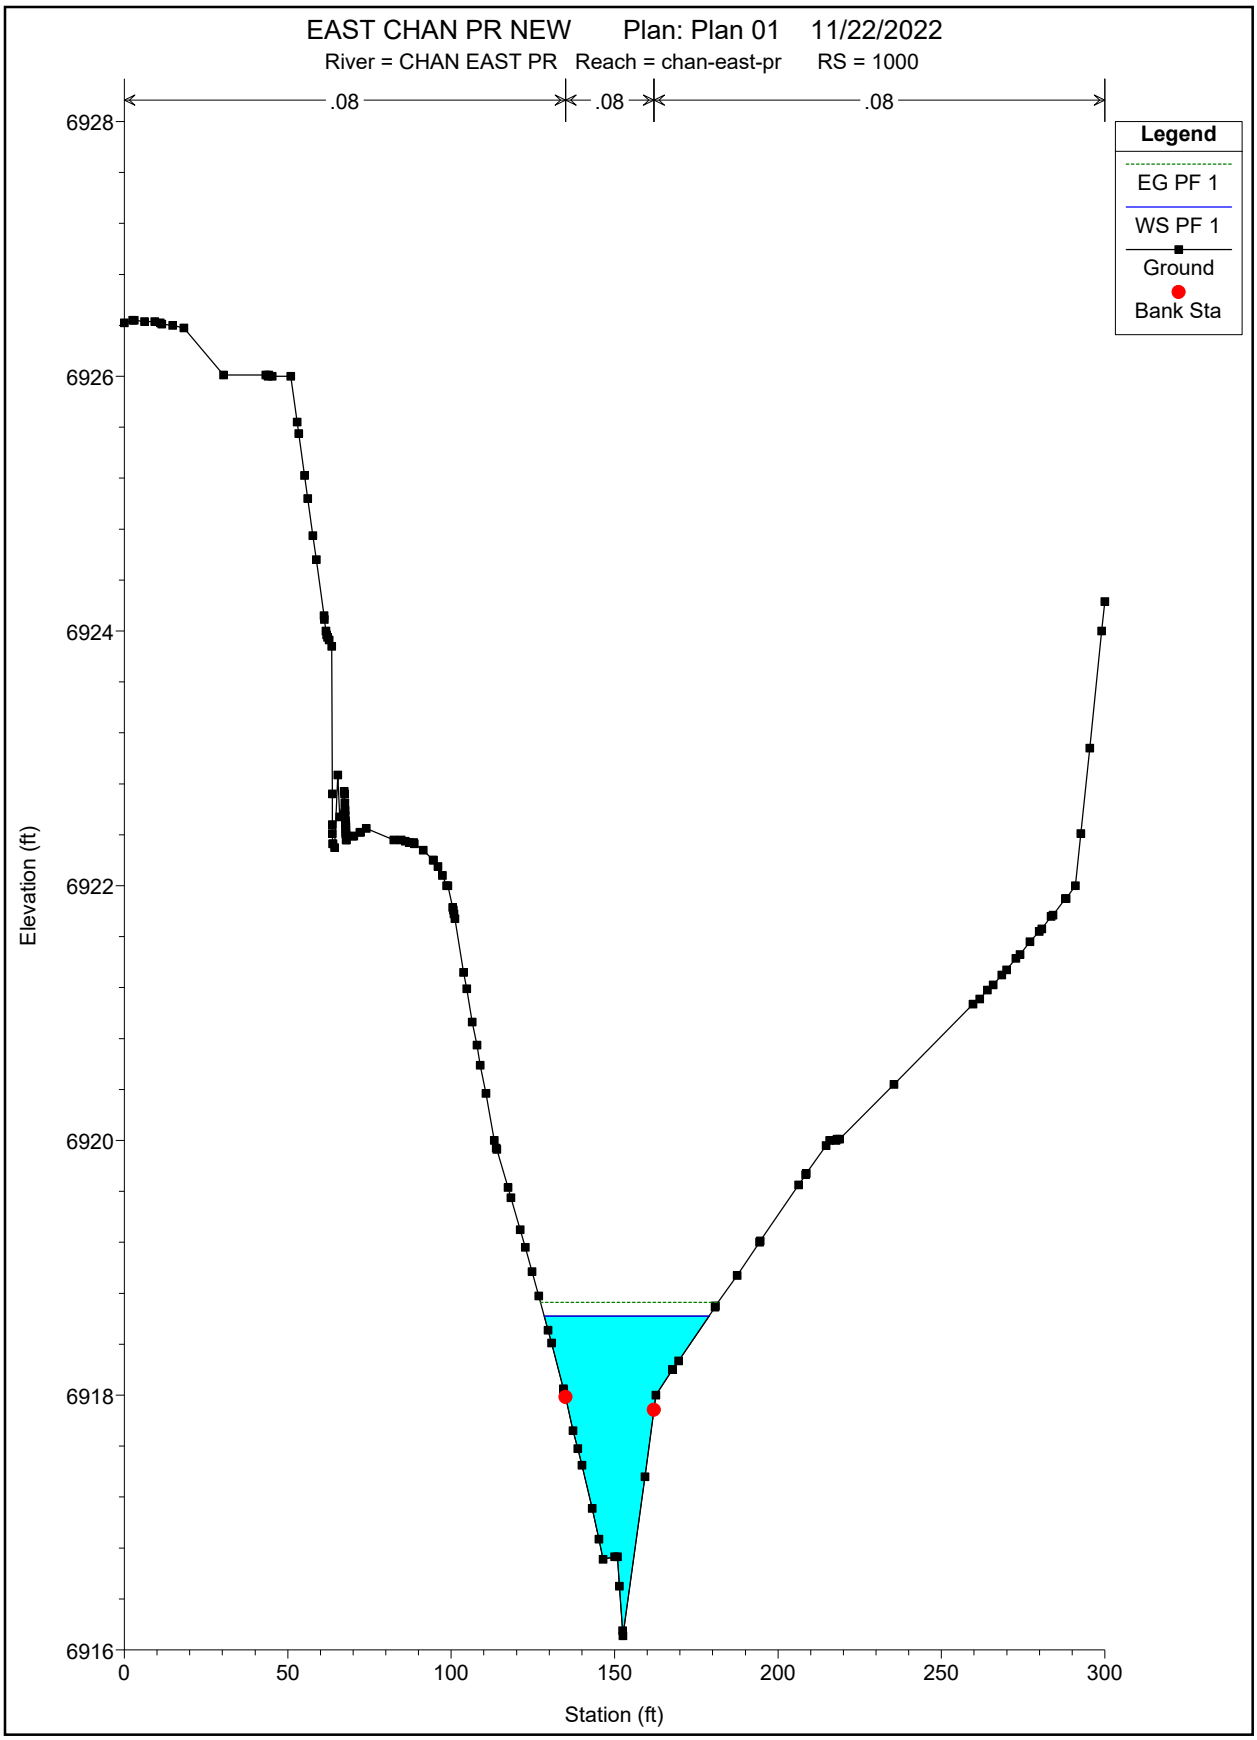
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 1000
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6928
6926
6924
6922
6920
6918
6916
0
50
100
150
200
250
300
Station (ft)

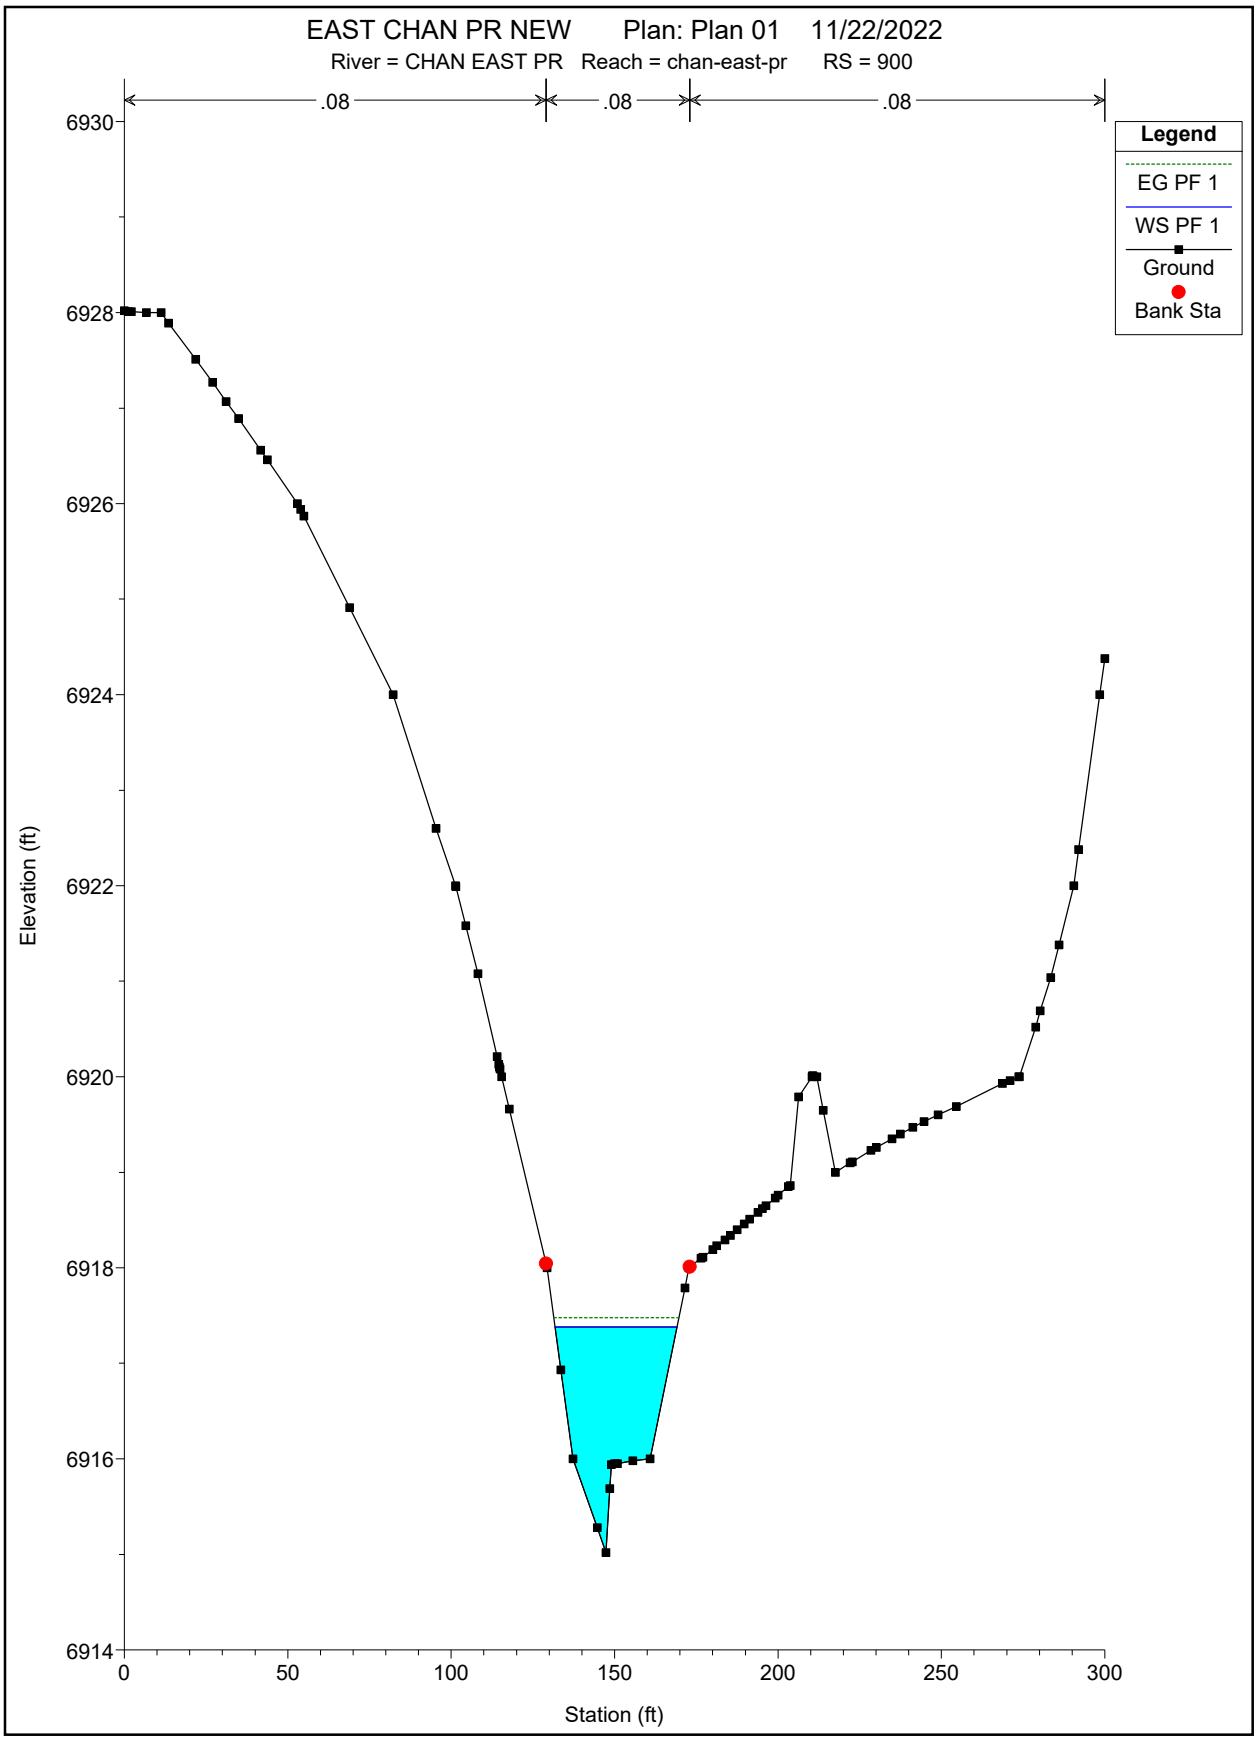
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 900
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6930
6928
6926
6924
6922
6920
6918
6916
6914
0
50
100
150
200
250
300
Station (ft)

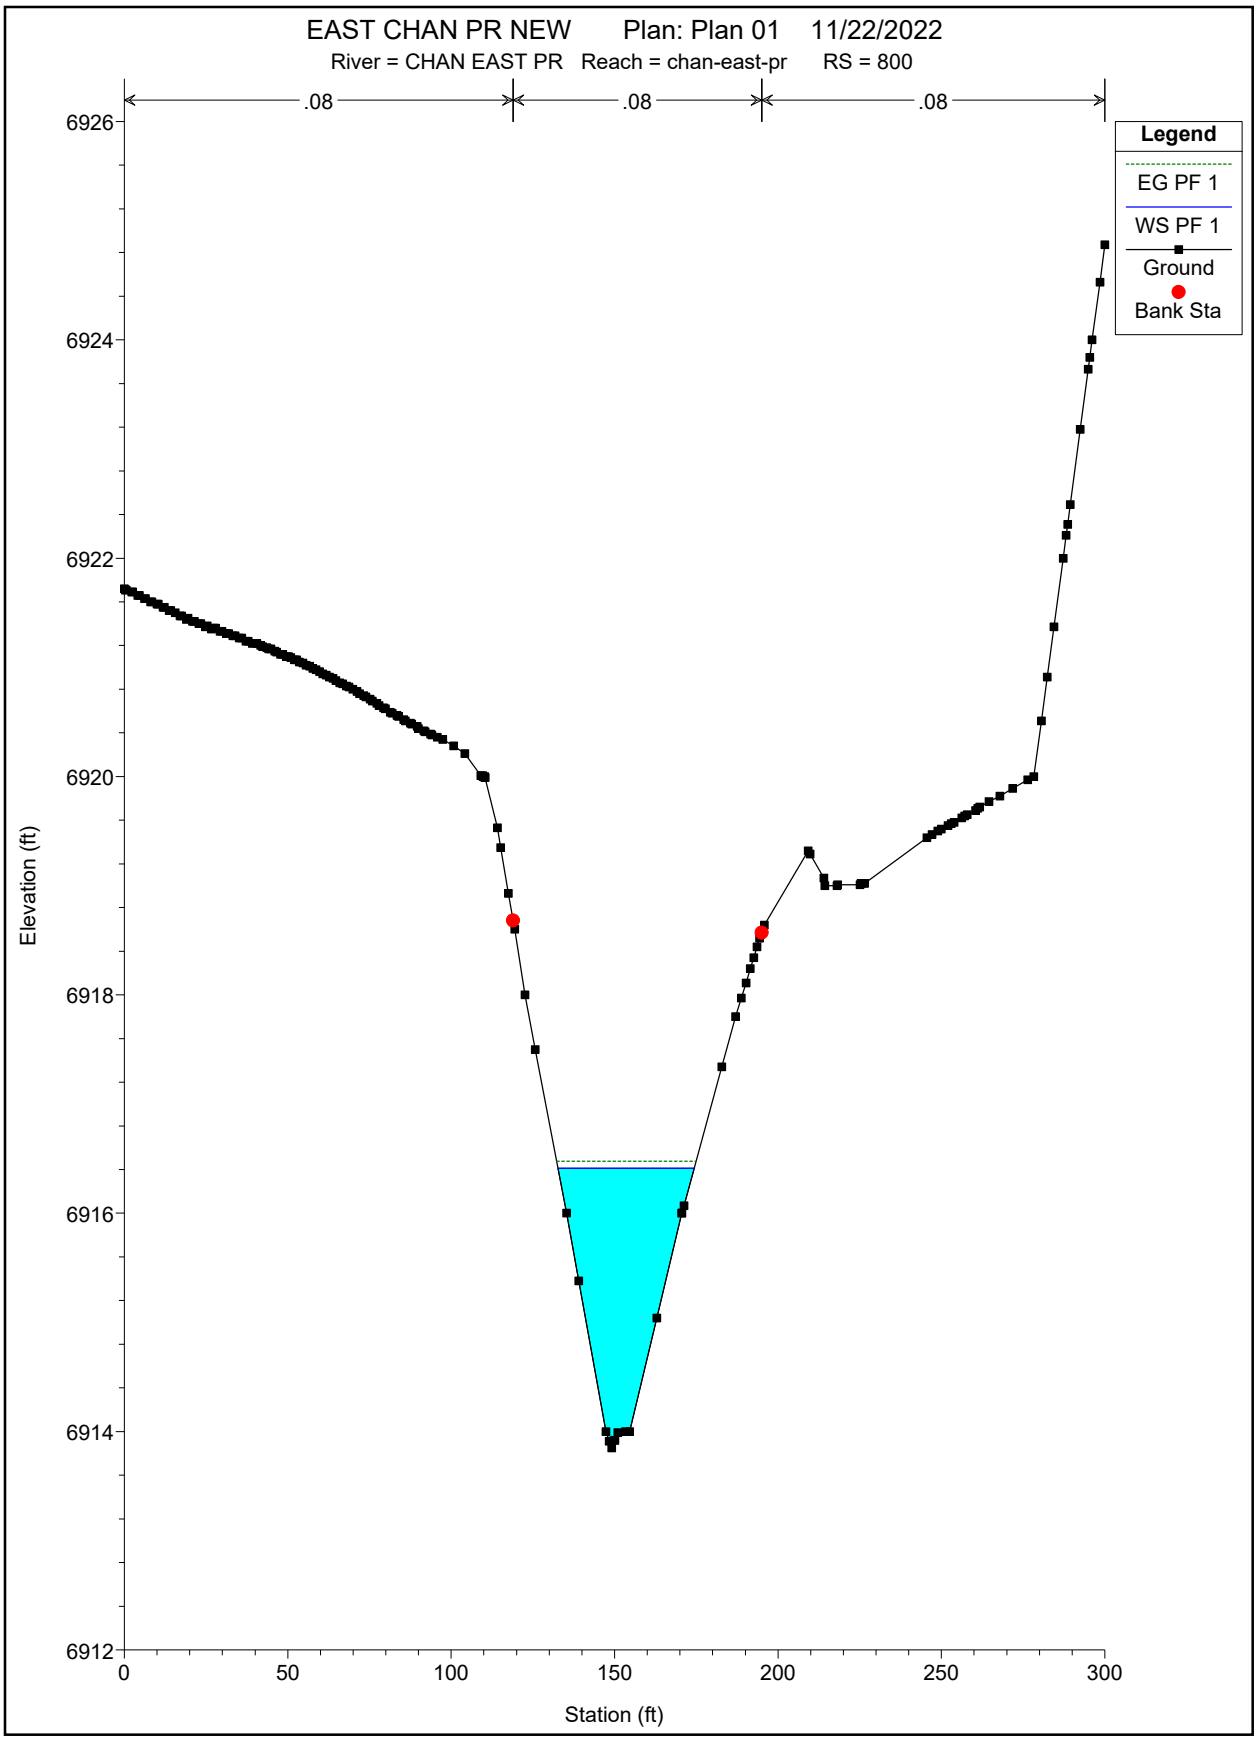
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 800
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
6926
6924
6922
6920
6918
6916
6914
6912
Elevation (ft)
0
50
100
150
200
250
300
Station (ft)

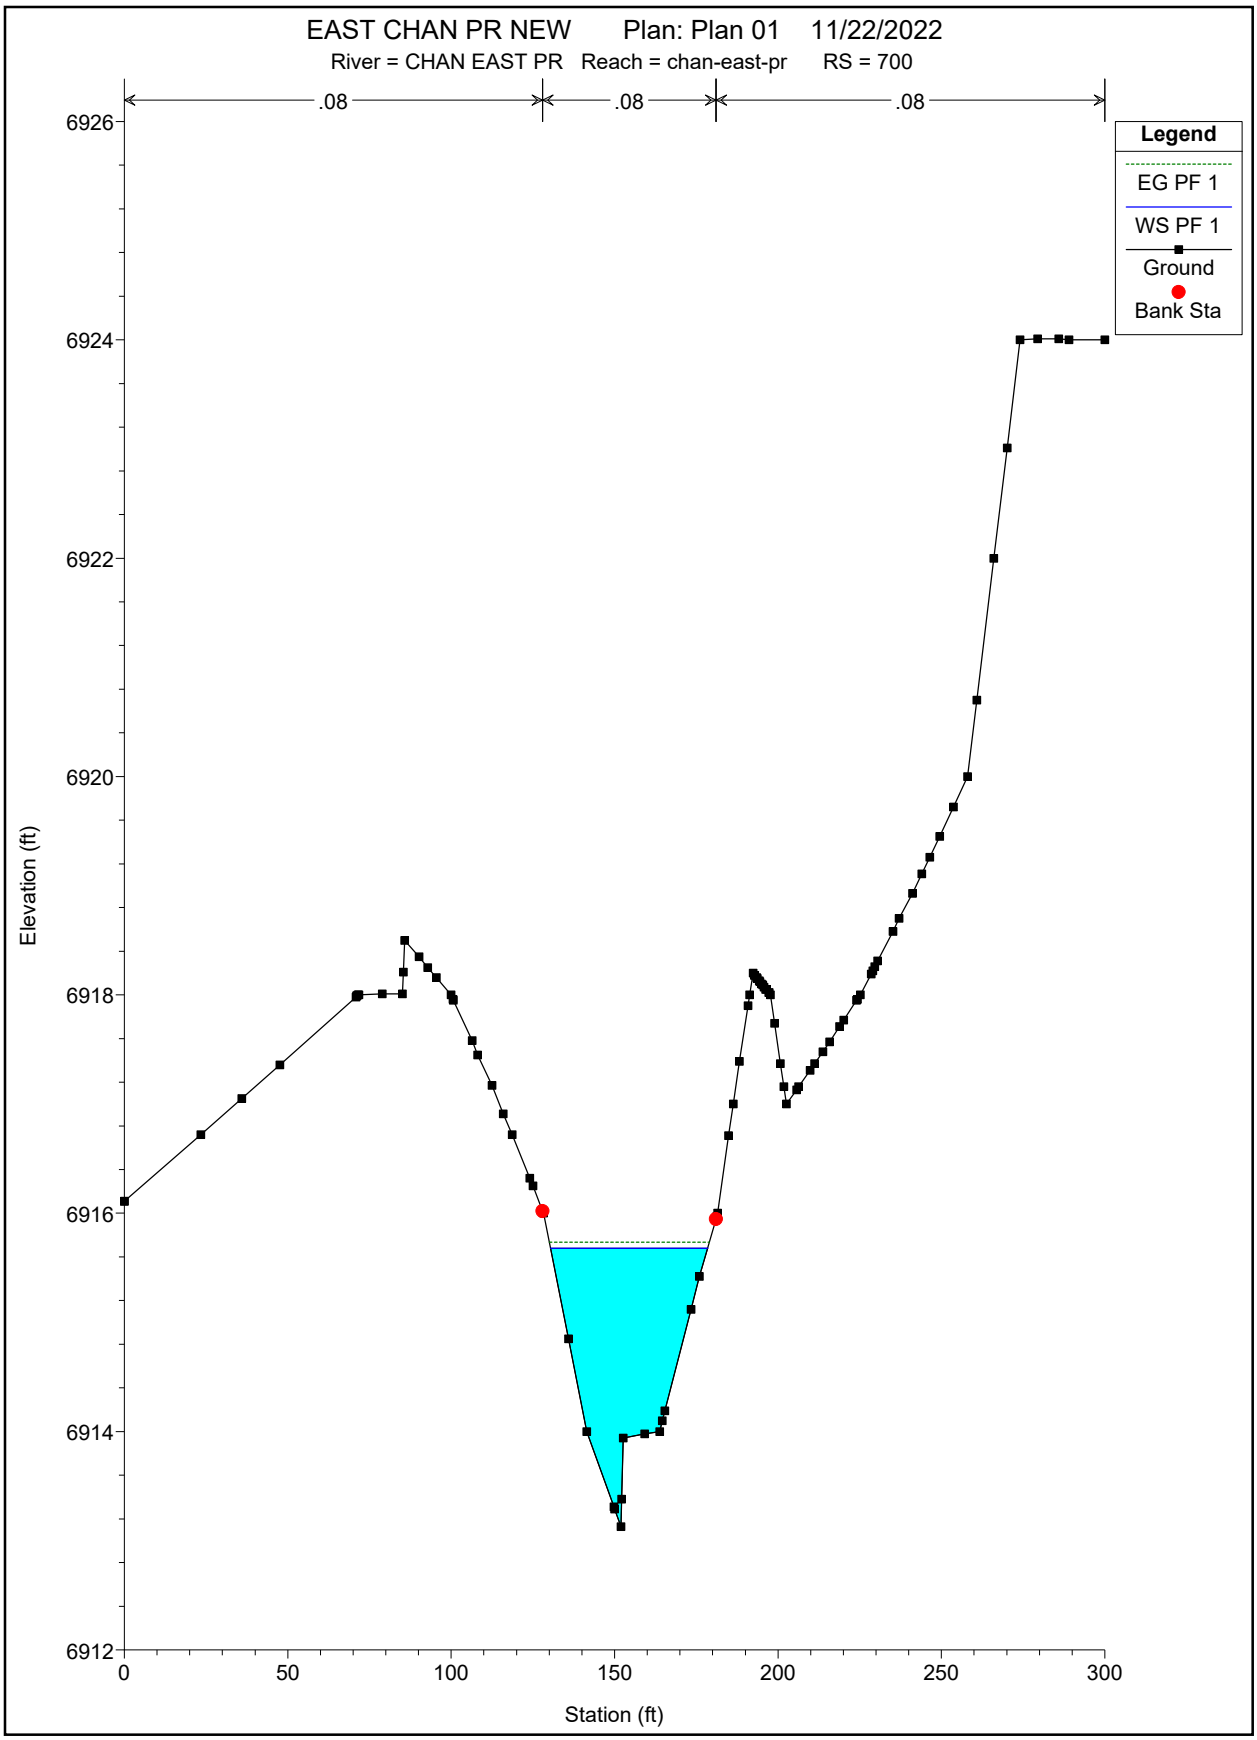
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 700
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
Station (ft)
6926
6924
6922
6920
6918
6916
6914
6912
0
50
100
150
200
250
300

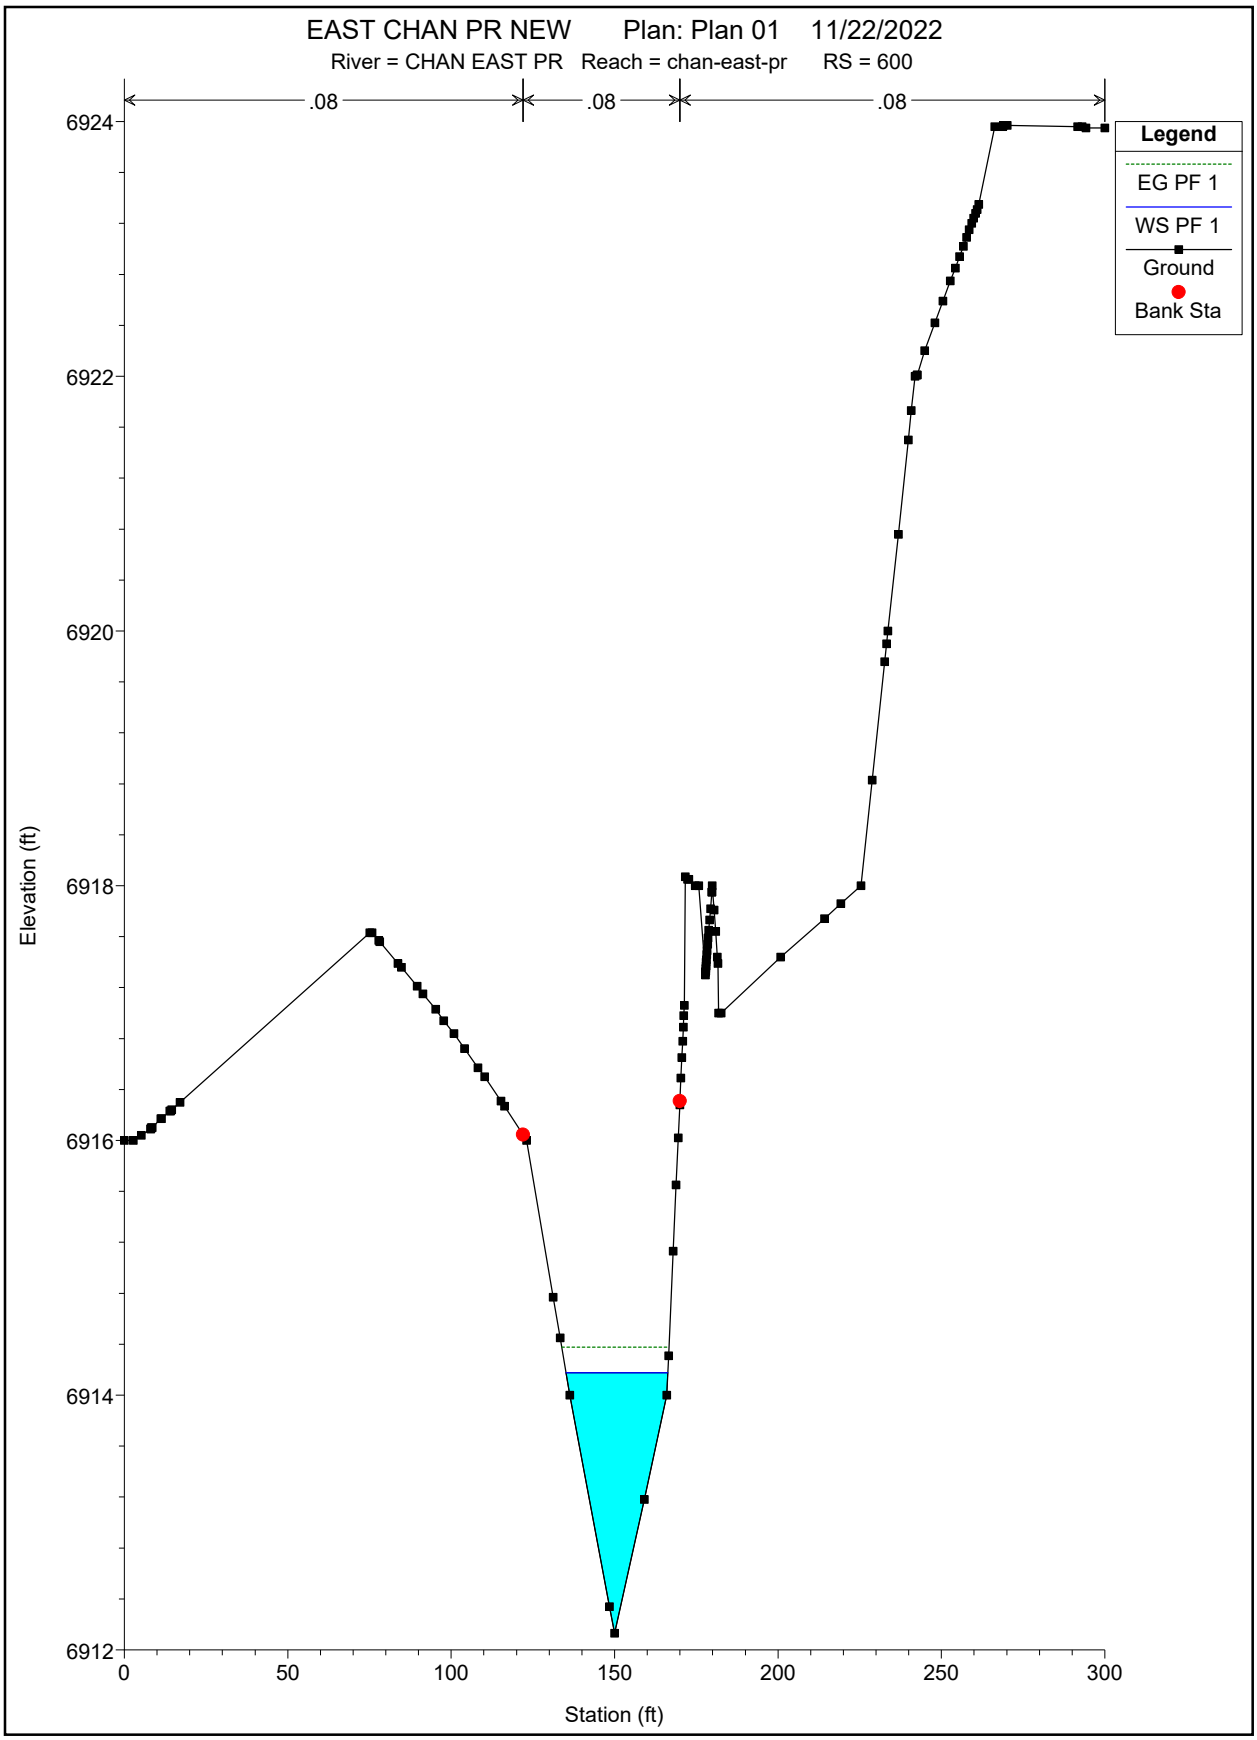
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 600
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
6924
6922
6920
6918
6916
6914
6912
0
50
100
150
200
250
300
Station (ft)

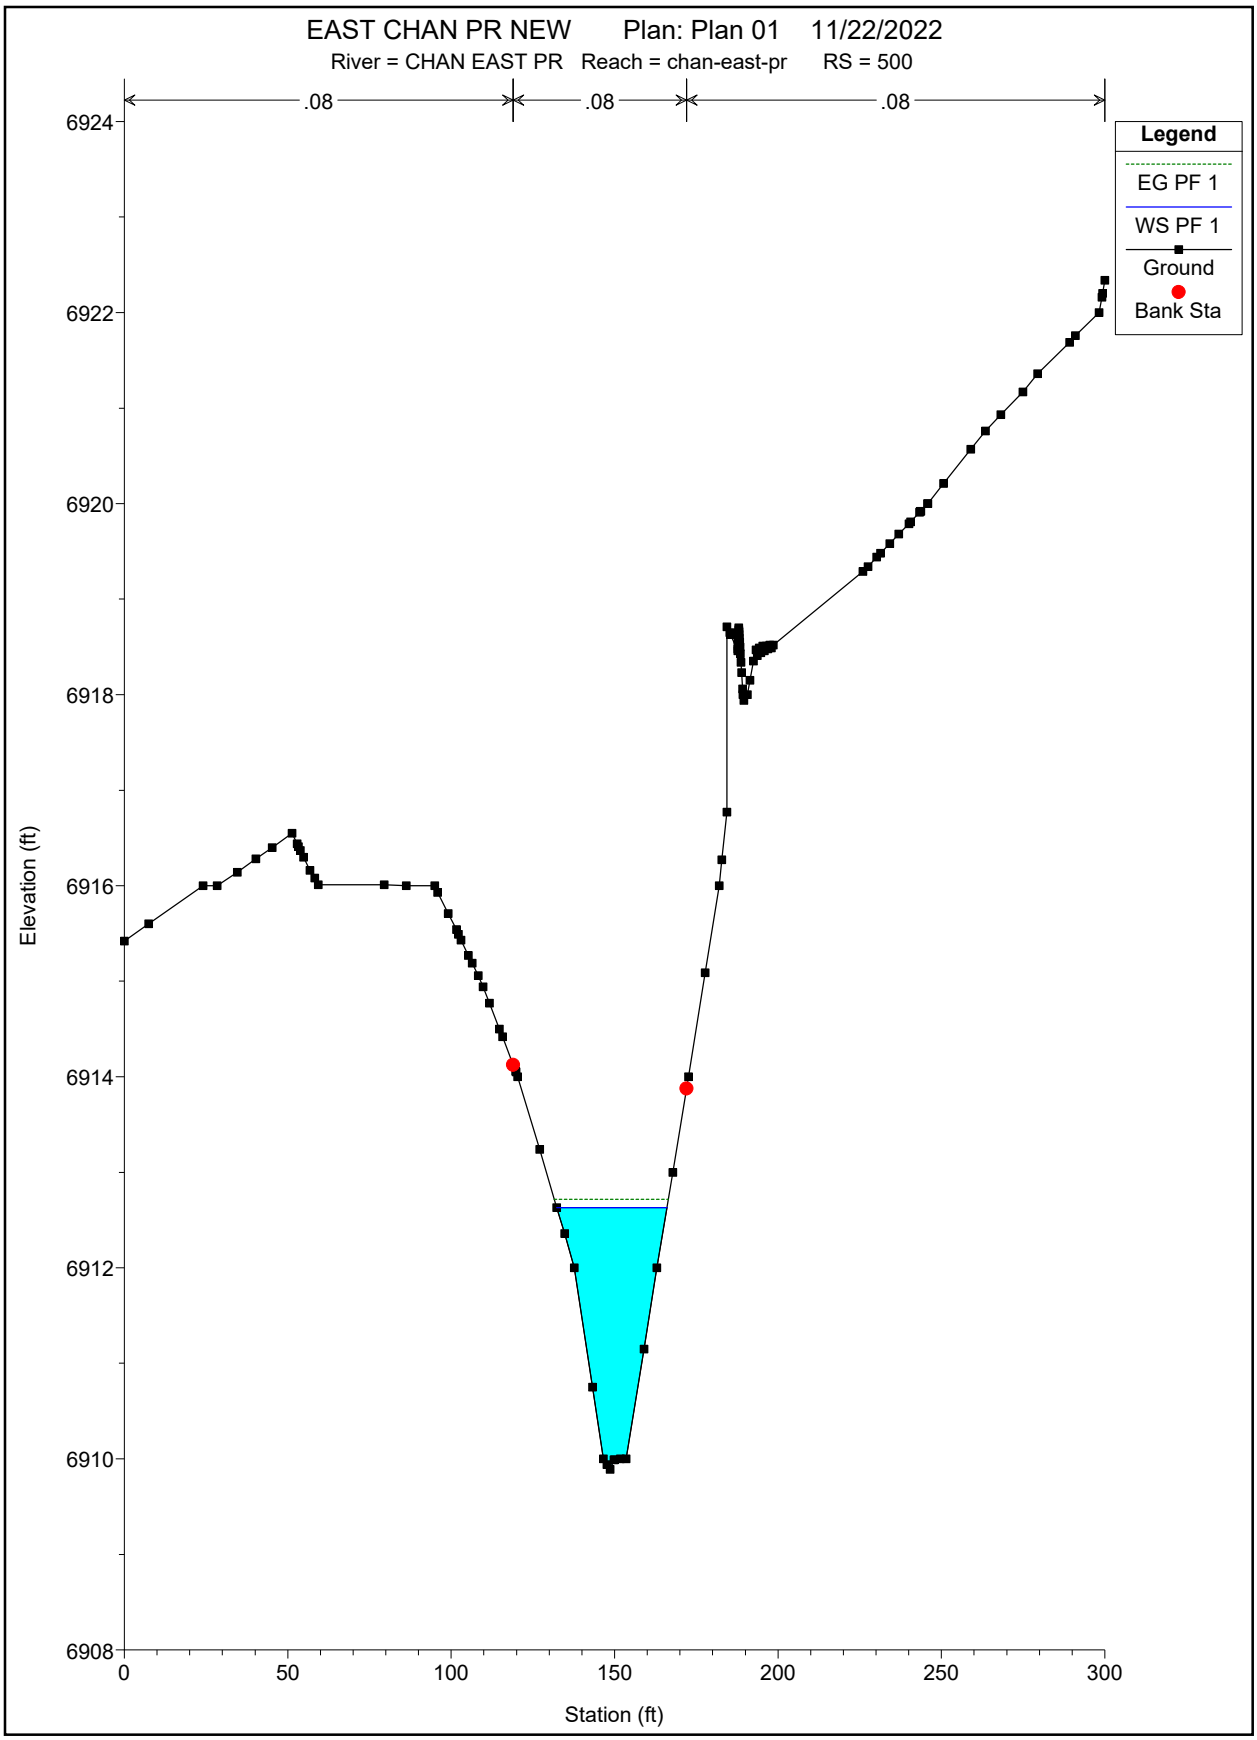
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 500
.08
.08
.08
Legend
EG PF 1
WS PF 1
Ground
Bank Sta
Elevation (ft)
Station (ft)
6924
6922
6920
6918
6916
6914
6912
6910
6908
0
50
100
150
200
250
300

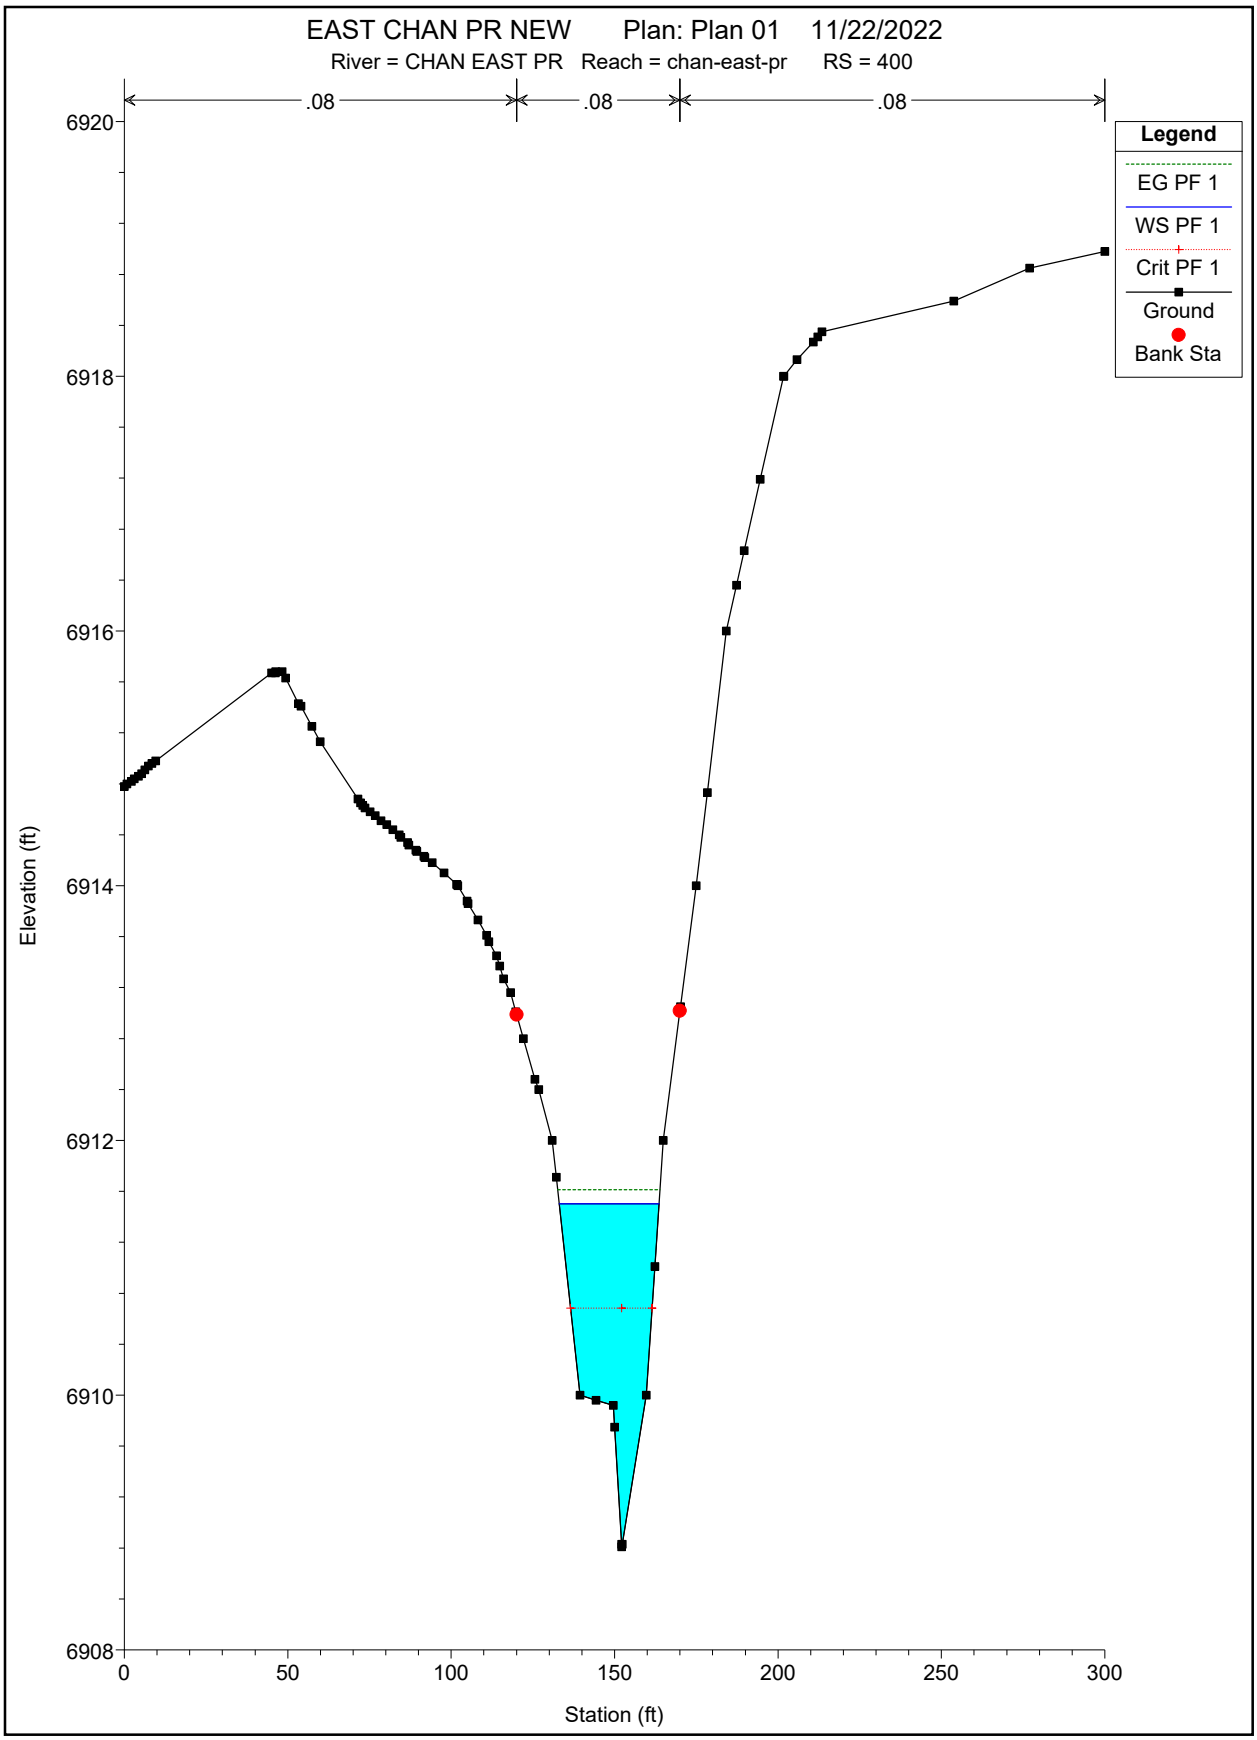
EAST CHAN PR NEW Plan: Plan 01 11/22/2022
River = CHAN EAST PR Reach = chan-east-pr RS = 400
.08
.08
.08
Legend
EG PF 1
WS PF 1
Crit PF 1
Ground
Bank Sta
Elevation (ft)
6920
6918
6916
6914
6912
6910
6908
0
50
100
150
200
250
300
Station (ft)

EASTONVILLE ROAD

LOT 42

LOT 41

4 WAY RANCH FIL NO 1

LOT 40

LOT 39

4 WAY RANCH FIL NO 1

LOT 38

LOT 37

LOT 36

LOT 35

4 WAY RANCH FIL NO 1

LOT 15

THATCHER COURT

GILBERT DRIVE

BANDANERO DRIVE

STAPLETON ROAD

WATERBURY FIL NO 1 & 2

4 WAY RANCH JOINT VENTURE, LLC.
P.O. Box 50223
Colorado Springs, CO 80949

4 WAY RANCH JOINT VENTURE, LLC.
P.O. Box 50223
Colorado Springs, CO 80949

4 WAY RANCH JOINT VENTURE, LLC.
P.O. Box 50223
Colorado Springs, CO 80949

4 WAY RANCH JOINT VENTURE, LLC.
P.O. Box 50223
Colorado Springs, CO 80949

4 WAY RANCH JOINT VENTURE, LLC.
P.O. Box 50223
Colorado Springs, CO 80949

KO1515 LLC
PO BOX 1385
COLORADO SPRINGS CO, 80901-1385

935 DEVELOPMENT INC.
P.O. BOX 50223
COLORADO SPRINGS, CO 80949

RS X-SECT 2600 100-Y W.S. EL=6961.79

RS X-SECT 2500 100-Y W.S. EL=6865.71

RS X-SECT 2400 100-Y W.S. EL = 6984.24

RS X-SECT 2300 100-Y W.S. EL = 6962.31

RS X-SECT 2200 100-Y W.S. EL = 6959.7

RS X-SECT 2100 100-Y W.S. EL = 6957.46

RS X-SECT 2000 100-Y W.S. EL = 6956.19

RS X-SECT 1900 100-Y W.S. EL = 6954.43

100-YEAR HWL HEC-RAS ANALYSIS

RS X-SECT 1800 100-Y W.S. EL = 6951.17

RS X-SECT 1700 100-Y W.S. EL = 6949.52

RS X-SECT 1600 100-Y W.S. EL = 6948.18

100-YEAR HWL HEC-RAS ANALYSIS

RS X-SECT 1500 100-Y W.S. EL = 6946.68

RS X-SECT 1400 100-Y W.S. EL = 6944.45

RS X-SECT 1300 100-Y W.S. EL = 6943.56

RS X-SECT 1200 100-Y W.S. EL = 6943.03

RS X-SECT 1100 100-Y W.S. EL = 6942.48

RS X-SECT 1000 100-Y W.S. EL = 6940.99

RS X-SECT 900 100-Y W.S. EL = 6938.39

RS X-SECT 800 100-Y W.S. EL = 6936.19

RS X-SECT 700 100-Y W.S. EL = 6934.17

RS X-SECT 600 100-Y W.S. EL = 6932.22

RS X-SECT 500 100-Y W.S. EL = 6929.7

100-YEAR HWL HEC-RAS ANALYSIS

RS X-SECT 400 100-Y W.S. EL = 6927.52

RS X-SECT 300 100-Y W.S. EL = 6924.34

RS X-SECT 200 100-Y W.S. EL = 6920.46

RS X-SECT 100 100-Y W.S. EL = 6920.09

RS X-SECT 0 100-Y W.S. EL = 6919.63

LEGEND
1' EXISTING CONTOUR
2' EXISTING CONTOUR
EXISTING 100-Y HIGH WATER LINE
CHANNEL ALIGNMENT
SUBDIVISION BOUNDARY
EXISTING ADJACENT LOTS/ROW
WETLANDS

N

120' 0 120' 240'

SCALE: 1"=120'

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING, INC. APPROVES THEIR USE ONLY FOR THE PURPOSES DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURE
ATTN: PETER MARTZ
P.O. BOX 50223
COLORADO SPRINGS, CO 80949
719-491-3150

Terra Nova Engineering, Inc.
Creative Civil Engineering Solutions
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnesinc.com

WATERBURY FILING NO. 1 & 2

EXISTING 100-Y FLOODPLAIN EXHIBIT
WEST CHANNEL ONLY

DESIGNED BY DLF
DRAWN BY QNA
CHECKED BY QNA
H-SCALE 1" = 120'
V-SCALE N/A
JOB NO. 1715.00
DATE ISSUED 11/22/22
SHEET NO. 1 OF 2

WATERBURY FIL NO 1 & 2
TRACT E

EASTONVILLE ROAD

4 WAY RANCH JOINT VENTURE, LLC.
P.O. Box 50223
Colorado Springs, CO 80949

4 WAY RANCH FIL NO 1

LOT 42
LOT 41
LOT 40
LOT 39
LOT 38
LOT 37
LOT 36
LOT 35
LOT 15

MUDDY POND STREET
50' R.O.W.
URBAN RESIDENTIAL LOCAL

FISH CAMP DRIVE
50' R.O.W.
URBAN RESIDENTIAL LOCAL

THATCHER COURT
50' R.O.W.
URBAN RESIDENTIAL LOCAL

GILBERT DRIVE
70' R.O.W.
URBAN RES. LOCAL

SUMMIT MEADOW ROAD
50' R.O.W.
URBAN RESIDENTIAL COLLECTOR

SAWBROOK ROAD
50' R.O.W.
URBAN RESIDENTIAL COLLECTOR

SANDY NECK WAY
50' R.O.W.
URBAN RESIDENTIAL LOCAL

SWANSWICK ROAD
50' R.O.W.
URBAN RESIDENTIAL LOCAL

BEECH CREEK DRIVE
50' R.O.W.
URBAN RESIDENTIAL LOCAL

STAPLETON ROAD

STAPLETON DRIVE (130' R.O.W.) PRINCIPAL ARTERIAL

BANDANERO DRIVE

TRACT A
TRACT B
TRACT C
TRACT D
TRACT F
TRACT G
TRACT H
TRACT J
TRACT Y

100-YEAR HWL
HEC-RAS ANALYSIS

STA 1850 TO STA 1950
100 LF OF SELECTIVE
RIPRAP BANK STABILIZATION

STA 1350 TO STA 1450
100 LF OF SELECTIVE
RIPRAP BANK STABILIZATION

STA 250 TO STA 350
100 LF OF SELECTIVE
RIPRAP BANK STABILIZATION

STA 14450.00 PROP.
SHEET PILE CHECK
STRUCTURE W/
CONCRETE CAP.
TOP=6944.00
BOT=6941.00

104.42.50 CUL U
100-Y W.S. EL = 6939.32
100-Y W.S. EL = 6939.29

935 DEVELOPMENT INC.
P.O. BOX 50223
COLORADO SPRINGS, CO 80949

KO1515 LLC
PO BOX 1385
COLORADO SPRINGS CO, 80901-1385

LEGEND
10' EXISTING CONTOUR
5' EXISTING CONTOUR
10' PROPOSED CONTOUR
5' PROPOSED CONTOUR
LIMITS OF DISTURBANCE
SUBDIVISION BOUNDARY
100-Y HIGH WATER LINE
CHANNEL ALIGNMENT
MINIMUM FINISHED FLOOR
M.S.
WETLANDS
WATER SURFACE

N

120' 0 120' 240'
SCALE: 1"=120'

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING, INC. APPROVES THEIR USE ONLY FOR THE PURPOSES DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURE
ATTN: PETER MARTZ
P.O. BOX 50223
COLORADO SPRINGS, CO 80949
719-491-3150

Terra Nova Engineering, Inc.
Creative Civil Engineering Solutions Since 1987
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnesinc.com

WATERBURY FILING NO. 1 & 2

PROPOSED 100-Y FLOODPLAIN EXHIBIT

DESIGNED BY DLF
DRAWN BY QNA
CHECKED BY QNA
H-SCALE 1" = 100'
V-SCALE N/A
JOB NO. 1715.00
DATE ISSUED 11/22/22
SHEET NO. 2 OF 2

DRAINAGE MAPS

MDDP DRAINAGE REPORT ~ EXISTING BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		WEIGHTED CA	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	CA(5)	CA(100)
EXA	9.62	0.00	0.45	0.59	9.62	0.09	0.36	0.09	0.36	**0.87**	**3.46**
EXB	4.09	0.00	0.45	0.59	4.09	0.09	0.36	0.09	0.36	**0.37**	**1.47**
EXC	24.80	0.00	0.45	0.59	24.80	0.09	0.36	0.09	0.36	**2.23**	**8.93**
EXD	15.87	0.00	0.45	0.59	15.87	0.09	0.36	0.09	0.36	**1.43**	**5.71**
EXE	5.83	0.00	0.45	0.59	5.83	0.09	0.36	0.09	0.36	**0.52**	**2.10**
EXF	1.62	0.00	0.45	0.59	1.62	0.09	0.36	0.09	0.36	**0.15**	**0.58**
OS-1	45.02	0.00	0.45	0.59	45.02	0.09	0.36	0.09	0.36	**4.05**	**16.21**
OS-2	11.40	0.00	0.45	0.59	11.40	0.09	0.36	0.09	0.36	**1.03**	**4.11**
OS-3	1.11	0.00	0.45	0.59	1.11	0.09	0.36	0.09	0.36	**0.10**	**0.40**
OS-4	0.29	0.00	0.45	0.59	0.29	0.09	0.36	0.09	0.36	**0.03**	**0.11**
OS-5	6.74	0.00	0.45	0.59	6.74	0.09	0.36	0.09	0.36	**0.61**	**2.43**
OS-8	2.56	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-9	11.80	FLOW TAKEN FROM MERIDAIN RANCH MDDP									
OS-10A	12.80	FLOW TAKEN FROM MERIDAIN RANCH MDDP									

MDDP ~ EXISTING BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
EXA	0.87	3.46	0.25	100	3	11.1	1193	1.7%	4.5	4.4	15.4	3.43	5.81	**3**	**20**
EXB	0.37	1.47	0.25	100	2	12.6	623	2.2%	5.2	2.0	14.6	3.51	5.96	**1**	**9**
EXC	2.23	8.93	0.25	100	2.5	11.7	2420	1.7%	4.6	8.9	20.6	3.01	5.01	**7**	**45**
EXD	1.43	5.71	0.25	100	2	12.6	1615	2.6%	5.6	4.8	17.4	3.25	5.47	**5**	**31**
EXE	0.52	2.10	0.25	100	8	8.0	1063	2.1%	5.0	3.5	11.5	3.86	6.66	**2**	**14**
EXF	0.15	0.58	0.25	100	6	8.8	400	2.5%	5.5	1.2	10.0	4.06	7.07	**1**	**4**
OS-1	4.05	16.21	0.25	100	6	8.8	3219	2.3%	5.3	10.1	18.9	3.13	5.24	**13**	**85**
OS-2	1.03	4.11	0.25	100	2	12.6	1203	1.0%	3.5	5.7	18.4	3.17	5.32	**3**	**22**
OS-3	0.10	0.40	0.25	100	2	12.6	330	2.6%	5.6	1.0	13.6	3.61	6.17	**0**	**2**
OS-4	0.03	0.11	0.25	100	2	12.6	230	2.6%	5.7	0.7	13.3	3.64	6.23	**0**	**1**
OS-5	0.61	2.43	0.25	80	5	7.8	1000	2.5%	5.5	3.0	10.8	3.96	6.85	**2**	**17**
OS-8	FLOW TAKEN FROM MERIDAIN RANCH MDDP													**5**	**11**
OS-9	FLOW TAKEN FROM MERIDAIN RANCH MDDP													**8**	**19**

MDDP ~ EXISTING SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity I(5)	Intensity I(100)	Flow Q(5)	Flow Q(100)	Facility Size
EX1	EXA, OS-5, & DP-EX10A	18.92	1.47	5.89	15.4	3.43	5.81	33	219	3-42" CULVERTS
EX2	EXB	4.09	0.37	1.47	14.6	3.51	5.96	1	9	STAPLETON ROAD
EX3	EXC & OS-4	25.10	2.26	9.03	20.6	3.01	5.01	7	45	EAST BOUNDARY
EX4	EXD & OS-3	16.98	1.53	6.11	17.4	3.25	5.47	5	33	EAST BOUNDARY
EX5	EXE, OS-2 & OS-8	17.23	1.55	6.20	18.4	3.17	5.32	10	44	EAST BOUNDARY
EX6	EXF	1.62	0.15	0.58	13.8	3.59	6.12	1	4	EAST BOUNDARY
EX7A	OS-1 & OS-9	56.82	4.05	16.21	18.9	3.13	5.24	21	104	POINT ALONG CHANNEL
EX7	EXE, EXF, OS-1, OS-2, OS-8 & OS-9	78.24	5.75	23.00	18.9	3.13	5.24	31	151	DP 30 PROP CONDITION
EX9	OS-9	11.80						8	19	EX 36" RCP Culvert
EX10	OS-8	2.56						5	11	EX 36" RCP Culvert
EX10A	MERIDIAN POND E RELEASE	Meridaian Ranch Filing 3 FDR Calculated Flows						28	185	EX 3-42" RCP Culverts
13	TOTAL OFFISITE EX. STOCK POND INFLOW	Per "Final Drainage Report for Waterbury Filing No. 1" dated September 2016, by Classic Consulting						69	396	EX STOCK POND

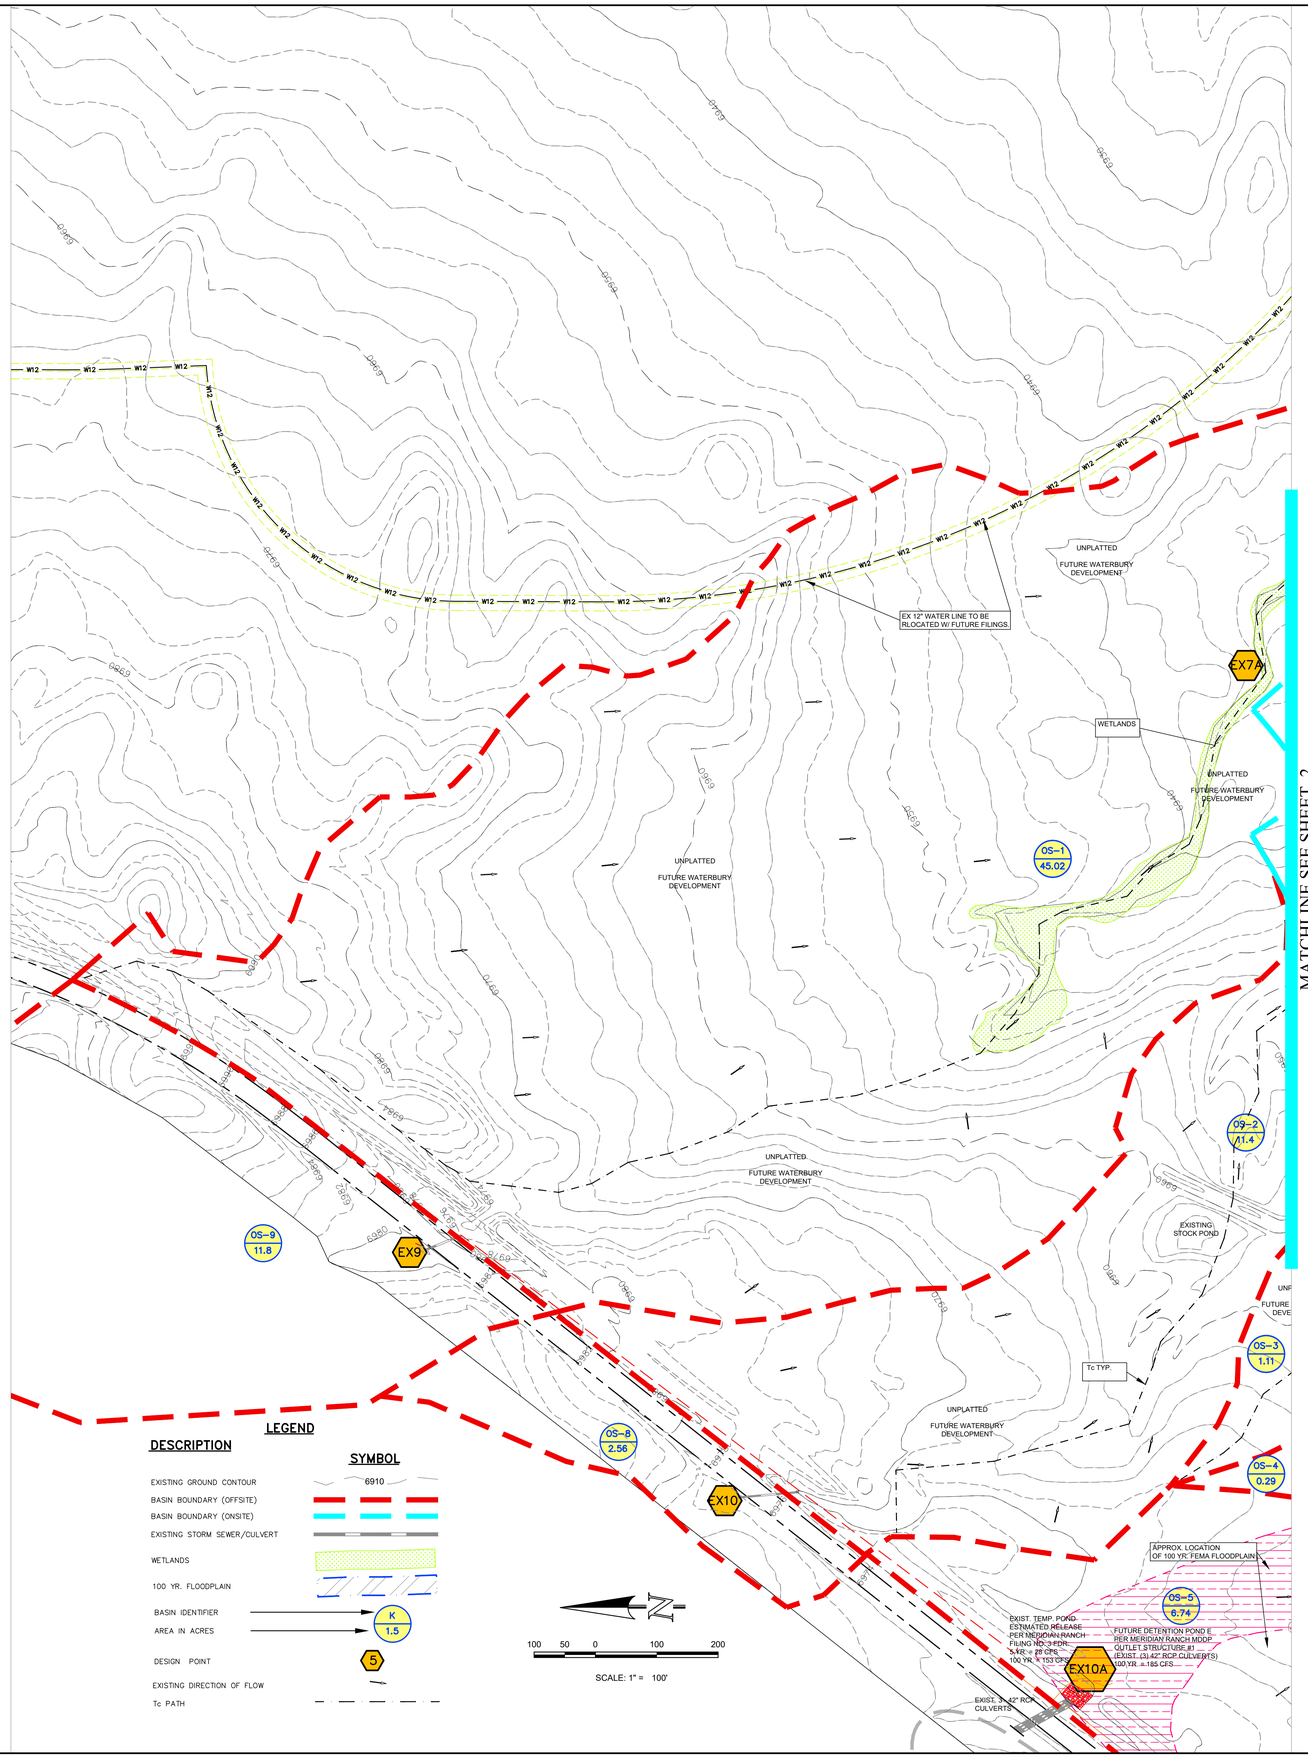
W12
EX 12" WATER LINE TO BE RELOCATED W/ FUTURE FILINGS.
UNPLATTED FUTURE WATERBURY DEVELOPMENT
EX7A
WETLANDS
OS-1 45.02
OS-2 11.4
OS-9 11.8
EX9
OS-8 2.56
EX10
OS-3 1.11
OS-4 0.29
OS-5 6.74
EX10A
EXISTING STOCK POND
Tc TYP.
APPROX. LOCATION OF 100 YR. FEMA FLOODPLAIN
EXIST. TEMP. POND ESTIMATED RELEASE PER MERIDIAN RANCH FILING NO. 3 FDR: 5 YR. = 28 CFS 100 YR. = 153 CFS
FUTURE DETENTION POND E PER MERIDIAN RANCH MDDP OUTLET STRUCTURE #1 (EXIST. (3) 42" RCP CULVERTS) 100 YR. =185 CFS
EXIST. 3 - 42" RCP CULVERTS
MATCHLINE SEE SHEET 2
6910
6900
6890
6880
6870
6860
6850
6840
6830
6820
6810
6800
6790
6780
6770
6760
6750
6740
6730
6720
6710
6700
6690
6680
6670
6660
6650
6640
6630
6620
6610
6600
6590
6580
6570
6560
6550
6540
6530
6520
6510
6500
6490
6480
6470
6460
6450
6440
6430
6420
6410
6400
6390
6380
6370
6360
6350
6340
6330
6320
6310
6300
6290
6280
6270
6260
6250
6240
6230
6220
6210
6200
6190
6180
6170
6160
6150
6140
6130
6120
6110
6100
6090
6080
6070
6060
6050
6040
6030
6020
6010
6000
5990
5980
5970
5960
5950
5940
5930
5920
5910
5900
5890
5880
5870
5860
5850
5840
5830
5820
5810
5800
5790
5780
5770
5760
5750
5740
5730
5720
5710
5700
5690
5680
5670
5660
5650
5640
5630
5620
5610
5600
5590
5580
5570
5560
5550
5540
5530
5520
5510
5500
5490
5480
5470
5460
5450
5440
5430
5420
5410
5400
5390
5380
5370
5360
5350
5340
5330
5320
5310
5300
5290
5280
5270
5260
5250
5240
5230
5220
5210
5200
5190
5180
5170
5160
5150
5140
5130
5120
5110
5100
5090
5080
5070
5060
5050
5040
5030
5020
5010
5000
4990
4980
4970
4960
4950
4940
4930
4920
4910
4900
4890
4880
4870
4860
4850
4840
4830
4820
4810
4800
4790
4780
4770
4760
4750
4740
4730
4720
4710
4700
4690
4680
4670
4660
4650
4640
4630
4620
4610
4600
4590
4580
4570
4560
4550
4540
4530
4520
4510
4500
4490
4480
4470
4460
4450
4440
4430
4420
4410
4400
4390
4380
4370
4360
4350
4340
4330
4320
4310
4300
4290
4280
4270
4260
4250
4240
4230
4220
4210
4200
4190
4180
4170
4160
4150
4140
4130
4120
4110
4100
4090
4080
4070
4060
4050
4040
4030
4020
4010
4000
3990
3980
3970
3960
3950
3940
3930
3920
3910
3900
3890
3880
3870
3860
3850
3840
3830
3820
3810
3800
3790
3780
3770
3760
3750
3740
3730
3720
3710
3700
3690
3680
3670
3660
3650
3640
3630
3620
3610
3600
3590
3580
3570
3560
3550
3540
3530
3520
3510
3500
3490
3480
3470
3460
3450
3440
3430
3420
3410
3400
3390
3380
3370
3360
3350
3340
3330
3320
3310
3300
3290
3280
3270
3260
3250
3240
3230
3220
3210
3200
3190
3180
3170
3160
3150
3140
3130
3120
3110
3100
3090
3080
3070
3060
3050
3040
3030
3020
3010
3000
2990
2980
2970
2960
2950
2940
2930
2920
2910
2900
2890
2880
2870
2860
2850
2840
2830
2820
2810
2800
2790
2780
2770
2760
2750
2740
2730
2720
2710
2700
2690
2680
2670
2660
2650
2640
2630
2620
2610
2600
2590
2580
2570
2560
2550
2540
2530
2520
2510
2500
2490
2480
2470
2460
2450
2440
2430
2420
2410
2400
2390
2380
2370
2360
2350
2340
2330
2320
2310
2300
2290
2280
2270
2260
2250
2240
2230
2220
2210
2200
2190
2180
2170
2160
2150
2140
2130
2120
2110
2100
2090
2080
2070
2060
2050
2040
2030
2020
2010
2000
1990
1980
1970
1960
1950
1940
1930
1920
1910
1900
1890
1880
1870
1860
1850
1840
1830
1820
1810
1800
1790
1780
1770
1760
1750
1740
1730
1720
1710
1700
1690
1680
1670
1660
1650
1640
1630
1620
1610
1600
1590
1580
1570
1560
1550
1540
1530
1520
1510
1500
1490
1480
1470
1460
1450
1440
1430
1420
1410
1400
1390
1380
1370
1360
1350
1340
1330
1320
1310
1300
1290
1280
1270
1260
1250
1240
1230
1220
1210
1200
1190
1180
1170
1160
1150
1140
1130
1120
1110
1100
1090
1080
1070
1060
1050
1040
1030
1020
1010
1000
990
980
970
960
950
940
930
920
910
900
890
880
870
860
850
840
830
820
810
800
790
780
770
760
750
740
730
720
710
700
690
680
670
660
650
640
630
620
610
600
590
580
570
560
550
540
530
520
510
500
490
480
470
460
450
440
430
420
410
400
390
380
370
360
350
340
330
320
310
300
290
280
270
260
250
240
230
220
210
200
190
180
170
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0
-10
-20
-30
-40
-50
-60
-70
-80
-90
-100
-110
-120
-130
-140
-150
-160
-170
-180
-190
-200
-210
-220
-230
-240
-250
-260
-270
-280
-290
-300
-310
-320
-330
-340
-350
-360
-370
-380
-390
-400

MATCHLINE SEE SHEET 1

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (TRIB. TO POND)	
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
EX STORM SEWER/CULVERT	
WETLANDS	
100 YR. FLOODPLAIN	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
EXISTING DIRECTION OF FLOW	
Tc PATH	

100 50 0 100 200

SCALE: 1" = 100'

EX1 EX2 EX3 EX4 EX5 EX6 EX7 EX7A

EXA 9.62
EXB 4.09
EXC 24.8
EXD 15.87
EXE 5.83
EXF 1.62

OS-1 45.02
OS-2 11.4
OS-3 1.11
OS-4 0.29

Tc TYP.

UNPLATTED
FUTURE WATERBURY DEVELOPMENT

WETLANDS

EXISTING STOCK POND

APPROX. LOCATION OF 100 YR. FEMA FLOODPLAIN

SEE APPENDIX FOR ALL OFF-SITE SWQ BASINS TRIBUTARY TO THE PROPOSED SWQ PONDS.

EXIST. OFF-SITE SWQ POND 4
0.52 AC-FT. WQCV REQ.
0.66 AC-FT. WQCV PROVIDED WITH INSTALLED CONCRETE OUTLET BOX AND ORIFICE PLATE

EXIST. IN-FLOW
5-YR. = 18 CFS
100-YR. = 133 CFS

EXIST. RELEASE
5-YR. = 13 CFS
100 YR. = 131 CFS

EX. 4'X4' CONC. OUTLET BOX W/ INTEGRAL MICROPOOL AND 24" RCP OUTLET PIPE

EXIST. DRAINAGE ESMT. (BY SEPARATE INSTRUMENT)

EXIST. OFF-SITE SWQ POND 2
0.34 AC-FT. WQCV REQ.
0.60 AC-FT. WQCV PROVIDED WITH INSTALLED CONCRETE OUTLET BOX AND ORIFICE PLATE

PROPOSED IN-FLOW
5-YR. = 10 CFS
100-YR. = 53 CFS

PROPOSED RELEASE
5-YR. = 0.4 CFS
100 YR. = 51 CFS

EXIST. (2) 8'x4' CBC

EXIST. OFF-SITE SWQ POND 3
(IN-LINE)
0.66 AC-FT. WQCV REQ.
1.2 AC-FT. WQCV PROVIDED WITHIN THE EXIST. STOCK POND

PROPOSED IN-FLOW
5-YR. = 69 CFS
100-YR. = 397 CFS

PROPOSED RELEASE
5-YR. = 69 CFS
100 YR. = 396 CFS

HISTORIC RELEASE
5-YR. = 76 CFS
100 YR. = 437 CFS

EX. 4'x4' CONC. OUTLET BOX W/ INTEGRAL MICROPOOL AND 24" RCP OUTLET PIPE AND EYC BLANKET AT SPILLWAY

EXIST. DRAINAGE ESMT. (REC.# 214087198)

EXIST. STOCK POND CONVERTED TO SWQ FOREBAY FOR MITIGATION OF 4-WAY RANCH FIL. 1 AND PORTIONS OF WATERBURY DEVELOPMENT

4 -WAY RANCH FILING NO. 1

LOT 14 LOT 15 LOT 35 LOT 36 LOT 37 LOT 38

BANDANERO DRIVE (60' ROW)
SUPERSTITION DRIVE (70' ROW)
SEBER DRIVE (70' ROW)
TRITCHER COURT (70' ROW)

PROPERTY LINE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR THE PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

REVISIONS

NO.	DESCRIPTION	DATE

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc.
Practical Civil Engineering Solutions
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tneinc.com

WATERBURY FILING 1 & 2

EXISITING MDDP DRAINAGE MAP 2
ONSITE MAP

DESIGNED BY	QNA
DRAWN BY	QNA
CHECKED BY	
H-SCALE	1"=100'
V-SCALE	
JOB NO.	1715.00
DATE ISSUED	11/22/22
SHEET NO.	2 OF 2

MATCHLINE SEE SHEET 2

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (TRIB. TO POND)	
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
EX STORM SEWER/CULVERT	
WETLANDS	
100 YR. FLOODPLAIN	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
EXISTING DIRECTION OF FLOW	
Tc PATH	

100 50 0 100 200

SCALE: 1" = 100'

EX 12" WATER LINE

UNPLATTED
FUTURE WATERBURY DEVELOPMENT

WETLANDS

PRE-H 1.33
PRE-4
PRE-3
PRE-5
PRE-C 6.33
PRE-D 15.52
PRE-C 2.00
PRE-7
PRE-2
PRE-6
PRE-F 0.62
PRE-C 19.08
PRE-1
PRE-B 12.35
PRE-A 4.61

OS-1 0.75
OS-2 9.15
OS-3 1.11
OS-4 0.56

12'W/x15'L SPILLWAY W/ D50=9" TYPE L RIPRAP BURY DEPTH =18"

22'W/x4'D, SPILLWAY W/ D50=9" TYPE L RIPRAP BURY DEPTH =18"

22'W/x4'D, SPILLWAY W/ D50=9" TYPE L RIPRAP BURY DEPTH =18"

22'W/x18'L SPILLWAY W/ D50=9" TYPE L RIPRAP BURY DEPTH =18"

5'W/x1.D50=9" TYPE L RIPRAP

22'W/WEL SPILLWAY W/ D50=9" TYPE L RIPRAP BURY DEPTH =18"

27'W/x23'L SPILLWAY W/ D50=9" TYPE L RIPRAP BURY DEPTH =18"

47'-6" RCP @ 2.46%

42" RCP @ 1.70%

72'-6" RCP @ 1.70%

TEMP. DIVERSION SWALE B-B

TEMP. DIVERSION SWALE C-C

TEMP. DIVERSION SWALE A-A

TEMP. DIVERSION SWALE E-E

TEMP. DIVERSION SWALE F-F

TEMPORARY SEDIMENT BASIN 1

TEMPORARY SEDIMENT BASIN 2

TEMPORARY SEDIMENT BASIN 3

TEMPORARY SEDIMENT BASIN 4

INSTALL TEMPORARY SLOPE DRAIN SEE DETAIL SHT 10

INSTALL TEMPORARY TRENCH DRAIN TYPICAL OF 2

DIVERSION SWALE E-E

EX STOCK POND

FILL IN BERM TO 6960

APPROX. LOCATION OF 100 YR. FEMA FLOODPLAIN

EXIST. OFF-SITE SWQ POND 4
0.52 AC-FT. WQCV REQ.
0.66 AC-FT. WQCV PROVIDED WITH INSTALLED CONCRETE OUTLET BOX AND ORIFICE PLATE

EXIST. IN-FLOW
5-YR. = 18 CFS
100-YR. = 133 CFS

EXIST. RELEASE
5-YR. = 13 CFS
100 YR. = 131 CFS

EX. 4'x4' CONC. OUTLET BOX W/ INTEGRAL MICROPOOL AND 24" RCP OUTLET PIPE

EXIST. DRAINAGE ESMT. (BY SEPARATE INSTRUMENT)

EXIST. OFF-SITE SWQ POND 2
0.34 AC-FT. WQCV REQ.
0.60 AC-FT. WQCV PROVIDED WITH INSTALLED CONCRETE OUTLET BOX AND ORIFICE PLATE

PROPOSED IN-FLOW
5-YR. = 10 CFS
100-YR. = 53 CFS

PROPOSED RELEASE
5-YR. = 0.4 CFS
100-YR. = 51 CFS

EXIST OFF-SITE SWQ POND 3
(IN-LINE)
0.66 AC-FT. WQCV REQ.
1.2 AC-FT. WQCV PROVIDED WITHIN THE EXIST. STOCK POND

PROPOSED IN-FLOW
5-YR. = 69 CFS
100-YR. = 397 CFS

PROPOSED RELEASE
5-YR. = 69 CFS
100 YR. = 396 CFS

HISTORIC RELEASE
5-YR. = 76 CFS
100 YR. = 437 CFS

EX. 4'X4' CONC. OUTLET BOX,W/ INTEGRAL MICROPOOL AND 24" RCP OUTLET PIPE AND EIC BLANKET AT SPILLWAY

EXIST. DRAINAGE ESMT. (REC.# 2140071B)

EXIST. STOCK POND CONVERTED TO SWQ FOREBAY FOR MITIGATION OF 4-WAY RANCH FIL. 1 AND PORTIONS OF WATERBURY DEVELOPMENT

EXIST. (2) 8'x4' CBC

APPROX. LOCATION OF 100 YR. FEMA FLOODPLAIN

SEE APPENDIX FOR ALL OFF-SITE SWQ BASINS TRIBUTARY TO THE PROPOSED SWQ PONDS.

UNPLATTED
FUTURE 4-WAY RANCH COMMERCIAL DEVELOPMENT

4-WAY RANCH FILING NO. 1
LOT 14
LOT 15
LOT 35
LOT 36
LOT 37

GILBERT DRIVE (60' ROW)
TBD TRAVIER COURT (60' ROW)
BANDANERO DRIVE (60' ROW)
PROPERTY LINE

REVISIONS		
NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR THE PURPOSE DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc.
Civil Engineering Surveying
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnesinc.com

WATERBURY FILING 1 & 2

EARLY GRADING DRAINAGE MAP 2
ONSITE MAP

DESIGNED BY	QNA
DRAWN BY	QNA
CHECKED BY	
H-SCALE	1"=100'
V-SCALE	
JOB NO.	1715.00
DATE ISSUED	11/22/22
SHEET NO.	1 OF 2

MDDP DRAINAGE REPORT ~ EARLY GRADING BASIN RUNOFF COEFFICIENT SUMMARY

BASIN	TOTAL AREA (AC)	IMPERVIOUS / DEVELOPED AREA			NONIMPERVIOUS / UNDEVELOPED AREA			WEIGHTED		WEIGHTED CA	
		AREA (AC)	C(5)	C(100)	AREA (AC)	C(5)	C(100)	C(5)	C(100)	CA(5)	CA(100)
PRE-A	4.61	0.00	0.45	0.59	4.61	0.09	0.36	0.09	0.36	**0.41**	**1.66**
PRE-B	12.35	0.00	0.45	0.59	12.35	0.09	0.36	0.09	0.36	**1.11**	**4.45**
PRE-C	19.08	0.00	0.45	0.59	19.08	0.09	0.36	0.09	0.36	**1.72**	**6.87**
PRE-D	15.52	0.00	0.45	0.59	15.52	0.09	0.36	0.09	0.36	**1.40**	**5.59**
PRE-E	6.33	0.00	0.45	0.59	6.33	0.09	0.36	0.09	0.36	**0.57**	**2.28**
PRE-F	0.62	0.00	0.45	0.59	0.62	0.09	0.36	0.09	0.36	**0.06**	**0.22**
PRE-G	2.00	0.00	0.45	0.59	2.00	0.09	0.36	0.09	0.36	**0.18**	**0.72**
PRE-H	1.33	0.00	0.45	0.59	1.33	0.09	0.36	0.09	0.36	**0.12**	**0.48**
OS-1	0.75	0.00	0.45	0.59	0.75	0.09	0.36	0.09	0.36	**0.07**	**0.27**
OS-2	11.15	0.00	0.45	0.59	11.15	0.09	0.36	0.09	0.36	**1.00**	**4.01**
OS-3	1.11	0.00	0.45	0.59	1.11	0.09	0.36	0.09	0.36	**0.10**	**0.40**
OS-4	0.56	0.00	0.45	0.59	0.56	0.09	0.36	0.09	0.36	**0.05**	**0.20**
OS-8	2.56	FLOW TAKEN FROM MERIDAIN RANCH MDDP									

MDDP ~ EARLY GRADING BASIN RUNOFF SUMMARY

BASIN	WEIGHTED		OVERLAND				STREET / CHANNEL FLOW				Tc	INTENSITY		TOTAL FLOWS	
	CA(5)	CA(100)	C(5)	Length (ft)	Height (ft)	Tc (min)	Length (ft)	Slope (%)	Velocity (fps)	Tc (min)	TOTAL (min)	I(5) (in/hr)	I(100) (in/hr)	Q(5) (cfs)	Q(100) (cfs)
PRE-A	0.41	1.66	0.25	100	2.5	11.7	909	1.4%	4.2	3.6	15.4	3.43	5.82	**1**	**10**
PRE-B	1.11	4.45	0.25	100	2.5	11.7	1612	1.3%	4.0	6.7	18.5	3.16	5.31	**4**	**24**
PRE-C	1.72	6.87	0.25	100	2.5	11.7	1308	1.3%	4.0	5.5	17.2	3.27	5.50	**6**	**38**
PRE-D	1.40	5.59	0.25	100	2	12.6	1297	1.6%	4.5	4.9	17.5	3.24	5.46	**5**	**30**
PRE-E	0.57	2.28	0.25	100	8	8.0	752	2.1%	5.1	2.5	10.5	4.00	6.94	**2**	**16**
PRE-F	0.06	0.22	0.25	64	2	8.7					8.7	4.26	7.47	**0**	**2**
PRE-G	0.18	0.72	0.25	161	5	13.9					13.9	3.58	6.12	**1**	**4**
PRE-H	0.12	0.48	0.25	67	2	9.1					9.1	4.21	7.36	**1**	**4**
OS-1	0.07	0.27	0.25	85	2	11.0	75	1.3%	4.0	0.3	11.4	3.88	6.70	**0**	**2**
OS-2	1.00	4.01	0.25	76	2	10.1	1427	2.1%	5.1	4.7	14.8	3.49	5.94	**4**	**24**
OS-3	0.10	0.40	0.25	100	9	7.7	329	2.5%	5.5	1.0	8.7	4.27	7.49	**0**	**3**
OS-4	0.05	0.20	0.25	100	2	12.6	127	2.4%	5.4	0.4	13.0	3.68	6.30	**0**	**1**
OS-8	FLOW TAKEN FROM MERIDAIN RANCH MDDP													**5**	**11**

MDDP ~ EARLY GRADING SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity		Flow		Facility Size
						I(5)	I(100)	Q(5)	Q(100)	
PRE1	PRE-B & OS-4	4.65	1.16	4.65	18.5	3.16	5.31	4	25	TSB 1
PRE2	PRE-C	19.08	1.72	6.87	17.2	3.27	5.50	6	38	TSB 2
PRE3	PRE-D & OS-3	16.63	1.50	5.99	17.5	3.24	5.46	5	33	TSB 3
PRE4	PRE-E & OS-1	7.07	0.64	2.55	10.5	4.00	6.94	3	18	TSB 4
PRE5	OS-8 & OS-2	13.71	1.00	4.01	14.8	3.49	5.94	9	35	EASTERN CHANNEL
PRE6	PRE-F	0.62	0.06	0.22	8.7	4.26	7.47	0	2	STAPLETON ROAD
PRE7	PRE-G, PRE-H & DPS PRE2-PRE5	59.82	5.15	20.61	17.5	3.24	5.46	25	147	EX GEICK RANCH CHANNEL

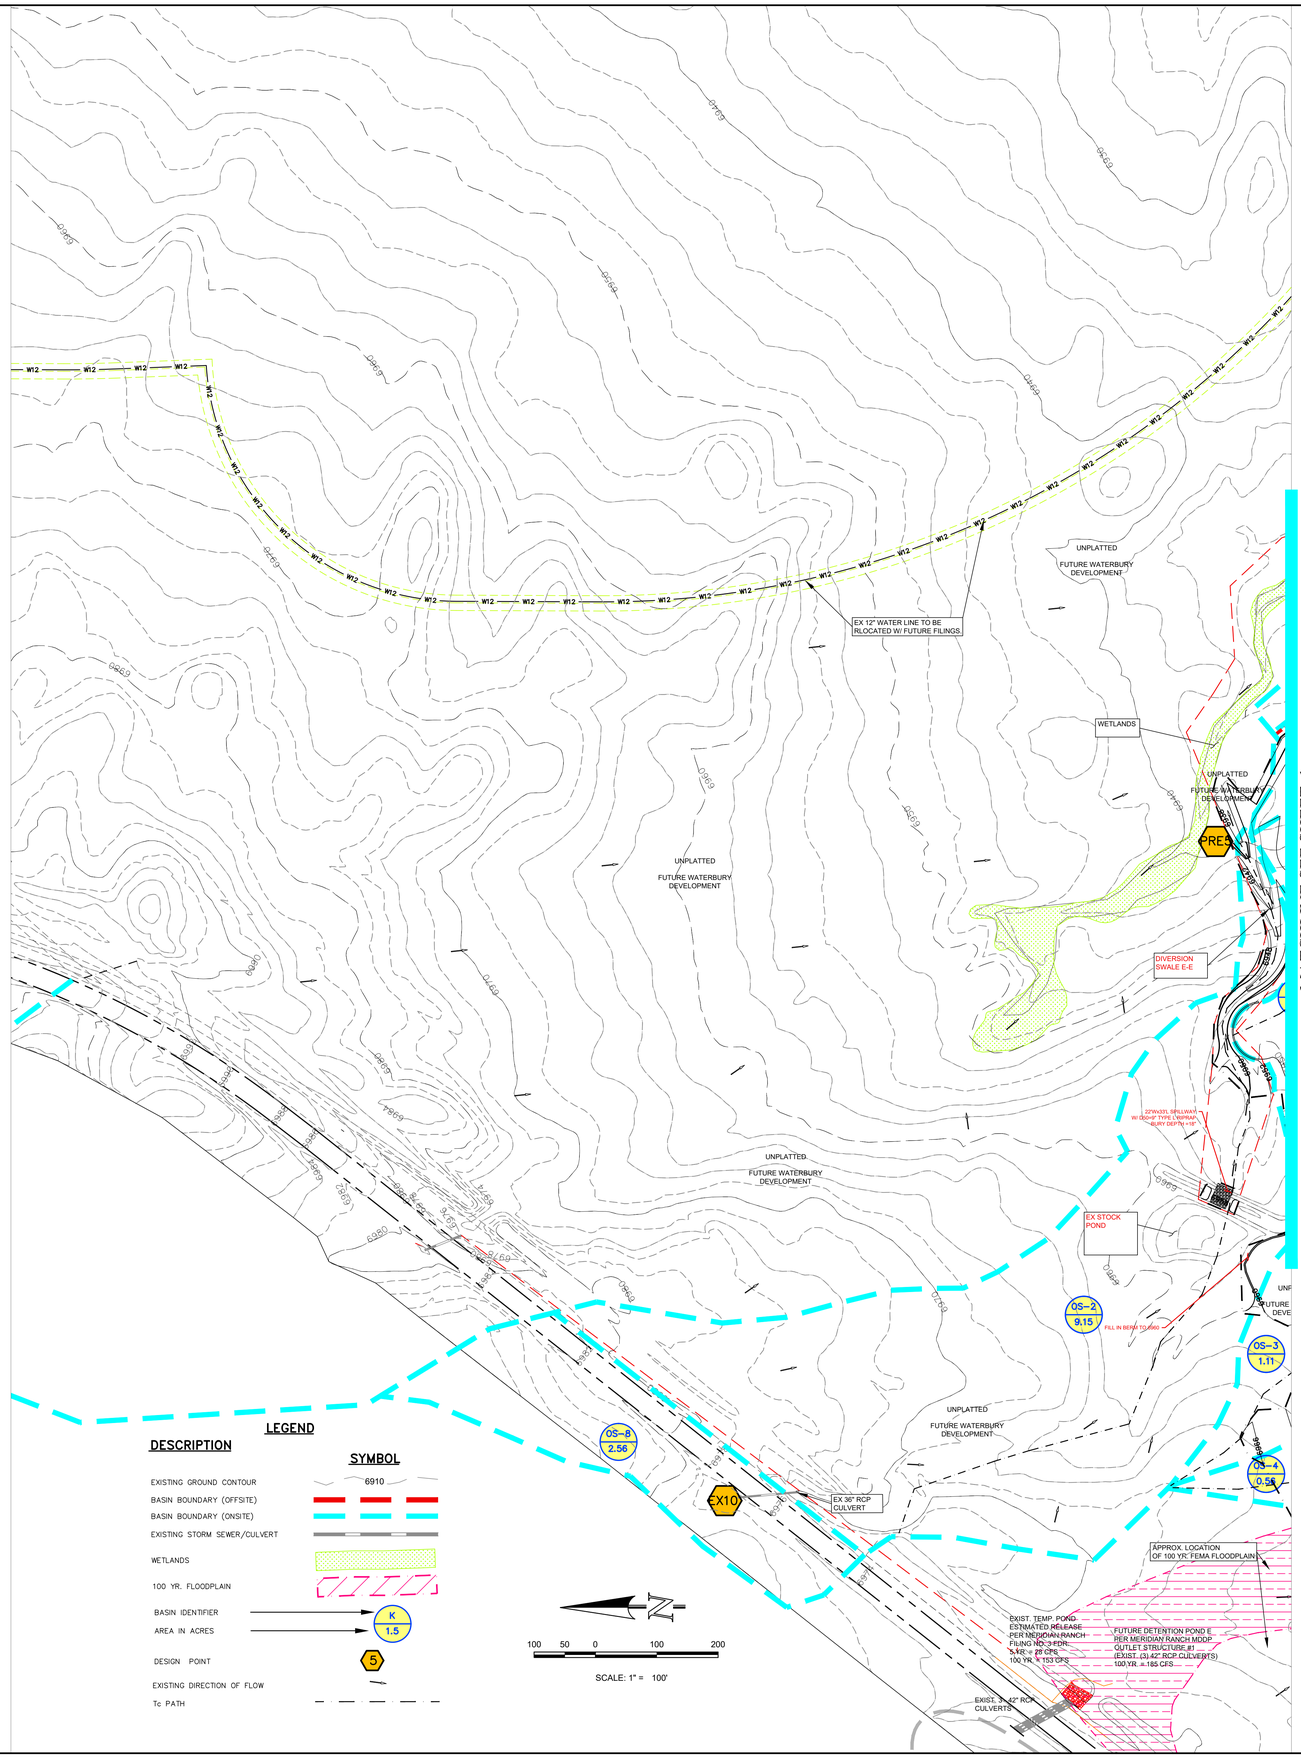

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY ALL APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR PRELIMINARY PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc.
Creative Civil Engineering Solutions
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnsinc.com

WATERBURY FILING 1 & 2

EARLY GRADING DRAINAGE MAP 2
OFFSITE MAP

DESIGNED BY	QNA
DRAWN BY	QNA
CHECKED BY	
H-SCALE	1"=100'
V-SCALE	
JOB NO.	1715.00
DATE ISSUED	11/22/22
SHEET NO.	2 OF 2

MDDP ~ PROPOSED SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity I(5)	Intensity I(100)	Flow Q(5)	Flow Q(100)	Facility Size
1	A	3.39	1.52	2.00	14.3	3.54	6.03	5	12	10' Type R Sump Inlet
2	C	0.86	0.39	0.51	6.9	4.58	8.14	2	4	5' Type R Sump Inlet
3	B1	2.30	1.03	1.36	14.2	3.55	6.05	4	8	5' Type R Sump Inlet
4	B2	3.58	1.61	2.11	14.8	3.49	5.93	6	13	10' Type R Sump Inlet
5	F & H	3.65	1.64	2.15	9.5	4.14	7.22	7	16	10' Type R Sump Inlet
6	D	2.11	0.95	1.24	11.4	3.87	6.69	4	8	5' Type R Sump Inlets
7	E	2.18	0.98	1.29	13.8	3.59	6.12	4	8	5' Type R Sump Inlets
7A	G1	0.53	0.24	0.31	5.0	5.00	9.06	1	3	5' Type R At-grade Inlet
7B	G2	0.69	0.31	0.41	5.0	5.00	9.06	2	4	5' Type R At-grade Inlet
8	DESIGN POINTS 1-7 & K	18.06	8.13	10.66	14.8	3.49	5.93	28	63	FSD Pond 1
9	OS-9	11.80						8	19	EX 36" RCP Culvert
10	OS-8	2.56						5	11	EX 36" RCP Culvert
10A	MERIDIAN POND E RELEASE	Meridian Ranch Filing 3 FDR Calculated Flows						28	185	EX 3-42" RCP Culverts
11	OS-5, I, DP10A (MERIDIAN POND E RELEASE)	Sum of Basins						34	216	PR 2-42" RCP Culverts
11A	DP 11 & BASIN J	Sum of Basins						37	222	PR 2-42" RCP Culverts
12	OS-6	1.06	0.48	0.63	10.1	4.05	7.04	2	4	18" RCP Culvert
13	TOTAL OFFISITE EX. STOCK POND INFLOW	Per "Final Drainage Report for Waterbury Filing No. 1" dated September 2010, by Classic Consulting						69	396	EX STOCK POND
14	L1	3.79	1.71	2.24	16.1	3.36	5.69	6	13	10' Type R Sump Inlet
15	L2	2.00	0.90	1.18	12.8	3.70	6.34	3	7	5' Type R Sump Inlet
16	O1	2.82	1.27	1.66	13.5	3.62	6.19	5	10	10' Type R Sump Inlet
17	O2	0.71	0.32	0.42	15.5	3.42	5.80	1	2	5' Type R Sump Inlet
18	DESIGN POINTS 14-17 & BASIN OS-4	20.23	5.18	5.50	16.1	3.36	5.69	17	31	Interim FSD Pond 2
19	Q1 & OS-Q1	5.78	2.60	3.41	22.4	2.88	4.78	8	16	10' Type R Sump Inlet
20	Q2 & OS-Q2	1.89	0.85	1.12	12.4	3.75	6.43	3	7	5' Type R Sump Inlet
21	R & OS-R	7.06	3.18	4.17	11.4	3.87	6.69	12	28	10' Type R At-grade Inlet
22	S1 & OS-S1 & DP 21 FLOWBY	8.34	4.42	5.64	16.7	3.32	5.60	15	32	10' Type R Sump Inlet
23	S2 & OS-S2	0.31	0.14	0.18	12.6	3.72	6.39	1	1	10' Type R Sump Inlet
22 & 23 SPLIT	S1, OS-S1, S2, OS-S2, & DP 21 FLOWBY	8.65	4.56	5.82	16.7	3.32	5.60	8	16	2-10' Type R Sump Inlets
24	T1	1.42	0.64	0.84	10.7	3.97	6.88	3	6	5' Type R Sump Inlets
25	T2 & OS-T2	1.99	0.90	1.18	13.5	3.63	6.20	3	7	5' Type R Sump Inlets
26	U1	4.38	1.97	2.58	14.3	3.54	6.03	7	16	10' Type R Sump Inlets
27	U2	1.89	0.85	1.11	13.8	3.59	6.12	3	7	5' Type R Sump Inlets
28	W	5.20	2.34	3.07	15.0	3.47	5.89	8	18	2-10' Type R Sump Inlets
29	DPS 19-28, 31-32, OFFSITE BASINS OS-1, 2, 3A, 3B, 7, & 9	82.44	36.10	47.71	22.4	2.88	4.78	112	247	FSD POND
30	Y & OS-10	3.76	0.46	1.43	13.5	3.62	6.19	2	9	Triple 36" RCP Culverts
30	FSD POND 3 EMERGENCY SPILLWAY RELEASE	MHFD DETENTION 100Y PEAK INFLOW							247	Triple 36" RCP Culverts
30A	FSD POND RELEASE & DP 30	MHFD DETENTION 100Y PEAK INFLOW						3	67	EAST CHANNEL
31	V	0.54	0.24	0.32	5.0	5.00	9.06	1	3	18" DIA INLETS
32	X	0.43	0.19	0.25	5.0	5.00	9.06	1	2	18" DIA INLETS
33	O-3	0.45	0.20	0.27	5.0	5.00	9.06	1	2	18" DIA INLETS
34	O-4	0.38	0.17	0.23	5.0	5.00	9.06	1	2	18" DIA INLETS

MDDP ~ PROPOSED BASIN RUNOFF SUMMARY

BASIN	WEIGHTED CA(5)	WEIGHTED CA(100)	OVERLAND C(5)	OVERLAND Length (ft)	OVERLAND Height (ft)	OVERLAND Tc (min)	STREET / CHANNEL FLOW Length (ft)	STREET / CHANNEL FLOW Slope (%)	STREET / CHANNEL FLOW Velocity (fps)	STREET / CHANNEL FLOW Tc (min)	Tc TOTAL (min)	INTENSITY I(5) (in/hr)	INTENSITY I(100) (in/hr)	TOTAL FLOWS Q(5) (cfs)	TOTAL FLOWS Q(100) (cfs)
A	1.52	2.00	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.3	3.54	6.03	5	12
B1	1.03	1.36	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.2	3.55	6.05	4	8
B2	1.61	2.11	0.25	100	2	12.6	550	1.5%	4.3	2.1	14.8	3.49	5.93	6	13
C	0.39	0.51	0.25	20	0.5	5.3	500	2.0%	4.9	1.7	6.9	4.58	8.14	2	4
D	0.95	1.24	0.25	80	2	10.5	300	2.5%	5.5	0.9	11.4	3.87	6.69	4	8
E	0.98	1.29	0.25	100	2	12.6	400	2.5%	5.5	1.2	13.8	3.59	6.12	4	8
F	0.98	1.29	0.25	50	2	7.1	620	1.5%	4.3	2.4	9.5	4.14	7.22	4	9
G1	0.24	0.31	0.25								5.0	5.00	9.06	1	3
G2	0.31	0.41	0.25								5.0	5.00	9.06	2	4
H	0.66	0.86	0.25	50	2	7.1	525	1.5%	4.3	2.0	9.2	4.19	7.33	3	6
I	0.97	2.12	0.25	80	4	8.4	250	2.0%	4.9	0.8	9.2	4.18	7.32	4	14
J	0.65	0.85	0.25	90	6	8.1	850	2.0%	4.9	2.9	10.9	3.94	6.81	3	6
K	0.69	1.37	0.25	100	18	6.1	80	1.0%	3.5	0.4	6.5	4.67	8.33	3	11
L1	1.71	2.24	0.25	100	2	12.6	860	1.4%	4.1	3.5	16.1	3.36	5.69	6	13
L2	0.90	1.18	0.25	55	1.1	9.4	860	1.4%	4.1	3.5	12.8	3.70	6.34	3	7
M1	0.44	0.58	0.25	70	1.5	10.3	200	2.0%	4.9	0.7	11.0	3.92	6.79	2	4
M2	0.16	0.21	0.25	65	3	7.7	0	0.0%	0.0	0.0	7.7	4.43	7.83	1	2
N	0.10	0.13	0.25								5.0	5.00	9.06	1	1
O1	1.27	1.66	0.25	100	2.5	11.7	460	1.5%	4.3	1.8	13.5	3.62	6.19	5	10
O2	0.32	0.42	0.25	100	2	12.6	850	2.0%	4.9	2.9	15.5	3.42	5.80	1	2
O3	0.20	0.27	0.25								5.0	5.00	9.06	1	2
O4	0.17	0.23	0.25								5.0	5.00	9.06	1	2
P	0.06	0.25	0.25								5.0	5.00	9.06	0	2
Q1	0.66	0.87	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	3	6
Q2	0.43	0.56	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	2	4
R	0.46	0.60	0.25	100	4	10.1	700	2.0%	4.9	2.4	12.4	3.75	6.44	2	4
S1	0.70	0.91	0.25	100	6	8.8	175	2.0%	4.9	0.6	9.4	4.16	7.26	3	7
S2	0.06	0.08	0.25								5.0	5.00	9.06	0	1
T1	0.64	0.84	0.25	55	1.1	9.4	390	2.0%	4.9	1.3	10.7	3.97	6.88	3	6
T2	0.55	0.73	0.25	100	2	12.6	245	2.0%	5.0	0.8	13.5	3.63	6.20	2	5
U1	1.97	2.58	0.25	100	2	12.6	520	2.3%	5.3	1.6	14.3	3.54	6.03	7	16
U2	0.85	1.11	0.25	100	2	12.6	385	2.3%	5.4	1.2	13.8	3.59	6.12	3	7
V	0.24	0.32	0.25								5.0	5.00	9.06	1	3
W	2.34	3.07	0.25	100	2	12.6	630	1.6%	4.4	2.4	15.0	3.47	5.89	8	18
X	0.19	0.25	0.25								5.0	5.00	9.06	1	2
Y	0.16	0.21	0.25								5.0	5.00	9.06	1	2
OS-1	5.31	6.97	0.25	100	2	12.6	690	2.0%	5.0	2.3	15.0	3.47	5.90	18	41
OS-2	5.19	6.80	0.25	100	2	12.6	1700	1.8%	4.6	6.1	18.7	3.14	5.27	16	36
OS-3A	0.35	0.47	0.25	55	1.1	9.4	480	1.3%	3.9	2.0	11.4	3.87	6.68	1	3
OS-3B	2.55	3.34	0.25	100	2	12.6	480	1.3%	3.9	2.0	14.7	3.50	5.95	9	20
OS-4	0.98	3.92	0.25	800	26	30.5					30.5	2.46	4.01	2	16
OS-5	0.51	2.03	0.25	80	5	7.8	1000	2.5%	5.5	3.0	10.8	3.96	6.85	2	14
OS-6	0.48	0.63	0.25	30	0.6	6.9	900	1.8%	4.7	3.2	10.1	4.05	7.04	2	4
OS-7	0.25	1.01									5.0	5.00	9.06	1	9
OS-8	FLOW TAKEN FROM MERIDIAN RANCH MDDP													5	11
OS-9	FLOW TAKEN FROM MERIDIAN RANCH MDDP													8	19
OS-10	0.31	1.23	0.25	100	2	12.6	300	2.7%	5.7	0.9	13.5	3.62	6.19	1	8
OS-Q1	1.94	2.54	0.25	200	5	16.6	1500	1.5%	4.3	5.8	22.4	2.88	4.78	6	12
OS-Q2	0.42	0.55	0.25	50	1	8.9	900	1.5%	4.3	3.5	12.4	3.75	6.43	2	4
OS-R	2.72	3.57	0.25	50	1	8.9	850	2.7%	5.8	2.5	11.4	3.87	6.69	11	24
OS-S1	2.51	3.30	0.25	100	2	12.6	920	1.2%	3.8	4.0	16.7	3.32	5.60	8	18
OS-S2	0.08	0.10	0.25	100	2	12.6					12.6	3.72	6.39	0	1
OS-T2	0.34	0.45	0.25	100	2	12.6					12.6	3.72	6.39	1	3

* PIPES ARE LISTED AT MAXIMUM SIZE REQUIRED TO ACCOMMODATE Q100 FLOWS AT MINIMUM GRADE. REFER TO INDIVIDUAL PIPE SHEETS FOR HYDRAULIC INFORMATION.

MDDP ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity I(5)	Intensity I(100)	Flow Q(5)	Flow Q(100)	Pipe Size*
1	DP 2	0.39	0.51	6.9	4.58	8.14	2	4	18" RCP
2	DP 1 & 2	1.91	2.51	14.3	3.54	6.03	7	15	24" RCP
3	DP 3	1.03	1.36	14.2	3.55	6.05	4	8	18" RCP
4	DP-4	1.61	2.11	14.8	3.49	5.93	6	13	18" RCP
5	DP 3 & 4	2.64	3.47	14.8	3.49	5.93	9	21	24" RCP
6	DP 1-4	4.56	5.97	14.8	3.49	5.93	16	35	36" RCP
7	DP-1-5	6.20	8.12	14.8	3.49	5.93	22	48	36" RCP
8	DP-6	0.95	1.24	11.4	3.87	6.69	4	8	18" RCP
9	DP-7	0.98	1.29	13.8	3.59	6.12	4	8	18" RCP
10	DP-6 & 7	1.97	2.58	13.8	3.59	6.12	7	16	24" RCP
10A	DP-7A	0.24	0.31	5.0	5.00	9.06	1	3	15" RCP
10B	DP-7A & 7B	0.55	0.72	5.0	5.00	9.06	3	7	18" RCP
10C	POND 1 RELEASE	2.95	3.87	13.8	3.59	6.12	0.4	14.5	18" RCP
11	DP-14	1.71	2.24	16.1	3.36	5.69	6	13	24" RCP
12	DP-15	0.90	1.18	12.8	3.70	6.34	3	7	18" RCP
13	DP 14 & 15	2.61	3.42	16.1	3.36	5.69	9	19	30" RCP
14	DP 16	1.27	1.66	13.5	3.62	6.19	5	10	24" RCP
15	DP 14, 15 & 16	3.88	5.08	16.1	3.36	5.69	13	29	36" RCP
16	DP 17	0.32	0.42	15.5	3.42	5.80	1	2	18" RCP
17	DP 14, 15, 16, 17, 33, & 34	4.57	6.00	16.1	3.36	5.69	15	34	36" RCP
17A	POND 2 RELEASE						0.2	15.1	18" RCP
18	DP 19	2.60	3.41	22.4	2.88	4.78	8	16	24" RCP
19	DP 20	0.85	1.12	12.4	3.75	6.43	3	7	18" RCP
20	DP 18 & 19	3.46	4.53	22.4	2.88	4.78	10	22	24" RCP
21	DP 21 PICK UP						8	14	18" RCP
22	DP 19, 20 & 21	6.23	7.46	22.4	2.88	4.78	18	36	30" RCP
23	DP 22	2.28	2.91	16.7	3.32	5.60	8	16	24" RCP
24	DP 23	2.28	2.91	16.7	3.32	5.60	8	16	24" RCP
25	DP 22 & 23	4.56	5.82	16.7	3.32	5.60	15	33	30" RCP
26	DP 19 -23	10.79	13.28	22.4	2.88	4.78	31	63	36" RCP
27	DP 24	0.64	0.84	10.7	3.97	6.88	3	6	18" RCP
28	DP 25	0.90	1.18	13.5	3.63	6.20	3	7	18" RCP
29	DP 19-25	12.32	15.29	22.4	2.88	4.78	36	73	36" RCP
30	DP 26	1.97	2.58	14.3	3.54	6.03	7	16	24" RCP
31	DP 19-26	14.29	17.88	22.4	2.89	4.79	41	86	42" RCP
32	DP 27	0.85	1.11	13.8	3.59	6.12	3	7	18" RCP
33	DP 19-27, & 31	15.38	19.31	22.4	2.88	4.78	44	92	42" RCP
34	DP 28 SPLIT	1.17	1.53	15.0	3.47	5.89	4	9	24" RCP
34A	29 & 32	2.53	3.32	13.84	3.59	6.12	9	20	30" RCP
35	Pond 3 Release	MHFD UD-DETENTION POND RELEASE					1.2	58.0	36" RCP
36	DP 30	FSD POND 3 EMERGENCY SPILLWAY RELEASE						247.2	TRIPLE 36" RCP
37	DP 31	0.24	0.32	5.00	5.00	9.06	1.2	3	15" HDPE
38	DP 32	0.19	0.25	5.00	5.00	9.06	1.2	2	15" HDPE
39	DP 33	0.20	0.27	5.00	5.00	9.06	1.2	2	15" HDPE
40	DP 34	0.17	0.23	5.00	5.00	9.06	1.2	2	15" HDPE

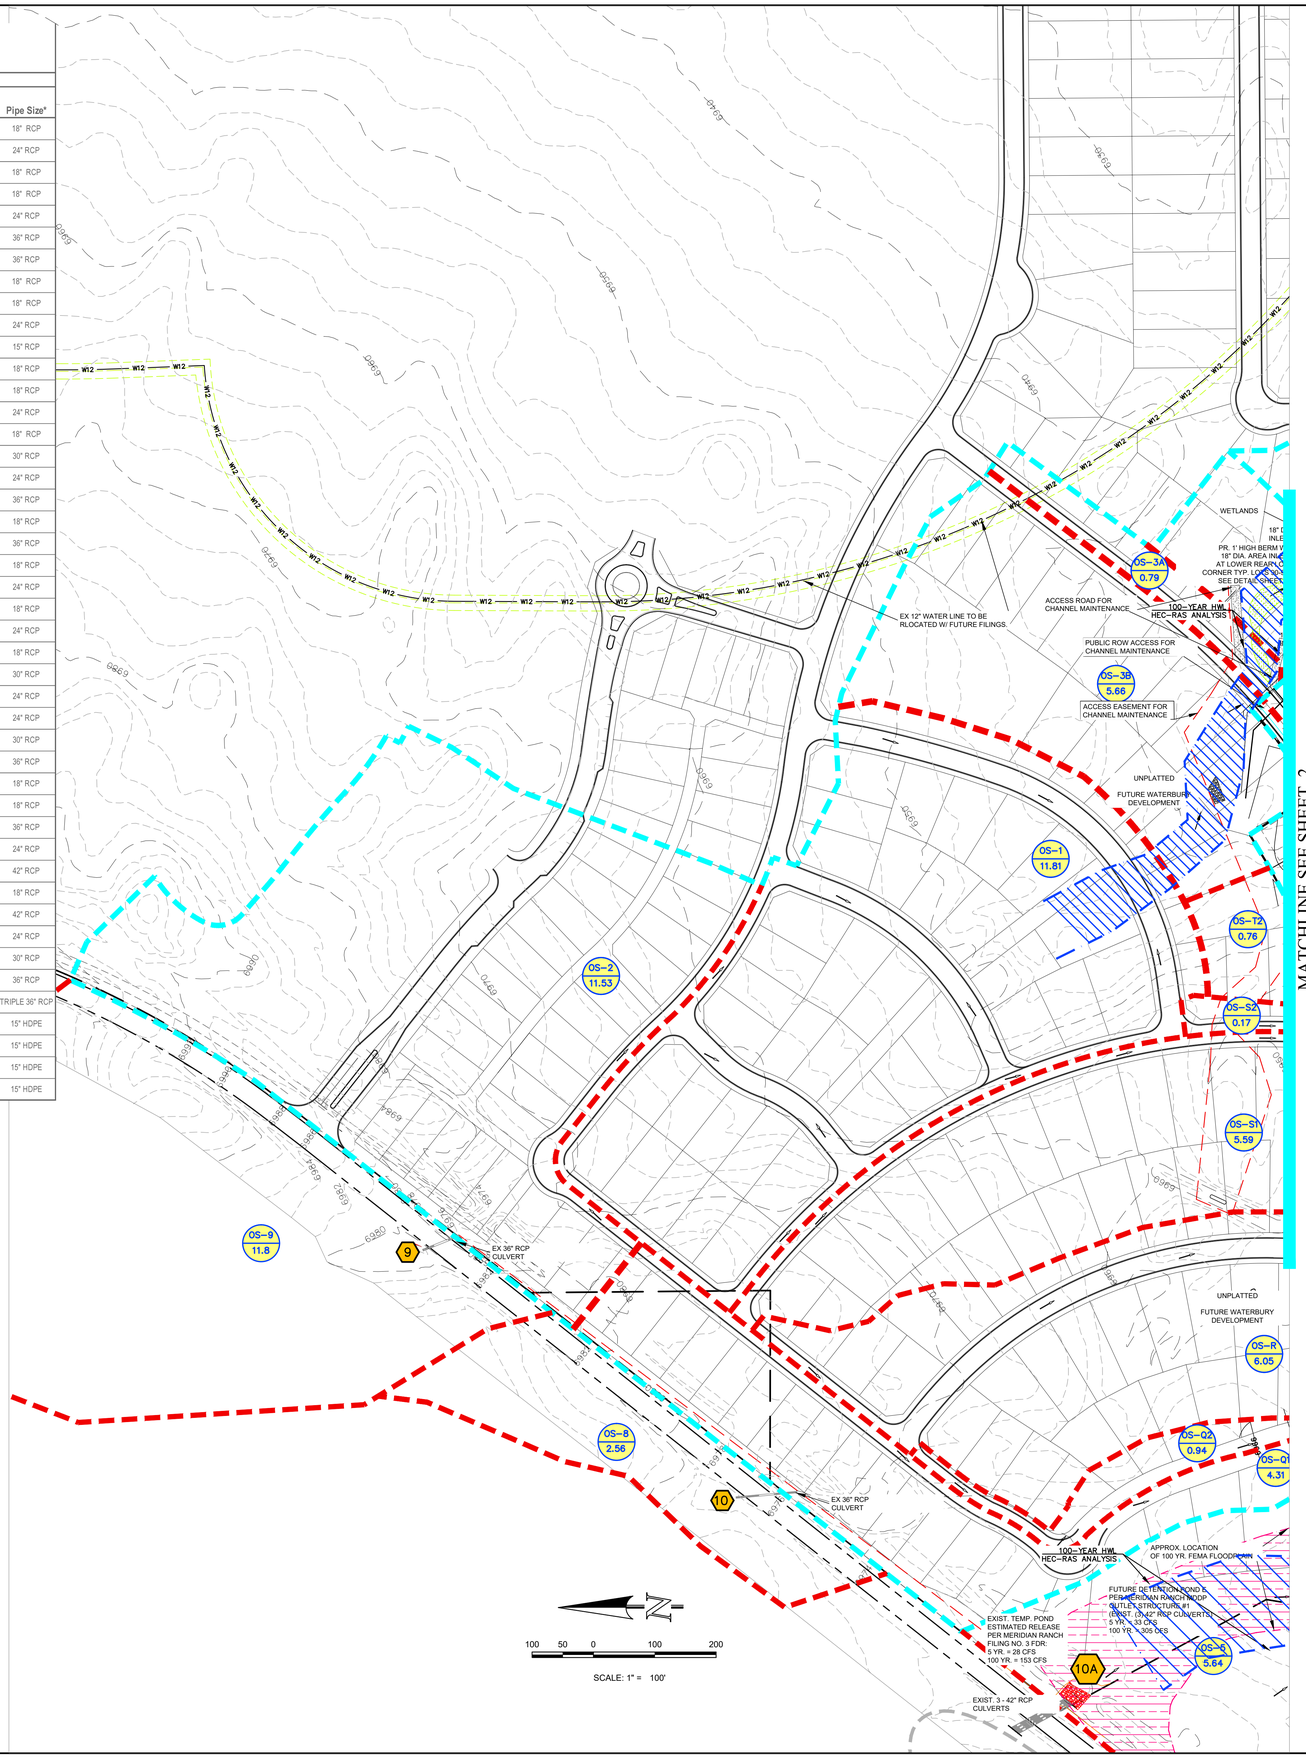

MATCHLINE SEE SHEET 2

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
STORM SEWER	
WETLANDS	
100 YR. FLOODPLAIN	
100-Y HWL PER HECRAS ANLYSIS	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
PIPE RUN	17
EXISTING DIRECTION OF FLOW	
Tc PATH	

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR REVIEW PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
P.O. BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc. "Trusted Civil Engineering Solutions"
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnesinc.com

WATERBURY FILING 1 & 2

MDDP
PROPOSED MDDP DRAINAGE MAP 1
OFFSITE MAP

DESIGNED BY	QNA
DRAWN BY	QNA
CHECKED BY	
H-SCALE	1"=100'
V-SCALE	
JOB NO.	1715.00
DATE ISSUED	11/22/22
SHEET NO.	1 OF 2

MATCHLINE SEE SHEET 1

MATCHLINE SEE SHEET 3

RUNOFF REDUCTION LEGEND

UNCONNECTED IMPERVIOUS AREA

RECEIVING PERVIOUS AREA

EXCLUDED UNDEVELOPED PERVIOUS AREA PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 – SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
STORM SEWER	
WETLANDS	
100 YR. FLOODPLAIN	
100-Y HWL PER HECRAS ANLYSIS	

BASIN IDENTIFIER — K, AREA IN ACRES — 1.5

DESIGN POINT — 5

PIPE RUN — 17

EXISTING DIRECTION OF FLOW

Tc PATH

100 50 0 100 200

SCALE: 1" = 100'

MDDP PBMP SUMMARY TABLE

BASINS	PBMP TRIB. AREA (AC)	PBMP
A, B1, B2, C, D, E, F, G1, G2, H, & K	22.34	FSD POND 1
L1, L2, O1, O2, O3, O4, & OS-4	21.06	FSD POND 2
Q1, OS-Q1, Q2, OS-Q2, R, OS-R, S1, OS-S1, S2, OS-S2, T1, T2, OS-T2,U1, U2, V, X, W, OS-1, OS-2, OS-3A, OS-3B, OS- 7, & OS-9	82.44	FSD POND 3
I, J, M1, P, & Y	8.45	EXCLUDED*
M2 & N	0.58	RUNOFF REDUCTION**

*EXCLUDED UNDEVELOPED PERVIOUS AREA PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 - SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

**UD-BMP VERSION 3.07 RUNOFF REDUCTION WAS USED TO SHOW THAT THIS AREA HAS 100% WQCV REDUCTION BASED UPON THE UNCONNECTED IMPERVIOUS AREA BEING ROUTED OVER THE RECEIVING PERVIOUS AREA.

NOTE:
OFFSITE FLOWS FROM FUTURE BASINS TO THE NORTH ARE ACCOUNTED FOR IN THE DESIGN AND SIZING OF POND 3. THE EXACT LOCATION OF THE PIPE DISCHARGE INTO THE POND IS NOT KNOWN AT THIS TIME. WHEN THE AREA IS DEVELOPED THE FINAL DRAINAGE REPORT AND CONSTRUCTION DRAWINGS FOR THE DEVELOPMENTS WILL DETAIL THE STORM DRAIN INTO THE POND AND ANY POND UPGRADES WILL BE DETAILED AT THAT TIME.

PROPOSED FSD POND 3
(1.398 AC-FT. WQCV)
(3.231 AC-FT. EURV)
(7.398 AC-FT 100-Y
(3:1 SLOPES / 8' MAX. DEPTH)
PROP. DESIGN POINT IN-FLOW
5-YR. = 112 CFS
100-YR. = 246 CFS
PROP. MHFD UD DET IN-FLOW
5-YR. = 99.5 CFS
100-YR. = 247.2 CFS
PROPOSED RELEASE
5-YR. = 1.2 CFS
100 YR. = 58.0 CFS

PROPOSED FSD POND 2
(0.241 AC-FT. WQCV)
(0.278 AC-FT. EURV)
(1.027 AC-FT 100-Y)
(3:1 SLOPES / 8' MAX. DEPTH)
PROP. DESIGN POINT IN-FLOW
5-YR. = 17 CFS
100-YR. = 31 CFS
PROP. MHFD UD DET IN-FLOW
5-YR. = 7.7 CFS
100-YR. = 29.3 CFS
PROPOSED RELEASE
5-YR. = 0.2 CFS
100 YR. =15.1 CFS

PROPOSED FSD POND 1
(0.391 AC-FT. WQCV)
(1.002 AC-FT. EURV)
(2.154 AC-FT 100-Y)
(3:1 SLOPES / 8' MAX. DEPTH)
PROP. DESIGN POINT IN-FLOW
5-YR. = 26 CFS
100-YR. = 59 CFS
PROP. MHFD UD DET IN-FLOW
5-YR. = 24.5 CFS
100-YR. = 60.0 CFS
PROPOSED RELEASE
5-YR. = 0.4 CFS
100 YR. =14.5 CFS

EXIST OFF-SITE SWQ POND 3 (IN-LINE)
0.66 AC-FT. WQCV REQ.
1.2 AC-FT. WQCV PROVIDED WITHIN THE EXIST. STOCK POND

PROPOSED IN-FLOW
5-YR. = 69 CFS
100-YR. = 397 CFS

PROPOSED RELEASE
5-YR. = 69 CFS
100 YR. = 396 CFS

HISTORIC RELEASE
5-YR. = 76 CFS
100 YR. = 437 CFS

EXIST. OFF-SITE SWQ POND 1
0.52 AC-FT. WQCV REQ.
0.66 AC-FT. WQCV PROVIDED WITH INSTALLED CONCRETE OUTLET BOX AND ORIFICE PLATE

EXIST. IN-FLOW
5-YR. = 18 CFS
100-YR. = 133 CFS

EXIST. RELEASE
5-YR. = 13 CFS
100 YR. = 131 CFS

EXIST. OFF-SITE SWQ POND 2
0.34 AC-FT. WQCV REQ.
0.60 AC-FT. WQCV PROVIDED WITH INSTALLED CONCRETE OUTLET BOX AND ORIFICE PLATE

PROPOSED IN-FLOW
5-YR. = 10 CFS
100-YR. = 53 CFS

PROPOSED RELEASE
5-YR. = 0.4 CFS
100 YR. = 51 CFS

SEE APPENDIX FOR ALL OFF-SITE SWQ BASINS TRIBUTARY TO THE PROPOSED SWQ PONDS.

STA. 1350 TO STA 1450
100 LF OF SELECTIVE RIPRAP BANK STABILIZATION

STA. 1850 TO STA 1950
100 LF OF SELECTIVE RIPRAP BANK STABILIZATION

STA. 250 TO STA 550
100 LF OF SELECTIVE RIPRAP BANK STABILIZATION

STA 14+00.00 INSTALL SHEET PILE CHECK STRUCTURE W/ CONCRETE CAP, TOP=6944.00 BOT=6941.00 SEE SHEET 10 FOR DETAILS 9.27 & 9.28

APPROX. LOCATION OF 100 YR. FEMA FLOODPLAIN

EX. 4'x4' CONC. OUTLET BOX W/ INTEGRAL MICROPOOL AND 24" RCP OUTLET PIPE

EXIST. (2) 4' HIGH x 8' WIDE CBC

EXIST. DRAINAGE ESMT. (BY SEPARATE INSTRUMENT)

HAUSMEN EASEMENT ACCESS FOR CHANNEL MAINTENANCE

EXIST. DRAINAGE ESMT. (REC.# 214087198)

EXIST. STOCK POND CONVERTED TO SWQ FOREBAY FOR MITIGATION OF 4-WAY RANCH FIL. 1 AND PORTIONS OF WATERBURY DEVELOPMENT

PROPERTY LINE

4-WAY RANCH FILING NO. 1 LOT 13

4-WAY RANCH FILING NO. 1 LOT 14

4-WAY RANCH FILING NO. 1 LOT 15

4-WAY RANCH FILING NO. 1 LOT 37

LOT 35

LOT 36

FUTURE C&G

UNPLATTED FUTURE 4-WAY RANCH COMMERCIAL DEVELOPMENT

UNPLATTED FUTURE WATERBURY DEVELOPMENT

MAINT. ACCESS

TRACT A

TRACT B

TRACT C

TRACT D

TRACT E

TRACT G

TRACT H

BEECH CREEK DR.

SAYBROOK ROAD

MANORHAVEN WAY

SUNRISE MEADOW RD

SANDY NECK WAY

MASONBORO WAY

MEGANSETT WAY

MOODY POND ST

FISH CAMP DR.

PECONIC WAY

THATCHER COURT (70' ROW)

GILBERT DRIVE (70' ROW)

BANDMERO DRIVE (80' ROW)

STABLES VIEW (100' ROW)

GUNNISON MEADOW RD

GRAVEL ACCESS ROAD FOR CHANNEL MAINTENANCE

ACCESS ROAD FOR CHANNEL MAINTENANCE

ACCESS EASEMENT FOR CHANNEL MAINTENANCE

PUBLIC ROW ACCESS FOR CHANNEL MAINTENANCE

30' UTIL/DRAINAGE EASEMENT REC # 215114398

100-YEAR HWL HEC-RAS ANALYSIS

180-YEAR HWL HEC-RAS ANALYSIS

DUAL 42-RCP CULVERTS

18" RCP CULVERT

WETLANDS

100-YR. FLOODPLAIN

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR PRELIMINARY PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc.
Trusted Civil Engineering Since 1999
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnesinc.com

WATERBURY FILING 1 & 2

MDDP
PROPOSED MDDP DRAINAGE MAP 2
ONSITE MAP

DESIGNED BY	QNA
DRAWN BY	QNA
CHECKED BY	
H-SCALE	1"=100'
V-SCALE	
JOB NO.	1715.00
DATE ISSUED	11/22/22
SHEET NO.	2 OF 2

MATCHLINE SEE SHEET 2

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova
Engineering, Inc.
Creative Civil Engineering Solutions
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnein.com

WATERBURY FILING 1 & 2

MDDP
POND TRIBUTARY AREA
OFFSITE MAP

DESIGNED BY	QNA
DRAWN BY	QNA
CHECKED BY	
Y-SCALE	1"=100'
X-SCALE	
JOB NO.	175.00
DATE ISSUED	11/22/22
SHEET NO.	1 OF 2

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DEVIANCES ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, APPROVES THEIR USE ONLY FOR THE PURPOSES DESIGNATED BY WRITTEN AUTHORIZATION. TERRA NOVA ENGINEERING AND SURVEYING, INC.

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
STORM SEWER	
WETLANDS	
100 YR. FLOODPLAIN	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
PIPE RUN	(5)
EXISTING DIRECTION OF FLOW	
Tc PATH	

POND TRIBUTARY AREA

- POND 1 TRIBUTARY AREA
- POND 2 TRIBUTARY AREA
- POND 3 TRIBUTARY AREA
- EXCLUDED UNDEVELOPED PERVIOUS AREA// 100% RUNOFF REDUCTION AREA

SCALE: 1" = 100'

MATCHLINE SEE SHEET 1

POND TRIBUTARY AREA

POND 1 TRIBUTARY AREA

POND 2 TRIBUTARY AREA

POND 3 TRIBUTARY AREA

EXCLUDED UNDEVELOPED PERVIOUS AREA PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 – SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
STORM SEWER	
WETLANDS	
100 YR. FLOODPLAIN	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
PIPE RUN	17
EXISTING DIRECTION OF FLOW	
Tc PATH	

SCALE: 1" = 100'

PROPOSED FSD POND 1
(0.091 AC-FT WQCV)
(1.802 AC-FT EURV)
(2.154 AC-FT 100-YR)
(5:1 SLOPES / 6' MAX DEPTH)
PROP. DESIGN POINT IN-FLOW
5-YR = 36 CFS
100-YR = 69 CFS
PROP. MHFD UD DET IN-FLOW
5-YR = 24.5 CFS
100-YR = 60.8 CFS
PROPOSED RELEASE
5-YR = 0.4 CFS
100-YR =14.5 CFS

PROPOSED FSD POND 2
(1.241 AC-FT WQCV)
(1.670 AC-FT EURV)
(1.020 AC-FT 100-YR)
(3:1 SLOPES / 8' MAX DEPTH)
PROP. DESIGN POINT IN-FLOW
5-YR = 11 CFS
100-YR = 31 CFS
PROP. MHFD UD DET IN-FLOW
5-YR = 10.2 CFS
100-YR = 30.0 CFS
PROPOSED RELEASE
5-YR = 0.3 CFS
100-YR = 14.1 CFS

PROPOSED FSD POND 3
(1.396 AC-FT WQCV)
(3.236 AC-FT EURV)
(1.398 AC-FT 100-YR)
(3:1 SLOPES / 8' MAX DEPTH)
PROP. DESIGN POINT IN-FLOW
5-YR = 11.2 CFS
100-YR = 28.6 CFS
PROP. MHFD UD DET IN-FLOW
5-YR = 9.5 CFS
100-YR = 24.7 CFS
PROPOSED RELEASE
5-YR = 1.3 CFS
100-YR = 5.4 CFS

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR REVIEW PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURES
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc.
Creative Civil Engineering Solutions
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnsinc.com

WATERBURY FILING 1 & 2

MDDP
POND TRIBUTARY AREA
ONSITE MAP

DESIGNED BY QNA
DRAWN BY QNA
CHECKED BY
H-SCALE 1"=100'
V-SCALE
JOB NO. 1715.00
DATE ISSUED 11/22/22
SHEET NO. 2 OF 2

PELIMINARY DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Area (AC)	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity I(5)	Intensity I(100)	Flow Q(5)	Flow Q(100)	Facility Size
1	A	3.39	1.52	2.00	14.3	3.54	6.03	5	12	10' Type R Sump Inlet
2	C	0.86	0.39	0.51	6.9	4.58	8.14	2	4	5' Type R Sump Inlet
3	B1	2.30	1.03	1.36	14.2	3.55	6.05	4	8	5' Type R Sump Inlet
4	B2	3.58	1.61	2.11	14.8	3.49	5.93	6	13	10' Type R Sump Inlet
5	F & H	3.65	1.64	2.15	9.5	4.14	7.22	7	16	10' Type R Sump Inlet
6	D	2.11	0.95	1.24	11.4	3.87	6.69	4	8	5' Type R Sump Inlets
7	E	2.18	0.98	1.29	13.8	3.59	6.12	4	8	5' Type R Sump Inlets
7A	G1	0.53	0.24	0.31	5.0	5.00	9.06	1	3	5' Type R At-grade Inlet
7B	G2	0.69	0.31	0.41	5.0	5.00	9.06	2	4	5' Type R At-grade Inlet
8	DESIGN POINTS 1-7 & K	18.06	8.13	10.66	14.8	3.49	5.93	28	63	FSD Pond 1
9	OS-9	11.80						8	19	EX 36" RCP Culvert
10	OS-8	2.56						5	11	EX 36" RCP Culvert
10A	MERIDIAN POND E RELEASE	Meridian Ranch Filing 3 FDR Calculated Flows						28	185	EX 3-42" RCP Culverts
11	OS-5, I, OS-& MERIDIAN POND E RELEASE	Sum of Basins						34	216	PR 2-42" RCP Culverts
11A	DP 11 & BASIN J	Sum of Basins						37	222	PR 2-42" RCP Culverts
12	OS-6	1.06	0.48	0.63	10.1	4.05	7.04	2	4	18" RCP Culvert
13	TOTAL OFFSITE EX. STOCK POND INFLOW	Per "Final Drainage Report for Waterbury Filing No. 1" dated September 2016, by Classic Consulting						69	396	EX STOCK POND
14	L1	3.79	1.71	2.24	16.1	3.36	5.69	6	13	10' Type R Sump Inlet
15	L2	2.00	0.90	1.18	16.1	3.36	5.69	3	7	5' Type R Sump Inlet
16	O1	2.82	1.27	1.66	13.5	3.62	6.19	5	10	10' Type R Sump Inlet
17	O2	0.71	0.32	0.42	15.5	3.42	5.80	1	2	5' Type R Sump Inlet
18	DESIGN POINTS 14-17 & BASIN OS-4	20.23	5.18	5.50	16.1	3.36	5.69	17	31	Interim FSD Pond 2
19*	**Q1 & OS-Q1**	**1.81**	**0.69**	**0.99**	**13.2**	**3.66**	**6.27**	**3**	**6**	**10' Type R Sump Inlet**
20*	**Q2 & OS-Q2**	**1.18**	**0.45**	**0.65**	**9.5**	**4.14**	**7.24**	**2**	**5**	**5' Type R Sump Inlet**
21*	**R & OS-R**	**2.06**	**0.55**	**0.98**	**12.4**	**3.75**	**6.44**	**2**	**6**	**10' Type R At-grade Inlet**
22*	**S1 & OS-S1**	**1.86**	**0.72**	**1.02**	**12.4**	**3.75**	**6.44**	**3**	**7**	**10' Type R Sump Inlet**
23*	**S2 & OS-S2**	**0.27**	**0.07**	**0.13**	**5.0**	**5.00**	**9.06**	**0**	**1**	**10' Type R Sump Inlet**
24*	**T1**	**1.42**	**0.64**	**0.84**	**10.7**	**3.97**	**6.88**	**3**	**6**	**5' Type R Sump Inlets**
25*	**T2 & OS-T2**	**1.54**	**0.58**	**0.84**	**13.5**	**3.63**	**6.20**	**2**	**5**	**5' Type R Sump Inlets**
26*	**U1**	**4.38**	**1.97**	**2.58**	**14.3**	**3.54**	**6.03**	**7**	**16**	**10' Type R Sump Inlets**
27*	**U2**	**1.89**	**0.85**	**1.11**	**13.8**	**3.59**	**6.12**	**3**	**7**	**5' Type R Sump Inlets**
28	**W**	**5.20**	**2.34**	**3.07**	**15.0**	**3.47**	**5.89**	**8**	**18**	**2-10' Type R Sump Inlets**
29*	**DESIGN POINTS 19-28 & OS-7**	**24.41**	**9.13**	**13.21**	**15.0**	**3.47**	**5.89**	**32**	**78**	**FSD POND 3**
E-E*	**OS-2 & OS-8**	**14.58**	**2.66**	**6.20**	**18.4**	**3.17**	**5.32**	**8**	**33**	**DIVERSION SWALE E-E**
30*	**Y, OS-1, OS-2, OS-8 & OS-9**	**67.82**	**9.32**	**20.34**	**21.1**	**2.97**	**4.94**	**36**	**120**	**Triple 36" RCP Culverts**
31	V	0.54	0.24	0.32	5.0	5.00	9.06	1	3	18" DIA INLETS
32	X	0.43	0.19	0.25	5.0	5.00	9.06	1	2	18" DIA INLETS
33	O-3	0.45	0.20	0.27	5.0	5.00	9.06	1	2	18" DIA INLETS
34	O-4	0.38	0.17	0.23	5.0	5.00	9.06	1	2	18" DIA INLETS

DESIGN POINT* = DESIGN POINT REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM

PELIMINARY DRAINAGE REPORT ~ PIPE ROUTING SUMMARY

Pipe Run	Contributing Design Points/Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity I(5)	Intensity I(100)	Flow Q(5)	Flow Q(100)	Pipe Size*
1	DP 2	0.39	0.51	6.9	4.58	8.14	2	4	18" RCP
2	DP 1 & 2	1.91	2.51	14.3	3.54	6.03	7	15	24" RCP
3	DP 3	1.03	1.36	14.2	3.55	6.05	4	8	18" RCP
4	DP-4	1.61	2.11	14.8	3.49	5.93	6	13	18" RCP
5	DP 3 & 4	2.64	3.47	14.8	3.49	5.93	9	21	24" RCP
6	DP 1-4	4.56	5.97	14.8	3.49	5.93	16	35	36" RCP
7	DP-1-5	6.20	8.12	14.8	3.49	5.93	22	48	36" RCP
8	DP-6	0.95	1.24	11.4	3.87	6.69	4	8	18" RCP
9	DP-7	0.98	1.29	13.8	3.59	6.12	4	8	18" RCP
10	DP-6 & 7	1.93	2.53	13.8	3.59	6.12	7	15	24" RCP
10A	DP-7A	0.24	0.31	5.0	5.00	9.06	1	3	15" RCP
10B	DP-7A & 7B	0.55	0.72	5.0	5.00	9.06	3	7	18" RCP
10C	Pond 1 Release						0.4	14.5	18" RCP
11	DP-14	1.71	2.24	16.1	3.36	5.69	6	13	24" RCP
12	DP-15	0.90	1.18	16.1	3.36	5.69	3	7	18" RCP
13	DP 14 & 15	2.61	3.42	16.1	3.36	5.69	9	19	30" RCP
14	DP 16	1.27	1.66	13.5	3.62	6.19	5	10	24" RCP
15	DP 14, 15 & 16	3.88	5.08	16.1	3.36	5.69	13	29	36" RCP
16	DP 17	0.32	0.42	15.5	3.42	5.80	1	2	18" RCP
17	DP 14, 15, 16, & 17	4.20	5.50	16.1	3.36	5.69	14	31	36" RCP
17A	Pond 2 Release						1.1	2.4	18" RCP
18*	**DP 19**	**0.69**	**0.99**	**13.2**	**3.66**	**6.27**	**3**	**6**	**24" RCP**
19*	**DP 20**	**0.45**	**0.65**	**9.5**	**4.14**	**7.24**	**2**	**5**	**18" RCP**
20*	**DP 19 & 20**	**1.15**	**1.64**	**13.2**	**3.66**	**6.27**	**4**	**10**	**24" RCP**
21*	**DP 21 PICK UP**						**2**	**6**	**18" RCP**
22*	**DP 19, 20 & 21**	**1.69**	**2.59**	**13.2**	**3.66**	**6.27**	**6**	**16**	**30" RCP**
23*	**DP 22**	**0.72**	**1.02**	**12.4**	**3.75**	**6.44**	**3**	**7**	**24" RCP**
24*	**DP 23**	**0.07**	**0.13**	**5.0**	**5.00**	**9.06**	**0**	**1**	**24" RCP**
25*	**DP 22 & 23**	**0.80**	**1.15**	**12.4**	**3.75**	**6.44**	**3**	**7**	**30" RCP**
26*	**DP 19 -23**	**2.49**	**3.74**	**13.2**	**3.66**	**6.27**	**9**	**23**	**36" RCP**
27*	**DP 24**	**0.64**	**0.84**	**10.7**	**3.97**	**6.88**	**3**	**6**	**18" RCP**
28*	**DP 25**	**0.58**	**0.84**	**13.5**	**3.63**	**6.20**	**2**	**5**	**18" RCP**
29*	**DP 19-25**	**3.71**	**5.42**	**13.5**	**3.63**	**6.20**	**13**	**34**	**36" RCP**
30*	**DP 26**	**1.97**	**2.58**	**14.3**	**3.54**	**6.03**	**7**	**16**	**24" RCP**
31*	**DP 19-26**	**5.68**	**8.00**	**14.3**	**3.54**	**6.03**	**20**	**48**	**42" RCP**
32*	**DP 27**	**0.85**	**1.11**	**13.8**	**3.59**	**6.12**	**3**	**7**	**18" RCP**
33*	**DP 19-27 & 31**	**6.77**	**9.43**	**14.3**	**3.54**	**6.03**	**24**	**57**	**42" RCP**
34	DP 28	2.34	3.07	15.03	3.47	5.89	8	18	24" RCP
34A	29 & 32	2.53	3.32	15.0	3.47	5.89	9	20	30" RCP
35	Pond 3 Release	MHFD UD-DETENTION POND RELEASE					1	58	36" RCP
36*	DP 30	SUM OF BASINS					36	120	TRIPLE 36" RCP
37	DP 31	0.24	0.32	5.00	5.00	9.06	1	3	15" HDPE
38	DP 32	0.19	0.25	5.00	5.00	9.06	1	2	15" HDPE
39	DP 33	0.20	0.27	5.00	5.00	9.06	1	2	15" HDPE
40	DP 34	0.17	0.23	5.00	5.00	9.06	1	2	15" HDPE

PIPE RUN* = PIPE RUN REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM

PELIMINARY DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

BASIN	WEIGHTED CA(5)	WEIGHTED CA(100)	OVERLAND C(5)	OVERLAND Length (ft)	OVERLAND Height (ft)	OVERLAND Tc (min)	STREET / CHANNEL FLOW Length (ft)	STREET / CHANNEL FLOW Slope (%)	STREET / CHANNEL FLOW Velocity (fps)	STREET / CHANNEL FLOW Tc (min)	Tc TOTAL (min)	INTENSITY I(5) (in/hr)	INTENSITY I(100) (in/hr)	TOTAL FLOWS Q(5) (cfs)	TOTAL FLOWS Q(100) (cfs)
A	1.52	2.00	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.3	3.54	6.03	5	12
B1	1.03	1.36	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.2	3.55	6.05	4	8
B2	1.61	2.11	0.25	100	2	12.6	550	1.5%	4.3	2.1	14.8	3.49	5.93	6	13
C	0.39	0.51	0.25	20	0.5	5.3	500	2.0%	4.9	1.7	6.9	4.58	8.14	2	4
D	0.95	1.24	0.25	80	2	10.5	300	2.5%	5.5	0.9	11.4	3.87	6.69	4	8
E	0.98	1.29	0.25	100	2	12.6	400	2.5%	5.5	1.2	13.8	3.59	6.12	4	8
F	0.98	1.29	0.25	50	2	7.1	620	1.5%	4.3	2.4	9.5	4.14	7.22	4	9
G1	0.24	0.31	0.25								5.0	5.00	9.06	1	3
G2	0.31	0.41	0.25								5.0	5.00	9.06	2	4
H	0.66	0.86	0.25	50	2	7.1	525	1.5%	4.3	2.0	9.2	4.19	7.33	3	6
I	0.97	2.12	0.25	80	4	8.4	250	2.0%	4.9	0.8	9.2	4.18	7.32	4	16
J	0.65	0.85	0.25	90	6	8.1	850	2.0%	4.9	2.9	10.9	3.94	6.81	3	6
K	0.69	1.37	0.25	100	18	6.1	80	1.0%	3.5	0.4	6.5	4.67	8.33	3	11
L1	1.71	2.24	0.25	100	2	12.6	860	1.4%	4.1	3.5	16.1	3.36	5.69	6	13
L2	0.90	1.18	0.25	55	1.1	9.4	860	1.4%	4.1	3.5	12.8	3.70	6.34	3	7
M1	0.44	0.58	0.25	70	1.5	10.3	200	2.0%	4.9	0.7	11.0	3.92	6.79	2	4
M2	0.16	0.21	0.25	65	3	7.7	0	0.0%	0.0	0.0	7.7	4.43	7.83	1	2
N	0.10	0.13	0.25								5.0	5.00	9.06	1	1
O1	1.27	1.66	0.25	100	2.5	11.7	460	1.5%	4.3	1.8	13.5	3.62	6.19	5	10
O2	0.32	0.42	0.25	100	2	12.6	850	2.0%	4.9	2.9	15.5	3.42	5.80	1	2
O3	0.20	0.27	0.25								5.0	5.00	9.06	1	2
O4	0.17	0.23	0.25								5.0	5.00	9.06	1	2
P	0.06	0.25	0.25								5.0	5.00	9.06	0	2
Q1	0.66	0.87	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	3	6
Q2	0.43	0.56	0.25	55	1.3	8.9	445	2.0%	5.0	1.5	10.4	4.01	6.97	2	4
R	0.46	0.60	0.25	100	4	10.1	700	2.0%	4.9	2.4	12.4	3.75	6.44	2	4
S1	0.70	0.91	0.25	100	6	8.8	175	2.0%	4.9	0.6	9.4	4.16	7.26	3	7
S2	0.06	0.08	0.25								5.0	5.00	9.06	0	1
T1	0.64	0.84	0.25	55	1.1	9.4	390	2.0%	4.9	1.3	10.7	3.97	6.88	3	6
T2	0.55	0.73	0.25	100	2	12.6	245	2.0%	5.0	0.8	13.5	3.63	6.20	2	5
U1	1.97	2.58	0.25	100	2	12.6	520	2.3%	5.3	1.6	14.3	3.54	6.03	7	16
U2	0.85	1.11	0.25	100	2	12.6	385	2.3%	5.4	1.2	13.8	3.59	6.12	3	7
V	0.24	0.32	0.25								5.0	5.00	9.06	1	3
W	2.34	3.07	0.25	100	2	12.6	630	1.6%	4.4	2.4	15.0	3.47	5.89	8	18
X	0.19	0.25	0.25								5.0	5.00	9.06	1	2
Y	0.16	0.21	0.25								5.0	5.00	9.06	1	2
OS-1*	**3.70**	**14.79**	**0.25**	**100**	**2**	**12.6**	**2700**	**2.3%**	**5.3**	**8.5**	**21.1**	**2.97**	**4.94**	**11**	**73**
OS-2*	**1.08**	**4.33**	**0.25**	**100**	**2**	**12.6**	**1203**	**1.0%**	**3.5**	**5.7**	**18.4**	**3.17**	**5.32**	**3**	**23**
OS-4	0.98	3.92	0.25	800	26	30.5					30.5	2.46	4.01	2	16
OS-5	0.51	2.03	0.25	80	5	7.8					7.8	4.42	7.82	2	16
OS-6	0.48	0.63	0.25	30	0.6	6.9	900	1.8%	4.7	3.2	10.1	4.05	7.04	2	4
OS-7*	0.25	1.01	0.25								5.0	5.00	9.06	1	9
OS-8	FLOW TAKEN FROM MERIDIAN RANCH MDDP													5	11
OS-9	FLOW TAKEN FROM MERIDIAN RANCH MDDP													8	19
OS-Q*	**0.03**	**0.12**	**0.25**	**100**	**2**	**12.6**	**155**	**1.5%**	**4.3**	**0.5**	**13.2**	**3.66**	**6.27**	**0**	**1**
OS-Q2*	**0.02**	**0.08**	**0.25**	**50**	**1**	**8.9**	**135**	**1.5%**	**4.3**	**0.5**	**9.5**	**4.14**	**7.24**	**0**	**1**
OS-R*	**0.09**	**0.38**	**0.25**	**100**	**2**	**12.6**	**50**	**2.7%**	**5.8**	**0.1**	**12.8**	**3.70**	**6.35**	**0**	**2**
OS-S1*	**0.03**	**0.11**	**0.25**								**5.0**	**5.00**	**9.06**	**0**	**1**
OS-S2*	**0.01**	**0.05**	**0.25**								**5.0**	**5.00**	**9.06**	**0**	**0**
OS-T2*	**0.03**	**0.11**	**0.25**								**5.0**	**5.00**	**9.06**	**0**	**1**

BASIN* = BASIN AREA REVISED FROM MDDP IN PRELIMINARY CONDITION DUE TO UNDEVELOPED UPSTREAM

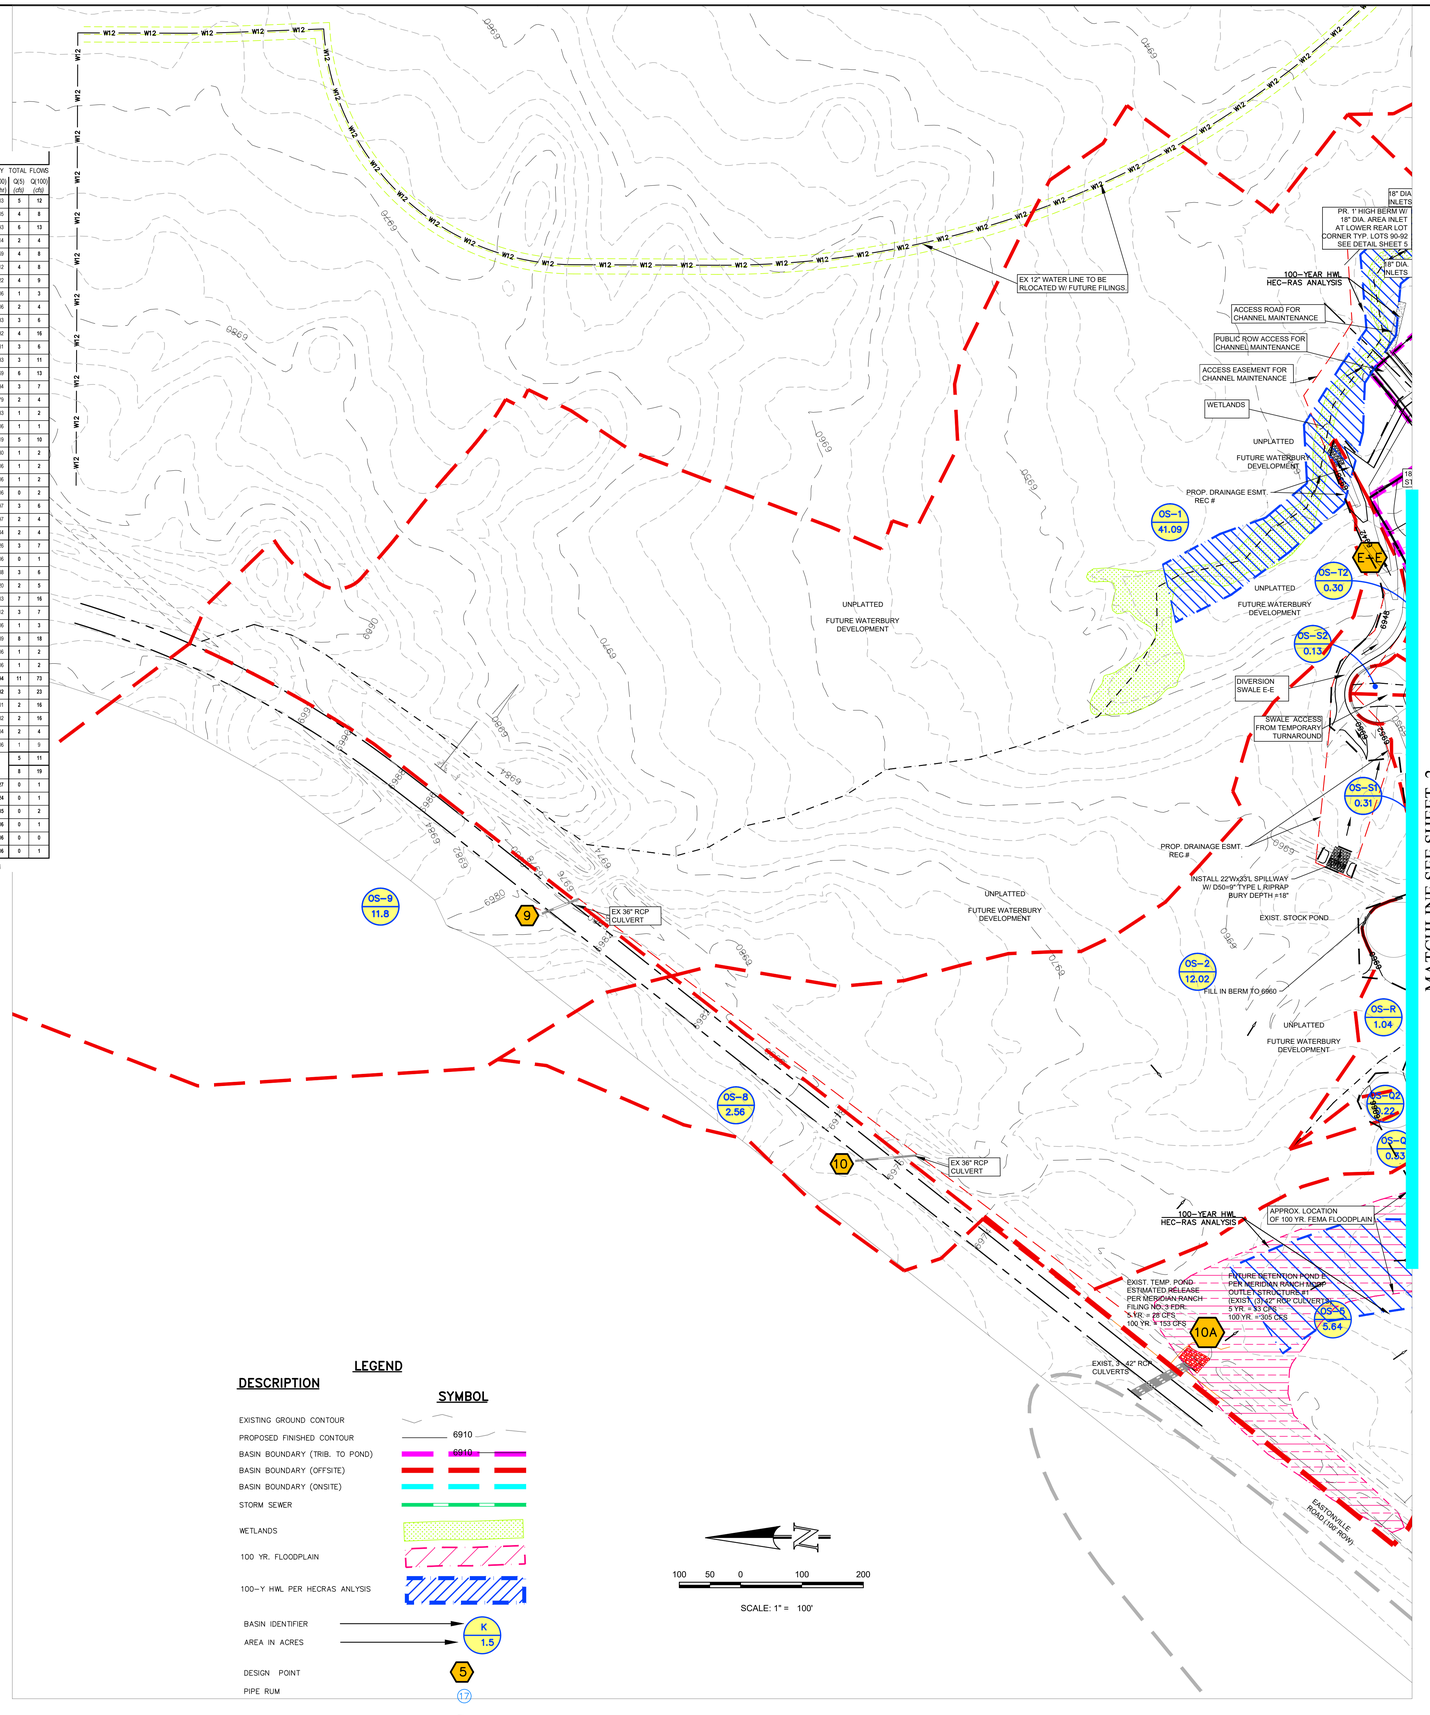

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (TRIB. TO POND)	6910
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
STORM SEWER	
WETLANDS	
100 YR. FLOODPLAIN	
100-Y HWL PER HECRAS ANLYSIS	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
PIPE RUM	(17)
EXISTING DIRECTION OF FLOW	
Tc PATH	

100 50 0 100 200

SCALE: 1" = 100'

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY ALL APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR REVIEW PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURE
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-471-3150

Terra Nova Engineering, Inc.
Traffic Civil Engineering Surveying
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnainc.com

WATERBURY FILING NO. 1

PRELIMINARY
PROPOSED FINAL DRAINAGE MAP
OFF-SITE

DESIGNED BY QNA
DRAWN BY QNA
CHECKED BY
H-SCALE 1"=100
V-SCALE NA
JOB NO. 1715.00
DATE ISSUED 11/22/22
SHEET NO. 1 OF 2

MATCHLINE SEE SHEET 1

MATCHLINE SEE SHEET 3

RUNOFF REDUCTION LEGEND

UNCONNECTED IMPERVIOUS AREA

RECEIVING PERVIOUS AREA

EXCLUDED UNDEVELOPED PERVIOUS AREA PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 – SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY (TRIB. TO POND)	
BASIN BOUNDARY (OFFSITE)	
BASIN BOUNDARY (ONSITE)	
STORM SEWER	
WETLANDS	
100 YR. FLOODPLAIN	
100-Y HWL PER HECRAS ANLYSIS	
BASIN IDENTIFIER	K
AREA IN ACRES	1.5
DESIGN POINT	5
PIPE RUM	17
EXISTING DIRECTION OF FLOW	
Tc PATH	

SCALE: 1"= 100'

PDR PBMP SUMMARY TABLE

BASINS	PBMP TRIB. AREA (AC)	PBMP
A, B1, B2, C, D, E, F, G1, G2, H, & K	22.34	FSD POND 1
L1, L2, O1, O2, O3 O4, & OS-4	20.23	FSD POND 2
Q1, OS-Q1, Q2, OS-Q2, R, OS-R, S1, OS-S1, S2, OS-S2, T1, T2, OS-T2, U1, U2, V, X, W, & OS-7	24.41	FSD POND 3
I, J, M1, P, & Y	8.45	EXCLUDED*
M2 & N	0.58	RUNOFF REDUCTION**

*EXCLUDED UNDEVELOPED PERVIOUS AREA PER THE EXCLUSION IN ECM APPENDIX I.7.1.B.7 - SITES WITH LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED

**UD-BMP VERSION 3.07 RUNOFF REDUCTION WAS USED TO SHOW THAT THIS AREA HAS 100% WQCV REDUCTION BASED UPON THE UNCONNECTED IMPERVIOUS AREA BEING ROUTED OVER THE RECEIVING PERVIOUS AREA.

REVISIONS

NO.	DESCRIPTION	DATE

UNTIL SUCH TIME AS THESE DRAWINGS ARE APPROVED BY THE APPROPRIATE REVIEWING AGENCIES, TERRA NOVA ENGINEERING AND SURVEYING, INC. APPROVES THEIR USE ONLY FOR REVIEW PURPOSES AS DESIGNATED BY WRITTEN AUTHORIZATION.

PREPARED FOR:
4-WAY RANCH JOINT VENTURE
ATTN: PETER MARTZ
PO BOX 50223
COLORADO SPRINGS, CO 80949
719-477-3150

Terra Nova Engineering, Inc.
721 S. 23RD STREET
COLORADO SPRINGS, CO 80904
OFFICE: 719-635-6422
FAX: 719-635-6426
www.tnsinc.com

WATERBURY FILING NO. 1

PRELIMINARY
PROPOSED DRAINAGE MAP
ON-SITE

DESIGNED BY QNA
DRAWN BY QNA
CHECKED BY
H-SCALE 1"=100
V-SCALE NA
JOB NO. 1715.00
DATE ISSUED 11/22/22
SHEET NO. 2 OF 2

FINAL DRAINAGE REPORT ~ BASIN RUNOFF SUMMARY

BASIN	WEIGHTED CA(5)	WEIGHTED CA(100)	OVERLAND C(5)	OVERLAND Length (ft)	OVERLAND Height (ft)	OVERLAND Tc (min)	STREET / CHANNEL FLOW Length (ft)	STREET / CHANNEL FLOW Slope (%)	STREET / CHANNEL FLOW Velocity (fps)	STREET / CHANNEL FLOW Tc (min)	Tc TOTAL (min)	INTENSITY I(2) (in/hr)	INTENSITY I(5) (in/hr)	INTENSITY I(100) (in/hr)	TOTAL FLOWS Q(2) (cfs)	TOTAL FLOWS Q(5) (cfs)	TOTAL FLOWS Q(100) (cfs)
A	1.60	1.88	0.25	100	2	12.6	420	1.5%	4.3	1.6	14.3	2.57	3.54	6.29	4	6	12
B1	1.25	1.47	0.25	100	2	12.6	400	1.5%	4.3	1.6	14.2	2.58	3.55	6.31	3	4	9
B2	1.14	1.34	0.25	100	2	12.6	550	1.5%	4.3	2.1	14.8	2.53	3.49	6.20	3	4	8
C	0.33	0.35	0.25	20	0.5	5.3	500	2.0%	4.9	1.7	6.9	3.38	4.65	8.27	1	2	3
D	0.84	0.98	0.25	80	2	10.5	300	2.5%	5.5	0.9	11.4	2.83	3.90	6.92	2	3	7
E	0.40	0.43	0.25	20	0.5	5.3	400	2.5%	5.5	1.2	6.5	3.46	4.75	8.46	1	2	4
F	0.96	1.12	0.25	80	2	10.5	620	1.5%	4.3	2.4	12.9	2.69	3.70	6.58	3	4	7
G	0.90	1.05	0.25	50	2	7.1	530	2.0%	4.9	1.8	8.9	3.11	4.28	7.61	3	4	8
H	0.57	0.67	0.25	50	2	7.1	525	1.5%	4.3	2.0	9.2	3.08	4.24	7.54	2	2	5
I	0.85	1.09	0.25	80	4	9.4	250	2.0%	4.9	0.8	9.2	3.07	4.23	7.52	3	4	8
J	0.90	1.15	0.25	90	6	8.1	850	2.0%	4.9	2.9	10.9	2.88	3.96	7.05	3	4	8
K	0.55	0.70	0.25	100	18	6.1	80	1.0%	3.5	0.4	6.5	3.45	4.75	8.44	2	3	6
L	0.10	0.14	0.25								5.0	3.71	5.10	9.07	0.4	0.5	1.3
M	0.22	0.26	0.25								5.0	3.71	5.10	9.07	0.8	1.1	2.4
N	0.17	0.19	0.25								5.0	3.71	5.10	9.07	0.6	0.8	1.7
O	0.55	0.62	0.25	80	6	7.3	200	3.0%	6.1	0.5	7.9	3.25	4.47	7.95	2	2	5
P	0.40	0.47	0.25	100	6	8.8					8.8	3.12	4.30	7.64	1	2	4
OS-1	0.63	0.74	0.25	50	1	8.9	300	2.0%	4.9	1.0	10.0	2.99	4.11	7.31	2	3	5
OS-2	0.23	0.27	0.25								5.0	3.71	5.10	9.07	1	1	2
OS-3	0.66	0.77	0.25	80	5	7.8					7.8	3.26	4.49	7.98	2	3	6
OS-4	0.34	0.40	0.25	100	4	10.1					10.1	2.97	4.09	7.26	1	1	3
OS-5	4.53	5.89	0.25	80	5	7.8	1000	2.5%	5.5	3.0	10.8	2.90	3.98	7.08	13	18	42
OS-6	0.69	0.76	0.25	30	0.6	6.9	900	1.8%	4.7	3.2	10.1	2.97	4.08	7.26	2	3	6

FINAL DRAINAGE REPORT ~ SURFACE ROUTING SUMMARY

Design Point(s)	Contributing Basins	Equivalent CA(5)	Equivalent CA(100)	Maximum Tc	Intensity I(5)	Intensity I(100)	Flow Q(5)	Flow Q(100)	Facility Size
1	A, OS-1	2.22	2.61	14.3	3.54	6.29	8	16	6' Type R Sump Inlet
2	C, OS-2	0.56	0.62	6.9	4.65	8.27	3	5	4' Type R Sump Inlet
3	B1	1.25	1.47	14.2	3.55	6.31	4	9	4' Type R Sump Inlet
4	B2	1.14	1.34	14.8	3.49	6.20	4	8	4' Type R Sump Inlet
5	F, H	1.53	1.79	12.9	3.70	6.58	6	12	6' Type R Sump Inlet
6	G	0.90	1.05	8.9	4.28	7.61	4	8	4' Type R Sump Inlet
7	Pond Pipe Inflow (DP-1 thru DP-6)	7.60	8.89	17.8	3.20	5.68	24	50	
	Total Pond A Inflow (incl. Basin K)	8.15	9.59	17.8	3.20	5.68	26	54	1.44 ac-ft. Pond
8	D	0.84	0.98	11.4	3.90	6.92	3	7	6' Type R Sump Inlet
9	E, OS-3	1.06	1.20	7.8	4.49	7.98	5	10	8' Type R Sump Inlet
10	Total Inflow to Temp. Pond	1.90	2.18	11.9	3.83	6.80	7	15	Temp. Sediment Basin
11	Future Pond E Release (185 cfs) OS-5, I	SCS Model					53	212	Dual 42" RCP Culverts
12	OS-6	0.69	0.76	10.1	4.08	7.26	3	6	18" RCP Culvert
13	Total Off-site Exist. Stock Pond Inflow	SCS Model					69	396	Exist. Stock Pond
13	Historic Flow at Exist. Stock Pond	From 4-Way Ranch Phase 1 MDDP					76	437	Exist. Stock Pond

LEGEND

DESCRIPTION	SYMBOL
EXISTING GROUND CONTOUR	6910
PROPOSED FINISHED CONTOUR	6910
BASIN BOUNDARY	
STORM SEWER	
100 YR. FLOODPLAIN	
BASIN IDENTIFIER / AREA IN ACRES	K / 1.5
DESIGN POINT	5
EXISTING DIRECTION OF FLOW	

SCALE: 1" = 100'

CLASSIC CONSULTING ENGINEERS & SURVEYORS	WATERBURY FILING NO. 1 FINAL DRAINAGE REPORT DEVELOPED DRAINAGE MAP		
619 N. Cascade Avenue, Suite 200 Colorado Springs, Colorado 80903 (719)785-0790 (719)785-0799 (Fax)	DESIGNED BY MAW	SCALE	DATE 7-6-16
	DRAWN BY MAW	(H) 1"= 100	SHEET 1 OF 1
	CHECKED BY	(V) 1"= N/A	JOB NO. 2359.10

N:\2359\10\REPORTS\2359\10FDM.dwg, 9/15/2016 7:47:27 AM, DWG To PDF.pc3