STORMWATER MANAGEMENT PLAN (SWMP) STORMWATER BEST MANAGEMENT PRACTICES

For:

Copper Chase at Sterling Ranch Grading & Erosion Control Plan

Located at:

~ East of Vollmer Road, North of Marksheffel Road and Sterling Ranch Road Intersection, El Paso County

Prepared For:

Developer: Challenger Homes, 8605 Explorer Drive, Suite 250, Colorado

Springs, 80920, Contact: Jim Byers, 719-602-7428

Contractor: TBD

Name:

Company:

Address:

Stormwater Manger: TBD

Name:

Company:

Address:

Prepared For:

Challenger Homes

8605 Explorer Drive, Suite 250 Colorado Springs, CO 80920

Contact: Jim Byers

719-602-7428

Prepared by:



CIVIL CONSULTANTS, INC.

212 Wahsatch Ave., Ste 305 Colorado Springs, CO 80903 (719) 955-5485

> Job. No. 09-014 EPC Project # PUDSP222



TABLE OF CONTENTS

Table of Contents	1
General Site Description	2
Existing Site Conditions	
Soils	2 2
Soil Erosion Potential	2
Phasing Plan	23
Water Quality	3
Narrative Description of BMP Control Measures	3
Timing Schedule	4
Areas of Disturbance	4
Permanent Stabilization	4
Owners Inspections and Maintenance of BMP's	5
Soils Borings / Test and Groundwater	5
Site Run-off Characteristics	5
Introduction	5
Floodplain Statement	6
Receiving Waters Descriptions	6
Existing Vegetation Description	6
Potential Pollution Sources	6
Anticipated Non-Stormwater Discharges	6
Proposed Sequence of Construction Activities	7
Structural Practices	7
Non-Structural Practices	7
Materials Handling and Spill Practices	8
Revising BMP's and SWMP	8
Selecting Post-Construction BMPs	9
Inspections	9
Record Keeping	9

APPENDICES

CDPHE Application Discussion Vicinity Map Grading. Erosion, Stormwater Inspection Checklist Spill Cleanup Instructions and Report Form BMP Construction Details Grading and Erosion Control Plans

STORMWATER MANAGEMENT PLAN (SWMP)

General Site Description

Copper Chase at Sterling Ranch is located within the Southeast quarter of Section 32 and within the Southwest quarter of Section 33, Township 12 south, Range 65 West and a portion of the Northeast quarter of Section 5, Township 13, Range 65 West, all west of the 6th Principal Meridian, in unincorporated El Paso County, Colorado. Sterling Ranch Filing No. 2 infrastructure encompasses the boundary of the site. The site is bound to the north by existing Vollmer Road, existing Alzada Drive, and existing Bynum Drive. The site is bound to the southwest by existing Marksheffel Road and to the southeast by existing Sterling Ranch Road. Copper Chase at Sterling Ranch lies within the Sand Creek Drainage Basin. Flows from this site are tributary to Sand Creek.

Copper Chase at Sterling Ranch consists of 19.65 acres and is presently undeveloped. Vegetation is sparse, consisting of native grasses. Existing site terrain generally slopes from north to southeast at grade rates that vary between 1.9% and 4.4%.

Copper Chase at Sterling Ranch is currently zoned RS-5000 for Residential Sub-Urban and is proposed to be PUD, or Planned Unit Development. Improvements proposed for the site include paved streets, utilities, and storm drainage improvements, as normally constructed for a planned unit development.

Existing Site Conditions

The Copper Chase at Sterling Ranch site consists of 19.65 acres and is situated in the Sand Creek watershed. Please refer to the Copper Chase at Sterling Ranch Final Drainage Report by M&S Civil Consultants for information on historic conditions and overlot drainage patterns.

Soils

Soils for this project are delineated by the map in the appendix as Blakeland Loamy Sand (8) and Columbine Gravelly Sandy Loam (19). Both are characterized as Hydrologic Soil Types "A". Soils in the study area are shown as mapped by S.C.S. in the "Soils Survey of El Paso County Area". Due to recent bulk grading activities, vegetation is sparse, consisting of native grasses and weeds.

Soil Erosion Potential

The proposed onsite construction activities anticipate the potential for soil erosion. Onsite stormwater BMP management facilities are proposed to minimize and aid in soil erosion. Group A soils have a moderate infiltration rate when thoroughly wet. These consist chiefly of moderate deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately course texture. These soils have a moderate rate of water transmission, and thus have a moderate potential for erosion. The impact on discharge for the soil erosion potential is moderate. The existing vegetation is sparse, consisting of prairie grasses and shrubs. A site visit was performed to confirm this description, as well as developing an estimated 60% ground

cover, during the summer season. A visual post construction comparison can be made from the adjacent undeveloped property to determine the percent of vegetation versus bare soil.

Phasing Plan

The Grading and Erosion Control Plan for Copper Chase at Sterling Ranch is not a phased project.

Water Quality

The existing permanent BMP facility used for water quality (Pond W-5) is owned and maintained by the Sterling Ranch Metropolitan District No. 1.

Narrative Description of BMP Control Measures

Installations of BMPs are staged in order to minimize the potential for pollutants in the stormwater discharge. A pre-construction meeting is necessary prior to commencement of BMP installation. The following stages will be used: establishment of perimeter controls, installation of temporary BMPs during soil disturbance, and then installation of permanent controls. Descriptions of some of the available BMPs are listed in below stages:

Only clearing necessary for the installation of perimeter controls should be employed in the first stage of temporary BMPs installation. Silt Fence, Vehicle Tracking, and Inlet Protection should be installed as shown on the Grading & Erosion Control Plan. At this time, the El Paso County inspector should be notified to schedule an initial inspection.

Once temporary sediment basins and infrastructure have been constructed, installation of temporary BMPs will commence. Temporary BMPs for this site consist of Straw Bale Barriers and Drainage Swales. Locations for temporary earthwork stockpiles will also be established. Once these locations have been established, they should be added and denoted on the copy of the plan that will be kept with the site administrator.

The final stage is the installation of permanent BMPs where no further disturbance is anticipated. Permanent BMP's consist of downstream FSD pond (Pond W-5) which was previously constructed with Sterling Ranch Filing No. 2 infrastructure. Therefore, once all grading activities are completed, all disturbed areas not sodded or developed will be mulched and reseeded with native seed mix and may be watered until vegetative cover has been fully re-instated. At this point, the person responsible for inspection and maintenance can begin to address requirements for final stabilization. See construction details for installation and maintenance.

Specifically, the proposed project will use vehicle tracking control pads, straw bale barriers, inlet protection, drainage swales, and mulching and reseeding to mitigate the potential for erosion across the site.

No ground water, springs, or irrigation of non-stormwater discharge covered by CDPHE low risk guidance are known for this project.

Areas for storage of building materials, soil stockpiles or wastes, and portable toilets are to be determined by the grading contractor and shown on the erosion control plan once determined. Construction vehicles (trucks) will access the site from Alzada Drive only. Portable toilets shall be located a minimum of 10 feet from

stormwater inlets and 50 feet from state waters. They shall be secured at all four corners to prevent overturning and cleaned on a weekly basis. They will be inspected daily for spills.

There are no dedicated asphalt or concrete batch plants associated with this project.

This project does not rely on control measures owned or operated by another entity. There are no offsite stormwater control measures proposed for use by the project that are not under the direct control of the owner or contractor.

<u>Removal of temporary control measures</u> can be completed once the downstream drainage systems are complete, upon completion of upstream development, and vegetative cover has been established. See Permanent Stabilization.

Timing Schedule

Anticipated Starting and Completion Time Period of Grading Activities: Initial Stage - SPRING 2022

Substantial Completion Stage – WINTER 2022

Expected Date on which the Final Stabilization Stage will be completed: - SPRING 2023

Removal of Temporary BMP's, (ex. Silt Fence, Inlet protection...) <u>Upon completion of all upstream development and 70% or more vegetation establishment of pre-</u> <u>disturbance levels</u>

Areas of Disturbance

Total subject property site acreage: **19.65 AC** Total disturbed area of subject property: **~20.30 AC**

Permanent Stabilization

Final stabilization is reached when all soil-disturbing activities at the site have been completed, and uniform vegetative cover has been established by drill seeding and crimping with a density of at least 70% of predisturbance levels or equivalent permanent physical erosion reduction methods have been employed. The CDPHE Water Quality Division may, after consultation with the permittee and upon good cause, amend the final stabilization criteria for specific operations. At this time, the El Paso County inspector should be notified to schedule a final inspection. The conditions of the SWMP and General Permit for Stormwater Discharges associated with Construction Activity will remain in effect until Final Stabilization is achieved and a notice of inactivation is sent by the applicant to CDPHE Stormwater Quality Division. All pertinent records must be kept on file for at least 3 years from the date the site is finally stabilized.

Owner Inspections and Maintenance of BMP's

1. Make thorough inspection of the stormwater management system at least every 14 days.

2. Make thorough inspection of the stormwater management system after each precipitation event that causes runoff.

3. If any deficiencies are noted, they must be corrected immediately after being noted.

4. Records of the signed site inspections or modifications must be kept at the site unless alternate place is approved by the El Paso County inspector and must be made available upon request.

5. Inspections must take place where construction activity is complete, but lot is not sold.

6. Monthly inspections must take place on site where construction activity is complete, but vegetative cover is still being established.

Soil Borings I Test and Groundwater

A Geotechnical Investigation has been completed for the Copper Chase at Sterling Ranch development, titled ______, El Paso County, Colorado, by ______, ____, 2021.

Site Runoff Characteristics

The site runoff coefficients are:	Minor Storm	Major Storm
-Historic existing Conditions	0.09	0.36
-Roofs, sidewalks, paved areas	0.90	0.96
-Landscaped and undeveloped areas	0.09	0.36
-1/8 acre or less residential lots	0.45	0.59

Introduction

To: Site Inspector responsible for all Colorado Department of Public Health and Environment and El Paso County Requirements:

The following stormwater management plan (SWMP) is a required item under the Construction Stormwater Discharge Permit. The primary goal for a SWMP to is to improve water quality by reducing pollutants in to stormwater discharges. Construction dewatering is a separate issue, and must be covered by the CDPHE Stormwater Quality Division's general permit for construction dewatering (regardless of the size of the construction project). Stormwater that mixes with ground water in an excavation is subject to the controls of a Construction Dewatering Permit. The SWMP will be completed and implemented at the time the project breaks ground, and will be revised if necessary as construction proceeds. This document must be kept at the construction site at all times and be made available to the public and any representative of any Water Quality Control Divisions if requested. Inspection guidance can be found at www.cdphe.state.co.us/and El Paso County and City of Colorado Springs Storm Drainage Design Criteria. The inspections should be made at least every 14 days and after any precipitation or snowmelt event that causes surface erosion. El Paso County requires that the inspector must be contacted 48 hours prior to initial and final inspections. An inspection log entry should be completed with each inspection performed. The inspection log should be kept with the SWMP. The conditions of the SWMP and General Permit for Stormwater Discharges associated with the construction activity will remain in effect until final stabilization is achieved, and a notice of inactivation is sent to CDPHE

Stormwater Quality Division. All pertinent records must be kept for at least 3 years from the date the site is stabilized or sold.

Floodplain Statement

According to the Federal Emergency Management Agency (FEMA) Flood Insurance Rate Map (FIRM) No. 08041C0535 G, dated December. 7th, 2018, none of the site lies within a designated flood plain. The Sand Creek Channel is located to the southeast of the site.

Receiving Water Description

The site is located on the east side of the Sand Creek Drainage Basin, and will reach Sand Creek via a storm system network previously constructed with Sterling Ranch Filing No. 2 infrastructure. No stream crossings are proposed for this project.

Existing Vegetation Description

Copper Chase at Sterling Ranch consists of 19.65 acres and is presently undeveloped. Vegetation is sparse, consisting of native grasses and shrubs. Existing site terrain generally slopes from north to southeast at grade rates that vary between 1.9% and 4.4%. Land use for Copper Chase at Sterling Ranch is currently listed as vacant land. The existing vegetation should be visually inspected prior to disturbance and cataloged to compare with post construction vegetation. Visual inspection is an acceptable method for comparison and determination of ground cover percentage. Adjacent undisturbed land can also be used to compare the post-construction to the pre-disturbed condition.

Potential Pollution Sources

Construction activities that will take place at this site may have an impact on the stormwater quality. These include, <u>but are not limited to</u>, portable toilets, materials storage, vehicle fueling, maintenance and vehicle tracking, dust, waste piles, significant dust generating processes, routine maintenance activities involving fertilizers, pesticides, herbicides, detergents, fuels, solvents, oils, loading and unloading areas, dumpsters, etc... The location of any of these activities not included on the initial site map should be added, along with a description of the measures used to prevent the discharge of these materials from the site. See construction details for installation and maintenance. All trash and debris should be removed from the site on a regular basis and disposed of properly.

Anticipated Non-Stormwater Discharges

Non-stormwater discharges are caused by activities other than direct runoff from precipitation events. These include, but are not limited to natural springs, irrigation. Any non-stormwater discharges that are not included in the initial map should be added along with a description of measures used to handle it. <u>There are no known</u> natural springs, temporary or permanent irrigation that would cause erosion on this project site.

Proposed Sequence of Construction Activities

- 1. Notify the inspector for initial inspection.
- 2. Clearing for necessary for perimeter controls.
- 3. Construct vehicle traffic control pad at entrance/exit of construction site.

4. Install lot perimeter controls, including silt fence, delineating project site as indicated on Site Map.

5. Complete remaining clearing and grubbing for project area. Install additional BMPs, as indicated on Site Map.

- 6. Final grade site as indicated on Site Map.
- 7. Achieve Final Stabilization, as outlined in SWMP. Send inactivation notice to CDPHE.
- 8. See Construction Details for BMP Installation and Maintenance.

Any stockpile areas are to be contained with silt fence, or other acceptable measures to prevent erosion and sediment from leaving the area. All BMP's that may be in place need to be inspected and cleaned if sediment should leave the site and enter the streets. Erosion control measures shall be implemented in a manner that will protect properties and public facilities from the adverse effect of erosion and sedimentation as a result of construction and earthwork activities. The following practices are to be implemented for this site:

Structural Practices

In areas of sheet flow running off-site and at the top and bottom of steep slopes, sediment berms can be used to trap sediment. Sediment berms should be placed on the contour and in areas where the tributary area is less than one-quarter acre per 100' of sediment berm. Straw bales will be used in swales to eliminate suspended particles and reduce sediment from leaving the site during construction. A vehicle traffic control pad will be installed at the entrance/exit of the site to reduce sediment tracking off-site. Practices may include, but are not limited to: straw bales, wattles/sediment control logs, silt fences, earth dikes, drainage swales, sediment traps, subsurface drains, pipe slope drains, and temporary or permanent sediment basins. All roads will be inspected to ensure that sediment from on-site construction activity is not being discharged with the stormwater. Sediment and debris that have been tracked off site should be removed daily by shoveling or sweeping. See construction details for installation and maintenance of proposed control measures.

Non-Structural Practices

Surface roughening may be used to reduce the amount of runoff and wind erosion from any given areas. Once the existing vegetation is cleared, watering should occur to help control fugitive dust. Disturbed areas where work is temporarily halted shall be temporarily stabilized within 21 calendar days after activity has ceased unless work is to be resumed within 30 calendar days after the activity has ceased. Other Non-Structural Practices may include soils erosion control measures for all slopes, channels, ditches, or any disturbed land area and shall be completed within 21 calendar days after final grading, or final earth disturbance, has been completed. Disturbed areas and stockpiles, which are not at final grade but will remain dormant for longer than 30 days, shall also be mulched within 21 days after interim grading. An area that is going to remain in an interim state for more than 60 days shall also be seeded. All temporary soil erosion control measures and BMPs shall be maintained until permanent soil erosion control measures are implemented. See construction details for installation and maintenance.

Materials Handling and Spill Practices

Any substances with potential to contaminate either the ground or ground surface water shall be cleaned up immediately after discovery or contained until appropriate cleanup methods can be employed. Manufacture's recommended methods for clean-up shall be followed, along with proper disposal methods. Any discharge of hazardous materials must be handled in accordance with the Divisions Notification Requirement. All waste and debris created by construction activities at the site or removed from the site shall be disposed of in compliance with all laws, regulations and ordinances of the federal, state and local agencies. See construction details for Materials Handling and Spills.

Revising BMP's and SWMP

1. The plans must be amended, by the contractor whenever there is a change in design, construction operation or maintenance that could have a significant effect on the potential for the discharge of pollutants to State Waters. It also must be amended if it is found to be ineffective in controlling pollutants present in stormwater.

2. Permittees are required to amend, adapt, and adjust their SWMP to accurately reflect phased construction changes and current conditions at the site. Plan modifications are broken into major and minor modifications which have differing requirements.

<u>Major Modifications</u>: Major modifications are changes to the SWMP that remove or add area to the project, modify the final hydrology or drainage of the final design, replace approved SWMP, or otherwise expand or contract the scope of the approved project. A revised SWMP and any revised supporting documents require review and approval of the local agency.

<u>Minor Modifications</u>: Minor modifications are changes to the SWMP that do not increase the scope or change hydrology of the project but; modify or improve specific BMPs in use at the site, indicate progression in phasing of the project, or specify relocation of previously approved BMPs within the project. Minor modifications can be made in the field by the permittee if the permittee can demonstrate that the modified soil erosion controls are equivalent to, or better than, the originally approved BMPs. Minor modifications must be thoroughly documented in the permittee's SWMP narrative, drawings and specifications.

3. The SWMP should be viewed as a "living document" throughout the lifetime of the project.

4. The plan must be signed in accordance with the general permit.

5. The plan must be made available, upon request, to CDPHE, United States Environmental Protection Agency, or operator of the local municipal storm sewer system, if applicable.

6. The following documents must be kept in a field office, trailer, shed, or vehicle that is onsite during normal working hours;

1. The permit coverage letter from the Colorado Department of Public Health and Environment (CDPHE)

2. The Stormwater Management Plan

- 3. Site Inspection Records
- 4. A copy of the Colorado General Permit for Stormwater Discharges from Construction Activities.

Selecting Post-Construction BMPs

Post Construction BMPs; Existing Full Spectrum Detention Pond (Pond W-5) and revegetation including seeding and mulching be the final BMP's. Permanent stabilization will be achieved with 70% vegetative establishment.

Inspections

Inspections should occur at least every 14 days and within 24 hours of a rainfall event producing runoff, usually this occurs with precipitation of 1/4 inch of rain or more. The local news weather report gives general rainfall amounts each day.

The inspection schedule should be routinely accomplished every 14 days and within 24 hours of the end of a storm event for the entire site with all BMP's evaluated for performance and need. Any BMP found to be ineffective should be re-accomplished or replaced with a new BMP to provide the level of protection needed. BMP's found to be no longer needed can be removed. Inspections should also be accomplished as soon as practical, at the end of a rain event causing surface erosion. The general procedure for correcting problems when identified should be documented in a log and a solution to correct the problem as soon as possible. The QSM will be sufficiently qualified for the required duties per the ECM Appendix I.5.2.A.

Record Keeping


Records should be retained for a minimum period of at least 3 years after the permit is terminated. <u>Sign and</u> <u>date</u> the inspection log sheets provided in the Appendix of this report. The inspection logs and location of SWMP records should be kept onsite.

APPENDICES

CDPHE APPLICATION DISCUSSION

The <u>Stormwater Discharge Associated with Construction Activities</u> Application must be obtained and submitted by the owner, contractor, individual, or entity that is deemed as the Permit Operator for Crossroads Mixed Use at the time of construction.

VICINITY MAP

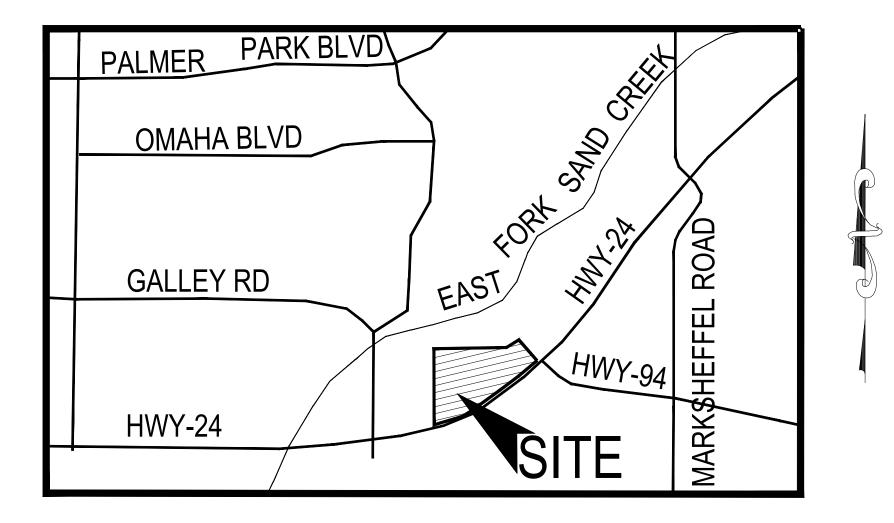

VICINITY MAP N.T.S.

GRADING, EROSION, STORMWATER INSPECTION CHECKLIST

Appendix C Inspection Checklist – Grading Erosion, and Stormwater Quality Controls

CITY OF COLORADO SPRINGS

DATE/TIME:

INSPECTOR:

TYPE OF INSPECTION: Self-Monitoring____

Initial _____ Compliance _____ Follow-Up_

Reconnaissance____ Complaint____ Final_

SITE:	DATE OF PERMIT:	
ADDRESS:		
CONTRACTOR:	OWNER/OWNER'S REPRESENTATIVE:	
CONTACT:	CONTACT:	
PHONE:	PHONE:	
STAGE OF CONSTRUCTION: Initial BMP Installation/Prior to Construction Clearing & Grubbing		
Rough Grading Finish Grading Utility Construction Building Construction		
Final Stabilization		

OVERALL SITE INSPECTION	YES/NO/N.A.	REMARKS/ACTIONS
Is there any evidence of sediment leaving the construction site? If so, note areas.		
Have any adverse impacts such as flooding, structural damage, erosion, spillage, or accumulation of sediment, debris or litter occurred on or within public or private property, wetlands or surface waters -to include intermittent drainageways and the City's stormwater system (storm sewers, gutters, ditches, etc.)?		
Are the BMPs properly installed and maintained?		
Have the BMPs been placed as shown on approved plans?		
Are the BMPs functioning as intended?		
Is work being done according to approved plans and any phased construction schedule?		
Is the construction schedule on track?		
Are drainage channels and outlets adequately stabilized?		
Is there any evidence of discharges or spills of fuels, lubricants, chemicals, etc.?		

BMP MAINTENANCE CHECKLIST	YES/NO/N.A.	REMARKS/ACTIONS NECESSARY
SURFACE ROUGHENING		
Is the roughening consistent/uniform on slopes??		
Any evidence of erosion?		
TEMPORARY SEEDING		
Are the seedbeds protected by mulch?		
Has any erosion occurred in the seeded area?		
Any evidence of vehicle tracking on seeded areas?		
TEMPORARY SWALES		
Has any sediment or debris been deposited within the swales?		
Have the slopes of the swale eroded or has damage occurred to the lining?		
Are the swales properly located?		
VEHICLE TRACKING		
Is gravel surface clogged with mud or sediment?		
Is the gravel surface sinking into the ground?		
Has sediment been tracked onto any roads and has it been cleaned up?		
Is inlet protection placed around curb inlets near construction entrance?		
OTHER		

FINAL INSPECTION CHECKLIST	YES/NO/N.A.	REMARKS/ACTIONS NECESSARY
Has all grading been completed in compliance with the approved Plan, and all stabilization completed, including vegetation, retaining walls or other approved measures?		
Has final stabilization been achieved – uniform vegetative cover with a density of at least 70 percent of pre-disturbance levels, and cover capable of adequately controlling soil erosion; or permanent, physical erosion methods?		
Have all temporary measures been removed?		
Have all stockpiles, construction materials and construction equipment been removed?		
Are all paved surfaces clean (on-site and off-site)?		
Has sediment and debris been removed from drainage facilities (on-site and off-site) and other off-site property, including proper restoration of any damaged property?		
Have all permanent stormwater quality BMPs been installed and completed?		

ADDITIONAL COMMENTS:

The items noted as needing action must be remedied no later than _______ The contractor shall notify the inspector when all the items noted above have been addressed.

By signing this inspection form, the owner/owner's representative and the contractor acknowledge that they have received a copy of the inspection report and are aware it is their responsibility to take corrective actions by the date noted above. Failure to sign does not relieve the contractor and owner/owner's representative of their responsibility to take the necessary corrective action and of their liability for any damages that have occurred or may occur.

INSPECTOR'S SIGNATURE:	DATE:
OWNER/OWNER'S REPRESENTATIVE SIGNATURE:	DATE:
CONTRACTOR'S SIGNATURE:	DATE:

SPILL CLEANUP INSTRUCTIONS AND REPORT FORM

involving a radioactive or infectious material, or there is a release of a marine pollutant.

Spills and incidents that have or may result in a spill along a highway must be reported to the nearest law enforcement agency immediately. The Colorado State Patrol and CDPHE must also be notified as soon as possible. In the event of a spill of hazardous waste at a transfer facility, the transporter must notify CDPHE within 24 hours if the spill exceeds 55 gallons or if there is a fire or explosion.

The National Response Center should be notified as soon as possible after discovery of a release of a hazardous liquid or carbon dioxide from a pipeline system if a person is killed or injured, there is a fire or explosion, there is property damage of \$50,000 or more, or any nearby water body is contaminated. The National Response Center and the Colorado Public Utilities Commission Gas Pipeline Safety Section must be notified as soon as possible, but not more than two hours after discovery of a release of gas from a natural gas pipeline or liquefied natural gas from a natural gas pipeline or liquefied natural gas facility if a person is killed or injured, there is an emergency shutdown of the facility, or there is property damage of \$50,000 or more. The Colorado Public Utilities Commission should also be notified if there is a gas leak from a pipeline, liquefied natural gas system, master meter system or a propane system that results in the evacuation of 50 or more people from an occupied building or the closure of a roadway.

Oil and Gas Exploration

All Class I major events on federal lands, including releases of hazardous substances in excess of the CERCLA reportable quantity and spills of more than 100 barrels of fluid and/or 500 MCF of gas released, must be reported to the Bureau of Land Management (BLM) immediately. Spills of oil, gas, salt water, toxic liquids and waste materials must also be reported to the BLM and the surface management agency. Spills of exploration and production (E&P) waste on state or private lands in excess of 20 barrels, and spills of any size that impact or threaten to impact waters of the state, an occupied structure, or public byway must be reported to the Colorado Oil and Gas Conservation Commission as soon as practicable, but not more than 24 hours after discovery. Spills of any

size that impact or threaten to impact waters of the state must be reported to CDPHE immediately. Spills that impact or threaten to impact a surface water intake must be reported to the emergency contact for that facility immediately after discovery. Spills of more than five (5) barrels of E&P waste must be reported in writing to the Oil and Gas Conservation Commission within 10 days of discovery.

REPORTING NUMBERS

National Response Center (24-hour) 1-800-424-8802 CDPHE Colorado Environmental Release and Incident Reporting Line (24-hour) 1-877-518-5608

Radiation Incident Reporting Line (24-hour) 303-877-9757

Colorado State Patrol (24-hour) 303-239-4501 Division of Oil and Public Safety (business hours) 303-318-8547 Oil and Gas Conservation Commission (business hours) 303-894-2100 Colorado Public Utilities Commission Gas Pipeline Safety Section (business hours) 303-894-2851

Local Emergency Planning Committees (to obtain list, business hours) 720-852-6603



Colorado Department of Public Health and Environment

Environmental

Spill Reporting

Colorado Department of Public Health and Environment 4300 Cherry Creek Drive South Denver, CO 80246-1530

http://www.cdphe.state.co.us

January 2009

When a release of a hazardous material or other substance occurs to the environment, there are a number of reporting and notification requirements that must be followed by the company or individual responsible for the release. Most spills are covered by more than one reporting requirement, and **all** requirements must be met. In addition to verbal notification, written reports are generally required. This brochure briefly explains the major requirements. A more detailed description is provided in the "Reporting Environmental Releases in Colorado" Guidance Document, available on the web. Releases that must be reported to the Colorado Department of Public Health and Environment (CDPHE) may be reported to the Colorado Environmental Release and Incident Reporting Line.

ENVIRONMENTAL SPILL REPORTING	hazardous substance, but not a CERCLA hazardous substance. and there is absolutely no potential to	Water Quality Control Act and Colorado Discharge Permits" at
CERCLA, EPCRA and RCRA	affect off-site persons, then only the State Emergency Planning Commission (represented by CDPHE for	http://www.cdphe.state.co.us/op/wqcc/Resources/Gui dance/spillguidance.pdf.
The Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) and the	reporting purposes) and the Local Ernergency Planning Committee need to be notified.	Clean Air Act
Emergency Planning and Community Right-to-Know Act (EPCRA) require that a release of a reportable quantity or more of a hazardous substance to the environment be reported immediately to the appropriate authorities when the release is	In the case of a release of hazardous waste stored in tanks, RCRA-permitted facilities and large quantity generators must also notify CDPHE within 24 hours of any release to the environment that is greater than	Hazardous air pollutants (HAPs) are designated as hazardous substances under CERCLA. If a facility has an air permit but the permit does not allow for or does not specify the release of a substance, or if the facility does not have an air permit, then all releases
discovered. Under CERCI & renortable rutantities were		in excess of the CERCLA / EPCRA reportable quantity for that substance must be reported to the
established for hazardous substances listed or designated under other environmental statutes. These include:	Each licensee or registrant must report to the Radiation Incident Reporting Line in the event of lost, stolen or missing licensed or registered radioactive	releases more of a substance than is allowed under releases more of a substance than is allowed under its air permit, the facility must also report the release. Discharges of a substance that are within the
 all hazardous air pollutants (HAPs) listed under Section 112(b) of the Clean Air Act. 	materials or radiation machines, releases of radioactive materials, contamination events, and fires or explosions involving radioactive materials.	allowable limits specified in the facility's permit do not need to be reported.
 all toxic pollutants designated under Section 307(a) or Section 311(b)(2)(A) of the Clean 	Releases of radionuclides are reportable under CERCLA.	Regulated Storage Tanks
Water Act. all Resource Conservation and Recovery Act	Clean Water Act	Owners and operators or regulated storage tank systems must report a release or suspected release
(RCRA) characteristic and listed hazardous	The Clean Water Act requires the person in charge of	of regulated substances to the Division of Oil and Public Safety at the Colorado Department of Labor
 any element, compound, or substance designated under Section 102 of CERCLA. 	a facility or vessel to immediately report to the National Response Center all discharges of oil or designated hazardous substances to water. Oil	and Employment within 24 hours. Under this program, the reportable quantity for petroleum releases is 25 gallons or more, or any amount that
EPCRA established a list of extremely hazardous substances (EHS) that could cause serious	means oil of any kind or form. Designated hazardous substances are included in the CERCLA list.	causes a sheen on nearby surface water. Spills of less than 25 gallons of petroleum must be
irreversible health effects from accidental releases. Many substances appear on both the CERCLA and EPCPA extremely hazardous	The Clean Water Act also requires that facilities with a National Pollutant Discharge Elimination System	immediately contained and cleaned up. If cleanup cannot be accomplished within 24 hours, the Division of Oil and Public Safety must be notified immediately.
substances that are also CERCLA hazardous substances have the same reportable quantity (RO)	(NPDES) permit report to the National Response Center within 24 hours of becoming aware of any	Spills of hazardous substances from tanks in excess
as under CERCLA. EPCRA extremely harding the compared of the c	unanticipated bypasses or upsets that cause an exceedance of the effluent limits in their permit and	of the CERCLA or EPCRA reportable quantity must be reported immediately to the National Response
reportable quantity that is equal to their threshold planning quantity (TPQ). A list of CERCLA reportable	any violations of their maximum daily discharge limits for pollutants listed in their permit.	Center, CDPHE and the local fire authority, and to the Division of Oil and Public Safety within 24 hours.
quantities is included in 40 CFR Section 302.4. A list of EPCRA threshold planning quantities is included in	A release of any chemical, oil, petroleum product,	Transportation and Pipelines
40 CFR Part 355 Appendices A & B.	sewage, etc., which may enter waters of the state of Colorado (which include surface water, ground water	The person in physical possession of a hazardous
CERCLA-reportable releases must be reported immediately to the National Response Center (NRC),	and dry gullies and storm sewers leading to surface water) must be reported immediately to CDPHE. Any	as soon as practical, but not to exceed 12 hours after the incident if as a direct result of the hazardous
while EPCRA-reportable releases must be reported	accidental discharge to the sanitary sewer system must he reported immediately to the local sewer	me mouerny in as a queck result of the nazaroous material, a person is killed or injured, there is an
Ritimediately to the Nationial Response Center, the State Emergency Response Commission (SERC) and the affected Local Emergency Planning Committee	authority and the affected wastewater treatment plant. For additional regarding releases to water, please see "Guidance for Renorting Spills under the Colorado	evacuation of the general public lasting more than an hour, a major transportation artery is shut down for an hour or more, the flight pattern of an aircraft is altered,
(LEPC). If the release is an EPCKA extremely		there is fire, spillage or suspected contamination

Colorado Water Quality Control Division

Policy No:	WQE-10
Initiated By:	Dave Akers
Approved By:	Sterry Har
Effective Date:	3/1/08
Revision No.:	
Revision Date:	
	Initiated By: Approved By: Effective Date: Revision No.:

Guidance for Reporting Spills under the Colorado Water Quality

Control Act and Colorado Discharge Permits

I. Purpose

To provide guidance on applicable Colorado reporting requirements pursuant to § 25-8-601(2), C.R.S., that pertains to spills or discharges that may cause pollution of State waters. This guidance does not relieve an entity of any other statutory or regulatory requirements applicable to a spill. Facilities possessing a Colorado Discharge Permit System (CDPS) permit should follow applicable permit terms and conditions regarding spill reporting and response. This guidance is not intended to supersede or modify such permit terms and conditions or the applicable statute and regulations. This guidance does not limit the existing rights or responsibilities of persons with respect to spill reporting. For example, persons retain the right and responsibility to determine in the first instance whether a particular spill is covered by an existing permit or may cause pollution to State waters (i.e., surface or ground waters).

II. Statutory Requirement Addressed

Colorado Water Quality Control Act - Spill Reporting Requirements - § 25-8-601(2), C.R.S.

"Any person engaged in any operation or activity which results in a spill or discharge of oil or other substance which may cause pollution of the waters of the state contrary to the provisions of this article as soon as he has knowledge thereof, shall notify the division of such discharge."

State waters means any and all surface and subsurface waters which are contained in or flow in or through this state, but does not include waters in sewage systems, waters in treatment works of disposal systems, waters in potable water distribution systems, and all water withdrawn for use until use and treatment have been completed (§ 25-8-103 (19), C.R.S.).

Examples of State waters include, but are not limited to, perennial streams, intermittent or ephemeral gulches and arroyos, ponds, lakes, reservoirs, irrigation canals or ditches, wetlands, stormwater conveyances (when they discharge to a surface water), and groundwater.

III. Policy/Applicability

The Division distinguishes between reporting requirements for spills that occur with respect to activities that result in a discharge that is authorized under a CDPS permit and those that are not. For non-permitted activities, or in the case of an activity where a permit does not address reporting of or response to a given spill, the Division recommends that the responsible person(s) take the following actions:

- 1. Immediately report spills that may result in a non-permitted discharge of pollutants to State waters to the Environmental Release and Incident Reporting Line at 1-877-518-5608;
- 2. Include the following information, if available, when notifying the Division of a spill:
 - a. The name of the responsible person and, if not reported by that person, the name of the person reporting the spill and the name of the responsible person if known;
 - b. An estimate of the date and time that the spill began or the actual date and time, if known;

- c. The location of the spill, its source (e.g., manhole, tanker truck), and identification of the type of material spilled (e.g., untreated wastewater, biosolids, specific chemical);
- d. The estimated volume of the spill and, if known, the actual date and time the spill was fully controlled/stopped.
- e. Whether the spill is ongoing and, if it is, the rate of flow and an estimate of the time that the spill will be fully controlled, if known;
- f. Measures that are being or have been taken to contain, reduce, and/or clean up the spill;
- g. A list of any potentially affected area and any known downstream water uses (e.g., public water supplies, irrigation diversions, public use areas such as parks or swim beaches) that will be or have been notified; and
- h. A phone number and e-mail to contact a representative of the responsible person that is in charge of the response. Where a non-responsible person is reporting the spill, they are encouraged, but not required, to provide contact information.

Reporting and management of spills that occur with respect to activities resulting in a discharge authorized under a permit should be performed in accordance with the specific requirements of that permit. If the permit does not provide specific reporting or management response requirements for a given spill that may pollute State waters, the Division recommends that the responsible person report the spill in accordance with the procedures listed above.

This guidance only addresses reporting requirements under the Division's authority. The person or entity engaged in any operation or activity that results in a spill is responsible for any other applicable reporting requirements associated with the spill to other regulatory agencies.

Section 25-8-601(2), C.R.S. only addresses spill reporting to the Division. Section 25-8-202(7), C.R.S. provides certain water quality responsibilities to other state "implementing agencies." The Division's position is that, where a spill to the ground that may impact ground water only is fully and timely reported to an implementing agency having jurisdiction over that spill, the intent of section 601(2) has been fulfilled, and the spill need not also be reported to the Division. The Division suggests that the responsible person confirm with the implementing agency that a spill falls under the jurisdiction of the implementing agency at the time it is reported in order to avoid possible legal liability should it fall under the Division.

IV. Division Examples of Non-Reportable Spills

The Division has identified the following examples of types of spills that are considered "non-reportable" under § 25-8-601(2), C.R.S. Documentation of such spills, including the information listed in section III.2.a – III.2.f above, should be maintained by the responsible person for Division review for a period of three years.

- 1. A spill to a generally impervious surface or structure (e.g., paved street/parking lot, storm sewer, warehouse floor, manhole, vault, concrete basement), or onto soils, that is fully contained in/on the impervious surface/structure or soils, or that is managed in a manner so that it will not reach State waters at the time of the spill or in the future. Such spills that are cleaned up within 24 hours will be considered by the Division to have no potential to reach State waters. However, even if such spills are not cleaned up within 24 hours, the responsible person may be able to "fully contain" or otherwise manage a spill such that it will not reach State waters. Where there is a sump pump present in a basement to which a spill occurred, the responsible person must establish that the pump did not discharge to State waters during the time between the start of the spill and the completion of clean-up in accordance with best management practices.
- A spill or discharge that is managed consistent with best management practices that are established in accordance with a CDPS discharge permit or any Water Quality Control Commission-adopted control regulation related to spill management or reporting.
- 3. A spill of potable water from a public water system that does not reach surface waters.

Colorado Department of Public Health and Environment Water Quality Control Division		Inc	Incident / Spill / SSO Release Reporting Five (5) Day Reporting Form		
Field Services - Grand Junction 222 South 6th Street, Room 232 Grand Junction, CO 81501 Telephone: 970-248-7150 Fax: 970-248-7198 Contact email: michelle.thiebaud@state.co.us		Field Services - Pueblo 140 Central Main, Suite 300 Pueblo, CO 81003 Telephone: 719-295-5060 Fax: 719-543-8441 Contact email: carol.keever@state.co.us	C		Field Services - Denver 4300 Cherry Creek Dr. South, B2 Denver, Colorado 80246-1530 Phone: 303-692-3650 Fax: 303-782-0390 Contact email: annemarie.goolsby@state.co.us

Reporting Form: Incident / Spill / Sanitary Sewer Overflow (SSO)

The Water Quality Control Division distinguishes between reporting requirements for spills that occur with respect to activities that result in a discharge that is authorized under a CDPS permit and those that are not. Reporting and management of spills that occur with respect to activities resulting in a discharge authorized under a permit should be performed in accordance with the specific requirements of that permit. If the permit does not require a 5-day report, please provide the information below in writing. For non-permitted activities, or in the case of an activity where a permit does not address reporting of or response to a given spill, please submit this written response to the Water Quality Control Division within five (5) working days of the date of the event. If sufficient space is not provided, please attach other sheets. Please send the completed form with signature via fax or email to the Division's Field Services office indicated above. If you have any questions please contact the Division's Field Services Engineer at your earliest convenience. The Field Services County list is available at: http://www.colorado.gov/cdphe/wqcd (Contacts, Inspection services contacts, then Field services contacts).

Prior to the five (5) working day deadline, you may request an extension to submit the report if sample analyses justifiably are going to require more time to analyze than the reporting time allows. To request an extension please send an email to the Division's Field Services Engineer for the County that the incident / spill / SSO took place or to the email listed above.

Incident Background Information	on				
County					
Incident / Spill Number (Division provided) and Spill Date					
Type of Incident / Spill / SSO (check one)	Sanitary Sewer Overflow/ WW Treatment Plant Byp (through an authorized ou Unplanned potable water	ass or Upset 🔲 WW Treatment Plant Spil			
Contact Information					
Potentially Responsible Party (PRP): Contact Name		Potentially Responsible Party (PRP): Company / Agency			
PRP Phone / Fax	Phone: Fax:	PRP email address			
CDPS Permit Number:		CDPS Permittee Name:			
Reported by (if not PRP): Contact Name		Reported by (if not PRP): Company / Agency			
Reported by (if not PRP): Phone / Fax	Phone: Reported by (if not PRP): Fax: email address				
Incident Information: Please pr	ovide the following information	•			
Incident / spill / SSO source, cause, and event description.					
Response:					
 Material released (e.g., untreated wastewater, biosolids, specific chemicals or products) and estimated total quantity (e.g., gallons). Please attach MSDS for any and all chemicals or products involved in spill or release. Response: 					
C Actual or estimated dates and times of the event, including duration and actual date and time spill was fully controlled/stopped. If release is still occurring, the date and time the release is expected to be stopped. Response:					
Revised April 2015	Incident Reporting Ho	tline 1-877-518-5608	Page 1 of 2		

	do Department of Public Heal Quality Control Division	th and Environment	Incident / Spill / SSO Release Reporting Five (5) Day Reporting Form
D	Location of release (e.g., addres	s, lat/long, road name and mile marke	·).
	Response:	,	,.
E		ned to contain, reduce, and clean up sp	pill or release.
	Response:		
F	Steps taken or planned to preven	nt reoccurrence of the event.	
	Response:		
Exam		fined in § 25-8-103(19), C.R.S.). nnial streams, intermittent or ephemer conveyances (when they discharge to s	al gulches, ditches, ponds, lakes, reservoirs, urface water), and groundwater.
G	Did flow or materials reach surfa State water body was impacted	ce waters of the State? If so, please de (e.g., spill impacted a storm drain whic	escribe the path of flow to State waters and which h was directly connected to Cherry Creek, Colorado e surface water and what was the resulting impact?
Н	Were any water quality samples Response:	or other samples taken? If so, please d	escribe sampling process and attached results.
1	State water body impacted (e.g,		cribe the path of flow to State waters and which ras not excavated). If yes, what quantity of material sulting impact?
J	Did the incident include any of t	he following (check if yes)? If so, pleas	e include additional details below.
	Toxic Chemical Release		
	Response:		
Incide	ent Impact to Areas or Water User	'S	
К	water users (e.g., public water s and potential impacts.		cluding parks or swim beaches) or downstream list impacted areas and/or users, their location,
	Response:		
L	How were the impacted area use downstream users contact via ph		water users notified (e.g., signs posted, list
	Response:		
Lboro	by certify that the information are	sented above is accurate and complete	
Dat		Typed Name and Title	Signature

BMP CONSTRUCTION DETAILS

Description

Vehicle tracking controls provide stabilized construction site access where vehicles exit the site onto paved public roads. An effective vehicle tracking control helps remove sediment (mud or dirt) from vehicles, reducing tracking onto the paved surface.

Appropriate Uses

Implement a stabilized construction entrance or vehicle tracking control where frequent heavy vehicle traffic exits the construction site onto a paved roadway. An effective vehicle tracking control is particularly important during the following conditions:



Photograph VTC-1. A vehicle tracking control pad constructed with properly sized rock reduces off-site sediment tracking.

- Wet weather periods when mud is easily tracked off site.
- During dry weather periods where dust is a concern.
- When poorly drained, clayey soils are present on site.

Although wheel washes are not required in designs of vehicle tracking controls, they may be needed at particularly muddy sites.

Design and Installation

Construct the vehicle tracking control on a level surface. Where feasible, grade the tracking control towards the construction site to reduce off-site runoff. Place signage, as needed, to direct construction vehicles to the designated exit through the vehicle tracking control. There are several different types of stabilized construction entrances including:

VTC-1. Aggregate Vehicle Tracking Control. This is a coarse-aggregate surfaced pad underlain by a geotextile. This is the most common vehicle tracking control, and when properly maintained can be effective at removing sediment from vehicle tires.

VTC-2. Vehicle Tracking Control with Construction Mat or Turf Reinforcement Mat. This type of control may be appropriate for site access at very small construction sites with low traffic volume over vegetated areas. Although this application does not typically remove sediment from vehicles, it helps protect existing vegetation and provides a stabilized entrance.

Vehicle Tracking Control	
Functions	
Erosion Control	Moderate
Sediment Control	Yes
Site/Material Management	Yes

VTC-3. Stabilized Construction Entrance/Exit with Wheel Wash. This is an aggregate pad, similar to VTC-1, but includes equipment for tire washing. The wheel wash equipment may be as simple as hand-held power washing equipment to more advance proprietary systems. When a wheel wash is provided, it is important to direct wash water to a sediment trap prior to discharge from the site.

Vehicle tracking controls are sometimes installed in combination with a sediment trap to treat runoff.

Maintenance and Removal

Inspect the area for degradation and replace aggregate or material used for a stabilized entrance/exit as needed. If the area becomes clogged and ponds water, remove and dispose of excess sediment or replace material with a fresh layer of aggregate as necessary.

With aggregate vehicle tracking controls, ensure rock and debris from this area do not enter the public right-of-way.

Remove sediment that is tracked onto the public right of way daily or more frequently as needed. Excess sediment in the roadway indicates that the stabilized construction entrance needs maintenance.

Ensure that drainage ditches at the entrance/exit area remain clear.




Photograph VTC-2. A vehicle tracking control pad with wheel wash facility. Photo courtesy of Tom Gore.


A stabilized entrance should be removed only when there is no longer the potential for vehicle tracking to occur. This is typically after the site has been stabilized.


When wheel wash equipment is used, be sure that the wash water is discharged to a sediment trap prior to discharge. Also inspect channels conveying the water from the wash area to the sediment trap and stabilize areas that may be eroding.

When a construction entrance/exit is removed, excess sediment from the aggregate should be removed and disposed of appropriately. The entrance should be promptly stabilized with a permanent surface following removal, typically by paving.

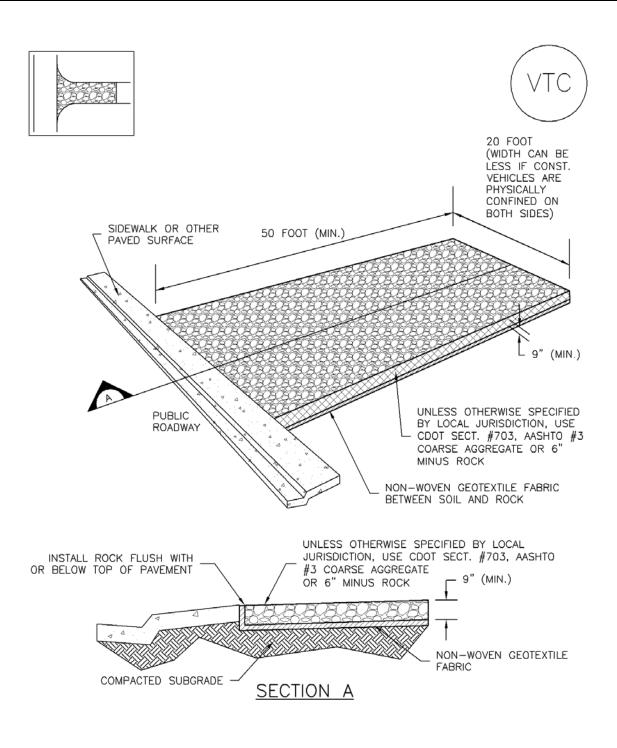


VTC-1. AGGREGATE VEHICLE TRACKING CONTROL

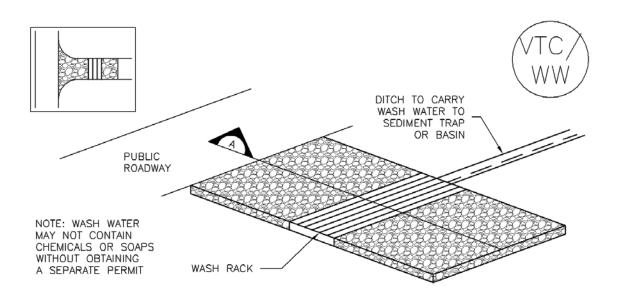

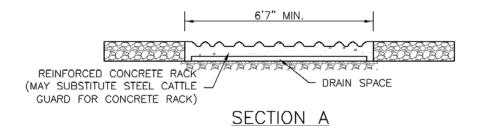

VTC-2. AGGREGATE VEHICLE TRACKING CONTROL WITH WASH RACK

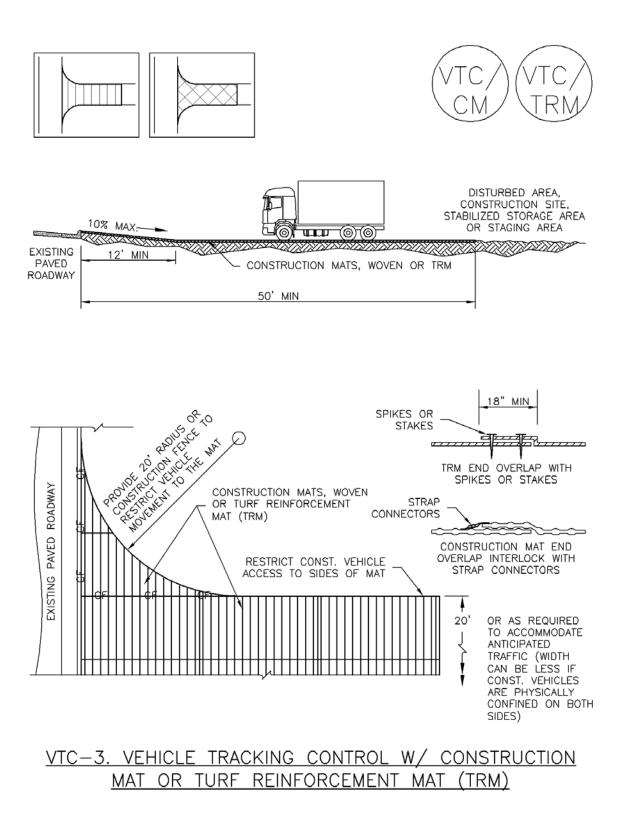

STABILIZED CONSTRUCTION ENTRANCE/EXIT INSTALLATION NOTES

1. SEE PLAN VIEW FOR

-LOCATION OF CONSTRUCTION ENTRANCE(S)/EXIT(S).

-TYPE OF CONSTRUCTION ENTRANCE(S)/EXITS(S) (WITH/WITHOUT WHEEL WASH, CONSTRUCTION MAT OR TRM).

2. CONSTRUCTION MAT OR TRM STABILIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE USED ON SHORT DURATION PROJECTS (TYPICALLY RANGING FROM A WEEK TO A MONTH) WHERE THERE WILL BE LIMITED VEHICULAR ACCESS.

3. A STABILIZED CONSTRUCTION ENTRANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS WHERE VEHICLES ACCESS THE CONSTRUCTION SITE FROM PAVED RIGHT-OF-WAYS.

4. STABILIZED CONSTRUCTION ENTRANCE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND DISTURBING ACTIVITIES.

5. A NON-WOVEN GEOTEXTILE FABRIC SHALL BE PLACED UNDER THE STABILIZED CONSTRUCTION ENTRANCE/EXIT PRIOR TO THE PLACEMENT OF ROCK.

6. UNLESS OTHERWISE SPECIFIED BY LOCAL JURISDICTION, ROCK SHALL CONSIST OF DOT SECT. #703, AASHTO #3 COARSE AGGREGATE OR 6" (MINUS) ROCK.

STABILIZED CONSTRUCTION ENTRANCE/EXIT MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. ROCK SHALL BE REAPPLIED OR REGRADED AS NECESSARY TO THE STABILIZED ENTRANCE/EXIT TO MAINTAIN A CONSISTENT DEPTH.

5. SEDIMENT TRACKED ONTO PAVED ROADS IS TO BE REMOVED THROUGHOUT THE DAY AND AT THE END OF THE DAY BY SHOVELING OR SWEEPING. SEDIMENT MAY NOT BE WASHED DOWN STORM SEWER DRAINS.

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

(DETAILS ADAPTED FROM CITY OF BROOMFIELD, COLORADO, NOT AVAILABLE IN AUTOCAD)

Description

A silt fence is a woven geotextile fabric attached to wooden posts and trenched into the ground. It is designed as a sediment barrier to intercept sheet flow runoff from disturbed areas.

Appropriate Uses

A silt fence can be used where runoff is conveyed from a disturbed area as sheet flow. Silt fence is not designed to receive concentrated flow or to be used as a filter fabric. Typical uses include:

- Down slope of a disturbed area to accept sheet flow.
- Along the perimeter of a receiving water such as a stream, pond or wetland.



Photograph SF-1. Silt fence creates a sediment barrier, forcing sheet flow runoff to evaporate or infiltrate.

• At the perimeter of a construction site.

Design and Installation

Silt fence should be installed along the contour of slopes so that it intercepts sheet flow. The maximum recommended tributary drainage area per 100 lineal feet of silt fence, installed along the contour, is approximately 0.25 acres with a disturbed slope length of up to 150 feet and a tributary slope gradient no steeper than 3:1. Longer and steeper slopes require additional measures. This recommendation only applies to silt fence installed along the contour. Silt fence installed for other uses, such as perimeter control, should be installed in a way that will not produce concentrated flows. For example, a "J-hook" installation may be appropriate to force runoff to pond and evaporate or infiltrate in multiple areas rather than concentrate and cause erosive conditions parallel to the silt fence.

See Detail SF-1 for proper silt fence installation, which involves proper trenching, staking, securing the fabric to the stakes, and backfilling the silt fence. Properly installed silt fence should not be easily pulled out by hand and there should be no gaps between the ground and the fabric.

Silt fence must meet the minimum allowable strength requirements, depth of installation requirement, and

other specifications in the design details. Improper installation of silt fence is a common reason for silt fence failure; however, when properly installed and used for the appropriate purposes, it can be highly effective.

Silt Fence	
Functions	
Erosion Control	No
Sediment Control	Yes
Site/Material Management	No


Maintenance and Removal

Inspection of silt fence includes observing the material for tears or holes and checking for slumping fence and undercut areas bypassing flows. Repair of silt fence typically involves replacing the damaged section with a new section. Sediment accumulated behind silt fence should be removed, as needed to maintain BMP effectiveness, typically before it reaches a depth of 6 inches.

Silt fence may be removed when the upstream area has reached final stabilization.



Photograph SF-2. When silt fence is not installed along the contour, a "J-hook" installation may be appropriate to ensure that the BMP does not create concentrated flow parallel to the silt fence. Photo courtesy of Tom Gore.

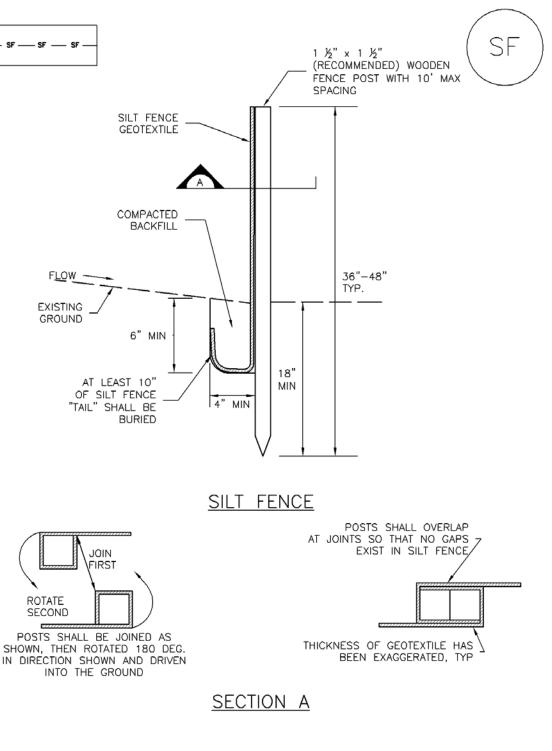

SF-1. SILT FENCE

SILT FENCE INSTALLATION NOTES

1. SILT FENCE MUST BE PLACED AWAY FROM THE TOE OF THE SLOPE TO ALLOW FOR WATER PONDING. SILT FENCE AT THE TOE OF A SLOPE SHOULD BE INSTALLED IN A FLAT LOCATION AT LEAST SEVERAL FEET (2–5 FT) FROM THE TOE OF THE SLOPE TO ALLOW ROOM FOR PONDING AND DEPOSITION.

2. A UNIFORM 6" X 4" ANCHOR TRENCH SHALL BE EXCAVATED USING TRENCHER OR SILT FENCE INSTALLATION DEVICE. NO ROAD GRADERS, BACKHOES, OR SIMILAR EQUIPMENT SHALL BE USED.

3. COMPACT ANCHOR TRENCH BY HAND WITH A "JUMPING JACK" OR BY WHEEL ROLLING. COMPACTION SHALL BE SUCH THAT SILT FENCE RESISTS BEING PULLED OUT OF ANCHOR TRENCH BY HAND.

4. SILT FENCE SHALL BE PULLED TIGHT AS IT IS ANCHORED TO THE STAKES. THERE SHOULD BE NO NOTICEABLE SAG BETWEEN STAKES AFTER IT HAS BEEN ANCHORED TO THE STAKES.

5. SILT FENCE FABRIC SHALL BE ANCHORED TO THE STAKES USING 1" HEAVY DUTY STAPLES OR NAILS WITH 1" HEADS. STAPLES AND NAILS SHOULD BE PLACED 3" ALONG THE FABRIC DOWN THE STAKE.

6. AT THE END OF A RUN OF SILT FENCE ALONG A CONTOUR, THE SILT FENCE SHOULD BE TURNED PERPENDICULAR TO THE CONTOUR TO CREATE A "J-HOOK." THE "J-HOOK" EXTENDING PERPENDICULAR TO THE CONTOUR SHOULD BE OF SUFFICIENT LENGTH TO KEEP RUNOFF FROM FLOWING AROUND THE END OF THE SILT FENCE (TYPICALLY 10' - 20').

7. SILT FENCE SHALL BE INSTALLED PRIOR TO ANY LAND DISTURBING ACTIVITIES.

SILT FENCE MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs have failed, Repair or Replacement should be initiated upon discovery of the failure.

4. SEDIMENT ACCUMULATED UPSTREAM OF THE SILT FENCE SHALL BE REMOVED AS NEEDED TO MAINTAIN THE FUNCTIONALITY OF THE BMP, TYPICALLY WHEN DEPTH OF ACCUMULATED SEDIMENTS IS APPROXIMATELY 6".

5. REPAIR OR REPLACE SILT FENCE WHEN THERE ARE SIGNS OF WEAR, SUCH AS SAGGING, TEARING, OR COLLAPSE.

6. SILT FENCE IS TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND APPROVED BY THE LOCAL JURISDICTION, OR IS REPLACED BY AN EQUIVALENT PERIMETER SEDIMENT CONTROL BMP.

7. WHEN SILT FENCE IS REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.

(DETAIL ADAPTED FROM TOWN OF PARKER, COLORADO AND CITY OF AURORA, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

A straw bale barrier is a linear wall of straw bales designed to intercept sheet flow and trap sediment before runoff exits a disturbed area.

Appropriate Uses

Appropriate uses of properly installed straw bale barriers may include:

- As a perimeter control for a site or soil stockpile.
- As a sediment control at the toe of an erodible slope.



Photograph SBB-1. Straw bale barrier used for perimeter control. Photo courtesy of Tom Gore.

- Along the edge of a stream or drainage pathway to reduce sediment laden runoff from entering the waterway.
- As part of an inlet protection design in sump conditions (See Inlet Protection BMP).

Do not use straw bale barriers in areas of concentrated flow or in areas where ponding is not desirable. Straw bales tend to degrade quickly, so they should generally not be used in areas where longer term disturbance is expected.

Due to a history of inappropriate placement, poor installation, and short effective lifespan, the use of straw bales is discouraged or prohibited by some communities.

Design and Installation


The maximum recommended tributary drainage area per 100 lineal feet of straw bale barrier is 0.25 acres with a disturbed slope length of up to 150 feet and a tributary slope gradient no steeper than 3:1; longer and steeper slopes require additional measures. Design details with notes are provided in Detail SBB-1. To be effective, bales must be installed in accordance with the design details with proper trenching, staking, and binding. Jute and cotton string must not be used to bind the straw bale. The bales should be certified weed-free prior to use.

Maintenance and Removal

Check bales for rotting and replace as necessary. Straw bales degrade, and rotting bales require replacement on a regular basis (as often as every three months) depending on environmental conditions.

Check for undercutting, bypassed flows, and displacement. Repair by properly re-installing the straw bale barrier and repairing washouts around the bales. Remove sediment accumulated behind the bale when it reaches one-quarter of the bale height. Remove and properly dispose of the straw bale once the upstream area has been stabilized. Areas of disturbance beneath the bale should be seeded and mulched when the bale is removed.

Straw Bale Barrier			
Functions			
Erosion Control	No		
Sediment Control	Moderate		
Site/Material Management	No		

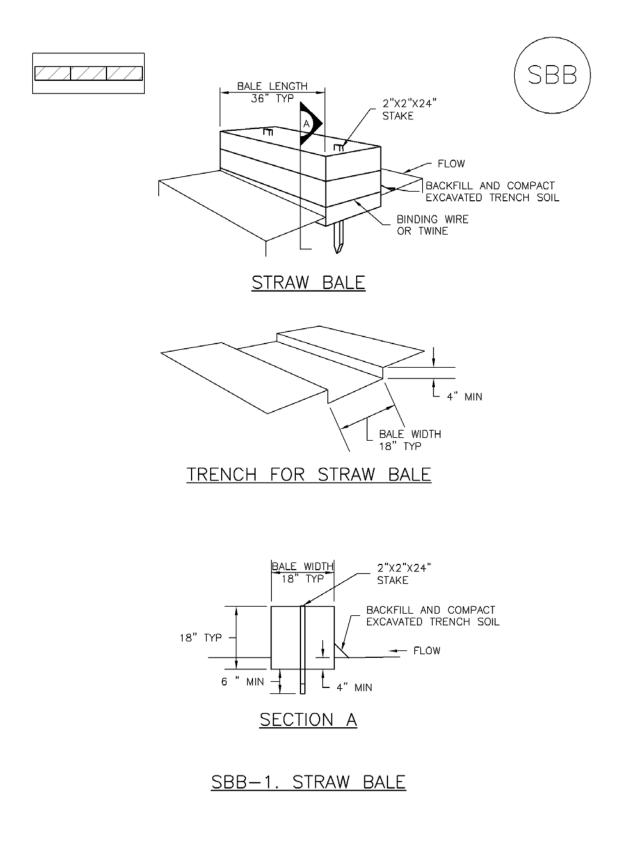

1. SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES.

2. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FREE STRAW OR HAY. LOCAL JURISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WEED FREE.

3. STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 CUBIC FEET OF STRAW OR HAY AND WEIGH NOT LESS THAN 35 POUNDS.

4. WHEN STRAW BALES ARE USED IN SERIES AS A BARRIER, THE END OF EACH BALE SHALL BE TIGHTLY ABUTTING ONE ANOTHER.

5. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 36"X18"X18".

6. A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO A DEPTH OF 4". STRAW BALES SHALL BE PLACED SO THAT BINDING TWINE IS ENCOMPASSING THE VERTICAL SIDES OF THE BALE(S). ALL EXCAVATED SOIL SHALL BE PLACED ON THE UPHILL SIDE OF THE STRAW BALE(S) AND COMPACTED.

7. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD EACH BALE IN PLACE. WOODEN STAKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE DRIVEN 6" INTO THE GROUND.

STRAW BALE MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPS HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. STRAW BALES SHALL BE REPLACED IF THEY BECOME HEAVILY SOILED, ROTTEN, OR DAMAGED BEYOND REPAIR.

5. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE BARRIER SHALL BE REMOVED AS NEEDED TO MAINTAIN FUNCTIONALITY OF THE BMP, TYPICALLY WHEN DEPTH OF ACCUMULATED SEDIMENTS IS APPROXIMATELY ¼ OF THE HEIGHT OF THE STRAW BALE BARRIER.

6. STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND APPROVED BY THE LOCAL JURISDICTION.

7. WHEN STRAW BALES ARE REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.

(DETAILS ADAPTED FROM TOWN OF PARKER, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

A sediment basin is a temporary pond built on a construction site to capture eroded or disturbed soil transported in storm runoff prior to discharge from the site. Sediment basins are designed to capture site runoff and slowly release it to allow time for settling of sediment prior to discharge. Sediment basins are often constructed in locations that will later be modified to serve as post-construction stormwater basins.

Appropriate Uses

Most large construction sites (typically greater than 2 acres) will require one or more sediment basins for effective



Photograph SB-1. Sediment basin at the toe of a slope. Photo courtesy of WWE.

management of construction site runoff. On linear construction projects, sediment basins may be impractical; instead, sediment traps or other combinations of BMPs may be more appropriate.

Sediment basins should not be used as stand-alone sediment controls. Erosion and other sediment controls should also be implemented upstream.

When feasible, the sediment basin should be installed in the same location where a permanent postconstruction detention pond will be located.

Design and Installation

The design procedure for a sediment basin includes these steps:

- Basin Storage Volume: Provide a storage volume of at least 3,600 cubic feet per acre of drainage area. To the extent practical, undisturbed and/or off-site areas should be diverted around sediment basins to prevent "clean" runoff from mixing with runoff from disturbed areas. For undisturbed areas (both on-site and off-site) that cannot be diverted around the sediment basin, provide a minimum of 500 ft³/acre of storage for undeveloped (but stable) off-site areas in addition to the 3,600 ft³/acre for disturbed areas. For stable, developed areas that cannot be diverted around the sediment basin, storage volume requirements are summarized in Table SB-1.
- Basin Geometry: Design basin with a minimum length-to-width ratio of 2:1 (L:W). If this cannot be achieved because of site space constraints, baffling may be required to extend the effective distance between the inflow point(s) and the outlet to minimize short-circuiting.
 Sediment Basins
- **Dam Embankment**: It is recommended that embankment slopes be 4:1 (H:V) or flatter and no steeper than 3:1 (H:V) in any location.

Sediment Basins			
Functions			
Erosion Control	No		
Sediment Control	Yes		
Site/Material Management	No		

• **Inflow Structure**: For concentrated flow entering the basin, provide energy dissipation at the point of inflow.

Imperviousness (%)	Additional Storage Volume (ft³)Per Acre of Tributary Area		
Undeveloped	500		
10	800		
20	1230		
30	1600		
40	2030		
50	2470		
60	2980		
70	3560		
80	4360		
90	5300		
100	6460		

Table SB-1. Additional Volume Requirements for Undisturbed and Developed Tributary Areas Draining through Sediment Basins

- **Outlet Works**: The outlet pipe shall extend through the embankment at a minimum slope of 0.5 percent. Outlet works can be designed using one of the following approaches:
 - **Riser Pipe (Simplified Detail):** Detail SB-1 provides a simplified design for basins treating no more than 15 acres.
 - **Orifice Plate or Riser Pipe**: Follow the design criteria for Full Spectrum Detention outlets in the EDB Fact Sheet provided in Chapter 4 of this manual for sizing of outlet perforations with an emptying time of approximately 72 hours. In lieu of the trash rack, pack uniformly sized 1¹/₂ to 2-inch gravel in front of the plate or surrounding the riser pipe. This gravel will need to be cleaned out frequently during the construction period as sediment accumulates within it. The gravel pack will need to be removed and disposed of following construction to reclaim the basin for use as a permanent detention facility. If the basin will be used as a permanent extended detention basin for the site, a trash rack will need to be installed once contributing drainage areas have been stabilized and the gravel pack and accumulated sediment have been removed.
 - Floating Skimmer: If a floating skimmer is used, install it using manufacturer's recommendations. Illustration SB-1 provides an illustration of a Faircloth Skimmer Floating OutletTM, one of the more commonly used floating skimmer outlets. A skimmer should be designed to release the design volume in no less than 48 hours. The use of a floating skimmer outlet can increase the sediment capture efficiency of a basin significantly. A floating outlet continually decants cleanest water off the surface of the pond and releases cleaner water than would discharge from a perforated riser pipe or plate.

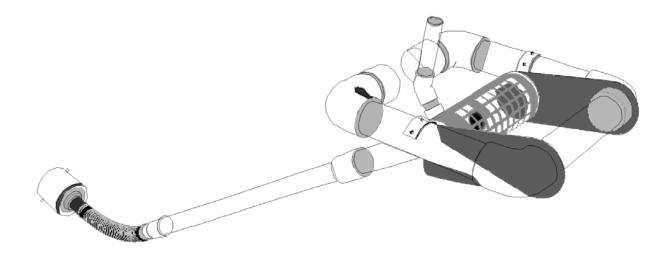


Illustration SB-1. Outlet structure for a temporary sediment basin - Faircloth Skimmer Floating Outlet. Illustration courtesy of J. W. Faircloth & Sons, Inc., FairclothSkimmer.com.

- **Outlet Protection and Spillway:** Consider all flow paths for runoff leaving the basin, including protection at the typical point of discharge as well as overtopping.
 - **Outlet Protection:** Outlet protection should be provided where the velocity of flow will exceed the maximum permissible velocity of the material of the waterway into which discharge occurs. This may require the use of a riprap apron at the outlet location and/or other measures to keep the waterway from eroding.
 - **Emergency Spillway:** Provide a stabilized emergency overflow spillway for rainstorms that exceed the capacity of the sediment basin volume and its outlet. Protect basin embankments from erosion and overtopping. If the sediment basin will be converted to a permanent detention basin, design and construct the emergency spillway(s) as required for the permanent facility. If the sediment basin will not become a permanent detention basin, it may be possible to substitute a heavy polyvinyl membrane or properly bedded rock cover to line the spillway and downstream embankment, depending on the height, slope, and width of the embankments.

Maintenance and Removal

Maintenance activities include the following:

- Dredge sediment from the basin, as needed to maintain BMP effectiveness, typically when the design storage volume is no more than one-third filled with sediment.
- Inspect the sediment basin embankments for stability and seepage.
- Inspect the inlet and outlet of the basin, repair damage, and remove debris. Remove, clean and replace the gravel around the outlet on a regular basis to remove the accumulated sediment within it and keep the outlet functioning.
- Be aware that removal of a sediment basin may require dewatering and associated permit requirements.
- Do not remove a sediment basin until the upstream area has been stabilized with vegetation.

Final disposition of the sediment basin depends on whether the basin will be converted to a permanent post-construction stormwater basin or whether the basin area will be returned to grade. For basins being converted to permanent detention basins, remove accumulated sediment and reconfigure the basin and outlet to meet the requirements of the final design for the detention facility. If the sediment basin is not to be used as a permanent detention facility, fill the excavated area with soil and stabilize with vegetation.

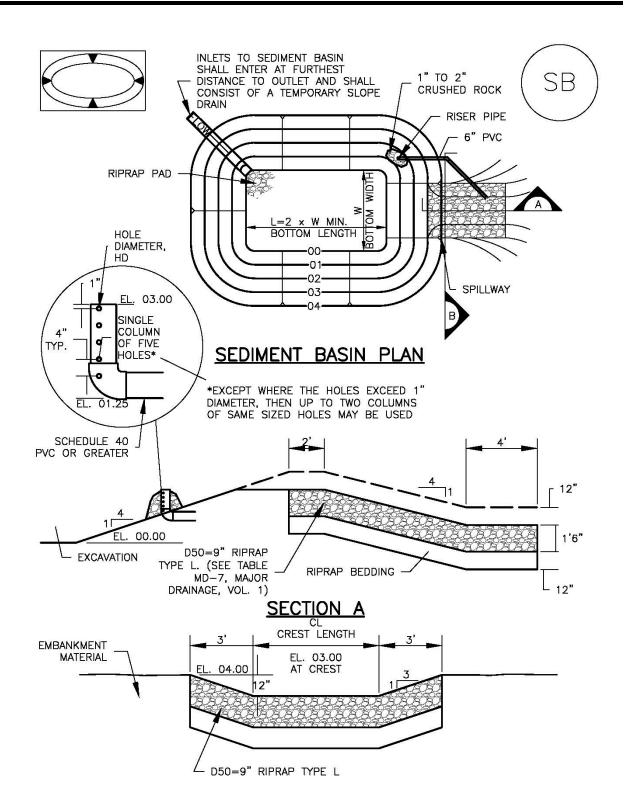


TABLE SB-1. SIZING INFORMATION FOR STANDARD SEDIMENT BASIN				
Upstream Drainage Area (rounded to nearest acre), (ac)	Basin Bottom Width (W), (ft)	Spillway Crest Length (CL), (ft)	Hole Diameter (HD), (in)	
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	12 ½ 21 28 33 ½ 43 47 ¼ 51 55 58 ¼ 61 64 67 ½ 70 ½ 73 ¼	2 3 5 6 8 9 11 12 13 15 16 18 19 21 22	932 13/6 12 9%6 21/32 25/32 25/32 27/32 27/32 78 15/6 31/36 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

SEDIMENT BASIN INSTALLATION NOTES

- 1. SEE PLAN VIEW FOR:
 - -LOCATION OF SEDIMENT BASIN.

-TYPE OF BASIN (STANDARD BASIN OR NONSTANDARD BASIN).

-FOR STANDARD BASIN, BOTTOM WIDTH W, CREST LENGTH CL, AND HOLE DIAMETER, HD.

-FOR NONSTANDARD BASIN, SEE CONSTRUCTION DRAWINGS FOR DESIGN OF BASIN INCLUDING RISER HEIGHT H, NUMBER OF COLUMNS N, HOLE DIAMETER HD AND PIPE DIAMETER D.

2. FOR STANDARD BASIN, BOTTOM DIMENSION MAY BE MODIFIED AS LONG AS BOTTOM AREA IS NOT REDUCED.

3. SEDIMENT BASINS SHALL BE INSTALLED PRIOR TO ANY OTHER LAND-DISTURBING ACTIVITY THAT RELIES ON ON BASINS AS AS A STORMWATER CONTROL.

4. EMBANKMENT MATERIAL SHALL CONSIST OF SOIL FREE OF DEBRIS, ORGANIC MATERIAL, AND ROCKS OR CONCRETE GREATER THAN 3 INCHES AND SHALL HAVE A MINIMUM OF 15 PERCENT BY WEIGHT PASSING THE NO. 200 SIEVE.

5. EMBANKMENT MATERIAL SHALL BE COMPACTED TO AT LEAST 95 PERCENT OF MAXIMUM DENSITY IN ACCORDANCE WITH ASTM D698.

6. PIPE SCH 40 OR GREATER SHALL BE USED.

7. THE DETAILS SHOWN ON THESE SHEETS PERTAIN TO STANDARD SEDIMENT BASIN(S) FOR DRAINAGE AREAS LESS THAN 15 ACRES. SEE CONSTRUCTION DRAWINGS FOR EMBANKMENT, STORAGE VOLUME, SPILLWAY, OUTLET, AND OUTLET PROTECTION DETAILS FOR ANY SEDIMENT BASIN(S) THAT HAVE BEEN INDIVIDUALLY DESIGNED FOR DRAINAGE AREAS LARGER THAN 15 ACRES.

SEDIMENT BASIN MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. SEDIMENT ACCUMULATED IN BASIN SHALL BE REMOVED AS NEEDED TO MAINTAIN BMP EFFECTIVENESS, TYPICALLY WHEN SEDIMENT DEPTH REACHES ONE FOOT (I.E., TWO FEET BELOW THE SPILLWAY CREST).

5. SEDIMENT BASINS ARE TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND GRASS COVER IS ACCEPTED BY THE LOCAL JURISDICTION.

6. WHEN SEDIMENT BASINS ARE REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.

(DETAILS ADAPTED FROM DOUGLAS COUNTY, COLORADO)


NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

Outlet protection helps to reduce erosion immediately downstream of a pipe, culvert, slope drain, rundown or other conveyance with concentrated, highvelocity flows. Typical outlet protection consists of riprap or rock aprons at the conveyance outlet.

Appropriate Uses

Outlet protection should be used when a conveyance discharges onto a disturbed

area where there is potential for accelerated erosion due to concentrated flow. Outlet



protection should be provided where the velocity at the culvert outlet exceeds the maximum permissible velocity of the material in the receiving channel.

Note: This Fact Sheet and detail are for temporary outlet protection, outlets that are intended to be used for less than 2 years. For permanent, long-term outlet protection, see the *Major Drainage* chapter of Volume 1.

Design and Installation

Design outlet protection to handle runoff from the largest drainage area that may be contributing runoff during construction (the drainage area may change as a result of grading). Key in rock, around the entire perimeter of the apron, to a minimum depth of 6 inches for stability. Extend riprap to the height of the culvert or the normal flow depth of the downstream channel, whichever is less. Additional erosion control measures such as vegetative lining, turf reinforcement mat and/or other channel lining methods may be required downstream of the outlet protection if the channel is susceptible to erosion. See Design Detail OP-1 for additional information.

Maintenance and Removal

Inspect apron for damage and displaced rocks. If rocks are missing or significantly displaced, repair or replace as necessary. If rocks are continuously missing or displaced, consider increasing the size of the riprap or deeper keying of the perimeter.

Remove sediment accumulated at the outlet before the outlet protection becomes buried and ineffective. When sediment accumulation is noted, check that upgradient BMPs, including inlet protection, are in effective operating condition.

Outlet protection may be removed once the pipe is no longer draining an upstream area, or once the downstream area has been sufficiently stabilized. If the drainage pipe is permanent, outlet protection can be left in place; however, permanent outlet protection should be designed and constructed in accordance with the requirements of the *Major Drainage* chapter of Volume 2.

Outlet Protection			
Functions			
Erosion Control	Yes		
Sediment Control	Moderate		
Site/Material Management	No		



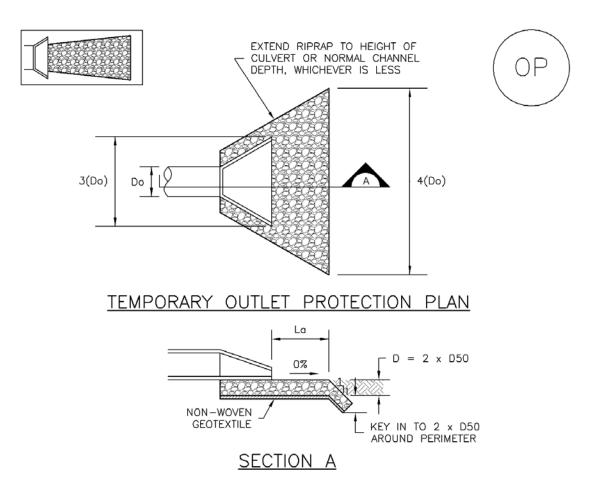


	TABLE OP-1. TEMPORARY OUTLET PROTECTION SIZING TABLE					
	PIPE DIAMETER, DISCHARGE, Do (INCHES) Q (CFS) (FT) (INCHES) RIPRAP D50 DIAMETER MIN (FT) (INCHES)					
	8 2.5 5 4 5 10 6					
	12	5 10	10 13	4 6		
	18	10 20 30 40	10 16 23 26	6 9 12 16		
	24	30 40 50 60	16 26 26 30	9 9 12 16		
<u> 0P-</u>	1. TEMP	ORARY	OUTLET	PROTEC	TION	

TEMPORARY OUTLET PROTECTION INSTALLATION NOTES

1. SEE PLAN VIEW FOR -LOCATION OF OUTLET PROTECTION. -DIMENSIONS OF OUTLET PROTECTION.

2. DETAIL IS INTENDED FOR PIPES WITH SLOPE \leq 10%. ADDITIONAL EVALUATION OF RIPRAP SIZING AND OUTLET PROTECTION DIMENSIONS REQUIRED FOR STEEPER SLOPES.

3. TEMPORARY OUTLET PROTECTION INFORMATION IS FOR OUTLETS INTENDED TO BE UTILIZED LESS THAN 2 YEARS.

TEMPORARY OUTLET PROTECTION INSPECTION AND MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs have failed, Repair or Replacement should be initiated upon discovery of the failure.

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

(DETAILS ADAPTED FROM AURORA, COLORADO AND PREVIOUS VERSION OF VOLUME 3, NOT AVAILABLE IN AUTOCAD)

Earth dikes and drainage swales are temporary storm conveyance channels constructed either to divert runoff around slopes or to convey runoff to additional sediment control BMPs prior to discharge of runoff from a site. Drainage swales may be lined or unlined, but if an unlined swale is used, it must be well compacted and capable of resisting erosive velocities.

Appropriate Uses

Earth dikes and drainage swales are typically used to control the flow path of runoff at a construction site by diverting runoff around areas prone to erosion, such as steep slopes. Earth dikes and drainage swales may also be constructed as temporary conveyance features. This will direct runoff to additional sediment control treatment BMPs, such as sediment traps or basins.



Photograph ED/DS-1. Example of an earth dike used to divert flows at a construction site. Photo courtesy of CDOT.

Design and Installation

When earth dikes are used to divert water for slope protection, the earth dike typically consists of a horizontal ridge of soil placed perpendicular to the slope and angled slightly to provide drainage along the contour. The dike is used in conjunction with a swale or a small channel upslope of the berm to convey the diverted water. Temporary diversion dikes can be constructed by excavation of a V-shaped trench or ditch and placement of the fill on the downslope side of the cut. There are two types of placement for temporary slope diversion dikes:

- A dike located at the top of a slope to divert upland runoff away from the disturbed area and convey it in a temporary or permanent channel.
- A diversion dike located at the base or mid-slope of a disturbed area to intercept runoff and reduce the effective slope length.

Depending on the project, either an earth dike or drainage swale may be more appropriate. If there is a

need for cut on the project, then an excavated drainage swale may be better suited. When the project is primarily fill, then a conveyance constructed using a berm may be the better option.

All dikes or swales receiving runoff from a disturbed area should direct stormwater to a sediment control BMP such as a sediment trap or basin.

Earth Dikes and Drainage Swales				
Functions				
Erosion Control	Yes			
Sediment Control	Moderate			
Site/Material Management	No			

EC-10 Earth Dikes and Drainage Swales (ED/DS)

Unlined dikes or swales should only be used for intercepting sheet flow runoff and are not intended for diversion of concentrated flows.

Details with notes are provided for several design variations, including:


- ED-1. Unlined Earth Dike formed by Berm
- DS-1. Unlined Excavated Swale
- DS-2. Unlined Swale Formed by Cut and Fill
- DS-3. ECB-lined Swale
- DS-4. Synthetic-lined Swale
- DS-5. Riprap-lined Swale


The details also include guidance on permissible velocities for cohesive channels if unlined approaches will be used.

Maintenance and Removal

Inspect earth dikes for stability, compaction, and signs of erosion and repair. Inspect side slopes for erosion and damage to erosion control fabric. Stabilize slopes and repair fabric as necessary. If there is reoccurring extensive damage, consider installing rock check dams or lining the channel with riprap.

If drainage swales are not permanent, remove dikes and fill channels when the upstream area is stabilized. Stabilize the fill or disturbed area immediately following removal by revegetation or other permanent stabilization method approved by the local jurisdiction.

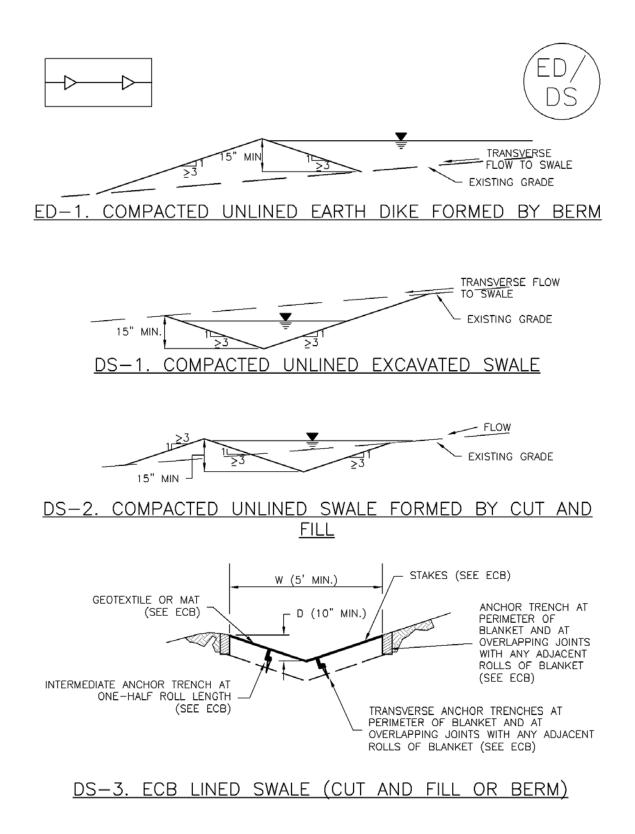

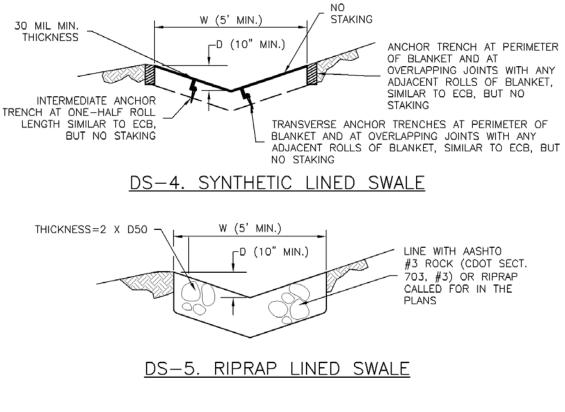

EARTH DIKE AND DRAINAGE SWALE INSTALLATION NOTES

- 1. SEE SITE PLAN FOR:
 - LOCATION OF DIVERSION SWALE
 - TYPE OF SWALE (UNLINED, COMPACTED AND/OR LINED).
 - LENGTH OF EACH SWALE.
 - DEPTH, D, AND WIDTH, W DIMENSIONS.
 - FOR ECB/TRM LINED DITCH, SEE ECB DETAIL.
 - FOR RIPRAP LINED DITCH, SIZE OF RIPRAP, D50.

2. SEE DRAINAGE PLANS FOR DETAILS OF PERMANENT CONVEYANCE FACILITIES AND/OR DIVERSION SWALES EXCEEDING 2-YEAR FLOW RATE OR 10 CFS.

3. EARTH DIKES AND SWALES INDICATED ON SWMP PLAN SHALL BE INSTALLED PRIOR TO LAND-DISTURBING ACTIVITIES IN PROXIMITY.

4. EMBANKMENT IS TO BE COMPACTED TO 90% OF MAXIMUM DENSITY AND WITHIN 2% OF OPTIMUM MOISTURE CONTENT ACCORDING TO ASTM D698.

5. SWALES ARE TO DRAIN TO A SEDIMENT CONTROL BMP.

6. FOR LINED DITCHES, INSTALLATION OF ECB/TRM SHALL CONFORM TO THE REQUIREMENTS OF THE ECB DETAIL.

7. WHEN CONSTRUCTION TRAFFIC MUST CROSS A DIVERSION SWALE, INSTALL A TEMPORARY CULVERT WITH A MINIMUM DIAMETER OF 12 INCHES.

EARTH DIKE AND DRAINAGE SWALE MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPS HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. SWALES SHALL REMAIN IN PLACE UNTIL THE END OF CONSTRUCTION; IF APPROVED BY LOCAL JURISDICTION, SWALES MAY BE LEFT IN PLACE.

5. WHEN A SWALE IS REMOVED, THE DISTURBED AREA SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED IN A MANNER APPROVED BY LOCAL JURISDICTION.

(DETAIL ADAPTED FROM DOUGLAS COUNTY, COLORADO AND THE CITY OF COLORADO SPRINGS, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

Stockpile management includes measures to minimize erosion and sediment transport from soil stockpiles.

Appropriate Uses

Stockpile management should be used when soils or other erodible materials are stored at the construction site. Special attention should be given to stockpiles in close proximity to natural or manmade storm systems.



Photograph SP-1. A topsoil stockpile that has been partially revegetated and is protected by silt fence perimeter control.

Design and Installation

Locate stockpiles away from all drainage system components including storm sewer inlets. Where practical, choose stockpile locations that that will remain undisturbed for the longest period of time as the phases of construction progress. Place sediment control BMPs around the perimeter of the stockpile, such as sediment control logs, rock socks, silt fence, straw bales and sand bags. See Detail SP-1 for guidance on proper establishment of perimeter controls around a stockpile. For stockpiles in active use, provide a stabilized designated access point on the upgradient side of the stockpile.

Stabilize the stockpile surface with surface roughening, temporary seeding and mulching, erosion control blankets, or soil binders. Soils stockpiled for an extended period (typically for more than 60 days) should be seeded and mulched with a temporary grass cover once the stockpile is placed (typically within 14 days). Use of mulch only or a soil binder is acceptable if the stockpile will be in place for a more limited time period (typically 30-60 days). Timeframes for stabilization of stockpiles noted in this fact sheet are "typical" guidelines. Check permit requirements for specific federal, state, and/or local requirements that may be more prescriptive.

Stockpiles should not be placed in streets or paved areas unless no other practical alternative exists. See the Stabilized Staging Area Fact Sheet for guidance when staging in roadways is unavoidable due to space or right-of-way constraints. For paved areas, rock socks must be used for perimeter control and all inlets with the potential to receive sediment from the stockpile (even from vehicle tracking) must be protected.


Maintenance and Removal

Inspect perimeter controls and inlet protection in accordance with their respective BMP Fact Sheets. Where seeding, mulch and/or soil binders are used, reseeding or reapplication of soil binder may be necessary.

When temporary removal of a perimeter BMP is necessary to access a stockpile, ensure BMPs are reinstalled in accordance with their respective design detail section.

Stockpile Management			
Functions			
Erosion Control	Yes		
Sediment Control	Yes		
Site/Material Management	Yes		

When the stockpile is no longer needed, properly dispose of excess materials and revegetate or otherwise stabilize the ground surface where the stockpile was located.

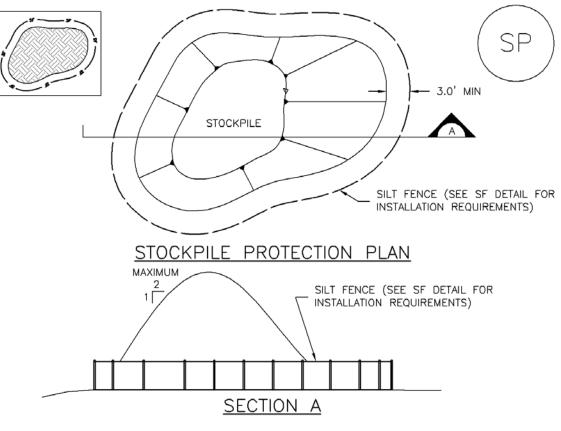

<u>SP-1. STOCKPILE PROTECTION</u>

STOCKPILE PROTECTION INSTALLATION NOTES

1. SEE PLAN VIEW FOR: -LOCATION OF STOCKPILES. -TYPE OF STOCKPILE PROTECTION.

2. INSTALL PERIMETER CONTROLS IN ACCORDANCE WITH THEIR RESPECTIVE DESIGN DETAILS. SILT FENCE IS SHOWN IN THE STOCKPILE PROTECTION DETAILS; HOWEVER, OTHER TYPES OF PERIMETER CONTROLS INCLUDING SEDIMENT CONTROL LOGS OR ROCK SOCKS MAY BE SUITABLE IN SOME CIRCUMSTANCES. CONSIDERATIONS FOR DETERMINING THE APPROPRIATE TYPE OF PERIMETER CONTROL FOR A STOCKPILE INCLUDE WHETHER THE STOCKPILE IS LOCATED ON A PERVIOUS OR IMPERVIOUS SURFACE, THE RELATIVE HEIGHTS OF THE PERIMETER CONTROL AND STOCKPILE, THE ABILITY OF THE PERIMETER CONTROL TO CONTAIN THE STOCKPILE WITHOUT FAILING IN THE EVENT THAT MATERIAL FROM THE STOCKPILE SHIFTS OR SLUMPS AGAINST THE PERIMETER, AND OTHER FACTORS.

3. STABILIZE THE STOCKPILE SURFACE WITH SURFACE ROUGHENING, TEMPORARY SEEDING AND MULCHING, EROSION CONTROL BLANKETS, OR SOIL BINDERS. SOILS STOCKPILED FOR AN EXTENDED PERIOD (TYPICALLY FOR MORE THAN 60 DAYS) SHOULD BE SEEDED AND MULCHED WITH A TEMPORARY GRASS COVER ONCE THE STOCKPILE IS PLACED (TYPICALLY WITHIN 14 DAYS). USE OF MULCH ONLY OR A SOIL BINDER IS ACCEPTABLE IF THE STOCKPILE WILL BE IN PLACE FOR A MORE LIMITED TIME PERIOD (TYPICALLY 30-60 DAYS).

4. FOR TEMPORARY STOCKPILES ON THE INTERIOR PORTION OF A CONSTRUCTION SITE, WHERE OTHER DOWNGRADIENT CONTROLS, INCLUDING PERIMETER CONTROL, ARE IN PLACE, STOCKPILE PERIMETER CONTROLS MAY NOT BE REQUIRED.

STOCKPILE PROTECTION MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPS HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.


STOCKPILE PROTECTION MAINTENANCE NOTES

4. IF PERIMETER PROTECTION MUST BE MOVED TO ACCESS SOIL STOCKPILE, REPLACE PERIMETER CONTROLS BY THE END OF THE WORKDAY.

5. STOCKPILE PERIMETER CONTROLS CAN BE REMOVED ONCE ALL THE MATERIAL FROM THE STOCKPILE HAS BEEN USED.

(DETAILS ADAPTED FROM PARKER, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

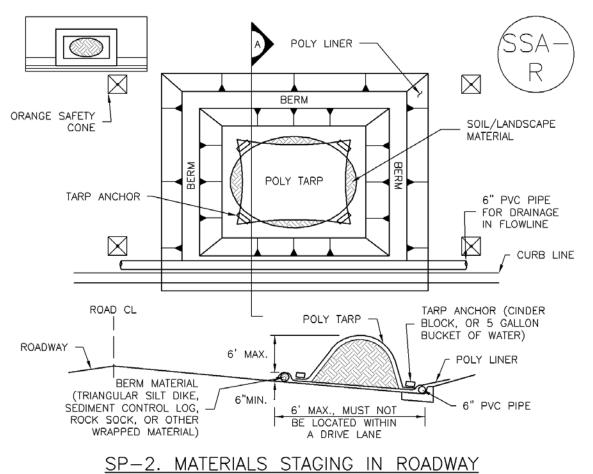

MATERIALS STAGING IN ROADWAYS INSTALLATION NOTES

- 1. SEE PLAN VIEW FOR
 - -LOCATION OF MATERIAL STAGING AREA(S).

-CONTRACTOR MAY ADJUST LOCATION AND SIZE OF STAGING AREA WITH APPROVAL FROM THE LOCAL JURISDICTION.

2. FEATURE MUST BE INSTALLED PRIOR TO EXCAVATION, EARTHWORK OR DELIVERY OF MATERIALS.

3. MATERIALS MUST BE STATIONED ON THE POLY LINER. ANY INCIDENTAL MATERIALS DEPOSITED ON PAVED SECTION OR ALONG CURB LINE MUST BE CLEANED UP PROMPTLY.

4. POLY LINER AND TARP COVER SHOULD BE OF SIGNIFICANT THICKNESS TO PREVENT DAMAGE OR LOSS OF INTEGRITY.

5. SAND BAGS MAY BE SUBSTITUTED TO ANCHOR THE COVER TARP OR PROVIDE BERMING UNDER THE BASE LINER.

6. FEATURE IS NOT INTENDED FOR USE WITH WET MATERIAL THAT WILL BE DRAINING AND/OR SPREADING OUT ON THE POLY LINER OR FOR DEMOLITION MATERIALS.

7. THIS FEATURE CAN BE USED FOR:

-UTILITY REPAIRS.

-WHEN OTHER STAGING LOCATIONS AND OPTIONS ARE LIMITED.

-OTHER LIMITED APPLICATION AND SHORT DURATION STAGING.

MATERIALS STAGING IN ROADWAY MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.

2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.

3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.

4. INSPECT PVC PIPE ALONG CURB LINE FOR CLOGGING AND DEBRIS. REMOVE OBSTRUCTIONS PROMPTLY.

5. CLEAN MATERIAL FROM PAVED SURFACES BY SWEEPING OR VACUUMING.

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

(DETAILS ADAPTED FROM AURORA, COLORADO)

Spills and leaks of solid and liquid materials processed, handled or stored outdoors can be a significant source of stormwater pollutants. Spilled substances can reach receiving waters when runoff washes these materials from impervious surfaces or when spills directly enter the storm sewer system during dry weather conditions.

Effective spill control includes both spill prevention and spill response measures and depends on proper employee training for spill response measures and may also include structural spill containment, particularly at



Photograph SPCC-1. Use of secondary containment around supplies stored outside helps to reduce the likelihood of spill and leaks reaching the storm sewer system in runoff. Photo courtesy of Tom Gore.

industrial locations. Structural spill containment measures typically include temporary or permanent curbs or berms that surround a potential spill site. Berms may be constructed of concrete, earthen material, metal, synthetic liners, or other material that will safely contain the spill. Spill control devices may also include valves, slide gates, or other devices that can control and contain spilled material before it reaches the storm sewer system or receiving waters.

Appropriate Uses

Implement spill prevention, containment and control measures at municipal, commercial and industrial facilities in areas where materials may be spilled in quantities that may adversely impact receiving waters when discharged directly or through the storm sewer system. Check local, state, and/or federal regulations to determine when spill containment and control measures are required by law. Spill Prevention, Control and Countermeasures Plans may be required for certain facilities handling oil and hazardous substances sunder Section 311(j)(1)(C) of the federal Clean Water Act.

Practice Guidelines

Spill Prevention Measures

- Train employees on potential sources of pollution on-site and provide clear, common-sense spill prevention practices. Require that these practices be strictly followed.
- Identify equipment that may be exposed to stormwater, pollutants that may be generated and possible sources of leaks or discharges.

Also See These BMP Fact Sheets

- Covering Storage/Handling Areas
- Good Housekeeping
- Vehicle Fueling, Maintenance, Washing & Storage
- Preventative Maintenance
- Perform regular inspection and preventative maintenance of equipment to ensure proper operation and to check for leaks or evidence of discharge (stains). Provide clear procedures to ensure that needed repairs are completed and provide temporary leak containment until such repairs can be implemented.

- Drain or replace motor oil and other automotive fluids in a designated area away from storm sewer inlets. Collect spent fluids and recycle or dispose of properly. Never dispose of these fluids in the storm sewer or sanitary sewer.
- In fueling areas, clean up spills with dry methods (absorbents) and use damp cloths on gas pumps and damp mops on paved surfaces. Never use a hose to "wash down" a fuel spill.
- Where practical, reduce stormwater contact with equipment and materials by implementing indoor or covered storage, implementing stormwater run-on control measures and following good housekeeping practices.

Identification of Spill Areas

Identify potential spill areas, potential spill volumes, material types, frequency of material use, and drainage paths from spill areas with relation to storm sewer inlets, adjacent waterbodies, structural BMPs, and containment structures. Use this information to determine the types of spill prevention and control measures needed specific to the site conditions. Examples of potential spill locations include:

- Loading and unloading areas
- Outdoor storage areas
- Outdoor manufacturing or processing activities
- Waste disposal/storage areas
- Areas that generate significant dust or particulates (that may be subsequently deposited on the ground)
- Salt piles
- Areas prone to spills based on past experience at the site
- Locations where other routine maintenance activities occur such as equipment maintenance and cleaning, pesticide/fertilizer application, etc.

Additionally, areas where smaller leaks may occur such as parking should also have basic spill cleanup procedures.

Material Handling Procedures

From a water quality perspective, the primary principle behind effective material handling practices is to minimize exposure to stormwater. This can be accomplished by storing the material indoors under weather-resistant covering, elevating the material off the ground by using pallets, and diverting stormwater around materials storage areas. Representative outdoor materials handling procedures include:

- Keep bulk solid materials such as raw materials, sand, gravel, topsoil, compost, concrete, packing materials, metal products and other materials covered and protected from stormwater.
- When practical, store materials on impermeable surfaces.
- Store hazardous materials according to federal, state, and local hazardous materials requirements.

- Adopt procedures that reduce the chance of spills or leaks during filling or transfer of materials.
- Substitute less toxic or non-toxic materials for toxic materials.
- Store containers that are easily punctured or damaged away from high traffic areas (i.e., adopt a materials flow/plant layout plan).
- Add waste-capture containers such as collection pans for lubricating fluids.
- Store drums and containers with liquid materials on impermeable surfaces and provide secondary containment where appropriate. Drums stored outdoors should be located on pallets to minimize contact with runoff.

Spill Response Procedures and Equipment

Spill response procedures should be tailored to site-specific conditions and industry-specific regulatory requirements. General spill response procedures include:

- Containment and cleanup of spills should begin promptly after the spill is observed.
- Sweep up small quantities of dry chemical or solids to reduce exposure to runoff. Shoveling may be used for larger quantities of materials.
- Absorbents should be readily accessible in fueling areas or other areas susceptible to spills.
- Wipe up small spills with a shop rag, store shop rags in appropriate containers, dispose of rags properly or use a professional industrial cleaning service.
- Contain medium-sized spills with absorbents (e.g., kitty litter, sawdust) and use inflatable berms or absorbent "snakes" as temporary booms for the spill. Store and dispose of absorbents properly. Wet/dry vacuums may also be used, but not for volatile fluids.
- Develop procedures and locations for containing and storing leaking containers.
- Install drip pans below minor equipment leaks and properly dispose of collected material until a repair can be made.
- For large spills, first contain the spill and plug storm drain inlets where the liquid may migrate offsite, then clean up the spill.
- Excavation of spill areas to removed contaminated material may be required where large liquid spills occur on unpaved surfaces.
- An inventory of cleanup materials should be maintained onsite and strategically located based on the types and quantities of chemicals present.

Structural Spill Containment Measures

Two general approaches are often used when implementing spill containment measures. The first approach is designed to contain the entire spill. The second approach uses curbing to route spilled material to a collection basin. Both containment berming and curbing should be sized to safely contain or convey to a collection basin a spill from the largest storage tank, rail car, tank truck, or other containment device in the possible spill area. The spill containment area must have an impermeable surface (e.g.,

impermeable liner, asphalt or concrete) to prevent groundwater contamination. The containment system must be designed to enable collection and removal of spilled material through a pump or vacuum trucks, use of sorbent or gelling material, or other measures. Material removed from the spill area must be disposed of or recycled according to local, state, and federal standards.

If the capacity of the containment berming or the collection basin is exceeded, supplemental spill control measures should be available such as a portable containment device, sorbent materials, or gelling agents that eventually solidify the material. Water that collects within containment areas due to rainfall or snowmelt must be appropriately treated before release from the spill area.

Spill Plan Development

Many industries are required by federal law to have a Spill Prevention, Control and Countermeasures Plan (SPCC) that meets specific regulatory criteria when certain types and quantities of materials are used or processed at a site. These plans can be instrumental in developing a spill control plan for stormwater management purposes. Even if an SPCC plan is not legally required at a site, a spill control plan for stormwater management purposes may be necessary. Representative information appropriate for a spill control plan, building on concepts previously introduced in this Fact Sheet, includes:

- Site plan showing where materials are stored and handled, and where associated activities occur.
- Notification procedures to be used in the event of an accident
- Instructions for clean-up procedures.
- A designated person with spill response and clean-up authority.
- Training of key personnel in plan and clean-up procedures.
- Signs posted at critical locations providing a summary of SPCC plan information, phone numbers, contacts, equipment locations, etc.
- Provisions requiring spills to be cleaned up, corrective actions taken, or countermeasures implemented immediately.
- Provisions for absorbents to be made available for use in fuel areas, and for containers to be available for used absorbents.
- Prohibition on washing absorbents into the storm drainage system or into the sanitary sewer system via floor drains.
- Provision for emergency spill containment and clean-up kits in accessible and convenient locations. Kits should contain the appropriate clean-up materials applicable to the materials stored at the site.

Key Spill Notification Contacts in Colorado

- Colorado Department of Public Health and Environment Toll-Free 24-hour Environmental Emergency Spill Reporting Line: 1-877-518-5608
- National Response Center: 1-800-424-8802 (24-hour)
- Local Emergency Planning Committee (OEM): 303-273-162
- Division of Oil & Public Safety-Storage Tanks: 303-318-8547
- Oil and Gas Conservation Commission: 303-894-2100 or 1-888-235-1101 (toll-free spill/complaint line)

S-2


GRADING AND EROSION CONTROL PLANS

STANDARD NOTES FOR EL PASO COUNTY GRADING AND EROSION CONTROL PLANS

- . STORMWATER DISCHARGES FROM CONSTRUCTION SITES SHALL NOT CAUSE OR THREATEN TO CAUSE POLLUTION, CONTAMINATION, OR DEGRADATION OF STATE WATERS. ALL WORK AND EARTH DISTURBANCE SHALL BE DONE IN A MANNER THAT MINIMIZES POLLUTION OF ANY ON-SITE OR OFF-SITE WATERS, INCLUDING WETLANDS.
- 2. NOTWITHSTANDING ANYTHING DEPICTED IN THESE PLANS IN WORDS OR GRAPHIC REPRESENTATION, ALL DESIGN AND CONSTRUCTION RELATED TO ROADS, STORM DRAINAGE AND EROSION CONTROL SHALL CONFORM TO THE STANDARDS AND REQUIREMENTS OF THE MOST RECENT VERSION OF THE RELEVANT ADOPTED EL PASO COUNTY STANDARDS, INCLUDING THE LAND DEVELOPMENT CODE, THE ENGINEERING CRITERIA MANUAL, THE DRAINAGE CRITERIA MANUAL, AND THE DRAINAGE CRITERIA MANUAL VOLUME 2. ANY DEVIATIONS FROM REGULATIONS AND STANDARDS MUST BE REQUESTED, AND APPROVED, IN WRITING.
- 3. A SEPARATE STORMWATER MANAGEMENT PLAN (SMWP) FOR THIS PROJECT SHALL BE COMPLETED AND AN EROSION AND STORMWATER QUALITY CONTROL PERMIT (ESQCP) ISSUED PRIOR TO COMMENCING CONSTRUCTION. MANAGEMENT OF THE SWMP DURING CONSTRUCTION IS THE RESPONSIBILITY OF THE DESIGNATED QUALIFIED STORMWATER MANAGER OR CERTIFIED EROSION CONTROL INSPECTOR. THE SWMP SHALL BE LOCATED ON SITE AT ALL TIMES DURING CONSTRUCTION AND SHALL BE KEPT UP TO DATE WITH WORK PROGRESS AND CHANGES IN THE FIELD.
- 4. ONCE THE ESQCP IS APPROVED AND A "NOTICE TO PROCEED" HAS BEEN ISSUED, THE CONTRACTOR MAY INSTALL THE INITIAL STAGE EROSION AND SEDIMENT CONTROL MEASURES AS INDICATED ON THE APPROVED GEC. A PRECONSTRUCTION MEETING BETWEEN THE CONTRACTOR, ENGINEER, AND EL PASO COUNTY WILL BE HELD PRIOR TO ANY CONSTRUCTION. IT IS THE RESPONSIBILITY OF THE APPLICANT TO COORDINATE THE MEETING TIME AND PLACE WITH COUNTY STAFF.
- CONTROL MEASURES MUST BE INSTALLED PRIOR TO COMMENCEMENT OF ACTIVITIES THAT COULD CONTRIBUTE POLLUTANTS TO STORMWATER. CONTROL MEASURES FOR ALL SLOPES, CHANNELS, DITCHES, AND DISTURBED LAND AREAS SHALL BE INSTALLED IMMEDIATELY UPON COMPLETION OF THE DISTURBANCE
- 6. ALL TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES SHALL BE MAINTAINED AND REMAIN IN EFFECTIVE OPERATING CONDITION UNTIL PERMANENT SOIL EROSION CONTROL MEASURES ARE IMPLEMENTED AND FINAL STABILIZATION IS ESTABLISHED. ALL PERSONS ENGAGED IN LAND DISTURBANCE ACTIVITIES SHALL ASSESS THE ADEQUACY OF CONTROL MEASURES AT THE SITE AND IDENTIFY IF CHANGES TO THOSE CONTROL MEASURES ARE NEEDED TO ENSURE THE CONTINUED EFFECTIVE PERFORMANCE OF THE CONTROL MEASURES. ALL CHANGES TO TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES MUST BE INCORPORATED INTO THE STORMWATER MANAGEMENT PLAN.
- TEMPORARY STABILIZATION SHALL BE IMPLEMENTED ON DISTURBED AREAS AND STOCKPILES WHERE GROUND DISTURBING CONSTRUCTION ACTIVITY HAS PERMANENTLY CEASED OR TEMPORARILY CEASED FOR LONGER THAN 14 DAYS.
- 3. FINAL STABILIZATION MUST BE IMPLEMENTED AT ALL APPLICABLE CONSTRUCTION SITES. FINAL STABILIZATION IS ACHIEVED WHEN ALL GROUND DISTURBING ACTIVITIES ARE COMPLETE AND ALL DISTURBED AREAS EITHER HAVE A UNIFORM VEGETATIVE COVER WITH INDIVIDUAL PLANT DENSITY OF 70 PERCENT OF PRE-DISTURBANCE LEVELS ESTABLISHED OR EQUIVALENT PERMANENT ALTERNATIVE STABILIZATION METHOD IS IMPLEMENTED. ALL TEMPORARY SEDIMENT AND EROSION CONTROL MEASURES SHALL BE REMOVED UPON FINAL STABILIZATION AND BEFORE PERMIT CLOSURE.
- 9. ALL PERMANENT STORMWATER MANAGEMENT FACILITIES SHALL BE INSTALLED AS DESIGNED IN THE APPROVED PLANS. ANY PROPOSED CHANGES THAT EFFECT THE DESIGN OR FUNCTION OF PERMANENT STORMWATER MANAGEMENT STRUCTURES MUST BE APPROVED BY THE ECM ADMINISTRATOR PRIOR TO IMPLEMENTATION
- 10. EARTH DISTURBANCES SHALL BE CONDUCTED IN SUCH A MANNER SO AS TO EFFECTIVELY MINIMIZE ACCELERATED SOIL EROSION AND RESULTING SEDIMENTATION. ALL DISTURBANCES SHALL BE DESIGNED, CONSTRUCTED, AND COMPLETED SO THAT THE EXPOSED AREA OF ANY DISTURBED LAND SHALL BE LIMITED TO THE SHORTEST PRACTICAL PERIOD OF TIME. PRE-EXISTING VEGETATION SHALL BE PROTECTED AND MAINTAINED WITHIN 50 HORIZONTAL FEET OF A WATERS OF THE STATE UNLESS SHOWN TO BE INFEASIBLE AND SPECIFICALLY REQUESTED AND APPROVED.
- 11. COMPACTION OF SOIL MUST BE PREVENTED IN AREAS DESIGNATED FOR INFILTRATION CONTROL MEASURES OR WHERE FINAL STABILIZATION WILL BE ACHIEVED BY VEGETATIVE COVER. AREAS DESIGNATED FOR INFILTRATION CONTROL MEASURES SHALL ALSO BE PROTECTED FROM SEDIMENTATION DURING CONSTRUCTION UNTIL FINAL STABILIZATION IS ACHIEVED. IF COMPACTION PREVENTION IS NOT FEASIBLE DUE TO SITE CONSTRAINTS, ALL AREAS DESIGNATED FOR INFILTRATION AND VEGETATION CONTROL MEASURES MUST BE LOOSENED PRIOR TO INSTALLATION OF THE CONTROL MEASURE(S).
- 12. ANY TEMPORARY OR PERMANENT FACILITY DESIGNED AND CONSTRUCTED FOR THE CONVEYANCE OF STORMWATER AROUND, THROUGH, OR FROM THE EARTH DISTURBANCE AREA SHALL BE A STABILIZED CONVEYANCE DESIGNED TO MINIMIZE EROSION AND THE DISCHARGE OF SEDIMENT OFF SITE.
- 13. CONCRETE WASH WATER SHALL BE CONTAINED AND DISPOSED OF IN ACCORDANCE WITH THE SWMP. NO WASH WATER SHALL BE DISCHARGED TO OR ALLOWED TO ENTER STATE WATERS, INCLUDING ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR FACILITIES. CONCRETE WASHOUTS SHALL NOT BE LOCATED IN AN AREA WHERE SHALLOW GROUNDWATER MAY BE PRESENT, OR WITHIN 50 FEET OF A SURFACE WATER BODY, CREEK OR STREAM.
- 14. DURING DEWATERING OPERATIONS OF UNCONTAMINATED GROUND WATER MAY BE DISCHARGED ON SITE, BUT SHALL NOT LEAVE THE SITE IN THE FORM OF SURFACE RUNOFF UNLESS AN APPROVED STATE DEWATERING PERMIT IS IN PLACE.
- 15. EROSION CONTROL BLANKETING OR OTHER PROTECTIVE COVERING SHALL BE USED ON SLOPES STEEPER THAN 3:1.
- 16. CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL WASTES FROM THE CONSTRUCTION SITE FOR DISPOSAL IN ACCORDANCE WITH LOCAL AND STATE REGULATORY REQUIREMENTS. NO CONSTRUCTION DEBRIS, TREE SLASH, BUILDING MATERIAL WASTES OR UNUSED BUILDING MATERIALS SHALL BE BURIED, DUMPED, OR DISCHARGED AT THE SITE.
- 17. WASTE MATERIALS SHALL NOT BE TEMPORARILY PLACED OR STORED IN THE STREET, ALLEY, OR OTHER PUBLIC WAY, UNLESS IN ACCORDANCE WITH AN APPROVED TRAFFIC CONTROL PLAN. CONTROL MEASURES MAY BE REQUIRED BY EL PASO COUNTY ENGINEERING IF DEEMED NECESSARY, BASED ON SPECIFIC CONDITIONS AND CIRCUMSTANCES.
- 18. TRACKING OF SOILS AND CONSTRUCTION DEBRIS OFF-SITE SHALL BE MINIMIZED. MATERIALS TRACKED OFF-SITE SHALL BE CLEANED UP AND PROPERLY DISPOSED OF IMMEDIATELY.
- 19. THE OWNER/DEVELOPER SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL CONSTRUCTION DEBRIS, DIRT, TRASH, ROCK, SEDIMENT, SOIL, AND SAND THAT MAY ACCUMULATE IN ROADS, STORM DRAINS AND OTHER DRAINAGE CONVEYANCE SYSTEMS AND STORMWATER APPURTENANCES AS A RESULT OF SITE DEVELOPMENT.
- 20. THE QUANTITY OF MATERIALS STORED ON THE PROJECT SITE SHALL BE LIMITED, AS MUCH AS PRACTICAL, TO THAT QUANTITY REQUIRED TO PERFORM THE WORK IN AN ORDERLY SEQUENCE. ALL MATERIALS STORED ON-SITE SHALL BE STORED IN A NEAT, ORDERLY MANNER, IN THEIR ORIGINAL CONTAINERS, WITH ORIGINAL MANUFACTURER'S LABELS.
- 21. NO CHEMICAL(S) HAVING THE POTENTIAL TO BE RELEASED IN STORMWATER ARE TO BE STORED OR USED ONSITE UNLESS PERMISSION FOR THE USE OF SUCH CHEMICAL(S) IS GRANTED IN WRITING BY THE ECM ADMINISTRATOR. IN GRANTING APPROVAL FOR THE USE OF SUCH CHEMICAL(S), SPECIAL CONDITIONS AND MONITORING MAY BE REQUIRED.
- 22. BULK STORAGE OF ALLOWED PETROLEUM PRODUCTS OR OTHER ALLOWED LIQUID CHEMICALS IN EXCESS OF 55 GALLONS SHALL REQUIRE ADEQUATE SECONDARY CONTAINMENT PROTECTION TO CONTAIN ALL SPILLS ONSITE AND TO PREVENT ANY SPILLED MATERIALS FROM ENTERING STATE WATERS, ANY SURFACE OR SUBSURFACE STORM DRAINAGE SYSTEM OR OTHER FACILITIES.
- 23. NO PERSON SHALL CAUSE THE IMPEDIMENT OF STORMWATER FLOW IN THE CURB AND GUTTER OR DITCH EXCEPT WITH APPROVED SEDIMENT CONTROL MEASURES.
- 24. OWNER/DEVELOPER AND THEIR AGENTS SHALL COMPLY WITH THE "COLORADO WATER QUALITY CONTROL ACT" (TITLE 25, ARTICLE 8, CRS), AND THE "CLEAN WATER ACT" (33 USC 1344), IN ADDITION TO THE REQUIREMENTS OF THE LAND DEVELOPMENT CODE, DCM VOLUME II AND THE ECM APPENDIX I. ALL APPROPRIATE PERMITS MUST BE OBTAINED BY THE CONTRACTOR PRIOR TO CONSTRUCTION (1041, NPDES, FLOODPLAIN, 404, FUGITIVE DUST, ETC.). IN THE EVENT OF CONFLICTS BETWEEN THESE REQUIREMENTS AND OTHER LAWS, RULES, OR REGULATIONS OF OTHER FEDERAL, STATE, LOCAL, OR COUNTY AGENCIES, THE MOST RESTRICTIVE LAWS, RULES, OR REGULATIONS SHALL APPLY.
- 25. ALL CONSTRUCTION TRAFFIC MUST ENTER/EXIT THE SITE ONLY AT APPROVED CONSTRUCTION ACCESS POINTS.
- 26. PRIOR TO CONSTRUCTION THE PERMITTEE SHALL VERIFY THE LOCATION OF EXISTING UTILITIES.
- 27. A WATER SOURCE SHALL BE AVAILABLE ON SITE DURING EARTHWORK OPERATIONS AND SHALL BE UTILIZED AS REQUIRED TO MINIMIZE DUST FROM EARTHWORK EQUIPMENT AND WIND.
- 28. THE SOILS REPORT FOR THIS SITE HAS BEEN PREPARED BY ENTECH ENGINEERING, INC., TITLED "SOIL, GEOLOGY, AND GEOLOGIC HAZARD STUDY COPPER CHASE AT STERLING RANCH", DATED MARCH 7, 2022, REVISED ______ AND SHALL BE CONSIDERED A PART OF THESE PLANS.
- 29. AT LEAST TEN (10) DAYS PRIOR TO THE ANTICIPATED START OF CONSTRUCTION, FOR PROJECTS THAT WILL DISTURB ONE (1) ACRE OR MORE, THE OWNER OR OPERATOR OF CONSTRUCTION ACTIVITY SHALL SUBMIT A PERMIT APPLICATION FOR STORMWATER DISCHARGE TO THE COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT, WATER QUALITY DIVISION. THE APPLICATION CONTAINS CERTIFICATION OF COMPLETION OF A STORMWATER MANAGEMENT PLAN (SWMP), OF WHICH THIS GRADING AND EROSION CONTROL PLAN MAY BE A PART. FOR INFORMATION OR APPLICATION MATERIALS CONTACT

COLORADO DEPARTMENT OF PUBLIC HEALTH AND ENVIRONMENT WATER QUALITY CONTROL DIVISION WQCD - PERMITS 4300 CHERRY CREEK DRIVE SOUTH DENVER, CO 80246-1530

ATTN: PERMITS UNIT

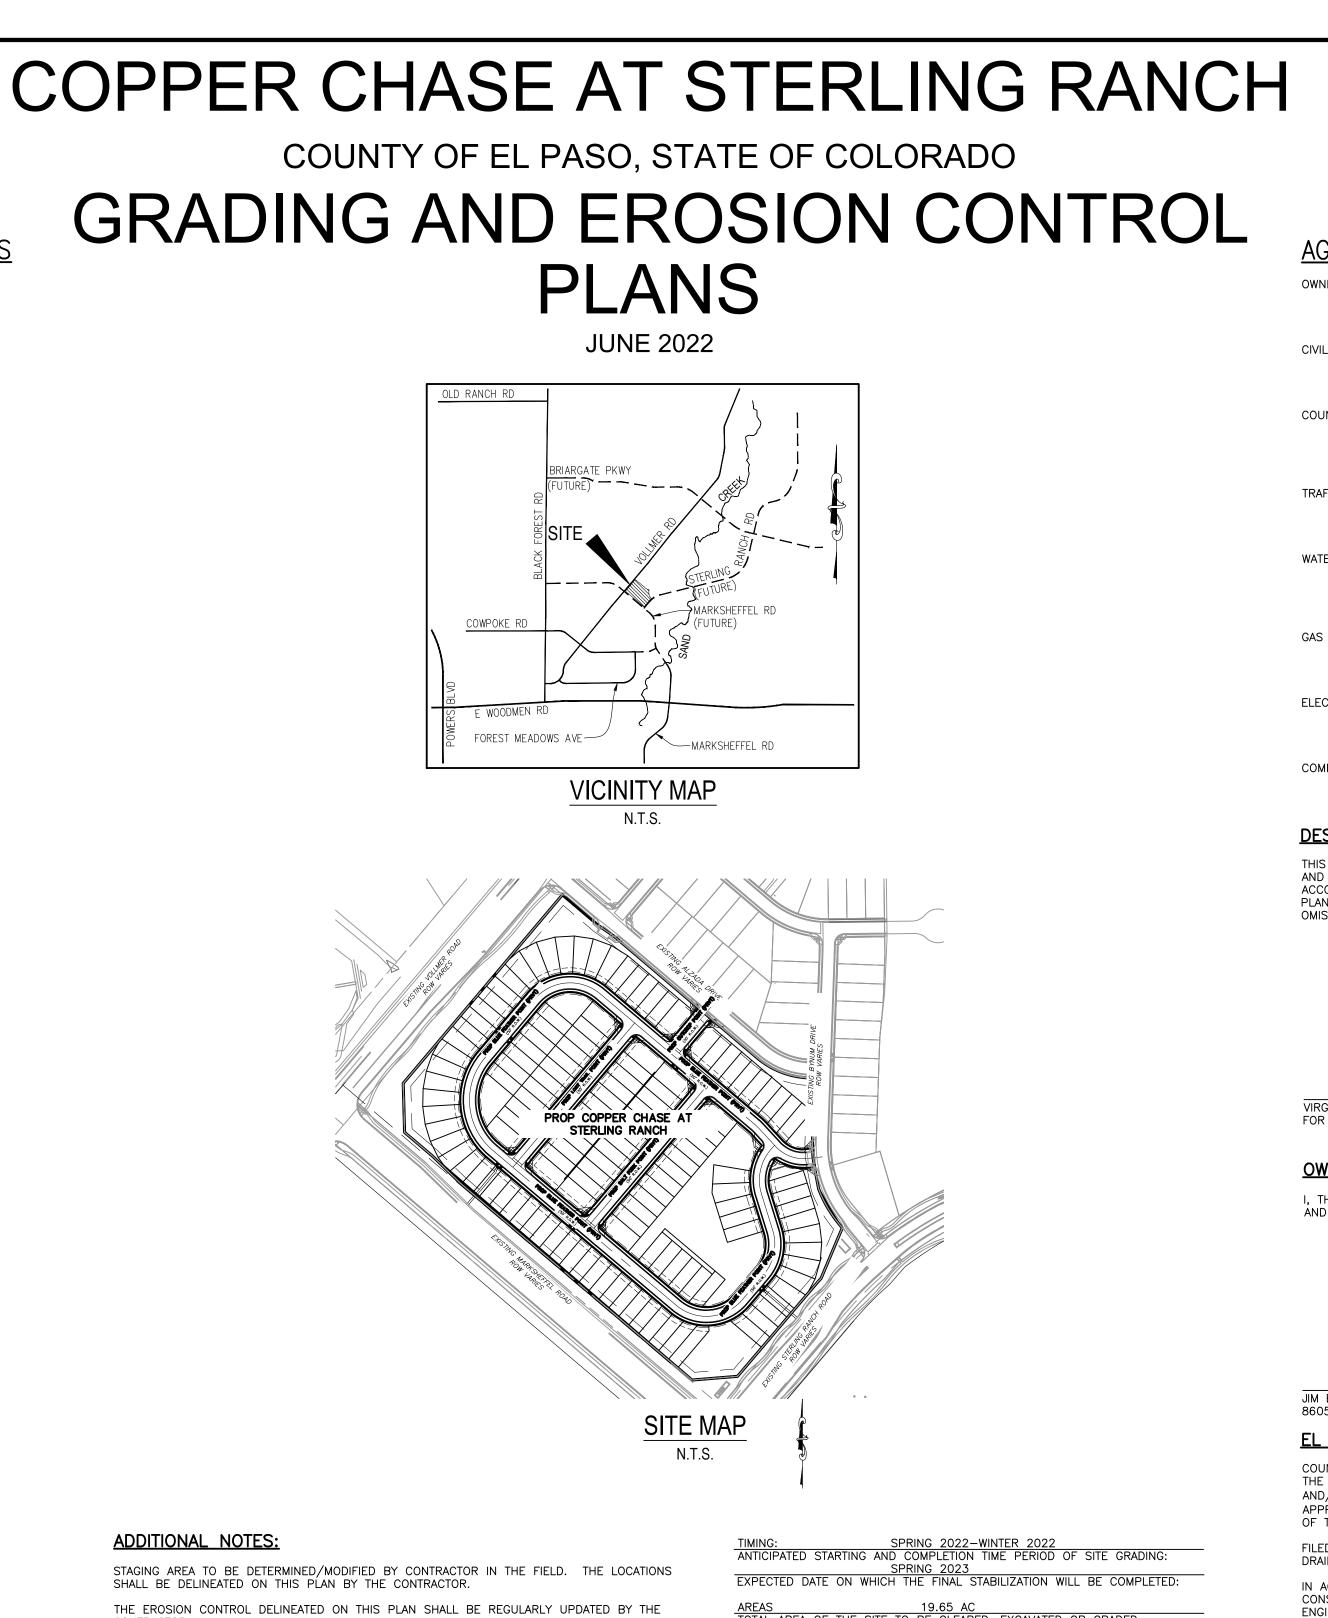

- CONTRACTOR. TEMPORARY SEDIMENT TRAP LOCATIONS WILL BE DETERMINED BY THE CONTRACTOR IN THE
- EXISTING SITE TERRIAN GENERALLY SLOPES FROM NORTH TO SOUTHWEST AT GRADE RATES THAT VARY BETWEEN 2% TO 6%.
- THERE ARE NO BATCH PLANTS ON SITE.
- AREAS LEFT OPEN FOR 30 DAYS OR MORE, OTHER THAN FOR UTILITY AND DRAINAGE CONSTRUCTION SHALL BE SEEDED AND/OR MULCHED.
- NO PORTION OF THIS PROPERTY IS LOCATED WITHIN A DESIGNATED FEMA FLOODPLAIN IN ACCORDANCE WITH FLOOD INSURANCE RATE MAPS (FIRM) 08041C0533G, EFFECTIVE DATE DECEMBER 7, 2018.

EXISTING VEGETATION:

THE SITE ORIGINALLY CONSISTS OF PRAIRIE GRASSES AND SHRUBS. NO OTHER NOTABLE VEGETATION EXISTS. A VISUAL, POST CONSTRUCTION COMPARISON OF GROUND COVERAGE CAN BE MADE WITH ADJACENT, UNDEVELOPED LAND. THE SITE IS PROPOSED FOR A RESIDENTIAL SUBDIVISION. IF THE SUBDIVISION IS NOT COMPLETED, THE ENTIRE SITE SHOULD BE RESEEDED PER EPC SPECIFICATIONS. FOR AREAS OUTSIDE OF THE DEVELOPED LOTS, THE GROUND SHOULD BE RESEEDED PER EPC CRITERIA AS SHOWN ON THE GRADING AND EROSION CONTROL PLAN. THE VEGETATION SHOULD BE VISUALLY INSPECTED TO EXCEED THE AMOUNT OF VEGETATION THAT EXISTS IN NON-DISTURBED AREAS AROUND THE SITE.

AREAS 19.65 AC TOTAL AREA OF THE SITE TO BE CLEARED, EXCAVATED OR GRADED: RECEIVING WATERS: SAND CREEK

ELEVATION = 7023.42

ELEVATION = 7000.40

ELEVATION = 7030.82


BENCHMARKS


1. THE TOP OF AN ALUMINUM SURVEYORS CAP, STAMPED "9853", AT THE SOUTHEAST BOUNDARY CORNER OF BARBARICK SUBDIVISION NORTHING = 411416.273EASTING = 235167.071

- 2. THE TOP OF A RED PLASTIC SURVEYORS CAP, ILLEGIBLE, AT THE NORTHWEST BOUNDARY CORNER OF PAWNEE RANCHEROS SUBDIVISION NORTHING = 410095.404EASTING = 235052.131
- 3. THE TOP OF A RED PLASTIC SURVEYORS CAP, STAMPED "38141", AT THE SOUTHWEST BOUNDARY CORNER OF BARBARICK SUBDISION NORTHING = 411399.962FASTING = 233849.817

PCD FILING NO.: PUDSP222

		I		
COLORADO SPRINGS, CO 80920 JIM BYERS (719) 602–5192 M & S CIVIL CONSULTANTS, INC. 212 N WAHSATCH AVENUE, SUITE COLORADO SPRINGS, CO 80903 VIRGIL A. SANCHEZ P.E. (719) 95 EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT 2880 INTERNATIONAL CIRCLE, SUIT COLORADO SPRINGS, CO 80910 GILBERT LAFORCE (719)–520–794 EL PASO COUNTY PUBLIC SERVICE 3275 AKERS DRIVE COLORADO SPRINGS, CO 80922 JENNIFER IRVINE, P.E. (719) 520- STERLING RANCH METRO DISTRICT JDS-HYDRO CONSULTANTS 545 E. PIKES PEAK AVE., SUITE S COLORADO SPRINGS, CO 80903	305 55–5485 TE 110 45 ES & TRANS. DEPT. –6460 ENGINEERS	COPPER CHASE AT STERLING RANCH	CRADING & EROSION CONTROL TITLE SHEET PROJECT NO. 09-014 SCALE: DATE: 06/09/2022 PROJECT NO. 09-014 SCALE: DATE: 06/09/2022 DESIGNED BY: CWW N/A N/A DRAWN BY: CWW N/A SHEET 1 OF 6 CHECKED BY: CWW VA SHEET 06/09/2022	BY: VAS N/A Straight N/A
COLORADO SPRINGS UTILITIES 7710 DURANT DR. COLORADO SPRINGS, CO 80947		CTE 205	20 80903	
MOUNTAIN VIEW ELECTRIC 11140 E. WOODMEN ROAD FALCON, CO 80831			134101 AVE. 2 SPRINGS, C	
QWEST COMMUNICATIONS (U.N.C.C. LOCATORS) (800) 922–			212 IN. WAF COLORADC PHONE: 719	
STATEMENT:		۱.		. I
ESTABLISHED BY THE COUNTY FOR OUT THE FOR ANY LIABILITY CAUSED BY THE REPARING THIS PLAN.	GRADING AND EROSION CONTROL		CIVIL CONSULTANTS	
			ý ý	
VE READ AND WILL COMPLY WITH THE ES VP COMMUNITY DEVELOPMENT ADO SPRINGS, CO 80910 VIDED ONLY FOR GENERAL CONFORM BIBLE FOR THE ACCURACY AND ADEC HALL BE CONFIRMED AT THE JOB S	DATE MANCE WITH COUNTY DESIGN CRITERIA. QUACY OF THE DESIGN, DIMENSIONS, ITE. THE COUNTY THROUGH THE	VIRGIL A. SANCHEZ, COLORADO P.E. NO. 37160	INC.	
OLUMES 1 AND 2, AND ENGINEERIN CTION 1.12, THESE CONSTRUCTION OF 2 YEARS FROM THE DATE SIGN HAS NOT STARTED WITHIN THOSE 2 AL, INCLUDING PAYMENT OF REVIEW ECTORS DISCRETION. MINISTRATOR ON CONTROL PLAN ON CONTROL DETAILS ON CONTROL DETAILS ON CONTROL DETAILS ON CONTROL DETAILS	G CRITERIA MANUAL AS AMENDED. DOCUMENTS WILL BE VALID FOR IED BY THE EL PASO COUNTY YEARS, THE PLANS WILL NEED TO FEES AT THE PLANNING AND DATE FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES FOR BURIED UTILITY INFORMATION 48 HRS BEFORE YOU DIG	REVISIONS: 0. DATE: BY: DESCRIPTION: APRV'D. BY: DATE:	THE ENGINEER PREPARING THESE PLANS WILL NOT BE RESPONSIBLE, OR LIA UNAUTHORIZED CHANGES TO OR USES OF THESE PLANS. ALL CHANGES TO MILET BE IN WRITHING AND MILET BE ADDOVIED BY THE DEPENDED OF THESE THE	MUSI BE IN WRITING AND MUSI BE APPROVED BY THE PREPARER OF THESE P
	8605 EXPLORER DRIVE, SUITE 25 COLORADO SPRINGS, CO 80920 JIM BYERS (719) 602–5192 M & S CIVIL CONSULTANTS, INC. 212 N WAHSATCH AVENUE, SUITE COLORADO SPRINGS, CO 80903 VIRGIL A. SANCHEZ P.E. (719) 95 EL PASO COUNTY PLANNING AND COMMUNITY DEVELOPMENT 2880 INTERNATIONAL CIRCLE, SUIT COLORADO SPRINGS, CO 80910 GILBERT LAFORCE (719)–520–79/ EL PASO COUNTY PUBLIC SERVICE 3275 AKERS DRIVE COLORADO SPRINGS, CO 80922 JENNIFER IRVINE, P.E. (719) 520 STERLING RANCH METRO DISTRICT JDS-HYDRO CONSULTANTS 545 E. PIKES PEAK AVE., SUITE S COLORADO SPRINGS, CO 80903 JOHN MCGINN (719) 668–8769 COLORADO SPRINGS, CO 80947 TIM WENDT (719) 668–3556 MOUNTAIN VIEW ELECTRIC 11140 E. WOODMEN ROAD FALCON, CO 80831 (719) 495–2283 QWEST COMMUNICATIONS (U.N.C.C. LOCATORS) (800) 922– AT&T (LOCATORS) (719) 635–363 STATEMENT: CONTROL PLAN WAS PREPARED UNDD T OF MY KNOWLEDGE AND BELIEF. ESTABLISHED BY THE COUNTY FOR 1TY FOR ANY LIABILITY CAUSED BY IN REPARING THIS PLAN.	BOD ENHORER DEVICE SUITE 250 COLORADO SPRINSS DO BODOS VIRGL A SANCHEZ P.E. (719) 535–5483 E. LPASO COUNSULTATIS, NC. 212 M WHEARCH AVENUE, SUITE 305 COLORADO SPRINSS DO BODOS VIRGL A SANCHEZ P.E. (719) 535–5483 E. LPASO COUNSULTATIS AND COMMUNITY DEVELOPMENT COLORADO SPRINSS, CO BODOS USERIA CARANTA META DISTRUCT FROMERER USERIANO SANCHEZ P.E. (719) 520–6400 SUBERT LATORACE (719) 520–6400 SUBERT LATORACE (719) 520–6400 SUBERT LATORACE (719) 520–6400 SUBERT LATORACE (719) 520–5400 SUBERT COMMUNICATIONS (710) UBERT DET COLORADO SPRINSS UITTES TOTOR VIRTUE DET COLORADO SPRINSS UITTES TOTOR VIR		

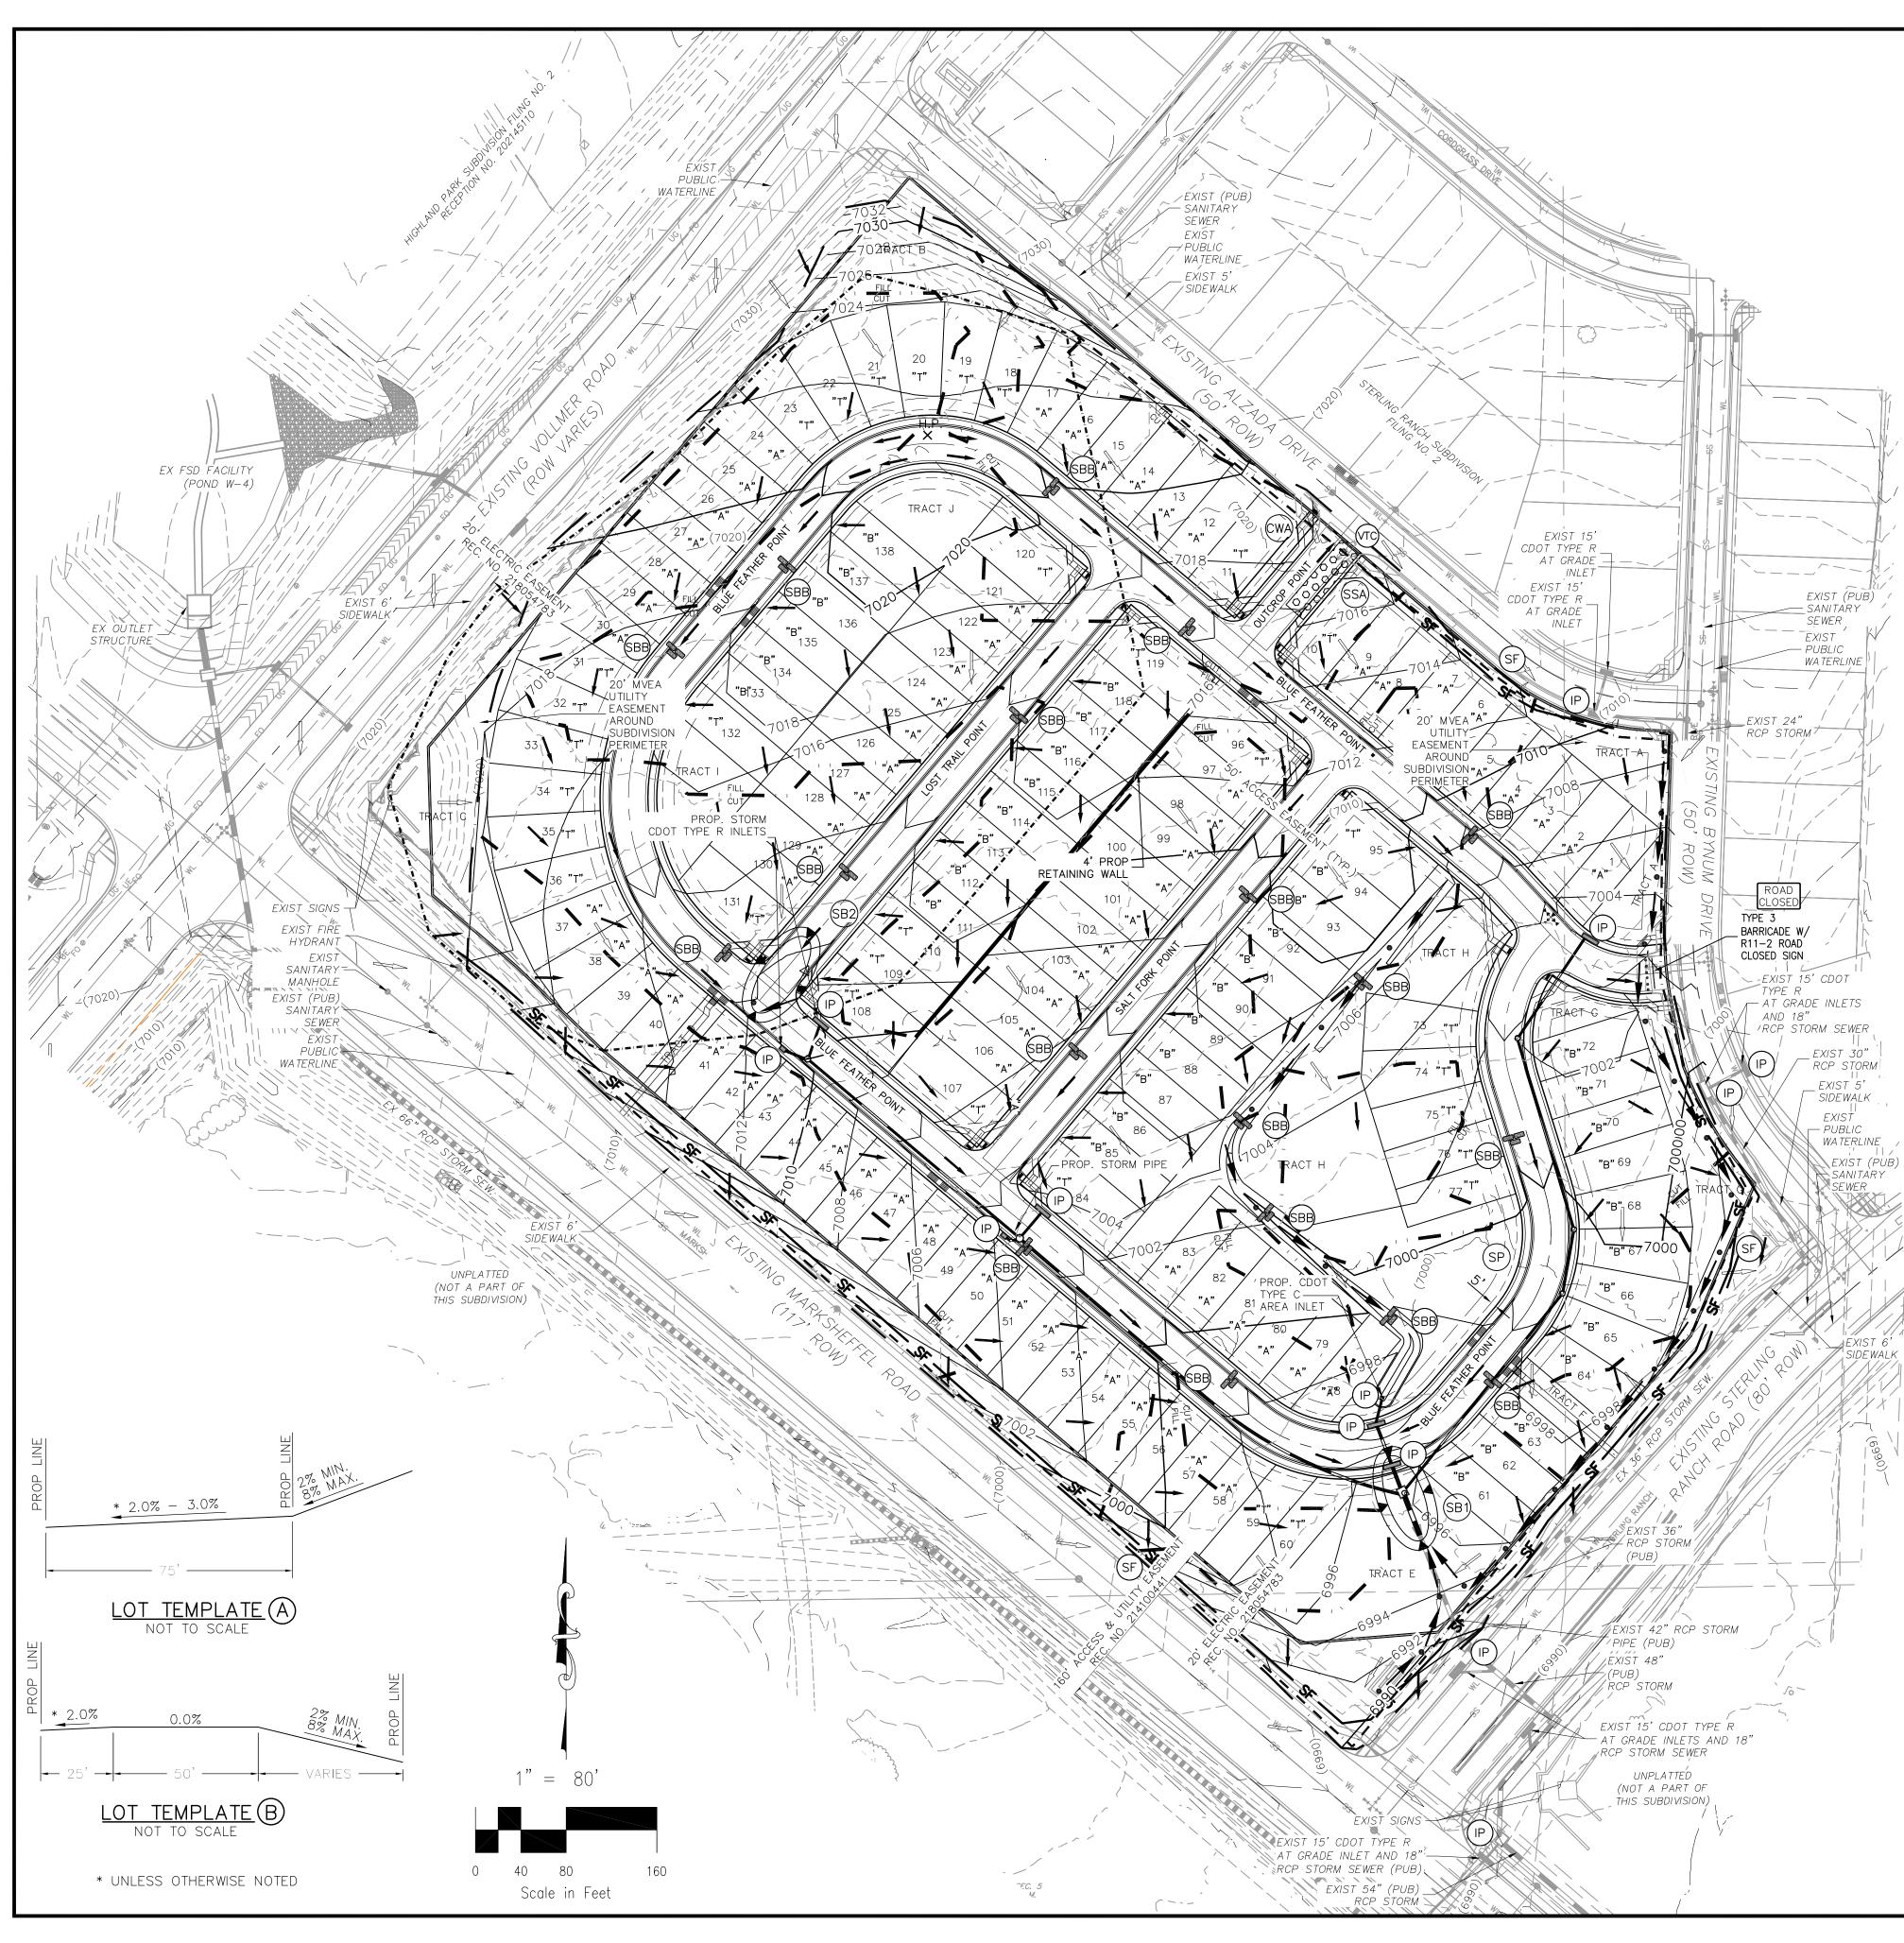

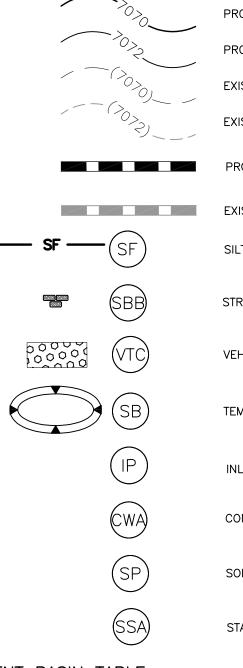

SEDIMENT BASIN TABLE:

SEDIMENT BASIN NO.	UPSTREAM DRAINAGE AREA AC.	BASIN WIDTH FT.
SB1 SB2	12 7	47.25 64

ADDITIONAL NOTES:

- 1. STAGING AREA TO BE DETERMINED BY CONTRAC
- 2. THE EROSION CONTROL DELINEATED ON THIS
- 3. THE CONTRACTOR SHALL OBTAIN A COPY OF OPERATIONS.
- 4. THE CONTRACTOR SHALL PROVIDE SUFFICIENT E OCCUR TO MAKE SUFFICIENT TIE IN BETWEEN T THIS PLAN.
- 5. EXISTING VEGETATION CONSISTS OF SPARSE NA WITH ADJACENT, UNDEVELOPED LAND.

NARRATIVE NOTES:

- PUBLIC WATERLINE 1. LOCATION OF STOCKPILES SHALL BE DETERMIN' INDICATED ON THE SITE MAP.
- 2. THE EXACT LOCATION FOR THE STABILIZED STA SEWER FIELD BY THE CONTRACTOR. PLAN SHALL BE U 3. FINAL STABILIZATION SHALL BE COMPLETED AT
 - BOUNDARY/LIMITS OF DISTURBANCE AREA SHAI
 - \downarrow 4. NO PORTION OF THE PROPOSED COPPER CHA 5. EROSION CONTROL BLANKET SHALL BE USED

5' SIDE LOT ESMT. (BOTH SIDES (NOT SHOWN, WILL BE INCLUDED ON F

<u>NOTES:</u>

* 10' FRONT LOT EASEMENT BEHIND P.U.E & 5' SIDE LOT EASEMENT BEHIND P.U.E. (WHERE APPLICABLE) SHOWN. 10' INTERIOR SIDE & REAR LOT EASEMENTS WILL BE SHOWN ON FINAL PLAT. (SEE DETAIL TO RIGHT)

<u>LEGEND</u>						02
SITE BOUNDARY	· ••••• (CUT/FILL LINE	RANCH	PLAN		GR02
PROP MAJ CONT	• • — L	LIMITS OF DISTURBANCE/CONSTRUCTION	RAN)22	
● →		TEMPORARY DRAINAGE SWALE	9	ROI	09/202	OF 6
EXIST MAJ CONT		SEDIMENT BASIN TRIBUTARY AREA	RLIN	CONTROI	06/0	5
EXIST MIN CONT		PROPOSED PRIVATE UTILITY EASEMENT	STERLING		DATE:	SHEET
PROP STORM SEWER PIPE			AT (EROSION		
EXISTING STORM SEWER PIPE		EXISTING FIRE HYDRANT EXISTING SANITARY MANHOLE		SOS	NLE:	/A ICAL: /A
SILT FENCE-INITIAL	<u> </u>	EXISTING SIGN	CHASE		SCALE:	VERTICAL: N/A N/A
		EXISTING WATER VALVE PROPOSED INLET	CF	8		
STRAW BALE BARRIER — INTERIM		EXISTING FLOW DIRECTION ARROW	DER	GRADING	09-014	CVW CVW VAS
VEHICLE TRACKING CONTROL-INITIAL	- F	PROPOSED FLOW DIRECTION	COPPER	RAD	1 1	BY: BY: BY:
TEMPORARY SEDIMENT BASIN–INITIAL	× 4	ARROW FLARED END SECTION	Ö	0	PROJECT NO.	DESIGNED DRAWN BY CHECKED
	H.P. X	HIGH POINT			PRO	DESIGNI DRAWN CHECKE
INLET PROTECTION-FINAL	~	LOW POINT	205	cuc 0903		
CONCRETE WASHOUT-INITIAL		TYPE A LOT TYPE B LOT	1 1 1	, CO 8		
	_	TRANSITION LOT		1.01 AV 2.5485 5.5485		
SOIL STOCKPILE – INITIAL	•	LOT NUMBER	- V JI I V /	719.95		
STABILIZED STAGING AREA – INITIAL				212 N. WARDAICH AVE., 315 303 COLORADO SPRINGS, CO 80903 PHONE: 719.955.5485		
	SPILLWAY HOLE					ING ING
Г. FT. FT. C.F.		IN STANDPIPE			Ŷ	ITS,
	11 25/32 18 1	2 1 1				CONSULTANT
						sur
CONTRACTOR IN THE FIELD. THE LOCATIONS SHAL THIS PLAN SHALL BE REGULARLY UPDATED BY T		ON THIS PLAN BY THE CONTRACTOR.				
Y OF THE GEOTECHNICAL ENGINEERING REPORT A		ONSITE DURING ALL EARTHWORK				
ICIENT BUFFER BETWEEN THE LIMITS OF DISTURI TWEEN THE PROPOSED GRADE AND EXISTING (CIVIL
RSE NATIVE GRASSES AND SHRUBS. A VISUAL, PC					Č,	
				FOR AND ON BEHALF OF	JIVIL	
ETERMINED BY CONTRACTOR. ALL STOCKPILES SHA	LL REMAIN WITHIN	THE CONSTRUCTION BOUNDARIES AS	160	FOR A BEHALI	M&S (CONSL	
ZED STAGING AREA, STORAGE EQUIPMENT AND TEN	IPORARY DISPOSAL	. AREAS SHALL BE DETERMINED IN THE	NO. 37			
LL BE UPDATED BY CONTRACTOR UPON DETERMIN TED AT THE END OF THE CONSTRUCTION ACTIVITIE	ATION OF EXACT L	OCATION.	Р. Г.			
EA SHALL BE RESEEDED WITH NATIVE SEEDING. ER CHASE AT STERLING RANCH SITE LIES WITH A	FEMA EFFECTIVE 1	00-YR FLOODPLAIN.				
USED ON SLOPES GREATER THAN 4:1.			COLORADO			
	FROM P.L. (NOT SH INCLUDED ON FIN		SANCHEZ,			
SIDES OF P.L.)	10' SIDE LOT BEHIND P.U (5' FROM F	J.E.	VIRGIL A.			
	WHERE NO P.	.U.E.)				
	5 ' P.U.E		DATE:			: PLANS WILL NOT BE RESPONSIBLE, OR LIABLE FOR, USES OF THESE PLANS. ALL CHANGES TO THE PLANS BE APPROVED BY THE PREPARER OF THESE PLANS.
			BY:			LIABLE TO THI ESE PL
R			APRV'D.			-E, OR ANGES OF TH
			AF			ONSIBL
						E RESP ANS. /
						NOT B SE PL/ BY TH
						S WILL OF THE PROVED
						: PLANS USES - BE APF
10' BEHIND P.U.E.			PTION:			
		FOR LOCATING & MARKING	DESCRIPTION			⊃ARING NGES 3 AND
		GAS, ELECTRIC, WATER &	BY: D			THE ENGINEER PREPARING THESE UNAUTHORIZED CHANGES TO OR MUST BE IN WRITING AND MUST
ROAD FRONTAGE		TELEPHONE LINES				NGINEE THORIZE BE IN
TYPICAL LOT WITH MVEA EASM (UNLESS OTHERWISE N		FOR BURIED UTILITY INFORMATION	REVISIONS: IO. DATE:			THE E UNAU1 MUST
		CALL 1-800-922-1987	REV NO.			CAUTION

EC-2	Temporary and Permanent Seeding (TS/PS)	Tempor
soil amendme	ents and rototill them into the soil to a depth of 6 inches or more.	Seeding dates f
Topsoil shoul water-holding The rooting d minimum, the	d be salvaged during grading operations for use and spread on areas to be revegetated later. d be viewed as an important resource to be utilized for vegetation establishment, due to its g capacity, structure, texture, organic matter content, biological activity, and nutrient content. epth of most native grasses in the semi-arid Denver metropolitan area is 6 to 18 inches. At a e upper 6 inches of topsoil should be stripped, stockpiled, and ultimately respread across l be revegetated.	in the spring fr freezes. If the appropriate see Table T
medium. Org conducive to j testing, which	l is not available, subsoils should be amended to provide an appropriate plant-growth ganic matter, such as well digested compost, can be added to improve soil characteristics plant growth. Other treatments can be used to adjust soil pH conditions when needed. Soil a is typically inexpensive, should be completed to determine and optimize the types and mendments that are required.	1
compost to th	ed ground surface is compacted, rip or rototill the surface prior to placing topsoil. If adding e existing soil surface, rototilling is necessary. Surface roughening will assist in placement psoil layer on steeper slopes, and allow infiltration and root penetration to greater depth.	4
nor compacte	ng, the soil surface should be rough and the seedbed should be firm, but neither too loose d. The upper layer of soil should be in a condition suitable for seeding at the proper depth e to plant growth. Seed-to-soil contact is the key to good germination.	7
Seed Mix fo	or Temporary Vegetation	
landscaped or appropriate for metropolitan a recommendat	mporary vegetative cover on disturbed areas which will not be paved, built upon, or fully r worked for an extended period (typically 30 days or more), plant an annual grass or the time of planting and mulch the planted areas. Annual grasses suitable for the Denver area are listed in Table TS/PS-1. These are to be considered only as general ions when specific design guidance for a particular site is not available. Local governments sity seed mixes appropriate for their jurisdiction.	1 a
Seed Mix fo	r Permanent Revegetation	
be established reaching final jurisdiction sh specific recom season listed i	egetative cover on disturbed areas that have reached final grade, a perennial grass mix should d. Permanent seeding should be performed promptly (typically within 14 days) after l grade. Each site will have different characteristics and a landscape professional or the local hould be contacted to determine the most suitable seed mix for a specific site. In lieu of a nmendation, one of the perennial grass mixes appropriate for site conditions and growth in Table TS/PS-2 can be used. The pure live seed (PLS) rates of application recommended s are considered to be absolute minimum rates for seed applied using proper drill-seeding	b c
<i>nauseosus</i>), for added to the up planting root a plains cottony	wildlife habitat or landscape diversity, shrubs such as rubber rabbitbrush (<i>Chrysothamnus</i> ourwing saltbush (<i>Atriplex canescens</i>) and skunkbrush sumac (<i>Rhus trilobata</i>) could be upland seedmixes at 0.25, 0.5 and 1 pound PLS/acre, respectively. In riparian zones, stock of such species as American plum (<i>Prunus americana</i>), woods rose (<i>Rosa woodsii</i>), wood (<i>Populus sargentii</i>), and willow (<i>Populus spp.</i>) may be considered. On non-topsoiled a legume such as Ladak alfalfa at 1 pound PLS/acre can be included as a source of nitrogen	

TS/PS-2

for perennial grasses.

Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

Temporary and Permanent Seeding (TS/PS) EC-2

Table TS/PS-3. Seeding Dates for Annual and Perennial Grasses

	(Numbers in	l Grasses table reference Table TS/PS-1)	Perennia	l Grasses
Seeding Dates	Warm	Cool	Warm	Cool
January 1–March 15			✓	✓
March 16–April 30	4	1,2,3	✓	~
May 1–May 15	4		✓	
May 16–June 30	4,5,6,7			
July 1–July 15	5,6,7			
July 16–August 31				
September 1–September 30		8,9,10,11		
October 1–December 31			✓	✓

Mulch

Cover seeded areas with mulch or an appropriate rolled erosion control product to promote establishment of vegetation. Anchor mulch by crimping, netting or use of a non-toxic tackifier. See the Mulching BMP Fact Sheet for additional guidance.

Maintenance and Removal

Monitor and observe seeded areas to identify areas of poor growth or areas that fail to germinate. Reseed and mulch these areas, as needed.

An area that has been permanently seeded should have a good stand of vegetation within one growing season if irrigated and within three growing seasons without irrigation in Colorado. Reseed portions of the site that fail to germinate or remain bare after the first growing season.

Seeded areas may require irrigation, particularly during extended dry periods. Targeted weed control may also be necessary.

Protect seeded areas from construction equipment and vehicle access.

TS/PS-6

Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

Temporary and Permanent Seeding (TS/PS)

for the highest success probability of perennial species along the Front Range are generally rom April through early May and in the fall after the first of September until the ground area is irrigated, seeding may occur in summer months, as well. See Table TS/PS-3 for eding dates.

FS/PS-1. Minimum Drill Seeding Rates for Various Temporary Annual Grasses

Species ^a (Common name)	Growth Season ^b	Pounds of Pure Live Seed (PLS)/acre [°]	Planting Depth (inches)
1. Oats	Cool	35 - 50	1 - 2
2. Spring wheat	Cool	25 - 35	1 - 2
3. Spring barley	Cool	25 - 35	1 - 2
4. Annual ryegrass	Cool	10 - 15	1/2
5. Millet	Warm	3 - 15	1/2 - 3/4
6. Sudangrass	Warm	5–10	1/2 - 3/4
7. Sorghum	Warm	5–10	1/2 - 3/4
8. Winter wheat	Cool	20–35	1 - 2
9. Winter barley	Cool	20–35	1 - 2
10. Winter rye	Cool	20–35	1 - 2
11. Triticale	Cool	25–40	1 - 2
^a Successful seeding of and usually produce enough of	lead-plant resi	due to provide protect	ion from

wind and water erosion for an additional year. This assumes that the cover is not disturbed or mowed closer than 8 inches. Hydraulic seeding may be substituted for drilling only where slopes are steeper than 3:1 or where access limitations exist. When hydraulic seeding is used, hydraulic mulching should be applied as a separate operation, when practical, to prevent the seeds from being encapsulated in the mulch.

- See Table TS/PS-3 for seeding dates. Irrigation, if consistently applied, may extend the use of cool season species during the summer months.
- Seeding rates should be doubled if seed is broadcast, or increased by 50 percent if done using a Brillion Drill or by hydraulic seeding.

June 2012

Urban Drainage and Flood Control District TS/PS-3 Urban Storm Drainage Criteria Manual Volume 3

Mulching (MU)

Description

Mulching consists of evenly applying straw, hay, shredded wood mulch, rock, bark or compost to disturbed soils and securing the mulch by crimping, tackifiers, netting or other measures. Mulching hel reduce erosion by protecting bare soil from rainfall impact, increasing infiltration, and reducing runoff. Although often applied in conjunction with temporary or permanent seeding, it can also be used for temporary stabilization of areas that cannot be reseeded due to seasonal constraints.

Mulch can be applied either using standard mechanical dry application methods or using hydromulching equipment that hydraulically applies a slurry of water, wood fiber mulch, and often a tackifier.

Appropriate Uses

Use mulch in conjunction with seeding to help protect the seedbed and stabilize the soil. Mulch can also be used as a temporary cover on low to mild slopes to help temporarily stabilize disturbed areas where growing season constraints prevent effective reseeding. Disturbed areas should be properly mulched and tacked, or seeded, mulched and tacked promptly after final grade is reached (typically within no longer than 14 days) on portions of the site not otherwise permanently stabilized.

Standard dry mulching is encouraged in most jurisdictions; however, hydromulching may not be allowed in certain jurisdictions or may not be allowed near waterways.

Do not apply mulch during windy conditions.

Design and Installation

Prior to mulching, surface-roughen areas by rolling with a crimping or punching type roller or by track walking. Track walking should only be used where other methods are impractical because track walking with heavy equipment typically compacts the soil.

A variety of mulches can be used effectively at construction sites. Consider the following:

> Urban Drainage and Flood Control Urban Storm Drainage Criteria Manual Volume 3

June 2012

EC-2



Photograph MU-1. An area that was recently seeded, mulched, and crimped.

Mulch	
Functions	
Erosion Control	Yes
Sediment Control	Moderate
Site/Material Management	No

Temporary and Permanent Seeding (TS/PS) EC-2

Table TS/PS-2. Minimum Drill Seeding Rates for Perennial Grasses

Common ^a Name	Botanical Name	Growth Season ^b	Growth Form	Seeds/ Pound	Pounds of PLS/acre
Alakali Soil Seed Mix					
Alkali sacaton	Sporobolus airoides	Cool	Bunch	1,750,000	0.25
Basin wildrye	Elymus cinereus	Cool	Bunch	165,000	2.5
Sodar streambank wheatgrass	Agropyron riparium 'Sodar'	Cool	Sod	170,000	2.5
Jose tall wheatgrass	Agropyron elongatum 'Jose'	Cool	Bunch	79,000	7.0
Arriba western wheatgrass	Agropyron smithii 'Arriba'	Cool	Sod	110,000	5.5
Total					17.75
Fertile Loamy Soil Seed Mix	i .				
Ephriam crested wheatgrass	Agropyron cristatum 'Ephriam'	Cool	Sod	175,000	2.0
Dural hard fescue	Festuca ovina 'duriuscula'	Cool	Bunch	565,000	1.0
Lincoln smooth brome	Bromus inermis leyss 'Lincoln'	Cool	Sod	130,000	3.0
Sodar streambank wheatgrass	Agropyron riparium 'Sodar'	Cool	Sod	170,000	2.5
Arriba western wheatgrass	Agropyron smithii 'Arriba'	Cool	Sod	110,000	7.0
Total		1			15.5
High Water Table Soil Seed Mix	ι.				
Meadow foxtail	Alopecurus pratensis	Cool	Sod	900,000	0.5
Redtop	Agrostis alba	Warm	Open sod	5,000,000	0.25
Reed canarygrass	Phalaris arundinacea	Cool	Sod	68,000	0.5
Lincoln smooth brome	Bromus inermis leyss 'Lincoln'	Cool	Sod	130,000	3.0
Pathfinder switchgrass	Panicum virgatum 'Pathfinder'	Warm	Sod	389,000	1.0
Alkar tall wheatgrass	Agropyron elongatum 'Alkar'	Cool	Bunch	79,000	5.5
Total					10.75
Transition Turf Seed Mix ^c					
Ruebens Canadian bluegrass	Poa compressa 'Ruebens'	Cool	Sod	2,500,000	0.5
Dural hard fescue	Festuca ovina 'duriuscula'	Cool	Bunch	565,000	1.0
Citation perennial ryegrass	Lolium perenne 'Citation'	Cool	Sod	247,000	3.0
Lincoln smooth brome	Bromus inermis leyss 'Lincoln'	Cool	Sod	130,000	3.0
Total					7.5

Sandy Soil S Blue grama Camper little Prairie sandr Sand dropsee Vaughn sideo Arriba wester Heavy Clay, Ephriam cres Oahe Interme Vaughn sideo Lincoln smoo Arriba weste Total ⁹ See Table TS/PS-3 for seeding dates. If site is to be irrigated, the transition turf seed rates should be doubled. ¹ Crested wheatgrass should not be used on slopes steeper than 6H to 1V.

Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

EC-4

TS/PS-4

Mulching (MU)

- Clean, weed-free and seed-free cereal grain straw should be applied evenly at a rate of 2 tons per acre and must be tacked or fastened by a method suitable for the condition of the site. Straw mulch must be anchored (and not merely placed) on the surface. This can be accomplished mechanically by crimping or with the aid of tackifiers or nets. Anchoring with a crimping implement is preferred, and is the recommended method for areas flatter than 3:1. Mechanical crimpers must be capable of tucking the long mulch fibers into the soil to a depth of 3 inches without cutting them. An agricultural disk, while not an ideal substitute, may work if the disk blades are dull or blunted and set vertically; however, the frame may have to be weighted to afford proper soil penetration.
- Grass hay may be used in place of straw; however, because hay is comprised of the entire plant including seed, mulching with hay may seed the site with non-native grass species which might in turn out-compete the native seed. Alternatively, native species of grass hay may be purchased, but can be difficult to find and are more expensive than straw. Purchasing and utilizing a certified weed-free straw is an easier and less costly mulching method. When using grass hay, follow the same guidelines as for straw (provided above).
- On small areas sheltered from the wind and heavy runoff, spraying a tackifier on the mulch is satisfactory for holding it in place. For steep slopes and special situations where greater control is needed, erosion control blankets anchored with stakes should be used instead of mulch.
- Hydraulic mulching consists of wood cellulose fibers mixed with water and a tackifying agent and should be applied at a rate of no less than 1,500 pounds per acre (1,425 lbs of fibers mixed with at least 75 lbs of tackifier) with a hydraulic mulcher. For steeper slopes, up to 2000 pounds per acre may be required for effective hydroseeding. Hydromulch typically requires up to 24 hours to dry; therefore, it should not be applied immediately prior to inclement weather. Application to roads, waterways and existing vegetation should be avoided.
- Erosion control mats, blankets, or nets are recommended to help stabilize steep slopes (generally 3:1 and steeper) and waterways. Depending on the product, these may be used alone or in conjunction with grass or straw mulch. Normally, use of these products will be restricted to relatively small areas. Biodegradable mats made of straw and jute, straw-coconut, coconut fiber, or excelsior can be used instead of mulch. (See the ECM/TRM BMP for more information.)
- Some tackifiers or binders may be used to anchor mulch. Check with the local jurisdiction for allowed tackifiers. Manufacturer's recommendations should be followed at all times. (See the Soil Binder BMP for more information on general types of tackifiers.)
- Rock can also be used as mulch. It provides protection of exposed soils to wind and water erosion and allows infiltration of precipitation. An aggregate base course can be spread on disturbed areas for temporary or permanent stabilization. The rock mulch layer should be thick enough to provide full coverage of exposed soil on the area it is applied.

Maintenance and Removal

After mulching, the bare ground surface should not be more than 10 percent exposed. Reapply mulch, as needed, to cover bare areas.

MU-2

Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 June 2012

June 2012

Temporary and Permanent Seeding (TS/PS)

Table TS/PS-2. Minimum Drill Seeding Rates for Perennial Grasses (cont.)


Common Name	Botanical Name	Growth Season ^b	Growth Form	Seeds/ Pound	Pounds of PLS/acre
Seed Mix	· · ·				
	Bouteloua gracilis	Warm	Sod-forming bunchgrass	825,000	0.5
le bluestem	Schizachyrium scoparium 'Camper'	Warm	Bunch	240,000	1.0
lreed	Calamovilfa longifolia	Warm	Open sod	274,000	1.0
eed	Sporobolus cryptandrus	Cool	Bunch	5,298,000	0.25
eoats grama	Bouteloua curtipendula 'Vaughn'	Warm	Sod	191,000	2.0
ern wheatgrass	Agropyron smithii 'Arriba'	Cool	Sod	110,000	5.5
Total					10.25
y, Rocky Foothill Seed	Mix	1			
ested wheatgrass ^d	Agropyron cristatum 'Ephriam'	Cool	Sod	175,000	1.5
nediate wheatgrass	Agropyron intermedium 'Oahe'	Cool	Sod	115,000	5.5
eoats grama ^e	Bouteloua curtipendula 'Vaughn'	Warm	Sod	191,000	2.0
ooth brome	Bromus inermis leyss 'Lincoln'	Cool	Sod	130,000	3.0
ern wheatgrass	Agropyron smithii 'Arriba'	Cool	Sod	110,000	5.5
					17.5

All of the above seeding mixes and rates are based on drill seeding followed by crimped straw mulch. These rates should be doubled if seed is broadcast and should be increased by 50 percent if the seeding is done using a Brillion Drill or is applied through hydraulic seeding. Hydraulic seeding may be substituted for drilling only where slopes are steeper than 3:1. If hydraulic seeding is used, hydraulic mulching should be done as a separate operation.


² Can substitute 0.5 lbs PLS of blue grama for the 2.0 lbs PLS of Vaughn sideoats grama.

Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3 TS/PS-5

EC-2

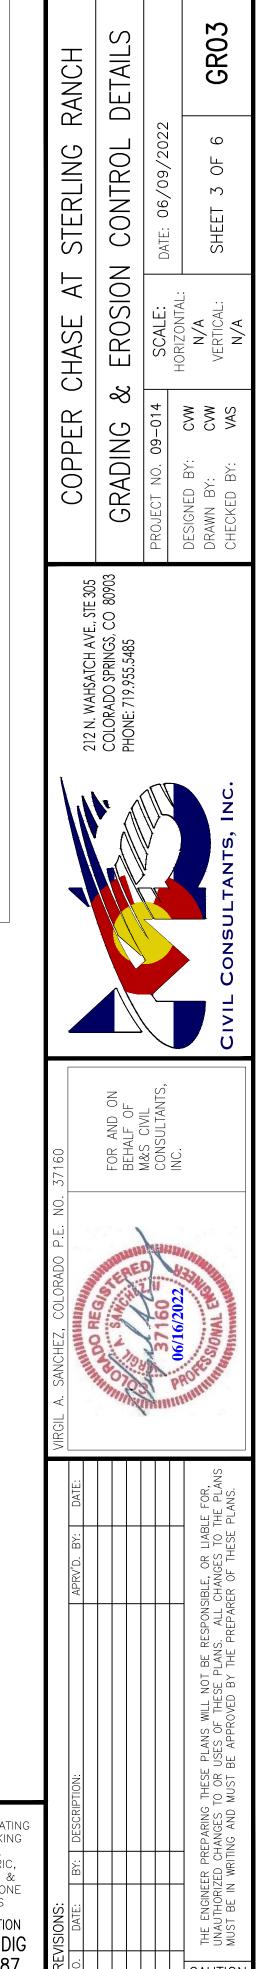



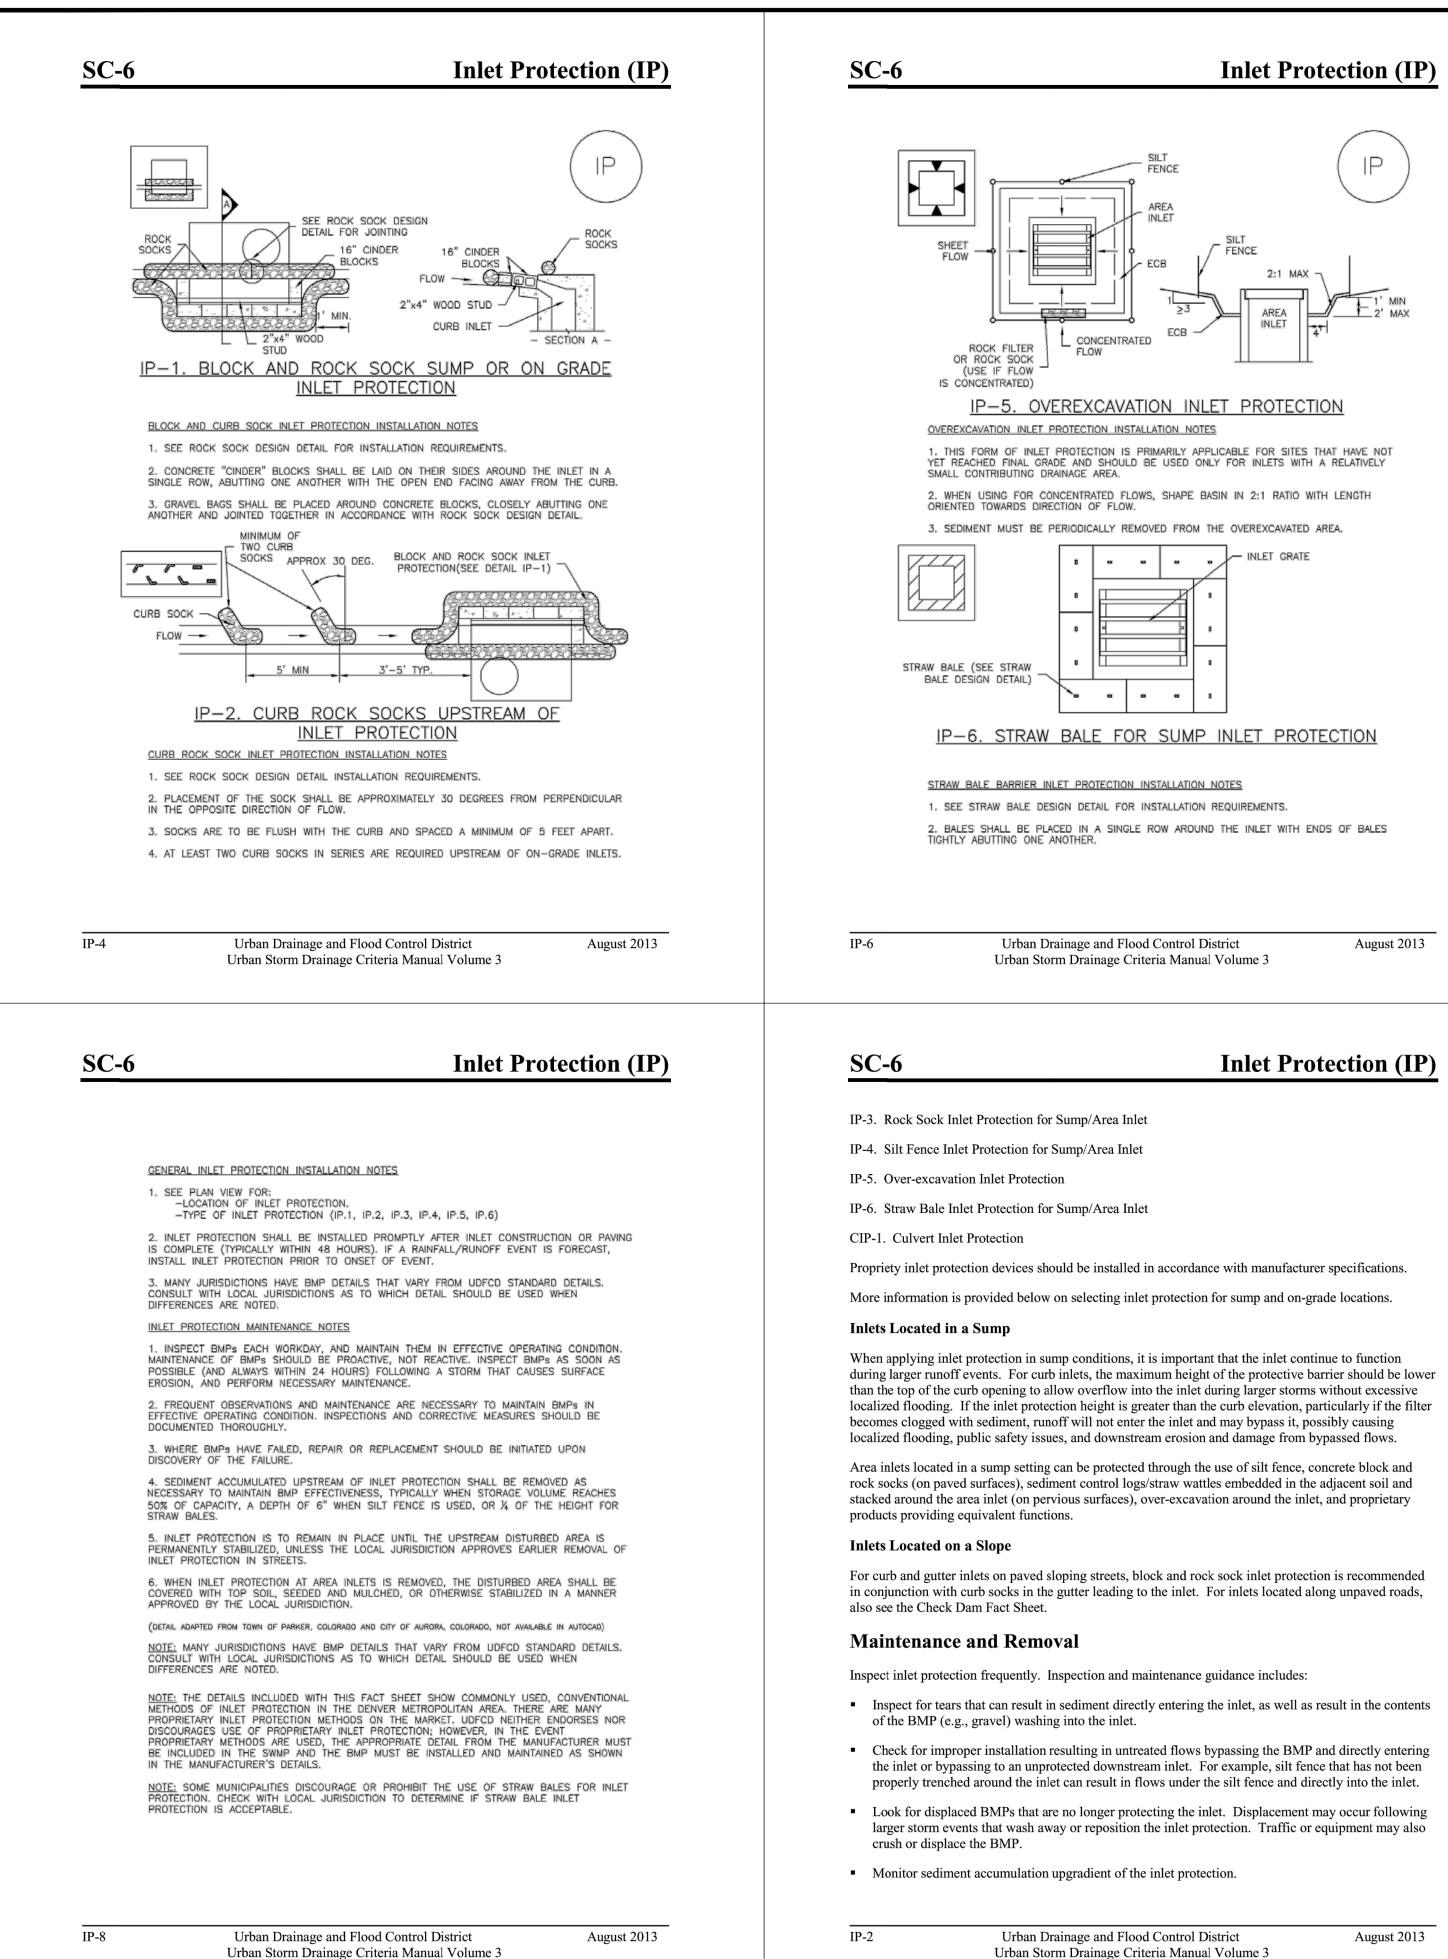

Urban Storm Drainage Criteria Manual Volume 3

Inlet Protection (IP)

FLOW ----D (12" MIN.) · CULVERT END SECTION BACKFILL UPSTREAM OF WATTLE ROCK SOCK - ROCK SOCK CULVERT INLET PROTECTION SECTION A <u>PLAN</u> Γ^{10" MIN.} KEY IN ROCK SOCK O" ON BEDROCK, PAVEMENT OR RIPRAP KEY IN ROCK SOCK 2" ON EARTH SECTION B CIP-1. CULVERT INLET PROTECTION CULVERT INLET PROTECTION INSTALLATION NOTES 1. SEE PLAN VIEW FOR -LOCATION OF CULVERT INLET PROTECTION. 2. SEE ROCK SOCK DESIGN DETAIL FOR ROCK GRADATION REQUIREMENTS AND JOINTING CULVERT INLET PROTECTION MAINTENANCE NOTES 1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE. 2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY. 3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE. 4. SEDIMENT ACCUMULATED UPSTREAM OF THE CULVERT SHALL BE REMOVED WHEN THE SEDIMENT DEPTH IS ½ THE HEIGHT OF THE ROCK SOCK. 5. CULVERT INLET PROTECTION SHALL REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS PERMANENTLY STABILIZED AND APPROVED BY THE LOCAL JURISDICTION. (DETAILS ADAPTED FROM AURORA, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

August 2013

Urban Drainage and Flood Control District Urban Storm Drainage Criteria Manual Volume 3

IP-7

SC-6

Inlet Protection (IP)

SC-6

- Remove sediment accumulation from the area upstream of the inlet protection, as needed to maintain BMP effectiveness, typically when it reaches no more than half the storage capacity of the inlet tection. For silt fence, remove sediment when it accumulates to a depth of no more than 6 inches. Remove sediment accumulation from the area upstream of the inlet protection as needed to maintain the functionality of the BMP.
- Propriety inlet protection devices should be inspected and maintained in accordance with manufacturer specifications. If proprietary inlet insert devices are used, sediment should be removed in a timely manner to prevent devices from breaking and spilling sediment into the storm drain.

Inlet protection must be removed and properly disposed of when the drainage area for the inlet has reached final stabilization.

August 2013

	COPPER CHASE AT STERLING RANCH	GRADING & EROSION CONTROL DETAILS	60	DESIGNED BY: CVW N/A DRAWN BY: CVW VERTICAL: SHEET 4 OF 6 GR04 CHECKED BY: VAS N/A
	212 N. WAHSATCH AVE STE 305	COLORADO SPRINGS, CO 80903 PHONE: 719.955.5485		
				CIVIL CONSULTANTS, INC.
	ORADO P.E. NO. 37160	FOR AND ON BEHALF OF	MILLES M	Innana Est
	VIRGIL A. SANCHEZ, COLORADO P.E.	A DOLLAR SANCE	37160	CONAL ENGINEERIN
	APRV'D. BY: DATE:			LANS WILL NOT BE RESPONSIBLE, OR LIABLE FOR, ES OF THESE PLANS. ALL CHANGES TO THE PLANS APPROVED BY THE PREPARER OF THESE PLANS.
FOR LOCATING & MARKING GAS, ELECTRIC, WATER & TELEPHONE LINES FOR BURIED UTILITY INFORMATION 48 HRS BEFORE YOU DIG CALL 1-800-922-1987	REVISIONS: NO. DATE: BY: DESCRIPTION:			THE ENGINEER PREPARING THESE PLA UNAUTHORIZED CHANGES TO OR USES MUST BE IN WRITING AND MUST BE A

NOTE: SEE URBAN DRAINAGE CRITERIA MANUAL (VOL. 3 FOR INSTALLATION AND MAINTENANCE (TYP)

ence (SF)	SC-1	SC-1	Silt Fence (SF)	<u>SC-1</u>	Silt Fence (SF)
		SILT FENCE INSTALLATION NOTES		SILT FENCE INSTALLATION NOTES	
(RĒ / FEN	COMMENDED) WOODEN CE POST WITH 10' MAX	1. SILT FENCE MUST BE PLACED AWAY PONDING. SILT FENCE AT THE TOE OF	FROM THE TOE OF THE SLOPE TO ALLOW FOR WATER A SLOPE SHOULD BE INSTALLED IN A FLAT LOCATION M THE TOE OF THE SLOPE TO ALLOW ROOM FOR	1. SILT FENCE MUST BE PLACED AW/ PONDING. SILT FENCE AT THE TOE O	Y FROM THE TOE OF THE SLOPE TO ALLOW FOR WATER A SLOPE SHOULD BE INSTALLED IN A FLAT LOCATION OM THE TOE OF THE SLOPE TO ALLOW ROOM FOR
SILT FENCE GEOTEXTILE			CH SHALL BE EXCAVATED USING TRENCHER OR SILT GRADERS, BACKHOES, OR SIMILAR EQUIPMENT SHALL		ICH SHALL BE EXCAVATED USING TRENCHER OR SILT O GRADERS, BACKHOES, OR SIMILAR EQUIPMENT SHALL
		3. COMPACT ANCHOR TRENCH BY HAND COMPACTION SHALL BE SUCH THAT SIL) WITH A "JUMPING JACK" OR BY WHEEL ROLLING. I FENCE RESISTS BEING PULLED OUT OF ANCHOR	3. COMPACT ANCHOR TRENCH BY HA COMPACTION SHALL BE SUCH THAT S	ID WITH A "JUMPING JACK" OR BY WHEEL ROLLING. LT FENCE RESISTS BEING PULLED OUT OF ANCHOR
COMPACTED			T AS IT IS ANCHORED TO THE STAKES, THERE SHOULD SES AFTER IT HAS BEEN ANCHORED TO THE STAKES.		HT AS IT IS ANCHORED TO THE STAKES, THERE SHOULD WES AFTER IT HAS BEEN ANCHORED TO THE STAKES.
FLOW	36"-48"		ORED TO THE STAKES USING 1" HEAVY DUTY STAPLES D NAILS SHOULD BE PLACED 3" ALONG THE FABRIC		HORED TO THE STAKES USING 1" HEAVY DUTY STAPLES ND NAILS SHOULD BE PLACED 3" ALONG THE FABRIC
	<u>TYP.</u>	6. AT THE END OF A RUN OF SILT FE TURNED PERPENDICULAR TO THE CONT	NCE ALONG A CONTOUR, THE SILT FENCE SHOULD BE DUR TO CREATE A "J-HOOK." THE "J-HOOK"	6. AT THE END OF A RUN OF SILT F TURNED PERPENDICULAR TO THE COM	ENCE ALONG A CONTOUR, THE SILT FENCE SHOULD BE TOUR TO CREATE A "J-HOOK." THE "J-HOOK"
6" MIN		RUNOFF FROM FLOWING AROUND THE E	NTOUR SHOULD BE OF SUFFICIENT LENGTH TO KEEP ND OF THE SILT FENCE (TYPICALLY 10' – 20'). RIOR TO ANY LAND DISTURBING ACTIVITIES.	RUNOFF FROM FLOWING AROUND THE	ONTOUR SHOULD BE OF SUFFICIENT LENGTH TO KEEP END OF THE SILT FENCE (TYPICALLY 10' - 20'). PRIOR TO ANY LAND DISTURBING ACTIVITIES.
AT LEAST 10" OF SILT FENCE "TAIL" SHALL BE		SILT FENCE MAINTENANCE NOTES		SILT FENCE MAINTENANCE NOTES	
BURIED		MAINTENANCE OF BMPs SHOULD BE PR	MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. OACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS IRS) FOLLOWING A STORM THAT CAUSES SURFACE AINTENANCE.	MAINTENANCE OF BMPs SHOULD BE	D MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. ROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS DURS) FOLLOWING A STORM THAT CAUSES SURFACE MAINTENANCE.
·	<u>. </u>	2. FREQUENT OBSERVATIONS AND MAIN	IENANCE ARE NECESSARY TO MAINTAIN BMPs IN ICTIONS AND CORRECTIVE MEASURES SHOULD BE	2. FREQUENT OBSERVATIONS AND MA	NTENANCE ARE NECESSARY TO MAINTAIN BMPs IN PECTIONS AND CORRECTIVE MEASURES SHOULD BE
SILT_FENCE	POSTS SHALL OVERLAP		OR REPLACEMENT SHOULD BE INITIATED UPON		OR REPLACEMENT SHOULD BE INITIATED UPON
JOIN	OINTS SO THAT NO GAPS 7 EXIST IN SILT FENCE		OF THE SILT FENCE SHALL BE REMOVED AS NEEDED E BMP, TYPICALLY WHEN DEPTH OF ACCUMULATED	4. SEDIMENT ACCUMULATED UPSTREA TO MAINTAIN THE FUNCTIONALITY OF SEDIMENTS IS APPROXIMATELY 6".	OF THE SILT FENCE SHALL BE REMOVED AS NEEDED HE BMP, TYPICALLY WHEN DEPTH OF ACCUMULATED
			IEN THERE ARE SIGNS OF WEAR, SUCH AS SAGGING,		HEN THERE ARE SIGNS OF WEAR, SUCH AS SAGGING,
OSTS SHALL BE JOINED AS WN, THEN ROTATED 180 DEG. THICK DIRECTION SHOWN AND DRIVEN	NESS OF GEOTEXTILE HAS		UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED CTION, OR IS REPLACED BY AN EQUIVALENT PERIMETER		E UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED DICTION, OR IS REPLACED BY AN EQUIVALENT PERIMETER
INTO THE GROUND		7. WHEN SILT FENCE IS REMOVED, ALL	DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, STABILIZED AS APPROVED BY LOCAL JURISDICTION.	7. WHEN SILT FENCE IS REMOVED, A	L DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, STABILIZED AS APPROVED BY LOCAL JURISDICTION.
		NOTE: MANY JURISDICTIONS HAVE BMP	O AND CITY OF AURORA, NOT AVAILABLE IN AUTOCAD) DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. S TO WHICH DETAIL SHOULD BE USED WHEN	NOTE: MANY JURISDICTIONS HAVE BM	NDO AND CITY OF AURORA, NOT AVAILABLE IN AUTOCAD) P DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. AS TO WHICH DETAIL SHOULD BE USED WHEN
Urban Drainage and Flood Control D Urban Storm Drainage Criteria Manual V		SF-4 Urban Drainage and Urban Storm Drainage	Flood Control District November 2010 e Criteria Manual Volume 3	SF-4 Urban Drainage an Urban Storm Draina	d Flood Control District November 2010 ge Criteria Manual Volume 3
			e Criteria Manual Volume 3	Urban Storm Draina	
Urban Storm Drainage Criteria Manual V	Volume 3	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4	Urban Storm Draina	ge Criteria Manual Volume 3
Urban Storm Drainage Criteria Manual V	Volume 3	Urban Storm Drainag	e Criteria Manual Volume 3	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE	ge Criteria Manual Volume 3
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) IRAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE	SC-3	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WIDTH CAN BE	Urban Storm Draina <u>SM-4</u> V <u>STABILIZED CONSTRUCTION ENTRANCE</u> 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION E	e Criteria Manual Volume 3
Urban Storm Drainage Criteria Manual N Bale Barrier (SBB) IRAW BALE INSTALLATION NOTES . SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. . STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE URISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE . STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C	SC-3 EE STRAW OR HAY. LOCAL ED FREE.	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WIDTH CAN BE LESS IF CONST. VEHICLES ARE PHYSICALLY CONFINED ON	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM). 2. CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECTS	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) <u>rexit installation notes</u> <u>vitrance(s)/exit(s).</u> <u>nce(s)/exit(s)</u> (with/without wheel wash, <u>lizeD construction Entrances are only to be</u> (typically ranging from a week to a month)
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) RAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE IRISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C EIGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR	SC-3 EE STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WDTH CAN BE LESS IF CONST. VEHICLES ARE PHYSICALLY	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTR CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTR	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) <u>rexit installation notes</u> <u>vitrance(s)/exit(s).</u> <u>nce(s)/exit(s)</u> (with/without wheel wash, <u>lizeD construction Entrances are only to be</u> (typically ranging from a week to a month)
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) STRAW BALE INSTALLATION NOTES 1. SEE PLAN VIEW FOR: —LOCATION(S) OF STRAW BALES. 2. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE JURISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE 3. STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C WEIGH NOT LESS THAN 35 POUNDS. 4. WHEN STRAW BALES ARE USED IN SERIES AS A BARR 36. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 37. A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO	SC-3 EE STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL 6"X18"X18". A DEPTH OF 4". STRAW BALES	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WIDTH CAN BE LESS IF CONST. VHICLES ARE PHYSICALLY CONFINED ON BOTH SIDES)	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRAN DISTURBING ACTIVITIES.	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) EXIT INSTALLATION NOTES VITRANCE(S)/EXIT(S). NCE(S)/EXITS(S) (WITH/WITHOUT WHEEL WASH, LIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE (TYPICALLY RANGING FROM A WEEK TO A MONTH) ULAR ACCESS. ANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS RUCTION SITE FROM PAVED RIGHT-OF-WAYS. CE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) TRAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE IRISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C EIGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO HALL BE PLACED SO THAT BINDING TWINE IS ENCOMPAS ALE(S). ALL EXCAVATED SOIL SHALL BE PLACED ON THE BD COMPACTED.	SC-3 EE STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL 6"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALE(S)	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WIDTH CAN BE LESS IF CONST. VHICLES ARE PHYSICALLY CONFINED ON BOTH SIDES)	Urban Storm Draina <u>SM-4</u> V <u>STABILIZED CONSTRUCTION ENTRANCE</u> 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM. STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 4. STABILIZED CONSTRUCTION ENTRAN DISTURBING ACTIVITIES.	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) YEXIT INSTALLATION NOTES VITRANCE(S)/EXIT(S). NCE(S)/EXIT(S) (WITH/WITHOUT WHEEL WASH, LIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE (TYPICALLY RANGING FROM A WEEK TO A MONTH) JULAR ACCESS. ANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS RUCTION SITE FROM PAVED RIGHT-OF-WAYS. CE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND SHALL BE PLACED UNDER THE STABILIZED TO THE PLACEMENT OF ROCK.
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) RAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE RISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 OF IGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO IGL EXCAVATED SOIL SHALL BE PLACED ON THE D COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD FOR AKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE	SC-3 EE STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL S"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE : UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WOODEN	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WIDTH CAN BE LESS IF CONST. VHICLES ARE PHYSICALLY CONFINED ON BOTH SIDES)	Urban Storm Draina <u>SM-4</u> V <u>STABILIZED CONSTRUCTION ENTRANCE</u> 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM. STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 4. STABILIZED CONSTRUCTION ENTRAN DISTURBING ACTIVITIES.	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) "EXIT INSTALLATION NOTES VITRANCE(S)/EXIT(S). NCE(S)/EXITS(S) (WITH/WITHOUT WHEEL WASH, LIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE (TYPICALLY RANGING FROM A WEEK TO A MONTH) JULAR ACCESS. ANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS RUCTION SITE FROM PAVED RIGHT-OF-WAYS. CE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND SHALL BE PLACED UNDER THE STABILIZED TO THE PLACEMENT OF ROCK. LOCAL JURISDICTION, ROCK SHALL CONSIST OF DOT REGATE OR 6" (MINUS) ROCK.
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) RAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE IRISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 OF EIGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE PLACED ON THE ID COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD R AKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE TAME BALE MAINTENANCE NOTES INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IN ANTENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REA	EE STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL 6"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE : UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE : UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WOODEN : DRIVEN 6" INTO THE GROUND.	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WIDTH CAN BE LESS IF CONST. VEHICLES ARE PHYSICALY CONFINED ON BOTH SIDES) 0 FOOT (MIN.)	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRING CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, AASHTO #3 COARSE ACC STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD BE	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) 'EXIT INSTALLATION NOTES VITRANCE(S)/EXIT(S). NCE(S)/EXIT(S) (WITH/WITHOUT WHEEL WASH, LIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE (TYPICALLY RANGING FROM A WEEK TO A MONTH) ULAR ACCESS. ANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS RUCTION SITE FROM PAVED RIGHT-OF-WAYS. CE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND SHALL BE PLACED UNDER THE STABILIZED TO THE PLACEMENT OF ROCK. LOCAL JURISDICTION, ROCK SHALL CONSIST OF DOT REGATE OR 6" (MINUS) ROCK. 'EXIT MAINTENANCE NOTES D MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. ROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) RAW BALE INSTALLATION NOTES RAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE IRISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 OF EIGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO FAUL BE PLACED SO THAT BINDING TWINE IS ENCOMPASI LAUSION ANCHOR TRENCH SHALL BE PLACED ON THE ID COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD OF AKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE RAW BALE MAINTENANCE NOTES INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT ANTENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REA SSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A ROSION, AND PERFORM NECESSARY MAINTENANCE.	EE STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL 65"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE E UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WOODEN E DRIVEN 6" INTO THE GROUND.	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 VTC 20 FOOT (WDTH CAN BE LESS IF CONST. VEHICLES ARE PHYSICALLY CONFINED ON BOTH SIDES) 0 FOOT (WIN.) UNLESS OTHERWISE SPECIFIED	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECT: WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 4. STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, AASHTO #3 COARSE ACC STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT MPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD ENTRANCE 1. INSPECT BMPS EACH WORK	e Criteria Manual Volume 3 ehicle Tracking Control (VTC) 'EXIT INSTALLATION NOTES VEXIT INSTALLATION NOTES NTRANCE(S)/EXIT(S). NCE(S)/EXITS(S) (WITH/WITHOUT WHEEL WASH, LIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE (TYPICALLY RANGING FROM A WEEK TO A MONTH) ULAR ACCESS. ANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS RUCTION SITE FROM PAVED RIGHT-OF-WAYS. CE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND SHALL BE PLACED UNDER THE STABILIZED TO THE PLACEMENT OF ROCK. LOCAL JURISDICTION, ROCK SHALL CONSIST OF DOT REGATE OR 6" (MINUS) ROCK. 'EXIT MAINTENANCE NOTES D MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. ROACTIVE, NOT REACTIVE. INSPECT BMPS AS SOON AS JURS) FOLLOWING A STORM THAT CAUSES SURFACE MINTENANCE. XTENANCE ARE NECESSARY TO MAINTAIN BMP5 IN
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) IRAW BALE INSTALLATION_NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE URISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C EIGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR E TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO HALL BE PLACED SO THAT BINDING TWINE IS ENCOMPAS ALE(S). ALL EXCAVATED SOIL SHALL BE PLACED ON THE ND COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD OF TAKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE TRAW BALE MAINTENANCE NOTES INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM II AINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REA OSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A ROSION, AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECH FFECTIVE OPERATING CONDITION. INSPECTIONS AND CORF OCUMENTED THOROUGHLY.	E STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL 9"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WOODEN C DRIVEN 6" INTO THE GROUND. A EFFECTIVE OPERATING CONDITION. CTIVE. INSPECT BMPS AS SOON AS STORM THAT CAUSES SURFACE ESSARY TO MAINTAIN BMPs IN RECTIVE MEASURES SHOULD BE	Urban Storm Drainag	e Criteria Manual Volume 3 ol (VTC) SM-4 SM-4 SM-4	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 4. STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, AASHTO #3 COARSE ACC STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT EMPS EACH WORKDAY, AN MINITEMANCE OF EMPS SHOULD BE POSSIBLE (AND ALWAYS WITHIN 24 H EROSION, AND PERFORM NEOESSARY 2. FREQUENT OBSERVATIONS AND MA EFFECTIVE OPERATING CONDITION. INS DOCUMENTED THOROUGHLY. 3. WHERE EMPS HAVE FALLED, REPAIL	exit installation notes Exit installation notes VITRANCE(S)/EXIT(S). NCE(S)/EXIT(S) (WITH/WITHOUT WHEEL WASH, LIZED CONSTRUCTION ENTRANCES ARE ONLY TO BE (TYPICALLY RANGING FROM A WEEK TO A MONTH) ULAR ACCESS. ANCE/EXIT SHALL BE LOCATED AT ALL ACCESS POINTS RUCTION SITE FROM PAVED RIGHT-OF-WAYS. CE/EXIT SHALL BE INSTALLED PRIOR TO ANY LAND SHALL BE PLACED UNDER THE STABILIZED TO THE PLACEMENT OF ROCK. LOCAL JURISDICTION, ROCK SHALL CONSIST OF DOT REGATE OR 6" (MINUS) ROCK. ZEIT MAINTENANCE NOTES D MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. ROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS DURS) FOLLOWING A STORM THAT CAUSES SURFACE MAINTENANCE.
Urban Storm Drainage Criteria Manual V Bale Barrier (SBBB) STRAW BALE INSTALLATION NOTES 1. SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. 2. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRA JURISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE 3. STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 O WEIGH NOT LESS THAN 35 POUNDS. 4. WHEN STRAW BALES ARE USED IN SERIES AS A BARR BE TIGHTLY ABUTTING ONE ANOTHER. 5. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 6. A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO SHALL BE PLACED SO THAT BINDING TWINE IS ENCOMPAS BALE(S). ALL EXCAVATED SOIL SHALL BE PLACED ON THE AND COMPACTED. 7. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD IS STRAW BALE MAINTENANCE NOTES 1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IT MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REA POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A EROSION, AND PERFORM NECESSARY MAINTENANCE. 2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECL DEFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORP 2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECL DOCUMENTED THOROUGHLY. 3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT DISCOVERY OF THE FAILURE. 4. STRAW BALES SHALL BE REPLACED IF THEY BECOME I	E STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL 6"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE : UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WODDEN : DRIVEN 6" INTO THE GROUND. AN EFFECTIVE OPERATING CONDITION. CTIVE. INSPECT BMPs AS SOON AS STORM THAT CAUSES SURFACE ESSARY TO MAINTAIN BMPs IN RECTIVE MEASURES SHOULD BE SHOULD BE INITIATED UPON	<section-header></section-header>	e Criteria Manual Volume 3	Urban Storm Draina SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRANCE ON STRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRAN- USED ON SHORT DURATION PROJECTS WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRAN- DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PROOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASHTO #3 COARSE ACC STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AN MAINTENANCE OF BMPS SHOULD BE POSSIBLE (AND ALWAYS WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND MAE EFFECTIVE OF PERATING CONDITION. INS DOCUMENTED THOROUGHLY. 3. WHERE BMPS HAVE FALLED, REPAIL DISCOVERY OF THE FAILURE.	Performation and the stabilized of the stabilized of the placed under the stabilized prior to the stabilized should be initiated upon
Urban Storm Drainage Criteria Manual V Bale Barrier (SBBB) STRAW BALE INSTALLATION NOTES 1. SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. 2. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE DURISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE 3. STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C WEIGH NOT LESS THAN 35 POUNDS. 4. WHEN STRAW BALES ARE USED IN SERIES AS A BARR 35. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 36. A UNIFORM ANCHOR TRENCH SHALL BE PLACED ON THE SHALL BE PLACED SO THAT BINDING TWINE IS ENCOMPAS 33. STRAW BALE DIMENSIONS SHALL BE PLACED ON THE 34. WHEN STRAW BALED SOIL SHALL BE PLACED ON THE 35. A UNIFORM ANCHOR TRENCH SHALL BE PLACED ON THE 36. A UNIFORM ANCHOR TRENCH SHALL BE PLACED ON THE 37. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD 16 38. STRAW BALE MAINTENANCE NOTES 31. INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT 32. INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT 33. INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT 34. INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT 35. ALL EXCAVATED SOIL SHALL BE USED TO HOLD 16 35. STRAW BALE MAINTENANCE NOTES 31. INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT 32. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECH 33. STRAW BALE MAINTENANCE NOTES 34. UNITENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REAL 35. STRAW BALE MAINTENANCE NOTES 35. A UNITENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REAL 36. STRAW BALE MAINTENANCE NOTES 37. INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IT 36. MALE MAINTENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REAL 37. OSION, AND PERFORM NECESSARY MAINTENANCE. 37. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECL 37. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECL 37. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECL 38. WHERE BMP'S HAVE FAILED, REPAIR OR REPLACEMENT 39. WHERE MANS HAVE FAILED, REPAIR OR REPLACEMENT 39. WHERE BMP'S HAVE FAI	E STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL S"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VETTICAL SIDES OF THE E UPHILL SIDE OF THE STRAW BALES SING THE VETTICAL SIDES OF THE E UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WOODEN E DRIVEN 6" INTO THE GROUND. ACH BALE IN PLACE. WOODEN E DRIVEN 6" INTO THE GROUND. E STORM THAT CAUSES SURFACE ESSARY TO MAINTAIN BMPs IN EECTIVE MEASURES SHOULD BE SHOULD BE INITIATED UPON HEAVILY SOILED, ROTTEN, OR ARRIER SHALL BE REMOVED AS	Urban Storm Drainag	e Criteria Manual Volume 3	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTR CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM. 2. CONSTRUCTION MAT OR TRM. 3. A STABILIZED CONSTRUCTION ENTR WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 4. STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTLE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASSHTO #3 COARSE AG STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT BMPS EACH WORKDAY, AI MAINTENANCE OF BMPS EACH WORKDAY, AI MAINTENANCE OF BMPS SHOULD BE POSSIBLE (AND ALWAYS WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND MA EFFECTIVE OPERATING CONDITION, INS DOCUMENTED THOROUGHLY. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 4. ROCK SHALL BE REAPPILED OR R ENTRANCE/EXIT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED I	Performation and the stabilized of the stabilized of the placed under the stabilized prior to the stabilized should be initiated upon
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) AW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE ISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 OF GH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO ALL BE PLACED SO THAT BINDING TWINE IS ENCOMPASE (S), ALL EXCAVATED SOIL SHALL BE PLACED ON THE 0 COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD IN KES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE AW BALE MAINTENANCE NOTES INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IN TITENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REA SIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A DISON, AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECI- ECTIVE OPERATING CONDITION. INSPECTIONS AND CORF JUMENTED THOROUGHLY. WHERE BMP'S HAVE FAILED, REPAIR OR REPLACEMENT COVERY OF THE FAILURE. STRAW BALES SHALL BE REPLACED IF THEY BECOME IN MAGED BEYOND REPAIR. SEDIMENT ACCOUNULATED UPSTREAM OF STRAW BALE E DED TO MAINTAIN FUNCTIONALITY OF THE BMP, TYPICA- IMMENTS IS APPROXIMATELY ½ OF THE HEIGHT OF THE STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UIT	E STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL S"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE C UPHILL SIDE OF THE STRAW BALES SING THE VERTICAL SIDES OF THE STRAW BALE ARRIER STRAW HALL BE REMOVED AS LLY WHEN DEPTH OF ACCUMULATED STRAW BALE BARRIER.		e Criteria Manual Volume 3 of (VTC) SM-4	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENT -LOCATION OF CONSTRUCTION ENT -LOCATION OF CONSTRUCTION ENT CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECT: WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA USED ON SHORT DURATION PROJECT: WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, AASHTO #3 COARSE ACC STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT EMPS EACH WORKDAY, AI MINTENANCE OF EMPS EACH WORKDAY, AI MINTENANCE OF EMPS EACH WORKDAY, AI 2. FREQUENT OBSERVATIONS AND MA EFFECTIVE OPERATING CONDITION. INSP DOCUMENTED THOROUGHLY. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 4. ROCK SHALL BE REAPPILED OR RE ENTRANCE/EXIT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED I AT THE END OF THE DAY BY SHOULD DOWN STORM SEWER DRAINS.	ecriteria Manual Volume 3 ecriteria Manual Volume 3 exite Manual Volume 3 exite Manual Volume 3 exite Manual Volume 4 exite Manual V
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) WW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE ISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 O GH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO ALL BE PLACED SO THAT BINDING TWINE IS ENCOMPAS LE(S), ALL EXCAVATED SOIL SHALL BE PLACED ON THE COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD B KES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE AW BALE MAINTENANCE NOTES INSPECT BMP'S EACH WORKDAY, AND MAINTAIN THEM IN NETENANCE OF BMP'S SHOULD BE PROACTIVE, NOT REA SSIBLE (AND ALWAY'S WITHIN 24 HOURS) FOLLOWING A DSION, AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECH CUMENTED THOROUGHLY. WHERE BMP'S HAVE FAILED, REPAIR OR REPLACEMENT COVERY OF THE FAILURE. STRAW BALES SHALL BE REPLACED IF THEY BECOME IN AGED BEYOND REPAIR. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE S SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE S SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE S DDED TO MAINTAIN FUNCTIONALITY OF THE BMP, TYPICA MARES SHALL BE REPLACED IF THEY BECOME IN AGED BEYOND REPAIR. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE B DDED TO MAINTAIN FUNCTIONALITY OF THE BMP, TYPICA MARES SHALL SARE TO REMAIN IN PLACE UNTIL THE UI BILIZED AND APPROVED BY THE LOCAL JURISDICTION. WHEN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI BILIZED AND APPROVED BY THE LOCAL JURISDICTION. WHEN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI BILIZED AND APPROVED BY THE LOCAL JURISDICTION.	E STRAW OR HAY. LOCAL E STRAW OR HAY. LOCAL ED FREE. UBIC FEET OF STRAW OR HAY AND ER, THE END OF EACH BALE SHALL S"X18"X18". A DEPTH OF 4". STRAW BALES SING THE VERTICAL SIDES OF THE : UPHILL SIDE OF THE STRAW BALE(S) EACH BALE IN PLACE. WOODEN :: DRIVEN 6" INTO THE GROUND. EACH BALE IN PLACE. WOODEN :: DRIVEN 6" INTO THE GROUND. EACH BALE IN PLACE. WOODEN :: DRIVEN 6" INTO THE GROUND. A EFFECTIVE OPERATING CONDITION. CTIVE. INSPECT BMPs AS SOON AS STORM THAT CAUSES SURFACE ESSARY TO MAINTAIN BMPs IN HECTIVE MEASURES SHOULD BE SHOULD BE INITIATED UPON HEAVILY SOLED, ROTTEN, OR ARRIER SHALL BE REMOVED AS LLY WHEN DEPTH OF ACCUMULATED STRAW BALE BARRIER. PSTREAM DISTURBED AREA IS REAS SHALL BE COVERED WITH	<section-header></section-header>	e Criteria Manual Volume 3	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENT -LOCATION OF CONSTRUCTION ENT -LOCATION OF CONSTRUCTION ENT CONSTRUCTION MAT OR TRM STAB USED ON SHORT DURATION PROJECT: WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA USED ON SHORT DURATION PROJECT: WHERE THERE WILL BE LIMITED VEHI 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, AASHTO #3 COARSE ACC STABILIZED CONSTRUCTION ENTRANCE 1. INSPECT EMPS EACH WORKDAY, AI MINTENANCE OF EMPS EACH WORKDAY, AI MINTENANCE OF EMPS EACH WORKDAY, AI 2. FREQUENT OBSERVATIONS AND MA EFFECTIVE OPERATING CONDITION. INSP DOCUMENTED THOROUGHLY. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 4. ROCK SHALL BE REAPPILED OR RE ENTRANCE/EXIT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED I AT THE END OF THE DAY BY SHOULD DOWN STORM SEWER DRAINS.	Performation of the stabilized of the stabilized of the placement of rock. Advance of the placement should be initiated upon strance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the recessary to maintain bends of the recessary to maintain bends of the construction where the stabilized of the recessary to the stabilized of the recessary to the stabilized of the construction of the recessary to the stabilized of the recessary to the stabilized of the construction of the construction of the recessary to the stabilized of the rece
Urban Storm Drainage Criteria Manual V Bale Barrier (SBBB) AW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE RISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C GH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO ALL BE PLACED SO THAT BINDING TWINE IS ENCOMPASE E(S), ALL EXCAVATED SOIL SHALL BE PLACED ON THE COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD F KES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE WE BALE MAINTENANCE NOTES INSPECT BMPS EACH WORKDAY, AND MAINTAIN THEM IN NTENANCE OF BMPS SHOULD BE PROACTIVE, NOT REA SIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A SIGN, AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTAIN THEM IN NTENANCE OF BMPS SHOULD BE PROACTIVE, NOT REA SIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A SIGN, AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECE ECTIVE OPERATING CONDITION. INSPECTIONS AND CORF JUMENTED THOROUGHLY. WHERE BMPS HAVE FAILED, REPAIR OR REPLACEMENT COVERY OF THE FAILURE. STRAW BALES SHALL BE REPLACED IF THEY BECOME IN MAED BEYOND REPAIR. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE E DED TO MAINTAIN FUNCTIONALITY OF THE BMP, TYPICA IMENTS IS APPROXIMATELY ½ OF THE HEIGHT OF THE STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN BILZED AND APPROVED BY THE LOCAL JURISDICTION. WHEN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UN STRAW BALE	SC-3 SC-3	<section-header></section-header>	e Criteria Manual Volume 3 ol (VTC) SM-4 SM-4 SM-4	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRANCE -TYPE OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM). 2. CONSTRUCTION MAT OR TRM). 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASHTO #3 COARSE AGO STABILIZED CONSTRUCTION ENTRANCE (SINTERNING ACTIVITIES. 1. INSPECT BUR'S EACH WORKDAY, AN MAINTENANCE OF BUR'S SHOULD BE POSSIBLE (AND ALWAR'S WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND AM BERTER OF EMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED OR RE INTRANCE/CT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED IN AT THE END OF THE DAIL UNISDICTIONS INVE EMP CONSULT WITH LOCAL JUNISDICTIONS HAVE EMIL CONSULT WITH LOCAL JUNISDICTIONS H	Performation of the stabilized of the stabilized of the placement of rock. Advance of the placement should be initiated upon strance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the recessary to maintain bends of the recessary to maintain bends of the construction where the stabilized of the recessary to the stabilized of the recessary to the stabilized of the construction of the recessary to the stabilized of the recessary to the stabilized of the construction of the construction of the recessary to the stabilized of the rece
Urban Storm Drainage Criteria Manual V all Barrier (SBB) W BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE SDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE SDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C H NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE PLACED ON THE COMPACTED. WO (2) WOODEN STAKES SHALL BE PLACED ON THE COMPACTED. WO (2) WOODEN STAKES SHALL BE USED TO HOLD IN CES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE W BALE MAINTENANCE NOTES NSPECT BMPS EACH WORKDAY, AND MAINTAIN THEM IN ITENANCE OF BMPS SHOULD BE PROACTIVE, NOT REA SIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A SION, AND PERFORM NECESSARY MAINTENANCE. REQUENT OBSERVATIONS AND MAINTENANCE ARE NECE CITVE OPERATING CONDITION. INSPECTIONS AND CORF UMENTED THOROUGHLY. WHERE BMPS HAVE FAILED, REPAIR OR REPLACEMENT OVERY OF THE FAILURE. STRAW BALES SHALL BE REPLACED IF THEY BECOME I ACED BEYOND REPAIR. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE E DED TO MAINTAIN FUNCTIONALITY OF THE BEIGHT OF THE STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE UI STRAW BALES ARE TO REMAIN AND CALUERED AND SOL, SEEDED AND MULCHED OR OTHERWISE STABILIZED SDICTION. HIS ADAPTED FROM TOWN OF PARKER, COLORADO, NOT AVAILABLE I	SC-3 SC-3	<section-header></section-header>	e Criteria Manual Volume 3	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRANCE -TYPE OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM). 2. CONSTRUCTION MAT OR TRM). 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASHTO #3 COARSE AGO STABILIZED CONSTRUCTION ENTRANCE (SINTERNING ACTIVITIES. 1. INSPECT BUR'S EACH WORKDAY, AN MAINTENANCE OF BUR'S SHOULD BE POSSIBLE (AND ALWAR'S WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND AM BERTER OF EMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED OR RE INTRANCE/CT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED IN AT THE END OF THE DAIL UNISDICTIONS INVE EMP CONSULT WITH LOCAL JUNISDICTIONS HAVE EMIL CONSULT WITH LOCAL JUNISDICTIONS H	Performation of the stabilized of the stabilized of the placement of rock. Advance of the placement should be initiated upon strance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the recessary to maintain bends of the recessary to maintain bends of the construction where the stabilized of the recessary to the stabilized of the recessary to the stabilized of the construction of the recessary to the stabilized of the recessary to the stabilized of the construction of the construction of the recessary to the stabilized of the rece
Urban Storm Drainage Criteria Manual V Bale Barrier (SBBB) RAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE RISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 C 106H NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO IALL BE FLACED SO THAT BINDING TWINE IS ENCOMPASE LE(S). ALL EXCAVATED SOIL SHALL BE PLACED ON THE D COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD ID AKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE RAW BALE MAINTENANCE NOTES INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM II UNTENANCE OF BMPS SHOULD BE PROACTIVE, NOT REA SOSION, AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECH FECTUR OPERATING CONDITION. INSPECTIONS AND CORF FECTUR OF THE FAILED, REPAIR OR REPLACEMENT SCOVERY OF THE FAILED, REPAIR OR REPLACEMENT SCOVERY OF THE FAILED, REPAIR OF STRAW BALE BE EDDED TO MAINTAIN FUNCTIONALITY OF THE BECOME D MAGED BEYOND REPAIR. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE BE EDDED TO MAINTAIN FUNCTIONALITY OF THE BEMP, TYPICA DIMENTS IS APPROXIMATELY ½ OF THE LOCAL JURISDICTION. WHEN STRAW BALES ARE TO REMAIN IN PLACE UNTIL THE U ABILIZED AND APPROVED BY THE LOCAL JURISDICTION. WHEN STRAW BALES ARE REMOVED, ALL DISTURBED AI PSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZING NISULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL	SC-3 SC-3	<section-header></section-header>	e Criteria Manual Volume 3	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRANCE -TYPE OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM). 2. CONSTRUCTION MAT OR TRM). 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASHTO #3 COARSE AGO STABILIZED CONSTRUCTION ENTRANCE (SINTERNING ACTIVITIES. 1. INSPECT BUR'S EACH WORKDAY, AN MAINTENANCE OF BUR'S SHOULD BE POSSIBLE (AND ALWAR'S WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND AM BERTER OF EMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED OR RE INTRANCE/CT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED IN AT THE END OF THE DAIL UNISDICTIONS INVE EMP CONSULT WITH LOCAL JUNISDICTIONS HAVE EMIL CONSULT WITH LOCAL JUNISDICTIONS H	Performation of the stabilized of the stabilized of the placement of rock. Advance of the placement should be initiated upon strance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the recessary to maintain bends of the recessary to maintain bends of the construction where the stabilized of the recessary to the stabilized of the recessary to the stabilized of the construction of the recessary to the stabilized of the recessary to the stabilized of the construction of the construction of the recessary to the stabilized of the rece
Urban Storm Drainage Criteria Manual V Bale Barrier (SBB) RAW BALE INSTALLATION NOTES SEE PLAN VIEW FOR: -LOCATION(S) OF STRAW BALES. STRAW BALES SHALL CONSIST OF CERTIFIED WEED FRE IRISDICTIONS MAY REQUIRE PROOF THAT BALES ARE WE STRAW BALES SHALL CONSIST OF APPROXIMATELY 5 OF IGH NOT LESS THAN 35 POUNDS. WHEN STRAW BALES ARE USED IN SERIES AS A BARR TIGHTLY ABUTTING ONE ANOTHER. STRAW BALE DIMENSIONS SHALL BE APPROXIMATELY 3 A UNIFORM ANCHOR TRENCH SHALL BE EXCAVATED TO HALL BE PLACED SO THAT BINDING TWINE IS ENCOMPAS ALL SCAVATED SOIL SHALL BE PLACED ON THE ID COMPACTED. TWO (2) WOODEN STAKES SHALL BE USED TO HOLD IN AKES SHALL BE 2"X2"X24". WOODEN STAKES SHALL BE INSPECT BMPS EACH WORKDAY, AND MAINTAIN THEM IN INSPECT BMPS EACH WORKDAY, AND MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECK SOLOW. AND PERFORM NECESSARY MAINTENANCE. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECK DOCUMENTED THOROUGHLY. WHERE BMPS HAVE FAILED, REPAIR OR REPLACEMENT SCOVERY OF THE FAILURE. STRAW BALES SHALL BE REPLACED IF THEY BECOME IN MAGED BEYOND REPAIR. SEDIMENT ACCUMULATED UPSTREAM OF STRAW BALE B	SC-3 SC-3	<section-header></section-header>	e Criteria Manual Volume 3	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRANCE -TYPE OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM). 2. CONSTRUCTION MAT OR TRM). 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASHTO #3 COARSE AGO STABILIZED CONSTRUCTION ENTRANCE (SINTERNING ACTIVITIES. 1. INSPECT BUR'S EACH WORKDAY, AN MAINTENANCE OF BUR'S SHOULD BE POSSIBLE (AND ALWAR'S WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND AM BERTER OF EMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED OR RE INTRANCE/CT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED IN AT THE END OF THE DAIL UNISDICTIONS INVE EMP CONSULT WITH LOCAL JUNISDICTIONS HAVE EMIL CONSULT WITH LOCAL JUNISDICTIONS H	Performation of the stabilized of the stabilized of the placement of rock. Advance of the placement should be initiated upon strance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the recessary to maintain bends of the recessary to maintain bends of the construction where the stabilized of the recessary to the stabilized of the recessary to the stabilized of the construction of the recessary to the stabilized of the recessary to the stabilized of the construction of the construction of the recessary to the stabilized of the rece
Urban Storm Drainage Criteria Manual V ALL STATUS STATES	SC-3 SC-3	<section-header></section-header>	e Criteria Manual Volume 3	SM-4 V STABILIZED CONSTRUCTION ENTRANCE 1. SEE PLAN VIEW FOR -LOCATION OF CONSTRUCTION ENTRANCE -TYPE OF CONSTRUCTION ENTRA CONSTRUCTION MAT OR TRM). 2. CONSTRUCTION MAT OR TRM). 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 3. A STABILIZED CONSTRUCTION ENTRA DISTURBING ACTIVITIES. 5. A NON-WOVEN GEOTEXTILE FABRIC CONSTRUCTION ENTRANCE/EXIT PRIOF 6. UNLESS OTHERWISE SPECIFIED BY SECT. #703, ASHTO #3 COARSE AGO STABILIZED CONSTRUCTION ENTRANCE (SINTERNING ACTIVITIES. 1. INSPECT BUR'S EACH WORKDAY, AN MAINTENANCE OF BUR'S SHOULD BE POSSIBLE (AND ALWAR'S WITHIN 24 H EROSION, AND PERFORM NECESSARY 2. FREQUENT OBSERVATIONS AND AM BERTER OF EMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED, REPAIL DISCOVERY OF THE FAILURE. 3. WHERE BMPS HAVE FAILED OR RE INTRANCE/CT TO MAINTAIN A CONS 5. SEDIMENT TRACKED ONTO PAVED IN AT THE END OF THE DAIL UNISDICTIONS INVE EMP CONSULT WITH LOCAL JUNISDICTIONS HAVE EMIL CONSULT WITH LOCAL JUNISDICTIONS H	Performation of the stabilized of the stabilized of the placement of rock. Advance of the placement should be initiated upon strance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the placement of rock. Advance or several to the stabilized of the stabilized of the recessary to maintain bends of the recessary to maintain bends of the construction where the stabilized of the recessary to the stabilized of the recessary to the stabilized of the construction of the recessary to the stabilized of the recessary to the stabilized of the construction of the construction of the recessary to the stabilized of the rece

