

**PRELIMINARY DRAINAGE REPORT  
FOR  
CANYON CREEK RANCH**

**October 2024**

**Prepared For:**  
**Gregg Cawfield**  
11550 Parallax Heights  
Colorado Springs, CO 80908

**Prepared By:**  
**JR Engineering, LLC**  
5475 Tech Center Drive, Suite 235  
Colorado Springs, CO 80919  
719-593-2593

**Project No. 25322.00**  
**PCD File No. SF2434**

**ENGINEER'S STATEMENT:**

The attached drainage plan and report were prepared under my direction and supervision and are correct to the best of my knowledge and belief. Said drainage letter has been prepared according to the criteria established by El Paso County for drainage reports and said report is in conformity with the master plan of the drainage basin. I accept responsibility for any liability caused by any negligent acts, errors, or omissions on my part in preparing this report.

\_\_\_\_\_  
Bryan T. Law, Colorado P.E. # 25043  
For and On Behalf of JR Engineering, LLC

\_\_\_\_\_  
Date

**DEVELOPER'S STATEMENT:**

I, the developer, have read and will comply with all of the requirements specified in this drainage report and plan.

Business Name: Villagree Luxury Homes

By: \_\_\_\_\_

Title: \_\_\_\_\_

Address: 11550 Parallax Heights  
Colorado Springs, CO 80908





## Table of Contents

Purpose.....	1
General Site Description .....	1
General Location .....	1
Description of Property .....	1
Floodplain Statement.....	2
Existing Drainage Conditions.....	2
Major Basin Descriptions .....	2
Existing Sub-basin Drainage .....	3
Proposed Drainage Conditions .....	5
Proposed Drainage Conveyance.....	5
Proposed Sub-basin Drainage.....	5
Comparison of Flows .....	7
Drainage Path Analysis and Design .....	8
Drainage Design Criteria .....	9
Development Criteria Reference .....	9
Hydrologic Criteria.....	9
Hydraulic Criteria.....	9
Drainage Facility Design .....	10
General Concept .....	10
Specific Details.....	10
<i>Four Step Process to Minimize Adverse Impacts of Urbanization</i> .....	10
<i>Water Quality</i> .....	11
<i>Erosion Control Plan</i> .....	11
<i>Operation &amp; Maintenance</i> .....	11
<i>Drainage and Bridge Fees</i> .....	12
<i>Construction Cost Opinion</i> .....	12
Summary.....	12
References.....	13

### APPENDICES

- Appendix A – Vicinity Map, Soil Descriptions, FEMA Floodplain Map
- Appendix B – Hydrologic Calculations
- Appendix C – Hydraulic Calculations
- Appendix D – Reference Material
- Appendix E – Drainage Maps



## **PURPOSE**

---

This document is the Preliminary Drainage Report for Canyon Creek Ranch. The purpose of this report is to identify on-site and off-site drainage patterns, culverts, areas tributary to the site, and to safely route developed storm water to adequate outfall facilities.

## **GENERAL SITE DESCRIPTION**

---

### **GENERAL LOCATION**

Canyon Creek Ranch (hereby referred to as the “site”) is a proposed development with a total area of approximately 25 acres. The site is located in the SW ¼ of Section 14, Township 12 South, Range 66 West of the Sixth Principal Meridian in El Paso County, State of Colorado. The site is bounded by Kettle Creek to the north, Kettle Creek Subdivision to the east and unplatted large-lot single family residential parcels to the west and south. Refer to the vicinity map in Appendix A for additional information.

### **DESCRIPTION OF PROPERTY**

A portion of existing Kettle Creek flows from east to west in the site before flowing north and leaving the site boundary. The natural drainageways are heavily vegetated with Ponderosa Pines, native bushes and grasses. Along the northern portion of Kettle Creek, there are existing eroded banks. The remaining natural drainageways appear to be reasonably stable. The average depth from the high bank along Kettle Creek to the water level varies from 30 to 45 feet. There is also an existing single-family residence with an associated driveway and utilities located on the site.

The proposed site will be developed into three large single-family lots and one no-build lot for areas unable to be developed due to existing geographic conditions. A proposed private driveway from Creek View Lane cul-de-sac on the northeast boundary of the site will provide access to the lots that are currently undeveloped.

Soils located on the project site are Kettle gravelly loamy sand. These soils are classified as Hydrologic Soil Group B. Group B soils exhibit moderate infiltration rates when thoroughly wet, and consist mainly of moderately deep, moderately well drained to well drained soils. Refer to the soil survey map in Appendix A for additional information.

There are no known irrigation facilities located on the project site.

## **FLOODPLAIN STATEMENT**

Based on the FEMA FIRM Map number 08041C0526G and 08041C0507G, dated December 7, 2018, the majority of the site lies within Zone X. Zone X is defined as area outside the Special Flood Hazard Area (SFHA) and higher than the elevation of the 0.2-percent-annual-chance (or 500-year) flood. The existing floodplain does cross the site as well within Zone AE. Zone AE is defined as areas within the 1% annual chance flood area that have base flood elevations determined. Refer to the FIRM Map in Appendix A for additional information.

## **EXISTING DRAINAGE CONDITIONS**

---

### **MAJOR BASIN DESCRIPTIONS**

Based on the map of the Drainage Basins for El Paso County, the site lies within the Kettle Creek Drainage Basin. The Kettle Creek Drainage Basin was studied in the “Drainage Basin Planning Study for Kettle Creek Basin” by JR Engineering, dated May 2015 (see Appendix D for excerpts). The Kettle Creek originates on the southern slope of Black Forest and flows in a southwesterly direction towards the City of Colorado Springs. The Black Forest area of the watershed is dominated by ponderosa pine forest and grassland on undeveloped large lot single-family residential lots. Towards Powers Boulevard, the watershed shifts to mostly undeveloped grassland. Downstream of Powers Blvd, the watershed once again shifts to single-family residences, commercial centers, and vacant land. The Kettle Creek watershed has a contributing area of approximately 16.4 square miles at the junction with I-25.

The site specifically is located near the center of the Kettle Creek Drainage Basin, within portions of Basins 16, 17 and 18 as shown in the “Drainage Basin Planning Study for Kettle Creek Basin”. The specific Kettle Creek channel reach adjacent to the site is MS2213. There are three existing natural drainage paths that enter the site from the southeast and outfall into Kettle Creek. The natural drainage paths convey the majority of the runoff from off-site basins onto the site. The proposed driveway will cross two of the existing natural drainage paths.

The existing Kettle Creek flowing along the north side of the site will be protected through dedication of drainage/ floodplain easements on the plat. The proposed site development will provide a substantial “no-build” area buffer through dedication of wide floodplain easements along the existing Kettle Creek channel running through the site, with the intention of protecting the existing drainage corridor. Property owners need to understand that Kettle Creek is an actively flowing stream subject to potential future erosion and meandering. The wide floodplain easements dedicated in this subdivision plat are intended to provide ample setback from the drainage channel to the designated building envelope areas for the residential lots. Existing vegetated buffer strips should be protected and maintained along the downstream limits of the proposed building envelopes.

## **EXISTING SUB-BASIN DRAINAGE**

The site was analyzed to consider off-site tributary area flowing through the site to Kettle Creek from the south. The “Drainage Basin Planning Study for Kettle Creek Basin” flow values within Kettle Creek were utilized to consider the complete off-site tributary area. The existing basin delineation for the site as shown on the map within Appendix E is as follows:

Basin OS1 is approximately 1.72 acres with a 2% impervious and is comprised of existing undeveloped land that is a portion of the Kettle Creek Subdivision. Runoff generated by this basin ( $Q_5=0.5$  cfs,  $Q_{100}=3.6$  cfs) flows to the basin boundary at DPO1. Flows combine at DP1.1 within Kettle Creek in Basin EXA. Located off-site to the north of Basin OS1 is Kettle Creek Junction 12 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 12 flows in the existing condition are ( $Q_5=1,445$  cfs,  $Q_{100}=3,218$  cfs). See Appendix D for reference excerpts.

Basin OS2 is approximately 187.1 acres with a 10% impervious and is comprised of developed 5-acre single-family lots and several natural swales tributary to natural drainage path 1. Runoff generated by this basin ( $Q_5=41$  cfs,  $Q_{100}=176$  cfs) flows within the existing drainage path 1 and flow to the existing 48” CMP located on-site at DPO2. Flows combine at DP1.1 within Kettle Creek in Basin EXA.

Basin OS3 is approximately 0.24 acres with a 2% impervious and is comprised of existing undeveloped land that is a portion of the Kettle Creek Subdivision. Runoff generated by this basin ( $Q_5=0.1$  cfs,  $Q_{100}=0.7$  cfs) flows to the basin boundary at DPO3. Flows combine at DP1.1 within Kettle Creek in Basin EXA.

Basin EXA is approximately 4.39 acres with a 6% impervious and is comprised of an existing gravel driveway and a portion of the Kettle Creek drainageway. Runoff generated by this basin ( $Q_5=2.2$  cfs,  $Q_{100}=11.9$  cfs) flows to the existing Kettle Creek at DP1. Flows from DPO1-O3 and DP1 combine at DP1.1 ( $Q_5=52.5$  cfs,  $Q_{100}=194.5$  cfs) and continue flowing west within the existing Kettle Creek drainageway into Basin EXC.

Basin OS4 is approximately 2.13 acres with a 2% impervious and is comprised of existing undeveloped land that is a portion of the Kettle Creek Subdivision. Runoff generated by this basin ( $Q_5=0.7$  cfs,  $Q_{100}=5.0$  cfs) flows to the basin boundary at DPO4. Flows combine at DP2.1 within Basin EXB.

Basin EXB is approximately 3.63 acres with a 2% impervious and is comprised of a natural drainage path 2 and undeveloped land. Runoff generated by this basin ( $Q_5=1.3$  cfs,  $Q_{100}=8.4$  cfs) flows to the existing natural drainage path 2 at DP2. Flows from DPO4 and DP2 combine at DP2.1 ( $Q_5=2.0$  cfs,  $Q_{100}=12.5$  cfs) and enter into the existing triple 24” RCP. The DP2.1 flows continue to DP2.2 within Basin EXC.



Basin OS5 is approximately 163.7 acres with a 10% impervious and is comprised of developed 5-acre single-family lots and several natural swales tributary to natural drainage path 3. Runoff generated by this basin ( $Q_5=42$  cfs,  $Q_{100}=178$  cfs) flows within the existing drainage path 3 and flow to basin boundary at DPO2. Flows combine at DP3.1 within Kettle Creek in Basin EXC.

Basin EXC is approximately 9.38 acres with a 5% impervious and is comprised of an existing gravel driveway, a single-family residence, natural swales and a natural drainageway. Runoff generated by this basin ( $Q_5=4.0$  cfs,  $Q_{100}=23.2$  cfs) flows to the existing natural drainage path 3 at DP3. Flows from DP2.2, DPO5 and DP3 combine at DP3.1 ( $Q_5=100.0$  cfs,  $Q_{100}=351.8$  cfs) and continue flowing west within the existing Kettle Creek drainageway into Basin EXD. Located near DP3.1 is Kettle Creek Junction 13 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 13 flows in the existing condition are ( $Q_5=1,475$  cfs,  $Q_{100}=3,283$  cfs). See Appendix D for reference excerpts.

Basin OS6 is approximately 5.80 acres with a 2% impervious and is comprised of existing undeveloped and unplatted land to the west. Runoff generated by this basin ( $Q_5=1.9$  cfs,  $Q_{100}=12.3$  cfs) flows to the basin boundary at DPO6. Flows combine at DP4.1 within Basin EXD.

Basin EXD is approximately 3.97 acres with a 2% impervious and is comprised of natural swales and a natural drainageway. Runoff generated by this basin ( $Q_5=1.4$  cfs,  $Q_{100}=9.5$  cfs) flows to the existing natural drainageway at DP4. Flows from DP3.1, DPO6 and DP4 combine at DP4.1 ( $Q_5=101.6$  cfs,  $Q_{100}=359.9$  cfs) and continue flowing west within the existing Kettle Creek drainageway off-site to the north and combine with flows at DP5.1.

Basin OS7 is approximately 1.04 acres with a 2% impervious and is comprised of existing undeveloped and unplatted land to the west. Runoff generated by this basin ( $Q_5=0.4$  cfs,  $Q_{100}=2.8$  cfs) flows to the basin boundary at DPO7. Flows combine at DP5.1 within Basin EXE.

Basin OS8 is approximately 0.18 acres with a 2% impervious and is comprised of existing undeveloped and unplatted land to the west. Runoff generated by this basin ( $Q_5=0.1$  cfs,  $Q_{100}=0.5$  cfs) flows to the basin boundary at DPO8. Flows combine at DP5.1 within Basin EXE.

Basin EXE is approximately 3.08 acres with a 2% impervious and is comprised of natural swales and a natural drainage path. Runoff generated by this basin ( $Q_5=1.1$  cfs,  $Q_{100}=7.3$  cfs) flows to the existing natural drainageway at DP5. Flows from DP4.1, DPO7 and DP5 combine at DP5.1 ( $Q_5=102.2$  cfs,  $Q_{100}=363.5$  cfs) and continue flowing west within the existing Kettle Creek drainageway off-site to the west. Located off-site to the northwest of Basin EXE is Kettle Creek Junction 14 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 14 flows in the existing condition are ( $Q_5=1,473$  cfs,  $Q_{100}=3,281$  cfs). See Appendix D for reference excerpts.

Basin EXF is approximately 0.24 acres with a 2% impervious and is comprised of undeveloped land. Runoff generated by this basin ( $Q_5=0.1$  cfs,  $Q_{100}=0.5$  cfs) flows to the basin boundary at DP6. The DP6 flows continue flowing west off-site to the adjacent property. Eventually the runoff from this basin will flow to the existing Kettle Creek drainage way off-site to the west. Located off-site to the northwest of Basin EXF is Kettle Creek Junction 14 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 14 flows in the existing condition are ( $Q_5=1,473$  cfs,  $Q_{100}=3,281$  cfs). See Appendix D for reference excerpts.

## **PROPOSED DRAINAGE CONDITIONS**

---

### **PROPOSED DRAINAGE CONVEYANCE**

In general, developed flows will follow the historic path flowing overland and to existing natural swales and drainage paths which convey water along the historic path to Kettle Creek. In addition to the swales, the existing culverts will direct flow to Kettle Creek along the historic path. Hydraulic culverts calculations are provided to ensure flows don't overtop the roadways with flows from a 100-year storm event. Detailed drainage path calculations, sections, and culvert calculations are located in Appendix C.

### **PROPOSED SUB-BASIN DRAINAGE**

The site was analyzed to consider off-site tributary area flowing through the site to Kettle Creek from the south. The “Drainage Basin Planning Study for Kettle Creek Basin” flow values within Kettle Creek were utilized to consider the complete off-site tributary area. The proposed basin delineation for the site as shown on the map within Appendix E is as follows:

Basin OS1 is approximately 1.72 acres with a 2% impervious and is comprised of existing undeveloped land that is a portion of the Kettle Creek Subdivision. Runoff generated by this basin ( $Q_5=0.5$  cfs,  $Q_{100}=3.6$  cfs) flows to the basin boundary at DPO1. Flows combine at DP1.1 within Kettle Creek in Basin A. Located off-site to the north of Basin OS1 is Kettle Creek Junction 12 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 12 flows in the existing condition are ( $Q_5=1,445$  cfs,  $Q_{100}=3,218$  cfs). See Appendix D for reference excerpts.

Basin OS2 is approximately 187.1 acres with a 10% impervious and is comprised of developed 5-acre single-family lots and several natural swales tributary to natural drainage path 1. Runoff generated by this basin ( $Q_5=41$  cfs,  $Q_{100}=176$  cfs) flows within the existing drainage path 1 and flow to the existing 48” CMP located on-site at DPO2. Flows combine at DP1.1 within Kettle Creek in Basin A.

Basin OS3 is approximately 0.24 acres with a 2% impervious and is comprised of existing undeveloped land that is a portion of the Kettle Creek Subdivision. Runoff generated by this basin





( $Q_5=0.1$  cfs,  $Q_{100}=0.7$  cfs) flows to the basin boundary at DPO3. Flows combine at DP1.1 within Kettle Creek in Basin A.

Basin A is approximately 4.39 acres with an 8% impervious and is comprised of proposed gravel driveways and a portion of the Kettle Creek drainageway. Runoff generated by this basin ( $Q_5=2.4$  cfs,  $Q_{100}=12.2$  cfs) flows to the existing Kettle Creek at DP1. Flows from DPO1-O3 and DP1 combine at DP1.1 ( $Q_5=52.6$  cfs,  $Q_{100}=194.6$  cfs) and continue flowing west within the existing Kettle Creek drainageway into Basin C.

Basin OS4 is approximately 2.13 acres with a 2% impervious and is comprised of existing undeveloped land that is a portion of the Kettle Creek Subdivision. Runoff generated by this basin ( $Q_5=0.7$  cfs,  $Q_{100}=5.0$  cfs) flows to the basin boundary at DPO4. Flows combine at DP2.1 within Basin B.

Basin B is approximately 3.63 acres with a 2% impervious and is comprised of a natural swale and undeveloped land. Runoff generated by this basin ( $Q_5=1.3$  cfs,  $Q_{100}=8.4$  cfs) flows to the existing natural swale at DP2. Flows from DPO4 and DP2 combine at DP2.1 ( $Q_5=2.0$  cfs,  $Q_{100}=12.5$  cfs) and enter into the existing triple 24" RCP. The DP2.1 flows continue to DP2.2 within Basin C.

Basin OS5 is approximately 163.7 acres with a 10% impervious and is comprised of developed 5-acre single-family lots and several natural swales tributary to natural drainage path 3. Runoff generated by this basin ( $Q_5=42$  cfs,  $Q_{100}=178$  cfs) flows within the existing drainage path 3 and flow to basin boundary at DPO2. Flows combine at DP3.1 within Kettle Creek in Basin C.

Basin C is approximately 9.38 acres with a 5% impervious and is comprised of proposed gravel driveways, a single-family residence, natural swales and a natural drainageway. Runoff generated by this basin ( $Q_5=4.0$  cfs,  $Q_{100}=23.2$  cfs) flows to the existing natural swale at DP3. Flows from DP2.2, DPO5 and DP3 combine at DP3.1 ( $Q_5=100.2$  cfs,  $Q_{100}=351.9$  cfs) and continue flowing west within the existing Kettle Creek drainageway into Basin D. Located near DP3.1 is Kettle Creek Junction 13 as described in the "Drainage Basin Planning Study for Kettle Creek Basin". Junction 13 flows in the existing condition are ( $Q_5=1,475$  cfs,  $Q_{100}=3,283$  cfs). See Appendix D for reference excerpts.

Basin OS6 is approximately 5.80 acres with a 2% impervious and is comprised of existing undeveloped and unplatted land to the west. Runoff generated by this basin ( $Q_5=1.9$  cfs,  $Q_{100}=12.3$  cfs) flows to the basin boundary at DPO6. Flows combine at DP4.1 within Basin D.

Basin D is approximately 3.97 acres with a 2% impervious and is comprised of natural swales and a natural drainageway. Runoff generated by this basin ( $Q_5=1.4$  cfs,  $Q_{100}=9.5$  cfs) flows to the existing natural drainageway at DP4. Flows from DP3.1, DPO6 and DP4 combine at DP4.1 ( $Q_5=101.7$  cfs,  $Q_{100}=360.0$  cfs) and continue flowing west within the existing Kettle Creek drainageway off-site to the north and combine with flows at DP5.1.



Basin OS7 is approximately 1.04 acres with a 2% impervious and is comprised of existing undeveloped and unplatted land to the west. Runoff generated by this basin ( $Q_5=0.4$  cfs,  $Q_{100}=2.8$  cfs) flows to the basin boundary at DPO7. Flows combine at DP5.1 within Basin E.

Basin OS8 is approximately 0.18 acres with a 2% impervious and is comprised of existing undeveloped and unplatted land to the west. Runoff generated by this basin ( $Q_5=0.1$  cfs,  $Q_{100}=0.5$  cfs) flows to the basin boundary at DPO8. Flows combine at DP5.1 within Basin E.

Basin E is approximately 3.08 acres with a 2% impervious and is comprised of natural swales and a natural drainageway. Runoff generated by this basin ( $Q_5=1.1$  cfs,  $Q_{100}=7.3$  cfs) flows to the existing natural drainageway at DP5. Flows from DP4.1, DPO7 and DP5 combine at DP5.1 ( $Q_5=102.3$  cfs,  $Q_{100}=363.6$  cfs) and continue flowing west within the existing Kettle Creek drainageway off-site to the west. Located off-site to the northwest of Basin E is Kettle Creek Junction 14 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 14 flows in the existing condition are ( $Q_5=1,473$  cfs,  $Q_{100}=3,281$  cfs). See Appendix D for reference excerpts.

Basin F is approximately 0.24 acres with a 2% impervious and is comprised of undeveloped land. Runoff generated by this basin ( $Q_5=0.1$  cfs,  $Q_{100}=0.5$  cfs) flows to the basin boundary at DP6. The DP6 flows continue flowing west off-site to the adjacent property. Eventually the runoff from this basin will flow to the existing Kettle Creek drainageway off-site to the west. Located off-site to the northwest of Basin F is Kettle Creek Junction 14 as described in the “Drainage Basin Planning Study for Kettle Creek Basin”. Junction 14 flows in the existing condition are ( $Q_5=1,473$  cfs,  $Q_{100}=3,281$  cfs). See Appendix D for reference excerpts.

## COMPARISON OF FLOWS

There are several locations where the existing and proposed flows enter Kettle Creek from the site:

- Flows enter into Kettle Creek at existing DP1.1 and proposed DP1.1. Existing DP1.1 flows ( $Q_5=52.5$  cfs,  $Q_{100}=194.5$  cfs) are slightly less compared to the proposed DP1.1 flows ( $Q_5=52.6$  cfs,  $Q_{100}=194.6$  cfs). The calculated flow increase is  $Q_5=0.1$  cfs and  $Q_{100}=0.1$  cfs.
- Flows enter into Kettle Creek at existing DP2.2 and proposed DP2.2. Existing DP2.2 flows ( $Q_5=53.4$  cfs,  $Q_{100}=199.6$  cfs) are slightly less compared to the proposed DP2.2 flows ( $Q_5=53.5$  cfs,  $Q_{100}=199.7$  cfs). The calculated flow increase is  $Q_5=0.1$  cfs and  $Q_{100}=0.1$  cfs.
- Flows enter into Kettle Creek at existing DP3.1 and proposed DP3.1. Existing DP3.1 flows ( $Q_5=100.0$  cfs,  $Q_{100}=351.8$  cfs) are slightly less compared to the proposed DP3.1 flows ( $Q_5=100.2$  cfs,  $Q_{100}=351.9$  cfs). The calculated flow increase is  $Q_5=0.2$  cfs and  $Q_{100}=0.1$  cfs.



- Flows enter into Kettle Creek at existing DP4.1 and proposed DP4.1. Existing DP4.1 flows ( $Q_5=101.6$  cfs,  $Q_{100}=359.9$  cfs) are slightly less compared to the proposed DP4.1 flows ( $Q_5=101.7$  cfs,  $Q_{100}=360.0$  cfs). The calculated flow increase is  $Q_5=0.1$  cfs and  $Q_{100}=0.1$  cfs.
- Flows enter into Kettle Creek at existing DP5.1 and proposed DP5.1. Existing DP5.1 flows ( $Q_5=102.2$  cfs,  $Q_{100}=363.5$  cfs) are slightly less compared to the proposed DP5.1 flows ( $Q_5=102.3$  cfs,  $Q_{100}=363.6$  cfs). The calculated flow increase is  $Q_5=0.1$  cfs and  $Q_{100}=0.1$  cfs.

The flow increases in the proposed condition are slight and would not modify the existing drainage patterns. Therefore, there is no negative impact anticipated to downstream properties.

### **DRAINAGE PATH ANALYSIS AND DESIGN**

There are several large drainage paths that traverse the site from south to north. Existing drainage path 1 leads to the existing 48” CMP culvert crossing the proposed driveway. Existing drainage path 2 leads to the existing triple 24” CMP culvert crossing the proposed driveway. On September 30, 2024, a site visit documented the existing state of the drainage paths and Kettle Creek. See Appendix D for an exhibit showing the existing images.

The two drainage paths and culvert crossings were analyzed to determine the channel stability. In conformance with the “Drainage Basin Planning Study for Kettle Creek Basin” by JR Engineering, Manning’s roughness coefficient of 0.100 was used when analyzing the channel bottom and 0.030 on the sides which have less vegetation cover. The modeled results of the drainage path 1 and drainage path can be found in Appendix C. See Table 1 below for channel design parameters.

**Table 1:** Channel Design Parameters

<b>Design Parameter</b>	<b>Erosive Soils or Poor Vegetation</b>	<b>Erosive Resistant Soils and Vegetation</b>
Max Low-flow Velocity (ft/s)	3.5	5.0
Max 100-year Velocity (ft/s)	5.0	7.0
Froude Number Low Flow	0.5	0.7
Froude Number 100-year Flow	0.6	0.9

For drainage path 1, the GeoHECRAS model determined that the existing channel has stable average velocities, with isolated instances of high velocities, ranging from 0.2 fps to 6.2 fps. Velocities are allowable based on the max stable velocity of 7 fps for erosion resistant channels, per Table 8-1 from USDCM. In the evaluated drainage path 1 model, there are no instances where the Froude number exceeds the El Paso County maximum of 0.90.

For drainage path 2, the GeoHECRAS model determined that the existing channel has stable average velocities, with isolated instances of high velocities, ranging from 0.6 fps to 6.6 fps. Velocities are allowable based on the max stable velocity of 7 fps for erosion resistant channels, per Table 8-1 from



USDCM. In the evaluated drainage path 2 model, there are four instances where the Froude number exceeds the El Paso County maximum of 0.90. Three of those instances are located at the southeast corner of the property where the drainage path comes onto the property. The last instance is located about mid-way through drainage path 2. As shown in the site visit exhibit, this drainage path 2 has sandstone located on the deep channel banks, which limits the erosion potential.

## **DRAINAGE DESIGN CRITERIA**

---

### **DEVELOPMENT CRITERIA REFERENCE**

Storm drainage analysis and design criteria for this project were taken from the “City of Colorado Springs/El Paso County Drainage Criteria Manual” Volumes 1 and 2 (EPCDCM), dated October 12, 1994, the “Urban Storm Drainage Criteria Manual” Volumes 1 to 3 (USDCM) and Chapter 6 and Section 3.2.1 of Chapter 13 of the “Colorado Springs Drainage Criteria Manual” (CSDCM), dated May 2014, as adopted by El Paso County.

### **HYDROLOGIC CRITERIA**

All hydrologic data was obtained from the “El Paso Drainage Criteria Manual” Volumes 1 and 2, and the “Urban Storm Drainage Criteria Manual” Volumes 1, 2, and 3. On-site drainage improvements were designed based on the 5-year (minor) storm event and the 100-year (major) storm event. Runoff (for basins under 100 acres) was calculated using the Rational Method, and rainfall intensities for the 5-year and the 100-year storm return frequencies were obtained from Table 6-2 of the CSDCM. One-hour point rainfall data for the storm events is identified in the chart below. Runoff coefficients were determined based on proposed land use and from data in Table 6-6 from the CSDCM. Runoff (for basins greater than 100 acres) were calculated using the Colorado Unit Hydrograph Procedure (CUHP) as specified in EPCDCM Section 5.1. Time of concentrations were developed using equations from CSDCM. All runoff calculations and applicable charts and graphs are included in the Appendices.

**Table 2: 1-hr Point Rainfall Data**

<b>Storm</b>	<b>Rainfall (in.)</b>
5-year	1.50
100-year	2.52

### **HYDRAULIC CRITERIA**

The Rational Method and USDCM’s SF-2 and SF-3 forms were used to determine the runoff from the minor and major storms on the site. Autodesk Inc.’s Hydraflow Express Extension (Volume 10.5) was used to size the roadside ditches and drainage swales per criteria. Per Section 6.4.1 of the EPCDCM, culverts were sized as to not overtop the road in the 100-year storm. CivilGEO Inc.’s GeoHECRAS was used to analyze the existing drainage paths that have proposed roadway crossings.



See Appendix C for hydraulic calculations. The hydraulic design will be finalized with the Final Drainage Report.

## **DRAINAGE FACILITY DESIGN**

---

### **GENERAL CONCEPT**

The proposed stormwater conveyance system was designed to follow the historic drainage paths and thus minimize the possibility of adverse effects downstream. Due to this, there are no drainage problems anticipated downstream of the site.

### **SPECIFIC DETAILS**

#### ***Four Step Process to Minimize Adverse Impacts of Urbanization***

In accordance with the El Paso County Drainage Criteria Manual Volume 2, this site has implemented the four-step process to minimize adverse impacts of urbanization. The four-step process includes reducing runoff volumes, treating the water quality capture volume (WQCV), stabilizing drainage ways, and implementing long-term source controls.

**Step 1: Reducing Runoff Volumes** - The site development consists of minimal gravel drive aisles to provide access for the single-family residences within the development. This layout will allow for increased infiltration and reduce runoff volume as the amount of development is limited.

**Step 2: Treat the WQCV** - Runoff from this development is treated through capture and slow release of the WQCV in the on-site permanent full-spectrum EDBs that are designed per current El Paso County drainage criteria. The 2.5-acre (minimum) residential houses on Lot 2-4 will be limited to a maximum of 10% imperviousness to meet the requirements of Section I.7.1.B.5 of the ECM Stormwater Quality Policy and Procedure for water quality through a plat note. Should Lot 2-4 exceed 10% imperviousness, a lot specific drainage report addressing the increased imperviousness must be submitted.

**Step 3: Stabilize Drainageways** – The site lies within the Kettle Creek Drainage. The drainage fees for Kettle Creek are identified in the tables within the Drainage and Bridge Fees section below. All existing natural drainage paths and the Kettle Creek drainageway will remain as is. The vegetation for each drainage path included medium height prairie grasses and small ponderosa pine trees. The site does not significantly affect the discharge directly into the open drainageway of Kettle Creek; therefore, no downstream stabilization will be required with this project.

**Step 4: Implementing Long Term Source Controls** - A site specific stormwater quality and erosion control plan and narrative shall be prepared in conjunction with the final drainage report. Site specific temporary source control BMPs as well as permanent BMP's will be detailed in that plan and narrative to protect receiving waters.



***Water Quality***

As previously stated, the applicable exclusions for Basins A-D located within Lot 2-4 fall under Section I.7.1.B.5 of the ECM Stormwater Quality Policy and Procedure for areas with large single-family lots (2.5-acre min.). In addition, Basins E-F fall under the Section I.7.1.B.7 of the ECM Stormwater Quality Policy and Procedure for sites with land disturbance to undeveloped land that will remain undeveloped. See Table 3 below for the water quality treatment summary table indicating which basins are treated and which are excluded.

**Table 3:** Water Quality Treatment Summary Table

PBMP Summary Table		
Basins	Tributary Area (acres)	PBMP
A-D	21.37	EXCLUDED*
E-F	3.32	EXCLUDED**
*EXCLUDED BASED ON LARGE LOT SINGLE FAMILY SITES PER ECM APP. I.7.B.5 **EXCLUDED BASED ON LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED PER ECM APP. I.7.B.7		

***Erosion Control Plan***

We respectfully request that the Final Erosion Control Plan and associated Cost Estimate to be submitted in conjunction with the construction drawings and plat prior to obtaining a grading permit.

***Operation & Maintenance***

In order to ensure the function and effectiveness of the stormwater infrastructure, maintenance activities such as; inspection, routine maintenance, restorative maintenance, rehabilitation, and repair are required. All proposed drainage structures within easements (drainageway culverts and drainageway improvements) will be owned and maintained by the property owner unless another party accepts such responsibility in writing and responsibility is properly assigned through legal documentation. Inspection access for El Paso County will be provided through a maintenance easement.

***Drainage and Bridge Fees***

The site lies within the Kettle Creek Drainage Basin. See Table 4 and 5 for the calculated fees per impervious acre:

**Table 4: Kettle Creek Impervious Acres**

<b>Canyon Creek Ranch - Impervious Area Calculation</b>			
Breakdown	Area (acres)	% Impervious	Impervious Acres
Impervious Area	2.9283	80%	2.34
Tracts A & B - Open Space	2.4158	2%	0.05
Total	5.3441		2.39
Total w/o Tracts*	2.9283		<b>2.34</b>
*Drainage fees are not paid for tracts, therefore the area excludes Tract A&B			

**Table 5: Kettle Creek Drainage Basin fees.**

<b>2024 Drainage and Bridge Fee – Canyon Creek Ranch</b>				
Impervious Acres (ac.)	Kettle Creek Drainage Fee (Per Imp. Acre)	Kettle Creek Bridge Fee (Per Imp. Acre)	Canyon Creek Ranch Drainage Fee	Canyon Creek Ranch Bridge Fee
2.34	\$13,410	\$0	\$31,414.80	\$0.00

***Construction Cost Opinion***

A construction cost opinion for the drainage infrastructure will be provided in conjunction with the construction drawings and plat prior to obtaining a grading permit.

**SUMMARY**

The proposed Canyon Creek Ranch drainage improvements were designed to meet or exceed the El Paso County Drainage Criteria. The proposed development will not adversely affect the off-site drainageways or surrounding developments. This report is in conformance and meets the latest El Paso County Storm Drainage Criteria requirements for this site.



## REFERENCES

---

1. Engineering Criteria Manual, El Paso County, October 14, 2020.
  2. City of Colorado Springs Drainage Criteria Manual: Volume 1, City of Colorado Springs, CO, May 2014.
  3. Urban Storm Drainage Criteria Manual: Volume 1, 2 and 3, Urban Drainage and Flood Control District, Latest Revisions.
  4. “Soil Survey of El Paso County Area, Colorado,” by the USDA Natural Resources Conservation Service.
  5. Drainage Basin Planning Study for Kettle Creek Basin, prepared by JR Engineering LLC and dated May 5, 2015.
  6. Existing On-Site Drainage and Kettle Creek, prepared by JR Engineering LLC and dated September 30, 2024.
-

**Appendix A**  
**Vicinity Map, Soil Descriptions, FEMA Floodplain Map**



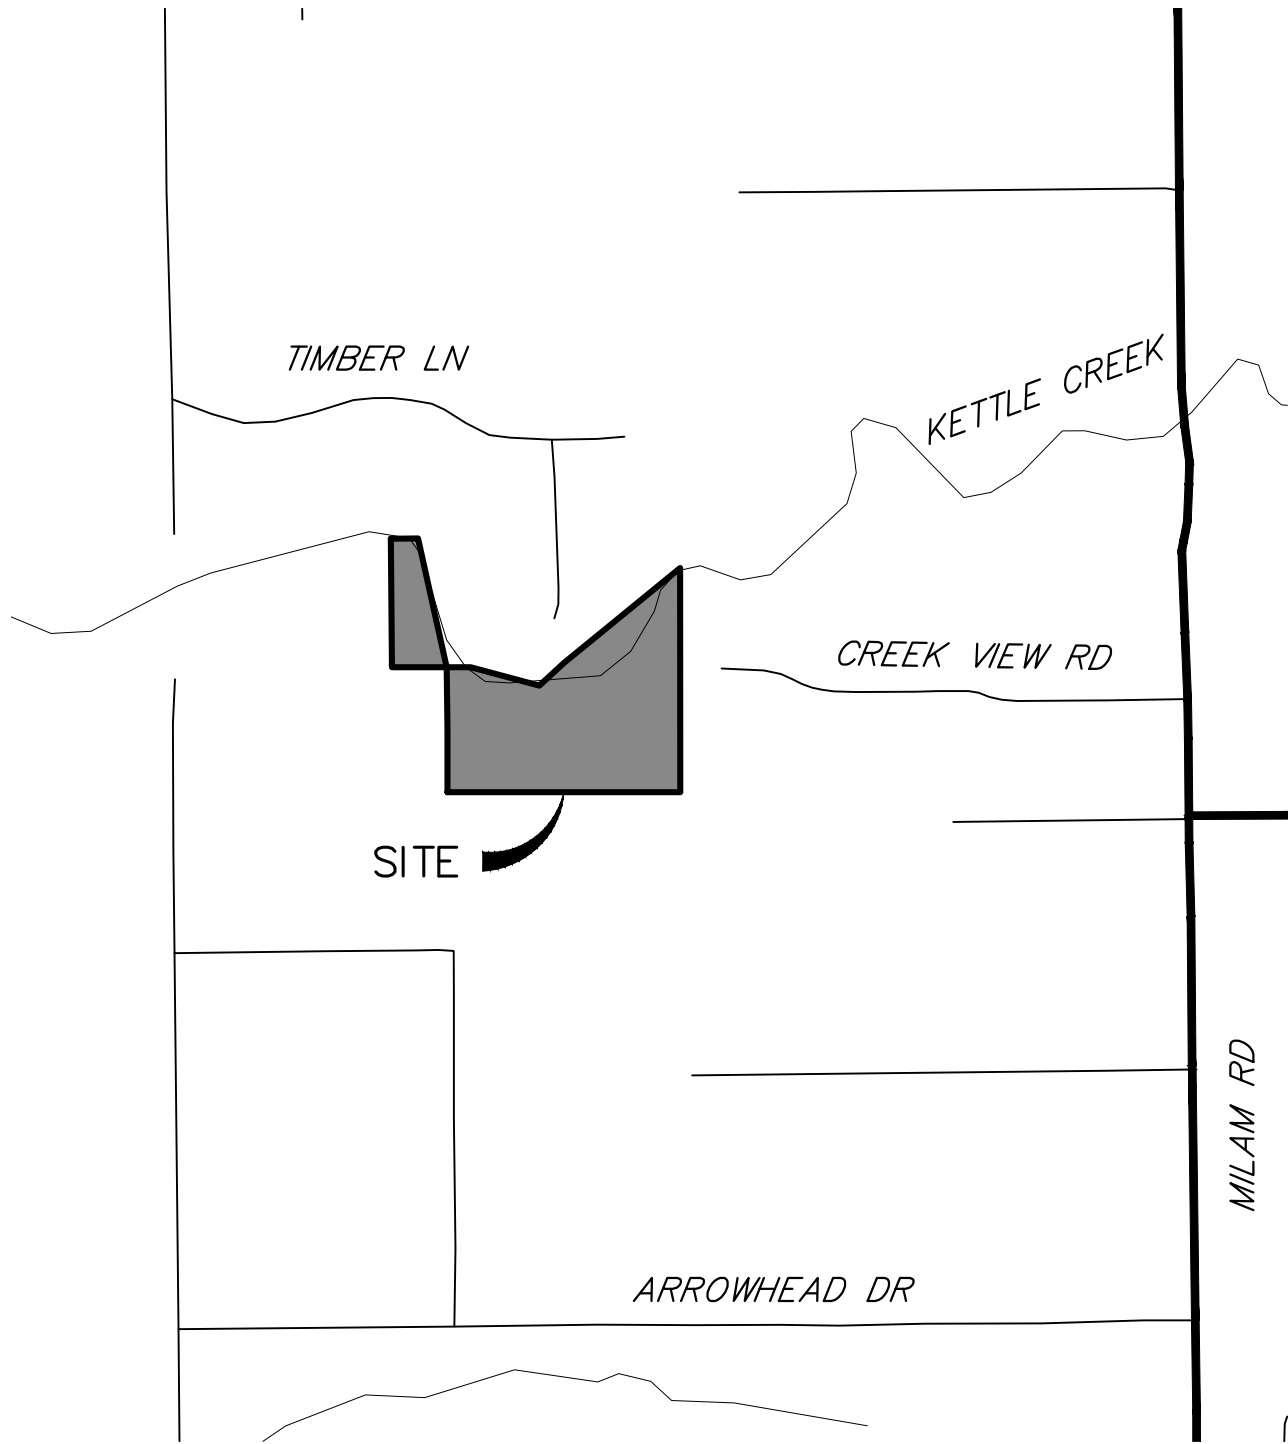


CANYON CREEK DEVELOPMENT  
 VICINITY MAP  
 2000-5322.00  
 09-26-2024  
 SHEET 1 OF 1



Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • [www.jrengineering.com](http://www.jrengineering.com)




Hydrologic Soil Group—El Paso County Area, Colorado

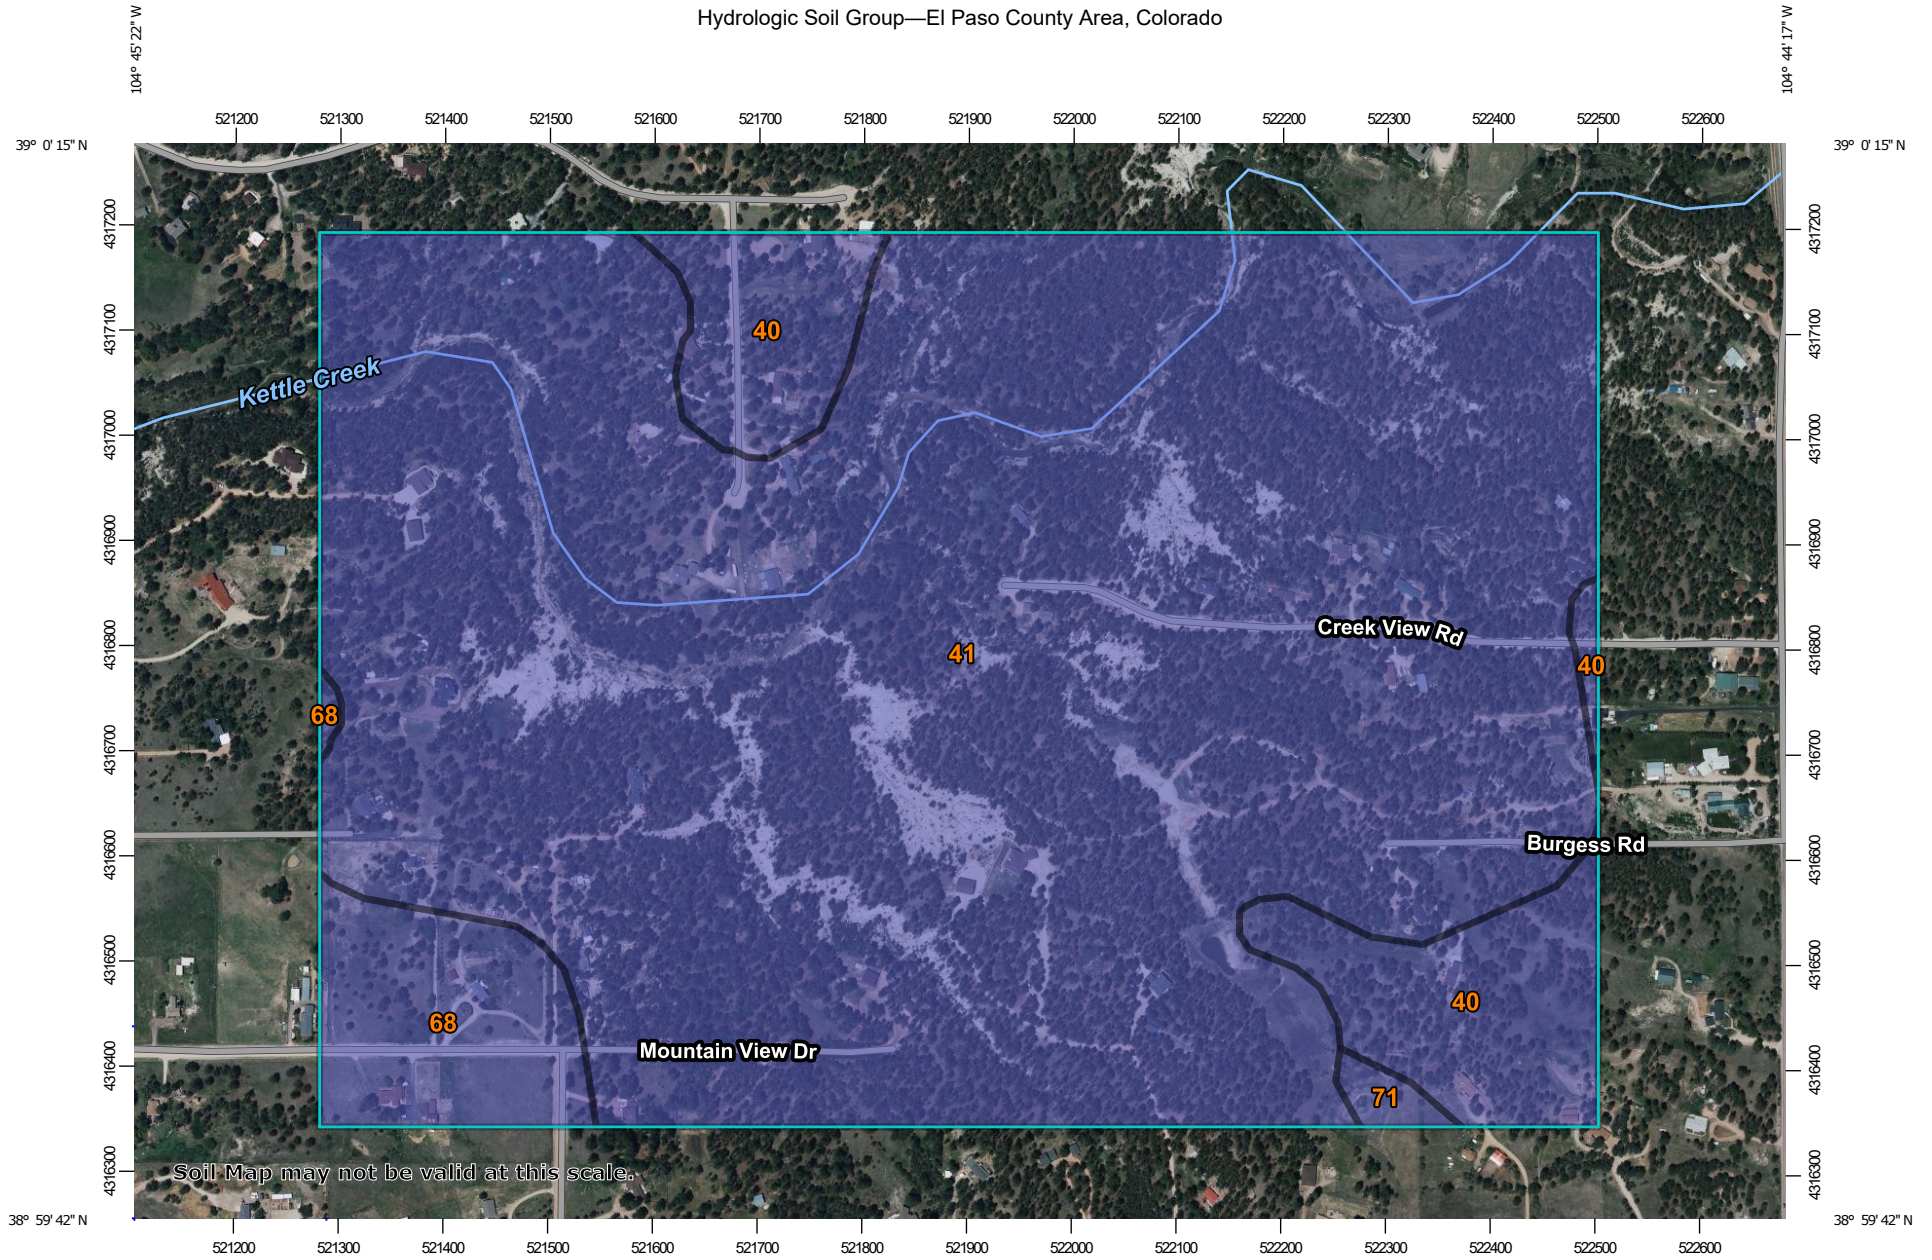


Soil Map may not be valid at this scale.

Map Scale: 1:7,210 if printed on A landscape (11" x 8.5") sheet.



### MAP LEGEND

**Area of Interest (AOI)**









 Area of Interest (AOI)

**Soils**

**Soil Rating Polygons**

-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available

**Soil Rating Lines**

-  A
-  A/D
-  B
-  B/D
-  C
-  C/D
-  D
-  Not rated or not available

**Soil Rating Points**






-  A
-  A/D
-  B
-  B/D

-  C
-  C/D
-  D
-  Not rated or not available

**Water Features**

 Streams and Canals

**Transportation**

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

**Background**

 Aerial Photography

### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

**Warning:** Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL:  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: El Paso County Area, Colorado  
 Survey Area Data: Version 21, Aug 24, 2023

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 9, 2021—Jun 12, 2021

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
40	Kettle gravelly loamy sand, 3 to 8 percent slopes	B	21.9	8.5%
41	Kettle gravelly loamy sand, 8 to 40 percent slopes	B	222.0	86.1%
68	Peyton-Pring complex, 3 to 8 percent slopes	B	12.7	4.9%
71	Pring coarse sandy loam, 3 to 8 percent slopes	B	1.2	0.5%
<b>Totals for Area of Interest</b>			<b>257.7</b>	<b>100.0%</b>

## Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

## Rating Options

*Aggregation Method:* Dominant Condition

*Component Percent Cutoff:* None Specified

*Tie-break Rule:* Higher



**NOTES TO USERS**

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

**Coastal Base Flood Elevations** shown on this map apply only to landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services  
NOAA, NNGS12  
National Geodetic Survey  
SSMC-3, #9202  
1315 East-West Highway  
Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

**Base Map** information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, City of Fountain, Bureau of Land Management, National Oceanic and Atmospheric Administration, United States Geological Survey, and Anderson Consulting Engineers, Inc. These data are current as of 2006.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

**Corporate limits** shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels, community map repository addresses, and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.


Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FMIX) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at <http://www.msc.fema.gov/>.

If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call 1-877-FEMA MAP (1-877-336-2627) or visit the FEMA website at <http://www.fema.gov/business/nfp/>.

**El Paso County Vertical Datum Offset Table**


Flooding Source	Vertical Datum Offset (ft)
REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION	

**Panel Location Map**



This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).

Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.

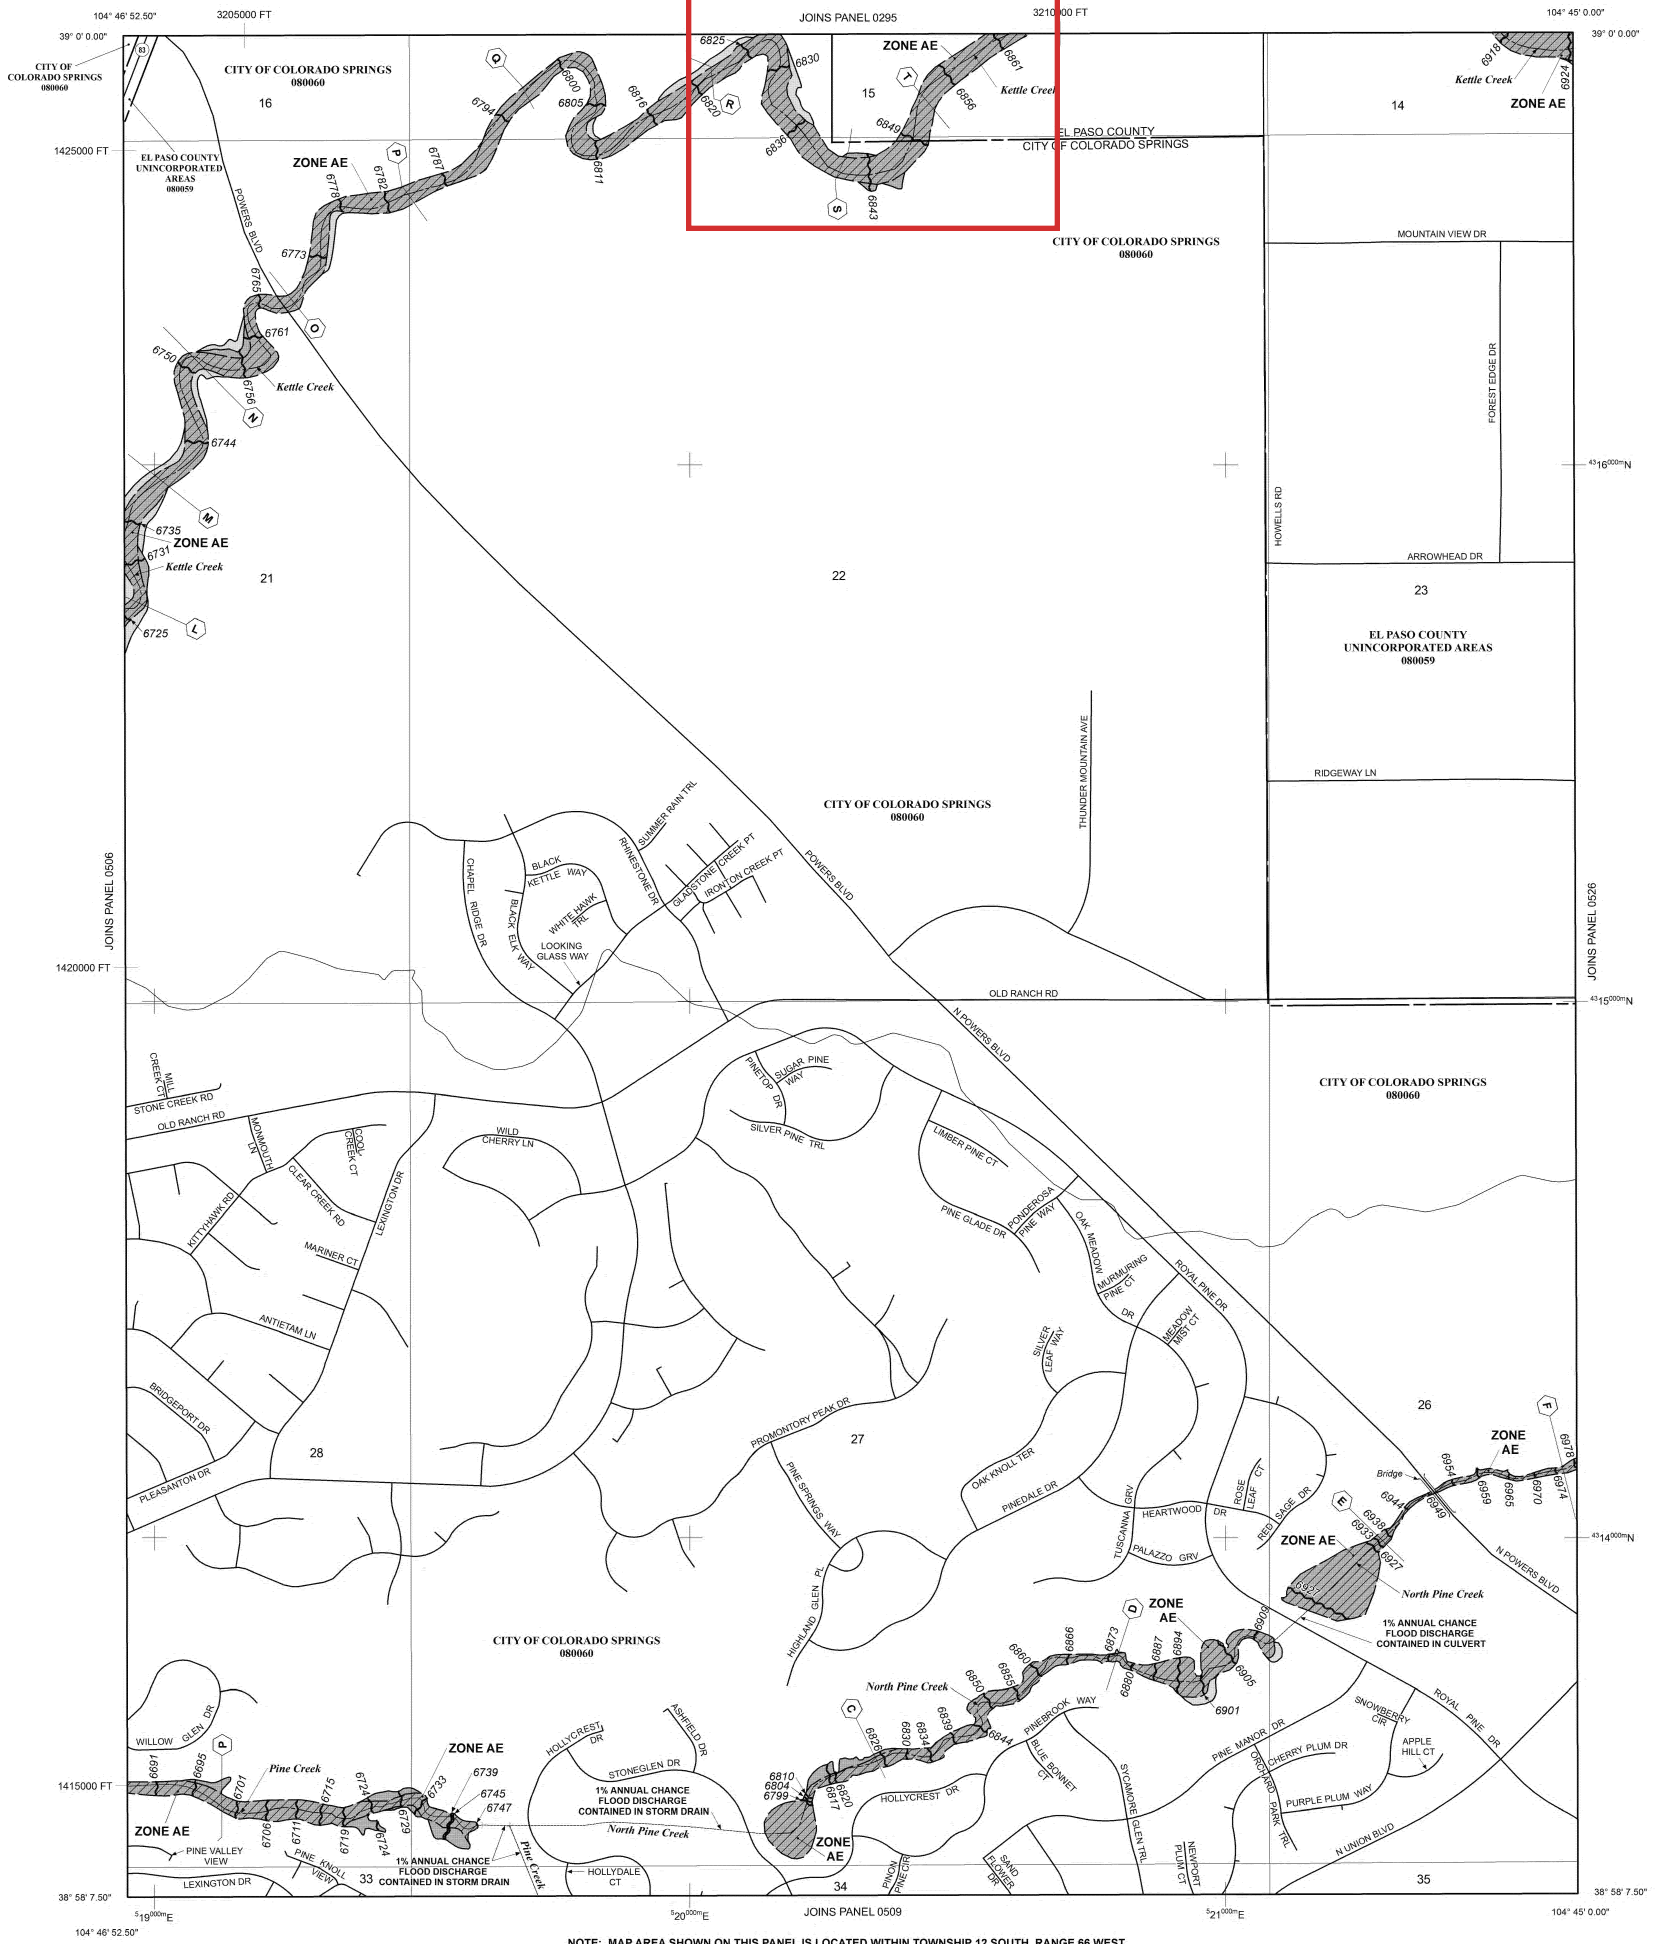

NOTE: MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 12 SOUTH, RANGE 66 WEST.

**LEGEND**

**SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD**

- ZONE A** No Base Flood Elevations determined.
  - ZONE AE** Base Flood Elevations determined.
  - ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.
  - ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.
  - ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
  - ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.
  - ZONE V** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.
  - ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.
- FLOODWAY AREAS IN ZONE AE**
- The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.
- OTHER FLOOD AREAS**
- ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.
- OTHER AREAS**
- ZONE X** Areas determined to be outside the 0.2% annual chance floodplain.
  - ZONE D** Areas in which flood hazards are undetermined, but possible.
- COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS**
- OTHERWISE PROTECTED AREAS (OPAs)**

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.

- Floodplain boundary
  - Floodway boundary
  - Zone D boundary
  - CBRS and OPA boundary
  - Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations; flood depths or flood velocities.
  - ~ 51.3 (EL 987) ~ Base Flood Elevation line and value; elevation in feet\*  
Base Flood Elevation value where uniform within zone; elevation in feet\*
- \* Referenced to the North American Vertical Datum of 1988 (NAVD 88)
- (A) (A) Cross section line
  - (23) (23) Transect line
  - 97° 07' 30.00" 32° 22' 30.00" Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)
  - 42° 52' 00" N 1000-meter Universal Transverse Mercator grid ticks, zone 13
  - 6000000 FT 5000-foot grid ticks: Colorado State Plane coordinate system, central zone (FIPS20NE 0502), Lambert Conformal Conic Projection
  - DX5510 Bench mark (see explanation in Notes to Users section of this FIRM page)
  - M1.5 River Mile


MAP REPOSITORIES  
Refer to Map Repositories list on Map Index

EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP  
**MARCH 17, 1997**

EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL  
**DECEMBER 7, 2018** - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision.

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.



**NFP** **PANEL 0507G**

**FIRM**  
FLOOD INSURANCE RATE MAP  
**EL PASO COUNTY, COLORADO AND INCORPORATED AREAS**

**PANEL 507 OF 1300**  
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

COMMUNITY	NUMBER	PANEL	SUFFIX
COLORADO SPRINGS, CITY OF	080050	0507	G
EL PASO COUNTY	080028	0507	G

Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

**MAP NUMBER 08041C0507G**

**MAP REVISED DECEMBER 7, 2018**

Federal Emergency Management Agency

**NOTES TO USERS**

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The community map repository should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations (BFEs)** and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

**Coastal Base Flood Elevations** shown on this map apply only landward of 0.0' North American Vertical Datum of 1988 (NAVD88). Users of this FIRM should be aware that coastal flood elevations are also provided in the Summary of Stillwater Elevations table in the Flood Insurance Study report for this jurisdiction. Elevations shown in the Summary of Stillwater Elevations table should be used for construction and/or floodplain management purposes when they are higher than the elevations shown on this FIRM.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to section 2.4 "Flood Protection Measures" of the Flood Insurance Study report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Universal Transverse Mercator (UTM) zone 13. The **horizontal datum** was NAD83, GRS80 spheroid. Differences in datum, spheroid, projection or UTM zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the **North American Vertical Datum of 1988 (NAVD88)**. These flood elevations must be compared to structure and ground elevations referenced to the same **vertical datum**. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

NGS Information Services  
 NOAA, NNGS12  
 National Geodetic Survey  
 SSMC-3, #9202  
 1315 East-West Highway  
 Silver Spring, MD 20910-3282

To obtain current elevation, description, and/or location information for **bench marks** shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242 or visit its website at <http://www.ngs.noaa.gov/>.

**Base Map** information shown on this FIRM was provided in digital format by El Paso County, Colorado Springs Utilities, and Anderson Consulting Engineers, Inc. These data are current as of 2008.

This map reflects more detailed and up-to-date **stream channel configurations and floodplain delineations** than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on this map. The profile baselines depicted on this map represent the hydraulic modeling baselines that match the flood profiles and Floodway Data Tables if applicable, in the FIS report. As a result, the profile baselines may deviate significantly from the new base map channel representation and may appear outside of the floodplain.

**Corporate limits** shown on this map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed **Map Index** for an overview map of the county showing the layout of map panels, community map repository addresses, and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community is located.

Contact **FEMA Map Service Center (MSC)** via the FEMA Map Information eXchange (FMIX) 1-877-336-2627 for information on available products associated with this FIRM. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. The MSC may also be reached by Fax at 1-800-358-9620 and its website at <http://www.msc.fema.gov/>.


If you have **questions about this map** or questions concerning the National Flood Insurance Program in general, please call **1-877-FEMA MAP** (1-877-336-2627) or visit the FEMA website at <http://www.fema.gov/business/mfp>.

**El Paso County Vertical Datum Offset Table**

Flooding Source	Vertical Datum Offset (ft)

REFER TO SECTION 3.3 OF THE EL PASO COUNTY FLOOD INSURANCE STUDY FOR STREAM BY STREAM VERTICAL DATUM CONVERSION INFORMATION

**Panel Location Map**



This Digital Flood Insurance Rate Map (DFIRM) was produced through a Cooperating Technical Partner (CTP) agreement between the State of Colorado Water Conservation Board (CWCB) and the Federal Emergency Management Agency (FEMA).

Additional Flood Hazard information and resources are available from local communities and the Colorado Water Conservation Board.



NOTE: MAP AREA SHOWN ON THIS PANEL IS LOCATED WITHIN TOWNSHIP 12 SOUTH, RANGE 65 WEST, AND TOWNSHIP 12 SOUTH, RANGE 66 WEST.

**LEGEND**

**SPECIAL FLOOD HAZARD AREAS (SFHAS) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD**

The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equaled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.

- ZONE A** No Base Flood Elevations determined.
- ZONE AE** Base Flood Elevations determined.
- ZONE AH** Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations determined.
- ZONE AO** Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average depths determined. For areas of alluvial fan flooding, velocities also determined.
- ZONE AR** Special Flood Hazard Area Formerly protected from the 1% annual chance flood by a flood control system that was subsequently derelict. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
- ZONE A99** Area to be protected from 1% annual chance flood by a Federal flood protection system under construction; no Base Flood Elevations determined.
- ZONE V** Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations determined.
- ZONE VE** Coastal flood zone with velocity hazard (wave action); Base Flood Elevations determined.

**FLOODWAY AREAS IN ZONE AE**

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights.

**OTHER FLOOD AREAS**

**ZONE X** Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.

**OTHER AREAS**

- ZONE X** Areas determined to be outside the 0.2% annual chance floodplain.
- ZONE D** Areas in which flood hazards are undetermined, but possible.

**COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS**

**OTHERWISE PROTECTED AREAS (OPAs)**

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas.

- Floodplain boundary
- Floodway boundary
- Zone D boundary
- ..... CBRS and OPA boundary
- Boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths or flood velocities.
- ~ 513 ~ Base Flood Elevation line and value; elevation in feet\* (EL 987)
- ~ ~ ~ Base Flood Elevation value where uniform within zone; elevation in feet\*


\* Referenced to the North American Vertical Datum of 1988 (NAVD 88)

- (A)---(A) Cross section line
- (23)---(23) Transect line
- 97° 07' 30.00" 32° 22' 30.00" Geographic coordinates referenced to the North American Datum of 1983 (NAD 83)
- 42°50'00"N 1000-meter Universal Transverse Mercator grid ticks, zone 13
- 6000000 FT 5000-foot grid ticks: Colorado State Plane coordinate system, central zone (FIPSZONE 0502), Lambert Conformal Conic Projection
- DX5510 Bench mark (see explanation in Notes to Users section of this FIRM page)
- M1.5 River Mile

**MAP REPOSITORIES**  
 Refer to Map Repositories list on Map Index  
**EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP**  
**MARCH 17, 1997**  
**EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL**  
**DECEMBER 7, 2018** - to update corporate limits, to change Base Flood Elevations and Special Flood Hazard Areas, to update map format, to add roads and road names, and to incorporate previously issued Letters of Map Revision.

For community map revision history prior to countywide mapping, refer to the Community Map History Table located in the Flood Insurance Study report for this jurisdiction.

To determine if flood insurance is available in this community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.



**NFP** **PANEL 0526G**

**FIRM**  
**FLOOD INSURANCE RATE MAP**  
**EL PASO COUNTY, COLORADO AND INCORPORATED AREAS**

**PANEL 526 OF 1300**  
 (SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

COMMUNITY	NUMBER	PANEL	SUFFIX
COLORADO SPRINGS, CITY OF	080059	0526	G
EL PASO COUNTY	080059	0526	G

Notice to User: The Map Number shown below should be used when placing map orders. The Community Number shown above should be used on insurance applications for the subject community.

**MAP NUMBER**  
**08041C0526G**

**MAP REVISED**  
**DECEMBER 7, 2018**  
 Federal Emergency Management Agency

## **Appendix B**

### **Hydrologic Calculations**

## PRE-DEVELOPMENT COMPOSITE % IMPERVIOUS & COMPOSITE RUNOFF COEFFICIENT CALCULATIONS

Subdivision: Canyon Creek Ranch  
 Location: El Paso County

Project Name: Canyon Creek Ranch  
 Project No.: 25322.00  
 Calculated By: GAG  
 Checked By: \_\_\_\_\_  
 Date: 10/8/24

Basin ID	Total Area (ac)	Rural 5-Acre Lots (10% Impervious)				Roofs (90% Impervious)				Streets-Gravel (80% Impervious)				Historical Analysis (2% Impervious)				Basins Total Weighted C Values		Basins Total Weighted % Imp.
		C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	
EXA	4.39	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.22	4.0%	0.09	0.36	4.17	1.9%	0.12	0.38	5.9%
EXB	3.63	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	3.63	2.0%	0.09	0.36	2.0%
EXC	9.38	0.16	0.41	0.00	0.0%	0.73	0.81	0.10	1.0%	0.59	0.70	0.19	1.6%	0.09	0.36	9.09	1.9%	0.11	0.37	4.5%
EXD	3.97	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	3.97	2.0%	0.09	0.36	2.0%
EXE	3.08	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	3.08	2.0%	0.09	0.36	2.0%
EXF	0.24	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.24	2.0%	0.09	0.36	2.0%
OS1	1.72	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	1.72	2.0%	0.09	0.36	2.0%
OS2	187.1	0.16	0.41	187.1	10.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.00	0.0%	0.16	0.41	10.0%
OS3	0.24	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.24	2.0%	0.09	0.36	2.0%
OS4	2.13	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	2.13	2.0%	0.09	0.36	2.0%
OS5	163.7	0.16	0.41	163.7	10.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.00	0.0%	0.16	0.41	10.0%
OS6	5.80	0.16	0.41	0.00	0.0%	0.73	0.81	0.01	0.2%	0.59	0.70	0.00	0.0%	0.09	0.36	5.79	2.0%	0.09	0.36	2.2%
OS7	1.04	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	1.04	2.0%	0.09	0.36	2.0%
OS8	0.18	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.18	2.0%	0.09	0.36	2.0%
TOTAL ON-SITE	24.69																			3.7%
TOTAL OFF-SITE	360.2																			9.8%



**PRE-DEVELOPMENT  
STANDARD FORM SF-2  
TIME OF CONCENTRATION**

Subdivision: Canyon Creek Ranch  
Location: El Paso County

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By: \_\_\_\_\_  
Date: 10/8/24

SUB-BASIN						INITIAL/OVERLAND			TRAVEL TIME					t <sub>c</sub> CHECK			FINAL
DATA						(T <sub>i</sub> )			(T <sub>i</sub> )					(URBANIZED BASINS)			
BASIN ID	D.A. (ac)	Hydrologic Soils Group	Impervious (%)	C <sub>5</sub>	C <sub>100</sub>	L (ft)	S <sub>o</sub> (%)	t <sub>i</sub> (min)	L <sub>t</sub> (ft)	S <sub>t</sub> (%)	K	VEL. (ft/s)	t <sub>t</sub> (min)	COMP. t <sub>c</sub> (min)	TOTAL LENGTH (ft)	Urbanized t <sub>c</sub> (min)	t <sub>c</sub> (min)
EXA	4.39	B	6%	0.12	0.38	65	38.0%	4.3	570	4.0%	10.0	2.0	4.8	9.1	635.0	29.8	9.1
EXB	3.63	B	2%	0.09	0.36	110	14.0%	8.0	680	7.3%	10.0	2.7	4.2	12.2	790.0	30.2	12.2
EXC	9.38	B	5%	0.11	0.37	65	10.8%	6.6	840	9.1%	10.0	3.0	4.6	11.2	905.0	30.0	11.2
EXD	3.97	B	2%	0.09	0.36	100	14.8%	7.5	755	11.7%	10.0	3.4	3.7	11.2	855.0	29.6	11.2
EXE	3.08	B	2%	0.09	0.36	300	25.0%	10.9	55	4.0%	10.0	2.0	0.5	11.4	355.0	26.2	11.4
EXF	0.24	B	2%	0.09	0.36	180	4.5%	14.9	0	0.0%	10.0	0.0	0.0	14.9	180.0	25.7	14.9
OS1	1.7	B	2%	0.09	0.36	300	10.3%	14.6	180	13.4%	10.0	3.7	0.8	15.4	480.0	26.5	15.4
OS2	187.1	B	10%	0.16	0.41	-	-	-	-	-	-	-	-	-	-	-	-
OS3	0.24	B	2%	0.09	0.36	135	15.1%	8.7	0	0.0%	10.0	0.0	0.0	8.7	135.0	25.7	8.7
OS4	2.13	B	2%	0.09	0.36	50	2.0%	10.3	405	14.0%	10.0	3.7	1.8	12.1	455.0	27.6	12.1
OS5	163.7	B	10%	0.16	0.41	-	-	-	-	-	-	-	-	-	-	-	-
OS6	5.80	B	2%	0.09	0.36	300	16.5%	12.5	650	17.0%	10.0	4.1	2.6	15.1	950.0	28.5	15.1
OS7	1.04	B	2%	0.09	0.36	115	18.0%	7.5	0	0.0%	10.0	0.0	0.0	7.5	115.0	25.7	7.5
OS8	0.18	B	2%	0.09	0.36	125	24.0%	7.1	0	0.0%	10.0	0.0	0.0	7.1	125.0	25.7	7.1

NOTES:

$$t_c = t_i + t_t$$

Equation 6-2

$$t_i = \frac{0.395(1.1 - C_5)\sqrt{L_i}}{S_o^{0.333}}$$

Equation 6-3

Where:

t<sub>c</sub> = computed time of concentration (minutes)

t<sub>i</sub> = overland (initial) flow time (minutes)

t<sub>t</sub> = channelized flow time (minutes).

Where:

t<sub>i</sub> = overland (initial) flow time (minutes)

C<sub>5</sub> = runoff coefficient for 5-year frequency (from Table 6-4)

L<sub>i</sub> = length of overland flow (ft)

S<sub>o</sub> = average slope along the overland flow path (ft/ft).

Use a minimum t<sub>c</sub> value of 5 minutes for urbanized areas and a minimum t<sub>c</sub> value of 10 minutes for areas that are not considered urban. Use minimum values even when calculations result in a lesser time of concentration.

$$t_t = \frac{L_t}{60K\sqrt{S_t}} = \frac{L_t}{60V_t}$$

Equation 6-4

$$t_t = (26 - 17i) + \frac{L_t}{60(14i + 9)\sqrt{S_t}}$$

Equation 6-5

Where:

t<sub>t</sub> = channelized flow time (travel time, min)

L<sub>t</sub> = waterway length (ft)

S<sub>t</sub> = waterway slope (ft/ft)

V<sub>t</sub> = travel time velocity (ft/sec) = K√S<sub>t</sub>

K = NRCS conveyance factor (see Table 6-2).

Where:

t<sub>t</sub> = minimum time of concentration for first design point when less than t<sub>c</sub> from Equation 6-1.

L<sub>t</sub> = length of channelized flow path (ft)

i = imperviousness (expressed as a decimal)

S<sub>t</sub> = slope of the channelized flow path (ft/ft).

Table 6-2. NRCS Conveyance factors, K

Type of Land Surface	Conveyance Factor, K
Heavy meadow	2.5
Tillage/field	5
Short pasture and lawns	7
Nearly bare ground	10
Grassed waterway	15
Paved areas and shallow paved swales	20

**PRE-DEVELOPMENT STANDARD FORM SF-3**  
**STORM DRAINAGE SYSTEM DESIGN**  
(RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
Location: El Paso County  
Design Storm: 5-Year

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By: \_\_\_\_\_  
Date: 10/8/24

STREET	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE				TRAVEL TIME			REMARKS
		Basin ID	Area (Ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (Ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)	t <sub>t</sub> (min)	
	01	OS1	1.72	0.09	15.4	0.15	3.48	0.5															Sheet flows overland to basin boundary at DPO1 Combines flow within Kettle Creek at DP1.1
	02	OS2	187.10	0.16	50.0	29.94	-	41.0															Flows along ex. natural swales to the ex. 48" RCP culvert at DPO2 Combines flow within Kettle Creek at DP1.1
	03	OS3	0.24	0.09	8.7	0.02	4.35	0.1															Sheet flows overland to basin boundary at DPO3 Combines flow within Kettle Creek at DP1.1
	1	EXA	4.39	0.12	9.1	0.51	4.28	2.2															Flows to ex. natural swale to DP1 Combines flow within Kettle Creek at DP1.1
	1.1								50.0	30.62	1.71	52.5											Combines flow of DPO1, DPO2, DPO3 and DP1 within Kettle Creek Continues flowing west along Kettle Creek to DP2.2
	04	OS4	2.13	0.09	12.1	0.19	3.85	0.7															Flows to ex. natural swale to basin boundary at DPO4 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2	EXB	3.63	0.09	12.2	0.33	3.83	1.3															Flows to ex. natural swale to DP2 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2.1								12.2	0.52	3.83	2.0											Combines flow of DPO4 and DP2 at the ex. triple 24" RCP culvert Continues flowing north and west along Kettle Creek to DP2.2
	2.2								50.0	31.14	1.71	53.4											Combines flow of DP1.1 and DP2.1 within Kettle Creek Continues flowing west along Kettle Creek to DP3.1
	05	OS5	163.70	0.16	45.0	26.19	-	42.0															Flows to ex. natural swales to basin boundary at DPO5 Combines flow within Kettle Creek at DP3.1
	3	EXC	9.38	0.11	11.2	1.00	3.95	4.0															Flows overland to ex. natural swale to DP3 Combines flow within Kettle Creek at DP3.1
	3.1								50.0	58.33	1.71	100.0											Combines flow of DP2.2, DPO5 and DP3 within Kettle Creek Continues flowing northwest along Kettle Creek to DP4.1
	06	OS6	5.80	0.09	15.1	0.53	3.51	1.9															Flows to ex. natural swale to basin boundary at DPO6 Combines flow within Kettle Creek at DP4.1
	4	EXD	3.97	0.09	11.2	0.36	3.96	1.4															Flows to ex. natural swale to DP4 Combines flow within Kettle Creek at DP4.1
	4.1								50.0	59.22	1.71	101.6											Combines flow of DP3.1, DPO6 and DP4 within Kettle Creek Continues flowing north along Kettle Creek off-site

**PRE-DEVELOPMENT STANDARD FORM SF-3**  
**STORM DRAINAGE SYSTEM DESIGN**  
 (RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
 Location: El Paso County  
 Design Storm: 5-Year

Project Name: Canyon Creek Ranch  
 Project No.: 25322.00  
 Calculated By: GAG  
 Checked By: \_\_\_\_\_  
 Date: 10/8/24

STREET	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE				TRAVEL TIME			REMARKS
		Basin ID	Area (Ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (Ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)	t <sub>t</sub> (min)	
	07	OS7	1.04	0.09	7.5	0.09	4.55	0.4															Flows to ex. natural swale to basin boundary at DPO7 Combines flow within Kettle Creek at DP5.1
	08	OS8	0.18	0.09	7.1	0.02	4.63	0.1															Sheet flows overland to basin boundary at DPO8 Combines flow within Kettle Creek at DP5.1
	5	EXE	3.08	0.09	11.4	0.28	3.94	1.1															Flows to ex. natural swale to DP5 Combines flow within Kettle Creek at DP5.1
	5.1								50.0	59.61	1.71	102.2											Combines flow DP4.1, DPO7, DPO8 and DP5 within Kettle Creek Continues flowing north and then west along Kettle Creek off-site
	6	EXF	0.24	0.09	14.9	0.02	3.53	0.1															Sheet flows overland to basin boundary at DP6 Continues flowing west eventually flowing to Kettle Creek off-site

Notes:  
 Street and Pipe C\*A values are determined by Q/i using the catchment's intensity value.  
 Values in **RED** determined from the CUHP method for basins over 100 acres. See separate CUHP calculations.

**PRE-DEVELOPMENT STANDARD FORM SF-3**  
**STORM DRAINAGE SYSTEM DESIGN**  
**(RATIONAL METHOD PROCEDURE)**

Subdivision: Canyon Creek Ranch  
 Location: El Paso County  
 Design Storm: 100-Year

Project Name: Canyon Creek Ranch  
 Project No.: 25322.00  
 Calculated By: GAG  
 Checked By:  
 Date: 10/8/24

Description	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE				TRAVEL TIME			REMARKS
		Basin ID	Area (ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)	t <sub>t</sub> (min)	
	O1	OS1	1.72	0.36	15.4	0.62	5.84	3.6					3.6	0.62	5.0					555	4.5	2.1	Sheet flows overland to basin boundary at DPO1 Combines flow within Kettle Creek at DP1.1
	O2	OS2	187.10	0.41	59.0	76.71	-	176.0															Flows along ex. natural swales to the ex. 48" RCP culvert at DPO2 Combines flow within Kettle Creek at DP1.1
	O3	OS3	0.24	0.36	8.7	0.09	7.30	0.7					0.7	0.09	14.0					485	7.5	1.1	Sheet flows overland to basin boundary at DPO3 Combines flow within Kettle Creek at DP1.1
	1	EXA	4.39	0.38	9.1	1.66	7.18	11.9															Flows to ex. natural swale to DP1 Combines flow within Kettle Creek at DP1.1
	1.1							59.0	79.08	2.46	194.5												Combines flow of DPO1, DPO2, DPO3 and DP1 within Kettle Creek Continues flowing west along Kettle Creek to DP2.2
	O4	OS4	2.13	0.36	12.1	0.77	6.46	5.0					5.0	0.77	7.6					790	5.5	2.4	Flows to ex. natural swale to basin boundary at DPO4 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2	EXB	3.63	0.36	12.2	1.31	6.43	8.4															Flows to ex. natural swale to DP2 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2.1							14.5	2.08	6.00	12.5												Combines flow of DPO4 and DP2 at the ex. triple 24" RCP culvert Continues flowing north and west along Kettle Creek to DP2.2
	2.2							59.0	81.16	2.46	199.6		199.6	81.16	1.1					430	2.1	3.4	Combines flow of DP1.1 and DP2.1 within Kettle Creek Continues flowing west along Kettle Creek to DP3.1
	O5	OS5	163.70	0.41	53.0	67.12	-	178.0															Flows to ex. natural swales to basin boundary at DPO5 Combines flow within Kettle Creek at DP3.1
	3	EXC	9.38	0.37	11.2	3.49	6.64	23.2															Flows overland to ex. natural swale to DP3 Combines flow within Kettle Creek at DP3.1
	3.1							62.4	151.77	2.32	351.8		351.8	151.77	1.1					325	2.1	2.6	Combines flow of DP2.2, DPO5 and DP3 within Kettle Creek Continues flowing northwest along Kettle Creek to DP4.1
	O6	OS6	5.80	0.36	15.1	2.09	5.89	12.3					12.3	2.09	14.8					350	7.7	0.8	Flows to ex. natural swale to basin boundary at DPO6 Combines flow within Kettle Creek at DP4.1
	4	EXD	3.97	0.36	11.2	1.43	6.65	9.5															Flows to ex. natural swale to DP4 Combines flow within Kettle Creek at DP4.1
	4.1							62.4	155.29	2.32	359.9		359.9	155.29	1.6					755	2.5	5.0	Combines flow of DP3.1, DPO6 and DP4 within Kettle Creek Continues flowing north along Kettle Creek off-site

PRE-DEVELOPMENT STANDARD FORM SF-3  
STORM DRAINAGE SYSTEM DESIGN  
(RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
Location: El Paso County  
Design Storm: 100-Year

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By:  
Date: 10/8/24

Description	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE				TRAVEL TIME			REMARKS
		Basin ID	Area (ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)	t <sub>t</sub> (min)	
	O7	OS7	1.04	0.36	7.5	0.37	7.65	2.8					2.8	0.37	23.4					315	9.7	0.5	Flows to ex. natural swale to basin boundary at DPO7 Combines flow within Kettle Creek at DP5.1
	O8	OS8	0.18	0.36	7.1	0.06	7.78	0.5					0.5	0.06	21.0					190	9.2	0.3	Sheet flows overland to basin boundary at DPO8 Combines flow within Kettle Creek at DP5.1
	5	EXE	3.08	0.36	11.4	1.11	6.61	7.3														Flows to ex. natural swale to DP5 Combines flow within Kettle Creek at DP5.1	
	5.1								62.4	156.83	2.32	363.5										Combines flow DP4.1, DPO7, DPO8 and DP5 within Kettle Creek Continues flowing north and then west along Kettle Creek off-site	
	6	EXF	0.24	0.36	14.9	0.09	5.93	0.5														Sheet flows overland to basin boundary at DP6 Continues flowing west eventually flowing to Kettle Creek off-site	

Notes:  
Street and Pipe C\*A values are determined by Q/i using the catchment's intensity value.  
Values in RED determined from the CUHP method for basins over 100 acres. See separate CUHP calculations.

PROPOSED COMPOSITE % IMPERVIOUS & COMPOSITE RUNOFF COEFFICIENT CALCULATIONS

Subdivision: Canyon Creek Ranch  
 Location: El Paso County

Project Name: Canyon Creek Ranch  
 Project No.: 25322.00  
 Calculated By: GAG  
 Checked By: \_\_\_\_\_  
 Date: 10/8/24

Basin ID	Total Area (ac)	Rural 5-Acre Lots (10% Impervious)				Roofs (90% Impervious)				Streets-Gravel (80% Impervious)				Historical Analysis/Lawn (2% Impervious)				Basins Total Weighted C Values		Basins Total Weighted % Imp.
		C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	Area (ac)	Weighted % Imp.	C <sub>5</sub>	C <sub>100</sub>	
A	4.39	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.35	6.4%	0.09	0.36	4.04	1.8%	0.13	0.39	8.2%
B	3.63	0.16	0.41	0.00	0.0%	0.73	0.81		0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	3.63	2.0%	0.09	0.36	2.0%
C	9.38	0.16	0.41	0.00	0.0%	0.73	0.81		0.0%	0.59	0.70	0.34	2.9%	0.09	0.36	9.04	1.9%	0.11	0.37	4.8%
D	3.97	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	3.97	2.0%	0.09	0.36	2.0%
E	3.08	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	3.08	2.0%	0.09	0.36	2.0%
F	0.24	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.24	2.0%	0.09	0.36	2.0%
OS1	1.72	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	1.72	2.0%	0.09	0.36	2.0%
OS2	187.1	0.16	0.41	187.10	10.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.00	0.0%	0.16	0.41	10.0%
OS3	0.24	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.24	2.0%	0.09	0.36	2.0%
OS4	2.13	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	2.13	2.0%	0.09	0.36	2.0%
OS5	163.7	0.16	0.41	163.7	10.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.00	0.0%	0.16	0.41	10.0%
OS6	5.80	0.16	0.41	0.00	0.0%	0.73	0.81	0.01	0.2%	0.59	0.70	0.00	0.0%	0.09	0.36	5.79	2.0%	0.09	0.36	2.2%
OS7	1.04	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	1.04	2.0%	0.09	0.36	2.0%
OS8	0.18	0.16	0.41	0.00	0.0%	0.73	0.81	0.00	0.0%	0.59	0.70	0.00	0.0%	0.09	0.36	0.18	2.0%	0.09	0.36	2.0%
TOTAL ON-SITE	24.69																			4.2%
TOTAL OFF-SITE	361.9																			9.8%

PROPOSED  
STANDARD FORM SF-2  
TIME OF CONCENTRATION

Subdivision: Canyon Creek Ranch  
Location: El Paso County

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By: \_\_\_\_\_  
Date: 10/8/24

SUB-BASIN						INITIAL/OVERLAND			TRAVEL TIME					t <sub>c</sub> CHECK			FINAL
DATA						(T <sub>i</sub> )			(T <sub>t</sub> )					(URBANIZED BASINS)			
BASIN ID	D.A. (ac)	Hydrologic Soils Group	Impervious (%)	C <sub>5</sub>	C <sub>100</sub>	L (ft)	S <sub>o</sub> (%)	t <sub>i</sub> (min)	L <sub>t</sub> (ft)	S <sub>t</sub> (%)	K	VEL. (ft/s)	t <sub>t</sub> (min)	COMP. t <sub>c</sub> (min)	TOTAL LENGTH (ft)	Urbanized t <sub>c</sub> (min)	
A	4.39	B	8%	0.13	0.39	65	38.0%	4.3	570	4.0%	10.0	2.0	4.8	9.0	635.0	29.3	9.0
B	3.63	B	2%	0.09	0.36	110	14.0%	8.0	680	7.3%	10.0	2.7	4.2	12.2	790.0	30.2	12.2
C	9.38	B	5%	0.11	0.37	65	10.8%	6.6	840	9.1%	10.0	3.0	4.6	11.2	905.0	30.0	11.2
D	3.97	B	2%	0.09	0.36	100	14.8%	7.5	755	11.7%	10.0	3.4	3.7	11.2	855.0	29.6	11.2
E	3.08	B	2%	0.09	0.36	300	25.0%	10.9	55	4.0%	10.0	2.0	0.5	11.4	355.0	26.2	11.4
F	0.24	B	2%	0.09	0.36	180	4.5%	14.9	0	0.0%	10.0	0.0	0.0	14.9	180.0	25.7	14.9
OS1	1.72	B	2%	0.09	0.36	300	10.3%	14.6	180	13.4%	10.0	3.7	0.8	15.4	480.0	26.5	15.4
OS2	187.10	B	10%	0.16	0.41	-	-	-	-	-	-	-	-	-	-	-	-
OS3	0.24	B	2%	0.09	0.36	135	15.1%	8.7	0	0.0%	10.0	0.0	0.0	8.7	135.0	25.7	8.7
OS4	2.13	B	2%	0.09	0.36	50	2.0%	10.3	405	14.0%	10.0	3.7	1.8	12.1	455.0	27.6	12.1
OS5	163.70	B	10%	0.16	0.41	-	-	-	-	-	-	-	-	-	-	-	-
OS6	5.80	B	2%	0.09	0.36	300	16.5%	12.5	650	17.0%	10.0	4.1	2.6	15.1	950.0	28.5	15.1
OS7	1.04	B	2%	0.09	0.36	115	18.0%	7.5	0	0.0%	10.0	0.0	0.0	7.5	115.0	25.7	7.5
OS8	0.18	B	2%	0.09	0.36	125	24.0%	7.1	0	0.0%	10.0	0.0	0.0	7.1	125.0	25.7	7.1

# PROPOSED STANDARD FORM SF-2 TIME OF CONCENTRATION

Subdivision: Canyon Creek Ranch  
Location: El Paso County

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By: \_\_\_\_\_  
Date: 10/8/24

SUB-BASIN						INITIAL/OVERLAND			TRAVEL TIME					t <sub>c</sub> CHECK			FINAL
DATA						(T <sub>i</sub> )			(T <sub>t</sub> )					(URBANIZED BASINS)			
BASIN	D.A.	Hydrologic	Impervious	C <sub>5</sub>	C <sub>100</sub>	L	S <sub>o</sub>	t <sub>i</sub>	L <sub>t</sub>	S <sub>t</sub>	K	VEL.	t <sub>t</sub>	COMP. t <sub>c</sub>	TOTAL	Urbanized t <sub>c</sub>	t <sub>c</sub>

NOTES:

$$t_c = t_i + t_t$$

Equation 6-2

$$t_i = \frac{0.395(1.1 - C_5)\sqrt{L_i}}{S_o^{0.33}}$$

Equation 6-3

Where:

t<sub>c</sub> = computed time of concentration (minutes)

t<sub>i</sub> = overland (initial) flow time (minutes)

t<sub>t</sub> = channelized flow time (minutes).

Where:

t<sub>i</sub> = overland (initial) flow time (minutes)

C<sub>5</sub> = runoff coefficient for 5-year frequency (from Table 6-4)

L<sub>i</sub> = length of overland flow (ft)

S<sub>o</sub> = average slope along the overland flow path (ft/ft).

Use a minimum t<sub>c</sub> value of 5 minutes for urbanized areas and a minimum t<sub>c</sub> value of 10 minutes for areas that are not considered urban. Use minimum values even when calculations result in a lesser time of concentration.

$$t_t = \frac{L_t}{60K\sqrt{S_o}} = \frac{L_t}{60V_t}$$

Equation 6-4

$$t_c = (26 - 17i) + \frac{L_t}{60(14i + 9)\sqrt{S_t}}$$

Equation 6-5

Where:

t<sub>t</sub> = channelized flow time (travel time, min)

L<sub>t</sub> = waterway length (ft)

S<sub>o</sub> = waterway slope (ft/ft)

V<sub>t</sub> = travel time velocity (ft/sec) = K√S<sub>o</sub>

K = NRCS conveyance factor (see Table 6-2).

Where:

t<sub>c</sub> = minimum time of concentration for first design point when less than t<sub>c</sub> from Equation 6-1

L<sub>t</sub> = length of channelized flow path (ft)

i = imperviousness (expressed as a decimal)

S<sub>t</sub> = slope of the channelized flow path (ft/ft).

Table 6-2. NRCS Conveyance factors, K

Type of Land Surface	Conveyance Factor, K
Heavy meadow	2.5
Tillage/field	5
Short pasture and lawns	7
Nearly bare ground	10
Grassed waterway	15
Paved areas and shallow paved swales	20



PROPOSED STANDARD FORM SF-3  
STORM DRAINAGE SYSTEM DESIGN  
(RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
Location: El Paso County  
Design Storm: 5-Year

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By:  
Date: 10/8/24

STREET	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE			TRAVEL TIME			REMARKS	
		Basin ID	Area (Ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (Ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)		t <sub>t</sub> (min)
	O1	OS1	1.72	0.09	15.4	0.15	3.48	0.5															Sheet flows overland to basin boundary at DPO1 Combines flow within Kettle Creek at DP1.1
	O2	OS2	187.10	0.16	50.0	29.94	-	41.0															Flows along ex. natural swales to the ex. 48" RCP culvert at DPO2 Combines flow within Kettle Creek at DP1.1
	O3	OS3	0.24	0.09	8.7	0.02	4.35	0.1															Sheet flows overland to basin boundary at DPO3 Combines flow within Kettle Creek at DP1.1
	1	A	4.39	0.13	9.0	0.57	4.29	2.4															Flows to ex. natural swale to DP1 Combines flow within Kettle Creek at DP1.1
	1.1								50.0	30.68	1.71	52.6											Combines flow of DPO1, DPO2, DPO3 and DP1 within Kettle Creek Continues flowing west along Kettle Creek to DP2.2
	O4	OS4	2.13	0.09	12.1	0.19	3.85	0.7															Flows to ex. natural swale to basin boundary at DPO4 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2	B	3.63	0.09	12.2	0.33	3.83	1.3															Flows to ex. natural swale to DP2 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2.1								12.2	0.52	3.83	2.0											Combines flow of DPO4 and DP2 at the ex. triple 24" RCP culvert Continues flowing north and west along Kettle Creek to DP2.2
	2.2								50.0	31.20	1.71	53.5											Combines flow of DP1.1 and DP2.1 within Kettle Creek Continues flowing west along Kettle Creek to DP3.1
	O5	OS5	163.70	0.16	45.0	26.19	-	42.0															Flows to ex. natural swales to basin boundary at DPO5 Combines flow within Kettle Creek at DP3.1
	3	C	9.38	0.11	11.2	1.01	3.96	4.0															Flows overland to ex. natural swale to DP3 Combines flow within Kettle Creek at DP3.1
	3.1								50.0	58.40	1.71	100.2											Combines flow of DP2.2, DPO5 and DP3 within Kettle Creek Continues flowing northwest along Kettle Creek to DP4.1
	O6	OS6	5.80	0.09	15.1	0.53	3.51	1.9															Flows to ex. natural swale to basin boundary at DPO6 Combines flow within Kettle Creek at DP4.1
	4	D	3.97	0.09	11.2	0.36	3.96	1.4															Flows to ex. natural swale to DP4 Combines flow within Kettle Creek at DP4.1
	4.1								50.0	59.29	1.71	101.7											Combines flow of DP3.1, DPO6 and DP4 within Kettle Creek Continues flowing north along Kettle Creek off-site

**PROPOSED STANDARD FORM SF-3**  
**STORM DRAINAGE SYSTEM DESIGN**  
 (RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
 Location: El Paso County  
 Design Storm: 5-Year

Project Name: Canyon Creek Ranch  
 Project No.: 25322.00  
 Calculated By: GAG  
 Checked By:  
 Date: 10/8/24

STREET	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE				TRAVEL TIME			REMARKS
		Basin ID	Area (Ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (Ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)	t <sub>t</sub> (min)	
	O7	OS7	1.04	0.09	7.5	0.09	4.55	0.4															Flows to ex. natural swale to basin boundary at DPO7 Combines flow within Kettle Creek at DP5.1
	O8	OS8	0.18	0.09	7.1	0.02	4.63	0.1															Sheet flows overland to basin boundary at DPO8 Combines flow within Kettle Creek at DP5.1
	5	E	3.08	0.09	11.4	0.28	3.94	1.1															Flows to ex. natural swale to DP5 Combines flow within Kettle Creek at DP5.1
	5.1								50.0	59.68	1.71	102.3											Combines flow DP4.1, DPO7, DPO8 and DP5 within Kettle Creek Continues flowing north and then west along Kettle Creek off-site
	6	F	0.24	0.09	14.9	0.02	3.53	0.1															Sheet flows overland to basin boundary at DP6 Continues flowing west eventually flowing to Kettle Creek off-site

Notes:  
 Street and Pipe C\*A values are determined by Q/i using the catchment's intensity value.  
 Values in RED determined from the CUHP method for basins over 100 acres. See separate CUHP calculations.

PROPOSED STANDARD FORM SF-3  
STORM DRAINAGE SYSTEM DESIGN  
(RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
Location: El Paso County  
Design Storm: 100-Year

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By:  
Date: 10/8/24

Description	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE			TRAVEL TIME			REMARKS	
		Basin ID	Area (ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	Q <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)		t <sub>i</sub> (min)
	O1	OS1	1.72	0.36	15.4	0.62	5.84	3.6					3.6	0.62	5.0					555	4.5	2.1	Sheet flows overland to basin boundary at DPO1 Combines flow within Kettle Creek at DP1.1
	O2	OS2	187.10	0.41	59.0	76.71	-	176.0															Flows along ex. natural swales to the ex. 48" RCP culvert at DPO2 Combines flow within Kettle Creek at DP1.1
	O3	OS3	0.24	0.36	8.7	0.09	7.30	0.7					0.7	0.09	14.0					485	7.5	1.1	Sheet flows overland to basin boundary at DPO3 Combines flow within Kettle Creek at DP1.1
	1	A	4.39	0.39	9.0	1.70	7.20	12.2															Flows to ex. natural swale to DP1 Combines flow within Kettle Creek at DP1.1
	1.1								59.0	79.12	2.46	194.6											Combines flow of DPO1, DPO2, DPO3 and DP1 within Kettle Creek Continues flowing west along Kettle Creek to DP2.2
	O4	OS4	2.13	0.36	12.1	0.77	6.46	5.0					5.0	0.77	7.6					790	5.5	2.4	Flows to ex. natural swale to basin boundary at DPO4 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2	B	3.63	0.36	12.2	1.31	6.43	8.4															Flows to ex. natural swale to DP2 Combines flow at ex. triple 24" RCP culvert at DP2.1
	2.1								14.5	2.08	6.00	12.5											Combines flow of DPO4 and DP2 at the ex. triple 24" RCP culvert Continues flowing north and west along Kettle Creek to DP2.2
	2.2								59.0	81.20	2.46	199.7	0.0	0.00	1.1					430	2.1	3.4	Combines flow of DP1.1 and DP2.1 within Kettle Creek Continues flowing west along Kettle Creek to DP3.1
	O5	OS5	163.70	0.41	53.0	67.12	-	178.0															Flows to ex. natural swales to basin boundary at DPO5 Combines flow within Kettle Creek at DP3.1
	3	C	9.38	0.37	11.2	3.49	6.64	23.2															Flows overland to ex. natural swale to DP3 Combines flow within Kettle Creek at DP3.1
	3.1								62.4	151.81	2.32	351.9	0.0	0.00	1.1					325	2.1	2.6	Combines flow of DP2.2, DPO5 and DP3 within Kettle Creek Continues flowing northwest along Kettle Creek to DP4.1
	O6	OS6	5.80	0.36	15.1	2.09	5.89	12.3					12.3	2.09	14.8					350	7.7	0.8	Flows to ex. natural swale to basin boundary at DPO6 Combines flow within Kettle Creek at DP4.1
	4	D	3.97	0.36	11.2	1.43	6.65	9.5															Flows to ex. natural swale to DP4 Combines flow within Kettle Creek at DP4.1
	4.1								62.4	155.33	2.32	360.0	0.0	0.00	1.6					755	2.5	5.0	Combines flow of DP3.1, DPO6 and DP4 within Kettle Creek Continues flowing north along Kettle Creek off-site

PROPOSED STANDARD FORM SF-3  
STORM DRAINAGE SYSTEM DESIGN  
(RATIONAL METHOD PROCEDURE)

Subdivision: Canyon Creek Ranch  
Location: El Paso County  
Design Storm: 100-Year

Project Name: Canyon Creek Ranch  
Project No.: 25322.00  
Calculated By: GAG  
Checked By:  
Date: 10/8/24

Description	Design Point	DIRECT RUNOFF							TOTAL RUNOFF				STREET/SWALE			PIPE			TRAVEL TIME			REMARKS	
		Basin ID	Area (ac)	Runoff Coeff.	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	t <sub>c</sub> (min)	C*A (ac)	I (in/hr)	Q (cfs)	C <sub>street/swale</sub> (cfs)	C*A (ac)	Slope (%)	Q <sub>pipe</sub> (cfs)	C*A (ac)	Slope (%)	Pipe Size (inches)	Length (ft)	Velocity (fps)		t <sub>t</sub> (min)
	07	OS7	1.04	0.36	7.5	0.37	7.65	2.8					2.8	0.37	23.4					315	9.7	0.5	Flows to ex. natural swale to basin boundary at DPO7 Combines flow within Kettle Creek at DP5.1
	08	OS8	0.18	0.36	7.1	0.06	7.78	0.5					0.5	0.06	21.0					190	9.2	0.3	Sheet flows overland to basin boundary at DPO8 Combines flow within Kettle Creek at DP5.1
	5	E	3.08	0.36	11.4	1.11	6.61	7.3														Flows to ex. natural swale to DP5 Combines flow within Kettle Creek at DP5.1	
	5.1								62.4	156.87	2.32	363.6										Combines flow DP4.1, DPO7, DPO8 and DP5 within Kettle Creek Continues flowing north and then west along Kettle Creek off-site	
	6	F	0.24	0.36	14.9	0.09	5.93	0.5														Sheet flows overland to basin boundary at DP6 Continues flowing west eventually flowing to Kettle Creek off-site	

Notes:  
Street and Pipe C\*A values are determined by Q/i using the catchment's intensity value.  
Values in RED determined from the CUHP method for basins over 100 acres. See separate CUHP calculations.

**Summary of CUHP Input Parameters (Version 2.0.1)**

Catchment Name/ID	SWMM Node/ID	Raingage Name/ID	Area (sq.mi.)	Dist. to Centroid (miles)	Length (miles)	Slope (ft./ft.)	Percent Imperv.	Depression Storage		Horton's Infiltration Parameters			DCIA Level and Fractions			
								Pervious (inches)	Imperv. (inches)	Initial Rate (in./hr.)	Final Rate (in.hr.)	Decay Coeff. (1/sec.)	DCIA Level	Dir. Con'ct Imperv. Fraction	Receiv. Perv. Fraction	Percent Eff. Imperv.
OS2		5 YR DESIGN STORM	0.292	0.658	1.606	0.059	10.0	0.40	0.10	4.50	0.60	0.0018	0.00	0.20	0.10	8.19
OS3		5 YR DESIGN STORM	0.256	0.512	1.125	0.047	10.0	0.40	0.10	4.50	0.60	0.0018	0.00	0.20	0.10	8.19

**(5-year) Summary of Unit Hydrograph Parameters Used By Program and Calculated Results (Version 2.0.1)**

Catchment Name/ID	User Comment for Catchment	Unit Hydrograph Parameters and Results									Excess Precip.		Storm Hydrograph			
		CT	Cp	W50 (min.)	W50 Before Peak	W75 (min.)	W75 Before Peak	Time to Peak (min.)	Peak (cfs)	Volume (c.f)	Excess (inches)	Excess (c.f.)	Time to Peak (min.)	Peak Flow (cfs)	Total Volume (c.f.)	Runoff per Unit Area (cfs/acre)
OS2		0.133	0.215	58.7	9.97	30.5	7.05	16.6	149	679,173	0.31	213,763	50.0	41	213,761	0.22
OS3		0.133	0.206	48.2	7.93	25.1	5.61	13.2	159	594,231	0.31	187,028	45.0	42	187,029	0.26

**(100-year) Summary of Unit Hydrograph Parameters Used By Program and Calculated Results (Version 2.0.1)**

Catchment Name/ID	User Comment for Catchment	Unit Hydrograph Parameters and Results									Excess Precip.		Storm Hydrograph			
		CT	Cp	W50 (min.)	W50 Before Peak	W75 (min.)	W75 Before Peak	Time to Peak (min.)	Peak (cfs)	Volume (c.f)	Excess (inches)	Excess (c.f.)	Time to Peak (min.)	Peak Flow (cfs)	Total Volume (c.f.)	Runoff per Unit Area (cfs/acre)
OS2		0.130	0.211	58.5	9.79	30.4	6.92	16.3	150	679,173	1.42	967,207	59.0	176	967,198	0.94
OS5		0.130	0.203	48.1	7.79	25.0	5.51	13.0	160	594,231	1.42	846,241	53.0	178	846,245	1.09

## **Appendix C**

### **Hydraulic Calculations**



# Culvert Report


## Existing 48-Inch CMP (5 year)

Invert Elev Dn (ft)	= 6939.06
Pipe Length (ft)	= 50.23
Slope (%)	= 5.49
Invert Elev Up (ft)	= 6941.82
Rise (in)	= 48.0
Shape	= Circular
Span (in)	= 48.0
No. Barrels	= 1
n-Value	= 0.024
Culvert Type	= Circular Concrete
Culvert Entrance	= Groove end projecting (C)
Coeff. K,M,c,Y,k	= 0.0045, 2, 0.0317, 0.69, 0.2

<b>Embankment</b>	
Top Elevation (ft)	= 6952.00
Top Width (ft)	= 11.00
Crest Width (ft)	= 100.00

<b>Calculations</b>	
Qmin (cfs)	= 41.00
Qmax (cfs)	= 41.00
Tailwater Elev (ft)	= Normal

<b>Highlighted</b>	
Qtotal (cfs)	= 41.00
Qpipe (cfs)	= 41.00
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 11.54
Veloc Up (ft/s)	= 6.92
HGL Dn (ft)	= 6940.36
HGL Up (ft)	= 6943.73
Hw Elev (ft)	= 6944.41
Hw/D (ft)	= 0.65
Flow Regime	= Inlet Control

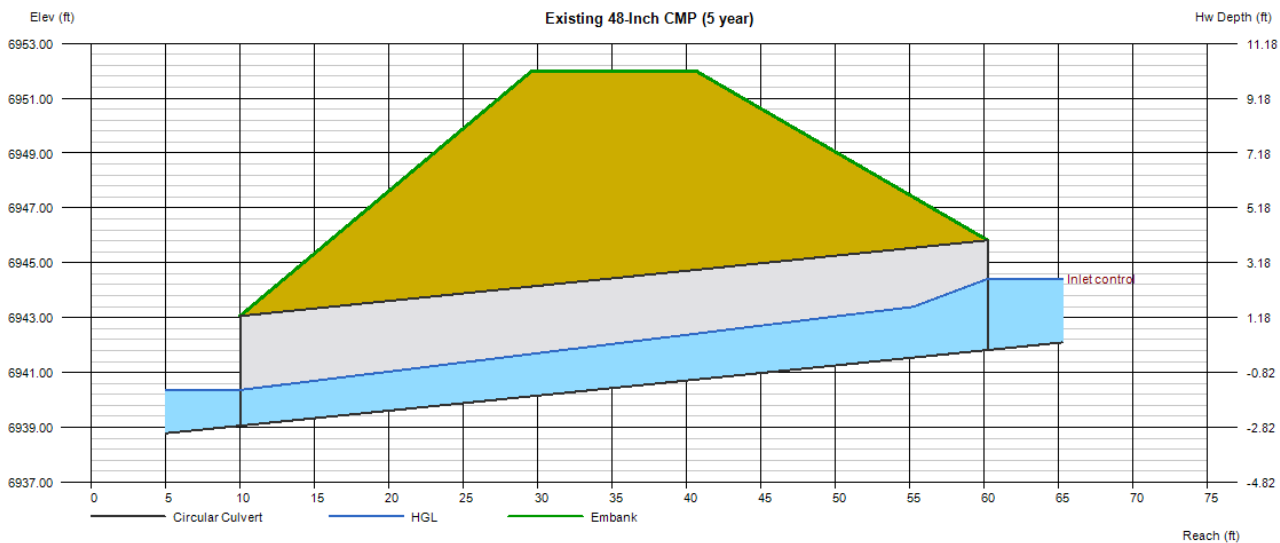

# Culvert Report


## Existing 48-Inch CMP (100 year)

Invert Elev Dn (ft)	= 6939.06
Pipe Length (ft)	= 50.23
Slope (%)	= 5.49
Invert Elev Up (ft)	= 6941.82
Rise (in)	= 48.0
Shape	= Circular
Span (in)	= 48.0
No. Barrels	= 1
n-Value	= 0.024
Culvert Type	= Circular Concrete
Culvert Entrance	= Groove end projecting (C)
Coeff. K,M,c,Y,k	= 0.0045, 2, 0.0317, 0.69, 0.2

<b>Embankment</b>	
Top Elevation (ft)	= 6952.00
Top Width (ft)	= 11.00
Crest Width (ft)	= 100.00

<b>Calculations</b>	
Qmin (cfs)	= 176.00
Qmax (cfs)	= 176.00
Tailwater Elev (ft)	= Normal

<b>Highlighted</b>	
Qtotal (cfs)	= 176.00
Qpipe (cfs)	= 176.00
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 14.37
Veloc Up (ft/s)	= 14.37
HGL Dn (ft)	= 6942.82
HGL Up (ft)	= 6945.58
Hw Elev (ft)	= 6950.69
Hw/D (ft)	= 2.22
Flow Regime	= Inlet Control

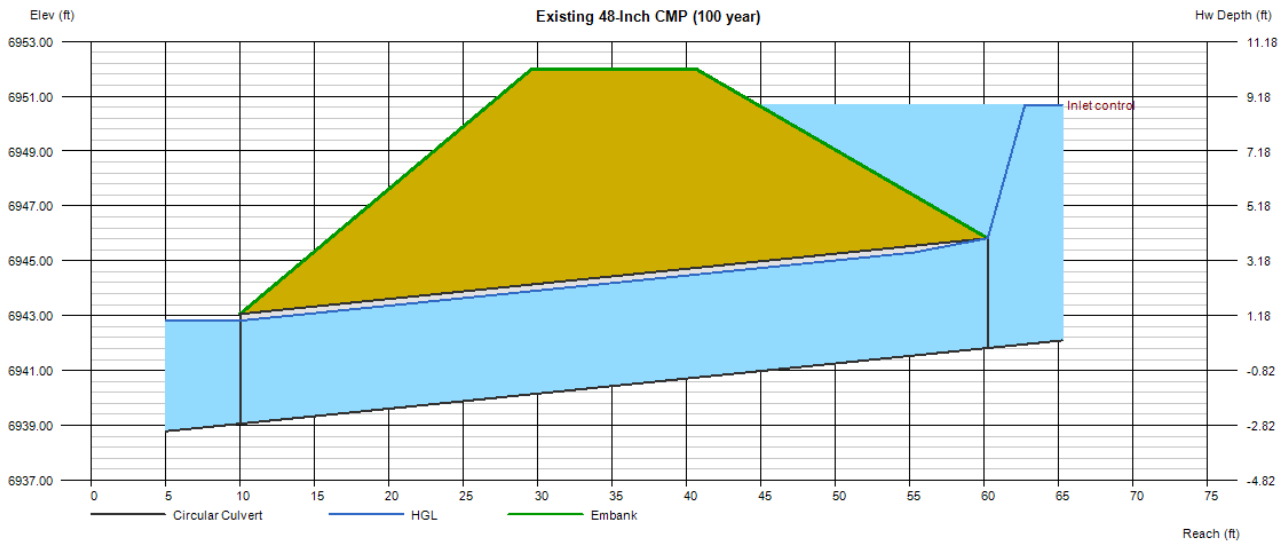

# Culvert Report


## Existing Triple 24-Inch CMP (5-year)

Invert Elev Dn (ft)	= 6926.27
Pipe Length (ft)	= 30.57
Slope (%)	= 6.28
Invert Elev Up (ft)	= 6928.19
Rise (in)	= 24.0
Shape	= Circular
Span (in)	= 24.0
No. Barrels	= 3
n-Value	= 0.024
Culvert Type	= Circular Concrete
Culvert Entrance	= Groove end projecting (C)
Coeff. K,M,c,Y,k	= 0.0045, 2, 0.0317, 0.69, 0.2

<b>Embankment</b>	
Top Elevation (ft)	= 6934.35
Top Width (ft)	= 11.50
Crest Width (ft)	= 100.00

<b>Calculations</b>	
Qmin (cfs)	= 2.00
Qmax (cfs)	= 2.00
Tailwater Elev (ft)	= Normal

<b>Highlighted</b>	
Qtotal (cfs)	= 2.00
Qpipe (cfs)	= 2.00
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 3.96
Veloc Up (ft/s)	= 2.49
HGL Dn (ft)	= 6926.47
HGL Up (ft)	= 6928.47
Hw Elev (ft)	= 6928.50
Hw/D (ft)	= 0.16
Flow Regime	= Inlet Control

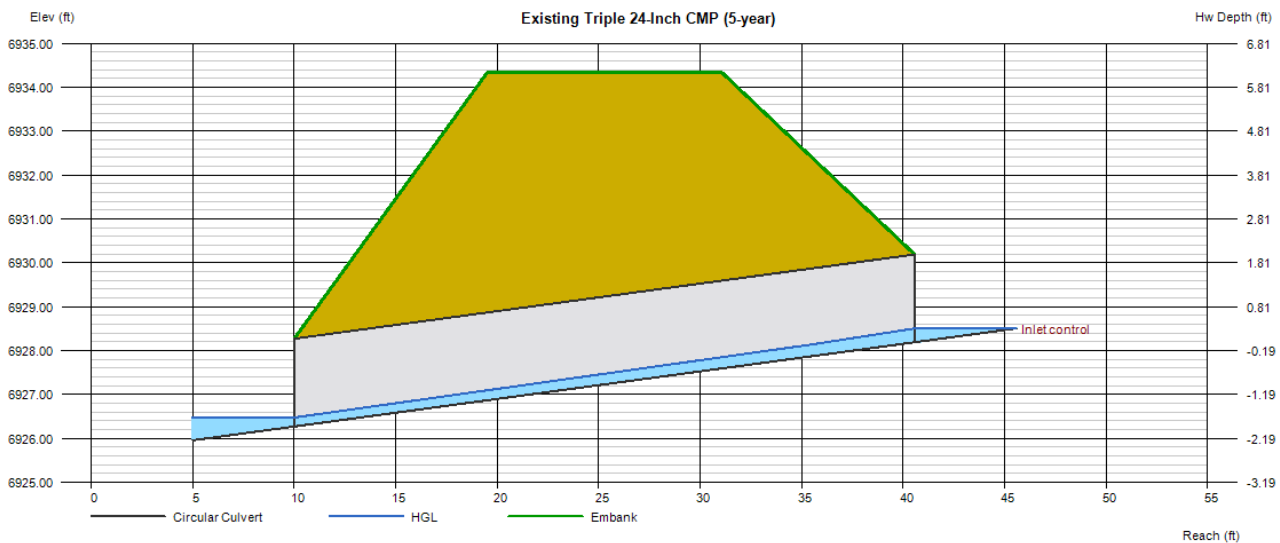

# Culvert Report

## Existing Triple 24-Inch CMP (100-year)

Invert Elev Dn (ft)	= 6926.27
Pipe Length (ft)	= 30.57
Slope (%)	= 6.28
Invert Elev Up (ft)	= 6928.19
Rise (in)	= 24.0
Shape	= Circular
Span (in)	= 24.0
No. Barrels	= 3
n-Value	= 0.024
Culvert Type	= Circular Concrete
Culvert Entrance	= Groove end projecting (C)
Coeff. K,M,c,Y,k	= 0.0045, 2, 0.0317, 0.69, 0.2

<b>Embankment</b>	
Top Elevation (ft)	= 6934.35
Top Width (ft)	= 11.50
Crest Width (ft)	= 100.00


<b>Calculations</b>	
Qmin (cfs)	= 12.50
Qmax (cfs)	= 12.50
Tailwater Elev (ft)	= Normal

<b>Highlighted</b>	
Qtotal (cfs)	= 12.50
Qpipe (cfs)	= 12.50
Qovertop (cfs)	= 0.00
Veloc Dn (ft/s)	= 6.74
Veloc Up (ft/s)	= 4.13
HGL Dn (ft)	= 6926.77
HGL Up (ft)	= 6928.91
Hw Elev (ft)	= 6929.12
Hw/D (ft)	= 0.46
Flow Regime	= Inlet Control





HEC-RAS Plan: Default Scenario River: DrainagePath 1 Reach: 1 Profile: PF# 1

Reach	River Sta	Profile	Q Total (cfs)	Min Ch El (ft)	W.S. Elev (ft)	Crit W.S. (ft)	E.G. Elev (ft)	E.G. Slope (ft/ft)	Vel Chnl (ft/s)	Flow Area (sq ft)	Top Width (ft)	Froude # Chl	Shear LOB (lb/sq ft)	Shear Chan (lb/sq ft)	Shear ROB (lb/sq ft)
1	1006	PF# 1	176.00	6948.00	6951.91	6949.64	6951.96	0.001344	1.15	124.88	51.48	0.11	0.01	0.26	0.12
1	1005.5	PF# 1	176.00	6948.00	6951.90	6949.15	6951.93	0.000286	0.62	180.87	53.48	0.06	0.05	0.07	0.03
1	1005	PF# 1	176.00	6946.00	6951.90	6947.17	6951.91	0.000162	0.60	230.93	48.75	0.04	0.03	0.06	0.02
1	1004.9	PF# 1	176.00	6944.00	6951.90	6945.43	6951.91	0.000056	0.43	323.32	53.28	0.03	0.01	0.03	0.01
1	1003.9	PF# 1	176.00	6942.00	6951.90	6943.46	6951.90	0.000006	0.16	484.35	65.44	0.01	0.00	0.00	0.00
1	1003.7		Culvert												
1	1003.4	PF# 1	176.00	6939.06	6940.68	6940.66	6941.19	0.024549	3.21	35.23	33.96	0.44	1.19	2.48	1.05
1	1003	PF# 1	176.00	6936.00	6938.73	6938.73	6939.77	0.081231	6.20	24.95	14.94	0.79	4.27	8.99	
1	1002.5	PF# 1	176.00	6936.00	6936.94	6937.07	6937.59	0.024915	2.11	33.48	39.47	0.40	1.30	1.33	
1	1002	PF# 1	176.00	6934.00	6935.54	6935.19	6935.79	0.035765	3.44	47.01	44.10	0.52	1.02	3.02	
1	1001.6	PF# 1	176.00	6932.00	6933.64	6933.43	6934.00	0.054100	4.19	38.74	37.47	0.63	1.45	4.51	
1	1001	PF# 1	176.00	6928.00	6930.09	6929.84	6930.66	0.078747	5.96	29.22	18.69	0.78		8.40	1.90
1	1000.5	PF# 1	176.00	6926.00	6927.63	6927.63	6928.30	0.041625	3.93	35.58	25.68	0.56		3.83	2.49
1	1000	PF# 1	176.00	6924.00	6924.55	6924.83	6925.51	0.076573	2.77	31.13	57.53	0.66	1.85	2.64	2.56

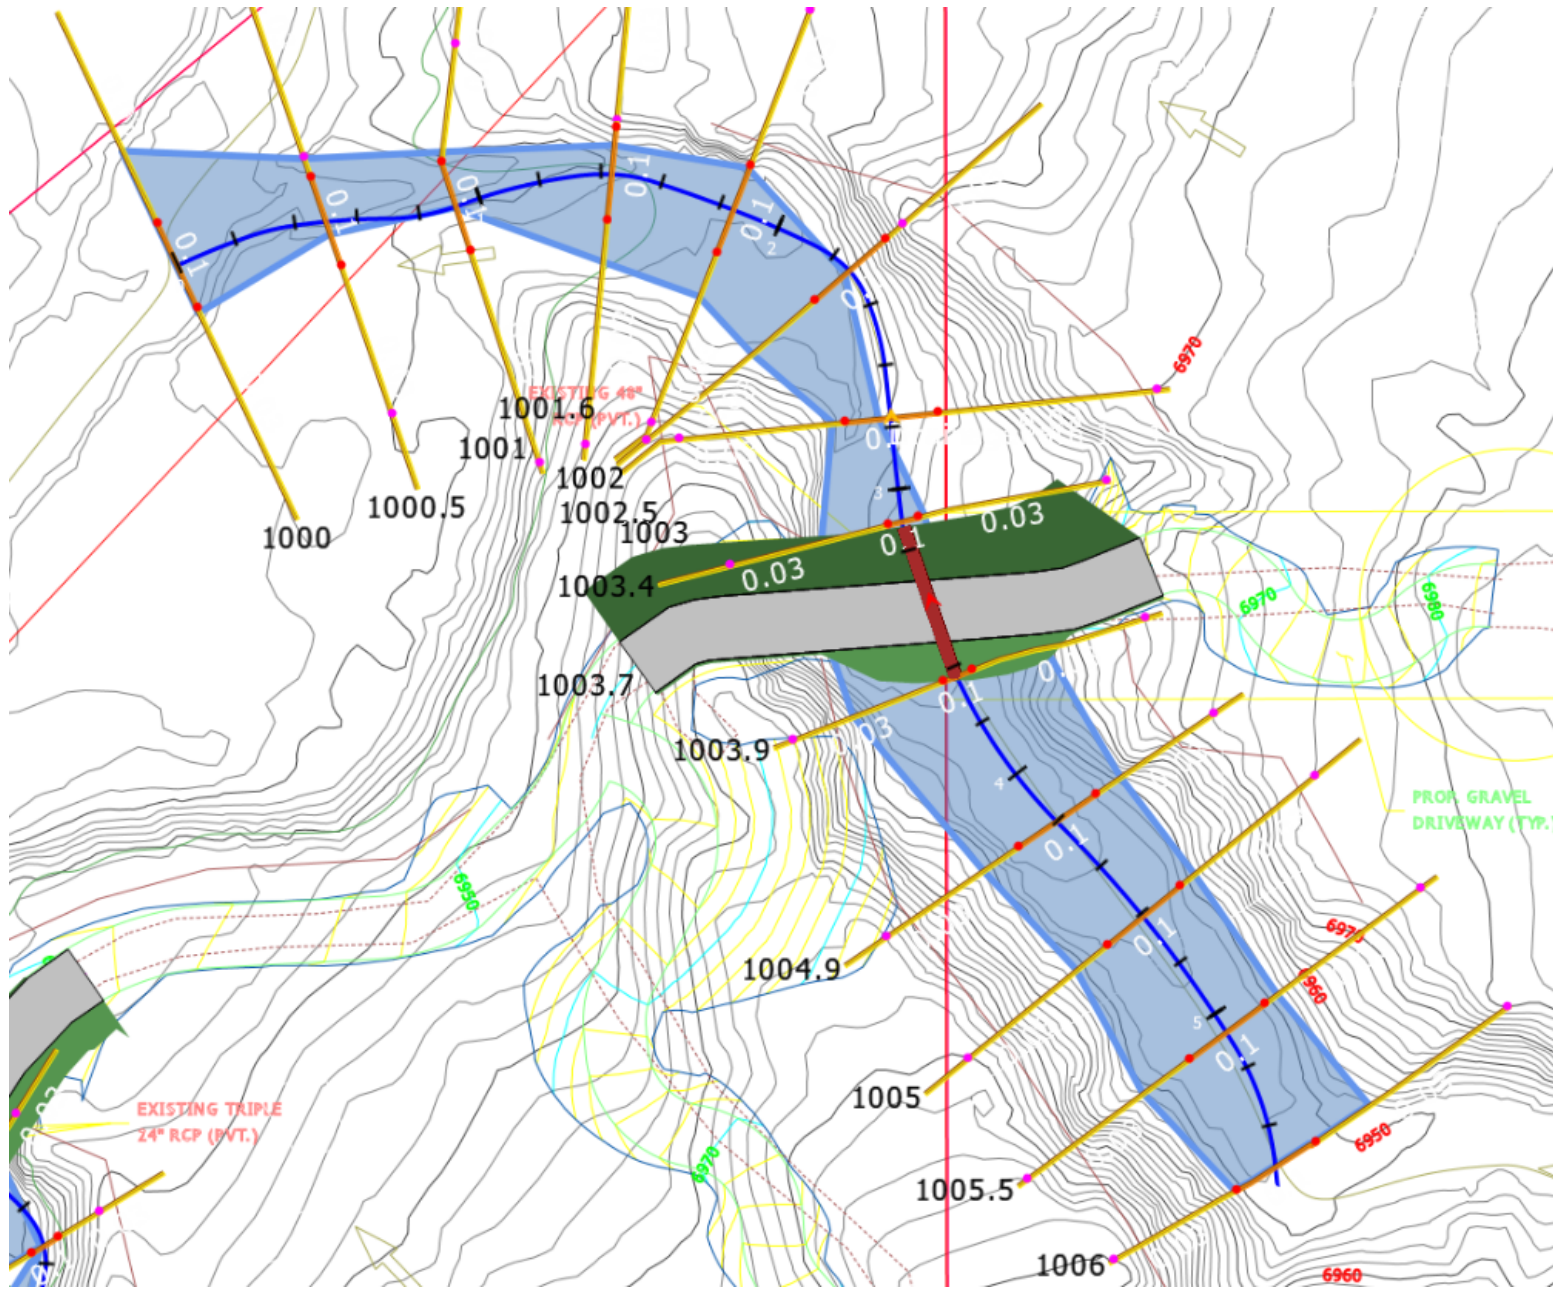



HEC-RAS Model Plan: Default Scenario 10/9/2024

RS = 1006

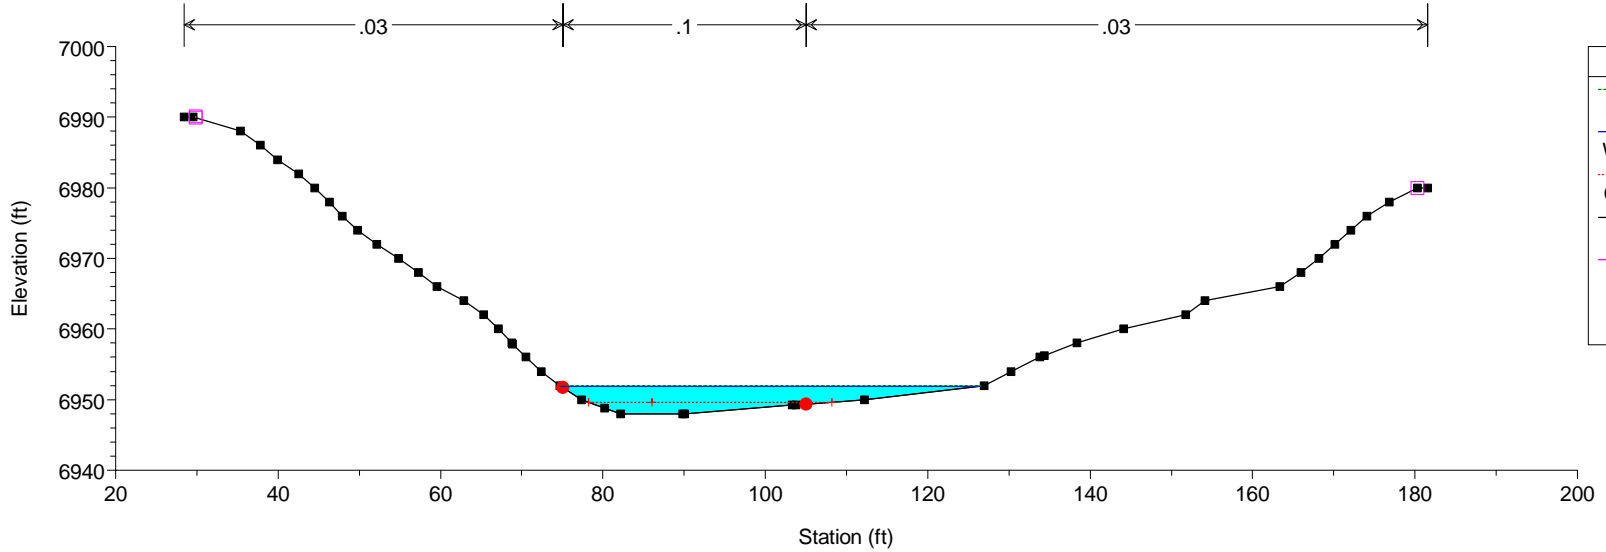


HEC-RAS Model Plan: Default Scenario 10/9/2024

RS = 1005.5

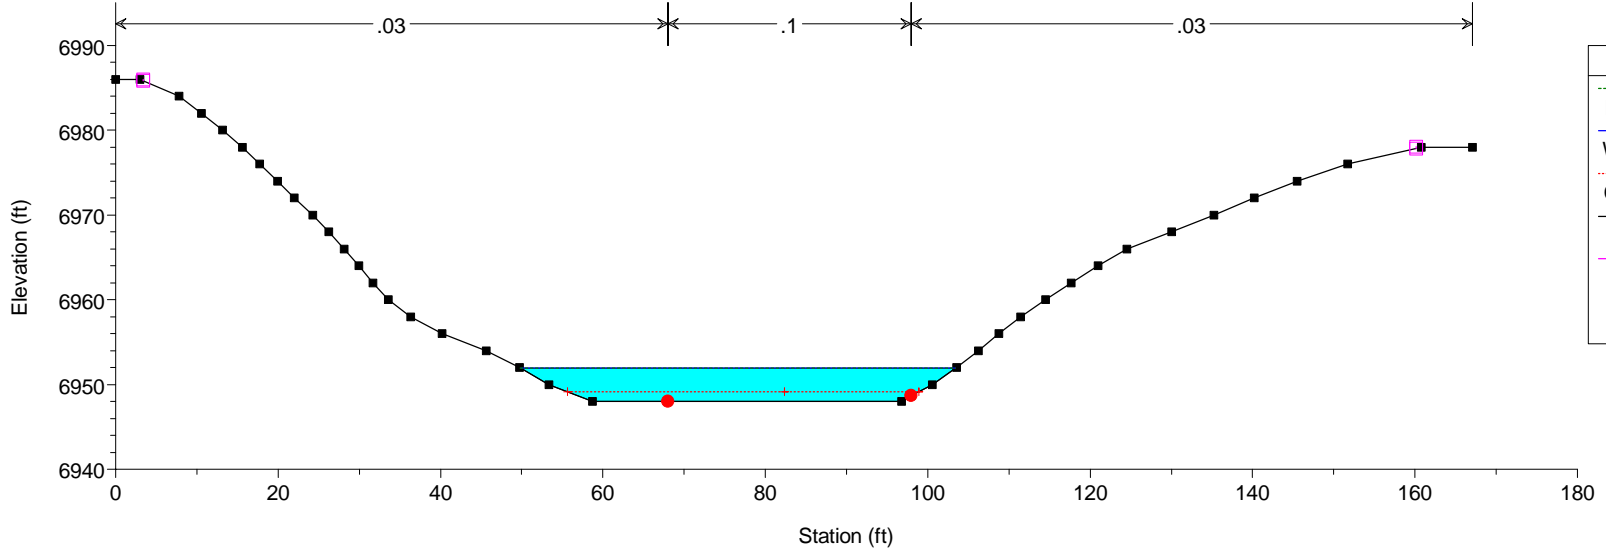

HEC-RAS Model Plan: Default Scenario 10/9/2024


RS = 1005

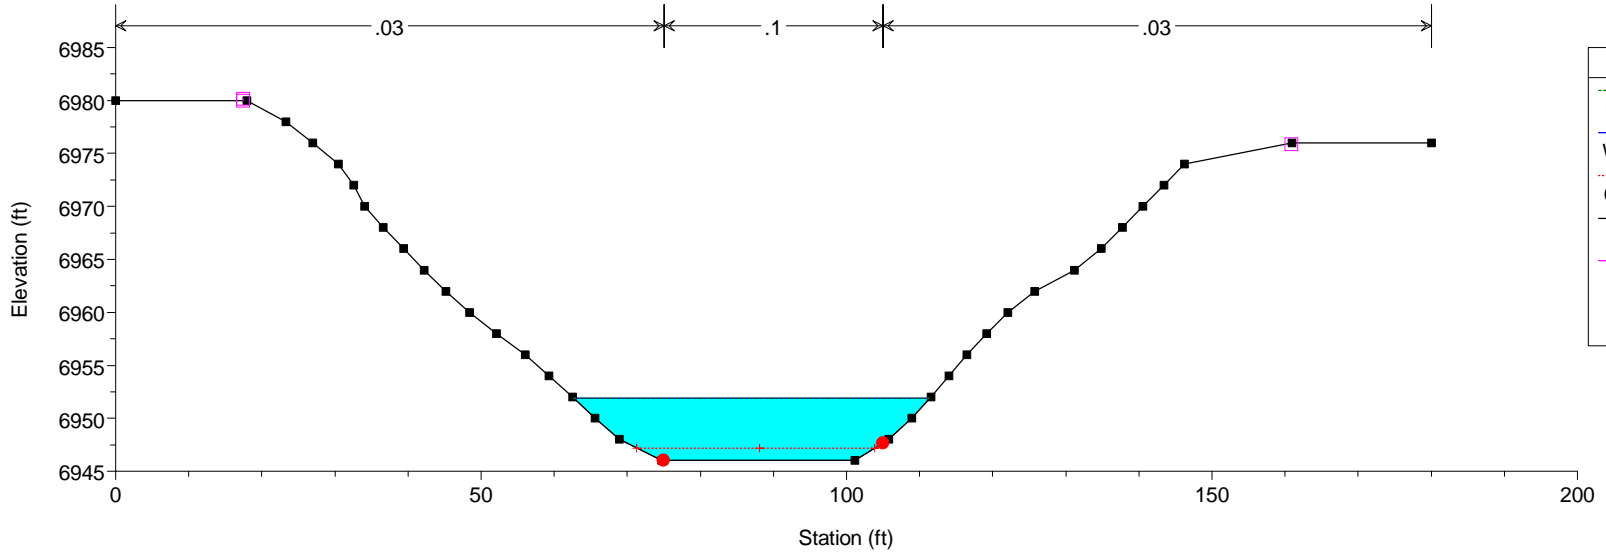

Legend	
EG PF# 1	--- ---
WS PF# 1	— —
Crit PF# 1	---+---
Ground	—■—
Levee	—□—
Bank Sta	●

HEC-RAS Model Plan: Default Scenario 10/9/2024

RS = 1004.9

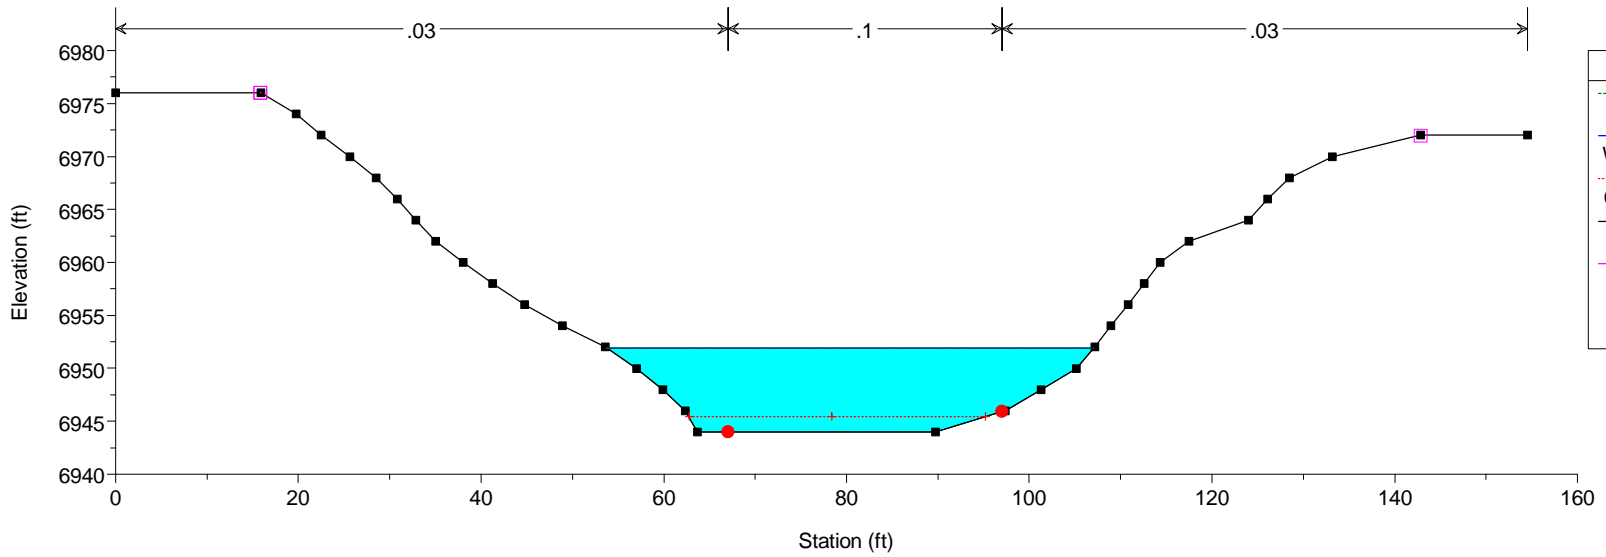


Legend	
EG PF# 1	--- ---
WS PF# 1	— —
Crit PF# 1	---+---
Ground	—■—
Levee	—□—
Bank Sta	●



HEC-RAS Model Plan: Default Scenario 10/9/2024


RS = 1003.9

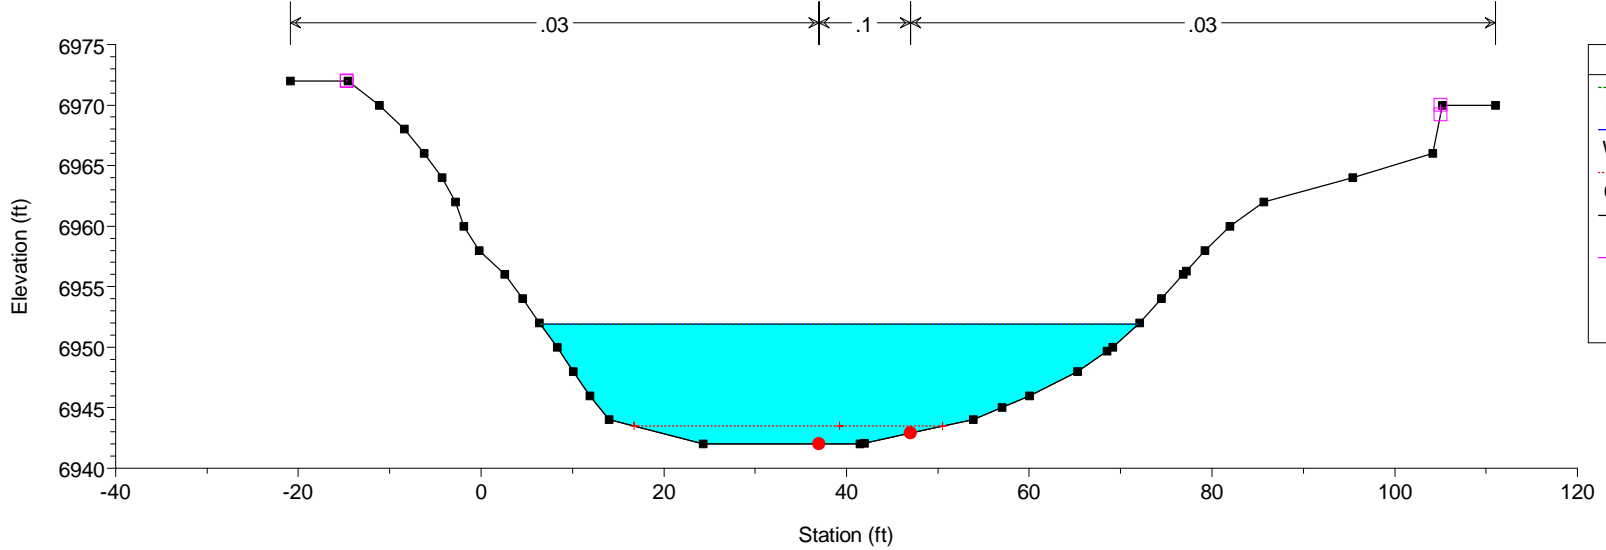


Legend	
EG PF# 1	--- ---
WS PF# 1	— —
Crit PF# 1	- - - + - - -
Ground	— ■—
Levee	— □—
Bank Sta	●


HEC-RAS Model Plan: Default Scenario 10/9/2024

RS = 1003.7 Culv

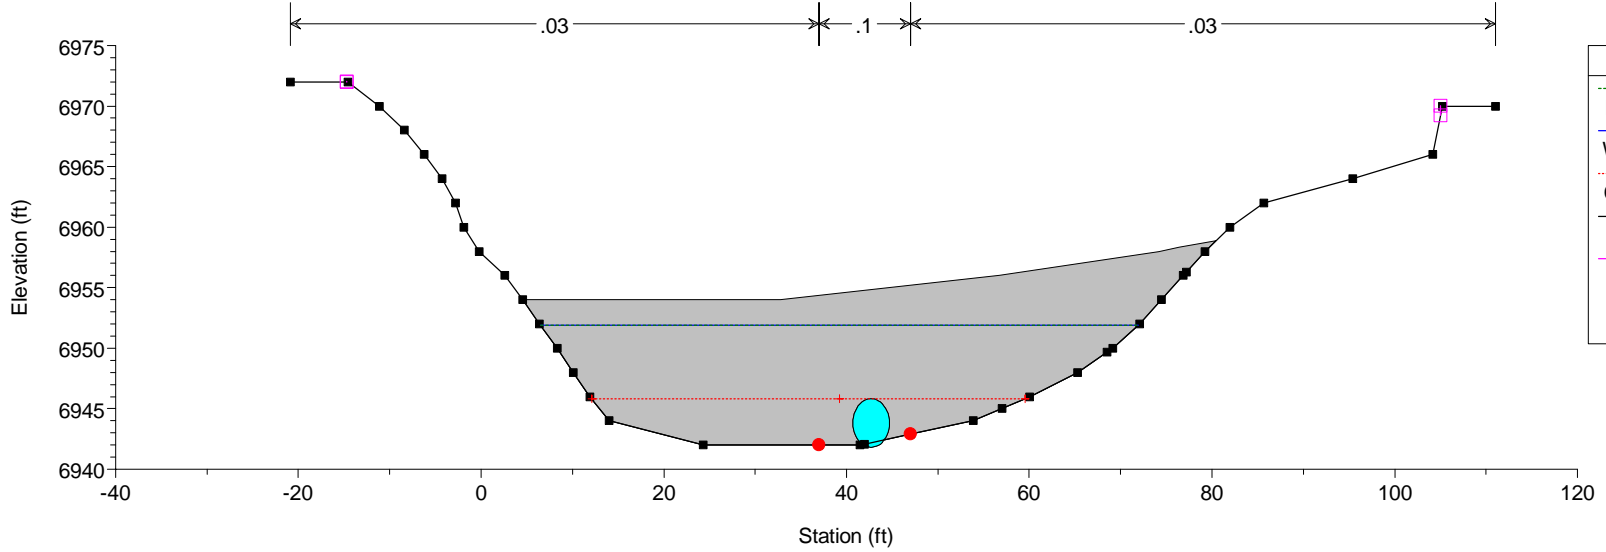


Legend	
EG PF# 1	--- ---
WS PF# 1	— —
Crit PF# 1	- - - + - - -
Ground	— ■—
Levee	— □—
Bank Sta	●

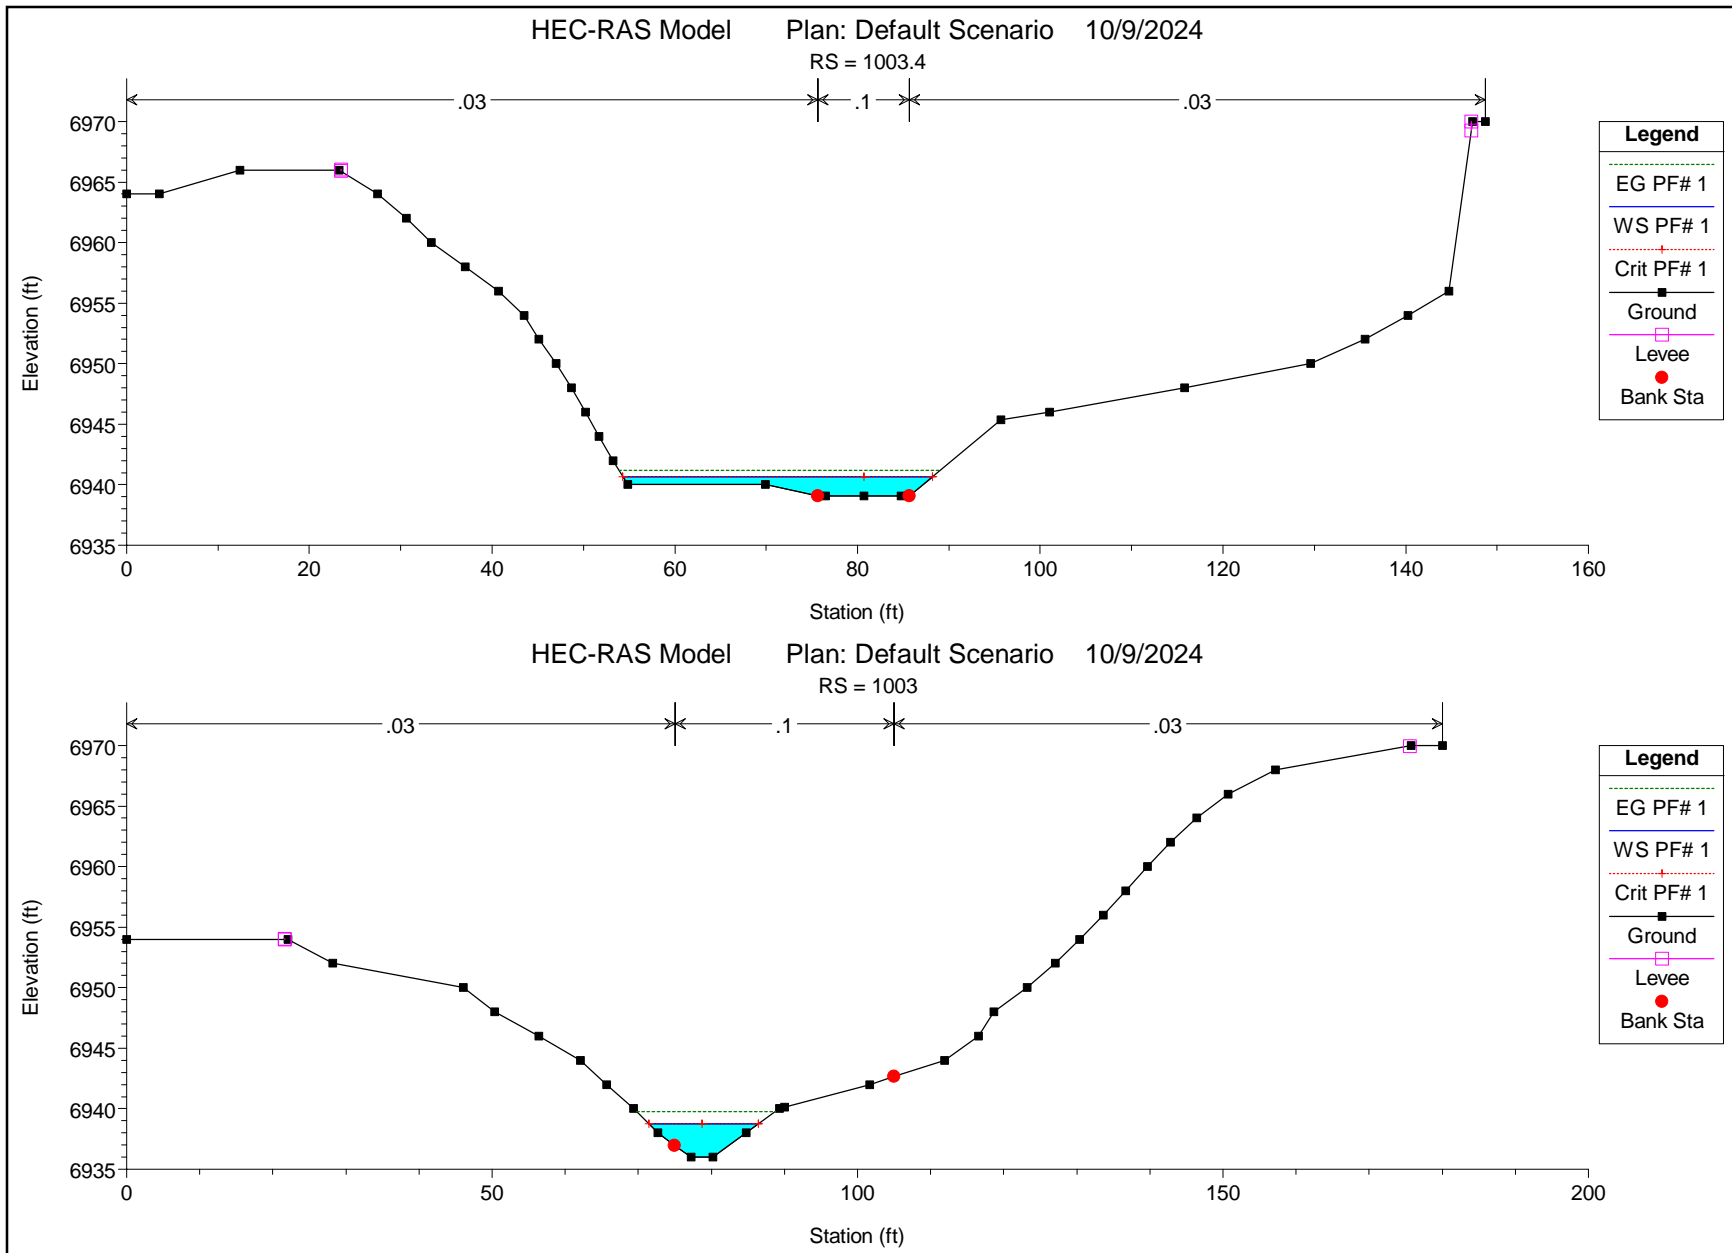

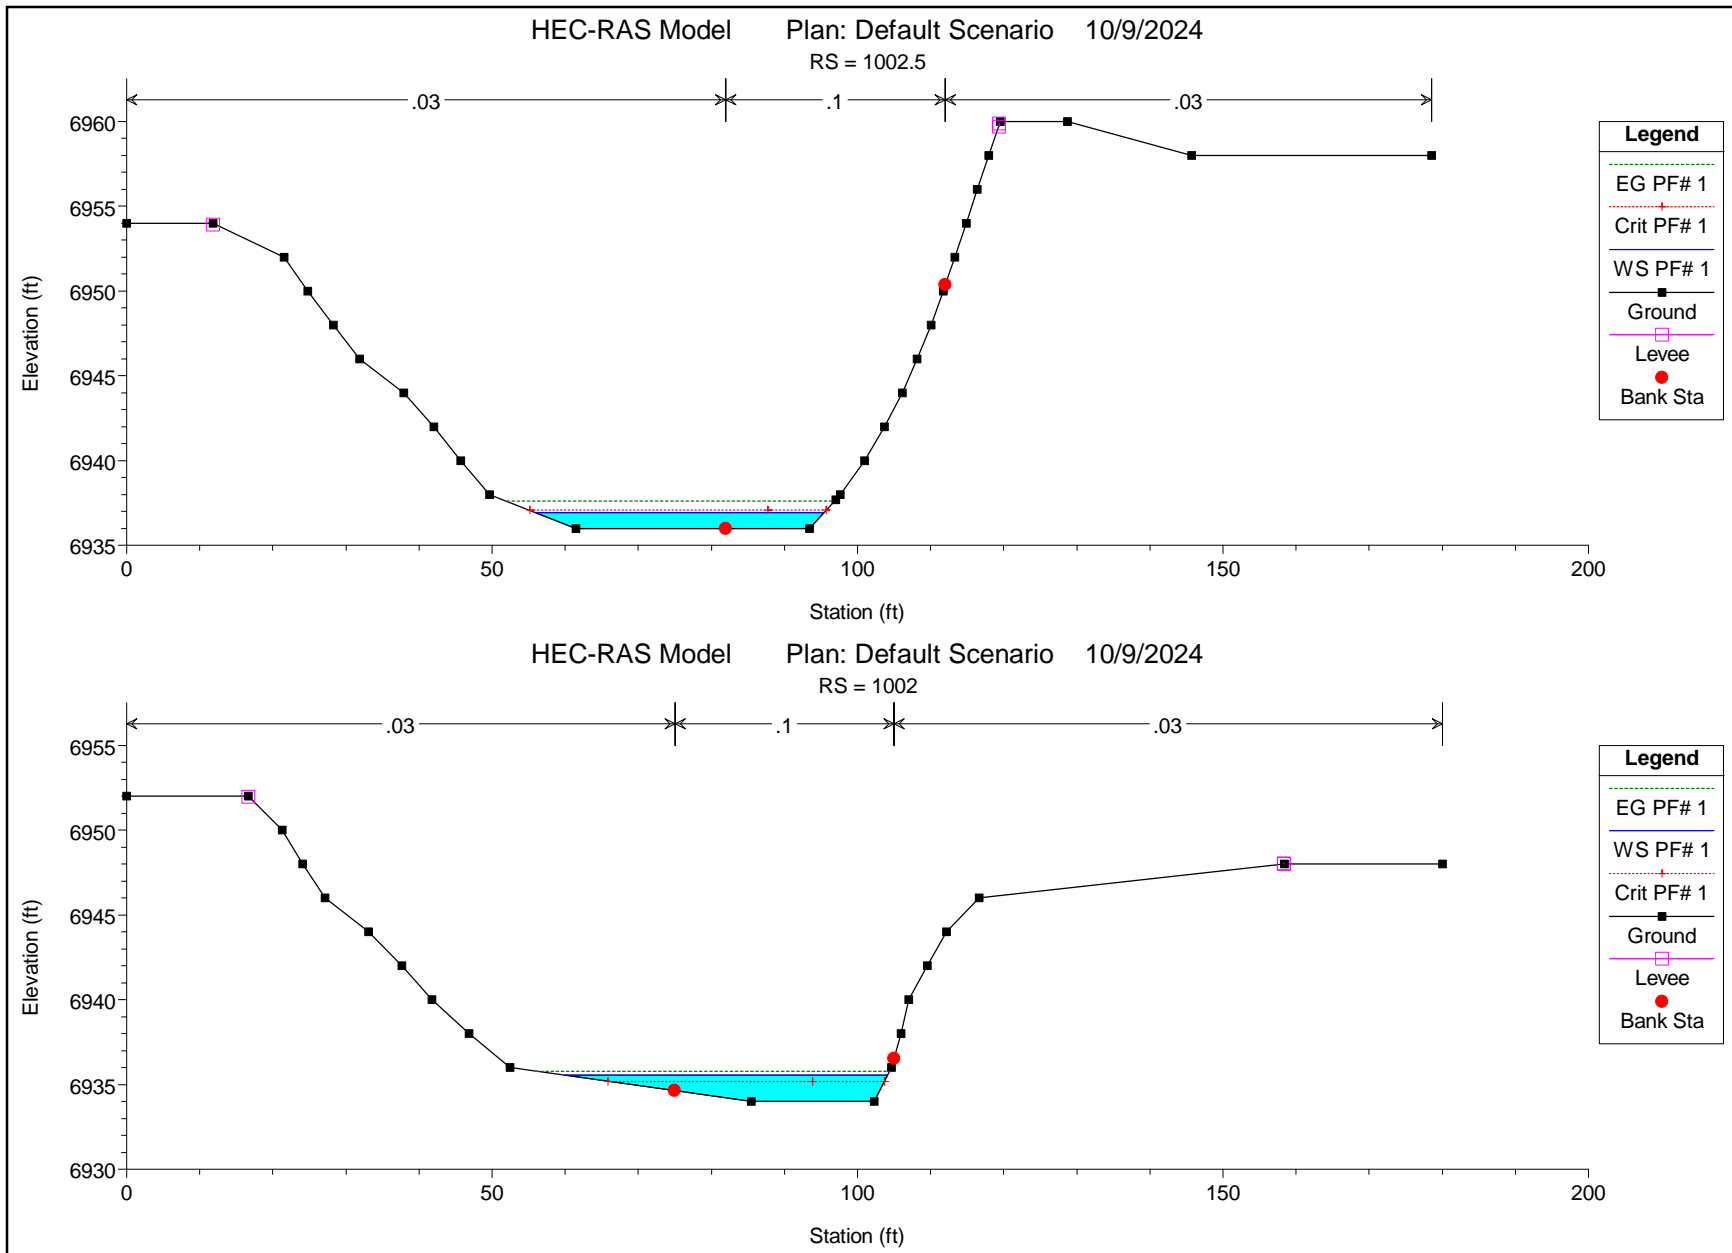


HEC-RAS Model Plan: Default Scenario 10/9/2024  
RS = 1001.6

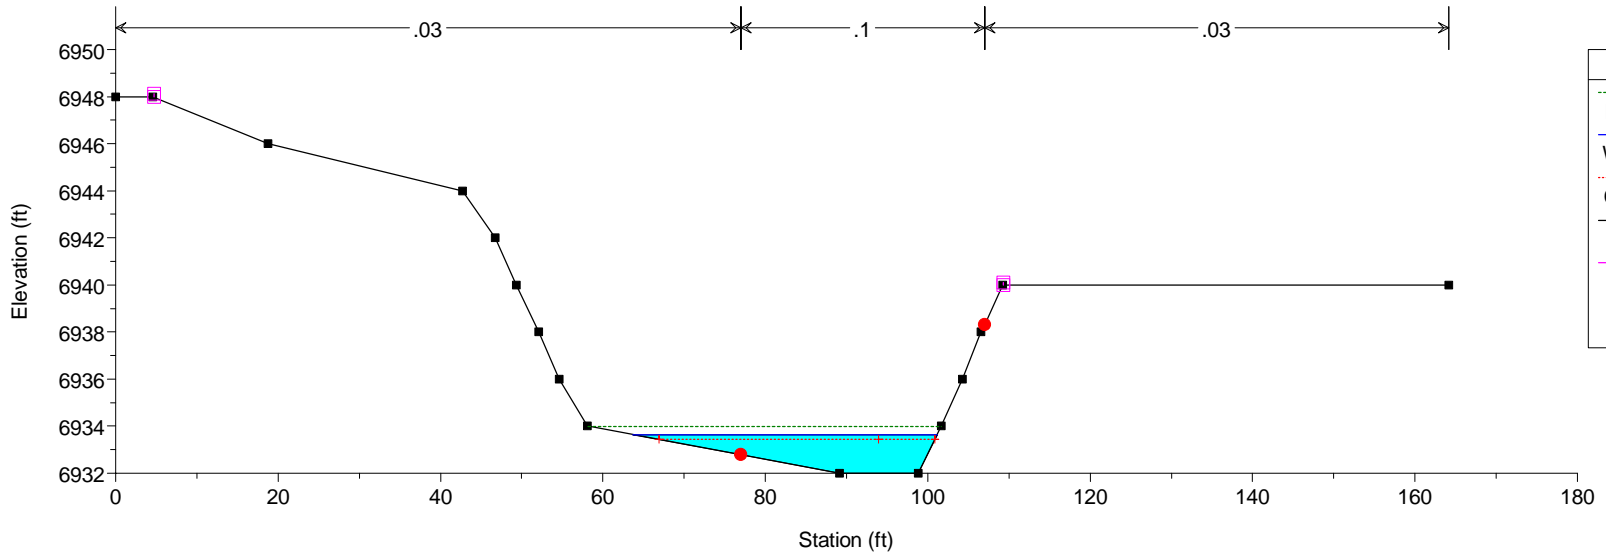


Legend	
EG PF# 1	(Green dashed line with crosses)
WS PF# 1	(Blue solid line)
Crit PF# 1	(Red dashed line with crosses)
Ground	(Black solid line with squares)
Levee	(Magenta solid line with squares)
Bank Sta	(Red solid circle)


HEC-RAS Model Plan: Default Scenario 10/9/2024  
RS = 1001

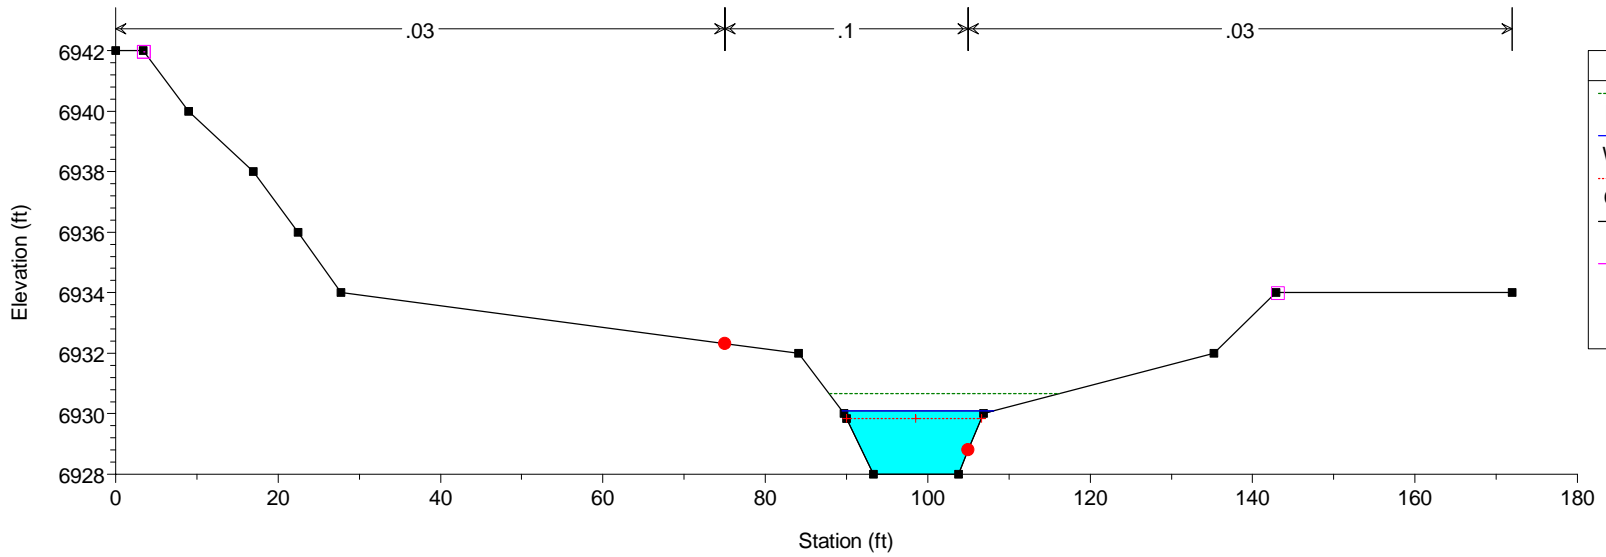

Legend	
EG PF# 1	(Green dashed line with crosses)
WS PF# 1	(Blue solid line)
Crit PF# 1	(Red dashed line with crosses)
Ground	(Black solid line with squares)
Levee	(Magenta solid line with squares)
Bank Sta	(Red solid circle)

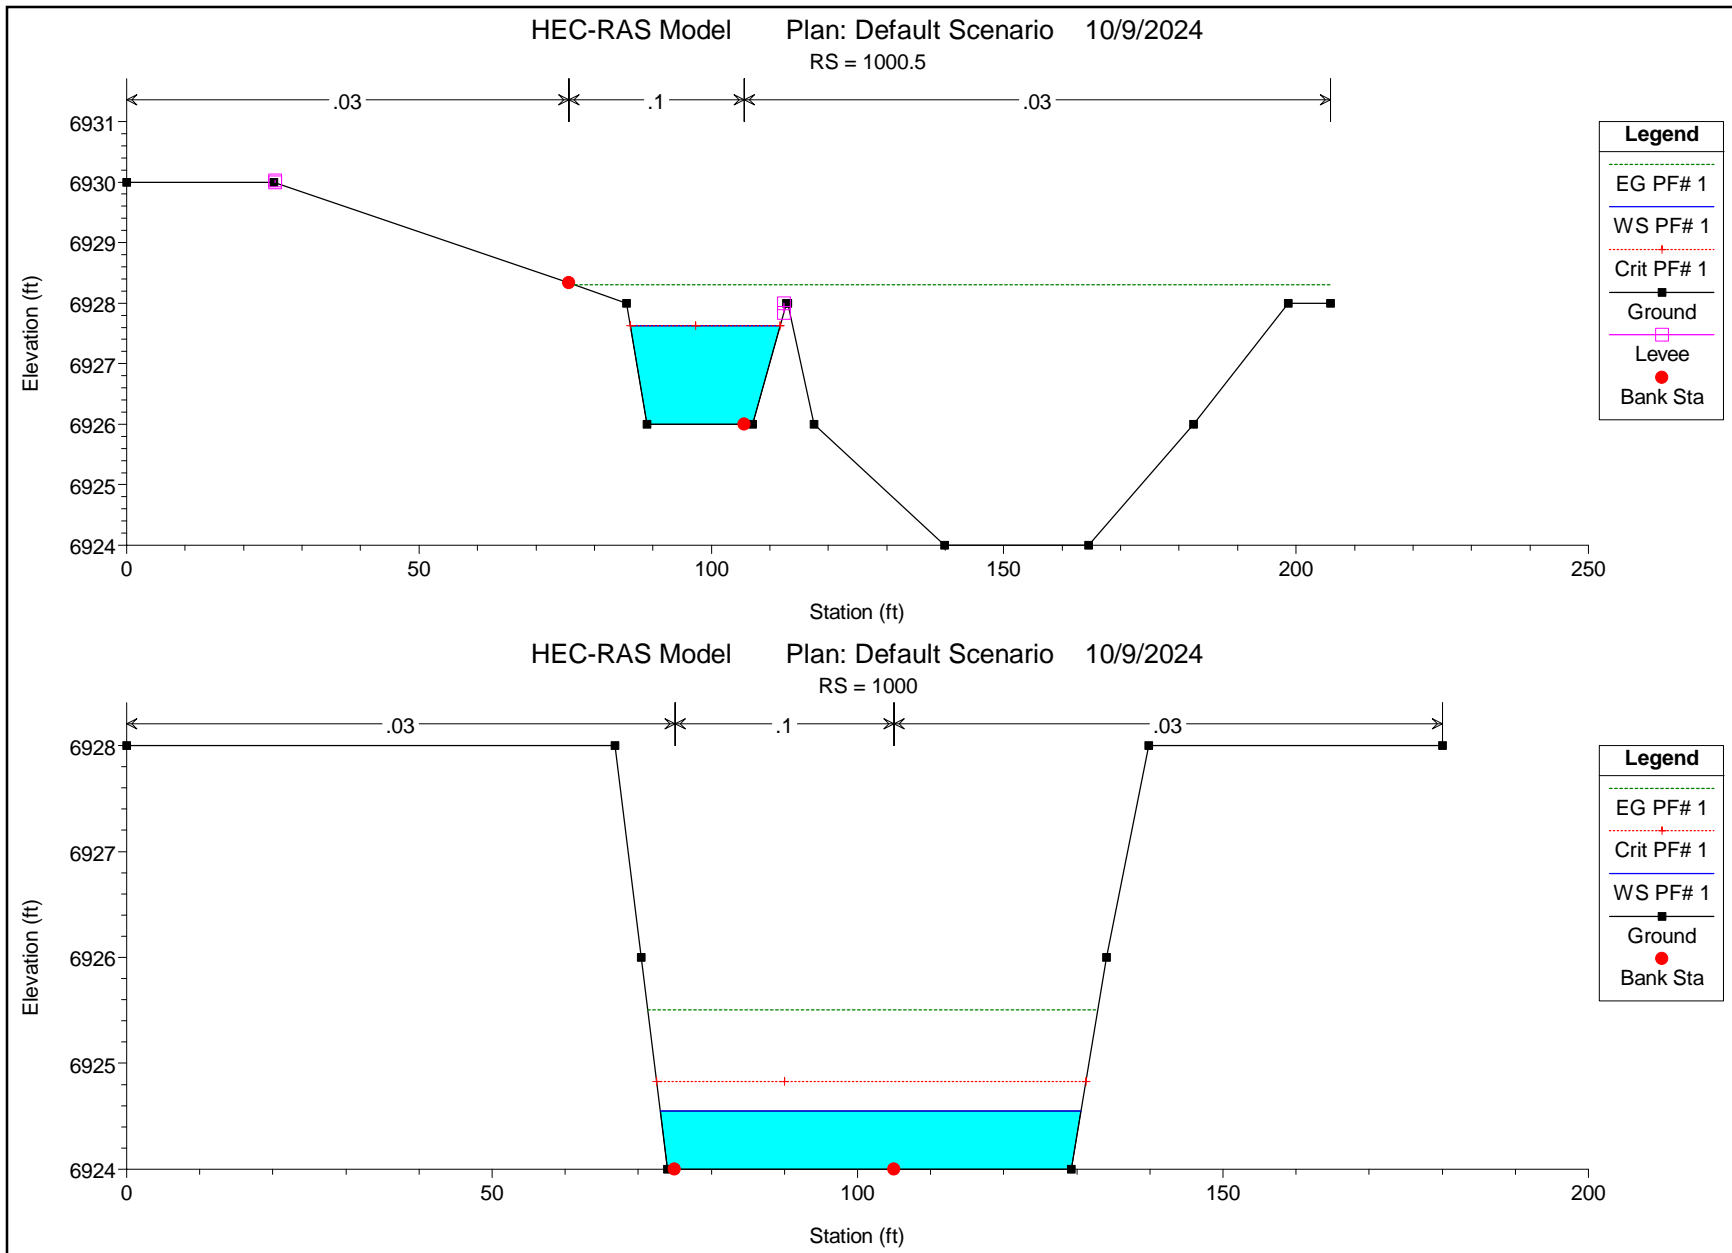

DrainagePath 1 1

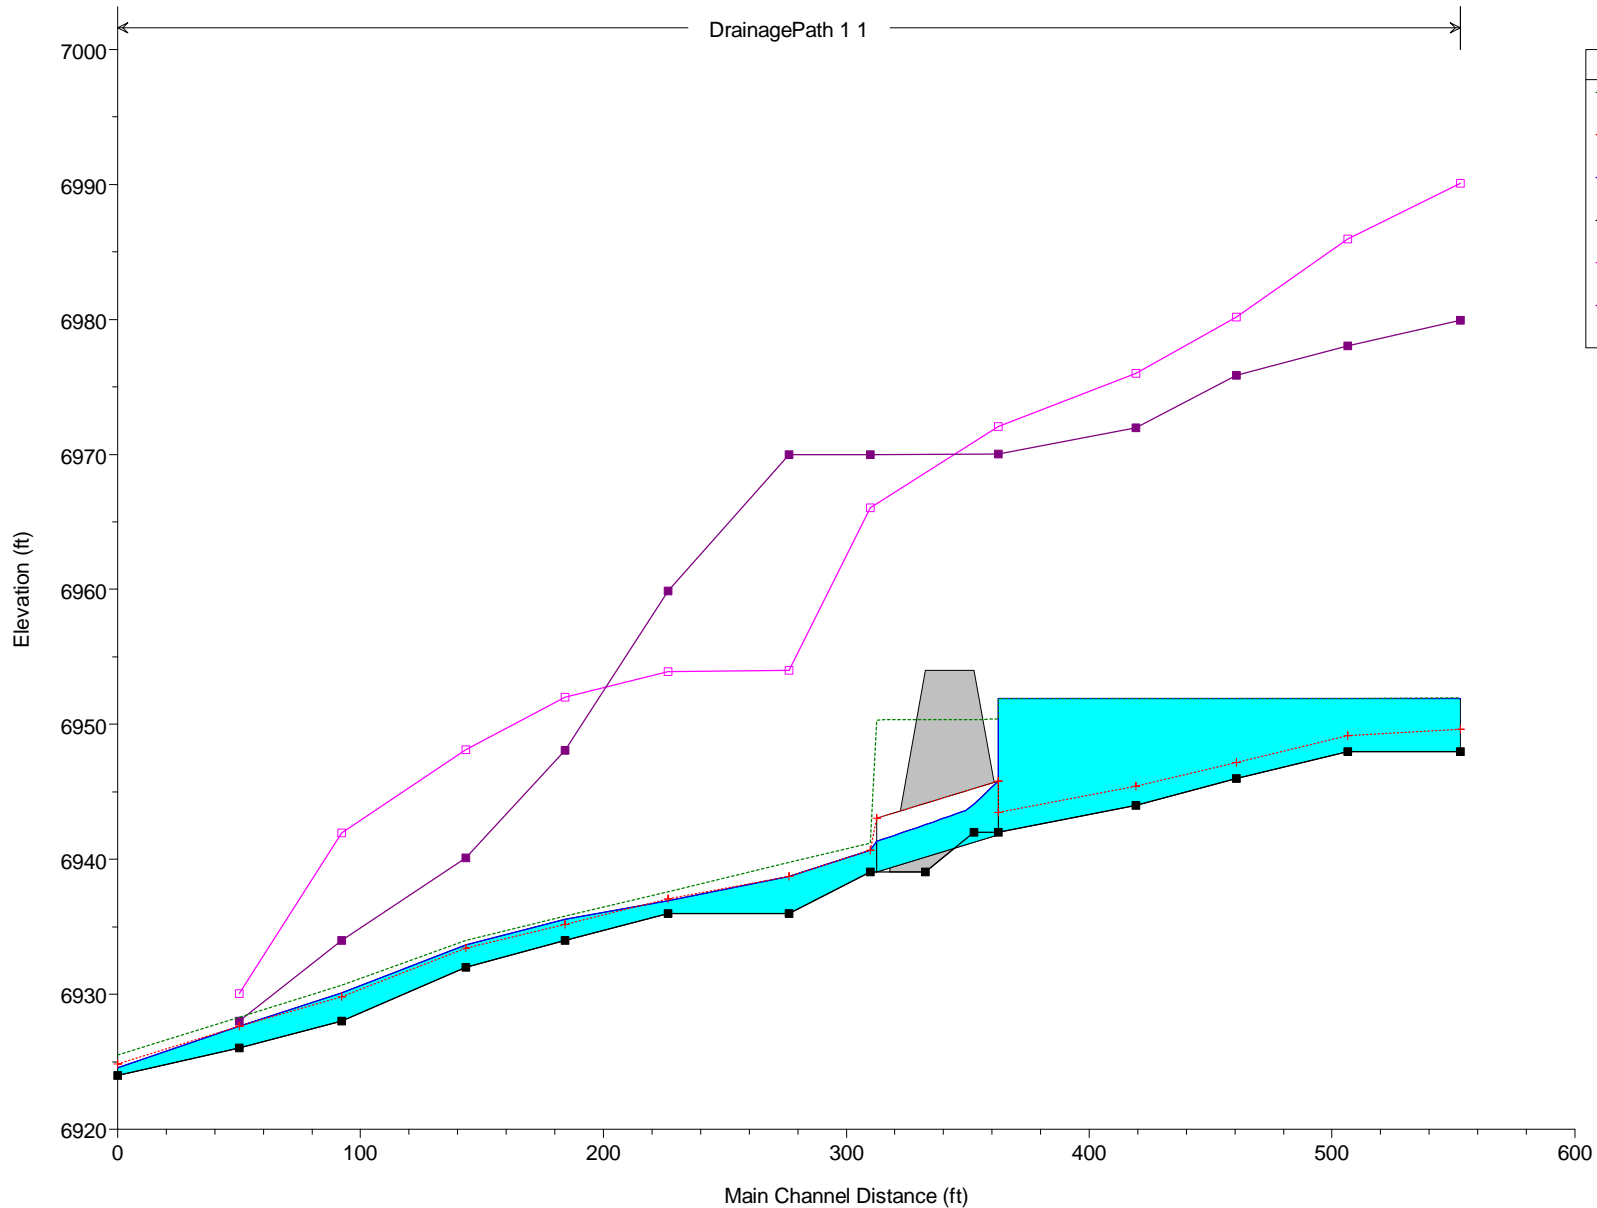


**Legend**


- EG PF# 1
- Crit PF# 1
- WS PF# 1
- Ground
- Left Levee
- Right Levee


HEC-RAS Plan: Default Scenario River: DrainagePath 2 Reach: 2 Profile: PF# 1

Reach	River Sta	Profile	Q Total (cfs)	Min Ch El (ft)	W.S. Elev (ft)	Crit W.S. (ft)	E.G. Elev (ft)	E.G. Slope (ft/ft)	Vel Chnl (ft/s)	Flow Area (sq ft)	Top Width (ft)	Froude # Chl	Shear LOB (lb/sq ft)	Shear Chan (lb/sq ft)	Shear ROB (lb/sq ft)
2	1011	PF# 1	12.50	7004.92	7004.18	7004.28	7004.53	0.104321		2.62	15.90	0.00	1.05		1.07
2	1010.4	PF# 1	12.50	6988.00	6988.32	6988.52	6989.00	1.314867	6.60	1.89	7.77	2.36		19.79	
2	1009.9	PF# 1	12.50	6987.62	6984.75	6984.61	6984.88	0.008089		4.32	8.03	0.00			0.26
2	1009.6	PF# 1	12.50	6985.60	6984.36	6984.36	6984.51	0.018480		4.00	12.52	0.00			0.37
2	1009	PF# 1	12.50	6980.00	6980.08	6980.24	6981.22	1.058856	2.89	1.90	23.63	1.78	4.79	5.42	5.26
2	1008.5	PF# 1	12.50	6976.00	6976.35	6976.40	6976.59	0.032509	1.23	3.81	11.77	0.38		0.63	0.65
2	1008	PF# 1	12.50	6972.00	6972.22	6972.43	6973.00	0.222414	2.53	2.55	11.77	0.95		3.01	2.94
2	1007.5	PF# 1	12.50	6968.00	6968.42	6968.52	6968.77	0.048287	1.59	3.54	10.29	0.48		1.02	1.03
2	1007	PF# 1	12.50	6964.00	6964.56	6964.72	6965.12	0.107183	2.78	3.12	7.29	0.74	2.46	2.89	
2	1006.6	PF# 1	12.50	6962.00	6962.55	6962.45	6962.70	0.052671	2.19	4.95	10.24	0.53	0.96	1.69	
2	1006	PF# 1	12.50	6958.00	6958.58	6958.58	6958.83	0.093416	2.94	3.78	7.38	0.71	1.76	3.04	
2	1005.8	PF# 1	12.50	6956.00	6956.54	6956.59	6956.84	0.048885	2.05	4.31	8.73	0.51	1.27	1.50	
2	1005.5	PF# 1	12.50	6954.00	6954.35	6954.53	6954.91	0.078708	1.89	2.69	8.31	0.60	1.59	1.50	
2	1005.1	PF# 1	12.50	6952.00	6952.32	6952.40	6952.64	0.047787	1.42	3.45	11.35	0.46	0.91	0.86	
2	1004.5	PF# 1	12.50	6948.00	6948.24	6948.42	6948.83	0.126237	1.94	2.51	11.06	0.72	1.79	1.75	
2	1004	PF# 1	12.50	6946.00	6946.40	6946.40	6946.57	0.035516	1.49	5.43	14.90	0.42	0.68	0.86	
2	1003.5	PF# 1	12.50	6942.00	6942.56	6942.63	6942.90	0.299013	4.65	2.69	5.94	1.22		8.08	
2	1003	PF# 1	12.50	6940.00	6940.68	6940.46	6940.78	0.006701	0.84	6.81	11.22	0.19		0.24	0.25
2	1002.9	PF# 1	12.50	6940.00	6940.47	6940.47	6940.68	0.025803	1.39	5.08	11.43	0.36		0.71	0.67
2	1002.6	PF# 1	12.50	6938.00	6938.20	6938.40	6939.01	0.210120	2.23	2.14	10.92	0.90	2.59	2.46	
2	1002.4	PF# 1	12.50	6936.14	6936.23	6936.33	6936.55	0.063176	0.44	2.77	12.67	0.37	0.87	0.16	
2	1002	PF# 1	12.50	6934.00	6934.25	6934.29	6934.46	0.042570	1.16	4.04	16.78	0.42		0.62	0.64
2	1001.94	PF# 1	12.50	6932.00	6932.17	6932.22	6932.36	0.057234	1.05	3.94	23.74	0.46	0.59	0.57	
2	1001.9	PF# 1	12.50	6928.19	6929.29	6928.57	6929.30	0.001402	0.59	15.94	19.03	0.10	0.05	0.10	0.04
2	1001.4		Culvert												
2	1000.9	PF# 1	12.50	6926.00	6926.60	6926.37	6926.65	0.004213	0.62	8.92	16.82	0.15	0.14	0.13	
2	1000.6	PF# 1	12.50	6926.00	6926.27	6926.27	6926.40	0.021540	0.87	5.17	19.66	0.30	0.36	0.34	
2	1000	PF# 1	12.50	6920.11	6920.08	6920.30	6922.27	1.750225		1.05	13.67	0.00			8.41

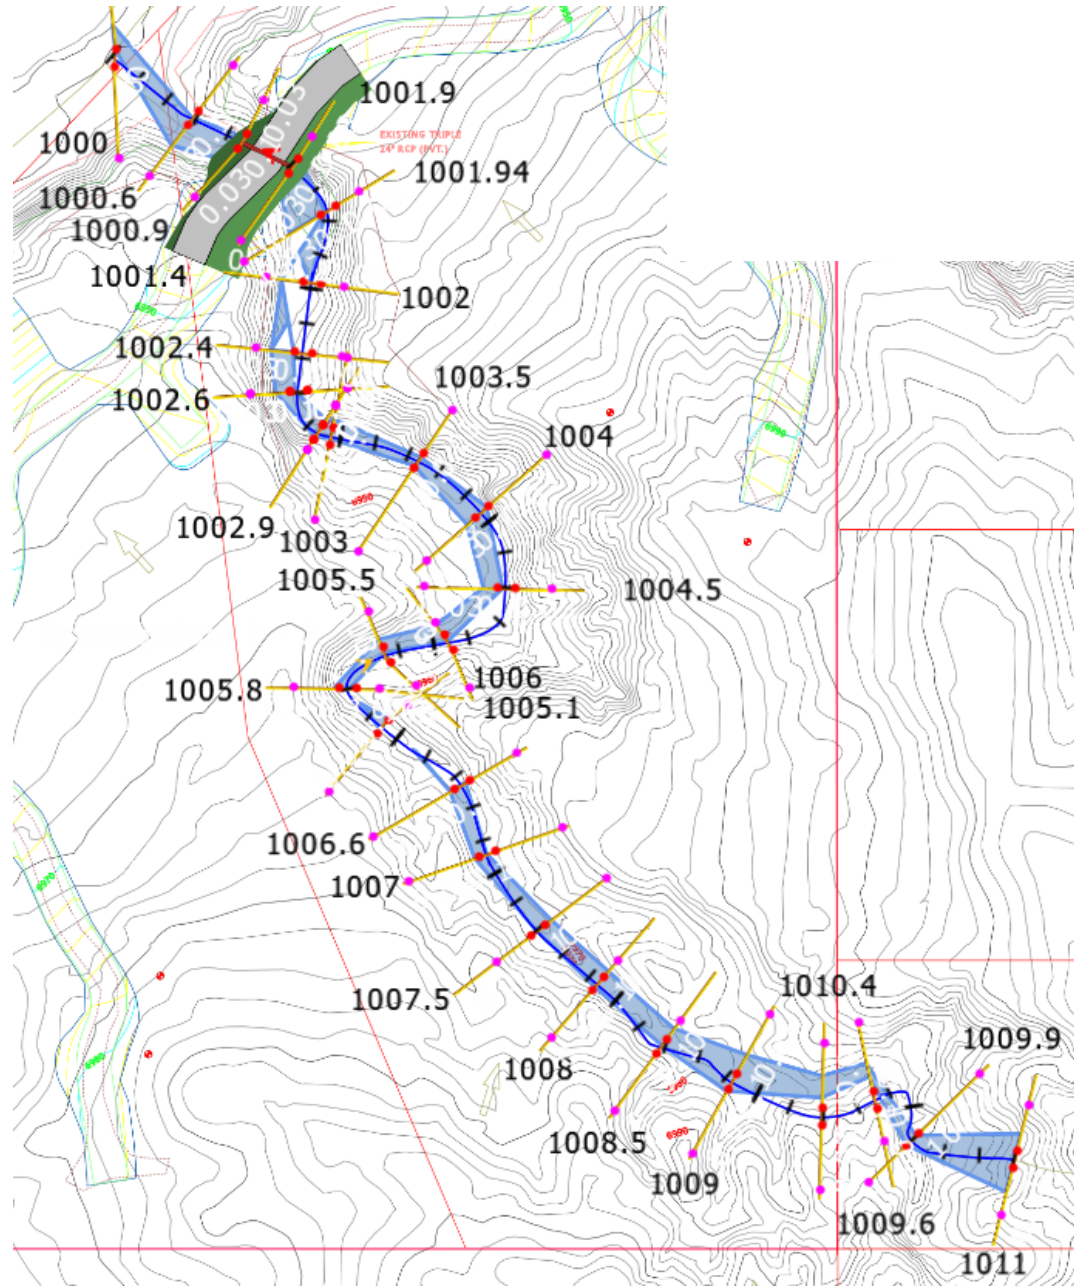




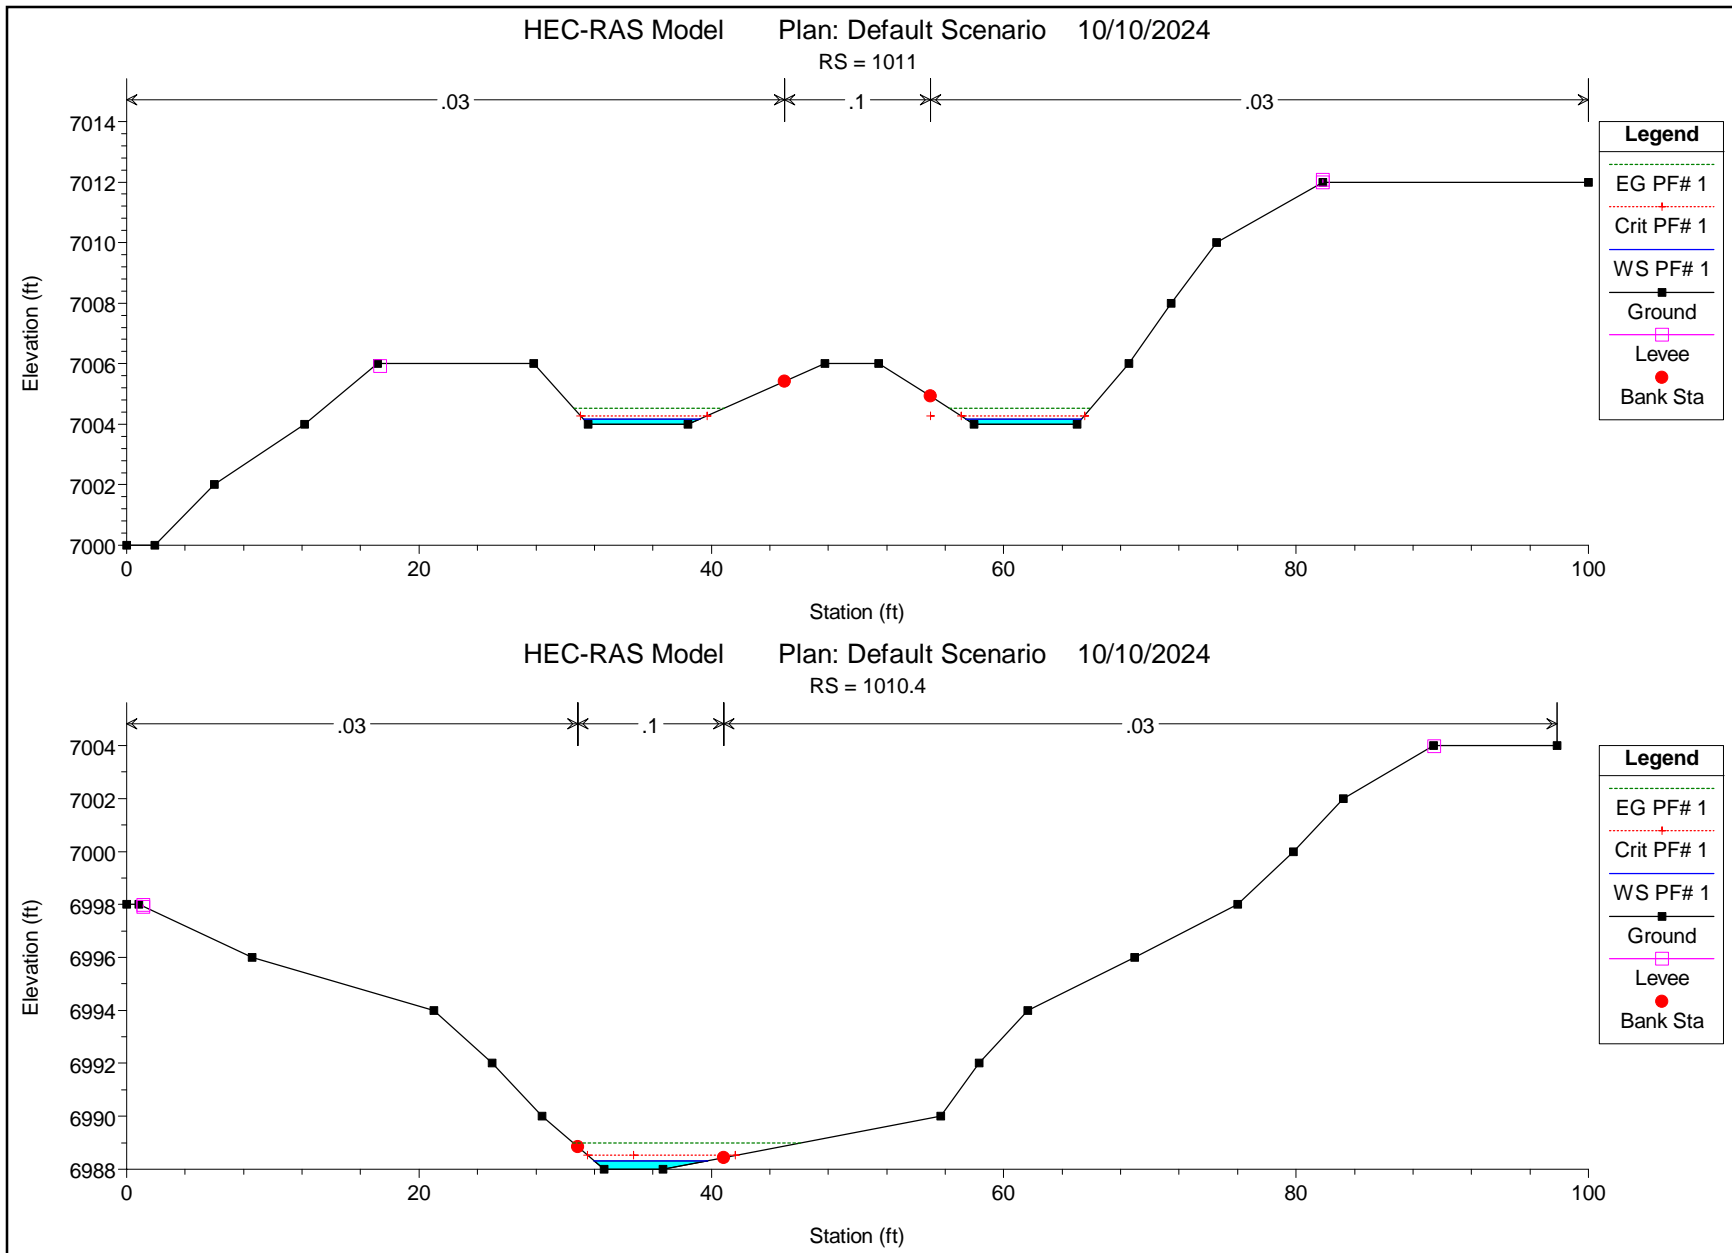


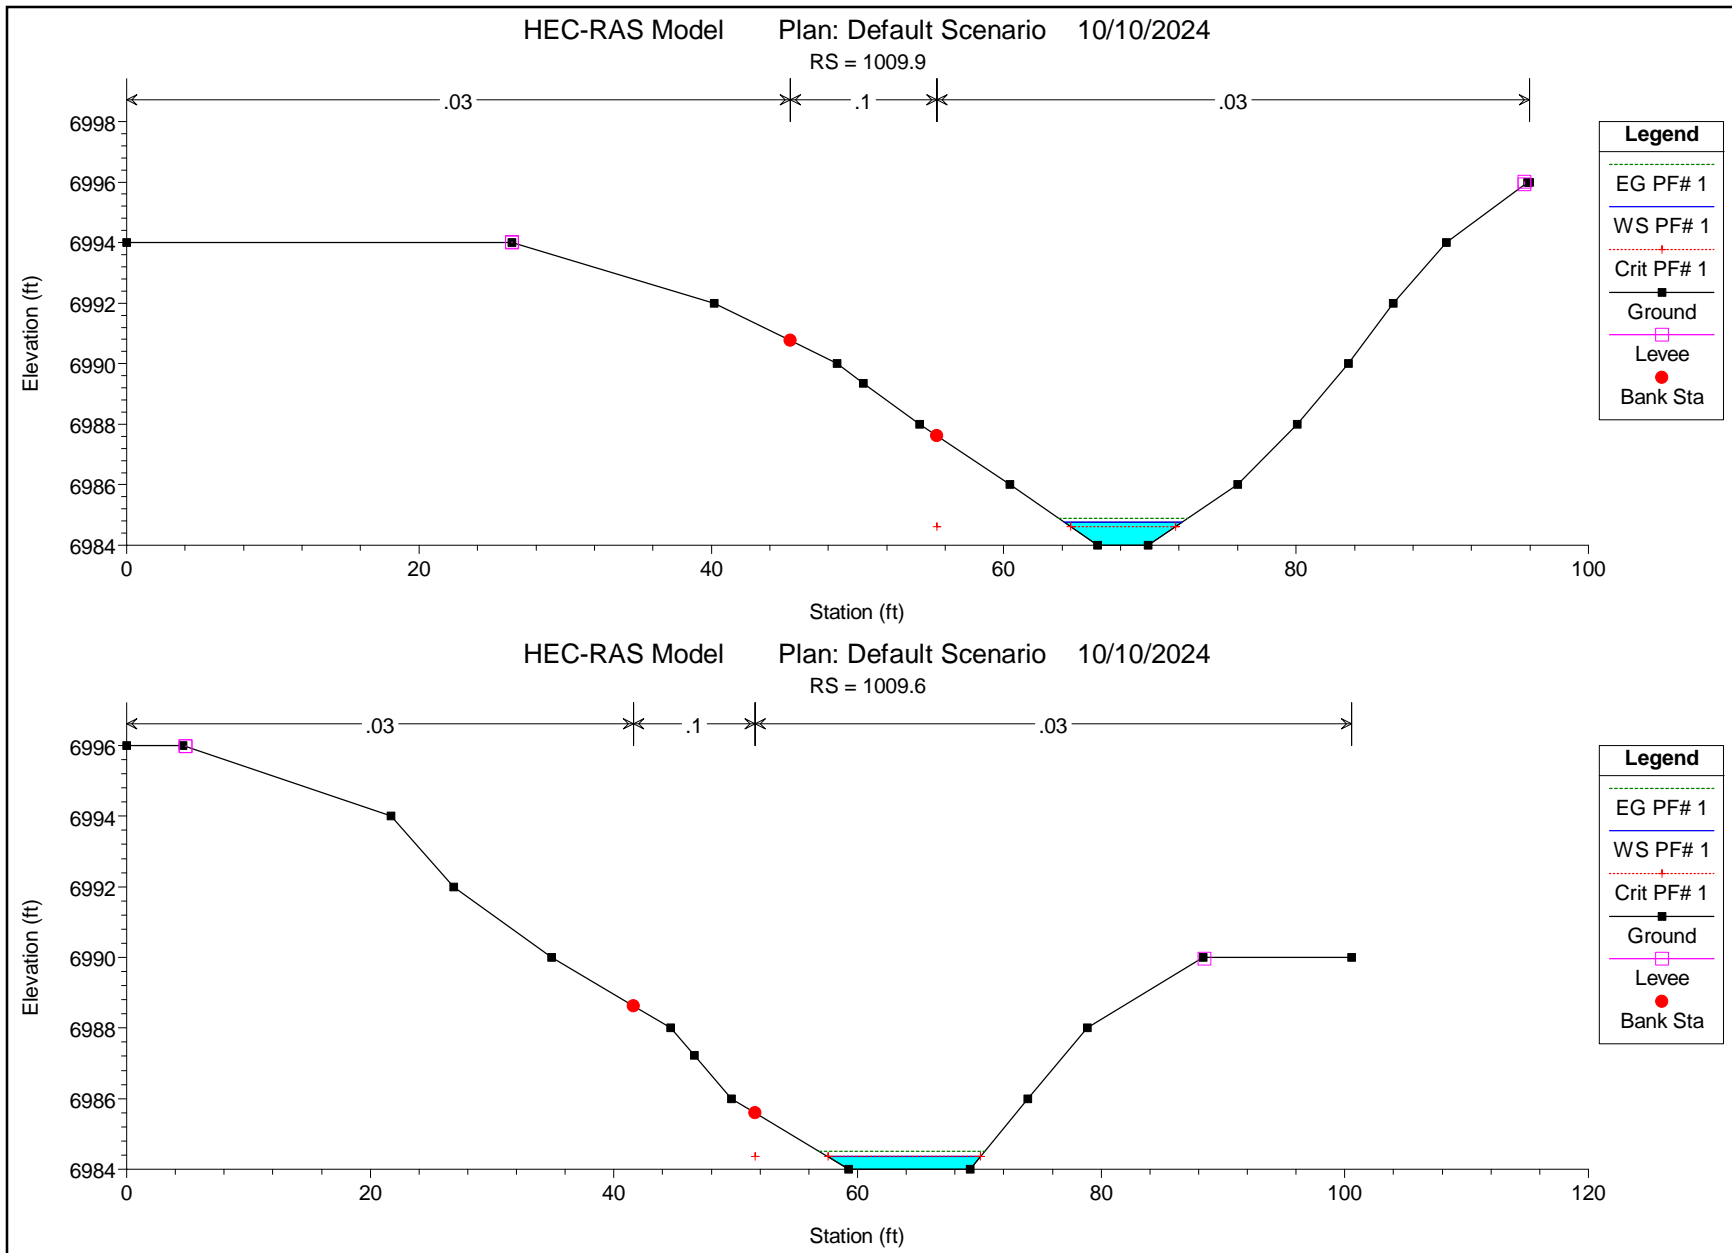



HEC-RAS Model Plan: Default Scenario 10/10/2024  
RS = 1009

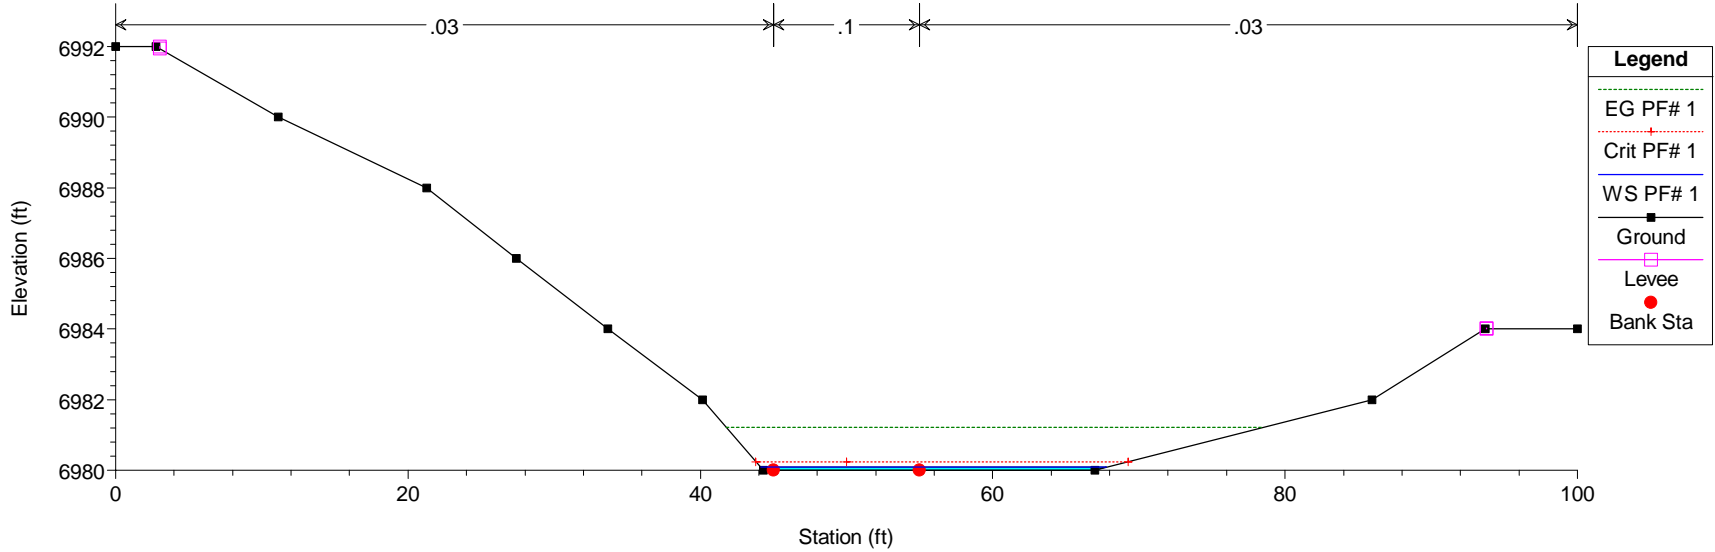



HEC-RAS Model Plan: Default Scenario 10/10/2024  
RS = 1008.5

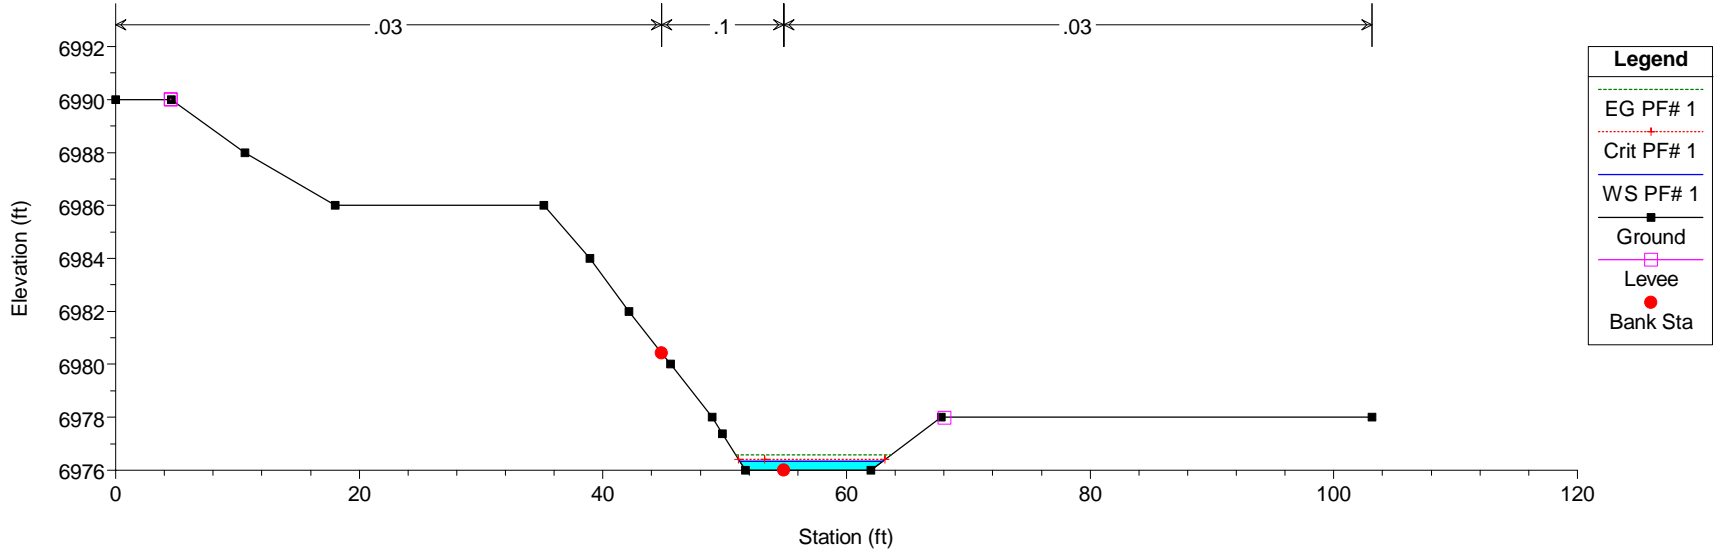


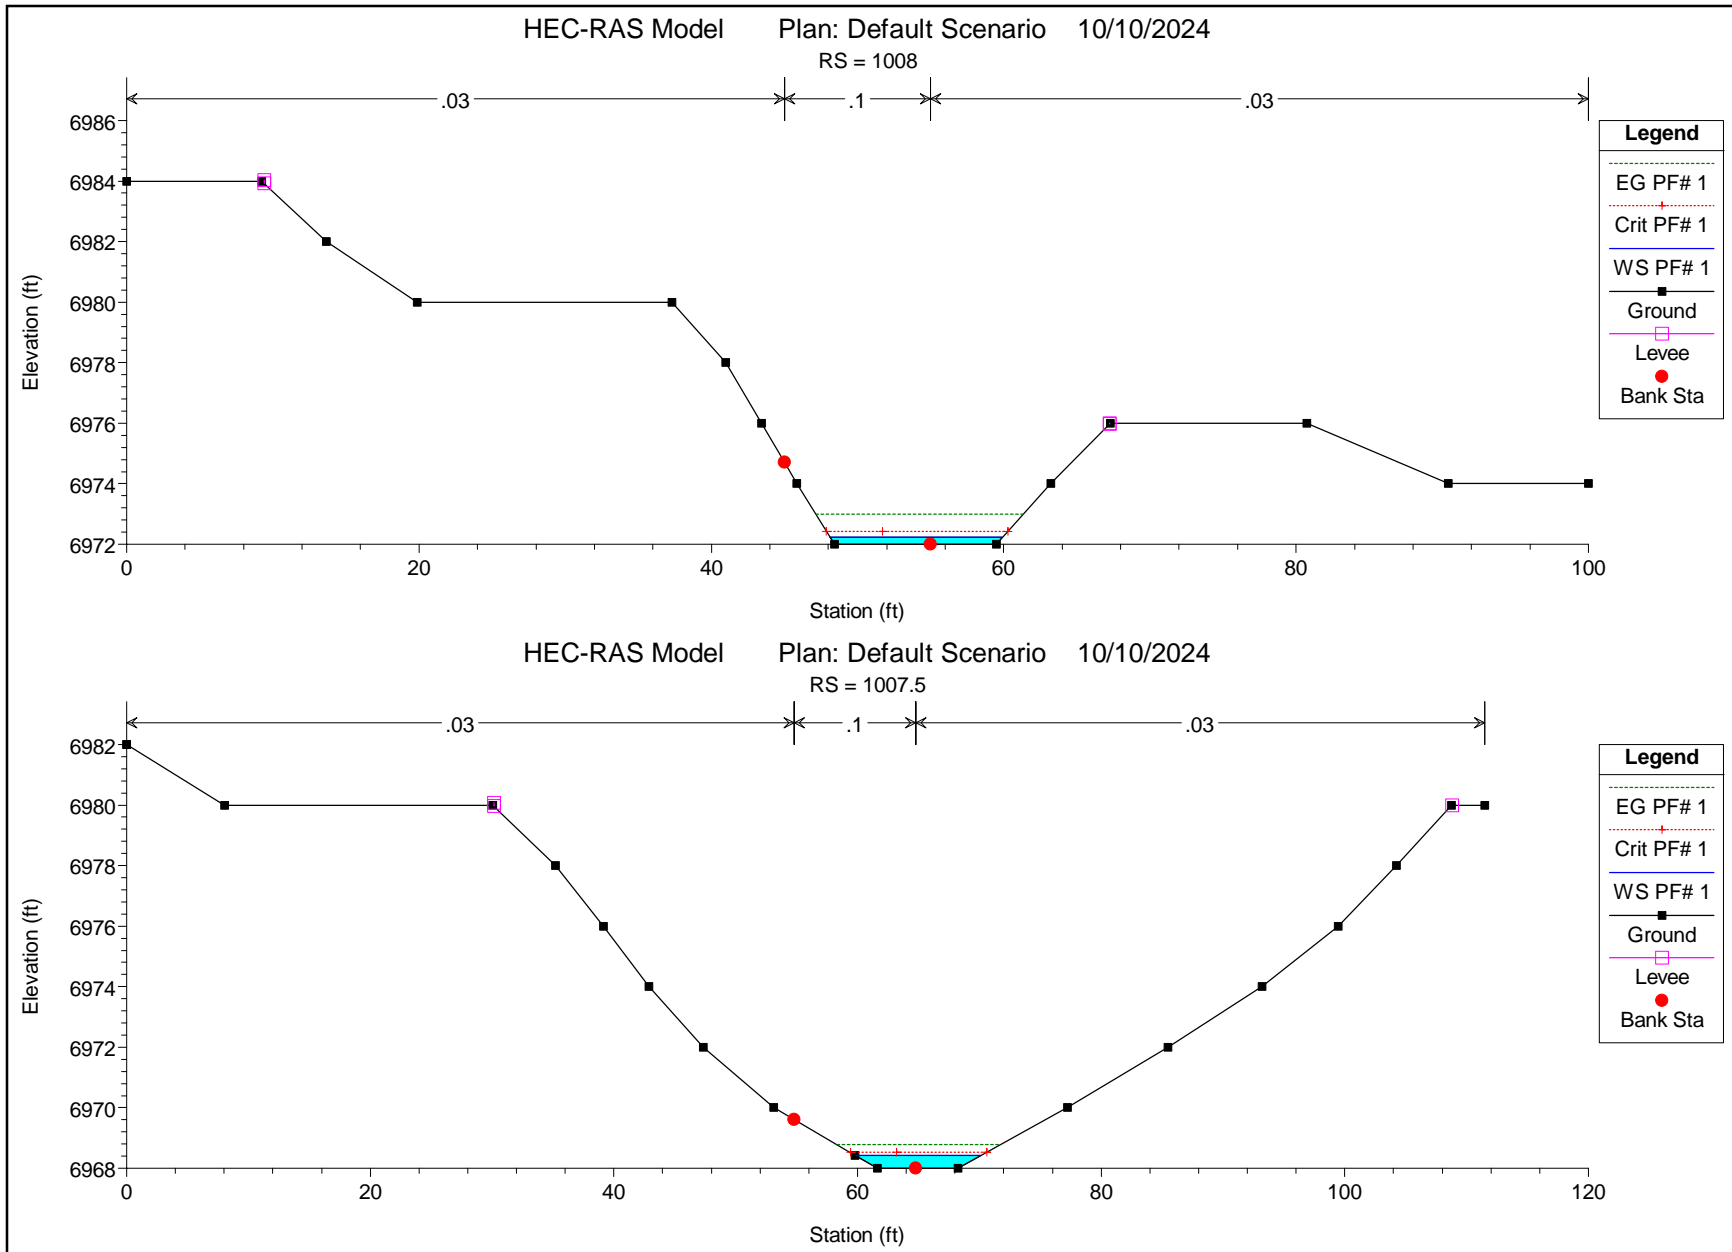

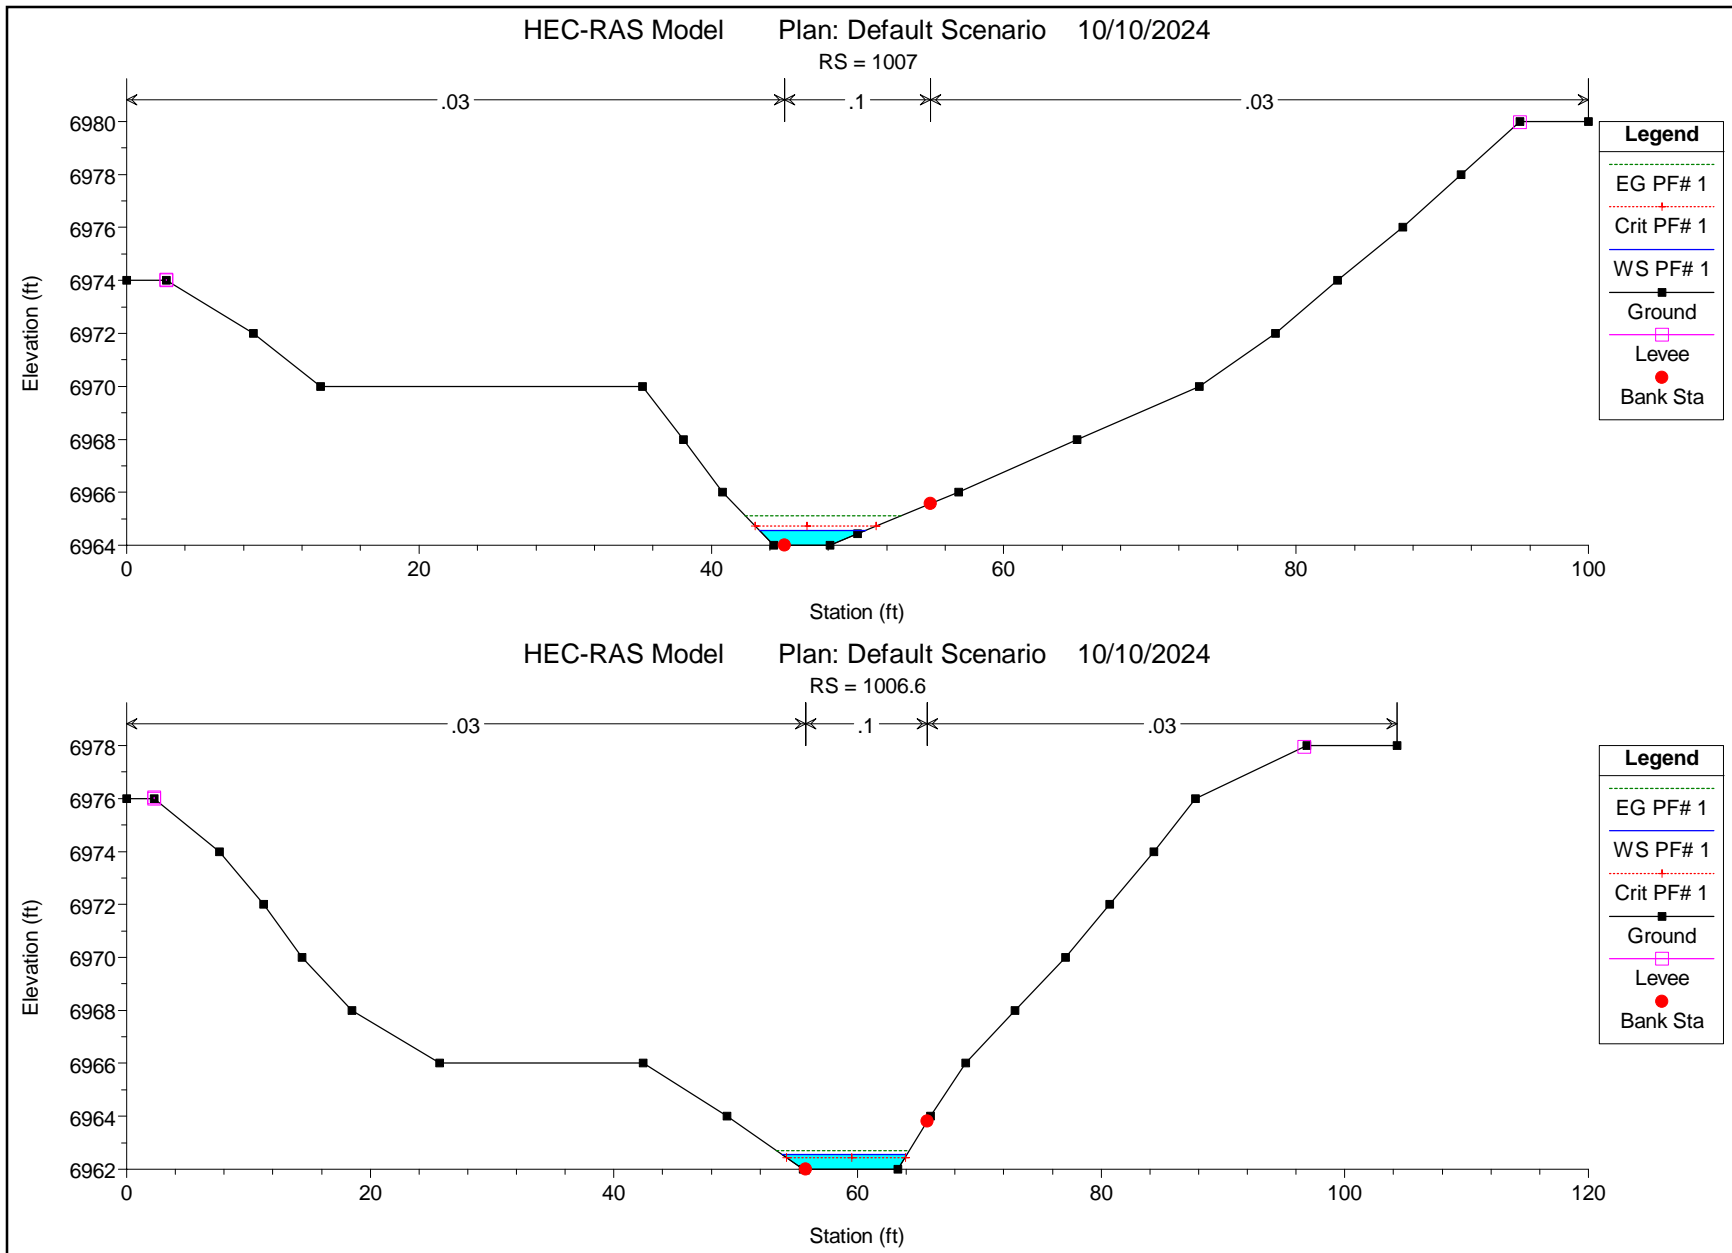


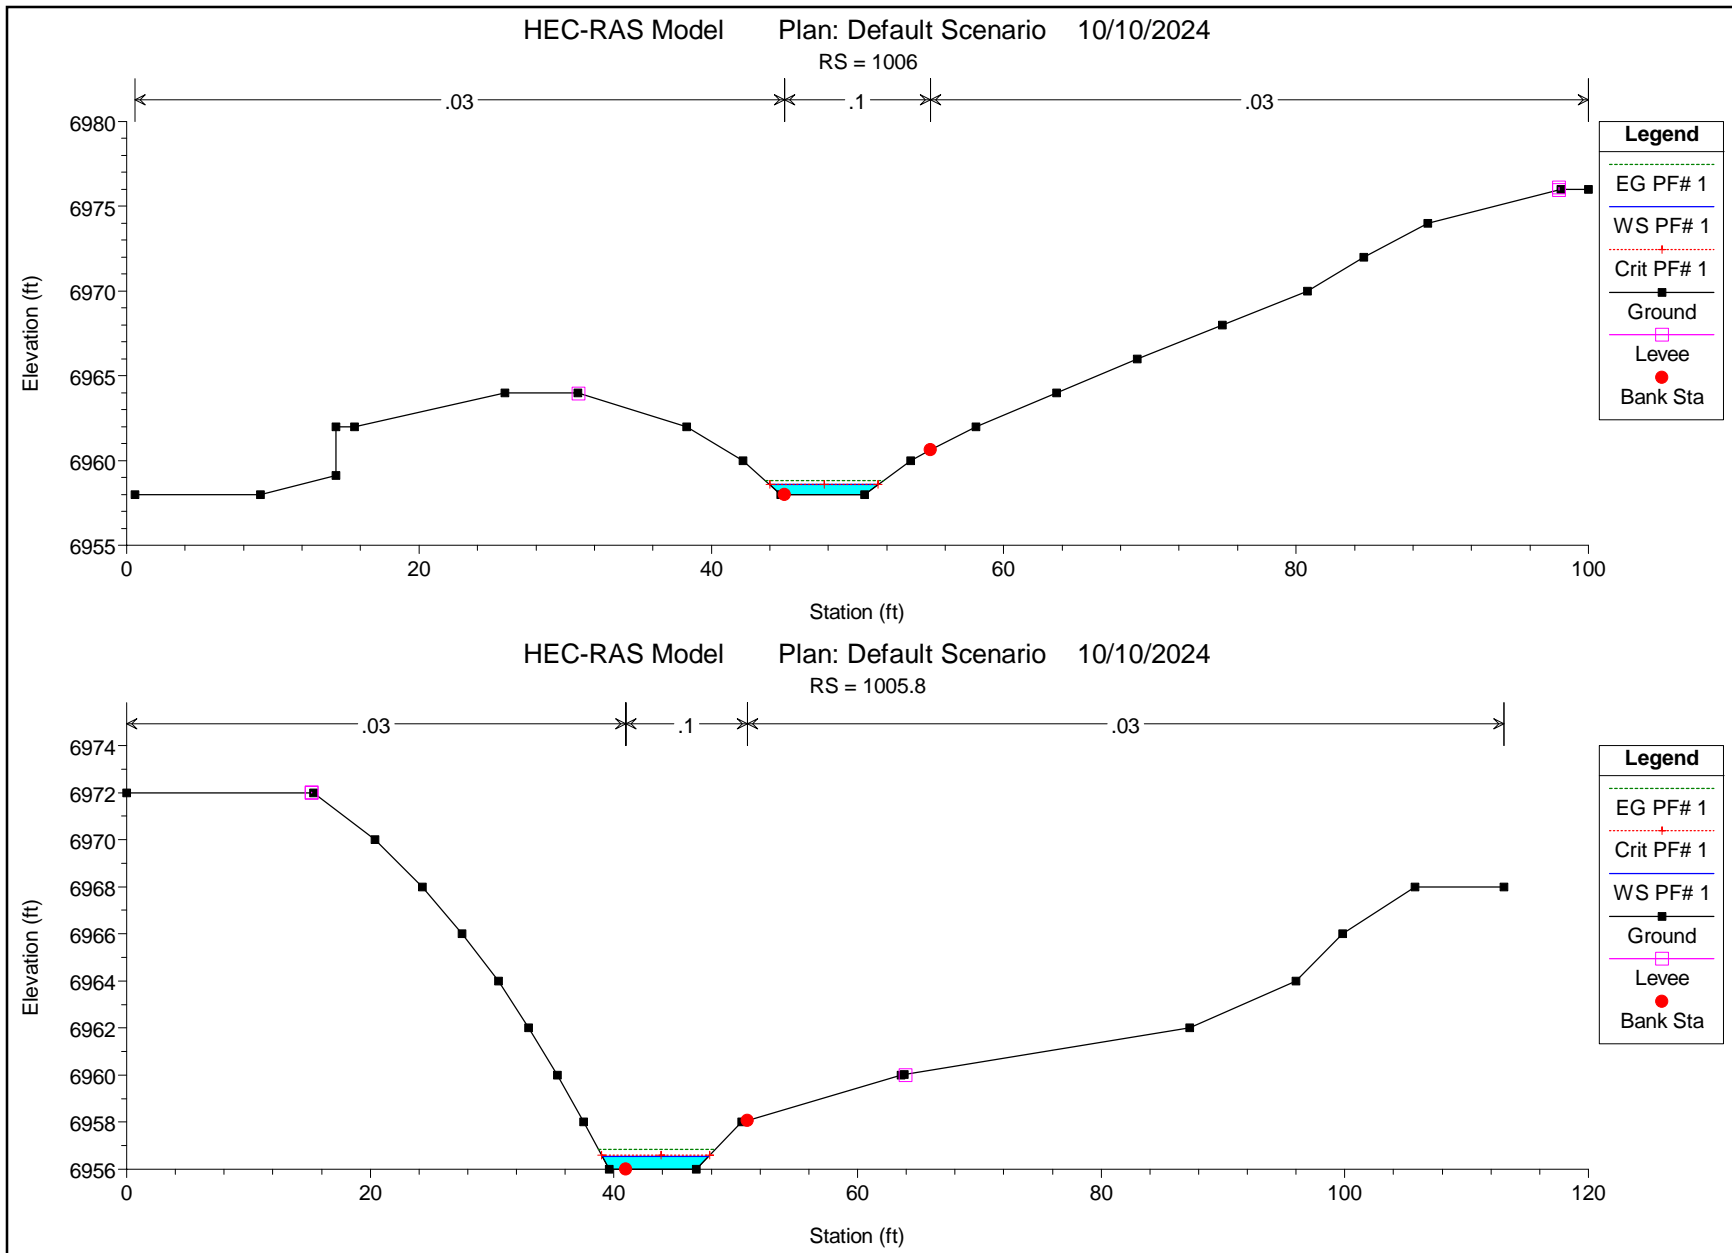


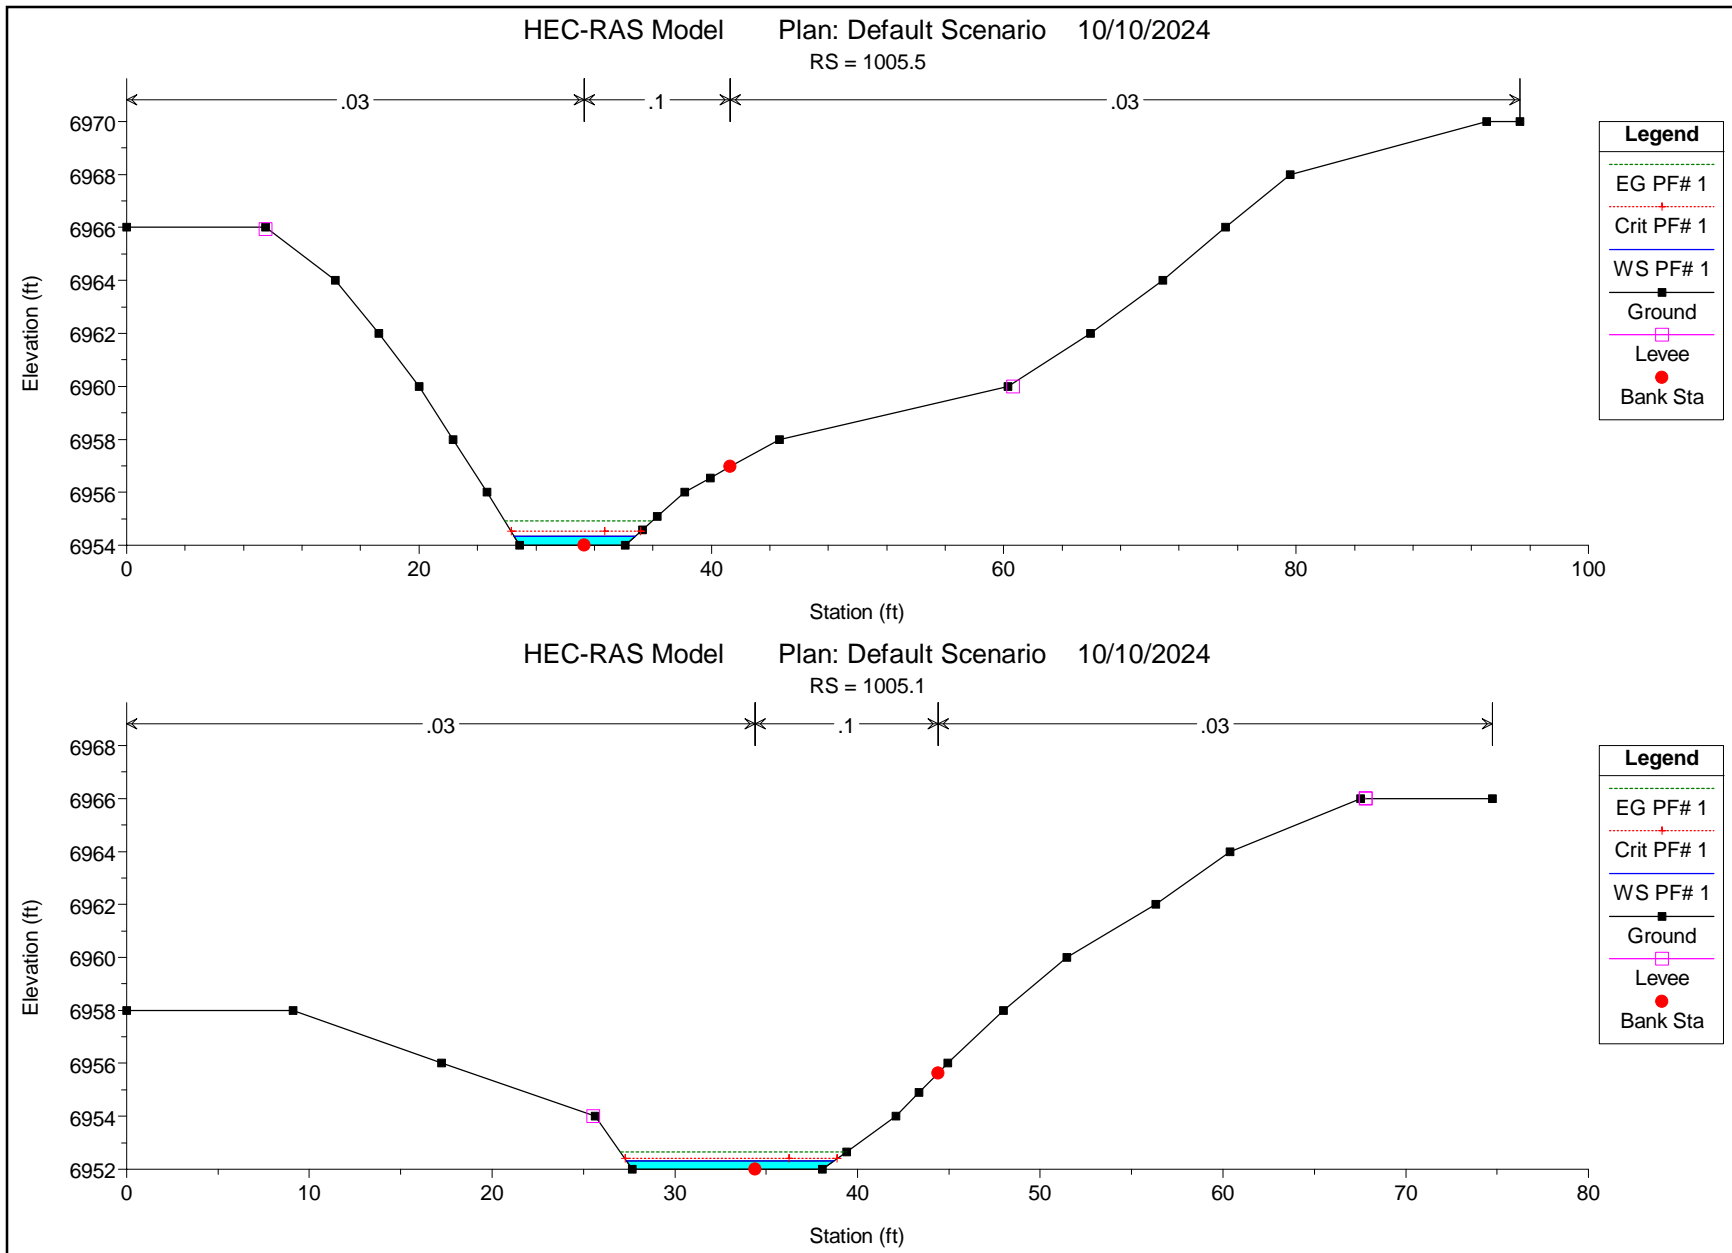


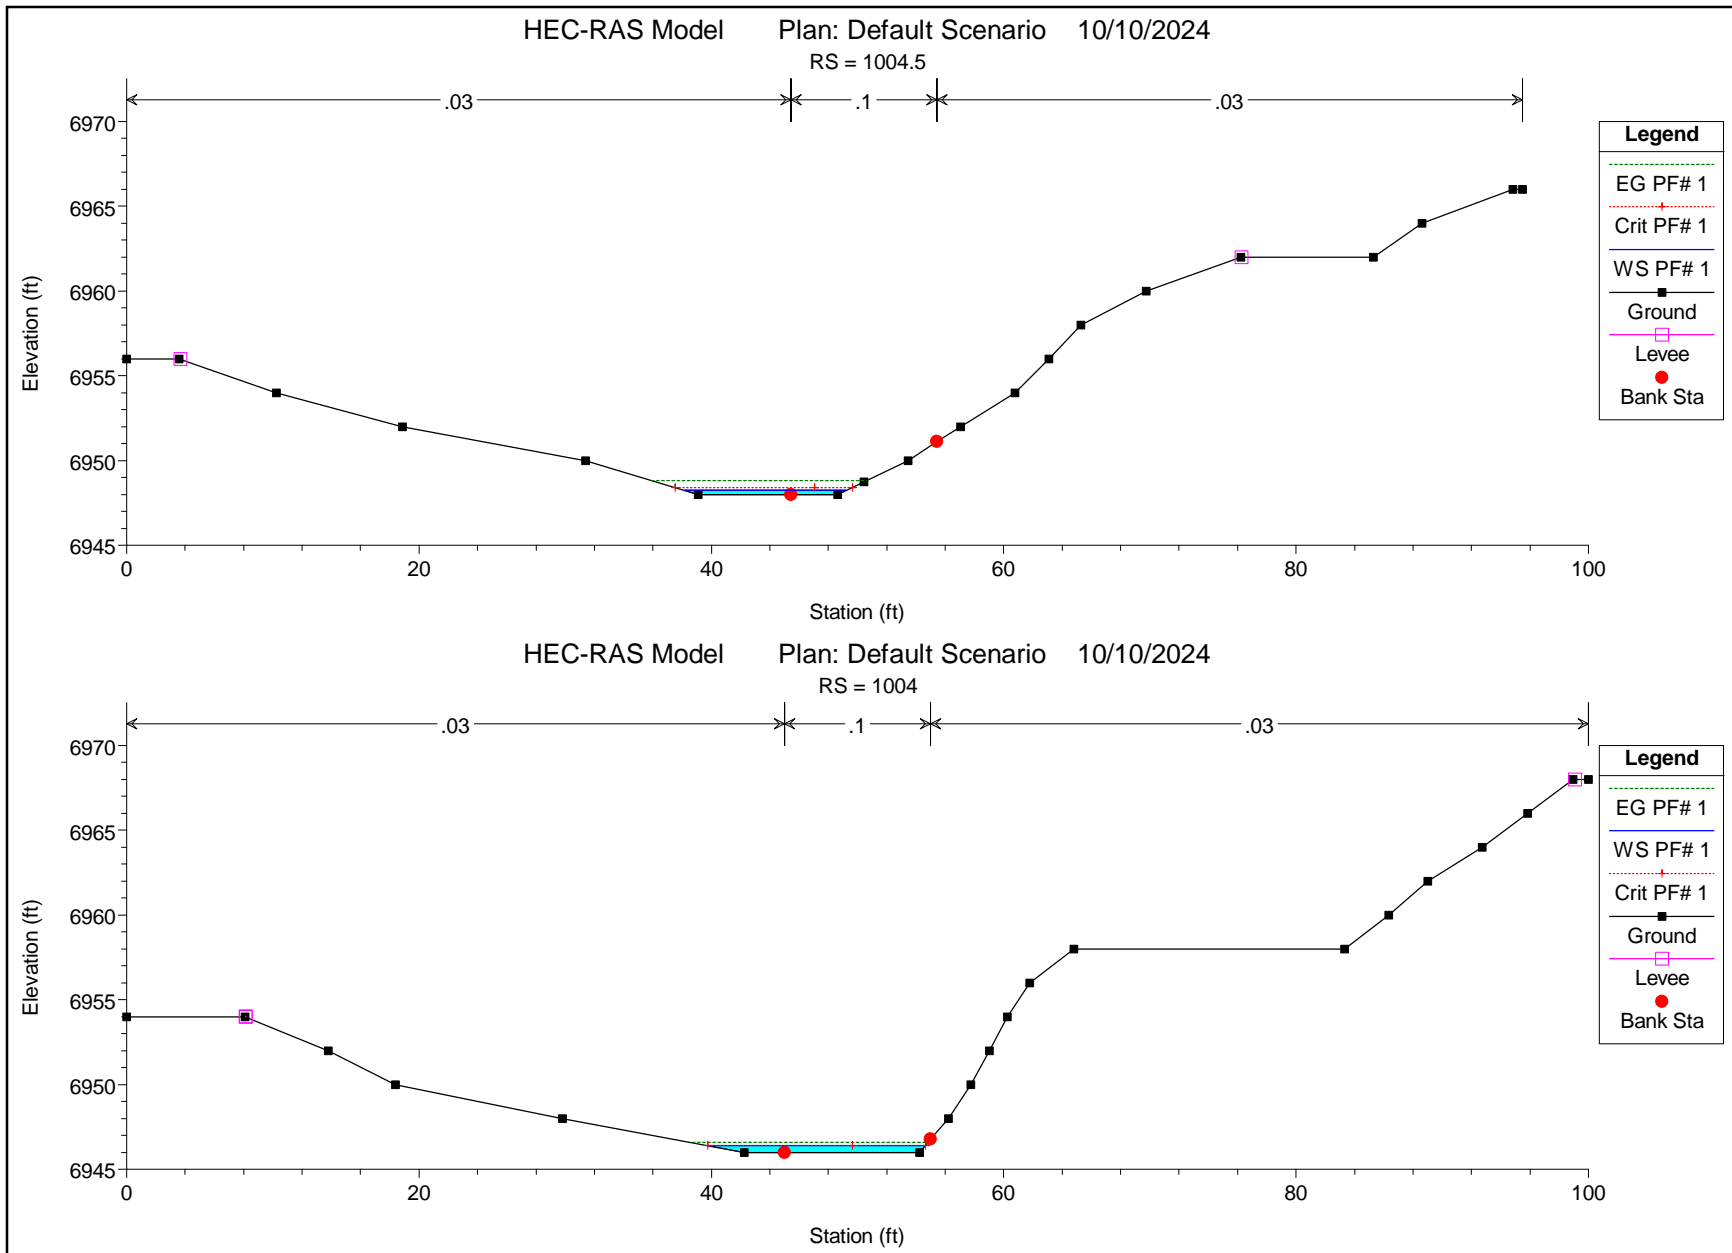




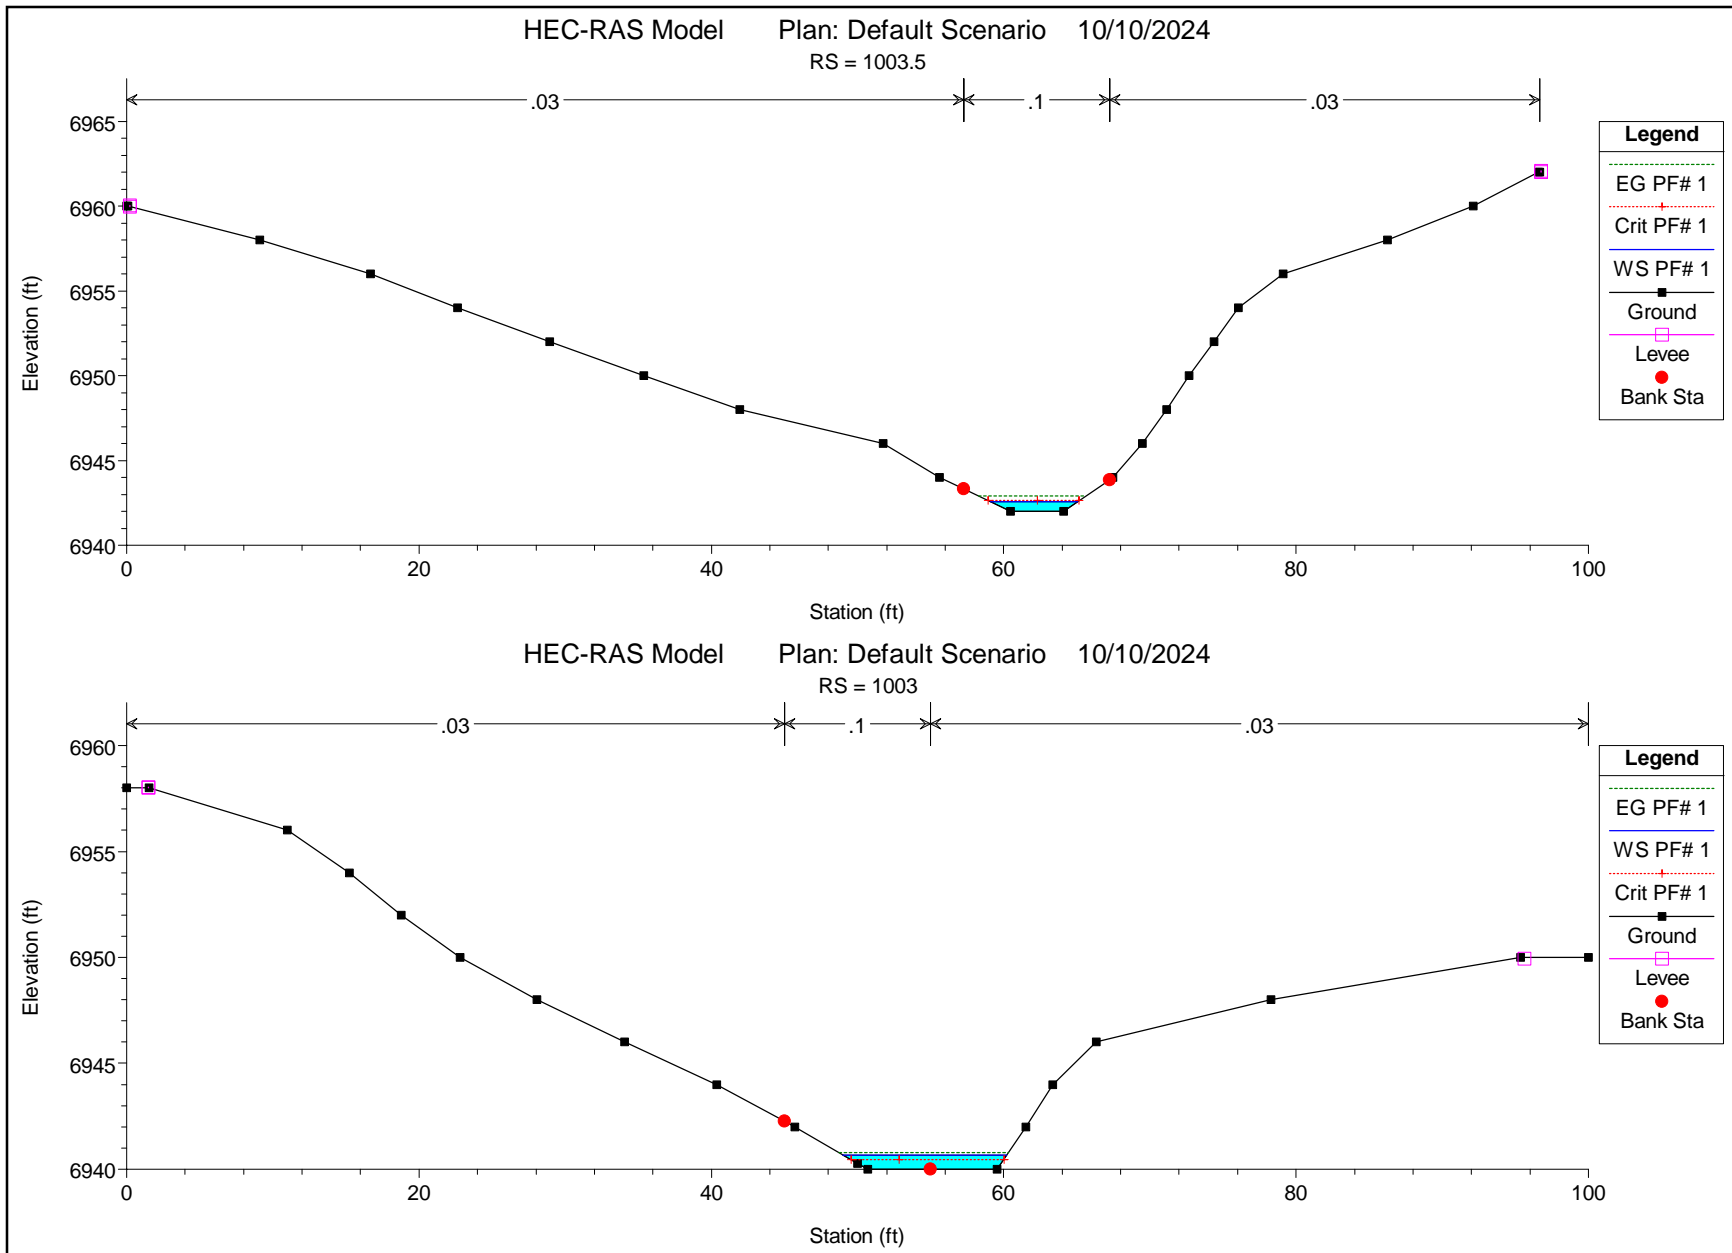


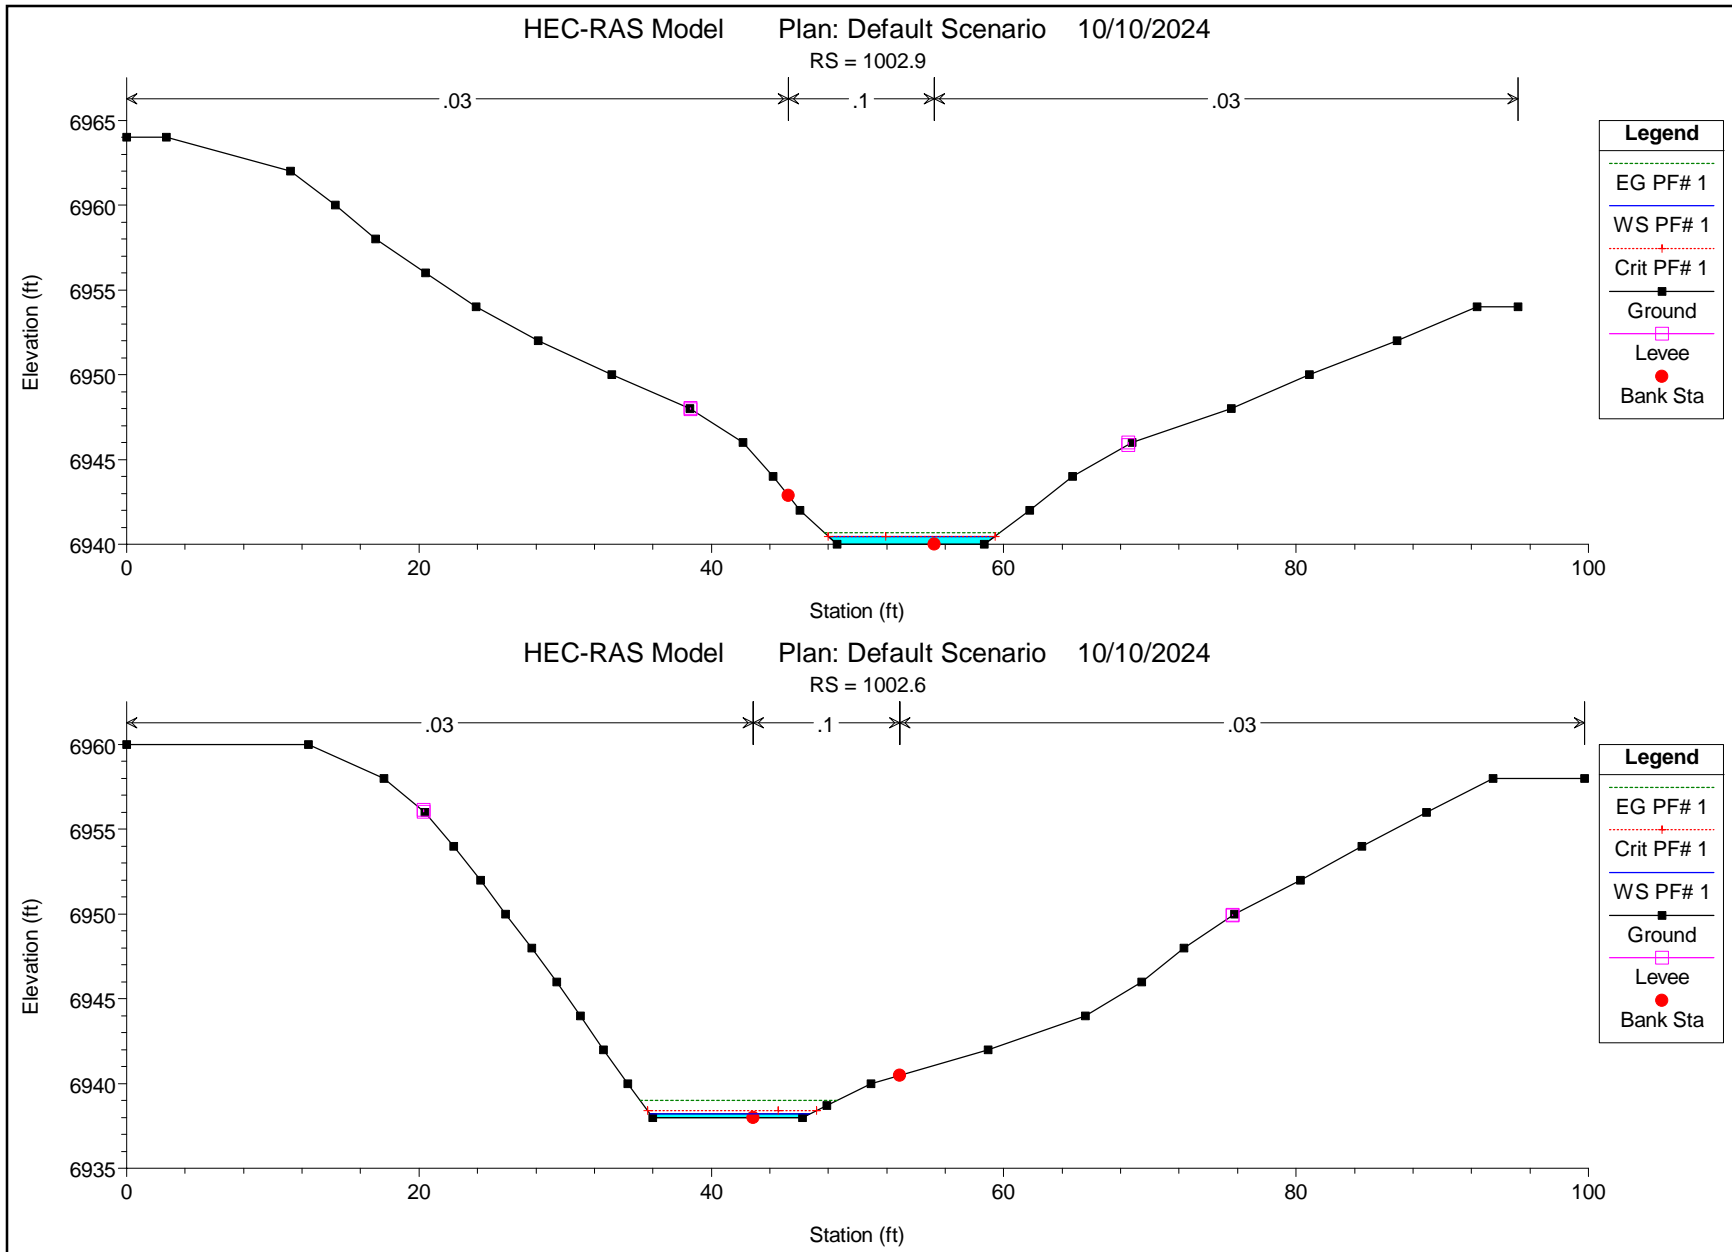

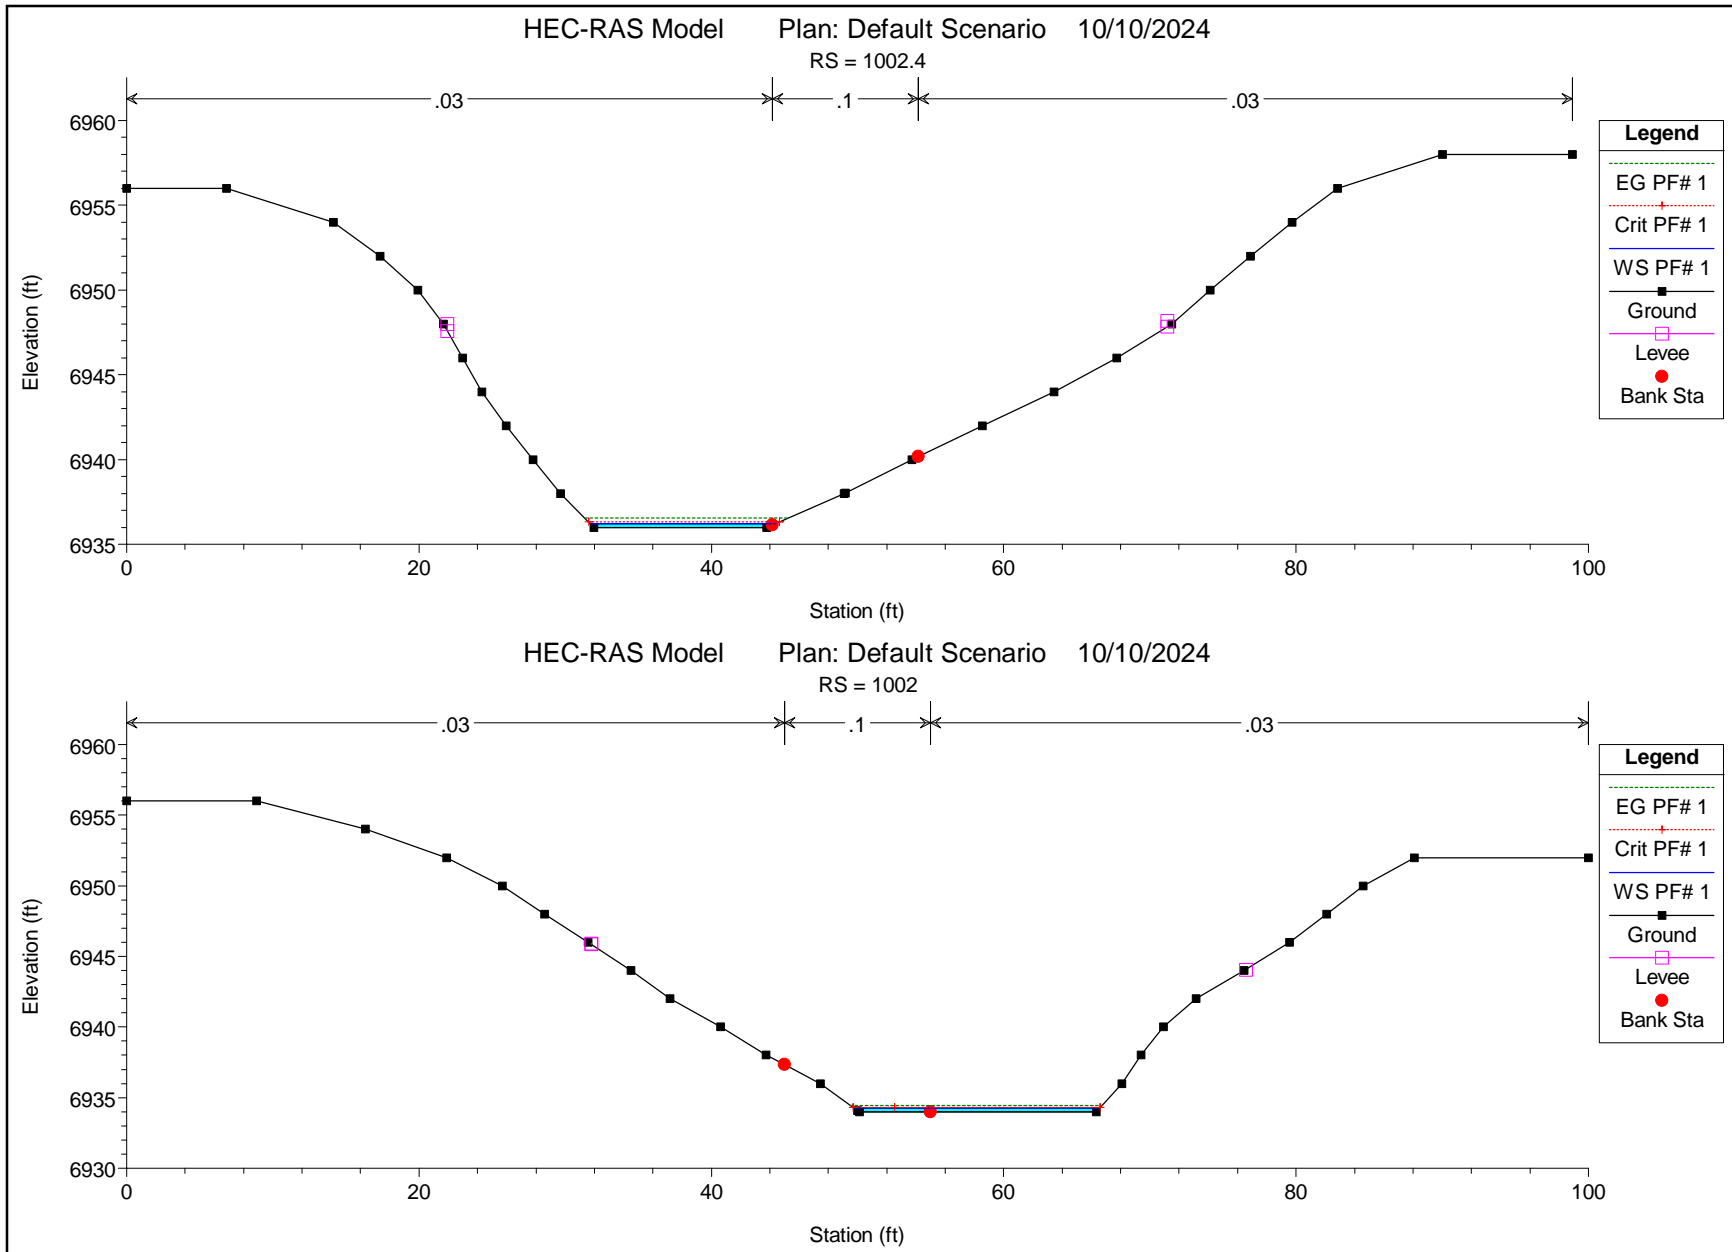



HEC-RAS Model Plan: Default Scenario 10/10/2024


RS = 1001.94

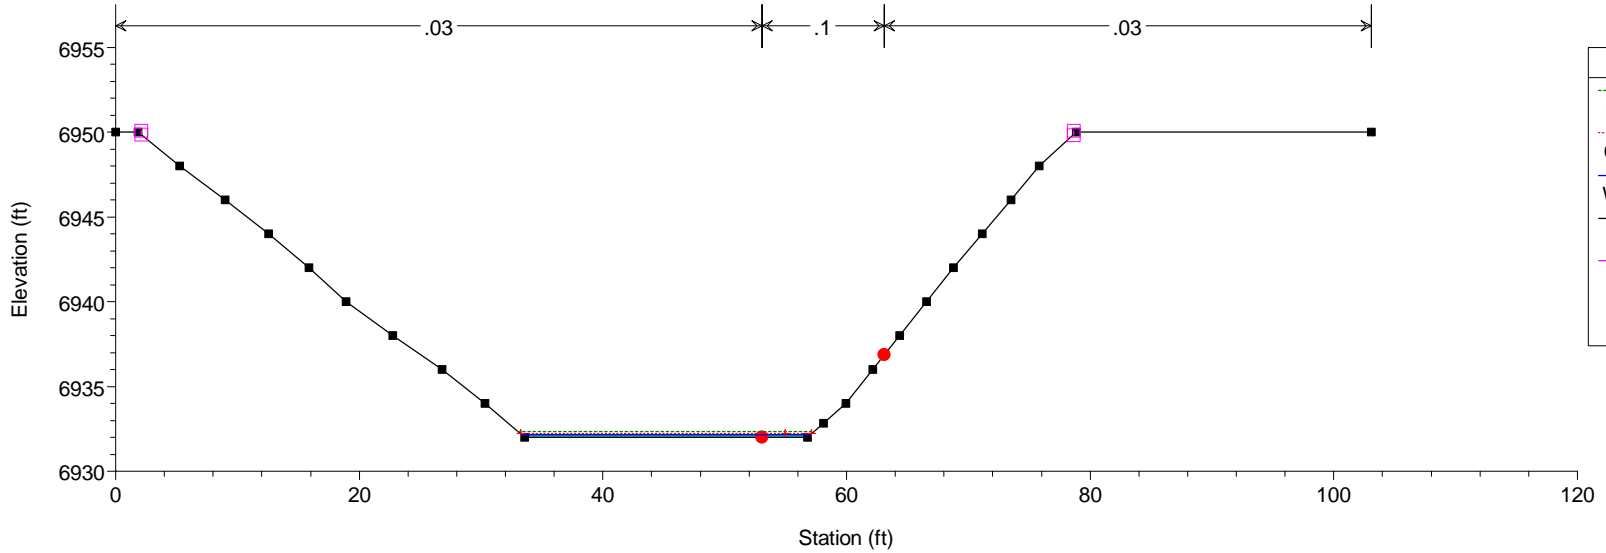


HEC-RAS Model Plan: Default Scenario 10/10/2024


RS = 1001.9

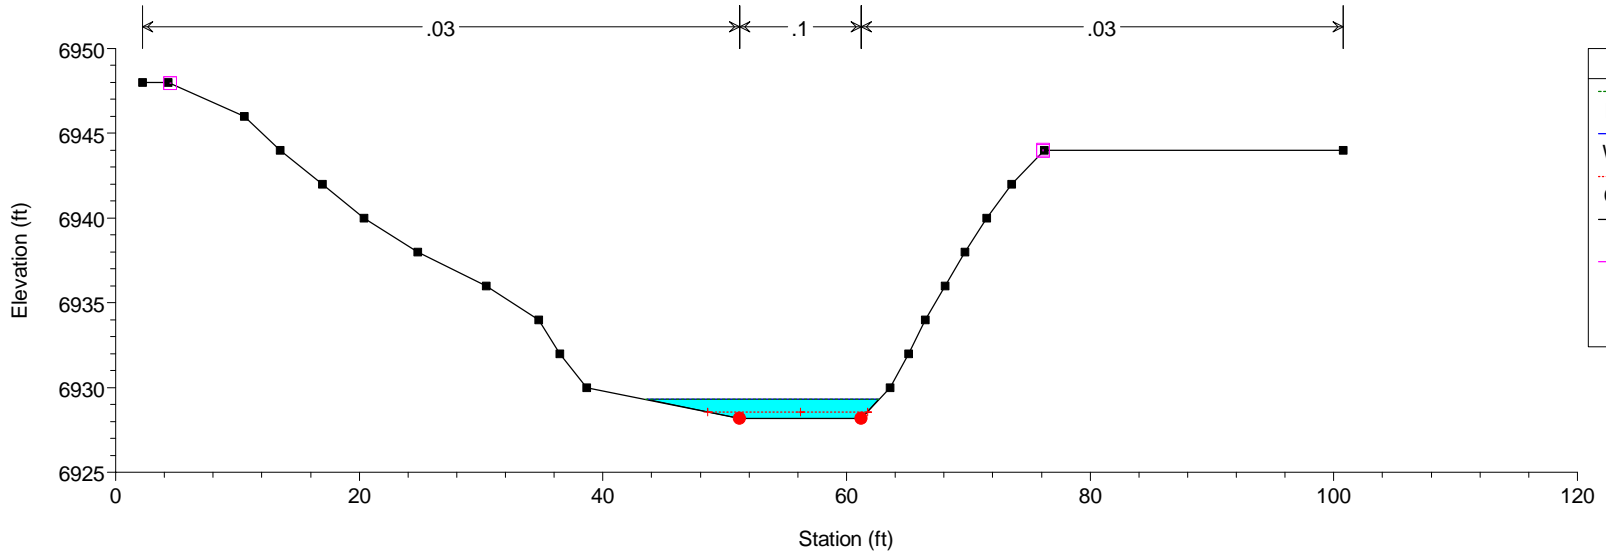

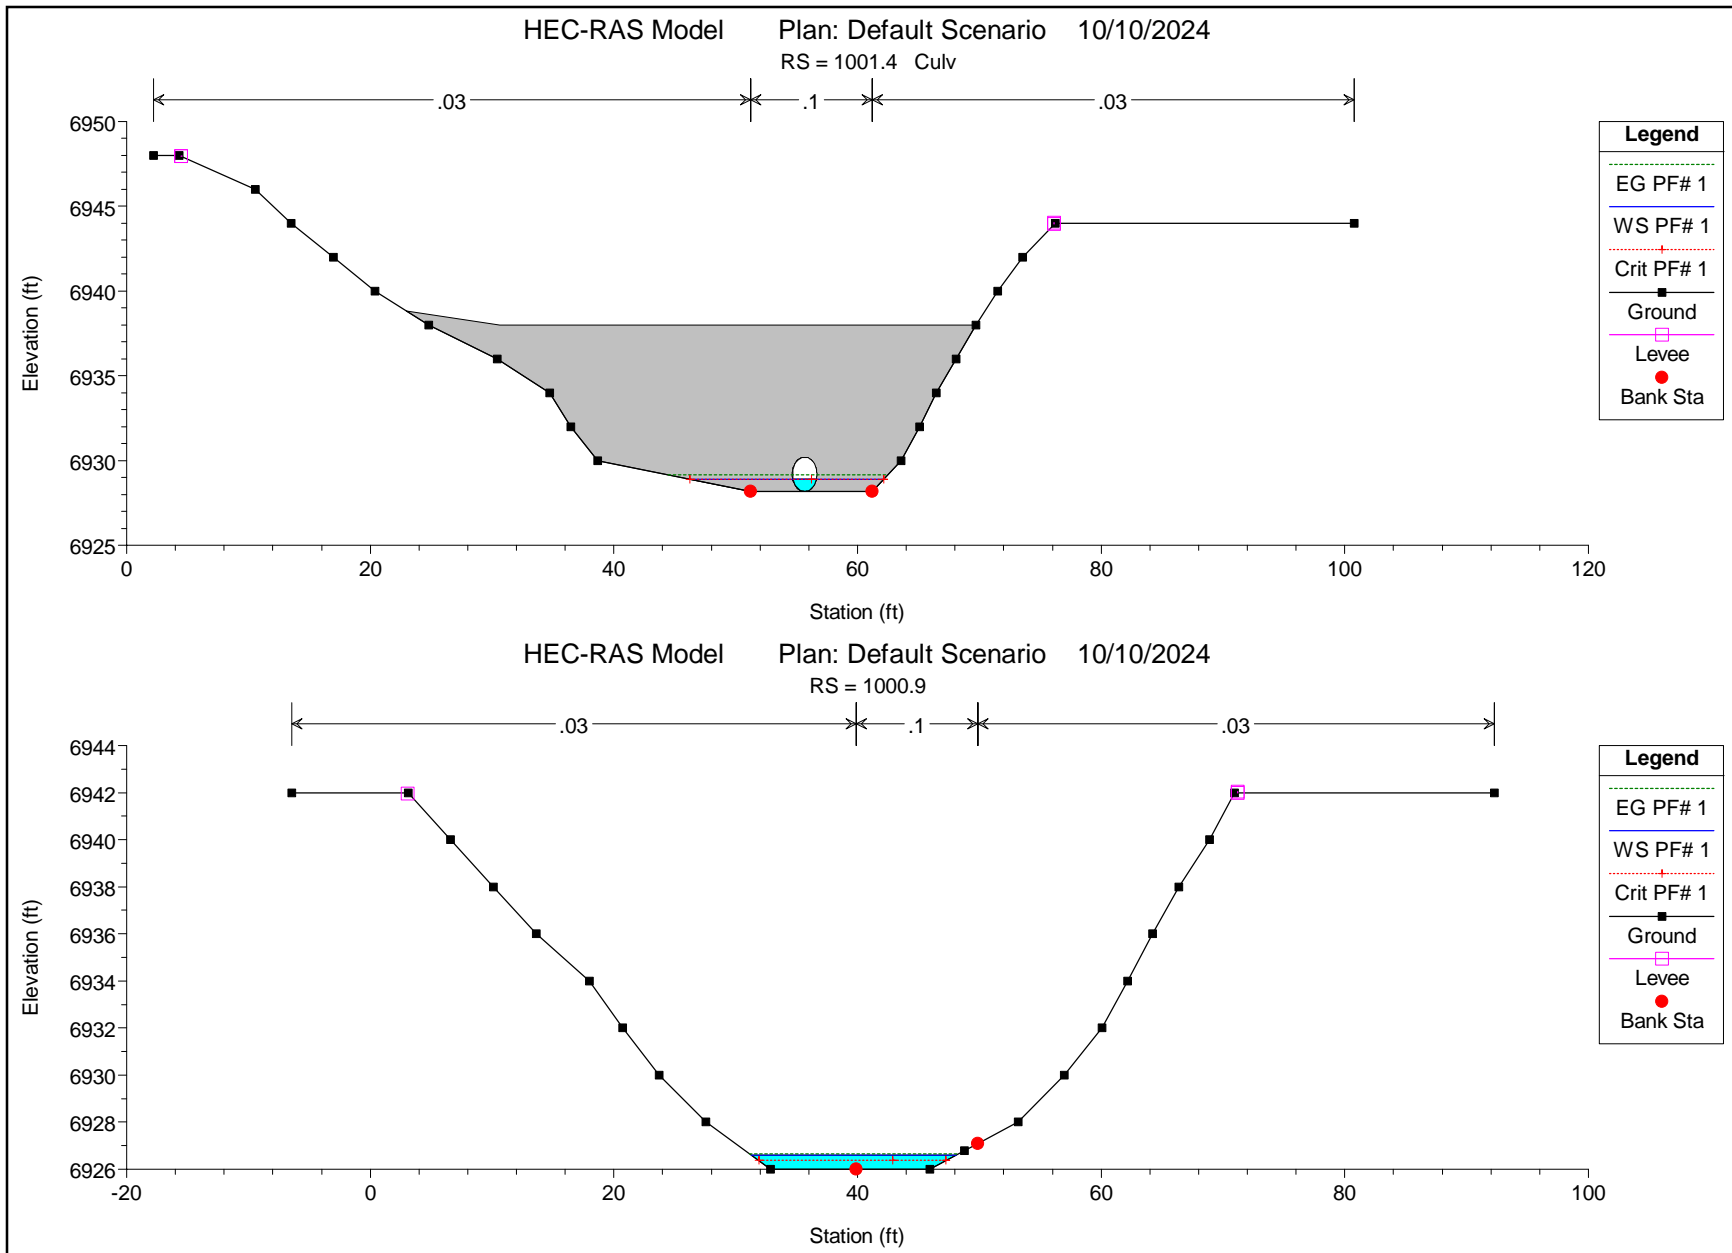

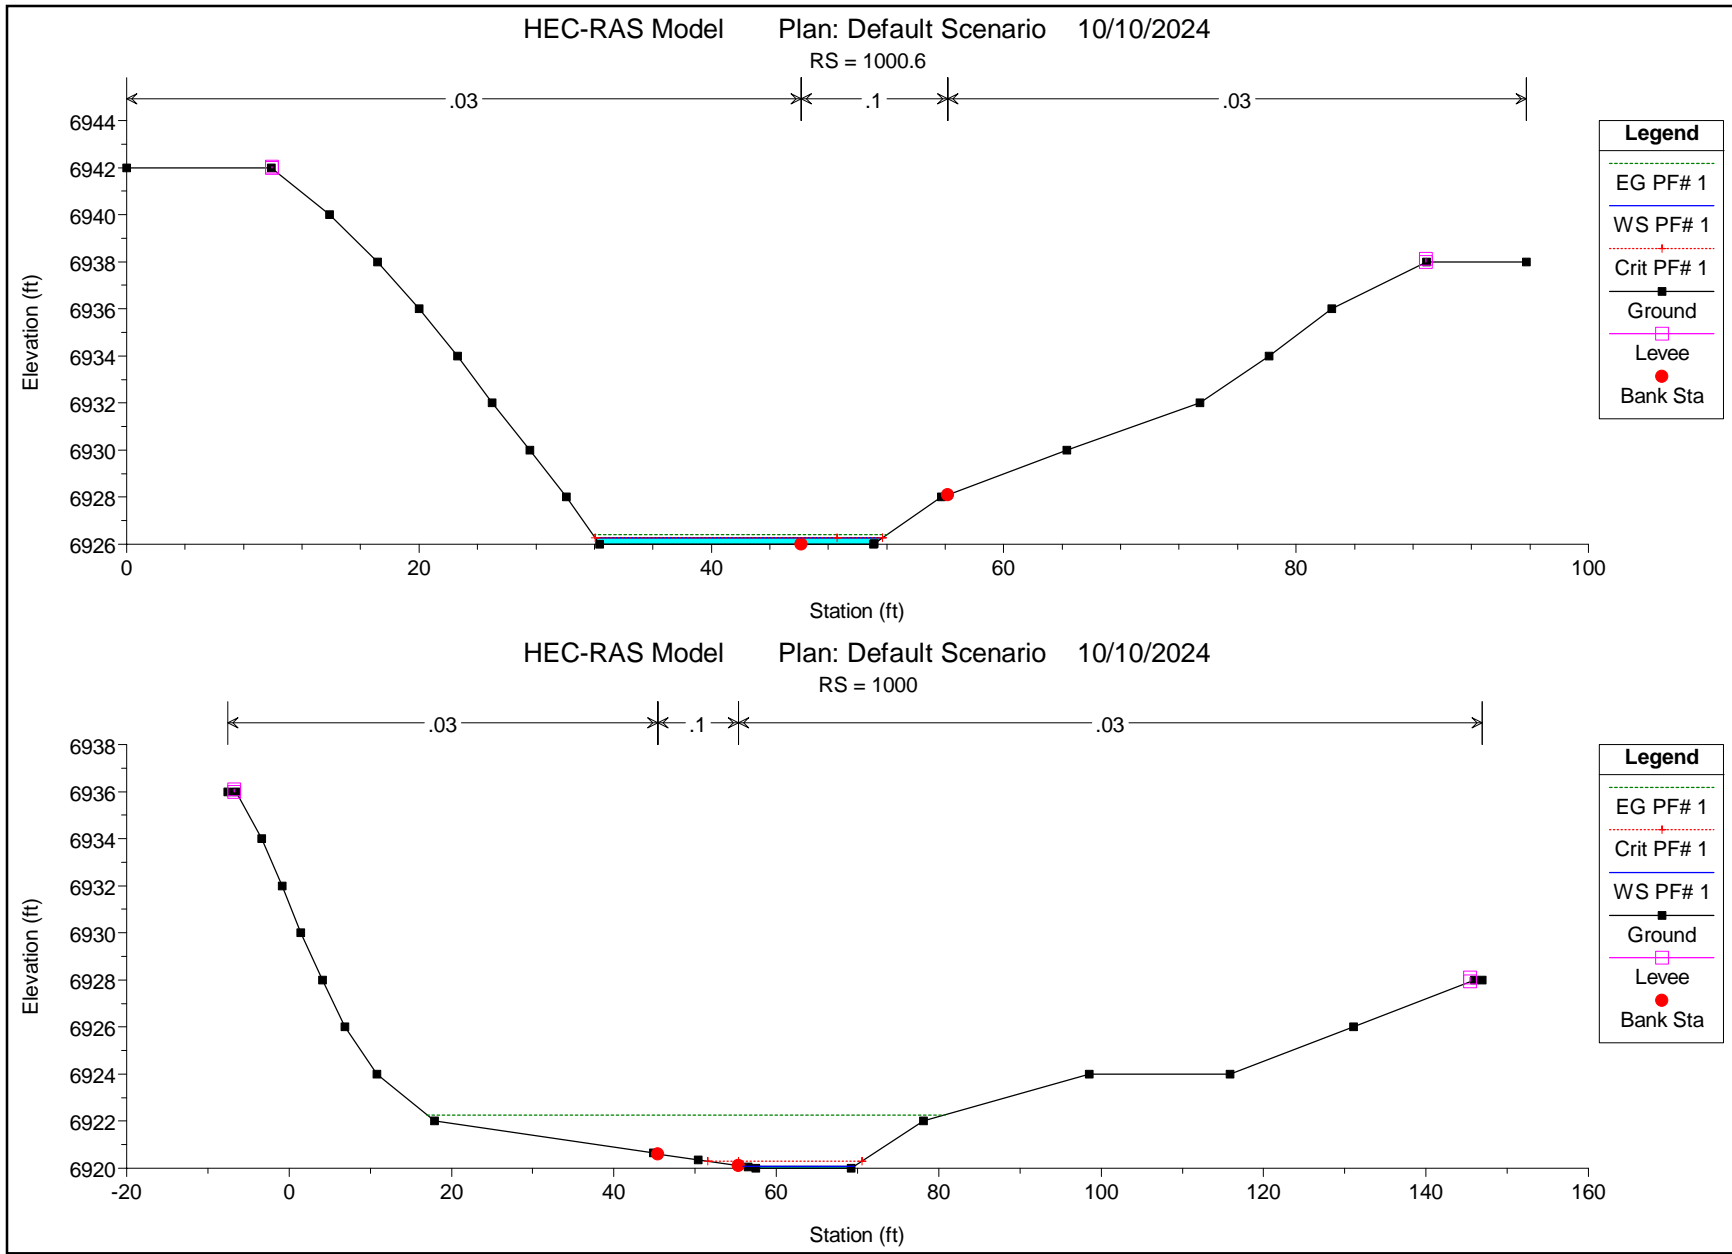

DrainagePath 2.2

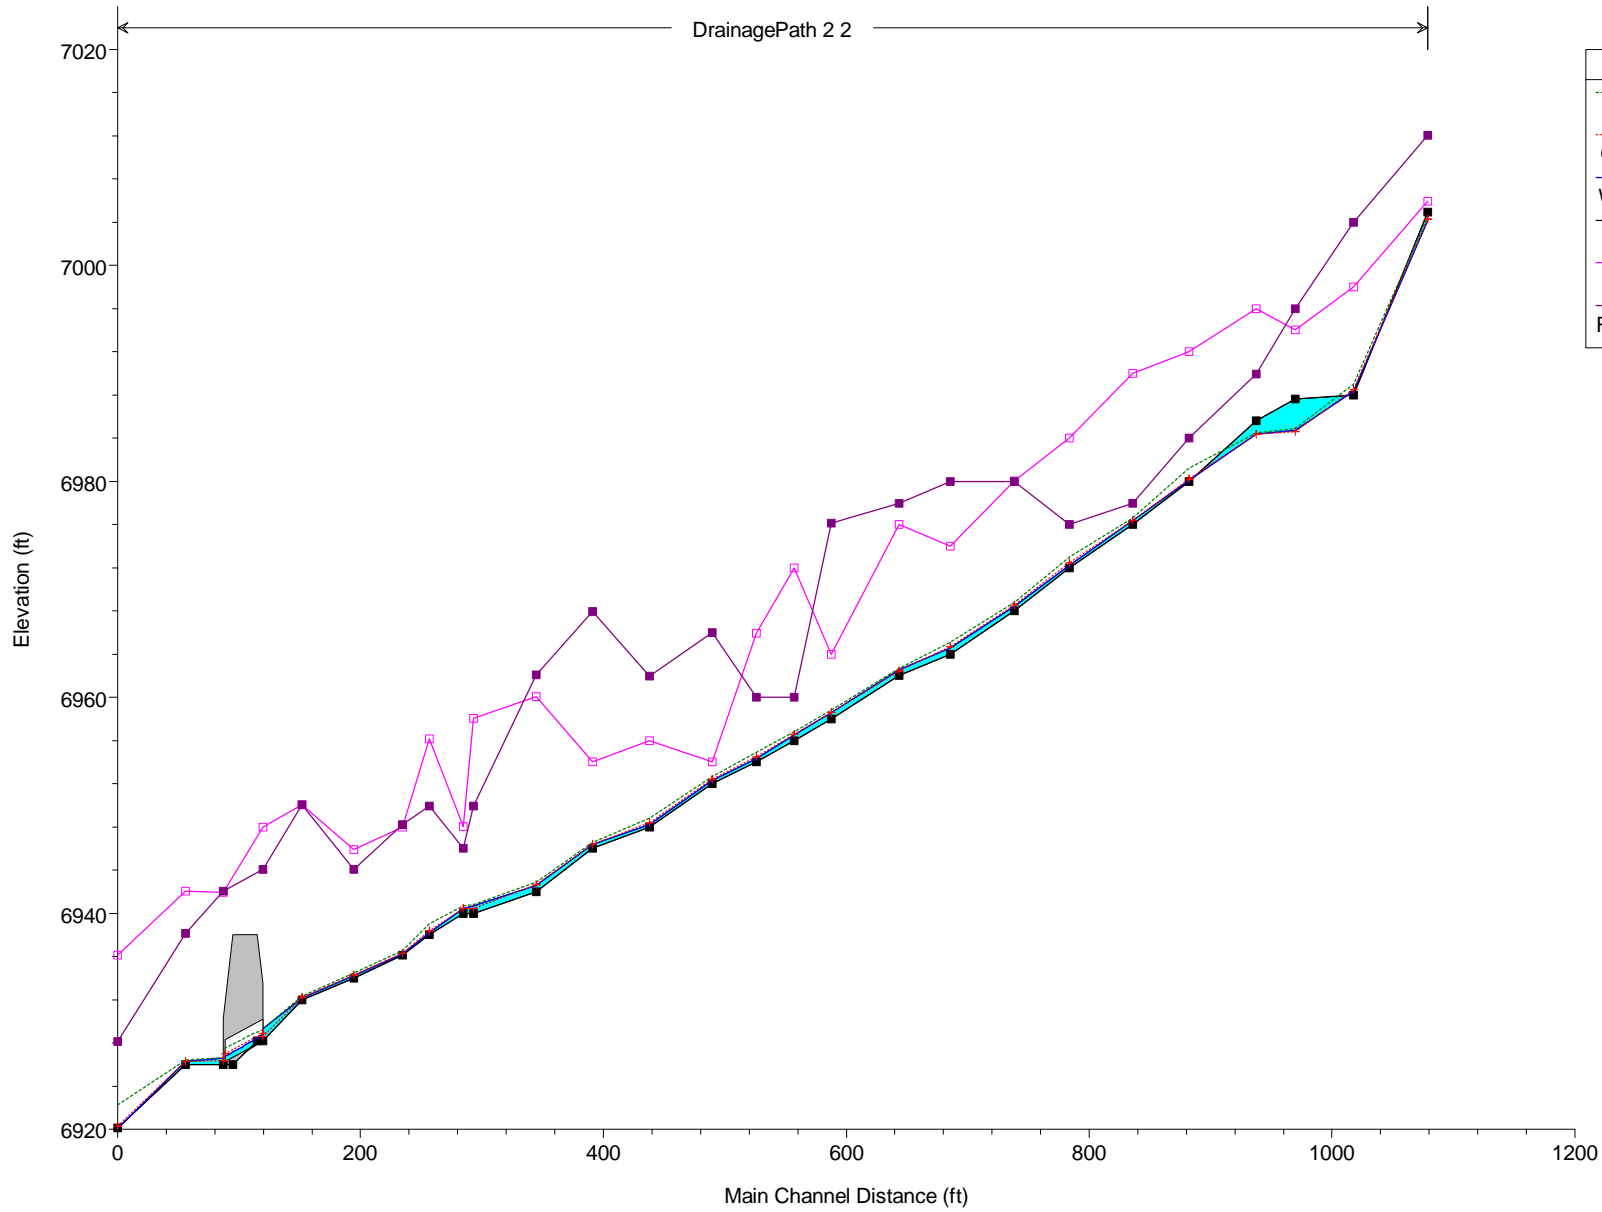

Legend	
EG PF# 1	Dotted green line with '+' markers
Crit PF# 1	Dotted red line with '+' markers
WS PF# 1	Solid blue line with '+' markers
Ground	Solid black line with '+' markers
Left Levee	Solid magenta line with open square markers
Right Levee	Solid purple line with solid square markers

## **Appendix D**

### **Reference Materials**



**Drainage Basin Planning Study  
For  
Kettle Creek Basin**

Prepared for:

High Valley Land Company, Inc.  
1755 Telestar Drive, Suite 211  
Colorado Springs, CO 80920  
Contact: Tom Taylor

Prepared by:

JR Engineering LLC  
3730 Sinton Road, Suite  
Colorado Springs, CO 80903  
(719) 593-2593  
Contact: Steve Rossoll

JR Project Number: 25100.00  
May 5, 2015

X:\2510000.all\2510000\Word\Reports\Kettle Creek DBPS

# 1 INTRODUCTION

## 1.1 Contract Authorization

This Drainage Basin Planning Study was authorized under the terms of an agreement between the City of Colorado Springs Engineering Development Review and Stormwater Departments and High Valley Land Company, Inc. and paid for with private funds. This study covers drainage development only within the Kettle Creek Drainage Basin.

## 1.2 Purpose and Scope

The purpose of the drainage basin planning study is to give an initial comprehensive study of the entire Kettle Creek Basin. This Study shall show the conduits, channels, natural drainage courses, detention reservoirs, easements, culverts and all other hydraulic facilities required to control surface water from the 100-year event within the Kettle Creek Basin and to carry such waters to points of insignificant impact and to develop a plan to address future stormwater and infrastructure needs within the Kettle Creek Watershed. The process used to develop a DBPS provides opportunity for interested parties to offer input on drainage issues, needs, and facilities within the watershed. The DBPS is intended to provide an inventory of required drainage facilities and determine a drainage fee per developed acre.

## 1.3 Past Studies

A complete Drainage Basin Planning Study (DBPS) has not been performed for the entire Kettle Creek Watershed. However, Master Development Drainage Plans (MDDP) and Final Drainage Reports (FDR) have been prepared for areas within the study area that have been developed in the last 13 years. A number of previous studies and reports were reviewed during the preparation of the current study. The most relevant studies are listed below along with a brief synopsis of the relevance of the current study. Additional reports that were reviewed are noted in the reference section of this study.

Fountain Creek Watershed Study, January 2009, U.S. Army Corps of Engineers.

The Fountain Creek Watershed Study ties together four separate studies, a hydrology report, a hydraulics report, and environmental conditions report, and a geomorphology report, into a watershed study establishing the objectives for reduced flood risk, erosion, and sedimentation in the Fountain Creek Basin. The Watershed Study presents percent change data for existing versus future peak discharges and volumes in Monument Creek and adjacent tributaries, although no Kettle Creek flow data is presented in the Watershed Study. The hydrologic study and hydraulic study were not available from the City of Colorado Springs or from the U.S. Army Corps of Engineers to compare hydrology for common basins at the time of the preparation of this DBPS.

Master Development Drainage Plan For North Fork at Briargate, May, 2014, by JR Engineering.

A proposed mixed use development comprised of a single family residential, multifamily, an elementary school, and park site. The Site covers 267 acres located north-east of Powers Boulevard and Old Ranch Road.

Kettle Creek Drainage Basin Old Ranch Road Tributary Drainage Basin Planning Study and Master Development Drainage Plan, April 2001, by JR Engineering. (Kettle Creek MDDP/DBPS)

This MDDP/DBPS covers the portion of the Kettle Creek Basin along old Ranch Road. This study provides hydrologic data for the existing and future development along Old Ranch Road, Creekside Estates, and drainage facilities at Pine Creek High School.

U.S. Air Force Academy Kettle Creek Watershed Hydrology Study Findings and Recommendations Report, March 2002, by URS Group, Inc. (AFA Study)

This report was prepared for the U.S. Air Force Academy to study the hydrologic, hydraulic, and sediment transport for the entire Kettle Creek basin. The report recommends alternatives to reduce sediment accumulation, evaluate Preble's meadow jumping mouse habitat, and enhance existing wetlands on Academy property.

Flood Insurance Study for El Paso County and Incorporated Areas

FEMA performed a Flood Insurance Study (FIS) in 1999 with detailed analysis and base flood elevations from State Highway 83 to Templeton Gap Road at the headwaters of Kettle Creek in the Black Forest. The FEMA FIRM maps and FIS data are included in **Appendix B**.

## 1.4 Stakeholder Process

Stakeholders who may be affected by this study results must be identified and included in numerous public meetings and presentations to committees, council and commissions. This DBPS is prepared for the High Valley Land Company, Inc. and is the only stakeholder that is affected in the Kettle Creek Basin study. Thus there are no stakeholder meetings and presentations required.

## 1.5 Agency Jurisdictions

Future development in the Kettle Creek basin will predominately be located within the City of Colorado Springs city limits. Improvements outside the city limits will be located and governed by El Paso County.

## 1.6 General Basin Description

The Kettle Creek watershed is located in the north central portion of El Paso County, Colorado. Kettle Creek and its tributaries originate on the southern slope of the Black Forest and flow in a southwesterly direction towards the City of Colorado Springs. The Kettle Creek watershed has a contributing area of approximately 16.41 square miles at its junction with Interstate Highway 25 (I-25).

The headwaters of Kettle Creek are located in the Black Forest, an area dominated by ponderosa pine forest and grassland on undeveloped large acreage tracts and 2- to 5-acre rural residential lots. In the vicinity of Powers Boulevard, the watershed changes to predominately undeveloped grassland. Downstream of Powers Boulevard, the watershed is dominated by residential development consisting of single-family homes, commercial centers, and vacant land. A vicinity map is provided in **Figure 1-1**.

## 4 HYDRAULIC ANALYSIS

### 4.1 Major Drainageways

A hydraulic analysis was undertaken to evaluate the distribution of flow, determine areas covered by water during flooding events, and related characteristics of the water flow in the channel and overbank areas along Kettle Creek. While the hydrologic computations define the rate of flow for floods of selected frequencies at various points within the drainage basin, the hydraulic computations reflect dynamic conditions of the water flowing downstream as affected by the channel size, subsurface roughness, structures along the channel, channel vegetation, and similar physical characteristics. The physical characteristics of Kettle Creek and its tributaries in combination with the peak flood discharge rates described in Section 3 of this report provide the primary input characteristics to the hydraulic analysis, and the basis for evaluating the hydraulic adequacy of the outfall system.

Kettle Creek and its tributaries in the Black Forest area are defined in many places by deep channels with steep side slopes. A field investigation was conducted throughout the lower portion of the drainage basin, which will be the segment primarily affected by future development. It is understood that little future development is expected to occur in the Black Forest.

A field investigation was conducted from Powers Boulevard to I-25 in August 2014. The site investigation established a basis to define any areas in need of improvements, and determine the adequacy of the assumed channel characteristics and existing structures in this area. The visit also identified some areas where stream bank and bed erosion exists in the lower portion of the basin, and where other physical problems have resulted due to the stream hydraulics. Some of these areas are presented in **Appendix D** with photos taken in August 2014.

### 4.2 Methodology

Hydraulic calculations were performed on Kettle Creek to determine the existing and future floodplain limits. This was accomplished by utilizing the U.S. Army Corps of Engineer's HEC-RAS River Analysis System program (version 4.1.0, January 2010). For this study, Kettle Creek was divided into separate reaches corresponding to the designations as shown on **Figure 3-2**, and described in Section 3 of this report. The delineated historic, existing and future floodplain boundaries can be seen on the work maps, **Figures 4-1** and **4-2**, and the depths are depicted on the profile sheets included as **Figure 4-3** through **Figure 4-7**.

#### 4.2.1 Parameters

Hydraulic analyses for existing and future hydrologic conditions were completed for the main stem of Kettle Creek from Howells Road to I-25. These analyses were completed to represent peak flows for the flood events with 2-, 5-, 10-, 25-, 50- and 100-year recurrence intervals. Cross-section topography data was obtained from a triangulated irregular network (TIN) in AutoCAD that was created from the contour information obtained from City of Colorado Springs FIMS topographic data.

#### 4.2.2 Structures

Bridges and ineffective flow areas were added to the HEC-RAS model. Physical parameters for measured structures were incorporated into the hydraulic model using HEC-RAS bridge and cross-section data editors. All of the drainageway crossings from Powers Boulevard to I-25 were modeled to represent existing conditions which consist of bridges over Kettle Creek. These crossings are located at Powers Boulevard (bridge), Old Ranch Road (bridge), Otero Avenue (bridge), and Voyager Parkway (State Highway 83) (bridge).

#### 4.2.3 Reaches

The reach analyzed consists of the Kettle Creek main stem from Howells Road (approximate, Howells Road does not cross Kettle Creek) to the Kettle Creek Detention Facility just east of I-25, approximately 24,850 linear feet or 4.7 miles of channel. This downstream limit extends 3,000 feet past the FIS and FEMA FIRM maps. The upstream limit of model was taken to be the approximate limit of significant planned future development at the east city limits. Upstream of Howells Road is the Black Forest (El Paso County jurisdiction), where land use is expected to remain unchanged in the future. The downstream limit was taken to be the embankment of the regional detention pond at I-25. Information from the U.S. Air Force Academy Kettle Creek Watershed Hydrology Study (April 2002) was used to determine the water surface elevations of the Kettle Creek detention facility for each respective storm recurrence interval.

The main stem of Kettle Creek in the subject reach is defined by a deeply incised main channel with heavy brush and wetland-type vegetation. Above the banks of the main channel, overbanks exist within the Kettle Creek drainageway with steep side slopes and natural grasses and sparse scrub vegetation.

#### 4.2.4 Manning's *n* Values

The Manning's *n* values were applied across the channel cross-section to reflect changes in vegetative cover between the main channel and overbank areas. Manning's *n* values were obtained from the Major Drainage chapter of the UDFCD Drainage Criteria Manual. The Manning's *n* values for the channels and floodplains are summarized in Table 4-1.

Parameter	Historic Conditions	Existing Conditions	Future Conditions
Main Channel <i>n</i>	0.100	0.100	0.100
Overbank <i>n</i>	0.030	0.030	0.030

The Manning's *n* for the main channel was selected for "very weedy reaches, deep pools, or floodways with heavy stand of timber and underbrush". Manning's *n* values for the overbank areas reflect conditions of













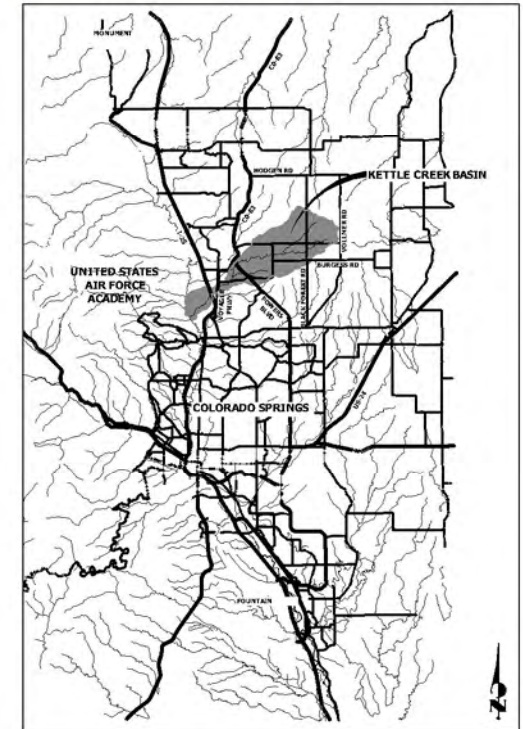
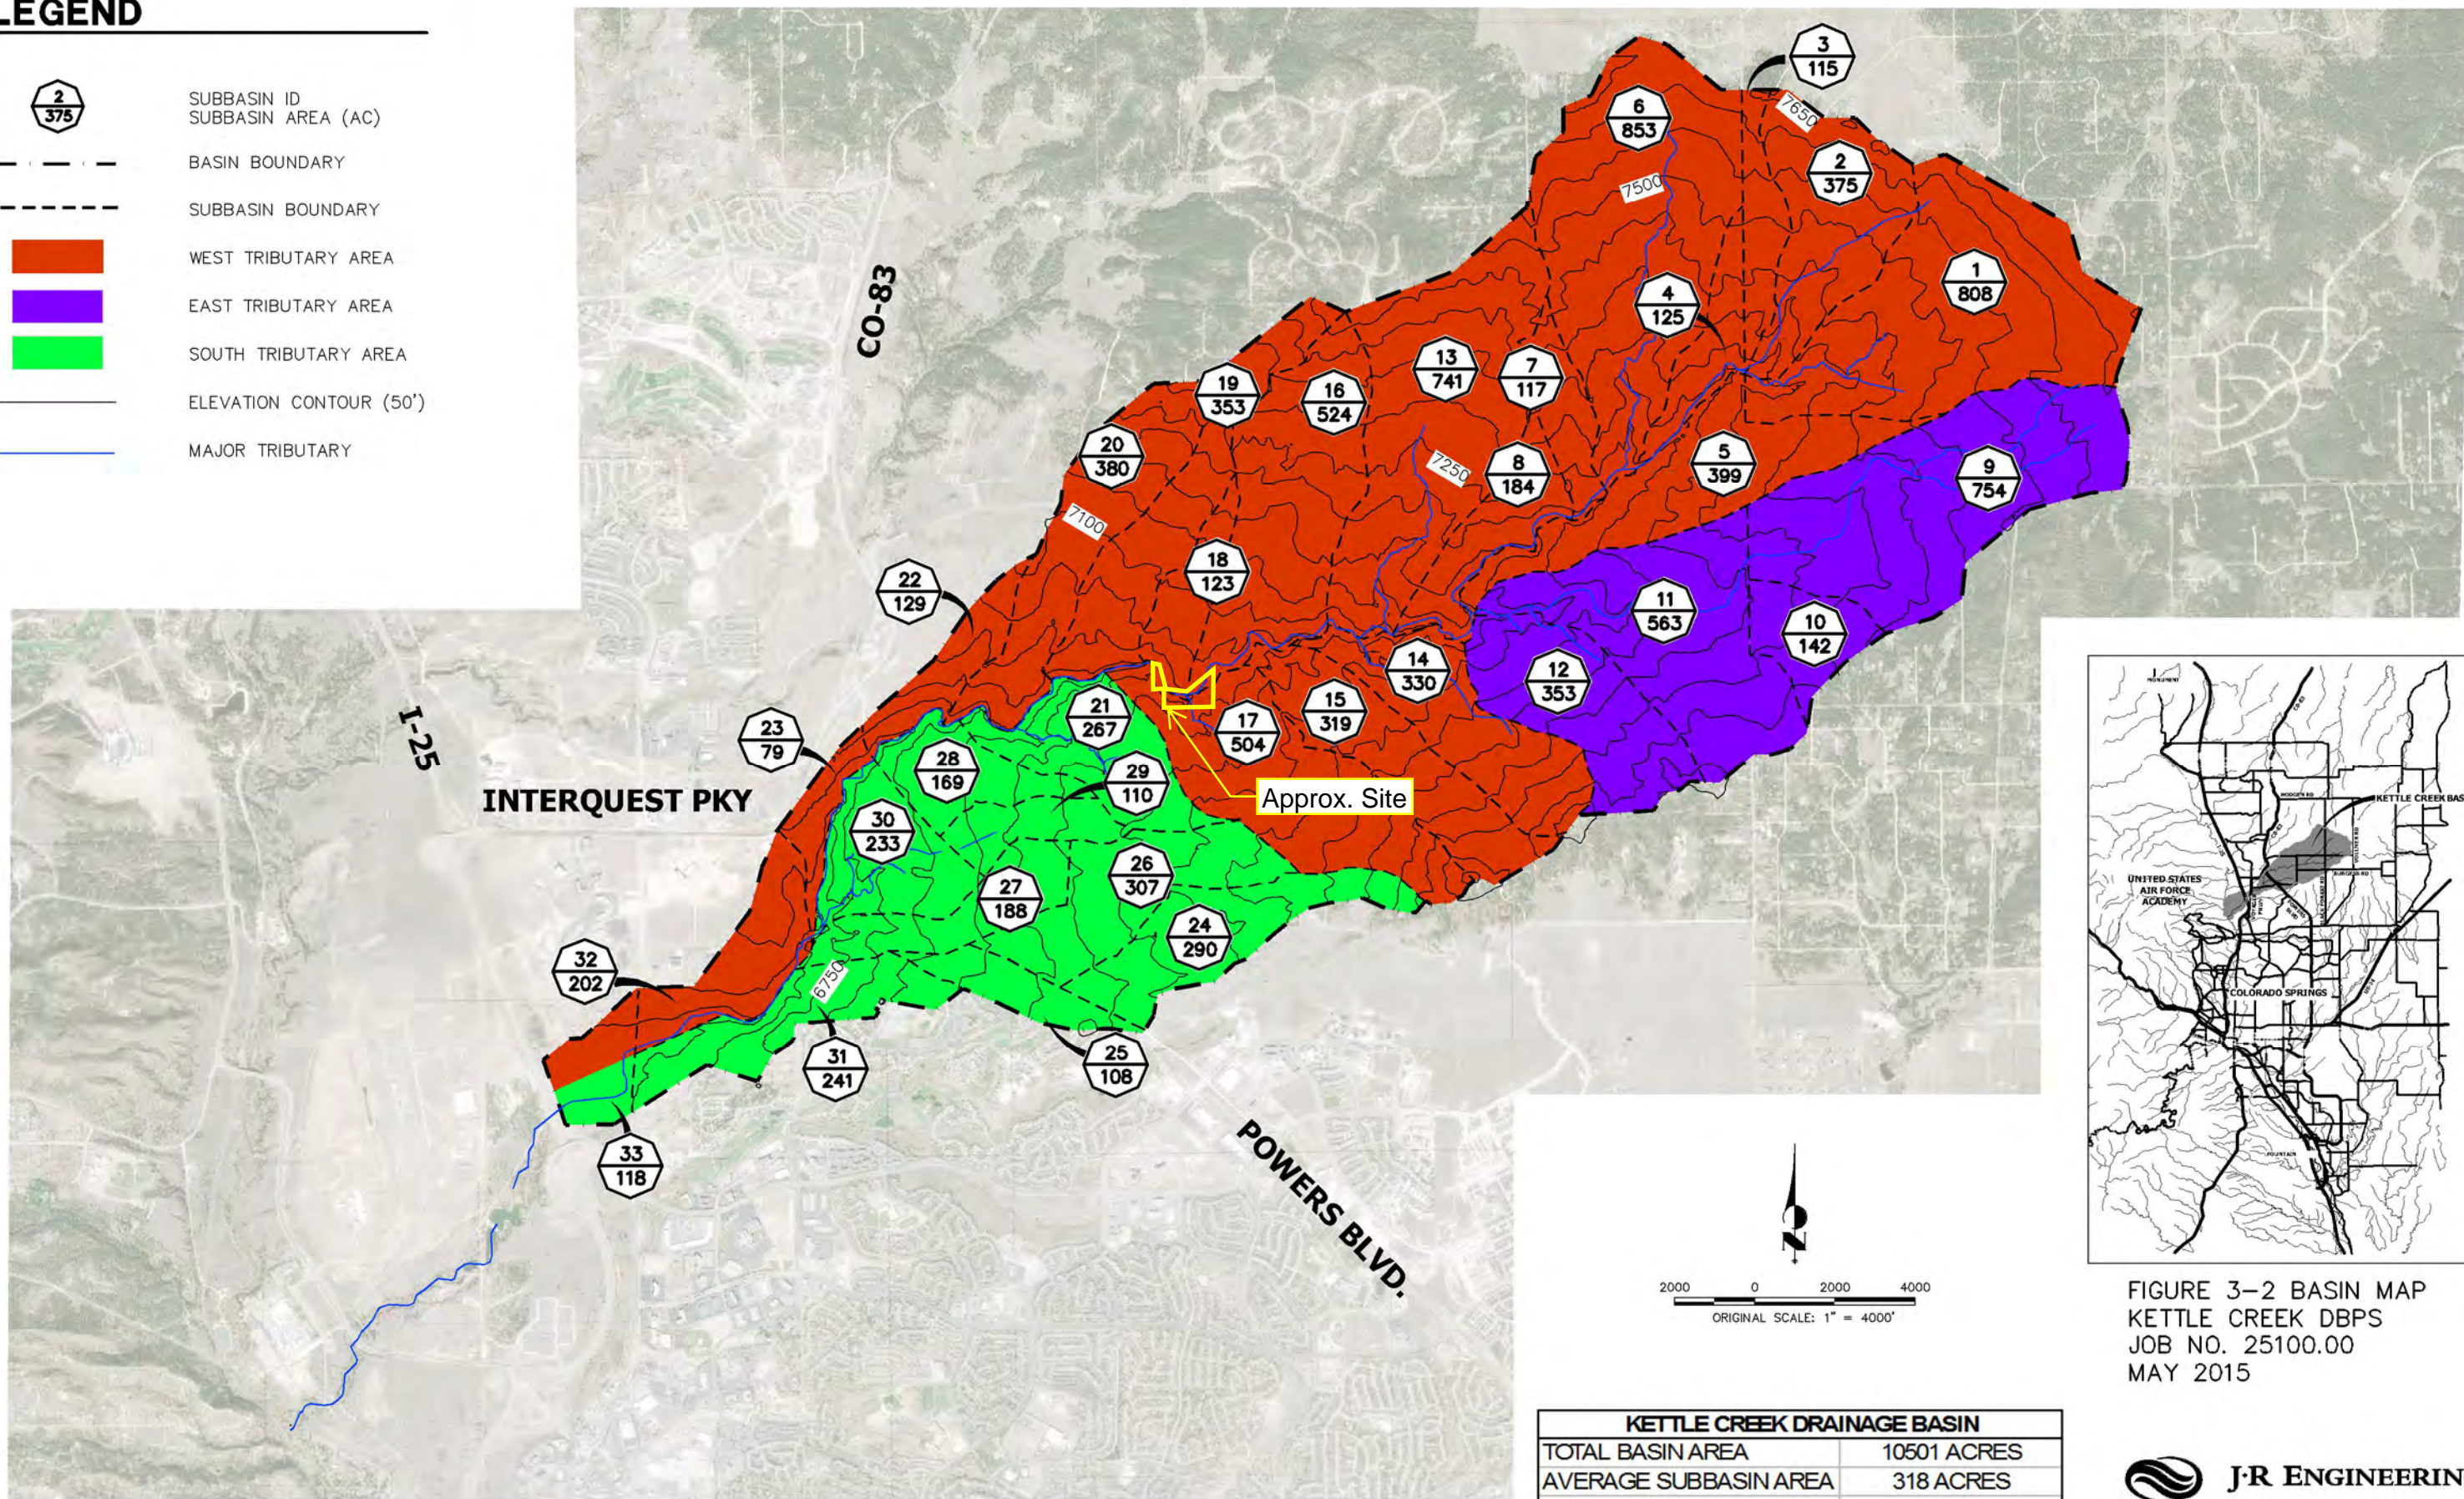


FIGURE 1-1 VICINITY MAP  
 KETTLE CREEK DBPS  
 JOB NO. 25100.00  
 MAY 2015

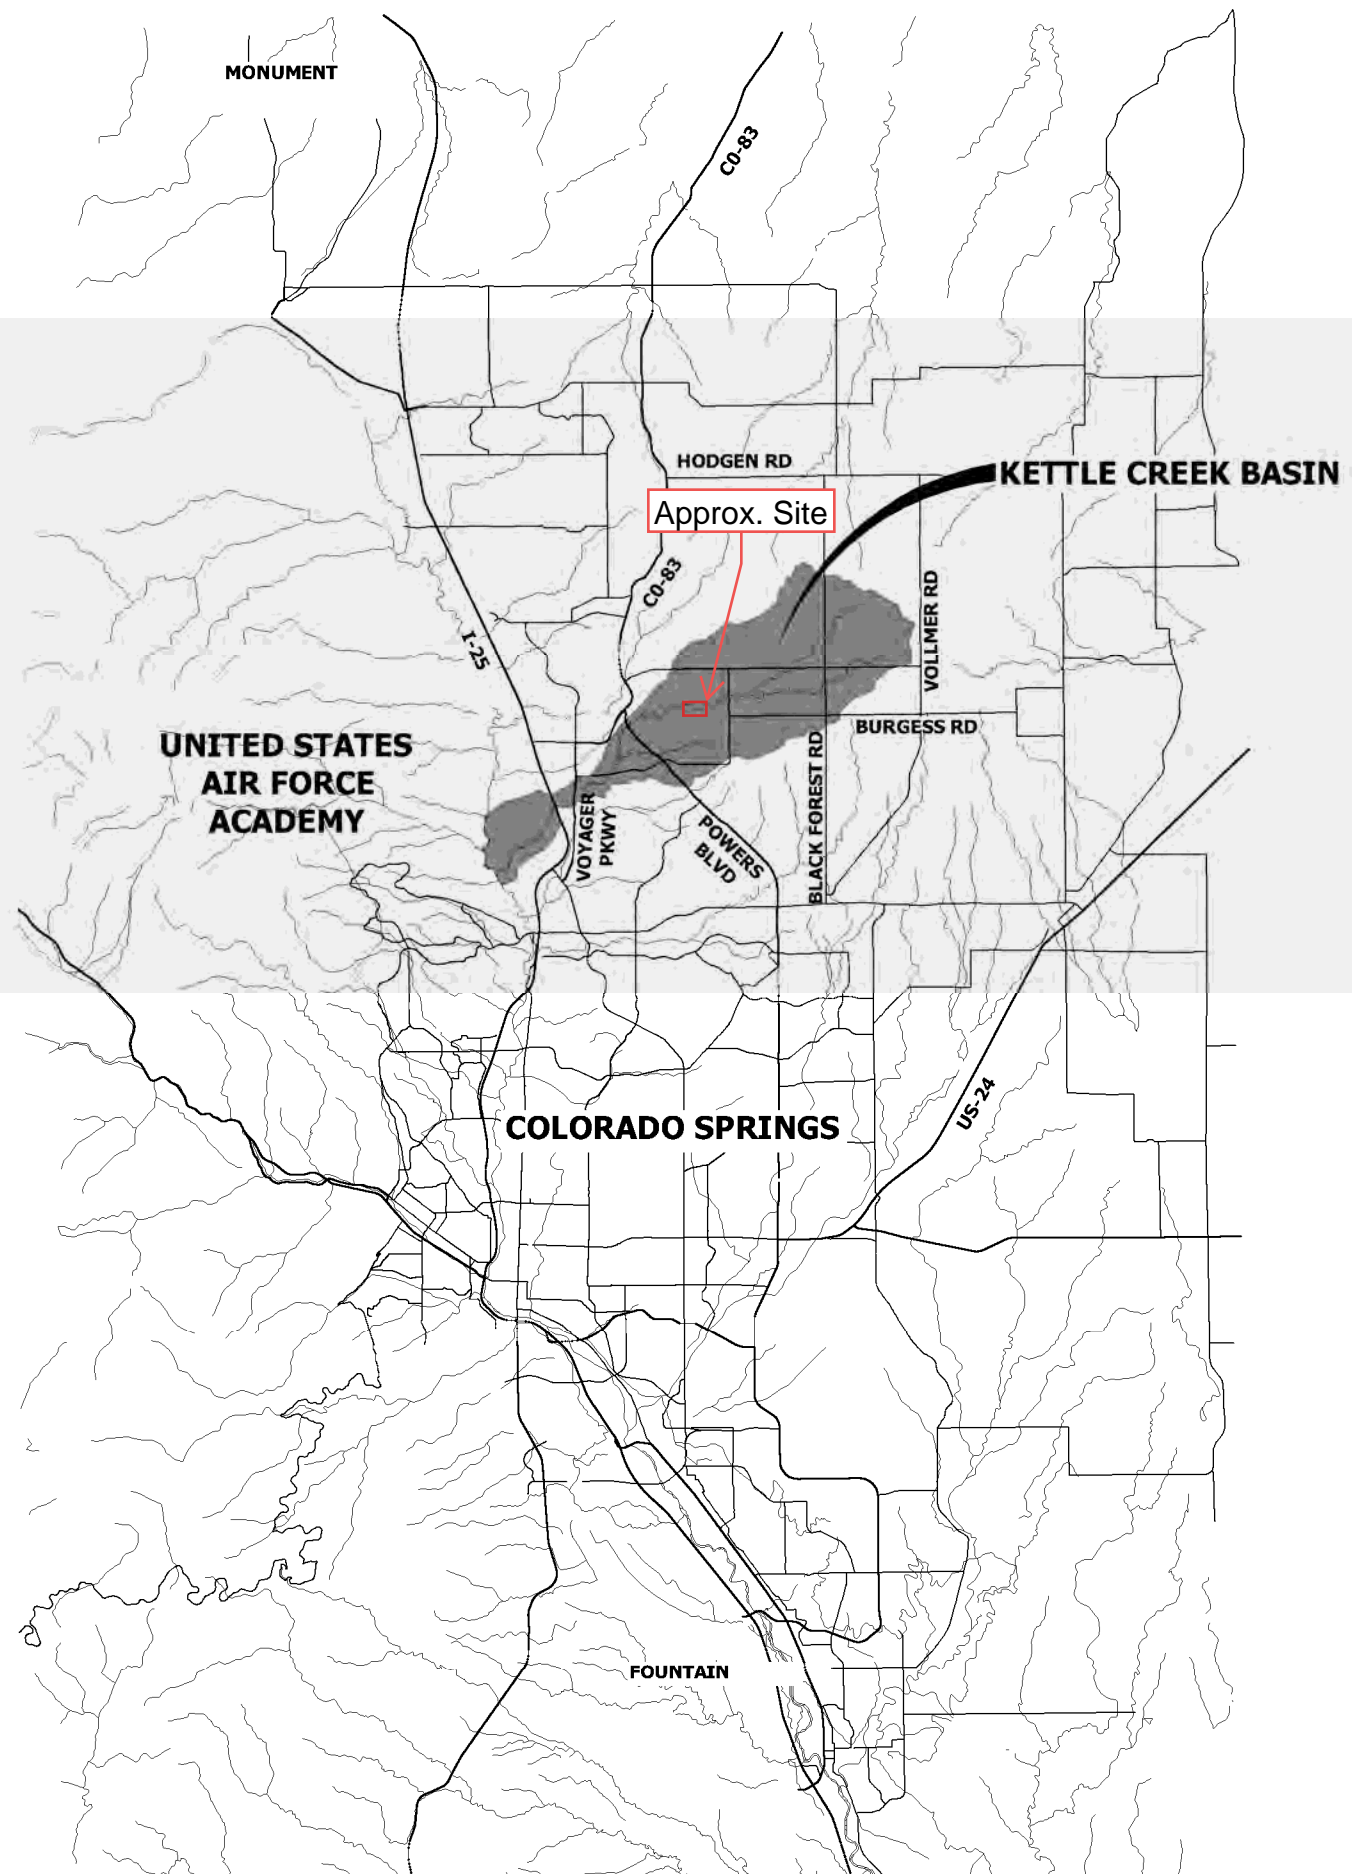

# LEGEND

-  SUBBASIN ID
-  SUBBASIN AREA (AC)
-  BASIN BOUNDARY
-  SUBBASIN BOUNDARY
-  WEST TRIBUTARY AREA
-  EAST TRIBUTARY AREA
-  SOUTH TRIBUTARY AREA
-  ELEVATION CONTOUR (50')
-  MAJOR TRIBUTARY



KETTLE CREEK DRAINAGE BASIN	
TOTAL BASIN AREA	10501 ACRES
AVERAGE SUBBASIN AREA	318 ACRES
MINIMUM SUBBASIN AREA	79 ACRES
MAXIMUM SUBBASIN AREA	853 ACRES

FIGURE 3-2 BASIN MAP  
KETTLE CREEK DBPS  
JOB NO. 25100.00  
MAY 2015



Centennial 303-740-9898 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • www.jrengineering.com



# LEGEND

- SUBBASIN ID
- 100-YEAR 24-HOUR FLOWS (CFS)
- 5-YEAR 24-HOUR FLOWS (CFS)
- BASIN BOUNDARY
- SUBBASIN BOUNDARY
- MAJOR TRIBUTARY
- JUNCTION












FIGURE 3-12 HYDROLOGY MAP (HISTORIC)  
 KETTLE CREEK DBPS  
 JOB NO. 25100.00  
 MAY 2015

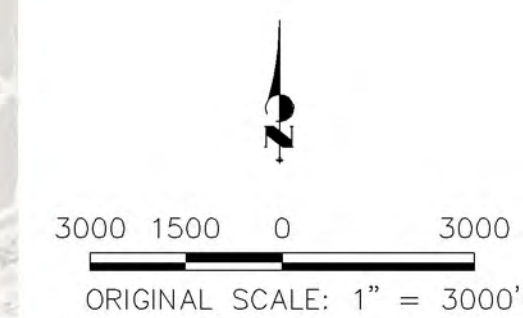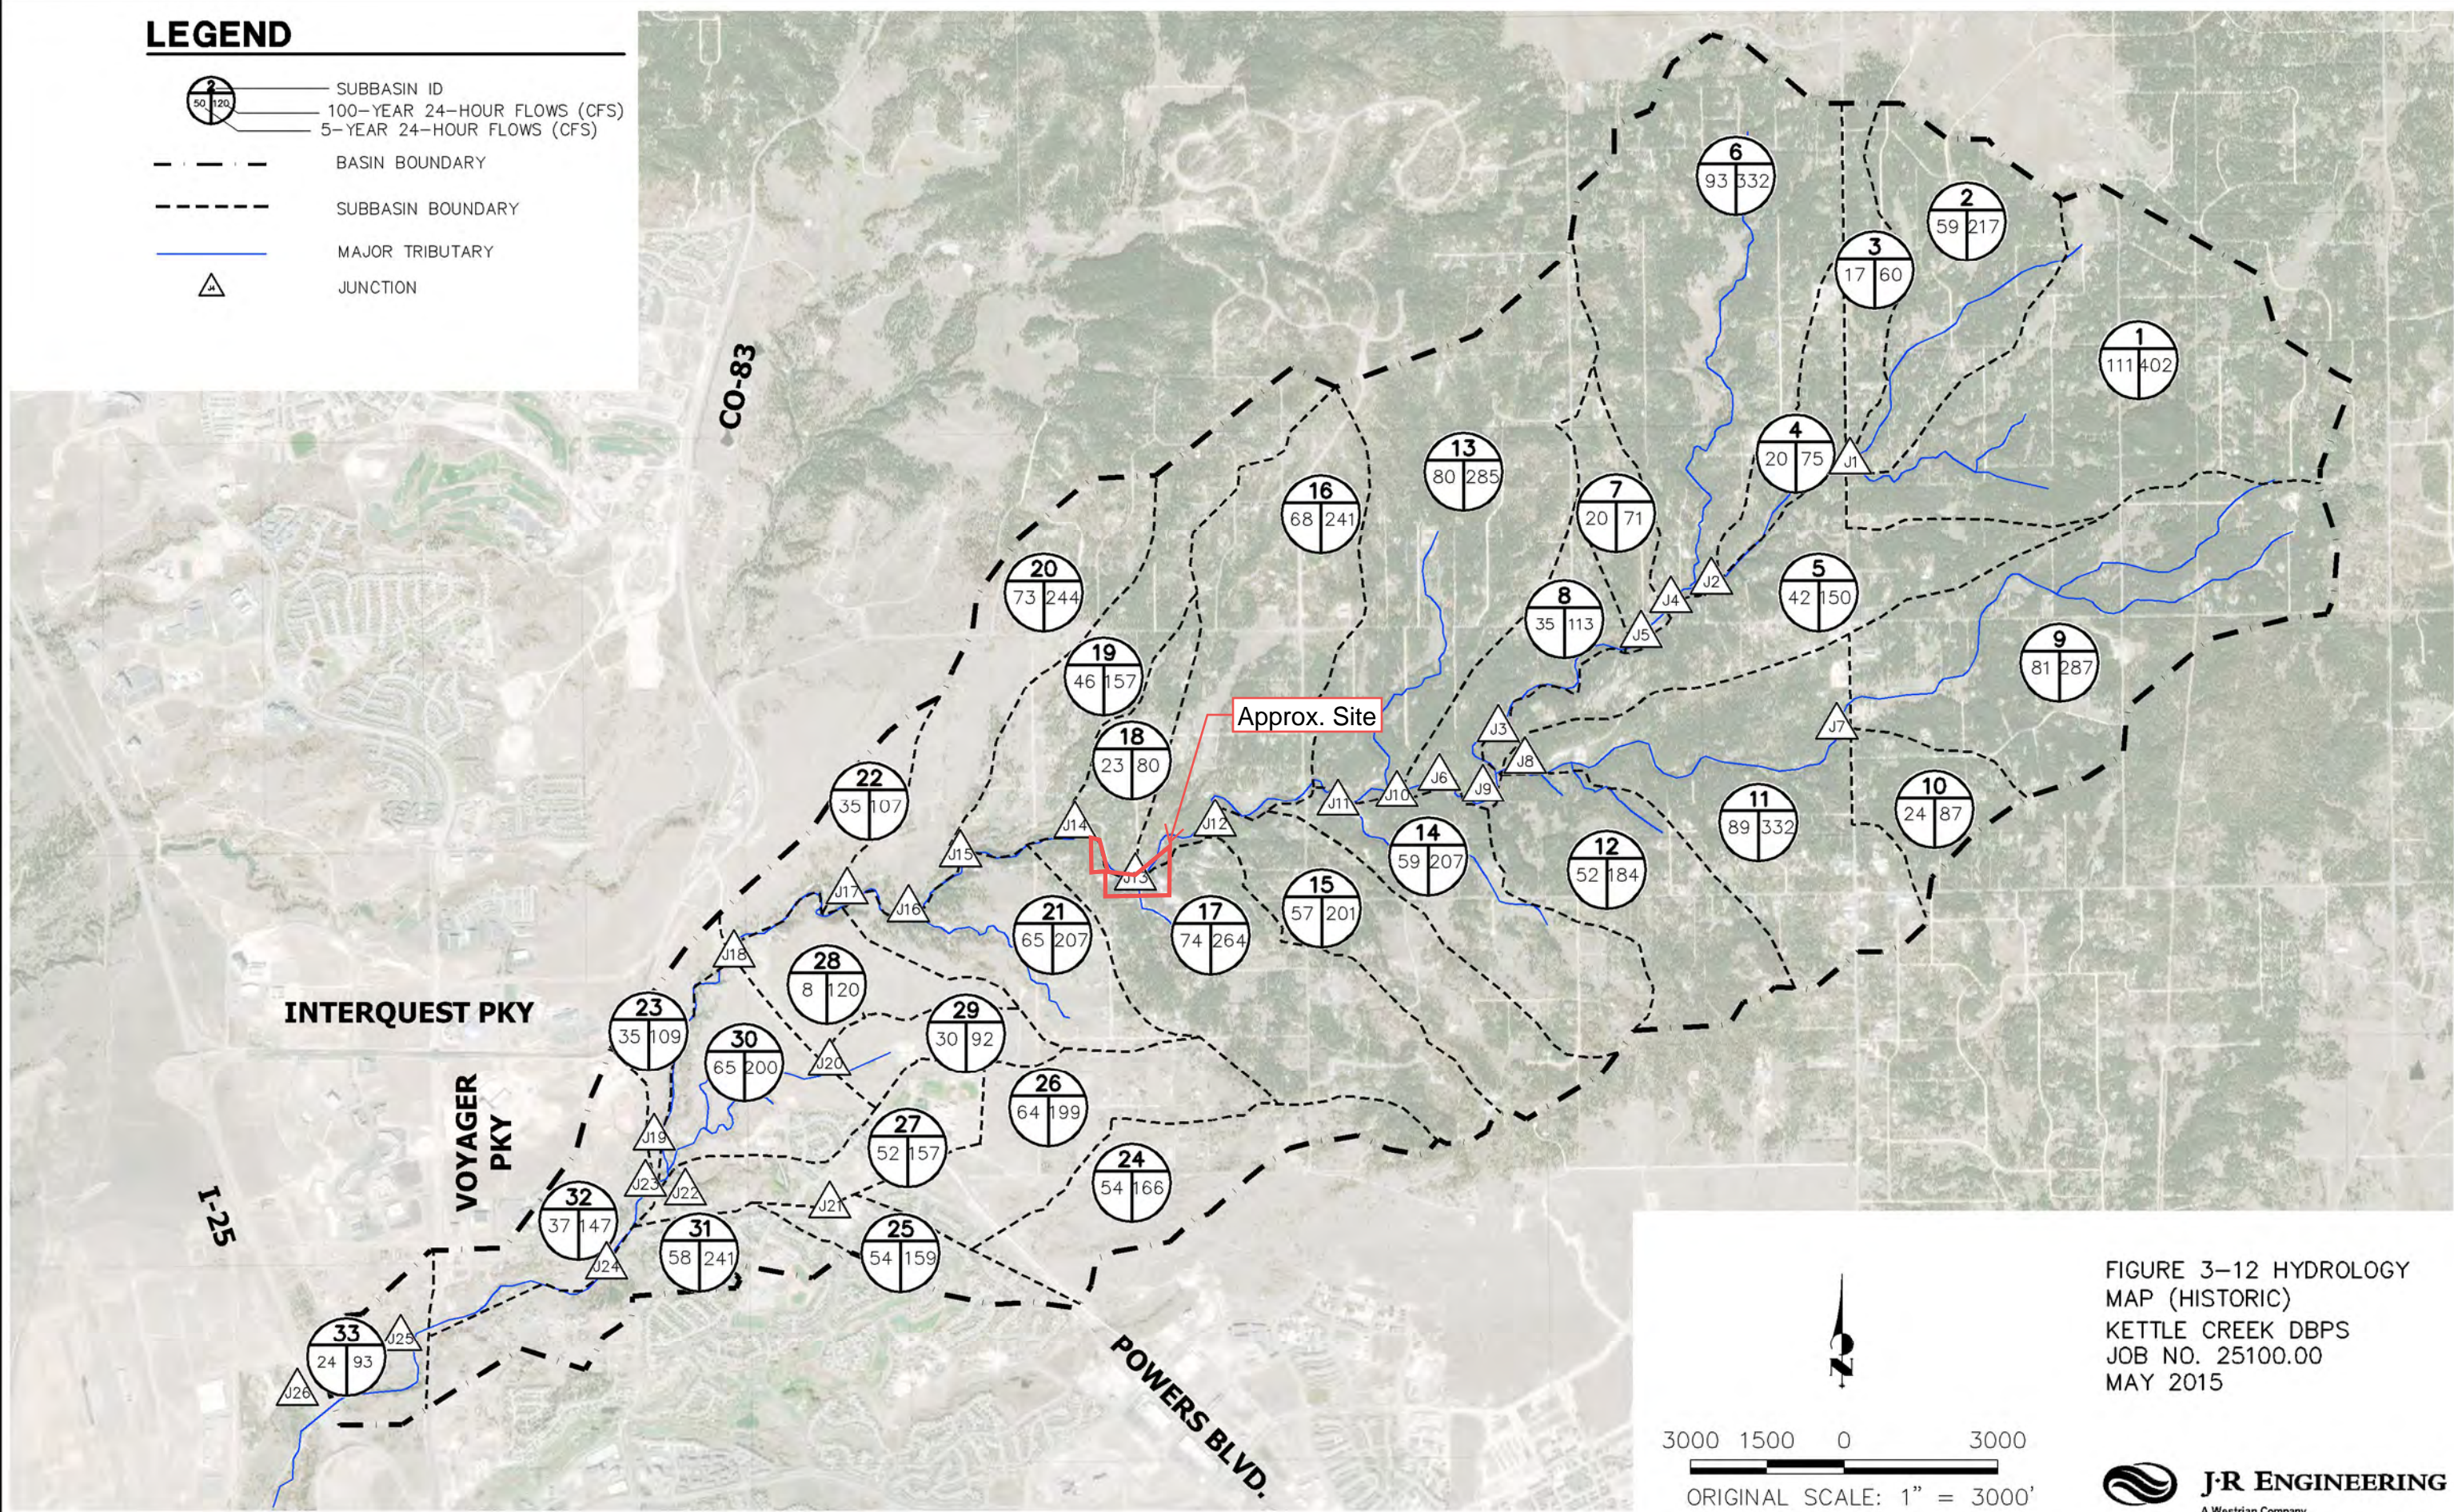

Centennial 303-740-9898 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • www.jrengineering.com



# LEGEND

-  SUBBASIN ID
-  100-YEAR 24-HOUR FLOWS (CFS)
-  5-YEAR 24-HOUR FLOWS (CFS)
-  BASIN BOUNDARY
-  SUBBASIN BOUNDARY
-  MAJOR TRIBUTARY
-  JUNCTION


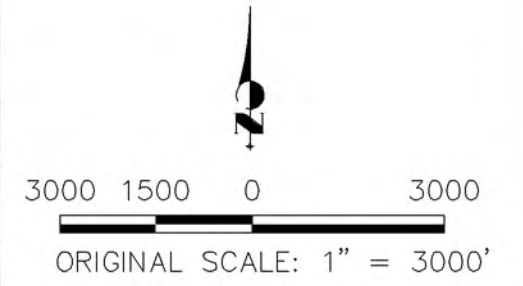


FIGURE 3-13 HYDROLOGY MAP (EXISTING)  
KETTLE CREEK DBPS  
JOB NO. 25100.00  
MAY 2015

## NOTE






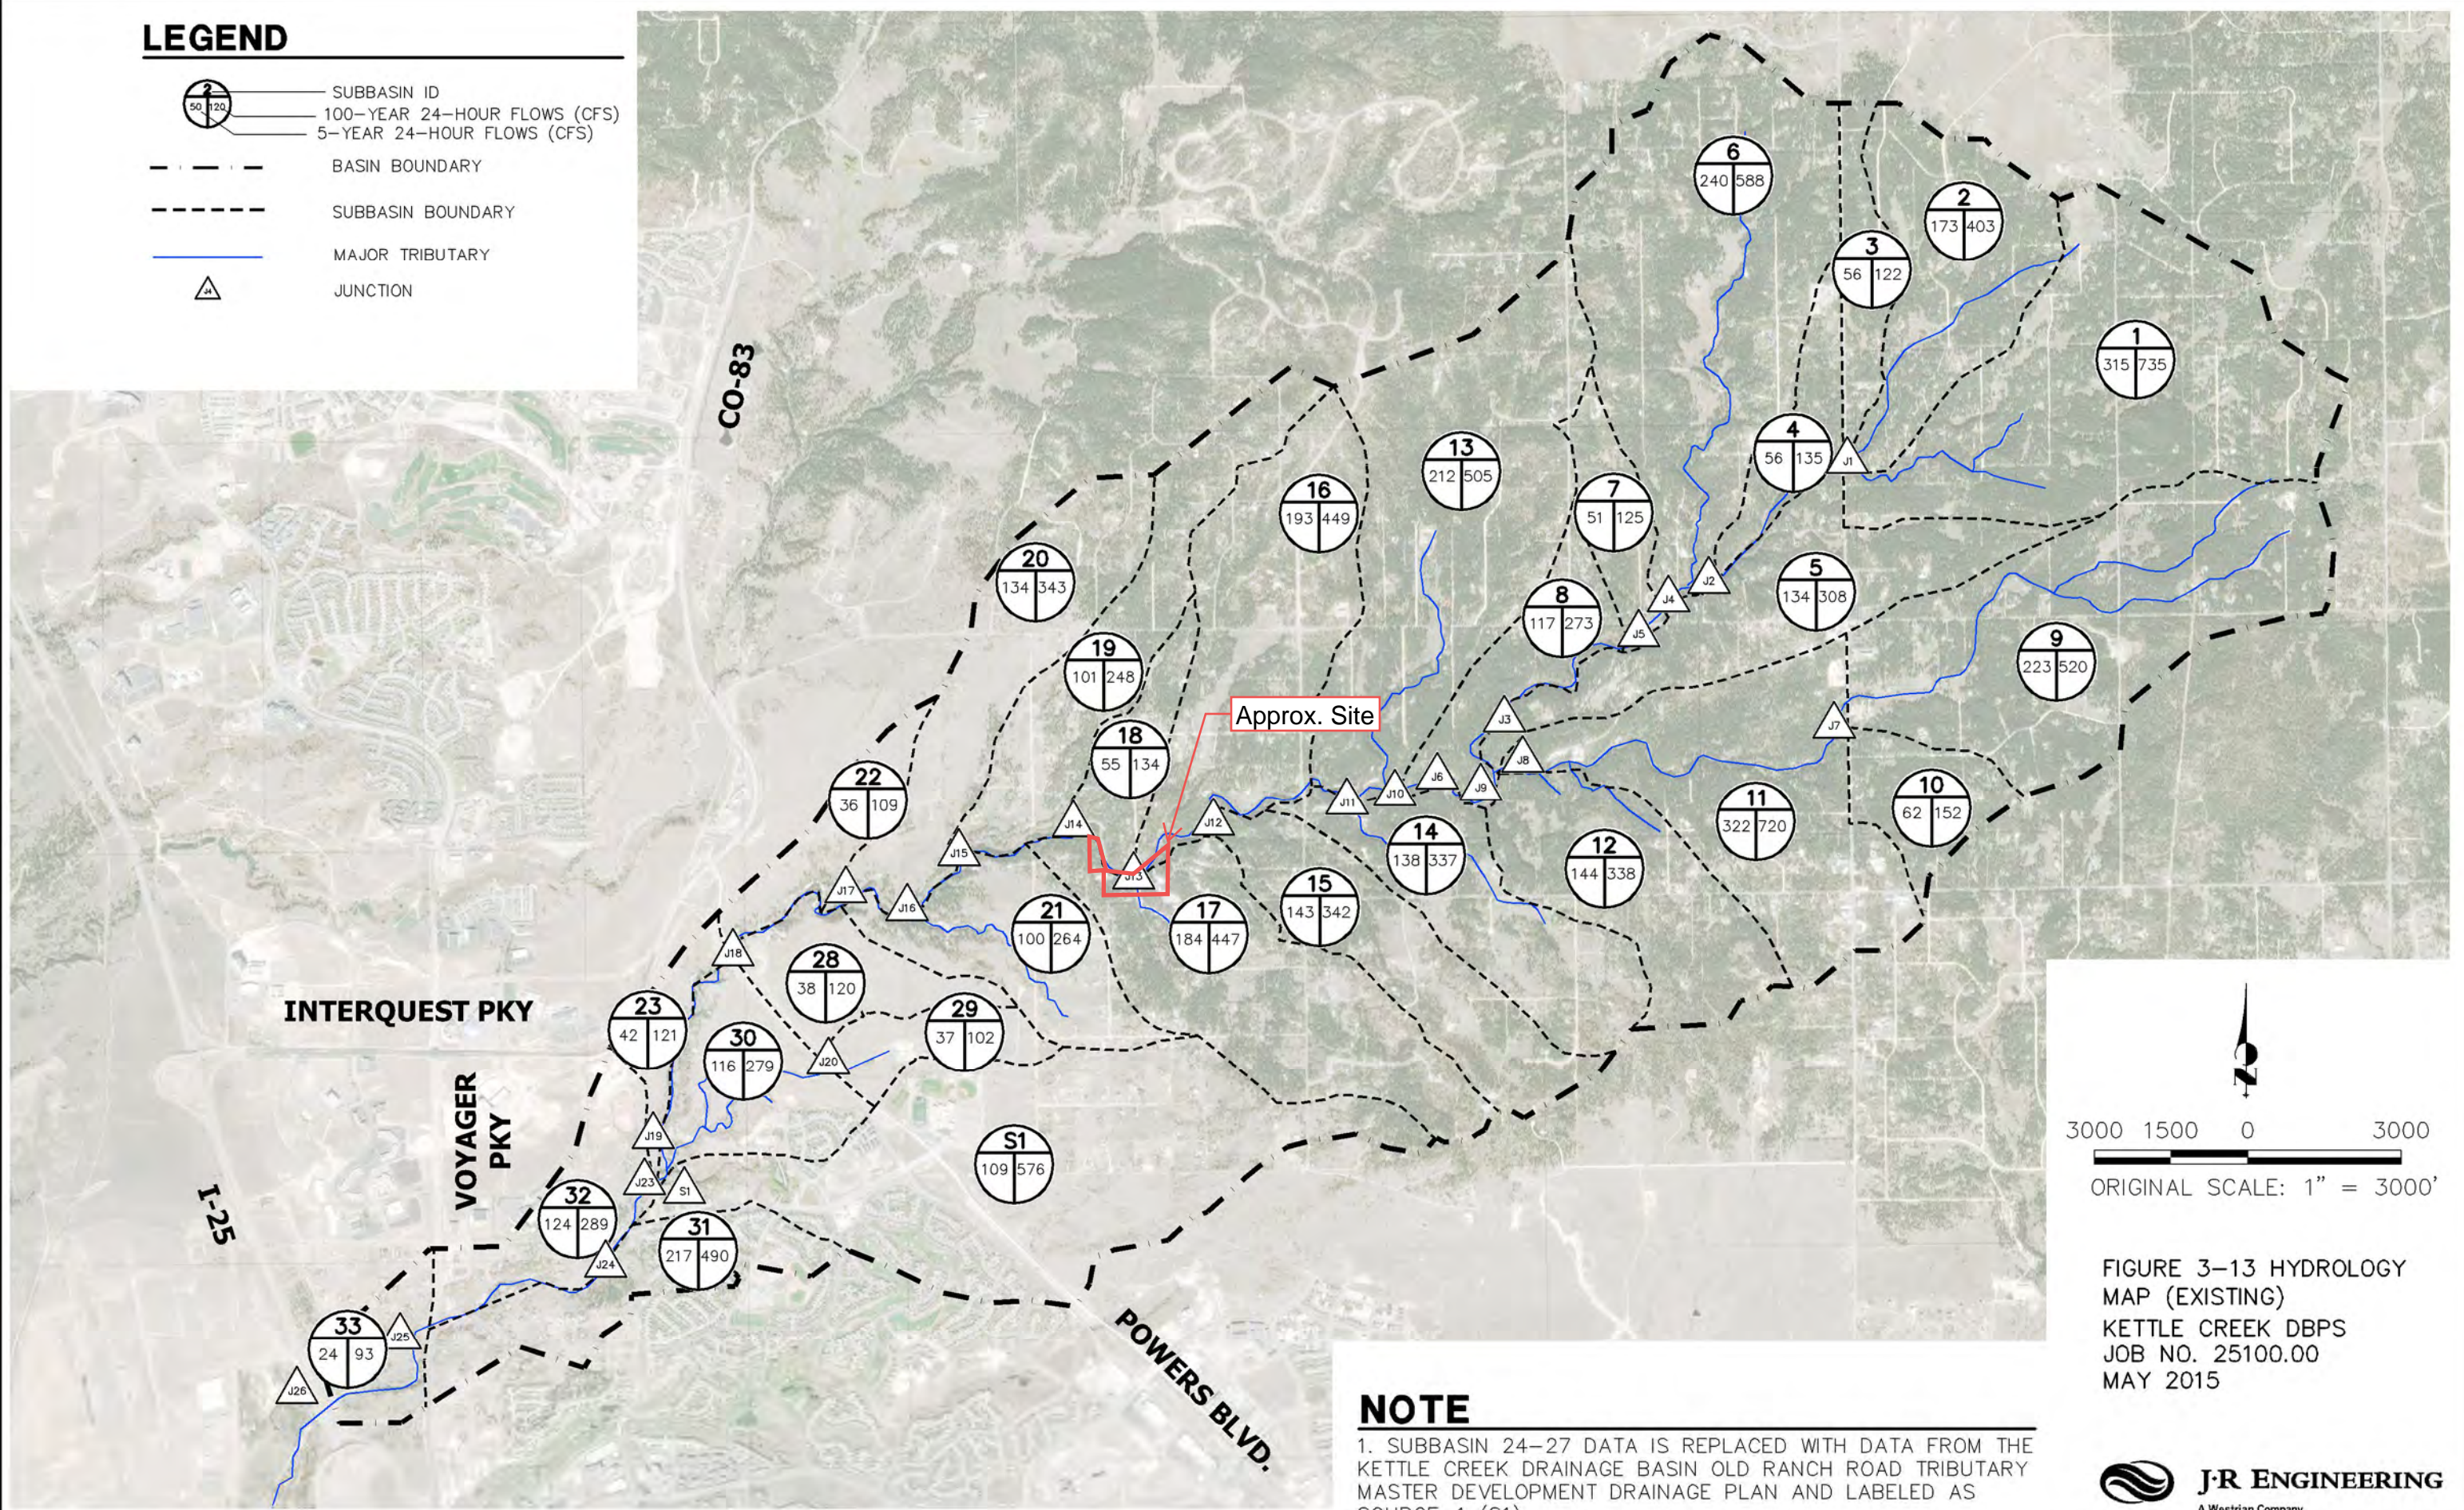

1. SUBBASIN 24-27 DATA IS REPLACED WITH DATA FROM THE KETTLE CREEK DRAINAGE BASIN OLD RANCH ROAD TRIBUTARY MASTER DEVELOPMENT DRAINAGE PLAN AND LABELED AS SOURCE-1 (S1).



Centennial 303-740-9898 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • www.jrengineering.com



# LEGEND

-  SUBBASIN ID
-  100-YEAR 24-HOUR FLOWS (CFS)
-  5-YEAR 24-HOUR FLOWS (CFS)
-  BASIN BOUNDARY
-  SUBBASIN BOUNDARY
-  MAJOR TRIBUTARY
-  JUNCTION


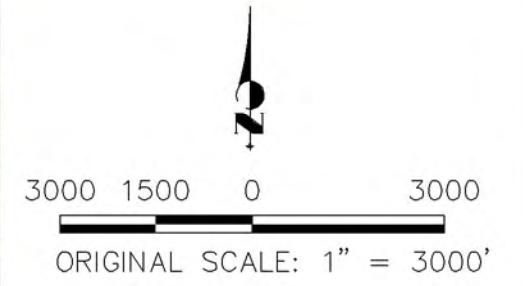


FIGURE 3-14 HYDROLOGY MAP (FUTURE)  
KETTLE CREEK DBPS  
JOB NO. 25100.00  
MAY 2015

## NOTE

1. SUBBASIN 24-27 DATA IS REPLACED WITH DATA FROM THE KETTLE CREEK DRAINAGE BASIN OLD RANCH ROAD TRIBUTARY MASTER DEVELOPMENT DRAINAGE PLAN AND LABELED AS SOURCE-1 (S1).

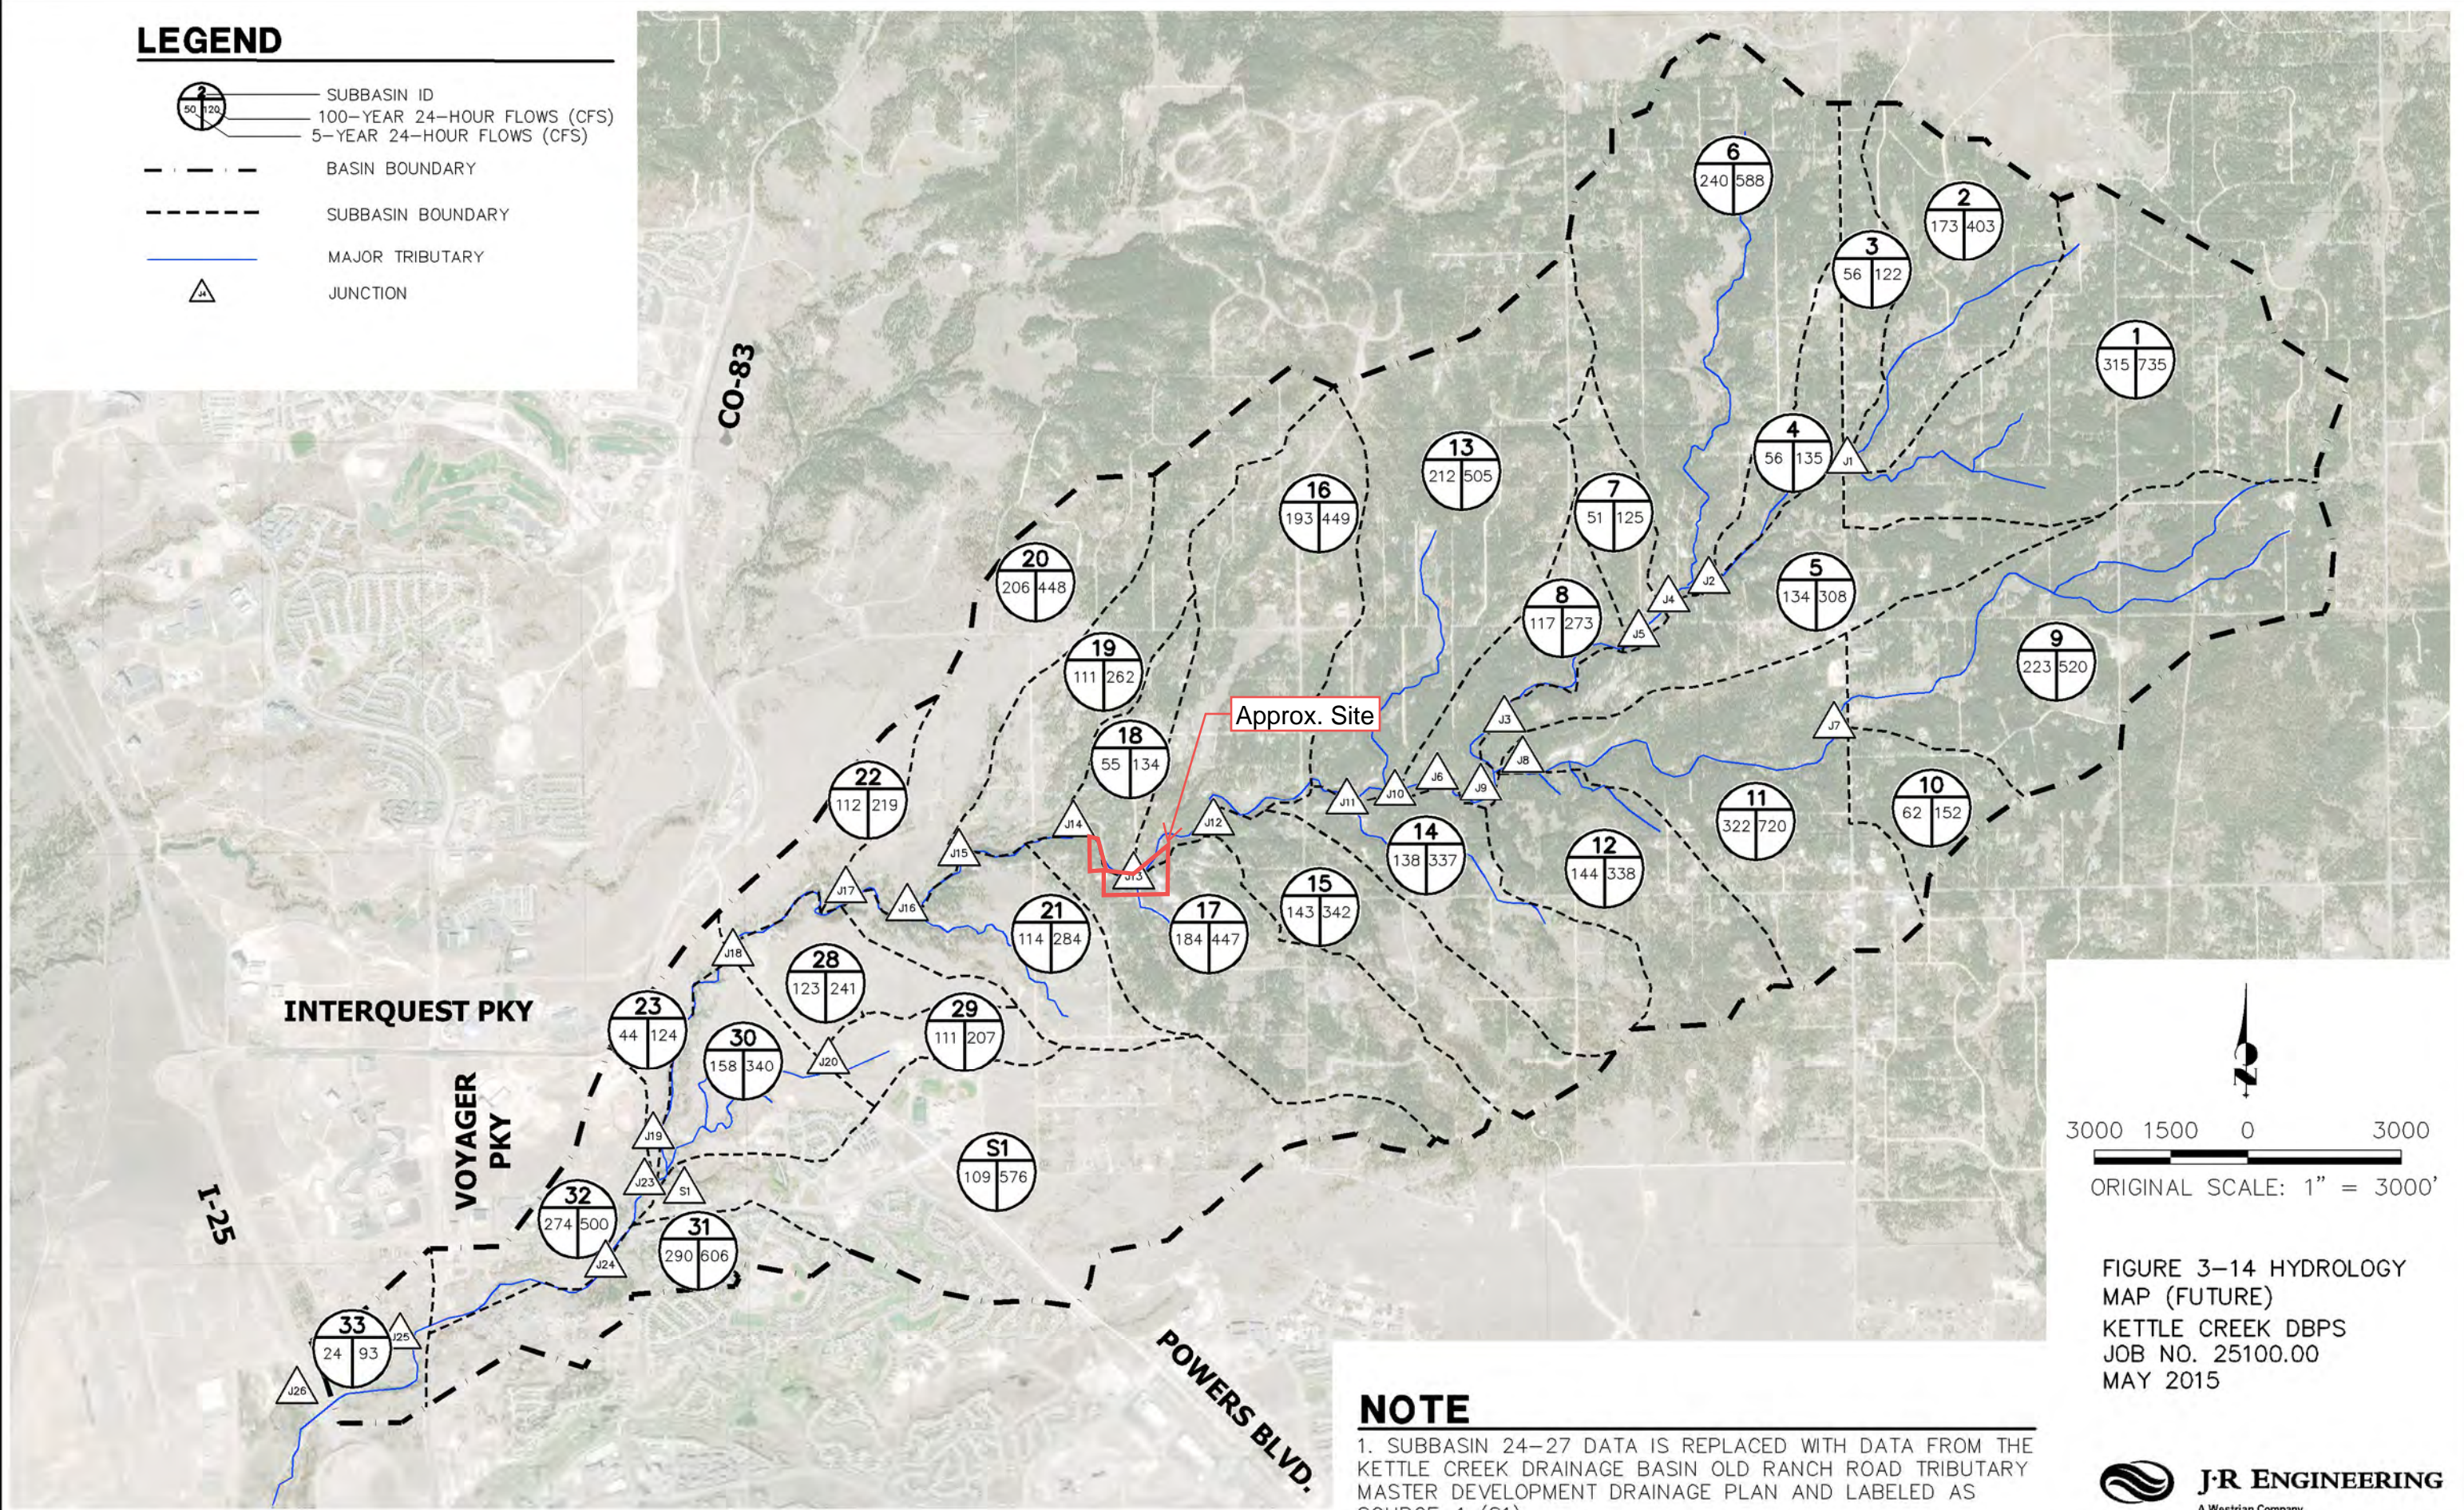

Centennial 303-740-9999 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • www.jrengineering.com



EXISTING CONDITIONS  
MODEL RESULTS  
(5-YEAR)

5-Year, 2-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Subbasin-1	1.263	286	0.51
Subbasin-2	0.586	160	0.52
Subbasin-3	0.180	56	0.65
Junction-1	2.029	492	0.52
Reach-1	2.029	490	0.52
Subbasin-4	0.195	50	0.45
Junction-2	2.224	536	0.52
Reach-2	2.224	536	0.52
Subbasin-5	0.625	119	0.56
Junction-3	2.849	644	0.53
Reach-3	2.849	644	0.53
Subbasin-6	1.333	203	0.43
Junction-4	4.182	846	0.5
Reach-4	4.182	846	0.5
Subbasin-7	0.183	45	0.44
Junction-5	4.365	865	0.49
Reach-5	4.365	862	0.49
Subbasin-8	0.288	104	0.52
Junction-6	4.653	885	0.49
Reach-6	4.653	883	0.49
Subbasin-9	1.177	195	0.51
Subbasin-10	0.222	55	0.43
Junction-7	1.399	217	0.49
Reach-7	1.399	217	0.49
Subbasin-11	0.880	302	0.61
Junction-8	2.279	437	0.54
Reach-8	2.279	434	0.54
Subbasin-12	0.552	127	0.5
Junction-9	2.831	546	0.53
Reach-9	2.831	545	0.53
Junction-10	7.484	1,305	0.51
Reach-10	7.484	1,305	0.51
Subbasin-13	1.156	183	0.47
Subbasin-14	0.516	122	0.44
Junction-11	9.156	1,437	0.5
Reach-11	9.156	1,435	0.5
Subbasin-15	0.498	127	0.47
Junction-12	9.654	1,445	0.5
Reach-12	9.654	1,442	0.5
Subbasin-16	0.819	175	0.51
Subbasin-17	0.788	164	0.44
Junction-13	11.261	1,475	0.49

5-Year, 2-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Reach-13	11.261	1,473	0.49
Subbasin-18	0.192	50	0.44
Junction-14	11.453	1,473	0.49
Reach-14	11.453	1,473	0.49
Subbasin-19	0.552	86	0.44
Junction-15	12.005	1,488	0.49
Reach-15	12.005	1,485	0.49
Subbasin-20	0.594	113	0.38
Junction-16	12.599	1,487	0.49
Reach-16	12.599	1,487	0.49
Subbasin-21	0.417	82	0.33
Junction-17	13.016	1,487	0.48
Reach-17	13.016	1,486	0.48
Subbasin-22	0.200	24	0.21
Junction-18	13.216	1,486	0.48
Reach-18	13.216	1,484	0.48
Subbasin-23	0.123	30	0.25
Junction-19	13.339	1,484	0.47
Reach-19	13.339	1,482	0.47
Subbasin-24	0.453	81	0.45
Subbasin-25	0.169	206	1.12
Subbasin-26	0.480	111	0.51
Junction-21	1.102	250	0.58
Reach-21	1.102	245	0.58
Subbasin-27	0.294	139	0.75
Junction-22	1.396	346	0.61
Reach-22	1.396	344	0.61
Subbasin-28	0.264	25	0.19
Subbasin-29	0.172	28	0.27
Junction-20	0.436	50	0.22
Reach-20	0.436	50	0.22
Subbasin-30	0.364	107	0.47
Junction-23	15.535	1,484	0.48
Reach-23	15.535	1,482	0.48
Subbasin-31	0.377	219	0.55
Subbasin-32	0.316	137	0.5
Junction-24	16.228	1,482	0.48
Reach-24	16.228	1,481	0.48
Subbasin-33	0.184	13	0.1
Junction-25	16.412	1481.1	0.48
Reach-25	16.412	1481.1	0.48
Junction-26	16.412	1481.1	0.48

5-Year, 24-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Subbasin-1	1.263	315	1.06
Subbasin-2	0.586	173	1.06
Subbasin-3	0.180	56	1.27
Junction-1	2.029	527	1.08
Reach-1	2.029	526	1.08
Subbasin-4	0.195	56	0.97
Junction-2	2.224	572	1.07
Reach-2	2.224	568	1.07
Subbasin-5	0.625	134	1.14
Junction-3	2.849	689	1.08
Reach-3	2.849	689	1.08
Subbasin-6	1.333	240	0.94
Junction-4	4.182	928	1.04
Reach-4	4.182	917	1.04
Subbasin-7	0.183	51	0.97
Junction-5	4.365	940	1.03
Reach-5	4.365	929	1.03
Subbasin-8	0.288	117	1.1
Junction-6	4.653	959	1.04
Reach-6	4.653	944	1.04
Subbasin-9	1.177	223	1.05
Subbasin-10	0.222	62	0.93
Junction-7	1.399	252	1.03
Reach-7	1.399	250	1.03
Subbasin-11	0.880	322	1.23
Junction-8	2.279	484	1.11
Reach-8	2.279	484	1.11
Subbasin-12	0.552	144	1.06
Junction-9	2.831	609	1.1
Reach-9	2.831	594	1.1
Junction-10	7.484	1,444	1.06
Reach-10	7.484	1,428	1.06
Subbasin-13	1.156	212	1
Subbasin-14	0.516	138	0.95
Junction-11	9.156	1,605	1.05
Reach-11	9.156	1,604	1.05
Subbasin-15	0.498	143	1
Junction-12	9.654	1,636	1.05
Reach-12	9.654	1,634	1.05

5-Year, 24-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Subbasin-16	0.819	193	1.06
Subbasin-17	0.788	184	0.95
Junction-13	11.261	1,730	1.04
Reach-13	11.261	1,705	1.04
Subbasin-18	0.192	55	0.95
Junction-14	11.453	1,711	1.04
Reach-14	11.453	1,710	1.04
Subbasin-19	0.552	101	0.95
Junction-15	12.005	1,745	1.03
Reach-15	12.005	1,741	1.03
Subbasin-20	0.594	134	0.86
Junction-16	12.599	1,760	1.03
Reach-16	12.599	1,741	1.03
Subbasin-21	0.417	100	0.79
Junction-17	13.016	1,752	1.02
Reach-17	13.016	1,752	1.02
Subbasin-22	0.200	36	0.59
Junction-18	13.216	1,756	1.01
Reach-18	13.216	1,746	1.01
Subbasin-23	0.123	42	0.66
Junction-19	13.339	1,748	1.01
Reach-19	13.339	1,747	1.01
Source-1	1.396	109	0.58
Subbasin-28	0.264	38	0.57
Subbasin-29	0.172	37	0.7
Junction-20	0.436	75	0.62
Reach-20	0.436	70	0.62
Subbasin-30	0.364	116	1
Junction-23	15.535	1,764	0.96
Reach-23	15.535	1,751	0.96
Subbasin-31	0.377	217	1.05
Subbasin-32	0.316	124	1.01
Junction-24	16.228	1,766	0.96
Reach-24	16.228	1,754	0.96
Subbasin-33	0.184	24	0.37
Junction-25	16.412	1,756	0.96
Reach-25	16.412	1,750	0.96
Junction-26	16.412	1,750	0.96

NOTE:

1. SOURCE-1 IS THE 24 HOUR FLOW DATA FOR SUBBASINS 24-27, JUNCTION 22, AND REACHES 21-22. SUBBASINS 24-27 DATA HAS BEEN REPLACED WITH KETTLE CREEK DRAINAGE BASIN OLD RANCH ROAD TRIBUTARY MASTER DEVELOPMENT PLAN FLOW DATA (JR ENG. 2001).

APPENDIX B – HYDROLOGIC RESULTS – EXISTING 5-YR KETTLE CREEK DBPS  
JOB NO. 25100.00  
MAY 2015  
B-43



EXISTING CONDITIONS  
MODEL RESULTS  
(100-YEAR)

100-Year, 2-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Subbasin-1	1.263	634	1.12
Subbasin-2	0.586	355	1.13
Subbasin-3	0.180	115	1.33
Junction-1	2.029	1,082	1.14
Reach-1	2.029	1,080	1.14
Subbasin-4	0.195	117	1.03
Junction-2	2.224	1,184	1.13
Reach-2	2.224	1,184	1.13
Subbasin-5	0.625	262	1.21
Junction-3	2.849	1,423	1.15
Reach-3	2.849	1,423	1.15
Subbasin-6	1.333	474	0.99
Junction-4	4.182	1,895	1.10
Reach-4	4.182	1,894	1.10
Subbasin-7	0.183	106	1.03
Junction-5	4.365	1,938	1.10
Reach-5	4.365	1,931	1.10
Subbasin-8	0.288	242	1.17
Junction-6	4.653	1,980	1.10
Reach-6	4.653	1,977	1.10
Subbasin-9	1.177	433	1.11
Subbasin-10	0.222	132	0.99
Junction-7	1.399	483	1.09
Reach-7	1.399	483	1.09
Subbasin-11	0.880	657	1.30
Junction-8	2.279	959	1.17
Reach-8	2.279	953	1.17
Subbasin-12	0.552	291	1.12
Junction-9	2.831	1,208	1.16
Reach-9	2.831	1,205	1.16
Junction-10	7.484	2,905	1.12
Reach-10	7.484	2,903	1.12
Subbasin-13	1.156	418	1.06
Subbasin-14	0.516	285	1.01
Junction-11	9.156	3,198	1.11
Reach-11	9.156	3,195	1.11
Subbasin-15	0.498	293	1.06
Junction-12	9.654	3,218	1.11
Reach-12	9.654	3,213	1.11
Subbasin-16	0.819	387	1.12
Subbasin-17	0.788	382	1.01
Junction-13	11.261	3,283	1.10

100-Year, 2-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Reach-13	11.261	3,280	1.10
Subbasin-18	0.192	118	1.01
Junction-14	11.453	3,281	1.10
Reach-14	11.453	3,279	1.10
Subbasin-19	0.552	201	1.00
Junction-15	12.005	3,314	1.09
Reach-15	12.005	3,309	1.09
Subbasin-20	0.594	279	0.91
Junction-16	12.599	3,313	1.09
Reach-16	12.599	3,312	1.09
Subbasin-21	0.417	217	0.84
Junction-17	13.016	3,312	1.08
Reach-17	13.016	3,308	1.08
Subbasin-22	0.200	81	0.64
Junction-18	13.216	3,308	1.07
Reach-18	13.216	3,305	1.07
Subbasin-23	0.123	93	0.71
Junction-19	13.339	3,305	1.07
Reach-19	13.339	3,302	1.07
Subbasin-24	0.453	188	1.03
Subbasin-25	0.169	374	2.01
Subbasin-26	0.480	247	1.12
Junction-21	1.102	463	1.22
Reach-21	1.102	463	1.22
Subbasin-27	0.294	279	1.49
Junction-22	1.396	689	1.28
Reach-22	1.396	687	1.28
Subbasin-28	0.264	83	0.62
Subbasin-29	0.172	80	0.75
Junction-20	0.436	157	0.67
Reach-20	0.436	156	0.67
Subbasin-30	0.364	250	1.06
Junction-23	15.535	3,305	1.08
Reach-23	15.535	3,298	1.08
Subbasin-31	0.377	458	1.11
Subbasin-32	0.316	298	1.06
Junction-24	16.228	3,298	1.08
Reach-24	16.228	3,297	1.08
Subbasin-33	0.184	57	0.41
Junction-25	16.412	3297.4	1.07
Reach-25	16.412	3297.4	1.07
Junction-26	16.412	3297.4	1.07

100-Year, 24-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Subbasin-1	1.263	735	2.36
Subbasin-2	0.586	403	2.37
Subbasin-3	0.180	122	2.67
Junction-1	2.029	1,217	2.39
Reach-1	2.029	1,216	2.39
Subbasin-4	0.195	135	2.22
Junction-2	2.224	1,325	2.38
Reach-2	2.224	1,322	2.38
Subbasin-5	0.625	308	2.52
Junction-3	2.849	1,602	2.41
Reach-3	2.849	1,602	2.41
Subbasin-6	1.333	588	2.18
Junction-4	4.182	2,190	2.34
Reach-4	4.182	2,153	2.34
Subbasin-7	0.183	125	2.24
Junction-5	4.365	2,208	2.33
Reach-5	4.365	2,186	2.33
Subbasin-8	0.288	273.3	2.48
Junction-6	4.653	2253.3	2.34
Reach-6	4.653	2,213	2.34
Subbasin-9	1.177	520	2.35
Subbasin-10	0.222	152	2.17
Junction-7	1.399	593	2.32
Reach-7	1.399	588	2.32
Subbasin-11	0.880	720	2.66
Junction-8	2.279	1,114	2.45
Reach-8	2.279	1,112	2.45
Subbasin-12	0.552	338	2.39
Junction-9	2.831	1,403	2.44
Reach-9	2.831	1,368	2.44
Junction-10	7.484	3,375	2.38
Reach-10	7.484	3,329	2.38
Subbasin-13	1.156	505	2.28
Subbasin-14	0.516	337	2.20
Junction-11	9.156	3,761	2.36
Reach-11	9.156	3,756	2.36
Subbasin-15	0.498	342	2.28
Junction-12	9.654	3,828	2.35
Reach-12	9.654	3,823	2.35

100-Year, 24-Hour Storm			
Hydrologic Element	Drainage Area (mi <sup>2</sup> )	Peak Discharge (CFS)	Volume (in)
Subbasin-16	0.819	449	2.37
Subbasin-17	0.788	447	2.20
Junction-13	11.261	4,038	2.34
Reach-13	11.261	3,975	2.34
Subbasin-18	0.192	134.1	2.2
Junction-14	11.453	3,992	2.34
Reach-14	11.453	3,987	2.34
Subbasin-19	0.552	248	2.19
Junction-15	12.005	4,069	2.33
Reach-15	12.005	4,058	2.33
Subbasin-20	0.594	343	2.06
Junction-16	12.599	4,103	2.32
Reach-16	12.599	4,064	2.32
Subbasin-21	0.417	264	1.96
Junction-17	13.016	4,091	2.31
Reach-17	13.016	4,081	2.31
Subbasin-22	0.200	109	1.66
Junction-18	13.216	4,091	2.30
Reach-18	13.216	4,080	2.30
Subbasin-23	0.123	121	1.75
Junction-19	13.339	4,086	2.29
Reach-19	13.339	4,081	2.29
Source-1	1.396	576	1.58
Subbasin-28	0.264	120	1.63
Subbasin-29	0.172	102	1.83
Junction-20	0.436	222	1.71
Reach-20	0.436	207	1.71
Subbasin-30	0.364	279	2.28
Junction-23	15.535	4,121	2.21
Reach-23	15.535	4,081	2.21
Subbasin-31	0.377	490	2.26
Subbasin-32	0.316	289	2.22
Junction-24	16.228	4,114	2.22
Reach-24	16.228	4,096	2.22
Subbasin-33	0.184	93	1.21
Junction-25	16.412	4,102	2.20
Reach-25	16.412	4,084	2.20
Junction-26	16.412	4,084	2.20

NOTE:



1. SOURCE-1 IS THE 24 HOUR FLOW DATA FOR SUBBASINS 24-27, JUNCTION 22, AND REACHES 21-22. SUBBASINS 24-27 DATA HAS BEEN REPLACED WITH KETTLE CREEK DRAINAGE BASIN OLD RANCH ROAD TRIBUTARY MASTER DEVELOPMENT PLAN FLOW DATA (JR ENG. 2001).

APPENDIX B – HYDROLOGIC RESULTS – EXISTING 100-YR KETTLE CREEK DBPS  
JOB NO. 25100.00  
MAY 2015  
B-47



# CANYON CREEK RANCH

## EXISTING ON-SITE DRAINAGE AND KETTLE CREEK

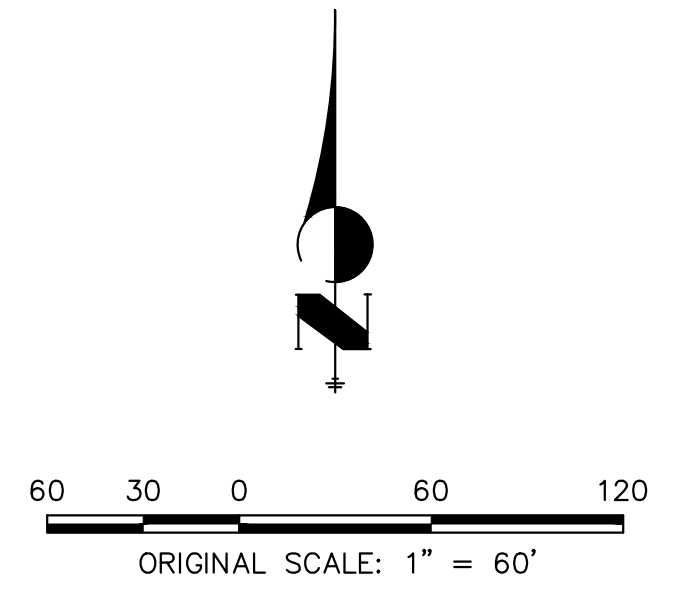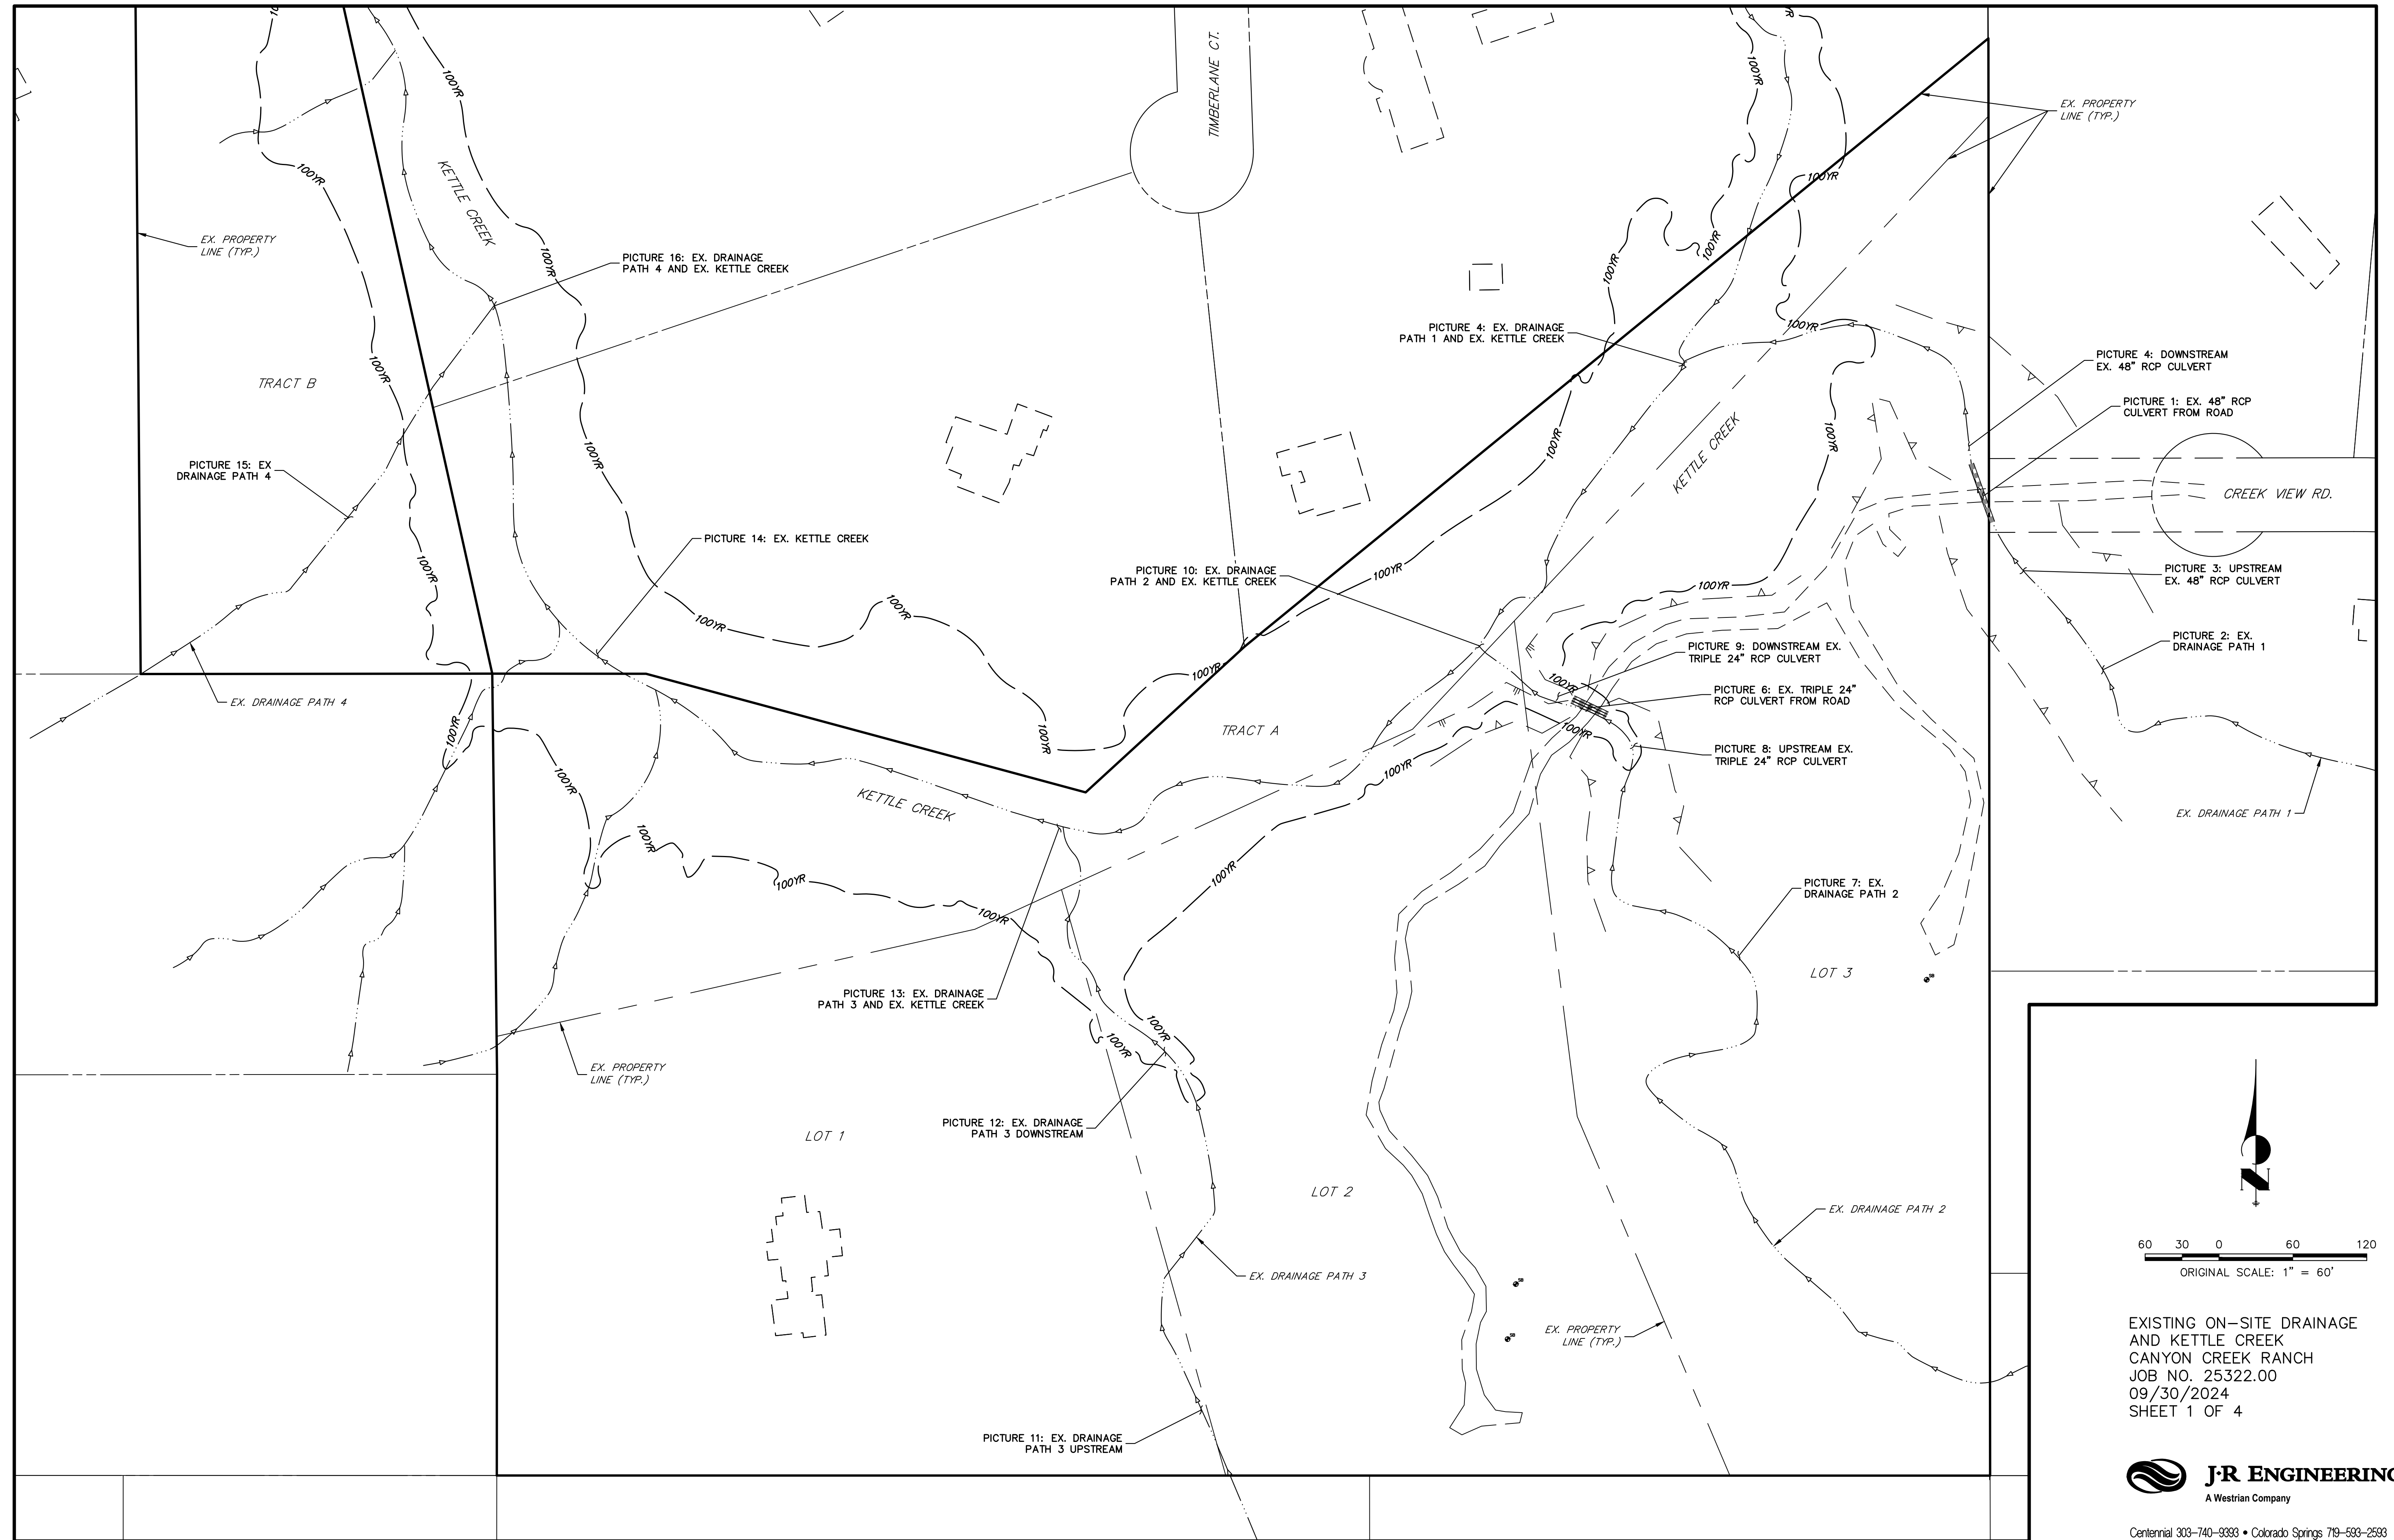

EXISTING ON-SITE DRAINAGE  
AND KETTLE CREEK  
CANYON CREEK RANCH  
JOB NO. 25322.00  
09/30/2024  
SHEET 1 OF 4



Centennial 303-740-9393 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • www.jrengineering.com

X:\25322\00\Drawings\Presentations\2532200\_Site\_Visit\_Drainage\_Exist.dwg - Picture Index - 10/1/2024 7:23:11 AM, CS



# CANYON CREEK RANCH

## EXISTING ON-SITE DRAINAGE AND KETTLE CREEK



**1. EXISTING 48' RCP CULVERT FROM ROAD**



**2. EXISTING DRAINAGE PATH 1**



**3. EXISTING 48' RCP CULVERT-UPSTREAM**



**4. EXISTING 48' RCP CULVERT-DOWNSTREAM**



**5. EXISTING DRAINAGE PATH 1 AT CONFLUENCE WITH KETTLE CREEK**



**6. EXISTING TRIPLE 24' RCP CULVERT FROM ROAD**

### **NOTES**

1. PHOTOS PROVIDED FROM A SITE VISIT CONDUCTED BY JR ENGINEERING ON SEPTEMBER 30, 2024

EXISTING ON-SITE DRAINAGE  
AND KETTLE CREEK  
CANYON CREEK RANCH  
JOB NO. 25322.00  
09/30/2024  
SHEET 2 OF 4

 **J-R ENGINEERING**  
A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • [www.jrengineering.com](http://www.jrengineering.com)

X:\25322000\Drawings\Presentations\2532200\_Site\_Visit\_Drainage\_Exist.dwg, Pictures 1-6, 10/1/2024, 7:23:12 AM, CS



# CANYON CREEK RANCH

## EXISTING ON-SITE DRAINAGE AND KETTLE CREEK



**7. EXISTING DRAINAGE PATH 2**



**8. EXISTING TRIPLE 24' RCP CULVERT-UPSTREAM**



**9. EXISTING TRIPLE 24' RCP CULVERT-DOWNSTREAM**



**10. EXISTING DRAINAGE PATH 2 AT CONFLUENCE WITH KETTLE CREEK**



**11. EXISTING DRAINAGE PATH 3-UPSTREAM**



**12. EXISTING DRAINAGE PATH 3-DOWNSTREAM**

### NOTES

1. PHOTOS PROVIDED FROM A SITE VISIT CONDUCTED BY JR ENGINEERING ON SEPTEMBER 30, 2024

EXISTING ON-SITE DRAINAGE  
AND KETTLE CREEK  
CANYON CREEK RANCH  
JOB NO. 25322.00  
09/30/2024  
SHEET 3 OF 4

 **J-R ENGINEERING**  
A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • [www.jrengineering.com](http://www.jrengineering.com)

X:\25322000\Drawings\Presentations\2532200\_Site\_Visit\_Drainage\_Enhancement\_Pictures\_P1-12\_10/1/2024\_7:23:16 AM\_CS



# CANYON CREEK RANCH

## EXISTING ON-SITE DRAINAGE AND KETTLE CREEK



**13. EXISTING DRAINAGE PATH 3 AT CONFLUENCE WITH KETTLE CREEK**



**14. EXISTING KETTLE CREEK**



**15. EXISTING DRAINAGE PATH 4**



**16. EXISTING DRAINAGE PATH 4 AT CONFLUENCE WITH KETTLE CREEK**

### NOTES

1. PHOTOS PROVIDED FROM A SITE VISIT CONDUCTED BY JR ENGINEERING ON SEPTEMBER 30, 2024

EXISTING ON-SITE DRAINAGE  
AND KETTLE CREEK  
CANYON CREEK RANCH  
JOB NO. 25322.00  
09/30/2024  
SHEET 4 OF 4

 **J-R ENGINEERING**  
A Westrian Company

Centennial 303-740-9393 • Colorado Springs 719-593-2593  
Fort Collins 970-491-9888 • [www.jrengineering.com](http://www.jrengineering.com)

X:\25322000\Drawings\Presentations\2532200\_Site\_Visit\_Drainage\_Exist.dwg, Pictures 13-16, 10/1/2024, 7:23:20 AM, CS



## **Appendix E**

### **Drainage Maps**







# CANYON CREEK RANCH PROPOSED DRAINAGE MAP

BASIN SUMMARY TABLE								
Tributary Sub-basin	Area (acres)	Percent Impervious	C <sub>s</sub>	C <sub>100</sub>	t <sub>c</sub> (min)	Q <sub>s</sub> (cfs)	Q <sub>100</sub> (cfs)	
A	4.39	8%	0.13	0.39	9.0	2.4	12.2	
B	3.63	2%	0.09	0.36	12.2	1.3	8.4	
C	9.38	5%	0.11	0.37	11.2	4.0	23.2	
D	3.97	2%	0.09	0.36	11.2	1.4	9.5	
E	3.08	2%	0.09	0.36	11.4	1.1	7.3	
F	0.24	2%	0.09	0.36	14.9	0.1	0.5	
OS1	1.72	2%	0.09	0.36	15.4	0.5	3.6	
OS2	187.10	10%	0.16	0.41	-	41.0	176.0	
OS3	0.24	2%	0.09	0.36	8.7	0.1	0.7	
OS4	2.13	2%	0.09	0.36	12.1	0.7	5.0	
OS5	163.70	10%	0.16	0.41	-	42.0	178.0	
OS6	5.80	2%	0.09	0.36	15.1	1.9	12.3	
OS7	1.04	2%	0.09	0.36	7.5	0.4	2.8	
OS8	0.18	2%	0.09	0.36	7.1	0.1	0.5	


Values in RED determined from the CUHP method for basins over 100 acres. See separate CUHP calculations. Remaining calculations from the Rational Method.

DESIGN POINT		
DP	Q <sub>s</sub>	Q <sub>100</sub>
	Total	Total
O1	0.5	3.6
O2	41.0	176.0
O3	0.1	0.7
1	2.4	12.2
1.1	52.6	194.6
O4	0.7	5.0
2	1.3	8.4
2.1	2.0	12.5
2.2	53.5	199.7
O5	42.0	178.0
3	4.0	23.2
3.1	100.2	351.9
O6	1.9	12.3
4	1.4	9.5
4.1	101.7	360.0
O7	0.4	2.8
O8	0.1	0.5
5	1.1	7.3
5.1	102.3	363.6
6	0.1	0.5



Values in RED determined from the CUHP method for basins over 100 acres. See separate CUHP calculations. Remaining calculations from the Rational Method.

PBMP Summary Table		
Basins	Tributary Area (acres)	PBMP
A-D	21.37	EXCLUDED*
E-F	3.32	EXCLUDED**

\*EXCLUDED BASED ON LARGE LOT SINGLE FAMILY SITES PER ECM APP. I.7.B.5  
\*\*EXCLUDED BASED ON LAND DISTURBANCE TO UNDEVELOPED LAND THAT WILL REMAIN UNDEVELOPED PER ECM APP. I.7.B.7

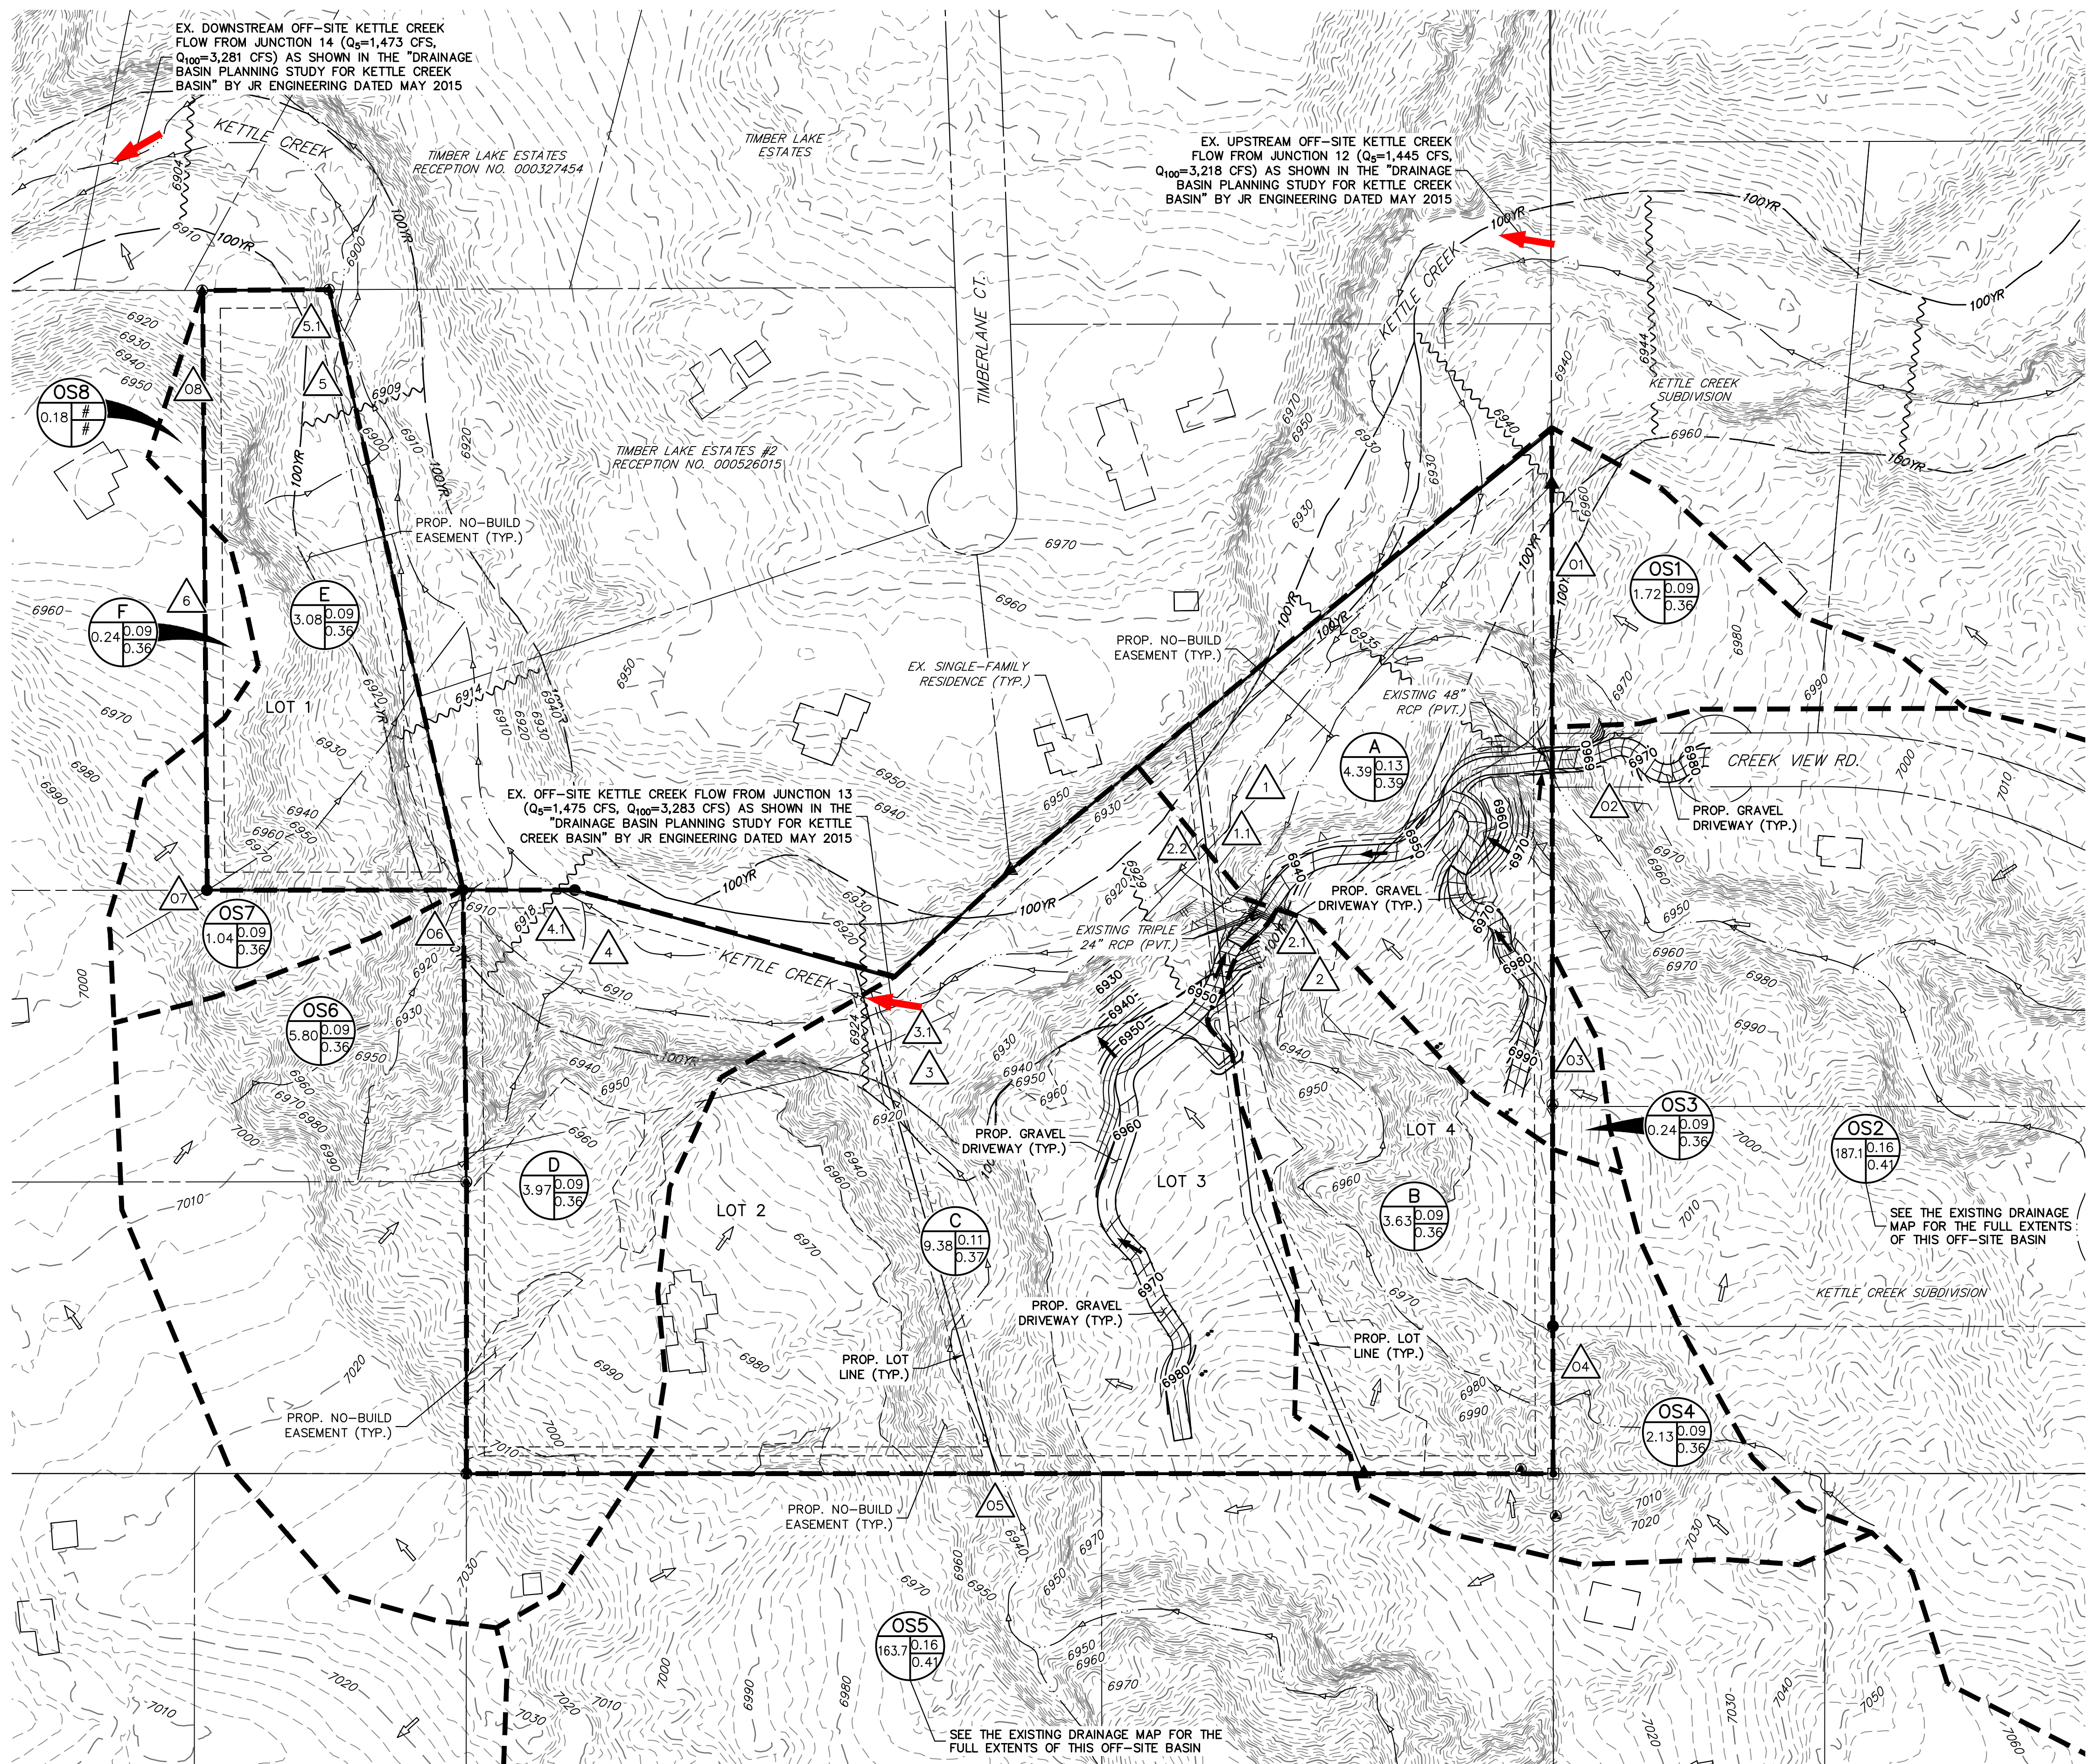



## LAYER LINETYPE LEGEND

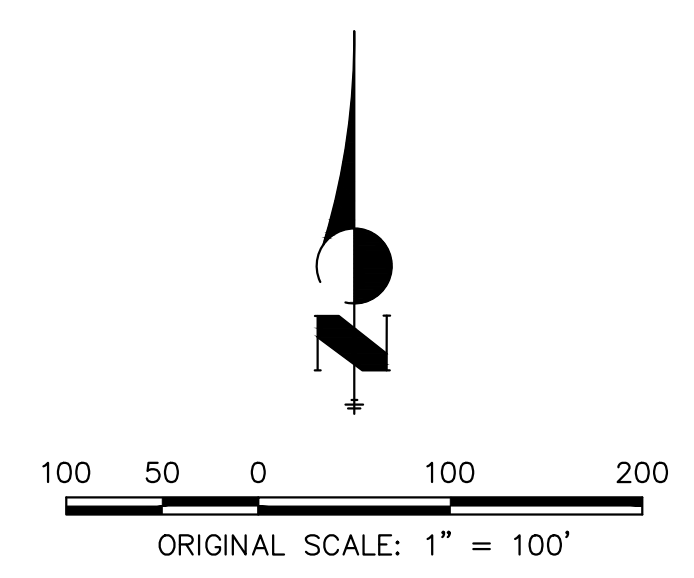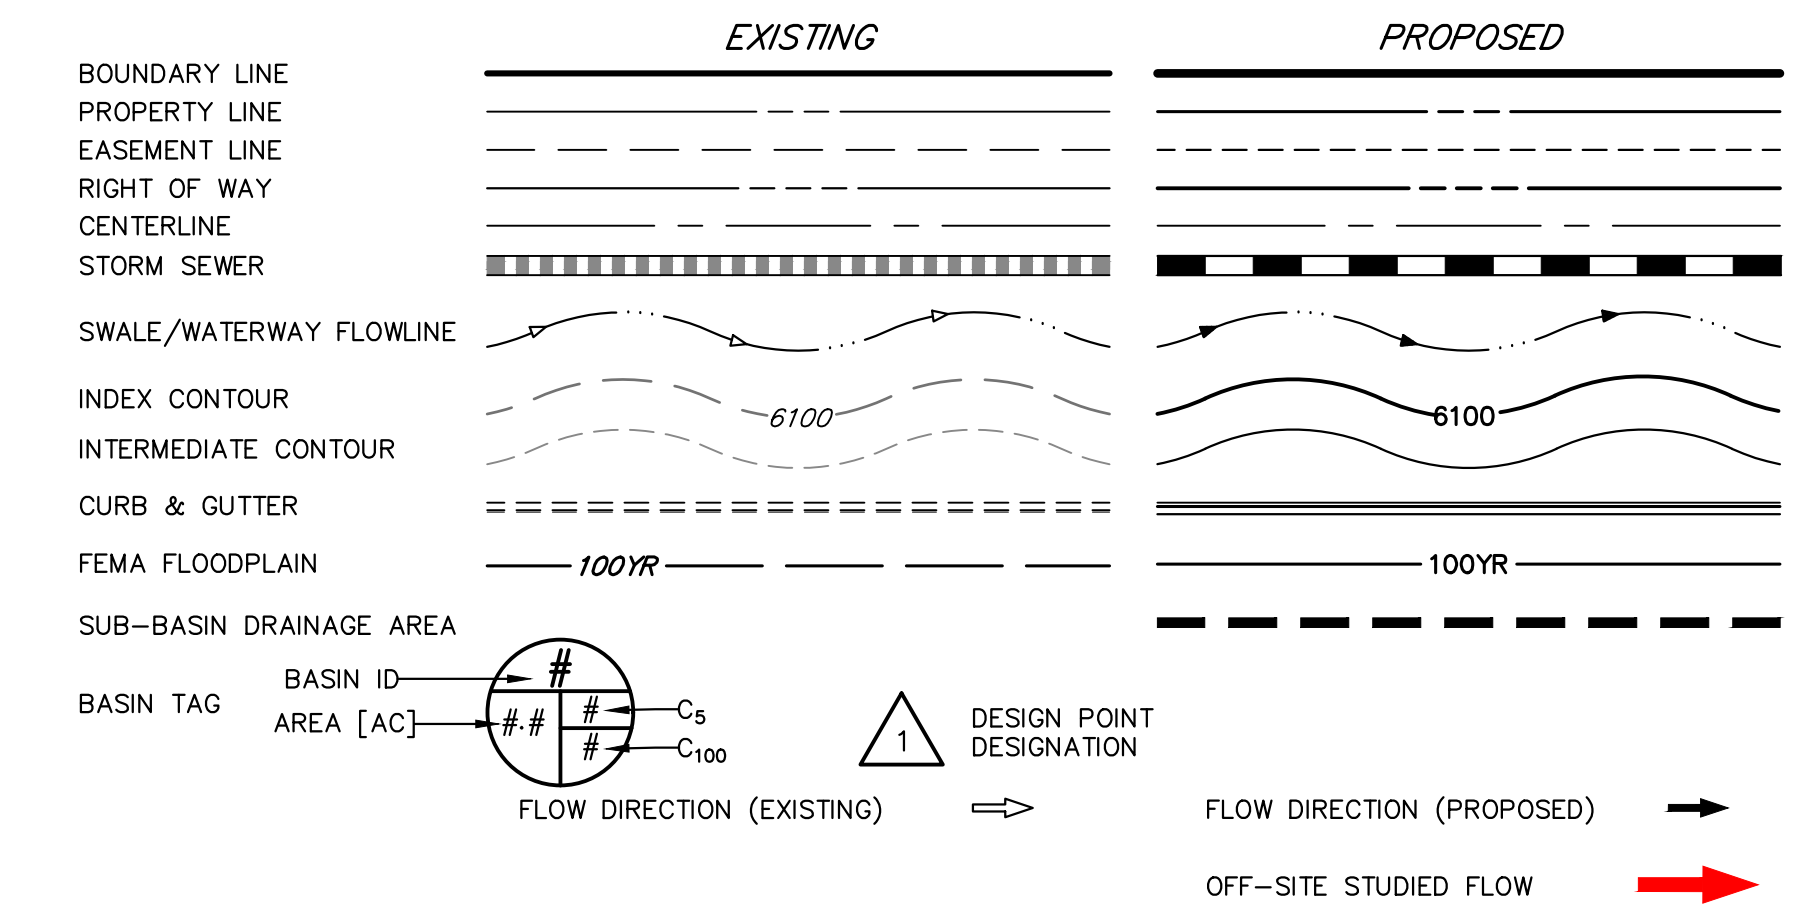

PROPOSED DRAINAGE MAP  
CANYON CREEK RANCH  
JOB NO. 25322.00  
10/10/2024  
SHEET 1 OF 1





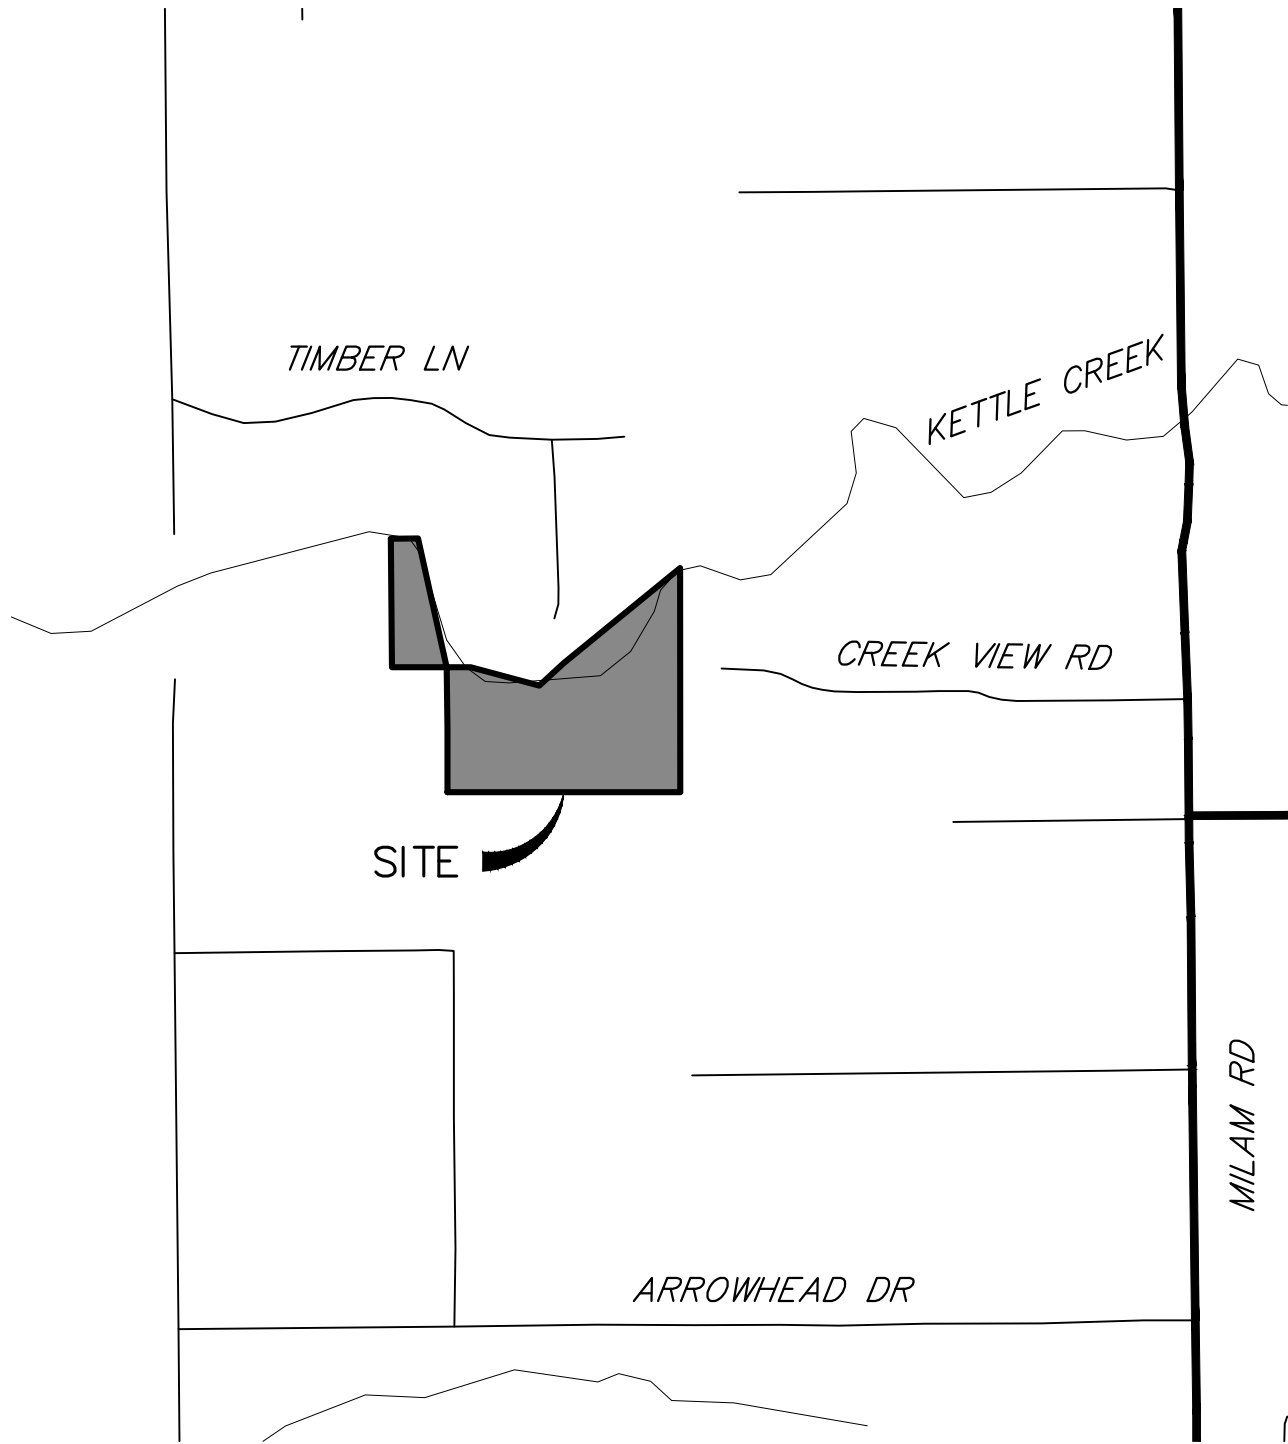

CANYON CREEK DEVELOPMENT  
 VICINITY MAP  
 2000-5322.00  
 09-26-2024  
 SHEET 1 OF 1



Centennial 303-740-9393 • Colorado Springs 719-593-2593  
 Fort Collins 970-491-9888 • [www.jrengineering.com](http://www.jrengineering.com)