


MHFD-Detention, Version 4.06 (July 2022)

Basin ID: Basin 2 & 3



7144.17


	acre-feet
	acre-feet
0.90	inches
1.20	inches
1.46	inches
1.86	inches
2.18	inches
2.52	inches
3.40	inches

Initial Surcharge Area (A_{S1}) =	user	ft ²
Surcharge Volume Length (L_{S1}) =	user	ft
Surcharge Volume Width (W_{S1}) =	user	ft
Depth of Basin Floor (H_{FLOOR}) =	user	ft
Length of Basin Floor (L_{FLOOR}) =	user	ft
Width of Basin Floor (W_{FLOOR}) =	user	ft
Area of Basin Floor (A_{FLOOR}) =	user	ft ²
Volume of Basin Floor (V_{FLOOR}) =	user	ft ³
Depth of Main Basin (H_{MAIN}) =	user	ft
Length of Main Basin (L_{MAIN}) =	user	ft
Width of Main Basin (W_{MAIN}) =	user	ft
Area of Main Basin (A_{MAIN}) =	user	ft ²
Volume of Main Basin (V_{MAIN}) =	user	ft ³
Calculated Total Basin Volume (V_{TOTAL}) =	user	acre-feet

4/10/2026, 4:44 PM

DETENTION BASIN STAGE-STORAGE TABLE BUILDER

MHFD-Detention, Version 4.06 (July 2022)

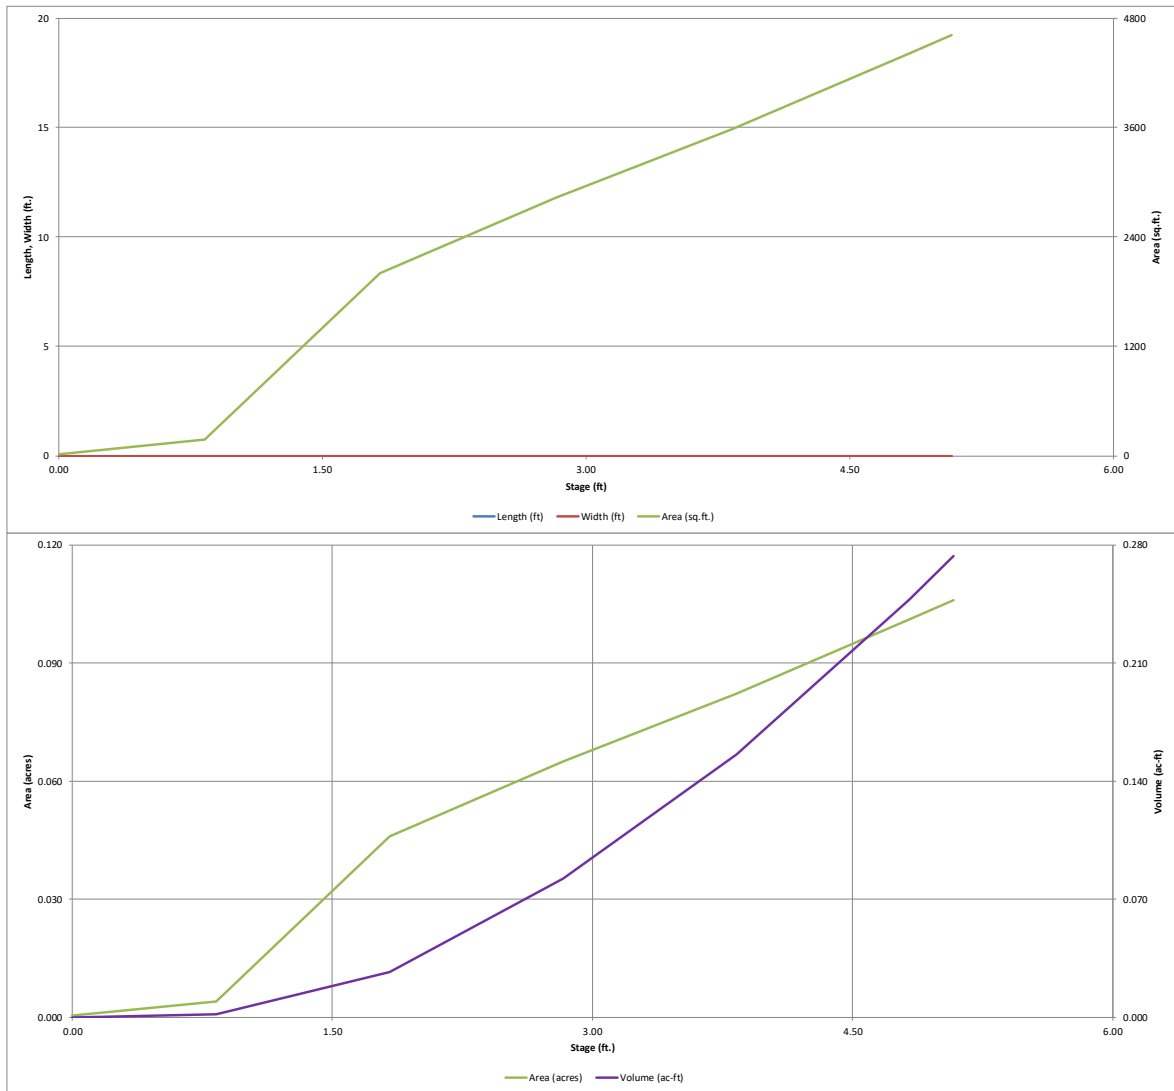


DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-DETENTION, Version 4.06 (July 2022)

Project: Ascent Church Expansion

Basin ID: Basin 2 & 3

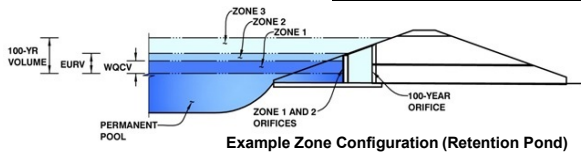

	Estimated Stage (ft)	Estimated Volume (ac-ft)	Outlet Type
Zone 1 (WQCV)	1.84	0.027	Orifice Plate
Zone 2 (EURV)	2.77	0.051	Orifice Plate
Zone 3 (100-year)	3.69	0.066	Weir&Pipe (Restrict)
Total (all zones)		0.144	

User Input: Orifice at Underdrain Outlet (typically used to drain WQCV in a Filtration BMP)

Underdrain Orifice Invert Depth = N/A ft (distance below the filtration media surface)
Underdrain Orifice Diameter = N/A inches

Calculated Parameters for Underdrain
Underdrain Orifice Area = N/A ft²
Underdrain Orifice Centroid = N/A feet

User Input: Orifice Plate with one or more orifices or Elliptical Slot Weir (typically used to drain WQCV and/or EURV in a sedimentation BMP)

Centroid of Lowest Orifice = 0.00 ft (relative to basin bottom at Stage = 0 ft)
Depth at top of Zone using Orifice Plate = 2.77 ft (relative to basin bottom at Stage = 0 ft)
Orifice Plate: Orifice Vertical Spacing = N/A inches
Orifice Plate: Orifice Area per Row = N/A sq. inches

Calculated Parameters for Plate
WQ Orifice Area per Row = N/A ft²
Elliptical Half-Width = N/A feet
Elliptical Slot Centroid = N/A feet
Elliptical Slot Area = N/A ft²

User Input: Stage and Total Area of Each Orifice Row (numbered from lowest to highest)

	Row 1 (required)	Row 2 (optional)	Row 3 (optional)	Row 4 (optional)	Row 5 (optional)	Row 6 (optional)	Row 7 (optional)	Row 8 (optional)
Stage of Orifice Centroid (ft)	0.00	1.00	1.33	1.75				
Orifice Area (sq. inches)	0.13	0.13	0.13	0.20				

	Row 9 (optional)	Row 10 (optional)	Row 11 (optional)	Row 12 (optional)	Row 13 (optional)	Row 14 (optional)	Row 15 (optional)	Row 16 (optional)
Stage of Orifice Centroid (ft)								
Orifice Area (sq. inches)								

User Input: Vertical Orifice (Circular or Rectangular)

	Not Selected	Not Selected
Invert of Vertical Orifice =	N/A	N/A
Depth at top of Zone using Vertical Orifice =	N/A	N/A
Vertical Orifice Diameter =	N/A	N/A

ft (relative to basin bottom at Stage = 0 ft)
ft (relative to basin bottom at Stage = 0 ft)
inches

Calculated Parameters for Vertical Orifice
Vertical Orifice Area = N/A ft²
Vertical Orifice Centroid = N/A feet

User Input: Overflow Weir (Dropbox with Flat or Sloped Grate and Outlet Pipe OR Rectangular/Trapezoidal Weir and No Outlet Pipe)

	Zone 3 Weir	Not Selected
Overflow Weir Front Edge Height, H _o =	3.25	N/A
Overflow Weir Front Edge Length =	2.00	N/A
Overflow Weir Grate Slope =	0.00	N/A
Horiz. Length of Weir Sides =	2.00	N/A
Overflow Grate Type =	Type C Grate	N/A
Debris Clogging % =	50%	N/A

ft (relative to basin bottom at Stage = 0 ft)
feet
H:V
feet
%
%

Calculated Parameters for Overflow Weir
Height of Grate Upper Edge, H_u = 3.25 feet
Overflow Weir Slope Length = 2.00 feet
Grate Open Area / 100-yr Orifice Area = 15.66
Overflow Grate Open Area w/o Debris = 2.78 ft²
Overflow Grate Open Area w/ Debris = 1.39 ft²

User Input: Outlet Pipe w/ Flow Restriction Plate (Circular Orifice, Restrictor Plate, or Rectangular Orifice)

	Zone 3 Restrictor	Not Selected
Depth to Invert of Outlet Pipe =	2.50	N/A
Outlet Pipe Diameter =	12.00	N/A
Restrictor Plate Height Above Pipe Invert =	3.33	

ft (distance below basin bottom at Stage = 0 ft)
inches
inches

Calculated Parameters for Outlet Pipe w/ Flow Restriction Plate
Outlet Orifice Area = 0.18 ft²
Outlet Orifice Centroid = 0.16 feet
Half-Central Angle of Restrictor Plate on Pipe = 1.11 radians

User Input: Emergency Spillway (Rectangular or Trapezoidal)

Spillway Invert Stage =	3.75	ft (relative to basin bottom at Stage = 0 ft)
Spillway Crest Length =	10.00	feet
Spillway End Slopes =	4.00	H:V
Freeboard above Max Water Surface =	1.00	feet

Calculated Parameters for Spillway
Spillway Design Flow Depth = 0.27 feet
Stage at Top of Freeboard = 5.02 feet
Basin Area at Top of Freeboard = 0.10 acres
Basin Volume at Top of Freeboard = 0.27 acre-ft




Routed Hydrograph Results

The user can override the default CUHP hydrographs and runoff volumes by entering new values in the Inflow Hydrographs table (Columns W through AF).

	WQCV	EURV	2 Year	5 Year	10 Year	25 Year	50 Year	100 Year	500 Year
Design Storm Return Period =	N/A	N/A	0.90	1.20	1.46	1.86	2.18	2.52	3.40
One-Hour Rainfall Depth (in) =	0.027	0.078	0.047	0.071	0.100	0.161	0.204	0.257	0.381
CUHP Runoff Volume (acre-ft) =	N/A	N/A	0.047	0.071	0.100	0.161	0.204	0.257	0.381
Inflow Hydrograph Volume (acre-ft) =	N/A	N/A	0.0	0.2	0.5	1.3	1.8	2.4	3.8
CUHP Predevelopment Peak Q (cfs) =	N/A	N/A							
OPTIONAL Override Predevelopment Peak Q (cfs) =	N/A	N/A							
Predevelopment Unit Peak Flow, q (cfs/acre) =	N/A	N/A	0.01	0.09	0.28	0.78	1.08	1.43	2.23
Peak Inflow Q (cfs) =	N/A	N/A	0.7	1.2	1.7	2.7	3.5	4.4	6.4
Peak Outflow Q (cfs) =	0.0	0.0	0.0	0.0	0.0	0.8	1.6	2.1	4.5
Ratio Peak Outflow to Predevelopment Q =	N/A	N/A	N/A	0.1	0.1	0.6	0.9	0.9	1.2
Structure Controlling Flow =	Plate	Plate	Plate	Plate	Plate	Overflow Weir 1	Overflow Weir 1	Outlet Plate 1	Spillway
Max Velocity through Grate 1 (fps) =	N/A	N/A	N/A	N/A	N/A	0.3	0.6	0.7	0.8
Max Velocity through Grate 2 (fps) =	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Time to Drain 97% of Inflow Volume (hours) =	38	63	50	61	72	75	73	70	65
Time to Drain 99% of Inflow Volume (hours) =	41	69	54	66	79	84	82	81	78
Maximum Ponding Depth (ft) =	1.84	2.77	2.18	2.60	3.03	3.41	3.50	3.69	3.93
Area at Maximum Ponding Depth (acres) =	0.05	0.06	0.05	0.06	0.07	0.07	0.08	0.08	0.08
Maximum Volume Stored (acre-ft) =	0.027	0.078	0.044	0.067	0.095	0.122	0.129	0.144	0.163

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.06 (July 2022)

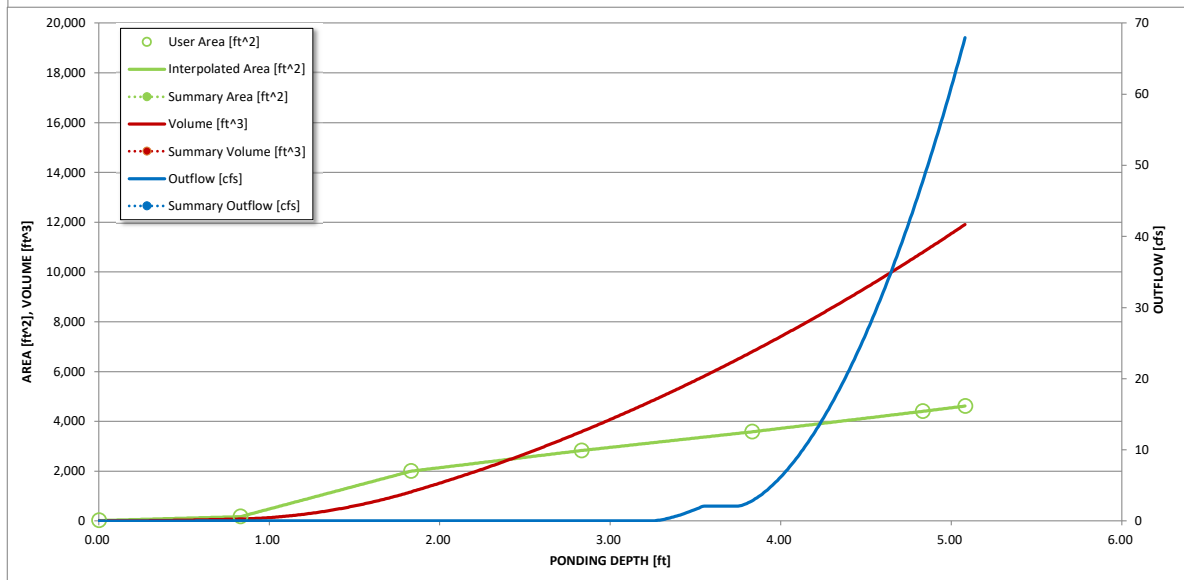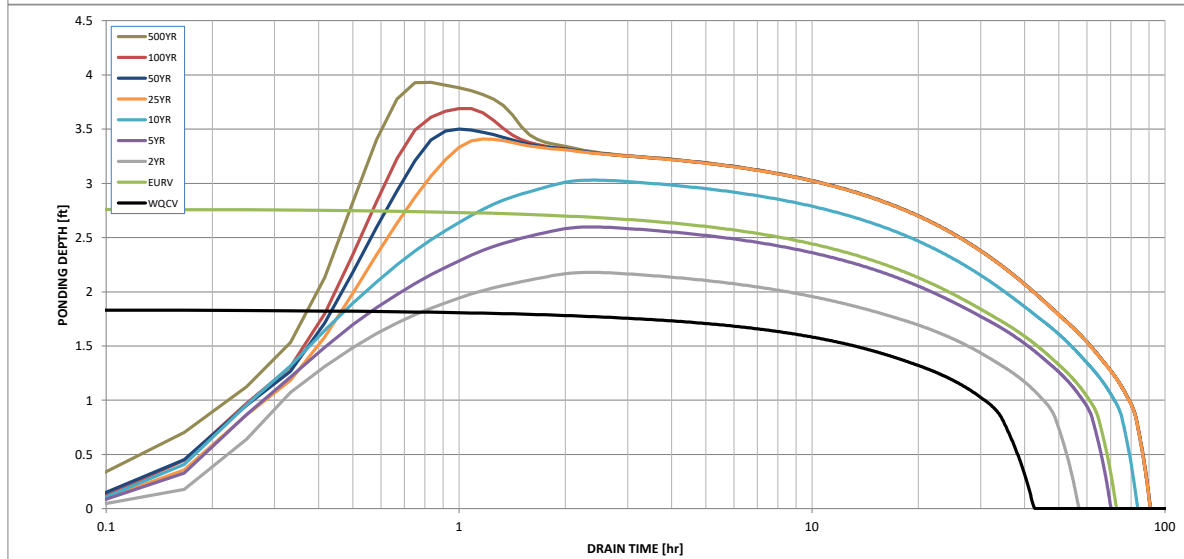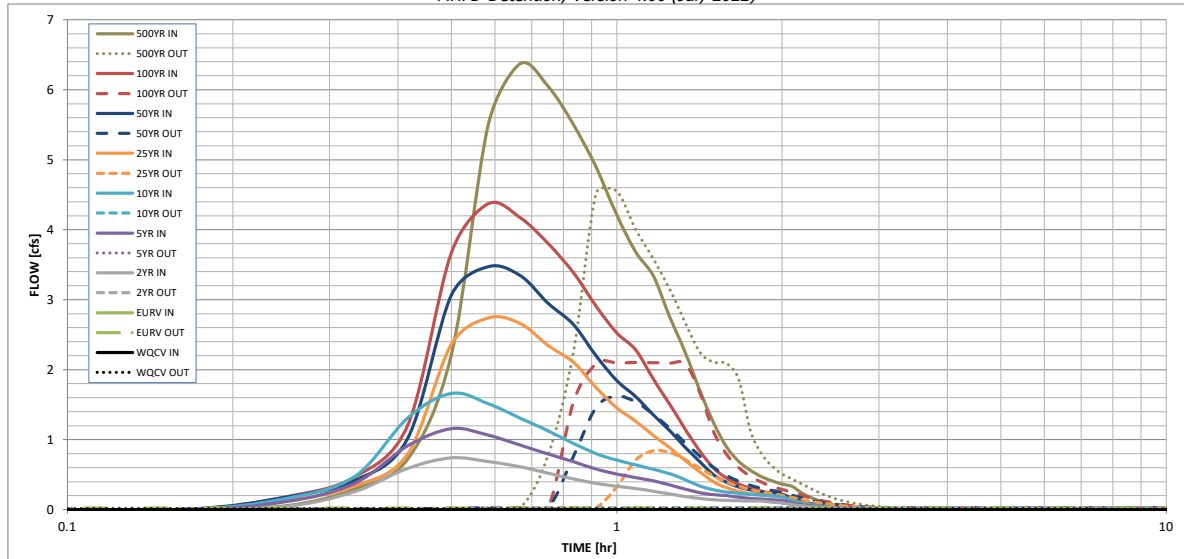

S-A-V-D Chart Axis Override	X-axis	Left Y-Axis	Right Y-Axis
minimum bound			
maximum bound			

DETENTION BASIN OUTLET STRUCTURE DESIGN

Outflow Hydrograph Workbook Filename: _____

Inflow Hydrographs

The user can override the calculated inflow hydrographs from this workbook with inflow hydrographs developed in a separate program.

	SOURCE	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP	CUHP
Time Interval	TIME	WQCV [cfs]	EURV [cfs]	2 Year [cfs]	5 Year [cfs]	10 Year [cfs]	25 Year [cfs]	50 Year [cfs]	100 Year [cfs]	500 Year [cfs]
5.00 min	0:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.06
	0:15:00	0.00	0.00	0.05	0.11	0.16	0.13	0.18	0.18	0.29
	0:20:00	0.00	0.00	0.26	0.37	0.47	0.34	0.42	0.46	0.73
	0:25:00	0.00	0.00	0.59	0.91	1.31	0.80	1.03	1.21	2.22
	0:30:00	0.00	0.00	0.74	1.16	1.66	2.36	3.07	3.67	5.50
	0:35:00	0.00	0.00	0.69	1.06	1.51	2.74	3.47	4.37	6.37
	0:40:00	0.00	0.00	0.61	0.92	1.31	2.66	3.35	4.18	6.05
	0:45:00	0.00	0.00	0.52	0.79	1.13	2.34	2.95	3.80	5.50
	0:50:00	0.00	0.00	0.44	0.69	0.95	2.11	2.65	3.39	4.90
	0:55:00	0.00	0.00	0.38	0.58	0.80	1.75	2.20	2.91	4.21
	1:00:00	0.00	0.00	0.33	0.51	0.71	1.45	1.84	2.53	3.68
	1:05:00	0.00	0.00	0.30	0.46	0.64	1.26	1.61	2.28	3.33
	1:10:00	0.00	0.00	0.26	0.41	0.58	1.06	1.35	1.86	2.74
	1:15:00	0.00	0.00	0.22	0.35	0.51	0.88	1.12	1.50	2.24
	1:20:00	0.00	0.00	0.19	0.29	0.43	0.70	0.89	1.14	1.70
	1:25:00	0.00	0.00	0.16	0.24	0.34	0.54	0.68	0.84	1.25
	1:30:00	0.00	0.00	0.14	0.21	0.28	0.40	0.50	0.59	0.90
	1:35:00	0.00	0.00	0.13	0.20	0.25	0.31	0.39	0.45	0.69
	1:40:00	0.00	0.00	0.13	0.18	0.23	0.26	0.33	0.37	0.56
	1:45:00	0.00	0.00	0.12	0.16	0.22	0.23	0.28	0.31	0.47
	1:50:00	0.00	0.00	0.12	0.15	0.21	0.21	0.25	0.26	0.41
	1:55:00	0.00	0.00	0.11	0.14	0.20	0.19	0.23	0.23	0.36
	2:00:00	0.00	0.00	0.09	0.13	0.18	0.19	0.22	0.21	0.33
	2:05:00	0.00	0.00	0.07	0.10	0.13	0.14	0.16	0.16	0.24
	2:10:00	0.00	0.00	0.05	0.07	0.10	0.10	0.12	0.11	0.18
	2:15:00	0.00	0.00	0.04	0.05	0.07	0.07	0.09	0.08	0.13
	2:20:00	0.00	0.00	0.03	0.04	0.05	0.05	0.06	0.06	0.09
	2:25:00	0.00	0.00	0.02	0.03	0.04	0.04	0.04	0.04	0.07
	2:30:00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.05
	2:35:00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.03
	2:40:00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02
	2:45:00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01
	2:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01
	2:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:05:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:10:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:15:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:20:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:25:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:30:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:35:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:40:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:45:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:50:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	5:55:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6:00:00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

DETENTION BASIN OUTLET STRUCTURE DESIGN

MHFD-Detention, Version 4.06 (July 2022)

Summary Stage-Area-Volume-Discharge Relationships

The user can create a summary S-A-V-D by entering the desired stage increments and the remainder of the table will populate automatically.

The user should graphically compare the summary S-A-V-D table to the full S-A-V-D table in the chart to confirm it captures all key transition points.

[illegible]