WASTEWATER DISPOSAL REPORT

for

SMH Consultants
Owl Ridge Subdivision

EPC Parcel #: 5100000447

February 2022 (revised August 2022) (Second revision April 2023)

Prepared By:





OWL RIDGE SUBDIVISION EPC Parcel # 5100000447

WASTEWATER DISPOSAL REPORT

February 2022 (revised August 2022) (Second revision April 2023)

Prepared for:

SMH Consultants 411 South Tejon Street Colorado Springs, CO 80903

Prepared by:

JDS-Hydro a Division of RESPEC 5540 Tech Center Drive, Suite 100 Colorado Springs, CO 80919

Table of Contents

1.0	INTRO	DDUCTION AND EXECUTIVE SUMMARY	2
		ECTED LAND USES	
	_	Projected Land Uses	
3.0		EWATER REPORT	
3.0	WASI	EWAIER REPURI	4
	3.1	Wastewater Loads	2
	3.2	On-Site Wastewater Treatment Systems (OWTS)	3

APPENDICES

Appendix A – Land Use Exhibit

Appendix B – OWTS Report

1.0 INTRODUCTION AND EXECUTIVE SUMMARY

The purpose of this report is to address the specific wastewater loads for the proposed commercial property located at Parcel # 5100000447 in El Paso County, CO.

EXECUTIVE SUMMARY: The proposed subdivision has adequate water rights, water quality, area, and soils to support the proposed two (2) lot subdivision on a 300-year basis (the third lot will be served by an exempt well on a 35-acre parcel).

2.0 PROJECTED LAND USES

2.1 Projected Land Uses

This report pertains to the existing 26.9-acre parcel that is proposed to be divided into two (2) lots. Two lots (lots #1 and #2) will be served by the proposed augmentation plan. There is an adjacent 35 acre lot with the same owner that will be served by an exempt well and will not be included in the subdivision. Please refer to the *Land Use Exhibit* in *Appendix A* depicting the proposed subdivision.

3.0 WASTEWATER REPORT

3.1 Wastewater Loads

There are three (3) residential units proposed on the subdivided property, only two (Lots #1 and #2) will be included in the proposed subdivision. There is a total of 2.35 AF/year of projected water demand for the entire two (2) lot development, 0.90 AF/year of which is projected for total household use. Each home is estimated at 0.30 AF/year/residence with three [3] total residences (Lot 1 will have one residence and one guest house) at full buildout. At an assumed 90% of household demand being sent to septic through a non-evaporative system, this equates to a total of 0.27 AF/year/SFE, or 0.81 AF/year total, to be sent to septic for treatment. This equates to a total of 723 gallons per day being sent to septic at full buildout. A breakdown of projected wastewater loads is summarized in Table 3-1.

Of the proposed lots included in the subdivision, one lot (Lot #2) already has an existing septic system, which is proposed to remain. The other lot (Lot #1 with a proposed one [2] residence and one [1] guest house) will have new septic systems constructed for each residence).

Table 3-1: Summary of Expected Water Demands & Wastewater Loads

Wat	Water (under Case Number 2021CW3126) for 2 lot augmentation plan Wastewater									
	Annual	Average		Domestic	Total Indoor,	ADF				
# of	Indoor Use	Daily	Irrigation	Watering	Watering,	(@ 90%				
SFE's	0.3	Indoor Use	0.0566	0.0125	& Irrigation	Indoor Use				
	(AF/YR/SFE)	(GPD)	(AF/1,000 SF)	(AF/Horse/Year)	(AF)	(GPD)				
	Note 1		Note 2	Note 3						
3	0.900	803	1.250	0.200	2.35	723				

- Note 1: **Per Section 8.3.1. and 8.3.2. of Case No. 2021CW3126**
- Note 2: Per 8.4.7(B)(7)(d) of the EPC-LDC, assuming a total of 22,084 ft² irrigatable land for lots #1 and #2
- Note 3: Assuming 16 horses total for lots #1 and #2 per sections 8.3.1 and 8.3.2. of Case No. 2021CW3126
 - 3.2 On-Site Wastewater Treatment Systems (OWTS)
 - 3.2 On-Site Wastewater Treatment System

The proposed single-family homes will be served by individual on-site wastewater treatment systems. The site was evaluated for *on-site wastewater treatment systems* (OWTS) by RMG Architects and Engineers in November 2021. Four (4) test pits were excavated on September 21, 2021, to a depth of 8' on the site to determine general suitability for the use of OWTS. No groundwater, bedrock, or restrictive layers were encountered in the test pits.

Laboratory testing was also performed to classify and determine the soils engineering characteristics. Long term acceptance rates (LTAR) associated with the most restrictive soils observed in the profile pits were observed to range from 0.20 to 0.80 gallons per day per square foot. This LTAR range is indicative of soil types ranging from R-1 to 4. There were no indications of seasonally shallow groundwater observed in the profile pit excavations.

Soils in the area were also classified according to four types: silty clay, sandy clay, sandy loam, and clay loam. US Soil Conservation Service identifies the site soils as follows:

- 15 Brussett loam with 3 to 5 percent slopes
- 67 Peyton sandy loam with 5 to 9 percent slopes
- 69 Peyton-Pring coupled with 8 to 15 percent slopes

Encountered soil and groundwater conditions for the site are suitable for individual treatment systems. If El Paso County Board of Health setback

requirements are met for each lot, there are no restrictions on the placement of the individual OWTS systems.

According to RMG's report, must achieve the following prior to the construction of any proposed OWTS system:

- 1) All wastewater treatment must be achieved 4' above groundwater or bedrock.
- 2) Each lot will require an OWTS report prepared according to the Regulations of the El Paso County Board of Health. As part of these regulations two (2) 8' deep test pits must be excavated in the vicinity of the proposed OWTS location.
- 3) The proposed OWTS site must comply with any physical setback requirements established by the El Paso County Department of Health and Environment (EPCHDE)
- 4) All OWTS locations must be located a minimum of any existing or proposed potable well as described in the Water Resources Report.
- 5) Each lot must be designed to ensure that a minimum of two (2) sites are appropriate for an OWTS and do not fall into any restricted areas.

The Soil, Geology, and Wastewater Study by RMG Architects and Engineers, for 18885 Brown Road, Lots 1-3 of the Owl Ridge Subdivision, dated November 15, 2021, is included in **Appendix B**.

LOT & DENSITY DATA GROSS ACREAGE: 27.00 ACRES TOTAL LOTS: 2 GROSS DENSITY: 0.074 LOTS/ACR NET DENSITY: 0.079 LOTS/ACRE NET ACREAGE: 25.33 ACRES MAXIMUM HEIGHT SERVICE PROVIDERS:
TRI-LAKES MONUMENT FIRE DEPARTMENT
MOUNTAIN VIEW ELECTRIC ASSOC.
CENTURYLINK
INDIVIDUAL SEWAGE DISPOSAL SYSTEMS
DOMESTIC WELLS
PROPANE SERVICE DENSITY AND DIMENSIONAL STANDARDS FOR RESIDENTIAL DISTRICT RR-5

WIDTH (AT FRONT FRONT FRONT REAR SIDE LOT LOT HEIGH LINE)

LINE) Manhattan, KS - HQ P: (785) 776-0541 ● Dodge City, KS P: (620) 255-1952 Kansas City, KS P: (913) 444-9615 ●Colorado Springs, CO P: (719) 465-2145 Drawn By: JTH Project 2010CS4031 DD TDS87 PCD File # MS-22-005 VICINITY MAP (NOT TO SCALE) JANUARY 2023 TOTAL ACREAGE: 1
LOT 1 = 20.33 ACRES (CLOT 2 = 5.00 ACRES TEAG STEM + 1.67 ACRES (CLOTAL = 27.00 ACRES LOTAL = 27.00 ACRES (CLOTAL = 27.00 ACRES LOTAL = 27.00 ACRES (CLOTAL = 27.00 ACRES LOTAL = 27.00 ACRES FEES: Park Fee 200 Ft OWNER:
COLT & KATHRYN HAUGEN
LIVING TRUST
18885 BROWN ROAD
COLORADO SPRINGS, CO 80908
719-440-8808 BROWN RD ZONING UTILITY NOTES:
ANY UTILITY COMPANY THAT LOCATES FACILITIES IN ANY EASEMENT SHALL HAVE THE RIGHT TO PRUNE, REMOVE, ERADICATE, CUT AND CLEAR AWAY ANY TREES, LIMBS, VINES, AND BRUSH ON THE UTILITY EASEMENT NOW OR AT ANY FUTURE TIME AND PRUNE AND CLEAR AWAY ANY TREE LIMBS, VINES, AND BRUSH ON LANDS ADJACENT TO THE UTILITY EASEMENT WHENEVER, IN THE UTILITY COMPANIES JUDGMENT, SUCH MAY INTERFERE WITH OR ENDANGER THE CONSTRUCTION, OPERATION, OR MAINTENANCE OF ITS FACILITIES, TOGETHER WITH THE RIGHT OF INGRESS TO AND EGRESS FROM THE UTILITY EASEMENT AND CONTIGUOUS LAND SUBJECT TO THIS PLAT FOR THE PURPOSE OF SURVEYING, ERECTING, CONSTRUCTION, MAINTAINING, INSPECTING, REBUILDING, REPLACING, AND WITH OR ENDANGERING THE CONSTRUCTION, OPERATION OR MAINTENANCE OF SAID FACILITIES. ENVIRONMENTAL:
DEVELOPER SHALL COMPLY WITH FEDERAL AND STATE LAWS,
REGULATIONS, ORDINANCES, REVIEW AND PERMIT REQUIREMENTS,
AND OTHER AGENCY REQUIREMENTS, IF ANY, OF APPLICABLE
AGENCIES, INCLUDING, BUT NOT LIMITED TO, THE COLORADO
DEPARTMENT OF WILDLIFE, COLORADO DEPARTMENT OF
TRANSPORTATION, U.S. ARMY CORPS OF ENGINEERS, THE U.S. FISH
& WILDLIFE SERVICE REGARDING THE ENDANGERED SPECIES ACT,
PARTICULARLY AS IT RELATES TO THE PREBLE'S MEADOW JUMPING
MOUSE AS A LISTED THREATENED SPECIES. GEOLOGIC HAZARD NOTE:
THE FOLLOWING LOTS HAVE BEEN FOUND TO BE IMPACTED BY
GEOLOGIC HAZARDS. MITIGATION MEASURES AND A MAP OF THE
HAZARD AREA CAN BE FOUND IN THE SOILS & GEOLOGY REPORT BY
RMG - ROCKY MOUNTAIN GROUP DATED SEPTEMBER 9, 2022 IN FILE
MS-22-005 AVAILABLE AT THE EL PASO COUNTY PLANNING AND
COMMUNITY DEVELOPMENT DEPARTMENT.

• OTHER HAZARD: ARTIFICIAL FILL AREA NOTICE:
ACCORDING TO COLORADO LAW YOU MUST COMMENCE ANY LEGAL
ACTION BASED UPON ANY DEFECT IN THIS SURVEY WITHIN THREE
YEARS AFTER YOU FIRST DISCOVER SUCH DEFECT. IN NO EVENT
MAY ANY ACTION BASED UPON ANY DEFECT IN THIS SURVEY BE
COMMENCED MORE THAN TEN YEARS FROM THE DATE OF
CERTIFICATION SHOWN HEREON. ACCESS: NO DRIVEWAY SHALL BE ESTABLISHED UNLESS AN ACCESS PERMIT HAS BEEN GRANTED BY EL PASO COUNTY. UNLESS OTHERWISE INDICATED, ALL SIDE, FRONT, AND REAR LOT LINES ARE HEREBY PLATTED ON EITHER SIDE WITH A 10-FOOT PUBLIC UTILITY AND DRAINAGE EASEMENT. ALL EXTERIOR SUBDIVISION BOUNDARIES ARE HEREBY PLATTED WITH A 20-FOOT PUBLIC UTILITY AND DRAINAGE EASEMENT. THE SOLE RESPONSIBILITY FOR THE MAINTENANCE OF THESE EASEMENTS IS HEREBY VESTED WITH THE INDIVIDUAL PROPERTY OWNERS. FLOODPLAIN NOTE:
FLOOD INSURANCE RATE MAP, MAP NUMBER 084041C0305G
EFFECTIVE DATE DECEMBER 7, 2018, INDICATES THAT THE AREA
WITHIN THE SURVEYED PROPERTY TO BE LOCATED IN ZONE X
(AREAS DETERMINED TO BE OUTSIDE THE 500-YEAR FLOOD PLAIN). 9. WATER IN THE DENVER WATER BASIN AQUIFERS IS ALLOCATED BASED ON A 100-YEAR AQUIFER LIFE; HOWEVER, FOR EL PASO COUNTY PLANNING PURPOSES, WATER IN THE DENVER BASIN AQUIFERS IS ELEVATED BASED ON A 300-YEAR AQUIFER LIFE. APPLICANTS, THE HOME OWNERS ASSOCIATION, AND ALL FUTURE OWNERS IN THE SUBDIVISION SHOULD BE AWARE THAT THE ECONOMIC LIFE OF A WATER SUPPLY BASED ON WELLS IN A GIVEN DENVER BASIN AQUIFER MAY BE LESS THAN EITHER THE 100 YEARS OR 300 YEARS INDICATED DUE TO ANTICIPATED WATER LEVEL DECLINES. FURTHERMORE, THE WATER SUPPLY PLAN SHOULD NOT RELY SOLELY UPON NON-RENEWABLE AQUIFERS.

ALTERNATIVE RENEWABLE WATER RESOURCES SHOULD BE ACQUIRED AND INCORPORATED IN A PERMANENT WATER SUPPLY PLAN THAT PROVIDES FUTURE GENERATIONS WITH A WATER SUPPLY. 11. ALL PROPERTY OWNERS ARE RESPONSIBLE FOR MAINTAINING PROPER STORM WATER DRAINAGE IN AND THROUGH THEIR PROPERTY. PUBLIC DRAINAGE EASEMENTS AS SPECIFICALLY NOTED ON THE PLAT SHALL BE MAINTAINED BY THE INDIVIDUAL LOT OWNERS UNLESS OTHERWISE INDICATED. HOMEBUILDERS ARE RESPONSIBLE TO ENSURE PROPER DRAINAGE AROUND STRUCTURES, INCLUDING ELEVATIONS OF FOUNDATIONS AND WINDOW WELLS IN RELATION TO SIDE-LOT DRAINAGE EASEMENTS AND SWALES. HOMEOWNERS SHALL NOT CHANGE THE GRADE OF THE LOT OR DRAINAGE SWALES WITHIN SAID EASEMENTS, AS CONSTRUCTED BY THE BUILDER, IN A MANNER THAT WOULD CAUSE ADVERSE DRAINAGE IMPACTS TO PROPERTIES. STRUCTURES, FENCES, MATERIALS OR LANDSCAPING THAT COULD IMPEDE THE FLOW OF RUNOFF SHALL NOT BE PLACED IN DRAINAGE EASEMENTS. THE FOLLOWING REPORTS HAVE BEEN SUBMITTED IN ASSOCIATION WITH THE FINAL PLAT FOR THIS SUBDIVISION AND ARE ON FILE AT THE COUNTY DEVELOPMENT SERVICE DEPARTMENT: DRAINAGE REPORT, WATER RESOURCES REPORT, WASTEWATER DISPOSAL REPORT, GEOLOGY AND SOILS REPORT, FIRE PROTECTION REPORT, AND TRAFFIC MEMO. WATER RIGHTS MAY NOT BE CONVEYED, SOLD OR TRANSFERRED PER COURT DECREE 2021CW3126 DATED FEBRUARY 8, 2022. USE OF WATER RIGHTS CAN NOT BE CHANGED FROM WHAT IS OUTLINED IN THE PRECEDING COURT DECREE. AS STATED IN COURT DECREE 2021CW3126, WELL NO. 1 IS FOR LOT 2 AND WELL NO. 2 IS FOR LOT 1. THE FOUNDATION SYSTEMS FOR THE PROPOSED SINGLE-FAMILY RESIDENTIAL STRUCTURES AND ANY RETENTION/DETENTION FACILITIES SHOULD BE DESIGNED AND CONSTRUCTED BASED UPON RECOMMENDATIONS DEVELOPED IN A SITE-SPECIFIC SUBSURFACE SOIL INVESTIGATION. BASIS OF BEARINGS IS THE WEST PROPERTY LINE, MONUMENTED AS SHOWN AND BEARING NORTH 00 DEGREES 27 MINUTES 45 SECONDS WEST, 1326.92 FEET. ACCESS TO LOTS 1& 2 SHALL BE THROUGH THE SHOWN ACCESS EASEMENT. THE RESPONSIBILITY AND MAINTENANCE OF SAID ACCESS IS SUBJECT TO THE MAINTENANCE AGREEMENT AND ALL RESTRICTIONS CONTAINED THEREIN, AS RECORDED AT RECEPTION NO.

OF THE RECORDS OF ELPASO COUNTY CLERK AND RECORDER. THE PROPERTY OWNER, ITS SUCCESSORS AND ASSIGNS, AND ALL FUTURE LOT OWNERS IN THIS DEVELOPMENT ARE HEREBY ON NOTICE THAT THEY MAY BE REQUIRED TO COMPLY WITH APPLICABLE RULES, IF ANY, OF THE COLORADO GROUND WATER COMMISSION AND/OR THE UPPER BLACK SQUIRREL CREEK GROUND WATER MANAGEMENT DISTRICT, WHICH COMPLIANCE MAY RESULT IN A REDUCTION OF WELL WITHDRAWAL LIMITS, AND THUS A REDUCTION IN WATER AVAILABILITY. THE SUBDIVIDER(S) AGREES ON BEHALF OF HIM/HERSELF AND ANY DEVELOPER OR BUILDER SUCCESSORS AND ASSIGNEES THAT SUBDIVIDER AND/OR SAID SUCCESSORS AND ASSIGNS SHALL BE REQUIRED TO PAY TRAFFIC IMPACT FEES IN ACCORDANCE WITH EL PASO COUNTY ROAD IMPACT FEE PROGRAM RESOLUTION (RESOLUTION NO. 19-471), OR ANY AMENDMENTS THERETO, AT OR PRIOR TO THE TIME OF BUILDING PERMIT SUBMITTALS. THE FEE OBLIGATION, IF NOT PAID AT FINAL PLAT RECORDING, SHALL BE DOCUMENTED ON ALL SALES DOCUMENTS AND PLAT NOTES TO ENSURE THAT A TITLE SEARCH WOULD FIND THE FEE OBLIGATION BEFORE SALE OF THE PROPERTY. ALL BUILDING SETBACK REQUIREMENTS SHALL BE DETERMINED BY THE ZONING DISTRICT, UNLESS OTHERWISE NOTED. THE ADDRESSES EXHIBITED ON THIS PLAT ARE FOR INFORMATIONAL PURPOSES ONLY. THEY ARE NOT THE LEGAL DESCRIPTION AND ARE SUBJECT TO CHANGE. THIS SURVEY DOES NOT CONSTITUTE A TITLE SEARCH BY SMH CONSULTANTS, TO DETERMINE OWNERSHIP OR EASEMENTS OF RECORD. FOR INFORMATION REGARDING EASEMENTS AND RIGHT OF WAY, SMH CONSULTANTS RELIED UPON THE TITLE POLICY PREPARED BY STEWART TITLE COMPANY dba LEGACY TITLE, 1641867, DATED APRIL 4, 2022. MAILBOXES SHALL BE INSTALLED IN ACCORDANCE WITH ALL EL PASO COUNTY DEPARTMENT OF TRANSPORTATION AND THE UNITED STATES POSTAL SERVICE REGULATIONS. SEWAGE TREATMENT IS THE RESPONSIBILITY OF EACH INDIVIDUAL PROPERTY OWNER. THE EL PASO COUNTY PUBLIC HEALTH DEPARTMENT MUST APPROVE EACH SYSTEM AND, IN SOME CASES, THE DEPARTMENT MAY REQUIRE AN ENGINEER-DESIGNED SYSTEM PRIOR TO PERMITTING APPROVAL. INDIVIDUAL LOTS SHALL CONTRIBUTE TO THE BROWN ROAD IMPROVEMENT ESCROW AGREEMENT, FOR FUTURE IMPROVEMENTS TO BROWN ROAD, AS RECORDED WITH EL PASO COUNTY CLERK AND RECORDER AT RECEPTION NO. PARENT TRACT IS RECORDED IN BOOK INSTRUMENT #219120728, REGISTER OF DEEDS OFFICE, EL PASO COUNTY, COLORADO. INDIVIDUAL LOT PURCHASERS ARE RESPONSIBLE FOR CONSTRUCTING DRIVEWAYS INCLUDING NECESSARY DRAINAGE IN ACCORDANCE WITH LAND DEVELOPMENT CODE SECTION 6.3.3.C.2 AND 6.3.3.C. DUE TO ITS LENGTH, DRIVEWAY FOR LOT 1 WILL NEED TO BE APPROVED BY THE FIRE DISTRICT AUTHORITY. DUE TO THEIR LENGTH, SOME OF THE DRIVEWAYS WILL NEED TO BE SPECIFICALLY APPROVED BY THE TRI-LAKES MONUMENT FIRE PROTECTION DISTRICT. INDIVIDUAL WELLS ARE THE RESPONSIBILITY OF EACH PROPERTY OWNER. PERMITS FOR INDIVIDUAL WELLS MUST BE OBTAINED FROM THE STATE ENGINEER WHO BY LAW HAS THE AUTHORITY TO SET CONDITIONS FOR THE ISSUANCE OF THESE PERMITS. THERE ARE NO LINES OF POSSESSION THAT AFFECT THIS SURVEY OF THE WEST HALF OF THE SOUTHWEST QUARTER OF SECTION 7, TOWNSHIP SOUTH, RANGE 65 WEST OF THE SIXTH PRINCIPAL MERIDIAN SUBDIVISIO NO GAPS OR OVERLAPS EXIST. COUNTY OF EL PASO, STATE OF COLORADO NOTES: 17. 16. 19. 21. 13. 15. 4. 9 6 Final Plat LINETYPE LEGEND SYMBOL LEGEND $\circ \, \bullet \, \triangleleft \, * \, \widehat{\bigcirc} \, \widehat{\mathbb{S}} \, \widehat{\mathbb{C}}$ S 00°05'27" E 111.65' (M) S 00°02'13" W 111.51' (R) | 5/8" STEEL PIN | W/PLASTIC | CAP MARKED PLS | #23875 | S OO°05" <u>054.13'</u> NORTH LINE OF LOT N 89°30'18" E 1669.15' (M) N 89°39'25" E 1670.01' (R) 89°17'56" W 1610.43' (M̄) 89°16'27" W 1608.91' (R) UN-PLATTED LAND LOWELL D. HAUGE ID# 5100000448 ZONED: RR-5 89°26'01" E 1680.42' (M) 89°23'54" E 1681.21' (R) E 807.42' (R, PARCEL 8" W 867.42' (C) -----2 00°32'12" E 1438.50' N 89°16'27" E 867.45' (C) -- N 89°16'27" E 807.45' (C) S 89°17'26" W 60.00' (M) S 89°16'27" W 60.00' (R) <u>615.03'</u> EYSEMENT (KEC# 504120800) EYSEMENT & NITITITY 30.00' INGRESS/EGRESS NW COR SEC 7, TLLS, R65W FND ALLOY CAPPED STEEL PIN MARKED PLS #25361 SW COR, NW 1/4 SEC 7, T11S, R65W, FND ALLOY CAPPED STEEL PIN MARKED PLS #25361 HOMAS D. KIRK ID #5100000511 ZONED: RR-5 S 00°27'26" E 944.10' (R) (M) '01.445" E 944.10° (M) KRYMYNG HOBEE MEM IBBINGLE) 60D NAIL (M) '21.7251 W '327.15' (M) 1325.38° (M) (M) 80.7201 W "24'72°00 N W "92'72°00 N (M) '62.4862 W "96'72°00 N (A) '62.4862 W "92'72°00 N N 00°27'54" W 1326.31' (M) N 00°07'55" W 1326.90' (R) N 00°27'26" W 2652.53' (M) (BASIS OF BEARING) (M) '26.6281 W "34'72°00 N* N 00°27'45" W 269.84' (M) N 00°27'26" W 270.00' (R) **UN-PLATTED LAND** UN-PLATTED LAND BROWN ROAD BK 211, PG 55 60.0' R/W

OWL RIDGE SUBDIVISION

PART OF THE WEST HALF OF THE SOUTHWEST QUARTER OF SECTION 7, TOWNSHIP 11 SOUTH, RANGE 65 WEST OF THE SIXTH PRINCIPAL MERIDIAN COUNTY OF EL PASO, STATE OF COLORADO

SSIONERS CERTIFICATE:	This Plat OWL RIDGE SUBDIVISION was approved for filing by the El Paso County, Colorado	day of, 2023,	subject to any notes specified hereon and any conditions included in the resolution of approval. The	dedications of land to the public streets and easements are accepted, but public improvements	thereon will not become the maintenance responsibility of El Paso County until preliminary	ordance with the requirements of the Land
BOARD OF COUNTY COMMISSIONERS CERTIFICATE:	This Plat OWL RIDGE SUBDIVISION was a	Board of County Commissioners on the	subject to any notes specified hereon and a	dedications of land to the public streets and	thereon will not become the maintenance re	acceptance of the public improvements in accordance with the requirements of the Land

KNOW ALL MEN BY THESE PRESENTS:
That the undersigned, Colt & Kathryn Haugen Living Trust, being the ow described tract of land:

Date	Date	Date
Chair, Board of County Commissioners	Director, Planning and Community Development Department	El Paso County Assessor

Beginning at Southwest Corner of the Northwest Quarter of said Section 7; thence N 00°27′25″ W 1327.15 feet along the West Line of the Northwest Quarter of said Section 7; thence S 00°32′12″ W 1438.50 feet; thence S 89°17′56″ W 555.17 feet; thence S 00°27′45″ E 944.10 feet; thence N 89°16′27″ W 807.45 feet; thence S 00°27′25″ E 270.00 feet; thence S 89°16′27″ W 867.42 feet; thence S 00°27′25″ E 270.00 feet; thence S 00°27′25″ E 270.00 feet; thence S 00°27′25″ E 270.00 feet; thence S 00°27′25″ W 1326.92 feet to the point of beginning, containing 27.0 acres.

nents and res


A tract of land in the West Half of Section 7, Township 11 South, Range 65 West of the Sixth Principal Meridian, El Paso County, Colorado described as follows:

PROPERTY DESCRIPTION:

TO WIT:

RECOF	RECORDINGS:		
STATE OF COUNTY C	STATE OF COLORADO) SS COUNTY OF EL PASO		
I hereby ce	tify that this instrume	I hereby certify that this instrument was filed for record in my office at	O'clockM.
this	day of	, 2023 A.D., and is duly recorded under Reception	orded under Recept
Number		of the records of El Paso County. State of Colorado.	tate of Colorado.

Number	of the records of El Paso County, State of Colorado.
Chuck Broerman, Recorder	
By:	200
Ochary	ਰਬੰਦ
SURVEYOR'S CERTIFICATION:	CATION:
I, Tim Sloan, a duly registered Profes	I, Tim Sloan, a duly registered Professional Land Surveyor in the State of Colorado, do hereby
certify that this plat truly and correctly	certify that this plat truly and correctly represents the results of a survey made on November 19,
2020, by me or under my direct super	2020, by me or under my direct supervision and that all monuments exist as shown hereon; that
mathematical closure errors are less t	mathematical closure errors are less than 1:10,000; and that said plat has been prepared in full
compliance with all applicable laws of	compliance with all applicable laws of the State of Colorado dealing with monuments, subdivision, or
a oldeoilage lle bae bael to paixevane	our control of long and all applicable provisions of the El Dece County I and Develorment Code

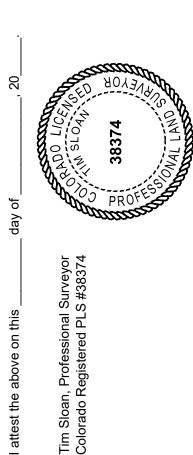

I attest the above on this

DEDICATION:

The undersigned, being all the Owners, Mortgages, Beneficiaries of Deeds of Trust and holders of other interests in the land described herein, have laid out, subdivided, and platted said lands into other interests in the land described herein, have laid out, subdivided, and platted said lands into lots and easements as shown hereon under the name and subdivision of "Owl Ridge Subdivision".

All public improvements so platted are hereby dedicated to public use and said Owner does hereby covenant and agree that the public improvements will be constructed to El Paso County standards and that proper drainage and erosion control for same will be provided at said Owner's expense, all to the satisfaction of the Board of County Commissioners of El Paso County, Colorado. Upon acceptance by resolution, all public improvements so dedicated will become matters of maintenance by El Paso County, Colorado. The utility easements shown hereon are hereby dedicated for public utilities and communication systems and other purposes as shown hereon. The entities responsible for providing the services for which the easements are established are hereby granted the perpetual right of ingress and egress from and to adjacent properties for installation, maintenance, and replacement of utility lines and related facilities.

	Θ	
	has	
	Trust, has e)	
	e aforementioned Colt & Kathryn Haugen Living Tr	0
	nagr	
ய்	Наг	
	nryn	
낊	Katl	
WITNESS WHEREOF:	olt &	
>	ζp	
SS	one	•
삇	ienti	
Ë	rem	
≥	e afc	

Colt H. Haugen, Trustee
NOTARIAL:
STATE OF COLORADO) SS COUNTY OF EL PASO)
The foregoing instrument was acknowledged before me this day of
, 2023 A.D. by Colt H. Haugen and Kathryn E. Haugen
Witness my hand and seal



VICINITY MAP (NOT TO SCALE)

					ONOLIANO
DATE SUBMITTED: 01/20/2023	REVISIONS:	4			>

Civil Engineering • Land Surveying • Landscape Architecture www.smhconsultants.com

Manhattan, KS - HQ P: (785) 776-0541 • Dodge City, KS P: (620) 255-1952

Kansas City, KS P: (913) 444-9615 • Colorado Springs, CO P: (719) 465-2145

Drawn By: ATJ Project 2010CS4031 DD TDS87 PCD File #MS-22-005

JANUARY 2023

Materials Testing
Forensic
Civil/Planning

ROCKY MOUNTAIN GROUP EMPLOYEE OWNED

SOIL, GEOLOGY, AND WASTEWATER STUDY

18885 Brown Road Lots 1-3, Owl Ridge Subdivision El Paso County, Colorado

PREPARED FOR:

SMH Consultants
411 S. Tejon Street
Suite 1
Colorado Springs, CO 80903

JOB NO. 185466

November 15, 2021

Respectfully Submitted, RMG – Rocky Mountain Group Reviewed by, RMG – Rocky Mountain Group

Kelli Zigler

Kelli Zigler Project Geologist

Tony Munger, P.E. Geotechnical Project Manager

TABLE OF CONTENTS

1.0 GENERAL SITE AND PROJECT DESCRIPTION	4
1.1 Project Location	4
1.2 Existing Land Use	4
1.3 Project Description	
2.0 QUALIFICATIONS OF PREPARERS	
3.0 STUDY OVERVIEW	
3.1 Scope and Objective	
3.2 Site Evaluation Techniques	
3.3 Additional Documents	
4.0 SITE CONDITIONS	
4.1 Existing Site Conditions	
4.2 Topography	
4.3 Vegetation	
4.4 Aerial photographs and remote-sensing imagery	
5.0 FIELD INVESTIGATION AND LABORATORY TESTING	6
5.1 Test Pit Excavations	
5.2 OWTS Visual and Tactile Evaluation	
5.3 Groundwater	
6.0 SOIL, GEOLOGY, AND ENGINEERING GEOLOGY	
6.1 Subsurface Soil Conditions	/
0.1 Substitute Soil Conditions	/
6.2 Bedrock Conditions	
6.3 U.S. Soil Conservation Service	
6.4 General Geologic Conditions	
6.5 Engineering Geology	
6.6 Structural Features	
6.7 Surficial (Unconsolidated) Deposits	
6.8 Features of Special Significance	
6.9 Drainage of Water and Groundwater	
6.10 Flooding and Surface Drainage	9
7.0 ECONOMIC MINERAL RESOURCES	
8.0 IDENTIFICATION AND MITIGATION OF POTENTIAL GEOLOGIC CONDITIONS	
8.1 Expansive Soils	
8.2 Compressible Soils	
8.3 Undocumented Fill	
8.4 Faults and Seismicity	
8.5 Radon	
9.0 ON-SITE WASTEWATER TREATMENT SYSTEMS	
10.0 BEARING OF GEOLOGIC CONDITIONS UPON PROPOSED DEVELOPMENT	
11.0 STRUCTURAL FILL - GENERAL	
12.0 ADDITIONAL STUDIES	
13.0 CONCLUSIONS	
14.0 CLOSING	16
FIGURES	
Site Vicinity Map	
Proposed Lot Layout	
USGS Topo Map	
Test Pit Logs	
USDA Soil Survey Map	
Engineering and Geology Map	
FEMA Map	7

Test Pit Location Map	8
Septic Suitability Map	
Perimeter Drain Detail	10

APPENDIX A

Additional Reference Documents

APPENDIX B

El Paso County Health Department – Sewage Disposal System Permit

1.0 GENERAL SITE AND PROJECT DESCRIPTION

1.1 Project Location

The project lies in part of the north ½ of lot 2 of the SW ¼ of Section 7, Township 11 South, Range 65 West of the 6th Principal Meridian in El Paso County, Colorado, and is generally located northwest of the intersection of Walker Road and Brown Road. The approximate location of the site is shown on the Site Vicinity Map, Figure 1.

1.2 Existing Land Use

The site currently consists of one parcel (per the El Paso County Assessor's website). It is approximately 61.55 acres. The parcel included is:

• Schedule No. 5100000447, current land use is classified as meadow hay land

The current zoning is "RR-5" - Residential Rural. The parcel is currently partially developed in the southern portion of the site where the existing residence is located.

1.3 Project Description

The site consists of approximately 61.55 acres and is partially developed. An existing two story agricultural residence is located on the southwest corner of the property. Two one-story barns are east of the residence. It is our understanding the existing 61.55 acres is to be subdivided into a total of three lots. Parcel A is to be subdivided into two lots of approximately 21.6 acres and 35 acres, respectively. Parcel B, is to retain the existing residence, well and septic, which is to encompass 5 acres. Each of the two new lots is to contain a single-family residence with well and septic. The Proposed Lot Layout is presented in Figure 2.

Each new lot will be served by an onsite wastewater treatment system (OWTS) and an individual water supply well. The site will be accessed from Brown Road.

2.0 QUALIFICATIONS OF PREPARERS

This Soil, Geology, and Wastewater Study was prepared by a professional geologist as defined by Colorado Revised Statures section 34-1-201(3) and by a qualified geotechnical engineer as defined by policy statement 15, "Engineering in Designated Natural Hazards Areas" of the Colorado State Board of Registration for Professional Engineers and Professional Land Surveyors. (Ord. 96-74; Ord. 01-42)

The principle investigators for this study are Kelli Zigler P.G., and Tony Munger, P.E. Ms. Zigler is a Professional Geologist as defined by State Statute (C.R.S 34-1-201) with over 21 years of experience in the geological and geotechnical engineering field. Ms. Kelli Zigler holds a B.S. in Geology from the University of Tulsa. Ms. Zigler has supervised and performed numerous geological and geotechnical field investigations throughout Colorado.

Tony Munger, P.E. is a licensed professional engineer with over 21 years of experience in the construction engineering (residential) field. Mr. Munger holds a B.S. in Architectural Engineering from the University of Wyoming.

3.0 STUDY OVERVIEW

The purpose of this investigation is to characterize the general geotechnical, geologic site conditions, and onsite wastewater treatment system (OWTS) feasibility and present our opinions of the potential effect of these conditions on the proposed development within El Paso County, Colorado. As such, our services exclude evaluation of the environmental and/or human, health related work products or recommendations previously prepared, by others, for this project.

Revisions to the conclusions presented in this report may be issued based upon submission of the Development Plan. This study has been prepared in accordance with the requirements outlined in the El Paso County Land Development Code (LDC) specifically Chapter 8, last updated August 27, 2019. Applicable sections include 8.4.8 and 8.4.9, and the El Paso County Engineering Criteria Manual (ECM), specifically Appendix C last updated July 9, 2019.

3.1 Scope and Objective

The scope of this study is to include a physical reconnaissance of the site and a review of pertinent, publically available documents including, but not limited to, previous geologic and geotechnical reports, overhead and remote sensing imagery, published geology and/or hazard maps, design documents, etc.

The objectives of our study are to:

- Identify geologic conditions present on the site
- Analyze potential negative impacts of these conditions on the proposed site development
- Analyze potential negative impacts to surrounding properties and/or public services resulting from the proposed site development as it relates to existing geologic conditions
- Provide our opinion of suitable techniques that may be utilized to mitigate any potential negative impacts identified herein

This report presents the findings of the study performed by RMG-Rocky Mountain Group relating to the geologic conditions of the above-referenced site. Revisions and modifications to this report may be issued subsequently by RMG, based upon:

- Additional observations made during grading and construction which may indicate conditions that require re-evaluation of some of the criteria presented in this report
- Review of pertinent documents (development plans, plat maps, drainage reports/plans, etc.) not available at the time of this study
- Comments received from the governing jurisdiction and/or their consultants subsequent to submission of this document

3.2 Site Evaluation Techniques

The information included in this report has been compiled from several sources, including:

- Field reconnaissance
- Geologic and topographic maps
- Review of selected publicly available, pertinent engineering reports
- Available aerial photographs
- Subsurface exploration

- Visual and tactile characterization of representative site soil and rock samples
- Geologic research and analysis
- Site development concept plans prepared by SMH Consultants

Geophysical investigations were not considered necessary for characterization of the site geology. Monitoring programs, which typically include instrumentation and/or observations for changes in groundwater, surface water flows, slope stability, subsidence, and similar conditions, are not known to exist and were not considered applicable for the scope of this report.

3.3 Additional Documents

Additional documents reviewed during the performance of this study are included in Appendix A.

4.0 SITE CONDITIONS

4.1 Existing Site Conditions

The site is partially developed. The site is generally located northwest of the intersection of Walker Road and Brown Road in El Paso County, Colorado and comprises approximately 61.55 acres. The site is zoned RR-5, rural residential. Adjacent properties to the north, west and east are zoned RR-5, rural residential.

4.2 Topography

Based on our site reconnaissance on September 8, 2021 and USGS 2019 topographic map of the Black Forest Quadrangle, the site generally slopes down from west to east with an elevation difference of approximately 70 feet across the site. There appears to be multiple irrigation ditch features that traverse the site from west to east, these can be seen in Figure 6, Engineering and Geology Map. The water levels in the irrigation ditch areas are anticipated to vary dependent upon local precipitation events.

4.3 Vegetation

Site vegetation primarily consists of native grasses and other prairie-type vegetation. Deciduous trees are scattered sparsely across the site.

4.4 Aerial photographs and remote-sensing imagery

Personnel of RMG reviewed aerial photos available through Google Earth Pro dating back to 1999, CGS surficial geologic mapping, and historical photos by <u>historicaerials.com</u> dating back to 1947. Historically, the site has remained partially developed land where the existing residence and barns are located since 1979. The parcel has remained vacant agricultural land north of the residence.

5.0 FIELD INVESTIGATION AND LABORATORY TESTING

It is our understanding the existing 61.55 acres is to be subdivided into a total of three lots. Parcel A is to be subdivided into two lots of approximately 21.6 acres and 35 acres, respectively. Parcel B (which is to encompass approximately 5 acres) is to retain the existing residence, well, and septic. Each of the two new lots is to contain a single-family residence with well and septic.

5.1 Test Pit Excavations

Four test pits were performed by RMG to explore the subsurface soils underlying the proposed on-site wastewater treatment systems. The number of test pits is in accordance with the Regulations of the El Paso County Board of Health, Chapter 8, On-site Wastewater Treatment Systems (OWTS) as required by 8.5.D.3.a.

The test pits were excavated to 8 feet below the existing ground surface. Additional information is provided in Section 9.0, On-site Disposal of Wastewater.

5.2 OWTS Visual and Tactile Evaluation

A visual and tactile evaluation, performed by RMG, is to be used in conjunction with this investigation. The soils were evaluated to determine the soils types and structure. Bedrock and restrictive layers were not encountered in the test pits. The soil descriptions of the test pit evaluation are presented in Figure 4 sheets one and two, Test Pit Logs.

5.3 Groundwater

Groundwater was not encountered in the test pits performed by RMG on September 22, 2021. No indications of redoximorhpic conditions were observed.

Fluctuations in groundwater and subsurface moisture conditions may occur due to variations in rainfall and other factors not readily apparent at this time. Development of the property and adjacent properties may also affect groundwater levels.

6.0 SOIL, GEOLOGY, AND ENGINEERING GEOLOGY

The site is located within the central portion of the Great Plains Physiographic Province. A major structural feature known as the Rampart Range Fault is located approximately 12.5 miles west of the site. The Rampart Range Fault marks the boundary between the Great Plains Physiographic Province and the Southern Rocky Mountain Province. The site exists within the southern portion of a large structural feature known as the Denver Basin. In general, the geology at the site consists of alluvium of Palmer Divide overlying the bedrock of the Upper part of the Dawson Formation. The alluvium generally consist of sandy to clayey loam, and sandy to silty clay. The upper part of the Dawson Formation is generally comprised of the arkosic sandstone, claystone, mudstone, and conglomerate and localized coal beds.

6.1 Subsurface Soil Conditions

The subsurface soils encountered in the RMG test pit excavations were classified using the United States Department of Agriculture (USDA). The on-site soils classified as silty clay, sandy clay, sandy loam, and clay loam.

The classifications shown on the logs are based upon the engineer's classification of the samples at the depths indicated. Stratification lines shown on the logs represent the approximate boundaries between material types and the actual transitions may be gradual and vary with location.

6.2 Bedrock Conditions

Bedrock (as defined by USDA Soil Structure and Grade) was not encountered in the test pit excavations performed for this investigation. In general, the bedrock (as defined by Colorado Geologic Survey) beneath the site is considered to be part of the Upper Dawson Formation – facies unit five which consists of very thick-bedded to massive, cross-bedded, light-colored arkose, pebbly arkose, and arkosic pebble conglomerate. Facies unit five also contains common beds of white to light-tan, fine- to medium-grained feldspathic, cross-bedded friable sandstone. The Dawson formation is thick-bedded to massive, generally light colored arkose, and pebbly. The sandstones are poorly sorted with high clay contents. The sandstone is generally permeable, well drained, and has good foundation characteristics. The Dawson sandstone is generally not considered a restrictive layer for OWTS.

6.3 U.S. Soil Conservation Service

The U.S. Soil Conservation Service along with United States Department of Agriculture (USDA) identifies the site soils as:

- 15 Brussett loam, 3 to 5 percent slopes. Properties of the loam include well drained soils, depth of the water table is anticipated to be greater than 80 inches, runoff is anticipated to be low, frequency of flooding and ponding is none, and landforms include hills.
- 67 Peyton sandy loam, 5 to 9 percent slopes. Properties of the sandy loam include well drained soils, depth of the water table is anticipated to be greater than 80 inches, runoff is anticipated to be medium, frequency of flooding and ponding is none, and landforms include hills.
- 69 Peyton-Pring complex, 8 to 15 percent slopes. Properties of the complex include well drained soils, depth of the water table is anticipated to be greater than 80 inches, runoff is anticipated to be medium, frequency of flooding and ponding is none, and landforms include hills.

The USDA Soils Survey Map is presented in Figure 5.

6.4 General Geologic Conditions

Based on our field observations and review of relevant geologic maps, a geologic map was prepared which identifies the geologic conditions affecting the development. The geologic conditions affecting the development are presented in the Engineering and Geology Map, Figure 6.

The site generally consists of alluvium deposits overlying sandstone bedrock. Four geologic units were mapped at the site as:

- TKda5 Dawson formation, facies unit five (early to middle(?) Eocene) The unit is dominated by very thick-bedded to massive, cross-bedded, light-colored arkose, pebbly arkose, and arkosic pebble conglomerate. Facies unit five contains common beds of white to light-tan, fine- to medium-grained feldspathic, cross-bedded friable sandstone. The unit is estimated to be about 500 feet thick in the quadrangle; the top of the unit has been removed by erosion.
- *QTa Alluvium of Palmer Divide (early? Pleistocene or Pliocene?) –* The deposits included in this oldest alluvial category include predominately sand deposits in the northwestern part of the quadrangle. The alluvium of Palmer Divide is up to 30 feet thick in the Black Forest quadrangle. The sandy deposits are composed generally of very pale-brown and pinkish-brown, fine to coarse sand interbedded with pinkish-gray to light brownish-gray pebble gravel. The sand is poorly

sorted, medium to thin bedded, thinly laminated, and composed largely of quartz grains. The sandy pebble and cobble gravel is composed largely of subangular to subrounded fragments of white or light-gray quartz, light-pink to light-red and reddish-brown feldspar, a few fragments of pink to light-red to reddish-brown granite, and rare fragments of brownish-gray Wall Mountain Tuff.

- *psw* Potentially Seasonally Wet Area.
- *af* Artificial fill Area Apparent artificial fill placed between 1955 and 1960 for the creation of multiple irrigation ditches throughout the site.

6.5 Engineering Geology

Charles Robinson and Associates (1977) have mapped two environmental engineering units at the site as:

- 1A Stable alluvium, colluvium and bedrock on flat to gentle slopes (0-5%).
- 3B Expansive and potentially expansive soil and bedrock on flat to moderate slopes (0-12%)

6.6 Structural Features

Structural features such as schistocity, folds, zones of contortion or crushing, joints, shear zones or faults were not observed on the site, in the surrounding area, or in the soil samples collected for laboratory testing.

6.7 Surficial (Unconsolidated) Deposits

Lake and pond sediments, swamp accumulations, sand dunes, marine terrace deposits, talus accumulations, creep, or slope wash were not observed on the site. Slump and slide debris were also not observed on the site.

6.8 Features of Special Significance

Features of special significance such as accelerated erosion, (advancing gully head, badlands, or cliff reentrants) were not observed on the property. Features indicating settlement or subsidence such as fissures, scarplets, and offset reference features were not observed on the study site or surrounding areas. Features indicating creep, slump, or slide masses in bedrock and surficial deposits were not observed on the property.

6.9 Drainage of Water and Groundwater

The overall topography of the site slopes down from the west to east. It is anticipated the direction of surface water and groundwater generally flow in the same direction. Groundwater was not encountered in the test pits performed for this current study and is not anticipated to affect shallow foundations. Multiple irrigation ditch features (apparently man-made) traverse the site from west to east.

6.10 Flooding and Surface Drainage

Based on our review of the Federal Emergency Management Agency (FEMA) Community Panel No. 08041C0305G and the online ArcGIS El Paso County Risk Map, the entire site lies outside of identified 100 or 500-year floodplains. The site lies in Zone X. Zone X is defined by FEMA as an area of minimal flood hazard that is determined to be outside the Special Flood Hazard Area and higher than the elevation of the 0.2-percent-annual-chance (or 500-year) flood. The FEMA Map is presented in Figure 7.

7.0 ECONOMIC MINERAL RESOURCES

Under the provision of House Bill 1529, it was made a policy by the State of Colorado to preserve for extraction commercial mineral resources located in a populous county. Review of the *El Paso Aggregate Resource Evaluation Map, Master Plan for Mineral Extraction, Map 1* indicates the site is identified as Stream Terrace Deposits. The older stream deposits contain sand, gravel, silt and clay preserved on benches or broad flat to sloping areas adjacent to streams. Extraction of the sand, gravel, silt or clay more than likely would not be considered to be economical compared to materials available elsewhere within the county.

According to the *Evaluation of Mineral and Mineral Fuel Potential of El Paso County State Mineral Lands*, the site is mapped within the southern part of the Denver Basin Coal Region. However, the area of the site has been mapped "Poor" for coal resources. The tract contains strata that may contain coal but no coal occurrences are within five miles. No metallic mineral resources have been mapped on the site. No oil and gas wells are drilled on this tract, or within two miles of it. The nearest historic coal mine sites are located around nine miles southwest of the tract in the Colorado Springs coal field. In this part of the Denver coal region, coal resources are locally present within the lower part of the Laramie Formation of Upper Cretaceous age.

8.0 IDENTIFICATION AND MITIGATION OF POTENTIAL GEOLOGIC CONDITIONS

The El Paso County Engineering Criteria Manual recognizes and delineates the difference between geologic hazards and constraints. A *geologic hazard* is one of several types of adverse geologic conditions capable of causing significant damage or loss of property and life. Geologic hazards are defined in Section C.2.2 Sub-section E.1 of the ECM. A *geologic constraint* is one of several types of adverse geologic conditions capable of limiting or restricting construction on a particular site. Geologic constraints are defined in Section C.2.2 Sub-section E.2 of the ECM (1.15 Definitions of Specific Terms and Phrases). The following geologic constraints were considered in the preparation of this report. They are not are not anticipated to pose a significant risk to the proposed development:

- Avalanches
- Debris Flow-Fans/Mudslides
- Floodplains
- Ground Subsidence
- Landslides
- Rockfall
- Ponding water
- Steeply Dipping Bedrock
- Unstable or Potentially Unstable Slopes
- Scour, Erosion, accelerated erosion along creek banks and drainage ways
- Corrosive Minerals

The following section presents the geologic conditions that have been identified on the property:

8.1 Expansive Soils

Based on the test pits performed by RMG for this investigation and our experience with similar materials in this area, the silty to sandy clay generally possess low to moderate swell potential. The Dawson formation is known to have moderate to high swell potential in some locations. It is anticipated that expansive soil/bedrock may be encountered at depths anticipated to affect residential foundations. If these materials are encountered in the excavations for the proposed residences, they can readily be mitigated with typical construction practices common to this region of El Paso County, Colorado.

Mitigation

Foundation design and construction are typically adjusted for expansive soils. Mitigation of expansive soils may include overexcavation and replacement with non-expansive structural fill. Drilled piers are not anticipated. Floor slabs bearing directly on expansive soils are expected to experience movement. Overexcavation and replacement with compacted non-expansive soils can be successful in reducing slab movement.

If expansive soils or bedrock are encountered during construction, mitigation of these expansive materials should follow the recommendations presented in a lot-specific subsurface soil investigation performed for each proposed structure.

8.2 Compressible Soils

Based on the test pits performed by RMG for this investigation and our experience with similar materials in this area, the silty to sandy clay generally possess low compressibility potential. If compressible materials are encountered in the excavations for the proposed residences, they can readily be mitigated with typical construction practices common to this region of El Paso County, Colorado.

It is unknown at this time whether the proposed single-family residences will have crawlspaces, basements or a combination of both. Foundation design and construction are typically adjusted for compressible soils.

Mitigation

Mitigation of compressible soils and bedrock are typically accomplished by overexcavation and replacement with structural fill, subexcavation and replacement with on-site moisture-conditioned soils, and/or the installation of deep foundation systems. If soft or loose soils are encountered, mitigation of compressible soils can be accomplished by overexcavation and replacement with structural fill, subexcavation and replacement with on-site moisture-conditioned soils, and/or the use of a geogrid reinforced fill.

If expansive soils or bedrock are encountered during construction, mitigation of these expansive materials should follow the recommendations presented in a lot-specific subsurface soil investigation performed for each proposed structure.

8.3 Undocumented Fill

Multiple irrigation ditches appear to be traversing the property and it is assumed that man-placed artificial fill was used to create the ditches between 1955 and 1960. The locations of the irrigation ditches are presented in the Engineering and Geology Map, Figure 6.

Mitigation

If undocumented fill is located below the proposed residences, it will require removal and replacement with structural fill that has been selected, placed, and compacted in accordance with the recommendations presented in section 11.0 Structural Fill – General of this report.

Lot-specific subsurface soil investigations performed prior to construction should consider fill depths at that time. If fill placed subsequent to this report is encountered in the lot-specific soil investigations, documentation of the fill placement and compaction should be evaluated to determine the suitability of that fill to support the proposed foundation. If no such documentation is available, that fill should also be removed and replaced.

The following section presents the geologic hazards that have been identified on the property:

8.4 Faults and Seismicity

Based on review of the Earthquake and Late Cenozoic Fault and Fold Map Server provided by CGS located at http://dnrwebmapgdev.state.co.us/CGSOnline/ and the recorded information dating back to November of 1900, Colorado Springs has not experienced a recorded earthquake with a magnitude greater than 1.6 during that period. The nearest recorded earthquakes over 1.6 occurred in December of 1995 in Manitou Springs, which experienced magnitudes ranging between 2.8 to 3.5. Additional earthquakes over 1.6 occurred between 1926 and 2001 in Woodland Park, which experienced magnitudes ranging from 2.7 to 3.3. Both of these locations are located near the Ute Pass Fault, which is greater than 10 miles from the subject site.

Earthquakes felt at this site will most likely result from minor shifting of the granite mass within the Pikes Peak Batholith, which includes pull from minor movements along faults found in the Denver basin. It is our opinion that ground motions resulting from minor earthquakes may affect structures (and the surrounding area) at this site if minor shifting were to occur.

Mitigation

The Pikes Peak Regional Building Code, 2017 Edition, indicates maximum considered earthquake spectral response accelerations of 0.185g for a short period (S_s) and 0.059g for a 1-second period (S_1). Based on the results of our experience with similar subsurface conditions, we recommend the site be classified as Site Class B, with average shear wave velocities ranging from 2,500 to 5,000 feet per second for the materials in the upper 100 feet.

8.5 Radon

"Radon Act 51 passed by Congress set the natural outdoor level of radon gas (0.4 pCi/L) as the target radon level for indoor radon levels".

Northern El Paso County and the 80908/80831 zip code in which the site is located, has an EPA assigned Radon Zone of 1. A radon Zone of 1 predicts an average indoor radon screening level greater than 0.4

pCi/L (picocuries per liter), which is above the recommended levels assigned by the EPA. *The EPA recommends corrective measures to reduce exposure to radon gas*.

All of the State of Colorado is considered EPA Zone 1 based on the information provided at https://county-radon.info/CO/El_Paso.html. Elevated hazardous levels of radon from naturally occurring sources are not anticipated at this site.

Mitigation

Radon hazards are best mitigated at the building design and construction phases. Providing increased ventilation of basements, crawlspaces, creating slightly positive pressures within structures, and sealing of joints and cracks in the foundations and below-grade walls can help mitigate radon hazards. Passive radon mitigation systems are also available.

Passive and active mitigation procedures are commonly employed in this region to effectively reduce the buildup of radon gas. Measures that can be taken after the residence is enclosed during construction include installing a blower connected to the foundation drain and sealing the joints and cracks in concrete floors and foundation walls. If the occurrence of radon is a concern, it is recommended that the residence be tested after they are enclosed and commonly utilized techniques are in place to minimize the risk.

9.0 ON-SITE WASTEWATER TREATMENT SYSTEMS

It is our understanding that On-site Wastewater Treatment Systems (OWTS) are proposed for the development. Individual well and septic systems are also proposed for the residential structures. The site was evaluated in general accordance with the El Paso Land Development Code, specifically sections 8.4.8. Four 8-foot deep test pits were performed across the site to obtain a general understanding of the soil and bedrock conditions. The Test Pits Logs are presented in Figure 4.

The United States Department of Agriculture (USDA) as discussed in section 6.3 consisted of silty clay, sandy clay, sandy loam, and clay loam. Limiting layers were not encountered in the test pits. The long term acceptance rates (LTAR) associated with the soils observed in the test pits range from 0.20 to 0.80 (soil types R-1 to 4) gallons per day per square foot. Signs of seasonal groundwater were not observed in the test pits.

Contamination of surface and subsurface water resources should not occur provided the OWTS sites are evaluated and installed according to the El Paso County Board of Health Guidelines and property maintained.

Treatment areas at a minimum, must achieve the following:

- Treatment areas must be 4 feet above groundwater or bedrock as defined by the Definitions 8.3.4 of the Regulations of the El Paso County Board of Health, Chapter 8 OWTS Regulations, most recently amended May 23, 2018;
- Each lot (after purchase but prior to construction of an OWTS) will require an OWTS report prepared per *the Regulations of the El Paso County Board of Health, Chapter 8 OWTS Regulations*. During the site reconnaissance, a minimum of two 8-foot deep test pits will need to be excavated in the vicinity of the proposed treatment area;
- Comply with any physical setback requirements of Table 7-1 of the El Paso County Department of Health and Environment (EPCHDE);

- Treatment areas are to be located a minimum 100 feet from any well (existing or proposed), including those located on adjacent properties per Table 7-2 per the EPCHDE;
- Each lot shall be designed to insure that a minimum of 2 sites are appropriate for a OWTS and do not fall within the restricted areas identified on the Engineering and Geology Map, Figure 4, (e.g. existing ponds, existing septic fields that may remain);

It is our opinion that if the EPCHDE physical setback requirements are met for each lot, there are no restrictions on the placement of the individual On-site Wastewater Systems.

Soil and groundwater conditions at the site are suitable for individual treatment systems. It should be noted that the LTAR values stated above are for the test pit locations performed for this report only. The LTAR values may change throughout the site. If an LTAR value of less than 0.35 (or soil types 3 to 5) are encountered at the time of the site specific OWTS evaluation, an "engineered system" will be required.

10.0 BEARING OF GEOLOGIC CONDITIONS UPON PROPOSED DEVELOPMENT

Geologic hazards (as described in Section 8.0 of this report) found to be present at this site include faults/seismicity and radioactivity/radon. Geologic constraints (as described in section 8.0 of this report) found to be present at this site include compressible soils, expansive soils, and undocumented fill. It is our opinion that the existing geologic and engineering conditions can be satisfactorily mitigated through proper engineering, design, and construction practices.

11.0 STRUCTURAL FILL - GENERAL

Areas to receive structural fill should have topsoil, organic material, or debris removed. The upper 6 inches of the exposed surface soils should be scarified and moisture conditioned to facilitate compaction (usually within 2 percent of the optimum moisture content) and compacted to a minimum of 95 percent of the maximum dry density as determined by the Standard Proctor test (ASTM D-698) or to a minimum of 92 percent of the maximum dry density as determined by the Modified Proctor test (ASTM D-1557) prior to placing structural fill.

Structural fill placed on slopes should be benched into the slope. Maximum bench heights should not exceed 4 feet, and bench widths should be wide enough to accommodate compaction equipment.

Structural fill shall consist of granular, non-expansive material. It should be placed in loose lifts not exceeding 8 to 12 inches, moisture conditioned to facilitate compaction (usually within 2 percent of the optimum moisture content) and compacted to a minimum of 92 percent of the maximum dry density as determined by the Modified Proctor test, ASTM D-1557. The materials should be compacted by mechanical means.

Materials used for structural fill should be approved by RMG prior to use. Structural fill should not be placed on frozen subgrade or allowed to freeze during moisture conditioning and placement.

12.0 ADDITIONAL STUDIES

The findings, conclusions and recommendations presented in this report were provided to evaluate the suitability of the site for future development. Unless indicated otherwise, the test pits, laboratory test results, conclusions and recommendations presented in this report are not intended for use for design and construction.

A lot-specific subsurface soil investigation will be required for all proposed structures including (but not limited to) residences, retaining walls and pumphouses, commercial buildings, etc.

13.0 CONCLUSIONS

Based upon our evaluation of the geologic conditions, it is our opinion that the proposed development is feasible. The geologic conditions identified are considered typical for the Front Range region of Colorado. Mitigation of geologic conditions is most effectively accomplished by avoidance. However, where avoidance is not a practical or acceptable alternative, geologic conditions should be mitigated by implementing appropriate planning, engineering, and suitable construction practices.

In addition to the previously identified mitigation alternatives, surface and subsurface drainage systems should be considered. Exterior, perimeter foundation drains should be installed around below-grade habitable or storage spaces. A typical perimeter drain detail is presented in Figure 10. Surface water should be efficiently removed from the building area to prevent ponding and infiltration into the subsurface soil.

We believe the sandy clay and silty clay will classify as Type A materials and the sandy loam and clay loam will classify as Type B materials as defined by OSHA in 29 CFR Part 1926. OSHA requires that temporary excavations made in Type A and B materials be laid back at ratios no steeper than 3/4:1 (horizontal to vertical) and 1:1 (horizontal to vertical), respectively, unless the excavation is shored and braced. Excavations deeper than 20 feet, or when water is present, should always be braced or the slope designed by a professional engineer.

Long term cut slopes in the upper soil should be limited to no steeper than 3:1 (horizontal to vertical). Flatter slopes will likely be necessary should groundwater conditions occur. It is recommended that long term fill slopes be no steeper than 3:1 (horizontal to vertical).

Revisions and modifications to the conclusions and recommendations presented in this report may be issued subsequently by RMG based upon additional observations made during grading and construction, which may indicate conditions that require re-evaluation of some of the criteria presented in this report.

It is important for the Owner(s) of the property to read and understand this report, and to carefully familiarize themselves with the geologic hazards associated with construction in this area. This report only addresses the geologic constraints contained within the boundaries of the site referenced above.


The foundation systems for the proposed single-family residential structures and any retention/detention facilities should be designed and constructed based upon recommendations developed in a site-specific subsurface soil investigation.


14.0 CLOSING

This report is for the exclusive purpose of providing geologic hazards information and preliminary geotechnical engineering recommendations. The scope of services did not include, either specifically or by implication, evaluation of wild fire hazards, environmental assessment of the site, or identification of contaminated or hazardous materials or conditions. Development of recommendations for the mitigation of environmentally related conditions, including but not limited to, biological or toxicological issues, are beyond the scope of this report. If the owner is concerned about the potential for such contamination or conditions, other studies should be undertaken.

This report has been prepared for **SMH Consultants** in accordance with generally accepted geotechnical engineering and engineering geology practices. The conclusions and recommendations in this report are based in part upon data obtained from review of available topographic and geologic maps, review of available reports of previous studies conducted in the site vicinity, a site reconnaissance, and research of available published information, soil test borings, soil laboratory testing, and engineering analyses. The nature and extent of variations may not become evident until construction activities begin. If variations then become evident, RMG should be retained to re-evaluate the recommendations of this report, if necessary.

Our professional services were performed using that degree of care and skill ordinarily exercised, under similar circumstances, by geotechnical engineers and engineering geologists practicing in this or similar localities. RMG does not warrant the work of regulatory agencies or other third parties supplying information which may have been used during the preparation of this report. No warranty, express or implied, is made by the preparation of this report. Third parties reviewing this report should draw their own conclusions regarding site conditions and specific construction techniques to be used on this project.



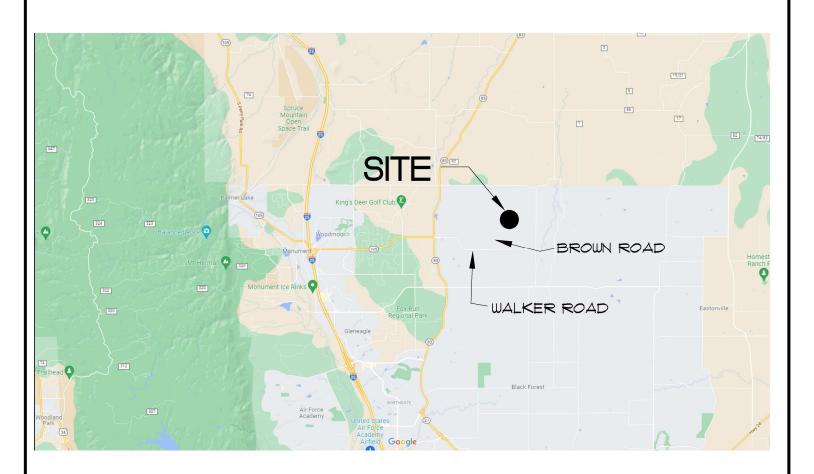





Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:


Central Office: Englewood, CO 80112 (303) 688-9475 Northern Office: Greeley / Evans, CO 80620

(970) 330-1071

SITE VICINITY MAP

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 1

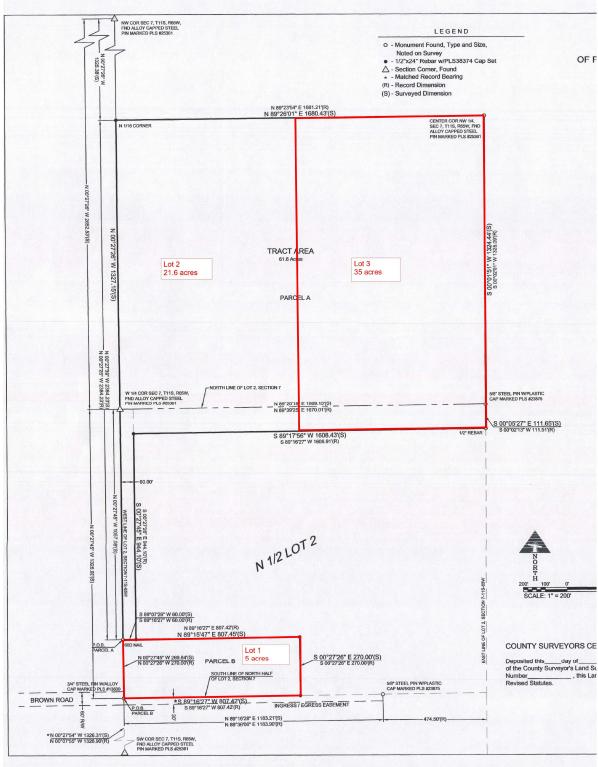






Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:
Englewood, CO 80112

(303) 688-9475 Northern Office: Greeley / Evans, CO 80620 (970) 330-1071

PROPOSED LOT LAYOUT

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 2

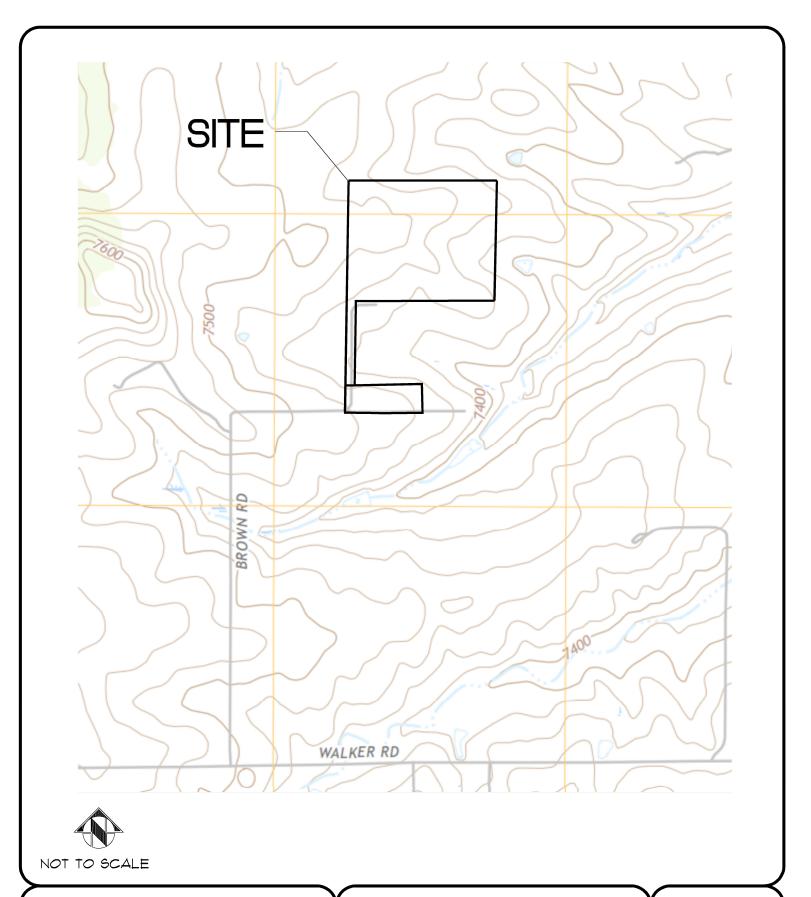



Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:

Central Office:
Englewood, CO 80112
(303) 688-9475
Northern Office:

Northern Office: Greeley / Evans, CO 80620 (970) 330-1071

USGS TOPO MAP

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 3

TEST PIT	TP-1		
DATE OBSERVE	ED: 09	/22/2	21
SOIL DESCRIPTION	ОЕРТН (FT)	SYMBOL	SOIL TYPE
0 - 8.0 FT SILTY CLAY (STRONG)	2ft ————————————————————————————————————		4

TEST PIT TP-2			
DATE OBSERVI	ED: 09	/22/2	21
SOIL DESCRIPTION	ОЕРТН (FT)	SYMBOL	SOIL TYPE
0 - 5.0 FT SANDY CLAY (STRONG)	2ft —		4
	4ft —		
5 - 8.0 FT SANDY LOAM (MODERATE)	6ft ————————————————————————————————————		

SOIL DESCRIPTIONS

SANDY CLAY



SANDY LOAM



SILTY CLAY



Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:

Central Office:
Englewood, CO 80112
(303) 688-9475
Northern Office:

Northern Office: Greeley / Evans, CO 80620 (970) 330-1071

TEST PIT LOGS

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 4

TEST PIT TP-3			
DATE OBSERVE	ED: 09	22/2	1
SOIL DESCRIPTION	DЕРТН (FT)	SYMBOL	SOIL TYPE
0 - 8.0 FT CLAY LOAM (MODERATE)	2ft ————————————————————————————————————		R-1

TEST PIT TP-4			
DATE OBSERVI	ED: 09	/22/2	21
SOIL DESCRIPTION	ОЕРТН (FT)	SYMBOL	SOIL TYPE
0 - 8.0 FT SILTY CLAY (STRONG)	2ft —		4
	4ft ——		
	6ft ————————————————————————————————————		
	8ft		

SOIL DESCRIPTIONS



CLAY LOAM



SILTY CLAY



Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:

Central Office:
Englewood, CO 80112
(303) 688-9475
Northern Office:

Northern Office: Greeley / Evans, CO 80620 (970) 330-1071

TEST PIT LOGS

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 4



15 - BRUSSETT LOAM, 3 TO 5 PERCENT SLOPES

61 - PEYTON SANDY LOAM, 5 TO 9 PERCENT SLOPES

69 - PEYTON-PRING COMPLEX, 8 TO 15 PERCENT SLOPES





Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:

Central Office:
Englewood, CO 80112
(303) 688-9475
Northern Office:
Groology / Evaps CO 80


Northern Office: Greeley / Evans, CO 80620 (970) 330-1071

USDA SOIL SURVEY MAP

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 5



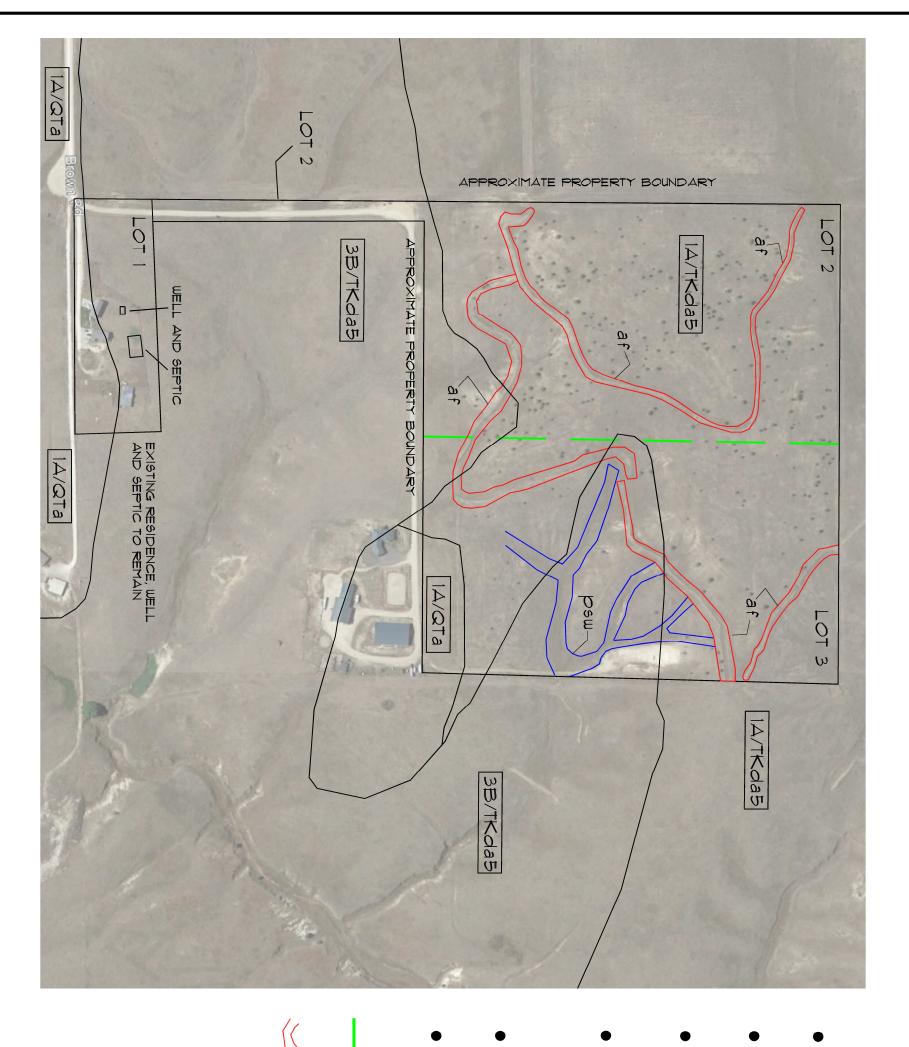

Geologic

OB No.

185466

TKda5 - Dawson Formation, facies unit three (early to middle Eocene) - Unit is estimated to be about 500 feet thick

80918 (719) 548-0600

Southern Office Colorado Springs, CO ROCKY MOUNTAIN GROUP

RMG

- QTa Alluvium of Palmer Divide (early Pleistocene or Pliocene) Unit is up to 30 feet thick
- af Artificial Fill Area Artificial fill placed between 1955 and 1960 for the creation of irrigation ditchesthroughout the property

Central Office:
Englewood, CO 80112
(303) 688-9475
Northern Office:
Greeley / Evans, CO 80620
(970) 330-1071
Woodland Park Office:
(719) 687-6077
Monument Office:
(719) 488-2145
Pueblo / Canon City:
(719) 544-7750

psw - Potentially Seasonally Wet Area

Engineering

- 1A stable alluvium, colluvium and bedrock on flat to gentle slopes (0-5%)
- 3B expansive and potentially expansive soil and bedrock on flat to moderate slopes (0-12%)

DENOTES BOUNDARY BETWEEN LOTS 2 AND 3

DENOTES ARTIFICIAL FILL

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION


SUBDIVISION

EL PASO COUNTY, COLORADO
SMH CONSULTANTS

ENGINEER: IPM CHECKED BY: II-15-2021

ENGINEERING AND GEOLOGY MAP



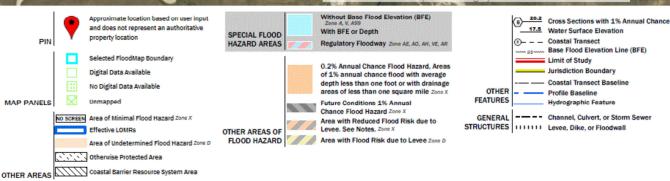





Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:
Englewood, CO 80112

Englewood, CO 80112 (303) 688-9475 Northern Office: Greeley / Evans, CO 8

Northern Office:
Greeley / Evans, CO 80620 (970) 330-1071

FEMA MAP

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 7







DENOTES APPROXIMATE LOCATION OF TEST PITS



Southern Office Colorado Springs,CO 80918 (719) 548-0600 Central Office:

Central Office:
Englewood, CO 80112
(303) 688-9475
Northern Office:

Northern Office: Greeley / Evans, CO 80620 (970) 330-1071

TEST PIT LOCATION MAP

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 8







DENOTES PROPOSED PRIMARY AND ALTERNATE SEPTIC LOCATIONS



<u>Southern Office</u>
Colorado Springs,CO
80918
(719) 548-0600
<u>Central Office:</u>
Englewood, CO 80112
(303) 688-9475


(303) 688-9475 <u>Northern Office:</u> Greeley / Evans, CO 80620

(970) 330-1071

SEPTIC SUITABILITY MAP

18885 BROWN ROAD LOTS 1-3, OWL RIDGE SUBDIVISION EL PASO COUNTY, COLORADO SMH CONSULTANTS JOB No. 185466

FIG No. 9

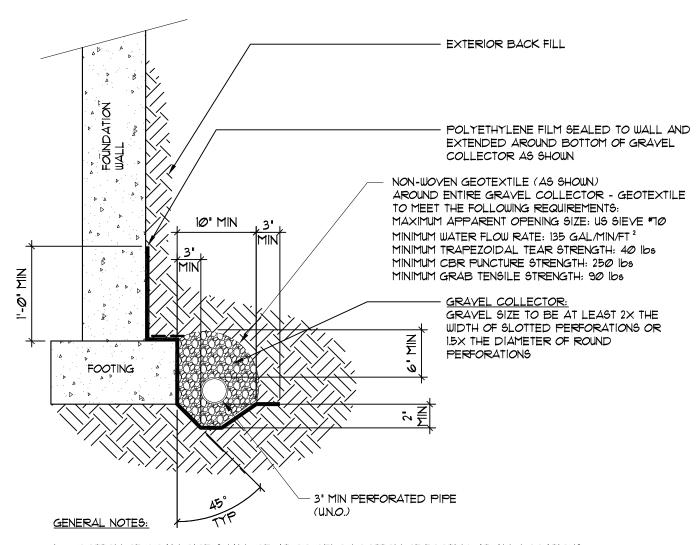

- 1. BOTTOM OF DRAIN PIPE SHALL BE AT OR BELOW BOTTOM OF FOOTING AT ALL LOCATIONS
- 2. ALL DRAIN PIPE SHALL BE PERFORATED PLASTIC, WITH THE EXCEPTION OF THE DISCHARGE PORTION WHICH SHALL BE SOLID, NON-PERFORATED PIPE.
- 3. DRAIN PIPE SHALL HAVE POSITIVE FALL THROUGHOUT.
- 4. DRAIN PIPE SHALL BE PROVIDED WITH A FREE GRAVITY OUTFALL, IF POSSIBLE. IF A GRAVITY OUTFALL CANNOT BE ACHIEVED, THEN A SUMP PIT AND PUMP SHALL BE USED. THE OUTFALL SHOULD EXTEND PAST BACKFILL ZONES AND DISCHARGE TO A LOCATION THAT IS GRADED TO DIRECT WATER OFF-SITE.
- 5. ALL DRAIN COMPONENTS SHALL BE RATED/APPROVED BY THE MANUFACTURER FOR THE INSTALLED DEPTH AND APPLICATION
- 6. DRAIN SYSTEM, INCLUDING THE OUTFALL OF THE DRAIN, SHALL BE OBSERVED BY QUALIFIED PERSONNEL PRIOR TO BACKFILLING TO VERIFY INSTALLATION.
- 1. A VERTICAL SEGMENT OF PERFORATED DRAIN PIPE, CAPPED AT THE TOP, SHALL EXTEND TO FINISH GRADE WITHIN ALL WINDOW WELLS.



Southern Office
Colorado Springs,CO
80918
(719) 548-0600
Central Office:
Englewood, CO 80112
(303) 688-9475

(303) 688-9475 <u>Northern Office:</u> Greeley / Evans, CO 80620 (970) 330-1071 PERIMETER DRAIN

FIG No. 10

APPENDIX A

Additional Reference Documents

- 1. Land Survey Plat Map, 20990 Jones Road El Paso County, Colorado, prepared by SMH Consultants, Job No. 2010CS4031, last dated November 19, 2020.
- 2. Flood Insurance Rate Map, El Paso County, Colorado and Unincorporated Areas, Community Panel No. 08041C0305G, Federal Emergency Management Agency (FEMA), effective December 7, 2018.
- 3. Geologic Map of the Black Forest Quadrangle, El Paso County, Colorado, Madole, R.F., 2003, Colorado Geological Survey Open-File Report OF03-06.
- 4. Cherry Valley and Black Forest Quadrangle, Environmental and Engineering Geologic Map for Land Use, compiled by Dale M. Cochran, Charles S. Robinson & Associates, Inc., Golden, Colorado, 1977.
- 5. Black Forest Quadrangle, Map of Potential Geologic Hazards and Surficial Deposits, compiled by Dale M. Cochran, Charles S. Robinson & Associates, Inc., Golden, Colorado, 1977.
- 6. *Pikes Peak Regional Building Department:* https://www.pprbd.org/.
- 7. El Paso County Assessor Website https://property.spatialest.com/co/elpaso/#/property/5100000447 Schedule No. 5100000447
- 8. *Colorado Geological Survey, USGS Geologic Map Viewer*: http://coloradogeologicalsurvey.org/geologic-mapping/6347-2/.
- 9. *Historical Aerials:* https://www.historicaerials.com/viewer, Images dated 1947, 1952, 1955, 1960, 1969, 1983, 1999, 2005, 2009, 2011, 2013, 2015, and 2017.
- 10. USGS Historical Topographic Map Explorer: http://historicalmaps.arcgis.com/usgs/Colorado Springs, Black Forest Quadrangle dated 1898, 1909, 1948, 1969, 1981 and 1989.
- 11. Google Earth Pro, Imagery dated 1999, 2004, 2005, 2006, 2011, 2013, 2015, 2017, 2019 and 2020.

51000000 \$13

1790		
Bu.	CITY-COUNTY HEALTH DEPARTMENT	
	COLORADO SPRINGS, COLORADO	,32
	SEMAGE DISPOSAL INSPECTION FORM	_
APPROVAL: V.A. & F.H.A. YES $ u$ NO $ u$	DATE OF INSP. 6/18/75 ENVIRONMENTALIST Krueiger	
LOCATION (STREET NUMBER	R) 18885 Brown Rd. OCCUPANT Hougen	
LEGAL DESCRIPTION	/	
CONTRACTOR	NO.OF BEDROOMS 4	
	Dre Ilina	
SYSTEM INSTALLED BY		
-	PRIMARY TREATMENT	
COMMERCIAL MFG. YE.	S SIZE 1250	
NON. COMMERCIAL	SIZE	
TYPE OF MATERIAL	NO. COMPARTMENTS GALLONS DEPTH (TOTAL) LIQ.CAP.	
MIDIH LENGIH		
DICOGCAL EITH D	SECONDARY TREATMENT	
	SOIL PERC. TEST	<u> </u>
	NES <u>254' NUMBER OF LINES 3</u> DISTANCE BETHEEN LINES // OF TILE <u>DASTE</u> TRENCH DEPTH <u>2'COME</u> TRENCH WIDTH <u>36"</u> GRADE	
	river rock DEPTH 12" UNDER TILE 6" OVER TILE 2"	
	SOIL PERC.TEST LINING MATERIAL	
	AM WORKING DEPTH TOTAL SO ST	
DISPUSAL DED LENGTH	WIDTH DEPTH TOTAL SQ.FT.	
	NORTH	
	30 PERF	
	14'802	_
	87 PERF	
	H'SOL 87 PERF	
	25	
	040	
	80'	
	φ ε.ο.	
	o co	
		1

2706

Acres	102+			
	ts _a			

Septic tank

Seepage bed

EL PASO COUNTY . COUNTY HEALTH DEPARTMENT

501 North Foote Avenue . Colorado Springs, Colorado - 475-8240

Water Supply WELL	PERMIT		(s. Receipt No
TO CONSTRUCT, ALT	ER, REPAIR OR MODIFY AN INDIVIDUAL SEWAGE DISPOSAL SYSTEM		
Issued To	Sandra Haugen	Date _	May 23.1979
Address of Property	Brown Road, Black Forest, Colomado		
	(Permit valid at this oddress only)		
Sawaga Disposal System	work to be performed by	Phone	

This Permit is issued in accordance with 25-10-106 Colorado Revised Statutes 1973, as amended, PERMIT EXPIRES upon completion-installation of sewage-disposal system or at the end of six (6) months from date of issue - whichever occurs first - (unless work is in progress),

- This Permit does not denote approval of zoning and acreage requirements. -

ft. wide.

Permit Fee	\$50.00	Director/City-Cou		th Départment	1. P. H	
November 23.1979	·	Krian		Somston		
Date of Expiration		Environmentalist				
NOTE: LEAVE ENTIRE SEWAGE-DISPOSA	L SYSTEM UNCOV	ERED FOR FINAL IN	SPECTION	ON.	560 0	
a. .					760 94	4.14.

24-HOUR ADVANCE NOTICE REQUIRED

ORft. long

36 inches wide Feet of trench <u> 24</u> inches wide Seepage pit _____ diam.

The Health Officer shall assume no responsibility in case of failure or inadequacy of a sewage-disposal system, beyond consulting in good faith with the property owner or representative. Free access to the property shall be authorized at reasonable times for the purpose of making such inspections as are necessary to determine compliance with requirements of this law. the second of th

Date <u>5/9/79</u>

EL PASO CITY-COUNTY HEALTH DEPARTMENT 501 NORTH FOOTE AVENUE COLORADO SPRINGS, COLORADO 636-0125

	emodel, or Install a Sewage Disposal System
Name of Owner Sondro Houge	Phone 495-4279
Address of Property <u>Brown</u>	
	of Nw/4 - meets & bounds
Owner's Address (if different)	Phone
Systems Contractor	Address
Type of Construction House	Address Source and Type of Water Supply WELL
Size of Lot 102 A	
	1 System will comply with all applicable Laws
HEALTH DEPA	ARTMENT USE ONLY
Permit Number	Receipt Number
Number of Bedrooms 4 Tank Capacity λ	50gallons Absorption area 760sq. Ft. 3'Trancl=253'
REMARKS	2 tunch = 380
APPLICATION IS () APPROV	VED () DENIED
ENVIRONMENTALIST Ang	DATE 5/9 19 79
PLOT PLAN WILL I	NCLUDE THE FOLLOWING
Plot plan may be drawn on the back of t	his sheet or on a seperate sheet.
l. Streams, Lakes, Ponds, Irrigation Di	tches and other Water Courses
. North Direction	6. Location of Proposed Septic System
. Location of Property Line	7. Location of percolation test
. Buildings	8. Geographical features
. Wells	9. Other Information as required

EHS - 6/9/76 - SEWAGE