


Grandview Reserve Preliminary Plan Letter of Intent

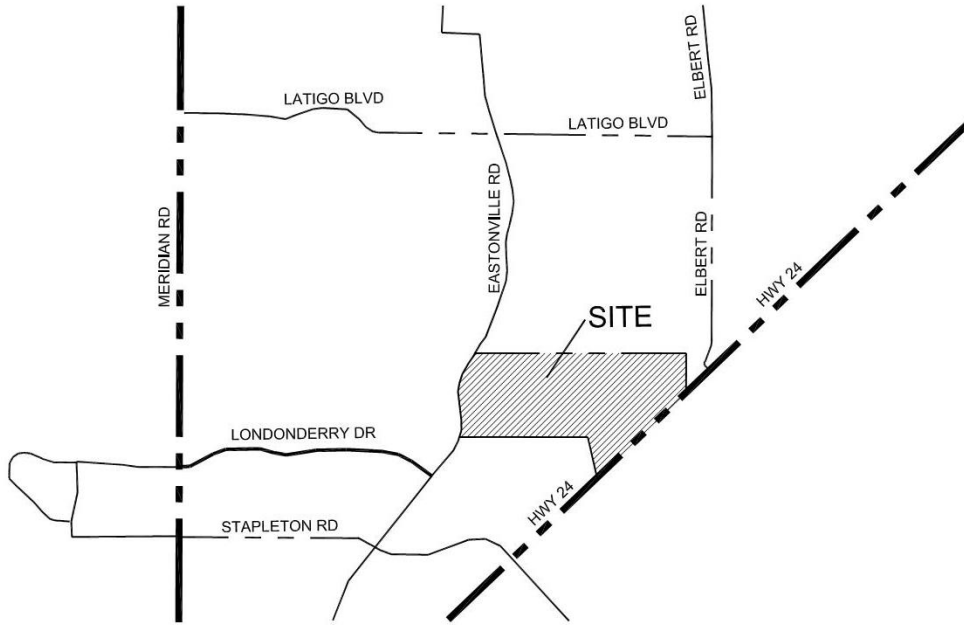

VICINITY MAP

Developer:

4 Site Investments LLC
1271 Kelly Johnson Blvd. #100
Colorado Springs, CO 80920

Applicant/ Civil Engineers:

JR Engineering
5475 Tech Center Drive, Suite 235
Colorado Springs, CO 80919

Site Location, History, Size, Zoning:

The Grandview Reserve project is submitting a Preliminary Plan for 184 lots on 768.23 acres. The site is located between Highway 24 and Eastonville Road, north of Stapleton Drive. The Grandview Reserve site is county zoned RR-2.5 which shall remain permitting minimum lot sizes of 2.5 acres.

The entire site is currently vacant with four existing drainage ways that cross the site in a southeasterly fashion, all of which contain floodplain limits. There are no major stands of vegetation apart from small pockets of plant growth occurring within the two of the existing drainageways. This existing vegetation within the drainage ways will remain as part of the proposed preliminary plan.

These existing drainage ways vary in size and the proposed tracts were sized to contain the floodplains. The drainage ways have been studied to determine if any channel improvements are necessary to mitigate erosive velocities and those improvements are identified in the MDDP/PDR submitted with this application. The model will be updated with these proposed improvements to establish flood elevations and then processed through FEMA to establish Zone AE floodplains within the tracts.

Request & Justification:

The purpose of this application is to request approval of a Preliminary Plan for the Grandview Reserve project. The proposed submittal seeks to approval of 184 lots on 768.23 acres for a density of 0.24 dwelling units per acre. Of this approximately 57 acres will be platted as a tract for future development. All proposed lots shall meet the El Paso County Lands Development Code standards for the RR-2.5 zoning and development standards. The preliminary plan shows the detailed design of the single-family rural residential community and describes the lot sizes, transportation systems, public rights-of way, private roadways, drainage areas, and easements necessary for development.

The site is located within the Falcon/ Peyton Small Area Master Plan under Section 4.4.4 4-Way Ranch Area. This area is identified within the small area plan as Proposed Rural

Clarify the quantity (length/acreage) of the channels that is proposed to be regraded and how much is proposed to be preserved. A table listing jurisdictional/nonjurisdictional wetlands and areas disturbed/preserved/mitigated would be helpful.

Residential Development with Future Development Potential. The small area master plan defines this area as most suitable for rural residential development, with secondary priority growth to be considered if exceptional features such as buffering, transitions, etc. are enough to warrant increased densities. However, the proposed preliminary plan maintains the recommended large lot, rural residential densities proposed by the minimum 2.5 acre sized lots.

The Grandview Reserve plan is also consistent with the El Paso County Policy Plan as it relates to small area plan recommendations, compatibility with surrounding and consistency with Section 6.0 Growth and Land Use Goals as outlined below:

this is a prelim plan and no structures are shown; this statement can not be said at this point or re-phrase

Goal 6.1a: The proposed plan continues the pattern of rural residential growth complementing the area's rural and natural character.

Goal 6.1b: The proposed lots will not burden nor require long term public infrastructure capacities

Goal 6.4: The proposed development maintains the rural residential character with the large lots and limits the burden placed on the natural environment.

The proposed subdivision addresses the approval criteria of LDC Sections 7.2.1 with respects to land use, development standards, water and wastewater, and compatibility with surrounding neighbors as discussed throughout this project narrative. The site plan meets all applicable zoning standards including lot width minimum and setbacks.

There are no areas of significant historical, cultural or recreational features found on site; however, the layout seeks to preserve the existing drainage channels flowing through the site. As part of this preliminary plan, it will be necessary to revise the floodplain limits found within the site. Preservation of these drainage corridors will continue to provide excellent habitat for wildlife. A Natural Features and Wetlands Report is included with this submittal discussing the natural features found on site in more detail.

Wetland are to be preserved? There are jurisdictional wetlands. 404 permit? State feds found habitat unlikely for PMJH. ULTO survey is required...

The existing topography is gently rolling, draining to the south/ southeast with four separate existing drainage ways flowing in the same direction. There is a high point within the site north centrally located that will be utilized to maximize views to the west. The project will require culverts for providing vehicular access across the existing drawings ways. A surface storm sewer system will convey the flows from the proposed development into water quality facilities as required.

The proposed single family rural residential lots will not overburden the capacities of existing or planned roads, utilities or other public features, drainage and grading, police protection, or emergency services as this area has been planned and accounted for rural

Rex Rd does not align with the County and CDOTS plan

present. The Service agrees that the proposed project would not affect ULTO if it is not present where construction activities would intersect wetland and riparian sites. However, ULTO needs three consecutive years of surveys to conclude presence or absence. Application of the above conservation measures as planned for the project, and best management practices would most effectively conserve the riparian habitats in the absence of enough surveying. The Service residential development. Water and wastewater services will be provided for by individual well and individual onsite water treatment systems.

There are **no** geological hazards or potential soil or grading hazards that will require special precautions. Site specific foundation and septic system soil reports will be completed as may be required at the time of building permit.

A Preliminary Soil, Geology, Geologic Hazard and Wastewater Study investigation was prepared by ENTECH Engineering, Inc. dated January 15, 2019. The report identified no geologic hazards that would preclude development of the site for construction of residential structures; however, the report identified existing geologic and engineering geologic conditions that will impose constraints on some development and construction. The most notable constraints that may affect development include artificial fill, loose and expansive soils, slope stability, and shallow ground water. It is noted that development of the site can be achieved with mitigation of potential hazards as illustrated in the report with engineering design and construction methods commonly employed in the area or through the avoidance of these areas. Investigation of each lot is recommended prior to construction.

So how do we approve prelim plan if this has not been identified as potential? Add some notes on Prelim to address, and add language to conclude unlikely habitat in LOI

Not correct

if mitigation include setbacks are followed.

These have been depicted on the preliminary plan graphically

Total Number of Residential Units, Density, and Lot Sizes: 184 Single Family Rural Residential Lots with a Gross Density of 0.24 DU/ Acre. The minimum lot size shall be 2.5 acres as required under the zoning guidelines.

Waiver Requests:

A waiver is being requested for *Section 8.4.4.A, B, C, D* of the EPC Land Development Code to permit Private Roadways within this development as allowed in *Section 8.4.4.E Private Road Allowances*. The waiver request is to specifically permit gated, private roadways with construction of 20' asphalt mat with 6' wide shoulders. The use of the private roads requires a waiver **and will be constructed and maintained to ECM standards**. The purpose of the request for private streets is to create a rural residential ranchette community with gated access to enhance the living experience. The layout of the subdivision coupled with the provided open spaces maximizes the experience through mountain viewshed protection, large acreage of open space and natural land, and low residential density. The request for waivers meets the approval criteria of Land Development Code Section 7.3.3. in that the waiver request does not nullify the intent of the code; does not result in additional waiver requests; and the waiver request will not be detrimental to the health, safety and welfare of the area. Appropriate emergency access will be provided at each gate location as required by local fire protection districts. The proposed alignment of Rex Road will remain open and public through the development and shall be constructed to El Paso County public road requirement standards.

Plan Note states gravel

will not be?

if setbacks are 150 feet from hwy....study assumed 480 feet from highway

January 25, 2019

Traffic and Proposed Access Locations:

A Traffic Impact Study and Noise Impact Study was prepared by LSC Transportation Consultants dated January 11, 2019 and are included as part of this submittal. Per the Noise Impact Study, a noise wall along State Highway 24 will not be required. Rex Road is being shown extending through the site from Eastonville Road east to State Highway 24 and is proposed as a public Rural Major Collector with a Right of Way of 90' as illustrated on the drawings. The traffic impact study provides more detail on traffic patterns and recommended roadway improvements. Internal access will be provided via gated, private driveways as discussed above. The private roadways will be accessible to emergency personnel as required. Rex Road will also provide an access location to the south into the Waterbury development shall access be required or desired in this location.

initially(?) See comment letter.

Types of Proposed Recreational Facilities:

As part of the Grandview Reserve preliminary plan approximately 54 acres are being set aside for natural open space, drainage corridor preservation, and parkland. Much of this open space is the preservation of the existing drainage ways; however, a 11.2 acre community park site is proposed within the central portion of the site. This park will include a looped soft surface trail and a seating area for the residents to enjoy. In addition, an informal soft surface trail system will be developed throughout the project providing opportunities for passive recreation such as walking or jogging.

by and maintained by?

Total Number of Industrial or Commercial Sites:

There are no proposed commercial or industrial sites proposed as a part of the plan.

Flood Hazard/ Floodplain

This site is located within a designated FEMA floodplain as determined by the flood insurance map, community map numbers '08041C0556G' effective date December 7, 2018 and community map number '08041C0552G' effective date December 7, 2018. A LOMR will be submitted for the areas that are currently impacting lots located along the floodplain areas and no lots shall be platted that are impacted by the current floodplain limits. The LOMR will be completed once the model is updated with the proposed improvements to establish flood elevations and then processed through FEMA to establish Zone AE floodplains within the tracts.

Will HOA maintain the drainageways?

Phasing Plan:

The Grandview Reserve project will be developed in one phase but platted in multiple filings which have yet to be determined. The sequence of construction and development is not dependent upon utilities or infrastructure as all lots will utilize individual well and septic systems. Rural roads will be constructed as necessary based upon buyer demand.

Areas of Required Landscaping:

The proposed rural residential development does not require any landscaping.

Approximate Acres and Percent of Land Set Aside for Open Space:

There are no open space minimums required with a straight zone Preliminary Plan; however, there are 54 acres of open space being provided for this development. The primary use of the open space will be for passive recreation such as pedestrian trails, preservation of grassland and drainage.

Water and Wastewater Services:

Each of the rural residential lots will utilize individual well and septic systems for water and wastewater. The proposed subdivision has sufficient water rights and capacity to serve the proposed 184 units. The proposed lots will also utilize onsite wastewater treatment systems (OWTS) as permitted on 2.5 acres by the land development code, as amended. Site specific soil and percolation testing reports and site-specific septic system designs will be completed as required by the El Paso County Health Department. These required reports and detailed design shall be required before a building permit can be granted for new housing structures.

are you requesting a water finding with this prelim plan?

Master Plan for Mineral Extraction:

The 1996 Master Plan for Mineral Extraction updates and supersedes the 1975 El Paso County Master Plan for Mineral Extraction of Commercial Mineral Deposits as amended in 1978 and 1982. This updated plan has two primary purposes, the first is to facilitate continued compliance with the mineral resource protection mandates outlined in the "Preservation of Commercial Mineral Deposits Act" of 1973 and the second is to provide guidance to the EL Paso County Planning Commission and Board of County Commissioners in evaluating land use proposals involving new or expanded mining and mineral resource processing operations. Per the El Paso County Master Plan for Mineral Extraction Aggregate Resource Maps, this site is identified as 'Upland Deposits' containing sand and gravel with silt and clay; remnants of older streams deposited on topographic highs or bench like features. Therefore, the proposed project does not contain any mineral deposits of commercial value and does not permit the use of any area containing a commercial mineral deposit which would unreasonably interfere with the present or future extraction of such deposits.

Proposed Services:

- | | |
|-----------------------|--|
| 1. Water: | Individual Wells |
| 2. Wastewater: | Individual Septic Systems |
| 3. Gas: | Black Hills Energy |
| 4. Electric: | Mountain View Electric Association (MVEA) |
| 5. Fire: | Falcon Fire and Peyton Fire Protection Districts |
| 6. Police Protection: | El Paso County Sheriff's Department |
| 7. School: | Falcon School District #49 |

Markup Summary

dspdparsons (13)

eyton Small Area Master Plan under Sectio
ed within the small area plan as Proposed

Address Water
Master Plan (on-line
copy available)

Subject: Callout
Page Label: 2
Author: dsdparsons
Date: 5/7/2019 10:17:33 AM
Color: ■

Address Water Master Plan (on-line copy available)

These have been depicted on the preliminary plan graphically

Subject: Callout
Page Label: 4
Author: dsdparsons
Date: 5/7/2019 10:18:28 AM
Color: ■

These have been depicted on the preliminary plan graphically

if mitigation including setbacks are followed.

Subject: Callout
Page Label: 4
Author: dsdparsons
Date: 5/7/2019 10:18:52 AM
Color: ■

if mitigation including setbacks are followed.

if setbacks are 150 feet from hwy....study assumed 480 feet from highway

Subject: Callout
Page Label: 5
Author: dsdparsons
Date: 5/7/2019 10:19:26 AM
Color: ■

if setbacks are 150 feet from hwy....study assumed 480 feet from highway

are you requesting a water finding with this preline plan?

Subject: Callout
Page Label: 6
Author: dsdparsons
Date: 5/7/2019 10:20:01 AM
Color: ■

are you requesting a water finding with this prelim plan?

this is a prelim plan and no structures are shown; this statement can not be said at this point or re-phrase

Subject: Cloud+
Page Label: 3
Author: dsdparsons
Date: 5/7/2019 10:21:14 AM
Color: ■

this is a prelim plan and no structures are shown; this statement can not be said at this point or re-phrase

Rex Rd does not align with the County and CDOTS plan

Subject: Callout
Page Label: 3
Author: dsdparsons
Date: 5/7/2019 10:22:28 AM
Color: ■

Rex Rd does not align with the County and CDOTS plan

Not correct

Subject: Callout
Page Label: 4
Author: dsdparsons
Date: 5/7/2019 10:22:43 AM
Color: ■

Not correct

Plan Note states gravel

Subject: Callout
Page Label: 4
Author: dsdparsons
Date: 5/7/2019 10:26:00 AM
Color: ■

Plan Note states gravel

preservation, and parkland. Much of
ng drainage ways; however, a 11.2 acre
total portion of the site. This park will
area for the residents to enjoy. In
will be developed throughout the project
with as walking or jogging.
by and maintained
by?
I sites proposed as a part of the plan.
30dplan as determined by the Flood
12020642 effective date December 7.

Subject: Callout
Page Label: 5
Author: dsdparsons
Date: 5/7/2019 10:26:32 AM
Color: ■

by and maintained by?

Wetland are to be preserved? There are
jurisdictional wetlands. 404 permit? State feds
found habitat unlikely for PMJH. ULTO survey is
required...

Subject: Callout
Page Label: 3
Author: dsdparsons
Date: 5/7/2019 10:57:47 AM
Color: ■

Wetland are to be preserved? There are
jurisdictional wetlands. 404 permit? State feds
found habitat unlikely for PMJH. ULTO survey is
required...

So how do we approve prelim plan if this has not
been identified as potential ? Add some notes on
Prelim to address, and add language to conclude
unlikely habitat in LOI

Subject: Image
Page Label: 4
Author: dsdparsons
Date: 5/7/2019 10:58:50 AM
Color: ■

So how do we approve prelim plan if this has not
been identified as potential ? Add some notes on
Prelim to address, and add language to conclude
unlikely habitat in LOI

Subject: Callout
Page Label: 4
Author: dsdparsons
Date: 5/7/2019 11:00:17 AM
Color: ■

dsdrice (7)

Clarify the quantity (length/acreage) of the
channels that is proposed to be regraded and how
much is proposed to be preserved. A table listing
jd/nonjd wetlands and areas
disturbed/preserved/mitigated would be helpful.

Subject: Cloud+
Page Label: 3
Author: dsdrice
Date: 5/10/2019 11:26:39 AM
Color: ■

Clarify the quantity (length/acreage) of the
channels that is proposed to be regraded and how
much is proposed to be preserved. A table listing
jd/nonjd wetlands and areas
disturbed/preserved/mitigated would be helpful.

within the site nor
west. The project
drawings way. A
development into

Subject: Highlight
Page Label: 3
Author: dsdrice
Date: 5/10/2019 11:27:12 AM
Color: ■

drawings way

no

Subject: Highlight
Page Label: 4
Author: dsdrice
Date: 5/10/2019 11:27:44 AM
Color: ■

no

and will be constructed and maintained to ECM
standards

Subject: Highlight
Page Label: 4
Author: dsdrice
Date: 5/10/2019 11:29:03 AM
Color: ■

and will be constructed and maintained to ECM
standards

will not be?

Subject: Callout
Page Label: 4
Author: dsdrice
Date: 5/10/2019 11:29:19 AM
Color: ■

will not be?

maps, and any other maps, were not prepared or...
dated January 21, 2019 and are included as part of this submittal.
Study, a note will along State Highway 24 will not be required
have extended through the site from Interstate Road east to the
proposed public Rural Major Collector with a Right of Way of 1
2 on the subject. The traffic impact study provides more detail on
and recommended roadway improvements. Internal access will be
private driveway, as discussed above. The private roadway will
only personnel as required. The Road will also provide an access to
into the Wetland's Department and access for required or other
initially(?) See
comment letter.

Proposed Recreational Facilities:
The Graduate Reserve provides approximately 54 acres of
natural open space, drainage control, greenways, and parkland.
that is the preservation of the existing drainage ways, however,
the road will be constructed within the existing footprint of the site.

Subject: Callout
Page Label: 5
Author: dsdrice
Date: 5/10/2019 11:31:24 AM
Color: ■

initially(?) See comment letter.

34109532/ effective date December 7, 2018. A
hat are currently impacting lots located along the
road that are impacted by the current floodplain
ce the model is updated with the proposed
signs and then processed through FEMA to
e track.

**Will HOA maintain
the drainageways?**

developed in one phase but platted in multiple
s. The sequence of construction and
sites or infrastructure as all lots will utilize
of roads will be constructed as necessary based

Subject: Callout
Page Label: 5
Author: dsdrice
Date: 5/10/2019 11:33:49 AM
Color: ■

Will HOA maintain the drainageways?